

# Mechanized Denotation and Circuit Staging for an $N$ -Bounded Linear Quantum $\lambda$ -Fragment in Lean 4

Lars Warren Ericson  
Independent researcher, d/b/a Catskills Research Company  
lars.ericson@catskillsresearch.com  
ORCID 0000-0001-8299-9361

September 2026

## Abstract

We present a Lean 4 formalization of a typed linear/nonlinear quantum  $\lambda$ -calculus and a completed denotational and staging package for a first-order fragment of programs that use at most  $N$  live qubits. Separate unrestricted and linear contexts prevent implicit copy or discard of quantum data. The full language includes recursive types and `fix`; the fragment treated denotationally excludes them. Probability arises only from measurement. Kernel-checked foundations include quantum relations, a compact-closed `Set`  $\dashv$  `qRel` model, quantum CPOs, and finite completely positive maps; these do not yet form one model of the full language. For the fragment we check a `Route~A` CP-presheaf denotation (`FragCert.denote`), the `UsesAtMostQubits`  $N$ -qubit resource bound, measured `new0` Born adequacy, staging of successfully elaborated closed terms to IBM Composer/OpenQASM, and Hom-to-ideal-CQ agreement on a declared quotation covering set, including two-wire circuit completeness. Full-language bang/LNL, recursive-type denotation, higher-order adequacy, and full abstraction remain objectives behind `AmbientCP Day-bang glue`. The mechanization gives new Lean proofs of quantum-relation complete-hom lattices, bilateral join-continuity of composition, dagger reversal, quantum function composition, and discrete `qCPO` completeness. To our knowledge this is the first machine-checked compact-closed `Set`  $\dashv$  `qRel` adjunction in this representation, and the first certified typed lambda quotation theorem for the declared two-wire Composer fragment; priority wording is limited by the literature audit below. Sources: <https://github.com/catskillsresearch/qlambda>.

**Keywords.** Lean 4; formal verification; quantum lambda calculus; linear types; CP-presheaf semantics; OpenQASM; quantum relations; quantum CPO.

# Contents

|          |                                                                                        |             |
|----------|----------------------------------------------------------------------------------------|-------------|
| <b>1</b> | <b>Introduction</b>                                                                    | <b>4</b>    |
| 1.1      | Contributions . . . . .                                                                | 4           |
| 1.2      | Scope . . . . .                                                                        | 5           |
| 1.3      | Lean development structure . . . . .                                                   | 5           |
| <b>2</b> | <b>The Typed Linear Language</b>                                                       | <b>6</b>    |
| 2.1      | Contexts and typing . . . . .                                                          | 6           |
| 2.2      | Substitution and source safety . . . . .                                               | 7           |
| 2.3      | Theorem dependence . . . . .                                                           | 7           |
| 2.4      | Blueprint declarations — Typed linear language . . . . .                               | 8           |
| <b>3</b> | <b>Finite Quantum Runtime</b>                                                          | <b>107</b>  |
| 3.1      | Theorem dependence . . . . .                                                           | 107         |
| 3.2      | Blueprint declarations — Finite quantum runtime . . . . .                              | 108         |
| <b>4</b> | <b>Quantum Sets, Relations, and qCPOs</b>                                              | <b>171</b>  |
| 4.1      | Formalized relation algebra . . . . .                                                  | 171         |
| 4.2      | Quantum posets and completeness . . . . .                                              | 172         |
| 4.3      | Theorem dependence . . . . .                                                           | 172         |
| 4.4      | Blueprint declarations — Quantum sets, relations, and qCPOs . . . . .                  | 172         |
| <b>5</b> | <b>Type-Indexed Denotation and Recursive Types</b>                                     | <b>1039</b> |
| 5.1      | Target compositional semantics . . . . .                                               | 1040        |
| 5.2      | Theorem dependence (Route A fragment) . . . . .                                        | 1041        |
| 5.3      | Blueprint declarations — Type-indexed denotation and the $N$ -qubit fragment . . . . . | 1041        |
| <b>6</b> | <b>Deterministic Staging to Circuits</b>                                               | <b>1328</b> |
| 6.1      | Theorem dependence . . . . .                                                           | 1328        |
| 6.2      | Blueprint declarations — Deterministic staging to circuits . . . . .                   | 1328        |
| <b>7</b> | <b>Circuit Reflection and Completeness</b>                                             | <b>1352</b> |
| 7.1      | Theorem dependence . . . . .                                                           | 1352        |
| 7.2      | Blueprint declarations — Circuit reflection, quotation, and completeness . . . . .     | 1354        |
| <b>8</b> | <b>Composer and OpenQASM Interchange</b>                                               | <b>1404</b> |
| 8.1      | Theorem dependence . . . . .                                                           | 1404        |
| 8.2      | Blueprint declarations — Composer and OpenQASM interchange . . . . .                   | 1405        |
| <b>9</b> | <b>Mechanized Claims and Release Boundary</b>                                          | <b>1456</b> |
| 9.1      | Semantic objectives . . . . .                                                          | 1457        |
| 9.2      | Palomar compared statements . . . . .                                                  | 1458        |
| 9.3      | Claim-surface dependence . . . . .                                                     | 1460        |
| 9.4      | Blueprint declarations — Supporting quantum primitives . . . . .                       | 1461        |
| 9.5      | Blueprint declarations — Palomar challenge and solution . . . . .                      | 1463        |

|                                                  |             |
|--------------------------------------------------|-------------|
| <b>10 Related Work and Novelty Qualification</b> | <b>1522</b> |
| <b>11 References</b>                             | <b>1522</b> |
| <b>12 Acknowledgments</b>                        | <b>1523</b> |
| <b>A Lean module index</b>                       | <b>1524</b> |
| A.1 QLambda project and Palomar . . . . .        | 1524        |

## List of Figures

|    |                                                                                                                                                 |      |
|----|-------------------------------------------------------------------------------------------------------------------------------------------------|------|
| 1  | Layered Lean development: checked $N$ -bounded fragment path (solid) . . . . .                                                                  | 5    |
| 2  | Section 2 theorem dependence: typing and substitution support . . . . .                                                                         | 7    |
| 3  | Lean module dependencies for §2 (typed linear language). Amber box: Mathlib imports (8 listed). Blue box: project modules (35). . . . .         | 8    |
| 4  | Section 3 theorem dependence: register dynamics support internal . . . . .                                                                      | 108  |
| 5  | Lean module dependencies for §3 (finite quantum runtime). Amber box: Mathlib imports (16 listed). Blue box: project modules (12). . . . .       | 109  |
| 6  | Section 4 theorem dependence: quantum-relation algebra supports the . . . . .                                                                   | 173  |
| 7  | Lean module dependencies for §4 (quantum relations and qCPOs). Amber box: Mathlib imports (34 listed). Blue box: project modules (208). . . . . | 174  |
| 8  | Section 5 checked-fragment theorem dependence culminating in the . . . . .                                                                      | 1042 |
| 9  | Lean module dependencies for §5 (fragment denotation). Amber box: Mathlib imports (10 listed). Blue box: project modules (31). . . . .          | 1043 |
| 10 | Section 6 theorem dependence: successful elaboration yields . . . . .                                                                           | 1329 |
| 11 | Lean module dependencies for §6 (staging to circuits). Amber box: Mathlib imports (2 listed). Blue box: project modules (5). . . . .            | 1329 |
| 12 | Section 7 theorem dependence. <code>Quotation.quotation_capstone</code> . . . . .                                                               | 1353 |
| 13 | Lean module dependencies for §7 (quotation and completeness). Amber box: Mathlib imports (6 listed). Blue box: project modules (6). . . . .     | 1353 |
| 14 | Section 8 theorem dependence: canonical OpenQASM render/parse . . . . .                                                                         | 1404 |
| 15 | Lean module dependencies for §8 (Composer / OpenQASM). Amber box: Mathlib imports (5 listed). Blue box: project modules (10). . . . .           | 1405 |
| 16 | Section 9 claim-surface dependence. The Comparator selects the . . . . .                                                                        | 1460 |
| 17 | Lean module dependencies for §9 (supporting primitives). Amber box: Mathlib imports (5 listed). Blue box: project modules (3). . . . .          | 1461 |
| 18 | Lean module dependencies for Palomar challenge / solution. Amber box: Mathlib imports (4 listed). Blue box: project modules (2). . . . .        | 1463 |

# 1 Introduction

Quantum programming combines two incompatible structural regimes. Classical data may be weakened and contracted; unknown quantum data may not be copied, and its disposal must be represented by a physical operation. A semantics that puts both kinds of values in an ordinary Cartesian context obscures this distinction. We instead use a linear/nonlinear judgment

$$\Gamma; \Delta \vdash M : A,$$

where  $\Gamma$  contains unrestricted assumptions and  $\Delta$  contains exactly-once assumptions. The semantic objective assigns a derivation a morphism

$$F[\Gamma] \otimes [\Delta] \longrightarrow [A]$$

in a CP-enriched,  $\omega$ CPO-enriched LNL model. That full model remains the long-term target; the kernel-checked deliverable of this paper is the  $N$ -bounded first-order fragment package summarized above.

This is a typed, type-indexed account. It does not use a universal untyped reflexive object. In the intended model, each admissible recursive type has its own approximation chain, quantum evolution is represented by linear morphisms, and measurement is the source of probabilistic branching. The present Lean development establishes the source metatheory and supporting categorical components but does not yet assemble that intended model.

## 1.1 Contributions

The development has five connected parts.

1. It gives a Church-style linear/nonlinear quantum  $\lambda$ -calculus with de Bruijn syntax, verified formation predicates for recursive types, substitution, preservation, and a finite-register operational semantics.
2. It formalizes quantum-set and quantum-relation algebra, including complete hom orders,  $\omega$ -continuous composition, compact closure, the concrete  $\text{Set} \dashv \text{qRel}$  LNL model, and a separate category of quantum CPOs and Scott-continuous quantum functions.
3. It gives a Route~A CP-presheaf denotation for a first-order fragment (no  $\mu/\text{fix}$ ), including classical-bit Day comonoid contexts, closed  $\beta/\text{Step}$  packaging, measured new0 Born adequacy, and an  $N$ -qubit staging interface (`n_qubit_fragment_denotation_openqasm_interface`).
4. It constructs a deterministic, resource-certified staging procedure from closed elaborable fragment terms to circuit normal form and OpenQASM, with  $\text{Hom} \Rightarrow \text{CQ}$  agreement on a declared quotation covering set.
5. It gives canonical typed lambda quotation for a two-wire circuit fragment and a structured Composer/OpenQASM interchange with ideal classical–quantum denotation and canonical parse/render theorems.

The first substantial formalization obligation not available as an off-the-shelf machine-checked library was the enriched algebra of quantum relations. Weaver, Kornell, Jenča–Lindhovius, and Kornell–Lindhovius–Mislove prove stronger paper-level categorical results, but provide no Lean implementation of the chosen matrix/subspace representation. We prove the complete hom lattice, bilateral join-continuity


of composition, closure of functions under composition, and the discrete-qCPO instance directly. The higher-order development further proves explicit tensor, evaluation/currying, unitors, associator, braiding, and the ordinary strong monoidal adjunction. In particular it does not use the false route from pointwise-ordered continuous maps to graph relations: graph is used from a discretely ordered ordinary set category.

## 1.2 Scope

The headline claim is the  $N$ -bounded fragment package above, not a finished domain semantics of the full language. “Circuit completeness” means that every circuit in the declared finite target fragment (presently the supported two-wire Composer quotation surface) has a canonical well-typed lambda representative. It does not mean that every unitary has an exact finite decomposition, nor that every fragment term elaborates. OpenQASM is an interchange format here, not the denotational semantics, and no result concerns calibration, noise, transpiler heuristics, or arbitrary Python/Qiskit programs. The AmbientCP / Track~L path is the intended extension to bang, recursive types, and full-language adequacy; it is open, not abandoned.

## 1.3 Lean development structure

The mechanization is layered. Source metatheory and the finite runtime sit above a quantum-relation / qCPO substrate and a CP-presheaf fragment model; staging and quotation connect the fragment to Composer/OpenQASM. Track~L bang glue is deferred and does not block the  $N$ -bounded package.

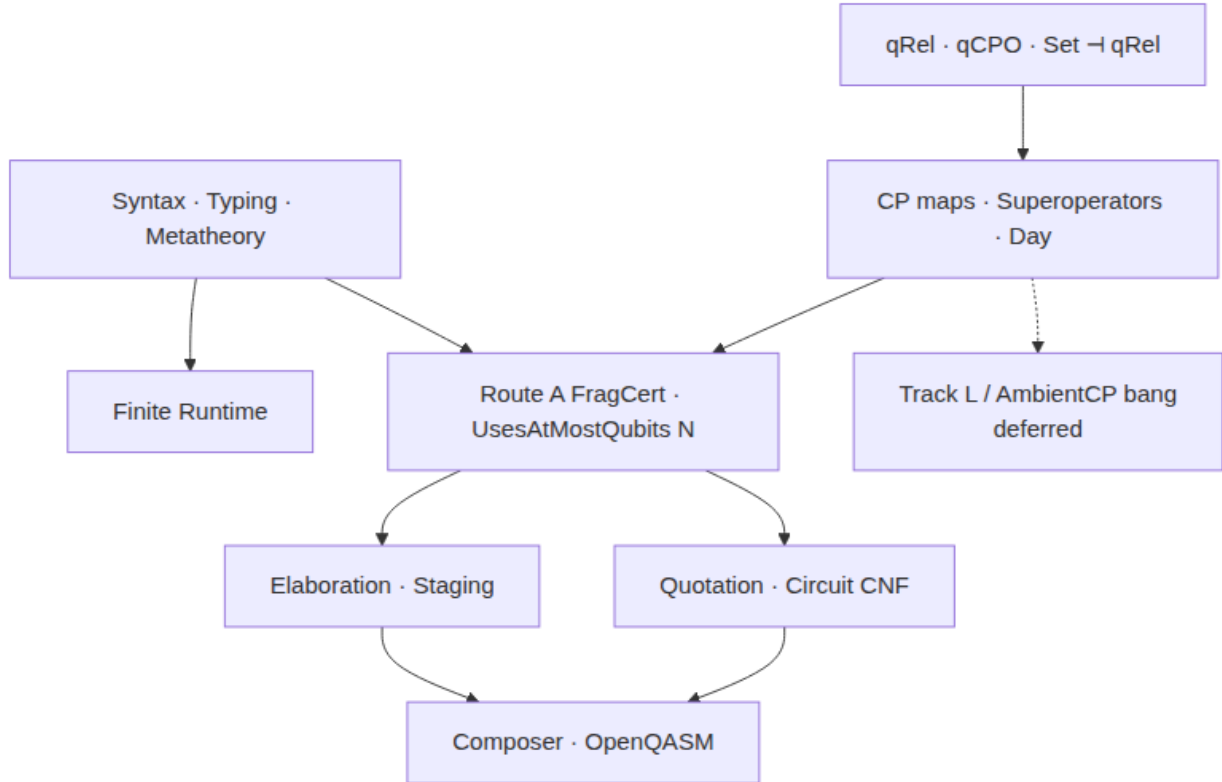

**Figure 1:** Layered Lean development: checked  $N$ -bounded fragment path (solid)

versus deferred Track~L bang glue (dashed).

## 2 The Typed Linear Language

The binder mode, types, physical constants, terms, and values are:

$$\kappa ::= \text{lin} \mid \text{unres},$$

$$A, B ::= \alpha \mid 1 \mid \text{Bit} \mid \text{Qubit} \mid A \otimes B \mid A \multimap B \mid A \rightarrow B \mid \mu\alpha.A.$$

Here  $A \multimap B$  abbreviates  $\text{arrow}(\text{lin}, A, B)$  and  $A \rightarrow B$  abbreviates  $\text{arrow}(\text{unres}, A, B)$ . Recursive type variables use de Bruijn indices;  $\mu A$  binds type index zero in  $A$ .

$$p ::= \text{new0} \mid \text{X} \mid \text{H} \mid \text{T} \mid \text{RY}(r) \mid \text{CX} \mid \text{reset}, \quad r \in \mathbb{Q},$$

$$\begin{aligned} M, N, K ::= & x_n^\kappa \mid \lambda^\kappa(A).M \mid M N \mid \langle \rangle \mid \text{bit}(b) \\ & \mid \langle M, N \rangle \mid \text{unpair } M K \mid \text{if } M \text{ then } N \text{ else } K \\ & \mid p \mid \text{measure } M K \mid \text{fix}_A M \mid \text{fold}_A M \mid \text{unfold } M, \quad b \in \{\text{false}, \text{true}\}. \end{aligned}$$

Term variables use separate de Bruijn indices in the unrestricted and linear contexts, selected by  $\kappa$ . Lambda is the only term binder. The eliminator  $\text{unpair } M K$  applies the curried linear continuation  $K : A \multimap B \multimap C$  to the two components of  $M : A \otimes B$ . Similarly,  $\text{measure } M K$  consumes  $M : \text{Qubit}$  and invokes  $K : \text{Bit} \rightarrow \text{Qubit} \multimap A$ : the measured bit is unrestricted, while the post-measurement qubit remains linear.

The constants have the following complete source types:

$$\begin{array}{ll} \text{new0} & : 1 \multimap \text{Qubit} \\ \text{CX} & : \text{Qubit} \multimap \text{Qubit} \multimap (\text{Qubit} \otimes \text{Qubit}) \end{array} \quad \begin{array}{ll} \text{X, H, T, RY}(r) & : \text{Qubit} \multimap \text{Qubit} \\ \text{reset} & : \text{Qubit} \multimap \text{Qubit}. \end{array}$$

The call-by-value values are

$$V, W ::= \langle \rangle \mid \text{bit}(b) \mid \lambda^\kappa(A).M \mid \langle V, W \rangle \mid p \mid \text{fold}_A V.$$

Qubits are not closed source values; runtime wire handles inhabit the machine boundary. Probability is likewise absent from the term grammar and appears only on measurement transitions. There is no `emit`, source sequencing primitive, probabilistic choice, internal choice, or external choice.

### 2.1 Contexts and typing

Typing judgments have the form

$$\Gamma; \Delta \vdash M : A, \quad \Gamma ::= \cdot \mid \Gamma, A, \quad \Delta ::= \cdot \mid \Delta, \_ \mid \Delta, A.$$

The unrestricted context  $\Gamma$  is a list of types. The linear context  $\Delta$  is a position-preserving list of optional types: an empty cell `_` records a consumed or absent de Bruijn position.

Unrestricted variables may be weakened and contracted. A linear context is a list of optional type cells; context splitting partitions occupied cells while preserving de Bruijn positions. Linear application and tensor introduction split the linear context. An unrestricted closure may not capture live linear resources.

Lean declarations are concentrated in:

- `QLambda/Linear/Syntax.lean`;
- `QLambda/Linear/Context.lean`;
- `QLambda/Linear/Typing.lean`;
- `QLambda/Linear/TypeFormation.lean`.

The executable type checker is connected to the proof-level typing relation. Negative examples include cloning a qubit and capturing a live qubit in an unrestricted function.


## 2.2 Substitution and source safety

The formal substitution proof distinguishes used and unused linear variables. It includes split rotation, all-none transport, linear substitution, and unrestricted substitution with empty linear support. These results imply preservation for deterministic source reduction and for measurement-labelled transitions.

For every closed well-typed term, including terms that use `fix` and  $\mu$ , progress yields either a value, a classical step, or a genuine quantum blocking point. A primitive application is recorded as that quantum boundary. Together with preservation and classical determinism, this is the compared theorem `QLambda.Palomar.source_type_safety`.


## 2.3 Theorem dependence

The Palomar-facing type-safety package sits on preservation, progress, and determinism; those in turn rest on substitution and the typing judgment.

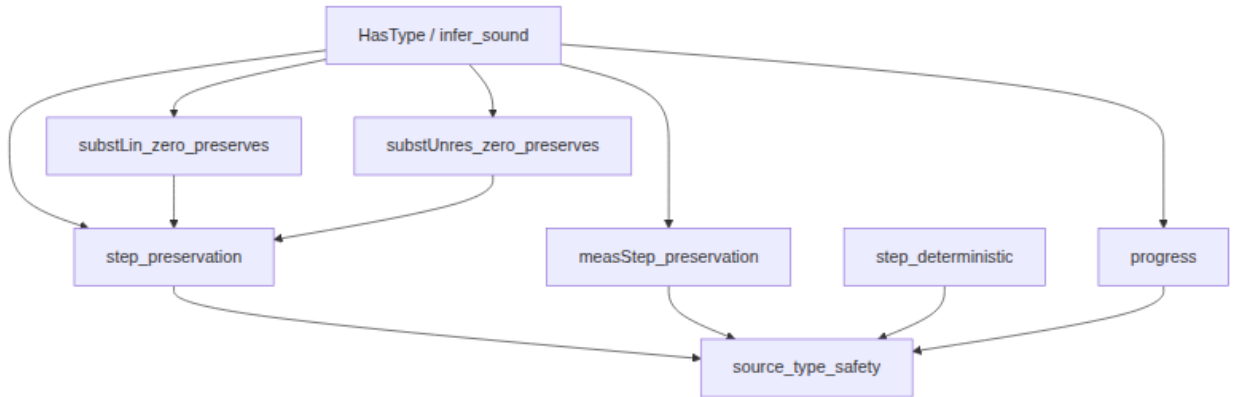

**Figure 2:** Section 2 theorem dependence: typing and substitution support

preservation/progress; `source_type_safety` packages the closed-program capstone.



*Auto-generated from the Lean sources (205 declarations). Each card states the result in mathematical English and explains the idea of its proof or construction; the Lean source follows each card.*

**Definition.** The inductive family of context lookups.

Lean 4 source `QLambda/Linear/Context.lean`

### 2.4.2 Every cell is absent, so the term uses no linear variable

**Definition.** Every cell is absent, so the term uses no linear variable.

**Construction.** Defined by cases on the input:  $[] \mapsto \text{True}$ ;  $\text{none} :: \Delta \mapsto$  the empty usage mask of  $\Delta$ ;  $\text{some } _ \mapsto \text{False}$ .

8



```

def AllNone : List (Option Ty) -> Prop
| [] => True
| none :: Delta => AllNone Delta
| some _ :: _ => False

```

### 2.4.3 The only occupied cell of a linear context is index n

**Definition.** The only occupied cell of a linear context is index n.

**Construction.** Defined by cases on the input:  $[]$ ,  $\_ \mapsto \text{True}$ ;  $\text{some } \_ :: \Delta$ ,  $0 \mapsto$  the empty usage mask of  $\Delta$ ;  $\text{none} :: \_$ ,  $0 \mapsto \text{False}$ ;  $\text{some } \_ :: \_$ ,  $\_ + 1 \mapsto \text{False}$ ;  $\text{none} :: \Delta$ ,  $n + 1 \mapsto$  the single-cell usage mask of  $\Delta$  and n.

**Lean 4 source** [QLambda/Linear/Context.lean](#)

```

def OnlySomeAt : List (Option Ty) -> Nat -> Prop
| [], _ => True
| some _ :: Delta, 0 => AllNone Delta
| none :: _, 0 => False
| some _ :: _, _ + 1 => False
| none :: Delta, n + 1 => OnlySomeAt Delta n

```

### 2.4.4 A use-respecting partition of a linear context

**Definition.** A use-respecting partition of a linear context.

**Construction.** Generated by the rules `nil` (the empty split), `none` (an absent cell shared by both parts), `left` (an occupied cell sent to the left part) and `right` (an occupied cell sent to the right part). Every element arises from finitely many applications of these rules, so properties are proved by induction over them.

**Lean 4 source** [QLambda/Linear/Context.lean](#)

```

inductive OSplit :
  List (Option Ty) -> List (Option Ty) -> List (Option Ty) -> Prop where
| nil : OSplit [] [] []
| none {Delta Delta_1 Delta_2} :
  OSplit Delta Delta_1 Delta_2 -> OSplit (none :: Delta) (none :: Delta_1) (none
  :: Delta_2)
| left {A Delta Delta_1 Delta_2} :
  OSplit Delta Delta_1 Delta_2 -> OSplit (some A :: Delta) (some A :: Delta_1) (
  none :: Delta_2)
| right {A Delta Delta_1 Delta_2} :
  OSplit Delta Delta_1 Delta_2 -> OSplit (some A :: Delta) (none :: Delta_1) (
  some A :: Delta_2)

```

### 2.4.5 A looked-up entry is a member of the list

**Statement.** For a natural number n: if position n of  $xs$  holds a, then  $a \in xs$ .

**Proof.** By induction on the derivation that position n of  $xs$  holds a. For a lookup at the head, the claim is checked directly; for a lookup in the tail, the claim follows from the induction hypothesis. It follows from membership at the head of a list and the definition of the tail.

#### Lean 4 source `QLambda/Linear/Context.lean`

```
theorem Lookup.mem {a : Type} {xs : List a} {n : Nat} {a : a}
  (h : Lookup xs n a) : a in xs := by
  induction h with
  | zero => exact List.Mem.head _
  | succ _ ih => exact List.Mem.tail _ ih
```

### 2.4.6 A successful lookup position lies below the length of the list

**Statement.** For a natural number  $n$ : if position  $n$  of  $xs$  holds  $a$ , then  $n < xs.length$ .

**Proof.** By induction on the derivation that position  $n$  of  $xs$  holds  $a$ . The case of a lookup at the head is immediate; for a lookup in the tail, the claim follows from the induction hypothesis.

#### Lean 4 source `QLambda/Linear/Context.lean`

```
theorem Lookup.lt_length {a : Type} {xs : List a} {n : Nat} {a : a}
  (h : Lookup xs n a) : n < xs.length := by
  induction h with
  | zero => simp
  | succ _ ih => simp using Nat.succ_lt_succ ih
```

### 2.4.7 Both parts of an ordered context split have the length of the whole context

**Statement.** For linear contexts  $\Delta, \Delta_1, \Delta_2$ : if  $\Delta$  splits into the left part  $\Delta_1$  and the right part  $\Delta_2$ , then the length of  $\Delta_1$  equals  $\Delta.length \wedge \Delta_2.length = \Delta.length$ .

**Proof.** By induction on the derivation that  $\Delta$  splits into the left part  $\Delta_1$  and the right part  $\Delta_2$ . The case of the empty split is immediate; for an absent cell shared by both parts, an occupied cell sent to the left part and an occupied cell sent to the right part, the claim follows from the induction hypothesis.

#### Lean 4 source `QLambda/Linear/Context.lean`

```
theorem OSplit.lengths {Delta Delta_1 Delta_2 : List (Option Ty)}
  (h : OSplit Delta Delta_1 Delta_2) :
  Delta_1.length = Delta.length /\ Delta_2.length = Delta.length := by
  induction h with
  | nil => exact <rfl, rfl>
  | none _ ih | left _ ih | right _ ih =>
    exact <by simp [ih.1], by simp [ih.2]>
```

### 2.4.8 Ordered context splits are symmetric in their two parts

**Statement.** For linear contexts  $\Delta, \Delta_1, \Delta_2$ : if  $\Delta$  splits into the left part  $\Delta_1$  and the right part  $\Delta_2$ , then  $\Delta$  splits into the left part  $\Delta_2$  and the right part  $\Delta_1$ .

**Proof.** By induction on the derivation that  $\Delta$  splits into the left part  $\Delta_1$  and the right part  $\Delta_2$ . The case of the empty split is immediate; for an absent cell shared by both parts, applying the same rule to the induction hypothesis gives the claim; for an occupied cell sent to the left part, applying the rule for an occupied cell sent to the right part to the induction hypothesis gives the claim; for an occupied cell sent to

the right part, applying the rule for an occupied cell sent to the left part to the induction hypothesis gives the claim.

#### Lean 4 source `QLambda/Linear/Context.lean`

```
theorem OSplit.symm {Delta Delta_1 Delta_2 : List (Option Ty)}
  (h : OSplit Delta Delta_1 Delta_2) : OSplit Delta Delta_2 Delta_1 := by
  induction h with
  | nil => exact .nil
  | none _ ih => exact .none ih
  | left _ ih => exact .right ih
  | right _ ih => exact .left ih
```

### 2.4.9 An empty usage mask is a constant list of absent cells

**Statement.** For a linear context  $\Delta$ : if  $\Delta$  is an empty usage mask, then  $\Delta$  equals the constant list of the length of  $\Delta$  and `none`.

**Proof.** By induction on the linear context  $\Delta$ . The case of the empty context is immediate; for a context extended by one cell, the claim follows from the induction hypothesis. The key step rewrites with the definition of the empty usage mask.

#### Lean 4 source `QLambda/Linear/Context.lean`

```
theorem allNone_eq_replicate (Delta : List (Option Ty)) (h : AllNone Delta) :
  Delta = List.replicate Delta.length none := by
  induction Delta with
  | nil => rfl
  | cons cell Delta ih =>
    cases cell with
    | none =>
      simp only [AllNone] at h
      change none :: Delta = none :: List.replicate Delta.length none
      rw [ih h]
      simp
    | some _ => simp [AllNone] at h
```

### 2.4.10 Empty usage masks of equal length coincide

**Statement.** For linear contexts  $\Delta_1, \Delta_2$ : if  $\Delta_1$  is an empty usage mask;  $\Delta_2$  is an empty usage mask; and  $\Delta_1.length = \Delta_2.length$ , then  $\Delta_1 = \Delta_2$ .

**Proof.** The key step rewrites with the fact that an empty usage mask is a constant list of absent cells and the hypothesis that  $\Delta_1.length = \Delta_2.length$ .

#### Lean 4 source `QLambda/Linear/Context.lean`

```
theorem allNone_unique {Delta_1 Delta_2 : List (Option Ty)}
  (h_1 : AllNone Delta_1) (h_2 : AllNone Delta_2)
  (hlen : Delta_1.length = Delta_2.length) : Delta_1 = Delta_2 := by
  rw [allNone_eq_replicate Delta_1 h_1, allNone_eq_replicate Delta_2 h_2, hlen]
```

### 2.4.11 Empty left mask determines an ordered context split from the right

**Statement.** For linear contexts  $\Delta, \Delta_1, \Delta_2$ : if  $\Delta$  splits into the left part  $\Delta_1$  and the right part  $\Delta_2$  and  $\Delta_1$  is an empty usage mask, then  $\Delta = \Delta_2$ .

**Proof.** By induction on the derivation that  $\Delta$  splits into the left part  $\Delta_1$  and the right part  $\Delta_2$ . The case of the empty split is immediate; for an absent cell shared by both parts and an occupied cell sent to the right part, the claim follows from the induction hypothesis; the case of an occupied cell sent to the left part cannot occur, since it contradicts the hypothesis that  $\Delta_1$  is an empty usage mask. The goal is simplified using the definition of the empty usage mask.

**Lean 4 source** `QLambda/Linear/Context.lean`

```
theorem OSplit.eq_right_of_allNone_left {Delta Delta_1 Delta_2 : List (Option Ty)}
  (hs : OSplit Delta Delta_1 Delta_2) (h_1 : AllNone Delta_1) :
  Delta = Delta_2 := by
  induction hs with
  | nil => rfl
  | none _ ih =>
    simp only [AllNone] at h_1
    simp [ih h_1]
  | left _ _ => simp [AllNone] at h_1
  | right _ ih =>
    simp only [AllNone] at h_1
    simp [ih h_1]
```

### 2.4.12 Empty right mask determines an ordered context split from the left

**Statement.** For linear contexts  $\Delta, \Delta_1, \Delta_2$ : if  $\Delta$  splits into the left part  $\Delta_1$  and the right part  $\Delta_2$  and  $\Delta_2$  is an empty usage mask, then  $\Delta = \Delta_1$ .

**Proof.** Apply, in order, “ordered context splits are symmetric in their two parts” and “empty left mask determines an ordered context split from the right” to the hypothesis that  $\Delta$  splits into the left part  $\Delta_1$  and the right part  $\Delta_2$ , together with the hypothesis that  $\Delta_2$  is an empty usage mask.

**Lean 4 source** `QLambda/Linear/Context.lean`

```
theorem OSplit.eq_left_of_allNone_right {Delta Delta_1 Delta_2 : List (Option Ty)}
  (hs : OSplit Delta Delta_1 Delta_2) (h_2 : AllNone Delta_2) :
  Delta = Delta_1 :=
  hs.symm.eq_right_of_allNone_left h_2
```

### 2.4.13 Every linear context splits as itself together with an empty right mask

**Statement.** For a linear context  $\Delta$ :  $\Delta$  splits into the left part  $\Delta$  and the right part `List.replicate Δ.length Option.none`.

**Proof.** By induction on the linear context  $\Delta$ . The case of the empty context is immediate; for a context extended by one cell, the claim follows from the induction hypothesis. The goal is simplified using the recursion equation for constant lists.

**Lean 4 source** `QLambda/Linear/Context.lean`

```

theorem OSplit.withNoneRight (Delta : List (Option Ty)) :
  OSplit Delta Delta (List.replicate Delta.length (Option.none : Option Ty)) := by
  induction Delta with
  | nil => exact .nil
  | cons cell Delta ih =>
    cases cell with
    | none => simpa [List.replicate_succ] using OSplit.none ih
    | some A => simpa [List.replicate_succ] using OSplit.left ih

```

#### 2.4.14 A constant list of absent cells is an empty usage mask

**Statement.** For a natural number  $n$ :  $\text{List.replicate } n \text{ Option.none}$  is an empty usage mask.

**Proof.** By induction on the natural number  $n$ . The case of zero is immediate; for a successor, the claim is checked directly. The goal is simplified using the recursion equation for constant lists and the definition of the empty usage mask.

##### Lean 4 source `QLambda/Linear/Context.lean`

```

theorem allNone_replicate_none (n : Nat) :
  AllNone (List.replicate n (Option.none : Option Ty)) := by
  induction n with
  | zero => trivial
  | succ n ih => simpa [List.replicate_succ, AllNone]

```

#### 2.4.15 Every type used in the left part of a split occurs in the whole context

**Statement.** For linear contexts  $\Delta, \Delta_1, \Delta_2$ , a type  $A$ : if  $\Delta$  splits into the left part  $\Delta_1$  and the right part  $\Delta_2$  and some  $A \in \Delta_1$ , then some  $A \in \Delta$ .

**Proof.** By induction on the derivation that  $\Delta$  splits into the left part  $\Delta_1$  and the right part  $\Delta_2$ . The case of the empty split cannot occur, since it contradicts the hypothesis that some  $A \in \Delta_1$ ; for an absent cell shared by both parts, an occupied cell sent to the left part and an occupied cell sent to the right part, the claim follows from the induction hypothesis. It follows from the definition of the tail and membership at the head of a list.

##### Lean 4 source `QLambda/Linear/Context.lean`

```

theorem OSplit.mem_left {Delta Delta_1 Delta_2 : List (Option Ty)} (h : OSplit Delta
  Delta_1 Delta_2)
  {A : Ty} (hm : some A in Delta_1) : some A in Delta := by
  induction h with
  | nil => cases hm
  | none _ ih =>
    cases hm with
    | tail _ hm => exact List.Mem.tail _ (ih hm)
  | left _ ih =>
    cases hm with
    | head => exact List.Mem.head _
    | tail _ hm => exact List.Mem.tail _ (ih hm)
  | right h ih =>
    cases hm with
    | tail _ hm => exact List.Mem.tail _ (ih hm)

```

#### 2.4.16 Every type used in the right part of a split occurs in the whole context

**Statement.** For linear contexts  $\Delta$ ,  $\Delta_1$ ,  $\Delta_2$ , a type  $A$ : if  $\Delta$  splits into the left part  $\Delta_1$  and the right part  $\Delta_2$  and some  $A \in \Delta_2$ , then some  $A \in \Delta$ .

**Proof.** By induction on the derivation that  $\Delta$  splits into the left part  $\Delta_1$  and the right part  $\Delta_2$ . The case of the empty split cannot occur, since it contradicts the hypothesis that some  $A \in \Delta_2$ ; for an absent cell shared by both parts, an occupied cell sent to the left part and an occupied cell sent to the right part, the claim follows from the induction hypothesis. It follows from the definition of the tail and membership at the head of a list.

#### Lean 4 source `QLambda/Linear/Context.lean`

```
theorem OSplit.mem_right {Delta Delta_1 Delta_2 : List (Option Ty)} (h : OSplit Delta
  Delta_1 Delta_2)
  {A : Ty} (hm : some A in Delta_2) : some A in Delta := by
  induction h with
  | nil => cases hm
  | none _ ih =>
    cases hm with
    | tail _ hm => exact List.Mem.tail _ (ih hm)
  | left h ih =>
    cases hm with
    | tail _ hm => exact List.Mem.tail _ (ih hm)
  | right _ ih =>
    cases hm with
    | head => exact List.Mem.head _
    | tail _ hm => exact List.Mem.tail _ (ih hm)
```

#### 2.4.17 An empty mask splits as itself on both sides

**Statement.** For a linear context  $\Delta$ : if  $\Delta$  is an empty usage mask, then  $\Delta$  splits into the left part  $\Delta$  and the right part  $\Delta$ .

**Proof.** By induction on the linear context  $\Delta$ . The case of the empty context is immediate; for a context extended by one cell, the claim follows from the induction hypothesis. The goal is simplified using the definition of the empty usage mask.

#### Lean 4 source `QLambda/Linear/Context.lean`

```
theorem OSplit.self_of_allNone {Delta : List (Option Ty)} (hn : AllNone Delta) :
  OSplit Delta Delta Delta := by
  induction Delta with
  | nil => exact .nil
  | cons cell Delta ih =>
    cases cell with
    | none =>
      simp only [AllNone] at hn
      exact .none (ih hn)
    | some A => simp [AllNone] at hn
```

#### 2.4.18 Reassociate a three-way split, moving the outside right part before the first inside part

**Statement.** Reassociate a three-way split, moving the outside right part before the first inside part. Formally:  
 $\exists \Delta_{km}, \text{OSplit } \Delta_{km} \Delta_k \Delta_m \wedge \text{OSplit } \Delta \Delta_{km} \Delta_n.$

**Proof.** By induction on the derivation that  $\Delta$  splits into the left part  $\Delta_{mn}$  and the right part  $\Delta_k$ . For the empty split, the claim is checked directly; for an absent cell shared by both parts, an occupied cell sent to the left part and an occupied cell sent to the right part, the claim follows from the induction hypothesis.

**Lean 4 source** [QLambda/Linear/Context.lean](#)

```
theorem OSplit.rotate {Delta Deltamn Deltak Deltam Deltan : List (Option Ty)}
  (h : OSplit Delta Deltamn Deltak) (hmn : OSplit Deltamn Deltam Deltan) :
  exists Deltakm, OSplit Deltakm Deltak Deltam /\ OSplit Delta Deltakm Deltan :=
  by
  induction h generalizing Deltam Deltan with
  | nil =>
    cases hmn
    exact <[], .nil, .nil>
  | none h ih =>
    cases hmn with
    | none hmn =>
      obtain <Deltakm, hkm, hout> := ih hmn
      exact <Option.none :: Deltakm, .none hkm, .none hout>
  | left h ih =>
    cases hmn with
    | left hmn =>
      obtain <Deltakm, hkm, hout> := ih hmn
      exact <some _ :: Deltakm, .right hkm, .left hout>
    | right hmn =>
      obtain <Deltakm, hkm, hout> := ih hmn
      exact <Option.none :: Deltakm, .none hkm, .right hout>
  | right h ih =>
    cases hmn with
    | none hmn =>
      obtain <Deltakm, hkm, hout> := ih hmn
      exact <some _ :: Deltakm, .left hkm, .left hout>
```

#### 2.4.19 Insert one element at a de Bruijn cutoff

**Definition.** Insert one element at a de Bruijn cutoff.

**Construction.** Generated by the rules `zero` and `succ`. Every element arises from finitely many applications of these rules, so properties are proved by induction over them.

**Lean 4 source** [QLambda/Linear/Context.lean](#)

```
inductive InsertAt {a : Type} (a : a) : Nat -> List a -> List a -> Prop where
| zero (xs : List a) : InsertAt a 0 xs (a :: xs)
| succ {n xs ys b} : InsertAt a n xs ys ->
  InsertAt a (n + 1) (b :: xs) (b :: ys)
```

### 2.4.20 Length of cell insertions

**Statement.** For a natural number  $n$ : if `InsertAt a n xs ys`, then the length of `ys` equals the sum of the length of `xs` and 1.

**Proof.** By induction on the derivation that `InsertAt a n xs ys`. The case of zero is immediate; for a successor, the claim follows from the induction hypothesis. The goal is simplified using the fact that addition for finitely supported sums is associative.

**Lean 4 source** `QLambda/Linear/Context.lean`

```
theorem InsertAt.length {a : Type} {a : a} {n : Nat} {xs ys : List a}
  (h : InsertAt a n xs ys) : ys.length = xs.length + 1 := by
  induction h with
  | zero => simp
  | succ _ ih => simp [ih, Nat.add_assoc]
```

### 2.4.21 The cell insertion is bounded by a length

**Statement.** For a natural number  $n$ : if `InsertAt a n xs ys`, then  $n \leq \text{xs.length}$ .

**Proof.** By induction on the derivation that `InsertAt a n xs ys`. For zero, the claim is checked directly; for a successor, the claim follows from the induction hypothesis. The goal is simplified using standard identities for natural numbers.

**Lean 4 source** `QLambda/Linear/Context.lean`

```
theorem InsertAt.le_length {a : Type} {a : a} {n : Nat} {xs ys : List a}
  (h : InsertAt a n xs ys) : n <= xs.length := by
  induction h with
  | zero => exact Nat.zero_le _
  | succ _ ih => simp using Nat.succ_le_succ ih
```

### 2.4.22 Cell insertion for context lookups

**Statement.** For natural numbers  $k, n$ : if `InsertAt b k xs ys` and position  $n$  of `xs` holds  $a$ , then position if  $n < k$  then  $n$  else  $n + 1$  of `ys` holds  $a$ .

**Proof.** By induction on the derivation that `InsertAt b k xs ys`. For zero, the claim is checked directly; for a successor, the claim follows from the induction hypothesis. The key step rewrites with standard identities for natural numbers and the definition of the zero.

**Lean 4 source** `QLambda/Linear/Context.lean`

```
theorem Lookup.insertAt {a : Type} {a b : a} {k n : Nat} {xs ys : List a}
  (hi : InsertAt b k xs ys) (hl : Lookup xs n a) :
  Lookup ys (if n < k then n else n + 1) a := by
  induction hi generalizing n with
  | zero =>
    simp
    exact Lookup.succ hl
  | @succ k xs ys b hi ih =>
    cases hl with
    | zero =>
```



```

      rw [ite_eq_left (Nat.zero_lt_succ k)]
      exact Lookup.zero
| @succ _ _ n _ h1 =>
  have h := ih h1
  simp only [Nat.succ_lt_succ_iff]
  by_cases hn : n < k
  * rw [ite_eq_left hn]
    rw [ite_eq_left hn] at h
    exact Lookup.succ h
  * rw [ite_eq_right hn]
    rw [ite_eq_right hn] at h
    exact Lookup.succ h

```

### 2.4.23 Insertion of an absent cell for empty usage masks

**Statement.** For linear contexts  $\Delta, \Delta'$ , a natural number  $k$ : if  $\text{InsertAt } \text{Option.none } k \ \Delta \ \Delta'$  and  $\Delta$  is an empty usage mask, then  $\Delta'$  is an empty usage mask.

**Proof.** By induction on the derivation that  $\text{InsertAt } \text{Option.none } k \ \Delta \ \Delta'$ . For zero, the claim is checked directly; for a successor, the claim follows from the induction hypothesis. The goal is simplified using the definition of the empty usage mask.

#### Lean 4 source `QLambda/Linear/Context.lean`

```

theorem AllNone.insertNone {Delta Delta' : List (Option Ty)} {k : Nat}
  (hi : InsertAt (Option.none : Option Ty) k Delta Delta') (h : AllNone Delta) :
  AllNone Delta' := by
  induction hi with
  | zero => simp [AllNone]
  | succ hi ih =>
    cases ?Option Ty? with
    | none =>
      simp only [AllNone] at h |-
      exact ih h
    | some A => simp [AllNone] at h

```

### 2.4.24 Insertion of an absent cell for single-cell usage masks

**Statement.** For linear contexts  $\Delta, \Delta'$ , natural numbers  $k, n$ : if  $\text{InsertAt } \text{Option.none } k \ \Delta \ \Delta'$  and  $\Delta$  is occupied exactly at position  $n$ , then  $\Delta'$  is occupied exactly at position  $n$  if  $n < k$  then  $n$  else  $n + 1$ .

**Proof.** By induction on the derivation that  $\text{InsertAt } \text{Option.none } k \ \Delta \ \Delta'$ . For zero, the claim is checked directly; for a successor, the claim follows from the induction hypothesis. The key step rewrites with standard identities for natural numbers and the definition of the single-cell usage mask.

#### Lean 4 source `QLambda/Linear/Context.lean`

```

theorem OnlySomeAt.insertNone {Delta Delta' : List (Option Ty)} {k n : Nat}
  (hi : InsertAt (Option.none : Option Ty) k Delta Delta') (ho : OnlySomeAt Delta n)
  :
  OnlySomeAt Delta' (if n < k then n else n + 1) := by
  induction hi generalizing n with

```

```

| zero =>
  simp only [Nat.not_lt_zero, ite_false]
  simp [OnlySomeAt] using ho
| @succ k Delta Delta' cell hi ih =>
  cases n with
  | zero =>
    rw [ite_eq_left (Nat.zero_lt_succ k)]
    cases cell with
    | none => simp [OnlySomeAt] at ho
    | some A =>
      change AllNone Delta'
      exact AllNone.insertNone hi ho
  | succ n =>
    cases cell with
    | some A => simp [OnlySomeAt] at ho
    | none =>
      simp only [OnlySomeAt] at ho
      have h := ih ho
      simp only [Nat.succ_lt_succ_iff]
      by_cases hn : n < k
      * rw [ite_eq_left hn]
      rw [ite_eq_left hn] at h
      exact h
      * rw [ite_eq_right hn]
      rw [ite_eq_right hn] at h
      exact h

```

#### 2.4.25 Inserting an unused cell into a split inserts it in both children

**Statement.** Inserting an unused cell into a split inserts it in both children. Formally:  $\exists \Delta_1' \Delta_2', \text{InsertAt Option.none } k \Delta_1 \Delta_1' \wedge \text{InsertAt Option.none } k \Delta_2 \Delta_2' \wedge \text{OSplit } \Delta' \Delta_1' \Delta_2'$ .

**Proof.** By induction on the derivation that  $\text{InsertAt Option.none } k \Delta \Delta'$ . For zero, the claim is checked directly; for a successor, the claim follows from the induction hypothesis.

#### Lean 4 source `QLambda/Linear/Context.lean`

```

theorem OSplit.insertNone {Delta Delta_1 Delta_2 Delta' : List (Option Ty)} {k : Nat}
  (hs : OSplit Delta Delta_1 Delta_2)
  (hi : InsertAt (Option.none : Option Ty) k Delta Delta') :
  exists Delta_1' Delta_2',
    InsertAt (Option.none : Option Ty) k Delta_1 Delta_1' /\
    InsertAt (Option.none : Option Ty) k Delta_2 Delta_2' /\
    OSplit Delta' Delta_1' Delta_2' := by
  induction hi generalizing Delta_1 Delta_2 with
  | zero =>
    exact <Option.none :: Delta_1, Option.none :: Delta_2, .zero _, .zero _, .none
    hs>
  | @succ k Delta Delta' cell hi ih =>
    cases hs with
    | none hs =>
      obtain <Delta_1', Delta_2', h_1, h_2, hs'> := ih hs
      exact <Option.none :: Delta_1', Option.none :: Delta_2',
        .succ h_1, .succ h_2, .none hs'>

```

```

| left hs =>
  obtain <Delta_1', Delta_2', h_1, h_2, hs'> := ih hs
  exact <some _ :: Delta_1', Option.none :: Delta_2',
    .succ h_1, .succ h_2, .left hs'>
| right hs =>
  obtain <Delta_1', Delta_2', h_1, h_2, hs'> := ih hs
  exact <Option.none :: Delta_1', some _ :: Delta_2',
    .succ h_1, .succ h_2, .right hs'>

```

## 2.4.26 Mark index $n$ and leave every other in-scope variable unused

**Definition.** Mark index  $n$  and leave every other in-scope variable unused.

**Construction.** Defined by cases on the input:  $\_, [] \mapsto []$ ;  $0, \_ :: xs \mapsto \text{true} :: \text{List.replicate } xs.\text{length } \text{false}$ ;  $n + 1, \_ :: xs \mapsto \text{false} :: \text{mark } n \text{ } xs$ .

**Lean 4 source** [QLambda/Linear/Context.lean](#)

```

def mark : Nat -> List Ty -> List Bool
| _, [] => []
| 0, _ :: xs => true :: List.replicate xs.length false
| n + 1, _ :: xs => false :: mark n xs

```

## 2.4.27 Combine two disjoint usage vectors

**Definition.** Combine two disjoint usage vectors. Fails if any index is used twice.

**Construction.** Defined by cases on the input:  $[], [] \mapsto$  the present value  $[]$ ;  $\text{false} :: as, \text{false} :: bs \mapsto \text{match zipOr } as \text{ } bs \text{ with; some } cs \mapsto \text{the present value the false of } :: \text{and } cs; \text{none} \mapsto \text{none}$ ;  $\text{false} :: as, \text{true} :: bs \mapsto \text{match zipOr } as \text{ } bs \text{ with; some } cs \mapsto \text{the present value the true of } :: \text{and } cs; \text{none} \mapsto \text{none}$ ;  $\text{true} :: as, \text{false} :: bs \mapsto \text{match zipOr } as \text{ } bs \text{ with; and so on for the remaining cases}$ .

**Lean 4 source** [QLambda/Linear/Context.lean](#)

```

def zipOr : List Bool -> List Bool -> Option (List Bool)
| [], [] => some []
| false :: as, false :: bs =>
  match zipOr as bs with
  | some cs => some (false :: cs)
  | none => none
| false :: as, true :: bs =>
  match zipOr as bs with
  | some cs => some (true :: cs)
  | none => none
| true :: as, false :: bs =>
  match zipOr as bs with
  | some cs => some (true :: cs)
  | none => none
| true :: _, true :: _ => none
| _, _ => none

```

### 2.4.28 Turn a scope and a usage vector into the linear context of a judgment

**Definition.** Turn a scope and a usage vector into the linear context of a judgment.

**Construction.** Defined by cases on the input:  $A :: As, \text{true} :: bs \mapsto \text{some } A :: \text{usageCtx } As \text{ } bs; \_ :: As, \text{false} :: bs \mapsto \text{none} :: \text{usageCtx } As \text{ } bs; \_, \_ \mapsto []$ .

**Lean 4 source** [QLambda/Linear/Context.lean](#)

```
def usageCtx : List Ty -> List Bool -> List (Option Ty)
| A :: As, true :: bs => some A :: usageCtx As bs
| _ :: As, false :: bs => none :: usageCtx As bs
| _, _ => []
```

### 2.4.29 No linear index is marked

**Definition.** No linear index is marked.

**Construction.** Defined by cases on the input:  $[] \mapsto \text{true}; \text{false} :: xs \mapsto \text{the all-false mask of } xs; \text{true} :: \_ \mapsto \text{false}$ .

**Lean 4 source** [QLambda/Linear/Context.lean](#)

```
def allFalse : List Bool -> Bool
| [] => true
| false :: xs => allFalse xs
| true :: _ => false
```

### 2.4.30 Context lookup, assuming successful lookup

**Statement.** For a natural number  $n$ : if  $xs[n]? = \text{some } a$ , then position  $n$  of  $xs$  holds  $a$ .

**Proof.** By induction on  $xs$ . The case of the empty context cannot occur, since it contradicts the hypothesis that  $xs[n]? = \text{some } a$ ; for a context extended by one cell, the claim follows from the induction hypothesis. The goal is simplified using the definition of the zero.

**Lean 4 source** [QLambda/Linear/Context.lean](#)

```
theorem lookup_of_get? {a : Type} {xs : List a} {n : Nat} {a : a}
(h : xs[n]? = some a) : Lookup xs n a := by
  induction xs generalizing n with
  | nil => simp at h
  | cons x xs ih =>
    cases n with
    | zero =>
      simp at h
      subst h
      exact Lookup.zero
    | succ n =>
      simp at h
      exact Lookup.succ (ih h)
```

### 2.4.31 Empty usage mask of the unused context

**Statement.** For an unrestricted context  $\Delta$ : `usageCtx  $\Delta$  (List.replicate  $\Delta$ .length false)` is an empty usage mask.

**Proof.** By induction on the unrestricted context  $\Delta$ . For the empty context, the claim is checked directly; for a context extended by one cell, the claim follows from the induction hypothesis. The goal is simplified using the definition of the usage context, the definition of the empty usage mask and the recursion equation for constant lists.

#### Lean 4 source `QLambda/Linear/Context.lean`

```
theorem allNone_unused (Delta : List Ty) :
  AllNone (usageCtx Delta (List.replicate Delta.length false)) := by
  induction Delta with
  | nil => simp [usageCtx, AllNone]
  | cons A Delta ih =>
    simp [List.replicate_succ, usageCtx, AllNone, ih]
```

### 2.4.32 Length of the single-use mark

**Statement.** For a natural number  $n$ , an unrestricted context  $\Delta$ : `(mark n  $\Delta$ ).length` equals the length of  $\Delta$ .

**Proof.** By induction on the unrestricted context  $\Delta$ . For the empty context, the claim is checked directly; for a context extended by one cell, the claim follows from the induction hypothesis. The goal is simplified using the definition of the single-use mark and standard identities for lists.

#### Lean 4 source `QLambda/Linear/Context.lean`

```
theorem mark_length (n : Nat) (Delta : List Ty) : (mark n Delta).length = Delta.length
:= by
  induction Delta generalizing n with
  | nil => simp [mark]
  | cons A Delta ih =>
    cases n with
    | zero => simp [mark, List.length_replicate]
    | succ n => simp [mark, ih]
```

### 2.4.33 Linear variable of the usage mask

**Statement.** For a natural number  $n$ , an unrestricted context  $\Delta$ , a type  $A$ : if  $\Delta[n]? = \text{some } A$ , then position  $n$  of `usageCtx  $\Delta$  (mark n  $\Delta$ )` holds some  $A$  and `usageCtx  $\Delta$  (mark n  $\Delta$ )` is occupied exactly at position  $n$ .

**Proof.** By induction on the natural number  $n$ . For zero, the claim is checked directly; for a successor, the claim follows from the induction hypothesis.

#### Lean 4 source `QLambda/Linear/Context.lean`

```
theorem varLin_usage {n : Nat} {Delta : List Ty} {A : Ty} (h : Delta[n]? = some A) :
  Lookup (usageCtx Delta (mark n Delta)) n (some A) /\
  OnlySomeAt (usageCtx Delta (mark n Delta)) n := by
  induction n generalizing Delta with
```

```

| zero =>
  cases Delta with
  | nil => simp at h
  | cons B Delta =>
    simp at h
    subst h
    exact <Lookup.zero, allNone_unused Delta>
| succ n ih =>
  cases Delta with
  | nil => simp at h
  | cons B Delta =>
    simp at h
    obtain <hlook, honly> := ih h
    exact <Lookup.succ hlook, honly>

```

#### 2.4.34 Equality with constant list of false, assuming all-false mask

**Statement.** If `allFalse u` evaluates to true, then `u` equals the constant list of the length of `u` and false.

**Proof.** By induction on `u`. The case of the empty context is immediate; for a context extended by one cell, the claim follows from the induction hypothesis. The key step rewrites with the definition of the all-false mask, standard identities for lists and the recursion equation for constant lists.

##### Lean 4 source `QLambda/Linear/Context.lean`

```

theorem eq_replicate_false_of_allFalse {u : List Bool} (h : allFalse u = true) :
  u = List.replicate u.length false := by
  induction u with
  | nil => rfl
  | cons a u ih =>
    cases a with
    | true => simp [allFalse] at h
    | false =>
      simp [allFalse] at h
      rw [ih h]
      simp [List.length_cons, List.replicate_succ]

```

#### 2.4.35 Empty usage mask, assuming all-false mask

**Statement.** For an unrestricted context  $\Delta$ : if `u.length =  $\Delta$ .length` and `allFalse u` evaluates to true, then `usageCtx  $\Delta$  u` is an empty usage mask.

**Proof.** The key step rewrites with the hypothesis that `u.length =  $\Delta$ .length`, the equality with constant list of false, assuming all-false mask and the empty usage mask of the unused context.

##### Lean 4 source `QLambda/Linear/Context.lean`

```

theorem allNone_of_allFalse {Delta : List Ty} {u : List Bool}
  (hlen : u.length = Delta.length) (h : allFalse u = true) :
  AllNone (usageCtx Delta u) := by
  have hu : u = List.replicate Delta.length false := by
    rw [← hlen]
  exact eq_replicate_false_of_allFalse h
  rw [hu]

```

exact allNone\_unused Delta

### 2.4.36 Length of the pointwise merge of two usage masks

**Statement.** If  $\text{zipOr } u1 \ u2 = \text{some } u$ , then the length of  $u$  equals the length of the length of  $u2$ .

**Proof.** By induction on  $u1$ . For the empty context, the claim is checked directly; for a context extended by one cell, the claim follows from the induction hypothesis. The goal is simplified using the definition of the pointwise merge of two usage masks.

#### Lean 4 source `QLambda/Linear/Context.lean`

```
theorem zipOr_length {u1 u2 u : List Bool} (h : zipOr u1 u2 = some u) :
  u.length = u1.length /\ u.length = u2.length := by
  induction u1 generalizing u2 u with
  | nil =>
    cases u2 with
    | nil =>
      simp [zipOr] at h
      subst h
      simp
    | cons _ _ => simp [zipOr] at h
  | cons a u1 ih =>
    cases u2 with
    | nil => simp [zipOr] at h
    | cons b u2 =>
      cases a <|> cases b <|> simp only [zipOr] at h
      * cases htail : zipOr u1 u2 with
        | none => simp [htail] at h
        | some u' =>
          simp [htail] at h
          subst h
          obtain <h1, h2> := ih htail
          exact <by simp [h1], by simp [h2]>
      * cases htail : zipOr u1 u2 with
        | none => simp [htail] at h
        | some u' =>
          simp [htail] at h
          subst h
          obtain <h1, h2> := ih htail
          exact <by simp [h1], by simp [h2]>
      * cases htail : zipOr u1 u2 with
        | none => simp [htail] at h
        | some u' =>
          simp [htail] at h
          subst h
          obtain <h1, h2> := ih htail
          exact <by simp [h1], by simp [h2]>
      * simp at h
```

### 2.4.37 Ordered context split, assuming pointwise merge of two usage masks

**Statement.** For an unrestricted context  $\Delta$ : if  $\text{zipOr } u1 \ u2 = \text{some } u$ ;  $u1.\text{length} = \Delta.\text{length}$ ; and  $u2.\text{length} = \Delta.\text{length}$ , then  $\text{usageCtx } \Delta \ u$  splits into the left part  $\text{usageCtx } \Delta \ u1$  and the right part  $\text{usageCtx } \Delta \ u2$ .

**Proof.** By induction on the unrestricted context  $\Delta$ . For the empty context, the claim is checked directly; for a context extended by one cell, the claim follows from the induction hypothesis. The goal is simplified using the definition of the pointwise merge of two usage masks, standard identities for lists and the empty list for all-fragment unrestricted contexts.

#### Lean 4 source `QLambda/Linear/Context.lean`

```
theorem oSplit_of_zipOr {Delta : List Ty} {u1 u2 u : List Bool}
  (hzip : zipOr u1 u2 = some u) (h1 : u1.length = Delta.length)
  (h2 : u2.length = Delta.length) :
  OSplit (usageCtx Delta u) (usageCtx Delta u1) (usageCtx Delta u2) := by
  induction Delta generalizing u1 u2 u with
  | nil =>
    cases u1 with
    | nil =>
      cases u2 with
      | nil =>
        simp [zipOr] at hzip
        subst hzip
        exact OSplit.nil
      | cons _ _ => simp at h2
    | cons _ _ => simp at h1
  | cons A Delta ih =>
    cases u1 with
    | nil => simp at h1
    | cons a u1 =>
      cases u2 with
      | nil => simp at h2
      | cons b u2 =>
        simp [List.length_cons] at h1 h2
        cases a <|> cases b <|> simp only [zipOr] at hzip
        * cases htail : zipOr u1 u2 with
          | none => simp [htail] at hzip
          | some u' =>
            simp [htail] at hzip
            subst hzip
            exact OSplit.none (ih htail h1 h2)
        * cases htail : zipOr u1 u2 with
          | none => simp [htail] at hzip
          | some u' =>
            simp [htail] at hzip
            subst hzip
            exact OSplit.right (ih htail h1 h2)
        * cases htail : zipOr u1 u2 with
          | none => simp [htail] at hzip
          | some u' =>
            simp [htail] at hzip
            subst hzip
            exact OSplit.left (ih htail h1 h2)
        * simp at hzip
```



#### 2.4.38 Definition of the identity on a qubit

**Definition.**  $\lambda^1(q : \text{Qubit}). q.$

**Construction.** Defined to be the lambda abstraction of a linear, a qubit, the variable of a linear at 0.

**Lean 4 source** [QLambda/Linear/Examples.lean](#)

```
def idQ : Term :=  
  .lam .lin .qubit (.var .lin 0)
```

#### 2.4.39 Definition of the identity quantum type

**Definition.** The identity quantum type is a type.

**Construction.** Defined to be the function type of a linear, a qubit, a qubit.

**Lean 4 source** [QLambda/Linear/Examples.lean](#)

```
def idQTy : Ty :=  
  .arrow .lin .qubit .qubit
```

#### 2.4.40 Identity at the gate type, used for a closed $\beta$ -reduction regression

**Definition.** Identity at the gate type, used for a closed  $\beta$ -reduction regression.

**Construction.** Defined to be the lambda abstraction of a linear, the function type of a linear, a qubit, a qubit, the variable of a linear at 0.

**Lean 4 source** [QLambda/Linear/Examples.lean](#)

```
def idGate : Term :=  
  .lam .lin (.arrow .lin .qubit .qubit) (.var .lin 0)
```

#### 2.4.41 Definition of the identity gate type

**Definition.** The identity gate type is a type.

**Construction.** Defined to be the function type of a linear, the function type of a linear, a qubit, a qubit, the function type of a linear, a qubit, a qubit.

**Lean 4 source** [QLambda/Linear/Examples.lean](#)

```
def idGateTy : Ty :=  
  .arrow .lin (.arrow .lin .qubit .qubit) (.arrow .lin .qubit .qubit)
```

#### 2.4.42 Definition of the Bell-state program

**Definition.**  $\lambda^1(a : \text{Qubit}). \lambda^1(b : \text{Qubit}). \text{CX } (H \ a) \ b$ , with the pair repackaged.

**Construction.** Defined by an explicit formula.

**Lean 4 source** [QLambda/Linear/Examples.lean](#)

```

def bell : Term :=
  .lam .lin .qubit <|
    .lam .lin .qubit <|
      .unpair
        (.app (.app (.prim .cx) (.app (.prim .h) (.var .lin 1))) (.var .lin 0))
        (.lam .lin .qubit <|
          .lam .lin .qubit <|
            .pair (.var .lin 1) (.var .lin 0))

```

### 2.4.43 Definition of the Bell-state program type

**Definition.** The Bell-state program type is a type.

**Construction.** Defined to be the function type of a linear, a qubit, the function type of a linear, a qubit, .tensor .qubit .qubit.

**Lean 4 source** [QLambda/Linear/Examples.lean](#)

```

def bellTy : Ty :=
  .arrow .lin .qubit (.arrow .lin .qubit (.tensor .qubit .qubit))

```

### 2.4.44 Measure, then apply X when the classical bit is true

**Definition.** Measure, then apply X when the classical bit is true.

**Construction.** Defined by an explicit formula.

**Lean 4 source** [QLambda/Linear/Examples.lean](#)

```

def measureX : Term :=
  .lam .lin .qubit <|
    .measure (.var .lin 0) <|
      .lam .unres .bit <|
        .lam .lin .qubit <|
          .ite (.var .unres 0)
            (.app (.prim .x) (.var .lin 0))
            (.var .lin 0)

```

### 2.4.45 Type inference for the identity on a qubit

**Statement.** The type inference of [], [], idQ equals the present value idQTy, [].

**Proof.** By definition. Unfolding the type inference turns the left-hand side, the type inference of [], [], idQ, into the right-hand side, the present value idQTy, []; the two sides are the same term.

**Lean 4 source** [QLambda/Linear/Examples.lean](#)

```

theorem idQ_infer : infer [] [] idQ = some (idQTy, []) := by
  rfl

```

#### 2.4.46 Type inference for the identity gate

**Statement.** The type inference of `[], []`, the identity gate equals the present value `idGateTy, []`.

**Proof.** By definition. Unfolding the type inference turns the left-hand side, the type inference of `[], []`, the identity gate, into the right-hand side, the present value `idGateTy, []`; the two sides are the same term.

**Lean 4 source** `QLambda/Linear/Examples.lean`

```
theorem idGate_infer : infer [] [] idGate = some (idGateTy, []) := by
  rfl
```

#### 2.4.47 Type inference for the Bell-state program

**Statement.** The type inference of `[], []`, `bell` equals the present value `bellTy, []`.

**Proof.** By definition. Unfolding the type inference turns the left-hand side, the type inference of `[], []`, `bell`, into the right-hand side, the present value `bellTy, []`; the two sides are the same term.

**Lean 4 source** `QLambda/Linear/Examples.lean`

```
theorem bell_infer : infer [] [] bell = some (bellTy, []) := by
  rfl
```

#### 2.4.48 Type inference for the X-basis measurement

**Statement.** The type inference of `[], []`, the X-basis measurement equals the present value `idQTy, []`.

**Proof.** By definition. Unfolding the type inference turns the left-hand side, the type inference of `[], []`, the X-basis measurement, into the right-hand side, the present value `idQTy, []`; the two sides are the same term.

**Lean 4 source** `QLambda/Linear/Examples.lean`

```
theorem measureX_infer : infer [] [] measureX = some (idQTy, []) := by
  rfl
```

#### 2.4.49 The identity on a qubit is well typed

**Statement.** `idQ` has type `idQTy` under the unrestricted context `[]` and the linear context `[]`.

**Proof.** The proof term combines the facts named in it directly.

**Lean 4 source** `QLambda/Linear/Examples.lean`

```
theorem idQ_typed : HasType [] [] idQ idQTy :=
  (infer_sound idQ_infer).1
```

#### 2.4.50 The Bell-state program is well typed

**Statement.** `bell` has type `bellTy` under the unrestricted context `[]` and the linear context `[]`.

**Proof.** The proof term combines the facts named in it directly.

**Lean 4 source** `QLambda/Linear/Examples.lean`

```
theorem bell_typed : HasType [] [] bell bellTy :=
  (infer_sound bell_infer).1
```

#### 2.4.51 The X-basis measurement is well typed

**Statement.** `measureX` has type `idQTy` under the unrestricted context `[]` and the linear context `[]`.

**Proof.** The proof term combines the facts named in it directly.

**Lean 4 source** `QLambda/Linear/Examples.lean`

```
theorem measureX_typed : HasType [] [] measureX idQTy :=
  (infer_sound measureX_infer).1
```

#### 2.4.52 An unrestricted qubit binder would permit cloning and is rejected

**Definition.** An unrestricted qubit binder would permit cloning and is rejected.

**Construction.** Defined to be `.lam .unres .qubit <| .pair (.var .unres 0) (.var .unres 0)`.

**Lean 4 source** `QLambda/Linear/Examples.lean`

```
def rejectedClone : Term :=
  .lam .unres .qubit <|
    .pair (.var .unres 0) (.var .unres 0)
```

#### 2.4.53 Type inference for the rejected clone

**Statement.** The type inference of `[]`, `[]`, the rejected clone equals `none`.

**Proof.** By definition. Unfolding the type inference turns the left-hand side, the type inference of `[]`, `[]`, the rejected clone, into the right-hand side, `none`; the two sides are the same term.

**Lean 4 source** `QLambda/Linear/Examples.lean`

```
theorem rejectedClone_infer : infer [] [] rejectedClone = none := by
  rfl
```

#### 2.4.54 An unrestricted closure may not capture a linear qubit

**Definition.** An unrestricted closure may not capture a linear qubit.

**Construction.** Defined to be `.lam .lin .qubit <| .lam .unres .bit (.var .lin 0)`.

### Lean 4 source `QLambda/Linear/Examples.lean`

```
def rejectedCapture : Term :=  
  .lam .lin .qubit <|  
    .lam .unres .bit (.var .lin 0)
```

#### 2.4.55 Type inference for the rejected capture

**Statement.** The type inference of `[]`, `[]`, the rejected capture equals `none`.

**Proof.** By definition. Unfolding the type inference turns the left-hand side, the type inference of `[]`, `[]`, the rejected capture, into the right-hand side, `none`; the two sides are the same term.

### Lean 4 source `QLambda/Linear/Examples.lean`

```
theorem rejectedCapture_infer : infer [] [] rejectedCapture = none := by  
  rfl
```

#### 2.4.56 Definition of the recursive identity type

**Definition.** The degenerate recursive type  $\mu\alpha.$   $\alpha$  is scoped and strictly positive.

**Construction.** Defined to be the recursive type of the variable at 0.

### Lean 4 source `QLambda/Linear/Examples.lean`

```
def recursiveIdTy : Ty :=  
  .mu (.var 0)
```

#### 2.4.57 Admissibility of the recursive identity type

**Statement.** `recursiveIdTy` is admissible. Formally: `Ty.Admissible recursiveIdTy`.

**Proof.** The claim is a finite computation and is checked by evaluating it.

### Lean 4 source `QLambda/Linear/Examples.lean`

```
theorem recursiveIdTy_admissible : Ty.Admissible recursiveIdTy := by  
  decide
```

#### 2.4.58 Folding after unfolding at an admissible recursive type is accepted

**Definition.** Folding after unfolding at an admissible recursive type is accepted.

**Construction.** Defined to be `.lam .lin recursiveIdTy <| .fold (.var 0) (.unfold (.var .lin 0))`.

### Lean 4 source `QLambda/Linear/Examples.lean`

```
def recursiveFoldUnfold : Term :=  
  .lam .lin recursiveIdTy <|  
    .fold (.var 0) (.unfold (.var .lin 0))
```

### 2.4.59 Type inference for the fold/unfold of a recursive type

**Statement.** The type inference of `[], []`, the fold/unfold of a recursive type equals the present value `.arrow .lin recursiveIdTy recursiveIdTy, []`.

**Proof.** By definition. Unfolding the type inference turns the left-hand side, the type inference of `[], []`, the fold/unfold of a recursive type, into the right-hand side, the present value `.arrow .lin recursiveIdTy recursiveIdTy, []`; the two sides are the same term.

**Lean 4 source** `QLambda/Linear/Examples.lean`

```
theorem recursiveFoldUnfold_infer :  
  infer [] [] recursiveFoldUnfold =  
    some (.arrow .lin recursiveIdTy recursiveIdTy, []) := by  
  rfl
```

### 2.4.60 The fold/unfold of a recursive type is well typed

**Statement.** `recursiveFoldUnfold` has type `.arrow .lin recursiveIdTy recursiveIdTy` under the unrestricted context `[]` and the linear context `[]`.

**Proof.** The proof term combines the facts named in it directly.

**Lean 4 source** `QLambda/Linear/Examples.lean`

```
theorem recursiveFoldUnfold_typed :  
  HasType [] [] recursiveFoldUnfold  
    (.arrow .lin recursiveIdTy recursiveIdTy) :=  
  (infer_sound recursiveFoldUnfold_infer).1
```

### 2.4.61 A recursive occurrence in a function domain is not strictly positive

**Definition.** A recursive occurrence in a function domain is not strictly positive.

**Construction.** Defined to be the recursive type of the function type of a linear, `.var 0`, a unit.

**Lean 4 source** `QLambda/Linear/Examples.lean`

```
def negativeRecursiveTy : Ty :=  
  .mu (.arrow .lin (.var 0) .unit)
```

### 2.4.62 The negative recursive type is rejected

**Statement.** The admissibility of the negative recursive type equals `false`.

**Proof.** By definition. Unfolding the admissibility turns the left-hand side, the admissibility of the negative recursive type, into the right-hand side, `false`; the two sides are the same term.

**Lean 4 source** `QLambda/Linear/Examples.lean`

```
theorem negativeRecursiveTy_rejected :  
  Ty.admissible negativeRecursiveTy = false := by  
  rfl
```

### 2.4.63 $\Psi$ map of a tensor product of the identity at the copy

**Statement.** Evaluate  $((\text{copyodephase}) \otimes \text{id}).\text{choi at } (a, 3i) / (b, 3j)$ .

**Proof.** The key step rewrites with the definition of the triple copy Choi, the Choi matrix of a tensor product for completely positive maps, the definition of the Choi tensor product equivalence and the identity of the Choi matrix of a pair. The remaining numerical facts are checked by direct computation.

**Lean 4 source** `QLambda/Linear/FragmentClassicalBitCoassoc/Psi_tensor_id_at_copy.lean`

```
theorem Psi_tensor_id_at_copy
  (a b : Fin 8) (i j : Fin 2) :
  (CMap.tensor
    (bitCopySuperoperator.cp.comp bitDephaseSuperoperator.cp)
    (CMap.identity 2)).choi
    (a, copyIdx i) (b, copyIdx j) =
    tripleCopyChoi a b i j := by
  dsimp only [tripleCopyChoi]
  simp only [CMap.choi_tensor, reindex_apply, submatrix_apply, kroneckerMap_apply]
  simp only [CMap.choiTensorEquiv]
  simp_rw [identity_choi_pair, bitCopy_comp_dephase_raw_choi_pair]
  simp only [finProdFinEquiv, Fin.divNat, Fin.modNat, copyIdx]
  fin_cases i <|> fin_cases j <|> fin_cases a <|> fin_cases b <|> norm_num
```

### 2.4.64 Left coassociativity composite, including the Day/tensor associator

**Definition.** Left coassociativity composite, including the Day/tensor associator.

**Construction.** Defined to be the composite of the tensor associator at 2, 2, 2 after the bit coassociativity left pre-composite.

**Lean 4 source** `QLambda/Linear/FragmentClassicalBitCoassoc/bitCoassocLeft.lean`

```
noncomputable def bitCoassocLeft : Superoperator 2 8 :=
  Superoperator.comp (Superoperator.tensorAssociator 2 2 2)
    bitCoassocLeftPre
```

### 2.4.65 Left parenthesization of classical copy-after-dephase, before reassociation

**Definition.** Left parenthesization of classical copy-after-dephase, before reassociation.

**Construction.** Defined by an explicit formula built from the composition, the tensor product, the bit copy superoperator and the bit dephase superoperator.

**Lean 4 source** `QLambda/Linear/FragmentClassicalBitCoassoc/bitCoassocLeftPre.lean`

```
noncomputable def bitCoassocLeftPre : Superoperator 2 8 :=
  Superoperator.comp
    (Superoperator.tensor
      (Superoperator.comp bitCopySuperoperator bitDephaseSuperoperator)
      (Superoperator.identity 2))
    bitCopySuperoperator
```

#### 2.4.66 Closed Choi form of the left coassociativity composite (sans identity associator)

**Statement.** Closed Choi form of the left coassociativity composite (sans identity associator). Formally:  $\text{bitCoassocLeftPre.cp.choi } (a, i) (b, j) = \text{if } i = j \wedge a.\text{val} = i.\text{val} * 7 \wedge b.\text{val} = j.\text{val} * 7 \text{ then } 1 \text{ else } 0.$

**Proof.** The key step rewrites with the after expanding  $(\Psi \otimes \text{id}) \circ \text{copy}$  and substituting the copy Choi and the  $\psi$  map of a tensor product of the identity at the copy.

**Lean 4 source** [QLambda/Linear/FragmentClassicalBitCoassoc/bitCoassocLeftPre\\_choi.lean](#)

```
theorem bitCoassocLeftPre_choi
  (a b : Fin 8) (i j : Fin 2) :
  bitCoassocLeftPre.cp.choi (a, i) (b, j) =
    if i = j /\ a.val = i.val * 7 /\ b.val = j.val * 7 then (1 : ?) else 0 := by
  rw [bitCoassocLeftPre_choi_collapsed, Psi_tensor_id_at_copy]
  rfl
```

#### 2.4.67 After expanding $(\Psi \otimes \text{id}) \circ \text{copy}$ and substituting the copy Choi

**Statement.** After expanding  $(\Psi \otimes \text{id}) \circ \text{copy}$  and substituting the copy Choi, the composition sum collapses to one tensor entry at  $\text{copyIdx}$ .

**Proof.** The key step rewrites with the definition of the bit coassociativity left pre-composite, the underlying completely positive map of a composite for superoperators, the coordinate formula for intrinsic Choi composition and the underlying completely positive map of a tensor product for superoperators.

**Lean 4 source** [QLambda/Linear/FragmentClassicalBitCoassoc/bitCoassocLeftPre\\_choi\\_collapsed.lean](#)

```
theorem bitCoassocLeftPre_choi_collapsed
  (a b : Fin 8) (i j : Fin 2) :
  bitCoassocLeftPre.cp.choi (a, i) (b, j) =
    (CMap.tensor
      (bitCopySuperoperator.cp.comp bitDephaseSuperoperator.cp)
      (CMap.identity 2)).choi
      (a, copyIdx i) (b, copyIdx j) := by
  simp only [bitCoassocLeftPre, Superoperator.cp_comp, CMap.choi_comp_apply,
    Superoperator.cp_tensor, Superoperator.identity]
  simp_rw [bitCopy_choi_pair]
  exact sum_bitCopy_selector _ i j
```

#### 2.4.68 The bit coassociativity left equals a pre-composite

**Statement.** The bit coassociativity left equals the bit coassociativity left pre-composite. Formally:  $\text{bitCoassocLeft} = \text{bitCoassocLeftPre}.$

**Proof.** The goal is simplified using the definition of the bit coassociativity left, the tensor associator of the two of the two of the two and the identity of a composite for superoperators.

**Lean 4 source** [QLambda/Linear/FragmentClassicalBitCoassoc/bitCoassocLeft\\_eq\\_pre.lean](#)



```

theorem bitCoassocLeft_eq_pre :
  bitCoassocLeft = bitCoassocLeftPre := by
  simp only [bitCoassocLeft, tensorAssociator_two_two_two,
    Superoperator.identity_comp]

```

#### 2.4.69 Classical copy-after-dephase is coassociative

**Statement.** Classical copy-after-dephase is coassociative. Formally:  $\text{bitCoassocLeft} = \text{bitCoassocRight}$ .

**Proof.** By case analysis on  $\text{ai}$ . The key step rewrites with the fact that the bit coassociativity left equals a pre-composite, the closed Choi form of the left coassociativity composite (sans identity associator), the closed Choi form of the right coassociativity composite and the extensionality for superoperators.

**Lean 4 source** [QLambda/Linear/FragmentClassicalBitCoassoc/bitCoassocLeft\\_eq\\_right.lean](#)

```

theorem bitCoassocLeft_eq_right :
  bitCoassocLeft = bitCoassocRight := by
  rw [bitCoassocLeft_eq_pre]
  apply Superoperator.ext
  apply CPMMap.ext
  ext ai bj
  rcases ai with <a, i>
  rcases bj with <b, j>
  rw [bitCoassocLeftPre_choi, bitCoassocRight_choi]

```

#### 2.4.70 Right coassociativity composite

**Definition.** Right coassociativity composite.

**Construction.** Defined by an explicit formula built from the composition, the tensor product, the identity and the bit copy superoperator.

**Lean 4 source** [QLambda/Linear/FragmentClassicalBitCoassoc/bitCoassocRight.lean](#)

```

noncomputable def bitCoassocRight : Superoperator 2 8 :=
  Superoperator.comp
    (Superoperator.tensor
      (Superoperator.identity 2)
      (Superoperator.comp bitCopySuperoperator bitDephaseSuperoperator))
    bitCopySuperoperator

```

#### 2.4.71 Closed Choi form of the right coassociativity composite

**Statement.** Closed Choi form of the right coassociativity composite. Formally:  $\text{bitCoassocRight.cp.choi } (a, i) (b, j) = \text{if } i = j \wedge a.\text{val} = i.\text{val} * 7 \wedge b.\text{val} = j.\text{val} * 7 \text{ then } 1 \text{ else } 0$ .

**Proof.** The key step rewrites with the after expanding  $(\text{id} \otimes \Psi) \circ \text{copy}$  and substituting the copy Choi and the identity of a tensor product of the  $\Psi$  map at the copy.

#### Lean 4 source `QLambda/Linear/FragmentClassicalBitCoassoc/bitCoassocRight_choi.lean`

```
theorem bitCoassocRight_choi
  (a b : Fin 8) (i j : Fin 2) :
  bitCoassocRight.cp.choi (a, i) (b, j) =
    if i = j /\ a.val = i.val * 7 /\ b.val = j.val * 7 then (1 : ?) else 0 := by
  rw [bitCoassocRight_choi_collapsed, id_tensor_Psi_at_copy]
  rfl
```

#### 2.4.72 After expanding $(\text{id} \otimes \Psi) \circ \text{copy}$ and substituting the copy Choi

**Statement.** After expanding  $(\text{id} \otimes \Psi) \circ \text{copy}$  and substituting the copy Choi, the composition sum collapses to one tensor entry at `copyIdx`.

**Proof.** The key step rewrites with the definition of the bit coassociativity right, the underlying completely positive map of a composite for superoperators, the coordinate formula for intrinsic Choi composition and the underlying completely positive map of a tensor product for superoperators.

#### Lean 4 source `QLambda/Linear/FragmentClassicalBitCoassoc/bitCoassocRight_choi_collapsed.lean`

```
theorem bitCoassocRight_choi_collapsed
  (a b : Fin 8) (i j : Fin 2) :
  bitCoassocRight.cp.choi (a, i) (b, j) =
    (CPMap.tensor (CPMap.identity 2)
      (bitCopySuperoperator.cp.comp bitDephaseSuperoperator.cp)).choi
      (a, copyIdx i) (b, copyIdx j) := by
  simp only [bitCoassocRight, Superoperator.cp_comp, CPMMap.choi_comp_apply,
    Superoperator.cp_tensor, Superoperator.identity]
  simp_rw [bitCopy_choi_pair]
  exact sum_bitCopy_selector _ i j
```

#### 2.4.73 Choi matrix of classical copy: support on the computational copy subspace

**Statement.** Choi matrix of classical copy: support on the computational copy subspace. Formally: `bitCopySuperoperator.cp.choi (a, i) (b, j) = if a.val = i.val * 3 ∧ b.val = j.val * 3 then 1 else 0`.

**Proof.** The argument splits on the relevant condition. The goal is simplified using the definition of the bit copy superoperator, the underlying completely positive map of the map induced by an isometry for superoperators, the Choi matrix of the map determined by a Kraus family and the Choi matrix of a single-entry element for Kraus families.

#### Lean 4 source `QLambda/Linear/FragmentClassicalBitCoassoc/bitCopy_choi.lean`

```
theorem bitCopy_choi (a b : Fin 4) (i j : Fin 2) :
  bitCopySuperoperator.cp.choi (a, i) (b, j) =
    if a.val = i.val * 3 /\ b.val = j.val * 3 then (1 : ?) else 0 := by
  simp only [bitCopySuperoperator, Superoperator.cp_ofIsometry,
    CPMMap.choi_ofKraus, KrausFamily.choi_single, KrausFamily.choiTerm,
    classicalCopyMatrix]
  split_ifs <|> simp_all [star_one, star_zero]
```

#### 2.4.74 Bit copy of the Choi matrix of a pair

**Statement.** For indexes  $p, q$ : the Choi matrix of  $q$  equals if  $p.1.val = p.2.val * 3 \wedge q.1.val = q.2.val * 3$  then 1 else 0.

**Proof.** By case analysis on the index  $p$ .

**Lean 4 source** `QLambda/Linear/FragmentClassicalBitCoassoc/bitCopy_choi.lean`

```
theorem bitCopy_choi_pair (p q : Fin 4 × Fin 2) :
  bitCopySuperoperator.cp.choi p q =
    if p.1.val = p.2.val * 3 /\ q.1.val = q.2.val * 3 then (1 : ?) else 0 := by
  rcases p with <a, i>
  rcases q with <b, j>
  simpa using bitCopy_choi a b i j
```

#### 2.4.75 Bit copy of a composite of the dephase of the Choi matrix

**Statement.** For indexes  $a, b, i, j$ : an explicit expression in the composition, the bit copy superoperator and the bit dephase superoperator equals if  $i = j \wedge a.val = i.val * 3 \wedge b.val = j.val * 3$  then 1 else 0.

**Proof.** It follows from the underlying completely positive map of a composite for superoperators, the coordinate formula for intrinsic Choi composition, the definition of the bit copy superoperator and the underlying completely positive map of the map induced by an isometry for superoperators.

**Lean 4 source** `QLambda/Linear/FragmentClassicalBitCoassoc/bitCopy_comp_dephase_choi.lean`

```
theorem bitCopy_comp_dephase_choi
  (a b : Fin 4) (i j : Fin 2) :
  (Superoperator.comp bitCopySuperoperator
    bitDephaseSuperoperator).cp.choi (a, i) (b, j) =
    if i = j /\ a.val = i.val * 3 /\ b.val = j.val * 3 then 1 else 0 := by
  have h00 :
    ((Composer.splitWire (0 : Fin 1)) ((Composer.basisEquiv 1) 0)).1 =
      false := by decide
  have h01 :
    ((Composer.splitWire (0 : Fin 1)) ((Composer.basisEquiv 1) 1)).1 =
      true := by decide
  fin_cases a <|> fin_cases b <|> fin_cases i <|> fin_cases j <|>
  norm_num [Superoperator.cp_comp, CPMMap.choi_comp_apply,
    bitCopySuperoperator, Superoperator.cp_ofIsometry,
    CPMMap.choi_ofKraus, bitDephaseSuperoperator,
    CPMMap.choi_add, Matrix.add_apply,
    Instrument.measure_branch_zero, Instrument.measure_branch_one,
    classicalCopyMatrix, KrausFamily.choiTerm,
    Matrix.conjTranspose_apply,
    Composer.projector, Composer.onWire, Composer.registerSplit,
    Composer.proj_2, CQ.QDim, h00, h01]
```

#### 2.4.76 Pair-form of the copy◦dephase Choi formula, for rewriting under tensor

**Statement.** Pair-form of the copy◦dephase Choi formula, for rewriting under tensor.

**Proof.** By case analysis on the index  $p$ .

**Lean 4 source** [QLambda/Linear/FragmentClassicalBitCoassoc/bitCopy\\_comp\\_dephase\\_raw\\_choi\\_pair.lean](#)

```
theorem bitCopy_comp_dephase_raw_choi_pair
  (p q : Fin 4 → Fin 2) :
  (bitCopySuperoperator.cp.comp bitDephaseSuperoperator.cp).choi p q =
    if p.2 = q.2 /\ p.1.val = p.2.val * 3 /\ q.1.val = q.2.val * 3 then
      (1 : ?) else 0 := by
  rcases p with <a, i>
  rcases q with <b, j>
  simpa only [← Superoperator.cp_comp] using
    bitCopy_comp_dephase_choi a b i j
```

#### 2.4.77 The unique $\text{Fin } 4$ index with value $3 \cdot k$

**Definition.** The unique  $\text{Fin } 4$  index with value  $3 \cdot k$ .

**Construction.** Constructed by supplying each component of the structure explicitly.

**Lean 4 source** [QLambda/Linear/FragmentClassicalBitCoassoc/copyIdx.lean](#)

```
def copyIdx (k : Fin 2) : Fin 4 := <k.val * 3, by fin_omega>
```

#### 2.4.78 Equality with copy index of the equivalence

**Statement.** For indexes  $x, i$ : the val of  $x$  equals the product of the val of  $i$  and 3  $\leftrightarrow x = \text{copyIdx } i$ .

**Proof.** The witness is assembled directly from its components.

**Lean 4 source** [QLambda/Linear/FragmentClassicalBitCoassoc/copyIdx.lean](#)

```
theorem eq_copyIdx_iff (x : Fin 4) (i : Fin 2) :
  x.val = i.val * 3 <-> x = copyIdx i :=
  <fun h => Fin.ext h, fun h => h |> rfl>
```

#### 2.4.79 Copy's Choi selects a single intermediate pair, collapsing composition sums

**Statement.** Copy's Choi selects a single intermediate pair, collapsing composition sums.

**Proof.** The key step rewrites with the equality with copy index of the equivalence and standard identities for finite sums.

**Lean 4 source** [QLambda/Linear/FragmentClassicalBitCoassoc/copyIdx.lean](#)

```
theorem sum_bitCopy_selector (F : Fin 4 → Fin 4 → ?) (i j : Fin 2) :
  (? x : Fin 4, ? y : Fin 4,
    F x y * (if x.val = i.val * 3 /\ y.val = j.val * 3 then (1 : ?) else 0)) =
    F (copyIdx i) (copyIdx j) := by
  classical
  have hsel (x y : Fin 4) :
    (if x.val = i.val * 3 /\ y.val = j.val * 3 then (1 : ?) else 0) =
      (if x = copyIdx i /\ y = copyIdx j then 1 else 0) := by
```

```

    simp [eq_copyIdx_iff]
simp_rw [hse1]
rw [Finset.sum_eq_single (copyIdx i)]
* rw [Finset.sum_eq_single (copyIdx j)]
  * simp
  * intro y _ hy; simp [hy]
  * simp
* intro x _ hx; simp [hx]
* simp

```

#### 2.4.80 Identity of a tensor product of the $\Psi$ map at the copy

**Statement.** Evaluate  $(\text{id} \otimes (\text{copy} \circ \text{dephase})).\text{choi}$  at  $(a, 3i) / (b, 3j)$ .

**Proof.** The key step rewrites with the definition of the triple copy Choi, the Choi matrix of a tensor product for completely positive maps, the definition of the Choi tensor product equivalence and the identity of the Choi matrix of a pair. The remaining numerical facts are checked by direct computation.

**Lean 4 source** [QLambda/Linear/FragmentClassicalBitCoassoc/id\\_tensor\\_Psi\\_at\\_copy.lean](#)

```

theorem id_tensor_Psi_at_copy
  (a b : Fin 8) (i j : Fin 2) :
  (CMap.tensor (CMap.identity 2)
    (bitCopySuperoperator.cp.comp bitDephaseSuperoperator.cp)).choi
    (a, copyIdx i) (b, copyIdx j) =
    tripleCopyChoi a b i j := by
  dsimp only [tripleCopyChoi]
  simp only [CMap.choi_tensor, reindex_apply, submatrix_apply, kroneckerMap_apply]
  simp only [CMap.choiTensorEquiv]
  simp_rw [identity_choi_pair, bitCopy_comp_dephase_raw_choi_pair]
  simp only [finProdFinEquiv, Fin.divNat, Fin.modNat, copyIdx]
  fin_cases i <|> fin_cases j <|> fin_cases a <|> fin_cases b <|> norm_num

```

#### 2.4.81 Identity of the Choi matrix of a pair

**Statement.** For a natural number  $n$ , indexes  $p, q$ :  $(\text{CMap.identity } n).\text{choi } p \ q = \text{if } p.1 = p.2 \wedge q.1 = q.2 \text{ then } 1 \text{ else } 0$ .

**Proof.** By case analysis on the index  $p$ . The goal is simplified using the definition of the identity, the Choi matrix of the map determined by a Kraus family, the definition of the Choi term and standard identities for matrices.

**Lean 4 source** [QLambda/Linear/FragmentClassicalBitCoassoc/identity\\_choi\\_pair.lean](#)

```

theorem identity_choi_pair (n : Nat) (p q : Fin n x Fin n) :
  (CMap.identity n).choi p q =
    if p.1 = p.2 /\ q.1 = q.2 then (1 : ?) else 0 := by
  rcases p with <a, i>
  rcases q with <b, j>
  simp [CMap.identity, CMap.choi_ofKraus, KrausFamily.identity,
    KrausFamily.choiTerm, Matrix.one_apply]
  split_ifs <|> simp_all

```

#### 2.4.82 The $2 \otimes 2 \otimes 2$ associator is the identity on the shared $\text{Fin } 8$ encoding

**Statement.** The  $2 \otimes 2 \otimes 2$  associator is the identity on the shared  $\text{Fin } 8$  encoding. Formally: `Superoperator.tensorAssociatorEquiv 2 2 2 = Equiv.refl (Fin ((2 * 2) * 2))`.

**Proof.** Both sides are compared pointwise (by extensionality). The claim is decidable and is checked by exhaustive evaluation.

**Lean 4 source** `QLambda/Linear/FragmentClassicalBitCoassoc/tensorAssociatorEquiv_two_two_two.lean`

```
theorem tensorAssociatorEquiv_two_two_two :
  Superoperator.tensorAssociatorEquiv 2 2 2 =
    Equiv.refl (Fin ((2 * 2) * 2)) := by
  ext x
  fin_cases x <|> decide
```

#### 2.4.83 Tensor associator of the two of the two of the two

**Statement.** The tensor associator at 2, 2, 2 equals the identity on dimension the product of  $2 * 2$  and 2.

**Proof.** The goal is simplified using the definition of the tensor associator, the fact that the  $2 \otimes 2 \otimes 2$  associator is the identity on the shared  $\text{Fin } 8$  encoding and the reflexivity of the map induced by an index equivalence.

**Lean 4 source** `QLambda/Linear/FragmentClassicalBitCoassoc/tensorAssociator_two_two_two.lean`

```
theorem tensorAssociator_two_two_two :
  Superoperator.tensorAssociator 2 2 2 =
    Superoperator.identity ((2 * 2) * 2) := by
  simp only [Superoperator.tensorAssociator, tensorAssociatorEquiv_two_two_two,
    Superoperator.ofEquivalence_refl]
```

#### 2.4.84 Closed Choi formula for classical triple copy on $\text{Fin } 8 \times \text{Fin } 2$

**Definition.** Closed Choi formula for classical triple copy on  $\text{Fin } 8 \times \text{Fin } 2$ .

**Construction.** Defined to be `if i = j ∧ a.val = i.val * 7 ∧ b.val = j.val * 7 then 1 else 0`.

**Lean 4 source** `QLambda/Linear/FragmentClassicalBitCoassoc/tripleCopyChoi.lean`

```
def tripleCopyChoi (a b : Fin 8) (i j : Fin 2) : ? :=
  if i = j /\ a.val = i.val * 7 /\ b.val = j.val * 7 then 1 else 0
```

#### 2.4.85 Well-typedness of the well-scopedness

**Statement.** If  $M$  has type  $A$  under the unrestricted context  $\Gamma$  and the linear context  $\Delta$ , then `Scoped  $\Delta$ .length  $\Gamma$ .length  $M$` .

**Proof.** By induction on the derivation that  $M$  has type  $A$  under the unrestricted context  $\Gamma$  and the linear context  $\Delta$ . For an unrestricted variable and a linear variable, the claim is checked directly; for an unrestricted lambda abstraction, a linear lambda abstraction, a linear application, an unrestricted application, a pair, a pair elimination, a conditional and a measurement, the claim follows from the induction hypothesis; the cases of a unit, a bit literal and a primitive are immediate; for a least fixed point, a fold and an unfolding, the claim is one of the premises of the rule. The goal is simplified using the definition of the well-scopedness and the fact that a successful lookup position lies below the length of the list.

#### Lean 4 source `QLambda/Linear/Metatheory.lean`

```
theorem typed_scoped {Gamma Delta M A} (h : HasType Gamma Delta M A) :
  Scoped Delta.length Gamma.length M := by
  induction h with
  | varU hlookup _ _ => exact hlookup.lt_length
  | varL hlookup _ => exact hlookup.lt_length
  | lamU _ _ _ ih => simpa [Scoped] using ih
  | lamL _ _ ih => simpa [Scoped] using ih
  | appL hsplit _ _ ihF ihX =>
    obtain <hFlen, hXlen> := hsplit.lengths
    exact <hFlen.symm |> ihF, hXlen.symm |> ihX>
  | appU hsplit _ _ ihF ihX =>
    obtain <hFlen, hXlen> := hsplit.lengths
    exact <hFlen.symm |> ihF, hXlen.symm |> ihX>
  | unit _ => trivial
  | bitLit _ => trivial
  | pair hsplit _ _ ihM ihN =>
    obtain <hMlen, hNlen> := hsplit.lengths
    exact <hMlen.symm |> ihM, hNlen.symm |> ihN>
  | unpair hsplit _ _ ihM ihK =>
    obtain <hMlen, hKlen> := hsplit.lengths
    exact <hMlen.symm |> ihM, hKlen.symm |> ihK>
  | ite hsplit _ _ _ ihB ihT ihE =>
    obtain <hBlen, hBranchLen> := hsplit.lengths
    exact <hBlen.symm |> ihB, hBranchLen.symm |> ihT,
      hBranchLen.symm |> ihE>
  | prim _ => trivial
  | measure hsplit _ _ ihQ ihK =>
    obtain <hQlen, hKlen> := hsplit.lengths
    exact <hQlen.symm |> ihQ, hKlen.symm |> ihK>
  | fix _ _ _ _ ih => exact ih
  | fold _ _ ih => exact ih
  | unfold _ _ ih => exact ih
```

### 2.4.86 Closed term of the well-typedness of the well-scopedness

**Statement.** If  $M$  has type  $A$  under the unrestricted context  $[]$  and the linear context  $[]$ , then  $\text{Scoped } 0 \ 0 \ M$ .

**Proof.** The goal is closed by simplification with the defining equations.

#### Lean 4 source `QLambda/Linear/Metatheory.lean`

```
theorem closed_typed_scoped {M A} (h : HasType [] [] M A) :
  Scoped 0 0 M := by
```

```
simp using typed_scoped h
```

#### 2.4.87 The linear de Bruijn shift of the closed term is well typed

**Statement.** If  $M$  has type  $A$  under the unrestricted context  $[]$  and the linear context  $[]$ , then the linear de Bruijn shift of  $d$  and  $M$  at  $0$  equals  $M$ .

**Proof.** This is an instance of the fact that the linear de Bruijn shift respects well-scopedness.

**Lean 4 source** [QLambda/Linear/Metatheory.lean](#)

```
theorem shiftLin_closed_typed {d M A} (h : HasType [] [] M A) :
  shiftLin d 0 M = M :=
  shiftLin_eq_of_scoped (closed_typed_scoped h)
```

#### 2.4.88 The unrestricted de Bruijn shift of the closed term is well typed

**Statement.** If  $M$  has type  $A$  under the unrestricted context  $[]$  and the linear context  $[]$ , then the unrestricted de Bruijn shift of  $d$  and  $M$  at  $0$  equals  $M$ .

**Proof.** This is an instance of the fact that the unrestricted de Bruijn shift respects well-scopedness.

**Lean 4 source** [QLambda/Linear/Metatheory.lean](#)

```
theorem shiftUnres_closed_typed {d M A} (h : HasType [] [] M A) :
  shiftUnres d 0 M = M :=
  shiftUnres_eq_of_scoped (closed_typed_scoped h)
```

#### 2.4.89 Insert an unrestricted assumption at an arbitrary de Bruijn cutoff

**Statement.** Insert an unrestricted assumption at an arbitrary de Bruijn cutoff. Formally:  $\text{HasType } \Gamma' \Delta (\text{shiftUnres } 1 \ k \ M) \ A$ .

**Proof.** By induction on the derivation that  $M$  has type  $A$  under the unrestricted context  $\Gamma$  and the linear context  $\Delta$ . For an unrestricted variable, a linear variable, a unit, a bit literal and a primitive, the claim is checked directly; for an unrestricted lambda abstraction, a linear lambda abstraction, a linear application, an unrestricted application, a pair, a pair elimination, a conditional, a measurement, a least fixed point, a fold and an unfolding, the claim follows from the induction hypothesis. The goal is simplified using the definition of the unrestricted de Bruijn shift.

**Lean 4 source** [QLambda/Linear/Metatheory.lean](#)

```
theorem shiftUnres_typing {Gamma Gamma' Delta M A C k}
  (hi : InsertAt C k Gamma Gamma') (h : HasType Gamma Delta M A) :
  HasType Gamma' Delta (shiftUnres 1 k M) A := by
  induction h generalizing Gamma' k C with
  | varU hlookup hdup hnone =>
    simp [shiftUnres] using
    HasType.varU (hlookup.insertAt hi) hdup hnone
  | varL hlookup honly =>
    simp [shiftUnres] using HasType.varL (Gamma := Gamma') hlookup honly
  | lamU hadm hdup hnone hM ih =>
```



```

      simpa [shiftUnres] using
        HasType.lamU hadm hdup hnone (ih (InsertAt.succ hi))
| lamL hadm hM ih =>
  simpa [shiftUnres] using HasType.lamL hadm (ih hi)
| appL hs hF hX ihF ihX =>
  simpa [shiftUnres] using HasType.appL hs (ihF hi) (ihX hi)
| appU hs hnone hF hX ihF ihX =>
  simpa [shiftUnres] using
    HasType.appU hs hnone (ihF hi) (ihX hi)
| unit hnone => simpa [shiftUnres] using HasType.unit (Gamma := Gamma') hnone
| bitLit hnone =>
  simpa [shiftUnres] using HasType.bitLit (Gamma := Gamma') hnone
| pair hs hM hN ihM ihN =>
  simpa [shiftUnres] using HasType.pair hs (ihM hi) (ihN hi)
| unpair hs hM hK ihM ihK =>
  simpa [shiftUnres] using HasType.unpair hs (ihM hi) (ihK hi)
| ite hs hB hT hE ihB ihT ihE =>
  simpa [shiftUnres] using
    HasType.ite hs (ihB hi) (ihT hi) (ihE hi)
| prim hnone => simpa [shiftUnres] using HasType.prim (Gamma := Gamma') hnone
| measure hs hQ hK ihQ ihK =>
  simpa [shiftUnres] using HasType.measure hs (ihQ hi) (ihK hi)
| fix hadm hdup hnone hM ih =>
  simpa [shiftUnres] using HasType.fix hadm hdup hnone (ih hi)
| fold hadm hM ih =>
  simpa [shiftUnres] using HasType.fold hadm (ih hi)
| unfold hadm hM ih =>
  simpa [shiftUnres] using HasType.unfold hadm (ih hi)

```

## 2.4.90 Insert an unused linear cell at an arbitrary de Bruijn cutoff

**Statement.** Insert an unused linear cell at an arbitrary de Bruijn cutoff. Formally:  $\text{HasType } \Gamma \Delta' (\text{shiftLin } 1 \ k \ M) \ A$ .

**Proof.** By induction on the derivation that  $M$  has type  $A$  under the unrestricted context  $\Gamma$  and the linear context  $\Delta$ . For an unrestricted variable, a linear variable, a unit, a bit literal and a primitive, the claim is checked directly; for an unrestricted lambda abstraction, a linear lambda abstraction, a linear application, an unrestricted application, a pair, a pair elimination, a conditional, a measurement, a least fixed point, a fold and an unfolding, the claim follows from the induction hypothesis. The goal is simplified using the definition of the linear de Bruijn shift.

### Lean 4 source `QLambda/Linear/Metatheory.lean`

```

theorem shiftLin_typing {Gamma Delta Delta' M A k}
  (hi : InsertAt (Option.none : Option Ty) k Delta Delta')
  (h : HasType Gamma Delta M A) :
  HasType Gamma Delta' (shiftLin 1 k M) A := by
  induction h generalizing Delta' k with
  | varU hlookup hdup hnone =>
    simpa [shiftLin] using
      HasType.varU hlookup hdup (AllNone.insertNone hi hnone)
  | varL hlookup honly =>
    simpa [shiftLin] using
      HasType.varL (hlookup.insertAt hi) (honly.insertNone hi)

```

```

| lamU hadm hdup hnone hM ih =>
  simpa [shiftLin] using
    HasType.lamU hadm hdup (AllNone.insertNone hi hnone) (ih hi)
| lamL hadm hM ih =>
  simpa [shiftLin] using HasType.lamL hadm (ih (InsertAt.succ hi))
| appL hs hF hX ihF ihX =>
  obtain <Delta_1', Delta_2', hi_1, hi_2, hs'> := hs.insertNone hi
  simpa [shiftLin] using HasType.appL hs' (ihF hi_1) (ihX hi_2)
| appU hs hnone hF hX ihF ihX =>
  obtain <DeltaF', DeltaX', hiF, hiX, hs'> := hs.insertNone hi
  simpa [shiftLin] using
    HasType.appU hs' (AllNone.insertNone hiX hnone)
    (ihF hiF) (ihX hiX)
| unit hnone =>
  simpa [shiftLin] using HasType.unit (AllNone.insertNone hi hnone)
| bitLit hnone =>
  simpa [shiftLin] using HasType.bitLit (AllNone.insertNone hi hnone)
| pair hs hM hN ihM ihN =>
  obtain <Delta_1', Delta_2', hi_1, hi_2, hs'> := hs.insertNone hi
  simpa [shiftLin] using HasType.pair hs' (ihM hi_1) (ihN hi_2)
| unpair hs hM hK ihM ihK =>
  obtain <Delta_1', Delta_2', hi_1, hi_2, hs'> := hs.insertNone hi
  simpa [shiftLin] using HasType.unpair hs' (ihM hi_1) (ihK hi_2)
| ite hs hB hT hE ihB ihT ihE =>
  obtain <Delta_1', Delta_2', hi_1, hi_2, hs'> := hs.insertNone hi
  simpa [shiftLin] using
    HasType.ite hs' (ihB hi_1) (ihT hi_2) (ihE hi_2)
| prim hnone =>
  simpa [shiftLin] using HasType.prim (AllNone.insertNone hi hnone)
| measure hs hQ hK ihQ ihK =>
  obtain <Delta_1', Delta_2', hi_1, hi_2, hs'> := hs.insertNone hi
  simpa [shiftLin] using HasType.measure hs' (ihQ hi_1) (ihK hi_2)
| fix hadm hdup hnone hM ih =>
  simpa [shiftLin] using
    HasType.fix hadm hdup (AllNone.insertNone hi hnone) (ih hi)
| fold hadm hM ih =>
  simpa [shiftLin] using HasType.fold hadm (ih hi)
| unfold hadm hM ih =>
  simpa [shiftLin] using HasType.unfold hadm (ih hi)

```

#### 2.4.91 Unrestricted weakening

**Statement.** If  $M$  has type  $A$  under the unrestricted context  $\Gamma$  and the linear context  $\Delta$ , then  $\text{liftUnres } 0 \ M$  has type  $A$  under the unrestricted context  $C$  and the linear context  $\Delta$ .

**Proof.** This is an instance of the insert an unrestricted assumption at an arbitrary de Bruijn cutoff, applied to the definition of the zero and the hypothesis that  $M$  has type  $A$  under the unrestricted context  $\Gamma$  and the linear context  $\Delta$ .

#### Lean 4 source `QLambda/Linear/Metatheory.lean`

```

theorem weakenUnres {Gamma Delta M A C} (h : HasType Gamma Delta M A) :
  HasType (C :: Gamma) Delta (liftUnres 0 M) A :=
  shiftUnres_typing (InsertAt.zero Gamma) h

```

#### 2.4.92 Weakening by an absent linear cell

**Statement.** If  $M$  has type  $A$  under the unrestricted context  $\Gamma$  and the linear context  $\Delta$ , then  $\text{liftLin } 0 \ M$  has type  $A$  under the unrestricted context  $\Gamma$  and the linear context  $\text{none}$ .

**Proof.** This is an instance of the insert an unused linear cell at an arbitrary de Bruijn cutoff, applied to the definition of the zero and the hypothesis that  $M$  has type  $A$  under the unrestricted context  $\Gamma$  and the linear context  $\Delta$ .

##### Lean 4 source `QLambda/Linear/Metatheory.lean`

```
theorem weakenLinNone {Gamma Delta M A} (h : HasType Gamma Delta M A) :  
  HasType Gamma (none :: Delta) (liftLin 0 M) A :=  
  shiftLin_typing (InsertAt.zero Delta) h
```

#### 2.4.93 Typing over an all-unused linear context depends only on its length

**Statement.** Typing over an all-unused linear context depends only on its length. Formally:  $\text{HasType } \Gamma \Delta_2 \ M \ A$ .

**Proof.** The goal is closed by simplification with the defining equations.

##### Lean 4 source `QLambda/Linear/Metatheory.lean`

```
theorem allNone_typing_transport {Gamma Delta_1 Delta_2 M A}  
  (h : HasType Gamma Delta_1 M A) (hn_1 : AllNone Delta_1) (hn_2 : AllNone Delta_2)  
  (hlen : Delta_1.length = Delta_2.length) :  
  HasType Gamma Delta_2 M A := by  
  have : Delta_1 = Delta_2 := allNone_unique hn_1 hn_2 hlen  
  simpa [this] using h
```

#### 2.4.94 Absence of a lookup hit for empty usage masks

**Statement.** If  $\Delta$  is an empty usage mask, then it is not the case that position  $n$  of  $\Delta$  holds some  $A$ .

**Proof.** By induction on  $\Delta$ . The case of the empty split cannot occur; for a context extended by one cell, the claim follows from the induction hypothesis. The goal is simplified using the definition of the empty usage mask.

##### Lean 4 source `QLambda/Linear/Metatheory.lean`

```
theorem AllNone.noLookupSome {Delta n A} (hn : AllNone Delta) :  
  not Lookup Delta n (some A) := by  
  intro h1  
  induction Delta generalizing n with  
  | nil => cases h1  
  | cons cell Delta ih =>  
    cases cell with  
    | some B => simp [AllNone] at hn  
    | none =>  
      simp only [AllNone] at hn  
      cases h1 with  
      | succ h1 => exact ih hn h1
```

### 2.4.95 Delete an unused linear cell at a de Bruijn cutoff

**Definition.** Delete an unused linear cell at a de Bruijn cutoff.

**Construction.** Generated by the rules `zero` and `succ`. Every element arises from finitely many applications of these rules, so properties are proved by induction over them.

**Lean 4 source** `QLambda/Linear/Metatheory.lean`

```
inductive DropLin : Nat -> List (Option Ty) -> List (Option Ty) -> Prop where
| zero (Delta) : DropLin 0 (none :: Delta) Delta
| succ {k Delta Delta' cell} : DropLin k Delta Delta' ->
  DropLin (k + 1) (cell :: Delta) (cell :: Delta')
```

### 2.4.96 Empty usage mask for linear-cell deletions

**Statement.** If `DropLin k  $\Delta$   $\Delta'$`  and  $\Delta$  is an empty usage mask, then  $\Delta'$  is an empty usage mask.

**Proof.** By induction on the derivation that `DropLin k  $\Delta$   $\Delta'$` . For zero, the claim is checked directly; for a successor, the claim follows from the induction hypothesis. The goal is simplified using the definition of the empty usage mask.

**Lean 4 source** `QLambda/Linear/Metatheory.lean`

```
theorem DropLin.allNone {k Delta Delta'} (hd : DropLin k Delta Delta')
  (hn : AllNone Delta) : AllNone Delta' := by
  induction hd with
  | zero => simp [AllNone] using hn
  | succ hd ih =>
    cases ?Option Ty? with
    | none =>
      simp only [AllNone] at hn |-
      exact ih hn
    | some A => simp [AllNone] at hn
```

### 2.4.97 Absence of the substituted variable for linear-cell deletions

**Statement.** If `DropLin k  $\Delta$   $\Delta'$` , then it is not the case that position  $k$  of  $\Delta$  holds some  $A$ .

**Proof.** By induction on the derivation that `DropLin k  $\Delta$   $\Delta'$` . For zero, the claim is checked directly; for a successor, the claim follows from the induction hypothesis.

**Lean 4 source** `QLambda/Linear/Metatheory.lean`

```
theorem DropLin.noLookupTarget {k Delta Delta' A}
  (hd : DropLin k Delta Delta') : not (Lookup Delta k (some A)) := by
  induction hd with
  | zero =>
    intro h
    cases h
  | succ hd ih =>
    intro h
    cases h with
    | succ h => exact ih h
```

### 2.4.98 A split drops an absent cell in both children

**Statement.** A split drops an absent cell in both children. Formally:  $\exists \Delta_1' \Delta_2', \text{DropLin } k \Delta_1 \Delta_1' \wedge \text{DropLin } k \Delta_2 \Delta_2' \wedge \text{OSplit } \Delta' \Delta_1' \Delta_2'$ .

**Proof.** By induction on the derivation that  $\text{DropLin } k \Delta \Delta'$ . For zero, the claim is checked directly; for a successor, the claim follows from the induction hypothesis.

#### Lean 4 source `QLambda/Linear/Metatheory.lean`

```
theorem DropLin.split {k Delta Delta' Delta_1 Delta_2}
  (hd : DropLin k Delta Delta') (hs : OSplit Delta Delta_1 Delta_2) :
  exists Delta_1' Delta_2', DropLin k Delta_1 Delta_1' /\ DropLin k Delta_2
  Delta_2' /\
  OSplit Delta' Delta_1' Delta_2' := by
  induction hd generalizing Delta_1 Delta_2 with
  | zero =>
    cases hs with
    | none hs => exact <_, _, .zero _, .zero _, hs>
  | succ hd ih =>
    cases hs with
    | none hs =>
      obtain <Delta_1', Delta_2', h_1, h_2, hs'> := ih hs
      exact <_, _, .succ h_1, .succ h_2, .none hs'>
    | left hs =>
      obtain <Delta_1', Delta_2', h_1, h_2, hs'> := ih hs
      exact <_, _, .succ h_1, .succ h_2, .left hs'>
    | right hs =>
      obtain <Delta_1', Delta_2', h_1, h_2, hs'> := ih hs
      exact <_, _, .succ h_1, .succ h_2, .right hs'>
```

### 2.4.99 Variable for linear-cell deletions

**Statement.** If  $\text{DropLin } k \Delta \Delta'$ ; position  $n$  of  $\Delta$  holds some  $A$ ; and  $\Delta$  is occupied exactly at position  $n$ , then there is  $n'$  such that  $\text{substLin } k V (.var .lin n) = .var .lin n'$ , position  $n'$  of  $\Delta'$  holds some  $A$  and  $\Delta'$  is occupied exactly at position  $n'$ .

**Proof.** By induction on the derivation that  $\text{DropLin } k \Delta \Delta'$ . For zero, the claim is checked directly; for a successor, the claim follows from the induction hypothesis. The key step rewrites with the definition of the linear substitution, the definition of the single-cell usage mask and standard identities for natural numbers.

#### Lean 4 source `QLambda/Linear/Metatheory.lean`

```
theorem DropLin.var {k Delta Delta' n A V}
  (hd : DropLin k Delta Delta') (hl : Lookup Delta n (some A))
  (ho : OnlySomeAt Delta n) :
  exists n', substLin k V (.var .lin n) = .var .lin n' /\
  Lookup Delta' n' (some A) /\ OnlySomeAt Delta' n' := by
  induction hd generalizing n with
  | zero =>
    cases hl with
    | succ hl =>
      exact <_, by simp [substLin], hl, by simp [OnlySomeAt] using ho>
  | @succ k Delta Delta' cell hd ih =>
```

```

cases cell with
| some C =>
  cases hl with
  | zero =>
    exact <0, by simp [substLin], Lookup.zero,
    hd.allNone (by simp [OnlySomeAt] using ho)>
  | succ hl => simp [OnlySomeAt] at ho
| none =>
  cases hl with
  | @succ _ _ n _ hl =>
    obtain <n', heq, hl', ho'> :=
      ih hl (by simp [OnlySomeAt] using ho)
    refine <n' + 1, ?_, Lookup.succ hl', ?_>
    * have hne : n != k := by
      intro h
      subst h
      exact hd.noLookupTarget hl
    by_cases hn : n < k
    * simp [substLin, Nat.succ_lt_succ_iff, hn] at heq | -
      simp [heq]
    * have hnk : k < n :=
      Nat.lt_of_le_of_ne (Nat.le_of_not_gt hn) (Ne.symm hne)
      simp [substLin, Nat.succ_lt_succ_iff, hn, hne] at heq | -
      have hpos : 0 < n :=
        Nat.lt_of_le_of_lt (Nat.zero_le k) hnk
      calc
      n = (n - 1) + 1 :=
        (Nat.sub_add_cancel (Nat.one_le_iff_ne_zero.mpr
          (Nat.ne_of_gt hpos))).symm
      _ = n' + 1 := by rw [heq]
    * simp [OnlySomeAt] using ho'

```

#### 2.4.100 Substitution through a cell known to be unused only lowers indices

**Statement.** Substitution through a cell known to be unused only lowers indices. Formally:  $\text{HasType } \Gamma \Delta' (\text{substLin } k \ V \ M) \ B$ .

**Proof.** By induction on the derivation that  $M$  has type  $B$  under the unrestricted context  $\Gamma$  and the linear context  $\Delta$ . For an unrestricted variable, a linear variable, a unit, a bit literal and a primitive, the claim is checked directly; for an unrestricted lambda abstraction, a linear lambda abstraction, a linear application, an unrestricted application, a pair, a pair elimination, a conditional, a measurement, a least fixed point, a fold and an unfolding, the claim follows from the induction hypothesis. The key step rewrites with the definition of the linear substitution.

#### Lean 4 source `QLambda/Linear/Metatheory.lean`

```

theorem substLin_unused {Gamma Delta Delta' M B V k}
  (hd : DropLin k Delta Delta') (hM : HasType Gamma Delta M B) :
  HasType Gamma Delta' (substLin k V M) B := by
  induction hM generalizing Delta' k V with
  | varU hlookup hdup hnone =>
    simp [substLin] using
      HasType.varU hlookup hdup (hd.allNone hnone)
  | varL hlookup honly =>

```

```

    obtain <n', heq, hlookup', honly'> := hd.var hlookup honly
    rw [heq]
    exact HasType.varL hlookup' honly'
| lamU hadm hdup hnone hM ih =>
    simpa [substLin] using
      HasType.lamU hadm hdup (hd.allNone hnone) (ih hd)
| lamL hadm hM ih =>
    simpa [substLin] using HasType.lamL hadm (ih (DropLin.succ hd))
| appL hs hF hX ihF ihX =>
    obtain <Delta_1', Delta_2', hd_1, hd_2, hs'> := hd.split hs
    simpa [substLin] using HasType.appL hs' (ihF hd_1) (ihX hd_2)
| appU hs hnone hF hX ihF ihX =>
    obtain <DeltaF', DeltaX', hdF, hdX, hs'> := hd.split hs
    simpa [substLin] using
      HasType.appU hs' (hdX.allNone hnone) (ihF hdF) (ihX hdX)
| unit hnone =>
    simpa [substLin] using HasType.unit (hd.allNone hnone)
| bitLit hnone =>
    simpa [substLin] using HasType.bitLit (hd.allNone hnone)
| pair hs hM hN ihM ihN =>
    obtain <Delta_1', Delta_2', hd_1, hd_2, hs'> := hd.split hs
    simpa [substLin] using HasType.pair hs' (ihM hd_1) (ihN hd_2)
| unpair hs hM hK ihM ihK =>
    obtain <Delta_1', Delta_2', hd_1, hd_2, hs'> := hd.split hs
    simpa [substLin] using HasType.unpair hs' (ihM hd_1) (ihK hd_2)
| ite hs hB hT hE ihB ihT ihE =>
    obtain <Delta_1', Delta_2', hd_1, hd_2, hs'> := hd.split hs
    simpa [substLin] using
      HasType.ite hs' (ihB hd_1) (ihT hd_2) (ihE hd_2)
| prim hnone =>
    simpa [substLin] using HasType.prim (hd.allNone hnone)
| measure hs hQ hK ihQ ihK =>
    obtain <Delta_1', Delta_2', hd_1, hd_2, hs'> := hd.split hs
    simpa [substLin] using HasType.measure hs' (ihQ hd_1) (ihK hd_2)
| fix hadm hdup hnone hM ih =>
    simpa [substLin] using
      HasType.fix hadm hdup (hd.allNone hnone) (ih hd)
| fold hadm hM ih =>
    simpa [substLin] using HasType.fold hadm (ih hd)
| unfold hadm hM ih =>
    simpa [substLin] using HasType.unfold hadm (ih hd)

```

#### 2.4.101 Replace one occupied linear cell, merging the replacement resources into the suffix after the de Bruijn cutoff

**Definition.** Replace one occupied linear cell, merging the replacement resources into the suffix after the de Bruijn cutoff.

**Construction.** Generated by the rules `zero` and `succ`. Every element arises from finitely many applications of these rules, so properties are proved by induction over them.

#### Lean 4 source `QLambda/Linear/Metatheory.lean`

```

inductive LinSubCtx (A : Ty) (Deltav : List (Option Ty)) :
  Nat -> List (Option Ty) -> List (Option Ty) -> Prop where

```

```

| zero {Deltam Delta} : OSplit Delta Deltam Deltav ->
  LinSubCtx A Deltav 0 (some A :: Deltam) Delta
| succ {k Deltaold Deltaout cell} : LinSubCtx A Deltav k Deltaold Deltaout ->
  LinSubCtx A Deltav (k + 1) (cell :: Deltaold) (cell :: Deltaout)

```

#### 2.4.102 Lookup of the substituted variable for linear substitution contexts

**Statement.** If  $\text{LinSubCtx } A \Delta v k \Delta_{\text{old}} \Delta_{\text{out}}$ , then position  $k$  of  $\Delta_{\text{old}}$  holds some  $A$ .

**Proof.** By induction on the derivation that  $\text{LinSubCtx } A \Delta v k \Delta_{\text{old}} \Delta_{\text{out}}$ . For zero, the claim is checked directly; for a successor, the claim follows from the induction hypothesis. It follows from the definition of the zero.

##### Lean 4 source `QLambda/Linear/Metatheory.lean`

```

theorem LinSubCtx.lookupTarget {A k Deltaold Deltav Deltaout}
  (hc : LinSubCtx A Deltav k Deltaold Deltaout) :
  Lookup Deltaold k (some A) := by
  induction hc with
  | zero => exact Lookup.zero
  | succ _ ih => exact Lookup.succ ih

```

#### 2.4.103 Split compatibility for used/unused linear substitution

**Statement.** Split compatibility for used/unused linear substitution.

**Proof.** By induction on the derivation that  $\text{LinSubCtx } A \Delta v k \Delta_{\text{old}} \Delta_{\text{out}}$ . For zero, the claim is checked directly; for a successor, the claim follows from the induction hypothesis.

##### Lean 4 source `QLambda/Linear/Metatheory.lean`

```

theorem LinSubCtx.split {A k Deltaold Deltav Deltaout Delta_1 Delta_2}
  (hc : LinSubCtx A Deltav k Deltaold Deltaout)
  (hs : OSplit Deltaold Delta_1 Delta_2) :
  exists Delta_1' Delta_2', OSplit Deltaout Delta_1' Delta_2' /\
    ((LinSubCtx A Deltav k Delta_1 Delta_1' /\ DropLin k Delta_2 Delta_2') /\
      (DropLin k Delta_1 Delta_1' /\ LinSubCtx A Deltav k Delta_2 Delta_2')) := by
  induction hc generalizing Delta_1 Delta_2 with
  | zero hv =>
    cases hs with
    | left htail =>
      obtain <Delta_1', hmerge, hout> := hv.rotate htail
      exact <Delta_1', _, hout, Or.inl <.zero hmerge.symm, .zero _>>
    | right htail =>
      obtain <Delta_2', hmerge, hout> := hv.rotate htail.symm
      exact <_, Delta_2', hout.symm,
        Or.inr <.zero _, .zero hmerge.symm>>
  | @succ k Deltaold Deltaout cell hc ih =>
    cases hs with
    | none hs =>
      obtain <Delta_1', Delta_2', hout, hcases> := ih hs
      rcases hcases with hleft | hright
      * exact <none :: Delta_1', none :: Delta_2', .none hout,
        Or.inl <.succ hleft.1, .succ hleft.2>>

```



```

    * exact <none :: Delta_1', none :: Delta_2', .none hout,
      Or.inr <.succ hright.1, .succ hright.2>>
| left hs =>
  obtain <Delta_1', Delta_2', hout, hcases> := ih hs
  rcases hcases with hleft | hright
  * exact <some _ :: Delta_1', none :: Delta_2', .left hout,
    Or.inl <.succ hleft.1, .succ hleft.2>>
  * exact <some _ :: Delta_1', none :: Delta_2', .left hout,
    Or.inr <.succ hright.1, .succ hright.2>>
| right hs =>
  obtain <Delta_1', Delta_2', hout, hcases> := ih hs
  rcases hcases with hleft | hright
  * exact <none :: Delta_1', some _ :: Delta_2', .right hout,
    Or.inl <.succ hleft.1, .succ hleft.2>>
  * exact <none :: Delta_1', some _ :: Delta_2', .right hout,
    Or.inr <.succ hright.1, .succ hright.2>>

```

#### 2.4.104 Linear de Bruijn shift of one of the cutoff

**Statement.** The linear de Bruijn shift of  $\text{cutoff}$  and the linear de Bruijn shift of  $k$ ,  $\text{cutoff}$ ,  $M$  at 1 equals the linear de Bruijn shift of the sum of  $k$  and 1,  $\text{cutoff}$ ,  $M$ .

**Proof.** By induction on  $M$ . For a variable, the claim is checked directly; for a lambda abstraction, an application, a pair, a pair elimination, a conditional, a measurement, a least fixed point, a fold and an unfolding, the claim follows from the induction hypothesis; the cases of a unit, a bit literal and a primitive are immediate. The goal is simplified using the definition of the linear de Bruijn shift, the fact that addition for finitely supported sums is associative, the fact that addition for finitely supported sums is commutative and standard identities for natural numbers.

#### Lean 4 source `QLambda/Linear/Metatheory.lean`

```

theorem shiftLin_one_after {k cutoff M} :
  shiftLin 1 cutoff (shiftLin k cutoff M) =
    shiftLin (k + 1) cutoff M := by
  induction M generalizing cutoff with
  | var ? i =>
    cases ? with
    | unres => rfl
    | lin =>
      by_cases hi : i < cutoff
      * simp [shiftLin, hi]
      * have hki : cutoff <= k + i :=
        Nat.le_trans (Nat.le_of_not_gt hi) (Nat.le_add_left i k)
        simp [shiftLin, hi, not_lt.mpr hki,
          Nat.add_assoc, Nat.add_comm,
          Nat.add_left_comm]
  | lam ? A M ih =>
    cases ? <|> simp [shiftLin, ih]
  | app F X ihF ihX => simp [shiftLin, ihF, ihX]
  | unit => rfl
  | bitLit _ => rfl
  | pair M N ihM ihN => simp [shiftLin, ihM, ihN]
  | unpair M K ihM ihK => simp [shiftLin, ihM, ihK]
  | ite B T E ihB ihT ihE => simp [shiftLin, ihB, ihT, ihE]

```

```

| prim _ => rfl
| measure Q K ihQ ihK => simp [shiftLin, ihQ, ihK]
| fix A M ih => simp [shiftLin, ih]
| fold A M ih => simp [shiftLin, ih]
| unfold M ih => simp [shiftLin, ih]

```

#### 2.4.105 Linear de Bruijn shift of the linear substitution of the variable

**Statement.** For natural numbers  $k, n$ , a term  $V$ : the linear de Bruijn shift of the linear substitution of  $k, V$ ,  $\text{.var .lin } n$  at  $1, 0$  equals the linear substitution of the sum of  $k$  and  $1$ ,  $V$ , the variable of a linear and  $n + 1$ .

**Proof.** The argument splits on the relevant condition. An equation between variables is used to substitute one for the other. The goal is simplified using the definition of the linear substitution, the definition of the linear de Bruijn shift, standard identities for natural numbers and the linear de Bruijn shift of one of the cutoff.

#### Lean 4 source `QLambda/Linear/Metatheory.lean`

```

theorem shiftLin_substLin_var (k n : Nat) (V : Term) :
  shiftLin 1 0 (substLin k V (.var .lin n)) =
    substLin (k + 1) V (.var .lin (n + 1)) := by
  by_cases hn : n < k
  * simp [substLin, shiftLin, hn, Nat.succ_lt_succ_iff]
  * by_cases heq : n = k
    * subst heq
      simp [substLin, shiftLin_one_after]
    * have hkn : k < n :=
      Nat.lt_of_le_of_ne (Nat.le_of_not_gt hn) (Ne.symm heq)
      have hnpos : 0 < n :=
      Nat.lt_of_le_of_lt (Nat.zero_le k) hkn
      simp [substLin, shiftLin, hn, heq, Nat.succ_lt_succ_iff,
        Nat.sub_add_cancel
        (Nat.one_le_iff_ne_zero.mpr (Nat.ne_of_gt hnpos))]

```

#### 2.4.106 Variable for linear substitution contexts

**Statement.** If  $\text{LinSubCtx } A \Delta_v k \Delta_{\text{old}} \Delta_{\text{out}}$ ;  $V$  has type  $A$  under the unrestricted context  $\Gamma$  and the linear context  $\Delta_v$ ; position  $n$  of  $\Delta_{\text{old}}$  holds some  $B$ ; and  $\Delta_{\text{old}}$  is occupied exactly at position  $n$ , then  $\text{substLin } k V (.var .lin n)$  has type  $B$  under the unrestricted context  $\Gamma$  and the linear context  $\Delta_{\text{out}}$ .

**Proof.** By induction on the derivation that  $\text{LinSubCtx } A \Delta_v k \Delta_{\text{old}} \Delta_{\text{out}}$ . For zero, the claim is checked directly; for a successor, the claim follows from the induction hypothesis. The key step rewrites with the fact that empty left mask determines an ordered context split from the right, the definition of the linear substitution, the linear de Bruijn shift of zero for terms and the definition of the single-cell usage mask.

#### Lean 4 source `QLambda/Linear/Metatheory.lean`

```

theorem LinSubCtx.var {Gamma A B k Deltaold Deltav Deltaout V n}
  (hc : LinSubCtx A Deltav k Deltaold Deltaout)

```

```

(hV : HasType Gamma Deltav V A)
(hl : Lookup Deltaold n (some B)) (ho : OnlySomeAt Deltaold n) :
HasType Gamma Deltaout (substLin k V (.var .lin n)) B := by
induction hc generalizing n Gamma V with
| zero hs =>
  cases hl with
  | zero =>
    rw [hs.eq_right_of_allNone_left
      (by simpa [OnlySomeAt] using ho)]
    simpa [substLin, shiftLin_zero] using hV
  | succ hl => simp [OnlySomeAt] at ho
| @succ k Deltaold Deltaout cell hc ih =>
  cases cell with
  | some C =>
    cases hl with
    | zero =>
      have hnone : AllNone Deltaold := by simpa [OnlySomeAt] using ho
      exact (hnone.noLookupSome hc.lookupTarget).elim
    | succ hl => simp [OnlySomeAt] at ho
  | none =>
    cases hl with
    | @succ _ _ n _ hl =>
      have hrec := ih hV hl (by simpa [OnlySomeAt] using ho)
      have hweak := weakenLinNone hrec
      simpa [liftLin, shiftLin_substLin_var] using hweak

```

## 2.4.107 The used half of linear substitution

**Statement.** The used half of linear substitution; together with `substLin_unused` this follows the unique side of every split containing the substituted variable. Formally:  $\text{HasType } \Gamma \Delta_{\text{out}} (\text{substLin } k \ V \ M) \ B$ .

**Proof.** By induction on the derivation that  $M$  has type  $B$  under the unrestricted context  $\Gamma$  and the linear context  $\Delta_{\text{old}}$ . For an unrestricted variable, a linear variable, an unrestricted lambda abstraction, a unit, a bit literal, a primitive and a least fixed point, the claim is checked directly; for a linear lambda abstraction, a linear application, an unrestricted application, a pair, a pair elimination, a conditional, a measurement, a fold and an unfolding, the claim follows from the induction hypothesis. The goal is simplified using the definition of the linear substitution.

### Lean 4 source `QLambda/Linear/Metatheory.lean`

```

theorem substLin_preserves {Gamma Deltaold Deltav Deltaout M A B V k}
(hc : LinSubCtx A Deltav k Deltaold Deltaout)
(hM : HasType Gamma Deltaold M B) (hV : HasType Gamma Deltav V A) :
HasType Gamma Deltaout (substLin k V M) B := by
induction hM generalizing Deltav Deltaout k V with
| varU hlookup hdup hnone =>
  exact (hnone.noLookupSome hc.lookupTarget).elim
| varL hlookup honly => exact hc.var hV hlookup honly
| lamU hadm hdup hnone hM ih =>
  exact (hnone.noLookupSome hc.lookupTarget).elim
| lamL hadm hM ih =>
  simpa [substLin] using HasType.lamL hadm (ih (.succ hc) hV)
| appL hs hF hX ihF ihX =>

```

```

    obtain <DeltaF', DeltaX', hs', hcases> := hc.split hs
    rcases hcases with hleft | hright
    * simp [substLin] using
      HasType.appL hs' (ihF hleft.1 hV)
      (substLin_unused hleft.2 hX)
    * simp [substLin] using
      HasType.appL hs' (substLin_unused hright.1 hF)
      (ihX hright.2 hV)
| appU hs hnone hF hX ihF ihX =>
    obtain <DeltaF', DeltaX', hs', hcases> := hc.split hs
    rcases hcases with hleft | hright
    * simp [substLin] using
      HasType.appU hs' (hleft.2.allNone hnone)
      (ihF hleft.1 hV) (substLin_unused hleft.2 hX)
    * exact (hnone.noLookupSome hright.2.lookupTarget).elim
| unit hnone =>
    exact (hnone.noLookupSome hc.lookupTarget).elim
| bitLit hnone =>
    exact (hnone.noLookupSome hc.lookupTarget).elim
| pair hs hM hN ihM ihN =>
    obtain <DeltaM', DeltaN', hs', hcases> := hc.split hs
    rcases hcases with hleft | hright
    * simp [substLin] using
      HasType.pair hs' (ihM hleft.1 hV)
      (substLin_unused hleft.2 hN)
    * simp [substLin] using
      HasType.pair hs' (substLin_unused hright.1 hM)
      (ihN hright.2 hV)
| unpair hs hM hK ihM ihK =>
    obtain <DeltaM', DeltaK', hs', hcases> := hc.split hs
    rcases hcases with hleft | hright
    * simp [substLin] using
      HasType.unpair hs' (ihM hleft.1 hV)
      (substLin_unused hleft.2 hK)
    * simp [substLin] using
      HasType.unpair hs' (substLin_unused hright.1 hM)
      (ihK hright.2 hV)
| ite hs hB hT hE ihB ihT ihE =>
    obtain <DeltaB', DeltaR', hs', hcases> := hc.split hs
    rcases hcases with hleft | hright
    * simp [substLin] using
      HasType.ite hs' (ihB hleft.1 hV)
      (substLin_unused hleft.2 hT)
      (substLin_unused hleft.2 hE)
    * simp [substLin] using
      HasType.ite hs' (substLin_unused hright.1 hB)
      (ihT hright.2 hV) (ihE hright.2 hV)
| prim hnone =>
    exact (hnone.noLookupSome hc.lookupTarget).elim
| measure hs hQ hK ihQ ihK =>
    obtain <DeltaQ', DeltaK', hs', hcases> := hc.split hs
    rcases hcases with hleft | hright
    * simp [substLin] using
      HasType.measure hs' (ihQ hleft.1 hV)
      (substLin_unused hleft.2 hK)
    * simp [substLin] using

```

```

      HasType.measure hs' (substLin_unused hright.1 hQ)
      (ihK hright.2 hV)
| fix hadm hdup hnone hM ih =>
  exact (hnone.noLookupSome hc.lookupTarget).elim
| fold hadm hM ih =>
  simp [substLin] using HasType.fold hadm (ih hc hV)
| unfold hadm hM ih =>
  simp [substLin] using HasType.unfold hadm (ih hc hV)

```

#### 2.4.108 The linear substitution of zero preserves the structure

**Statement.** If  $\Delta$  splits into the left part  $\Delta_m$  and the right part  $\Delta_v$ ;  $M$  has type  $B$  under the unrestricted context  $\Gamma$  and the linear context  $\text{some } A$ ; and  $V$  has type  $A$  under the unrestricted context  $\Gamma$  and the linear context  $\Delta_v$ , then  $\text{substLin } 0 \ V \ M$  has type  $B$  under the unrestricted context  $\Gamma$  and the linear context  $\Delta$ .

**Proof.** This is an instance of the used half of linear substitution, applied to the definition of the zero, the hypothesis that  $M$  has type  $B$  under the unrestricted context  $\Gamma$  and the linear context  $\text{some } A$  and the hypothesis that  $V$  has type  $A$  under the unrestricted context  $\Gamma$  and the linear context  $\Delta_v$ .

##### Lean 4 source `QLambda/Linear/Metatheory.lean`

```

theorem substLin_zero_preserves {Gamma Delta Deltam Deltav M V A B}
  (hs : OSplit Delta Deltam Deltav)
  (hM : HasType Gamma (some A :: Deltam) M B)
  (hV : HasType Gamma Deltav V A) :
  HasType Gamma Delta (substLin 0 V M) B :=
  substLin_preserves (.zero hs) hM hV

```

#### 2.4.109 Remove the unrestricted assumption selected by a de Bruijn cutoff

**Definition.** Remove the unrestricted assumption selected by a de Bruijn cutoff. The tail context is a parameter so replacement terms remain outside every crossed binder.

**Construction.** Generated by the rules `zero` and `succ`. Every element arises from finitely many applications of these rules, so properties are proved by induction over them.

##### Lean 4 source `QLambda/Linear/Metatheory.lean`

```

inductive UnresSubCtx (A : Ty) (Gamma : List Ty) :
  Nat -> List Ty -> List Ty -> Prop where
| zero : UnresSubCtx A Gamma 0 (A :: Gamma) Gamma
| succ {k Gammaold Gammaout C} : UnresSubCtx A Gamma k Gammaold Gammaout ->
  UnresSubCtx A Gamma (k + 1) (C :: Gammaold) (C :: Gammaout)

```

#### 2.4.110 Unrestricted de Bruijn shift of one of the cutoff

**Statement.** The unrestricted de Bruijn shift of `cutoff` and the unrestricted de Bruijn shift of  $k$ , `cutoff`,  $M$  at 1 equals the unrestricted de Bruijn shift of the sum of  $k$  and 1, `cutoff`,  $M$ .

**Proof.** By induction on  $M$ . For a variable, the claim is checked directly; for a lambda abstraction, an application, a pair, a pair elimination, a conditional, a measurement, a least fixed point, a fold and an unfolding, the claim follows from the induction hypothesis; the cases of a unit, a bit literal and a primitive are

immediate. The goal is simplified using the definition of the unrestricted de Bruijn shift, the fact that addition for finitely supported sums is associative, the fact that addition for finitely supported sums is commutative and standard identities for natural numbers.

#### Lean 4 source `QLambda/Linear/Metatheory.lean`

```
theorem shiftUnres_one_after {k cutoff M} :
  shiftUnres 1 cutoff (shiftUnres k cutoff M) =
    shiftUnres (k + 1) cutoff M := by
  induction M generalizing cutoff with
  | var ? i =>
    cases ? with
    | lin => rfl
    | unres =>
      by_cases hi : i < cutoff
      * simp [shiftUnres, hi]
      * have hki : cutoff <= k + i :=
          Nat.le_trans (Nat.le_of_not_gt hi) (Nat.le_add_left i k)
        simp [shiftUnres, hi, not_lt.mpr hki,
          Nat.add_assoc, Nat.add_comm, Nat.add_left_comm]
  | lam ? A M ih =>
    cases ? <;> simp [shiftUnres, ih]
  | app F X ihF ihX => simp [shiftUnres, ihF, ihX]
  | unit => rfl
  | bitLit _ => rfl
  | pair M N ihM ihN => simp [shiftUnres, ihM, ihN]
  | unpair M K ihM ihK => simp [shiftUnres, ihM, ihK]
  | ite B T E ihB ihT ihE => simp [shiftUnres, ihB, ihT, ihE]
  | prim _ => rfl
  | measure Q K ihQ ihK => simp [shiftUnres, ihQ, ihK]
  | fix A M ih => simp [shiftUnres, ih]
  | fold A M ih => simp [shiftUnres, ih]
  | unfold M ih => simp [shiftUnres, ih]
```

#### 2.4.111 Unrestricted de Bruijn shift of zero

**Statement.** For a natural number `cutoff`, a term `M`: the unrestricted de Bruijn shift of `cutoff` and `M` at 0 equals `M`.

**Proof.** By induction on the term `M`. For a variable, the claim is checked directly; for a lambda abstraction, an application, a pair, a pair elimination, a conditional, a measurement, a least fixed point, a fold and an unfolding, the claim follows from the induction hypothesis; the cases of a unit, a bit literal and a primitive are immediate. The goal is simplified using the definition of the unrestricted de Bruijn shift.

#### Lean 4 source `QLambda/Linear/Metatheory.lean`

```
theorem shiftUnres_zero (cutoff : Nat) (M : Term) :
  shiftUnres 0 cutoff M = M := by
  induction M generalizing cutoff with
  | var ? i => cases ? <;> simp [shiftUnres]
  | lam ? A M ih => cases ? <;> simp [shiftUnres, ih]
  | app F X ihF ihX => simp [shiftUnres, ihF, ihX]
  | unit => rfl
  | bitLit _ => rfl
```

```

| pair M N ihM ihN => simp [shiftUnres, ihM, ihN]
| unpair M K ihM ihK => simp [shiftUnres, ihM, ihK]
| ite B T E ihB ihT ihE => simp [shiftUnres, ihB, ihT, ihE]
| prim _ => rfl
| measure Q K ihQ ihK => simp [shiftUnres, ihQ, ihK]
| fix A M ih => simp [shiftUnres, ih]
| fold A M ih => simp [shiftUnres, ih]
| unfold M ih => simp [shiftUnres, ih]

```

#### 2.4.112 Unrestricted de Bruijn shift of the unrestricted substitution of the variable

**Statement.** For natural numbers  $k, n$ , a term  $V$ : the unrestricted de Bruijn shift of the unrestricted substitution of  $k, V, \text{.var .unres } n$  at  $1, 0$  equals the unrestricted substitution of the sum of  $k$  and  $1, V$ , the variable of an unrestricted and  $n + 1$ .

**Proof.** The argument splits on the relevant condition. An equation between variables is used to substitute one for the other. The goal is simplified using the definition of the unrestricted substitution, the definition of the unrestricted de Bruijn shift, standard identities for natural numbers and the unrestricted de Bruijn shift of one of the cutoff.

#### Lean 4 source `QLambda/Linear/Metatheory.lean`

```

theorem shiftUnres_substUnres_var (k n : Nat) (V : Term) :
  shiftUnres 1 0 (substUnres k V (.var .unres n)) =
    substUnres (k + 1) V (.var .unres (n + 1)) := by
  by_cases hn : n < k
  * simp [substUnres, shiftUnres, hn, Nat.succ_lt_succ_iff]
  * by_cases heq : n = k
    * subst heq
      simp [substUnres, shiftUnres_one_after]
    * have hkn : k < n :=
      Nat.lt_of_le_of_ne (Nat.le_of_not_gt hn) (Ne.symm heq)
      have hnpos : 0 < n :=
        Nat.lt_of_le_of_lt (Nat.zero_le k) hkn
      simp [substUnres, shiftUnres, hn, heq, Nat.succ_lt_succ_iff,
        Nat.sub_add_cancel
        (Nat.one_le_iff_ne_zero.mpr (Nat.ne_of_gt hnpos))]

```

#### 2.4.113 Variable for unrestricted substitution contexts

**Statement.** If  $\text{UnresSubCtx } A \Gamma k \Gamma_{\text{old}} \Gamma_{\text{out}}; V$  has type  $A$  under the unrestricted context  $\Gamma$  and the linear context  $\Delta v$ ;  $\Delta v$  is an empty usage mask; and  $\Delta v.\text{length} = \Delta.\text{length}$ , then  $\text{substUnres } k V (.var .unres n)$  has type  $B$  under the unrestricted context  $\Gamma_{\text{out}}$  and the linear context  $\Delta$ .

**Proof.** By induction on the derivation that  $\text{UnresSubCtx } A \Gamma k \Gamma_{\text{old}} \Gamma_{\text{out}}$ . For zero, the claim is checked directly; for a successor, the claim follows from the induction hypothesis. The goal is simplified using the definition of the unrestricted substitution, the unrestricted de Bruijn shift of zero, the definition of the unrestricted lifting and the unrestricted de Bruijn shift of the unrestricted substitution of the variable.

#### Lean 4 source `QLambda/Linear/Metatheory.lean`

```

theorem UnresSubCtx.var {A B Gamma Gammaold Gammaout Delta Deltav V k n}

```

```

(hc : UnresSubCtx A Gamma k Gammaold Gammaout)
(hV : HasType Gamma Deltav V A) (hnV : AllNone Deltav)
(hlen : Deltav.length = Delta.length)
(hl : Lookup Gammaold n B) (hdup : Ty.Duplicable B)
(hn : AllNone Delta) :
  HasType Gammaout Delta (substUnres k V (.var .unres n)) B := by
induction hc generalizing n Delta Deltav V with
| zero =>
  cases hl with
  | zero =>
    have hV' := allNone_typing_transport hV hnV hn hlen
    simpa [substUnres, shiftUnres_zero] using hV'
  | succ hl =>
    simpa [substUnres] using HasType.varU hl hdup hn
| @succ k' Gammaold' Gammaout' C hc ih =>
  cases hl with
  | zero =>
    simpa [substUnres] using
      HasType.varU Lookup.zero hdup hn
  | @succ _ _ n _ hl =>
    have hrec := ih hV hnV hlen hl hn
    have hweak := weakenUnres (C := C) hrec
    simpa [liftUnres, shiftUnres_substUnres_var] using hweak

```

#### 2.4.114 Capture-avoiding unrestricted substitution

**Statement.** Capture-avoiding unrestricted substitution. The replacement has empty linear support, as required by unrestricted application. Formally:  $\text{HasType } \Gamma_{\text{out}} \Delta \text{ (substUnres } k \text{ V M) B}$ .

**Proof.** By induction on the derivation that  $M$  has type  $B$  under the unrestricted context  $\Gamma_{\text{old}}$  and the linear context  $\Delta$ . For an unrestricted variable, a linear variable, a unit, a bit literal and a primitive, the claim is checked directly; for an unrestricted lambda abstraction, a linear lambda abstraction, a linear application, an unrestricted application, a pair, a pair elimination, a conditional, a measurement, a least fixed point, a fold and an unfolding, the claim follows from the induction hypothesis. The goal is simplified using the definition of the unrestricted substitution, the definition of the empty usage mask and the hypothesis that  $\Delta v.\text{length} = \Delta.\text{length}$ .

#### Lean 4 source `QLambda/Linear/Metatheory.lean`

```

theorem substUnres_preserves {A B Gamma Gammaold Gammaout Delta Deltav M V k}
  (hc : UnresSubCtx A Gamma k Gammaold Gammaout)
  (hM : HasType Gammaold Delta M B)
  (hV : HasType Gamma Deltav V A) (hnV : AllNone Deltav)
  (hlen : Deltav.length = Delta.length) :
  HasType Gammaout Delta (substUnres k V M) B := by
induction hM generalizing Gammaout Deltav V k with
| varU hlookup hdup hnone =>
  exact hc.var hV hnV hlen hlookup hdup hnone
| varL hlookup honly =>
  simpa [substUnres] using
    HasType.varL (Gamma := Gammaout) hlookup honly
| lamU hadm hdup hnone hM ih =>
  simpa [substUnres] using
    HasType.lamU hadm hdup hnone (ih (.succ hc) hV hnV hlen)

```



```

| @lamL Gamma_0 Delta_0 A_0 B_0 M_0 hadm hM ih =>
  have hV' := weakenLinNone hV
  have hnV' : AllNone (none :: Deltav) := by simpa [AllNone] using hnV
  have hlen' :
    (none :: Deltav).length = (some A_0 :: Delta_0).length := by
      simp [hlen]
  simpa [substUnres] using
    HasType.lamL hadm (ih hc hV' hnV' hlen')
| appL hs hF hX ihF ihX =>
  obtain <hFlen, hXlen> := hs.lengths
  simpa [substUnres] using
    HasType.appL hs (ihF hc hV hnV (hlen.trans hFlen.symm))
    (ihX hc hV hnV (hlen.trans hXlen.symm))
| appU hs hnone hF hX ihF ihX =>
  obtain <hFlen, hXlen> := hs.lengths
  simpa [substUnres] using
    HasType.appU hs hnone
    (ihF hc hV hnV (hlen.trans hFlen.symm))
    (ihX hc hV hnV (hlen.trans hXlen.symm))
| unit hnone =>
  simpa [substUnres] using HasType.unit (Gamma := Gammaout) hnone
| bitLit hnone =>
  simpa [substUnres] using HasType.bitLit (Gamma := Gammaout) hnone
| pair hs hM hN ihM ihN =>
  obtain <hMlen, hNlen> := hs.lengths
  simpa [substUnres] using
    HasType.pair hs (ihM hc hV hnV (hlen.trans hMlen.symm))
    (ihN hc hV hnV (hlen.trans hNlen.symm))
| unpair hs hM hK ihM ihK =>
  obtain <hMlen, hKlen> := hs.lengths
  simpa [substUnres] using
    HasType.unpair hs (ihM hc hV hnV (hlen.trans hMlen.symm))
    (ihK hc hV hnV (hlen.trans hKlen.symm))
| ite hs hB hT hE ihB ihT ihE =>
  obtain <hBlen, hRlen> := hs.lengths
  simpa [substUnres] using
    HasType.ite hs (ihB hc hV hnV (hlen.trans hBlen.symm))
    (ihT hc hV hnV (hlen.trans hRlen.symm))
    (ihE hc hV hnV (hlen.trans hRlen.symm))
| prim hnone =>
  simpa [substUnres] using HasType.prim (Gamma := Gammaout) hnone
| measure hs hQ hK ihQ ihK =>
  obtain <hQlen, hKlen> := hs.lengths
  simpa [substUnres] using
    HasType.measure hs (ihQ hc hV hnV (hlen.trans hQlen.symm))
    (ihK hc hV hnV (hlen.trans hKlen.symm))
| fix hadm hdup hnone hM ih =>
  simpa [substUnres] using
    HasType.fix hadm hdup hnone (ih hc hV hnV hlen)
| fold hadm hM ih =>
  simpa [substUnres] using HasType.fold hadm (ih hc hV hnV hlen)
| unfold hadm hM ih =>
  simpa [substUnres] using HasType.unfold hadm (ih hc hV hnV hlen)

```

### 2.4.115 The unrestricted substitution of zero preserves the structure

**Statement.** If  $M$  has type  $B$  under the unrestricted context  $A$  and the linear context  $\Delta$ ;  $V$  has type  $A$  under the unrestricted context  $\Gamma$  and the linear context  $\Delta_v$ ;  $\Delta_v$  is an empty usage mask; and  $\Delta_v.length = \Delta.length$ , then  $\text{substUnres } 0 \ V \ M$  has type  $B$  under the unrestricted context  $\Gamma$  and the linear context  $\Delta$ .

**Proof.** This is an instance of the capture-avoiding unrestricted substitution, applied to the definition of the zero, the hypothesis that  $M$  has type  $B$  under the unrestricted context  $A$  and the linear context  $\Delta$ , the hypothesis that  $V$  has type  $A$  under the unrestricted context  $\Gamma$  and the linear context  $\Delta_v$ , the hypothesis that  $\Delta_v$  is an empty usage mask and the hypothesis that  $\Delta_v.length = \Delta.length$ .

#### Lean 4 source `QLambda/Linear/Metatheory.lean`

```
theorem substUnres_zero_preserves {A B Gamma Delta Deltav M V}
  (hM : HasType (A :: Gamma) Delta M B)
  (hV : HasType Gamma Deltav V A) (hnV : AllNone Deltav)
  (hlen : Deltav.length = Delta.length) :
  HasType Gamma Delta (substUnres 0 V M) B :=
  substUnres_preserves .zero hM hV hnV hlen
```

### 2.4.116 The inductive definition of one-step reductions

**Definition.** The inductive family of one-step reductions.

**Construction.** Generated by the rules `betaL`, `betaU`, `appF`, `appX`, `iteTrue`, `iteFalse`, `iteC`, `unpairBeta`, `unpairC`, `pairL`, `pairR` and `unfoldBeta`. Every element arises from finitely many applications of these rules, so properties are proved by induction over them.

#### Lean 4 source `QLambda/Linear/Operational.lean`

```
inductive Step : Term -> Term -> Prop where
| betaL {A M V} : Value V -> Step (.lam .lin A M) V (substLin 0 V M)
| betaU {A M V} : Value V -> Step (.app (.lam .unres A M) V) (substUnres 0 V M)
| appF {F F' X} : Step F F' -> Step (.app F X) (.app F' X)
| appX {V X X'} : Value V -> Step X X' -> Step (.app V X) (.app V X')
| iteTrue {T E} : Step (.ite (.bitLit true) T E) T
| iteFalse {T E} : Step (.ite (.bitLit false) T E) E
| iteC {B B' T E} : Step B B' -> Step (.ite B T E) (.ite B' T E)
| unpairBeta {M N K} :
  Value M -> Value N ->
  Step (.unpair (.pair M N) K) (.app (.app K M) N)
| unpairC {M M' K} : Step M M' -> Step (.unpair M K) (.unpair M' K)
| pairL {M M' N} : Step M M' -> Step (.pair M N) (.pair M' N)
| pairR {V N N'} : Value V -> Step N N' -> Step (.pair V N) (.pair V N')
| unfoldBeta {A V} : Value V -> Step (.unfold (.fold A V)) V
| unfoldC {M M'} : Step M M' -> Step (.unfold M) (.unfold M')
| fixBeta {A V} : Value V -> Step (.fix A V) (.app V (.fix A V))
| fixC {A M M'} : Step M M' -> Step (.fix A M) (.fix A M')
| foldC {A M M'} : Step M M' -> Step (.fold A M) (.fold A M')
| measureC {Q Q' K} : Step Q Q' -> Step (.measure Q K) (.measure Q' K)
```

### 2.4.117 Measurement branches

**Definition.** Measurement branches.  $Q$  is returned with the bit, so the qubit is not discarded.

**Construction.** Generated by the rules `branch`. Every element arises from finitely many applications of these rules, so properties are proved by induction over them.

#### Lean 4 source `QLambda/Linear/Operational.lean`

```
inductive MeasStep : Term -> Bool -> Term -> Prop where
| branch {Q K b} :
  Value Q ->
  MeasStep (.measure Q K) b (.app (.app K (.bitLit b)) Q)
```

### 2.4.118 Preservation of typing under the one-step reduction

**Statement.** If  $M$  reduces in one step to  $N$  and  $M$  has type  $A$  under the unrestricted context  $\Gamma$  and the linear context  $\Delta$ , then  $N$  has type  $A$  under the unrestricted context  $\Gamma$  and the linear context  $\Delta$ .

**Proof.** By induction on the derivation that  $M$  reduces in one step to  $N$ . For a linear  $\beta$ -reduction, an unrestricted  $\beta$ -reduction, a true branch of a conditional, a false branch of a conditional, a pair elimination  $\beta$ -reduction, an unfolding  $\beta$ -reduction and a least fixed point  $\beta$ -reduction, the claim is checked directly; for a component  $f$ , a component  $x$ , a conditional classical, a pair elimination classical, a pair linear, a pair  $r$ , an unfolding classical, a least fixed point classical, a fold classical and a measurement classical, the claim follows from the induction hypothesis. The key step rewrites with the fact that empty right mask determines an ordered context split from the left, the fact that empty left mask determines an ordered context split from the right and the fact that the linear substitution of zero preserves the structure.

#### Lean 4 source `QLambda/Linear/Operational.lean`

```
theorem step_preservation {Gamma Delta M N A}
  (hs : Step M N) (ht : HasType Gamma Delta M A) :
  HasType Gamma Delta N A := by
  induction hs generalizing Gamma Delta A with
  | betaL hV =>
    cases ht with
    | appL hsplitt hF hX =>
      cases hF with
      | lamL _ hM => exact substLin_zero_preserves hsplitt hM hX
    | appU hsplitt hnone hF hX => cases hF
  | betaU hV =>
    cases ht with
    | appL hsplitt hF hX => cases hF
    | appU hsplitt hnoneX hF hX =>
      cases hF with
      | lamU _ _ hnoneF hM =>
        have hlen : _ := hsplitt.lengths.2.trans hsplitt.lengths.1.symm
        have hsub := substUnres_zero_preserves hM hX hnoneX hlen
        rw [hsplitt.eq_left_of_allNone_right hnoneX]
        exact hsub
  | appF hstep ih =>
    cases ht with
    | appL hsplitt hF hX =>
      exact HasType.appL hsplitt (ih hF) hX
    | appU hsplitt hnone hF hX =>
      exact HasType.appU hsplitt hnone (ih hF) hX
  | appX hV hstep ih =>
    cases ht with
```

```

| appL hsplit hF hX =>
  exact HasType.appL hsplit hF (ih hX)
| appU hsplit hnone hF hX =>
  exact HasType.appU hsplit hnone hF (ih hX)
| iteTrue =>
  cases ht with
  | ite hsplit hB hT hE =>
    cases hB with
    | bitLit hnone =>
      rw [hsplit.eq_right_of_allNone_left hnone]
      exact hT
| iteFalse =>
  cases ht with
  | ite hsplit hB hT hE =>
    cases hB with
    | bitLit hnone =>
      rw [hsplit.eq_right_of_allNone_left hnone]
      exact hE
| iteC hstep ih =>
  cases ht with
  | ite hsplit hB hT hE =>
    exact HasType.ite hsplit (ih hB) hT hE
| unpairBeta hM hN =>
  cases ht with
  | unpair houter hPair hK =>
    cases hPair with
    | pair hinner htM htN =>
      obtain <Deltakm, hkm, hout> := houter.rotate hinner
      exact HasType.appL hout
        (HasType.appL hkm hK htM) htN
| unpairC hstep ih =>
  cases ht with
  | unpair hsplit hM hK =>
    exact HasType.unpair hsplit (ih hM) hK
| pairL hstep ih =>
  cases ht with
  | pair hsplit hM hN =>
    exact HasType.pair hsplit (ih hM) hN
| pairR hV hstep ih =>
  cases ht with
  | pair hsplit hM hN =>
    exact HasType.pair hsplit hM (ih hN)
| unfoldBeta hV =>
  cases ht with
  | unfold _ hFold =>
    cases hFold with
    | fold _ hV => exact hV
| unfoldC hstep ih =>
  cases ht with
  | unfold hadm hM => exact HasType.unfold hadm (ih hM)
| fixBeta hV =>
  cases ht with
  | fix hadm hdup hnone hM =>
    exact HasType.appU (OSplit.self_of_allNone hnone) hnone hM
    (HasType.fix hadm hdup hnone hM)
| fixC hstep ih =>

```

```

      cases ht with
      | fix hadm hdup hnone hM =>
        exact HasType.fix hadm hdup hnone (ih hM)
    | foldC hstep ih =>
      cases ht with
      | fold hadm hM => exact HasType.fold hadm (ih hM)
    | measureC hstep ih =>
      cases ht with
      | measure hsplit hQ hK =>
        exact HasType.measure hsplit (ih hQ) hK

```

#### 2.4.119 Preservation of typing under the measurement step

**Statement.** If  $\text{MeasStep } M \ b \ N$  and  $M$  has type  $A$  under the unrestricted context  $\Gamma$  and the linear context  $\Delta$ , then  $N$  has type  $A$  under the unrestricted context  $\Gamma$  and the linear context  $\Delta$ .

**Proof.** By case analysis on the derivation that  $\text{MeasStep } M \ b \ N$ . For a branch, the claim is checked directly.

#### Lean 4 source `QLambda/Linear/Operational.lean`

```

theorem measStep_preservation {Gamma Delta M N A b}
  (hm : MeasStep M b N) (ht : HasType Gamma Delta M A) :
  HasType Gamma Delta N A := by
  cases hm with
  | @branch Q K b hV =>
    cases ht with
    | @measure Gamma_0 Delta_0 Delta_1 Delta_2 A_0 Q_0 K_0 hsplit hQ hK =>
      let Deltanone :=
        List.replicate Delta_2.length (Option.none : Option Ty)
      have hnone : AllNone Deltanone := allNone_replicate_none _
      have hbit : HasType Gamma Deltanone (.bitLit b) .bit :=
        HasType.bitLit hnone
      have hKbit :
        HasType Gamma _ (.app K (.bitLit b))
          (.arrow .lin .qubit A) :=
        HasType.appU (OSplit.withNoneRight _) hnone hK hbit
      exact HasType.appL hsplit.symm hKbit hQ

```

#### 2.4.120 A source evaluation context has reached a quantum primitive

**Definition.** A source evaluation context has reached a quantum primitive. The staging or machine layer, rather than classical  $\beta$ -reduction, handles this case.

**Construction.** Generated by the rules `primApp`, `measure`, `appF`, `appX`, `iteC`, `unpairC`, `pairL`, `pairR`, `unfoldC`, `fixC`, `foldC` and `measureC`. Every element arises from finitely many applications of these rules, so properties are proved by induction over them.

#### Lean 4 source `QLambda/Linear/Operational.lean`

```

inductive QuantumBlocked : Term -> Prop where
| primApp {p V} : Value V -> QuantumBlocked (.app (.prim p) V)
| measure {Q K} : Value Q -> QuantumBlocked (.measure Q K)
| appF {F X} : QuantumBlocked F -> QuantumBlocked (.app F X)

```

```

| appX {V X} : Value V -> QuantumBlocked X -> QuantumBlocked (.app V X)
| iteC {B T E} : QuantumBlocked B -> QuantumBlocked (.ite B T E)
| unpairC {M K} : QuantumBlocked M -> QuantumBlocked (.unpair M K)
| pairL {M N} : QuantumBlocked M -> QuantumBlocked (.pair M N)
| pairR {V N} : Value V -> QuantumBlocked N -> QuantumBlocked (.pair V N)
| unfoldC {M} : QuantumBlocked M -> QuantumBlocked (.unfold M)
| fixC {A M} : QuantumBlocked M -> QuantumBlocked (.fix A M)
| foldC {A M} : QuantumBlocked M -> QuantumBlocked (.fold A M)
| measureC {Q K} : QuantumBlocked Q -> QuantumBlocked (.measure Q K)

```

#### 2.4.121 Definition of the progress property

**Definition.** The progress property of  $M$  is a proposition-valued predicate, defined below.

**Construction.** Defined to be  $\text{Value } M \vee (\exists N, \text{Step } M N) \vee \text{QuantumBlocked } M$ .

**Lean 4 source** `QLambda/Linear/Operational.lean`

```

def MakesProgress (M : Term) : Prop :=
  Value M \/\ (exists N, Step M N) \/\ QuantumBlocked M

```

#### 2.4.122 Ordered context split of the empty list

**Statement.** If  $[]$  splits into the left part  $\Delta_1$  and the right part  $\Delta_2$ , then  $\Delta_1 = []$  and  $\Delta_2 = []$ .

**Proof.** By case analysis on the derivation that  $[]$  splits into the left part  $\Delta_1$  and the right part  $\Delta_2$ .

**Lean 4 source** `QLambda/Linear/Operational.lean`

```

private theorem oSplit_nil {Delta_1 Delta_2}
  (h : OSplit [] Delta_1 Delta_2) : Delta_1 = [] /\ Delta_2 = [] := by
  cases h
  exact <rfl, rfl>

```

#### 2.4.123 Shape of the value of the function type

**Statement.** If  $\text{Value } V$  and  $V$  has type  $\text{.arrow } \kappa \ A \ B$  under the unrestricted context  $\Gamma$  and the linear context  $\Delta$ , then  $(\exists C \ M, V = \text{.lam } \kappa \ C \ M) \vee \exists p, V \text{ equals the primitive of } p$ .

**Proof.** By case analysis on the derivation that  $\text{Value } V$ . The cases of a unit, a bit literal, a pair and a fold cannot occur, since it contradicts the hypothesis that  $V$  has type  $\text{.arrow } \kappa \ A \ B$  under the unrestricted context  $\Gamma$  and the linear context  $\Delta$ ; for a lambda abstraction and a primitive, the claim is checked directly.

**Lean 4 source** `QLambda/Linear/Operational.lean`

```

private theorem value_arrow_shape {Gamma Delta V ? A B}
  (hV : Value V) (hT : HasType Gamma Delta V (.arrow ? A B)) :
  (exists C M, V = .lam ? C M) \/\ exists p, V = .prim p := by
  cases hV with
| unit => cases hT
| bitLit => cases hT
| lam =>
  cases hT <;> exact Or.inl <_, _, rfl>

```

```

| pair _ _ => cases hT
| prim => exact Or.inr <_, rfl>
| fold _ => cases hT

```

#### 2.4.124 Shape of the value of the bit

**Statement.** If `Value V` and `V` has type `.bit` under the unrestricted context  $\Gamma$  and the linear context  $\Delta$ , then  $\exists b, V$  equals the bit literal of `b`.

**Proof.** By case analysis on the derivation that `Value V`. The cases of a unit, a lambda abstraction, a pair and a fold cannot occur, since it contradicts the hypothesis that `V` has type `.bit` under the unrestricted context  $\Gamma$  and the linear context  $\Delta$ ; for a bit literal and a primitive, the claim is checked directly.

#### Lean 4 source `QLambda/Linear/Operational.lean`

```

private theorem value_bit_shape {Gamma Delta V}
  (hV : Value V) (hT : HasType Gamma Delta V .bit) :
  exists b, V = .bitLit b := by
  cases hV with
  | unit => cases hT
  | bitLit => exact <_, rfl>
  | lam => cases hT
  | pair _ _ => cases hT
  | prim =>
    cases ?Prim? <;> cases hT
  | fold _ => cases hT

```

#### 2.4.125 Shape of the value of a tensor product

**Statement.** If `Value V` and `V` has type `.tensor A B` under the unrestricted context  $\Gamma$  and the linear context  $\Delta$ , then there is `M, N` such that `V = .pair M N, Value M` and `Value N`.

**Proof.** By case analysis on the derivation that `Value V`. The cases of a unit, a bit literal, a lambda abstraction and a fold cannot occur, since it contradicts the hypothesis that `V` has type `.tensor A B` under the unrestricted context  $\Gamma$  and the linear context  $\Delta$ ; for a pair and a primitive, the claim is checked directly.

#### Lean 4 source `QLambda/Linear/Operational.lean`

```

private theorem value_tensor_shape {Gamma Delta V A B}
  (hV : Value V) (hT : HasType Gamma Delta V (.tensor A B)) :
  exists M N, V = .pair M N /\ Value M /\ Value N := by
  cases hV with
  | unit => cases hT
  | bitLit => cases hT
  | lam => cases hT
  | pair hM hN => exact <_, _, rfl, hM, hN>
  | prim =>
    cases ?Prim? <;> cases hT
  | fold _ => cases hT

```

### 2.4.126 Shape of the value of the recursive type

**Statement.** If `Value V` and `V` has type `.mu A` under the unrestricted context  $\Gamma$  and the linear context  $\Delta$ , then there is `M` such that `V = .fold A M` and `Value M`.

**Proof.** By case analysis on the derivation that `Value V`. The cases of a unit, a bit literal, a lambda abstraction and a pair cannot occur, since it contradicts the hypothesis that `V` has type `.mu A` under the unrestricted context  $\Gamma$  and the linear context  $\Delta$ ; for a primitive and a fold, the claim is checked directly.

#### Lean 4 source `QLambda/Linear/Operational.lean`

```
private theorem value_mu_shape {Gamma Delta V A}
  (hV : Value V) (hT : HasType Gamma Delta V (.mu A)) :
  exists M, V = .fold A M /\ Value M := by
  cases hV with
  | unit => cases hT
  | bitLit => cases hT
  | lam => cases hT
  | pair _ _ => cases hT
  | prim =>
    cases ?Prim? <;> cases hT
  | fold hM =>
    cases hT
    exact <_, rfl, hM>
```

### 2.4.127 Value of the absence of a reduction step

**Statement.** For terms `V, N`: if `Value V` and `V` reduces in one step to `N`, then a contradiction.

**Proof.** By induction on the derivation that `V` reduces in one step to `N`. The cases of a linear  $\beta$ -reduction, an unrestricted  $\beta$ -reduction, a component `f`, a component `x`, a true branch of a conditional, a false branch of a conditional, a conditional classical, a pair elimination  $\beta$ -reduction, a pair elimination classical, an unfolding  $\beta$ -reduction, an unfolding classical, a least fixed point  $\beta$ -reduction, a least fixed point classical and a measurement classical cannot occur, since it contradicts the hypothesis that `Value V`; for a pair linear, a pair `r` and a fold classical, the claim follows from the induction hypothesis.

#### Lean 4 source `QLambda/Linear/Operational.lean`

```
theorem value_nostep {V N : Term} (hV : Value V) (hS : Step V N) : False := by
  induction hS with
  | betaL _ => cases hV
  | betaU _ => cases hV
  | appF _ _ => cases hV
  | appX _ _ _ => cases hV
  | iteTrue => cases hV
  | iteFalse => cases hV
  | iteC _ _ => cases hV
  | unpairBeta _ _ => cases hV
  | unpairC _ _ => cases hV
  | pairL _ ih =>
    cases hV with
    | pair hM _ => exact ih hM
  | pairR _ _ ih =>
    cases hV with
    | pair _ hN => exact ih hN
```



```

| unfoldBeta _ => cases hV
| unfoldC _ _ => cases hV
| fixBeta _ => cases hV
| fixC _ _ => cases hV
| foldC _ ih =>
  cases hV with
  | fold hM => exact ih hM
| measureC _ _ => cases hV

```

#### 2.4.128 One-step reduction is deterministic

**Statement.** For terms  $M, N_1, N_2$ : if  $M$  reduces in one step to  $N_1$  and  $M$  reduces in one step to  $N_2$ , then  $N_1 = N_2$ .

**Proof.** By induction on the derivation that  $M$  reduces in one step to  $N_1$ . For a linear  $\beta$ -reduction, an unrestricted  $\beta$ -reduction, a true branch of a conditional, a false branch of a conditional, a pair elimination  $\beta$ -reduction, an unfolding  $\beta$ -reduction and a least fixed point  $\beta$ -reduction, the claim is checked directly; for a component  $f$ , a component  $x$ , a conditional classical, a pair elimination classical, a pair linear, a pair  $r$ , an unfolding classical, a least fixed point classical, a fold classical and a measurement classical, the claim follows from the induction hypothesis. The goal is simplified using the value of the absence of a reduction step.

#### Lean 4 source `QLambda/Linear/Operational.lean`

```

theorem step_deterministic {M N_1 N_2 : Term} (h_1 : Step M N_1) (h_2 : Step M N_2) :
  N_1 = N_2 := by
  induction h_1 generalizing N_2 with
  | betaL hV =>
    cases h_2 with
    | betaL _ => rfl
    | appF hF => exact (value_nostep Value.lam hF).elim
    | appX _ hX => exact (value_nostep hV hX).elim
  | betaU hV =>
    cases h_2 with
    | betaU _ => rfl
    | appF hF => exact (value_nostep Value.lam hF).elim
    | appX _ hX => exact (value_nostep hV hX).elim
  | appF hF ih =>
    cases h_2 with
    | betaL _ => exact (value_nostep Value.lam hF).elim
    | betaU _ => exact (value_nostep Value.lam hF).elim
    | appF hF' =>
      have := ih hF'
      simp [this]
    | appX hVF _ => exact (value_nostep hVF hF).elim
  | appX hV hX ih =>
    cases h_2 with
    | betaL hArg => exact (value_nostep hArg hX).elim
    | betaU hArg => exact (value_nostep hArg hX).elim
    | appF hF => exact (value_nostep hV hF).elim
    | appX _ hX' =>
      have := ih hX'
      simp [this]
  | iteTrue =>

```

```

      cases h_2 with
      | iteTrue => rfl
      | iteC hB => cases hB
| iteFalse =>
  cases h_2 with
  | iteFalse => rfl
  | iteC hB => cases hB
| iteC hB ih =>
  cases h_2 with
  | iteTrue => cases hB
  | iteFalse => cases hB
  | iteC hB' =>
    have := ih hB'
    simp [this]
| unpairBeta hM hN =>
  cases h_2 with
  | unpairBeta _ _ => rfl
  | unpairC hP =>
    cases hP with
    | pairL hL => exact (value_nostep hM hL).elim
    | pairR _ hR => exact (value_nostep hN hR).elim
| unpairC hM ih =>
  cases h_2 with
  | unpairBeta hV_1 hV_2 =>
    cases hM with
    | pairL hL => exact (value_nostep hV_1 hL).elim
    | pairR _ hR => exact (value_nostep hV_2 hR).elim
  | unpairC hM' =>
    have := ih hM'
    simp [this]
| pairL hM ih =>
  cases h_2 with
  | pairL hM' =>
    have := ih hM'
    simp [this]
  | pairR hV _ => exact (value_nostep hV hM).elim
| pairR hV hN ih =>
  cases h_2 with
  | pairL hM => exact (value_nostep hV hM).elim
  | pairR _ hN' =>
    have := ih hN'
    simp [this]
| unfoldBeta hV =>
  cases h_2 with
  | unfoldBeta _ => rfl
  | unfoldC hM =>
    cases hM with
    | foldC hF => exact (value_nostep hV hF).elim
| unfoldC hM ih =>
  cases h_2 with
  | unfoldBeta hV =>
    cases hM with
    | foldC hF => exact (value_nostep hV hF).elim
  | unfoldC hM' =>
    have := ih hM'
    simp [this]

```

```

| fixBeta hV =>
  cases h_2 with
  | fixBeta _ => rfl
  | fixC hM => exact (value_nostep hV hM).elim
| fixC hM ih =>
  cases h_2 with
  | fixBeta hV => exact (value_nostep hV hM).elim
  | fixC hM' =>
    have := ih hM'
    simp [this]
| foldC hM ih =>
  cases h_2 with
  | foldC hM' =>
    have := ih hM'
    simp [this]
| measureC hQ ih =>
  cases h_2 with
  | measureC hQ' =>
    have := ih hQ'
    simp [this]

```

#### 2.4.129 Closed well-typed terms are values

**Statement.** Closed well-typed terms are values, take a deterministic classical step, or have reached the explicitly separated quantum staging boundary. Formally: `MakesProgress M`.

**Proof.** By induction on `hT`. For an unrestricted variable, a linear variable, an unrestricted lambda abstraction, a linear lambda abstraction, a unit, a bit literal and a primitive, the claim is checked directly; for a linear application, an unrestricted application, a pair, a pair elimination, a conditional, a measurement, a least fixed point, a fold and an unfolding, the claim follows from the induction hypothesis.

#### Lean 4 source `QLambda/Linear/Operational.lean`

```

theorem progress {M : Term} {A : Ty} (h : HasType [] [] M A) :
  MakesProgress M := by
  have go : forall {Gamma Delta M A}, HasType Gamma Delta M A -> Gamma = [] ->
    Delta = [] ->
    MakesProgress M := by
    intro Gamma Delta M A hT hGamma hDelta
    induction hT with
    | varU hlookup _ _ =>
      rw [hGamma] at hlookup
      cases hlookup
    | varL hlookup _ =>
      rw [hDelta] at hlookup
      cases hlookup
    | lamU _ _ _ _ => exact Or.inl Value.lam
    | lamL _ _ => exact Or.inl Value.lam
    | appL hsplit hF hX ihF ihX =>
      rw [hDelta] at hsplit
      obtain <rfl, rfl> := oSplit_nil hsplit
      rcases ihF hGamma rfl with hVF | <<NF, hSF> | hQF>
      * rcases ihX hGamma rfl with hVX | <<NX, hSX> | hQX>
      * rcases value_arrow_shape hVF hF with hLam | hPrim
      * obtain <C, Body, rfl> := hLam

```

```

    exact Or.inr (Or.inl <_, Step.betaL hVX>)
  * obtain <p, rfl> := hPrim
    exact Or.inr (Or.inr (QuantumBlocked.primApp hVX))
  * exact Or.inr (Or.inl <_, Step.appX hVF hSX>)
  * exact Or.inr (Or.inr (QuantumBlocked.appX hVF hQX))
  * exact Or.inr (Or.inl <_, Step.appF hSF>)
  * exact Or.inr (Or.inr (QuantumBlocked.appF hQF))
| appU hsplitt _ hF hX ihF ihX =>
  rw [hDelta] at hsplitt
  obtain <rfl, rfl> := oSplit_nil hsplitt
  rcases ihF hGamma rfl with hVF | <<NF, hSF> | hQF>
  * rcases ihX hGamma rfl with hVX | <<NX, hSX> | hQX>
  * rcases value_arrow_shape hVF hF with hLam | hPrim
    * obtain <C, Body, rfl> := hLam
      exact Or.inr (Or.inl <_, Step.betaU hVX>)
    * obtain <p, rfl> := hPrim
      exact Or.inr (Or.inr (QuantumBlocked.primApp hVX))
  * exact Or.inr (Or.inl <_, Step.appX hVF hSX>)
  * exact Or.inr (Or.inr (QuantumBlocked.appX hVF hQX))
  * exact Or.inr (Or.inl <_, Step.appF hSF>)
  * exact Or.inr (Or.inr (QuantumBlocked.appF hQF))
| unit _ => exact Or.inl Value.unit
| bitLit _ => exact Or.inl Value.bitLit
| pair hsplitt hM hN ihM ihN =>
  rw [hDelta] at hsplitt
  obtain <rfl, rfl> := oSplit_nil hsplitt
  rcases ihM hGamma rfl with hVM | <<NM, hSM> | hQM>
  * rcases ihN hGamma rfl with hVN | <<NN, hSN> | hQN>
  * exact Or.inl (Value.pair hVM hVN)
  * exact Or.inr (Or.inl <_, Step.pairR hVM hSN>)
  * exact Or.inr (Or.inr (QuantumBlocked.pairR hVM hQN))
  * exact Or.inr (Or.inl <_, Step.pairL hSM>)
  * exact Or.inr (Or.inr (QuantumBlocked.pairL hQM))
| unpair hsplitt hM _ ihM _ =>
  rw [hDelta] at hsplitt
  obtain <rfl, rfl> := oSplit_nil hsplitt
  rcases ihM hGamma rfl with hVM | <<NM, hSM> | hQM>
  * obtain <V, W, rfl, hV, hW> := value_tensor_shape hVM hM
    exact Or.inr (Or.inl <_, Step.unpairBeta hV hW>)
  * exact Or.inr (Or.inl <_, Step.unpairC hSM>)
  * exact Or.inr (Or.inr (QuantumBlocked.unpairC hQM))
| ite hsplitt hB _ _ ihB _ _ =>
  rw [hDelta] at hsplitt
  obtain <rfl, rfl> := oSplit_nil hsplitt
  rcases ihB hGamma rfl with hVB | <<NB, hSB> | hQB>
  * obtain <b, rfl> := value_bit_shape hVB hB
    cases b
    * exact Or.inr (Or.inl <_, Step.iteFalse>)
    * exact Or.inr (Or.inl <_, Step.iteTrue>)
  * exact Or.inr (Or.inl <_, Step.iteC hSB>)
  * exact Or.inr (Or.inr (QuantumBlocked.iteC hQB))
| prim _ => exact Or.inl Value.prim
| measure hsplitt hQ _ ihQ _ =>
  rw [hDelta] at hsplitt
  obtain <rfl, rfl> := oSplit_nil hsplitt
  rcases ihQ hGamma rfl with hVQ | <<NQ, hSQ> | hBQ>

```

```

    * exact Or.inr (Or.inr (QuantumBlocked.measure hVQ))
    * exact Or.inr (Or.inl <_, Step.measureC hSQ>)
    * exact Or.inr (Or.inr (QuantumBlocked.measureC hBQ))
  | fix _ _ _ ih =>
    rcases ih hGamma hDelta with hV | <<N, hS> | hQ>
    * exact Or.inr (Or.inl <_, Step.fixBeta hV>)
    * exact Or.inr (Or.inl <_, Step.fixC hS>)
    * exact Or.inr (Or.inr (QuantumBlocked.fixC hQ))
  | fold _ _ ih =>
    rcases ih hGamma hDelta with hV | <<N, hS> | hQ>
    * exact Or.inl (Value.fold hV)
    * exact Or.inr (Or.inl <_, Step.foldC hS>)
    * exact Or.inr (Or.inr (QuantumBlocked.foldC hQ))
  | unfold _ hM ih =>
    rcases ih hGamma hDelta with hV | <<N, hS> | hQ>
    * obtain <V, rfl, hV'> := value_mu_shape hV hM
      exact Or.inr (Or.inl <_, Step.unfoldBeta hV'>)
    * exact Or.inr (Or.inl <_, Step.unfoldC hS>)
    * exact Or.inr (Or.inr (QuantumBlocked.unfoldC hQ))
exact go h rfl rfl

```

#### 2.4.130 A well-typed identity at gate type reduces on the H constant

**Statement.** A well-typed identity at gate type reduces on the H constant. Formally: `Step (.app id Gate (.prim .h)) (.prim .h)`.

**Proof.** The goal is simplified using the definition of the identity gate.

##### Lean 4 source `QLambda/Linear/Operational.lean`

```

theorem idGate_apply_h : Step (.app idGate (.prim .h)) (.prim .h) := by
  have hsub : substLin 0 (.prim .h) (.var .lin 0) = .prim .h :=
    substLin_zero_noLin rfl
  simpa [idGate, hsub] using
    (Step.betaL Value.prim :
      Step
        (.app
          (.lam .lin (.arrow .lin .qubit .qubit) (.var .lin 0))
          (.prim .h))
        (substLin 0 (.prim .h) (.var .lin 0)))

```

#### 2.4.131 Action of the identity gate on the Hadamard gate and a well-typedness

**Statement.** `.app idGate (.prim .h)` has type `.arrow .lin .qubit .qubit` under the unrestricted context `[]` and the linear context `[]`.

**Proof.** It follows from the soundness of the type inference.

##### Lean 4 source `QLambda/Linear/Operational.lean`

```

theorem idGate_apply_h_typed :
  HasType [] [] (.app idGate (.prim .h)) (.arrow .lin .qubit .qubit) := by
  have h :
    infer [] [] (.app idGate (.prim .h)) =

```

```

    some (.arrow .lin .qubit .qubit, []) := by
      rfl
    exact (infer_sound h).1

```

### 2.4.132 Both de Bruijn namespaces are locally scoped

**Definition.** Both de Bruijn namespaces are locally scoped.

**Construction.** Defined by cases on the input: `.var .lin i`  $\mapsto$  the  $i$  of  $<$  and the linear depth; `.var .unres i`  $\mapsto$  the  $i$  of  $<$  and the unrestricted depth; `.lam .lin _ M`  $\mapsto$  the well-scopedness of the sum of the linear depth and 1, the unrestricted depth,  $M$ ; `.lam .unres _ M`  $\mapsto$  the well-scopedness of the linear depth, the sum of the unrestricted depth and 1,  $M$ ; `.app F X`  $\mapsto$  `Scoped linearDepth unresDepth F  $\wedge$  Scoped linearDepth unresDepth X`; `.unit`  $\mapsto$  `True`; `.bitLit _`  $\mapsto$  `True`; `.pair M N`  $\mapsto$  `Scoped linearDepth unresDepth M  $\wedge$  Scoped linearDepth unresDepth N`; and so on for the remaining cases.

#### Lean 4 source `QLambda/Linear/Substitution.lean`

```

def Scoped (linearDepth unresDepth : Nat) : Term -> Prop
| .var .lin i => i < linearDepth
| .var .unres i => i < unresDepth
| .lam .lin _ M => Scoped (linearDepth + 1) unresDepth M
| .lam .unres _ M => Scoped linearDepth (unresDepth + 1) M
| .app F X => Scoped linearDepth unresDepth F /\ Scoped linearDepth unresDepth X
| .unit => True
| .bitLit _ => True
| .pair M N => Scoped linearDepth unresDepth M /\ Scoped linearDepth unresDepth N
| .unpair M K => Scoped linearDepth unresDepth M /\ Scoped linearDepth unresDepth K
| .ite B T E =>
  Scoped linearDepth unresDepth B /\
  Scoped linearDepth unresDepth T /\ Scoped linearDepth unresDepth E
| .prim _ => True
| .measure Q K => Scoped linearDepth unresDepth Q /\ Scoped linearDepth unresDepth K
| .fix _ M => Scoped linearDepth unresDepth M
| .fold _ M => Scoped linearDepth unresDepth M
| .unfold M => Scoped linearDepth unresDepth M

```

### 2.4.133 Definition of the linear de Bruijn shift of terms

**Definition.** The linear de Bruijn shift of  $d$  and cutoff is a function of type `Term  $\rightarrow$  Term`.

**Construction.** Defined by cases on the input: `.var .lin i`  $\mapsto$  the variable of a linear and if  $i < \text{cutoff}$  then  $i$  else  $i + d$ ; `.var .unres i`  $\mapsto$  the variable of an unrestricted and  $i$ ; `.lam .lin A M`  $\mapsto$  the lambda abstraction of a linear,  $A$ , the linear de Bruijn shift of  $d$ ,  $\text{cutoff} + 1, M$ ; `.lam .unres A M`  $\mapsto$  the lambda abstraction of an unrestricted,  $A$ , the linear de Bruijn shift of  $d$ ,  $\text{cutoff}, M$ ; `.app F X`  $\mapsto$  the application of the linear de Bruijn shift of  $d$ ,  $\text{cutoff}, F$  and the linear de Bruijn shift of  $d$ ,  $\text{cutoff}, X$ ; `.unit`  $\mapsto$  the unit; `.bitLit b`  $\mapsto$  the bit literal of  $b$ ; `.pair M N`  $\mapsto$  the pair of the linear de Bruijn shift of  $d$ ,  $\text{cutoff}, M$  and the linear de Bruijn shift of  $d$ ,  $\text{cutoff}, N$ ; and so on for the remaining cases.

### Lean 4 source `QLambda/Linear/Substitution.lean`

```
def shiftLin (d cutoff : Nat) : Term -> Term
| .var .lin i => .var .lin (if i < cutoff then i else i + d)
| .var .unres i => .var .unres i
| .lam .lin A M => .lam .lin A (shiftLin d (cutoff + 1) M)
| .lam .unres A M => .lam .unres A (shiftLin d cutoff M)
| .app F X => .app (shiftLin d cutoff F) (shiftLin d cutoff X)
| .unit => .unit
| .bitLit b => .bitLit b
| .pair M N => .pair (shiftLin d cutoff M) (shiftLin d cutoff N)
| .unpair M K => .unpair (shiftLin d cutoff M) (shiftLin d cutoff K)
| .ite B T E =>
  .ite (shiftLin d cutoff B) (shiftLin d cutoff T) (shiftLin d cutoff E)
| .prim p => .prim p
| .measure Q K => .measure (shiftLin d cutoff Q) (shiftLin d cutoff K)
| .fix A M => .fix A (shiftLin d cutoff M)
| .fold A M => .fold A (shiftLin d cutoff M)
| .unfold M => .unfold (shiftLin d cutoff M)
```

#### 2.4.134 Definition of the unrestricted de Bruijn shift of terms

**Definition.** The unrestricted de Bruijn shift of  $d$  and  $cutoff$  is a function of type  $Term \rightarrow Term$ .

**Construction.** Defined by cases on the input:  $.var .unres i \mapsto$  the variable of an unrestricted and if  $i < cutoff$  then  $i$  else  $i + d$ ;  $.var .lin i \mapsto$  the variable of a linear and  $i$ ;  $.lam .unres A M \mapsto$  the lambda abstraction of an unrestricted,  $A$ , the unrestricted de Bruijn shift of  $d$ ,  $cutoff + 1$ ,  $M$ ;  $.lam .lin A M \mapsto$  the lambda abstraction of a linear,  $A$ , the unrestricted de Bruijn shift of  $d$ ,  $cutoff$ ,  $M$ ;  $.app F X \mapsto$  the application of the unrestricted de Bruijn shift of  $d$ ,  $cutoff$ ,  $F$  and the unrestricted de Bruijn shift of  $d$ ,  $cutoff$ ,  $X$ ;  $.unit \mapsto$  the unit;  $.bitLit b \mapsto$  the bit literal of  $b$ ;  $.pair M N \mapsto$  the pair of the unrestricted de Bruijn shift of  $d$ ,  $cutoff$ ,  $M$  and the unrestricted de Bruijn shift of  $d$ ,  $cutoff$ ,  $N$ ; and so on for the remaining cases.

### Lean 4 source `QLambda/Linear/Substitution.lean`

```
def shiftUnres (d cutoff : Nat) : Term -> Term
| .var .unres i => .var .unres (if i < cutoff then i else i + d)
| .var .lin i => .var .lin i
| .lam .unres A M => .lam .unres A (shiftUnres d (cutoff + 1) M)
| .lam .lin A M => .lam .lin A (shiftUnres d cutoff M)
| .app F X => .app (shiftUnres d cutoff F) (shiftUnres d cutoff X)
| .unit => .unit
| .bitLit b => .bitLit b
| .pair M N => .pair (shiftUnres d cutoff M) (shiftUnres d cutoff N)
| .unpair M K => .unpair (shiftUnres d cutoff M) (shiftUnres d cutoff K)
| .ite B T E =>
  .ite (shiftUnres d cutoff B) (shiftUnres d cutoff T) (shiftUnres d cutoff E)
| .prim p => .prim p
| .measure Q K => .measure (shiftUnres d cutoff Q) (shiftUnres d cutoff K)
| .fix A M => .fix A (shiftUnres d cutoff M)
| .fold A M => .fold A (shiftUnres d cutoff M)
| .unfold M => .unfold (shiftUnres d cutoff M)
```

### 2.4.135 Definition of the linear lifting of terms

**Definition.** The linear lifting is introduced by the definition below.

**Construction.** Defined to be the linear de Bruijn shift at 1.

**Lean 4 source** `QLambda/Linear/Substitution.lean`

```
abbrev liftLin := shiftLin 1
```

### 2.4.136 Definition of the unrestricted lifting of terms

**Definition.** The unrestricted lifting is introduced by the definition below.

**Construction.** Defined to be the unrestricted de Bruijn shift at 1.

**Lean 4 source** `QLambda/Linear/Substitution.lean`

```
abbrev liftUnres := shiftUnres 1
```

### 2.4.137 The linear de Bruijn shift respects well-scopedness

**Statement.** For natural numbers  $d, l, u$ , a term  $M$ : if  $\text{Scoped } l \ u \ M$ , then the linear de Bruijn shift of  $d, l, M$  equals  $M$ .

**Proof.** By induction on the term  $M$ . For a variable, the claim is checked directly; for a lambda abstraction, an application, a pair, a pair elimination, a conditional, a measurement, a least fixed point, a fold and an unfolding, the claim follows from the induction hypothesis; the cases of a unit, a bit literal and a primitive are immediate. The goal is simplified using the definition of the linear de Bruijn shift, the hypothesis that  $\text{Scoped } l \ u \ M$  and the definition of the well-scopedness.

**Lean 4 source** `QLambda/Linear/Substitution.lean`

```
theorem shiftLin_eq_of_scoped {d l u : Nat} {M : Term}
  (h : Scoped l u M) : shiftLin d l M = M := by
  induction M generalizing l u with
  | var ? i =>
    cases ? with
    | lin =>
      change i < l at h
      simp [shiftLin, h]
    | unres => rfl
  | lam ? A M ih =>
    cases ? with
    | lin => simp [Scoped] at h; simp [shiftLin, ih h]
    | unres => simp [Scoped] at h; simp [shiftLin, ih h]
  | app F X ihF ihX =>
    rcases h with <hF, hX>
    simp [shiftLin, ihF hF, ihX hX]
  | unit => rfl
  | bitLit _ => rfl
  | pair M N ihM ihN =>
    rcases h with <hM, hN>
    simp [shiftLin, ihM hM, ihN hN]
  | unpair M K ihM ihK =>
```



```

      rcases h with <hM, hK>
      simp [shiftLin, ihM hM, ihK hK]
| ite B T E ihB ihT ihE =>
      rcases h with <hB, hT, hE>
      simp [shiftLin, ihB hB, ihT hT, ihE hE]
| prim _ => rfl
| measure Q K ihQ ihK =>
      rcases h with <hQ, hK>
      simp [shiftLin, ihQ hQ, ihK hK]
| fix A M ih => simp [Scoped] at h; simp [shiftLin, ih h]
| fold A M ih => simp [Scoped] at h; simp [shiftLin, ih h]
| unfold M ih => simp [Scoped] at h; simp [shiftLin, ih h]

```

### 2.4.138 The unrestricted de Bruijn shift respects well-scopedness

**Statement.** For natural numbers  $d, l, u$ , a term  $M$ : if  $\text{Scoped } l \ u \ M$ , then the unrestricted de Bruijn shift of  $d, u, M$  equals  $M$ .

**Proof.** By induction on the term  $M$ . For a variable, the claim is checked directly; for a lambda abstraction, an application, a pair, a pair elimination, a conditional, a measurement, a least fixed point, a fold and an unfolding, the claim follows from the induction hypothesis; the cases of a unit, a bit literal and a primitive are immediate. The goal is simplified using the definition of the unrestricted de Bruijn shift, the hypothesis that  $\text{Scoped } l \ u \ M$  and the definition of the well-scopedness.

#### Lean 4 source `QLambda/Linear/Substitution.lean`

```

theorem shiftUnres_eq_of_scoped {d l u : Nat} {M : Term}
  (h : Scoped l u M) : shiftUnres d u M = M := by
  induction M generalizing l u with
  | var ? i =>
      cases ? with
      | lin => rfl
      | unres =>
          change i < u at h
          simp [shiftUnres, h]
  | lam ? A M ih =>
      cases ? with
      | lin => simp [Scoped] at h; simp [shiftUnres, ih h]
      | unres => simp [Scoped] at h; simp [shiftUnres, ih h]
  | app F X ihF ihX =>
      rcases h with <hF, hX>
      simp [shiftUnres, ihF hF, ihX hX]
  | unit => rfl
  | bitLit _ => rfl
  | pair M N ihM ihN =>
      rcases h with <hM, hN>
      simp [shiftUnres, ihM hM, ihN hN]
  | unpair M K ihM ihK =>
      rcases h with <hM, hK>
      simp [shiftUnres, ihM hM, ihK hK]
  | ite B T E ihB ihT ihE =>
      rcases h with <hB, hT, hE>
      simp [shiftUnres, ihB hB, ihT hT, ihE hE]
  | prim _ => rfl

```

```

| measure Q K ihQ ihK =>
  rcases h with <hQ, hK>
  simp [shiftUnres, ihQ hQ, ihK hK]
| fix A M ih => simp [Scoped] at h; simp [shiftUnres, ih h]
| fold A M ih => simp [Scoped] at h; simp [shiftUnres, ih h]
| unfold M ih => simp [Scoped] at h; simp [shiftUnres, ih h]

```

### 2.4.139 Replace linear de Bruijn index k

**Definition.** Replace linear de Bruijn index k. Indices above k decrease.

**Construction.** Defined by cases on the input: `.var .lin i`  $\mapsto$  if  $i < k$  then `.var .lin i`; `.var .unres i`  $\mapsto$  the variable of an unrestricted and  $i$ ; `.lam .lin A M`  $\mapsto$  the lambda abstraction of a linear, A, the linear substitution of  $k + 1, v, M$ ; `.lam .unres A M`  $\mapsto$  the lambda abstraction of an unrestricted, A, the linear substitution of  $k, \text{shiftUnres } 1 \ 0 \ v, M$ ; `.app F X`  $\mapsto$  the application of the linear substitution of  $k, v, F$  and the linear substitution of  $k, v, X$ ; `.unit`  $\mapsto$  the unit; `.bitLit b`  $\mapsto$  the bit literal of  $b$ ; `.pair M N`  $\mapsto$  the pair of the linear substitution of  $k, v, M$  and the linear substitution of  $k, v, N$ ; and so on for the remaining cases.

#### Lean 4 source `QLambda/Linear/Substitution.lean`

```

def substLin (k : Nat) (v : Term) : Term -> Term
| .var .lin i =>
  if i < k then .var .lin i
  else if i = k then shiftLin k 0 v
  else .var .lin (i - 1)
| .var .unres i => .var .unres i
| .lam .lin A M => .lam .lin A (substLin (k + 1) v M)
| .lam .unres A M =>
  .lam .unres A (substLin k (shiftUnres 1 0 v) M)
| .app F X => .app (substLin k v F) (substLin k v X)
| .unit => .unit
| .bitLit b => .bitLit b
| .pair M N => .pair (substLin k v M) (substLin k v N)
| .unpair M K => .unpair (substLin k v M) (substLin k v K)
| .ite B T E => .ite (substLin k v B) (substLin k v T) (substLin k v E)
| .prim p => .prim p
| .measure Q K => .measure (substLin k v Q) (substLin k v K)
| .fix A M => .fix A (substLin k v M)
| .fold A M => .fold A (substLin k v M)
| .unfold M => .unfold (substLin k v M)

```

### 2.4.140 Replace unrestricted de Bruijn index k

**Definition.** Replace unrestricted de Bruijn index k.

**Construction.** Defined by cases on the input: `.var .unres i`  $\mapsto$  if  $i < k$  then `.var .unres i`; `.var .lin i`  $\mapsto$  the variable of a linear and  $i$ ; `.lam .unres A M`  $\mapsto$  the lambda abstraction of an unrestricted, A, the unrestricted substitution of  $k + 1, v, M$ ; `.lam .lin A M`  $\mapsto$  the lambda abstraction of a linear, A, the unrestricted substitution of  $k, \text{shiftLin } 1 \ 0 \ v, M$ ; `.app F X`  $\mapsto$  the application of the unrestricted substitution of  $k, v, F$  and the unrestricted substitution of  $k, v, X$ ; `.unit`  $\mapsto$  the unit; `.bitLit b`  $\mapsto$  the bit literal of  $b$ ; `.pair M N`  $\mapsto$  the pair of the unrestricted substitution of  $k, v, M$  and the unrestricted substitution of  $k, v, N$ ; and so on for the remaining cases.

$\mapsto$  the unit;  $\text{.bitLit } b \mapsto$  the bit literal of  $b$ ;  $\text{.pair } M \ N \mapsto$  the pair of the unrestricted substitution of  $k, v, M$  and the unrestricted substitution of  $k, v, N$ ; and so on for the remaining cases.

#### Lean 4 source `QLambda/Linear/Substitution.lean`

```
def substUnres (k : Nat) (v : Term) : Term -> Term
| .var .unres i =>
  if i < k then .var .unres i
  else if i = k then shiftUnres k 0 v
  else .var .unres (i - 1)
| .var .lin i => .var .lin i
| .lam .unres A M => .lam .unres A (substUnres (k + 1) v M)
| .lam .lin A M =>
  .lam .lin A (substUnres k (shiftLin 1 0 v) M)
| .app F X => .app (substUnres k v F) (substUnres k v X)
| .unit => .unit
| .bitLit b => .bitLit b
| .pair M N => .pair (substUnres k v M) (substUnres k v N)
| .unpair M K => .unpair (substUnres k v M) (substUnres k v K)
| .ite B T E => .ite (substUnres k v B) (substUnres k v T) (substUnres k v E)
| .prim p => .prim p
| .measure Q K => .measure (substUnres k v Q) (substUnres k v K)
| .fix A M => .fix A (substUnres k v M)
| .fold A M => .fold A (substUnres k v M)
| .unfold M => .unfold (substUnres k v M)
```

### 2.4.141 True when $M$ contains no linear variable

**Definition.** True when  $M$  contains no linear variable.

**Construction.** Defined by cases on the input:  $\text{.var .lin } \_ \mapsto$  false;  $\text{.var .unres } \_ \mapsto$  true;  $\text{.lam } \_ \_ M \mapsto$  the absence of free linear variables of  $M$ ;  $\text{.app } F \ X \mapsto$   $\text{noLin } F \ \&\& \ \text{noLin } X$ ;  $\text{.unit} \mapsto$  true;  $\text{.bitLit } \_ \mapsto$  true;  $\text{.pair } M \ N \mapsto$   $\text{noLin } M \ \&\& \ \text{noLin } N$ ;  $\text{.unpair } M \ K \mapsto$   $\text{noLin } M \ \&\& \ \text{noLin } K$ ; and so on for the remaining cases.

#### Lean 4 source `QLambda/Linear/Substitution.lean`

```
def noLin : Term -> Bool
| .var .lin _ => false
| .var .unres _ => true
| .lam _ _ M => noLin M
| .app F X => noLin F && noLin X
| .unit => true
| .bitLit _ => true
| .pair M N => noLin M && noLin N
| .unpair M K => noLin M && noLin K
| .ite B T E => noLin B && noLin T && noLin E
| .prim _ => true
| .measure Q K => noLin Q && noLin K
| .fix _ M => noLin M
| .fold _ M => noLin M
| .unfold M => noLin M
```

## 2.4.142 Linear de Bruijn shift of the absence of free linear variables for terms

**Statement.** For natural numbers  $d$ ,  $cutoff$ , a term  $M$ : if `noLin M` evaluates to true, then the linear de Bruijn shift of  $d$ ,  $cutoff$ ,  $M$  equals  $M$ .

**Proof.** By induction on the term  $M$ . For a variable, the claim is checked directly; for a lambda abstraction, an application, a pair, a pair elimination, a conditional, a measurement, a least fixed point, a fold and an unfolding, the claim follows from the induction hypothesis; the cases of a unit, a bit literal and a primitive are immediate. The goal is simplified using the definition of the absence of free linear variables, the definition of the linear de Bruijn shift and standard identities for Booleans.

### Lean 4 source `QLambda/Linear/Substitution.lean`

```
theorem shiftLin_noLin {d cutoff : Nat} {M : Term} (h : noLin M = true) :
  shiftLin d cutoff M = M := by
  induction M generalizing cutoff with
  | var ? i =>
    cases ? with
    | lin => simp [noLin] at h
    | unres => rfl
  | lam ? A M ih =>
    cases ? with
    | lin =>
      simp only [noLin] at h
      simp [shiftLin, ih h]
    | unres =>
      simp only [noLin] at h
      simp [shiftLin, ih h]
  | app F X ihF ihX =>
    simp only [noLin, Bool.and_eq_true] at h
    simp [shiftLin, ihF h.1, ihX h.2]
  | unit => rfl
  | bitLit _ => rfl
  | pair M N ihM ihN =>
    simp only [noLin, Bool.and_eq_true] at h
    simp [shiftLin, ihM h.1, ihN h.2]
  | unpair M K ihM ihK =>
    simp only [noLin, Bool.and_eq_true] at h
    simp [shiftLin, ihM h.1, ihK h.2]
  | ite B T E ihB ihT ihE =>
    simp only [noLin, Bool.and_eq_true] at h
    rcases h with <<hB, hT>, hE>
    simp [shiftLin, ihB hB, ihT hT, ihE hE]
  | prim _ => rfl
  | measure Q K ihQ ihK =>
    simp only [noLin, Bool.and_eq_true] at h
    simp [shiftLin, ihQ h.1, ihK h.2]
  | fix A M ih =>
    simp only [noLin] at h
    simp [shiftLin, ih h]
  | fold A M ih =>
    simp only [noLin] at h
    simp [shiftLin, ih h]
  | unfold M ih =>
    simp only [noLin] at h
    simp [shiftLin, ih h]
```

#### 2.4.143 Linear de Bruijn shift of zero for terms

**Statement.** For a natural number `cutoff`, a term `M`: the linear de Bruijn shift of `cutoff` and `M` at 0 equals `M`.

**Proof.** By induction on the term `M`. For a variable, the claim is checked directly; for a lambda abstraction, an application, a pair, a pair elimination, a conditional, a measurement, a least fixed point, a fold and an unfolding, the claim follows from the induction hypothesis; the cases of a unit, a bit literal and a primitive are immediate. The goal is simplified using the definition of the linear de Bruijn shift.

#### Lean 4 source `QLambda/Linear/Substitution.lean`

```
theorem shiftLin_zero (cutoff : Nat) (M : Term) : shiftLin 0 cutoff M = M := by
  induction M generalizing cutoff with
  | var ? i =>
    cases ? <;> simp [shiftLin]
  | lam ? A M ih =>
    cases ? <;> simp [shiftLin, ih]
  | app F X ihF ihX => simp [shiftLin, ihF, ihX]
  | unit => rfl
  | bitLit _ => rfl
  | pair M N ihM ihN => simp [shiftLin, ihM, ihN]
  | unpair M K ihM ihK => simp [shiftLin, ihM, ihK]
  | ite B T E ihB ihT ihE => simp [shiftLin, ihB, ihT, ihE]
  | prim _ => rfl
  | measure Q K ihQ ihK => simp [shiftLin, ihQ, ihK]
  | fix A M ih => simp [shiftLin, ih]
  | fold A M ih => simp [shiftLin, ih]
  | unfold M ih => simp [shiftLin, ih]
```

#### 2.4.144 Linear lifting of the absence of free linear variables for terms

**Statement.** For a natural number `k`, a term `M`: if `noLin M` evaluates to true, then the linear lifting of `k` and `M` equals `M`.

**Proof.** This is an instance of the linear de Bruijn shift of the absence of free linear variables for terms, applied to the hypothesis that `noLin M` evaluates to true.

#### Lean 4 source `QLambda/Linear/Substitution.lean`

```
theorem liftLin_noLin {k : Nat} {M : Term} (h : noLin M = true) :
  liftLin k M = M :=
  shiftLin_noLin h
```

#### 2.4.145 Linear substitution of zero of the absence of free linear variables for terms

**Statement.** For a term `v`: if `noLin v` evaluates to true, then the linear substitution of `v` and the variable of a linear at 0 at 0 equals `v`.

**Proof.** The goal is simplified using the definition of the linear substitution and the linear de Bruijn shift of zero for terms.

#### Lean 4 source `QLambda/Linear/Substitution.lean`

```

theorem substLin_zero_noLin {v : Term} (_h : noLin v = true) :
  substLin 0 v (.var .lin 0) = v := by
  simp [substLin, shiftLin_zero]

```

#### 2.4.146 The linear substitution avoids unrestricted and capture

**Statement.** The linear substitution of the variable of an unrestricted at 0 and the lambda abstraction of an unrestricted, a bit, `.var .lin 0` at 0 equals the lambda abstraction of an unrestricted, a bit, the variable of an unrestricted at 1.

**Proof.** By definition. Unfolding the linear substitution turns the left-hand side, the linear substitution of the variable of an unrestricted at 0 and the lambda abstraction of an unrestricted, a bit, `.var .lin 0` at 0, into the right-hand side, the lambda abstraction of an unrestricted, a bit, the variable of an unrestricted at 1; the two sides are the same term.

**Lean 4 source** [QLambda/Linear/Substitution.lean](#)

```

theorem substLin_avoids_unrestricted_capture :
  substLin 0 (.var .unres 0)
    (.lam .unres .bit (.var .lin 0)) =
    .lam .unres .bit (.var .unres 1) := by
  rfl

```

#### 2.4.147 The unrestricted substitution avoids linear and capture

**Statement.** The unrestricted substitution of the variable of a linear at 0 and the lambda abstraction of a linear, a qubit, `.var .unres 0` at 0 equals the lambda abstraction of a linear, a qubit, the variable of a linear at 1.

**Proof.** By definition. Unfolding the unrestricted substitution turns the left-hand side, the unrestricted substitution of the variable of a linear at 0 and the lambda abstraction of a linear, a qubit, `.var .unres 0` at 0, into the right-hand side, the lambda abstraction of a linear, a qubit, the variable of a linear at 1; the two sides are the same term.

**Lean 4 source** [QLambda/Linear/Substitution.lean](#)

```

theorem substUnres_avoids_linear_capture :
  substUnres 0 (.var .lin 0)
    (.lam .lin .qubit (.var .unres 0)) =
    .lam .lin .qubit (.var .lin 1) := by
  rfl

```

#### 2.4.148 `lin` is exactly-once use

**Definition.** `lin` is exactly-once use. `unres` is ordinary  $\lambda$ -calculus use.

**Construction.** Generated by the rules `lin` and `unres`. Every element arises from finitely many applications of these rules, so properties are proved by induction over them.

**Lean 4 source** [QLambda/Linear/Syntax.lean](#)

```

inductive Mode where
| lin
| unres
deriving DecidableEq, Repr

```

#### 2.4.149 Types

**Definition.** Types.  $\mu A$  binds de Bruijn type variable 0 in  $A$ .

**Construction.** Generated by the rules `var`, `unit`, `bit`, `qubit`, `tensor`, `arrow` and `mu`. Every element arises from finitely many applications of these rules, so properties are proved by induction over them.

**Lean 4 source** [QLambda/Linear/Syntax.lean](#)

```

inductive Ty where
| var : Nat -> Ty
| unit
| bit
| qubit
| tensor : Ty -> Ty -> Ty
| arrow : Mode -> Ty -> Ty -> Ty
| mu : Ty -> Ty
deriving DecidableEq, Repr

```

#### 2.4.150 Shift free type variables by $d$ at or above cutoff

**Definition.** Shift free type variables by  $d$  at or above cutoff.

**Construction.** Defined by cases on the input:  $\text{.var } i \mapsto$  the variable of  $i$  if  $i < \text{cutoff}$  then  $i$  else  $i + d$ ;  $\text{.unit} \mapsto$  the unit;  $\text{.bit} \mapsto$  the bit;  $\text{.qubit} \mapsto$  the qubit;  $\text{.tensor } A \ B \mapsto$  the tensor product of the shift of  $d$ , cutoff,  $A$  and the shift of  $d$ , cutoff,  $B$ ;  $\text{.arrow } \kappa \ A \ B \mapsto$  the function type of  $\kappa$ , the shift of  $d$ , cutoff,  $A$ , the shift of  $d$ , cutoff,  $B$ ;  $\text{.mu } A \mapsto$  the recursive type of the shift of  $d$ , cutoff + 1,  $A$ .

**Lean 4 source** [QLambda/Linear/Syntax.lean](#)

```

def shift (d cutoff : Nat) : Ty -> Ty
| .var i => .var (if i < cutoff then i else i + d)
| .unit => .unit
| .bit => .bit
| .qubit => .qubit
| .tensor A B => .tensor (shift d cutoff A) (shift d cutoff B)
| .arrow ? A B => .arrow ? (shift d cutoff A) (shift d cutoff B)
| .mu A => .mu (shift d (cutoff + 1) A)

```

#### 2.4.151 Lift free type variables at or above $n$ by one

**Definition.** Lift free type variables at or above  $n$  by one.

**Construction.** Defined to be the shift of  $n$  at 1.

**Lean 4 source** [QLambda/Linear/Syntax.lean](#)

```
abbrev lift (n : Nat) : Ty -> Ty :=
  shift 1 n
```

## 2.4.152 Substitute $\sigma$ for type variable $n$ , lowering variables above it

**Definition.** Substitute  $\sigma$  for type variable  $n$ , lowering variables above it.

**Construction.** Defined by cases on the input:  $\text{.var } i \mapsto \text{if } i < n \text{ then .var } i; \text{.unit} \mapsto \text{the unit}; \text{.bit} \mapsto \text{the bit}; \text{.qubit} \mapsto \text{the qubit}; \text{.tensor } A \ B \mapsto \text{the tensor product of the substitution of } n, \sigma, A \text{ and the substitution of } n, \sigma, B; \text{.arrow } \kappa \ A \ B \mapsto \text{the function type of } \kappa, \text{ the substitution of } n, \sigma, A, \text{ the substitution of } n, \sigma, B; \text{.mu } A \mapsto \text{the recursive type of the substitution of } n + 1, \sigma, A.$

**Lean 4 source** [QLambda/Linear/Syntax.lean](#)

```
def subst (n : Nat) (sigma : Ty) : Ty -> Ty
| .var i =>
  if i < n then .var i
  else if i = n then shift n 0 sigma
  else .var (i - 1)
| .unit => .unit
| .bit => .bit
| .qubit => .qubit
| .tensor A B => .tensor (subst n sigma A) (subst n sigma B)
| .arrow ? A B => .arrow ? (subst n sigma A) (subst n sigma B)
| .mu A => .mu (subst (n + 1) sigma A)
```

## 2.4.153 Definition of the unfolding recursive type

**Definition.** Unfold  $\mu\alpha. A$  once:  $A[\mu\alpha. A / \alpha]$ .

**Construction.** Defined to be the substitution of the recursive type of  $A$  and  $A$  at 0.

**Lean 4 source** [QLambda/Linear/Syntax.lean](#)

```
def unfoldMu (A : Ty) : Ty :=
  subst 0 (.mu A) A
```

## 2.4.154 The substitution avoids capture

**Statement.** The substitution of the variable at 0 and the recursive type of  $\text{.var } 1$  at 0 equals the recursive type of the variable at 1.

**Proof.** By definition. Unfolding the substitution turns the left-hand side, the substitution of the variable at 0 and the recursive type of  $\text{.var } 1$  at 0, into the right-hand side, the recursive type of the variable at 1; the two sides are the same term.

**Lean 4 source** [QLambda/Linear/Syntax.lean](#)

```
theorem subst_avoids_capture :
  subst 0 (.var 0) (.mu (.var 1)) = .mu (.var 1) := by
  rfl
```



#### 2.4.155 Duplicability relative to recursive type variables

**Definition.** Duplicability relative to recursive type variables. Free variables are conservatively nonduplicable; `mu` assumes its own recursive occurrence is duplicable and rejects any quantum component in the body.

**Construction.** Defined by cases on the input: `.var i`  $\mapsto \kappa[i]?$ .getD false; `.unit`  $\mapsto$  true; `.bit`  $\mapsto$  true; `.qubit`  $\mapsto$  false; `.tensor A B`  $\mapsto$  duplicableAt  $\kappa$  A && duplicableAt  $\kappa$  B; `.arrow .lin _ _`  $\mapsto$  false; `.arrow .unres _ _`  $\mapsto$  true; `.mu A`  $\mapsto$  the duplicability at a position of the true of `::` and  $\kappa$  and A.

**Lean 4 source** `QLambda/Linear/Syntax.lean`

```
def duplicableAt (? : List Bool) : Ty -> Bool
| .var i => ?[i]?.getD false
| .unit => true
| .bit => true
| .qubit => false
| .tensor A B => duplicableAt ? A && duplicableAt ? B
| .arrow .lin _ _ => false
| .arrow .unres _ _ => true
| .mu A => duplicableAt (true :: ?) A
```

#### 2.4.156 Closed types whose values may be copied and discarded

**Definition.** Closed types whose values may be copied and discarded. An unrestricted function is duplicable because its typing rule forbids a linear capture. A linear function is not duplicable in general.

**Construction.** Defined to be the duplicability at a position of `[]`.

**Lean 4 source** `QLambda/Linear/Syntax.lean`

```
def duplicable : Ty -> Bool :=
  duplicableAt []
```

#### 2.4.157 The inductive definition of first-order types

**Definition.** Types which may cross the staging boundary into a first-order circuit and which currently have representable presheaf objects.

**Construction.** Generated by the rules `unit`, `bit`, `qubit` and `tensor`. Every element arises from finitely many applications of these rules, so properties are proved by induction over them.

**Lean 4 source** `QLambda/Linear/Syntax.lean`

```
inductive FirstOrder : Ty -> Prop where
| unit : FirstOrder .unit
| bit : FirstOrder .bit
| qubit : FirstOrder .qubit
| tensor {A B} : FirstOrder A -> FirstOrder B -> FirstOrder (.tensor A B)
```

### 2.4.158 Definition of the Boolean first-order check of types

**Definition.** The Boolean first-order check is a function of type  $\text{Ty} \rightarrow \text{Bool}$ .

**Construction.** Defined by cases on the input:  $\text{.unit} \mid \text{.bit} \mid \text{.qubit} \mapsto \text{true}$ ;  $\text{.tensor } A \mapsto \text{firstOrderB } A \ \&\& \ \text{firstOrderB } B$ ;  $\_ \mapsto \text{false}$ .

**Lean 4 source** [QLambda/Linear/Syntax.lean](#)

```
def firstOrderB : Ty → Bool
| .unit | .bit | .qubit => true
| .tensor A B => firstOrderB A && firstOrderB B
| _ => false
```

### 2.4.159 Formula for the Boolean first-order check

**Statement.** For a type  $A$ : if  $A$  is a first-order type, then the Boolean first-order check of  $A$  equals  $\text{true}$ .

**Proof.** By induction on the derivation that  $A$  is a first-order type. The cases of a unit, a bit and a qubit are immediate; for a tensor product, the claim follows from the induction hypothesis. The goal is simplified using the definition of the Boolean first-order check.

**Lean 4 source** [QLambda/Linear/Syntax.lean](#)

```
theorem firstOrderB_eq {A : Ty} (h : FirstOrder A) : A.firstOrderB = true := by
  induction h with
  | unit => rfl
  | bit => rfl
  | qubit => rfl
  | tensor hA hB ihA ihB => simp [firstOrderB, ihA, ihB]
```

### 2.4.160 Soundness of the Boolean first-order check

**Statement.** For a type  $A$ : if  $A.\text{firstOrderB}$  evaluates to  $\text{true}$ , then  $A$  is a first-order type.

**Proof.** By induction on the type  $A$ . The cases of a unit, a bit and a qubit are immediate; for a tensor product, the claim follows from the induction hypothesis; the cases of a variable, a function type and a recursive type cannot occur, since it contradicts the hypothesis that  $A.\text{firstOrderB}$  evaluates to  $\text{true}$ . The goal is simplified using the definition of the Boolean first-order check and standard identities for Booleans.

**Lean 4 source** [QLambda/Linear/Syntax.lean](#)

```
theorem firstOrderB_sound {A : Ty} (h : A.firstOrderB = true) :
  FirstOrder A := by
  induction A with
  | unit => exact .unit
  | bit => exact .bit
  | qubit => exact .qubit
  | tensor A B ihA ihB =>
    simp only [firstOrderB, Bool.and_eq_true] at h
    exact .tensor (ihA h.1) (ihB h.2)
  | var n => simp [firstOrderB] at h
  | arrow ? A B => simp [firstOrderB] at h
  | mu A => simp [firstOrderB] at h
```

### 2.4.161 Hilbert dimension of a first-order type

**Definition.** Hilbert dimension of a first-order type. Arrows and recursive types are mapped to 0 and are not used as objects. Bits and qubits are both two-dimensional; their later additive versus linear distinction is not recorded here.

**Construction.** Defined by cases on the input:  $\text{.unit} \mapsto 1$ ;  $\text{.bit} \mid \text{.qubit} \mapsto 2$ ;  $\text{.tensor } A \ B \mapsto$  the product of the hilbert dimension of  $A$  and the hilbert dimension of  $B$ ;  $\_ \mapsto 0$ .

**Lean 4 source** [QLambda/Linear/Syntax.lean](#)

```
def hilbertDim : Ty -> Nat
| .unit => 1
| .bit | .qubit => 2
| .tensor A B => A.hilbertDim * B.hilbertDim
| _ => 0
```

### 2.4.162 Definition of the dimension of first-order types

**Definition.** The dimension is a natural number.

**Construction.** Defined to be the hilbert dimension of  $A$ .

**Lean 4 source** [QLambda/Linear/Syntax.lean](#)

```
def FirstOrder.dimension {A : Ty} (_h : FirstOrder A) : Nat :=
  A.hilbertDim
```

### 2.4.163 Dimension of a unit

**Statement.** The dimension of a unit equals 1. Formally:  $\text{FirstOrder.dimension .unit} = 1$ .

**Proof.** By definition. Unfolding the dimension turns the left-hand side, the dimension of a unit, into the right-hand side, 1; the two sides are the same term.

**Lean 4 source** [QLambda/Linear/Syntax.lean](#)

```
theorem FirstOrder.dimension_unit : FirstOrder.dimension .unit = 1 :=
  rfl
```

### 2.4.164 Dimension of a bit

**Statement.** The dimension of a bit equals 2. Formally:  $\text{FirstOrder.dimension .bit} = 2$ .

**Proof.** By definition. Unfolding the dimension turns the left-hand side, the dimension of a bit, into the right-hand side, 2; the two sides are the same term.

**Lean 4 source** [QLambda/Linear/Syntax.lean](#)

```
theorem FirstOrder.dimension_bit : FirstOrder.dimension .bit = 2 :=
  rfl
```

### 2.4.165 Dimension of a qubit

**Statement.** The dimension of a qubit equals 2. Formally: `FirstOrder.dimension .qubit = 2`.

**Proof.** By definition. Unfolding the dimension turns the left-hand side, the dimension of a qubit, into the right-hand side, 2; the two sides are the same term.

**Lean 4 source** `QLambda/Linear/Syntax.lean`

```
theorem FirstOrder.dimension_qubit : FirstOrder.dimension .qubit = 2 :=
  rfl
```

### 2.4.166 Dimension of a tensor product

**Statement.** For types A, B: if A is a first-order type and B is a first-order type, then the dimension of the tensor product of hA and hB equals the product of the dimension of hA and the dimension of hB.

**Proof.** By definition. Unfolding the dimension turns the left-hand side, the dimension of the tensor product of hA and hB, into the right-hand side, the product of the dimension of hA and the dimension of hB; the two sides are the same term.

**Lean 4 source** `QLambda/Linear/Syntax.lean`

```
theorem FirstOrder.dimension_tensor {A B : Ty}
  (hA : FirstOrder A) (hB : FirstOrder B) :
  FirstOrder.dimension (.tensor hA hB) =
    hA.dimension * hB.dimension :=
  rfl
```

### 2.4.167 Gate and allocation constants

**Definition.** Gate and allocation constants. Measurement is its own elimination form.

**Construction.** Generated by the rules `new0` (fresh-qubit allocation), `x` (the Pauli-X gate), `h` (the Hadamard gate), `t` (the T gate), `ry` (a Y-rotation), `cx` (the controlled-NOT gate) and `reset` (reset). Every element arises from finitely many applications of these rules, so properties are proved by induction over them.

**Lean 4 source** `QLambda/Linear/Syntax.lean`

```
inductive Prim where
| new0
| x
| h
| t
| ry : ? -> Prim
| cx
| reset
deriving DecidableEq, Repr
```

### 2.4.168 Type of a primitive as a linear function

**Definition.** Type of a primitive as a linear function.

**Construction.** Defined by cases on the input: `.new0`  $\mapsto$  the function type of a linear, a unit, a qubit; `.x`  $\mapsto$  the function type of a linear, a qubit, a qubit; `.h`  $\mapsto$  the function type of a linear, a qubit, a qubit; `.t`  $\mapsto$  the function type of a linear, a qubit, a qubit; `.ry _`  $\mapsto$  the function type of a linear, a qubit, a qubit; `.cx`  $\mapsto$  the function type of a linear, a qubit, the function type of a linear, a qubit, `.tensor .qubit .qubit`; `.reset`  $\mapsto$  the function type of a linear, a qubit, a qubit.

**Lean 4 source** `QLambda/Linear/Syntax.lean`

```
def primTy : Prim -> Ty
| .new0 => .arrow .lin .unit .qubit
| .x => .arrow .lin .qubit .qubit
| .h => .arrow .lin .qubit .qubit
| .t => .arrow .lin .qubit .qubit
| .ry _ => .arrow .lin .qubit .qubit
| .cx => .arrow .lin .qubit (.arrow .lin .qubit (.tensor .qubit .qubit))
| .reset => .arrow .lin .qubit .qubit
```

### 2.4.169 Annotated terms

**Definition.** Annotated terms. Variable indices are de Bruijn indices in the context of their mode.

**Construction.** Generated by the rules `var`, `lam`, `app`, `unit`, `bitLit`, `pair`, `unpair`, `ite`, `prim`, `measure`, `fix` and `fold`. Every element arises from finitely many applications of these rules, so properties are proved by induction over them.

**Lean 4 source** `QLambda/Linear/Syntax.lean`

```
inductive Term where
| var : Mode -> Nat -> Term
| lam : Mode -> Ty -> Term -> Term
| app : Term -> Term -> Term
| unit
| bitLit : Bool -> Term
| pair : Term -> Term -> Term
| unpair : Term -> Term -> Term
| ite : Term -> Term -> Term -> Term
| prim : Prim -> Term
| measure : Term -> Term -> Term
| fix : Ty -> Term -> Term
| fold : Ty -> Term -> Term
| unfold : Term -> Term
deriving DecidableEq, Repr
```

### 2.4.170 Source values for call-by-value

**Definition.** Source values for call-by-value. Qubits are not closed values; they are wires.

**Construction.** Generated by the rules `unit`, `bitLit`, `lam`, `pair`, `prim` and `fold`. Every element arises from finitely many applications of these rules, so properties are proved by induction over them.

### Lean 4 source `QLambda/Linear/Syntax.lean`

```
inductive Value : Term -> Prop where
| unit : Value .unit
| bitLit {b} : Value (.bitLit b)
| lam {? A M} : Value (.lam ? A M)
| pair {M N} : Value M -> Value N -> Value (.pair M N)
| prim {p} : Value (.prim p)
| fold {A M} : Value M -> Value (.fold A M)
```

#### 2.4.171 Proof-level scoping judgment for type variables

**Definition.** Proof-level scoping judgment for type variables.

**Construction.** Defined by cases on the input:  $n, \_ .\text{var } i \mapsto \text{the } i \text{ of } < \text{ and } n$ ;  $\_, \_ .\text{unit} \mapsto \text{True}$ ;  $\_, \_ .\text{bit} \mapsto \text{True}$ ;  $\_, \_ .\text{qubit} \mapsto \text{True}$ ;  $n, \_ .\text{tensor } A \ B \mapsto \text{WellScopedAt } n \ A \wedge \text{WellScopedAt } n \ B$ ;  $n, \_ .\text{arrow } \_ \ A \ B \mapsto \text{WellScopedAt } n \ A \wedge \text{WellScopedAt } n \ B$ ;  $n, \_ .\text{mu } A \mapsto \text{the well-scopedness of the sum of } n \text{ and } 1 \text{ and } A$ .

### Lean 4 source `QLambda/Linear/TypeFormation.lean`

```
def WellScopedAt : Nat -> Ty -> Prop
| n, .var i => i < n
| _, .unit => True
| _, .bit => True
| _, .qubit => True
| n, .tensor A B => WellScopedAt n A /\ WellScopedAt n B
| n, .arrow _ A B => WellScopedAt n A /\ WellScopedAt n B
| n, .mu A => WellScopedAt (n + 1) A
```

#### 2.4.172 Executable checker for well-scopedness

**Definition.** Executable checker for `WellScopedAt`.

**Construction.** Defined by cases on the input:  $n, \_ .\text{var } i \mapsto \text{the decide of the } i \text{ of } < \text{ and } n$ ;  $\_, \_ .\text{unit} \mapsto \text{true}$ ;  $\_, \_ .\text{bit} \mapsto \text{true}$ ;  $\_, \_ .\text{qubit} \mapsto \text{true}$ ;  $n, \_ .\text{tensor } A \ B \mapsto \text{wellScopedAt } n \ A \ \&\& \text{wellScopedAt } n \ B$ ;  $n, \_ .\text{arrow } \_ \ A \ B \mapsto \text{wellScopedAt } n \ A \ \&\& \text{wellScopedAt } n \ B$ ;  $n, \_ .\text{mu } A \mapsto \text{the well-scopedness of the sum of } n \text{ and } 1 \text{ and } A$ .

### Lean 4 source `QLambda/Linear/TypeFormation.lean`

```
def wellScopedAt : Nat -> Ty -> Bool
| n, .var i => decide (i < n)
| _, .unit => true
| _, .bit => true
| _, .qubit => true
| n, .tensor A B => wellScopedAt n A && wellScopedAt n B
| n, .arrow _ A B => wellScopedAt n A && wellScopedAt n B
| n, .mu A => wellScopedAt (n + 1) A
```

### 2.4.173 The Boolean well-scopedness check returns true exactly when the property holds

**Statement.** The well-scopedness of  $n$  and  $A$  equals  $\text{true} \leftrightarrow \text{WellScopedAt } n \ A$ .

**Proof.** By induction on  $A$ . For a variable, a unit, a bit and a qubit, the claim is checked directly; for a tensor product, a function type and a recursive type, the claim follows from the induction hypothesis. The goal is simplified using the definition of the well-scopedness.

**Lean 4 source** `QLambda/Linear/TypeFormation.lean`

```
theorem wellScopedAt_eq_true_iff {n A} :
  wellScopedAt n A = true <-> WellScopedAt n A := by
  induction A generalizing n with
  | var i => simp [wellScopedAt, WellScopedAt]
  | unit => simp [wellScopedAt, WellScopedAt]
  | bit => simp [wellScopedAt, WellScopedAt]
  | qubit => simp [wellScopedAt, WellScopedAt]
  | tensor A B ihA ihB =>
    simp [wellScopedAt, WellScopedAt, ihA, ihB]
  | arrow ? A B ihA ihB =>
    simp [wellScopedAt, WellScopedAt, ihA, ihB]
  | mu A ih =>
    simp [wellScopedAt, WellScopedAt, ih]
```

### 2.4.174 The type variable selected by target does not occur in the type

**Definition.** The type variable selected by target does not occur in the type.

**Construction.** Defined by cases on the input:  $\text{target}, \text{.var } i \mapsto \text{the } i \text{ of } \neq \text{ and } \text{target}; \_$ ,  $\text{.unit} \mapsto \text{True}$ ;  $\_$ ,  $\text{.bit} \mapsto \text{True}$ ;  $\_$ ,  $\text{.qubit} \mapsto \text{True}$ ;  $\text{target}, \text{.tensor } A \ B \mapsto \text{DoesNotContainAt target } A \wedge \text{DoesNotContainAt target } B$ ;  $\text{target}, \text{.arrow } \_ \ A \ B \mapsto \text{DoesNotContainAt target } A \wedge \text{DoesNotContainAt target } B$ ;  $\text{target}, \text{.mu } A \mapsto \text{the absence of the recursion variable of the sum of target and 1 and } A$ .

**Lean 4 source** `QLambda/Linear/TypeFormation.lean`

```
def DoesNotContainAt : Nat -> Ty -> Prop
| target, .var i => i != target
| _, .unit => True
| _, .bit => True
| _, .qubit => True
| target, .tensor A B =>
  DoesNotContainAt target A /\ DoesNotContainAt target B
| target, .arrow _ A B =>
  DoesNotContainAt target A /\ DoesNotContainAt target B
| target, .mu A => DoesNotContainAt (target + 1) A
```

### 2.4.175 Executable checker for absence of a selected recursive variable

**Definition.** Executable checker for absence of a selected recursive variable.

**Construction.** Defined by cases on the input:  $\text{target}, \text{.var } i \mapsto \text{the decide of the } i \text{ of } \neq \text{ and } \text{target}; \_$ ,  $\text{.unit} \mapsto \text{true}$ ;  $\_$ ,  $\text{.bit} \mapsto \text{true}$ ;  $\_$ ,  $\text{.qubit} \mapsto \text{true}$ ;  $\text{target}, \text{.tensor } A \ B \mapsto \text{doesNotContainAt target } A \ \&\& \text{doesNotContainAt target } B$ ;  $\text{target}, \text{.arrow } \_ \ A \ B \mapsto \text{doesNotContainAt target } A \ \&\& \text{doesNotContainAt target } B$ ;  $\text{target}, \text{.mu } A \mapsto \text{doesNotContainAt target } A \ \&\& \text{doesNotContainAt (target + 1) } A$ .

$\_ A B \mapsto \text{doesNotContainAt target A} \ \&\& \ \text{doesNotContainAt target B}; \text{target}, \_ .$   
 $\mu A \mapsto$  the absence of the recursion variable of the sum of target and 1 and A.

#### Lean 4 source `QLambda/Linear/TypeFormation.lean`

```
def doesNotContainAt : Nat -> Ty -> Bool
| target, .var i => decide (i != target)
| _, .unit => true
| _, .bit => true
| _, .qubit => true
| target, .tensor A B =>
  doesNotContainAt target A && doesNotContainAt target B
| target, .arrow _ A B =>
  doesNotContainAt target A && doesNotContainAt target B
| target, .mu A => doesNotContainAt (target + 1) A
```

### 2.4.176 The Boolean absence of the recursion variable check returns true exactly when the property holds

**Statement.** The absence of the recursion variable of target and A equals `true`  $\leftrightarrow$  `DoesNotContainAt target A`.

**Proof.** By induction on A. For a variable, a unit, a bit and a qubit, the claim is checked directly; for a tensor product, a function type and a recursive type, the claim follows from the induction hypothesis. The goal is simplified using the definition of the absence of the recursion variable.

#### Lean 4 source `QLambda/Linear/TypeFormation.lean`

```
theorem doesNotContainAt_eq_true_iff {target A} :
  doesNotContainAt target A = true <-> DoesNotContainAt target A := by
  induction A generalizing target with
  | var i => simp [doesNotContainAt, DoesNotContainAt]
  | unit => simp [doesNotContainAt, DoesNotContainAt]
  | bit => simp [doesNotContainAt, DoesNotContainAt]
  | qubit => simp [doesNotContainAt, DoesNotContainAt]
  | tensor A B ihA ihB =>
    simp [doesNotContainAt, DoesNotContainAt, ihA, ihB]
  | arrow ? A B ihA ihB =>
    simp [doesNotContainAt, DoesNotContainAt, ihA, ihB]
  | mu A ih =>
    simp [doesNotContainAt, DoesNotContainAt, ih]
```

### 2.4.177 Strict positivity of the selected recursive variable

**Definition.** Strict positivity of the selected recursive variable. The variable may occur in products and function codomains, but it must be absent from function domains. Entering another `mu` shifts the selected de Bruijn index.

**Construction.** Defined by cases on the input:  $\_, \text{.var } \_ \mapsto \text{True}; \_, \text{.unit} \mapsto \text{True}; \_, \text{.bit} \mapsto \text{True}; \_, \text{.qubit} \mapsto \text{True}; \text{target}, \text{.tensor } A B \mapsto \text{StrictlyPositiveAt target A} \wedge \text{StrictlyPositiveAt target B}; \text{target}, \text{.arrow } \_ A B \mapsto \text{DoesNotContainAt target A} \wedge \text{StrictlyPositiveAt target B}; \text{target}, \text{.mu } A \mapsto$  the strict positivity of the sum of target and 1 and A.



#### Lean 4 source `QLambda/Linear/TypeFormation.lean`

```
def StrictlyPositiveAt : Nat -> Ty -> Prop
| _, .var _ => True
| _, .unit => True
| _, .bit => True
| _, .qubit => True
| target, .tensor A B =>
  StrictlyPositiveAt target A /\ StrictlyPositiveAt target B
| target, .arrow _ A B =>
  DoesNotContainAt target A /\ StrictlyPositiveAt target B
| target, .mu A => StrictlyPositiveAt (target + 1) A
```

#### 2.4.178 Executable strict-positivity checker

**Definition.** Executable strict-positivity checker.

**Construction.** Defined by cases on the input:  $\_, .var \_ \mapsto \text{true}$ ;  $\_, .unit \mapsto \text{true}$ ;  $\_, .bit \mapsto \text{true}$ ;  $\_, .qubit \mapsto \text{true}$ ;  $\text{target}, .\text{tensor } A \ B \mapsto \text{strictlyPositiveAt target } A \ \&\& \ \text{strictlyPositiveAt target } B$ ;  $\text{target}, .\text{arrow } \_ \ A \ B \mapsto \text{doesNotContainAt target } A \ \&\& \ \text{strictlyPositiveAt target } B$ ;  $\text{target}, .\mu \ A \mapsto$  the strict positivity of the sum of target and 1 and A.

#### Lean 4 source `QLambda/Linear/TypeFormation.lean`

```
def strictlyPositiveAt : Nat -> Ty -> Bool
| _, .var _ => true
| _, .unit => true
| _, .bit => true
| _, .qubit => true
| target, .tensor A B =>
  strictlyPositiveAt target A && strictlyPositiveAt target B
| target, .arrow _ A B =>
  doesNotContainAt target A && strictlyPositiveAt target B
| target, .mu A => strictlyPositiveAt (target + 1) A
```

#### 2.4.179 The Boolean strict positivity check returns true exactly when the property holds

**Statement.** The strict positivity of target and A equals  $\text{true} \leftrightarrow \text{StrictlyPositiveAt target } A$ .

**Proof.** By induction on A. For a variable, a unit, a bit and a qubit, the claim is checked directly; for a tensor product, a function type and a recursive type, the claim follows from the induction hypothesis. The goal is simplified using the definition of the strict positivity.

#### Lean 4 source `QLambda/Linear/TypeFormation.lean`

```
theorem strictlyPositiveAt_eq_true_iff {target A} :
  strictlyPositiveAt target A = true <-> StrictlyPositiveAt target A := by
  induction A generalizing target with
  | var i => simp [strictlyPositiveAt, StrictlyPositiveAt]
  | unit => simp [strictlyPositiveAt, StrictlyPositiveAt]
  | bit => simp [strictlyPositiveAt, StrictlyPositiveAt]
```

```

| qubit => simp [strictlyPositiveAt, StrictlyPositiveAt]
| tensor A B ihA ihB =>
  simp [strictlyPositiveAt, StrictlyPositiveAt, ihA, ihB]
| arrow ? A B ihA ihB =>
  simp [strictlyPositiveAt, StrictlyPositiveAt,
    doesNotContainAt_eq_true_iff, ihB]
| mu A ih =>
  simp [strictlyPositiveAt, StrictlyPositiveAt, ih]

```

#### 2.4.180 Every recursive body in a type is strictly positive in its own binder

**Definition.** Every recursive body in a type is strictly positive in its own binder.

**Construction.** Defined by cases on the input:  $\text{.mu } A \mapsto \text{StrictlyPositiveAt } 0 \ A \wedge \text{PositiveRec } A$ ;  $\text{.var } \_ \mapsto \text{True}$ ;  $\text{.unit} \mapsto \text{True}$ ;  $\text{.bit} \mapsto \text{True}$ ;  $\text{.qubit} \mapsto \text{True}$ ;  $\text{.tensor } A \ B \mapsto \text{PositiveRec } A \wedge \text{PositiveRec } B$ ;  $\text{.arrow } \_ \ A \ B \mapsto \text{PositiveRec } A \wedge \text{PositiveRec } B$ .

**Lean 4 source** [QLambda/Linear/TypeFormation.lean](#)

```

def PositiveRec : Ty -> Prop
| .mu A => StrictlyPositiveAt 0 A /\ PositiveRec A
| .var _ => True
| .unit => True
| .bit => True
| .qubit => True
| .tensor A B => PositiveRec A /\ PositiveRec B
| .arrow _ A B => PositiveRec A /\ PositiveRec B

```

#### 2.4.181 Executable checker for positivity of all recursive binders

**Definition.** Executable checker for positivity of all recursive binders.

**Construction.** Defined by cases on the input:  $\text{.var } \_ \mapsto \text{true}$ ;  $\text{.unit} \mapsto \text{true}$ ;  $\text{.bit} \mapsto \text{true}$ ;  $\text{.qubit} \mapsto \text{true}$ ;  $\text{.tensor } A \ B \mapsto \text{positiveRec } A \ \&\& \ \text{positiveRec } B$ ;  $\text{.arrow } \_ \ A \ B \mapsto \text{positiveRec } A \ \&\& \ \text{positiveRec } B$ ;  $\text{.mu } A \mapsto \text{strictlyPositiveAt } 0 \ A \ \&\& \ \text{positiveRec } A$ .

**Lean 4 source** [QLambda/Linear/TypeFormation.lean](#)

```

def positiveRec : Ty -> Bool
| .var _ => true
| .unit => true
| .bit => true
| .qubit => true
| .tensor A B => positiveRec A && positiveRec B
| .arrow _ A B => positiveRec A && positiveRec B
| .mu A => strictlyPositiveAt 0 A && positiveRec A

```

#### 2.4.182 The Boolean positivity of recursion check returns true exactly when the property holds

**Statement.** The positivity of recursion of  $A$  equals the true of  $\leftrightarrow$ , the positivity of recursion,  $A$ .

**Proof.** By induction on A. For a variable, a unit, a bit and a qubit, the claim is checked directly; for a tensor product, a function type and a recursive type, the claim follows from the induction hypothesis. The goal is simplified using the definition of the positivity of recursion.

**Lean 4 source** [QLambda/Linear/TypeFormation.lean](#)

```
theorem positiveRec_eq_true_iff {A} :
  positiveRec A = true <-> PositiveRec A := by
  induction A with
  | var i => simp [positiveRec, PositiveRec]
  | unit => simp [positiveRec, PositiveRec]
  | bit => simp [positiveRec, PositiveRec]
  | qubit => simp [positiveRec, PositiveRec]
  | tensor A B ihA ihB => simp [positiveRec, PositiveRec, ihA, ihB]
  | arrow ? A B ihA ihB => simp [positiveRec, PositiveRec, ihA, ihB]
  | mu A ih =>
    simp [positiveRec, PositiveRec, strictlyPositiveAt_eq_true_iff, ih]
```

#### 2.4.183 A type is admissible at depth n when it is scoped there and every recursive body in it is strictly positive

**Definition.** A type is admissible at depth n when it is scoped there and every recursive body in it is strictly positive.

**Construction.** Defined to be `WellScopedAt n A ∧ PositiveRec A`.

**Lean 4 source** [QLambda/Linear/TypeFormation.lean](#)

```
def AdmissibleAt (n : Nat) (A : Ty) : Prop :=
  WellScopedAt n A /\ PositiveRec A
```

#### 2.4.184 Executable admissibility checker

**Definition.** Executable admissibility checker.

**Construction.** Defined to be `wellScopedAt n A && positiveRec A`.

**Lean 4 source** [QLambda/Linear/TypeFormation.lean](#)

```
def admissibleAt (n : Nat) (A : Ty) : Bool :=
  wellScopedAt n A && positiveRec A
```

#### 2.4.185 The Boolean admissibility at a position check returns true exactly when the property holds

**Statement.** The admissibility at a position of n and A equals `true`  $\leftrightarrow$  `AdmissibleAt n A`.

**Proof.** The goal is simplified using the definition of the admissibility at a position, the fact that the Boolean well-scopedness check returns true exactly when the property holds and the fact that the Boolean positivity of recursion check returns true exactly when the property holds.

**Lean 4 source** [QLambda/Linear/TypeFormation.lean](#)

```

theorem admissibleAt_eq_true_iff {n A} :
  admissibleAt n A = true <-> AdmissibleAt n A := by
  simp [admissibleAt, AdmissibleAt, wellScopedAt_eq_true_iff,
    positiveRec_eq_true_iff]

```

## 2.4.186 Closed, admissible types

**Definition.** Closed, admissible types.

**Construction.** Defined to be the admissibility at a position of A at 0.

**Lean 4 source** [QLambda/Linear/TypeFormation.lean](#)

```

abbrev Admissible (A : Ty) : Prop :=
  AdmissibleAt 0 A

```

## 2.4.187 Check whether a type is closed and admissible

**Definition.** Check whether a type is closed and admissible.

**Construction.** Defined to be the admissibility at a position of A at 0.

**Lean 4 source** [QLambda/Linear/TypeFormation.lean](#)

```

def admissible (A : Ty) : Bool :=
  admissibleAt 0 A

```

## 2.4.188 The Boolean admissibility check returns true exactly when the property holds

**Statement.** The admissibility of A equals the true of  $\leftrightarrow$ , Admissible, A.

**Proof.** This is an instance of the fact that the Boolean admissibility at a position check returns true exactly when the property holds.

**Lean 4 source** [QLambda/Linear/TypeFormation.lean](#)

```

theorem admissible_eq_true_iff {A} :
  admissible A = true <-> Admissible A :=
  admissibleAt_eq_true_iff

```

## 2.4.189 Proof-level counterpart of the executable duplicability checker

**Definition.** Proof-level counterpart of the executable duplicability checker.

**Construction.** Defined by cases on the input:  $\kappa$ ,  $\text{.var } i \mapsto \kappa[i]? = \text{some true}; \_, \text{.unit} \mapsto \text{True}; \_, \text{.bit} \mapsto \text{True}; \_, \text{.qubit} \mapsto \text{False}; \kappa, \text{.tensor } A \ B \mapsto \text{DuplicableAt } \kappa \ A \wedge \text{DuplicableAt } \kappa \ B; \_, \text{.arrow .lin } \_ \_ \mapsto \text{False}; \_, \text{.arrow .unres } \_ \_ \mapsto \text{True}; \kappa, \text{.mu } A \mapsto \text{the duplicability at a position of the true of } :: \text{ and } \kappa \text{ and } A$ .

**Lean 4 source** [QLambda/Linear/TypeFormation.lean](#)

```

def DuplicableAt : List Bool -> Ty -> Prop
| ?, .var i => ?[i]? = some true
| _, .unit => True
| _, .bit => True
| _, .qubit => False
| ?, .tensor A B => DuplicableAt ? A /\ DuplicableAt ? B
| _, .arrow .lin _ _ => False
| _, .arrow .unres _ _ => True
| ?, .mu A => DuplicableAt (true :: ?) A

```

#### 2.4.190 The Boolean duplicability at a position check returns true exactly when the property holds

**Statement.** The duplicability at a position of  $\kappa$  and  $A$  equals  $\text{true} \leftrightarrow \text{DuplicableAt } \kappa \ A$ .

**Proof.** By induction on  $A$ . For a variable, a unit, a bit, a qubit and a function type, the claim is checked directly; for a tensor product and a recursive type, the claim follows from the induction hypothesis. The goal is simplified using the definition of the duplicability at a position.

##### Lean 4 source `QLambda/Linear/TypeFormation.lean`

```

theorem duplicableAt_eq_true_iff {? A} :
  duplicableAt ? A = true <-> DuplicableAt ? A := by
  induction A generalizing ? with
  | var i =>
    simp only [duplicableAt, DuplicableAt]
    cases ?[i]? <|> simp
  | unit => simp [duplicableAt, DuplicableAt]
  | bit => simp [duplicableAt, DuplicableAt]
  | qubit => simp [duplicableAt, DuplicableAt]
  | tensor A B ihA ihB =>
    simp [duplicableAt, DuplicableAt, ihA, ihB]
  | arrow mode A B ihA ihB =>
    cases mode <|> simp [duplicableAt, DuplicableAt]
  | mu A ih =>
    simp [duplicableAt, DuplicableAt, ih]

```

#### 2.4.191 Closed types whose values may be copied and discarded, as a proposition

**Definition.** Closed types whose values may be copied and discarded, as a proposition.

**Construction.** Defined to be the duplicability at a position of  $[]$  and  $A$ .

##### Lean 4 source `QLambda/Linear/TypeFormation.lean`

```

abbrev Duplicable (A : Ty) : Prop :=
  DuplicableAt [] A

```

#### 2.4.192 The Boolean duplicability check returns true exactly when the property holds

**Statement.** The duplicability of  $A$  equals the true of  $\leftrightarrow, \text{Duplicable}, A$ .

**Proof.** This is an instance of the fact that the Boolean duplicability at a position check returns true exactly when the property holds.

## Lean 4 source `QLambda/Linear/TypeFormation.lean`

```
theorem duplicable_eq_true_iff {A} :  
  duplicable A = true <-> Duplicable A :=  
  duplicableAt_eq_true_iff
```

### 2.4.193 The inductive definition of typing judgements

**Definition.** The inductive family of typing judgements.

**Construction.** Generated by the rules `varU`, `varL`, `lamU`, `lamL`, `appL`, `appU`, `unit`, `bitLit`, `pair`, `unpair`, `ite` and `prim`. Every element arises from finitely many applications of these rules, so properties are proved by induction over them.

## Lean 4 source `QLambda/Linear/Typing.lean`

```
inductive HasType : List Ty -> List (Option Ty) -> Term -> Ty -> Prop where  
| varU {Gamma Delta n A} :  
  Lookup Gamma n A -> Ty.Duplicable A -> AllNone Delta ->  
  HasType Gamma Delta (.var .unres n) A  
| varL {Gamma Delta n A} :  
  Lookup Delta n (some A) -> OnlySomeAt Delta n -> HasType Gamma Delta (.var .  
  lin n) A  
| lamU {Gamma Delta A B M} :  
  Ty.Admissible A ->  
  Ty.Duplicable A ->  
  AllNone Delta ->  
  HasType (A :: Gamma) Delta M B ->  
  HasType Gamma Delta (.lam .unres A M) (.arrow .unres A B)  
| lamL {Gamma Delta A B M} :  
  Ty.Admissible A ->  
  HasType Gamma (some A :: Delta) M B ->  
  HasType Gamma Delta (.lam .lin A M) (.arrow .lin A B)  
| appL {Gamma Delta Delta_1 Delta_2 A B F X} :  
  OSplit Delta Delta_1 Delta_2 ->  
  HasType Gamma Delta_1 F (.arrow .lin A B) ->  
  HasType Gamma Delta_2 X A ->  
  HasType Gamma Delta (.app F X) B  
| appU {Gamma Delta DeltaF DeltaX A B F X} :  
  OSplit Delta DeltaF DeltaX ->  
  AllNone DeltaX ->  
  HasType Gamma DeltaF F (.arrow .unres A B) ->  
  HasType Gamma DeltaX X A ->  
  HasType Gamma Delta (.app F X) B  
| unit {Gamma Delta} : AllNone Delta -> HasType Gamma Delta .unit .unit  
| bitLit {Gamma Delta b} : AllNone Delta -> HasType Gamma Delta (.bitLit b) .bit  
| pair {Gamma Delta Delta_1 Delta_2 A B M N} :  
  OSplit Delta Delta_1 Delta_2 ->  
  HasType Gamma Delta_1 M A ->  
  HasType Gamma Delta_2 N B ->  
  HasType Gamma Delta (.pair M N) (.tensor A B)  
| unpair {Gamma Delta Delta_1 Delta_2 A B C M K} :  
  OSplit Delta Delta_1 Delta_2 ->  
  HasType Gamma Delta_1 M (.tensor A B) ->  
  HasType Gamma Delta_2 K (.arrow .lin A (.arrow .lin B C)) ->
```

```

    HasType Gamma Delta (.unpair M K) C
| ite {Gamma Delta Delta_1 Delta_2 A B T E} :
    OSplit Delta Delta_1 Delta_2 ->
    HasType Gamma Delta_1 B .bit ->
    HasType Gamma Delta_2 T A ->
    HasType Gamma Delta_2 E A ->
    HasType Gamma Delta (.ite B T E) A
| prim {Gamma Delta p} : AllNone Delta -> HasType Gamma Delta (.prim p) (primTy p)
| measure {Gamma Delta Delta_1 Delta_2 A Q K} :
    OSplit Delta Delta_1 Delta_2 ->
    HasType Gamma Delta_1 Q .qubit ->
    HasType Gamma Delta_2 K (.arrow .unres .bit (.arrow .lin .qubit A)) ->
    HasType Gamma Delta (.measure Q K) A
| fix {Gamma Delta A M} :
    Ty.Admissible A ->
    Ty.Duplicable A ->
    AllNone Delta ->
    HasType Gamma Delta M (.arrow .unres A A) ->
    HasType Gamma Delta (.fix A M) A
| fold {Gamma Delta A M} :
    Ty.Admissible (.mu A) ->
    HasType Gamma Delta M (Ty.subst 0 (.mu A) A) ->
    HasType Gamma Delta (.fold A M) (.mu A)
| unfold {Gamma Delta A M} :
    Ty.Admissible (.mu A) ->
    HasType Gamma Delta M (.mu A) ->
    HasType Gamma Delta (.unfold M) (Ty.subst 0 (.mu A) A)

```

## 2.4.194 Syntax-directed linear type checker

**Definition.** Syntax-directed linear type checker. The Boolean vector marks which variables of the supplied linear scope are used.

**Construction.** Defined by cases on the input:  $\text{.var .unres } n \mapsto \text{match } \Gamma[n]? \text{ with; some } A \mapsto \text{if Ty.duplicable } A = \text{true then; none} \mapsto \text{none; .var .lin } n \mapsto \text{match } \Delta[n]? \text{ with; some } A \mapsto \text{the present value } A, \text{ mark } n \Delta; \text{none} \mapsto \text{none; .lam .unres } A \text{ M} \mapsto \text{if Ty.admissible } A = \text{true} \wedge \text{Ty.duplicable } A = \text{true then; some } (B, u) \mapsto \text{if all False } u = \text{true then some } (\text{.arrow .unres } A \text{ B}, u) \text{ else none; and so on for the remaining cases.}$

### Lean 4 source `QLambda/Linear/Typing.lean`

```

def infer (Gamma Delta : List Ty) : Term -> Option (Ty x List Bool)
| .var .unres n =>
    match Gamma[n]? with
    | some A =>
        if Ty.duplicable A = true then
            some (A, List.replicate Delta.length false)
        else none
    | none => none
| .var .lin n =>
    match Delta[n]? with
    | some A => some (A, mark n Delta)
    | none => none

```

```

| .lam .unres A M =>
  if Ty.admissible A = true /\ Ty.duplicable A = true then
    match infer (A :: Gamma) Delta M with
    | some (B, u) =>
      if allFalse u = true then some (.arrow .unres A B, u) else none
    | none => none
  else none
| .lam .lin A M =>
  if Ty.admissible A = true then
    match infer Gamma (A :: Delta) M with
    | some (B, true :: u) => some (.arrow .lin A B, u)
    | _ => none
  else none
| .app F X =>
  match infer Gamma Delta F, infer Gamma Delta X with
  | some (.arrow ? A B, uF), some (A', uX) =>
    if A = A' then
      match ? with
      | .lin =>
        match zipOr uF uX with
        | some u => some (B, u)
        | none => none
      | .unres =>
        if allFalse uX = true then
          match zipOr uF uX with
          | some u => some (B, u)
          | none => none
        else none
    else none
  | _, _ => none
| .unit => some (.unit, List.replicate Delta.length false)
| .bitLit _ => some (.bit, List.replicate Delta.length false)
| .pair M N =>
  match infer Gamma Delta M, infer Gamma Delta N with
  | some (A, uM), some (B, uN) =>
    match zipOr uM uN with
    | some u => some (.tensor A B, u)
    | none => none
  | _, _ => none
| .unpair M K =>
  match infer Gamma Delta M, infer Gamma Delta K with
  | some (.tensor A B, uM), some (.arrow .lin A' (.arrow .lin B' C), uK) =>
    if A = A' /\ B = B' then
      match zipOr uM uK with
      | some u => some (C, u)
      | none => none
    else none
  | _, _ => none
| .ite B T E =>
  match infer Gamma Delta B, infer Gamma Delta T, infer Gamma Delta E with
  | some (.bit, uB), some (A, uT), some (A', uE) =>
    if A = A' /\ uT = uE then
      match zipOr uB uT with
      | some u => some (A, u)
      | none => none
    else none

```



```

| _, _, _ => none
| .prim p => some (primTy p, List.replicate Delta.length false)
| .measure Q K =>
  match infer Gamma Delta Q, infer Gamma Delta K with
  | some (.qubit, uQ), some (.arrow .unres .bit (.arrow .lin .qubit A), uK) =>
    match zipOr uQ uK with
    | some u => some (A, u)
    | none => none
  | _, _ => none
| .fix A M =>
  match infer Gamma Delta M with
  | some (.arrow .unres A_1 A_2, u) =>
    if Ty.admissible A = true /\ Ty.duplicable A = true /\
      A_1 = A /\ A_2 = A /\ allFalse u = true then
      some (A, u)
    else none
  | _ => none
| .fold A M =>
  match infer Gamma Delta M with
  | some (B, u) =>
    if Ty.admissible (.mu A) = true /\ B = Ty.subst 0 (.mu A) A then
      some (.mu A, u)
    else none
  | none => none
| .unfold M =>
  match infer Gamma Delta M with
  | some (.mu A, u) =>
    if Ty.admissible (.mu A) = true then
      some (Ty.subst 0 (.mu A) A, u)
    else none
  | _ => none

```

## 2.4.195 Soundness of the type inference

**Statement.** For unrestricted contexts  $\Gamma$ ,  $\Delta$ , a term  $M$ , a type  $A$ : if  $\text{infer } \Gamma \Delta M = \text{some } (A, u)$ , then  $\text{HasType } \Gamma \text{ (usageCtx } \Delta \text{ u) } M A \wedge u.\text{length equals the length of } \Delta$ .

**Proof.** By induction on the term  $M$ . For a variable, a unit, a bit literal and a primitive, the claim is checked directly; for a lambda abstraction, an application, a pair, a pair elimination, a conditional, a measurement, a least fixed point, a fold and an unfolding, the claim follows from the induction hypothesis. The key step rewrites with the definition of the type inference and standard identities for lists.

### Lean 4 source `QLambda/Linear/Typing.lean`

```

theorem infer_sound {Gamma Delta : List Ty} {M : Term} {A : Ty} {u : List Bool}
  (h : infer Gamma Delta M = some (A, u)) :
  HasType Gamma (usageCtx Delta u) M A /\ u.length = Delta.length := by
  induction M generalizing Gamma Delta A u with
  | var ? n =>
    cases ? with
    | unres =>
      simp only [infer] at h
      cases hGamma : Gamma[n]? with
      | none => simp [hGamma] at h
      | some A' =>

```

```

      simp [hGamma] at h
      obtain <hdup, rfl, rfl> := h
      exact <HasType.varU (lookup_of_get? hGamma)
        (Ty.duplicable_eq_true_iff.mp hdup) (allNone_unused Delta),
        by simp [List.length_replicate]>
| lin =>
  simp only [infer] at h
  cases hDelta : Delta[n]? with
  | none => simp [hDelta] at h
  | some A' =>
    simp [hDelta] at h
    obtain <rfl, rfl> := h
    obtain <hlook, honly> := varLin_usage hDelta
    exact <HasType.varL hlook honly, mark_length n Delta>
| lam ? B M ih =>
  cases ? with
  | unres =>
    simp only [infer] at h
    cases hM : infer (B :: Gamma) Delta M with
    | none => simp [hM] at h
    | some p =>
      obtain <C, uC> := p
      simp [hM] at h
      obtain <hform, hnone, rfl, rfl> := h
      rcases hform with <hadm, hdup>
      obtain <hC, hlen> := ih hM
      exact <HasType.lamU (Ty.admissible_eq_true_iff.mp hadm)
        (Ty.duplicable_eq_true_iff.mp hdup)
        (allNone_of_allFalse hlen hnone) hC, hlen>
| lin =>
  simp only [infer] at h
  by_cases hadm : Ty.admissible B = true
  * rw [ite_eq_left hadm] at h
  cases hM : infer Gamma (B :: Delta) M with
  | none => simp [hM] at h
  | some p =>
    obtain <C, uC> := p
    cases uC with
    | nil => simp [hM] at h
    | cons head tail =>
      cases head with
      | false => simp [hM] at h
      | true =>
        simp [hM] at h
        obtain <rfl, rfl> := h
        obtain <hC, hlen> := ih hM
        have hlen' : tail.length = Delta.length := by
          simp [List.length_cons] using hlen
        exact <HasType.lamL (Ty.admissible_eq_true_iff.mp hadm) hC,
          hlen'>
  * rw [ite_eq_right hadm] at h
  simp at h
| app F X ihF ihX =>
  simp only [infer] at h
  cases hF : infer Gamma Delta F with
  | none => simp [hF] at h

```

```

| some pF =>
  obtain <TF, uF> := pF
  cases hX : infer Gamma Delta X with
  | none => simp [hF, hX] at h
  | some pX =>
    obtain <TX, uX> := pX
    simp [hF, hX] at h
    cases TF with
    | var _ => simp at h
    | unit => simp at h
    | bit => simp at h
    | qubit => simp at h
    | tensor _ _ => simp at h
    | mu _ => simp at h
    | arrow ? A_0 B_0 =>
      dsimp at h
      by_cases hA : A_0 = TX
      * subst hA
      rw [ite_eq_left rfl] at h
      cases ? with
      | lin =>
        cases hzip : zipOr uF uX with
        | none => simp [hzip] at h
        | some u' =>
          simp [hzip] at h
          obtain <rfl, rfl> := h
          obtain <hFty, hFlen> := ihF hF
          obtain <hXty, hXlen> := ihX hX
          have hsplit := oSplit_of_zipOr hzip hFlen hXlen
          obtain <hlen, _> := zipOr_length hzip
          exact <HasType.appL hsplit hFty hXty, hlen.trans hFlen>
      | unres =>
        by_cases hnone : allFalse uX = true
        * rw [ite_eq_left hnone] at h
        cases hzip : zipOr uF uX with
        | none => simp [hzip] at h
        | some u' =>
          simp [hzip] at h
          obtain <rfl, rfl> := h
          obtain <hFty, hFlen> := ihF hF
          obtain <hXty, hXlen> := ihX hX
          have hsplit := oSplit_of_zipOr hzip hFlen hXlen
          have hXnone := allNone_of_allFalse hXlen hnone
          obtain <hlen, _> := zipOr_length hzip
          exact <HasType.appU hsplit hXnone hFty hXty,
            hlen.trans hFlen>
        * rw [ite_eq_right hnone] at h
          simp at h
      * rw [ite_eq_right hA] at h
        simp at h
| unit =>
  simp only [infer] at h
  obtain <rfl, rfl> := h
  exact <HasType.unit (allNone_unused Delta), by simp [List.length_replicate]>
| bitLit b =>
  simp only [infer] at h

```

```

    obtain <rfl, rfl> := h
    exact <HasType.bitLit (allNone_unused Delta), by simp [List.length_replicate]>
| pair M N ihM ihN =>
  simp only [infer] at h
  cases hM : infer Gamma Delta M with
  | none => simp [hM] at h
  | some pM =>
    obtain <A_0, uM> := pM
    cases hN : infer Gamma Delta N with
    | none => simp [hM, hN] at h
    | some pN =>
      obtain <B_0, uN> := pN
      simp [hM, hN] at h
      cases hzip : zipOr uM uN with
      | none => simp [hzip] at h
      | some u' =>
        simp [hzip] at h
        obtain <rfl, rfl> := h
        obtain <hMty, hMlen> := ihM hM
        obtain <hNty, hNlen> := ihN hN
        have hsplit := oSplit_of_zipOr hzip hMlen hNlen
        obtain <hlen, _> := zipOr_length hzip
        exact <HasType.pair hsplit hMty hNty, hlen.trans hMlen>
| unpair M K ihM ihK =>
  simp only [infer] at h
  cases hM : infer Gamma Delta M with
  | none => simp [hM] at h
  | some pM =>
    obtain <TM, uM> := pM
    cases hK : infer Gamma Delta K with
    | none => simp [hM, hK] at h
    | some pK =>
      obtain <TK, uK> := pK
      simp [hM, hK] at h
      cases TM with
      | var _ => simp at h
      | unit => simp at h
      | bit => simp at h
      | qubit => simp at h
      | arrow _ _ _ => simp at h
      | mu _ => simp at h
      | tensor A_0 B_0 =>
        cases TK with
        | var _ => simp at h
        | unit => simp at h
        | bit => simp at h
        | qubit => simp at h
        | tensor _ _ => simp at h
        | mu _ => simp at h
        | arrow ? A_1 R =>
          cases ? with
          | unres => simp at h
          | lin =>
            cases R with
            | var _ => simp at h
            | unit => simp at h

```

```

| bit => simp at h
| qubit => simp at h
| tensor _ _ => simp at h
| mu _ => simp at h
| arrow ?_2 B_1 C =>
  cases ?_2 with
  | unres => simp at h
  | lin =>
    dsimp at h
    by_cases hAB : A_0 = A_1 /\ B_0 = B_1
    * rcases hAB with <rfl, rfl>
      rw [ite_eq_left (And.intro rfl rfl)] at h
      cases hzip : zipOr uM uK with
      | none => simp [hzip] at h
      | some u' =>
        simp [hzip] at h
        obtain <rfl, rfl> := h
        obtain <hMty, hMlen> := ihM hM
        obtain <hKty, hKlen> := ihK hK
        have hsplit := oSplit_of_zipOr hzip hMlen

hKlen

        obtain <hlen, _> := zipOr_length hzip
        exact <HasType.unpair hsplit hMty hKty,
          hlen.trans hMlen>

    *
      rw [ite_eq_right hAB] at h
      simp at h

| ite B T E ihB ihT ihE =>
  simp only [infer] at h
  cases hB : infer Gamma Delta B with
  | none => simp [hB] at h
  | some pB =>
    obtain <TB, uB> := pB
    cases hT : infer Gamma Delta T with
    | none => simp [hB, hT] at h
    | some pT =>
      obtain <TT, uT> := pT
      cases hE : infer Gamma Delta E with
      | none => simp [hB, hT, hE] at h
      | some pE =>
        obtain <TE, uE> := pE
        simp [hB, hT, hE] at h
        cases TB with
        | var _ => simp at h
        | unit => simp at h
        | qubit => simp at h
        | tensor _ _ => simp at h
        | arrow _ _ _ => simp at h
        | mu _ => simp at h
        | bit =>
          dsimp at h
          by_cases hbr : TT = TE /\ uT = uE
          * rcases hbr with <rfl, rfl>
            rw [ite_eq_left (And.intro rfl rfl)] at h
            cases hzip : zipOr uB uT with
            | none => simp [hzip] at h

```

```

| some u' =>
  simp [hzip] at h
  obtain <rfl, rfl> := h
  obtain <hBty, hBlen> := ihB hB
  obtain <hTty, hTlen> := ihT hT
  obtain <hEty, _> := ihE hE
  have hsplit := oSplit_of_zipOr hzip hBlen hTlen
  obtain <hlen, _> := zipOr_length hzip
  exact <HasType.ite hsplit hBty hTty hEty, hlen.trans hBlen
>

*
rw [ite_eq_right hbr] at h
simp at h

| prim p =>
  simp only [infer] at h
  obtain <rfl, rfl> := h
  exact <HasType.prim (allNone_unused Delta), by simp [List.length_replicate]>
| measure Q K ihQ ihK =>
  simp only [infer] at h
  cases hQ : infer Gamma Delta Q with
  | none => simp [hQ] at h
  | some pQ =>
    obtain <TQ, uQ> := pQ
    cases hK : infer Gamma Delta K with
    | none => simp [hQ, hK] at h
    | some pK =>
      obtain <TK, uK> := pK
      simp [hQ, hK] at h
      cases TQ with
      | var _ => simp at h
      | unit => simp at h
      | bit => simp at h
      | tensor _ _ => simp at h
      | arrow _ _ _ => simp at h
      | mu _ => simp at h
      | qubit =>
        cases TK with
        | var _ => simp at h
        | unit => simp at h
        | bit => simp at h
        | qubit => simp at h
        | tensor _ _ => simp at h
        | mu _ => simp at h
        | arrow ? TB R =>
          cases ? with
          | lin => simp at h
          | unres =>
            cases TB with
            | var _ => simp at h
            | unit => simp at h
            | qubit => simp at h
            | tensor _ _ => simp at h
            | arrow _ _ _ => simp at h
            | mu _ => simp at h
            | bit =>
              cases R with

```

```

| var _ => simp at h
| unit => simp at h
| bit => simp at h
| qubit => simp at h
| tensor _ _ => simp at h
| mu _ => simp at h
| arrow ?_2 TQ_2 A_0 =>
  cases ?_2 with
  | unres => simp at h
  | lin =>
    cases TQ_2 with
    | var _ => simp at h
    | unit => simp at h
    | bit => simp at h
    | tensor _ _ => simp at h
    | arrow _ _ _ => simp at h
    | mu _ => simp at h
    | qubit =>
      cases hzip : zipOr uQ uK with
      | none => simp [hzip] at h
      | some u' =>
        simp [hzip] at h
        obtain <rfl, rfl> := h
        obtain <hQty, hQlen> := ihQ hQ
        obtain <hKty, hKlen> := ihK hK
        have hsplit := oSplit_of_zipOr hzip

hQlen hKlen

obtain <hlen, _> := zipOr_length hzip
exact <HasType.measure hsplit hQty hKty,
  hlen.trans hQlen>

| fix A_0 M ih =>
  simp only [infer] at h
  cases hM : infer Gamma Delta M with
  | none => simp [hM] at h
  | some p =>
    obtain <TM, uM> := p
    simp [hM] at h
    cases TM with
    | var _ => simp at h
    | unit => simp at h
    | bit => simp at h
    | qubit => simp at h
    | tensor _ _ => simp at h
    | mu _ => simp at h
    | arrow ? A_1 A_2 =>
      cases ? with
      | lin => simp at h
      | unres =>
        dsimp at h
        by_cases hfix :
          Ty.admissible A_0 = true /\ Ty.duplicable A_0 = true /\
            A_1 = A_0 /\ A_2 = A_0 /\ allFalse uM = true
        * rw [ite_eq_left hfix] at h
        obtain <rfl, rfl> := h
        rcases hfix with <hadm, hdup, rfl, rfl, hu>
        obtain <hMty, hlen> := ih hM

```

```

        exact <HasType.fix (Ty.admissible_eq_true_iff.mp hadm)
              (Ty.duplicable_eq_true_iff.mp hdup)
              (allNone_of_allFalse hlen hu) hMty, hlen>
      *
      rw [ite_eq_right hfix] at h
      simp at h
| fold A_0 M ih =>
  simp only [infer] at h
  cases hM : infer Gamma Delta M with
  | none => simp [hM] at h
  | some p =>
    obtain <B, uM> := p
    simp [hM] at h
    rcases h with <hform, rfl, rfl>
    rcases hform with <hadm, hB>
    subst hB
    obtain <hMty, hlen> := ih hM
    exact <HasType.fold (Ty.admissible_eq_true_iff.mp hadm) hMty, hlen>
| unfold M ih =>
  simp only [infer] at h
  cases hM : infer Gamma Delta M with
  | none => simp [hM] at h
  | some p =>
    obtain <TM, uM> := p
    simp [hM] at h
    cases TM with
    | var _ => simp at h
    | unit => simp at h
    | bit => simp at h
    | qubit => simp at h
    | tensor _ _ => simp at h
    | arrow _ _ _ => simp at h
    | mu A_0 =>
      by_cases hadm : Ty.admissible (.mu A_0) = true
      * simp [hadm] at h
      obtain <rfl, rfl> := h
      obtain <hMty, hlen> := ih hM
      exact <HasType.unfold (Ty.admissible_eq_true_iff.mp hadm) hMty,
            hlen>
      * simp [hadm] at h

```

## 2.4.196 No well-typed unrestricted lambda may bind a qubit

**Statement.** No well-typed unrestricted lambda may bind a qubit. Formally: False.

**Proof.** By case analysis on the derivation that `.lam .unres .qubit M` has type `A` under the unrestricted context  $\Gamma$  and the linear context  $\Delta$ . The case of an unrestricted lambda abstraction cannot occur. The goal is simplified using the definition of the duplicability and the definition of the duplicability at a position.

### Lean 4 source `QLambda/Linear/Typing.lean`

```

theorem no_unrestricted_qubit_binder {Gamma Delta M A}
  (h : HasType Gamma Delta (.lam .unres .qubit M) A) : False := by
  cases h with

```



```
| lamU _ hdup _ => simp [Ty.Duplicable, Ty.DuplicableAt] at hdup
```

#### 2.4.197 Unrestricted closures carry no free linear resource

**Statement.** Unrestricted closures carry no free linear resource. Formally:  $\text{AllNone } \Delta$ .

**Proof.** By case analysis on the derivation that  $\text{.lam .unres } A \ M$  has type  $B$  under the unrestricted context  $\Gamma$  and the linear context  $\Delta$ . Only the rule for an unrestricted lambda abstraction can produce it, and the claim is one of that rule’s premises.

##### Lean 4 source `QLambda/Linear/Typing.lean`

```
theorem unrestricted_lambda_no_linear_capture {Gamma Delta A M B}
  (h : HasType Gamma Delta (.lam .unres A M) B) : AllNone Delta := by
  cases h with
  | lamU _ _ hnone _ => exact hnone
```

#### 2.4.198 Decidability of admissibility at a position

**Definition.** Equip  $\text{AdmissibleAt } n \ A$  with its canonical decidability.

**Construction.** Given by a case distinction.

##### Lean 4 source `QLambda/Linear/instDecidableAdmissibleAt.lean`

```
instance instDecidableAdmissibleAt {n A} : Decidable (AdmissibleAt n A) :=
  if h : admissibleAt n A = true then
    isTrue (admissibleAt_eq_true_iff.mp h)
  else
    isFalse fun hA => h (admissibleAt_eq_true_iff.mpr hA)
```

#### 2.4.199 Decidability of absence of the recursion variable

**Definition.** Equip  $\text{DoesNotContainAt target } A$  with its canonical decidability.

**Construction.** Given by a case distinction.

##### Lean 4 source `QLambda/Linear/instDecidableDoesNotContainAt.lean`

```
instance instDecidableDoesNotContainAt {target A} :
  Decidable (DoesNotContainAt target A) :=
  if h : doesNotContainAt target A = true then
    isTrue (doesNotContainAt_eq_true_iff.mp h)
  else
    isFalse fun hA => h (doesNotContainAt_eq_true_iff.mpr hA)
```

#### 2.4.200 Decidability of duplicability at a position

**Definition.** Equip  $\text{DuplicableAt } \kappa \ A$  with its canonical decidability.

**Construction.** Given by a case distinction.

##### Lean 4 source `QLambda/Linear/instDecidableDuplicableAt.lean`

```
instance instDecidableDuplicableAt {? A} : Decidable (DuplicableAt ? A) :=
  if h : duplicableAt ? A = true then
    isTrue (duplicableAt_eq_true_iff.mp h)
  else
    isFalse fun hA => h (duplicableAt_eq_true_iff.mpr hA)
```

#### 2.4.201 Decidability of positivity of recursion

**Definition.** Equip `PositiveRec A` with its canonical decidability.

**Construction.** Given by a case distinction.

**Lean 4 source** [QLambda/Linear/instDecidablePositiveRec.lean](#)

```
instance instDecidablePositiveRec {A} : Decidable (PositiveRec A) :=
  if h : positiveRec A = true then
    isTrue (positiveRec_eq_true_iff.mp h)
  else
    isFalse fun hA => h (positiveRec_eq_true_iff.mpr hA)
```

#### 2.4.202 Decidability of strict positivity

**Definition.** Equip `StrictlyPositiveAt target A` with its canonical decidability.

**Construction.** Given by a case distinction.

**Lean 4 source** [QLambda/Linear/instDecidableStrictlyPositiveAt.lean](#)

```
instance instDecidableStrictlyPositiveAt {target A} :
  Decidable (StrictlyPositiveAt target A) :=
  if h : strictlyPositiveAt target A = true then
    isTrue (strictlyPositiveAt_eq_true_iff.mp h)
  else
    isFalse fun hA => h (strictlyPositiveAt_eq_true_iff.mpr hA)
```

#### 2.4.203 Decidability of well-scopedness

**Definition.** Equip `WellScopedAt n A` with its canonical decidability.

**Construction.** Given by a case distinction.

**Lean 4 source** [QLambda/Linear/instDecidableWellScopedAt.lean](#)

```
instance instDecidableWellScopedAt {n A} : Decidable (WellScopedAt n A) :=
  if h : wellScopedAt n A = true then
    isTrue (wellScopedAt_eq_true_iff.mp h)
  else
    isFalse fun hA => h (wellScopedAt_eq_true_iff.mpr hA)
```

#### 2.4.204 Zero element on classical bit carriers

**Definition.** Equip `ClassicalBitCarrier n` with its canonical zero element.

**Construction.** Given by  $\langle\langle 0, \text{by simp [Superoperator.comp\_zero\_right]}\rangle\rangle$ .

**Lean 4 source** `QLambda/Linear/instZeroClassicalBitCarrier.lean`

```
noncomputable instance instZeroClassicalBitCarrier (n : Nat) : Zero (
  ClassicalBitCarrier n) :=
  <<0, by simp [Superoperator.comp_zero_right]>>
```

#### 2.4.205 Equivalence relation on terms

**Definition.** Equip `Term` with its canonical equivalence relation.

**Construction.** The operations are given by: `r` and `iseqv`. Each required law follows from the corresponding property of the underlying data.

**Lean 4 source** `QLambda/Linear/operationalSetoid.lean`

```
instance operationalSetoid : Setoid Term where
  r := OperationalEq
  iseqv := <OperationalEq.refl, OperationalEq.symm, OperationalEq.trans>
```

---

### 3 Finite Quantum Runtime

A runtime configuration contains a finite register state, allocated-wire information, an environment, and a typed control stack. Gates act by their canonical matrices. Reset discards and reinitializes one wire. Measurement has two labelled branches whose weights are obtained from the Born rule.


The runtime proves:

- internal-transition preservation (`QLambda.Palomar.runtime_internal_preservation`);
- measurement-transition preservation (`QLambda.Palomar.runtime_measurement_preservation`);
- nonnegativity and upper bounds of branch probabilities;
- normalization of the two measurement outcomes (`QLambda.Palomar.runtime_born_normalizes`);
- progress modulo finite-wire exhaustion (`QLambda.Palomar.runtime_progress`).

The runtime does not add source-level probability. Probabilities label physical measurement transitions only.

#### 3.1 Theorem dependence

and measurement preservation, Born normalization, and runtime progress.

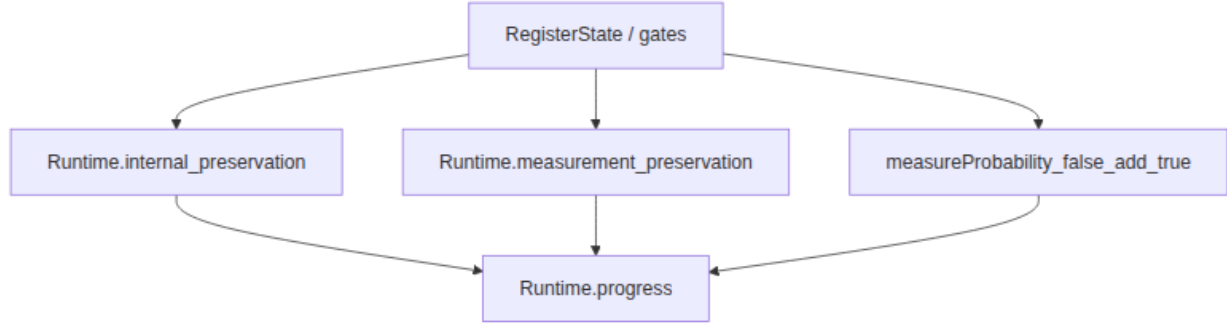

**Figure 4:** Section 3 theorem dependence: register dynamics support internal

## 3.2 Blueprint declarations — Finite quantum runtime

*Auto-generated from the Lean sources (185 declarations). Each card states the result in mathematical English and explains the idea of its proof or construction; the Lean source follows each card.*

### 3.2.1 A finite $D$ -valued computation on an $n$ -dimensional register

**Definition.** A finite  $D$ -valued computation on an  $n$ -dimensional register: an instrument together with a classical outcome embedding into  $D$ . This is a Type-level monad, not a complete lattice. It therefore cannot yet instantiate `IsQuantumPowerModel`.

**Construction.** An element consists of `Outcome`, `branch`, `value` and `trace_nonincreasing`.

#### Lean 4 source `QLambda/FiniteInstrumentComp.lean`

```

structure FiniteInstrumentComp (n : Nat) (D : Type*) where
  Outcome : Type
  [outcomeFintype : Fintype Outcome]
  branch : Outcome -> KrausFamily n n
  value : Outcome -> D
  trace_nonincreasing :
    forall ? : Matrix (Fin n) (Fin n) ?, ?PosSemidef ->
      (? o : Outcome, (Matrix.trace (KrausFamily.applyMat (branch o) ?)).re) <=
        (Matrix.trace ?).re

```

### 3.2.2 Definition of the outcome prob of finite instrument computations

**Definition.** Outcome probability  $\text{Tr}(\Phi_o(\rho))$ .


**Construction.** Defined to be  $(\text{tr} (\text{KrausFamily.applyMat } (\mu.\text{branch } o) \rho.\text{mat})).\text{re}$ .

#### Lean 4 source `QLambda/FiniteInstrumentComp.lean`

```

def outcomeProb (? : FiniteInstrumentComp n D) (? : SubNormalizedDensity n)
  (o : ?.Outcome) : ? :=
  (Matrix.trace (KrausFamily.applyMat (?.branch o) ?.mat)).re

```

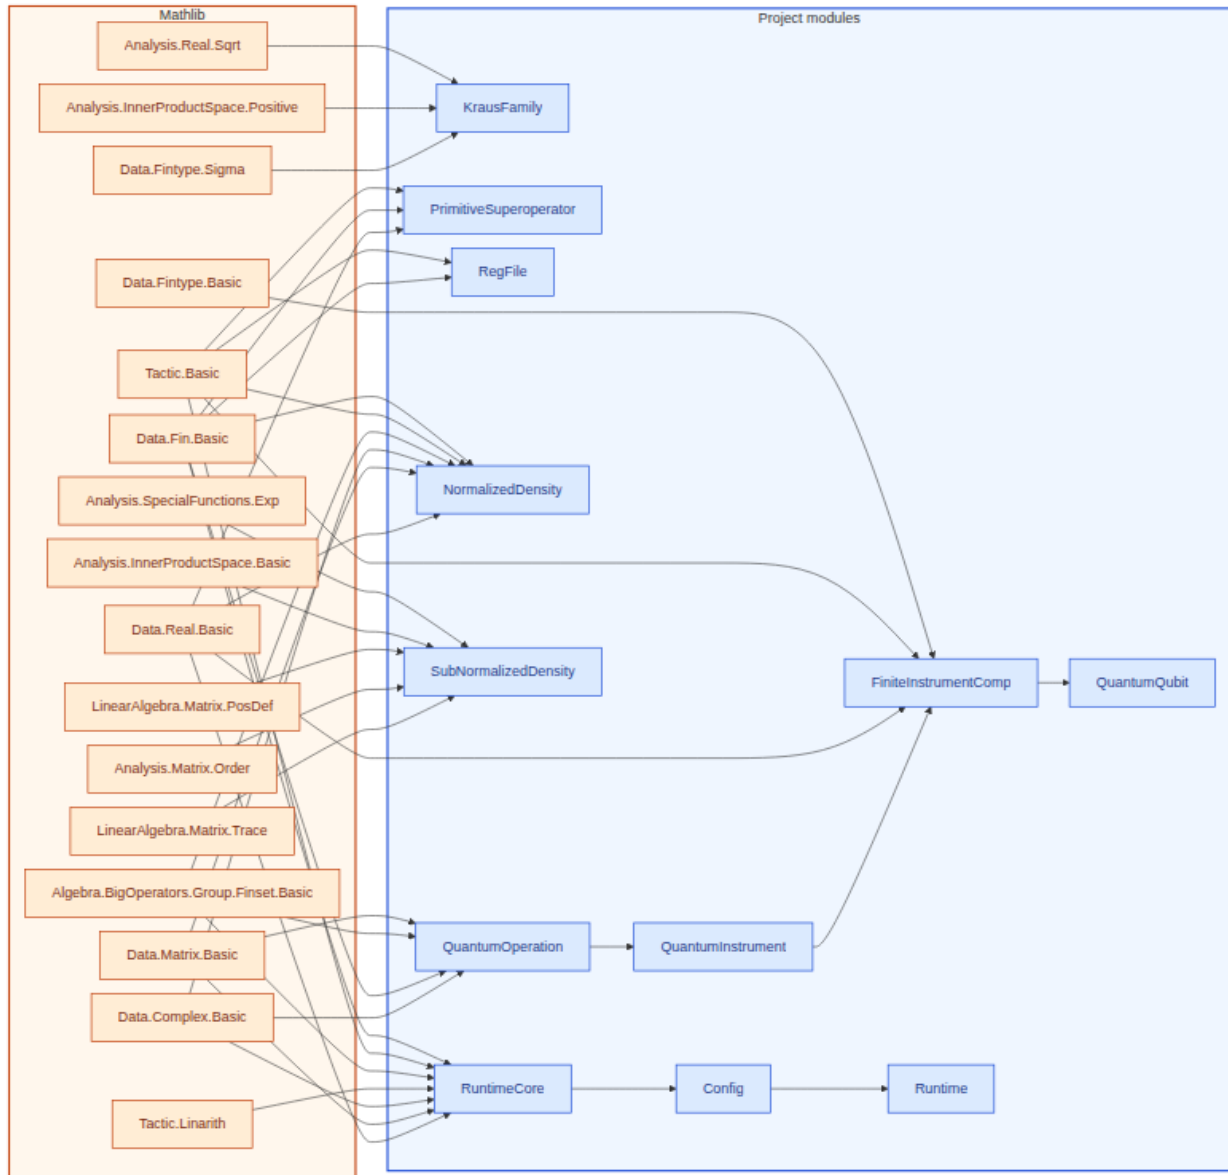

**Figure 5:** Lean module dependencies for §3 (finite quantum runtime). Amber box: Mathlib imports (16 listed). Blue box: project modules (12).

### 3.2.3 Deterministic return of a classical value, leaving the register untouched

**Definition.** Deterministic return of a classical value, leaving the register untouched.

**Construction.** Constructed by supplying each component: outcome, branch, value and trace nonincreasing. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/FiniteInstrumentComp.lean](#)

```
def unit (d : D) : FiniteInstrumentComp n D where
  Outcome := Unit
  branch := fun _ => KrausFamily.identity n
  value := fun _ => d
  trace_nonincreasing := by
    intro ? _
    simp [KrausFamily.applyMat_identity]
```

### 3.2.4 Post-compose classical outcomes

**Definition.** Post-compose classical outcomes.

**Construction.** Constructed by supplying each component: outcome, outcome fintype, branch, value and trace nonincreasing. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/FiniteInstrumentComp.lean](#)

```
def map (f : D -> E) (? : FiniteInstrumentComp n D) :
  FiniteInstrumentComp n E where
  Outcome := ?.Outcome
  outcomeFintype := ?.outcomeFintype
  branch := ?.branch
  value := f comp ?.value
  trace_nonincreasing := ?.trace_nonincreasing
```

### 3.2.5 Functorial action of an identity

**Statement.** For a finite instrument computation  $\mu$ : the functorial action of `id` and  $\mu$  equals  $\mu$ .

**Proof.** By definition. Unfolding the functorial action turns the left-hand side, the functorial action of `id` and  $\mu$ , into the right-hand side,  $\mu$ ; the two sides are the same term.

**Lean 4 source** [QLambda/FiniteInstrumentComp.lean](#)

```
@[simp] theorem map_id (? : FiniteInstrumentComp n D) :
  map id ? = ? :=
  rfl
```

### 3.2.6 The functorial action for finite instrument computations preserves composition

**Statement.** For a finite instrument computation  $\mu$ : the functorial action of the composite of  $g$  after  $f$  and  $\mu$  equals the functorial action of  $g$  and the functorial action of  $f$  and  $\mu$ .

**Proof.** By definition. Unfolding the functorial action turns the left-hand side, the functorial action of the composite of  $g$  after  $f$  and  $\mu$ , into the right-hand side, the functorial action of  $g$  and the functorial action of  $f$  and  $\mu$ ; the two sides are the same term.

#### Lean 4 source `QLambda/FiniteInstrumentComp.lean`

```
@[simp] theorem map_comp (g : E -> F) (f : D -> E) (? : FiniteInstrumentComp n D) :
  map (g comp f) ? = map g (map f ?) :=
  rfl
```

### 3.2.7 Kleisli extension: run $\mu$ , then the continuation at the returned value

**Definition.** Kleisli extension: run  $\mu$ , then the continuation at the returned value. Sequential composition of Kraus families implements the quantum effect.

**Construction.** Constructed by supplying each component: outcome, outcome fintype, let i, branch, value and trace nonincreasing. The accompanying laws are verified from the definitions.

#### Lean 4 source `QLambda/FiniteInstrumentComp.lean`

```
def bind (? : FiniteInstrumentComp n D) (f : D -> FiniteInstrumentComp n E) :
  FiniteInstrumentComp n E where
  Outcome := Sigma o : ?.Outcome, (f (?.value o)).Outcome
  outcomeFintype :=
    letI := ?.outcomeFintype
    letI : forall o : ?.Outcome, Fintype ((f (?.value o)).Outcome) :=
      fun o => (f (?.value o)).outcomeFintype
    inferInstance
  branch := fun p =>
    KrausFamily.comp ((f (?.value p.1)).branch p.2) (?.branch p.1)
  value := fun p => (f (?.value p.1)).value p.2
  trace_nonincreasing := by
    intro ? h?
    let _ := ?.outcomeFintype
    let _ : forall o : ?.Outcome, Fintype ((f (?.value o)).Outcome) :=
      fun o => (f (?.value o)).outcomeFintype
    have hcont :
      forall o : ?.Outcome,
        (? o' : (f (?.value o)).Outcome,
          (Matrix.trace
            (KrausFamily.applyMat
              (KrausFamily.comp ((f (?.value o)).branch o') (?.branch o))
              ?)).re) <=
            (Matrix.trace (KrausFamily.applyMat (?.branch o) ?)).re := by
      intro o
      have hpos := KrausFamily.applyMat_posSemidef (?.branch o) h?
      have hTNI := (f (?.value o)).trace_nonincreasing
      (KrausFamily.applyMat (?.branch o) ?) hpos
      refine le_trans ?_ hTNI
      refine Finset.sum_le_sum ?_
      intro o' _
      rw [KrausFamily.applyMat_comp]
    calc
      (? p : (Sigma o : ?.Outcome, (f (?.value o)).Outcome),
```

```

(Matrix.trace
  (KrausFamily.applyMat
    (KrausFamily.comp ((f (? .value p.1)).branch p.2) (? .branch p.1))
    ?)) .re)
= ? o : ?.Outcome, ? o' : (f (? .value o)).Outcome,
  (Matrix.trace
    (KrausFamily.applyMat
      (KrausFamily.comp ((f (? .value o)).branch o') (? .branch o))
      ?)) .re := by
  rw [Fintype.sum_sigma]
_ <= ? o : ?.Outcome,
  (Matrix.trace (KrausFamily.applyMat (? .branch o) ?)) .re :=
  Finset.sum_le_sum fun o _ => hcont o
_ <= (Matrix.trace ?) .re :=
  ?.trace_nonincreasing ? h?

```

### 3.2.8 Wrap a single quantum operation as a computation returning $d$

**Definition.** Wrap a single quantum operation as a computation returning  $d$ .

**Construction.** Constructed by supplying each component: outcome, branch, value and trace nonincreasing. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/FiniteInstrumentComp.lean](#)

```

def ofOperation (? : QuantumOperation n n) (d : D) :
  FiniteInstrumentComp n D where
  Outcome := Unit
  branch := fun _ => ?.kraus
  value := fun _ => d
  trace_nonincreasing := by
    intro ? h?
    simpa using ?.trace_nonincreasing ? h?

```

### 3.2.9 A linear operator from an $n$ -dimensional register to an $m$ -dimensional register

**Definition.** A linear operator from an  $n$ -dimensional register to an  $m$ -dimensional register.

**Construction.** Defined to be the matrix of the finite index of  $m$ , the finite index of  $n$ ,  $\mathbb{C}$ .

**Lean 4 source** [QLambda/KrausFamily.lean](#)

```

abbrev KrausOperator (n m : Nat) :=
  Matrix (Fin m) (Fin n) ?

```

### 3.2.10 A finite operator-sum presentation of a completely positive map

**Definition.** A finite operator-sum presentation of a completely positive map.

**Construction.** Defined to be the list of the Kraus operator of  $n$  and  $m$ .

**Lean 4 source** [QLambda/KrausFamily.lean](#)



```
abbrev KrausFamily (n m : Nat) :=
  List (KrausOperator n m)
```

### 3.2.11 Rank-one Choi contribution of one Kraus operator

**Definition.** Rank-one Choi contribution of one Kraus operator.

**Construction.** The map sending  $p \ q$  to the product of  $a$  of  $p.1$  and  $p.2$  and the adjoint of  $A \ q.1 \ q.2$ .

**Lean 4 source** [QLambda/KrausFamily.lean](#)

```
def choiTerm (A : KrausOperator n m) :
  Matrix (Fin m x Fin n) (Fin m x Fin n) ? :=
  fun p q => A p.1 p.2 * star (A q.1 q.2)
```

### 3.2.12 Choi matrix of a Kraus presentation

**Definition.** Choi matrix of a Kraus presentation. Unlike the Kraus list, this matrix is intrinsic to the represented completely positive map.

**Construction.** Defined to be  $(K.map \text{choiTerm}).sum$ .

**Lean 4 source** [QLambda/KrausFamily.lean](#)

```
def choi (K : KrausFamily n m) :
  Matrix (Fin m x Fin n) (Fin m x Fin n) ? :=
  (K.map choiTerm).sum
```

### 3.2.13 The matrix action $\rho \mapsto \sum_i K_i \rho K_i^\dagger$ of a finite Kraus family

**Definition.** The matrix action  $\rho \mapsto \sum_i K_i \rho K_i^\dagger$  of a finite Kraus family.

**Construction.** Defined to be  $(K.map \text{fun } A \Rightarrow A * \rho * A^\dagger).sum$ .

**Lean 4 source** [QLambda/KrausFamily.lean](#)

```
def applyMat (K : KrausFamily n m) (? : Matrix (Fin n) (Fin n) ?) :
  Matrix (Fin m) (Fin m) ? :=
  (K.map fun A => A * ? * A?).sum
```

### 3.2.14 A matrix unit, used to recover Choi entries from the represented CP map

**Definition.** A matrix unit, used to recover Choi entries from the represented CP map.

**Construction.** The map sending  $k \ l$  to if  $k = i$  then if  $l = j$  then 1 else 0 else 0.

**Lean 4 source** [QLambda/KrausFamily.lean](#)

```
def matrixUnit (i j : Fin n) : Matrix (Fin n) (Fin n) ? :=
  fun k l => if k = i then if l = j then 1 else 0 else 0
```

### 3.2.15 The empty family is the zero CP map

**Definition.** The empty family is the zero CP map.

**Construction.** Defined to be `[]`.

**Lean 4 source** [QLambda/KrausFamily.lean](#)

```
def zero : KrausFamily n m :=  
  []
```

### 3.2.16 The identity channel's one-element Kraus presentation

**Definition.** The identity channel's one-element Kraus presentation.

**Construction.** Defined to be `[1]`.

**Lean 4 source** [QLambda/KrausFamily.lean](#)

```
def identity (n : Nat) : KrausFamily n n :=  
  [1]
```

### 3.2.17 Sequential composition of two operator-sum presentations

**Definition.** Sequential composition of two operator-sum presentations.

**Construction.** Defined to be the product of the flat map of `fun B => K.map fun A => B` and `A`.

**Lean 4 source** [QLambda/KrausFamily.lean](#)

```
def comp {? : Nat} (L : KrausFamily m ?) (K : KrausFamily n m) :  
  KrausFamily n ? :=  
  L.flatMap fun B => K.map fun A => B * A
```

### 3.2.18 Scale every Kraus operator by a scalar

**Definition.** Scale every Kraus operator by a scalar.

**Construction.** Defined to be the functorial action of `c · *`.

**Lean 4 source** [QLambda/KrausFamily.lean](#)

```
def scale (c : ?) (K : KrausFamily n m) : KrausFamily n m :=  
  K.map (c * *)
```

### 3.2.19 Choi matrix of the empty list for Kraus families

**Statement.** The Choi matrix of `[]` equals 0. Formally: `choi [] = 0`.

**Proof.** The goal is simplified using the definition of the Choi matrix.

**Lean 4 source** [QLambda/KrausFamily.lean](#)

```
@[simp] theorem choi_nil :
  choi ([] : KrausFamily n m) = 0 := by
  simp [choi]
```

### 3.2.20 Choi matrix of a single-entry element for Kraus families

**Statement.** The Choi matrix of  $[A]$  equals the Choi term of  $A$ . Formally:  $\text{choi } [A] = \text{choiTerm } A$ .

**Proof.** The goal is simplified using the definition of the Choi matrix.

**Lean 4 source** [QLambda/KrausFamily.lean](#)

```
@[simp] theorem choi_single (A : KrausOperator n m) :
  choi [A] = choiTerm A := by
  simp [choi]
```

### 3.2.21 Choi matrix of an extended list for Kraus families

**Statement.** For the Kraus family  $K$ : the Choi matrix of a of  $::$  and  $K$  equals the sum of the Choi term of  $A$  and the Choi matrix of  $K$ .

**Proof.** The goal is simplified using the definition of the Choi matrix.

**Lean 4 source** [QLambda/KrausFamily.lean](#)

```
theorem choi_cons (A : KrausOperator n m) (K : KrausFamily n m) :
  choi (A :: K) = choiTerm A + choi K := by
  simp [choi]
```

### 3.2.22 Choi matrix of a concatenation for Kraus families

**Statement.** For Kraus families  $K, L$ : the Choi matrix of the concatenation of  $K$  and  $L$  equals the sum of the Choi matrix of  $K$  and the Choi matrix of  $L$ .

**Proof.** The goal is simplified using the definition of the Choi matrix, the fact that mapping distributes over concatenation and standard identities for lists.

**Lean 4 source** [QLambda/KrausFamily.lean](#)

```
theorem choi_append (K L : KrausFamily n m) :
  choi (K ++ L) = choi K + choi L := by
  simp [choi, List.map_append, List.sum_append]
```

### 3.2.23 Each Choi entry is an output matrix entry obtained by applying the represented CP map to a matrix unit

**Statement.** Each Choi entry is an output matrix entry obtained by applying the represented CP map to a matrix unit. Formally:  $\text{applyMat } K \text{ (matrixUnit } p.2 \text{ } q.2) \text{ } p.1 \text{ } q.1 = \text{choi } K \text{ } p \text{ } q$ .

**Proof.** By induction on the Kraus family  $K$ . For the empty split, the claim is checked directly; for a context extended by one cell, the claim follows from the induction hypothesis. The key step rewrites with

the definition of the action on a matrix, the definition of the Choi matrix, the definition of the matrix unit and the definition of the Choi term.

#### Lean 4 source `QLambda/KrausFamily.lean`

```
theorem applyMat_matrixUnit (K : KrausFamily n m) (p q : Fin m × Fin n) :
  applyMat K (matrixUnit p.2 q.2) p.1 q.1 = choi K p q := by
  induction K with
  | nil => simp [applyMat, choi]
  | cons A K ih =>
    change (A * matrixUnit p.2 q.2 * A?) p.1 q.1 +
      applyMat K (matrixUnit p.2 q.2) p.1 q.1 =
      choiTerm A p q + choi K p q
    rw [ih]
    congr 1
    simp [matrixUnit, choiTerm, Matrix.mul_apply]
```

### 3.2.24 Every output coordinate is the contraction of the input matrix with the corresponding block of the Choi matrix

**Statement.** Every output coordinate is the contraction of the input matrix with the corresponding block of the Choi matrix. Formally:  $\text{applyMat } K \rho a b = \sum_i \sum_j, \text{choi } K (a, i) (b, j) * \rho i j$ .

**Proof.** By induction on the Kraus family  $K$ . For the empty split, the claim is checked directly; for a context extended by one cell, the claim follows from the induction hypothesis. The key step rewrites with the definition of the action on a matrix, the definition of the Choi matrix, the Choi matrix of an extended list for Kraus families and standard identities for matrices. The remaining identity is a polynomial identity in a commutative ring.

#### Lean 4 source `QLambda/KrausFamily.lean`

```
theorem applyMat_apply (K : KrausFamily n m)
  (? : Matrix (Fin n) (Fin n) ?) (a b : Fin m) :
  applyMat K ? a b =
    ? i, ? j, choi K (a, i) (b, j) * ? i j := by
  induction K with
  | nil => simp [applyMat, choi]
  | cons A K ih =>
    change (A * ? * A?) a b + applyMat K ? a b =
      ? i, ? j, choi (A :: K) (a, i) (b, j) * ? i j
    rw [choi_cons, ih]
    simp only [Matrix.add_apply, choiTerm, add_mul, Finset.sum_add_distrib]
    congr 1
    simp only [Matrix.mul_apply, conjTranspose_apply]
    simp_rw [Finset.sum_mul]
    rw [Finset.sum_comm]
    apply Finset.sum_congr rfl
    intro i _
    apply Finset.sum_congr rfl
    intro j _
    ring
```

### 3.2.25 Positive semidefiniteness of the Choi term

**Statement.**  $\text{choiTerm } A$  is positive semidefinite. Formally:  $(\text{choiTerm } A).\text{PosSemidef}$ .

**Proof.** It follows from standard identities for matrices.

**Lean 4 source** [QLambda/KrausFamily.lean](#)

```
theorem choiTerm_posSemidef (A : KrausOperator n m) :
  (choiTerm A).PosSemidef := by
  let v : Fin m × Fin n → ? := fun p => A p.1 p.2
  change (Matrix.vecMulVec v (star v)).PosSemidef
  exact Matrix.posSemidef_vecMulVec_self_star v
```

### 3.2.26 Positive semidefiniteness of the Choi matrix

**Statement.** For the Kraus family  $K$ :  $\text{choi } K$  is positive semidefinite.

**Proof.** By induction on the Kraus family  $K$ . For the empty split, the claim is checked directly; for a context extended by one cell, the claim follows from the induction hypothesis. The key step rewrites with the Choi matrix of an extended list for Kraus families and the positive semidefiniteness of the Choi term.

**Lean 4 source** [QLambda/KrausFamily.lean](#)

```
theorem choi_posSemidef (K : KrausFamily n m) :
  (choi K).PosSemidef := by
  induction K with
  | nil => simp using (Matrix.PosSemidef.zero :
    (0 : Matrix (Fin m × Fin n) (Fin m × Fin n) ?).PosSemidef)
  | cons A K ih =>
    rw [choi_cons]
    exact (choiTerm_posSemidef A).add ih
```

### 3.2.27 Nonnegativity of the Choi matrix

**Statement.** For the Kraus family  $K$ :  $0 \leq \text{choi } K$ . Formally:  $0 \leq \text{choi } K$ .

**Proof.** The key step rewrites with the characterization of the order for subnormalized density matrices.

**Lean 4 source** [QLambda/KrausFamily.lean](#)

```
theorem choi_nonneg (K : KrausFamily n m) : 0 <= choi K := by
  rw [Matrix.le_iff]
  simp using choi_posSemidef K
```

### 3.2.28 Every positive semidefinite matrix on the Choi coordinate space has a finite Kraus presentation

**Statement.** Every positive semidefinite matrix on the Choi coordinate space has a finite Kraus presentation. Formally:  $\exists K : \text{KrausFamily } n \ m, \text{ choi } K = M$ .

**Proof.** Both sides are compared pointwise (by extensionality). Each component of the claim is established separately. The hypotheses are unpacked into their constituent data. The key step rewrites with the definition of the Choi matrix, standard identities for lists and the sum of a congruence.

### Lean 4 source `QLambda/KrausFamily.lean`

```
theorem exists_krausFamily_choi_eq
  {M : Matrix (Fin m x Fin n) (Fin m x Fin n) ?}
  (hM : M.PosSemidef) :
  exists K : KrausFamily n m, choi K = M := by
  obtain <k, v, hv> :=
    Matrix.posSemidef_iff_eq_sum_vecMulVec.mp hM
  let A : Fin k -> KrausOperator n m :=
    fun r i j => v r (i, j)
  refine <List.ofFn A, ?_>
  rw [choi, List.map_ofFn, List.sum_ofFn, hv]
  apply Finset.sum_congr rfl
  intro r _
  ext p q
  change v r p * star (v r q) = v r p * star (v r q)
  rfl
```

### 3.2.29 Equality of Choi denotations

**Definition.** Equality of Choi denotations.

**Construction.** Defined to be the Choi matrix of  $L$ .

### Lean 4 source `QLambda/KrausFamily.lean`

```
def ChoiSemEq (K L : KrausFamily n m) : Prop :=
  choi K = choi L
```

### 3.2.30 The CP order: $K \sqsubseteq L$ when the Choi difference is positive semidefinite

**Definition.** The CP order:  $K \sqsubseteq L$  when the Choi difference is positive semidefinite.

**Construction.** Defined to be the Choi matrix of  $L$ .

### Lean 4 source `QLambda/KrausFamily.lean`

```
def ChoiRefines (K L : KrausFamily n m) : Prop :=
  choi K <= choi L
```

### 3.2.31 Extensional equality of the represented operator-sum maps

**Definition.** Extensional equality of the represented operator-sum maps.

**Construction.** Defined to be  $\forall \rho, \text{applyMat } K \rho = \text{applyMat } L \rho$ .

### Lean 4 source `QLambda/KrausFamily.lean`

```
def SemEq (K L : KrausFamily n m) : Prop :=
  forall ?, applyMat K ? = applyMat L ?
```

### 3.2.32 Presentation-independent CP refinement witnessed by a residual Kraus family

**Definition.** Presentation-independent CP refinement witnessed by a residual Kraus family. Thus  $K \sqsubseteq_r L$  means  $L = K + R$  as CP maps.

**Construction.** Defined to be  $\exists R : \text{KrausFamily } n \ m, \text{ SemEq } L \ (K ++ R)$ .

**Lean 4 source** [QLambda/KrausFamily.lean](#)

```
def Refines (K L : KrausFamily n m) : Prop :=
  exists R : KrausFamily n m, SemEq L (K ++ R)
```

### 3.2.33 Definition of the semantic equality of applications

**Definition.** The semantic equality of applications is introduced by the definition below.

**Construction.** Defined to be `@SemEq`.

**Lean 4 source** [QLambda/KrausFamily.lean](#)

```
abbrev ApplySemEq := @SemEq
```

### 3.2.34 Definition of the residual refinement

**Definition.** The residual refinement is introduced by the definition below.

**Construction.** Defined to be `@Refines`.

**Lean 4 source** [QLambda/KrausFamily.lean](#)

```
abbrev ResidualRefines := @Refines
```

### 3.2.35 Extensional equality of operator-sum maps implies equality of their intrinsic Choi matrices

**Statement.** Extensional equality of operator-sum maps implies equality of their intrinsic Choi matrices. Formally:  $\text{choi } K = \text{choi } L$ .

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the fact that each Choi entry is an output matrix entry obtained by applying the represented CP map to a matrix unit and the hypothesis that  $K$  and  $L$  have the same semantics.

**Lean 4 source** [QLambda/KrausFamily.lean](#)

```
theorem choi_eq_of_semEq {K L : KrausFamily n m} (hKL : SemEq K L) :
  choi K = choi L := by
  ext p q
  rw [ <- applyMat_matrixUnit K p q, <- applyMat_matrixUnit L p q, hKL ]
```

### 3.2.36 Equality of Choi matrices implies extensional equality of the represented operator-sum maps

**Statement.** Equality of Choi matrices implies extensional equality of the represented operator-sum maps. Formally:  $\text{SemEq } K \ L$ .

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the fact that every output coordinate is the contraction of the input matrix with the corresponding block of the Choi matrix and the hypothesis that  $\text{choi } K = \text{choi } L$ .

**Lean 4 source** [QLambda/KrausFamily.lean](#)

```
theorem semEq_of_choi_eq {K L : KrausFamily n m}
  (hKL : choi K = choi L) : SemEq K L := by
  intro ?
  ext a b
  rw [applyMat_apply, applyMat_apply, hKL]
```

### 3.2.37 Choi equality exactly characterizes extensional equality of finite Kraus presentations

**Statement.** Choi equality exactly characterizes extensional equality of finite Kraus presentations. Formally:  $\text{SemEq } K \ L \leftrightarrow \text{choi } K = \text{choi } L$ .

**Proof.** The witness is assembled directly from its components, using the extensional equality of operator-sum maps implies equality of their intrinsic Choi matrices.

**Lean 4 source** [QLambda/KrausFamily.lean](#)

```
theorem semEq_iff_choi_eq (K L : KrausFamily n m) :
  SemEq K L <-> choi K = choi L :=
  <choi_eq_of_semEq, semEq_of_choi_eq>
```

### 3.2.38 Residual CP refinement implies Loewner refinement of Choi denotations

**Statement.** Residual CP refinement implies Loewner refinement of Choi denotations. Formally:  $\text{ChoiRefines } K \ L$ .

**Proof.** The hypotheses are unpacked into their constituent data. The key step rewrites with the definition of the Choi-order refinement, the extensional equality of operator-sum maps implies equality of their intrinsic Choi matrices, the Choi matrix of a concatenation for Kraus families and the usual algebraic identities.

**Lean 4 source** [QLambda/KrausFamily.lean](#)

```
theorem choiRefines_of_residualRefines {K L : KrausFamily n m}
  (hKL : ResidualRefines K L) : ChoiRefines K L := by
  obtain <R, hR> := hKL
  rw [ChoiRefines, choi_eq_of_semEq hR, choi_append]
  exact le_add_of_nonneg_right (choi_nonneg R)
```

### 3.2.39 Loewner refinement of Choi denotations is witnessed by a residual finite Kraus family

**Statement.** Loewner refinement of Choi denotations is witnessed by a residual finite Kraus family. Formally:  $\text{ResidualRefines } K \ L$ .



**Proof.** Each component of the claim is established separately. The hypotheses are unpacked into their constituent data. The key step rewrites with the Choi matrix of a concatenation for Kraus families.

#### Lean 4 source `QLambda/KrausFamily.lean`

```
theorem residualRefines_of_choiRefines {K L : KrausFamily n m}
  (hKL : ChoiRefines K L) : ResidualRefines K L := by
  have hdiff : (choi L - choi K).PosSemidef := hKL
  obtain <R, hR> := exists_krausFamily_choi_eq hdiff
  refine <R, semEq_of_choi_eq ?_>
  rw [choi_append, hR]
  abel
```

### 3.2.40 Residual refinement and Choi/Loewner refinement coincide for finite Kraus families

**Statement.** Residual refinement and Choi/Loewner refinement coincide for finite Kraus families. Formally:  $\text{ResidualRefines } K \ L \leftrightarrow \text{ChoiRefines } K \ L$ .

**Proof.** The witness is assembled directly from its components, using the residual CP refinement implies Loewner refinement of Choi denotations.

#### Lean 4 source `QLambda/KrausFamily.lean`

```
theorem residualRefines_iff_choiRefines (K L : KrausFamily n m) :
  ResidualRefines K L <-> ChoiRefines K L :=
  <choiRefines_of_residualRefines, residualRefines_of_choiRefines>
```

### 3.2.41 Reflexivity of the application semantic equality

**Statement.** For the Kraus family  $K$ :  $\text{ApplySemEq } K \ K$ . Formally:  $\text{ApplySemEq } K \ K$ .

**Proof.** Given the data, the conclusion is produced directly from reflexivity of equality.

#### Lean 4 source `QLambda/KrausFamily.lean`

```
theorem applySemEq_refl (K : KrausFamily n m) : ApplySemEq K K :=
  fun _ => rfl
```

### 3.2.42 Symmetry of the application semantic equality

**Statement.** For Kraus families  $K, L$ : if  $\text{ApplySemEq } K \ L$ , then  $\text{ApplySemEq } L \ K$ .

**Proof.** Given the data, the conclusion is produced directly.

#### Lean 4 source `QLambda/KrausFamily.lean`

```
theorem applySemEq_symm {K L : KrausFamily n m} :
  ApplySemEq K L -> ApplySemEq L K :=
  fun h ? => (h ?).symm
```

### 3.2.43 Transitivity of the application semantic equality

**Statement.** For Kraus families  $K, L, M$ : if  $\text{ApplySemEq } K \ L$  and  $\text{ApplySemEq } L \ M$ , then  $\text{ApplySemEq } K \ M$ .

**Proof.** Given the data, the conclusion is produced directly from the hypothesis that  $\text{ApplySemEq } K \ L$ .

#### Lean 4 source `QLambda/KrausFamily.lean`

```
theorem applySemEq_trans {K L M : KrausFamily n m}
  (hKL : ApplySemEq K L) (hLM : ApplySemEq L M) :
  ApplySemEq K M :=
  fun ? => (hKL ?).trans (hLM ?)
```

### 3.2.44 The Choi-matrix semantic equality holds exactly when a Choi-order refinement

**Statement.** For Kraus families  $K, L$ :  $\text{ChoiSemEq } K \ L$  if and only if  $\text{ChoiRefines } K \ L$  and  $\text{ChoiRefines } L \ K$ .

**Proof.** Equality is proved by showing both inequalities. Each component of the claim is established separately. The goal is simplified using the definition of the Choi-matrix semantic equality and the definition of the Choi-order refinement.

#### Lean 4 source `QLambda/KrausFamily.lean`

```
theorem choiSemEq_iff_choiRefines (K L : KrausFamily n m) :
  ChoiSemEq K L <-> ChoiRefines K L /\ ChoiRefines L K := by
  simp only [ChoiSemEq, ChoiRefines]
  exact <fun h => <h.le, h.ge>, fun h => le_antisymm h.1 h.2>
```

### 3.2.45 Action on a matrix of zero

**Statement.** For a matrix  $\rho$ : the action of zero on  $\rho$  equals 0. Formally:  $\text{applyMat } \text{zero } \rho = 0$ .

**Proof.** The goal is simplified using the definition of the action on a matrix and the definition of the zero.

#### Lean 4 source `QLambda/KrausFamily.lean`

```
@[simp] theorem applyMat_zero (? : Matrix (Fin n) (Fin n) ?) :
  applyMat (zero : KrausFamily n m) ? = 0 := by
  simp [applyMat, zero]
```

### 3.2.46 Action on a matrix of the empty list for Kraus families

**Statement.** For a matrix  $\rho$ : the action of  $[]$  on  $\rho$  equals 0. Formally:  $\text{applyMat } [] \ \rho = 0$ .

**Proof.** The goal is simplified using the definition of the action on a matrix.

#### Lean 4 source `QLambda/KrausFamily.lean`

```
@[simp] theorem applyMat_nil (? : Matrix (Fin n) (Fin n) ?) :
  applyMat ([] : KrausFamily n m) ? = 0 := by
  simp [applyMat]
```

### 3.2.47 Action on a matrix of a single-entry element for Kraus families

**Statement.** For a matrix  $\rho$ : the action of  $[A]$  on  $\rho$  equals  $A * \rho * A^\dagger$ .

**Proof.** The goal is simplified using the definition of the action on a matrix.

**Lean 4 source** [QLambda/KrausFamily.lean](#)

```
@[simp] theorem applyMat_single (A : KrausOperator n m)
  (? : Matrix (Fin n) (Fin n) ?) :
  applyMat [A] ? = A * ? * A? := by
  simp [applyMat]
```

### 3.2.48 Action on a matrix of an extended list for Kraus families

**Statement.** For the Kraus family  $K$ , a matrix  $\rho$ : the action of a of  $::$  and  $K$  on  $\rho$  equals the sum of  $A * \rho * A^\dagger$  and the action of  $K$  on  $\rho$ .

**Proof.** The goal is simplified using the definition of the action on a matrix.

**Lean 4 source** [QLambda/KrausFamily.lean](#)

```
theorem applyMat_cons (A : KrausOperator n m) (K : KrausFamily n m)
  (? : Matrix (Fin n) (Fin n) ?) :
  applyMat (A :: K) ? = A * ? * A? + applyMat K ? := by
  simp [applyMat]
```

### 3.2.49 Action on a matrix of a concatenation for Kraus families

**Statement.** For Kraus families  $K, L$ , a matrix  $\rho$ : the action of the concatenation of  $K$  and  $L$  on  $\rho$  equals the sum of the action of  $K$  on  $\rho$  and the action of  $L$  on  $\rho$ .

**Proof.** By induction on the Kraus family  $K$ . For the empty split, the claim is checked directly; for a context extended by one cell, the claim follows from the induction hypothesis. The goal is simplified using the definition of the action on a matrix, the action on a matrix of an extended list for Kraus families and the fact that addition for finitely supported sums is associative.

**Lean 4 source** [QLambda/KrausFamily.lean](#)

```
theorem applyMat_append (K L : KrausFamily n m)
  (? : Matrix (Fin n) (Fin n) ?) :
  applyMat (K ++ L) ? = applyMat K ? + applyMat L ? := by
  induction K with
  | nil => simp [applyMat]
  | cons A K ih =>
    simp [applyMat_cons, ih, add_assoc]
```

### 3.2.50 Action on a matrix of the flat map for Kraus families

**Statement.** For a matrix  $\rho$ : the action of the flat map of  $f$  on  $\rho$  equals  $(xs.map fun x => applyMat (f x) \rho).sum$ .

**Proof.** By induction on  $xs$ . For the empty context, the claim is checked directly; for a context extended by one cell, the claim follows from the induction hypothesis. The key step rewrites with the definition of

the action on a matrix, standard identities for lists and the action on a matrix of a concatenation for Kraus families.

#### Lean 4 source `QLambda/KrausFamily.lean`

```
theorem applyMat_flatMap {a : Type*} (xs : List a)
  (f : a -> KrausFamily n m) (? : Matrix (Fin n) (Fin n) ?) :
  applyMat (xs.flatMap f) ? = (xs.map fun x => applyMat (f x) ?).sum := by
  induction xs with
  | nil => simp [applyMat]
  | cons x xs ih =>
    simp only [List.flatMap_cons, List.map_cons, List.sum_cons]
    rw [applyMat_append, ih]
```

### 3.2.51 Reflexivity of the residual refinement

**Statement.** For the Kraus family  $K$ :  $K$  refines  $K$  residually. Formally: `ResidualRefines K K`.

**Proof.** Each component of the claim is established separately. The goal is closed by simplification with the defining equations.

#### Lean 4 source `QLambda/KrausFamily.lean`

```
theorem residualRefines_refl (K : KrausFamily n m) :
  ResidualRefines K K := by
  refine <[], ?_>
  intro ?
  simp
```

### 3.2.52 Residual refinement for Kraus families, assuming semantic equality

**Statement.** For Kraus families  $K, L$ : if  $K$  and  $L$  have the same semantics, then  $K$  refines  $L$  residually.

**Proof.** Each component of the claim is established separately. The goal is closed by simplification with the defining equations.

#### Lean 4 source `QLambda/KrausFamily.lean`

```
theorem residualRefines_of_semEq {K L : KrausFamily n m}
  (hKL : SemEq K L) : ResidualRefines K L := by
  refine <[], fun ? => ?_>
  simp using (hKL ?).symm
```

### 3.2.53 Residual refinement of the antisymm rel for Kraus families, assuming semantic equality

**Statement.** For Kraus families  $K, L$ : if  $K$  and  $L$  have the same semantics, then  $K$  and  $L$  are equivalent under `ResidualRefines`.

**Proof.** The witness is assembled directly from its components, using the residual refinement for Kraus families, assuming semantic equality.

#### Lean 4 source `QLambda/KrausFamily.lean`

```

theorem residualRefines_antisymmRel_of_semEq {K L : KrausFamily n m}
  (hKL : SemEq K L) :
  AntisymmRel ResidualRefines K L :=
  <residualRefines_of_semEq hKL,
  residualRefines_of_semEq (applySemEq_symm hKL)>

```

### 3.2.54 Transitivity of the residual refinement

**Statement.** For Kraus families  $K, L, M$ : if  $K$  refines  $L$  residually and  $L$  refines  $M$  residually, then  $K$  refines  $M$  residually.

**Proof.** The claim follows from a chain of equalities (or inequalities). Each component of the claim is established separately. The hypotheses are unpacked into their constituent data. The key step rewrites with standard identities for lists and the action on a matrix of a concatenation for Kraus families.

#### Lean 4 source `QLambda/KrausFamily.lean`

```

theorem residualRefines_trans {K L M : KrausFamily n m}
  (hKL : ResidualRefines K L) (hLM : ResidualRefines L M) :
  ResidualRefines K M := by
  obtain <R, hR> := hKL
  obtain <S, hS> := hLM
  refine <R ++ S, fun ? => ?_>
  rw [ <- List.append_assoc, applyMat_append, applyMat_append ]
  calc
    applyMat M ? = applyMat (L ++ S) ? := hS ?
    _ = applyMat L ? + applyMat S ? := applyMat_append L S ?
    _ = applyMat (K ++ R) ? + applyMat S ? := congrArg (* + applyMat S ?) (hR ?)
    _ = (applyMat K ? + applyMat R ?) + applyMat S ? := by
      rw [applyMat_append]

```

### 3.2.55 Action on a matrix of an identity

**Statement.** For a matrix  $\rho$ : the action of the identity on dimension  $n$  on  $\rho$  equals  $\rho$ .

**Proof.** The goal is simplified using the definition of the identity and the definition of the action on a matrix.

#### Lean 4 source `QLambda/KrausFamily.lean`

```

@[simp] theorem applyMat_identity (? : Matrix (Fin n) (Fin n) ?) :
  applyMat (identity n) ? = ? := by
  simp [identity, applyMat]

```

### 3.2.56 Action on a matrix of a sum for Kraus families

**Statement.** For the Kraus family  $K$ , matrixes  $\rho, \sigma$ : the action of  $K$  on the sum of  $\rho$  and  $\sigma$  equals the sum of the action of  $K$  on  $\rho$  and the action of  $K$  on  $\sigma$ .

**Proof.** By induction on the Kraus family  $K$ . For the empty split, the claim is checked directly; for a context extended by one cell, the claim follows from the induction hypothesis. The key step rewrites with

the definition of the action on a matrix, the action on a matrix of an extended list for Kraus families and standard identities for matrices.

#### Lean 4 source `QLambda/KrausFamily.lean`

```
theorem applyMat_add (K : KrausFamily n m)
  (? sigma : Matrix (Fin n) (Fin n) ?) :
  applyMat K (? + sigma) = applyMat K ? + applyMat K sigma := by
  induction K with
  | nil => simp [applyMat]
  | cons A K ih =>
    rw [applyMat_cons, applyMat_cons, applyMat_cons, ih]
    have hA :
      A * (? + sigma) * A.conjTranspose =
      A * ? * A.conjTranspose + A * sigma * A.conjTranspose := by
    let A' : Matrix (Fin m) (Fin n) ? := A
    change A' * (? + sigma) * A'.conjTranspose =
      A' * ? * A'.conjTranspose + A' * sigma * A'.conjTranspose
    rw [Matrix.mul_add A' ? sigma, Matrix.add_mul (A' * ?) (A' * sigma) A'.
      conjTranspose]
    rw [hA]
    ac_rfl
```

### 3.2.57 Action on a matrix of a scalar multiple for Kraus families

**Statement.** For the Kraus family  $K$ , a complex number  $c$ , a matrix  $\rho$ : the action of  $K$  on  $c \cdot \rho$  equals the action of  $K$  on  $\rho$  scaled by  $c$ .

**Proof.** By induction on the Kraus family  $K$ . For the empty split, the claim is checked directly; for a context extended by one cell, the claim follows from the induction hypothesis. The key step rewrites with the definition of the action on a matrix, the action on a matrix of an extended list for Kraus families, standard identities for matrices and the usual algebraic identities.

#### Lean 4 source `QLambda/KrausFamily.lean`

```
theorem applyMat_smul (K : KrausFamily n m) (c : ?)
  (? : Matrix (Fin n) (Fin n) ?) :
  applyMat K (c * ?) = c * applyMat K ? := by
  induction K with
  | nil => simp [applyMat]
  | cons A K ih =>
    rw [applyMat_cons, applyMat_cons, ih]
    have : A * (c * ?) * A.conjTranspose = c * (A * ? * A.conjTranspose) := by
    let A' : Matrix (Fin m) (Fin n) ? := A
    change A' * (c * ?) * A'.conjTranspose = c * (A' * ? * A'.conjTranspose)
    rw [Matrix.mul_smul A' c ?, Matrix.smul_mul c (A' * ?) A'.conjTranspose]
    rw [this, smul_add]
```

### 3.2.58 Action on a matrix of a difference for Kraus families

**Statement.** For the Kraus family  $K$ , matrixes  $\rho, \sigma$ : the action of  $K$  on the difference of  $\rho$  and  $\sigma$  equals the difference of the action of  $K$  on  $\rho$  and the action of  $K$  on  $\sigma$ .

**Proof.** The key step rewrites with the usual algebraic identities, the action on a matrix of a sum for Kraus families and the action on a matrix of a scalar multiple for Kraus families.

#### Lean 4 source `QLambda/KrausFamily.lean`

```
theorem applyMat_sub (K : KrausFamily n m)
  (? sigma : Matrix (Fin n) (Fin n) ?) :
  applyMat K (? - sigma) = applyMat K ? - applyMat K sigma := by
  rw [sub_eq_add_neg, applyMat_add, <- neg_one_smul ? sigma, applyMat_smul,
      neg_one_smul, sub_eq_add_neg]
```

### 3.2.59 Action on a matrix of a mapped family of a product

**Statement.** For a natural number  $\ell$ , the Kraus family  $K$ , a matrix  $\rho$ : the action of the product of the functorial action of  $\text{fun } A \Rightarrow B$  and  $A$  on  $\rho$  equals  $B * \text{applyMat } K \rho * B^\dagger$ .

**Proof.** By induction on the Kraus family  $K$ . For the empty split, the claim is checked directly; for a context extended by one cell, the claim follows from the induction hypothesis. The key step rewrites with the definition of the action on a matrix, standard identities for lists, the action on a matrix of an extended list for Kraus families and the usual algebraic identities.

#### Lean 4 source `QLambda/KrausFamily.lean`

```
theorem applyMat_map_mul {? : Nat} (B : KrausOperator m ?)
  (K : KrausFamily n m) (? : Matrix (Fin n) (Fin n) ?) :
  applyMat (K.map fun A => B * A) ? = B * applyMat K ? * B? := by
  induction K with
  | nil => simp [applyMat]
  | cons A K ih =>
    rw [List.map_cons, applyMat_cons, applyMat_cons, ih, conjTranspose_mul]
    have hA :
      B * A * ? * (A.conjTranspose * B.conjTranspose) =
      B * (A * ? * A.conjTranspose) * B.conjTranspose := by
      let A' : Matrix (Fin m) (Fin n) ? := A
      let B' : Matrix (Fin ?) (Fin m) ? := B
      simp [Matrix.mul_assoc]
    have hsum :
      B * (A * ? * A.conjTranspose) * B.conjTranspose +
      B * applyMat K ? * B.conjTranspose =
      B * (A * ? * A.conjTranspose + applyMat K ?) * B.conjTranspose := by
      let B' : Matrix (Fin ?) (Fin m) ? := B
      let X : Matrix (Fin m) (Fin m) ? := A * ? * A.conjTranspose
      let Y : Matrix (Fin m) (Fin m) ? := applyMat K ?
      change B' * X * B'.conjTranspose + B' * Y * B'.conjTranspose =
      B' * (X + Y) * B'.conjTranspose
      rw [Matrix.mul_add B' X Y, Matrix.add_mul (B' * X) (B' * Y) B'.conjTranspose]
    rw [hA, hsum]
```

### 3.2.60 Action on a matrix of a composition

**Statement.** For a natural number  $\ell$ , Kraus families  $L, K$ , a matrix  $\rho$ : the action of the composite of  $L$  after  $K$  on  $\rho$  equals the action of  $L$  on the action of  $K$  on  $\rho$ .

**Proof.** By induction on the Kraus family  $L$ . For the empty split, the claim is checked directly; for a context extended by one cell, the claim follows from the induction hypothesis. The key step rewrites with the definition of the composition, the definition of the action on a matrix, standard identities for lists and the action on a matrix of a concatenation for Kraus families.

#### Lean 4 source `QLambda/KrausFamily.lean`

```
theorem applyMat_comp {? : Nat} (L : KrausFamily m ?) (K : KrausFamily n m)
  (? : Matrix (Fin n) (Fin n) ?) :
  applyMat (comp L K) ? = applyMat L (applyMat K ?) := by
  induction L with
  | nil => simp [comp, applyMat]
  | cons B L ih =>
    rw [comp, List.flatMap_cons, applyMat_append, applyMat_map_mul]
    change B * applyMat K ? * B? + applyMat (comp L K) ? =
      applyMat (B :: L) (applyMat K ?)
    rw [ih, applyMat_cons]
```

### 3.2.61 Coordinate formula for the Choi matrix of sequential composition

**Statement.** Coordinate formula for the Choi matrix of sequential composition. Formally:  $\text{choi } (\text{comp } L \ K) (a, i) (b, j) = \sum x, \sum y, \text{choi } L (a, x) (b, y) * \text{choi } K (x, i) (y, j)$ .

**Proof.** The key step rewrites with the fact that each Choi entry is an output matrix entry obtained by applying the represented CP map to a matrix unit, the action on a matrix of a composition, the fact that every output coordinate is the contraction of the input matrix with the corresponding block of the Choi matrix and the sum of a congruence.

#### Lean 4 source `QLambda/KrausFamily.lean`

```
theorem choi_comp_apply {? : Nat} (L : KrausFamily m ?)
  (K : KrausFamily n m) (a b : Fin ?) (i j : Fin n) :
  choi (comp L K) (a, i) (b, j) =
    ? x, ? y, choi L (a, x) (b, y) * choi K (x, i) (y, j) := by
  rw [ <- applyMat_matrixUnit (comp L K) (a, i) (b, j), applyMat_comp,
    applyMat_apply]
  apply Finset.sum_congr rfl
  intro x _
  apply Finset.sum_congr rfl
  intro y _
  rw [applyMat_matrixUnit K (x, i) (y, j)]
```

### 3.2.62 Action on a matrix of a scale

**Statement.** For a complex number  $c$ , the Kraus family  $K$ , a matrix  $\rho$ : the action of the scale of  $c$  and  $K$  on  $\rho$  equals the action of  $K$  on  $\rho$  scaled by the product of  $c$  and the adjoint of  $c$ .

**Proof.** By induction on the Kraus family  $K$ . For the empty split, the claim is checked directly; for a context extended by one cell, the claim follows from the induction hypothesis. The key step rewrites with the definition of the scale, the definition of the action on a matrix, standard identities for lists and the action on a matrix of an extended list for Kraus families.



### Lean 4 source `QLambda/KrausFamily.lean`

```
theorem applyMat_scale (c : ?) (K : KrausFamily n m)
  (? : Matrix (Fin n) (Fin n) ?) :
  applyMat (scale c K) ? = (c * star c) * applyMat K ? := by
induction K with
| nil => simp [scale, applyMat]
| cons A K ih =>
  simp only [scale, List.map_cons, applyMat_cons] at ih |-
  rw [ih, conjTranspose_smul]
  have hA :
    (c * A) * ? * (star c * A.conjTranspose) =
    (c * star c) * (A * ? * A.conjTranspose) := by
  let A' : Matrix (Fin m) (Fin n) ? := A
  change (c * A') * ? * (star c * A'.conjTranspose) =
    (c * star c) * (A' * ? * A'.conjTranspose)
  rw [Matrix.smul_mul, Matrix.mul_smul, Matrix.smul_mul, smul_smul,
    mul_comm (star c) c]
  rw [hA, smul_add]
```

### 3.2.63 The operator-sum of a Kraus family is completely positive

**Statement.** The operator-sum of a Kraus family is completely positive. Formally:  $(\text{applyMat } K \ \rho) . \text{PosSemidef}$ .

**Proof.** By induction on the Kraus family  $K$ . For the empty split, the claim is checked directly; for a context extended by one cell, the claim follows from the induction hypothesis. The key step rewrites with the definition of the action on a matrix, the action on a matrix of an extended list for Kraus families and the hypothesis that  $\rho$  is positive semidefinite.

### Lean 4 source `QLambda/KrausFamily.lean`

```
theorem applyMat_posSemidef (K : KrausFamily n m)
  {? : Matrix (Fin n) (Fin n) ?} (h? : ?.PosSemidef) :
  (applyMat K ?).PosSemidef := by
induction K with
| nil =>
  simpa [applyMat] using PosSemidef.zero (n := Fin m) (R := ?)
| cons A K ih =>
  rw [applyMat_cons]
  exact (h?.mul_mul_conjTranspose_same A).add ih
```

### 3.2.64 Operator-sum is Loewner-monotone

**Statement.** Operator-sum is Loewner-monotone. Formally:  $\text{applyMat } K \ \rho \leq \text{applyMat } K \ \sigma$ .

**Proof.** The key step rewrites with the action on a matrix of a difference for Kraus families and the fact that the operator-sum of a Kraus family is completely positive.

### Lean 4 source `QLambda/KrausFamily.lean`

```
theorem applyMat_mono (K : KrausFamily n m)
  {? sigma : Matrix (Fin n) (Fin n) ?} (h : ? <= sigma) :
  applyMat K ? <= applyMat K sigma := by
```

```

change (applyMat K sigma - applyMat K ?).PosSemidef
rw [ <- applyMat_sub]
exact applyMat_posSemidef K h

```

### 3.2.65 Identity of a composite for Kraus families

**Statement.** For the Kraus family  $K$ : the composite of the identity on dimension  $m$  after  $K$  equals  $K$ .

**Proof.** The goal is simplified using the definition of the composition and the definition of the identity.

**Lean 4 source** [QLambda/KrausFamily.lean](#)

```

@[simp] theorem identity_comp (K : KrausFamily n m) :
  comp (identity m) K = K := by
  simp [comp, identity]

```

### 3.2.66 Composition of the identity for Kraus families

**Statement.** For the Kraus family  $K$ : the composite of  $K$  after the identity on dimension  $n$  equals  $K$ .

**Proof.** The goal is simplified using the definition of the composition and the definition of the identity.

**Lean 4 source** [QLambda/KrausFamily.lean](#)

```

@[simp] theorem comp_identity (K : KrausFamily n m) :
  comp K (identity n) = K := by
  simp [comp, identity]

```

### 3.2.67 The functorial action for Kraus families preserves composition

**Statement.** For natural numbers  $\ell, r$ , Kraus families  $L, K$ :  $(\text{comp } L \ K) \cdot \text{map } (\text{fun } A \Rightarrow C * A)$  equals the composite of the functorial action of  $\text{fun } B \Rightarrow C * B$  after  $K$ .

**Proof.** By induction on the Kraus family  $L$ . For the empty split, the claim is checked directly; for a context extended by one cell, the claim follows from the induction hypothesis. The key step rewrites with the definition of the composition, standard identities for lists, the fact that mapping distributes over concatenation and standard identities for functions.

**Lean 4 source** [QLambda/KrausFamily.lean](#)

```

theorem map_comp {? r : Nat} (C : KrausOperator ? r)
  (L : KrausFamily m ?) (K : KrausFamily n m) :
  (comp L K).map (fun A => C * A) = comp (L.map (fun B => C * B)) K := by
  induction L with
  | nil => simp [comp]
  | cons B L ih =>
    simp only [comp, List.flatMap_cons, List.map_append, List.map_map,
      Function.comp_def]
    have hmul :
      K.map (fun x => C * (B * x)) = K.map (fun A => C * B * A) :=
      List.map_congr_left fun a _ => by
        let C' : Matrix (Fin r) (Fin ?) ? := C
        let B' : Matrix (Fin ?) (Fin m) ? := B

```

```

      change C' * (B' * a) = C' * B' * a
      exact (Matrix.mul_assoc C' B' a).symm
    rw [hmul]
  change
    K.map (fun A => C * B * A) ++ (comp L K).map (fun A => C * A) =
      comp ((C * B) :: L.map (fun B => C * B)) K
  rw [ih]
  simp [comp, List.flatMap_cons]

```

### 3.2.68 Composition of a concatenation for Kraus families

**Statement.** For a natural number  $\ell$ , Kraus families  $L_1, L_2, K$ : the composite of the concatenation of  $L_1$  and  $L_2$  after  $K$  equals the concatenation of the composite of  $L_1$  after  $K$  and the composite of  $L_2$  after  $K$ .

**Proof.** The goal is simplified using the definition of the composition and standard identities for lists.

#### Lean 4 source `QLambda/KrausFamily.lean`

```

theorem comp_append {? : Nat} (L_1 L_2 : KrausFamily m ?) (K : KrausFamily n m) :
  comp (L_1 ++ L_2) K = comp L_1 K ++ comp L_2 K := by
  simp [comp, List.flatMap_append]

```

### 3.2.69 Composition for Kraus families is associative

**Statement.** For natural numbers  $\ell, r$ , Kraus families  $M, L, K$ : the composite of  $M$  after the composite of  $L$  after  $K$  equals the composite of the composite of  $M$  after  $L$  after  $K$ .

**Proof.** By induction on the Kraus family  $M$ . For the empty split, the claim is checked directly; for a context extended by one cell, the claim follows from the induction hypothesis. The key step rewrites with the definition of the composition, the fact that the functorial action for Kraus families preserves composition and the composition of a concatenation for Kraus families.

#### Lean 4 source `QLambda/KrausFamily.lean`

```

theorem comp_assoc {? r : Nat} (M : KrausFamily ? r)
  (L : KrausFamily m ?) (K : KrausFamily n m) :
  comp M (comp L K) = comp (comp M L) K := by
  induction M with
  | nil => simp [comp]
  | cons C M ih =>
    change
      (comp L K).map (fun A => C * A) ++ comp M (comp L K) =
        comp (comp (C :: M) L) K
  rw [map_comp, ih, <- comp_append]
  rfl

```

### 3.2.70 Residual CP refinement is preserved by postcomposition

**Statement.** Residual CP refinement is preserved by postcomposition. Formally: `ResidualRefines (comp M K) (comp M L)`.

**Proof.** The claim follows from a chain of equalities (or inequalities). Each component of the claim is established separately. The hypotheses are unpacked into their constituent data. The key step rewrites with the action on a matrix of a concatenation for Kraus families and the action on a matrix of a composition.

#### Lean 4 source `QLambda/KrausFamily.lean`

```
theorem residualRefines_comp_left {? : Nat} (M : KrausFamily m ?)
  {K L : KrausFamily n m} (hKL : ResidualRefines K L) :
  ResidualRefines (comp M K) (comp M L) := by
  obtain <R, hR> := hKL
  refine <comp M R, fun ? => ?_>
  rw [applyMat_append, applyMat_comp, applyMat_comp, applyMat_comp]
  calc
    applyMat M (applyMat L ?) =
      applyMat M (applyMat (K ++ R) ?) := congrArg (applyMat M) (hR ?)
    _ = applyMat M (applyMat K ? + applyMat R ?) := by
      rw [applyMat_append]
    _ = applyMat M (applyMat K ?) + applyMat M (applyMat R ?) :=
      applyMat_add M _ _
```

### 3.2.71 Residual CP refinement is preserved by precomposition

**Statement.** Residual CP refinement is preserved by precomposition. Formally: `ResidualRefines (comp K M) (comp L M)`.

**Proof.** Each component of the claim is established separately. The hypotheses are unpacked into their constituent data. The key step rewrites with the composition of a concatenation for Kraus families and the action on a matrix of a composition.

#### Lean 4 source `QLambda/KrausFamily.lean`

```
theorem residualRefines_comp_right {? : Nat} (M : KrausFamily ? n)
  {K L : KrausFamily n m} (hKL : ResidualRefines K L) :
  ResidualRefines (comp K M) (comp L M) := by
  obtain <R, hR> := hKL
  refine <comp R M, fun ? => ?_>
  rw [ <- comp_append, applyMat_comp, applyMat_comp ]
  exact hR (applyMat M ?)
```

### 3.2.72 Residual refinement is additive in the left summand

**Statement.** Residual refinement is additive in the left summand. Formally: `ResidualRefines (M ++ K) (M ++ L)`.

**Proof.** The claim follows from a chain of equalities (or inequalities). Each component of the claim is established separately. The hypotheses are unpacked into their constituent data. The key step rewrites with the action on a matrix of a concatenation for Kraus families.

#### Lean 4 source `QLambda/KrausFamily.lean`

```
theorem residualRefines_append_left (M : KrausFamily n m)
  {K L : KrausFamily n m} (hKL : ResidualRefines K L) :
  ResidualRefines (M ++ K) (M ++ L) := by
```

```

obtain <R, hR> := hKL
refine <R, fun ? => ?_>
have hR? := hR ?
rw [applyMat_append] at hR?
simp only [applyMat_append]
calc
  applyMat M ? + applyMat L ? =
    applyMat M ? + (applyMat K ? + applyMat R ?) :=
      congrArg (applyMat M ? + *) hR?
  _ = (applyMat M ? + applyMat K ?) + applyMat R ? :=
    (add_assoc _ _ _).symm

```

### 3.2.73 Residual refinement is additive in the right summand

**Statement.** Residual refinement is additive in the right summand. Formally:  $\text{ResidualRefines } (K ++ M) (L ++ M)$ .

**Proof.** The claim follows from a chain of equalities (or inequalities). Each component of the claim is established separately. The hypotheses are unpacked into their constituent data. The key step rewrites with the action on a matrix of a concatenation for Kraus families.

#### Lean 4 source `QLambda/KrausFamily.lean`

```

theorem residualRefines_append_right (M : KrausFamily n m)
  {K L : KrausFamily n m} (hKL : ResidualRefines K L) :
  ResidualRefines (K ++ M) (L ++ M) := by
  obtain <R, hR> := hKL
  refine <R, fun ? => ?_>
  simp only [applyMat_append]
  calc
    applyMat L ? + applyMat M ? =
      (applyMat K ? + applyMat R ?) + applyMat M ? := by
        rw [ <- applyMat_append K R, <- hR ? ]
    _ = (applyMat K ? + applyMat M ?) + applyMat R ? := by
      ac_rfl

```

### 3.2.74 Residual refinement of a concatenation for Kraus families

**Statement.** For Kraus families  $K_1, K_2, L_1, L_2$ : if  $K_1$  refines  $L_1$  residually and  $K_2$  refines  $L_2$  residually, then  $K_1 ++ K_2$  refines  $L_1 ++ L_2$  residually.

**Proof.** This is an instance of the transitivity of the residual refinement.

#### Lean 4 source `QLambda/KrausFamily.lean`

```

theorem residualRefines_append {K_1 K_2 L_1 L_2 : KrausFamily n m}
  (h_1 : ResidualRefines K_1 L_1) (h_2 : ResidualRefines K_2 L_2) :
  ResidualRefines (K_1 ++ K_2) (L_1 ++ L_2) :=
  residualRefines_trans
    (residualRefines_append_right K_2 h_1)
    (residualRefines_append_left L_1 h_2)

```

### 3.2.75 Residual refinement of the flat map for Kraus families

**Statement.** If for every  $x, \in, xs, f \ x$  refines  $g \ x$  residually, then  $xs.flatMap \ f$  refines  $xs.flatMap \ g$  residually.

**Proof.** By induction on  $xs$ . For the empty context, the claim is checked directly; for a context extended by one cell, the claim follows from the induction hypothesis. The goal is simplified using standard identities for lists, the reflexivity of the residual refinement and the residual refinement of a concatenation for Kraus families.

#### Lean 4 source `QLambda/KrausFamily.lean`

```
theorem residualRefines_flatMap {a : Type*} (xs : List a)
  {f g : a -> KrausFamily n m}
  (hfg : forall x in xs, ResidualRefines (f x) (g x)) :
  ResidualRefines (xs.flatMap f) (xs.flatMap g) := by
  induction xs with
  | nil =>
    exact residualRefines_refl []
  | cons x xs ih =>
    simp only [List.flatMap_cons]
    exact residualRefines_append
      (hfg x (by simp))
      (ih fun y hy => hfg y (by simp [hy]))
```

### 3.2.76 If $A$ is an isometry ( $A^\dagger A = I$ ), the one-element family is trace-preserving

**Statement.** If  $A$  is an isometry ( $A^\dagger A = I$ ), the one-element family is trace-preserving. Formally:  $\text{tr}(\text{applyMat } [A] \ \rho) = \text{tr } \rho$ .

**Proof.** The key step rewrites with the action on a matrix of a single-entry element for Kraus families, cyclicity of the trace, associativity of matrix multiplication and the hypothesis that  $A^\dagger * A = 1$ .

#### Lean 4 source `QLambda/KrausFamily.lean`

```
theorem trace_applyMat_isometry {k : Nat} (A : KrausOperator n k)
  (hA : A? * A = 1) (? : Matrix (Fin n) (Fin n) ?) :
  Matrix.trace (applyMat [A] ?) = Matrix.trace ? := by
  rw [applyMat_single, Matrix.trace_mul_comm (A * ?) A?, <- Matrix.mul_assoc,
    hA, Matrix.one_mul]
```

### 3.2.77 A fixed finite quantum register and a quantum-kernel control state

**Definition.** A fixed finite quantum register and a quantum-kernel control state. `frame` records live wires owned by the surrounding source evaluation context; control-owned wires are tracked structurally.

**Construction.** An element consists of `state`, `frame` and `control`.

#### Lean 4 source `QLambda/Linear/Config.lean`

```
structure Config (q : Nat) where
  state : RegisterState q
  frame : Finset (Fin q)
  control : Control q
```

### 3.2.78 Definition of the live of runtime configurations

**Definition.** The live of  $s$  is an element of  $\text{Finset } (\text{Fin } q)$ .

**Construction.** Defined to be the frame of  $\cup$  and the wires.

**Lean 4 source** [QLambda/Linear/Config.lean](#)

```
def live (s : Config q) : Finset (Fin q) :=
  s.frame ∪ s.control.wires
```

### 3.2.79 Static configuration typing: the control has the requested source type

**Definition.** Static configuration typing: the control has the requested source type, contains no aliased wire, and is disjoint from wires owned by its frame.

**Construction.** Defined by an explicit formula built from the type, the valid and the wires.

**Lean 4 source** [QLambda/Linear/Config.lean](#)

```
def WellTyped (s : Config q) (A : Ty) : Prop :=
  s.control.typeOf = some A /\
  s.control.Valid /\
  Disjoint s.control.wires s.frame
```

### 3.2.80 A final runtime configuration contains a returned value

**Definition.** A final runtime configuration contains a returned value.

**Construction.** Defined to be  $\exists \text{ value}, s.\text{control} = .\text{ret value}$ .

**Lean 4 source** [QLambda/Linear/Config.lean](#)

```
def Normal (s : Config q) : Prop :=
  exists value, s.control = .ret value
```

### 3.2.81 Allocation is the only capacity-sensitive request

**Definition.** Allocation is the only capacity-sensitive request.

**Construction.** Defined to be  $s.\text{control} = .\text{app } (.prim.\text{new0}) .\text{unit} \wedge \forall w : \text{Fin } q, w \in s.\text{live}$ .

**Lean 4 source** [QLambda/Linear/Config.lean](#)

```
def OutOfWires (s : Config q) : Prop :=
  s.control = .app (.prim.new0) .unit /\ forall w : Fin q, w in s.live
```

### 3.2.82 The zero ket equals a zero-qubit allocation matrix

**Statement.** The zero ket equals the zero-qubit allocation matrix at 0.

**Proof.** Both sides are compared pointwise (by extensionality). The goal is simplified using the definition of the zero ket and the definition of the zero-qubit allocation matrix.

**Lean 4 source** [QLambda/Linear/PrimitiveSuperoperator.lean](#)

```
theorem ketZero_eq_allocZeroMatrix :  
  ketZero = CompletedCP.allocZeroMatrix 0 := by  
  ext i j  
  simp [ketZero, CompletedCP.allocZeroMatrix]
```

### 3.2.83 Definition of the primitive superoperator

**Definition.** The primitive superoperator of  $p$  is a superoperator from  $\mathcal{QDim} \ p.inputQ$  to  $\mathcal{QDim} \ p.outputQ$ .

**Construction.** Defined by cases on the input:  $.new0 \mapsto$  the allocation of a fresh zero qubit beside 0 existing qubits;  $.x \mapsto$  the Pauli-X gate on wire 0;  $.h \mapsto$  the Hadamard gate on wire 0;  $.t \mapsto$  the T gate on wire 0;  $.ry \ \theta \mapsto$  the Y-rotation by angle  $\theta$  on wire 0;  $.cx \mapsto$  the controlled-NOT gate with control 0 and target 1;  $.reset \mapsto$  the reset of wire 0.

**Lean 4 source** [QLambda/Linear/PrimitiveSuperoperator.lean](#)

```
noncomputable def superoperator (p : Prim) :  
  Superoperator (CQ.QDim p.inputQ) (CQ.QDim p.outputQ) :=  
  match p with  
  | .new0 => Superoperator.allocateZero 0  
  | .x => Superoperator.x (0 : Fin 1)  
  | .h => Superoperator.h (0 : Fin 1)  
  | .t => Superoperator.t (0 : Fin 1)  
  | .ry ? => Superoperator.ry (? : ?) (0 : Fin 1)  
  | .cx => Superoperator.cx (0 : Fin 2) (1 : Fin 2)  
  | .reset => Superoperator.reset (0 : Fin 1)
```

### 3.2.84 Allocation of a fresh zero qubit as a primitive superoperator

**Statement.** The primitive superoperator of fresh-qubit allocation equals the allocation of a fresh zero qubit beside 0 existing qubits.

**Proof.** By definition. The left-hand side is the primitive superoperator of fresh-qubit allocation; the primitive superoperator is defined by cases, and its defining clause for fresh-qubit allocation returns the allocation of a fresh zero qubit beside 0 existing qubits, which is literally the right-hand side. No computation beyond unfolding this clause is needed.

**Lean 4 source** [QLambda/Linear/PrimitiveSuperoperator.lean](#)

```
theorem superoperator_new0 :  
  superoperator .new0 = Superoperator.allocateZero 0 :=  
  rfl
```



### 3.2.85 Primitive superoperator of the Pauli-X gate

**Statement.** The primitive superoperator of the Pauli-X gate equals the Pauli-X gate on wire 0.

**Proof.** By definition. The left-hand side is the primitive superoperator of the Pauli-X gate; the primitive superoperator is defined by cases, and its defining clause for the Pauli-X gate returns the Pauli-X gate on wire 0, which is literally the right-hand side. No computation beyond unfolding this clause is needed.

**Lean 4 source** [QLambda/Linear/PrimitiveSuperoperator.lean](#)

```
theorem superoperator_x :  
  superoperator .x = Superoperator.x (0 : Fin 1) :=  
  rfl
```

### 3.2.86 Primitive superoperator of the Hadamard gate

**Statement.** The primitive superoperator of the Hadamard gate equals the Hadamard gate on wire 0.

**Proof.** By definition. The left-hand side is the primitive superoperator of the Hadamard gate; the primitive superoperator is defined by cases, and its defining clause for the Hadamard gate returns the Hadamard gate on wire 0, which is literally the right-hand side. No computation beyond unfolding this clause is needed.

**Lean 4 source** [QLambda/Linear/PrimitiveSuperoperator.lean](#)

```
theorem superoperator_h :  
  superoperator .h = Superoperator.h (0 : Fin 1) :=  
  rfl
```

### 3.2.87 Primitive superoperator of the T gate

**Statement.** The primitive superoperator of the T gate equals the T gate on wire 0.

**Proof.** By definition. The left-hand side is the primitive superoperator of the T gate; the primitive superoperator is defined by cases, and its defining clause for the T gate returns the T gate on wire 0, which is literally the right-hand side. No computation beyond unfolding this clause is needed.

**Lean 4 source** [QLambda/Linear/PrimitiveSuperoperator.lean](#)

```
theorem superoperator_t :  
  superoperator .t = Superoperator.t (0 : Fin 1) :=  
  rfl
```

### 3.2.88 Primitive superoperator of a Y-rotation

**Statement.** For a rational number  $\theta$ : the primitive superoperator of the Y-rotation gate of  $\theta$  equals the Y-rotation by angle  $\theta$  on wire 0.

**Proof.** By definition. The left-hand side is the primitive superoperator of the Y-rotation gate of  $\theta$ ; the primitive superoperator is defined by cases, and its defining clause for a Y-rotation returns the Y-rotation by angle  $\theta$  on wire 0, which is literally the right-hand side. No computation beyond unfolding this clause is needed.

### Lean 4 source `QLambda/Linear/PrimitiveSuperoperator.lean`

```
theorem superoperator_ry (? : ?) :  
  superoperator (.ry ?) = Superoperator.ry (? : ?) (0 : Fin 1) :=  
  rfl
```

#### 3.2.89 Primitive superoperator of the controlled-NOT gate

**Statement.** The primitive superoperator of the controlled-NOT gate equals the controlled-NOT gate with control 0 and target 1.

**Proof.** By definition. The left-hand side is the primitive superoperator of the controlled-NOT gate; the primitive superoperator is defined by cases, and its defining clause for the controlled-NOT gate returns the controlled-NOT gate with control 0 and target 1, which is literally the right-hand side. No computation beyond unfolding this clause is needed.

### Lean 4 source `QLambda/Linear/PrimitiveSuperoperator.lean`

```
theorem superoperator_cx :  
  superoperator .cx = Superoperator.cx (0 : Fin 2) (1 : Fin 2) :=  
  rfl
```

#### 3.2.90 Primitive superoperator of reset

**Statement.** The primitive superoperator of reset equals the reset of wire 0.

**Proof.** By definition. The left-hand side is the primitive superoperator of reset; the primitive superoperator is defined by cases, and its defining clause for reset returns the reset of wire 0, which is literally the right-hand side. No computation beyond unfolding this clause is needed.

### Lean 4 source `QLambda/Linear/PrimitiveSuperoperator.lean`

```
theorem superoperator_reset :  
  superoperator .reset = Superoperator.reset (0 : Fin 1) :=  
  rfl
```

#### 3.2.91 The primitive superoperator has the Kraus presentation of its primitive

**Statement.** For a primitive  $p$ :  $(\text{superoperator } p).\text{cp}$  equals the CP map with Kraus family the Kraus operators of  $p$ .

**Proof.** By case analysis on the primitive  $p$ . The key step rewrites with the allocation of a fresh zero qubit as a primitive superoperator, the underlying completely positive map of the allocation of a fresh zero qubit for superoperators, the definition of the Kraus operators and the fact that the zero ket equals a zero-qubit allocation matrix.

### Lean 4 source `QLambda/Linear/PrimitiveSuperoperator.lean`

```
theorem cp_superoperator (p : Prim) :  
  (superoperator p).cp = CMap.ofKraus p.kraus := by  
  cases p  
  * rw [superoperator_new0, Superoperator.cp_allocateZero, kraus,
```

```

    ketZero_eq_allocZeroMatrix]; rfl
* rw [superoperator_x]; rfl
* rw [superoperator_h]; rfl
* rw [superoperator_t]; rfl
* rw [superoperator_ry]; rfl
* rw [superoperator_cx]; rfl
* rw [superoperator_reset, Superoperator.cp_reset]; rfl

```

### 3.2.92 The intrinsic superoperator and the completed Kraus class of a primitive are the same first-order CP map

**Statement.** The intrinsic superoperator and the completed Kraus class of a primitive are the same first-order CP map. Formally:  $(\text{superoperator } p).\text{cp.toCompleted} = \text{completedCP } p$ .

**Proof.** The key step rewrites with the definition of the completed CP class, the fact that the primitive superoperator has the Kraus presentation of its primitive and the passage to the completed class of a map determined by a Kraus family.

**Lean 4 source** [QLambda/Linear/PrimitiveSuperoperator.lean](#)

```

theorem superoperator_completedCP (p : Prim) :
  (superoperator p).cp.toCompleted = completedCP p := by
  rw [completedCP, cp_superoperator, CPMMap.toCompleted_ofKraus]

```

### 3.2.93 Computational-basis measurement as an intrinsic two-branch instrument

**Definition.** Computational-basis measurement as an intrinsic two-branch instrument.

**Construction.** Defined to be the measurement of wire 0.

**Lean 4 source** [QLambda/Linear/PrimitiveSuperoperator.lean](#)

```

noncomputable def qubitInstrument :
  Instrument (CQ.QDim 1) (CQ.QDim 1) 2 :=
  Instrument.measure (0 : Fin 1)

```

### 3.2.94 Qubit quantum instrument of zero

**Statement.** The branch at 0 equals the passage from a completed class of the branch at 0.

**Proof.** The key step rewrites with the definition of the qubit quantum instrument, the measurement of the branch of zero for quantum instruments, the qubit measurement of zero and the passage from a completed class of the map determined by a Kraus family.

**Lean 4 source** [QLambda/Linear/PrimitiveSuperoperator.lean](#)

```

theorem qubitInstrument_zero :
  qubitInstrument.branch 0 =
    CPMMap.ofCompleted (qubitMeasurement.branch 0) := by
  rw [qubitInstrument, Instrument.measure_branch_zero,
    qubitMeasurement_zero, CPMMap.ofCompleted_ofKraus]

```

### 3.2.95 Qubit quantum instrument of one

**Statement.** The branch at 1 equals the passage from a completed class of the branch at 1.

**Proof.** The key step rewrites with the definition of the qubit quantum instrument, the measurement of the branch of one for quantum instruments, the qubit measurement of one and the passage from a completed class of the map determined by a Kraus family.

**Lean 4 source** [QLambda/Linear/PrimitiveSuperoperator.lean](#)

```
theorem qubitInstrument_one :
  qubitInstrument.branch 1 =
    CPMMap.ofCompleted (qubitMeasurement.branch 1) := by
  rw [qubitInstrument, Instrument.measure_branch_one,
    qubitMeasurement_one, CPMMap.ofCompleted_ofKraus]
```

### 3.2.96 Compiler-owned allocation state for fixed target registers

**Definition.** Compiler-owned allocation state for fixed target registers.

**Construction.** An element consists of `nextQ` and `nextC`, subject to the laws `nextQ_le` and `nextC_le`.

**Lean 4 source** [QLambda/Linear/RegFile.lean](#)

```
structure RegFile (q c : Nat) where
  nextQ : Nat
  nextC : Nat
  nextQ_le : nextQ <= q
  nextC_le : nextC <= c
```

### 3.2.97 No target register has yet been allocated

**Definition.** No target register has yet been allocated.

**Construction.** Constructed by supplying each component of the structure explicitly.

**Lean 4 source** [QLambda/Linear/RegFile.lean](#)

```
def empty (q c : Nat) : RegFile q c :=
  <0, 0, Nat.zero_le _, Nat.zero_le _>
```

### 3.2.98 The allocated quantum wires form the prefix below next quantum

**Definition.** The allocated quantum wires form the prefix below `nextQ`.

**Construction.** Defined to be the 1 of `<` and the next quantum of  $\rho$ .

**Lean 4 source** [QLambda/Linear/RegFile.lean](#)

```
def AllocatedQ {q c : Nat} (? : RegFile q c) (w : Fin q) : Prop :=
  w.1 < ?.nextQ
```

### 3.2.99 The allocated classical slots form the prefix below next classical

**Definition.** The allocated classical slots form the prefix below `nextC`.

**Construction.** Defined to be the 1 of `<` and the next classical of  $\rho$ .

**Lean 4 source** `QLambda/Linear/RegFile.lean`

```
def AllocatedC {q c : Nat} (? : RegFile q c) (b : Fin c) : Prop :=
  b.1 < ?.nextC
```

### 3.2.100 Allocate the next quantum wire, if the fixed register has room

**Definition.** Allocate the next quantum wire, if the fixed register has room.

**Construction.** Defined by an explicit formula.

**Lean 4 source** `QLambda/Linear/RegFile.lean`

```
def allocQ {q c : Nat} (? : RegFile q c) :
  Option (Fin q × RegFile q c) :=
  if h : ?.nextQ < q then
    some
      (<?.nextQ, h>,
       <?.nextQ + 1, ?.nextC, Nat.succ_le_iff.mpr h, ?.nextC_le>)
  else
    none
```

### 3.2.101 Allocate the next classical slot, if the fixed register has room

**Definition.** Allocate the next classical slot, if the fixed register has room.

**Construction.** Defined by an explicit formula.

**Lean 4 source** `QLambda/Linear/RegFile.lean`

```
def allocC {q c : Nat} (? : RegFile q c) :
  Option (Fin c × RegFile q c) :=
  if h : ?.nextC < c then
    some
      (<?.nextC, h>,
       <?.nextQ, ?.nextC + 1, ?.nextQ_le, Nat.succ_le_iff.mpr h>)
  else
    none
```

### 3.2.102 Qubit allocation of the fresh for register files

**Statement.** For natural numbers  $q, c$ , an index  $w$ : if  $\rho.\text{allocQ} = \text{some } (w, \rho')$ , then it is not the case that  $\rho.\text{AllocatedQ } w$ .

**Proof.** By case analysis on the derivation that  $\rho.\text{allocQ} = \text{some } (w, \rho')$ . The goal is simplified using the definition of the qubit allocation, standard identities for options, standard identities for products and the definition of the allocated quantum.

**Lean 4 source** `QLambda/Linear/RegFile.lean`

```

theorem allocQ_fresh {q c : Nat} {? ?' : RegFile q c} {w : Fin q}
  (h : ?.allocQ = some (w, ?')) : not ?.AllocatedQ w := by
  simp only [allocQ] at h
  split at h
  * simp only [Option.some.injEq, Prod.mk.injEq] at h
    rcases h with <rfl, rfl>
    simp [AllocatedQ]
  * contradiction

```

### 3.2.103 Classical-bit allocation of the fresh for register files

**Statement.** For natural numbers  $q, c$ , an index  $b$ : if  $\rho.\text{allocC} = \text{some } (b, \rho')$ , then it is not the case that  $\rho.\text{AllocatedC } b$ .

**Proof.** By case analysis on the derivation that  $\rho.\text{allocC} = \text{some } (b, \rho')$ . The goal is simplified using the definition of the classical-bit allocation, standard identities for options, standard identities for products and the definition of the allocated classical.

#### Lean 4 source `QLambda/Linear/RegFile.lean`

```

theorem allocC_fresh {q c : Nat} {? ?' : RegFile q c} {b : Fin c}
  (h : ?.allocC = some (b, ?')) : not ?.AllocatedC b := by
  simp only [allocC] at h
  split at h
  * simp only [Option.some.injEq, Prod.mk.injEq] at h
    rcases h with <rfl, rfl>
    simp [AllocatedC]
  * contradiction

```

### 3.2.104 Qubit allocation of the new of the allocated for register files

**Statement.** For natural numbers  $q, c$ , an index  $w$ : if  $\rho.\text{allocQ} = \text{some } (w, \rho')$ , then  $\rho'.\text{AllocatedQ } w$ .

**Proof.** By case analysis on the derivation that  $\rho.\text{allocQ} = \text{some } (w, \rho')$ . The goal is simplified using the definition of the qubit allocation, standard identities for options, standard identities for products and the definition of the allocated quantum.

#### Lean 4 source `QLambda/Linear/RegFile.lean`

```

theorem allocQ_new_allocated {q c : Nat} {? ?' : RegFile q c} {w : Fin q}
  (h : ?.allocQ = some (w, ?')) : ?'.AllocatedQ w := by
  simp only [allocQ] at h
  split at h
  * simp only [Option.some.injEq, Prod.mk.injEq] at h
    rcases h with <rfl, rfl>
    simp [AllocatedQ]
  * contradiction

```

### 3.2.105 Classical-bit allocation of the new of the allocated for register files

**Statement.** For natural numbers  $q, c$ , an index  $b$ : if  $\rho.\text{allocC} = \text{some } (b, \rho')$ , then  $\rho'.\text{AllocatedC } b$ .

**Proof.** By case analysis on the derivation that  $\rho.\text{allocC} = \text{some } (b, \rho')$ . The goal is simplified using the definition of the classical-bit allocation, standard identities for options, standard identities for products and the definition of the allocated classical.

**Lean 4 source** `QLambda/Linear/RegFile.lean`

```
theorem allocC_new_allocated {q c : Nat} {ρ ρ' : RegFile q c} {b : Fin c}
  (h : ρ.allocC = some (b, ρ')) : ρ'.AllocatedC b := by
  simp only [allocC] at h
  split at h
  * simp only [Option.some.injEq, Prod.mk.injEq] at h
    rcases h with <rfl, rfl>
    simp [AllocatedC]
  * contradiction
```

### 3.2.106 The qubit allocation preserves the structure

**Statement.** For natural numbers  $q, c$ , indexes  $\text{new}, \text{old}$ : if  $\rho.\text{allocQ} = \text{some } (\text{new}, \rho')$  and  $\rho.\text{AllocatedQ } \text{old}$ , then  $\rho'.\text{AllocatedQ } \text{old}$ .

**Proof.** By case analysis on the derivation that  $\rho.\text{allocQ} = \text{some } (\text{new}, \rho')$ . The goal is simplified using the definition of the qubit allocation, standard identities for options, standard identities for products and standard identities for natural numbers.

**Lean 4 source** `QLambda/Linear/RegFile.lean`

```
theorem allocQ_preserves {q c : Nat} {ρ ρ' : RegFile q c} {new old : Fin q}
  (h : ρ.allocQ = some (new, ρ')) (hold : ρ.AllocatedQ old) :
  ρ'.AllocatedQ old := by
  simp only [allocQ] at h
  split at h
  * simp only [Option.some.injEq, Prod.mk.injEq] at h
    rcases h with <rfl, rfl>
    exact Nat.lt_succ_of_lt hold
  * contradiction
```

### 3.2.107 The classical-bit allocation preserves the structure

**Statement.** For natural numbers  $q, c$ , indexes  $\text{new}, \text{old}$ : if  $\rho.\text{allocC} = \text{some } (\text{new}, \rho')$  and  $\rho.\text{AllocatedC } \text{old}$ , then  $\rho'.\text{AllocatedC } \text{old}$ .

**Proof.** By case analysis on the derivation that  $\rho.\text{allocC} = \text{some } (\text{new}, \rho')$ . The goal is simplified using the definition of the classical-bit allocation, standard identities for options, standard identities for products and standard identities for natural numbers.

**Lean 4 source** `QLambda/Linear/RegFile.lean`

```
theorem allocC_preserves {q c : Nat} {ρ ρ' : RegFile q c} {new old : Fin c}
  (h : ρ.allocC = some (new, ρ')) (hold : ρ.AllocatedC old) :
```

```

    ?'.AllocatedC old := by
simp only [allocC] at h
split at h
* simp only [Option.some.injEq, Prod.mk.injEq] at h
  rcases h with <rfl, rfl>
  exact Nat.lt_succ_of_lt hold
* contradiction

```

### 3.2.108 Consecutive successful quantum allocations cannot alias

**Statement.** Consecutive successful quantum allocations cannot alias. Formally:  $w_1 \neq w_2$ .

**Proof.** The key step rewrites with the qubit allocation of the new of the allocated for register files.

#### Lean 4 source `QLambda/Linear/RegFile.lean`

```

theorem allocQ_distinct {q c : Nat}
  {? ?_1 ?_2 : RegFile q c} {w_1 w_2 : Fin q}
  (h_1 : ?.allocQ = some (w_1, ?_1))
  (h_2 : ?_1.allocQ = some (w_2, ?_2)) : w_1 != w_2 := by
intro heq
have hfresh := allocQ_fresh h_2
apply hfresh
rw [ <- heq]
exact allocQ_new_allocated h_1

```

### 3.2.109 Consecutive successful classical allocations cannot alias

**Statement.** Consecutive successful classical allocations cannot alias. Formally:  $b_1 \neq b_2$ .

**Proof.** The key step rewrites with the classical-bit allocation of the new of the allocated for register files.

#### Lean 4 source `QLambda/Linear/RegFile.lean`

```

theorem allocC_distinct {q c : Nat}
  {? ?_1 ?_2 : RegFile q c} {b_1 b_2 : Fin c}
  (h_1 : ?.allocC = some (b_1, ?_1))
  (h_2 : ?_1.allocC = some (b_2, ?_2)) : b_1 != b_2 := by
intro heq
have hfresh := allocC_fresh h_2
apply hfresh
rw [ <- heq]
exact allocC_new_allocated h_1

```

### 3.2.110 Bounds for the qubit allocation

**Statement.** For natural numbers  $q, c$ , an index  $w$ : if  $\rho.\text{allocQ} = \text{some } (w, \rho')$ , then  $w.1 < q$ ,  $\rho'.\text{nextQ} \leq q$  and  $\rho'.\text{nextC} \leq c$ .

**Proof.** The witness is assembled directly from its components.

#### Lean 4 source `QLambda/Linear/RegFile.lean`



```

theorem allocQ_bounds {q c : Nat} {? ?' : RegFile q c} {w : Fin q}
  (_h : ?.allocQ = some (w, ?')) :
  w.1 < q /\ ?'.nextQ <= q /\ ?'.nextC <= c :=
  <w.2, ?'.nextQ_le, ?'.nextC_le>

```

### 3.2.111 Bounds for the classical-bit allocation

**Statement.** For natural numbers  $q, c$ , an index  $b$ : if  $\rho.\text{allocC} = \text{some } (b, \rho')$ , then  $b.1 < c$ ,  $\rho'.\text{nextQ} \leq q$  and  $\rho'.\text{nextC} \leq c$ .

**Proof.** The witness is assembled directly from its components.

#### Lean 4 source `QLambda/Linear/RegFile.lean`

```

theorem allocC_bounds {q c : Nat} {? ?' : RegFile q c} {b : Fin c}
  (_h : ?.allocC = some (b, ?')) :
  b.1 < c /\ ?'.nextQ <= q /\ ?'.nextC <= c :=
  <b.2, ?'.nextQ_le, ?'.nextC_le>

```

### 3.2.112 Executable allocated-wire check used by the compiler certificate

**Definition.** Executable allocated-wire check used by the compiler certificate.

**Construction.** Defined to be the decide of the 1 of  $<$  and  $\rho.\text{nextQ}$ .

#### Lean 4 source `QLambda/Linear/RegFile.lean`

```

def allocatedQB {q c : Nat} (? : RegFile q c) (w : Fin q) : Bool :=
  decide (w.1 < ?.nextQ)

```

### 3.2.113 Executable allocated-slot check used by the compiler certificate

**Definition.** Executable allocated-slot check used by the compiler certificate.

**Construction.** Defined to be the decide of the 1 of  $<$  and  $\rho.\text{nextC}$ .

#### Lean 4 source `QLambda/Linear/RegFile.lean`

```

def allocatedCB {q c : Nat} (? : RegFile q c) (b : Fin c) : Bool :=
  decide (b.1 < ?.nextC)

```

### 3.2.114 Soundness of the allocated QB

**Statement.** For natural numbers  $q, c$ , an index  $w$ : if  $\rho.\text{allocatedQB } w$  evaluates to true, then  $\rho.\text{AllocatedQ } w$ .

**Proof.** The goal is simplified using the definition of the allocated QB.

#### Lean 4 source `QLambda/Linear/RegFile.lean`

```

theorem allocatedQB_sound {q c : Nat} {? : RegFile q c} {w : Fin q}
  (h : ?.allocatedQB w = true) : ?.AllocatedQ w := by
  change w.1 < ?.nextQ
  simpa [allocatedQB] using h

```

### 3.2.115 Soundness of the allocated CB

**Statement.** For natural numbers  $q, c$ , an index  $b$ : if  $\rho.\text{allocatedCB } b$  evaluates to true, then  $\rho.\text{AllocatedC } b$ .

**Proof.** The goal is simplified using the definition of the allocated CB.

#### Lean 4 source `QLambda/Linear/RegFile.lean`

```
theorem allocatedCB_sound {q c : Nat} {? : RegFile q c} {b : Fin c}
  (h : ?.allocatedCB b = true) : ?.AllocatedC b := by
  change b.1 < ?.nextC
  simpa [allocatedCB] using h
```

### 3.2.116 Deterministic quantum transitions

**Definition.** Deterministic quantum transitions. Allocation resets an unused physical slot. Applying CX to its control is administrative; only saturation with a distinct target changes the register.

**Construction.** Generated by the rules `allocate`, `x`, `h`, `t`, `ry`, `cxControl`, `cx` and `reset`. Every element arises from finitely many applications of these rules, so properties are proved by induction over them.

#### Lean 4 source `QLambda/Linear/Runtime.lean`

```
inductive InternalStep {q : Nat} : Config q -> Config q -> Prop where
| allocate {s : Config q} {w : Fin q} (hfree : w notin s.frame) :
  InternalStep
  {s with control := .app (.prim .new0) .unit}
  {s with
   state := RegisterState.reset w s.state
   control := .ret (.wire w)}
| x {s : Config q} {w : Fin q} :
  InternalStep
  {s with control := .app (.prim .x) (.wire w)}
  {s with
   state := RegisterState.applyGate (.x w) s.state
   control := .ret (.wire w)}
| h {s : Config q} {w : Fin q} :
  InternalStep
  {s with control := .app (.prim .h) (.wire w)}
  {s with
   state := RegisterState.applyGate (.h w) s.state
   control := .ret (.wire w)}
| t {s : Config q} {w : Fin q} :
  InternalStep
  {s with control := .app (.prim .t) (.wire w)}
  {s with
   state := RegisterState.applyGate (.t w) s.state
   control := .ret (.wire w)}
| ry {s : Config q} {angle : Rat} {w : Fin q} :
  InternalStep
  {s with control := .app (.prim (.ry angle)) (.wire w)}
  {s with
   state :=
     RegisterState.applyGate (.ry (.rational angle) w) s.state
```

```

        control := .ret (.wire w)}
| cxControl {s : Config q} {control : Fin q} :
  InternalStep
  {s with control := .app (.prim .cx) (.wire control)}
  {s with control := .ret (.cxControl control)}
| cx {s : Config q} {control target : Fin q}
  (hne : control != target) :
  InternalStep
  {s with control := .app (.cxControl control) (.wire target)}
  {s with
    state := RegisterState.applyGate (.cx control target) s.state
    control := .ret (.pair (.wire control) (.wire target))}
| reset {s : Config q} {w : Fin q} :
  InternalStep
  {s with control := .app (.prim .reset) (.wire w)}
  {s with
    state := RegisterState.reset w s.state
    control := .ret (.wire w)}

```

### 3.2.117 Born-weighted instrument transition

**Definition.** Born-weighted instrument transition. The target is normalized and exists only for a positive-probability outcome.

**Construction.** Generated by the rules `branch`. Every element arises from finitely many applications of these rules, so properties are proved by induction over them.

#### Lean 4 source `QLambda/Linear/Runtime.lean`

```

inductive MeasurementStep {q : Nat} : Config q -> Real -> Bool -> Config q ->
  Prop where
| branch {s : Config q} {w : Fin q} {b : Bool}
  (hpositive : 0 < RegisterState.measureProbability s.state w b) :
  MeasurementStep
  {s with control := .measure (.wire w)}
  (RegisterState.measureProbability s.state w b) b
  {s with
    state := RegisterState.measured s.state w b hpositive
    control := .ret (.pair (.bit b) (.wire w))}

```

### 3.2.118 Preservation of typing under the internal

**Statement.** For a natural number  $q$ , a type  $A$ : if  $s.\text{WellTyped } A$  and  $\text{InternalStep } s \ s'$ , then  $s'.\text{WellTyped } A$ .

**Proof.** By case analysis on the derivation that  $s.\text{WellTyped } A$ . For an `allocate`, the Pauli-X gate, the Hadamard gate, the T gate, a Y-rotation, a controlled-NOT control, the controlled-NOT gate and `reset`, the claim is checked directly. The goal is simplified using the definition of the type, the definition of the primitive type, the definition of the wires and standard identities for finite sums.

#### Lean 4 source `QLambda/Linear/Runtime.lean`

```

theorem internal_preservation {q : Nat} {s s' : Config q} {A : Ty}

```

```

(ht : s.WellTyped A) (hs : InternalStep s s') :
s'.WellTyped A := by
rcases ht with <htype, hvalid, hframe>
cases hs with
| allocate hfree =>
  have hA : A = .qubit := by
    simp [Control.typeOf, Value.typeOf, primTy] using htype.symm
  subst A
  exact <rfl, .ret .wire, by
    simp [Control.wires, Value.wires, Finset.disjoint_left] using hfree>
| x | h | t | ry =>
  have hA : A = .qubit := by
    simp [Control.typeOf, Value.typeOf, primTy] using htype.symm
  subst A
  exact <rfl, .ret .wire, by
    simp [Control.wires, Value.wires] using hframe>
| cxControl =>
  have hA :
    A = .arrow .lin .qubit (.tensor .qubit .qubit) := by
    simp [Control.typeOf, Value.typeOf, primTy] using htype.symm
  subst A
  exact <rfl, .ret .cxControl, by
    simp [Control.wires, Value.wires] using hframe>
| cx hne =>
  have hA : A = .tensor .qubit .qubit := by
    simp [Control.typeOf, Value.typeOf] using htype.symm
  subst A
  cases hvalid with
  | app _ _ hdisjoint =>
    exact <rfl,
      .ret (.pair .wire .wire hdisjoint),
      by simp [Control.wires, Value.wires] using hframe>
| reset =>
  have hA : A = .qubit := by
    simp [Control.typeOf, Value.typeOf, primTy] using htype.symm
  subst A
  exact <rfl, .ret .wire, by
    simp [Control.wires, Value.wires] using hframe>

```

### 3.2.119 Preservation of typing under the measurement

**Statement.** For a natural number  $q$ , a real number  $\text{weight}$ , a bit outcome, a type  $A$ : if  $s.\text{WellTyped } A$  and  $\text{MeasurementStep } s \text{ weight outcome } s'$ , then  $s'.\text{WellTyped } A$ .

**Proof.** By case analysis on the derivation that  $s.\text{WellTyped } A$ . The goal is simplified using the definition of the type and the definition of the wires.

#### Lean 4 source `QLambda/Linear/Runtime.lean`

```

theorem measurement_preservation {q : Nat} {s s' : Config q}
  {weight : Real} {outcome : Bool} {A : Ty}
  (ht : s.WellTyped A) (hs : MeasurementStep s weight outcome s') :
  s'.WellTyped A := by
rcases ht with <htype, hvalid, hframe>
cases hs

```

```

have hA : A = .tensor .bit .qubit := by
  simp [Control.typeOf, Value.typeOf] using htype.symm
subst A
exact <rfl,
  .ret (.pair .bit .wire (by simp [Value.wires])),
  by simp [Control.wires, Value.wires] using hframe>

```

### 3.2.120 Nonnegativity of the measurement of the weight

**Statement.** For a natural number  $q$ , a real number  $\text{weight}$ , a bit  $\text{outcome}$ : if  $\text{MeasurementStep } s \text{ weight outcome } s'$ , then  $0 \leq \text{weight}$ .

**Proof.** By case analysis on the derivation that  $\text{MeasurementStep } s \text{ weight outcome } s'$ . For a branch, the claim is checked directly.

**Lean 4 source** [QLambda/Linear/Runtime.lean](#)

```

theorem measurement_weight_nonneg {q : Nat} {s s' : Config q}
  {weight : Real} {outcome : Bool}
  (hs : MeasurementStep s weight outcome s') :
  0 <= weight := by
cases hs with
| branch hpositive => exact hpositive.le

```

### 3.2.121 The measurement of the weight is at most one

**Statement.** For a natural number  $q$ , a real number  $\text{weight}$ , a bit  $\text{outcome}$ : if  $\text{MeasurementStep } s \text{ weight outcome } s'$ , then  $\text{weight} \leq 1$ .

**Proof.** By case analysis on the derivation that  $\text{MeasurementStep } s \text{ weight outcome } s'$ . It follows from the fact that the measurement probability is at most one.

**Lean 4 source** [QLambda/Linear/Runtime.lean](#)

```

theorem measurement_weight_le_one {q : Nat} {s s' : Config q}
  {weight : Real} {outcome : Bool}
  (hs : MeasurementStep s weight outcome s') :
  weight <= 1 := by
cases hs
exact RegisterState.measureProbability_le_one _ _ _

```

### 3.2.122 Every well-typed kernel request returns

**Statement.** Every well-typed kernel request returns, takes a deterministic step, takes a positive Born branch, or reports finite-register exhaustion.

**Proof.** By case analysis on the derivation that  $s.\text{WellTyped } A$ . For a `ret`, a measurement and an application, the claim is checked directly. The key step rewrites with the definition of the type and the definition of the primitive type.

**Lean 4 source** [QLambda/Linear/Runtime.lean](#)

```

theorem progress {q : Nat} {s : Config q} {A : Ty}
  (ht : s.WellTyped A) :
  s.Normal \/\ s.OutOfWires \/\
    (exists s', InternalStep s s') \/\
    (exists weight outcome s', MeasurementStep s weight outcome s') := by
  rcases ht with <htype, hvalid, hframe>
  cases hcontrol : s.control with
  | ret value =>
    exact Or.inl <value, hcontrol>
  | measure qubit =>
    have hs : s = {s with control := .measure qubit} := by
      cases s
      simp_all
    rw [hs] at htype hvalid hframe |-
    cases qubit with
    | unit => simp [Control.typeOf, Value.typeOf] at htype
    | bit b => simp [Control.typeOf, Value.typeOf] at htype
    | pair left right => simp [Control.typeOf, Value.typeOf] at htype
    | prim p => cases p <|> simp [Control.typeOf, Value.typeOf, primTy] at htype
    | cxControl control => simp [Control.typeOf, Value.typeOf] at htype
    | wire w =>
      have hsum :=
        RegisterState.measureProbability_false_add_true s.state w
      by_cases hzero :
        0 < RegisterState.measureProbability s.state w false
      * exact Or.inr (Or.inr (Or.inr
        <_, false, _, MeasurementStep.branch hzero>))
      * have hone :
        0 < RegisterState.measureProbability s.state w true := by
          have hnonneg :=
            RegisterState.measureProbability_nonneg s.state w false
          nlinarith
          exact Or.inr (Or.inr (Or.inr
            <_, true, _, MeasurementStep.branch hone>))
    | app fn arg =>
      have hs : s = {s with control := .app fn arg} := by
        cases s
        simp_all
      rw [hs] at htype hvalid hframe |-
      cases fn with
      | unit => simp [Control.typeOf, Value.typeOf] at htype
      | bit b => simp [Control.typeOf, Value.typeOf] at htype
      | pair left right => simp [Control.typeOf, Value.typeOf] at htype
      | wire w => simp [Control.typeOf, Value.typeOf] at htype
      | cxControl control =>
        cases arg with
        | unit => simp [Control.typeOf, Value.typeOf] at htype
        | bit b => simp [Control.typeOf, Value.typeOf] at htype
        | pair left right => simp [Control.typeOf, Value.typeOf] at htype
        | prim p =>
          cases p <|> simp [Control.typeOf, Value.typeOf, primTy] at htype
        | cxControl w => simp [Control.typeOf, Value.typeOf] at htype
        | wire target =>
          cases hvalid with
          | app _ _ hdisjoint =>
            have hne : control != target := by

```

```

      simp [Value.wires, Finset.disjoint_singleton_left] using
hdisjoint
      exact Or.inr (Or.inr (Or.inl <_, InternalStep.cx hne>))
| prim p =>
  cases p with
| new0 =>
  cases arg with
| unit =>
    by_cases hfull : forall w : Fin q, w in s.frame
    * exact Or.inr (Or.inl <rfl, by
      intro w
      simp [Config.live, Control.wires, Value.wires, hfull w]>)
    * push Not at hfull
      obtain <w, hw> := hfull
      exact Or.inr (Or.inr (Or.inl
        <_, InternalStep.allocate hw>))
| bit b => simp [Control.typeOf, Value.typeOf, primTy] at htype
| pair left right => simp [Control.typeOf, Value.typeOf, primTy] at
htype

| prim p =>
  cases p <;> simp [Control.typeOf, Value.typeOf, primTy] at htype
| wire w => simp [Control.typeOf, Value.typeOf, primTy] at htype
| cxControl w => simp [Control.typeOf, Value.typeOf, primTy] at htype
| x =>
  cases arg with
| unit => simp [Control.typeOf, Value.typeOf, primTy] at htype
| bit b => simp [Control.typeOf, Value.typeOf, primTy] at htype
| pair l r => simp [Control.typeOf, Value.typeOf, primTy] at htype
| prim p =>
  cases p <;> simp [Control.typeOf, Value.typeOf, primTy] at htype
| cxControl w => simp [Control.typeOf, Value.typeOf, primTy] at htype
| wire w =>
  exact Or.inr (Or.inr (Or.inl <_, InternalStep.x>))
| h =>
  cases arg with
| unit => simp [Control.typeOf, Value.typeOf, primTy] at htype
| bit b => simp [Control.typeOf, Value.typeOf, primTy] at htype
| pair l r => simp [Control.typeOf, Value.typeOf, primTy] at htype
| prim p =>
  cases p <;> simp [Control.typeOf, Value.typeOf, primTy] at htype
| cxControl w => simp [Control.typeOf, Value.typeOf, primTy] at htype
| wire w =>
  exact Or.inr (Or.inr (Or.inl <_, InternalStep.h>))
| t =>
  cases arg with
| unit => simp [Control.typeOf, Value.typeOf, primTy] at htype
| bit b => simp [Control.typeOf, Value.typeOf, primTy] at htype
| pair l r => simp [Control.typeOf, Value.typeOf, primTy] at htype
| prim p =>
  cases p <;> simp [Control.typeOf, Value.typeOf, primTy] at htype
| cxControl w => simp [Control.typeOf, Value.typeOf, primTy] at htype
| wire w =>
  exact Or.inr (Or.inr (Or.inl <_, InternalStep.t>))
| ry angle =>
  cases arg with
| unit => simp [Control.typeOf, Value.typeOf, primTy] at htype

```

```

| bit b => simp [Control.typeOf, Value.typeOf, primTy] at htype
| pair l r => simp [Control.typeOf, Value.typeOf, primTy] at htype
| prim p =>
  cases p <;> simp [Control.typeOf, Value.typeOf, primTy] at htype
| cxControl w => simp [Control.typeOf, Value.typeOf, primTy] at htype
| wire w =>
  exact Or.inr (Or.inr (Or.inl <_, InternalStep.ry>))
| cx =>
  cases arg with
  | unit => simp [Control.typeOf, Value.typeOf, primTy] at htype
  | bit b => simp [Control.typeOf, Value.typeOf, primTy] at htype
  | pair l r => simp [Control.typeOf, Value.typeOf, primTy] at htype
  | prim p =>
    cases p <;> simp [Control.typeOf, Value.typeOf, primTy] at htype
  | cxControl w => simp [Control.typeOf, Value.typeOf, primTy] at htype
  | wire w =>
    exact Or.inr (Or.inr (Or.inl <_, InternalStep.cxControl>))
| reset =>
  cases arg with
  | unit => simp [Control.typeOf, Value.typeOf, primTy] at htype
  | bit b => simp [Control.typeOf, Value.typeOf, primTy] at htype
  | pair l r => simp [Control.typeOf, Value.typeOf, primTy] at htype
  | prim p =>
    cases p <;> simp [Control.typeOf, Value.typeOf, primTy] at htype
  | cxControl w => simp [Control.typeOf, Value.typeOf, primTy] at htype
  | wire w =>
    exact Or.inr (Or.inr (Or.inl <_, InternalStep.reset>))

```

### 3.2.123 The normal or is exhausted, assuming no of the one-step reduction

**Statement.** For well-typed configurations, being stuck with no transition means exactly either returning a value or exhausting the finite allocation pool. Formally:  $s.\text{Normal} \vee s.\text{OutOfWires}$ .

**Proof.** The hypotheses are unpacked into their constituent data. It follows from the hypothesis that it is not the case that there is  $s'$  such that  $\text{InternalStep } s \ s'$  and the hypothesis that it is not the case that there is  $\text{weight, outcome, } s'$  such that  $\text{MeasurementStep } s \ \text{weight outcome } s'$ .

#### Lean 4 source `QLambda/Linear/Runtime.lean`

```

theorem normal_or_exhausted_of_no_step {q : Nat} {s : Config q} {A : Ty}
  (ht : s.WellTyped A)
  (hi : not exists s', InternalStep s s')
  (hm : not exists weight outcome s', MeasurementStep s weight outcome s') :
  s.Normal \/\ s.OutOfWires := by
  rcases progress ht with hn | ho | hi' | hm'
  * exact Or.inl hn
  * exact Or.inr ho
  * exact (hi hi').elim
  * exact (hm hm').elim

```



### 3.2.124 All deterministic targets remain normalized by construction

**Statement.** All deterministic targets remain normalized by construction. Formally:  $\text{tr } s'.\text{state.mat} = 1$ .

**Proof.** The proof term combines the facts named in it directly.

#### Lean 4 source `QLambda/Linear/Runtime.lean`

```
theorem internal_normalization {q : Nat} {s s' : Config q}
  (_hs : InternalStep s s') :
  Matrix.trace s'.state.mat = 1 :=
  s'.state.trace_eq_one
```

### 3.2.125 All positive measurement targets are normalized by construction

**Statement.** All positive measurement targets are normalized by construction. Formally:  $\text{tr } s'.\text{state.mat} = 1$ .

**Proof.** The proof term combines the facts named in it directly.

#### Lean 4 source `QLambda/Linear/Runtime.lean`

```
theorem measurement_normalization {q : Nat} {s s' : Config q}
  {weight : Real} {outcome : Bool}
  (_hs : MeasurementStep s weight outcome s') :
  Matrix.trace s'.state.mat = 1 :=
  s'.state.trace_eq_one
```

### 3.2.126 Definition of the register state

**Definition.** The register state of  $q$  is introduced by the definition below.

**Construction.** Defined to be the normalized density matrix of the Hilbert-space dimension of  $q$ .

#### Lean 4 source `QLambda/Linear/RuntimeCore.lean`

```
abbrev RegisterState (q : Nat) :=
  NormalizedDensity (CQ.QDim q)
```

### 3.2.127 Apply an isometry to a normalized register

**Definition.** Apply an isometry to a normalized register.

**Construction.** Constructed by supplying each component: underlying matrix, positive semidefiniteness and trace equality one. The accompanying laws are verified from the definitions.

#### Lean 4 source `QLambda/Linear/RuntimeCore.lean`

```
noncomputable def applyIsometry
  (U : KrausOperator (CQ.QDim q) (CQ.QDim q))
  (hU : U * U = 1) (? : RegisterState q) : RegisterState q where
  mat := KrausFamily.applyMat [U] ?.mat
  posSemidef := KrausFamily.applyMat_posSemidef [U] ?.posSemidef
```

```

trace_eq_one :=
  (KrausFamily.trace_applyMat_isometry U hU ?.mat).trans ?.trace_eq_one

```

### 3.2.128 Apply one gate from the canonical Composer matrix model

**Definition.** Apply one gate from the canonical Composer matrix model.

**Construction.** Defined by cases on the input:  $.x\ w, \rho \mapsto$  the application isometry property of the Pauli-X matrix of  $w$ , the  $x$  matrix isometry property of  $w, \rho$ ;  $.h\ w, \rho \mapsto$  the application isometry property of the Hadamard matrix of  $w$ , the  $h$  matrix isometry property of  $w, \rho$ ;  $.t\ w, \rho \mapsto$  the application isometry property of the T-gate matrix of  $w$ , the  $t$  matrix isometry property of  $w, \rho$ ;  $.ry\ \theta\ w, \rho \mapsto$  the application isometry property of the Y-rotation matrix of  $\theta$ .eval and  $w$ ;  $.cx\ control\ target, \rho \mapsto$  the application isometry property of the controlled-NOT matrix of  $control$  and  $target$ .

#### Lean 4 source `QLambda/Linear/RuntimeCore.lean`

```

noncomputable def applyGate : Composer.Gate q -> RegisterState q -> RegisterState
  q
| .x w, ? =>
  applyIsometry (Composer.xMatrix w) (Composer.xMatrix_isometry w) ?
| .h w, ? =>
  applyIsometry (Composer.hMatrix w) (Composer.hMatrix_isometry w) ?
| .t w, ? =>
  applyIsometry (Composer.tMatrix w) (Composer.tMatrix_isometry w) ?
| .ry ? w, ? =>
  applyIsometry (Composer.ryMatrix ?.eval w)
    (Composer.ryMatrix_isometry ?.eval w) ?
| .cx control target, ? =>
  applyIsometry (Composer.cxMatrix control target)
    (Composer.cxMatrix_isometry control target) ?

```

### 3.2.129 Reset one fixed-register position to $|0\rangle$

**Definition.** Reset one fixed-register position to  $|0\rangle$ .

**Construction.** Constructed by supplying each component: underlying matrix, positive semidefiniteness and trace equality one. The accompanying laws are verified from the definitions.

#### Lean 4 source `QLambda/Linear/RuntimeCore.lean`

```

noncomputable def reset (w : Fin q) (? : RegisterState q) : RegisterState q where
  mat :=
    KrausFamily.applyMat
      [Composer.resetKraus w false, Composer.resetKraus w true] ?.mat
  posSemidef :=
    KrausFamily.applyMat_posSemidef
      [Composer.resetKraus w false, Composer.resetKraus w true] ?.posSemidef
  trace_eq_one :=
    (Composer.trace_applyMat_pair_of_completeness _ _
      (Composer.resetKraus_completeness w) ?.mat).trans ?.trace_eq_one

```

### 3.2.130 The actual Kraus branch used for runtime measurement

**Definition.** The actual Kraus branch used for runtime measurement.

**Construction.** Defined to be `[projector w b]`.

**Lean 4 source** `QLambda/Linear/RuntimeCore.lean`

```
noncomputable def measureBranch (w : Fin q) (b : Bool) :  
  KrausFamily (CQ.QDim q) (CQ.QDim q) :=  
  [Composer.projector w b]
```

### 3.2.131 Born probability of one computational-basis outcome

**Definition.** Born probability of one computational-basis outcome.

**Construction.** Defined to be the Born-rule weight of the measurement branch of  $w$  and  $b$  and  $\rho$ .

**Lean 4 source** `QLambda/Linear/RuntimeCore.lean`

```
noncomputable def measureProbability (? : RegisterState q)  
  (w : Fin q) (b : Bool) : Real :=  
  NormalizedDensity.bornWeight (measureBranch w b) ?
```

### 3.2.132 Nonnegativity of the measurement probability

**Statement.** For a register state  $\rho$ , an index  $w$ , a bit  $b$ :  $0 \leq \text{measureProbability } \rho \ w \ b$ .

**Proof.** This is an instance of the nonnegativity of the Born-rule weight.

**Lean 4 source** `QLambda/Linear/RuntimeCore.lean`

```
theorem measureProbability_nonneg (? : RegisterState q)  
  (w : Fin q) (b : Bool) :  
  0 <= measureProbability ? w b :=  
  NormalizedDensity.bornWeight_nonneg _ _
```

### 3.2.133 Pointwise formula for the trace of the computational-basis projector

**Statement.** For a register state  $\rho$ , an index  $w$ , a bit  $b$ : the trace of the action of `[projector w b]` on  $\rho$ .mat equals the trace of the product of the computational-basis projector of  $w$  and  $b$  and the underlying matrix of  $\rho$ .

**Proof.** The key step rewrites with the action on a matrix of a single-entry element for Kraus families, cyclicity of the trace, the computational-basis projector of a conjugate transpose and associativity of matrix multiplication.

**Lean 4 source** `QLambda/Linear/RuntimeCore.lean`

```
private theorem trace_projector_apply (? : RegisterState q)  
  (w : Fin q) (b : Bool) :  
  Matrix.trace (KrausFamily.applyMat [Composer.projector w b] ?.mat) =  
    Matrix.trace (Composer.projector w b * ?.mat) := by  
  rw [KrausFamily.applyMat_single,
```

```

Matrix.trace_mul_comm (Composer.projector w b * ?.mat)
  (Composer.projector w b)?,
Composer.projector_conjTranspose, <- Matrix.mul_assoc,
Composer.projector_mul_self]

```

### 3.2.134 The two runtime measurement branches exhaust unit probability

**Statement.** The two runtime measurement branches exhaust unit probability. Formally:  $\text{measureProbability } \rho \ w \ \text{false} + \text{measureProbability } \rho \ w \ \text{true} = 1$ .

**Proof.** The key step rewrites with the pointwise formula for the trace of the computational-basis projector, standard identities for complex numbers, standard identities for matrices and the completeness of the computational-basis projector.

#### Lean 4 source `QLambda/Linear/RuntimeCore.lean`

```

theorem measureProbability_false_add_true (? : RegisterState q) (w : Fin q) :
  measureProbability ? w false + measureProbability ? w true = 1 := by
  change
    (Matrix.trace
      (KrausFamily.applyMat [Composer.projector w false] ?.mat)).re +
    (Matrix.trace
      (KrausFamily.applyMat [Composer.projector w true] ?.mat)).re = 1
  rw [trace_projector_apply, trace_projector_apply, <- Complex.add_re,
    <- Matrix.trace_add, <- Matrix.add_mul, Composer.projector_completeness,
    Matrix.one_mul, ?.trace_eq_one]
  rfl

```

### 3.2.135 The measurement probability is at most one

**Statement.** For a register state  $\rho$ , an index  $w$ , a bit  $b$ :  $\text{measureProbability } \rho \ w \ b \leq 1$ .

**Proof.** By case analysis on the bit  $b$ .

#### Lean 4 source `QLambda/Linear/RuntimeCore.lean`

```

theorem measureProbability_le_one (? : RegisterState q)
  (w : Fin q) (b : Bool) :
  measureProbability ? w b <= 1 := by
  cases b
  * nlinarith [measureProbability_nonneg ? w true,
    measureProbability_false_add_true ? w]
  * nlinarith [measureProbability_nonneg ? w false,
    measureProbability_false_add_true ? w]

```

### 3.2.136 Normalize a positive measurement branch

**Definition.** Normalize a positive measurement branch. Zero-probability branches do not become machine transitions.

**Construction.** Defined to be the normalize branch of the measurement branch of  $w$  and  $b$ ,  $\rho$ ,  $h$ .

#### Lean 4 source `QLambda/Linear/RuntimeCore.lean`

```

noncomputable def measured (? : RegisterState q) (w : Fin q) (b : Bool)
  (h : 0 < measureProbability ? w b) : RegisterState q :=
  NormalizedDensity.normalizeBranch (measureBranch w b) ? h

```

### 3.2.137 Gate execution is exactly application of the corresponding canonical Composer operation

**Statement.** Gate execution is exactly application of the corresponding canonical Composer operation, not an unrelated abstract unitary. Formally:  $(\text{applyGate } g \ \rho).mat = \text{KrausFamily.applyMat } ((\text{canonicalModel } q \ 0).gate \ g).kraus \ \rho.mat$ .

**Proof.** By case analysis on  $g$ .

#### Lean 4 source `QLambda/Linear/RuntimeCore.lean`

```

theorem applyGate_canonical (g : Composer.Gate q) (? : RegisterState q) :
  (applyGate g ?).mat =
    KrausFamily.applyMat ((Composer.canonicalModel q 0).gate g).kraus ?.mat := by
  cases g <;> rfl

```

### 3.2.138 The reset agrees with the canonical matrix model

**Statement.** For an index  $w$ , a register state  $\rho$ :  $(\text{reset } w \ \rho).mat$  equals the action of  $((\text{canonicalModel } q \ 0).reset \ w).kraus$  on the underlying matrix of  $\rho$ .

**Proof.** By definition: the left-hand side,  $(\text{reset } w \ \rho).mat$ , and the right-hand side, the action of  $((\text{canonicalModel } q \ 0).reset \ w).kraus$  on the underlying matrix of  $\rho$ , unfold to the same term.

#### Lean 4 source `QLambda/Linear/RuntimeCore.lean`

```

theorem reset_canonical (w : Fin q) (? : RegisterState q) :
  (reset w ?).mat =
    KrausFamily.applyMat ((Composer.canonicalModel q 0).reset w).kraus ?.mat := by
  rfl

```

### 3.2.139 The measurement branch agrees with the canonical matrix model

**Statement.** For an index  $w$ , a bit  $b$ : the measurement branch of  $w$  and  $b$  equals  $((\text{canonicalModel } q \ 0).measure \ w).branch \ (\text{if } b \text{ then } 1 \text{ else } 0)$ .

**Proof.** By case analysis on the bit  $b$ . The goal is simplified using the definition of the measurement branch, the definition of the canonical matrix model and the definition of the measurement.

#### Lean 4 source `QLambda/Linear/RuntimeCore.lean`

```

theorem measureBranch_canonical (w : Fin q) (b : Bool) :
  measureBranch w b =
    ((Composer.canonicalModel q 0).measure w).branch
      (if b then (1 : Fin 2) else (0 : Fin 2)) := by
  cases b <;> simp [measureBranch, Composer.canonicalModel, Composer.measure]

```

### 3.2.140 Runtime values

**Definition.** Runtime values. In particular, `wire` and `cxControl` are not constructors of source `Term`.

**Construction.** Generated by the rules `unit`, `bit`, `pair`, `prim`, `wire` and `cxControl`. Every element arises from finitely many applications of these rules, so properties are proved by induction over them.

**Lean 4 source** [QLambda/Linear/RuntimeCore.lean](#)

```
inductive Value (q : Nat) where
| unit
| bit (value : Bool)
| pair (left right : Value q)
| prim (p : Prim)
| wire (index : Fin q)
| cxControl (control : Fin q)
deriving Repr
```

### 3.2.141 Physical wire handles retained by a runtime value

**Definition.** Physical wire handles retained by a runtime value.

**Construction.** Defined by cases on the input: `.unit` | `.bit _` | `.prim _`  $\mapsto \emptyset$ ; `.pair left right`  $\mapsto$  wires left  $\cup$  wires right; `.wire w` | `.cxControl w`  $\mapsto \{w\}$ .

**Lean 4 source** [QLambda/Linear/RuntimeCore.lean](#)

```
def wires : Value q -> Finset (Fin q)
| .unit | .bit _ | .prim _ => {}
| .pair left right => wires left  $\cup$  wires right
| .wire w | .cxControl w => {w}
```

### 3.2.142 Runtime type, including the internal closure created by partial CX

**Definition.** Runtime type, including the internal closure created by partial CX.

**Construction.** Defined by cases on the input: `.unit`  $\mapsto$  the unit; `.bit _`  $\mapsto$  the bit; `.pair left right`  $\mapsto$  the tensor product of the type and the type; `.prim p`  $\mapsto$  the primitive type of `p`; `.wire _`  $\mapsto$  the qubit; `.cxControl _`  $\mapsto$  the function type of a linear, a qubit, the tensor product of a qubit and a qubit.

**Lean 4 source** [QLambda/Linear/RuntimeCore.lean](#)

```
def typeOf : Value q -> Ty
| .unit => .unit
| .bit _ => .bit
| .pair left right => .tensor left.typeOf right.typeOf
| .prim p => primTy p
| .wire _ => .qubit
| .cxControl _ => .arrow .lin .qubit (.tensor .qubit .qubit)
```

### 3.2.143 Runtime values own each wire at most once

**Definition.** Runtime values own each wire at most once.

**Construction.** Generated by the rules `unit`, `bit`, `prim`, `wire`, `cxControl` and `pair`. Every element arises from finitely many applications of these rules, so properties are proved by induction over them.

**Lean 4 source** `QLambda/Linear/RuntimeCore.lean`

```
inductive Valid : Value q -> Prop where
| unit : Valid .unit
| bit {b} : Valid (.bit b)
| prim {p} : Valid (.prim p)
| wire {w} : Valid (.wire w)
| cxControl {w} : Valid (.cxControl w)
| pair {left right} :
  Valid left -> Valid right -> Disjoint left.wires right.wires ->
  Valid (.pair left right)
```

### 3.2.144 Quantum-kernel control

**Definition.** Quantum-kernel control. Source evaluation supplies applications and measurement requests after evaluating their operands to runtime values.

**Construction.** Generated by the rules `ret`, `app` and `measure`. Every element arises from finitely many applications of these rules, so properties are proved by induction over them.

**Lean 4 source** `QLambda/Linear/RuntimeCore.lean`

```
inductive Control (q : Nat) where
| ret (value : Value q)
| app (fn arg : Value q)
| measure (qubit : Value q)
deriving Repr
```

### 3.2.145 Definition of the wires of control states

**Definition.** The wires is a function of type `Control q → Finset (Fin q)`.

**Construction.** Defined by cases on the input: `.ret value`  $\mapsto$  the wires; `.app fn arg`  $\mapsto$  the wires of  $\cup$  and the wires of `arg`; `.measure qubit`  $\mapsto$  the wires.

**Lean 4 source** `QLambda/Linear/RuntimeCore.lean`

```
def wires : Control q -> Finset (Fin q)
| .ret value => value.wires
| .app fn arg => fn.wires ∪ arg.wires
| .measure qubit => qubit.wires
```

### 3.2.146 Syntax-directed type of quantum-kernel control

**Definition.** Syntax-directed type of quantum-kernel control.

**Construction.** Defined by cases on the input: `.ret value`  $\mapsto$  the present value the type; `.app fn arg`  $\mapsto$  match `fn.typeOf` with; `.arrow .lin A B`  $\mapsto$  if `arg.typeOf = A` then some `B` else none; `_`  $\mapsto$  none; `.measure qubit`  $\mapsto$  if `qubit.typeOf = .qubit` then some `(.tensor .bit .qubit)` else none.

**Lean 4 source** [QLambda/Linear/RuntimeCore.lean](#)

```
def typeOf : Control q -> Option Ty
| .ret value => some value.typeOf
| .app fn arg =>
  match fn.typeOf with
  | .arrow .lin A B => if arg.typeOf = A then some B else none
  | _ => none
| .measure qubit =>
  if qubit.typeOf = .qubit then some (.tensor .bit .qubit) else none
```

### 3.2.147 Linear validity of a pending runtime request

**Definition.** Linear validity of a pending runtime request.

**Construction.** Generated by the rules `ret`, `app` and `measure`. Every element arises from finitely many applications of these rules, so properties are proved by induction over them.

**Lean 4 source** [QLambda/Linear/RuntimeCore.lean](#)

```
inductive Valid : Control q -> Prop where
| ret {value} : value.Valid -> Valid (.ret value)
| app {fn arg} :
  fn.Valid -> arg.Valid -> Disjoint fn.wires arg.wires ->
  Valid (.app fn arg)
| measure {qubit} : qubit.Valid -> Valid (.measure qubit)
```

### 3.2.148 A normalized finite-dimensional density matrix

**Definition.** A normalized finite-dimensional density matrix.

**Construction.** An element consists of `mat`, subject to the laws `posSemidef` and `trace_eq_one`.

**Lean 4 source** [QLambda/NormalizedDensity.lean](#)

```
structure NormalizedDensity (n : Nat) where
  mat : Matrix (Fin n) (Fin n) ?
  posSemidef : mat.PosSemidef
  trace_eq_one : Matrix.trace mat = 1
```

### 3.2.149 Extensionality for normalized density matrices

**Statement.** If  $\rho.\text{mat} = \sigma.\text{mat}$ , then  $\rho = \sigma$ . Formally:  $\rho = \sigma$ .

**Proof.** By case analysis on  $\rho$ .



### Lean 4 source `QLambda/NormalizedDensity.lean`

```
theorem ext {? sigma : NormalizedDensity n} (h : ?.mat = sigma.mat) : ? = sigma := by
  cases ?
  cases sigma
  congr
```

### 3.2.150 Born weight of a Kraus branch on a normalized state

**Definition.** Born weight of a Kraus branch on a normalized state.

**Construction.** Defined to be  $(\text{tr } (\text{KrausFamily.applyMat } K \ \rho.\text{mat})).\text{re}$ .

### Lean 4 source `QLambda/NormalizedDensity.lean`

```
def bornWeight (K : KrausFamily n m) (? : NormalizedDensity n) : ? :=
  (Matrix.trace (KrausFamily.applyMat K ?.mat)).re
```

### 3.2.151 Nonnegativity of the Born-rule weight

**Statement.** For the Kraus family  $K$ :  $0 \leq \text{bornWeight } K \ \rho$ . Formally:  $0 \leq \text{bornWeight } K \ \rho$ .

**Proof.** The goal is simplified using the definition of the Born-rule weight and standard identities for matrices.

### Lean 4 source `QLambda/NormalizedDensity.lean`

```
theorem bornWeight_nonneg (K : KrausFamily n m) (? : NormalizedDensity n) :
  0 <= bornWeight K ? := by
  have hpos := KrausFamily.applyMat_posSemidef K ?.posSemidef
  simp [bornWeight, Matrix.trace] using
    (Finset.sum_nonneg fun (i : Fin m) (_ : i in Finset.univ) =>
      (Complex.nonneg_iff.mp hpos.diag_nonneg).1)
```

### 3.2.152 Normalize a positive Kraus branch

**Definition.** Normalize a positive Kraus branch.

**Construction.** Constructed by supplying each component: underlying matrix, positive semidefiniteness and trace equality one. The accompanying laws are verified from the definitions.

### Lean 4 source `QLambda/NormalizedDensity.lean`

```
noncomputable def normalizeBranch (K : KrausFamily n m)
  (? : NormalizedDensity n) (h : 0 < bornWeight K ?) :
  NormalizedDensity m where
  mat := (bornWeight K ?)^-1 * KrausFamily.applyMat K ?.mat
  posSemidef :=
    (KrausFamily.applyMat_posSemidef K ?.posSemidef).smul
    (inv_nonneg.mpr (le_of_lt h))
  trace_eq_one := by
    rw [Matrix.trace_smul]
    have hpos := KrausFamily.applyMat_posSemidef K ?.posSemidef
    have him :
```

```

      (Matrix.trace (KrausFamily.applyMat K ?.mat)).im = 0 := by
    simp [Matrix.trace] using
      (Finset.sum_eq_zero fun (i : Fin m) (_ : i in Finset.univ) =>
        (Complex.nonneg_iff.mp hpos.diag_nonneg).2.symm)
  have htrace :
    Matrix.trace (KrausFamily.applyMat K ?.mat) =
      (bornWeight K ? : ?) := by
    apply Complex.ext
    * rfl
    * simp using him
  rw [htrace]
  simp [ne_of_gt h]

```

### 3.2.153 Normalize branch of the underlying matrix

**Statement.** For the Kraus family  $K$ : if  $0 < \text{bornWeight } K \ \rho$ , then  $(\text{normalizeBranch } K \ \rho \ h) . \text{mat}$  equals the action of  $K$  on  $\rho . \text{mat}$  scaled by  $(\text{bornWeight } K \ \rho)^{-1}$ .

**Proof.** By definition: the left-hand side,  $(\text{normalizeBranch } K \ \rho \ h) . \text{mat}$ , and the right-hand side, the action of  $K$  on  $\rho . \text{mat}$  scaled by  $(\text{bornWeight } K \ \rho)^{-1}$ , unfold to the same term.

#### Lean 4 source `QLambda/NormalizedDensity.lean`

```

@[simp] theorem normalizeBranch_mat (K : KrausFamily n m)
  (? : NormalizedDensity n) (h : 0 < bornWeight K ?) :
  (normalizeBranch K ? h).mat =
    (bornWeight K ?)^-1 * KrausFamily.applyMat K ?.mat :=
  rfl

```

### 3.2.154 A finite quantum instrument

**Definition.** A finite quantum instrument. Each outcome is CP, while trace non-increase is required of the sum over all outcomes.

**Construction.** An element consists of `branch` and `trace_nonincreasing`.

#### Lean 4 source `QLambda/QuantumInstrument.lean`

```

structure QuantumInstrument (n m outcomes : Nat) where
  branch : Fin outcomes -> KrausFamily n m
  trace_nonincreasing :
    forall ? : Matrix (Fin n) (Fin n) ?, ?.PosSemidef ->
      (? i, (Matrix.trace (KrausFamily.applyMat (branch i) ?)).re) <=
        (Matrix.trace ?).re

```

### 3.2.155 Regard a quantum operation as a one-outcome instrument

**Definition.** Regard a quantum operation as a one-outcome instrument.

**Construction.** Constructed by supplying each component: `branch` and `trace nonincreasing`. The accompanying laws are verified from the definitions.

#### Lean 4 source `QLambda/QuantumInstrument.lean`

```

def singleton {n m : Nat} (? : QuantumOperation n m) :
  QuantumInstrument n m 1 where
  branch := fun _ => ?.kraus
  trace_nonincreasing := by
    intro ? h?
    simp using ?.trace_nonincreasing ? h?

```

### 3.2.156 A trace-nonincreasing completely positive map, represented by finitely many Kraus operators

**Definition.** A trace-nonincreasing completely positive map, represented by finitely many Kraus operators.

**Construction.** An element consists of `kraus` and `trace_nonincreasing`.

**Lean 4 source** [QLambda/QuantumOperation.lean](#)

```

structure QuantumOperation (n m : Nat) where
  kraus : KrausFamily n m
  trace_nonincreasing :
    forall ? : Matrix (Fin n) (Fin n) ?, ?PosSemidef ->
      (Matrix.trace (KrausFamily.applyMat kraus ?)).re <=
        (Matrix.trace ?).re

```

### 3.2.157 The identity quantum operation

**Definition.** The identity quantum operation.

**Construction.** Constructed by supplying each component: Kraus operators and trace nonincreasing. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/QuantumOperation.lean](#)

```

def identity (n : Nat) : QuantumOperation n n where
  kraus := KrausFamily.identity n
  trace_nonincreasing := by
    intro ? _
    rw [KrausFamily.applyMat_identity]

```

### 3.2.158 The zero (completely forgetful) operation

**Definition.** The zero (completely forgetful) operation.

**Construction.** Constructed by supplying each component: Kraus operators and trace nonincreasing. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/QuantumOperation.lean](#)

```

def zero (n m : Nat) : QuantumOperation n m where
  kraus := KrausFamily.zero
  trace_nonincreasing := by
    intro ? h?
    have htr : 0 <= Matrix.trace ? := PosSemidef.trace_nonneg h?
    rw [KrausFamily.applyMat_zero, Matrix.trace_zero, Complex.zero_re]
    exact (RCLike.nonneg_iff (K := ?).mp htr).1

```

### 3.2.159 Sequential composition of trace-nonincreasing CP maps

**Definition.** Sequential composition of trace-nonincreasing CP maps.

**Construction.** Constructed by supplying each component: Kraus operators and trace nonincreasing. The accompanying laws are verified from the definitions.

**Lean 4 source** `QLambda/QuantumOperation.lean`

```
def comp {n m ? : Nat} (? : QuantumOperation m ?) (? : QuantumOperation n m) :
  QuantumOperation n ? where
  kraus := KrausFamily.comp ?.kraus ?.kraus
  trace_nonincreasing := by
    intro ? h?
    rw [KrausFamily.applyMat_comp]
    exact (?.trace_nonincreasing _ (KrausFamily.applyMat_posSemidef ?.kraus h?)).trans
      (?.trace_nonincreasing ? h?)
```

### 3.2.160 Action on a sub-normalized density

**Definition.** Action on a sub-normalized density.

**Construction.** Constructed by supplying each component: underlying matrix, positive semidefiniteness and trace order one. The accompanying laws are verified from the definitions.

**Lean 4 source** `QLambda/QuantumOperation.lean`

```
def apply {n m : Nat} (? : QuantumOperation n m) (? : SubNormalizedDensity n) :
  SubNormalizedDensity m where
  mat := KrausFamily.applyMat ?.kraus ?.mat
  posSemidef := KrausFamily.applyMat_posSemidef ?.kraus ?.posSemidef
  trace_le_one :=
    (?.trace_nonincreasing ?.mat ?.posSemidef).trans ?.trace_le_one
```

### 3.2.161 One-element family of an isometry is a quantum operation

**Definition.** One-element family of an isometry is a quantum operation.

**Construction.** Constructed by supplying each component: Kraus operators and trace nonincreasing. The accompanying laws are verified from the definitions.

**Lean 4 source** `QLambda/QuantumOperation.lean`

```
def ofIsometry {n m : Nat} (A : KrausOperator n m) (hA : A? * A = 1) :
  QuantumOperation n m where
  kraus := [A]
  trace_nonincreasing := by
    intro ? _
    rw [KrausFamily.trace_applyMat_isometry A hA]
```

### 3.2.162 Pauli-X on a qubit

**Definition.** Pauli-X on a qubit.

**Construction.** The map sending  $i \ j$  to  $\text{if } i = j \text{ then } 0 \text{ else } 1$ .

**Lean 4 source** `QLambda/QuantumQubit.lean`

```
def pauliX : KrausOperator 2 2 :=
  fun i j => if i = j then 0 else 1
```

### 3.2.163 Pauli-X matrix of a conjugate transpose for qubits

**Statement.** The  $\text{pauli } x^H$  equals the Pauli-X matrix. Formally:  $\text{pauliX}^\dagger = \text{pauliX}$ .

**Proof.** Both sides are compared pointwise (by extensionality). The goal is simplified using the definition of the Pauli-X matrix. Every finite index is checked separately.

**Lean 4 source** `QLambda/QuantumQubit.lean`

```
theorem pauliX_conjTranspose : pauliX? = pauliX := by
  ext i j
  simp [pauliX, conjTranspose]
  fin_cases i <|> fin_cases j <|> simp
```

### 3.2.164 The Pauli-X matrix is idempotent

**Statement.** The product of the  $\text{pauli } x^H$  and the Pauli-X matrix equals 1.

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the Pauli-X matrix of a conjugate transpose for qubits, the definition of the Pauli-X matrix and standard identities for matrices. Every finite index is checked separately.

**Lean 4 source** `QLambda/QuantumQubit.lean`

```
theorem pauliX_mul_self : pauliX? * pauliX = 1 := by
  rw [pauliX_conjTranspose]
  ext i j
  fin_cases i <|> fin_cases j <|> simp [pauliX, Matrix.mul_apply]
```

### 3.2.165 Pauli-X as a quantum operation

**Definition.** Pauli-X as a quantum operation.

**Construction.** Defined to be the map induced by the isometry the  $\text{pauli } x$  multiplication self.

**Lean 4 source** `QLambda/QuantumQubit.lean`

```
def pauliXOp : QuantumOperation 2 2 :=
  QuantumOperation.ofIsometry pauliX pauliX_mul_self
```

### 3.2.166 Computational-basis projector $|0\rangle\langle 0|$

**Definition.** Computational-basis projector  $|0\rangle\langle 0|$ .

**Construction.** The map sending  $i \ j$  to  $\text{if } i = 0 \wedge j = 0 \text{ then } 1 \text{ else } 0$ .

**Lean 4 source** `QLambda/QuantumQubit.lean`

```
def proj0 : KrausOperator 2 2 :=
  fun i j => if i = 0 /\ j = 0 then 1 else 0
```

### 3.2.167 Computational-basis projector $|1\rangle\langle 1|$

**Definition.** Computational-basis projector  $|1\rangle\langle 1|$ .

**Construction.** The map sending  $i\ j$  to  $\text{if } i = 1 \wedge j = 1 \text{ then } 1 \text{ else } 0$ .

**Lean 4 source** [QLambda/QuantumQubit.lean](#)

```
def proj1 : KrausOperator 2 2 :=
  fun i j => if i = 1 /\ j = 1 then 1 else 0
```

### 3.2.168 The projector onto zero is idempotent

**Statement.** The product of `proj0` and `proj0` equals `proj0`. Formally:  $\text{proj0} * \text{proj0} = \text{proj0}$ .

**Proof.** Both sides are compared pointwise (by extensionality). The goal is simplified using the definition of the projector onto zero and standard identities for matrices. Every finite index is checked separately.

**Lean 4 source** [QLambda/QuantumQubit.lean](#)

```
theorem proj0_mul_self : proj0 * proj0 = proj0 := by
  ext i j
  fin_cases i <|> fin_cases j <|> simp [proj0, Matrix.mul_apply]
```

### 3.2.169 The projector onto one is idempotent

**Statement.** The product of `proj1` and `proj1` equals `proj1`. Formally:  $\text{proj1} * \text{proj1} = \text{proj1}$ .

**Proof.** Both sides are compared pointwise (by extensionality). The goal is simplified using the definition of the projector onto one and standard identities for matrices. Every finite index is checked separately.

**Lean 4 source** [QLambda/QuantumQubit.lean](#)

```
theorem proj1_mul_self : proj1 * proj1 = proj1 := by
  ext i j
  fin_cases i <|> fin_cases j <|> simp [proj1, Matrix.mul_apply]
```

### 3.2.170 Projector onto zero of a conjugate transpose for qubits

**Statement.**  $\text{proj0}^\dagger = \text{proj0}$ . Formally:  $\text{proj0}^\dagger = \text{proj0}$ .

**Proof.** Both sides are compared pointwise (by extensionality). The goal is simplified using the definition of the projector onto zero. Every finite index is checked separately.

**Lean 4 source** [QLambda/QuantumQubit.lean](#)

```
theorem proj0_conjTranspose : proj0? = proj0 := by
  ext i j
  fin_cases i <|> fin_cases j <|> simp [proj0, conjTranspose]
```

### 3.2.171 Projector onto one of a conjugate transpose for qubits

**Statement.**  $\text{proj1}^\dagger = \text{proj1}$ . Formally:  $\text{proj1}^\dagger = \text{proj1}$ .

**Proof.** Both sides are compared pointwise (by extensionality). The goal is simplified using the definition of the projector onto one. Every finite index is checked separately.

**Lean 4 source** `QLambda/QuantumQubit.lean`

```
theorem proj1_conjTranspose : proj1? = proj1 := by
  ext i j
  fin_cases i <;> fin_cases j <;> simp [proj1, conjTranspose]
```

### 3.2.172 Projector onto zero of a sum of the projector onto one for qubits

**Statement.** The sum of  $\text{proj0}$  and  $\text{proj1}$  equals 1. Formally:  $\text{proj0} + \text{proj1} = 1$ .

**Proof.** Both sides are compared pointwise (by extensionality). The goal is simplified using the definition of the projector onto zero and the definition of the projector onto one. Every finite index is checked separately.

**Lean 4 source** `QLambda/QuantumQubit.lean`

```
theorem proj0_add_proj1 : proj0 + proj1 = (1 : KrausOperator 2 2) := by
  ext i j
  fin_cases i <;> fin_cases j <;> simp [proj0, proj1]
```

### 3.2.173 Pointwise formula for the trace of the projection

**Statement.** For a matrix  $\rho$ : if  $P * P = P$  and  $P^\dagger = P$ , then the trace of the action of  $[P]$  on  $\rho$  equals the trace of the product of  $P$  and  $\rho$ .

**Proof.** The key step rewrites with the action on a matrix of a single-entry element for Kraus families, cyclicity of the trace, the hypothesis that  $P^\dagger = P$  and associativity of matrix multiplication.

**Lean 4 source** `QLambda/QuantumQubit.lean`

```
theorem trace_proj_apply (P : KrausOperator 2 2)
  (hP : P * P = P) (hHerm : P? = P)
  (? : Matrix (Fin 2) (Fin 2) ?) :
  Matrix.trace (KrausFamily.applyMat [P] ?) = Matrix.trace (P * ?) := by
  rw [KrausFamily.applyMat_single, Matrix.trace_mul_comm (P * ?) P?, hHerm,
    <- Matrix.mul_assoc, hP]
```

### 3.2.174 Computational-basis measurement as a two-outcome instrument

**Definition.** Computational-basis measurement as a two-outcome instrument.

**Construction.** Constructed by supplying each component: branch and trace nonincreasing. The accompanying laws are verified from the definitions.

**Lean 4 source** `QLambda/QuantumQubit.lean`

```

def measureZ : QuantumInstrument 2 2 2 where
  branch := fun i => if i = 0 then [proj0] else [proj1]
  trace_nonincreasing := by
    intro ? _
    have h0 := trace_proj_apply proj0 proj0_mul_self proj0_conjTranspose ?
    have h1 := trace_proj_apply proj1 proj1_mul_self proj1_conjTranspose ?
    have hsum :
      Matrix.trace (proj0 * ?) + Matrix.trace (proj1 * ?) =
        Matrix.trace ? := by
      rw [ <- Matrix.trace_add, <- Matrix.add_mul, proj0_add_proj1, Matrix.one_mul ]
      rw [Fin.sum_univ_two]
    have hne : (1 : Fin 2) != 0 := by decide
    simp only [hne, reduceIte]
    rw [h0, h1, <- Complex.add_re, hsum]

```

### 3.2.175 Computational-basis measurement returning a boolean

**Definition.** Computational-basis measurement returning a boolean.

**Construction.** Constructed by supplying each component: outcome, branch, value and trace nonincreasing. The accompanying laws are verified from the definitions.

#### Lean 4 source `QLambda/QuantumQubit.lean`

```

def measureZComp : FiniteInstrumentComp 2 Bool where
  Outcome := Bool
  branch := fun b => if b then [proj1] else [proj0]
  value := id
  trace_nonincreasing := by
    intro ? _
    have h0 := trace_proj_apply proj0 proj0_mul_self proj0_conjTranspose ?
    have h1 := trace_proj_apply proj1 proj1_mul_self proj1_conjTranspose ?
    have hsum :
      Matrix.trace (proj0 * ?) + Matrix.trace (proj1 * ?) =
        Matrix.trace ? := by
      rw [ <- Matrix.trace_add, <- Matrix.add_mul, proj0_add_proj1, Matrix.one_mul ]
      rw [Fintype.sum_bool]
    change
      (KrausFamily.applyMat [proj1] ?).trace.re +
      (KrausFamily.applyMat [proj0] ?).trace.re <= _
    rw [h1, h0, <- Complex.add_re, add_comm, hsum]

```

### 3.2.176 The structure of a subnormalized density matrix

**Definition.** Sub-normalized density operator on  $M_n(\mathbb{C})$ : positive semidefinite with real trace at most one.

**Construction.** An element consists of `mat`, subject to the laws `posSemidef` and `trace_le_one`.

#### Lean 4 source `QLambda/SubNormalizedDensity.lean`

```

structure SubNormalizedDensity (n : Nat) where
  mat : Matrix (Fin n) (Fin n) ?
  posSemidef : mat.PosSemidef
  trace_le_one : (Matrix.trace mat).re <= 1

```



### 3.2.177 Extensionality for subnormalized density matrices

**Statement.** If  $\rho.\text{mat} = \sigma.\text{mat}$ , then  $\rho = \sigma$ . Formally:  $\rho = \sigma$ .

**Proof.** The hypotheses are unpacked into their constituent data.

**Lean 4 source** [QLambda/SubNormalizedDensity.lean](#)

```
theorem ext {? sigma : SubNormalizedDensity n} (h : ?.mat = sigma.mat) : ? = sigma :=
  by
  cases ?; cases sigma; congr
```

### 3.2.178 If $A$ and $-A$ are both positive semidefinite, then $A = 0$

**Statement.** If  $A$  and  $-A$  are both positive semidefinite, then  $A = 0$ . Formally:  $A = 0$ .

**Proof.** Equality is proved by showing both inequalities. The key step rewrites with the characterization of the order for subnormalized density matrices, the usual algebraic identities, the hypothesis that  $-A$  is positive semidefinite and antisymmetry of the order.

**Lean 4 source** [QLambda/SubNormalizedDensity.lean](#)

```
theorem le_antisymm_of_posSemidef_neg {A : Matrix (Fin n) (Fin n) ?}
  (hA : A.PosSemidef) (hneg : (-A).PosSemidef) : A = 0 := by
  have h_1 : (0 : Matrix (Fin n) (Fin n) ?) <= A := by
    simp [nonneg_iff_posSemidef] using hA
  have h_2 : A <= (0 : Matrix (Fin n) (Fin n) ?) := by
    rw [Matrix.le_iff, zero_sub]
    exact hneg
  exact le_antisymm h_2 h_1
```

### 3.2.179 Nonnegativity of the real part of the trace

**Statement.**  $0 \leq (\text{tr } \rho.\text{mat}).\text{re}$ . Formally:  $0 \leq (\text{tr } \rho.\text{mat}).\text{re}$ .

**Proof.** The key step rewrites with standard identities for matrices and standard identities for finite sums.

**Lean 4 source** [QLambda/SubNormalizedDensity.lean](#)

```
theorem re_trace_nonneg (? : SubNormalizedDensity n) :
  0 <= (Matrix.trace ?.mat).re := by
  have hsum : (Matrix.trace ?.mat).re = ? i : Fin n, (? .mat i i).re := by
    simp [Matrix.trace]
  rw [hsum]
  exact Finset.sum_nonneg fun i _ =>
    (RCLike.nonneg_iff (K := ?).mp (? .posSemidef.diag_nonneg (i := i))).1
```

### 3.2.180 Definition of the spectral scaling of subnormalized density matrices

**Definition.** The spectral scaling of  $t$  is a real number.

**Construction.** Defined to be the  $\exp$  of  $-\max t$ .

**Lean 4 source** [QLambda/SubNormalizedDensity.lean](#)

```
noncomputable def spectralScale (t : ?) : ? := Real.exp (-max t 0)
```

### 3.2.181 Nonnegativity of the spectral scaling

**Statement.** For a real number  $t$ :  $0 \leq \text{spectralScale } t$ . Formally:  $0 \leq \text{spectralScale } t$ .

**Proof.** This is an instance of standard identities for real numbers.

**Lean 4 source** [QLambda/SubNormalizedDensity.lean](#)

```
theorem spectralScale_nonneg (t : ?) : 0 <= spectralScale t :=
  Real.exp_nonneg _
```

### 3.2.182 The spectral scaling is at most one

**Statement.** For a real number  $t$ :  $\text{spectralScale } t \leq 1$ . Formally:  $\text{spectralScale } t \leq 1$ .

**Proof.** This is an instance of standard identities for real numbers.

**Lean 4 source** [QLambda/SubNormalizedDensity.lean](#)

```
theorem spectralScale_le_one (t : ?) : spectralScale t <= 1 :=
  Real.exp_le_one_iff.mpr (neg_nonpos.mpr (le_max_right t 0))
```

### 3.2.183 Spectral scaling for subnormalized density matrices, assuming nonnegativity

**Statement.** For a real number  $t$ : if  $0 \leq t$ , then the spectral scaling of  $t$  equals the exp of  $-t$ .

**Proof.** The goal is simplified using the definition of the spectral scaling and the hypothesis that  $0 \leq t$ .

**Lean 4 source** [QLambda/SubNormalizedDensity.lean](#)

```
theorem spectralScale_of_nonneg {t : ?} (ht : 0 <= t) :
  spectralScale t = Real.exp (-t) := by
  simp [spectralScale, ht]
```

### 3.2.184 Definition of the spectral erosion of subnormalized density matrices

**Definition.** Spectral depletion flow:  $\Phi_t(\rho) = e^{\{-\max(t, 0)\}} \rho$ .

**Construction.** Constructed by supplying each component: underlying matrix, positive semidefiniteness and trace order one. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/SubNormalizedDensity.lean](#)

```
noncomputable def spectralErode (t : ?) (? : SubNormalizedDensity n) :
  SubNormalizedDensity n where
  mat := spectralScale t * ?.mat
  posSemidef := ?.posSemidef.smul (spectralScale_nonneg t)
  trace_le_one := by
    have hre := ?.re_trace_nonneg
    calc
      (Matrix.trace (spectralScale t * ?.mat)).re
```

```

    = spectralScale t * (Matrix.trace ?.mat).re := by
      simp [Matrix.trace_smul]
  _ <= 1 * (Matrix.trace ?.mat).re :=
      mul_le_mul_of_nonneg_right (spectralScale_le_one t) hre
  _ = (Matrix.trace ?.mat).re := one_mul _
  _ <= 1 := ?.trace_le_one

```

### 3.2.185 Spectral erosion of the underlying matrix

**Statement.** For a real number  $t$ :  $(\text{spectralErode } t \ \rho) . \text{mat}$  equals the underlying matrix of  $\rho$  scaled by the spectral scaling of  $t$ .

**Proof.** By definition: the left-hand side,  $(\text{spectralErode } t \ \rho) . \text{mat}$ , and the right-hand side, the underlying matrix of  $\rho$  scaled by the spectral scaling of  $t$ , unfold to the same term.

**Lean 4 source** `QLambda/SubNormalizedDensity.lean`

```

theorem spectralErode_mat (t : ?) (? : SubNormalizedDensity n) :
  (spectralErode t ?) . mat = spectralScale t * ?.mat := rfl

```

## 4 Quantum Sets, Relations, and qCPOs

A quantum set  $X$  is a family of finite-dimensional Hilbert spaces  $(X_x)_{x \in \text{At}(X)}$ . A quantum relation  $R : X \rightarrow Y$  assigns to each pair  $(x, y)$  a complex linear subspace

$$R(x, y) \subseteq \mathcal{L}(X_x, Y_y).$$

Relations are ordered pointwise by inclusion. Composition takes the span of operator products over intermediate atoms, and dagger takes adjoints while reversing atom pairs.

### 4.1 Formalized relation algebra

`QLambda/Domain/QuantumRel.lean` proves:

$$(T \circ S) \circ R = T \circ (S \circ R), \quad R \circ 1 = R = 1 \circ R,$$

$$(S \circ R)^\dagger = R^\dagger \circ S^\dagger,$$

and

$$\left( \bigvee_n S_n \right) \circ R = \bigvee_n (S_n \circ R), \quad S \circ \left( \bigvee_n R_n \right) = \bigvee_n (S \circ R_n).$$

Each hom is a complete lattice. Consequently quantum sets and quantum relations form an  $\omega$ CPO-enriched category `qRelCategory`. The compared statements are `QLambda.Palomar.quantumRel_assoc`, `QLambda.Palomar.quantumRel_dagger_comp`, `QLambda.Palomar.quantum`

`Rel_id_comp`, `QLambda.Palomar.quantumRel_comp_id`, `QLambda.Palomar.quantumRel_comp_iSup_left`, and `QLambda.Palomar.quantumRel_comp_iSup_right`. Identity laws take a `quantumDecEq` hypothesis, which `Solution` defines as `DecidableEq` of the quantum-set atoms.

A relation is a quantum function when it satisfies the usual dagger inequalities. Comparable quantum functions are equal, and quantum functions are closed under composition. Unitary matrices yield quantum functions, and the formalized  $H$ ,  $X$ ,  $T$ ,  $RY$ , and  $CX$  matrices agree with their completed-CP presentations.

## 4.2 Quantum posets and completeness

A quantum poset is a quantum set with a reflexive, transitive, antisymmetric quantum relation. The qCPO condition is stated using increasing sequences of functions from atomic probes. Discrete quantum posets are qCPOs because comparability forces equality, so every such chain is constant. This gives the qubit, classical bit, and tensor-unit objects used by the finite fragment. `QLambda.Palomar.qubit_isQuantumCPO` is `IsQuantumCPO` of the discrete qubit.

`QuantumMonoidal.lean` supplies tensor on homs, internal hom, evaluation, currying, unitors, associator, and braiding, and proves the required  $\omega$ -supremum laws. `QuantumLNL.lean` packages the resulting concrete model. Its nonlinear category consists of sets and functions with discrete hom orders; classical inclusion is the graph functor and its right adjoint is the set of relations from the tensor unit. This deliberately avoids the non-monotone graph map from pointwise-ordered continuous-function homs.

Separately, `QuantumCPOCategory.lean` packages quantum CPOs and Scott-continuous quantum functions as an  $\omega$ CPO-enriched category. `QLambda.Palomar.set_qRel_linear_objects` is the equality `quantumLNL.linear.Obj = qRelCategory.Obj`. `QLambda.Palomar.qCPO_category_objects` is `qCPOCategory.Obj = QuantumCPO`. The formalization does not identify that category with the linear category of the concrete `Set-qRel` adjunction. The published recursive LNL route instead uses the quantum lift monad and its Kleisli category; that construction is not yet present here.

## 4.3 Theorem dependence

concrete LNL packaging and the separate Scott-function qCPO category.

## 4.4 Blueprint declarations — Quantum sets, relations, and qCPOs

*Auto-generated from the Lean sources (1861 declarations). Each card states the result in mathematical English and explains the idea of its proof or construction; the Lean source follows each card.*


### 4.4.1 Finite Kraus presentation of a CP map

**Definition.** Finite Kraus presentation of a CP map.

**Construction.** An element consists of `kraus`.

**Lean 4 source** `QLambda/Domain/CPPresentation.lean`

```
structure CPPresentation (n m : Nat) where
  kraus : KrausFamily n m
```

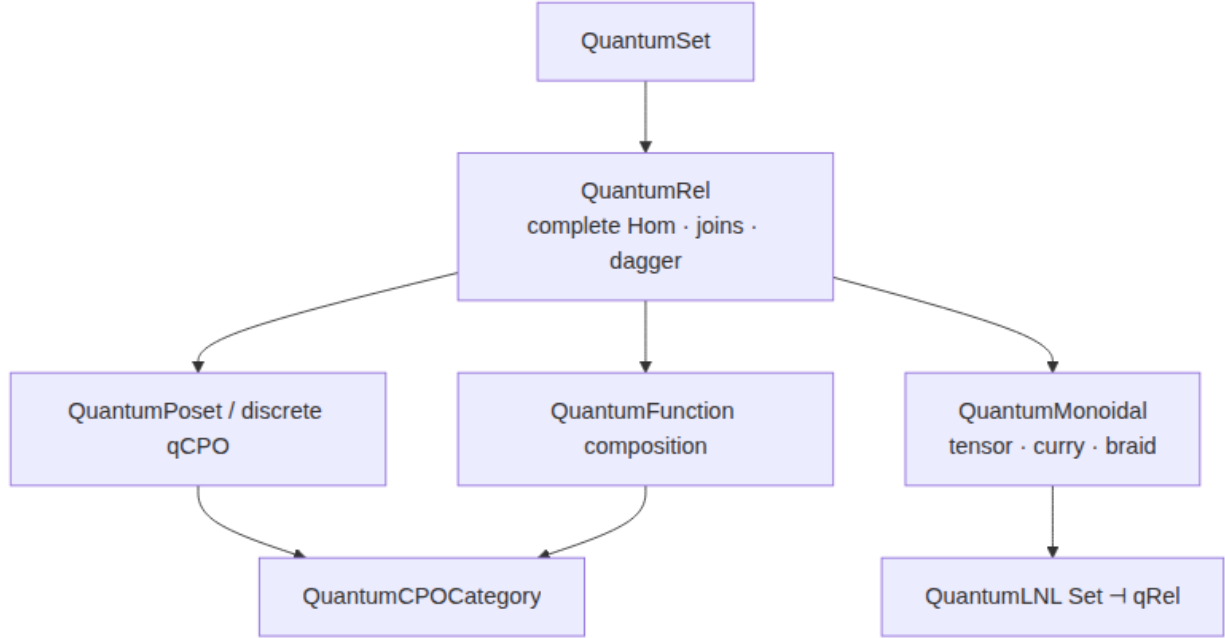

**Figure 6:** Section 4 theorem dependence: quantum-relation algebra supports the

#### 4.4.2 Definition of the semantic CP

**Definition.** The semantic CP of  $n$  and  $m$  is introduced by the definition below.

**Construction.** Defined to be the antisymmetrization of the CP presentation of  $n$  and  $m$  and  $\cdot \leq \cdot$ .

**Lean 4 source** `QLambda/Domain/CPPresentationInstances.lean`

```
abbrev SemanticCP (n m : Nat) :=
  Antisymmetrization (CPPresentation n m) (* <= *)
```

#### 4.4.3 Finite CP maps modulo semantic equality of Kraus presentations

**Definition.** Finite CP maps modulo semantic equality of Kraus presentations.

**Construction.** Defined to be the semantic CP of  $n$  and  $m$ .

**Lean 4 source** `QLambda/Domain/CPPresentationInstances.lean`


```
abbrev CompletedCP (n m : Nat) := SemanticCP n m
```

#### 4.4.4 Definition of the map determined by a Kraus family of completed CP classes

**Definition.** The map determined by a Kraus family of  $\mathbb{K}$  is a completed CP class.

**Construction.** Defined to be the passage to antisymmetrization of  $\cdot \leq \cdot$  and  $\langle \mathbb{K} \rangle$ .

**Lean 4 source** `QLambda/Domain/CPPresentationInstances.lean`

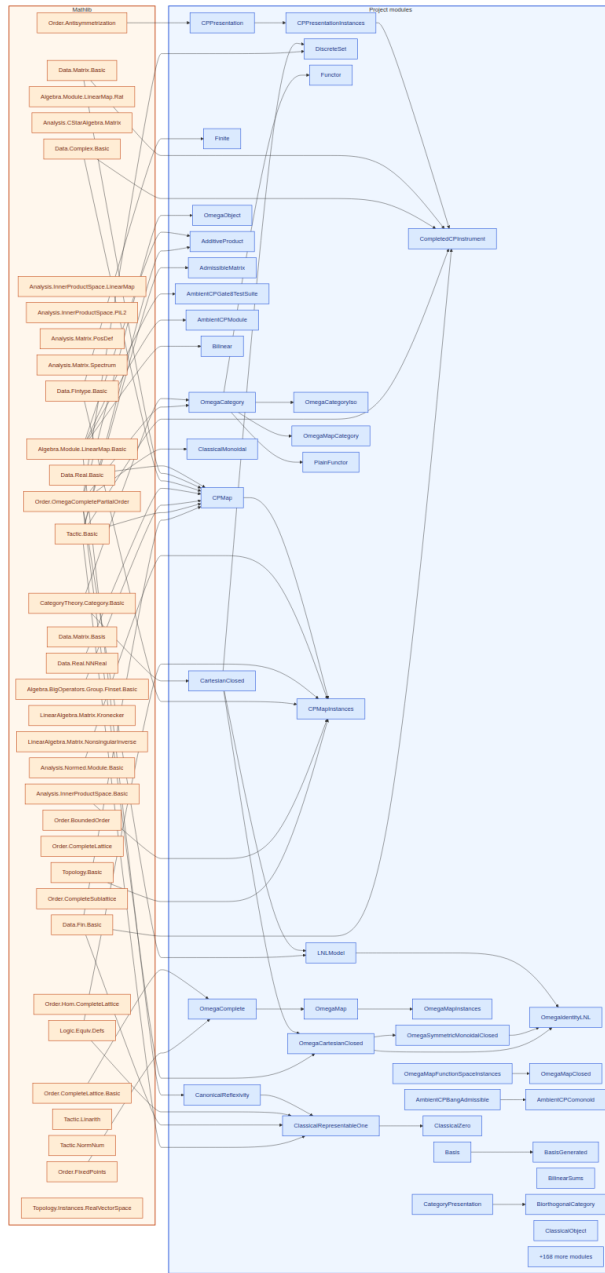

**Figure 7:** Lean module dependencies for §4 (quantum relations and qCPOs). Amber box: Mathlib imports (34 listed). Blue box: project modules (208).

```
noncomputable def ofKraus (K : KrausFamily n m) : CompletedCP n m :=
  toAntisymmetrization (* <= *) <K>
```

#### 4.4.5 Definition of the completed CP class of zero

**Definition.** The zero is a completed CP class.

**Construction.** Defined to be the CP map with Kraus family the zero.

**Lean 4 source** [QLambda/Domain/CPPresentationInstances.lean](#)

```
noncomputable def zero : CompletedCP n m :=
  ofKraus KrausFamily.zero
```

#### 4.4.6 Definition of the completed CP class of the identity

**Definition.** The identity of  $n$  is a completed CP class.

**Construction.** Defined to be the CP map with Kraus family the identity on dimension  $n$ .

**Lean 4 source** [QLambda/Domain/CPPresentationInstances.lean](#)

```
noncomputable def identity (n : Nat) : CompletedCP n n :=
  ofKraus (KrausFamily.identity n)
```

#### 4.4.7 Definition of the zero-qubit allocation matrix of completed CP classes

**Definition.** The zero-qubit allocation matrix of  $q$  is an element of  $\text{KrausOperator } (\text{QDim } q) (\text{QDim } (q + 1))$ .

**Construction.** The map sending  $i \ j$  to  $\text{if } i.\text{val} = j.\text{val} \text{ then } 1 \text{ else } 0$ .

**Lean 4 source** [QLambda/Domain/CPPresentationInstances.lean](#)

```
def allocZeroMatrix (q : Nat) :
  KrausOperator (CQ.QDim q) (CQ.QDim (q + 1)) :=
  fun i j => if i.val = j.val then 1 else 0
```

#### 4.4.8 Definition of the completed CP class of the fresh zero-qubit allocation

**Definition.** The fresh zero-qubit allocation of  $q$  is a completed CP class.

**Construction.** Defined to be the CP map with Kraus family  $[\text{allocZeroMatrix } q]$ .

**Lean 4 source** [QLambda/Domain/CPPresentationInstances.lean](#)

```
noncomputable def new0 (q : Nat) :
  CompletedCP (CQ.QDim q) (CQ.QDim (q + 1)) :=
  ofKraus [allocZeroMatrix q]
```

#### 4.4.9 Definition of the completed CP class of the Pauli-X gate

**Definition.** The Pauli-X gate of  $w$  is a completed CP class.

**Construction.** Defined to be the CP map with Kraus family  $[xMatrix\ w]$ .

**Lean 4 source** [QLambda/Domain/CPPresentationInstances.lean](#)

```
noncomputable def x {q : Nat} (w : Fin q) :  
  CompletedCP (CQ.QDim q) (CQ.QDim q) :=  
  ofKraus [Composer.xMatrix w]
```

#### 4.4.10 Definition of the completed CP class of the Hadamard gate

**Definition.** The Hadamard gate of  $w$  is a completed CP class.

**Construction.** Defined to be the CP map with Kraus family  $[hMatrix\ w]$ .

**Lean 4 source** [QLambda/Domain/CPPresentationInstances.lean](#)

```
noncomputable def h {q : Nat} (w : Fin q) :  
  CompletedCP (CQ.QDim q) (CQ.QDim q) :=  
  ofKraus [Composer.hMatrix w]
```

#### 4.4.11 Definition of the completed CP class of the T gate

**Definition.** The T gate of  $w$  is a completed CP class.

**Construction.** Defined to be the CP map with Kraus family  $[tMatrix\ w]$ .

**Lean 4 source** [QLambda/Domain/CPPresentationInstances.lean](#)

```
noncomputable def t {q : Nat} (w : Fin q) :  
  CompletedCP (CQ.QDim q) (CQ.QDim q) :=  
  ofKraus [Composer.tMatrix w]
```

#### 4.4.12 Definition of the completed CP class of the Y-rotation gate

**Definition.** The Y-rotation gate of  $\theta$  and  $w$  is a completed CP class.

**Construction.** Defined to be the CP map with Kraus family  $[ryMatrix\ \theta\ w]$ .

**Lean 4 source** [QLambda/Domain/CPPresentationInstances.lean](#)

```
noncomputable def ry {q : Nat} (? : ?) (w : Fin q) :  
  CompletedCP (CQ.QDim q) (CQ.QDim q) :=  
  ofKraus [Composer.ryMatrix ? w]
```

#### 4.4.13 Definition of the completed CP class of the controlled-NOT gate

**Definition.** The controlled-NOT gate of `control` and `target` is a completed CP class.

**Construction.** Defined to be the CP map with Kraus family  $[cxMatrix\ control\ target]$ .

**Lean 4 source** [QLambda/Domain/CPPresentationInstances.lean](#)



```

noncomputable def cx {q : Nat} (control target : Fin q) :
  CompletedCP (CQ.QDim q) (CQ.QDim q) :=
  ofKraus [Composer.cxMatrix control target]

```

#### 4.4.14 Monotonicity of the map determined by a Kraus family

**Statement.** For Kraus families  $K, L$ : if  $K$  refines  $L$  residually, then  $\text{ofKraus } K \leq \text{ofKraus } L$ .

**Proof.** The claim follows directly from the definitions of the objects involved.

**Lean 4 source** [QLambda/Domain/CPPresentationInstances.lean](#)

```

theorem ofKraus_mono {K L : KrausFamily n m}
  (hKL : KrausFamily.ResidualRefines K L) :
  ofKraus K <= ofKraus L := by
  exact toAntisymmetrization_mono hKL

```

#### 4.4.15 The map determined by a Kraus family respects semantic equality

**Statement.** For Kraus families  $K, L$ : if  $K$  and  $L$  have the same semantics, then the CP map with Kraus family  $K$  equals the CP map with Kraus family  $L$ .

**Proof.** Equality is proved by showing both inequalities. It follows from antisymmetry of the order and the monotonicity of the map determined by a Kraus family.

**Lean 4 source** [QLambda/Domain/CPPresentationInstances.lean](#)

```

theorem ofKraus_eq_of_semEq {K L : KrausFamily n m}
  (hKL : KrausFamily.SemEq K L) :
  ofKraus K = ofKraus L := by
  apply le_antisymm
  * exact ofKraus_mono (KrausFamily.residualRefines_of_semEq hKL)
  * exact ofKraus_mono
    (KrausFamily.residualRefines_of_semEq
      (KrausFamily.applySemEq_symm hKL))

```

#### 4.4.16 Monotonicity of the map determined by a Kraus family of a composite, in the left argument

**Statement.** For Kraus families  $M, K, L$ : if  $K$  refines  $L$  residually, then  $\text{ofKraus } (\text{KrausFamily.comp } M K) \leq \text{ofKraus } (\text{KrausFamily.comp } M L)$ .

**Proof.** This is an instance of the monotonicity of the map determined by a Kraus family, applied to the fact that residual CP refinement is preserved by postcomposition.

**Lean 4 source** [QLambda/Domain/CPPresentationInstances.lean](#)

```

theorem ofKraus_comp_mono_left (M : KrausFamily m ?)
  {K L : KrausFamily n m} (hKL : KrausFamily.ResidualRefines K L) :
  ofKraus (KrausFamily.comp M K) <=
  ofKraus (KrausFamily.comp M L) :=
  ofKraus_mono (KrausFamily.residualRefines_comp_left M hKL)

```

#### 4.4.17 Monotonicity of the map determined by a Kraus family of a composite, in the right argument

**Statement.** For Kraus families  $M, K, L$ : if  $K$  refines  $L$  residually, then  $\text{ofKraus } (\text{KrausFamily.comp } K \ M) \leq \text{ofKraus } (\text{KrausFamily.comp } L \ M)$ .

**Proof.** This is an instance of the monotonicity of the map determined by a Kraus family, applied to the fact that residual CP refinement is preserved by precomposition.

**Lean 4 source** [QLambda/Domain/CPPresentationInstances.lean](#)

```
theorem ofKraus_comp_mono_right (M : KrausFamily ? n)
  {K L : KrausFamily n m} (hKL : KrausFamily.ResidualRefines K L) :
  ofKraus (KrausFamily.comp K M) <=
    ofKraus (KrausFamily.comp L M) :=
  ofKraus_mono (KrausFamily.residualRefines_comp_right M hKL)
```

#### 4.4.18 Associativity of the map determined by a Kraus family of a composite

**Statement.** For a natural number  $r$ , Kraus families  $M, L, K$ : the CP map with Kraus family the composite of  $M$  after  $\text{KrausFamily.comp } L \ K$  equals the CP map with Kraus family the composite of  $\text{KrausFamily.comp } M \ L$  after  $K$ .

**Proof.** The key step rewrites with the fact that composition for Kraus families is associative.

**Lean 4 source** [QLambda/Domain/CPPresentationInstances.lean](#)

```
theorem ofKraus_comp_assoc {r : Nat}
  (M : KrausFamily ? r) (L : KrausFamily m ?)
  (K : KrausFamily n m) :
  ofKraus (KrausFamily.comp M (KrausFamily.comp L K)) =
    ofKraus (KrausFamily.comp (KrausFamily.comp M L) K) := by
  rw [KrausFamily.comp_assoc]
```

#### 4.4.19 Cartesian closed structure on an enriched category

**Definition.** Cartesian closed structure on an enriched category.

**Construction.** An element consists of `terminal`, `product`, `exponential`, `terminate`, `fst`, `snd`, `pair` and `eval`, subject to the laws `terminal_unique`.

**Lean 4 source** [QLambda/Domain/CartesianClosed.lean](#)

```
structure CartesianClosed (C : OmegaCategory.{u, v}) where
  terminal : C.Obj
  product : C.Obj -> C.Obj -> C.Obj
  exponential : C.Obj -> C.Obj -> C.Obj
  terminate : {A : C.Obj} -> C.Hom A terminal
  fst : {A B : C.Obj} -> C.Hom (product A B) A
  snd : {A B : C.Obj} -> C.Hom (product A B) B
  pair :
    {X A B : C.Obj} -> C.Hom X A -> C.Hom X B -> C.Hom X (product A B)
  eval :
    {A B : C.Obj} -> C.Hom (product (exponential A B) A) B
  curry :
    {X A B : C.Obj} -> C.Hom (product X A) B -> C.Hom X (exponential A B)
```

```

terminal_unique : forall {A : C.Obj} (f : C.Hom A terminal), f = terminate
fst_pair :
  forall {X A B : C.Obj} (f : C.Hom X A) (g : C.Hom X B),
    C.comp fst (pair f g) = f
snd_pair :
  forall {X A B : C.Obj} (f : C.Hom X A) (g : C.Hom X B),
    C.comp snd (pair f g) = g
pair_eta :
  forall {X A B : C.Obj} (f : C.Hom X (product A B)),
    pair (C.comp fst f) (C.comp snd f) = f
beta :
  forall {X A B : C.Obj} (f : C.Hom (product X A) B),
    C.comp eval (pair (C.comp (curry f) fst) snd) = f
curry_mono :
  forall {X A B : C.Obj}, Monotone (@curry X A B)
curry_?Sup :
  forall {X A B : C.Obj} (c : Nat -> C.Hom (product X A) B) (hc : Monotone c),
    curry (OmegaComplete.?Sup c hc) =
      OmegaComplete.?Sup (fun n => curry (c n)) (curry_mono.comp hc)

```

#### 4.4.20 Instrument with branches valued in presentation-independent CP maps

**Definition.** Instrument with branches valued in presentation-independent CP maps.

**Construction.** An element consists of `branch`.

**Lean 4 source** [QLambda/Domain/CompletedCPInstrument.lean](#)

```

structure Instrument (n m outcomes : Nat) where
  branch : Fin outcomes -> CompletedCP n m

```

#### 4.4.21 Definition of the instrument of a quantum instrument

**Definition.** The instrument of a quantum instrument of  $\Phi$  is a quantum instrument.

**Construction.** Constructed by supplying each component of the structure explicitly.

**Lean 4 source** [QLambda/Domain/CompletedCPInstrument.lean](#)

```

noncomputable def ofQuantumInstrument
  {outcomes : Nat} (? : QuantumInstrument n m outcomes) :
  Instrument n m outcomes where
  branch o := ofKraus (? .branch o)

```

#### 4.4.22 Definition of the completed CP class of the measurement

**Definition.** The measurement of  $w$  is a quantum instrument.

**Construction.** Defined to be the instrument of a quantum instrument of the measurement of wire  $w$ .

**Lean 4 source** [QLambda/Domain/CompletedCPInstrument.lean](#)

```

noncomputable def measure {q : Nat} (w : Fin q) :
  Instrument (CQ.QDim q) (CQ.QDim q) 2 :=
  Instrument.ofQuantumInstrument (Composer.measure w)

```

#### 4.4.23 Measurement of the probability of the normalization for completed CP classes

**Statement.** For a natural number  $q$ , an index  $w$ , a matrix  $\rho$ :  $(\sum i : \text{Fin } 2, \text{tr } (\text{KrausFamily}.\text{applyMat } ((\text{measure } w).\text{branch } i) \rho)).\text{re} = (\text{tr } \rho).\text{re}$ .

**Proof.** The key step rewrites with standard identities for finite indices, the definition of the measurement, the action on a matrix of a single-entry element for Kraus families and cyclicity of the trace.

**Lean 4 source** `QLambda/Domain/CompletedCPInstrument.lean`

```
theorem measure_probability_normalization {q : Nat} (w : Fin q)
  (? : Matrix (Fin (CQ.QDim q)) (Fin (CQ.QDim q)) ?) :
  (? i : Fin 2,
    Matrix.trace
      (KrausFamily.applyMat ((Composer.measure w).branch i) ?)).re =
    (Matrix.trace ?).re := by
  rw [Fin.sum_univ_two]
  have hne : (1 : Fin 2) != 0 := by decide
  simp only [Composer.measure, hne, reduceItel]
  rw [KrausFamily.applyMat_single, KrausFamily.applyMat_single]
  rw [Matrix.trace_mul_comm
    (Composer.projector w false * ?)
    (Composer.projector w false).conjTranspose,
    Matrix.trace_mul_comm
    (Composer.projector w true * ?)
    (Composer.projector w true).conjTranspose]
  rw [Composer.projector_conjTranspose, Composer.projector_conjTranspose,
    <- Matrix.mul_assoc, <- Matrix.mul_assoc,
    Composer.projector_mul_self, Composer.projector_mul_self,
    <- Matrix.trace_add, <- Matrix.add_mul,
    Composer.projector_completeness, Matrix.one_mul]
```

#### 4.4.24 Definition of the completed CP class of the reset

**Definition.** The reset of  $w$  is a completed CP class.

**Construction.** Defined to be the CP map with Kraus family  $(\text{reset } w).\text{kraus}$ .

**Lean 4 source** `QLambda/Domain/CompletedCPInstrument.lean`

```
noncomputable def reset {q : Nat} (w : Fin q) :
  CompletedCP (CQ.QDim q) (CQ.QDim q) :=
  ofKraus (Composer.reset w).kraus
```

#### 4.4.25 Ordinary sets and functions, enriched by discrete $\omega$ CPO homs

**Definition.** Ordinary sets and functions, enriched by discrete  $\omega$ CPO homs.

**Construction.** Constructed by supplying each component:  $\text{obj}$ , partial order,  $\omega$ -completeness, identity and composition. The accompanying laws are verified from the definitions.

**Lean 4 source** `QLambda/Domain/DiscreteSet.lean`

```
noncomputable def discreteSetCategory : OmegaCategory.{u + 1, u} where
  Obj := Type u
```

```

hom A B :=
  { Carrier := SetHom A B
    partialOrder := inferInstance
    omegaComplete := inferInstance }
id := SetHom.id _
comp := SetHom.comp
comp_mono_left f := by
  intro g h hgh
  subst h
  rfl
comp_mono_right g := by
  intro f h hfh
  subst h
  rfl
comp_?Sup_left c hc f := by
  change SetHom.comp (c 0) f = _
  change SetHom.comp (c 0) f = SetHom.comp (c 0) f
  rfl
comp_?Sup_right g c hc := by
  change SetHom.comp g (c 0) = _
  change SetHom.comp g (c 0) = SetHom.comp g (c 0)
  rfl
id_comp f := by
  apply SetHom.ext
  intro x
  rfl
comp_id f := by
  apply SetHom.ext
  intro x
  rfl
assoc h g f := by
  apply SetHom.ext
  intro x
  rfl

```

#### 4.4.26 The discrete enrichment leaves the ordinary Cartesian closed structure of **Set** unchanged

**Definition.** The discrete enrichment leaves the ordinary Cartesian closed structure of **Set** unchanged.

**Construction.** Constructed by supplying each component: terminal, product, exponential, terminate, first projection, second projection, pair and evaluation, among others. The accompanying laws are verified from the definitions.

#### Lean 4 source `QLambda/Domain/DiscreteSet.lean`

```

noncomputable def discreteSetCartesianClosed :
  CartesianClosed (discreteSetCategory.{u}) where
  terminal := PUnit
  product := Prod
  exponential := fun A B => A -> B
  terminate :=
    <fun _ => PUnit.unit>
  fst := <Prod.fst>
  snd := <Prod.snd>
  pair := fun f g => <fun x => (f x, g x)>

```

```

eval := <fun p => p.1 p.2>
curry := fun f => <fun x a => f (x, a)>
terminal_unique := by
  intro A f
  apply SetHom.ext
  intro x
  exact Subsingleton.elim _ _
fst_pair := by
  intro X A B f g
  apply SetHom.ext
  intro x
  rfl
snd_pair := by
  intro X A B f g
  apply SetHom.ext
  intro x
  rfl
pair_eta := by
  intro X A B f
  apply SetHom.ext
  intro x
  exact Prod.eta _
beta := by
  intro X A B f
  apply SetHom.ext
  intro p
  cases p
  rfl
curry_mono := by
  intro X A B f g h
  exact congrArg (fun k : SetHom (X x A) B =>
    (<fun x a => k (x, a)> : SetHom X (A -> B))) h
curry_?Sup := by
  intro X A B c hc
  change (<fun x a => c 0 (x, a)> : SetHom X (A -> B)) = _
  change (<fun x a => c 0 (x, a)> : SetHom X (A -> B)) =
    <fun x a => c 0 (x, a)>
  rfl

```

#### 4.4.27 A quantum set is finite when it has finitely many atoms

**Definition.** A quantum set is finite when it has finitely many atoms.

**Construction.** A type belongs to the class when it supplies the listed operations and laws.

#### Lean 4 source `QLambda/Domain/Finite.lean`

```

class Finite (X : QuantumSet) where
  fintype : Fintype X.Atom
  decidable : DecidableEq X.Atom

```

#### 4.4.28 An $\omega$ CPO-enriched functor

**Definition.** An  $\omega$ CPO-enriched functor.

**Construction.** An element consists of `obj`, `map`, `map_mono`, `map_ωSup` and `map_comp`, subject to the laws `map_id`.

#### Lean 4 source `QLambda/Domain/Functor.lean`

```
structure Functor (C D : OmegaCategory) where
  obj : C.Obj -> D.Obj
  map : {A B : C.Obj} -> C.Hom A B -> D.Hom (obj A) (obj B)
  map_mono : forall {A B : C.Obj}, Monotone (@map A B)
  map_?Sup :
    forall {A B : C.Obj} (c : Nat -> C.Hom A B) (hc : Monotone c),
      map (OmegaComplete.?Sup c hc) =
        OmegaComplete.?Sup (fun n => map (c n)) (map_mono.comp hc)
  map_id : forall {A : C.Obj}, map (@C.id A) = D.id
  map_comp :
    forall {A B E : C.Obj} (g : C.Hom B E) (f : C.Hom A B),
      map (C.comp g f) = D.comp (map g) (map f)
```

#### 4.4.29 A strong symmetric monoidal adjunction between CPO-enriched categories

**Definition.** A strong symmetric monoidal adjunction between CPO-enriched categories. The adjunction functors are ordinary functors: important models such as `Set`  $\dashv$  `qRel` do not preserve the selected hom orders in both directions.

**Construction.** An element consists of `nonlinear`, `linear`, `nonlinearClosed`, `linearClosed`, `F`, `G`, `toLinear` and `toNonlinear`.

#### Lean 4 source `QLambda/Domain/LNLModel.lean`

```
structure LNLModel where
  nonlinear : OmegaCategory.{u, v}
  linear : OmegaCategory.{u, v}
  nonlinearClosed : CartesianClosed nonlinear
  linearClosed : SymmetricMonoidalClosed linear
  F : nonlinear.PlainFunctor linear
  G : linear.PlainFunctor nonlinear
  toLinear :
    {A : nonlinear.Obj} -> {B : linear.Obj} ->
      nonlinear.Hom A (G.obj B) -> linear.Hom (F.obj A) B
  toNonlinear :
    {A : nonlinear.Obj} -> {B : linear.Obj} ->
      linear.Hom (F.obj A) B -> nonlinear.Hom A (G.obj B)
  toLinear_toNonlinear :
    forall {A : nonlinear.Obj} {B : linear.Obj}
      (f : linear.Hom (F.obj A) B),
      toLinear (toNonlinear f) = f
  toNonlinear_toLinear :
    forall {A : nonlinear.Obj} {B : linear.Obj}
      (f : nonlinear.Hom A (G.obj B)),
      toNonlinear (toLinear f) = f
  adjunction_mono :
    forall {A : nonlinear.Obj} {B : linear.Obj},
      Monotone (@toLinear A B)
  F_unit : linear.Iso (F.obj nonlinearClosed.terminal) linearClosed.unit
  F_tensor :
```

```
forall A B : nonlinear.Obj,
  linear.Iso (F.obj (nonlinearClosed.product A B))
    (linearClosed.tensor (F.obj A) (F.obj B))
```

#### 4.4.30 Terminal pointed $\omega$ CPO

**Definition.** Terminal pointed  $\omega$ CPO.

**Construction.** Constructed by supplying each component: carrier, partial order and  $\omega$ -completeness. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/OmegaCartesianClosed.lean](#)

```
noncomputable def omegaTerminal : OmegaObject where
  Carrier := PUnit
  partialOrder := inferInstance
  omegaComplete := inferInstance
```

#### 4.4.31 Product pointed $\omega$ CPO

**Definition.** Product pointed  $\omega$ CPO.

**Construction.** Constructed by supplying each component: carrier, partial order and  $\omega$ -completeness. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/OmegaCartesianClosed.lean](#)

```
noncomputable def omegaProduct (A B : OmegaObject) : OmegaObject where
  Carrier := A x B
  partialOrder := inferInstance
  omegaComplete := inferInstance
```

#### 4.4.32 Pointed $\omega$ CPO of continuous maps

**Definition.** Pointed  $\omega$ CPO of continuous maps.

**Construction.** Constructed by supplying each component: carrier, partial order and  $\omega$ -completeness. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/OmegaCartesianClosed.lean](#)

```
noncomputable def omegaExponential (A B : OmegaObject) : OmegaObject where
  Carrier := OmegaMap A B
  partialOrder := inferInstance
  omegaComplete := inferInstance
```

#### 4.4.33 The ordinary category of pointed $\omega$ CPOs is Cartesian closed

**Definition.** The ordinary category of pointed  $\omega$ CPOs is Cartesian closed. This serves as the nonlinear side of concrete LNL models.



**Construction.** Constructed by supplying each component: terminal, product, exponential, terminate, monotonicity, functorial action supremum of an  $\omega$ -chain, first projection and second projection, among others. The accompanying laws are verified from the definitions.

#### Lean 4 source `QLambda/Domain/OmegaCartesianClosed.lean`

```

noncomputable def omegaCartesianClosed :
  CartesianClosed (omegaMapCategory.{u}) where
  terminal := omegaTerminal
  product := omegaProduct
  exponential := omegaExponential
  terminate :=
    { toFun := fun _ => PUnit.unit
      monotone := fun _ _ _ => le_rfl
      map_?Sup := fun _ _ => by
        exact (OmegaComplete.?Sup_const PUnit.unit).symm }
  fst := OmegaMap.fst
  snd := OmegaMap.snd
  pair := OmegaMap.pair
  eval := OmegaMap.eval
  curry := OmegaMap.curry
  terminal_unique := by
    intro A f
    apply OmegaMap.ext
    intro x
    exact Subsingleton.elim _ _
  fst_pair := by
    intro X A B f g
    apply OmegaMap.ext
    intro x
    rfl
  snd_pair := by
    intro X A B f g
    apply OmegaMap.ext
    intro x
    rfl
  pair_eta := by
    intro X A B f
    apply OmegaMap.ext
    intro x
    exact Prod.eta _
  beta := by
    intro X A B f
    apply OmegaMap.ext
    intro p
    cases p
    rfl
  curry_mono := by
    intro X A B f g h x a
    exact h (x, a)
  curry_?Sup := by
    intro X A B c hc
    apply OmegaMap.ext
    intro x
    apply OmegaMap.ext
    intro a

```

rfl

#### 4.4.34 A small category whose homs are pointed $\omega$ CPOs and whose composition is $\omega$ -continuous in each argument

**Definition.** A small category whose homs are pointed  $\omega$ CPOs and whose composition is  $\omega$ -continuous in each argument.

**Construction.** An element consists of `Obj`, `id`, `comp`, `comp_mono_left`, `comp_mono_right`, `comp_ωSup_left`, `comp_ωSup_right` and `assoc`, subject to the laws `hom`, `id_comp` and `comp_id`.

#### Lean 4 source `QLambda/Domain/OmegaCategory.lean`

```
structure OmegaCategory where
  Obj : Type u
  hom : Obj -> Obj -> OmegaObject.{v}
  id : {A : Obj} -> hom A A
  comp : {A B C : Obj} -> hom B C -> hom A B -> hom A C
  comp_mono_left :
    forall {A B C : Obj} (g : hom A B), Monotone (fun f : hom B C => comp f g)
  comp_mono_right :
    forall {A B C : Obj} (f : hom B C), Monotone (fun g : hom A B => comp f g)
  comp_?Sup_left :
    forall {A B C : Obj} (c : Nat -> hom B C) (hc : Monotone c) (g : hom A B),
      comp (OmegaComplete.?Sup c hc) g =
        OmegaComplete.?Sup (fun n => comp (c n) g)
          ((comp_mono_left g).comp hc)
  comp_?Sup_right :
    forall {A B C : Obj} (f : hom B C) (c : Nat -> hom A B) (hc : Monotone c),
      comp f (OmegaComplete.?Sup c hc) =
        OmegaComplete.?Sup (fun n => comp f (c n))
          ((comp_mono_right f).comp hc)
  id_comp : forall {A B : Obj} (f : hom A B), comp id f = f
  comp_id : forall {A B : Obj} (f : hom A B), comp f id = f
  assoc :
    forall {A B C D : Obj} (h : hom C D) (g : hom B C) (f : hom A B),
      comp (comp h g) f = comp h (comp g f)
```

#### 4.4.35 Definition of the module morphism

**Definition.** The module morphism of `C`, `A` and `B` is an element of `Type v`.

**Construction.** Defined to be `C.hom A B infixr:10 "  $\rightarrow_\omega$  " => Hom`.

#### Lean 4 source `QLambda/Domain/OmegaCategory.lean`

```
abbrev Hom (C : OmegaCategory) (A B : C.Obj) : Type v :=
  C.hom A B

infixr:10 " --> ? " => Hom
```

#### 4.4.36 Isomorphisms in an enriched category

**Definition.** Isomorphisms in an enriched category.

**Construction.** An element consists of `inv`, subject to the laws `hom`, `hom_inv` and `inv_hom`.

**Lean 4 source** [QLambda/Domain/OmegaCategoryIso.lean](#)

```
structure Iso (C : OmegaCategory) (A B : C.Obj) where
  hom : C.Hom A B
  inv : C.Hom B A
  hom_inv : C.comp hom inv = C.id
  inv_hom : C.comp inv hom = C.id
```

#### 4.4.37 A partial order with suprema of increasing $\mathbb{N}$ -chains

**Definition.** A partial order with suprema of increasing  $\mathbb{N}$ -chains. Pointedness is separate: only least-fixed-point constructions require `OrderBot`.

**Construction.** A type belongs to the class when it supplies the listed operations and laws.

**Lean 4 source** [QLambda/Domain/OmegaComplete.lean](#)

```
class OmegaComplete (D : Type u) [PartialOrder D] where
  ?Sup : (c : Nat -> D) -> Monotone c -> D
  le_?Sup : forall (c : Nat -> D) (hc : Monotone c) (n : Nat), c n <= ?Sup c hc
  ?Sup_le : forall (c : Nat -> D) (hc : Monotone c) (x : D),
    (forall n, c n <= x) -> ?Sup c hc <= x
```

#### 4.4.38 Uniqueness of the supremum of an $\omega$ -chain

**Statement.** If  $c$  is monotone; for every  $n$ ,  $c\ n \leq x$ ; and if for every  $y$ , for every  $n$ ,  $c\ n \leq y$ , then  $x \leq y$ , then the supremum of an  $\omega$ -chain of  $c$  and  $hc$  equals  $x$ .

**Proof.** Equality is proved by showing both inequalities. It follows from antisymmetry of the order and the hypothesis that if for every  $y$ , for every  $n$ ,  $c\ n \leq y$ , then  $x \leq y$ .

**Lean 4 source** [QLambda/Domain/OmegaComplete.lean](#)

```
theorem ?Sup_unique (c : Nat -> D) (hc : Monotone c) {x : D}
  (hupper : forall n, c n <= x) (hleat : forall y, (forall n, c n <= y) ->
    x <= y) :
  OmegaComplete.?Sup c hc = x := by
  apply le_antisymm
  * exact OmegaComplete.?Sup_le c hc x hupper
  * exact hleat _ (OmegaComplete.le_?Sup c hc)
```

#### 4.4.39 Monotonicity of the supremum of an $\omega$ -chain

**Statement.** If  $c$  is monotone;  $d$  is monotone; and for every  $n$ ,  $c\ n \leq d\ n$ , then  $\text{OmegaComplete}.\omega\text{Sup}\ c\ hc \leq \text{OmegaComplete}.\omega\text{Sup}\ d\ hd$ .

**Proof.** It follows from the hypothesis that for every  $n$ ,  $c\ n \leq d\ n$ .

#### Lean 4 source `QLambda/Domain/OmegaComplete.lean`

```
theorem ?Sup_mono {c d : Nat -> D} (hc : Monotone c) (hd : Monotone d)
  (hcd : forall n, c n <= d n) :
  OmegaComplete.?Sup c hc <= OmegaComplete.?Sup d hd := by
  apply OmegaComplete.?Sup_le
  intro n
  exact (hcd n).trans (OmegaComplete.le_?Sup d hd n)
```

#### 4.4.40 Supremum of an $\omega$ -chain of the const for $\omega$ -complete orders

**Statement.** The supremum of an  $\omega$ -chain of `fun _ => monotone_const` equals `x`.

**Proof.** The claim follows directly from the definitions of the objects involved.

#### Lean 4 source `QLambda/Domain/OmegaComplete.lean`

```
theorem ?Sup_const (x : D) :
  OmegaComplete.?Sup (fun _ : Nat => x) monotone_const = x := by
  apply ?Sup_unique
  * exact fun _ => le_rfl
  * intro y hy
  exact hy 0
```

#### 4.4.41 Definition of the $\omega$ identity functor

**Definition.** The  $\omega$  identity functor is an element of `(omegaMapCategory.{u}).PlainFunctor omegaMapCategory`.

**Construction.** Constructed by supplying each component: `obj`, functorial action, functorial action identity and functorial action composite. The accompanying laws are verified from the definitions.

#### Lean 4 source `QLambda/Domain/OmegaIdentityLNL.lean`

```
private noncomputable def omegaIdentityFunctor :
  (omegaMapCategory.{u}).PlainFunctor omegaMapCategory where
  obj := id
  map := id
  map_id := rfl
  map_comp := fun _ _ => rfl
```

#### 4.4.42 The identity adjunction supplies a fully concrete classical LNL model

**Definition.** The identity adjunction supplies a fully concrete classical LNL model. The intended quantum model instead uses the published category of pointed quantum CPOs as its linear side. Finite CP maps and instruments embed the circuit fragment into that category; they are not themselves asserted to form the higher-order monoidal-closed category.

**Construction.** Constructed by supplying each component: nonlinear, linear, nonlinear closed term, linear closed term, `f`, `g`, passage to linear and passage to nonlinear, among others. The accompanying laws are verified from the definitions.

#### Lean 4 source `QLambda/Domain/OmegaIdentityLNL.lean`

```

noncomputable def omegaIdentityLNL : LNLModel.{u + 1, u} where
  nonlinear := omegaMapCategory
  linear := omegaMapCategory
  nonlinearClosed := omegaCartesianClosed
  linearClosed := omegaSymmetricMonoidalClosed
  F := omegaIdentityFunctor
  G := omegaIdentityFunctor
  toLinear := fun f => f
  toNonlinear := fun f => f
  toLinear_toNonlinear := fun _ => rfl
  toNonlinear_toLinear := fun _ => rfl
  adjunction_mono := by
    intro A B f g h
    exact h
  F_unit :=
    { hom := OmegaMap.id
      inv := OmegaMap.id
      hom_inv := OmegaMap.id_comp _
      inv_hom := OmegaMap.id_comp _ }
  F_tensor := fun _ _ =>
    { hom := OmegaMap.id
      inv := OmegaMap.id
      hom_inv := OmegaMap.id_comp _
      inv_hom := OmegaMap.id_comp _ }

```

#### 4.4.43 The structure of a $\omega$ -continuous map

**Definition.** A structure bundling the data of a  $\omega$ -continuous map.

**Construction.** An element consists of `toFun` and `map_ωSup`, subject to the laws `monotone`.

**Lean 4 source** `QLambda/Domain/OmegaMap.lean`

```

structure OmegaMap
  (D : Type u) (E : Type v)
  [PartialOrder D] [OmegaComplete D]
  [PartialOrder E] [OmegaComplete E] where
  toFun : D → E
  monotone : Monotone toFun
  map_?Sup : forall (c : Nat → D) (hc : Monotone c),
    toFun (OmegaComplete.?Sup c hc) =
      OmegaComplete.?Sup (fun n => toFun (c n)) (monotone.comp hc)

```

#### 4.4.44 The canonical $\omega$ CPO-enriched category of pointed $\omega$ CPOs and $\omega$ -continuous maps

**Definition.** The canonical  $\omega$ CPO-enriched category of pointed  $\omega$ CPOs and  $\omega$ -continuous maps.

**Construction.** Constructed by supplying each component: `obj`, partial order,  $\omega$ -completeness, identity, composition, identity composite, composite identity and associativity. The accompanying laws are verified from the definitions.

**Lean 4 source** `QLambda/Domain/OmegaMapCategory.lean`

```

noncomputable def omegaMapCategory : OmegaCategory.{u + 1, u} where

```

```

Obj := OmegaObject.{u}
hom A B :=
  { Carrier := OmegaMap A B
    partialOrder := inferInstance
    omegaComplete := OmegaMap.instOmegaCompleteFunctionSpace }
id := OmegaMap.id
comp := OmegaMap.comp
comp_mono_left g := by
  intro f_1 f_2 h x
  exact h (g x)
comp_mono_right f := by
  intro g_1 g_2 h x
  exact f.monotone (h x)
comp_?Sup_left c hc g := by
  apply OmegaMap.ext
  intro x
  rfl
comp_?Sup_right f c hc := by
  apply OmegaMap.ext
  intro x
  exact f.map_?Sup (fun n => c n x)
  (fun _ _ h => hc h x)
id_comp := OmegaMap.id_comp
comp_id := OmegaMap.comp_id
assoc := OmegaMap.comp_assoc

```

#### 4.4.45 Definition of the first projection of closed structures

**Definition.** The first projection is a  $\omega$ -continuous map.

**Construction.** Constructed by supplying each component: passage to fun and monotonicity. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/OmegaMapClosed.lean](#)

```

def fst : OmegaMap (A x B) A where
  toFun := Prod.fst
  monotone := fun _ _ h => h.1
  map_?Sup _ _ := rfl

```

#### 4.4.46 Definition of the second projection of closed structures

**Definition.** The second projection is a  $\omega$ -continuous map.

**Construction.** Constructed by supplying each component: passage to fun and monotonicity. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/OmegaMapClosed.lean](#)

```

def snd : OmegaMap (A x B) B where
  toFun := Prod.snd
  monotone := fun _ _ h => h.2
  map_?Sup _ _ := rfl

```

#### 4.4.47 Definition of the pair of closed structures

**Definition.** The pair of  $f$  and  $g$  is a  $\omega$ -continuous map.

**Construction.** Constructed by supplying each component: monotonicity. The accompanying laws are verified from the definitions.

##### Lean 4 source `QLambda/Domain/OmegaMapClosed.lean`

```
def pair (f : OmegaMap X A) (g : OmegaMap X B) :
  OmegaMap X (A x B) where
  toFun x := (f x, g x)
  monotone := fun h_1 h_2 h => <f.monotone h, g.monotone h>
  map_?Sup c hc := by
    apply Prod.ext
    * exact f.map_?Sup c hc
    * exact g.map_?Sup c hc
```

#### 4.4.48 Evaluation is jointly $\omega$ -continuous

**Definition.** Evaluation is jointly  $\omega$ -continuous. The proof uses the diagonal cofinality of a pair of increasing chains.

**Construction.** Constructed by supplying each component: monotonicity and functorial action supremum of an  $\omega$ -chain. The accompanying laws are verified from the definitions.

##### Lean 4 source `QLambda/Domain/OmegaMapClosed.lean`

```
noncomputable def eval : OmegaMap (OmegaMap A B x A) B where
  toFun p := p.1 p.2
  monotone := by
    intro p q hpq
    exact (hpq.1 p.2).trans (q.1.monotone hpq.2)
  map_?Sup := by
    intro c hc
    let fs : Nat -> OmegaMap A B := fun n => (c n).1
    let xs : Nat -> A := fun n => (c n).2
    have hfs : Monotone fs := fun _ _ h => (hc h).1
    have hxs : Monotone xs := fun _ _ h => (hc h).2
    change
      OmegaComplete.?Sup
        (fun n => fs n (OmegaComplete.?Sup xs hxs))
        (fun _ _ h => hfs h _) =
      OmegaComplete.?Sup (fun n => fs n (xs n))
        (fun a b hab =>
          (hfs hab (xs a)).trans ((fs b).monotone (hxs hab)))
    apply le_antisymm
    * apply OmegaComplete.?Sup_le
      intro n
      rw [(fs n).map_?Sup xs hxs]
      apply OmegaComplete.?Sup_le
      intro m
      let k := max n m
      have hnk : n <= k := Nat.le_max_left _ _
      have hmk : m <= k := Nat.le_max_right _ _
      calc
```

```

fs n (xs m) <= fs k (xs m) := hfs hnk _
_ <= fs k (xs k) := (fs k).monotone (hxs hmk)
_ <= OmegaComplete.?Sup (fun j => fs j (xs j))
  (fun a b hab =>
    (hfs hab (xs a)).trans ((fs b).monotone (hxs hab))) :=
  OmegaComplete.le_?Sup (fun j => fs j (xs j))
  (fun a b hab =>
    (hfs hab (xs a)).trans ((fs b).monotone (hxs hab))) k
* apply OmegaComplete.?Sup_le
intro n
calc
  fs n (xs n) <= fs n (OmegaComplete.?Sup xs hxs) :=
    (fs n).monotone (OmegaComplete.le_?Sup xs hxs n)
  _ <= OmegaComplete.?Sup
    (fun j => fs j (OmegaComplete.?Sup xs hxs))
    (fun _ _ h => hfs h _) :=
    OmegaComplete.le_?Sup
      (fun j => fs j (OmegaComplete.?Sup xs hxs))
      (fun _ _ h => hfs h _) n

```

#### 4.4.49 Definition of the currying of closed structures

**Definition.** The currying of  $f$  is a  $\omega$ -continuous map.

**Construction.** Constructed by supplying each component: monotonicity and functorial action supremum of an  $\omega$ -chain. The accompanying laws are verified from the definitions.

#### Lean 4 source `QLambda/Domain/OmegaMapClosed.lean`

```

noncomputable def curry (f : OmegaMap (X x A) B) :
  OmegaMap X (OmegaMap A B) where
  toFun x :=
    { toFun := fun a => f (x, a)
      monotone := fun _ _ h => f.monotone <le_rfl, h>
      map_?Sup := by
        intro c hc
        let d : Nat -> X x A := fun n => (x, c n)
        have hd : Monotone d := fun _ _ h => <le_rfl, hc h>
        have hs :
          OmegaComplete.?Sup d hd =
            (x, OmegaComplete.?Sup c hc) := by
              apply Prod.ext
              * exact OmegaComplete.?Sup_const x
              * rfl
        rw [ <- hs, f.map_?Sup d hd ]
    }
  monotone := by
    intro x y hxy a
    exact f.monotone <hxy, le_rfl>
  map_?Sup := by
    intro c hc
    apply OmegaMap.ext
    intro a
    rw [?Sup_apply]
    let d : Nat -> X x A := fun n => (c n, a)

```



```

have hd : Monotone d := fun _ _ h => <hc h, le_refl>
have hs :
  OmegaComplete.?Sup d hd =
    (OmegaComplete.?Sup c hc, a) := by
  apply Prod.ext
  * rfl
  * exact OmegaComplete.?Sup_const a
change f (OmegaComplete.?Sup c hc, a) =
  OmegaComplete.?Sup (fun n => f (c n, a))
  (fun _ _ h => f.monotone <hc h, le_refl>)
rw [ <- hs, f.map_?Sup d hd]

```

#### 4.4.50 Definition of the uncurrying of closed structures

**Definition.** The uncurrying of  $f$  is a  $\omega$ -continuous map.

**Construction.** Defined to be the composition of the pair of  $f.comp$   $fst$  and  $snd$ .

##### Lean 4 source `QLambda/Domain/OmegaMapClosed.lean`

```

noncomputable def uncurry (f : OmegaMap X (OmegaMap A B)) :
  OmegaMap (X x A) B :=
  eval.comp (pair (f.comp fst) snd)

```

#### 4.4.51 Pointwise formula for the currying

**Statement.** The currying of  $f$ ,  $x$ ,  $a$  equals the  $f$  of  $x$ ,  $a$ . Formally:  $\text{curry } f \ x \ a = f \ (x, a)$ .

**Proof.** By definition. Unfolding the currying turns the left-hand side, the currying of  $f$ ,  $x$ ,  $a$ , into the right-hand side, the  $f$  of  $x$ ,  $a$ ; the two sides are the same term.

##### Lean 4 source `QLambda/Domain/OmegaMapClosed.lean`

```

@[simp] theorem curry_apply (f : OmegaMap (X x A) B) (x : X) (a : A) :
  curry f x a = f (x, a) :=
  rfl

```

#### 4.4.52 Pointwise formula for the uncurrying

**Statement.** The uncurrying of  $f$  and  $x$ ,  $a$  equals the  $f$  of  $x$  and  $a$ .

**Proof.** By definition. Unfolding the uncurrying turns the left-hand side, the uncurrying of  $f$  and  $x$ ,  $a$ , into the right-hand side, the  $f$  of  $x$  and  $a$ ; the two sides are the same term.

##### Lean 4 source `QLambda/Domain/OmegaMapClosed.lean`

```

@[simp] theorem uncurry_apply (f : OmegaMap X (OmegaMap A B))
  (x : X) (a : A) :
  uncurry f (x, a) = f x a :=
  rfl

```

#### 4.4.53 Currying of an uncurrying

**Statement.** The currying of the uncurrying of  $f$  equals  $f$ . Formally:  $\text{curry } (\text{uncurry } f) = f$ .

**Proof.** Both sides are compared pointwise (by extensionality).

**Lean 4 source** [QLambda/Domain/OmegaMapClosed.lean](#)

```
@[simp] theorem curry_uncurry (f : OmegaMap X (OmegaMap A B)) :  
  curry (uncurry f) = f := by  
  ext x a  
  rfl
```

#### 4.4.54 Uncurrying of a currying

**Statement.** The uncurrying of the currying of  $f$  equals  $f$ . Formally:  $\text{uncurry } (\text{curry } f) = f$ .

**Proof.** Both sides are compared pointwise (by extensionality). The hypotheses are unpacked into their constituent data.

**Lean 4 source** [QLambda/Domain/OmegaMapClosed.lean](#)

```
@[simp] theorem uncurry_curry (f : OmegaMap (X x A) B) :  
  uncurry (curry f) = f := by  
  ext p  
  cases p  
  rfl
```

#### 4.4.55 Pointwise formula for the supremum of an $\omega$ -chain

**Statement.** If  $c$  is monotone, then  $(\text{OmegaComplete}.\omega\text{Sup } c \text{ hc}) \ x$  equals the supremum of an  $\omega$ -chain of  $\text{fun } n \Rightarrow c \ n \ x$  and  $\text{fun } \_ \_ h \Rightarrow hc \ h \ x$ .

**Proof.** By definition: the left-hand side,  $(\text{OmegaComplete}.\omega\text{Sup } c \text{ hc}) \ x$ , and the right-hand side, the supremum of an  $\omega$ -chain of  $\text{fun } n \Rightarrow c \ n \ x$  and  $\text{fun } \_ \_ h \Rightarrow hc \ h \ x$ , unfold to the same term.

**Lean 4 source** [QLambda/Domain/OmegaMapFunctionSpaceInstances.lean](#)

```
@[simp] theorem ?Sup_apply (c : Nat -> OmegaMap D E) (hc : Monotone c)  
  (x : D) :  
  (OmegaComplete.?Sup c hc) x =  
  OmegaComplete.?Sup (fun n => c n x)  
    (fun _ _ h => hc h x) :=  
  rfl
```

#### 4.4.56 Definition of the $\omega$ -continuous map of the identity

**Definition.** The identity is a  $\omega$ -continuous map.

**Construction.** Constructed by supplying each component: monotonicity. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/OmegaMapInstances.lean](#)

```
def id : OmegaMap D D where
  toFun x := x
  monotone := monotone_id
  map_?Sup _ _ := rfl
```

#### 4.4.57 Definition of the composition of $\omega$ -continuous maps

**Definition.** The composition of  $f$  and  $g$  is a  $\omega$ -continuous map.

**Construction.** Constructed by supplying each component: monotonicity. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/OmegaMapInstances.lean](#)

```
def comp (f : OmegaMap E F) (g : OmegaMap D E) : OmegaMap D F where
  toFun x := f (g x)
  monotone := f.monotone.comp g.monotone
  map_?Sup c hc := by
    rw [g.map_?Sup c hc, f.map_?Sup]
```

#### 4.4.58 Pointwise formula for the identity

**Statement.** The identity of  $x$  equals  $x$ . Formally:  $\text{id } x = x$ .

**Proof.** By definition. Unfolding the identity turns the left-hand side, the identity of  $x$ , into the right-hand side,  $x$ ; the two sides are the same term.

**Lean 4 source** [QLambda/Domain/OmegaMapInstances.lean](#)

```
@[simp] theorem id_apply (x : D) : id x = x := rfl
```

#### 4.4.59 Pointwise formula for the composition

**Statement.** The composite of  $g$  after  $x$  equals the  $f$  of the  $g$  of  $x$ .

**Proof.** By definition. Unfolding the composition turns the left-hand side, the composite of  $g$  after  $x$ , into the right-hand side, the  $f$  of the  $g$  of  $x$ ; the two sides are the same term.

**Lean 4 source** [QLambda/Domain/OmegaMapInstances.lean](#)

```
@[simp] theorem comp_apply (f : OmegaMap E F) (g : OmegaMap D E) (x : D) :
  f.comp g x = f (g x) := rfl
```

#### 4.4.60 The identity is a left unit for composition for $\omega$ -continuous maps

**Statement.** The composition of  $f$  equals  $f$ . Formally:  $\text{id}.\text{comp } f = f$ .

**Proof.** Both sides are compared pointwise (by extensionality).

**Lean 4 source** [QLambda/Domain/OmegaMapInstances.lean](#)

```
@[simp] theorem id_comp (f : OmegaMap D E) : id.comp f = f := by
  ext
  rfl
```

#### 4.4.61 Composition of an identity

**Statement.** The composition of `id` equals `f`. Formally: `f.comp id = f`.

**Proof.** Both sides are compared pointwise (by extensionality).

**Lean 4 source** [QLambda/Domain/OmegaMapInstances.lean](#)

```
@[simp] theorem comp_id (f : OmegaMap D E) : f.comp id = f := by
  ext
  rfl
```

#### 4.4.62 Composition for $\omega$ -continuous maps is associative

**Statement.** If `OmegaMap F G`, then `(h.comp g).comp f` equals the composition of the composition of `f`.

**Proof.** Both sides are compared pointwise (by extensionality).

**Lean 4 source** [QLambda/Domain/OmegaMapInstances.lean](#)

```
theorem comp_assoc (h : OmegaMap F G) (g : OmegaMap E F) (f : OmegaMap D E) :
  (h.comp g).comp f = h.comp (g.comp f) := by
  ext
  rfl
```

#### 4.4.63 Finite iterates from bottom

**Definition.** Finite iterates from bottom.

**Construction.** Defined by cases on the input:  $0 \mapsto \perp$ ;  $n + 1 \mapsto$  the `f` of the iteration from the bottom element of `f` and `n`.

**Lean 4 source** [QLambda/Domain/OmegaMapInstances.lean](#)

```
def iterateBot (f : OmegaMap D D) : Nat -> D
| 0 => False
| n + 1 => f (iterateBot f n)
```

#### 4.4.64 Monotonicity of the iteration from the bottom element

**Statement.** `iterateBot f` is monotone. Formally: `Monotone (iterateBot f)`.

**Proof.** By induction on `n`. For zero, the claim is one of the premises of the rule; for a successor, the claim follows from the induction hypothesis.

**Lean 4 source** [QLambda/Domain/OmegaMapInstances.lean](#)

```

theorem iterateBot_mono (f : OmegaMap D D) : Monotone (iterateBot f) := by
  apply monotone_nat_of_le_succ
  intro n
  induction n with
  | zero => exact bot_le
  | succ n ih => exact f.monotone ih

```

#### 4.4.65 Least fixed point of an $\omega$ -continuous endomap

**Definition.** Least fixed point of an  $\omega$ -continuous endomap.

**Construction.** Defined to be the supremum of an  $\omega$ -chain of the iteration from the bottom element of  $\mathbb{f}$  and the iterate bottom element monotonicity of  $\mathbb{f}$ .

**Lean 4 source** [QLambda/Domain/OmegaMapInstances.lean](#)

```

noncomputable def fix (f : OmegaMap D D) : D :=
  OmegaComplete.?Sup (iterateBot f) (iterateBot_mono f)

```

#### 4.4.66 Formula for the least fixed point

**Statement.** The  $\mathbb{f}$  of the least fixed point of  $\mathbb{f}$  equals the least fixed point of  $\mathbb{f}$ .

**Proof.** By case analysis on  $n$ . For zero, the claim is one of the premises of the rule; for a successor, the claim is checked directly. The key step rewrites with the definition of the least fixed point and antisymmetry of the order.

**Lean 4 source** [QLambda/Domain/OmegaMapInstances.lean](#)

```

theorem fix_eq (f : OmegaMap D D) : f (fix f) = fix f := by
  unfold fix
  rw [f.map_?Sup]
  apply le_antisymm
  * apply OmegaComplete.?Sup_le
    intro n
    exact OmegaComplete.le_?Sup (iterateBot f) (iterateBot_mono f) (n + 1)
  * apply OmegaComplete.?Sup_le
    intro n
    cases n with
    | zero => exact bot_le
    | succ n =>
      exact OmegaComplete.le_?Sup
        (fun k => f (iterateBot f k))
        (f.monotone.comp (iterateBot_mono f)) n

```

#### 4.4.67 Order bound for the least fixed point, assuming prefixed

**Statement.** If  $\mathbb{f} \ x \leq x$ , then  $\text{fix } f \leq x$ . Formally:  $\text{fix } f \leq x$ .

**Proof.** By induction on  $n$ . For zero, the claim is one of the premises of the rule; for a successor, the claim follows from the induction hypothesis.

**Lean 4 source** [QLambda/Domain/OmegaMapInstances.lean](#)

```

theorem fix_le_of_prefixed (f : OmegaMap D D) {x : D} (hx : f x <= x) :
  fix f <= x := by
  apply OmegaComplete.?Sup_le
  intro n
  induction n with
  | zero => exact bot_le
  | succ n ih => exact (f.monotone ih).trans hx

```

#### 4.4.68 Least fixed points are monotone in their defining functional

**Statement.** Least fixed points are monotone in their defining functional. Formally:  $\text{fix } f \leq \text{fix } g$ .

**Proof.** The claim follows from a chain of equalities (or inequalities). It follows from the order bound for the least fixed point, assuming prefixed.

**Lean 4 source** [QLambda/Domain/OmegaMapInstances.lean](#)

```

theorem fix_mono {f g : OmegaMap D D} (hfg : f <= g) :
  fix f <= fix g := by
  apply fix_le_of_prefixed
  calc
    f (fix g) <= g (fix g) := hfg _
    _ = fix g := fix_eq g

```

#### 4.4.69 A parameter-indexed family of least fixed points

**Definition.** A parameter-indexed family of least fixed points.

**Construction.** Defined to be the least fixed point of the  $f$  of  $p$ .

**Lean 4 source** [QLambda/Domain/OmegaMapInstances.lean](#)

```

noncomputable def paramFix
  {P : Type w} [PartialOrder P] [OmegaComplete P]
  (f : P -> OmegaMap D D) (p : P) : D :=
  fix (f p)

```

#### 4.4.70 Monotonicity of the parametrised least fixed point

**Statement.** If  $f$  is monotone, then  $\text{paramFix } f$  is monotone. Formally:  $\text{Monotone } (\text{paramFix } f)$ .

**Proof.** It follows from the fact that least fixed points are monotone in their defining functional.

**Lean 4 source** [QLambda/Domain/OmegaMapInstances.lean](#)

```

theorem paramFix_mono
  {P : Type w} [PartialOrder P] [OmegaComplete P]
  {f : P -> OmegaMap D D} (hf : Monotone f) :
  Monotone (paramFix f) := by
  intro p q hpq
  exact fix_mono (hf hpq)

```

#### 4.4.71 A bundled $\omega$ -complete partial order

**Definition.** A bundled  $\omega$ -complete partial order.

**Construction.** An element consists of `Carrier`, `partialOrder` and `omegaComplete`.

**Lean 4 source** `QLambda/Domain/OmegaObject.lean`

```
structure OmegaObject where
  Carrier : Type u
  partialOrder : PartialOrder Carrier
  omegaComplete : OmegaComplete Carrier
```

#### 4.4.72 The Cartesian tensor also gives the $\omega$ CPO category a symmetric monoidal closed structure

**Definition.** The Cartesian tensor also gives the  $\omega$ CPO category a symmetric monoidal closed structure.

**Construction.** Constructed by supplying each component: `unit`, `tensor product`, `internal hom`, `tensor product functorial action`, `tensor product functorial action monotonicity left`, `tensor product functorial action monotonicity right`, `tensor product functorial action identity` and `tensor product functorial action composite`, among others. The accompanying laws are verified from the definitions.

**Lean 4 source** `QLambda/Domain/OmegaSymmetricMonoidalClosed.lean`

```
noncomputable def omegaSymmetricMonoidalClosed :
  SymmetricMonoidalClosed (omegaMapCategory.{u}) where
  unit := omegaTerminal
  tensor := omegaProduct
  internalHom := omegaExponential
  tensorMap := fun f g =>
    OmegaMap.pair (f.comp OmegaMap.fst) (g.comp OmegaMap.snd)
  tensorMap_mono_left := by
    intro A B C D g f_1 f_2 h p
    exact <h p.1, le_rfl>
  tensorMap_mono_right := by
    intro A B C D f g_1 g_2 h p
    exact <le_rfl, h p.2>
  tensorMap_id := by
    intro A B
    apply OmegaMap.ext
    intro p
    exact Prod.eta _
  tensorMap_comp := by
    intro A B C D E F f_2 f_1 g_2 g_1
    apply OmegaMap.ext
    intro p
    rfl
  leftUnitor := fun A =>
    { hom := OmegaMap.snd
      inv :=
        { toFun := fun a => (PUnit.unit, a)
          monotone := fun _ _ h => <le_rfl, h>
          map_?Sup := by
            intro c hc
            apply Prod.ext
            * exact (OmegaComplete.?Sup_const PUnit.unit).symm
```

```

      * rfl }
hom_inv := by
  apply OmegaMap.ext
  intro a
  rfl
inv_hom := by
  apply OmegaMap.ext
  intro p
  apply Prod.ext
  * exact Subsingleton.elim _ _
  * rfl }
rightUnitor := fun A =>
{ hom := OmegaMap.fst
  inv :=
    { toFun := fun a => (a, PUnit.unit)
      monotone := fun _ _ h => <h, le_rfl>
      map_?Sup := by
        intro c hc
        apply Prod.ext
        * rfl
        * exact (OmegaComplete.?Sup_const PUnit.unit).symm }
  hom_inv := by
    apply OmegaMap.ext
    intro a
    rfl
  inv_hom := by
    apply OmegaMap.ext
    intro p
    apply Prod.ext
    * rfl
    * exact Subsingleton.elim _ _ }
associator := fun A B C =>
{ hom :=
  { toFun := fun p => (p.1.1, (p.1.2, p.2))
    monotone := fun _ _ h =>
      <h.1.1, h.1.2, h.2>
    map_?Sup := fun _ _ => rfl }
  inv :=
    { toFun := fun p => ((p.1, p.2.1), p.2.2)
      monotone := fun _ _ h =>
        <<h.1, h.2.1>, h.2.2>
      map_?Sup := fun _ _ => rfl }
  hom_inv := by
    apply OmegaMap.ext
    intro p
    rcases p with <a, b, c>
    rfl
  inv_hom := by
    apply OmegaMap.ext
    intro p
    rcases p with <<a, b>, c>
    rfl }
braiding := fun A B =>
{ hom := OmegaMap.pair OmegaMap.snd OmegaMap.fst
  inv := OmegaMap.pair OmegaMap.snd OmegaMap.fst
  hom_inv := by

```



```

    apply OmegaMap.ext
    intro p
    exact Prod.eta _
  inv_hom := by
    apply OmegaMap.ext
    intro p
    exact Prod.eta _ }
eval := OmegaMap.eval
curry := OmegaMap.curry
uncurry := OmegaMap.uncurry
curry_uncurry := OmegaMap.curry_uncurry
uncurry_curry := OmegaMap.uncurry_curry
curry_mono := by
  intro X A B f g h x a
  exact h (x, a)
curry_?Sup := by
  intro X A B c hc
  apply OmegaMap.ext
  intro x
  apply OmegaMap.ext
  intro a
  rfl

```

#### 4.4.73 An ordinary functor between the underlying categories

**Definition.** An ordinary functor between the underlying categories. LNL adjunctions need not preserve the chosen hom orders; enrichment is retained separately on the semantic categories and on functors that genuinely preserve it.

**Construction.** An element consists of `obj`, `map` and `map_comp`, subject to the laws `map_id`.

##### Lean 4 source `QLambda/Domain/PlainFunctor.lean`

```

structure PlainFunctor (C D : OmegaCategory) where
  obj : C.Obj -> D.Obj
  map : {A B : C.Obj} -> C.Hom A B -> D.Hom (obj A) (obj B)
  map_id : forall {A : C.Obj}, map (@C.id A) = D.id
  map_comp :
    forall {A B E : C.Obj} (g : C.Hom B E) (f : C.Hom A B),
      map (C.comp g f) = D.comp (map g) (map f)

```

#### 4.4.74 Product of partial-countable-sum fibers

**Definition.** Product of partial-countable-sum fibers.

**Construction.** Constructed by supplying each component: carrier, zero, summation, uniqueness, empty, singleton, remove zero and reindexing, among others. The accompanying laws are verified from the definitions.

##### Lean 4 source `QLambda/Domain/Presheaf/AdditiveProduct.lean`

```

noncomputable def additiveProductFiber (X Y : Fiber.{u}) : Fiber.{u} where
  Carrier := X.Carrier x Y.Carrier
  zero := (0, 0)

```

```

summation :=
{ HasSum := fun f s =>
  X.HasSum (fun i => (f i).1) s.1 /\
  Y.HasSum (fun i => (f i).2) s.2
unique := by
  intro ? _ f s t hs ht
  apply Prod.ext
  * exact X.summation.unique hs.1 ht.1
  * exact Y.summation.unique hs.2 ht.2
empty := by
  constructor
  * convert X.summation.empty using 1
  * convert Y.summation.empty using 1
singleton := fun s =>
  <X.summation.singleton s.1, Y.summation.singleton s.2>
remove_zero := by
  intro ? _ f a s hz
  constructor
  * intro h
  constructor
  * apply (X.summation.remove_zero
    (fun i => (f i).1) a s.1 ?_).mp h.1
    intro i hi
    exact congrArg Prod.fst (hz i hi)
  * apply (Y.summation.remove_zero
    (fun i => (f i).2) a s.2 ?_).mp h.2
    intro i hi
    exact congrArg Prod.snd (hz i hi)
  * intro h
  constructor
  * apply (X.summation.remove_zero
    (fun i => (f i).1) a s.1 ?_).mpr h.1
    intro i hi
    exact congrArg Prod.fst (hz i hi)
  * apply (Y.summation.remove_zero
    (fun i => (f i).2) a s.2 ?_).mpr h.2
    intro i hi
    exact congrArg Prod.snd (hz i hi)
reindex := by
  intro ? ? _ _ e f s
  constructor <;> intro h
  * exact
    <(X.summation.reindex e (fun i => (f i).1) s.1).mp h.1,
    (Y.summation.reindex e (fun i => (f i).2) s.2).mp h.2>
  * exact
    <(X.summation.reindex e (fun i => (f i).1) s.1).mpr h.1,
    (Y.summation.reindex e (fun i => (f i).2) s.2).mpr h.2>
flatten := by
  intro ? _ ? _ f s
  constructor
  * intro h
  obtain <gx, hgx, hsx> :=
    (X.summation.flatten (fun i j => (f i j).1) s.1).mp h.1
  obtain <gy, hgy, hsy> :=
    (Y.summation.flatten (fun i j => (f i j).2) s.2).mp h.2
  exact

```

```

    <fun i => (gx i, gy i),
      fun i => <hgx i, hgy i>, <hsx, hsy>>
* rintro <g, hg, hs>
exact
  <(X.summation.flatten
    (fun i j => (f i j).1) s.1).mpr
    <fun i => (g i).1, fun i => (hg i).1, hs.1>,
    (Y.summation.flatten
    (fun i j => (f i j).2) s.2).mpr
    <fun i => (g i).2, fun i => (hg i).2, hs.2>> }

```

#### 4.4.75 Pointwise additive product of specialized modules

**Definition.** Pointwise additive product of specialized modules.

**Construction.** Constructed by supplying each component: act, act zero element, act zero functorial action, act identity, act composite, act sum element, act sum functorial action and act sum from one, among others. The accompanying laws are verified from the definitions.

#### Lean 4 source `QLambda/Domain/Presheaf/AdditiveProduct.lean`

```

noncomputable def additiveProduct (M N : Module.{u}) : Module.{u} where
  obj n := additiveProductFiber (M.obj n) (N.obj n)
  act := fun x f => (M.act x.1 f, N.act x.2 f)
  act_zero_element := by
    intro m n f
    exact Prod.ext (M.act_zero_element f) (N.act_zero_element f)
  act_zero_map := by
    intro m n x
    exact Prod.ext (M.act_zero_map x.1) (N.act_zero_map x.2)
  act_id := by
    intro n x
    exact Prod.ext (M.act_id x.1) (N.act_id x.2)
  act_comp := by
    intro l m n x f g
    exact Prod.ext (M.act_comp x.1 f g) (N.act_comp x.2 f g)
  act_sum_element := by
    intro ? _ m n x s f h
    exact <M.act_sum_element f h.1, N.act_sum_element f h.2>
  act_sum_map := by
    intro ? _ m n x f s h
    exact <M.act_sum_map x.1 h, N.act_sum_map x.2 h>
  act_sum_from_one := by
    intro ? _ m x s f h
    obtain <zM, hzM> := M.act_sum_from_one f h.1
    obtain <zN, hzN> := N.act_sum_from_one f h.2
    exact <(zM, zN), <hzM, hzN>>
  act_sum_tensor_from_one := by
    intro ? _ m B x s f h
    obtain <zM, hzM> := M.act_sum_tensor_from_one f h.1
    obtain <zN, hzN> := N.act_sum_tensor_from_one f h.2
    exact <(zM, zN), <hzM, hzN>>

```

#### 4.4.76 First additive projection

**Definition.** First additive projection.

**Construction.** Constructed by supplying each component: application, functorial action zero, functorial action sum and naturality. The accompanying laws are verified from the definitions.

**Lean 4 source** `QLambda/Domain/Presheaf/AdditiveProduct.lean`

```
noncomputable def additiveFst (M N : Module.{u}) :  
  Hom (additiveProduct M N) M where  
  app := fun _ x => x.1  
  map_zero := fun _ => rfl  
  map_sum := fun h => h.1  
  naturality := fun _ _ => rfl
```

#### 4.4.77 Second additive projection

**Definition.** Second additive projection.

**Construction.** Constructed by supplying each component: application, functorial action zero, functorial action sum and naturality. The accompanying laws are verified from the definitions.

**Lean 4 source** `QLambda/Domain/Presheaf/AdditiveProduct.lean`

```
noncomputable def additiveSnd (M N : Module.{u}) :  
  Hom (additiveProduct M N) N where  
  app := fun _ x => x.2  
  map_zero := fun _ => rfl  
  map_sum := fun h => h.2  
  naturality := fun _ _ => rfl
```

#### 4.4.78 Pairing into an additive product

**Definition.** Pairing into an additive product.

**Construction.** Constructed by supplying each component: application, functorial action zero, functorial action sum and naturality. The accompanying laws are verified from the definitions.

**Lean 4 source** `QLambda/Domain/Presheaf/AdditiveProduct.lean`

```
noncomputable def additivePair {L M N : Module.{u}}  
  (f : Hom L M) (g : Hom L N) :  
  Hom L (additiveProduct M N) where  
  app := fun n x => (f.app n x, g.app n x)  
  map_zero := by  
    intro n  
    exact Prod.ext (f.map_zero n) (g.map_zero n)  
  map_sum := fun h => <f.map_sum h, g.map_sum h>  
  naturality := by  
    intro m n x h  
    exact Prod.ext (f.naturality x h) (g.naturality x h)
```

#### 4.4.79 First additive projection of a pair

**Statement.** For superoperator modules  $L, M, N$ , module morphisms  $f, g$ : the composite of the first additive projection of  $M$  and  $N$  after the additive pairing of  $f$  and  $g$  equals  $f$ .

**Proof.** Both sides are compared pointwise (by extensionality).

**Lean 4 source** `QLambda/Domain/Presheaf/AdditiveProduct.lean`

```
theorem additiveFst_pair {L M N : Module.{u}}
  (f : Hom L M) (g : Hom L N) :
  Hom.comp (additiveFst M N) (additivePair f g) = f := by
  ext
  rfl
```

#### 4.4.80 Second additive projection of a pair

**Statement.** For superoperator modules  $L, M, N$ , module morphisms  $f, g$ : the composite of the second additive projection of  $M$  and  $N$  after the additive pairing of  $f$  and  $g$  equals  $g$ .

**Proof.** Both sides are compared pointwise (by extensionality).

**Lean 4 source** `QLambda/Domain/Presheaf/AdditiveProduct.lean`

```
theorem additiveSnd_pair {L M N : Module.{u}}
  (f : Hom L M) (g : Hom L N) :
  Hom.comp (additiveSnd M N) (additivePair f g) = g := by
  ext
  rfl
```

#### 4.4.81 Uniqueness of the additive pairing

**Statement.** For superoperator modules  $L, M, N$ , module morphisms  $f, g$ : if  $\text{Hom } L \text{ (additiveProduct } M \text{ N)}$ ;  $\text{Hom.comp (additiveFst } M \text{ N) } h = f$ ; and  $\text{Hom.comp (additiveSnd } M \text{ N) } h = g$ , then  $h$  equals the additive pairing of  $f$  and  $g$ .

**Proof.** Both sides are compared pointwise (by extensionality). It follows from the extensionality for bilinear maps and congruence of function application.

**Lean 4 source** `QLambda/Domain/Presheaf/AdditiveProduct.lean`

```
theorem additivePair_unique {L M N : Module.{u}}
  (h : Hom L (additiveProduct M N))
  (f : Hom L M) (g : Hom L N)
  (hf : Hom.comp (additiveFst M N) h = f)
  (hg : Hom.comp (additiveSnd M N) h = g) :
  h = additivePair f g := by
  ext n x
  apply Prod.ext
  * exact congrArg (fun k => k.app n x) hf
  * exact congrArg (fun k => k.app n x) hg
```

#### 4.4.82 A CP matrix is admissible precisely when its induced countable family of rank-one module maps has a specified sum

**Definition.** A CP matrix is admissible precisely when its induced countable family of rank-one module maps has a specified sum. Keeping the sum as data avoids hiding a convergence premise behind choice.

**Construction.** An element consists of `entry` and `total`, subject to the laws `hasSum`.

**Lean 4 source** `QLambda/Domain/Presheaf/AdmissibleMatrix.lean`

```
structure AdmissibleMatrix {M N : Module.{u}}
  (bM : PseudoBasis M) (bN : PseudoBasis N) where
  entry :
    forall i j, Hom (bM.coeff i).module (bN.coeff j).module
  total : Hom M N
  hasSum :
    Hom.HasSum (matrixTerm bM bN entry) total
```

#### 4.4.83 Every module map has its canonical admissible matrix

**Definition.** Every module map has its canonical admissible matrix.

**Construction.** Constructed by supplying each component: entry, totality and summability. The accompanying laws are verified from the definitions.

**Lean 4 source** `QLambda/Domain/Presheaf/AdmissibleMatrix.lean`

```
noncomputable def matrixOfHom {M N : Module.{u}}
  (bM : PseudoBasis M) (bN : PseudoBasis N)
  (f : Hom M N) : AdmissibleMatrix bM bN where
  entry := bM.coefficient bN f
  total := f
  hasSum := by
    intro n x
    apply
      (N.obj n).summation.flatten
      (fun i j =>
        (matrixTerm bM bN
          (bM.coefficient bN f) <i, j>).app n x)
      (f.app n x)).mpr
  refine <fun i => f.app n ((bM.ket i).app n ((bM.bra i).app n x)),
    ?_, ?_>
  * intro i
    simp [matrixTerm, coefficient, Hom.comp_app] using
      bN.resolves n
      (f.app n ((bM.ket i).app n ((bM.bra i).app n x)))
  * exact f.map_sum (bM.resolves n x)
```

#### 4.4.84 Totality of the matrix of morphism

**Statement.** For superoperator modules  $M, N$ , a module morphism  $f$ :  $(\text{matrixOfHom } bM \ bN \ f) . \text{total} = f$ .

**Proof.** By definition: the left-hand side,  $(\text{matrixOfHom } bM \ bN \ f) . \text{total}$ , and the right-hand side,  $f$ , unfold to the same term.

#### Lean 4 source `QLambda/Domain/Presheaf/AdmissibleMatrix.lean`

```
theorem matrixOfHom_total {M N : Module.{u}}
  (bM : PseudoBasis M) (bN : PseudoBasis N) (f : Hom M N) :
  (matrixOfHom bM bN f).total = f :=
  rfl
```

#### 4.4.85 Identity matrix, represented canonically by the identity module map

**Definition.** Identity matrix, represented canonically by the identity module map.

**Construction.** Defined to be the matrix of morphism of  $bM$ ,  $bM$ , the identity of  $M$ .

#### Lean 4 source `QLambda/Domain/Presheaf/AdmissibleMatrix.lean`

```
noncomputable def AdmissibleMatrix.identity {M : Module.{u}}
  (bM : PseudoBasis M) : AdmissibleMatrix bM bM :=
  matrixOfHom bM bM (Hom.id M)
```

#### 4.4.86 Composition of admissible matrices

**Definition.** Composition of admissible matrices. Canonicalization through the total module maps is essential: for generalized bases, an arbitrary displayed matrix is not unique even when its induced morphism is.

**Construction.** Defined to be the matrix of morphism of  $bL$ ,  $bN$ , the composite of  $g$ .total after  $f$ .total.

#### Lean 4 source `QLambda/Domain/Presheaf/AdmissibleMatrix.lean`

```
noncomputable def AdmissibleMatrix.comp
  {L M N : Module.{u}}
  {bL : PseudoBasis L} {bM : PseudoBasis M}
  {bN : PseudoBasis N}
  (g : AdmissibleMatrix bM bN)
  (f : AdmissibleMatrix bL bM) :
  AdmissibleMatrix bL bN :=
  matrixOfHom bL bN (Hom.comp g.total f.total)
```

#### 4.4.87 Totality of the composition

**Statement.** For superoperator modules  $L, M, N$ :  $(g.comp f).total$  equals the composite of the totality of  $g$  after the totality of  $f$ .

**Proof.** By definition: the left-hand side,  $(g.comp f).total$ , and the right-hand side, the composite of the totality of  $g$  after the totality of  $f$ , unfold to the same term.

#### Lean 4 source `QLambda/Domain/Presheaf/AdmissibleMatrix.lean`

```
theorem AdmissibleMatrix.comp_total
  {L M N : Module.{u}}
  {bL : PseudoBasis L} {bM : PseudoBasis M}
  {bN : PseudoBasis N}
```

```

(g : AdmissibleMatrix bM bN)
(f : AdmissibleMatrix bL bM) :
(g.comp f).total = Hom.comp g.total f.total :=
rfl

```

#### 4.4.88 Identity of a composite for admissible matrices

**Statement.** For superoperator modules  $M, N$ :  $((\text{AdmissibleMatrix.identity } bN).comp f).total$  equals the totality of  $f$ .

**Proof.** The goal is simplified using the definition of the composition and the definition of the identity.

##### Lean 4 source `QLambda/Domain/Presheaf/AdmissibleMatrix.lean`

```

theorem AdmissibleMatrix.identity_comp
  {M N : Module.{u}} {bM : PseudoBasis M} {bN : PseudoBasis N}
  (f : AdmissibleMatrix bM bN) :
  ((AdmissibleMatrix.identity bN).comp f).total = f.total := by
simp [AdmissibleMatrix.comp, AdmissibleMatrix.identity]

```

#### 4.4.89 Composition of the identity for admissible matrices

**Statement.** For superoperator modules  $M, N$ :  $(f.comp (\text{AdmissibleMatrix.identity } bM)).total$  equals the totality of  $f$ .

**Proof.** The goal is simplified using the definition of the composition and the definition of the identity.

##### Lean 4 source `QLambda/Domain/Presheaf/AdmissibleMatrix.lean`

```

theorem AdmissibleMatrix.comp_identity
  {M N : Module.{u}} {bM : PseudoBasis M} {bN : PseudoBasis N}
  (f : AdmissibleMatrix bM bN) :
  (f.comp (AdmissibleMatrix.identity bM)).total = f.total := by
simp [AdmissibleMatrix.comp, AdmissibleMatrix.identity]

```

#### 4.4.90 Composition for admissible matrices is associative

**Statement.** For superoperator modules  $K, L, M, N$ : if  $\text{AdmissibleMatrix } bM \ bN$ , then  $((h.comp g).comp f).total = (h.comp (g.comp f)).total$ .

**Proof.** The goal is simplified using the definition of the composition and the fact that composition for module morphisms is associative.

##### Lean 4 source `QLambda/Domain/Presheaf/AdmissibleMatrix.lean`

```

theorem AdmissibleMatrix.comp_assoc
  {K L M N : Module.{u}}
  {bK : PseudoBasis K} {bL : PseudoBasis L}
  {bM : PseudoBasis M} {bN : PseudoBasis N}
  (h : AdmissibleMatrix bM bN)
  (g : AdmissibleMatrix bL bM)
  (f : AdmissibleMatrix bK bL) :
  ((h.comp g).comp f).total = (h.comp (g.comp f)).total := by
simp [AdmissibleMatrix.comp, Hom.comp_assoc]

```



#### 4.4.91 Mixed-degree Day summability of homogeneous split components, relative to ambient-CP bilinear targets only

**Definition.** Mixed-degree Day summability of homogeneous split components, relative to ambient-CP bilinear targets only.

**Construction.** Defined by an explicit formula built from the exponential modality, the superoperator module, the ambient CP superoperator module and the bilinear map.

**Lean 4 source** `QLambda/Domain/Presheaf/AmbientCPBangAdmissible.lean`

```
def BangComultAmbientCPAdmissible (A : Nat) : Prop :=
  forall (n : Nat) (x : ((bang A).obj n).Carrier)
    (L : Module) [AmbientCPModule L]
    (b : Bilinear (bang A) (bang A) L),
    exists z : (L.obj n).Carrier,
      (L.obj n).HasSum
        (fun pq : Nat x Nat =>
          DayCoend.evaluate L b
            (bangComultComponentFamily A n x pq))
        z
```

#### 4.4.92 Absolute Day admissibility implies the ambient-CP restriction

**Statement.** Absolute Day admissibility implies the ambient-CP restriction. Formally: `BangComult AmbientCPAdmissible A`.

**Proof.** It follows from the hypothesis that `BangComultComponentsAdmissible A`.

**Lean 4 source** `QLambda/Domain/Presheaf/AmbientCPBangAdmissible.lean`

```
theorem bangComultAmbientCPAdmissible_of_components (A : Nat)
  (h : BangComultComponentsAdmissible A) :
  BangComultAmbientCPAdmissible A := by
  intro n x L _ b
  exact h n x L b
```

#### 4.4.93 Exponential comultiplication ambient CP admissibility of zero

**Statement.** `BangComultAmbientCPAdmissible 0`. Formally: `BangComultAmbientCPAdmissible 0`.

**Proof.** This is an instance of the absolute Day admissibility implies the ambient-CP restriction, applied to the fact that mixed-partition admissibility holds for  $A = 0$ .

**Lean 4 source** `QLambda/Domain/Presheaf/AmbientCPBangAdmissible.lean`

```
theorem bangComultAmbientCPAdmissible_zero :
  BangComultAmbientCPAdmissible 0 :=
  bangComultAmbientCPAdmissible_of_components 0
  bangComultComponentsAdmissible_zero
```

#### 4.4.94 Exponential comultiplication ambient CP admissibility of one

**Statement.** `BangComultAmbientCPAdmissible 1`. Formally: `BangComultAmbientCPAdmissible 1`.

**Proof.** This is an instance of the absolute Day admissibility implies the ambient-CP restriction, applied to the mixed-partition admissibility for  $A = 1$ .

**Lean 4 source** `QLambda/Domain/Presheaf/AmbientCPBangAdmissible.lean`

```
theorem bangComultAmbientCPAdmissible_one :
  BangComultAmbientCPAdmissible 1 :=
  bangComultAmbientCPAdmissible_of_components 1
  bangComultComponentsAdmissible_one
```

#### 4.4.95 Exponential comultiplication ambient CP admissibility, when it is at most one

**Statement.** For a natural number  $A$ : if  $A \leq 1$ , then `BangComultAmbientCPAdmissible A`.

**Proof.** It follows from the exponential comultiplication ambient CP admissibility of zero and the exponential comultiplication ambient CP admissibility of one.

**Lean 4 source** `QLambda/Domain/Presheaf/AmbientCPBangAdmissible.lean`

```
theorem bangComultAmbientCPAdmissible_of_le_one (A : Nat) (hA : A <= 1) :
  BangComultAmbientCPAdmissible A := by
  interval_cases A
  * exact bangComultAmbientCPAdmissible_zero
  * exact bangComultAmbientCPAdmissible_one
```

#### 4.4.96 Per-degree ambient-CP row: finite partitions of a fixed total degree

**Definition.** Per-degree ambient-CP row: finite partitions of a fixed total degree.

**Construction.** Defined by an explicit formula built from the exponential modality, the superoperator module, the ambient CP superoperator module and the bilinear map.

**Lean 4 source** `QLambda/Domain/Presheaf/AmbientCPBangAdmissible.lean`

```
def BangComultAmbientCPDegreeRowAdmissible (A : Nat) : Prop :=
  forall (n k : Nat) (x : ((bang A).obj n).Carrier)
    (L : Module) [AmbientCPModule L]
    (b : Bilinear (bang A) (bang A) L),
    exists z : (L.obj n).Carrier,
      (L.obj n).HasSum
      (fun part : DegreePartition k =>
        DayCoend.evaluate L b
          (bangComultComponentFamily A n x
            (degreePartitionToPair k part)))
      z
```

#### 4.4.97 Product of Yoneda unit fibers equals the degree-k tensor-power dimension

**Statement.** Product of Yoneda unit fibers equals the degree-k tensor-power dimension. Formally:  
 $\text{tensorPowerDimension } A \text{ part.val} * \text{tensorPowerDimension } A (k - \text{part.val}) = \text{tensorPowerDimension } A k.$

**Proof.** The key step rewrites with the fact that the dimension of a tensor power equals a power and the usual algebraic identities.

**Lean 4 source** `QLambda/Domain/Presheaf/AmbientCPBangAdmissible.lean`

```
theorem tensorPowerDimension_mul_partition (A k : Nat)
  (part : DegreePartition k) :
  tensorPowerDimension A part.val *
    tensorPowerDimension A (k - part.val) =
    tensorPowerDimension A k := by
  have hpq : part.val + (k - part.val) = k :=
    Nat.add_sub_of_le (Nat.le_of_lt_succ part.isLt)
  rw [tensorPowerDimension_eq_pow, tensorPowerDimension_eq_pow,
    tensorPowerDimension_eq_pow, <- pow_add, hpq]
```

#### 4.4.98 Cast a bilinear generator along $A^p * A^q = A^k$

**Definition.** Cast a bilinear generator along  $A^p * A^q = A^k$ .

**Construction.** Defined by an explicit formula built from the tensor product power dimension multiplication partition, the congruence argument and the exponential degree unit.

**Lean 4 source** `QLambda/Domain/Presheaf/AmbientCPBangAdmissible.lean`

```
noncomputable def bangAmbientCPRowGenerator (A k n : Nat)
  (part : DegreePartition k) (_x : ((bang A).obj n).Carrier)
  (L : Module) (b : Bilinear (bang A) (bang A) L) :
  (L.obj (tensorPowerDimension A k)).Carrier :=
  let p := part.val
  let q := k - part.val
  let hdim := tensorPowerDimension_mul_partition A k part
  (congrArg (fun m => (L.obj m).Carrier) hdim) |>
    b.app (bangDegreeUnit A p) (bangDegreeUnit A q)
```

#### 4.4.99 Cast a bang split along $A^p * A^q = A^k$

**Definition.** Cast a bang split along  $A^p * A^q = A^k$ .

**Construction.** Defined by an explicit formula built from the tensor product power dimension multiplication partition, the congruence argument, the superoperator and the exponential split component.

**Lean 4 source** `QLambda/Domain/Presheaf/AmbientCPBangAdmissible.lean`

```
noncomputable def bangAmbientCPRowSplit (A k n : Nat)
  (part : DegreePartition k) (x : ((bang A).obj n).Carrier) :
  Superoperator n (tensorPowerDimension A k) :=
  let p := part.val
  let q := k - part.val
  let hdim := tensorPowerDimension_mul_partition A k part
```

```
(congrArg (Superoperator n) hdim) |>
  (bangSplitComponent A p q).app n x
```

#### 4.4.100 Action is invariant under casting the intermediate fiber dimension

**Statement.** Action is invariant under casting the intermediate fiber dimension. Formally:  $L.act ((congrArg (fun m => (L.obj m).Carrier) h) \triangleright x) ((congrArg (Superoperator n) h) \triangleright f) = L.act x f$ .

**Proof.** By case analysis on the derivation that  $a = b$ .

#### Lean 4 source `QLambda/Domain/Presheaf/AmbientCPBangAdmissible.lean`

```
theorem Module.act_congrArg_dim {L : Module} {n a b : Nat} (h : a = b)
  (x : (L.obj a).Carrier) (f : Superoperator n a) :
  L.act ((congrArg (fun m => (L.obj m).Carrier) h) |> x)
    ((congrArg (Superoperator n) h) |> f) =
  L.act x f := by
  cases h
  rfl
```

#### 4.4.101 Exponential comultiplication component of the evaluation of the partition

**Statement.** For natural numbers  $A, k, n$ , a superoperator module  $L$ : an explicit expression in the evaluation and the exponential comultiplication component equals the act of `bangAmbientCPRowGenerator A k n part x L  $\beta$`  and `bangAmbientCPRowSplit A k n part x`.

**Proof.** It follows from the transitivity for semantic equalities of circuits and the fact that action is invariant under casting the intermediate fiber dimension.

#### Lean 4 source `QLambda/Domain/Presheaf/AmbientCPBangAdmissible.lean`

```
theorem bangComultComponent_evaluate_partition (A k n : Nat)
  (part : DegreePartition k) (x : ((bang A).obj n).Carrier)
  (L : Module) (b : Bilinear (bang A) (bang A) L) :
  DayCoend.evaluate L b
    ((bangComultComponent A part.val (k - part.val)).app n x) =
  L.act (bangAmbientCPRowGenerator A k n part x L b)
    (bangAmbientCPRowSplit A k n part x) := by
  have he :=
    bangComultComponent_evaluate A part.val (k - part.val) n x L b
  refine Eq.trans he ?_
  symm
  exact Module.act_congrArg_dim
    (tensorPowerDimension_mul_partition A k part)
    (b.app (bangDegreeUnit A part.val) (bangDegreeUnit A (k - part.val)))
    ((bangSplitComponent A part.val (k - part.val)).app n x)
```

#### 4.4.102 Ambient-CP modules admit every fixed-degree bang-comult row

**Statement.** Ambient-CP modules admit every fixed-degree bang-comult row. Formally: `BangComult AmbientCPDegreeRowAdmissible A`.

**Proof.** Both sides are compared pointwise (by extensionality). Each component of the claim is established separately. The hypotheses are unpacked into their constituent data. The goal is simplified using the definition of the  $r$ .

#### Lean 4 source `QLambda/Domain/Presheaf/AmbientCPBangAdmissible.lean`

```
theorem bangComultAmbientCP_degree_row_hasSum (A : Nat) :
  BangComultAmbientCPDegreeRowAdmissible A := by
  intro n k x L hL b
  let d := tensorPowerDimension A k
  let R : DegreePartition k -> (L.obj d).Carrier := fun part =>
    bangAmbientCPRowGenerator A k n part x L b
  obtain <Rsum, hR> :=
    Fiber.hasSum_fintype (L.obj d) (hL.has_sum_add d) R
  let f : DegreePartition k -> Superoperator n d := fun part =>
    bangAmbientCPRowSplit A k n part x
  obtain <z, hz> :=
    hL.has_act_sum_from_dim.act_sum_from_dim (m := n) (d := d) (x := R)
    (s := Rsum) f hR
  refine <z, ?_>
  have hfam :
    (fun part : DegreePartition k =>
      DayCoend.evaluate L b
        (bangComultComponentFamily A n x
          (degreePartitionToPair k part))) =
      fun part => L.act (R part) (f part) := by
    funext part
    change
      DayCoend.evaluate L b
        ((bangComultComponent A part.val (k - part.val)).app n x) =
        L.act (R part) (f part)
    simpa [R, f] using
      bangComultComponent_evaluate_partition A k n part x L b
  exact hfam |> hz
```

#### 4.4.103 Exponential comultiplication ambient CP of the degree of the row of the admissibility of the two

**Statement.** `BangComultAmbientCPDegreeRowAdmissible 2`. Formally: `BangComultAmbientCPDegreeRowAdmissible 2`.

**Proof.** This is an instance of the ambient-CP modules admit every fixed-degree bang-comult row.

#### Lean 4 source `QLambda/Domain/Presheaf/AmbientCPBangAdmissible.lean`

```
theorem bangComultAmbientCP_degree_row_admissible_two :
  BangComultAmbientCPDegreeRowAdmissible 2 :=
  bangComultAmbientCP_degree_row_hasSum 2

/--! ## Common-fiber rectangle residual (row -> `Nat x Nat` glue) -/
```

#### 4.4.104 A=1-style common-fiber rectangle residual: a single dimension $d$ hosts every Yoneda-unit generator fiber $A^p * A^q$

**Definition.** A=1-style common-fiber rectangle residual: a single dimension  $d$  hosts every Yoneda-unit generator fiber  $A^p * A^q$ . At  $A = 1$  this holds with  $d = 1$  and the rectangle sum is `bangOne_degreeUnit_rectangle_hasSum`. Ambient-CP degree rows live at intermediate fibers  $A^k$ ; gluing them by the A=1 rectangle pattern requires this alignment.

**Construction.** Defined to be the product of  $\exists d : \mathbb{N}, \forall p q : \mathbb{N}, \text{tensorPowerDimension } A^p * \text{tensorPowerDimension } A^q = d$ .

**Lean 4 source** `QLambda/Domain/Presheaf/AmbientCPBangAdmissible.lean`

```
def BangDegreeUnitRectangleHasSum (A : Nat) : Prop :=
  exists d : Nat, forall p q : Nat,
    tensorPowerDimension A p * tensorPowerDimension A q = d
```

#### 4.4.105 Exponential degree unit rectangle has sum of one

**Statement.** `BangDegreeUnitRectangleHasSum 1`. Formally: `BangDegreeUnitRectangleHasSum 1`.

**Proof.** The witness is assembled directly from its components, using the fact that the dimension of a tensor power equals a power and the usual algebraic identities.

**Lean 4 source** `QLambda/Domain/Presheaf/AmbientCPBangAdmissible.lean`

```
theorem bangDegreeUnitRectangleHasSum_one :
  BangDegreeUnitRectangleHasSum 1 :=
  <1, fun p q => by
    simp [tensorPowerDimension_eq_pow, one_pow]>
```

#### 4.4.106 Precise no-go: at $A = 2$ the generator fibers are not constant ( $2^0 * 2^0 = 1 \neq 2 = 2^1 * 2^0$ )

**Statement.** Precise no-go: at  $A = 2$  the generator fibers are not constant ( $2^0 * 2^0 = 1 \neq 2 = 2^1 * 2^0$ ), so the A=1 common-fiber rectangle pattern cannot typecheck, let alone sum. Formally:  $\neg \text{BangDegreeUnitRectangleHasSum } 2$ .

**Proof.** The goal is simplified using the fact that the dimension of a tensor power equals a power and the usual algebraic identities. The claim is decidable and is checked by exhaustive evaluation.

**Lean 4 source** `QLambda/Domain/Presheaf/AmbientCPBangAdmissible.lean`

```
theorem not_bangDegreeUnitRectangleHasSum_two :
  not BangDegreeUnitRectangleHasSum 2 := by
  rintro <d, hd>
  have h00 := hd 0 0
  have h10 := hd 1 0
  simp only [tensorPowerDimension_eq_pow, pow_zero, pow_one, mul_one] at h00 h10
  exact (one_ne_two (h00.trans h10.symm))
where
  one_ne_two : (1 : Nat) != 2 := by decide
```

#### 4.4.107 Glue residual at $A = 2$ : ambient-CP degree rows are available

**Statement.** Glue residual at  $A = 2$ : ambient-CP degree rows are available, but the named common-fiber rectangle obligation fails, so  $A=1$ -style  $\text{row} \rightarrow \mathbb{N} \times \mathbb{N}$  glue is blocked. Full `BangComultAmbientCPAdmissible 2` is not claimed (no alternative glue constructed). Formally: `BangComultAmbientCPDegreeRowAdmissible 2  $\wedge$   $\neg$  BangDegreeUnitRectangleHasSum 2`.

**Proof.** The witness is assembled directly from its components, using the exponential comultiplication ambient CP of the degree of the row of the admissibility of the two.

**Lean 4 source** `QLambda/Domain/Presheaf/AmbientCPBangAdmissible.lean`

```
theorem bangComultAmbientCPAdmissible_two_glue_residual :
  BangComultAmbientCPDegreeRowAdmissible 2 /\
    not BangDegreeUnitRectangleHasSum 2 :=
  <bangComultAmbientCP_degree_row_admissible_two,
    not_bangDegreeUnitRectangleHasSum_two>
```

#### 4.4.108 Absolute Day admissibility at $A = 2$ is not obtained from ambient-CP relative data

**Statement.** Absolute Day admissibility at  $A = 2$  is not obtained from ambient-CP relative data: absolute quantifies over every module target, including non-`HasSumAdd` fibers that can host a Day-transfer witness.

**Proof.** The witness is assembled directly from its components, using a Day-transfer witness isolates an inadmissible two-term row of the full component family.

**Lean 4 source** `QLambda/Domain/Presheaf/AmbientCPBangAdmissible.lean`

```
theorem day_bang_l9_absolute_bangComult_two_not_claimed :
  (BangComultDayTransferWitness ->
    not BangComultComponentsAdmissible 2) /\
    (forall A, BangComultComponentsAdmissible A ->
      BangComultAmbientCPAdmissible A) :=
  <bangComultDayTransferWitness_not_admissible,
    bangComultAmbientCPAdmissible_of_components>
```

#### 4.4.109 Ambient-CP relative packaging of a Day comonoid

**Definition.** Ambient-CP relative packaging of a Day comonoid. `AmbientCPModule` constrains bilinear *targets*, not the comonoid carrier; this wrapper lifts absolute `bangComonoid` into the L9 relative interface.

**Construction.** An element consists of `carrier` and `toComonoid`, subject to the laws `carrier_eq`.

**Lean 4 source** `QLambda/Domain/Presheaf/AmbientCPComonoid.lean`

```
structure AmbientCPComonoid where
  carrier : Module
  toComonoid : Comonoid
  carrier_eq : toComonoid.carrier = carrier
```

#### 4.4.110 Absolute bang comonoid for $A \leq 1$ , packaged as ambient CP comonoid

**Definition.** Absolute bang comonoid for  $A \leq 1$ , packaged as `AmbientCPComonoid`.

**Construction.** Constructed by supplying each component: carrier, passage to comonoid and carrier equality. The accompanying laws are verified from the definitions.

**Lean 4 source** `QLambda/Domain/Presheaf/AmbientCPComonoid.lean`

```
noncomputable def ambientCPBangComonoid (A : Nat) (hA : A ≤ 1) :  
  AmbientCPComonoid where  
  carrier := bang A  
  toComonoid := bangComonoid A hA  
  carrier_eq := rfl
```

#### 4.4.111 Ambient CP exponential comonoid, when it is at most one

**Statement.** For a natural number  $A$ : if  $A \leq 1$ , then `AmbientCPComonoid` is inhabited.

**Proof.** The witness is assembled directly from its components, using the definition of the ambient CP exponential comonoid.

**Lean 4 source** `QLambda/Domain/Presheaf/AmbientCPComonoid.lean`

```
theorem ambientCPBangComonoid_of_le_one (A : Nat) (hA : A ≤ 1) :  
  Nonempty AmbientCPComonoid :=  
  <ambientCPBangComonoid A hA>
```

#### 4.4.112 Low-dimensional absolute bang comonoids remain available

**Statement.** Low-dimensional absolute bang comonoids remain available. Formally: `Nonempty Comonoid`.

**Proof.** The witness is assembled directly from its components, using the definition of the exponential comonoid.

**Lean 4 source** `QLambda/Domain/Presheaf/AmbientCPComonoid.lean`

```
theorem bangComonoid_nonempty_of_le_one (A : Nat) (hA : A ≤ 1) :  
  Nonempty Comonoid :=  
  <bangComonoid A hA>
```

#### 4.4.113 L9 positive packaging: ambient-CP relative comonoids for every $A \leq 1$

**Statement.** L9 positive packaging: ambient-CP relative comonoids for every  $A \leq 1$ . Formally:  $(\forall A \leq 1, \text{Nonempty AmbientCPComonoid}) \wedge \text{BangComultAmbientCPAdmissible } 0 \wedge \text{BangComultAmbientCPAdmissible } 1$ .

**Proof.** The witness is assembled directly from its components, using the fact that ambient CP exponential comonoid, when it is at most one.

**Lean 4 source** `QLambda/Domain/Presheaf/AmbientCPComonoid.lean`



```

theorem day_bang_l9_ambientCP_comonoid_le_one :
  (forall A <= 1, Nonempty AmbientCPComonoid) /\
    BangComultAmbientCPAdmissible 0 /\
    BangComultAmbientCPAdmissible 1 :=
  <ambientCPBangComonoid_of_le_one,
    bangComultAmbientCPAdmissible_zero,
    bangComultAmbientCPAdmissible_one>

```

#### 4.4.114 L9 row-glue status: degree-row gate at 2

**Statement.** L9 row-glue status: degree-row gate at 2, precise rectangle no-go at 2,  $A \leq 1$  AmbientCP comonoids, absolute  $A=2$  not claimed. Glued BangComultAmbientCPAdmissible 2 remains deferred (alternative glue not constructed).

**Proof.** The witness is assembled directly from its components, using the exponential comultiplication ambient CP of the degree of the row of the admissibility of the two.

#### Lean 4 source `QLambda/Domain/Presheaf/AmbientCPComonoid.lean`

```

theorem day_bang_l9_ambientCP_row_glue_deferred :
  BangComultAmbientCPDegreeRowAdmissible 2 /\
  not BangDegreeUnitRectangleHasSum 2 /\
  (forall A <= 1, Nonempty AmbientCPComonoid) /\
  ((BangComultDayTransferWitness ->
    not BangComultComponentsAdmissible 2) /\
    (forall A, BangComultComponentsAdmissible A ->
      BangComultAmbientCPAdmissible A)) :=
  <bangComultAmbientCP_degree_row_admissible_two,
    not_bangDegreeUnitRectangleHasSum_two,
    ambientCPBangComonoid_of_le_one,
    day_bang_l9_absolute_bangComult_two_not_claimed>

```

#### 4.4.115 Gate-8 acceptance suite for ambient CP Day exponential category

**Definition.** Gate-8 acceptance suite for AmbientCPDayBangCategory.

**Construction.** An element consists of category, transfer\_needs\_nonadditive, cpm\_pair\_summable, raw\_bound\_still\_fails and transfer\_implies\_inadmissible, subject to the laws le\_one\_components\_ok.

#### Lean 4 source `QLambda/Domain/Presheaf/AmbientCPGate8TestSuite.lean`

```

structure AmbientCPGate8TestSuite : Prop where
  category : AmbientCPDayBangCategory
  transfer_needs_nonadditive :
    BangComultDayTransferWitness ->
      exists L : Module.{0},
        not Fiber.HasSumAdd (L.obj (tensorPowerDimension 2 1))
  cpm_pair_summable :
    forall (B : Nat)
      (z_0_1 z_1_0 :
        ((cpmModule B).obj (tensorPowerDimension 2 1)).Carrier),
      exists ? :
        ((cpmModule B).obj (tensorPowerDimension 2 1)).Carrier,

```

```

      ((cpmModule B).obj (tensorPowerDimension 2 1)).HasSum
      (fun i : Bool => bif i then z_0_1 else z_1_0) ?
raw_bound_still_fails : not BangSplitEffectAdmissible 2
le_one_components_ok :
  BangComultComponentsAdmissible 0 /\ BangComultComponentsAdmissible 1
transfer_implies_inadmissible :
  BangComultDayTransferWitness -> not BangComultComponentsAdmissible 2

```

#### 4.4.116 Ambient CP of the gate 8 of the test suite

**Statement.** AmbientCPGate8TestSuite. Formally: AmbientCPGate8TestSuite.

**Proof.** The claim follows from the definitions of the objects involved.

**Lean 4 source** [QLambda/Domain/Presheaf/AmbientCPGate8TestSuite.lean](#)

```

theorem ambientCP_gate8_testSuite : AmbientCPGate8TestSuite where
category := ambientCPDayBangCategory
transfer_needs_nonadditive :=
  bangComultDayTransferWitness_requires_nonadditive_target
cpm_pair_summable := cpm_target_cannot_supply_day_transfer_pair
raw_bound_still_fails := day_bang_raw_global_bound_fails_at_two
le_one_components_ok := day_bang_components_ok_zero_one
transfer_implies_inadmissible :=
  bangComultDayTransferWitness_not_admissible

```

#### 4.4.117 L8 terminal theorem: architecture boundary plus ambient-CP Gate-8 suite

**Statement.** L8 terminal theorem: architecture boundary plus ambient-CP Gate-8 suite.

**Proof.** The witness is assembled directly from its components, using the Day exponential modality architecture boundary.

**Lean 4 source** [QLambda/Domain/Presheaf/AmbientCPGate8TestSuite.lean](#)

```

theorem day_bang_l8_resolved_by_ambientCP_replacement :
  DayBangArchitectureBoundary /\
  AmbientCPGate8TestSuite /\
  (BangComultDayTransferWitness ->
    not BangComultComponentsAdmissible 2) :=
<day_bang_architecture_boundary,
  ambientCP_gate8_testSuite,
  bangComultDayTransferWitness_not_admissible>

```

#### 4.4.118 Fiber class restored by the L8 ambient-CP replacement: Bool-additive fibers and joint action at every dimension

**Definition.** Fiber class restored by the L8 ambient-CP replacement: Bool-additive fibers and joint action at every dimension.

**Construction.** A type belongs to the class when it supplies the listed operations and laws.

**Lean 4 source** [QLambda/Domain/Presheaf/AmbientCPModule.lean](#)

```
class AmbientCPModule (M : Module.{0}) : Prop where
  has_sum_add : forall n, Fiber.HasSumAdd (M.obj n)
  has_act_sum_from_dim : HasActSumFromDim M
```

#### 4.4.119 A countable dual basis

**Definition.** A countable dual basis. Coefficients are themselves concrete specialized modules, and the resolution equation uses the pointwise partial-sum relation on natural transformations.

**Construction.** An element consists of `Index`, `countableIndex`, `coeff`, `ket` and `bra`, subject to the laws `resolves`.

##### Lean 4 source `QLambda/Domain/Presheaf/Basis.lean`

```
structure Basis (M : Module.{u}) where
  Index : Type
  countableIndex : Countable Index
  coeff : Index -> Module.{u}
  ket : forall i, Hom (coeff i) M
  bra : forall i, Hom M (coeff i)
  resolves :
    Hom.HasSum
      (fun i : Index => Hom.comp (ket i) (bra i))
      (Hom.id M)
```

#### 4.4.120 Every representable has the one-element identity basis

**Definition.** Every representable has the one-element identity basis.

**Construction.** Constructed by supplying each component: `index`, `countable index`, `coefficient`, `ket`, `bra` and `resolves`. The accompanying laws are verified from the definitions.

##### Lean 4 source `QLambda/Domain/Presheaf/Basis.lean`

```
noncomputable def representableBasis (A : Nat) : Basis (representable A) where
  Index := PUnit
  countableIndex := inferInstance
  coeff := fun _ => representable A
  ket := fun _ => Hom.id _
  bra := fun _ => Hom.id _
  resolves := by
    have h :
      Hom.HasSum
        (fun _ : PUnit => Hom.id (representable A))
        (Hom.id (representable A)) :=
      Hom.hasSum_singleton _
    simpa using h
```

#### 4.4.121 Matrix coefficient of a map relative to two chosen bases

**Definition.** Matrix coefficient of a map relative to two chosen bases.

**Construction.** Defined to be the composite of the `bra` of `j` after the composite of `f` after `bM.ket i`.

#### Lean 4 source `QLambda/Domain/Presheaf/Basis.lean`

```
def Basis.coefficient {M : Module.{u}} {N : Module.{u}}
  (bM : Basis M) (bN : Basis N)
  (f : Hom M N) (i : bM.Index) (j : bN.Index) :
  Hom (bM.coeff i) (bN.coeff j) :=
  Hom.comp (bN.bra j) (Hom.comp f (bM.ket i))
```

#### 4.4.122 Coefficient of the identity for bases

**Statement.** For a superoperator module  $M$ :  $b.coefficient\ b\ (Hom.id\ M)\ i\ j$  equals the composite of the bra of  $j$  after the ket of  $i$ .

**Proof.** Both sides are compared pointwise (by extensionality).

#### Lean 4 source `QLambda/Domain/Presheaf/Basis.lean`

```
theorem Basis.coefficient_id {M : Module.{u}} (b : Basis M)
  (i j) :
  b.coefficient b (Hom.id M) i j =
  Hom.comp (b.bra j) (b.ket i) := by
  ext n x
  rfl
```

#### 4.4.123 Coefficients respect composition before summing over the intermediate basis

**Statement.** Coefficients respect composition before summing over the intermediate basis. This equation is the concrete algebraic part of matrix composition; existence of the intermediate countable sum is a separate convergence obligation. Formally:  $bL.coefficient\ bN\ (Hom.comp\ g\ f)\ i\ j = Hom.comp\ (bN.bra\ j)\ (Hom.comp\ g\ (Hom.comp\ f\ (bL.ket\ i)))$ .

**Proof.** Both sides are compared pointwise (by extensionality).

#### Lean 4 source `QLambda/Domain/Presheaf/Basis.lean`

```
theorem Basis.coefficient_comp {L M N : Module.{u}}
  (bL : Basis L) (_bM : Basis M)
  (bN : Basis N) (g : Hom M N) (f : Hom L M)
  (i : bL.Index) (j : bN.Index) :
  bL.coefficient bN (Hom.comp g f) i j =
  Hom.comp (bN.bra j)
    (Hom.comp g (Hom.comp f (bL.ket i))) := by
  ext n x
  rfl
```

#### 4.4.124 Representable module of the coefficient

**Statement.** For natural numbers  $A, B$ , a superoperator  $f$ : an explicit expression in the representable basis, the Yoneda image and the unit equals the Yoneda image of  $f$ .

**Proof.** Both sides are compared pointwise (by extensionality).

#### Lean 4 source `QLambda/Domain/Presheaf/Basis.lean`

```

theorem representable_coefficient {A B : Nat}
  (f : Superoperator A B) :
  (representableBasis A).coefficient (representableBasis B)
    (yonedaMap f) PUnit.unit PUnit.unit =
  yonedaMap f := by
  ext n x
  rfl

```

#### 4.4.125 A specialized module together with an exhibited generalized countable basis

**Definition.** A specialized module together with an exhibited generalized countable basis. This data is useful for coefficient calculations but is not by itself a generated-subcategory predicate.

**Construction.** An element consists of module and basis.

**Lean 4 source** [QLambda/Domain/Presheaf/BasisGenerated.lean](#)

```

structure BasisGenerated where
  module : Module.{u}
  basis : Basis module

```

#### 4.4.126 A representable as a basis-generated object

**Definition.** A representable as a basis-generated object.

**Construction.** Constructed by supplying each component: module and basis. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/Presheaf/BasisGenerated.lean](#)

```

noncomputable def generatedRepresentable (A : Nat) :
  BasisGenerated.{0} where
  module := representable A
  basis := representableBasis A

```

#### 4.4.127 A bilinear, action-preserving map of specialized modules

**Definition.** A bilinear, action-preserving map of specialized modules.

**Construction.** An element consists of `app`, `map_sum_left`, `map_sum_right` and `naturality`, subject to the laws `map_zero_left` and `map_zero_right`.

**Lean 4 source** [QLambda/Domain/Presheaf/Bilinear.lean](#)

```

structure Bilinear (M : Module.{u}) (N : Module.{v}) (L : Module.{w}) where
  app :
    {m n : Nat} ->
      (M.obj m).Carrier -> (N.obj n).Carrier -> (L.obj (m * n)).Carrier
  map_zero_left :
    forall {m n} (y : (N.obj n).Carrier), app (0 : (M.obj m).Carrier) y = 0
  map_zero_right :
    forall {m n} (x : (M.obj m).Carrier), app x (0 : (N.obj n).Carrier) = 0
  map_sum_left :

```

```

forall {? : Type} [Countable ?] {m n}
  {x : ? -> (M.obj m).Carrier} {s : (M.obj m).Carrier}
  (y : (N.obj n).Carrier),
  (M.obj m).HasSum x s ->
    (L.obj (m * n)).HasSum (fun i => app (x i) y) (app s y)
map_sum_right :
  forall {? : Type} [Countable ?] {m n}
    (x : (M.obj m).Carrier)
    {y : ? -> (N.obj n).Carrier} {s : (N.obj n).Carrier},
    (N.obj n).HasSum y s ->
      (L.obj (m * n)).HasSum (fun i => app x (y i)) (app x s)
naturality :
  forall {m' m n' n}
    (x : (M.obj m).Carrier) (y : (N.obj n).Carrier)
    (f : Superoperator m' m) (g : Superoperator n' n),
    app (M.act x f) (N.act y g) =
      L.act (app x y) (Superoperator.tensor f g)

```

#### 4.4.128 Extensionality for bilinear maps

**Statement.** For superoperator modules  $M, N, L$ : if for every  $m, n, x, y$ ,  $@b.app\ m\ n\ x\ y = @c.app\ m\ n\ x\ y$ , then  $b = c$ .

**Proof.** By case analysis on  $b$ . It follows from the hypothesis that for every  $m, n, x, y$ ,  $@b.app\ m\ n\ x\ y = @c.app\ m\ n\ x\ y$ .

**Lean 4 source** [QLambda/Domain/Presheaf/Bilinear.lean](#)

```

theorem ext {M : Module.{u}} {N : Module.{v}} {L : Module.{w}}
  {b c : Bilinear M N L}
  (h : forall m n x y, @b.app m n x y = @c.app m n x y) :
  b = c := by
  cases b
  cases c
  congr
  funext m n x y
  exact h m n x y

```

#### 4.4.129 Postcomposition of a bilinear map by a module morphism

**Definition.** Postcomposition of a bilinear map by a module morphism.

**Construction.** Constructed by supplying each component: application, functorial action zero left, functorial action zero right, functorial action sum left, functorial action sum right and naturality. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/Presheaf/Bilinear.lean](#)

```

def Bilinear.postcomp {M : Module.{u}} {N : Module.{v}}
  {L : Module.{w}} {K : Module.{u}}
  (f : Hom L K) (b : Bilinear M N L) : Bilinear M N K where
  app := fun x y => f.app _ (b.app x y)
  map_zero_left := by
    intro m n y

```

```

    rw [b.map_zero_left, f.map_zero]
map_zero_right := by
  intro m n x
  rw [b.map_zero_right, f.map_zero]
map_sum_left := by
  intro ? _ m n xs s y h
  exact f.map_sum (b.map_sum_left y h)
map_sum_right := by
  intro ? _ m n x ys s h
  exact f.map_sum (b.map_sum_right x h)
naturality := by
  intro m' m n' n x y g h
  rw [b.naturality, f.naturality]

```

#### 4.4.130 Summability of the fiber, at zero

**Statement.** The family `fun _` sums to 0. Formally: `X.HasSum fun _ 0`.

**Proof.** Both sides are compared pointwise (by extensionality). The goal is closed by simplification with the defining equations.

#### Lean 4 source `QLambda/Domain/Presheaf/BilinearSums.lean`

```

private theorem fiber_hasSum_zero (X : Fiber) {? : Type} [Countable ?] :
  X.HasSum (fun _ : ? => (0 : X.Carrier)) 0 := by
  have he :
    X.HasSum (fun i : ({}) : Set ?) => (0 : X.Carrier)) 0 := by
    convert ((X.summation.reindex (Equiv.Set.empty ?)
      (fun i : Empty => nomatch i) 0).mpr X.summation.empty) using 1
    funext i
    exact i.property.elim
  exact (X.summation.remove_zero
    (fun _ : ? => (0 : X.Carrier)) {}) 0 (by simp)).mp he

```

#### 4.4.131 Pointwise sums of bilinear maps

**Definition.** Pointwise sums of bilinear maps.

**Construction.** Defined by an explicit formula built from the application.

#### Lean 4 source `QLambda/Domain/Presheaf/BilinearSums.lean`

```

def HasSum {M A N : Module} {? : Type} [Countable ?]
  (f : ? -> Bilinear M A N) (s : Bilinear M A N) : Prop :=
  forall m n (x : (M.obj m).Carrier) (y : (A.obj n).Carrier),
    (N.obj (m * n)).HasSum
      (fun i => (f i).app x y) (s.app x y)

```

#### 4.4.132 Definition of the sum of bilinear maps

**Definition.** The sum of `f` is a bilinear map.

**Construction.** Constructed by supplying each component: application, functorial action zero left, functorial action zero right, functorial action sum left, inverse fun, left inverse, right inverse and functorial action sum right, among others. The accompanying laws are verified from the definitions.

#### Lean 4 source `QLambda/Domain/Presheaf/BilinearSums.lean`

```

noncomputable def sumOf {M A N : Module}
  {? : Type} [Countable ?] (f : ? -> Bilinear M A N)
  (h : forall m n (x : (M.obj m).Carrier) (y : (A.obj n).Carrier),
    exists z, (N.obj (m * n)).HasSum (fun i => (f i).app x y) z) :
  Bilinear M A N where
app := fun {m n} x y => Classical.choose (h m n x y)
map_zero_left := by
  intro m n y
  apply (N.obj (m * n)).summation.unique
    (Classical.choose_spec (h m n 0 y))
  simpa only [map_zero_left] using
    (fiber_hasSum_zero (N.obj (m * n)) (? := ?))
map_zero_right := by
  intro m n x
  apply (N.obj (m * n)).summation.unique
    (Classical.choose_spec (h m n x 0))
  simpa only [map_zero_right] using
    (fiber_hasSum_zero (N.obj (m * n)) (? := ?))
map_sum_left := by
  intro ? _ m n x s y hs
  let F : (i : ?) -> ? -> (N.obj (m * n)).Carrier :=
    fun i k => (f i).app (x k) y
  have hrows :
    forall i, (N.obj (m * n)).HasSum (F i) ((f i).app s y) :=
    fun i => (f i).map_sum_left y hs
  have houter :
    (N.obj (m * n)).HasSum
      (fun i => (f i).app s y)
      (Classical.choose (h m n s y)) :=
    Classical.choose_spec (h m n s y)
  have hflat :=
    ((N.obj (m * n)).summation.flatten F
      (Classical.choose (h m n s y))).2
    <fun i => (f i).app s y, hrows, houter>
  let e : (Sigma _ : ?, ?) ? (Sigma _ : ?, ?) :=
    { toFun := fun p => <p.2, p.1>
      invFun := fun p => <p.2, p.1>
      left_inv := fun _ => rfl
      right_inv := fun _ => rfl }
  have hswap :
    (N.obj (m * n)).HasSum
      (fun p : Sigma _ : ?, ? => F p.2 p.1)
      (Classical.choose (h m n s y)) := by
    exact ((N.obj (m * n)).summation.reindex e.symm
      (fun p : Sigma _ : ?, ? => F p.1 p.2)
      (Classical.choose (h m n s y))).2 hflat
  obtain <g, hg, hgs> :=
    ((N.obj (m * n)).summation.flatten
      (fun k i => F i k) (Classical.choose (h m n s y))).1 hswap
  convert hgs using 1

```



```

funext k
exact (N.obj (m * n)).summation.unique
  (Classical.choose_spec (h m n (x k) y)) (hg k)
map_sum_right := by
  intro ? _ m n x y s hs
  let F : (i : ?) -> ? -> (N.obj (m * n)).Carrier :=
    fun i k => (f i).app x (y k)
  have hrows :
    forall i, (N.obj (m * n)).HasSum (F i) ((f i).app x s) :=
    fun i => (f i).map_sum_right x hs
  have houter :
    (N.obj (m * n)).HasSum
      (fun i => (f i).app x s)
      (Classical.choose (h m n x s)) :=
    Classical.choose_spec (h m n x s)
  have hflat :=
    ((N.obj (m * n)).summation.flatten F
      (Classical.choose (h m n x s))).2
    <fun i => (f i).app x s, hrows, houter>
  let e : (Sigma _ : ?, ?) ? (Sigma _ : ?, ?) :=
    { toFun := fun p => <p.2, p.1>
      invFun := fun p => <p.2, p.1>
      left_inv := fun _ => rfl
      right_inv := fun _ => rfl }
  have hswap :
    (N.obj (m * n)).HasSum
      (fun p : Sigma _ : ?, ? => F p.2 p.1)
      (Classical.choose (h m n x s)) := by
    exact ((N.obj (m * n)).summation.reindex e.symm
      (fun p : Sigma _ : ?, ? => F p.1 p.2)
      (Classical.choose (h m n x s))).2 hflat
  obtain <g, hg, hgs> :=
    ((N.obj (m * n)).summation.flatten
      (fun k i => F i k) (Classical.choose (h m n x s))).1 hswap
  convert hgs using 1
funext k
exact (N.obj (m * n)).summation.unique
  (Classical.choose_spec (h m n x (y k))) (hg k)
naturality := by
  intro m' m n' n x y p q
  apply (N.obj (m' * n')).summation.unique
    (Classical.choose_spec
      (h m' n' (M.act x p) (A.act y q)))
  have hs := N.act_sum_element (Superoperator.tensor p q)
    (Classical.choose_spec (h m n x y))
  convert hs using 1
funext i
exact (f i).naturality x y p q

```

#### 4.4.133 Summability of the sum

**Statement.** For superoperator modules  $M, A, N$ : if for every  $m, n$ ,  $(x$ , there is  $z$  such that the family  $\text{fun } i \Rightarrow (f i).app x y$  sums to  $z$ , then the family  $f$  sums to  $\text{sumOf } f h$ .

**Proof.** Given the data, the conclusion is produced directly.

#### Lean 4 source `QLambda/Domain/Presheaf/BilinearSums.lean`

```
theorem sumOf_hasSum {M A N : Module}
  {? : Type} [Countable ?] (f : ? -> Bilinear M A N)
  (h : forall m n (x : (M.obj m).Carrier) (y : (A.obj n).Carrier),
    exists z, (N.obj (m * n)).HasSum (fun i => (f i).app x y) z) :
  HasSum f (sumOf f h) :=
  fun m n x y => Classical.choose_spec (h m n x y)
```

#### 4.4.134 Definition of the bilinear map of zero

**Definition.** The zero of  $M$ ,  $A$  and  $N$  is a bilinear map.

**Construction.** Constructed by supplying each component: application, functorial action zero left, functorial action zero right, functorial action sum left, functorial action sum right and naturality. The accompanying laws are verified from the definitions.

#### Lean 4 source `QLambda/Domain/Presheaf/BilinearSums.lean`

```
noncomputable def zero (M A N : Module) : Bilinear M A N where
  app := fun _ _ => 0
  map_zero_left := fun _ => rfl
  map_zero_right := fun _ => rfl
  map_sum_left := by
    intro ? _ m n x s y h
    exact fiber_hasSum_zero (N.obj (m * n))
  map_sum_right := by
    intro ? _ m n x y s h
    exact fiber_hasSum_zero (N.obj (m * n))
  naturality := by
    intro m' m n' n x y f g
    exact (N.act_zero_element _).symm
```

#### 4.4.135 Zero element on bilinear maps

**Definition.** Equip  $\text{Bilinear } M \ A \ N$  with its canonical zero element.

**Construction.** Given by  $\langle \text{zero } M \ A \ N \rangle$ .

#### Lean 4 source `QLambda/Domain/Presheaf/BilinearSums.lean`

```
noncomputable instance instZeroBilinear (M A N : Module) : Zero (Bilinear M A N) :=
  <zero M A N>
```

#### 4.4.136 Definition of the partial countable sum of bilinear maps

**Definition.** The partial countable sum of  $M$ ,  $A$  and  $N$  is an element of  $\text{@SigmaMon.PartialCountable Sum (Bilinear } M \ A \ N) \ \langle \text{zero } M \ A \ N \rangle$ .

**Construction.** Constructed by supplying each component: summability, uniqueness, empty, singleton, remove zero, reindexing and flatten. The accompanying laws are verified from the definitions.

#### Lean 4 source `QLambda/Domain/Presheaf/BilinearSums.lean`

```

noncomputable def partialCountableSum (M A N : Module) :
  @SigmaMon.PartialCountableSum (Bilinear M A N) <zero M A N> where
HasSum := HasSum
unique := by
  intro ? _ f s t hs ht
  apply Bilinear.ext
  intro m n x y
  exact (N.obj (m * n)).summation.unique
    (hs m n x y) (ht m n x y)
empty := by
  intro m n x y
  convert (N.obj (m * n)).summation.empty using 1
  rfl
singleton := by
  intro b m n x y
  exact (N.obj (m * n)).summation.singleton _
remove_zero := by
  intro ? _ f u b hz
  constructor <;> intro h m n x y
  * apply ((N.obj (m * n)).summation.remove_zero
    (fun i => (f i).app x y) u (b.app x y) ?_).1
  * exact h m n x y
  * intro i hi
    rw [hz i hi]
    rfl
  * apply ((N.obj (m * n)).summation.remove_zero
    (fun i => (f i).app x y) u (b.app x y) ?_).2
  * exact h m n x y
  * intro i hi
    rw [hz i hi]
    rfl
reindex := by
  intro ? ? _ _ e f b
  constructor <;> intro h m n x y
  * exact ((N.obj (m * n)).summation.reindex e
    (fun i => (f i).app x y) (b.app x y)).1 (h m n x y)
  * exact ((N.obj (m * n)).summation.reindex e
    (fun i => (f i).app x y) (b.app x y)).2 (h m n x y)
flatten := by
  intro ? _ ? _ f b
  constructor
  * intro hflat
    have hexists (i : ?) m n
      (x : (M.obj m).Carrier) (y : (A.obj n).Carrier) :
      exists z, (N.obj (m * n)).HasSum
      (fun j => (f i j).app x y) z := by
    obtain <v, hv, _> :=
      ((N.obj (m * n)).summation.flatten
      (fun i j => (f i j).app x y) (b.app x y)).1
      (hflat m n x y)
    exact <v i, hv i>
  let g : ? -> Bilinear M A N :=
    fun i => sumOf (f i) (hexists i)
  have hg : forall i, HasSum (f i) (g i) :=
    fun i => sumOf_hasSum (f i) (hexists i)
  refine <g, hg, ?_>

```

```

intro m n x y
obtain <v, hv, hvs> :=
  ((N.obj (m * n)).summation.flatten
   (fun i j => (f i j).app x y) (b.app x y)).1
  (hflat m n x y)
convert hvs using 1
funext i
exact (N.obj (m * n)).summation.unique
  (hg i m n x y) (hv i)
* rintro <g, hg, hgb> m n x y
exact ((N.obj (m * n)).summation.flatten
  (fun i j => (f i j).app x y) (b.app x y)).2
  <fun i => (g i).app x y,
  fun i => hg i m n x y, hgb m n x y>

```

#### 4.4.137 Evaluation of an admissible coend term preserves pointwise sums of its bilinear interpretations

**Statement.** Evaluation of an admissible coend term preserves pointwise sums of its bilinear interpretations. Formally:  $(N.obj\ n).HasSum\ (fun\ i\ =>\ DayCoend.Raw.value\ t\ ht\ N\ (f\ i))\ (DayCoend.Raw.value\ t\ ht\ N\ s)$ .

**Proof.** By induction on  $t$ . For zero and a generator, the claim is checked directly; for a sum, the claim follows from the induction hypothesis. It follows from the summability of the fiber, at zero and the uniqueness of the evaluation.

#### Lean 4 source `QLambda/Domain/Presheaf/BilinearSums.lean`

```

private theorem Raw.value_hasSum {M A N : Module}
  {? : Type} [Countable ?] {n : Nat}
  (t : DayCoend.Raw M A n) (ht : t.Admissible) (hh : t.Hereditary)
  (f : ? -> Bilinear M A N) (s : Bilinear M A N)
  (h : HasSum f s) :
  (N.obj n).HasSum
    (fun i => DayCoend.Raw.value t ht N (f i))
    (DayCoend.Raw.value t ht N s) := by
  induction t with
  | zero =>
    convert fiber_hasSum_zero (N.obj n) (? := ?) using 1
    * funext i
      exact (DayCoend.Raw.eval_unique .zero ht N (f i)
        DayCoend.Raw.Eval.zero).symm
    * exact (DayCoend.Raw.eval_unique .zero ht N s
      DayCoend.Raw.Eval.zero).symm
  | @generator a b x y q =>
    have hs := N.act_sum_element q (h a b x y)
    convert hs using 1
    * funext i
      exact (DayCoend.Raw.eval_unique (.generator x y q) ht N (f i)
        (DayCoend.Raw.Eval.generator x y q)).symm
    * exact (DayCoend.Raw.eval_unique (.generator x y q) ht N s
      (DayCoend.Raw.Eval.generator x y q)).symm
  | sum u ih =>
    choose v hv hvs using fun i =>

```

```

    DayCoend.Raw.eval_sum_cases (f i) u
      (DayCoend.Raw.eval_value (.sum u) ht N (f i))
obtain <w, hw, hws> :=
  DayCoend.Raw.eval_sum_cases s u
    (DayCoend.Raw.eval_value (.sum u) ht N s)
let F : ? -> Nat -> (N.obj n).Carrier :=
  fun i k => DayCoend.Raw.value (u k) (hh k).2 N (f i)
have hrow (i : ?) :
  (N.obj n).HasSum (F i)
  (DayCoend.Raw.value (.sum u) ht N (f i)) := by
  convert hvs i using 1
  funext k
  exact (DayCoend.Raw.eval_unique (u k) (hh k).2
    N (f i) (hv i k)).symm
have hcol (k : Nat) :
  (N.obj n).HasSum (fun i => F i k)
  (DayCoend.Raw.value (u k) (hh k).2 N s) :=
  ih k (hh k).2 (hh k).1
have htarget :
  (N.obj n).HasSum
    (fun k => DayCoend.Raw.value (u k) (hh k).2 N s)
  (DayCoend.Raw.value (.sum u) ht N s) := by
  convert hws using 1
  funext k
  exact (DayCoend.Raw.eval_unique (u k) (hh k).2 N s (hw k)).symm
have hflatKI :
  (N.obj n).HasSum
    (fun p : Sigma _ : Nat, ? => F p.2 p.1)
  (DayCoend.Raw.value (.sum u) ht N s) :=
  ((N.obj n).summation.flatten
    (fun k i => F i k)
    (DayCoend.Raw.value (.sum u) ht N s)).2
  <fun k => DayCoend.Raw.value (u k) (hh k).2 N s,
    hcol, htarget>
let e : (Sigma _ : ?, Nat) ? (Sigma _ : Nat, ?) :=
  { toFun := fun p => <p.2, p.1>
    invFun := fun p => <p.2, p.1>
    left_inv := fun _ => rfl
    right_inv := fun _ => rfl }
have hflatIK :
  (N.obj n).HasSum
    (fun p : Sigma _ : ?, Nat => F p.1 p.2)
  (DayCoend.Raw.value (.sum u) ht N s) := by
  exact ((N.obj n).summation.reindex e
    (fun p : Sigma _ : Nat, ? => F p.2 p.1)
    (DayCoend.Raw.value (.sum u) ht N s)).2 hflatKI
obtain <g, hg, hgs> :=
  ((N.obj n).summation.flatten F
    (DayCoend.Raw.value (.sum u) ht N s)).1 hflatIK
convert hgs using 1
funext i
exact (N.obj n).summation.unique (hrow i) (hg i)

```

#### 4.4.138 The Day universal map is enriched: pointwise sums of bilinear interpretations become pointwise sums of module morphisms

**Statement.** The Day universal map is enriched: pointwise sums of bilinear interpretations become pointwise sums of module morphisms. Formally:  $\text{Hom.HasSum } (\text{fun } i \Rightarrow \text{DayCoend.lift } (f \ i)) \ (\text{DayCoend.lift } s)$ .

**Proof.** The argument proceeds by induction. It follows from the fact that evaluation of an admissible coend term preserves pointwise sums of its bilinear interpretations.

##### Lean 4 source `QLambda/Domain/Presheaf/BilinearSums.lean`

```
theorem lift_hasSum {M A N : Module} {? : Type} [Countable ?]
  {f : ? -> Bilinear M A N} {s : Bilinear M A N}
  (h : HasSum f s) :
  Hom.HasSum (fun i => DayCoend.lift (f i)) (DayCoend.lift s) := by
  intro n x
  induction x using Quotient.inductionOn with
  | _ t => exact Raw.value_hasSum t.1 t.2.1 t.2.2 f s h
```

#### 4.4.139 Tensoring on the left preserves every defined sum of module maps

**Statement.** Tensoring on the left preserves every defined sum of module maps. Formally:  $\text{Hom.HasSum } (\text{fun } i \Rightarrow \text{map } (f \ i) \ g) \ (\text{map } s \ g)$ .

**Proof.** It follows from the fact that the Day universal map is enriched: pointwise sums of bilinear interpretations become pointwise sums of module morphisms and the definition of the introduction.

##### Lean 4 source `QLambda/Domain/Presheaf/BilinearSums.lean`

```
theorem map_hasSum_left {M M' N N' : Module}
  {? : Type} [Countable ?]
  {f : ? -> Hom M M'} {s : Hom M M'} (g : Hom N N')
  (h : Hom.HasSum f s) :
  Hom.HasSum (fun i => map (f i) g) (map s g) := by
  apply Bilinear.lift_hasSum
  intro m n x y
  exact (DayCoend.intro M' N').map_sum_left (g.app n y) (h m x)
```

#### 4.4.140 Tensoring on the right preserves every defined sum of module maps

**Statement.** Tensoring on the right preserves every defined sum of module maps. Formally:  $\text{Hom.HasSum } (\text{fun } i \Rightarrow \text{map } f \ (g \ i)) \ (\text{map } f \ s)$ .

**Proof.** It follows from the fact that the Day universal map is enriched: pointwise sums of bilinear interpretations become pointwise sums of module morphisms and the definition of the introduction.

##### Lean 4 source `QLambda/Domain/Presheaf/BilinearSums.lean`

```
theorem map_hasSum_right {M M' N N' : Module}
  {? : Type} [Countable ?]
  {f : Hom M M'} {g : ? -> Hom N N'} {s : Hom N N'}
  (h : Hom.HasSum g s) :
  Hom.HasSum (fun i => map f (g i)) (map f s) := by
```

```

apply Bilinear.lift_hasSum
intro m n x y
exact (DayCoend.intro M' N').map_sum_right (f.app m x) (h n y)

```

#### 4.4.141 The mathematically valid full category of Day-biorthogonal objects

**Definition.** The mathematically valid full category of Day-biorthogonal objects. Objects contain a pseudo-basis and an inverse to the canonical unit.

**Construction.** Constructed by supplying each component: obj, morphism, identity, composition, identity composite, composite identity and associativity. The accompanying laws are verified from the definitions.

#### Lean 4 source `QLambda/Domain/Presheaf/BiorthogonalCategory.lean`

```

noncomputable def biorthogonalCategory : CategoryPresentation where
  Obj := ClassicalObject (DayNegation.data)
  hom := ClassicalObject.Hom
  id := ClassicalObject.id _
  comp := ClassicalObject.comp
  id_comp := ClassicalObject.id_comp
  comp_id := ClassicalObject.comp_id
  assoc := fun h g f => (ClassicalObject.comp_assoc h g f).symm

```

#### 4.4.142 The input effect $\sum_i A_i^\dagger A_i$ of a Kraus family

**Definition.** The input effect  $\sum_i A_i^\dagger A_i$  of a Kraus family.

**Construction.** Defined to be  $(K.map \text{ fun } A \Rightarrow A^\dagger * A).sum$ .

#### Lean 4 source `QLambda/Domain/Presheaf/CPMap.lean`

```

def effect (K : KrausFamily n m) : Matrix (Fin n) (Fin n) ? :=
  (K.map fun A => A? * A).sum

```

#### 4.4.143 Trace of a product of the outer product for Kraus families

**Statement.** For a matrix  $E$ , an index  $x$ : the trace of the product of  $E$  and the outer product of  $x$  and  $\text{star } x$  equals  $\text{star } x \cdot E *_{\vee} x$ .

**Proof.** The key step rewrites with distributivity of multiplication over finite sums and the sum of a congruence. The remaining identity is a polynomial identity in a commutative ring.

#### Lean 4 source `QLambda/Domain/Presheaf/CPMap.lean`

```

private theorem trace_mul_vecMulVec
  (E : Matrix (Fin n) (Fin n) ?) (x : Fin n -> ?) :
  Matrix.trace (E * Matrix.vecMulVec x (star x)) =
  star x ?? E *? x := by
  change (? i, ? j, E i j * (x j * star (x i))) =
  ? i, star (x i) * ? j, E i j * x j
  apply Finset.sum_congr rfl
  intro i _

```

```

rw [Finset.mul_sum]
apply Finset.sum_congr rfl
intro j _
ring

```

#### 4.4.144 Trace of the outer product of itself for Kraus families

**Statement.** For an index  $x$ : the trace of the outer product of  $x$  and  $\text{star } x$  equals the adjoint of  $x$ ,  $\cdot_v$ ,  $x$ .

**Proof.** The key step rewrites with standard identities for matrices and the sum of a congruence. The remaining identity is a polynomial identity in a commutative ring.

**Lean 4 source** `QLambda/Domain/Presheaf/CPMap.lean`

```

private theorem trace_vecMulVec_self (x : Fin n -> ?) :
  Matrix.trace (Matrix.vecMulVec x (star x)) = star x ?? x := by
  rw [Matrix.trace_vecMulVec]
  apply Finset.sum_congr rfl
  intro i _
  ring

```

#### 4.4.145 Quad of a difference of one for Kraus families

**Statement.** For a matrix  $E$ , an index  $x$ :  $\text{star } x \cdot (1 - E) \cdot_v x$  equals the difference of the trace of  $\text{Matrix.vecMulVec } x \text{ (star } x)$  and the trace of  $E \star \text{Matrix.vecMulVec } x \text{ (star } x)$ .

**Proof.** The key step rewrites with standard identities for matrices, the usual algebraic identities, the trace of a product of the outer product for Kraus families and the trace of the outer product of itself for Kraus families.

**Lean 4 source** `QLambda/Domain/Presheaf/CPMap.lean`

```

private theorem quad_sub_one
  (E : Matrix (Fin n) (Fin n) ?) (x : Fin n -> ?) :
  star x ?? (1 - E) ?? x =
    Matrix.trace (Matrix.vecMulVec x (star x)) -
    Matrix.trace (E * Matrix.vecMulVec x (star x)) := by
  rw [Matrix.sub_mulVec, Matrix.one_mulVec, dotProduct_sub,
    trace_mul_vecMulVec, trace_vecMulVec_self]

```

#### 4.4.146 Trace of a Kraus action is pairing with its input effect

**Statement.** Trace of a Kraus action is pairing with its input effect. Formally:  $\text{tr } (\text{applyMat } K \rho) = \text{tr } (\text{effect } K \star \rho)$ .

**Proof.** By induction on the Kraus family  $K$ . For the empty split, the claim is checked directly; for a context extended by one cell, the claim follows from the induction hypothesis. The key step rewrites with the definition of the action on a matrix, the definition of the effect, the action on a matrix of an extended list for Kraus families and standard identities for matrices.

**Lean 4 source** `QLambda/Domain/Presheaf/CPMap.lean`



```

theorem trace_applyMat_eq_effect (K : KrausFamily n m)
  (? : Matrix (Fin n) (Fin n) ?) :
  Matrix.trace (applyMat K ?) = Matrix.trace (effect K * ?) := by
induction K with
| nil => simp [applyMat, effect]
| cons A K ih =>
  rw [applyMat_cons, Matrix.trace_add, ih]
  rw [Matrix.trace_mul_comm (A * ?) A?, <- Matrix.mul_assoc]
  simp [effect, Matrix.add_mul, Matrix.trace_add]

```

#### 4.4.147 Positive semidefiniteness of the effect

**Statement.** For the Kraus family  $K$ :  $\text{effect } K$  is positive semidefinite.

**Proof.** By induction on the Kraus family  $K$ . For the empty split, the claim is checked directly; for a context extended by one cell, the claim follows from the induction hypothesis. The goal is simplified using the definition of the effect, standard identities for lists and standard identities for matrices.

#### Lean 4 source `QLambda/Domain/Presheaf/CPMap.lean`

```

theorem effect_posSemidef (K : KrausFamily n m) :
  (effect K).PosSemidef := by
induction K with
| nil =>
  simp [effect] using
  (Matrix.PosSemidef.zero :
    (0 : Matrix (Fin n) (Fin n) ?).PosSemidef)
| cons A K ih =>
  simp only [effect, List.map_cons, List.sum_cons]
  exact (Matrix.posSemidef_conjTranspose_mul_self A).add ih

```

#### 4.4.148 Testing TNI on all positive inputs forces the input effect below identity

**Statement.** Testing TNI on all positive inputs forces the input effect below identity. Formally:  $\text{effect } K \leq 1$ .

**Proof.** The key step rewrites with the characterization of the order for subnormalized density matrices, the definition of the order for quantum relations, the quad of a difference of one for Kraus families and the fact that trace of a Kraus action is pairing with its input effect.

#### Lean 4 source `QLambda/Domain/Presheaf/CPMap.lean`

```

theorem effect_le_one_of_trace_nonincreasing (K : KrausFamily n m)
  (hK : forall ? : Matrix (Fin n) (Fin n) ?, ?.PosSemidef ->
    (Matrix.trace (applyMat K ?)).re <= (Matrix.trace ?).re) :
  effect K <= 1 := by
  rw [Matrix.le_iff]
  apply Matrix.PosSemidef.of_dotProduct_mulVec_nonneg
  * exact Matrix.IsHermitian.sub Matrix.isHermitian_one
    (effect_posSemidef K).isHermitian
  * intro x
  let ? := Matrix.vecMulVec x (star x)
  have h? : ?.PosSemidef :=
    Matrix.posSemidef_vecMulVec_self_star x

```

```

have hout : 0 <= Matrix.trace (applyMat K ?) :=
  (applyMat_posSemidef K h?).trace_nonneg
have hin : 0 <= Matrix.trace ? := h?.trace_nonneg
have hle : Matrix.trace (applyMat K ?) <= Matrix.trace ? := by
  rw [Complex.le_def]
  exact
    <hK ? h?,
      (Complex.nonneg_iff.mp hout).2.symm.trans
      (Complex.nonneg_iff.mp hin).2>
rw [quad_sub_one, <- trace_applyMat_eq_effect]
exact sub_nonneg.mpr hle

```

#### 4.4.149 Nonnegativity of the trace of a product, assuming positive semidefiniteness

**Statement.** For matrixes  $A, \rho$ : if  $A$  is positive semidefinite and  $\rho$  is positive semidefinite, then  $0 \leq \text{tr} (A * \rho)$ .

**Proof.** The hypotheses are unpacked into their constituent data. The key step rewrites with standard identities for matrices, the trace of a product of the outer product for Kraus families, standard identities for finite sums and the hypothesis that  $A$  is positive semidefinite.

##### Lean 4 source `QLambda/Domain/Presheaf/CPMap.lean`

```

private theorem trace_mul_nonneg_of_posSemidef
  {A ? : Matrix (Fin n) (Fin n) ?}
  (hA : A.PosSemidef) (h? : ?.PosSemidef) :
  0 <= Matrix.trace (A * ?) := by
  obtain <k, v, rfl> :=
    Matrix.posSemidef_iff_eq_sum_vecMulVec.mp h?
  rw [Matrix.mul_sum, Matrix.trace_sum]
  exact Finset.sum_nonneg fun i _ => by
    rw [trace_mul_vecMulVec]
    exact hA.dotProduct_mulVec_nonneg (v i)

```

#### 4.4.150 The effect bound implies trace non-increase on every positive input

**Statement.** The effect bound implies trace non-increase on every positive input. Formally:  $\rho.\text{PosSemidef} \rightarrow (\text{tr} (\text{applyMat } K \rho)).\text{re} \leq (\text{tr } \rho).\text{re}$ .

**Proof.** The key step rewrites with standard identities for matrices, standard identities for complex numbers and the fact that trace of a Kraus action is pairing with its input effect.

##### Lean 4 source `QLambda/Domain/Presheaf/CPMap.lean`

```

theorem trace_nonincreasing_of_effect_le_one (K : KrausFamily n m)
  (hK : effect K <= 1) :
  forall ? : Matrix (Fin n) (Fin n) ?, ?.PosSemidef ->
    (Matrix.trace (applyMat K ?)).re <= (Matrix.trace ?).re := by
  intro ? h?
  have hdiff : (1 - effect K).PosSemidef := Matrix.le_iff.mp hK
  have htr := trace_mul_nonneg_of_posSemidef hdiff h?
  have hre := (Complex.nonneg_iff.mp htr).1
  rw [Matrix.sub_mul, Matrix.one_mul, Matrix.trace_sub, Complex.sub_re] at hre
  rw [trace_applyMat_eq_effect]

```

```
exact sub_nonneg.mp hre
```

#### 4.4.151 An intrinsic completely positive map, represented by its positive semidefinite Choi matrix

**Definition.** An intrinsic completely positive map, represented by its positive semidefinite Choi matrix.

**Construction.** An element consists of `choi`, subject to the laws `choi_pos`.

**Lean 4 source** [QLambda/Domain/Presheaf/CPMap.lean](#)

```
structure CPMAP (n m : Nat) where
  choi : Matrix (Fin m x Fin n) (Fin m x Fin n) ?
  choi_pos : choi.PosSemidef
```

#### 4.4.152 Extensionality for completely positive maps

**Statement.** For completely positive maps  $\Phi, \Psi$ : if  $\Phi.\text{choi} = \Psi.\text{choi}$ , then  $\Phi = \Psi$ .

**Proof.** By case analysis on the completely positive map  $\Phi$ .

**Lean 4 source** [QLambda/Domain/Presheaf/CPMap.lean](#)

```
theorem ext {? ? : CPMAP n m} (h : ?.choi = ?.choi) : ? = ? := by
  cases ?
  cases ?
  cases h
  rfl
```

#### 4.4.153 A finite Kraus presentation determines an intrinsic CP map

**Definition.** A finite Kraus presentation determines an intrinsic CP map.

**Construction.** Constructed by supplying each component: Choi matrix and Choi positivity. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/Presheaf/CPMap.lean](#)

```
def ofKraus (K : KrausFamily n m) : CPMAP n m where
  choi := KrausFamily.choi K
  choi_pos := KrausFamily.choi_posSemidef K
```

#### 4.4.154 Choi matrix of the map determined by a Kraus family

**Statement.** For the Kraus family  $K$ :  $(\text{ofKraus } K).\text{choi}$  equals the Choi matrix of  $K$ .

**Proof.** By definition. Unfolding the Choi matrix turns the left-hand side,  $(\text{ofKraus } K).\text{choi}$ , into the right-hand side, the Choi matrix of  $K$ ; the two sides are the same term.

**Lean 4 source** [QLambda/Domain/Presheaf/CPMap.lean](#)

```
theorem choi_ofKraus (K : KrausFamily n m) :
  (ofKraus K).choi = KrausFamily.choi K :=
  rfl
```

#### 4.4.155 Every intrinsic finite-dimensional CP map has a finite Kraus presentation

**Definition.** Every intrinsic finite-dimensional CP map has a finite Kraus presentation. No choice of presentation is exposed as semantic data.

**Construction.** Defined to be the choose of the existence Kraus family Choi equality of  $\Phi$ .choi\_pos.

##### Lean 4 source `QLambda/Domain/Presheaf/CPMap.lean`

```
noncomputable def toKraus (? : CPMMap n m) : KrausFamily n m :=
  Classical.choose (KrausFamily.exists_krausFamily_choi_eq ?.choi_pos)
```

#### 4.4.156 Choi matrix of the Kraus presentation

**Statement.** For a completely positive map  $\Phi$ : the Choi matrix of the Kraus presentation of  $\Phi$  equals the Choi matrix of  $\Phi$ .

**Proof.** The proof term combines the facts named in it directly.

##### Lean 4 source `QLambda/Domain/Presheaf/CPMap.lean`

```
theorem choi_toKraus (? : CPMMap n m) :
  KrausFamily.choi (toKraus ?) = ?.choi :=
  Classical.choose_spec
  (KrausFamily.exists_krausFamily_choi_eq ?.choi_pos)
```

#### 4.4.157 Map determined by a Kraus family of the Kraus presentation

**Statement.** For a completely positive map  $\Phi$ : the CP map with Kraus family the Kraus presentation of  $\Phi$  equals  $\Phi$ .

**Proof.** This is an instance of the extensionality for completely positive maps.

##### Lean 4 source `QLambda/Domain/Presheaf/CPMap.lean`

```
theorem ofKraus_toKraus (? : CPMMap n m) : ofKraus (toKraus ?) = ? :=
  ext (choi_toKraus ?)
```

#### 4.4.158 The map determined by a Kraus family equals an equivalence

**Statement.** For Kraus families  $K, L$ : the CP map with Kraus family  $K$  equals  $\text{ofKraus } L \leftrightarrow \text{KrausFamily.SemEq } K \ L$ .

**Proof.** Both sides are compared pointwise (by extensionality). Each component of the claim is established separately. The key step rewrites with the Choi equality exactly characterizes extensional equality of finite Kraus presentations.

##### Lean 4 source `QLambda/Domain/Presheaf/CPMap.lean`

```
theorem ofKraus_eq_iff (K L : KrausFamily n m) :
  ofKraus K = ofKraus L <-> KrausFamily.SemEq K L := by
  rw [KrausFamily.semEq_iff_choi_eq]
  exact <fun h => congrArg choi h, fun h => ext h>
```

#### 4.4.159 Application to an arbitrary matrix

**Definition.** Application to an arbitrary matrix.

**Construction.** Defined to be the action of the Kraus presentation of  $\Phi$  on  $\rho$ .

**Lean 4 source** [QLambda/Domain/Presheaf/CPMap.lean](#)

```
noncomputable def applyMat (? : CMap n m)
  (? : Matrix (Fin n) (Fin n) ?) : Matrix (Fin m) (Fin m) ? :=
  KrausFamily.applyMat (toKraus ?) ?
```

#### 4.4.160 Action on a matrix of a map determined by a Kraus family

**Statement.** For the Kraus family  $K$ , a matrix  $\rho$ : the action of the CP map with Kraus family  $K$  on  $\rho$  equals the action of  $K$  on  $\rho$ .

**Proof.** The goal is simplified using the equality of Choi matrices implies extensional equality of the represented operator-sum maps.

**Lean 4 source** [QLambda/Domain/Presheaf/CPMap.lean](#)

```
theorem applyMat_ofKraus (K : KrausFamily n m)
  (? : Matrix (Fin n) (Fin n) ?) :
  applyMat (ofKraus K) ? = KrausFamily.applyMat K ? := by
  apply KrausFamily.semEq_of_choi_eq
  simp
```

#### 4.4.161 Pointwise formula for the extensionality

**Statement.** For completely positive maps  $\Phi, \Psi$ : if for every  $\rho$ ,  $\text{applyMat } \Phi \rho = \text{applyMat } \Psi \rho$ , then  $\Phi = \Psi$ .

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the Choi matrix of the Kraus presentation, the extensionality for completely positive maps and the extensional equality of operator-sum maps implies equality of their intrinsic Choi matrices.

**Lean 4 source** [QLambda/Domain/Presheaf/CPMap.lean](#)

```
theorem ext_apply {? ? : CMap n m}
  (h : forall ?, applyMat ? ? = applyMat ? ?) : ? = ? := by
  apply ext
  rw [ <- choi_toKraus ?, <- choi_toKraus ? ]
  exact KrausFamily.choi_eq_of_semEq h
```

#### 4.4.162 Positive semidefiniteness of the action on a matrix

**Statement.** For a completely positive map  $\Phi$ , a matrix  $\rho$ : if  $\rho$  is positive semidefinite, then  $\text{applyMat } \Phi \rho$  is positive semidefinite.

**Proof.** This is an instance of the fact that the operator-sum of a Kraus family is completely positive, applied to the hypothesis that  $\rho$  is positive semidefinite.

**Lean 4 source** [QLambda/Domain/Presheaf/CPMap.lean](#)

```

theorem applyMat_posSemidef (? : CPMMap n m)
  {? : Matrix (Fin n) (Fin n) ?} (h? : ?.PosSemidef) :
  (applyMat ? ?).PosSemidef :=
  KrausFamily.applyMat_posSemidef (toKraus ?) h?

```

#### 4.4.163 Action on a matrix of a sum for completely positive maps

**Statement.** For a completely positive map  $\Phi$ , matrixes  $\rho, \sigma$ : the action of  $\Phi$  on the sum of  $\rho$  and  $\sigma$  equals the sum of the action of  $\Phi$  on  $\rho$  and the action of  $\Phi$  on  $\sigma$ .

**Proof.** This is an instance of the action on a matrix of a sum for Kraus families.

**Lean 4 source** [QLambda/Domain/Presheaf/CPMap.lean](#)

```

theorem applyMat_add (? : CPMMap n m)
  (? sigma : Matrix (Fin n) (Fin n) ?) :
  applyMat ? (? + sigma) = applyMat ? ? + applyMat ? sigma :=
  KrausFamily.applyMat_add (toKraus ?) ? sigma

```

#### 4.4.164 Action on a matrix of a scalar multiple for completely positive maps

**Statement.** For a completely positive map  $\Phi$ , a complex number  $c$ , a matrix  $\rho$ : the action of  $\Phi$  on  $c \cdot \rho$  equals the action of  $\Phi$  on  $\rho$  scaled by  $c$ .

**Proof.** This is an instance of the action on a matrix of a scalar multiple for Kraus families.

**Lean 4 source** [QLambda/Domain/Presheaf/CPMap.lean](#)

```

theorem applyMat_smul (? : CPMMap n m) (c : ?)
  (? : Matrix (Fin n) (Fin n) ?) :
  applyMat ? (c * ?) = c * applyMat ? ? :=
  KrausFamily.applyMat_smul (toKraus ?) c ?

```

#### 4.4.165 The intrinsic input effect, obtained by tracing the Choi matrix over its output coordinate

**Definition.** The intrinsic input effect, obtained by tracing the Choi matrix over its output coordinate. The transposed input coordinates agree with  $\sum_i A_i^\dagger A_i$ .

**Construction.** The map sending  $i \ j$  to  $\sum a, \Phi.choi(a, j)(a, i)$ .

**Lean 4 source** [QLambda/Domain/Presheaf/CPMap.lean](#)

```

def effect (? : CPMMap n m) : Matrix (Fin n) (Fin n) ? :=
  fun i j => ? a, ?.choi(a, j)(a, i)

```

#### 4.4.166 Effect of a map determined by a Kraus family

**Statement.** For the Kraus family  $K$ : the effect of the CP map with Kraus family  $K$  equals the effect of  $K$ .

**Proof.** By induction on the Kraus family  $K$ . For the empty split, the claim is checked directly; for a context extended by one cell, the claim follows from the induction hypothesis. The key step rewrites with the definition of the effect, the definition of the Choi matrix, the Choi matrix of the map determined by

a Kraus family and the Choi matrix of an extended list for Kraus families. The remaining identity is a polynomial identity in a commutative ring.

#### Lean 4 source `QLambda/Domain/Presheaf/CPMap.lean`

```
theorem effect_ofKraus (K : KrausFamily n m) :
  effect (ofKraus K) = KrausFamily.effect K := by
  ext i j
  induction K with
  | nil => simp [effect, KrausFamily.effect, KrausFamily.choi]
  | cons A K ih =>
    simp only [effect, choi_ofKraus, KrausFamily.choi_cons,
      Matrix.add_apply, Finset.sum_add_distrib, KrausFamily.effect,
      List.map_cons, List.sum_cons]
    change (? a, KrausFamily.choiTerm A (a, j) (a, i)) +
      effect (ofKraus K) i j =
      (A? * A) i j + KrausFamily.effect K i j
    rw [ih]
    apply congrArg (* + KrausFamily.effect K i j)
    simp only [KrausFamily.choiTerm, Matrix.mul_apply,
      Matrix.conjTranspose_apply]
    apply Finset.sum_congr rfl
    intro a _
    ring
```

#### 4.4.167 Positive semidefiniteness of the effect

**Statement.** For a completely positive map  $\Phi$ :  $\Phi$ .effect is positive semidefinite.

**Proof.** The key step rewrites with the map determined by a Kraus family of the Kraus presentation, the effect of a map determined by a Kraus family and the positive semidefiniteness of the effect.

#### Lean 4 source `QLambda/Domain/Presheaf/CPMap.lean`

```
theorem effect_posSemidef (? : CPMMap n m) :
  ?.effect.PosSemidef := by
  rw [ <- ofKraus_toKraus ?, effect_ofKraus]
  exact KrausFamily.effect_posSemidef _
```

#### 4.4.168 Trace of an intrinsic CP action is pairing with its input effect

**Statement.** Trace of an intrinsic CP action is pairing with its input effect. Formally:  $\text{tr} (\text{applyMat } \Phi \rho) = \text{tr} (\Phi.\text{effect} * \rho)$ .

**Proof.** The key step rewrites with the map determined by a Kraus family of the Kraus presentation, the action on a matrix of a map determined by a Kraus family, the effect of a map determined by a Kraus family and the fact that trace of a Kraus action is pairing with its input effect.

#### Lean 4 source `QLambda/Domain/Presheaf/CPMap.lean`

```
theorem trace_applyMat_eq_effect (? : CPMMap n m)
  (? : Matrix (Fin n) (Fin n) ?) :
  Matrix.trace (applyMat ? ?) = Matrix.trace (?.effect * ?) := by
  rw [ <- ofKraus_toKraus ?, applyMat_ofKraus, effect_ofKraus]
```

```
exact KrausFamily.trace_applyMat_eq_effect _ _
```

#### 4.4.169 Intrinsic finite-dimensional TNI is equivalent to the Choi partial trace being below identity

**Statement.** Intrinsic finite-dimensional TNI is equivalent to the Choi partial trace being below identity. Formally:  $\Phi.\text{effect} \leq 1$ .

**Proof.** The claim follows from a chain of equalities (or inequalities). The key step rewrites with the action on a matrix of a map determined by a Kraus family, the definition of the  $k$  and the map determined by a Kraus family of the Kraus presentation.

##### Lean 4 source `QLambda/Domain/Presheaf/CPMap.lean`

```
theorem effect_le_one_of_trace_nonincreasing (? : CPMat n m)
  (h? : forall ? : Matrix (Fin n) (Fin n) ?, ?.PosSemidef ->
    (Matrix.trace (applyMat ? ?)).re <= (Matrix.trace ?).re) :
  ?.effect <= 1 := by
  let K := toKraus ?
  have hK : forall ? : Matrix (Fin n) (Fin n) ?, ?.PosSemidef ->
    (Matrix.trace (KrausFamily.applyMat K ?)).re <=
      (Matrix.trace ?).re := by
    intro ? h?
    rw [ <- applyMat_ofKraus ]
    simp [K] using h? ? h?
  calc
    ?.effect = effect (ofKraus K) := by
      change ?.effect = effect (ofKraus (toKraus ?))
      rw [ofKraus_toKraus]
    _ = KrausFamily.effect K := effect_ofKraus K
    _ <= 1 := KrausFamily.effect_le_one_of_trace_nonincreasing K hK
```

#### 4.4.170 Trace of the nonincreasing for completely positive maps, assuming effect of the order of one

**Statement.** For a completely positive map  $\Phi$ , a matrix  $\rho$ : if  $\Phi.\text{effect} \leq 1$  and  $\rho$  is positive semidefinite, then  $(\text{tr} (\text{applyMat } \Phi \rho)).\text{re} \leq (\text{tr } \rho).\text{re}$ .

**Proof.** The key step rewrites with the effect of a map determined by a Kraus family, the definition of the  $k$  and the effect bound implies trace non-increase on every positive input.

##### Lean 4 source `QLambda/Domain/Presheaf/CPMap.lean`

```
theorem trace_nonincreasing_of_effect_le_one (? : CPMat n m)
  (h? : ?.effect <= 1) :
  forall ? : Matrix (Fin n) (Fin n) ?, ?.PosSemidef ->
    (Matrix.trace (applyMat ? ?)).re <= (Matrix.trace ?).re := by
  let K := toKraus ?
  have hK : KrausFamily.effect K <= 1 := by
    rw [ <- effect_ofKraus ]
    simp [K] using h?
  intro ? h?
  rw [show applyMat ? ? = KrausFamily.applyMat K ? by
    rw [ <- applyMat_ofKraus ]
    simp [K]]
  exact KrausFamily.trace_nonincreasing_of_effect_le_one K hK ? h?
```



#### 4.4.171 The zero CP map

**Definition.** The zero CP map.

**Construction.** Defined to be the CP map with Kraus family the zero.

**Lean 4 source** [QLambda/Domain/Presheaf/CPMap.lean](#)

```
def zero : CMap n m :=  
  ofKraus KrausFamily.zero
```

#### 4.4.172 Addition of CP maps is addition of their Choi matrices

**Definition.** Addition of CP maps is addition of their Choi matrices.

**Construction.** Constructed by supplying each component: Choi matrix and Choi positivity. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/Presheaf/CPMap.lean](#)

```
def add (? ? : CMap n m) : CMap n m where  
  choi := ?.choi + ?.choi  
  choi_pos := ?.choi_pos.add ?.choi_pos
```

#### 4.4.173 Definition of the scale nonnegativity of completely positive maps

**Definition.** The scale nonnegativity of  $c$  and  $\Phi$  is a completely positive map from  $n$  to  $m$ .

**Construction.** Constructed by supplying each component: Choi matrix and Choi positivity. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/Presheaf/CPMap.lean](#)

```
noncomputable def scaleNonneg  
  (c : ?) (hc : 0 <= c) (? : CMap n m) : CMap n m where  
  choi := c * ?.choi  
  choi_pos := ?.choi_pos.smul hc
```

#### 4.4.174 Canonical nonnegative-real scalar multiplication on intrinsic CP maps

**Definition.** Canonical nonnegative-real scalar multiplication on intrinsic CP maps.

**Construction.** Constructed by supplying each component: Choi matrix and Choi positivity. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/Presheaf/CPMap.lean](#)

```
noncomputable def nnsml (c : NNReal) (? : CMap n m) : CMap n m where  
  choi := (c : ?) * ?.choi  
  choi_pos :=  
    ?.choi_pos.smul  
    (Complex.nonneg_iff.mpr <c.property, by simp>)
```

#### 4.4.175 Action on a matrix of zero for completely positive maps

**Statement.** For a matrix  $\rho$ : the action of 0 on  $\rho$  equals 0. Formally:  $\text{applyMat } 0 \ \rho = 0$ .

**Proof.** The key step rewrites with the action on a matrix of a map determined by a Kraus family and the action on a matrix of zero.

**Lean 4 source** `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
theorem applyMat_zero (? : Matrix (Fin n) (Fin n) ?) :
  applyMat (0 : CPMMap n m) ? = 0 := by
  rw [show (0 : CPMMap n m) = ofKraus KrausFamily.zero from rfl,
    applyMat_ofKraus, KrausFamily.applyMat_zero]
```

#### 4.4.176 Map determined by a Kraus family of a concatenation

**Statement.** For Kraus families  $K, L$ : the CP map with Kraus family the concatenation of  $K$  and  $L$  equals the sum of the CP map with Kraus family  $K$  and the CP map with Kraus family  $L$ .

**Proof.** Both sides are compared pointwise (by extensionality). It follows from the extensionality for bilinear maps and the Choi matrix of a concatenation for Kraus families.

**Lean 4 source** `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
theorem ofKraus_append (K L : KrausFamily n m) :
  ofKraus (K ++ L) = ofKraus K + ofKraus L := by
  apply ext
  exact KrausFamily.choi_append K L
```

#### 4.4.177 Action on a matrix of a sum of a mapped family

**Statement.** For completely positive maps  $\Phi, \Psi$ , a matrix  $\rho$ : the action of the sum of  $\Phi$  and  $\Psi$  on  $\rho$  equals the sum of the action of  $\Phi$  on  $\rho$  and the action of  $\Psi$  on  $\rho$ .

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the action on a matrix of a map determined by a Kraus family, the action on a matrix of a concatenation for Kraus families and the extensionality for bilinear maps.

**Lean 4 source** `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
theorem applyMat_add_map (? ? : CPMMap n m)
  (? : Matrix (Fin n) (Fin n) ?) :
  applyMat (? + ?) ? = applyMat ? ? + applyMat ? ? := by
  have h :
    ? + ? = ofKraus (toKraus ? ++ toKraus ?) := by
    apply ext
    simp
  rw [h, applyMat_ofKraus, KrausFamily.applyMat_append]
  rfl
```

#### 4.4.178 Choi matrix of the scale nonnegativity for completely positive maps

**Statement.** For a real number  $c$ , a completely positive map  $\Phi$ : if  $0 \leq c$ , then  $(\text{scaleNonneg } c \text{ } hc \text{ } \Phi) . \text{choi}$  equals the Choi matrix of  $\Phi$  scaled by  $c$ .

**Proof.** By definition. Unfolding the Choi matrix turns the left-hand side,  $(\text{scaleNonneg } c \text{ } hc \text{ } \Phi) . \text{choi}$ , into the right-hand side, the Choi matrix of  $\Phi$  scaled by  $c$ ; the two sides are the same term.

**Lean 4 source** [QLambda/Domain/Presheaf/CPMapInstances.lean](#)

```
theorem choi_scaleNonneg (c : ?) (hc : 0 <= c) (? : CPMMap n m) :  
  (scaleNonneg c hc ?).choi = c * ?.choi :=  
  rfl
```

#### 4.4.179 Scale nonnegativity of zero for completely positive maps

**Statement.** For a completely positive map  $\Phi$ : the scale nonnegativity of  $\text{le\_rfl}$  and  $\Phi$  at 0 equals 0.

**Proof.** Both sides are compared pointwise (by extensionality). The goal is simplified using the extensionality for bilinear maps.

**Lean 4 source** [QLambda/Domain/Presheaf/CPMapInstances.lean](#)

```
theorem scaleNonneg_zero (? : CPMMap n m) :  
  scaleNonneg 0 le_rfl ? = 0 := by  
  apply ext  
  simp
```

#### 4.4.180 Scale nonnegativity of one for completely positive maps

**Statement.** For a completely positive map  $\Phi$ : the scale nonnegativity of  $\text{zero\_le\_one}$  and  $\Phi$  at 1 equals  $\Phi$ .

**Proof.** Both sides are compared pointwise (by extensionality). The goal is simplified using the extensionality for bilinear maps.

**Lean 4 source** [QLambda/Domain/Presheaf/CPMapInstances.lean](#)

```
theorem scaleNonneg_one (? : CPMMap n m) :  
  scaleNonneg 1 zero_le_one ? = ? := by  
  apply ext  
  simp
```

#### 4.4.181 Scale nonnegativity of a sum for completely positive maps

**Statement.** For a real number  $c$ , completely positive maps  $\Phi, \Psi$ : if  $0 \leq c$ , then the scale nonnegativity of  $c, hc$ , the sum of  $\Phi$  and  $\Psi$  equals the sum of the scale nonnegativity of  $c, hc, \Phi$  and the scale nonnegativity of  $c, hc, \Psi$ .

**Proof.** Both sides are compared pointwise (by extensionality). The goal is simplified using the definition of the scale nonnegativity, the usual algebraic identities and the extensionality for bilinear maps.

**Lean 4 source** [QLambda/Domain/Presheaf/CPMapInstances.lean](#)

```

theorem scaleNonneg_add (c : ?) (hc : 0 <= c) (?? : CPMMap n m) :
  scaleNonneg c hc (? + ?) =
    scaleNonneg c hc ? + scaleNonneg c hc ? := by
  apply ext
  simp [scaleNonneg, smul_add]

```

#### 4.4.182 Effect of a nonnegative multiple for completely positive maps

**Statement.** For a completely positive map  $\Phi$ : the effect of  $c \cdot \Phi$  equals the effect of  $\Phi$  scaled by  $c$ .

**Proof.** Both sides are compared pointwise (by extensionality). The goal is simplified using the definition of the effect and distributivity of multiplication over finite sums.

**Lean 4 source** [QLambda/Domain/Presheaf/CPMapInstances.lean](#)

```

theorem effect_nnsml (c : NNReal) (?? : CPMMap n m) :
  effect (c * ?) = (c : ?) * effect ? := by
  ext i j
  simp [effect, Finset.mul_sum]

```

#### 4.4.183 Continuous linear operator represented by the input effect

**Definition.** Continuous linear operator represented by the input effect.

**Construction.** Defined to be the passage to continuous linear functorial action of the passage to euclidean linear of  $\Phi$ .effect.

**Lean 4 source** [QLambda/Domain/Presheaf/CPMapInstances.lean](#)

```

noncomputable def effectCLM (?? : CPMMap n m) :
  EuclideanSpace ? (Fin n) -> L[?] EuclideanSpace ? (Fin n) :=
  LinearMap.toContinuousLinearMap (Matrix.toEuclideanLin ?.effect)

```

#### 4.4.184 Operator norm of the positive input effect

**Definition.** Operator norm of the positive input effect.

**Construction.** Defined to be  $\| \text{effectCLM } \Phi \|$ .

**Lean 4 source** [QLambda/Domain/Presheaf/CPMapInstances.lean](#)

```

noncomputable def effectNorm (?? : CPMMap n m) : ? :=
  ?effectCLM ??

```

#### 4.4.185 Nonnegativity of the effect norm

**Statement.** For a completely positive map  $\Phi$ :  $0 \leq \text{effectNorm } \Phi$ . Formally:  $0 \leq \text{effectNorm } \Phi$ .

**Proof.** The proof term combines the facts named in it directly.

**Lean 4 source** [QLambda/Domain/Presheaf/CPMapInstances.lean](#)

```

theorem effectNorm_nonneg (? : CPMMap n m) :
  0 <= effectNorm ? :=
  norm_nonneg _

```

#### 4.4.186 Effect CLM of a nonnegative multiple for completely positive maps

**Statement.** For a completely positive map  $\Phi$ : the effect CLM of  $c \cdot \Phi$  equals the effect CLM of  $\Phi$  scaled by  $c$ .

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the effect of a nonnegative multiple for completely positive maps, the usual algebraic identities and the extensionality for bilinear maps.

**Lean 4 source** `QLambda/Domain/Presheaf/CPMapInstances.lean`

```

theorem effectCLM_nnsml (c : NNReal) (? : CPMMap n m) :
  effectCLM (c * ?) = (c : ?) * effectCLM ? := by
  apply ContinuousLinearMap.ext
  intro x
  change Matrix.toEuclideanLin (effect (c * ?)) x = _
  rw [effect_nnsml, map_smul]
  rfl

```

#### 4.4.187 Effect norm of a nonnegative multiple for completely positive maps

**Statement.** For a completely positive map  $\Phi$ : the effect norm of  $c \cdot \Phi$  equals the product of  $c$  and the effect norm of  $\Phi$ .

**Proof.** The key step rewrites with the definition of the effect norm, the effect CLM of a nonnegative multiple for completely positive maps and the usual algebraic identities.

**Lean 4 source** `QLambda/Domain/Presheaf/CPMapInstances.lean`

```

theorem effectNorm_nnsml (c : NNReal) (? : CPMMap n m) :
  effectNorm (c * ?) = (c : ?) * effectNorm ? := by
  rw [effectNorm, effectCLM_nnsml, norm_smul]
  simp [effectNorm]

```

#### 4.4.188 The positive residual witnessing refinement of intrinsic CP maps

**Definition.** The positive residual witnessing refinement of intrinsic CP maps.

**Construction.** Constructed by supplying each component: Choi matrix and Choi positivity. The accompanying laws are verified from the definitions.

**Lean 4 source** `QLambda/Domain/Presheaf/CPMapInstances.lean`

```

def residualOfLE {? ? : CPMMap n m} (h : ? <= ?) : CPMMap n m where
  choi := ?.choi - ?.choi
  choi_pos := Matrix.le_iff.mp h

```

#### 4.4.189 Addition of the residual of order for completely positive maps

**Statement.** For completely positive maps  $\Phi, \Psi$ : if  $\Phi \leq \Psi$ , then the sum of  $\Phi$  and the residual of order of  $\Phi$  equals  $\Psi$ .

**Proof.** Both sides are compared pointwise (by extensionality). The goal is simplified using the definition of the residual of order and the extensionality for bilinear maps.

**Lean 4 source** `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
theorem add_residualOfLE {α β : CPMMap n m} (h : α ≤ β) :  
  α + residualOfLE h = β := by  
  apply ext  
  simp [residualOfLE]
```

#### 4.4.190 Choi order is exactly existence of a completely positive residual

**Statement.** Choi order is exactly existence of a completely positive residual. Formally:  $\Phi \leq \Psi \leftrightarrow \exists X : \text{CPMap } n \text{ } m, \Phi + X = \Psi$ .

**Proof.** Each component of the claim is established separately. The key step rewrites with the characterization of the order for subnormalized density matrices.

**Lean 4 source** `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
theorem le_iff_exists_add (α β : CPMMap n m) :  
  α ≤ β <-> exists X : CPMMap n m, α + X = β := by  
  constructor  
  * intro h  
    exact <residualOfLE h, add_residualOfLE h>  
  * rintro <?, rfl>  
    change ?.choi ≤ (α + β).choi  
    rw [Matrix.le_iff]  
    simpa using ?.choi_pos
```

#### 4.4.191 Identity CP map

**Definition.** Identity CP map.

**Construction.** Defined to be the CP map with Kraus family the identity on dimension  $n$ .

**Lean 4 source** `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
def identity (n : Nat) : CPMMap n n :=  
  ofKraus (KrausFamily.identity n)
```

#### 4.4.192 Effect of the identity for completely positive maps

**Statement.** For a natural number  $n$ :  $(\text{identity } n).\text{effect} = 1$ . Formally:  $(\text{identity } n).\text{effect} = 1$ .

**Proof.** The key step rewrites with the definition of the identity, the effect of a map determined by a Kraus family and the definition of the effect.

#### Lean 4 source `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
theorem effect_identity (n : Nat) : (identity n).effect = 1 := by
  rw [identity, effect_ofKraus]
  simp [KrausFamily.effect, KrausFamily.identity]
```

#### 4.4.193 Action on a matrix of an identity

**Statement.** For a matrix  $\rho$ : the action of the identity on dimension  $n$  on  $\rho$  equals  $\rho$ .

**Proof.** The goal is simplified using the definition of the identity.

#### Lean 4 source `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
theorem applyMat_identity (? : Matrix (Fin n) (Fin n) ?) :
  applyMat (identity n) ? = ? := by
  simp [identity]
```

#### 4.4.194 Sequential composition, written in diagrammatic order: composition of $\Psi$ and $\Phi$ first applies $\Phi$ , then $\Psi$

**Definition.** Sequential composition, written in diagrammatic order:  $\text{comp } \Psi \Phi$  first applies  $\Phi$ , then  $\Psi$ .

**Construction.** Defined to be the CP map with Kraus family the composite of  $\text{toKraus } \Psi$  after  $\text{toKraus } \Phi$ .

#### Lean 4 source `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
noncomputable def comp (? : CPMap m ?) (? : CPMap n m) : CPMap n ? :=
  ofKraus (KrausFamily.comp (toKraus ?) (toKraus ?))
```

#### 4.4.195 Action on a matrix of a composition

**Statement.** For completely positive maps  $\Psi, \Phi$ , a matrix  $\rho$ : the action of the composite of  $\Psi$  after  $\Phi$  on  $\rho$  equals the action of  $\Psi$  on the action of  $\Phi$  on  $\rho$ .

**Proof.** The key step rewrites with the definition of the composition, the action on a matrix of a map determined by a Kraus family and the action on a matrix of a composition.

#### Lean 4 source `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
theorem applyMat_comp (? : CPMap m ?) (? : CPMap n m)
  (? : Matrix (Fin n) (Fin n) ?) :
  applyMat (comp ? ?) ? = applyMat ? (applyMat ? ?) := by
  rw [comp, applyMat_ofKraus, KrausFamily.applyMat_comp]
  rfl
```

#### 4.4.196 Identity of a composite for completely positive maps

**Statement.** For a completely positive map  $\Phi$ : the composite of the identity on dimension  $m$  after  $\Phi$  equals  $\Phi$ .

**Proof.** The goal is simplified using the pointwise formula for the extensionality.

**Lean 4 source** `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
theorem identity_comp (? : CMap n m) : comp (identity m) ? = ? := by
  apply ext_apply
  intro ?
  simp
```

#### 4.4.197 Composition of the identity for completely positive maps

**Statement.** For a completely positive map  $\Phi$ : the composite of  $\Phi$  after the identity on dimension  $n$  equals  $\Phi$ .

**Proof.** The goal is simplified using the pointwise formula for the extensionality.

**Lean 4 source** `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
theorem comp_identity (? : CMap n m) : comp ? (identity n) = ? := by
  apply ext_apply
  intro ?
  simp
```

#### 4.4.198 Composition for completely positive maps is associative

**Statement.** For completely positive maps  $X, \Psi, \Phi$ : the composite of  $X$  after the composite of  $\Psi$  after  $\Phi$  equals the composite of the composite of  $X$  after  $\Psi$  after  $\Phi$ .

**Proof.** The goal is simplified using the pointwise formula for the extensionality.

**Lean 4 source** `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
theorem comp_assoc (? : CMap ? r) (? : CMap m ?) (? : CMap n m) :
  comp ? (comp ? ?) = comp (comp ? ?) ? := by
  apply ext_apply
  intro ?
  simp
```

#### 4.4.199 Composition of a sum for completely positive maps, in the left argument

**Statement.** For completely positive maps  $X, \Phi, \Psi$ : the composite of  $X$  after the sum of  $\Phi$  and  $\Psi$  equals the sum of the composite of  $X$  after  $\Phi$  and the composite of  $X$  after  $\Psi$ .

**Proof.** The goal is simplified using the action on a matrix of a sum for completely positive maps and the pointwise formula for the extensionality.

**Lean 4 source** `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
theorem comp_add_left (? : CMap m ?) (?? : CMap n m) :
  comp ? (? + ?) = comp ? ? + comp ? ? := by
  apply ext_apply
  intro ?
  simp [applyMat_add]
```



#### 4.4.200 Composition of a sum for completely positive maps, in the right argument

**Statement.** For completely positive maps  $\Phi, \Psi, X$ : the composite of the sum of  $\Phi$  and  $\Psi$  after  $X$  equals the sum of the composite of  $\Phi$  after  $X$  and the composite of  $\Psi$  after  $X$ .

**Proof.** The goal is simplified using the pointwise formula for the extensionality.

**Lean 4 source** `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
theorem comp_add_right (? ? : CMap m ?) (? : CMap n m) :
  comp (? + ?) ? = comp ? ? + comp ? ? := by
  apply ext_apply
  intro ?
  simp
```

#### 4.4.201 Composition of zero for completely positive maps, in the left argument

**Statement.** For a completely positive map  $\Phi$ : the composite of  $0$  after  $\Phi$  equals  $0$ .

**Proof.** The goal is simplified using the pointwise formula for the extensionality.

**Lean 4 source** `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
theorem comp_zero_left (? : CMap n m) :
  comp (0 : CMap m ?) ? = 0 := by
  apply ext_apply
  intro ?
  simp
```

#### 4.4.202 Composition of zero for completely positive maps, in the right argument

**Statement.** For a completely positive map  $\Psi$ : the composite of  $\Psi$  after  $0$  equals  $0$ .

**Proof.** The key step rewrites with the action on a matrix of a composition, the action on a matrix of zero for completely positive maps and the pointwise formula for the extensionality.

**Lean 4 source** `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
theorem comp_zero_right (? : CMap m ?) :
  comp ? (0 : CMap n m) = 0 := by
  apply ext_apply
  intro ?
  rw [applyMat_comp, applyMat_zero]
  simp using
    (applyMat_smul ? (0 : ?) (0 : Matrix (Fin m) (Fin m) ?))
```

#### 4.4.203 Coordinate formula for intrinsic Choi composition

**Statement.** Coordinate formula for intrinsic Choi composition. Formally:  $(\text{comp } \Psi \Phi).choi (a, i) (b, j) = \sum x, \sum y, \Psi.choi (a, x) (b, y) * \Phi.choi (x, i) (y, j)$ .

**Proof.** The key step rewrites with the definition of the composition, the Choi matrix of the map determined by a Kraus family, the coordinate formula for the Choi matrix of sequential composition and the Choi matrix of the Kraus presentation.

#### Lean 4 source `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
theorem choi_comp_apply (? : CPMMap m ?) (? : CPMMap n m)
  (a b : Fin ?) (i j : Fin n) :
  (comp ? ?).choi (a, i) (b, j) =
    ? x, ? y, ?.choi (a, x) (b, y) * ?.choi (x, i) (y, j) := by
  rw [comp, choi_ofKraus, KrausFamily.choi_comp_apply,
    choi_toKraus, choi_toKraus]
```

#### 4.4.204 Definition of the Choi tensor product equivalence of completely positive maps

**Definition.** The permutation that changes the Kronecker ordering  $(\text{output}_1, \text{input}_1, \text{output}_2, \text{input}_2)$  into the Choi ordering  $(\text{output}_1, \text{output}_2, \text{input}_1, \text{input}_2)$ .

**Construction.** Constructed by supplying each component: left inverse and right inverse. The accompanying laws are verified from the definitions.

#### Lean 4 source `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
def choiTensorEquiv (n m ? r : Nat) :
  ((Fin m × Fin n) × (Fin r × Fin ?)) ?
  (Fin (m * r) × Fin (n * ?)) where
toFun p :=
  (finProdFinEquiv (p.1.1, p.2.1),
   finProdFinEquiv (p.1.2, p.2.2))
invFun p :=
  (((finProdFinEquiv.symm p.1).1, (finProdFinEquiv.symm p.2).1),
   ((finProdFinEquiv.symm p.1).2, (finProdFinEquiv.symm p.2).2))
left_inv := by
  rintro <<i, j>, <k, l>>
  simp
right_inv := by
  rintro <i, j>
  apply Prod.ext
  * exact Equiv.apply_symm_apply finProdFinEquiv i
  * exact Equiv.apply_symm_apply finProdFinEquiv j
```

#### 4.4.205 Intrinsic tensor product of CP maps

**Definition.** Intrinsic tensor product of CP maps. It is defined directly on Choi matrices, with the canonical shuffle from Kronecker to Choi index order.

**Construction.** Constructed by supplying each component: Choi matrix and Choi positivity. The accompanying laws are verified from the definitions.

#### Lean 4 source `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
def tensor (? : CPMMap n m) (? : CPMMap ? r) :
  CPMMap (n * ?) (m * r) where
choi :=
  Matrix.reindex (choiTensorEquiv n m ? r) (choiTensorEquiv n m ? r)
  (?.choi ?? ?.choi)
choi_pos := by
  simpa [Matrix.reindex_apply] using
```

```
(?.choi_pos.kronecker ?.choi_pos).submatrix
(choiTensorEquiv n m ? r).symm
```

#### 4.4.206 Choi matrix of a tensor product for completely positive maps

**Statement.** For completely positive maps  $\Phi, \Psi$ :  $(\text{tensor } \Phi \ \Psi).choi$  equals the reindexing of  $\text{choiTensorEquiv } n \ m \ \ell \ r, \text{choiTensorEquiv } n \ m \ \ell \ r, \Phi.choi \otimes_k \Psi.choi$ .

**Proof.** By definition. Unfolding the Choi matrix turns the left-hand side,  $(\text{tensor } \Phi \ \Psi).choi$ , into the right-hand side, the reindexing of  $\text{choiTensorEquiv } n \ m \ \ell \ r, \text{choiTensorEquiv } n \ m \ \ell \ r, \Phi.choi \otimes_k \Psi.choi$ ; the two sides are the same term.

**Lean 4 source** `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
theorem choi_tensor (? : CPMap n m) (? : CPMap ? r) :
  (tensor ? ?).choi =
    Matrix.reindex (choiTensorEquiv n m ? r) (choiTensorEquiv n m ? r)
      (?.choi ?? ?.choi) :=
  rfl
```

#### 4.4.207 Congruence property of the tensor product

**Statement.** For completely positive maps  $\Phi, \Phi', \Psi, \Psi'$ : if  $\Phi = \Phi'$  and  $\Psi = \Psi'$ , then the tensor product of  $\Phi$  and  $\Psi$  equals the tensor product of  $\Phi'$  and  $\Psi'$ .

**Proof.** An equation between variables is used to substitute one for the other.

**Lean 4 source** `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
theorem tensor_congr {? ?' : CPMap n m} {? ?' : CPMap ? r}
  (h? : ? = ?') (h? : ? = ?') :
  tensor ? ? = tensor ?' ?' := by
  subst ?'
  subst ?'
  rfl
```

#### 4.4.208 Tensor is additive in its first CP-map argument

**Statement.** Tensor is additive in its first CP-map argument. Formally:  $\text{tensor } (\Phi + \Phi') \ \Psi = \text{tensor } \Phi \ \Psi + \text{tensor } \Phi' \ \Psi$ .

**Proof.** Both sides are compared pointwise (by extensionality). The goal is simplified using the definition of the tensor product, standard identities for matrices and the extensionality for bilinear maps.

**Lean 4 source** `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
theorem tensor_add_left (? ?' : CPMap n m) (? : CPMap ? r) :
  tensor (? + ?') ? = tensor ? ? + tensor ?' ? := by
  apply ext
  ext i j
  simp [tensor, Matrix.add_kronecker, Matrix.reindex_apply]
```

#### 4.4.209 Tensor is additive in its second CP-map argument

**Statement.** Tensor is additive in its second CP-map argument. Formally:  $\text{tensor } \Phi (\Psi + \Psi') = \text{tensor } \Phi \Psi + \text{tensor } \Phi \Psi'$ .

**Proof.** Both sides are compared pointwise (by extensionality). The goal is simplified using the definition of the tensor product, standard identities for matrices and the extensionality for bilinear maps.

**Lean 4 source** `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
theorem tensor_add_right (? : CPMAP n m) (? ?' : CPMAP ? r) :
  tensor ? (? + ?') = tensor ? ? + tensor ? ?' := by
  apply ext
  ext i j
  simp [tensor, Matrix.kronecker_add, Matrix.reindex_apply]
```

#### 4.4.210 Tensor product of zero for completely positive maps, in the left argument

**Statement.** For a completely positive map  $\Psi$ : the tensor product of 0 and  $\Psi$  equals 0.

**Proof.** Both sides are compared pointwise (by extensionality). The goal is simplified using the definition of the tensor product and the extensionality for bilinear maps.

**Lean 4 source** `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
theorem tensor_zero_left (? : CPMAP ? r) :
  tensor (0 : CPMAP n m) ? = 0 := by
  apply ext
  simp [tensor]
```

#### 4.4.211 Tensor product of zero for completely positive maps, in the right argument

**Statement.** For a completely positive map  $\Phi$ : the tensor product of  $\Phi$  and 0 equals 0.

**Proof.** Both sides are compared pointwise (by extensionality). The goal is simplified using the definition of the tensor product and the extensionality for bilinear maps.

**Lean 4 source** `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
theorem tensor_zero_right (? : CPMAP n m) :
  tensor ? (0 : CPMAP ? r) = 0 := by
  apply ext
  simp [tensor]
```

#### 4.4.212 The input effect of a tensor is the shuffled Kronecker product of the factor effects

**Statement.** The input effect of a tensor is the shuffled Kronecker product of the factor effects. Formally:  $\text{effect } (\text{tensor } \Phi \Psi) = \text{Matrix.reindex finProdFinEquiv finProdFinEquiv } (\text{effect } \Phi \otimes_k \text{effect } \Psi)$ .

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the Choi matrix of a tensor product for completely positive maps, standard identities for matrices, the definition of the Choi tensor product equivalence and standard identities for equivalences.

#### Lean 4 source `QLambda/Domain/Presheaf/CPMapInstances.lean`

```

theorem effect_tensor (? : CMap n m) (? : CMap ? r) :
  effect (tensor ? ?) =
    Matrix.reindex finProdFinEquiv finProdFinEquiv
      (effect ? ? effect ?) := by
  ext p q
  change (? a : Fin (m * r), (tensor ? ?).choi (a, q) (a, p)) = _
  rw [← (finProdFinEquiv : Fin m × Fin r → Fin (m * r)).sum_comp]
  simp only [choi_tensor, Matrix.reindex_apply, Matrix.submatrix_apply]
  dsimp [choiTensorEquiv]
  simp_rw [Equiv.symm_apply_apply]
  change (? a : Fin m × Fin r,
    ?.choi (a.1, (finProdFinEquiv.symm q).1)
      (a.1, (finProdFinEquiv.symm p).1) *
    ?.choi (a.2, (finProdFinEquiv.symm q).2)
      (a.2, (finProdFinEquiv.symm p).2)) = _
  rw [Fintype.sum_prod_type]
  change (? a : Fin m, ? b : Fin r,
    ?.choi (a, (finProdFinEquiv.symm q).1)
      (a, (finProdFinEquiv.symm p).1) *
    ?.choi (b, (finProdFinEquiv.symm q).2)
      (b, (finProdFinEquiv.symm p).2)) = _
  simp only [effect]
  rw [Finset.sum_mul]
  apply Finset.sum_congr rfl
  intro a _
  rw [Finset.mul_sum]

```

#### 4.4.213 The Kronecker product is at most one

**Statement.** For matrixes  $E, F$ : if  $E$  is positive semidefinite;  $E \leq 1$ ; and  $F \leq 1$ , then  $E \otimes_k F \leq 1$ .

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the characterization of the order for subnormalized density matrices and standard identities for matrices.

#### Lean 4 source `QLambda/Domain/Presheaf/CPMapInstances.lean`

```

private theorem kronecker_le_one
  {E : Matrix (Fin n) (Fin n) ?} {F : Matrix (Fin ?) (Fin ?) ?}
  (hEpos : E.PosSemidef) (hEle : E ≤ 1) (hFle : F ≤ 1) :
  E ?? F ≤ 1 := by
  rw [Matrix.le_iff]
  have hEq :
    (1 : Matrix (Fin n × Fin ?) (Fin n × Fin ?) ?) - E ?? F =
      (1 - E) ?? (1 : Matrix (Fin ?) (Fin ?) ?) +
      E ?? (1 - F) := by
  rw [← Matrix.one_kronecker_one]
  ext <i, k> <j, l>
  simp only [Matrix.sub_apply, Matrix.add_apply, Matrix.kronecker_apply]
  ring
  rw [hEq]
  exact
    ((Matrix.le_iff.mp hEle).kronecker Matrix.PosSemidef.one).add
      (hEpos.kronecker (Matrix.le_iff.mp hFle))

```

#### 4.4.214 The reindexing is at most one

**Statement.** For a matrix  $E$ : if  $E \leq 1$ , then  $\text{Matrix.reindex } e \ e \ E \leq 1$ .

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the characterization of the order for subnormalized density matrices and standard identities for matrices.

**Lean 4 source** `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
private theorem reindex_le_one {a c : Type} [DecidableEq a] [DecidableEq c]
  (e : a → c) {E : Matrix a a} (hE : E ≤ 1) :
  Matrix.reindex e e E ≤ 1 := by
  rw [Matrix.le_iff]
  have hp : (Matrix.submatrix (1 - E) e.symm e.symm).PosSemidef :=
    (Matrix.le_iff.mp hE).submatrix e.symm
  have heq :
    (1 : Matrix c c) - Matrix.reindex e e E =
      Matrix.submatrix (1 - E) e.symm e.symm := by
    ext i j
    simp [Matrix.reindex_apply, Matrix.one_apply]
  rw [heq]
  exact hp
```

#### 4.4.215 Tensoring two intrinsic TNI maps remains TNI

**Statement.** Tensoring two intrinsic TNI maps remains TNI. The proof uses the effect criterion, so its input may be entangled across the two factors. Formally:  $\rho.\text{PosSemidef} \rightarrow (\text{tr } (\text{applyMat } (\text{tensor } \Phi \ \Psi) \ \rho)).\text{re} \leq (\text{tr } \rho).\text{re}$ .

**Proof.** The key step rewrites with the fact that the input effect of a tensor is the shuffled Kronecker product of the factor effects, the effect bound implies trace non-increase on every positive input, the fact that the reindexing is at most one and the fact that the Kronecker product is at most one.

**Lean 4 source** `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
theorem trace_nonincreasing_tensor (? : CPMMap n m) (? : CPMMap ? r)
  (h? : forall ? : Matrix (Fin n) (Fin n) ?, ?.PosSemidef ->
    (Matrix.trace (applyMat ? ?)).re <= (Matrix.trace ?).re)
  (h? : forall ? : Matrix (Fin ?) (Fin ?) ?, ?.PosSemidef ->
    (Matrix.trace (applyMat ? ?)).re <= (Matrix.trace ?).re) :
  forall ? : Matrix (Fin (n * ?)) (Fin (n * ?)) ?, ?.PosSemidef ->
    (Matrix.trace (applyMat (tensor ? ?) ?)).re <=
      (Matrix.trace ?).re := by
  apply trace_nonincreasing_of_effect_le_one
  rw [effect_tensor]
  apply reindex_le_one
  exact kronecker_le_one ?.effect_posSemidef
    (effect_le_one_of_trace_nonincreasing ? h?)
    (effect_le_one_of_trace_nonincreasing ? h?)
```

#### 4.4.216 Tensor preserves sequential composition in both variables

**Statement.** Tensor preserves sequential composition in both variables. Formally:  $\text{tensor } (\text{comp } \Phi_2 \ \Phi_1) \ (\text{comp } \Psi_2 \ \Psi_1) = \text{comp } (\text{tensor } \Phi_2 \ \Psi_2) \ (\text{tensor } \Phi_1 \ \Psi_1)$ .

**Proof.** By case analysis on  $a_i$ . The key step rewrites with the Choi matrix of a tensor product for completely positive maps, standard identities for matrices, the definition of the Choi tensor product equivalence and the coordinate formula for intrinsic Choi composition. The remaining identity is a polynomial identity in a commutative ring.

#### Lean 4 source `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
theorem tensor_comp {p q : Nat}
  (?_2 : CPMMap m p) (?_1 : CPMMap n m)
  (?_2 : CPMMap r q) (?_1 : CPMMap ? r) :
  tensor (comp ?_2 ?_1) (comp ?_2 ?_1) =
    comp (tensor ?_2 ?_2) (tensor ?_1 ?_1) := by
  apply ext
  ext ai bj
  rcases ai with <a, i>
  rcases bj with <b, j>
  simp only [choi_tensor, Matrix.reindex_apply, Matrix.submatrix_apply]
  dsimp [choiTensorEquiv]
  rw [choi_comp_apply, choi_comp_apply, choi_comp_apply]
  simp_rw [
    <- (finProdFinEquiv : Fin m x Fin r ? Fin (m * r)).sum_comp]
  simp only [choi_tensor, Matrix.reindex_apply, Matrix.submatrix_apply]
  dsimp [choiTensorEquiv]
  simp_rw [Equiv.symm_apply_apply]
  rw [Fintype.sum_prod_type]
  simp_rw [Fintype.sum_prod_type]
  simp_rw [Finset.sum_mul, Finset.mul_sum]
  apply Finset.sum_congr rfl
  intro x _
  conv_rhs => rw [Finset.sum_comm]
  apply Finset.sum_congr rfl
  intro y _
  apply Finset.sum_congr rfl
  intro u _
  apply Finset.sum_congr rfl
  intro v _
  ring
```

#### 4.4.217 Tensor product of an identity

**Statement.** For natural numbers  $n, \ell$ : the tensor product of the identity on dimension  $n$  and the identity on dimension  $\ell$  equals the identity on dimension the product of  $n$  and  $\ell$ .

**Proof.** By case analysis on  $p$ . The goal is simplified using the Choi matrix of a tensor product for completely positive maps, standard identities for matrices, the definition of the Choi tensor product equivalence and the definition of the identity.

#### Lean 4 source `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
theorem tensor_identity (n ? : Nat) :
  tensor (identity n) (identity ?) = identity (n * ?) := by
  apply ext
  ext p q
  rcases p with <a, i>
```

```

rcases q with <b, j>
simp only [choi_tensor, Matrix.reindex_apply, Matrix.submatrix_apply]
dsimp [choiTensorEquiv, identity, KrausFamily.identity,
      KrausFamily.choi, KrausFamily.choiTerm]
simp only [List.map_cons, List.map_nil, List.sum_cons, List.sum_nil,
      add_zero]
have split {x y : Fin (n * ?)} (h : x != y) :
  (finProdFinEquiv.symm x).1 != (finProdFinEquiv.symm y).1 \ /
  (finProdFinEquiv.symm x).2 != (finProdFinEquiv.symm y).2 := by
  by_contra hxy
  push Not at hxy
  exact h (finProdFinEquiv.symm.injective (Prod.ext hxy.1 hxy.2))
by_cases hai : a = i
* subst i
  by_cases hbj : b = j
  * subst j
    simp [KrausFamily.choiTerm]
  * rcases split hbj with h | h
    * have h' : b.divNat != j.divNat := by simp using h
      simp [KrausFamily.choiTerm, Matrix.one_apply, h', hbj]
    * have h' : b.modNat != j.modNat := by simp using h
      simp [KrausFamily.choiTerm, Matrix.one_apply, h', hbj]
* rcases split hai with h | h
  * have h' : a.divNat != i.divNat := by simp using h
    simp [KrausFamily.choiTerm, Matrix.one_apply, h', hai]
  * have h' : a.modNat != i.modNat := by simp using h
    simp [KrausFamily.choiTerm, Matrix.one_apply, h', hai]

```

#### 4.4.218 Convert the intrinsic map to the existing presentation-independent antisymmetrization

**Definition.** Convert the intrinsic map to the existing presentation-independent antisymmetrization.

**Construction.** Defined to be the CP map with Kraus family the Kraus presentation of  $\Phi$ .

**Lean 4 source** [QLambda/Domain/Presheaf/CPMapInstances.lean](#)

```

noncomputable def toCompleted (? : CPMMap n m) : CompletedCP n m :=
  CompletedCP.ofKraus (toKraus ?)

```

#### 4.4.219 Convert the existing antisymmetrized Kraus semantics to its intrinsic Choi matrix

**Definition.** Convert the existing antisymmetrized Kraus semantics to its intrinsic Choi matrix.

**Construction.** Defined by an explicit formula built from the lift, the CP presentation, the map determined by a Kraus family and the Kraus operators.

**Lean 4 source** [QLambda/Domain/Presheaf/CPMapInstances.lean](#)

```

noncomputable def ofCompleted (? : CompletedCP n m) : CPMMap n m :=
  Quotient.lift
    (fun P : CPPresentation n m => ofKraus P.kraus)
    (fun P Q h => by
      apply ext
      apply le_antisymm
      * exact

```



```

      (KrausFamily.residualRefines_iff_choiRefines P.kraus Q.kraus).mp h.1
* exact
      (KrausFamily.residualRefines_iff_choiRefines Q.kraus P.kraus).mp h.2)
?

```

#### 4.4.220 Passage from a completed class of the map determined by a Kraus family

**Statement.** For the Kraus family  $K$ : the passage from a completed class of the CP map with Kraus family  $K$  equals the CP map with Kraus family  $K$ .

**Proof.** By definition. Unfolding the passage from a completed class turns the left-hand side, the passage from a completed class of the CP map with Kraus family  $K$ , into the right-hand side, the CP map with Kraus family  $K$ ; the two sides are the same term.

##### Lean 4 source `QLambda/Domain/Presheaf/CPMapInstances.lean`

```

theorem ofCompleted_ofKraus (K : KrausFamily n m) :
  ofCompleted (CompletedCP.ofKraus K) = ofKraus K :=
  rfl

```

#### 4.4.221 Passage from a completed class of a passage to the completed class

**Statement.** For a completely positive map  $\Phi$ : the passage from a completed class of the passage to the completed class of  $\Phi$  equals  $\Phi$ .

**Proof.** The goal is simplified using the definition of the passage to the completed class.

##### Lean 4 source `QLambda/Domain/Presheaf/CPMapInstances.lean`

```

theorem ofCompleted_toCompleted (? : CPMAP n m) :
  ofCompleted (toCompleted ?) = ? := by
  simp [toCompleted]

```

#### 4.4.222 Passage to the completed class of a passage from a completed class

**Statement.** The passage to the completed class of the passage from a completed class of  $\Phi$  equals  $\Phi$ .

**Proof.** The argument proceeds by induction. It follows from the fact that the map determined by a Kraus family respects semantic equality, the equality of Choi matrices implies extensional equality of the represented operator-sum maps and the Choi matrix of the Kraus presentation.

##### Lean 4 source `QLambda/Domain/Presheaf/CPMapInstances.lean`

```

theorem toCompleted_ofCompleted (? : CompletedCP n m) :
  toCompleted (ofCompleted ?) = ? := by
  induction ? using Antisymmetrization.induction_on with
  | _ P =>
    change
      CompletedCP.ofKraus (toKraus (ofKraus P.kraus)) =
        CompletedCP.ofKraus P.kraus
    apply CompletedCP.ofKraus_eq_of_semEq
    apply KrausFamily.semEq_of_choi_eq
    exact choi_toKraus (ofKraus P.kraus)

```

#### 4.4.223 Passage to the completed class of a map determined by a Kraus family

**Statement.** For the Kraus family  $K$ : the passage to the completed class of the CP map with Kraus family  $K$  equals the CP map with Kraus family  $K$ .

**Proof.** The key step rewrites with the passage from a completed class of the map determined by a Kraus family and the passage to the completed class of a passage from a completed class.

**Lean 4 source** `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
theorem toCompleted_ofKraus (K : KrausFamily n m) :
  toCompleted (ofKraus K) = CompletedCP.ofKraus K := by
  rw [ <- ofCompleted_ofKraus K, toCompleted_ofCompleted]
```

#### 4.4.224 Intrinsic Choi maps are equivalent to the existing completed Kraus semantics

**Definition.** Intrinsic Choi maps are equivalent to the existing completed Kraus semantics.

**Construction.** Constructed by supplying each component: passage to fun, inverse fun, left inverse and right inverse. The accompanying laws are verified from the definitions.

**Lean 4 source** `QLambda/Domain/Presheaf/CPMapInstances.lean`

```
noncomputable def completedEquiv : CPMMap n m ? CompletedCP n m where
  toFun := toCompleted
  invFun := ofCompleted
  left_inv := ofCompleted_toCompleted
  right_inv := toCompleted_ofCompleted
```

#### 4.4.225 Exact, non-idempotence-assuming witness that the canonical continuation map of one module is invertible

**Definition.** Exact, non-idempotence-assuming witness that the canonical continuation map of one module is invertible.

**Construction.** An element consists of `inv`, subject to the laws `hom_inv` and `inv_hom`.

**Lean 4 source** `QLambda/Domain/Presheaf/CanonicalReflexivity.lean`

```
structure CanonicalReflexivity (M : Module) where
  inv : Hom (DayNegation.neg (DayNegation.neg M)) M
  hom_inv :
    Hom.comp (DayNegation.unit M) inv =
      Hom.id (DayNegation.neg (DayNegation.neg M))
  inv_hom :
    Hom.comp inv (DayNegation.unit M) = Hom.id M
```

#### 4.4.226 Package a canonical-reflexivity witness as an isomorphism

**Definition.** Package a canonical-reflexivity witness as an isomorphism.

**Construction.** Constructed by supplying each component: morphism, inverse, morphism inverse and inverse morphism. The accompanying laws are verified from the definitions.

#### Lean 4 source `QLambda/Domain/Presheaf/CanonicalReflexivity.lean`

```
noncomputable def CanonicalReflexivity.iso {M : Module}
  (h : CanonicalReflexivity M) :
  Iso M (DayNegation.neg (DayNegation.neg M)) where
  hom := DayNegation.unit M
  inv := h.inv
  hom_inv := h.hom_inv
  inv_hom := h.inv_hom
```

#### 4.4.227 The exact finite-dimensional biorthogonality statement still required to put a representable in the classical category

**Definition.** The exact finite-dimensional biorthogonality statement still required to put a representable in the classical category.

**Construction.** Defined to be the canonical reflexivity witness of the representable module of  $A$ .

#### Lean 4 source `QLambda/Domain/Presheaf/CanonicalReflexivity.lean`

```
abbrev RepresentableReflexivity (A : Nat) :=
  CanonicalReflexivity (representable A)
```

#### 4.4.228 A small ordinary-category interface used for the concrete full biorthogonal subcategory

**Definition.** A small ordinary-category interface used for the concrete full biorthogonal subcategory.

**Construction.** An element consists of `Obj`, `id`, `comp` and `assoc`, subject to the laws `hom`, `id_comp` and `comp_id`.

#### Lean 4 source `QLambda/Domain/Presheaf/CategoryPresentation.lean`

```
structure CategoryPresentation where
  Obj : Type (u + 1)
  hom : Obj -> Obj -> Type u
  id : {A : Obj} -> hom A A
  comp : {A B C : Obj} -> hom B C -> hom A B -> hom A C
  id_comp : forall {A B : Obj} (f : hom A B), comp id f = f
  comp_id : forall {A B : Obj} (f : hom A B), comp f id = f
  assoc :
    forall {A B C D : Obj} (h : hom C D) (g : hom B C) (f : hom A B),
      comp (comp h g) f = comp h (comp g f)
```

#### 4.4.229 Transport canonical reflexivity along a module isomorphism

**Definition.** Transport canonical reflexivity along a module isomorphism.

**Construction.** Constructed by supplying each component: inverse, inverse morphism and morphism inverse. The accompanying laws are verified from the definitions.

#### Lean 4 source `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```

noncomputable def CanonicalReflexivity.transport {M N : Module}
  (e : Iso M N) (h : CanonicalReflexivity M) :
  CanonicalReflexivity N where
inv :=
  Hom.comp e.hom
  (Hom.comp h.inv (DayNegation.map (DayNegation.map e.inv)))
inv_hom := by
  apply Hom.ext
  intro n x
  have hn1 := congrArg (fun f : Hom _ _ => f.app n x)
    (DayNegation.unit_natural e.inv)
  change
    ((DayNegation.unit M).app n (e.inv.app n x)) =
      ((DayNegation.map (DayNegation.map e.inv)).app n
        ((DayNegation.unit N).app n x)) at hn1
  have h2 := congrArg (fun z => e.hom.app n (h.inv.app n z)) hn1.symm
  have h3 := congrArg (e.hom.app n
    (congrArg (fun f : Hom M M => f.app n (e.inv.app n x)) h.inv_hom))
  have h4 := congrArg (fun f : Hom N N => f.app n x) e.hom_inv
  exact (h2.trans h3).trans h4
hom_inv := by
  apply Hom.ext
  intro n x
  have hn1 := congrArg
    (fun f : Hom _ _ => f.app n
      (h.inv.app n ((DayNegation.map (DayNegation.map e.inv)).app n x)))
    (DayNegation.unit_natural e.hom)
  change
    ((DayNegation.unit N).app n
      (e.hom.app n
        (h.inv.app n
          ((DayNegation.map (DayNegation.map e.inv)).app n x)))) =
      ((DayNegation.map (DayNegation.map e.hom)).app n
        ((DayNegation.unit M).app n
          (h.inv.app n
            ((DayNegation.map (DayNegation.map e.inv)).app n x)))) at hn1
  have h2 := congrArg
    (fun z => (DayNegation.map (DayNegation.map e.hom)).app n z)
    (congrArg (fun f : Hom _ _ => f.app n
      ((DayNegation.map (DayNegation.map e.inv)).app n x)) h.hom_inv)
  have h3 :
    Hom.comp (DayNegation.map (DayNegation.map e.hom))
      (DayNegation.map (DayNegation.map e.inv)) =
      Hom.id (DayNegation.neg (DayNegation.neg N)) := by
    rw [← DayNegation.map_comp, ← DayNegation.map_comp, e.hom_inv,
      DayNegation.map_id, DayNegation.map_id]
  have h3app := congrArg (fun f : Hom _ _ => f.app n x) h3
  exact hn1.trans (h2.trans h3app)

```

#### 4.4.230 Transport a pseudo-basis along a module isomorphism

**Definition.** Transport a pseudo-basis along a module isomorphism.

**Construction.** Constructed by supplying each component: index, countable index, coefficient, ket, bra and resolves. The accompanying laws are verified from the definitions.

#### Lean 4 source `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```
noncomputable def PseudoBasis.transport {M N : Module}
  (e : Iso M N) (b : PseudoBasis M) : PseudoBasis N where
  Index := b.Index
  countableIndex := b.countableIndex
  coeff := b.coeff
  ket := fun i => Hom.comp e.hom (b.ket i)
  bra := fun i => Hom.comp (b.bra i) e.inv
  resolves := by
    have h := b.resolves
    have hreindex :
      Hom.HasSum
      (fun i => Hom.comp e.hom
        (Hom.comp (Hom.comp (b.ket i) (b.bra i)) e.inv))
        (Hom.comp e.hom (Hom.comp (Hom.id M) e.inv)) :=
      Hom.hasSum_comp_left e.hom (Hom.hasSum_comp_right e.inv h)
    simp only [Hom.comp_assoc, Hom.id_comp, e.hom_inv] at hreindex
    convert hreindex using 1
  funext i
  simp only [Hom.comp_assoc]
```

#### 4.4.231 Extract the underlying canonical reflexivity witness from a classical object

**Definition.** Extract the underlying `CanonicalReflexivity` witness from a classical object.

**Construction.** Constructed by supplying each component: inverse, morphism inverse and inverse morphism. The accompanying laws are verified from the definitions.

#### Lean 4 source `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```
noncomputable def ClassicalObject.toCanonicalReflexivity
  (C : ClassicalObject DayNegation.data) :
  CanonicalReflexivity C.module where
  inv := by
    simp [DayNegation.data, NegationData.doubleDual] using C.reflexive.inv
  hom_inv := by
    have h := C.reflexive.hom_inv
    have hc : C.reflexive.hom = DayNegation.unit C.module := C.canonical
    simp only [DayNegation.data, NegationData.doubleDual] at h |-
    convert h
    * exact hc.symm
    * rfl
  inv_hom := by
    have h := C.reflexive.inv_hom
    have hc : C.reflexive.hom = DayNegation.unit C.module := C.canonical
    simp only [DayNegation.data, NegationData.doubleDual] at h |-
    convert h
    * rfl
    * exact hc.symm
```

#### 4.4.232 Package a module with an exhibited basis and reflexivity as a classical object

**Definition.** Package a module with an exhibited basis and reflexivity as a classical object.

**Construction.** Constructed by supplying each component: module, basis, reflexive and canonical. The accompanying laws are verified from the definitions.

**Lean 4 source** `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```
noncomputable def classicalObjectOf
  (M : Module) (b : PseudoBasis M) (h : CanonicalReflexivity M) :
  ClassicalObject DayNegation.data where
  module := M
  basis := b
  reflexive := h.iso
  canonical := rfl
```

#### 4.4.233 Rebuild a classical object on an isomorphic module

**Definition.** Rebuild a classical object on an isomorphic module.

**Construction.** Defined to be the classical object of  $M$ , the transport of  $e$  and  $C.basis$ , the transport of  $e$  and  $C.toCanonicalReflexivity$ .

**Lean 4 source** `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```
noncomputable def ClassicalObject.ofIso
  (C : ClassicalObject DayNegation.data) {M : Module}
  (e : Iso C.module M) :
  ClassicalObject DayNegation.data :=
  classicalObjectOf M (PseudoBasis.transport e C.basis)
  (CanonicalReflexivity.transport e C.toCanonicalReflexivity)
```

#### 4.4.234 Flip an isomorphism

**Definition.** Flip an isomorphism.

**Construction.** Constructed by supplying each component: morphism, inverse, morphism inverse and inverse morphism. The accompanying laws are verified from the definitions.

**Lean 4 source** `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```
noncomputable def Iso.symm {M N : Module} (e : Iso M N) : Iso N M where
  hom := e.inv
  inv := e.hom
  hom_inv := e.inv_hom
  inv_hom := e.hom_inv

/ -! ## Source primitives -/
```

#### 4.4.235 Tensor unit $\mathbf{I} = \mathbf{y}(1)$ as a classical object

**Definition.** Tensor unit  $\mathbf{I} = \mathbf{y}(1)$  as a classical object.

**Construction.** Defined to be the representable classical object of the by of decide at 1.

**Lean 4 source** `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```

noncomputable def unitClassicalObject :
  ClassicalObject DayNegation.data :=
  representableClassicalObject 1 (by decide)

```

#### 4.4.236 Qubit object $y(2)$ as a classical object

**Definition.** Qubit object  $y(2)$  as a classical object. Distinct from the classical bit: arXiv has  $\llbracket \text{Qubit} \rrbracket = y(2)$  and  $\llbracket \text{Bit} \rrbracket = I \oplus I$ .

**Construction.** Defined to be the representable classical object of the by of decide at 2.

**Lean 4 source** [QLambda/Domain/Presheaf/ClassicalMonoidal.lean](#)

```

noncomputable def qubitClassicalObject :
  ClassicalObject DayNegation.data :=
  representableClassicalObject 2 (by decide)

/-! ## Representable classical tensor -/

```

#### 4.4.237 Day tensor of positive representables is classical via $y(A) \otimes y(B) \cong y(A*B)$

**Definition.** Day tensor of positive representables is classical via  $y(A) \otimes y(B) \cong y(A*B)$ .

**Construction.** Defined by an explicit formula built from the representable classical object, the Day tensor product representable isomorphism, the construction from a module isomorphism and the symmetry.

**Lean 4 source** [QLambda/Domain/Presheaf/ClassicalMonoidal.lean](#)

```

noncomputable def classicalRepresentableTensor
  (A B : Nat) (hA : 0 < A) (hB : 0 < B) :
  ClassicalObject DayNegation.data :=
  let R := representableClassicalObject (A * B) (Nat.mul_pos hA hB)
  let e := dayTensorRepresentableIso A B
  ClassicalObject.ofIso R e.symm

```

#### 4.4.238 Classical representable tensor product of the module

**Statement.** For natural numbers A, B: if  $0 < A$  and  $0 < B$ , then  $(\text{classicalRepresentableTensor } A \ B \ hA \ hB).module$  equals the Day tensor product of the representable module of A and the representable module of B.

**Proof.** By definition. Unfolding the module turns the left-hand side,  $(\text{classicalRepresentableTensor } A \ B \ hA \ hB).module$ , into the right-hand side, the Day tensor product of the representable module of A and the representable module of B; the two sides are the same term.

**Lean 4 source** [QLambda/Domain/Presheaf/ClassicalMonoidal.lean](#)

```

theorem classicalRepresentableTensor_module
  (A B : Nat) (hA : 0 < A) (hB : 0 < B) :
  (classicalRepresentableTensor A B hA hB).module =
  dayTensor (representable A) (representable B) :=
  rfl

```

#### 4.4.239 Underlying comparison $\mathbf{y}(A) \otimes \mathbf{y}(B) \rightarrow \mathbf{y}(A*B)$

**Definition.** Underlying comparison  $\mathbf{y}(A) \otimes \mathbf{y}(B) \rightarrow \mathbf{y}(A*B)$ .

**Construction.** Defined to be `(dayTensorRepresentableIso A B).hom`.

**Lean 4 source** `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```
noncomputable def classicalRepresentableTensor_to_representable
  (A B : Nat) (hA : 0 < A) (hB : 0 < B) :
  ClassicalObject.Hom
  (classicalRepresentableTensor A B hA hB)
  (representableClassicalObject (A * B) (Nat.mul_pos hA hB)) :=
  (dayTensorRepresentableIso A B).hom
```

#### 4.4.240 Inverse comparison $\mathbf{y}(A*B) \rightarrow \mathbf{y}(A) \otimes \mathbf{y}(B)$

**Definition.** Inverse comparison  $\mathbf{y}(A*B) \rightarrow \mathbf{y}(A) \otimes \mathbf{y}(B)$ .

**Construction.** Defined to be `(dayTensorRepresentableIso A B).inv`.

**Lean 4 source** `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```
noncomputable def classicalRepresentableTensor_of_representable
  (A B : Nat) (hA : 0 < A) (hB : 0 < B) :
  ClassicalObject.Hom
  (representableClassicalObject (A * B) (Nat.mul_pos hA hB))
  (classicalRepresentableTensor A B hA hB) :=
  (dayTensorRepresentableIso A B).inv
```

`/-! ## Double-dual reflexivity -/`

#### 4.4.241 If $\neg X$ is reflexive, then so is $\neg\neg X$

**Definition.** If  $\neg X$  is reflexive, then so is  $\neg\neg X$ .

**Construction.** Constructed by supplying each component: inverse, inverse morphism and morphism inverse. The accompanying laws are verified from the definitions.

**Lean 4 source** `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```
noncomputable def doubleDualReflexivity_of_neg
  {X : Module} (h : CanonicalReflexivity (DayNegation.neg X)) :
  CanonicalReflexivity (DayNegation.neg (DayNegation.neg X)) where
  inv := DayNegation.map (DayNegation.unit (DayNegation.neg X))
  inv_hom := DayNegation.map_unit_unit_neg (DayNegation.neg X)
  hom_inv := by
    have hmap :
      Hom.comp (DayNegation.map h.inv)
        (DayNegation.map (DayNegation.unit (DayNegation.neg X))) =
      Hom.id
      (DayNegation.neg
        (DayNegation.neg (DayNegation.neg (DayNegation.neg X)))) := by
      rw [ <- DayNegation.map_comp, h.hom_inv, DayNegation.map_id ]
    have hre := DayNegation.map_unit_unit_neg (DayNegation.neg X)
    have hunit :
```



```

DayNegation.unit (DayNegation.neg (DayNegation.neg X)) =
  DayNegation.map h.inv := by
calc
DayNegation.unit (DayNegation.neg (DayNegation.neg X))
  = Hom.comp
    (Hom.comp (DayNegation.map h.inv)
      (DayNegation.map (DayNegation.unit (DayNegation.neg X))))
    (DayNegation.unit (DayNegation.neg (DayNegation.neg X))) := by
  rw [hmap, Hom.id_comp]
_ = Hom.comp (DayNegation.map h.inv)
  (Hom.comp (DayNegation.map (DayNegation.unit (DayNegation.neg X)))
    (DayNegation.unit (DayNegation.neg (DayNegation.neg X)))) := by
  rw [Hom.comp_assoc]
_ = Hom.comp (DayNegation.map h.inv)
  (Hom.id (DayNegation.neg (DayNegation.neg X))) := by
  rw [hrel]
_ = DayNegation.map h.inv := Hom.comp_id _
change Hom.comp (DayNegation.unit (DayNegation.neg (DayNegation.neg X)))
  (DayNegation.map (DayNegation.unit (DayNegation.neg X))) =
  Hom.id _
rw [hunit]
exact hmap

```

#### 4.4.242 Negation of a classical object is canonically reflexive (triple negation)

**Definition.** Negation of a classical object is canonically reflexive (triple negation).

**Construction.** Constructed by supplying each component: inverse, inverse morphism and morphism inverse. The accompanying laws are verified from the definitions.

**Lean 4 source** `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```

noncomputable def classicalNegReflexivity
  (C : ClassicalObject DayNegation.data) :
  CanonicalReflexivity (DayNegation.neg C.module) where
  inv := DayNegation.map (DayNegation.unit C.module)
  inv_hom := DayNegation.map_unit_unit_neg C.module
  hom_inv := by
    have hC := C.toCanonicalReflexivity
    have hmap :
      Hom.comp (DayNegation.map hC.inv)
        (DayNegation.map (DayNegation.unit C.module)) =
      Hom.id (DayNegation.neg (DayNegation.neg (DayNegation.neg C.module))) := by
      rw [ <- DayNegation.map_comp, hC.hom_inv, DayNegation.map_id]
    have hre := DayNegation.map_unit_unit_neg C.module
    have hunit :
      DayNegation.unit (DayNegation.neg C.module) =
      DayNegation.map hC.inv := by
  calc
  DayNegation.unit (DayNegation.neg C.module)
    = Hom.comp
      (Hom.comp (DayNegation.map hC.inv)
        (DayNegation.map (DayNegation.unit C.module)))
      (DayNegation.unit (DayNegation.neg C.module)) := by
    rw [hmap, Hom.id_comp]

```

```

_ = Hom.comp (DayNegation.map hC.inv)
  (Hom.comp (DayNegation.map (DayNegation.unit C.module))
    (DayNegation.unit (DayNegation.neg C.module))) := by
  rw [Hom.comp_assoc]
_ = Hom.comp (DayNegation.map hC.inv)
  (Hom.id (DayNegation.neg C.module)) := by rw [hre]
_ = DayNegation.map hC.inv := Hom.comp_id _
change Hom.comp (DayNegation.unit (DayNegation.neg C.module))
  (DayNegation.map (DayNegation.unit C.module)) =
  Hom.id _
rw [hunit]
exact hmap

```

#### 4.4.243 Double dual of a classical module is reflexive

**Definition.** Double dual of a classical module is reflexive.

**Construction.** Defined to be the double dual reflexivity of negation of the classical negation reflexivity of  $C$ .

**Lean 4 source** [QLambda/Domain/Presheaf/ClassicalMonoidal.lean](#)

```

noncomputable def classicalDoubleDualReflexivity
  (C : ClassicalObject DayNegation.data) :
  CanonicalReflexivity (DayNegation.neg (DayNegation.neg C.module)) :=
  doubleDualReflexivity_of_neg (classicalNegReflexivity C)

```

#### 4.4.244 The double dual of a classical object, as a classical object

**Definition.** The double dual of a classical object, as a classical object.

**Construction.** Defined by an explicit formula built from the classical object, the negation, the module and the transport.

**Lean 4 source** [QLambda/Domain/Presheaf/ClassicalMonoidal.lean](#)

```

noncomputable def classicalDoubleDualObject
  (C : ClassicalObject DayNegation.data) :
  ClassicalObject DayNegation.data :=
  classicalObjectOf
    (DayNegation.neg (DayNegation.neg C.module))
    (PseudoBasis.transport
      { hom := DayNegation.unit C.module
        inv := C.toCanonicalReflexivity.inv
        hom_inv := C.toCanonicalReflexivity.hom_inv
        inv_hom := C.toCanonicalReflexivity.inv_hom }
      C.basis)
    (classicalDoubleDualReflexivity C)

/-! ## Double-dualized classical tensor (proved cases) -/

```

#### 4.4.245 $\text{Iso } M \otimes N \cong \neg\neg M \otimes \neg\neg N$ for classical $M, N$

**Definition.**  $\text{Iso } M \otimes N \cong \neg\neg M \otimes \neg\neg N$  for classical  $M, N$ .

**Construction.** Constructed by supplying each component: morphism, inverse, morphism inverse and inverse morphism. The accompanying laws are verified from the definitions.

**Lean 4 source** `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```
noncomputable def dayTensorDoubleDualIso
  (M N : ClassicalObject DayNegation.data) :
  Iso (dayTensor M.module N.module)
    (dayTensor
      (DayNegation.neg (DayNegation.neg M.module))
      (DayNegation.neg (DayNegation.neg N.module))) where
hom := DayTensor.map (DayNegation.unit M.module) (DayNegation.unit N.module)
inv :=
  DayTensor.map M.toCanonicalReflexivity.inv N.toCanonicalReflexivity.inv
hom_inv := by
  rw [ <- DayTensor.map_comp, M.toCanonicalReflexivity.hom_inv,
    N.toCanonicalReflexivity.hom_inv, DayTensor.map_id]
inv_hom := by
  rw [ <- DayTensor.map_comp, M.toCanonicalReflexivity.inv_hom,
    N.toCanonicalReflexivity.inv_hom, DayTensor.map_id]
```

#### 4.4.246 Definition of the classical tensor product superoperator module

**Definition.** Module of the  $\neg\neg$  packaging  $\neg\neg(M \otimes N)$  (not itself a `ClassicalObject` without a reflexivity witness for the raw tensor or its double dual).

**Construction.** Defined to be the negation of the negation of `dayTensor M.module N.module`.

**Lean 4 source** `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```
noncomputable abbrev classicalTensorModule
  (M N : ClassicalObject DayNegation.data) : Module :=
  DayNegation.neg (DayNegation.neg (dayTensor M.module N.module))
```

#### 4.4.247 Classical $\neg\neg$ tensor from an exhibited classicality witness for the raw Day tensor

**Definition.** Classical  $\neg\neg$  tensor from an exhibited classicality witness for the raw Day tensor.

**Construction.** Defined to be the classical double dual object of the classical object of  $\_, b, h$ .

**Lean 4 source** `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```
noncomputable def classicalTensorOf
  (M N : ClassicalObject DayNegation.data)
  (b : PseudoBasis (dayTensor M.module N.module))
  (h : CanonicalReflexivity (dayTensor M.module N.module)) :
  ClassicalObject DayNegation.data :=
  classicalDoubleDualObject (classicalObjectOf _ b h)
```

#### 4.4.248 Classical $\neg\neg$ tensor of positive representables

**Definition.** Classical  $\neg\neg$  tensor of positive representables. Since  $\underline{y}(A) \otimes \underline{y}(B)$  is already classical (`classicalRepresentableTensor`), this is the double dual of that classical object — a proved `ClassicalObject` exhibiting the  $\neg\neg$  packaging on the representable fragment.

**Construction.** Defined by an explicit formula built from the classical representable tensor product, the classical tensor product, the representable classical object and the passage to canonical reflexivity witness.

**Lean 4 source** `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```
noncomputable def classicalTensorRepresentable
  (A B : Nat) (hA : 0 < A) (hB : 0 < B) :
  ClassicalObject DayNegation.data :=
  let T := classicalRepresentableTensor A B hA hB
  classicalTensorOf
    (representableClassicalObject A hA)
    (representableClassicalObject B hB)
    T.basis T.toCanonicalReflexivity

/-! ## Pointwise additive product scaffolding -/
```

#### 4.4.249 Left injection into a pointwise additive product

**Definition.** Left injection into a pointwise additive product.

**Construction.** Defined to be the additive pairing of the identity of  $M$  at  $0$ .

**Lean 4 source** `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```
noncomputable def additiveInl (M N : Module) :
  Hom M (additiveProduct M N) :=
  additivePair (Hom.id M) 0
```

#### 4.4.250 Right injection into a pointwise additive product

**Definition.** Right injection into a pointwise additive product.

**Construction.** Defined to be the additive pairing of the identity of  $N$  at  $0$ .

**Lean 4 source** `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```
noncomputable def additiveInr (M N : Module) :
  Hom N (additiveProduct M N) :=
  additivePair 0 (Hom.id N)
```

#### 4.4.251 First additive projection of the left injection

**Statement.** For superoperator modules  $M, N$ : the composite of the first additive projection of  $M$  and  $N$  after the additive left injection of  $M$  and  $N$  equals the identity of  $M$ .

**Proof.** The goal is simplified using the definition of the additive left injection.

**Lean 4 source** `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```

theorem additiveFst_inl (M N : Module) :
  Hom.comp (additiveFst M N) (additiveInl M N) = Hom.id M := by
  simp [additiveInl]

```

#### 4.4.252 Second additive projection of the right injection

**Statement.** For superoperator modules  $M, N$ : the composite of the second additive projection of  $M$  and  $N$  after the additive right injection of  $M$  and  $N$  equals the identity of  $N$ .

**Proof.** The goal is simplified using the definition of the additive right injection.

**Lean 4 source** [QLambda/Domain/Presheaf/ClassicalMonoidal.lean](#)

```

theorem additiveSnd_inr (M N : Module) :
  Hom.comp (additiveSnd M N) (additiveInr M N) = Hom.id N := by
  simp [additiveInr]

```

#### 4.4.253 Second additive projection of the left injection

**Statement.** For superoperator modules  $M, N$ : the composite of the second additive projection of  $M$  and  $N$  after the additive left injection of  $M$  and  $N$  equals  $0$ .

**Proof.** The goal is simplified using the definition of the additive left injection.

**Lean 4 source** [QLambda/Domain/Presheaf/ClassicalMonoidal.lean](#)

```

theorem additiveSnd_inl (M N : Module) :
  Hom.comp (additiveSnd M N) (additiveInl M N) = 0 := by
  simp [additiveInl]

```

#### 4.4.254 First additive projection of the right injection

**Statement.** For superoperator modules  $M, N$ : the composite of the first additive projection of  $M$  and  $N$  after the additive right injection of  $M$  and  $N$  equals  $0$ .

**Proof.** The goal is simplified using the definition of the additive right injection.

**Lean 4 source** [QLambda/Domain/Presheaf/ClassicalMonoidal.lean](#)

```

theorem additiveFst_inr (M N : Module) :
  Hom.comp (additiveFst M N) (additiveInr M N) = 0 := by
  simp [additiveInr]

```

#### 4.4.255 Candidate inverse for pointwise-product reflexivity

**Definition.** Candidate inverse for pointwise-product reflexivity.

**Construction.** Defined by an explicit formula built from the additive pairing, the composition, the inverse and the functorial action.

**Lean 4 source** [QLambda/Domain/Presheaf/ClassicalMonoidal.lean](#)

```

noncomputable def additiveProductDoubleDualInv
  {M N : Module}
  (hM : CanonicalReflexivity M) (hN : CanonicalReflexivity N) :
  Hom (DayNegation.neg (DayNegation.neg (additiveProduct M N)))
    (additiveProduct M N) :=
  additivePair
    (Hom.comp hM.inv
      (DayNegation.map (DayNegation.map (additiveFst M N))))
    (Hom.comp hN.inv
      (DayNegation.map (DayNegation.map (additiveSnd M N))))

```

#### 4.4.256 One triangle of product reflexivity: $\text{inv} \circ \text{unit} = \text{id}$

**Statement.** One triangle of product reflexivity:  $\text{inv} \circ \text{unit} = \text{id}$ . The reverse triangle  $\text{unit} \circ \text{inv} = \text{id}$  (needed to package `additiveProduct M N` as a `ClassicalObject`) is not proved here.

**Proof.** Both sides are compared pointwise (by extensionality). It follows from the extensionality for module morphisms, the extensionality for bilinear maps and congruence of function application.

**Lean 4 source** [QLambda/Domain/Presheaf/ClassicalMonoidal.lean](#)

```

theorem additiveProduct_inv_hom
  {M N : Module}
  (hM : CanonicalReflexivity M) (hN : CanonicalReflexivity N) :
  Hom.comp (additiveProductDoubleDualInv hM hN)
    (DayNegation.unit (additiveProduct M N)) =
  Hom.id (additiveProduct M N) := by
  apply Hom.ext
  intro n x
  apply Prod.ext
  * change (hM.inv.app n
    ((DayNegation.map (DayNegation.map (additiveFst M N))).app n
      ((DayNegation.unit (additiveProduct M N)).app n x))) =
    x.1
  have hn1 := congrArg (fun f : Hom _ _ => f.app n x)
    (DayNegation.unit_natural (additiveFst M N))
  change
    (DayNegation.unit M).app n ((additiveFst M N).app n x) =
    ((DayNegation.map (DayNegation.map (additiveFst M N))).app n
      ((DayNegation.unit (additiveProduct M N)).app n x)) at hn1
  exact (congrArg (hM.inv.app n) hn1.symm).trans
    (congrArg (fun f : Hom M M => f.app n x.1) hM.inv_hom)
  * change (hN.inv.app n
    ((DayNegation.map (DayNegation.map (additiveSnd M N))).app n
      ((DayNegation.unit (additiveProduct M N)).app n x))) =
    x.2
  have hn2 := congrArg (fun f : Hom _ _ => f.app n x)
    (DayNegation.unit_natural (additiveSnd M N))
  change
    (DayNegation.unit N).app n ((additiveSnd M N).app n x) =
    ((DayNegation.map (DayNegation.map (additiveSnd M N))).app n
      ((DayNegation.unit (additiveProduct M N)).app n x)) at hn2
  exact (congrArg (hN.inv.app n) hn2.symm).trans
    (congrArg (fun f : Hom N N => f.app n x.2) hN.inv_hom)

```

```

/-! ## Classical bit as Yoneda biproduct `y(1+1)  ~=  y(2)`

Per arXiv, `?Bit? = I ? I`. In the CP-presheaf model the correct ? for
finite-dimensional systems is the base-category biproduct preserved by
Yoneda: `y(1) ? y(1) = y(1+1) = y(2)`. The pointwise module product
`additiveProduct I I` is a different construction (categorical product of
modules) and is not isomorphic to `y(2)` under the TNI/effect-sum
constraint; it is retained above only as product scaffolding.
-/

```

#### 4.4.257 Isometry matrix $\text{Fin } 1 \rightarrow \text{Fin } 2$ placing mass at classical bit $b$

**Definition.** Isometry matrix  $\text{Fin } 1 \rightarrow \text{Fin } 2$  placing mass at classical bit  $b$ .

**Construction.** The map sending  $i$  to  $1$  if  $i = b$  then  $1$  else  $0$ .

**Lean 4 source** [QLambda/Domain/Presheaf/ClassicalMonoidal.lean](#)

```

def embedBitMatrix (b : Fin 2) : Matrix (Fin 2) (Fin 1) ? :=
  fun i _ => if i = b then 1 else 0

```

#### 4.4.258 The embed bit matrix is an isometry

**Statement.** For an index  $b$ : the product of  $(\text{embedBitMatrix } b)^\dagger$  and the embed bit matrix of  $b$  equals  $1$ .

**Proof.** Both sides are compared pointwise (by extensionality). The goal is simplified using the definition of the embed bit matrix and standard identities for matrices. Every finite index is checked separately.

**Lean 4 source** [QLambda/Domain/Presheaf/ClassicalMonoidal.lean](#)

```

theorem embedBitMatrix_isometry (b : Fin 2) :
  (embedBitMatrix b)ᵀ * embedBitMatrix b = 1 := by
  ext i j
  fin_cases i; fin_cases j
  simp [embedBitMatrix, Matrix.mul_apply, Matrix.conjTranspose_apply]

```

#### 4.4.259 Superoperator embedding of the unit into the $b$ -th basis ray of $y(2)$

**Definition.** Superoperator embedding of the unit into the  $b$ -th basis ray of  $y(2)$ .

**Construction.** Defined to be the map induced by the isometry the embed bit matrix isometry property of  $b$ .

**Lean 4 source** [QLambda/Domain/Presheaf/ClassicalMonoidal.lean](#)

```

noncomputable def bitEmbedSO (b : Fin 2) : Superoperator 1 2 :=
  Superoperator.ofIsometry (embedBitMatrix b) (embedBitMatrix_isometry b)

```

#### 4.4.260 Postcomposition $y(A) \rightarrow y(B)$ induced by a fixed superoperator $A \rightarrow B$

**Definition.** Postcomposition  $y(A) \rightarrow y(B)$  induced by a fixed superoperator  $A \rightarrow B$ .

**Construction.** Constructed by supplying each component: application, functorial action zero, functorial action sum and naturality. The accompanying laws are verified from the definitions.

**Lean 4 source** `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```
noncomputable def representablePostcomp {A B : Nat} (phi : Superoperator A B) :
  Hom (representable A) (representable B) where
  app := fun _ x => Superoperator.comp phi x
  map_zero := fun _ => Superoperator.comp_zero_right _
  map_sum := fun h => SigmaMon.ChoiSum.comp_left phi h
  naturality := by
    intro m n x f
    change Superoperator.comp phi (Superoperator.comp x f) =
      Superoperator.comp (Superoperator.comp phi x) f
    exact Superoperator.comp_assoc phi x f
```

#### 4.4.261 Yoneda bit carrier: $I \oplus I = y(1+1)$

**Definition.** Yoneda bit carrier:  $I \oplus I = y(1+1)$ .

**Construction.** Defined to be the representable module of the sum of 1 and 1.

**Lean 4 source** `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```
noncomputable abbrev additiveBitModule : Module :=
  representable (1 + 1)
```

#### 4.4.262 $y(1+1) \cong y(2)$ (definitional on $\mathbb{N}$ , packaged as a module `Iso`)

**Definition.**  $y(1+1) \cong y(2)$  (definitional on  $\mathbb{N}$ , packaged as a module `Iso`).

**Construction.** Constructed by supplying each component: morphism, inverse, morphism inverse and inverse morphism. The accompanying laws are verified from the definitions.

**Lean 4 source** `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```
noncomputable def additiveBitIso :
  Iso additiveBitModule (representable 2) where
  hom := Hom.id _
  inv := Hom.id _
  hom_inv := Hom.id_comp _
  inv_hom := Hom.id_comp _
```

#### 4.4.263 The additive bit superoperator module equals a representable module

**Statement.** The additive bit superoperator module equals the representable module at 2.

**Proof.** By definition. Unfolding the additive bit superoperator module turns the left-hand side, the additive bit superoperator module, into the right-hand side, the representable module at 2; the two sides are the same term.



**Lean 4 source** `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```
theorem additiveBitModule_eq_representable :  
  additiveBitModule = representable 2 :=  
  rfl
```

#### 4.4.264 Left classical bit injection $\mathbf{I} \rightarrow \mathbf{y}(2)$

**Definition.** Left classical bit injection  $\mathbf{I} \rightarrow \mathbf{y}(2)$ .

**Construction.** Defined to be the representable postcomposition of the bit embed superoperator at 0.

**Lean 4 source** `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```
noncomputable def bitInl : Hom dayTensorUnit (representable 2) :=  
  representablePostcomp (bitEmbedSO 0)
```

#### 4.4.265 Right classical bit injection $\mathbf{I} \rightarrow \mathbf{y}(2)$

**Definition.** Right classical bit injection  $\mathbf{I} \rightarrow \mathbf{y}(2)$ .

**Construction.** Defined to be the representable postcomposition of the bit embed superoperator at 1.

**Lean 4 source** `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```
noncomputable def bitInr : Hom dayTensorUnit (representable 2) :=  
  representablePostcomp (bitEmbedSO 1)
```

#### 4.4.266 Classical bit object: transport classicality of $\mathbf{y}(2)$ along additive bit isomorphism

**Definition.** Classical bit object: transport classicality of  $\mathbf{y}(2)$  along `additiveBitIso`.

**Construction.** Defined to be the construction from a module isomorphism of the representable classical object of `by decide` at 2 and the symmetry.

**Lean 4 source** `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```
noncomputable def bitClassicalObject :  
  ClassicalObject DayNegation.data :=  
  ClassicalObject.ofIso  
    (representableClassicalObject 2 (by decide))  
    additiveBitIso.symm
```

#### 4.4.267 Bit classical object of the module

**Statement.** The module equals the additive bit superoperator module. Formally: `bitClassicalObject.module = additiveBitModule`.

**Proof.** By definition. Unfolding the module turns the left-hand side, the module, into the right-hand side, the additive bit superoperator module; the two sides are the same term.

**Lean 4 source** `QLambda/Domain/Presheaf/ClassicalMonoidal.lean`

```
theorem bitClassicalObject_module :
  bitClassicalObject.module = additiveBitModule :=
  rfl
```

#### 4.4.268 A based module canonically isomorphic to its second dual

**Definition.** A based module canonically isomorphic to its second dual.

**Construction.** An element consists of module, basis and reflexive, subject to the laws canonical.

**Lean 4 source** [QLambda/Domain/Presheaf/ClassicalObject.lean](#)

```
structure ClassicalObject (D : NegationData.{u}) where
  module : Module.{u}
  basis : PseudoBasis module
  reflexive : Iso module (D.doubleDual module)
  canonical : reflexive.hom = D.unit module
```

#### 4.4.269 The actual biorthogonal objects for Day negation

**Definition.** The actual biorthogonal objects for Day negation. This is a full subcategory selected by an exhibited inverse to the canonical continuation map; generic continuation objects are deliberately not included.

**Construction.** Defined to be the classical object of the data.

**Lean 4 source** [QLambda/Domain/Presheaf/ClassicalObject.lean](#)

```
abbrev BiorthogonalObject :=
  ClassicalObject (DayNegation.data)
```

#### 4.4.270 Morphisms in the classical subcategory are the underlying module maps; the subcategory is full

**Definition.** Morphisms in the classical subcategory are the underlying module maps; the subcategory is full.

**Construction.** Defined to be the module morphism of the module of  $M$  and the module of  $N$ .

**Lean 4 source** [QLambda/Domain/Presheaf/ClassicalObject.lean](#)

```
abbrev Hom (M N : ClassicalObject D) : Type u :=
  SuperoperatorModule.Hom M.module N.module
```

#### 4.4.271 Definition of the classical object of the identity

**Definition.** The identity of  $M$  is a module morphism from  $M$  to  $M$ .

**Construction.** Defined to be the identity of the module of  $M$ .

**Lean 4 source** [QLambda/Domain/Presheaf/ClassicalObject.lean](#)

```
def id (M : ClassicalObject D) : Hom M M :=
  SuperoperatorModule.Hom.id M.module
```

#### 4.4.272 Definition of the composition of classical objects

**Definition.** The composition of  $g$  and  $f$  is a module morphism from  $L$  to  $N$ .

**Construction.** Defined to be the composite of  $g$  after  $f$ .

**Lean 4 source** `QLambda/Domain/Presheaf/ClassicalObject.lean`

```
def comp {L M N : ClassicalObject D}
  (g : Hom M N) (f : Hom L M) : Hom L N :=
  SuperoperatorModule.Hom.comp g f
```

#### 4.4.273 The identity is a left unit for composition for classical objects

**Statement.** For a module morphism  $f$ : the composite of the identity of  $N$  after  $f$  equals  $f$ .

**Proof.** This is an instance of the fact that the identity is a left unit for composition for module morphisms.

**Lean 4 source** `QLambda/Domain/Presheaf/ClassicalObject.lean`

```
theorem id_comp {M N : ClassicalObject D} (f : Hom M N) :
  comp (id N) f = f :=
  SuperoperatorModule.Hom.id_comp f
```

#### 4.4.274 The identity is a right unit for composition for classical objects

**Statement.** For a module morphism  $f$ : the composite of  $f$  after the identity of  $M$  equals  $f$ .

**Proof.** This is an instance of the fact that the identity is a right unit for composition for module morphisms.

**Lean 4 source** `QLambda/Domain/Presheaf/ClassicalObject.lean`

```
theorem comp_id {M N : ClassicalObject D} (f : Hom M N) :
  comp f (id M) = f :=
  SuperoperatorModule.Hom.comp_id f
```

#### 4.4.275 Composition for classical objects is associative

**Statement.** For module morphisms  $g, f$ : if  $\text{Hom } M \ N$ , then the composite of  $h$  after the composite of  $g$  after  $f$  equals the composite of the composite of  $h$  after  $g$  after  $f$ .

**Proof.** This is an instance of the fact that composition for module morphisms is associative, applied to the hypothesis that  $\text{Hom } M \ N$ .

**Lean 4 source** `QLambda/Domain/Presheaf/ClassicalObject.lean`

```
theorem comp_assoc {K L M N : ClassicalObject D}
  (h : Hom M N) (g : Hom L M) (f : Hom K L) :
  comp h (comp g f) = comp (comp h g) f :=
  SuperoperatorModule.Hom.comp_assoc h g f
```

#### 4.4.276 Concrete module-level description of the first Day negation of a representable

**Definition.** Concrete module-level description of the first Day negation of a representable.

**Construction.** Defined to be the Day internal morphism representable isomorphism of  $A$  and the Day tensor unit.

**Lean 4 source** `QLambda/Domain/Presheaf/ClassicalRepresentableOne.lean`

```
noncomputable def dayNegationRepresentableIso (A : Nat) :  
  Iso (DayNegation.neg (representable A))  
    (internalHomRepresentable A dayTensorUnit) :=  
  dayInternalHomRepresentableIso A dayTensorUnit
```

#### 4.4.277 Explicit fibers of representable Day negation: $\neg y(A)(n) \simeq \text{Superoperator } (n * A) \ 1$

**Definition.** Explicit fibers of representable Day negation:  $\neg y(A)(n) \simeq \text{Superoperator } (n * A) \ 1$ .

**Construction.** Defined by an explicit formula built from the Day internal morphism representable fiber equivalence, the Day tensor unit and the reflexivity.

**Lean 4 source** `QLambda/Domain/Presheaf/ClassicalRepresentableOne.lean`

```
noncomputable def dayNegationRepresentableFiberEquiv (A n : Nat) :  
  ((DayNegation.neg (representable A)).obj n).Carrier ?  
    Superoperator (n * A) 1 :=  
  (dayInternalHomRepresentableFiberEquiv A dayTensorUnit n).trans  
    (Equiv.refl _)
```

#### 4.4.278 The tensor pairing is the distinguished element of $\neg y(1)(1)$

**Definition.** The tensor pairing is the distinguished element of  $\neg y(1)(1)$ .

**Construction.** Defined to be the Day tensor product introduction at 1, 1.

**Lean 4 source** `QLambda/Domain/Presheaf/ClassicalRepresentableOne.lean`

```
noncomputable def dayNegationOneProbe :  
  ((DayNegation.neg (representable 1)).obj 1).Carrier :=  
  dayTensorIntro 1 1
```

#### 4.4.279 Components of the Day negation one probe

**Statement.** For natural numbers  $m, n$ , superoperators  $x, y$ : the application of  $x$  and  $y$  equals the tensor product of  $x$  and  $y$ .

**Proof.** By definition: the left-hand side, the application of  $x$  and  $y$ , and the right-hand side, the tensor product of  $x$  and  $y$ , unfold to the same term.

**Lean 4 source** `QLambda/Domain/Presheaf/ClassicalRepresentableOne.lean`

```
theorem dayNegationOneProbe_app {m n : Nat}  
  (x : Superoperator m 1) (y : Superoperator n 1) :  
  dayNegationOneProbe.app x y = Superoperator.tensor x y :=  
  rfl
```

#### 4.4.280 Evaluation at the tensor pairing gives a concrete inverse candidate from $\neg\neg y(1)$ to $y(1)$

**Definition.** Evaluation at the tensor pairing gives a concrete inverse candidate from  $\neg\neg y(1)$  to  $y(1)$ .

**Construction.** Constructed by supplying each component: application, functorial action zero, functorial action sum, naturality and f. The accompanying laws are verified from the definitions.

#### Lean 4 source `QLambda/Domain/Presheaf/ClassicalRepresentableOne.lean`

```
noncomputable def representableOneDoubleDualEvaluation :
  Hom (DayNegation.neg (DayNegation.neg (representable 1)))
    (representable 1) where
  app := fun n F =>
    Superoperator.comp
      (F.app (Superoperator.identity n) dayNegationOneProbe)
      (Superoperator.tensorRightUnitorInv n)
  map_zero := by
    intro n
    change Superoperator.comp 0
      (Superoperator.tensorRightUnitorInv n) = 0
    rw [Superoperator.comp_zero_left]
  map_sum := by
    intro ? _ n f s h
    exact SigmaMon.ChoiSum.comp_right
      (Superoperator.tensorRightUnitorInv n)
      (h n 1 (Superoperator.identity n) dayNegationOneProbe)
  naturality := by
    intro m n F f
    change
      Superoperator.comp
        (F.app
          (Superoperator.comp f (Superoperator.identity m))
          dayNegationOneProbe)
        (Superoperator.tensorRightUnitorInv m) =
      Superoperator.comp
        (Superoperator.comp
          (F.app (Superoperator.identity n) dayNegationOneProbe)
          (Superoperator.tensorRightUnitorInv n))
        f
    rw [Superoperator.comp_identity]
  have hF := F.naturality (Superoperator.identity n)
    dayNegationOneProbe f (Superoperator.identity 1)
  change
    F.app
      (Superoperator.comp (Superoperator.identity n) f)
      ((DayNegation.neg (representable 1)).act
        dayNegationOneProbe (Superoperator.identity 1)) =
    Superoperator.comp
      (F.app (Superoperator.identity n) dayNegationOneProbe)
      (Superoperator.tensor f (Superoperator.identity 1)) at hF
  rw [Superoperator.identity_comp,
    (DayNegation.neg (representable 1)).act_id] at hF
  rw [hF]
  calc
    Superoperator.comp
      (Superoperator.comp
        (F.app (Superoperator.identity n) dayNegationOneProbe)
```

```

      (Superoperator.tensor f (Superoperator.identity 1)))
    (Superoperator.tensorRightUnitorInv m) =
  Superoperator.comp
    (F.app (Superoperator.identity n) dayNegationOneProbe)
    (Superoperator.comp
      (Superoperator.tensor f (Superoperator.identity 1))
      (Superoperator.tensorRightUnitorInv m)) :=
    (Superoperator.comp_assoc _ _ _).symm
_ = Superoperator.comp
  (F.app (Superoperator.identity n) dayNegationOneProbe)
  (Superoperator.comp
    (Superoperator.tensorRightUnitorInv n) f) := by
    rw [Superoperator.tensorRightUnitorInv_naturality]
_ = Superoperator.comp
  (Superoperator.comp
    (F.app (Superoperator.identity n) dayNegationOneProbe)
    (Superoperator.tensorRightUnitorInv n))
  f :=
  Superoperator.comp_assoc _ _ _

```

#### 4.4.281 Components of the representable one double dual evaluation

**Statement.** For a natural number  $n$ : the application of  $n$  and  $F$  equals the composite of the application of `Superoperator.identity n` and `dayNegationOneProbe` after the inverse tensor right unitor of  $n$ .

**Proof.** By definition: the left-hand side, the application of  $n$  and  $F$ , and the right-hand side, the composite of the application of `Superoperator.identity n` and `dayNegationOneProbe` after the inverse tensor right unitor of  $n$ , unfold to the same term.

#### Lean 4 source `QLambda/Domain/Presheaf/ClassicalRepresentableOne.lean`

```

theorem representableOneDoubleDualEvaluation_app
  (n : Nat)
  (F : ((DayNegation.neg (DayNegation.neg (representable 1))).obj n).Carrier) :
  representableOneDoubleDualEvaluation_app n F =
  Superoperator.comp
    (F.app (Superoperator.identity n) dayNegationOneProbe)
    (Superoperator.tensorRightUnitorInv n) :=
  rfl

```

#### 4.4.282 Components of the representable one of the unit of the application

**Statement.** For natural numbers  $n, p, q$ , superoperators  $x, r$ :  $((\text{DayNegation.unit } (\text{representable } 1)).\text{app } n \ x) . \text{app } r \ b$  equals the act of the application of `Superoperator.identity q` and  $(\text{representable } 1).\text{act } x \ r$  and the tensor swap of  $p$  and  $q$ .

**Proof.** By definition: the left-hand side,  $((\text{DayNegation.unit } (\text{representable } 1)).\text{app } n \ x) . \text{app } r \ b$ , and the right-hand side, the act of the application of `Superoperator.identity q` and  $(\text{representable } 1).\text{act } x \ r$  and the tensor swap of  $p$  and  $q$ , unfold to the same term.

#### Lean 4 source `QLambda/Domain/Presheaf/ClassicalRepresentableOne.lean`

```

theorem representableOne_unit_app_app
  {n p q : Nat} (x : Superoperator n 1)
  (r : Superoperator p n)
  (b : ((DayNegation.neg (representable 1)).obj q).Carrier) :
  ((DayNegation.unit (representable 1)).app n x).app r b =
    dayTensorUnit.act
      (b.app (Superoperator.identity q)
        ((representable 1).act x r))
      (Superoperator.tensorSwap p q) :=
  rfl

```

#### 4.4.283 Tensor swap of one of one

**Statement.** The tensor swap at 1, 1 equals the identity on dimension 1.

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the reflexivity of the map induced by an index equivalence and the extensionality for bilinear maps.

**Lean 4 source** [QLambda/Domain/Presheaf/ClassicalRepresentableOne.lean](#)

```

private theorem tensorSwap_one_one :
  Superoperator.tensorSwap 1 1 = Superoperator.identity 1 := by
  rw [show Superoperator.tensorSwap 1 1 =
    Superoperator.ofEquivalence (Superoperator.tensorSwapEquiv 1 1) from rfl]
  have h : Superoperator.tensorSwapEquiv 1 1 =
    Equiv.refl (Fin 1) := by
    apply Equiv.ext
    intro i
    apply Fin.ext
    omega
  rw [h, Superoperator.ofEquivalence_refl]

```

#### 4.4.284 Inverse tensor right unitor of one

**Statement.** The inverse tensor right unitor at 1 equals the identity on dimension 1.

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the reflexivity of the map induced by an index equivalence and the extensionality for bilinear maps.

**Lean 4 source** [QLambda/Domain/Presheaf/ClassicalRepresentableOne.lean](#)

```

private theorem tensorRightUnitorInv_one :
  Superoperator.tensorRightUnitorInv 1 =
    Superoperator.identity 1 := by
  rw [show Superoperator.tensorRightUnitorInv 1 =
    Superoperator.ofEquivalence
      (Superoperator.tensorRightUnitorEquiv 1).symm from rfl]
  have h : (Superoperator.tensorRightUnitorEquiv 1).symm =
    Equiv.refl (Fin 1) := by
    apply Equiv.ext
    intro i
    apply Fin.ext
    omega
  rw [h, Superoperator.ofEquivalence_refl]

```

#### 4.4.285 Evaluation at the tensor probe is a retraction of the canonical unit for $\mathbf{y}(1)$

**Statement.** Evaluation at the tensor probe is a retraction of the canonical unit for  $\mathbf{y}(1)$ . The converse is precisely the remaining bipolar-surjectivity direction. Formally:  $\text{Hom.comp representable OneDoubleDualEvaluation (DayNegation.unit (representable 1))} = \text{Hom.id (representable 1)}$ .

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the components of the composition, the components of the representable one double dual evaluation, the components of the identity and the components of the representable one of the unit of the application.

#### Lean 4 source `QLambda/Domain/Presheaf/ClassicalRepresentableOne.lean`

```
theorem representableOneDoubleDualEvaluation_unit :
  Hom.comp representableOneDoubleDualEvaluation
    (DayNegation.unit (representable 1)) =
    Hom.id (representable 1) := by
  apply Hom.ext
  intro n x
  rw [Hom.comp_app, representableOneDoubleDualEvaluation_app, Hom.id_app]
  change Superoperator n 1 at x
  rw [representableOne_unit_app_app]
  unfold dayNegationOneProbe dayTensorIntro
  simp only [representable_act, Superoperator.comp_identity]
  change
    Superoperator.comp
      (Superoperator.comp
        (Superoperator.tensor (Superoperator.identity 1) x)
        (Superoperator.tensorSwap n 1))
      (Superoperator.tensorRightUnitorInv n) = x
  rw [← Superoperator.tensorSwap_naturality x
      (Superoperator.identity 1),
      tensorSwap_one_one, Superoperator.identity_comp,
      Superoperator.tensorRightUnitorInv_naturality,
      tensorRightUnitorInv_one, Superoperator.identity_comp]
```

#### 4.4.286 The canonical double-negation unit is fiberwise injective for $\mathbf{y}(1)$

**Statement.** The canonical double-negation unit is fiberwise injective for  $\mathbf{y}(1)$ . Formally:  $\text{Injective ((DayNegation.unit (representable 1)).app n)}$ .

**Proof.** The claim follows directly from the definitions of the objects involved.

#### Lean 4 source `QLambda/Domain/Presheaf/ClassicalRepresentableOne.lean`

```
theorem representableOne_unit_injective (n : Nat) :
  Function.Injective
    ((DayNegation.unit (representable 1)).app n) := by
  intro x y hxy
  have hret (z : Superoperator n 1) :
    representableOneDoubleDualEvaluation_app n
      ((DayNegation.unit (representable 1)).app n z) = z := by
  have h := congrArg
    (fun f : Hom (representable 1) (representable 1) => f.app n z)
    representableOneDoubleDualEvaluation_unit
```



```

exact h
rw [ <- hret x, hxy, hret y]

```

#### 4.4.287 For $\mathbf{y}(1)$ , fiberwise bipolar surjectivity alone completes the concrete reflexivity witness

**Definition.** For  $\mathbf{y}(1)$ , fiberwise bipolar surjectivity alone completes the concrete reflexivity witness: the required sum-preserving inverse is the explicit evaluation map above.

**Construction.** Constructed by supplying each component: inverse, morphism inverse and inverse morphism. The accompanying laws are verified from the definitions.

#### Lean 4 source `QLambda/Domain/Presheaf/ClassicalRepresentableOne.lean`

```

noncomputable def representableOneReflexivityOfSurjective
  (h : forall n, Function.Surjective
    ((DayNegation.unit (representable 1)).app n)) :
  RepresentableReflexivity 1 where
inv := representableOneDoubleDualEvaluation
hom_inv := by
  apply Hom.ext
  intro n F
  obtain <x, rfl> := h n F
  have hret := congrArg
    (fun f : Hom (representable 1) (representable 1) => f.app n x)
    representableOneDoubleDualEvaluation_unit
  exact congrArg ((DayNegation.unit (representable 1)).app n) hret
inv_hom := representableOneDoubleDualEvaluation_unit

```

#### 4.4.288 Every map $(q \star 1) \rightarrow 1$ factors as $(\chi \circ \rho^{-1}) \otimes \text{id}_1$

**Statement.** Every map  $(q \star 1) \rightarrow 1$  factors as  $(\chi \circ \rho^{-1}) \otimes \text{id}_1$ .

**Proof.** The key step rewrites with the fact that composition for superoperators is associative, the fact that the tensor right unitor and its inverse compose to the identity, the identity of a composite for superoperators and the composition of the identity for superoperators.

#### Lean 4 source `QLambda/Domain/Presheaf/ClassicalRepresentableOne.lean`

```

theorem tensor_comp_rightUnitorInv_identity (q : Nat)
  (chi : Superoperator (q * 1) 1) :
  Superoperator.tensor
    (Superoperator.comp chi (Superoperator.tensorRightUnitorInv q))
    (Superoperator.identity 1) = chi := by
set f := Superoperator.comp chi (Superoperator.tensorRightUnitorInv q)
have hnats := Superoperator.tensorRightUnitor_naturality f
have htensor :
  Superoperator.tensor f (Superoperator.identity 1) =
    Superoperator.comp (Superoperator.tensorRightUnitorInv 1)
      (Superoperator.comp f (Superoperator.tensorRightUnitor q)) := by
have h :=
  congrArg (Superoperator.comp (Superoperator.tensorRightUnitorInv 1)) hnats
simp [Superoperator.comp_assoc, Superoperator.tensorRightUnitor_inv_hom,
  Superoperator.identity_comp] using h
rw [htensor]

```

```

change
  Superoperator.comp (Superoperator.tensorRightUnitInv 1)
    (Superoperator.comp
      (Superoperator.comp chi (Superoperator.tensorRightUnitInv q))
      (Superoperator.tensorRightUnit q)) =
  chi
rw [ <- Superoperator.comp_assoc, Superoperator.tensorRightUnit_inv_hom,
  Superoperator.comp_identity, tensorRightUnitInv_one,
  Superoperator.identity_comp]

```

#### 4.4.289 Reconstruct a functional in $\neg y(1)_q$ from its value on the two identities

**Statement.** Reconstruct a functional in  $\neg y(1)_q$  from its value on the two identities.

**Proof.** The goal is simplified using the identity of a composite for superoperators.

**Lean 4 source** [QLambda/Domain/Presheaf/ClassicalRepresentableOne.lean](#)

```

theorem dayNegationOne_app_eq {q p q' : Nat}
  (b : ((DayNegation.neg (representable 1)).obj q).Carrier)
  (r : Superoperator p q) (s : Superoperator q' 1) :
  b.app r s =
  dayTensorUnit.act
    (b.app (Superoperator.identity q) (Superoperator.identity 1))
    (Superoperator.tensor r s) := by
  have hb := b.naturality (Superoperator.identity q) (Superoperator.identity 1) r s
  simpa [Superoperator.identity_comp] using hb

```

#### 4.4.290 Convert the tensor-unit action to ordinary superoperator composition

**Statement.** Convert the tensor-unit action to ordinary superoperator composition. Formally: `dayTensorUnit.act x f = Superoperator.comp x f`.

**Proof.** This is an instance of the representable module of the act.

**Lean 4 source** [QLambda/Domain/Presheaf/ClassicalRepresentableOne.lean](#)

```

theorem dayTensorUnit_act_eq_comp {m n : Nat}
  (x : Superoperator n 1) (f : Superoperator m n) :
  dayTensorUnit.act x f = Superoperator.comp x f :=
  representable_act x f

```

#### 4.4.291 The probe generates every fiber of $\neg y(1)$ after right-unitor transport

**Statement.** The probe generates every fiber of  $\neg y(1)$  after right-unitor transport.

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the identity of a composite for superoperators, the fact that parallel composition is a bifunctor: it preserves sequential composition in both arguments, the convert the tensor-unit action to ordinary superoperator composition and the extensionality for bilinear maps.

**Lean 4 source** [QLambda/Domain/Presheaf/ClassicalRepresentableOne.lean](#)

```

theorem dayNegationOneProbe_generates {q : Nat}
  (b : ((DayNegation.neg (representable 1)).obj q).Carrier) :
  (DayNegation.neg (representable 1)).act dayNegationOneProbe
    (Superoperator.comp
      (b.app (Superoperator.identity q) (Superoperator.identity 1))
      (Superoperator.tensorRightUnitorInv q)) =
    b := by
  apply Bilinear.ext
  intro p q' r s
  change Superoperator p q at r
  change Superoperator q' 1 at s
  set chi : Superoperator (q * 1) 1 :=
    b.app (Superoperator.identity q) (Superoperator.identity 1)
  have hchi := tensor_comp_rightUnitorInv_identity q chi
  -- LHS is definitionally `tensor (comp (comp chi ?^-1) r) s`.
  have hLHS :
    ((DayNegation.neg (representable 1)).act dayNegationOneProbe
      (Superoperator.comp chi (Superoperator.tensorRightUnitorInv q))).app
      r s =
    Superoperator.tensor
      (Superoperator.comp
        (Superoperator.comp chi (Superoperator.tensorRightUnitorInv q)) r)
      s :=
  rfl
  have hRHS :
    Superoperator.tensor
      (Superoperator.comp
        (Superoperator.comp chi (Superoperator.tensorRightUnitorInv q)) r)
      s =
    b.app r s := by
  have hfactor :
    Superoperator.tensor
      (Superoperator.comp
        (Superoperator.comp chi (Superoperator.tensorRightUnitorInv q)) r)
      s =
    Superoperator.comp
      (Superoperator.tensor
        (Superoperator.comp chi (Superoperator.tensorRightUnitorInv q))
        (Superoperator.identity 1))
      (Superoperator.tensor r s) := by
  conv_lhs => rw [ <- Superoperator.identity_comp s]
  rw [Superoperator.tensor_comp]
  rw [hfactor, hchi, <- dayTensorUnit_act_eq_comp]
  simp [chi] using (dayNegationOne_app_eq (q := q) b r s).symm
  exact hLHS.trans hRHS

```

#### 4.4.292 Probe action evaluates as a tensor after precomposition

**Statement.** Probe action evaluates as a tensor after precomposition.

**Proof.** By definition: the left-hand side, an explicit expression in the negation, the representable module and the Day negation one probe, and the right-hand side, the tensor product of the composite of  $f$  after  $r$  and  $s$ , unfold to the same term.

**Lean 4 source** [QLambda/Domain/Presheaf/ClassicalRepresentableOne.lean](#)

```

theorem dayNegationOneProbe_act_app {q p q' : Nat}
  (f : Superoperator q 1) (r : Superoperator p q)
  (s : Superoperator q' 1) :
  ((DayNegation.neg (representable 1)).act dayNegationOneProbe f).app r s =
    Superoperator.tensor (Superoperator.comp f r) s :=
  rfl

```

#### 4.4.293 Naturality of a double dual in the first argument

**Statement.** Naturality of a double dual in the first argument.

**Proof.** The goal is simplified using the identity of a composite for superoperators and the definition of the negation.

**Lean 4 source** [QLambda/Domain/Presheaf/ClassicalRepresentableOne.lean](#)

```

theorem representableOne_doubleDual_app_identity
  {n p q : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable 1))).obj n).Carrier)
  (r : Superoperator p n)
  (b : ((DayNegation.neg (representable 1)).obj q).Carrier) :
  F.app r b =
    dayTensorUnit.act (F.app (Superoperator.identity n) b)
      (Superoperator.tensor r (Superoperator.identity q)) := by
  have hF := F.naturality (Superoperator.identity n) b r (Superoperator.identity q)
  simp [Superoperator.identity_comp,
    (DayNegation.neg (representable 1)).act_id] using hF

```

#### 4.4.294 Naturality of a double dual against probe action

**Statement.** Naturality of a double dual against probe action.

**Proof.** The goal is simplified using the composition of the identity for superoperators.

**Lean 4 source** [QLambda/Domain/Presheaf/ClassicalRepresentableOne.lean](#)

```

theorem representableOne_doubleDual_app_probe
  {n q : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable 1))).obj n).Carrier)
  (f : Superoperator q 1) :
  F.app (Superoperator.identity n)
    ((DayNegation.neg (representable 1)).act dayNegationOneProbe f) =
    dayTensorUnit.act
      (F.app (Superoperator.identity n) dayNegationOneProbe)
      (Superoperator.tensor (Superoperator.identity n) f) := by
  have hF := F.naturality (Superoperator.identity n) dayNegationOneProbe
    (Superoperator.identity n) f
  simp [Superoperator.comp_identity] using hF

```

#### 4.4.295 Evaluation is a section of the canonical unit for $y(1)$

**Statement.** Evaluation is a section of the canonical unit for  $y(1)$ .

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the components of the composition, the components of the identity, the components of the representable one double dual evaluation and the probe action evaluates as a tensor after precomposition.

#### Lean 4 source `QLambda/Domain/Presheaf/ClassicalRepresentableOne.lean`

```
theorem representableOne_unit_eval :
  Hom.comp (DayNegation.unit (representable 1))
    representableOneDoubleDualEvaluation =
    Hom.id (DayNegation.neg (DayNegation.neg (representable 1))) := by
  apply Hom.ext
  intro n F
  apply Bilinear.ext
  intro p q r b
  change Superoperator p n at r
  rw [Hom.comp_app, Hom.id_app, representableOneDoubleDualEvaluation_app]
  set chi : Superoperator (n * 1) 1 :=
    F.app (Superoperator.identity n) dayNegationOneProbe
  set x : Superoperator n 1 :=
    Superoperator.comp chi (Superoperator.tensorRightUnitorInv n)
  -- Leap to the Superoperator form; `dayTensorUnit.act` is defeq `comp`.
  change
    Superoperator.comp
      (b.app (Superoperator.identity q) (Superoperator.comp x r))
      (Superoperator.tensorSwap p q) =
    F.app r b
  set f : Superoperator q 1 :=
    Superoperator.comp
      (b.app (Superoperator.identity q) (Superoperator.identity 1))
      (Superoperator.tensorRightUnitorInv q)
  have hb :
    (DayNegation.neg (representable 1)).act dayNegationOneProbe f = b :=
    dayNegationOneProbe_generates b
  -- Avoid rewriting `b` under `.app` (Carrier/Bilinear opacity); use congrArg.
  have happ_b :
    b.app (Superoperator.identity q) (Superoperator.comp x r) =
    Superoperator.tensor f (Superoperator.comp x r) := by
    have h :=
      congrArg
        (fun b : ((DayNegation.neg (representable 1)).obj q).Carrier =>
          b.app (Superoperator.identity q) (Superoperator.comp x r))
        hb
    rw [← h, dayNegationOneProbe_act_app, Superoperator.comp_identity]
  rw [happ_b]
  have hswap :
    Superoperator.comp
      (Superoperator.tensor f (Superoperator.comp x r))
      (Superoperator.tensorSwap p q) =
    Superoperator.tensor (Superoperator.comp x r) f := by
    have hnata :=
      Superoperator.tensorSwap_naturality (Superoperator.comp x r) f
    simpa [tensorSwap_one_one, Superoperator.identity_comp] using hnata.symm
  rw [hswap]
  have htensor :
    Superoperator.tensor (Superoperator.comp x r) f =
    Superoperator.comp chi (Superoperator.tensor r f) := by
```

```

have hfactor :
  Superoperator.tensor (Superoperator.comp x r) f =
    Superoperator.comp
      (Superoperator.tensor
        (Superoperator.comp chi (Superoperator.tensorRightUnitInv n))
        (Superoperator.identity 1))
      (Superoperator.tensor r f) := by
change Superoperator.tensor
  (Superoperator.comp
    (Superoperator.comp chi (Superoperator.tensorRightUnitInv n)) r)
f =

--
conv_lhs => rw [ <- Superoperator.identity_comp f]
rw [Superoperator.tensor_comp]
rw [hfactor, tensor_comp_rightUnitInv_identity]
rw [htensor]
-- RHS: replace `b` by probe action via congrArg (Carrier-safe).
have hF_b :
  F.app r b =
    F.app r
      ((DayNegation.neg (representable 1)).act dayNegationOneProbe f) :=
congrArg (F.app r) hb.symm
have hF_exp :
  F.app r
    ((DayNegation.neg (representable 1)).act dayNegationOneProbe f) =
    Superoperator.comp
      (Superoperator.comp chi
        (Superoperator.tensor (Superoperator.identity n) f))
      (Superoperator.tensor r (Superoperator.identity q)) := by
have h1 := representableOne_doubleDual_app_identity F r
  ((DayNegation.neg (representable 1)).act dayNegationOneProbe f)
have h2 := representableOne_doubleDual_app_probe F f
rw [h1, h2]
-- `dayTensorUnit.act` is defeq `Superoperator.comp`; `chi` abbreviates the probe
value.
change
  Superoperator.comp
    (Superoperator.comp chi
      (Superoperator.tensor (Superoperator.identity n) f))
    (Superoperator.tensor r (Superoperator.identity q)) =
  Superoperator.comp
    (Superoperator.comp chi
      (Superoperator.tensor (Superoperator.identity n) f))
    (Superoperator.tensor r (Superoperator.identity q))
rfl
rw [hF_b, hF_exp]
-- Remaining coherence: `chi comp (r ? f) = (chi comp (id ? f)) comp (r ? id)`.
rw [ <- Superoperator.comp_assoc]
congr 1
rw [ <- Superoperator.tensor_comp, Superoperator.identity_comp,
  Superoperator.comp_identity]

```

#### 4.4.296 Fiberwise surjectivity of the canonical unit of $y(1)$

**Statement.** Fiberwise surjectivity of the canonical unit of  $y(1)$ . Formally: `Surjective ((DayNegation.unit (representable 1)).app n)`.

**Proof.** Each component of the claim is established separately.

**Lean 4 source** `QLambda/Domain/Presheaf/ClassicalRepresentableOne.lean`

```
theorem representableOne_unit_surjective (n : Nat) :
  Function.Surjective
    ((DayNegation.unit (representable 1)).app n) := by
  intro F
  refine <representableOneDoubleDualEvaluation.app n F, ?_>
  have h := congrArg
    (fun g : Hom
      (DayNegation.neg (DayNegation.neg (representable 1)))
      (DayNegation.neg (DayNegation.neg (representable 1))) =>
        g.app n F)
    representableOne_unit_eval
  exact h
```

#### 4.4.297 Unconditional reflexivity of the tensor unit representable

**Definition.** Unconditional reflexivity of the tensor unit representable.

**Construction.** Defined to be the representable one reflexivity of surjectivity of the representable one unit surjectivity.

**Lean 4 source** `QLambda/Domain/Presheaf/ClassicalRepresentableOne.lean`

```
noncomputable def representableOneReflexivity : RepresentableReflexivity 1 :=
  representableOneReflexivityOfSurjective representableOne_unit_surjective
```

#### 4.4.298 A representable source constructor, once its concrete finite-dimensional biorthogonality theorem is supplied

**Definition.** A representable source constructor, once its concrete finite-dimensional biorthogonality theorem is supplied.

**Construction.** Constructed by supplying each component: module, basis, reflexive and canonical. The accompanying laws are verified from the definitions.

**Lean 4 source** `QLambda/Domain/Presheaf/ClassicalRepresentableOne.lean`

```
noncomputable def representableBiorthogonalObject
  (A : Nat) (hA : 0 < A) (h : RepresentableReflexivity A) :
  ClassicalObject (DayNegation.data) where
  module := representable A
  basis := representablePseudoBasis A hA
  reflexive := h.iso
  canonical := rfl
```

#### 4.4.299 The tensor unit representable is a classical object

**Definition.** The tensor unit representable is a classical object.

**Construction.** Defined to be the representable biorthogonal object of the by of decide and the representable one reflexivity at 1.

**Lean 4 source** `QLambda/Domain/Presheaf/ClassicalRepresentableOne.lean`

```
noncomputable def representableOneClassicalObject :  
  ClassicalObject (DayNegation.data) :=  
  representableBiorthogonalObject 1 (by decide) representableOneReflexivity
```

#### 4.4.300 The zero partial-sum fiber

**Definition.** The zero partial-sum fiber. Every countable family has its unique value because the carrier is a singleton.

**Construction.** Constructed by supplying each component: carrier, zero, summation, uniqueness, empty, singleton, remove zero and reindexing, among others. The accompanying laws are verified from the definitions.

**Lean 4 source** `QLambda/Domain/Presheaf/ClassicalZero.lean`

```
noncomputable def zeroFiber : Fiber where  
  Carrier := PUnit  
  zero := PUnit.unit  
  summation :=  
    { HasSum := fun _ _ => True  
      unique := fun _ _ => Subsingleton.elim _ _  
      empty := trivial  
      singleton := fun _ => trivial  
      remove_zero := fun _ _ _ => iff_true_intro trivial  
      reindex := fun _ _ _ => iff_true_intro trivial  
      flatten := by  
        intro ? _ ? _ f a  
        constructor  
        * intro _  
          exact <fun _ => PUnit.unit, fun _ => trivial, trivial>  
        * intro _  
          trivial }
```

#### 4.4.301 The zero fiber has at most one element

**Statement.** `zeroFiber.Carrier` has at most one element. Formally: `Subsingleton zeroFiber.Carrier`.

**Proof.** The claim follows directly from the definitions of the objects involved.

**Lean 4 source** `QLambda/Domain/Presheaf/ClassicalZero.lean`

```
theorem zeroFiber_subsingleton : Subsingleton zeroFiber.Carrier := by  
  change Subsingleton PUnit  
  infer_instance
```



#### 4.4.302 There is only one CP map into the zero-dimensional output

**Statement.** There is only one CP map into the zero-dimensional output. Formally: `Subsingleton (CPMap n 0)`.

**Proof.** The claim follows from the definitions of the objects involved.

**Lean 4 source** `QLambda/Domain/Presheaf/ClassicalZero.lean`

```
theorem cpMap_to_zero_subsingleton (n : Nat) :
  Subsingleton (CPMap n 0) where
  allEq _? _? := by
    apply CPMMap.ext
    ext i
    exact Fin.elim0 i.1
```

#### 4.4.303 Consequently every superoperator into dimension zero is the zero map

**Statement.** Consequently every superoperator into dimension zero is the zero map. Formally: `Subsingleton (Superoperator n 0)`.

**Proof.** The claim follows from the definitions of the objects involved.

**Lean 4 source** `QLambda/Domain/Presheaf/ClassicalZero.lean`

```
theorem superoperator_to_zero_subsingleton (n : Nat) :
  Subsingleton (Superoperator n 0) where
  allEq _? _? :=
    Superoperator.ext ((cpMap_to_zero_subsingleton n).allEq _ _)
```

#### 4.4.304 Every fiber of the zero-dimensional representable is a singleton

**Statement.** Every fiber of the zero-dimensional representable is a singleton. Formally: `Subsingleton (((representable 0).obj n).Carrier)`.

**Proof.** This is an instance of the fact that consequently every superoperator into dimension zero is the zero map.

**Lean 4 source** `QLambda/Domain/Presheaf/ClassicalZero.lean`

```
theorem representableZero_subsingleton (n : Nat) :
  Subsingleton (((representable 0).obj n).Carrier) :=
  superoperator_to_zero_subsingleton n
```

#### 4.4.305 Zero specialized module

**Definition.** Zero specialized module.

**Construction.** Constructed by supplying each component: `obj`, `act`, `act zero element`, `act zero functorial action`, `act identity`, `act composite`, `act sum element` and `act sum functorial action`, among others. The accompanying laws are verified from the definitions.

**Lean 4 source** `QLambda/Domain/Presheaf/ClassicalZero.lean`

```

noncomputable def zeroModule : Module where
  obj := fun _ => zeroFiber
  act := fun _ _ => (0 : zeroFiber.Carrier)
  act_zero_element := fun _ => rfl
  act_zero_map := fun _ => rfl
  act_id := fun _ => rfl
  act_comp := fun _ _ _ => rfl
  act_sum_element := by
    intros
    trivial
  act_sum_map := by
    intros
    trivial
  act_sum_from_one := by
    intros
    exact <0, trivial>
  act_sum_tensor_from_one := by
    intros
    exact <0, trivial>

```

#### 4.4.306 Negation of a fiberwise subsingleton module is fiberwise subsingleton

**Statement.** Negation of a fiberwise subsingleton module is fiberwise subsingleton. Formally: `Subsingleton ((DayNegation.neg M).obj n).Carrier`.

**Proof.** The claim follows from the definitions of the objects involved.

#### Lean 4 source `QLambda/Domain/Presheaf/ClassicalZero.lean`

```

theorem neg_subsingleton (M : Module)
  (hM : forall n, Subsingleton (M.obj n).Carrier) (n : Nat) :
  Subsingleton ((DayNegation.neg M).obj n).Carrier where
allEq b c := by
  change Bilinear (representable n) M dayTensorUnit at b c
  apply Bilinear.ext
  intro p q x y
  have hy : y = 0 := (hM q).allEq _ _
  subst y
  exact (b.map_zero_right x).trans (c.map_zero_right x).symm

```

#### 4.4.307 Canonical pseudo-basis of the zero module

**Definition.** Canonical pseudo-basis of the zero module.

**Construction.** Constructed by supplying each component: index, countable index, coefficient, ket, bra and resolves. The accompanying laws are verified from the definitions.

#### Lean 4 source `QLambda/Domain/Presheaf/ClassicalZero.lean`

```

noncomputable def zeroPseudoBasis : PseudoBasis zeroModule where
  Index := PUnit
  countableIndex := inferInstance
  coeff := fun _ => PseudoRepresentable.representable 1 Nat.zero_lt_one
  ket := fun _ => 0

```

```

bra := fun _ => 0
resolves := by
  intro n x
  change True
  trivial

```

#### 4.4.308 The zero module is genuinely fixed by Day double negation

**Definition.** The zero module is genuinely fixed by Day double negation.

**Construction.** Constructed by supplying each component: morphism, inverse, morphism inverse and inverse morphism. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/Presheaf/ClassicalZero.lean](#)

```

noncomputable def zeroDoubleDualIso :
  Iso zeroModule
    (DayNegation.data.doubleDual zeroModule) where
hom := DayNegation.unit zeroModule
inv := 0
hom_inv := by
  apply Hom.ext
  intro n x
  exact
    (neg_subsingleton (DayNegation.neg zeroModule)
      (neg_subsingleton zeroModule
        (fun _ => zeroFiber_subsingleton)) n).allEq _ _
inv_hom := by
  apply Hom.ext
  intro n x
  exact zeroFiber_subsingleton.allEq _ _

```

#### 4.4.309 A concrete inhabitant of the biorthogonal category

**Definition.** A concrete inhabitant of the biorthogonal category.

**Construction.** Constructed by supplying each component: module, basis, reflexive and canonical. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/Presheaf/ClassicalZero.lean](#)

```

noncomputable def zeroBiorthogonalObject :
  ClassicalObject (DayNegation.data) where
module := zeroModule
basis := zeroPseudoBasis
reflexive := zeroDoubleDualIso
canonical := rfl

```

#### 4.4.310 The canonical pseudo-basis of the zero-dimensional representable

**Definition.** The canonical pseudo-basis of the zero-dimensional representable. Its single coefficient factors through zero; this is the positive-dimensional coefficient required by `PseudoBasis`, not a positivity assumption on the represented dimension.

**Construction.** Constructed by supplying each component: index, countable index, coefficient, ket, bra and resolves. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/Presheaf/ClassicalZero.lean](#)

```
noncomputable def representableZeroPseudoBasis :
  PseudoBasis (representable 0) where
  Index := PUnit
  countableIndex := inferInstance
  coeff := fun _ => PseudoRepresentable.representable 1 Nat.zero_lt_one
  ket := fun _ => 0
  bra := fun _ => 0
  resolves := by
    intro n x
    have hx : x = 0 := (representableZero_subsingleton n).allEq _ _
    subst x
    change ((representable 0).obj n).HasSum (fun _ : PUnit => 0) 0
    simpa using ((representable 0).obj n).summation.singleton
      (0 : ((representable 0).obj n).Carrier)
```

#### 4.4.311 The zero-dimensional representable is canonically Day-reflexive

**Definition.** The zero-dimensional representable is canonically Day-reflexive.

**Construction.** Constructed by supplying each component: inverse, morphism inverse and inverse morphism. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/Presheaf/ClassicalZero.lean](#)

```
noncomputable def representableZeroReflexivity :
  RepresentableReflexivity 0 where
  inv := 0
  hom_inv := by
    apply Hom.ext
    intro n x
    exact
      (neg_subsingleton (DayNegation.neg (representable 0))
        (neg_subsingleton (representable 0)
          representableZero_subsingleton) n).allEq _ _
  inv_hom := by
    apply Hom.ext
    intro n x
    exact (representableZero_subsingleton n).allEq _ _
```

#### 4.4.312 Concrete classical object for $\mathbf{y}(0)$

**Definition.** Concrete classical object for  $\mathbf{y}(0)$ .

**Construction.** Constructed by supplying each component: module, basis, reflexive and canonical. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/Presheaf/ClassicalZero.lean](#)

```

noncomputable def representableZeroBiorthogonalObject :
  ClassicalObject (DayNegation.data) where
  module := representable 0
  basis := representableZeroPseudoBasis
  reflexive := representableZeroReflexivity.iso
  canonical := rfl

```

#### 4.4.313 A countably based module whose coefficient objects all belong to the concretely closed coefficient fragment

**Definition.** A countably based module whose coefficient objects all belong to the concretely closed coefficient fragment.

**Construction.** An element consists of `Index`, `countableIndex`, `coeff`, `ket` and `bra`, subject to the laws `resolves`.

**Lean 4 source** `QLambda/Domain/Presheaf/ClosedBasis.lean`

```

structure ClosedBasis (M : Module) where
  Index : Type
  countableIndex : Countable Index
  coeff : Index -> ClosedCoefficient
  ket : forall i, Hom (coeff i).toModule M
  bra : forall i, Hom M (coeff i).toModule
  resolves :
    Hom.HasSum
      (fun i : Index => Hom.comp (ket i) (bra i))
      (Hom.id M)

```

#### 4.4.314 Coefficient modules generated by representables

**Definition.** Coefficient modules generated by representables, symmetric powers, and repeated internal hom with a representable domain.

**Construction.** Generated by the rules `representable`, `symmetricPower` and `internalHomRepresentable`. Every element arises from finitely many applications of these rules, so properties are proved by induction over them.

**Lean 4 source** `QLambda/Domain/Presheaf/ClosedCoefficient.lean`

```

inductive ClosedCoefficient where
| representable (dimension : Nat)
| symmetricPower (dimension degree : Nat)
| internalHomRepresentable (domain : Nat) (codomain : ClosedCoefficient)

```

#### 4.4.315 Concrete interpretation of a generated coefficient code

**Definition.** Concrete interpretation of a generated coefficient code.

**Construction.** Defined by cases on the input: `.representable n`  $\mapsto$  the representable module of  $n$ ; `.symmetricPower A k`  $\mapsto$  the symmetric power of  $A$  and  $k$ ; `.internalHomRepresentable A B`  $\mapsto$  the internal morphism representable of  $A$  and the passage to superoperator module of  $B$ .

#### Lean 4 source `QLambda/Domain/Presheaf/ClosedCoefficient.lean`

```
noncomputable def toModule : ClosedCoefficient -> Module
| .representable n => SuperoperatorModule.representable n
| .symmetricPower A k => SuperoperatorModule.symmetricPower A k
| .internalHomRepresentable A B =>
  SuperoperatorModule.internalHomRepresentable A B.toModule
```

#### 4.4.316 Day tensor of two representable coefficients

**Definition.** Day tensor of two representable coefficients.

**Construction.** Defined to be the representable module of the product of A and B.

#### Lean 4 source `QLambda/Domain/Presheaf/ClosedCoefficient.lean`

```
def tensorRepresentable (A B : Nat) : ClosedCoefficient :=
  .representable (A * B)
```

#### 4.4.317 Passage to superoperator module of the tensor product representable for closed coefficients

**Statement.** For natural numbers A, B:  $(\text{tensorRepresentable } A \ B) . \text{toModule}$  equals the Day tensor product representable of A and B.

**Proof.** By definition. Unfolding the passage to superoperator module turns the left-hand side,  $(\text{tensorRepresentable } A \ B) . \text{toModule}$ , into the right-hand side, the Day tensor product representable of A and B; the two sides are the same term.

#### Lean 4 source `QLambda/Domain/Presheaf/ClosedCoefficient.lean`

```
theorem toModule_tensorRepresentable (A B : Nat) :
  (tensorRepresentable A B).toModule =
  dayTensorRepresentable A B :=
  rfl
```

#### 4.4.318 Internal hom by a representable remains in the generated coefficient fragment

**Definition.** Internal hom by a representable remains in the generated coefficient fragment.

**Construction.** Defined to be the internal morphism representable of A and B.

#### Lean 4 source `QLambda/Domain/Presheaf/ClosedCoefficient.lean`

```
def hom (A : Nat) (B : ClosedCoefficient) : ClosedCoefficient :=
  .internalHomRepresentable A B
```

#### 4.4.319 Passage to superoperator module of the morphism for closed coefficients

**Statement.** For a natural number A:  $(\text{hom } A \ B) . \text{toModule}$  equals the internal morphism representable of A and the passage to superoperator module of B.

**Proof.** By definition. Unfolding the passage to superoperator module turns the left-hand side,  $(\text{hom } A \ B) . \text{toModule}$ , into the right-hand side, the internal morphism representable of  $A$  and the passage to superoperator module of  $B$ ; the two sides are the same term.

**Lean 4 source** [QLambda/Domain/Presheaf/ClosedCoefficient.lean](#)

```
theorem toModule_hom (A : Nat) (B : ClosedCoefficient) :
  (hom A B).toModule =
    SuperoperatorModule.internalHomRepresentable A B.toModule :=
  rfl
```

#### 4.4.320 A module with an exhibited basis from the concrete closed coefficient fragment

**Definition.** A module with an exhibited basis from the concrete closed coefficient fragment.

**Construction.** An element consists of module and basis.

**Lean 4 source** [QLambda/Domain/Presheaf/ClosedGenerated.lean](#)

```
structure ClosedGenerated where
  module : Module
  basis : ClosedBasis module
```

#### 4.4.321 A symmetric tensor power is a concrete one-coefficient generated object

**Definition.** A symmetric tensor power is a concrete one-coefficient generated object.

**Construction.** Constructed by supplying each component: module, basis, countable index, coefficient, ket, bra and resolves. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/Presheaf/ClosedGenerated.lean](#)

```
noncomputable def closedSymmetricPower (A k : Nat) : ClosedGenerated where
  module := symmetricPower A k
  basis :=
    { Index := PUnit
      countableIndex := inferInstance
      coeff := fun _ => .symmetricPower A k
      ket := fun _ => Hom.id _
      bra := fun _ => Hom.id _
      resolves := by
        intro n x
        change ((symmetricPower A k).obj n).HasSum
          (fun _ : PUnit => x) x
        exact ((symmetricPower A k).obj n).summation.singleton x }
```

#### 4.4.322 Every representable belongs to the concretely closed generated subcategory

**Definition.** Every representable belongs to the concretely closed generated subcategory.

**Construction.** Constructed by supplying each component: module, basis, countable index, coefficient, ket, bra and resolves. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/Presheaf/ClosedGenerated.lean](#)

```

noncomputable def closedRepresentable (A : Nat) : ClosedGenerated where
  module := representable A
  basis :=
  { Index := PUnit
    countableIndex := inferInstance
    coeff := fun _ => .representable A
    ket := fun _ => Hom.id _
    bra := fun _ => Hom.id _
    resolves := by
      intro n x
      change ((representable A).obj n).HasSum
        (fun _ : PUnit => x) x
      exact ((representable A).obj n).summation.singleton x }

```

#### 4.4.323 The Day tensor of two representables is again a closed-generated object

**Definition.** The Day tensor of two representables is again a closed-generated object.

**Construction.** Defined to be the closed term representable of the product of A and B.

**Lean 4 source** [QLambda/Domain/Presheaf/ClosedGenerated.lean](#)

```

noncomputable def closedTensorRepresentable (A B : Nat) : ClosedGenerated :=
  closedRepresentable (A * B)

```

#### 4.4.324 Closed term tensor product representable of the module

**Statement.** For natural numbers A, B: `(closedTensorRepresentable A B).module` equals the Day tensor product representable of A and B.

**Proof.** By definition. Unfolding the module turns the left-hand side, `(closedTensorRepresentable A B).module`, into the right-hand side, the Day tensor product representable of A and B; the two sides are the same term.

**Lean 4 source** [QLambda/Domain/Presheaf/ClosedGenerated.lean](#)

```

theorem closedTensorRepresentable_module (A B : Nat) :
  (closedTensorRepresentable A B).module =
    dayTensorRepresentable A B :=
  rfl

```

#### 4.4.325 Internal hom from a representable to a generated coefficient is itself a closed-generated one-coefficient object

**Definition.** Internal hom from a representable to a generated coefficient is itself a closed-generated one-coefficient object.

**Construction.** Constructed by supplying each component: module, basis, countable index, coefficient, ket, bra and resolves. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/Presheaf/ClosedGenerated.lean](#)



```

noncomputable def closedInternalHomRepresentable
  (A : Nat) (B : ClosedCoefficient) : ClosedGenerated where
  module := internalHomRepresentable A B.toModule
  basis :=
  { Index := PUnit
    countableIndex := inferInstance
    coeff := fun _ => B.hom A
    ket := fun _ => Hom.id _
    bra := fun _ => Hom.id _
    resolves := by
      intro n x
      change ((internalHomRepresentable A B.toModule).obj n).HasSum
        (fun _ : PUnit => x) x
      exact
        ((internalHomRepresentable A B.toModule).obj n).summation.singleton x }

```

#### 4.4.326 Closed term internal morphism representable of the module

**Statement.** For a natural number  $A$ :  $(\text{closedInternalHomRepresentable } A \ B) . \text{module}$  equals the internal morphism representable of  $A$  and the passage to superoperator module of  $B$ .

**Proof.** By definition. Unfolding the module turns the left-hand side,  $(\text{closedInternalHomRepresentable } A \ B) . \text{module}$ , into the right-hand side, the internal morphism representable of  $A$  and the passage to superoperator module of  $B$ ; the two sides are the same term.

**Lean 4 source** [QLambda/Domain/Presheaf/ClosedGenerated.lean](#)

```

theorem closedInternalHomRepresentable_module
  (A : Nat) (B : ClosedCoefficient) :
  (closedInternalHomRepresentable A B).module =
    internalHomRepresentable A B.toModule :=
  rfl

```

#### 4.4.327 A commutative comonoid in specialized modules, with comultiplication landing in the genuine Day tensor

**Definition.** A commutative comonoid in specialized modules, with comultiplication landing in the genuine Day tensor.

**Construction.** An element consists of carrier, counit, comult, left\_counit, right\_counit and coassociative, subject to the laws cocommutative.

**Lean 4 source** [QLambda/Domain/Presheaf/Comonoid.lean](#)

```

structure Comonoid where
  carrier : Module
  counit : Hom carrier dayTensorUnit
  comult : Hom carrier (dayTensor carrier carrier)
  left_counit :
    Hom.comp (DayTensor.leftUnitor carrier)
      (Hom.comp (DayTensor.map counit (Hom.id carrier)) comult) =
    Hom.id carrier
  right_counit :

```

```

Hom.comp (DayTensor.rightUnitor carrier)
  (Hom.comp (DayTensor.map (Hom.id carrier) counit) comult) =
  Hom.id carrier
coassociative :
Hom.comp (DayTensor.associator carrier carrier carrier)
  (Hom.comp (DayTensor.map comult (Hom.id carrier)) comult) =
  Hom.comp (DayTensor.map (Hom.id carrier) comult) comult
cocommutative :
Hom.comp (DayTensor.braiding carrier carrier) comult = comult

```

#### 4.4.328 Morphisms of commutative comonoids: underlying module maps preserving counit and comultiplication

**Definition.** Morphisms of commutative comonoids: underlying module maps preserving counit and comultiplication.

**Construction.** An element consists of `preserves_comult`, subject to the laws `hom` and `preserves_counit`.

**Lean 4 source** [QLambda/Domain/Presheaf/ComonoidHom.lean](#)

```

structure ComonoidHom (C D : Comonoid) where
  hom : Hom C.carrier D.carrier
  preserves_counit :
    Hom.comp D.counit hom = C.counit
  preserves_comult :
    Hom.comp D.comult hom =
      Hom.comp (DayTensor.map hom hom) C.comult

```

#### 4.4.329 Extensionality for comonoid morphisms

**Statement.** For comonoids  $C, D$ : if  $f.hom = g.hom$ , then  $f = g$ . Formally:  $f = g$ .

**Proof.** By case analysis on  $f$ .

**Lean 4 source** [QLambda/Domain/Presheaf/ComonoidHom.lean](#)

```

theorem ext {C D : Comonoid} {f g : ComonoidHom C D}
  (h : f.hom = g.hom) : f = g := by
  cases f
  cases g
  cases h
  rfl

```

#### 4.4.330 Definition of the comonoid morphism of the identity

**Definition.** The identity of  $C$  is a comonoid morphism from  $C$  to  $C$ .

**Construction.** Constructed by supplying each component: morphism, preserves counit and preserves comultiplication. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/Presheaf/ComonoidHom.lean](#)

```
def id (C : Comonoid) : ComonoidHom C C where
  hom := Hom.id C.carrier
  preserves_counit := by simp
  preserves_comult := by simp [DayTensor.map_id]
```

#### 4.4.331 Definition of the composition of comonoid morphisms

**Definition.** The composition of  $g$  and  $f$  is a comonoid morphism from  $C$  to  $E$ .

**Construction.** Constructed by supplying each component: morphism, preserves counit and preserves comultiplication. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/Presheaf/ComonoidHom.lean](#)

```
def comp {C D E : Comonoid}
  (g : ComonoidHom D E) (f : ComonoidHom C D) :
  ComonoidHom C E where
  hom := Hom.comp g.hom f.hom
  preserves_counit := by
    rw [Hom.comp_assoc, g.preserves_counit, f.preserves_counit]
  preserves_comult := by
    rw [Hom.comp_assoc, g.preserves_comult, <- Hom.comp_assoc,
        f.preserves_comult, Hom.comp_assoc, DayTensor.map_comp]
```

#### 4.4.332 Identity of the morphism

**Statement.** For a comonoid  $C$ :  $(\text{id } C) . \text{hom}$  equals the identity of the carrier of  $C$ .

**Proof.** By definition. Unfolding the morphism turns the left-hand side,  $(\text{id } C) . \text{hom}$ , into the right-hand side, the identity of the carrier of  $C$ ; the two sides are the same term.

**Lean 4 source** [QLambda/Domain/Presheaf/ComonoidHom.lean](#)

```
theorem id_hom (C : Comonoid) : (id C).hom = Hom.id C.carrier :=
  rfl
```

#### 4.4.333 Composition of the morphism

**Statement.** For comonoids  $C, D, E$ :  $(\text{comp } g \ f) . \text{hom}$  equals the composite of the morphism of  $g$  after the morphism of  $f$ .

**Proof.** By definition. Unfolding the morphism turns the left-hand side,  $(\text{comp } g \ f) . \text{hom}$ , into the right-hand side, the composite of the morphism of  $g$  after the morphism of  $f$ ; the two sides are the same term.

**Lean 4 source** [QLambda/Domain/Presheaf/ComonoidHom.lean](#)

```
theorem comp_hom {C D E : Comonoid}
  (g : ComonoidHom D E) (f : ComonoidHom C D) :
  (comp g f).hom = Hom.comp g.hom f.hom :=
  rfl
```

#### 4.4.334 Gate 8: raw all-dimensional Day-bang carrier bound fails at one qubit

**Statement.** Gate 8: raw all-dimensional Day-bang carrier bound fails at one qubit. Formally:  $\neg \text{BangSplitEffectAdmissible } 2$ .

**Proof.** This is an instance of the fact that the global raw split-effect bound fails at  $A = 2$ .

**Lean 4 source** `QLambda/Domain/Presheaf/DayBangBoundary.lean`

```
theorem day_bang_raw_global_bound_fails_at_two :  
  not BangSplitEffectAdmissible 2 :=  
  bangSplitEffectAdmissible_excludes_identity_two
```

#### 4.4.335 Positive low-dimensional bang components remain available

**Statement.** Positive low-dimensional bang components remain available. Formally:  $\text{BangComultComponentsAdmissible } 0 \wedge \text{BangComultComponentsAdmissible } 1$ .

**Proof.** The witness is assembled directly from its components, using the fact that mixed-partition admissibility holds for  $A = 0$ .

**Lean 4 source** `QLambda/Domain/Presheaf/DayBangBoundary.lean`

```
theorem day_bang_components_ok_zero_one :  
  BangComultComponentsAdmissible 0 /\ BangComultComponentsAdmissible 1 :=  
  <bangComultComponentsAdmissible_zero, bangComultComponentsAdmissible_one>
```

#### 4.4.336 Architecture decision record: $A \leq 1$ bang is kernel-checked

**Definition.** Architecture decision record:  $A \leq 1$  bang is kernel-checked;  $A=2$  raw global bound fails; Day transfer into TNI Day admissibility is not constructed.

**Construction.** Defined by an explicit formula built from the exponential comultiplication components admissibility and the exponential split effect admissibility.

**Lean 4 source** `QLambda/Domain/Presheaf/DayBangBoundary.lean`

```
def DayBangArchitectureBoundary : Prop :=  
  BangComultComponentsAdmissible 0 /\  
  BangComultComponentsAdmissible 1 /\  
  not BangSplitEffectAdmissible 2
```

#### 4.4.337 The Day exponential modality architecture boundary

**Statement.** `DayBangArchitectureBoundary`. Formally: `DayBangArchitectureBoundary`.

**Proof.** The witness is assembled directly from its components, using the fact that mixed-partition admissibility holds for  $A = 0$ .

**Lean 4 source** `QLambda/Domain/Presheaf/DayBangBoundary.lean`

```
theorem day_bang_architecture_boundary : DayBangArchitectureBoundary :=  
  <bangComultComponentsAdmissible_zero,  
    bangComultComponentsAdmissible_one,  
    bangSplitEffectAdmissible_excludes_identity_two>
```

#### 4.4.338 Conditional TNI no-go bridge (witness not constructed)

**Statement.** Conditional TNI no-go bridge (witness not constructed). Formally:  $\text{DayBangArchitectureBoundary} \wedge (\text{BangComultDayTransferWitness} \rightarrow \neg \text{BangComultComponentsAdmissible } 2)$ .

**Proof.** The witness is assembled directly from its components, using the Day exponential modality architecture boundary.

**Lean 4 source** `QLambda/Domain/Presheaf/DayBangBoundary.lean`

```
theorem trackL_requires_day_bang_resolution :
  DayBangArchitectureBoundary /\
    (BangComultDayTransferWitness ->
      not BangComultComponentsAdmissible 2) :=
  <day_bang_architecture_boundary,
    bangComultDayTransferWitness_not_admissible>

/-! ## L8 replacement: ambient CP Day-bang category -/
```

#### 4.4.339 Smallest named replacement category for the A=2 Day-bang gate

**Definition.** Smallest named replacement category for the A=2 Day-bang gate: specialized modules whose fibers are unrestricted CP maps (`cpmModule`), with Bool-add and joint action at every dimension.

**Construction.** Defined by an explicit formula built from the additive summability, the CP-map module and the dimension-indexed action sum.

**Lean 4 source** `QLambda/Domain/Presheaf/DayBangBoundary.lean`

```
def AmbientCPDayBangCategory : Prop :=
  (forall B n : Nat, Fiber.HasSumAdd ((cpmModule B).obj n)) /\
  (forall B : Nat, HasActSumFromDim (cpmModule B))
```

#### 4.4.340 Ambient CP Day exponential category

**Statement.** `AmbientCPDayBangCategory`. Formally: `AmbientCPDayBangCategory`.

**Proof.** The witness is assembled directly from its components.

**Lean 4 source** `QLambda/Domain/Presheaf/DayBangBoundary.lean`

```
theorem ambientCPDayBangCategory : AmbientCPDayBangCategory :=
  <fun B n => Fiber.HasSumAdd.cpmModule B n,
    fun B => HasActSumFromDim.cpmModule B>
```

#### 4.4.341 Ambient-CP fibers always admit the Bool pair demanded by the witness

**Statement.** Ambient-CP fibers always admit the Bool pair demanded by the witness.

**Proof.** This is an instance of the fact that CPM fibers admit Bool-split sums (unrestricted CP addition).

**Lean 4 source** `QLambda/Domain/Presheaf/DayBangBoundary.lean`

```

theorem cpm_target_cannot_supply_day_transfer_pair
  (B : Nat)
  (z_0_1 z_1_0 :
    ((cpmModule B).obj (tensorPowerDimension 2 1)).Carrier) :
  exists ? :
    ((cpmModule B).obj (tensorPowerDimension 2 1)).Carrier,
    ((cpmModule B).obj (tensorPowerDimension 2 1)).HasSum
    (fun i : Bool => bif i then z_0_1 else z_1_0) ? :=
  Fiber.HasSumAdd.cpmModule B _ z_0_1 z_1_0

/-! ## L9: relative AmbientCP bang admissibility -/

```

#### 4.4.342 Admissibility of the Day of the exponential modality of the linear 9 of the ambient CP of the exponential modality

**Statement.** L9 acceptance (relative AmbientCP, positive): Gate-8 category, relative admissibility for  $A \leq 1$ , ambient-CP degree-row gate at  $A = 2$ , AmbientCPComonoid packaging for  $A \leq 1$ , and the precise rectangle no-go blocking  $A=1$ -style glue at 2. Absolute BangComultComponentsAdmissible 2 and glued BangComultAmbientCPAdmissible 2 remain deferred (see day\_bang\_l9\_ambientCP\_row\_glue\_deferred).

**Proof.** The witness is assembled directly from its components, using the ambient CP Day exponential category.

#### Lean 4 source QLambda/Domain/Presheaf/DayBangBoundary.lean

```

theorem day_bang_l9_ambientCP_bang_admissible :
  AmbientCPDayBangCategory /\
    BangComultAmbientCPAdmissible 0 /\
    BangComultAmbientCPAdmissible 1 /\
    BangComultAmbientCPDegreeRowAdmissible 2 /\
    not BangDegreeUnitRectangleHasSum 2 /\
    (forall A <= 1, Nonempty AmbientCPComonoid) /\
    ((BangComultDayTransferWitness ->
      not BangComultComponentsAdmissible 2) /\
      (forall A, BangComultComponentsAdmissible A ->
        BangComultAmbientCPAdmissible A)) :=
  <ambientCPDayBangCategory,
    bangComultAmbientCPAdmissible_zero,
    bangComultAmbientCPAdmissible_one,
    bangComultAmbientCP_degree_row_admissible_two,
    not_bangDegreeUnitRectangleHasSum_two,
    ambientCPBangComonoid_of_le_one,
    day_bang_l9_absolute_bangComult_two_not_claimed>

```

#### 4.4.343 Route A fragment acceptance is independent of the A=2 Day-bang obstruction

**Statement.** Route A fragment acceptance is independent of the A=2 Day-bang obstruction. Formally: RouteASucceeded  $\wedge \neg$  BangSplitEffectAdmissible 2.

**Proof.** The witness is assembled directly from its components, using the route-A fragment model of the succeeded.

#### Lean 4 source `QLambda/Domain/Presheaf/DayBangBoundary.lean`

```
theorem routeA_independent_of_day_bang_two :
  RouteASucceeded /\ not BangSplitEffectAdmissible 2 :=
  <routeA_succeeded, day_bang_raw_global_bound_fails_at_two>
```

#### 4.4.344 Exact interface for general Day monoidal closure

**Definition.** Exact interface for general Day monoidal closure. The representable results above instantiate each field on the elementary fragment. `DayCoend.lean` constructs the general enriched coend quotient and provides a concrete value of this structure.

**Construction.** An element consists of `tensor`, `internalHom` and `closed`.

#### Lean 4 source `QLambda/Domain/Presheaf/DayClosedPresentation.lean`

```
structure DayClosedPresentation where
  tensor :
    (M N : Module) -> DayTensorPresentation M N
  internalHom :
    Module -> Module -> Module
  closed :
    forall (X A N : Module),
      Hom (tensor X A).object N ? Hom X (internalHom A N)
```

#### 4.4.345 Raw terms for the coend at an input dimension $n$

**Definition.** Raw terms for the coend at an input dimension  $n$ . Arbitrary countable sums are represented by natural-number sums; `extend` below turns every countable family into one of these without changing its sum.

**Construction.** Generated by the rules `zero`, `generator` and `sum`. Every element arises from finitely many applications of these rules, so properties are proved by induction over them.

#### Lean 4 source `QLambda/Domain/Presheaf/DayCoend.lean`

```
inductive Raw (M N : Module.{0}) (n : Nat) where
  | zero
  | generator {a b : Nat}
    (x : (M.obj a).Carrier) (y : (N.obj b).Carrier)
    (h : Superoperator n (a * b))
  | sum (f : Nat -> Raw M N n)
```

#### 4.4.346 Relational evaluation of a raw coend term

**Definition.** Relational evaluation of a raw coend term.

**Construction.** Generated by the rules `zero`, `generator` and `sum`. Every element arises from finitely many applications of these rules, so properties are proved by induction over them.

#### Lean 4 source `QLambda/Domain/Presheaf/DayCoend.lean`

```

inductive Eval {M N L : Module.{0}} (b : Bilinear M N L) {n : Nat} :
  Raw M N n -> (L.obj n).Carrier -> Prop where
| zero : Eval b .zero 0
| generator {a b} (x : (M.obj a).Carrier) (y : (N.obj b).Carrier)
  (h : Superoperator n (a * b)) :
  Eval b (.generator x y h) (L.act (b.app x y) h)
| sum (f : Nat -> Raw M N n) (v : Nat -> (L.obj n).Carrier)
  (z : (L.obj n).Carrier) :
  (forall i, Eval b (f i) (v i)) ->
  (L.obj n).HasSum v z ->
  Eval b (.sum f) z

```

#### 4.4.347 Terms retained by the coend are precisely those with a unique value in every bilinear interpretation

**Definition.** Terms retained by the coend are precisely those with a unique value in every bilinear interpretation.

**Construction.** Defined to be  $\forall L \beta, \exists! z : (L.obj n).Carrier, Eval \beta t z$ .

**Lean 4 source** [QLambda/Domain/Presheaf/DayCoend.lean](#)

```

def Admissible {M N : Module.{0}} {n : Nat} (t : Raw M N n) : Prop :=
  forall (L : Module.{0}) (b : Bilinear M N L),
    exists ! z : (L.obj n).Carrier, Eval b t z

```

#### 4.4.348 Definition of the hereditary

**Definition.** Hereditary admissibility ensures that operations defined recursively on terms (in particular the presheaf action) remain admissible.

**Construction.** Defined by cases on the input:  $.zero \mapsto \text{True}$ ;  $.generator \_ \_ \_ \mapsto \text{True}$ ;  $.sum f \mapsto \forall i, (f i).Hereditary \wedge (f i).Admissible$ .

**Lean 4 source** [QLambda/Domain/Presheaf/DayCoend.lean](#)

```

def Hereditary {M N : Module.{0}} {n : Nat} : Raw M N n -> Prop
| .zero => True
| .generator _ _ _ => True
| .sum f => forall i, (f i).Hereditary /\ (f i).Admissible

```

#### 4.4.349 Admissibility of zero for raw Day coend expressions

**Statement.** For superoperator modules  $M, N$ , a natural number  $n$ :  $.zero$  is admissible.

**Proof.** Each component of the claim is established separately. The hypotheses are unpacked into their constituent data.

**Lean 4 source** [QLambda/Domain/Presheaf/DayCoend.lean](#)

```

theorem admissible_zero {M N : Module} {n : Nat} :
  Admissible (.zero : Raw M N n) := by
  intro L b

```



```

refine <0, .zero, ?_>
intro z hz
cases hz
rfl

```

#### 4.4.350 Admissibility of the generator for raw Day coend expressions

**Statement.** For superoperator modules  $M, N$ , natural numbers  $n, a, b$ : if  $\text{Superoperator } n \ (a * b)$ , then  $\text{.generator } x \ y \ h$  is admissible.

**Proof.** Each component of the claim is established separately. The hypotheses are unpacked into their constituent data.

##### Lean 4 source `QLambda/Domain/Presheaf/DayCoend.lean`

```

theorem admissible_generator {M N : Module} {n a b : Nat}
  (x : (M.obj a).Carrier) (y : (N.obj b).Carrier)
  (h : Superoperator n (a * b)) :
  Admissible (.generator x y h) := by
  intro L b
  refine <L.act (b.app x y) h, .generator x y h, ?_>
  intro z hz
  cases hz
  rfl

```

#### 4.4.351 The uniquely determined value of an admissible term

**Definition.** The uniquely determined value of an admissible term.

**Construction.** Defined to be the choose of the  $\text{ht}$  of  $L$  and  $\beta$ .

##### Lean 4 source `QLambda/Domain/Presheaf/DayCoend.lean`

```

noncomputable def value {M N : Module} {n : Nat}
  (t : Raw M N n) (ht : Admissible t)
  (L : Module) (b : Bilinear M N L) : (L.obj n).Carrier :=
  Classical.choose (ht L b)

```

#### 4.4.352 Evaluation of the value for raw Day coend expressions

**Statement.** For superoperator modules  $M, N, L$ , a natural number  $n$ : if  $t$  is admissible, then  $\text{Eval } \beta \ t \ (\text{value } t \ \text{ht } L \ \beta)$ .

**Proof.** The proof term combines the facts named in it directly.

##### Lean 4 source `QLambda/Domain/Presheaf/DayCoend.lean`

```

theorem eval_value {M N : Module} {n : Nat}
  (t : Raw M N n) (ht : Admissible t)
  (L : Module) (b : Bilinear M N L) :
  Eval b t (value t ht L b) :=
  (Classical.choose_spec (ht L b)).1

```

#### 4.4.353 Uniqueness of the evaluation

**Statement.** For superoperator modules  $M, N, L$ , a natural number  $n$ : if  $t$  is admissible and  $\text{Eval } \beta \ t \ z$ , then  $z = \text{value } t \ \text{ht } L \ \beta$ .

**Proof.** The proof term combines the facts named in it directly.

**Lean 4 source** `QLambda/Domain/Presheaf/DayCoend.lean`

```
theorem eval_unique {M N : Module} {n : Nat}
  (t : Raw M N n) (ht : Admissible t)
  (L : Module) (b : Bilinear M N L)
  {z : (L.obj n).Carrier} (hz : Eval b t z) :
  z = value t ht L b :=
  (Classical.choose_spec (ht L b)).2 z hz
```

#### 4.4.354 Case analysis for the evaluation of a finite sum

**Statement.** For superoperator modules  $M, N, L$ , a natural number  $n$ : if  $\text{Eval } \beta \ (. \text{sum } f) \ z$ , then there is  $v$  such that for every  $i$ ,  $\text{Eval } \beta \ (f \ i) \ (v \ i)$  and the family  $v$  sums to  $z$ .

**Proof.** By case analysis on the derivation that  $\text{Eval } \beta \ (. \text{sum } f) \ z$ . For a sum, the claim is checked directly.

**Lean 4 source** `QLambda/Domain/Presheaf/DayCoend.lean`

```
theorem eval_sum_cases {M N L : Module} {n : Nat}
  (b : Bilinear M N L) (f : Nat -> Raw M N n)
  {z : (L.obj n).Carrier} (h : Eval b (.sum f) z) :
  exists v, (forall i, Eval b (f i) (v i)) /\ (L.obj n).HasSum v z := by
  cases h with
  | sum _ v _ hv hs => exact <v, hv, hs>
```

#### 4.4.355 Contravariant action on raw coend terms

**Definition.** Contravariant action on raw coend terms.

**Construction.** Defined by cases on the input:  $. \text{zero} \mapsto$  the zero;  $. \text{generator } x \ y \ h \mapsto$  the generator of  $x, y$ , the composite of  $h$  after  $g$ ;  $. \text{sum } f \mapsto$  the sum of  $\text{fun } i \Rightarrow \text{map } g \ (f \ i)$ .

**Lean 4 source** `QLambda/Domain/Presheaf/DayCoend.lean`

```
noncomputable def map {M N : Module} {m n : Nat} (g : Superoperator m n) :
  Raw M N n -> Raw M N m
| .zero => .zero
| .generator x y h => .generator x y (Superoperator.comp h g)
| .sum f => .sum (fun i => map g (f i))
```

#### 4.4.356 Evaluation of a mapped family for raw Day coend expressions

**Statement.** For superoperator modules  $M, N, L$ , natural numbers  $m, n$ , a superoperator  $g$ : if  $\text{Eval } \beta \ t \ z$ , then  $\text{Eval } \beta \ (\text{map } g \ t) \ (L.\text{act } z \ g)$ .

**Proof.** By induction on the derivation that  $\text{Eval } \beta \ t \ z$ . For zero and a generator, the claim is checked directly; for a sum, the claim follows from the induction hypothesis. The key step rewrites with the definition of the functorial action, the definition of the zero and the definition of the sum.

#### Lean 4 source `QLambda/Domain/Presheaf/DayCoend.lean`

```
theorem eval_map {M N L : Module} {m n : Nat}
  (b : Bilinear M N L) (g : Superoperator m n)
  {t : Raw M N n} {z : (L.obj n).Carrier}
  (h : Eval b t z) :
  Eval b (map g t) (L.act z g) := by
  induction h with
  | zero =>
    rw [L.act_zero_element]
    exact Eval.zero
  | generator x y h =>
    simpa [map, L.act_comp] using
      (Eval.generator (b := b) x y (Superoperator.comp h g))
  | sum f v z hv hs ih =>
    exact Eval.sum _ (fun i => L.act (v i) g) _ ih
    (L.act_sum_element g hs)
```

#### 4.4.357 Admissibility of a mapped family for raw Day coend expressions

**Statement.** For superoperator modules  $M, N$ , natural numbers  $m, n$ , a superoperator  $g$ : if  $t$  is admissible and  $t$ .Hereditary, then  $\text{map } g \ t$  is admissible.

**Proof.** By induction on  $t$ . For zero and a generator, the claim is checked directly; for a sum, the claim follows from the induction hypothesis. The key step rewrites with the definition of the functorial action.

#### Lean 4 source `QLambda/Domain/Presheaf/DayCoend.lean`

```
theorem admissible_map {M N : Module} {m n : Nat}
  (g : Superoperator m n) (t : Raw M N n)
  (ht : t.Admissible) (hh : t.Hereditary) :
  (map g t).Admissible := by
  induction t with
  | zero => simpa [map] using (admissible_zero (M := M) (N := N) (n := m))
  | generator x y h =>
    simpa [map] using admissible_generator x y (Superoperator.comp h g)
  | sum f ih =>
    intro L b
    let z := value (.sum f) ht L b
    refine <L.act z g, eval_map b g (eval_value (.sum f) ht L b), ?_>
    intro w hw
    obtain <v, hv, hvs> := eval_sum_cases b _ hw
    have hz := eval_value (.sum f) ht L b
    obtain <u, hu, hus> := eval_sum_cases b f hz
    have hvu : v = fun i => L.act (u i) g := by
      funext i
      exact (ih i (hh i).2 (hh i).1 L b).unique
      (hv i) (eval_map b g (hu i))
    rw [hvu] at hvs
    exact (L.obj m).summation.unique hvs (L.act_sum_element g hus)
```

#### 4.4.358 Hereditary of a mapped family for raw Day coend expressions

**Statement.** For superoperator modules  $M, N$ , natural numbers  $m, n$ , a superoperator  $g$ : if  $t$ .Hereditary, then  $(\text{map } g \ t)$ .Hereditary.

**Proof.** By induction on  $t$ . The cases of zero and a generator are immediate; for a sum, the claim follows from the induction hypothesis.

**Lean 4 source** [QLambda/Domain/Presheaf/DayCoend.lean](#)

```
theorem hereditary_map {M N : Module} {m n : Nat}
  (g : Superoperator m n) (t : Raw M N n)
  (hh : t.Hereditary) :
  (map g t).Hereditary := by
  induction t with
  | zero => trivial
  | generator => trivial
  | sum f ih =>
    intro i
    exact <ih i (hh i).1,
      admissible_map g (f i) (hh i).2 (hh i).1>
```

#### 4.4.359 An admissible raw term

**Definition.** An admissible raw term.

**Construction.** Constructed by supplying each component of the structure explicitly.

**Lean 4 source** [QLambda/Domain/Presheaf/DayCoend.lean](#)

```
abbrev Term (M N : Module.{0}) (n : Nat) :=
  {t : Raw M N n // t.Admissible /\ t.Hereditary}
```

#### 4.4.360 Definition of the value of terms

**Definition.** The value of  $t, L$  and  $\beta$  is an element of  $(L.\text{obj } n).\text{Carrier}$ .

**Construction.** Defined to be the value of the  $l, L, \beta$ .

**Lean 4 source** [QLambda/Domain/Presheaf/DayCoend.lean](#)

```
noncomputable def value {M N : Module} {n : Nat}
  (t : Term M N n) (L : Module) (b : Bilinear M N L) :
  (L.obj n).Carrier :=
  t.1.value t.2.1 L b
```

#### 4.4.361 Semantic equivalence is equality in every bilinear interpretation

**Definition.** Semantic equivalence is equality in every bilinear interpretation.

**Construction.** Defined to be  $\forall L \ \beta, \ s.\text{value } L \ \beta = t.\text{value } L \ \beta$ .

**Lean 4 source** [QLambda/Domain/Presheaf/DayCoend.lean](#)

```
def Equivalent {M N : Module} {n : Nat}
  (s t : Term M N n) : Prop :=
  forall (L : Module) (b : Bilinear M N L), s.value L b = t.value L b
```

#### 4.4.362 Evaluation of zero for Day coends

**Statement.** For superoperator modules  $M, N, L$ , a natural number  $n$ : the evaluation of  $L$  and  $\beta$  at 0 equals 0.

**Proof.** It follows from the uniqueness of the evaluation.

**Lean 4 source** [QLambda/Domain/Presheaf/DayCoendSum.lean](#)

```
theorem evaluate_zero {M N L : Module} {n : Nat}
  (b : Bilinear M N L) :
  evaluate L b (0 : Carrier M N n) = 0 := by
  change (zeroTerm M N n).value L b = 0
  exact (Raw.eval_unique _ Raw.admissible_zero L b Raw.Eval.zero).symm
```

#### 4.4.363 A fixed embedding of a countable type into the naturals

**Definition.** A fixed embedding of a countable type into the naturals.

**Construction.** Constructed by supplying each component of the structure explicitly.

**Lean 4 source** [QLambda/Domain/Presheaf/DayCoendSum.lean](#)

```
noncomputable def countableEmbedding (a : Type) [Countable a] : a ? Nat :=
  <Classical.choose (Countable.exists_injective_nat a),
  Classical.choose_spec (Countable.exists_injective_nat a)>
```

#### 4.4.364 Extend a countable family by zero along a fixed encoding

**Definition.** Extend a countable family by zero along a fixed encoding.

**Construction.** The map sending  $k$  to an explicit expression in the countable embedding.

**Lean 4 source** [QLambda/Domain/Presheaf/DayCoendSum.lean](#)

```
noncomputable def extend {a : Type} [Countable a] {X : Type} [Zero X]
  (f : a -> X) : Nat -> X :=
  fun k => if h : exists i, countableEmbedding a i = k
  then f (Classical.choose h) else 0
```

#### 4.4.365 Extend of the encode for Day coends

**Statement.** The extend of  $f$  and the countable embedding of  $\alpha$  and  $i$  equals the  $f$  of  $i$ .

**Proof.** The key step rewrites with the definition of the extend.

**Lean 4 source** [QLambda/Domain/Presheaf/DayCoendSum.lean](#)

```

private theorem extend_encode {a : Type} [Countable a]
  {X : Type} [Zero X] (f : a → X) (i : a) :
  extend f (countableEmbedding a i) = f i := by
  rw [extend]
  simp only [dite_eq_left
    (show exists j : a, countableEmbedding a j = countableEmbedding a i
      from <i, rfl>)]
  have hc := Classical.choose_spec
    (show exists j, countableEmbedding a j = countableEmbedding a i from <i, rfl>)
  have hi := (countableEmbedding a).injective hc
  rw [hi]

```

#### 4.4.366 Characterization of the extend of the summability

**Statement.** The family `extend f` sums to `s` if and only if the family `f` sums to `s`.

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the definition of the `extend`, the `extend` of the `encode` for Day coends, the fact that observational equality is symmetric and the fact that observational equality is transitive.

#### Lean 4 source `QLambda/Domain/Presheaf/DayCoendSum.lean`

```

private theorem extend_hasSum_iff {a : Type} [Countable a]
  (X : Fiber) (f : a → X.Carrier) (s : X.Carrier) :
  X.HasSum (extend f) s <=> X.HasSum f s := by
  let e : a → Set.range (countableEmbedding a) :=
    Equiv.ofInjective (countableEmbedding a) (countableEmbedding a).injective
  have hz :
    forall k, k ∉ Set.range (countableEmbedding a) →
      extend f k = 0 := by
    intro k hk
    rw [extend, dite_eq_right]
    intro h
    exact hk h
  have hr :=
    X.summation.remove_zero (extend f)
      (Set.range (countableEmbedding a)) s hz
  have he :
    X.HasSum
      (fun k : Set.range (countableEmbedding a) => extend f k) s <=>
      X.HasSum f s := by
    have hre := X.summation.reindex e
      (fun k : Set.range (countableEmbedding a) => extend f k) s
    have hfun :
      (fun k : Set.range (countableEmbedding a) => extend f k) comp e = f := by
      funext i
      exact extend_encode f i
    rw [hfun] at hre
    exact hre.symm
  exact hr.symm.trans he

```

#### 4.4.367 The partial sum on the semantic quotient is tested in every target

**Definition.** The partial sum on the semantic quotient is tested in every target. This is what makes all bilinear interpretations sum preserving by construction.

**Construction.** Defined to be  $\forall L \beta, (L.obj\ n).HasSum\ (fun\ i \Rightarrow evaluate\ L\ \beta\ (f\ i))\ (evaluate\ L\ \beta\ s)$ .

#### Lean 4 source `QLambda/Domain/Presheaf/DayCoendSum.lean`

```
def HasSum {M N : Module} {α : Type} [Countable α] {n : Nat}
  (f : α → Carrier M N n) (s : Carrier M N n) : Prop :=
  forall (L : Module) (b : Bilinear M N L),
    (L.obj n).HasSum (fun i => evaluate L b (f i)) (evaluate L b s)
```

#### 4.4.368 Definition of the representative of Day coends

**Definition.** The representative of  $x$  is a term.

**Construction.** Defined to be the out of  $x$ .

#### Lean 4 source `QLambda/Domain/Presheaf/DayCoendSum.lean`

```
private noncomputable def representative {M N : Module} {n : Nat}
  (x : Carrier M N n) : Term M N n :=
  Quotient.out x
```

#### 4.4.369 Construction of the representative for Day coends

**Statement.** For superoperator modules  $M, N$ , a natural number  $n$ : the construction of  $\_$  and the representative of  $x$  equals  $x$ .

**Proof.** This is an instance of standard identities for quotients.

#### Lean 4 source `QLambda/Domain/Presheaf/DayCoendSum.lean`

```
private theorem mk_representative {M N : Module} {n : Nat}
  (x : Carrier M N n) :
  Quotient.mk _ (representative x) = x :=
  Quotient.out_eq x
```

#### 4.4.370 Value of the representative for Day coends

**Statement.** For superoperator modules  $M, N, L$ , a natural number  $n$ :  $(representative\ x).value\ L\ \beta$  equals the evaluation of  $L, \beta, x$ .

**Proof.** The claim follows directly from the definitions of the objects involved.

#### Lean 4 source `QLambda/Domain/Presheaf/DayCoendSum.lean`

```
private theorem value_representative {M N L : Module} {n : Nat}
  (b : Bilinear M N L) (x : Carrier M N n) :
  (representative x).value L b = evaluate L b x := by
  have h := congrArg (evaluate L b) (mk_representative x)
  exact h
```

#### 4.4.371 Evaluation of the extend of the representative for Day coends

**Statement.** For superoperator modules  $M, N, L$ , natural numbers  $n, k$ : the displayed property holds.

**Proof.** The argument splits on the relevant condition. The goal is simplified using the definition of the extend and the value of the representative for Day coends.

##### Lean 4 source `QLambda/Domain/Presheaf/DayCoendSum.lean`

```
private theorem eval_extend_representative {M N L : Module}
  {? : Type} [Countable ?] {n : Nat}
  (b : Bilinear M N L) (f : ? -> Carrier M N n) (k : Nat) :
  Raw.Eval b
    (extend (fun i => (representative (f i)).1) k)
    (extend (fun i => evaluate L b (f i)) k) := by
  simp only [extend]
  split
  * rename_i h
    have hv := (representative (f (Classical.choose h))).1.eval_value
      (representative (f (Classical.choose h))).2.1 L b
    convert hv using 1
    exact (value_representative b _).symm
  * exact .zero
```

#### 4.4.372 Definition of the sum term of Day coends

**Definition.** The sum term of  $f$  is a raw Day coend expression.

**Construction.** Defined to be the sum of the extend of  $\text{fun } i \Rightarrow (\text{representative } (f \ i)).1$ .

##### Lean 4 source `QLambda/Domain/Presheaf/DayCoendSum.lean`

```
private noncomputable def sumTerm {M N : Module} {? : Type} [Countable ?]
  {n : Nat} (f : ? -> Carrier M N n) :
  Raw M N n :=
  .sum (extend (fun i => (representative (f i)).1))
```

#### 4.4.373 Sum term of the hereditary for Day coends

**Statement.** For superoperator modules  $M, N$ , a natural number  $n$ :  $(\text{sumTerm } f).Hereditary$ .

**Proof.** Each component of the claim is established separately. The argument splits on the relevant condition. The goal is simplified using the definition of the extend.

##### Lean 4 source `QLambda/Domain/Presheaf/DayCoendSum.lean`

```
private theorem sumTerm_hereditary {M N : Module}
  {? : Type} [Countable ?] {n : Nat}
  (f : ? -> Carrier M N n) :
  (sumTerm f).Hereditary := by
  intro k
  simp only [extend]
  split
  * exact <(representative _).2.2, (representative _).2.1>
  * exact <trivial, Raw.admissible_zero>
```



#### 4.4.374 Admissibility of the sum term

**Statement.** For superoperator modules  $M, N$ , a natural number  $n$ : if for every  $L, \beta$ , there is  $z$  such that the family  $\text{fun } i \Rightarrow \text{evaluate } L \ \beta \ (f \ i)$  sums to  $z$ , then  $\text{sumTerm } f$  is admissible.

**Proof.** Both sides are compared pointwise (by extensionality). Each component of the claim is established separately. The argument splits on the relevant condition. The hypotheses are unpacked into their constituent data. The key step rewrites with the definition of the extend, the definition of the sum, the evaluation of the extend of the representative for Day coends and the characterization of the extend of the summability.

#### Lean 4 source `QLambda/Domain/Presheaf/DayCoendSum.lean`

```
private theorem sumTerm_admissible_of {M N : Module}
  {? : Type} [Countable ?] {n : Nat}
  (f : ? -> Carrier M N n)
  (h : forall (L : Module) (b : Bilinear M N L),
    exists z, (L.obj n).HasSum
      (fun i => evaluate L b (f i)) z) :
  (sumTerm f).Admissible := by
  intro L b
  obtain <s, hs> := h L b
  refine <s, ?_, ?_>
  * apply Raw.Eval.sum _ (extend (fun i => evaluate L b (f i)))
  * exact eval_extend_representative b f
  * exact (extend_hasSum_iff (L.obj n)
    (fun i => evaluate L b (f i)) s).2 hs
  * intro z hz
  have hz' : Raw.Eval b
    (.sum (extend (fun i => (representative (f i)).1))) z := by
    simpa only [sumTerm] using hz
  obtain <v, hv, hvs> := Raw.eval_sum_cases b _ hz'
  have hvext :
    v = extend (fun i => evaluate L b (f i)) := by
    funext k
    specialize hv k
    simp only [extend] at hv |-
    by_cases hk : exists i, countableEmbedding ? i = k
    * simp only [dite_eq_left hk] at hv |-
      exact (representative (f (Classical.choose hk))).1.eval_unique
        (representative (f (Classical.choose hk))).2.1 L b hv |>.trans
          (value_representative b _)
    * simp only [dite_eq_right hk] at hv |-
      exact (Raw.eval_unique (.zero : Raw M N n) Raw.admissible_zero
        L b hv).trans
        (Raw.eval_unique (.zero : Raw M N n) Raw.admissible_zero
          L b Raw.Eval.zero).symm
  rw [hvext] at hvs
  exact (L.obj n).summation.unique hvs
  ((extend_hasSum_iff (L.obj n)
    (fun i => evaluate L b (f i)) s).2 hs)
```

#### 4.4.375 Admissibility of the sum term

**Statement.** For superoperator modules  $M, N$ , a natural number  $n$ : if the family  $f$  sums to  $s$ , then  $\text{sumTerm } f$  is admissible.

**Proof.** This is an instance of the admissibility of the sum term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayCoendSum.lean`

```
private theorem sumTerm_admissible {M N : Module} {? : Type} [Countable ?]
  {n : Nat} {f : ? -> Carrier M N n} {s : Carrier M N n}
  (h : HasSum f s) :
  (sumTerm f).Admissible :=
  sumTerm_admissible_of f fun L b => <evaluate L b s, h L b>
```

#### 4.4.376 Form the Day-coend sum of a family that admits a sum under every bilinear interpretation

**Definition.** Form the Day-coend sum of a family that admits a sum under every bilinear interpretation.

**Construction.** Defined by an explicit formula built from the sum term, the sum term admissibility of and the sum term hereditary.

**Lean 4 source** `QLambda/Domain/Presheaf/DayCoendSum.lean`

```
noncomputable def sumOfAdmissible {M N : Module}
  {? : Type} [Countable ?] {n : Nat}
  (f : ? -> Carrier M N n)
  (h : forall (L : Module) (b : Bilinear M N L),
    exists z, (L.obj n).HasSum
      (fun i => evaluate L b (f i)) z) :
  Carrier M N n :=
  Quotient.mk _ <sumTerm f, sumTerm_admissible_of f h,
    sumTerm_hereditary f>
```

#### 4.4.377 Evaluation of the sum of admissibility for Day coends

**Statement.** For superoperator modules  $M, N, L$ , a natural number  $n$ : if for every  $L, \beta$ , there is  $z$  such that the family  $\text{fun } i \Rightarrow \text{evaluate } L \beta (f i)$  sums to  $z$  and the family  $\text{fun } i \Rightarrow \text{evaluate } L \beta (f i)$  sums to  $z$ , then the evaluation of  $L, \beta$ , the sum of admissibility of  $f$  and  $h$  equals  $z$ .

**Proof.** It follows from the definition of the sum, the evaluation of the extend of the representative for Day coends, the characterization of the extend of the summability and the uniqueness of the evaluation.

**Lean 4 source** `QLambda/Domain/Presheaf/DayCoendSum.lean`

```
theorem evaluate_sumOfAdmissible {M N : Module}
  {? : Type} [Countable ?] {n : Nat}
  (f : ? -> Carrier M N n)
  (h : forall (L : Module) (b : Bilinear M N L),
    exists z, (L.obj n).HasSum
      (fun i => evaluate L b (f i)) z)
  (L : Module) (b : Bilinear M N L) (z : (L.obj n).Carrier)
  (hz : (L.obj n).HasSum (fun i => evaluate L b (f i)) z) :
  evaluate L b (sumOfAdmissible f h) = z := by
  change Term.value
```

```

    (<sumTerm f, sumTerm_admissible_of f h,
     sumTerm_hereditary f> : Term M N n) L b = z
have he : Raw.Eval b (sumTerm f) z := by
  apply Raw.Eval.sum _ (extend (fun i => evaluate L b (f i)))
  * exact eval_extend_representative b f
  * exact (extend_hasSum_iff (L.obj n)
    (fun i => evaluate L b (f i)) z).2 hz
exact (Raw.eval_unique (sumTerm f) (sumTerm_admissible_of f h)
  L b he).symm

```

#### 4.4.378 Specialization: the sum of a family that already has a coend summability witness

**Definition.** Specialization: the sum of a family that already has a coend HasSum witness.

**Construction.** Defined to be the sum of admissibility of  $f$  and  $\text{fun } L \beta \Rightarrow \langle \text{evaluate } L \beta \ s, h \ L \beta \rangle$ .

**Lean 4 source** [QLambda/Domain/Presheaf/DayCoendSum.lean](#)

```

noncomputable def sumElement {M N : Module}
  {? : Type} [Countable ?] {n : Nat}
  {f : ? -> Carrier M N n} {s : Carrier M N n}
  (h : HasSum f s) : Carrier M N n :=
  sumOfAdmissible f fun L b => <evaluate L b s, h L b>

```

#### 4.4.379 Evaluation of the sum element for Day coends

**Statement.** For superoperator modules  $M, N, L$ , a natural number  $n$ : if the family  $f$  sums to  $s$ , then the evaluation of  $L, \beta$ , the sum element of  $h$  equals the evaluation of  $L, \beta, s$ .

**Proof.** This is an instance of the evaluation of the sum of admissibility for Day coends.

**Lean 4 source** [QLambda/Domain/Presheaf/DayCoendSum.lean](#)

```

theorem evaluate_sumElement {M N : Module}
  {? : Type} [Countable ?] {n : Nat}
  {f : ? -> Carrier M N n} {s : Carrier M N n}
  (h : HasSum f s) (L : Module) (b : Bilinear M N L) :
  evaluate L b (sumElement h) = evaluate L b s :=
  evaluate_sumOfAdmissible f
    (fun L b => <evaluate L b s, h L b>)
    L b (evaluate L b s) (h L b)

```

#### 4.4.380 Extensionality for the quotient

**Statement.** For superoperator modules  $M, N$ , a natural number  $n$ : if for every  $L, \beta$ ,  $\text{evaluate } L \beta \ x = \text{evaluate } L \beta \ y$ , then  $x = y$ .

**Proof.** The key step rewrites with the construction of the representative for Day coends, the value of the representative for Day coends, standard identities for quotients and the hypothesis that for every  $L, \beta$ ,  $\text{evaluate } L \beta \ x = \text{evaluate } L \beta \ y$ .

**Lean 4 source** [QLambda/Domain/Presheaf/DayCoendSum.lean](#)

```

private theorem quotient_ext {M N : Module} {n : Nat}
  {x y : Carrier M N n}
  (h : forall (L : Module) (b : Bilinear M N L),
    evaluate L b x = evaluate L b y) : x = y := by
  rw [← mk_representative x, ← mk_representative y]
  apply Quotient.sound
  intro L b
  rw [value_representative, value_representative]
  exact h L b

```

#### 4.4.381 The semantic quotient is a genuine partial countable-sum algebra

**Definition.** The semantic quotient is a genuine partial countable-sum algebra.

**Construction.** Constructed by supplying each component: summability, uniqueness, empty, singleton, remove zero, reindexing and flatten. The accompanying laws are verified from the definitions.

#### Lean 4 source `QLambda/Domain/Presheaf/DayCoendSum.lean`

```

noncomputable def partialCountableSum (M N : Module) (n : Nat) :
  @SigmaMon.PartialCountableSum (Carrier M N n) <zero M N n> where
  HasSum := HasSum
  unique := by
    intro ? _ f a b ha hb
    apply quotient_ext
    intro L b
    exact (L.obj n).summation.unique (ha L b) (hb L b)
  empty := by
    intro L b
    convert (L.obj n).summation.empty using 1
    exact evaluate_zero b
  singleton := by
    intro a L b
    exact (L.obj n).summation.singleton _
  remove_zero := by
    intro ? _ f u a hz
    constructor <;> intro h L b
    * apply ((L.obj n).summation.remove_zero
      (fun i => evaluate L b (f i)) u (evaluate L b a) ?_).mp
    * exact h L b
    * intro i hi
      rw [hz i hi]
      exact evaluate_zero b
    * apply ((L.obj n).summation.remove_zero
      (fun i => evaluate L b (f i)) u (evaluate L b a) ?_).mpr
    * exact h L b
    * intro i hi
      rw [hz i hi]
      exact evaluate_zero b
  reindex := by
    intro ? ? _ _ e f a
    constructor <;> intro h L b
    * exact ((L.obj n).summation.reindex e
      (fun i => evaluate L b (f i)) (evaluate L b a)).mp (h L b)
    * exact ((L.obj n).summation.reindex e

```

```

      (fun i => evaluate L b (f i)) (evaluate L b a)).mpr (h L b)
flatten := by
  intro ? _ ? _ f a
  constructor
  * intro hflat
    have hexists (i : ?) (L : Module) (b : Bilinear M N L) :
      exists z, (L.obj n).HasSum
        (fun j => evaluate L b (f i j)) z := by
    obtain <v, hv, _> :=
      ((L.obj n).summation.flatten
        (fun i j => evaluate L b (f i j))
        (evaluate L b a)).mp (hflat L b)
    exact <v i, hv i>
  let g : ? -> Carrier M N n :=
    fun i => sumOfAdmissible (f i) (hexists i)
  have hrows : forall i, HasSum (f i) (g i) := by
    intro i L b
    obtain <v, hv, _> :=
      ((L.obj n).summation.flatten
        (fun i j => evaluate L b (f i j))
        (evaluate L b a)).mp (hflat L b)
    rw [show evaluate L b (g i) = v i from
      evaluate_sumOfAdmissible (f i) (hexists i) L b (v i) (hv i)]
    exact hv i
  refine <g, hrows, ?_>
  intro L b
  obtain <v, hv, hva> :=
    ((L.obj n).summation.flatten
      (fun i j => evaluate L b (f i j))
      (evaluate L b a)).mp (hflat L b)
  convert hva using 1
  funext i
  exact (evaluate_sumOfAdmissible (f i) (hexists i)
    L b (v i) (hv i))
  * rintro <g, hrows, hg> L b
    exact ((L.obj n).summation.flatten
      (fun i j => evaluate L b (f i j))
      (evaluate L b a)).mpr
      <fun i => evaluate L b (g i), fun i => hrows i L b, hg L b>

```

#### 4.4.382 Definition of the functorial action term of Day coends

**Definition.** The functorial action term of  $g$  and  $t$  is a term.

**Construction.** Constructed by supplying each component of the structure explicitly.

**Lean 4 source** [QLambda/Domain/Presheaf/DayCoendSum.lean](#)

```

private noncomputable def mapTerm {M N : Module} {m n : Nat}
  (g : Superoperator m n) (t : Term M N n) : Term M N m :=
  <Raw.map g t.1,
    Raw.admissible_map g t.1 t.2.1 t.2.2,
    Raw.hereditary_map g t.1 t.2.2>

```

#### 4.4.383 Value of the functorial action term for Day coends

**Statement.** For superoperator modules  $M, N, L$ , natural numbers  $m, n$ , a superoperator  $g$ :  $(\text{mapTerm } g \ t) \cdot \text{value } L \ \beta$  equals the act of the value of  $L$  and  $\beta$  and  $g$ .

**Proof.** It follows from the uniqueness of the evaluation.

**Lean 4 source** `QLambda/Domain/Presheaf/DayCoendSum.lean`

```
private theorem value_mapTerm {M N L : Module} {m n : Nat}
  (b : Bilinear M N L) (g : Superoperator m n)
  (t : Term M N n) :
  (mapTerm g t).value L b = L.act (t.value L b) g := by
  exact (Raw.eval_unique (Raw.map g t.1)
    (Raw.admissible_map g t.1 t.2.1 t.2.2) L b
    (Raw.eval_map b g (Raw.eval_value t.1 t.2.1 L b))).symm
```

#### 4.4.384 Presheaf action on the semantic coend

**Definition.** Presheaf action on the semantic coend.

**Construction.** Defined by an explicit formula built from the functorial action, the functorial action term, the introduction and the value functorial action term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayCoendSum.lean`

```
noncomputable def action {M N : Module} {m n : Nat}
  (x : Carrier M N n) (g : Superoperator m n) :
  Carrier M N m :=
  Quotient.map (mapTerm g) (by
    intro s t h L b
    rw [value_mapTerm, value_mapTerm, h L b]) x
```

#### 4.4.385 Evaluation of the action for Day coends

**Statement.** For superoperator modules  $M, N, L$ , natural numbers  $m, n$ , a superoperator  $g$ : the evaluation of  $L, \beta$ , the action of  $x$  and  $g$  equals the act of the evaluation of  $L, \beta, x$  and  $g$ .

**Proof.** The argument proceeds by induction. It follows from the value of the functorial action term for Day coends.

**Lean 4 source** `QLambda/Domain/Presheaf/DayCoendSum.lean`

```
theorem evaluate_action {M N L : Module} {m n : Nat}
  (b : Bilinear M N L) (x : Carrier M N n)
  (g : Superoperator m n) :
  evaluate L b (action x g) = L.act (evaluate L b x) g := by
  induction x using Quotient.inductionOn with
  | _ t => exact value_mapTerm b g t
```

#### 4.4.386 The genuine Day coend as a specialized superoperator module

**Definition.** The genuine Day coend as a specialized superoperator module.

**Construction.** Constructed by supplying each component: zero, summation, act, act zero element, act zero functorial action, act identity, act composite and act sum element, among others. The accompanying laws are verified from the definitions.

#### Lean 4 source `QLambda/Domain/Presheaf/DayCoendSum.lean`

```

noncomputable def module (M N : Module) : Module where
  obj n :=
    { Carrier := Carrier M N n
      zero := zero M N n
      summation := partialCountableSum M N n }
  act := action
  act_zero_element := by
    intro m n g
    apply quotient_ext
    intro L b
    rw [evaluate_action, evaluate_zero, L.act_zero_element, evaluate_zero]
  act_zero_map := by
    intro m n x
    apply quotient_ext
    intro L b
    rw [evaluate_action, L.act_zero_map, evaluate_zero]
  act_id := by
    intro n x
    apply quotient_ext
    intro L b
    rw [evaluate_action, L.act_id]
  act_comp := by
    intro ? m n x f g
    apply quotient_ext
    intro L b
    rw [evaluate_action, evaluate_action, evaluate_action, L.act_comp]
  act_sum_element := by
    intro ? _ m n x s g h L b
    simp only [evaluate_action]
    exact L.act_sum_element g (h L b)
  act_sum_map := by
    intro ? _ m n x f s h L b
    simp only [evaluate_action]
    exact L.act_sum_map (evaluate L b x) h
  act_sum_from_one := by
    intro ? _ m x s f hs
    have hadm :
      forall (L : Module) (b : Bilinear M N L),
        exists z, (L.obj m).HasSum
      (fun i => evaluate L b (action (x i) (f i))) z := by
      intro L b
      obtain <z, hz> := L.act_sum_from_one f (hs L b)
      exact <z, by simp [evaluate_action] using hz>
      refine <sumOfAdmissible (fun i => action (x i) (f i)) hadm, ?_>
      intro L b
      obtain <z, hz> := hadm L b
      have he := evaluate_sumOfAdmissible
        (fun i => action (x i) (f i)) hadm L b z hz
      simp [he] using hz
  act_sum_tensor_from_one := by

```

```

intro ? _ m B x s f hs
have hadm :
  forall (L : Module) (b : Bilinear M N L),
    exists z, (L.obj (m * B)).HasSum
      (fun i =>
        evaluate L b
          (action (x i)
            (Superoperator.tensor (f i)
              (Superoperator.identity B)))) z := by
intro L b
obtain <z, hz> :=
  L.act_sum_tensor_from_one f (hs L b)
exact <z, by simp [evaluate_action] using hz>
refine
  <sumOfAdmissible
    (fun i =>
      action (x i)
        (Superoperator.tensor (f i) (Superoperator.identity B)))
    hadm,
  ?_>
intro L b
obtain <z, hz> := hadm L b
have he :=
  evaluate_sumOfAdmissible
    (fun i =>
      action (x i)
        (Superoperator.tensor (f i) (Superoperator.identity B)))
    hadm L b z hz
simp [he] using hz

```

#### 4.4.387 A coend generator

**Definition.** A coend generator.

**Construction.** Defined by an explicit formula built from the admissibility generator.

**Lean 4 source** [QLambda/Domain/Presheaf/DayCoendSum.lean](#)

```

noncomputable def generator {M N : Module} {n a b : Nat}
  (x : (M.obj a).Carrier) (y : (N.obj b).Carrier)
  (h : Superoperator n (a * b)) :
  Carrier M N n :=
  Quotient.mk _ <.generator x y h,
  Raw.admissible_generator x y h, trivial>

```

#### 4.4.388 Evaluation of the generator for Day coends

**Statement.** For superoperator modules  $M, N, L$ , natural numbers  $n, a, b$ : if  $\text{Superoperator } n \ (a * b)$ , then the evaluation of  $L, \beta$ , the generator of  $x, y, h$  equals the act of  $\beta \cdot \text{app } x \ y$  and  $h$ .

**Proof.** It follows from the uniqueness of the evaluation.

**Lean 4 source** [QLambda/Domain/Presheaf/DayCoendSum.lean](#)



```

theorem evaluate_generator {M N L : Module} {n a b : Nat}
  (b : Bilinear M N L)
  (x : (M.obj a).Carrier) (y : (N.obj b).Carrier)
  (h : Superoperator n (a * b)) :
  evaluate L b (generator x y h) = L.act (b.app x y) h := by
exact (Raw.eval_unique (.generator x y h)
  (Raw.admissible_generator x y h) L b
  (Raw.Eval.generator x y h)).symm

```

#### 4.4.389 Universal bilinear insertion into the Day coend

**Definition.** Universal bilinear insertion into the Day coend.

**Construction.** Constructed by supplying each component: application, functorial action zero left, functorial action zero right, functorial action sum left, functorial action sum right and naturality. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/Presheaf/DayCoendSum.lean](#)

```

noncomputable def intro (M N : Module) :
  Bilinear M N (module M N) where
app := fun {m n} x y =>
  generator x y (Superoperator.identity (m * n))
map_zero_left := by
  intro m n y
  change generator (0 : (M.obj m).Carrier) y
  (Superoperator.identity (m * n)) = zero M N (m * n)
  apply quotient_ext
  intro L b
  rw [evaluate_generator, b.map_zero_left, L.act_zero_element]
  exact (evaluate_zero b).symm
map_zero_right := by
  intro m n x
  change generator x (0 : (N.obj n).Carrier)
  (Superoperator.identity (m * n)) = zero M N (m * n)
  apply quotient_ext
  intro L b
  rw [evaluate_generator, b.map_zero_right, L.act_zero_element]
  exact (evaluate_zero b).symm
map_sum_left := by
  intro ? _ m n x s y h L b
  simp only [evaluate_generator]
  simp only [L.act_id] using b.map_sum_left y h
map_sum_right := by
  intro ? _ m n x y s h L b
  simp only [evaluate_generator]
  simp only [L.act_id] using b.map_sum_right x h
naturality := by
  intro m' m n' n x y f g
  change
  generator (M.act x f) (N.act y g)
  (Superoperator.identity (m' * n')) =
  action (generator x y (Superoperator.identity (m * n)))
  (Superoperator.tensor f g)
  apply quotient_ext

```

```

intro L b
rw [evaluate_generator, evaluate_action, evaluate_generator,
    L.act_id, L.act_id]
exact b.naturality x y f g

```

#### 4.4.390 The evaluation on an introduced element

**Statement.** For superoperator modules  $M, N, L$ , natural numbers  $m, n$ : the evaluation of  $L, \beta$ ,  $(\text{intro } M \ N) \cdot \text{app } x \ y$  equals  $\beta \cdot \text{app } x \ y$ .

**Proof.** The key step rewrites with the definition of the introduction and the evaluation of the generator for Day coends.

#### Lean 4 source `QLambda/Domain/Presheaf/DayCoendSum.lean`

```

theorem evaluate_intro {M N L : Module} (b : Bilinear M N L)
  {m n : Nat} (x : (M.obj m).Carrier) (y : (N.obj n).Carrier) :
  evaluate L b ((intro M N).app x y) = b.app x y := by
  rw [intro, evaluate_generator, L.act_id]

```

#### 4.4.391 Evaluation of terms is the universal map induced by a bilinear map

**Definition.** Evaluation of terms is the universal map induced by a bilinear map.

**Construction.** Constructed by supplying each component: application, functorial action zero, functorial action sum and naturality. The accompanying laws are verified from the definitions.

#### Lean 4 source `QLambda/Domain/Presheaf/DayCoendSum.lean`

```

noncomputable def lift {M N L : Module} (b : Bilinear M N L) :
  Hom (module M N) L where
  app := fun _ x => evaluate L b x
  map_zero := fun _ => evaluate_zero b
  map_sum := fun h => h L b
  naturality := by
    intro m n x g
    exact evaluate_action b x g

```

#### 4.4.392 Evaluation of itself of the raw for Day coends

**Statement.** For superoperator modules  $M, N, L$ , a natural number  $n$ : if  $t$  is admissible and  $t$ .Hereditary, then the evaluation of  $L, \beta$ ,  $\text{Raw.value } t \ \text{ht} \ (\text{module } M \ N) \ (\text{intro } M \ N)$  equals  $\text{Raw.value } t \ \text{ht} \ L \ \beta$ .

**Proof.** By induction on  $t$ . For zero and a generator, the claim is checked directly; for a sum, the claim follows from the induction hypothesis. The key step rewrites with the evaluation of the action for Day coends, the evaluation of the generator for Day coends and the evaluation of zero for Day coends.

#### Lean 4 source `QLambda/Domain/Presheaf/DayCoendSum.lean`

```

private theorem evaluate_self_raw {M N L : Module} {n : Nat}
  (t : Raw M N n) (ht : t.Admissible) (hh : t.Hereditary)

```

```

(b : Bilinear M N L) :
evaluate L b
  (Raw.value t ht (module M N) (intro M N)) =
  Raw.value t ht L b := by
induction t with
| zero =>
  have hs := Raw.eval_unique (.zero : Raw M N n) ht
  (module M N) (intro M N) Raw.Eval.zero
  have htgt := Raw.eval_unique (.zero : Raw M N n) ht
  L b Raw.Eval.zero
  rw [ <- hs, <- htgt]
  exact evaluate_zero b
| generator x y h =>
  have hs := Raw.eval_unique (.generator x y h) ht
  (module M N) (intro M N) (Raw.Eval.generator x y h)
  have htgt := Raw.eval_unique (.generator x y h) ht
  L b (Raw.Eval.generator x y h)
  rw [ <- hs, <- htgt]
  change evaluate L b
  (action (generator x y (Superoperator.identity _)) h) =
  L.act (b.app x y) h
  rw [evaluate_action, evaluate_generator, L.act_id]
| sum f ih =>
  have hs := Raw.eval_value (.sum f) ht (module M N) (intro M N)
  obtain <q, hq, hqs> := Raw.eval_sum_cases (intro M N) f hs
  have hv := Raw.eval_value (.sum f) ht L b
  obtain <v, hv, hvs> := Raw.eval_sum_cases b f hv
  have hqv :
    (fun i => evaluate L b (q i)) = v := by
    funext i
    have hqi := Raw.eval_unique (f i) (hh i).2
    (module M N) (intro M N) (hq i)
    have hvi := Raw.eval_unique (f i) (hh i).2 L b (hv i)
    rw [hqi, ih i (hh i).2 (hh i).1, <- hvi]
  have hsum := hqs L b
  rw [hqv] at hsum
  exact (L.obj n).summation.unique hsum hvs

```

#### 4.4.393 Evaluation of itself for Day coends

**Statement.** For superoperator modules  $M, N$ , a natural number  $n$ : the evaluation of the module of  $M$  and  $N$ , the introduction of  $M$  and  $N$ ,  $x$  equals  $x$ .

**Proof.** The argument proceeds by induction. It follows from the extensionality for the quotient and the evaluation of itself of the raw for Day coends.

**Lean 4 source** [QLambda/Domain/Presheaf/DayCoendSum.lean](#)

```

theorem evaluate_self {M N : Module} {n : Nat}
  (x : Carrier M N n) :
  evaluate (module M N) (intro M N) x = x := by
induction x using Quotient.inductionOn with
| _ t =>
  apply quotient_ext
  intro L b

```

```
exact evaluate_self_raw t.1 t.2.1 t.2.2 b
```

#### 4.4.394 Evaluation of the postcomposition for raw Day coend expressions

**Statement.** For superoperator modules  $M, N, K, L$ , a module morphism  $\eta$ , a natural number  $n$ : if  $\text{Raw.Eval } \beta \text{ } t \text{ } z$ , then  $\text{Raw.Eval } (\text{Bilinear.postcomp } \eta \text{ } \beta) \text{ } t \text{ } (\eta.\text{app } n \text{ } z)$ .

**Proof.** By induction on the derivation that  $\text{Raw.Eval } \beta \text{ } t \text{ } z$ . For zero and a generator, the claim is checked directly; for a sum, the claim follows from the induction hypothesis. The key step rewrites with the definition of the postcomposition, the definition of the zero, the definition of the generator and the definition of the sum.

#### Lean 4 source `QLambda/Domain/Presheaf/DayCoendSum.lean`

```
private theorem Raw.eval_postcomp {M N K L : Module}
  (? : Hom K L) (b : Bilinear M N K) {n : Nat}
  {t : Raw M N n} {z : (K.obj n).Carrier}
  (h : Raw.Eval b t z) :
  Raw.Eval (Bilinear.postcomp ? b) t (?app n z) := by
  induction h with
  | zero =>
    rw [?.map_zero]
    exact Raw.Eval.zero
  | generator x y h =>
    rw [Bilinear.postcomp, ?.naturality]
    exact Raw.Eval.generator x y h
  | sum f v z hv hs ih =>
    exact Raw.Eval.sum f (fun i => ?.app n (v i)) _ ih (?.map_sum hs)
```

#### 4.4.395 Evaluation of the postcomposition of the raw for Day coends

**Statement.** For superoperator modules  $M, N, K, L$ , a module morphism  $\eta$ , a natural number  $n$ : if  $t$  is admissible, then  $\text{Raw.value } t \text{ } ht \text{ } L \text{ } (\text{Bilinear.postcomp } \eta \text{ } \beta) = \eta.\text{app } n \text{ } (\text{Raw.value } t \text{ } ht \text{ } K \text{ } \beta)$ .

**Proof.** It follows from the uniqueness of the evaluation.

#### Lean 4 source `QLambda/Domain/Presheaf/DayCoendSum.lean`

```
private theorem evaluate_postcomp_raw {M N K L : Module}
  (? : Hom K L) (b : Bilinear M N K) {n : Nat}
  (t : Raw M N n) (ht : t.Admissible) :
  Raw.value t ht L (Bilinear.postcomp ? b) =
  ?.app n (Raw.value t ht K b) := by
  exact (Raw.eval_unique t ht L (Bilinear.postcomp ? b)
    (Raw.eval_postcomp ? b (Raw.eval_value t ht K b))).symm
```

#### 4.4.396 Evaluation of the postcomposition for Day coends

**Statement.** For superoperator modules  $M, N, K, L$ , a module morphism  $\eta$ , a natural number  $n$ : the evaluation of  $L$ , the postcomposition of  $\eta$  and  $\beta$ ,  $x$  equals  $\eta.\text{app } n \text{ } (\text{evaluate } K \text{ } \beta \text{ } x)$ .

**Proof.** The argument proceeds by induction. It follows from the evaluation of the postcomposition of the raw for Day coends.

**Lean 4 source** [QLambda/Domain/Presheaf/DayCoendSum.lean](#)

```
theorem evaluate_postcomp {M N K L : Module}
  (? : Hom K L) (b : Bilinear M N K) {n : Nat}
  (x : Carrier M N n) :
  evaluate L (Bilinear.postcomp ? b) x =
    ?.app n (evaluate K b x) := by
  induction x using Quotient.inductionOn with
  | _ t => exact evaluate_postcomp_raw ? b t.1 t.2.1
```

#### 4.4.397 The semantic coend has the required Day universal property

**Definition.** The semantic coend has the required Day universal property.

**Construction.** Constructed by supplying each component: passage to fun, inverse fun, left inverse and right inverse. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/Presheaf/DayCoendSum.lean](#)

```
noncomputable def universalEquiv (M N L : Module) :
  Hom (module M N) L ? Bilinear M N L where
  toFun := fun ? => Bilinear.postcomp ? (intro M N)
  invFun := lift
  left_inv := by
    intro ?
    apply Hom.ext
    intro n x
    change evaluate L (Bilinear.postcomp ? (intro M N))
      (show Carrier M N n from x) =
      ?.app n (show Carrier M N n from x)
    rw [evaluate_postcomp, evaluate_self]
  right_inv := by
    intro b
    apply Bilinear.ext
    intro m n x y
    exact evaluate_intro b x y
```

#### 4.4.398 The general Day tensor presentation

**Definition.** The general Day tensor presentation.

**Construction.** Constructed by supplying each component: object, introduction, universal and universal application. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/Presheaf/DayCoendSum.lean](#)

```
noncomputable def presentation (M N : Module) :
  DayTensorPresentation M N where
  object := module M N
  intro := intro M N
  universal := fun L => universalEquiv M N L
```

```

universal_apply := by
  intro L ?
  rfl

```

#### 4.4.399 Genuine Day tensor for arbitrary specialized modules

**Definition.** Genuine Day tensor for arbitrary specialized modules.

**Construction.** Defined to be the module of  $M$  and  $N$ .

**Lean 4 source** [QLambda/Domain/Presheaf/DayCoendSum.lean](#)

```

noncomputable abbrev dayTensor (M N : Module) : Module :=
  DayCoend.module M N

```

#### 4.4.400 Concrete general Day tensor presentation

**Definition.** Concrete general Day tensor presentation.

**Construction.** Defined to be the presentation of  $M$  and  $N$ .

**Lean 4 source** [QLambda/Domain/Presheaf/DayCoendSum.lean](#)

```

noncomputable def dayTensorPresentation (M N : Module) :
  DayTensorPresentation M N :=
  DayCoend.presentation M N

```

#### 4.4.401 Yoneda unit at homogeneous degree $k$ , injected into the series

**Definition.** Yoneda unit at homogeneous degree  $k$ , injected into the series.

**Construction.** Defined by an explicit formula built from the representable to exponential, the dimension of a tensor power and the identity.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidAdmissible.lean](#)

```

noncomputable def bangDegreeUnit (A k : Nat) :
  ((bang A).obj (tensorPowerDimension A k)).Carrier :=
  (representableToBang A k).app (tensorPowerDimension A k)
  (Superoperator.identity (tensorPowerDimension A k))

```

#### 4.4.402 Unfolding of exponential split to representable Day on a representable element

**Statement.** Unfolding of `bangSplitToRepDay` on a representable element.

**Proof.** By definition: the left-hand side, `(bangSplitToRepDay A p q).app n  $\Phi$` , and the right-hand side, an explicit expression in the Day tensor product, the representable module, the dimension of a tensor power and the introduction, unfold to the same term.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidAdmissible.lean](#)

```

theorem bangSplitToRepDay_app (A p q n : Nat)
  (? : ((representable
    (tensorPowerDimension A p * tensorPowerDimension A q)).obj n).Carrier) :
  (bangSplitToRepDay A p q).app n ? =
  (dayTensor
    (representable (tensorPowerDimension A p))
    (representable (tensorPowerDimension A q))).act
  ((DayCoend.intro
    (representable (tensorPowerDimension A p))
    (representable (tensorPowerDimension A q))).app
    (Superoperator.identity (tensorPowerDimension A p)
      : ((representable (tensorPowerDimension A p)).obj
        (tensorPowerDimension A p)).Carrier)
    (Superoperator.identity (tensorPowerDimension A q)
      : ((representable (tensorPowerDimension A q)).obj
        (tensorPowerDimension A q)).Carrier))
  ? :=
  rfl

```

#### 4.4.403 Evaluation of a Day comultiplication component

**Statement.** Evaluation of a Day comultiplication component: the series Day map of the Yoneda coend unit, acted by the contraction split.

**Proof.** The key step rewrites with the functorial action for observational equalities, the definition of the lift, the evaluation on an introduced element and the definition of the exponential degree unit.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```

theorem bangComultComponent_evaluate (A p q n : Nat)
  (x : ((bang A).obj n).Carrier)
  (L : Module) (b : Bilinear (bang A) (bang A) L) :
  DayCoend.evaluate L b ((bangComultComponent A p q).app n x) =
  L.act
    (b.app (bangDegreeUnit A p) (bangDegreeUnit A q))
    ((bangSplitComponent A p q).app n x) := by
  let idp : ((representable (tensorPowerDimension A p)).obj
    (tensorPowerDimension A p)).Carrier :=
    Superoperator.identity (tensorPowerDimension A p)
  let idq : ((representable (tensorPowerDimension A q)).obj
    (tensorPowerDimension A q)).Carrier :=
    Superoperator.identity (tensorPowerDimension A q)
  let ? : Superoperator n
    (tensorPowerDimension A p * tensorPowerDimension A q) :=
    (bangSplitComponent A p q).app n x
  let gen :=
    (DayCoend.intro
      (representable (tensorPowerDimension A p))
      (representable (tensorPowerDimension A q))).app idp idq
  -- `bangComultComponent = map comp splitToRepDay comp split`.
  change
    (DayCoend.lift b).app n
      ((DayTensor.map
        (representableToBang A p) (representableToBang A q)).app n
        ((bangSplitToRepDay A p q).app n ?)) =

```

```

      L.act (b.app (bangDegreeUnit A p) (bangDegreeUnit A q)) ?
have hsplit :
  (bangSplitToRepDay A p q).app n ? =
    (dayTensor
      (representable (tensorPowerDimension A p))
      (representable (tensorPowerDimension A q))).act gen ? :=
    bangSplitToRepDay_app A p q n ?
rw [hsplit]
-- Push the Day bifunctor through the Yoneda action.
rw [(DayTensor.map (representableToBang A p)
  (representableToBang A q)).naturality gen ?]
-- Push `lift b` through the series Day action.
rw [(DayCoend.lift b).naturality _ ?]
-- Reduce the mapped generator.
have hintro :
  (DayTensor.map
    (representableToBang A p) (representableToBang A q)).app
    (tensorPowerDimension A p * tensorPowerDimension A q) gen =
    (DayCoend.intro (bang A) (bang A)).app
    (bangDegreeUnit A p) (bangDegreeUnit A q) := by
  unfold gen idp idq bangDegreeUnit representableToBang
  exact DayTensor.map_intro
    (representableToBang A p) (representableToBang A q)
    (Superoperator.identity (tensorPowerDimension A p))
    (Superoperator.identity (tensorPowerDimension A q))
rw [hintro]
-- `lift.app (intro x y) = b.app x y` after `act_id`.
change
  L.act
    (DayCoend.evaluate L b
      ((DayCoend.intro (bang A) (bang A)).app
        (bangDegreeUnit A p) (bangDegreeUnit A q)))
    ? =
    L.act (b.app (bangDegreeUnit A p) (bangDegreeUnit A q)) ?
rw [DayCoend.evaluate_intro]

```

#### 4.4.404 Off-degree injections are annihilated by a fixed split component

**Statement.** Off-degree injections are annihilated by a fixed split component. Formally:  $(\text{bangComultComponent } A \ p \ q).app \ n \ ((\text{bangInjection } A \ k).app \ n \ y) = 0$ .

**Proof.** The key step rewrites with the fact that observational equality is symmetric, the underlying value of the zero and the composition of zero for superoperators, in the right argument.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidAdmissible.lean](#)

```

theorem bangComultComponent_comp_injection_eq_zero (A p q k n : Nat)
  (hk : k != p + q)
  (y : ((symmetricPower A k).obj n).Carrier) :
  (bangComultComponent A p q).app n
    ((bangInjection A k).app n y) = 0 := by
have hsplit :
  (bangSplitComponent A p q).app n
    ((bangInjection A k).app n y) = 0 := by
change

```



```

    Superoperator.comp
      (Superoperator.ofEquivalence (tensorSplitEquiv A p q))
      (((countableProductInjection
        (fun j => symmetricPower A j) k).app n y)
        (p + q)).val) =
    0
have hz :
  ((countableProductInjection
    (fun j => symmetricPower A j) k).app n y) (p + q) =
  (0 : SymmetricElement A (p + q) n) := by
change (if h : p + q = k then h.symm |> y else 0) =
  (0 : SymmetricElement A (p + q) n)
simp [Ne.symm hk]
rw [hz, SymmetricElement.zero_val, Superoperator.comp_zero_right]
change
  (bangRepDayToSeriesDay A p q).app n
  ((bangSplitToRepDay A p q).app n
    ((bangSplitComponent A p q).app n
      ((bangInjection A k).app n y))) =
  0
rw [hsplit, (bangSplitToRepDay A p q).map_zero,
  (bangRepDayToSeriesDay A p q).map_zero]

```

#### 4.4.405 A comultiplication component depends only on the homogeneous coefficient of total degree $p + q$

**Statement.** A comultiplication component depends only on the homogeneous coefficient of total degree  $p + q$ .

**Proof.** Both sides are compared pointwise (by extensionality). The argument splits on the relevant condition. An equation between variables is used to substitute one for the other. The key step rewrites with the fact that observational equality is symmetric.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidAdmissible.lean](#)

```

theorem bangComultComponent_eq_of_injection (A p q n : Nat)
  (x : ((bang A).obj n).Carrier) :
  (bangComultComponent A p q).app n x =
  (bangComultComponent A p q).app n
    ((bangInjection A (p + q)).app n (x (p + q))) := by
have hx :=
  (bangComultComponent A p q).map_sum
    (countableProduct_hasSum_coordinates
      (fun j => symmetricPower A j) n x)
have hsupp :
  forall k, k != p + q ->
    (bangComultComponent A p q).app n
      ((bangInjection A k).app n (x k)) = 0 :=
  fun k hk => bangComultComponent_comp_injection_eq_zero A p q k n hk _
have hfam :
  (fun k =>
    (bangComultComponent A p q).app n
      ((bangInjection A k).app n (x k))) =
  fun k =>
    if k = p + q then

```

```

      (bangComultComponent A p q).app n
      ((bangInjection A (p + q)).app n (x (p + q)))
    else 0 := by
  funext k
  by_cases hk : k = p + q
  * subst hk; simp
  * rw [hsupp k hk, ite_eq_right hk]
have hx' :
  ((dayTensor (bang A) (bang A)).obj n).HasSum
  (fun k =>
    if k = p + q then
      (bangComultComponent A p q).app n
      ((bangInjection A (p + q)).app n (x (p + q)))
    else 0)
  ((bangComultComponent A p q).app n x) := by
  convert hx using 1
  exact hfam.symm
have hsingle :=
  Fiber.hasSum_singleCoordinate
  ((dayTensor (bang A) (bang A)).obj n) (p + q)
  ((bangComultComponent A p q).app n
    ((bangInjection A (p + q)).app n (x (p + q))))
exact ((dayTensor (bang A) (bang A)).obj n).summation.unique
hx' hsingle

```

#### 4.4.406 For $A = 1$ every tensor-power dimension is 1

**Statement.** For  $A = 1$  every tensor-power dimension is 1. Formally:  $\text{tensorPowerDimension } 1 \ k = 1$ .

**Proof.** The goal is simplified using the fact that the dimension of a tensor power equals a power and the usual algebraic identities.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidAdmissible.lean](#)

```

theorem tensorPowerDimension_one_eq (k : Nat) :
  tensorPowerDimension 1 k = 1 := by
  simp [tensorPowerDimension_eq_pow, one_pow]

```

#### 4.4.407 Cast of an $A = 1$ homogeneous coefficient to fiber dimension 1

**Definition.** Cast of an  $A = 1$  homogeneous coefficient to fiber dimension 1.

**Construction.** Defined to be  $(\text{tensorPowerDimension\_one\_eq } k) \triangleright x.\text{val}$ .

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidAdmissible.lean](#)

```

noncomputable def bangOneCoeff (n k : Nat)
  (x : SymmetricElement 1 k n) : Superoperator n 1 :=
  (tensorPowerDimension_one_eq k) |> x.val

```

#### 4.4.408 The $\mathbf{A} = 1$ series with identity in every homogeneous degree (fiber 1)

**Definition.** The  $\mathbf{A} = 1$  series with identity in every homogeneous degree (fiber 1).

**Construction.** The map sending  $k$  to an explicit expression in the symmetric power projection, the superoperator, the dimension of a tensor power and the transport along an equality.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidAdmissible.lean](#)

```
noncomputable def bangOneDegreeUnits :
  ((bang 1).obj 1).Carrier :=
  fun k =>
    (symmetricPowerProjection 1 k).app 1 <|
      show Superoperator 1 (tensorPowerDimension 1 k) from
        cast (congrArg (Superoperator 1) (tensorPowerDimension_one_eq k).symm)
          (Superoperator.identity 1)
```

#### 4.4.409 Degree- $k$ unit, injected into the common fiber 1

**Definition.** Degree- $k$  unit, injected into the common fiber 1.

**Construction.** Defined to be  $(\text{bangInjection } 1 \ k) . \text{app } 1 \ (\text{bangOneDegreeUnits } k)$ .

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidAdmissible.lean](#)

```
noncomputable def bangDegreeUnitOne (k : Nat) :
  ((bang 1).obj 1).Carrier :=
  (bangInjection 1 k).app 1 (bangOneDegreeUnits k)
```

#### 4.4.410 Summability of the exponential degree unit one

**Statement.** The family  $\text{bangDegreeUnitOne}$  sums to  $\text{bangOneDegreeUnits}$ .

**Proof.** This is an instance of the fact that every element of a countable product is the partial sum of its coordinate injections, applied to the definition of the exponential one degree units.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidAdmissible.lean](#)

```
theorem bangDegreeUnitOne_hasSum :
  ((bang 1).obj 1).HasSum bangDegreeUnitOne bangOneDegreeUnits :=
  countableProduct_hasSum_coordinates
    (fun j => symmetricPower 1 j) 1 bangOneDegreeUnits
```

#### 4.4.411 Rectangle summability of $\beta$ on the $\mathbf{A} = 1$ degree-unit series

**Statement.** Rectangle summability of  $\beta$  on the  $\mathbf{A} = 1$  degree-unit series.

**Proof.** The claim follows directly from the definitions of the objects involved.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidAdmissible.lean](#)

```
theorem bangOne_degreeUnit_rectangle_hasSum
  (L : Module.{0}) (b : Bilinear (bang 1) (bang 1) L) :
  (L.obj (1 * 1)).HasSum
    (fun pq : Nat x Nat =>
```

```

      b.app (bangDegreeUnitOne pq.1) (bangDegreeUnitOne pq.2))
    (b.app bangOneDegreeUnits bangOneDegreeUnits) := by
have hU := bangDegreeUnitOne_hasSum
have hrows (p : Nat) :
  (L.obj (1 * 1)).HasSum
  (fun q : Nat => b.app (bangDegreeUnitOne p) (bangDegreeUnitOne q))
  (b.app (bangDegreeUnitOne p) bangOneDegreeUnits) :=
  b.map_sum_right (bangDegreeUnitOne p) hU
have hcol :
  (L.obj (1 * 1)).HasSum
  (fun p : Nat => b.app (bangDegreeUnitOne p) bangOneDegreeUnits)
  (b.app bangOneDegreeUnits bangOneDegreeUnits) :=
  b.map_sum_left bangOneDegreeUnits hU
have hflat :=
  ((L.obj (1 * 1)).summation.flatten
  (fun p q => b.app (bangDegreeUnitOne p) (bangDegreeUnitOne q))
  (b.app bangOneDegreeUnits bangOneDegreeUnits)).mpr
  <fun p => b.app (bangDegreeUnitOne p) bangOneDegreeUnits,
  hrows, hcol>
exact
  ((L.obj (1 * 1)).summation.reindex (Equiv.sigmaEquivProd Nat Nat)
  (fun pq : Nat x Nat =>
    b.app (bangDegreeUnitOne pq.1) (bangDegreeUnitOne pq.2))
  (b.app bangOneDegreeUnits bangOneDegreeUnits)).mp hflat

```

#### 4.4.412 Outer series gate for assembling $A = 1$ admissibility from homogeneous diagonal rows

**Definition.** Outer series gate for assembling  $A = 1$  admissibility from homogeneous diagonal rows: joint  $L.act \ d_k \ \Phi_k$  with summable  $(d_k)$ .

**Construction.** Defined by an explicit formula built from the exponential modality, the superoperator module and the exponential one coefficient.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidAdmissible.lean](#)

```

def BangComultSeriesActHasSum : Prop :=
  forall (n : Nat) (x : ((bang 1).obj n).Carrier)
    (L : Module.{0}) (d : Nat -> (L.obj 1).Carrier) (D : (L.obj 1).Carrier),
    (L.obj 1).HasSum d D ->
    exists z : (L.obj n).Carrier,
      (L.obj n).HasSum (fun k => L.act (d k) (bangOneCoeff n k (x k))) z

```

#### 4.4.413 The outer series gate is act sum from one (fiber $1 = 1 * 1$ )

**Statement.** The outer series gate is  $Module.act\_sum\_from\_one$  (fiber  $1 = 1 * 1$ ). Formally:  $BangComultSeriesActHasSum$ .

**Proof.** It follows from the usual algebraic identities.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidAdmissible.lean](#)

```

theorem bangComultSeriesActHasSum_holds : BangComultSeriesActHasSum := by
  intro n x L d D hD
  exact L.act_sum_from_one (fun k => bangOneCoeff n k (x k)) hD

```

#### 4.4.414 Identity cast along a dimension equality as a basis equivalence

**Statement.** Identity cast along a dimension equality as a basis equivalence. Formally: `cast (congr Arg (Superoperator a) h) (Superoperator.identity a) = Superoperator.ofEquivalence (finCongr h)`.

**Proof.** By case analysis on the derivation that  $a = b$ . It follows from the reflexivity of the map induced by an index equivalence.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```
theorem cast_identity_eq_ofEquivalence {a b : Nat} (h : a = b) :
  cast (congrArg (Superoperator a) h) (Superoperator.identity a) =
    Superoperator.ofEquivalence (finCongr h) := by
  cases h
  exact (Superoperator.ofEquivalence_refl a).symm
```

#### 4.4.415 $A = 1$ Yoneda degree unit is the fiber-1 unit acted by the dimension cast

**Statement.**  $A = 1$  Yoneda degree unit is the fiber-1 unit acted by the dimension cast.

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the identity cast along a dimension equality as a basis equivalence, the map induced by an index equivalence of a composite for superoperators, the reflexivity of the map induced by an index equivalence and the transitivity for semantic equalities of circuits.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```
theorem bangDegreeUnit_eq_act (k : Nat) :
  bangDegreeUnit 1 k =
    (bang 1).act (bangDegreeUnitOne k)
      (Superoperator.ofEquivalence
        (finCongr (tensorPowerDimension_one_eq k))) := by
  let h := tensorPowerDimension_one_eq k
  change
    (bangInjection 1 k).app (tensorPowerDimension 1 k)
      ((symmetricPowerProjection 1 k).app (tensorPowerDimension 1 k)
        (Superoperator.identity (tensorPowerDimension 1 k))) =
    (bang 1).act
      ((bangInjection 1 k).app 1 (bangOneDegreeUnits k))
      (Superoperator.ofEquivalence (finCongr h))
  have hn :=
    (bangInjection 1 k).naturality (bangOneDegreeUnits k)
    (Superoperator.ofEquivalence (finCongr h))
  refine Eq.trans ?_ hn
  congr 1
  change
    (symmetricPowerProjection 1 k).app (tensorPowerDimension 1 k)
      (Superoperator.identity (tensorPowerDimension 1 k)) =
    (symmetricPower 1 k).act
      ((symmetricPowerProjection 1 k).app 1
        (cast (congrArg (Superoperator 1) h.symm)
          (Superoperator.identity 1)))
      (Superoperator.ofEquivalence (finCongr h))
  have hp :=
```

```

    (symmetricPowerProjection 1 k).naturality
      (cast (congrArg (Superoperator 1) h.symm)
        (Superoperator.identity 1))
      (Superoperator.ofEquivalence (finCongr h))
  refine Eq.trans ?_ hp
  congr 1
  show Superoperator.identity (tensorPowerDimension 1 k) =
    Superoperator.comp
      (cast (congrArg (Superoperator 1) h.symm) (Superoperator.identity 1))
      (Superoperator.ofEquivalence (finCongr h))
  rw [cast_identity_eq_ofEquivalence h.symm, Superoperator.ofEquivalence_comp]
  have : (finCongr h).trans (finCongr h.symm) = Equiv.refl _ := by
    apply Equiv.ext
    intro i
    apply Fin.ext
    simp
  rw [this, Superoperator.ofEquivalence_refl]

```

#### 4.4.416 Split channel for $A = 1$ , after tensoring dimension casts, equals exponential one coefficient

**Statement.** Split channel for  $A = 1$ , after tensoring dimension casts, equals `bangOneCoeff`.

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the definition of the exponential split component, the definition of the exponential one coefficient, the fact that composition for superoperators is associative and the tensor product of a map induced by an index equivalence.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```

theorem bangSplit_tensor_cast_eq_oneCoeff (p q n : Nat)
  (x : ((bang 1).obj n).Carrier) :
  Superoperator.comp
    (Superoperator.tensor
      (Superoperator.ofEquivalence (finCongr (tensorPowerDimension_one_eq p)))
      (Superoperator.ofEquivalence (finCongr (tensorPowerDimension_one_eq q))))
    ((bangSplitComponent 1 p q).app n x) =
  bangOneCoeff n (p + q) (x (p + q)) := by
  simp only [bangSplitComponent, bangOneCoeff]
  rw [Superoperator.comp_assoc]
  let hp := tensorPowerDimension_one_eq p
  let hq := tensorPowerDimension_one_eq q
  let hk := tensorPowerDimension_one_eq (p + q)
  have htarget :
    Superoperator.comp
      (Superoperator.tensor
        (Superoperator.ofEquivalence (finCongr hp))
        (Superoperator.ofEquivalence (finCongr hq)))
      (Superoperator.ofEquivalence (tensorSplitEquiv 1 p q)) =
    Superoperator.ofEquivalence (finCongr hk) := by
  rw [Superoperator.tensor_ofEquivalence, Superoperator.ofEquivalence_comp]
  congr 1
  apply Equiv.ext
  intro i
  apply Fin.ext
  have hL :
    (((tensorSplitEquiv 1 p q).trans

```

```

      (Superoperator.tensorEquiv (finCongr hp) (finCongr hq))) i :
        Fin (1 * 1)) : Nat) = 0 :=
    fin_val_eq_zero_of_card_one (by rfl) _
  have hR : (((finCongr hk) i : Fin 1) : Nat) = 0 :=
    fin_val_eq_zero_of_card_one rfl _
  exact hL.trans hR.symm
have h? :=
  congrArg (fun ? => Superoperator.comp ? (x (p + q)).val) htarget
exact h?.trans (Superoperator.comp_ofEquivalence_finCongr hk (x (p + q)).val)

```

#### 4.4.417 Equivalence between pairs and ordered partitions of their total degree

**Definition.** Equivalence between pairs and ordered partitions of their total degree.

**Construction.** Constructed by supplying each component: passage to fun, inverse fun, left inverse and right inverse. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidAdmissible.lean](#)

```

def degreePartitionEquiv : Nat x Nat ? (Sigma t : Nat, DegreePartition t) where
  toFun := pairToDegreePartition
  invFun := fun p => degreePartitionToPair p.1 p.2
  left_inv := pairToDegreePartition_toPair
  right_inv := by
    rintro <t, part>
    dsimp [pairToDegreePartition, degreePartitionToPair]
    have hs : part.val + (t - part.val) = t :=
      Nat.add_sub_of_le (Nat.le_of_lt_succ part.isLt)
    refine Sigma.ext hs ?_
    let lhs : Fin (part.val + (t - part.val) + 1) :=
      <part.val, Nat.lt_succ_of_le (Nat.le_add_right _ _)>
    let hs' : part.val + (t - part.val) + 1 = t + 1 :=
      congrArg (* + 1) hs
    have hEq : Fin.cast hs' lhs = part := by
      apply Fin.ext
      exact Fin.val_cast hs' lhs
    refine HEq.trans (b := Fin.cast hs' lhs) ?_ (heq_of_eq hEq)
    have hfun : (Fin.cast hs' : Fin _ -> Fin _) =
      cast (congrArg Fin hs') :=
        Fin.cast_eq_cast hs'
    show lhs ? Fin.cast hs' lhs
    rw [show Fin.cast hs' lhs = cast (congrArg Fin hs') lhs from
      congrFun hfun lhs]
    exact (cast_heq (congrArg Fin hs') lhs).symm

```

#### 4.4.418 Homogeneous $A = 1$ family vanishes off the diagonal $p + q = k$

**Statement.** Homogeneous  $A = 1$  family vanishes off the diagonal  $p + q = k$ . Formally:  $\text{DayCoend. evaluate } L \beta ((\text{bangComultComponent } 1 \ p \ q). \text{app } n ((\text{bangInjection } 1 \ k). \text{app } n \ y)) = 0$ .

**Proof.** The key step rewrites with the fact that off-degree injections are annihilated by a fixed split component and the evaluation of zero for Day coends.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```
theorem bangComultComponent_evaluate_injection_eq_zero
  (p q k n : Nat) (hk : k != p + q)
  (y : ((symmetricPower 1 k).obj n).Carrier)
  (L : Module) (b : Bilinear (bang 1) (bang 1) L) :
  DayCoend.evaluate L b
    ((bangComultComponent 1 p q).app n
     ((bangInjection 1 k).app n y)) =
  0 := by
  rw [bangComultComponent_comp_injection_eq_zero 1 p q k n hk y]
  exact DayCoend.evaluate_zero b
```

#### 4.4.419 Evaluation at $A = 1$ : Day component equals rectangle coefficient acted by the total-degree series channel

**Statement.** Evaluation at  $A = 1$ : Day component equals rectangle coefficient acted by the total-degree series channel.

**Proof.** The key step rewrites with the fact that  $A = 1$  Yoneda degree unit is the fiber-1 unit acted by the dimension cast and the fact that split channel for  $A = 1$ , after tensoring dimension casts, equals exponential one coefficient.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```
theorem bangComultComponent_evaluate_one (p q n : Nat)
  (x : ((bang 1).obj n).Carrier)
  (L : Module) (b : Bilinear (bang 1) (bang 1) L) :
  DayCoend.evaluate L b ((bangComultComponent 1 p q).app n x) =
  L.act (b.app (bangDegreeUnitOne p) (bangDegreeUnitOne q))
    (bangOneCoeff n (p + q) (x (p + q))) := by
  have he := bangComultComponent_evaluate 1 p q n x L b
  rw [he, bangDegreeUnit_eq_act p, bangDegreeUnit_eq_act q, b.naturality]
  have hact := L.act_comp
    (b.app (bangDegreeUnitOne p) (bangDegreeUnitOne q))
    (Superoperator.tensor
      (Superoperator.ofEquivalence (finCongr (tensorPowerDimension_one_eq p)))
      (Superoperator.ofEquivalence (finCongr (tensorPowerDimension_one_eq q))))
    ((bangSplitComponent 1 p q).app n x)
  rw [hact, bangSplit_tensor_cast_oneCoeff]
```

#### 4.4.420 Mixed-partition admissibility for $A = 1$

**Statement.** Mixed-partition admissibility for  $A = 1$ . Formally: `BangComultComponentsAdmissible 1`.

**Proof.** Both sides are compared pointwise (by extensionality). Each component of the claim is established separately. The hypotheses are unpacked into their constituent data. The key step rewrites with the definition of the exponential comultiplication component family and the degree partition to pair of the second projection of a sum.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`



```

theorem bangComultComponentsAdmissible_one :
  BangComultComponentsAdmissible 1 := by
  intro n x L b
  have hrect := bangOne_degreeUnit_rectangle_hasSum L b
  have hre :
    (L.obj (1 * 1)).HasSum
    (fun p : Sigma t : Nat, DegreePartition t =>
      b.app (bangDegreeUnitOne (degreePartitionToPair p.1 p.2).1)
        (bangDegreeUnitOne (degreePartitionToPair p.1 p.2).2))
    (b.app bangOneDegreeUnits bangOneDegreeUnits) :=
    ((L.obj (1 * 1)).summation.reindex degreePartitionEquiv.symm
      (fun pq =>
        b.app (bangDegreeUnitOne pq.1) (bangDegreeUnitOne pq.2))
        (b.app bangOneDegreeUnits bangOneDegreeUnits)).mpr hrect
  obtain <row, hrows, hrowSum> :=
    ((L.obj (1 * 1)).summation.flatten
      (fun t (part : DegreePartition t) =>
        b.app (bangDegreeUnitOne (degreePartitionToPair t part).1)
          (bangDegreeUnitOne (degreePartitionToPair t part).2))
        (b.app bangOneDegreeUnits bangOneDegreeUnits)).mp hre
  obtain <Z, hZ> :=
    bangComultSeriesActHasSum_holds n x L
    (fun k => row k) (b.app bangOneDegreeUnits bangOneDegreeUnits) hrowSum
  refine <Z, ?_>
  have hfam :
    (fun pq : Nat x Nat =>
      DayCoend.evaluate L b (bangComultComponentFamily 1 n x pq)) =
    fun pq : Nat x Nat =>
      L.act (b.app (bangDegreeUnitOne pq.1) (bangDegreeUnitOne pq.2))
        (bangOneCoeff n (pq.1 + pq.2) (x (pq.1 + pq.2))) := by
    funext pq
    simp [bangComultComponentFamily] using
      bangComultComponent_evaluate_one pq.1 pq.2 n x L b
  rw [hfam]
  have hflat :
    (L.obj n).HasSum
    (fun p : Sigma t : Nat, DegreePartition t =>
      L.act
        (b.app (bangDegreeUnitOne (degreePartitionToPair p.1 p.2).1)
          (bangDegreeUnitOne (degreePartitionToPair p.1 p.2).2))
        (bangOneCoeff n p.1 (x p.1)))
    Z :=
    ((L.obj n).summation.flatten
      (fun t (part : DegreePartition t) =>
        L.act
          (b.app (bangDegreeUnitOne (degreePartitionToPair t part).1)
            (bangDegreeUnitOne (degreePartitionToPair t part).2))
            (bangOneCoeff n t (x t)))
        Z).mpr
    <fun t => L.act (row t) (bangOneCoeff n t (x t)),
      fun t => L.act_sum_element (bangOneCoeff n t (x t)) (hrows t),
      hZ>
  have hflat' :
    (L.obj n).HasSum
    (fun p : Sigma t : Nat, DegreePartition t =>
      L.act

```

```

      (b.app (bangDegreeUnitOne (degreePartitionToPair p.1 p.2).1)
        (bangDegreeUnitOne (degreePartitionToPair p.1 p.2).2))
    (bangOneCoeff n
      ((degreePartitionToPair p.1 p.2).1 +
        (degreePartitionToPair p.1 p.2).2)
      (x
        ((degreePartitionToPair p.1 p.2).1 +
          (degreePartitionToPair p.1 p.2).2))))
  Z := by
    convert hflat using 1
    funext p
    rw [degreePartitionToPair_snd_add]
  exact
    ((L.obj n).summation.reindex degreePartitionEquiv.symm
      (fun pq =>
        L.act (b.app (bangDegreeUnitOne pq.1) (bangDegreeUnitOne pq.2))
          (bangOneCoeff n (pq.1 + pq.2) (x (pq.1 + pq.2)))))
    Z).mp hflat'

```

#### 4.4.421 Unconditional Day comultiplication for the one-dimensional exponential

**Definition.** Unconditional Day comultiplication for the one-dimensional exponential.

**Construction.** Defined to be the comultiplication of the exponential of the exponential comultiplication components admissibility one at 1.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidAdmissible.lean](#)

```

noncomputable def bangComult_one :
  Hom (bang 1) (dayTensor (bang 1) (bang 1)) :=
  bangComult 1 bangComultComponentsAdmissible_one

/-! ## Special case `A = 0`: only degree 0 survives -/

```

#### 4.4.422 There is a unique superoperator into the zero-dimensional system

**Statement.** There is a unique superoperator into the zero-dimensional system. Formally:  $\Phi = 0$ .

**Proof.** Both sides are compared pointwise (by extensionality). It follows from the extensionality for superoperators and the extensionality for completely positive maps.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidAdmissible.lean](#)

```

theorem superoperator_outDim_zero {n : Nat} (? : Superoperator n 0) :
  ? = 0 := by
  apply Superoperator.ext
  apply CPMMap.ext
  ext a b
  exact isEmptyElim a.1

```

#### 4.4.423 For $A = 0$ , every positive symmetric degree is the zero channel

**Statement.** For  $A = 0$ , every positive symmetric degree is the zero channel. Formally:  $(x \ k) \cdot \text{val} = 0$ .

**Proof.** By case analysis on the natural number  $k$ . For zero and a successor, the claim is checked directly. The key step rewrites with the definition of the dimension of a tensor power, the extensionality for superoperators and the extensionality for completely positive maps.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```
theorem bang_zero_high_degree (n k : Nat) (hk : 0 < k)
  (x : ((bang 0).obj n).Carrier) :
  (x k).val = 0 := by
  cases k with
  | zero => exact (lt_irrefl _ hk).elim
  | succ k =>
    have hdim : tensorPowerDimension 0 (k + 1) = 0 := by
      simp [tensorPowerDimension]
    apply Superoperator.ext
    apply CPMMap.ext
    ext a b
    have : IsEmpty (Fin (tensorPowerDimension 0 (k + 1))) := by
      rw [hdim]; infer_instance
    exact isEmptyElim a.1
```

#### 4.4.424 Homogeneous Day components vanish off the $(0, 0)$ slot when $A = 0$

**Statement.** Homogeneous Day components vanish off the  $(0, 0)$  slot when  $A = 0$ . Formally:  $\text{bangComultComponentFamily } 0 \ n \ x \ pq = 0$ .

**Proof.** By case analysis on  $pq$ . For zero and a successor, the claim is checked directly. The key step rewrites with the fact that for  $A = 0$ , every positive symmetric degree is the zero channel, the definition of the exponential comultiplication component, the components of the composition and the hypothesis that  $pq \neq (0, 0)$ .

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```
theorem bangComultComponentFamily_zero_of_pos_degree
  (n : Nat) (x : ((bang 0).obj n).Carrier) (pq : Nat x Nat)
  (hpq : pq != (0, 0)) :
  bangComultComponentFamily 0 n x pq = 0 := by
  have hpos : 0 < pq.1 + pq.2 := by
    rcases pq with <p, q>
    change (p, q) != (0, 0) at hpq
  cases p with
  | zero =>
    cases q with
    | zero => exact (hpq rfl).elim
    | succ q => exact Nat.succ_pos _
  | succ p => exact Nat.add_pos_left (Nat.succ_pos _) _
  have hsplit :
    (bangSplitComponent 0 pq.1 pq.2).app n x = 0 := by
    change
    Superoperator.comp
```

```

      (Superoperator.ofEquivalence
        (tensorSplitEquiv 0 pq.1 pq.2))
      (x (pq.1 + pq.2)).val =
    0
  rw [bang_zero_high_degree n (pq.1 + pq.2) hpos x]
  exact Superoperator.comp_zero_right _
change
  (bangComultComponent 0 pq.1 pq.2).app n x = 0
simp only [bangComultComponent, Hom.comp_app]
rw [hsplit, (bangSplitToRepDay 0 pq.1 pq.2).map_zero,
  (bangRepDayToSeriesDay 0 pq.1 pq.2).map_zero]

```

#### 4.4.425 Mixed-partition admissibility holds for $A = 0$

**Statement.** Mixed-partition admissibility holds for  $A = 0$ : only the  $(0, 0)$  component can be nonzero, so the Day family is a singleton sum. Formally: `BangComultComponentsAdmissible 0`.

**Proof.** Both sides are compared pointwise (by extensionality). The argument splits on the relevant condition. An equation between variables is used to substitute one for the other. The key step rewrites with the homogeneous Day components vanish off the  $(0, 0)$  slot when  $A = 0$ , the evaluation of zero for Day coends and the fact that a one-supported family over any countable decidable index has its nonzero value as sum.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```

theorem bangComultComponentsAdmissible_zero :
  BangComultComponentsAdmissible 0 := by
  intro n x L b
  refine
    <DayCoend.evaluate L b (bangComultComponentFamily 0 n x (0, 0)), ?_>
  have hfam :
    (fun pq : Nat x Nat =>
      DayCoend.evaluate L b (bangComultComponentFamily 0 n x pq)) =
    fun pq : Nat x Nat =>
      if pq = (0, 0) then
        DayCoend.evaluate L b (bangComultComponentFamily 0 n x (0, 0))
      else 0 := by
    funext pq
    by_cases hpq : pq = (0, 0)
    * subst hpq; simp
    * rw [bangComultComponentFamily_zero_of_pos_degree n x pq hpq,
      ite_eq_right hpq]
      exact DayCoend.evaluate_zero b
  rw [hfam]
  exact Fiber.hasSum_singleAt (L.obj n) (0, 0)
    (DayCoend.evaluate L b (bangComultComponentFamily 0 n x (0, 0)))

```

#### 4.4.426 Unconditional Day comultiplication for the zero-dimensional exponential

**Definition.** Unconditional Day comultiplication for the zero-dimensional exponential.

**Construction.** Defined to be the comultiplication of the exponential of the exponential comultiplication components admissibility zero at 0.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```
noncomputable def bangComult_zero :
  Hom (bang 0) (dayTensor (bang 0) (bang 0)) :=
  bangComult 0 bangComultComponentsAdmissible_zero
```

#### 4.4.427 For $A = 0$ the Day comultiplication is exactly the $(0, 0)$ homogeneous component (singleton coend sum)

**Statement.** For  $A = 0$  the Day comultiplication is exactly the  $(0, 0)$  homogeneous component (singleton coend sum). Formally: `bangComult_zero.app n x = (bangComultComponent 0 0 0).app n x`.

**Proof.** Both sides are compared pointwise (by extensionality). The argument splits on the relevant condition. An equation between variables is used to substitute one for the other. The key step rewrites with the homogeneous Day components vanish off the  $(0, 0)$  slot when  $A = 0$ , the evaluation of zero for Day coends and the fact that a one-supported family over any countable decidable index has its nonzero value as sum.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```
theorem bangComult_zero_eq_component (n : Nat)
  (x : ((bang 0).obj n).Carrier) :
  bangComult_zero.app n x =
    (bangComultComponent 0 0 0).app n x := by
  have hsum :
    DayCoend.HasSum (bangComultComponentFamily 0 n x)
      ((bangComultComponent 0 0 0).app n x) := by
    intro L b
    have hfam :
      (fun pq : Nat x Nat =>
        DayCoend.evaluate L b (bangComultComponentFamily 0 n x pq)) =
        fun pq : Nat x Nat =>
          if pq = (0, 0) then
            DayCoend.evaluate L b
              ((bangComultComponent 0 0 0).app n x)
          else 0 := by
      funext pq
      by_cases hpq : pq = (0, 0)
      * subst hpq; rfl
      * rw [bangComultComponentFamily_zero_of_pos_degree n x pq hpq,
        ite_eq_right hpq]
        exact DayCoend.evaluate_zero b
    rw [hfam]
    exact Fiber.hasSum_singleAt (L.obj n) (0, 0) _
  exact ((dayTensor (bang 0) (bang 0)).obj n).summation.unique
    (bangComultApp_hasSum 0 bangComultComponentsAdmissible_zero n x) hsum
```

#### 4.4.428 Admissibility for the two fibers where the acted outer series lands in fiber 1 (so act sum from one applies)

**Statement.** Admissibility for the two fibers where the acted outer series lands in fiber 1 (so `Module.act_sum_from_one` applies). Formally: `BangComultComponentsAdmissible A`.

**Proof.** It follows from the fact that mixed-partition admissibility holds for  $A = 0$  and the mixed-partition admissibility for  $A = 1$ .

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```
theorem bangComultComponentsAdmissible_of_le_one (A : Nat) (hA : A <= 1) :
  BangComultComponentsAdmissible A := by
  interval_cases A
  * exact bangComultComponentsAdmissible_zero
  * exact bangComultComponentsAdmissible_one
```

#### 4.4.429 Unconditional Day comultiplication when $A \leq 1$

**Definition.** Unconditional Day comultiplication when  $A \leq 1$ .

**Construction.** Defined to be the comultiplication of the exponential of  $A$  and the exponential comultiplication components admissibility of order one of  $A$  and  $hA$ .

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```
noncomputable def bangComult_of_le_one (A : Nat) (hA : A <= 1) :
  Hom (bang A) (dayTensor (bang A) (bang A)) :=
  bangComult A (bangComultComponentsAdmissible_of_le_one A hA)

/-! ## Day factorization of contraction for `A <= 1` -/
```

#### 4.4.430 For $A = 1$ , every tensor-factor permutation is the identity equivalence

**Statement.** For  $A = 1$ , every tensor-factor permutation is the identity equivalence. Formally: `factorPermutationEquiv 1 k  $\sigma$  = Equiv.refl _`.

**Proof.** Both sides are compared pointwise (by extensionality). It follows from the extensionality for bilinear maps and the fact that every index of a one-element `Fin` is zero.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```
theorem factorPermutationEquiv_one (k : Nat) (sigma : Equiv.Perm (Fin k)) :
  factorPermutationEquiv 1 k sigma = Equiv.refl _ := by
  apply Equiv.ext
  intro i
  apply Fin.ext
  have hd := tensorPowerDimension_one_eq k
  exact (fin_val_eq_zero_of_card_one hd _).trans
    (fin_val_eq_zero_of_card_one hd _).symm
```

#### 4.4.431 For $A = 1$ , every tensor-factor permutation channel is the identity

**Statement.** For  $A = 1$ , every tensor-factor permutation channel is the identity. Formally:  $\text{factorPermutation } 1 \ k \ \sigma = \text{Superoperator.identity } (\text{tensorPowerDimension } 1 \ k)$ .

**Proof.** The key step rewrites with the fact that for  $A = 1$ , every tensor-factor permutation is the identity equivalence and the reflexivity of the map induced by an index equivalence.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```
theorem factorPermutation_one (k : Nat) (sigma : Equiv.Perm (Fin k)) :
  factorPermutation 1 k sigma =
    Superoperator.identity (tensorPowerDimension 1 k) := by
  change Superoperator.ofEquivalence (factorPermutationEquiv 1 k sigma) = _
  rw [factorPermutationEquiv_one, Superoperator.ofEquivalence_refl]
```

#### 4.4.432 Symmetric averaging is trivial on one-dimensional tensor powers

**Statement.** Symmetric averaging is trivial on one-dimensional tensor powers. Formally:  $\text{symmetricAverage } 1 \ k = \text{Superoperator.identity } (\text{tensorPowerDimension } 1 \ k)$ .

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the symmetric average of the action on a matrix, the fact that for  $A = 1$ , every tensor-factor permutation channel is the identity, standard identities for finite sums and standard identities for finite types.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```
theorem symmetricAverage_one (k : Nat) :
  symmetricAverage 1 k =
    Superoperator.identity (tensorPowerDimension 1 k) := by
  apply Superoperator.ext
  apply CPMat.ext_apply
  intro ?
  rw [symmetricAverage_applyMat]
  simp_rw [factorPermutation_one]
  have hid :
    (Superoperator.identity (tensorPowerDimension 1 k)).cp.applyMat ? = ? := by
    change (CPMap.identity _).applyMat ? = ?
    exact CPMat.applyMat_identity ?
  simp_rw [hid]
  rw [Finset.sum_const]
  have hcard :
    (Finset.univ : Finset (Equiv.Perm (Fin k))).card = Nat.factorial k := by
    simp [Fintype.card_perm]
  rw [hcard, <- Nat.cast_smul_eq_nsmul ?, smul_smul]
  have hk : ((Nat.factorial k : ?)^-1 : ?) * (Nat.factorial k : ?) = 1 := by
    rw [ <- Complex.ofReal_natCast (Nat.factorial k), <- Complex.ofReal_inv,
      <- Complex.ofReal_mul,
      inv_mul_cancel_0 (Nat.cast_ne_zero.mpr (Nat.factorial_ne_zero k)),
      Complex.ofReal_one ]
  rw [hk, one_smul]
```

#### 4.4.433 Symmetric averaging is trivial on the unique degree-zero-dimensional fiber

**Statement.** Symmetric averaging is trivial on the unique degree-zero zero-dimensional fiber. Formally:  $\text{symmetricAverage } 0 \ 0 = \text{Superoperator.identity } (\text{tensorPowerDimension } 0 \ 0)$ .

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the definition of the dimension of a tensor power, the symmetric average of the action on a matrix, the reflexivity of the map induced by an index equivalence and standard identities for finite sums. The remaining numerical facts are checked by direct computation.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```
theorem symmetricAverage_zero_zero :
  symmetricAverage 0 0 = Superoperator.identity (tensorPowerDimension 0 0) := by
  have hdim : tensorPowerDimension 0 0 = 1 := by simp [tensorPowerDimension]
  apply Superoperator.ext
  apply CPMat.ext_apply
  intro ?
  rw [symmetricAverage_applyMat]
  have hperm (sigma : Equiv.Perm (Fin 0)) :
    factorPermutation 0 0 sigma =
      Superoperator.identity (tensorPowerDimension 0 0) := by
  change Superoperator.ofEquivalence (factorPermutationEquiv 0 0 sigma) = _
  have : factorPermutationEquiv 0 0 sigma = Equiv.refl _ := by
    apply Equiv.ext
    intro i
    apply Fin.ext
    exact (fin_val_eq_zero_of_card_one hdim _).trans
      (fin_val_eq_zero_of_card_one hdim _).symm
  rw [this, Superoperator.ofEquivalence_refl]
  simp_rw [hperm]
  have hid :
    (Superoperator.identity (tensorPowerDimension 0 0)).cp.applyMat ? = ? := by
  change (CPMap.identity _).applyMat ? = ?
  exact CPMat.applyMat_identity ?
  simp_rw [hid]
  rw [Finset.sum_const]
  have hcard : (Finset.univ : Finset (Equiv.Perm (Fin 0))).card = 1 := by decide
  rw [hcard, <- Nat.cast_smul_eq_nsmul ?, smul_smul]
  norm_num
```

#### 4.4.434 For $A \leq 1$ , symmetric averaging coincides with the identity channel

**Statement.** For  $A \leq 1$ , symmetric averaging coincides with the identity channel. Formally:  $\text{symmetricAverage } A \ k = \text{Superoperator.identity } (\text{tensorPowerDimension } A \ k)$ .

**Proof.** By case analysis on the natural number  $k$ . For zero, the claim is one of the premises of the rule; for a successor, the claim is checked directly. The goal is simplified using the definition of the dimension of a tensor power, the fact that symmetric averaging is trivial on the unique degree-zero-dimensional fiber, the extensionality for superoperators and the extensionality for completely positive maps.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`



```

theorem symmetricAverage_of_le_one (A k : Nat) (hA : A <= 1) :
  symmetricAverage A k =
    Superoperator.identity (tensorPowerDimension A k) := by
interval_cases A
* cases k with
| zero => exact symmetricAverage_zero_zero
| succ k =>
  apply Superoperator.ext
  apply CPMMap.ext
  ext a b
  have : IsEmpty (Fin (tensorPowerDimension 0 (k + 1))) := by
    simp [tensorPowerDimension]
  exact isEmptyElim a.1
* exact symmetricAverage_one k

```

#### 4.4.435 Coordinate form of the Yoneda degree unit in the series

**Statement.** Coordinate form of the Yoneda degree unit in the series.

**Proof.** By definition. Unfolding the exponential degree unit turns the left-hand side, the exponential degree unit of  $A$ ,  $k$ ,  $j$ , into the right-hand side, an explicit expression in the symmetry, the symmetric power projection, the dimension of a tensor power and the identity; the two sides are the same term.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidAdmissible.lean](#)

```

theorem bangDegreeUnit_apply (A k j : Nat) :
  bangDegreeUnit A k j =
    if h : j = k then
      h.symm |>
        (symmetricPowerProjection A k).app
          (tensorPowerDimension A k)
          (Superoperator.identity (tensorPowerDimension A k))
    else 0 :=
  rfl

```

#### 4.4.436 Diagonal slot of a square injection recovers the injected channel

**Statement.** Diagonal slot of a square injection recovers the injected channel.

**Proof.** The goal is simplified using the definition of the countable representable Day tensor product injection, the definition of the composition and the definition of the countable product injection.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidAdmissible.lean](#)

```

theorem injection_square_eq_slot (A p q n : Nat)
  (? : Superoperator n
    (tensorPowerDimension A p * tensorPowerDimension A q)) :
  (countableRepresentableDayTensorInjection
    (tensorPowerDimension A) (tensorPowerDimension A) p q).app n ? p q =
    ? := by
  dsimp [countableRepresentableDayTensorInjection, Hom.comp,
    countableProductInjection]
  simp only [reduceDItel]

```

#### 4.4.437 Off-row slots of a square injection vanish

**Statement.** Off-row slots of a square injection vanish.

**Proof.** The goal is simplified using the definition of the countable representable Day tensor product injection, the definition of the composition, the definition of the countable product injection and the hypothesis that  $i \neq p$ .

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```
theorem injection_square_eq_zero_left (A p q n i j : Nat) (hi : i != p)
  (? : Superoperator n
    (tensorPowerDimension A p * tensorPowerDimension A q)) :
  (countableRepresentableDayTensorInjection
    (tensorPowerDimension A) (tensorPowerDimension A) p q).app n ? i j =
    0 := by
  dsimp [countableRepresentableDayTensorInjection, Hom.comp,
    countableProductInjection]
  simp only [hi, reduceDItel]
  rfl
```

#### 4.4.438 Off-column slots of a square injection vanish

**Statement.** Off-column slots of a square injection vanish.

**Proof.** The goal is simplified using the definition of the countable representable Day tensor product injection, the definition of the composition, the definition of the countable product injection and the hypothesis that  $j \neq q$ .

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```
theorem injection_square_eq_zero_right (A p q n j : Nat) (hj : j != q)
  (? : Superoperator n
    (tensorPowerDimension A p * tensorPowerDimension A q)) :
  (countableRepresentableDayTensorInjection
    (tensorPowerDimension A) (tensorPowerDimension A) p q).app n ? p j =
    0 := by
  dsimp [countableRepresentableDayTensorInjection, Hom.comp,
    countableProductInjection]
  simp only [reduceDItel, hj]
  rfl
```

#### 4.4.439 Compare of the exponential comultiplication component, when it is at most one

**Statement.** For  $A \leq 1$ , Day compare on a homogeneous comult component is the corresponding square injection of the contraction slot.

**Proof.** Both sides are compared pointwise (by extensionality). The argument splits on the relevant condition. An equation between variables is used to substitute one for the other. The key step rewrites with the definition of the symmetric series Day compare, the definition of the lift, the coordinate form of the Yoneda degree unit in the series and the composition of the identity for superoperators.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```

theorem compare_bangComultComponent_of_le_one (A : Nat) (hA : A <= 1)
  (p q n : Nat) (x : ((bang A).obj n).Carrier) :
  (symmetricSeriesDayCompare A).app n
    ((bangComultComponent A p q).app n x) =
    (countableRepresentableDayTensorInjection
      (tensorPowerDimension A) (tensorPowerDimension A) p q).app n
      ((bangSplitComponent A p q).app n x) := by
have he :=
  bangComultComponent_evaluate A p q n x
  (symmetricFormalTensorSquare A) (symmetricSeriesDayBilinear A)
have he' :
  (symmetricSeriesDayCompare A).app n
    ((bangComultComponent A p q).app n x) =
    (symmetricFormalTensorSquare A).act
      ((symmetricSeriesDayBilinear A).app
        (bangDegreeUnit A p) (bangDegreeUnit A q))
      ((bangSplitComponent A p q).app n x) := by
  simpa [symmetricSeriesDayCompare, DayCoend.lift] using he
rw [he']
funext i j
change
  Superoperator.comp
    (Superoperator.tensor
      (bangDegreeUnit A p i).val
      (bangDegreeUnit A q j).val)
    ((bangSplitComponent A p q).app n x) =
    (countableRepresentableDayTensorInjection
      (tensorPowerDimension A) (tensorPowerDimension A) p q).app n
      ((bangSplitComponent A p q).app n x) i j
let ? : Superoperator n
  (tensorPowerDimension A p * tensorPowerDimension A q) :=
  (bangSplitComponent A p q).app n x
by_cases hi : i = p
* subst i
  by_cases hj : j = q
  * subst j
    have hup :
      bangDegreeUnit A p p =
      (symmetricPowerProjection A p).app
        (tensorPowerDimension A p)
        (Superoperator.identity (tensorPowerDimension A p)) := by
      simp [bangDegreeUnit_apply]
    have huq :
      bangDegreeUnit A q q =
      (symmetricPowerProjection A q).app
        (tensorPowerDimension A q)
        (Superoperator.identity (tensorPowerDimension A q)) := by
      simp [bangDegreeUnit_apply]
    rw [hup, huq]
  change Superoperator.comp
    (Superoperator.tensor
      (Superoperator.comp (symmetricAverage A p)
        (Superoperator.identity _))
      (Superoperator.comp (symmetricAverage A q)
        (Superoperator.identity _)))
    ? =

```

```

(countableRepresentableDayTensorInjection
  (tensorPowerDimension A) (tensorPowerDimension A) p q).app n ? p q
rw [Superoperator.comp_identity, Superoperator.comp_identity,
  symmetricAverage_of_le_one A p hA,
  symmetricAverage_of_le_one A q hA,
  Superoperator.tensor_identity, Superoperator.identity_comp,
  injection_square_eq_slot]
* have huq : bangDegreeUnit A q j =
  (0 : SymmetricElement A j (tensorPowerDimension A q)) := by
  simp [bangDegreeUnit_apply, hj]; rfl
have hten :
  Superoperator.tensor (bangDegreeUnit A p p).val
    (bangDegreeUnit A q j).val =
  (0 : Superoperator
    (tensorPowerDimension A p * tensorPowerDimension A q)
    (tensorPowerDimension A p * tensorPowerDimension A j)) := by
have hz : (bangDegreeUnit A q j).val =
  (0 : Superoperator (tensorPowerDimension A q)
    (tensorPowerDimension A j)) := by
  rw [huq, SymmetricElement.zero_val]
  rw [hz]
  exact Superoperator.tensor_zero_right _
have hL :
  Superoperator.comp
    (Superoperator.tensor (bangDegreeUnit A p p).val
      (bangDegreeUnit A q j).val) ? =
  (0 : Superoperator n
    (tensorPowerDimension A p * tensorPowerDimension A j)) := by
  rw [hten]
  exact Superoperator.comp_zero_left
  (? := tensorPowerDimension A p * tensorPowerDimension A j) ?
have hR :
  (countableRepresentableDayTensorInjection
    (tensorPowerDimension A) (tensorPowerDimension A) p q).app n ? p j =
  (0 : Superoperator n
    (tensorPowerDimension A p * tensorPowerDimension A j)) :=
  injection_square_eq_zero_right A p q n j hj ?
  exact hL.trans hR.symm
* have hup : bangDegreeUnit A p i =
  (0 : SymmetricElement A i (tensorPowerDimension A p)) := by
  simp [bangDegreeUnit_apply, hi]; rfl
have hten :
  Superoperator.tensor (bangDegreeUnit A p i).val
    (bangDegreeUnit A q j).val =
  (0 : Superoperator
    (tensorPowerDimension A p * tensorPowerDimension A q)
    (tensorPowerDimension A i * tensorPowerDimension A j)) := by
have hz : (bangDegreeUnit A p i).val =
  (0 : Superoperator (tensorPowerDimension A p)
    (tensorPowerDimension A i)) := by
  rw [hup, SymmetricElement.zero_val]
  rw [hz]
  exact Superoperator.tensor_zero_left _
have hL :
  Superoperator.comp
    (Superoperator.tensor (bangDegreeUnit A p i).val

```

```

      (bangDegreeUnit A q j).val) ? =
    (0 : Superoperator n
      (tensorPowerDimension A i * tensorPowerDimension A j)) := by
  rw [hten]
  exact Superoperator.comp_zero_left
    (? := tensorPowerDimension A i * tensorPowerDimension A j) ?
  have hR :
    (countableRepresentableDayTensorInjection
      (tensorPowerDimension A) (tensorPowerDimension A) p q).app n ? i j =
    (0 : Superoperator n
      (tensorPowerDimension A i * tensorPowerDimension A j)) :=
    injection_square_eq_zero_left A p q n i j hi ?
  exact hL.trans hR.symm

```

#### 4.4.440 For $A \leq 1$ , Day comultiplication factors coefficientwise contraction through the Day comparison

**Statement.** For  $A \leq 1$ , Day comultiplication factors coefficientwise contraction through the Day comparison. Formally:  $\text{Hom.comp (symmetricSeriesDayCompare A) (bangComult A h) = symmetricContraction A}$ .

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the definition of the exponential comultiplication component family, the fact that each homogeneous component of coefficientwise contraction is the split used by exponential comultiplication component, the definition of the symmetric series Day compare and the definition of the lift.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```

theorem bangComult_factors_contraction_of_le_one (A : Nat) (hA : A <= 1)
  (h : BangComultComponentsAdmissible A) :
  Hom.comp (symmetricSeriesDayCompare A) (bangComult A h) =
    symmetricContraction A := by
  ext n x
  have hsum :
    (symmetricFormalTensorSquare A).obj n |>.HasSum
      (fun pq : Nat x Nat =>
        (countableRepresentableDayTensorInjection
          (tensorPowerDimension A) (tensorPowerDimension A)
            pq.1 pq.2).app n
          ((symmetricContraction A).app n x pq.1 pq.2))
        ((symmetricContraction A).app n x) :=
    countableRepresentableDayTensor_hasSum_coordinates
      (tensorPowerDimension A) (tensorPowerDimension A) n
      ((symmetricContraction A).app n x)
  have hfam :
    (fun pq : Nat x Nat =>
      (symmetricSeriesDayCompare A).app n
        (bangComultComponentFamily A n x pq)) =
    fun pq : Nat x Nat =>
      (countableRepresentableDayTensorInjection
        (tensorPowerDimension A) (tensorPowerDimension A)
          pq.1 pq.2).app n
        ((symmetricContraction A).app n x pq.1 pq.2) := by
  funext pq

```

```

simpa [bangComultComponentFamily, bangSplitComponent_eq_contraction_slot]
  using compare_bangComultComponent_of_le_one A hA pq.1 pq.2 n x
have hcmp :
  (symmetricFormalTensorSquare A).obj n |>.HasSum
  (fun pq : Nat x Nat =>
    (symmetricSeriesDayCompare A).app n
    (bangComultComponentFamily A n x pq))
  ((symmetricSeriesDayCompare A).app n (bangComultApp A h n x)) := by
simpa [symmetricSeriesDayCompare, DayCoend.lift] using
  bangComultApp_hasSum A h n x
  (symmetricFormalTensorSquare A) (symmetricSeriesDayBilinear A)
rw [hfam] at hcmp
exact
  ((symmetricFormalTensorSquare A).obj n).summation.unique hcmp hsum

```

#### 4.4.441 Unconditional Day factorization of contraction when $A \leq 1$

**Statement.** Unconditional Day factorization of contraction when  $A \leq 1$ . Formally:  $\text{Hom.comp (symmetricSeriesDayCompare A) (bangComult\_of\_le\_one A hA) = symmetricContraction A}$ .

**Proof.** This is an instance of the for  $A \leq 1$ , Day comultiplication factors coefficientwise contraction through the Day comparison, applied to the hypothesis that  $A \leq 1$ .

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidAdmissible.lean](#)

```

theorem bangComult_factors_contraction_le_one (A : Nat) (hA : A <= 1) :
  Hom.comp (symmetricSeriesDayCompare A) (bangComult_of_le_one A hA) =
    symmetricContraction A :=
  bangComult_factors_contraction_of_le_one A hA
  (bangComultComponentsAdmissible_of_le_one A hA)

```

#### 4.4.442 Day factorization residual closed for $A \leq 1$

**Statement.** Day factorization residual closed for  $A \leq 1$ . Formally:  $\text{SymmetricContractionDayFactorization A}$ .

**Proof.** The witness is assembled directly from its components, using the definition of the exponential comultiplication of order one.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidAdmissible.lean](#)

```

theorem symmetricContractionDayFactorization_of_le_one (A : Nat) (hA : A <= 1) :
  SymmetricContractionDayFactorization A :=
  <bangComult_of_le_one A hA, bangComult_factors_contraction_le_one A hA>

```

#### 4.4.443 Day comonoid package for $A \leq 1$ : admissibility plus factorization

**Statement.** Day comonoid package for  $A \leq 1$ : admissibility plus factorization. Formally:  $\text{BangDayComonoid A}$ .

**Proof.** The witness is assembled directly from its components, using the admissibility for the two fibers where the acted outer series lands in fiber 1 (so act sum from one applies).

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidAdmissible.lean`

```
theorem bangDayComonoid_of_le_one (A : Nat) (hA : A ≤ 1) :
  BangDayComonoid A :=
  <bangComultComponentsAdmissible_of_le_one A hA,
    symmetricContractionDayFactorization_of_le_one A hA>
```

#### 4.4.444 Day coassociativity for $A = 0$

**Statement.** `##` Day coassociativity for  $A = 0$ . Formally: `(bangDegreeUnit 0 0 0).val = Superoperator.identity (tensorPowerDimension 0 0)`.

**Proof.** The key step rewrites with the coordinate form of the Yoneda degree unit in the series, the composition of the identity for superoperators and the for  $A \leq 1$ , symmetric averaging coincides with the identity channel. The claim is decidable and is checked by exhaustive evaluation.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCoassoc.lean`

```
theorem bangDegreeUnit_zero_zero_val :
  (bangDegreeUnit 0 0 0).val =
    Superoperator.identity (tensorPowerDimension 0 0) := by
  simp only [bangDegreeUnit_apply, reduceDite]
  change Superoperator.comp (symmetricAverage 0 0)
    (Superoperator.identity (tensorPowerDimension 0 0)) =
    Superoperator.identity (tensorPowerDimension 0 0)
  rw [Superoperator.comp_identity, symmetricAverage_of_le_one 0 0 (by decide)]
```

#### 4.4.445 Comultiplication of the exponential of the degree unit of zero

**Statement.** The application of the dimension of a tensor power at 0, 0 and the exponential degree unit at 0, 0 equals an explicit expression in the introduction, the exponential modality and the exponential degree unit.

**Proof.** The key step rewrites with the fact that for  $A = 0$  the Day comultiplication is exactly the  $(0, 0)$  homogeneous component (singleton coend sum), the Day braiding / cocommutativity for  $A \leq 1$ , the definition of the exponential split component and the Day coassociativity for  $A = 0$ .

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCoassoc.lean`

```
theorem bangComult_degreeUnit_zero :
  bangComult_zero.app (tensorPowerDimension 0 0) (bangDegreeUnit 0 0) =
    (DayCoend.intro (bang 0) (bang 0)).app
    (bangDegreeUnit 0 0) (bangDegreeUnit 0 0) := by
  rw [bangComult_zero_eq_component, bangComultComponent_eq_act]
  simp only [bangSplitComponent]
  rw [bangDegreeUnit_zero_zero_val, Superoperator.comp_identity]
  have hsplit :
    Superoperator.ofEquivalence (tensorSplitEquiv 0 0 0) =
      Superoperator.ofEquivalence
        (Equiv.refl (Fin (tensorPowerDimension 0 0 * tensorPowerDimension 0 0))) :=
```

```

    ofEquivalence_dim_one rfl rfl _ _
  rw [hsplit, Superoperator.ofEquivalence_refl]
  exact (dayTensor (bang 0) (bang 0)).act_id _

```

#### 4.4.446 Coassociativity of the exponential modality, at zero

**Statement.** The composite of the associator of  $\text{bang } 0, \text{bang } 0, \text{bang } 0$  after the composite of  $\text{DayTensor.map bangComult\_zero (Hom.id (bang 0))}$  after  $\text{bangComult\_zero}$  equals the composite of the functorial action of  $\text{Hom.id (bang 0)}$  and  $\text{bangComult\_zero}$  after the exponential multiplication zero.

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the fact that for  $A = 0$  the Day comultiplication is exactly the  $(0, 0)$  homogeneous component (singleton coend sum), the Day braiding / cocommutativity for  $A \leq 1$ , the functorial action for observational equalities and the functorial action on an introduced element.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCoassoc.lean`

```

theorem bang_coassociative_zero :
  Hom.comp (DayTensor.associator (bang 0) (bang 0) (bang 0))
    (Hom.comp (DayTensor.map bangComult_zero (Hom.id (bang 0)))
      bangComult_zero) =
  Hom.comp (DayTensor.map (Hom.id (bang 0)) bangComult_zero)
    bangComult_zero := by
  ext n x
  set ? : Superoperator n
  (tensorPowerDimension 0 0 * tensorPowerDimension 0 0) :=
  (bangSplitComponent 0 0 0).app n x with h?
  have h?x : bangComult_zero.app n x =
    (dayTensor (bang 0) (bang 0)).act
      ((DayCoend.intro (bang 0) (bang 0)).app
        (bangDegreeUnit 0 0) (bangDegreeUnit 0 0)) ? := by
  rw [bangComult_zero_eq_component, bangComultComponent_eq_act]
  have hR :
    (DayTensor.map (Hom.id (bang 0)) bangComult_zero).app n
      (bangComult_zero.app n x) =
    (dayTensor (bang 0) (dayTensor (bang 0) (bang 0))).act
      ((DayCoend.intro (bang 0) (dayTensor (bang 0) (bang 0))).app
        (bangDegreeUnit 0 0)
        ((DayCoend.intro (bang 0) (bang 0)).app
          (bangDegreeUnit 0 0) (bangDegreeUnit 0 0)))) ? := by
  rw [h?x,
    (DayTensor.map (Hom.id (bang 0)) bangComult_zero).naturality]
  rw [DayTensor.map_intro, Hom.id_app, bangComult_degreeUnit_zero]
  rfl
  have hL_map :
    (DayTensor.map bangComult_zero (Hom.id (bang 0))).app n
      (bangComult_zero.app n x) =
    (dayTensor (dayTensor (bang 0) (bang 0)) (bang 0)).act
      ((DayCoend.intro (dayTensor (bang 0) (bang 0)) (bang 0)).app
        ((DayCoend.intro (bang 0) (bang 0)).app
          (bangDegreeUnit 0 0) (bangDegreeUnit 0 0))
        (bangDegreeUnit 0 0)) ? := by
  rw [h?x,

```



```

      (DayTensor.map bangComult_zero (Hom.id (bang 0))).naturalities]
    rw [DayTensor.map_intro, Hom.id_app, bangComult_degreeUnit_zero]
    rfl
  have hL :
    (DayTensor.associator (bang 0) (bang 0) (bang 0)).app n
      ((DayTensor.map bangComult_zero (Hom.id (bang 0))).app n
        (bangComult_zero.app n x)) =
    (dayTensor (bang 0) (dayTensor (bang 0) (bang 0))).act
      ((DayCoend.intro (bang 0) (dayTensor (bang 0) (bang 0))).app
        (bangDegreeUnit 0 0)
        ((DayCoend.intro (bang 0) (bang 0)).app
          (bangDegreeUnit 0 0) (bangDegreeUnit 0 0)))
    (Superoperator.comp
      (Superoperator.tensorAssociator
        (tensorPowerDimension 0 0) (tensorPowerDimension 0 0)
        (tensorPowerDimension 0 0)) ?) := by
  rw [hL_map]
  set gen :=
    (DayCoend.intro (dayTensor (bang 0) (bang 0)) (bang 0)).app
      ((DayCoend.intro (bang 0) (bang 0)).app
        (bangDegreeUnit 0 0) (bangDegreeUnit 0 0))
    (bangDegreeUnit 0 0)
  rw [(DayTensor.associator (bang 0) (bang 0) (bang 0)).naturalities gen ?]
  rw [DayTensor.associator_intro_intro]
  exact (dayTensor (bang 0) (dayTensor (bang 0) (bang 0))).act_comp _ _ _
change
  (DayTensor.associator (bang 0) (bang 0) (bang 0)).app n
    ((DayTensor.map bangComult_zero (Hom.id (bang 0))).app n
      (bangComult_zero.app n x)) =
  (DayTensor.map (Hom.id (bang 0)) bangComult_zero).app n
    (bangComult_zero.app n x)
  rw [hL, hR]
  congr 1
  have hA :
    Superoperator.tensorAssociator
      (tensorPowerDimension 0 0) (tensorPowerDimension 0 0)
      (tensorPowerDimension 0 0) =
    Superoperator.ofEquivalence
      (Equiv.refl
        (Fin (tensorPowerDimension 0 0 * tensorPowerDimension 0 0))) :=
    ofEquivalence_dim_one rfl rfl _ _
  rw [hA, Superoperator.ofEquivalence_refl]
  exact Superoperator.identity_comp ?

/-! ## Day coassociativity for `A = 1` -/

```

#### 4.4.447 Day coassociativity for $A = 1$

**Statement.** ## Day coassociativity for  $A = 1$ . Formally:  $(h \triangleright x : (M.obj\ b).Carrier) = M.act\ x\ (Superoperator.ofEquivalence\ (finCongr\ h.symm))$ .

**Proof.** By induction on the derivation that  $a = b$ . The key step rewrites with standard identities for equivalences and the reflexivity of the map induced by an index equivalence.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCoassoc.lean`

```
theorem eq_rec_act_ofEquivalence {M : Module} {a b : Nat}
  (h : a = b) (x : (M.obj a).Carrier) :
  (h |> x : (M.obj b).Carrier) =
    M.act x (Superoperator.ofEquivalence (finCongr h.symm)) := by
  induction h
  change x = M.act x (Superoperator.ofEquivalence (finCongr (Eq.refl a)).symm)
  rw [finCongr_refl, Equiv.refl_symm, Superoperator.ofEquivalence_refl,
    M.act_id]
```

#### 4.4.448 Exponential comultiplication component of the degree unit of one

**Statement.** For natural numbers  $p, q$ : an explicit expression in the exponential comultiplication component, the dimension of a tensor power and the exponential degree unit equals an explicit expression in the tensor product power dimension multiplication addition, the introduction, the exponential modality and the exponential degree unit.

**Proof.** The key step rewrites with the Day coassociativity for  $A = 1$ , the Day braiding / cocommutativity for  $A \leq 1$ , the definition of the exponential split component and the coordinate form of the Yoneda degree unit in the series.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCoassoc.lean`

```
theorem bangComultComponent_degreeUnit_one (p q : Nat) :
  (bangComultComponent 1 p q).app (tensorPowerDimension 1 (p + q))
    (bangDegreeUnit 1 (p + q)) =
    (tensorPowerDimension_mul_add 1 p q) |>
      ((DayCoend.intro (bang 1) (bang 1)).app
        (bangDegreeUnit 1 p) (bangDegreeUnit 1 q)) := by
  have hpq := tensorPowerDimension_one_eq (p + q)
  have hmul := tensorPowerDimension_mul_add 1 p q
  rw [eq_rec_act_ofEquivalence, bangComultComponent_eq_act]
  simp only [bangSplitComponent]
  have hval :
    (bangDegreeUnit 1 (p + q) (p + q)).val =
      Superoperator.identity (tensorPowerDimension 1 (p + q)) := by
  simp only [bangDegreeUnit_apply, reduceDItel]
  change Superoperator.comp (symmetricAverage 1 (p + q))
    (Superoperator.identity _) = Superoperator.identity _
  rw [Superoperator.comp_identity,
    symmetricAverage_of_le_one 1 (p + q) (by decide)]
  rw [hval, Superoperator.comp_identity]
  have hsplit :
    Superoperator.ofEquivalence (tensorSplitEquiv 1 p q) =
      Superoperator.ofEquivalence (finCongr hmul.symm) :=
    ofEquivalence_dim_one hpq (by simp) _ _
  rw [hsplit]
```

#### 4.4.449 Exponential split of the coassociativity of the channel of one

**Statement.** For natural numbers  $p, q, r, n$ : an explicit expression in the composition, the tensor associator, the dimension of a tensor power and the tensor product equals an explicit expression in the composition, the

tensor product, the identity and the dimension of a tensor power.

**Proof.** The claim follows from a chain of equalities (or inequalities). The key step rewrites with the map induced by an index equivalence of a composite for superoperators, the definition of the exponential split component and the tensor product of a map induced by an index equivalence.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCoassoc.lean`

```
theorem bangSplit_coassoc_channel_one (p q r n : Nat)
  (x : ((bang 1).obj n).Carrier) :
  Superoperator.comp
    (Superoperator.tensorAssociator
      (tensorPowerDimension 1 p) (tensorPowerDimension 1 q)
      (tensorPowerDimension 1 r))
    (Superoperator.comp
      (Superoperator.tensor
        (Superoperator.ofEquivalence
          (finCongr (tensorPowerDimension_mul_add 1 p q).symm))
          (Superoperator.identity (tensorPowerDimension 1 r)))
        ((bangSplitComponent 1 (p + q) r).app n x)) =
  Superoperator.comp
    (Superoperator.tensor
      (Superoperator.identity (tensorPowerDimension 1 p))
      (Superoperator.ofEquivalence
        (finCongr (tensorPowerDimension_mul_add 1 q r).symm)))
    ((bangSplitComponent 1 p (q + r)).app n x) := by
have hsrc : tensorPowerDimension 1 (p + (q + r)) = 1 :=
  tensorPowerDimension_one_eq _
have htgt : tensorPowerDimension 1 p *
  (tensorPowerDimension 1 q * tensorPowerDimension 1 r) = 1 := by
  simp
have hassoc : (p + q) + r = p + (q + r) := Nat.add_assoc p q r
let eDeg := finCongr (congrArg (tensorPowerDimension 1) hassoc)
have hx :
  (x ((p + q) + r)).val =
  Superoperator.comp
    (Superoperator.ofEquivalence eDeg.symm)
    (x (p + (q + r))).val := by
have hfwd :
  Superoperator.comp
    (Superoperator.ofEquivalence eDeg)
    (x ((p + q) + r)).val =
  (x (p + (q + r))).val :=
  (SymmetricElement.val_degreeCast hassoc (x ((p + q) + r))).trans
  (congrArg SymmetricElement.val
    (SymmetricElement.family_degreeCast x hassoc))
have hcancel :
  Superoperator.comp
    (Superoperator.ofEquivalence eDeg.symm)
    (Superoperator.ofEquivalence eDeg) =
  Superoperator.identity (tensorPowerDimension 1 ((p + q) + r)) := by
rw [Superoperator.ofEquivalence_comp]
convert Superoperator.ofEquivalence_refl _
exact Equiv.symm_trans_self _
calc
  (x ((p + q) + r)).val =
    Superoperator.comp
```

```

      (Superoperator.identity (tensorPowerDimension 1 ((p + q) + r)))
      (x ((p + q) + r)).val :=
    (Superoperator.identity_comp _).symm
  _ = Superoperator.comp
    (Superoperator.comp
      (Superoperator.ofEquivalence eDeg.symm)
      (Superoperator.ofEquivalence eDeg))
      (x ((p + q) + r)).val := by rw [ <- hcancel]
  _ = Superoperator.comp
    (Superoperator.ofEquivalence eDeg.symm)
    (Superoperator.comp
      (Superoperator.ofEquivalence eDeg)
      (x ((p + q) + r)).val) :=
    (Superoperator.comp_assoc _ _ _).symm
  _ = Superoperator.comp
    (Superoperator.ofEquivalence eDeg.symm)
    (x (p + (q + r))).val :=
    congrArg _ h fwd
let e_pq := finCongr (tensorPowerDimension_mul_add 1 p q).symm
let e_qr := finCongr (tensorPowerDimension_mul_add 1 q r).symm
let e_splitL := tensorSplitEquiv 1 (p + q) r
let e_splitR := tensorSplitEquiv 1 p (q + r)
let e_Assoc := Superoperator.tensorAssociatorEquiv
  (tensorPowerDimension 1 p) (tensorPowerDimension 1 q)
  (tensorPowerDimension 1 r)
simp only [bangSplitComponent]
rw [hx]
have hidr :
  Superoperator.identity (tensorPowerDimension 1 r) =
  Superoperator.ofEquivalence (Equiv.refl _) :=
  (Superoperator.ofEquivalence_refl _).symm
have hidp :
  Superoperator.identity (tensorPowerDimension 1 p) =
  Superoperator.ofEquivalence (Equiv.refl _) :=
  (Superoperator.ofEquivalence_refl _).symm
have htenL :
  Superoperator.tensor
    (Superoperator.ofEquivalence e_pq)
    (Superoperator.identity (tensorPowerDimension 1 r)) =
  Superoperator.ofEquivalence
    (Superoperator.tensorEquiv e_pq (Equiv.refl _)) := by
  rw [hidr, Superoperator.tensor_ofEquivalence]
have htenR :
  Superoperator.tensor
    (Superoperator.identity (tensorPowerDimension 1 p))
    (Superoperator.ofEquivalence e_qr) =
  Superoperator.ofEquivalence
    (Superoperator.tensorEquiv (Equiv.refl _) e_qr) := by
  rw [hidp, Superoperator.tensor_ofEquivalence]
rw [htenL, htenR]
change
  Superoperator.comp (Superoperator.ofEquivalence e_Assoc)
  (Superoperator.comp
    (Superoperator.ofEquivalence
      (Superoperator.tensorEquiv e_pq (Equiv.refl _)))
    (Superoperator.comp

```

```

      (Superoperator.ofEquivalence e_splitL)
      (Superoperator.comp
        (Superoperator.ofEquivalence eDeg.symm)
        (x (p + (q + r))).val))) =
Superoperator.comp
  (Superoperator.ofEquivalence
    (Superoperator.tensorEquiv (Equiv.refl _) e_qr))
    (Superoperator.comp
      (Superoperator.ofEquivalence e_splitR)
      (x (p + (q + r))).val)
have hcollapseL :
  Superoperator.comp (Superoperator.ofEquivalence e_Assoc)
    (Superoperator.comp
      (Superoperator.ofEquivalence
        (Superoperator.tensorEquiv e_pq (Equiv.refl _)))
        (Superoperator.comp
          (Superoperator.ofEquivalence e_splitL)
          (Superoperator.ofEquivalence eDeg.symm))) =
  Superoperator.ofEquivalence
    (((eDeg.symm.trans e_splitL).trans
      (Superoperator.tensorEquiv e_pq (Equiv.refl _))).trans
      e_Assoc)) := by
  rw [Superoperator.ofEquivalence_comp, Superoperator.ofEquivalence_comp,
    Superoperator.ofEquivalence_comp]
have hcollapseR :
  Superoperator.comp
    (Superoperator.ofEquivalence
      (Superoperator.tensorEquiv (Equiv.refl _) e_qr))
      (Superoperator.ofEquivalence e_splitR) =
  Superoperator.ofEquivalence
    (e_splitR.trans
      (Superoperator.tensorEquiv (Equiv.refl _) e_qr)) :=
  Superoperator.ofEquivalence_comp _ _
have hreL :
  Superoperator.comp (Superoperator.ofEquivalence e_Assoc)
    (Superoperator.comp
      (Superoperator.ofEquivalence
        (Superoperator.tensorEquiv e_pq (Equiv.refl _)))
        (Superoperator.comp
          (Superoperator.ofEquivalence e_splitL)
          (Superoperator.comp
            (Superoperator.ofEquivalence eDeg.symm)
            (x (p + (q + r))).val))) =
  Superoperator.comp
    (Superoperator.comp (Superoperator.ofEquivalence e_Assoc)
      (Superoperator.comp
        (Superoperator.ofEquivalence
          (Superoperator.tensorEquiv e_pq (Equiv.refl _)))
          (Superoperator.comp
            (Superoperator.ofEquivalence e_splitL)
            (Superoperator.ofEquivalence eDeg.symm))))
    (x (p + (q + r))).val := by
  simp only [Superoperator.comp_assoc]
have hreR :
  Superoperator.comp
    (Superoperator.ofEquivalence

```

```

      (Superoperator.tensorEquiv (Equiv.refl _) e_qr))
    (Superoperator.comp
      (Superoperator.ofEquivalence e_splitR)
      (x (p + (q + r))).val) =
    Superoperator.comp
      (Superoperator.comp
        (Superoperator.ofEquivalence
          (Superoperator.tensorEquiv (Equiv.refl _) e_qr))
          (Superoperator.ofEquivalence e_splitR))
        (x (p + (q + r))).val := by
      simp only [Superoperator.comp_assoc]
    rw [hreL, hreR, hcollapseL, hcollapseR]
    exact congrArg (fun t => Superoperator.comp t (x (p + (q + r))).val)
      (ofEquivalence_dim_one hsrc htgt _ _)

```

#### 4.4.450 Coassociativity of the exponential comultiplication component, at one

**Statement.** For natural numbers  $p, q, r, n$ : an explicit expression in the associator, the exponential modality, the functorial action and the exponential comultiplication component equals an explicit expression in the functorial action, the exponential modality and the exponential comultiplication component.

**Proof.** The key step rewrites with the Day braiding / cocommutativity for  $A \leq 1$ , the functorial action for observational equalities, the functorial action on an introduced element and the components of the identity.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCoassoc.lean`

```

theorem bangComultComponent_coassoc_one (p q r n : Nat)
  (x : ((bang 1).obj n).Carrier) :
  (DayTensor.associator (bang 1) (bang 1) (bang 1)).app n
    ((DayTensor.map (bangComultComponent 1 p q) (Hom.id (bang 1))).app n
      ((bangComultComponent 1 (p + q) r).app n x)) =
  (DayTensor.map (Hom.id (bang 1)) (bangComultComponent 1 q r)).app n
    ((bangComultComponent 1 p (q + r)).app n x) := by
  set up := bangDegreeUnit 1 p
  set uq := bangDegreeUnit 1 q
  set ur := bangDegreeUnit 1 r
  set upq := bangDegreeUnit 1 (p + q)
  set uqr := bangDegreeUnit 1 (q + r)
  set gen_pq := (DayCoend.intro (bang 1) (bang 1)).app up uq
  set gen_qr := (DayCoend.intro (bang 1) (bang 1)).app uq ur
  set gen_final :=
    (DayCoend.intro (bang 1) (dayTensor (bang 1) (bang 1))).app up gen_qr
  set e_pq := Superoperator.ofEquivalence
    (finCongr (tensorPowerDimension_mul_add 1 p q).symm)
  set e_qr := Superoperator.ofEquivalence
    (finCongr (tensorPowerDimension_mul_add 1 q r).symm)
  set Assoc := Superoperator.tensorAssociator
    (tensorPowerDimension 1 p) (tensorPowerDimension 1 q)
    (tensorPowerDimension 1 r)
  set ?L : Superoperator n
    (tensorPowerDimension 1 (p + q) * tensorPowerDimension 1 r) :=
    (bangSplitComponent 1 (p + q) r).app n x
  set ?R : Superoperator n
    (tensorPowerDimension 1 p * tensorPowerDimension 1 (q + r)) :=

```

```

    (bangSplitComponent 1 p (q + r)).app n x
set ?L' := Superoperator.comp
    (Superoperator.tensor e_pq
      (Superoperator.identity (tensorPowerDimension 1 r))) ?L
set ?R' := Superoperator.comp
    (Superoperator.tensor
      (Superoperator.identity (tensorPowerDimension 1 p)) e_qr) ?R
have hch : Superoperator.comp Assoc ?L' = ?R' :=
    bangSplit_coassoc_channel_one p q r n x
have hL :
    (DayTensor.associator (bang 1) (bang 1) (bang 1)).app n
      ((DayTensor.map (bangComultComponent 1 p q) (Hom.id (bang 1))).app n
        ((bangComultComponent 1 (p + q) r).app n x)) =
      (dayTensor (bang 1) (dayTensor (bang 1) (bang 1))).act gen_final
        (Superoperator.comp Assoc ?L') := by
rw [bangComultComponent_eq_act 1 (p + q) r n x]
change
    (DayTensor.associator (bang 1) (bang 1) (bang 1)).app n
      ((DayTensor.map (bangComultComponent 1 p q) (Hom.id (bang 1))).app n
        ((dayTensor (bang 1) (bang 1)).act
          ((DayCoend.intro (bang 1) (bang 1)).app upq ur) ?L)) =
    -
rw [(DayTensor.map (bangComultComponent 1 p q) (Hom.id (bang 1))).naturality
  ((DayCoend.intro (bang 1) (bang 1)).app upq ur) ?L]
rw [DayTensor.map_intro, Hom.id_app]
have hdu := bangComultComponent_degreeUnit_one p q
change
    (DayTensor.associator (bang 1) (bang 1) (bang 1)).app n
      ((dayTensor (dayTensor (bang 1) (bang 1)) (bang 1)).act
        ((DayCoend.intro (dayTensor (bang 1) (bang 1)) (bang 1)).app
          ((bangComultComponent 1 p q).app
            (tensorPowerDimension 1 (p + q))
            (bangDegreeUnit 1 (p + q)))
          ur) ?L) =
    -
rw [hdu, eq_rec_act_ofEquivalence]
rw [show ur = (bang 1).act ur (Superoperator.identity _)
  from ((bang 1).act_id _).symm]
rw [(DayCoend.intro (dayTensor (bang 1) (bang 1)) (bang 1)).naturality
  gen_pq ur e_pq (Superoperator.identity _)]
rw [(dayTensor (dayTensor (bang 1) (bang 1)) (bang 1)).act_comp]
set gen3 :=
    (DayCoend.intro (dayTensor (bang 1) (bang 1)) (bang 1)).app gen_pq ur
change
    (DayTensor.associator (bang 1) (bang 1) (bang 1)).app n
      ((dayTensor (dayTensor (bang 1) (bang 1)) (bang 1)).act gen3 ?L') =
    -
rw [(DayTensor.associator (bang 1) (bang 1) (bang 1)).naturality gen3 ?L']
rw [DayTensor.associator_intro_intro]
exact (dayTensor (bang 1) (dayTensor (bang 1) (bang 1))).act_comp _ _ _
have hR :
    (DayTensor.map (Hom.id (bang 1)) (bangComultComponent 1 q r)).app n
      ((bangComultComponent 1 p (q + r)).app n x) =
      (dayTensor (bang 1) (dayTensor (bang 1) (bang 1))).act gen_final
        ?R' := by
rw [bangComultComponent_eq_act 1 p (q + r) n x]

```

```

change
  (DayTensor.map (Hom.id (bang 1)) (bangComultComponent 1 q r)).app n
    ((dayTensor (bang 1) (bang 1)).act
      ((DayCoend.intro (bang 1) (bang 1)).app up uqr) ?R) =
  _
rw [(DayTensor.map (Hom.id (bang 1)) (bangComultComponent 1 q r)).naturality
  ((DayCoend.intro (bang 1) (bang 1)).app up uqr) ?R]
rw [DayTensor.map_intro, Hom.id_app]
have hdu := bangComultComponent_degreeUnit_one q r
change
  (dayTensor (bang 1) (dayTensor (bang 1) (bang 1))).act
    ((DayCoend.intro (bang 1) (dayTensor (bang 1) (bang 1))).app
      up
        ((bangComultComponent 1 q r).app
          (tensorPowerDimension 1 (q + r))
          (bangDegreeUnit 1 (q + r)))) ?R =
  _
rw [hdu, eq_rec_act_ofEquivalence]
rw [show up = (bang 1).act up (Superoperator.identity _)
  from ((bang 1).act_id _).symm]
rw [(DayCoend.intro (bang 1) (dayTensor (bang 1) (bang 1))).naturality
  up gen_qr (Superoperator.identity _) e_qr]
exact (dayTensor (bang 1) (dayTensor (bang 1) (bang 1))).act_comp _ _ _
rw [hL, hR, hch]

```

#### 4.4.451 Comultiplication of the exponential of the summability of the components

**Statement.** For a natural number  $n$ : the family `bangComultComponentFamily 1 n x` sums to `bangComult_one.app n x`.

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the evaluation of itself for Day coends.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidCoassoc.lean`

```

theorem bangComult_hasSum_components (n : Nat)
  (x : ((bang 1).obj n).Carrier) :
  ((dayTensor (bang 1) (bang 1)).obj n).HasSum
    (bangComultComponentFamily 1 n x)
    (bangComult_one.app n x) := by
have h := bangComultApp_hasSum 1 bangComultComponentsAdmissible_one n x
  (dayTensor (bang 1) (bang 1)) (DayCoend.intro (bang 1) (bang 1))
have hfun :
  (fun pq : Nat x Nat =>
    DayCoend.evaluate (dayTensor (bang 1) (bang 1))
      (DayCoend.intro (bang 1) (bang 1))
      (bangComultComponentFamily 1 n x pq)) =
    bangComultComponentFamily 1 n x := by
  funext pq; exact DayCoend.evaluate_self _
have hs := DayCoend.evaluate_self (bangComultApp 1
  bangComultComponentsAdmissible_one n x)
change ((dayTensor (bang 1) (bang 1)).obj n).HasSum
  (fun pq => DayCoend.evaluate (DayCoend.module (bang 1) (bang 1))
    (DayCoend.intro (bang 1) (bang 1))
    (bangComultComponentFamily 1 n x pq))

```



```

      (DayCoend.evaluate (DayCoend.module (bang 1) (bang 1))
        (DayCoend.intro (bang 1) (bang 1))
        (bangComultApp 1 bangComultComponentsAdmissible_one n x)) at h
    rw [hfun, hs] at h
    exact h

```

#### 4.4.452 Exponential comultiplication component of the degree unit, assuming ne

**Statement.** For natural numbers  $p, q, a$ : if  $p + q \neq a$ , then an explicit expression in the exponential comultiplication component, the dimension of a tensor power and the exponential degree unit equals 0.

**Proof.** The key step rewrites with the Day braiding / cocommutativity for  $A \leq 1$ , the definition of the exponential split component, the coordinate form of the Yoneda degree unit in the series and the composition of zero for superoperators, in the right argument.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCoassoc.lean`

```

theorem bangComultComponent_degreeUnit_of_ne (p q a : Nat) (hne : p + q != a) :
  (bangComultComponent 1 p q).app (tensorPowerDimension 1 a)
    (bangDegreeUnit 1 a) = 0 := by
  rw [bangComultComponent_eq_act]
  simp only [bangSplitComponent]
  have hval : (bangDegreeUnit 1 a (p + q)).val = 0 := by
    simp only [bangDegreeUnit_apply, dite_eq_right hne]
    rfl
  rw [hval, Superoperator.comp_zero_right]
  exact (dayTensor (bang 1) (bang 1)).act_zero_map _

```

#### 4.4.453 Summability of the comultiplication of the exponential of the degree unit of the partition

**Statement.** For a natural number  $a$ : the family `fun part` sums to the application of the dimension of a tensor power of  $a$  at 1 and the exponential degree unit of  $a$  at 1.

**Proof.** Both sides are compared pointwise (by extensionality). The argument splits on the relevant condition. The hypotheses are unpacked into their constituent data. The key step rewrites with the degree partition to pair of the second projection of a sum, the exponential comultiplication component of the degree unit, assuming ne and the fact that the constantly-zero family has a sum over every countable index type.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCoassoc.lean`

```

theorem bangComult_degreeUnit_partition_hasSum (a : Nat) :
  ((dayTensor (bang 1) (bang 1)).obj (tensorPowerDimension 1 a)).HasSum
    (fun part : DegreePartition a =>
      (bangComultComponent 1
        (degreePartitionToPair a part).1
        (degreePartitionToPair a part).2).app
        (tensorPowerDimension 1 a) (bangDegreeUnit 1 a))
      (bangComult_one.app (tensorPowerDimension 1 a) (bangDegreeUnit 1 a))) := by
  have hall := bangComult_hasSum_components
    (tensorPowerDimension 1 a) (bangDegreeUnit 1 a)
  have hsigma :
    ((dayTensor (bang 1) (bang 1)).obj (tensorPowerDimension 1 a)).HasSum
      (fun s : Sigma t : Nat, DegreePartition t =>

```

```

      (bangComultComponent 1
        (degreePartitionToPair s.1 s.2).1
        (degreePartitionToPair s.1 s.2).2).app
      (tensorPowerDimension 1 a) (bangDegreeUnit 1 a))
    (bangComult_one.app (tensorPowerDimension 1 a) (bangDegreeUnit 1 a)) :=
  (((dayTensor (bang 1) (bang 1)).obj (tensorPowerDimension 1 a)).summation.reindex
    degreePartitionEquiv.symm
    (bangComultComponentFamily 1 (tensorPowerDimension 1 a) (bangDegreeUnit 1 a))
    (bangComult_one.app (tensorPowerDimension 1 a) (bangDegreeUnit 1 a))).mpr hall
  obtain <row, hrows, hcol> :=
    ((dayTensor (bang 1) (bang 1)).obj (tensorPowerDimension 1 a)).summation.flatten
    (fun t (part : DegreePartition t) =>
      (bangComultComponent 1
        (degreePartitionToPair t part).1
        (degreePartitionToPair t part).2).app
        (tensorPowerDimension 1 a) (bangDegreeUnit 1 a))
      (bangComult_one.app (tensorPowerDimension 1 a) (bangDegreeUnit 1 a)) |>.mp
    hsigma
  have hrow0 (t : Nat) (hne : t != a) : row t = 0 := by
    have hz :
      ((dayTensor (bang 1) (bang 1)).obj (tensorPowerDimension 1 a)).HasSum
      (fun part : DegreePartition t =>
        (bangComultComponent 1
          (degreePartitionToPair t part).1
          (degreePartitionToPair t part).2).app
          (tensorPowerDimension 1 a) (bangDegreeUnit 1 a))
      0 := by
    have hfam0 :
      (fun part : DegreePartition t =>
        (bangComultComponent 1
          (degreePartitionToPair t part).1
          (degreePartitionToPair t part).2).app
          (tensorPowerDimension 1 a) (bangDegreeUnit 1 a)) =
      fun _ => 0 := by
    funext part
    have : (degreePartitionToPair t part).1 +
      (degreePartitionToPair t part).2 != a := by
      rw [degreePartitionToPair_snd_add]; exact hne
      exact bangComultComponent_degreeUnit_of_ne _ _ a this
    rw [hfam0]
    exact Fiber.hasSum_zero _
    exact ((dayTensor (bang 1) (bang 1)).obj _).summation.unique (hrows t) hz
  have hfam :
    (fun t : Nat => row t) =
      fun t : Nat => if h : t = a then row a else (0 : _) := by
    funext t
    by_cases ht : t = a <|> simp [ht, hrow0]
  have hcol' :
    ((dayTensor (bang 1) (bang 1)).obj (tensorPowerDimension 1 a)).HasSum
    (fun t : Nat => if h : t = a then row a else 0)
    (bangComult_one.app (tensorPowerDimension 1 a) (bangDegreeUnit 1 a)) := by
    rwa [← hfam]
  have hsingle :=
    Fiber.hasSum_singleAt
    ((dayTensor (bang 1) (bang 1)).obj (tensorPowerDimension 1 a))
    (a : Nat) (row a)

```

```

have hsum :=
  ((dayTensor (bang 1) (bang 1)).obj _).summation.unique hcol' hsingle
rw [hsum]
exact hrows a

```

#### 4.4.454 Summability of the exponential modality of a mapped family of the comultiplication of the identity of the partition

**Statement.** For natural numbers  $a, b, n$ : the family `fun part sums` to the displayed expression.

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the functorial action for observational equalities, the functorial action on an introduced element and the components of the identity.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCoassoc.lean`

```

theorem bang_map_comult_id_partition_hasSum (a b n : Nat)
  (x : ((bang 1).obj n).Carrier) :
  ((dayTensor (dayTensor (bang 1) (bang 1)) (bang 1)).obj n).HasSum
  (fun part : DegreePartition a =>
    (DayTensor.map
      (bangComultComponent 1
        (degreePartitionToPair a part).1
        (degreePartitionToPair a part).2)
      (Hom.id (bang 1))))).app n
    ((bangComultComponent 1 a b).app n x))
  ((DayTensor.map bangComult_one (Hom.id (bang 1))))).app n
  ((bangComultComponent 1 a b).app n x)) := by
set ? : Superoperator n
  (tensorPowerDimension 1 a * tensorPowerDimension 1 b) :=
  (bangSplitComponent 1 a b).app n x
set gen := (DayCoend.intro (bang 1) (bang 1)).app
  (bangDegreeUnit 1 a) (bangDegreeUnit 1 b)
have hx := bangComultComponent_eq_act 1 a b n x
have h?ua := bangComult_degreeUnit_partition_hasSum a
have hintro :=
  (DayCoend.intro (dayTensor (bang 1) (bang 1)) (bang 1)).map_sum_left
  (bangDegreeUnit 1 b) h?ua
have hact :=
  (dayTensor (dayTensor (bang 1) (bang 1)) (bang 1)).act_sum_element ? hintro
have hfam :
  (fun part : DegreePartition a =>
    (dayTensor (dayTensor (bang 1) (bang 1)) (bang 1)).act
      ((DayCoend.intro (dayTensor (bang 1) (bang 1)) (bang 1)).app
        ((bangComultComponent 1
          (degreePartitionToPair a part).1
          (degreePartitionToPair a part).2).app
          (tensorPowerDimension 1 a) (bangDegreeUnit 1 a))
        (bangDegreeUnit 1 b)) ?) =
    fun part : DegreePartition a =>
      (DayTensor.map
        (bangComultComponent 1
          (degreePartitionToPair a part).1
          (degreePartitionToPair a part).2)
        (Hom.id (bang 1))))).app n

```

```

      ((bangComultComponent 1 a b).app n x) := by
funext part
rw [hx]; symm
rw [(DayTensor.map
  (bangComultComponent 1
    (degreePartitionToPair a part).1
    (degreePartitionToPair a part).2)
  (Hom.id (bang 1))).naturality gen ?,
  DayTensor.map_intro, Hom.id_app]
have hsum :
  (DayTensor.map bangComult_one (Hom.id (bang 1))).app n
    ((bangComultComponent 1 a b).app n x) =
  (dayTensor (dayTensor (bang 1) (bang 1)) (bang 1)).act
    ((DayCoend.intro (dayTensor (bang 1) (bang 1)) (bang 1)).app
      (bangComult_one.app (tensorPowerDimension 1 a) (bangDegreeUnit 1 a))
      (bangDegreeUnit 1 b)) ? := by
  rw [hx, (DayTensor.map bangComult_one (Hom.id (bang 1))).naturality gen ?,
    DayTensor.map_intro, Hom.id_app]
rw [hfam] at hact
rwa [ <- hsum] at hact

```

#### 4.4.455 Summability of the exponential modality of a mapped family of the identity of the comultiplication of the partition

**Statement.** For natural numbers  $a, b, n$ : the family `fun part` sums to the displayed expression.

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the functorial action for observational equalities, the functorial action on an introduced element and the components of the identity.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCoassoc.lean`

```

theorem bang_map_id_comult_partition_hasSum (a b n : Nat)
  (x : ((bang 1).obj n).Carrier) :
  ((dayTensor (bang 1) (dayTensor (bang 1) (bang 1))).obj n).HasSum
    (fun part : DegreePartition b =>
      (DayTensor.map (Hom.id (bang 1))
        (bangComultComponent 1
          (degreePartitionToPair b part).1
          (degreePartitionToPair b part).2)).app n
        ((bangComultComponent 1 a b).app n x))
      ((DayTensor.map (Hom.id (bang 1)) bangComult_one).app n
        ((bangComultComponent 1 a b).app n x)) := by
set ? : Superoperator n
  (tensorPowerDimension 1 a * tensorPowerDimension 1 b) :=
  (bangSplitComponent 1 a b).app n x
set gen := (DayCoend.intro (bang 1) (bang 1)).app
  (bangDegreeUnit 1 a) (bangDegreeUnit 1 b)
have hx := bangComultComponent_eq_act 1 a b n x
have h?ub := bangComult_degreeUnit_partition_hasSum b
have hintro :=
  (DayCoend.intro (bang 1) (dayTensor (bang 1) (bang 1))).map_sum_right
    (bangDegreeUnit 1 a) h?ub
have hact :=
  (dayTensor (bang 1) (dayTensor (bang 1) (bang 1))).act_sum_element ? hintro

```

```

have hfam :
  (fun part : DegreePartition b =>
    (dayTensor (bang 1) (dayTensor (bang 1) (bang 1))).act
    ((DayCoend.intro (bang 1) (dayTensor (bang 1) (bang 1))).app
      (bangDegreeUnit 1 a)
      ((bangComultComponent 1
        (degreePartitionToPair b part).1
        (degreePartitionToPair b part).2).app
        (tensorPowerDimension 1 b) (bangDegreeUnit 1 b)))) ?) =
  fun part : DegreePartition b =>
    (DayTensor.map (Hom.id (bang 1))
      (bangComultComponent 1
        (degreePartitionToPair b part).1
        (degreePartitionToPair b part).2)).app n
    ((bangComultComponent 1 a b).app n x) := by
  funext part
  rw [hx]; symm
  rw [(DayTensor.map (Hom.id (bang 1))
    (bangComultComponent 1
      (degreePartitionToPair b part).1
      (degreePartitionToPair b part).2)).naturality gen ?,
    DayTensor.map_intro, Hom.id_app]
have hsum :
  (DayTensor.map (Hom.id (bang 1)) bangComult_one).app n
  ((bangComultComponent 1 a b).app n x) =
  (dayTensor (bang 1) (dayTensor (bang 1) (bang 1))).act
  ((DayCoend.intro (bang 1) (dayTensor (bang 1) (bang 1))).app
    (bangDegreeUnit 1 a)
    (bangComult_one.app (tensorPowerDimension 1 b) (bangDegreeUnit 1 b))) ? :=
  by
  rw [hx, (DayTensor.map (Hom.id (bang 1)) bangComult_one).naturality gen ?,
    DayTensor.map_intro, Hom.id_app]
  rw [hfam] at hact
  rwa [← hsum] at hact

```

#### 4.4.456 Definition of the left coassociativity index equivalence

**Definition.** The left coassociativity index equivalence is an element of  $\Sigma \text{ ab} \simeq \mathbb{N} \times \mathbb{N} \times \mathbb{N}$ .

**Construction.** Constructed by supplying each component: left inverse and right inverse. The accompanying laws are verified from the definitions.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCoassoc.lean`

```

def leftCoassocIndexEquiv :
  (Sigma ab : Nat x Nat, DegreePartition ab.1) ? Nat x Nat x Nat where
toFun s :=
  ((degreePartitionToPair s.1.1 s.2).1,
    (degreePartitionToPair s.1.1 s.2).2, s.1.2)
invFun pqr :=
  <(pqr.1 + pqr.2.1, pqr.2.2), (pairToDegreePartition (pqr.1, pqr.2.1)).2>
left_inv := by
  intro s
  rcases s with <<a, b>, part>
  have hr := degreePartitionEquiv.right_inv <a, part>

```

```

-- hr : pairToDegreePartition (toPair a part) = <a, part>
refine Eq.trans ?_ (congrArg (fun sigma : (t : Nat) x DegreePartition t =>
  (<(sigma.1, b), sigma.2> : (Sigma ab : Nat x Nat, DegreePartition ab.1))) hr)
-- LHS after toFun comp invFun vs <((p+q),b), part'> where part' = pair....2
-- and middle is <(a,b), part> from hr
-- Need: invFun(toFun s) = <(p+q, b), pair(toPair).2> equal to
--      <((pair toPair).1, b), (pair toPair).2>
apply Sigma.ext
* apply Prod.ext
  * -- p+q = (pairToDegreePartition (p,q)).1
    rfl
  * rfl
* rfl
right_inv := by
  intro pqr
  rcases pqr with <p, q, r>
  have h1 := pairToDegreePartition_toPair (p, q)
  exact congrArg (fun pq : Nat x Nat => (pq.1, pq.2, r)) h1

```

#### 4.4.457 Definition of the right coassociativity index equivalence

**Definition.** The right coassociativity index equivalence is an element of  $\Sigma \text{ ab} \simeq \mathbb{N} \times \mathbb{N} \times \mathbb{N}$ .

**Construction.** Constructed by supplying each component: left inverse and right inverse. The accompanying laws are verified from the definitions.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCoassoc.lean`

```

def rightCoassocIndexEquiv :
  (Sigma ab : Nat x Nat, DegreePartition ab.2) ? Nat x Nat x Nat where
toFun s :=
  (s.1.1, (degreePartitionToPair s.1.2 s.2).1,
    (degreePartitionToPair s.1.2 s.2).2)
invFun pqr :=
  <(pqr.1, pqr.2.1 + pqr.2.2), (pairToDegreePartition (pqr.2.1, pqr.2.2)).2>
left_inv := by
  intro s
  rcases s with <<a, b>, part>
  have hr := degreePartitionEquiv.right_inv <b, part>
  refine Eq.trans ?_ (congrArg (fun sigma : (t : Nat) x DegreePartition t =>
    (<(a, sigma.1), sigma.2> : (Sigma ab : Nat x Nat, DegreePartition ab.2))) hr)
  apply Sigma.ext
  * apply Prod.ext <;> rfl
  * rfl
right_inv := by
  intro pqr
  rcases pqr with <p, q, r>
  have h1 := pairToDegreePartition_toPair (q, r)
  exact congrArg (fun qr : Nat x Nat => (p, qr.1, qr.2)) h1

```

#### 4.4.458 Pointwise formula for the left coassociativity index equivalence of the symmetry

**Statement.** For natural numbers  $p, q, r$ : the symmetry of  $p, q, r$  equals  $\langle (p + q, r), (\text{pairToDegreePartition } (p, q)).2 \rangle$ .

**Proof.** By definition: the left-hand side, the symmetry of  $p, q, r$ , and the right-hand side,  $\langle (p + q, r), (\text{pairToDegreePartition } (p, q)).2 \rangle$ , unfold to the same term.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidCoassoc.lean](#)

```
theorem leftCoassocIndexEquiv_symm_apply (p q r : Nat) :
  leftCoassocIndexEquiv.symm (p, q, r) =
    <(p + q, r), (pairToDegreePartition (p, q)).2> :=
  rfl
```

#### 4.4.459 Pointwise formula for the right coassociativity index equivalence of the symmetry

**Statement.** For natural numbers  $p, q, r$ : the symmetry of  $p, q, r$  equals  $\langle (p, q + r), (\text{pairToDegreePartition } (q, r)).2 \rangle$ .

**Proof.** By definition: the left-hand side, the symmetry of  $p, q, r$ , and the right-hand side,  $\langle (p, q + r), (\text{pairToDegreePartition } (q, r)).2 \rangle$ , unfold to the same term.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidCoassoc.lean](#)

```
theorem rightCoassocIndexEquiv_symm_apply (p q r : Nat) :
  rightCoassocIndexEquiv.symm (p, q, r) =
    <(p, q + r), (pairToDegreePartition (q, r)).2> :=
  rfl
```

#### 4.4.460 Degree partition to pair of the pair to degree partition

**Statement.** For natural numbers  $p, q$ : the degree partition to pair of the sum of  $p$  and  $q$  and  $(\text{pairToDegreePartition } (p, q)).2$  equals  $p, q$ .

**Proof.** The claim follows directly from the definitions of the objects involved.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidCoassoc.lean](#)

```
theorem degreePartitionToPair_pairToDegreePartition (p q : Nat) :
  degreePartitionToPair (p + q) (pairToDegreePartition (p, q)).2 = (p, q) := by
  have h := pairToDegreePartition_toPair (p, q)
  -- h : toPair (pair (p,q)).1 (pair (p,q)).2 = (p,q)
  -- (pair (p,q)).1 = p+q definitionally
  exact h
```

#### 4.4.461 Coassociativity of the exponential modality, at one

**Statement.** The composite of the associator of  $\text{bang } 1, \text{bang } 1, \text{bang } 1$  after the composite of  $\text{Day Tensor.map bangComult\_one } (\text{Hom.id } (\text{bang } 1))$  after  $\text{bangComult\_one}$  equals the composite of the functorial action of  $\text{Hom.id } (\text{bang } 1)$  and  $\text{bangComult\_one}$  after the exponential co-multiplication one.

**Proof.** By case analysis on  $pqr$ . The key step rewrites with the pointwise formula for the composition, the pointwise formula for the left coassociativity index equivalence of the symmetry, the degree partition to pair of the pair to degree partition and the pointwise formula for the right coassociativity index equivalence of the symmetry.

## Lean 4 source QLambda/Domain/Presheaf/DayComonoidCoassoc.lean

```

theorem bang_coassociative_one :
  Hom.comp (DayTensor.associator (bang 1) (bang 1) (bang 1))
    (Hom.comp (DayTensor.map bangComult_one (Hom.id (bang 1)))
      bangComult_one) =
  Hom.comp (DayTensor.map (Hom.id (bang 1)) bangComult_one)
    bangComult_one := by
ext n x
let Assoc := DayTensor.associator (bang 1) (bang 1) (bang 1)
let M3 := dayTensor (bang 1) (dayTensor (bang 1) (bang 1))
have h? := bangComult_hasSum_components n x
have hmapL := (DayTensor.map bangComult_one (Hom.id (bang 1))).map_sum h?
have hAssocL := Assoc.map_sum hmapL
have hmapR := (DayTensor.map (Hom.id (bang 1)) bangComult_one).map_sum h?
have hinnerL (a b : Nat) :=
  Assoc.map_sum (bang_map_comult_id_partition_hasSum a b n x)
let flatL : (Sigma ab : Nat x Nat, DegreePartition ab.1) -> (M3.obj n).Carrier
:=
  fun s =>
    Assoc.app n
      ((DayTensor.map
        (bangComultComponent 1
          (degreePartitionToPair s.1.1 s.2).1
          (degreePartitionToPair s.1.1 s.2).2)
        (Hom.id (bang 1))).app n
        ((bangComultComponent 1 s.1.1 s.1.2).app n x))
have hflatL : (M3.obj n).HasSum flatL
  (Assoc.app n
    ((DayTensor.map bangComult_one (Hom.id (bang 1))).app n
      (bangComult_one.app n x))) := by
refine (M3.obj n).summation.flatten
  (fun (ab : Nat x Nat) (part : DegreePartition ab.1) =>
    Assoc.app n
      ((DayTensor.map
        (bangComultComponent 1
          (degreePartitionToPair ab.1 part).1
          (degreePartitionToPair ab.1 part).2)
        (Hom.id (bang 1))).app n
        ((bangComultComponent 1 ab.1 ab.2).app n x)))
  _ |>.mpr <?_, ?_, ?_>
* exact fun ab =>
  Assoc.app n
    ((DayTensor.map bangComult_one (Hom.id (bang 1))).app n
      (bangComultComponentFamily 1 n x ab))
* intro ab; exact hinnerL ab.1 ab.2
* exact hAssocL
let flatR : (Sigma ab : Nat x Nat, DegreePartition ab.2) -> (M3.obj n).Carrier
:=
  fun s =>
    (DayTensor.map (Hom.id (bang 1))
      (bangComultComponent 1
        (degreePartitionToPair s.1.2 s.2).1
        (degreePartitionToPair s.1.2 s.2).2)).app n
      ((bangComultComponent 1 s.1.1 s.1.2).app n x)
have hinnerR (a b : Nat) := bang_map_id_comult_partition_hasSum a b n x

```



```

have hflatR : (M3.obj n).HasSum flatR
  ((DayTensor.map (Hom.id (bang 1)) bangComult_one).app n
    (bangComult_one.app n x)) := by
  refine (M3.obj n).summation.flatten
    (fun (ab : Nat x Nat) (part : DegreePartition ab.2) =>
      (DayTensor.map (Hom.id (bang 1))
        (bangComultComponent 1
          (degreePartitionToPair ab.2 part).1
          (degreePartitionToPair ab.2 part).2)).app n
        ((bangComultComponent 1 ab.1 ab.2).app n x))
    _ |>.mpr <?_, ?_, ?_>
* exact fun ab =>
  (DayTensor.map (Hom.id (bang 1)) bangComult_one).app n
  (bangComultComponentFamily 1 n x ab)
* intro ab; exact hinnerR ab.1 ab.2
* exact hmapR
have hL_comp :
  (M3.obj n).HasSum (flatL comp leftCoassocIndexEquiv.symm)
  (Assoc.app n
    ((DayTensor.map bangComult_one (Hom.id (bang 1))).app n
      (bangComult_one.app n x))) :=
  ((M3.obj n).summation.reindex leftCoassocIndexEquiv.symm flatL _).mpr hflatL
have hL :
  (M3.obj n).HasSum
    (fun pqr : Nat x Nat x Nat =>
      Assoc.app n
        ((DayTensor.map (bangComultComponent 1 pqr.1 pqr.2.1)
          (Hom.id (bang 1))).app n
          ((bangComultComponent 1 (pqr.1 + pqr.2.1) pqr.2.2).app n x)))
    (Assoc.app n
      ((DayTensor.map bangComult_one (Hom.id (bang 1))).app n
        (bangComult_one.app n x)))) := by
  convert hL_comp using 1
  funext pqr
  rcases pqr with <p, q, r>
  rw [Function.comp_apply, leftCoassocIndexEquiv_symm_apply]
  dsimp only [flatL]
  rw [degreePartitionToPair_pairToDegreePartition]
have hR_comp :
  (M3.obj n).HasSum (flatR comp rightCoassocIndexEquiv.symm)
  ((DayTensor.map (Hom.id (bang 1)) bangComult_one).app n
    (bangComult_one.app n x)) :=
  ((M3.obj n).summation.reindex rightCoassocIndexEquiv.symm flatR _).mpr hflatR
have hR :
  (M3.obj n).HasSum
    (fun pqr : Nat x Nat x Nat =>
      (DayTensor.map (Hom.id (bang 1))
        (bangComultComponent 1 pqr.2.1 pqr.2.2)).app n
        ((bangComultComponent 1 pqr.1 (pqr.2.1 + pqr.2.2)).app n x))
      ((DayTensor.map (Hom.id (bang 1)) bangComult_one).app n
        (bangComult_one.app n x))) := by
  convert hR_comp using 1
  funext pqr
  rcases pqr with <p, q, r>
  rw [Function.comp_apply, rightCoassocIndexEquiv_symm_apply]
  dsimp only [flatR]

```

```

rw [degreePartitionToPair_pairToDegreePartition]
have heq :
  (fun pqr : Nat x Nat x Nat =>
    Assoc.app n
      ((DayTensor.map (bangComultComponent 1 pqr.1 pqr.2.1)
        (Hom.id (bang 1))).app n
        ((bangComultComponent 1 (pqr.1 + pqr.2.1) pqr.2.2).app n x))) =
  fun pqr : Nat x Nat x Nat =>
    (DayTensor.map (Hom.id (bang 1))
      (bangComultComponent 1 pqr.2.1 pqr.2.2)).app n
      ((bangComultComponent 1 pqr.1 (pqr.2.1 + pqr.2.2)).app n x) := by
  funext pqr
  exact bangComultComponent_coassoc_one pqr.1 pqr.2.1 pqr.2.2 n x
rw [heq] at hL
exact (M3.obj n).summation.unique hL hR

```

#### 4.4.462 Coassociativity of the exponential modality, when it is at most one

**Statement.** For a natural number  $A$ : if  $A \leq 1$ , then an explicit expression in the composition, the associator, the exponential modality and the functorial action equals the composite of the functorial action of `Hom.id (bang A)` and `bangComult_of_le_one A hA` after the exponential comultiplication of order one of  $A$  and  $hA$ .

**Proof.** The goal is closed by simplification with the defining equations.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCoassoc.lean`

```

theorem bang_coassociative_of_le_one (A : Nat) (hA : A <= 1) :
  Hom.comp (DayTensor.associator (bang A) (bang A) (bang A))
    (Hom.comp (DayTensor.map (bangComult_of_le_one A hA) (Hom.id (bang A)))
      (bangComult_of_le_one A hA)) =
  Hom.comp (DayTensor.map (Hom.id (bang A)) (bangComult_of_le_one A hA))
    (bangComult_of_le_one A hA) := by
  interval_cases A
  * -- Reduce to bang_coassociative_zero via bangComult_zero_eq
    have h0 : bangComult_of_le_one 0 (by decide) = bangComult_zero := rfl
    simpa [h0] using bang_coassociative_zero
  * have h1 : bangComult_of_le_one 1 (by decide) = bangComult_one := rfl
    simpa [h1] using bang_coassociative_one

```

#### 4.4.463 Day comonoid structure on exponential modality of $A$ for $A \leq 1$

**Definition.** Day comonoid structure on `bang A` for  $A \leq 1$ . Marked abbrev so `(bangComonoid A hA).carrier` reduces to `bang A`.

**Construction.** Constructed by supplying each component: carrier, counit, comultiplication, left counit, right counit, coassociativity and cocommutativity. The accompanying laws are verified from the definitions.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCoassoc.lean`

```

noncomputable abbrev bangComonoid (A : Nat) (hA : A <= 1) : Comonoid where
  carrier := bang A
  counit := bangCounit A
  comult := bangComult_of_le_one A hA

```

```

left_counit := bang_left_counit_of_le_one A hA
right_counit := bang_right_counit_of_le_one A hA
coassociative := bang_coassociative_of_le_one A hA
cocommutative := bang_cocommutative_of_le_one A hA

```

#### 4.4.464 Definition of the exponential cofree forget

**Definition.** The exponential cofree forget of  $A$ ,  $C$  and  $f$  is a module morphism from  $C$  to representable  $A$ .

**Construction.** Defined to be the composite of the dereliction of  $A$  after  $f$ .

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidCofree.lean](#)

```

noncomputable def bangCofreeForget (A : Nat) (C : Module)
  (f : Hom C (bang A)) : Hom C (representable A) :=
  Hom.comp (bangDereliction A) f

/-! ## Cofree UP for `A <= 1` (forgetful direction) -/

```

#### 4.4.465 Forgetful map from comonoid homs into exponential comonoid to module homs into the representable

**Definition.** Forgetful map from comonoid homs into  $\text{bangComonoid}$  to module homs into the representable.

**Construction.** Defined to be the exponential cofree forget of  $A$ , the carrier of  $C$ , the morphism of  $f$ .

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidCofree.lean](#)

```

noncomputable def bangCofreeForgetComonoid (A : Nat) (hA : A <= 1)
  (C : Comonoid)
  (f : ComonoidHom C (bangComonoid A hA)) :
  Hom C.carrier (representable A) :=
  bangCofreeForget A C.carrier f.hom

/-! ## Cofree UP for `A = 0`

The forgetful map `bangCofreeForgetComonoid` has an inverse for `A = 0`:
every comonoid admits a unique comonoid morphism into `bangComonoid 0`,
given by promoting the counit along `representableToBang 0 0`. Hom-sets into
`representable 0` are fiberwise unique, so the cofree equivalence is a
propositional equivalence of singletons.
-/

```

#### 4.4.466 There is only one CP map into the zero-dimensional output

**Statement.** There is only one CP map into the zero-dimensional output. Formally:  $\text{Subsingleton } (\text{CP Map } n \ 0)$ .

**Proof.** The claim follows from the definitions of the objects involved.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
theorem cpMap_to_zero_subsingleton (n : Nat) :
  Subsingleton (CPMap n 0) where
  allEq _? _? := by
    apply CPMap.ext
  ext i
  exact Fin.elim0 i.1
```

#### 4.4.467 Consequently every superoperator into dimension zero is the zero map

**Statement.** Consequently every superoperator into dimension zero is the zero map. Formally: `Subsingleton (Superoperator n 0)`.

**Proof.** The claim follows from the definitions of the objects involved.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
theorem superoperator_to_zero_subsingleton (n : Nat) :
  Subsingleton (Superoperator n 0) where
  allEq _? _? :=
    Superoperator.ext ((cpMap_to_zero_subsingleton n).allEq _ _)
```

#### 4.4.468 Every fiber of the zero-dimensional representable is a singleton

**Statement.** Every fiber of the zero-dimensional representable is a singleton. Formally: `Subsingleton (((representable 0).obj n).Carrier)`.

**Proof.** This is an instance of the fact that consequently every superoperator into dimension zero is the zero map.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
theorem representableZero_subsingleton (n : Nat) :
  Subsingleton (((representable 0).obj n).Carrier) :=
  superoperator_to_zero_subsingleton n
```

#### 4.4.469 The morphism to representable module zero uniqueness

**Statement.** For a superoperator module  $M$ , module morphisms  $f, g: f = g$ .

**Proof.** Both sides are compared pointwise (by extensionality). It follows from the fact that every fiber of the zero-dimensional representable is a singleton.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
theorem hom_to_representable_zero_unique (M : Module)
  (f g : Hom M (representable 0)) : f = g := by
  ext n x
  exact (representableZero_subsingleton n).allEq _ _
```

#### 4.4.470 The comonoid functorial action counit identity comultiplication

**Statement.** For a comonoid  $C$ : the composite of the functorial action of  $C.counit$  and  $Hom.id\ C.carrier$  after the comultiplication of  $C$  equals the inverse left unitor of the carrier of  $C$ .

**Proof.** Both sides are compared pointwise (by extensionality). It follows from the transitivity for semantic equalities of circuits.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
theorem comonoid_map_counit_id_comult (C : Comonoid) :
  Hom.comp (DayTensor.map C.counit (Hom.id C.carrier)) C.comult =
    DayTensor.leftUnitorInv C.carrier := by
  have hinv := (DayTensor.leftUnitorIso C.carrier).inv_hom
  have h := C.left_counit
  refine Eq.trans ?_ (Eq.trans (congrArg
    (fun g => Hom.comp (DayTensor.leftUnitorInv C.carrier) g) h)
    (Hom.comp_id _))
  refine Eq.trans (Eq.symm (Hom.id_comp _)) ?_
  refine Eq.trans (congrArg (fun g => Hom.comp g
    (Hom.comp (DayTensor.map C.counit (Hom.id C.carrier)) C.comult))
    hinv.symm) ?_
  ext n x; rfl
```

#### 4.4.471 Comonoid of the counit of a tensor product

**Statement.** Any Day comonoid satisfies  $(\varepsilon \otimes \varepsilon) \circ \Delta = \lambda_{I^{-1}} \circ \varepsilon$ .

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the fact that the identity is a left unit for composition for module morphisms, the fact that the identity is a right unit for composition for module morphisms, the comonoid functorial action counit identity comultiplication and the naturality of the inverse left unitor.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
theorem comonoid_counit_tensor (C : Comonoid) :
  Hom.comp (DayTensor.map C.counit C.counit) C.comult =
    Hom.comp (DayTensor.leftUnitorInv dayTensorUnit) C.counit := by
  have hfactor :
    DayTensor.map C.counit C.counit =
      Hom.comp (DayTensor.map (Hom.id dayTensorUnit) C.counit)
        (DayTensor.map C.counit (Hom.id C.carrier)) := by
  have h :=
    DayTensor.map_comp (Hom.id dayTensorUnit) C.counit
      C.counit (Hom.id C.carrier)
  simp only [Hom.id_comp, Hom.comp_id] at h
  exact h
  refine Eq.trans (congrArg (fun g => Hom.comp g C.comult) hfactor) ?_
  refine Eq.trans (by ext; rfl :
    Hom.comp
      (Hom.comp (DayTensor.map (Hom.id dayTensorUnit) C.counit)
        (DayTensor.map C.counit (Hom.id C.carrier)))
      C.comult =
      Hom.comp (DayTensor.map (Hom.id dayTensorUnit) C.counit)
        (Hom.comp (DayTensor.map C.counit (Hom.id C.carrier)))
```

```

      C.comult)) ?_
rw [comonoid_map_counit_id_comult C, leftUnitorInv_natural C.counit]

```

#### 4.4.472 Count of the exponential of a composite of the representable to exponential of zero

**Statement.** The composite of the counit of the exponential at 0 after the representable to exponential at 0, 0 equals the identity of the Day tensor unit.

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the for  $A \leq 1$ , symmetric averaging coincides with the identity channel and the identity of a composite for superoperators.

##### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

theorem bangCounit_comp_representableToBang_zero :
  Hom.comp (bangCounit 0) (representableToBang 0 0) =
    Hom.id dayTensorUnit := by
  ext n ?
  change ((representableToBang 0 0).app n ? 0).val = ?
  change ((symmetricPowerProjection 0 0).app n ?).val = ?
  show Superoperator.comp (symmetricAverage 0 0)
    (? : Superoperator n (tensorPowerDimension 0 0)) = ?
  rw [symmetricAverage_of_le_one 0 0 (by decide)]
  exact Superoperator.identity_comp _

```

#### 4.4.473 Symmetric tensor of zero, assuming positivity of the subsingleton

**Statement.** For natural numbers  $k, n$ : if  $k \neq 0$ , then `SymmetricElement 0 k n` has at most one element.

**Proof.** The claim follows from the definitions of the objects involved.

##### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

theorem symmetricElement_zero_of_pos_subsingleton (k n : Nat) (hk : k != 0) :
  Subsingleton (SymmetricElement 0 k n) where
  allEq x y := by
    apply SymmetricElement.ext
    have hdim : tensorPowerDimension 0 k = 0 := by
      cases k with
      | zero => exact (hk rfl).elim
      | succ k => simp [tensorPowerDimension]
    have : Subsingleton (Superoperator n (tensorPowerDimension 0 k)) := by
      rw [hdim]; exact superoperator_to_zero_subsingleton n
    exact Subsingleton.elim _ _

```

#### 4.4.474 The exponential modality of zero respects counit

**Statement.** For a natural number  $n$ : `(representableToBang 0 0).app n ((bangCounit 0).app n x) = x`.

**Proof.** Both sides are compared pointwise (by extensionality). The argument splits on the relevant condition. An equation between variables is used to substitute one for the other. The key step rewrites with

the for  $A \leq 1$ , symmetric averaging coincides with the identity channel, the extensionality for symmetric tensors, the identity of a composite for superoperators and the symmetric tensor of zero, assuming positivity of the subsingleton.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
theorem bang_zero_eq_of_counit (n : Nat)
  (x : ((bang 0).obj n).Carrier) :
  (representableToBang 0 0).app n ((bangCounit 0).app n x) = x := by
  funext k
  by_cases hk : k = 0
  * subst hk
    apply SymmetricElement.ext
    change Superoperator.comp (symmetricAverage 0 0) (x 0).val = (x 0).val
    rw [symmetricAverage_of_le_one 0 0 (by decide)]
    exact Superoperator.identity_comp _
  * exact (symmetricElement_zero_of_pos_subsingleton k n hk).allEq _ _
```

#### 4.4.475 Representable to exponential of a composite of the counit of the exponential of zero

**Statement.** The composite of the representable to exponential at 0, 0 after the counit of the exponential at 0 equals the identity of the exponential modality at 0.

**Proof.** Both sides are compared pointwise (by extensionality). It follows from the fact that the exponential modality of zero respects counit.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
theorem representableToBang_comp_bangCounit_zero :
  Hom.comp (representableToBang 0 0) (bangCounit 0) =
  Hom.id (bang 0) := by
  ext n x; exact bang_zero_eq_of_counit n x
```

#### 4.4.476 Exponential split of the representable to exponential of zero

**Statement.** For a natural number  $n$ :  $(\text{bangSplitComponent } 0 \ 0 \ 0).app \ n \ ((\text{representableToBang } 0 \ 0).app \ n \ \Phi)$  equals an explicit expression in the superoperator and the dimension of a tensor power.

**Proof.** The key step rewrites with the components of the composition, the reflexivity of the map induced by an index equivalence, the definition of the exponential split component and the definition of the representable to exponential.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
theorem bangSplit_representableToBang_zero (n : Nat)
  (? : ((representable (tensorPowerDimension 0 0)).obj n).Carrier) :
  (bangSplitComponent 0 0 0).app n
  ((representableToBang 0 0).app n ?) =
  (? : Superoperator n
    (tensorPowerDimension 0 0 * tensorPowerDimension 0 0)) := by
  unfold bangSplitComponent representableToBang
  simp only [Hom.comp_app]
```

```

change Superoperator.comp
  (Superoperator.ofEquivalence (tensorSplitEquiv 0 0 0))
  ((countableProductInjection (fun j => symmetricPower 0 j) 0).app n
    ((symmetricPowerProjection 0 0).app n ?) 0).val = _
change Superoperator.comp
  (Superoperator.ofEquivalence (tensorSplitEquiv 0 0 0))
  ((symmetricPowerProjection 0 0).app n ?).val = _
change Superoperator.comp
  (Superoperator.ofEquivalence (tensorSplitEquiv 0 0 0))
  (Superoperator.comp (symmetricAverage 0 0)
    (? : Superoperator n (tensorPowerDimension 0 0))) = _
have havg := symmetricAverage_of_le_one 0 0 (Nat.zero_le 1)
rw [havg]
have h? :
  Superoperator.comp
    (Superoperator.identity (tensorPowerDimension 0 0))
    (? : Superoperator n (tensorPowerDimension 0 0)) =
    (? : Superoperator n (tensorPowerDimension 0 0)) :=
  Superoperator.identity_comp _
rw [h?]
have hsplit :
  Superoperator.ofEquivalence (tensorSplitEquiv 0 0 0) =
  Superoperator.ofEquivalence
    (Equiv.refl
      (Fin (tensorPowerDimension 0 0 * tensorPowerDimension 0 0))) :=
  ofEquivalence_dim_one rfl rfl _ _
rw [hsplit, Superoperator.ofEquivalence_refl]
exact Superoperator.identity_comp _

```

#### 4.4.477 The exponential split to representable Day equals an inverse left unitor

**Statement.** For a natural number  $n$ :  $(\text{bangSplitToRepDay } 0 \ 0 \ 0).app \ n \ \Phi$  equals an explicit expression in the inverse left unitor and the Day tensor unit.

**Proof.** The key step rewrites with the fact that unfolding of exponential split to representable Day on a representable element, the naturality of the inverse tensor left unitor, the inverse tensor left unitor of one and the identity of a composite for superoperators.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

theorem bangSplitToRepDay_eq_leftUnitorInv (n : Nat)
  (? : ((representable
    (tensorPowerDimension 0 0 * tensorPowerDimension 0 0)).obj n).Carrier) :
  (bangSplitToRepDay 0 0 0).app n ? =
  (DayTensor.leftUnitorInv dayTensorUnit).app n
  (? : (dayTensorUnit.obj n).Carrier) := by
  rw [bangSplitToRepDay_app]
  set ?1 : Superoperator n 1 := ?
  set id1 : (dayTensorUnit.obj 1).Carrier := Superoperator.identity 1
  have hnats :=
    (DayCoend.intro dayTensorUnit dayTensorUnit).naturality
    id1 id1 (Superoperator.identity 1) ?1
  have hid : dayTensorUnit.act id1 (Superoperator.identity 1) = id1 :=
    dayTensorUnit.act_id id1
  have h?act : dayTensorUnit.act id1 ?1 = ?1 := by

```



```

change Superoperator.comp (idl : Superoperator 1 1) ?1 = ?1
exact Superoperator.identity_comp ?1
have hnats' :
  (DayCoend.intro dayTensorUnit dayTensorUnit).app idl ?1 =
    (dayTensor dayTensorUnit dayTensorUnit).act
      ((DayCoend.intro dayTensorUnit dayTensorUnit).app idl idl)
        (Superoperator.tensor (Superoperator.identity 1) ?1) := by
  rw [hid, h?act] at hnats'; exact hnats'
have hcomp :
  Superoperator.comp
    (Superoperator.tensor (Superoperator.identity 1) ?1)
    (Superoperator.tensorLeftUnitorInv n) =
    ?1 := by
  rw [Superoperator.tensorLeftUnitorInv_naturality ?1,
    tensorLeftUnitorInv_one]
  exact Superoperator.identity_comp ?1
have hEq :
  (dayTensor dayTensorUnit dayTensorUnit).act
    ((DayCoend.intro dayTensorUnit dayTensorUnit).app idl ?1)
    (Superoperator.tensorLeftUnitorInv n) =
    (dayTensor dayTensorUnit dayTensorUnit).act
      ((DayCoend.intro dayTensorUnit dayTensorUnit).app idl idl) ?1 := by
  rw [hnats', (dayTensor dayTensorUnit dayTensorUnit).act_comp, hcomp]
change
  (dayTensor
    (representable (tensorPowerDimension 0 0))
    (representable (tensorPowerDimension 0 0))).act
    ((DayCoend.intro
      (representable (tensorPowerDimension 0 0))
      (representable (tensorPowerDimension 0 0))).app
      (Superoperator.identity (tensorPowerDimension 0 0))
      (Superoperator.identity (tensorPowerDimension 0 0)))
    ? =
  (DayTensor.leftUnitorInv dayTensorUnit).app n
  (?1 : (dayTensorUnit.obj n).Carrier)
change _ =
  (dayTensor dayTensorUnit dayTensorUnit).act
    ((DayCoend.intro dayTensorUnit dayTensorUnit).app idl ?1)
    (Superoperator.tensorLeftUnitorInv n)
  rw [hEq]; rfl

```

#### 4.4.478 Typed left-unitor inverse at the Mid fiber dimension of a tensor power of 0 and 0

**Definition.** Typed left-unitor inverse at the Mid fiber `tensorPowerDimension 0 0`.

**Construction.** Defined to be the inverse left unitor of the Day tensor unit.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidCofree.lean](#)

```

noncomputable abbrev leftUnitorInv0 :
  Hom dayTensorUnit
    (dayTensor (representable (tensorPowerDimension 0 0))
      (representable (tensorPowerDimension 0 0))) :=
  DayTensor.leftUnitorInv dayTensorUnit

```

#### 4.4.479 Comultiplication of the exponential of zero of a composite of the representable to exponential

**Statement.** The composite of the exponential comultiplication zero after the representable to exponential at 0, 0 equals the composite of the functorial action of `representableToBang 0 0` after the left unitor inverse 0.

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the extensionality for module morphisms and congruence of function application.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
theorem bangComult_zero_comp_representableToBang :
  Hom.comp bangComult_zero (representableToBang 0 0) =
    Hom.comp
      (DayTensor.map (representableToBang 0 0) (representableToBang 0 0))
      leftUnitorInv0 := by
  apply Hom.ext
  intro n ?
  have hL := bangComult_zero_eq_component n
    ((representableToBang 0 0).app n ?)
  have hs := bangSplit_representableToBang_zero n ?
  change
    bangComult_zero.app n ((representableToBang 0 0).app n ?) =
      (DayTensor.map (representableToBang 0 0)
        (representableToBang 0 0)).app n
        ((DayTensor.leftUnitorInv dayTensorUnit).app n ?)
  rw [hL]
  change
    (DayTensor.map (representableToBang 0 0)
      (representableToBang 0 0)).app n
      ((bangSplitToRepDay 0 0 0).app n
        ((bangSplitComponent 0 0 0).app n
          ((representableToBang 0 0).app n ?))) = _
  rw [hs]
  exact congrArg
    ((DayTensor.map (representableToBang 0 0)
      (representableToBang 0 0)).app n
      (bangSplitToRepDay_eq_leftUnitorInv n
        (? : Superoperator n
          (tensorPowerDimension 0 0 * tensorPowerDimension 0 0)))
```

#### 4.4.480 Cofree lift of the unique map into representable module of 0

**Definition.** Cofree lift of the unique map into representable 0.

**Construction.** Defined to be the composite of the representable to exponential at 0, 0 after the counit of C.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
noncomputable def bangCofreeLiftZero (C : Comonoid) :
  Hom C.carrier (bang 0) :=
  Hom.comp (representableToBang 0 0) C.counit
```

#### 4.4.481 The exponential cofree lift zero preserves the counit

**Statement.** For a comonoid  $C$ : the composite of the counit of the exponential at 0 after the exponential cofree lift zero of  $C$  equals the counit of  $C$ .

**Proof.** Both sides are compared pointwise (by extensionality). The goal is simplified using the components of the identity.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
theorem bangCofreeLiftZero_preserves_counit (C : Comonoid) :
  Hom.comp (bangCounit 0) (bangCofreeLiftZero C) = C.counit := by
  ext n x
  change (bangCounit 0).app n
    ((representableToBang 0 0).app n (C.counit.app n x)) =
    C.counit.app n x
  have h :=
    congrArg (fun (f : Hom dayTensorUnit dayTensorUnit) =>
      f.app n (C.counit.app n x))
      bangCounit_comp_representableToBang_zero
  change (bangCounit 0).app n
    ((representableToBang 0 0).app n (C.counit.app n x)) = _ at h
  simp [Hom.id_app] using h
```

#### 4.4.482 The exponential cofree lift zero preserves the comultiplication

**Statement.** For a comonoid  $C$ : the composite of the exponential comultiplication zero after the exponential cofree lift zero of  $C$  equals the composite of the functorial action of `bangCofreeLiftZero`  $C$  after the comultiplication of  $C$ .

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the transitivity for semantic equalities of circuits and the fact that observational equality is symmetric.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
theorem bangCofreeLiftZero_preserves_comult (C : Comonoid) :
  Hom.comp bangComult_zero (bangCofreeLiftZero C) =
  Hom.comp (DayTensor.map (bangCofreeLiftZero C) (bangCofreeLiftZero C))
    C.comult := by
  have hL :
    Hom.comp bangComult_zero (bangCofreeLiftZero C) =
    Hom.comp
      (DayTensor.map (representableToBang 0 0) (representableToBang 0 0))
      (Hom.comp leftUnitorInv0 C.counit) := by
  change Hom.comp bangComult_zero
    (Hom.comp (representableToBang 0 0) C.counit) = _
  refine Eq.trans (by ext; rfl :
    Hom.comp bangComult_zero
      (Hom.comp (representableToBang 0 0) C.counit) =
      Hom.comp
        (Hom.comp bangComult_zero (representableToBang 0 0)) C.counit) ?_
  refine Eq.trans (congrArg (fun g => Hom.comp g C.counit)
    bangComult_zero_comp_representableToBang) ?_
  ext; rfl
  have hCT :
```

```

Hom.comp leftUnitorInv0 C.counit =
  Hom.comp (DayTensor.map C.counit C.counit) C.comult := by
have h := comonoid_counit_tensor C
refine Eq.trans ?_ h.symm
rfl
have hR :
  Hom.comp (DayTensor.map (bangCofreeLiftZero C) (bangCofreeLiftZero C))
    C.comult =
  Hom.comp
    (DayTensor.map (representableToBang 0 0) (representableToBang 0 0))
    (Hom.comp (DayTensor.map C.counit C.counit) C.comult) := by
have hmap := DayTensor.map_comp (representableToBang 0 0) C.counit
  (representableToBang 0 0) C.counit
change Hom.comp
  (DayTensor.map
    (Hom.comp (representableToBang 0 0) C.counit)
    (Hom.comp (representableToBang 0 0) C.counit))
  C.comult = _
refine Eq.trans (congrArg (fun g => Hom.comp g C.comult) hmap) ?_
ext; rfl
rw [hL, hCT]; exact hR.symm

```

#### 4.4.483 Definition of the exponential cofree lift zero comonoid morphism

**Definition.** The exponential cofree lift zero comonoid morphism of  $C$  is a comonoid morphism from  $C$  to  $\text{bangComonoid } 0$  (by decide).

**Construction.** Constructed by supplying each component: morphism, preserves counit and preserves comultiplication. The accompanying laws are verified from the definitions.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

noncomputable def bangCofreeLiftZeroComonoidHom (C : Comonoid) :
  ComonoidHom C (bangComonoid 0 (by decide)) where
hom := bangCofreeLiftZero C
preserves_counit := bangCofreeLiftZero_preserves_counit C
preserves_comult := by
  change Hom.comp (bangComult_of_le_one 0 (by decide)) (bangCofreeLiftZero C) = _
  have h0 : bangComult_of_le_one 0 (by decide) = bangComult_zero := rfl
  rw [h0]
  exact bangCofreeLiftZero_preserves_comult C

```

#### 4.4.484 Uniqueness of the exponential cofree lift zero

**Statement.** For a comonoid  $C$ :  $f$  equals the exponential cofree lift zero comonoid morphism of  $C$ .

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the definition of the exponential comonoid, the components of the composition and the extensionality for comonoid morphisms.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

theorem bangCofreeLiftZero_unique (C : Comonoid)
  (f : ComonoidHom C (bangComonoid 0 (by decide))) :

```

```

f = bangCofreeLiftZeroComonoidHom C := by
apply ComonoidHom.ext
ext n x
have h? :
  (bangCounit 0).app n (f.hom.app n x) = C.counit.app n x := by
  have h := congrArg (fun g : Hom C.carrier dayTensorUnit => g.app n x)
    f.preserves_counit
  simp [bangComonoid, Hom.comp_app] using h
have hret := bang_zero_eq_of_counit n (f.hom.app n x)
-- f.hom x = repToBang (bangCounit (f.hom x)) = repToBang (C.counit x)
change f.hom.app n x = (representableToBang 0 0).app n (C.counit.app n x)
rw [ <- hret, h?]

```

#### 4.4.485 Cofree UP equivalence for $A = 0$

**Definition.** Cofree UP equivalence for  $A = 0$ .

**Construction.** Constructed by supplying each component of the structure explicitly.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidCofree.lean](#)

```

noncomputable def bangCofreeEquiv_zero (C : Comonoid) :
  Hom C.carrier (representable 0) ?
  ComonoidHom C (bangComonoid 0 (by decide)) where
toFun _ := bangCofreeLiftZeroComonoidHom C
invFun f := bangCofreeForgetComonoid 0 (by decide) C f
left_inv f := hom_to_representable_zero_unique _ _ _
right_inv f := (bangCofreeLiftZero_unique C f).symm

```

#### 4.4.486 Alias matching the gate-3 naming for the $A = 0$ case of the prospective comonoid morphism equivalence

**Definition.** Alias matching the gate-3 naming for the  $A = 0$  case of the prospective comonoidHom Equiv.

**Construction.** Defined to be the exponential cofree equivalence zero of C.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidCofree.lean](#)

```

noncomputable def comonoidHomEquiv_zero (C : Comonoid) :=
  bangCofreeEquiv_zero C

/ -! ## Cofree UP for `A = 1`

Homogeneous coefficients `phi_0 = ?`, `phi_n+_1 = fun comp (phi_n ? f) comp Delta
  `assemble by
`countableProductLift` into `bang 1`. The tensor-power law
`(phi_p ? phi_q) comp Delta = fun ^-1 comp phi_{p+q}` is proved by induction on `q`
  .
- /

```

#### 4.4.487 Day tensor elements are determined by all bilinear evaluations

**Statement.** Day tensor elements are determined by all bilinear evaluations. Formally:  $x = y$ .

**Proof.** This is an instance of the evaluation of itself for Day coends.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
theorem dayTensor_ext {M N : Module} {n : Nat}
  {x y : ((dayTensor M N).obj n).Carrier}
  (h : forall (L : Module) (b : Bilinear M N L),
    DayCoend.evaluate L b x = DayCoend.evaluate L b y) : x = y :=
  (DayCoend.evaluate_self x).symm.trans
    ((h (dayTensor M N) (DayCoend.intro M N)).trans (DayCoend.evaluate_self y))
```

#### 4.4.488 Transport map induced by an index equivalence of $\psi$ along $h : d = 1$

**Statement.** Transport ofEquivalence (finCongr h.symm)  $\circ \psi$  along  $h : d = 1$ . Formally: Superoperator.comp (Superoperator.ofEquivalence (finCongr hd.symm))  $\psi =$  hd.symm  $\triangleright \psi$ .

**Proof.** Both sides are compared pointwise (by extensionality). An equation between variables is used to substitute one for the other. The key step rewrites with the reflexivity of the map induced by an index equivalence, the identity of a composite for superoperators and the extensionality for bilinear maps.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
theorem ofEquiv_comp_eq_rec {n d : Nat} (hd : d = 1)
  (psi : Superoperator n 1) :
  Superoperator.comp
    (Superoperator.ofEquivalence (finCongr hd.symm))
    psi =
  hd.symm |> psi := by
  subst hd
  change Superoperator.comp
    (Superoperator.ofEquivalence (finCongr (Eq.symm rfl))) psi =
    (Eq.symm (rfl : (1:Nat)=1)) |> psi
  have he : finCongr (Eq.symm (rfl : (1:Nat)=1)) = Equiv.refl (Fin 1) := by
    apply Equiv.ext; intro; apply Fin.ext; rfl
  rw [he, Superoperator.ofEquivalence_refl, Superoperator.identity_comp]
```

#### 4.4.489 Map induced by an index equivalence of a composite of the trace-preserving

**Statement.** For natural numbers  $n, k$ , a superoperator  $\psi$ : the composite of the map induced by an index equivalence of finCongr (tensorPowerDimension\_one\_eq k).symm after  $\psi$  equals (tensorPowerDimension\_one\_eq k).symm  $\triangleright \psi$ .

**Proof.** This is an instance of the transport map induced by an index equivalence of  $\psi$  along  $h : d = 1$ .

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
theorem ofEquiv_comp_tpd {n k : Nat} (psi : Superoperator n 1) :
  Superoperator.comp
```

```

    (Superoperator.ofEquivalence
      (finCongr (tensorPowerDimension_one_eq k).symm))
    psi =
      (tensorPowerDimension_one_eq k).symm |> psi :=
ofEquiv_comp_eq_rec (tensorPowerDimension_one_eq k) psi

/-!
`PartialCountableSum` axioms (empty / singleton / remove_zero / reindex /
flatten) do not give free finite HasSum of arbitrary multi-term families:
flatten only regroups. `Fiber.hasSum_singleAt` covers one-supported families.
Thus the finite inner sum over `p+q=k` is not automatic for a general
`Module` fiber -- A >= 2 `BangDegreeUnitRectangleHasSum` remains blocked without
additional structure. The candidate `Module.act_sum_from_dim` (joint action
at fiber `A^k`) is unsound for representable/TNI modules when `d >= 2`;
`act_sum_tensor_from_one` and `CPMapSum.comp_from_dim` do not close the gap.
-/

```

#### 4.4.490 Precompose a bilinear map along a pair of module morphisms

**Definition.** Precompose a bilinear map along a pair of module morphisms.

**Construction.** Constructed by supplying each component: application, functorial action zero left, functorial action zero right, functorial action sum left, functorial action sum right and naturality. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidCofree.lean](#)

```

noncomputable def Bilinear.precomp
  {M M' N N' L : Module}
  (b : Bilinear M' N' L) (f : Hom M M') (g : Hom N N') :
  Bilinear M N L where
app := fun x y => b.app (f.app _ x) (g.app _ y)
map_zero_left := by
  intro m n y
  rw [f.map_zero, b.map_zero_left]
map_zero_right := by
  intro m n x
  rw [g.map_zero, b.map_zero_right]
map_sum_left := by
  intro ? _ m n xs s y h
  exact b.map_sum_left (g.app _ y) (f.map_sum h)
map_sum_right := by
  intro ? _ m n x ys s h
  exact b.map_sum_right (f.app _ x) (g.map_sum h)
naturality := by
  intro m' m n' n x y p q
  rw [f.naturality, g.naturality, b.naturality]

```

#### 4.4.491 Evaluation of a mapped family for Day tensor products

**Statement.** For superoperator modules  $M, M', N, N', L$ , module morphisms  $f, g$ , a natural number  $n$ : the evaluation of  $L, \beta, (\text{DayTensor.map } f \ g) . \text{app } n \ z$  equals the evaluation of  $L$ , the precomposition of  $\beta, f, g, z$ .

**Proof.** The key step rewrites with the components of the composition, the functorial action on an introduced element, the evaluation on an introduced element and the fact that extensionality for maps out of a Day tensor: it is enough to check coend generators.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidCofree.lean](#)

```
theorem DayTensor.evaluate_map {M M' N N' L : Module}
  (b : Bilinear M' N' L) (f : Hom M M') (g : Hom N N')
  {n : Nat} (z : ((DayTensor M N).obj n).Carrier) :
  DayCoend.evaluate L b ((DayTensor.map f g).app n z) =
  DayCoend.evaluate L (Bilinear.precomp b f g) z := by
have h :
  Hom.comp (DayCoend.lift b) (DayTensor.map f g) =
  DayCoend.lift (Bilinear.precomp b f g) := by
  apply DayTensor.hom_ext
  intro m k x y
  simp only [Hom.comp_app, DayTensor.map_intro]
  change DayCoend.evaluate L b
    ((DayCoend.intro M' N').app (f.app m x) (g.app k y)) =
    DayCoend.evaluate L (Bilinear.precomp b f g)
    ((DayCoend.intro M N).app x y)
  rw [DayCoend.evaluate_intro, DayCoend.evaluate_intro]
  rfl
exact congrArg (fun ? : Hom (DayTensor M N) L => ?.app n z) h
```

#### 4.4.492 Raw value of the summability of the bilinear for Day coends

**Statement.** For superoperator modules  $M, N, L$ , a natural number  $n$ : if for every  $m, k, x, y$ , the family  $\text{fun } i \Rightarrow (\beta s \ i).app \ x \ y$  sums to  $\gamma.app \ x \ y$ ;  $t$  is admissible; and  $t.Hereditary$ , then the family  $\text{fun } i \Rightarrow \text{DayCoend.Raw.value } t \ ht \ L \ (\beta s \ i)$  sums to  $\text{DayCoend.Raw.value } t \ ht \ L \ \gamma$ .

**Proof.** By induction on  $t$ . For zero and a generator, the claim is checked directly; for a sum, the claim follows from the induction hypothesis. The key step rewrites with the fact that the constantly-zero family has a sum over every countable index type and the uniqueness of the evaluation.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidCofree.lean](#)

```
theorem DayCoend.raw_value_hasSum_bilinear
  {M N L : Module} {n : Nat} {? : Type} [Countable ?]
  (bs : ? -> Bilinear M N L) (? : Bilinear M N L)
  (hpt : forall {m k : Nat} (x : (M.obj m).Carrier) (y : (N.obj k).Carrier),
    (L.obj (m * k)).HasSum (fun i => (bs i).app x y) (?.app x y))
  (t : DayCoend.Raw M N n) (ht : t.Admissible) (hh : t.Hereditary) :
  (L.obj n).HasSum
    (fun i => DayCoend.Raw.value t ht L (bs i))
    (DayCoend.Raw.value t ht L ?) := by
  induction t with
  | zero =>
    have h0 : DayCoend.Raw.value (.zero : DayCoend.Raw M N n) ht L ? = 0 :=
      (DayCoend.Raw.eval_unique _ ht L ? DayCoend.Raw.Eval.zero).symm
    have hi (i : ?) :
      DayCoend.Raw.value (.zero : DayCoend.Raw M N n) ht L (bs i) = 0 :=
      (DayCoend.Raw.eval_unique _ ht L (bs i) DayCoend.Raw.Eval.zero).symm
```



```

have hfun :
  (fun i => DayCoend.Raw.value (.zero : DayCoend.Raw M N n) ht L (bs i)) =
    fun _ => (0 : (L.obj n).Carrier) := funext hi
rw [h0, hfun]
exact Fiber.hasSum_zero (L.obj n)
| generator x y f =>
  have h? : DayCoend.Raw.value (.generator x y f) ht L ? =
    L.act (? .app x y) f :=
      (DayCoend.Raw.eval_unique _ ht L ? (DayCoend.Raw.Eval.generator x y f)).symm
  have hi (i : ?) :
    DayCoend.Raw.value (.generator x y f) ht L (bs i) =
      L.act ((bs i).app x y) f :=
        (DayCoend.Raw.eval_unique _ ht L (bs i)
          (DayCoend.Raw.Eval.generator x y f)).symm
  have hfun :
    (fun i => DayCoend.Raw.value (.generator x y f) ht L (bs i)) =
      fun i => L.act ((bs i).app x y) f := funext hi
  rw [h?, hfun]
  exact L.act_sum_element f (hpt x y)
| sum f ih =>
  have h?eval := DayCoend.Raw.eval_value (.sum f) ht L ?
  obtain <v?, hv?, hs?> := DayCoend.Raw.eval_sum_cases ? f h?eval
  have h?val : v? = fun j =>
    DayCoend.Raw.value (f j) (hh j).2 L ? := by
      funext j
      exact DayCoend.Raw.eval_unique (f j) (hh j).2 L ? (hv? j)
  have hsum? :
    (L.obj n).HasSum
      (fun j => DayCoend.Raw.value (f j) (hh j).2 L ?)
      (DayCoend.Raw.value (.sum f) ht L ?) := by
    rwa [h?val] at hs?
  have hrow (j : Nat) :
    (L.obj n).HasSum
      (fun i => DayCoend.Raw.value (f j) (hh j).2 L (bs i))
      (DayCoend.Raw.value (f j) (hh j).2 L ?) :=
    ih j (hh j).2 (hh j).1
  let phi : Nat -> ? -> (L.obj n).Carrier :=
    fun j i => DayCoend.Raw.value (f j) (hh j).2 L (bs i)
  have hflat :
    (L.obj n).HasSum
      (fun p : Sigma _ : Nat, ? => phi p.1 p.2)
      (DayCoend.Raw.value (.sum f) ht L ?) :=
    ((L.obj n).summation.flatten phi
      (DayCoend.Raw.value (.sum f) ht L ?)).mpr
    <fun j => DayCoend.Raw.value (f j) (hh j).2 L ?, hrow, hsum?>
  have hswap :
    (L.obj n).HasSum
      (fun p : Sigma _ : ?, Nat => phi p.2 p.1)
      (DayCoend.Raw.value (.sum f) ht L ?) :=
    ((L.obj n).summation.reindex (sigmaSwapEquiv ? Nat)
      (fun p : Sigma _ : Nat, ? => phi p.1 p.2)
      (DayCoend.Raw.value (.sum f) ht L ?)).mpr hflat
  obtain <g, hrows, hsumg> :=
    ((L.obj n).summation.flatten
      (fun i j => phi j i)
      (DayCoend.Raw.value (.sum f) ht L ?)).mp hswap

```

```

have hg : g = fun i => DayCoend.Raw.value (.sum f) ht L (bs i) := by
  funext i
  have he := DayCoend.Raw.eval_value (.sum f) ht L (bs i)
  obtain <vi, hvi, hsi> := DayCoend.Raw.eval_sum_cases (bs i) f he
  have : vi = fun j => DayCoend.Raw.value (f j) (hh j).2 L (bs i) := by
    funext j
    exact DayCoend.Raw.eval_unique (f j) (hh j).2 L (bs i) (hvi j)
  have : (L.obj n).HasSum
    (fun j => DayCoend.Raw.value (f j) (hh j).2 L (bs i))
    (DayCoend.Raw.value (.sum f) ht L (bs i)) := by
    rwa [this] at hsi
  exact (L.obj n).summation.unique (hrows i) this
rwa [hg] at hsumg

```

#### 4.4.493 Evaluation of the summability of the bilinear for Day coends

**Statement.** For superoperator modules  $M, N, L$ , a natural number  $n$ : if for every  $m, k, x, y$ , the family  $\text{fun } i \Rightarrow (\beta s \ i) . \text{app } x \ y$  sums to  $\gamma . \text{app } x \ y$ , then the family  $\text{fun } i \Rightarrow \text{DayCoend.evaluate } L \ (\beta s \ i) \ z$  sums to  $\text{DayCoend.evaluate } L \ \gamma \ z$ .

**Proof.** The argument proceeds by induction. It follows from the raw value of the summability of the bilinear for Day coends.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidCofree.lean](#)

```

theorem DayCoend.evaluate_hasSum_bilinear
  {M N L : Module} {n : Nat} {? : Type} [Countable ?]
  (bs : ? -> Bilinear M N L) (? : Bilinear M N L)
  (hpt : forall {m k : Nat} (x : (M.obj m).Carrier) (y : (N.obj k).Carrier),
    (L.obj (m * k)).HasSum (fun i => (bs i).app x y) (? .app x y))
  (z : DayCoend.Carrier M N n) :
  (L.obj n).HasSum
    (fun i => DayCoend.evaluate L (bs i) z)
    (DayCoend.evaluate L ? z) := by
  induction z using Quotient.inductionOn with
  | _ t =>
    change (L.obj n).HasSum
      (fun i => DayCoend.Term.value t L (bs i))
      (DayCoend.Term.value t L ?)
    exact DayCoend.raw_value_hasSum_bilinear bs ? hpt t.1 t.2.1 t.2.2

```

#### 4.4.494 The comonoid functorial action identity counit comultiplication

**Statement.** For a comonoid  $C$ : the composite of the functorial action of  $\text{Hom.id } C . \text{carrier}$  and  $C . \text{counit}$  after the comultiplication of  $C$  equals the inverse right unitor of the carrier of  $C$ .

**Proof.** Both sides are compared pointwise (by extensionality). It follows from the transitivity for semantic equalities of circuits.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidCofree.lean](#)

```

theorem comonoid_map_id_counit_comult (C : Comonoid) :
  Hom.comp (DayTensor.map (Hom.id C.carrier) C.counit) C.comult =
  DayTensor.rightUnitorInv C.carrier := by

```

```

have hinv := (DayTensor.rightUnitorIso C.carrier).inv_hom
have h := C.right_counit
refine Eq.trans ?_ (Eq.trans (congrArg
  (fun g => Hom.comp (DayTensor.rightUnitorInv C.carrier) g) h)
  (Hom.comp_id _))
refine Eq.trans (Eq.symm (Hom.id_comp _)) ?_
refine Eq.trans (congrArg (fun g => Hom.comp g
  (Hom.comp (DayTensor.map (Hom.id C.carrier) C.counit) C.comult))
  hinv.symm) ?_
ext n x; rfl

```

#### 4.4.495 Definition of the exponential cofree coefficient one

**Definition.** The exponential cofree coefficient one of  $C$  and  $f$  is a function of type  $\mathbb{N} \rightarrow \text{Hom } C.$   
 $\text{carrier dayTensorUnit}.$

**Construction.** Defined by cases on the input:  $0 \mapsto$  the counit of  $C$ ;  $n + 1 \mapsto$  the composition of the left unitor of  $\text{dayTensorUnit}.$

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidCofree.lean](#)

```

noncomputable def bangCofreeCoeffOne (C : Comonoid)
  (f : Hom C.carrier dayTensorUnit) :
  Nat -> Hom C.carrier dayTensorUnit
| 0 => C.counit
| n + 1 =>
  Hom.comp (DayTensor.leftUnitor dayTensorUnit)
    (Hom.comp (DayTensor.map (bangCofreeCoeffOne C f n) f) C.comult)

```

#### 4.4.496 Exponential cofree coefficient one of one

**Statement.** For a comonoid  $C$ , a module morphism  $f$ : the exponential cofree coefficient one of  $C$  and  $f$  at  $1$  equals  $f$ .

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the fact that the identity is a left unit for composition for module morphisms, the fact that the identity is a right unit for composition for module morphisms and the transitivity for semantic equalities of circuits.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidCofree.lean](#)

```

theorem bangCofreeCoeffOne_one (C : Comonoid)
  (f : Hom C.carrier dayTensorUnit) :
  bangCofreeCoeffOne C f 1 = f := by
  change Hom.comp (DayTensor.leftUnitor dayTensorUnit)
    (Hom.comp (DayTensor.map C.counit f) C.comult) = f
  have hfactor :
    DayTensor.map C.counit f =
      Hom.comp (DayTensor.map (Hom.id dayTensorUnit) f)
        (DayTensor.map C.counit (Hom.id C.carrier)) := by
  have h := DayTensor.map_comp (Hom.id dayTensorUnit) C.counit
    f (Hom.id C.carrier)
  simp only [Hom.id_comp, Hom.comp_id] at h
  exact h
  have hleft := comonoid_map_counit_id_comult C

```

```

refine Eq.trans (congrArg (fun g => Hom.comp (DayTensor.leftUnitor dayTensorUnit)
  (Hom.comp g C.comult))) hfactor) ?_
refine Eq.trans (by ext; rfl :
  Hom.comp (DayTensor.leftUnitor dayTensorUnit)
    (Hom.comp
      (Hom.comp (DayTensor.map (Hom.id dayTensorUnit) f)
        (DayTensor.map C.counit (Hom.id C.carrier)))
      C.comult) =
  Hom.comp (DayTensor.leftUnitor dayTensorUnit)
    (Hom.comp (DayTensor.map (Hom.id dayTensorUnit) f)
      (Hom.comp (DayTensor.map C.counit (Hom.id C.carrier))
        C.comult))) ?_
rw [hleft]
have hnatur := leftUnitor_natural f
refine Eq.trans (by ext; rfl :
  Hom.comp (DayTensor.leftUnitor dayTensorUnit)
    (Hom.comp (DayTensor.map (Hom.id dayTensorUnit) f)
      (DayTensor.leftUnitorInv C.carrier)) =
  Hom.comp
    (Hom.comp (DayTensor.leftUnitor dayTensorUnit)
      (DayTensor.map (Hom.id dayTensorUnit) f))
    (DayTensor.leftUnitorInv C.carrier)) ?_
refine Eq.trans (congrArg (fun g => Hom.comp g
  (DayTensor.leftUnitorInv C.carrier))) hnatur) ?_
refine Eq.trans (by ext; rfl :
  Hom.comp (Hom.comp f (DayTensor.leftUnitor C.carrier))
    (DayTensor.leftUnitorInv C.carrier) =
  Hom.comp f (Hom.comp (DayTensor.leftUnitor C.carrier)
    (DayTensor.leftUnitorInv C.carrier))) ?_
refine Eq.trans (congrArg (Hom.comp f)
  (DayTensor.leftUnitorIso C.carrier).hom_inv) ?_
exact Hom.comp_id f

```

#### 4.4.497 Exponential cofree coefficient one of the comultiplication

**Statement.** For a comonoid  $C$ , a module morphism  $f$ , natural numbers  $p, q$ : the composite of the functorial action of  $\text{bangCofreeCoeffOne } C \ f \ p$  and  $\text{bangCofreeCoeffOne } C \ f \ q$  after the comultiplication of  $C$  equals the composite of the inverse left unitor of  $\text{dayTensorUnit}$  after the exponential cofree coefficient one of  $C, f, p + q$ .

**Proof.** By induction on the natural number  $q$ . For zero, the claim is checked directly; for a successor, the claim follows from the induction hypothesis. The key step rewrites with the fact that zero is a right unit for addition for finitely supported sums, the fact that the identity is a right unit for composition for module morphisms, the fact that the identity is a left unit for composition for module morphisms and the comonoid functorial action identity counit comultiplication.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidCofree.lean](#)

```

theorem bangCofreeCoeffOne_comult (C : Comonoid)
  (f : Hom C.carrier dayTensorUnit) (p q : Nat) :
  Hom.comp
    (DayTensor.map (bangCofreeCoeffOne C f p) (bangCofreeCoeffOne C f q))
    C.comult =
  Hom.comp (DayTensor.leftUnitorInv dayTensorUnit)

```

```

      (bangCofreeCoeffOne C f (p + q)) := by
induction q generalizing p with
| zero =>
  change Hom.comp (DayTensor.map (bangCofreeCoeffOne C f p) C.counit) C.comult =
    Hom.comp (DayTensor.leftUnitorInv dayTensorUnit) (bangCofreeCoeffOne C f (p + 0))
  )
  rw [Nat.add_zero]
  have hfactor :
    DayTensor.map (bangCofreeCoeffOne C f p) C.counit =
      Hom.comp (DayTensor.map (bangCofreeCoeffOne C f p) (Hom.id dayTensorUnit))
        (DayTensor.map (Hom.id C.carrier) C.counit) := by
    have h := DayTensor.map_comp (bangCofreeCoeffOne C f p) (Hom.id C.carrier)
      (Hom.id dayTensorUnit) C.counit
    simp only [Hom.comp_id, Hom.id_comp] at h
    exact h
  refine Eq.trans (congrArg (fun g => Hom.comp g C.comult) hfactor) ?_
  refine Eq.trans (by ext; rfl :
    Hom.comp
      (Hom.comp (DayTensor.map (bangCofreeCoeffOne C f p) (Hom.id dayTensorUnit))
        (DayTensor.map (Hom.id C.carrier) C.counit))
      C.comult =
      Hom.comp (DayTensor.map (bangCofreeCoeffOne C f p) (Hom.id dayTensorUnit))
        (Hom.comp (DayTensor.map (Hom.id C.carrier) C.counit) C.comult)) ?_
  rw [comonoid_map_id_counit_comult C]
  refine Eq.trans (rightUnitorInv_natural (bangCofreeCoeffOne C f p)) ?_
  exact congrArg (fun g => Hom.comp g (bangCofreeCoeffOne C f p))
    leftUnitorInv_unit_eq_rightUnitorInv_unit.symm
| succ q ih =>
  let phi := bangCofreeCoeffOne C f
  let Delta := C.comult
  -- Unfold phi(q+1)
  have hphiq1 : phi (q + 1) =
    Hom.comp (DayTensor.leftUnitor dayTensorUnit)
      (Hom.comp (DayTensor.map (phi q) f) Delta) := rfl
  -- LHS rewrite chain
  have hL :
    Hom.comp (DayTensor.map (phi p) (phi (q + 1))) Delta =
      Hom.comp (DayTensor.map (Hom.id dayTensorUnit) (DayTensor.leftUnitor
        dayTensorUnit))
        (Hom.comp (DayTensor.associator dayTensorUnit dayTensorUnit dayTensorUnit)
          (Hom.comp
            (DayTensor.map (DayTensor.leftUnitorInv dayTensorUnit) (Hom.id
              dayTensorUnit))
              (Hom.comp (DayTensor.map (phi (p + q)) f) Delta))) := by
    -- Step through the calculation
    rw [hphiq1]
    -- map(php, fun comp mid) = map(id, fun ) comp map(php, mid)
    have hf1 :
      DayTensor.map (phi p)
        (Hom.comp (DayTensor.leftUnitor dayTensorUnit)
          (Hom.comp (DayTensor.map (phi q) f) Delta)) =
      Hom.comp (DayTensor.map (Hom.id dayTensorUnit) (DayTensor.leftUnitor
        dayTensorUnit))
        (DayTensor.map (phi p) (Hom.comp (DayTensor.map (phi q) f) Delta)) := by
      have h := DayTensor.map_comp (Hom.id dayTensorUnit) (phi p)

```

```

    (DayTensor.leftUnitor dayTensorUnit)
    (Hom.comp (DayTensor.map (phi q) f) Delta)
  simp only [Hom.id_comp] using h
  refine Eq.trans (congrArg (fun g => Hom.comp g Delta) hf1) ?_
  refine Eq.trans (by ext; rfl) ?_
  -- map(philp, map(phiq,f) comp Delta) = map(id, map(phiq,f)) comp map(philp,
Delta)
  have hf2 :
    DayTensor.map (phi p) (Hom.comp (DayTensor.map (phi q) f) Delta) =
      Hom.comp (DayTensor.map (Hom.id dayTensorUnit) (DayTensor.map (phi q) f))
        (DayTensor.map (phi p) Delta) := by
    have h := DayTensor.map_comp (Hom.id dayTensorUnit) (phi p)
      (DayTensor.map (phi q) f) Delta
    simp only [Hom.id_comp] using h
    refine Eq.trans (congrArg (fun g =>
      Hom.comp (DayTensor.map (Hom.id dayTensorUnit) (DayTensor.leftUnitor
dayTensorUnit))
        (Hom.comp g Delta)) hf2) ?_
    refine Eq.trans (by ext; rfl) ?_
  -- map(philp, Delta) = map(philp, id) comp map(id, Delta)
  have hf3 :
    DayTensor.map (phi p) Delta =
      Hom.comp (DayTensor.map (phi p) (Hom.id (dayTensor C.carrier C.carrier)))
        (DayTensor.map (Hom.id C.carrier) Delta) := by
    have h := DayTensor.map_comp (phi p) (Hom.id C.carrier)
      (Hom.id (dayTensor C.carrier C.carrier)) Delta
    simp only [Hom.comp_id, Hom.id_comp] using h
    refine Eq.trans (congrArg (fun g =>
      Hom.comp (DayTensor.map (Hom.id dayTensorUnit) (DayTensor.leftUnitor
dayTensorUnit))
        (Hom.comp (DayTensor.map (Hom.id dayTensorUnit) (DayTensor.map (phi q) f))
          (Hom.comp g Delta))) hf3) ?_
    refine Eq.trans (by ext; rfl) ?_
  -- coassoc: map(id,Delta) comp Delta = a comp map(Delta,id) comp Delta
  have hco := C.coassociative.symm
  refine Eq.trans (congrArg (fun g =>
    Hom.comp (DayTensor.map (Hom.id dayTensorUnit) (DayTensor.leftUnitor
dayTensorUnit))
      (Hom.comp (DayTensor.map (Hom.id dayTensorUnit) (DayTensor.map (phi q) f))
        (Hom.comp (DayTensor.map (phi p) (Hom.id (dayTensor C.carrier C.carrier)
)) g)))
    hco) ?_
  refine Eq.trans (by ext; rfl) ?_
  -- map(id, map(phiq,f)) comp map(philp, id) = map(philp, map(phiq,f))
  have hf4 :
    Hom.comp (DayTensor.map (Hom.id dayTensorUnit) (DayTensor.map (phi q) f))
      (DayTensor.map (phi p) (Hom.id (dayTensor C.carrier C.carrier))) =
      DayTensor.map (phi p) (DayTensor.map (phi q) f) := by
    have h := DayTensor.map_comp (Hom.id dayTensorUnit) (phi p)
      (DayTensor.map (phi q) f) (Hom.id (dayTensor C.carrier C.carrier))
    simp only [Hom.comp_id, Hom.id_comp] using h.symm
  -- Reassociate to apply hf4 before a
  refine Eq.trans (by ext; rfl :
    Hom.comp (DayTensor.map (Hom.id dayTensorUnit) (DayTensor.leftUnitor
dayTensorUnit))
      (Hom.comp (DayTensor.map (Hom.id dayTensorUnit) (DayTensor.map (phi q) f

```

```

))
    (Hom.comp (DayTensor.map (phi p) (Hom.id (dayTensor C.carrier C.
carrier))))
    (Hom.comp (DayTensor.associator C.carrier C.carrier C.carrier)
    (Hom.comp (DayTensor.map Delta (Hom.id C.carrier)) Delta))) =
    Hom.comp (DayTensor.map (Hom.id dayTensorUnit) (DayTensor.leftUnitor
dayTensorUnit))
    (Hom.comp
    (Hom.comp (DayTensor.map (Hom.id dayTensorUnit) (DayTensor.map (phi q)
f))
    (DayTensor.map (phi p) (Hom.id (dayTensor C.carrier C.carrier))))
    (Hom.comp (DayTensor.associator C.carrier C.carrier C.carrier)
    (Hom.comp (DayTensor.map Delta (Hom.id C.carrier)) Delta))) ?_
    refine Eq.trans (congrArg (fun g =>
    Hom.comp (DayTensor.map (Hom.id dayTensorUnit) (DayTensor.leftUnitor
dayTensorUnit))
    (Hom.comp g
    (Hom.comp (DayTensor.associator C.carrier C.carrier C.carrier)
    (Hom.comp (DayTensor.map Delta (Hom.id C.carrier)) Delta)))) hf4) ?_
    -- associator naturality: map(php, map(phiq,f)) comp a = a' comp map(map(
php,phiq), f)
    have hnat := DayTensor.associator_naturality (phi p) (phi q) f
    -- hnat: a' comp map(map php phiq, f) = map(php, map(phiq,f)) comp a
    -- so map(php, map(phiq,f)) comp a = a' comp map(map(php,phiq), f)
    refine Eq.trans (by ext; rfl :
    Hom.comp (DayTensor.map (Hom.id dayTensorUnit) (DayTensor.leftUnitor
dayTensorUnit))
    (Hom.comp (DayTensor.map (phi p) (DayTensor.map (phi q) f))
    (Hom.comp (DayTensor.associator C.carrier C.carrier C.carrier)
    (Hom.comp (DayTensor.map Delta (Hom.id C.carrier)) Delta))) =
    Hom.comp (DayTensor.map (Hom.id dayTensorUnit) (DayTensor.leftUnitor
dayTensorUnit))
    (Hom.comp
    (Hom.comp (DayTensor.map (phi p) (DayTensor.map (phi q) f))
    (DayTensor.associator C.carrier C.carrier C.carrier))
    (Hom.comp (DayTensor.map Delta (Hom.id C.carrier)) Delta))) ?_
    refine Eq.trans (congrArg (fun g =>
    Hom.comp (DayTensor.map (Hom.id dayTensorUnit) (DayTensor.leftUnitor
dayTensorUnit))
    (Hom.comp g (Hom.comp (DayTensor.map Delta (Hom.id C.carrier)) Delta)))
    hnat.symm) ?_
    refine Eq.trans (by ext; rfl) ?_
    -- map(map(php,phiq), f) comp map(Delta, id) = map(map(php,phiq) comp Delta,
f)
    have hf5 :
    Hom.comp (DayTensor.map (DayTensor.map (phi p) (phi q)) f)
    (DayTensor.map Delta (Hom.id C.carrier)) =
    DayTensor.map (Hom.comp (DayTensor.map (phi p) (phi q)) Delta) f := by
    have h := DayTensor.map_comp (DayTensor.map (phi p) (phi q)) Delta
    f (Hom.id C.carrier)
    simp only [Hom.comp_id] using h.symm
    refine Eq.trans (congrArg (fun g =>
    Hom.comp (DayTensor.map (Hom.id dayTensorUnit) (DayTensor.leftUnitor
dayTensorUnit))
    (Hom.comp (DayTensor.associator dayTensorUnit dayTensorUnit dayTensorUnit)
    (Hom.comp g Delta)))) hf5) ?_

```

```

-- IH: map(hip, phiq) comp Delta = fun ^-1 comp phi(p+q)
have hih := ih p
-- hih: map(hip, phiq) comp Delta = fun ^-1 comp phi(p+q)
refine Eq.trans (congrArg (fun g =>
  Hom.comp (DayTensor.map (Hom.id dayTensorUnit) (DayTensor.leftUnitor
dayTensorUnit))
    (Hom.comp (DayTensor.associator dayTensorUnit dayTensorUnit dayTensorUnit)
      (Hom.comp (DayTensor.map g f) Delta))) hih) ?_
-- map(fun ^-1 comp phi(p+q), f) = map(fun ^-1, id) comp map(phi(p+q), f)
have hf6 :
  DayTensor.map
    (Hom.comp (DayTensor.leftUnitorInv dayTensorUnit) (phi (p + q))) f =
    Hom.comp
      (DayTensor.map (DayTensor.leftUnitorInv dayTensorUnit) (Hom.id
dayTensorUnit))
      (DayTensor.map (phi (p + q)) f) := by
  have h := DayTensor.map_comp (DayTensor.leftUnitorInv dayTensorUnit) (phi (p +
q))
    (Hom.id dayTensorUnit) f
  simpa only [Hom.id_comp] using h
  refine Eq.trans (congrArg (fun g =>
    Hom.comp (DayTensor.map (Hom.id dayTensorUnit) (DayTensor.leftUnitor
dayTensorUnit))
      (Hom.comp (DayTensor.associator dayTensorUnit dayTensorUnit dayTensorUnit)
        (Hom.comp g Delta))) hf6) ?_
ext; rfl
-- Now apply coherence to collapse (id?fun ) comp a comp (fun ^-1?id)
have hcoh := leftUnitor_associator_coherence
have hL2 :
  Hom.comp (DayTensor.map (phi p) (phi (q + 1))) Delta =
  Hom.comp (DayTensor.map (phi (p + q)) f) Delta := by
  refine Eq.trans hL ?_
  refine Eq.trans (by ext; rfl :
    Hom.comp (DayTensor.map (Hom.id dayTensorUnit) (DayTensor.leftUnitor
dayTensorUnit))
      (Hom.comp (DayTensor.associator dayTensorUnit dayTensorUnit
dayTensorUnit)
        (Hom.comp
          (DayTensor.map (DayTensor.leftUnitorInv dayTensorUnit) (Hom.id
dayTensorUnit))
          (Hom.comp (DayTensor.map (phi (p + q)) f) Delta))) =
        Hom.comp
          (Hom.comp (DayTensor.map (Hom.id dayTensorUnit) (DayTensor.leftUnitor
dayTensorUnit))
            (Hom.comp (DayTensor.associator dayTensorUnit dayTensorUnit
dayTensorUnit)
              (DayTensor.map (DayTensor.leftUnitorInv dayTensorUnit) (Hom.id
dayTensorUnit))))
            (Hom.comp (DayTensor.map (phi (p + q)) f) Delta)) ?_
    refine Eq.trans (congrArg (fun g => Hom.comp g
      (Hom.comp (DayTensor.map (phi (p + q)) f) Delta)) hcoh) ?_
  exact Hom.id_comp _
-- RHS: fun ^-1 comp phi(p+q+1) = fun ^-1 comp fun comp map(phi(p+q), f)
comp Delta = map(phi(p+q), f) comp Delta
have hR :
  Hom.comp (DayTensor.leftUnitorInv dayTensorUnit) (phi (p + (q + 1))) =

```



```

    Hom.comp (DayTensor.map (phi (p + q)) f) Delta := by
have hadd : p + (q + 1) = (p + q) + 1 := by omega
rw [hadd]
change Hom.comp (DayTensor.leftUnitorInv dayTensorUnit)
  (Hom.comp (DayTensor.leftUnitor dayTensorUnit)
    (Hom.comp (DayTensor.map (phi (p + q)) f) Delta)) = _
refine Eq.trans (by ext; rfl) ?_
refine Eq.trans (congrArg (fun g => Hom.comp g
  (Hom.comp (DayTensor.map (phi (p + q)) f) Delta))
  (DayTensor.leftUnitorIso dayTensorUnit).inv_hom) ?_
exact Hom.id_comp _
exact Eq.trans hL2 hR.symm

```

#### 4.4.498 Definition of the exponential cofree lift one

**Definition.** The exponential cofree lift one of  $C$  and  $f$  is a module morphism from  $C.\text{carrier}$  to  $\text{bang } 1$ .

**Construction.** Defined by an explicit formula built from the countable product lift, the symmetric power, the composition and the symmetric power projection.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidCofree.lean](#)

```

noncomputable def bangCofreeLiftOne (C : Comonoid)
  (f : Hom C.carrier (representable 1)) :
  Hom C.carrier (bang 1) :=
countableProductLift (fun j => symmetricPower 1 j)
  (fun k =>
    Hom.comp (symmetricPowerProjection 1 k)
      (Hom.comp
        (yonedaMap
          (Superoperator.ofEquivalence
            (finCongr (tensorPowerDimension_one_eq k).symm)))
        (bangCofreeCoeffOne C f k)))

```

#### 4.4.499 Map induced by an index equivalence of a transport along an equality of one of zero

**Statement.** The map induced by an index equivalence of the finite index congruence of  $(\text{tensorPowerDimension\_one\_eq } 0).\text{symm}$  equals the identity on dimension 1.

**Proof.** It follows from the fact that observational equality is transitive.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidCofree.lean](#)

```

private theorem ofEquiv_cast_one_zero :
  Superoperator.ofEquivalence
    (finCongr (tensorPowerDimension_one_eq 0).symm) =
  Superoperator.identity 1 := by
have h := ofEquivalence_dim_one
  (show 1 = 1 from rfl)
  (show tensorPowerDimension 1 0 = 1 from rfl)
  (finCongr (tensorPowerDimension_one_eq 0).symm)
  (Equiv.refl (Fin 1))
exact h.trans (Superoperator.ofEquivalence_refl 1)

```

#### 4.4.500 Map induced by an index equivalence of a transport along an equality of one of one of the forward

**Statement.** The map induced by an index equivalence of the finite index congruence of `tensorPower Dimension_one 1` equals the identity on dimension 1.

**Proof.** It follows from the fact that observational equality is transitive.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidCofree.lean](#)

```
private theorem ofEquiv_cast_one_one_fwd :
  Superoperator.ofEquivalence
    (finCongr (tensorPowerDimension_one 1)) =
    Superoperator.identity 1 := by
  have h := ofEquivalence_dim_one
    (show tensorPowerDimension 1 1 = 1 from rfl)
    (show 1 = 1 from rfl)
    (finCongr (tensorPowerDimension_one 1))
    (Equiv.refl (Fin 1))
  exact h.trans (Superoperator.ofEquivalence_refl 1)
```

#### 4.4.501 Map induced by an index equivalence of a transport along an equality of one of one of the backward

**Statement.** The map induced by an index equivalence of the finite index congruence of `(tensorPower Dimension_one_eq 1).symm` equals the identity on dimension 1.

**Proof.** It follows from the fact that observational equality is transitive.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidCofree.lean](#)

```
private theorem ofEquiv_cast_one_one_bwd :
  Superoperator.ofEquivalence
    (finCongr (tensorPowerDimension_one_eq 1).symm) =
    Superoperator.identity 1 := by
  have h := ofEquivalence_dim_one
    (show 1 = 1 from rfl)
    (show tensorPowerDimension 1 1 = 1 from rfl)
    (finCongr (tensorPowerDimension_one_eq 1).symm)
    (Equiv.refl (Fin 1))
  exact h.trans (Superoperator.ofEquivalence_refl 1)
```

#### 4.4.502 The exponential cofree lift one preserves the counit

**Statement.** For a comonoid  $C$ , a module morphism  $f$ : the composite of the counit of the exponential at 1 after the exponential cofree lift one of  $C$  and  $f$  equals the counit of  $C$ .

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the map induced by an index equivalence of a transport along an equality of one of zero and the identity of a composite for superoperators.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidCofree.lean](#)

```

theorem bangCofreeLiftOne_preserves_counit (C : Comonoid)
  (f : Hom C.carrier (representable 1)) :
  Hom.comp (bangCounit 1) (bangCofreeLiftOne C f) = C.counit := by
ext n x
change
  Superoperator.comp (symmetricAverage 1 0)
    (Superoperator.comp
      (Superoperator.ofEquivalence
        (finCongr (tensorPowerDimension_one_eq 0).symm))
      (C.counit.app n x)) =
    C.counit.app n x
have havg := symmetricAverage_of_le_one 1 0 (Nat.le_refl 1)
-- Rewrite both to identity 1 explicitly
rw [havg, ofEquiv_cast_one_zero]
-- goal: identity(tpd).comp (identity 1 .comp counit) = counit
-- tpd = 1 defeq, so identity(tpd) = identity 1
change Superoperator.comp (Superoperator.identity 1)
  (Superoperator.comp (Superoperator.identity 1)
    (C.counit.app n x)) = C.counit.app n x
simp only [Superoperator.identity_comp]
exact Superoperator.identity_comp _

```

#### 4.4.503 Exponential cofree lift one of the forget

**Statement.** For a comonoid  $C$ , a module morphism  $f$ : the composite of the dereliction at 1 after the exponential cofree lift one of  $C$  and  $f$  equals  $f$ .

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the exponential cofree coefficient one of one, the for  $A \leq 1$ , symmetric averaging coincides with the identity channel, the map induced by an index equivalence of a transport along an equality of one of one of the forward and the map induced by an index equivalence of a transport along an equality of one of one of the backward.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

theorem bangCofreeLiftOne_forget (C : Comonoid)
  (f : Hom C.carrier (representable 1)) :
  Hom.comp (bangDereliction 1) (bangCofreeLiftOne C f) = f := by
ext n x
change Superoperator.comp
  (Superoperator.ofEquivalence
    (finCongr (tensorPowerDimension_one 1)))
  (Superoperator.comp (symmetricAverage 1 1)
    (Superoperator.comp
      (Superoperator.ofEquivalence
        (finCongr (tensorPowerDimension_one_eq 1).symm))
      ((bangCofreeCoeffOne C f 1).app n x))) =
  f.app n x
rw [bangCofreeCoeffOne_one, symmetricAverage_of_le_one 1 1 (Nat.le_refl 1),
  ofEquiv_cast_one_one_fwd, ofEquiv_cast_one_one_bwd]
change Superoperator.comp (Superoperator.identity 1)
  (Superoperator.comp (Superoperator.identity 1)
    (Superoperator.comp (Superoperator.identity 1)
      (f.app n x))) = f.app n x
simp only [Superoperator.identity_comp]
exact Superoperator.identity_comp _

```

#### 4.4.504 Underlying value of the exponential cofree lift one

**Statement.** For a comonoid  $C$ , a module morphism  $f$ , natural numbers  $k, n$ :  $((\text{bangCofreeLiftOne } C \ f) . \text{app } n \ x) \ k) . \text{val}$  equals an explicit expression in the composition, the symmetric average, the map induced by an index equivalence and the finite index congruence.

**Proof.** By definition: the left-hand side,  $((\text{bangCofreeLiftOne } C \ f) . \text{app } n \ x) \ k) . \text{val}$ , and the right-hand side, an explicit expression in the composition, the symmetric average, the map induced by an index equivalence and the finite index congruence, unfold to the same term.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidCofree.lean](#)

```
theorem bangCofreeLiftOne_val (C : Comonoid)
  (f : Hom C.carrier (representable 1)) (k n : Nat)
  (x : (C.carrier.obj n).Carrier) :
  (((bangCofreeLiftOne C f).app n x) k).val =
    Superoperator.comp
      (symmetricAverage 1 k)
      (Superoperator.comp
        (Superoperator.ofEquivalence
          (finCongr (tensorPowerDimension_one_eq k).symm))
        ((bangCofreeCoeffOne C f k).app n x)) :=
  rfl
```

#### 4.4.505 Equality with rec of the symmetry of the cancel

**Statement.** If  $a = b$ , then the Hadamard gate on wire the symmetry of  $\blacktriangleright$  and  $x$  equals  $x$ .

**Proof.** The hypotheses are unpacked into their constituent data.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidCofree.lean](#)

```
private theorem eq_rec_symm_cancel {a : Sort*} {a b : a} (h : a = b)
  {b : a -> Sort*} (x : b b) : h |> (h.symm |> x) = x := by
  cases h; rfl
```

#### 4.4.506 Cast alignment: exponential one coefficient of the lifted series recovers the cofree coefficient morphisms

**Statement.** Cast alignment:  $\text{bangOneCoeff}$  of the lifted series recovers the cofree coefficient morphisms. Formally:  $\text{bangOneCoeff } n \ k \ (((\text{bangCofreeLiftOne } C \ f) . \text{app } n \ x) \ k) = (\text{bangCofreeCoeffOne } C \ f \ k) . \text{app } n \ x$ .

**Proof.** The key step rewrites with the definition of the exponential one coefficient, the underlying value of the exponential cofree lift one, the for  $A \leq 1$ , symmetric averaging coincides with the identity channel and the identity of a composite for superoperators.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidCofree.lean](#)

```
theorem bangOneCoeff_liftOne (C : Comonoid)
  (f : Hom C.carrier (representable 1)) (k n : Nat)
  (x : (C.carrier.obj n).Carrier) :
  bangOneCoeff n k (((bangCofreeLiftOne C f).app n x) k) =
    (bangCofreeCoeffOne C f k).app n x := by
```

```

dsimp only [bangOneCoeff]
rw [bangCofreeLiftOne_val, symmetricAverage_of_le_one 1 k (by omega),
    Superoperator.identity_comp]
have h := ofEquiv_comp_tpd (k := k) ((bangCofreeCoeffOne C f k).app n x)
refine Eq.trans (congrArg
  (fun psi : Superoperator n (tensorPowerDimension 1 k) =>
    (tensorPowerDimension_one_eq k) |> psi) h) ?_
exact eq_rec_symm_cancel (tensorPowerDimension_one_eq k) _

```

#### 4.4.507 Exponential comultiplication component of the lift one of the evaluation

**Statement.** For a comonoid  $C$ , a module morphism  $f$ , natural numbers  $p, q, n$ , a superoperator module  $L$ : an explicit expression in the evaluation, the exponential comultiplication component and the exponential cofree lift one equals the act of  $\beta.app$  (bangDegreeUnitOne  $p$ ) (bangDegreeUnitOne  $q$ ) and (bangCofreeCoeffOne  $C f (p + q)$ ).app  $n x$ .

**Proof.** The key step rewrites with the fact that evaluation at  $A = 1$ : Day component equals rectangle coefficient acted by the total-degree series channel and the cast alignment: exponential one coefficient of the lifted series recovers the cofree coefficient morphisms.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

theorem bangComultComponent_liftOne_evaluate (C : Comonoid)
  (f : Hom C.carrier (representable 1)) (p q n : Nat)
  (x : (C.carrier.obj n).Carrier)
  (L : Module) (b : Bilinear (bang 1) (bang 1) L) :
  DayCoend.evaluate L b
    ((bangComultComponent 1 p q).app n
     ((bangCofreeLiftOne C f).app n x)) =
  L.act (b.app (bangDegreeUnitOne p) (bangDegreeUnitOne q))
    ((bangCofreeCoeffOne C f (p + q)).app n x) := by
  rw [bangComultComponent_evaluate_one, bangOneCoeff_liftOne]

/ -! ## Remaining gate-3 obligations -/-! ## A = 1 cofree packaging -/

```

#### 4.4.508 $A = 1$ cofree packaging

**Definition.** `## A = 1 cofree packaging.`

**Construction.** Defined to be the Yoneda image of the map induced by an index equivalence of `fin` `Congr (tensorPowerDimension_one_eq k).symm`.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

noncomputable def bangOneCast (k : Nat) :
  Hom (representable 1) (representable (tensorPowerDimension 1 k)) :=
  yonedaMap
    (Superoperator.ofEquivalence
     (finCongr (tensorPowerDimension_one_eq k).symm))

```

#### 4.4.509 Definition of the exponential cofree factor one

**Definition.** The exponential cofree factor one of  $C$ ,  $f$  and  $k$  is a module morphism from  $C.\text{carrier}$  to  $\text{bang } 1$ .

**Construction.** Defined to be the composite of the representable to exponential of  $k$  at  $1$  after the composite of  $\text{bangOneCast } k$  after  $\text{bangCofreeCoeffOne } C \ f \ k$ .

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
noncomputable def bangCofreeFactorOne (C : Comonoid)
  (f : Hom C.carrier (representable 1)) (k : Nat) :
  Hom C.carrier (bang 1) :=
  Hom.comp (representableToBang 1 k)
    (Hom.comp (bangOneCast k) (bangCofreeCoeffOne C f k))
```

#### 4.4.510 Exponential one coefficient of the representable to exponential of a transport along an equality

**Statement.** For natural numbers  $k$ ,  $n$ , a superoperator  $\Phi$ : an explicit expression in the exponential one coefficient, the representable to exponential and the exponential one transport along an equality equals  $\Phi$ .

**Proof.** The key step rewrites with the definition of the exponential one coefficient, the for  $A \leq 1$ , symmetric averaging coincides with the identity channel, the identity of a composite for superoperators and the transitivity for semantic equalities of circuits.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
theorem bangOneCoeff_repToBang_cast (k n : Nat) (? : Superoperator n 1) :
  bangOneCoeff n k
    (((representableToBang 1 k).app n ((bangOneCast k).app n ?)) k) =
  ? := by
  let ? : Superoperator n (tensorPowerDimension 1 k) :=
    (bangOneCast k).app n ?
  have hslot :
    ((representableToBang 1 k).app n ?) k =
    (symmetricPowerProjection 1 k).app n ? := by
  change (if h : k = k then
    h.symm |> (symmetricPowerProjection 1 k).app n ? else 0) = _
  simp only [reduceDite]
  rw [hslot]
  dsimp only [bangOneCoeff]
  have hval :
    ((symmetricPowerProjection 1 k).app n ?).val =
    Superoperator.comp (symmetricAverage 1 k) ? := rfl
  rw [hval, symmetricAverage_of_le_one 1 k (by omega),
    Superoperator.identity_comp]
  have h? : ? =
    Superoperator.comp
      (Superoperator.ofEquivalence
        (finCongr (tensorPowerDimension_one_eq k).symm))
        ? := rfl
  rw [h?]
  have h := ofEquiv_comp_tpd (k := k) ?
  refine Eq.trans (congrArg
```

```

    (fun psi : Superoperator n (tensorPowerDimension 1 k) =>
      (tensorPowerDimension_one_eq k) |> psi) h) ?_
exact eq_rec_symm_cancel (tensorPowerDimension_one_eq k) ?

```

#### 4.4.511 The exponential degree unit one equals a factor

**Statement.** For a natural number  $k$ : the exponential degree unit one of  $k$  equals an explicit expression in the representable to exponential, the exponential one transport along an equality and the identity.

**Proof.** The key step rewrites with the composition of the identity for superoperators and the identity cast along a dimension equality as a basis equivalence.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

theorem bangDegreeUnitOne_eq_factor (k : Nat) :
  bangDegreeUnitOne k =
    (representableToBang 1 k).app 1
      ((bangOneCast k).app 1 (Superoperator.identity 1)) := by
change
  (bangInjection 1 k).app 1 (bangOneDegreeUnits k) =
    (bangInjection 1 k).app 1
      ((symmetricPowerProjection 1 k).app 1
        ((bangOneCast k).app 1 (Superoperator.identity 1)))
congr 1
change
  (symmetricPowerProjection 1 k).app 1
    (cast (congrArg (Superoperator 1)
      (tensorPowerDimension_one_eq k).symm)
      (Superoperator.identity 1)) =
    (symmetricPowerProjection 1 k).app 1
      (Superoperator.comp
        (Superoperator.ofEquivalence
          (finCongr (tensorPowerDimension_one_eq k).symm))
        (Superoperator.identity 1))
congr 1
rw [Superoperator.comp_identity]
exact cast_identity_eq_ofEquivalence (tensorPowerDimension_one_eq k).symm

```

#### 4.4.512 Exponential comultiplication component of a composite of a transport along an equality of the evaluation

**Statement.** For natural numbers  $p, q, n$ , a superoperator  $\Phi$ , a superoperator module  $L$ : an explicit expression in the evaluation, the exponential comultiplication component, the representable to exponential and the exponential one transport along an equality equals an explicit expression in the evaluation, the functorial action, the composition and the representable to exponential.

**Proof.** The key step rewrites with the fact that evaluation at  $A = 1$ : Day component equals rectangle coefficient acted by the total-degree series channel, the exponential one coefficient of the representable to exponential of a transport along an equality, the evaluation of a mapped family for Day tensor products and the evaluation on an introduced element.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

theorem bangComultComponent_comp_cast_evaluate (p q n : Nat)
  (? : Superoperator n 1)
  (L : Module) (b : Bilinear (bang 1) (bang 1) L) :
  DayCoend.evaluate L b
    ((bangComultComponent 1 p q).app n
      ((representableToBang 1 (p + q)).app n
        ((bangOneCast (p + q)).app n ?))) =
  DayCoend.evaluate L b
    ((DayTensor.map
      (Hom.comp (representableToBang 1 p) (bangOneCast p))
      (Hom.comp (representableToBang 1 q) (bangOneCast q))).app n
      ((DayTensor.leftUnitorInv dayTensorUnit).app n ?)) := by
  rw [bangComultComponent_evaluate_one, bangOneCoeff_repToBang_cast,
    DayTensor.evaluate_map]
  let fp : Hom (representable 1) (bang 1) :=
    Hom.comp (representableToBang 1 p) (bangOneCast p)
  let fq : Hom (representable 1) (bang 1) :=
    Hom.comp (representableToBang 1 q) (bangOneCast q)
  let ? : Bilinear (representable 1) (representable 1) L :=
    Bilinear.precomp b fp fq
  set id1 : (dayTensorUnit.obj 1).Carrier := Superoperator.identity 1
  set ?1 : (dayTensorUnit.obj n).Carrier := ?
  let gen := (DayCoend.intro dayTensorUnit dayTensorUnit).app id1 ?1
  let U := Superoperator.tensorLeftUnitorInv n
  have heval :
    DayCoend.evaluate L ? ((DayTensor.leftUnitorInv dayTensorUnit).app n ?1) =
      L.act (DayCoend.evaluate L ? gen) U := by
  change DayCoend.evaluate L ? (DayCoend.action gen U) = _
  exact DayCoend.evaluate_action ? gen U
  change
    L.act (b.app (bangDegreeUnitOne p) (bangDegreeUnitOne q))
      (?1 : Superoperator n 1) =
    DayCoend.evaluate L ?
      ((DayTensor.leftUnitorInv dayTensorUnit).app n ?1)
  rw [heval, DayCoend.evaluate_intro ? id1 ?1]
  have hnata :
    ?.app id1 ?1 =
      L.act (?.app id1 id1)
        (Superoperator.tensor (Superoperator.identity 1) ?1) := by
  have h := ?.naturality id1 id1 (Superoperator.identity 1) ?1
  have hid : dayTensorUnit.act id1 (Superoperator.identity 1) = id1 :=
    dayTensorUnit.act_id id1
  have h? : dayTensorUnit.act id1 ?1 = ?1 := by
    change Superoperator.comp (id1 : Superoperator 1 1) ?1 = ?1
    exact Superoperator.identity_comp _
  rw [hid, h?] at h; exact h
  rw [hnata, L.act_comp]
  have hcomp :
    Superoperator.comp
      (Superoperator.tensor (Superoperator.identity 1) ?1) U =
      (?1 : Superoperator n 1) := by
  change Superoperator.comp
    (Superoperator.tensor (Superoperator.identity 1) ?1)
    (Superoperator.tensorLeftUnitorInv n) = ?1
  rw [Superoperator.tensorLeftUnitorInv_naturality ?1,
    tensorLeftUnitorInv_one]

```



```

    exact Superoperator.identity_comp ?1
  rw [hcomp]
  change
    L.act (b.app (bangDegreeUnitOne p) (bangDegreeUnitOne q)) ?1 =
      L.act (b.app (fp.app 1 id1) (fq.app 1 id1)) ?1
  congr 1; congr 1
  * exact bangDegreeUnitOne_eq_factor p
  * exact bangDegreeUnitOne_eq_factor q

```

#### 4.4.513 Exponential comultiplication component of a composite of a transport along an equality

**Statement.** For natural numbers  $p, q$ : the composite of the exponential comultiplication component of  $p$  and  $q$  at  $1$  after the composite of `representableToBang 1 (p + q)` after `bangOneCast (p + q)` equals the composite of the functorial action of `Hom.comp (representableToBang 1 p) (bangOneCast p)` and `Hom.comp (representableToBang 1 q) (bangOneCast q)` after the inverse left unitor of `dayTensorUnit`.

**Proof.** Both sides are compared pointwise (by extensionality). It follows from the extensionality for module morphisms, the fact that Day tensor elements are determined by all bilinear evaluations and the exponential comultiplication component of a composite of a transport along an equality of the evaluation.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

theorem bangComultComponent_comp_cast (p q : Nat) :
  Hom.comp (bangComultComponent 1 p q)
    (Hom.comp (representableToBang 1 (p + q)) (bangOneCast (p + q))) =
  Hom.comp
    (DayTensor.map
      (Hom.comp (representableToBang 1 p) (bangOneCast p))
      (Hom.comp (representableToBang 1 q) (bangOneCast q)))
    (DayTensor.leftUnitorInv dayTensorUnit) := by
  apply Hom.ext
  intro n ?
  apply dayTensor_ext
  intro L b
  exact bangComultComponent_comp_cast_evaluate p q n ? L b

```

#### 4.4.514 The exponential comultiplication component of a composite of the lift one equals a coefficient

**Statement.** For a comonoid  $C$ , a module morphism  $f$ , natural numbers  $p, q$ : the composite of the exponential comultiplication component of  $p$  and  $q$  at  $1$  after the exponential cofree lift one of  $C$  and  $f$  equals the composite of the exponential comultiplication component of  $p$  and  $q$  at  $1$  after the exponential cofree factor one of  $C, f, p + q$ .

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the exponential comultiplication component of the lift one of the evaluation, the fact that evaluation at  $A = 1$ : Day component equals rectangle coefficient acted by the total-degree series channel, the extensionality for module morphisms and the fact that Day tensor elements are determined by all bilinear evaluations.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

theorem bangComultComponent_comp_liftOne_eq_coeff (C : Comonoid)
  (f : Hom C.carrier (representable 1)) (p q : Nat) :
  Hom.comp (bangComultComponent 1 p q) (bangCofreeLiftOne C f) =
    Hom.comp (bangComultComponent 1 p q)
      (bangCofreeFactorOne C f (p + q)) := by
  apply Hom.ext
  intro n x
  apply dayTensor_ext
  intro L b
  change
    DayCoend.evaluate L b
      ((bangComultComponent 1 p q).app n
        ((bangCofreeLiftOne C f).app n x)) =
    DayCoend.evaluate L b
      ((bangComultComponent 1 p q).app n
        (bangCofreeFactorOne C f (p + q)).app n x))
  rw [bangComultComponent_liftOne_evaluate, bangComultComponent_evaluate_one]
  have hcoeff :
    bangOneCoeff n (p + q)
      (((bangCofreeFactorOne C f (p + q)).app n x) (p + q)) =
      (bangCofreeCoeffOne C f (p + q)).app n x :=
    bangOneCoeff_repToBang_cast (p + q) n
      ((bangCofreeCoeffOne C f (p + q)).app n x)
  rw [hcoeff]

```

#### 4.4.515 Exponential comultiplication component of a composite of the lift one

**Statement.** For a comonoid  $C$ , a module morphism  $f$ , natural numbers  $p, q$ : the composite of the exponential comultiplication component of  $p$  and  $q$  at 1 after the exponential cofree lift one of  $C$  and  $f$  equals the composite of the functorial action of  $\text{bangCofreeFactorOne } C \ f \ p$  and  $\text{bangCofreeFactorOne } C \ f \ q$  after the comultiplication of  $C$ .

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the fact that the exponential comultiplication component of a composite of the lift one equals a coefficient, the transitivity for semantic equalities of circuits and congruence of function application.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

theorem bangComultComponent_comp_liftOne (C : Comonoid)
  (f : Hom C.carrier (representable 1)) (p q : Nat) :
  Hom.comp (bangComultComponent 1 p q) (bangCofreeLiftOne C f) =
    Hom.comp
      (DayTensor.map
        (bangCofreeFactorOne C f p) (bangCofreeFactorOne C f q))
      C.comult := by
  rw [bangComultComponent_comp_liftOne_eq_coeff]
  change Hom.comp (bangComultComponent 1 p q)
    (Hom.comp (representableToBang 1 (p + q))
      (Hom.comp (bangOneCast (p + q)) (bangCofreeCoeffOne C f (p + q)))) = _
  refine Eq.trans (by ext; rfl) ?_
  refine Eq.trans (congrArg (fun g => Hom.comp g (bangCofreeCoeffOne C f (p + q))))
    (bangComultComponent_comp_cast p q) ?_
  refine Eq.trans (by ext; rfl) ?_
  refine Eq.trans (congrArg

```

```

(Hom.comp (DayTensor.map
  (Hom.comp (representableToBang 1 p) (bangOneCast p))
  (Hom.comp (representableToBang 1 q) (bangOneCast q))))
(bangCofreeCoeffOne_comult C f p q).symm) ?_
have hmap := DayTensor.map_comp
  (Hom.comp (representableToBang 1 p) (bangOneCast p))
  (bangCofreeCoeffOne C f p)
  (Hom.comp (representableToBang 1 q) (bangOneCast q))
  (bangCofreeCoeffOne C f q)
refine Eq.trans (by ext; rfl) ?_
exact congrArg (fun g => Hom.comp g C.comult) hmap.symm

```

#### 4.4.516 The exponential cofree lift one summability factors

**Statement.** For a comonoid  $C$ , a module morphism  $f$ : the family `bangCofreeFactorOne C f` sums to `bangCofreeLiftOne C f`.

**Proof.** Both sides are compared pointwise (by extensionality).

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

theorem bangCofreeLiftOne_hasSum_factors (C : Comonoid)
  (f : Hom C.carrier (representable 1)) :
  Hom.HasSum (bangCofreeFactorOne C f) (bangCofreeLiftOne C f) := by
  intro n x
  have hcoord :=
    countableProduct_hasSum_coordinates
    (fun j => symmetricPower 1 j) n ((bangCofreeLiftOne C f).app n x)
  have hfun :
    (fun k => (bangCofreeFactorOne C f k).app n x) =
    (fun k =>
      (bangInjection 1 k).app n
      ((bangCofreeLiftOne C f).app n x) k)) := by
    funext k
    rfl
  rw [hfun]
  exact hcoord

```

#### 4.4.517 The exponential cofree lift one preserves the comultiplication

**Statement.** For a comonoid  $C$ , a module morphism  $f$ : the composite of the exponential comultiplication one after the exponential cofree lift one of  $C$  and  $f$  equals the composite of the functorial action of `bangCofreeLiftOne C f` after the comultiplication of  $C$ .

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the components of the composition, the extensionality for module morphisms, the fact that Day tensor elements are determined by all bilinear evaluations and the evaluation of a mapped family for Day tensor products.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

theorem bangCofreeLiftOne_preserves_comult (C : Comonoid)
  (f : Hom C.carrier (representable 1)) :
  Hom.comp bangComult_one (bangCofreeLiftOne C f) =
  Hom.comp

```

```

      (DayTensor.map (bangCofreeLiftOne C f) (bangCofreeLiftOne C f))
      C.comult := by
let lift := bangCofreeLiftOne C f
let fac := bangCofreeFactorOne C f
have hfac : Hom.HasSum fac lift := bangCofreeLiftOne_hasSum_factors C f
apply Hom.ext
intro n x
apply dayTensor_ext
intro L b
have hsumL :=
  bangComultApp_hasSum 1 bangComultComponentsAdmissible_one n
  (lift.app n x) L b
have hfun :
  (fun pq : Nat x Nat =>
    DayCoend.evaluate L b
    ((bangComultComponent 1 pq.1 pq.2).app n (lift.app n x))) =
  (fun pq : Nat x Nat =>
    DayCoend.evaluate L b
    ((DayTensor.map (fac pq.1) (fac pq.2)).app n
    (C.comult.app n x))) := by
funext pq
have heq :=
  congrArg (fun ? : Hom C.carrier (dayTensor (bang 1) (bang 1)) =>
    ?.app n x)
  (bangComultComponent_comp_liftOne C f pq.1 pq.2)
simpa [Hom.comp_app] using congrArg (DayCoend.evaluate L b) heq
have hpt {m k : Nat} (u : (C.carrier.obj m).Carrier)
  (v : (C.carrier.obj k).Carrier) :
  (L.obj (m * k)).HasSum
  (fun pq : Nat x Nat =>
    b.app (fac pq.1 |>.app m u) (fac pq.2 |>.app k v))
  (b.app (lift.app m u) (lift.app k v)) := by
have hU := hfac m u
have hV := hfac k v
have hrows (p : Nat) :
  (L.obj (m * k)).HasSum
  (fun q : Nat => b.app (fac p |>.app m u) (fac q |>.app k v))
  (b.app (fac p |>.app m u) (lift.app k v)) :=
  b.map_sum_right (fac p |>.app m u) hV
have hcol :
  (L.obj (m * k)).HasSum
  (fun p : Nat => b.app (fac p |>.app m u) (lift.app k v))
  (b.app (lift.app m u) (lift.app k v)) :=
  b.map_sum_left (lift.app k v) hU
have hflat :=
  ((L.obj (m * k)).summation.flatten
  (fun p q => b.app (fac p |>.app m u) (fac q |>.app k v))
  (b.app (lift.app m u) (lift.app k v))).mpr
  <fun p => b.app (fac p |>.app m u) (lift.app k v),
  hrows, hcol>
exact
  ((L.obj (m * k)).summation.reindex (Equiv.sigmaEquivProd Nat Nat)
  (fun pq : Nat x Nat =>
    b.app (fac pq.1 |>.app m u) (fac pq.2 |>.app k v))
  (b.app (lift.app m u) (lift.app k v))).mp hflat
have hbs :

```

```

(L.obj n).HasSum
  (fun pq : Nat x Nat =>
    DayCoend.evaluate L b
      ((DayTensor.map (fac pq.1) (fac pq.2)).app n
        (C.comult.app n x)))
  (DayCoend.evaluate L b
    ((DayTensor.map lift lift).app n (C.comult.app n x))) := by
have hpre := DayCoend.evaluate_hasSum_bilinear
  (fun pq : Nat x Nat => Bilinear.precomp b (fac pq.1) (fac pq.2))
  (Bilinear.precomp b lift lift)
  (fun {m k} u v => hpt u v)
  (C.comult.app n x)
convert hpre using 1
* funext pq
  exact DayTensor.evaluate_map b (fac pq.1) (fac pq.2)
    (C.comult.app n x)
* exact DayTensor.evaluate_map b lift lift (C.comult.app n x)
have hsumL' :
  (L.obj n).HasSum
    (fun pq : Nat x Nat =>
      DayCoend.evaluate L b
        ((DayTensor.map (fac pq.1) (fac pq.2)).app n
          (C.comult.app n x)))
      (DayCoend.evaluate L b
        (bangComult_one.app n (lift.app n x))) := by
have h :
  bangComult_one.app n (lift.app n x) =
    bangComultApp 1 bangComultComponentsAdmissible_one n
      (lift.app n x) := rfl
rw [h]
convert hsumL using 1
exact hfun.symm
exact (L.obj n).summation.unique hsumL' hbs

```

#### 4.4.518 Definition of the exponential cofree lift one comonoid morphism

**Definition.** The exponential cofree lift one comonoid morphism of  $C$  and  $f$  is a comonoid morphism from  $C$  to  $\text{bangComonoid } 1$  (by decide).

**Construction.** Constructed by supplying each component: morphism, preserves counit and preserves comultiplication. The accompanying laws are verified from the definitions.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

noncomputable def bangCofreeLiftOneComonoidHom (C : Comonoid)
  (f : Hom C.carrier (representable 1)) :
  ComonoidHom C (bangComonoid 1 (by decide)) where
hom := bangCofreeLiftOne C f
preserves_counit := bangCofreeLiftOne_preserves_counit C f
preserves_comult := by
  change Hom.comp (bangComult_of_le_one 1 (by decide))
    (bangCofreeLiftOne C f) = _
  have h1 : bangComult_of_le_one 1 (by decide) = bangComult_one := rfl
  rw [h1]
  exact bangCofreeLiftOne_preserves_comult C f

```

```
/-! ## Uniqueness of the A=1 cofree lift -/
```

#### 4.4.519 Uniqueness of the A=1 cofree lift

**Definition.** ## Uniqueness of the A=1 cofree lift.

**Construction.** Constructed by supplying each component: application, functorial action zero, functorial action sum and naturality. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidCofree.lean](#)

```
noncomputable def bangOneCoeffHom (k : Nat) :
  Hom (bang 1) dayTensorUnit where
  app := fun n x => bangOneCoeff n k (x k)
  map_zero := by
    intro n
    dsimp only [bangOneCoeff]
    have hz : ((0 : ((bang 1).obj n).Carrier) k).val =
      (0 : Superoperator n (tensorPowerDimension 1 k)) := rfl
    rw [hz]
    exact (Superoperator.comp_ofEquivalence_finCongr
      (tensorPowerDimension_one_eq k)
      (0 : Superoperator n (tensorPowerDimension 1 k))).symm.trans
      (Superoperator.comp_zero_right _)
  map_sum := by
    intro ? _ n f s hf
    dsimp only [bangOneCoeff]
    have hk : SigmaMon.ChoiSum.HasSum
      (fun i => ((f i) k).val) (s k).val := hf k
    have hcast :=
      SigmaMon.ChoiSum.comp_left
      (Superoperator.ofEquivalence
        (finCongr (tensorPowerDimension_one_eq k))) hk
    have hfun :
      (fun i => (tensorPowerDimension_one_eq k) |> ((f i) k).val) =
      (fun i => Superoperator.comp
        (Superoperator.ofEquivalence
          (finCongr (tensorPowerDimension_one_eq k)))
          ((f i) k).val) := by
      funext i
      exact (Superoperator.comp_ofEquivalence_finCongr
        (tensorPowerDimension_one_eq k) ((f i) k).val).symm
    have hs :
      (tensorPowerDimension_one_eq k) |> (s k).val =
      Superoperator.comp
        (Superoperator.ofEquivalence
          (finCongr (tensorPowerDimension_one_eq k)))
        (s k).val :=
      (Superoperator.comp_ofEquivalence_finCongr
        (tensorPowerDimension_one_eq k) (s k).val).symm
    rw [hfun, hs]
    exact hcast
  naturality := by
    intro m n x phi
```

```

dsimp only [bangOneCoeff]
change
  (tensorPowerDimension_one_eq k) |>
    Superoperator.comp (x k).val phi =
      Superoperator.comp
        ((tensorPowerDimension_one_eq k) |> (x k).val) phi
have hx := Superoperator.comp_ofEquivalence_finCongr
  (tensorPowerDimension_one_eq k) (Superoperator.comp (x k).val phi)
have hy := congrArg (fun psi : Superoperator n 1 => Superoperator.comp psi phi)
  (Superoperator.comp_ofEquivalence_finCongr
    (tensorPowerDimension_one_eq k) (x k).val)
rw [ <- hx, <- hy, Superoperator.comp_assoc]

```

#### 4.4.520 The exponential one coefficient morphism of a composite of the representable to exponential is nonzero

**Statement.** For natural numbers  $a, k$ : if  $a \neq k$ , then the composite of the exponential one coefficient morphism of  $a$  after the representable to exponential of  $k$  at 1 equals 0.

**Proof.** Both sides are compared pointwise (by extensionality). The goal is simplified using the hypothesis that  $a \neq k$ , the definition of the exponential one coefficient, the extensionality for module morphisms and the composition of the map induced by an index equivalence of the finite index congruence for superoperators.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

theorem bangOneCoeffHom_comp_representableToBang_ne (a k : Nat) (hne : a != k) :
  Hom.comp (bangOneCoeffHom a) (representableToBang 1 k) = 0 := by
  apply Hom.ext
  intro n ?
  change bangOneCoeff n a
  ((if h : a = k then h.symm |>
    (symmetricPowerProjection 1 k).app n ? else 0)) = 0
  simp only [hne, reduceDItel]
  dsimp only [bangOneCoeff]
  exact (Superoperator.comp_ofEquivalence_finCongr
    (tensorPowerDimension_one_eq a)
    (0 : Superoperator n (tensorPowerDimension 1 a))).symm.trans
    (Superoperator.comp_zero_right _)

```

#### 4.4.521 The dereliction of a composite of the representable to exponential is nonzero

**Statement.** For a natural number  $k$ : if  $k \neq 1$ , then the composite of the dereliction at 1 after the representable to exponential of  $k$  at 1 equals 0.

**Proof.** Both sides are compared pointwise (by extensionality). The goal is simplified using the definition of the dereliction, the definition of the symmetric dereliction, the definition of the representable to exponential and the definition of the exponential injection.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

theorem bangDereliction_comp_representableToBang_ne (k : Nat) (hne : k != 1) :
  Hom.comp (bangDereliction 1) (representableToBang 1 k) = 0 := by

```

```

apply Hom.ext
intro n ?
dsimp [bangDereliction, symmetricDereliction, representableToBang,
  bangInjection, countableProductInjection, Hom.comp]
change Superoperator.comp
  (Superoperator.ofEquivalence
    (finCongr (tensorPowerDimension_one 1)))
  ((if h : (1 : Nat) = k then h.symm |>
    (symmetricPowerProjection 1 k).app n ? else 0)).val = 0
have hne' : not ((1 : Nat) = k) := fun h => hne h.symm
simp only [hne', reduceDite]
exact Superoperator.comp_zero_right _

```

#### 4.4.522 The functorial action composition zero left

**Statement.** For superoperator modules  $M, M', N, N'$ , a module morphism  $g$ : the functorial action of  $g$  at 0 equals 0.

**Proof.** The key step rewrites with the functorial action on an introduced element, the definition of the introduction and the fact that extensionality for maps out of a Day tensor: it is enough to check coend generators.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidCofree.lean](#)

```

theorem DayTensor.map_comp_zero_left {M M' N N' : Module}
  (g : Hom N N') :
  DayTensor.map (0 : Hom M M') g = 0 := by
  apply DayTensor.hom_ext
  intro m n x y
  have hz : (0 : Hom M M').app m x = 0 := (0 : Hom M M').map_zero m
  simp only [DayTensor.map_intro]
  rw [hz, (DayCoend.intro M' N').map_zero_left]
  rfl

```

#### 4.4.523 The functorial action composition zero right

**Statement.** For superoperator modules  $M, M', N, N'$ , a module morphism  $f$ : the functorial action of  $f$  at 0 equals 0.

**Proof.** The key step rewrites with the functorial action on an introduced element, the definition of the introduction and the fact that extensionality for maps out of a Day tensor: it is enough to check coend generators.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidCofree.lean](#)

```

theorem DayTensor.map_comp_zero_right {M M' N N' : Module}
  (f : Hom M M') :
  DayTensor.map f (0 : Hom N N') = 0 := by
  apply DayTensor.hom_ext
  intro m n x y
  have hz : (0 : Hom N N').app n y = 0 := (0 : Hom N N').map_zero n
  simp only [DayTensor.map_intro]
  rw [hz, (DayCoend.intro M' N').map_zero_right]
  rfl

```



#### 4.4.524 The functorial action of the coefficient of the dereliction of a composite of the exponential comultiplication component is nonzero

**Statement.** For natural numbers  $k, p, q$ : if  $(p, q) \neq (k, 1)$ , then the composite of the functorial action of `bangOneCoeffHom k` and `bangDereliction 1` after the exponential comultiplication component of  $p$  and  $q$  at 1 equals 0.

**Proof.** Both sides are compared pointwise (by extensionality). The argument splits on the relevant condition. An equation between variables is used to substitute one for the other. The key step rewrites with the definition of the exponential comultiplication component, the functorial action composition zero right, the functorial action composition zero left and the transitivity for semantic equalities of circuits.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
theorem map_coeff_dereliction_comp_bangComultComponent_ne
  (k p q : Nat) (hne : (p, q) != (k, 1)) :
  Hom.comp
    (DayTensor.map (bangOneCoeffHom k) (bangDereliction 1))
    (bangComultComponent 1 p q) = 0 := by
  simp only [bangComultComponent]
  refine Eq.trans (by ext; rfl) ?_
  have hmap := DayTensor.map_comp (bangOneCoeffHom k) (representableToBang 1 p)
    (bangDereliction 1) (representableToBang 1 q)
  refine Eq.trans (congrArg (fun g => Hom.comp g
    (Hom.comp (bangSplitToRepDay 1 p q) (bangSplitComponent 1 p q))))
    hmap.symm) ?_
  by_cases hp : p = k
  * by_cases hq : q = 1
    * exact (hne (by subst hp; subst hq; rfl)).elim
    * have hz := bangDereliction_comp_representableToBang_ne q hq
      rw [hz, DayTensor.map_comp_zero_right]
      ext; rfl
  * have hz := bangOneCoeffHom_comp_representableToBang_ne k p (Ne.symm hp)
    rw [hz, DayTensor.map_comp_zero_left]
    ext; rfl
```

#### 4.4.525 Equality with rec of the cancel

**Statement.** If  $a = b$ , then the symmetry of  $\blacktriangleright$  and the Hadamard gate on wire  $x$  equals  $x$ .

**Proof.** The hypotheses are unpacked into their constituent data.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
private theorem eq_rec_cancel {a : Sort*} {a b : a} (h : a = b)
  {b : a -> Sort*} (x : b a) : h.symm |> (h |> x) = x := by
  cases h; rfl
```

#### 4.4.526 Formula for the exponential one coefficient of the val

**Statement.** For natural numbers  $k, n$ : the composite of the map induced by an index equivalence of `fin` `Congr (tensorPowerDimension_one_eq k) .symm` after the exponential one coefficient of  $n, k$ ,  $x$  equals the val of  $x$ .

**Proof.** The goal is simplified using the definition of the exponential one coefficient, the map induced by an index equivalence of a composite of the trace-preserving and the equality with rec of the cancel.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
theorem bangOneCoeff_val_eq {k n : Nat} (x : SymmetricElement 1 k n) :
  Superoperator.comp
    (Superoperator.ofEquivalence
      (finCongr (tensorPowerDimension_one_eq k).symm))
    (bangOneCoeff n k x) =
  x.val := by
  dsimp only [bangOneCoeff]
  refine (ofEquiv_comp_tpd (k := k)
    ((tensorPowerDimension_one_eq k) |> x.val)).trans ?_
  exact eq_rec_cancel (tensorPowerDimension_one_eq k) x.val
```

#### 4.4.527 Extensionality for the symmetric tensor of one

**Statement.** For natural numbers  $k, n$ : if  $\text{bangOneCoeff } n \ k \ x = \text{bangOneCoeff } n \ k \ y$ , then  $x = y$ .

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the hypothesis that  $\text{bangOneCoeff } n \ k \ x = \text{bangOneCoeff } n \ k \ y$  and the extensionality for symmetric tensors.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
theorem symmetricElement_one_ext {k n : Nat}
  (x y : SymmetricElement 1 k n)
  (h : bangOneCoeff n k x = bangOneCoeff n k y) : x = y := by
  apply SymmetricElement.ext
  have hx := bangOneCoeff_val_eq x
  have hy := bangOneCoeff_val_eq y
  rw [ <- hx, <- hy, h]
```

#### 4.4.528 Exponential one coefficient of the comonoid morphism of zero

**Statement.** For a comonoid  $C$ , a natural number  $n$ : the exponential one coefficient of  $n$  and  $(g.\text{hom}.\text{app } n \ x) \ 0$  at  $0$  equals the application of  $n$  and  $x$ .

**Proof.** The goal is simplified using the definition of the exponential one coefficient, the definition of the exponential comonoid, the components of the composition and the definition of the counit of the exponential.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
theorem bangOneCoeff_comonoidHom_zero (C : Comonoid)
  (g : ComonoidHom C (bangComonoid 1 (by decide))) (n : Nat)
  (x : (C.carrier.obj n).Carrier) :
  bangOneCoeff n 0 ((g.hom.app n x) 0) = C.counit.app n x := by
  have h? := congrArg (fun ? : Hom C.carrier dayTensorUnit => ?.app n x)
  g.preserves_counit
  simpa [bangOneCoeff, bangComonoid, Hom.comp_app, bangCounit,
    symmetricWeakening] using h?
```

#### 4.4.529 Exponential one coefficient of the comonoid morphism of one

**Statement.** For a comonoid  $C$ , a natural number  $n$ : the exponential one coefficient of  $n$  and  $(g.\text{hom}.\text{app } n \ x) \ 1$  at  $1$  equals  $(\text{bangCofreeForgetComonoid } 1 \ (\text{by decide}) \ C \ g).\text{app } n \ x$ .

**Proof.** The key step rewrites with the composition of the map induced by an index equivalence of the finite index congruence for superoperators.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
theorem bangOneCoeff_comonoidHom_one (C : Comonoid)
  (g : ComonoidHom C (bangComonoid 1 (by decide))) (n : Nat)
  (x : (C.carrier.obj n).Carrier) :
  bangOneCoeff n 1 ((g.hom.app n x) 1) =
    (bangCofreeForgetComonoid 1 (by decide) C g).app n x := by
have hEq :
  finCongr (tensorPowerDimension_one 1) =
    finCongr (tensorPowerDimension_one_eq 1) := by
congr 1
change bangOneCoeff n 1 ((g.hom.app n x) 1) =
  Superoperator.comp
    (Superoperator.ofEquivalence
      (finCongr (tensorPowerDimension_one 1)))
      ((g.hom.app n x) 1).val
rw [hEq]
exact (Superoperator.comp_ofEquivalence_finCongr
  (tensorPowerDimension_one_eq 1) ((g.hom.app n x) 1).val).symm
```

#### 4.4.530 Exponential one coefficient morphism of a composite of the factor

**Statement.** For a natural number  $k$ : the composite of the exponential one coefficient morphism of  $k$  after the composite of  $\text{representableToBang } 1 \ k$  after  $\text{bangOneCast } k$  equals the identity of the Day tensor unit.

**Proof.** Both sides are compared pointwise (by extensionality). It follows from the extensionality for module morphisms and the exponential one coefficient of the representable to exponential of a transport along an equality.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
theorem bangOneCoeffHom_comp_factor (k : Nat) :
  Hom.comp (bangOneCoeffHom k)
    (Hom.comp (representableToBang 1 k) (bangOneCast k)) =
    Hom.id dayTensorUnit := by
  apply Hom.ext
  intro n ?
  exact bangOneCoeff_repToBang_cast k n ?
```

#### 4.4.531 Dereliction of a composite of the factor

**Statement.** The composite of the dereliction at  $1$  after the composite of  $\text{representableToBang } 1 \ 1$  after  $\text{bangOneCast } 1$  equals the identity of the representable module at  $1$ .

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the composition of the map induced by an index equivalence of the finite index congruence for superoperators, the extensionality for module morphisms and the exponential one coefficient of the representable to exponential of a transport along an equality.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
theorem bangDereliction_comp_factor :
  Hom.comp (bangDereliction 1)
    (Hom.comp (representableToBang 1 1) (bangOneCast 1)) =
    Hom.id (representable 1) := by
  apply Hom.ext
  intro n ?
  change Superoperator.comp
    (Superoperator.ofEquivalence
      (finCongr (tensorPowerDimension_one 1)))
    (((representableToBang 1 1).app n ((bangOneCast 1).app n ?)) 1).val = ?
  have hfin :
    finCongr (tensorPowerDimension_one 1) =
      finCongr (tensorPowerDimension_one_eq 1) :=
    congrArg finCongr (Subsingleton.elim _ _)
  rw [hfin, Superoperator.comp_ofEquivalence_finCongr]
  exact bangOneCoeff_repToBang_cast 1 n ?
```

#### 4.4.532 Functorial action of the coefficient of the dereliction of a composite of the comultiplication of the exponential

**Statement.**  $(\text{coeff\_k} \otimes \text{dereliction}) \circ \Delta_{\text{bang}} = \lambda^{-1} \circ \text{coeff\_}\{k+1\}$  on  $\text{bang } 1$ .

**Proof.** Both sides are compared pointwise (by extensionality). The argument splits on the relevant condition. An equation between variables is used to substitute one for the other. The key step rewrites with the fact that the functorial action of the coefficient of the dereliction of a composite of the exponential comultiplication component is nonzero, the components of the zero, the exponential one coefficient morphism of a composite of the factor and the dereliction of a composite of the factor.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
theorem map_coeff_dereliction_comp_bangComult (k : Nat) :
  Hom.comp
    (DayTensor.map (bangOneCoeffHom k) (bangDereliction 1))
    bangComult_one =
  Hom.comp (DayTensor.leftUnitorInv dayTensorUnit)
    (bangOneCoeffHom (k + 1)) := by
  have hsum :
    Hom.HasSum
      (fun pq : Nat x Nat => bangComultComponent 1 pq.1 pq.2)
      bangComult_one :=
    fun n x => bangComult_hasSum_components n x
  have hL := Hom.hasSum_comp_left
    (DayTensor.map (bangOneCoeffHom k) (bangDereliction 1)) hsum
  have hfun :
    (fun pq : Nat x Nat =>
      Hom.comp
        (DayTensor.map (bangOneCoeffHom k) (bangDereliction 1))
```

```

      (bangComultComponent 1 pq.1 pq.2)) =
    fun pq : Nat x Nat =>
      if pq = (k, 1) then
        Hom.comp
          (DayTensor.map (bangOneCoeffHom k) (bangDereliction 1))
          (bangComultComponent 1 k 1)
      else 0 := by
    funext pq
    by_cases h : pq = (k, 1)
    * subst h; simp
    * rw [map_coeff_dereliction_comp_bangComultComponent_ne k pq.1 pq.2 h]
      simp [h]
  have hsingle :
    Hom.HasSum
      (fun pq : Nat x Nat =>
        if pq = (k, 1) then
          Hom.comp
            (DayTensor.map (bangOneCoeffHom k) (bangDereliction 1))
            (bangComultComponent 1 k 1)
          else 0)
      (Hom.comp
        (DayTensor.map (bangOneCoeffHom k) (bangDereliction 1))
        (bangComultComponent 1 k 1)) := by
  intro n x
  convert Fiber.hasSum_singleAt _
    (k, 1)
    ((Hom.comp
      (DayTensor.map (bangOneCoeffHom k) (bangDereliction 1))
      (bangComultComponent 1 k 1)).app n x) using 1
  funext i
  by_cases h : i = (k, 1)
  * simp [h]
  * simp [h, Hom.zero_app]
  have hL' :
    Hom.comp
      (DayTensor.map (bangOneCoeffHom k) (bangDereliction 1))
      bangComult_one =
    Hom.comp
      (DayTensor.map (bangOneCoeffHom k) (bangDereliction 1))
      (bangComultComponent 1 k 1) :=
    Hom.hasSum_unique (by rwa [hfun] at hL) hsingle
  rw [hL']
  have hcast := bangComultComponent_comp_cast k 1
  have hfactor := DayTensor.map_comp
    (bangOneCoeffHom k) (Hom.comp (representableToBang 1 k) (bangOneCast k))
    (bangDereliction 1) (Hom.comp (representableToBang 1 1) (bangOneCast 1))
  have hid :
    DayTensor.map
      (Hom.comp (bangOneCoeffHom k)
        (Hom.comp (representableToBang 1 k) (bangOneCast k)))
      (Hom.comp (bangDereliction 1)
        (Hom.comp (representableToBang 1 1) (bangOneCast 1))) =
    DayTensor.map (Hom.id dayTensorUnit) (Hom.id (representable 1)) := by
  rw [bangOneCoeffHom_comp_factor, bangDereliction_comp_factor]
  have hmapid : DayTensor.map (Hom.id dayTensorUnit) (Hom.id (representable 1)) =
    Hom.id (dayTensor dayTensorUnit (representable 1)) :=

```

```

DayTensor.map_id _ _
have hcancel :
  Hom.comp
    (DayTensor.map (bangOneCoeffHom k) (bangDereliction 1))
    (Hom.comp
      (DayTensor.map
        (Hom.comp (representableToBang 1 k) (bangOneCast k))
        (Hom.comp (representableToBang 1 1) (bangOneCast 1)))
      (DayTensor.leftUnitorInv dayTensorUnit)) =
    DayTensor.leftUnitorInv dayTensorUnit := by
-- associate: map comp (map' comp fun ^-1) = (map comp map') comp fun ^-1
refine Eq.trans (Hom.comp_assoc _ _ _) ?_
refine Eq.trans (congrArg (fun g => Hom.comp g
  (DayTensor.leftUnitorInv dayTensorUnit)) hfactor.symm) ?_
rw [hid, hmapid, Hom.id_comp]
apply Hom.ext
intro n x
have hslot :
  (bangComultComponent 1 k 1).app n x =
  (bangComultComponent 1 k 1).app n
  ((representableToBang 1 (k + 1)).app n
    (bangOneCast (k + 1)).app n
    (bangOneCoeff n (k + 1) (x (k + 1))))) := by
apply dayTensor_ext
intro L b
rw [bangComultComponent_evaluate_one, bangComultComponent_evaluate_one,
  bangOneCoeff_repToBang_cast]
-- map comp component comp (rep comp cast) = fun ^-1
have hpath :
  Hom.comp
    (DayTensor.map (bangOneCoeffHom k) (bangDereliction 1))
    (Hom.comp (bangComultComponent 1 k 1)
      (Hom.comp (representableToBang 1 (k + 1)) (bangOneCast (k + 1)))) =
    DayTensor.leftUnitorInv dayTensorUnit :=
  (congrArg (Hom.comp
    (DayTensor.map (bangOneCoeffHom k) (bangDereliction 1))) hcast).trans
    hcancel
have happ := congrArg
  (fun ? : Hom (representable 1)
    (dayTensor dayTensorUnit (representable 1)) =>
    ?.app n (bangOneCoeff n (k + 1) (x (k + 1))))) hpath
-- Reduce both sides at x via the (k+1)-slot factorization
change
  (DayTensor.map (bangOneCoeffHom k) (bangDereliction 1)).app n
  ((bangComultComponent 1 k 1).app n x) =
  (DayTensor.leftUnitorInv dayTensorUnit).app n
  ((bangOneCoeffHom (k + 1)).app n x)
rw [hslot]
-- Match happ's nested Hom.comp shape
change
  (Hom.comp
    (DayTensor.map (bangOneCoeffHom k) (bangDereliction 1))
    (Hom.comp (bangComultComponent 1 k 1)
      (Hom.comp (representableToBang 1 (k + 1)) (bangOneCast (k + 1)))))
    .app n
    (bangOneCoeff n (k + 1) (x (k + 1))) =
  (DayTensor.leftUnitorInv dayTensorUnit).app n

```

```

      (bangOneCoeff n (k + 1) (x (k + 1)))
exact happ

```

#### 4.4.533 Exponential one coefficient of the comonoid morphism

**Statement.** For a comonoid  $C$ , natural numbers  $k, n$ : the exponential one coefficient of  $n, k$ ,  $(g.\text{hom}.\text{app } n \ x) \ k$  equals an explicit expression in the exponential cofree coefficient one and the exponential cofree forget comonoid.

**Proof.** By induction on the natural number  $k$ . For zero, the claim is checked directly; for a successor, the claim follows from the induction hypothesis. The key step rewrites with the components of the composition, the exponential one coefficient of the comonoid morphism of zero, the transitivity for semantic equalities of circuits and the fact that composition for module morphisms is associative.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidCofree.lean](#)

```

theorem bangOneCoeff_comonoidHom (C : Comonoid)
  (g : ComonoidHom C (bangComonoid 1 (by decide))) (k n : Nat)
  (x : (C.carrier.obj n).Carrier) :
  bangOneCoeff n k ((g.hom.app n x) k) =
    (bangCofreeCoeffOne C
      (bangCofreeForgetComonoid 1 (by decide) C g) k).app n x := by
let f := bangCofreeForgetComonoid 1 (by decide) C g
induction k generalizing n x with
| zero => exact bangOneCoeff_comonoidHom_zero C g n x
| succ k ih =>
  have hphi :
    bangCofreeCoeffOne C f (k + 1) =
      Hom.comp (DayTensor.leftUnitor dayTensorUnit)
        (Hom.comp (DayTensor.map (bangCofreeCoeffOne C f k) f)
          C.comult) := rfl
  -- (map(coeff,der) comp bangComult) comp g = (fun ^-1 comp coeffHom(k+1))
  comp g
  have hsucc :
    Hom.comp
      (Hom.comp
        (DayTensor.map (bangOneCoeffHom k) (bangDereliction 1))
        bangComult_one)
      g.hom =
    Hom.comp
      (Hom.comp (DayTensor.leftUnitorInv dayTensorUnit)
        (bangOneCoeffHom (k + 1)))
      g.hom :=
    congrArg (fun ? => Hom.comp ? g.hom)
      (map_coeff_dereliction_comp_bangComult k)
  -- bangComult comp g = map(g,g) comp Delta
  have hpres :
    Hom.comp bangComult_one g.hom =
      Hom.comp (DayTensor.map g.hom g.hom) C.comult := by
    change Hom.comp (bangComonoid 1 (by decide)).comult g.hom = _
    exact g.preserves_comult
  have hreassoc :
    Hom.comp
      (DayTensor.map (bangOneCoeffHom k) (bangDereliction 1))

```

```

      (DayTensor.map g.hom g.hom) =
    DayTensor.map
      (Hom.comp (bangOneCoeffHom k) g.hom)
      (Hom.comp (bangDereliction 1) g.hom) :=
    (DayTensor.map_comp (bangOneCoeffHom k) g.hom
      (bangDereliction 1) g.hom).symm
-- Pointwise: fun ^-1 (coeffHom(k+1) (g x)) = map(coeff comp g, der comp g) (Delta
x)
have hL :
  (DayTensor.leftUnitorInv dayTensorUnit).app n
    (bangOneCoeff n (k + 1) ((g.hom.app n x) (k + 1))) =
  (DayTensor.map
    (Hom.comp (bangOneCoeffHom k) g.hom)
    (Hom.comp (bangDereliction 1) g.hom)).app n
    (C.comult.app n x) := by
have hchain :
  Hom.comp
    (Hom.comp (DayTensor.leftUnitorInv dayTensorUnit)
      (bangOneCoeffHom (k + 1)))
    g.hom =
  Hom.comp
    (DayTensor.map
      (Hom.comp (bangOneCoeffHom k) g.hom)
      (Hom.comp (bangDereliction 1) g.hom))
    C.comult := by
-- start from hsucc RHS = LHS of hsucc
refine Eq.trans hsucc.symm ?_
-- map comp bangComult comp g -> map comp (map(g,g) comp Delta)
refine Eq.trans (by
  change Hom.comp
    (Hom.comp
      (DayTensor.map (bangOneCoeffHom k) (bangDereliction 1))
      bangComult_one)
    g.hom =
  Hom.comp
    (DayTensor.map (bangOneCoeffHom k) (bangDereliction 1))
    (Hom.comp bangComult_one g.hom)
  exact (Hom.comp_assoc _ _ _).symm) ?_
refine Eq.trans (congrArg
  (Hom.comp (DayTensor.map (bangOneCoeffHom k) (bangDereliction 1)))
  hpres) ?_
-- map comp (map(g,g) comp Delta) = (map comp map(g,g)) comp Delta
refine Eq.trans (Hom.comp_assoc _ _ _) ?_
exact congrArg (fun ? => Hom.comp ? C.comult) hreassoc
exact congrArg
  (fun ? : Hom C.carrier
    (dayTensor dayTensorUnit (representable 1)) => ?.app n x)
  hchain
-- cancel fun ^-1 by applying fun
have hL2 :
  bangOneCoeff n (k + 1) ((g.hom.app n x) (k + 1)) =
  (DayTensor.leftUnitor dayTensorUnit).app n
  ((DayTensor.map
    (Hom.comp (bangOneCoeffHom k) g.hom)
    (Hom.comp (bangDereliction 1) g.hom)).app n
    (C.comult.app n x)) := by

```



```

have hLU := congrArg
  (fun z => (DayTensor.leftUnitor dayTensorUnit).app n z) hL
refine Eq.trans ?_ hLU
let c : (dayTensorUnit.obj n).Carrier :=
  bangOneCoeff n (k + 1) ((g.hom.app n x) (k + 1))
have h := congrArg (fun ? : Hom dayTensorUnit dayTensorUnit => ?.app n c)
  (DayTensor.leftUnitor_hom_inv dayTensorUnit)
exact
  ((Hom.id_app dayTensorUnit n c).symm).trans
    (h.symm.trans
      (Hom.comp_app (DayTensor.leftUnitor dayTensorUnit)
        (DayTensor.leftUnitorInv dayTensorUnit) n c))
refine Eq.trans hL2 ?_
rw [hphi]
have hpsi : Hom.comp (bangOneCoeffHom k) g.hom =
  bangCofreeCoeffOne C f k := by
  apply Hom.ext
  intro m y
  exact ih m y
have h? : Hom.comp (bangDereliction 1) g.hom = f := rfl
simp only [Hom.comp_app, hpsi, h?]
rfl

```

#### 4.4.534 Uniqueness of the exponential cofree lift one

**Statement.** For a comonoid  $C$ :  $g$  equals the exponential cofree lift one comonoid morphism of  $C$  and  $\text{bangCofreeForgetComonoid } 1$  (by decide)  $C$   $g$ .

**Proof.** Both sides are compared pointwise (by extensionality). It follows from the extensionality for comonoid morphisms, the extensionality for module morphisms, the extensionality for the symmetric tensor of one and the exponential one coefficient of the comonoid morphism.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidCofree.lean](#)

```

theorem bangCofreeLiftOne_unique (C : Comonoid)
  (g : ComonoidHom C (bangComonoid 1 (by decide))) :
  g = bangCofreeLiftOneComonoidHom C
    (bangCofreeForgetComonoid 1 (by decide) C g) := by
  apply ComonoidHom.ext
  apply Hom.ext
  intro n x
  funext k
  apply symmetricElement_one_ext
  exact (bangOneCoeff_comonoidHom C g k n x).trans
    (bangOneCoeff_liftOne C _ k n x).symm

```

#### 4.4.535 Definition of the exponential cofree equivalence of one

**Definition.** The exponential cofree equivalence one of  $C$  is a module morphism.

**Construction.** Constructed by supplying each component: passage to fun and inverse fun. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidCofree.lean](#)

```

noncomputable def bangCofreeEquiv_one (C : Comonoid) :
  Hom C.carrier (representable 1) ?
  ComonoidHom C (bangComonoid 1 (by decide)) where
toFun := bangCofreeLiftOneComonoidHom C
invFun := bangCofreeForgetComonoid 1 (by decide) C
left_inv f := bangCofreeLiftOne_forget C f
right_inv g := (bangCofreeLiftOne_unique C g).symm

```

#### 4.4.536 Definition of the comonoid morphism equivalence of one

**Definition.** The comonoid morphism equivalence one of C is introduced by the definition below.

**Construction.** Defined to be the exponential cofree equivalence one of C.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidCofree.lean](#)

```

noncomputable def comonoidHomEquiv_one (C : Comonoid) :=
  bangCofreeEquiv_one C

```

#### 4.4.537 Definition of the exponential cofree lift, when it is at most one

**Definition.** The exponential cofree lift of order one of A, C and f is a comonoid morphism from C to bang Comonoid A hA.

**Construction.** Defined by an explicit formula built from the substitution, the exponential cofree lift zero comonoid morphism and the exponential cofree lift one comonoid morphism.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidCofree.lean](#)

```

noncomputable def bangCofreeLift_of_le_one (A : Nat) (hA : A <= 1)
  (C : Comonoid) (f : Hom C.carrier (representable A)) :
  ComonoidHom C (bangComonoid A hA) :=
if h : A = 0 then by
  subst h
  exact bangCofreeLiftZeroComonoidHom C
else by
  have h1 : A = 1 := by omega
  subst h1
  exact bangCofreeLiftOneComonoidHom C f

```

#### 4.4.538 Exponential cofree lift, when it is at most the one of the forget

**Statement.** For a natural number A, a comonoid C, a module morphism f: if  $A \leq 1$ , then  $\text{bangCofreeForgetComonoid } A \text{ hA } C (\text{bangCofreeLift\_of\_le\_one } A \text{ hA } C \text{ f}) = f$ .

**Proof.** The argument splits on the relevant condition. An equation between variables is used to substitute one for the other. It follows from the definition of the exponential cofree lift of order one, the morphism to representable module zero uniqueness and the exponential cofree lift one of the forget.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidCofree.lean](#)

```

theorem bangCofreeLift_of_le_one_forget (A : Nat) (hA : A <= 1)
  (C : Comonoid) (f : Hom C.carrier (representable A)) :
  bangCofreeForgetComonoid A hA C (bangCofreeLift_of_le_one A hA C f) = f := by
  unfold bangCofreeLift_of_le_one
  split_ifs with h
  * subst h
  exact hom_to_representable_zero_unique _ _ _
  * have h1 : A = 1 := by omega
  subst h1
  exact bangCofreeLiftOne_forget C f

```

#### 4.4.539 Exponential cofree lift, when it is at most the one of the uniqueness

**Statement.** For a natural number  $A$ , a comonoid  $C$ : if  $A \leq 1$ , then  $g = \text{bangCofreeLift\_of\_le\_one } A \text{ hA } C (\text{bangCofreeForgetComonoid } A \text{ hA } C g)$ .

**Proof.** The argument splits on the relevant condition. An equation between variables is used to substitute one for the other. It follows from the definition of the exponential cofree lift of order one, the uniqueness of the exponential cofree lift zero and the uniqueness of the exponential cofree lift one.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

theorem bangCofreeLift_of_le_one_unique (A : Nat) (hA : A <= 1)
  (C : Comonoid) (g : ComonoidHom C (bangComonoid A hA)) :
  g = bangCofreeLift_of_le_one A hA C
    (bangCofreeForgetComonoid A hA C g) := by
  unfold bangCofreeLift_of_le_one
  split_ifs with h
  * subst h
  exact bangCofreeLiftZero_unique C g
  * have h1 : A = 1 := by omega
  subst h1
  exact bangCofreeLiftOne_unique C g

```

#### 4.4.540 Definition of the exponential cofree equivalence, when it is at most one

**Definition.** The exponential cofree equivalence of order one of  $A$  and  $C$  is a module morphism.

**Construction.** Constructed by supplying each component: passage to fun, inverse fun and left inverse. The accompanying laws are verified from the definitions.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

noncomputable def bangCofreeEquiv_of_le_one (A : Nat) (hA : A <= 1)
  (C : Comonoid) :
  Hom C.carrier (representable A) ?
  ComonoidHom C (bangComonoid A hA) where
  toFun := bangCofreeLift_of_le_one A hA C
  invFun := bangCofreeForgetComonoid A hA C
  left_inv := bangCofreeLift_of_le_one_forget A hA C
  right_inv g := (bangCofreeLift_of_le_one_unique A hA C g).symm

/-! ## Cofree co-Kleisli / bang comonad interface (`A <= 1`)

```

The cofree UP ``bangCofreeEquiv_of_le_one`` induces the standard co-Kleisli promotion ``Hom(!B, A) -> Hom(!B, !A)`` and the functorial action of bang on maps between representables. Counit of the comonad is dereliction; the comonoid counit/comult are ``bangCounit`` / ``bangComult_of_le_one``. Digging ``!A -> !!A`` is not packaged here: ``bang`` is indexed by dimension ``Nat``, not by arbitrary modules. Comonad/co-Kleisli laws below are the ones that follow from the UP alone (standard cofree diagrams).

-/

#### 4.4.541 Definition of the promotion

**Definition.** Co-Kleisli promotion via the cofree UP:  $\text{Hom}(!B, A) \rightarrow \text{ComonoidHom}(!B, !A)$  for  $A, B \leq 1$ .

**Construction.** Defined to be `bangCofreeLift_of_le_one A hA (bangComonoid B hB) f`.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
noncomputable def bangPromote {A B : Nat} (hA : A <= 1) (hB : B <= 1)
  (f : Hom (bang B) (representable A)) :
  ComonoidHom (bangComonoid B hB) (bangComonoid A hA) :=
  bangCofreeLift_of_le_one A hA (bangComonoid B hB) f
```

#### 4.4.542 Underlying module map of co-Kleisli promotion

**Definition.** Underlying module map of co-Kleisli promotion.

**Construction.** Defined to be `(bangPromote hA hB f).hom`.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
noncomputable def bangPromoteHom {A B : Nat} (hA : A <= 1) (hB : B <= 1)
  (f : Hom (bang B) (representable A)) :
  Hom (bang B) (bang A) :=
  (bangPromote hA hB f).hom
```

#### 4.4.543 Functorial action of bang on maps of representables ( $A, B \leq 1$ )

**Definition.** Functorial action of bang on maps of representables ( $A, B \leq 1$ ).

**Construction.** Defined to be the exponential promotion morphism of  $hB, hA$ , the composite of  $f$  after `bangDereliction A`.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```
noncomputable def bangMap {A B : Nat} (hA : A <= 1) (hB : B <= 1)
  (f : Hom (representable A) (representable B)) :
  Hom (bang A) (bang B) :=
  bangPromoteHom hB hA (Hom.comp f (bangDereliction A))
```

#### 4.4.544 Comonoid morphism induced by a map of representables

**Definition.** Comonoid morphism induced by a map of representables.

**Construction.** Defined to be the promotion of  $hB$ ,  $hA$ , the composite of  $f$  after  $\text{bangDereliction}$   $A$ .

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidCofree.lean](#)

```
noncomputable def bangMapComonoidHom {A B : Nat} (hA : A <= 1) (hB : B <= 1)
  (f : Hom (representable A) (representable B)) :
  ComonoidHom (bangComonoid A hA) (bangComonoid B hB) :=
  bangPromote hB hA (Hom.comp f (bangDereliction A))
```

#### 4.4.545 Comonad counit: dereliction $!A \rightarrow y(A)$

**Definition.** Comonad counit: dereliction  $!A \rightarrow y(A)$ .

**Construction.** Defined to be the dereliction of  $A$ .

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidCofree.lean](#)

```
noncomputable abbrev bangComonadCounit (A : Nat) : Hom (bang A) (representable A) :=
  bangDereliction A
```

#### 4.4.546 Comonoid counit / weakening $!A \rightarrow I(\text{Day tensor unit})$

**Definition.** Comonoid counit / weakening  $!A \rightarrow I(\text{Day tensor unit})$ .

**Construction.** Defined to be the counit of the exponential of  $A$ .

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidCofree.lean](#)

```
noncomputable abbrev bangComonadWeakening (A : Nat) : Hom (bang A) dayTensorUnit :=
  bangCounit A
```

#### 4.4.547 Comonoid comultiplication $!A \rightarrow !A \otimes !A$ for $A \leq 1$

**Definition.** Comonoid comultiplication  $!A \rightarrow !A \otimes !A$  for  $A \leq 1$ .

**Construction.** Defined to be the exponential comultiplication of order one of  $A$  and  $hA$ .

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidCofree.lean](#)

```
noncomputable abbrev bangComonadComult (A : Nat) (hA : A <= 1) :
  Hom (bang A) (dayTensor (bang A) (bang A)) :=
  bangComult_of_le_one A hA
```

#### 4.4.548 UP left inverse: dereliction after promotion recovers the generator

**Statement.** UP left inverse: dereliction after promotion recovers the generator. Formally:  $\text{Hom.comp} (\text{bangDereliction } A) (\text{bangPromoteHom } hA \ hB \ f) = f$ .

**Proof.** This is an instance of the fact that exponential cofree lift, when it is at most the one of the forget, applied to the hypothesis that  $A \leq 1$ .

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidCofree.lean](#)

```
theorem bangPromote_dereliction {A B : Nat} (hA : A <= 1) (hB : B <= 1)
  (f : Hom (bang B) (representable A)) :
  Hom.comp (bangDereliction A) (bangPromoteHom hA hB f) = f :=
  bangCofreeLift_of_le_one_forget A hA (bangComonoid B hB) f
```

#### 4.4.549 UP right inverse on the identity comonoid endomorphism: promoting dereliction is the identity

**Statement.** UP right inverse on the identity comonoid endomorphism: promoting dereliction is the identity. Formally:  $\text{bangPromote } hA \ hA \ (\text{bangDereliction } A) = \text{ComonoidHom.id } (\text{bangComonoid } A \ hA)$ .

**Proof.** The key step rewrites with the definition of the exponential cofree forget comonoid, the definition of the exponential cofree forget, the identity of the morphism and the fact that observational equality is symmetric.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidCofree.lean](#)

```
theorem bangPromote_dereliction_id {A : Nat} (hA : A <= 1) :
  bangPromote hA hA (bangDereliction A) =
    ComonoidHom.id (bangComonoid A hA) := by
  have hforget :
    bangCofreeForgetComonoid A hA (bangComonoid A hA)
      (ComonoidHom.id (bangComonoid A hA)) =
      bangDereliction A := by
    simp [bangCofreeForgetComonoid, bangCofreeForget, ComonoidHom.id_hom]
  have h :=
    bangCofreeLift_of_le_one_unique A hA (bangComonoid A hA)
      (ComonoidHom.id (bangComonoid A hA))
  rw [hforget] at h
  exact h.symm
```

#### 4.4.550 Exponential promotion morphism of the dereliction of the identity

**Statement.** For a natural number  $A$ : if  $A \leq 1$ , then the exponential promotion morphism of  $hA$ ,  $hA$ , the dereliction of  $A$  equals the identity of the exponential modality of  $A$ .

**Proof.** This is an instance of congruence of function application, applied to the definition of the morphism.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidCofree.lean](#)

```
theorem bangPromoteHom_dereliction_id {A : Nat} (hA : A <= 1) :
  bangPromoteHom hA hA (bangDereliction A) = Hom.id (bang A) :=
  congrArg ComonoidHom.hom (bangPromote_dereliction_id hA)
```

#### 4.4.551 Co-Kleisli associativity from uniqueness of cofree lifts

**Statement.** Co-Kleisli associativity from uniqueness of cofree lifts.

**Proof.** The key step rewrites with the definition of the exponential cofree forget comonoid, the definition of the exponential cofree forget, the composition of the morphism and the definition of the exponential promotion morphism.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidCofree.lean](#)

```
theorem bangPromote_comp {A B C : Nat} (hA : A ≤ 1) (hB : B ≤ 1) (hC : C ≤ 1)
  (g : Hom (bang B) (representable A))
  (f : Hom (bang C) (representable B)) :
  ComonoidHom.comp (bangPromote hA hB g) (bangPromote hB hC f) =
    bangPromote hA hC (Hom.comp g (bangPromoteHom hB hC f)) := by
  let phi := ComonoidHom.comp (bangPromote hA hB g) (bangPromote hB hC f)
  have hforget :
    bangCofreeForgetComonoid A hA (bangComonoid C hC) phi =
      Hom.comp g (bangPromoteHom hB hC f) := by
    simp only [phi, bangCofreeForgetComonoid, bangCofreeForget,
      ComonoidHom.comp_hom, bangPromoteHom]
  have hg := bangPromote_dereliction hA hB g
  simp only [bangPromoteHom] at hg
  rw [Hom.comp_assoc, hg]
  have h :=
    bangCofreeLift_of_le_one_unique A hA (bangComonoid C hC) phi
  rw [hforget] at h
  exact h
```

#### 4.4.552 The action of the exponential on morphisms preserves identities

**Statement.** For a natural number A: if  $A \leq 1$ , then the action of the exponential on morphisms of  $hA$ ,  $hA$ , the identity of `representable A` equals the identity of the exponential modality of A.

**Proof.** The goal is simplified using the definition of the action of the exponential on morphisms.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidCofree.lean](#)

```
theorem bangMap_id {A : Nat} (hA : A ≤ 1) :
  bangMap hA hA (Hom.id (representable A)) = Hom.id (bang A) := by
  simp [bangMap]
```

#### 4.4.553 Dereliction of the action of the exponential on morphisms

**Statement.** For natural numbers A, B, a module morphism f: if  $A \leq 1$  and  $B \leq 1$ , then the composite of the dereliction of B after the action of the exponential on morphisms of  $hA$ ,  $hB$ ,  $f$  equals the composite of  $f$  after the dereliction of A.

**Proof.** This is an instance of the `uP` left inverse: dereliction after promotion recovers the generator, applied to the hypothesis that  $B \leq 1$ , the hypothesis that  $A \leq 1$  and the definition of the composition.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidCofree.lean](#)

```

theorem bangDereliction_bangMap {A B : Nat} (hA : A <= 1) (hB : B <= 1)
  (f : Hom (representable A) (representable B)) :
  Hom.comp (bangDereliction B) (bangMap hA hB f) =
    Hom.comp f (bangDereliction A) :=
  bangPromote_dereliction hB hA (Hom.comp f (bangDereliction A))

```

#### 4.4.554 The action of the exponential on morphisms preserves composition

**Statement.** For natural numbers  $A, B, C$ , module morphisms  $g, f$ : if  $A \leq 1$ ;  $B \leq 1$ ; and  $C \leq 1$ , then the action of the exponential on morphisms of  $hA, hC$ , the composite of  $g$  after  $f$  equals the composite of the action of the exponential on morphisms of  $hB, hC, g$  after the action of the exponential on morphisms of  $hA, hB, f$ .

**Proof.** The key step rewrites with the definition of the action of the exponential on morphisms, the definition of the exponential promotion morphism, the fact that composition for module morphisms is associative and congruence of function application.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

theorem bangMap_comp {A B C : Nat} (hA : A <= 1) (hB : B <= 1) (hC : C <= 1)
  (g : Hom (representable B) (representable C))
  (f : Hom (representable A) (representable B)) :
  bangMap hA hC (Hom.comp g f) =
    Hom.comp (bangMap hB hC g) (bangMap hA hB f) := by
  dsimp only [bangMap]
  have hassoc :=
    congrArg ComonoidHom.hom
      (bangPromote_comp hC hB hA
        (Hom.comp g (bangDereliction B))
        (Hom.comp f (bangDereliction A)))
  have hgen :
    Hom.comp (Hom.comp g (bangDereliction B))
      (bangPromoteHom hB hA (Hom.comp f (bangDereliction A))) =
      Hom.comp (Hom.comp g f) (bangDereliction A) := by
    have hf := bangDereliction_bangMap hA hB f
    simp only [bangMap, bangPromoteHom] at hf |-
    rw [← Hom.comp_assoc, hf, Hom.comp_assoc]
  exact (congrArg (bangPromoteHom hC hA) hgen.symm).trans hassoc.symm

```

#### 4.4.555 Promoted maps preserve the Day comonoid counit (weakening)

**Statement.** Promoted maps preserve the Day comonoid counit (weakening). Formally:  $\text{Hom.comp} (\text{bangCounit } B) (\text{bangMap } hA \ hB \ f) = \text{bangCounit } A$ .

**Proof.** The proof term combines the facts named in it directly.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCofree.lean`

```

theorem bangMap_preserves_counit {A B : Nat} (hA : A <= 1) (hB : B <= 1)
  (f : Hom (representable A) (representable B)) :
  Hom.comp (bangCounit B) (bangMap hA hB f) = bangCounit A :=
  (bangMapComonoidHom hA hB f).preserves_counit

```



#### 4.4.556 Promoted maps preserve Day comultiplication

**Statement.** Promoted maps preserve Day comultiplication.

**Proof.** The proof term combines the facts named in it directly.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidCofree.lean](#)

```
theorem bangMap_preserves_comult {A B : Nat} (hA : A <= 1) (hB : B <= 1)
  (f : Hom (representable A) (representable B)) :
  Hom.comp (bangComult_of_le_one B hB) (bangMap hA hB f) =
  Hom.comp (DayTensor.map (bangMap hA hB f) (bangMap hA hB f))
  (bangComult_of_le_one A hA) :=
  (bangMapComonoidHom hA hB f).preserves_comult
```

#### 4.4.557 The intended exponential carrier (symmetric formal power series)

**Definition.** The intended exponential carrier (symmetric formal power series).

**Construction.** Defined to be the symmetric formal power series of A.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidCore.lean](#)

```
noncomputable abbrev bang (A : Nat) : Module :=
  symmetricFormalPowerSeries A
```

#### 4.4.558 Fibers of exponential modality are unrestricted pointwise products, not finite-support formal series

**Statement.** Fibers of bang are unrestricted pointwise products, not finite-support formal series. Formally:  
(bang A).obj n).Carrier =  $\forall k, \text{SymmetricElement } A \ k \ n$ .

**Proof.** By definition. Unfolding the carrier turns the left-hand side, (bang A).obj n).Carrier, into the right-hand side,  $\forall k, \text{SymmetricElement } A \ k \ n$ ; the two sides are the same term.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidCore.lean](#)

```
theorem bang_obj_carrier (A n : Nat) :
  ((bang A).obj n).Carrier = forall k, SymmetricElement A k n :=
  rfl
```

#### 4.4.559 Canonical bilinear pairing of series into the coefficientwise formal square

**Definition.** Canonical bilinear pairing of series into the coefficientwise formal square.

**Construction.** Constructed by supplying each component: application, functorial action zero left, functorial action zero right, functorial action sum left, functorial action sum right and naturality. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidCore.lean](#)

```
noncomputable def symmetricSeriesDayBilinear (A : Nat) :
  Bilinear (bang A) (bang A) (symmetricFormalTensorSquare A) where
  app := fun {m n} x y p q =>
```

```

    Superoperator.tensor (x p).val (y q).val
map_zero_left := by
  intro m n y
  funext p q
  exact Superoperator.tensor_zero_left (y q).val
map_zero_right := by
  intro m n x
  funext p q
  exact Superoperator.tensor_zero_right (x p).val
map_sum_left := by
  intro ? _ m n x s y h p q
  exact SigmaMon.ChoiSum.tensor_hasSum_left (h p) (y q).val
map_sum_right := by
  intro ? _ m n x y s h p q
  exact SigmaMon.ChoiSum.tensor_hasSum_right (x p).val (h q)
naturality := by
  intro m' m n' n x y f g
  funext p q
  exact Superoperator.tensor_comp (x p).val f (y q).val g

```

#### 4.4.560 Comparison from the genuine Day tensor of series to the coefficientwise formal square

**Definition.** Comparison from the genuine Day tensor of series to the coefficientwise formal square.

**Construction.** Defined to be the lift of the symmetric series Day bilinear map of A.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidCore.lean](#)

```

noncomputable def symmetricSeriesDayCompare (A : Nat) :
  Hom (dayTensor (bang A) (bang A)) (symmetricFormalTensorSquare A) :=
  DayCoend.lift (symmetricSeriesDayBilinear A)

```

#### 4.4.561 The symmetric series Day compare on an introduced element

**Statement.** For natural numbers A, m, n: an explicit expression in the symmetric series Day compare, the introduction and the exponential modality equals `(symmetricSeriesDayBilinear A).app x y`.

**Proof.** This is an instance of the evaluation on an introduced element.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidCore.lean](#)

```

theorem symmetricSeriesDayCompare_intro (A : Nat) {m n : Nat}
  (x : ((bang A).obj m).Carrier) (y : ((bang A).obj n).Carrier) :
  (symmetricSeriesDayCompare A).app (m * n)
    ((DayCoend.intro (bang A) (bang A)).app x y) =
  (symmetricSeriesDayBilinear A).app x y :=
  DayCoend.evaluate_intro (symmetricSeriesDayBilinear A) x y

```

#### 4.4.562 The symmetric series Day compare of the postcomposition on an introduced element

**Statement.** For a natural number A: the postcomposition of the symmetric series Day compare of A and the introduction of `bang A` equals the symmetric series Day bilinear map of A.

**Proof.** Both sides are compared pointwise (by extensionality). It follows from the extensionality for bilinear maps and the symmetric series Day compare on an introduced element.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCore.lean`

```
theorem symmetricSeriesDayCompare_postcomp_intro (A : Nat) :
  Bilinear.postcomp (symmetricSeriesDayCompare A)
    (DayCoend.intro (bang A) (bang A)) =
    symmetricSeriesDayBilinear A := by
  apply Bilinear.ext
  intro m n x y
  exact symmetricSeriesDayCompare_intro A x y

/-! ## Obstruction witnesses -/
```

### 4.4.563 Block averaging on every homogeneous pair of the coefficientwise square

**Definition.** Block averaging on every homogeneous pair of the coefficientwise square.

**Construction.** Constructed by supplying each component: application, functorial action zero, functorial action sum and naturality. The accompanying laws are verified from the definitions.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCore.lean`

```
noncomputable def symmetricFormalSquareAverage (A : Nat) :
  Hom (symmetricFormalTensorSquare A)
    (symmetricFormalTensorSquare A) where
  app := fun _ x p q =>
    Superoperator.comp
      (Superoperator.tensor
        (symmetricAverage A p) (symmetricAverage A q))
      (x p q)
  map_zero := by
    intro n
    funext p q
    exact Superoperator.comp_zero_right _
  map_sum := by
    intro ? _ n f x h p q
    exact SigmaMon.ChoiSum.comp_left
      (Superoperator.tensor
        (symmetricAverage A p) (symmetricAverage A q))
      (h p q)
  naturality := by
    intro m n x f
    funext p q
    exact Superoperator.comp_assoc _ _ _
```

### 4.4.564 Averaging fixes every pure tensor of symmetric homogeneous coefficients

**Statement.** Averaging fixes every pure tensor of symmetric homogeneous coefficients. Thus the series bilinear factors through the symmetric projector on the ambient square.

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the fact that parallel composition is a bifunctor: it preserves sequential composition in both arguments, the average fixes every permutation-invariant coefficient and the extensionality for bilinear maps.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidCore.lean](#)

```
theorem symmetricFormalSquareAverage_fixes_series_bilinear (A : Nat) :
  Bilinear.postcomp (symmetricFormalSquareAverage A)
    (symmetricSeriesDayBilinear A) =
    symmetricSeriesDayBilinear A := by
  apply Bilinear.ext
  intro m n x y
  funext p q
  change
    Superoperator.comp
      (Superoperator.tensor
        (symmetricAverage A p) (symmetricAverage A q))
      (Superoperator.tensor (x p).val (y q).val) =
    Superoperator.tensor (x p).val (y q).val
  rw [ <- Superoperator.tensor_comp,
    SymmetricElement.average_val (x p),
    SymmetricElement.average_val (y q)]
```

#### 4.4.565 Gate-3 ambient obstruction (cf

**Statement.** Gate-3 ambient obstruction (cf. `choiIdentity_not_le_one`): the coefficientwise square is built from ambient representable tensor powers, which admit a nontrivial factor transposition when  $A > 1$ . Symmetric series coefficients are invariant under all such permutations, so the square is strictly ambient relative to the series Day tensor. Formally:  $\text{factorPermutationEquiv } A \ 2 \ (\text{Equiv.swap } 0 \ 1) \neq \text{Equiv.refl } (\text{Fin } (\text{tensorPowerDimension } A \ 2))$ .

**Proof.** The key step rewrites with standard identities for equivalences and standard identities for natural numbers.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidCore.lean](#)

```
theorem factorPermutationEquiv_swap_ne_refl
  (A : Nat) (hA : 1 < A) :
  factorPermutationEquiv A 2 (Equiv.swap (0 : Fin 2) 1) !=
  Equiv.refl (Fin (tensorPowerDimension A 2)) := by
  intro h
  let z0 : Fin A := <0, Nat.zero_lt_of_lt hA>
  let z1 : Fin A := <1, hA>
  let t : Fin 2 -> Fin A := ![z0, z1]
  have hfix : forall x, factorPermutationEquiv A 2 (Equiv.swap (0 : Fin 2) 1) x = x
    := by
    intro x
    rw [h]
    rfl
  -- The swap-equiv acts on packed tuples by precomposition with `swap`.
  have hact :
    factorPermutationEquiv A 2 (Equiv.swap (0 : Fin 2) 1)
      (tensorTupleEquiv A 2 t) =
    tensorTupleEquiv A 2 (t comp Equiv.swap (0 : Fin 2) 1) := by
```

```

change
  ((tensorTupleEquiv A 2).symm.trans
    ((Equiv.arrowCongr (Equiv.swap (0 : Fin 2) 1)
      (Equiv.refl (Fin A))).trans
      (tensorTupleEquiv A 2)))
    (tensorTupleEquiv A 2 t) =
  tensorTupleEquiv A 2 (t comp Equiv.swap (0 : Fin 2) 1)
rw [Equiv.trans_apply, Equiv.trans_apply, Equiv.symm_apply_apply]
-- `arrowCongr swap refl t = t comp swap`
rfl
have hpack :
  tensorTupleEquiv A 2 (t comp Equiv.swap (0 : Fin 2) 1) =
  tensorTupleEquiv A 2 t := by
  rw [ <- hact, hfix]
have ht := (tensorTupleEquiv A 2).injective hpack
have h01 := congrFun ht 0
-- LHS: `(t comp swap) 0 = t 1 = z1`; RHS: `t 0 = z0`.
change z1 = z0 at h01
exact (Nat.zero_ne_one (congrArg Fin.val h01.symm))

```

#### 4.4.566 Definition of the symmetric contraction Day factorization

**Definition.** Existence of a Day-valued comultiplication factoring the coefficientwise symmetric Contraction through `symmetricSeriesDayCompare`. Closed for  $A \leq 1$ .

**Construction.** Defined by an explicit formula built from the module morphism, the exponential modality, the Day tensor product and the composition.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidCore.lean`

```

def SymmetricContractionDayFactorization (A : Nat) : Prop :=
  exists ? : Hom (bang A) (dayTensor (bang A) (bang A)),
  Hom.comp (symmetricSeriesDayCompare A) ? = symmetricContraction A

```

#### 4.4.567 Definition of the symmetric series Day compare section

**Definition.** A section of the Day comparison would yield Day factorization of every map out of the square that is already defined on series pure tensors; no such section is constructed.

**Construction.** Defined by an explicit formula built from the module morphism, the symmetric formal tensor product square, the Day tensor product and the exponential modality.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidCore.lean`

```

def SymmetricSeriesDayCompareSection (A : Nat) : Prop :=
  exists s : Hom (symmetricFormalTensorSquare A)
    (dayTensor (bang A) (bang A)),
  Hom.comp (symmetricSeriesDayCompare A) s =
  Hom.id (symmetricFormalTensorSquare A)

```

#### 4.4.568 Counit: weakening into the Day tensor unit

**Definition.** Counit: weakening into the Day tensor unit.

**Construction.** Defined to be the symmetric weakening of A.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidCore.lean](#)

```
noncomputable def bangCounit (A : Nat) : Hom (bang A) dayTensorUnit :=
  symmetricWeakening A
```

#### 4.4.569 Dereliction as the degree-one projection to $\mathbb{Y}$ (A)

**Definition.** Dereliction as the degree-one projection to  $\mathbb{Y}$  (A).

**Construction.** Defined to be the symmetric dereliction of A.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidCore.lean](#)

```
noncomputable def bangDereliction (A : Nat) : Hom (bang A) (representable A) :=
  symmetricDereliction A
```

```
/-! ## Genuine Day comultiplication components -/
```

#### 4.4.570 Inclusion of a homogeneous symmetric degree into the series

**Definition.** Inclusion of a homogeneous symmetric degree into the series.

**Construction.** Defined to be the countable product injection of  $\text{fun } j \Rightarrow \text{symmetricPower } A$  j and k.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidCore.lean](#)

```
noncomputable def bangInjection (A k : Nat) :
  Hom (symmetricPower A k) (bang A) :=
  countableProductInjection (fun j => symmetricPower A j) k
```

#### 4.4.571 Projection of the series onto a homogeneous symmetric degree

**Definition.** Projection of the series onto a homogeneous symmetric degree.

**Construction.** Defined to be the countable product projection of  $\text{fun } j \Rightarrow \text{symmetricPower } A$  j and k.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidCore.lean](#)

```
noncomputable def bangProjection (A k : Nat) :
  Hom (bang A) (symmetricPower A k) :=
  countableProductProjection (fun j => symmetricPower A j) k
```

#### 4.4.572 Embed a representable tensor power into the series by averaging then injecting

**Definition.** Embed a representable tensor power into the series by averaging then injecting.

**Construction.** Defined to be the composite of the exponential injection of  $A$  and  $k$  after the symmetric power projection of  $A$  and  $k$ .

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidCore.lean`

```
noncomputable def representableToBang (A k : Nat) :  
  Hom (representable (tensorPowerDimension A k)) (bang A) :=  
  Hom.comp (bangInjection A k) (symmetricPowerProjection A k)
```

#### 4.4.573 Definition of the exponential split component

**Definition.** The  $(p, q)$  homogeneous split into the ambient representable  $y(\dim_p * \dim_q)$ .

**Construction.** Constructed by supplying each component: application, functorial action zero, functorial action sum and naturality. The accompanying laws are verified from the definitions.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidCore.lean`

```
noncomputable def bangSplitComponent (A p q : Nat) :  
  Hom (bang A)  
    (representable  
      (tensorPowerDimension A p * tensorPowerDimension A q)) where  
  app := fun _ x =>  
    Superoperator.comp  
      (Superoperator.ofEquivalence (tensorSplitEquiv A p q))  
      (x (p + q)).val  
  map_zero := fun _ => Superoperator.comp_zero_right _  
  map_sum := fun h =>  
    SigmaMon.ChoiSum.comp_left  
      (Superoperator.ofEquivalence (tensorSplitEquiv A p q))  
      (h (p + q))  
  naturality := fun _ _ => Superoperator.comp_assoc _ _ _
```

#### 4.4.574 Definition of the exponential split to representable Day

**Definition.** Representable Day inverse:  $y(\dim_p * \dim_q) \rightarrow \text{dayTensor}(y(\dim_p), y(\dim_q))$ .

**Construction.** Defined by an explicit formula built from the Day tensor product representable isomorphism and the dimension of a tensor power.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidCore.lean`

```
noncomputable def bangSplitToRepDay (A p q : Nat) :  
  Hom  
    (representable  
      (tensorPowerDimension A p * tensorPowerDimension A q))  
    (dayTensor  
      (representable (tensorPowerDimension A p))  
      (representable (tensorPowerDimension A q))) :=  
  (dayTensorRepresentableIso  
    (tensorPowerDimension A p) (tensorPowerDimension A q)).inv
```

#### 4.4.575 Definition of the exponential representable Day to series Day

**Definition.**  $\text{dayTensor}(y(\text{dim}_p), y(\text{dim}_q)) \rightarrow \text{dayTensor}(!A, !A)$ .

**Construction.** Defined to be the functorial action of the representable to exponential of  $A$  and  $p$  and the representable to exponential of  $A$  and  $q$ .

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidCore.lean](#)

```
noncomputable def bangRepDayToSeriesDay (A p q : Nat) :
  Hom
    (dayTensor
      (representable (tensorPowerDimension A p))
      (representable (tensorPowerDimension A q)))
    (dayTensor (bang A) (bang A)) :=
  DayTensor.map
    (representableToBang A p) (representableToBang A q)
```

#### 4.4.576 Homogeneous Day comultiplication component through the $(p, q)$ split

**Definition.** Homogeneous Day comultiplication component through the  $(p, q)$  split.

**Construction.** Defined to be the composite of the exponential representable Day to series Day of  $A, p, q$  after the composite of  $\text{bangSplitToRepDay } A \ p \ q$  after  $\text{bangSplitComponent } A \ p \ q$ .

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidCore.lean](#)

```
noncomputable def bangComultComponent (A p q : Nat) :
  Hom (bang A) (dayTensor (bang A) (bang A)) :=
  Hom.comp (bangRepDayToSeriesDay A p q)
    (Hom.comp (bangSplitToRepDay A p q) (bangSplitComponent A p q))
```

#### 4.4.577 Fiberwise family of Day comultiplication components

**Definition.** Fiberwise family of Day comultiplication components.

**Construction.** The map sending  $pq$  to  $(\text{bangComultComponent } A \ pq.1 \ pq.2).app \ n \ x$ .

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidCore.lean](#)

```
noncomputable def bangComultComponentFamily (A : Nat) (n : Nat)
  (x : ((bang A).obj n).Carrier) :
  Nat x Nat -> ((dayTensor (bang A) (bang A)).obj n).Carrier :=
  fun pq => (bangComultComponent A pq.1 pq.2).app n x
```

#### 4.4.578 Mixed-degree Day summability of homogeneous split components

**Definition.** Mixed-degree Day summability of homogeneous split components. Assembling  $\delta : \text{Hom}(!A) (\text{dayTensor} (!A) (!A))$  as the coend sum of  $\text{bangComultComponent}$  requires this obligation — the Day-form of the mixed-partition TNI gate recorded in `Exponential.lean`.

**Construction.** Defined by an explicit formula built from the exponential modality, the superoperator module, the bilinear map and the evaluation.



#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCore.lean`

```
def BangComultComponentsAdmissible (A : Nat) : Prop :=
  forall (n : Nat) (x : ((bang A).obj n).Carrier)
    (L : Module) (b : Bilinear (bang A) (bang A) L),
    exists z : (L.obj n).Carrier,
      (L.obj n).HasSum
        (fun pq : Nat x Nat =>
          DayCoend.evaluate L b
            (bangComultComponentFamily A n x pq))
        z
```

#### 4.4.579 Under mixed-degree admissibility, the fiberwise Day comultiplication is the coend sum of homogeneous split components

**Definition.** Under mixed-degree admissibility, the fiberwise Day comultiplication is the coend sum of homogeneous split components.

**Construction.** Defined to be the sum of admissibility of the exponential comultiplication component family of  $A, n, x$  and  $\text{fun } L \beta \Rightarrow h \ n \ x \ L \ \beta$ .

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCore.lean`

```
noncomputable def bangComultApp (A : Nat)
  (h : BangComultComponentsAdmissible A)
  (n : Nat) (x : ((bang A).obj n).Carrier) :
  ((dayTensor (bang A) (bang A)).obj n).Carrier :=
  DayCoend.sumOfAdmissible
    (bangComultComponentFamily A n x)
    (fun L b => h n x L b)
```

#### 4.4.580 Exponential comultiplication component of the evaluation

**Statement.** For natural numbers  $A, n$ , a superoperator module  $L$ : if  $\text{BangComultComponentsAdmissible } A$  and the family  $\text{fun } pq$  sums to  $z$ , then the evaluation of  $L, \beta, \text{bangComultApp } A \ h \ n \ x$  equals  $z$ .

**Proof.** This is an instance of the evaluation of the sum of admissibility for Day coends, applied to the hypothesis that the family  $\text{fun } pq$  sums to  $z$ .

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCore.lean`

```
theorem bangComultApp_evaluate (A : Nat)
  (h : BangComultComponentsAdmissible A)
  (n : Nat) (x : ((bang A).obj n).Carrier)
  (L : Module) (b : Bilinear (bang A) (bang A) L)
  (z : (L.obj n).Carrier)
  (hz : (L.obj n).HasSum
    (fun pq : Nat x Nat =>
      DayCoend.evaluate L b (bangComultComponentFamily A n x pq))
    z) :
  DayCoend.evaluate L b (bangComultApp A h n x) = z :=
  DayCoend.evaluate_sumOfAdmissible
    (bangComultComponentFamily A n x)
```

```
(fun L b => h n x L b) L b z hz
```

#### 4.4.581 Exponential comultiplication component family of zero

**Statement.** For natural numbers  $A, n$ :  $\text{bangComultComponentFamily } A \ n \ 0 \ pq = 0$ .

**Proof.** The proof term combines the facts named in it directly.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidCore.lean](#)

```
theorem bangComultComponentFamily_zero (A n : Nat) (pq : Nat x Nat) :
  bangComultComponentFamily A n 0 pq = 0 :=
  (bangComultComponent A pq.1 pq.2).map_zero n
```

#### 4.4.582 Under admissibility the fiberwise Day sum vanishes at zero

**Statement.** Under admissibility the fiberwise Day sum vanishes at zero. Formally:  $\text{bangComultApp } A \ h \ n \ 0 = 0$ .

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the exponential comultiplication component family of zero, the evaluation of zero for Day coends and the fact that the constantly-zero family has a sum over every countable index type.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidCore.lean](#)

```
theorem bangComultApp_zero (A : Nat)
  (h : BangComultComponentsAdmissible A) (n : Nat) :
  bangComultApp A h n 0 = 0 := by
  have hsum0 :
    DayCoend.HasSum (bangComultComponentFamily A n 0) 0 := by
    intro L b
    have hfun :
      (fun pq : Nat x Nat =>
        DayCoend.evaluate L b
          (bangComultComponentFamily A n 0 pq)) =
        fun _ => (0 : (L.obj n).Carrier) := by
      funext pq
      rw [bangComultComponentFamily_zero]
      exact DayCoend.evaluate_zero b
    rw [hfun, DayCoend.evaluate_zero b]
    exact Fiber.hasSum_zero (L.obj n) (? := Nat x Nat)
  have hsum :
    DayCoend.HasSum (bangComultComponentFamily A n 0)
      (bangComultApp A h n 0) := by
    intro L b
    have hz := hsum0 L b
    have hz0 :
      (L.obj n).HasSum
        (fun pq : Nat x Nat =>
          DayCoend.evaluate L b
            (bangComultComponentFamily A n 0 pq))
          (0 : (L.obj n).Carrier) := by
      rwa [DayCoend.evaluate_zero b] at hz
    have he :=
```

```

    bangComultApp_evaluate A h n 0 L b
      (0 : (L.obj n).Carrier) hz0
    exact he |> hz0
  exact ((dayTensor (bang A) (bang A)).obj n).summation.unique
    hsum hsum0

```

#### 4.4.583 The coend sum of homogeneous components under admissibility

**Statement.** The coend sum of homogeneous components under admissibility. Formally: `DayCoend.HasSum (bangComultComponentFamily A n x) (bangComultApp A h n x)`.

**Proof.** The hypotheses are unpacked into their constituent data.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidCore.lean`

```

theorem bangComultApp_hasSum (A : Nat)
  (h : BangComultComponentsAdmissible A)
  (n : Nat) (x : ((bang A).obj n).Carrier) :
  DayCoend.HasSum (bangComultComponentFamily A n x)
    (bangComultApp A h n x) := by
  intro L b
  obtain <z, hz> := h n x L b
  have he := bangComultApp_evaluate A h n x L b z hz
  exact he |> hz

```

#### 4.4.584 Each homogeneous component of coefficientwise contraction is the split used by exponential comultiplication component

**Statement.** Each homogeneous component of coefficientwise contraction is the split used by `bangComultComponent`. Formally: `(bangSplitComponent A p q).app n x = (symmetricContraction A).app n x p q`.

**Proof.** By definition: the left-hand side, `(bangSplitComponent A p q).app n x`, and the right-hand side, `(symmetricContraction A).app n x p q`, unfold to the same term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidCore.lean`

```

theorem bangSplitComponent_eq_contraction_slot (A p q n : Nat)
  (x : ((bang A).obj n).Carrier) :
  (bangSplitComponent A p q).app n x =
    (symmetricContraction A).app n x p q :=
  rfl

```

#### 4.4.585 Under mixed-degree admissibility

**Definition.** Under mixed-degree admissibility, the Day comultiplication is the coend sum of homogeneous split components, promoted to a module morphism.

**Construction.** Constructed by supplying each component: application, functorial action zero, functorial action sum and naturality. The accompanying laws are verified from the definitions.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidCore.lean`

```

noncomputable def bangComult (A : Nat)
  (h : BangComultComponentsAdmissible A) :
  Hom (bang A) (dayTensor (bang A) (bang A)) where
app := bangComultApp A h
map_zero := bangComultApp_zero A h
map_sum := by
  intro ? _ n f s hf L b
  let psi : ? -> Nat x Nat -> (L.obj n).Carrier := fun i pq =>
    DayCoend.evaluate L b (bangComultComponentFamily A n (f i) pq)
  have hrow (i : ?) :
    (L.obj n).HasSum (psi i)
    (DayCoend.evaluate L b (bangComultApp A h n (f i))) :=
    bangComultApp_hasSum A h n (f i) L b
  have hcol (pq : Nat x Nat) :
    (L.obj n).HasSum (fun i : ? => psi i pq)
    (DayCoend.evaluate L b
      (bangComultComponentFamily A n s pq)) := by
    have hc :=
      (DayCoend.lift b).map_sum
      ((bangComultComponent A pq.1 pq.2).map_sum hf)
    simpa [psi, bangComultComponentFamily, DayCoend.lift] using hc
  have hsumCol :
    (L.obj n).HasSum
      (fun pq : Nat x Nat =>
        DayCoend.evaluate L b
          (bangComultComponentFamily A n s pq))
      (DayCoend.evaluate L b (bangComultApp A h n s)) :=
    bangComultApp_hasSum A h n s L b
  have hflat :
    (L.obj n).HasSum
      (fun p : Sigma _ : Nat x Nat, ? => psi p.2 p.1)
      (DayCoend.evaluate L b (bangComultApp A h n s)) := by
    exact
      ((L.obj n).summation.flatten
        (fun pq i => psi i pq)
        (DayCoend.evaluate L b (bangComultApp A h n s))).mpr
      <fun pq =>
        DayCoend.evaluate L b
          (bangComultComponentFamily A n s pq),
        hcol, hsumCol>
  have hswap :
    (L.obj n).HasSum
      (fun p : Sigma _ : ?, Nat x Nat => psi p.1 p.2)
      (DayCoend.evaluate L b (bangComultApp A h n s)) := by
    exact
      ((L.obj n).summation.reindex
        (sigmaSwapEquiv ? (Nat x Nat))
        (fun p : Sigma _ : Nat x Nat, ? => psi p.2 p.1)
        (DayCoend.evaluate L b (bangComultApp A h n s))).mpr hflat
  obtain <g, hrows, hsumg> :=
    ((L.obj n).summation.flatten psi
      (DayCoend.evaluate L b (bangComultApp A h n s))).mp hswap
  have hg : g = fun i =>
    DayCoend.evaluate L b (bangComultApp A h n (f i)) := by
    funext i
    exact (L.obj n).summation.unique (hrows i) (hrow i)

```

```

rw [hg] at hsumg
exact hsumg
naturality := by
  intro m n x g
  have hleft :
    DayCoend.HasSum
      (bangComultComponentFamily A m
        ((bang A).act x g))
      (bangComultApp A h m ((bang A).act x g)) :=
    bangComultApp_hasSum A h m ((bang A).act x g)
  have hfam :
    bangComultComponentFamily A m ((bang A).act x g) =
      fun pq =>
        (dayTensor (bang A) (bang A)).act
          (bangComultComponentFamily A n x pq) g := by
  funext pq
  exact (bangComultComponent A pq.1 pq.2).naturality x g
have hright :
  DayCoend.HasSum
    (bangComultComponentFamily A m ((bang A).act x g))
    ((dayTensor (bang A) (bang A)).act
      (bangComultApp A h n x) g) := by
  intro L b
  rw [hfam]
  have hact :=
    L.act_sum_element g (bangComultApp_hasSum A h n x L b)
  convert hact using 1
  * funext i
    exact DayCoend.evaluate_action b
      (bangComultComponentFamily A n x i) g
  * exact DayCoend.evaluate_action b
    (bangComultApp A h n x) g
exact ((dayTensor (bang A) (bang A)).obj m).summation.unique
hleft hright

```

#### 4.4.586 Components of the comultiplication of the exponential

**Statement.** For natural numbers  $A, n$ : if `BangComultComponentsAdmissible A`, then  $(\text{bangComult } A \ h) . \text{app } n \ x = \text{bangComultApp } A \ h \ n \ x$ .

**Proof.** By definition: the left-hand side,  $(\text{bangComult } A \ h) . \text{app } n \ x$ , and the right-hand side,  $\text{bangComultApp } A \ h \ n \ x$ , unfold to the same term.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidCore.lean`

```

theorem bangComult_app (A : Nat)
  (h : BangComultComponentsAdmissible A)
  (n : Nat) (x : ((bang A).obj n).Carrier) :
  (bangComult A h).app n x = bangComultApp A h n x :=
  rfl

```

#### 4.4.587 Conditional Day comonoid package

**Definition.** Conditional Day comonoid package: requires `BangComultComponentsAdmissible` (to assemble `bangComult`) together with `SymmetricContractionDayFactorization` (compare `re-covers contraction`) and transport of coefficientwise counit/coassoc/cocomm laws.

**Construction.** Defined to be the exponential comultiplication components admissibility.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidCore.lean`

```
def BangDayComonoid (A : Nat) : Prop :=
  BangComultComponentsAdmissible A /\
  SymmetricContractionDayFactorization A
```

#### 4.4.588 The exponential modality Day comultiplication gate

**Statement.** Resume marker: the standard split-sum construction of Day comultiplication is exactly `BangComultComponentsAdmissible`.

**Proof.** Each component of the claim is established separately. The goal is simplified using the definition of the exponential comultiplication component family.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidCore.lean`

```
theorem bang_day_comult_gate (A : Nat) :
  BangComultComponentsAdmissible A <->
    forall (n : Nat) (x : ((bang A).obj n).Carrier)
      (L : Module) (b : Bilinear (bang A) (bang A) L),
      exists z : (L.obj n).Carrier,
        (L.obj n).HasSum
          (fun pq : Nat x Nat =>
            DayCoend.evaluate L b
              ((bangComultComponent A pq.1 pq.2).app n x))
          z := by
  constructor
  * intro h n x L b
    simp [bangComultComponentFamily] using h n x L b
  * intro h n x L b
    simp [bangComultComponentFamily] using h n x L b
```

#### 4.4.589 Day left-counit ingredients for $A \leq 1$

**Statement.** ## Day left-counit ingredients for  $A \leq 1$ . Formally: `Superoperator.ofEquivalence e = Superoperator.ofEquivalence f`.

**Proof.** Both sides are compared pointwise (by extensionality). It follows from the extensionality for bilinear maps and the fact that every index of a one-element `Fin` is zero.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidCounit.lean`

```
theorem ofEquivalence_dim_one {m n : Nat} (_hm : m = 1) (hn : n = 1)
  (e f : Fin m ? Fin n) :
  Superoperator.ofEquivalence e = Superoperator.ofEquivalence f := by
  congr 1
```

```

apply Equiv.ext
intro i
apply Fin.ext
exact (fin_val_eq_zero_of_card_one hn (e i)).trans
      (fin_val_eq_zero_of_card_one hn (f i)).symm

```

#### 4.4.590 Tensor left unitor of a composite of the split of one

**Statement.** For a natural number  $q$ : the composite of the tensor left unitor of `tensorPowerDimension 1 q` after the map induced by an index equivalence of `tensorSplitEquiv 1 0 q` equals the composite of the map induced by an index equivalence of `homogeneousLeftUnitorEquiv 1 q` after the map induced by an index equivalence of `tensorSplitEquiv 1 0 q`.

**Proof.** The key step rewrites with the fact that zero is a left unit for addition for finitely supported sums, the definition of the dimension of a tensor power, the fact that for  $A = 1$  every tensor-power dimension is 1 and the Day left-counit ingredients for  $A \leq 1$ .

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidCounit.lean`

```

theorem tensorLeftUnitor_comp_split_one (q : Nat) :
  Superoperator.comp
    (Superoperator.tensorLeftUnitor (tensorPowerDimension 1 q))
    (Superoperator.ofEquivalence (tensorSplitEquiv 1 0 q)) =
  Superoperator.comp
    (Superoperator.ofEquivalence (homogeneousLeftUnitorEquiv 1 q))
    (Superoperator.ofEquivalence (tensorSplitEquiv 1 0 q)) := by
  have hsrc : tensorPowerDimension 1 (0 + q) = 1 := by
    rw [Nat.zero_add]; exact tensorPowerDimension_one_eq q
  have htgt : tensorPowerDimension 1 q = 1 := tensorPowerDimension_one_eq q
  have hmid : tensorPowerDimension 1 0 * tensorPowerDimension 1 q = 1 := by
    simp [tensorPowerDimension]
  have hR :
    Superoperator.comp
      (Superoperator.ofEquivalence (homogeneousLeftUnitorEquiv 1 q))
      (Superoperator.ofEquivalence (tensorSplitEquiv 1 0 q)) =
    Superoperator.ofEquivalence
      ((tensorSplitEquiv 1 0 q).trans (homogeneousLeftUnitorEquiv 1 q)) :=
    Superoperator.ofEquivalence_comp _ _
  let eU : Fin (tensorPowerDimension 1 0 * tensorPowerDimension 1 q) ?
    Fin (tensorPowerDimension 1 q) :=
    finCongr (hmid.trans htgt.symm)
  have hU :
    Superoperator.tensorLeftUnitor (tensorPowerDimension 1 q) =
    Superoperator.ofEquivalence eU := by
  change Superoperator.ofEquivalence
    (Superoperator.tensorLeftUnitorEquiv (tensorPowerDimension 1 q)) =
    Superoperator.ofEquivalence eU
  refine ofEquivalence_dim_one (by simp) htgt _ _
  have hL :
    Superoperator.comp
      (Superoperator.tensorLeftUnitor (tensorPowerDimension 1 q))
      (Superoperator.ofEquivalence (tensorSplitEquiv 1 0 q)) =
    Superoperator.ofEquivalence ((tensorSplitEquiv 1 0 q).trans eU) := by
    rw [hU]

```

```

    exact Superoperator.ofEquivalence_comp (tensorSplitEquiv 1 0 q) eU
  rw [hL, hR]
  exact ofEquivalence_dim_one hsrc htgt _ _

```

#### 4.4.591 Tensor left unitor of a composite of the split of zero

**Statement.** The composite of the tensor left unitor of `tensorPowerDimension 0 0` after the map induced by an index equivalence of `tensorSplitEquiv 0 0 0` equals the composite of the map induced by an index equivalence of `homogeneousLeftUnitorEquiv 0 0` after the map induced by an index equivalence of `tensorSplitEquiv 0 0 0`.

**Proof.** The key step rewrites with the definition of the dimension of a tensor power, the Day left-counit ingredients for  $A \leq 1$  and the map induced by an index equivalence of a composite for superoperators.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidCounit.lean](#)

```

theorem tensorLeftUnitor_comp_split_zero :
  Superoperator.comp
    (Superoperator.tensorLeftUnitor (tensorPowerDimension 0 0))
    (Superoperator.ofEquivalence (tensorSplitEquiv 0 0 0)) =
  Superoperator.comp
    (Superoperator.ofEquivalence (homogeneousLeftUnitorEquiv 0 0))
    (Superoperator.ofEquivalence (tensorSplitEquiv 0 0 0)) := by
  have h1 : tensorPowerDimension 0 0 = 1 := rfl
  have hmid : tensorPowerDimension 0 0 * tensorPowerDimension 0 0 = 1 := by
    simp [tensorPowerDimension]
  have hR :
    Superoperator.comp
      (Superoperator.ofEquivalence (homogeneousLeftUnitorEquiv 0 0))
      (Superoperator.ofEquivalence (tensorSplitEquiv 0 0 0)) =
    Superoperator.ofEquivalence
      ((tensorSplitEquiv 0 0 0).trans (homogeneousLeftUnitorEquiv 0 0)) :=
    Superoperator.ofEquivalence_comp _ _
  let eU : Fin (tensorPowerDimension 0 0 * tensorPowerDimension 0 0) ?
    Fin (tensorPowerDimension 0 0) :=
    finCongr (hmid.trans h1.symm)
  have hU :
    Superoperator.tensorLeftUnitor (tensorPowerDimension 0 0) =
    Superoperator.ofEquivalence eU := by
  change Superoperator.ofEquivalence
    (Superoperator.tensorLeftUnitorEquiv (tensorPowerDimension 0 0)) =
    Superoperator.ofEquivalence eU
  exact ofEquivalence_dim_one (by simp) h1 _ _
  have hL :
    Superoperator.comp
      (Superoperator.tensorLeftUnitor (tensorPowerDimension 0 0))
      (Superoperator.ofEquivalence (tensorSplitEquiv 0 0 0)) =
    Superoperator.ofEquivalence ((tensorSplitEquiv 0 0 0).trans eU) := by
  rw [hU]
  exact Superoperator.ofEquivalence_comp (tensorSplitEquiv 0 0 0) eU
  rw [hL, hR]
  exact ofEquivalence_dim_one h1 h1 _ _

```



#### 4.4.592 Tensor left unitor of a composite of the split, when it is at most one

**Statement.** For natural numbers  $A, q$ : if  $A \leq 1$ , then the composite of the tensor left unitor of `tensorPowerDimension A q` after the map induced by an index equivalence of `tensorSplitEquiv A 0 q` equals the composite of the map induced by an index equivalence of `homogeneousLeftUnitorEquiv A q` after the map induced by an index equivalence of `tensorSplitEquiv A 0 q`.

**Proof.** By case analysis on the natural number  $q$ . For zero, the claim is one of the premises of the rule; for a successor, the claim is checked directly. The goal is simplified using the definition of the dimension of a tensor power, the fact that tensor left unitor of a composite of the split of zero, the extensionality for superoperators and the extensionality for completely positive maps.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidCounit.lean`

```
theorem tensorLeftUnitor_comp_split_of_le_one (A : Nat) (hA : A <= 1) (q : Nat) :
  Superoperator.comp
    (Superoperator.tensorLeftUnitor (tensorPowerDimension A q))
    (Superoperator.ofEquivalence (tensorSplitEquiv A 0 q)) =
  Superoperator.comp
    (Superoperator.ofEquivalence (homogeneousLeftUnitorEquiv A q))
    (Superoperator.ofEquivalence (tensorSplitEquiv A 0 q)) := by
  interval_cases A
  * cases q with
  | zero => exact tensorLeftUnitor_comp_split_zero
  | succ q =>
    apply Superoperator.ext
    apply CPMMap.ext
    ext a b
    have hdim : tensorPowerDimension 0 (q + 1) = 0 := by
      simp [tensorPowerDimension]
    exact isEmptyElim (show Fin 0 from hdim |> a.1)
  * exact tensorLeftUnitor_comp_split_one q
```

#### 4.4.593 Day left unitor of a tensor product of the identity of a composite of the split, when it is at most one

**Statement.** For natural numbers  $A, q$ : if  $A \leq 1$ , then an explicit expression in the composition, the tensor left unitor, the dimension of a tensor power and the tensor product equals the composite of the map induced by an index equivalence of `homogeneousLeftUnitorEquiv A q` after the map induced by an index equivalence of `tensorSplitEquiv A 0 q`.

**Proof.** The goal is simplified using the tensor product of an identity, the fact that observational equality is transitive and the composition of the identity for superoperators.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidCounit.lean`

```
theorem dayLeftUnitor_tensor_id_comp_split_of_le_one (A : Nat) (hA : A <= 1) (q :
  Nat) :
  Superoperator.comp
    (Superoperator.comp
      (Superoperator.tensorLeftUnitor (tensorPowerDimension A q))
      (Superoperator.tensor
        (Superoperator.identity 1 :
          Superoperator (tensorPowerDimension A 0) 1)
```

```

      (Superoperator.identity (tensorPowerDimension A q)))
    (Superoperator.ofEquivalence (tensorSplitEquiv A 0 q)) =
  Superoperator.comp
    (Superoperator.ofEquivalence (homogeneousLeftUnitorEquiv A q))
    (Superoperator.ofEquivalence (tensorSplitEquiv A 0 q)) := by
have hten :
  Superoperator.tensor
    (Superoperator.identity 1 :
      Superoperator (tensorPowerDimension A 0) 1)
    (Superoperator.identity (tensorPowerDimension A q)) =
  Superoperator.identity
    (tensorPowerDimension A 0 * tensorPowerDimension A q) := by
convert Superoperator.tensor_identity (n := 1)
  (? := tensorPowerDimension A q)
* rfl
have hmid :
  Superoperator.comp
    (Superoperator.comp
      (Superoperator.tensorLeftUnitor (tensorPowerDimension A q))
      (Superoperator.tensor
        (Superoperator.identity 1 :
          Superoperator (tensorPowerDimension A 0) 1)
          (Superoperator.identity (tensorPowerDimension A q))))
    (Superoperator.ofEquivalence (tensorSplitEquiv A 0 q)) =
  Superoperator.comp
    (Superoperator.comp
      (Superoperator.tensorLeftUnitor (tensorPowerDimension A q))
      (Superoperator.identity
        (tensorPowerDimension A 0 * tensorPowerDimension A q)))
    (Superoperator.ofEquivalence (tensorSplitEquiv A 0 q)) :=
congrArg
  (fun t => Superoperator.comp
    (Superoperator.comp
      (Superoperator.tensorLeftUnitor (tensorPowerDimension A q)) t)
    (Superoperator.ofEquivalence (tensorSplitEquiv A 0 q)))
  hten
refine hmid.trans ?_
have hid :
  Superoperator.comp
    (Superoperator.tensorLeftUnitor (tensorPowerDimension A q))
    (Superoperator.identity
      (tensorPowerDimension A 0 * tensorPowerDimension A q)) =
  Superoperator.tensorLeftUnitor (tensorPowerDimension A q) := by
convert Superoperator.comp_identity
  (Superoperator.tensorLeftUnitor (tensorPowerDimension A q))
simp
have houter := congrArg
  (fun t => Superoperator.comp t
    (Superoperator.ofEquivalence (tensorSplitEquiv A 0 q)))
  hid
exact houter.trans (tensorLeftUnitor_comp_split_of_le_one A hA q)

```

#### 4.4.594 Coint of the exponential of the degree unit, assuming positivity

**Statement.** For natural numbers  $A, p$ : if  $p \neq 0$ , then  $(\text{bangCoint } A).app (\text{tensorPowerDimension } A \ p) (\text{bangDegreeUnit } A \ p)$  equals  $0 : \text{Superoperator } (\text{tensorPowerDimension } A \ p) \ 1$ .

**Proof.** The key step rewrites with the coordinate form of the Yoneda degree unit in the series and the underlying value of the zero.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidCoint.lean`

```
theorem bangCoint_degreeUnit_of_pos (A p : Nat) (hp : p != 0) :
  (bangCoint A).app (tensorPowerDimension A p) (bangDegreeUnit A p) =
    (0 : Superoperator (tensorPowerDimension A p) 1) := by
  change (bangDegreeUnit A p 0).val =
    (0 : Superoperator (tensorPowerDimension A p) 1)
  have h0 : bangDegreeUnit A p 0 =
    (0 : SymmetricElement A 0 (tensorPowerDimension A p)) := by
    rw [bangDegreeUnit_apply]
    simp only [show not (0 = p) from fun h => hp h.symm, reduceDite]
    rfl
  rw [h0]
  exact SymmetricElement.zero_val A 0 (tensorPowerDimension A p)
```

#### 4.4.595 Coint of the exponential of the degree unit of zero

**Statement.** For a natural number  $A$ :  $(\text{bangCoint } A).app (\text{tensorPowerDimension } A \ 0) (\text{bangDegreeUnit } A \ 0)$  equals  $\text{Superoperator.identity } 1 : \text{Superoperator } (\text{tensorPowerDimension } A \ 0) \ 1$ .

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the coordinate form of the Yoneda degree unit in the series, the composition of the identity for superoperators, the symmetric average of the action on a matrix and the reflexivity of the map induced by an index equivalence.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidCoint.lean`

```
theorem bangCoint_degreeUnit_zero (A : Nat) :
  (bangCoint A).app (tensorPowerDimension A 0) (bangDegreeUnit A 0) =
    (Superoperator.identity 1 :
      Superoperator (tensorPowerDimension A 0) 1) := by
  change (bangDegreeUnit A 0 0).val =
    (Superoperator.identity 1 : Superoperator (tensorPowerDimension A 0) 1)
  have h :
    bangDegreeUnit A 0 0 =
      (symmetricPowerProjection A 0).app
        (tensorPowerDimension A 0)
        (Superoperator.identity (tensorPowerDimension A 0)) := by
    simp [bangDegreeUnit_apply]
  rw [h]
  change Superoperator.comp (symmetricAverage A 0)
    (Superoperator.identity (tensorPowerDimension A 0)) =
    (Superoperator.identity 1 : Superoperator (tensorPowerDimension A 0) 1)
  rw [Superoperator.comp_identity]
  apply Superoperator.ext
  apply CPMMap.ext_apply
```

```

intro ?
rw [symmetricAverage_applyMat]
have hperm (sigma : Equiv.Perm (Fin 0)) :
  factorPermutation A 0 sigma =
    Superoperator.identity (tensorPowerDimension A 0) := by
change Superoperator.ofEquivalence (factorPermutationEquiv A 0 sigma) = _
have : factorPermutationEquiv A 0 sigma = Equiv.refl _ := by
  apply Equiv.ext
  intro i
  apply Fin.ext
  exact (fin_val_eq_zero_of_card_one (rfl : tensorPowerDimension A 0 = 1) _).trans
    (fin_val_eq_zero_of_card_one rfl _).symm
  rw [this, Superoperator.ofEquivalence_refl]
simp_rw [hperm]
have hid :
  (Superoperator.identity (tensorPowerDimension A 0)).cp.applyMat ? = ? := by
change (CMap.identity _).applyMat ? = ?
exact CMap.applyMat_identity ?
simp_rw [hid]
rw [Finset.sum_const]
have hcard : (Finset.univ : Finset (Equiv.Perm (Fin 0))).card = 1 := by decide
rw [hcard, <- Nat.cast_smul_eq_nsmul ?, smul_smul]
norm_num
change ? = (CMap.identity 1).applyMat ?
exact (CMap.applyMat_identity ?).symm

```

#### 4.4.596 Left counit of the exponential comultiplication component

**Statement.** For natural numbers  $A, p, q, n$ : an explicit expression in the composition, the left unitor, the exponential modality and the functorial action equals an explicit expression in the exponential modality, the exponential degree unit, the composition and the tensor left unitor.

**Proof.** The key step rewrites with the definition of the functorial action, the definition of the lift, the definition of the functorial action bilinear map and the components of the identity.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidCounit.lean](#)

```

theorem leftCounit_bangComultComponent (A p q n : Nat)
  (x : ((bang A).obj n).Carrier) :
  (Hom.comp (DayTensor.leftUnitor (bang A))
    (Hom.comp (DayTensor.map (bangCounit A) (Hom.id (bang A)))
      (bangComultComponent A p q))).app n x =
  (bang A).act (bangDegreeUnit A q)
  (Superoperator.comp
    (Superoperator.comp
      (Superoperator.tensorLeftUnitor (tensorPowerDimension A q))
      (Superoperator.tensor
        ((bangCounit A).app (tensorPowerDimension A p) (bangDegreeUnit A p))
        (Superoperator.identity (tensorPowerDimension A q))))
    ((bangSplitComponent A p q).app n x)) := by
have he := bangComultComponent_evaluate A p q n x
  (dayTensor dayTensorUnit (bang A))
  (DayTensor.mapBilinear (bangCounit A) (Hom.id (bang A)))
have hmap :
  (DayTensor.map (bangCounit A) (Hom.id (bang A))).app n

```

```

      ((bangComultComponent A p q).app n x) =
      (dayTensor dayTensorUnit (bang A)).act
      ((DayTensor.mapBilinear (bangCounit A) (Hom.id (bang A))).app
      (bangDegreeUnit A p) (bangDegreeUnit A q))
      ((bangSplitComponent A p q).app n x) := by
    simp [DayTensor.map, DayCoend.lift] using he
  let ? : Superoperator n
    (tensorPowerDimension A p * tensorPowerDimension A q) :=
    (bangSplitComponent A p q).app n x
  let q0 : Superoperator (tensorPowerDimension A p) 1 :=
    (bangCounit A).app (tensorPowerDimension A p) (bangDegreeUnit A p)
  let uq := bangDegreeUnit A q
  have hmap' :
    (DayTensor.map (bangCounit A) (Hom.id (bang A))).app n
    ((bangComultComponent A p q).app n x) =
    (dayTensor dayTensorUnit (bang A)).act
    ((DayCoend.intro dayTensorUnit (bang A)).app q0 uq) ? := by
    simp [DayTensor.mapBilinear, Hom.id_app] using hmap
  change
    (DayTensor.leftUnitor (bang A)).app n
    ((DayTensor.map (bangCounit A) (Hom.id (bang A))).app n
    ((bangComultComponent A p q).app n x)) =
    (bang A).act uq
    (Superoperator.comp
    (Superoperator.comp
    (Superoperator.tensorLeftUnitor (tensorPowerDimension A q))
    (Superoperator.tensor q0
    (Superoperator.identity (tensorPowerDimension A q))))
    ?)
  rw [hmap']
  have hnata :=
    (DayTensor.leftUnitor (bang A)).naturality
    ((DayCoend.intro dayTensorUnit (bang A)).app q0 uq) ?
  rw [hnata, DayTensor.leftUnitor_intro q0 uq, (bang A).act_comp]

```

#### 4.4.597 Left counit of the exponential comultiplication component of zero, when it is at most one

**Statement.** For natural numbers  $A, q, n$ : if  $A \leq 1$ , then an explicit expression in the composition, the left unitor, the exponential modality and the functorial action equals  $(\text{bangInjection } A \ q) \cdot \text{app } n \ (x \ q)$ .

**Proof.** Both sides are compared pointwise (by extensionality). The claim follows from a chain of equalities (or inequalities). The argument splits on the relevant condition. An equation between variables is used to substitute one for the other. The key step rewrites with the left counit of the exponential comultiplication component, the counit of the exponential of the degree unit of zero, the coordinate form of the Yoneda degree unit in the series and the definition of the exponential injection.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCounit.lean`

```

theorem leftCounit_bangComultComponent_zero_of_le_one (A : Nat) (hA : A <= 1)
  (q n : Nat) (x : ((bang A).obj n).Carrier) :
  (Hom.comp (DayTensor.leftUnitor (bang A))
  (Hom.comp (DayTensor.map (bangCounit A) (Hom.id (bang A)))
  (bangComultComponent A 0 q))).app n x =

```

```

    (bangInjection A q).app n (x q) := by
rw [leftCounit_bangComultComponent, bangCounit_degreeUnit_zero]
funext j
by_cases hj : j = q
* subst j
  apply SymmetricElement.ext
  have hu :
    bangDegreeUnit A q q =
      (symmetricPowerProjection A q).app
        (tensorPowerDimension A q)
        (Superoperator.identity (tensorPowerDimension A q)) := by
    simp [bangDegreeUnit_apply]
simp only [bangInjection, countableProductInjection, reduceDite]
let U : Superoperator (1 * tensorPowerDimension A q)
  (tensorPowerDimension A q) :=
  Superoperator.tensorLeftUnitor (tensorPowerDimension A q)
let T : Superoperator
  (tensorPowerDimension A 0 * tensorPowerDimension A q)
  (1 * tensorPowerDimension A q) :=
  Superoperator.tensor
    (Superoperator.identity 1 :
      Superoperator (tensorPowerDimension A 0) 1)
    (Superoperator.identity (tensorPowerDimension A q))
let S : Superoperator (tensorPowerDimension A (0 + q))
  (tensorPowerDimension A 0 * tensorPowerDimension A q) :=
  Superoperator.ofEquivalence (tensorSplitEquiv A 0 q)
change Superoperator.comp (bangDegreeUnit A q q).val
  (Superoperator.comp (Superoperator.comp U T)
    ((bangSplitComponent A 0 q).app n x)) =
  (x q).val
rw [hu]
change Superoperator.comp
  (Superoperator.comp (symmetricAverage A q) (Superoperator.identity _))
  (Superoperator.comp (Superoperator.comp U T)
    (Superoperator.comp S (x (0 + q)).val)) =
  (x q).val
rw [Superoperator.comp_identity, symmetricAverage_of_le_one A q hA,
  Superoperator.identity_comp]
-- After the above, goal is (U.comp T).comp (S.comp x.val) = (x q).val
let H := Superoperator.ofEquivalence (homogeneousLeftUnitorEquiv A q)
calc
  Superoperator.comp (Superoperator.comp U T)
    (Superoperator.comp S (x (0 + q)).val) =
    Superoperator.comp
      (Superoperator.comp (Superoperator.comp U T) S)
      (x (0 + q)).val :=
    Superoperator.comp_assoc (Superoperator.comp U T) S (x (0 + q)).val
_ = Superoperator.comp (Superoperator.comp H S) (x (0 + q)).val :=
  congrArg (fun t => Superoperator.comp t (x (0 + q)).val)
    (dayLeftUnitor_tensor_id_comp_split_of_le_one A hA q)
_ = Superoperator.comp H (Superoperator.comp S (x (0 + q)).val) :=
  (Superoperator.comp_assoc H S (x (0 + q)).val).symm
_ = (x q).val :=
  SymmetricElement.left_counit x
* apply SymmetricElement.ext
  have hu : bangDegreeUnit A q j =

```

```

      (0 : SymmetricElement A j (tensorPowerDimension A q)) := by
    rw [bangDegreeUnit_apply]
    simp only [show not (j = q) from hj, reduceDite]
    rfl
  have hz : (bangDegreeUnit A q j).val =
    (0 : Superoperator (tensorPowerDimension A q)
      (tensorPowerDimension A j)) := by
    rw [hu, SymmetricElement.zero_val]
  change Superoperator.comp (bangDegreeUnit A q j).val _ =
    ((bangInjection A q).app n (x q) j).val
  rw [hz, Superoperator.comp_zero_left]
  simp only [bangInjection, countableProductInjection, hj, reduceDite]
  rfl

```

#### 4.4.598 Left counit of the exponential comultiplication component, assuming positivity

**Statement.** For natural numbers  $A, p, q, n$ : if  $p \neq 0$ , then an explicit expression in the composition, the left unitor, the exponential modality and the functorial action equals 0.

**Proof.** The key step rewrites with the left counit of the exponential comultiplication component, the counit of the exponential of the degree unit, assuming positivity, the tensor product of zero for superoperators, in the left argument and the composition of zero for superoperators, in the right argument.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCounit.lean`

```

theorem leftCounit_bangComultComponent_of_pos (A p q n : Nat) (hp : p != 0)
  (x : ((bang A).obj n).Carrier) :
  (Hom.comp (DayTensor.leftUnitor (bang A))
    (Hom.comp (DayTensor.map (bangCounit A) (Hom.id (bang A)))
      (bangComultComponent A p q))).app n x = 0 := by
  rw [leftCounit_bangComultComponent, bangCounit_degreeUnit_of_pos A p hp]
  let ? : Superoperator n
    (tensorPowerDimension A p * tensorPowerDimension A q) :=
    (bangSplitComponent A p q).app n x
  change
    (bang A).act (bangDegreeUnit A q)
      (Superoperator.comp
        (Superoperator.comp
          (Superoperator.tensorLeftUnitor (tensorPowerDimension A q))
          (Superoperator.tensor
            (0 : Superoperator (tensorPowerDimension A p) 1)
            (Superoperator.identity (tensorPowerDimension A q))))
        ?) = 0
  rw [Superoperator.tensor_zero_left, Superoperator.comp_zero_right,
    Superoperator.comp_zero_left, (bang A).act_zero_map]

```

#### 4.4.599 The Day left-counit composite equals the identity for $A \leq 1$

**Statement.** The Day left-counit composite equals the identity for  $A \leq 1$ .

**Proof.** Both sides are compared pointwise (by extensionality). The argument splits on the relevant condition. The key step rewrites with the definition of the functorial action and the definition of the lift.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCounit.lean`

```

theorem bang_left_counit_of_le_one (A : Nat) (hA : A <= 1) :
  Hom.comp (DayTensor.leftUnitor (bang A))
    (Hom.comp (DayTensor.map (bangCounit A) (Hom.id (bang A)))
      (bangComult_of_le_one A hA)) =
  Hom.id (bang A) := by
ext n x
let hAd := bangComultComponentsAdmissible_of_le_one A hA
change
  (DayTensor.leftUnitor (bang A)).app n
    ((DayTensor.map (bangCounit A) (Hom.id (bang A))).app n
      (bangComultApp A hAd n x)) =
  x
have hmap_sum :
  ((dayTensor dayTensorUnit (bang A)).obj n).HasSum
    (fun pq : Nat x Nat =>
      (DayTensor.map (bangCounit A) (Hom.id (bang A))).app n
        (bangComultComponentFamily A n x pq))
    ((DayTensor.map (bangCounit A) (Hom.id (bang A))).app n
      (bangComultApp A hAd n x)) := by
  simp [DayTensor.map, DayCoend.lift] using
    bangComultApp_hasSum A hAd n x
    (dayTensor dayTensorUnit (bang A))
    (DayTensor.mapBilinear (bangCounit A) (Hom.id (bang A)))
have hsum' :
  ((bang A).obj n).HasSum
    (fun pq : Nat x Nat =>
      (Hom.comp (DayTensor.leftUnitor (bang A))
        (Hom.comp (DayTensor.map (bangCounit A) (Hom.id (bang A)))
          (bangComultComponent A pq.1 pq.2))).app n x)
    ((DayTensor.leftUnitor (bang A)).app n
      ((DayTensor.map (bangCounit A) (Hom.id (bang A))).app n
        (bangComultApp A hAd n x))) :=
  (DayTensor.leftUnitor (bang A)).map_sum hmap_sum
have hfam :
  (fun pq : Nat x Nat =>
    (Hom.comp (DayTensor.leftUnitor (bang A))
      (Hom.comp (DayTensor.map (bangCounit A) (Hom.id (bang A)))
        (bangComultComponent A pq.1 pq.2))).app n x) =
  fun pq : Nat x Nat =>
    if h : pq.1 = 0 then
      (bangInjection A pq.2).app n (x pq.2)
    else 0 := by
  funext pq
  by_cases hp : pq.1 = 0
  * simp only [hp, reduceDite]
    exact leftCounit_bangComultComponent_zero_of_le_one A hA pq.2 n x
  * simp only [hp, reduceDite]
    exact leftCounit_bangComultComponent_of_pos A pq.1 pq.2 n hp x
rw [hfam] at hsum'
have hcoord :=
  countableProduct_hasSum_coordinates
    (fun j => symmetricPower A j) n x
have hid :
  ((bang A).obj n).HasSum
    (fun pq : Nat x Nat =>
      if h : pq.1 = 0 then (bangInjection A pq.2).app n (x pq.2) else 0)

```



```

      x := by
have hflat :
  ((bang A).obj n).HasSum
  (fun p : Sigma _ : Nat, Nat =>
    if h : p.1 = 0 then (bangInjection A p.2).app n (x p.2) else 0)
  x := by
refine
  ((bang A).obj n).summation.flatten
  (fun p q =>
    if h : p = 0 then (bangInjection A q).app n (x q) else 0)
  x |>.mpr <fun p => if h : p = 0 then x else 0, ?_, ?_>
* intro p
by_cases hp : p = 0
* simp only [hp, reduceDite]
  exact hcoord
* simp only [hp, reduceDite]
  exact Fiber.hasSum_zero _
* convert Fiber.hasSum_singleAt ((bang A).obj n) (0 : Nat) x using 1
  funext p
  by_cases hp : p = 0 <;> simp [hp]
exact
  ((bang A).obj n).summation.reindex (Equiv.sigmaEquivProd Nat Nat)
  (fun pq =>
    if h : pq.1 = 0 then (bangInjection A pq.2).app n (x pq.2) else 0)
  x |>.mp hflat
exact ((bang A).obj n).summation.unique hsum' hid

```

```

/-! ## Day right-counit ingredients for `A <= 1` -/

```

#### 4.4.600 Day right-counit ingredients for $A \leq 1$

**Statement.** ## Day right-counit ingredients for  $A \leq 1$ .

**Proof.** The key step rewrites with the fact that zero is a right unit for addition for finitely supported sums, the definition of the dimension of a tensor power, the fact that for  $A = 1$  every tensor-power dimension is 1 and the Day left-counit ingredients for  $A \leq 1$ .

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidCounit.lean](#)

```

theorem tensorRightUnitor_comp_split_one (p : Nat) :
  Superoperator.comp
    (Superoperator.tensorRightUnitor (tensorPowerDimension 1 p))
    (Superoperator.ofEquivalence (tensorSplitEquiv 1 p 0)) =
  Superoperator.comp
    (Superoperator.ofEquivalence (homogeneousRightUnitorEquiv 1 p))
    (Superoperator.ofEquivalence (tensorSplitEquiv 1 p 0)) := by
have hsrc : tensorPowerDimension 1 (p + 0) = 1 := by
  rw [Nat.add_zero]; exact tensorPowerDimension_one_eq p
have htgt : tensorPowerDimension 1 p = 1 := tensorPowerDimension_one_eq p
have hmid : tensorPowerDimension 1 p * tensorPowerDimension 1 0 = 1 := by
  simp [tensorPowerDimension]
have hR :
  Superoperator.comp
    (Superoperator.ofEquivalence (homogeneousRightUnitorEquiv 1 p))

```

```

      (Superoperator.ofEquivalence (tensorSplitEquiv 1 p 0)) =
      Superoperator.ofEquivalence
      ((tensorSplitEquiv 1 p 0).trans (homogeneousRightUnitorEquiv 1 p)) :=
      Superoperator.ofEquivalence_comp _ _
let eU : Fin (tensorPowerDimension 1 p * tensorPowerDimension 1 0) ?
  Fin (tensorPowerDimension 1 p) :=
  finCongr (hmid.trans htgt.symm)
have hU :
  Superoperator.tensorRightUnitor (tensorPowerDimension 1 p) =
  Superoperator.ofEquivalence eU := by
change Superoperator.ofEquivalence
  (Superoperator.tensorRightUnitorEquiv (tensorPowerDimension 1 p)) =
  Superoperator.ofEquivalence eU
refine ofEquivalence_dim_one (by simp) htgt _ _
have hL :
  Superoperator.comp
    (Superoperator.tensorRightUnitor (tensorPowerDimension 1 p))
    (Superoperator.ofEquivalence (tensorSplitEquiv 1 p 0)) =
  Superoperator.ofEquivalence ((tensorSplitEquiv 1 p 0).trans eU) := by
rw [hU]
exact Superoperator.ofEquivalence_comp (tensorSplitEquiv 1 p 0) eU
rw [hL, hR]
exact ofEquivalence_dim_one hsrc htgt _ _

```

#### 4.4.601 Tensor right unitor of a composite of the split of zero

**Statement.** The composite of the tensor right unitor of `tensorPowerDimension 0 0` after the map induced by an index equivalence of `tensorSplitEquiv 0 0 0` equals the composite of the map induced by an index equivalence of `homogeneousRightUnitorEquiv 0 0` after the map induced by an index equivalence of `tensorSplitEquiv 0 0 0`.

**Proof.** The key step rewrites with the definition of the dimension of a tensor power, the Day left-count ingredients for  $A \leq 1$  and the map induced by an index equivalence of a composite for superoperators.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidCounit.lean](#)

```

theorem tensorRightUnitor_comp_split_zero :
  Superoperator.comp
    (Superoperator.tensorRightUnitor (tensorPowerDimension 0 0))
    (Superoperator.ofEquivalence (tensorSplitEquiv 0 0 0)) =
  Superoperator.comp
    (Superoperator.ofEquivalence (homogeneousRightUnitorEquiv 0 0))
    (Superoperator.ofEquivalence (tensorSplitEquiv 0 0 0)) := by
have h1 : tensorPowerDimension 0 0 = 1 := rfl
have hmid : tensorPowerDimension 0 0 * tensorPowerDimension 0 0 = 1 := by
  simp [tensorPowerDimension]
have hR :
  Superoperator.comp
    (Superoperator.ofEquivalence (homogeneousRightUnitorEquiv 0 0))
    (Superoperator.ofEquivalence (tensorSplitEquiv 0 0 0)) =
  Superoperator.ofEquivalence
    ((tensorSplitEquiv 0 0 0).trans (homogeneousRightUnitorEquiv 0 0)) :=
  Superoperator.ofEquivalence_comp _ _
let eU : Fin (tensorPowerDimension 0 0 * tensorPowerDimension 0 0) ?
  Fin (tensorPowerDimension 0 0) :=

```

```

    finCongr (hmid.trans h1.symm)
have hU :
  Superoperator.tensorRightUnitor (tensorPowerDimension 0 0) =
    Superoperator.ofEquivalence eU := by
change Superoperator.ofEquivalence
  (Superoperator.tensorRightUnitorEquiv (tensorPowerDimension 0 0)) =
    Superoperator.ofEquivalence eU
exact ofEquivalence_dim_one (by simp) h1 _ _
have hL :
  Superoperator.comp
    (Superoperator.tensorRightUnitor (tensorPowerDimension 0 0))
    (Superoperator.ofEquivalence (tensorSplitEquiv 0 0 0)) =
    Superoperator.ofEquivalence ((tensorSplitEquiv 0 0 0).trans eU) := by
rw [hU]
exact Superoperator.ofEquivalence_comp (tensorSplitEquiv 0 0 0) eU
rw [hL, hR]
exact ofEquivalence_dim_one h1 h1 _ _

```

#### 4.4.602 Tensor right unitor of a composite of the split, when it is at most one

**Statement.** For natural numbers  $A, p$ : if  $A \leq 1$ , then the composite of the tensor right unitor of `tensorPowerDimension A p` after the map induced by an index equivalence of `tensorSplitEquiv A p 0` equals the composite of the map induced by an index equivalence of `homogeneousRightUnitorEquiv A p` after the map induced by an index equivalence of `tensorSplitEquiv A p 0`.

**Proof.** By case analysis on the natural number  $p$ . For zero, the claim is one of the premises of the rule; for a successor, the claim is checked directly. The goal is simplified using the definition of the dimension of a tensor power, the fact that tensor right unitor of a composite of the split of zero, the extensionality for superoperators and the extensionality for completely positive maps.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCounit.lean`

```

theorem tensorRightUnitor_comp_split_of_le_one (A : Nat) (hA : A <= 1) (p : Nat) :
  Superoperator.comp
    (Superoperator.tensorRightUnitor (tensorPowerDimension A p))
    (Superoperator.ofEquivalence (tensorSplitEquiv A p 0)) =
    Superoperator.comp
      (Superoperator.ofEquivalence (homogeneousRightUnitorEquiv A p))
      (Superoperator.ofEquivalence (tensorSplitEquiv A p 0)) := by
interval_cases A
* cases p with
| zero => exact tensorRightUnitor_comp_split_zero
| succ p =>
  apply Superoperator.ext
  apply CPMMap.ext
  ext a b
  have hdim : tensorPowerDimension 0 (p + 1) = 0 := by
    simp [tensorPowerDimension]
  exact isEmptyElim (show Fin 0 from hdim |> a.1)
* exact tensorRightUnitor_comp_split_one p

```

#### 4.4.603 Day right unitor of the identity of a tensor product of a composite of the split, when it is at most one

**Statement.** For natural numbers  $A, p$ : if  $A \leq 1$ , then an explicit expression in the composition, the tensor right unitor, the dimension of a tensor power and the tensor product equals the composite of the map induced by an index equivalence of `homogeneousRightUnitorEquiv A p` after the map induced by an index equivalence of `tensorSplitEquiv A p 0`.

**Proof.** The goal is simplified using the tensor product of an identity, the fact that observational equality is transitive and the composition of the identity for superoperators.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidCounit.lean`

```
theorem dayRightUnitor_id_tensor_comp_split_of_le_one (A : Nat) (hA : A <= 1) (p :
  Nat) :
  Superoperator.comp
    (Superoperator.comp
      (Superoperator.tensorRightUnitor (tensorPowerDimension A p))
      (Superoperator.tensor
        (Superoperator.identity (tensorPowerDimension A p))
        (Superoperator.identity 1 :
          Superoperator (tensorPowerDimension A 0) 1)))
    (Superoperator.ofEquivalence (tensorSplitEquiv A p 0)) =
  Superoperator.comp
    (Superoperator.ofEquivalence (homogeneousRightUnitorEquiv A p))
    (Superoperator.ofEquivalence (tensorSplitEquiv A p 0)) := by
  have hten :
    Superoperator.tensor
      (Superoperator.identity (tensorPowerDimension A p))
      (Superoperator.identity 1 :
        Superoperator (tensorPowerDimension A 0) 1) =
    Superoperator.identity
      (tensorPowerDimension A p * tensorPowerDimension A 0) := by
  convert Superoperator.tensor_identity
    (n := tensorPowerDimension A p) (? := 1) using 1
  * simp
  have hmid :
    Superoperator.comp
      (Superoperator.comp
        (Superoperator.tensorRightUnitor (tensorPowerDimension A p))
        (Superoperator.tensor
          (Superoperator.identity (tensorPowerDimension A p))
          (Superoperator.identity 1 :
            Superoperator (tensorPowerDimension A 0) 1)))
        (Superoperator.ofEquivalence (tensorSplitEquiv A p 0)) =
    Superoperator.comp
      (Superoperator.comp
        (Superoperator.tensorRightUnitor (tensorPowerDimension A p))
        (Superoperator.identity
          (tensorPowerDimension A p * tensorPowerDimension A 0)))
        (Superoperator.ofEquivalence (tensorSplitEquiv A p 0)) :=
  congrArg
    (fun t => Superoperator.comp
      (Superoperator.comp
        (Superoperator.tensorRightUnitor (tensorPowerDimension A p)) t)
      (Superoperator.ofEquivalence (tensorSplitEquiv A p 0)))
```

```

    hten
  refine hmid.trans ?_
  have hid :
    Superoperator.comp
      (Superoperator.tensorRightUnitor (tensorPowerDimension A p))
      (Superoperator.identity
        (tensorPowerDimension A p * tensorPowerDimension A 0)) =
    Superoperator.tensorRightUnitor (tensorPowerDimension A p) := by
  convert Superoperator.comp_identity
    (Superoperator.tensorRightUnitor (tensorPowerDimension A p))
  simp
  have houter := congrArg
    (fun t => Superoperator.comp t
      (Superoperator.ofEquivalence (tensorSplitEquiv A p 0)))
  hid
  exact houter.trans (tensorRightUnitor_comp_split_of_le_one A hA p)

```

#### 4.4.604 Right counit of the exponential comultiplication component

**Statement.** For natural numbers  $A, p, q, n$ : an explicit expression in the composition, the right unitor, the exponential modality and the functorial action equals an explicit expression in the exponential modality, the exponential degree unit, the composition and the tensor right unitor.

**Proof.** The key step rewrites with the definition of the functorial action, the definition of the lift, the definition of the functorial action bilinear map and the components of the identity.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCounit.lean`

```

theorem rightCounit_bangComultComponent (A p q n : Nat)
  (x : ((bang A).obj n).Carrier) :
  (Hom.comp (DayTensor.rightUnitor (bang A))
    (Hom.comp (DayTensor.map (Hom.id (bang A)) (bangCounit A))
      (bangComultComponent A p q))).app n x =
  (bang A).act (bangDegreeUnit A p)
  (Superoperator.comp
    (Superoperator.comp
      (Superoperator.tensorRightUnitor (tensorPowerDimension A p))
      (Superoperator.tensor
        (Superoperator.identity (tensorPowerDimension A p))
        ((bangCounit A).app (tensorPowerDimension A q) (bangDegreeUnit A q))))
    ((bangSplitComponent A p q).app n x)) := by
  have he := bangComultComponent_evaluate A p q n x
  (dayTensor (bang A) dayTensorUnit)
  (DayTensor.mapBilinear (Hom.id (bang A)) (bangCounit A))
  have hmap :
    (DayTensor.map (Hom.id (bang A)) (bangCounit A)).app n
      ((bangComultComponent A p q).app n x) =
    (dayTensor (bang A) dayTensorUnit).act
      ((DayTensor.mapBilinear (Hom.id (bang A)) (bangCounit A)).app
        (bangDegreeUnit A p) (bangDegreeUnit A q))
      ((bangSplitComponent A p q).app n x) := by
  simp [DayTensor.map, DayCoend.lift] using he
  let ? : Superoperator n
    (tensorPowerDimension A p * tensorPowerDimension A q) :=
    (bangSplitComponent A p q).app n x

```

```

let q0 : Superoperator (tensorPowerDimension A q) 1 :=
  (bangCounit A).app (tensorPowerDimension A q) (bangDegreeUnit A q)
let up := bangDegreeUnit A p
have hmap' :
  (DayTensor.map (Hom.id (bang A)) (bangCounit A)).app n
    ((bangComultComponent A p q).app n x) =
  (dayTensor (bang A) dayTensorUnit).act
    ((DayCoend.intro (bang A) dayTensorUnit).app up q0) ? := by
  simp [DayTensor.mapBilinear, Hom.id_app] using hmap
change
  (DayTensor.rightUnitor (bang A)).app n
    ((DayTensor.map (Hom.id (bang A)) (bangCounit A)).app n
      ((bangComultComponent A p q).app n x)) =
  (bang A).act up
  (Superoperator.comp
    (Superoperator.comp
      (Superoperator.tensorRightUnitor (tensorPowerDimension A p))
      (Superoperator.tensor
        (Superoperator.identity (tensorPowerDimension A p)) q0))
    ?)
rw [hmap']
have hnata :=
  (DayTensor.rightUnitor (bang A)).naturality
    ((DayCoend.intro (bang A) dayTensorUnit).app up q0) ?
rw [hnata, DayTensor.rightUnitor_intro up q0, (bang A).act_comp]

```

#### 4.4.605 Right counit of the exponential comultiplication component of zero, when it is at most one

**Statement.** For natural numbers  $A, p, n$ : if  $A \leq 1$ , then an explicit expression in the composition, the right unitor, the exponential modality and the functorial action equals  $(\text{bangInjection } A \ p) \cdot \text{app } n \ (x \ p)$ .

**Proof.** Both sides are compared pointwise (by extensionality). The claim follows from a chain of equalities (or inequalities). The argument splits on the relevant condition. An equation between variables is used to substitute one for the other. The key step rewrites with the right counit of the exponential comultiplication component, the counit of the exponential of the degree unit of zero, the coordinate form of the Yoneda degree unit in the series and the definition of the exponential injection.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCounit.lean`

```

theorem rightCounit_bangComultComponent_zero_of_le_one (A : Nat) (hA : A <= 1)
  (p n : Nat) (x : ((bang A).obj n).Carrier) :
  (Hom.comp (DayTensor.rightUnitor (bang A))
    (Hom.comp (DayTensor.map (Hom.id (bang A)) (bangCounit A))
      (bangComultComponent A p 0))).app n x =
  (bangInjection A p).app n (x p) := by
  rw [rightCounit_bangComultComponent, bangCounit_degreeUnit_zero]
  funext j
  by_cases hj : j = p
  * subst j
  apply SymmetricElement.ext
  have hu :
    bangDegreeUnit A p p =
    (symmetricPowerProjection A p).app

```

```

      (tensorPowerDimension A p)
      (Superoperator.identity (tensorPowerDimension A p)) := by
    simp [bangDegreeUnit_apply]
  simp only [bangInjection, countableProductInjection, reduceDite]
  let U : Superoperator (tensorPowerDimension A p * 1)
    (tensorPowerDimension A p) :=
    Superoperator.tensorRightUnitor (tensorPowerDimension A p)
  let T : Superoperator
    (tensorPowerDimension A p * tensorPowerDimension A 0)
    (tensorPowerDimension A p * 1) :=
    Superoperator.tensor
      (Superoperator.identity (tensorPowerDimension A p))
      (Superoperator.identity 1 :
        Superoperator (tensorPowerDimension A 0) 1)
  let S : Superoperator (tensorPowerDimension A (p + 0))
    (tensorPowerDimension A p * tensorPowerDimension A 0) :=
    Superoperator.ofEquivalence (tensorSplitEquiv A p 0)
  change Superoperator.comp (bangDegreeUnit A p p).val
    (Superoperator.comp (Superoperator.comp U T)
      ((bangSplitComponent A p 0).app n x)) =
    (x p).val
  rw [hu]
  change Superoperator.comp
    (Superoperator.comp (symmetricAverage A p) (Superoperator.identity _))
    (Superoperator.comp (Superoperator.comp U T)
      (Superoperator.comp S (x (p + 0)).val)) =
    (x p).val
  rw [Superoperator.comp_identity, symmetricAverage_of_le_one A p hA,
    Superoperator.identity_comp]
  let H := Superoperator.ofEquivalence (homogeneousRightUnitorEquiv A p)
  calc
    Superoperator.comp (Superoperator.comp U T)
      (Superoperator.comp S (x (p + 0)).val) =
      Superoperator.comp
        (Superoperator.comp (Superoperator.comp U T) S)
        (x (p + 0)).val :=
      Superoperator.comp_assoc (Superoperator.comp U T) S (x (p + 0)).val
    _ = Superoperator.comp (Superoperator.comp H S) (x (p + 0)).val :=
      congrArg (fun t => Superoperator.comp t (x (p + 0)).val)
        (dayRightUnitor_id_tensor_comp_split_of_le_one A hA p)
    _ = Superoperator.comp H (Superoperator.comp S (x (p + 0)).val) :=
      (Superoperator.comp_assoc H S (x (p + 0)).val).symm
    _ = (x p).val :=
      SymmetricElement.right_counit x
* apply SymmetricElement.ext
  have hu : bangDegreeUnit A p j =
    (0 : SymmetricElement A j (tensorPowerDimension A p)) := by
    rw [bangDegreeUnit_apply]
    simp only [show not (j = p) from hj, reduceDite]
    rfl
  have hz : (bangDegreeUnit A p j).val =
    (0 : Superoperator (tensorPowerDimension A p)
      (tensorPowerDimension A j)) := by
    rw [hu, SymmetricElement.zero_val]
  change Superoperator.comp (bangDegreeUnit A p j).val _ =
    ((bangInjection A p).app n (x p) j).val

```

```

rw [hz, Superoperator.comp_zero_left]
simp only [bangInjection, countableProductInjection, hj, reduceDite]
rfl

```

#### 4.4.606 Right counit of the exponential comultiplication component, assuming positivity

**Statement.** For natural numbers  $A, p, q, n$ : if  $q \neq 0$ , then an explicit expression in the composition, the right unitor, the exponential modality and the functorial action equals 0.

**Proof.** The key step rewrites with the right counit of the exponential comultiplication component, the counit of the exponential of the degree unit, assuming positivity, the tensor product of zero for superoperators, in the right argument and the composition of zero for superoperators, in the right argument.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCounit.lean`

```

theorem rightCounit_bangComultComponent_of_pos (A p q n : Nat) (hq : q != 0)
  (x : ((bang A).obj n).Carrier) :
  (Hom.comp (DayTensor.rightUnitor (bang A))
    (Hom.comp (DayTensor.map (Hom.id (bang A)) (bangCounit A))
      (bangComultComponent A p q))).app n x = 0 := by
  rw [rightCounit_bangComultComponent, bangCounit_degreeUnit_of_pos A q hq]
  let ? : Superoperator n
    (tensorPowerDimension A p * tensorPowerDimension A q) :=
    (bangSplitComponent A p q).app n x
  change
    (bang A).act (bangDegreeUnit A p)
      (Superoperator.comp
        (Superoperator.comp
          (Superoperator.tensorRightUnitor (tensorPowerDimension A p))
          (Superoperator.tensor
            (Superoperator.identity (tensorPowerDimension A p))
            (0 : Superoperator (tensorPowerDimension A q) 1)))
        ?) = 0
  rw [Superoperator.tensor_zero_right, Superoperator.comp_zero_right,
    Superoperator.comp_zero_left, (bang A).act_zero_map]

/-! ### Counit forces degree-one boundary weights to remain `1`

Left (resp. right) counit recovers the full degree-one coefficient from the
unscaled `(0,1)` (resp. `(1,0)`) bang-split component. Uniform `1/2`
scaling of those boundary components is therefore incompatible with the
counit laws, even though the same scale repairs the raw Route A joint-effect
matrix inequality at `(A,k)=(2,1)`.
-/

```

#### 4.4.607 Left counit on the unscaled $(0, 1)$ component recovers the full degree-one coefficient ( $A \leq 1$ )

**Statement.** Left counit on the unscaled  $(0, 1)$  component recovers the full degree-one coefficient ( $A \leq 1$ ).

**Proof.** This is an instance of the fact that left counit of the exponential comultiplication component of zero, when it is at most one, applied to the hypothesis that  $A \leq 1$ .



#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCounit.lean`

```
theorem leftCounit_forces_zero_one_weight_one_of_le_one
  (A : Nat) (hA : A <= 1) (n : Nat) (x : ((bang A).obj n).Carrier) :
  (Hom.comp (DayTensor.leftUnitor (bang A))
    (Hom.comp (DayTensor.map (bangCounit A) (Hom.id (bang A)))
      (bangComultComponent A 0 1))).app n x =
  (bangInjection A 1).app n (x 1) :=
  leftCounit_bangComultComponent_zero_of_le_one A hA 1 n x
```

#### 4.4.608 Right counit on the unscaled $(1, 0)$ component recovers the full degree-one coefficient ( $A \leq 1$ )

**Statement.** Right counit on the unscaled  $(1, 0)$  component recovers the full degree-one coefficient ( $A \leq 1$ ).

**Proof.** This is an instance of the fact that right counit of the exponential comultiplication component of zero, when it is at most one, applied to the hypothesis that  $A \leq 1$ .

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCounit.lean`

```
theorem rightCounit_forces_one_zero_weight_one_of_le_one
  (A : Nat) (hA : A <= 1) (n : Nat) (x : ((bang A).obj n).Carrier) :
  (Hom.comp (DayTensor.rightUnitor (bang A))
    (Hom.comp (DayTensor.map (Hom.id (bang A)) (bangCounit A))
      (bangComultComponent A 1 0))).app n x =
  (bangInjection A 1).app n (x 1) :=
  rightCounit_bangComultComponent_zero_of_le_one A hA 1 n x
```

#### 4.4.609 On the degree-one identity series

**Statement.** On the degree-one identity series, left counit of the  $(0, 1)$  component recovers the identity Superoperator at degree one — the boundary weight is exactly 1, not  $1/2$ .

**Proof.** The key step rewrites with the definition of the exponential injection, the definition of the countable product injection and the exponential identity degree one of the coefficient.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCounit.lean`

```
theorem leftCounit_zero_one_identity_coeff_of_le_one (A : Nat) (hA : A <= 1) :
  (((Hom.comp (DayTensor.leftUnitor (bang A))
    (Hom.comp (DayTensor.map (bangCounit A) (Hom.id (bang A)))
      (bangComultComponent A 0 1))).app
    (tensorPowerDimension A 1) (bangIdentityDegreeOne A)) 1).val =
  Superoperator.identity (tensorPowerDimension A 1) := by
  have h :=
    leftCounit_forces_zero_one_weight_one_of_le_one A hA
    (tensorPowerDimension A 1) (bangIdentityDegreeOne A)
  have h1 := congrArg (fun y => y 1) h
  simp only [bangInjection, countableProductInjection, reduceDite] at h1
  change
    (((Hom.comp (DayTensor.leftUnitor (bang A))
      (Hom.comp (DayTensor.map (bangCounit A) (Hom.id (bang A)))
        (bangComultComponent A 0 1))).app
```

```

      (tensorPowerDimension A 1) (bangIdentityDegreeOne A)) 1).val =
      (bangIdentityDegreeOne A 1).val
rw [h1, bangIdentityDegreeOne_coeff]

```

#### 4.4.610 On the degree-one identity series, right counit of the $(1, 0)$ component likewise recovers the identity Superoperator

**Statement.** On the degree-one identity series, right counit of the  $(1, 0)$  component likewise recovers the identity Superoperator.

**Proof.** The key step rewrites with the definition of the exponential injection, the definition of the countable product injection and the exponential identity degree one of the coefficient.

##### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCounit.lean`

```

theorem rightCounit_one_zero_identity_coeff_of_le_one (A : Nat) (hA : A <= 1) :
  (((Hom.comp (DayTensor.rightUnitor (bang A))
    (Hom.comp (DayTensor.map (Hom.id (bang A)) (bangCounit A))
      (bangComultComponent A 1 0))).app
    (tensorPowerDimension A 1) (bangIdentityDegreeOne A)) 1).val =
    Superoperator.identity (tensorPowerDimension A 1) := by
  have h :=
    rightCounit_forces_one_zero_weight_one_of_le_one A hA
    (tensorPowerDimension A 1) (bangIdentityDegreeOne A)
  have h1 := congrArg (fun y => y 1) h
  simp only [bangInjection, countableProductInjection, reduceDite] at h1
  change
    (((Hom.comp (DayTensor.rightUnitor (bang A))
      (Hom.comp (DayTensor.map (Hom.id (bang A)) (bangCounit A))
        (bangComultComponent A 1 0))).app
      (tensorPowerDimension A 1) (bangIdentityDegreeOne A)) 1).val =
      (bangIdentityDegreeOne A 1).val
  rw [h1, bangIdentityDegreeOne_coeff]

```

#### 4.4.611 Uniform $1/2$ scaling repairs the $(2, 1)$ joint-effect matrix bound

**Statement.** Uniform  $1/2$  scaling repairs the  $(2, 1)$  joint-effect matrix bound, but is not a counital repair of bang comultiplication: left/right counit force the  $(0, 1)$  and  $(1, 0)$  boundary weights to remain 1 (full identity recovery), and half of the identity matrix is not the identity.

**Proof.** The witness is assembled directly from its components, using the fact that the dimension of a tensor power equals a power and the fact that the exponential normalized split family effect of the two of one equals one.

##### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCounit.lean`

```

theorem half_scale_not_counital_bang_repair :
  bangNormalizedSplitFamilyEffect_two_one =
    (1 : Matrix (Fin (tensorPowerDimension 2 1))
      (Fin (tensorPowerDimension 2 1)) ?) /\
  (forall (A : Nat) (_hA : A <= 1),
    (((Hom.comp (DayTensor.leftUnitor (bang A))
      (Hom.comp (DayTensor.map (bangCounit A) (Hom.id (bang A)))

```

```

      (bangComultComponent A 0 1))).app
      (tensorPowerDimension A 1) (bangIdentityDegreeOne A)) 1).val =
      Superoperator.identity (tensorPowerDimension A 1)) /\
(forall (A : Nat) (_hA : A <= 1),
  (((Hom.comp (DayTensor.rightUnit (bang A))
    (Hom.comp (DayTensor.map (Hom.id (bang A)) (bangCounit A))
      (bangComultComponent A 1 0))).app
    (tensorPowerDimension A 1) (bangIdentityDegreeOne A)) 1).val =
    Superoperator.identity (tensorPowerDimension A 1)) /\
  ((2 : Nat) : ?)^-1 *
    (1 : Matrix (Fin (tensorPowerDimension 2 1))
      (Fin (tensorPowerDimension 2 1)) ?) !=
    (1 : Matrix (Fin (tensorPowerDimension 2 1))
      (Fin (tensorPowerDimension 2 1)) ?) :=
<bangNormalizedSplitFamilyEffect_two_one_eq_one,
  fun A hA => leftCounit_zero_one_identity_coeff_of_le_one A hA,
  fun A hA => rightCounit_one_zero_identity_coeff_of_le_one A hA,
  half_one_ne_one (Nat.pos_of_ne_zero (by
    simp [tensorPowerDimension_eq_pow]))>

```

#### 4.4.612 The Day right-counit composite equals the identity for $A \leq 1$

**Statement.** The Day right-counit composite equals the identity for  $A \leq 1$ .

**Proof.** Both sides are compared pointwise (by extensionality). The argument splits on the relevant condition. The key step rewrites with the definition of the functorial action, the definition of the lift, the fact that right counit of the exponential comultiplication component of zero, when it is at most one and the right counit of the exponential comultiplication component, assuming positivity.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCounit.lean`

```

theorem bang_right_counit_of_le_one (A : Nat) (hA : A <= 1) :
  Hom.comp (DayTensor.rightUnit (bang A))
    (Hom.comp (DayTensor.map (Hom.id (bang A)) (bangCounit A))
      (bangComult_of_le_one A hA)) =
  Hom.id (bang A) := by
  ext n x
  let hAd := bangComultComponentsAdmissible_of_le_one A hA
  change
    (DayTensor.rightUnit (bang A)).app n
    ((DayTensor.map (Hom.id (bang A)) (bangCounit A)).app n
      (bangComultApp A hAd n x)) =
    x
  have hmap_sum :
    ((dayTensor (bang A) dayTensorUnit).obj n).HasSum
      (fun pq : Nat x Nat =>
        (DayTensor.map (Hom.id (bang A)) (bangCounit A)).app n
          (bangComultComponentFamily A n x pq))
      ((DayTensor.map (Hom.id (bang A)) (bangCounit A)).app n
        (bangComultApp A hAd n x)) := by
  simp [DayTensor.map, DayCoend.lift] using
    bangComultApp_hasSum A hAd n x
    (dayTensor (bang A) dayTensorUnit)
    (DayTensor.mapBilinear (Hom.id (bang A)) (bangCounit A))
  have hsum' :

```

```

((bang A).obj n).HasSum
  (fun pq : Nat x Nat =>
    (Hom.comp (DayTensor.rightUnitor (bang A))
      (Hom.comp (DayTensor.map (Hom.id (bang A)) (bangCounit A))
        (bangComultComponent A pq.1 pq.2))) .app n x)
  ((DayTensor.rightUnitor (bang A)) .app n
    ((DayTensor.map (Hom.id (bang A)) (bangCounit A)) .app n
      (bangComultApp A hAd n x))) :=
(DayTensor.rightUnitor (bang A)).map_sum hmap_sum
have hfam :
  (fun pq : Nat x Nat =>
    (Hom.comp (DayTensor.rightUnitor (bang A))
      (Hom.comp (DayTensor.map (Hom.id (bang A)) (bangCounit A))
        (bangComultComponent A pq.1 pq.2))) .app n x) =
  fun pq : Nat x Nat =>
    if h : pq.2 = 0 then
      (bangInjection A pq.1) .app n (x pq.1)
    else 0 := by
  funext pq
  by_cases hq : pq.2 = 0
  * simp only [hq, reduceDite]
    exact rightCounit_bangComultComponent_zero_of_le_one A hA pq.1 n x
  * simp only [hq, reduceDite]
    exact rightCounit_bangComultComponent_of_pos A pq.1 pq.2 n hq x
rw [hfam] at hsum'
have hcoord :=
  countableProduct_hasSum_coordinates
  (fun j => symmetricPower A j) n x
have hid :
  ((bang A).obj n).HasSum
  (fun pq : Nat x Nat =>
    if h : pq.2 = 0 then (bangInjection A pq.1) .app n (x pq.1) else 0)
  x := by
have hflat :
  ((bang A).obj n).HasSum
  (fun s : Sigma _ : Nat, Nat =>
    if h : s.2 = 0 then (bangInjection A s.1) .app n (x s.1) else 0)
  x := by
refine
  ((bang A).obj n).summation.flatten
  (fun p q =>
    if h : q = 0 then (bangInjection A p) .app n (x p) else 0)
  x |>.mpr <fun p => (bangInjection A p) .app n (x p), ?_, ?_>
* intro p
  convert Fiber.hasSum_singleAt ((bang A).obj n) (0 : Nat)
  ((bangInjection A p) .app n (x p)) using 1
  funext q
  by_cases hq : q = 0 <|> simp [hq]
* exact hcoord
exact
  ((bang A).obj n).summation.reindex (Equiv.sigmaEquivProd Nat Nat)
  (fun pq =>
    if h : pq.2 = 0 then (bangInjection A pq.1) .app n (x pq.1) else 0)
  x |>.mp hflat
exact ((bang A).obj n).summation.unique hsum' hid

```

```
/-! ## Day braiding / cocommutativity for `A ≤ 1` -/
```

#### 4.4.613 Day braiding / cocommutativity for $A \leq 1$

**Statement.** ## Day braiding / cocommutativity for  $A \leq 1$ .

**Proof.** The claim follows directly from the definitions of the objects involved.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidCounit.lean](#)

```
theorem bangComultComponent_eq_act (A p q n : Nat)
  (x : ((bang A).obj n).Carrier) :
  (bangComultComponent A p q).app n x =
    (dayTensor (bang A) (bang A)).act
      ((DayCoend.intro (bang A) (bang A)).app
        (bangDegreeUnit A p) (bangDegreeUnit A q))
      ((bangSplitComponent A p q).app n x :
        Superoperator n
          (tensorPowerDimension A p * tensorPowerDimension A q)) := by
have h := bangComultComponent_evaluate A p q n x
  (dayTensor (bang A) (bang A)) (DayCoend.intro (bang A) (bang A))
have hs := DayCoend.evaluate_self
  ((bangComultComponent A p q).app n x)
change DayCoend.evaluate (DayCoend.module (bang A) (bang A))
  (DayCoend.intro (bang A) (bang A))
  ((bangComultComponent A p q).app n x) =
  _ at h
rw [hs] at h
exact h
```

#### 4.4.614 Braiding of the exponential comultiplication component

**Statement.** For natural numbers  $A, p, q, n$ : an explicit expression in the braiding, the exponential modality and the exponential comultiplication component equals an explicit expression in the Day tensor product, the exponential modality, the introduction and the exponential degree unit.

**Proof.** The key step rewrites with the Day braiding / cocommutativity for  $A \leq 1$ , the definition of the braiding and the braiding on an introduced element.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidCounit.lean](#)

```
theorem braiding_bangComultComponent (A p q n : Nat)
  (x : ((bang A).obj n).Carrier) :
  (DayTensor.braiding (bang A) (bang A)).app n
    ((bangComultComponent A p q).app n x) =
    (dayTensor (bang A) (bang A)).act
      ((DayCoend.intro (bang A) (bang A)).app
        (bangDegreeUnit A q) (bangDegreeUnit A p))
      (Superoperator.comp
        (Superoperator.tensorSwap
          (tensorPowerDimension A p) (tensorPowerDimension A q))
        ((bangSplitComponent A p q).app n x :
          Superoperator n
```

```

      (tensorPowerDimension A p * tensorPowerDimension A q)) := by
rw [bangComultComponent_eq_act]
set ? : Superoperator n
      (tensorPowerDimension A p * tensorPowerDimension A q) :=
      (bangSplitComponent A p q).app n x
set gen := (DayCoend.intro (bang A) (bang A)).app
      (bangDegreeUnit A p) (bangDegreeUnit A q)
rw [(DayTensor.braiding (bang A) (bang A)).naturality gen ?,
      DayTensor.braiding_intro, (dayTensor (bang A) (bang A)).act_comp]

```

#### 4.4.615 The tensor swap equals a map induced by an index equivalence, assuming dims of one

**Statement.** For natural numbers  $a, b$ : if  $a = 1$  and  $b = 1$ , then the tensor swap of  $a$  and  $b$  equals an explicit expression in the map induced by an index equivalence and the finite index congruence.

**Proof.** The goal is simplified using the hypothesis that  $a = 1$ , the hypothesis that  $b = 1$  and the Day left-counit ingredients for  $A \leq 1$ .

##### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCounit.lean`

```

theorem tensorSwap_eq_ofEquivalence_of_dims_one {a b : Nat}
  (ha : a = 1) (hb : b = 1) :
  Superoperator.tensorSwap a b =
    Superoperator.ofEquivalence
      (finCongr (by rw [ha, hb]) :
        Fin (a * b) ? Fin (b * a)) := by
change Superoperator.ofEquivalence (Superoperator.tensorSwapEquiv a b) =
  Superoperator.ofEquivalence _
refine ofEquivalence_dim_one (by simp [ha, hb]) (by simp [ha, hb]) _ _

```

#### 4.4.616 Formula for the superoperator, assuming codim of zero

**Statement.** For natural numbers  $n, m$ , superoperators  $f, g$ : if  $m = 0$ , then  $f = g$ .

**Proof.** Both sides are compared pointwise (by extensionality). It follows from the extensionality for superoperators and the extensionality for completely positive maps.

##### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCounit.lean`

```

theorem Superoperator.eq_of_codim_zero {n m : Nat} (hm : m = 0)
  (f g : Superoperator n m) : f = g := by
  apply Superoperator.ext
  apply CPMAP.ext
  ext a b
  exact isEmptyElim (show Fin 0 from hm |> a.1)

```

#### 4.4.617 The dimension equals one, when it is at most the one of the ne of zero

**Statement.** For natural numbers  $A, k$ : if  $A \leq 1$  and it is not the case that  $\text{tensorPowerDimension } A$   $k = 0$ , then the dimension of a tensor power of  $A$  and  $k$  equals 1.

**Proof.** By case analysis on the natural number  $k$ . The case of zero is immediate; for a successor, the claim is checked directly. The goal is simplified using the definition of the dimension of a tensor power and the fact that for  $A = 1$  every tensor-power dimension is 1.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCounit.lean`

```
theorem dim_eq_one_of_le_one_ne_zero (A : Nat) (hA : A <= 1) (k : Nat)
  (h : not tensorPowerDimension A k = 0) :
  tensorPowerDimension A k = 1 := by
  interval_cases A
  * cases k with
  | zero => rfl
  | succ k => simp [tensorPowerDimension] at h
  * exact tensorPowerDimension_one_eq k
```

### 4.4.618 Exponential split of a swap, when it is at most one

**Statement.** For natural numbers  $A, p, q, n$ : if  $A \leq 1$ , then an explicit expression in the composition, the tensor swap, the dimension of a tensor power and the exponential split component equals an explicit expression in the exponential split component, the superoperator and the dimension of a tensor power.

**Proof.** The claim follows from a chain of equalities (or inequalities). The argument splits on the relevant condition. The key step rewrites with standard identities for natural numbers, the fact that the dimension of a tensor power equals a power and the usual algebraic identities.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidCounit.lean`

```
theorem bangSplit_swap_of_le_one (A : Nat) (hA : A <= 1) (p q n : Nat)
  (x : ((bang A).obj n).Carrier) :
  Superoperator.comp
    (Superoperator.tensorSwap
      (tensorPowerDimension A p) (tensorPowerDimension A q))
    ((bangSplitComponent A p q).app n x :
      Superoperator n
        (tensorPowerDimension A p * tensorPowerDimension A q)) =
    ((bangSplitComponent A q p).app n x :
      Superoperator n
        (tensorPowerDimension A q * tensorPowerDimension A p)) := by
  by_cases hzero :
    tensorPowerDimension A q * tensorPowerDimension A p = 0
  * exact Superoperator.eq_of_codim_zero hzero _
  have hp0 : tensorPowerDimension A p != 0 := fun h => hzero (by rw [h, Nat.mul_zero])
  have hq0 : tensorPowerDimension A q != 0 := fun h => hzero (by rw [h, Nat.zero_mul])
  have hp := dim_eq_one_of_le_one_ne_zero A hA p hp0
  have hq := dim_eq_one_of_le_one_ne_zero A hA q hq0
  have hsw := tensorSwap_eq_ofEquivalence_of_dims_one hp hq
  have hsrc : tensorPowerDimension A (p + q) = 1 := by
    rw [tensorPowerDimension_eq_pow, pow_add, <- tensorPowerDimension_eq_pow,
      <- tensorPowerDimension_eq_pow, hp, hq, one_mul]
  have htgt : tensorPowerDimension A q * tensorPowerDimension A p = 1 := by
    rw [hp, hq, one_mul]
  have hcomm : p + q = q + p := Nat.add_comm p q
```

```

let eDeg := finCongr (congrArg (tensorPowerDimension A) hcomm)
have hx :
  (x (p + q)).val =
    Superoperator.comp
      (Superoperator.ofEquivalence eDeg.symm)
      (x (q + p)).val := by
have h fwd :
  Superoperator.comp
    (Superoperator.ofEquivalence eDeg)
    (x (p + q)).val =
      (x (q + p)).val :=
        (SymmetricElement.val_degreeCast hcomm (x (p + q))).trans
          (congrArg SymmetricElement.val
            (SymmetricElement.family_degreeCast x hcomm))
have hcancel :
  Superoperator.comp
    (Superoperator.ofEquivalence eDeg.symm)
    (Superoperator.ofEquivalence eDeg) =
    Superoperator.identity (tensorPowerDimension A (p + q)) := by
  rw [Superoperator.ofEquivalence_comp]
  convert Superoperator.ofEquivalence_refl _
  exact Equiv.symm_trans_self _
calc
  (x (p + q)).val =
    Superoperator.comp
      (Superoperator.identity (tensorPowerDimension A (p + q)))
      (x (p + q)).val :=
      (Superoperator.identity_comp _).symm
  _ = Superoperator.comp
    (Superoperator.comp
      (Superoperator.ofEquivalence eDeg.symm)
      (Superoperator.ofEquivalence eDeg))
    (x (p + q)).val := by rw [← hcancel]
  _ = Superoperator.comp
    (Superoperator.ofEquivalence eDeg.symm)
    (Superoperator.comp
      (Superoperator.ofEquivalence eDeg)
      (x (p + q)).val) :=
    (Superoperator.comp_assoc _ _).symm
  _ = Superoperator.comp
    (Superoperator.ofEquivalence eDeg.symm)
    (x (q + p)).val :=
    congrArg _ h fwd
let eMul : Fin (tensorPowerDimension A p * tensorPowerDimension A q) ?
  Fin (tensorPowerDimension A q * tensorPowerDimension A p) :=
  finCongr (by rw [hp, hq])
simp only [bangSplitComponent]
rw [hsw, hx]
change
  Superoperator.comp (Superoperator.ofEquivalence eMul)
    (Superoperator.comp
      (Superoperator.ofEquivalence (tensorSplitEquiv A p q))
      (Superoperator.comp
        (Superoperator.ofEquivalence eDeg.symm)
        (x (q + p)).val)) =
  Superoperator.comp

```



```

      (Superoperator.ofEquivalence (tensorSplitEquiv A q p))
      (x (q + p)).val
-- Target: eMul comp split comp eDeg^-1 comp x(q+p) = split(q,p) comp x(q+p)
-- Collapse the three ofEquivalences, then use Fin-1 uniqueness.
have hcollapse :
  Superoperator.comp (Superoperator.ofEquivalence eMul)
    (Superoperator.comp
      (Superoperator.ofEquivalence (tensorSplitEquiv A p q))
      (Superoperator.ofEquivalence eDeg.symm)) =
  Superoperator.ofEquivalence
    ((eDeg.symm.trans (tensorSplitEquiv A p q)).trans eMul) := by
  rw [Superoperator.ofEquivalence_comp, Superoperator.ofEquivalence_comp]
-- Reassociate the application onto x
have hreassoc :
  Superoperator.comp (Superoperator.ofEquivalence eMul)
    (Superoperator.comp
      (Superoperator.comp
        (Superoperator.ofEquivalence (tensorSplitEquiv A p q))
        (Superoperator.comp
          (Superoperator.ofEquivalence eDeg.symm)
          (x (q + p)).val)) =
  Superoperator.comp
    (Superoperator.comp (Superoperator.ofEquivalence eMul)
      (Superoperator.comp
        (Superoperator.ofEquivalence (tensorSplitEquiv A p q))
        (Superoperator.ofEquivalence eDeg.symm)))
    (x (q + p)).val := by
  rw [Superoperator.comp_assoc
    (? := Superoperator.ofEquivalence eDeg.symm)]
  rw [Superoperator.comp_assoc]
rw [hreassoc, hcollapse]
exact congrArg (fun t => Superoperator.comp t (x (q + p)).val)
  (ofEquivalence_dim_one (by rw [← hcomm]; exact hsrc) htgt _ _)

```

#### 4.4.619 The braiding of the exponential comultiplication component respects order of one

**Statement.** For natural numbers  $A, p, q, n$ : if  $A \leq 1$ , then an explicit expression in the braiding, the exponential modality and the exponential comultiplication component equals  $(\text{bangComultComponent } A \ q \ p) \cdot \text{app } n \ x$ .

**Proof.** The key step rewrites with the braiding of the exponential comultiplication component, the fact that exponential split of a swap, when it is at most one and the Day braiding / cocommutativity for  $A \leq 1$ .

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidCounit.lean](#)

```

theorem braiding_bangComultComponent_eq_of_le_one
  (A : Nat) (hA : A <= 1) (p q n : Nat)
  (x : ((bang A).obj n).Carrier) :
  (DayTensor.braiding (bang A) (bang A)).app n
    ((bangComultComponent A p q).app n x) =
  (bangComultComponent A q p).app n x := by
  rw [braiding_bangComultComponent, bangSplit_swap_of_le_one A hA p q n x,
    <- bangComultComponent_eq_act]

```

#### 4.4.620 Cocommutativity of the exponential modality, when it is at most one

**Statement.** For a natural number  $A$ : if  $A \leq 1$ , then the composite of the braiding of  $\text{bang } A$  after the exponential comultiplication of order one of  $A$  and  $hA$  equals the exponential comultiplication of order one of  $A$  and  $hA$ .

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the evaluation of itself for  $\text{Day}$  coends and the fact that the braiding of the exponential comultiplication component respects order of one.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidCounit.lean`

```
theorem bang_cocommutative_of_le_one (A : Nat) (hA : A <= 1) :
  Hom.comp (DayTensor.braiding (bang A) (bang A)) (bang A) =
    (bangComult_of_le_one A hA) =
      bangComult_of_le_one A hA := by
ext n x
let hAd := bangComultComponentsAdmissible_of_le_one A hA
change
  (DayTensor.braiding (bang A) (bang A)).app n
  (bangComultApp A hAd n x) =
    bangComultApp A hAd n x
have hfib :
  ((dayTensor (bang A) (bang A)).obj n).HasSum
    (bangComultComponentFamily A n x)
    (bangComultApp A hAd n x) := by
have h := bangComultApp_hasSum A hAd n x
  (dayTensor (bang A) (bang A)) (DayCoend.intro (bang A) (bang A))
have hfun :
  (fun pq : Nat x Nat =>
    DayCoend.evaluate (dayTensor (bang A) (bang A))
      (DayCoend.intro (bang A) (bang A))
      (bangComultComponentFamily A n x pq)) =
    bangComultComponentFamily A n x := by
funext pq
exact DayCoend.evaluate_self _
have hs := DayCoend.evaluate_self (bangComultApp A hAd n x)
change ((dayTensor (bang A) (bang A)).obj n).HasSum
  (fun pq => DayCoend.evaluate (DayCoend.module (bang A) (bang A))
    (DayCoend.intro (bang A) (bang A))
    (bangComultComponentFamily A n x pq))
  (DayCoend.evaluate (DayCoend.module (bang A) (bang A))
    (DayCoend.intro (bang A) (bang A))
    (bangComultApp A hAd n x)) at h
rwa [hfun, hs] at h
have hbraid :
  ((dayTensor (bang A) (bang A)).obj n).HasSum
    (fun pq : Nat x Nat =>
      (DayTensor.braiding (bang A) (bang A)).app n
        (bangComultComponentFamily A n x pq))
    ((DayTensor.braiding (bang A) (bang A)).app n
      (bangComultApp A hAd n x)) :=
  (DayTensor.braiding (bang A) (bang A)).map_sum hfib
have hfam :
  (fun pq : Nat x Nat =>
    (DayTensor.braiding (bang A) (bang A)).app n
```

```

      (bangComultComponentFamily A n x pq)) =
    fun pq : Nat x Nat =>
      bangComultComponentFamily A n x (pq.2, pq.1) := by
    funext pq
    exact braiding_bangComultComponent_eq_of_le_one A hA pq.1 pq.2 n x
  rw [hfam] at hbraid
  have hswap :
    ((dayTensor (bang A) (bang A)).obj n).HasSum
    (fun pq : Nat x Nat =>
      bangComultComponentFamily A n x (pq.2, pq.1))
    (bangComultApp A hAd n x) := by
  exact
    (((dayTensor (bang A) (bang A)).obj n).summation.reindex
      (Equiv.prodComm Nat Nat)
      (bangComultComponentFamily A n x)
      (bangComultApp A hAd n x)).mpr hfib
    exact ((dayTensor (bang A) (bang A)).obj n).summation.unique hbraid hswap

```

#### 4.4.621 Ordered partitions of a fixed total degree

**Definition.** Ordered partitions of a fixed total degree.

**Construction.** Defined to be the finite index of the sum of  $k$  and 1.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidRouteA.lean](#)

```
abbrev DegreePartition (k : Nat) := Fin (k + 1)
```

#### 4.4.622 Encode an ordered partition of $k$ as a pair of natural numbers

**Definition.** Encode an ordered partition of  $k$  as a pair of natural numbers.

**Construction.** Defined to be the difference of  $p.val$ ,  $k$  and the  $val$  of  $p$ .

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidRouteA.lean](#)

```
def degreePartitionToPair (k : Nat) (p : DegreePartition k) : Nat x Nat :=
  (p.val, k - p.val)
```

#### 4.4.623 Decode a pair into the partition sigma type (total degree $p + q$ )

**Definition.** Decode a pair into the partition sigma type (total degree  $p + q$ ).

**Construction.** Constructed by supplying each component of the structure explicitly.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidRouteA.lean](#)

```
def pairToDegreePartition (pq : Nat x Nat) :
  (k : Nat) x DegreePartition k :=
  <pq.1 + pq.2, <pq.1, Nat.lt_succ_of_le (Nat.le_add_right pq.1 pq.2)>>
```

#### 4.4.624 Pair to degree partition of the passage to pair

**Statement.** The degree partition to pair of  $(\text{pairToDegreePartition } pq).1$  and  $(\text{pairToDegreePartition } pq).2$  equals  $pq$ .

**Proof.** By case analysis on  $pq$ . For a construction, the claim is checked directly. The goal is simplified using the definition of the degree partition to pair and the definition of the pair to degree partition.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidRouteA.lean](#)

```
theorem pairToDegreePartition_toPair (pq : Nat x Nat) :
  degreePartitionToPair (pairToDegreePartition pq).1
    (pairToDegreePartition pq).2 =
    pq := by
  cases pq with
  | mk p q =>
    simp [degreePartitionToPair, pairToDegreePartition]
```

#### 4.4.625 Degree partition to pair of the first projection

**Statement.** For a natural number  $k$ :  $(\text{degreePartitionToPair } k \ p).1$  equals the val of  $p$ .

**Proof.** By definition: the left-hand side,  $(\text{degreePartitionToPair } k \ p).1$ , and the right-hand side, the val of  $p$ , unfold to the same term.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidRouteA.lean](#)

```
theorem degreePartitionToPair_fst (k : Nat) (p : DegreePartition k) :
  (degreePartitionToPair k p).1 = p.val :=
  rfl
```

#### 4.4.626 Degree partition to pair of the second projection of a sum

**Statement.** For a natural number  $k$ : the sum of  $(\text{degreePartitionToPair } k \ p).1$  and  $(\text{degreePartitionToPair } k \ p).2$  equals  $k$ .

**Proof.** This is an instance of standard identities for natural numbers.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidRouteA.lean](#)

```
theorem degreePartitionToPair_snd_add (k : Nat) (p : DegreePartition k) :
  (degreePartitionToPair k p).1 + (degreePartitionToPair k p).2 = k :=
  Nat.add_sub_of_le (Nat.le_of_lt_succ p.isLt)
```

`/-! ## Route A: joint effect of the canonical bang-split family`

Each homogeneous split is ``ofEquivalence(tensorSplitEquiv) comp coeff``, so by ``effect_comp_ofEquivalence_left`` every partition ``p+q=k`` has **the same** input effect as the unsplit degree-``k`` coefficient. The finite family over ``DegreePartition k`` therefore has Choi/effect sum ``(k+1) * effect(coeff)``, which is **not** Loewner-below ``effect(coeff)`` (nor below ``I``) whenever the coefficient is trace-preserving and ``k >= 1``. The splits are full reindexings of one channel, not complementary instrument branches -- ?instrument completeness? does not apply.

`-/`

#### 4.4.627 Effect of a canonical bang split equals the effect of the shared homogeneous coefficient (unitary postprocessing)

**Statement.** Effect of a canonical bang split equals the effect of the shared homogeneous coefficient (unitary postprocessing). Formally:  $((\text{bangSplitComponent } A \ p \ q).\text{app } n \ x).\text{cp.effect} = (x \ (p + q)).\text{val.cp.effect}$ .

**Proof.** It follows from the effect of a composite of the map induced by an index equivalence for superoperators, in the left argument.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidRouteA.lean](#)

```
theorem bangSplitComponent_effect (A p q n : Nat)
  (x : ((bang A).obj n).Carrier) :
  ((bangSplitComponent A p q).app n x).cp.effect =
    (x (p + q)).val.cp.effect := by
  change
    (Superoperator.comp
      (Superoperator.ofEquivalence (tensorSplitEquiv A p q))
      (x (p + q)).val).cp.effect =
      (x (p + q)).val.cp.effect
  exact Superoperator.effect_comp_ofEquivalence_left
    (tensorSplitEquiv A p q) (x (p + q)).val
```

#### 4.4.628 Finite family of split effects on the degree-k diagonal

**Definition.** Finite family of split effects on the degree-k diagonal.

**Construction.** Defined by an explicit formula built from the degree partition, the exponential split component and the degree partition to pair.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidRouteA.lean](#)

```
noncomputable def bangSplitFamilyEffect (A k n : Nat)
  (x : ((bang A).obj n).Carrier) :
  Matrix (Fin n) (Fin n) ? :=
  ? p : DegreePartition k,
  ((bangSplitComponent A
    (degreePartitionToPair k p).1
    (degreePartitionToPair k p).2).app n x).cp.effect
```

#### 4.4.629 Proposed Route A joint TNI bound

**Definition.** Proposed Route A joint TNI bound: the Loewner sum of canonical split effects over  $p+q=k$  lies below the unsplit coefficient effect.

**Construction.** Defined to be  $\text{bangSplitFamilyEffect } A \ k \ n \ x \leq (x \ k).\text{val.cp.effect}$ .

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidRouteA.lean](#)

```
def BangSplitFamilyEffectLe (A k n : Nat)
  (x : ((bang A).obj n).Carrier) : Prop :=
  bangSplitFamilyEffect A k n x <= (x k).val.cp.effect
```

#### 4.4.630 Proposed Route A bound against the identity effect

**Definition.** Proposed Route A bound against the identity effect.

**Construction.** Defined to be  $\text{bangSplitFamilyEffect } A \ k \ n \ x \leq (1 : \text{Matrix } (\text{Fin } n) \ (\text{Fin } n) \ \mathbb{C})$ .

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidRouteA.lean](#)

```
def BangSplitFamilyEffectLeOne (A k n : Nat)
  (x : ((bang A).obj n).Carrier) : Prop :=
  bangSplitFamilyEffect A k n x <= (1 : Matrix (Fin n) (Fin n) ?)
```

#### 4.4.631 Every diagonal split shares the degree-k coefficient's effect

**Statement.** Every diagonal split shares the degree-k coefficient's effect. Formally:  $\text{bangSplitFamilyEffect } A \ k \ n \ x = \sum \_p : \text{DegreePartition } k, (x \ k).val.cp.effect$ .

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the fact that effect of a canonical bang split equals the effect of the shared homogeneous coefficient (unitary postprocessing) and the definition of the exponential split family effect.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidRouteA.lean](#)

```
theorem bangSplitFamilyEffect_eq (A k n : Nat)
  (x : ((bang A).obj n).Carrier) :
  bangSplitFamilyEffect A k n x =
    ? _p : DegreePartition k, (x k).val.cp.effect := by
  unfold bangSplitFamilyEffect
  congr 1
  funext p
  have hpq := degreePartitionToPair_snd_add k p
  rw [bangSplitComponent_effect, hpq]
```

#### 4.4.632 Cardinality form: the joint effect is (k+1) copies of the coefficient effect

**Statement.** Cardinality form: the joint effect is (k+1) copies of the coefficient effect. Formally:  $\text{bangSplitFamilyEffect } A \ k \ n \ x = (k + 1) \cdot (x \ k).val.cp.effect$ .

**Proof.** The key step rewrites with the fact that every diagonal split shares the degree-k coefficient's effect, standard identities for finite sums and standard identities for finite types.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidRouteA.lean](#)

```
theorem bangSplitFamilyEffect_nsmul (A k n : Nat)
  (x : ((bang A).obj n).Carrier) :
  bangSplitFamilyEffect A k n x =
    (k + 1) * (x k).val.cp.effect := by
  rw [bangSplitFamilyEffect_eq, Finset.sum_const]
  simp [Fintype.card_fin]
```

#### 4.4.633 Degree-one identity coefficient (only the trivial factor permutation)

**Definition.** Degree-one identity coefficient (only the trivial factor permutation).

**Construction.** Constructed by supplying each component: val and invariant. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidRouteA.lean](#)

```
noncomputable def bangIdentitySymmetricOne (A : Nat) :
  SymmetricElement A 1 (tensorPowerDimension A 1) where
  val := Superoperator.identity (tensorPowerDimension A 1)
  invariant := by
    intro sigma
    have hsigma : sigma = Equiv.refl _ := Subsingleton.elim _ _
    subst hsigma
    change
      Superoperator.comp (factorPermutation A 1 (Equiv.refl _))
        (Superoperator.identity _) =
      Superoperator.identity _
  have hperm :
    factorPermutation A 1 (Equiv.refl _) =
      Superoperator.identity (tensorPowerDimension A 1) := by
    change Superoperator.ofEquivalence (factorPermutationEquiv A 1 (Equiv.refl _)) =
      Superoperator.identity _
  have he :
    factorPermutationEquiv A 1 (Equiv.refl _) = Equiv.refl _ := by
    unfold factorPermutationEquiv
    simp only [Equiv.arrowCongr_refl, Equiv.refl_trans,
      Equiv.symm_trans_self]
  rw [he, Superoperator.ofEquivalence_refl]
  rw [hperm, Superoperator.identity_comp]
```

#### 4.4.634 Series supported only at degree one, with the identity coefficient

**Definition.** Series supported only at degree one, with the identity coefficient.

**Construction.** Defined by cases on the input:  $1 \mapsto$  the exponential identity symmetric one of  $A$ ;  $0 \mapsto 0$ .

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidRouteA.lean](#)

```
noncomputable def bangIdentityDegreeOne (A : Nat) :
  ((bang A).obj (tensorPowerDimension A 1)).Carrier
| 1 => bangIdentitySymmetricOne A
| _ => 0
```

#### 4.4.635 Exponential identity degree one of the coefficient

**Statement.** For a natural number  $A$ :  $(\text{bangIdentityDegreeOne } A \ 1).val$  equals the identity on dimension the dimension of a tensor power of  $A$  at 1.

**Proof.** By definition: the left-hand side,  $(\text{bangIdentityDegreeOne } A \ 1).val$ , and the right-hand side, the identity on dimension the dimension of a tensor power of  $A$  at 1, unfold to the same term.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidRouteA.lean](#)

```

theorem bangIdentityDegreeOne_coeff (A : Nat) :
  (bangIdentityDegreeOne A 1).val =
    Superoperator.identity (tensorPowerDimension A 1) :=
  rfl

```

#### 4.4.636 Loewner obstruction: $2 \cdot I \not\leq I$ on any nonempty system

**Statement.** Loewner obstruction:  $2 \cdot I \not\leq I$  on any nonempty system. Formally:  $\neg (2 \cdot (1 : \text{Matrix } (\text{Fin } n) (\text{Fin } n) \mathbb{C}) \leq (1 : \text{Matrix } (\text{Fin } n) (\text{Fin } n) \mathbb{C}))$ .

**Proof.** The key step rewrites with standard identities for matrices. The remaining numerical facts are checked by direct computation.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidRouteA.lean](#)

```

theorem two_nsmul_one_not_le_one {n : Nat} (hn : 0 < n) :
  not ((2 : Nat) * (1 : Matrix (Fin n) (Fin n) ?) <=
    (1 : Matrix (Fin n) (Fin n) ?)) := by
  intro hle
  have hpsd : (1 - (2 : Nat) * (1 : Matrix (Fin n) (Fin n) ?)).PosSemidef :=
    Matrix.le_iff.mp hle
  have hdiag := SigmaMon.ChoiSum.diag_re_nonneg hpsd <0, hn>
  have heq :
    ((1 : Matrix (Fin n) (Fin n) ?) -
      (2 : Nat) * (1 : Matrix (Fin n) (Fin n) ?)) <0, hn> <0, hn> =
      (-1 : ?) := by
    simp only [two_nsmul, Matrix.sub_apply, Matrix.add_apply, Matrix.one_apply,
      reduceIte]
  norm_num
  rw [heq] at hdiag
  norm_num at hdiag

```

#### 4.4.637 Route A fails already for $A = 2$ , degree 1: two splits of $\text{id}_2$ have joint effect $2 \cdot I \not\leq I$

**Statement.** Route A fails already for  $A = 2$ , degree 1: two splits of  $\text{id}_2$  have joint effect  $2 \cdot I \not\leq I$ . Formally:  $\neg \text{BangSplitFamilyEffectLe } 2 \ 1 \ (\text{tensorPowerDimension } 2 \ 1) \ (\text{bangIdentityDegreeOne } 2)$ .

**Proof.** The key step rewrites with the fact that the dimension of a tensor power equals a power, the fact that cardinality form: the joint effect is  $(k+1)$  copies of the coefficient effect, the exponential identity degree one of the coefficient and the effect of the identity for completely positive maps. The claim is decidable and is checked by exhaustive evaluation.

**Lean 4 source** [QLambda/Domain/Presheaf/DayComonoidRouteA.lean](#)

```

theorem not_bangSplitFamilyEffectLe_two_one :
  not BangSplitFamilyEffectLe 2 1 (tensorPowerDimension 2 1)
    (bangIdentityDegreeOne 2) := by
  intro hle
  have hdim : tensorPowerDimension 2 1 = 2 := by
    simp [tensorPowerDimension_eq_pow]
  have hid_eff :
    (Superoperator.identity (tensorPowerDimension 2 1)).cp.effect =

```



```

    (1 : Matrix (Fin (tensorPowerDimension 2 1))
      (Fin (tensorPowerDimension 2 1)) ?) := by
  change (CPMap.identity (tensorPowerDimension 2 1)).effect = 1
  exact CPMap.effect_identity _
have hsum :
  bangSplitFamilyEffect 2 1 (tensorPowerDimension 2 1)
    (bangIdentityDegreeOne 2) =
    (2 : Nat) * (1 : Matrix (Fin (tensorPowerDimension 2 1))
      (Fin (tensorPowerDimension 2 1)) ?) := by
  rw [bangSplitFamilyEffect_nsmul, bangIdentityDegreeOne_coeff, hid_eff]
have hcoeff :
  ((bangIdentityDegreeOne 2) 1).val.cp.effect =
  (1 : Matrix (Fin (tensorPowerDimension 2 1))
    (Fin (tensorPowerDimension 2 1)) ?) := by
  rw [bangIdentityDegreeOne_coeff, hid_eff]
change
  bangSplitFamilyEffect 2 1 (tensorPowerDimension 2 1)
    (bangIdentityDegreeOne 2) <=
    ((bangIdentityDegreeOne 2) 1).val.cp.effect at hle
rw [hsum, hcoeff] at hle
exact two_nsmul_one_not_le_one (Nat.pos_of_ne_zero (by
  rw [hdim]; decide)) hle

```

#### 4.4.638 Same witness against the $\leq$ I packaging of the Route A bound

**Statement.** Same witness against the  $\leq$  I packaging of the Route A bound. Formally:  $\neg$  BangSplitFamilyEffectLeOne 2 1 (tensorPowerDimension 2 1) (bangIdentityDegreeOne 2).

**Proof.** The key step rewrites with the fact that the dimension of a tensor power equals a power, the fact that cardinality form: the joint effect is  $(k+1)$  copies of the coefficient effect, the exponential identity degree one of the coefficient and the effect of the identity for completely positive maps. The claim is decidable and is checked by exhaustive evaluation.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidRouteA.lean`

```

theorem not_bangSplitFamilyEffectLeOne_two_one :
  not BangSplitFamilyEffectLeOne 2 1 (tensorPowerDimension 2 1)
    (bangIdentityDegreeOne 2) := by
  intro hle
  have hdim : tensorPowerDimension 2 1 = 2 := by
    simp [tensorPowerDimension_eq_pow]
  have hid_eff :
    (Superoperator.identity (tensorPowerDimension 2 1)).cp.effect =
    (1 : Matrix (Fin (tensorPowerDimension 2 1))
      (Fin (tensorPowerDimension 2 1)) ?) := by
    change (CPMap.identity (tensorPowerDimension 2 1)).effect = 1
    exact CPMap.effect_identity _
  have hsum :
    bangSplitFamilyEffect 2 1 (tensorPowerDimension 2 1)
      (bangIdentityDegreeOne 2) =
      (2 : Nat) * (1 : Matrix (Fin (tensorPowerDimension 2 1))
        (Fin (tensorPowerDimension 2 1)) ?) := by
    rw [bangSplitFamilyEffect_nsmul, bangIdentityDegreeOne_coeff, hid_eff]

```

```

change
  bangSplitFamilyEffect 2 1 (tensorPowerDimension 2 1)
    (bangIdentityDegreeOne 2) <= 1 at hle
rw [hsum] at hle
exact two_nsmul_one_not_le_one (Nat.pos_of_ne_zero (by
  rw [hdim]; decide)) hle

```

#### 4.4.639 Named theorem form requested by the Route A gate

**Statement.** Named theorem form requested by the Route A gate: the structured joint bound does **not** hold for the canonical bang-split family. Formally:  $\neg (\forall A \ k \ n \ (x : ((\text{bang } A).obj \ n).Carrier), \text{BangSplitFamilyEffectLe } A \ k \ n \ x))$ .

**Proof.** It follows from the fact that route A fails already for  $A = 2$ , degree 1: two splits of  $\text{id}_2$  have joint effect  $2 \cdot I \not\leq I$ .

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidRouteA.lean`

```

theorem bangSplitFamily_effect_le :
  not (forall (A k n : Nat) (x : ((bang A).obj n).Carrier),
    BangSplitFamilyEffectLe A k n x) := by
  intro h
  exact not_bangSplitFamilyEffectLe_two_one
    (h 2 1 (tensorPowerDimension 2 1) (bangIdentityDegreeOne 2))

/-! ## Gates 6-9: Day transfer gap and claim boundary

Route A refutes a *joint-effect* bound on the raw split Superoperators. The
Day gate `BangComultComponentsAdmissible` quantifies over every bilinear
interpretation. Transferring the effect witness into that quantifier needs a
bilinear `b` that returns both ordered degree-one splits in the same
TNI fiber so they are added together. Fixed projection pairs
`(proj_0, proj_1)` recover only one ordering; product modules place the two
ids in different summands; ambient CP always admits sums. We therefore
record an explicit transfer obligation rather than claiming
`not BangComultComponentsAdmissible 2`.

`BangSplitEffectAdmissible` is a global universal quantification of the
Route A bound over every series element -- not a hereditary carrier-membership
predicate for a subobject of `bang A`. Its failure at `A = 2` therefore
refutes that global bound, not ?every hereditary subobject?.

**L8 terminal route (replacement category):** no TNI/representable
construction of `BangComultDayTransferWitness` is claimed. The named
replacement `AmbientCPDayBangCategory` (`cpModule` fibers) restores
`Fiber.HasSumAdd` and `HasActSumFromDim`; see `DayBangBoundary.lean` for the
Gate-8 test suite `ambientCP_gate8_testSuite`.
-/

```

#### 4.4.640 Definition of the exponential comultiplication Day transfer witness

**Definition.** Gate 6 transfer obligation: a bilinear into a TNI/representable module that recovers both ordered degree-one splits of the identity series in one fiber (so the fiber-2 / Route A obstruction applies to

Day evaluation). A constructed witness would imply  $\neg \text{BangComultComponentsAdmissible } 2$ . No such TNI witness is constructed; L8 resolves via the ambient-CP replacement category in `DayBangBoundary.lean`.

**Construction.** Defined by an explicit formula built from the superoperator module, the bilinear map, the exponential modality and the dimension of a tensor power.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidRouteA.lean`

```
def BangComultDayTransferWitness : Prop :=
  exists (L : Module) (b : Bilinear (bang 2) (bang 2) L)
    (z_0_1 z_1_0 : (L.obj (tensorPowerDimension 2 1)).Carrier),
    DayCoend.evaluate L b
      (bangComultComponentFamily 2 (tensorPowerDimension 2 1)
        (bangIdentityDegreeOne 2) (0, 1)) =
      z_0_1 /\
    DayCoend.evaluate L b
      (bangComultComponentFamily 2 (tensorPowerDimension 2 1)
        (bangIdentityDegreeOne 2) (1, 0)) =
      z_1_0 /\
  not exists ? : (L.obj (tensorPowerDimension 2 1)).Carrier,
    (L.obj (tensorPowerDimension 2 1)).HasSum
      (fun i : Bool => bif i then z_0_1 else z_1_0) ?
```

#### 4.4.641 A Day-transfer witness isolates an inadmissible two-term row of the full component family

**Statement.** A Day-transfer witness isolates an inadmissible two-term row of the full component family, and therefore refutes mixed-component admissibility at dimension two. Formally:  $\text{BangComultDayTransferWitness} \rightarrow \neg \text{BangComultComponentsAdmissible } 2$ .

**Proof.** By case analysis on `b`. For true and false, the claim is checked directly. The key step rewrites with the definition of the `f` and standard identities for sets.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidRouteA.lean`

```
theorem bangComultDayTransferWitness_not_admissible :
  BangComultDayTransferWitness -> not BangComultComponentsAdmissible 2 := by
  rintro <L, b, z_0_1, z_1_0, hz_0_1, hz_1_0, hbad> hAd
  let n := tensorPowerDimension 2 1
  let x := bangIdentityDegreeOne 2
  let F : Nat x Nat -> (L.obj n).Carrier := fun pq =>
    DayCoend.evaluate L b (bangComultComponentFamily 2 n x pq)
  obtain <z, hz> := hAd n x L b
  have hzF : (L.obj n).HasSum F z := by
    simpa [F, n, x] using hz
  let S : Set (Nat x Nat) :=
    {pq | pq = (0, 1) \/ pq = (1, 0)}
  let ? : Bool -> Type := fun b =>
    bif b then (S? : Set (Nat x Nat)) else S
  let e : (Sigma b, ? b) ? Nat x Nat :=
    (Equiv.sumEquivSigmaBool S (S? : Set (Nat x Nat))).symm.trans
    (Equiv.Set.sumCompl S)
  have h? : forall b, Countable (? b) := by
    intro b
    cases b <|> simp [?]
```

```

    all_goals exact Set.to_countable _
let (b : Bool) : Countable (? b) := h? b
have hzReindexed :
  (L.obj n).HasSum (F comp e) z :=
  ((L.obj n).summation.reindex e F z).mpr hzF
obtain <g, hrows, _> :=
  ((L.obj n).summation.flatten
   (fun b (j : ? b) => F (e <b, j>)) z).mpr hzReindexed
have hselected :
  (L.obj n).HasSum (fun j : ? false => F (e <false, j>))
    (g false) :=
  hrows false
let selectedEquiv : Bool ? S :=
  { toFun := fun b => match b with
    | true => <(0, 1), Or.inl rfl>
    | false => <(1, 0), Or.inr rfl>
  invFun := fun pq => if pq.1.1 = 0 then true else false
  left_inv := by
    intro b
    cases b <;> simp
  right_inv := by
    rintro <pq, hpq>
    rcases hpq with rfl | rfl <;> simp }
have hboolF :
  (L.obj n).HasSum
    (fun i : Bool => F (selectedEquiv i)) (g false) := by
  have hre :=
    ((L.obj n).summation.reindex selectedEquiv
     (fun j : ? false => F (e <false, j>)) (g false)).mpr hselected
  convert hre using 1
  funext i
  cases i <;> rfl
apply hbad
refine <g false, ?_>
refine ((L.obj n).hasSum_congr ?_).mpr hboolF
intro i
cases i with
| false =>
  change
    DayCoend.evaluate L b
    (bangComultComponentFamily 2 n x (1, 0)) =
    bif false then z_0_1 else z_1_0
  rw [hz_1_0]
  rfl
| true =>
  change
    DayCoend.evaluate L b
    (bangComultComponentFamily 2 n x (0, 1)) =
    bif true then z_0_1 else z_1_0
  rw [hz_0_1]
  rfl

```

#### 4.4.642 The exponential comultiplication Day transfer witness requires nonadditive and target

**Statement.** Any Day-transfer witness target must fail Bool-add at the obstruction fiber (so ambient-CP targets with `Fiber.HasSumAdd` cannot host it). Formally: `BangComultDayTransferWitness`  $\rightarrow \exists L : \text{Module}\{0\}, \neg \text{Fiber.HasSumAdd } (L.\text{obj } (\text{tensorPowerDimension } 2 \ 1))$ .

**Proof.** Each component of the claim is established separately.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidRouteA.lean`

```
theorem bangComultDayTransferWitness_requires_nonadditive_target :
  BangComultDayTransferWitness ->
    exists L : Module.{0},
      not Fiber.HasSumAdd (L.obj (tensorPowerDimension 2 1)) := by
  rintro <L, b, z_0_1, z_1_0, hz_0_1, hz_1_0, hbad>
  refine <L, ?_>
  intro hadd
  exact hbad (hadd z_0_1 z_1_0)
```

#### 4.4.643 Gate 6 (honest form): Route A alone closes a joint-effect bound, not the Day admissibility quantifier

**Statement.** Gate 6 (honest form): Route A alone closes a joint-effect bound, not the Day admissibility quantifier; the missing bridge is `BangComultDayTransferWitness`. Formally:  $\exists A \ k \ n \ x, \neg \text{BangSplitFamilyEffectLe } A \ k \ n \ x$ .

**Proof.** The witness is assembled directly from its components.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidRouteA.lean`

```
theorem routeA_refutation_exists :
  exists A k n x, not BangSplitFamilyEffectLe A k n x :=
  <2, 1, tensorPowerDimension 2 1, bangIdentityDegreeOne 2,
  not_bangSplitFamilyEffectLe_two_one>
```

#### 4.4.644 Global universal form of the raw Route A joint-effect bound (not a carrier-membership / hereditary-subobject predicate)

**Definition.** Global universal form of the raw Route A joint-effect bound (not a carrier-membership / hereditary-subobject predicate).

**Construction.** Defined by an explicit formula built from the exponential modality and the exponential split family effect order one.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidRouteA.lean`

```
def BangSplitEffectAdmissible (A : Nat) : Prop :=
  forall (k n : Nat) (x : ((bang A).obj n).Carrier),
    BangSplitFamilyEffectLeOne A k n x
```

#### 4.4.645 The global raw split-effect bound fails at $A = 2$

**Statement.** The global raw split-effect bound fails at  $A = 2$ : it excludes the degree-one identity series needed by dereliction / cofree lift of  $\text{id}$ . This does **not** refute every hereditary subobject of  $\text{bang } 2$ . Formally:  $\neg \text{BangSplitEffectAdmissible } 2$ .

**Proof.** It follows from the same witness against the  $\leq \mathbb{I}$  packaging of the Route A bound.

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidRouteA.lean`

```
theorem bangSplitEffectAdmissible_excludes_identity_two :
  not BangSplitEffectAdmissible 2 := by
  intro h
  exact not_bangSplitFamilyEffectLeOne_two_one
    (h 1 (tensorPowerDimension 2 1) (bangIdentityDegreeOne 2))
```

#### 4.4.646 Alias retained for earlier theorem-index citations

**Statement.** Alias retained for earlier theorem-index citations; same statement as `bangSplitEffectAdmissible_excludes_identity_two`. Formally:  $\neg \text{BangSplitEffectAdmissible } 2$ .

**Proof.** This is an instance of the fact that the global raw split-effect bound fails at  $A = 2$ .

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidRouteA.lean`

```
theorem raw_global_effect_bound_fails_at_two :
  not BangSplitEffectAdmissible 2 :=
  bangSplitEffectAdmissible_excludes_identity_two
```

#### 4.4.647 Normalized degree-one split weights: the raw joint effect scaled by $1/2$

**Definition.** Normalized degree-one split weights: the raw joint effect scaled by  $1/2$ . Joint effect is then  $\mathbb{I}$ , repairing the raw Route A *matrix* obstruction at  $(A, k) = (2, 1)$ . This is not by itself a counital comultiplication (see `half_scale_not_counital_bang_repair`).

**Construction.** Defined to be the exponential split family effect scaled by  $2^{-1}$ .

**Lean 4 source** `QLambda/Domain/Presheaf/DayComonoidRouteA.lean`

```
noncomputable def bangNormalizedSplitFamilyEffect_two_one :
  Matrix (Fin (tensorPowerDimension 2 1))
    (Fin (tensorPowerDimension 2 1)) ? :=
  ((2 : Nat) : ?)^-1 *
  bangSplitFamilyEffect 2 1 (tensorPowerDimension 2 1)
    (bangIdentityDegreeOne 2)
```

#### 4.4.648 The exponential normalized split family effect of the two of one equals one

**Statement.** The exponential normalized split family effect two one equals an explicit expression in the dimension of a tensor power.

**Proof.** Both sides are compared pointwise (by extensionality). The argument splits on the relevant condition. The key step rewrites with the fact that cardinality form: the joint effect is  $(k+1)$  copies of the

coefficient effect, the exponential identity degree one of the coefficient, standard identities for matrices and the usual algebraic identities.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidRouteA.lean`

```
theorem bangNormalizedSplitFamilyEffect_two_one_eq_one :
  bangNormalizedSplitFamilyEffect_two_one =
    (1 : Matrix (Fin (tensorPowerDimension 2 1))
      (Fin (tensorPowerDimension 2 1)) ?) := by
  have hid_eff :
    (Superoperator.identity (tensorPowerDimension 2 1)).cp.effect =
      (1 : Matrix (Fin (tensorPowerDimension 2 1))
        (Fin (tensorPowerDimension 2 1)) ?) := by
    change (CMap.identity (tensorPowerDimension 2 1)).effect = 1
    exact CMap.effect_identity _
  unfold bangNormalizedSplitFamilyEffect_two_one
  rw [bangSplitFamilyEffect_nsmul, bangIdentityDegreeOne_coeff, hid_eff]
  -- `(2:?)^-1 * (2 * I) = I`
  have hscale :
    ((2 : Nat) : ?)^-1 * ((2 : Nat) * (1 : Matrix
      (Fin (tensorPowerDimension 2 1))
      (Fin (tensorPowerDimension 2 1)) ?)) =
      1 := by
  rw [two_nsmul]
  ext i j
  simp only [Matrix.smul_apply, Matrix.add_apply, Matrix.one_apply, smul_eq_mul]
  split_ifs with hij
  * -- diagonal: (2:?)^-1 * (1 + 1) = 1
    norm_num
  * -- off-diagonal: (2:?)^-1 * (0 + 0) = 0
    ring
  exact hscale
```

#### 4.4.649 The exponential normalized split family effect of the two of one is at most one

**Statement.** The exponential normalized split family effect two one is at most an explicit expression in the dimension of a tensor power.

**Proof.** The key step rewrites with the fact that the exponential normalized split family effect of the two of one equals one.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidRouteA.lean`

```
theorem bangNormalizedSplitFamilyEffect_two_one_le_one :
  bangNormalizedSplitFamilyEffect_two_one <=
    (1 : Matrix (Fin (tensorPowerDimension 2 1))
      (Fin (tensorPowerDimension 2 1)) ?) := by
  rw [bangNormalizedSplitFamilyEffect_two_one_eq_one]
```

#### 4.4.650 Half of the identity matrix is not the identity on a nonempty system

**Statement.** Half of the identity matrix is not the identity on a nonempty system. Formally:  $2^{-1} \cdot (1 : \text{Matrix } (\text{Fin } n) (\text{Fin } n) \mathbb{C}) \neq (1 : \text{Matrix } (\text{Fin } n) (\text{Fin } n) \mathbb{C})$ .

**Proof.** The goal is simplified using standard identities for matrices and the usual algebraic identities.

#### Lean 4 source `QLambda/Domain/Presheaf/DayComonoidRouteA.lean`

```
theorem half_one_ne_one {n : Nat} (hn : 0 < n) :
  ((2 : Nat) : ?)^-1 * (1 : Matrix (Fin n) (Fin n) ?) !=
    (1 : Matrix (Fin n) (Fin n) ?) := by
  intro heq
  have h00 := congrArg (fun M : Matrix (Fin n) (Fin n) ? => M <0, hn> <0, hn>) heq
  simp only [Matrix.smul_apply, Matrix.one_apply, reduceIte, smul_eq_mul,
    mul_one] at h00
  -- `(2:?)^-1 = 1` is false
  have : ((2 : Nat) : ?)^-1 != 1 := by norm_num
  exact this h00
```

### 4.4.651 Precomposition in the representable argument of a bilinear map

**Definition.** Precomposition in the representable argument of a bilinear map.

**Construction.** Constructed by supplying each component: application, functorial action zero left, functorial action zero right, functorial action sum left, functorial action sum right and naturality. The accompanying laws are verified from the definitions.

#### Lean 4 source `QLambda/Domain/Presheaf/DayInternalHom.lean`

```
noncomputable def precompose {A N : Module} {m n : Nat}
  (f : Superoperator m n)
  (b : Bilinear (representable n) A N) :
  Bilinear (representable m) A N where
app := fun x y => b.app (Superoperator.comp f x) y
map_zero_left := by
  intro p q y
  change b.app (Superoperator.comp f (0 : Superoperator p m)) y = 0
  rw [Superoperator.comp_zero_right]
  exact b.map_zero_left y
map_zero_right := by
  intro p q x
  exact b.map_zero_right _
map_sum_left := by
  intro ? _ p q x s y h
  exact b.map_sum_left y (SigmaMon.ChoiSum.comp_left f h)
map_sum_right := by
  intro ? _ p q x y s h
  exact b.map_sum_right _ h
naturality := by
  intro p' p q' q x y g h
  change Superoperator p m at x
  change
    b.app (Superoperator.comp f (Superoperator.comp x g)) (A.act y h) =
      N.act (b.app (Superoperator.comp f x) y)
        (Superoperator.tensor g h)
  rw [Superoperator.comp_assoc]
  exact b.naturality (Superoperator.comp f x) y g h
```



#### 4.4.652 The closed object $[A, N]$ , represented pointwise by bilinear maps out of a representable

**Definition.** The closed object  $[A, N]$ , represented pointwise by bilinear maps out of a representable.

**Construction.** Constructed by supplying each component: zero, summation, act, act zero element, act zero functorial action, act identity, act composite and act sum element, among others. The accompanying laws are verified from the definitions.

#### Lean 4 source `QLambda/Domain/Presheaf/DayInternalHom.lean`

```
noncomputable def module (A N : Module) : Module where
  obj n :=
    { Carrier := Bilinear (representable n) A N
      zero := Bilinear.zero _ _ _
      summation := Bilinear.partialCountableSum _ _ _ }
  act := fun b f => precompose f b
  act_zero_element := by
    intro m n f
    apply Bilinear.ext
    intro p q x y
    rfl
  act_zero_map := by
    intro m n b
    apply Bilinear.ext
    intro p q x y
    change Superoperator p m at x
    change b.app (Superoperator.comp (0 : Superoperator m n) x) y = 0
    rw [Superoperator.comp_zero_left]
    exact b.map_zero_left y
  act_id := by
    intro n b
    apply Bilinear.ext
    intro p q x y
    change Superoperator p n at x
    change b.app (Superoperator.comp (Superoperator.identity n) x) y =
      b.app x y
    rw [Superoperator.identity_comp]
  act_comp := by
    intro ? m n b f g
    apply Bilinear.ext
    intro p q x y
    change Superoperator p ? at x
    simp only [precompose]
    rw [Superoperator.comp_assoc]
  act_sum_element := by
    intro ? _ m n b s f h p q x y
    exact h p q (Superoperator.comp f x) y
  act_sum_map := by
    intro ? _ m n b f s h p q x y
    exact b.map_sum_left y (SigmaMon.ChoiSum.comp_right x h)
  act_sum_from_one := by
    intro ? _ m bx bs f hs
    have hadm :
      forall p q (r : Superoperator p m) (y : (A.obj q).Carrier),
        exists z, (N.obj (p * q)).HasSum
      (fun i =>
        (precompose (f i) (bx i)).app r y) z := by
```

```

intro p q r y
have h1 :
  (N.obj (1 * q)).HasSum
  (fun i =>
    (bx i).app (Superoperator.identity 1) y)
  (bs.app (Superoperator.identity 1) y) :=
  hs 1 q (Superoperator.identity 1) y
obtain <z0, hz0> := N.act_sum_tensor_from_one (A := q) f h1
have hn1 (i : ?) :
  (bx i).app (Superoperator.comp (f i) r) y =
  N.act
    (N.act ((bx i).app (Superoperator.identity 1) y)
      (Superoperator.tensor (f i)
        (Superoperator.identity q)))
    (Superoperator.tensor r (Superoperator.identity q)) := by
have hf :
  (bx i).app (f i) y =
  N.act ((bx i).app (Superoperator.identity 1) y)
    (Superoperator.tensor (f i)
      (Superoperator.identity q)) := by
  simpa [Superoperator.identity_comp, A.act_id] using
    (bx i).naturality (Superoperator.identity 1) y (f i)
    (Superoperator.identity q)
have hfr :
  (bx i).app (Superoperator.comp (f i) r) y =
  N.act ((bx i).app (f i) y)
    (Superoperator.tensor r
      (Superoperator.identity q)) := by
  simpa [A.act_id] using
    (bx i).naturality (f i) y r (Superoperator.identity q)
rw [hfr, hf, N.act_comp]
refine
  <N.act z0 (Superoperator.tensor r (Superoperator.identity q)),
    ?_>
have hz :=
  N.act_sum_element
    (Superoperator.tensor r (Superoperator.identity q)) hz0
have hfam :
  (fun i => (precompose (f i) (bx i)).app r y) =
  fun i =>
    N.act
      (N.act ((bx i).app (Superoperator.identity 1) y)
        (Superoperator.tensor (f i)
          (Superoperator.identity q)))
      (Superoperator.tensor r (Superoperator.identity q)) := by
  funext i
  simpa [precompose] using hn1 i
rwa [hfam]
exact
  <Bilinear.sumOf (fun i => precompose (f i) (bx i)) hadm,
    Bilinear.sumOf_hasSum _ hadm>
act_sum_tensor_from_one := by
  intro ? _ m B bx bs f hs
  have hadm :
    forall p q (r : Superoperator p (m * B)) (y : (A.obj q).Carrier),
      exists z, (N.obj (p * q)).HasSum

```

```

    (fun i =>
      (precompose
        (Superoperator.tensor (f i)
          (Superoperator.identity B))
        (bx i)).app
      r y) z := by
intro p q r y
have h1 :
  (N.obj ((1 * B) * q)).HasSum
  (fun i =>
    (bx i).app (Superoperator.identity (1 * B)) y)
    (bs.app (Superoperator.identity (1 * B)) y) :=
  hs (1 * B) q (Superoperator.identity (1 * B)) y
let a_1 : Superoperator (1 * (B * q)) ((1 * B) * q) :=
  Superoperator.tensorAssociatorInv 1 B q
let a_2 : Superoperator ((m * B) * q) (m * (B * q)) :=
  Superoperator.tensorAssociator m B q
let x' : ? -> (N.obj (1 * (B * q))).Carrier :=
  fun i =>
    N.act ((bx i).app (Superoperator.identity (1 * B)) y) a_1
let s' : (N.obj (1 * (B * q))).Carrier :=
  N.act (bs.app (Superoperator.identity (1 * B)) y) a_1
have hs' : (N.obj (1 * (B * q))).HasSum x' s' :=
  N.act_sum_element a_1 h1
obtain <z0, hz0> :=
  N.act_sum_tensor_from_one (A := B * q) f hs'
have hten (g : Superoperator m 1) :
  Superoperator.tensor
    (Superoperator.tensor g (Superoperator.identity B))
    (Superoperator.identity q) =
  Superoperator.comp a_1
    (Superoperator.comp
      (Superoperator.tensor g
        (Superoperator.identity (B * q)))
      a_2) := by
have hnata :=
  Superoperator.tensorAssociator_naturality g
  (Superoperator.identity B) (Superoperator.identity q)
have h :=
  congrArg (Superoperator.comp
    (Superoperator.tensorAssociatorInv 1 B q)) hnata
simpa [Superoperator.comp_assoc,
  Superoperator.tensorAssociator_inv_hom,
  Superoperator.identity_comp, Superoperator.tensor_identity,
  a_1, a_2] using h
have hnata (i : ?) :
  (bx i).app
    (Superoperator.comp
      (Superoperator.tensor (f i)
        (Superoperator.identity B))
      r)
  y =
  N.act
    (N.act (x' i)
      (Superoperator.tensor (f i)
        (Superoperator.identity (B * q))))

```

```

      (Superoperator.comp a_2
        (Superoperator.tensor r
          (Superoperator.identity q))) := by
have hf :
  (bx i).app
    (Superoperator.tensor (f i)
      (Superoperator.identity B))
  y =
N.act
  ((bx i).app (Superoperator.identity (1 * B)) y)
  (Superoperator.tensor
    (Superoperator.tensor (f i)
      (Superoperator.identity B))
    (Superoperator.identity q)) := by
simpa [Superoperator.identity_comp, A.act_id] using
  (bx i).naturality (Superoperator.identity (1 * B)) y
  (Superoperator.tensor (f i) (Superoperator.identity B))
  (Superoperator.identity q)
have hfr :
  (bx i).app
    (Superoperator.comp
      (Superoperator.tensor (f i)
        (Superoperator.identity B))
      r)
  y =
N.act
  ((bx i).app
    (Superoperator.tensor (f i)
      (Superoperator.identity B))
    y)
  (Superoperator.tensor r
    (Superoperator.identity q)) := by
simpa [A.act_id] using
  (bx i).naturality
    (Superoperator.tensor (f i) (Superoperator.identity B))
    y r (Superoperator.identity q)
rw [hfr, hf, hten, <- N.act_comp, <- N.act_comp, <- N.act_comp]
refine
  <N.act z0
    (Superoperator.comp a_2
      (Superoperator.tensor r (Superoperator.identity q))),
  ?_>
have hz :=
  N.act_sum_element
    (Superoperator.comp a_2
      (Superoperator.tensor r (Superoperator.identity q)))
  hz0
have hfam :
  (fun i =>
    (precompose
      (Superoperator.tensor (f i)
        (Superoperator.identity B))
      (bx i)).app
      r y) =
  fun i =>
    N.act

```

```

      (N.act (x' i)
        (Superoperator.tensor (f i)
          (Superoperator.identity (B * q))))
      (Superoperator.comp a_2
        (Superoperator.tensor r
          (Superoperator.identity q))) := by
  funext i
  simp [precompose] using hnata i
  rwa [hfam]
exact
<Bilinear.sumOf
  (fun i =>
    precompose
      (Superoperator.tensor (f i) (Superoperator.identity B))
      (bx i))
  hadm,
  Bilinear.sumOf_hasSum _ hadm>

```

#### 4.4.653 Definition of the currying of Day internal homs

**Definition.** The currying of  $b$  is a module morphism from  $X$  to module  $A \multimap N$ .

**Construction.** Constructed by supplying each component: application, functorial action zero left, functorial action zero right, functorial action sum left, functorial action sum right, naturality, functorial action zero and functorial action sum, among others. The accompanying laws are verified from the definitions.

#### Lean 4 source `QLambda/Domain/Presheaf/DayInternalHom.lean`

```

noncomputable def curry {X A N : Module} (b : Bilinear X A N) :
  Hom X (module A N) where
  app := fun n x =>
    { app := fun r y => b.app (X.act x r) y
      map_zero_left := by
        intro p q y
        change b.app (X.act x (0 : Superoperator p n)) y = 0
        rw [X.act_zero_map]
        exact b.map_zero_left y
      map_zero_right := by
        intro p q r
        exact b.map_zero_right _
      map_sum_left := by
        intro ? _ p q r s y h
        exact b.map_sum_left y (X.act_sum_map x h)
      map_sum_right := by
        intro ? _ p q r y s h
        exact b.map_sum_right _ h
      naturality := by
        intro p' p q' q r y f g
        change Superoperator p n at r
        change
          b.app (X.act x (Superoperator.comp r f)) (A.act y g) =
            N.act (b.app (X.act x r) y) (Superoperator.tensor f g)
        rw [← X.act_comp]
        exact b.naturality (X.act x r) y f g }
  map_zero := by

```

```

intro n
apply Bilinear.ext
intro p q r y
change Superoperator p n at r
change b.app (X.act (0 : (X.obj n).Carrier) r) y = 0
rw [X.act_zero_element]
exact b.map_zero_left y
map_sum := by
  intro ? _ n x s h p q r y
  exact b.map_sum_left y (X.act_sum_element r h)
naturality := by
  intro m n x f
  apply Bilinear.ext
  intro p q r y
  change Superoperator p m at r
  simp only [module, precompose]
  rw [X.act_comp]

```

#### 4.4.654 Uncurry a map into the pointwise internal hom

**Definition.** Uncurry a map into the pointwise internal hom.

**Construction.** Constructed by supplying each component: application, functorial action zero left, functorial action zero right, functorial action sum left, functorial action sum right and naturality. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/Presheaf/DayInternalHom.lean](#)

```

noncomputable def uncurry {X A N : Module}
  (? : Hom X (module A N)) : Bilinear X A N where
  app := fun {m n} x y =>
    (? .app m x).app (Superoperator.identity m) y
  map_zero_left := by
    intro m n y
    rw [?.map_zero]
    rfl
  map_zero_right := by
    intro m n x
    exact (? .app m x).map_zero_right _
  map_sum_left := by
    intro ? _ m n x s y h
    exact ?.map_sum h m n (Superoperator.identity m) y
  map_sum_right := by
    intro ? _ m n x y s h
    exact (? .app m x).map_sum_right _ h
  naturality := by
    intro m' m n' n x y f g
    have h? := ?.naturality x f
    have happ := congrArg
      (fun b : Bilinear (representable m') A N =>
        b.app (Superoperator.identity m') (A.act y g)) h?
    simp only [module, precompose] at happ
    rw [Superoperator.comp_identity] at happ
    rw [happ]
    have hb := (? .app m x).naturality

```

```

      (Superoperator.identity m) y f g
change
  (? .app m x) .app
    (Superoperator.comp (Superoperator.identity m) f) (A.act y g) =
  N.act ((? .app m x) .app (Superoperator.identity m) y)
    (Superoperator.tensor f g) at hb
rw [Superoperator.identity_comp] at hb
exact hb

```

#### 4.4.655 Definition of the currying equivalence of Day internal homs

**Definition.** The currying equivalence of  $X$ ,  $A$  and  $N$  is a bilinear map.

**Construction.** Constructed by supplying each component: passage to fun, inverse fun, left inverse and right inverse. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/Presheaf/DayInternalHom.lean](#)

```

noncomputable def curryEquiv (X A N : Module) :
  Bilinear X A N ? Hom X (module A N) where
  toFun := curry
  invFun := uncurry
  left_inv := by
    intro b
    apply Bilinear.ext
    intro m n x y
    change b.app (X.act x (Superoperator.identity m)) y = b.app x y
    rw [X.act_id]
  right_inv := by
    intro ?
    apply Hom.ext
    intro n x
    apply Bilinear.ext
    intro p q r y
    change Superoperator p n at r
    change
      (? .app p (X.act x r)) .app (Superoperator.identity p) y =
      (? .app n x) .app r y
    have h? := ?.naturality x r
    have happ := congrArg
      (fun b : Bilinear (representable p) A N =>
        b.app (Superoperator.identity p) y) h?
    change
      (? .app p (X.act x r)) .app (Superoperator.identity p) y =
      (? .app n x) .app
        (Superoperator.comp r (Superoperator.identity p)) y at happ
    rw [Superoperator.comp_identity] at happ
    exact happ

```

#### 4.4.656 Genuine internal hom for arbitrary specialized modules

**Definition.** Genuine internal hom for arbitrary specialized modules.

**Construction.** Defined to be the module of  $A$  and  $N$ .

#### Lean 4 source `QLambda/Domain/Presheaf/DayInternalHom.lean`

```
noncomputable abbrev dayInternalHom (A N : Module) : Module :=
  DayInternalHom.module A N
```

#### 4.4.657 The concrete same-universe Day closed structure

**Definition.** The concrete same-universe Day closed structure.

**Construction.** Constructed by supplying each component: tensor product, internal hom and closed term. The accompanying laws are verified from the definitions.

#### Lean 4 source `QLambda/Domain/Presheaf/DayInternalHom.lean`

```
noncomputable def dayClosedPresentation : DayClosedPresentation where
  tensor := dayTensorPresentation
  internalHom := dayInternalHom
  closed := fun X A N =>
    (DayCoend.universalEquiv X A N).trans
    (DayInternalHom.curryEquiv X A N)
```

#### 4.4.658 Any two Day tensor presentations of the same pair are canonically isomorphic

**Definition.** Any two Day tensor presentations of the same pair are canonically isomorphic.

**Construction.** Constructed by supplying each component: morphism, inverse, morphism inverse and inverse morphism. The accompanying laws are verified from the definitions.

#### Lean 4 source `QLambda/Domain/Presheaf/DayInternalHom.lean`

```
noncomputable def dayPresentationIso {M N : Module}
  (P Q : DayTensorPresentation M N) : Iso P.object Q.object where
  hom := (P.universal Q.object).symm Q.intro
  inv := (Q.universal P.object).symm P.intro
  hom_inv := by
    apply (Q.universal Q.object).injective
    rw [Q.universal_apply, Q.universal_apply]
    apply Bilinear.ext
    intro m n x y
    have hi := (Q.universal P.object).apply_symm_apply P.intro
    rw [Q.universal_apply] at hi
    have hh := (P.universal Q.object).apply_symm_apply Q.intro
    rw [P.universal_apply] at hh
    have hiapp := congrArg (fun b => b.app x y) hi
    have hhapp := congrArg (fun b => b.app x y) hh
    exact congrArg
      (fun z => ((P.universal Q.object).symm Q.intro).app _ z)
      hiapp |>.trans hhapp
  inv_hom := by
    apply (P.universal P.object).injective
    rw [P.universal_apply, P.universal_apply]
    apply Bilinear.ext
    intro m n x y
    have hh := (P.universal Q.object).apply_symm_apply Q.intro
```



```

rw [P.universal_apply] at hh
have hi := (Q.universal P.object).apply_symm_apply P.intro
rw [Q.universal_apply] at hi
have hhapp := congrArg (fun b => b.app x y) hh
have hiapp := congrArg (fun b => b.app x y) hi
exact congrArg
  (fun z => ((Q.universal P.object).symm P.intro).app _ z)
  hhapp |>.trans hiapp

```

#### 4.4.659 The coend tensor agrees canonically with the existing representable tensor

**Definition.** The coend tensor agrees canonically with the existing representable tensor.

**Construction.** Defined to be the Day presentation isomorphism of the Day tensor product presentation of  $\_$  and the Day tensor product representable presentation of  $A$  and  $B$ .

**Lean 4 source** [QLambda/Domain/Presheaf/DayInternalHom.lean](#)

```

noncomputable def dayTensorRepresentableIso (A B : Nat) :
  Iso (dayTensor (representable A) (representable B))
    (dayTensorRepresentable A B) :=
dayPresentationIso (dayTensorPresentation _ _)
  (dayTensorRepresentablePresentation A B)

```

#### 4.4.660 Fiberwise agreement of the general internal hom with the existing representable formula $[Y(A), N](n) = N(n * A)$

**Definition.** Fiberwise agreement of the general internal hom with the existing representable formula  $[Y(A), N](n) = N(n * A)$ .

**Construction.** Defined to be  $(\text{dayTensorRepresentableEquiv } n \ A \ N).symm.trans (\text{yonedaEquiv } N \ (n * A))$ .

**Lean 4 source** [QLambda/Domain/Presheaf/DayInternalHom.lean](#)

```

noncomputable def dayInternalHomRepresentableFiberEquiv
  (A : Nat) (N : Module) (n : Nat) :
  ((dayInternalHom (representable A) N).obj n).Carrier ?
  ((internalHomRepresentable A N).obj n).Carrier :=
  (dayTensorRepresentableEquiv n A N).symm.trans (yonedaEquiv N (n * A))

```

#### 4.4.661 Module-level agreement of the general internal hom with the existing representable formula

**Definition.** Module-level agreement of the general internal hom with the existing representable formula.

**Construction.** Constructed by supplying each component: morphism, functorial action zero, functorial action sum, naturality, inverse, functorial action zero left, functorial action zero right and functorial action sum left, among others. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/Presheaf/DayInternalHom.lean](#)

```

noncomputable def dayInternalHomRepresentableIso
  (A : Nat) (N : Module) :
  Iso (dayInternalHom (representable A) N)
    (internalHomRepresentable A N) where
hom :=
{ app := fun n b =>
  b.app (Superoperator.identity n) (Superoperator.identity A)
map_zero := by
  intro n
  rfl
map_sum := by
  intro ? _ n f s h
  exact h n A (Superoperator.identity n) (Superoperator.identity A)
naturality := by
  intro m n b f
  change
    b.app (Superoperator.comp f (Superoperator.identity m))
      (Superoperator.identity A) =
      N.act
        (b.app (Superoperator.identity n) (Superoperator.identity A))
        (Superoperator.tensor f (Superoperator.identity A))
  rw [Superoperator.comp_identity]
  have hb := b.naturality (Superoperator.identity n)
    (Superoperator.identity A) f (Superoperator.identity A)
  change
    b.app
      (Superoperator.comp (Superoperator.identity n) f)
      (Superoperator.comp (Superoperator.identity A)
        (Superoperator.identity A)) =
      N.act
        (b.app (Superoperator.identity n) (Superoperator.identity A))
        (Superoperator.tensor f (Superoperator.identity A)) at hb
  simpa only [Superoperator.identity_comp] using hb }
inv :=
{ app := fun n z =>
  { app := fun r s => N.act z (Superoperator.tensor r s)
  map_zero_left := by
    intro p q s
    change (N.obj (n * A)).Carrier at z
    change Superoperator q A at s
    change
      N.act z
        (Superoperator.tensor (0 : Superoperator p n) s) = 0
    rw [Superoperator.tensor_zero_left]
    exact N.act_zero_map z
  map_zero_right := by
    intro p q r
    change (N.obj (n * A)).Carrier at z
    change Superoperator p n at r
    change
      N.act z
        (Superoperator.tensor r (0 : Superoperator q A)) = 0
    rw [Superoperator.tensor_zero_right]
    exact N.act_zero_map z
  map_sum_left := by
    intro ? _ p q r t s h

```

```

    exact N.act_sum_map z
      (SigmaMon.ChoiSum.tensor_hasSum_left h s)
map_sum_right := by
  intro ? _ p q r s t h
  exact N.act_sum_map z
    (SigmaMon.ChoiSum.tensor_hasSum_right r h)
naturality := by
  intro p' p q' q r s f g
  change (N.obj (n * A)).Carrier at z
  change Superoperator p n at r
  change Superoperator q A at s
  change
    N.act z
      (Superoperator.tensor (Superoperator.comp r f)
        (Superoperator.comp s g)) =
      N.act (N.act z (Superoperator.tensor r s))
        (Superoperator.tensor f g)
  rw [N.act_comp, Superoperator.tensor_comp] }
map_zero := by
  intro n
  apply Bilinear.ext
  intro p q r s
  exact N.act_zero_element _
map_sum := by
  intro ? _ n f z h p q r s
  exact N.act_sum_element (Superoperator.tensor r s) h
naturality := by
  intro m n z f
  apply Bilinear.ext
  intro p q r s
  change (N.obj (n * A)).Carrier at z
  change Superoperator p m at r
  change Superoperator q A at s
  simp only [internalHomRepresentable, dayInternalHom,
    DayInternalHom.module, DayInternalHom.precompose]
  rw [N.act_comp, <- Superoperator.tensor_comp,
    Superoperator.identity_comp] }
hom_inv := by
  apply Hom.ext
  intro n z
  change (N.obj (n * A)).Carrier at z
  change
    N.act z
      (Superoperator.tensor (Superoperator.identity n)
        (Superoperator.identity A)) = z
  rw [Superoperator.tensor_identity, N.act_id]
inv_hom := by
  apply Hom.ext
  intro n b
  apply Bilinear.ext
  intro p q r s
  change Superoperator p n at r
  change Superoperator q A at s
  change
    N.act
      (b.app (Superoperator.identity n) (Superoperator.identity A))

```

```

      (Superoperator.tensor r s) =
    b.app r s
  symm
  have hb := b.naturality (Superoperator.identity n)
    (Superoperator.identity A) r s
  change
    b.app
      (Superoperator.comp (Superoperator.identity n) r)
      (Superoperator.comp (Superoperator.identity A) s) =
    N.act
      (b.app (Superoperator.identity n) (Superoperator.identity A))
      (Superoperator.tensor r s) at hb
  simpa only [Superoperator.identity_comp] using hb

```

#### 4.4.662 Concrete negation by the Day internal hom into the tensor unit

**Definition.** Concrete negation by the Day internal hom into the tensor unit.

**Construction.** Defined to be the Day internal morphism of  $\mathbb{M}$  and the Day tensor unit.

**Lean 4 source** [QLambda/Domain/Presheaf/DayNegation.lean](#)

```

noncomputable abbrev neg (M : Module) : Module :=
  dayInternalHom M dayTensorUnit

```

#### 4.4.663 Precomposition of a functional by a module morphism

**Definition.** Precomposition of a functional by a module morphism.

**Construction.** Constructed by supplying each component: application, functorial action zero left, functorial action zero right, functorial action sum left, functorial action sum right and naturality. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/Presheaf/DayNegation.lean](#)

```

noncomputable def mapBilinear {M N : Module} (f : Hom M N)
  (n : Nat) (b : (neg N).obj n |>.Carrier) :
  Bilinear (representable n) M dayTensorUnit where
  app := fun x y => b.app x (f.app _ y)
  map_zero_left := fun y => b.map_zero_left (f.app _ y)
  map_zero_right := by
    intro p q x
    rw [f.map_zero]
    exact b.map_zero_right x
  map_sum_left := fun y h => b.map_sum_left (f.app _ y) h
  map_sum_right := by
    intro ? _ p q x y s h
    exact b.map_sum_right x (f.map_sum h)
  naturality := by
    intro p' p q' q x y g h
    rw [f.naturality]
    exact b.naturality x (f.app q y) g h

```

#### 4.4.664 Day negation is contravariant

**Definition.** Day negation is contravariant.

**Construction.** Constructed by supplying each component: application, functorial action zero, functorial action sum and naturality. The accompanying laws are verified from the definitions.

#### Lean 4 source `QLambda/Domain/Presheaf/DayNegation.lean`

```
noncomputable def map {M N : Module} (f : Hom M N) :
  Hom (neg N) (neg M) where
  app := mapBilinear f
  map_zero := by
    intro n
    apply Bilinear.ext
    intro p q x y
    change (0 : Bilinear (representable n) N dayTensorUnit).app x
      (f.app q y) =
      (0 : Bilinear (representable n) M dayTensorUnit).app x y
    rfl
  map_sum := by
    intro ? _ n b s h p q x y
    exact h p q x (f.app q y)
  naturality := by
    intro m n b g
    apply Bilinear.ext
    intro p q x y
    simp only [mapBilinear, neg, dayInternalHom,
      DayInternalHom.module, DayInternalHom.precompose]
```

#### 4.4.665 The functorial action for Day negations preserves identities

**Statement.** For a superoperator module  $M$ : the functorial action of the identity of  $M$  equals the identity of the negation of  $M$ .

**Proof.** Both sides are compared pointwise (by extensionality). It follows from the extensionality for module morphisms, the extensionality for bilinear maps and reflexivity of equality.

#### Lean 4 source `QLambda/Domain/Presheaf/DayNegation.lean`

```
theorem map_id (M : Module) :
  map (Hom.id M) = Hom.id (neg M) := by
  apply Hom.ext
  intro n b
  apply Bilinear.ext
  intro p q x y
  exact rfl
```

#### 4.4.666 The functorial action for Day negations preserves composition

**Statement.** For superoperator modules  $L, M, N$ , module morphisms  $g, f$ : the functorial action of the composite of  $g$  after  $f$  equals the composite of the functorial action of  $f$  after the functorial action of  $g$ .

**Proof.** Both sides are compared pointwise (by extensionality). It follows from the extensionality for module morphisms, the extensionality for bilinear maps and reflexivity of equality.

#### Lean 4 source `QLambda/Domain/Presheaf/DayNegation.lean`

```
theorem map_comp {L M N : Module} (g : Hom M N) (f : Hom L M) :
  map (Hom.comp g f) = Hom.comp (map f) (map g) := by
  apply Hom.ext
  intro n b
  apply Bilinear.ext
  intro p q x y
  exact rfl
```

#### 4.4.667 Evaluation after symmetry, whose transpose is the double-negation unit

**Definition.** Evaluation after symmetry, whose transpose is the double-negation unit.

**Construction.** Constructed by supplying each component: application, functorial action zero left, functorial action zero right, functorial action sum left, functorial action sum right and naturality. The accompanying laws are verified from the definitions.

#### Lean 4 source `QLambda/Domain/Presheaf/DayNegation.lean`

```
noncomputable def unitBilinear (M : Module) :
  Bilinear M (neg M) dayTensorUnit where
  app := fun {m n} x b =>
    dayTensorUnit.act
      (b.app (Superoperator.identity n) x)
      (Superoperator.tensorSwap m n)
  map_zero_left := by
    intro m n b
    change Bilinear (representable n) M dayTensorUnit at b
    change dayTensorUnit.act
      (b.app (show ((representable n).obj n).Carrier from
        Superoperator.identity n) 0)
      (Superoperator.tensorSwap m n) = 0
    rw [b.map_zero_right]
    exact dayTensorUnit.act_zero_element _
  map_zero_right := by
    intro m n x
    change Superoperator.comp (0 : Superoperator (n * m) 1)
      (Superoperator.tensorSwap m n) = 0
    rw [Superoperator.comp_zero_left]
  map_sum_left := by
    intro ? _ m n x s b h
    exact dayTensorUnit.act_sum_element _
      (b.map_sum_right (Superoperator.identity n) h)
  map_sum_right := by
    intro ? _ m n x b s h
    apply dayTensorUnit.act_sum_element
    exact h n m (Superoperator.identity n) x
  naturality := by
    intro m' m n' n x b f g
    change Bilinear (representable n) M dayTensorUnit at b
    change
      Superoperator.comp
        (b.app (Superoperator.comp g (Superoperator.identity n'))
          (M.act x f))
```

```

      (Superoperator.tensorSwap m' n') =
    Superoperator.comp
      (Superoperator.comp
        (b.app (Superoperator.identity n) x)
        (Superoperator.tensorSwap m n))
      (Superoperator.tensor f g)
  rw [Superoperator.comp_identity]
  have hb := b.naturality (Superoperator.identity n) x g f
  change
    b.app (Superoperator.comp (Superoperator.identity n) g)
      (M.act x f) =
    dayTensorUnit.act
      (b.app (show ((representable n).obj n).Carrier from
        Superoperator.identity n) x)
      (Superoperator.tensor g f) at hb
  rw [Superoperator.identity_comp] at hb
  let z : Superoperator (n * m) 1 :=
    show (dayTensorUnit.obj (n * m)).Carrier from
      b.app (show ((representable n).obj n).Carrier from
        Superoperator.identity n) x
  change b.app g (M.act x f) =
    Superoperator.comp z (Superoperator.tensor g f) at hb
  rw [hb]
  change
    Superoperator.comp
      (Superoperator.comp z (Superoperator.tensor g f))
      (Superoperator.tensorSwap m' n') =
    Superoperator.comp
      (Superoperator.comp z (Superoperator.tensorSwap m n))
      (Superoperator.tensor f g)
  rw [ <- Superoperator.comp_assoc, <- Superoperator.comp_assoc]
  congr 1
  exact (Superoperator.tensorSwap_naturality f g).symm

```

#### 4.4.668 Canonical continuation map $\mathbf{M} \rightarrow \mathbf{M}\bot\bot$

**Definition.** Canonical continuation map  $\mathbf{M} \rightarrow \mathbf{M}\bot\bot$ .

**Construction.** Defined to be the currying of the unit bilinear map of  $\mathbf{M}$ .

**Lean 4 source** `QLambda/Domain/Presheaf/DayNegation.lean`

```

noncomputable def unit (M : Module) : Hom M (neg (neg M)) :=
  DayInternalHom.curry (unitBilinear M)

```

#### 4.4.669 Naturality of the canonical double-negation unit

**Statement.** Naturality of the canonical double-negation unit. Formally:  $\text{Hom.comp (unit N) f} = \text{Hom.comp (map (map f)) (unit M)}$ .

**Proof.** Both sides are compared pointwise (by extensionality). The goal is simplified using the components of the composition, the definition of the unit, the definition of the currying and the definition of the unit bilinear map.

#### Lean 4 source `QLambda/Domain/Presheaf/DayNegation.lean`

```
theorem unit_natural {M N : Module} (f : Hom M N) :
  Hom.comp (unit N) f = Hom.comp (map (map f)) (unit M) := by
  apply Hom.ext
  intro n x
  apply Bilinear.ext
  intro p q r b
  change Bilinear (representable q) N dayTensorUnit at b
  simp only [Hom.comp_app, unit, DayInternalHom.curry, unitBilinear,
    map, mapBilinear]
  exact congrArg
    (fun z => Superoperator.comp
      (b.app (show ((representable q).obj q).Carrier from
        Superoperator.identity q) z)
      (Superoperator.tensorSwap p q))
    (f.naturality x r).symm
```

#### 4.4.670 Precomposition with the double-negation unit retracts the canonical unit of a negated module

**Statement.** Precomposition with the double-negation unit retracts the canonical unit of a negated module. The other composite is the bipolar statement for  $\neg M$  and is not a formal consequence of Day closure. Formally:  $\text{Hom.comp (map (unit M)) (unit (\neg M))} = \text{Hom.id } (\neg M)$ .

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the definition of the unit, the definition of the currying, the definition of the precompose and the composition of the identity for superoperators.

#### Lean 4 source `QLambda/Domain/Presheaf/DayNegation.lean`

```
theorem map_unit_unit_neg (M : Module) :
  Hom.comp (map (unit M)) (unit (\neg M)) = Hom.id (\neg M) := by
  apply Hom.ext
  intro k phi
  apply Bilinear.ext
  intro p q x y
  change Superoperator p k at x
  have hinner :
    ((unit M).app q y).app (Superoperator.identity q)
      ((\neg M).act phi x) =
      Superoperator.comp (phi.app x y)
        (Superoperator.tensorSwap q p) := by
  rw [unit, DayInternalHom.curry]
  change
    dayTensorUnit.act
      ((\neg M).act phi x).app (Superoperator.identity p)
        (M.act y (Superoperator.identity q))
      (Superoperator.tensorSwap q p) =
      Superoperator.comp (phi.app x y) (Superoperator.tensorSwap q p)
  rw [M.act_id]
  have hpre :
    ((\neg M).act phi x).app (Superoperator.identity p) y =
      phi.app x y := by
```



```

change
  (DayInternalHom.precompose x phi).app
    (Superoperator.identity p) y =
    phi.app x y
simp only [DayInternalHom.precompose, Superoperator.comp_identity]
rw [hpre]
rw (config := { transparency := .default }) [representable_act]
simp only [Hom.comp_app, Hom.id_app, map, mapBilinear, unit,
  DayInternalHom.curry]
change
  dayTensorUnit.act
    (((unit M).app q y).app (Superoperator.identity q)
      ((neg M).act phi x))
    (Superoperator.tensorSwap p q) =
    phi.app x y
rw [hinner]
rw (config := { transparency := .all }) [representable_act]
rw (config := { transparency := .all })
[ <- Superoperator.comp_assoc, Superoperator.tensorSwap_involutive,
  Superoperator.comp_identity]

```

#### 4.4.671 The canonical unit of a negated module is fiberwise injective

**Statement.** The canonical unit of a negated module is fiberwise injective. Formally:  $\text{Injective } ((\text{unit } (\text{neg } M)).\text{app } n).$

**Proof.** The goal is closed by simplification with the defining equations.

#### Lean 4 source `QLambda/Domain/Presheaf/DayNegation.lean`

```

theorem unit_neg_injective (M : Module) (n : Nat) :
  Function.Injective ((unit (neg M)).app n) := by
  intro x y hxy
  have hret (z : ((neg M).obj n).Carrier) :
    (map (unit M)).app n ((unit (neg M)).app n z) = z := by
    have h := congrArg
      (fun f : Hom (neg M) (neg M) => f.app n z)
      (map_unit_unit_neg M)
    simpa using h
  rw [ <- hret x, hxy, hret y]

```

#### 4.4.672 The concrete negation data supplied by Day closure

**Definition.** The concrete negation data supplied by Day closure.

**Construction.** Constructed by supplying each component: negation, functorial action, functorial action identity, functorial action composite, unit and unit naturality. The accompanying laws are verified from the definitions.

#### Lean 4 source `QLambda/Domain/Presheaf/DayNegation.lean`

```

noncomputable def data : NegationData where
  neg := neg
  map := map

```

```

map_id := map_id
map_comp := map_comp
unit := unit
unit_natural := unit_natural

```

#### 4.4.673 Extensionality for maps out of a Day tensor: it is enough to check coend generators

**Statement.** Extensionality for maps out of a Day tensor: it is enough to check coend generators. Formally:  
 $f = g$ .

**Proof.** Both sides are compared pointwise (by extensionality). It follows from the definition of the universal equivalence, the extensionality for bilinear maps and the hypothesis that for every  $m, n, (x$ , the application of the product of  $m$  and  $n$  and  $(\text{DayCoend.intro } M \ N) . \text{app } x \ y$  equals the application of the product of  $m$  and  $n$  and  $(\text{DayCoend.intro } M \ N) . \text{app } x \ y$ .

#### Lean 4 source `QLambda/Domain/Presheaf/DayTensorBasic.lean`

```

theorem hom_ext {M N L : Module.{0}}
  {f g : Hom (dayTensor M N) L}
  (h : forall m n (x : (M.obj m).Carrier) (y : (N.obj n).Carrier),
    f.app (m * n) ((DayCoend.intro M N).app x y) =
      g.app (m * n) ((DayCoend.intro M N).app x y)) :
  f = g := by
  apply (DayCoend.universalEquiv M N L).injective
  apply Bilinear.ext
  intro m n x y
  exact h m n x y

```

#### 4.4.674 Bilinear map on generators induced by maps in both variables

**Definition.** Bilinear map on generators induced by maps in both variables.

**Construction.** Constructed by supplying each component: application, functorial action zero left, functorial action zero right, functorial action sum left, functorial action sum right and naturality. The accompanying laws are verified from the definitions.

#### Lean 4 source `QLambda/Domain/Presheaf/DayTensorBasic.lean`

```

noncomputable def mapBilinear {M M' N N' : Module}
  (f : Hom M M') (g : Hom N N') :
  Bilinear M N (dayTensor M' N') where
  app := fun x y => (DayCoend.intro M' N').app (f.app _ x) (g.app _ y)
  map_zero_left := by
    intro m n y
    rw [f.map_zero]
    exact (DayCoend.intro M' N').map_zero_left _
  map_zero_right := by
    intro m n x
    rw [g.map_zero]
    exact (DayCoend.intro M' N').map_zero_right _
  map_sum_left := by
    intro ? _ m n x s y h
    exact (DayCoend.intro M' N').map_sum_left _

```

```

      (f.map_sum h)
map_sum_right := by
  intro ? _ m n x y s h
  exact (DayCoend.intro M' N').map_sum_right _
      (g.map_sum h)
naturality := by
  intro m' m n' n x y p q
  rw [f.naturality, g.naturality]
  exact (DayCoend.intro M' N').naturality
      (f.app m x) (g.app n y) p q

```

#### 4.4.675 Day tensor is a bifunctor on module morphisms

**Definition.** Day tensor is a bifunctor on module morphisms.

**Construction.** Defined to be the lift of the functorial action bilinear map of  $f$  and  $g$ .

**Lean 4 source** [QLambda/Domain/Presheaf/DayTensorBasic.lean](#)

```

noncomputable def map {M M' N N' : Module}
  (f : Hom M M') (g : Hom N N') :
  Hom (dayTensor M N) (dayTensor M' N') :=
  DayCoend.lift (mapBilinear f g)

```

#### 4.4.676 The functorial action on an introduced element

**Statement.** For superoperator modules  $M, M', N, N'$ , module morphisms  $f, g$ , natural numbers  $m, n$ :  $(\text{map } f \ g).app \ (m \ * \ n) \ ((\text{DayCoend.intro } M \ N).app \ x \ y)$  equals  $(\text{DayCoend.intro } M' \ N').app \ (f.app \ m \ x) \ (g.app \ n \ y)$ .

**Proof.** This is an instance of the evaluation on an introduced element.

**Lean 4 source** [QLambda/Domain/Presheaf/DayTensorBasic.lean](#)

```

theorem map_intro {M M' N N' : Module}
  (f : Hom M M') (g : Hom N N') {m n : Nat}
  (x : (M.obj m).Carrier) (y : (N.obj n).Carrier) :
  (map f g).app (m * n) ((DayCoend.intro M N).app x y) =
  (DayCoend.intro M' N').app (f.app m x) (g.app n y) :=
  DayCoend.evaluate_intro (mapBilinear f g) x y

```

#### 4.4.677 The functorial action for Day tensor products preserves identities

**Statement.** For superoperator modules  $M, N$ : the functorial action of the identity of  $M$  and the identity of  $N$  equals the identity of the Day tensor product of  $M$  and  $N$ .

**Proof.** The key step rewrites with the functorial action on an introduced element and the fact that extensionality for maps out of a Day tensor: it is enough to check coend generators.

**Lean 4 source** [QLambda/Domain/Presheaf/DayTensorBasic.lean](#)

```

theorem map_id (M N : Module) :
  map (Hom.id M) (Hom.id N) = Hom.id (dayTensor M N) := by
  apply hom_ext
  intro m n x y
  rw [map_intro]
  rfl

```

#### 4.4.678 The functorial action for Day tensor products preserves composition

**Statement.** For superoperator modules  $M_0, M_1, M_2, N_0, N_1, N_2$ , module morphisms  $f_2, f_1, g_2, g_1$ : the functorial action of the composite of  $f_2$  after  $f_1$  and the composite of  $g_2$  after  $g_1$  equals the composite of the functorial action of  $f_2$  and  $g_2$  after the functorial action of  $f_1$  and  $g_1$ .

**Proof.** The goal is simplified using the functorial action on an introduced element, the components of the composition and the fact that extensionality for maps out of a Day tensor: it is enough to check coend generators.

##### Lean 4 source `QLambda/Domain/Presheaf/DayTensorBasic.lean`

```

theorem map_comp {M_0 M_1 M_2 N_0 N_1 N_2 : Module}
  (f_2 : Hom M_1 M_2) (f_1 : Hom M_0 M_1)
  (g_2 : Hom N_1 N_2) (g_1 : Hom N_0 N_1) :
  map (Hom.comp f_2 f_1) (Hom.comp g_2 g_1) =
    Hom.comp (map f_2 g_2) (map f_1 g_1) := by
  apply hom_ext
  intro m n x y
  simp only [map_intro, Hom.comp_app]

```

#### 4.4.679 The Day tensor unit is the representable at the multiplicative unit

**Definition.** The Day tensor unit is the representable at the multiplicative unit.

**Construction.** Defined to be the representable module at 1.

##### Lean 4 source `QLambda/Domain/Presheaf/DayTensorBasic.lean`

```

noncomputable abbrev dayTensorUnit : Module :=
  representable 1

```

#### 4.4.680 Generator-level bilinear map which exchanges the two Day factors

**Definition.** Generator-level bilinear map which exchanges the two Day factors.

**Construction.** Constructed by supplying each component: application, functorial action zero left, functorial action zero right, functorial action sum left, functorial action sum right and naturality. The accompanying laws are verified from the definitions.

##### Lean 4 source `QLambda/Domain/Presheaf/DayTensorBasic.lean`

```

noncomputable def braidingBilinear (M N : Module) :
  Bilinear M N (dayTensor N M) where
  app := fun {m n} x y =>
    (dayTensor N M).act ((DayCoend.intro N M).app y x)

```

```

      (Superoperator.tensorSwap m n)
map_zero_left := by
  intro m n y
  rw [(DayCoend.intro N M).map_zero_right,
      (dayTensor N M).act_zero_element]
map_zero_right := by
  intro m n x
  rw [(DayCoend.intro N M).map_zero_left,
      (dayTensor N M).act_zero_element]
map_sum_left := by
  intro ? _ m n x s y h
  exact (dayTensor N M).act_sum_element _
    ((DayCoend.intro N M).map_sum_right y h)
map_sum_right := by
  intro ? _ m n x y s h
  exact (dayTensor N M).act_sum_element _
    ((DayCoend.intro N M).map_sum_left x h)
naturality := by
  intro m' m n' n x y f g
  rw [(DayCoend.intro N M).naturality, (dayTensor N M).act_comp,
      (dayTensor N M).act_comp,
      Superoperator.tensorSwap_naturality]

```

#### 4.4.681 Braiding of the genuine Day tensor

**Definition.** Braiding of the genuine Day tensor.

**Construction.** Defined to be the lift of the braiding bilinear map of  $M$  and  $N$ .

**Lean 4 source** [QLambda/Domain/Presheaf/DayTensorBasic.lean](#)

```

noncomputable def braiding (M N : Module) :
  Hom (dayTensor M N) (dayTensor N M) :=
  DayCoend.lift (braidingBilinear M N)

```

#### 4.4.682 The braiding on an introduced element

**Statement.** For superoperator modules  $M, N$ , natural numbers  $m, n$ :  $(\text{braiding } M \ N) \cdot \text{app } (m * n)$   $((\text{DayCoend.intro } M \ N) \cdot \text{app } x \ y)$  equals an explicit expression in the Day tensor product, the introduction and the tensor swap.

**Proof.** This is an instance of the evaluation on an introduced element.

**Lean 4 source** [QLambda/Domain/Presheaf/DayTensorBasic.lean](#)

```

theorem braiding_intro {M N : Module} {m n : Nat}
  (x : (M.obj m).Carrier) (y : (N.obj n).Carrier) :
  (braiding M N).app (m * n) ((DayCoend.intro M N).app x y) =
  (dayTensor N M).act ((DayCoend.intro N M).app y x)
  (Superoperator.tensorSwap m n) :=
  DayCoend.evaluate_intro (braidingBilinear M N) x y

```

#### 4.4.683 Bilinear evaluation of the left Day unitor

**Definition.** Bilinear evaluation of the left Day unitor.

**Construction.** Constructed by supplying each component: application, functorial action zero left, functorial action zero right, functorial action sum left, functorial action sum right and naturality. The accompanying laws are verified from the definitions.

**Lean 4 source** `QLambda/Domain/Presheaf/DayTensorBasic.lean`

```
noncomputable def leftUnitorBilinear (M : Module) :
  Bilinear dayTensorUnit M M where
  app := fun {m n} q x =>
    M.act x
      (Superoperator.comp (Superoperator.tensorLeftUnitor n)
        (Superoperator.tensor q (Superoperator.identity n)))
  map_zero_left := by
    intro m n x
    change M.act x
      (Superoperator.comp (Superoperator.tensorLeftUnitor n)
        (Superoperator.tensor (0 : Superoperator m l)
          (Superoperator.identity n))) = 0
    rw [Superoperator.tensor_zero_left,
      Superoperator.comp_zero_right, M.act_zero_map]
  map_zero_right := by
    intro m n q
    exact M.act_zero_element _
  map_sum_left := by
    intro ? _ m n q s x h
    apply M.act_sum_map x
    exact SigmaMon.ChoiSum.comp_left _ <|
      SigmaMon.ChoiSum.tensor_hasSum_left h (Superoperator.identity n)
  map_sum_right := by
    intro ? _ m n q x s h
    exact M.act_sum_element _ h
  naturality := by
    intro m' m n' n q x f g
    change Superoperator m l at q
    change
      M.act (M.act x g)
        (Superoperator.comp (Superoperator.tensorLeftUnitor n')
          (Superoperator.tensor (Superoperator.comp q f)
            (Superoperator.identity n')))) =
      M.act
        (M.act x
          (Superoperator.comp (Superoperator.tensorLeftUnitor n)
            (Superoperator.tensor q (Superoperator.identity n))))
          (Superoperator.tensor f g)
    rw [M.act_comp, M.act_comp]
    congr 1
    calc
      Superoperator.comp g
        (Superoperator.comp (Superoperator.tensorLeftUnitor n')
          (Superoperator.tensor (Superoperator.comp q f)
            (Superoperator.identity n')))) =
      Superoperator.comp (Superoperator.tensorLeftUnitor n)
        (Superoperator.tensor (Superoperator.comp q f) g) := by
```

```

      rw [Superoperator.comp_assoc,
        <- Superoperator.tensorLeftUnitor_naturality g,
        <- Superoperator.comp_assoc,
        <- Superoperator.tensor_comp]
      simp
    _ = Superoperator.comp
      (Superoperator.comp (Superoperator.tensorLeftUnitor n)
        (Superoperator.tensor q (Superoperator.identity n)))
      (Superoperator.tensor f g) := by
      rw [ <- Superoperator.comp_assoc,
        <- Superoperator.tensor_comp]
      simp

```

#### 4.4.684 Left unitor of the genuine Day tensor

**Definition.** Left unitor of the genuine Day tensor.

**Construction.** Defined to be the lift of the left unitor bilinear map of  $M$ .

**Lean 4 source** `QLambda/Domain/Presheaf/DayTensorBasic.lean`

```

noncomputable def leftUnitor (M : Module) :
  Hom (dayTensor dayTensorUnit M) M :=
  DayCoend.lift (leftUnitorBilinear M)

```

#### 4.4.685 The left unitor on an introduced element

**Statement.** For a superoperator module  $M$ , natural numbers  $m, n$ , a superoperator  $q$ :  $(\text{leftUnitor } M) . \text{app } (m * n) ((\text{DayCoend.intro dayTensorUnit } M) . \text{app } q \ x)$  equals the act of  $x$  and the composite of  $\text{Superoperator.tensorLeftUnitor } n$  after  $\text{Superoperator.tensor } q$  ( $\text{Superoperator.identity } n$ ).

**Proof.** This is an instance of the evaluation on an introduced element.

**Lean 4 source** `QLambda/Domain/Presheaf/DayTensorBasic.lean`

```

theorem leftUnitor_intro {M : Module} {m n : Nat}
  (q : Superoperator m 1) (x : (M.obj n).Carrier) :
  (leftUnitor M).app (m * n)
    ((DayCoend.intro dayTensorUnit M).app q x) =
  M.act x
    (Superoperator.comp (Superoperator.tensorLeftUnitor n)
      (Superoperator.tensor q (Superoperator.identity n))) :=
  DayCoend.evaluate_intro (leftUnitorBilinear M) q x

```

#### 4.4.686 Bilinear evaluation of the right Day unitor

**Definition.** Bilinear evaluation of the right Day unitor.

**Construction.** Constructed by supplying each component: application, functorial action zero left, functorial action zero right, functorial action sum left, functorial action sum right and naturality. The accompanying laws are verified from the definitions.

## Lean 4 source QLambda/Domain/Presheaf/DayTensorBasic.lean

```
noncomputable def rightUnitorBilinear (M : Module) :
  Bilinear M dayTensorUnit M where
  app := fun {m n} x q =>
    M.act x
      (Superoperator.comp (Superoperator.tensorRightUnitor m)
        (Superoperator.tensor (Superoperator.identity m) q))
  map_zero_left := by
    intro m n q
    exact M.act_zero_element _
  map_zero_right := by
    intro m n x
    change M.act x
      (Superoperator.comp (Superoperator.tensorRightUnitor m)
        (Superoperator.tensor (Superoperator.identity m)
          (0 : Superoperator n 1))) = 0
    rw [Superoperator.tensor_zero_right,
      Superoperator.comp_zero_right, M.act_zero_map]
  map_sum_left := by
    intro ? _ m n x s q h
    exact M.act_sum_element _ h
  map_sum_right := by
    intro ? _ m n x q s h
    apply M.act_sum_map x
    exact SigmaMon.ChoiSum.comp_left _ <|
      SigmaMon.ChoiSum.tensor_hasSum_right (Superoperator.identity m) h
  naturality := by
    intro m' m n' n x q f g
    change Superoperator n 1 at q
    change
      M.act (M.act x f)
        (Superoperator.comp (Superoperator.tensorRightUnitor m')
          (Superoperator.tensor (Superoperator.identity m')
            (Superoperator.comp q g))) =
      M.act
        (M.act x
          (Superoperator.comp (Superoperator.tensorRightUnitor m)
            (Superoperator.tensor (Superoperator.identity m) q)))
        (Superoperator.tensor f g)
    rw [M.act_comp, M.act_comp]
    congr 1
    calc
      Superoperator.comp f
        (Superoperator.comp (Superoperator.tensorRightUnitor m')
          (Superoperator.tensor (Superoperator.identity m')
            (Superoperator.comp q g))) =
      Superoperator.comp (Superoperator.tensorRightUnitor m)
        (Superoperator.tensor f (Superoperator.comp q g)) := by
        rw [Superoperator.comp_assoc,
          <- Superoperator.tensorRightUnitor_naturality f,
          <- Superoperator.comp_assoc,
          <- Superoperator.tensor_comp]
        simp
      _ = Superoperator.comp
        (Superoperator.comp (Superoperator.tensorRightUnitor m)
```



```

(Superoperator.tensor (Superoperator.identity m) q))
(Superoperator.tensor f g) := by
  rw [ <- Superoperator.comp_assoc,
        <- Superoperator.tensor_comp]
  simp

```

#### 4.4.687 Right unitor of the genuine Day tensor

**Definition.** Right unitor of the genuine Day tensor.

**Construction.** Defined to be the lift of the right unitor bilinear map of  $M$ .

**Lean 4 source** [QLambda/Domain/Presheaf/DayTensorBasic.lean](#)

```

noncomputable def rightUnitor (M : Module) :
  Hom (dayTensor M dayTensorUnit) M :=
  DayCoend.lift (rightUnitorBilinear M)

```

#### 4.4.688 The right unitor on an introduced element

**Statement.** For a superoperator module  $M$ , natural numbers  $m, n$ , a superoperator  $q$ :  $(\text{rightUnitor } M).\text{app } (m * n) ((\text{DayCoend.intro } M \text{ dayTensorUnit}).\text{app } x \text{ } q)$  equals the act of  $x$  and the composite of  $\text{Superoperator.tensorRightUnitor } m$  after  $\text{Superoperator.tensor } (\text{Superoperator.identity } m) \text{ } q$ .

**Proof.** This is an instance of the evaluation on an introduced element.

**Lean 4 source** [QLambda/Domain/Presheaf/DayTensorBasic.lean](#)

```

theorem rightUnitor_intro {M : Module} {m n : Nat}
  (x : (M.obj m).Carrier) (q : Superoperator n 1) :
  (rightUnitor M).app (m * n)
    ((DayCoend.intro M dayTensorUnit).app x q) =
  M.act x
    (Superoperator.comp (Superoperator.tensorRightUnitor m)
      (Superoperator.tensor (Superoperator.identity m) q)) :=
  DayCoend.evaluate_intro (rightUnitorBilinear M) x q

```

#### 4.4.689 The nested universal map underlying Day tensor reassociation

**Definition.** The nested universal map underlying Day tensor reassociation.

**Construction.** Constructed by supplying each component: application, functorial action zero left, functorial action zero right, functorial action sum left, functorial action sum right and naturality, among others. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/Presheaf/DayTensorCoherence.lean](#)

```

noncomputable def associatorBilinear (M N P : Module) :
  Bilinear M N
    (dayInternalHom P (dayTensor M (dayTensor N P))) where
  app := fun {m n} x y =>
    { app := fun {k p} r z =>

```

```

    (dayTensor M (dayTensor N P)).act
      ((DayCoend.intro M (dayTensor N P)).app x
        ((DayCoend.intro N P).app y z))
      (Superoperator.comp (Superoperator.tensorAssociator m n p)
        (Superoperator.tensor r (Superoperator.identity p)))
map_zero_left := by
  intro k p z
  change
    (dayTensor M (dayTensor N P)).act
      ((DayCoend.intro M (dayTensor N P)).app x
        ((DayCoend.intro N P).app y z))
      (Superoperator.comp (Superoperator.tensorAssociator m n p)
        (Superoperator.tensor (0 : Superoperator k (m * n))
          (Superoperator.identity p))) = 0
  rw [Superoperator.tensor_zero_left,
    Superoperator.comp_zero_right,
    (dayTensor M (dayTensor N P)).act_zero_map]
map_zero_right := by
  intro k p r
  rw [(DayCoend.intro N P).map_zero_right,
    (DayCoend.intro M (dayTensor N P)).map_zero_right,
    (dayTensor M (dayTensor N P)).act_zero_element]
map_sum_left := by
  intro ? _ k p r s z h
  apply (dayTensor M (dayTensor N P)).act_sum_map _
  exact SigmaMon.ChoiSum.comp_left _ <|
    SigmaMon.ChoiSum.tensor_hasSum_left h
    (Superoperator.identity p)
map_sum_right := by
  intro ? _ k p r z s h
  exact (dayTensor M (dayTensor N P)).act_sum_element _ <|
    (DayCoend.intro M (dayTensor N P)).map_sum_right x <|
    (DayCoend.intro N P).map_sum_right y h
naturalness := by
  intro k' k p' p r z f g
  change Superoperator k (m * n) at r
  change
    (dayTensor M (dayTensor N P)).act
      ((DayCoend.intro M (dayTensor N P)).app x
        ((DayCoend.intro N P).app y (P.act z g)))
      (Superoperator.comp
        (Superoperator.tensorAssociator m n p')
        (Superoperator.tensor (Superoperator.comp r f)
          (Superoperator.identity p'))) =
    (dayTensor M (dayTensor N P)).act
      ((dayTensor M (dayTensor N P)).act
        ((DayCoend.intro M (dayTensor N P)).app x
          ((DayCoend.intro N P).app y z))
        (Superoperator.comp
          (Superoperator.tensorAssociator m n p)
          (Superoperator.tensor r (Superoperator.identity p))))
      (Superoperator.tensor f g)
  have hn := (DayCoend.intro N P).naturalness y z
  (Superoperator.identity n) g
  simp only [N.act_id] at hn
  rw [hn]

```

```

have hm := (DayCoend.intro M (dayTensor N P)).naturalness x
  ((DayCoend.intro N P).app y z)
  (Superoperator.identity m)
  (Superoperator.tensor (Superoperator.identity n) g)
simp only [M.act_id] at hm
rw [hm,
  (dayTensor M (dayTensor N P)).act_comp,
  (dayTensor M (dayTensor N P)).act_comp]
congr 1
rw [Superoperator.comp_assoc,
  <- Superoperator.tensorAssociator_naturalness
    (Superoperator.identity m) (Superoperator.identity n) g,
  <- Superoperator.comp_assoc]
rw [ <- Superoperator.tensor_comp]
simp
rw [ <- Superoperator.comp_assoc,
  <- Superoperator.tensor_comp]
simp }
map_zero_left := by
  intro m n y
  apply Bilinear.ext
  intro k p r z
  change Superoperator k (m * n) at r
  change
    (dayTensor M (dayTensor N P)).act
      ((DayCoend.intro M (dayTensor N P)).app
        (0 : (M.obj m).Carrier)
        ((DayCoend.intro N P).app y z))
      (Superoperator.comp (Superoperator.tensorAssociator m n p)
        (Superoperator.tensor r (Superoperator.identity p))) = 0
  rw [(DayCoend.intro M (dayTensor N P)).map_zero_left,
    (dayTensor M (dayTensor N P)).act_zero_element]
map_zero_right := by
  intro m n x
  apply Bilinear.ext
  intro k p r z
  change Superoperator k (m * n) at r
  change
    (dayTensor M (dayTensor N P)).act
      ((DayCoend.intro M (dayTensor N P)).app x
        ((DayCoend.intro N P).app
          (0 : (N.obj n).Carrier) z))
      (Superoperator.comp (Superoperator.tensorAssociator m n p)
        (Superoperator.tensor r (Superoperator.identity p))) = 0
  rw [(DayCoend.intro N P).map_zero_left,
    (DayCoend.intro M (dayTensor N P)).map_zero_right,
    (dayTensor M (dayTensor N P)).act_zero_element]
map_sum_left := by
  intro ? _ m n x s y h k p r z
  exact (dayTensor M (dayTensor N P)).act_sum_element _ <|
    (DayCoend.intro M (dayTensor N P)).map_sum_left _ h
map_sum_right := by
  intro ? _ m n x y s h k p r z
  exact (dayTensor M (dayTensor N P)).act_sum_element _ <|
    (DayCoend.intro M (dayTensor N P)).map_sum_right x <|
    (DayCoend.intro N P).map_sum_left z h

```

```

natrality := by
  intro m' m n' n x y f g
  apply Bilinear.ext
  intro k p r z
  change Superoperator k (m' * n') at r
  simp only [dayInternalHom, DayInternalHom.module,
    DayInternalHom.precompose]
  have hn := (DayCoend.intro N P).natrality y z g
    (Superoperator.identity p)
  simp only [P.act_id] at hn
  rw [hn]
  have hm := (DayCoend.intro M (dayTensor N P)).natrality x
    ((DayCoend.intro N P).app y z) f
    (Superoperator.tensor g (Superoperator.identity p))
  rw [hm, (dayTensor M (dayTensor N P)).act_comp]
  congr 1
  rw [Superoperator.comp_assoc,
    <- Superoperator.tensorAssociator_natrality f g
      (Superoperator.identity p),
    <- Superoperator.comp_assoc]
  rw [ <- Superoperator.tensor_comp]
  simp

```

#### 4.4.690 Associator of the genuine Day tensor, obtained by two applications of the coend universal property and currying

**Definition.** Associator of the genuine Day tensor, obtained by two applications of the coend universal property and currying.

**Construction.** Defined to be the lift of the uncurrying of `DayCoend.lift (associator Bilinear M N P)`.

**Lean 4 source** `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```

noncomputable def associator (M N P : Module) :
  Hom (dayTensor (dayTensor M N) P)
    (dayTensor M (dayTensor N P)) :=
  DayCoend.lift
    (DayInternalHom.uncurry
      (DayCoend.lift (associatorBilinear M N P)))

```

#### 4.4.691 The associator on an introduced element, at an introduced element

**Statement.** For superoperator modules  $M, N, P$ , natural numbers  $m, n, p$ : an explicit expression in the associator, the introduction and the Day tensor product equals an explicit expression in the Day tensor product, the introduction and the tensor associator.

**Proof.** The key step rewrites with the evaluation on an introduced element, the tensor product of an identity and the composition of the identity for superoperators.

**Lean 4 source** `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```

theorem associator_intro_intro {M N P : Module}

```

```

{m n p : Nat} (x : (M.obj m).Carrier)
(y : (N.obj n).Carrier) (z : (P.obj p).Carrier) :
(associator M N P).app ((m * n) * p)
  ((DayCoend.intro (dayTensor M N) P).app
    ((DayCoend.intro M N).app x y) z) =
(dayTensor M (dayTensor N P)).act
  ((DayCoend.intro M (dayTensor N P)).app x
    ((DayCoend.intro N P).app y z))
(Superoperator.tensorAssociator m n p) := by
change
  DayCoend.evaluate (dayTensor M (dayTensor N P))
    (DayInternalHom.uncurry
      (DayCoend.lift (associatorBilinear M N P)))
    ((DayCoend.intro (dayTensor M N) P).app
      ((DayCoend.intro M N).app x y) z) = _
rw [DayCoend.evaluate_intro]
change
  ((DayCoend.lift (associatorBilinear M N P)).app (m * n)
    ((DayCoend.intro M N).app x y)).app
    (Superoperator.identity (m * n)) z = _
change
  (DayCoend.evaluate
    (dayInternalHom P (dayTensor M (dayTensor N P)))
    (associatorBilinear M N P)
    ((DayCoend.intro M N).app x y)).app
    (Superoperator.identity (m * n)) z = _
rw [DayCoend.evaluate_intro]
change
  (dayTensor M (dayTensor N P)).act
    ((DayCoend.intro M (dayTensor N P)).app x
      ((DayCoend.intro N P).app y z))
    (Superoperator.comp (Superoperator.tensorAssociator m n p)
      (Superoperator.tensor (Superoperator.identity (m * n))
        (Superoperator.identity p))) =
_
rw [Superoperator.tensor_identity, Superoperator.comp_identity]

```

#### 4.4.692 Inverse Day associator, expressed by the canonical symmetric-braided path using forward associators

**Definition.** Inverse Day associator, expressed by the canonical symmetric-braided path using forward associators.

**Construction.** Defined by an explicit formula built from the composition, the braiding, the Day tensor product and the associator.

**Lean 4 source** [QLambda/Domain/Presheaf/DayTensorCoherence.lean](#)

```

noncomputable def associatorInv (M N P : Module) :
  Hom (dayTensor M (dayTensor N P))
    (dayTensor (dayTensor M N) P) :=
Hom.comp (braiding P (dayTensor M N))
  (Hom.comp (associator P M N)
    (Hom.comp (braiding N (dayTensor P M))
      (Hom.comp (associator N P M))

```

```
(braiding M (dayTensor N P))))
```

#### 4.4.693 The inverse associator on an introduced element, at an introduced element

**Statement.** For superoperator modules  $M, N, P$ , natural numbers  $m, n, p$ : an explicit expression in the inverse associator, the introduction and the Day tensor product equals an explicit expression in the Day tensor product, the introduction and the inverse tensor associator.

**Proof.** The key step rewrites with the definition of the inverse associator, the components of the composition, the braiding on an introduced element and the associator on an introduced element, at an introduced element.

#### Lean 4 source `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```
theorem associatorInv_intro_intro {M N P : Module}
  {m n p : Nat} (x : (M.obj m).Carrier)
  (y : (N.obj n).Carrier) (z : (P.obj p).Carrier) :
  (associatorInv M N P).app (m * (n * p))
    ((DayCoend.intro M (dayTensor N P)).app x
      ((DayCoend.intro N P).app y z)) =
  (dayTensor (dayTensor M N) P).act
    ((DayCoend.intro (dayTensor M N) P).app
      ((DayCoend.intro M N).app x y) z)
    (Superoperator.tensorAssociatorInv m n p) := by
  rw [associatorInv, Hom.comp_app, Hom.comp_app, Hom.comp_app,
    Hom.comp_app, braiding_intro,
    (associator N P M).naturality, associator_intro_intro,
    (dayTensor N (dayTensor P M)).act_comp,
    (braiding N (dayTensor P M)).naturality, braiding_intro,
    (dayTensor (dayTensor P M) N).act_comp,
    (associator P M N).naturality, associator_intro_intro,
    (dayTensor P (dayTensor M N)).act_comp,
    (braiding P (dayTensor M N)).naturality, braiding_intro,
    (dayTensor (dayTensor M N) P).act_comp,
    Superoperator.tensorAssociatorInv_braiding]
```

#### 4.4.694 The braiding is an involution

**Statement.** For superoperator modules  $M, N$ : the composite of the braiding of  $N$  and  $M$  after the braiding of  $M$  and  $N$  equals the identity of the Day tensor product of  $M$  and  $N$ .

**Proof.** The key step rewrites with the components of the composition, the braiding on an introduced element, the fact that the tensor swap is an involution and the fact that extensionality for maps out of a Day tensor: it is enough to check coend generators.

#### Lean 4 source `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```
theorem braiding_involutive (M N : Module) :
  Hom.comp (braiding N M) (braiding M N) =
  Hom.id (dayTensor M N) := by
  apply hom_ext
  intro m n x y
  rw [Hom.comp_app, braiding_intro,
```

```

    (braiding N M).naturality, braiding_intro,
    (dayTensor M N).act_comp,
    Superoperator.tensorSwap_involutive,
    (dayTensor M N).act_id]
rfl

```

#### 4.4.695 Extensionality for maps out of a left-associated triple Day tensor

**Statement.** Extensionality for maps out of a left-associated triple Day tensor. Formally:  $f = g$ .

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the hypothesis that for every  $m, n, p$ ,  $(x$ , an explicit expression in the application, the introduction and the Day tensor product equals an explicit expression in the application, the introduction and the Day tensor product, the definition of the universal equivalence, the definition of the currying equivalence and the fact that extensionality for maps out of a Day tensor: it is enough to check coend generators.

#### Lean 4 source `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```

theorem hom_ext_nested_left {M N P L : Module.{0}}
  {f g : Hom (dayTensor (dayTensor M N) P) L}
  (h : forall m n p (x : (M.obj m).Carrier)
    (y : (N.obj n).Carrier) (z : (P.obj p).Carrier),
    f.app ((m * n) * p)
      ((DayCoend.intro (dayTensor M N) P).app
        ((DayCoend.intro M N).app x y) z) =
      g.app ((m * n) * p)
        ((DayCoend.intro (dayTensor M N) P).app
          ((DayCoend.intro M N).app x y) z)) :
  f = g := by
  apply (DayCoend.universalEquiv (dayTensor M N) P L).injective
  apply (DayInternalHom.curryEquiv (dayTensor M N) P L).injective
  apply hom_ext
  intro m n x y
  apply Bilinear.ext
  intro k p r z
  change Superoperator.k (m * n) at r
  change
    f.app (k * p)
      ((DayCoend.intro (dayTensor M N) P).app
        ((dayTensor M N).act ((DayCoend.intro M N).app x y) r) z) =
    g.app (k * p)
      ((DayCoend.intro (dayTensor M N) P).app
        ((dayTensor M N).act ((DayCoend.intro M N).app x y) r) z)
  have hi := (DayCoend.intro (dayTensor M N) P).naturality
    ((DayCoend.intro M N).app x y) z r
    (Superoperator.identity p)
  simp only [P.act_id] at hi
  rw [hi, f.naturality, g.naturality, h]

```

#### 4.4.696 Extensionality for maps out of a right-associated triple Day tensor

**Statement.** Extensionality for maps out of a right-associated triple Day tensor. Formally:  $f = g$ .

**Proof.** The key step rewrites with the components of the composition, the braiding on an introduced element, the hypothesis that for every  $m, n, p$ ,  $(x, \text{an explicit expression in the application, the introduction and the Day tensor product equals an explicit expression in the application, the introduction and the Day tensor product and the fact that composition for module morphisms is associative.$

#### Lean 4 source `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```
theorem hom_ext_nested_right {M N P L : Module.{0}}
  {f g : Hom (dayTensor M (dayTensor N P)) L}
  (h : forall m n p (x : (M.obj m).Carrier)
    (y : (N.obj n).Carrier) (z : (P.obj p).Carrier),
    f.app (m * (n * p))
      ((DayCoend.intro M (dayTensor N P)).app x
        ((DayCoend.intro N P).app y z)) =
      g.app (m * (n * p))
        ((DayCoend.intro M (dayTensor N P)).app x
          ((DayCoend.intro N P).app y z))) :
  f = g := by
have hs :
  Hom.comp f (braiding (dayTensor N P) M) =
  Hom.comp g (braiding (dayTensor N P) M) := by
  apply hom_ext_nested_left
  intro n p m y z x
  rw [Hom.comp_app, Hom.comp_app, braiding_intro,
    f.naturality, g.naturality, h]
have hs' := congrArg
  (fun q => Hom.comp q (braiding M (dayTensor N P))) hs
rw [ <- Hom.comp_assoc, braiding_involutive, Hom.comp_id] at hs'
rw [ <- Hom.comp_assoc, braiding_involutive, Hom.comp_id] at hs'
exact hs'
```

#### 4.4.697 Extensionality for maps out of a fully left-associated fourfold Day tensor

**Statement.** Extensionality for maps out of a fully left-associated fourfold Day tensor. Formally:  $f = g$ .

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the hypothesis that for every  $m, n, p, q$ ,  $(x, \text{an explicit expression in the application, the introduction and the Day tensor product equals an explicit expression in the application, the introduction and the Day tensor product, the definition of the universal equivalence, the definition of the currying equivalence and the extensionality for maps out of a left-associated triple Day tensor.$

#### Lean 4 source `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```
theorem hom_ext_nested_four {M N P Q L : Module.{0}}
  {f g : Hom
    (dayTensor (dayTensor (dayTensor M N) P) Q) L}
  (h : forall m n p q (x : (M.obj m).Carrier)
    (y : (N.obj n).Carrier) (z : (P.obj p).Carrier)
    (w : (Q.obj q).Carrier),
    f.app ((m * n) * p) * q
      ((DayCoend.intro (dayTensor (dayTensor M N) P) Q).app
        ((DayCoend.intro (dayTensor M N) P).app
          ((DayCoend.intro M N).app x y) z) w) =
      g.app ((m * n) * p) * q
```



```

      ((DayCoend.intro (dayTensor (dayTensor M N) P) Q).app
        ((DayCoend.intro (dayTensor M N) P).app
          ((DayCoend.intro M N).app x y) z) w)) :
  f = g := by
  apply (DayCoend.universalEquiv
    (dayTensor (dayTensor M N) P) Q L).injective
  apply (DayInternalHom.curryEquiv
    (dayTensor (dayTensor M N) P) Q L).injective
  apply hom_ext_nested_left
  intro m n p x y z
  apply Bilinear.ext
  intro k q r w
  change Superoperator k ((m * n) * p) at r
  change
    f.app (k * q)
      ((DayCoend.intro (dayTensor (dayTensor M N) P) Q).app
        ((dayTensor (dayTensor M N) P).act
          ((DayCoend.intro (dayTensor M N) P).app
            ((DayCoend.intro M N).app x y) z) r) w) =
    g.app (k * q)
      ((DayCoend.intro (dayTensor (dayTensor M N) P) Q).app
        ((dayTensor (dayTensor M N) P).act
          ((DayCoend.intro (dayTensor M N) P).app
            ((DayCoend.intro M N).app x y) z) r) w)
  have hi :=
    (DayCoend.intro (dayTensor (dayTensor M N) P) Q).naturality
      ((DayCoend.intro (dayTensor M N) P).app
        ((DayCoend.intro M N).app x y) z) w r
      (Superoperator.identity q)
  simp only [Q.act_id] at hi
  rw [hi, f.naturality, g.naturality, h]

```

#### 4.4.698 The associator and its inverse compose to the identity

**Statement.** For superoperator modules  $M, N, P$ : the composite of the associator of  $M, N, P$  after the inverse associator of  $M, N, P$  equals the identity of the Day tensor product of  $M$  and  $\text{dayTensor } N \ P$ .

**Proof.** The key step rewrites with the components of the composition, the inverse associator on an introduced element, at an introduced element, the associator on an introduced element, at an introduced element and the fact that the tensor associator and its inverse compose to the identity.

#### Lean 4 source `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```

theorem associator_hom_inv (M N P : Module) :
  Hom.comp (associator M N P) (associatorInv M N P) =
    Hom.id (dayTensor M (dayTensor N P)) := by
  apply hom_ext_nested_right
  intro m n p x y z
  rw [Hom.comp_app, associatorInv_intro_intro,
    (associator M N P).naturality, associator_intro_intro,
    (dayTensor M (dayTensor N P)).act_comp,
    Superoperator.tensorAssociator_hom_inv,
    (dayTensor M (dayTensor N P)).act_id]
  rfl

```

#### 4.4.699 The associator and its inverse compose to the identity

**Statement.** For superoperator modules  $M, N, P$ : the composite of the inverse associator of  $M, N, P$  after the associator of  $M, N, P$  equals the identity of the Day tensor product of  $\text{dayTensor } M \ N$  and  $P$ .

**Proof.** The key step rewrites with the components of the composition, the associator on an introduced element, at an introduced element, the inverse associator on an introduced element, at an introduced element and the fact that the tensor associator and its inverse compose to the identity.

**Lean 4 source** [QLambda/Domain/Presheaf/DayTensorCoherence.lean](#)

```
theorem associator_inv_hom (M N P : Module) :
  Hom.comp (associatorInv M N P) (associator M N P) =
    Hom.id (dayTensor (dayTensor M N) P) := by
  apply hom_ext_nested_left
  intro m n p x y z
  rw [Hom.comp_app, associator_intro_intro,
    (associatorInv M N P).naturality, associatorInv_intro_intro,
    (dayTensor (dayTensor M N) P).act_comp,
    Superoperator.tensorAssociator_inv_hom,
    (dayTensor (dayTensor M N) P).act_id]
  rfl
```

#### 4.4.700 Associator isomorphism for Day convolution

**Definition.** Associator isomorphism for Day convolution.

**Construction.** Constructed by supplying each component: morphism, inverse, morphism inverse and inverse morphism. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/Presheaf/DayTensorCoherence.lean](#)

```
noncomputable def associatorIso (M N P : Module) :
  Iso (dayTensor (dayTensor M N) P)
    (dayTensor M (dayTensor N P)) where
  hom := associator M N P
  inv := associatorInv M N P
  hom_inv := associator_hom_inv M N P
  inv_hom := associator_inv_hom M N P
```

#### 4.4.701 Naturality of the associator

**Statement.** For superoperator modules  $M, M', N, N', P, P'$ , module morphisms  $f, g$ : if  $\text{Hom } P \ P'$ , then the composite of the associator of  $M', N', P'$  after the functorial action of  $\text{map } f \ g$  and  $h$  equals the composite of the functorial action of  $f$  and  $\text{map } g \ h$  after the associator of  $M, N, P$ .

**Proof.** The key step rewrites with the components of the composition, the functorial action on an introduced element, the associator on an introduced element, at an introduced element and the extensionality for maps out of a left-associated triple Day tensor.

**Lean 4 source** [QLambda/Domain/Presheaf/DayTensorCoherence.lean](#)

```
theorem associator_naturality
  {M M' N N' P P' : Module}
```

```

(f : Hom M M') (g : Hom N N') (h : Hom P P') :
Hom.comp (associator M' N' P')
  (map (map f g) h) =
Hom.comp (map f (map g h))
  (associator M N P) := by
apply hom_ext_nested_left
intro m n p x y z
rw [Hom.comp_app, Hom.comp_app, map_intro, map_intro,
  associator_intro_intro, associator_intro_intro,
  (map f (map g h)).naturality, map_intro, map_intro]

```

#### 4.4.702 Naturality of the braiding

**Statement.** For superoperator modules  $M, M', N, N'$ , module morphisms  $f, g$ : the composite of the braiding of  $M'$  and  $N'$  after the functorial action of  $f$  and  $g$  equals the composite of the functorial action of  $g$  and  $f$  after the braiding of  $M$  and  $N$ .

**Proof.** The key step rewrites with the components of the composition, the functorial action on an introduced element, the braiding on an introduced element and the fact that extensionality for maps out of a Day tensor: it is enough to check coend generators.

**Lean 4 source** [QLambda/Domain/Presheaf/DayTensorCoherence.lean](#)

```

theorem braiding_naturality
  {M M' N N' : Module} (f : Hom M M') (g : Hom N N') :
Hom.comp (braiding M' N') (map f g) =
Hom.comp (map g f) (braiding M N) := by
apply hom_ext
intro m n x y
rw [Hom.comp_app, Hom.comp_app, map_intro, braiding_intro,
  braiding_intro, (map g f).naturality, map_intro]

```

#### 4.4.703 Pentagon for Day tensor products

**Statement.** For superoperator modules  $M, N, P, Q$ : the composite of the associator of  $M, N, \text{dayTensor } P \ Q$  after the associator of  $\text{dayTensor } M \ N, P, Q$  equals the composite of the functorial action of  $\text{Hom} . \text{id } M$  and associator  $N \ P \ Q$  after the composite of associator  $M \ (\text{dayTensor } N \ P) \ Q$  after  $\text{map } (\text{associator } M \ N \ P) \ (\text{Hom} . \text{id } Q)$ .

**Proof.** The key step rewrites with the components of the composition, the associator on an introduced element, at an introduced element, the functorial action on an introduced element and the components of the identity.

**Lean 4 source** [QLambda/Domain/Presheaf/DayTensorCoherence.lean](#)

```

theorem pentagon (M N P Q : Module) :
Hom.comp (associator M N (dayTensor P Q))
  (associator (dayTensor M N) P Q) =
Hom.comp (map (Hom.id M) (associator N P Q))
  (Hom.comp (associator M (dayTensor N P) Q)
    (map (associator M N P) (Hom.id Q))) := by
apply hom_ext_nested_four
intro m n p q x y z w

```

```

rw [Hom.comp_app,
    associator_intro_intro,
    (associator M N (dayTensor P Q)).naturality,
    associator_intro_intro,
    (dayTensor M (dayTensor N (dayTensor P Q))).act_comp,
    Hom.comp_app, Hom.comp_app, map_intro, associator_intro_intro,
    Hom.id_app]
have hi :=
  (DayCoend.intro (dayTensor M (dayTensor N P)) Q).naturality
  ((DayCoend.intro M (dayTensor N P)).app x
   ((DayCoend.intro N P).app y z)) w
  (Superoperator.tensorAssociator m n p)
  (Superoperator.identity q)
simp only [Q.act_id] at hi
rw [hi,
    (associator M (dayTensor N P) Q).naturality,
    associator_intro_intro,
    (dayTensor M (dayTensor (dayTensor N P) Q)).act_comp,
    (map (Hom.id M) (associator N P Q)).naturality,
    map_intro, associator_intro_intro, Hom.id_app]
have hj :=
  (DayCoend.intro M (dayTensor N (dayTensor P Q))).naturality
  x ((DayCoend.intro N (dayTensor P Q)).app y
   ((DayCoend.intro P Q).app z w))
  (Superoperator.identity m)
  (Superoperator.tensorAssociator n p q)
simp only [M.act_id] at hj
rw [hj,
    (dayTensor M (dayTensor N (dayTensor P Q))).act_comp,
    Superoperator.tensor_pentagon]

```

#### 4.4.704 Triangle for Day tensor products

**Statement.** For superoperator modules  $M, N$ : the composite of the functorial action of  $\text{Hom.id } M$  and left Unitor  $N$  after the associator of  $M$ ,  $\text{dayTensorUnit}, N$  equals the functorial action of the right unitor of  $M$  and the identity of  $N$ .

**Proof.** The key step rewrites with the components of the composition, the associator on an introduced element, at an introduced element, the functorial action on an introduced element and the left unitor on an introduced element.

#### Lean 4 source `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```

theorem triangle (M N : Module) :
  Hom.comp (map (Hom.id M) (leftUnitor N))
    (associator M dayTensorUnit N) =
    map (rightUnitor M) (Hom.id N) := by
  apply hom_ext_nested_left
  intro m u n x q z
  rw [Hom.comp_app, associator_intro_intro,
      (map (Hom.id M) (leftUnitor N)).naturality,
      map_intro]
  change Superoperator u 1 at q
  rw [leftUnitor_intro, Hom.id_app,
      map_intro, rightUnitor_intro, Hom.id_app]

```

```

have h1 :=
  (DayCoend.intro M N).naturality x z
  (Superoperator.identity m)
  (Superoperator.comp (Superoperator.tensorLeftUnitor n)
    (Superoperator.tensor q (Superoperator.identity n)))
simp only [M.act_id] at h1
rw [h1, (dayTensor M N).act_comp]
have hr :=
  (DayCoend.intro M N).naturality x z
  (Superoperator.comp (Superoperator.tensorRightUnitor m)
    (Superoperator.tensor (Superoperator.identity m) q))
  (Superoperator.identity n)
simp only [N.act_id] at hr
rw [hr, Superoperator.tensor_triangle_naturality]

```

#### 4.4.705 Right-unitor / associator coherence: $(\text{id} \otimes \rho) \circ \alpha = \rho$

**Statement.** Right-unitor / associator coherence:  $(\text{id} \otimes \rho) \circ \alpha = \rho$ . Formally:  $\text{Hom.comp} (\text{map} (\text{Hom.id } M) (\text{rightUnitor } N)) (\text{associator } M \ N \ \text{dayTensorUnit}) = \text{rightUnitor } (\text{dayTensor } M \ N)$ .

**Proof.** The key step rewrites with the components of the composition, the associator on an introduced element, at an introduced element, the functorial action on an introduced element and the right unitor on an introduced element.

#### Lean 4 source `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```

theorem rightUnitor_associator (M N : Module) :
  Hom.comp (map (Hom.id M) (rightUnitor N))
    (associator M N dayTensorUnit) =
    rightUnitor (dayTensor M N) := by
  apply hom_ext_nested_left
  intro m n u x y q
  rw [Hom.comp_app, associator_intro_intro,
    (map (Hom.id M) (rightUnitor N)).naturality, map_intro]
  change Superoperator u 1 at q
  rw [rightUnitor_intro, Hom.id_app, rightUnitor_intro]
  have h1 :=
    (DayCoend.intro M N).naturality x y
    (Superoperator.identity m)
    (Superoperator.comp (Superoperator.tensorRightUnitor n)
      (Superoperator.tensor (Superoperator.identity n) q))
  simp only [M.act_id] at h1
  rw [h1, (dayTensor M N).act_comp]
  congr 1
  exact Superoperator.tensor_rightUnitor_associator_naturality m n q

```

#### 4.4.706 Inverse form: $\rho \circ \alpha^{-1} = \text{id} \otimes \rho$

**Statement.** Inverse form:  $\rho \circ \alpha^{-1} = \text{id} \otimes \rho$ . Formally:  $\text{Hom.comp} (\text{rightUnitor } (\text{dayTensor } M \ N)) (\text{associatorInv } M \ N \ \text{dayTensorUnit}) = \text{map} (\text{Hom.id } M) (\text{rightUnitor } N)$ .

**Proof.** It follows from the transitivity for semantic equalities of circuits and the fact that the identity is a right unit for composition for module morphisms.

#### Lean 4 source `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```
theorem rightUnitor_associatorInv (M N : Module) :
  Hom.comp (rightUnitor (dayTensor M N))
    (associatorInv M N dayTensorUnit) =
  map (Hom.id M) (rightUnitor N) := by
  have h :=
    congrArg (fun g => Hom.comp g (associatorInv M N dayTensorUnit))
      (rightUnitor_associator M N)
  -- From `(id ? ?) comp a comp a^-1 = ? comp a^-1`, reverse to start from `?
  comp a^-1`.
  refine Eq.trans h.symm ?_
  refine Eq.trans (Hom.comp_assoc _ _ _) ?_
  refine Eq.trans
    (congrArg (Hom.comp (map (Hom.id M) (rightUnitor N)))
      (associator_hom_inv M N dayTensorUnit)) ?_
  exact Hom.comp_id _
```

### 4.4.707 Hexagon for Day tensor products

**Statement.** For superoperator modules  $M, N, P$ : the composite of the braiding of  $M$  and  $\text{dayTensor } N \ P$  after the associator of  $M, N, P$  equals an explicit expression in the composition, the inverse associator, the functorial action and the braiding.

**Proof.** The key step rewrites with the components of the composition, the associator on an introduced element, at an introduced element, the braiding on an introduced element and the functorial action on an introduced element.

#### Lean 4 source `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```
theorem hexagon (M N P : Module) :
  Hom.comp (braiding M (dayTensor N P))
    (associator M N P) =
  Hom.comp (associatorInv N P M)
    (Hom.comp (map (Hom.id N) (braiding M P))
      (Hom.comp (associator N M P)
        (map (braiding M N) (Hom.id P))))) := by
  apply hom_ext_nested_left
  intro m n p x y z
  rw [Hom.comp_app, associator_intro_intro,
    (braiding M (dayTensor N P)).naturality, braiding_intro,
    (dayTensor (dayTensor N P) M).act_comp,
    Hom.comp_app, Hom.comp_app, Hom.comp_app,
    map_intro, braiding_intro, Hom.id_app]
  have h_1 :=
    (DayCoend.intro (dayTensor N M) P).naturality
      ((DayCoend.intro N M).app y x) z
      (Superoperator.tensorSwap m n)
      (Superoperator.identity p)
  simp only [P.act_id] at h_1
  rw [h_1, (associator N M P).naturality,
    associator_intro_intro,
```

```

    (dayTensor N (dayTensor M P)).act_comp,
    (map (Hom.id N) (braiding M P)).naturality,
    map_intro, braiding_intro, Hom.id_app]
have h_2 :=
  (DayCoend.intro N (dayTensor P M)).naturality y
  ((DayCoend.intro P M).app z x)
  (Superoperator.identity n)
  (Superoperator.tensorSwap m p)
simp only [N.act_id] at h_2
rw [h_2, (dayTensor N (dayTensor P M)).act_comp,
    (associatorInv N P M).naturality,
    associatorInv_intro_intro,
    (dayTensor (dayTensor N P) M).act_comp,
    Superoperator.tensor_hexagon]

```

#### 4.4.708 Inverse to the left Day unitor

**Definition.** Inverse to the left Day unitor.

**Construction.** Constructed by supplying each component: application, functorial action zero, functorial action sum and naturality. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/Presheaf/DayTensorCoherence.lean](#)

```

noncomputable def leftUnitorInv (M : Module) :
  Hom M (dayTensor dayTensorUnit M) where
  app := fun n x =>
    (dayTensor dayTensorUnit M).act
    ((DayCoend.intro dayTensorUnit M).app
     (Superoperator.identity 1) x)
    (Superoperator.tensorLeftUnitorInv n)
  map_zero := by
    intro n
    change
      (dayTensor dayTensorUnit M).act
      ((DayCoend.intro dayTensorUnit M).app
       (show (dayTensorUnit.obj 1).Carrier from
            Superoperator.identity 1)
       (0 : (M.obj n).Carrier))
      (Superoperator.tensorLeftUnitorInv n) = 0
  rw [(DayCoend.intro dayTensorUnit M).map_zero_right,
      (dayTensor dayTensorUnit M).act_zero_element]
  map_sum := by
    intro ? _ n x s h
    exact (dayTensor dayTensorUnit M).act_sum_element _ <|
      (DayCoend.intro dayTensorUnit M).map_sum_right
      (Superoperator.identity 1) h
  naturality := by
    intro m n x f
    have hi := (DayCoend.intro dayTensorUnit M).naturality
      (Superoperator.identity 1) x
      (Superoperator.identity 1) f
    change
      (DayCoend.intro dayTensorUnit M).app
      (Superoperator.comp (Superoperator.identity 1)

```

```

      (Superoperator.identity 1)) (M.act x f) =
    (dayTensor dayTensorUnit M).act
      ((DayCoend.intro dayTensorUnit M).app
        (Superoperator.identity 1) x)
      (Superoperator.tensor (Superoperator.identity 1) f) at hi
  rw [Superoperator.identity_comp] at hi
  rw [hi, (dayTensor dayTensorUnit M).act_comp,
    (dayTensor dayTensorUnit M).act_comp,
    Superoperator.tensorLeftUnitorInv_naturality]

```

#### 4.4.709 Inverse to the right Day unitor

**Definition.** Inverse to the right Day unitor.

**Construction.** Constructed by supplying each component: application, functorial action zero, functorial action sum and naturality. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/Presheaf/DayTensorCoherence.lean](#)

```

noncomputable def rightUnitorInv (M : Module) :
  Hom M (dayTensor M dayTensorUnit) where
  app := fun n x =>
    (dayTensor M dayTensorUnit).act
      ((DayCoend.intro M dayTensorUnit).app x
        (Superoperator.identity 1))
      (Superoperator.tensorRightUnitorInv n)
  map_zero := by
    intro n
    change
      (dayTensor M dayTensorUnit).act
        ((DayCoend.intro M dayTensorUnit).app
          (0 : (M.obj n).Carrier)
          (show (dayTensorUnit.obj 1).Carrier from
            Superoperator.identity 1))
        (Superoperator.tensorRightUnitorInv n) = 0
  rw [(DayCoend.intro M dayTensorUnit).map_zero_left,
    (dayTensor M dayTensorUnit).act_zero_element]
  map_sum := by
    intro ? _ n x s h
    exact (dayTensor M dayTensorUnit).act_sum_element _ <|
      (DayCoend.intro M dayTensorUnit).map_sum_left
        (Superoperator.identity 1) h
  naturality := by
    intro m n x f
    have hi := (DayCoend.intro M dayTensorUnit).naturality x
      (Superoperator.identity 1) f
      (Superoperator.identity 1)
    change
      (DayCoend.intro M dayTensorUnit).app (M.act x f)
        (Superoperator.comp (Superoperator.identity 1)
          (Superoperator.identity 1)) =
      (dayTensor M dayTensorUnit).act
        ((DayCoend.intro M dayTensorUnit).app x
          (Superoperator.identity 1))
        (Superoperator.tensor f (Superoperator.identity 1)) at hi

```



```

rw [Superoperator.identity_comp] at hi
rw [hi, (dayTensor M dayTensorUnit).act_comp,
      (dayTensor M dayTensorUnit).act_comp,
      Superoperator.tensorRightUnitorInv_naturality]

```

#### 4.4.710 The left unitor and its inverse compose to the identity

**Statement.** For a superoperator module  $M$ : the composite of the left unitor of  $M$  after the inverse left unitor of  $M$  equals the identity of  $M$ .

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the components of the composition, the definition of the inverse left unitor, the left unitor on an introduced element and the tensor product of an identity.

##### Lean 4 source `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```

theorem leftUnitor_hom_inv (M : Module) :
  Hom.comp (leftUnitor M) (leftUnitorInv M) = Hom.id M := by
  apply Hom.ext
  intro n x
  rw [Hom.comp_app, leftUnitorInv, (leftUnitor M).naturality,
      leftUnitor_intro, M.act_comp]
  simp only [Superoperator.tensor_identity,
            Superoperator.comp_identity,
            Superoperator.tensorLeftUnitor_hom_inv, M.act_id]
  rfl

```

#### 4.4.711 The right unitor and its inverse compose to the identity

**Statement.** For a superoperator module  $M$ : the composite of the right unitor of  $M$  after the inverse right unitor of  $M$  equals the identity of  $M$ .

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the components of the composition, the definition of the inverse right unitor, the right unitor on an introduced element and the tensor product of an identity.

##### Lean 4 source `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```

theorem rightUnitor_hom_inv (M : Module) :
  Hom.comp (rightUnitor M) (rightUnitorInv M) = Hom.id M := by
  apply Hom.ext
  intro n x
  rw [Hom.comp_app, rightUnitorInv, (rightUnitor M).naturality,
      rightUnitor_intro, M.act_comp]
  simp only [Superoperator.tensor_identity,
            Superoperator.comp_identity,
            Superoperator.tensorRightUnitor_hom_inv, M.act_id]
  rfl

```

#### 4.4.712 Left-unitor isomorphism for Day convolution

**Definition.** Left-unitor isomorphism for Day convolution.

**Construction.** Constructed by supplying each component: morphism, inverse, morphism inverse and inverse morphism. The accompanying laws are verified from the definitions.

**Lean 4 source** `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```
noncomputable def leftUnitorIso (M : Module) :
  Iso (dayTensor dayTensorUnit M) M where
  hom := leftUnitor M
  inv := leftUnitorInv M
  hom_inv := leftUnitor_hom_inv M
  inv_hom := by
    apply hom_ext
    intro m n q x
    change Superoperator m 1 at q
    rw [Hom.comp_app, leftUnitor_intro,
      (leftUnitorInv M).naturality]
    change Superoperator m 1 at q
    rw [leftUnitorInv, (dayTensor dayTensorUnit M).act_comp]
    rw [Superoperator.comp_assoc,
      Superoperator.tensorLeftUnitor_inv_hom,
      Superoperator.identity_comp]
    have hi := (DayCoend.intro dayTensorUnit M).naturality
      (Superoperator.identity 1) x q (Superoperator.identity n)
    change
      (DayCoend.intro dayTensorUnit M).app
        (Superoperator.comp (Superoperator.identity 1) q)
        (M.act x (Superoperator.identity n)) =
      (dayTensor dayTensorUnit M).act
        ((DayCoend.intro dayTensorUnit M).app
          (Superoperator.identity 1) x)
        (Superoperator.tensor q (Superoperator.identity n)) at hi
    simpa only [Superoperator.identity_comp, M.act_id,
      Hom.id_app] using hi.symm
```

#### 4.4.713 Right-unitor isomorphism for Day convolution

**Definition.** Right-unitor isomorphism for Day convolution.

**Construction.** Constructed by supplying each component: morphism, inverse, morphism inverse and inverse morphism. The accompanying laws are verified from the definitions.

**Lean 4 source** `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```
noncomputable def rightUnitorIso (M : Module) :
  Iso (dayTensor M dayTensorUnit) M where
  hom := rightUnitor M
  inv := rightUnitorInv M
  hom_inv := rightUnitor_hom_inv M
  inv_hom := by
    apply hom_ext
    intro m n x q
    change Superoperator n 1 at q
    rw [Hom.comp_app, rightUnitor_intro,
      (rightUnitorInv M).naturality]
    change Superoperator n 1 at q
```

```

rw [rightUnitorInv, (dayTensor M dayTensorUnit).act_comp]
rw [Superoperator.comp_assoc,
    Superoperator.tensorRightUnitor_inv_hom,
    Superoperator.identity_comp]
have hi := (DayCoend.intro M dayTensorUnit).naturality x
          (Superoperator.identity 1) (Superoperator.identity m) q
change
  (DayCoend.intro M dayTensorUnit).app
    (M.act x (Superoperator.identity m))
    (Superoperator.comp (Superoperator.identity 1) q) =
  (dayTensor M dayTensorUnit).act
    ((DayCoend.intro M dayTensorUnit).app x
      (Superoperator.identity 1))
    (Superoperator.tensor (Superoperator.identity m) q) at hi
simp only [Superoperator.identity_comp, M.act_id,
  Hom.id_app] using hi.symm

```

#### 4.4.714 Braiding isomorphism for Day convolution

**Definition.** Braiding isomorphism for Day convolution.

**Construction.** Constructed by supplying each component: morphism, inverse, morphism inverse and inverse morphism. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/Presheaf/DayTensorCoherence.lean](#)

```

noncomputable def braidingIso (M N : Module) :
  Iso (dayTensor M N) (dayTensor N M) where
  hom := braiding M N
  inv := braiding N M
  hom_inv := braiding_involutive N M
  inv_hom := braiding_involutive M N

```

#### 4.4.715 Every index of a one-element Fin is zero

**Statement.** Every index of a one-element Fin is zero. Formally:  $i = 0$ .

**Proof.** It follows from standard identities for natural numbers.

**Lean 4 source** [QLambda/Domain/Presheaf/DayTensorCoherence.lean](#)

```

theorem fin_val_eq_zero_of_card_one {d : Nat} (hd : d = 1) (i : Fin d) :
  (i : Nat) = 0 := by
  have : (i : Nat) < 1 := hd |> i.isLt
  exact Nat.lt_one_iff.mp this

```

#### 4.4.716 Naturality of the left unitor

**Statement.** For superoperator modules  $M, N$ , a module morphism  $f$ : the composite of the left unitor of  $N$  after the functorial action of  $\text{Hom.id dayTensorUnit}$  and  $f$  equals the composite of  $f$  after the left unitor of  $M$ .

**Proof.** The key step rewrites with the functorial action on an introduced element, the components of the composition, the components of the identity and the fact that extensionality for maps out of a Day tensor: it is enough to check coend generators.

#### Lean 4 source `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```
theorem leftUnitor_natural {M N : Module} (f : Hom M N) :
  Hom.comp (DayTensor.leftUnitor N)
    (DayTensor.map (Hom.id dayTensorUnit) f) =
    Hom.comp f (DayTensor.leftUnitor M) := by
  apply DayTensor.hom_ext
  intro m n q x
  simp only [DayTensor.map_intro, Hom.comp_app, Hom.id_app]
  have hL := DayTensor.leftUnitor_intro (M := N) q (f.app n x)
  have hR := DayTensor.leftUnitor_intro (M := M) q x
  change
    (DayTensor.leftUnitor N).app (m * n)
      ((DayCoend.intro dayTensorUnit N).app q (f.app n x)) =
      f.app (m * n)
      ((DayTensor.leftUnitor M).app (m * n)
        ((DayCoend.intro dayTensorUnit M).app q x))
  rw [hL, hR, f.naturality]
```

#### 4.4.717 Naturality of the inverse left unitor

**Statement.** For superoperator modules  $M, N$ , a module morphism  $f$ : the composite of the functorial action of  $\text{Hom.id dayTensorUnit}$  and  $f$  after the inverse left unitor of  $M$  equals the composite of the inverse left unitor of  $N$  after  $f$ .

**Proof.** Both sides are compared pointwise (by extensionality). It follows from the transitivity for semantic equalities of circuits.

#### Lean 4 source `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```
theorem leftUnitorInv_natural {M N : Module} (f : Hom M N) :
  Hom.comp (DayTensor.map (Hom.id dayTensorUnit) f)
    (DayTensor.leftUnitorInv M) =
    Hom.comp (DayTensor.leftUnitorInv N) f := by
  have hcancell :
    Hom.comp (DayTensor.leftUnitor N)
      (Hom.comp (DayTensor.map (Hom.id dayTensorUnit) f)
        (DayTensor.leftUnitorInv M)) =
      f := by
    refine Eq.trans ?_ (Hom.comp_id f)
    refine Eq.trans ?_
      (congrArg (fun g => Hom.comp f g)
        (DayTensor.leftUnitorIso M).hom_inv)
  have hnata := leftUnitor_natural f
  refine Eq.trans (Eq.symm (by ext; rfl :
    Hom.comp (DayTensor.leftUnitor N)
      (Hom.comp (DayTensor.map (Hom.id dayTensorUnit) f)
        (DayTensor.leftUnitorInv M)) =
    Hom.comp
      (Hom.comp (DayTensor.leftUnitor N)
        (DayTensor.map (Hom.id dayTensorUnit) f))
```

```

      (DayTensor.leftUnitorInv M))) ?_
    refine Eq.trans (congrArg (fun g => Hom.comp g
      (DayTensor.leftUnitorInv M)) hnat) ?_
    ext; rfl
  refine Eq.trans ?_ (congrArg
    (fun g => Hom.comp (DayTensor.leftUnitorInv N) g) hcancel)
  have hinv := (DayTensor.leftUnitorIso N).inv_hom
  refine Eq.trans (Eq.symm (Hom.id_comp _)) ?_
  refine Eq.trans (congrArg (fun g => Hom.comp g
    (Hom.comp (DayTensor.map (Hom.id dayTensorUnit) f)
      (DayTensor.leftUnitorInv M))) hinv.symm) ?_
  ext; rfl

```

#### 4.4.718 Inverse tensor left unitor of one

**Statement.** The inverse tensor left unitor at 1 equals the identity on dimension the product of 1 and 1.

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with standard identities for equivalences, the reflexivity of the map induced by an index equivalence, the extensionality for bilinear maps and the fact that every index of a one-element `Fin` is zero.

**Lean 4 source** [QLambda/Domain/Presheaf/DayTensorCoherence.lean](#)

```

theorem tensorLeftUnitorInv_one :
  Superoperator.tensorLeftUnitorInv 1 =
    Superoperator.identity (1 * 1) := by
  change Superoperator.ofEquivalence
    (Superoperator.tensorLeftUnitorEquiv 1).symm =
    Superoperator.identity (1 * 1)
  have h :
    Superoperator.tensorLeftUnitorEquiv 1 =
      Equiv.refl (Fin (1 * 1)) := by
  apply Equiv.ext
  intro i
  apply Fin.ext
  exact (fin_val_eq_zero_of_card_one (rfl : 1 * 1 = 1)
    (Superoperator.tensorLeftUnitorEquiv 1 i)).trans
    (fin_val_eq_zero_of_card_one (rfl : 1 * 1 = 1)
      ((Equiv.refl (Fin (1 * 1))) i)).symm
  rw [h, Equiv.refl_symm, Superoperator.ofEquivalence_refl]

```

#### 4.4.719 Inverse tensor right unitor of one

**Statement.** The inverse tensor right unitor at 1 equals the identity on dimension the product of 1 and 1.

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with standard identities for equivalences, the reflexivity of the map induced by an index equivalence, the extensionality for bilinear maps and the fact that every index of a one-element `Fin` is zero.

**Lean 4 source** [QLambda/Domain/Presheaf/DayTensorCoherence.lean](#)

```

theorem tensorRightUnitorInv_one :
  Superoperator.tensorRightUnitorInv 1 =
    Superoperator.identity (1 * 1) := by

```

```

change Superoperator.ofEquivalence
  (Superoperator.tensorRightUnitorEquiv 1).symm =
  Superoperator.identity (1 * 1)
have h :
  Superoperator.tensorRightUnitorEquiv 1 =
  Equiv.refl (Fin (1 * 1)) := by
  apply Equiv.ext
  intro i
  apply Fin.ext
  exact (fin_val_eq_zero_of_card_one (rfl : 1 * 1 = 1)
    (Superoperator.tensorRightUnitorEquiv 1 i)).trans
    (fin_val_eq_zero_of_card_one (rfl : 1 * 1 = 1)
      ((Equiv.refl (Fin (1 * 1))) i)).symm
rw [h, Equiv.refl_symm, Superoperator.ofEquivalence_refl]

```

#### 4.4.720 The inverse left unitor of the unit equals the inverse right unitor of the unit

**Statement.** The inverse left unitor of the Day tensor unit equals the inverse right unitor of the Day tensor unit. Formally:  $\text{DayTensor.leftUnitorInv dayTensorUnit} = \text{DayTensor.rightUnitorInv dayTensorUnit}$ .

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the naturality of the inverse tensor left unitor, the naturality of the inverse tensor right unitor, the inverse tensor left unitor of one and the inverse tensor right unitor of one.

#### Lean 4 source `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```

theorem leftUnitorInv_unit_eq_rightUnitorInv_unit :
  DayTensor.leftUnitorInv dayTensorUnit =
  DayTensor.rightUnitorInv dayTensorUnit := by
  apply Hom.ext
  intro n x
  change
    (dayTensor dayTensorUnit dayTensorUnit).act
    ((DayCoend.intro dayTensorUnit dayTensorUnit).app
      (Superoperator.identity 1) x)
    (Superoperator.tensorLeftUnitorInv n) =
    (dayTensor dayTensorUnit dayTensorUnit).act
    ((DayCoend.intro dayTensorUnit dayTensorUnit).app
      x (Superoperator.identity 1))
    (Superoperator.tensorRightUnitorInv n)
  have hid1 : dayTensorUnit.act (Superoperator.identity 1) (Superoperator.identity 1)
  =
    (Superoperator.identity 1 : (dayTensorUnit.obj 1).Carrier) :=
    dayTensorUnit.act_id _
  have hx : dayTensorUnit.act (Superoperator.identity 1) x = x := by
    change Superoperator.comp (Superoperator.identity 1) x = x
    exact Superoperator.identity_comp x
  have hL :
    (DayCoend.intro dayTensorUnit dayTensorUnit).app
      (Superoperator.identity 1) x =
    (dayTensor dayTensorUnit dayTensorUnit).act
      ((DayCoend.intro dayTensorUnit dayTensorUnit).app
        (Superoperator.identity 1) (Superoperator.identity 1))
      (Superoperator.tensor (Superoperator.identity 1) x) := by

```

```

have h := (DayCoend.intro dayTensorUnit dayTensorUnit).naturality
  (Superoperator.identity 1) (Superoperator.identity 1)
  (Superoperator.identity 1) x
simpa [hidl, hx] using h
have hR :
  (DayCoend.intro dayTensorUnit dayTensorUnit).app
    x (Superoperator.identity 1) =
  (dayTensor dayTensorUnit dayTensorUnit).act
    ((DayCoend.intro dayTensorUnit dayTensorUnit).app
      (Superoperator.identity 1) (Superoperator.identity 1))
    (Superoperator.tensor x (Superoperator.identity 1)) := by
have h := (DayCoend.intro dayTensorUnit dayTensorUnit).naturality
  (Superoperator.identity 1) (Superoperator.identity 1)
  x (Superoperator.identity 1)
simpa [hidl, hx] using h
rw [hL, hR, (dayTensor dayTensorUnit dayTensorUnit).act_comp,
  (dayTensor dayTensorUnit dayTensorUnit).act_comp]
have hEq :
  Superoperator.comp
    (Superoperator.tensor (Superoperator.identity 1) x)
    (Superoperator.tensorLeftUnitorInv n) =
  Superoperator.comp
    (Superoperator.tensor x (Superoperator.identity 1))
    (Superoperator.tensorRightUnitorInv n) := by
rw [Superoperator.tensorLeftUnitorInv_naturality x,
  Superoperator.tensorRightUnitorInv_naturality x,
  tensorLeftUnitorInv_one, tensorRightUnitorInv_one]
exact congrArg
  ((dayTensor dayTensorUnit dayTensorUnit).act
    ((DayCoend.intro dayTensorUnit dayTensorUnit).app
      (Superoperator.identity 1) (Superoperator.identity 1)))
hEq

```

#### 4.4.721 The left unitor of the unit equals the right unitor of the unit

**Statement.** The left unitor of the Day tensor unit equals the right unitor of the Day tensor unit. Formally: `DayTensor.leftUnitor dayTensorUnit = DayTensor.rightUnitor dayTensorUnit`.

**Proof.** Both sides are compared pointwise (by extensionality). It follows from the transitivity for semantic equalities of circuits, congruence of function application, the fact that the identity is a left unit for composition for module morphisms and the fact that the identity is a right unit for composition for module morphisms.

#### Lean 4 source `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```

theorem leftUnitor_unit_eq_rightUnitor_unit :
  DayTensor.leftUnitor dayTensorUnit =
  DayTensor.rightUnitor dayTensorUnit := by
have hinv := leftUnitorInv_unit_eq_rightUnitorInv_unit
-- fun comp fun ^-1 = ? comp fun ^-1, then cancel fun ^-1 by composing with fun
  on the right
have hcomp :
  Hom.comp (DayTensor.leftUnitor dayTensorUnit)

```

```

      (DayTensor.leftUnitorInv dayTensorUnit) =
      Hom.comp (DayTensor.rightUnitor dayTensorUnit)
      (DayTensor.leftUnitorInv dayTensorUnit) := by
    have hl := (DayTensor.leftUnitorIso dayTensorUnit).hom_inv
    have hr := (DayTensor.rightUnitorIso dayTensorUnit).hom_inv
    -- fun comp fun ^-1 = id = ? comp ?^-1 = ? comp fun ^-1
    refine Eq.trans hl ?_
    refine Eq.trans hr.symm ?_
    exact congrArg (Hom.comp (DayTensor.rightUnitor dayTensorUnit)) hinv.symm
  -- compose both sides on the right with fun
  have h := congrArg (fun g => Hom.comp g (DayTensor.leftUnitor dayTensorUnit)) hcomp
  -- (fun comp fun ^-1) comp fun = (? comp fun ^-1) comp fun
  have hL : Hom.comp
    (Hom.comp (DayTensor.leftUnitor dayTensorUnit)
      (DayTensor.leftUnitorInv dayTensorUnit))
    (DayTensor.leftUnitor dayTensorUnit) =
    DayTensor.leftUnitor dayTensorUnit := by
    have hl := (DayTensor.leftUnitorIso dayTensorUnit).hom_inv
    refine Eq.trans (congrArg (fun g => Hom.comp g
      (DayTensor.leftUnitor dayTensorUnit)) hl) ?_
    exact Hom.id_comp _
  have hR : Hom.comp
    (Hom.comp (DayTensor.rightUnitor dayTensorUnit)
      (DayTensor.leftUnitorInv dayTensorUnit))
    (DayTensor.leftUnitor dayTensorUnit) =
    DayTensor.rightUnitor dayTensorUnit := by
    -- (? comp fun ^-1) comp fun = ? comp (fun ^-1 comp fun) = ? comp id =
    ?
    refine Eq.trans (by ext; rfl) ?_
    refine Eq.trans (congrArg (Hom.comp (DayTensor.rightUnitor dayTensorUnit)
      (DayTensor.leftUnitorIso dayTensorUnit).inv_hom) ?_
    exact Hom.comp_id _
  exact Eq.trans hL.symm (Eq.trans h hR)

```

#### 4.4.722 Coherence: $(\text{id} \otimes \lambda) \circ \alpha \circ (\lambda^{-1} \otimes \text{id}) = \text{id}$ on $\mathbf{I} \otimes \mathbf{I}$

**Statement.** Coherence:  $(\text{id} \otimes \lambda) \circ \alpha \circ (\lambda^{-1} \otimes \text{id}) = \text{id}$  on  $\mathbf{I} \otimes \mathbf{I}$ .

**Proof.** The key step rewrites with the fact that the inverse left unitor of the unit equals the inverse right unitor of the unit, the fact that the identity is a left unit for composition for module morphisms, the fact that the functorial action for Day tensor products preserves identities and the transitivity for semantic equalities of circuits.

#### Lean 4 source `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```

theorem leftUnitor_associator_coherence :
  Hom.comp (DayTensor.map (Hom.id dayTensorUnit) (DayTensor.leftUnitor dayTensorUnit
  ))
    (Hom.comp (DayTensor.associator dayTensorUnit dayTensorUnit dayTensorUnit)
      (DayTensor.map (DayTensor.leftUnitorInv dayTensorUnit) (Hom.id dayTensorUnit)))
  ) =
  Hom.id (dayTensor dayTensorUnit dayTensorUnit) := by
  -- triangle: map(id,fun ) comp a = map(?,id)
  have htri := DayTensor.triangle dayTensorUnit dayTensorUnit
  refine Eq.trans (congrArg (fun g => Hom.comp g

```



```

      (DayTensor.map (DayTensor.leftUnitorInv dayTensorUnit)
        (Hom.id dayTensorUnit))) htri) ?_
-- map(?,id) comp map(fun ^-1,id) = map(? comp fun ^-1, id)
have hmap := DayTensor.map_comp (DayTensor.rightUnitor dayTensorUnit)
  (DayTensor.leftUnitorInv dayTensorUnit)
  (Hom.id dayTensorUnit) (Hom.id dayTensorUnit)
refine Eq.trans hmap.symm ?_
-- ? comp fun ^-1 = ? comp ?^-1 = id (using fun ^-1=?^-1)
have hcancel :
  Hom.comp (DayTensor.rightUnitor dayTensorUnit)
    (DayTensor.leftUnitorInv dayTensorUnit) =
    Hom.id dayTensorUnit := by
  rw [leftUnitorInv_unit_eq_rightUnitorInv_unit]
  exact (DayTensor.rightUnitorIso dayTensorUnit).hom_inv
refine Eq.trans (congrArg (fun g => DayTensor.map g (Hom.comp (Hom.id dayTensorUnit)
  (Hom.id dayTensorUnit))))
  hcancel) ?_
simp only [Hom.id_comp, DayTensor.map_id]

```

#### 4.4.723 Naturality of the right unitor

**Statement.** For superoperator modules  $M, N$ , a module morphism  $f$ : the composite of the right unitor of  $N$  after the functorial action of  $f$  and  $\text{Hom.id dayTensorUnit}$  equals the composite of  $f$  after the right unitor of  $M$ .

**Proof.** The key step rewrites with the functorial action on an introduced element, the components of the composition, the components of the identity and the fact that extensionality for maps out of a Day tensor: it is enough to check coend generators.

#### Lean 4 source `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```

theorem rightUnitor_natural {M N : Module} (f : Hom M N) :
  Hom.comp (DayTensor.rightUnitor N)
    (DayTensor.map f (Hom.id dayTensorUnit)) =
  Hom.comp f (DayTensor.rightUnitor M) := by
  apply DayTensor.hom_ext
  intro m n x y
  simp only [DayTensor.map_intro, Hom.comp_app, Hom.id_app]
  have hL := DayTensor.rightUnitor_intro (M := N) (f.app m x) y
  have hR := DayTensor.rightUnitor_intro (M := M) x y
  change
    (DayTensor.rightUnitor N).app (m * n)
      ((DayCoend.intro N dayTensorUnit).app (f.app m x) y) =
    f.app (m * n)
      ((DayTensor.rightUnitor M).app (m * n)
        ((DayCoend.intro M dayTensorUnit).app x y))
  rw [hL, hR, f.naturality]

```

#### 4.4.724 Naturality of the inverse right unitor

**Statement.** For superoperator modules  $M, N$ , a module morphism  $f$ : the composite of the functorial action of  $f$  and  $\text{Hom.id dayTensorUnit}$  after the inverse right unitor of  $M$  equals the composite of the inverse right unitor of  $N$  after  $f$ .

**Proof.** Both sides are compared pointwise (by extensionality). It follows from the transitivity for semantic equalities of circuits.

#### Lean 4 source `QLambda/Domain/Presheaf/DayTensorCoherence.lean`

```
theorem rightUnitorInv_natural {M N : Module} (f : Hom M N) :
  Hom.comp (DayTensor.map f (Hom.id dayTensorUnit))
    (DayTensor.rightUnitorInv M) =
  Hom.comp (DayTensor.rightUnitorInv N) f := by
have hcancell :
  Hom.comp (DayTensor.rightUnitor N)
    (Hom.comp (DayTensor.map f (Hom.id dayTensorUnit))
      (DayTensor.rightUnitorInv M)) =
  f := by
  refine Eq.trans ?_ (Hom.comp_id f)
  refine Eq.trans ?_
    (congrArg (fun g => Hom.comp f g)
      (DayTensor.rightUnitorIso M).hom_inv)
  have hnatt := rightUnitor_natural f
  refine Eq.trans (Eq.symm (by ext; rfl :
    Hom.comp (DayTensor.rightUnitor N)
      (Hom.comp (DayTensor.map f (Hom.id dayTensorUnit))
        (DayTensor.rightUnitorInv M)) =
    Hom.comp
      (Hom.comp (DayTensor.rightUnitor N)
        (DayTensor.map f (Hom.id dayTensorUnit)))
        (DayTensor.rightUnitorInv M))) ?_
  refine Eq.trans (congrArg (fun g => Hom.comp g
    (DayTensor.rightUnitorInv M)) hnatt) ?_
  ext; rfl
  refine Eq.trans ?_ (congrArg
    (fun g => Hom.comp (DayTensor.rightUnitorInv N) g) hcancell)
  have hinv := (DayTensor.rightUnitorIso N).inv_hom
  refine Eq.trans (Eq.symm (Hom.id_comp _)) ?_
  refine Eq.trans (congrArg (fun g => Hom.comp g
    (Hom.comp (DayTensor.map f (Hom.id dayTensorUnit))
      (DayTensor.rightUnitorInv M))) hinv.symm) ?_
  ext; rfl
```

#### 4.4.725 Universal-property package for one genuine Day tensor

**Definition.** Universal-property package for one genuine Day tensor. Constructing this for all modules is the categorical gate not supplied by the representable fragment below.

**Construction.** An element consists of object, intro, universal and universal\_apply.

#### Lean 4 source `QLambda/Domain/Presheaf/DayTensorPresentation.lean`

```
structure DayTensorPresentation (M : Module.{u}) (N : Module.{v}) where
  object : Module.{w}
  intro : Bilinear M N object
  universal : forall L : Module.{u}, Hom object L ? Bilinear M N L
  universal_apply :
    forall (L : Module.{u}) (f : Hom object L),
      universal L f = Bilinear.postcomp f intro
```

#### 4.4.726 Tensoring representables is represented by multiplication of their finite dimensions

**Definition.** Tensoring representables is represented by multiplication of their finite dimensions.

**Construction.** Defined to be the representable module of the product of A and B.

**Lean 4 source** [QLambda/Domain/Presheaf/DayTensorRepresentable.lean](#)

```
noncomputable abbrev dayTensorRepresentable (A B : Nat) : Module :=
  representable (A * B)
```

#### 4.4.727 The universal bilinear map into the representable Day tensor

**Definition.** The universal bilinear map into the representable Day tensor.

**Construction.** Constructed by supplying each component: application, functorial action zero left, functorial action zero right, functorial action sum left, functorial action sum right and naturality. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/Presheaf/DayTensorRepresentable.lean](#)

```
noncomputable def dayTensorIntro (A B : Nat) :
  Bilinear (representable A) (representable B)
  (dayTensorRepresentable A B) where
  app := fun x y => Superoperator.tensor x y
  map_zero_left := Superoperator.tensor_zero_left
  map_zero_right := Superoperator.tensor_zero_right
  map_sum_left := by
    intro ? _ m n x s y h
    exact SigmaMon.ChoiSum.tensor_hasSum_left h y
  map_sum_right := by
    intro ? _ m n x y s h
    exact SigmaMon.ChoiSum.tensor_hasSum_right x h
  naturality := by
    intro m' m n' n x y f g
    exact Superoperator.tensor_comp x f y g
```

#### 4.4.728 A map out of the representable Day tensor gives a bilinear map

**Definition.** A map out of the representable Day tensor gives a bilinear map.

**Construction.** Constructed by supplying each component: application, functorial action zero left, functorial action zero right, functorial action sum left, functorial action sum right and naturality. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/Presheaf/DayTensorRepresentable.lean](#)

```
noncomputable def dayTensorToBilinear {A B : Nat} {L : Module.{u}}
  (? : Hom (dayTensorRepresentable A B) L) :
  Bilinear (representable A) (representable B) L where
  app := fun x y => ?.app _ (Superoperator.tensor x y)
  map_zero_left := by
    intro m n y
    change Superoperator n B at y
    change ?.app (m * n)
```

```

      (Superoperator.tensor (0 : Superoperator m A) y) = 0
    rw [Superoperator.tensor_zero_left]
    exact ?.map_zero (m * n)
  map_zero_right := by
    intro m n x
    change Superoperator m A at x
    change ?.app (m * n)
    (Superoperator.tensor x (0 : Superoperator n B)) = 0
    rw [Superoperator.tensor_zero_right]
    exact ?.map_zero (m * n)
  map_sum_left := by
    intro ? _ m n x s y h
    exact ?.map_sum (SigmaMon.ChoiSum.tensor_hasSum_left h y)
  map_sum_right := by
    intro ? _ m n x y s h
    exact ?.map_sum (SigmaMon.ChoiSum.tensor_hasSum_right x h)
  naturality := by
    intro m' m n' n x y f g
    change Superoperator m A at x
    change Superoperator n B at y
    change
      ?.app (m' * n')
      (Superoperator.tensor (Superoperator.comp x f)
        (Superoperator.comp y g)) =
      L.act (?.app (m * n) (Superoperator.tensor x y))
      (Superoperator.tensor f g)
    rw [Superoperator.tensor_comp]
    exact ?.naturality (Superoperator.tensor x y)
      (Superoperator.tensor f g)

```

#### 4.4.729 A bilinear map out of two representables is determined by its value on the two identities

**Definition.** A bilinear map out of two representables is determined by its value on the two identities.

**Construction.** Defined to be the from element of  $L$  and the application of `Superoperator.identity A` and `Superoperator.identity B`.

**Lean 4 source** `QLambda/Domain/Presheaf/DayTensorRepresentable.lean`

```

noncomputable def bilinearToDayTensor {A B : Nat} {L : Module.{u}}
  (b : Bilinear (representable A) (representable B) L) :
  Hom (dayTensorRepresentable A B) L :=
  fromElement L (b.app (Superoperator.identity A)
    (Superoperator.identity B))

```

#### 4.4.730 Bilinear to Day tensor product of the passage to bilinear map

**Statement.** For natural numbers  $A, B$ , a superoperator module  $L$ , a module morphism  $\eta$ : the bilinear to Day tensor product of the Day tensor product to bilinear map of  $\eta$  equals  $\eta$ .

**Proof.** The key step rewrites with the tensor product of an identity and the from element of the passage to element.

**Lean 4 source** `QLambda/Domain/Presheaf/DayTensorRepresentable.lean`

```

theorem bilinearToDayTensor_toBilinear {A B : Nat} {L : Module.{u}}
  (? : Hom (dayTensorRepresentable A B) L) :
  bilinearToDayTensor (dayTensorToBilinear ?) = ? := by
change
  fromElement L
    (? .app (A * B)
      (Superoperator.tensor (Superoperator.identity A)
        (Superoperator.identity B))) =
    ?
  rw [Superoperator.tensor_identity]
  exact fromElement_toElement L ?

```

#### 4.4.731 Day tensor product to bilinear map of a bilinear to Day tensor product

**Statement.** For natural numbers  $A, B$ , a superoperator module  $L$ : the Day tensor product to bilinear map of the bilinear to Day tensor product of  $b$  equals  $b$ .

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the identity of a composite for superoperators.

**Lean 4 source** [QLambda/Domain/Presheaf/DayTensorRepresentable.lean](#)

```

theorem dayTensorToBilinear_bilinearToDayTensor
  {A B : Nat} {L : Module.{u}}
  (b : Bilinear (representable A) (representable B) L) :
  dayTensorToBilinear (bilinearToDayTensor b) = b := by
ext m n x y
change Superoperator m A at x
change Superoperator n B at y
change
  L.act
    (b.app (Superoperator.identity A) (Superoperator.identity B))
    (Superoperator.tensor x y) =
    b.app x y
symm
have h :=
  b.naturality (Superoperator.identity A)
    (Superoperator.identity B) x y
change
  b.app
    (Superoperator.comp (Superoperator.identity A) x)
    (Superoperator.comp (Superoperator.identity B) y) =
    L.act
      (b.app (Superoperator.identity A) (Superoperator.identity B))
      (Superoperator.tensor x y) at h
  rw [Superoperator.identity_comp, Superoperator.identity_comp] at h
  exact h

```

#### 4.4.732 The specialized Day universal property for representables

**Definition.** The specialized Day universal property for representables.

**Construction.** Constructed by supplying each component: passage to fun, inverse fun, left inverse and right inverse. The accompanying laws are verified from the definitions.

#### Lean 4 source `QLambda/Domain/Presheaf/DayTensorRepresentable.lean`

```
noncomputable def dayTensorRepresentableEquiv
  (A B : Nat) (L : Module.{u}) :
  Hom (dayTensorRepresentable A B) L ?
  Bilinear (representable A) (representable B) L where
toFun := dayTensorToBilinear
invFun := bilinearToDayTensor
left_inv := bilinearToDayTensor_toBilinear
right_inv := dayTensorToBilinear_bilinearToDayTensor
```

#### 4.4.733 The representable construction packaged as an actual Day tensor

**Definition.** The representable construction packaged as an actual Day tensor.

**Construction.** Constructed by supplying each component: object, introduction, universal and universal application. The accompanying laws are verified from the definitions.

#### Lean 4 source `QLambda/Domain/Presheaf/DayTensorRepresentable.lean`

```
noncomputable def dayTensorRepresentablePresentation (A B : Nat) :
  DayTensorPresentation (representable A) (representable B) where
object := dayTensorRepresentable A B
intro := dayTensorIntro A B
universal := fun L => dayTensorRepresentableEquiv A B L
universal_apply := by
  intro L f
  ext m n x y
  rfl
```

#### 4.4.734 Promotion into the restricted concrete comonoid-morphism class

**Definition.** Promotion into the restricted concrete comonoid-morphism class.

**Construction.** Constructed by supplying each component of the structure explicitly.

#### Lean 4 source `QLambda/Domain/Presheaf/Exponential.lean`

```
def symmetricEquivalencePromote {A B : Nat} (e : Fin A ? Fin B) :
  SymmetricEquivalenceComonoidHom A B :=
  <e>
```

#### 4.4.735 Recover the cogenerating basis equivalence

**Definition.** Recover the cogenerating basis equivalence.

**Construction.** Defined to be the equivalence of  $\mathbb{f}$ .

#### Lean 4 source `QLambda/Domain/Presheaf/Exponential.lean`

```
def symmetricEquivalenceGenerator {A B : Nat}
  (f : SymmetricEquivalenceComonoidHom A B) :
  Fin A ? Fin B :=
  f.equivalence
```

#### 4.4.736 Symmetric equivalence generator of the promotion

**Statement.** For natural numbers  $A, B$ , an index  $e$ : the symmetric equivalence generator of the symmetric equivalence promotion of  $e$  equals  $e$ .

**Proof.** By definition. Unfolding the symmetric equivalence generator turns the left-hand side, the symmetric equivalence generator of the symmetric equivalence promotion of  $e$ , into the right-hand side,  $e$ ; the two sides are the same term.

**Lean 4 source** `QLambda/Domain/Presheaf/Exponential.lean`

```
theorem symmetricEquivalenceGenerator_promote {A B : Nat}
  (e : Fin A → Fin B) :
  symmetricEquivalenceGenerator (symmetricEquivalencePromote e) = e :=
  rfl
```

#### 4.4.737 Symmetric equivalence promotion of the generator

**Statement.** For natural numbers  $A, B$ : the symmetric equivalence promotion of the symmetric equivalence generator of  $f$  equals  $f$ .

**Proof.** By case analysis on  $f$ .

**Lean 4 source** `QLambda/Domain/Presheaf/Exponential.lean`

```
theorem symmetricEquivalencePromote_generator {A B : Nat}
  (f : SymmetricEquivalenceComonoidHom A B) :
  symmetricEquivalencePromote (symmetricEquivalenceGenerator f) = f := by
  cases f
  rfl
```

#### 4.4.738 Equivalence between finite basis maps and the structural promotions they induce

**Definition.** Equivalence between finite basis maps and the structural promotions they induce. This is not the unrestricted cofree correspondence.

**Construction.** Constructed by supplying each component: passage to fun, inverse fun, left inverse and right inverse. The accompanying laws are verified from the definitions.

**Lean 4 source** `QLambda/Domain/Presheaf/Exponential.lean`

```
def symmetricEquivalencePromotionEquiv (A B : Nat) :
  (Fin A → Fin B) → SymmetricEquivalenceComonoidHom A B where
  toFun := symmetricEquivalencePromote
  invFun := symmetricEquivalenceGenerator
  left_inv := symmetricEquivalenceGenerator_promote
  right_inv := symmetricEquivalencePromote_generator
```

#### 4.4.739 Uniqueness of restricted promotion

**Statement.** Uniqueness of restricted promotion. Formally:  $f = \text{symmetricEquivalencePromote } e$ .

**Proof.** Both sides are compared pointwise (by extensionality). It follows from the extensionality for symmetric-equivalence comonoid morphisms and the hypothesis that `symmetricEquivalenceGenerator f = e`.

#### Lean 4 source `QLambda/Domain/Presheaf/Exponential.lean`

```
theorem symmetricEquivalencePromotion_unique {A B : Nat}
  (e : Fin A → Fin B) (f : SymmetricEquivalenceComonoidHom A B)
  (hf : symmetricEquivalenceGenerator f = e) :
  f = symmetricEquivalencePromote e := by
  apply SymmetricEquivalenceComonoidHom.ext
  exact hf
```

#### 4.4.740 The fully typed coefficientwise composite ( $\text{weakening} \otimes \text{id}$ ) $\circ$ contraction

**Definition.** The fully typed coefficientwise composite ( $\text{weakening} \otimes \text{id}$ )  $\circ$  contraction.

**Construction.** Constructed by supplying each component: application, invariant, functorial action zero, functorial action sum and naturality. The accompanying laws are verified from the definitions.

#### Lean 4 source `QLambda/Domain/Presheaf/Exponential.lean`

```
noncomputable def symmetricLeftCounitComposite (A : Nat) :
  Hom (symmetricFormalPowerSeries A)
    (symmetricFormalPowerSeries A) where
app := fun _ x q =>
  { val := Superoperator.comp
    (Superoperator.ofEquivalence (homogeneousLeftUnitorEquiv A q))
    (Superoperator.comp
      (Superoperator.ofEquivalence (tensorSplitEquiv A 0 q))
      (x (0 + q)).val)
    invariant := by
      intro sigma
      rw [SymmetricElement.left_counit x]
      exact (x q).invariant sigma }
map_zero := by
  intro n
  funext q
  apply SymmetricElement.ext
  exact SymmetricElement.left_counit
    (fun k => (0 : SymmetricElement A k n))
map_sum := by
  intro ? _ n f x h q
  exact SigmaMon.ChoiSum.comp_left
    (Superoperator.ofEquivalence (homogeneousLeftUnitorEquiv A q))
    (SigmaMon.ChoiSum.comp_left
      (Superoperator.ofEquivalence (tensorSplitEquiv A 0 q))
      (h (0 + q)))
naturality := by
  intro m n x f
  funext q
  apply SymmetricElement.ext
  change
    Superoperator.comp
      (Superoperator.ofEquivalence (homogeneousLeftUnitorEquiv A q))
```



```

(Superoperator.comp
  (Superoperator.ofEquivalence (tensorSplitEquiv A 0 q))
  (Superoperator.comp (x (0 + q)).val f)) =
Superoperator.comp
  (Superoperator.comp
    (Superoperator.ofEquivalence (homogeneousLeftUnitorEquiv A q))
    (Superoperator.comp
      (Superoperator.ofEquivalence (tensorSplitEquiv A 0 q))
      (x (0 + q)).val)) f
simp only [Superoperator.comp_assoc]

```

#### 4.4.741 The fully typed coefficientwise composite ( $\text{id} \otimes \text{weakening}$ ) $\circ$ contraction

**Definition.** The fully typed coefficientwise composite ( $\text{id} \otimes \text{weakening}$ )  $\circ$  contraction.

**Construction.** Constructed by supplying each component: application, invariant, functorial action zero, functorial action sum and naturality. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/Presheaf/Exponential.lean](#)

```

noncomputable def symmetricRightCounitComposite (A : Nat) :
  Hom (symmetricFormalPowerSeries A)
    (symmetricFormalPowerSeries A) where
app := fun _ x p =>
  { val := Superoperator.comp
    (Superoperator.ofEquivalence (homogeneousRightUnitorEquiv A p))
    (Superoperator.comp
      (Superoperator.ofEquivalence (tensorSplitEquiv A p 0))
      (x (p + 0)).val)
  invariant := by
    intro sigma
    rw [SymmetricElement.right_counit x]
    exact (x p).invariant sigma }
map_zero := by
  intro n
  funext p
  apply SymmetricElement.ext
  exact SymmetricElement.right_counit
    (fun k => (0 : SymmetricElement A k n))
map_sum := by
  intro ? _ n f x h p
  exact SigmaMon.ChoiSum.comp_left
    (Superoperator.ofEquivalence (homogeneousRightUnitorEquiv A p))
    (SigmaMon.ChoiSum.comp_left
      (Superoperator.ofEquivalence (tensorSplitEquiv A p 0))
      (h (p + 0)))
naturality := by
  intro m n x f
  funext p
  apply SymmetricElement.ext
  change
    Superoperator.comp
      (Superoperator.ofEquivalence (homogeneousRightUnitorEquiv A p))
      (Superoperator.comp
        (Superoperator.ofEquivalence (tensorSplitEquiv A p 0))

```

```

      (Superoperator.comp (x (p + 0)).val f)) =
    Superoperator.comp
      (Superoperator.comp
        (Superoperator.ofEquivalence (homogeneousRightUnitorEquiv A p))
        (Superoperator.comp
          (Superoperator.ofEquivalence (tensorSplitEquiv A p 0))
          (x (p + 0)).val)) f
    simp only [Superoperator.comp_assoc]

```

#### 4.4.742 Symmetric left counit of the contraction

**Statement.** For a natural number  $A$ : the symmetric left counit composite of  $A$  equals the identity of the symmetric formal power series of  $A$ .

**Proof.** Both sides are compared pointwise (by extensionality). It follows from the extensionality for symmetric tensors and the fact that degree-zero contraction followed by the left unitor is the original coefficient.

**Lean 4 source** [QLambda/Domain/Presheaf/Exponential.lean](#)

```

theorem symmetricLeftCounit_contraction (A : Nat) :
  symmetricLeftCounitComposite A =
    Hom.id (symmetricFormalPowerSeries A) := by
  ext n x
  funext q
  apply SymmetricElement.ext
  exact SymmetricElement.left_counit x

```

#### 4.4.743 Symmetric right counit of the contraction

**Statement.** For a natural number  $A$ : the symmetric right counit composite of  $A$  equals the identity of the symmetric formal power series of  $A$ .

**Proof.** Both sides are compared pointwise (by extensionality). It follows from the extensionality for symmetric tensors and the fact that degree-zero contraction followed by the right unitor is the original coefficient.

**Lean 4 source** [QLambda/Domain/Presheaf/Exponential.lean](#)

```

theorem symmetricRightCounit_contraction (A : Nat) :
  symmetricRightCounitComposite A =
    Hom.id (symmetricFormalPowerSeries A) := by
  ext n x
  funext p
  apply SymmetricElement.ext
  exact SymmetricElement.right_counit x

```

#### 4.4.744 The left-associated coefficientwise Day tensor cube

**Definition.** The left-associated coefficientwise Day tensor cube.

**Construction.** Defined by an explicit formula built from the countable product, the representable module and the dimension of a tensor power.

#### Lean 4 source `QLambda/Domain/Presheaf/Exponential.lean`

```
noncomputable def symmetricFormalTensorCube (A : Nat) : Module :=
  countableProduct (fun p =>
    countableProduct (fun q =>
      countableProduct (fun r =>
        representable
          ((tensorPowerDimension A p * tensorPowerDimension A q) *
            tensorPowerDimension A r))))
```

#### 4.4.745 The coefficientwise composite ( $\text{contraction} \otimes \text{id}$ ) $\circ$ $\text{contraction}$

**Definition.** The coefficientwise composite ( $\text{contraction} \otimes \text{id}$ )  $\circ$   $\text{contraction}$ .

**Construction.** Constructed by supplying each component: application, functorial action zero, functorial action sum and naturality. The accompanying laws are verified from the definitions.

#### Lean 4 source `QLambda/Domain/Presheaf/Exponential.lean`

```
noncomputable def symmetricLeftIteratedContraction (A : Nat) :
  Hom (symmetricFormalPowerSeries A)
      (symmetricFormalTensorCube A) where
  app := fun _ x p q r =>
    Superoperator.comp
      (Superoperator.ofEquivalence
        (contractionLeftRefinementEquiv A p q r))
      (Superoperator.comp
        (Superoperator.ofEquivalence
          (tensorSplitEquiv A (p + q) r))
          (x ((p + q) + r)).val)
  map_zero := by
    intro n
    funext p q r
    change
      Superoperator.comp
        (Superoperator.ofEquivalence
          (contractionLeftRefinementEquiv A p q r))
        (Superoperator.comp
          (Superoperator.ofEquivalence
            (tensorSplitEquiv A (p + q) r))
            (0 : Superoperator n
              (tensorPowerDimension A ((p + q) + r)))) =
        (0 : Superoperator n
          ((tensorPowerDimension A p * tensorPowerDimension A q) *
            tensorPowerDimension A r))
    rw [Superoperator.comp_zero_right, Superoperator.comp_zero_right]
  map_sum := by
    intro ? _ n f x h p q r
    exact SigmaMon.ChoiSum.comp_left
      (Superoperator.ofEquivalence
        (contractionLeftRefinementEquiv A p q r))
      (SigmaMon.ChoiSum.comp_left
```

```

      (Superoperator.ofEquivalence
        (tensorSplitEquiv A (p + q) r))
      (h ((p + q) + r)))
natrality := by
  intro m n x f
  funext p q r
  change
    Superoperator.comp
      (Superoperator.ofEquivalence
        (contractionLeftRefinementEquiv A p q r))
      (Superoperator.comp
        (Superoperator.ofEquivalence
          (tensorSplitEquiv A (p + q) r))
          (Superoperator.comp (x ((p + q) + r)).val f)) =
      Superoperator.comp
        (Superoperator.comp
          (Superoperator.ofEquivalence
            (contractionLeftRefinementEquiv A p q r))
          (Superoperator.comp
            (Superoperator.ofEquivalence
              (tensorSplitEquiv A (p + q) r))
              (x ((p + q) + r)).val)) f
    simp only [Superoperator.comp_assoc]

```

#### 4.4.746 The coefficientwise composite $(\text{id} \otimes \text{contraction}) \circ \text{contraction}$ , transported to the left-associated tensor cube

**Definition.** The coefficientwise composite  $(\text{id} \otimes \text{contraction}) \circ \text{contraction}$ , transported to the left-associated tensor cube.

**Construction.** Constructed by supplying each component: application, functorial action zero, functorial action sum and naturality. The accompanying laws are verified from the definitions.

#### Lean 4 source [QLambda/Domain/Presheaf/Exponential.lean](#)

```

noncomputable def symmetricRightIteratedContraction (A : Nat) :
  Hom (symmetricFormalPowerSeries A)
    (symmetricFormalTensorCube A) where
app := fun _ x p q r =>
  Superoperator.comp
    (Superoperator.ofEquivalence
      (contractionRightRefinementEquiv A p q r))
    (Superoperator.comp
      (Superoperator.ofEquivalence
        (tensorSplitEquiv A p (q + r)))
      (x (p + (q + r))).val)
map_zero := by
  intro n
  funext p q r
  change
    Superoperator.comp
      (Superoperator.ofEquivalence
        (contractionRightRefinementEquiv A p q r))
      (Superoperator.comp
        (Superoperator.ofEquivalence

```

```

      (tensorSplitEquiv A p (q + r)))
    (0 : Superoperator n
      (tensorPowerDimension A (p + (q + r))))) =
    (0 : Superoperator n
      ((tensorPowerDimension A p * tensorPowerDimension A q) *
        tensorPowerDimension A r))
  rw [Superoperator.comp_zero_right, Superoperator.comp_zero_right]
map_sum := by
  intro ? _ n f x h p q r
  exact SigmaMon.ChoiSum.comp_left
    (Superoperator.ofEquivalence
      (contractionRightRefinementEquiv A p q r))
    (SigmaMon.ChoiSum.comp_left
      (Superoperator.ofEquivalence
        (tensorSplitEquiv A p (q + r)))
        (h (p + (q + r)))))
natrality := by
  intro m n x f
  funext p q r
  change
    Superoperator.comp
      (Superoperator.ofEquivalence
        (contractionRightRefinementEquiv A p q r))
      (Superoperator.comp
        (Superoperator.ofEquivalence
          (tensorSplitEquiv A p (q + r)))
          (Superoperator.comp (x (p + (q + r))).val f)) =
    Superoperator.comp
      (Superoperator.comp
        (Superoperator.ofEquivalence
          (contractionRightRefinementEquiv A p q r))
        (Superoperator.comp
          (Superoperator.ofEquivalence
            (tensorSplitEquiv A p (q + r)))
            (x (p + (q + r))).val)) f
  simp only [Superoperator.comp_assoc]

```

#### 4.4.747 Coassociativity of the symmetric contraction

**Statement.** For a natural number  $A$ : the symmetric left iterated contraction of  $A$  equals the symmetric right iterated contraction of  $A$ .

**Proof.** Both sides are compared pointwise (by extensionality). It follows from the fact that the two coefficientwise iterates of contraction agree after the canonical associativity transport.

**Lean 4 source** [QLambda/Domain/Presheaf/Exponential.lean](#)

```

theorem symmetricContraction_coassociative (A : Nat) :
  symmetricLeftIteratedContraction A =
    symmetricRightIteratedContraction A := by
  ext n x
  funext p q r
  exact SymmetricElement.contraction_coassociative x

/-! ## Formal power series on tensor powers -/

```

#### 4.4.748 Formal power series whose degree-k coefficient lies in the representable k-fold tensor power

**Definition.** Formal power series whose degree-k coefficient lies in the representable k-fold tensor power.

**Construction.** Defined to be the countable product of  $\text{fun } k \Rightarrow (\text{exponentialDegree } A \ k) . \text{toModule}$ .

**Lean 4 source** `QLambda/Domain/Presheaf/Exponential.lean`

```
noncomputable def formalPowerSeries (A : Nat) : Module :=
  countableProduct (fun k => (exponentialDegree A k).toModule)
```

#### 4.4.749 The formal-series product remains in the closed-generated fragment

**Definition.** The formal-series product remains in the closed-generated fragment: its degree projections and injections form a countable resolution of identity.

**Construction.** Constructed by supplying each component: module, basis, countable index, coefficient, ket, bra and resolves. The accompanying laws are verified from the definitions.

**Lean 4 source** `QLambda/Domain/Presheaf/Exponential.lean`

```
noncomputable def closedFormalPowerSeries (A : Nat) : ClosedGenerated where
  module := formalPowerSeries A
  basis :=
    { Index := Nat
      countableIndex := inferInstance
      coeff := exponentialDegree A
      ket := fun k =>
        countableProductInjection
          (fun j => (exponentialDegree A j).toModule) k
      bra := fun k =>
        countableProductProjection
          (fun j => (exponentialDegree A j).toModule) k
      resolves := by
        intro n x k
        change ((exponentialDegree A k).toModule.obj n).HasSum
          (fun i => if h : k = i then h |> x i else 0) (x k)
        have hs := Fiber.hasSum_singleCoordinate
          ((exponentialDegree A k).toModule.obj n) k (x k)
        convert hs using 1
        funext i
        by_cases h : k = i
        * subst i
          simp
        * simp [h, Ne.symm h] }
```

#### 4.4.750 Closed term formal power series of the module

**Statement.** For a natural number A:  $(\text{closedFormalPowerSeries } A) . \text{module}$  equals the formal power series of A.

**Proof.** By definition. Unfolding the module turns the left-hand side,  $(\text{closedFormalPowerSeries } A) . \text{module}$ , into the right-hand side, the formal power series of A; the two sides are the same term.

#### Lean 4 source `QLambda/Domain/Presheaf/Exponential.lean`

```
theorem closedFormalPowerSeries_module (A : Nat) :  
  (closedFormalPowerSeries A).module = formalPowerSeries A :=  
  rfl
```

#### 4.4.751 Functorial action on formal power series, coefficient by coefficient

**Definition.** Functorial action on formal power series, coefficient by coefficient.

**Construction.** Defined to be the countable product functorial action of  $\text{fun } k \Rightarrow \text{exponentialDegreeMap } f \ k$ .

#### Lean 4 source `QLambda/Domain/Presheaf/Exponential.lean`

```
noncomputable def formalPowerSeriesMap {A B : Nat}  
  (f : Superoperator A B) :  
  Hom (formalPowerSeries A) (formalPowerSeries B) :=  
  countableProductMap (fun k => exponentialDegreeMap f k)
```

#### 4.4.752 The formal power series functorial action preserves identities

**Statement.** For a natural number  $A$ : the formal power series functorial action of the identity on dimension  $A$  equals the identity of the formal power series of  $A$ .

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the definition of the formal power series functorial action, the fact that the exponential degree functorial action preserves identities and the fact that the countable product functorial action preserves identities.

#### Lean 4 source `QLambda/Domain/Presheaf/Exponential.lean`

```
theorem formalPowerSeriesMap_identity (A : Nat) :  
  formalPowerSeriesMap (Superoperator.identity A) =  
  Hom.id (formalPowerSeries A) := by  
  have h :  
    (fun k => exponentialDegreeMap (Superoperator.identity A) k) =  
    (fun k => Hom.id (exponentialDegree A k).toModule) := by  
    funext k  
    exact exponentialDegreeMap_identity A k  
  rw [formalPowerSeriesMap, h]  
  exact countableProductMap_id  
    (fun k => (exponentialDegree A k).toModule)
```

#### 4.4.753 The formal power series functorial action preserves composition

**Statement.** For natural numbers  $A, B, C$ , superoperators  $g, f$ : the formal power series functorial action of the composite of  $g$  after  $f$  equals the composite of the formal power series functorial action of  $g$  after the formal power series functorial action of  $f$ .

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the definition of the formal power series functorial action, the fact that the exponential degree functorial action preserves composition and the fact that the countable product functorial action preserves composition.

#### Lean 4 source `QLambda/Domain/Presheaf/Exponential.lean`

```
theorem formalPowerSeriesMap_comp {A B C : Nat}
  (g : Superoperator B C) (f : Superoperator A B) :
  formalPowerSeriesMap (Superoperator.comp g f) =
  Hom.comp (formalPowerSeriesMap g) (formalPowerSeriesMap f) := by
  have h :
    (fun k => exponentialDegreeMap (Superoperator.comp g f) k) =
    (fun k => Hom.comp (exponentialDegreeMap g k)
      (exponentialDegreeMap f k)) := by
    funext k
    exact exponentialDegreeMap_comp g f k
  rw [formalPowerSeriesMap, formalPowerSeriesMap, formalPowerSeriesMap, h]
  exact countableProductMap_comp
    (fun k => exponentialDegreeMap g k)
    (fun k => exponentialDegreeMap f k)
```

#### 4.4.754 Weakening is extraction of the constant coefficient

**Definition.** Weakening is extraction of the constant coefficient.

**Construction.** Constructed interactively; the goal is simplified using the definition of the formal power series, the definition of the exponential degree and the definition of the passage to superoperator module.

#### Lean 4 source `QLambda/Domain/Presheaf/Exponential.lean`

```
noncomputable def formalPowerSeriesWeakening (A : Nat) :
  Hom (formalPowerSeries A) (representable 1) :=
  by
    simp [formalPowerSeries, exponentialDegree,
      ClosedCoefficient.toModule] using
      (countableProductProjection
        (fun k => (exponentialDegree A k).toModule) 0)
```

#### 4.4.755 Dereliction is extraction of the linear coefficient

**Definition.** Dereliction is extraction of the linear coefficient.

**Construction.** Constructed interactively; the goal is simplified using the definition of the formal power series, the definition of the exponential degree and the definition of the passage to superoperator module.

#### Lean 4 source `QLambda/Domain/Presheaf/Exponential.lean`

```
noncomputable def formalPowerSeriesDereliction (A : Nat) :
  Hom (formalPowerSeries A) (representable A) :=
  by
    simp [formalPowerSeries, exponentialDegree,
      ClosedCoefficient.toModule] using
      (countableProductProjection
        (fun k => (exponentialDegree A k).toModule) 1)
```



#### 4.4.756 Maps into formal power series are exactly coefficientwise families of maps

**Definition.** Maps into formal power series are exactly coefficientwise families of maps. This is the premise-free formal-series universal property available before constructing a Day tensor with a non-representable input.

**Construction.** Defined to be the countable product equivalence of  $M$  and  $\text{fun } k \Rightarrow (\text{exponentialDegree } A \ k) . \text{toModule}$ .

##### Lean 4 source `QLambda/Domain/Presheaf/Exponential.lean`

```
noncomputable def formalPowerSeriesEquiv (M : Module.{u}) (A : Nat) :  
  Hom M (formalPowerSeries A) ?  
  forall k, Hom M (exponentialDegree A k).toModule :=  
  countableProductEquiv M  
  (fun k => (exponentialDegree A k).toModule)
```

#### 4.4.757 Tensor a superoperator with itself a specified number of times

**Definition.** Tensor a superoperator with itself a specified number of times.

**Construction.** Defined by cases on the input:  $0 \mapsto$  the identity on dimension 1;  $k + 1 \mapsto$  the tensor product of  $f$  and the tensor-power map of  $f$  and  $k$ .

##### Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
noncomputable def tensorPowerMap {A B : Nat}  
  (f : Superoperator A B) :  
  (k : Nat) ->  
  Superoperator (tensorPowerDimension A k)  
    (tensorPowerDimension B k)  
  | 0 => Superoperator.identity 1  
  | k + 1 => Superoperator.tensor f (tensorPowerMap f k)
```

#### 4.4.758 Tensor-power map of zero

**Statement.** For natural numbers  $A, B$ , a superoperator  $f$ : the tensor-power map of  $f$  at 0 equals the identity on dimension 1.

**Proof.** By definition. Unfolding the tensor-power map turns the left-hand side, the tensor-power map of  $f$  at 0, into the right-hand side, the identity on dimension 1; the two sides are the same term.

##### Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
theorem tensorPowerMap_zero {A B : Nat} (f : Superoperator A B) :  
  tensorPowerMap f 0 = Superoperator.identity 1 :=  
  rfl
```

#### 4.4.759 Tensor-power map of the successor

**Statement.** For natural numbers  $A, B, k$ , a superoperator  $f$ : the tensor-power map of  $f$  and the sum of  $k$  and 1 equals the tensor product of  $f$  and the tensor-power map of  $f$  and  $k$ .

**Proof.** By definition. Unfolding the tensor-power map turns the left-hand side, the tensor-power map of  $f$  and the sum of  $k$  and 1, into the right-hand side, the tensor product of  $f$  and the tensor-power map of  $f$  and  $k$ ; the two sides are the same term.

**Lean 4 source** `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
theorem tensorPowerMap_succ {A B : Nat} (f : Superoperator A B) (k : Nat) :
  tensorPowerMap f (k + 1) =
    Superoperator.tensor f (tensorPowerMap f k) :=
  rfl
```

#### 4.4.760 The tensor-power map preserves identities

**Statement.** For natural numbers  $A, k$ : the tensor-power map of the identity on dimension  $A$  and  $k$  equals the identity on dimension the dimension of a tensor power of  $A$  and  $k$ .

**Proof.** By induction on the natural number  $k$ . The case of zero is immediate; for a successor, the claim follows from the induction hypothesis. The key step rewrites with the tensor-power map of the successor and the tensor product of an identity.

**Lean 4 source** `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
theorem tensorPowerMap_identity (A k : Nat) :
  tensorPowerMap (Superoperator.identity A) k =
    Superoperator.identity (tensorPowerDimension A k) := by
  induction k with
  | zero => rfl
  | succ k ih =>
    rw [tensorPowerMap_succ, ih, Superoperator.tensor_identity]
    rfl
```

#### 4.4.761 The tensor-power map preserves composition

**Statement.** For natural numbers  $A, B, C, k$ , superoperators  $g, f$ : the tensor-power map of the composite of  $g$  after  $f$  and  $k$  equals the composite of the tensor-power map of  $g$  and  $k$  after the tensor-power map of  $f$  and  $k$ .

**Proof.** By induction on the natural number  $k$ . For zero, the claim is checked directly; for a successor, the claim follows from the induction hypothesis. The key step rewrites with the tensor-power map of the successor, the fact that parallel composition is a bifunctor: it preserves sequential composition in both arguments and the identity of a composite for superoperators.

**Lean 4 source** `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
theorem tensorPowerMap_comp {A B C : Nat}
  (g : Superoperator B C) (f : Superoperator A B) (k : Nat) :
  tensorPowerMap (Superoperator.comp g f) k =
    Superoperator.comp (tensorPowerMap g k) (tensorPowerMap f k) := by
  induction k with
  | zero => exact (Superoperator.identity_comp _).symm
  | succ k ih =>
    rw [tensorPowerMap_succ, tensorPowerMap_succ,
        tensorPowerMap_succ, ih, Superoperator.tensor_comp]
```

rfl

#### 4.4.762 The degree-k homogeneous coefficient of the representable exponential skeleton

**Definition.** The degree-k homogeneous coefficient of the representable exponential skeleton.

**Construction.** Defined to be the representable module of the dimension of a tensor power of A and k.

**Lean 4 source** [QLambda/Domain/Presheaf/ExponentialCore.lean](#)

```
def exponentialDegree (A k : Nat) : ClosedCoefficient :=  
  .representable (tensorPowerDimension A k)
```

#### 4.4.763 All homogeneous coefficients, indexed countably by degree

**Definition.** All homogeneous coefficients, indexed countably by degree.

**Construction.** Defined to be the exponential degree of A.

**Lean 4 source** [QLambda/Domain/Presheaf/ExponentialCore.lean](#)

```
def exponentialSkeleton (A : Nat) : Nat -> ClosedCoefficient :=  
  exponentialDegree A
```

#### 4.4.764 Exponential skeleton of zero

**Statement.** For a natural number A: the exponential skeleton of A at 0 equals the representable module at 1.

**Proof.** By definition. Unfolding the exponential skeleton turns the left-hand side, the exponential skeleton of A at 0, into the right-hand side, the representable module at 1; the two sides are the same term.

**Lean 4 source** [QLambda/Domain/Presheaf/ExponentialCore.lean](#)

```
theorem exponentialSkeleton_zero (A : Nat) :  
  exponentialSkeleton A 0 = .representable 1 :=  
  rfl
```

#### 4.4.765 Exponential skeleton of one

**Statement.** For a natural number A: the exponential skeleton of A at 1 equals the representable module of A.

**Proof.** The goal is simplified using the definition of the exponential skeleton and the definition of the exponential degree.

**Lean 4 source** [QLambda/Domain/Presheaf/ExponentialCore.lean](#)

```
theorem exponentialSkeleton_one (A : Nat) :  
  exponentialSkeleton A 1 = .representable A := by  
  simp [exponentialSkeleton, exponentialDegree]
```

#### 4.4.766 Exponential skeleton of the successor

**Statement.** For natural numbers  $A, k$ : the exponential skeleton of  $A$  and the sum of  $k$  and  $1$  equals the representable module of the product of  $A$  and the dimension of a tensor power of  $A$  and  $k$ .

**Proof.** By definition. Unfolding the exponential skeleton turns the left-hand side, the exponential skeleton of  $A$  and the sum of  $k$  and  $1$ , into the right-hand side, the representable module of the product of  $A$  and the dimension of a tensor power of  $A$  and  $k$ ; the two sides are the same term.

**Lean 4 source** `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
theorem exponentialSkeleton_succ (A k : Nat) :
  exponentialSkeleton A (k + 1) =
    .representable (A * tensorPowerDimension A k) :=
  rfl
```

#### 4.4.767 Functorial action on each homogeneous coefficient

**Definition.** Functorial action on each homogeneous coefficient.

**Construction.** Defined to be the Yoneda image of the tensor-power map of  $f$  and  $k$ .

**Lean 4 source** `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
noncomputable def exponentialDegreeMap {A B : Nat}
  (f : Superoperator A B) (k : Nat) :
  Hom (exponentialDegree A k).toModule
    (exponentialDegree B k).toModule :=
  yonedaMap (tensorPowerMap f k)
```

#### 4.4.768 The exponential degree functorial action preserves identities

**Statement.** For natural numbers  $A, k$ : the exponential degree functorial action of the identity on dimension  $A$  and  $k$  equals the identity of  $(\text{exponentialDegree } A \ k).toModule$ .

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the definition of the exponential degree functorial action, the fact that the tensor-power map preserves identities and the fact that the Yoneda image preserves identities.

**Lean 4 source** `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
theorem exponentialDegreeMap_identity (A k : Nat) :
  exponentialDegreeMap (Superoperator.identity A) k =
    Hom.id (exponentialDegree A k).toModule := by
  rw [exponentialDegreeMap, tensorPowerMap_identity, yonedaMap_id]
  ext n x
  rfl
```

#### 4.4.769 The exponential degree functorial action preserves composition

**Statement.** For natural numbers  $A, B, C, k$ , superoperators  $g, f$ : the exponential degree functorial action of the composite of  $g$  after  $f$  and  $k$  equals the composite of the exponential degree functorial action of  $g$  and  $k$  after the exponential degree functorial action of  $f$  and  $k$ .

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the definition of the exponential degree functorial action, the fact that the tensor-power map preserves composition and the fact that the Yoneda image preserves composition.

#### Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
theorem exponentialDegreeMap_comp {A B C : Nat}
  (g : Superoperator B C) (f : Superoperator A B) (k : Nat) :
  exponentialDegreeMap (Superoperator.comp g f) k =
  Hom.comp (exponentialDegreeMap g k)
  (exponentialDegreeMap f k) := by
  rw [exponentialDegreeMap, tensorPowerMap_comp, yonedaMap_comp]
  ext n x
  rfl

/ -! ## Countable products of concrete modules -/
```

#### 4.4.770 The countable product of fibers, with partial sums defined coefficientwise

**Definition.** The countable product of fibers, with partial sums defined coefficientwise.

**Construction.** Constructed by supplying each component: carrier, zero, summation, uniqueness, empty, singleton, remove zero and reindexing, among others. The accompanying laws are verified from the definitions.

#### Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
noncomputable def countableProductFiber
  (X : Nat -> Fiber.{u}) : Fiber.{u} where
  Carrier := forall k, (X k).Carrier
  zero := fun _ => 0
  summation :=
  { HasSum := fun f x =>
    forall k, (X k).HasSum (fun i => f i k) (x k)
  unique := by
    intro ? _ f x y hx hy
    funext k
    exact (X k).summation.unique (hx k) (hy k)
  empty := by
    intro k
    convert (X k).summation.empty using 1
  singleton := by
    intro x k
    exact (X k).summation.singleton (x k)
  remove_zero := by
    intro ? _ f s x hzero
    constructor <=> intro h k
    * exact ((X k).summation.remove_zero
      (fun i => f i k) s (x k)
      (fun i hi => congrFun (hzero i hi) k)).mp (h k)
    * exact ((X k).summation.remove_zero
      (fun i => f i k) s (x k)
      (fun i hi => congrFun (hzero i hi) k)).mpr (h k)
  reindex := by
    intro ? ? _ _ e f x
```

```

    constructor <;> intro h k
    * exact ((X k).summation.reindex e
      (fun i => f i k) (x k)).mp (h k)
    * exact ((X k).summation.reindex e
      (fun i => f i k) (x k)).mpr (h k)
flatten := by
  classical
  intro ? _ ? _ f x
  constructor
  * intro h
    have hk : forall k, exists g : ? -> (X k).Carrier,
      (forall i, (X k).HasSum (fun j => f i j k) (g i)) /\
      (X k).HasSum g (x k) := by
      intro k
      exact ((X k).summation.flatten
        (fun i j => f i j k) (x k)).mp (h k)
    choose g hrows hsum using hk
    refine <fun i k => g k i, ?_, ?_>
    * intro i k
      exact hrows k i
    * intro k
      exact hsum k
  * rintro <g, hrows, hsum> k
    exact ((X k).summation.flatten
      (fun i j => f i j k) (x k)).mpr
      <fun i => g i k, fun i => hrows i k, hsum k> }

```

#### 4.4.771 A family indexed by $\mathbb{N}$ with exactly one nonzero coordinate has the expected sum in every partial-countable-sum fiber

**Statement.** A family indexed by  $\mathbb{N}$  with exactly one nonzero coordinate has the expected sum in every partial-countable-sum fiber. Formally:  $X.\text{HasSum } \text{fun } i \Rightarrow a$ .

**Proof.** Both sides are compared pointwise (by extensionality). The goal is simplified using standard identities for sets.

#### Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```

theorem Fiber.hasSum_singleCoordinate (X : Fiber.{u}) (k : Nat)
  (a : X.Carrier) :
  X.HasSum (fun i : Nat => if i = k then a else 0) a := by
  let e : PUnit ? ({k} : Set Nat) := (Equiv.Set.singleton k).symm
  have hs : X.HasSum
    (fun i : ({k} : Set Nat) =>
      if (i : Nat) = k then a else 0) a := by
  apply (X.summation.reindex e
    (fun i : ({k} : Set Nat) =>
      if (i : Nat) = k then a else 0) a).mp
  convert X.summation.singleton a using 1
  funext p
  have hp : (e p : Nat) = k := (e p).property
  simp [hp]
  exact (X.summation.remove_zero
    (fun i : Nat => if i = k then a else 0)
    ({k} : Set Nat) a (by

```

```

intro i hi
simp only [Set.mem_singleton_iff] at hi
simp [hi])).mp hs

```

#### 4.4.772 A one-supported family over any countable decidable index has its nonzero value as sum

**Statement.** A one-supported family over any countable decidable index has its nonzero value as sum. Formally:  $X.HasSum \text{ fun } i \text{ a.}$

**Proof.** Both sides are compared pointwise (by extensionality). The goal is simplified using standard identities for sets.

#### Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```

theorem Fiber.hasSum_singleAt (X : Fiber.{u}) {? : Type}
  [Countable ?] [DecidableEq ?] (k : ?) (a : X.Carrier) :
  X.HasSum (fun i : ? => if i = k then a else 0) a := by
  let e : PUnit ? ({k} : Set ?) := (Equiv.Set.singleton k).symm
  have hs : X.HasSum
    (fun i : ({k} : Set ?) =>
      if (i : ?) = k then a else 0) a := by
  apply (X.summation.reindex e
    (fun i : ({k} : Set ?) =>
      if (i : ?) = k then a else 0) a).mp
  convert X.summation.singleton a using 1
  funext p
  have hp : (e p : ?) = k := (e p).property
  simp [hp]
exact (X.summation.remove_zero
  (fun i : ? => if i = k then a else 0)
  ({k} : Set ?) a (by
    intro i hi
    simp only [Set.mem_singleton_iff] at hi
    simp [hi])).mp hs

```

#### 4.4.773 The countable product of modules

**Definition.** The countable product of modules. Both the base action and all partial sums are pointwise in the coefficient index.

**Construction.** Constructed by supplying each component: act, act zero element, act zero functorial action, act identity, act composite, act sum element, act sum functorial action and act sum from one, among others. The accompanying laws are verified from the definitions.

#### Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```

noncomputable def countableProduct
  (F : Nat -> Module.{u}) : Module.{u} where
  obj n := countableProductFiber (fun k => (F k).obj n)
  act := fun x f k => (F k).act (x k) f
  act_zero_element := by
    intro m n f
    funext k
    exact (F k).act_zero_element f

```

```

act_zero_map := by
  intro m n x
  funext k
  exact (F k).act_zero_map (x k)
act_id := by
  intro n x
  funext k
  exact (F k).act_id (x k)
act_comp := by
  intro ? m n x f g
  funext k
  exact (F k).act_comp (x k) f g
act_sum_element := by
  intro ? _ m n x s f h k
  exact (F k).act_sum_element f (h k)
act_sum_map := by
  intro ? _ m n x f s h k
  exact (F k).act_sum_map (x k) h
act_sum_from_one := by
  intro ? _ m x s f h
  have hk : forall k, exists z, ((F k).obj m).HasSum
    (fun i => (F k).act (x i k) (f i)) z :=
    fun k => (F k).act_sum_from_one f (h k)
  choose z hz using hk
  exact <z, hz>
act_sum_tensor_from_one := by
  intro ? _ m B x s f h
  have hk : forall k, exists z, ((F k).obj (m * B)).HasSum
    (fun i =>
      (F k).act (x i k)
      (Superoperator.tensor (f i)
        (Superoperator.identity B))) z :=
    fun k => (F k).act_sum_tensor_from_one f (h k)
  choose z hz using hk
  exact <z, hz>

```

#### 4.4.774 Projection from a countable product to one coefficient

**Definition.** Projection from a countable product to one coefficient.

**Construction.** Constructed by supplying each component: application, functorial action zero, functorial action sum and naturality. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/Presheaf/ExponentialCore.lean](#)

```

noncomputable def countableProductProjection
  (F : Nat -> Module.{u}) (k : Nat) :
  Hom (countableProduct F) (F k) where
  app := fun _ x => x k
  map_zero := fun _ => rfl
  map_sum := fun h => h k
  naturality := fun _ _ => rfl

```



#### 4.4.775 Injection of one coefficient into a countable product

**Definition.** Injection of one coefficient into a countable product.

**Construction.** Constructed by supplying each component: application, functorial action zero, functorial action sum and naturality. The accompanying laws are verified from the definitions.

**Lean 4 source** `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
noncomputable def countableProductInjection
  (F : Nat -> Module.{u}) (k : Nat) :
  Hom (F k) (countableProduct F) where
  app := fun _ x j =>
    if h : j = k then h.symm |> x else 0
  map_zero := by
    intro n
    funext j
    change (if h : j = k then h.symm |> (0 : (F k).obj n |>.Carrier)
      else 0) = (0 : (F j).obj n |>.Carrier)
    by_cases hj : j = k
    * subst j
      simp
    * simp [hj]
  map_sum := by
    intro ?_ n f x h j
    by_cases hj : j = k
    * subst j
      simp using h
    * simp [hj] using Fiber.hasSum_zero ((F j).obj n)
  naturality := by
    intro m n x f
    funext j
    change
      (if h : j = k then h.symm |> (F k).act x f else 0) =
      (F j).act (if h : j = k then h.symm |> x else 0) f
    by_cases hj : j = k
    * subst j
      simp
    * simp only [hj, dite_false]
      exact ((F j).act_zero_element f).symm
```

#### 4.4.776 Every element of a countable product is the partial sum of its coordinate injections

**Statement.** Every element of a countable product is the partial sum of its coordinate injections. Formally:  
(countableProduct F).obj n |>.HasSum (fun k => (countableProductInjection F k).app n (x k)) x.

**Proof.** Both sides are compared pointwise (by extensionality). The argument splits on the relevant condition. An equation between variables is used to substitute one for the other. The goal is simplified using the fact that observational equality is symmetric.

**Lean 4 source** `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
theorem countableProduct_hasSum_coordinates
  (F : Nat -> Module.{u}) (n : Nat)
```

```

(x : (countableProduct F).obj n |>.Carrier) :
(countableProduct F).obj n |>.HasSum
  (fun k => (countableProductInjection F k).app n (x k)) x := by
intro j
change (F j).obj n |>.HasSum
  (fun k => if h : j = k then h |> x k else 0) (x j)
have hs := Fiber.hasSum_singleCoordinate ((F j).obj n) j (x j)
convert hs using 1
funext k
by_cases h : j = k
* subst k
  simp
* simp [h, Ne.symm h]

```

#### 4.4.777 Maps out of a countable product are determined by all coordinate inclusions

**Statement.** Maps out of a countable product are determined by all coordinate inclusions. This is the maps-out uniqueness half that does not require any additional summability premise. Formally:  $f = g$ .

**Proof.** Both sides are compared pointwise (by extensionality). It follows from the extensionality for module morphisms and congruence of function application.

#### Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```

theorem countableProductHom_ext {F : Nat -> Module.{u}} {L : Module.{v}}
  {f g : Hom (countableProduct F) L}
  (h : forall k,
    Hom.comp f (countableProductInjection F k) =
    Hom.comp g (countableProductInjection F k)) :
  f = g := by
apply Hom.ext
intro n x
have hf := f.map_sum (countableProduct_hasSum_coordinates F n x)
have hg := g.map_sum (countableProduct_hasSum_coordinates F n x)
apply (L.obj n).summation.unique hf
convert hg using 1
funext k
exact congrArg (fun ? => ?.app n (x k)) (h k)

```

#### 4.4.778 Uniform varying-domain budget supplied by the product universal property

**Statement.** Uniform varying-domain budget supplied by the product universal property. The maps in the homogeneous components may have unrelated codomain dimensions internally; after choosing all precomposition elements in one product fiber over  $n$ , every resulting branch has the common type `Superoperator n B`, and `Hom.map_sum` proves their joint Choi sum. Formally: `SigmaMon.ChoiSum.HasSum (fun k => (Hom.comp f (countableProductInjection F k)).app n (x k)) (f.app n x)`.

**Proof.** The goal is simplified using the definition of the composition.

#### Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```

theorem countableProductHom_components_hasSum
  {F : Nat -> Module.{u}} {B n : Nat}
  (f : Hom (countableProduct F) (representable B))
  (x : (countableProduct F).obj n |>.Carrier) :
  SigmaMon.ChoiSum.HasSum
  (fun k =>
    (Hom.comp f (countableProductInjection F k)).app n (x k))
  (f.app n x) := by
  have h := f.map_sum (countableProduct_hasSum_coordinates F n x)
  change SigmaMon.ChoiSum.HasSum
  (fun k => f.app n ((countableProductInjection F k).app n (x k)))
  (f.app n x) at h
  simpa [Hom.comp] using h

```

#### 4.4.779 Countable product morphism of the finite of the components of the trace non-increasing

**Statement.** Every finite collection of homogeneous branches of a map from a countable product to a representable has a jointly TNI CP aggregate. Formally:  $\exists \Psi : \text{Superoperator } n \text{ B}, \Psi.\text{cp} = \sum k \in s, ((\text{Hom.comp } f (\text{countableProductInjection } F \text{ } k)).\text{app } n (x \text{ } k)).\text{cp}$ .

**Proof.** It follows from the fact that the intrinsic CP map of a finite approximant is the ordinary finite sum of the selected branch CP maps.

**Lean 4 source** [QLambda/Domain/Presheaf/ExponentialCore.lean](#)

```

theorem countableProductHom_finite_components_tni
  {F : Nat -> Module.{u}} {B n : Nat}
  (f : Hom (countableProduct F) (representable B))
  (x : (countableProduct F).obj n |>.Carrier) (s : Finset Nat) :
  exists ? : Superoperator n B,
  ?.cp =
    ? k in s,
    ((Hom.comp f (countableProductInjection F k)).app n
      (x k)).cp := by
  exact SigmaMon.ChoiSum.finite_subfamily_cp_sum
  (countableProductHom_components_hasSum f x) s

```

#### 4.4.780 A family of maps into the coefficients induces a map into the countable product

**Definition.** A family of maps into the coefficients induces a map into the countable product.

**Construction.** Constructed by supplying each component: application, functorial action zero, functorial action sum and naturality. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/Presheaf/ExponentialCore.lean](#)

```

noncomputable def countableProductLift {M : Module.{u}}
  (F : Nat -> Module.{v}) (f : forall k, Hom M (F k)) :
  Hom M (countableProduct F) where
  app := fun n x k => (f k).app n x
  map_zero := by
    intro n
    funext k
    exact (f k).map_zero n

```

```

map_sum := by
  intro ? _ n g x h k
  exact (f k).map_sum h
naturalness := by
  intro m n x g
  funext k
  exact (f k).naturalness x g

```

#### 4.4.781 The concrete universal property of the countable product

**Definition.** The concrete universal property of the countable product.

**Construction.** Constructed by supplying each component: inverse fun, left inverse and right inverse. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/Presheaf/ExponentialCore.lean](#)

```

noncomputable def countableProductEquiv (M : Module.{u})
  (F : Nat -> Module.{v}) :
  Hom M (countableProduct F) ? forall k, Hom M (F k) where
toFun f k := Hom.comp (countableProductProjection F k) f
invFun := countableProductLift F
left_inv := by
  intro f
  ext n x
  funext k
  rfl
right_inv := by
  intro f
  funext k
  ext n x
  rfl

```

#### 4.4.782 Pointwise action of a family of maps on countable products

**Definition.** Pointwise action of a family of maps on countable products.

**Construction.** Defined by an explicit formula built from the countable product lift, the composition and the countable product projection.

**Lean 4 source** [QLambda/Domain/Presheaf/ExponentialCore.lean](#)

```

noncomputable def countableProductMap {F : Nat -> Module.{u}}
  {G : Nat -> Module.{v}} (f : forall k, Hom (F k) (G k)) :
  Hom (countableProduct F) (countableProduct G) :=
countableProductLift G
  (fun k => Hom.comp (f k) (countableProductProjection F k))

```

#### 4.4.783 The countable product functorial action preserves identities

**Statement.** The countable product functorial action of  $\text{fun } k \Rightarrow \text{Hom.id } (F \ k)$  equals the identity of the countable product of  $F$ .

**Proof.** Both sides are compared pointwise (by extensionality).

#### Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
theorem countableProductMap_id (F : Nat -> Module.{u}) :
  countableProductMap (fun k => Hom.id (F k)) =
    Hom.id (countableProduct F) := by
  ext n x
  funext k
  rfl
```

#### 4.4.784 The countable product functorial action preserves composition

**Statement.** The countable product functorial action of  $\text{fun } k \Rightarrow \text{Hom.comp } (g \ k) \ (f \ k)$  equals the composite of the countable product functorial action of  $g$  after the countable product functorial action of  $f$ .

**Proof.** Both sides are compared pointwise (by extensionality).

#### Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
theorem countableProductMap_comp
  {F : Nat -> Module.{u}} {G : Nat -> Module.{v}}
  {H : Nat -> Module.{w}} (g : forall k, Hom (G k) (H k))
  (f : forall k, Hom (F k) (G k)) :
  countableProductMap (fun k => Hom.comp (g k) (f k)) =
    Hom.comp (countableProductMap g) (countableProductMap f) := by
  ext n x
  funext k
  rfl

/--! ## Symmetric formal power series and their tensor square -/
```

#### 4.4.785 The degree-k symmetric homogeneous coefficient

**Definition.** The degree-k symmetric homogeneous coefficient.

**Construction.** Defined to be the symmetric power of  $A$  and  $k$ .

#### Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
def symmetricExponentialDegree (A k : Nat) : ClosedCoefficient :=
  .symmetricPower A k
```

#### 4.4.786 Formal power series on the concrete symmetric-power invariants

**Definition.** Formal power series on the concrete symmetric-power invariants.

**Construction.** Defined to be the countable product of  $\text{fun } k \Rightarrow \text{symmetricPower } A \ k$ .

#### Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
noncomputable def symmetricFormalPowerSeries (A : Nat) : Module :=
  countableProduct (fun k => symmetricPower A k)
```

#### 4.4.787 Restrict a map out of symmetric formal series to one homogeneous coefficient

**Definition.** Restrict a map out of symmetric formal series to one homogeneous coefficient.

**Construction.** Defined to be the composite of  $f$  after the countable product injection of  $\text{fun } j \Rightarrow \text{symmetricPower } A \ j$  and  $k$ .

**Lean 4 source** `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
noncomputable def symmetricHomogeneousComponent {A B : Nat}
  (f : Hom (symmetricFormalPowerSeries A) (representable B))
  (k : Nat) :
  Hom (symmetricPower A k) (representable B) :=
  Hom.comp f
  (countableProductInjection (fun j => symmetricPower A j) k)
```

#### 4.4.788 Extend a homogeneous component of a map out of symmetric series to the entire ambient representable tensor power

**Definition.** Extend a homogeneous component of a map out of symmetric series to the entire ambient representable tensor power.

**Construction.** Defined to be the extend from symmetric power of the symmetric homogeneous component of  $f$  and  $k$ .

**Lean 4 source** `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
noncomputable def symmetricHomogeneousComponentExtension {A B : Nat}
  (f : Hom (symmetricFormalPowerSeries A) (representable B))
  (k : Nat) :
  Hom (representable (tensorPowerDimension A k)) (representable B) :=
  extendFromSymmetricPower (symmetricHomogeneousComponent f k)
```

#### 4.4.789 Symmetric homogeneous component extension of the restrict

**Statement.** For natural numbers  $A, B, k$ , a module morphism  $f$ : the composite of the symmetric homogeneous component extension of  $f$  and  $k$  after the symmetric power inclusion of  $A$  and  $k$  equals the symmetric homogeneous component of  $f$  and  $k$ .

**Proof.** This is an instance of the extend from symmetric power of the inclusion.

**Lean 4 source** `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
theorem symmetricHomogeneousComponentExtension_restrict {A B : Nat}
  (f : Hom (symmetricFormalPowerSeries A) (representable B))
  (k : Nat) :
  Hom.comp (symmetricHomogeneousComponentExtension f k)
    (symmetricPowerInclusion A k) =
  symmetricHomogeneousComponent f k :=
  extendFromSymmetricPower_inclusion _
```

#### 4.4.790 The symmetric formal-series object belongs to the extended closed-generated fragment

**Definition.** The symmetric formal-series object belongs to the extended closed-generated fragment.

**Construction.** Constructed by supplying each component: module, basis, countable index, coefficient, ket, bra and resolves. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/Presheaf/ExponentialCore.lean](#)

```
noncomputable def closedSymmetricFormalPowerSeries
  (A : Nat) : ClosedGenerated where
  module := symmetricFormalPowerSeries A
  basis :=
    { Index := Nat
      countableIndex := inferInstance
      coeff := symmetricExponentialDegree A
      ket := fun k =>
        countableProductInjection (fun j => symmetricPower A j) k
      bra := fun k =>
        countableProductProjection (fun j => symmetricPower A j) k
      resolves := by
        intro n x k
        change ((symmetricPower A k).obj n).HasSum
          (fun i => if h : k = i then h |> x i else 0) (x k)
        have hs := Fiber.hasSum_singleCoordinate
          ((symmetricPower A k).obj n) k (x k)
        convert hs using 1
        funext i
        by_cases h : k = i
        * subst i
          simp
        * simp [h, Ne.symm h] }
```

#### 4.4.791 Promotion of a finite basis equivalence to all symmetric homogeneous degrees

**Definition.** Promotion of a finite basis equivalence to all symmetric homogeneous degrees.

**Construction.** Defined to be the countable product functorial action of  $\text{fun } k \Rightarrow \text{symmetricPowerEquivalence } e \ k$ .

**Lean 4 source** [QLambda/Domain/Presheaf/ExponentialCore.lean](#)

```
noncomputable def symmetricEquivalencePromotion {A B : Nat}
  (e : Fin A → Fin B) :
  Hom (symmetricFormalPowerSeries A)
    (symmetricFormalPowerSeries B) :=
  countableProductMap (fun k => symmetricPowerEquivalenceMap e k)
```

#### 4.4.792 Reflexivity of the symmetric equivalence promotion

**Statement.** For a natural number A: the symmetric equivalence promotion of the reflexivity of  $\text{Fin } A$  equals the identity of the symmetric formal power series of A.

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the definition of the symmetric equivalence promotion, the fact that the symmetric power equivalence functorial action preserves identities and the fact that the countable product functorial action preserves identities.

#### Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
theorem symmetricEquivalencePromotion_refl (A : Nat) :
  symmetricEquivalencePromotion (Equiv.refl (Fin A)) =
    Hom.id (symmetricFormalPowerSeries A) := by
  have h :
    (fun k => symmetricPowerEquivalenceMap
      (Equiv.refl (Fin A)) k) =
      (fun k => Hom.id (symmetricPower A k)) := by
    funext k
    exact symmetricPowerEquivalenceMap_refl A k
  rw [symmetricEquivalencePromotion, h]
  exact countableProductMap_id (fun k => symmetricPower A k)
```

#### 4.4.793 Transitivity of the symmetric equivalence promotion

**Statement.** For natural numbers  $A, B, C$ , indexes  $e, f$ : the symmetric equivalence promotion of the transitivity of  $f$  equals the composite of the symmetric equivalence promotion of  $f$  after the symmetric equivalence promotion of  $e$ .

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the definition of the symmetric equivalence promotion, the fact that the symmetric power equivalence functorial action preserves composition and the fact that the countable product functorial action preserves composition.

#### Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
theorem symmetricEquivalencePromotion_trans {A B C : Nat}
  (e : Fin A ? Fin B) (f : Fin B ? Fin C) :
  symmetricEquivalencePromotion (e.trans f) =
    Hom.comp (symmetricEquivalencePromotion f)
      (symmetricEquivalencePromotion e) := by
  have h :
    (fun k => symmetricPowerEquivalenceMap (e.trans f) k) =
      (fun k => Hom.comp (symmetricPowerEquivalenceMap f k)
        (symmetricPowerEquivalenceMap e k)) := by
    funext k
    exact symmetricPowerEquivalenceMap_trans e f k
  rw [symmetricEquivalencePromotion, symmetricEquivalencePromotion,
    symmetricEquivalencePromotion, h]
  exact countableProductMap_comp
    (fun k => symmetricPowerEquivalenceMap f k)
    (fun k => symmetricPowerEquivalenceMap e k)
```

#### 4.4.794 The degree-one basis equivalence observed by dereliction

**Definition.** The degree-one basis equivalence observed by dereliction.

**Construction.** Defined by an explicit formula built from the finite index congruence, the tensor product power dimension one and the tensor product tuple functorial action equivalence.



#### Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
noncomputable def symmetricPromotionLinearPart {A B : Nat}
  (e : Fin A ? Fin B) : Fin A ? Fin B :=
  (finCongr (tensorPowerDimension_one A)).symm |>.trans
  ((tensorTupleMapEquiv e 1).trans
   (finCongr (tensorPowerDimension_one B)))
```

#### 4.4.795 Coefficientwise Day tensor of two countable products of representables

**Definition.** Coefficientwise Day tensor of two countable products of representables.

**Construction.** Defined by an explicit formula built from the countable product and the Day tensor product representable.

#### Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
noncomputable def countableRepresentableDayTensor
  (F G : Nat -> Nat) : Module :=
  countableProduct (fun p =>
    countableProduct (fun q => dayTensorRepresentable (F p) (G q)))
```

#### 4.4.796 The coefficientwise Day tensor of two countable representable products is again closed-generated

**Definition.** The coefficientwise Day tensor of two countable representable products is again closed-generated, with the product basis indexed by  $\mathbb{N} \times \mathbb{N}$ .

**Construction.** Constructed by supplying each component: module, basis, countable index, coefficient, ket, bra and resolves. The accompanying laws are verified from the definitions.

#### Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
noncomputable def closedCountableRepresentableDayTensor
  (F G : Nat -> Nat) : ClosedGenerated where
  module := countableRepresentableDayTensor F G
  basis :=
  { Index := Nat x Nat
    countableIndex := inferInstance
    coeff := fun i => .representable (F i.1 * G i.2)
    ket := fun i =>
      Hom.comp
      (countableProductInjection
       (fun p => countableProduct
        (fun q => dayTensorRepresentable (F p) (G q))) i.1)
      (countableProductInjection
       (fun q => dayTensorRepresentable (F i.1) (G q)) i.2)
    bra := fun i =>
      Hom.comp
      (countableProductProjection
       (fun q => dayTensorRepresentable (F i.1) (G q)) i.2)
      (countableProductProjection
       (fun p => countableProduct
        (fun q => dayTensorRepresentable (F p) (G q))) i.1)
```

```

resolves := by
  intro n x p q
  have hs := Fiber.hasSum_singleAt
    ((representable (F p * G q)).obj n) (p, q) (x p q)
  convert hs using 1
  * funext i
    rcases i with <i, j>
    by_cases hp : p = i
    * subst i
      by_cases hq : q = j
      * subst j
        simp [Hom.comp, countableProductInjection,
          countableProductProjection,
          countableRepresentableDayTensor]
        rfl
      * simp [Hom.comp, countableProductInjection,
        countableProductProjection,
        countableRepresentableDayTensor, hq, Ne.symm hq]
        rfl
    * simp [Hom.comp, countableProductInjection,
      countableProductProjection, countableRepresentableDayTensor,
      hp, Ne.symm hp]
      rfl
  * rfl }

```

#### 4.4.797 Inclusion of one homogeneous pair into the coefficientwise Day tensor

**Definition.** Inclusion of one homogeneous pair into the coefficientwise Day tensor.

**Construction.** Defined by an explicit formula built from the composition, the countable product injection, the countable product and the Day tensor product representable.

**Lean 4 source** [QLambda/Domain/Presheaf/ExponentialCore.lean](#)

```

noncomputable def countableRepresentableDayTensorInjection
  (F G : Nat -> Nat) (p q : Nat) :
  Hom (dayTensorRepresentable (F p) (G q))
  (countableRepresentableDayTensor F G) :=
  Hom.comp
    (countableProductInjection
      (fun i => countableProduct
        (fun j => dayTensorRepresentable (F i) (G j))) p)
    (countableProductInjection
      (fun j => dayTensorRepresentable (F p) (G j)) q)

```

#### 4.4.798 Every coefficientwise tensor element is the sum of its pair coordinates

**Statement.** Every coefficientwise tensor element is the sum of its pair coordinates.

**Proof.** By case analysis on  $i$ . The goal is simplified using the definition of the countable representable Day tensor product injection, the definition of the composition, the definition of the countable product injection and the fact that observational equality is symmetric.

**Lean 4 source** [QLambda/Domain/Presheaf/ExponentialCore.lean](#)

```

theorem countableRepresentableDayTensor_hasSum_coordinates
  (F G : Nat -> Nat) (n : Nat)
  (x : (countableRepresentableDayTensor F G).obj n |>.Carrier) :
  (countableRepresentableDayTensor F G).obj n |>.HasSum
    (fun i : Nat x Nat =>
      (countableRepresentableDayTensorInjection F G i.1 i.2).app
        n (x i.1 i.2))
  x := by
intro p q
have hs := Fiber.hasSum_singleAt
  ((representable (F p * G q)).obj n) (p, q) (x p q)
convert hs using 1
funext i
rcases i with <i, j>
by_cases hp : p = i
* subst i
  by_cases hq : q = j
  * subst j
    simp [countableRepresentableDayTensorInjection, Hom.comp,
      countableProductInjection]
    rfl
  * simp [countableRepresentableDayTensorInjection, Hom.comp,
      countableProductInjection, hq, Ne.symm hq]
    rfl
* simp [countableRepresentableDayTensorInjection, Hom.comp,
  countableProductInjection, hp, Ne.symm hp]
  rfl

```

#### 4.4.799 Maps out of the coefficientwise tensor are uniquely determined by all homogeneous pair inclusions

**Statement.** Maps out of the coefficientwise tensor are uniquely determined by all homogeneous pair inclusions. Formally:  $f = g$ .

**Proof.** Both sides are compared pointwise (by extensionality). It follows from the extensionality for module morphisms and congruence of function application.

#### Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```

theorem countableRepresentableDayTensorHom_ext
  {F G : Nat -> Nat} {L : Module.{u}}
  {f g : Hom (countableRepresentableDayTensor F G) L}
  (h : forall p q,
    Hom.comp f (countableRepresentableDayTensorInjection F G p q) =
      Hom.comp g
        (countableRepresentableDayTensorInjection F G p q)) :
  f = g := by
apply Hom.ext
intro n x
have hf := f.map_sum
  (countableRepresentableDayTensor_hasSum_coordinates F G n x)
have hg := g.map_sum
  (countableRepresentableDayTensor_hasSum_coordinates F G n x)
apply (L.obj n).summation.unique hf
convert hg using 1

```

```

funext i
exact congrArg (fun ? => ?.app n (x i.1 i.2)) (h i.1 i.2)

```

#### 4.4.800 Homogeneous maps-out coefficients

**Definition.** Homogeneous maps-out coefficients.

**Construction.** Defined to be  $\forall p\ q, \text{Hom}(\text{dayTensorRepresentable}(F\ p)\ (G\ q))\ L$ .

**Lean 4 source** [QLambda/Domain/Presheaf/ExponentialCore.lean](#)

```

def CountableDayTensorComponents
  (F G : Nat -> Nat) (L : Module.{u}) :=
  forall p q, Hom (dayTensorRepresentable (F p) (G q)) L

```

#### 4.4.801 Restrict a map out of the coefficientwise tensor to every homogeneous pair

**Definition.** Restrict a map out of the coefficientwise tensor to every homogeneous pair.

**Construction.** The map sending  $p\ q$  to the composite of  $f$  after  $\text{countableRepresentableDayTensorInjection}\ F\ G\ p\ q$ .

**Lean 4 source** [QLambda/Domain/Presheaf/ExponentialCore.lean](#)

```

noncomputable def countableDayTensorComponents
  {F G : Nat -> Nat} {L : Module.{u}}
  (f : Hom (countableRepresentableDayTensor F G) L) :
  CountableDayTensorComponents F G L :=
  fun p q =>
    Hom.comp f (countableRepresentableDayTensorInjection F G p q)

```

#### 4.4.802 Definition of the countable Day tensor product components admissibility

**Definition.** Exact global admissibility condition required of a family of homogeneous maps before it can define a map out of the countable tensor.

**Construction.** Defined by an explicit formula built from the countable representable Day tensor product.

**Lean 4 source** [QLambda/Domain/Presheaf/ExponentialCore.lean](#)

```

def CountableDayTensorComponentsAdmissible
  {F G : Nat -> Nat} {L : Module.{u}}
  (c : CountableDayTensorComponents F G L) : Prop :=
  forall n (x : (countableRepresentableDayTensor F G).obj n |>.Carrier),
  exists s : (L.obj n).Carrier,
    (L.obj n).HasSum
      (fun i : Nat x Nat => (c i.1 i.2).app n (x i.1 i.2)) s

```

#### 4.4.803 Components of every existing map out satisfy global admissibility

**Statement.** Components of every existing map out satisfy global admissibility. Formally: `CountableDayTensorComponentsAdmissible (countableDayTensorComponents f)`.

**Proof.** Both sides are compared pointwise (by extensionality). Each component of the claim is established separately.

#### Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
theorem countableDayTensorComponents_admissible
  {F G : Nat -> Nat} {L : Module.{u}}
  (f : Hom (countableRepresentableDayTensor F G) L) :
  CountableDayTensorComponentsAdmissible
    (countableDayTensorComponents f) := by
  intro n x
  refine <f.app n x, ?_>
  convert f.map_sum
    (countableRepresentableDayTensor_hasSum_coordinates F G n x) using 1
  funext i
  rfl
```

#### 4.4.804 The unique sum selected by an admissible component family

**Definition.** The unique sum selected by an admissible component family.

**Construction.** Defined to be the choose of the hc of n and x.

#### Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
noncomputable def countableDayTensorComponentSum
  {F G : Nat -> Nat} {L : Module.{u}}
  (c : CountableDayTensorComponents F G L)
  (hc : CountableDayTensorComponentsAdmissible c)
  (n : Nat)
  (x : (countableRepresentableDayTensor F G).obj n |>.Carrier) :
  (L.obj n).Carrier :=
  Classical.choose (hc n x)
```

#### 4.4.805 Specification of the countable Day tensor product component sum

**Statement.** For a superoperator module L, a natural number n: if `CountableDayTensorComponentsAdmissible c`, then the family `fun i sums to countableDayTensorComponentSum c hc n x`.

**Proof.** The proof term combines the facts named in it directly.

#### Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
theorem countableDayTensorComponentSum_spec
  {F G : Nat -> Nat} {L : Module.{u}}
  (c : CountableDayTensorComponents F G L)
  (hc : CountableDayTensorComponentsAdmissible c)
  (n : Nat)
  (x : (countableRepresentableDayTensor F G).obj n |>.Carrier) :
```

```

(L.obj n).HasSum
  (fun i : Nat x Nat => (c i.1 i.2).app n (x i.1 i.2))
  (countableDayTensorComponentSum c hc n x) :=
Classical.choose_spec (hc n x)

```

#### 4.4.806 Exchange the two indices of a nondependent sigma type

**Definition.** Exchange the two indices of a nondependent sigma type.

**Construction.** Constructed by supplying each component of the structure explicitly.

**Lean 4 source** [QLambda/Domain/Presheaf/ExponentialCore.lean](#)

```

def sigmaSwapEquiv (a b : Type) : (Sigma _ : a, b) ? (Sigma _ : b, a) where
  toFun p := <p.2, p.1>
  invFun p := <p.2, p.1>
  left_inv _ := rfl
  right_inv _ := rfl

```

#### 4.4.807 An admissible homogeneous component family defines a genuine map out of the countable coefficientwise Day tensor

**Definition.** An admissible homogeneous component family defines a genuine map out of the countable coefficientwise Day tensor.

**Construction.** Constructed by supplying each component: application, functorial action zero, functorial action sum and naturality. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/Presheaf/ExponentialCore.lean](#)

```

noncomputable def countableDayTensorHomOfComponents
  {F G : Nat -> Nat} {L : Module.{u}}
  (c : CountableDayTensorComponents F G L)
  (hc : CountableDayTensorComponentsAdmissible c) :
  Hom (countableRepresentableDayTensor F G) L where
  app := countableDayTensorComponentSum c hc
  map_zero := by
    intro n
    apply (L.obj n).summation.unique
      (countableDayTensorComponentSum_spec c hc n 0)
  have hz := Fiber.hasSum_zero (L.obj n) (? := Nat x Nat)
  convert hz using 1
  funext i
  exact (c i.1 i.2).map_zero n
  map_sum := by
    intro ? _ n f s h
    let a : (i : ?) -> (Nat x Nat) -> (L.obj n).Carrier :=
      fun i pq => (c pq.1 pq.2).app n (f i pq.1 pq.2)
    have hcols (pq : Nat x Nat) :
      (L.obj n).HasSum (fun i => a i pq)
        ((c pq.1 pq.2).app n (s pq.1 pq.2)) :=
      (c pq.1 pq.2).map_sum (h pq.1 pq.2)
    have htotal :
      (L.obj n).HasSum

```

```

      (fun pq : Nat x Nat =>
        (c pq.1 pq.2).app n (s pq.1 pq.2))
      (countableDayTensorComponentSum c hc n s) :=
countableDayTensorComponentSum_spec c hc n s
have hflat :
  (L.obj n).HasSum
    (fun p : Sigma _ : Nat x Nat, ? => a p.2 p.1)
    (countableDayTensorComponentSum c hc n s) :=
  ((L.obj n).summation.flatten
    (fun pq i => a i pq)
    (countableDayTensorComponentSum c hc n s)).mpr
    <fun pq => (c pq.1 pq.2).app n (s pq.1 pq.2),
      hcols, httotal>
have hflat' :
  (L.obj n).HasSum
    (fun p : Sigma _ : ?, Nat x Nat => a p.1 p.2)
    (countableDayTensorComponentSum c hc n s) := by
exact ((L.obj n).summation.reindex
  (sigmaSwapEquiv ? (Nat x Nat))
  (fun p : Sigma _ : Nat x Nat, ? => a p.2 p.1)
  (countableDayTensorComponentSum c hc n s)).mpr hflat
rcases ((L.obj n).summation.flatten
  (fun i pq => a i pq)
  (countableDayTensorComponentSum c hc n s)).mp hflat' with
  <g, hrows, hgsum>
apply (L.obj n).hasSum_congr (x :=
  countableDayTensorComponentSum c hc n s) ?_ |>.mpr hgsum
intro i
exact (L.obj n).summation.unique
  (countableDayTensorComponentSum_spec c hc n (f i))
  (hrows i)
naturality := by
  intro m n x f
  have hleft :
    (L.obj m).HasSum
      (fun i : Nat x Nat =>
        (c i.1 i.2).app m
          (((countableRepresentableDayTensor F G).act x f)
            i.1 i.2))
      (countableDayTensorComponentSum c hc m
        ((countableRepresentableDayTensor F G).act x f)) :=
countableDayTensorComponentSum_spec c hc m _
  have hright :
    (L.obj m).HasSum
      (fun i : Nat x Nat =>
        (c i.1 i.2).app m
          (((countableRepresentableDayTensor F G).act x f)
            i.1 i.2))
      (L.act (countableDayTensorComponentSum c hc n x) f) := by
  have hs := L.act_sum_element f
    (countableDayTensorComponentSum_spec c hc n x)
  convert hs using 1
  funext i
  exact (c i.1 i.2).naturality (x i.1 i.2) f
exact (L.obj m).summation.unique hleft hright

```

#### 4.4.808 Restriction to homogeneous components is injective

**Statement.** Restriction to homogeneous components is injective.

**Proof.** It follows from the fact that maps out of the coefficientwise tensor are uniquely determined by all homogeneous pair inclusions.

**Lean 4 source** [QLambda/Domain/Presheaf/ExponentialCore.lean](#)

```
theorem countableDayTensorComponents_injective
  {F G : Nat -> Nat} {L : Module.{u}} :
  Function.Injective
    (countableDayTensorComponents :
      Hom (countableRepresentableDayTensor F G) L ->
        CountableDayTensorComponents F G L) := by
  intro f g h
  apply countableRepresentableDayTensorHom_ext
  intro p q
  exact congrFun (congrFun h p) q
```

#### 4.4.809 Countable Day tensor product morphism of components of the components

**Statement.** For a superoperator module  $L$ , a module morphism  $f$ : the countable Day tensor product morphism of components of the countable Day tensor product components of  $f$  and the countable Day tensor product components admissibility of  $f$  equals  $f$ .

**Proof.** Both sides are compared pointwise (by extensionality). It follows from the extensionality for module morphisms.

**Lean 4 source** [QLambda/Domain/Presheaf/ExponentialCore.lean](#)

```
theorem countableDayTensorHomOfComponents_components
  {F G : Nat -> Nat} {L : Module.{u}}
  (f : Hom (countableRepresentableDayTensor F G) L) :
  countableDayTensorHomOfComponents
    (countableDayTensorComponents f)
    (countableDayTensorComponents_admissible f) =
  f := by
  apply Hom.ext
  intro n x
  apply (L.obj n).summation.unique
    (countableDayTensorComponentSum_spec
      (countableDayTensorComponents f)
      (countableDayTensorComponents_admissible f) n x)
  convert f.map_sum
    (countableRepresentableDayTensor_hasSum_coordinates F G n x) using 1
  funext i
  rfl
```

#### 4.4.810 The canonical bilinear map into the coefficientwise Day tensor

**Definition.** The canonical bilinear map into the coefficientwise Day tensor.



**Construction.** Constructed by supplying each component: application, functorial action zero left, functorial action zero right, functorial action sum left, functorial action sum right and naturality. The accompanying laws are verified from the definitions.

**Lean 4 source** `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
noncomputable def countableRepresentableDayTensorIntro
  (F G : Nat -> Nat) :
  Bilinear
    (countableProduct (fun p => representable (F p)))
    (countableProduct (fun q => representable (G q)))
    (countableRepresentableDayTensor F G) where
  app := fun x y p q => Superoperator.tensor (x p) (y q)
  map_zero_left := by
    intro m n y
    funext p q
    exact Superoperator.tensor_zero_left (y q)
  map_zero_right := by
    intro m n x
    funext p q
    exact Superoperator.tensor_zero_right (x p)
  map_sum_left := by
    intro ? _ m n x s y h p q
    exact SigmaMon.ChoiSum.tensor_hasSum_left (h p) (y q)
  map_sum_right := by
    intro ? _ m n x y s h p q
    exact SigmaMon.ChoiSum.tensor_hasSum_right (x p) (h q)
  naturality := by
    intro m' m n' n x y f g
    funext p q
    exact Superoperator.tensor_comp (x p) f (y q) g
```

#### 4.4.811 The coefficientwise Day tensor square of symmetric formal series

**Definition.** The coefficientwise Day tensor square of symmetric formal series. Its  $(p, q)$  coefficient is the already-proved Day tensor of the two ambient representable tensor powers.

**Construction.** Defined to be the countable representable Day tensor product of the dimension of a tensor power of  $A$ .

**Lean 4 source** `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
noncomputable def symmetricFormalTensorSquare (A : Nat) : Module :=
  countableRepresentableDayTensor
    (tensorPowerDimension A) (tensorPowerDimension A)
```

#### 4.4.812 The tensor square used by contraction is itself in the generated fragment

**Definition.** The tensor square used by contraction is itself in the generated fragment.

**Construction.** Defined to be the closed term countable representable Day tensor product of the dimension of a tensor power of  $A$ .

**Lean 4 source** `QLambda/Domain/Presheaf/ExponentialCore.lean`

```

noncomputable def closedSymmetricFormalTensorSquare
  (A : Nat) : ClosedGenerated :=
  closedCountableRepresentableDayTensor
    (tensorPowerDimension A) (tensorPowerDimension A)

```

#### 4.4.813 Closed term symmetric formal tensor product square of the module

**Statement.** For a natural number  $A$ :  $(\text{closedSymmetricFormalTensorSquare } A).module$  equals the symmetric formal tensor product square of  $A$ .

**Proof.** By definition. Unfolding the module turns the left-hand side,  $(\text{closedSymmetricFormalTensorSquare } A).module$ , into the right-hand side, the symmetric formal tensor product square of  $A$ ; the two sides are the same term.

#### Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```

theorem closedSymmetricFormalTensorSquare_module (A : Nat) :
  (closedSymmetricFormalTensorSquare A).module =
    symmetricFormalTensorSquare A :=
  rfl

```

#### 4.4.814 Promotion on the coefficientwise tensor square

**Definition.** Promotion on the coefficientwise tensor square.

**Construction.** Constructed by supplying each component: application, functorial action zero, functorial action sum and naturality. The accompanying laws are verified from the definitions.

#### Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```

noncomputable def symmetricTensorSquareEquivalenceMap {A B : Nat}
  (e : Fin A → Fin B) :
  Hom (symmetricFormalTensorSquare A)
    (symmetricFormalTensorSquare B) where
  app := fun _ x p q =>
    Superoperator.comp
      (Superoperator.ofEquivalence (homogeneousPairMapEquiv e p q))
      (x p q)
  map_zero := by
    intro n
    funext p q
    exact Superoperator.comp_zero_right _
  map_sum := by
    intro ? _ n f x h p q
    exact SigmaMon.ChoiSum.comp_left
      (Superoperator.ofEquivalence (homogeneousPairMapEquiv e p q))
      (h p q)
  naturality := by
    intro m n x f
    funext p q
    exact Superoperator.comp_assoc _ _ _

```

#### 4.4.815 Contraction splits every symmetric homogeneous coefficient into all ordered pairs of degrees

**Definition.** Contraction splits every symmetric homogeneous coefficient into all ordered pairs of degrees.

**Construction.** Constructed by supplying each component: application, functorial action zero, functorial action sum and naturality. The accompanying laws are verified from the definitions.

**Lean 4 source** `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
noncomputable def symmetricContraction (A : Nat) :
  Hom (symmetricFormalPowerSeries A)
    (symmetricFormalTensorSquare A) where
  app := fun _ x p q =>
    Superoperator.comp
      (Superoperator.ofEquivalence (tensorSplitEquiv A p q))
      (x (p + q)).val
  map_zero := by
    intro n
    funext p q
    exact Superoperator.comp_zero_right _
  map_sum := by
    intro ? _ n f x h p q
    exact SigmaMon.ChoiSum.comp_left
      (Superoperator.ofEquivalence (tensorSplitEquiv A p q))
      (h (p + q))
  naturality := by
    intro m n x f
    funext p q
    exact Superoperator.comp_assoc _ _ _
```

#### 4.4.816 Braiding of the coefficientwise tensor square, implemented by the genuine block permutation of tensor factors

**Definition.** Braiding of the coefficientwise tensor square, implemented by the genuine block permutation of tensor factors.

**Construction.** Constructed by supplying each component: application, functorial action zero, functorial action sum and naturality. The accompanying laws are verified from the definitions.

**Lean 4 source** `QLambda/Domain/Presheaf/ExponentialCore.lean`

```
noncomputable def symmetricTensorBraiding (A : Nat) :
  Hom (symmetricFormalTensorSquare A)
    (symmetricFormalTensorSquare A) where
  app := fun _ x p q =>
    Superoperator.comp
      (Superoperator.ofEquivalence (homogeneousBraidingEquiv A q p))
      (x q p)
  map_zero := by
    intro n
    funext p q
    exact Superoperator.comp_zero_right _
  map_sum := by
    intro ? _ n f x h p q
    exact SigmaMon.ChoiSum.comp_left
      (Superoperator.ofEquivalence (homogeneousBraidingEquiv A q p))
```

```

    (h q p)
  naturality := by
    intro m n x f
    funext p q
    exact Superoperator.comp_assoc _ _ _

```

#### 4.4.817 Contraction is cocommutative with respect to the homogeneous tensor-factor braiding

**Statement.** Contraction is cocommutative with respect to the homogeneous tensor-factor braiding. Formally:  $\text{Hom.comp } (\text{symmetricTensorBraiding } A) (\text{symmetricContraction } A) = \text{symmetricContraction } A$ .

**Proof.** Both sides are compared pointwise (by extensionality). The claim follows from a chain of equalities (or inequalities). The key step rewrites with the map induced by an index equivalence of a composite for superoperators, the fact that composition for superoperators is associative and congruence of function application.

#### Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```

theorem symmetricContraction_cocommutative (A : Nat) :
  Hom.comp (symmetricTensorBraiding A) (symmetricContraction A) =
    symmetricContraction A := by
  ext n x
  funext p q
  change
    Superoperator.comp
      (Superoperator.ofEquivalence (homogeneousBraidingEquiv A q p))
      (Superoperator.comp
        (Superoperator.ofEquivalence (tensorSplitEquiv A q p))
        (x (q + p)).val) =
    Superoperator.comp
      (Superoperator.ofEquivalence (tensorSplitEquiv A p q))
      (x (p + q)).val
  calc
    _ = Superoperator.comp
      (Superoperator.ofEquivalence
        (oppositeTensorSplitEquiv A q p))
      (x (q + p)).val :=
      SymmetricElement.split_braiding (x (q + p))
    _ = _ := by
      let h : q + p = p + q := Nat.add_comm q p
      change
        Superoperator.comp
          (Superoperator.ofEquivalence
            ((finCongr
              (congrArg (tensorPowerDimension A) h)).trans
                (tensorSplitEquiv A p q)))
          (x (q + p)).val =
      _
  rw [ <- Superoperator.ofEquivalence_comp,
    <- Superoperator.comp_assoc ]
  apply congrArg (fun z =>
    Superoperator.comp
      (Superoperator.ofEquivalence (tensorSplitEquiv A p q)) z)

```

```

calc
  Superoperator.comp
    (Superoperator.ofEquivalence
      (finCongr (congrArg (tensorPowerDimension A) h)))
    (x (q + p)).val =
  (h |> x (q + p)).val :=
  SymmetricElement.val_degreeCast h (x (q + p))
_ = (x (p + q)).val :=
  congrArg SymmetricElement.val
    (SymmetricElement.family_degreeCast x h)

```

#### 4.4.818 Promotion induced by a basis equivalence preserves contraction

**Statement.** Promotion induced by a basis equivalence preserves contraction.

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the fact that composition for superoperators is associative, the map induced by an index equivalence of a composite for superoperators and the fact that naturality of the tensor product split equivalence.

**Lean 4 source** [QLambda/Domain/Presheaf/ExponentialCore.lean](#)

```

theorem symmetricContraction_promotion {A B : Nat}
  (e : Fin A → Fin B) :
  Hom.comp (symmetricContraction B)
    (symmetricEquivalencePromotion e) =
  Hom.comp (symmetricTensorSquareEquivalenceMap e)
    (symmetricContraction A) := by
  ext n x
  funext p q
  change
    Superoperator.comp
      (Superoperator.ofEquivalence (tensorSplitEquiv B p q))
      (Superoperator.comp
        (Superoperator.ofEquivalence
          (tensorTupleMapEquiv e (p + q)))
        (x (p + q)).val) =
    Superoperator.comp
      (Superoperator.ofEquivalence (homogeneousPairMapEquiv e p q))
      (Superoperator.comp
        (Superoperator.ofEquivalence (tensorSplitEquiv A p q))
        (x (p + q)).val)
  rw [Superoperator.comp_assoc, Superoperator.ofEquivalence_comp]
  rw [Superoperator.comp_assoc, Superoperator.ofEquivalence_comp]
  congr 2
  exact (tensorSplitEquiv_natural e p q).symm

```

#### 4.4.819 Weakening extracts the invariant degree-zero coefficient

**Definition.** Weakening extracts the invariant degree-zero coefficient.

**Construction.** Constructed by supplying each component: application, functorial action zero, functorial action sum and naturality. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/Presheaf/ExponentialCore.lean](#)

```

noncomputable def symmetricWeakening (A : Nat) :
  Hom (symmetricFormalPowerSeries A) (representable 1) where
  app := fun _ x => (x 0).val
  map_zero := fun _ => rfl
  map_sum := fun h => h 0
  naturality := fun _ _ => rfl

```

#### 4.4.820 Promotion induced by a basis equivalence preserves weakening

**Statement.** Promotion induced by a basis equivalence preserves weakening. Formally:  $\text{Hom.comp}(\text{symmetricWeakening } B) (\text{symmetricEquivalencePromotion } e) = \text{symmetricWeakening } A$ .

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the reflexivity of the map induced by an index equivalence, the extensionality for bilinear maps, standard identities for finite indices and the identity of a composite for superoperators.

#### Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```

theorem symmetricWeakening_promotion {A B : Nat}
  (e : Fin A → Fin B) :
  Hom.comp (symmetricWeakening B)
    (symmetricEquivalencePromotion e) =
    symmetricWeakening A := by
  ext n x
  change
  Superoperator.comp
    (Superoperator.ofEquivalence (tensorTupleMapEquiv e 0))
    (x 0).val =
    (x 0).val
  have he :
    tensorTupleMapEquiv e 0 = Equiv.refl (Fin 1) := by
  apply Equiv.ext
  intro i
  exact (Fin.eq_zero _).trans (Fin.eq_zero _).symm
  rw [he]
  change
  Superoperator.comp
    (Superoperator.ofEquivalence (Equiv.refl (Fin 1)))
    (x 0).val =
    (x 0).val
  rw [Superoperator.ofEquivalence_refl]
  exact Superoperator.identity_comp (x 0).val

```

#### 4.4.821 Dereliction extracts the invariant degree-one coefficient

**Definition.** Dereliction extracts the invariant degree-one coefficient.

**Construction.** Constructed by supplying each component: application, functorial action zero, functorial action sum and naturality. The accompanying laws are verified from the definitions.

#### Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```

noncomputable def symmetricDereliction (A : Nat) :
  Hom (symmetricFormalPowerSeries A) (representable A) where
  app := fun _ x =>
    Superoperator.comp
      (Superoperator.ofEquivalence
        (finCongr (tensorPowerDimension_one A))) (x 1).val
  map_zero := fun _ => Superoperator.comp_zero_right _
  map_sum := fun h =>
    SigmaMon.ChoiSum.comp_left
      (Superoperator.ofEquivalence
        (finCongr (tensorPowerDimension_one A))) (h 1)
  naturality := fun _ _ => Superoperator.comp_assoc _ _ _

```

#### 4.4.822 Dereliction after promotion is exactly the induced linear basis map

**Statement.** Dereliction after promotion is exactly the induced linear basis map.

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the fact that composition for superoperators is associative and the map induced by an index equivalence of a composite for superoperators.

#### Lean 4 source `QLambda/Domain/Presheaf/ExponentialCore.lean`

```

theorem symmetricDereliction_promotion {A B : Nat}
  (e : Fin A ? Fin B) :
  Hom.comp (symmetricDereliction B)
    (symmetricEquivalencePromotion e) =
  Hom.comp
    (yonedaMap
      (Superoperator.ofEquivalence (symmetricPromotionLinearPart e)))
    (symmetricDereliction A) := by
  ext n x
  change
    Superoperator.comp
      (Superoperator.ofEquivalence
        (finCongr (tensorPowerDimension_one B)))
      (Superoperator.comp
        (Superoperator.ofEquivalence (tensorTupleMapEquiv e 1))
        (x 1).val) =
    Superoperator.comp
      (Superoperator.ofEquivalence (symmetricPromotionLinearPart e))
      (Superoperator.comp
        (Superoperator.ofEquivalence
          (finCongr (tensorPowerDimension_one A)))
        (x 1).val)
  rw [Superoperator.comp_assoc, Superoperator.ofEquivalence_comp]
  rw [Superoperator.comp_assoc, Superoperator.ofEquivalence_comp]
  congr 2

```

#### 4.4.823 A carrier equipped with a relational partial countable sum

**Definition.** A carrier equipped with a relational partial countable sum.

**Construction.** An element consists of `Carrier`, zero and summation.

#### Lean 4 source `QLambda/Domain/Presheaf/Fiber.lean`

```
structure Fiber where
  Carrier : Type u
  zero : Carrier
  summation : @SigmaMon.PartialCountableSum Carrier <zero>
```

#### 4.4.824 The relation saying that a family has the indicated partial sum in a fiber

**Definition.** The relation saying that a family has the indicated partial sum in a fiber.

**Construction.** Defined to be the summability of  $f$  and  $x$ .

#### Lean 4 source `QLambda/Domain/Presheaf/FiberInstances.lean`

```
abbrev Fiber.HasSum (X : Fiber) {? : Type} [Countable ?]
  (f : ? -> X.Carrier) (x : X.Carrier) : Prop :=
  X.summation.HasSum f x
```

#### 4.4.825 The constantly-zero family has a sum over every countable index type

**Statement.** The constantly-zero family has a sum over every countable index type. Formally:  $X.HasSum \text{fun } _ \Rightarrow 0$ .

**Proof.** Both sides are compared pointwise (by extensionality). The goal is closed by simplification with the defining equations.

#### Lean 4 source `QLambda/Domain/Presheaf/FiberInstances.lean`

```
theorem Fiber.hasSum_zero (X : Fiber.{u}) {? : Type} [Countable ?] :
  X.HasSum (fun _ : ? => 0) 0 := by
  have hEmpty :
    X.HasSum (fun i : ({ } : Set ?) => 0) 0 := by
    convert ((X.summation.reindex (Equiv.Set.empty ?)
      (fun i : Empty => nomatch i) 0).mpr
      X.summation.empty) using 1
  funext i
  exact i.property.elim
exact (X.summation.remove_zero
  (fun _ : ? => 0) { } 0 (by simp)).mp hEmpty
```

#### 4.4.826 Congruence property of the summability

**Statement.** If for every  $i$ ,  $f\ i = g\ i$ , then the family  $f$  sums to  $x$  if and only if the family  $g$  sums to  $x$ .

**Proof.** Both sides are compared pointwise (by extensionality). An equation between variables is used to substitute one for the other.

#### Lean 4 source `QLambda/Domain/Presheaf/FiberInstances.lean`

```
theorem Fiber.hasSum_congr (X : Fiber.{u}) {? : Type} [Countable ?]
  {f g : ? -> X.Carrier} {x : X.Carrier}
  (h : forall i, f i = g i) :
  X.HasSum f x <-> X.HasSum g x := by
```



```

have hfg : f = g := funext h
subst g
rfl

```

#### 4.4.827 Binary (Bool-split) sums: any two carriers admit a joint sum

**Definition.** Binary (Bool-split) sums: any two carriers admit a joint sum. Together with `empty / singleton / flatten` this yields `hasSum_fin / hasSum_fintype`.

**Construction.** Defined to be  $\forall a\ b, \exists c, X.\text{HasSum } \text{fun } i \text{ } c$ .

**Lean 4 source** `QLambda/Domain/Presheaf/FiberInstances.lean`

```

def Fiber.HasSumAdd (X : Fiber.{u}) : Prop :=
  forall (a b : X.Carrier),
    exists c, X.HasSum (fun i : Bool => bif i then a else b) c

```

#### 4.4.828 Summability of the finite index of zero for fibers

**Statement.** For an index  $f$ : the family  $f$  sums to 0. Formally: `X.HasSum f 0`.

**Proof.** It follows from the congruence property of the summability.

**Lean 4 source** `QLambda/Domain/Presheaf/FiberInstances.lean`

```

theorem Fiber.hasSum_fin_zero (X : Fiber.{u}) (f : Fin 0 -> X.Carrier) :
  X.HasSum f 0 := by
  have h :=
    (X.summation.reindex (Equiv.equivEmpty (Fin 0))
      (fun i : Empty => nomatch i) 0).mpr X.summation.empty
  refine (Fiber.hasSum_congr X ?_).mpr h
  intro i; exact (isEmptyElim i : False).elim

```

#### 4.4.829 Summability of the finite index of one for fibers

**Statement.** For an index  $f$ : the family  $f$  sums to  $f\ 0$ . Formally: `X.HasSum f (f 0)`.

**Proof.** It follows from the congruence property of the summability and congruence of function application.

**Lean 4 source** `QLambda/Domain/Presheaf/FiberInstances.lean`

```

theorem Fiber.hasSum_fin_one (X : Fiber.{u}) (f : Fin 1 -> X.Carrier) :
  X.HasSum f (f 0) := by
  have h :=
    (X.summation.reindex (Equiv.ofUnique (Fin 1) PUnit)
      (fun _ : PUnit => f 0) (f 0)).mpr (X.summation.singleton (f 0))
  refine (Fiber.hasSum_congr X ?_).mpr h
  intro i; exact congrArg f (Subsingleton.elim _ _)

```

#### 4.4.830 Glue a summable $\alpha$ -family with a value at none via Bool-add + flatten

**Statement.** Glue a summable  $\alpha$ -family with a value at none via Bool-add + flatten. Formally:  $\exists s, X. \text{HasSum } g \ s$ .

**Proof.** By case analysis on  $b$ . For true and false, the claim is checked directly. It follows from the hypothesis that the family  $\text{fun } a \text{ sums to } s\alpha$ .

#### Lean 4 source `QLambda/Domain/Presheaf/FiberInstances.lean`

```
theorem Fiber.hasSum_option_of_add (X : Fiber.{u}) (hadd : Fiber.HasSumAdd X)
  {a : Type} [Countable a]
  {g : Option a → X.Carrier} {sa : X.Carrier}
  (ha : X.HasSum (fun a : a => g (some a)) sa) :
  exists s, X.HasSum g s := by
  obtain <s, hs> := hadd sa (g none)
  let ? : Bool → Type := fun b => match b with | true => a | false => PUnit
  have : forall b : Bool, Countable (? b) := fun b => by cases b <;> infer_instance
  let row : (b : Bool) → ? b → X.Carrier := fun b j =>
    match b, j with
    | true, a => g (some a)
    | false, _ => g none
  have hrows (b : Bool) : X.HasSum (row b) (bif b then sa else g none) := by
    cases b with
    | true => exact ha
    | false => exact X.summation.singleton (g none)
  have hflat :
    X.HasSum (fun p : (b : Bool) × ? b => row p.1 p.2) s :=
    (X.summation.flatten row s).mpr
  <fun b => bif b then sa else g none, hrows, hs>
  let e : ((b : Bool) × ? b) → Option a :=
    { toFun := fun | <true, a> => some a | <false, _> => none
      invFun := fun | some a => <true, a> | none => <false, <>>
      left_inv := fun | <true, _> => rfl | <false, <>> => rfl
      right_inv := fun | some _ => rfl | none => rfl }
  have hge : (fun p : (b : Bool) × ? b => g (e p)) =
    (fun p => row p.1 p.2) := by
    funext p; rcases p with <b, j>; cases b <;> rfl
  have hrow : X.HasSum (fun p => g (e p)) s := hge |> hflat
  exact <s, (X.summation.reindex e g s).mp hrow>
```

#### 4.4.831 Finite $\text{Fin } n$ families admit sums under Bool-add (induction + flatten)

**Statement.** Finite  $\text{Fin } n$  families admit sums under Bool-add (induction + flatten). Formally:  $\exists s, X. \text{HasSum } f \ s$ .

**Proof.** By induction on the natural number  $n$ . For zero, the claim is checked directly; for a successor, the claim follows from the induction hypothesis. The goal is simplified using the congruence property of the summability.

#### Lean 4 source `QLambda/Domain/Presheaf/FiberInstances.lean`

```
theorem Fiber.hasSum_fin (X : Fiber.{u}) (hadd : Fiber.HasSumAdd X)
  (n : Nat) (f : Fin n → X.Carrier) : exists s, X.HasSum f s := by
  induction n with
```

```

| zero => exact <0, Fiber.hasSum_fin_zero X f>
| succ n ih =>
  let e : Fin (n + 1) ? Option (Fin n) := finSuccEquivLast
  obtain <s_n, hs_n> := ih (fun i => f (e.symm (some i)))
  obtain <s, hs> :=
    Fiber.hasSum_option_of_add X hadd (g := fun o => f (e.symm o)) hs_n
  refine <s, ?_>
  have h := (X.summation.reindex e (fun o => f (e.symm o)) s).mpr hs
  refine (Fiber.hasSum_congr X ?_).mpr h
intro i; simp

```

#### 4.4.832 Fintype-indexed families admit sums under Bool-add

**Statement.** Fintype-indexed families admit sums under Bool-add. Formally:  $\exists s, X.\text{HasSum } f \ s$ .

**Proof.** Each component of the claim is established separately. The hypotheses are unpacked into their constituent data. The goal is simplified using the congruence property of the summability.

##### Lean 4 source `QLambda/Domain/Presheaf/FiberInstances.lean`

```

theorem Fiber.hasSum_fintype (X : Fiber.{u}) (hadd : Fiber.HasSumAdd X)
  {? : Type} [Fintype ?] (f : ? -> X.Carrier) : exists s, X.HasSum f s := by
  classical
  let e : ? ? Fin (Fintype.card ?) := Fintype.equivFin ?
  obtain <s, hs> := Fiber.hasSum_fin X hadd _ (fun i => f (e.symm i))
  refine <s, ?_>
  have h := (X.summation.reindex e (fun i => f (e.symm i)) s).mpr hs
  refine (Fiber.hasSum_congr X ?_).mpr h
intro i; simp

```

#### 4.4.833 Finset-indexed families admit sums under Bool-add

**Statement.** Finset-indexed families admit sums under Bool-add. Formally:  $\exists s, X.\text{HasSum } \text{fun } i \mapsto s$ .

**Proof.** This is an instance of the fintype-indexed families admit sums under Bool-add, applied to the hypothesis that `Fiber.HasSumAdd X`.

##### Lean 4 source `QLambda/Domain/Presheaf/FiberInstances.lean`

```

theorem Fiber.hasSum_finset (X : Fiber.{u}) (hadd : Fiber.HasSumAdd X)
  {? : Type} [DecidableEq ?] (f : ? -> X.Carrier) (t : Finset ?) :
  exists s, X.HasSum (fun i : t => f (i : ?)) s :=
  Fiber.hasSum_fintype X hadd _

```

#### 4.4.834 Joint action at an arbitrary fiber dimension

**Definition.** Joint action at an arbitrary fiber dimension. Holds for ambient CP modules; fails for TNI representables when  $d \geq 2$ .

**Construction.** A type belongs to the class when it supplies the listed operations and laws.

##### Lean 4 source `QLambda/Domain/Presheaf/HasActSumFromDim.lean`

```

class HasActSumFromDim (M : Module.{u}) : Prop where
  act_sum_from_dim :
    forall {? : Type} [Countable ?] {m d : Nat}
      {x : ? -> (M.obj d).Carrier} {s : (M.obj d).Carrier}
      (f : ? -> Superoperator m d),
      (M.obj d).HasSum x s ->
        exists z : (M.obj m).Carrier,
          (M.obj m).HasSum (fun i => M.act (x i) (f i)) z

```

#### 4.4.835 The ambient module $\text{CPM}(-, A)$ of unrestricted completely positive maps

**Definition.** The ambient module  $\text{CPM}(-, A)$  of unrestricted completely positive maps. It is distinct from the representable  $\mathcal{Q}(-, A)$ , whose elements are TNI.

**Construction.** Constructed by supplying each component: zero, summation, act, act zero element, act zero functorial action, act identity, act composite and act sum element, among others. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/Presheaf/HasActSumFromDim.lean](#)

```

noncomputable def cpmModule (A : Nat) : Module where
  obj n :=
    { Carrier := CPMMap n A
      zero := 0
      summation := SigmaMon.cpmMapPartialCountableSum }
  act := fun x f => CPMMap.comp x f.cp
  act_zero_element := by
    intro m n f
    exact CPMMap.comp_zero_left f.cp
  act_zero_map := by
    intro m n x
    exact CPMMap.comp_zero_right x
  act_id := by
    intro n x
    change CPMMap.comp x (Superoperator.identity n).cp = x
    rw [show (Superoperator.identity n).cp = CPMMap.identity n from rfl]
    exact CPMMap.comp_identity x
  act_comp := by
    intro ? m n x f g
    simp using (CPMMap.comp_assoc x f.cp g.cp).symm
  act_sum_element := by
    intro ? _ m n x s f h
    exact SigmaMon.CPMMapSum.comp_right f.cp h
  act_sum_map := by
    intro ? _ m n x f s h
    exact SigmaMon.CPMMapSum.comp_left x h
  act_sum_from_one := by
    intro ? _ m x s f h
    obtain <?, h?> := SigmaMon.CPMMapSum.comp_from_one f h
    exact <?, h?>
  act_sum_tensor_from_one := by
    intro ? _ m B x s f h
    have hmat :
      Summable fun k : ? =>
        (CPMMap.comp (x k)

```

```

      (Superoperator.tensor (f k)
        (Superoperator.identity B)).cp).choi := by
refine Pi.summable.mpr fun ai => Pi.summable.mpr fun bj => ?_
rcases ai with <a, i>; rcases bj with <b, j>
have ha :
  Summable fun k : ? =>
    ? u : Fin (1 * B), ? v : Fin (1 * B),
    ?(x k).choi (a, u) (b, v)? * ((m * B : Nat) : ?) := by
  apply summable_sum
  intro u _
  apply summable_sum
  intro v _
  exact
    (((Pi.hasSum.mp (Pi.hasSum.mp h (a, u)) (b, v))).summable.norm).mul_right
      ((m * B : Nat) : ?))
refine Summable.of_norm_bounded ha fun k => ?_
simp only [CMap.choi_comp_apply]
refine (norm_sum_le _ _).trans ?_
apply Finset.sum_le_sum
intro u _
refine (norm_sum_le _ _).trans ?_
apply Finset.sum_le_sum
intro v _
rw [norm_mul]
have hb :=
  SigmaMon.ChoiSum.entry_norm_le_trace_re
    (Superoperator.tensor (f k)
      (Superoperator.identity B)).cp.choi_pos
      (u, i) (v, j)
have htr :=
  SigmaMon.ChoiSum.trace_choi_re_le_input_dim
    (Superoperator.tensor (f k) (Superoperator.identity B))
exact mul_le_mul_of_nonneg_left (hb.trans htr) (norm_nonneg _)
exact
  <<' k,
    (CMap.comp (x k)
      (Superoperator.tensor (f k)
        (Superoperator.identity B)).cp).choi,
    SigmaMon.ChoiSum.hasSum_posSemidef hmat.hasSum fun k =>
      (CMap.comp (x k)
        (Superoperator.tensor (f k)
          (Superoperator.identity B)).cp).choi_pos>,
    hmat.hasSum>

```

#### 4.4.836 CP-map module of the obj

**Statement.** For natural numbers  $A, n$ :  $((\text{cpmModule } A).obj \ n).Carrier$  equals the completely positive map of  $n$  and  $A$ .

**Proof.** By definition. Unfolding the carrier turns the left-hand side,  $((\text{cpmModule } A).obj \ n).Carrier$ , into the right-hand side, the completely positive map of  $n$  and  $A$ ; the two sides are the same term.

**Lean 4 source** [QLambda/Domain/Presheaf/HasActSumFromDim.lean](#)

```
theorem cpmModule_obj (A n : Nat) :
```

```
((cpmModule A).obj n).Carrier = CMap n A :=
rfl
```

#### 4.4.837 CP-map module of the act

**Statement.** For natural numbers  $A, m, n$ , a completely positive map  $x$ , a superoperator  $f$ :  $(\text{cpmModule } A).act \ x \ f$  equals the composite of  $x$  after the underlying completely positive map of  $f$ .

**Proof.** By definition: the left-hand side,  $(\text{cpmModule } A).act \ x \ f$ , and the right-hand side, the composite of  $x$  after the underlying completely positive map of  $f$ , unfold to the same term.

**Lean 4 source** [QLambda/Domain/Presheaf/HasActSumFromDim.lean](#)

```
theorem cpmModule_act {A m n : Nat}
  (x : CMap n A) (f : Superoperator m n) :
  (cpmModule A).act x f = CMap.comp x f.cp :=
rfl
```

#### 4.4.838 CPM fibers admit Bool-split sums (unrestricted CP addition)

**Statement.** CPM fibers admit Bool-split sums (unrestricted CP addition). Formally:  $\text{Fiber.HasSumAdd } ((\text{cpmModule } A).obj \ n)$ .

**Proof.** Each component of the claim is established separately.

**Lean 4 source** [QLambda/Domain/Presheaf/HasActSumFromDim.lean](#)

```
theorem Fiber.HasSumAdd.cpmModule (A n : Nat) :
  Fiber.HasSumAdd ((cpmModule A).obj n) := by
  intro a b
  change CMap n A at a b
  exact <a + b, SigmaMon.CMapSum.hasSum_add a b>
```

#### 4.4.839 Dimension-indexed action sum on CP-map modules

**Definition.** Equip  $\text{cpmModule } A$  with its canonical dimension-indexed action sum.

**Construction.** The operations are given by: act sum from dimension. Each required law follows from the corresponding property of the underlying data.

**Lean 4 source** [QLambda/Domain/Presheaf/HasActSumFromDim\\_cpmModule.lean](#)

```
instance HasActSumFromDim.cpmModule (A : Nat) :
  HasActSumFromDim (cpmModule A) where
  act_sum_from_dim := by
    intro ? _ m d x s f h
    obtain <?, h?> := SigmaMon.CMapSum.comp_from_dim f h
    exact <?, h?>
```

#### 4.4.840 Dimension-indexed action sum on zero modules

**Definition.** Equip `zeroModule` with its canonical dimension-indexed action sum.

**Construction.** The operations are given by: act sum from dimension. Each required law follows from the corresponding property of the underlying data.

**Lean 4 source** `QLambda/Domain/Presheaf/HasActSumFromDim_zeroModule.lean`

```
instance HasActSumFromDim.zeroModule : HasActSumFromDim zeroModule where
  act_sum_from_dim := by
    intros
    exact <0, trivial>
```

#### 4.4.841 A sum-preserving natural transformation of specialized modules

**Definition.** A sum-preserving natural transformation of specialized modules.

**Construction.** An element consists of `app`, `map_sum` and `naturality`, subject to the laws `map_zero`.

**Lean 4 source** `QLambda/Domain/Presheaf/Hom.lean`

```
structure Hom (M : Module.{u}) (N : Module.{v}) where
  app : forall n, (M.obj n).Carrier -> (N.obj n).Carrier
  map_zero : forall n, app n 0 = 0
  map_sum :
    forall {? : Type} [Countable ?] {n} {f : ? -> (M.obj n).Carrier}
      {x : (M.obj n).Carrier},
      (M.obj n).HasSum f x ->
        (N.obj n).HasSum (fun i => app n (f i)) (app n x)
  naturality :
    forall {m n} (x : (M.obj n).Carrier) (f : Superoperator m n),
      app m (M.act x f) = N.act (app n x) f
```

#### 4.4.842 Extensionality for module morphisms

**Statement.** For superoperator modules  $M, N$ , module morphisms  $f, g$ : if for every  $n, x$ ,  $f.app\ n\ x = g.app\ n\ x$ , then  $f = g$ .

**Proof.** By case analysis on the module morphism  $f$ . It follows from the hypothesis that for every  $n, x$ ,  $f.app\ n\ x = g.app\ n\ x$ .

**Lean 4 source** `QLambda/Domain/Presheaf/Hom.lean`

```
theorem ext {M : Module.{u}} {N : Module.{v}} {f g : Hom M N}
  (h : forall n x, f.app n x = g.app n x) : f = g := by
  cases f
  cases g
  congr
  funext n x
  exact h n x
```

#### 4.4.843 Definition of the module morphism of the identity

**Definition.** The identity of  $M$  is a module morphism from  $M$  to  $M$ .

**Construction.** Constructed by supplying each component: application, functorial action zero, functorial action sum and naturality. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/Presheaf/Hom.lean](#)

```
def id (M : Module.{u}) : Hom M M where
  app := fun _ x => x
  map_zero := fun _ => rfl
  map_sum := fun h => h
  naturality := fun _ _ => rfl
```

#### 4.4.844 Definition of the composition of module morphisms

**Definition.** The composition of  $g$  and  $f$  is a module morphism from  $L$  to  $N$ .

**Construction.** Constructed by supplying each component: application, functorial action zero, functorial action sum and naturality. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/Presheaf/Hom.lean](#)

```
def comp {L : Module.{u}} {M : Module.{v}} {N : Module.{w}}
  (g : Hom M N) (f : Hom L M) : Hom L N where
  app := fun n x => g.app n (f.app n x)
  map_zero := by
    intro n
    rw [f.map_zero, g.map_zero]
  map_sum := fun h => g.map_sum (f.map_sum h)
  naturality := by
    intro m n x h
    rw [f.naturality, g.naturality]
```

#### 4.4.845 Components of the identity

**Statement.** For a superoperator module  $M$ , a natural number  $n$ :  $(\text{id } M).app \ n \ x = x$ .

**Proof.** By definition: the left-hand side,  $(\text{id } M).app \ n \ x$ , and the right-hand side,  $x$ , unfold to the same term.

**Lean 4 source** [QLambda/Domain/Presheaf/Hom.lean](#)

```
theorem id_app (M : Module.{u}) (n : Nat) (x : (M.obj n).Carrier) :
  (id M).app n x = x :=
  rfl
```

#### 4.4.846 Components of the composition

**Statement.** For superoperator modules  $L, M, N$ , module morphisms  $g, f$ , a natural number  $n$ :  $(\text{comp } g \ f).app \ n \ x$  equals the application of  $n$  and the application of  $n$  and  $x$ .



**Proof.** By definition: the left-hand side,  $(\text{comp } g \ f) . \text{app } n \ x$ , and the right-hand side, the application of  $n$  and the application of  $n$  and  $x$ , unfold to the same term.

#### Lean 4 source `QLambda/Domain/Presheaf/Hom.lean`

```
theorem comp_app {L : Module.{u}} {M : Module.{v}} {N : Module.{w}}
  (g : Hom M N) (f : Hom L M)
  (n : Nat) (x : (L.obj n).Carrier) :
  (comp g f).app n x = g.app n (f.app n x) :=
  rfl
```

#### 4.4.847 The identity is a left unit for composition for module morphisms

**Statement.** For superoperator modules  $M, N$ , a module morphism  $f$ : the composite of the identity of  $N$  after  $f$  equals  $f$ .

**Proof.** Both sides are compared pointwise (by extensionality).

#### Lean 4 source `QLambda/Domain/Presheaf/Hom.lean`

```
theorem id_comp {M : Module.{u}} {N : Module.{v}} (f : Hom M N) :
  comp (id N) f = f := by
  ext
  rfl
```

#### 4.4.848 The identity is a right unit for composition for module morphisms

**Statement.** For superoperator modules  $M, N$ , a module morphism  $f$ : the composite of  $f$  after the identity of  $M$  equals  $f$ .

**Proof.** Both sides are compared pointwise (by extensionality).

#### Lean 4 source `QLambda/Domain/Presheaf/Hom.lean`

```
theorem comp_id {M : Module.{u}} {N : Module.{v}} (f : Hom M N) :
  comp f (id M) = f := by
  ext
  rfl
```

#### 4.4.849 Composition for module morphisms is associative

**Statement.** For superoperator modules  $K, L, M, N$ , module morphisms  $g, f$ : if  $\text{Hom } M \ N$ , then the composite of  $h$  after the composite of  $g$  after  $f$  equals the composite of the composite of  $h$  after  $g$  after  $f$ .

**Proof.** Both sides are compared pointwise (by extensionality).

#### Lean 4 source `QLambda/Domain/Presheaf/Hom.lean`

```
theorem comp_assoc {K : Module.{u}} {L : Module.{v}}
  {M : Module.{w}} {N : Module.{x}}
  (h : Hom M N) (g : Hom L M) (f : Hom K L) :
  comp h (comp g f) = comp (comp h g) f := by
  ext
  rfl
```

#### 4.4.850 The zero natural transformation

**Definition.** The zero natural transformation.

**Construction.** Constructed by supplying each component: application, functorial action zero, functorial action sum and naturality. The accompanying laws are verified from the definitions.

##### Lean 4 source `QLambda/Domain/Presheaf/Hom.lean`

```
def zero (M : Module.{u}) (N : Module.{v}) : Hom M N where
  app := fun n _ => 0
  map_zero := fun _ => rfl
  map_sum := by
    intro ? _ n f x h
    have hz :
      (N.obj n).HasSum (fun _ : ({} : Set ?) => 0) 0 := by
        convert ((N.obj n).summation.reindex (Equiv.Set.empty ?)
          (fun i : Empty => nomatch i) 0).mpr
          (N.obj n).summation.empty using 1
    funext i
    exact i.property.elim
  exact (N.obj n).summation.remove_zero
    (fun _ : ? => (0 : (N.obj n).Carrier)) {} 0
    (by simp) |>.mp hz
  naturality := by
    intro m n x f
    exact (N.act_zero_element f).symm
```

#### 4.4.851 Pointwise partial sums of natural transformations

**Definition.** Pointwise partial sums of natural transformations. Naturality belongs to the proposed result  $s$ , so no choice of a pointwise sum is hidden here.

**Construction.** Defined to be  $\forall n x, (N.obj n).HasSum (fun i => (f i).app n x) (s.app n x)$ .

##### Lean 4 source `QLambda/Domain/Presheaf/Hom.lean`

```
def HasSum {M : Module.{u}} {N : Module.{v}} {? : Type} [Countable ?]
  (f : ? -> Hom M N) (s : Hom M N) : Prop :=
  forall n x, (N.obj n).HasSum (fun i => (f i).app n x) (s.app n x)
```

#### 4.4.852 Uniqueness of the summability

**Statement.** For superoperator modules  $M, N$ , module morphisms  $s, t$ : if the family  $f$  sums to  $s$  and the family  $f$  sums to  $t$ , then  $s = t$ .

**Proof.** Both sides are compared pointwise (by extensionality).

##### Lean 4 source `QLambda/Domain/Presheaf/Hom.lean`

```
theorem hasSum_unique {M : Module.{u}} {N : Module.{v}}
  {? : Type} [Countable ?] {f : ? -> Hom M N} {s t : Hom M N}
  (hs : HasSum f s) (ht : HasSum f t) : s = t := by
  ext n x
  exact (N.obj n).summation.unique (hs n x) (ht n x)
```

#### 4.4.853 Summability of a singleton for module morphisms

**Statement.** For superoperator modules  $M, N$ , a module morphism  $f$ : the family  $\text{fun } \_ \text{ sums to } f$ .

**Proof.** The claim follows directly from the definitions of the objects involved.

**Lean 4 source** `QLambda/Domain/Presheaf/Hom.lean`

```
theorem hasSum_singleton {M : Module.{u}} {N : Module.{v}} (f : Hom M N) :
  HasSum (fun _ : PUnit => f) f := by
  intro n x
  exact (N.obj n).summation.singleton _
```

#### 4.4.854 Summability of the reindexing for module morphisms

**Statement.** For superoperator modules  $M, N$ , a module morphism  $s$ : the family  $f \circ e$  sums to  $s$  if and only if the family  $f$  sums to  $s$ .

**Proof.** Each component of the claim is established separately.

**Lean 4 source** `QLambda/Domain/Presheaf/Hom.lean`

```
theorem hasSum_reindex {M : Module.{u}} {N : Module.{v}}
  {α : Type} [Countable α] [Countable α]
  (e : α → α) (f : α → Hom M N) (s : Hom M N) :
  HasSum (f ∘ e) s <-> HasSum f s := by
  constructor <=> intro h n x
  * exact ((N.obj n).summation.reindex e
    (fun i => (f i).app n x) (s.app n x)).mp (h n x)
  * exact ((N.obj n).summation.reindex e
    (fun i => (f i).app n x) (s.app n x)).mpr (h n x)
```

#### 4.4.855 Postcomposition preserves every defined pointwise sum of module maps

**Statement.** Postcomposition preserves every defined pointwise sum of module maps. Formally:  $\text{HasSum } (\text{fun } i \Rightarrow \text{comp } g \text{ (f } i)) \text{ (comp } g \text{ s)}$ .

**Proof.** The claim follows directly from the definitions of the objects involved.

**Lean 4 source** `QLambda/Domain/Presheaf/Hom.lean`

```
theorem hasSum_comp_left {L : Module.{u}} {M : Module.{v}}
  {N : Module.{w}} {α : Type} [Countable α]
  (g : Hom M N) {f : α → Hom L M} {s : Hom L M}
  (h : HasSum f s) :
  HasSum (fun i => comp g (f i)) (comp g s) := by
  intro n x
  exact g.map_sum (h n x)
```

#### 4.4.856 Precomposition preserves every defined pointwise sum of module maps

**Statement.** Precomposition preserves every defined pointwise sum of module maps. Formally:  $\text{HasSum } (\text{fun } i \Rightarrow \text{comp (f } i) \text{ g}) \text{ (comp s g)}$ .

**Proof.** It follows from the hypothesis that the family  $f$  sums to  $s$ .

#### Lean 4 source `QLambda/Domain/Presheaf/Hom.lean`

```
theorem hasSum_comp_right {L : Module.{u}} {M : Module.{v}}
  {N : Module.{w}} {? : Type} [Countable ?]
  {f : ? -> Hom M N} {s : Hom M N} (g : Hom L M)
  (h : HasSum f s) :
  HasSum (fun i => comp (f i) g) (comp s g) := by
  intro n x
  exact h n (g.app n x)
```

#### 4.4.857 Components of the zero

**Statement.** For superoperator modules  $M, N$ , a natural number  $n$ :  $0.\text{app } n \ x = 0$ .

**Proof.** By definition: the left-hand side,  $0.\text{app } n \ x$ , and the right-hand side,  $0$ , unfold to the same term.

#### Lean 4 source `QLambda/Domain/Presheaf/HomInstances.lean`

```
theorem zero_app (M : Module.{u}) (N : Module.{v})
  (n : Nat) (x : (M.obj n).Carrier) :
  (0 : Hom M N).app n x = 0 :=
  rfl
```

#### 4.4.858 Summability of the empty family for module morphisms

**Statement.** For superoperator modules  $M, N$ : the family  $\text{fun } i$  sums to  $0$ .

**Proof.** The claim follows directly from the definitions of the objects involved.

#### Lean 4 source `QLambda/Domain/Presheaf/HomInstances.lean`

```
theorem hasSum_empty (M : Module.{u}) (N : Module.{v}) :
  HasSum (fun i : Empty => nomatch i) (0 : Hom M N) := by
  intro n x
  convert (N.obj n).summation.empty using 1
  change (zero M N).app n x = 0
  rfl
```

#### 4.4.859 Summability of the remove of zero for module morphisms

**Statement.** For superoperator modules  $M, N$ , a module morphism  $g$ : if if for every  $i, i \notin s$ , then  $f \ i = 0$ , then the family  $\text{fun } i$  sums to  $g$  if and only if the family  $f$  sums to  $g$ .

**Proof.** Each component of the claim is established separately. The key step rewrites with the hypothesis that if for every  $i, i \notin s$ , then  $f \ i = 0$ .

#### Lean 4 source `QLambda/Domain/Presheaf/HomInstances.lean`

```
theorem hasSum_remove_zero {M : Module.{u}} {N : Module.{v}}
  {? : Type} [Countable ?] (f : ? -> Hom M N) (s : Set ?)
  (g : Hom M N) (hzero : forall i, i notin s -> f i = 0) :
```

```

    HasSum (fun i : s => f i) g <-> HasSum f g := by
constructor <;> intro h n x
* apply ((N.obj n).summation.remove_zero
  (fun i => (f i).app n x) s (g.app n x) ?_).mp
* exact h n x
* intro i hi
  rw [hzero i hi]
  rfl
* apply ((N.obj n).summation.remove_zero
  (fun i => (f i).app n x) s (g.app n x) ?_).mpr
* exact h n x
* intro i hi
  rw [hzero i hi]
  rfl

```

#### 4.4.860 Concrete right adjoint to tensoring by a representable: $[Y(A), N](n) = N(n * A)$

**Definition.** Concrete right adjoint to tensoring by a representable:  $[Y(A), N](n) = N(n * A)$ .

**Construction.** Constructed by supplying each component: act, act zero element, act zero functorial action, act identity, act composite, act sum element, act sum functorial action and act sum from one, among others. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/Presheaf/InternalHomRepresentable.lean](#)

```

noncomputable def internalHomRepresentable (A : Nat) (N : Module.{u}) :
  Module.{u} where
obj n := N.obj (n * A)
act := fun x f =>
  N.act x (Superoperator.tensor f (Superoperator.identity A))
act_zero_element := by
  intro m n f
  exact N.act_zero_element _
act_zero_map := by
  intro m n x
  rw [Superoperator.tensor_zero_left]
  exact N.act_zero_map x
act_id := by
  intro n x
  rw [Superoperator.tensor_identity]
  exact N.act_id x
act_comp := by
  intro ? m n x f g
  rw [N.act_comp, <- Superoperator.tensor_comp,
    Superoperator.comp_identity]
act_sum_element := by
  intro ? _ m n x s f h
  exact N.act_sum_element _ h
act_sum_map := by
  intro ? _ m n x f s h
  exact N.act_sum_map x
    (SigmaMon.ChoiSum.tensor_hasSum_left h
    (Superoperator.identity A))
act_sum_from_one := by
  intro ? _ m x s f h

```

```

exact N.act_sum_tensor_from_one f h
act_sum_tensor_from_one := by
  intro ? _ m B x s f h
  -- Reassociate `(f ? id_B) ? id_A` via the tensor associator, then apply
  -- `N.act_sum_tensor_from_one` at ancillary dimension `B * A`.
  let a_1 : Superoperator (1 * (B * A)) ((1 * B) * A) :=
    Superoperator.tensorAssociatorInv 1 B A
  let a_2 : Superoperator ((m * B) * A) (m * (B * A)) :=
    Superoperator.tensorAssociator m B A
  let x' : ? -> (N.obj (1 * (B * A))).Carrier :=
    fun i => N.act (x i) a_1
  let s' : (N.obj (1 * (B * A))).Carrier := N.act s a_1
  have hs' : (N.obj (1 * (B * A))).HasSum x' s' :=
    N.act_sum_element a_1 h
  obtain <z', hz'> := N.act_sum_tensor_from_one (A := B * A) f hs'
  refine <N.act z' a_2, ?_>
  have hten (g : Superoperator m 1) :
    Superoperator.tensor
      (Superoperator.tensor g (Superoperator.identity B))
      (Superoperator.identity A) =
    Superoperator.comp a_1
      (Superoperator.comp
        (Superoperator.tensor g (Superoperator.identity (B * A)))
        a_2) := by
  have hnata :=
    Superoperator.tensorAssociator_naturality g
      (Superoperator.identity B) (Superoperator.identity A)
  -- `a_2' comp ((g ? id_B) ? id_A) = (g ? (id_B ? id_A)) comp a_2`
  -- with `a_2' = tensorAssociator 1 B A`.
  have h :=
    congrArg (Superoperator.comp
      (Superoperator.tensorAssociatorInv 1 B A)) hnata
  simpa [Superoperator.comp_assoc,
    Superoperator.tensorAssociator_inv_hom,
    Superoperator.identity_comp, Superoperator.tensor_identity,
    a_1, a_2] using h
  have hfam :
    (fun i =>
      N.act (x i)
        (Superoperator.tensor
          (Superoperator.tensor (f i) (Superoperator.identity B))
          (Superoperator.identity A))) =
    fun i =>
      N.act
        (N.act (x' i)
          (Superoperator.tensor (f i)
            (Superoperator.identity (B * A))))
        a_2 := by
  funext i
  -- `act x (a_1 comp (f?id) comp a_2) = act (act (act x a_1) (f?id)) a_2`
  rw [hten, <- N.act_comp, <- N.act_comp]
  have hza :
    (N.obj ((m * B) * A)).HasSum
      (fun i =>
        N.act
          (N.act (x' i)
            (Superoperator.tensor (f i)
              (Superoperator.identity (B * A))))
          a_2) := by

```

```

      (Superoperator.tensor (f i)
        (Superoperator.identity (B * A))))
    a_2)
  (N.act z' a_2) :=
  N.act_sum_element a_2 hz'
rw [hfam]
exact hza

```

#### 4.4.861 Closed adjunction on representable left arguments

**Definition.** Closed adjunction on representable left arguments.

**Construction.** Defined by an explicit formula built from the Yoneda equivalence and the internal morphism representable.

**Lean 4 source** [QLambda/Domain/Presheaf/InternalHomRepresentable.lean](#)

```

noncomputable def closedRepresentableEquiv
  (X A : Nat) (N : Module.{u}) :
  Hom (dayTensorRepresentable X A) N ?
  Hom (representable X) (internalHomRepresentable A N) :=
(yonedaEquiv N (X * A)).trans
(yonedaEquiv (internalHomRepresentable A N) X).symm

```

#### 4.4.862 Currying is evaluation of the two Yoneda correspondences

**Definition.** Currying is evaluation of the two Yoneda correspondences.

**Construction.** Defined to be `closedRepresentableEquiv X A N f`.

**Lean 4 source** [QLambda/Domain/Presheaf/InternalHomRepresentable.lean](#)

```

noncomputable def curryRepresentable {X A : Nat} {N : Module.{u}}
  (f : Hom (dayTensorRepresentable X A) N) :
  Hom (representable X) (internalHomRepresentable A N) :=
closedRepresentableEquiv X A N f

```

#### 4.4.863 Uncurrying is the inverse closed correspondence

**Definition.** Uncurrying is the inverse closed correspondence.

**Construction.** Defined to be `(closedRepresentableEquiv X A N).symm f`.

**Lean 4 source** [QLambda/Domain/Presheaf/InternalHomRepresentable.lean](#)

```

noncomputable def uncurryRepresentable {X A : Nat} {N : Module.{u}}
  (f : Hom (representable X) (internalHomRepresentable A N)) :
  Hom (dayTensorRepresentable X A) N :=
(closedRepresentableEquiv X A N).symm f

```

#### 4.4.864 Representability of the currying of the uncurrying

**Statement.** For natural numbers  $X$ ,  $A$ , a superoperator module  $N$ , a module morphism  $f$ : the currying representable of the uncurrying representable of  $f$  equals  $f$ .

**Proof.** The proof term combines the facts named in it directly.

**Lean 4 source** `QLambda/Domain/Presheaf/InternalHomRepresentable.lean`

```
theorem curry_uncurry_representable {X A : Nat} {N : Module.{u}}
  (f : Hom (representable X) (internalHomRepresentable A N)) :
  curryRepresentable (uncurryRepresentable f) = f :=
  (closedRepresentableEquiv X A N).apply_symm_apply f
```

#### 4.4.865 Representability of the uncurrying of the currying

**Statement.** For natural numbers  $X$ ,  $A$ , a superoperator module  $N$ , a module morphism  $f$ : the uncurrying representable of the currying representable of  $f$  equals  $f$ .

**Proof.** The proof term combines the facts named in it directly.

**Lean 4 source** `QLambda/Domain/Presheaf/InternalHomRepresentable.lean`

```
theorem uncurry_curry_representable {X A : Nat} {N : Module.{u}}
  (f : Hom (dayTensorRepresentable X A) N) :
  uncurryRepresentable (curryRepresentable f) = f :=
  (closedRepresentableEquiv X A N).symm_apply_apply f
```

#### 4.4.866 Linear side of the prospective presheaf LNL model

**Definition.** Linear side of the prospective presheaf LNL model: Day-biorthogonal classical objects enriched over pointed  $\omega$ CPOs in Choi order.

**Construction.** Defined to be the biorthogonal  $\omega$  category.

**Lean 4 source** `QLambda/Domain/Presheaf/LNL.lean`

```
noncomputable abbrev presheafLinear :
  QLambda.Domain.OmegaCategory :=
  biorthogonalOmegaCategory
```

#### 4.4.867 Nonlinear side sketch: the same biorthogonal $\omega$ CPO category

**Definition.** Nonlinear side sketch: the same biorthogonal  $\omega$ CPO category. A finished LNL model may refine this to a Cartesian-closed full subcategory of based/classical objects; that packaging is not yet kernel-proved, so we do not fabricate a different category or a `CartesianClosed` instance.

**Construction.** Defined to be the biorthogonal  $\omega$  category.

**Lean 4 source** `QLambda/Domain/Presheaf/LNL.lean`

```
noncomputable abbrev presheafNonlinear :
  QLambda.Domain.OmegaCategory :=
  biorthogonalOmegaCategory
```



#### 4.4.868 Terminal / tensor-unit classical object available on both sides

**Definition.** Terminal / tensor-unit classical object available on both sides.

**Construction.** Defined to be the unit classical object.

**Lean 4 source** [QLambda/Domain/Presheaf/LNL.lean](#)

```
noncomputable abbrev presheafUnitObject : BiorthogonalObject :=
  unitClassicalObject
```

#### 4.4.869 Representable classical object $y(A)$ for $A > 0$

**Definition.** Representable classical object  $y(A)$  for  $A > 0$ .

**Construction.** Defined to be the representable classical object of  $A$  and  $hA$ .

**Lean 4 source** [QLambda/Domain/Presheaf/LNL.lean](#)

```
noncomputable abbrev presheafRepresentable (A : Nat) (hA : 0 < A) :
  BiorthogonalObject :=
  representableClassicalObject A hA
```

#### 4.4.870 Bang comonoid on dimension $A \leq 1$ (linear exponential carrier)

**Definition.** Bang comonoid on dimension  $A \leq 1$  (linear exponential carrier).

**Construction.** Defined to be the exponential comonoid of  $A$  and  $hA$ .

**Lean 4 source** [QLambda/Domain/Presheaf/LNL.lean](#)

```
noncomputable abbrev presheafBangComonoid (A : Nat) (hA : A <= 1) : Comonoid :=
  bangComonoid A hA
```

#### 4.4.871 Co-Kleisli promotion for $A, B \leq 1$ (from the cofree UP)

**Definition.** Co-Kleisli promotion for  $A, B \leq 1$  (from the cofree UP).

**Construction.** Defined to be `@bangPromote A B hA hB`.

**Lean 4 source** [QLambda/Domain/Presheaf/LNL.lean](#)

```
noncomputable abbrev presheafBangPromote {A B : Nat} (hA : A <= 1) (hB : B <= 1)
  :=
  @bangPromote A B hA hB
```

#### 4.4.872 Functorial bang on maps of representables $(A, B \leq 1)$

**Definition.** Functorial bang on maps of representables  $(A, B \leq 1)$ .

**Construction.** Defined to be `@bangMap A B hA hB`.

**Lean 4 source** [QLambda/Domain/Presheaf/LNL.lean](#)

```
noncomputable abbrev presheafBangMap {A B : Nat} (hA : A <= 1) (hB : B <= 1) :=
  @bangMap A B hA hB
```

#### 4.4.873 A specialized right module over finite-dimensional trace-nonincreasing superoperators

**Definition.** A specialized right module over finite-dimensional trace-nonincreasing superoperators. The two sum laws are exactly enriched functoriality in the element and superoperator arguments.

**Construction.** An element consists of `obj`, `act`, `act_comp`, `act_sum_element`, `act_sum_map`, `act_sum_from_one` and `act_sum_tensor_from_one`, subject to the laws `act_zero_element`, `act_zero_map` and `act_id`.

**Lean 4 source** [QLambda/Domain/Presheaf/Module.lean](#)

```
structure Module where
  obj : Nat -> Fiber.{u}
  act : {m n : Nat} -> (obj n).Carrier -> Superoperator m n -> (obj m).Carrier
  act_zero_element :
    forall {m n} (f : Superoperator m n), act (0 : (obj n).Carrier) f = 0
  act_zero_map :
    forall {m n} (x : (obj n).Carrier), act x (0 : Superoperator m n) = 0
  act_id :
    forall {n} (x : (obj n).Carrier), act x (Superoperator.identity n) = x
  act_comp :
    forall {? m n} (x : (obj n).Carrier)
      (f : Superoperator m n) (g : Superoperator ? m),
    act (act x f) g = act x (Superoperator.comp f g)
  act_sum_element :
    forall {? : Type} [Countable ?] {m n} {x : ? -> (obj n).Carrier}
      {s : (obj n).Carrier} (f : Superoperator m n),
    (obj n).HasSum x s ->
      (obj m).HasSum (fun i => act (x i) f) (act s f)
  act_sum_map :
    forall {? : Type} [Countable ?] {m n} (x : (obj n).Carrier)
      {f : ? -> Superoperator m n} {s : Superoperator m n},
    SigmaMon.ChoiSum.HasSum f s ->
      (obj m).HasSum (fun i => act x (f i)) (act x s)
  /-- Joint action of a summable family at the unit fiber against an
  arbitrary family of maps into the unit fiber. -/
  act_sum_from_one :
    forall {? : Type} [Countable ?] {m} {x : ? -> (obj 1).Carrier}
      {s : (obj 1).Carrier} (f : ? -> Superoperator m 1),
    (obj 1).HasSum x s ->
      exists z : (obj m).Carrier,
        (obj m).HasSum (fun i => act (x i) (f i)) z
  /-- Joint action of a summable family at fiber `1 * A` against maps
  `f i ? id_A`. -/
  act_sum_tensor_from_one :
    forall {? : Type} [Countable ?] {m A} {x : ? -> (obj (1 * A)).Carrier}
      {s : (obj (1 * A)).Carrier} (f : ? -> Superoperator m 1),
    (obj (1 * A)).HasSum x s ->
      exists z : (obj (m * A)).Carrier,
        (obj (m * A)).HasSum
          (fun i =>
            act (x i)
```

```

      (Superoperator.tensor (f i) (Superoperator.identity A)))
    z
/- NOTE (Gate 3 / Path 2): a proposed field
...
act_sum_from_dim :
  forall {α} [Countable α] {m d} {x : α → (obj d).Carrier} {s}
    (f : α → Superoperator m d),
    (obj d).HasSum x s →
      exists z, (obj m).HasSum (fun i => act (x i) (f i)) z
...

is **false** for TNI/representable modules when `d >= 2`; see
`SigmaMon.ChoiSum.exists_fiber2_comp_without_superoperator_sum`
(`e0`/`e1`/`p0`/`p1`, `not_exists_hasSum_gate3Composed`).
It holds for unrestricted CP via `CPMapSum.comp_from_dim` /
`HasActSumFromDim`. Do not reintroduce it as a required `Module` field. -/

```

#### 4.4.874 Postcomposition by a fixed superoperator preserves every defined Choi sum

**Statement.** Postcomposition by a fixed superoperator preserves every defined Choi sum. Formally:  $\text{HasSum } (\text{fun } i \Rightarrow \text{Superoperator.comp } \Psi \text{ (f } i)) \text{ (Superoperator.comp } \Psi \Phi)$ .

**Proof.** The key step rewrites with the coordinate formula for intrinsic Choi composition.

#### Lean 4 source `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```

theorem comp_left {α : Type} [Countable α]
  (f : Superoperator m α) {g : α → Superoperator n m}
  {h : Superoperator n m} (h : HasSum f h) :
  HasSum (fun i => Superoperator.comp ? (f i))
    (Superoperator.comp ? h) := by
  change _root_.HasSum
    (fun k => (CPMap.comp ? .cp (f k).cp).choi)
    (CPMap.comp ? .cp h.cp).choi
  apply Pi.hasSum.mpr
  rintro <a, i>
  apply Pi.hasSum.mpr
  rintro <b, j>
  simp_rw [CPMap.choi_comp_apply]
  apply hasSum_sum
  intro x _
  apply hasSum_sum
  intro y _
  exact
    ((Pi.hasSum.mp (Pi.hasSum.mp h (x, i)) (y, j)).mul_left
      (? .cp.choi (a, x) (b, y)))

```

#### 4.4.875 Precomposition by a fixed superoperator preserves every defined Choi sum

**Statement.** Precomposition by a fixed superoperator preserves every defined Choi sum. Formally:  $\text{HasSum } (\text{fun } i \Rightarrow \text{Superoperator.comp } (f \text{ } i) \Phi) \text{ (Superoperator.comp } \Psi \Phi)$ .

**Proof.** The key step rewrites with the coordinate formula for intrinsic Choi composition.

#### Lean 4 source `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```
theorem comp_right {α : Type} [Countable α]
  {f : α → Superoperator m} {g : Superoperator m →}
  {h : Superoperator n →} (h : HasSum f) :
  HasSum (fun i => Superoperator.comp (f i) g)
    (Superoperator.comp ? g) := by
change _root_.HasSum
  (fun k => (CMap.comp (f k).cp ? cp).choi
    (CMap.comp ? cp ? cp).choi
  apply Pi.hasSum.mpr
  rintro <a, i>
  apply Pi.hasSum.mpr
  rintro <b, j>
  simp_rw [CMap.choi_comp_apply]
  apply hasSum_sum
  intro x _
  apply hasSum_sum
  intro y _
  exact
    ((Pi.hasSum.mp (Pi.hasSum.mp h (a, x)) (b, y)).mul_right
      (? cp.choi (x, i) (y, j)))
```

#### 4.4.876 Effect of composing a map out of the unit fiber with a map into it

**Statement.** Effect of composing a map out of the unit fiber with a map into it. Formally:  $(\text{CMap.comp } f \text{ } g).\text{effect} = (f.\text{effect } 0 \ 0) \cdot g.\text{effect}$ .

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the coordinate formula for intrinsic Choi composition, the definition of the effect, distributivity of multiplication over finite sums and standard identities for finite types.

#### Lean 4 source `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```
theorem effect_comp_from_one (f : CMap 1) (g : CMap m 1) :
  (CMap.comp f g).effect = (f.effect 0 0) * g.effect := by
ext i j
change
  (? a : Fin ?, (CMap.comp f g).choi (a, j) (a, i)) =
    (f.effect 0 0) * g.effect i j
simp only [CMap.choi_comp_apply, CMap.effect]
have hfactor :
  (? a : Fin ?, f.choi (a, 0) (a, 0) * g.choi (0, j) (0, i)) =
    (? a : Fin ?, f.choi (a, 0) (a, 0)) * g.choi (0, j) (0, i) := by
  rw [← Finset.sum_mul]
  simp [Fintype.sum_unique] using hfactor
```

#### 4.4.877 The trace of the Choi matrix of the real part is bounded by input of the dimension

**Statement.** Trace bound:  $\text{Trace}(\text{choi}).\text{re} \leq \text{input dimension}$  for TNI maps. Formally:  $(\text{tr } \Phi.\text{cp.choi}).\text{re} \leq n$ .

**Proof.** The key step rewrites with standard identities for matrices, standard identities for finite types and interchange of finite sums.

#### Lean 4 source `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```
theorem trace_choi_re_le_input_dim {n m : Nat} (? : Superoperator n m) :
  (Matrix.trace ?.cp.choi).re <= n := by
  have he :=
    CPMMap.effect_le_one_of_trace_nonincreasing ?.cp ?.trace_nonincreasing
  have hp : (1 - ?.cp.effect).PosSemidef := Matrix.le_iff.mp he
  have ht := hp.trace_nonneg
  rw [Matrix.trace_sub, Matrix.trace_one] at ht
  have htre := (RCLike.nonneg_iff.mp ht).1
  have hte :
    Matrix.trace ?.cp.choi = Matrix.trace ?.cp.effect := by
  change (? p : Fin m x Fin n, ?.cp.choi p p) =
    ? i : Fin n, ? a : Fin m, ?.cp.choi (a, i) (a, i)
  rw [Fintype.sum_prod_type, Finset.sum_comm]
  rw [hte]
  simpa using htre
```

#### 4.4.878 Choi $\rightarrow$ effect as a continuous linear map

**Definition.** Choi  $\rightarrow$  effect as a continuous linear map.

**Construction.** Defined by an explicit formula built from the passage to continuous linear functorial action, the passage to fun, the introduction and the extensionality.

#### Lean 4 source `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```
noncomputable def effectCLM (n m : Nat) :
  Matrix (Fin m x Fin n) (Fin m x Fin n) ? -> L[?]
  Matrix (Fin n) (Fin n) ? :=
  LinearMap.toContinuousLinearMap
  { toFun := fun A i j => ? a : Fin m, A (a, j) (a, i)
    map_add' := by
      intro A B; ext i j
      exact Finset.sum_add_distrib
    map_smul' := by
      intro c A; ext i j
      change (? a : Fin m, c * A (a, j) (a, i)) = c * ? a : Fin m, A (a, j) (a, i)
      rw [ <- Finset.mul_sum ] }
```

#### 4.4.879 Joint precomposition against maps into the unit fiber

**Statement.** Joint precomposition against maps into the unit fiber. Formally:  $\exists X : \text{Superoperator } m \ell, \text{HasSum } (\text{fun } i \Rightarrow \text{Superoperator.comp } (f \ i) \ (g \ i)) \ X$ .

**Proof.** By case analysis on  $a_i$ . The key step rewrites with the coordinate formula for intrinsic Choi composition, standard identities for finite indices, the usual algebraic identities and the fact that intrinsic trace non-increase is exactly the input-effect bound.

#### Lean 4 source `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```
theorem comp_from_one {? : Type} [Countable ?] {m ? : Nat}
  {f : ? -> Superoperator 1 ?} {g : Superoperator 1 ?}
  (g : ? -> Superoperator m 1) (hf : HasSum f ?) :
```

```

exists ? : Superoperator m ?,
  HasSum (fun i => Superoperator.comp (f i) (g i)) ? := by
classical
have hfin (k : ?) (a b : Fin ?) (i j : Fin m) :
  (CPMap.comp (f k).cp (g k).cp).choi (a, i) (b, j) =
    (f k).cp.choi (a, 0) (b, 0) *
      (g k).cp.choi (0, i) (0, j) := by
  simp [CPMap.choi_comp_apply, Fin.default_eq_zero]
have hentries (a b : Fin ?) (i j : Fin m) :
  Summable fun k : ? =>
    (CPMap.comp (f k).cp (g k).cp).choi (a, i) (b, j) := by
  simp_rw [hfin]
have ha :
  Summable fun k : ? => (f k).cp.choi (a, 0) (b, 0) :=
  (Pi.hasSum.mp
    (Pi.hasSum.mp hf (a, (0 : Fin 1)))
    (b, (0 : Fin 1))).summable
have haN : Summable fun k : ? =>
  ?(f k).cp.choi (a, 0) (b, 0)? * (m : ?) :=
  (ha.norm.mul_right (m : ?))
refine Summable.of_norm_bounded haN fun k => ?_
rw [norm_mul]
have hb :=
  entry_norm_le_trace_re (g k).cp.choi_pos (0, i) (0, j)
have htr := trace_choi_re_le_input_dim (g k)
exact
  (mul_le_mul_of_nonneg_left (hb.trans htr) (norm_nonneg _)).trans_eq
  (by ring)
have hmat :
  Summable fun k : ? =>
    (CPMap.comp (f k).cp (g k).cp).choi := by
  refine Pi.summable.mpr fun ai => Pi.summable.mpr fun bj => ?_
  rcases ai with <a, i>; rcases bj with <b, j>
  exact hentries a b i j
let ?cp : CPMap m ? :=
  { choi := ?' k : ?, (CPMap.comp (f k).cp (g k).cp).choi
    choi_pos :=
      hasSum_posSemidef hmat.hasSum fun k =>
        (CPMap.comp (f k).cp (g k).cp).choi_pos }
have hcp :
  _root_.HasSum
    (fun i => (CPMap.comp (f i).cp (g i).cp).choi) ?cp.choi :=
  hmat.hasSum
refine <<?cp, ?_>, hcp>
-- TNI via `effect <= 1`.
rw [traceNonincreasing_iff_effect_le_one]
have heffect_term (k : ?) :
  (CPMap.comp (f k).cp (g k).cp).effect =
    ((f k).cp.effect 0 0) * (g k).cp.effect :=
  effect_comp_from_one (f k).cp (g k).cp
have heff_sum :
  _root_.HasSum
    (fun k => (CPMap.comp (f k).cp (g k).cp).effect) ?cp.effect :=
  hcp.map (effectCLM m ?) (effectCLM m ?).cont
have heff_sum' :
  _root_.HasSum

```

```

      (fun k => ((f k).cp.effect 0 0) * (g k).cp.effect) ?cp.effect :=
      heff_sum.congr_fun fun k => (heffect_term k).symm
have ha_re (k : ?) : 0 <= ((f k).cp.effect 0 0).re :=
  diag_re_nonneg (f k).cp.effect_posSemidef 0
have ha_im (k : ?) : ((f k).cp.effect 0 0).im = 0 :=
  diag_im_eq_zero (f k).cp.effect_posSemidef 0
have ha_nn (k : ?) : 0 <= (f k).cp.effect 0 0 :=
  RCLike.nonneg_iff.mpr <ha_re k, ha_im k>
have ha_sum :
  _root_.HasSum (fun k => (f k).cp.effect 0 0) (?cp.effect 0 0) := by
  have hE :
    _root_.HasSum (fun k => (f k).cp.effect) ?cp.effect :=
    hf.map (effectCLM 1 ?) (effectCLM 1 ?).cont
    exact Pi.hasSum.mp (Pi.hasSum.mp hE 0) 0
have ha_le : (?cp.effect 0 0).re <= 1 := by
  have h?e :=
    CPMMap.effect_le_one_of_trace_nonincreasing ?cp
    ?.trace_nonincreasing
  have hpsd : (1 - ?cp.effect).PosSemidef := Matrix.le_iff.mp h?e
  have hre := diag_re_nonneg hpsd (0 : Fin 1)
  change 0 <= (1 - ?cp.effect 0 0).re at hre
  rw [Complex.sub_re, Complex.one_re] at hre
  linarith
-- Entrywise: `? a_k * I = (? a_k) * I`.
have hI_sum :
  _root_.HasSum
    (fun k =>
      ((f k).cp.effect 0 0) * (1 : Matrix (Fin m) (Fin m) ?))
      ((?cp.effect 0 0) * (1 : Matrix (Fin m) (Fin m) ?)) := by
  apply Pi.hasSum.mpr
  intro i
  apply Pi.hasSum.mpr
  intro j
  simp only [Matrix.smul_apply, Matrix.one_apply]
  by_cases hij : i = j
  * subst hij
    simp using ha_sum
  * simp [hij]
-- Difference family `a_k * (I - E_k)` sums to `(? a)*I - ?cp.effect`.
have hdiff :
  _root_.HasSum
    (fun k =>
      ((f k).cp.effect 0 0) *
      ((1 : Matrix (Fin m) (Fin m) ?) - (g k).cp.effect))
      ((?cp.effect 0 0) * (1 : Matrix (Fin m) (Fin m) ?) -
      ?cp.effect) := by
  have hsub := hI_sum.sub heff_sum'
  refine hsub.congr_fun fun k => ?_
  simp [smul_sub]
have hpsd_term (k : ?) :
  (((f k).cp.effect 0 0) *
    ((1 : Matrix (Fin m) (Fin m) ?) -
    (g k).cp.effect)).PosSemidef := by
  have hg :=
    CPMMap.effect_le_one_of_trace_nonincreasing (g k).cp
    (g k).trace_nonincreasing

```

```

    exact (Matrix.le_iff.mp hg).smul (ha_nn k)
have hsum_le :
  ?cp.effect <=
    (?cp.effect 0 0) * (1 : Matrix (Fin m) (Fin m) ?) :=
    Matrix.le_iff.mpr (hasSum_posSemidef hdiff hpsd_term)
have hscale :
  (?cp.effect 0 0) * (1 : Matrix (Fin m) (Fin m) ?) <=
    (1 : Matrix (Fin m) (Fin m) ?) := by
have hal : ?cp.effect 0 0 <= (1 : ?) := by
  rw [ <- sub_nonneg ]
  refine RCLike.nonneg_iff.mpr <?_, ?_>
  * simp [Complex.sub_re, Complex.one_re] using sub_nonneg.mpr ha_le
  * simp [Complex.sub_im, diag_im_eq_zero ?cp.effect_posSemidef 0]
have : (1 : Matrix (Fin m) (Fin m) ?) -
  (?cp.effect 0 0) * 1 =
  (1 - ?cp.effect 0 0) * 1 := by
  simp [sub_smul, one_smul]
  rw [Matrix.le_iff, this]
  exact (Matrix.PosSemidef.one (n := Fin m)).smul (sub_nonneg.mpr hal)
exact hsum_le.trans hscale

/ -! ## Gate 3 / Path 2 obstruction (kernel-checked)

A proposed `ChoiSum.comp_from_dim` / `Module.act_sum_from_dim` (joint TNI
precomposition at fiber `d >= 2`) is false. The counterexample below
constructs complementary basis effects `e0, e1 : 2 -> 1` summing to discard
and isometric preparations `p0, p1 : 1 -> 2`, so that
`e_i comp p_i = id_1` and the composed Bool-family has no TNI/`Superoperator`
Choi sum (`not_exists_hasSum_gate3Composed`,
`exists_fiber2_comp_without_superoperator_sum`). Ambient CP still admits
`CPMapSum.comp_from_dim` below; do not add the false statement as a
required `Module` field. -/

```

#### 4.4.880 Computational-basis bra $\langle i |$ as a Kraus operator $2 \rightarrow 1$

**Definition.** Computational-basis bra  $\langle i |$  as a Kraus operator  $2 \rightarrow 1$ .

**Construction.** The map sending  $\_ j$  to if  $j = i$  then 1 else 0.

**Lean 4 source** [QLambda/Domain/Presheaf/ModuleChoiSum.lean](#)

```

def basisBra (i : Fin 2) : KrausOperator 2 1 :=
  fun _ j => if j = i then (1 : ?) else 0

```

#### 4.4.881 Computational-basis ket $| i \rangle$ as a Kraus operator $1 \rightarrow 2$

**Definition.** Computational-basis ket  $| i \rangle$  as a Kraus operator  $1 \rightarrow 2$ .

**Construction.** The map sending  $j \_$  to if  $j = i$  then 1 else 0.

**Lean 4 source** [QLambda/Domain/Presheaf/ModuleChoiSum.lean](#)

```

def basisKet (i : Fin 2) : KrausOperator 1 2 :=
  fun j _ => if j = i then (1 : ?) else 0

```



#### 4.4.882 Basis bra of the effect for countable Choi sums

**Statement.** For an index  $i$ : the effect of  $[\text{basisBra } i]$  equals  $\text{fun } j \ k \Rightarrow \text{if } j = i \wedge k = i \text{ then } 1 \text{ else } 0$ .

**Proof.** Both sides are compared pointwise (by extensionality). The argument splits on the relevant condition. The goal is simplified using the definition of the effect, standard identities for lists, the fact that zero is a right unit for addition for finitely supported sums and the definition of the basis bra.

**Lean 4 source** `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```
theorem basisBra_effect (i : Fin 2) :
  KrausFamily.effect [basisBra i] =
    fun j k => if j = i /\ k = i then (1 : ?) else 0 := by
  ext j k
  simp only [KrausFamily.effect, List.map_cons, List.map_nil, List.sum_cons,
    List.sum_nil, add_zero, basisBra, Matrix.mul_apply, conjTranspose_apply,
    Fintype.sum_unique]
  split_ifs <|> simp_all
```

#### 4.4.883 Basis bra of the effect of a sum

**Statement.** The sum of the effect of  $[\text{basisBra } 0]$  and the effect of  $[\text{basisBra } 1]$  equals  $1 : \text{Matrix (Fin 2) (Fin 2) } \mathbb{C}$ .

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with standard identities for matrices and the basis bra of the effect for countable Choi sums. Every finite index is checked separately.

**Lean 4 source** `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```
theorem basisBra_effect_add :
  KrausFamily.effect [basisBra 0] + KrausFamily.effect [basisBra 1] =
    (1 : Matrix (Fin 2) (Fin 2) ?) := by
  ext j k
  rw [Matrix.add_apply, basisBra_effect, basisBra_effect, Matrix.one_apply]
  fin_cases j <|> fin_cases k <|> simp
```

#### 4.4.884 The basis bra of the effect is at most one

**Statement.** For an index  $i$ :  $\text{KrausFamily.effect } [\text{basisBra } i] \leq 1$ . Formally:  $\text{KrausFamily.effect } [\text{basisBra } i] \leq 1$ .

**Proof.** The key step rewrites with the fact that addition for finitely supported sums is commutative, the characterization of the order for subnormalized density matrices, the usual algebraic identities and the positive semidefiniteness of the effect.

**Lean 4 source** `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```
theorem basisBra_effect_le_one (i : Fin 2) :
  KrausFamily.effect [basisBra i] <= 1 := by
  have hsum := basisBra_effect_add
  have hother :
    KrausFamily.effect [basisBra (1 - i)] =
```

```

      (1 : Matrix (Fin 2) (Fin 2) ?) - KrausFamily.effect [basisBra i] := by
    fin_cases i
    * exact eq_sub_of_add_eq (by simpa [add_comm] using hsum)
    * exact eq_sub_of_add_eq hsum
  rw [Matrix.le_iff, <- hother]
  exact KrausFamily.effect_posSemidef _

```

#### 4.4.885 Basis ket of the effect for countable Choi sums

**Statement.** For an index  $i$ : the effect of  $[\text{basisKet } i]$  equals  $1 : \text{Matrix } (\text{Fin } 1) (\text{Fin } 1) \mathbb{C}$ .

**Proof.** Both sides are compared pointwise (by extensionality). The claim follows from a chain of equalities (or inequalities). The argument splits on the relevant condition. The goal is simplified using the definition of the effect, standard identities for lists, the fact that zero is a right unit for addition for finitely supported sums and the definition of the basis ket.

#### Lean 4 source `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```

theorem basisKet_effect (i : Fin 2) :
  KrausFamily.effect [basisKet i] = (1 : Matrix (Fin 1) (Fin 1) ?) := by
  ext a b
  fin_cases a; fin_cases b
  simp only [KrausFamily.effect, List.map_cons, List.map_nil, List.sum_cons,
    List.sum_nil, add_zero, basisKet, Matrix.mul_apply, conjTranspose_apply,
    Matrix.one_apply]
  classical
  calc
    (? j : Fin 2, star (if j = i then (1 : ?) else 0) *
      (if j = i then (1 : ?) else 0)) =
      ? j : Fin 2, if j = i then (1 : ?) else 0 := by
    refine Finset.sum_congr rfl fun j _ => ?_
    split_ifs <=> simp
    _ = 1 := by simp

```

#### 4.4.886 Basis bra of a product of the basis ket for countable Choi sums

**Statement.** For an index  $i$ : the product of the basis bra of  $i$  and the basis ket of  $i$  equals  $1 : \text{Matrix } (\text{Fin } 1) (\text{Fin } 1) \mathbb{C}$ .

**Proof.** Both sides are compared pointwise (by extensionality). The claim follows from a chain of equalities (or inequalities). The argument splits on the relevant condition. The goal is simplified using the definition of the basis bra, the definition of the basis ket, standard identities for matrices and the sum of a congruence.

#### Lean 4 source `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```

theorem basisBra_mul_basisKet (i : Fin 2) :
  basisBra i * basisKet i = (1 : Matrix (Fin 1) (Fin 1) ?) := by
  ext a b
  fin_cases a; fin_cases b
  simp only [basisBra, basisKet, Matrix.mul_apply, Matrix.one_apply]
  classical

```

```

calc
  (? j : Fin 2, (if j = i then (1 : ?) else 0) *
    (if j = i then (1 : ?) else 0)) =
    ? j : Fin 2, if j = i then (1 : ?) else 0 := by
      refine Finset.sum_congr rfl fun j _ => ?_
      split_ifs <;> simp
      _ = 1 := by simp

```

#### 4.4.887 Basis bra of a product of the basis ket for countable Choi sums, assuming ne

**Statement.** For indexes  $i, j$ : if  $i \neq j$ , then the product of the basis bra of  $i$  and the basis ket of  $j$  equals  $0 : \text{Matrix } (\text{Fin } 1) (\text{Fin } 1) \mathbb{C}$ .

**Proof.** Both sides are compared pointwise (by extensionality). The claim follows from a chain of equalities (or inequalities). The argument splits on the relevant condition. The goal is simplified using the definition of the basis bra, the definition of the basis ket, standard identities for matrices and the sum of a congruence.

#### Lean 4 source `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```

theorem basisBra_mul_basisKet_of_ne {i j : Fin 2} (h : i != j) :
  basisBra i * basisKet j = (0 : Matrix (Fin 1) (Fin 1) ?) := by
  ext a b
  fin_cases a; fin_cases b
  simp only [basisBra, basisKet, Matrix.mul_apply, Matrix.zero_apply]
  classical
  calc
    (? k : Fin 2, (if k = i then (1 : ?) else 0) *
      (if k = j then (1 : ?) else 0)) =
      ? k : Fin 2, (0 : ?) := by
        refine Finset.sum_congr rfl fun k _ => ?_
        split_ifs with hki hkj
        * exact False.elim (h (hki.symm.trans hkj))
        * simp
        * simp
        * simp
    _ = 0 := by simp

```

#### 4.4.888 Complementary computational-basis effect $\langle i | - | i \rangle : 2 \rightarrow 1$

**Definition.** Complementary computational-basis effect  $\langle i | - | i \rangle : 2 \rightarrow 1$ .

**Construction.** Constructed by supplying each component: underlying completely positive map and trace nonincreasing. The accompanying laws are verified from the definitions.

#### Lean 4 source `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```

noncomputable def complementaryBasisEffect (i : Fin 2) : Superoperator 2 1 where
  cp := CPMMap.ofKraus [basisBra i]
  trace_nonincreasing :=
    (traceNonincreasing_iff_effect_le_one _).mpr <| by
      simpa [CPMMap.effect_ofKraus] using basisBra_effect_le_one i

```

#### 4.4.889 Isometric preparation of computational-basis state $|i\rangle$ as $1 \rightarrow 2$

**Definition.** Isometric preparation of computational-basis state  $|i\rangle$  as  $1 \rightarrow 2$ .

**Construction.** Constructed by supplying each component: underlying completely positive map and trace nonincreasing. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/Presheaf/ModuleChoiSum.lean](#)

```
noncomputable def isometricBasisPrep (i : Fin 2) : Superoperator 1 2 where
  cp := CPMMap.ofKraus [basisKet i]
  trace_nonincreasing :=
    (traceNonincreasing_iff_effect_le_one _).mpr <| by
      simp [CPMap.effect_ofKraus, basisKet_effect]
```

#### 4.4.890 Discard / partial trace $2 \rightarrow 1$ (effect $I_2$ )

**Definition.** Discard / partial trace  $2 \rightarrow 1$  (effect  $I_2$ ).

**Construction.** Constructed by supplying each component: underlying completely positive map and trace nonincreasing. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/Presheaf/ModuleChoiSum.lean](#)

```
noncomputable def discardTwo : Superoperator 2 1 where
  cp := CPMMap.ofKraus [basisBra 0, basisBra 1]
  trace_nonincreasing :=
    (traceNonincreasing_iff_effect_le_one _).mpr <| by
      rw [CPMap.effect_ofKraus]
      have heff :
        KrausFamily.effect [basisBra 0, basisBra 1] =
          KrausFamily.effect [basisBra 0] + KrausFamily.effect [basisBra 1] := by
        simp [KrausFamily.effect]
      rw [heff, basisBra_effect_add]
```

#### 4.4.891 Definition of the $e_0$ of countable Choi sums

**Definition.** The  $e_0$  is a superoperator from 2 to 1.

**Construction.** Defined to be the complementary basis effect at 0.

**Lean 4 source** [QLambda/Domain/Presheaf/ModuleChoiSum.lean](#)

```
noncomputable abbrev e0 : Superoperator 2 1 := complementaryBasisEffect 0
```

#### 4.4.892 Definition of the $e_1$ of countable Choi sums

**Definition.** The  $e_1$  is a superoperator from 2 to 1.

**Construction.** Defined to be the complementary basis effect at 1.

**Lean 4 source** [QLambda/Domain/Presheaf/ModuleChoiSum.lean](#)

```
noncomputable abbrev e1 : Superoperator 2 1 := complementaryBasisEffect 1
```

#### 4.4.893 Definition of the $p_0$ of countable Choi sums

**Definition.** The  $p_0$  is a superoperator from 1 to 2.

**Construction.** Defined to be the isometric basis preparation at 0.

**Lean 4 source** [QLambda/Domain/Presheaf/ModuleChoiSum.lean](#)

```
noncomputable abbrev p0 : Superoperator 1 2 := isometricBasisPrep 0
```

#### 4.4.894 Definition of the $p_1$ of countable Choi sums

**Definition.** The  $p_1$  is a superoperator from 1 to 2.

**Construction.** Defined to be the isometric basis preparation at 1.

**Lean 4 source** [QLambda/Domain/Presheaf/ModuleChoiSum.lean](#)

```
noncomputable abbrev p1 : Superoperator 1 2 := isometricBasisPrep 1
```

#### 4.4.895 The $e_0$ of a sum of the $e_1$ of the underlying completely positive map equals a discard two

**Statement.** The sum of the underlying completely positive map of  $e_0$  and the underlying completely positive map of  $e_1$  equals the underlying completely positive map.

**Proof.** The goal is closed by simplification with the defining equations.

**Lean 4 source** [QLambda/Domain/Presheaf/ModuleChoiSum.lean](#)

```
theorem e0_add_e1_cp_eq_discardTwo :
  e0.cp + e1.cp = discardTwo.cp := by
  change CPMMap.ofKraus [basisBra 0] + CPMMap.ofKraus [basisBra 1] =
    CPMMap.ofKraus [basisBra 0, basisBra 1]
  simpa using (CPMap.ofKraus_append [basisBra 0] [basisBra 1]).symm
```

#### 4.4.896 Complementary basis effect of a composite of the isometric basis preparation for countable Choi sums

**Statement.** For an index  $i$ : the composite of the complementary basis effect of  $i$  after the isometric basis preparation of  $i$  equals the identity on dimension 1.

**Proof.** Both sides are compared pointwise (by extensionality). The claim follows from a chain of equalities (or inequalities). The goal is simplified using the underlying completely positive map of a composite for superoperators, the definition of the complementary basis effect, the definition of the isometric basis preparation and the definition of the identity.

**Lean 4 source** [QLambda/Domain/Presheaf/ModuleChoiSum.lean](#)

```
theorem complementaryBasisEffect_comp_isometricBasisPrep (i : Fin 2) :
  Superoperator.comp (complementaryBasisEffect i) (isometricBasisPrep i) =
    Superoperator.identity 1 := by
  apply Superoperator.ext
  apply CPMMap.ext_apply
  intro ?
```

```

simp only [Superoperator.cp_comp, complementaryBasisEffect, isometricBasisPrep,
  Superoperator.identity, CPMat.applyMat_comp, CPMat.applyMat_ofKraus,
  CPMat.applyMat_identity, KrausFamily.applyMat_single]
calc
  basisBra i * (basisKet i * ? * (basisKet i)?) * (basisBra i)?
    = (basisBra i * basisKet i) * ? *
      ((basisBra i * basisKet i)?) := by
        simp [Matrix.mul_assoc]
  _ = (1 : Matrix (Fin 1) (Fin 1) ?) * ? * (1 : Matrix (Fin 1) (Fin 1) ?)? := by
    simp [basisBra_mul_basisKet]
  _ = ? := by simp

```

#### 4.4.897 Complementary basis effect of a composite of the isometric basis preparation for countable Choi sums, assuming ne

**Statement.** For indexes  $i, j$ : if  $i \neq j$ , then the composite of the complementary basis effect of  $i$  after the isometric basis preparation of  $j$  equals 0.

**Proof.** Both sides are compared pointwise (by extensionality). The claim follows from a chain of equalities (or inequalities). The goal is simplified using the underlying completely positive map of a composite for superoperators, the definition of the complementary basis effect, the definition of the isometric basis preparation and the underlying completely positive map of zero for superoperators.

**Lean 4 source** [QLambda/Domain/Presheaf/ModuleChoiSum.lean](#)

```

theorem complementaryBasisEffect_comp_isometricBasisPrep_of_ne
  {i j : Fin 2} (h : i != j) :
  Superoperator.comp (complementaryBasisEffect i) (isometricBasisPrep j) = 0 := by
  apply Superoperator.ext
  apply CPMat.ext_apply
  intro ?
  simp only [Superoperator.cp_comp, complementaryBasisEffect, isometricBasisPrep,
    Superoperator.cp_zero, CPMat.applyMat_comp, CPMat.applyMat_ofKraus,
    CPMat.applyMat_zero, KrausFamily.applyMat_single]
  calc
    basisBra i * (basisKet j * ? * (basisKet j)?) * (basisBra i)?
      = (basisBra i * basisKet j) * ? *
        ((basisBra i * basisKet j)?) := by
          -- `(basisKet j)? * (basisBra i)? = (basisBra i * basisKet j)?`
          simp [Matrix.mul_assoc, <- Matrix.conjTranspose_mul]
    _ = (0 : Matrix (Fin 1) (Fin 1) ?) * ? *
      ((0 : Matrix (Fin 1) (Fin 1) ?)?) := by
      simp [basisBra_mul_basisKet_of_ne h]
    _ = 0 := by simp

```

#### 4.4.898 E 0 of a composite of the p 0 for countable Choi sums

**Statement.** The composite of  $e_0$  after  $p_0$  equals the identity on dimension 1.

**Proof.** This is an instance of the complementary basis effect of a composite of the isometric basis preparation for countable Choi sums.

**Lean 4 source** [QLambda/Domain/Presheaf/ModuleChoiSum.lean](#)

```

theorem e0_comp_p0 :
  Superoperator.comp e0 p0 = Superoperator.identity 1 :=
  complementaryBasisEffect_comp_isometricBasisPrep 0

```

#### 4.4.899 E 1 of a composite of the p 1 for countable Choi sums

**Statement.** The composite of  $e_1$  after  $p_1$  equals the identity on dimension 1.

**Proof.** This is an instance of the complementary basis effect of a composite of the isometric basis preparation for countable Choi sums.

**Lean 4 source** [QLambda/Domain/Presheaf/ModuleChoiSum.lean](#)

```

theorem e1_comp_p1 :
  Superoperator.comp e1 p1 = Superoperator.identity 1 :=
  complementaryBasisEffect_comp_isometricBasisPrep 1

```

#### 4.4.900 The complementary basis effects are Choi-summable to discard

**Statement.** The complementary basis effects are Choi-summable to discard. Formally:  $\text{HasSum } \text{fun } i \text{ discardTwo}$ .

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the fact that the  $e_0$  of a sum of the  $e_1$  of the underlying completely positive map equals a discard two.

**Lean 4 source** [QLambda/Domain/Presheaf/ModuleChoiSum.lean](#)

```

theorem complementaryBasisEffects_hasSum_discard :
  HasSum (fun i : Bool => bif i then e0 else e1) discardTwo := by
  have hTNI : TraceNonincreasing (e0.cp + e1.cp) := by
    rw [e0_add_e1_cp_eq_discardTwo]
    exact discardTwo.trace_nonincreasing
  have hsum := hasSum_add_of_addable e0 e1 hTNI
  have heq : (<e0.cp + e1.cp, hTNI> : Superoperator 2 1) = discardTwo :=
    Superoperator.ext e0_add_e1_cp_eq_discardTwo
  rwa [heq] at hsum

```

#### 4.4.901 Joint composition of the Gate-3 complementary effects against the matching preparations: two copies of $\text{id}_1$

**Definition.** Joint composition of the Gate-3 complementary effects against the matching preparations: two copies of  $\text{id}_1$ .

**Construction.** The map sending  $i$  to the composite of  $\text{bif } i \text{ then } e_0 \text{ else } e_1$  after  $\text{bif } i \text{ then } p_0 \text{ else } p_1$ .

**Lean 4 source** [QLambda/Domain/Presheaf/ModuleChoiSum.lean](#)

```

noncomputable def gate3ComposedFamily : Bool -> Superoperator 1 1 :=
  fun i =>
    Superoperator.comp (bif i then e0 else e1) (bif i then p0 else p1)

```

#### 4.4.902 The gate 3 composed family equals the identity

**Statement.** For a bit  $i$ : the gate 3 composed family of  $i$  equals the identity on dimension 1.

**Proof.** By case analysis on the bit  $i$ . The goal is simplified using the definition of the gate 3 composed family, the  $e_0$  of a composite of the  $p_0$  for countable Choi sums and the  $e_1$  of a composite of the  $p_1$  for countable Choi sums.

**Lean 4 source** `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```
theorem gate3ComposedFamily_eq_identity (i : Bool) :
  gate3ComposedFamily i = Superoperator.identity 1 := by
  cases i <|> simp [gate3ComposedFamily, e0_comp_p0, e1_comp_p1]
```

#### 4.4.903 Identity of the effect for countable Choi sums

**Statement.** For a natural number  $n$ :  $(\text{CMap.identity } n).\text{effect} = 1$ . Formally:  $(\text{CMap.identity } n).\text{effect} = 1$ .

**Proof.** The key step rewrites with the definition of the identity, the effect of a map determined by a Kraus family and the definition of the effect.

**Lean 4 source** `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```
theorem identity_effect (n : Nat) :
  (CMap.identity n).effect = 1 := by
  rw [CMap.identity, CMap.effect_ofKraus]
  simp [KrausFamily.effect, KrausFamily.identity]
```

#### 4.4.904 Effect of a sum

**Statement.** For completely positive maps  $\Phi, \Psi$ :  $(\Phi + \Psi).\text{effect}$  equals the sum of the effect of  $\Phi$  and the effect of  $\Psi$ .

**Proof.** Both sides are compared pointwise (by extensionality). The goal is simplified using the definition of the effect, the Choi matrix of a sum for completely positive maps, standard identities for matrices and standard identities for finite sums.

**Lean 4 source** `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```
theorem effect_add (f g : CMap n m) :
  (f + g).effect = f.effect + g.effect := by
  ext i j
  simp only [CMap.effect, CMap.choi_add, Matrix.add_apply, Finset.sum_add_distrib]
```

#### 4.4.905 The CP sum of two copies of $\text{id}_1$ has effect $2 \cdot I_1$

**Statement.** The CP sum of two copies of  $\text{id}_1$  has effect  $2 \cdot I_1$ . Formally:  $(\text{CMap.identity } 1 + \text{CMap.identity } 1).\text{effect} = 2 \cdot (1 : \text{Matrix } (\text{Fin } 1) (\text{Fin } 1) \mathbb{C})$ .

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the effect of a sum, the identity of the effect for countable Choi sums, standard identities for matrices and the usual algebraic identities. The remaining numerical facts are checked by direct computation.



#### Lean 4 source `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```
theorem two_identity_effect :
  (CPMap.identity 1 + CPMAP.identity 1).effect =
    (2 : ?) * (1 : Matrix (Fin 1) (Fin 1) ?) := by
  rw [effect_add, identity_effect]
  ext i j
  fin_cases i; fin_cases j
  simp only [Matrix.add_apply, Matrix.smul_apply, Matrix.one_apply, smul_eq_mul]
  norm_num
```

#### 4.4.906 Hence $\text{id}_1 + \text{id}_1$ is not trace-nonincreasing

**Statement.** Hence  $\text{id}_1 + \text{id}_1$  is not trace-nonincreasing. Formally:  $\neg \text{TraceNonincreasing } (\text{CPMap.identity } 1 + \text{CPMap.identity } 1)$ .

**Proof.** The key step rewrites with the fact that intrinsic trace non-increase is exactly the input-effect bound, the fact that the CP sum of two copies of  $\text{id}_1$  has effect  $2 \cdot \mathbb{I}_1$ , standard identities for matrices and the usual algebraic identities. The remaining numerical facts are checked by direct computation.

#### Lean 4 source `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```
theorem two_identity_not_traceNonincreasing :
  not TraceNonincreasing (CPMap.identity 1 + CPMAP.identity 1) := by
  rw [traceNonincreasing_iff_effect_le_one, two_identity_effect]
  intro h
  have hp : ((1 : Matrix (Fin 1) (Fin 1) ?) - (2 : ?) * 1).PosSemidef :=
    Matrix.le_iff.mp h
  have hdiag := diag_re_nonneg hp (0 : Fin 1)
  simp only [Matrix.sub_apply, Matrix.smul_apply, Matrix.one_apply, smul_eq_mul,
    Complex.sub_re] at hdiag
  norm_num at hdiag
```

#### 4.4.907 The composed Gate-3 family has no Superoperator (TNI) Choi sum

**Statement.** The composed Gate-3 family has no Superoperator (TNI) Choi sum. Formally:  $\neg \exists \Phi : \text{Superoperator } 1 \ 1, \text{ HasSum gate3ComposedFamily } \Phi$ .

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the fact that the gate 3 composed family equals the identity, standard identities for finite types, the Choi matrix of a sum for completely positive maps and the fact that hence  $\text{id}_1 + \text{id}_1$  is not trace-nonincreasing.

#### Lean 4 source `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```
theorem not_exists_hasSum_gate3Composed :
  not exists ? : Superoperator 1 1, HasSum gate3ComposedFamily ? := by
  rintro <?, h?>
  have h?' :
    _root_.HasSum
      (fun _ : Bool => (CPMap.identity 1).choi) ? .cp.choi := by
  refine
    (show _root_.HasSum (fun i => (gate3ComposedFamily i).cp.choi) ? .cp.choi
      from h?).congr_fun ?_
  intro i
```

```

rw [gate3ComposedFamily_eq_identity i]
rfl
have hfin :
  _root_.HasSum
    (fun _ : Bool => (CPMap.identity 1).choi)
    (? _ : Bool, (CPMap.identity 1).choi) :=
  hasSum_fintype fun _ : Bool => (CPMap.identity 1).choi
have hchoi : ?cp.choi = ? _ : Bool, (CPMap.identity 1).choi :=
  h?'.unique hfin
have hsum :
  ? _ : Bool, (CPMap.identity 1).choi =
    (CPMap.identity 1 + CPMap.identity 1).choi := by
  simp only [Fintype.sum_bool, CPMap.choi_add]
have hcp : ?cp = CPMap.identity 1 + CPMap.identity 1 :=
  CPMap.ext (hchoi.trans hsum)
exact two_identity_not_traceNonincreasing (hcp |> ?.trace_nonincreasing)

```

#### 4.4.908 The existence fiber 2 composition without superoperator sum

**Statement.** Precise Gate-3 negation: there is a Choi-summable TNI family at fiber 2 and a TNI family into fiber 2 whose joint compositions admit no Superoperator Choi sum. Formally:  $\exists f \Psi g, \text{HasSum } f \Psi \wedge \neg \exists \Phi : \text{Superoperator } 1 \ 1, \text{HasSum } (\text{fun } i \Rightarrow \text{Superoperator.comp } (f \ i) \ (g \ i)) \ \Phi$ .

**Proof.** It follows from the fact that the composed Gate-3 family has no Superoperator (TNI) Choi sum.

#### Lean 4 source `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```

theorem exists_fiber2_comp_without_superoperator_sum :
  exists (f : Bool -> Superoperator 2 1) (? : Superoperator 2 1)
    (g : Bool -> Superoperator 1 2),
  HasSum f ? /\
    not exists ? : Superoperator 1 1,
  HasSum (fun i => Superoperator.comp (f i) (g i)) ? := by
  refine
    <fun i => bif i then e0 else e1, discardTwo,
    fun i => bif i then p0 else p1,
    complementaryBasisEffects_hasSum_discard, ?>
  exact not_exists_hasSum_gate3Composed

```

#### 4.4.909 Postcomposition by a fixed CP map preserves ambient CP sums

**Statement.** Postcomposition by a fixed CP map preserves ambient CP sums. Formally:  $\text{HasSum } (\text{fun } i \Rightarrow \text{CPMap.comp } \Psi \ (f \ i)) \ (\text{CPMap.comp } \Psi \ \Phi)$ .

**Proof.** The key step rewrites with the coordinate formula for intrinsic Choi composition.

#### Lean 4 source `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```

theorem comp_left {? : Type} [Countable ?]
  (? : CPMap m ?) {f : ? -> CPMap n m}
  {? : CPMap n m} (h : HasSum f ?) :
  HasSum (fun i => CPMap.comp ? (f i)) (CPMap.comp ? ?) := by
  change _root_.HasSum

```

```

    (fun k => (CPMap.comp ? (f k)).choi) (CPMap.comp ? ?).choi
  apply Pi.hasSum.mpr
  rintro <a, i>
  apply Pi.hasSum.mpr
  rintro <b, j>
  simp_rw [CPMap.choi_comp_apply]
  apply hasSum_sum
  intro x _
  apply hasSum_sum
  intro y _
  exact
    ((Pi.hasSum.mp (Pi.hasSum.mp h (x, i)) (y, j)).mul_left
     (? .choi (a, x) (b, y)))

```

#### 4.4.910 Precomposition by a fixed CP map preserves ambient CP sums

**Statement.** Precomposition by a fixed CP map preserves ambient CP sums. Formally:  $\text{HasSum } (\text{fun } i \Rightarrow \text{CPMap.comp } (f \ i) \ \Phi) \ (\text{CPMap.comp } \Psi \ \Phi)$ .

**Proof.** The key step rewrites with the coordinate formula for intrinsic Choi composition.

**Lean 4 source** [QLambda/Domain/Presheaf/ModuleChoiSum.lean](#)

```

theorem comp_right {? : Type} [Countable ?]
  {f : ? -> CPMap m ?} {? : CPMap m ?}
  (? : CPMap n m) (h : HasSum f ?) :
  HasSum (fun i => CPMap.comp (f i) ?) (CPMap.comp ? ?) := by
  change _root_.HasSum
  (fun k => (CPMap.comp (f k) ?).choi) (CPMap.comp ? ?).choi
  apply Pi.hasSum.mpr
  rintro <a, i>
  apply Pi.hasSum.mpr
  rintro <b, j>
  simp_rw [CPMap.choi_comp_apply]
  apply hasSum_sum
  intro x _
  apply hasSum_sum
  intro y _
  exact
    ((Pi.hasSum.mp (Pi.hasSum.mp h (a, x)) (b, y)).mul_right
     (? .choi (x, i) (y, j)))

```

#### 4.4.911 Joint precomposition of ambient CP maps against TNI maps into the unit fiber

**Statement.** Joint precomposition of ambient CP maps against TNI maps into the unit fiber. No TNI obligation is placed on the result. Formally:  $\exists X : \text{CPMap } m \ \ell, \text{HasSum } (\text{fun } i \Rightarrow \text{CPMap.comp } (f \ i) \ (g \ i) .\text{cp}) \ X$ .

**Proof.** By case analysis on  $a_i$ . The key step rewrites with the coordinate formula for intrinsic Choi composition, standard identities for finite indices, the usual algebraic identities and standard identities for infinite sums.

**Lean 4 source** [QLambda/Domain/Presheaf/ModuleChoiSum.lean](#)

```

theorem comp_from_one {? : Type} [Countable ?] {m ? : Nat}
  {f : ? -> CPMMap 1 ?} {? : CPMMap 1 ?}
  (g : ? -> Superoperator m 1) (hf : HasSum f ?) :
  exists ? : CPMMap m ?,
    HasSum (fun i => CPMMap.comp (f i) (g i).cp) ? := by
classical
have hfin (k : ?) (a b : Fin ?) (i j : Fin m) :
  (CPMap.comp (f k) (g k).cp).choi (a, i) (b, j) =
    (f k).choi (a, 0) (b, 0) * (g k).cp.choi (0, i) (0, j) := by
  simp [CPMap.choi_comp_apply, Fin.default_eq_zero]
have hentries (a b : Fin ?) (i j : Fin m) :
  Summable fun k : ? =>
    (CPMap.comp (f k) (g k).cp).choi (a, i) (b, j) := by
  simp_rw [hfin]
have ha : Summable fun k : ? => (f k).choi (a, 0) (b, 0) :=
  (Pi.hasSum.mp (Pi.hasSum.mp hf (a, (0 : Fin 1)))
    (b, (0 : Fin 1))).summable
have haN : Summable fun k : ? =>
  ?(f k).choi (a, 0) (b, 0)? * (m : ?) :=
  ha.norm.mul_right (m : ?)
refine Summable.of_norm_bounded haN fun k => ?_
rw [norm_mul]
have hb :=
  ChoiSum.entry_norm_le_trace_re (g k).cp.choi_pos (0, i) (0, j)
have htr := ChoiSum.trace_choi_re_le_input_dim (g k)
exact
  (mul_le_mul_of_nonneg_left (hb.trans htr) (norm_nonneg _)).trans_eq
    (by ring)
have hmat :
  Summable fun k : ? => (CPMap.comp (f k) (g k).cp).choi := by
  refine Pi.summable.mpr fun ai => Pi.summable.mpr fun bj => ?_
  rcases ai with <a, i>; rcases bj with <b, j>
  exact hentries a b i j
exact <<' k, (CPMap.comp (f k) (g k).cp).choi,
  ChoiSum.hasSum_posSemidef hmat.hasSum fun k =>
    (CPMap.comp (f k) (g k).cp).choi_pos>, hmat.hasSum>

```

#### 4.4.912 Joint precomposition of ambient CP maps against TNI maps into an arbitrary fiber dimension $d$

**Statement.** Joint precomposition of ambient CP maps against TNI maps into an arbitrary fiber dimension  $d$ . No TNI obligation is placed on the result (unlike `ChoiSum.comp_from_one`, which is fiber-1 only). Formally:  $\exists X : \text{CPMap } m \ell, \text{ HasSum } (\text{fun } i \Rightarrow \text{CPMap.comp } (f \ i) \ (g \ i).\text{cp}) \ X$ .

**Proof.** By case analysis on  $ai$ . The key step rewrites with the coordinate formula for intrinsic Choi composition, the usual algebraic identities, standard identities for infinite sums and standard identities for finite sums.

#### Lean 4 source `QLambda/Domain/Presheaf/ModuleChoiSum.lean`

```

theorem comp_from_dim {? : Type} [Countable ?] {m d ? : Nat}
  {f : ? -> CPMMap d ?} {? : CPMMap d ?}
  (g : ? -> Superoperator m d) (hf : HasSum f ?) :
  exists ? : CPMMap m ?,

```

```

    HasSum (fun i => CPMMap.comp (f i) (g i).cp) ? := by
classical
have hentries (a b : Fin ?) (i j : Fin m) :
  Summable fun k : ? =>
    (CPMMap.comp (f k) (g k).cp).choi (a, i) (b, j) := by
have hsum :
  Summable fun k : ? =>
    ? x : Fin d, ? y : Fin d,
    ?(f k).choi (a, x) (b, y)? * ((m : Nat) : ?) := by
  apply summable_sum
  intro x _
  apply summable_sum
  intro y _
  exact
    (((Pi.hasSum.mp (Pi.hasSum.mp hf (a, x)) (b, y))) .summable.norm).mul_right
      ((m : Nat) : ?))
refine Summable.of_norm_bounded hsum fun k => ?_
simp only [CPMMap.choi_comp_apply]
refine (norm_sum_le _ _).trans ?_
apply Finset.sum_le_sum
intro x _
refine (norm_sum_le _ _).trans ?_
apply Finset.sum_le_sum
intro y _
rw [norm_mul]
have hb :=
  ChoiSum.entry_norm_le_trace_re (g k).cp.choi_pos (x, i) (y, j)
have htr := ChoiSum.trace_choi_re_le_input_dim (g k)
exact mul_le_mul_of_nonneg_left (hb.trans htr) (norm_nonneg _)
have hmat :
  Summable fun k : ? => (CPMMap.comp (f k) (g k).cp).choi := by
  refine Pi.summable.mpr fun ai => Pi.summable.mpr fun bj => ?_
  rcases ai with <a, i>; rcases bj with <b, j>
  exact hentries a b i j
exact <<' k, (CPMMap.comp (f k) (g k).cp).choi,
  ChoiSum.hasSum_posSemidef hmat.hasSum fun k =>
    (CPMMap.comp (f k) (g k).cp).choi_pos>, hmat.hasSum>

```

#### 4.4.913 A module isomorphism, used without importing a second categorical interface

**Definition.** A module isomorphism, used without importing a second categorical interface.

**Construction.** An element consists of `inv`, subject to the laws `hom`, `hom_inv` and `inv_hom`.

**Lean 4 source** [QLambda/Domain/Presheaf/ModuleIso.lean](#)

```

structure Iso (M : Module.{u}) (N : Module.{v}) where
  hom : Hom M N
  inv : Hom N M
  hom_inv : Hom.comp hom inv = Hom.id N
  inv_hom : Hom.comp inv hom = Hom.id M

```

#### 4.4.914 Contravariant negation together with its canonical double-dual unit

**Definition.** Contravariant negation together with its canonical double-dual unit. This is structure consumed by the definition of the classical subcategory. The concrete instance must be constructed from Day internal `hom` into the tensor unit; no instance is declared in this file.

**Construction.** An element consists of `neg`, `map`, `map_comp`, `unit` and `unit_natural`, subject to the laws `map_id`.

##### Lean 4 source `QLambda/Domain/Presheaf/NegationData.lean`

```
structure NegationData where
  neg : Module.{u} -> Module.{u}
  map :
    {M N : Module.{u}} -> Hom M N -> Hom (neg N) (neg M)
  map_id :
    forall M, map (Hom.id M) = Hom.id (neg M)
  map_comp :
    forall {L M N : Module.{u}} (g : Hom M N) (f : Hom L M),
      map (Hom.comp g f) = Hom.comp (map f) (map g)
  unit :
    forall M, Hom M (neg (neg M))
  unit_natural :
    forall {M N : Module.{u}} (f : Hom M N),
      Hom.comp (unit N) f =
        Hom.comp (map (map f)) (unit M)
```

#### 4.4.915 The second dual of a module

**Definition.** The second dual of a module.

**Construction.** Defined to be the negation of the negation of `M`.

##### Lean 4 source `QLambda/Domain/Presheaf/NegationData.lean`

```
abbrev doubleDual (M : Module.{u}) : Module.{u} :=
  D.neg (D.neg M)
```

#### 4.4.916 The positive residual between Choi-comparable TNI maps

**Definition.** The positive residual between Choi-comparable TNI maps.

**Construction.** Defined by an explicit formula built from the map dominated by a given bound, the residual of order, the Choi matrix and the order equivalence.

##### Lean 4 source `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```
noncomputable def residual {n m : Nat} {f g : Superoperator n m}
  (h : f <= g) : Superoperator n m :=
  Superoperator.ofLE (CPMap.residualOfLE h) g (by
    change g.cp.choi - f.cp.choi <= g.cp.choi
    rw [Matrix.le_iff]
    have heq : g.cp.choi - (g.cp.choi - f.cp.choi) = f.cp.choi := by
      abel
    rw [heq]
    exact f.cp.choi_pos)
```

#### 4.4.917 Underlying completely positive map of the residual for superoperators

**Statement.** For natural numbers  $n, m$ , superoperators  $f, g$ : if  $f \leq g$ , then  $(\text{residual } h) \cdot \text{cp}$  equals the residual of order of  $h$ .

**Proof.** By definition: the left-hand side,  $(\text{residual } h) \cdot \text{cp}$ , and the right-hand side, the residual of order of  $h$ , unfold to the same term.

**Lean 4 source** [QLambda/Domain/Presheaf/OmegaEnriched.lean](#)

```
theorem cp_residual {n m : Nat} {f g : Superoperator n m} (h : f <= g) :  
  (residual h).cp = CMap.residualOfLE h :=  
  rfl
```

#### 4.4.918 Underlying completely positive map of a sum of the residual for superoperators

**Statement.** For natural numbers  $n, m$ , superoperators  $f, g$ : if  $f \leq g$ , then the sum of the underlying completely positive map of  $f$  and  $(\text{residual } h) \cdot \text{cp}$  equals the underlying completely positive map of  $g$ .

**Proof.** This is an instance of the addition of the residual of order for completely positive maps, applied to the hypothesis that  $f \leq g$ .

**Lean 4 source** [QLambda/Domain/Presheaf/OmegaEnriched.lean](#)

```
theorem cp_add_residual {n m : Nat} {f g : Superoperator n m} (h : f <= g) :  
  f.cp + (residual h).cp = g.cp :=  
  CMap.add_residualOfLE h
```

#### 4.4.919 Positive increments of an increasing chain

**Definition.** Positive increments of an increasing chain.

**Construction.** Defined by cases on the input:  $0 \mapsto$  the classical at 0;  $k + 1 \mapsto$  the residual of the  $hc$  of  $\text{Nat.le\_succ } k$ .

**Lean 4 source** [QLambda/Domain/Presheaf/OmegaEnriched.lean](#)

```
noncomputable def chainIncrement {n m : Nat}  
  (c : Nat -> Superoperator n m) (hc : Monotone c) :  
  Nat -> Superoperator n m  
| 0 => c 0  
| k + 1 => residual (hc (Nat.le_succ k))
```

#### 4.4.920 Sum of the chain increment of the underlying completely positive map for superoperators

**Statement.** For natural numbers  $n, m, N$ : if  $c$  is monotone, then  $\sum k \in \text{Finset.range } (N + 1), (\text{chainIncrement } c \text{ hc } k) \cdot \text{cp} = (c \text{ } N) \cdot \text{cp}$ .

**Proof.** By induction on the natural number  $N$ . For zero, the claim is checked directly; for a successor, the claim follows from the induction hypothesis. The key step rewrites with the definition of the chain increment, standard identities for finite sums and the underlying completely positive map of a sum of the residual for superoperators.

#### Lean 4 source `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```
theorem sum_chainIncrement_cp {n m : Nat}
  (c : Nat → Superoperator n m) (hc : Monotone c) (N : Nat) :
  ? k in Finset.range (N + 1), (chainIncrement c hc k).cp =
  (c N).cp := by
  induction N with
  | zero => simp [chainIncrement]
  | succ N ih =>
    rw [Finset.sum_range_succ, ih]
    exact cp_add_residual (hc (Nat.le_succ N))
```

#### 4.4.921 The trace of the Choi matrix equals the trace of the effect

**Statement.** For natural numbers  $n, m$ , a completely positive map  $f$ : the trace of the Choi matrix of  $f$  equals the trace of the effect of  $f$ .

**Proof.** The key step rewrites with standard identities for finite types and interchange of finite sums.

#### Lean 4 source `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```
theorem trace_choi_eq_trace_effect {n m : Nat} (f : CMap n m) :
  Matrix.trace f.choi = Matrix.trace f.effect := by
  change (? p : Fin m × Fin n, f.choi p p) =
  ? i : Fin n, ? a : Fin m, f.choi (a, i) (a, i)
  rw [Fintype.sum_prod_type, Finset.sum_comm]
```

#### 4.4.922 The trace of the Choi matrix of the real part is bounded by input of the dimension

**Statement.** For natural numbers  $n, m$ , a superoperator  $f$ :  $(\text{tr } f.\text{cp.choi}).\text{re} \leq n$ .

**Proof.** The key step rewrites with standard identities for matrices and the fact that the trace of the Choi matrix equals the trace of the effect.

#### Lean 4 source `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```
theorem trace_choi_re_le_input_dim {n m : Nat}
  (f : Superoperator n m) :
  (Matrix.trace f.cp.choi).re <= n := by
  have he :=
    CMap.effect_le_one_of_trace_nonincreasing f.cp
    f.trace_nonincreasing
  have hp : (1 - f.cp.effect).PosSemidef := Matrix.le_iff.mp he
  have ht := hp.trace_nonneg
  rw [Matrix.trace_sub, Matrix.trace_one] at ht
  have htre := (RCLike.nonneg_iff.mp ht).1
  rw [trace_choi_eq_trace_effect]
  simpa using htre
```

#### 4.4.923 Choi matrix of a finite sum of a finite sum for superoperators

**Statement.** For natural numbers  $n, m$ :  $(\sum i \in s, f i).\text{choi} = \sum i \in s, (f i).\text{choi}$ .



**Proof.** The argument proceeds by induction. The goal is simplified using the Choi matrix of zero for completely positive maps and the Choi matrix of a sum for completely positive maps.

#### Lean 4 source `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```
theorem choi_finset_sum {? : Type} {n m : Nat} [DecidableEq ?]
  (s : Finset ?) (f : ? -> CPMMap n m) :
  (? i in s, f i).choi = ? i in s, (f i).choi := by
  induction s using Finset.induction with
  | empty => simp [CPMap.choi_zero]
  | @insert a s ha ih => simp [ha, ih, CPMMap.choi_add]
```

#### 4.4.924 The trace Choi matrix finite-set sum

**Statement.** For natural numbers  $n, m$ : the trace of  $(\sum i \in s, f i).choi$  equals  $\sum i \in s, \text{tr}(f i).choi$ .

**Proof.** The argument proceeds by induction. The goal is simplified using the Choi matrix of zero for completely positive maps, the Choi matrix of a sum for completely positive maps and standard identities for matrices.

#### Lean 4 source `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```
theorem trace_choi_finset_sum {? : Type} {n m : Nat}
  (s : Finset ?) (f : ? -> CPMMap n m) :
  Matrix.trace (? i in s, f i).choi =
  ? i in s, Matrix.trace (f i).choi := by
  classical
  induction s using Finset.induction with
  | empty => simp [CPMap.choi_zero]
  | @insert a s ha ih =>
    simp [ha, ih, CPMMap.choi_add, Matrix.trace_add]
```

#### 4.4.925 Positive increments of every Choi-increasing TNI chain are summable

**Statement.** Positive increments of every Choi-increasing TNI chain are summable. Formally: `Summable (fun k => (chainIncrement c hc k).cp.choi)`.

**Proof.** By case analysis on `s.eq_empty_or_nonempty`. The key step rewrites with the sum of the chain increment of the underlying completely positive map for superoperators, the trace Choi matrix finite-set sum, standard identities for finite sums and standard identities for infinite sums.

#### Lean 4 source `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```
theorem chainIncrement_summable {n m : Nat}
  (c : Nat -> Superoperator n m) (hc : Monotone c) :
  Summable (fun k => (chainIncrement c hc k).cp.choi) := by
  let d := chainIncrement c hc
  let T : Nat -> ? := fun k => (Matrix.trace (d k).cp.choi).re
  have hTnonneg : 0 <= T :=
    fun k => SigmaMon.ChoiSum.trace_re_nonneg (d k).cp.choi_pos
  have hTsum : Summable T := by
    apply summable_of_sum_le hTnonneg (c := n)
```

```

intro s
rcases s.eq_empty_or_nonempty with hs | hs
* subst s
simp
* let N := s.max' hs
have hsubset : s ⊆ Finset.range (N + 1) := by
  intro k hk
  exact Finset.mem_range.mpr
    (Nat.lt_succ_of_le (Finset.le_max' s k hk))
calc
  ? k in s, T k ≤ ? k in Finset.range (N + 1), T k :=
    Finset.sum_le_sum_of_subset_of_nonneg hsubset
      (fun i _ => hTnonneg i)
_ = (Matrix.trace (c N).cp.choi).re := by
  rw [← sum_chainIncrement_cp c hc N]
  rw [trace_choi_finset_sum]
  change
    (? k in Finset.range (N + 1),
      Complex.reCLM
        (Matrix.trace (chainIncrement c hc k).cp.choi)) =
      Complex.reCLM
        (? k in Finset.range (N + 1),
          Matrix.trace (chainIncrement c hc k).cp.choi)
  exact
    (map_sum Complex.reCLM
      (fun k =>
        Matrix.trace (chainIncrement c hc k).cp.choi)
      (Finset.range (N + 1))).symm
_ ≤ n := trace_choi_re_le_input_dim (c N)
apply Pi.summable.mpr
intro i
apply Pi.summable.mpr
intro j
apply Summable.of_norm_bounded hTsum
intro k
exact SigmaMon.ChoiSum.entry_norm_le_trace_re
  (chainIncrement c hc k).cp.choi_pos i j

```

#### 4.4.926 The linear operation taking a Choi matrix to its input effect

**Definition.** The linear operation taking a Choi matrix to its input effect.

**Construction.** Constructed by supplying each component of the structure explicitly.

**Lean 4 source** [QLambda/Domain/Presheaf/OmegaEnriched.lean](#)

```

noncomputable def effectLinearMap (n m : Nat) :
  Matrix (Fin m × Fin n) (Fin m × Fin n) ? → ?[?]
  Matrix (Fin n) (Fin n) ? where
toFun A := fun i j => ? a, A (a, j) (a, i)
map_add' A B := by
  ext i j
  change
    (? a : Fin m, (A (a, j) (a, i) + B (a, j) (a, i))) = _
  rw [Finset.sum_add_distrib]

```

```

    rfl
map_smul' c A := by
  ext i j
  change (? a : Fin m, (c * A (a, j) (a, i))) = _
  rw [ <- Finset.mul_sum ]
  rfl

```

#### 4.4.927 Effect linear functorial action of the Choi matrix for superoperators

**Statement.** For natural numbers  $n, m$ , a completely positive map  $f$ : the effect linear functorial action of  $n, m$ , the Choi matrix of  $f$  equals the effect of  $f$ .

**Proof.** By definition. Unfolding the effect linear functorial action turns the left-hand side, the effect linear functorial action of  $n, m$ , the Choi matrix of  $f$ , into the right-hand side, the effect of  $f$ ; the two sides are the same term.

**Lean 4 source** [QLambda/Domain/Presheaf/OmegaEnriched.lean](#)

```

theorem effectLinearMap_choi {n m : Nat} (f : CPM n m) :
  effectLinearMap n m f.choi = f.effect :=
  rfl

```

#### 4.4.928 Choi-limit of an increasing TNI chain

**Definition.** Choi-limit of an increasing TNI chain.

**Construction.** Constructed interactively; by case analysis on  $K$ . For zero, the claim is checked directly; for a successor, the claim follows from the induction hypothesis. The key step rewrites with the characterization of the order for subnormalized density matrices, standard identities for matrices, the definition of the  $e$  and the Choi matrix of a sum for completely positive maps.

**Lean 4 source** [QLambda/Domain/Presheaf/OmegaEnriched.lean](#)

```

noncomputable def omegaSup {n m : Nat}
  (c : Nat -> Superoperator n m) (hc : Monotone c) :
  Superoperator n m := by
  let d := chainIncrement c hc
  let A : Matrix (Fin m x Fin n) (Fin m x Fin n) ? :=
    ?' k, (d k).cp.choi
  have hs : _root_.HasSum (fun k => (d k).cp.choi) A :=
    (chainIncrement_summable c hc).hasSum
  have hpos : A.PosSemidef :=
    SigmaMon.ChoiSum.hasSum_posSemidef hs
    (fun k => (d k).cp.choi_pos)
  let ? : CPM n m := <A, hpos>
  refine <?, CPM.trace_nonincreasing_of_effect_le_one ? ?_>
  have heff : _root_.HasSum
    (fun k => effectLinearMap n m (d k).cp.choi) ?.effect := by
  change _root_.HasSum
    (fun k => effectLinearMap n m (d k).cp.choi)
    (effectLinearMap n m A)
  exact hs.map (effectLinearMap n m)
    (LinearMap.continuous_of_finiteDimensional _)

```

```

have ht := heff.tendsto_sum_nat
rw [Matrix.le_iff, Matrix.posSemidef_iff_dotProduct_mulVec]
constructor
* exact Matrix.isHermitian_one.sub ?.effect_posSemidef.isHermitian
* intro x
  let E : Nat → Matrix (Fin n) (Fin n) ? := fun K =>
    ? k in Finset.range K, effectLinearMap n m (d k).cp.choi
  have htE : Filter.Tendsto E Filter.atTop (nhds ?.effect) := ht
  have hRpos (K : Nat) : (1 - E K).PosSemidef := by
    cases K with
    | zero =>
      simpa [E] using
        (Matrix.PosSemidef.one :
          (1 : Matrix (Fin n) (Fin n) ?).PosSemidef)
    | succ K =>
      have hcp := sum_chainIncrement_cp c hc K
      have hchoi :
        ? k in Finset.range (K + 1), (d k).cp.choi =
          (c K).cp.choi := by
        rw [← hcp]
        induction Finset.range (K + 1) using Finset.induction with
        | empty => simp
        | @insert a s ha ih =>
          simp [ha, ih, CPMMap.choi_add, d]
      have heq : E (K + 1) = (c K).cp.effect := by
        change
          (? k in Finset.range (K + 1),
            effectLinearMap n m (d k).cp.choi) = _
      rw [← map_sum (effectLinearMap n m)
          (fun k => (d k).cp.choi) (Finset.range (K + 1)),
          hchoi]
      rfl
      rw [heq]
      exact Matrix.le_iff.mp
        (CPMap.effect_le_one_of_trace_nonincreasing
          (c K).cp (c K).trace_nonincreasing)
  have htR : Filter.Tendsto (fun K => 1 - E K) Filter.atTop
    (nhds (1 - ?.effect)) :=
    tendsto_const_nhds.sub htE
  have hentry (i j : Fin n) : Filter.Tendsto
    (fun K => (1 - E K) i j) Filter.atTop
    (nhds ((1 - ?.effect) i j)) :=
    tendsto_pi_nhds.mp (tendsto_pi_nhds.mp htR i) j
  have hquad : Filter.Tendsto
    (fun K => star x ?? ((1 - E K) *? x)) Filter.atTop
    (nhds (star x ?? ((1 - ?.effect) *? x))) := by
    simp only [dotProduct, mulVec]
    apply tendsto_finsetSum Finset.univ
    intro i hi
    apply tendsto_const_nhds.mul
    apply tendsto_finsetSum Finset.univ
    intro j hj
    exact (hentry i j).mul tendsto_const_nhds
  apply RCLike.nonneg_iff.mpr
  constructor
  * apply ge_of_tendsto

```

```

    (Complex.continuous_re.continuousAt.tendsto.comp hquad)
  exact Filter.Eventually.of_forall
    (fun K => (hRpos K).re_dotProduct_nonneg x)
* have him : Filter.Tendsto
  (fun K => (star x ?? ((1 - E K) *? x)).im)
  Filter.atTop
  (nhds (star x ?? ((1 - ?effect) *? x)).im) :=
  Complex.continuous_im.continuousAt.tendsto.comp hquad
have hzero : Filter.Tendsto
  (fun _ : Nat => (0 : ?)) Filter.atTop (nhds 0) :=
  tendsto_const_nhds
exact tendsto_nhds_unique_of_eventuallyEq him hzero
(Filter.Eventually.of_forall fun K =>
  (RCLike.nonneg_iff.mp
    ((hRpos K).dotProduct_mulVec_nonneg x)).2)

```

#### 4.4.929 Monotone convergence commutes with every defined countable Choi sum

**Statement.** Monotone convergence commutes with every defined countable Choi sum. This is the finite-dimensional positive Fubini argument used below to take pointwise suprema of natural transformations into the tensor unit.

**Proof.** By case analysis on  $k$ . For zero and a successor, the claim is checked directly. It follows from the hypothesis that for every  $k$ , the family  $f\ k$  sums to  $g\ k$ , the reindexing for countable Choi sums, the group for countable Choi sums and the fact that positive increments of every Choi-increasing TNI chain are summable.

#### Lean 4 source `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```

theorem SigmaMon.ChoiSum.hasSum_omegaSup
  {? : Type} [Countable ?] {n m : Nat}
  (f : Nat -> ? -> Superoperator n m)
  (g : Nat -> Superoperator n m)
  (hf : forall i, Monotone (fun k => f k i))
  (hg : Monotone g)
  (hsum : forall k, SigmaMon.ChoiSum.HasSum (f k) (g k)) :
  SigmaMon.ChoiSum.HasSum
    (fun i => Superoperator.omegaSup (fun k => f k i) (hf i))
    (Superoperator.omegaSup g hg) := by
let d : Nat -> ? -> Superoperator n m :=
  fun k i => Superoperator.chainIncrement (fun r => f r i) (hf i) k
let e : Nat -> Superoperator n m :=
  Superoperator.chainIncrement g hg
have hrows : forall k, SigmaMon.ChoiSum.HasSum (d k) (e k) := by
  intro k
  cases k with
  | zero =>
    exact hsum 0
  | succ k =>
    change _root_.HasSum
      (fun i =>
        (f (k + 1) i).cp.choi - (f k i).cp.choi)
        ((g (k + 1)).cp.choi - (g k).cp.choi)
      exact (hsum (k + 1)).sub (hsum k)

```

```

have he :
  SigmaMon.ChoiSum.HasSum e (Superoperator.omegaSup g hg) :=
  (Superoperator.chainIncrement_summable g hg).hasSum
have hflatSummable :
  Summable
  (fun p : Sigma _ : Nat, ? => (d p.1 p.2).cp.choi) :=
  SigmaMon.ChoiSum.regroupingComplete d e hrows
  (Superoperator.chainIncrement_summable g hg)
have hflat :
  SigmaMon.ChoiSum.HasSum
  (fun p : Sigma _ : Nat, ? => d p.1 p.2)
  (Superoperator.omegaSup g hg) :=
  SigmaMon.ChoiSum.flatten_of_summable d e
  (Superoperator.omegaSup g hg) hrows he hflatSummable
let swap : (Sigma _ : ?, Nat) ? (Sigma _ : Nat, ?) :=
  { toFun := fun p => <p.2, p.1>
    invFun := fun p => <p.2, p.1>
    left_inv := fun _ => rfl
    right_inv := fun _ => rfl }
have hswap :
  SigmaMon.ChoiSum.HasSum
  (fun p : Sigma _ : ?, Nat => d p.2 p.1)
  (Superoperator.omegaSup g hg) := by
  exact (SigmaMon.ChoiSum.reindex swap
    (fun p : Sigma _ : Nat, ? => d p.1 p.2)
    (Superoperator.omegaSup g hg)).2 hflat
apply SigmaMon.ChoiSum.group
  (fun i k => d k i)
  (fun i => Superoperator.omegaSup (fun k => f k i) (hf i))
  (Superoperator.omegaSup g hg) hswap
intro i
exact (Superoperator.chainIncrement_summable
  (fun k => f k i) (hf i)).hasSum

```

#### 4.4.930 The positive cone of finite complex matrices is sequentially closed

**Statement.** The positive cone of finite complex matrices is sequentially closed. Formally:  $B.Pos$   $Semidef$ .

**Proof.** Both sides are compared pointwise (by extensionality). Each component of the claim is established separately. The key step rewrites with standard identities for matrices, the extensionality for bilinear maps, the definition of the congruence and standard identities for limits.

#### Lean 4 source `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```

theorem posSemidef_of_tendsto {q : Type} [Fintype q]
  (A : Nat -> Matrix q q ?) (B : Matrix q q ?)
  (hA : forall k, (A k).PosSemidef)
  (hlim : Filter.Tendsto A Filter.atTop (nhds B)) :
  B.PosSemidef := by
  rw [Matrix.posSemidef_iff_dotProduct_mulVec]
  constructor
  * apply Matrix.IsHermitian.ext
    intro i j
    have hij := tendsto_pi_nhds.mp (tendsto_pi_nhds.mp hlim i) j

```

```

have hji :=
  (tendsto_pi_nhds.mp (tendsto_pi_nhds.mp hlim j) i).star
apply tendsto_nhds_unique hji
apply hij.congr'
exact Filter.Eventually.of_forall fun k =>
  (hA k).isHermitian.apply i j |>.symm
* intro x
have hentry (i j : q) : Filter.Tendsto
  (fun k => A k i j) Filter.atTop (nhds (B i j)) :=
  tendsto_pi_nhds.mp (tendsto_pi_nhds.mp hlim i) j
have hquad : Filter.Tendsto
  (fun k => star x ?? (A k *? x)) Filter.atTop
  (nhds (star x ?? (B *? x))) := by
  simp only [dotProduct, mulVec]
  apply tendsto_finsetSum Finset.univ
  intro i hi
  apply tendsto_const_nhds.mul
  apply tendsto_finsetSum Finset.univ
  intro j hj
  exact (hentry i j).mul tendsto_const_nhds
apply RCLike.nonneg_iff.mpr
constructor
* apply ge_of_tendsto
  (Complex.continuous_re.continuousAt.tendsto.comp hquad)
exact Filter.Eventually.of_forall
  (fun k => (hA k).re_dotProduct_nonneg x)
* have him := Complex.continuous_im.continuousAt.tendsto.comp hquad
exact tendsto_nhds_unique_of_eventuallyEq him tendsto_const_nhds
  (Filter.Eventually.of_forall fun k =>
    (RCLike.nonneg_iff.mp
      ((hA k).dotProduct_mulVec_nonneg x)).2)

```

#### 4.4.931 The superoperator is bounded by an $\omega$ -chain supremum

**Statement.** For natural numbers  $n, m, N$ : if  $c$  is monotone, then  $c \ N \leq \omega\text{Sup } c \ hc$ .

**Proof.** The key step rewrites with standard identities for finite sums, the Choi matrix of a finite sum of a finite sum for superoperators, the characterization of the order for subnormalized density matrices and the usual algebraic identities.

#### Lean 4 source `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```

theorem le_omegaSup {n m : Nat} (c : Nat -> Superoperator n m)
  (hc : Monotone c) (N : Nat) :
  c N <= omegaSup c hc := by
  let d := chainIncrement c hc
  let F : Nat -> Matrix (Fin m x Fin n) (Fin m x Fin n) ? :=
    fun k => (d k).cp.choi
  have hs : Summable F := chainIncrement_summable c hc
  let s : Finset Nat := Finset.range (N + 1)
  let R := '?' k : Set.compl (s : Set Nat), F k
  have hR : R.PosSemidef :=
    SigmaMon.ChoiSum.hasSum_posSemidef
      (hs.subtype (Set.compl (s : Set Nat))).hasSum
      (fun k => (d k.1).cp.choi_pos)

```

```

have hdecomp :=
  hs.tsum_subtype_add_tsum_subtype_compl (s : Set Nat)
have hprefix : ?' k : (s : Set Nat), F k = (c N).cp.choi := by
  change (?' k : {k // k in s}, F k) = _
  rw [Finset.tsum_subtype s F]
  have hcp := congrArg CPMMap.choi (sum_chainIncrement_cp c hc N)
  rw [choi_finset_sum] at hcp
  simp only [s, F, d] using hcp
change (c N).cp.choi <= (omegaSup c hc).cp.choi
rw [Matrix.le_iff]
have httotal : ?' k, F k = (omegaSup c hc).cp.choi := rfl
rw [ <- httotal, <- hdecomp, hprefix, add_sub_cancel_left]
exact hR

```

#### 4.4.932 Order bound for the supremum of an $\omega$ -chain

**Statement.** For natural numbers  $n, m$ , a superoperator  $x$ : if  $c$  is monotone and for every  $N, c \ N \leq x$ , then  $\text{omegaSup } c \ hc \leq x$ .

**Proof.** By case analysis on  $K$ . For zero, the claim is checked directly; for a successor, the claim follows from the induction hypothesis. The key step rewrites with the definition of the  $p$ , the Choi matrix of a sum for completely positive maps, the characterization of the order for subnormalized density matrices and standard identities for matrices.

#### Lean 4 source `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```

theorem omegaSup_le {n m : Nat} (c : Nat -> Superoperator n m)
  (hc : Monotone c) (x : Superoperator n m)
  (hx : forall N, c N <= x) :
  omegaSup c hc <= x := by
  let d := chainIncrement c hc
  have hs : _root_.HasSum (fun k => (d k).cp.choi)
    (omegaSup c hc).cp.choi :=
    (chainIncrement_summable c hc).hasSum
  let P : Nat -> Matrix (Fin m x Fin n) (Fin m x Fin n) ? :=
    fun K => ?' k in Finset.range K, (d k).cp.choi
  have htP : Filter.Tendsto P Filter.atTop
    (nhds (omegaSup c hc).cp.choi) :=
    hs.tendsto_sum_nat
  have hpos (K : Nat) : (x.cp.choi - P K).PosSemidef := by
    cases K with
    | zero => simp [P] using x.cp.choi_pos
    | succ K =>
      have hcp := sum_chainIncrement_cp c hc K
      have heq : P (K + 1) = (c K).cp.choi := by
        change
        (?' k in Finset.range (K + 1), (d k).cp.choi) = _
      rw [ <- hcp]
      induction Finset.range (K + 1) using Finset.induction with
      | empty => simp
      | @insert a s ha ih =>
        simp [ha, ih, CPMMap.choi_add, d]
      rw [heq]
      exact Matrix.le_iff.mp (hx K)
  change (omegaSup c hc).cp.choi <= x.cp.choi

```



```

rw [Matrix.le_iff]
exact posSemidef_of_tendsto
  (fun K => x.cp.choi - P K)
  (x.cp.choi - (omegaSup c hc).cp.choi) hpos
  (tendsto_const_nhds.sub htP)

```

#### 4.4.933 Monotonicity of the composition of the monotonicity

**Statement.** For natural numbers  $n, m, l$ , a superoperator  $g$ :  $\text{fun } f$  is monotone.

**Proof.** Each component of the claim is established separately. The key step rewrites with the composition of a sum for completely positive maps, in the right argument, the underlying completely positive map of a sum of the residual for superoperators and the fact that Choi order is exactly existence of a completely positive residual.

**Lean 4 source** [QLambda/Domain/Presheaf/OmegaEnriched.lean](#)

```

theorem comp_mono_left {n m l : Nat} (g : Superoperator n m) :
  Monotone (fun f : Superoperator m l => comp f g) := by
  intro f h hfh
  let r := residual hfh
  change CPMMap.comp f.cp g.cp <= CPMMap.comp h.cp g.cp
  apply (CPMap.le_iff_exists_add _ _).2
  refine <CPMap.comp r.cp g.cp, ?_>
  rw [ <- CPMMap.comp_add_right, cp_add_residual]

```

#### 4.4.934 Monotonicity of the composition of the monotonicity

**Statement.** For natural numbers  $n, m, l$ , a superoperator  $f$ :  $\text{fun } g$  is monotone.

**Proof.** Each component of the claim is established separately. The key step rewrites with the composition of a sum for completely positive maps, in the left argument, the underlying completely positive map of a sum of the residual for superoperators and the fact that Choi order is exactly existence of a completely positive residual.

**Lean 4 source** [QLambda/Domain/Presheaf/OmegaEnriched.lean](#)

```

theorem comp_mono_right {n m l : Nat} (f : Superoperator m l) :
  Monotone (fun g : Superoperator n m => comp f g) := by
  intro g h hgh
  let r := residual hgh
  change CPMMap.comp f.cp g.cp <= CPMMap.comp f.cp h.cp
  apply (CPMap.le_iff_exists_add _ _).2
  refine <CPMap.comp f.cp r.cp, ?_>
  rw [ <- CPMMap.comp_add_left, cp_add_residual]

```

#### 4.4.935 Choi matrix of the limit of an $\omega$ -chain supremum for superoperators

**Statement.** For natural numbers  $n, m$ : if  $c$  is monotone, then  $\text{fun } N \Rightarrow (c\ N).cp.choi$  converges along  $\text{Filter.atTop}$  to  $\text{nhds } (\omega\text{Sup } c\ hc).cp.choi$ .

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the Choi matrix of a finite sum of a finite sum for superoperators.

#### Lean 4 source `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```
theorem chои_tendsto_omegaSup {n m : Nat}
  (c : Nat -> Superoperator n m) (hc : Monotone c) :
  Filter.Tendsto (fun N => (c N).cp.choi) Filter.atTop
    (nhds (omegaSup c hc).cp.choi) := by
  let d := chainIncrement c hc
  have hs : _root_.HasSum (fun k => (d k).cp.choi)
    (omegaSup c hc).cp.choi :=
    (chainIncrement_summable c hc).hasSum
  have ht :=
    hs.tendsto_sum_nat.comp (Filter.tendsto_add_atTop_nat 1)
  convert ht using 1
  funext N
  have hcp := congrArg CPMaр.choi (sum_chainIncrement_cp c hc N)
  rw [choi_finset_sum] at hcp
  simpa only [d, Function.comp_apply] using hcp.symm
```

#### 4.4.936 The Choi matrix composition limit left

**Statement.** For natural numbers  $n, m, l$ , a superoperator  $g$ : if  $c$  is monotone, then  $\text{fun } N \Rightarrow (\text{comp } (c \ N) \ g) \cdot \text{cp} \cdot \text{choi}$  converges along  $\text{Filter.atTop}$  to  $\text{nhds } (\text{comp } (\text{omegaSup } c \ hc) \ g) \cdot \text{cp} \cdot \text{choi}$ .

**Proof.** By case analysis on  $ai$ . The goal is simplified using the underlying completely positive map of a composite for superoperators and the coordinate formula for intrinsic Choi composition.

#### Lean 4 source `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```
theorem chои_comp_tendsto_left {n m l : Nat}
  (c : Nat -> Superoperator m l) (hc : Monotone c)
  (g : Superoperator n m) :
  Filter.Tendsto (fun N => (comp (c N) g).cp.choi) Filter.atTop
    (nhds (comp (omegaSup c hc) g).cp.choi) := by
  have ht := chои_tendsto_omegaSup c hc
  apply tendsto_pi_nhds.mpr
  intro ai
  apply tendsto_pi_nhds.mpr
  intro bj
  rcases ai with <a, i>
  rcases bj with <b, j>
  simp only [cp_comp, CPMaр.choi_comp_apply]
  apply tendsto_finsetSum Finset.univ
  intro x hx
  apply tendsto_finsetSum Finset.univ
  intro y hy
  exact
    (tendsto_pi_nhds.mp
      (tendsto_pi_nhds.mp ht (a, x)) (b, y)).mul
      tendsto_const_nhds
```

#### 4.4.937 The Choi matrix composition limit right

**Statement.** For natural numbers  $n, m, l$ , a superoperator  $f$ : if  $c$  is monotone, then  $\text{fun } N \Rightarrow (\text{comp } f \ (c \ N)).\text{cp.choi}$  converges along  $\text{Filter.atTop}$  to  $\text{nhds } (\text{comp } f \ (\text{omegaSup } c \ hc)).\text{cp.choi}$ .

**Proof.** By case analysis on  $ai$ . The goal is simplified using the underlying completely positive map of a composite for superoperators, the coordinate formula for intrinsic Choi composition and the usual algebraic identities.

**Lean 4 source** [QLambda/Domain/Presheaf/OmegaEnriched.lean](#)

```
theorem choi_comp_tendsto_right {n m l : Nat}
  (f : Superoperator m l) (c : Nat -> Superoperator n m)
  (hc : Monotone c) :
  Filter.Tendsto (fun N => (comp f (c N)).cp.choi) Filter.atTop
    (nhds (comp f (omegaSup c hc)).cp.choi) := by
  have ht := choi_tendsto_omegaSup c hc
  apply tendsto_pi_nhds.mpr
  intro ai
  apply tendsto_pi_nhds.mpr
  intro bj
  rcases ai with <a, i>
  rcases bj with <b, j>
  simp only [cp_comp, CMap.choi_comp_apply]
  apply tendsto_finsetSum Finset.univ
  intro x hx
  apply tendsto_finsetSum Finset.univ
  intro y hy
  exact tendsto_const_nhds.mul
    (tendsto_pi_nhds.mp
      (tendsto_pi_nhds.mp ht (x, i)) (y, j))
```

#### 4.4.938 Postcomposition by an isomorphism of codomains

**Definition.** Postcomposition by an isomorphism of codomains.

**Construction.** Constructed by supplying each component of the structure explicitly.

**Lean 4 source** [QLambda/Domain/Presheaf/OmegaEnriched.lean](#)

```
noncomputable def Hom.postcompEquiv {M N P : Module} (? : Iso N P) :
  Hom M N ? Hom M P where
  toFun f := Hom.comp ?.hom f
  invFun g := Hom.comp ?.inv g
  left_inv f := by
    change Hom.comp ?.inv (Hom.comp ?.hom f) = f
    rw [Hom.comp_assoc, ?.inv_hom, Hom.id_comp]
  right_inv g := by
    change Hom.comp ?.hom (Hom.comp ?.inv g) = g
    rw [Hom.comp_assoc, ?.hom_inv, Hom.id_comp]
```

#### 4.4.939 Day closedness specialized to maps into the tensor unit: $\text{Hom}(M, \neg\neg N) \simeq \text{Hom}(M \otimes \neg N, I)$

**Definition.** Day closedness specialized to maps into the tensor unit:  $\text{Hom}(M, \neg\neg N) \simeq \text{Hom}(M \otimes \neg N, I)$ .

**Construction.** Defined by an explicit formula built from the closed term, the negation and the Day tensor unit.

**Lean 4 source** `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```
noncomputable def closedPairingDoubleDual (M N : Module) :
  Hom M (DayNegation.neg (DayNegation.neg N)) ?
  Hom (dayTensor M (DayNegation.neg N)) dayTensorUnit :=
  (dayClosedPresentation.closed M (DayNegation.neg N)
   dayTensorUnit).symm
```

#### 4.4.940 Closed pairing for an exhibited double-dual isomorphism

**Definition.** Closed pairing for an exhibited double-dual isomorphism.

**Construction.** Defined to be  $(\text{Hom.postcompEquiv } \rho).trans \text{ (closedPairingDoubleDual } M \text{ } N)$ .

**Lean 4 source** `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```
noncomputable def closedPairingEquivOfIso (M N : Module)
  (? : Iso N (DayNegation.neg (DayNegation.neg N))) :
  Hom M N ?
  Hom (dayTensor M (DayNegation.neg N)) dayTensorUnit :=
  (Hom.postcompEquiv ?).trans (closedPairingDoubleDual M N)
```

#### 4.4.941 Closed pairing for a Day-biorthogonal classical object: $\text{Hom}(M, N) \simeq \text{Hom}(M \otimes \neg N, I)$

**Definition.** Closed pairing for a Day-biorthogonal classical object:  $\text{Hom}(M, N) \simeq \text{Hom}(M \otimes \neg N, I)$ .

**Construction.** Defined to be the closed term pairing equivalence of isomorphism of  $M$ , the module of  $N$ , the reflexive of  $N$ .

**Lean 4 source** `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```
noncomputable def closedPairingEquiv (M : Module)
  (N : BiorthogonalObject) :
  Hom M N.module ?
  Hom (dayTensor M (DayNegation.neg N.module)) dayTensorUnit :=
  closedPairingEquivOfIso M N.module N.reflexive
```

#### 4.4.942 Evaluation of the closed adjunction on generators

**Statement.** Evaluation of the closed adjunction on generators.

**Proof.** The goal is simplified using the definition of the Day closed term presentation.

**Lean 4 source** `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```

theorem dayClosed_app {X A L : Module}
  (phi : Hom (dayTensor X A) L) {n p q : Nat}
  (x : (X.obj n).Carrier) (r : Superoperator p n)
  (y : (A.obj q).Carrier) :
  ((dayClosedPresentation.closed X A L phi).app n x).app r y =
    phi.app (p * q) ((DayCoend.intro X A).app (X.act x r) y) := by
  dsimp [dayClosedPresentation, DayClosedPresentation.closed]
  rfl

```

#### 4.4.943 Left naturality of Day closedness

**Statement.** Left naturality of Day closedness.

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the components of the composition, the functorial action on an introduced element, the components of the identity and the extensionality for module morphisms.

**Lean 4 source** [QLambda/Domain/Presheaf/OmegaEnriched.lean](#)

```

theorem dayClosed_comp_left {X X' A L : Module}
  (u : Hom X' X) (phi : Hom (dayTensor X A) L) :
  Hom.comp (dayClosedPresentation.closed X A L phi) u =
    dayClosedPresentation.closed X' A L
      (Hom.comp phi (DayTensor.map u (Hom.id A))) := by
  apply Hom.ext
  intro n x
  apply Bilinear.ext
  intro p q r y
  change Superoperator p n at r
  have hL := dayClosed_app phi (u.app n x) r y
  have hR :=
    dayClosed_app (Hom.comp phi (DayTensor.map u (Hom.id A))) x r y
  refine hL.trans (Eq.trans ?_ hR.symm)
  rw [Hom.comp_app, DayTensor.map_intro, Hom.id_app, u.naturality]

```

#### 4.4.944 Inverse form of left naturality used by the closed pairing

**Statement.** Inverse form of left naturality used by the closed pairing.

**Proof.** The key step rewrites with standard identities for equivalences.

**Lean 4 source** [QLambda/Domain/Presheaf/OmegaEnriched.lean](#)

```

theorem closedPairingDoubleDual_comp_left {M M' N : Module}
  (u : Hom M' M)
  (phi : Hom M (DayNegation.neg (DayNegation.neg N))) :
  closedPairingDoubleDual M' N (Hom.comp phi u) =
    Hom.comp (closedPairingDoubleDual M N phi)
      (DayTensor.map u (Hom.id (DayNegation.neg N))) := by
  let e :=
    dayClosedPresentation.closed M' (DayNegation.neg N) dayTensorUnit
  let e_0 :=
    dayClosedPresentation.closed M (DayNegation.neg N) dayTensorUnit
  have h := dayClosed_comp_left u (closedPairingDoubleDual M N phi)

```

```

have hphi : e_0 (closedPairingDoubleDual M N phi) = phi :=
  Equiv.apply_symm_apply e_0 phi
rw [hphi] at h
have h' := congrArg e.symm h
rw [Equiv.symm_apply_apply] at h'
exact h'

```

#### 4.4.945 Closed term pairing equivalence of isomorphism of a composite, in the left argument

**Statement.** For superoperator modules  $M, M', N$ , module morphisms  $u, f$ :  $\text{closedPairingEquivOfIso } M' \ N \ \rho \ (\text{Hom.comp } f \ u)$  equals the composite of  $\text{closedPairingEquivOfIso } M \ N \ \rho \ f$  after the functorial action of  $u$  and  $\text{Hom.id } (\text{DayNegation.neg } N)$ .

**Proof.** The key step rewrites with the fact that composition for module morphisms is associative and the inverse form of left naturality used by the closed pairing.

#### Lean 4 source `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```

theorem closedPairingEquivOfIso_comp_left {M M' N : Module}
  (? : Iso N (DayNegation.neg (DayNegation.neg N)))
  (u : Hom M' M) (f : Hom M N) :
  closedPairingEquivOfIso M' N ? (Hom.comp f u) =
    Hom.comp (closedPairingEquivOfIso M N ? f)
      (DayTensor.map u (Hom.id (DayNegation.neg N))) := by
change closedPairingDoubleDual M' N
  (Hom.comp ?.hom (Hom.comp f u)) =
    Hom.comp (closedPairingDoubleDual M N (Hom.comp ?.hom f))
      (DayTensor.map u (Hom.id (DayNegation.neg N)))
  rw [Hom.comp_assoc]
  exact closedPairingDoubleDual_comp_left u (Hom.comp ?.hom f)

```

#### 4.4.946 Closed term pairing equivalence of a composite, in the left argument

**Statement.** For superoperator modules  $M, M'$ , module morphisms  $u, f$ : the closed term pairing equivalence of  $M', N$ , the composite of  $f$  after  $u$  equals the composite of the closed term pairing equivalence of  $M, N$ ,  $f$  after the functorial action of  $u$  and  $\text{Hom.id } (\text{DayNegation.neg } N.\text{module})$ .

**Proof.** This is an instance of the closed term pairing equivalence of isomorphism of a composite, in the left argument.

#### Lean 4 source `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```

theorem closedPairingEquiv_comp_left {M M' : Module}
  (N : BiorthogonalObject) (u : Hom M' M)
  (f : Hom M N.module) :
  closedPairingEquiv M' N (Hom.comp f u) =
    Hom.comp (closedPairingEquiv M N f)
      (DayTensor.map u (Hom.id (DayNegation.neg N.module))) :=
closedPairingEquivOfIso_comp_left N.reflexive u f

```

#### 4.4.947 Right naturality of Day closedness into the tensor unit

**Statement.** Right naturality of Day closedness into the tensor unit.

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the components of the composition, the functorial action on an introduced element, the components of the identity and the extensionality for module morphisms.

**Lean 4 source** `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```
theorem dayClosed_comp_right_unit {X A A' : Module}
  (h : Hom A' A) (phi : Hom (dayTensor X A) dayTensorUnit) :
  Hom.comp (DayNegation.map h)
    (dayClosedPresentation.closed X A dayTensorUnit phi) =
    dayClosedPresentation.closed X A' dayTensorUnit
      (Hom.comp phi (DayTensor.map (Hom.id X) h)) := by
  apply Hom.ext
  intro n x
  apply Bilinear.ext
  intro p q r y
  change Superoperator p n at r
  have hL := dayClosed_app phi x r (h.app q y)
  have hR :=
    dayClosed_app (Hom.comp phi (DayTensor.map (Hom.id X) h)) x r y
  change
    ((dayClosedPresentation.closed X A dayTensorUnit phi).app n x).app r
      (h.app q y) =
      ((dayClosedPresentation.closed X A' dayTensorUnit
        (Hom.comp phi (DayTensor.map (Hom.id X) h))).app n x).app r y
  refine hL.trans (Eq.trans ?_ hR.symm)
  rw [Hom.comp_app, DayTensor.map_intro, Hom.id_app]
```

#### 4.4.948 Inverse form of right naturality for the closed pairing

**Statement.** Inverse form of right naturality for the closed pairing.

**Proof.** The key step rewrites with standard identities for equivalences.

**Lean 4 source** `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```
theorem closedPairingDoubleDual_comp_right {M N N' : Module}
  (v : Hom N N')
  (phi : Hom M (DayNegation.neg (DayNegation.neg N))) :
  closedPairingDoubleDual M N'
    (Hom.comp (DayNegation.map (DayNegation.map v)) phi) =
    Hom.comp (closedPairingDoubleDual M N phi)
      (DayTensor.map (Hom.id M) (DayNegation.map v)) := by
  let e' :=
    dayClosedPresentation.closed M (DayNegation.neg N') dayTensorUnit
  let e :=
    dayClosedPresentation.closed M (DayNegation.neg N) dayTensorUnit
  have h :=
    dayClosed_comp_right_unit (DayNegation.map v)
      (closedPairingDoubleDual M N phi)
  have hphi : e (closedPairingDoubleDual M N phi) = phi :=
    Equiv.apply_symm_apply e phi
```

```

rw [hphi] at h
have h' := congrArg e'.symm h
rw [Equiv.symm_apply_apply] at h'
exact h'

```

#### 4.4.949 Closed term pairing equivalence of isomorphism of a composite, in the right argument

**Statement.** For superoperator modules  $M, N, N'$ , module morphisms  $v, f$ : if for every  $v$ ,  $\text{Hom.comp } \rho'.\text{hom } v = \text{Hom.comp } (\text{DayNegation.map } (\text{DayNegation.map } v)) \rho.\text{hom}$ , then  $\text{closedPairingEquivOfIso } M N' \rho' (\text{Hom.comp } v f)$  equals the composite of  $\text{closedPairingEquivOfIso } M N \rho f$  after the functorial action of  $\text{Hom.id } M$  and  $\text{DayNegation.map } v$ .

**Proof.** The key step rewrites with the fact that composition for module morphisms is associative, the hypothesis that for every  $v$ ,  $\text{Hom.comp } \rho'.\text{hom } v = \text{Hom.comp } (\text{DayNegation.map } (\text{DayNegation.map } v)) \rho.\text{hom}$  and the inverse form of right naturality for the closed pairing.

**Lean 4 source** [QLambda/Domain/Presheaf/OmegaEnriched.lean](#)

```

theorem closedPairingEquivOfIso_comp_right {M N N' : Module}
  (? : Iso N (DayNegation.neg (DayNegation.neg N)))
  (?' : Iso N' (DayNegation.neg (DayNegation.neg N')))
  (hunit : forall v : Hom N N',
    Hom.comp ?'.hom v =
      Hom.comp (DayNegation.map (DayNegation.map v)) ?'.hom)
  (v : Hom N N') (f : Hom M N) :
  closedPairingEquivOfIso M N' ?' (Hom.comp v f) =
    Hom.comp (closedPairingEquivOfIso M N ? f)
      (DayTensor.map (Hom.id M) (DayNegation.map v)) := by
change closedPairingDoubleDual M N'
  (Hom.comp ?'.hom (Hom.comp v f)) =
    Hom.comp (closedPairingDoubleDual M N (Hom.comp ?'.hom f))
      (DayTensor.map (Hom.id M) (DayNegation.map v))
  rw [Hom.comp_assoc, hunit v, <- Hom.comp_assoc]
  exact closedPairingDoubleDual_comp_right v (Hom.comp ?'.hom f)

```

#### 4.4.950 Closed term pairing equivalence of a composite, in the right argument

**Statement.** For a superoperator module  $M$ , module morphisms  $v, f$ : the closed term pairing equivalence of  $M, N'$ , the composite of  $v$  after  $f$  equals the composite of the closed term pairing equivalence of  $M, N$ ,  $f$  after the functorial action of  $\text{Hom.id } M$  and  $\text{DayNegation.map } v$ .

**Proof.** The key step rewrites with the definition of the data, the closed term pairing equivalence of isomorphism of a composite, in the right argument and the naturality of the canonical double-negation unit.

**Lean 4 source** [QLambda/Domain/Presheaf/OmegaEnriched.lean](#)

```

theorem closedPairingEquiv_comp_right {M : Module}
  {N N' : BiorthogonalObject} (v : Hom N.module N'.module)
  (f : Hom M N.module) :
  closedPairingEquiv M N' (Hom.comp v f) =
    Hom.comp (closedPairingEquiv M N f)
      (DayTensor.map (Hom.id M) (DayNegation.map v)) := by
  refine closedPairingEquivOfIso_comp_right

```



```

      N.reflexive N'.reflexive ?_ v f
intro w
have hN' : N'.reflexive.hom = DayNegation.unit N'.module := by
  simpa [DayNegation.data] using N'.canonical
have hN : N.reflexive.hom = DayNegation.unit N.module := by
  simpa [DayNegation.data] using N.canonical
rw [hN', hN]
exact DayNegation.unit_natural w

```

#### 4.4.951 Day closed structure of zero

**Statement.** For superoperator modules  $X, A, L$ :  $\text{dayClosedPresentation.closed } X \ A \ L \ 0 = 0$ .

**Proof.** Both sides are compared pointwise (by extensionality). The goal is simplified using the definition of the Day closed term presentation, the extensionality for module morphisms and the extensionality for bilinear maps.

**Lean 4 source** [QLambda/Domain/Presheaf/OmegaEnriched.lean](#)

```

theorem dayClosed_zero (X A L : Module) :
  dayClosedPresentation.closed X A L 0 = 0 := by
  apply Hom.ext
  intro n x
  apply Bilinear.ext
  intro p q r y
  dsimp [dayClosedPresentation, DayClosedPresentation.closed]
  rfl

```

#### 4.4.952 Closed term pairing double dual of zero

**Statement.** For superoperator modules  $M, N$ : the closed term pairing double dual of  $M$  and  $N$  at  $0$  equals  $0$ .

**Proof.** The key step rewrites with standard identities for equivalences and the Day closed structure of zero.

**Lean 4 source** [QLambda/Domain/Presheaf/OmegaEnriched.lean](#)

```

theorem closedPairingDoubleDual_zero (M N : Module) :
  closedPairingDoubleDual M N 0 = 0 := by
  let e :=
    dayClosedPresentation.closed M (DayNegation.neg N) dayTensorUnit
  apply e.injective
  change e (e.symm 0) = e 0
  rw [Equiv.apply_symm_apply, dayClosed_zero]

```

#### 4.4.953 Closed term pairing equivalence of isomorphism of zero

**Statement.** For superoperator modules  $M, N$ :  $\text{closedPairingEquivOfIso } M \ N \ \rho \ 0 = 0$ .

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the closed term pairing double dual of zero.

#### Lean 4 source `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```
theorem closedPairingEquivOfIso_zero {M N : Module}
  (? : Iso N (DayNegation.neg (DayNegation.neg N))) :
  closedPairingEquivOfIso M N ? 0 = 0 := by
  change closedPairingDoubleDual M N (Hom.comp ?.hom 0) = 0
  have h0 : Hom.comp ?.hom (0 : Hom M N) = 0 := by
    ext n x
    exact ?.hom.map_zero n
  rw [h0, closedPairingDoubleDual_zero]
```

#### 4.4.954 Closed term pairing equivalence of zero

**Statement.** For a superoperator module  $M$ : the closed term pairing equivalence of  $M$  and  $N$  at  $0$  equals  $0$ .

**Proof.** This is an instance of the closed term pairing equivalence of isomorphism of zero.

#### Lean 4 source `QLambda/Domain/Presheaf/OmegaEnriched.lean`

```
theorem closedPairingEquiv_zero (M : Module) (N : BiorthogonalObject) :
  closedPairingEquiv M N 0 = 0 :=
  closedPairingEquivOfIso_zero N.reflexive
```

#### 4.4.955 Monotonicity of the unit morphism of the precomposition

**Statement.** For superoperator modules  $P, Q$ , a module morphism  $u$ :  $\text{fun } f$  is monotone.

**Proof.** The claim follows directly from the definitions of the objects involved.

#### Lean 4 source `QLambda/Domain/Presheaf/OmegaEnrichedInstances.lean`

```
theorem unitHom_precomp_mono {P Q : Module} (u : Hom P Q) :
  Monotone (fun f : Hom Q dayTensorUnit => Hom.comp f u) := by
  intro f g h n x
  exact h n (u.app n x)
```

#### 4.4.956 Precomposition preserves pointwise increasing suprema

**Statement.** Precomposition preserves pointwise increasing suprema.

**Proof.** Both sides are compared pointwise (by extensionality). It follows from the extensionality for module morphisms.

#### Lean 4 source `QLambda/Domain/Presheaf/OmegaEnrichedInstances.lean`

```
theorem unitHom_precomp_omegaSup {P Q : Module}
  (c : Nat -> Hom Q dayTensorUnit) (hc : Monotone c) (u : Hom P Q) :
  Hom.comp (QLambda.Domain.OmegaComplete.?Sup c hc) u =
  QLambda.Domain.OmegaComplete.?Sup
    (fun k => Hom.comp (c k) u)
    ((unitHom_precomp_mono u).comp hc) := by
  apply Hom.ext
  intro n x
  rfl
```

#### 4.4.957 On the Day unit, every endomorphism acts by ordinary superoperator composition with its value at the identity

**Statement.** On the Day unit, every endomorphism acts by ordinary superoperator composition with its value at the identity. Formally:  $v.\text{app } n \ z = \text{Superoperator.comp } (v.\text{app } 1 \ (\text{Superoperator.identity } 1)) : \text{Superoperator } 1 \ 1) \ z$ .

**Proof.** The claim follows directly from the definitions of the objects involved.

**Lean 4 source** `QLambda/Domain/Presheaf/OmegaEnrichedInstances.lean`

```
theorem unitHom_app_eq_comp
  (v : Hom dayTensorUnit dayTensorUnit) {n : Nat}
  (z : Superoperator n 1) :
  (v.app n z : Superoperator n 1) =
    Superoperator.comp
      (v.app 1 (Superoperator.identity 1) : Superoperator 1 1) z := by
have hn1 :
  (v.app n (Superoperator.comp (Superoperator.identity 1) z) :
    Superoperator n 1) =
    Superoperator.comp
      (v.app 1 (Superoperator.identity 1) : Superoperator 1 1) z :=
  v.naturality (Superoperator.identity 1) z
rwa [Superoperator.identity_comp] at hn1
```

#### 4.4.958 Postcomposition by a fixed map of the tensor unit is monotone

**Statement.** Postcomposition by a fixed map of the tensor unit is monotone. Formally:  $\text{Monotone } \text{fun } f \mapsto$

**Proof.** The key step rewrites with the on the Day unit, every endomorphism acts by ordinary superoperator composition with its value at the identity and the monotonicity of the composition of the monotonicity.

**Lean 4 source** `QLambda/Domain/Presheaf/OmegaEnrichedInstances.lean`

```
theorem unitHom_postcomp_mono {P : Module}
  (v : Hom dayTensorUnit dayTensorUnit) :
  Monotone (fun f : Hom P dayTensorUnit => Hom.comp v f) := by
intro f g hfg n x
change
  (show Superoperator n 1 from v.app n (f.app n x)) <=
  (show Superoperator n 1 from v.app n (g.app n x))
rw [unitHom_app_eq_comp v (show Superoperator n 1 from f.app n x),
  unitHom_app_eq_comp v (show Superoperator n 1 from g.app n x)]
exact Superoperator.comp_mono_right _ (hfg n x)
```

#### 4.4.959 Postcomposition preserves pointwise increasing suprema into the unit

**Statement.** Postcomposition preserves pointwise increasing suprema into the unit.

**Proof.** Both sides are compared pointwise (by extensionality). Equality is proved by showing both inequalities. The key step rewrites with the extensionality for module morphisms, the on the Day unit, every endomorphism acts by ordinary superoperator composition with its value at the identity, antisymmetry of the order and the order bound for the supremum of an  $\omega$ -chain.

## Lean 4 source `QLambda/Domain/Presheaf/OmegaEnrichedInstances.lean`

```

theorem unitHom_postcomp_omegaSup {P : Module}
  (v : Hom dayTensorUnit dayTensorUnit)
  (c : Nat -> Hom P dayTensorUnit) (hc : Monotone c) :
  Hom.comp v (QLambda.Domain.OmegaComplete.?Sup c hc) =
    QLambda.Domain.OmegaComplete.?Sup
      (fun k => Hom.comp v (c k))
      ((unitHom_postcomp_mono v).comp hc) := by
  apply Hom.ext
  intro n x
  let phi : Superoperator 1 1 := v.app 1 (Superoperator.identity 1)
  let d : Nat -> Superoperator n 1 := fun k => (c k).app n x
  have hd : Monotone d := fun _ _ h => hc h n x
  let z : Superoperator n 1 :=
    (QLambda.Domain.OmegaComplete.?Sup c hc).app n x
  have hz : z = Superoperator.omegaSup d hd := rfl
  let e : Nat -> Superoperator n 1 :=
    fun k => v.app n ((c k).app n x)
  have he : Monotone e := fun _ _ h =>
    (unitHom_postcomp_mono v).comp hc h n x
  have hL : (v.app n z : Superoperator n 1) =
    Superoperator.comp phi (Superoperator.omegaSup d hd) := by
    rw [ <- hz ]
  exact unitHom_app_eq_comp v z
  have hMid :
    Superoperator.comp phi (Superoperator.omegaSup d hd) =
      Superoperator.omegaSup (fun k => Superoperator.comp phi (d k))
        ((Superoperator.comp_mono_right phi).comp hd) :=
    Superoperator.comp_omegaSup_right phi d hd
  have hR :
    Superoperator.omegaSup (fun k => Superoperator.comp phi (d k))
      ((Superoperator.comp_mono_right phi).comp hd) =
      Superoperator.omegaSup e he := by
  apply le_antisymm
  * apply Superoperator.omegaSup_le
    intro k
    have hk : Superoperator.comp phi (d k) = e k :=
      (unitHom_app_eq_comp v (d k)).symm
    rw [hk]
    exact Superoperator.le_omegaSup e he k
  * apply Superoperator.omegaSup_le
    intro k
    have hk : e k = Superoperator.comp phi (d k) :=
      unitHom_app_eq_comp v (d k)
    rw [hk]
    exact Superoperator.le_omegaSup
      (fun r => Superoperator.comp phi (d r)) _ k
  -- Both sides of the Hom.ext goal are the Carrier (= Superoperator) values.
  exact (hL.trans (hMid.trans hR))

```

### 4.4.960 Monotonicity of the classical morphism of the precomposition

**Statement.** For superoperator modules  $M, M'$ , a module morphism  $u: \text{fun } f \text{ is monotone.}$

**Proof.** The key step rewrites with the closed term pairing equivalence of a composite, in the left argument and the monotonicity of the unit morphism of the precomposition.

#### Lean 4 source `QLambda/Domain/Presheaf/OmegaEnrichedInstances.lean`

```
theorem classicalHom_precomp_mono {M M' : Module}
  (N : BiorthogonalObject) (u : Hom M' M) :
  Monotone (fun f : Hom M N.module => Hom.comp f u) := by
  intro f g hfg
  change
    UnitHomLE (dayTensor M' (DayNegation.neg N.module))
      (closedPairingEquiv M' N (Hom.comp f u))
      (closedPairingEquiv M' N (Hom.comp g u))
  rw [closedPairingEquiv_comp_left, closedPairingEquiv_comp_left]
  exact unitHom_precomp_mono
    (DayTensor.map u (Hom.id (DayNegation.neg N.module))) hfg
```

### 4.4.961 Classical morphism of the precomposition of an $\omega$ -chain supremum

**Statement.** For superoperator modules  $M, M'$ , a module morphism  $u$ : if  $c$  is monotone, then the composite of the supremum of an  $\omega$ -chain of  $c$  and  $hc$  after  $u$  equals the supremum of an  $\omega$ -chain of  $\text{fun } k \Rightarrow \text{Hom.comp } (c \ k) \ u$  and  $(\text{classicalHom\_precomp\_mono } N \ u) \ . \text{comp } hc$ .

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the closed term pairing equivalence of a composite, in the left argument, the definition of the closed term pairing equivalence and the fact that precomposition preserves pointwise increasing suprema.

#### Lean 4 source `QLambda/Domain/Presheaf/OmegaEnrichedInstances.lean`

```
theorem classicalHom_precomp_omegaSup {M M' : Module}
  (N : BiorthogonalObject)
  (c : Nat -> Hom M N.module) (hc : Monotone c) (u : Hom M' M) :
  Hom.comp (QLambda.Domain.OmegaComplete.?Sup c hc) u =
  QLambda.Domain.OmegaComplete.?Sup
    (fun k => Hom.comp (c k) u)
    ((classicalHom_precomp_mono N u).comp hc) := by
  apply (closedPairingEquiv M' N).injective
  have hpair :
    closedPairingEquiv M N
      (QLambda.Domain.OmegaComplete.?Sup c hc) =
    QLambda.Domain.OmegaComplete.?Sup
      (fun k => closedPairingEquiv M N (c k))
      (classicalHom_paired_mono hc) :=
    Equiv.apply_symm_apply (closedPairingEquiv M N) _
  have hpair' :
    closedPairingEquiv M' N
      (QLambda.Domain.OmegaComplete.?Sup
        (fun k => Hom.comp (c k) u)
        ((classicalHom_precomp_mono N u).comp hc)) =
    QLambda.Domain.OmegaComplete.?Sup
      (fun k => closedPairingEquiv M' N (Hom.comp (c k) u))
      (classicalHom_paired_mono
        ((classicalHom_precomp_mono N u).comp hc)) :=
    Equiv.apply_symm_apply (closedPairingEquiv M' N) _
  rw [closedPairingEquiv_comp_left, hpair, hpair']
```

```

refine (unitHom_precomp_omegaSup
  (fun k => closedPairingEquiv M N (c k))
  (classicalHom_paired_mono hc)
  (DayTensor.map u (Hom.id (DayNegation.neg N.module))))).trans ?_
congr 1
funext k
exact (closedPairingEquiv_comp_left N u (c k)).symm

```

#### 4.4.962 Postcomposition is monotone for the transported classical order

**Statement.** Postcomposition is monotone for the transported classical order. Right naturality of the closed pairing reduces this to precomposition continuity on maps into the tensor unit. Formally: `Monotone fun f.`

**Proof.** The key step rewrites with the closed term pairing equivalence of a composite, in the right argument and the monotonicity of the unit morphism of the precomposition.

#### Lean 4 source `QLambda/Domain/Presheaf/OmegaEnrichedInstances.lean`

```

theorem classicalHom_postcomp_mono {M : Module}
  {N N' : BiorthogonalObject} (v : Hom N.module N'.module) :
  Monotone (fun f : Hom M N.module => Hom.comp v f) := by
  intro f g hfg
  change
    UnitHomLE (dayTensor M (DayNegation.neg N'.module))
      (closedPairingEquiv M N' (Hom.comp v f))
      (closedPairingEquiv M N' (Hom.comp v g))
  rw [closedPairingEquiv_comp_right, closedPairingEquiv_comp_right]
  exact unitHom_precomp_mono
    (DayTensor.map (Hom.id M) (DayNegation.map v)) hfg

```

#### 4.4.963 Postcomposition preserves $\omega$ -suprema of classical homs

**Statement.** Postcomposition preserves  $\omega$ -suprema of classical homs.

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the closed term pairing equivalence of a composite, in the right argument, the definition of the closed term pairing equivalence and the fact that precomposition preserves pointwise increasing suprema.

#### Lean 4 source `QLambda/Domain/Presheaf/OmegaEnrichedInstances.lean`

```

theorem classicalHom_postcomp_omegaSup {M : Module}
  {N N' : BiorthogonalObject} (v : Hom N.module N'.module)
  (c : Nat -> Hom M N.module) (hc : Monotone c) :
  Hom.comp v (QLambda.Domain.OmegaComplete.?Sup c hc) =
    QLambda.Domain.OmegaComplete.?Sup
      (fun k => Hom.comp v (c k))
  ((classicalHom_postcomp_mono (N := N) (N' := N') v).comp hc) := by
  apply (closedPairingEquiv M N').injective
  have hpair :
    closedPairingEquiv M N
      (QLambda.Domain.OmegaComplete.?Sup c hc) =
      QLambda.Domain.OmegaComplete.?Sup
        (fun k => closedPairingEquiv M N (c k))

```

```

      (classicalHom_paired_mono hc) :=
    Equiv.apply_symm_apply (closedPairingEquiv M N) _
  have hpair' :
    closedPairingEquiv M N'
      (QLambda.Domain.OmegaComplete.?Sup
        (fun k => Hom.comp v (c k))
        ((classicalHom_postcomp_mono (N := N) (N' := N') v).comp hc)) =
    QLambda.Domain.OmegaComplete.?Sup
      (fun k => closedPairingEquiv M N' (Hom.comp v (c k)))
      (classicalHom_paired_mono
        ((classicalHom_postcomp_mono (N := N) (N' := N') v).comp
          hc)) :=
    Equiv.apply_symm_apply (closedPairingEquiv M N') _
  rw [closedPairingEquiv_comp_right, hpair, hpair']
  refine (unitHom_precomp_omegaSup
    (fun k => closedPairingEquiv M N (c k))
    (classicalHom_paired_mono hc)
    (DayTensor.map (Hom.id M) (DayNegation.map v))).trans ?_
  congr 1
  funext k
  exact (closedPairingEquiv_comp_right v (c k)).symm

```

#### 4.4.964 Day-biorthogonal classical objects form an $\omega$ CPO-enriched category

**Definition.** Day-biorthogonal classical objects form an  $\omega$ CPO-enriched category.

**Construction.** Constructed by supplying each component: obj, partial order,  $\omega$ -completeness, identity, composition, composite monotonicity left, composite monotonicity right and composite supremum of an  $\omega$ -chain left, among others. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/Presheaf/OmegaEnrichedInstances.lean](#)

```

noncomputable def biorthogonalOmegaCategory :
  QLambda.Domain.OmegaCategory where
  Obj := ClassicalObject DayNegation.data
  hom A B :=
    { Carrier := ClassicalObject.Hom A B
      partialOrder := biorthogonalHomPartialOrder A B
      omegaComplete := biorthogonalHomOmegaComplete A B }
  id := ClassicalObject.id _
  comp := ClassicalObject.comp
  comp_mono_left := fun { _ _ C } g =>
    classicalHom_precomp_mono C g
  comp_mono_right := fun { _ B C } f =>
    classicalHom_postcomp_mono (N := B) (N' := C) f
  comp_?Sup_left := fun { _ _ C } c hc g =>
    classicalHom_precomp_omegaSup C c hc g
  comp_?Sup_right := fun { _ B C } f c hc =>
    classicalHom_postcomp_omegaSup (N := B) (N' := C) f c hc
  id_comp := ClassicalObject.id_comp
  comp_id := ClassicalObject.comp_id
  assoc := fun h g f => (ClassicalObject.comp_assoc h g f).symm

```

#### 4.4.965 Finite dimensions and TNI superoperators, enriched over pointed $\omega$ CPOs by Choi refinement

**Definition.** Finite dimensions and TNI superoperators, enriched over pointed  $\omega$ CPOs by Choi refinement.

**Construction.** Constructed by supplying each component: obj, partial order,  $\omega$ -completeness, identity, composition, composite monotonicity left, composite monotonicity right and composite supremum of an  $\omega$ -chain left, among others. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/Presheaf/OmegaEnrichedInstances.lean](#)

```
noncomputable def superoperatorOmegaCategory :
  QLambda.Domain.OmegaCategory where
  Obj := Nat
  hom n m :=
    { Carrier := Superoperator n m
      partialOrder := inferInstance
      omegaComplete := inferInstance }
  id := Superoperator.identity _
  comp := Superoperator.comp
  comp_mono_left := Superoperator.comp_mono_left
  comp_mono_right := Superoperator.comp_mono_right
  comp_?Sup_left := Superoperator.comp_omegaSup_left
  comp_?Sup_right := Superoperator.comp_omegaSup_right
  id_comp := Superoperator.identity_comp
  comp_id := Superoperator.comp_identity
  assoc := fun h g f => (Superoperator.comp_assoc h g f).symm
```

#### 4.4.966 Orthogonality is an optional strengthening of a pseudo-representable basis; it does not imply diagonal normalization

**Definition.** Orthogonality is an optional strengthening of a pseudo-representable basis; it does not imply diagonal normalization.

**Construction.** An element consists of basis, subject to the laws orthogonal.

**Lean 4 source** [QLambda/Domain/Presheaf/OrthogonalPseudoBasis.lean](#)

```
structure OrthogonalPseudoBasis (M : Module.{u}) where
  basis : PseudoBasis M
  orthogonal :
    forall i j, i != j ->
      Hom.comp (basis.bra i) (basis.ket j) = 0
```

#### 4.4.967 A genuine relational partial countable-sum algebra

**Definition.** A genuine relational partial countable-sum algebra. The associativity field is an Iff, corresponding to Kleene equality of the nested and flattened partial expressions.

**Construction.** An element consists of HasSum, unique, singleton, remove\_zero, reindex and flatten, subject to the laws empty.

**Lean 4 source** [QLambda/Domain/Presheaf/PartialCountableSum.lean](#)



```

structure PartialCountableSum (a : Type u) [Zero a] where
  HasSum : {? : Type} -> [Countable ?] -> (? -> a) -> a -> Prop
  unique : forall {? : Type} [Countable ?] {f : ? -> a} {a b : a},
    HasSum f a -> HasSum f b -> a = b
  empty : HasSum (fun i : Empty => nomatch i) 0
  singleton : forall (a : a), HasSum (fun _ : PUnit => a) a
  remove_zero : forall {? : Type} [Countable ?] (f : ? -> a)
    (s : Set ?) (a : a), (forall i, i notin s -> f i = 0) ->
      (HasSum (fun i : s => f i) a <=> HasSum f a)
  reindex : forall {? ? : Type} [Countable ?] [Countable ?]
    (e : ? ? ?) (f : ? -> a) (a : a),
      HasSum (f comp e) a <=> HasSum f a
  flatten : forall {? : Type} [Countable ?] {? : ? -> Type}
    [forall i, Countable (? i)] (f : (i : ?) -> ? i -> a) (a : a),
      (HasSum (fun p : Sigma i, ? i => f p.1 p.2) a <=>
        exists g : ? -> a, (forall i, HasSum (f i) (g i)) /\ HasSum g a)

```

#### 4.4.968 A countable generalized basis whose coefficient objects are pseudo-representable modules

**Definition.** A countable generalized basis whose coefficient objects are pseudo-representable modules.

**Construction.** An element consists of `Index`, `countableIndex`, `coeff`, `ket` and `bra`, subject to the laws `resolves`.

**Lean 4 source** [QLambda/Domain/Presheaf/PseudoBasis.lean](#)

```

structure PseudoBasis (M : Module.{u}) where
  Index : Type
  countableIndex : Countable Index
  coeff : Index -> PseudoRepresentable.{u}
  ket : forall i, Hom (coeff i).module M
  bra : forall i, Hom M (coeff i).module
  resolves :
    Hom.HasSum
      (fun i : Index => Hom.comp (ket i) (bra i))
      (Hom.id M)

```

#### 4.4.969 A positive-dimensional representable has the canonical one-coordinate pseudo-basis

**Definition.** A positive-dimensional representable has the canonical one-coordinate pseudo-basis. This is the basic source constructor required by the biorthogonal presentation; unlike the unrestricted `Basis` wrapper, its coefficient carries the hereditary and bounded pseudo-representability witnesses.

**Construction.** Constructed by supplying each component: `index`, `countable index`, `coefficient`, `ket`, `bra` and `resolves`. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/Presheaf/PseudoBasis.lean](#)

```

noncomputable def representablePseudoBasis (A : Nat) (hA : 0 < A) :
  PseudoBasis (representable A) where
  Index := PUnit
  countableIndex := inferInstance
  coeff := fun _ => PseudoRepresentable.representable A hA
  ket := fun _ => Hom.id _

```

```

bra := fun _ => Hom.id _
resolves := by
  have h := Hom.hasSum_singleton (Hom.id (representable A))
  convert h using 1
  funext i
  apply Hom.ext
  intro n x
  rfl

```

#### 4.4.970 Matrix coefficient of a module morphism between based modules

**Definition.** Matrix coefficient of a module morphism between based modules.

**Construction.** Defined to be the composite of the bra of  $j$  after the composite of  $f$  after  $bM.ket\ i$ .

**Lean 4 source** [QLambda/Domain/Presheaf/PseudoBasis.lean](#)

```

def coefficient {M N : Module.{u}} (bM : PseudoBasis M)
  (bN : PseudoBasis N) (f : Hom M N)
  (i : bM.Index) (j : bN.Index) :
  Hom (bM.coeff i).module (bN.coeff j).module :=
  Hom.comp (bN.bra j) (Hom.comp f (bM.ket i))

```

#### 4.4.971 The rank-one module map induced by one matrix entry

**Definition.** The rank-one module map induced by one matrix entry.

**Construction.** Defined to be the composite of the ket of  $p.2$  after the composite of entry  $p.1\ p.2$  after  $bM.bra\ p.1$ .

**Lean 4 source** [QLambda/Domain/Presheaf/PseudoBasis.lean](#)

```

def matrixTerm {M N : Module.{u}} (bM : PseudoBasis M)
  (bN : PseudoBasis N)
  (entry : forall i j,
    Hom (bM.coeff i).module (bN.coeff j).module)
  (p : Sigma _ : bM.Index, bN.Index) : Hom M N :=
  Hom.comp (bN.ket p.2)
    (Hom.comp (entry p.1 p.2) (bM.bra p.1))

```

#### 4.4.972 A module exhibited as a hereditary

**Definition.** A module exhibited as a hereditary, uniformly bounded submodule of unrestricted completely positive maps into one finite-dimensional object.

**Construction.** An element consists of module, dimension, embed, embed\_injective, embed\_act, embed\_sum, bound and bounded, subject to the laws dimension\_pos, embed\_zero, hereditary, bound\_pos and radius\_pos.

**Lean 4 source** [QLambda/Domain/Presheaf/PseudoRepresentable.lean](#)

```

structure PseudoRepresentable where
  module : Module.{u}
  dimension : Nat
  dimension_pos : 0 < dimension
  embed :
    forall n, (module.obj n).Carrier -> CPMMap n dimension
  embed_injective :
    forall n, Function.Injective (embed n)
  embed_zero :
    forall n, embed n 0 = 0
  embed_act :
    forall {m n} (x : (module.obj n).Carrier)
      (f : Superoperator m n),
      embed m (module.act x f) =
        CPMMap.comp (embed n x) f.cp
  embed_sum :
    forall {? : Type} [Countable ?] {n}
      {f : ? -> (module.obj n).Carrier} {x : (module.obj n).Carrier},
      (module.obj n).HasSum f x ->
        _root_.HasSum (fun i => (embed n (f i)).choi)
          (embed n x).choi
  hereditary :
    forall {n} (x : (module.obj n).Carrier) (? : CPMMap n dimension),
      ? <= embed n x ->
        exists y : (module.obj n).Carrier, embed n y = ?
  bound : NNReal
  bound_pos : 0 < bound
  bounded :
    forall n (x : (module.obj n).Carrier),
      (embed n x).effect <=
        (bound : ?) * (1 : Matrix (Fin n) (Fin n) ?)
  radius : NNReal
  radius_pos : 0 < radius
  pseudoUniversal :
    exists x : (module.obj dimension).Carrier,
      embed dimension x = radius * CPMMap.identity dimension

```

#### 4.4.973 The exhibited inclusion into the ambient unrestricted CPM module

**Definition.** The exhibited inclusion into the ambient unrestricted CPM module.

**Construction.** Constructed by supplying each component: application, functorial action zero, functorial action sum and naturality. The accompanying laws are verified from the definitions.

#### Lean 4 source `QLambda/Domain/Presheaf/PseudoRepresentable.lean`

```

def toAmbient (L : PseudoRepresentable.{u}) :
  Hom L.module (cpmModule L.dimension) where
  app := L.embed
  map_zero := L.embed_zero
  map_sum := fun h => L.embed_sum h
  naturality := by
    intro m n x f
    exact L.embed_act x f

```

#### 4.4.974 Injectivity of the passage to ambient

**Statement.** For a natural number  $n$ :  $(L.toAmbient).app\ n$  is injective.

**Proof.** The proof term combines the facts named in it directly.

#### Lean 4 source `QLambda/Domain/Presheaf/PseudoRepresentable.lean`

```
theorem toAmbient_injective (L : PseudoRepresentable.{u}) (n : Nat) :  
  Function.Injective ((L.toAmbient).app n) :=  
  L.embed_injective n
```

#### 4.4.975 The representable $\mathcal{Q}(-, A)$ is pseudo-representable inside $\mathbf{CPMap}(-, A)$

**Definition.** The representable  $\mathcal{Q}(-, A)$  is pseudo-representable inside  $\mathbf{CPMap}(-, A)$ .

**Construction.** Constructed by supplying each component: module, dimension, dimension positivity, embed, embed injectivity, embed zero, embed act and embed sum, among others. The accompanying laws are verified from the definitions.

#### Lean 4 source `QLambda/Domain/Presheaf/PseudoRepresentable.lean`

```
noncomputable def representable (A : Nat) (hA : 0 < A) :  
  PseudoRepresentable where  
  module := SuperoperatorModule.representable A  
  dimension := A  
  dimension_pos := hA  
  embed := fun _ ? => ?.cp  
  embed_injective := by  
    intro n ? ? h  
    exact Superoperator.ext h  
  embed_zero := by  
    intro n  
    rfl  
  embed_act := by  
    intro m n x f  
    exact Superoperator.cp_comp x f  
  embed_sum := by  
    intro ? _ n f x h  
    exact h  
  hereditary := by  
    intro n x ? h  
    exact <Superoperator.ofLE ? x h, rfl>  
  bound := 1  
  bound_pos := zero_lt_one  
  bounded := by  
    intro n x  
    simp using CPMMap.effect_le_one_of_trace_nonincreasing  
    x.cp x.trace_nonincreasing  
  radius := 1  
  radius_pos := zero_lt_one  
  pseudoUniversal := <Superoperator.identity A, by  
    rw [one_smul]  
    rfl>
```

#### 4.4.976 Equality with sum of a single-entry element

**Statement.** For a natural number  $A$ , an index  $v$ :  $v$  equals the single-entry element of  $i$  at  $1$  scaled by  $\sum i : \text{Fin } A, v i$ .

**Proof.** Both sides are compared pointwise (by extensionality). The claim follows from a chain of equalities (or inequalities). The argument splits on the relevant condition. The goal is simplified using standard identities for finite sums, the usual algebraic identities and the sum of a congruence.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/BornDensity.lean](#)

```
theorem eq_sum_single {A : Nat}
  (v : Fin A -> ?) :
  v = ? i : Fin A, v i * Pi.single i (1 : ?) := by
  ext j
  simp only [Finset.sum_apply, Pi.smul_apply, Pi.single_apply, smul_eq_mul]
  classical
  -- goal: v j = ? i, v i * (if j = i then 1 else 0)
  symm
  calc ? i : Fin A, v i * (if j = i then (1 : ?) else 0)
    = ? i : Fin A, if j = i then v i else 0 := by
      refine Finset.sum_congr rfl fun i _ => ?_
      split_ifs <|> simp
  _ = v j := by simp [Finset.sum_ite_eq]
```

#### 4.4.977 Sum of the positive semidefinite of the matrix

**Statement.** For a natural number  $A$ : if for every  $i, \in, s, M$   $i$  is positive semidefinite, then  $\sum i \in s, M$   $i$  is positive semidefinite.

**Proof.** The argument proceeds by induction. The key step rewrites with standard identities for finite sums, the definition of the zero and the hypothesis that for every  $i, \in, s, M$   $i$  is positive semidefinite.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/BornDensity.lean](#)

```
theorem sum_psd_matrix {A : Nat} {? : Type*}
  (s : Finset ?) (M : ? -> Matrix (Fin A) (Fin A) ?)
  (h : forall i in s, (M i).PosSemidef) :
  (? i in s, M i).PosSemidef := by
  classical
  induction s using Finset.induction_on with
  | empty =>
    simp only [Finset.sum_empty]
    exact PosSemidef.zero
  | insert i s hs ih =>
    rw [Finset.sum_insert hs]
    exact (h i (Finset.mem_insert_self _ _)).add
      (ih fun j hj => h j (Finset.mem_insert_of_mem hj))
```

#### 4.4.978 The construction is at most one, assuming addition of the order of one and assuming positive semidefiniteness

**Statement.** For a natural number  $A$ , matrixes  $P, S$ : if  $P$  is positive semidefinite and  $P + S \leq 1$ , then  $S \leq 1$ .

**Proof.** The key step rewrites with the characterization of the order for subnormalized density matrices and the hypothesis that  $P + S \leq 1$ .

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/BornDensity.lean](#)

```
theorem le_one_of_add_le_one_of_posSemidef {A : Nat}
  (P S : Matrix (Fin A) (Fin A) ?) (hP : P.PosSemidef) (hle : P + S <= 1) :
  S <= 1 := by
  rw [Matrix.le_iff] at hle |-
  have : (1 : Matrix (Fin A) (Fin A) ?) - S = (1 - (P + S)) + P := by
    abel
  rw [this]
  exact hle.add hP
```

#### 4.4.979 The sum of the rank one equals one

**Statement.** For a natural number  $A$ :  $\sum i : \text{Fin } A, \text{Matrix.vecMulVec } (\text{Pi.single } i \ 1) \ (\text{star } (\text{Pi.single } i \ 1))$  equals  $1 : \text{Matrix } (\text{Fin } A) \ (\text{Fin } A) \ \mathbb{C}$ .

**Proof.** Both sides are compared pointwise (by extensionality). The argument splits on the relevant condition. An equation between variables is used to substitute one for the other. The key step rewrites with standard identities for matrices and standard identities for finite sums.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/BornDensity.lean](#)

```
theorem sum_rankOne_eq_one {A : Nat} :
  (? i : Fin A, Matrix.vecMulVec (Pi.single i (1 : ?))
    (star (Pi.single i (1 : ?)))) = (1 : Matrix (Fin A) (Fin A) ?) := by
  ext a b
  simp only [Matrix.one_apply, Matrix.sum_apply, Matrix.vecMulVec_apply,
    Pi.star_apply, Pi.single_apply]
  classical
  by_cases hab : a = b
  * subst hab
  have : forall i, (if a = i then (1 : ?) else 0) * star (if a = i then (1 : ?)
    else 0) =
    if a = i then 1 else 0 := by
    intro i; split_ifs <=> simp
  simp_rw [this, Finset.sum_ite_eq]
  simp
  * have h : forall i, (if a = i then (1 : ?) else 0) * star (if b = i then (1 : ?)
    else 0) = 0 := by
    intro i
    by_cases hai : a = i
    * have hbi : b != i := fun h => hab (hai.trans h.symm)
      simp [hai, hbi]
    * simp [hai]
  simp_rw [h, Finset.sum_const_zero]
  simp [hab]
```

#### 4.4.980 Single-entry element of the squared norm of one

**Statement.** For a natural number  $A$ , an index  $i$ :  $\text{star } (\text{Pi.single } i \ 1) \cdot \text{Pi.single } i \ 1 = 1$ .

**Proof.** The claim follows from a chain of equalities (or inequalities). The argument splits on the relevant condition. The goal is simplified using the sum of a congruence.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/BornDensity.lean](#)

```
theorem single_normSq_one {A : Nat} (i : Fin A) :
  star (Pi.single i (1 : ?)) ?? Pi.single i (1 : ?) = 1 := by
  simp only [dotProduct, Pi.single_apply, Pi.star_apply]
  classical
  calc ? x : Fin A, star (if x = i then (1 : ?) else 0) * (if x = i then 1 else 0)
    = ? x : Fin A, if x = i then (1 : ?) else 0 := by
      refine Finset.sum_congr rfl fun x _ => ?_
      split_ifs <;> simp
    _ = 1 := by simp
```

#### 4.4.981 Effect expectation of a finite sum of the rank one

**Statement.** For a natural number  $A$ : an explicit expression in the effect expectation, the double dual effect pairing, the outer product and the single-entry element equals the effect expectation.

**Proof.** The argument proceeds by induction. The key step rewrites with standard identities for finite sums, the fact that double-dual Born reading is additive on Loewner-summable effects, the fact that the sum of the rank one equals one and the definition of the effect expectation.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/BornDensity.lean](#)

```
theorem effectExpectation_sum_rankOne {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier) :
  (? i : Fin A, effectExpectation (doubleDualEffectPairing F)
    (Matrix.vecMulVec (Pi.single i (1 : ?)) (star (Pi.single i (1 : ?))))
    (Matrix.posSemidef_vecMulVec_self_star _)
    (vecMulVec_unit_le_one _ (single_normSq_one i))) =
  effectExpectation (doubleDualEffectPairing F)
    (1 : Matrix (Fin A) (Fin A) ?) PosSemidef.one le_rfl := by
  classical
  have hadd : forall (s : Finset (Fin A))
    (hle : (? i in s, Matrix.vecMulVec (Pi.single i (1 : ?))
      (star (Pi.single i (1 : ?)))) <= (1 : Matrix (Fin A) (Fin A) ?)),
    effectExpectation (doubleDualEffectPairing F)
      (? i in s, Matrix.vecMulVec (Pi.single i (1 : ?))
        (star (Pi.single i (1 : ?))))
      (sum_psd_matrix s _ (fun i _ => Matrix.posSemidef_vecMulVec_self_star _))
    hle =
    ? i in s, effectExpectation (doubleDualEffectPairing F)
      (Matrix.vecMulVec (Pi.single i (1 : ?)) (star (Pi.single i (1 : ?))))
      (Matrix.posSemidef_vecMulVec_self_star _)
      (vecMulVec_unit_le_one _ (single_normSq_one i)) := by
  intro s
  induction s using Finset.induction_on with
  | empty =>
```

```

intro hle
simp only [Finset.sum_empty]
exact effectExpectation_zero_doubleDual F
| insert i s hs ih =>
intro hle
simp only [Finset.sum_insert hs] at hle | -
have hE := Matrix.posSemidef_vecMulVec_self_star (Pi.single i (1 : ?))
have hS := sum_psd_matrix s (fun j => Matrix.vecMulVec (Pi.single j (1 : ?))
  (star (Pi.single j (1 : ?))))
  (fun j _ => Matrix.posSemidef_vecMulVec_self_star _)
have hEle : Matrix.vecMulVec (Pi.single i (1 : ?))
  (star (Pi.single i (1 : ?))) <= (1 : Matrix (Fin A) (Fin A) ?) :=
  vecMulVec_unit_le_one _ (single_normSq_one i)
have hSle := le_one_of_add_le_one_of_posSemidef _ _ hE hle
rw [effectExpectation_add_doubleDual F _ _ hE hS hEle hSle hle, ih hSle]
have huniv_le : (? i : Fin A, Matrix.vecMulVec (Pi.single i (1 : ?))
  (star (Pi.single i (1 : ?)))) <= (1 : Matrix (Fin A) (Fin A) ?) := by
  rw [sum_rankOne_eq_one]
have h := hadd Finset.univ huniv_le
have hb :
  effectExpectation (doubleDualEffectPairing F)
    (? i : Fin A, Matrix.vecMulVec (Pi.single i (1 : ?))
      (star (Pi.single i (1 : ?))))
    (sum_psd_matrix Finset.univ _ (fun i _ => Matrix.
      posSemidef_vecMulVec_self_star _))
    huniv_le =
    effectExpectation (doubleDualEffectPairing F)
      (1 : Matrix (Fin A) (Fin A) ?) PosSemidef.one le_rfl := by
  simp only [effectExpectation, sum_rankOne_eq_one]
exact hb |> h.symm

```

#### 4.4.982 The trace of the density matrix is at most one

**Statement.** For a natural number A:  $(\text{tr } (\text{densityFromEffectPairing } (\text{doubleDualEffectPairing } F))).\text{re} \leq 1$ .

**Proof.** The claim follows from a chain of equalities (or inequalities). The key step rewrites with the definition of the density matrix from effect pairing, the definition of the effect expectation, the sum of a congruence and the polarised effect pairing of itself.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/BornDensity.lean](#)

```

theorem trace_density_le_one {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier) :
  (Matrix.trace (densityFromEffectPairing (doubleDualEffectPairing F))).re <= 1 :=
  by
  set ? := densityFromEffectPairing (doubleDualEffectPairing F)
  have htr : Matrix.trace ? =
    ? i : Fin A, effectPairingQuad (doubleDualEffectPairing F)
      (Pi.single i (1 : ?)) := by
  change ? i, ? i i = ? i, effectPairingQuad (doubleDualEffectPairing F) (Pi.single
    i 1)
  refine Finset.sum_congr rfl fun i _ => ?_
  simp only [?, densityFromEffectPairing]
  exact effectPairingPolar_self (doubleDualEffectPairing F) (Pi.single i 1)

```



```

have hQ : forall i, effectPairingQuad (doubleDualEffectPairing F) (Pi.single i (1 : ?)) =
  effectExpectation (doubleDualEffectPairing F)
    (Matrix.vecMulVec (Pi.single i (1 : ?)) (star (Pi.single i (1 : ?))))
    (Matrix.posSemidef_vecMulVec_self_star _)
    (vecMulVec_unit_le_one _ (single_normSq_one i)) := by
  intro i
  exact effectPairingQuad_eq_expectation F (Pi.single i (1 : ?))
    (vecMulVec_unit_le_one _ (single_normSq_one i))
have hsum := effectExpectation_sum_rankOne F
have hborn := bornScalar_nonneg
  (doubleDualEffectPairing F (ofEffect (1 : Matrix (Fin A) (Fin A) ?)
    PosSemidef.one le_rfl))
calc (Matrix.trace ?).re
  = (? i, effectPairingQuad (doubleDualEffectPairing F)
    (Pi.single i (1 : ?))).re := by rw [htr]
_ = (effectExpectation (doubleDualEffectPairing F) 1 PosSemidef.one le_rfl).re :=
  by
    simp_rw [hQ]; exact congrArg Complex.re hsum
_ <= 1 := by simp [effectExpectation] using hborn.2.2

```

#### 4.4.983 Polarised effect pairing of the basis of the expansion

**Statement.** For a natural number  $A$ , indexes  $v, w$ : the polarised effect pairing of the double dual effect pairing of  $F$ ,  $v, w$  equals an explicit expression in the adjoint, the polarised effect pairing, the double dual effect pairing and the single-entry element.

**Proof.** The key step rewrites with the equality with sum of a single-entry element, the polarised effect pairing of a finite sum, in the right argument, distributivity of multiplication over finite sums and associativity of multiplication.

#### Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/BornDensity.lean`

```

theorem effectPairingPolar_basis_expansion {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (v w : Fin A -> ?) :
  effectPairingPolar (doubleDualEffectPairing F) v w =
    ? i : Fin A, ? j : Fin A,
      star (v i) * effectPairingPolar (doubleDualEffectPairing F)
        (Pi.single i (1 : ?)) (Pi.single j (1 : ?)) * w j := by
have step1 : effectPairingPolar (doubleDualEffectPairing F) v w =
  ? i : Fin A, star (v i) *
    effectPairingPolar (doubleDualEffectPairing F) (Pi.single i (1 : ?)) w := by
  conv_lhs => rw [eq_sum_single v]
  exact effectPairingPolar_sum_left F Finset.univ v w
have step2 : effectPairingPolar (doubleDualEffectPairing F) v w =
  ? i : Fin A, star (v i) *
    (? j : Fin A, w j *
      effectPairingPolar (doubleDualEffectPairing F)
        (Pi.single i (1 : ?)) (Pi.single j (1 : ?))) := by
  rw [step1]
  refine Finset.sum_congr rfl fun i _ => ?_
  conv_lhs => rw [eq_sum_single w]
  rw [effectPairingPolar_sum_right]
  rw [step2]

```

```

refine Finset.sum_congr rfl fun i _ => ?_
rw [Finset.mul_sum]
refine Finset.sum_congr rfl fun j _ => ?_
rw [ <- mul_assoc, mul_right_comm (star (v i)) (w j)]

```

#### 4.4.984 Formula for the density matrix of the quad

**Statement.** For a natural number  $A$ , an index  $v$ :  $\text{star } v \cdot (\text{densityFromEffectPairing } (\text{doubleDualEffectPairing } F)) *_{\mathbf{v}} v$  equals the quadratic effect pairing of the double dual effect pairing of  $F$  and  $v$ .

**Proof.** The key step rewrites with associativity of multiplication, the polarised effect pairing of itself, the polarised effect pairing of the basis of the expansion and the definition of the density matrix from effect pairing.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/BornDensity.lean](#)

```

theorem density_quad_eq {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (v : Fin A -> ?) :
  star v ?? (densityFromEffectPairing (doubleDualEffectPairing F)) *? v =
    effectPairingQuad (doubleDualEffectPairing F) v := by
  set ? := densityFromEffectPairing (doubleDualEffectPairing F)
  have hdot : star v ?? ? *? v =
    ? i : Fin A, ? j : Fin A, star (v i) * ? i j * v j := by
  simp only [dotProduct, mulVec, Pi.star_apply]
  refine Eq.trans (Finset.sum_congr rfl fun i _ => Finset.mul_sum _ _ _) ?_
  refine Finset.sum_congr rfl fun i _ => Finset.sum_congr rfl fun j _ => ?_
  rw [mul_assoc]
  rw [hdot, <- effectPairingPolar_self (doubleDualEffectPairing F) v,
    effectPairingPolar_basis_expansion]
  refine Finset.sum_congr rfl fun i _ => Finset.sum_congr rfl fun j _ => ?_
  simp only [?, densityFromEffectPairing]

```

#### 4.4.985 Self-adjointness of the density matrix from double dual

**Statement.** For a natural number  $A$ : the object is self-adjoint. Formally:  $(\text{densityFromEffectPairing } (\text{doubleDualEffectPairing } F)).\text{IsHermitian}$ .

**Proof.** Both sides are compared pointwise (by extensionality). The goal is simplified using the definition of the density matrix from effect pairing and the symmetry of the polarised effect pairing of the complex conjugate.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/BornDensity.lean](#)

```

theorem densityFromDoubleDual_isHermitian {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier) :
  (densityFromEffectPairing (doubleDualEffectPairing F)).IsHermitian := by
  ext i j
  simp only [conjTranspose_apply, densityFromEffectPairing]
  exact effectPairingPolar_conj_symm F (Pi.single i (1 : ?)) (Pi.single j (1 : ?))

```

#### 4.4.986 Positive semidefiniteness of the density matrix from double dual

**Statement.** For a natural number  $A$ : the object is positive semidefinite.

**Proof.** The key step rewrites with the formula for the density matrix of the quad, standard identities for matrices and standard identities for complex numbers.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornDensity.lean`

```
theorem densityFromDoubleDual_posSemidef {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier) :
  (densityFromEffectPairing (doubleDualEffectPairing F)).PosSemidef := by
  refine Matrix.PosSemidef.of_dotProduct_mulVec_nonneg
    (densityFromDoubleDual_isHermitian F) ?_
  intro v
  have hq := effectPairingQuad_nonneg (doubleDualEffectPairing F) v
  rw [density_quad_eq F v]
  exact Complex.nonneg_iff.mpr <hq.1, hq.2.symm>

/-! ### Spectral expansion for Born match -/
```

#### 4.4.987 Spectral expansion for Born match

**Statement.** `###` Spectral expansion for Born match. Formally:  $\text{diagonal } f = \sum i : n, f \ i \cdot \text{Matrix.single } i \ i \ 1$ .

**Proof.** Both sides are compared pointwise (by extensionality). The argument splits on the relevant condition. The hypotheses are unpacked into their constituent data. The key step rewrites with standard identities for matrices, the usual algebraic identities, the definition of the single-entry element and the symmetry for semantic equalities of circuits.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornDensity.lean`

```
theorem diagonal_eq_sum_single {n : Type*} [Fintype n] [DecidableEq n] (f : n -> ?)
  :
  diagonal f = ? i : n, f i * Matrix.single i i (1 : ?) := by
  ext a b
  classical
  simp only [diagonal, Matrix.sum_apply, Matrix.smul_apply, smul_eq_mul,
    Matrix.single, Matrix.of_apply]
  refine Eq.symm ?_
  by_cases hab : a = b
  * rw [ite_eq_left hab]
    cases hab
    have hterm : forall i, f i * (if i = a /\ i = a then (1 : ?) else 0) =
      if i = a then f a else 0 := by
      intro i; split_ifs <;> simp_all
    simp_rw [hterm]
    simp
  * rw [ite_eq_right hab]
    refine Finset.sum_eq_zero fun i _ => ?_
    have : not (i = a /\ i = b) := fun <ha, hb> => hab (ha.symm.trans hb)
    simp [this]
```

#### 4.4.988 Entry of a product of a single-entry element

**Statement.** For a matrix  $U$ :  $(U * \text{Matrix.single } i \ i \ 1) \ a \ j = \text{if } j = i \text{ then } U \ a \ i \text{ else } 0$ .

**Proof.** Each component of the claim is established separately. The argument splits on the relevant condition. The key step rewrites with standard identities for matrices, the definition of the single-entry element, the fact that observational equality is symmetric and standard identities for finite sums.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/BornDensity.lean](#)

```
theorem entry_mul_single {n : Type*} [Fintype n] [DecidableEq n]
  (U : Matrix n n ?) (i : n) (a j : n) :
  (U * Matrix.single i i (1 : ?)) a j = if j = i then U a i else 0 := by
  classical
  simp only [Matrix.mul_apply, Matrix.single, Matrix.of_apply]
  split_ifs with hj
  * have hif : forall k, (i = k /\ i = j) <=> k = i := by
    intro k; constructor
    * intro <h1, _>; exact h1.symm
    * intro hk; exact <hk.symm, hj.symm>
  simp_rw [hif]
  have hterm : forall k, U a k * (if k = i then (1 : ?) else 0) =
    if k = i then U a i else 0 := by
    intro k; split_ifs <;> simp_all
  simp_rw [hterm]
  simp
  * refine Finset.sum_eq_zero fun k _ => ?_
  have : not (i = k /\ i = j) := fun <_, h2> => hj h2.symm
  simp [this]
```

#### 4.4.989 The multiplication single-entry element multiplication adjoint

**Statement.** For a matrix  $U$ :  $U * \text{Matrix.single } i \ i \ 1 * \text{star } U$  equals the outer product of  $\text{fun } a \Rightarrow U \ a \ i$  and  $\text{fun } b \Rightarrow \text{star } (U \ b \ i)$ .

**Proof.** Both sides are compared pointwise (by extensionality). The argument splits on the relevant condition. The key step rewrites with standard identities for matrices.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/BornDensity.lean](#)

```
theorem mul_single_mul_star {n : Type*} [Fintype n] [DecidableEq n]
  (U : Matrix n n ?) (i : n) :
  U * Matrix.single i i (1 : ?) * star U =
  Matrix.vecMulVec (fun a => U a i) (fun b => star (U b i)) := by
  classical
  set M := U * Matrix.single i i (1 : ?)
  have hM (a j : n) : M a j = if j = i then U a i else 0 := entry_mul_single U i a j
  ext a b
  simp only [Matrix.vecMulVec_apply, Matrix.mul_apply, star_apply]
  have hterm : forall j, M a j * star (U b j) =
    if j = i then U a i * star (U b i) else 0 := by
    intro j
    rw [hM]
  split_ifs with hj <;> simp [hj]
```

```
simp_rw [hterm]
simp
```

#### 4.4.990 The self-adjointness equals the sum of the eigenprojectors

**Statement.** For a matrix  $E$ : if  $E$  is self-adjoint, then  $E$  equals the outer product of  $\text{fun } a \Rightarrow \uparrow hE.\text{eigenvectorUnitary } a \ i$  and  $\text{fun } b \Rightarrow \text{star } (\uparrow hE.\text{eigenvectorUnitary } b \ i)$  scaled by  $\sum i : n, hE.\text{eigenvalues } i$ .

**Proof.** Both sides are compared pointwise (by extensionality). The claim follows from a chain of equalities (or inequalities). The key step rewrites with the definition of the unrestricted, the definition of the composition, distributivity of multiplication over finite sums and standard identities for matrices.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/BornDensity.lean](#)

```
theorem isHermitian_eq_sum_eigenprojectors {n : Type*} [Fintype n] [DecidableEq n]
  (E : Matrix n n ?) (hE : E.IsHermitian) :
  E = ? i : n, (hE.eigenvalues i : ?) *
    Matrix.vecMulVec
      (fun a => (hE.eigenvectorUnitary : Matrix n n ?) a i)
      (fun b => star ((hE.eigenvectorUnitary : Matrix n n ?) b i)) := by
  set U : Matrix n n ? := hE.eigenvectorUnitary
  have hEUD : E = U * diagonal (RCLike.ofReal comp hE.eigenvalues) * star U := by
    simp [U, Unitary.conjStarAlgAut_apply] using hE.spectral_theorem
  have heq : (RCLike.ofReal comp hE.eigenvalues : n -> ?) = fun i => (hE.
    eigenvalues i : ?) := by
    ext i; simp [Function.comp]
  have hD : diagonal (RCLike.ofReal comp hE.eigenvalues) =
    ? i : n, (hE.eigenvalues i : ?) * Matrix.single i i (1 : ?) := by
    rw [heq]; exact diagonal_eq_sum_single _
  calc E
    = U * diagonal (RCLike.ofReal comp hE.eigenvalues) * star U := hEUD
  _ = U * (? i : n, (hE.eigenvalues i : ?) * Matrix.single i i (1 : ?)) * star U :=
  by
    rw [hD]
  _ = ? i : n, (U * ((hE.eigenvalues i : ?) * Matrix.single i i (1 : ?))) * star U
  := by
    rw [Finset.mul_sum, Finset.sum_mul]
  _ = ? i : n, (((hE.eigenvalues i : ?) * (U * Matrix.single i i (1 : ?))) * star U)
  := by
    refine Finset.sum_congr rfl fun i _ => ?_
    rw [Matrix.mul_smul]
  _ = ? i : n, (hE.eigenvalues i : ?) * ((U * Matrix.single i i (1 : ?)) * star U)
  := by
    refine Finset.sum_congr rfl fun i _ => ?_
    rw [Matrix.smul_mul]
  _ = ? i : n, (hE.eigenvalues i : ?) * (U * Matrix.single i i (1 : ?) * star U) :=
  by
    refine Finset.sum_congr rfl fun i _ => ?_
    simp [Matrix.mul_assoc]
  _ = ? i : n, (hE.eigenvalues i : ?) *
    Matrix.vecMulVec (fun a => U a i) (fun b => star (U b i)) := by
    refine Finset.sum_congr rfl fun i _ => ?_
    rw [mul_single_mul_star]
```

#### 4.4.991 Eigenvector unitarity of the col of the squared norm

**Statement.** For a matrix  $E$ : if  $E$  is self-adjoint, then the adjoint of  $\text{fun } a \Rightarrow \uparrow hE.\text{eigenvectorUnitary } a \text{ } i, \cdot, \text{fun } a \Rightarrow \uparrow hE.\text{eigenvectorUnitary } a \text{ } i$  equals 1.

**Proof.** The goal is simplified using standard identities for matrices.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornDensity.lean`

```
theorem eigenvectorUnitary_col_normSq {n : Type*} [Fintype n] [DecidableEq n]
  (E : Matrix n n ?) (hE : E.IsHermitian) (i : n) :
  star (fun a => (hE.eigenvectorUnitary : Matrix n n ?) a i) ??
  (fun a => (hE.eigenvectorUnitary : Matrix n n ?) a i) = 1 := by
  have hstar : star (hE.eigenvectorUnitary : Matrix n n ?) *
    (hE.eigenvectorUnitary : Matrix n n ?) = 1 :=
  Unitary.coe_star_mul_self hE.eigenvectorUnitary
  have hii : (star (hE.eigenvectorUnitary : Matrix n n ?) *
    (hE.eigenvectorUnitary : Matrix n n ?)) i i = 1 := by
  simp [hstar]
  simpa [Matrix.mul_apply, star_apply, dotProduct] using hii
```

#### 4.4.992 Extension of Born reading off the Loewner interval

**Statement.** ### Extension of Born reading off the Loewner interval. Formally:  $0 \leq \text{tr } (X * Y)$ .

**Proof.** The hypotheses are unpacked into their constituent data. The key step rewrites with associativity of matrix multiplication and the usual algebraic identities.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornExpectationExt.lean`

```
theorem PosSemidef.trace_mul_nonneg {n : Nat}
  (X Y : Matrix (Fin n) (Fin n) ?) (hX : X.PosSemidef) (hY : Y.PosSemidef) :
  0 <= Matrix.trace (X * Y) := by
  classical
  obtain <C, hC> := CStarAlgebra.nonneg_iff_eq_star_mul_self.mp hX.nonneg
  obtain <D, hD> := CStarAlgebra.nonneg_iff_eq_star_mul_self.mp hY.nonneg
  rw [hC, hD]
  change 0 <= Matrix.trace (C? * C * (D? * D))
  have hcycle : Matrix.trace (C? * C * (D? * D)) =
    Matrix.trace ((D * C?)? * (D * C?)) := by
  simp only [Matrix.mul_assoc]
  rw [trace_mul_comm C? (C * (D? * D))]
  simp [conjTranspose_mul, Matrix.mul_assoc]
  rw [hcycle]
  exact (posSemidef_conjTranspose_mul_self (D * C?)).trace_nonneg
```

#### 4.4.993 The positive semidefinite matrix is bounded by real part of the trace of a scalar multiple of one

**Statement.** For a natural number  $A$ , a matrix  $E$ : if  $E$  is positive semidefinite, then  $E \leq ((\text{tr } E).re : \mathbb{R}) \cdot (1 : \text{Matrix } (\text{Fin } A) (\text{Fin } A) \mathbb{C})$ .

**Proof.** Both sides are compared pointwise (by extensionality). The claim follows from a chain of equalities (or inequalities). The argument splits on the relevant condition. The key step rewrites with the

characterization of the order for subnormalized density matrices, the definition of the is self adjoint, standard identities for complex numbers and the usual algebraic identities.

#### Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/BornExpectation` `Ext.lean`

```
theorem PosSemidef.le_re_trace_smul_one {A : Nat}
  (E : Matrix (Fin A) (Fin A) ?) (hE : E.PosSemidef) :
  E <= ((Matrix.trace E).re : ?) * (1 : Matrix (Fin A) (Fin A) ?) := by
  rw [Matrix.le_iff]
  have h1 : IsHermitian (1 : Matrix (Fin A) (Fin A) ?) := isHermitian_one
  have hc : IsSelfAdjoint ((Matrix.trace E).re : ?) := by
    simp [IsSelfAdjoint, Complex.conj_ofReal]
  have hherm := (IsHermitian.smul h1 hc).sub hE.1
  refine PosSemidef.of_dotProduct_mulVec_nonneg hherm fun v => ?_
  have hn := star_dotProduct_self_nonneg_real v
  have hcalc :
    star v ?? (((Matrix.trace E).re : ?) * (1 : Matrix (Fin A) (Fin A) ?) - E) *? v
  ) =
    (Matrix.trace E).re * (star v ?? v) - star v ?? E *? v := by
    simp [sub_mulVec, smul_mulVec, one_mulVec, dotProduct_sub]
  rw [hcalc]
  by_cases hv : star v ?? v = 0
  * have : v = 0 := (dotProduct_star_self_eq_zero).1 hv
    simp [this]
  * set u := normalizeVec v hv
    have hre := hn.1
    have him := hn.2
    set s : ? := (Real.sqrt (star v ?? v).re)
    have hv_eq : v = s * u := by
      simp only [u, normalizeVec, s]
    ext i
    have hs_ne : s != 0 := by
      intro hs0
      have : (star v ?? v).re = 0 :=
        (Real.sqrt_eq_zero hre).1 (by simp [s] using congrArg Complex.re hs0)
      exact hv (Complex.ext this him)
    change v i = s * (s-1 * v i)
    field_simp [hs_ne]
  have hstar_s : star s = s := by simp [s, Complex.conj_ofReal]
  have hnm : star v ?? v = s * s := by
    apply Complex.ext
    * have : (star v ?? v).re = s.re * s.re := by
      simp [s, Complex.ofReal_re] using (Real.mul_self_sqrt hre).symm
      simp [Complex.mul_re, s] using this
    * simp [Complex.mul_im, s] using him
  have hEv' : star v ?? E *? v = (s * s) * (star u ?? E *? u) := by
    calc star v ?? E *? v
      = star (s * u) ?? E *? (s * u) := by rw [hv_eq]
      _ = star s * s * (star u ?? E *? u) := quad_smul E s u
      _ = (s * s) * (star u ?? E *? u) := by rw [hstar_s]
  have hul : star u ?? u = 1 := normalizeVec_norm v hv
  have hP : Matrix.vecMulVec u (star u) <= 1 := vecMulVec_unit_le_one u hul
  have hIPpsd : ((1 : Matrix (Fin A) (Fin A) ?) -
    Matrix.vecMulVec u (star u)).PosSemidef := Matrix.le_iff.mp hP
  have htr_split :
```

```

Matrix.trace E =
  Matrix.trace (E * Matrix.vecMulVec u (star u)) +
  Matrix.trace (E * (1 - Matrix.vecMulVec u (star u))) := by
have : Matrix.vecMulVec u (star u) + (1 - Matrix.vecMulVec u (star u)) = 1 := by
abel
rw [ <- Matrix.trace_add, <- Matrix.mul_add, this, Matrix.mul_one]
have htrIP_nonneg :
  0 <= Matrix.trace (E * (1 - Matrix.vecMulVec u (star u))) :=
  PosSemidef.trace_mul_nonneg E _ hE hIPpsd
have htrP :
  Matrix.trace (E * Matrix.vecMulVec u (star u)) = star u ?? E *? u := by
  simp only [Matrix.trace, diag_apply, mul_apply, vecMulVec_apply, dotProduct,
mulVec]
  refine Finset.sum_congr rfl fun i _ => ?_
  calc ? j, E i j * (u j * star (u i))
    = ? j, star (u i) * (E i j * u j) :=
    Finset.sum_congr rfl fun j _ => by ring
  _ = star (u i) * ? j, E i j * u j := (Finset.mul_sum _ _ _).symm
have himU : (star u ?? E *? u).im = 0 :=
  (Complex.nonneg_iff.mp (hE.dotProduct_mulVec_nonneg u)).2.symm
have hre_bound : (star u ?? E *? u).re <= (Matrix.trace E).re := by
  have hsplit_re := congrArg Complex.re htr_split
  simp only [Complex.add_re] at hsplit_re
  have hnn := (Complex.nonneg_iff.mp htrIP_nonneg).1
  have : (Matrix.trace (E * Matrix.vecMulVec u (star u))).re <= (Matrix.trace E)
.re := by
  linarith
  simp [htrP] using this
have hss_im : (s * s).im = 0 := by simp [ <- hnr] using him
refine Complex.nonneg_iff.mpr <?_, ?_>
* rw [hEv', hnr]
have hex :
  ((Matrix.trace E).re : ?) * (s * s) - (s * s) * (star u ?? E *? u).re =
  (s * s).re * ((Matrix.trace E).re - (star u ?? E *? u).re) := by
  simp [Complex.sub_re, Complex.mul_re, hss_im, himU, Complex.ofReal_im]; ring
rw [hex]
have hss_re0 : 0 <= (s * s).re := by
  have : s * s = star v ?? v := hnr.symm
  simp [ <- this] using hre
nlinarith [hre_bound]
* rw [hEv', hnr]
simp [Complex.sub_im, Complex.mul_im, hss_im, himU, Complex.ofReal_re, Complex.
ofReal_im]

```

#### 4.4.994 The inverse scalar multiplication is at most one, when it is at most the trace of a scalar multiple

**Statement.** For a natural number  $A$ , a matrix  $E$ , a real number  $c$ : if  $E$  is positive semidefinite;  $\max (\text{tr } E).re \leq c$ ; and  $0 < c$ , then  $(c^{-1} \cdot E) \leq (1 : \text{Matrix } (\text{Fin } A) (\text{Fin } A) \mathbb{C})$ .

**Proof.** Both sides are compared pointwise (by extensionality). The argument splits on the relevant condition. The key step rewrites with the characterization of the order for subnormalized density matrices, standard identities for matrices, the fact that observational equality is transitive and the usual algebraic identities.



**Lean 4 source QLambda/Domain/Presheaf/RepresentableBipolar/BornExpectation  
Ext.lean**

```

theorem inv_smul_le_one_of_le_trace_smul {A : Nat}
  (E : Matrix (Fin A) (Fin A) ?) (hE : E.PosSemidef) (c : ?)
  (hc : max (Matrix.trace E).re 1 <= c) (hc0 : 0 < c) :
  ((c^-1 : ?) * E) <= (1 : Matrix (Fin A) (Fin A) ?) := by
  have hE_le := PosSemidef.le_re_trace_smul_one E hE
  have ht_le : (Matrix.trace E).re <= c := (le_max_left _ _).trans hc
  have hE_le' : E <= (c : ?) * (1 : Matrix (Fin A) (Fin A) ?) := by
    refine hE_le.trans ?_
    rw [Matrix.le_iff]
  have : (c : ?) * (1 : Matrix (Fin A) (Fin A) ?) -
    ((Matrix.trace E).re : ?) * 1 = (c - (Matrix.trace E).re) * 1 := by
    ext; simp [Matrix.sub_apply, Matrix.smul_apply]; ring
  rw [this]
  exact (PosSemidef.one).smul (sub_nonneg.mpr ht_le)
  rw [Matrix.le_iff] at hE_le' |-
  have : (1 : Matrix (Fin A) (Fin A) ?) - (c^-1 : ?) * E =
    (c^-1 : ?) * (c * 1 - E) := by
    ext i j
  have hc0' : (c : ?) != 0 := by exact_mod_cast hc0.ne'
  simp [Matrix.sub_apply, Matrix.smul_apply, Matrix.one_apply]
  split_ifs <=> (field_simp [hc0']); try ring
  rw [this]
  exact hE_le'.smul (inv_nonneg.mpr hc0.le)

```

#### 4.4.995 Definition of the effect expectation extensionality

**Definition.** The effect expectation extensionality of  $F$  and  $E$  is a complex number.

**Construction.** Defined to be the product of  $\text{let } c : \mathbb{R} := \max (\text{tr } E).re \ 1 \ c$  and the effect expectation.

**Lean 4 source QLambda/Domain/Presheaf/RepresentableBipolar/BornExpectation  
Ext.lean**

```

noncomputable def effectExpectationExt {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (E : Matrix (Fin A) (Fin A) ?) (hE : E.PosSemidef) : ? :=
  let c : ? := max (Matrix.trace E).re 1
  (c : ?) *
  effectExpectation (doubleDualEffectPairing F)
  ((c^-1 : ?) * E)
  (hE.smul (inv_nonneg.mpr (le_trans zero_le_one (le_max_right _ _))))
  (inv_smul_le_one_of_le_trace_smul E hE c le_rfl
    (lt_of_lt_of_le (by norm_num : (0 : ?) < 1) (le_max_right _ _)))

```

#### 4.4.996 Effect expectation of a scalar multiple of the nonnegativity of the double dual

**Statement.** For a natural number  $A$ , a real number  $r$ , a matrix  $E$ : if  $0 \leq r$ ;  $E$  is positive semidefinite;  $E \leq 1$ ; and  $(r \cdot E) \leq 1$ , then the effect expectation equals the product of  $r$  and  $\text{effectExpectation} (\text{doubleDualEffectPairing } F) \ E \ hE \ hE1$ .

**Proof.** Both sides are compared pointwise (by extensionality). The claim follows from a chain of equalities (or inequalities). The argument splits on the relevant condition. The key step rewrites with standard identities for matrices, the definition of the effect expectation, standard identities for complex numbers and associativity of multiplication.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/BornExpectationExt.lean](#)

```
theorem effectExpectation_smul_nonneg_doubleDual {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (r : ?) (hr0 : 0 <= r)
  (E : Matrix (Fin A) (Fin A) ?)
  (hE : E.PosSemidef) (hE1 : E <= 1) (hrE : (r * E) <= 1) :
  effectExpectation (doubleDualEffectPairing F) (r * E) (hE.smul hr0) hrE =
    (r : ?) * effectExpectation (doubleDualEffectPairing F) E hE hE1 := by
  by_cases hr1 : r <= 1
  * exact effectExpectation_smul_doubleDual F r hr0 hr1 E hE hE1
  * have hr1' : 1 < r := not_le.mp hr1
    have hrpos : 0 < r := lt_trans (by norm_num) hr1'
    have hinv0 : 0 <= (r^-1 : ?) := inv_nonneg.mpr hr0
    have hinv1 : (r^-1 : ?) <= 1 := inv_le_one_of_one_le_0 (le_of_lt hr1')
    have hRE_psd : (r * E).PosSemidef := hE.smul hr0
    have hsmul :=
      effectExpectation_smul_doubleDual F r^-1 hinv0 hinv1 (r * E) hRE_psd hrE
    have hE_eq : (r^-1 : ?) * (r * E) = E := by
      ext i j; simp [Matrix.smul_apply]; field_simp [hrpos.ne']
    have hr_ne : (r : ?) != 0 := by exact_mod_cast hrpos.ne'
    have hbE :
      effectExpectation (doubleDualEffectPairing F) E hE hE1 =
        (r : ?)^-1 *
          effectExpectation (doubleDualEffectPairing F) (r * E) hRE_psd hrE := by
    have : effectExpectation (doubleDualEffectPairing F) E hE hE1 =
      effectExpectation (doubleDualEffectPairing F)
        ((r^-1 : ?) * (r * E)) ((hE.smul hr0).smul hinv0)
        (smul_le_one_of_le_one (r * E) hRE_psd hrE r^-1 hinv0 hinv1) := by
      simp only [effectExpectation, hE_eq]
    rw [this, <- Complex.ofReal_inv]
    exact hsmul
  calc effectExpectation (doubleDualEffectPairing F) (r * E) (hE.smul hr0) hrE
    = (r : ?) * ((r : ?)^-1 *
      effectExpectation (doubleDualEffectPairing F) (r * E) hRE_psd hrE) := by
      rw [ <- mul_assoc, mul_inv_cancel_0 hr_ne, one_mul]
    _ = (r : ?) * effectExpectation (doubleDualEffectPairing F) E hE hE1 := by rw [
      <- hbE]
```

#### 4.4.997 $\text{Ext}(E) = t * \beta(t^{-1} \bullet E)$ for any sufficiently large $t$

**Statement.**  $\text{Ext}(E) = t * \beta(t^{-1} \bullet E)$  for any sufficiently large  $t$ .

**Proof.** Both sides are compared pointwise (by extensionality). The claim follows from a chain of equalities (or inequalities). The key step rewrites with standard identities for matrices, the hypothesis that  $0 < t$ , the definition of the effect expectation extensionality and the definition of the effect expectation.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/BornExpectation](#)

## Ext.lean

```

theorem effectExpectationExt_eq_of_scale {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (E : Matrix (Fin A) (Fin A) ?) (hE : E.PosSemidef) (t : ?)
  (ht : max (Matrix.trace E).re 1 <= t) (ht0 : 0 < t) :
  effectExpectationExt F E hE =
    (t : ?) * effectExpectation (doubleDualEffectPairing F) ((t^-1 : ?) * E)
      (hE.smul (inv_nonneg.mpr ht0.le))
      (inv_smul_le_one_of_le_trace_smul E hE t ht ht0) := by
  set c : ? := max (Matrix.trace E).re 1
  have hc0 : 0 < c := lt_of_lt_of_le (by norm_num : (0:?)<1) (le_max_right _ _)
  have hle : c <= t := ht
  -- Ext = c b(c^-1 E); want t b(t^-1 E)
  -- t^-1 E = (c/t) * (c^-1 E)
  have hmat : (t^-1 : ?) * E = ((c / t) : ?) * ((c^-1 : ?) * E) := by
    ext; simp [Matrix.smul_apply]; field_simp [ht0.ne', hc0.ne']
  have hratio0 : 0 <= c / t := div_nonneg hc0.le ht0.le
  have hratio1 : c / t <= 1 := (div_le_one ht0).mpr hle
  have hE0_psd : ((c^-1 : ?) * E).PosSemidef := hE.smul (inv_nonneg.mpr hc0.le)
  have hE0_le : ((c^-1 : ?) * E) <= 1 :=
    inv_smul_le_one_of_le_trace_smul E hE c le_rfl hc0
  have hsmul :=
    effectExpectation_smul_nonneg_doubleDual F (c / t) hratio0
      ((c^-1 : ?) * E) hE0_psd hE0_le (by
        simp [hmat] using inv_smul_le_one_of_le_trace_smul E hE t ht ht0)
  have hc_ne : (c : ?) != 0 := by exact_mod_cast hc0.ne'
  have ht_ne : (t : ?) != 0 := by exact_mod_cast ht0.ne'
  simp only [effectExpectationExt]
  have hb :
    effectExpectation (doubleDualEffectPairing F) ((t^-1 : ?) * E)
      (hE.smul (inv_nonneg.mpr ht0.le))
      (inv_smul_le_one_of_le_trace_smul E hE t ht ht0) =
      (c / t : ?) *
        effectExpectation (doubleDualEffectPairing F) ((c^-1 : ?) * E)
          hE0_psd hE0_le := by
    simp [hmat, effectExpectation, Complex.ofReal_div] using hsmul
  calc (c : ?) *
    effectExpectation (doubleDualEffectPairing F) ((c^-1 : ?) * E)
      (hE.smul (inv_nonneg.mpr (le_trans zero_le_one (le_max_right _ _))))
      (inv_smul_le_one_of_le_trace_smul E hE c le_rfl
        (lt_of_lt_of_le (by norm_num : (0:?)<1) (le_max_right _ _))) =
    (c : ?) * effectExpectation (doubleDualEffectPairing F) ((c^-1 : ?) * E)
      hE0_psd hE0_le := by simp only [effectExpectation]
  _ = (t : ?) * ((c / t : ?) *
    effectExpectation (doubleDualEffectPairing F) ((c^-1 : ?) * E)
      hE0_psd hE0_le) := by field_simp [hc_ne, ht_ne]
  _ = (t : ?) * effectExpectation (doubleDualEffectPairing F) ((t^-1 : ?) * E)
    (hE.smul (inv_nonneg.mpr ht0.le))
    (inv_smul_le_one_of_le_trace_smul E hE t ht ht0) := by rw [hmat]

```

### 4.4.998 Effect expectation extensionality of a scalar multiple

**Statement.** For a natural number  $A$ , a real number  $r$ , a matrix  $E$ : if  $0 \leq r$  and  $E$  is positive semidefinite, then the effect expectation extensionality of  $F, r \cdot E$ , the scalar multiplication of  $hr0$  equals the product

of  $r$  and the effect expectation extensionality of  $F, E, hE$ .

**Proof.** Both sides are compared pointwise (by extensionality). The claim follows from a chain of equalities (or inequalities). The argument splits on the relevant condition. An equation between variables is used to substitute one for the other. The key step rewrites with the usual algebraic identities, standard identities for complex numbers, the definition of the effect expectation extensionality and standard identities for matrices. The remaining identity is a polynomial identity in a commutative ring.

#### Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/BornExpectationExt.lean`

```
theorem effectExpectationExt_smul {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (r : ?) (hr0 : 0 <= r)
  (E : Matrix (Fin A) (Fin A) ?) (hE : E.PosSemidef) :
  effectExpectationExt F (r * E) (hE.smul hr0) =
    (r : ?) * effectExpectationExt F E hE := by
  by_cases hr : r = 0
  * subst hr
    simp only [zero_smul, Complex.ofReal_zero, zero_mul]
    simp only [effectExpectationExt, Matrix.trace_zero, Complex.zero_re, max_eq_right
      zero_le_one]
    have h0 : ((1^-1 : ?) * (0 : Matrix (Fin A) (Fin A) ?)) = 0 := by ext; simp
    simp [effectExpectation, h0] using effectExpectation_zero_doubleDual (A := A) F
  * have hrpos : 0 < r := lt_of_le_of_ne hr0 (Ne.symm hr)
    set D : ? := max (Matrix.trace E).re 1
    have hD0 : 0 < D := lt_of_lt_of_le (by norm_num : (0:?)<1) (le_max_right _ _)
    -- Choose U = max(D, c/r) where c = max(Tr(rE),1); equivalently U = max(D, max(Tr(
    rE),1)/r)
    have htr : Matrix.trace (r * E) = (r : ?) * Matrix.trace E := by
      simp [Matrix.trace, Finset.mul_sum, Matrix.smul_apply]
    have himE : (Matrix.trace E).im = 0 :=
      (Complex.nonneg_iff.mp (Matrix.PosSemidef.trace_nonneg hE)).2.symm
    have htRE : (Matrix.trace (r * E)).re = r * (Matrix.trace E).re := by
      have := congrArg Complex.re htr
      simp [Complex.mul_re, himE, Complex.ofReal_re] at this |-
    set cRE : ? := max (Matrix.trace (r * E)).re 1
    have hcRE0 : 0 < cRE := lt_of_lt_of_le (by norm_num : (0:?)<1) (le_max_right _ _)
    set U : ? := max D (cRE / r)
    have hU0 : 0 < U := lt_of_lt_of_le hD0 (le_max_left _ _)
    have hU_ge_D : D <= U := le_max_left _ _
    have hU_ge_c : cRE / r <= U := le_max_right _ _
    have hU_ge_E : max (Matrix.trace E).re 1 <= U := hU_ge_D
    have hUr_ge_RE : max (Matrix.trace (r * E)).re 1 <= r * U := by
      have : cRE <= r * U := by
        have h := (div_le_iff_0 hrpos).mp hU_ge_c
        rwa [mul_comm] at h
      simp [cRE] using this
    have hE_eq := effectExpectationExt_eq_of_scale F E hE U hU_ge_E hU0
    have hRE_eq :=
      effectExpectationExt_eq_of_scale F (r * E) (hE.smul hr0) (r * U) hUr_ge_RE (
      mul_pos hrpos hU0)
    have hmat : ((r * U)^-1 : ?) * (r * E) = (U^-1 : ?) * E := by
      ext; simp [Matrix.smul_apply]; field_simp [hrpos.ne', hU0.ne']
    calc effectExpectationExt F (r * E) (hE.smul hr0)
      = ((r * U) : ?) *
```

```

effectExpectation (doubleDualEffectPairing F) (((r * U)^-1 : ?) * (r * E))
  ((hE.smul hr0).smul (inv_nonneg.mpr (mul_pos hrpos hU0).le))
  (inv_smul_le_one_of_le_trace_smul (r * E) (hE.smul hr0) (r * U)
    hUr_ge_RE (mul_pos hrpos hU0)) := hRE_eq
_ = (r : ?) * (U : ?) *
  effectExpectation (doubleDualEffectPairing F) ((U^-1 : ?) * E)
  (hE.smul (inv_nonneg.mpr hU0.le))
  (inv_smul_le_one_of_le_trace_smul E hE U hU_ge_E hU0) := by
  simp only [effectExpectation, hmat]; push_cast; ring
_ = (r : ?) * effectExpectationExt F E hE := by
  rw [hE_eq]; ring

```

#### 4.4.999 Effect expectation extensionality, when it is at most one

**Statement.** For a natural number  $A$ , a matrix  $E$ : if  $E$  is positive semidefinite and  $E \leq 1$ , then the effect expectation extensionality of  $F, E, hE$  equals `effectExpectation (doubleDualEffectPairing F) E hE hE1`.

**Proof.** The claim follows from a chain of equalities (or inequalities). The key step rewrites with the definition of the effect expectation extensionality, the definition of the effect expectation and standard identities for complex numbers.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornExpectationExt.lean`

```

theorem effectExpectationExt_of_le_one {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (E : Matrix (Fin A) (Fin A) ?) (hE : E.PosSemidef) (hE1 : E <= 1) :
  effectExpectationExt F E hE =
    effectExpectation (doubleDualEffectPairing F) E hE hE1 := by
  have h := effectExpectationExt_eq_of_scale F E hE
    (max (Matrix.trace E).re 1) le_rfl
    (lt_of_lt_of_le (by norm_num : (0:?)<1) (le_max_right _ _))
  simp only [effectExpectationExt] at h |-
  set c : ? := max (Matrix.trace E).re 1
  have hc0 : 0 <= c := le_trans zero_le_one (le_max_right _ _)
  have hc1 : 1 <= c := le_max_right _ _
  have hinv0 : 0 <= (c^-1 : ?) := inv_nonneg.mpr hc0
  have hinv1 : (c^-1 : ?) <= 1 := inv_le_one_of_one_le_0 hc1
  have hsmul := effectExpectation_smul_doubleDual F c^-1 hinv0 hinv1 E hE hE1
  have hc_ne : (c : ?) != 0 := by
    exact_mod_cast ne_of_gt (lt_of_lt_of_le (by norm_num : (0 : ?) < 1) hc1)
  calc (c : ?) *
    effectExpectation (doubleDualEffectPairing F) ((c^-1 : ?) * E)
      (hE.smul (inv_nonneg.mpr (le_trans zero_le_one (le_max_right _ _))))
      (inv_smul_le_one_of_le_trace_smul E hE c le_rfl
        (lt_of_lt_of_le (by norm_num : (0 : ?) < 1) (le_max_right _ _))) =
    (c : ?) *
      effectExpectation (doubleDualEffectPairing F) ((c^-1 : ?) * E)
        (hE.smul hinv0) (smul_le_one_of_le_one E hE hE1 c^-1 hinv0 hinv1) := by
      simp only [effectExpectation]
  _ = (c : ?) * ((c^-1 : ?) *
    effectExpectation (doubleDualEffectPairing F) E hE hE1) := by
    rw [hsmul]; simp [Complex.ofReal_inv]

```

```

_ = effectExpectation (doubleDualEffectPairing F) E hE hE1 := by
  field_simp [hc_ne]

```

#### 4.4.1000 Effect expectation extensionality of a sum

**Statement.** For a natural number  $A$ , matrixes  $E, G$ : if  $E$  is positive semidefinite and  $G$  is positive semidefinite, then the effect expectation extensionality of  $F$ , the sum of  $E$  and  $G$ , the addition of  $hG$  equals the sum of the effect expectation extensionality of  $F, E, hE$  and the effect expectation extensionality of  $F, G, hG$ .

**Proof.** The claim follows from a chain of equalities (or inequalities). The key step rewrites with standard identities for matrices, standard identities for complex numbers, the definition of the effect expectation and the usual algebraic identities.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/BornExpectationExt.lean](#)

```

theorem effectExpectationExt_add {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (E G : Matrix (Fin A) (Fin A) ?) (hE : E.PosSemidef) (hG : G.PosSemidef) :
  effectExpectationExt F (E + G) (hE.add hG) =
    effectExpectationExt F E hE + effectExpectationExt F G hG := by
  set cE : ? := max (Matrix.trace E).re 1
  set cG : ? := max (Matrix.trace G).re 1
  set t : ? := cE + cG
  have hcE0 : 0 < cE := lt_of_lt_of_le (by norm_num : (0:?) < 1) (le_max_right _ _)
  have hcG0 : 0 < cG := lt_of_lt_of_le (by norm_num : (0:?) < 1) (le_max_right _ _)
  have ht0 : 0 < t := add_pos hcE0 hcG0
  have himE : (Matrix.trace E).im = 0 :=
    (Complex.nonneg_iff.mp (Matrix.PosSemidef.trace_nonneg hE)).2.symm
  have himG : (Matrix.trace G).im = 0 :=
    (Complex.nonneg_iff.mp (Matrix.PosSemidef.trace_nonneg hG)).2.symm
  have htSum : (Matrix.trace (E + G)).re =
    (Matrix.trace E).re + (Matrix.trace G).re := by
    simp [Matrix.trace_add, Complex.add_re]
  have ht_ge_sum : max (Matrix.trace (E + G)).re 1 <= t := by
    rw [htSum]
    refine max_le (add_le_add (le_max_left _ _) (le_max_left _ _)) ?_
    * calc (1 : ?) <= cE := le_max_right _ _
      _ <= cE + cG := le_add_of_nonneg_right hcG0.le
  have ht_ge_E : max (Matrix.trace E).re 1 <= t :=
    le_add_of_nonneg_right hcG0.le
  have ht_ge_G : max (Matrix.trace G).re 1 <= t :=
    le_add_of_nonneg_left hcE0.le
  have hE_eq := effectExpectationExt_eq_of_scale F E hE t ht_ge_E ht0
  have hG_eq := effectExpectationExt_eq_of_scale F G hG t ht_ge_G ht0
  have hSum_eq :=
    effectExpectationExt_eq_of_scale F (E + G) (hE.add hG) t ht_ge_sum ht0
  have hmat : (t-1 : ?) * (E + G) = (t-1 : ?) * E + (t-1 : ?) * G := smul_add _ _ _
  have hE1 : ((t-1 : ?) * E) <= 1 :=
    inv_smul_le_one_of_le_trace_smul E hE t ht_ge_E ht0
  have hG1 : ((t-1 : ?) * G) <= 1 :=
    inv_smul_le_one_of_le_trace_smul G hG t ht_ge_G ht0
  have hSum1 : ((t-1 : ?) * (E + G)) <= 1 :=
    inv_smul_le_one_of_le_trace_smul (E + G) (hE.add hG) t ht_ge_sum ht0

```

```

have hEG1 : ((t^-1 : ?) * E + (t^-1 : ?) * G) <= 1 := by
  convert hSum1 using 1
  exact hmat.symm
have hadd :=
  effectExpectation_add_doubleDual F ((t^-1 : ?) * E) ((t^-1 : ?) * G)
    (hE.smul (inv_nonneg.mpr ht0.le)) (hG.smul (inv_nonneg.mpr ht0.le))
    hE1 hG1 hEG1
have hSum_b :
  effectExpectation (doubleDualEffectPairing F) ((t^-1 : ?) * (E + G))
    ((hE.add hG).smul (inv_nonneg.mpr ht0.le)) hSum1 =
  effectExpectation (doubleDualEffectPairing F)
    ((t^-1 : ?) * E + (t^-1 : ?) * G)
    ((hE.smul (inv_nonneg.mpr ht0.le)).add (hG.smul (inv_nonneg.mpr ht0.le)))
    hEG1 := by
  simp only [effectExpectation, hmat]
calc effectExpectationExt F (E + G) (hE.add hG)
  = (t : ?) * effectExpectation (doubleDualEffectPairing F) ((t^-1 : ?) * (E + G))
    ((hE.add hG).smul (inv_nonneg.mpr ht0.le)) hSum1 := hSum_eq
_ = (t : ?) * effectExpectation (doubleDualEffectPairing F)
    ((t^-1 : ?) * E + (t^-1 : ?) * G)
    ((hE.smul (inv_nonneg.mpr ht0.le)).add (hG.smul (inv_nonneg.mpr ht0.le)))
    hEG1 := by rw [hSum_b]
_ = (t : ?) * (effectExpectation (doubleDualEffectPairing F) ((t^-1 : ?) * E)
    (hE.smul (inv_nonneg.mpr ht0.le)) hE1 +
  effectExpectation (doubleDualEffectPairing F) ((t^-1 : ?) * G)
    (hG.smul (inv_nonneg.mpr ht0.le)) hG1) := by rw [hadd]
_ = effectExpectationExt F E hE + effectExpectationExt F G hG := by
  rw [mul_add, <- hE_eq, <- hG_eq]

```

#### 4.4.1001 The quadratic effect pairing equals an extensionality

**Statement.** For a natural number  $A$ , an index  $v$ : the quadratic effect pairing of the double dual effect pairing of  $F$  and  $v$  equals the effect expectation extensionality of  $F$ , the outer product of  $v$  and  $\text{star } v$ , the positivity semidef vector multiplication vector self adjoint of  $v$ .

**Proof.** Both sides are compared pointwise (by extensionality). The claim follows from a chain of equalities (or inequalities). The argument splits on the relevant condition. The key step rewrites with the fact that the quadratic effect pairing equals an expectation, the fact that effect expectation extensionality, when it is at most one, the definition of the normalize vector and standard identities for complex numbers.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornExpectation`  
**Ext.lean**

```

theorem effectPairingQuad_eq_ext {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (v : Fin A -> ?) :
  effectPairingQuad (doubleDualEffectPairing F) v =
    effectExpectationExt F (Matrix.vecMulVec v (star v))
    (Matrix.posSemidef_vecMulVec_self_star v) := by
  by_cases hle : Matrix.vecMulVec v (star v) <= (1 : Matrix (Fin A) (Fin A) ?)
  * rw [effectPairingQuad_eq_expectation F v hle, effectExpectationExt_of_le_one]
  * have hv : star v ?? v != 0 := by
    intro hv0
    have : v = 0 := (dotProduct_star_self_eq_zero).1 hv0

```

```

have hmat0 : Matrix.vecMulVec v (star v) = 0 := by simp [this]
exact hle (by simp [hmat0])
set u := normalizeVec v hv
have hre := (star_dotProduct_self_nonneg_real v).1
have him := (star_dotProduct_self_nonneg_real v).2
set s : ? := (Real.sqrt (star v ?? v).re)
have hv_eq : v = s * u := by
  simp only [u, normalizeVec, s]
  ext i
  have hs_ne : s != 0 := by
    intro hs0
    have : (star v ?? v).re = 0 :=
      (Real.sqrt_eq_zero hre).1 (by simpa [s] using congrArg Complex.re hs0)
    exact hv (Complex.ext this him)
  change v i = s * (s^-1 * v i)
  field_simp [hs_ne]
have hstar_s : star s = s := by simp [s, Complex.conj_ofReal]
have hnorm_sq : star v ?? v = s * s := by
  apply Complex.ext
  * have : (star v ?? v).re = s.re * s.re := by
    simpa [s, Complex.ofReal_re] using (Real.mul_self_sqrt hre).symm
  * simpa [Complex.mul_re, s] using this
  * simpa [Complex.mul_im, s] using him
have hmat : Matrix.vecMulVec v (star v) =
  ((star v ?? v).re : ?) * Matrix.vecMulVec u (star u) := by
  have hnorm_ofReal : ((star v ?? v).re) : ? = star v ?? v :=
    ofReal_re_of_im_zero _ him
  have hsmul_eq :
    ((star v ?? v).re : ?) * Matrix.vecMulVec u (star u) =
      (star v ?? v) * Matrix.vecMulVec u (star u) := by
    ext i j; simp [Matrix.smul_apply, smul_eq_mul, hnorm_ofReal]
  calc Matrix.vecMulVec v (star v)
    = Matrix.vecMulVec (s * u) (star (s * u)) := by rw [hv_eq]
    _ = (s * star s) * Matrix.vecMulVec u (star u) := vecMulVec_smul_star s u
    _ = (s * s) * Matrix.vecMulVec u (star u) := by rw [hstar_s]
    _ = (star v ?? v) * Matrix.vecMulVec u (star u) := by rw [ <- hnorm_sq]
    _ = ((star v ?? v).re : ?) * Matrix.vecMulVec u (star u) := by rw [ <-
hsmul_eq]
have hu_le : Matrix.vecMulVec u (star u) <= 1 :=
  vecMulVec_unit_le_one u (normalizeVec_norm v hv)
have hs0 : 0 <= (star v ?? v).re := hre
set r : ? := (star v ?? v).re
have hnorm_ofReal : (r : ?) = star v ?? v := ofReal_re_of_im_zero _ him
have hQ : effectPairingQuad (doubleDualEffectPairing F) v =
  (r : ?) *
    effectExpectation (doubleDualEffectPairing F)
      (Matrix.vecMulVec u (star u))
      (Matrix.posSemidef_vecMulVec_self_star u) hu_le := by
  calc effectPairingQuad (doubleDualEffectPairing F) v
    = effectPairingQuad (doubleDualEffectPairing F) (s * u) := by rw [hv_eq]
    _ = (star s * s) * effectPairingQuad (doubleDualEffectPairing F) u :=
      effectPairingQuad_smul _ _ _
    _ = (s * s) * effectPairingQuad (doubleDualEffectPairing F) u := by rw [
hstar_s]
    _ = (star v ?? v) * effectPairingQuad (doubleDualEffectPairing F) u := by
      rw [ <- hnorm_sq]

```



```

    _ = (r : ?) * effectPairingQuad (doubleDualEffectPairing F) u := by rw [ <-
hnrm_ofReal]
    _ = (r : ?) *
      effectExpectation (doubleDualEffectPairing F)
        (Matrix.vecMulVec u (star u))
        (Matrix.posSemidef_vecMulVec_self_star u) hu_le := by
      rw [effectPairingQuad_eq_expectation F u hu_le]
  have hExt :=
    effectExpectationExt_smul F r hs0
    (Matrix.vecMulVec u (star u)) (Matrix.posSemidef_vecMulVec_self_star u)
  have hu_ext :=
    effectExpectationExt_of_le_one F (Matrix.vecMulVec u (star u))
    (Matrix.posSemidef_vecMulVec_self_star u) hu_le
  have hmat' : Matrix.vecMulVec v (star v) =
    (r : ?) * Matrix.vecMulVec u (star u) := hmat
  calc effectPairingQuad (doubleDualEffectPairing F) v
    = (r : ?) *
      effectExpectation (doubleDualEffectPairing F)
        (Matrix.vecMulVec u (star u))
        (Matrix.posSemidef_vecMulVec_self_star u) hu_le := hQ
  _ = (r : ?) *
    effectExpectationExt F (Matrix.vecMulVec u (star u))
    (Matrix.posSemidef_vecMulVec_self_star u) := by rw [ <- hu_ext]
  _ = effectExpectationExt F ((r : ?) * Matrix.vecMulVec u (star u))
    ((Matrix.posSemidef_vecMulVec_self_star u).smul hs0) := hExt.symm
  _ = effectExpectationExt F (Matrix.vecMulVec v (star v))
    (Matrix.posSemidef_vecMulVec_self_star v) := by
    simp only [effectExpectationExt, hmat']

```

/-! ### Polar ?-sesquilinearity -/

#### 4.4.1002 Polar $\mathbb{C}$ -sesquilinearity

**Statement.** ### Polar  $\mathbb{C}$ -sesquilinearity. Formally:  $\text{effectPairingPolar } (\text{doubleDualEffectPairing } F) \text{ } (-x) \text{ } y = -\text{effectPairingPolar } (\text{doubleDualEffectPairing } F) \text{ } x \text{ } y$ .

**Proof.** The goal is simplified using the usual algebraic identities and the polarised effect pairing of zero, in the left argument.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/BornExpectationExt.lean](#)

```

theorem effectPairingPolar_neg_left {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (x y : Fin A -> ?) :
  effectPairingPolar (doubleDualEffectPairing F) (-x) y =
    -effectPairingPolar (doubleDualEffectPairing F) x y := by
  have h := effectPairingPolar_add_left F x (-x) y
  simp only [add_neg_cancel, effectPairingPolar_zero_left] at h
  exact eq_neg_of_add_eq_zero_right h.symm

```

#### 4.4.1003 Polarised effect pairing of a natural number of a scalar multiple, in the left argument

**Statement.** For natural numbers  $A, k$ , indexes  $x, y$ : the polarised effect pairing of the double dual effect pairing of  $F, k \cdot x, y$  equals the product of  $k$  and the polarised effect pairing of `doubleDualEffectPairing F, x, y`.

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the usual algebraic identities and the polarised effect pairing of a natural-number multiple, in the left argument.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornExpectation`  
**Ext.lean**

```
theorem effectPairingPolar_natCast_smul_left {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (k : Nat) (x y : Fin A -> ?) :
  effectPairingPolar (doubleDualEffectPairing F) ((k : ?) * x) y =
    (k : ?) * effectPairingPolar (doubleDualEffectPairing F) x y := by
  have : (k : ?) * x = k * x := by ext i; simp [nsmul_eq_mul]
  rw [this, effectPairingPolar_nsmul_left]
```

#### 4.4.1004 Polarised effect pairing of an integer multiple, in the left argument

**Statement.** For a natural number  $A$ , indexes  $x, y$ : the polarised effect pairing of the double dual effect pairing of  $F, n \cdot x, y$  equals the product of  $n$  and the polarised effect pairing of `doubleDualEffectPairing F, x, y`.

**Proof.** By case analysis on  $n$ . For a construction from a natural-number and a negation successor, the claim is checked directly. The key step rewrites with the usual algebraic identities and the polar  $\mathbb{C}$ -sesquilinearity. The remaining identity is a polynomial identity in a commutative ring.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornExpectation`  
**Ext.lean**

```
theorem effectPairingPolar_zsmul_left {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (n : Int) (x y : Fin A -> ?) :
  effectPairingPolar (doubleDualEffectPairing F) ((n : ?) * x) y =
    (n : ?) * effectPairingPolar (doubleDualEffectPairing F) x y := by
  cases n with
  | ofNat k => simp using effectPairingPolar_natCast_smul_left F k x y
  | negSucc k =>
    simp only [Int.cast_negSucc]
    have hk := effectPairingPolar_natCast_smul_left F (k + 1) x y
    have hneg : forall z : ?, (-z) * x = -(z * x) := fun z => by ext; rw [neg_smul]
    rw [hneg, effectPairingPolar_neg_left, hk]; ring
```

#### 4.4.1005 Polarised effect pairing of the rational scalar multiplication, in the left argument

**Statement.** For a natural number  $A$ , a rational number  $q$ , indexes  $x, y$ : the polarised effect pairing of the double dual effect pairing of  $F, q \cdot x, y$  equals the product of  $q$  and the polarised effect pairing of `doubleDualEffectPairing F, x, y`.

**Proof.** The goal is simplified using the usual algebraic identities.

**Lean 4 source QLambda/Domain/Presheaf/RepresentableBipolar/BornExpectation  
Ext.lean**

```
theorem effectPairingPolar_qsmul_left {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (q : ?) (x y : Fin A -> ?) :
  effectPairingPolar (doubleDualEffectPairing F) ((q : ?) * x) y =
  (q : ?) * effectPairingPolar (doubleDualEffectPairing F) x y := by
let hom : ? -> + ? := AddMonoidHom.mk'
  (fun c => effectPairingPolar (doubleDualEffectPairing F) (c * x) y)
  (fun a b => by
    simp [add_smul] using
      effectPairingPolar_add_left F (a * x) (b * x) y)
let lhom : ? -> ?[?] ? := AddMonoidHom.toRatLinearMap hom
simp [lhom, hom, Rat.smul_def, one_smul] using lhom.map_smul q (1 : ?)
```

**4.4.1006 Polarised effect pairing of the i of a scalar multiple, in the left argument**

**Statement.** For a natural number A, indexes x, y: the polarised effect pairing of the double dual effect pairing of F, Complex.I • x, y equals the product of -Complex.I and the polarised effect pairing of doubleDualEffectPairing F, x, y.

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the fact that the polarised effect pairing equals a construction from a norm, the usual algebraic identities, associativity of multiplication and standard identities for complex numbers. The remaining identity is a polynomial identity in a commutative ring.

**Lean 4 source QLambda/Domain/Presheaf/RepresentableBipolar/BornExpectation  
Ext.lean**

```
theorem effectPairingPolar_I_smul_left {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (x y : Fin A -> ?) :
  effectPairingPolar (doubleDualEffectPairing F) (Complex.I * x) y =
  -Complex.I * effectPairingPolar (doubleDualEffectPairing F) x y := by
set a := doubleDualEffectPairing F
rw [effectPairingPolar_eq_ofNorm a (Complex.I * x) y,
  effectPairingPolar_eq_ofNorm a x y]
have hII : Complex.I * (Complex.I * x) = (-1 : ?) * x := by
  ext i; simp only [Pi.smul_apply, smul_eq_mul]
  rw [← mul_assoc, Complex.I_mul_I, neg_one_mul]
have hII' : (-1 : ?) * x = -x := by ext; simp
have h3 : effectPairingQuad a (Complex.I * (Complex.I * x) + y) =
  effectPairingQuad a (x - y) := by
  rw [hII, hII']
  have : -x + y = -(x - y) := by ext; simp [sub_eq_add_neg]; abel
  rw [this, q_neg]
have h4 : effectPairingQuad a (Complex.I * (Complex.I * x) - y) =
  effectPairingQuad a (x + y) := by
  rw [hII, hII']
  have : -x - y = -(x + y) := by ext; simp [sub_eq_add_neg]; abel
  rw [this, q_neg]
rw [h3, h4]; ring_nf; rw [Complex.I_sq]; ring
```

#### 4.4.1007 Order bound for the quadratic effect pairing of the norm

**Statement.** For a natural number  $A$ , an index  $v$ :  $\| \text{effectPairingQuad } (\text{doubleDualEffectPairing } F) \ v \| \leq (\text{star } v \cdot v).re$ .

**Proof.** The argument splits on the relevant condition. The key step rewrites with the definition of the quadratic effect pairing and standard identities for complex numbers. The remaining inequalities follow by linear arithmetic.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornExpectation`  
**Ext.lean**

```
theorem effectPairingQuad_norm_le {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (v : Fin A -> ?) :
  ?effectPairingQuad (doubleDualEffectPairing F) v? <= (star v ?? v).re := by
  have hn := star_dotProduct_self_nonneg_real v
  have hq := effectPairingQuad_nonneg (doubleDualEffectPairing F) v
  have hnorm : ?effectPairingQuad (doubleDualEffectPairing F) v? =
    |(effectPairingQuad (doubleDualEffectPairing F) v).re| :=
    (Complex.abs_re_eq_norm.mpr hq.2).symm
  rw [hnorm, abs_of_nonneg hq.1]
  simp only [effectPairingQuad]
  split_ifs with h
  * exact hn.1
  * have hb := bornScalar_nonneg
    (doubleDualEffectPairing F
      (ofEffect (Matrix.vecMulVec (normalizeVec v h) (star (normalizeVec v h)))
        (Matrix.posSemidef_vecMulVec_self_star _)
        (vecMulVec_unit_le_one _ (normalizeVec_norm v h))))
  set b := bornScalar (doubleDualEffectPairing F
    (ofEffect (Matrix.vecMulVec (normalizeVec v h) (star (normalizeVec v h)))
      (Matrix.posSemidef_vecMulVec_self_star _)
      (vecMulVec_unit_le_one _ (normalizeVec_norm v h))))
  have hre : ((star v ?? v) * b).re = (star v ?? v).re * b.re := by
    simp [Complex.mul_re, hn.2, hb.2.1]
  change ((star v ?? v) * b).re <= (star v ?? v).re
  rw [hre]; nlinarith [hn.1, hb.2.2]
```

#### 4.4.1008 The real part of an adjoint of the dot equals the sum of the squared norm

**Statement.** For a natural number  $A$ , an index  $v$ :  $(\text{star } v \cdot v).re = \sum i : \text{Fin } A, \text{Complex.normSq } (v \ i)$ .

**Proof.** The key step rewrites with standard identities for complex numbers and the sum of a congruence.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornExpectation`  
**Ext.lean**

```
theorem re_star_dot_eq_sum_normSq {A : Nat}
  (v : Fin A -> ?) :
  (star v ?? v).re = ? i : Fin A, Complex.normSq (v i) := by
  simp only [dotProduct, Pi.star_apply]
  rw [Complex.re_sum]
  refine Finset.sum_congr rfl fun i _ => ?_
```

```

have : star (v i) * v i = (Complex.normSq (v i) : ?) := by
  simp [Complex.star_def] using (Complex.normSq_eq_conj_mul_self (z := v i)).symm
rw [this, Complex.ofReal_re]

```

#### 4.4.1009 The squared norm of a sum is bounded by two

**Statement.** For complex numbers  $z, w$ :  $\text{Complex.normSq } (z + w) \leq 2 * (\text{Complex.normSq } z + \text{Complex.normSq } w)$ .

**Proof.** The remaining inequalities follow by linear arithmetic.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/BornExpectation](#)  
**Ext.lean**

```

theorem normSq_add_le_two (z w : ?) :
  Complex.normSq (z + w) <= 2 * (Complex.normSq z + Complex.normSq w) := by
  have h := Complex.normSq_add z w
  have hsub := Complex.normSq_sub z w
  have : Complex.normSq (z + w) + Complex.normSq (z - w) =
    2 * (Complex.normSq z + Complex.normSq w) := by
    rw [h, hsub]; ring
  linarith [Complex.normSq_nonneg (z - w)]

```

#### 4.4.1010 Order bound for the real part of the norm of a scalar multiple of a sum

**Statement.** For a natural number  $A$ , a real number  $r$ , indexes  $x, z$ : if  $|r| \leq 1$ , then  $(\text{star } (r \cdot x + z) \cdot (r \cdot x + z)).\text{re} \leq 2 * ((\text{star } x \cdot x).\text{re} + (\text{star } z \cdot z).\text{re})$ .

**Proof.** The claim follows from a chain of equalities (or inequalities). The key step rewrites with the fact that the real part of an adjoint of the dot equals the sum of the squared norm, the usual algebraic identities, standard identities for finite sums and distributivity of multiplication over finite sums.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/BornExpectation](#)  
**Ext.lean**

```

theorem re_norm_smul_add_le {A : Nat}
  (r : ?) (hr : |r| <= 1) (x z : Fin A -> ?) :
  (star ((r : ?) * x + z) ?? ((r : ?) * x + z)).re <=
    2 * ((star x ?? x).re + (star z ?? z).re) := by
  rw [re_star_dot_eq_sum_normSq, re_star_dot_eq_sum_normSq x,
    re_star_dot_eq_sum_normSq z]
  calc ? i : Fin A, Complex.normSq ((r : ?) * x + z) i
    = ? i, Complex.normSq ((r : ?) * x i + z i) := by
      simp [Pi.add_apply, Pi.smul_apply]
  _ <= ? i, 2 * (Complex.normSq ((r : ?) * x i) + Complex.normSq (z i)) :=
    Finset.sum_le_sum fun i _ => normSq_add_le_two _ _
  _ = 2 * (? i, Complex.normSq ((r : ?) * x i) + ? i, Complex.normSq (z i)) := by
    rw [← Finset.sum_add_distrib, ← Finset.mul_sum]
  _ = 2 * (r ^ 2 * ? i, Complex.normSq (x i) + ? i, Complex.normSq (z i)) := by
    have : forall i, Complex.normSq ((r : ?) * x i) = r ^ 2 * Complex.normSq (x
  i) := by
    intro i; simp [Complex.normSq_mul, Complex.normSq_ofReal, sq]
    simp_rw [this, ← Finset.mul_sum]

```

```

_ <= 2 * (? i, Complex.normSq (x i) + ? i, Complex.normSq (z i)) := by
  have hr2 : r ^ 2 <= 1 := (sq_le_one_iff_abs_le_one r).2 hr
  nlinarith [Finset.sum_nonneg (fun i (_ : i in (Finset.univ : Finset (Fin A
))) =>
    Complex.normSq_nonneg (x i))]

```

#### 4.4.1011 Definition of the effect pairing polar real morphism

**Definition.** The effect pairing polar real morphism of  $\mathbb{F}$ ,  $x$  and  $y$  is a function of type  $\mathbb{R} \rightarrow + \mathbb{C}$ .

**Construction.** Defined by an explicit formula built from the polarised effect pairing, the double dual effect pairing, the extensionality and the effect pairing polar addition left.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/BornExpectation](#)  
**Ext.lean**

```

noncomputable def effectPairingPolarRealHom {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (x y : Fin A -> ?) : ? -> + ? :=
  AddMonoidHom.mk'
  (fun r => effectPairingPolar (doubleDualEffectPairing F) ((r : ?) * x) y)
  (fun a b => by
    have : ((a + b : ?) : ?) * x = (a : ?) * x + (b : ?) * x := by
      ext i; simp [Pi.smul_apply, Pi.add_apply, smul_eq_mul]; ring
    rw [this, effectPairingPolar_add_left])

```

#### 4.4.1012 Continuity of the effect pairing polar real morphism

**Statement.** For a natural number  $A$ , indexes  $x, y$ :  $\text{effectPairingPolarRealHom } F \ x \ y$  is continuous.

**Proof.** Both sides are compared pointwise (by extensionality). Each component of the claim is established separately. The hypotheses are unpacked into their constituent data. The key step rewrites with standard identities for real numbers, the usual algebraic identities, the definition of the effect pairing polar real morphism and the definition of the polarised effect pairing. The remaining inequalities follow by linear arithmetic.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/BornExpectation](#)  
**Ext.lean**

```

theorem effectPairingPolarRealHom_continuous {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (x y : Fin A -> ?) : Continuous (effectPairingPolarRealHom F x y) := by
  have hs : Metric.ball (0 : ?) 1 in nhds (0 : ?) := Metric.ball_mem_nhds _ (by
    norm_num)
  refine (effectPairingPolarRealHom F x y).continuous_of_isBounded_nhds_zero hs ?_
  rw [isBounded_iff_forall_norm_le]
  refine <8 * ((star x ?? x).re + (star y ?? y).re + 1), ?_>
  intro z hz
  obtain <r, hrMem, rfl> := (Set.mem_image _ _ _).1 hz
  have hrle : |r| <= 1 := le_of_lt (by
    simp [Real.dist_eq, sub_zero] using Metric.mem_ball.mp hrMem)
  simp only [effectPairingPolarRealHom, AddMonoidHom.mk'_apply, effectPairingPolar]

```

```

set Q := effectPairingQuad (doubleDualEffectPairing F)
have bound (w : Fin A → ?) :
  ?Q ((r : ?) * x + w)? <= 2 * ((star x ?? x).re + (star w ?? w).re) :=
  le_trans (effectPairingQuad_norm_le F _) (re_norm_smul_add_le r hrle x w)
have hyI : (star (Complex.I * y) ?? (Complex.I * y)).re = (star y ?? y).re := by
  have h : star Complex.I * Complex.I = 1 := by simp [Complex.conj_I, Complex.
    I_mul_I]
  rw [star_dotProduct_smul_self, h, one_mul]
have hneg (w : Fin A → ?) : (star (-w) ?? (-w)).re = (star w ?? w).re := by
  have : -w = (-1 : ?) * w := by ext; simp
  rw [this, star_dotProduct_smul_self]; simp
have hsub (w : Fin A → ?) : (r : ?) * x - w = (r : ?) * x + (-w) := by
  ext; simp [sub_eq_add_neg]
have htri :
  ?Q ((r:?) * x + y) - Q ((r:?) * x - y) - Complex.I * Q ((r:?) * x + Complex.I * y) +
    Complex.I * Q ((r:?) * x - Complex.I * y)) / 4? <=
  ?Q ((r:?) * x + y)? + ?Q ((r:?) * x - y)? + ?Q ((r:?) * x + Complex.I * y)? +
    ?Q ((r:?) * x - Complex.I * y)? := by
  have hdiv (a : ?) : ?a / 4? <= ?a? := by
    rw [norm_div]
    have : ?(4 : ?)? = 4 := by norm_num
    rw [this]; exact div_le_self (norm_nonneg _) (by norm_num)
  refine le_trans (hdiv _) ?_
  set a := Q ((r:?) * x + y)
  set b := Q ((r:?) * x - y)
  set c := Q ((r:?) * x + Complex.I * y)
  set d := Q ((r:?) * x - Complex.I * y)
  have : a - b - Complex.I * c + Complex.I * d = a + (-b) + -(Complex.I * c) +
    Complex.I * d := by
    ring
  rw [this]
  refine le_trans (norm_add_le _ _) ?_
  refine le_trans (add_le_add (norm_add_le _ _) le_refl) ?_
  refine le_trans (add_le_add (add_le_add (norm_add_le _ _) le_refl) le_refl) ?_
  simp only [norm_neg, norm_mul, Complex.norm_I, one_mul]
  exact le_refl
have Nx := (star_dotProduct_self_nonneg_real x).1
have Ny := (star_dotProduct_self_nonneg_real y).1
have b1 := bound y
have b2 : ?Q ((r:?) * x - y)? <= 2 * ((star x ?? x).re + (star y ?? y).re) := by
  rw [hsub y]; refine le_trans (bound (-y)) ?_; rw [hneg y]
have b3 : ?Q ((r:?) * x + Complex.I * y)? <= 2 * ((star x ?? x).re + (star y ?? y).re)
  := by
  refine le_trans (bound (Complex.I * y)) ?_; rw [hyI]
have b4 : ?Q ((r:?) * x - Complex.I * y)? <= 2 * ((star x ?? x).re + (star y ?? y).re)
  := by
  rw [hsub (Complex.I * y)]; refine le_trans (bound -(Complex.I * y)) ?_
  rw [hneg (Complex.I * y), hyI]
refine le_trans htri ?_
nlinarith [b1, b2, b3, b4, Nx, Ny]

```

#### 4.4.1013 Polarised effect pairing of a real number of a scalar multiple, in the left argument

**Statement.** For a natural number  $A$ , a real number  $r$ , indexes  $x, y$ : the polarised effect pairing of the double dual effect pairing of  $F, r \cdot x, y$  equals the product of  $r$  and the polarised effect pairing of `doubleDualEffectPairing`  $F, x, y$ .

**Proof.** The goal is simplified using the definition of the effect pairing polar real morphism and the usual algebraic identities.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornExpectation`  
**Ext.lean**

```
theorem effectPairingPolar_ofReal_smul_left {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (r : ?) (x y : Fin A -> ?) :
  effectPairingPolar (doubleDualEffectPairing F) ((r : ?) * x) y =
  (r : ?) * effectPairingPolar (doubleDualEffectPairing F) x y := by
  have h := map_real_smul (effectPairingPolarRealHom F x y) (
    effectPairingPolarRealHom_continuous F x y) r (1 : ?)
  simpa [effectPairingPolarRealHom, AddMonoidHom.mk'_apply, one_smul] using h
```

#### 4.4.1014 Polarised effect pairing of a scalar multiple, in the left argument

**Statement.** For a natural number  $A$ , a complex number  $c$ , indexes  $x, y$ : the polarised effect pairing of the double dual effect pairing of  $F, c \cdot x, y$  equals the product of the adjoint of  $c$  and the polarised effect pairing of `doubleDualEffectPairing`  $F, x, y$ .

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the usual algebraic identities, the polarised effect pairing of a sum, in the left argument and standard identities for complex numbers. The remaining identity is a polynomial identity in a commutative ring.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornExpectation`  
**Ext.lean**

```
theorem effectPairingPolar_smul_left {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (c : ?) (x y : Fin A -> ?) :
  effectPairingPolar (doubleDualEffectPairing F) (c * x) y =
  star c * effectPairingPolar (doubleDualEffectPairing F) x y := by
  have hre := effectPairingPolar_ofReal_smul_left F c.re x y
  have him := effectPairingPolar_ofReal_smul_left F c.im (Complex.I * x) y
  have hI := effectPairingPolar_I_smul_left F x y
  have hc : c * x = (c.re : ?) * x + (c.im : ?) * (Complex.I * x) := by
    ext i
    simp only [Pi.smul_apply, Pi.add_apply, smul_eq_mul]
    -- RHS = c.re * xi + c.im * (I * xi) = (c.re + c.im * I) * xi = c * xi
    trans ((c.re : ?) + (c.im : ?) * Complex.I) * x i
    * exact (Complex.re_add_im c).symm |> rfl
    * ring
  rw [hc, effectPairingPolar_add_left, hre, him, hI]
  have hstar : star c = (c.re : ?) + (c.im : ?) * (-Complex.I) := by
    apply Complex.ext <|>
    simp [Complex.mul_re, Complex.mul_im, Complex.add_re, Complex.add_im,
      Complex.neg_re, Complex.neg_im, Complex.I_re, Complex.I_im,
```



```

      Complex.ofReal_re, Complex.ofReal_im, Complex.conj_re, Complex.conj_im]
rw [hstar]; ring

```

#### 4.4.1015 Polarised effect pairing of a scalar multiple, in the right argument

**Statement.** For a natural number  $A$ , a complex number  $c$ , indexes  $x, y$ : the polarised effect pairing of the double dual effect pairing of  $F, x, c \cdot y$  equals the product of  $c$  and the polarised effect pairing of  $\text{doubleDualEffectPairing } F, x, y$ .

**Proof.** The claim follows from a chain of equalities (or inequalities). The key step rewrites with the usual algebraic identities.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/BornExpectation](#)  
**Ext.lean**

```

theorem effectPairingPolar_smul_right {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (c : ?) (x y : Fin A -> ?) :
  effectPairingPolar (doubleDualEffectPairing F) x (c * y) =
    c * effectPairingPolar (doubleDualEffectPairing F) x y := by
  have h1 := effectPairingPolar_conj_symm F x (c * y)
  have h2 := effectPairingPolar_smul_left F c y x
  have h3 := effectPairingPolar_conj_symm F x y
  calc effectPairingPolar (doubleDualEffectPairing F) x (c * y)
    = star (effectPairingPolar (doubleDualEffectPairing F) (c * y) x) := h1.symm
    _ = star (star c * effectPairingPolar (doubleDualEffectPairing F) y x) := by rw [
      h2]
    _ = star (effectPairingPolar (doubleDualEffectPairing F) y x) * star (star c) :=
      by
        rw [star_mul]
    _ = star (effectPairingPolar (doubleDualEffectPairing F) y x) * c := by
        rw [star_star]
    _ = c * star (effectPairingPolar (doubleDualEffectPairing F) y x) := mul_comm _ _
    _ = c * effectPairingPolar (doubleDualEffectPairing F) x y := by rw [h3]

```

#### 4.4.1016 Polarised effect pairing of zero, in the right argument

**Statement.** For a natural number  $A$ , an index  $x$ : the polarised effect pairing of the double dual effect pairing of  $F$  and  $x$  at  $0$  equals  $0$ .

**Proof.** The claim follows directly from the definitions of the objects involved.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/BornExpectation](#)  
**Ext.lean**

```

theorem effectPairingPolar_zero_right {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (x : Fin A -> ?) :
  effectPairingPolar (doubleDualEffectPairing F) x 0 = 0 := by
  have h := effectPairingPolar_conj_symm F 0 x
  have h0 := effectPairingPolar_zero_left F x
  have : star (effectPairingPolar (doubleDualEffectPairing F) x 0) = 0 := by
    rw [h, h0]
  exact (star_eq_zero.mp this)

```

#### 4.4.1017 Polarised effect pairing of a finite sum, in the left argument

**Statement.** For a natural number  $A$ , indexes  $v, y$ : the polarised effect pairing of the double dual effect pairing of  $F$ , the single-entry element of  $i$  at  $1$  scaled by  $\sum i \in s, v i, y$  equals the product of  $\sum i \in s, \text{star } (v i)$  and the polarised effect pairing of  $\text{doubleDualEffectPairing } F, \text{Pi.single } i 1, y$ .

**Proof.** The argument proceeds by induction. The key step rewrites with the polarised effect pairing of zero, in the left argument, standard identities for finite sums, the polarised effect pairing of a sum, in the left argument and the polarised effect pairing of a scalar multiple, in the left argument.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornExpectation`  
**Ext.lean**

```
theorem effectPairingPolar_sum_left {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (s : Finset (Fin A)) (v : Fin A -> ?) (y : Fin A -> ?) :
  effectPairingPolar (doubleDualEffectPairing F)
    (? i in s, v i * Pi.single i (1 : ?)) y =
    ? i in s, star (v i) * effectPairingPolar (doubleDualEffectPairing F)
      (Pi.single i (1 : ?)) y := by
  classical
  induction s using Finset.induction_on with
  | empty => simp [effectPairingPolar_zero_left]
  | insert i s hs ih =>
    simp only [Finset.sum_insert hs]
    rw [effectPairingPolar_add_left, effectPairingPolar_smul_left, ih]
```

#### 4.4.1018 Polarised effect pairing of a finite sum, in the right argument

**Statement.** For a natural number  $A$ , indexes  $x, w$ : the polarised effect pairing of the double dual effect pairing of  $F, x$ , the single-entry element of  $j$  at  $1$  scaled by  $\sum j \in s, w j$  equals the product of  $\sum j \in s, w j$  and the polarised effect pairing of  $\text{doubleDualEffectPairing } F, x, \text{Pi.single } j 1$ .

**Proof.** The argument proceeds by induction. The key step rewrites with the polarised effect pairing of zero, in the right argument, standard identities for finite sums, the polarised effect pairing of a sum, in the right argument and the polarised effect pairing of a scalar multiple, in the right argument.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornExpectation`  
**Ext.lean**

```
theorem effectPairingPolar_sum_right {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (s : Finset (Fin A)) (x : Fin A -> ?) (w : Fin A -> ?) :
  effectPairingPolar (doubleDualEffectPairing F) x
    (? j in s, w j * Pi.single j (1 : ?)) =
    ? j in s, w j * effectPairingPolar (doubleDualEffectPairing F) x
      (Pi.single j (1 : ?)) := by
  classical
  induction s using Finset.induction_on with
  | empty => simp [effectPairingPolar_zero_right]
  | insert j s hs ih =>
    simp only [Finset.sum_insert hs]
```

```
rw [effectPairingPolar_add_right, effectPairingPolar_smul_right, ih]
```

#### 4.4.1019 Born scalars of $1 \rightarrow 1$ maps are real and lie in $[0, 1]$

**Statement.** Born scalars of  $1 \rightarrow 1$  maps are real and lie in  $[0, 1]$ . Formally:  $0 \leq (\text{bornScalar } \chi).re \wedge (\text{bornScalar } \chi).im = 0 \wedge (\text{bornScalar } \chi).re \leq 1$ .

**Proof.** Each component of the claim is established separately. The key step rewrites with standard identities for matrices, the definition of the Born-rule scalar and standard identities for finite indices.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean](#)

```
theorem bornScalar_nonneg (chi : Superoperator 1 1) :
  0 <= (bornScalar chi).re /\ (bornScalar chi).im = 0 /\ (bornScalar chi).re
  <= 1 := by
  have hpsd := CPMat.applyMat_posSemidef chi.cp Matrix.PosSemidef.one
  have htr :=
    chi.trace_nonincreasing (1 : Matrix (Fin 1) (Fin 1) ?) Matrix.PosSemidef.one
  have ht1 : (Matrix.trace (1 : Matrix (Fin 1) (Fin 1) ?)).re = 1 := by
    simp [Matrix.trace_one]
  have heq : bornScalar chi = Matrix.trace (chi.cp.applyMat 1) := by
    simp [bornScalar, Matrix.trace, Fin.default_eq_zero]
  have hnn := Matrix.PosSemidef.trace_nonneg hpsd
  rw [heq]
  exact <(Complex.nonneg_iff.mp hnn).1, (Complex.nonneg_iff.mp hnn).2.symm,
    by simpa [ht1] using htr>
```

#### 4.4.1020 The Born-rule scalar equals the Choi matrix

**Statement.** For a superoperator  $\psi$ : the Born-rule scalar of  $\psi$  equals  $\psi.cp.choi (0, 0) (0, 0)$ .

**Proof.** The key step rewrites with the definition of the Born-rule scalar, the Choi matrix of the Kraus presentation and standard identities for matrices.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean](#)

```
theorem bornScalar_eq_choi (psi : Superoperator 1 1) :
  bornScalar psi = psi.cp.choi (0, 0) (0, 0) := by
  have h := KrausFamily.applyMat_apply (CPMap.toKraus psi.cp) 1 0 0
  simp only [bornScalar]
  change KrausFamily.applyMat (CPMap.toKraus psi.cp) 1 0 0 =
    psi.cp.choi (0, 0) (0, 0)
  rw [h, CPMat.choi_toKraus]
  simp [Matrix.one_apply]
```

#### 4.4.1021 Summability of the Born-rule scalar

**Statement.** For a superoperator  $\chi$ : if the family  $f$  sums to  $\chi$ , then the family  $\text{fun } i \Rightarrow \text{bornScalar } (f \ i)$  sums to  $\text{bornScalar } \chi$ .

**Proof.** The goal is closed by simplification with the defining equations.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean](#)

```
theorem bornScalar_hasSum {? : Type} [Countable ?]
  {f : ? -> Superoperator 1 1} {chi : Superoperator 1 1}
  (h : SigmaMon.ChoiSum.HasSum f chi) :
  HasSum (fun i => bornScalar (f i)) (bornScalar chi) := by
  simpa only [bornScalar_eq_choi] using
    (Pi.hasSum.mp (Pi.hasSum.mp h <0, 0>) <0, 0>)
```

#### 4.4.1022 Summability of the map determined by an effect, at a sum

**Statement.** For a natural number  $A$ , matrixes  $E, F$ : if  $E$  is positive semidefinite;  $F$  is positive semidefinite;  $E \leq 1$ ; and  $F \leq 1$ , then the family  $\text{fun } i \text{ sums to } \text{ofEffect } (E + F) \text{ (hE.add hF) hEF}$ .

**Proof.** The goal is simplified using standard identities for finite types and congruence of function application.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean](#)

```
theorem ofEffect_hasSum_add {A : Nat}
  (E F : Matrix (Fin A) (Fin A) ?)
  (hE : E.PosSemidef) (hF : F.PosSemidef)
  (hE1 : E <= 1) (hF1 : F <= 1) (hEF : E + F <= 1) :
  SigmaMon.ChoiSum.HasSum
    (fun i : Bool => if i then ofEffect E hE hE1 else ofEffect F hF hF1)
    (ofEffect (E + F) (hE.add hF) hEF) := by
  let fChoi : Bool -> Matrix (Fin 1 x Fin A) (Fin 1 x Fin A) ? :=
    fun i => (if i then ofEffect E hE hE1 else ofEffect F hF hF1).cp.choi
  have hsum : HasSum fChoi (? i : Bool, fChoi i) :=
    hasSum_sum_of_ne_finset_zero (s := Finset.univ)
    (fun i hi => (hi (Finset.mem_univ i)).elim)
  have hchoi := ofEffect_add_choi E F hE hF hEF hE1 hF1
  have htotal : ? i : Bool, fChoi i =
    (ofEffect (E + F) (hE.add hF) hEF).cp.choi := by
    simp only [fChoi, Fintype.sum_bool, reduceIte]
    exact (congrArg CPMMap.choi hchoi).symm
  change HasSum fChoi _
  rwa [ <- htotal]
```

#### 4.4.1023 Summability of the effect pack, at a sum

**Statement.** For a natural number  $A$ , matrixes  $E, F$ : if  $E$  is positive semidefinite;  $F$  is positive semidefinite;  $E \leq 1$ ; and  $F \leq 1$ , then the family  $\text{fun } i \text{ sums to } \text{effectPack } A \text{ (ofEffect } (E + F) \text{ (hE.add hF) hEF)}$ .

**Proof.** The goal is simplified using the definition of the effect pack and the definition of the dual fiber bilinear map.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean](#)

```

theorem effectPack_hasSum_add {A : Nat}
  (E F : Matrix (Fin A) (Fin A) ?)
  (hE : E.PosSemidef) (hF : F.PosSemidef)
  (hE1 : E <= 1) (hF1 : F <= 1) (hEF : E + F <= 1) :
  ((DayNegation.neg (representable A)).obj 1).HasSum
    (fun i : Bool =>
      effectPack A (if i then ofEffect E hE hE1 else ofEffect F hF hF1))
  (effectPack A (ofEffect (E + F) (hE.add hF) hEF)) := by
have hchi :=
  SigmaMon.ChoiSum.comp_right (Superoperator.tensorLeftUnitor A)
    (ofEffect_hasSum_add E F hE hF hE1 hF1 hEF)
simp [effectPack, dualFiberBilinear] using
  (dayInternalHomRepresentableIso A dayTensorUnit).inv.map_sum hchi

```

#### 4.4.1024 Double-dual Born reading is additive on Loewner-summable effects

**Statement.** Double-dual Born reading is additive on Loewner-summable effects.

**Proof.** The key step rewrites with the definition of the effect expectation, the definition of the double dual effect pairing, the fact that addition for finitely supported sums is commutative and the fact that precomposition by a fixed superoperator preserves every defined Choi sum.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean](#)

```

theorem effectExpectation_add_doubleDual {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (E G : Matrix (Fin A) (Fin A) ?)
  (hE : E.PosSemidef) (hG : G.PosSemidef)
  (hE1 : E <= 1) (hG1 : G <= 1) (hEG : E + G <= 1) :
  effectExpectation (doubleDualEffectPairing F) (E + G) (hE.add hG) hEG =
    effectExpectation (doubleDualEffectPairing F) E hE hE1 +
    effectExpectation (doubleDualEffectPairing F) G hG hG1 := by
simp only [effectExpectation]
set a := doubleDualEffectPairing F
have hF :=
  F.map_sum_right (Superoperator.identity 1)
    (effectPack_hasSum_add E G hE hG hE1 hG1 hEG)
have ha :
  SigmaMon.ChoiSum.HasSum
    (fun i : Bool =>
      a (if i then ofEffect E hE hE1 else ofEffect G hG hG1))
    (a (ofEffect (E + G) (hE.add hG) hEG)) := by
simp only [a, doubleDualEffectPairing]
exact SigmaMon.ChoiSum.comp_right _
  (SigmaMon.ChoiSum.comp_right _ hF)
have ht := (bornScalar_hasSum ha).tsum_eq
rw [tsum_bool] at ht
simp [add_comm] using ht.symm

```

#### 4.4.1025 Effect expectation of the nonnegativity of the double dual

**Statement.** For a natural number  $A$ , a matrix  $E$ : if  $E$  is positive semidefinite and  $E \leq 1$ , then an explicit expression in the effect expectation, the double dual effect pairing and the  $h \leq 1$  equals 0.

**Proof.** Each component of the claim is established separately.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean](#)

```
theorem effectExpectation_nonneg_doubleDual {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (E : Matrix (Fin A) (Fin A) ?)
  (hE : E.PosSemidef) (hE1 : E <= 1) :
  0 <= (effectExpectation (doubleDualEffectPairing F) E hE hE1).re /\
    (effectExpectation (doubleDualEffectPairing F) E hE hE1).im = 0 := by
  have h :=
    bornScalar_nonneg (doubleDualEffectPairing F (ofEffect E hE hE1))
  exact <h.1, h.2.1>
```

#### 4.4.1026 Monotonicity of the double-dual Born reading on the Loewner order

**Statement.** Monotonicity of the double-dual Born reading on the Loewner order.

**Proof.** The key step rewrites with the characterization of the order for subnormalized density matrices, the usual algebraic identities, the definition of the effect expectation and standard identities for complex numbers. The remaining inequalities follow by linear arithmetic.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean](#)

```
theorem effectExpectation_mono_doubleDual {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (E G : Matrix (Fin A) (Fin A) ?)
  (hE : E.PosSemidef) (hG : G.PosSemidef)
  (hE1 : E <= 1) (hG1 : G <= 1) (hle : E <= G) :
  (effectExpectation (doubleDualEffectPairing F) E hE hE1).re <=
    (effectExpectation (doubleDualEffectPairing F) G hG hG1).re := by
  have hdiff : (G - E).PosSemidef := Matrix.le_iff.mp hle
  have hLE_diff_G : G - E <= G := by
    rw [Matrix.le_iff, sub_sub_cancel]
  exact hE
  have hdiff_le : G - E <= 1 := hLE_diff_G.trans hG1
  have hsum_eq : E + (G - E) = G := add_sub_cancel _ _
  have hEG : E + (G - E) <= 1 := by simpa [hsum_eq] using hG1
  have hadd :=
    effectExpectation_add_doubleDual F E (G - E) hE hdiff hE1 hdiff_le hEG
  have hn :=
    effectExpectation_nonneg_doubleDual F (G - E) hdiff hdiff_le
  have hbG :
    effectExpectation (doubleDualEffectPairing F)
      (E + (G - E)) (hE.add hdiff) hEG =
    effectExpectation (doubleDualEffectPairing F) G hG hG1 := by
    simp only [effectExpectation, hsum_eq]
  have hre := congrArg Complex.re (hbG.symm.trans hadd)
```

```
simp only [Complex.add_re] at hre
linarith [hn.1]
```

#### 4.4.1027 Halving homogeneity of the double-dual Born reading

**Statement.** Halving homogeneity of the double-dual Born reading.

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the characterization of the order for subnormalized density matrices, the definition of the  $e_2$ , standard identities for matrices and the definition of the effect expectation. The remaining identity is a polynomial identity in a commutative ring.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean](#)

```
theorem effectExpectation_half_doubleDual {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (E : Matrix (Fin A) (Fin A) ?)
  (hE : E.PosSemidef) (hE1 : E <= 1) :
  effectExpectation (doubleDualEffectPairing F) E hE hE1 =
    (2 : ?) *
      effectExpectation (doubleDualEffectPairing F)
        (((2 : ?)^-1) * E)
        (hE.smul (by norm_num : (0 : ?) <= (2 : ?)^-1))
    (by
      have hhalf : ((2 : ?)^-1) * E <= E := by
        rw [Matrix.le_iff]
        have :
          E - ((2 : ?)^-1) * E = ((1 : ?) - (2 : ?)^-1) * E := by
            ext i j
            simp [Matrix.sub_apply, Matrix.smul_apply]
            ring
          rw [this]
          exact hE.smul
            (by norm_num : (0 : ?) <= (1 : ?) - (2 : ?)^-1)
        exact hhalf.trans hE1 := by
      set E2 : Matrix (Fin A) (Fin A) ? := ((2 : ?)^-1) * E
      have hE2psd : E2.PosSemidef :=
        hE.smul (by norm_num : (0 : ?) <= (2 : ?)^-1)
      have hE2le : E2 <= 1 := by
        have hhalf : E2 <= E := by
          rw [Matrix.le_iff]
          have : E - E2 = ((1 : ?) - (2 : ?)^-1) * E := by
            ext
            simp [E2, Matrix.sub_apply, Matrix.smul_apply]
            ring
          rw [this]
          exact hE.smul (by norm_num : (0 : ?) <= (1 : ?) - (2 : ?)^-1)
        exact hhalf.trans hE1
      have hsum : E2 + E2 = E := by
        ext
        simp [E2, Matrix.add_apply, Matrix.smul_apply]
        ring
      have hE2E2 : E2 + E2 <= 1 := by simpa [hsum] using hE1
      have hadd :=
```

```

    effectExpectation_add_doubleDual F E2 E2 hE2psd hE2psd hE2le hE2le hE2E2
have hcongr :
    effectExpectation (doubleDualEffectPairing F) (E2 + E2)
      (hE2psd.add hE2psd) hE2E2 =
    effectExpectation (doubleDualEffectPairing F) E hE hE1 := by
    simp only [effectExpectation, hsum]
rw [ <- hcongr, hadd]
ring

```

#### 4.4.1028 Proof irrelevance for the map determined by an effect of the proof

**Statement.** For a natural number  $A$ , a matrix  $E$ : if  $E$  is positive semidefinite and  $E \leq 1$ , then the map determined by an effect of  $E$ ,  $h1$ ,  $h2$  equals the map determined by an effect of  $E$ ,  $h1'$ ,  $h2'$ .

**Proof.** Both sides are compared pointwise (by extensionality). It follows from the extensionality for superoperators and the extensionality for completely positive maps.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean](#)

```

theorem ofEffect_proof_irrel {A : Nat} (E : Matrix (Fin A) (Fin A) ?)
  (h1 h1' : E.PosSemidef) (h2 h2' : E <= 1) :
  ofEffect E h1 h2 = ofEffect E h1' h2' := by
  apply Superoperator.ext
  apply CMap.ext
  rfl

```

#### 4.4.1029 The scalar multiplication is bounded by itself, when it is at most one

**Statement.** For a natural number  $A$ , a matrix  $E$ , a real number  $c$ : if  $E$  is positive semidefinite;  $0 \leq c$ ; and  $c \leq 1$ , then  $(c \cdot E) \leq E$ .

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the characterization of the order for subnormalized density matrices, standard identities for matrices and the hypothesis that  $E$  is positive semidefinite.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean](#)

```

theorem smul_le_self_of_le_one {A : Nat} (E : Matrix (Fin A) (Fin A) ?)
  (hE : E.PosSemidef) (c : ?) (_hc0 : 0 <= c) (hc1 : c <= 1) :
  (c * E) <= E := by
  rw [Matrix.le_iff]
  have : E - c * E = (1 - c) * E := by
    ext
    simp [Matrix.sub_apply, Matrix.smul_apply]
    ring
  rw [this]
  exact hE.smul (sub_nonneg.mpr hc1)

```



#### 4.4.1030 The scalar multiplication is at most one when the of is at most one

**Statement.** For a natural number A, a matrix E, a real number c: if E is positive semidefinite;  $E \leq 1$ ;  $0 \leq c$ ; and  $c \leq 1$ , then  $(c \cdot E) \leq (1 : \text{Matrix (Fin A) (Fin A) } \mathbb{C})$ .

**Proof.** The proof term combines the facts named in it directly.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean](#)

```
theorem smul_le_one_of_le_one {A : Nat} (E : Matrix (Fin A) (Fin A) ?)
  (hE : E.PosSemidef) (hE1 : E <= 1) (c : ?) (hc0 : 0 <= c) (hc1 : c <= 1) :
  (c * E) <= (1 : Matrix (Fin A) (Fin A) ?) :=
  (smul_le_self_of_le_one E hE c hc0 hc1).trans hE1
```

#### 4.4.1031 The two power inverse nonnegativity

**Statement.** For a natural number k:  $0 \leq (2 \wedge k)^{-1}$ . Formally:  $0 \leq (2 \wedge k)^{-1}$ .

**Proof.** The proof term combines the facts named in it directly.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean](#)

```
theorem two_pow_inv_nonneg (k : Nat) : (0 : ?) <= ((2 : ?) ^ k)^-1 :=
  inv_nonneg.mpr (pow_nonneg (by norm_num) k)
```

#### 4.4.1032 The two of a power of an inverse is at most one

**Statement.** For a natural number k:  $(2 \wedge k)^{-1} \leq 1$ . Formally:  $(2 \wedge k)^{-1} \leq 1$ .

**Proof.** This is an instance of the usual algebraic identities.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean](#)

```
theorem two_pow_inv_le_one (k : Nat) : ((2 : ?) ^ k)^-1 <= (1 : ?) :=
  inv_le_one_of_one_le_0 (one_le_pow_0 (by norm_num : (1 : ?) <= 2))
```

#### 4.4.1033 $\beta(0) = 0$ from additivity

**Statement.**  $\beta(0) = 0$  from additivity.

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the characterization of the order for subnormalized density matrices, the usual algebraic identities, the definition of the effect expectation and standard identities for complex numbers.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean](#)

```
theorem effectExpectation_zero_doubleDual {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier) :
  effectExpectation (doubleDualEffectPairing F)
  (0 : Matrix (Fin A) (Fin A) ?) PosSemidef.zero
```

```

      (by rw [Matrix.le_iff, sub_zero]; exact PosSemidef.one) = 0 := by
set z : Matrix (Fin A) (Fin A) ? := 0
have hzpsd : z.PosSemidef := PosSemidef.zero
have hzle : z <= 1 := by rw [Matrix.le_iff, sub_zero]; exact PosSemidef.one
have hz2 : z + z = z := by simp [z]
have hz2le : z + z <= 1 := by simpa [hz2] using hzle
have hadd :=
  effectExpectation_add_doubleDual F z z hzpsd hzpsd hzle hzle hz2le
have hcongr :
  effectExpectation (doubleDualEffectPairing F) (z + z)
    (hzpsd.add hzpsd) hz2le =
    effectExpectation (doubleDualEffectPairing F) z hzpsd hzle := by
  simp only [effectExpectation, hz2]
have heq :
  effectExpectation (doubleDualEffectPairing F) z hzpsd hzle =
    effectExpectation (doubleDualEffectPairing F) z hzpsd hzle +
    effectExpectation (doubleDualEffectPairing F) z hzpsd hzle :=
  hcongr.symm.trans hadd
have him := (effectExpectation_nonneg_doubleDual F z hzpsd hzle).2
have hre0 : (effectExpectation (doubleDualEffectPairing F) z hzpsd hzle).re = 0 :=
  by
  have hre := congrArg Complex.re heq
  simp only [Complex.add_re] at hre
  linarith
have hb0 : effectExpectation (doubleDualEffectPairing F) z hzpsd hzle = 0 :=
  Complex.ext hre0 him
simpa [z, effectExpectation] using hb0

```

#### 4.4.1034 N-homogeneity of the double-dual Born reading

**Statement.** N-homogeneity of the double-dual Born reading.

**Proof.** By induction on the natural number  $n$ . For zero, the claim is checked directly; for a successor, the claim follows from the induction hypothesis. The key step rewrites with the characterization of the order for subnormalized density matrices, the usual algebraic identities, the definition of the effect expectation and the  $\beta(0) = 0$  from additivity. The remaining identity is a polynomial identity in a commutative ring.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean](#)

```

theorem effectExpectation_nsmul_doubleDual {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (n : Nat) (E : Matrix (Fin A) (Fin A) ?)
  (hE : E.PosSemidef) (hE1 : E <= 1)
  (hn : ((n : ?) * E) <= 1) :
  effectExpectation (doubleDualEffectPairing F)
    ((n : ?) * E) (hE.smul (Nat.cast_nonneg n)) hn =
    (n : ?) *
    effectExpectation (doubleDualEffectPairing F) E hE hE1 := by
induction n with
| zero =>
  have hmat : ((0 : Nat) : ?) * E = (0 : Matrix (Fin A) (Fin A) ?) := by simp
  have hL :
    effectExpectation (doubleDualEffectPairing F)
      (((0 : Nat) : ?) * E) (hE.smul (Nat.cast_nonneg 0)) hn =

```

```

    effectExpectation (doubleDualEffectPairing F)
      (0 : Matrix (Fin A) (Fin A) ?) PosSemidef.zero
      (by rw [Matrix.le_iff, sub_zero]; exact PosSemidef.one) := by
    simp only [effectExpectation, hmat]
    rw [hL, effectExpectation_zero_doubleDual F]
    simp
| succ n ih =>
  have hnE : ((n : ?) * E) <= ((n + 1 : Nat) : ?) * E := by
    rw [Matrix.le_iff]
    have : ((n + 1 : Nat) : ?) * E - (n : ?) * E = E := by
      ext
      simp [Matrix.sub_apply, Matrix.smul_apply, Nat.cast_succ]
      ring
    rw [this]
    exact hE
  have hn_le : ((n : ?) * E) <= 1 := hnE.trans hn
  have hsum : ((n : ?) * E) + E = ((n + 1 : Nat) : ?) * E := by
    ext
    simp [Matrix.add_apply, Matrix.smul_apply, Nat.cast_succ]
    ring
  have hsum_le : ((n : ?) * E) + E <= 1 := by simpa [hsum] using hn
  have hadd :=
    effectExpectation_add_doubleDual F ((n : ?) * E) E
    (hE.smul (Nat.cast_nonneg n)) hE hn_le hE1 hsum_le
  have ih' := ih hn_le
  calc
    effectExpectation (doubleDualEffectPairing F)
      (((n + 1 : Nat) : ?) * E) (hE.smul (Nat.cast_nonneg _)) hn =
      effectExpectation (doubleDualEffectPairing F)
        (((n : ?) * E) + E)
        ((hE.smul (Nat.cast_nonneg n)).add hE) hsum_le := by
      simp only [effectExpectation, hsum]
    _ = effectExpectation (doubleDualEffectPairing F)
      ((n : ?) * E) (hE.smul (Nat.cast_nonneg n)) hn_le +
      effectExpectation (doubleDualEffectPairing F) E hE hE1 := hadd
    _ = (n : ?) * effectExpectation (doubleDualEffectPairing F) E hE hE1 +
      effectExpectation (doubleDualEffectPairing F) E hE hE1 := by rw [ih']
    _ = ((n + 1 : Nat) : ?) *
      effectExpectation (doubleDualEffectPairing F) E hE hE1 := by
      simp [Nat.cast_succ]
      ring

```

#### 4.4.1035 Invert the half-homogeneity identity

**Statement.** Invert the half-homogeneity identity.

**Proof.** It follows from the fact that observational equality is symmetric. The remaining identity is a polynomial identity in a commutative ring.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean](#)

```

theorem effectExpectation_of_half {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A)))) .obj 1).Carrier)
  (E : Matrix (Fin A) (Fin A) ?)

```

```

(hE : E.PosSemidef) (hE1 : E <= 1) :
effectExpectation (doubleDualEffectPairing F)
  (((2 : ?)^-1 * E)
  (hE.smul (by norm_num : (0 : ?) <= (2 : ?)^-1))
  (smul_le_one_of_le_one E hE hE1 (2 : ?)^-1 (by norm_num) (by norm_num))) =
(2 : ?)^-1 *
  effectExpectation (doubleDualEffectPairing F) E hE hE1 := by
have h := effectExpectation_half_doubleDual F E hE hE1
apply_fun (fun z : ? => (2 : ?)^-1 * z) at h
convert h.symm using 1
ring

```

#### 4.4.1036 Dyadic power-of-two homogeneity: $\beta(E/2^k) = \beta(E)/2^k$

**Statement.** Dyadic power-of-two homogeneity:  $\beta(E/2^k) = \beta(E)/2^k$ .

**Proof.** By induction on the natural number  $k$ . For zero, the claim is checked directly; for a successor, the claim follows from the induction hypothesis. The key step rewrites with the usual algebraic identities and the definition of the effect expectation. The remaining identity is a polynomial identity in a commutative ring.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean](#)

```

theorem effectExpectation_div_pow_two {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (k : Nat) (E : Matrix (Fin A) (Fin A) ?)
  (hE : E.PosSemidef) (hE1 : E <= 1) :
effectExpectation (doubleDualEffectPairing F)
  (((2 : ?) ^ k)^-1 * E)
  (hE.smul (two_pow_inv_nonneg k))
  (smul_le_one_of_le_one E hE hE1 _ (two_pow_inv_nonneg k) (two_pow_inv_le_one k)) =
  ((2 : ?) ^ k)^-1 *
    effectExpectation (doubleDualEffectPairing F) E hE hE1 := by
induction k with
| zero => simp [pow_zero, inv_one, one_smul]
| succ k ih =>
  have hE_k_psd : (((2 : ?) ^ k)^-1 * E).PosSemidef :=
    hE.smul (two_pow_inv_nonneg k)
  have hE_k_le : ((2 : ?) ^ k)^-1 * E <= 1 :=
    smul_le_one_of_le_one E hE hE1 _ (two_pow_inv_nonneg k) (two_pow_inv_le_one k)
  have hmat : ((2 : ?) ^ (k + 1))^-1 * E =
    ((2 : ?)^-1 * (((2 : ?) ^ k)^-1 * E) := by
    have : ((2 : ?) ^ (k + 1))^-1 = (2 : ?)^-1 * ((2 : ?) ^ k)^-1 := by
      rw [pow_succ, mul_inv]
    ring
  rw [this, mul_smul]
calc
  effectExpectation (doubleDualEffectPairing F)
    (((2 : ?) ^ (k + 1))^-1 * E)
    (hE.smul (two_pow_inv_nonneg (k + 1)))
    (smul_le_one_of_le_one E hE hE1 _ (two_pow_inv_nonneg (k + 1))
      (two_pow_inv_le_one (k + 1))) =
    effectExpectation (doubleDualEffectPairing F)

```

```

      (((2 : ?)^-1) * (((2 : ?) ^ k)^-1 * E))
      (hE_k_psd.smul (by norm_num : (0 : ?) <= (2 : ?)^-1))
      (smul_le_one_of_le_one _ hE_k_psd hE_k_le (2 : ?)^-1
        (by norm_num) (by norm_num)) := by
    simp only [effectExpectation, hmat]
  _ = (2 : ?)^-1 *
    effectExpectation (doubleDualEffectPairing F)
      (((2 : ?) ^ k)^-1 * E) hE_k_psd hE_k_le :=
    effectExpectation_of_half F _ hE_k_psd hE_k_le
  _ = (2 : ?)^-1 *
    (((2 : ?) ^ k)^-1 *
      effectExpectation (doubleDualEffectPairing F) E hE hE1) := by
    rw [ih]
  _ = ((2 : ?) ^ (k + 1))^-1 *
    effectExpectation (doubleDualEffectPairing F) E hE hE1 := by
    simp only [pow_succ, mul_inv]
  ring

```

#### 4.4.1037 Dyadic rational homogeneity: $\beta((m/2^k) \cdot E) = (m/2^k) \cdot \beta(E)$ when scaled $\leq I$

**Statement.** Dyadic rational homogeneity:  $\beta((m/2^k) \cdot E) = (m/2^k) \cdot \beta(E)$  when scaled  $\leq I$ .

**Proof.** The claim follows from a chain of equalities (or inequalities). The key step rewrites with the usual algebraic identities and the definition of the effect expectation. The remaining identity is a polynomial identity in a commutative ring.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean](#)

```

theorem effectExpectation_dyadic_doubleDual {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (m k : Nat) (E : Matrix (Fin A) (Fin A) ?)
  (hE : E.PosSemidef) (hE1 : E <= 1)
  (hm : (((m : ?) / (2 : ?) ^ k) * E) <= 1) :
  effectExpectation (doubleDualEffectPairing F)
    (((m : ?) / (2 : ?) ^ k) * E)
    (hE.smul (div_nonneg (Nat.cast_nonneg m) (pow_nonneg (by norm_num) k)))
  hm =
    ((m : ?) / (2 : ?) ^ k) *
      effectExpectation (doubleDualEffectPairing F) E hE hE1 := by
  have hmat : (((m : ?) / (2 : ?) ^ k) * E =
    (m : ?) * (((2 : ?) ^ k)^-1 * E) := by
    rw [div_eq_mul_inv, mul_smul]
  have hEk_psd : (((2 : ?) ^ k)^-1 * E).PosSemidef :=
    hE.smul (two_pow_inv_nonneg k)
  have hEk_le : ((2 : ?) ^ k)^-1 * E <= 1 :=
    smul_le_one_of_le_one E hE hE1 _ (two_pow_inv_nonneg k) (two_pow_inv_le_one k)
  have hm' : ((m : ?) * (((2 : ?) ^ k)^-1 * E)) <= 1 := by simp [hmat] using hm
  have hb_half := effectExpectation_div_pow_two F k E hE hE1
  have hb_n :=
    effectExpectation_nsmul_doubleDual F m (((2 : ?) ^ k)^-1 * E) hEk_psd hEk_le hm'
  calc
    effectExpectation (doubleDualEffectPairing F)
      (((m : ?) / (2 : ?) ^ k) * E)
      (hE.smul (div_nonneg (Nat.cast_nonneg m) (pow_nonneg (by norm_num) k))) hm =

```

```

effectExpectation (doubleDualEffectPairing F)
  ((m : ?) * ((2 : ?) ^ k)^-1 * E))
  (hEk_psd.smul (Nat.cast_nonneg m)) hm' := by
simp only [effectExpectation, hmat]
_ = (m : ?) *
  effectExpectation (doubleDualEffectPairing F)
    (((2 : ?) ^ k)^-1 * E) hEk_psd hEk_le := hb_n
_ = (m : ?) *
  (((2 : ?) ^ k)^-1 *
    effectExpectation (doubleDualEffectPairing F) E hE hE1) := by
rw [hb_half]
_ = ((m : ?) / (2 : ?) ^ k) *
  effectExpectation (doubleDualEffectPairing F) E hE hE1 := by
rw [div_eq_mul_inv]
ring

```

#### 4.4.1038 Monotonicity of the scalar multiplication

**Statement.** For a natural number  $A$ , a matrix  $E$ , real numbers  $c, d$ : if  $E$  is positive semidefinite;  $0 \leq c$ ; and  $c \leq d$ , then  $(c \cdot E) \leq (d \cdot E)$ .

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the characterization of the order for subnormalized density matrices, standard identities for matrices and the hypothesis that  $E$  is positive semidefinite.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean](#)

```

theorem smul_le_smul_of_le {A : Nat} (E : Matrix (Fin A) (Fin A) ?)
  (hE : E.PosSemidef) {c d : ?} (_hc : 0 <= c) (hcd : c <= d) :
  (c * E) <= (d * E) := by
  rw [Matrix.le_iff]
  have : d * E - c * E = (d - c) * E := by
    ext; simp [Matrix.sub_apply, Matrix.smul_apply]; ring
  rw [this]
  exact hE.smul (sub_nonneg.mpr hcd)

```

#### 4.4.1039 The absolute value of the order of the inverse power of the two vanishes

**Statement.** For a real number  $x$ : if for every  $k$ ,  $|x| \leq (2 \wedge k)^{-1}$ , then  $x = 0$ .

**Proof.** The hypotheses are unpacked into their constituent data. The key step rewrites with the usual algebraic identities.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean](#)

```

theorem abs_le_inv_pow_two_eq_zero (x : ?)
  (h : forall k : Nat, |x| <= ((2 : ?) ^ k)^-1) : x = 0 := by
  by_contra hx
  have hxpos : 0 < |x| := abs_pos.mpr hx
  obtain <k, hk> : exists k : Nat, (1 : ?) / |x| < (2 : ?) ^ k :=
    pow_unbounded_of_one_lt (1 / |x|) (by norm_num : (1 : ?) < 2)

```

```

have hlt : ((2 : ?) ^ k)^-1 < |x| := by
  have hpos : 0 < (2 : ?) ^ k := pow_pos (by norm_num) k
  rw [inv_lt_comm_0 hpos hxpos]
  simpa [one_div] using hk
exact lt_irrefl _ (hlt.trans_le (h k))

```

#### 4.4.1040 Order bound for the floor of the dyadic

**Statement.** For a real number  $t$ , a natural number  $k$ : if  $0 \leq t$ , then  $((\text{Nat.floor } (t * 2^k) : \mathbb{N}) : \mathbb{R}) / 2^k \leq t$ .

**Proof.** The claim follows from a chain of equalities (or inequalities).

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean](#)

```

theorem floor_dyadic_le (t : ?) (ht0 : 0 <= t) (k : Nat) :
  ((Nat.floor (t * (2 : ?) ^ k) : Nat) : ?) / (2 : ?) ^ k <= t := by
  have hpow_pos : (0 : ?) < (2 : ?) ^ k := pow_pos (by norm_num) k
  have hm : ((Nat.floor (t * (2 : ?) ^ k) : Nat) : ?) <= t * (2 : ?) ^ k :=
    Nat.floor_le (mul_nonneg ht0 (le_of_lt hpow_pos))
  calc ((Nat.floor (t * (2 : ?) ^ k) : Nat) : ?) / (2 : ?) ^ k
    <= (t * (2 : ?) ^ k) / (2 : ?) ^ k :=
      div_le_div_of_nonneg_right hm (le_of_lt hpow_pos)
  _ = t := by field_simp [hpow_pos.ne']

```

#### 4.4.1041 Floor of the dyadic gt

**Statement.** For a real number  $t$ , a natural number  $k$ :  $t \leq ((\text{Nat.floor } (t * 2^k) + 1 : \mathbb{N}) : \mathbb{R}) / 2^k$ .

**Proof.** The goal is simplified using standard identities for natural numbers.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean](#)

```

theorem floor_dyadic_gt (t : ?) (k : Nat) :
  t <= (((Nat.floor (t * (2 : ?) ^ k) + 1 : Nat) : ?) / (2 : ?) ^ k) := by
  have hpow_pos : (0 : ?) < (2 : ?) ^ k := pow_pos (by norm_num) k
  set m := Nat.floor (t * (2 : ?) ^ k)
  have hm : t * (2 : ?) ^ k < (m : ?) + 1 := by
    simpa [m, Nat.cast_add, Nat.cast_one] using Nat.lt_floor_add_one (t * (2 : ?) ^ k)
  have : t < ((m : ?) + 1) / (2 : ?) ^ k :=
    (lt_div_iff_0 hpow_pos).mpr (by linarith)
  exact le_of_lt (by simpa [Nat.cast_add, Nat.cast_one] using this)

```

#### 4.4.1042 Effect expectation of one of a scalar multiple of the double dual

**Statement.** For a natural number  $A$ , a matrix  $E$ : if  $E$  is positive semidefinite and  $E \leq 1$ , then the effect expectation equals  $\text{effectExpectation } (\text{doubleDualEffectPairing } F) E hE hE1$ .

**Proof.** The goal is simplified using the definition of the effect expectation and the usual algebraic identities.

**Lean 4 source QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean**

```
theorem effectExpectation_one_smul_doubleDual {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (E : Matrix (Fin A) (Fin A) ?)
  (hE : E.PosSemidef) (hE1 : E <= 1) :
  effectExpectation (doubleDualEffectPairing F) ((1 : ?) * E)
    (hE.smul zero_le_one) (by simp [one_smul] using hE1) =
    effectExpectation (doubleDualEffectPairing F) E hE hE1 := by
  simp only [effectExpectation, one_smul]
```

#### 4.4.1043 Dyadic gap

**Statement.** For natural numbers  $m, k$ : the difference of the sum of  $m$  and  $1 / 2^k$  and  $m / 2^k$  equals  $(2^k)^{-1}$ .

**Proof.** The goal is closed by simplification with the defining equations. The remaining identity is a polynomial identity in a commutative ring.

**Lean 4 source QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean**

```
theorem dyadic_gap (m k : Nat) :
  (((m + 1 : Nat) : ?) / (2 : ?) ^ k) - ((m : ?) / (2 : ?) ^ k) =
  ((2 : ?) ^ k)^-1 := by
  have hpow_pos : (0 : ?) < (2 : ?) ^ k := pow_pos (by norm_num) k
  have hcast : ((m + 1 : Nat) : ?) = (m : ?) + 1 := by simp
  rw [hcast]
  field_simp [hpow_pos.ne']
  ring
```

#### 4.4.1044 Homogeneity at a concrete dyadic rational written as $c = m/2^k$

**Statement.** Homogeneity at a concrete dyadic rational written as  $c = m/2^k$ .

**Proof.** The key step rewrites with the hypothesis that  $c = m / 2^k$ , the definition of the effect expectation and standard identities for complex numbers.

**Lean 4 source QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean**

```
theorem effectExpectation_ofReal_dyadic {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (m k : Nat) (c : ?) (hc : c = (m : ?) / (2 : ?) ^ k)
  (E : Matrix (Fin A) (Fin A) ?)
  (hE : E.PosSemidef) (hE1 : E <= 1)
  (hc0 : 0 <= c) (_hc1 : c <= 1)
  (hm : (c * E) <= 1) :
  effectExpectation (doubleDualEffectPairing F) (c * E) (hE.smul hc0) hm =
  (c : ?) * effectExpectation (doubleDualEffectPairing F) E hE hE1 := by
  have hm' : (((m : ?) / (2 : ?) ^ k) * E) <= 1 := by simp [hc] using hm
  have hdy := effectExpectation_dyadic_doubleDual F m k E hE hE1 hm'
  have hL :
```



```

    effectExpectation (doubleDualEffectPairing F) (c * E) (hE.smul hc0) hm =
    effectExpectation (doubleDualEffectPairing F)
      ((m : ?) / (2 : ?) ^ k) * E
      (hE.smul (div_nonneg (Nat.cast_nonneg m) (pow_nonneg (by norm_num) k)))
    hm' := by
    simp only [effectExpectation, hc]
    rw [hL, hdy, hc]
    simp [Complex.ofReal_div, Complex.ofReal_natCast, Complex.ofReal_pow]

```

#### 4.4.1045 Effect expectation of a scalar multiple of the double dual

**Statement.** For a natural number  $A$ , a real number  $t$ , a matrix  $E$ : if  $0 \leq t$ ;  $t \leq 1$ ;  $E$  is positive semidefinite; and  $E \leq 1$ , then the effect expectation equals the product of  $t$  and  $\text{effectExpectation}(\text{doubleDualEffectPairing } F) E hE hE1$ .

**Proof.** Both sides are compared pointwise (by extensionality). Each component of the claim is established separately. The hypotheses are unpacked into their constituent data. The key step rewrites with the definition of the effect expectation.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean](#)

```

theorem effectExpectation_smul_doubleDual {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (t : ?) (ht0 : 0 <= t) (ht1 : t <= 1)
  (E : Matrix (Fin A) (Fin A) ?)
  (hE : E.PosSemidef) (hE1 : E <= 1) :
  effectExpectation (doubleDualEffectPairing F) (t * E)
    (hE.smul ht0) (smul_le_one_of_le_one E hE hE1 t ht0 ht1) =
  (t : ?) * effectExpectation (doubleDualEffectPairing F) E hE hE1 := by
  set bE := effectExpectation (doubleDualEffectPairing F) E hE hE1 with hbE_def
  have hEt_psd : (t * E).PosSemidef := hE.smul ht0
  have hEt_le : t * E <= 1 := smul_le_one_of_le_one E hE hE1 t ht0 ht1
  set bt := effectExpectation (doubleDualEffectPairing F) (t * E) hEt_psd hEt_le
  have himE : bE.im = 0 := by
    simpa [bE] using (effectExpectation_nonneg_doubleDual F E hE hE1).2
  have himt : bt.im = 0 := by
    simpa [bt] using (effectExpectation_nonneg_doubleDual F (t * E) hEt_psd hEt_le).2
  have hreE_nn : 0 <= bE.re := by
    simpa [bE] using (effectExpectation_nonneg_doubleDual F E hE hE1).1
  have hbE_re_le1 : bE.re <= 1 := by
    simpa [bE, effectExpectation] using
      (bornScalar_nonneg (doubleDualEffectPairing F (ofEffect E hE hE1))).2.2
  have hclose : forall k : Nat, |bt.re - t * bE.re| <= ((2 : ?) ^ k)^-1 := by
    intro k
    set m := Nat.floor (t * (2 : ?) ^ k)
    have hpow_pos : (0 : ?) < (2 : ?) ^ k := pow_pos (by norm_num) k
    have hpow_nn : (0 : ?) <= (2 : ?) ^ k := le_of_lt hpow_pos
    set r : ? := (m : ?) / (2 : ?) ^ k
    set s0 : ? := ((m + 1 : Nat) : ?) / (2 : ?) ^ k
    set s : ? := min s0 1
    have hr_le_t : r <= t := by simpa [r, m] using floor_dyadic_le t ht0 k
    have ht_le_s0 : t <= s0 := by simpa [s0, m] using floor_dyadic_gt t k
    have ht_le_s : t <= s := le_min ht_le_s0 ht1

```

```

have hr0 : 0 <= r := div_nonneg (Nat.cast_nonneg m) hpow_nn
have hr1 : r <= 1 := by
  have hm_le : (m : ?) <= t * (2 : ?) ^ k :=
    Nat.floor_le (mul_nonneg ht0 hpow_nn)
  exact (div_le_one hpow_pos).mpr (hm_le.trans (by nlinarith [ht1]))
have hs0nn : 0 <= s :=
  le_min (div_nonneg (Nat.cast_nonneg (m + 1)) hpow_nn) zero_le_one
have hs1 : s <= 1 := min_le_right _ _
have hgap : s - r <= ((2 : ?) ^ k)^-1 := by
  have hs0r : s0 - r = ((2 : ?) ^ k)^-1 := by
    simp [r, s0] using dyadic_gap m k
  cases le_total s0 1 with
  | inl h => have := min_eq_left h; linarith
  | inr h =>
    have hs_eq : s = 1 := min_eq_right h
    have : 1 - r <= ((2 : ?) ^ k)^-1 := by
      have : 1 - r <= s0 - r := sub_le_sub_right h _
      linarith
    simp [hs_eq] using this
have hrE_le : (r * E) <= t * E := smul_le_smul_of_le E hE hr0 hr_le_t
have htE_le : t * E <= s * E := smul_le_smul_of_le E hE ht0 ht_le_s
have hsE_le1 : (s * E) <= 1 := smul_le_one_of_le_one E hE hE1 s hs0nn hs1
have hrE_le1 : (r * E) <= 1 := smul_le_one_of_le_one E hE hE1 r hr0 hr1
have hbr :
  effectExpectation (doubleDualEffectPairing F) (r * E) (hE.smul hr0) hrE_le1 =
    (r : ?) * bE := by
  simp [bE] using
    effectExpectation_ofReal_dyadic F m k r rfl E hE hE1 hr0 hr1 hrE_le1
have hbs :
  effectExpectation (doubleDualEffectPairing F) (s * E) (hE.smul hs0nn) hsE_le1
=
  (s : ?) * bE := by
  cases le_total s0 1 with
  | inl h =>
    have hs_eq : s = s0 := min_eq_left h
    -- s = (m+1)/2^k
    have hs_dy : s = ((m + 1 : Nat) : ?) / (2 : ?) ^ k := hs_eq
    simp [bE] using
      effectExpectation_ofReal_dyadic F (m + 1) k s hs_dy E hE hE1 hs0nn hs1
  | inr h =>
    have hs_eq : s = (1 : ?) := min_eq_right h
    -- b(s*E) = b(1*E) = b(E) = 1*bE = s*bE
    have hL :
      effectExpectation (doubleDualEffectPairing F) (s * E)
        (hE.smul hs0nn) hsE_le1 =
      effectExpectation (doubleDualEffectPairing F) ((1 : ?) * E)
        (hE.smul zero_le_one) (by simp [one_smul] using hE1) := by
      simp only [effectExpectation, hs_eq]
      rw [hL, effectExpectation_one_smul_doubleDual F E hE hE1, hs_eq, hbE_def]
      simp [Complex.ofReal_one]
have hmono_r :=
  effectExpectation_mono_doubleDual F (r * E) (t * E) (hE.smul hr0) hEt_psd
  hrE_le1 hEt_le hrE_le
have hmono_s :=
  effectExpectation_mono_doubleDual F (t * E) (s * E) hEt_psd (hE.smul hs0nn)

```

```

      hEt_le hsE_le1 htE_le
have hbr_re :
  (effectExpectation (doubleDualEffectPairing F) (r * E)
    (hE.smul hr0) hrE_le1).re = r * bE.re := by
  rw [hbr]; simp [Complex.mul_re, Complex.ofReal_re, Complex.ofReal_im, himE]
have hbs_re :
  (effectExpectation (doubleDualEffectPairing F) (s * E)
    (hE.smul hs0nn) hsE_le1).re = s * bE.re := by
  rw [hbs]; simp [Complex.mul_re, Complex.ofReal_re, Complex.ofReal_im, himE]
have hlow : r * bE.re <= bt.re := by simp [bt, hbr_re] using hmono_r
have hhigh : bt.re <= s * bE.re := by simp [bt, hbs_re] using hmono_s
have habs : |bt.re - t * bE.re| <= (s - r) * bE.re := by
  rw [abs_sub_le_iff]; constructor <;> nlinarith
have hgapb : (s - r) * bE.re <= ((2 : ?) ^ k)^-1 := by
  have h1 := mul_le_mul_of_nonneg_right hgap hreE_nn
  have h2 := mul_le_mul_of_nonneg_left hbE_re_le1 (inv_nonneg.mpr hpow_nn)
  nlinarith
exact habs.trans hgapb
have hre_eq : bt.re = t * bE.re := by
  have hx := abs_le_inv_pow_two_eq_zero (bt.re - t * bE.re) fun k => by
    simp [sub_eq_add_neg] using hclos k
  linarith
refine Complex.ext ?_ ?_
* have hL :
  (effectExpectation (doubleDualEffectPairing F) (t * E)
    (hE.smul ht0) (smul_le_one_of_le_one E hE hE1 t ht0 ht1)).re = bt.re := by
  simp only [bt, effectExpectation]
  rw [hL, hre_eq]
  simp [Complex.mul_re, Complex.ofReal_re, Complex.ofReal_im, himE, bE]
* have hL :
  (effectExpectation (doubleDualEffectPairing F) (t * E)
    (hE.smul ht0) (smul_le_one_of_le_one E hE hE1 t ht0 ht1)).im = bt.im := by
  simp only [bt, effectExpectation]
  rw [hL]
  simp [Complex.mul_im, Complex.ofReal_re, Complex.ofReal_im, himE, himt, bE]

```

#### 4.4.1046 The complex conjugate of a product of itself equals a squared norm

**Statement.** For a complex number  $c$ : the product of the adjoint of  $c$  and  $c$  equals  $\uparrow(\text{Complex.normSq } c)$ .

**Proof.** The goal is closed by simplification with the defining equations.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean](#)

```

theorem conj_mul_self_eq_normSq (c : ?) :
  star c * c = (Complex.normSq c) := by
  simp using (Complex.normSq_eq_conj_mul_self (z := c)).symm

```

#### 4.4.1047 The complex conjugate multiplication self real part

**Statement.** For a complex number  $c$ :  $(\text{star } c * c) . \text{re}$  equals the squared norm of  $c$ .

**Proof.** The key step rewrites with the fact that the complex conjugate of a product of itself equals a squared norm.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean](#)

```
theorem conj_mul_self_re (c : ?) : (star c * c).re = Complex.normSq c := by
  rw [conj_mul_self_eq_normSq]; simp
```

#### 4.4.1048 The complex conjugate multiplication self imaginary part

**Statement.** For a complex number  $c$ :  $(\text{star } c * c).\text{im} = 0$ . Formally:  $(\text{star } c * c).\text{im} = 0$ .

**Proof.** The key step rewrites with the fact that the complex conjugate of a product of itself equals a squared norm.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean](#)

```
theorem conj_mul_self_im (c : ?) : (star c * c).im = 0 := by
  rw [conj_mul_self_eq_normSq]; simp
```

#### 4.4.1049 Outer product of a scalar multiple of an adjoint

**Statement.** For a complex number  $a$ : the outer product of  $a \cdot v$  and the adjoint of  $a \cdot v$  equals the outer product of  $v$  and  $\text{star } v$  scaled by the product of  $a$  and the adjoint of  $a$ .

**Proof.** Both sides are compared pointwise (by extensionality). The goal is simplified using standard identities for matrices and the usual algebraic identities. The remaining identity is a polynomial identity in a commutative ring.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean](#)

```
theorem vecMulVec_smul_star {α : Type*} [Fintype α]
  (a : ?) (v : ? -> ?) :
  Matrix.vecMulVec (a * v) (star (a * v)) =
  (a * star a) * Matrix.vecMulVec v (star v) := by
  ext i j
  simp [Matrix.vecMulVec_apply, Pi.smul_apply, smul_eq_mul]
  ring
```

#### 4.4.1050 Real embedding of the square root of the square

**Statement.** For a real number  $x$ : if  $0 \leq x$ , then the product of  $\uparrow(\text{Real.sqrt } x) : \mathbb{C}$  and  $\uparrow(\text{Real.sqrt } x)$  equals  $\uparrow x$ .

**Proof.** It follows from standard identities for real numbers.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean](#)

```

theorem ofReal_sqrt_sq (x : ?) (hx : 0 <= x) :
  ((Real.sqrt x) : ?) * (Real.sqrt x) = x := by
  norm_cast; exact Real.mul_self_sqrt hx

```

#### 4.4.1051 Normalize vector of a scalar multiple of the computational-basis projector

**Statement.** For a complex number  $c$ : if  $c \neq 0$ ;  $\text{star } v \cdot v \neq 0$ ; and  $\text{star } (c \cdot v) \cdot (c \cdot v) \neq 0$ , then the outer product of the normalize vector of  $c \cdot v$  and  $\text{hcv}$  and the adjoint of  $\text{normalizeVec } (c \cdot v) \text{ hcv}$  equals the outer product of the normalize vector of  $v$  and  $\text{hv}$  and the adjoint of  $\text{normalizeVec } v \text{ hv}$ .

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the adjoint of the dot product of a scalar multiple of itself, standard identities for complex numbers, the complex conjugate multiplication self imaginary part and the complex conjugate multiplication self real part.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean](#)

```

theorem normalizeVec_smul_projector {? : Type*} [Fintype ?] [DecidableEq ?]
  (c : ?) (v : ? -> ?) (hc : c != 0)
  (hv : star v ?? v != 0) (hcv : star (c * v) ?? (c * v) != 0) :
  Matrix.vecMulVec (normalizeVec (c * v) hcv) (star (normalizeVec (c * v) hcv)) =
    Matrix.vecMulVec (normalizeVec v hv) (star (normalizeVec v hv)) := by
  have hre_v := (star_dotProduct_self_nonneg_real v).1
  have him_v := (star_dotProduct_self_nonneg_real v).2
  have hre_cv := (star_dotProduct_self_nonneg_real (c * v)).1
  have hnm_re : (star (c * v) ?? (c * v)).re =
    Complex.normSq c * (star v ?? v).re := by
    rw [star_dotProduct_smul_self, Complex.mul_re, conj_mul_self_im, him_v,
      conj_mul_self_re]; ring
  set svR : ? := Real.sqrt (star v ?? v).re
  set scvR : ? := Real.sqrt (star (c * v) ?? (c * v)).re
  set sv : ? := svR
  set scv : ? := scvR
  have hsv_ne : sv != 0 := by
    intro h
    have : (star v ?? v).re = 0 :=
      (Real.sqrt_eq_zero hre_v).1 (by simp [sv, svR] using congrArg Complex.re h)
    exact hv (Complex.ext this him_v)
  have hscv_ne : scv != 0 := by
    intro h
    have him_cv := (star_dotProduct_self_nonneg_real (c * v)).2
    have : (star (c * v) ?? (c * v)).re = 0 :=
      (Real.sqrt_eq_zero hre_cv).1 (by simp [scv, scvR] using congrArg Complex.re h)
    exact hcv (Complex.ext this him_cv)
  have hcv_proj :
    Matrix.vecMulVec (normalizeVec (c * v) hcv) (star (normalizeVec (c * v) hcv)) =
      (scv^-1 * star scv^-1) * Matrix.vecMulVec (c * v) (star (c * v)) := by
    unfold normalizeVec
    change Matrix.vecMulVec (scv^-1 * (c * v)) (star (scv^-1 * (c * v))) = _
    exact vecMulVec_smul_star scv^-1 (c * v)
  have hv_proj :
    Matrix.vecMulVec (normalizeVec v hv) (star (normalizeVec v hv)) =
      (sv^-1 * star sv^-1) * Matrix.vecMulVec v (star v) := by

```

```

unfold normalizeVec
change Matrix.vecMulVec (sv^-1 * v) (star (sv^-1 * v)) = _
exact vecMulVec_smul_star sv^-1 v
have hcv_expand :
  Matrix.vecMulVec (normalizeVec (c * v) hcv) (star (normalizeVec (c * v) hcv)) =
    ((scv^-1 * star scv^-1) * (c * star c)) * Matrix.vecMulVec v (star v) := by
  rw [hcv_proj, vecMulVec_smul_star c v, smul_smul]
have hcoef : (scv^-1 * star scv^-1) * (c * star c) = sv^-1 * star sv^-1 := by
have hcstar : c * star c = (Complex.normSq c) := by
  simp using Complex.mul_conj c
have hsv_star : star sv = sv := by simp [sv, Complex.conj_ofReal]
have hscv_star : star scv = scv := by simp [scv, Complex.conj_ofReal]
have hsv_sq : sv * sv = ((star v ?? v).re) := by
  simp [sv, svR]; exact ofReal_sqrt_sq _ hre_v
have hscv_sq : scv * scv = (Complex.normSq c) * ((star v ?? v).re) := by
  have h := ofReal_sqrt_sq (star (c * v) ?? (c * v)).re hre_cv
  have hscv_def : scv = (Real.sqrt (star (c * v) ?? (c * v)).re) := by
    simp [scv, scvR]
  rw [← hscv_def, hnm_re] at h
  simp [Complex.ofReal_mul] using h
rw [hcstar, star_inv_0, star_inv_0, hsv_star, hscv_star]
field_simp [hsv_ne, hscv_ne]
simp only [pow_two, hsv_sq, hscv_sq]
rw [hcv_expand, hcoef, hv_proj]

```

#### 4.4.1052 Quadratic effect pairing of a scalar multiple

**Statement.** For a natural number  $A$ , a superoperator  $\alpha$ , a complex number  $c$ , an index  $v$ : the quadratic effect pairing of  $\alpha$  and  $c \cdot v$  equals the product of the product of the adjoint of  $c$  and  $c$  and the quadratic effect pairing of  $\alpha$  and  $v$ .

**Proof.** The argument splits on the relevant condition. The key step rewrites with the definition of the quadratic effect pairing, the adjoint of the dot product of a scalar multiple of itself and the usual algebraic identities. The remaining identity is a polynomial identity in a commutative ring.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean](#)

```

theorem effectPairingQuad_smul {A : Nat}
  (a : Superoperator A 1 -> Superoperator 1 1) (c : ?) (v : Fin A -> ?) :
  effectPairingQuad a (c * v) =
    (star c * c) * effectPairingQuad a v := by
  simp only [effectPairingQuad]
  by_cases hv : star v ?? v = 0
  * simp [hv]
  * by_cases hcv : star (c * v) ?? (c * v) = 0
    * have : (star c * c) * (star v ?? v) = 0 := by
      simp [star_dotProduct_smul_self] using hcv
      have hc0 : star c * c = 0 := (mul_eq_zero.mp this).resolve_right hv
      rw [dite_eq_left hcv, dite_eq_right hv, hc0, zero_mul]
    * have hc0 : c != 0 := fun hc => by
      simp [hc, zero_smul] at hcv
      have hproj := normalizeVec_smul_projector c v hc0 hv hcv
      rw [dite_eq_right hcv, dite_eq_right hv, star_dotProduct_smul_self]

```

```

have hof :
  ofEffect
    (Matrix.vecMulVec (normalizeVec (c * v) hcv)
      (star (normalizeVec (c * v) hcv)))
    (Matrix.posSemidef_vecMulVec_self_star _)
    (vecMulVec_unit_le_one _ (normalizeVec_norm (c * v) hcv)) =
  ofEffect
    (Matrix.vecMulVec (normalizeVec v hv)
      (star (normalizeVec v hv)))
    (Matrix.posSemidef_vecMulVec_self_star _)
    (vecMulVec_unit_le_one _ (normalizeVec_norm v hv)) := by
  simp only [hproj]
rw [hof]
ring

```

#### 4.4.1053 Polarised effect pairing of itself

**Statement.** For a natural number  $A$ , a superoperator  $\alpha$ , an index  $v$ : the polarised effect pairing of  $\alpha$ ,  $v$ ,  $v$  equals the quadratic effect pairing of  $\alpha$  and  $v$ .

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the definition of the polarised effect pairing, the usual algebraic identities and the definition of the quadratic effect pairing. The remaining identity is a polynomial identity in a commutative ring.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean](#)

```

theorem effectPairingPolar_self {A : Nat}
  (a : Superoperator A 1 -> Superoperator 1 1) (v : Fin A -> ?) :
  effectPairingPolar a v v = effectPairingQuad a v := by
  simp only [effectPairingPolar]
  have hv2 : v + v = (2 : ?) * v := by ext; simp; ring
  have hvpi : v + Complex.I * v = (1 + Complex.I) * v := by ext; simp; ring
  have hvmi : v - Complex.I * v = (1 - Complex.I) * v := by ext; simp; ring
  have hq0 : effectPairingQuad a (v - v) = 0 := by
    simp [sub_self, effectPairingQuad]
  have hq2 := effectPairingQuad_smul a (2 : ?) v
  have hqpi := effectPairingQuad_smul a (1 + Complex.I) v
  have hqmi := effectPairingQuad_smul a (1 - Complex.I) v
  have h2 : star (2 : ?) * (2 : ?) = 4 := by norm_num
  have hpi : star (1 + Complex.I) * (1 + Complex.I) = 2 := by
    simp [star_add]; ring_nf; norm_num
  have hmi : star (1 - Complex.I) * (1 - Complex.I) = 2 := by
    simp [star_sub]; ring_nf; norm_num
  simp only [hv2, hvpi, hvmi]
  rw [hq2, hq0, hqpi, hqmi, h2, hpi, hmi]
  ring

```

#### 4.4.1054 Outer product of the parallelogram

**Statement.** The sum of the outer product of  $x + y$  and  $\text{star } (x + y)$  and the outer product of  $x - y$  and  $\text{star } (x - y)$  equals the sum of the outer product of  $x$  and  $\text{star } x$  scaled by 2 and the outer product of  $y$  and  $\text{star } y$  scaled by 2.

**Proof.** Both sides are compared pointwise (by extensionality). The goal is simplified using standard identities for matrices and the usual algebraic identities. The remaining identity is a polynomial identity in a commutative ring.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean](#)

```
theorem vecMulVec_parallelogram {? : Type*} [Fintype ?]
  (x y : ? -> ?) :
  Matrix.vecMulVec (x + y) (star (x + y)) +
  Matrix.vecMulVec (x - y) (star (x - y)) =
  (2 : ?) * Matrix.vecMulVec x (star x) +
  (2 : ?) * Matrix.vecMulVec y (star y) := by
ext i j
simp [Matrix.vecMulVec_apply, Matrix.add_apply, Matrix.smul_apply, Pi.add_apply,
  Pi.sub_apply, Pi.star_apply, smul_eq_mul, star_add, star_sub]
ring
```

#### 4.4.1055 Outer product of the parallelogram of the i

**Statement.** The sum of the outer product of  $x + \text{Complex.I} \cdot y$  and  $\text{star } (x + \text{Complex.I} \cdot y)$  and the outer product of  $x - \text{Complex.I} \cdot y$  and  $\text{star } (x - \text{Complex.I} \cdot y)$  equals the sum of the outer product of  $x$  and  $\text{star } x$  scaled by 2 and the outer product of  $y$  and  $\text{star } y$  scaled by 2.

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with standard identities for matrices, the usual algebraic identities and standard identities for complex numbers. The remaining identity is a polynomial identity in a commutative ring.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean](#)

```
theorem vecMulVec_parallelogram_I {? : Type*} [Fintype ?]
  (x y : ? -> ?) :
  Matrix.vecMulVec (x + Complex.I * y) (star (x + Complex.I * y)) +
  Matrix.vecMulVec (x - Complex.I * y) (star (x - Complex.I * y)) =
  (2 : ?) * Matrix.vecMulVec x (star x) +
  (2 : ?) * Matrix.vecMulVec y (star y) := by
ext i j
simp [Matrix.vecMulVec_apply, Matrix.add_apply, Matrix.smul_apply, Pi.add_apply,
  Pi.sub_apply, Pi.star_apply, smul_eq_mul, star_add, star_sub, star_smul]
ring_nf
-- goal has -I^2; rewrite I^2 = -1
rw [Complex.I_sq]
ring
```

#### 4.4.1056 Outer product of the multiplication vector of itself

**Statement.**  $(\text{Matrix.vecMulVec } v \text{ (star } v)) *_{\mathbf{v}} v = (\text{star } v \cdot v) \cdot v$ . Formally:  $(\text{Matrix.vecMulVec } v \text{ (star } v)) *_{\mathbf{v}} v = (\text{star } v \cdot v) \cdot v$ .

**Proof.** Both sides are compared pointwise (by extensionality). The claim follows from a chain of equalities (or inequalities). The goal is simplified using the usual algebraic identities.



**Lean 4 source QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean**

```
theorem vecMulVec_mulVec_self {α : Type*} [Fintype α] (v : α → α) :
  (Matrix.vecMulVec v (star v)) * v = (star v v) * v := by
  ext i
  simp only [mulVec, vecMulVec_apply, Pi.smul_apply, smul_eq_mul, dotProduct]
  calc ? j, v i * star (v j) * v j
    = ? j, (star (v j) * v j) * v i :=
      Finset.sum_congr rfl fun j _ => by ring
  _ = (? j, star (v j) * v j) * v i := (Finset.sum_mul _ _ _).symm
```

#### 4.4.1057 Real embedding of the real part, assuming imaginary part of zero

**Statement.** For a complex number  $z$ : if  $z.im = 0$ , then  $\uparrow z.re = z$ . Formally:  $\uparrow z.re = z$ .

**Proof.** Both sides are compared pointwise (by extensionality). The goal is simplified using the extensionality for bilinear maps.

**Lean 4 source QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean**

```
theorem ofReal_re_of_im_zero (z : ℂ) (him : z.im = 0) : (z.re : ℂ) = z := by
  apply Complex.ext
  * simp
  * simp using him.symm
```

#### 4.4.1058 Adjoint of the dot of a scalar multiple

**Statement.** For a natural number  $A$ , a complex number  $c$ , indexes  $v, w$ : the adjoint of  $v, \cdot_v, c \cdot w$  equals the product of  $c$  and the adjoint of  $v, \cdot_v, w$ .

**Proof.** The goal is simplified using the usual algebraic identities and distributivity of multiplication over finite sums.

**Lean 4 source QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean**

```
theorem star_dot_smul {A : Nat} (c : ℂ) (v w : Fin A → ℂ) :
  star v v (c * w) = c * (star v v w) := by
  simp [dotProduct, Pi.smul_apply, smul_eq_mul, Finset.mul_sum, mul_left_comm]
```

#### 4.4.1059 The outer product is at most one when the squared norm is at most one

**Statement.** For a natural number  $A$ , an index  $v$ : if  $\text{Matrix.vecMulVec } v \text{ (star } v) \leq (1 : \text{Matrix (Fin } A) \text{ (Fin } A) \mathbb{C})$ , then  $(\text{star } v \cdot v).re \leq 1$ .

**Proof.** The key step rewrites with the outer product of the multiplication vector of itself, the adjoint of the dot of a scalar multiple, the usual algebraic identities and standard identities for complex numbers. The remaining inequalities follow by linear arithmetic.

#### Lean 4 source QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean

```

theorem vecMulVec_le_one_normSq_le_one {A : Nat}
  (v : Fin A -> ?)
  (hle : Matrix.vecMulVec v (star v) <= (1 : Matrix (Fin A) (Fin A) ?)) :
  (star v ?? v).re <= 1 := by
  have him := (star_dotProduct_self_nonneg_real v).2
  set nrm := star v ?? v
  have hdiff : ((1 : Matrix (Fin A) (Fin A) ?) -
    Matrix.vecMulVec v (star v)).PosSemidef := Matrix.le_iff.mp hle
  have hpos := Matrix.PosSemidef.dotProduct_mulVec_nonneg hdiff v
  have hI : star v ?? (1 : Matrix (Fin A) (Fin A) ?) *? v = nrm := by simp [nrm]
  have hP : star v ?? (Matrix.vecMulVec v (star v)) *? v = nrm * nrm := by
    rw [vecMulVec_mulVec_self, star_dot_smul]
  have hsub : star v ?? ((1 : Matrix (Fin A) (Fin A) ?) -
    Matrix.vecMulVec v (star v)) *? v = nrm - nrm * nrm := by
    rw [sub_mulVec, dotProduct_sub, hI, hP]
  have hnn : 0 <= (nrm - nrm * nrm).re := by
    have := hpos; rw [hsub] at this
    exact (Complex.nonneg_iff.mp this).1
  have : (nrm - nrm * nrm).re = nrm.re - nrm.re * nrm.re := by
    simp [Complex.sub_re, Complex.mul_re, him]
  rw [this] at hnn
  nlinarith

```

#### 4.4.1060 The quadratic effect pairing equals an expectation

**Statement.** For a natural number  $A$ , an index  $v$ : if  $\text{Matrix.vecMulVec } v \text{ (star } v) \leq (1 : \text{Matrix (Fin } A) \text{ (Fin } A) \mathbb{C})$ , then the quadratic effect pairing of the double dual effect pairing of  $F$  and  $v$  equals the effect expectation.

**Proof.** Both sides are compared pointwise (by extensionality). The claim follows from a chain of equalities (or inequalities). The argument splits on the relevant condition. The key step rewrites with the definition of the quadratic effect pairing, the definition of the effect expectation, the definition of the normalize vector and standard identities for complex numbers.

#### Lean 4 source QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean

```

theorem effectPairingQuad_eq_expectation {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (v : Fin A -> ?)
  (hle : Matrix.vecMulVec v (star v) <= (1 : Matrix (Fin A) (Fin A) ?)) :
  effectPairingQuad (doubleDualEffectPairing F) v =
    effectExpectation (doubleDualEffectPairing F)
      (Matrix.vecMulVec v (star v))
      (Matrix.posSemidef_vecMulVec_self_star v) hle := by
  simp only [effectPairingQuad]
  by_cases hv : star v ?? v = 0
  * have hmat : Matrix.vecMulVec v (star v) = 0 := by
    have : v = 0 := (dotProduct_star_self_eq_zero).1 hv
    simp [this]
  have h0 := effectExpectation_zero_doubleDual (A := A) F

```

```

simp only [effectExpectation, hv, hmat] at h0 |-
simp using h0.symm
* set u := normalizeVec v hv
have hre := (star_dotProduct_self_nonneg_real v).1
have him := (star_dotProduct_self_nonneg_real v).2
set s : ? := (Real.sqrt (star v ?? v).re)
have hv_eq : v = s * u := by
  simp only [u, normalizeVec, s]
  ext i
  have hs_ne : s != 0 := by
    intro hs0
    have : (star v ?? v).re = 0 :=
      (Real.sqrt_eq_zero hre).1 (by simp [s] using congrArg Complex.re hs0)
    exact hv (Complex.ext this him)
  change v i = s * (s^-1 * v i)
  field_simp [hs_ne]
have hstar_s : star s = s := by simp [s, Complex.conj_ofReal]
have hnorm_sq : star v ?? v = s * s := by
  apply Complex.ext
  * have : (star v ?? v).re = s.re * s.re := by
    simp [s, Complex.ofReal_re] using (Real.mul_self_sqrt hre).symm
    simp [Complex.mul_re, s] using this
  * simp [Complex.mul_im, s] using him
have hmat : Matrix.vecMulVec v (star v) =
  (star v ?? v) * Matrix.vecMulVec u (star u) := by
  calc Matrix.vecMulVec v (star v)
    = Matrix.vecMulVec (s * u) (star (s * u)) := by rw [hv_eq]
    _ = (s * star s) * Matrix.vecMulVec u (star u) := vecMulVec_smul_star s u
    _ = (s * s) * Matrix.vecMulVec u (star u) := by rw [hstar_s]
    _ = (star v ?? v) * Matrix.vecMulVec u (star u) := by rw [← hnorm_sq]
have ht0 : (0 : ?) <= (star v ?? v).re := hre
have ht1 : (star v ?? v).re <= 1 := vecMulVec_le_one_normSq_le_one v hle
have hu_le : Matrix.vecMulVec u (star u) <= 1 :=
  vecMulVec_unit_le_one u (normalizeVec_norm v hv)
have hnorm_ofReal : (((star v ?? v).re) : ?) = star v ?? v :=
  ofReal_re_of_im_zero _ him
have hsmul_eq :
  ((star v ?? v).re : ?) * Matrix.vecMulVec u (star u) =
  (star v ?? v) * Matrix.vecMulVec u (star u) := by
  ext i j
  simp [Matrix.smul_apply, smul_eq_mul, hnorm_ofReal]
have hmat' : Matrix.vecMulVec v (star v) =
  ((star v ?? v).re : ?) * Matrix.vecMulVec u (star u) := by
  rw [hmat, ← hsmul_eq]
have hb :=
  effectExpectation_smul_doubleDual F (star v ?? v).re ht0 ht1
  (Matrix.vecMulVec u (star u))
  (Matrix.posSemidef_vecMulVec_self_star u) hu_le
rw [dite_eq_right hv]
have hR :
  effectExpectation (doubleDualEffectPairing F)
  (Matrix.vecMulVec v (star v))
  (Matrix.posSemidef_vecMulVec_self_star v) hle =
  (((star v ?? v).re) : ?) *
  effectExpectation (doubleDualEffectPairing F)
  (Matrix.vecMulVec u (star u))

```

```

      (Matrix.posSemidef_vecMulVec_self_star u) hu_le := by
have hL :
  effectExpectation (doubleDualEffectPairing F)
    (Matrix.vecMulVec v (star v))
    (Matrix.posSemidef_vecMulVec_self_star v) hle =
  effectExpectation (doubleDualEffectPairing F)
    (((star v ?? v).re : ?) * Matrix.vecMulVec u (star u))
    ((Matrix.posSemidef_vecMulVec_self_star u).smul ht0)
    (smul_le_one_of_le_one _ (Matrix.posSemidef_vecMulVec_self_star u)
      hu_le _ ht0 ht1) := by
  simp only [effectExpectation, hmat']
rw [hL, hb]
have hborn :
  bornScalar (doubleDualEffectPairing F
    (ofEffect (Matrix.vecMulVec (normalizeVec v hv)
      (star (normalizeVec v hv)))
      (Matrix.posSemidef_vecMulVec_self_star _)
      (vecMulVec_unit_le_one _ (normalizeVec_norm v hv)))) =
  effectExpectation (doubleDualEffectPairing F)
    (Matrix.vecMulVec u (star u))
    (Matrix.posSemidef_vecMulVec_self_star u) hu_le := by
  simp only [effectExpectation, u]
rw [hborn, <- hnm_ofReal, hR]

```

#### 4.4.1061 Nonnegativity of the quadratic effect pairing

**Statement.** For a natural number  $A$ , a superoperator  $\alpha$ , an index  $v$ :  $0 \leq (\text{effectPairingQuad } \alpha \ v) . \text{re}$  and  $(\text{effectPairingQuad } \alpha \ v) . \text{im} = 0$ .

**Proof.** Each component of the claim is established separately. The argument splits on the relevant condition. The goal is simplified using the definition of the quadratic effect pairing, standard identities for complex numbers and the usual algebraic identities.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean](#)

```

theorem effectPairingQuad_nonneg {A : Nat}
  (a : Superoperator A 1 -> Superoperator 1 1) (v : Fin A -> ?) :
  0 <= (effectPairingQuad a v).re /\ (effectPairingQuad a v).im = 0 := by
  simp only [effectPairingQuad]
  split_ifs with h
  * simp
  * have hb :=
    bornScalar_nonneg
      (a (ofEffect
        (Matrix.vecMulVec (normalizeVec v h) (star (normalizeVec v h)))
        (Matrix.posSemidef_vecMulVec_self_star _)
        (vecMulVec_unit_le_one _ (normalizeVec_norm v h))))
  have hnm := star_dotProduct_self_nonneg_real v
  constructor
  * simp only [Complex.mul_re, hnm.2, hb.2.1, mul_zero, sub_zero]
    nlinarith [hnm.1, hb.1]
  * simp [Complex.mul_im, hnm.2, hb.2.1]

```

#### 4.4.1062 On every Loewner effect, the double-dual Born pairing matches the density recovered by polarization: $\beta(\mathbf{E}) = \text{Tr}(\mathbf{E} \rho)$

**Statement.** On every Loewner effect, the double-dual Born pairing matches the density recovered by polarization:  $\beta(\mathbf{E}) = \text{Tr}(\mathbf{E} \rho)$ .

**Proof.** Both sides are compared pointwise (by extensionality). The claim follows from a chain of equalities (or inequalities). The argument proceeds by induction. The key step rewrites with the definition of the  $\mathbf{p}$ , the definition of the unrestricted, the definition of the effect expectation extensionality and standard identities for finite sums.

#### Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/BornMatch.lean`

```
theorem born_match_density {A : Nat} (_hA : 0 < A)
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (E : Matrix (Fin A) (Fin A) ?) (hpsd : E.PosSemidef) (hle : E <= 1) :
  effectExpectation (doubleDualEffectPairing F) E hpsd hle =
    Matrix.trace (E * densityFromEffectPairing (doubleDualEffectPairing F)) := by
  classical
  set ? := densityFromEffectPairing (doubleDualEffectPairing F)
  have hHerm := hpsd.isHermitian
  set U : Matrix (Fin A) (Fin A) ? := hHerm.eigenvectorUnitary
  set u : Fin A -> (Fin A -> ?) := fun i a => U a i
  set P : Fin A -> Matrix (Fin A) (Fin A) ? := fun i =>
    Matrix.vecMulVec (fun a => U a i) (fun b => star (U b i))
  have hPu (i : Fin A) : P i = Matrix.vecMulVec (u i) (star (u i)) := by
    simp only [P, u]; congr 1
  have hPpsd : forall i, (P i).PosSemidef := fun i => by
    rw [hPu]; exact Matrix.posSemidef_vecMulVec_self_star (u i)
  have hLam0 : forall i, 0 <= hHerm.eigenvalues i :=
    fun i => PosSemidef.eigenvalues_nonneg hpsd i
  have hexp : E = ? i : Fin A, (hHerm.eigenvalues i : ?) * P i := by
    simpa [P, U] using isHermitian_eq_sum_eigenprojectors E hHerm
  have hexpR : E = ? i : Fin A, (hHerm.eigenvalues i : ?) * P i := by
    convert hexp using 1
  have hExtb : effectExpectationExt F E hpsd =
    effectExpectation (doubleDualEffectPairing F) E hpsd hle :=
    effectExpectationExt_of_le_one F E hpsd hle
  have hExtP (i : Fin A) :
    effectExpectationExt F (P i) (hPpsd i) =
    Matrix.trace (P i * ?) := by
    have hq := effectPairingQuad_eq_ext F (u i)
    have hd := density_quad_eq F (u i)
    have htr := trace_vecMulVec_mul ? (u i)
    have hL : effectExpectationExt F (P i) (hPpsd i) =
      effectExpectationExt F (Matrix.vecMulVec (u i) (star (u i)))
      (Matrix.posSemidef_vecMulVec_self_star (u i)) := by
      simp only [effectExpectationExt, hPu]
    have hR : Matrix.trace (P i * ?) =
      Matrix.trace (Matrix.vecMulVec (u i) (star (u i)) * ?) := by
      rw [hPu]
    rw [hL, hR]
  calc effectExpectationExt F (Matrix.vecMulVec (u i) (star (u i))) _
    = effectPairingQuad (doubleDualEffectPairing F) (u i) := hq.symm
    _ = star (u i) ?? ? * ? u i := hd.symm
    _ = Matrix.trace (Matrix.vecMulVec (u i) (star (u i)) * ?) := htr.symm
```

```

have hExtLamP (i : Fin A) :
  effectExpectationExt F ((hHerm.eigenvalues i : ?) * P i)
    ((hPpsd i).smul (hLam0 i)) =
    (hHerm.eigenvalues i : ?) * effectExpectationExt F (P i) (hPpsd i) :=
  effectExpectationExt_smul F (hHerm.eigenvalues i) (hLam0 i) (P i) (hPpsd i)
have hExtSum : effectExpectationExt F E hpsd =
  ? i : Fin A, effectExpectationExt F ((hHerm.eigenvalues i : ?) * P i)
    ((hPpsd i).smul (hLam0 i)) := by
  have hadd : forall (s : Finset (Fin A)),
    effectExpectationExt F
      (? i in s, (hHerm.eigenvalues i : ?) * P i)
      (sum_psd_matrix s (fun i => (hHerm.eigenvalues i : ?) * P i)
        (fun i _ => (hPpsd i).smul (hLam0 i))) =
      ? i in s, effectExpectationExt F ((hHerm.eigenvalues i : ?) * P i)
        ((hPpsd i).smul (hLam0 i)) := by
  intro s
  induction s using Finset.induction_on with
  | empty =>
    simp only [Finset.sum_empty]
    have h0 : effectExpectationExt F (0 : Matrix (Fin A) (Fin A) ?)
      PosSemidef.zero = 0 := by
      simp only [effectExpectationExt, Matrix.trace_zero, Complex.zero_re,
        max_eq_right zero_le_one]
    have hz : ((1^-1 : ?) * (0 : Matrix (Fin A) (Fin A) ?)) = 0 := by
      ext; simp
    simp [effectExpectation, hz] using
      effectExpectation_zero_doubleDual (A := A) F
    convert h0
  | insert i s hs ih =>
    simp only [Finset.sum_insert hs]
    have hE := (hPpsd i).smul (hLam0 i)
    have hS := sum_psd_matrix s (fun j => (hHerm.eigenvalues j : ?) * P j)
      (fun j _ => (hPpsd j).smul (hLam0 j))
    rw [effectExpectationExt_add F _ _ hE hS, ih]
  have h := hadd Finset.univ
  have hL : effectExpectationExt F
    (? i : Fin A, (hHerm.eigenvalues i : ?) * P i)
    (sum_psd_matrix Finset.univ (fun i => (hHerm.eigenvalues i : ?) * P i)
      (fun i _ => (hPpsd i).smul (hLam0 i))) =
    effectExpectationExt F E hpsd := by
    simp only [effectExpectationExt, <- hexpR]
  exact hL |> h
calc effectExpectation (doubleDualEffectPairing F) E hpsd hle
  = effectExpectationExt F E hpsd := hExtb.symm
_ = ? i, effectExpectationExt F ((hHerm.eigenvalues i : ?) * P i)
  ((hPpsd i).smul (hLam0 i)) := hExtSum
_ = ? i, (hHerm.eigenvalues i : ?) *
  effectExpectationExt F (P i) (hPpsd i) := by
  refine Finset.sum_congr rfl fun i _ => hExtLamP i
_ = ? i, (hHerm.eigenvalues i : ?) * Matrix.trace (P i * ?) := by
  refine Finset.sum_congr rfl fun i _ => by rw [hExtP]
_ = ? i, Matrix.trace (((hHerm.eigenvalues i : ?) * P i) * ?) := by
  refine Finset.sum_congr rfl fun i _ => ?_
  have hsm : ((hHerm.eigenvalues i : ?) * P i) * ? =
    (hHerm.eigenvalues i : ?) * (P i * ?) := Matrix.smul_mul _ _ _
  rw [hsm, Matrix.trace_smul, smul_eq_mul]

```

```

_ = Matrix.trace ((? i, (hHerm.eigenvalues i : ?) * P i) * ?) := by
  simp [Finset.sum_mul, Matrix.trace_sum]
_ = Matrix.trace (E * ?) := by rw [ <- hexp]

```

#### 4.4.1063 Existence of the preparation, assuming double dual

**Statement.** From Born match: a double-dual fiber at  $n = 1$  yields a preparation  $\Phi$  with  $e \circ \Phi = \text{doubleDualEffectPairing } F \ e$  for every effect  $e$ . Formally:  $\exists \Phi : \text{Superoperator } 1 \ A, \forall e : \text{Superoperator } A \ 1, \text{effectPrecompose } \Phi \ e = \text{doubleDualEffectPairing } F \ e$ .

**Proof.** The goal is simplified using the definition of the effect expectation and the existence half of the analytic gate at fiber  $n = 1$ .

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/BornMatch.lean](#)

```

theorem exists_preparation_of_doubleDual {A : Nat} (hA : 0 < A)
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier) :
  exists ? : Superoperator 1 A,
    forall e : Superoperator A 1,
      effectPrecompose ? e = doubleDualEffectPairing F e := by
  set ? := densityFromEffectPairing (doubleDualEffectPairing F)
  refine exists_superoperator_of_effect_pairing
    (doubleDualEffectPairing F) ?
    (densityFromDoubleDual_posSemidef F)
    (trace_density_le_one F) ?_
  intro E hpsd hle
  simp [effectExpectation] using born_match_density hA F E hpsd hle

```

#### 4.4.1064 Parallelogram / polarization recovery of the density

**Statement.** ### Parallelogram / polarization recovery of the density. Formally:  $(c \cdot E) \leq (c \cdot (1 : \text{Matrix } (\text{Fin } A) \ (\text{Fin } A) \ \mathbb{C})))$ .

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the characterization of the order for subnormalized density matrices and standard identities for matrices.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/BornPolarForm.lean](#)

```

theorem smul_le_smul_one_of_le_one {A : Nat} (E : Matrix (Fin A) (Fin A) ?)
  (_hE : E.PosSemidef) (hE1 : E <= 1) (c : ?) (hc0 : 0 <= c) :
  (c * E) <= (c * (1 : Matrix (Fin A) (Fin A) ?)) := by
  rw [Matrix.le_iff]
  have : c * (1 : Matrix (Fin A) (Fin A) ?) - c * E = c * (1 - E) := by
    ext; simp [Matrix.sub_apply, Matrix.smul_apply]; ring
  rw [this]
  exact (Matrix.le_iff.mp hE1).smul hc0

```

#### 4.4.1065 Rank-one Loewner bound $|\mathbf{v}\rangle\langle\mathbf{v}| \leq \|\mathbf{v}\|^2 \cdot \mathbf{I}$

**Statement.** Rank-one Loewner bound  $|\mathbf{v}\rangle\langle\mathbf{v}| \leq \|\mathbf{v}\|^2 \cdot \mathbf{I}$ . Formally:  $\text{Matrix.vecMulVec } v \text{ (star } v) \leq ((\text{star } v \cdot v).\text{re} : \mathbb{R}) \cdot (1 : \text{Matrix } (\text{Fin } A) (\text{Fin } A) \mathbb{C}))$ .

**Proof.** Both sides are compared pointwise (by extensionality). The claim follows from a chain of equalities (or inequalities). The argument splits on the relevant condition. The key step rewrites with the definition of the normalize vector and standard identities for complex numbers.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/BornPolarForm.lean](#)

```
theorem vecMulVec_le_normSq_smul_one {A : Nat} (v : Fin A -> ?) :
  Matrix.vecMulVec v (star v) <=
    (((star v ?? v).re : ?) * (1 : Matrix (Fin A) (Fin A) ?)) := by
  classical
  by_cases hv : star v ?? v = 0
  * have hv0 : v = 0 := (dotProduct_star_self_eq_zero).1 hv
    have hre0 : (star v ?? v).re = 0 := by simp [hv]
    rw [show Matrix.vecMulVec v (star v) = 0 by simp [hv0],
        show (((star v ?? v).re : ?) * (1 : Matrix (Fin A) (Fin A) ?)) = 0 by
          simp [hre0]]
  * set u := normalizeVec v hv
    have hre := (star_dotProduct_self_nonneg_real v).1
    have him := (star_dotProduct_self_nonneg_real v).2
    set s : ? := (Real.sqrt (star v ?? v).re)
    have hv_eq : v = s * u := by
      simp only [u, normalizeVec, s]
    ext i
    have hs_ne : s != 0 := by
      intro hs0
      exact hv (Complex.ext
        ((Real.sqrt_eq_zero hre).1 (by simp [s] using congrArg Complex.re hs0))
        him)
    change v i = s * (s^-1 * v i)
    field_simp [hs_ne]
    have hstar_s : star s = s := by simp [s, Complex.conj_ofReal]
    have hnorm_sq : star v ?? v = s * s := by
      apply Complex.ext
      * simp [Complex.mul_re, s, Complex.ofReal_re] using
        (Real.mul_self_sqrt hre).symm
      * simp [Complex.mul_im, s] using him
    have hmat : Matrix.vecMulVec v (star v) =
      (star v ?? v) * Matrix.vecMulVec u (star u) := by
      calc Matrix.vecMulVec v (star v)
        = Matrix.vecMulVec (s * u) (star (s * u)) := by rw [hv_eq]
        _ = (s * star s) * Matrix.vecMulVec u (star u) := vecMulVec_smul_star s u
        _ = (s * s) * Matrix.vecMulVec u (star u) := by rw [hstar_s]
        _ = (star v ?? v) * Matrix.vecMulVec u (star u) := by rw [hnorm_sq]
    have hsmul_eq :
      ((star v ?? v).re : ?) * Matrix.vecMulVec u (star u) =
      (star v ?? v) * Matrix.vecMulVec u (star u) := by
      ext i j
      simp [Matrix.smul_apply, smul_eq_mul, ofReal_re_of_im_zero _ him]
    rw [hmat, <- hsmul_eq]
    exact smul_le_smul_one_of_le_one _
```



```
(Matrix.posSemidef_vecMulVec_self_star u)
(vecMulVec_unit_le_one u (normalizeVec_norm v hv)) _ hre
```

#### 4.4.1066 The outer product is at most one, assuming squared norm of the order

**Statement.** For a natural number  $A$ , an index  $v$ : if  $(\text{star } v \cdot v).re \leq 1$ , then  $\text{Matrix.vecMulVec } v (\text{star } v) \leq (1 : \text{Matrix } (\text{Fin } A) (\text{Fin } A) \mathbb{C})$ .

**Proof.** The proof term combines the facts named in it directly.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/BornPolarForm.lean](#)

```
theorem vecMulVec_le_one_of_normSq_le {A : Nat} (v : Fin A -> ?)
  (hle : (star v ?? v).re <= 1) :
  Matrix.vecMulVec v (star v) <= (1 : Matrix (Fin A) (Fin A) ?) :=
  (vecMulVec_le_normSq_smul_one v).trans <|
  smul_le_one_of_le_one (1 : Matrix (Fin A) (Fin A) ?)
  PosSemidef.one le_rfl _ (star_dotProduct_self_nonneg_real v).1 hle
```

#### 4.4.1067 The adjoint dot addition self

**Statement.** For a natural number  $A$ , indexes  $x, y$ : the sum of the adjoint of  $x + y$ ,  $\cdot_v, x + y$  and the adjoint of  $x - y$ ,  $\cdot_v, x - y$  equals the product of 2 and the sum of the adjoint of  $x$ ,  $\cdot_v, x$  and the adjoint of  $y$ ,  $\cdot_v, y$ .

**Proof.** The claim follows from a chain of equalities (or inequalities). The key step rewrites with the usual algebraic identities, distributivity of multiplication over finite sums and standard identities for finite sums.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/BornPolarForm.lean](#)

```
theorem star_dot_add_self {A : Nat} (x y : Fin A -> ?) :
  star (x + y) ?? (x + y) + star (x - y) ?? (x - y) =
  (2 : ?) * (star x ?? x + star y ?? y) := by
  simp only [dotProduct, Pi.add_apply, Pi.sub_apply, Pi.star_apply]
  have hterm : forall i,
    star (x i + y i) * (x i + y i) + star (x i - y i) * (x i - y i) =
    2 * (star (x i) * x i + star (y i) * y i) := by
  intro i; simp [star_add, star_sub]; ring
  calc ? i, star (x i + y i) * (x i + y i) +
    ? i, star (x i - y i) * (x i - y i)
  = ? i, (star (x i + y i) * (x i + y i) +
    star (x i - y i) * (x i - y i)) :=
    (Finset.sum_add_distrib).symm
  _ = ? i, (2 * (star (x i) * x i + star (y i) * y i)) :=
    Finset.sum_congr rfl fun i _ => hterm i
  _ = 2 * ? i, (star (x i) * x i + star (y i) * y i) := by
    rw [← Finset.mul_sum]
  _ = 2 * (? i, star (x i) * x i + ? i, star (y i) * y i) := by
    simp [Finset.sum_add_distrib]
```

#### 4.4.1068 Order bound for the adjoint of the dot of a sum of the real part

**Statement.** For a natural number  $A$ , indexes  $x, y$ :  $(\text{star } (x + y) \cdot (x + y)).\text{re} \leq 2 * ((\text{star } x \cdot x).\text{re} + (\text{star } y \cdot y).\text{re})$ .

**Proof.** The goal is simplified using standard identities for complex numbers, the usual algebraic identities and the fact that zero is a right unit for addition for finitely supported sums. The remaining inequalities follow by linear arithmetic.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/BornPolarForm.lean](#)

```
theorem star_dot_add_re_le {A : Nat} (x y : Fin A -> ?) :
  (star (x + y) ?? (x + y)).re <=
    2 * ((star x ?? x).re + (star y ?? y).re) := by
  have hx := star_dotProduct_self_nonneg_real x
  have hy := star_dotProduct_self_nonneg_real y
  have hxy := (star_dotProduct_self_nonneg_real (x - y)).1
  have h := congrArg Complex.re (star_dot_add_self x y)
  simp only [Complex.add_re, Complex.mul_re, Complex.add_im, hx.2, hy.2,
    mul_zero, sub_zero, add_zero] at h
  have hsum :
    (star (x + y) ?? (x + y)).re + (star (x - y) ?? (x - y)).re =
      2 * ((star x ?? x).re + (star y ?? y).re) := by
    simpa [two_mul] using h
  linarith
```

#### 4.4.1069 Real embedding of a scalar multiple of the squared norm

**Statement.** For a natural number  $A$ , a real number  $t$ , an index  $v$ :  $(\text{star } (t \cdot v) \cdot (t \cdot v)).\text{re}$  equals the product of the  $T$  gate on wire 2 and  $(\text{star } v \cdot v).\text{re}$ .

**Proof.** The key step rewrites with the adjoint of the dot product of a scalar multiple of itself, the usual algebraic identities and standard identities for complex numbers.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/BornPolarForm.lean](#)

```
theorem ofReal_smul_normSq {A : Nat} (t : ?) (v : Fin A -> ?) :
  (star ((t : ?) * v) ?? ((t : ?) * v)).re =
    t ^ 2 * (star v ?? v).re := by
  have him := (star_dotProduct_self_nonneg_real v).2
  have hstar : star (t : ?) = (t : ?) := Complex.conj_ofReal t
  rw [star_dotProduct_smul_self, hstar]
  have hmul : ((t : ?) * (t : ?)).re = t ^ 2 := by simp [pow_two]
  have himt : ((t : ?) * (t : ?)).im = 0 := by simp
  simp [Complex.mul_re, him, himt, hmul]
```

#### 4.4.1070 The two of a scalar multiple of the outer product of a sum is at most one

**Statement.** For a natural number  $A$ , indexes  $x, y$ : if  $2 * ((\text{star } x \cdot x).\text{re} + (\text{star } y \cdot y).\text{re}) \leq 1$ , then the sum of the outer product of  $x$  and  $\text{star } x$  scaled by 2 and the outer product of  $y$  and  $\text{star } y$  scaled by 2 is at most 1 :  $\text{Matrix } (\text{Fin } A) (\text{Fin } A) \mathbb{C}$ .

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the characterization of the order for subnormalized density matrices and standard identities for matrices.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/BornPolarForm.lean](#)

```
theorem two_smul_vecMulVec_add_le_one {A : Nat} (x y : Fin A → ?)
  (h : 2 * ((star x ?? x).re + (star y ?? y).re) <= 1) :
  (2 : ?) * Matrix.vecMulVec x (star x) +
  (2 : ?) * Matrix.vecMulVec y (star y) <=
  (1 : Matrix (Fin A) (Fin A) ?) := by
have hx := vecMulVec_le_normSq_smul_one x
have hy := vecMulVec_le_normSq_smul_one y
have hx2 : (2 : ?) * Matrix.vecMulVec x (star x) <=
  (2 * (star x ?? x).re : ?) * (1 : Matrix (Fin A) (Fin A) ?) := by
  rw [Matrix.le_iff]
have : (2 * (star x ?? x).re : ?) * (1 : Matrix (Fin A) (Fin A) ?) -
  (2 : ?) * Matrix.vecMulVec x (star x) =
  (2 : ?) * (((star x ?? x).re : ?) * 1 -
    Matrix.vecMulVec x (star x)) := by
  ext; simp [Matrix.sub_apply, Matrix.smul_apply]; ring
  rw [this]
  exact (Matrix.le_iff.mp hx).smul (by norm_num)
have hy2 : (2 : ?) * Matrix.vecMulVec y (star y) <=
  (2 * (star y ?? y).re : ?) * (1 : Matrix (Fin A) (Fin A) ?) := by
  rw [Matrix.le_iff]
have : (2 * (star y ?? y).re : ?) * (1 : Matrix (Fin A) (Fin A) ?) -
  (2 : ?) * Matrix.vecMulVec y (star y) =
  (2 : ?) * (((star y ?? y).re : ?) * 1 -
    Matrix.vecMulVec y (star y)) := by
  ext; simp [Matrix.sub_apply, Matrix.smul_apply]; ring
  rw [this]
  exact (Matrix.le_iff.mp hy).smul (by norm_num)
refine (add_le_add hx2 hy2).trans ?_
have hsum :
  (2 * (star x ?? x).re : ?) * (1 : Matrix (Fin A) (Fin A) ?) +
  (2 * (star y ?? y).re : ?) * 1 =
  (2 * ((star x ?? x).re + (star y ?? y).re) : ?) * 1 := by
  ext; simp [Matrix.add_apply, Matrix.smul_apply]; ring
  rw [hsum]
exact smul_le_one_of_le_one (1 : Matrix (Fin A) (Fin A) ?)
  PosSemidef.one le_rfl _
  (mul_nonneg (by norm_num : (0 : ?) <= 2)
    (add_nonneg (star_dotProduct_self_nonneg_real x).1
      (star_dotProduct_self_nonneg_real y).1)) h
```

#### 4.4.1071 Scaling factor making $2(|\mathbf{t}\mathbf{x}\rangle\langle\mathbf{t}\mathbf{x}| + |\mathbf{t}\mathbf{y}\rangle\langle\mathbf{t}\mathbf{y}|) \leq \mathbf{I}$

**Definition.** Scaling factor making  $2(|\mathbf{t}\mathbf{x}\rangle\langle\mathbf{t}\mathbf{x}| + |\mathbf{t}\mathbf{y}\rangle\langle\mathbf{t}\mathbf{y}|) \leq \mathbf{I}$ .

**Construction.** Defined to be the sum of the let of  $N$ ,  $:=, (\text{star } x \cdot x) \cdot \text{re}$  and  $(\text{star } y \cdot y) \cdot \text{re}$   $\text{Real.sqrt } (1 / (2 * (N + 1)))$ .

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/BornPolarForm.lean](#)

```

noncomputable def parallelScaleR {A : Nat} (x y : Fin A → ℝ) : ℝ :=
  let N := (star x ?? x).re + (star y ?? y).re
  Real.sqrt (1 / (2 * (N + 1)))

```

#### 4.4.1072 Positivity of the parallel scale r

**Statement.** For a natural number A, indexes x, y:  $0 < \text{parallelScaleR } x \ y$ .

**Proof.** It follows from standard identities for real numbers. The remaining numerical facts are checked by direct computation.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/BornPolarForm.lean](#)

```

theorem parallelScaleR_pos {A : Nat} (x y : Fin A → ℝ) :
  0 < parallelScaleR x y := by
  set N := (star x ?? x).re + (star y ?? y).re
  have hN0 : 0 <= N :=
    add_nonneg (star_dotProduct_self_nonneg_real x).1
    (star_dotProduct_self_nonneg_real y).1
  have hden : 0 < 2 * (N + 1) := by
    nlinarith
  exact Real.sqrt_pos.2 (div_pos (by norm_num) hden)

```

#### 4.4.1073 Bound on the parallel scale r

**Statement.** For a natural number A, indexes x, y:  $2 * (\text{parallelScaleR } x \ y) ^ 2 * ((\text{star } x \cdot x).re + (\text{star } y \cdot y).re) \leq 1$ .

**Proof.** The key step rewrites with the definition of the parallel scale r, the definition of the n, standard identities for real numbers and the usual algebraic identities. The remaining inequalities follow by linear arithmetic.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/BornPolarForm.lean](#)

```

theorem parallelScaleR_bound {A : Nat} (x y : Fin A → ℝ) :
  2 * (parallelScaleR x y) ^ 2 *
    ((star x ?? x).re + (star y ?? y).re) <= 1 := by
  set N := (star x ?? x).re + (star y ?? y).re
  have hN0 : 0 <= N :=
    add_nonneg (star_dotProduct_self_nonneg_real x).1
    (star_dotProduct_self_nonneg_real y).1
  have hden : 0 < 2 * (N + 1) := by nlinarith
  have hsq : (parallelScaleR x y) ^ 2 = 1 / (2 * (N + 1)) := by
    simp only [parallelScaleR, N]
    exact Real.sq_sqrt (div_nonneg (by norm_num) (le_of_lt hden))
  rw [hsq]
  have : 2 * (1 / (2 * (N + 1))) * N = N / (N + 1) := by
    field_simp [hden.ne']
  rw [this]
  exact div_le_one_of_le_0 (by linarith) (add_nonneg hN0 zero_le_one)

```

#### 4.4.1074 Parallelogram identity for the double-dual Born quadratic form

**Statement.** Parallelogram identity for the double-dual Born quadratic form.

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with standard identities for complex numbers, the usual algebraic identities and the fact that zero is a right unit for addition for finitely supported sums.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornPolarForm.lean`

```
theorem effectPairingQuad_parallelogram {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (x y : Fin A -> ?) :
  effectPairingQuad (doubleDualEffectPairing F) (x + y) +
    effectPairingQuad (doubleDualEffectPairing F) (x - y) =
    2 * effectPairingQuad (doubleDualEffectPairing F) x +
    2 * effectPairingQuad (doubleDualEffectPairing F) y := by
  set a := doubleDualEffectPairing F
  set t := parallelScaleR x y
  have ht0 : 0 < t := parallelScaleR_pos x y
  set x' : Fin A -> ? := (t : ?) * x
  set y' : Fin A -> ? := (t : ?) * y
  have hxN : (star x' ?? x').re = t ^ 2 * (star x ?? x).re := by
    simp [x'] using ofReal_smul_normSq t x
  have hyN : (star y' ?? y').re = t ^ 2 * (star y ?? y).re := by
    simp [y'] using ofReal_smul_normSq t y
  have hsumN : 2 * ((star x' ?? x').re + (star y' ?? y').re) <= 1 := by
    simp only [hxN, hyN]
    convert parallelScaleR_bound x y using 1
    ring
  have hx1 : Matrix.vecMulVec x' (star x') <= 1 :=
    vecMulVec_le_one_of_normSq_le _
    (by linarith [(star_dotProduct_self_nonneg_real y').1])
  have hy1 : Matrix.vecMulVec y' (star y') <= 1 :=
    vecMulVec_le_one_of_normSq_le _
    (by linarith [(star_dotProduct_self_nonneg_real x').1])
  have hxp_re : (star (x' + y') ?? (x' + y')).re <= 1 := by
    linarith [star_dot_add_re_le x' y']
  have hxm_re : (star (x' - y') ?? (x' - y')).re <= 1 := by
    have hx := star_dotProduct_self_nonneg_real x'
    have hy := star_dotProduct_self_nonneg_real y'
    have h := congrArg Complex.re (star_dot_add_self x' y')
    simp only [Complex.add_re, Complex.mul_re, Complex.add_im, hx.2, hy.2,
      mul_zero, sub_zero, add_zero] at h
  have hsum :
    (star (x' + y') ?? (x' + y')).re + (star (x' - y') ?? (x' - y')).re =
    2 * ((star x' ?? x').re + (star y' ?? y').re) := by
    simp [two_mul] using h
    linarith [(star_dotProduct_self_nonneg_real (x' + y')).1]
  have hxp1 : Matrix.vecMulVec (x' + y') (star (x' + y')) <= 1 :=
    vecMulVec_le_one_of_normSq_le _ hxp_re
  have hxm1 : Matrix.vecMulVec (x' - y') (star (x' - y')) <= 1 :=
    vecMulVec_le_one_of_normSq_le _ hxm_re
  have hq_xp := effectPairingQuad_eq_expectation F (x' + y') hxp1
  have hq_xm := effectPairingQuad_eq_expectation F (x' - y') hxm1
  have hq_x := effectPairingQuad_eq_expectation F x' hx1
```

```

have hq_y := effectPairingQuad_eq_expectation F y' hyl
set Pxp := Matrix.vecMulVec (x' + y') (star (x' + y'))
set Pxm := Matrix.vecMulVec (x' - y') (star (x' - y'))
set Px := Matrix.vecMulVec x' (star x')
set Py := Matrix.vecMulVec y' (star y')
have hPxpl : Pxp <= 1 := hxp1
have hPxml : Pxm <= 1 := hxml
have hPx1 : Px <= 1 := hx1
have hPy1 : Py <= 1 := hy1
have hmatR : Pxp + Pxm = (2 : ?) * Px + (2 : ?) * Py := by
  have hmat := vecMulVec_parallelogram x' y'
  simp only [Pxp, Pxm, Px, Py]
  rw [hmat]
  ext i j
  simp [Matrix.add_apply, two_smul]
have h2le : (2 : ?) * Px + (2 : ?) * Py <= 1 := by
  simpa [Px, Py] using two_smul_vecMulVec_add_le_one x' y' hsumN
have hsum_le : Pxp + Pxm <= 1 := by rwa [hmatR]
have hsum_psd : (Pxp + Pxm).PosSemidef :=
  (Matrix.posSemidef_vecMulVec_self_star (x' + y')).add
  (Matrix.posSemidef_vecMulVec_self_star (x' - y'))
have hadd_xp_xm :=
  effectExpectation_add_doubleDual F Pxp Pxm
  (Matrix.posSemidef_vecMulVec_self_star (x' + y'))
  (Matrix.posSemidef_vecMulVec_self_star (x' - y'))
  hPxpl hPxml hsum_le
have hA_eq : (2 : ?) * Px + (2 : ?) * Py = (2 : ?) * (Px + Py) := by
  ext i j
  simp [Matrix.add_apply, Matrix.smul_apply, two_smul]
have h2A' : (2 : ?) * (Px + Py) <= 1 := by rwa [hA_eq]
have hA_le : Px + Py <= 1 := by
  have hhalf : Px + Py =
    ((2 : ?)^-1) * ((2 : ?) * (Px + Py)) := by
    ext i j
    simp [Matrix.add_apply, Matrix.smul_apply, two_smul]
    ring
  rw [hhalf]
  refine (smul_le_smul_one_of_le_one _
    (((Matrix.posSemidef_vecMulVec_self_star x').add
      (Matrix.posSemidef_vecMulVec_self_star y')).smul
      (by norm_num : (0 : ?) <= 2))
    h2A' _ (by norm_num)).trans ?_
  exact smul_le_one_of_le_one (1 : Matrix (Fin A) (Fin A) ?)
    PosSemidef.one le_rfl _ (by norm_num) (by norm_num)
have hadd_xy :=
  effectExpectation_add_doubleDual F Px Py
  (Matrix.posSemidef_vecMulVec_self_star x')
  (Matrix.posSemidef_vecMulVec_self_star y')
  hPx1 hPy1 hA_le
have hb2 :=
  effectExpectation_nsmul_doubleDual F 2 (Px + Py)
  ((Matrix.posSemidef_vecMulVec_self_star x').add
    (Matrix.posSemidef_vecMulVec_self_star y'))
  hA_le h2A'
have hb_sum :
  effectExpectation a Pxp

```

```

    (Matrix.posSemidef_vecMulVec_self_star (x' + y')) hPxpl +
    effectExpectation a Pxm
    (Matrix.posSemidef_vecMulVec_self_star (x' - y')) hPxml =
(2 : ?) *
    (effectExpectation a Px
      (Matrix.posSemidef_vecMulVec_self_star x') hPx1 +
      effectExpectation a Py
      (Matrix.posSemidef_vecMulVec_self_star y') hPy1) := by
have h1 :
    effectExpectation a Pxp
      (Matrix.posSemidef_vecMulVec_self_star (x' + y')) hPxpl +
      effectExpectation a Pxm
      (Matrix.posSemidef_vecMulVec_self_star (x' - y')) hPxml =
    effectExpectation a (Pxp + Pxm) hsum_psd hsum_le :=
    hadd_xp_xm.symm
have h2 :
    effectExpectation a (Pxp + Pxm) hsum_psd hsum_le =
    effectExpectation a ((2 : ?) * (Px + Py))
      ((Matrix.posSemidef_vecMulVec_self_star x').add
      (Matrix.posSemidef_vecMulVec_self_star y')).smul
      (by norm_num)) h2A' := by
    simp only [effectExpectation, a, hmatR, hA_eq]
have h3 :
    effectExpectation a ((2 : ?) * (Px + Py))
      ((Matrix.posSemidef_vecMulVec_self_star x').add
      (Matrix.posSemidef_vecMulVec_self_star y')).smul
      (by norm_num)) h2A' =
    (2 : ?) * effectExpectation a (Px + Py)
      ((Matrix.posSemidef_vecMulVec_self_star x').add
      (Matrix.posSemidef_vecMulVec_self_star y')) hA_le := by
    simp [a, Nat.cast_ofNat] using hb2
have h4 :
    effectExpectation a (Px + Py)
      ((Matrix.posSemidef_vecMulVec_self_star x').add
      (Matrix.posSemidef_vecMulVec_self_star y')) hA_le =
    effectExpectation a Px
      (Matrix.posSemidef_vecMulVec_self_star x') hPx1 +
    effectExpectation a Py
      (Matrix.posSemidef_vecMulVec_self_star y') hPy1 :=
    hadd_xy
    rw [h1, h2, h3, h4]
have hq' :
    effectPairingQuad a (x' + y') + effectPairingQuad a (x' - y') =
    2 * effectPairingQuad a x' + 2 * effectPairingQuad a y' := by
    rw [hq_xp, hq_xm, hq_x, hq_y]
    simp [a, Pxp, Pxm, Px, Py, two_mul, mul_add] using hb_sum
have htstar : star (t : ?) * (t : ?) = (t ^ 2) := by
    simp [Complex.conj_ofReal, pow_two]
have hxpy : x' + y' = (t : ?) * (x + y) := by
    ext i; simp [x', y', mul_add]
have hxmy : x' - y' = (t : ?) * (x - y) := by
    ext i; simp [x', y', mul_sub]
rw [hxpy, hxmy] at hq'
rw [effectPairingQuad_smul a (t : ?) (x + y),
    effectPairingQuad_smul a (t : ?) (x - y),
    effectPairingQuad_smul a (t : ?) x,

```

```

    effectPairingQuad_smul a (t : ?) y, htstar] at hq'
-- hq' : (t?)*q(x+y) + (t?)*q(x-y) = 2*((t?)*qx) + 2*((t?)*qy)
have hcoef : ((t ^ 2) : ?) != 0 :=
  mod_cast (pow_ne_zero 2 ht0.ne')
have hq'' :
  ((t ^ 2) : ?) *
    (effectPairingQuad a (x + y) + effectPairingQuad a (x - y)) =
  ((t ^ 2) : ?) *
    (2 * effectPairingQuad a x + 2 * effectPairingQuad a y) := by
  convert hq' using 1 <=> ring
exact mul_left_cancel_0 hcoef hq''

```

#### 4.4.1075 Parallelogram with $\mathbf{I} \cdot \mathbf{y}$ (uses $|\mathbf{I}|^2 = 1$ )

**Statement.** Parallelogram with  $\mathbf{I} \cdot \mathbf{y}$  (uses  $|\mathbf{I}|^2 = 1$ ).

**Proof.** The key step rewrites with the quadratic effect pairing of a scalar multiple, standard identities for complex numbers and the usual algebraic identities.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/BornPolarForm.lean](#)

```

theorem effectPairingQuad_parallelogram_I {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (x y : Fin A -> ?) :
  effectPairingQuad (doubleDualEffectPairing F) (x + Complex.I * y) +
  effectPairingQuad (doubleDualEffectPairing F) (x - Complex.I * y) =
  2 * effectPairingQuad (doubleDualEffectPairing F) x +
  2 * effectPairingQuad (doubleDualEffectPairing F) y := by
  have h := effectPairingQuad_parallelogram F x (Complex.I * y)
  have hI : effectPairingQuad (doubleDualEffectPairing F) (Complex.I * y) =
    effectPairingQuad (doubleDualEffectPairing F) y := by
    rw [effectPairingQuad_smul]
  have : star Complex.I * Complex.I = 1 := by
    simp [Complex.conj_I, neg_mul, Complex.I_mul_I]
  rw [this, one_mul]
  rw [hI] at h
exact h

```

#### 4.4.1076 Quantum of the phase of the $\mathbf{i}$

**Statement.** For a natural number  $A$ , a superoperator  $\alpha$ , an index  $v$ : the quadratic effect pairing of  $\alpha$  and  $\text{Complex.I} \cdot v$  equals the quadratic effect pairing of  $\alpha$  and  $v$ .

**Proof.** The key step rewrites with the quadratic effect pairing of a scalar multiple, standard identities for complex numbers and the usual algebraic identities.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/BornPolarForm.lean](#)

```

theorem q_phase_I {A : Nat}
  (a : Superoperator A 1 -> Superoperator 1 1) (v : Fin A -> ?) :
  effectPairingQuad a (Complex.I * v) = effectPairingQuad a v := by
  rw [effectPairingQuad_smul]

```



```

have : star Complex.I * Complex.I = 1 := by
  simp [Complex.conj_I, neg_mul, Complex.I_mul_I]
rw [this, one_mul]

```

#### 4.4.1077 The polarised effect pairing equals a construction from a norm

**Statement.** Our polar equals the OfNorm-style polarization formula.

**Proof.** Both sides are compared pointwise (by extensionality). The claim follows from a chain of equalities (or inequalities). The key step rewrites with the usual algebraic identities, standard identities for complex numbers and the definition of the polarised effect pairing. The remaining identity is a polynomial identity in a commutative ring.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/BornPolarForm.lean](#)

```

theorem effectPairingPolar_eq_ofNorm {A : Nat}
  (a : Superoperator A 1 -> Superoperator 1 1) (x y : Fin A -> ?) :
  effectPairingPolar a x y =
    (effectPairingQuad a (x + y) - effectPairingQuad a (x - y) +
      Complex.I * effectPairingQuad a (Complex.I * x + y) -
      Complex.I * effectPairingQuad a (Complex.I * x - y)) / 4 := by
  have h1 : effectPairingQuad a (x + Complex.I * y) =
    effectPairingQuad a (Complex.I * x - y) := by
    have hmul : Complex.I * (x + Complex.I * y) = Complex.I * x - y := by
      ext i
      simp [Pi.smul_apply, smul_eq_mul, Pi.add_apply]
      ring_nf; rw [Complex.I_sq]; ring
    calc effectPairingQuad a (x + Complex.I * y)
      = effectPairingQuad a (Complex.I * (x + Complex.I * y)) :=
        (q_phase_I a _).symm
      _ = effectPairingQuad a (Complex.I * x - y) := by rw [hmul]
  have h2 : effectPairingQuad a (x - Complex.I * y) =
    effectPairingQuad a (Complex.I * x + y) := by
    have hmul : Complex.I * (x - Complex.I * y) = Complex.I * x + y := by
      ext i
      simp [Pi.smul_apply, smul_eq_mul, Pi.sub_apply]
      ring_nf; rw [Complex.I_sq]; ring
    calc effectPairingQuad a (x - Complex.I * y)
      = effectPairingQuad a (Complex.I * (x - Complex.I * y)) :=
        (q_phase_I a _).symm
      _ = effectPairingQuad a (Complex.I * x + y) := by rw [hmul]
  simp only [effectPairingPolar, h1, h2]
  ring

```

#### 4.4.1078 Polarised effect pairing of a sum, in the left argument

**Statement.** Left additivity of the polarized form (Jordan–von Neumann / OfNorm).

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the fact that the polarised effect pairing equals a construction from a norm and the usual algebraic identities.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/BornPolarForm.lean](#)

```

theorem effectPairingPolar_add_left {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (x y z : Fin A → ?) :
  effectPairingPolar (doubleDualEffectPairing F) (x + y) z =
    effectPairingPolar (doubleDualEffectPairing F) x z +
    effectPairingPolar (doubleDualEffectPairing F) y z := by
set a := doubleDualEffectPairing F
rw [effectPairingPolar_eq_ofNorm a (x + y) z,
    effectPairingPolar_eq_ofNorm a x z,
    effectPairingPolar_eq_ofNorm a y z]
have H1 := effectPairingQuad_parallelogram F (x + y + z) (x - z)
have H2 := effectPairingQuad_parallelogram F (x + y - z) (x + z)
have H3 := effectPairingQuad_parallelogram F (y + z) z
have H4 := effectPairingQuad_parallelogram F (y - z) z
have H5 := effectPairingQuad_parallelogram F
  (Complex.I * (x + y) + z) (Complex.I * x - z)
have H6 := effectPairingQuad_parallelogram F
  (Complex.I * (x + y) - z) (Complex.I * x + z)
have H7 := effectPairingQuad_parallelogram F (Complex.I * y + z) z
have H8 := effectPairingQuad_parallelogram F (Complex.I * y - z) z
have s1 : x + y + z + (x - z) = (2 : ?) * x + y := by
  ext i; simp [two_smul]; ring
have s1' : x + y + z - (x - z) = y + (2 : ?) * z := by
  ext i; simp [two_smul]; ring
have s2 : x + y - z + (x + z) = (2 : ?) * x + y := by
  ext i; simp [two_smul]; ring
have s2' : x + y - z - (x + z) = y - (2 : ?) * z := by
  ext i; simp [two_smul]; ring
have s3 : (y + z) + z = y + (2 : ?) * z := by
  ext i; simp [two_smul]; ring
have s3' : (y + z) - z = y := add_sub_cancel_right y z
have s4 : (y - z) + z = y := sub_add_cancel y z
have s4' : (y - z) - z = y - (2 : ?) * z := by
  ext i; simp [two_smul]; ring
rw [s1, s1'] at H1; rw [s2, s2'] at H2
rw [s3, s3'] at H3; rw [s4, s4'] at H4
have t5 : Complex.I * (x + y) + z + (Complex.I * x - z) =
  Complex.I * ((2 : ?) * x + y) := by
  ext i; simp [two_smul, smul_add, Pi.smul_apply, smul_eq_mul]; ring
have t5' : Complex.I * (x + y) + z - (Complex.I * x - z) =
  Complex.I * y + (2 : ?) * z := by
  ext i; simp [two_smul, smul_add, Pi.smul_apply, smul_eq_mul]; ring
have t6 : Complex.I * (x + y) - z + (Complex.I * x + z) =
  Complex.I * ((2 : ?) * x + y) := by
  ext i; simp [two_smul, smul_add, Pi.smul_apply, smul_eq_mul]; ring
have t6' : Complex.I * (x + y) - z - (Complex.I * x + z) =
  Complex.I * y - (2 : ?) * z := by
  ext i; simp [two_smul, smul_add, Pi.smul_apply, smul_eq_mul]; ring
have t7 : Complex.I * y + z + z = Complex.I * y + (2 : ?) * z := by
  ext i; simp [two_smul]; ring
have t7' : Complex.I * y + z - z = Complex.I * y :=
  add_sub_cancel_right _ _
have t8 : Complex.I * y - z + z = Complex.I * y := sub_add_cancel _ _
have t8' : Complex.I * y - z - z = Complex.I * y - (2 : ?) * z := by
  ext i; simp [two_smul]; ring
rw [t5, t5'] at H5; rw [t6, t6'] at H6

```

```

rw [t7, t7'] at H7; rw [t8, t8'] at H8
have pI2 := q_phase_I a ((2 : ?) * x + y)
have pIy := q_phase_I a y
simp only [a] at H1 H2 H3 H4 H5 H6 H7 H8 pI2 pIy |-
rw [pI2] at H5 H6
rw [pIy] at H7 H8
rw [ <- add_div]
refine congrArg (fun t : ? => t / 4) ?_
linear_combination
  (-H1 + H2 + H3 - H4 + Complex.I * (-H5 + H6 + H7 - H8)) / 2

```

#### 4.4.1079 Polarised effect pairing of zero, in the left argument

**Statement.** For a natural number  $A$ , an index  $y$ : the polarised effect pairing of the double dual effect pairing of  $F$  and  $y$  at  $0$  equals  $0$ .

**Proof.** The goal is simplified using the fact that zero is a left unit for addition for finitely supported sums.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/BornPolarForm.lean](#)

```

theorem effectPairingPolar_zero_left {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (y : Fin A -> ?) :
  effectPairingPolar (doubleDualEffectPairing F) 0 y = 0 := by
have h := effectPairingPolar_add_left F 0 0 y
simp only [zero_add] at h
exact (add_eq_left.mp h.symm)

```

#### 4.4.1080 Polarised effect pairing of a natural-number multiple, in the left argument

**Statement.** For natural numbers  $A, n$ , indexes  $x, y$ : the polarised effect pairing of the double dual effect pairing of  $F, n \cdot x, y$  equals the product of  $n$  and the polarised effect pairing of  $\text{doubleDualEffectPairing } F, x, y$ .

**Proof.** By induction on the natural number  $n$ . For zero, the claim is checked directly; for a successor, the claim follows from the induction hypothesis. The key step rewrites with the polarised effect pairing of zero, in the left argument and the polarised effect pairing of a sum, in the left argument. The remaining identity is a polynomial identity in a commutative ring.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/BornPolarForm.lean](#)

```

theorem effectPairingPolar_nsmul_left {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (n : Nat) (x y : Fin A -> ?) :
  effectPairingPolar (doubleDualEffectPairing F) (n * x) y =
    (n : ?) * effectPairingPolar (doubleDualEffectPairing F) x y := by
induction n with
| zero => simp [effectPairingPolar_zero_left]
| succ n ih =>
  rw [succ_nsmul, effectPairingPolar_add_left, ih]

```

```
push_cast
ring
```

```
/-! ### Polar sesquilinearity, density recovery, PSD, trace -/
```

#### 4.4.1081 Polar sesquilinearity, density recovery, PSD, trace

**Statement.** ### Polar sesquilinearity, density recovery, PSD, trace. Formally:  $\text{effectPairingQuad } \alpha \ (-v) = \text{effectPairingQuad } \alpha \ v$ .

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the quadratic effect pairing of a scalar multiple. The remaining numerical facts are checked by direct computation.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/BornPolarForm.lean](#)

```
theorem q_neg {A : Nat} (a : Superoperator A 1 -> Superoperator 1 1)
  (v : Fin A -> ?) :
  effectPairingQuad a (-v) = effectPairingQuad a v := by
  have hv : -v = (-1 : ?) * v := by ext i; simp
  rw [hv, effectPairingQuad_smul]
  norm_num
```

#### 4.4.1082 Quadratic effect pairing of an adjoint

**Statement.** For a natural number  $A$ , a superoperator  $\alpha$ , an index  $v$ : the adjoint of the quadratic effect pairing of  $\alpha$  and  $v$  equals the quadratic effect pairing of  $\alpha$  and  $v$ .

**Proof.** Both sides are compared pointwise (by extensionality). The goal is simplified using standard identities for complex numbers and the extensionality for bilinear maps.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/BornPolarForm.lean](#)

```
theorem effectPairingQuad_star {A : Nat}
  (a : Superoperator A 1 -> Superoperator 1 1) (v : Fin A -> ?) :
  star (effectPairingQuad a v) = effectPairingQuad a v := by
  have him := (effectPairingQuad_nonneg a v).2
  apply Complex.ext
  * simp [Complex.conj_re]
  * simp [Complex.conj_im, him]
```

#### 4.4.1083 Symmetry of the polarised effect pairing of the complex conjugate

**Statement.** For a natural number  $A$ , indexes  $x, y$ : the adjoint of the polarised effect pairing of double  $\text{DualEffectPairing } F, y, x$  equals the polarised effect pairing of the double dual effect pairing of  $F, x, y$ .

**Proof.** Both sides are compared pointwise (by extensionality). The claim follows from a chain of equalities (or inequalities). The key step rewrites with the definition of the polarised effect pairing, the definition of the quantum, the usual algebraic identities and standard identities for complex numbers.

**Lean 4 source QLambda/Domain/Presheaf/RepresentableBipolar/BornPolarForm.lean**

```

theorem effectPairingPolar_conj_symm {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (x y : Fin A -> ?) :
  star (effectPairingPolar (doubleDualEffectPairing F) y x) =
    effectPairingPolar (doubleDualEffectPairing F) x y := by
set a := doubleDualEffectPairing F
set Q := effectPairingQuad a
simp only [effectPairingPolar]
have hQ : forall v, star (Q v) = Q v := fun v => by
  simp [Q] using effectPairingQuad_star a v
have hyx : y + x = x + y := add_comm _ _
have hyxm : Q (y - x) = Q (x - y) := by
  have : y - x = -(x - y) := by
    ext i; simp [Pi.sub_apply, Pi.neg_apply, sub_eq_add_neg]
  rw [this]; simp [Q] using q_neg a (x - y)
have h1 : Q (y + Complex.I * x) = Q (x - Complex.I * y) := by
  have hmul : Complex.I * (x - Complex.I * y) = Complex.I * x + y := by
    ext i; simp [Pi.smul_apply, smul_eq_mul, Pi.sub_apply, Pi.add_apply]
  ring_nf; rw [Complex.I_sq]; ring
have hcomm : y + Complex.I * x = Complex.I * x + y := add_comm _ _
calc Q (y + Complex.I * x)
  = Q (Complex.I * x + y) := by rw [hcomm]
  _ = Q (Complex.I * (x - Complex.I * y)) := by rw [ <- hmul]
  _ = Q (x - Complex.I * y) := by simp [Q] using q_phase_I a _
have h2 : Q (y - Complex.I * x) = Q (x + Complex.I * y) := by
  have hmul : (-Complex.I) * (x + Complex.I * y) = y - Complex.I * x := by
    ext i; simp [Pi.smul_apply, smul_eq_mul, Pi.sub_apply, Pi.add_apply]
  ring_nf; rw [Complex.I_sq]; ring
have hphase : Q ((-Complex.I) * (x + Complex.I * y)) =
  Q (x + Complex.I * y) := by
  simp only [Q]
  rw [effectPairingQuad_smul]
  have : star ((-Complex.I : ?)) * (-Complex.I) = 1 := by
    apply Complex.ext <=> simp [Complex.conj_I, Complex.I_mul_I]
  rw [this, one_mul]
calc Q (y - Complex.I * x)
  = Q ((-Complex.I) * (x + Complex.I * y)) := by rw [ <- hmul]
  _ = Q (x + Complex.I * y) := hphase
have hstarI : star (Complex.I : ?) = -Complex.I := Complex.conj_I
have hnum :
  star (Q (y + x) - Q (y - x) -
    Complex.I * Q (y + Complex.I * x) +
    Complex.I * Q (y - Complex.I * x)) =
  Q (x + y) - Q (x - y) -
    Complex.I * Q (x + Complex.I * y) +
    Complex.I * Q (x - Complex.I * y) := by
  simp only [star_sub, star_add, star_mul, hQ, hyx, hyxm, h1, h2, hstarI]
  ring
have hdiv : star ((Q (y + x) - Q (y - x) -
  Complex.I * Q (y + Complex.I * x) +
  Complex.I * Q (y - Complex.I * x)) / 4) =
  star (Q (y + x) - Q (y - x) -
    Complex.I * Q (y + Complex.I * x) +

```

```

      Complex.I * Q (y - Complex.I * x)) / 4 := by
    rw [star_div_0]
    simp [star_ofNat]
    rw [hdiv, hnum]

```

#### 4.4.1084 Polarised effect pairing of a sum, in the right argument

**Statement.** For a natural number  $A$ , indexes  $x, y, z$ : the polarised effect pairing of the double dual effect pairing of  $F, x$ , the sum of  $y$  and  $z$  equals the sum of the polarised effect pairing of `doubleDualEffectPairing`  $F, x, y$  and the polarised effect pairing of `doubleDualEffectPairing`  $F, x, z$ .

**Proof.** The claim follows from a chain of equalities (or inequalities). The key step rewrites with the polarised effect pairing of a sum, in the left argument.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/BornPolarForm.lean`

```

theorem effectPairingPolar_add_right {A : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj 1).Carrier)
  (x y z : Fin A -> ?) :
  effectPairingPolar (doubleDualEffectPairing F) x (y + z) =
    effectPairingPolar (doubleDualEffectPairing F) x y +
    effectPairingPolar (doubleDualEffectPairing F) x z := by
-- conj_symm: star B(b,a) = B(a,b)
have hyx := effectPairingPolar_conj_symm F x y
have hzx := effectPairingPolar_conj_symm F x z
have hyzx := effectPairingPolar_conj_symm F x (y + z)
calc effectPairingPolar (doubleDualEffectPairing F) x (y + z)
  = star (effectPairingPolar (doubleDualEffectPairing F) (y + z) x) := hyzx.symm
  _ = star (effectPairingPolar (doubleDualEffectPairing F) y x +
    effectPairingPolar (doubleDualEffectPairing F) z x) := by
    rw [effectPairingPolar_add_left]
  _ = star (effectPairingPolar (doubleDualEffectPairing F) y x) +
    star (effectPairingPolar (doubleDualEffectPairing F) z x) := star_add _ _
  _ = effectPairingPolar (doubleDualEffectPairing F) x y +
    effectPairingPolar (doubleDualEffectPairing F) x z := by
    rw [hyx, hzx]

```

#### 4.4.1085 Fiber-1 packaging of an effect $A \rightarrow 1$ into $\neg y(A)_1$

**Definition.** Fiber-1 packaging of an effect  $A \rightarrow 1$  into  $\neg y(A)_1$ .

**Construction.** Defined to be the dual fiber bilinear map of  $A$  and the composite of  $e$  after `Superoperator.tensorLeftUnitor`  $A$  at  $1$ .

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/EffectFamily.lean`

```

noncomputable def effectPack (A : Nat) (e : Superoperator A 1) :
  ((DayNegation.neg (representable A)).obj 1).Carrier :=
  dualFiberBilinear A 1
  (Superoperator.comp e (Superoperator.tensorLeftUnitor A))

```

#### 4.4.1086 Effect-family pairing of a double-dual element against fiber-1 effects

**Definition.** Effect-family pairing of a double-dual element against fiber-1 effects. Strips Day braiding /  $1 \star n$  unitor so the result matches `effectPrecompose`.

**Construction.** Defined to be the composite of the composite of `F.app (Superoperator.identity n) (effectPack A e)` after `Superoperator.tensorSwap 1 n` after the inverse tensor left unitor of `n`.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/EffectFamily.lean`

```
noncomputable def doubleDualEffectPairing {A n : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier)
  (e : Superoperator A 1) : Superoperator n 1 :=
  Superoperator.comp
    (Superoperator.comp
      (F.app (Superoperator.identity n) (effectPack A e))
      (Superoperator.tensorSwap 1 n))
    (Superoperator.tensorLeftUnitorInv n)
```

#### 4.4.1087 On the unit image, the effect pairing recovers ordinary precomposition

**Statement.** On the unit image, the effect pairing recovers ordinary precomposition. Formally: `doubleDualEffectPairing ((DayNegation.unit (representable A)).app n  $\Phi$ ) e = effectPrecompose  $\Phi$  e`.

**Proof.** The key step rewrites with the evaluating the unit against an arbitrary dual bilinear recovers `b(id,  $\Phi$ )` after the Day braiding, the dual fiber at `q = 1` recovers ordinary effect precomposition (up to the left unitor  $1 \star A \simeq A$ ), the fact that composition for superoperators is associative and the fact that the tensor swap is an involution.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/EffectFamily.lean`

```
theorem doubleDualEffectPairing_unit {A n : Nat}
  (? : Superoperator n A) (e : Superoperator A 1) :
  doubleDualEffectPairing
    ((DayNegation.unit (representable A)).app n ?) e =
  effectPrecompose ? e := by
  change Superoperator n A at ?
  unfold doubleDualEffectPairing effectPack
  have hraw :
    ((DayNegation.unit (representable A)).app n ?).app
      (Superoperator.identity n)
      (dualFiberBilinear A 1
        (Superoperator.comp e (Superoperator.tensorLeftUnitor A))) =
    Superoperator.comp
      (Superoperator.comp (effectPrecompose ? e)
        (Superoperator.tensorLeftUnitor n))
      (Superoperator.tensorSwap n 1) := by
  rw [unit_eval_bilinear, dualFiberBilinear_one_app]
  rw [hraw]
  have h1 :
```

```

Superoperator.comp
  (Superoperator.comp
    (Superoperator.comp (effectPrecompose ? e)
      (Superoperator.tensorLeftUnitor n))
    (Superoperator.tensorSwap n 1))
  (Superoperator.tensorSwap 1 n) =
Superoperator.comp (effectPrecompose ? e)
  (Superoperator.tensorLeftUnitor n) := by
rw [ <- Superoperator.comp_assoc,
  Superoperator.tensorSwap_involutive 1 n,
  Superoperator.comp_identity]
rw [h1, <- Superoperator.comp_assoc, Superoperator.tensorLeftUnitor_hom_inv,
  Superoperator.comp_identity]

```

#### 4.4.1088 Pairing agreement implies raw evaluation agrees on every effect pack

**Statement.** Pairing agreement implies raw evaluation agrees on every effectPack.

**Proof.** The key step rewrites with the fact that composition for superoperators is associative, the fact that the tensor left unitor and its inverse compose to the identity, the composition of the identity for superoperators and the fact that composition on the right by tensor swap is injective.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/EffectFamily.lean](#)

```

theorem pairing_eq_imp_app_effectPack {A n : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier)
  (? : Superoperator n A)
  (ha : forall e : Superoperator A 1,
    doubleDualEffectPairing F e = effectPrecompose ? e)
  (e : Superoperator A 1) :
F.app (Superoperator.identity n) (effectPack A e) =
  ((DayNegation.unit (representable A)).app n ?).app
    (Superoperator.identity n) (effectPack A e) := by
have heq :
  doubleDualEffectPairing F e =
    doubleDualEffectPairing
      ((DayNegation.unit (representable A)).app n ?) e :=
  (ha e).trans (doubleDualEffectPairing_unit ? e).symm
change
  Superoperator.comp
    (Superoperator.comp
      (F.app (Superoperator.identity n) (effectPack A e))
      (Superoperator.tensorSwap 1 n))
    (Superoperator.tensorLeftUnitorInv n) =
Superoperator.comp
  (Superoperator.comp
    ((DayNegation.unit (representable A)).app n ?).app
      (Superoperator.identity n) (effectPack A e))
    (Superoperator.tensorSwap 1 n))
  (Superoperator.tensorLeftUnitorInv n) at heq
have heq2 :=
  congrArg
    (fun chi : Superoperator n 1 =>
      Superoperator.comp chi (Superoperator.tensorLeftUnitor n)) heq

```



```

have hcancel (? : Superoperator (1 * n) 1) :
  Superoperator.comp
    (Superoperator.comp ? (Superoperator.tensorLeftUnitorInv n))
    (Superoperator.tensorLeftUnitor n) =
  ? := by
  rw [ <- Superoperator.comp_assoc, Superoperator.tensorLeftUnitor_inv_hom,
    Superoperator.comp_identity]
  rw [hcancel, hcancel] at heq2
  exact comp_tensorSwap_injective heq2

```

#### 4.4.1089 Born scalar of a $1 \rightarrow 1$ map on the unit input

**Definition.** Born scalar of a  $1 \rightarrow 1$  map on the unit input.

**Construction.** Defined to be  $\chi.\text{cp.applyMat } (1 : \text{Matrix } (\text{Fin } 1) (\text{Fin } 1) \mathbb{C}) \ 0 \ 0$ .

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/EffectFamily.lean](#)

```

noncomputable def bornScalar (chi : Superoperator 1 1) : ? :=
  chi.cp.applyMat (1 : Matrix (Fin 1) (Fin 1) ?) 0 0

```

#### 4.4.1090 Born-rule scalar of a precomposition with an effect

**Statement.** For a natural number  $A$ , superoperators  $\Phi, e$ : the Born-rule scalar of the precomposition with an effect of  $\Phi$  and  $e$  equals the trace of the product of the effect and  $\Phi.\text{cp.applyMat } (1 : \text{Matrix } (\text{Fin } 1) (\text{Fin } 1) \mathbb{C})$ .

**Proof.** The goal is simplified using the definition of the Born-rule scalar, the definition of the precomposition with an effect, the underlying completely positive map of a composite for superoperators and the action on a matrix of a composition.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/EffectFamily.lean](#)

```

theorem bornScalar_effectPrecompose {A : Nat}
  (? : Superoperator 1 A) (e : Superoperator A 1) :
  bornScalar (effectPrecompose ? e) =
  Matrix.trace
    (e.cp.effect * ?.cp.applyMat (1 : Matrix (Fin 1) (Fin 1) ?)) := by
  simp only [bornScalar, effectPrecompose, Superoperator.cp_comp,
    CMap.applyMat_comp]
  have ht :
    Matrix.trace (e.cp.applyMat (?.cp.applyMat 1)) =
    e.cp.applyMat (?.cp.applyMat 1) 0 0 := by
  simp [Matrix.trace, Fin.default_eq_zero]
  exact ht.symm.trans (CMap.trace_applyMat_eq_effect e.cp _)

```

#### 4.4.1091 Effect expectation of a $1 \rightarrow 1$ -valued pairing on a Loewner matrix

**Definition.** Effect expectation of a  $1 \rightarrow 1$ -valued pairing on a Loewner matrix.

**Construction.** Defined to be the Born-rule scalar of  $\alpha$  (ofEffect E hpsd hle).

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/EffectFamily.lean](#)

```
noncomputable def effectExpectation {A : Nat}
  (a : Superoperator A 1 -> Superoperator 1 1)
  (E : Matrix (Fin A) (Fin A) ?)
  (hpsd : E.PosSemidef) (hle : E <= 1) : ? :=
  bornScalar (a (ofEffect E hpsd hle))
```

#### 4.4.1092 Effect expectation of the unit

**Statement.** For a natural number A, a superoperator  $\Phi$ , a matrix E: if E is positive semidefinite and  $E \leq 1$ , then effectExpectation (effectPrecompose  $\Phi$ ) E hpsd hle equals the trace of the product of E and  $\Phi$ .cp.applyMat (1 : Matrix (Fin 1) (Fin 1)  $\mathbb{C}$ ).

**Proof.** The goal is simplified using the definition of the effect expectation, the Born-rule scalar of a precomposition with an effect and the map determined by an effect of the effect.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/EffectFamily.lean](#)

```
theorem effectExpectation_unit {A : Nat}
  (? : Superoperator 1 A)
  (E : Matrix (Fin A) (Fin A) ?)
  (hpsd : E.PosSemidef) (hle : E <= 1) :
  effectExpectation (effectPrecompose ?) E hpsd hle =
  Matrix.trace (E * ?.cp.applyMat (1 : Matrix (Fin 1) (Fin 1) ?)) := by
  simp only [effectExpectation, bornScalar_effectPrecompose, ofEffect_effect]
```

#### 4.4.1093 Uniqueness half of the analytic gate: an effect pairing determines at most one $\Phi$ (effect precompose injectivity)

**Statement.** Uniqueness half of the analytic gate: an effect pairing determines at most one  $\Phi$  (effect Precompose\_injective). Formally:  $\Phi = \Psi$ .

**Proof.** This is an instance of the effects separate superoperators:  $\forall e, e \circ \Phi = e \circ \Psi$  implies  $\Phi = \Psi$ , applied to the hypothesis that for every e, effectPrecompose  $\Phi$  e = effectPrecompose  $\Psi$  e.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/EffectFamily.lean](#)

```
theorem effect_pairing_unique {A n : Nat}
  {? ? : Superoperator n A}
  (h : forall e : Superoperator A 1,
    effectPrecompose ? e = effectPrecompose ? e) :
  ? = ? :=
  effectPrecompose_injective h

/-! ## n=1 analytic reconstruction (preparations) -/
```

#### 4.4.1094 A real scalar matrix $z \cdot \mathbf{I}_1$ is Loewner-below $\mathbf{I}_1$ when $0 \leq z \leq 1$

**Statement.** A real scalar matrix  $z \cdot \mathbf{I}_1$  is Loewner-below  $\mathbf{I}_1$  when  $0 \leq z \leq 1$ . Formally: `Matrix.of fun _ => (1 : Matrix (Fin 1) (Fin 1) ℂ)`.

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the characterization of the order for subnormalized density matrices, the usual algebraic identities, the hypothesis that  $z.im = 0$  and standard identities for complex numbers.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/EffectFamily.lean`

```
theorem scalar_matrix_le_one (z : ?) (_hre : 0 <= z.re) (hle : z.re <= 1)
  (him : z.im = 0) :
  (Matrix.of fun _ => (1 : Matrix (Fin 1) (Fin 1) ?) <=
  have hz :
    Matrix.of (fun _ => z) = diagonal (fun _ => z) := by
    ext i j; fin_cases i; fin_cases j; simp [diagonal]
  have h1 :
    (1 : Matrix (Fin 1) (Fin 1) ?) =
    diagonal (fun _ => (1 : ?)) := by
    ext i j; fin_cases i; fin_cases j; simp [diagonal]
  rw [hz, h1, Matrix.le_iff, diagonal_sub]
  refine PosSemidef.diagonal fun i => ?_
  fin_cases i
  refine Complex.nonneg_iff.mpr <?_, ?_>
  * simp; linarith
  * simp [him]
```

#### 4.4.1095 Package a subnormalized density $\rho$ ( $\rho \succeq 0$ )

**Definition.** Package a subnormalized density  $\rho$  ( $\rho \succeq 0$ ,  $\text{Tr } \rho \leq 1$ ) as a preparation Superoperator `1 A` with Choi block equal to  $\rho$ .

**Construction.** Constructed interactively; both sides are compared pointwise (by extensionality). Each component of the claim is established separately. The key step rewrites with the definition of the effect, the definition of the classical, standard identities for matrices and the hypothesis that  $\rho$  is positive semidefinite.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/EffectFamily.lean`

```
noncomputable def preparationOfDensity {A : Nat}
  (? : Matrix (Fin A) (Fin A) ?)
  (hpsd : ?.PosSemidef)
  (hle : (Matrix.trace ?).re <= 1) : Superoperator 1 A := by
  let C : Matrix (Fin A x Fin 1) (Fin A x Fin 1) ? := fun p q => ? p.1 q.1
  have hC : C.PosSemidef := by
    have : C =
      ?.submatrix (Prod.fst : Fin A x Fin 1 -> Fin A)
      (Prod.fst : Fin A x Fin 1 -> Fin A) := by
    ext; rfl
  rw [this]; exact hpsd.submatrix _
  refine <<C, hC>, (traceNonincreasing_iff_effect_le_one _).mpr ?_>
  have heff :
    (<C, hC> : CPMMap 1 A).effect =
```

```

      Matrix.of fun _ _ : Fin 1 => Matrix.trace ? := by
    ext i j
    fin_cases i; fin_cases j
    simp only [CMap.eff, C, Matrix.trace, Matrix.of_apply, diag]
    have htr_nn : 0 <= (Matrix.trace ?).re :=
      (Complex.nonneg_iff.mp (Matrix.PosSemidef.trace_nonneg hpsd)).1
    have him0 : (Matrix.trace ?).im = 0 :=
      (Complex.nonneg_iff.mp (Matrix.PosSemidef.trace_nonneg hpsd)).2.symm
    rw [heff]
    exact scalar_matrix_le_one _ htr_nn hle him0

```

#### 4.4.1096 Preparation of density matrix of the Choi matrix

**Statement.** For a natural number  $A$ , a matrix  $\rho$ , indexes  $p, q$ : if  $\rho$  is positive semidefinite and  $(\text{tr } \rho) \cdot \text{re} \leq 1$ , then  $(\text{preparationOfDensity } \rho \text{ hpsd hle}).\text{cp.choi } p \ q = \rho \ p.1 \ q.1$ .

**Proof.** By definition. Unfolding the Choi matrix turns the left-hand side,  $(\text{preparationOfDensity } \rho \text{ hpsd hle}).\text{cp.choi } p \ q$ , into the right-hand side,  $\rho \ p.1 \ q.1$ ; the two sides are the same term.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/EffectFamily.lean](#)

```

theorem preparationOfDensity_choi {A : Nat}
  (? : Matrix (Fin A) (Fin A) ?)
  (hpsd : ?.PosSemidef)
  (hle : (Matrix.trace ?).re <= 1) (p q : Fin A x Fin 1) :
  (preparationOfDensity ? hpsd hle).cp.choi p q = ? p.1 q.1 :=
  rfl

```

#### 4.4.1097 Applying a preparation to $I_1$ recovers the packaged density

**Statement.** Applying a preparation to  $I_1$  recovers the packaged density. Formally:  $(\text{preparationOfDensity } \rho \text{ hpsd hle}).\text{cp.applyMat } (1 : \text{Matrix } (\text{Fin } 1) (\text{Fin } 1) \mathbb{C}) = \rho$ .

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the Choi matrix of the Kraus presentation, standard identities for matrices and the preparation of density matrix of the Choi matrix.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/EffectFamily.lean](#)

```

theorem preparationOfDensity_applyMat_one {A : Nat}
  (? : Matrix (Fin A) (Fin A) ?)
  (hpsd : ?.PosSemidef)
  (hle : (Matrix.trace ?).re <= 1) :
  (preparationOfDensity ? hpsd hle).cp.applyMat
    (1 : Matrix (Fin 1) (Fin 1) ?) = ? := by
  ext a b
  have h :=
    KrausFamily.applyMat_apply
      (CMap.toKraus (preparationOfDensity ? hpsd hle).cp) 1 a b
  change
    KrausFamily.applyMat

```

```

      (CMap.toKraus (preparationOfDensity ? hpsd hle).cp) 1 a b =
    ? a b
  rw [h, CMap.choi_toKraus]
  simp [Matrix.one_apply, preparationOfDensity_choi]

```

#### 4.4.1098 $1 \rightarrow 1$ superoperators are determined by their Born scalar on $\mathbb{I}_1$

**Statement.**  $1 \rightarrow 1$  superoperators are determined by their Born scalar on  $\mathbb{I}_1$ . Formally:  $\chi = \psi$ .

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the definition of the Born-rule scalar, the action on a matrix of a scalar multiple for completely positive maps, the extensionality for superoperators and the pointwise formula for the extensionality.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/EffectFamily.lean](#)

```

theorem superoperator_one_one_eq_of_bornScalar
  {chi psi : Superoperator 1 1} (h : bornScalar chi = bornScalar psi) :
  chi = psi := by
  apply Superoperator.ext
  apply CMap.ext_apply
  intro ?
  have h? : ? = ? 0 0 * (1 : Matrix (Fin 1) (Fin 1) ?) := by
    ext i j; fin_cases i; fin_cases j; simp
  have h1 : chi.cp.applyMat 1 = psi.cp.applyMat 1 := by
    ext i j; fin_cases i; fin_cases j
    simp [bornScalar] using h
  rw [h?, CMap.applyMat_smul, CMap.applyMat_smul, h1]

```

#### 4.4.1099 Every effect $A \rightarrow 1$ equals map determined by an effect of its intrinsic effect matrix

**Statement.** Every effect  $A \rightarrow 1$  equals `ofEffect` of its intrinsic effect matrix.

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the definition of the effect, standard identities for finite indices, the extensionality for superoperators and the extensionality for completely positive maps.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/EffectFamily.lean](#)

```

theorem ofEffect_effect_eq {A : Nat} (e : Superoperator A 1) :
  ofEffect e.cp.effect (CMap.effect_posSemidef e.cp)
    ((traceNonincreasing_iff_effect_le_one e.cp).1 e.trace_nonincreasing) =
  e := by
  apply Superoperator.ext
  apply CMap.ext
  ext p q
  have hchoi :
    (ofEffect e.cp.effect (CMap.effect_posSemidef e.cp)
      ((traceNonincreasing_iff_effect_le_one e.cp).1
        e.trace_nonincreasing)).cp.choi p q =
    e.cp.effect q.2 p.2 :=
  rfl

```

```

rw [hchoi]
simp only [CMap.effect, Fin.sum_univ_one]
congr 1
* exact Prod.ext (Subsingleton.elim _ _) rfl
* exact Prod.ext (Subsingleton.elim _ _) rfl

```

#### 4.4.1100 Choi additivity of map determined by an effect on Loewner-summable effects

**Statement.** Choi additivity of `ofEffect` on Loewner-summable effects. Formally:  $(\text{ofEffect } (E + F) \text{ (hE.add hF) hEF}).\text{cp} = (\text{ofEffect } E \text{ hE hE1}).\text{cp} + (\text{ofEffect } F \text{ hF hF1}).\text{cp}$ .

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with standard identities for matrices and the extensionality for completely positive maps.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/EffectFamily.lean](#)

```

theorem ofEffect_add_choi {A : Nat}
  (E F : Matrix (Fin A) (Fin A) ?)
  (hE : E.PosSemidef) (hF : F.PosSemidef)
  (hEF : E + F <= 1) (hE1 : E <= 1) (hF1 : F <= 1) :
  (ofEffect (E + F) (hE.add hF) hEF).cp =
    (ofEffect E hE hE1).cp + (ofEffect F hF hF1).cp := by
  apply CMap.ext
  ext p q
  change (E + F) q.2 p.2 = E q.2 p.2 + F q.2 p.2
  rw [Matrix.add_apply]

```

#### 4.4.1101 Norm squared adjoint of $v$ and $v$ is a nonnegative real

**Statement.** Norm squared  $\text{star } v \cdot_v v$  is a nonnegative real. Formally:  $0 \leq (\text{star } v \cdot v).\text{re} \wedge (\text{star } v \cdot v).\text{im} = 0$ .

**Proof.** Each component of the claim is established separately.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/EffectFamily.lean](#)

```

theorem star_dotProduct_self_nonneg_real {α : Type*} [Fintype α]
  (v : α → ℂ) :
  0 <= (star v ?? v).re /\ (star v ?? v).im = 0 := by
  have hnn : (0 : ℝ) <= star v ?? v := dotProduct_star_self_nonneg v
  exact <(Complex.nonneg_iff.mp hnn).1, (Complex.nonneg_iff.mp hnn).2.symm>

```

#### 4.4.1102 Normalize a nonzero vector to unit length using the real square root of its squared norm

**Definition.** Normalize a nonzero vector to unit length using the real square root of its squared norm.

**Construction.** Defined to be  $v$  scaled by  $\text{let nrm} := \text{star } v \cdot v \text{ let } s : \mathbb{C} := \text{Real.sqrt nrm.re } s^{-1}$ .

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/EffectFamily.lean`

```
noncomputable def normalizeVec {α : Type*} [Fintype α] (v : α → ℂ)
  (_hv : star v ?? v != 0) : α → ℂ :=
  let nrm := star v ?? v
  let s : α := (Real.sqrt nrm.re : ℝ)
  s⁻¹ * v
```

#### 4.4.1103 Normalize vector of the norm

**Statement.** If  $\text{star } v \cdot v \neq 0$ , then  $\text{star } (\text{normalizeVec } v \text{ hv}) \cdot \text{normalizeVec } v \text{ hv} = 1$ .

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with standard identities for complex numbers.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/EffectFamily.lean`

```
theorem normalizeVec_norm {α : Type*} [Fintype α] (v : α → ℂ)
  (hv : star v ?? v != 0) :
  star (normalizeVec v hv) ?? normalizeVec v hv = 1 := by
  let nrm := star v ?? v
  let s : α := (Real.sqrt nrm.re : ℝ)
  have hre : 0 ≤ nrm.re := (star_dotProduct_self_nonneg_real v).1
  have him : nrm.im = 0 := (star_dotProduct_self_nonneg_real v).2
  have hs_ne : s != 0 := by
    intro hs0
    have hre0 : nrm.re = 0 :=
      (Real.sqrt_eq_zero hre).1 (by
        have : (s : ℝ).re = 0 := by
          simp [Complex.ofReal_re] using CongrArg Complex.re hs0
          simp [s, Complex.ofReal_re] using this)
    exact hv (Complex.ext hre0 him)
  have hstar_s : star s = s := by
    simp only [s, Complex.star_def, Complex.conj_ofReal]
  have hv_norm : nrm = s * s := by
    apply Complex.ext
    * have hims : s.im = 0 := by simp [s]
    have : nrm.re = s.re * s.re := by
      simp [s, Complex.ofReal_re] using (Real.mul_self_sqrt hre).symm
      simp [Complex.mul_re, hims] using this
    * simp [Complex.mul_im, him, s]
  change star (s⁻¹ * v) ?? (s⁻¹ * v) = 1
  rw [star_dotProduct_smul_self]
  change star s⁻¹ * s⁻¹ * nrm = 1
  rw [hv_norm, star_inv_0, hstar_s]
  field_simp [hs_ne]
```

#### 4.4.1104 Homogeneous quadratic form of an effect pairing on vectors, via Born reading of the normalized rank-one Loewner probe

**Definition.** Homogeneous quadratic form of an effect pairing on vectors, via Born reading of the normalized rank-one Loewner probe.

**Construction.** Defined by an explicit formula built from the adjoint, the Born-rule scalar, the map determined by an effect and the outer product.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/EffectFamily.lean](#)

```
noncomputable def effectPairingQuad {A : Nat}
  (a : Superoperator A 1 -> Superoperator 1 1) (v : Fin A -> ?) : ? :=
  let nrm := star v ?? v
  if h : nrm = 0 then 0
  else
    nrm *
    bornScalar
    (a (ofEffect
      (Matrix.vecMulVec (normalizeVec v h) (star (normalizeVec v h)))
      (Matrix.posSemidef_vecMulVec_self_star _)
      (vecMulVec_unit_le_one _ (normalizeVec_norm v h))))
```

#### 4.4.1105 Polarization of a quadratic form into a candidate sesquilinear reading

**Definition.** Polarization of a quadratic form into a candidate sesquilinear reading.

**Construction.** Defined by an explicit formula built from the quadratic effect pairing.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/EffectFamily.lean](#)

```
noncomputable def effectPairingPolar {A : Nat}
  (a : Superoperator A 1 -> Superoperator 1 1)
  (x y : Fin A -> ?) : ? :=
  let q := effectPairingQuad a
  (q (x + y) - q (x - y) -
    Complex.I * q (x + Complex.I * y) +
    Complex.I * q (x - Complex.I * y)) / 4
```

#### 4.4.1106 Density matrix recovered by polarization of the Born quadratic form on the standard basis

**Definition.** Density matrix recovered by polarization of the Born quadratic form on the standard basis.

**Construction.** The map sending  $i \ j$  to the polarised effect pairing of  $\alpha$ , the single-entry element of  $i$  at 1, the single-entry element of  $j$  at 1.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/EffectFamily.lean](#)

```
noncomputable def densityFromEffectPairing {A : Nat}
  (a : Superoperator A 1 -> Superoperator 1 1) :
  Matrix (Fin A) (Fin A) ? :=
```



```

fun i j =>
  effectPairingPolar a (Pi.single i (1 : ?)) (Pi.single j (1 : ?))

```

#### 4.4.1107 Existence half of the analytic gate at fiber $n = 1$

**Statement.** Existence half of the analytic gate at fiber  $n = 1$ : a Born pairing on Loewner effects that is represented by a subnormalized density  $\rho$  yields a preparation  $\Phi$  with  $e \circ \Phi = \alpha e$  for every effect  $e$ . Formally:  $\exists \Phi : \text{Superoperator } 1 \ A, \forall e : \text{Superoperator } A \ 1, \text{effectPrecompose } \Phi \ e = \alpha e$ .

**Proof.** The claim follows from a chain of equalities (or inequalities). Each component of the claim is established separately. The key step rewrites with the applying a preparation to  $\mathbb{I}_1$  recovers the packaged density and the fact that  $1 \rightarrow 1$  superoperators are determined by their Born scalar on  $\mathbb{I}_1$ .

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/EffectFamily.lean](#)

```

theorem exists_superoperator_of_effect_pairing {A : Nat}
  (a : Superoperator A 1 -> Superoperator 1 1)
  (? : Matrix (Fin A) (Fin A) ?)
  (hpsd : ?.PosSemidef)
  (hle : (Matrix.trace ?).re <= 1)
  (ha : forall (E : Matrix (Fin A) (Fin A) ?)
    (hE : E.PosSemidef) (hEle : E <= 1),
    bornScalar (a (ofEffect E hE hEle)) = Matrix.trace (E * ?)) :
  exists ? : Superoperator 1 A,
    forall e : Superoperator A 1, effectPrecompose ? e = a e := by
  refine <preparationOfDensity ? hpsd hle, fun e => ?_>
  apply superoperator_one_one_eq_of_bornScalar
  have heff := ofEffect_effect_eq e
  have hEpsd : e.cp.effect.PosSemidef := CMap.eff_posSemidef e.cp
  have hEle : e.cp.effect <= 1 :=
    (traceNonincreasing_iff_effect_le_one e.cp).1 e.trace_nonincreasing
  calc
    bornScalar (effectPrecompose (preparationOfDensity ? hpsd hle) e) =
      Matrix.trace
        (e.cp.effect *
          (preparationOfDensity ? hpsd hle).cp.applyMat
            (1 : Matrix (Fin 1) (Fin 1) ?)) :=
      bornScalar_effectPrecompose _ _
  _ = Matrix.trace (e.cp.effect * ?) := by
    rw [preparationOfDensity_applyMat_one]
  _ = bornScalar (a (ofEffect e.cp.effect hEpsd hEle)) :=
    (ha e.cp.effect hEpsd hEle).symm
  _ = bornScalar (a e) := by rw [heff]

```

#### 4.4.1108 On the unit image, the Born pairing is represented by $\Phi(\mathbb{I}_1)$

**Statement.** On the unit image, the Born pairing is represented by  $\Phi(\mathbb{I}_1)$ . Formally:  $\text{bornScalar} (\text{effectPrecompose } \Phi (\text{ofEffect } E \ hE \ hEle)) = \text{tr } (E * \Phi.\text{cp.applyMat } (1 : \text{Matrix } (\text{Fin } 1) (\text{Fin } 1) \ \mathbb{C}))$ .

**Proof.** The goal is simplified using the definition of the effect expectation.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/EffectFamily.lean](#)

```
theorem effectPrecompose_born_eq_trace {A : Nat}
  (? : Superoperator 1 A)
  (E : Matrix (Fin A) (Fin A) ?)
  (hE : E.PosSemidef) (hEle : E <= 1) :
  bornScalar (effectPrecompose ? (ofEffect E hE hEle)) =
    Matrix.trace (E * ?.cp.applyMat (1 : Matrix (Fin 1) (Fin 1) ?)) := by
  simp [effectExpectation] using effectExpectation_unit ? E hE hEle
```

#### 4.4.1109 Specialization: the existence gate applies to every unit-image pairing

**Statement.** Specialization: the existence gate applies to every unit-image pairing. Formally:  $\exists \Psi : \text{Superoperator } 1 \ A, \forall e : \text{Superoperator } A \ 1, \text{effectPrecompose } \Psi \ e = \text{effectPrecompose } \Phi \ e$ .

**Proof.** This is an instance of the existence half of the analytic gate at fiber  $n = 1$ , applied to the definition of the action on a matrix and the positive semidefiniteness of the action on a matrix.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/EffectFamily.lean](#)

```
theorem exists_superoperator_of_effect_pairing_unit {A : Nat}
  (? : Superoperator 1 A) :
  exists ? : Superoperator 1 A,
    forall e : Superoperator A 1, effectPrecompose ? e = effectPrecompose ? e :=
  exists_superoperator_of_effect_pairing (effectPrecompose ?)
  (?.cp.applyMat (1 : Matrix (Fin 1) (Fin 1) ?))
  (CPMap.applyMat_posSemidef ?.cp Matrix.PosSemidef.one)
  (by
    have h :=
      ?.trace_nonincreasing (1 : Matrix (Fin 1) (Fin 1) ?)
      Matrix.PosSemidef.one
    have : (Matrix.trace (1 : Matrix (Fin 1) (Fin 1) ?)).re = 1 := by
      simp [Matrix.trace_one]
    simp [this] using h)
  (fun E hE hEle => effectPrecompose_born_eq_trace ? E hE hEle)
```

#### 4.4.1110 On the unit image, the Born quadratic form recovers the state quadratic form $\mathbf{v} \mapsto \langle \mathbf{v} | \Phi(\mathbf{I}) | \mathbf{v} \rangle$

**Statement.** On the unit image, the Born quadratic form recovers the state quadratic form  $\mathbf{v} \mapsto \langle \mathbf{v} | \Phi(\mathbf{I}) | \mathbf{v} \rangle$ . Formally:  $\text{effectPairingQuad} (\text{effectPrecompose } \Phi) \ v = \text{star } v \cdot (\Phi.\text{cp.applyMat } (1 : \text{Matrix } (\text{Fin } 1) (\text{Fin } 1) \ \mathbb{C})) \ *_{\mathbf{v}} \ v$ .

**Proof.** Both sides are compared pointwise (by extensionality). The claim follows from a chain of equalities (or inequalities). The argument splits on the relevant condition. The key step rewrites with the definition of the quadratic effect pairing, the fact that trace against a rank-one equals the quadratic form, the definition of the normalize vector and standard identities for complex numbers.

## Lean 4 source QLambda/Domain/Presheaf/RepresentableBipolar/EffectFamily.lean

```

theorem effectPairingQuad_unit {A : Nat}
  (? : Superoperator 1 A) (v : Fin A → ?) :
  effectPairingQuad (effectPrecompose ?) v =
    star v ?? (? .cp.applyMat (1 : Matrix (Fin 1) (Fin 1) ?)) *? v := by
let ? := ? .cp.applyMat (1 : Matrix (Fin 1) (Fin 1) ?)
let nrm := star v ?? v
have him : nrm.im = 0 := (star_dotProduct_self_nonneg_real v).2
simp only [effectPairingQuad]
split_ifs with h
* have : v = 0 := (dotProduct_star_self_eq_zero).1 h
  simp [this]
* have hw := normalizeVec_norm v h
  have hborn :=
    effectPrecompose_born_eq_trace ?
      (Matrix.vecMulVec (normalizeVec v h) (star (normalizeVec v h)))
      (Matrix.posSemidef_vecMulVec_self_star _)
      (vecMulVec_unit_le_one _ hw)
  rw [hborn, trace_vecMulVec_mul]
  set w := normalizeVec v h
  set s : ? := (Real.sqrt nrm.re : ?)
  have hvw : v = s * w := by
    simp only [w, normalizeVec]
  ext i
  change v i = s * (s-1 * v i)
  have hs_ne : s ≠ 0 := by
    intro hs0
    have hre := (star_dotProduct_self_nonneg_real v).1
    have hre0 : nrm.re = 0 :=
      (Real.sqrt_eq_zero hre).1 (by
        simp [s, Complex.ofReal_re] using congrArg Complex.re hs0)
    exact h (Complex.ext hre0 him)
  field_simp [hs_ne]
  have hstar_s : star s = s := by
    simp [s, Complex.conj_ofReal]
  have hnorm : nrm = s * s := by
    apply Complex.ext
    * have hims : s.im = 0 := by simp [s]
    have : nrm.re = s.re * s.re := by
      simp [s, Complex.ofReal_re] using
        (Real.mul_self_sqrt (star_dotProduct_self_nonneg_real v).1).symm
    simp [Complex.mul_re, hims] using this
    * simp [Complex.mul_im, s] using him
  calc
    nrm * (star w ?? ? *? w) =
      star s * s * (star w ?? ? *? w) := by rw [hnorm, hstar_s]
    _ = star (s * w) ?? ? *? (s * w) := (quad_smul ? s w).symm
    _ = star v ?? ? *? v := by rw [← hvw]

```

### 4.4.1111 Precomposition of an effect $A \rightarrow 1$ against a map $n \rightarrow A$

**Definition.** Precomposition of an effect  $A \rightarrow 1$  against a map  $n \rightarrow A$ .

**Construction.** Defined to be the composite of  $e$  after  $\Phi$ .

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean`

```
noncomputable def effectPrecompose {n A : Nat}
  (? : Superoperator n A) (e : Superoperator A 1) : Superoperator n 1 :=
  Superoperator.comp e ?
```

#### 4.4.1112 Pointwise formula for the precomposition with an effect

**Statement.** For natural numbers  $n, A$ , superoperators  $\Phi, e$ : the precomposition with an effect of  $\Phi$  and  $e$  equals the composite of  $e$  after  $\Phi$ .

**Proof.** By definition. Unfolding the precomposition with an effect turns the left-hand side, the precomposition with an effect of  $\Phi$  and  $e$ , into the right-hand side, the composite of  $e$  after  $\Phi$ ; the two sides are the same term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean`

```
theorem effectPrecompose_apply {n A : Nat}
  (? : Superoperator n A) (e : Superoperator A 1) :
  effectPrecompose ? e = Superoperator.comp e ? :=
  rfl
```

#### 4.4.1113 Build the TNI effect $A \rightarrow 1$ with prescribed input effect $E \leq I$

**Definition.** Build the TNI effect  $A \rightarrow 1$  with prescribed input effect  $E \leq I$ . Choi indices are arranged so that effect recovers  $E$  exactly:  $\text{effect } i j = \sum_a \text{choi } (a, j) (a, i) = E i j$ .

**Construction.** Constructed interactively; both sides are compared pointwise (by extensionality). The goal is simplified using the definition of the effect, the definition of the classical, standard identities for finite sums and the usual algebraic identities.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean`

```
noncomputable def ofEffect {A : Nat}
  (E : Matrix (Fin A) (Fin A) ?)
  (hpsd : E.PosSemidef) (hle : E <= 1) : Superoperator A 1 := by
  let C : Matrix (Fin 1 x Fin A) (Fin 1 x Fin A) ? := fun p q => E q.2 p.2
  have hC : C.PosSemidef := by
    have hT : E?.PosSemidef := hpsd.transpose
    exact hT.submatrix (Prod.snd : Fin 1 x Fin A -> Fin A)
  refine
    <{ choi := C, choi_pos := hC },
    (traceNonincreasing_iff_effect_le_one _).mpr ?_>
  -- `effect i j = ?_{a:Fin 1} E i j = E i j`.
  have hE : (<C, hC> : CMap A 1).effect = E := by
    ext i j
    simp only [CMap.effect, C, Finset.sum_const, Finset.card_fin,
      nsmul_eq_mul, Nat.cast_one, one_mul]
    simp [hE] using hle
```

#### 4.4.1114 Map determined by an effect of the effect

**Statement.** For a natural number  $A$ , a matrix  $E$ : if  $E$  is positive semidefinite and  $E \leq 1$ , then  $(\text{ofEffect } E \text{ hpsd hle}).\text{cp.effect} = E$ .

**Proof.** Both sides are compared pointwise (by extensionality). The goal is simplified using the definition of the map determined by an effect, the definition of the effect, standard identities for finite sums and the usual algebraic identities.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean](#)

```
theorem ofEffect_effect {A : Nat}
  (E : Matrix (Fin A) (Fin A) ?)
  (hpsd : E.PosSemidef) (hle : E <= 1) :
  (ofEffect E hpsd hle).cp.effect = E := by
  simp only [ofEffect]
  ext i j
  simp only [CPMap.effect, Finset.sum_const, Finset.card_fin,
    nsmul_eq_mul, Nat.cast_one, one_mul]
```

#### 4.4.1115 Trace of the map determined by an effect of the action on a matrix

**Statement.** For a natural number  $A$ , matrixes  $E, \rho$ : if  $E$  is positive semidefinite and  $E \leq 1$ , then the trace of  $(\text{ofEffect } E \text{ hpsd hle}).\text{cp.applyMat } \rho$  equals the trace of the product of  $E$  and  $\rho$ .

**Proof.** The key step rewrites with the fact that trace of an intrinsic CP action is pairing with its input effect and the map determined by an effect of the effect.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean](#)

```
theorem ofEffect_applyMat_trace {A : Nat}
  (E : Matrix (Fin A) (Fin A) ?)
  (hpsd : E.PosSemidef) (hle : E <= 1)
  (? : Matrix (Fin A) (Fin A) ?) :
  Matrix.trace ((ofEffect E hpsd hle).cp.applyMat ?) =
  Matrix.trace (E * ?) := by
  rw [CPMap.trace_applyMat_eq_effect, ofEffect_effect]
```

#### 4.4.1116 Formula for the precomposition with an effect of the trace

**Statement.** Effects separate applyMat/trace pairings: if  $e \circ \Phi = e \circ \Psi$  for every effect, then  $\text{Tr}(E \cdot \Phi(\rho)) = \text{Tr}(E \cdot \Psi(\rho))$  for every Loewner effect  $E \leq I$ . Formally:  $\text{tr}(E * \Phi.\text{cp.applyMat } \rho) = \text{tr}(E * \Psi.\text{cp.applyMat } \rho)$ .

**Proof.** The goal is simplified using the definition of the precomposition with an effect, the underlying completely positive map of a composite for superoperators, the action on a matrix of a composition and the trace of the map determined by an effect of the action on a matrix.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean](#)

```

theorem effectPrecompose_trace_eq {n A : Nat}
  {? ? : Superoperator n A}
  (h : forall e : Superoperator A 1, effectPrecompose ? e = effectPrecompose ? e)
  (E : Matrix (Fin A) (Fin A) ?)
  (hpsd : E.PosSemidef) (hle : E <= 1)
  (? : Matrix (Fin n) (Fin n) ?) :
  Matrix.trace (E * ?.cp.applyMat ?) =
    Matrix.trace (E * ?.cp.applyMat ?) := by
  have he :=
    congrArg
      (fun f : Superoperator n 1 => Matrix.trace (f.cp.applyMat ?))
      (h (ofEffect E hpsd hle))
  have h? :
    Matrix.trace
      ((effectPrecompose ? (ofEffect E hpsd hle)).cp.applyMat ?) =
        Matrix.trace (E * ?.cp.applyMat ?) := by
    simp only [effectPrecompose, Superoperator.cp_comp, CPMMap.applyMat_comp]
    exact ofEffect_applyMat_trace E hpsd hle _
  have h? :
    Matrix.trace
      ((effectPrecompose ? (ofEffect E hpsd hle)).cp.applyMat ?) =
        Matrix.trace (E * ?.cp.applyMat ?) := by
    simp only [effectPrecompose, Superoperator.cp_comp, CPMMap.applyMat_comp]
    exact ofEffect_applyMat_trace E hpsd hle _
    exact (h?.symm.trans he).trans h?

/-! ## Effect-precompose injectivity -/

```

#### 4.4.1117 Trace against a rank-one equals the quadratic form

**Statement.** Trace against a rank-one equals the quadratic form. Formally:  $\text{tr } (\text{Matrix.vecMulVec } v \text{ (star } v) * M) = \text{star } v \cdot M \cdot v$ .

**Proof.** The key step rewrites with interchange of finite sums, distributivity of multiplication over finite sums, the sum of a congruence and the fact that observational equality is transitive.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean](#)

```

theorem trace_vecMulVec_mul {A : Nat}
  (M : Matrix (Fin A) (Fin A) ?) (v : Fin A -> ?) :
  Matrix.trace (Matrix.vecMulVec v (star v) * M) =
    star v ?? M * v := by
  change (? i, ? j, (v i * star (v j)) * M j i) =
    ? i, star (v i) * ? j, M i j * v j
  have h1 :
    (? i, ? j, (v i * star (v j)) * M j i) =
      ? i, ? j, v i * star (v j) * M j i := by
    refine Finset.sum_congr rfl fun _ _ => Finset.sum_congr rfl fun _ _ => by ring
  have h2 :
    (? i, ? j, v i * star (v j) * M j i) =
      ? j, ? i, star (v j) * (M j i * v i) := by
    rw [Finset.sum_comm]
    refine Finset.sum_congr rfl fun _ _ => Finset.sum_congr rfl fun _ _ => by ring
  have h3 :

```

```

    (? j, ? i, star (v j) * (M j i * v i)) =
      ? j, star (v j) * ? i, M j i * v i := by
    refine Finset.sum_congr rfl fun j _ => ?_
    simp only [ <- Finset.mul_sum ]
    exact h1.trans (h2.trans h3)

```

#### 4.4.1118 Unit rank-one is idempotent

**Statement.** Unit rank-one is idempotent. Formally:  $\text{Matrix.vecMulVec } v \text{ (star } v) * \text{Matrix.vecMulVec } v \text{ (star } v) = \text{Matrix.vecMulVec } v \text{ (star } v)$ .

**Proof.** Both sides are compared pointwise (by extensionality). The claim follows from a chain of equalities (or inequalities). The key step rewrites with standard identities for matrices, distributivity of multiplication over finite sums, the usual algebraic identities and the sum of a congruence.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean](#)

```

theorem vecMulVec_unit_mul_self {α : Type*} [Fintype α]
  (v : α → ℝ) (hv : star v ==> v == 1) :
  Matrix.vecMulVec v (star v) * Matrix.vecMulVec v (star v) =
    Matrix.vecMulVec v (star v) := by
  ext i j
  simp only [Matrix.mul_apply, Matrix.vecMulVec_apply]
  calc
    ? k, (v i * star (v k)) * (v k * star (v j))
      = ? k, (v i * star (v j)) * (star (v k) * v k) := by
      refine Finset.sum_congr rfl fun k _ => by ring
    _ = (v i * star (v j)) * ? k, star (v k) * v k := by
      rw [ <- Finset.mul_sum ]
    _ = v i * star (v j) := by
      have hsum : (? k, star (v k) * v k) = (1 : ℝ) := by
        simpa [dotProduct] using hv
      rw [hsum, mul_one]

```

#### 4.4.1119 Unit rank-one $|v\rangle\langle v|$ is an orthogonal projector, hence Loewner-below $I$

**Statement.** Unit rank-one  $|v\rangle\langle v|$  is an orthogonal projector, hence Loewner-below  $I$ . Formally:  $\text{Matrix.vecMulVec } v \text{ (star } v) \leq 1$ .

**Proof.** The claim follows from a chain of equalities (or inequalities). The key step rewrites with the characterization of the order for subnormalized density matrices, standard identities for matrices and the fact that observational equality is symmetric.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean](#)

```

theorem vecMulVec_unit_le_one {α : Type*} [Fintype α] [DecidableEq α]
  (v : α → ℝ) (hv : star v ==> v == 1) :
  Matrix.vecMulVec v (star v) <= (1 : Matrix α α) := by
  set P := Matrix.vecMulVec v (star v)
  have hPherm : P.IsHermitian :=
    (Matrix.posSemidef_vecMulVec_self_star v).isHermitian

```

```

have hPidem : P * P = P := vecMulVec_unit_mul_self v hv
have hproj : (1 - P) * (1 - P) = 1 - P := by
  calc
    (1 - P) * (1 - P) = 1 - P - P + P * P := by noncomm_ring
    _ = 1 - P - P + P := by rw [hPidem]
    _ = 1 - P := by abel
have hhermIP : (1 - P).IsHermitian :=
  Matrix.IsHermitian.sub Matrix.isHermitian_one hPherm
have hQQ : (1 - P)? * (1 - P) = 1 - P := by
  rw [hhermIP.eq, hproj]
rw [Matrix.le_iff]
refine Matrix.PosSemidef.of_dotProduct_mulVec_nonneg hhermIP fun x => ?_
have key :
  star x ?? ((1 - P)? * (1 - P)) *? x =
  star ((1 - P) *? x) ?? ((1 - P) *? x) := by
  rw [ <- mulVec_mulVec, dotProduct_mulVec, vecMul_conjTranspose, star_star]
have : star x ?? (1 - P) *? x =
  star ((1 - P) *? x) ?? ((1 - P) *? x) := by
  convert key
  exact hQQ.symm
rw [this]
exact dotProduct_star_self_nonneg _

```

#### 4.4.1120 Over $\mathbb{C}$ , a matrix is zero iff every quadratic form vanishes

**Statement.** Over  $\mathbb{C}$ , a matrix is zero iff every quadratic form vanishes. Uses Mathlib's `inner_map_self_eq_zero` on `toEuclideanLin`. Formally:  $M = 0$ .

**Proof.** The key step rewrites with the usual algebraic identities, commutativity of multiplication and the sum of a congruence.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean`

```

theorem matrix_eq_zero_of_forall_quad {A : Nat}
  (M : Matrix (Fin A) (Fin A) ?)
  (h : forall v : Fin A -> ?, star v ?? M *? v = 0) : M = 0 := by
  classical
  have hT : forall x : EuclideanSpace ? (Fin A), ?M.toEuclideanLin x, x?_? = 0 := by
    intro x
    set v := ofLp x
    have hq : star v ?? M *? v = 0 := h v
    have hinner :
      ?M.toEuclideanLin x, x?_? = star (star v ?? M *? v) := by
      rw [PiLp.inner_apply]
      simp only [RCLike.inner_apply, ofLp_toLpLin]
      change (? i, v i * star ((M *? v) i)) =
        star (? i, star (v i) * (M *? v) i)
      rw [star_sum]
      refine Finset.sum_congr rfl fun i _ => ?_
      simp [star_mul, mul_comm]
    simp [hinner, hq]
  exact (LinearEquiv.map_eq_zero_iff Matrix.toEuclideanLin).1
    ((inner_map_self_eq_zero _).1 hT)

```



#### 4.4.1121 Adjoint of the dot product of a scalar multiple of itself

**Statement.** For a complex number  $c$ : the adjoint of  $c \cdot v, \cdot_v, c \cdot v$  equals  $\text{star } c * c * (\text{star } v \cdot v)$ .

**Proof.** The claim follows from a chain of equalities (or inequalities). The key step rewrites with the usual algebraic identities, distributivity of multiplication over finite sums and the sum of a congruence.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean`

```
theorem star_dotProduct_smul_self {? : Type*} [Fintype ?]
  (c : ?) (v : ? -> ?) :
  star (c * v) ?? (c * v) = star c * c * (star v ?? v) := by
  simp only [dotProduct, Pi.smul_apply, smul_eq_mul]
  calc
    ? i, star (c * v i) * (c * v i)
      = ? i, (star (v i) * star c) * (c * v i) := by
        refine Finset.sum_congr rfl fun i _ => ?_
        rw [star_mul]
    _ = ? i, (star c * c) * (star (v i) * v i) := by
        refine Finset.sum_congr rfl fun i _ => by ring
    _ = (star c * c) * ? i, star (v i) * v i := by
        rw [ <- Finset.mul_sum]
```

#### 4.4.1122 Quadratic form scales by $|c|^2$

**Statement.** Quadratic form scales by  $|c|^2$ . Formally:  $\text{star } (c \cdot v) \cdot M *_{\cdot_v} (c \cdot v) = \text{star } c * c * (\text{star } v \cdot M *_{\cdot_v} v)$ .

**Proof.** Both sides are compared pointwise (by extensionality). The claim follows from a chain of equalities (or inequalities). The key step rewrites with the usual algebraic identities, distributivity of multiplication over finite sums and the sum of a congruence.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean`

```
theorem quad_smul {A : Nat}
  (M : Matrix (Fin A) (Fin A) ?) (c : ?) (v : Fin A -> ?) :
  star (c * v) ?? M *? (c * v) =
  star c * c * (star v ?? M *? v) := by
  have hmul : M *? (c * v) = c * (M *? v) := by
    ext i
    simp [mulVec, Pi.smul_apply]
  simp only [hmul, smul_eq_mul, dotProduct, Pi.smul_apply]
  calc
    ? i, star (c * v i) * (c * (M *? v) i)
      = ? i, (star (v i) * star c) * (c * (M *? v) i) := by
        refine Finset.sum_congr rfl fun i _ => ?_
        rw [star_mul]
    _ = ? i, (star c * c) * (star (v i) * (M *? v) i) := by
        refine Finset.sum_congr rfl fun i _ => by ring
    _ = (star c * c) * ? i, star (v i) * (M *? v) i := by
        rw [ <- Finset.mul_sum]
```

#### 4.4.1123 Loewner effects separate matrices via rank-one unit probes

**Statement.** Loewner effects separate matrices via rank-one unit probes. Formally:  $X = Y$ .

**Proof.** Both sides are compared pointwise (by extensionality). The claim follows from a chain of equalities (or inequalities). The argument splits on the relevant condition. The key step rewrites with standard identities for complex numbers and the adjoint of the dot product of a scalar multiple of itself. The remaining identity is a polynomial identity in a commutative ring.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean`

```
theorem matrix_eq_of_forall_effect_trace {A : Nat}
  {X Y : Matrix (Fin A) (Fin A) ?}
  (h : forall E : Matrix (Fin A) (Fin A) ?,
    E.PosSemidef -> E <= 1 -> Matrix.trace (E * X) = Matrix.trace (E * Y)) :
  X = Y := by
  refine sub_eq_zero.mp (matrix_eq_zero_of_forall_quad (X - Y) fun v => ?_)
  by_cases hv0 : star v ?? v = 0
  * have : v = 0 := (dotProduct_star_self_eq_zero).1 hv0
    simp [this]
  * have hnn : (0 : ?) <= star v ?? v := dotProduct_star_self_nonneg v
    have hre_nonneg : 0 <= (star v ?? v).re := (Complex.nonneg_iff.mp hnn).1
    have him0 : (star v ?? v).im = 0 := by
      simpa using (Complex.nonneg_iff.mp hnn).2.symm
    have hre_pos : 0 < (star v ?? v).re := by
      refine lt_of_le_of_ne hre_nonneg fun hre0 => ?_
      exact hv0 (Complex.ext (Eq.symm hre0) him0)
    let s : ? := Real.sqrt (star v ?? v).re
    have hs_pos : 0 < s := Real.sqrt_pos.mpr hre_pos
    have hs_ne : (s : ?) != 0 := Complex.ofReal_ne_zero.mpr (ne_of_gt hs_pos)
    have hstar_s : star (s : ?) = (s : ?) := by
      rw [Complex.star_def, Complex.conj_ofReal]
    have hstar_inv : star ((s : ?)^-1) = (s : ?)^-1 := by
      rw [star_inv_0, hstar_s]
    have hv_norm : star v ?? v = (s : ?) * (s : ?) := by
      apply Complex.ext
      * have : (star v ?? v).re = s * s := by
          simpa [s] using (Real.mul_self_sqrt hre_nonneg).symm
          simpa [Complex.mul_re, Complex.ofReal_re] using this
      * simp [Complex.mul_im, him0]
    let w : Fin A -> ? := ((s : ?)^-1) * v
    have hw1 : star w ?? w = 1 := by
      rw [star_dotProduct_smul_self, hv_norm, hstar_inv]
      field_simp [hs_ne]
    have htr :=
      h (Matrix.vecMulVec w (star w))
      (Matrix.posSemidef_vecMulVec_self_star w)
      (vecMulVec_unit_le_one w hw1)
    have hwquad : star w ?? (X - Y) *? w = 0 := by
      rw [← trace_vecMulVec_mul, Matrix.mul_sub, Matrix.trace_sub, htr, sub_self]
    have hvw : v = (s : ?) * w := by
      simp only [w]
      ext i
      change v i = (s : ?) * ((s : ?)^-1 * v i)
      rw [← mul_assoc, mul_inv_cancel_0 hs_ne, one_mul]
```

```

calc
  star v ?? (X - Y) *? v =
    star ((s : ?) * w) ?? (X - Y) *? ((s : ?) * w) := by rw [hvw]
  _ = star (s : ?) * (s : ?) * (star w ?? (X - Y) *? w) :=
    quad_smul _ _ _
  _ = (s : ?) * (s : ?) * 0 := by rw [hstar_s, hwquad]
  _ = 0 := by ring

```

#### 4.4.1124 Effects separate superoperators: $\forall e, e \circ \Phi = e \circ \Psi$ implies $\Phi = \Psi$

**Statement.** Effects separate superoperators:  $\forall e, e \circ \Phi = e \circ \Psi$  implies  $\Phi = \Psi$ . Formally:  $\Phi = \Psi$ .

**Proof.** Both sides are compared pointwise (by extensionality). It follows from the extensionality for superoperators, the pointwise formula for the extensionality, the loewner effects separate matrices via rank-one unit probes and the formula for the precomposition with an effect of the trace.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean](#)

```

theorem effectPrecompose_injective {n A : Nat}
  {? ? : Superoperator n A}
  (h : forall e : Superoperator A 1, effectPrecompose ? e = effectPrecompose ? e) :
  ? = ? := by
  apply Superoperator.ext
  apply CPMMap.ext_apply
  intro ?
  refine matrix_eq_of_forall_effect_trace ?_
  intro E hpsd hle
  exact effectPrecompose_trace_eq h E hpsd hle ?

/-! ## Closed-adjunction transport of the first dual -/

```

#### 4.4.1125 Closed-adjunction + Yoneda transport: $\text{Hom}(\mathbf{y}(n), \neg \mathbf{y}(A)) \simeq \text{Superoperator}(n * A) 1$

**Definition.** Closed-adjunction + Yoneda transport:  $\text{Hom}(\mathbf{y}(n), \neg \mathbf{y}(A)) \simeq \text{Superoperator}(n * A) 1$ . This is the fiber identification used when reconstructing maps out of  $\neg \mathbf{y}(A)$  by evaluating against effects. The carrier  $(\neg \mathbf{y}(A)).\text{obj } n.\text{Carrier}$  itself is the bilinear module  $\text{Bilinear}(\mathbf{y}(n), \neg \mathbf{y}(A), I)$ , not definitionally  $\text{Superoperator}(n * A) 1$ .

**Construction.** Defined by an explicit formula built from the currying equivalence, the representable module, the Day tensor unit and the Day tensor product representable equivalence.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean](#)

```

noncomputable def doubleDualFiberEquiv (A n : Nat) :
  Hom (representable n) (DayNegation.neg (representable A)) ?
  Superoperator (n * A) 1 :=
  ((DayInternalHom.curryEquiv
    (representable n) (representable A) dayTensorUnit).symm.trans
    (dayTensorRepresentableEquiv n A dayTensorUnit).symm).trans
    (yonedaEquiv dayTensorUnit (n * A))

```

#### 4.4.1126 Pointwise formula for the double dual fiber equivalence

**Statement.** For natural numbers  $A, n$ , a module morphism  $\eta$ : the double dual fiber equivalence of  $A, n$ ,  $\eta$  equals an explicit expression in the Yoneda equivalence, the Day tensor unit, the Day tensor product representable equivalence and the uncurrying.

**Proof.** By definition. Unfolding the double dual fiber equivalence turns the left-hand side, the double dual fiber equivalence of  $A, n, \eta$ , into the right-hand side, an explicit expression in the Yoneda equivalence, the Day tensor unit, the Day tensor product representable equivalence and the uncurrying; the two sides are the same term.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean`

```
theorem doubleDualFiberEquiv_apply (A n : Nat)
  (? : Hom (representable n) (DayNegation.neg (representable A))) :
  doubleDualFiberEquiv A n ? =
  yonedaEquiv dayTensorUnit (n * A)
    ((dayTensorRepresentableEquiv n A dayTensorUnit).symm
      (DayInternalHom.uncurry ?)) :=
  rfl
```

#### 4.4.1127 The same transport factors through the existing first-dual fiber equivalence after Yoneda

**Statement.** The same transport factors through the existing first-dual fiber equivalence after Yoneda.

**Proof.** The goal is simplified using the definition of the double dual fiber equivalence, the definition of the Day negation representable fiber equivalence and the definition of the Day internal morphism representable fiber equivalence.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean`

```
theorem doubleDualFiberEquiv_eq_fiberEquiv (A n : Nat)
  (? : Hom (representable n) (DayNegation.neg (representable A))) :
  doubleDualFiberEquiv A n ? =
  dayNegationRepresentableFiberEquiv A n
    (yonedaEquiv (DayNegation.neg (representable A)) n ?) := by
  simp only [doubleDualFiberEquiv,
    dayNegationRepresentableFiberEquiv,
    dayInternalHomRepresentableFiberEquiv]
  rfl

/-- ## Concrete double-dual unit reshape -/
```

#### 4.4.1128 Unfolded action of unit on a representable

**Statement.** Unfolded action of `DayNegation.unit` on a representable.

**Proof.** The key step rewrites with the definition of the unit, the definition of the currying and the definition of the unit bilinear map.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean`

```

theorem representable_unit_app_app {A n p q : Nat}
  (? : Superoperator n A) (r : Superoperator p n)
  (b : ((DayNegation.neg (representable A)).obj q).Carrier) :
  ((DayNegation.unit (representable A)).app n ?).app r b =
    Superoperator.comp
      (b.app (Superoperator.identity q) (Superoperator.comp ? r))
      (Superoperator.tensorSwap p q) := by
simp only [DayNegation.unit, DayInternalHom.curry, DayNegation.unitBilinear]
change
  Superoperator.comp
    (b.app (Superoperator.identity q)
      ((representable A).act ? r))
    (Superoperator.tensorSwap p q) =
  Superoperator.comp
    (b.app (Superoperator.identity q) (Superoperator.comp ? r))
    (Superoperator.tensorSwap p q)
rw (config := { transparency := .default }) [representable_act]

```

#### 4.4.1129 Transport a first-dual fiber element to its bilinear representative

**Definition.** Transport a first-dual fiber element to its bilinear representative.

**Construction.** Defined to be  $(\text{dayInternalHomRepresentableIso } A \text{ dayTensorUnit}).\text{inv.app } q \chi$ .

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean](#)

```

noncomputable def dualFiberBilinear (A q : Nat)
  (chi : Superoperator (q * A) 1) :
  ((DayNegation.neg (representable A)).obj q).Carrier :=
  (dayInternalHomRepresentableIso A dayTensorUnit).inv.app q chi

```

#### 4.4.1130 Components of the dual fiber bilinear map

**Statement.** For natural numbers  $A, q, p, q'$ , superoperators  $\chi, r, s$ :  $(\text{dualFiberBilinear } A \ q \ \chi) . \text{app } r \ s$  equals the composite of  $\chi$  after the tensor product of  $r$  and  $s$ .

**Proof.** By definition: the left-hand side,  $(\text{dualFiberBilinear } A \ q \ \chi) . \text{app } r \ s$ , and the right-hand side, the composite of  $\chi$  after the tensor product of  $r$  and  $s$ , unfold to the same term.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean](#)

```

theorem dualFiberBilinear_app {A q p q' : Nat}
  (chi : Superoperator (q * A) 1)
  (r : Superoperator p q) (s : Superoperator q' A) :
  (dualFiberBilinear A q chi).app r s =
    Superoperator.comp chi (Superoperator.tensor r s) :=
  rfl

```

#### 4.4.1131 Unit fiber reshape. Evaluating the double-dual unit at $\Phi$ against a dual-fiber probe $\chi$

**Statement. Unit fiber reshape.** Evaluating the double-dual unit at  $\Phi$  against a dual-fiber probe  $\chi : \text{Superoperator } (q * A) \ 1$  yields  $\chi \circ \text{swap\_}\{A, q\} \circ (\Phi \otimes \text{id\_}q),.$

**Proof.** The claim follows from a chain of equalities (or inequalities). The key step rewrites with the unfolded action of unit on a representable, the composition of the identity for superoperators and the components of the dual fiber bilinear map.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean`

```
theorem unit_fiber_eq {A n q : Nat}
  (? : Superoperator n A) (chi : Superoperator (q * A) 1) :
  ((DayNegation.unit (representable A)).app n ?).app
    (Superoperator.identity n) (dualFiberBilinear A q chi) =
    Superoperator.comp chi
      (Superoperator.comp
        (Superoperator.tensorSwap A q)
        (Superoperator.tensor ? (Superoperator.identity q))) := by
  rw [representable_unit_app_app, Superoperator.comp_identity,
    dualFiberBilinear_app]
  have hswap :=
    Superoperator.tensorSwap_naturality ? (Superoperator.identity q)
  calc
    Superoperator.comp
      (Superoperator.comp chi
        (Superoperator.tensor (Superoperator.identity q) ?))
      (Superoperator.tensorSwap n q) =
    Superoperator.comp chi
      (Superoperator.comp
        (Superoperator.comp
          (Superoperator.tensor (Superoperator.identity q) ?)
          (Superoperator.tensorSwap n q)) :=
        (Superoperator.comp_assoc _ _ _).symm
      _ = Superoperator.comp chi
        (Superoperator.comp
          (Superoperator.tensorSwap A q)
          (Superoperator.tensor ? (Superoperator.identity q))) := by
      rw [ <- hswap]
```

#### 4.4.1132 Right-associated form of unit fiber equality

**Statement.** Right-associated form of `unit_fiber_eq`.

**Proof.** The key step rewrites with the **Unit fiber reshape**. Evaluating the double-dual unit at  $\Phi$  against a dual-fiber probe  $\chi$  and the fact that composition for superoperators is associative.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean`

```
theorem unit_fiber_eq' {A n q : Nat}
  (? : Superoperator n A) (chi : Superoperator (q * A) 1) :
  ((DayNegation.unit (representable A)).app n ?).app
    (Superoperator.identity n) (dualFiberBilinear A q chi) =
    Superoperator.comp
```

```

(Superoperator.comp chi (Superoperator.tensorSwap A q))
(Superoperator.tensor ? (Superoperator.identity q)) := by
rw [unit_fiber_eq, Superoperator.comp_assoc]

```

#### 4.4.1133 Evaluating the unit against an arbitrary dual bilinear recovers $b(\text{id}, \Phi)$ after the Day braiding

**Statement.** Evaluating the unit against an arbitrary dual bilinear recovers  $b(\text{id}, \Phi)$  after the Day braiding.

**Proof.** The goal is simplified using the composition of the identity for superoperators.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean](#)

```

theorem unit_eval_bilinear {A n q : Nat}
  (? : Superoperator n A)
  (b : ((DayNegation.neg (representable A)).obj q).Carrier) :
  ((DayNegation.unit (representable A)).app n ?).app
    (Superoperator.identity n) b =
  Superoperator.comp
    (b.app (Superoperator.identity q) ?)
    (Superoperator.tensorSwap n q) := by
simpa [Superoperator.comp_identity] using
  representable_unit_app_app ? (Superoperator.identity n) b

```

#### 4.4.1134 Composition on the right by tensor swap is injective

**Statement.** Composition on the right by `tensorSwap` is injective. Formally: Injective fun  $\chi : \text{Superoperator } (p * q) \rightarrow 1 \Rightarrow \text{Superoperator.comp } \chi \text{ (Superoperator.tensorSwap } q \text{ p)}$ .

**Proof.** The claim follows from a chain of equalities (or inequalities). The goal is simplified using the fact that the tensor swap is an involution.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean](#)

```

theorem comp_tensorSwap_injective {p q : Nat} :
  Function.Injective fun chi : Superoperator (p * q) → 1 =>
    Superoperator.comp chi (Superoperator.tensorSwap q p) := by
intro chi_1 chi_2 hcomp
have h :=
  congrArg
    (fun ? : Superoperator (q * p) → 1 =>
      Superoperator.comp ? (Superoperator.tensorSwap p q)) hcomp
-- `chi comp swap comp swap = chi`.
calc
  chi_1 = Superoperator.comp chi_1
    (Superoperator.comp (Superoperator.tensorSwap q p)
      (Superoperator.tensorSwap p q)) := by
    simp [Superoperator.tensorSwap_involutive]
  _ = Superoperator.comp

```

```

      (Superoperator.comp chi_1 (Superoperator.tensorSwap q p))
      (Superoperator.tensorSwap p q) := Superoperator.comp_assoc _ _ _
_ = Superoperator.comp
      (Superoperator.comp chi_2 (Superoperator.tensorSwap q p))
      (Superoperator.tensorSwap p q) := h
_ = Superoperator.comp chi_2
      (Superoperator.comp (Superoperator.tensorSwap q p)
      (Superoperator.tensorSwap p q)) :=
      (Superoperator.comp_assoc _ _ _).symm
_ = chi_2 := by simp [Superoperator.tensorSwap_involutive]

/-! ## Fiberwise injectivity of the representable unit -/

```

#### 4.4.1135 From equality of units, dual bilinears agree on $\Phi$ and $\Psi$

**Statement.** From equality of units, dual bilinears agree on  $\Phi$  and  $\Psi$ . Formally:  $b.app \text{ (Superoperator.identity } q) \Phi = b.app \text{ (Superoperator.identity } q) \Psi$ .

**Proof.** The key step rewrites with the evaluating the unit against an arbitrary dual bilinear recovers  $b(id, \Phi)$  after the Day braiding and the fact that composition on the right by tensor swap is injective.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean](#)

```

theorem unit_eq_imp_bilinear_app {A n q : Nat}
  {? ? : Superoperator n A}
  (h : (DayNegation.unit (representable A)).app n ? =
    (DayNegation.unit (representable A)).app n ?)
  (b : ((DayNegation.neg (representable A)).obj q).Carrier) :
  b.app (Superoperator.identity q) ? =
  b.app (Superoperator.identity q) ? := by
have hval :=
  congrArg
    (fun F :
      ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier =>
        F.app (Superoperator.identity n) b) h
rw [unit_eval_bilinear, unit_eval_bilinear] at hval
exact comp_tensorSwap_injective hval

```

#### 4.4.1136 Dual fiber at $q = 1$ recovers ordinary effect precomposition (up to the left unitor $1 \star A \simeq A$ )

**Statement.** Dual fiber at  $q = 1$  recovers ordinary effect precomposition (up to the left unitor  $1 \star A \simeq A$ ).

**Proof.** The claim follows from a chain of equalities (or inequalities). The key step rewrites with the components of the dual fiber bilinear map, the definition of the precomposition with an effect, the fact that composition for superoperators is associative and the naturality of the tensor left unitor.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean](#)

```

theorem dualFiberBilinear_one_app {A n : Nat}
  (e : Superoperator A 1) (? : Superoperator n A) :

```



```

(dualFiberBilinear A 1
  (Superoperator.comp e (Superoperator.tensorLeftUnitor A))).app
  (Superoperator.identity 1) ? =
  Superoperator.comp (effectPrecompose ? e)
  (Superoperator.tensorLeftUnitor n) := by
simp only [dualFiberBilinear_app, effectPrecompose]
calc
  Superoperator.comp
    (Superoperator.comp e (Superoperator.tensorLeftUnitor A))
    (Superoperator.tensor (Superoperator.identity 1) ?) =
  Superoperator.comp e
    (Superoperator.comp (Superoperator.tensorLeftUnitor A)
      (Superoperator.tensor (Superoperator.identity 1) ?)) := by
    rw [Superoperator.comp_assoc]
_ = Superoperator.comp e
  (Superoperator.comp ? (Superoperator.tensorLeftUnitor n)) := by
    rw [Superoperator.tensorLeftUnitor_naturality]
_ = Superoperator.comp (Superoperator.comp e ?)
  (Superoperator.tensorLeftUnitor n) := by
    rw [← Superoperator.comp_assoc]

```

#### 4.4.1137 Composition on the right by tensor left unitor is injective

**Statement.** Composition on the right by `tensorLeftUnitor` is injective. Formally: Injective fun  $\chi : \text{Superoperator } n \ 1 \Rightarrow \text{Superoperator.comp } \chi \ (\text{Superoperator.tensorLeftUnitor } n)$ .

**Proof.** The claim follows from a chain of equalities (or inequalities). The goal is simplified using the fact that the tensor left unitor and its inverse compose to the identity.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean](#)

```

theorem comp_tensorLeftUnitor_injective {n : Nat} :
  Function.Injective fun chi : Superoperator n 1 =>
    Superoperator.comp chi (Superoperator.tensorLeftUnitor n) := by
intro chi_1 chi_2 hcomp
have h :=
  congrArg
    (fun ? : Superoperator (1 * n) 1 =>
      Superoperator.comp ? (Superoperator.tensorLeftUnitorInv n)) hcomp
calc
  chi_1 = Superoperator.comp chi_1
    (Superoperator.comp (Superoperator.tensorLeftUnitor n)
      (Superoperator.tensorLeftUnitorInv n)) := by
    simp [Superoperator.tensorLeftUnitor_hom_inv]
_ = Superoperator.comp
  (Superoperator.comp chi_1 (Superoperator.tensorLeftUnitor n))
  (Superoperator.tensorLeftUnitorInv n) := Superoperator.comp_assoc _ _ _
_ = Superoperator.comp
  (Superoperator.comp chi_2 (Superoperator.tensorLeftUnitor n))
  (Superoperator.tensorLeftUnitorInv n) := h
_ = Superoperator.comp chi_2
  (Superoperator.comp (Superoperator.tensorLeftUnitor n)
    (Superoperator.tensorLeftUnitorInv n)) :=

```

```

      (Superoperator.comp_assoc _ _ _).symm
_ = chi_2 := by simp [Superoperator.tensorLeftUnitor_hom_inv]

```

#### 4.4.1138 Unit equality implies effect-precomposition equality

**Statement.** Unit equality implies effect-precomposition equality. Formally:  $\text{effectPrecompose } \Phi \ e = \text{effectPrecompose } \Psi \ e$ .

**Proof.** The key step rewrites with the dual fiber at  $q = 1$  recovers ordinary effect precomposition (up to the left unitor  $1 * A \simeq A$ ) and the fact that composition on the right by tensor left unitor is injective.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean](#)

```

theorem unit_eq_imp_effectPrecompose {A n : Nat}
  {? ? : Superoperator n A}
  (h : (DayNegation.unit (representable A)).app n ? =
    (DayNegation.unit (representable A)).app n ?)
  (e : Superoperator A 1) :
  effectPrecompose ? e = effectPrecompose ? e := by
have happ :=
  unit_eq_imp_bilinear_app h
  (dualFiberBilinear A 1
    (Superoperator.comp e (Superoperator.tensorLeftUnitor A)))
rw [dualFiberBilinear_one_app, dualFiberBilinear_one_app] at happ
exact comp_tensorLeftUnitor_injective happ

```

#### 4.4.1139 Fiberwise injectivity of the representable unit, given effect separation

**Statement.** Fiberwise injectivity of the representable unit, given effect separation. Formally:  $\text{Injective } ((\text{DayNegation.unit } (\text{representable } A)).\text{app } n)$ .

**Proof.** It follows from the hypothesis that if for every  $\Phi, \Psi$ , for every  $e$ ,  $\text{effectPrecompose } \Phi \ e = \text{effectPrecompose } \Psi \ e$ , then  $\Phi = \Psi$ .

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean](#)

```

theorem representable_unit_injective_of_effectPrecompose
  (A n : Nat)
  (hEff : forall {? ? : Superoperator n A},
    (forall e : Superoperator A 1, effectPrecompose ? e = effectPrecompose ? e) ->
      ? = ?) :
  Function.Injective ((DayNegation.unit (representable A)).app n) := by
intro ? ? h??
exact hEff (fun e => unit_eq_imp_effectPrecompose h?? e)

```

#### 4.4.1140 Unconditional fiberwise injectivity of the double-dual unit on representables

**Statement.** Unconditional fiberwise injectivity of the double-dual unit on representables. Formally:  $\Phi = \Psi$ .

**Proof.** This is an instance of the effects separate superoperators:  $\forall e, e \circ \Phi = e \circ \Psi$  implies  $\Phi = \Psi$ .

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean](#)

```
theorem representable_unit_injective {A n : Nat} (_hA : 0 < A)
  {? ? : Superoperator n A}
  (h : (DayNegation.unit (representable A)).app n ? =
    (DayNegation.unit (representable A)).app n ?) :
  ? = ? :=
  effectPrecompose_injective (fun e => unit_eq_imp_effectPrecompose h e)
```

#### 4.4.1141 Same statement packaged as injectivity

**Statement.** Same statement packaged as `Function.Injective`. Formally: `Injective ((DayNegation.unit (representable A)).app n)`.

**Proof.** Given the data, the conclusion is produced directly from the unconditional fiberwise injectivity of the double-dual unit on representables.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean](#)

```
theorem representable_unit_injective' {A n : Nat} (hA : 0 < A) :
  Function.Injective ((DayNegation.unit (representable A)).app n) :=
  fun _ _ h => representable_unit_injective hA h
```

#### 4.4.1142 Specialization: for $A = 2$ , $\Phi = \text{id}$

**Statement.** Specialization: for  $A = 2$ ,  $\Phi = \text{id}$ , every unit-fiber value  $\chi \circ \text{swap} \circ (\text{id} \otimes \text{id})$  is a genuine TNI effect (typed as `Superoperator`), whereas the raw cup Choi( $\text{id}_2$ ) itself fails  $\leq I$  (choi Identity\_two\_not\_le\_one).

**Proof.** This is an instance of the definition of the unit.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean](#)

```
theorem unit_fiber_id_is_tni {q : Nat} (chi : Superoperator (q * 2) 1) :
  TraceNonincreasing
    (((DayNegation.unit (representable 2)).app 2
      (Superoperator.identity 2)).app (Superoperator.identity 2)
      (dualFiberBilinear 2 q chi)).cp :=
  (((DayNegation.unit (representable 2)).app 2
    (Superoperator.identity 2)).app (Superoperator.identity 2)
    (dualFiberBilinear 2 q chi)).trace_nonincreasing
```

#### 4.4.1143 Choi matrix of the identity channel on $A$

**Definition.** Choi matrix of the identity channel on  $A$ .

**Construction.** Defined to be `(CPMap.identity A).choi`.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```
def choiIdentity (A : Nat) :
  Matrix (Fin A x Fin A) (Fin A x Fin A) ? :=
  (CPMap.identity A).choi
```

#### 4.4.1144 Unnormalized maximally-entangled vector $\sum_i |i, i\rangle$

**Definition.** Unnormalized maximally-entangled vector  $\sum_i |i, i\rangle$ .

**Construction.** The map sending  $p$  to  $\text{if } p.1 = p.2 \text{ then } 1 \text{ else } 0$ .

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```
def omegaVec (A : Nat) : Fin A x Fin A -> ? :=
  fun p => if p.1 = p.2 then 1 else 0
```

#### 4.4.1145 Pointwise formula for the Choi matrix of the identity

**Statement.** For a natural number  $A$ , indexes  $p, q$ : the Choi matrix of the identity of  $A$ ,  $p, q$  equals the product of  $\text{if } p.1 = p.2 \text{ then } 1 \text{ else } 0$  and  $\text{if } q.1 = q.2 \text{ then } 1 \text{ else } 0$ .

**Proof.** The goal is simplified using the definition of the Choi matrix of the identity, the definition of the identity, the Choi matrix of the map determined by a Kraus family and the Choi matrix of a single-entry element for Kraus families.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```
theorem choiIdentity_apply (A : Nat) (p q : Fin A x Fin A) :
  choiIdentity A p q =
    (if p.1 = p.2 then (1 : ?) else 0) *
    (if q.1 = q.2 then 1 else 0) := by
  simp only [choiIdentity, CPMap.identity, CPMap.choi_ofKraus,
    KrausFamily.identity, KrausFamily.choi_single, KrausFamily.choiTerm]
  simp [Matrix.one_apply]
```

#### 4.4.1146 $\omega$ of the dot of the $\omega$

**Statement.** For a natural number  $A$ :  $\text{star } (\omega\text{Vec } A) \cdot \omega\text{Vec } A = A$ .

**Proof.** The key step rewrites with the definition of the  $\omega$  vector and standard identities for finite types.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```
theorem omega_dot_omega (A : Nat) :
  star (omegaVec A) ?? omegaVec A = (A : ?) := by
  simp only [dotProduct, omegaVec]
  rw [Fintype.sum_prod_type]
  change
```

```

    (? i : Fin A, ? j : Fin A,
      star (if i = j then (1 : ?) else 0) *
        (if i = j then 1 else 0)) =
  A
simp

```

#### 4.4.1147 Sum of the diagonal indicator

**Statement.** For a natural number  $A$ :  $(\sum q : \text{Fin } A \times \text{Fin } A, (\text{if } q.1 = q.2 \text{ then } 1 \text{ else } 0)) = A$ .

**Proof.** The key step rewrites with standard identities for finite types.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean](#)

```

theorem sum_diagonal_indicator (A : Nat) :
  (? q : Fin A x Fin A, (if q.1 = q.2 then (1 : ?) else 0)) =
    (A : ?) := by
  rw [Fintype.sum_prod_type]
  change (? i : Fin A, ? j : Fin A, (if i = j then (1 : ?) else 0)) = A
simp

```

#### 4.4.1148 Choi matrix of the identity of the multiplication vector of the $\omega$

**Statement.** For a natural number  $A$ :  $\text{choiIdentity } A *_{\vee} \text{omegaVec } A$  equals the  $\omega$  vector of  $A$  scaled by  $A$ .

**Proof.** Both sides are compared pointwise (by extensionality). The claim follows from a chain of equalities (or inequalities). The argument splits on the relevant condition. The goal is simplified using the usual algebraic identities, the definition of the  $\omega$  vector, the pointwise formula for the Choi matrix of the identity and the sum of a congruence.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean](#)

```

theorem choiIdentity_mulVec_omega (A : Nat) :
  choiIdentity A *? omegaVec A = (A : ?) * omegaVec A := by
  ext p
  simp only [mulVec, Pi.smul_apply, smul_eq_mul, omegaVec, choiIdentity_apply]
  have hsum :
    (? q : Fin A x Fin A,
      (if p.1 = p.2 then (1 : ?) else 0) *
        (if q.1 = q.2 then 1 else 0)) =
      (A : ?) * (if p.1 = p.2 then 1 else 0) := by
    by_cases hp : p.1 = p.2
    * simp only [hp, ite_true, one_mul]
      simp using sum_diagonal_indicator A
    * simp [hp]
  calc
    (? q : Fin A x Fin A,
      (if p.1 = p.2 then (1 : ?) else 0) *
        (if q.1 = q.2 then 1 else 0)) *

```

```

      (if q.1 = q.2 then 1 else 0)) =
    ? q : Fin A x Fin A,
      (if p.1 = p.2 then (1 : ?) else 0) *
      (if q.1 = q.2 then 1 else 0) := by
        apply Finset.sum_congr rfl
        intro q _
        by_cases hq : q.1 = q.2 <|> simp [hq]
    _ = (A : ?) * (if p.1 = p.2 then 1 else 0) := hsum

```

#### 4.4.1149 For $A > 1$ , Choi(identity $a$ ) is not Loewner-below $I$ : it has eigenvalue $A$ on the maximally-entangled vector

**Statement.** For  $A > 1$ , Choi(id<sub>A</sub>) is **not** Loewner-below  $I$ : it has eigenvalue  $A$  on the maximally-entangled vector. Consequently it cannot be the input effect of any map  $A^2 \rightarrow 1$  in the TNI cone, so the raw compact-closed cup is not a dual element of  $\neg y(A)$ . Formally:  $\neg \text{choiIdentity } A \leq (1 : \text{Matrix } (\text{Fin } A \times \text{Fin } A) (\text{Fin } A \times \text{Fin } A) \mathbb{C})$ .

**Proof.** The claim follows from a chain of equalities (or inequalities). The key step rewrites with the usual algebraic identities, the Choi matrix of the identity of the multiplication vector of the  $\omega$ , distributivity of multiplication over finite sums and the  $\omega$  of the dot of the  $\omega$ .

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean](#)

```

theorem choiIdentity_not_le_one {A : Nat} (hA : 1 < A) :
  not choiIdentity A <=
    (1 : Matrix (Fin A x Fin A) (Fin A x Fin A) ?) := by
  intro hle
  have hpsd : (1 - choiIdentity A).PosSemidef := Matrix.le_iff.mp hle
  have hquad := hpsd.dotProduct_mulVec_nonneg (omegaVec A)
  have hcalc :
    star (omegaVec A) ?? (1 - choiIdentity A) *? omegaVec A =
      (1 - A : ?) * A := by
  simp only [sub_mulVec, one_mulVec, dotProduct_sub, choiIdentity_mulVec_omega]
  have hA? :
    star (omegaVec A) ?? ((A : ?) * omegaVec A) = (A : ?) * A := by
  change
    (? i, star (omegaVec A i) * ((A : ?) * omegaVec A i)) =
      (A : ?) * A
  have h := omega_dot_omega A
  change (? i, star (omegaVec A i) * omegaVec A i) = (A : ?) at h
  calc
    (? i, star (omegaVec A i) * (A * omegaVec A i)) =
      A * ? i, star (omegaVec A i) * omegaVec A i := by
      simp [mul_left_comm, Finset.mul_sum]
    _ = A * A := by rw [h]
  change
    star (omegaVec A) ?? omegaVec A -
      star (omegaVec A) ?? ((A : ?) * omegaVec A) =
      (1 - A : ?) * A
  rw [omega_dot_omega, hA?]
  ring
  have hre :
    (star (omegaVec A) ?? (1 - choiIdentity A) *? omegaVec A).re < 0 := by

```

```

rw [hcalc]
have : ((1 - A : ?) * A).re = (1 - (A : ?)) * A := by
  simp [Complex.mul_re, Complex.sub_re]
rw [this]
have hA0 : (0 : ?) < A := by exact_mod_cast (Nat.zero_lt_of_lt hA)
have h1A : (1 - (A : ?)) < 0 := by
  have : (1 : ?) < A := by exact_mod_cast hA
  linarith
exact mul_neg_of_neg_of_pos h1A hA0
have hnonneg :
  0 <= (star (omegaVec A) ?? (1 - choiIdentity A) *? omegaVec A).re :=
  (Complex.nonneg_iff.mp hquad).1
exact not_lt.mpr hnonneg hre

```

#### 4.4.1150 Specialization: the $A = 2$ cup obstruction (Choi(id) has eigenvalue 2)

**Statement.** Specialization: the  $A = 2$  cup obstruction (Choi(id) has eigenvalue 2). Formally:  $\neg \text{choiIdentity } 2 \leq (1 : \text{Matrix } (\text{Fin } 2 \times \text{Fin } 2) (\text{Fin } 2 \times \text{Fin } 2) \mathbb{C})$ .

**Proof.** This is an instance of the fact that for  $A > 1$ , Choi(identity a) is **not** Loewner-below I: it has eigenvalue A on the maximally-entangled vector.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean](#)

```

theorem choiIdentity_two_not_le_one :
  not choiIdentity 2 <=
    (1 : Matrix (Fin 2 x Fin 2) (Fin 2 x Fin 2) ?) :=
  choiIdentity_not_le_one (by decide)

/ -! ## Discard counterexample refuted; normalized cup; surjectivity status -/

```

#### 4.4.1151 Every superoperator of $\_$ and 1 is TNI, so its output mass on a state of trace $t$ is at most $t$

**Statement.** Every Superoperator  $\_$  1 is TNI, so its output mass on a state of trace  $t$  is at most  $t$ . In particular, double-dual bilinear values (which land in Superoperator) cannot exhibit the “mass A” reading of raw discard. Formally:  $(\text{tr } (\chi.\text{cp.applyMat } \rho)).\text{re} \leq (\text{tr } \rho).\text{re}$ .

**Proof.** The proof term combines the facts named in it directly.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean](#)

```

theorem effect_extract_mass_le_one {k : Nat}
  (chi : Superoperator k 1)
  (? : Matrix (Fin k) (Fin k) ?) (h? : ?.PosSemidef) :
  (Matrix.trace (chi.cp.applyMat ?)).re <= (Matrix.trace ?).re :=
  chi.trace_nonincreasing ? h?

```

#### 4.4.1152 Definition of the discard effect

**Definition.** `Discard ofEffect I_A` is a first-dual fiber element  $\neg y(A)_1 \simeq \text{Superoperator } A \ 1$ , via `dualFiberBilinear / the closed-adjunction fiber`. It is **not** an element of  $((\neg y(A)) \cdot \text{obj } n)$ . Transporting discard into the double dual would require an additional embedding that the raw Day negation does not supply; the mass-A pairing intuition cannot appear inside `Superoperator`-valued double-dual outputs (`effect_extract_mass_le_one`).

**Construction.** Defined to be the map determined by an effect of `1 : Matrix (Fin A) (Fin A)`  $\mathbb{C}$ , the one, the order reflexivity of `_`.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```
noncomputable def discardEffect (A : Nat) : Superoperator A 1 :=
  ofEffect (1 : Matrix (Fin A) (Fin A) ?)
    Matrix.PosSemidef.one (le_refl _)
```

#### 4.4.1153 First-dual packaging of discard (closed-adjunction fiber at $q = 1$ )

**Definition.** First-dual packaging of discard (closed-adjunction fiber at  $q = 1$ ).

**Construction.** Defined to be the dual fiber bilinear map of `A` and the composite of `discardEffect A` after `Superoperator.tensorLeftUnitor A at 1`.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```
noncomputable def discardFirstDual (A : Nat) :
  ((DayNegation.neg (representable A)).obj 1).Carrier :=
  dualFiberBilinear A 1
    (Superoperator.comp (discardEffect A)
      (Superoperator.tensorLeftUnitor A))
```

#### 4.4.1154 For any preparation $\Phi : 1 \rightarrow A$

**Statement.** For any preparation  $\Phi : 1 \rightarrow A$ , discard-precomposition has mass  $\text{Tr}(\Phi(1)) \leq 1$ , so discard cannot obstruct the image of `unit.app 1` by a mass-A mismatch. Formally: `(tr ((effect Precompose  $\Phi$  (ofEffect 1 hI hle)).cp.applyMat (1 : Matrix (Fin 1) (Fin 1)  $\mathbb{C}$ ))).re  $\leq 1$ .`

**Proof.** The goal is simplified using standard identities for matrices and standard identities for complex numbers.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```
theorem discard_precompose_mass_le_one {A : Nat}
  (? : Superoperator 1 A)
  (hI : (1 : Matrix (Fin A) (Fin A) ?).PosSemidef := Matrix.PosSemidef.one)
  (hle : (1 : Matrix (Fin A) (Fin A) ?) <= 1 := le_refl _) :
  (Matrix.trace
    ((effectPrecompose ? (ofEffect 1 hI hle)).cp.applyMat
```



```

      (1 : Matrix (Fin 1) (Fin 1) ?)).re <=
    (1 : ?) := by
  have h? : (1 : Matrix (Fin 1) (Fin 1) ?).PosSemidef := Matrix.PosSemidef.one
  have htr :=
    (effectPrecompose ? (ofEffect 1 hI hle)).trace_nonincreasing _ h?
  have : Matrix.trace (1 : Matrix (Fin 1) (Fin 1) ?) = (1 : ?) := by
    simp [Matrix.trace_one]
  simpa [this, Complex.one_re] using htr

```

#### 4.4.1155 Choi(id) as an outer product $|\Omega\rangle\langle\Omega|$

**Statement.** Choi(id) as an outer product  $|\Omega\rangle\langle\Omega|$ . Formally: `choiIdentity A = Matrix.vecMulVec (omegaVec A) (star (omegaVec A))`.

**Proof.** Both sides are compared pointwise (by extensionality). The argument splits on the relevant condition. The goal is simplified using the pointwise formula for the Choi matrix of the identity, standard identities for matrices and the definition of the  $\omega$  vector.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean](#)

```

theorem choiIdentity_eq_vecMulVec (A : Nat) :
  choiIdentity A =
    Matrix.vecMulVec (omegaVec A) (star (omegaVec A)) := by
  ext p q
  simp only [choiIdentity_apply, Matrix.vecMulVec_apply, omegaVec, Pi.star_apply]
  split_ifs <|> simp

```

#### 4.4.1156 Positive semidefiniteness of the Choi matrix of the identity

**Statement.** For a natural number A: `choiIdentity A` is positive semidefinite.

**Proof.** The key step rewrites with the Choi(id) as an outer product  $|\Omega\rangle\langle\Omega|$  and standard identities for matrices.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean](#)

```

theorem choiIdentity_posSemidef (A : Nat) :
  (choiIdentity A).PosSemidef := by
  rw [choiIdentity_eq_vecMulVec]
  exact Matrix.posSemidef_vecMulVec_self_star _

```

#### 4.4.1157 Normalized maximally-entangled vector $\Omega / \sqrt{A}$

**Definition.** Normalized maximally-entangled vector  $\Omega / \sqrt{A}$ .

**Construction.** Defined to be the  $\omega$  vector of A scaled by the square root of  $A^{-1}$ .

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean](#)

```

noncomputable def omegaUnitVec (A : Nat) (_hA : 0 < A) :
  Fin A × Fin A → ? :=
  ((Real.sqrt (A : ?) : ?)^-1) * omegaVec A

```

#### 4.4.1158 $\omega$ unit vector of the norm

**Statement.** For a natural number  $A$ : if  $0 < A$ , then  $\text{star } (\text{omegaUnitVec } A \text{ } hA) \cdot \text{omegaUnitVec } A \text{ } hA = 1$ .

**Proof.** The claim follows from a chain of equalities (or inequalities). The key step rewrites with standard identities for complex numbers, the definition of the  $\omega$  unit vector, the adjoint of the dot product of a scalar multiple of itself and the  $\omega$  of the dot of the  $\omega$ .

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean](#)

```

theorem omegaUnitVec_norm {A : Nat} (hA : 0 < A) :
  star (omegaUnitVec A hA) ?? omegaUnitVec A hA = 1 := by
  have hs_pos : 0 < Real.sqrt (A : ?) :=
    Real.sqrt_pos.mpr (Nat.cast_pos.mpr hA)
  have hs_ne : (Real.sqrt (A : ?) : ?) != 0 :=
    Complex.ofReal_ne_zero.mpr (ne_of_gt hs_pos)
  have hs2 : (Real.sqrt (A : ?) : ?) * (Real.sqrt (A : ?) : ?) = (A : ?) := by
    exact_mod_cast (Real.mul_self_sqrt (Nat.cast_nonneg A))
  have hstar : star (Real.sqrt (A : ?) : ?) = (Real.sqrt (A : ?) : ?) := by
    rw [Complex.star_def, Complex.conj_ofReal]
  simp only [omegaUnitVec]
  rw [star_dotProduct_smul_self, star_inv_0, hstar, omega_dot_omega]
  field_simp [hs_ne]
  calc
    (A : ?) = (Real.sqrt (A : ?) : ?) * (Real.sqrt (A : ?) : ?) := hs2.symm
    _ = (Real.sqrt (A : ?) : ?) ^ 2 := (pow_two _).symm

```

#### 4.4.1159 The Choi matrix of the identity of the div equals the unit of the computational-basis projector

**Statement.** For a natural number  $A$ : if  $0 < A$ , then the Choi matrix of the identity of  $A$  scaled by  $A^{-1}$  equals the outer product of the  $\omega$  unit vector of  $A$  and  $hA$  and the adjoint of  $\text{omegaUnitVec } A \text{ } hA$ .

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with standard identities for complex numbers, the Choi(id) as an outer product  $|\Omega\rangle\langle\Omega|$ , standard identities for matrices and the definition of the  $\omega$  unit vector.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean](#)

```

theorem choiIdentity_div_eq_unit_projector {A : Nat} (hA : 0 < A) :
  ((A : ?)^-1 : ?) * choiIdentity A =
    Matrix.vecMulVec (omegaUnitVec A hA) (star (omegaUnitVec A hA)) := by
  have hs_pos : 0 < Real.sqrt (A : ?) :=
    Real.sqrt_pos.mpr (Nat.cast_pos.mpr hA)
  have hs_ne : (Real.sqrt (A : ?) : ?) != 0 :=
    Complex.ofReal_ne_zero.mpr (ne_of_gt hs_pos)

```

```

have hs2 : (Real.sqrt (A : ?) : ?) * (Real.sqrt (A : ?) : ?) = (A : ?) := by
  exact_mod_cast (Real.mul_self_sqrt (Nat.cast_nonneg A))
have hstar : star (Real.sqrt (A : ?) : ?) = (Real.sqrt (A : ?) : ?) := by
  rw [Complex.star_def, Complex.conj_ofReal]
rw [choiIdentity_eq_vecMulVec]
ext p q
simp only [Matrix.smul_apply, Matrix.vecMulVec_apply, omegaUnitVec,
  Pi.smul_apply, smul_eq_mul, Pi.star_apply]
rw [star_mul, star_inv_0, hstar]
have hscale :
  ((A : ?)^-1 : ?) * (omegaVec A p * star (omegaVec A q)) =
    ((Real.sqrt (A : ?) : ?)^-1 * omegaVec A p) *
      (star (omegaVec A q) * (Real.sqrt (A : ?) : ?)^-1) := by
  field_simp [hs_ne]
have hs2' : (Real.sqrt (A : ?) : ?) ^ 2 = (A : ?) := by
  rw [pow_two, hs2]
simp [hs2', mul_assoc, mul_comm]
exact hscale

```

#### 4.4.1160 Normalized cup. For $A > 0$

**Statement. Normalized cup.** For  $A > 0$ ,  $(1/A) \cdot \text{Choi}(\text{id}_A)$  is a rank-one orthogonal projector onto  $\Omega/\sqrt{A}$ , hence Loewner-below  $I$ . This is the matrix-level content of weak dualizability (normalized cup/cap) for  $y(A)$ . Formally:  $A^{-1} \cdot \text{choiIdentity } A \leq (1 : \text{Matrix } (\text{Fin } A \times \text{Fin } A) (\text{Fin } A \times \text{Fin } A) \mathbb{C})$ .

**Proof.** The key step rewrites with the fact that the Choi matrix of the identity of the div equals the unit of the computational-basis projector and the fact that unit rank-one  $|v\rangle\langle v|$  is an orthogonal projector, hence Loewner-below  $I$ .

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean](#)

```

theorem choiIdentity_div_le_one {A : Nat} (hA : 0 < A) :
  ((A : ?)^-1 : ?) * choiIdentity A <=
    (1 : Matrix (Fin A x Fin A) (Fin A x Fin A) ?) := by
  rw [choiIdentity_div_eq_unit_projector hA]
  exact vecMulVec_unit_le_one (omegaUnitVec A hA) (omegaUnitVec_norm hA)

```

#### 4.4.1161 Positive semidefiniteness of the Choi matrix of the identity of the div

**Statement.** For a natural number  $A$ : if  $0 < A$ , then  $A^{-1} \cdot \text{choiIdentity } A$  is positive semidefinite.

**Proof.** The key step rewrites with the fact that the Choi matrix of the identity of the div equals the unit of the computational-basis projector and standard identities for matrices.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean](#)

```

theorem choiIdentity_div_posSemidef {A : Nat} (hA : 0 < A) :
  (((A : ?)^-1 : ?) * choiIdentity A).PosSemidef := by
  rw [choiIdentity_div_eq_unit_projector hA]
  exact Matrix.posSemidef_vecMulVec_self_star _

```

```
/-! ## Normalized cup as a dual probe; cup-name evaluation -/
```

#### 4.4.1162 Reindex $(1/A) \cdot \text{Choi}(\text{id})$ from $\text{Fin } A \times \text{Fin } A$ to $\text{Fin } (A \cdot A)$

**Definition.**  $\text{Reindex } (1/A) \cdot \text{Choi}(\text{id})$  from  $\text{Fin } A \times \text{Fin } A$  to  $\text{Fin } (A \cdot A)$ .

**Construction.** Defined to be the reindexing of the finite index prod finite index equivalence, the finite index prod finite index equivalence, the Choi matrix of the identity of  $A$  scaled by  $A^{-1}$ .

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean](#)

```
noncomputable def normalizedCupMatrix (A : Nat) (_hA : 0 < A) :
  Matrix (Fin (A * A)) (Fin (A * A)) ? :=
  Matrix.reindex finProdFinEquiv finProdFinEquiv
  (((A : ?)^-1 : ?) * choiIdentity A)
```

#### 4.4.1163 Positive semidefiniteness of the normalized cup matrix

**Statement.** For a natural number  $A$ : if  $0 < A$ , then  $\text{normalizedCupMatrix } A \ hA$  is positive semidefinite.

**Proof.** The goal is simplified using the definition of the normalized cup matrix and the reindexing for countable Choi sums.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean](#)

```
theorem normalizedCupMatrix_posSemidef {A : Nat} (hA : 0 < A) :
  (normalizedCupMatrix A hA).PosSemidef := by
  -- `reindex e e M = M.submatrix e.symm e.symm`
  simp [normalizedCupMatrix, Matrix.reindex] using
  (choiIdentity_div_posSemidef hA).submatrix (finProdFinEquiv.symm)
```

#### 4.4.1164 The reindexing of one equals one

**Statement.** The reindexing of  $e$  at  $1$  equals  $1$ . Formally:  $\text{Matrix.reindex } e \ e \ 1 = 1$ .

**Proof.** Both sides are compared pointwise (by extensionality). The goal is simplified using standard identities for matrices.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean](#)

```
theorem reindex_one_eq_one {α β : Type*} [Fintype α] [DecidableEq α]
  [Fintype β] [DecidableEq β] (e : α → β) :
  Matrix.reindex e e (1 : Matrix α α) = (1 : Matrix β β) := by
  ext i j
  simp [Matrix.reindex_apply, Matrix.one_apply]
```

#### 4.4.1165 Reindexing of a difference

**Statement.** For matrixes  $M, N$ : the reindexing of  $e, e$ , the difference of  $M$  and  $N$  equals the difference of the reindexing of  $e, e, M$  and the reindexing of  $e, e, N$ .

**Proof.** Both sides are compared pointwise (by extensionality). The goal is simplified using standard identities for matrices.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```
theorem reindex_sub {α β : Type*} [Fintype α] [Fintype β]
  (e : α → β) (M N : Matrix α β) :
  Matrix.reindex e e (M - N) =
    Matrix.reindex e e M - Matrix.reindex e e N := by
  ext; simp [Matrix.reindex_apply, Matrix.sub_apply]
```

#### 4.4.1166 The reindexing is at most one

**Statement.** For a matrix  $M$ : if  $M \leq 1$ , then  $\text{Matrix.reindex } e \ e \ M \leq 1$ .

**Proof.** The key step rewrites with the characterization of the order for subnormalized density matrices, the fact that the reindexing of one equals one, the reindexing of a difference and the reindexing for countable Choi sums.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```
theorem reindex_le_one {α β : Type*} [Fintype α] [DecidableEq β]
  [Fintype β] [DecidableEq β] (e : α → β)
  {M : Matrix α β} (h : M ≤ (1 : Matrix α β)) :
  Matrix.reindex e e M ≤ (1 : Matrix α β) := by
  rw [Matrix.le_iff] at h |·
  have h1 : (1 : Matrix α β) - Matrix.reindex e e M =
    Matrix.reindex e e (1 - M) := by
  rw [← reindex_one_eq_one e, ← reindex_sub]
  rw [h1]
  simp [Matrix.reindex] using (h.submatrix e.symm)
```

#### 4.4.1167 The normalized cup matrix is at most one

**Statement.** For a natural number  $A$ : if  $0 < A$ , then  $\text{normalizedCupMatrix } A \ hA \leq (1 : \text{Matrix } (\text{Fin } (A * A)) (\text{Fin } (A * A)) \mathbb{C})$ .

**Proof.** The goal is simplified using the definition of the normalized cup matrix.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```
theorem normalizedCupMatrix_le_one {A : Nat} (hA : 0 < A) :
  normalizedCupMatrix A hA ≤
    (1 : Matrix (Fin (A * A)) (Fin (A * A)) ℂ) := by
  simp [normalizedCupMatrix] using
    reindex_le_one finProdFinEquiv (choiIdentity_div_le_one hA)
```

#### 4.4.1168 Normalized cup as a TNI effect $A^2 \rightarrow 1$

**Definition.** Normalized cup as a TNI effect  $A^2 \rightarrow 1$ .

**Construction.** Defined to be the map determined by an effect of the normalized cup matrix of A and hA, the normalized cup matrix positivity semidef of hA, the normalized cup matrix order one of hA.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```
noncomputable def normalizedCup (A : Nat) (hA : 0 < A) :  
  Superoperator (A * A) 1 :=  
  ofEffect (normalizedCupMatrix A hA)  
    (normalizedCupMatrix_posSemidef hA)  
    (normalizedCupMatrix_le_one hA)
```

#### 4.4.1169 Normalized cup of the effect

**Statement.** For a natural number A: if  $0 < A$ , then `(normalizedCup A hA).cp.effect` equals the normalized cup matrix of A and hA.

**Proof.** This is an instance of the map determined by an effect of the effect.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```
theorem normalizedCup_effect {A : Nat} (hA : 0 < A) :  
  (normalizedCup A hA).cp.effect = normalizedCupMatrix A hA :=  
  ofEffect_effect _ _ _
```

#### 4.4.1170 Dual-fiber probe at $q = A$ generated by the normalized cup

**Definition.** Dual-fiber probe at  $q = A$  generated by the normalized cup.

**Construction.** Defined to be the dual fiber bilinear map of A, A, the normalized cup of A and hA.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```
noncomputable def normalizedCupProbe (A : Nat) (hA : 0 < A) :  
  ((DayNegation.neg (representable A)).obj A).Carrier :=  
  dualFiberBilinear A A (normalizedCup A hA)
```

#### 4.4.1171 Definition of the cup name

**Definition.** Cup-name of a map  $n \rightarrow A$ : `cup  $\circ$  swap  $\circ$  ( $\Phi \otimes \text{id}_A$ )`.

**Construction.** Defined to be the composite of the normalized cup of A and hA after the composite of `Superoperator.tensorSwap A A` after `Superoperator.tensor  $\Phi$  (Superoperator.identity A)`.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```

noncomputable def cupName {A : Nat} (hA : 0 < A) {n : Nat}
  (? : Superoperator n A) : Superoperator (n * A) 1 :=
  Superoperator.comp (normalizedCup A hA)
  (Superoperator.comp (Superoperator.tensorSwap A A)
    (Superoperator.tensor ? (Superoperator.identity A)))

```

#### 4.4.1172 Unit evaluation at the normalized-cup probe is the cup-name

**Statement.** Unit evaluation at the normalized-cup probe is the cup-name.

**Proof.** The goal is simplified using the definition of the normalized cup probe and the definition of the cup name.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean](#)

```

theorem unit_app_normalizedCupProbe {A n : Nat} (hA : 0 < A)
  (? : Superoperator n A) :
  ((DayNegation.unit (representable A)).app n ?).app
    (Superoperator.identity n) (normalizedCupProbe A hA) =
  cupName hA ? := by
  simpa [normalizedCupProbe, cupName] using
    unit_fiber_eq ? (normalizedCup A hA)

```

#### 4.4.1173 Equivalence (output, input) $\simeq$ flat for Choi $\leftrightarrow$ effect-on- $n \star A$

**Definition.** Equivalence (output, input)  $\simeq$  flat for Choi  $\leftrightarrow$  effect-on- $n \star A$ .

**Construction.** Defined to be (Equiv.prodComm (Fin A) (Fin n)).trans finProdFinEquiv.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean](#)

```

noncomputable def choiFlatEquiv (A n : Nat) :
  Fin A × Fin n → Fin (n * A) :=
  (Equiv.prodComm (Fin A) (Fin n)).trans finProdFinEquiv

```

#### 4.4.1174 Build a Choi matrix on $\text{Fin } A \times \text{Fin } n$ by reindexing the *transpose* of an effect on $\text{Fin } (n \star A)$

**Definition.** Build a Choi matrix on  $\text{Fin } A \times \text{Fin } n$  by reindexing the *transpose* of an effect on  $\text{Fin } (n \star A)$ . The transpose matches the cup-name snake ( $\chi \circ \text{swap} \circ (\Phi \otimes \text{id})$  recovers  $\Phi.\text{choi}$  rather than its index-swap).

**Construction.** Defined to be the reindexing of (choiFlatEquiv A n).symm, (choiFlatEquiv A n).symm,  $E^T$ .

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean](#)

```

noncomputable def effectAsChoi {A n : Nat}
  (E : Matrix (Fin (n * A)) (Fin (n * A)) ?) :
  Matrix (Fin A x Fin n) (Fin A x Fin n) ? :=
  Matrix.reindex (choiFlatEquiv A n).symm (choiFlatEquiv A n).symm E?

```

#### 4.4.1175 Pointwise formula for the effect as Choi

**Statement.** For natural numbers  $A, n$ , a matrix  $E$ , indexes  $p, q$ :  $\text{effectAsChoi } (A := A) (n := n) E p q$  equals the  $e$  of the finite index prod finite index equivalence of  $q.2, q.1$  and the finite index prod finite index equivalence of  $p.2, p.1$ .

**Proof.** The goal is simplified using the definition of the effect as Choi, standard identities for matrices and the definition of the Choi flat equivalence.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean](#)

```

theorem effectAsChoi_apply {A n : Nat}
  (E : Matrix (Fin (n * A)) (Fin (n * A)) ?)
  (p q : Fin A x Fin n) :
  effectAsChoi (A := A) (n := n) E p q =
  E (finProdFinEquiv (q.2, q.1)) (finProdFinEquiv (p.2, p.1)) := by
  -- `reindex e.symm e.symm E? p q = E? (e p) (e q) = E (e q) (e p)`.
  simp only [effectAsChoi, Matrix.reindex_apply, choiFlatEquiv]
  rfl

```

#### 4.4.1176 Positive semidefiniteness of the effect as Choi

**Statement.** For natural numbers  $A, n$ , a matrix  $E$ : if  $E$  is positive semidefinite, then  $\text{effectAsChoi } (A := A) (n := n) E$  is positive semidefinite.

**Proof.** The goal is simplified using the definition of the effect as Choi and the reindexing for countable Choi sums.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean](#)

```

theorem effectAsChoi_posSemidef {A n : Nat}
  {E : Matrix (Fin (n * A)) (Fin (n * A)) ?} (hE : E.PosSemidef) :
  (effectAsChoi (A := A) (n := n) E).PosSemidef := by
  have hT : E?.PosSemidef := hE.transpose
  simpa [effectAsChoi, Matrix.reindex] using
    hT.submatrix (choiFlatEquiv A n)

```

#### 4.4.1177 Choi CP map recovered from a cup-name effect (scale 1, no TNI)

**Definition.** Choi CP map recovered from a cup-name effect (scale 1, no TNI).

**Construction.** Constructed by supplying each component: Choi matrix and Choi positivity. The accompanying laws are verified from the definitions.



**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean](#)

```
noncomputable def cupNameCP {A n : Nat}
  (chi : Superoperator (n * A) 1) : CMap n A where
  choi := effectAsChoi (A := A) (n := n) chi.cp.effect
  choi_pos := effectAsChoi_posSemidef (CMap.effect_posSemidef chi.cp)
```

**4.4.1178 For  $A = 1$ , the normalized cup matrix is the  $1 \times 1$  identity**

**Statement.** For  $A = 1$ , the normalized cup matrix is the  $1 \times 1$  identity. Formally: `normalizedCupMatrix 1` (by decide) = `(1 : Matrix (Fin (1 * 1)) (Fin (1 * 1)) ℂ)`.

**Proof.** Both sides are compared pointwise (by extensionality). An equation between variables is used to substitute one for the other. The key step rewrites with standard identities for finite indices, standard identities for matrices, the pointwise formula for the Choi matrix of the identity and the usual algebraic identities. The remaining numerical facts are checked by direct computation.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean](#)

```
theorem normalizedCupMatrix_one :
  normalizedCupMatrix 1 (by decide) =
    (1 : Matrix (Fin (1 * 1)) (Fin (1 * 1)) ?) := by
  ext i j
  have hi : i = <0, by decide> := Fin.ext (by omega)
  have hj : j = <0, by decide> := Fin.ext (by omega)
  subst hi; subst hj
  have hfwd : finProdFinEquiv ((<0, by decide> : Fin 1), (<0, by decide> : Fin 1)) =
    (<0, by decide> : Fin (1 * 1)) := by
    simp [finProdFinEquiv, Fin.divNat, Fin.modNat]
  have hpair : finProdFinEquiv.symm (<0, by decide> : Fin (1 * 1)) =
    ((<0, by decide> : Fin 1), (<0, by decide> : Fin 1)) := by
    apply (finProdFinEquiv (m := 1) (n := 1)).injective
  exact hfwd.symm
  -- Goal reduces to `((1:?)^-1 * choiIdentity 1) (0,0) (0,0) = 1`.
  change
    (((1 : Nat) : ?)^-1 : ?) * choiIdentity 1
    (finProdFinEquiv.symm <0, by decide>)
    (finProdFinEquiv.symm <0, by decide>) =
    1
  rw [hpair]
  simp only [Matrix.smul_apply, choiIdentity_apply, reduceIte, smul_eq_mul]
  -- `(1:?)^-1 * 1 = 1`
  norm_num

/-! ### Cup-name snake / Choi recovery -/
```

**4.4.1179 Effect of post-composing with a map into 1**

**Statement.** Effect of post-composing with a map into 1. Formally: `(CMap.comp e Φ).effect i j` =  $\sum x : \text{Fin } A, \sum y : \text{Fin } A, e.\text{effect } y \ x * \Phi.\text{choi } (x, j) (y, i)$ .

**Proof.** The goal is simplified using the definition of the effect, the coordinate formula for intrinsic Choi composition and standard identities for finite indices.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean](#)

```
theorem effect_comp_effect {n A : Nat} (e : CMap A 1) (? : CMap n A) (i j : Fin n) :
  (CMap.comp e ?).effect i j =
    ? x : Fin A, ? y : Fin A, e.effect y x * ?.choi (x, j) (y, i) := by
  simp [CMap.effect, CMap.choi_comp_apply, Fin.default_eq_zero]
```

#### 4.4.1180 Effect of precomposing an effect with a basis equivalence

**Statement.** Effect of precomposing an effect with a basis equivalence. Formally:  $(\text{Superoperator.comp } \Phi (\text{Superoperator.ofEquivalence } e)).\text{cp.effect } i \ j = \Phi.\text{cp.effect } (e \ i) \ (e \ j)$ .

**Proof.** The goal is simplified using the definition of the effect, the underlying completely positive map of a composite for superoperators, standard identities for finite types and standard identities for finite indices.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean](#)

```
theorem effect_comp_ofEquivalence {n m : Nat} (e : Fin n ? Fin m)
  (? : Superoperator m 1) (i j : Fin n) :
  (Superoperator.comp ? (Superoperator.ofEquivalence e)).cp.effect i j =
    ?.cp.effect (e i) (e j) := by
  simp only [CMap.effect, Superoperator.cp_comp, Fintype.sum_unique, Fin.
    default_eq_zero]
  have h := Superoperator.choi_comp_ofEquivalence_right e ? (0 : Fin 1) 0 j i
  simpa [Superoperator.cp_comp] using h
```

#### 4.4.1181 Choi matrix of the identity of a pair

**Statement.** For a natural number A, indexes c, r, d, s:  $(\text{CMap.identity } A).\text{choi } (c, \ r) \ (d, \ s)$  equals the product of if c = r then 1 else 0 and if d = s then 1 else 0.

**Proof.** The key step rewrites with the pointwise formula for the Choi matrix of the identity.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean](#)

```
theorem choi_identity_pair (A : Nat) (c r d s : Fin A) :
  (CMap.identity A).choi (c, r) (d, s) =
    (if c = r then (1 : ?) else 0) * (if d = s then 1 else 0) := by
  change choiIdentity A (c, r) (d, s) = _
  rw [choiIdentity_apply]
```

#### 4.4.1182 The Choi matrix tensor product identity right

**Statement.** For natural numbers  $n, A$ , a completely positive map  $\Phi$ , indexes  $a, b, c, d, p, q, r, s$ : an explicit expression in the tensor product, the identity and the finite index prod finite index equivalence equals an explicit expression.

**Proof.** The key step rewrites with the Choi matrix of a tensor product for completely positive maps, standard identities for matrices, the definition of the Choi tensor product equivalence and standard identities for equivalences. The remaining identity is a polynomial identity in a commutative ring.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean](#)

```
theorem choi_tensor_id_right {n A : Nat} (? : CMap n A)
  (a b : Fin A) (c d : Fin A) (p q : Fin n) (r s : Fin A) :
  (CMap.tensor ? (CMap.identity A)).choi
    (finProdFinEquiv (a, c), finProdFinEquiv (p, r))
    (finProdFinEquiv (b, d), finProdFinEquiv (q, s)) =
  ?.choi (a, p) (b, q) *
    (if c = r then (1 : ?) else 0) * (if d = s then 1 else 0) := by
  rw [CMap.choi_tensor]
  simp only [Matrix.reindex_apply, Matrix.submatrix_apply]
  have h1 : (CMap.choiTensorEquiv n A A A).symm
    (finProdFinEquiv (a, c), finProdFinEquiv (p, r)) =
    ((a, p), (c, r)) := by
    dsimp [CMap.choiTensorEquiv]; simp only [Equiv.symm_apply_apply]
  have h2 : (CMap.choiTensorEquiv n A A A).symm
    (finProdFinEquiv (b, d), finProdFinEquiv (q, s)) =
    ((b, q), (d, s)) := by
    dsimp [CMap.choiTensorEquiv]; simp only [Equiv.symm_apply_apply]
  rw [h1, h2]; simp only [Matrix.kronecker_apply]; rw [choi_identity_pair]; ring
```

#### 4.4.1183 Pointwise formula for the normalized cup of the effect

**Statement.** For a natural number  $A$ , indexes  $u, v$ : if  $0 < A$ , then  $(\text{normalizedCup } A \text{ hA}).\text{cp}.$  effect  $u \ v$  equals an explicit expression in the symmetry.

**Proof.** The key step rewrites with the normalized cup of the effect, the definition of the normalized cup matrix, standard identities for matrices and the pointwise formula for the Choi matrix of the identity. The remaining identity is a polynomial identity in a commutative ring.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean](#)

```
theorem normalizedCup_effect_apply {A : Nat} (hA : 0 < A) (u v : Fin (A * A)) :
  (normalizedCup A hA).cp.effect u v =
  ((A : ?)^-1 : ?) *
    (if (finProdFinEquiv.symm u).1 = (finProdFinEquiv.symm u).2 then (1 : ?) else
  0) *
    (if (finProdFinEquiv.symm v).1 = (finProdFinEquiv.symm v).2 then 1 else 0) :=
  by
  rw [normalizedCup_effect, normalizedCupMatrix]
  simp only [Matrix.reindex_apply, Matrix.submatrix_apply, Matrix.smul_apply,
    choiIdentity_apply, smul_eq_mul]
  ring
```

#### 4.4.1184 Sum of the me of the indicators

**Statement.** For natural numbers  $n, A$ , a matrix  $C$ , indexes  $p, q, r, s$ : an explicit expression equals the classical of  $s, q$  and  $r, p$ .

**Proof.** The argument splits on the relevant condition. The key step rewrites with standard identities for finite sums.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean](#)

```
theorem sum_me_indicators {n A : Nat} (C : Matrix (Fin A x Fin n) (Fin A x Fin n)
  ?)
  (p q : Fin n) (r s : Fin A) :
  (? a : Fin A, ? c : Fin A, ? b : Fin A, ? d : Fin A,
    (if b = d then (1 : ?) else 0) * (if a = c then 1 else 0) *
      C (a, q) (b, p) * (if c = s then 1 else 0) * (if d = r then 1 else 0)) =
    C (s, q) (r, p) := by
  classical
  have hterm (a c b d : Fin A) :
    (if b = d then (1 : ?) else 0) * (if a = c then 1 else 0) *
      C (a, q) (b, p) * (if c = s then 1 else 0) * (if d = r then 1 else 0) =
      if a = s /\ c = s /\ b = r /\ d = r then C (s, q) (r, p) else 0 := by
    by_cases hbd : b = d <|> by_cases hac : a = c <|>
    by_cases hcs : c = s <|> by_cases hdr : d = r <|>
    simp [hbd, hac, hcs, hdr] <|> (try subst_vars) <|> simp_all
  simp_rw [hterm]
  rw [Finset.sum_eq_single s]
  * rw [Finset.sum_eq_single s]
  * rw [Finset.sum_eq_single r]
  * rw [Finset.sum_eq_single r]
  * simp
  * intro d _ hd; simp [hd]
  * intro h; exact (h (Finset.mem_univ _)).elim
  * intro b _ hb; simp [hb]
  * intro h; exact (h (Finset.mem_univ _)).elim
  * intro c _ hc; simp [hc]
  * intro h; exact (h (Finset.mem_univ _)).elim
  * intro a _ ha; simp [ha]
  * intro h; exact (h (Finset.mem_univ _)).elim
```

#### 4.4.1185 Maps into 1 are determined by their input effects

**Statement.** Maps into 1 are determined by their input effects. Formally:  $\Phi = \Psi$ .

**Proof.** Both sides are compared pointwise (by extensionality). The claim follows from a chain of equalities (or inequalities). The key step rewrites with standard identities for matrices, standard identities for finite indices, the hypothesis that  $\Phi.\text{effect} = \Psi.\text{effect}$  and the pointwise formula for the extensionality.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean](#)

```
theorem cpMap_one_ext_effect {n : Nat} {? ? : CPMMap n 1}
  (h : ?.effect = ?.effect) : ? = ? := by
  apply CPMMap.ext_apply
```

```

intro ?
have h? := CMap.trace_applyMat_eq_effect ? ?
have h? := CMap.trace_applyMat_eq_effect ? ?
ext i j
fin_cases i; fin_cases j
have ht? : Matrix.trace (? .applyMat ?) = ? .applyMat ? 0 0 := by
  simp [Matrix.trace, Fin.default_eq_zero]
have ht? : Matrix.trace (? .applyMat ?) = ? .applyMat ? 0 0 := by
  simp [Matrix.trace, Fin.default_eq_zero]
calc
  ? .applyMat ? 0 0 = Matrix.trace (? .applyMat ?) := ht?.symm
  _ = Matrix.trace (? .effect * ?) := h?
  _ = Matrix.trace (? .effect * ?) := by rw [h]
  _ = Matrix.trace (? .applyMat ?) := h?.symm
  _ = ? .applyMat ? 0 0 := ht?

```

#### 4.4.1186 The normalized cup is invariant under the $A \leftrightarrow A$ swap

**Statement.** The normalized cup is invariant under the  $A \leftrightarrow A$  swap. Formally: `Superoperator.comp (normalizedCup A hA) (Superoperator.tensorSwap A A) = normalizedCup A hA`.

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the definition of the tensor swap, the effect of precomposing an effect with a basis equivalence, the pointwise formula for the normalized cup of the effect and the definition of the tensor product swap equivalence.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```

theorem normalizedCup_comp_swap {A : Nat} (hA : 0 < A) :
  Superoperator.comp (normalizedCup A hA) (Superoperator.tensorSwap A A) =
    normalizedCup A hA := by
  apply Superoperator.ext
  apply cpMap_one_ext_effect
  ext i j
  simp only [Superoperator.tensorSwap]
  rw [effect_comp_ofEquivalence]
  simp only [normalizedCup_effect_apply hA, Superoperator.tensorSwapEquiv]
  simp [Equiv.trans_apply, Equiv.prodComm_apply, Equiv.symm_apply_apply]
  ring_nf
  congr 1 <;> simp [eq_comm]

```

#### 4.4.1187 Sum of the finite index prod of a finite sum of the finite index prod

**Statement.** For a natural number  $A$ , an index  $f: \sum x : \text{Fin } (A * A), \sum y : \text{Fin } (A * A), f \times y$  equals an explicit expression in the finite index prod finite index equivalence.

**Proof.** The key step rewrites with standard identities for finite types and the fact that observational equality is transitive.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```

theorem sum_finProd_sum_finProd {A : Nat} (f : Fin (A * A) -> Fin (A * A) -> ?) :
  (? x : Fin (A * A), ? y : Fin (A * A), f x y) =
    ? a : Fin A, ? c : Fin A, ? b : Fin A, ? d : Fin A,
      f (finProdFinEquiv (a, c)) (finProdFinEquiv (b, d)) := by
let e := finProdFinEquiv (m := A) (n := A)
rw [ <- e.sum_comp (fun x => ? y : Fin (A * A), f x y)]
have hin :
  (? x : Fin A x Fin A, ? y : Fin (A * A), f (e x) y) =
    ? x : Fin A x Fin A, ? y : Fin A x Fin A, f (e x) (e y) :=
  Finset.sum_congr rfl fun x _ =>
    (e.sum_comp (fun y : Fin (A * A) => f (e x) y)).symm
refine hin.trans ?_
rw [Fintype.sum_prod_type]
conv_lhs =>
  enter [2, a, 2, c]
  rw [Fintype.sum_prod_type]

```

#### 4.4.1188 Cup name of a composite of a tensor product of the effect

**Statement.** For natural numbers  $A, n$ , a superoperator  $\Phi$ , indexes  $p, q, r, s$ : if  $0 < A$ , then an explicit expression in the composition, the normalized cup, the tensor product and the identity equals the product of  $A^{-1}$  and  $\Phi.cp.choi (s, q) (r, p)$ .

**Proof.** The key step rewrites with the underlying completely positive map of a composite for superoperators, the effect of post-composing with a map into 1, the underlying completely positive map of a tensor product for superoperators and the sum of the finite index prod of a finite sum of the finite index prod.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean](#)

```

theorem cupName_comp_tensor_effect {A n : Nat} (hA : 0 < A)
  (? : Superoperator n A) (p q : Fin n) (r s : Fin A) :
  (Superoperator.comp (normalizedCup A hA)
    (Superoperator.tensor ? (Superoperator.identity A))).cp.effect
    (finProdFinEquiv (p, r)) (finProdFinEquiv (q, s)) =
    ((A : ?)^-1 : ?) * ?.cp.choi (s, q) (r, p) := by
classical
rw [Superoperator.cp_comp, effect_comp_effect]
have hid : (Superoperator.identity A).cp = CMap.identity A := rfl
simp only [Superoperator.cp_tensor, hid]
rw [sum_finProd_sum_finProd (fun x y =>
  (normalizedCup A hA).cp.effect y x *
    (CMap.tensor ?.cp (CMap.identity A)).choi
      (x, finProdFinEquiv (q, s)) (y, finProdFinEquiv (p, r)))]
have hterm (a c b d : Fin A) :
  (normalizedCup A hA).cp.effect (finProdFinEquiv (b, d)) (finProdFinEquiv (a, c))
  *
    (CMap.tensor ?.cp (CMap.identity A)).choi
      (finProdFinEquiv (a, c), finProdFinEquiv (q, s))
      (finProdFinEquiv (b, d), finProdFinEquiv (p, r)) =
    ((A : ?)^-1 : ?) * (if b = d then (1 : ?) else 0) * (if a = c then 1 else 0)
  *
    (?.cp.choi (a, q) (b, p) * (if c = s then 1 else 0) * (if d = r then 1 else
0)) := by

```

```

rw [normalizedCup_effect_apply hA, choi_tensor_id_right]
simp only [Equiv.symm_apply_apply]
rw [Finset.sum_congr rfl fun a _ => Finset.sum_congr rfl fun c _ =>
  Finset.sum_congr rfl fun b _ => Finset.sum_congr rfl fun d _ => hterm a c b d]
have hfac :
  ((? a : Fin A, ? c : Fin A, ? b : Fin A, ? d : Fin A,
    ((A : ?)^-1 : ?) * (if b = d then (1 : ?) else 0) * (if a = c then 1 else
    0)) *
    (?.cp.choi (a, q) (b, p) * (if c = s then 1 else 0) * (if d = r then 1
    else 0))) =
    ((A : ?)^-1 : ?) *
    ? a : Fin A, ? c : Fin A, ? b : Fin A, ? d : Fin A,
    (if b = d then (1 : ?) else 0) * (if a = c then 1 else 0) *
    ?.cp.choi (a, q) (b, p) * (if c = s then 1 else 0) *
    (if d = r then 1 else 0) := by
  simp only [mul_assoc, Finset.mul_sum]
rw [hfac, sum_me_indicators]

```

#### 4.4.1189 Pointwise formula for the cup name of the effect

**Statement.** Cup-name effect at flat indices is  $(1/A) \cdot \Phi.\text{choi}$  (index-transposed). Formally:  $(\text{cupName } hA \ \Phi).\text{cp.effect } (\text{finProdFinEquiv } (p, r)) (\text{finProdFinEquiv } (q, s)) = A^{-1} \cdot \Phi.\text{cp.choi } (s, q) (r, p)$ .

**Proof.** The key step rewrites with the definition of the cup name, the fact that composition for superoperators is associative, the fact that the normalized cup is invariant under the  $A \leftrightarrow A$  swap and the cup name of a composite of a tensor product of the effect.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean](#)

```

theorem cupName_effect_apply {A n : Nat} (hA : 0 < A)
  (? : Superoperator n A) (p q : Fin n) (r s : Fin A) :
  (cupName hA ?).cp.effect
    (finProdFinEquiv (p, r)) (finProdFinEquiv (q, s)) =
    ((A : ?)^-1 : ?) * ?.cp.choi (s, q) (r, p) := by
  simp only [cupName]
  rw [Superoperator.comp_assoc, normalizedCup_comp_swap hA,
    cupName_comp_tensor_effect]

```

#### 4.4.1190 Cup name CP of the cup name

**Statement.** Snake at Choi level: reshape of the cup-name recovers  $(1/A) \cdot \Phi.\text{choi}$ . Formally:  $(\text{cupNameCP } (\text{cupName } hA \ \Phi)).\text{choi} = A^{-1} \cdot \Phi.\text{cp.choi}$ .

**Proof.** By case analysis on  $p$ . For a construction, the claim is checked directly. The key step rewrites with the definition of the cup name CP, the pointwise formula for the effect as Choi, the pointwise formula for the cup name of the effect and standard identities for matrices.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean](#)

```

theorem cupNameCP_cupName {A n : Nat} (hA : 0 < A) (? : Superoperator n A) :
  (cupNameCP (cupName hA ?)).choi =
    (A : ?)^-1 * ?.cp.choi := by
  ext p q
  cases p with | mk a i =>
  cases q with | mk b j =>
  simp only [cupNameCP, effectAsChoi_apply]
  rw [cupName_effect_apply hA]
  -- `(A:?)^-1 : ?) * z = (A:?)^-1 * z` under the ?-action on ?.
  simp [Matrix.smul_apply, Algebra.smul_def]

```

#### 4.4.1191 Recover a CP map by scaling the cup-name Choi reshape by A

**Definition.** Recover a CP map by scaling the cup-name Choi reshape by A.

**Construction.** Defined to be the scale nonnegativity of A, the transport along an equality nonnegativity of A, the cup name CP of  $\chi$ .

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean](#)

```

noncomputable def recoverCP {A : Nat} (_hA : 0 < A) {n : Nat}
  (chi : Superoperator (n * A) 1) : CPMMap n A :=
  CPMMap.scaleNonneg (A : ?) (Nat.cast_nonneg A) (cupNameCP chi)

```

#### 4.4.1192 Recover CP of the Choi matrix

**Statement.** For natural numbers A, n, a superoperator  $\chi$ : if  $0 < A$ , then  $(\text{recoverCP } hA \ \chi).choi = A \cdot (\text{cupNameCP } \chi).choi$ .

**Proof.** By definition. Unfolding the Choi matrix turns the left-hand side,  $(\text{recoverCP } hA \ \chi).choi$ , into the right-hand side,  $(\text{cupNameCP } \chi).choi$  scaled by A; the two sides are the same term.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean](#)

```

theorem recoverCP_choi {A n : Nat} (hA : 0 < A) (chi : Superoperator (n * A) 1) :
  (recoverCP hA chi).choi = (A : ?) * (cupNameCP chi).choi :=
  rfl

```

#### 4.4.1193 Retraction of the cup-name reshape: recover CP

**Statement.** Retraction of the cup-name reshape:  $\text{recoverCP } (\text{cupName } \Phi) = \Phi.cp$ . Formally:  $\text{recoverCP } hA (\text{cupName } hA \ \Phi) = \Phi.cp$ .

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the cup name CP of the cup name, the usual algebraic identities and the extensionality for completely positive maps.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean](#)



```

theorem recoverCP_cupName {A n : Nat} (hA : 0 < A) (? : Superoperator n A) :
  recoverCP hA (cupName hA ?) = ?.cp := by
  apply CMap.ext
  change (A : ?) * (cupNameCP (cupName hA ?)).choi = ?.cp.choi
  rw [cupNameCP_cupName hA]
  have hA0 : (A : ?) != 0 := Nat.cast_ne_zero.mpr (Nat.pos_iff_ne_zero.mp hA)
  -- `(A:?) * ((A:?)^-1 * M) = M`
  rw [smul_smul, mul_inv_cancel_0 hA0, one_smul]

```

#### 4.4.1194 Fiberwise evaluation candidate: recover from the unit's cup-name probe

**Definition.** Fiberwise evaluation candidate: recover from the unit's cup-name probe.

**Construction.** Defined to be the recover CP of hA and the application of Superoperator.identity n and normalizedCupProbe A hA.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean](#)

```

noncomputable def evaluationFiber {A n : Nat} (hA : 0 < A)
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier) :
  CMap n A :=
  recoverCP hA (F.app (Superoperator.identity n) (normalizedCupProbe A hA))

```

#### 4.4.1195 Retraction on the image of the unit (Choi level)

**Statement.** Retraction on the image of the unit (Choi level). Formally:  $\text{evaluationFiber } hA \ ((\text{DayNegation.unit } (\text{representable } A)).\text{app } n \ \Phi) = \Phi.\text{cp}$ .

**Proof.** The key step rewrites with the definition of the evaluation fiber, the fact that unit evaluation at the normalized-cup probe is the cup-name and the retraction of the cup-name reshape: recover CP.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean](#)

```

theorem evaluationFiber_unit {A n : Nat} (hA : 0 < A) (? : Superoperator n A) :
  evaluationFiber hA ((DayNegation.unit (representable A)).app n ?) = ?.cp := by
  simp only [evaluationFiber]
  rw [unit_app_normalizedCupProbe, recoverCP_cupName]

```

#### 4.4.1196 Package the recovered CP map as a superoperator on the unit image

**Definition.** Package the recovered CP map as a superoperator on the unit image.

**Construction.** Constructed by supplying each component: underlying completely positive map and trace nonincreasing. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean](#)

```

noncomputable def evaluationFiberSO {A n : Nat} (hA : 0 < A)
  (? : Superoperator n A) : Superoperator n A where

```

```

cp := evaluationFiber hA ((DayNegation.unit (representable A)).app n ?)
trace_nonincreasing := by
  rw [evaluationFiber_unit hA]
  exact ?.trace_nonincreasing

```

#### 4.4.1197 Retraction evaluation of `id` on fibers (via cup-name snake)

**Statement.** **Retraction**  $\text{evaluation} \circ \text{unit} = \text{id}$  on fibers (via cup-name snake). Formally:  $\text{evaluationFiberSO } hA \ \Phi = \Phi$ .

**Proof.** Both sides are compared pointwise (by extensionality). It follows from the extensionality for superoperators and the retraction on the image of the unit (Choi level).

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean](#)

```

theorem evaluation_comp_unit_fiber {A n : Nat} (hA : 0 < A)
  (? : Superoperator n A) :
  evaluationFiberSO hA ? = ? := by
  apply Superoperator.ext
  exact evaluationFiber_unit hA ?

/! ### Obstruction to naive total `Hom` via `recoverCP` -/

```

#### 4.4.1198 Reshape of the identity effect is the identity Choi matrix

**Statement.** Reshape of the identity effect is the identity Choi matrix.

**Proof.** Both sides are compared pointwise (by extensionality). The argument splits on the relevant condition. The goal is simplified using the pointwise formula for the effect as Choi, standard identities for matrices and the extensionality for bilinear maps.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean](#)

```

theorem effectAsChoi_one {A n : Nat} :
  effectAsChoi (A := A) (n := n) (1 : Matrix (Fin (n * A)) (Fin (n * A)) ?) =
  (1 : Matrix (Fin A x Fin n) (Fin A x Fin n) ?) := by
  ext p q
  simp only [effectAsChoi_apply, Matrix.one_apply]
  by_cases h : finProdFinEquiv (q.2, q.1) = finProdFinEquiv (p.2, p.1)
  * have hpq : p = q := by
    have := (finProdFinEquiv (m := n) (n := A)).injective h
    apply Prod.ext <=> simp_all [Prod.mk.injEq]
    simp [h, hpq]
  * have hpq : p != q := by
    intro hpq; apply h; simp [hpq]
    simp [h, hpq]

```

#### 4.4.1199 Matrix-level obstruction: $A^2 \bullet I \not\leq I$ for $A > 1$

**Statement.** Matrix-level obstruction:  $A^2 \bullet I \not\leq I$  for  $A > 1$ . Formally:  $\neg (A \star A \bullet (1 : \text{Matrix} (\text{Fin } A) (\text{Fin } A) \mathbb{C}) \leq (1 : \text{Matrix} (\text{Fin } A) (\text{Fin } A) \mathbb{C}))$ .

**Proof.** Both sides are compared pointwise (by extensionality). The argument splits on the relevant condition. The key step rewrites with standard identities for matrices and the usual algebraic identities.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean](#)

```
theorem smul_one_not_le_one {A : Nat} (hA : 1 < A) :
  not (((A : ?) * A : ?) * (1 : Matrix (Fin A) (Fin A) ?) <=
    (1 : Matrix (Fin A) (Fin A) ?)) := by
  intro hle
  have hpsd := Matrix.le_iff.mp hle
  let c : ? := (1 : ?) - ((A : ?) * A : ?)
  have hsub :
    (1 : Matrix (Fin A) (Fin A) ?) -
      ((A : ?) * A : ?) * (1 : Matrix (Fin A) (Fin A) ?) =
      c * (1 : Matrix (Fin A) (Fin A) ?) := by
    ext i j
    simp only [Matrix.sub_apply, Matrix.smul_apply, Matrix.one_apply, c, smul_eq_mul]
    split_ifs <=> ring
  rw [hsub] at hpsd
  let v : Fin A → ? := fun i => if i = <0, Nat.zero_lt_of_lt hA> then 1 else 0
  have hv := Matrix.PosSemidef.dotProduct_mulVec_nonneg hpsd v
  have hv' : star v ?? (c * (1 : Matrix (Fin A) (Fin A) ?)) *? v = c := by
    simp only [Matrix.smul_mulVec, Matrix.one_mulVec, dotProduct, Pi.smul_apply,
      smul_eq_mul, v]
  rw [Finset.sum_eq_single <0, Nat.zero_lt_of_lt hA>] <=> intros <=> simp_all
  have hre : c.re < 0 := by
    have : (1 : ?) < (A : ?) * A := by
      nlinarith [show (1 : ?) < A from Nat.one_lt_cast.mpr hA]
    simp only [c, Complex.sub_re, Complex.one_re]
    -- `((A:?) * A:?).re = A * A`
    have hr : (((A : ?) * A : ?)).re = (A : ?) * A := by
      simp
    rw [hr]
    linarith
  have hvre : 0 <= c.re := by
    rw [hv'] at hv
    exact (RCLike.nonneg_iff (K := ?)).mp hv |>.1
  exact not_le.mpr hre hvre
```

#### 4.4.1200 Recover CP of the complete discard $I_{\{A^2\}}$ has Choi matrix $A \bullet I$

**Statement.** `recoverCP` of the complete discard  $I_{\{A^2\}}$  has Choi matrix  $A \bullet I$ .

**Proof.** The goal is simplified using the `recover CP` of the Choi matrix, the definition of the cup name `CP`, the map determined by an effect of the effect and the fact that reshape of the identity effect is the identity Choi matrix.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean](#)

```

theorem recoverCP_discard_choi {A : Nat} (hA : 0 < A) :
  (recoverCP hA
    (ofEffect (1 : Matrix (Fin (A * A)) (Fin (A * A)) ?)
      Matrix.PosSemidef.one le_rfl)).choi =
    (A : ?) * (1 : Matrix (Fin A x Fin A) (Fin A x Fin A) ?) := by
  simp only [recoverCP_choi, cupNameCP, ofEffect_effect, effectAsChoi_one]

```

#### 4.4.1201 Input effect of recover CP is $A^2 \cdot I$

**Statement.** Input effect of `recoverCP`  $I_{\{A^2\}}$  is  $A^2 \cdot I$ .

**Proof.** Both sides are compared pointwise (by extensionality). The argument splits on the relevant condition. An equation between variables is used to substitute one for the other. The goal is simplified using the definition of the cup name CP, the map determined by an effect of the effect, the fact that reshape of the identity effect is the identity Choi matrix and the definition of the recover CP.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean](#)

```

theorem recoverCP_discard_effect {A : Nat} (hA : 0 < A) :
  (recoverCP hA
    (ofEffect (1 : Matrix (Fin (A * A)) (Fin (A * A)) ?)
      Matrix.PosSemidef.one le_rfl)).effect =
    ((A : ?) * A : ?) * (1 : Matrix (Fin A) (Fin A) ?) := by
  have hC :
    cupNameCP (ofEffect (1 : Matrix (Fin (A * A)) (Fin (A * A)) ?)
      Matrix.PosSemidef.one le_rfl) =
      <1, Matrix.PosSemidef.one> := by
    apply CMap.ext
    simp [cupNameCP, ofEffect_effect, effectAsChoi_one]
  simp only [recoverCP, hC]
  ext i j
  simp only [CMap.effect, CMap.choi_scaleNonneg, Matrix.smul_apply, Matrix.one_apply]
  by_cases hij : i = j
  * subst j
    simp [Finset.sum_const, nsmul_eq_mul, smul_eq_mul]
    try ring
  * have : not j = i := Ne.symm hij
    simp [hij, this]

```

#### 4.4.1202 Obstruction: recover CP of discard $I_{\{A^2\}}$ is not TNI for $A > 1$ (effect $A^2 \cdot I \not\leq I$ )

**Statement. Obstruction:** `recoverCP` of discard  $I_{\{A^2\}}$  is not TNI for  $A > 1$  (effect  $A^2 \cdot I \not\leq I$ ). So cup-name reshape cannot be a total Hom on *all* effects — only on cup-names (`evaluation_comp_unit_fiber`).

**Proof.** The key step rewrites with the fact that intrinsic trace non-increase is exactly the input-effect bound, the fact that input effect of recover CP is  $A^2 \cdot I$  and the matrix-level obstruction:  $A^2 \cdot I \not\leq I$  for  $A > 1$ .

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean](#)

```

theorem recoverCP_discard_not_tni {A : Nat} (hA : 1 < A) :
  not TraceNonincreasing
    (recoverCP (Nat.zero_lt_of_lt hA)
      (ofEffect (1 : Matrix (Fin (A * A)) (Fin (A * A)) ?)
        Matrix.PosSemidef.one le_rfl)) := by
  rw [traceNonincreasing_iff_effect_le_one]
  intro hle
  rw [recoverCP_discard_effect (Nat.zero_lt_of_lt hA)] at hle
  exact smul_one_not_le_one hA hle

/-! ### Cup-probe non-generation for `A > 1` -/

```

#### 4.4.1203 Cup-probe non-generation for $A > 1$

**Statement.** ### Cup-probe non-generation for  $A > 1$ . Formally:  $(\text{dualFiberBilinear } A \ q \ \chi) . \text{app } (\text{Superoperator.identity } q) (\text{Superoperator.identity } A) = \chi$ .

**Proof.** The key step rewrites with the tensor product of an identity and the composition of the identity for superoperators.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean](#)

```

theorem dualFiberBilinear_app_id_id {A q : Nat}
  (chi : Superoperator (q * A) 1) :
  (dualFiberBilinear A q chi).app
    (Superoperator.identity q) (Superoperator.identity A) = chi := by
  change Superoperator.comp chi
    (Superoperator.tensor (Superoperator.identity q) (Superoperator.identity A)) =
  chi
  rw [Superoperator.tensor_identity, Superoperator.comp_identity]

```

#### 4.4.1204 Injectivity of the dual fiber bilinear map

**Statement.** For natural numbers  $A, q$ :  $\text{dualFiberBilinear } A \ q$  is injective.

**Proof.** It follows from the cup-probe non-generation for  $A > 1$ .

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean](#)

```

theorem dualFiberBilinear_injective {A q : Nat} :
  Function.Injective (dualFiberBilinear A q) := by
  intro chi_1 chi_2 h
  have :=
    congrArg
      (fun b : ((DayNegation.neg (representable A)).obj q).Carrier =>
        b.app (Superoperator.identity q) (Superoperator.identity A)) h
  exact (dualFiberBilinear_app_id_id chi_1).symm.trans
    (this.trans (dualFiberBilinear_app_id_id chi_2))

```

#### 4.4.1205 Day action on a dual-fiber effect is right tensor-precomposition

**Statement.** Day action on a dual-fiber effect is right tensor-precomposition.

**Proof.** Both sides are compared pointwise (by extensionality). The claim follows from a chain of equalities (or inequalities). The key step rewrites with the identity of a composite for superoperators, the fact that parallel composition is a bifunctor: it preserves sequential composition in both arguments and the extensionality for bilinear maps.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```
theorem act_dualFiberBilinear {A m n : Nat}
  (e : Superoperator (n * A) 1) (f : Superoperator m n) :
  (DayNegation.neg (representable A)).act (dualFiberBilinear A n e) f =
    dualFiberBilinear A m
      (Superoperator.comp e
        (Superoperator.tensor f (Superoperator.identity A))) := by
  apply Bilinear.ext
  intro p q r s
  change Superoperator p m at r
  change Superoperator q A at s
  change
    Superoperator.comp e
      (Superoperator.tensor (Superoperator.comp f r) s) =
    Superoperator.comp
      (Superoperator.comp e
        (Superoperator.tensor f (Superoperator.identity A)))
      (Superoperator.tensor r s)
  calc
    Superoperator.comp e (Superoperator.tensor (Superoperator.comp f r) s) =
      Superoperator.comp e
        (Superoperator.tensor (Superoperator.comp f r)
          (Superoperator.comp (Superoperator.identity A) s)) := by
        rw [Superoperator.identity_comp]
    _ = Superoperator.comp e
      (Superoperator.comp
        (Superoperator.tensor f (Superoperator.identity A))
        (Superoperator.tensor r s)) := by
        rw [ <- Superoperator.tensor_comp ]
    _ = Superoperator.comp
      (Superoperator.comp e
        (Superoperator.tensor f (Superoperator.identity A)))
      (Superoperator.tensor r s) :=
      Superoperator.comp_assoc _ _ _
```

#### 4.4.1206 Formula for the normalized cup probe of the act

**Statement.** Probe action is cup-precomposition:  $\text{act probe } f = \text{dualFiberBilinear}(\text{cup} \circ (f \otimes \text{id}))$ .

**Proof.** Both sides are compared pointwise (by extensionality). The claim follows from a chain of equalities (or inequalities). The key step rewrites with the identity of a composite for superoperators, the fact that parallel composition is a bifunctor: it preserves sequential composition in both arguments and the extensionality for bilinear maps.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```

theorem normalizedCupProbe_act_eq {A q : Nat} (hA : 0 < A)
  (f : Superoperator q A) :
  (DayNegation.neg (representable A)).act (normalizedCupProbe A hA) f =
    dualFiberBilinear A q
      (Superoperator.comp (normalizedCup A hA)
        (Superoperator.tensor f (Superoperator.identity A))) := by
  apply Bilinear.ext
  intro p q' r s
  change Superoperator p q at r
  change Superoperator q' A at s
  change
    Superoperator.comp (normalizedCup A hA)
      (Superoperator.tensor (Superoperator.comp f r) s) =
    Superoperator.comp
      (Superoperator.comp (normalizedCup A hA)
        (Superoperator.tensor f (Superoperator.identity A)))
      (Superoperator.tensor r s)
  calc
    Superoperator.comp (normalizedCup A hA)
      (Superoperator.tensor (Superoperator.comp f r) s) =
    Superoperator.comp (normalizedCup A hA)
      (Superoperator.tensor (Superoperator.comp f r)
        (Superoperator.comp (Superoperator.identity A) s)) := by
      rw [Superoperator.identity_comp]
    _ = Superoperator.comp (normalizedCup A hA)
      (Superoperator.comp
        (Superoperator.tensor f (Superoperator.identity A))
        (Superoperator.tensor r s)) := by
      rw [← Superoperator.tensor_comp]
    _ = Superoperator.comp
      (Superoperator.comp (normalizedCup A hA)
        (Superoperator.tensor f (Superoperator.identity A)))
      (Superoperator.tensor r s) :=
      Superoperator.comp_assoc _ _ _

```

**4.4.1207 Swap-invariance of the cup collapses  $\text{cup} \circ (f \otimes \text{id})$  to cup name of  $f$**

**Statement.** Swap-invariance of the cup collapses  $\text{cup} \circ (f \otimes \text{id})$  to  $\text{cupName } f$ . Formally:  
 $\text{Superoperator.comp (normalizedCup A hA) (Superoperator.tensor f (Superoperator.identity A))} = \text{cupName hA } f$ .

**Proof.** The key step rewrites with the definition of the cup name, the fact that composition for superoperators is associative and the fact that the normalized cup is invariant under the  $A \leftrightarrow A$  swap.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean`

```

theorem cup_tensor_eq_cupName {A q : Nat} (hA : 0 < A)
  (f : Superoperator q A) :
  Superoperator.comp (normalizedCup A hA)
    (Superoperator.tensor f (Superoperator.identity A)) =

```

```

    cupName hA f := by
    simp only [cupName]
    rw [Superoperator.comp_assoc, normalizedCup_comp_swap hA]

```

#### 4.4.1208 The normalized cup probe of the act equals a cup name

**Statement.** For natural numbers  $A$ ,  $q$ , a superoperator  $f$ : if  $0 < A$ , then  $(\text{DayNegation.neg } (\text{representable } A)).\text{act } (\text{normalizedCupProbe } A \text{ hA}) f$  equals the dual fiber bilinear map of  $A$ ,  $q$ , the cup name of  $hA$  and  $f$ .

**Proof.** The key step rewrites with the formula for the normalized cup probe of the act and the swap-invariance of the cup collapses  $\text{cup} \circ (f \otimes \text{id})$  to cup name of  $f$ .

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean](#)

```

theorem normalizedCupProbe_act_eq_cupName {A q : Nat} (hA : 0 < A)
  (f : Superoperator q A) :
  (DayNegation.neg (representable A)).act (normalizedCupProbe A hA) f =
    dualFiberBilinear A q (cupName hA f) := by
  rw [normalizedCupProbe_act_eq, cup_tensor_eq_cupName]

```

#### 4.4.1209 Complete discard effect on $A^2$ as a dual-fiber witness

**Definition.** Complete discard effect on  $A^2$  as a dual-fiber witness.

**Construction.** Defined to be the map determined by an effect of  $1 : \text{Matrix } (\text{Fin } (A * A))$   $(\text{Fin } (A * A)) \mathbb{C}$ , the one,  $\text{le\_rfl}$ .

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean](#)

```

noncomputable def discardEffectAA (A : Nat) : Superoperator (A * A) 1 :=
  ofEffect (1 : Matrix (Fin (A * A)) (Fin (A * A)) ?)
    Matrix.PosSemidef.one le_rfl

```

#### 4.4.1210 The cup name differs from a discard

**Statement.** For a natural number  $A$ , a superoperator  $f$ : if  $1 < A$ , then  $\text{cupName } (\text{Nat.zero\_lt\_of\_lt } hA) f \neq \text{discardEffectAA } A$ .

**Proof.** The key step rewrites with the retraction of the cup-name reshape: recover CP and the fact that **Obstruction:** recover CP of discard  $\mathbb{I}_{\{A^2\}}$  is not TNI for  $A > 1$  (effect  $A^2 \mathbb{I} \not\leq \mathbb{I}$ ).

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean](#)

```

theorem cupName_ne_discard {A : Nat} (hA : 1 < A)
  (f : Superoperator A A) :
  cupName (Nat.zero_lt_of_lt hA) f != discardEffectAA A := by
  intro hf
  have hrec := congrArg (recoverCP (Nat.zero_lt_of_lt hA)) hf

```



```

rw [recoverCP_cupName] at hrec
have hTNI : TraceNonincreasing (recoverCP (Nat.zero_lt_of_lt hA) (discardEffectAA A)
) := by
  rw [ <- hrec]
  exact f.trace_nonincreasing
exact recoverCP_discard_not_tni hA hTNI

```

#### 4.4.1211 Cup-names do not exhaust $\text{Superoperator}(A^2, 1)$ for $A > 1$

**Statement.** Cup-names do not exhaust  $\text{Superoperator}(A^2, 1)$  for  $A > 1$ . Formally:  $\neg \text{Surjective} (\text{cupName } (\text{Nat.zero\_lt\_of\_lt } hA) \ (n := A))$ .

**Proof.** The hypotheses are unpacked into their constituent data. It follows from the cup name differs from a discard.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean](#)

```

theorem cupName_not_surjective {A : Nat} (hA : 1 < A) :
  not Function.Surjective (cupName (Nat.zero_lt_of_lt hA) (n := A)) := by
  intro hsurj
  obtain <f, hf> := hsurj (discardEffectAA A)
  exact cupName_ne_discard hA f hf

```

#### 4.4.1212 Non-generation: the Day-action orbit of normalized cup probe is a proper subset of $\neg y(A)_A$ for $A > 1$

**Statement. Non-generation:** the Day-action orbit of `normalizedCupProbe` is a proper subset of  $\neg y(A)_A$  for  $A > 1$ . Witness: `dualFiberBilinear discardEffectAA`.

**Proof.** Each component of the claim is established separately. It follows from the cup name differs from a discard.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean](#)

```

theorem normalizedCupProbe_not_generates {A : Nat} (hA : 1 < A) :
  exists chi : ((DayNegation.neg (representable A)).obj A).Carrier,
    forall f : Superoperator A A,
      (DayNegation.neg (representable A)).act
        (normalizedCupProbe A (Nat.zero_lt_of_lt hA)) f != chi := by
  refine <dualFiberBilinear A A (discardEffectAA A), fun f hf => ?_>
  have hchi : cupName (Nat.zero_lt_of_lt hA) f = discardEffectAA A :=
    dualFiberBilinear_injective
    ((normalizedCupProbe_act_eq_cupName (Nat.zero_lt_of_lt hA) f).symm.trans hf)
  exact cupName_ne_discard hA f hchi

```

#### 4.4.1213 $N=1$ unit surjectivity (pairing lift)

**Statement.**  $\text{### } n=1$  unit surjectivity (pairing lift). Formally:  $\text{Surjective } (\text{effectPack } A)$ .

**Proof.** The claim follows from a chain of equalities (or inequalities). Each component of the claim is established separately. The key step rewrites with the components of the composition, the components of the identity, the definition of the dual fiber bilinear map and the fact that composition for superoperators is associative.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean](#)

```
theorem effectPack_surjective (A : Nat) :
  Function.Surjective (effectPack A) := by
  intro b
  set chi : Superoperator (1 * A) 1 :=
    b.app (Superoperator.identity 1) (Superoperator.identity A)
  refine <Superoperator.comp chi (Superoperator.tensorLeftUnitInv A), ?_>
  have hiso :
    (dayInternalHomRepresentableIso A dayTensorUnit).inv.app 1
      ((dayInternalHomRepresentableIso A dayTensorUnit).hom.app 1 b) = b := by
    simpa [Hom.comp_app, Hom.id_app] using
      congrArg (fun f : Hom _ _ => f.app 1 b)
      (dayInternalHomRepresentableIso A dayTensorUnit).inv_hom
  have hhom : (dayInternalHomRepresentableIso A dayTensorUnit).hom.app 1 b = chi :=
    rfl
  have hb : dualFiberBilinear A 1 chi = b := by
    simpa [dualFiberBilinear, hhom] using hiso
  have hchi : Superoperator.comp
    (Superoperator.comp chi (Superoperator.tensorLeftUnitInv A))
    (Superoperator.tensorLeftUnitInv A) = chi := by
    rw [ <- Superoperator.comp_assoc, Superoperator.tensorLeftUnitInv_inv_hom,
      Superoperator.comp_identity]
  calc effectPack A (Superoperator.comp chi (Superoperator.tensorLeftUnitInv A))
    = dualFiberBilinear A 1
      (Superoperator.comp
        (Superoperator.comp chi (Superoperator.tensorLeftUnitInv A))
        (Superoperator.tensorLeftUnitInv A)) := rfl
  _ = dualFiberBilinear A 1 chi := by rw [hchi]
  _ = b := hb
```

#### 4.4.1214 Surjectivity of the dual fiber bilinear map

**Statement.** For natural numbers  $A, q$ :  $\text{dualFiberBilinear } A \ q$  is surjective.

**Proof.** Each component of the claim is established separately. The goal is simplified using the components of the composition, the components of the identity and the definition of the dual fiber bilinear map.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean](#)

```
theorem dualFiberBilinear_surjective (A q : Nat) :
  Function.Surjective (dualFiberBilinear A q) := by
  intro b
  set chi : Superoperator (q * A) 1 :=
    b.app (Superoperator.identity q) (Superoperator.identity A)
  refine <chi, ?_>
  have hiso :
```

```

      (dayInternalHomRepresentableIso A dayTensorUnit).inv.app q
      ((dayInternalHomRepresentableIso A dayTensorUnit).hom.app q b) = b := by
    simp [Hom.comp_app, Hom.id_app] using
      congrArg (fun f : Hom _ _ => f.app q b)
      (dayInternalHomRepresentableIso A dayTensorUnit).inv_hom
    have hhom : (dayInternalHomRepresentableIso A dayTensorUnit).hom.app q b = chi :=
      rfl
    simp [dualFiberBilinear, hhom] using hiso

```

#### 4.4.1215 Double dual of the application of the identity

**Statement.** For natural numbers  $A, n, p, q$ , a superoperator  $r$ : the application of  $r$  and  $b$  equals the act of the application of `Superoperator.identity n` and  $b$  and the tensor product of  $r$  and `Superoperator.identity q`.

**Proof.** The goal is simplified using the identity of a composite for superoperators and the definition of the negation.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean](#)

```

theorem doubleDual_app_identity {A n p q : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier)
  (r : Superoperator p n)
  (b : ((DayNegation.neg (representable A)).obj q).Carrier) :
  F.app r b =
    dayTensorUnit.act (F.app (Superoperator.identity n) b)
    (Superoperator.tensor r (Superoperator.identity q)) := by
  have hF := F.naturality (Superoperator.identity n) b r (Superoperator.identity q)
  simp [Superoperator.identity_comp,
    (DayNegation.neg (representable A)).act_id] using hF

```

#### 4.4.1216 The double dual respects application of the identity

**Statement.** For natural numbers  $A, n$ : if for every  $q$ ,  $(b, F.app (Superoperator.identity n) b = G.app (Superoperator.identity n) b)$ , then  $F = G$ .

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the double dual of the application of the identity, the hypothesis that for every  $q$ ,  $(b, F.app (Superoperator.identity n) b = G.app (Superoperator.identity n) b)$  and the extensionality for bilinear maps.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean](#)

```

theorem doubleDual_eq_of_app_id {A n : Nat}
  (F G : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier)
  (h : forall q (b : ((DayNegation.neg (representable A)).obj q).Carrier),
    F.app (Superoperator.identity n) b = G.app (Superoperator.identity n) b) :
  F = G := by
  apply Bilinear.ext
  intro p q r b
  rw [doubleDual_app_identity F r b, doubleDual_app_identity G r b, h]

```

#### 4.4.1217 The pairing equals the imp of the application of the fiber of one

**Statement.** For natural numbers  $A, n$ , a superoperator  $\Phi$ : if for every  $e$ , `doubleDualEffectPairing F e = effectPrecompose  $\Phi$  e`, then the application of the identity on dimension  $n$  and  $b$  equals an explicit expression in the unit, the representable module and the identity.

**Proof.** The hypotheses are unpacked into their constituent data. It follows from the fact that pairing agreement implies raw evaluation agrees on every effect pack.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean`

```
theorem pairing_eq_imp_app_fiber_one {A n : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier)
  (? : Superoperator n A)
  (ha : forall e : Superoperator A 1,
    doubleDualEffectPairing F e = effectPrecompose ? e)
  (b : ((DayNegation.neg (representable A)).obj 1).Carrier) :
  F.app (Superoperator.identity n) b =
    ((DayNegation.unit (representable A)).app n ?).app
      (Superoperator.identity n) b := by
obtain <e, rfl> := effectPack_surjective A b
exact pairing_eq_imp_app_effectPack F ? ha e
```

#### 4.4.1218 Double dual of the application of the act

**Statement.** For natural numbers  $A, n, q, q'$ , a superoperator  $g$ : the application of the identity on dimension  $n$  and `(DayNegation.neg (representable A)).act b g` equals the act of the application of `Superoperator.identity n` and  $b$  and the tensor product of `Superoperator.identity n` and  $g$ .

**Proof.** The goal is simplified using the composition of the identity for superoperators.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean`

```
theorem doubleDual_app_act {A n q q' : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier)
  (b : ((DayNegation.neg (representable A)).obj q).Carrier)
  (g : Superoperator q' q) :
  F.app (Superoperator.identity n)
    ((DayNegation.neg (representable A)).act b g) =
    dayTensorUnit.act (F.app (Superoperator.identity n) b)
      (Superoperator.tensor (Superoperator.identity n) g) := by
have hF := F.naturality (Superoperator.identity n) b
  (Superoperator.identity n) g
simp [Superoperator.comp_identity] using hF
```

#### 4.4.1219 The superoperator to one respects composition of the preparation

**Statement.** For a natural number  $k$ , superoperators  $\psi_1, \psi_2$ : if for every  $\sigma$ , `Superoperator.comp  $\psi_1$   $\sigma$  = Superoperator.comp  $\psi_2$   $\sigma$` , then  $\psi_1 = \psi_2$ .

**Proof.** Both sides are compared pointwise (by extensionality). The claim follows from a chain of equalities (or inequalities). The key step rewrites with standard identities for matrices, standard identities for complex numbers, the usual algebraic identities and the definition of the precomposition with an effect.

#### Lean 4 source `QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean`

```
theorem superoperator_to_one_eq_of_comp_prep {k : Nat}
  {psi_1 psi_2 : Superoperator k 1}
  (h : forall sigma : Superoperator 1 k,
    Superoperator.comp psi_1 sigma = Superoperator.comp psi_2 sigma) :
  psi_1 = psi_2 := by
  have heff : psi_1.cp.effect = psi_2.cp.effect := by
    refine matrix_eq_of_forall_effect_trace ?_
    intro E hpsd_hle
    set c : ? := max (Matrix.trace E).re 1
    have hc_pos : (0 : ?) < c :=
      lt_of_lt_of_le (by norm_num : (0 : ?) < 1) (le_max_right _ _)
    have hc0 : (0 : ?) <= c^-1 := inv_nonneg.mpr (le_of_lt hc_pos)
    set ? : Matrix (Fin k) (Fin k) ? := (c^-1 : ?) * E
    have h?psd : ?.PosSemidef := hpsd.smul hc0
    have h?tr : (Matrix.trace ?).re <= 1 := by
      have htre : (Matrix.trace ?).re = c^-1 * (Matrix.trace E).re := by
        simp only [?, Matrix.trace_smul, Complex.smul_re, smul_eq_mul]
      rw [htre]
      calc c^-1 * (Matrix.trace E).re
        <= c^-1 * c := mul_le_mul_of_nonneg_left (le_max_left _ _) hc0
        _ = 1 := inv_mul_cancel_0 (ne_of_gt hc_pos)
    set sigma := preparationOfDensity ? h?psd h?tr
    have h1 : bornScalar (Superoperator.comp psi_1 sigma) =
      Matrix.trace (psi_1.cp.effect * ?) := by
      calc bornScalar (Superoperator.comp psi_1 sigma)
        = Matrix.trace (psi_1.cp.effect * sigma.cp.applyMat 1) := by
          simp [effectPrecompose] using bornScalar_effectPrecompose sigma psi_1
        _ = Matrix.trace (psi_1.cp.effect * ?) := by
          rw [preparationOfDensity_applyMat_one]
    have h2 : bornScalar (Superoperator.comp psi_2 sigma) =
      Matrix.trace (psi_2.cp.effect * ?) := by
      calc bornScalar (Superoperator.comp psi_2 sigma)
        = Matrix.trace (psi_2.cp.effect * sigma.cp.applyMat 1) := by
          simp [effectPrecompose] using bornScalar_effectPrecompose sigma psi_2
        _ = Matrix.trace (psi_2.cp.effect * ?) := by
          rw [preparationOfDensity_applyMat_one]
    have h?trace : Matrix.trace (psi_1.cp.effect * ?) =
      Matrix.trace (psi_2.cp.effect * ?) := by
      rw [← h1, ← h2, h]
    have hE : E = (c : ?) * ? := by
      simp only [?]
      ext i j
      simp [Matrix.smul_apply]
      field_simp [ne_of_gt hc_pos]
    have hcyc (X Y : Matrix (Fin k) (Fin k) ?) :
      Matrix.trace (X * Y) = Matrix.trace (Y * X) := Matrix.trace_mul_comm _ _
    calc Matrix.trace (E * psi_1.cp.effect)
      = Matrix.trace (((c : ?) * ?) * psi_1.cp.effect) := by rw [hE]
      _ = (c : ?) * Matrix.trace (? * psi_1.cp.effect) := by
```

```

      simp [Matrix.trace_smul, Complex.real_smul]
    _ = (c : ?) * Matrix.trace (psi_1.cp.effect * ?) := by rw [hcyc]
    _ = (c : ?) * Matrix.trace (psi_2.cp.effect * ?) := by rw [h?trace]
    _ = (c : ?) * Matrix.trace (? * psi_2.cp.effect) := by rw [hcyc]
    _ = Matrix.trace (((c : ?) * ?) * psi_2.cp.effect) := by
      simp [Matrix.trace_smul, Complex.real_smul]
    _ = Matrix.trace (E * psi_2.cp.effect) := by rw [ <- hE]
  apply Superoperator.ext
  apply CPMat.trace_ext_apply
  intro ?
  have htr : Matrix.trace (psi_1.cp.applyMat ?) = Matrix.trace (psi_2.cp.applyMat ?)
    := by
      rw [CPMap.trace_applyMat_eq_effect, CPMat.trace_applyMat_eq_effect, heff]
  ext i j
  fin_cases i; fin_cases j
  simp [Matrix.trace, Fin.default_eq_zero] using htr

```

#### 4.4.1220 The superoperator of one of a product respects tensor product of the preparation

**Statement.** For a natural number  $q$ , superoperators  $\psi_1, \psi_2$ : if for every  $\sigma$ , the act of  $\psi_1$  and the tensor product of  $\text{Superoperator.identity } 1$  and  $\sigma$  equals the act of  $\psi_2$  and the tensor product of  $\text{Superoperator.identity } 1$  and  $\sigma$ , then  $\psi_1 = \psi_2$ .

**Proof.** The claim follows from a chain of equalities (or inequalities). The key step rewrites with the representable module of the act, the fact that composition for superoperators is associative, the fact that the tensor left unitor and its inverse compose to the identity and the composition of the identity for superoperators.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean](#)

```

theorem superoperator_one_mul_eq_of_tensor_prep {q : Nat}
  {psi_1 psi_2 : Superoperator (1 * q) 1}
  (h : forall sigma : Superoperator 1 q,
    dayTensorUnit.act psi_1
      (Superoperator.tensor (Superoperator.identity 1) sigma) =
      dayTensorUnit.act psi_2
        (Superoperator.tensor (Superoperator.identity 1) sigma)) :
  psi_1 = psi_2 := by
  have h' : forall sigma : Superoperator 1 q,
    Superoperator.comp psi_1
      (Superoperator.tensor (Superoperator.identity 1) sigma) =
      Superoperator.comp psi_2
        (Superoperator.tensor (Superoperator.identity 1) sigma) := by
    intro sigma
    simp [representable_act] using h sigma
  set phi_1 : Superoperator q 1 :=
    Superoperator.comp psi_1 (Superoperator.tensorLeftUnitorInv q)
  set phi_2 : Superoperator q 1 :=
    Superoperator.comp psi_2 (Superoperator.tensorLeftUnitorInv q)
  have hphi : forall sigma : Superoperator 1 q, Superoperator.comp phi_1 sigma =
    Superoperator.comp phi_2 sigma := by
    intro sigma
    have hnata := Superoperator.tensorLeftUnitorInv_naturality sigma

```

```

calc Superoperator.comp phi_1 sigma
  = Superoperator.comp psi_1
    (Superoperator.comp (Superoperator.tensorLeftUnitorInv q) sigma) := by
      simp only [phi_1, Superoperator.comp_assoc]
_ = Superoperator.comp psi_1
  (Superoperator.comp
    (Superoperator.tensor (Superoperator.identity 1) sigma)
    (Superoperator.tensorLeftUnitorInv 1)) := by
    rw [ <- hnata]
_ = Superoperator.comp
  (Superoperator.comp psi_1
    (Superoperator.tensor (Superoperator.identity 1) sigma))
  (Superoperator.tensorLeftUnitorInv 1) := Superoperator.comp_assoc _ _ _
_ = Superoperator.comp
  (Superoperator.comp psi_2
    (Superoperator.tensor (Superoperator.identity 1) sigma))
  (Superoperator.tensorLeftUnitorInv 1) := by rw [h']
_ = Superoperator.comp psi_2
  (Superoperator.comp
    (Superoperator.tensor (Superoperator.identity 1) sigma)
    (Superoperator.tensorLeftUnitorInv 1)) := (Superoperator.comp_assoc _ _
_) .symm
_ = Superoperator.comp psi_2
  (Superoperator.comp (Superoperator.tensorLeftUnitorInv q) sigma) := by
    rw [hnata]
_ = Superoperator.comp phi_2 sigma := by simp only [phi_2, Superoperator.
comp_assoc]
have hphieq : phi_1 = phi_2 := superoperator_to_one_eq_of_comp_prep hphi
have hrec (psi : Superoperator (1 * q) 1) :
  Superoperator.comp
    (Superoperator.comp psi (Superoperator.tensorLeftUnitorInv q))
    (Superoperator.tensorLeftUnitor q) = psi := by
    rw [ <- Superoperator.comp_assoc, Superoperator.tensorLeftUnitor_inv_hom,
      Superoperator.comp_identity]
calc psi_1 = Superoperator.comp phi_1 (Superoperator.tensorLeftUnitor q) := (hrec
psi_1).symm
_ = Superoperator.comp phi_2 (Superoperator.tensorLeftUnitor q) := by rw [hphieq]
_ = psi_2 := hrec psi_2

```

#### 4.4.1221 The Choi matrix tensor product identity left

**Statement.** For natural numbers  $n, q$ , a completely positive map  $\sigma$ , indexes  $u, v, i, j, b, a, c, d$ : an explicit expression in the tensor product, the identity and the finite index prod finite index equivalence equals the product of  $(\text{CPMap.identity } n).\text{choi } (u, b) (v, a)$  and  $\sigma.\text{choi } (i, c) (j, d)$ .

**Proof.** The key step rewrites with the Choi matrix of a tensor product for completely positive maps, standard identities for matrices, the definition of the Choi tensor product equivalence and standard identities for equivalences.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean](#)

```

theorem choi_tensor_id_left {n q : Nat} (sigma : CPMap 1 q)
  (u v : Fin n) (i j : Fin q) (b a : Fin n) (c d : Fin 1) :

```

```

(CMap.tensor (CMap.identity n) sigma).choi
  (finProdFinEquiv (u, i), finProdFinEquiv (b, c))
  (finProdFinEquiv (v, j), finProdFinEquiv (a, d)) =
  (CMap.identity n).choi (u, b) (v, a) * sigma.choi (i, c) (j, d) := by
rw [CMap.choi_tensor]
simp only [Matrix.reindex_apply, Matrix.submatrix_apply]
have h1 : (CMap.choiTensorEquiv n n 1 q).symm
  (finProdFinEquiv (u, i), finProdFinEquiv (b, c)) = ((u, b), (i, c)) := by
  dsimp [CMap.choiTensorEquiv]; simp only [Equiv.symm_apply_apply]
have h2 : (CMap.choiTensorEquiv n n 1 q).symm
  (finProdFinEquiv (v, j), finProdFinEquiv (a, d)) = ((v, a), (j, d)) := by
  dsimp [CMap.choiTensorEquiv]; simp only [Equiv.symm_apply_apply]
rw [h1, h2]; simp

```

#### 4.4.1222 The action on a matrix of one equals the Choi matrix

**Statement.** For a natural number  $q$ , a completely positive map  $\sigma$ , indexes  $i, j$ :  $\sigma.\text{applyMat } (1 : \text{Matrix } (\text{Fin } 1) (\text{Fin } 1) \mathbb{C}) \ i \ j = \sigma.\text{choi } (i, 0) (j, 0)$ .

**Proof.** The key step rewrites with the Choi matrix of the Kraus presentation and standard identities for matrices.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean](#)

```

theorem applyMat_one_eq_choi {q : Nat} (sigma : CMap 1 q) (i j : Fin q) :
  sigma.applyMat (1 : Matrix (Fin 1) (Fin 1) ?) i j = sigma.choi (i, 0) (j, 0) := by
  have h := KrausFamily.applyMat_apply (CMap.toKraus sigma) 1 i j
  change KrausFamily.applyMat (CMap.toKraus sigma) 1 i j = sigma.choi (i, 0) (j, 0)
  rw [h, CMap.choi_toKraus]
  simp [Matrix.one_apply]

```

#### 4.4.1223 The effect composition identity tensor product preparation

**Statement.** For natural numbers  $n, q$ , superoperators  $\psi, \sigma$ , indexes  $a, b$ : an explicit expression in the composition, the tensor product, the identity and the finite index prod finite index equivalence equals an explicit expression in the finite index prod finite index equivalence.

**Proof.** The key step rewrites with the underlying completely positive map of a composite for superoperators, the underlying completely positive map of a tensor product for superoperators, the effect of post-composing with a map into 1 and standard identities for equivalences.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean](#)

```

theorem effect_comp_id_tensor_prep {n q : Nat}
  (psi : Superoperator (n * q) 1) (sigma : Superoperator 1 q)
  (a b : Fin n) :
  (Superoperator.comp psi
    (Superoperator.tensor (Superoperator.identity n) sigma)).cp.effect
    (finProdFinEquiv (a, (0 : Fin 1))) (finProdFinEquiv (b, (0 : Fin 1))) =
    ? i : Fin q, ? j : Fin q,
    psi.cp.effect (finProdFinEquiv (a, j)) (finProdFinEquiv (b, i)) *

```



```

sigma.cp.applyMat (1 : Matrix (Fin 1) (Fin 1) ?) i j := by
classical
let e : Fin n x Fin q ? Fin (n * q) := finProdFinEquiv
let e1 : Fin n x Fin 1 ? Fin (n * 1) := finProdFinEquiv
have hcp :
  (Superoperator.comp psi
    (Superoperator.tensor (Superoperator.identity n) sigma)).cp =
    CPMMap.comp psi.cp (CPMap.tensor (CPMap.identity n) sigma.cp) := by
  rw [Superoperator.cp_comp, Superoperator.cp_tensor]; rfl
rw [hcp, effect_comp_effect]
have hS :
  (? u : Fin (n * q), ? v : Fin (n * q),
    psi.cp.effect v u *
      (CPMap.tensor (CPMap.identity n) sigma.cp).choi
        (u, e1 (b, 0)) (v, e1 (a, 0))) =
    ? x : Fin n, ? i : Fin q, ? y : Fin n, ? j : Fin q,
      psi.cp.effect (e (y, j)) (e (x, i)) *
        (CPMap.tensor (CPMap.identity n) sigma.cp).choi
          (e (x, i), e1 (b, 0)) (e (y, j), e1 (a, 0))) := by
  rw [ <- Equiv.sum_comp e (fun u => ? v : Fin (n * q),
    psi.cp.effect v u *
      (CPMap.tensor (CPMap.identity n) sigma.cp).choi
        (u, e1 (b, 0)) (v, e1 (a, 0))) ]
  rw [Fintype.sum_prod_type]
  refine Finset.sum_congr rfl fun x _ => Finset.sum_congr rfl fun i _ => ?_
  rw [ <- Equiv.sum_comp e (fun v =>
    psi.cp.effect v (e (x, i)) *
      (CPMap.tensor (CPMap.identity n) sigma.cp).choi
        (e (x, i), e1 (b, 0)) (v, e1 (a, 0))) ]
  rw [Fintype.sum_prod_type]
  rw [hS]
have hten (x y : Fin n) (i j : Fin q) :
  (CPMap.tensor (CPMap.identity n) sigma.cp).choi
    (e (x, i), e1 (b, 0)) (e (y, j), e1 (a, 0)) =
    (CPMap.identity n).choi (x, b) (y, a) * sigma.cp.choi (i, 0) (j, 0) :=
  choi_tensor_id_left sigma.cp x y i j b a 0 0
simp_rw [hten, choi_identity_pair]
rw [Finset.sum_eq_single b]
* refine Finset.sum_congr rfl fun i _ => ?_
  rw [Finset.sum_eq_single a]
  * simp only [reduceIte, one_mul]
    refine Finset.sum_congr rfl fun j _ => ?_
    exact (congrArg (fun z => psi.cp.effect (e (a, j)) (e (b, i)) * z)
      (applyMat_one_eq_choi sigma.cp i j)).symm
  * intro y _ hy
    simp only [hy, ite_false, mul_zero, zero_mul, Finset.sum_const_zero]
  * intro h; exact (h (Finset.mem_univ _)).elim
* intro x _ hx
  simp only [hx, ite_false, zero_mul, mul_zero, Finset.sum_const_zero]
* intro h; exact (h (Finset.mem_univ _)).elim

```

#### 4.4.1224 The matrix respects forall of the density matrix of the trace

**Statement.** For a natural number  $k$ , matrixes  $X, Y$ : if for every  $\rho$ ,  $\rho$  is positive semidefinite and  $(\text{tr } \rho) \cdot \text{re} \leq 1$ , then  $\text{tr } (\rho * X) = \text{tr } (\rho * Y)$ , then  $X = Y$ .

**Proof.** The claim follows from a chain of equalities (or inequalities). The key step rewrites with standard identities for matrices, standard identities for complex numbers and the usual algebraic identities.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean](#)

```
theorem matrix_eq_of_forall_density_trace {k : Nat}
  {X Y : Matrix (Fin k) (Fin k) ?}
  (h : forall (? : Matrix (Fin k) (Fin k) ?),
    ?.PosSemidef -> (Matrix.trace ?).re <= 1 ->
      Matrix.trace (? * X) = Matrix.trace (? * Y)) :
  X = Y := by
  refine matrix_eq_of_forall_effect_trace ?_
  intro E hpsd hle
  set c : ? := max (Matrix.trace E).re 1
  have hc_pos : (0 : ?) < c :=
    lt_of_lt_of_le (by norm_num : (0 : ?) < 1) (le_max_right _ _)
  have hc0 : (0 : ?) <= c^-1 := inv_nonneg.mpr (le_of_lt hc_pos)
  set ? : Matrix (Fin k) (Fin k) ? := (c^-1 : ?) * E
  have h?psd : ?.PosSemidef := hpsd.smul hc0
  have h?tr : (Matrix.trace ?).re <= 1 := by
    have htre : (Matrix.trace ?).re = c^-1 * (Matrix.trace E).re := by
      simp only [?, Matrix.trace_smul, Complex.smul_re, smul_eq_mul]
    rw [htre]
    calc c^-1 * (Matrix.trace E).re
      <= c^-1 * c := mul_le_mul_of_nonneg_left (le_max_left _ _) hc0
      _ = 1 := inv_mul_cancel_0 (ne_of_gt hc_pos)
  have h? := h ? h?psd h?tr
  have hE? : E = (c : ?) * ? := by
    simp only [?, smul_smul]
    rw [mul_inv_cancel_0 (ne_of_gt hc_pos), one_smul]
  have hXE : Matrix.trace (E * X) = (c : ?) * Matrix.trace (? * X) := by
    rw [hE?, Matrix.smul_mul, Matrix.trace_smul, Complex.real_smul]
  have hYE : Matrix.trace (E * Y) = (c : ?) * Matrix.trace (? * Y) := by
    rw [hE?, Matrix.smul_mul, Matrix.trace_smul, Complex.real_smul]
  rw [hXE, hYE, h?]
```

#### 4.4.1225 Born rule of the block

**Statement.** For natural numbers  $n, q$ , a superoperator  $\psi$ , indexes  $a, b$ , a matrix  $\rho$ : an explicit expression in the trace and the finite index prod finite index equivalence equals an explicit expression in the finite index prod finite index equivalence.

**Proof.** The goal is simplified using standard identities for matrices and the sum of a congruence.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean](#)

```
theorem born_block {n q : Nat}
  (psi : Superoperator (n * q) 1) (a b : Fin n)
```

```

(? : Matrix (Fin q) (Fin q) ?) :
Matrix.trace (? *
  (Matrix.of fun j i : Fin q =>
    psi.cp.effect (finProdFinEquiv (a, j)) (finProdFinEquiv (b, i)))) =
  ? i : Fin q, ? j : Fin q,
    psi.cp.effect (finProdFinEquiv (a, j)) (finProdFinEquiv (b, i)) * ? i j := by
simp only [Matrix.trace, diag, Matrix.mul_apply, Matrix.of_apply]
refine Finset.sum_congr rfl fun i _ => Finset.sum_congr rfl fun j _ => mul_comm _ _

```

#### 4.4.1226 The superoperator of a product respects tensor product of the preparation

**Statement.** For natural numbers  $n, q$ , superoperators  $\psi_1, \psi_2$ : if for every  $\sigma$ , the composite of  $\psi_1$  after the tensor product of `Superoperator.identity n` and  $\sigma$  equals the composite of  $\psi_2$  after the tensor product of `Superoperator.identity n` and  $\sigma$ , then  $\psi_1 = \psi_2$ .

**Proof.** Both sides are compared pointwise (by extensionality). The claim follows from a chain of equalities (or inequalities). The key step rewrites with the definition of the `m 1`, the definition of the `m 2`, standard identities for matrices and the fact that trace of an intrinsic CP action is pairing with its input effect.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean](#)

```

theorem superoperator_mul_eq_of_tensor_prep {n q : Nat}
  {psi_1 psi_2 : Superoperator (n * q) 1}
  (h : forall sigma : Superoperator 1 q,
    Superoperator.comp psi_1
      (Superoperator.tensor (Superoperator.identity n) sigma) =
      Superoperator.comp psi_2
        (Superoperator.tensor (Superoperator.identity n) sigma)) :
  psi_1 = psi_2 := by
have heff : psi_1.cp.effect = psi_2.cp.effect := by
  ext p r
  set p' := finProdFinEquiv.symm p
  set r' := finProdFinEquiv.symm r
  have hp : finProdFinEquiv p' = p := Equiv.apply_symm_apply _ _
  have hr : finProdFinEquiv r' = r := Equiv.apply_symm_apply _ _
  set a : Fin n := p'.1
  set b : Fin n := r'.1
  set M1 : Matrix (Fin q) (Fin q) ? :=
    Matrix.of fun j i =>
      psi_1.cp.effect (finProdFinEquiv (a, j)) (finProdFinEquiv (b, i))
  set M2 : Matrix (Fin q) (Fin q) ? :=
    Matrix.of fun j i =>
      psi_2.cp.effect (finProdFinEquiv (a, j)) (finProdFinEquiv (b, i))
  have hM : M1 = M2 := by
    refine matrix_eq_of_forall_density_trace (fun ? hpsd htr => ?_)
    set sigma := preparationOfDensity ? hpsd htr
    have hcomp := congrArg (fun ? : Superoperator (n * 1) 1 =>
      ?.cp.effect (finProdFinEquiv (a, (0 : Fin 1)))
        (finProdFinEquiv (b, (0 : Fin 1)))) (h sigma)
    have h1 := effect_comp_id_tensor_prep psi_1 sigma a b
    have h2 := effect_comp_id_tensor_prep psi_2 sigma a b
    have happ1 : sigma.cp.applyMat (1 : Matrix (Fin 1) (Fin 1) ?) = ? :=
      preparationOfDensity_applyMat_one ? hpsd htr

```

```

calc Matrix.trace (? * M1)
  = ? i : Fin q, ? j : Fin q,
    psi_1.cp.effect (finProdFinEquiv (a, j)) (finProdFinEquiv (b, i)) *
    ? i j := by simp [M1] using born_block psi_1 a b ?
_ = ? i : Fin q, ? j : Fin q,
  psi_1.cp.effect (finProdFinEquiv (a, j)) (finProdFinEquiv (b, i)) *
  sigma.cp.applyMat (1 : Matrix (Fin 1) (Fin 1) ?) i j := by
  simp only [happ1]
_ = (Superoperator.comp psi_1
  (Superoperator.tensor (Superoperator.identity n) sigma)).cp.effect
  (finProdFinEquiv (a, (0 : Fin 1)))
  (finProdFinEquiv (b, (0 : Fin 1))) := h1.symm
_ = (Superoperator.comp psi_2
  (Superoperator.tensor (Superoperator.identity n) sigma)).cp.effect
  (finProdFinEquiv (a, (0 : Fin 1)))
  (finProdFinEquiv (b, (0 : Fin 1))) := hcomp
_ = ? i : Fin q, ? j : Fin q,
  psi_2.cp.effect (finProdFinEquiv (a, j)) (finProdFinEquiv (b, i)) *
  sigma.cp.applyMat (1 : Matrix (Fin 1) (Fin 1) ?) i j := h2
_ = ? i : Fin q, ? j : Fin q,
  psi_2.cp.effect (finProdFinEquiv (a, j)) (finProdFinEquiv (b, i)) *
  ? i j := by simp only [happ1]
_ = Matrix.trace (? * M2) := by
  simp [M2] using (born_block psi_2 a b ?).symm
have hentry := congrArg (fun M : Matrix (Fin q) (Fin q) ? => M p'.2 r'.2) hM
simp only [M1, M2, Matrix.of_apply, a, b] at hentry
rw [ <- hp, <- hr]
exact hentry
apply Superoperator.ext
apply CMap.ext_apply
intro ?
have htr : Matrix.trace (psi_1.cp.applyMat ?) = Matrix.trace (psi_2.cp.applyMat ?)
:= by
  rw [CMap.trace_applyMat_eq_effect, CMap.trace_applyMat_eq_effect, heff]
ext i j; fin_cases i; fin_cases j
simp [Matrix.trace, Fin.default_eq_zero] using htr

```

#### 4.4.1227 The pairing equals the imp of the application of the identity

**Statement.** For natural numbers  $A, n, q$ , a superoperator  $\Phi$ : if for every  $e$ ,  $\text{doubleDualEffect Pairing } F \ e = \text{effectPrecompose } \Phi \ e$ , then the application of the identity on dimension  $n$  and  $b$  equals an explicit expression in the unit, the representable module and the identity.

**Proof.** The hypotheses are unpacked into their constituent data. The key step rewrites with the convert the tensor-unit action to ordinary superoperator composition and the fact that the superoperator of a product respects tensor product of the preparation.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean](#)

```

theorem pairing_eq_imp_app_id {A n : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier)
  (? : Superoperator n A)
  (ha : forall e : Superoperator A 1,

```

```

    doubleDualEffectPairing F e = effectPrecompose ? e)
  (q : Nat) (b : ((DayNegation.neg (representable A)).obj q).Carrier) :
  F.app (Superoperator.identity n) b =
    ((DayNegation.unit (representable A)).app n ?).app
      (Superoperator.identity n) b := by
obtain <chi, rfl> := dualFiberBilinear_surjective A q b
set a := F.app (Superoperator.identity n) (dualFiberBilinear A q chi)
set b := ((DayNegation.unit (representable A)).app n ?).app
  (Superoperator.identity n) (dualFiberBilinear A q chi)
have hmul :
  forall sigma : Superoperator 1 q,
    Superoperator.comp a
      (Superoperator.tensor (Superoperator.identity n) sigma) =
      Superoperator.comp b
        (Superoperator.tensor (Superoperator.identity n) sigma) := by
intro sigma
have hact :
  (DayNegation.neg (representable A)).act (dualFiberBilinear A q chi) sigma =
    dualFiberBilinear A 1
      (Superoperator.comp chi
        (Superoperator.tensor sigma (Superoperator.identity A))) :=
  act_dualFiberBilinear chi sigma
have hFsigma := doubleDual_app_act F (dualFiberBilinear A q chi) sigma
have hUsigma := doubleDual_app_act
  ((DayNegation.unit (representable A)).app n ?) (dualFiberBilinear A q chi)
sigma
have hfiber :
  F.app (Superoperator.identity n)
    (dualFiberBilinear A 1
      (Superoperator.comp chi
        (Superoperator.tensor sigma (Superoperator.identity A)))) =
    ((DayNegation.unit (representable A)).app n ?).app
      (Superoperator.identity n)
      (dualFiberBilinear A 1
        (Superoperator.comp chi
          (Superoperator.tensor sigma (Superoperator.identity A)))) :=
  pairing_eq_imp_app_fiber_one F ? ha _
have hL :
  Superoperator.comp a
    (Superoperator.tensor (Superoperator.identity n) sigma) =
  F.app (Superoperator.identity n)
    (dualFiberBilinear A 1
      (Superoperator.comp chi
        (Superoperator.tensor sigma (Superoperator.identity A)))) := by
have h := hFsigma.symm
simp only [hact] at h
-- h : dayTensorUnit.act a (id?sigma) = F.app ...
exact (dayTensorUnit_act_eq_comp a
  (Superoperator.tensor (Superoperator.identity n) sigma)).symm.trans h
have hR :
  Superoperator.comp b
    (Superoperator.tensor (Superoperator.identity n) sigma) =
  ((DayNegation.unit (representable A)).app n ?).app
    (Superoperator.identity n)
    (dualFiberBilinear A 1
      (Superoperator.comp chi

```

```

      (Superoperator.tensor sigma (Superoperator.identity A))) := by
    have h := hUsigma.symm
    simp only [hact] at h
    exact (dayTensorUnit_act_eq_comp b
      (Superoperator.tensor (Superoperator.identity n) sigma)).symm.trans h
    rw [hL, hR, hfiber]
    exact superoperator_mul_eq_of_tensor_prep hmul

```

#### 4.4.1228 The double dual equals the unit, assuming pairing

**Statement.** For natural numbers  $A, n$ , a superoperator  $\Phi$ : if for every  $e$ , `doubleDualEffectPairing  $F\ e = \text{effectPrecompose } \Phi\ e$` , then  $F = (\text{DayNegation.unit } (\text{representable } A)).\text{app } n\ \Phi$ .

**Proof.** This is an instance of the fact that the double dual respects application of the identity.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean](#)

```

theorem doubleDual_eq_unit_of_pairing {A n : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier)
  (? : Superoperator n A)
  (ha : forall e : Superoperator A 1,
    doubleDualEffectPairing F e = effectPrecompose ? e) :
  F = (DayNegation.unit (representable A)).app n ? :=
  doubleDual_eq_of_app_id F _ (fun q b => pairing_eq_imp_app_id F ? ha q b)

```

#### 4.4.1229 Surjectiivty of the representable module of the unit of the surjectivity

**Statement.** For a natural number  $A$ : if  $0 < A$ , then  $(\text{DayNegation.unit } (\text{representable } A)).\text{app } 1$  is surjective.

**Proof.** Each component of the claim is established separately. The hypotheses are unpacked into their constituent data. It follows from the fact that the double dual equals the unit, assuming pairing.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean](#)

```

theorem representable_unit_surjective_one {A : Nat} (hA : 0 < A) :
  Function.Surjective ((DayNegation.unit (representable A)).app 1) := by
  intro F
  obtain <?, h?> := exists_preparation_of_doubleDual hA F
  refine <?, ?_>
  exact (doubleDual_eq_unit_of_pairing F ? (fun e => (h? e).symm)).symm

```

```

/-! ### Column / cup-evaluation naturality (Path A scaffolding) -/

```

#### 4.4.1230 Column / cup-evaluation naturality (Path A scaffolding)

**Statement.** `### Column / cup-evaluation naturality (Path A scaffolding).`

**Proof.** The key step rewrites with the Choi matrix of a tensor product for completely positive maps, standard identities for matrices, the definition of the Choi tensor product equivalence and standard identities for equivalences.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean](#)

```
theorem choi_tensor_prep_id {A n : Nat} (sigma : CMap 1 n)
  (x y : Fin n) (a b : Fin A) (i j : Fin 1) (c d : Fin A) :
  (CMap.tensor sigma (CMap.identity A)).choi
    (finProdFinEquiv (x, a), finProdFinEquiv (i, c))
    (finProdFinEquiv (y, b), finProdFinEquiv (j, d)) =
  sigma.choi (x, i) (y, j) *
    (if a = c then 1 : ?) else 0) * (if b = d then 1 else 0) := by
  rw [CMap.choi_tensor]
  simp only [Matrix.reindex_apply, Matrix.submatrix_apply]
  have h1 : (CMap.choiTensorEquiv 1 n A A).symm
    (finProdFinEquiv (x, a), finProdFinEquiv (i, c)) = ((x, i), (a, c)) := by
    dsimp [CMap.choiTensorEquiv]; simp only [Equiv.symm_apply_apply]
  have h2 : (CMap.choiTensorEquiv 1 n A A).symm
    (finProdFinEquiv (y, b), finProdFinEquiv (j, d)) = ((y, j), (b, d)) := by
    dsimp [CMap.choiTensorEquiv]; simp only [Equiv.symm_apply_apply]
  rw [h1, h2]; simp [choi_identity_pair]
```

#### 4.4.1231 The effect composition tensor product preparation

**Statement.** For natural numbers  $A, n$ , superoperators  $\chi, \sigma$ , indexes  $i, j, r, s$ : an explicit expression in the composition, the tensor product, the identity and the finite index prod finite index equivalence equals an explicit expression in the finite index prod finite index equivalence.

**Proof.** The key step rewrites with the underlying completely positive map of a composite for superoperators, the underlying completely positive map of a tensor product for superoperators, the effect of post-composing with a map into 1 and standard identities for equivalences.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean](#)

```
theorem effect_comp_tensor_prep {A n : Nat}
  (chi : Superoperator (n * A) 1) (sigma : Superoperator 1 n)
  (i j : Fin 1) (r s : Fin A) :
  (Superoperator.comp chi
    (Superoperator.tensor sigma (Superoperator.identity A))).cp.effect
    (finProdFinEquiv (i, r)) (finProdFinEquiv (j, s)) =
  ? x : Fin n, ? y : Fin n,
    chi.cp.effect (finProdFinEquiv (y, r)) (finProdFinEquiv (x, s)) *
    sigma.cp.choi (x, j) (y, i) := by
  classical
  let e : Fin n x Fin A ? Fin (n * A) := finProdFinEquiv
  have hcp :
    (Superoperator.comp chi
      (Superoperator.tensor sigma (Superoperator.identity A))).cp =
    CMap.comp chi.cp (CMap.tensor sigma.cp (CMap.identity A)) := by
  rw [Superoperator.cp_comp, Superoperator.cp_tensor]; rfl
  rw [hcp, effect_comp_effect]
```

```

have hS' :
  (? u : Fin (n * A), ? v : Fin (n * A),
    chi.cp.effect v u *
      (CMap.tensor sigma.cp (CMap.identity A)).choi
        (u, finProdFinEquiv (j, s)) (v, finProdFinEquiv (i, r))) =
  ? x : Fin n, ? a : Fin A, ? y : Fin n, ? b : Fin A,
    chi.cp.effect (e (y, b)) (e (x, a)) *
      (CMap.tensor sigma.cp (CMap.identity A)).choi
        (e (x, a), finProdFinEquiv (j, s))
        (e (y, b), finProdFinEquiv (i, r))) := by
  rw [ <- Equiv.sum_comp e (fun u => ? v : Fin (n * A),
    chi.cp.effect v u *
      (CMap.tensor sigma.cp (CMap.identity A)).choi
        (u, finProdFinEquiv (j, s)) (v, finProdFinEquiv (i, r))) ]
  rw [Fintype.sum_prod_type]
  refine Finset.sum_congr rfl fun x _ => Finset.sum_congr rfl fun a _ => ?_
  rw [ <- Equiv.sum_comp e (fun v =>
    chi.cp.effect v (e (x, a)) *
      (CMap.tensor sigma.cp (CMap.identity A)).choi
        (e (x, a), finProdFinEquiv (j, s)) (v, finProdFinEquiv (i, r))) ]
  rw [Fintype.sum_prod_type]
  rw [hS']
have hten (x y : Fin n) (a b : Fin A) :
  (CMap.tensor sigma.cp (CMap.identity A)).choi
    (e (x, a), finProdFinEquiv (j, s))
    (e (y, b), finProdFinEquiv (i, r)) =
  sigma.cp.choi (x, j) (y, i) *
    (if a = s then (1 : ?) else 0) * (if b = r then 1 else 0) :=
  choi_tensor_prep_id sigma.cp x y a b j i s r
simp_rw [hten]
refine Finset.sum_congr rfl fun x _ => ?_
have hswap :
  (? a : Fin A, ? y : Fin n, ? b : Fin A,
    chi.cp.effect (e (y, b)) (e (x, a)) *
      (sigma.cp.choi (x, j) (y, i) *
        (if a = s then (1 : ?) else 0) * (if b = r then 1 else 0))) =
  ? y : Fin n, ? a : Fin A, ? b : Fin A,
    chi.cp.effect (e (y, b)) (e (x, a)) *
      (sigma.cp.choi (x, j) (y, i) *
        (if a = s then (1 : ?) else 0) * (if b = r then 1 else 0)) :=
  Finset.sum_comm
  rw [hswap]
  refine Finset.sum_congr rfl fun y _ => ?_
  rw [Finset.sum_eq_single s]
  * rw [Finset.sum_eq_single r]
  * simp [e]
  * intro b _ hb; simp [hb]
  * intro h; exact (h (Finset.mem_univ _)).elim
* intro a _ ha
  simp only [ha, ite_false, mul_zero, zero_mul, Finset.sum_const_zero]
  * intro h; exact (h (Finset.mem_univ _)).elim

```



#### 4.4.1232 Recover CP of a composite of a tensor product

**Statement.** For natural numbers  $A, n$ , superoperators  $\chi, \sigma$ : if  $0 < A$ , then the recover CP of  $hA$  and the composite of  $\chi$  after `Superoperator.tensor  $\sigma$  (Superoperator.identity A)` equals the composite of the recover CP of  $hA$  and  $\chi$  after the underlying completely positive map of  $\sigma$ .

**Proof.** Both sides are compared pointwise (by extensionality). The claim follows from a chain of equalities (or inequalities). The key step rewrites with the recover CP of the Choi matrix, the definition of the cup name CP, the pointwise formula for the effect as Choi and standard identities for matrices.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean`

```
theorem recoverCP_comp_tensor {A n : Nat} (hA : 0 < A)
  (chi : Superoperator (n * A) 1) (sigma : Superoperator 1 n) :
  recoverCP hA
    (Superoperator.comp chi
      (Superoperator.tensor sigma (Superoperator.identity A))) =
    CPMMap.comp (recoverCP hA chi) sigma.cp := by
  apply CPMMap.ext
  ext p q
  have heff := effect_comp_tensor_prep (A := A) (n := n) chi sigma q.2 p.2 q.1 p.1
  calc
    (recoverCP hA
      (Superoperator.comp chi
        (Superoperator.tensor sigma (Superoperator.identity A))))
    .choi p q =
    (A : ?) *
    (Superoperator.comp chi
      (Superoperator.tensor sigma (Superoperator.identity A)))
    .cp.effect
    (finProdFinEquiv (q.2, q.1)) (finProdFinEquiv (p.2, p.1)) := by
    simp only [recoverCP_choi, cupNameCP, effectAsChoi_apply, Matrix.smul_apply]
  _ = (A : ?) *
    ? x : Fin n, ? y : Fin n,
    chi.cp.effect (finProdFinEquiv (y, q.1)) (finProdFinEquiv (x, p.1)) *
    sigma.cp.choi (x, p.2) (y, q.2) := by rw [heff]
  _ = ? x : Fin n, ? y : Fin n,
    ((A : ?) *
      chi.cp.effect (finProdFinEquiv (y, q.1)) (finProdFinEquiv (x, p.1))) *
    sigma.cp.choi (x, p.2) (y, q.2) := by
    simp only [Finset.smul_sum, smul_mul_assoc]
  _ = ? x : Fin n, ? y : Fin n,
    (recoverCP hA chi).choi (p.1, x) (q.1, y) * sigma.cp.choi (x, p.2) (y, q.2)
  := by
    refine Finset.sum_congr rfl fun x _ => Finset.sum_congr rfl fun y _ => ?_
    simp only [recoverCP_choi, cupNameCP, effectAsChoi_apply, Matrix.smul_apply]
  _ = (CPMap.comp (recoverCP hA chi) sigma.cp).choi p q := by
    rw [CPMap.choi_comp_apply]
```

#### 4.4.1233 The act application identity cup

**Statement.** For natural numbers  $A, n$ , a superoperator  $\sigma$ : if  $0 < A$ , then an explicit expression in the negation, the representable module, the identity and the normalized cup probe equals the application of  $\sigma$  and the normalized cup probe of  $A$  and  $hA$ .

**Proof.** The goal is simplified using the definition of the precompose and the composition of the identity for superoperators.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean](#)

```
theorem act_app_id_cup {A n : Nat} (hA : 0 < A)
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier)
  (sigma : Superoperator 1 n) :
  ((DayNegation.neg (DayNegation.neg (representable A))).act F sigma).app
    (Superoperator.identity 1) (normalizedCupProbe A hA) =
  F.app sigma (normalizedCupProbe A hA) := by
  change
    (DayInternalHom.precompose sigma F).app
      (Superoperator.identity 1) (normalizedCupProbe A hA) =
  F.app sigma (normalizedCupProbe A hA)
  simp only [DayInternalHom.precompose, Superoperator.comp_identity]
```

#### 4.4.1234 Application of the cup probe of the pullback

**Statement.** For natural numbers  $A, n$ , a superoperator  $\sigma$ : if  $0 < A$ , then the application of  $\sigma$  and the normalized cup probe of  $A$  and  $hA$  equals the composite of the application of `Superoperator.identity`  $n$  and `normalizedCupProbe`  $A$   $hA$  after the tensor product of  $\sigma$  and `Superoperator.identity`  $A$ .

**Proof.** The key step rewrites with the representable module of the act, the identity of a composite for superoperators and the fact that observational equality is transitive.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean](#)

```
theorem app_cupProbe_pullback {A n : Nat} (hA : 0 < A)
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier)
  (sigma : Superoperator 1 n) :
  F.app sigma (normalizedCupProbe A hA) =
  Superoperator.comp
    (F.app (Superoperator.identity n) (normalizedCupProbe A hA))
    (Superoperator.tensor sigma (Superoperator.identity A)) := by
  have hF := F.naturality (Superoperator.identity n) (normalizedCupProbe A hA)
  sigma (Superoperator.identity A)
  have h1 : (representable n).act (Superoperator.identity n) sigma = sigma := by
    rw [representable_act, Superoperator.identity_comp]
  have h2 : (DayNegation.neg (representable A)).act (normalizedCupProbe A hA)
    (Superoperator.identity A) = normalizedCupProbe A hA :=
    (DayNegation.neg (representable A)).act_id _
  rw [h1, h2] at hF
  exact hF.trans (representable_act _ _)
```

#### 4.4.1235 Evaluation fiber of the act

**Statement.** For natural numbers  $A, n$ , a superoperator  $\sigma$ : if  $0 < A$ , then an explicit expression in the evaluation fiber, the negation and the representable module equals the composite of the evaluation fiber of  $h$

A and F after the underlying completely positive map of  $\sigma$ .

**Proof.** The key step rewrites with the act application identity cup, the application of the cup probe of the pullback, the definition of the evaluation fiber and the recover CP of a composite of a tensor product.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean](#)

```
theorem evaluationFiber_act {A n : Nat} (hA : 0 < A)
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier)
  (sigma : Superoperator 1 n) :
  evaluationFiber hA
    ((DayNegation.neg (DayNegation.neg (representable A))).act F sigma) =
    CPMMap.comp (evaluationFiber hA F) sigma.cp := by
  unfold evaluationFiber
  rw [act_app_id_cup hA F sigma, app_cupProbe_pullback hA F sigma]
  exact recoverCP_comp_tensor hA _ sigma
```

#### 4.4.1236 Definition of the double dual column

**Definition.** The double dual column of F and  $\sigma$  is a superoperator from 1 to A.

**Construction.** Defined by an explicit formula built from the representable unit surjectivity one, the negation and the representable module.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean](#)

```
noncomputable def doubleDualColumn {A n : Nat} (hA : 0 < A)
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier)
  (sigma : Superoperator 1 n) : Superoperator 1 A :=
  Classical.choose
    (representable_unit_surjective_one hA
      ((DayNegation.neg (DayNegation.neg (representable A))).act F sigma))
```

#### 4.4.1237 Specification of the double dual column

**Statement.** For natural numbers A, n, a superoperator  $\sigma$ : if  $0 < A$ , then  $(\text{DayNegation.unit } (\text{representable } A)).\text{app } 1 \text{ (doubleDualColumn hA F } \sigma)$  equals  $(\text{DayNegation.neg } (\text{DayNegation.neg } (\text{representable } A))).\text{act } F \sigma$ .

**Proof.** The proof term combines the facts named in it directly.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean](#)

```
theorem doubleDualColumn_spec {A n : Nat} (hA : 0 < A)
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier)
  (sigma : Superoperator 1 n) :
  (DayNegation.unit (representable A)).app 1 (doubleDualColumn hA F sigma) =
    (DayNegation.neg (DayNegation.neg (representable A))).act F sigma :=
  Classical.choose_spec
    (representable_unit_surjective_one hA
      ((DayNegation.neg (DayNegation.neg (representable A))).act F sigma))
```

#### 4.4.1238 Evaluation fiber of the column

**Statement.** For natural numbers  $A, n$ , a superoperator  $\sigma$ : if  $0 < A$ , then an explicit expression in the evaluation fiber, the negation and the representable module equals  $(\text{doubleDualColumn } hA \ F \ \sigma) \cdot \text{cp}$ .

**Proof.** The key step rewrites with the retraction on the image of the unit (Choi level) and the fact that observational equality is symmetric.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean](#)

```
theorem evaluationFiber_column {A n : Nat} (hA : 0 < A)
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier)
  (sigma : Superoperator 1 n) :
  evaluationFiber hA
    ((DayNegation.neg (DayNegation.neg (representable A))).act F sigma) =
    (doubleDualColumn hA F sigma).cp := by
  have h := congrArg (evaluationFiber hA) (doubleDualColumn_spec hA F sigma)
  rw [evaluationFiber_unit] at h
  exact h.symm
```

#### 4.4.1239 Evaluation fiber of the trace non-increase

**Statement.** For natural numbers  $A, n$ : if  $0 < A$ , then  $\text{TraceNonincreasing } (\text{evaluationFiber } hA \ F)$ .

**Proof.** Both sides are compared pointwise (by extensionality). Equality is proved by showing both inequalities. The argument splits on the relevant condition. The key step rewrites with standard identities for matrices, standard identities for complex numbers, the usual algebraic identities and the evaluation fiber of the act.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean](#)

```
theorem evaluationFiber_traceNonincreasing {A n : Nat} (hA : 0 < A)
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier) :
  TraceNonincreasing (evaluationFiber hA F) := by
  intro ? h?
  set ? := evaluationFiber hA F
  have hnn := Matrix.PosSemidef.trace_nonneg h?
  have hre_nn : 0 <= (Matrix.trace ?).re := (Complex.nonneg_iff.mp hnn).1
  have him0 : (Matrix.trace ?).im = 0 := (Complex.nonneg_iff.mp hnn).2.symm
  by_cases hpos : 0 < (Matrix.trace ?).re
  * set t : ? := (Matrix.trace ?).re
    set ?' : Matrix (Fin n) (Fin n) ? := (t^-1 : ?) * ?
    have ht0 : t != 0 := ne_of_gt hpos
    have h?'psd : ?'.PosSemidef := h?.smul (inv_nonneg.mpr (le_of_lt hpos))
    have h?'trace_re : (Matrix.trace ?').re = 1 := by
      simp only [?', Matrix.trace_smul, Complex.smul_re, smul_eq_mul]
      exact inv_mul_cancel_0 ht0
    have h?'tr : (Matrix.trace ?').re <= 1 := le_of_eq h?'trace_re
    set sigma := preparationOfDensity ?' h?'psd h?'tr
    have hcomp : TraceNonincreasing (CPMap.comp ? sigma.cp) := by
```

```

    rw [ <- evaluationFiber_act hA F sigma, evaluationFiber_column hA F sigma]
    exact (doubleDualColumn hA F sigma).trace_nonincreasing
  have hsignal : sigma.cp.applyMat (1 : Matrix (Fin 1) (Fin 1) ?) = ?' :=
    preparationOfDensity_applyMat_one ?' h?'psd h?'tr
  have hborn := hcomp (1 : Matrix (Fin 1) (Fin 1) ?) Matrix.PosSemidef.one
  have hltr : (Matrix.trace (1 : Matrix (Fin 1) (Fin 1) ?)).re = 1 := by
    simp [Matrix.trace, Fin.default_eq_zero]
  rw [hltr, CPMMap.applyMat_comp, hsignal] at hborn
  have hr : ? = (t : ?) * ?' := by
    simp only [?']
    ext i j
    simp [Matrix.smul_apply, Complex.real_smul]
    field_simp [ht0]
  have hscale : ?.applyMat ? = (t : ?) * ?.applyMat ?' := by
    rw [hr, CPMMap.applyMat_smul]
  have htr : (Matrix.trace (?.applyMat ?)).re =
    t * (Matrix.trace (?.applyMat ?')).re := by
    rw [hscale]
    simp [Matrix.trace_smul]
  rw [htr]
  simp [mul_one] using mul_le_mul_of_nonneg_left hborn (le_of_lt hpos)
* have hre0 : (Matrix.trace ?).re = 0 := le_antisymm (not_lt.mp hpos) hre_nn
  have htr0 : Matrix.trace ? = 0 := Complex.ext hre0 him0
  have h?0 : ? = 0 := (Matrix.PosSemidef.trace_eq_zero_iff h?).mp htr0
  have happ0 : ?.applyMat ? = 0 := by
    rw [h?0, <- zero_smul ? (1 : Matrix (Fin n) (Fin n) ?), CPMMap.applyMat_smul,
        zero_smul]
  simp [happ0, Matrix.trace_zero, htr0]

```

#### 4.4.1240 Total fiber cup-evaluation as a superoperator (TNI from columns)

**Definition.** Total fiber cup-evaluation as a superoperator (TNI from columns).

**Construction.** Constructed by supplying each component: underlying completely positive map and trace nonincreasing. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean](#)

```

noncomputable def evaluationFiberSO_total {A n : Nat} (hA : 0 < A)
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier) :
  Superoperator n A where
  cp := evaluationFiber hA F
  trace_nonincreasing := evaluationFiber_traceNonincreasing hA F

```

#### 4.4.1241 Totality of the evaluation fiber superoperator, at the unit

**Statement.** For natural numbers  $A, n$ , a superoperator  $\Phi$ : if  $0 < A$ , then the evaluation fiber superoperator totality of  $hA$  and  $(\text{DayNegation.unit } (\text{representable } A)).\text{app } n \ \Phi$  equals  $\Phi$ .

**Proof.** Both sides are compared pointwise (by extensionality). It follows from the extensionality for superoperators and the retraction on the image of the unit (Choi level).

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean](#)

```
theorem evaluationFiberSO_total_unit {A n : Nat} (hA : 0 < A)
  (? : Superoperator n A) :
  evaluationFiberSO_total hA ((DayNegation.unit (representable A)).app n ?) = ? :=
  by
  apply Superoperator.ext
  exact evaluationFiber_unit hA ?
```

#### 4.4.1242 Pairing of the coherence

**Statement.** For a natural number  $n$ , superoperators  $z, \sigma$ : an explicit expression in the composition, the tensor product, the identity and the tensor swap equals an explicit expression in the composition, the tensor swap and the inverse tensor left unitor.

**Proof.** The key step rewrites with the fact that composition for superoperators is associative, the fact that the tensor swap is an involution, the identity of a composite for superoperators and the composition of the identity for superoperators.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean](#)

```
theorem pairing_coherence {n : Nat}
  (z : Superoperator (n * 1) 1) (sigma : Superoperator 1 n) :
  Superoperator.comp
    (Superoperator.comp
      (Superoperator.comp z
        (Superoperator.tensor sigma (Superoperator.identity 1)))
      (Superoperator.tensorSwap 1 1))
    (Superoperator.tensorLeftUnitorInv 1) =
  Superoperator.comp
    (Superoperator.comp
      (Superoperator.comp z (Superoperator.tensorSwap 1 n))
      (Superoperator.tensorLeftUnitorInv n))
    sigma := by
  have hswap :
    Superoperator.tensor sigma (Superoperator.identity 1) =
    Superoperator.comp (Superoperator.tensorSwap 1 n)
      (Superoperator.comp
        (Superoperator.tensor (Superoperator.identity 1) sigma)
        (Superoperator.tensorSwap 1 1)) := by
  have hnata :=
    Superoperator.tensorSwap_naturality (a := 1) (a' := n) (b := 1) (b' := 1)
    sigma (Superoperator.identity 1)
  have h :=
    congrArg (Superoperator.comp (Superoperator.tensorSwap 1 n)) hnata
  have h1 :
    Superoperator.comp (Superoperator.tensorSwap 1 n)
      (Superoperator.comp (Superoperator.tensorSwap n 1)
        (Superoperator.tensor sigma (Superoperator.identity 1))) =
    Superoperator.tensor sigma (Superoperator.identity 1) := by
  rw [Superoperator.comp_assoc, Superoperator.tensorSwap_involution,
    Superoperator.identity_comp]
```

```

    exact h1.symm.trans h
  rw [hswap]
  trans Superoperator.comp
    (Superoperator.comp
      (Superoperator.comp
        (Superoperator.comp z (Superoperator.tensorSwap 1 n))
        (Superoperator.tensor (Superoperator.identity 1) sigma))
      (Superoperator.comp (Superoperator.tensorSwap 1 1)
        (Superoperator.tensorSwap 1 1)))
    (Superoperator.tensorLeftUnitorInv 1)
  * simp only [ <- Superoperator.comp_assoc]
  * rw [Superoperator.tensorSwap_involutive 1 1, Superoperator.comp_identity]
  rw [ <- Superoperator.comp_assoc]
  rw [Superoperator.tensorLeftUnitorInv_naturality sigma]
  rw [Superoperator.comp_assoc]

/-! ### Double-dual evaluation Hom / reflexivity packaging -/

```

#### 4.4.1243 Double-dual evaluation Hom / reflexivity packaging

**Statement.** ### Double-dual evaluation Hom / reflexivity packaging. Formally:  $((\text{DayNegation.neg } (\text{DayNegation.neg } (\text{representable } A))) \cdot \text{act } F \sigma) \cdot \text{app } (\text{Superoperator.identity } 1) b = F \cdot \text{app } \sigma b$ .

**Proof.** The goal is simplified using the definition of the precompose and the composition of the identity for superoperators.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean](#)

```

theorem act_app_id {A n : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier)
  (sigma : Superoperator 1 n)
  (b : ((DayNegation.neg (representable A)).obj 1).Carrier) :
  ((DayNegation.neg (DayNegation.neg (representable A))).act F sigma).app
    (Superoperator.identity 1) b =
    F.app sigma b := by
  change (DayInternalHom.precompose sigma F).app (Superoperator.identity 1) b = F.app
    sigma b
  simp only [DayInternalHom.precompose, Superoperator.comp_identity]

```

#### 4.4.1244 Evaluation fiber superoperator of the totality of a composite of the preparation

**Statement.** For natural numbers  $A, n$ , a superoperator  $\sigma$ : if  $0 < A$ , then the composite of the evaluation fiber superoperator totality of  $hA$  and  $F$  after  $\sigma$  equals the double dual column of  $hA, F, \sigma$ .

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the extensionality for superoperators.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean](#)

```

theorem evaluationFiberSO_total_comp_prep {A n : Nat} (hA : 0 < A)
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier)
  (sigma : Superoperator 1 n) :
  Superoperator.comp (evaluationFiberSO_total hA F) sigma =
    doubleDualColumn hA F sigma := by
  apply Superoperator.ext
  have h1 := evaluationFiber_act hA F sigma
  have h2 := evaluationFiber_column hA F sigma
  change (evaluationFiber hA F).comp sigma.cp = (doubleDualColumn hA F sigma).cp
  rw [ <- h1, h2]

```

#### 4.4.1245 Formula for the pairing of the act

**Statement.** For natural numbers  $A, n$ , superoperators  $\sigma, e$ : an explicit expression in the double dual effect pairing, the negation and the representable module equals the composite of the double dual effect pairing of  $F$  and  $e$  after  $\sigma$ .

**Proof.** The key step rewrites with the double-dual evaluation Hom / reflexivity packaging, the double dual of the application of the identity, the definition of the double dual effect pairing and the pairing of the coherence.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean](#)

```

theorem pairing_act_eq {A n : Nat}
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier)
  (sigma : Superoperator 1 n) (e : Superoperator A 1) :
  doubleDualEffectPairing
    ((DayNegation.neg (DayNegation.neg (representable A))).act F sigma) e =
    Superoperator.comp (doubleDualEffectPairing F e) sigma := by
  set z : Superoperator (n * 1) 1 :=
    F.app (Superoperator.identity n) (effectPack A e)
  have hLHS :
    doubleDualEffectPairing
      ((DayNegation.neg (DayNegation.neg (representable A))).act F sigma) e =
      Superoperator.comp
        (Superoperator.comp
          (Superoperator.comp z
            (Superoperator.tensor sigma (Superoperator.identity 1)))
          (Superoperator.tensorSwap 1 1))
        (Superoperator.tensorLeftUnitorInv 1) := by
  unfold doubleDualEffectPairing
  rw [act_app_id F sigma (effectPack A e), doubleDual_app_identity F sigma (
    effectPack A e)]
  rw [show dayTensorUnit.act
    (F.app (Superoperator.identity n) (effectPack A e))
    (Superoperator.tensor sigma (Superoperator.identity 1)) =
    Superoperator.comp z (Superoperator.tensor sigma (Superoperator.identity 1))
  from by
    simp [z] using (dayTensorUnit_act_eq_comp
      (F.app (Superoperator.identity n) (effectPack A e))
      (Superoperator.tensor sigma (Superoperator.identity 1)))]
  have hRHS :
    Superoperator.comp (doubleDualEffectPairing F e) sigma =

```



```

Superoperator.comp
  (Superoperator.comp
    (Superoperator.comp z (Superoperator.tensorSwap 1 n))
    (Superoperator.tensorLeftUnitorInv n))
  sigma := by
  unfold doubleDualEffectPairing; rfl
rw [hLHS, hRHS]
exact pairing_coherence z sigma

```

#### 4.4.1246 The pairing equals the evaluation fiber superoperator of the totality

**Statement.** For natural numbers  $A, n$ , a superoperator  $e$ : if  $0 < A$ , then the double dual effect pairing of  $F$  and  $e$  equals the precomposition with an effect of the evaluation fiber superoperator totality of  $hA$  and  $F$  and  $e$ .

**Proof.** The claim follows from a chain of equalities (or inequalities). The key step rewrites with the fact that the superoperator to one respects composition of the preparation.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean](#)

```

theorem pairing_eq_evaluationFiberSO_total {A n : Nat} (hA : 0 < A)
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier)
  (e : Superoperator A 1) :
  doubleDualEffectPairing F e =
    effectPrecompose (evaluationFiberSO_total hA F) e := by
set ? := evaluationFiberSO_total hA F
refine (superoperator_to_one_eq_of_comp_prep (fun sigma => ?)).symm
have hcol : Superoperator.comp ? sigma = doubleDualColumn hA F sigma :=
  evaluationFiberSO_total_comp_prep hA F sigma
have huni := doubleDualColumn_spec hA F sigma
calc Superoperator.comp (effectPrecompose ? e) sigma
  = Superoperator.comp (Superoperator.comp e ?) sigma := rfl
_ = Superoperator.comp e (Superoperator.comp ? sigma) :=
  (Superoperator.comp_assoc e ? sigma).symm
_ = Superoperator.comp e (doubleDualColumn hA F sigma) := by rw [hcol]
_ = effectPrecompose (doubleDualColumn hA F sigma) e := rfl
_ = doubleDualEffectPairing
  ((DayNegation.unit (representable A)).app 1 (doubleDualColumn hA F sigma)) e
:=
  (doubleDualEffectPairing_unit _ e).symm
_ = doubleDualEffectPairing
  ((DayNegation.neg (DayNegation.neg (representable A))).act F sigma) e := by
  rw [huni]
_ = Superoperator.comp (doubleDualEffectPairing F e) sigma := pairing_act_eq F
sigma e

```

#### 4.4.1247 Surjectivity of the representable module of the unit

**Statement.** For natural numbers  $A, n$ : if  $0 < A$ , then  $(\text{DayNegation.unit } (\text{representable } A)) \cdot \text{app } n$  is surjective.

**Proof.** Each component of the claim is established separately. It follows from the fact that the double dual equals the unit, assuming pairing.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean](#)

```
theorem representable_unit_surjective {A n : Nat} (hA : 0 < A) :
  Function.Surjective ((DayNegation.unit (representable A)).app n) := by
  intro F
  refine <evaluationFiberSO_total hA F, ?_>
  exact (doubleDual_eq_unit_of_pairing F (evaluationFiberSO_total hA F)
    (fun e => pairing_eq_evaluationFiberSO_total hA F e)).symm
```

#### 4.4.1248 Summability of the recover CP of the Choi matrix

**Statement.** For natural numbers  $A, n$ , a superoperator  $\chi$ : if  $0 < A$  and the family  $f$  sums to  $\chi$ , then the family  $\text{fun } i \Rightarrow (\text{recoverCP } hA (f \ i)).\text{choi}$  sums to  $(\text{recoverCP } hA \ \chi).\text{choi}$ .

**Proof.** The key step rewrites with the recover CP of the Choi matrix, the definition of the cup name CP, the pointwise formula for the effect as Choi and standard identities for matrices.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean](#)

```
theorem recoverCP_choi_hasSum {A n : Nat} (hA : 0 < A)
  {? : Type} [Countable ?]
  {f : ? -> Superoperator (n * A) 1} {chi : Superoperator (n * A) 1}
  (h : SigmaMon.ChoiSum.HasSum f chi) :
  _root_.HasSum (fun i => (recoverCP hA (f i)).choi)
    (recoverCP hA chi).choi := by
  apply Pi.hasSum.mpr; intro p
  apply Pi.hasSum.mpr; intro q
  have hentry (psi : Superoperator (n * A) 1) :
    (recoverCP hA psi).choi p q =
      (A : ?) * psi.cp.effect
        (finProdFinEquiv (q.2, q.1)) (finProdFinEquiv (p.2, p.1)) := by
    simp only [recoverCP_choi, cupNameCP, effectAsChoi_apply, Matrix.smul_apply]
  simp_rw [hentry]
  have heff (psi : Superoperator (n * A) 1) (i j : Fin (n * A)) :
    psi.cp.effect i j = psi.cp.choi ((0 : Fin 1), j) ((0 : Fin 1), i) := by
    simp [CPMap.effect, Fin.default_eq_zero]
  simp_rw [heff]
  have hchoi :=
    Pi.hasSum.mp (Pi.hasSum.mp h
      ((0 : Fin 1), finProdFinEquiv (p.2, p.1)))
      ((0 : Fin 1), finProdFinEquiv (q.2, q.1))
  simp [Complex.real_smul, smul_eq_mul] using hchoi.mul_left ((A : ?) : ?)
```

#### 4.4.1249 Naturality of the evaluation fiber superoperator of the totality

**Statement.** For natural numbers  $A, n, m$ , a superoperator  $f$ : if  $0 < A$ , then an explicit expression in the evaluation fiber superoperator totality, the negation and the representable module equals the composite of the evaluation fiber superoperator totality of  $hA$  and  $F$  after  $f$ .

**Proof.** The claim follows from a chain of equalities (or inequalities). The key step rewrites with the representable module of the act.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean](#)

```
theorem evaluationFiberSO_total_naturality {A n m : Nat} (hA : 0 < A)
  (F : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier)
  (f : Superoperator m n) :
  evaluationFiberSO_total hA
    ((DayNegation.neg (DayNegation.neg (representable A))).act F f) =
    Superoperator.comp (evaluationFiberSO_total hA F) f := by
  set ? := evaluationFiberSO_total hA F
  have hF : F = (DayNegation.unit (representable A)).app n ? :=
    doubleDual_eq_unit_of_pairing F ?
    (fun e => pairing_eq_evaluationFiberSO_total hA F e)
  have hnata := (DayNegation.unit (representable A)).naturality ? f
  -- hnata: unit.app m (act ? f) = act (unit.app n ?) f
  -- representable.act ? f = ? comp f
  have hnata' :
    (DayNegation.unit (representable A)).app m (Superoperator.comp ? f) =
    (DayNegation.neg (DayNegation.neg (representable A))).act
      ((DayNegation.unit (representable A)).app n ?) f := by
    simpa [representable_act] using hnata
  calc evaluationFiberSO_total hA
    ((DayNegation.neg (DayNegation.neg (representable A))).act F f)
    = evaluationFiberSO_total hA
      ((DayNegation.neg (DayNegation.neg (representable A))).act
        ((DayNegation.unit (representable A)).app n ?) f) := by rw [hF]
  _ = evaluationFiberSO_total hA
    ((DayNegation.unit (representable A)).app m (Superoperator.comp ? f)) :=
    hnata'.symm |> rfl
  _ = Superoperator.comp ? f := evaluationFiberSO_total_unit hA _
```

#### 4.4.1250 Definition of the representable double dual evaluation

**Definition.** The representable double dual evaluation of  $A$  is a module morphism.

**Construction.** Constructed by supplying each component: application, functorial action zero, functorial action sum and naturality. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean](#)

```
noncomputable def representableDoubleDualEvaluation (A : Nat) (hA : 0 < A) :
  Hom (DayNegation.neg (DayNegation.neg (representable A))) (representable A) where
  app := fun n F => evaluationFiberSO_total hA F
  map_zero := by
    intro n
    have hz :
      (0 : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).Carrier) =
      (DayNegation.unit (representable A)).app n 0 :=
      ((DayNegation.unit (representable A)).map_zero n).symm
    rw [hz]
  exact evaluationFiberSO_total_unit hA (0 : Superoperator n A)
```

```

map_sum := by
  intro ? _ n f x hf
  change SigmaMon.ChoiSum.HasSum
    (fun i => evaluationFiberSO_total hA (f i))
    (evaluationFiberSO_total hA x)
  have happ : SigmaMon.ChoiSum.HasSum
    (fun i => (f i).app (Superoperator.identity n) (normalizedCupProbe A hA))
    (x.app (Superoperator.identity n) (normalizedCupProbe A hA)) :=
    hf n A (Superoperator.identity n) (normalizedCupProbe A hA)
  -- convert to choi HasSum of recoverCP
  change _root_.HasSum
    (fun i => (evaluationFiberSO_total hA (f i)).cp.choi)
    (evaluationFiberSO_total hA x).cp.choi
  have hcp (G : ((DayNegation.neg (DayNegation.neg (representable A))).obj n).
  Carrier) :
    (evaluationFiberSO_total hA G).cp =
      recoverCP hA (G.app (Superoperator.identity n) (normalizedCupProbe A hA)) :=
    rfl
  simp_rw [hcp]
  exact recoverCP_choi_hasSum hA happ
natrality := by
  intro m n F f
  simpa [representable_act] using evaluationFiberSO_total_natrality hA F f

```

#### 4.4.1251 Representable double dual evaluation of the unit

**Statement.** For a natural number  $A$ : if  $0 < A$ , then the composite of the representable double dual evaluation of  $A$  and  $hA$  after the unit of `representable A` equals the identity of the representable module of  $A$ .

**Proof.** Both sides are compared pointwise (by extensionality). It follows from the extensionality for module morphisms and the totality of the evaluation fiber superoperator, at the unit.

**Lean 4 source** `QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean`

```

theorem representableDoubleDualEvaluation_unit (A : Nat) (hA : 0 < A) :
  Hom.comp (representableDoubleDualEvaluation A hA)
    (DayNegation.unit (representable A)) =
    Hom.id (representable A) := by
  apply Hom.ext
  intro n ?
  exact evaluationFiberSO_total_unit hA ?

```

#### 4.4.1252 Definition of the representable reflexivity of surjectivity

**Definition.** The representable reflexivity of surjectivity of  $A$  is an element of `Representable Reflexivity A`.

**Construction.** Constructed by supplying each component: inverse, morphism inverse and inverse morphism. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean](#)

```
noncomputable def representableReflexivityOfSurjective (A : Nat) (hA : 0 < A)
  (h : forall n, Function.Surjective ((DayNegation.unit (representable A)).app n))
  :
  RepresentableReflexivity A where
inv := representableDoubleDualEvaluation A hA
hom_inv := by
  apply Hom.ext
  intro n F
  obtain <x, rfl> := h n F
  have hret := congrArg
    (fun f : Hom (representable A) (representable A) => f.app n x)
    (representableDoubleDualEvaluation_unit A hA)
  exact congrArg ((DayNegation.unit (representable A)).app n) hret
inv_hom := representableDoubleDualEvaluation_unit A hA
```

#### 4.4.1253 Definition of the representable reflexivity

**Definition.** The representable reflexivity of A is an element of RepresentableReflexivity A.

**Construction.** Defined to be the representable reflexivity of surjectivity of A, hA, fun \_ => representable\_unit\_surjective hA.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean](#)

```
noncomputable def representableReflexivity (A : Nat) (hA : 0 < A) :
  RepresentableReflexivity A :=
  representableReflexivityOfSurjective A hA
  (fun _ => representable_unit_surjective hA)
```

#### 4.4.1254 Definition of the representable classical object

**Definition.** The representable classical object of A is a classical object.

**Construction.** Defined to be the representable biorthogonal object of A, hA, the representable reflexivity of A and hA.

**Lean 4 source** [QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean](#)

```
noncomputable def representableClassicalObject (A : Nat) (hA : 0 < A) :
  ClassicalObject DayNegation.data :=
  representableBiorthogonalObject A hA (representableReflexivity A hA)
```

```
/-! ### Retraction / reflexivity status
```

```
Defined: `normalizedCup`, `normalizedCupProbe`, `cupName`,
`evaluationFiber`, `effectPack`, `doubleDualEffectPairing`,
`bornScalar`, `effectExpectation`, `preparationOfDensity`,
`densityFromEffectPairing`, `exists_superoperator_of_effect_pairing`.
```

```

* **Retraction** `evaluation comp unit = id` on fibers: **proved**.
* **Cup-generation** for `A > 1`: **falsified** (single-probe path only).
* **Effect-family pairing on unit image**: **proved**
  (`doubleDualEffectPairing_unit`, `pairing_eq_imp_app_effectPack`,
  `effectExpectation_unit`, `effect_pairing_unique`).
* **n=1 analytic reconstruction**: packaging gate
  `exists_superoperator_of_effect_pairing` **proved** (density `?` as data);
  `preparationOfDensity` / Born extensionality for `1 -> 1` **proved**;
  `effectPairingQuad_unit` / `effectPairingQuad_nonneg` **proved**;
  double-dual Born calculus **proved**:
  `effectExpectation_add_doubleDual`, `effectExpectation_mono_doubleDual`,
  `effectExpectation_half_doubleDual`, `bornScalar_nonneg`,
  `effectExpectation_nsmul_doubleDual`, `effectExpectation_div_pow_two`,
  `effectExpectation_dyadic_doubleDual`, `effectExpectation_smul_doubleDual`
  (?-homogeneity on `[0,1]` via dyadic squeeze).
  Polarization foundations **proved**:
  `effectPairingQuad_smul`, `effectPairingPolar_self`,
  `effectPairingQuad_eq_expectation` (q(v)=b(|v><v|) when <= I),
  `vecMulVec_parallelogram` / `_I`,
  `vecMulVec_le_normSq_smul_one`, `effectPairingQuad_parallelogram` / `_I`,
  `effectPairingPolar_eq_ofNorm`, `effectPairingPolar_add_left`,
  `effectPairingPolar_zero_left`, `effectPairingPolar_nsmul_left`.
  Polar sesquilinearity **proved**: `conj_symm`, `add_right`, Int/?/`I`/?/?-smul,
  basis expansion, `density_quad_eq`, `densityFromDoubleDual_posSemidef`,
  `trace_density_le_one`.
  Born match **proved**: `born_match_density`.
  Preparation gate **proved**: `exists_preparation_of_doubleDual`.
  Lift **proved**: `effectPack_surjective`, `dualFiberBilinear_surjective`,
  `pairing_eq_imp_app_fiber_one`, `pairing_eq_imp_app_id`,
  `doubleDual_eq_unit_of_pairing`, `representable_unit_surjective_one`.
* Column / cup-evaluation scaffolding **proved**:
  `choi_tensor_prep_id`, `effect_comp_tensor_prep`, `recoverCP_comp_tensor`,
  `act_app_id_cup`, `app_cupProbe_pullback`, `evaluationFiber_act`,
  `doubleDualColumn`, `evaluationFiber_column`,
  `evaluationFiber_traceNonincreasing`, `evaluationFiberSQ_total`,
  `pairing_coherence`.
* `A > 0` bipolar: **CLOSED** (`RepresentableReflexivity A` / `
  representableClassicalObject`)
  (`superoperator_mul_eq_of_tensor_prep`, general pairing lift,
  `representable_unit_surjective`, `representableDoubleDualEvaluation`,
  `representableReflexivity`, `representableClassicalObject`).
-/

```

#### 4.4.1255 Definition of the summability

**Definition.** A family of TNI superoperators has sum  $\Phi$  when its intrinsic Choi matrices converge unconditionally to  $\Phi$ 's Choi matrix.

**Construction.** Defined to be `_root_.HasSum (fun i => (f i).cp.choi)  $\Phi$ .cp.choi`.

**Lean 4 source** `QLambda/Domain/Presheaf/SigmaMon.lean`

```

def HasSum {? : Type} [Countable ?]
  (f : ? -> Superoperator n m) (? : Superoperator n m) : Prop :=
  _root_.HasSum (fun i => (f i).cp.choi) ?.cp.choi

```

#### 4.4.1256 Uniqueness of countable Choi sums

**Statement.** For superoperators  $\Phi, \Psi$ : if the family  $f$  sums to  $\Phi$  and the family  $f$  sums to  $\Psi$ , then  $\Phi = \Psi$ .

**Proof.** Both sides are compared pointwise (by extensionality). It follows from the extensionality for superoperators, the extensionality for completely positive maps and the hypothesis that the family  $f$  sums to  $\Phi$ .

**Lean 4 source** `QLambda/Domain/Presheaf/SigmaMon.lean`

```
theorem unique {α : Type} [Countable α] {f : α → Superoperator n m}
  {g : α → Superoperator n m} (h : HasSum f g) (h' : HasSum f g) :
  f = g := by
  apply Superoperator.ext
  apply CPMMap.ext
  exact h.unique h'
```

#### 4.4.1257 Empty for countable Choi sums

**Statement.** The family  $\text{fun } i \text{ sums to } 0$ . Formally:  $\text{HasSum } \text{fun } i \text{ } 0$ .

**Proof.** It follows from the summability of the empty family for module morphisms.

**Lean 4 source** `QLambda/Domain/Presheaf/SigmaMon.lean`

```
theorem empty :
  HasSum (fun i : Empty => nomatch i) (0 : Superoperator n m) := by
  exact hasSum_empty
```

#### 4.4.1258 Singleton for countable Choi sums

**Statement.** For a superoperator  $\Phi$ : the family  $\text{fun } _ \text{ sums to } \Phi$ . Formally:  $\text{HasSum } \text{fun } _ \Phi$ .

**Proof.** The claim follows directly from the definitions of the objects involved.

**Lean 4 source** `QLambda/Domain/Presheaf/SigmaMon.lean`

```
theorem singleton (α : Superoperator n m) :
  HasSum (fun _ : PUnit => α) α := by
  exact hasSum_single PUnit.unit
  (fun i hi => (hi (Subsingleton.elim i PUnit.unit)).elim)
```

#### 4.4.1259 Remove of zero for countable Choi sums

**Statement.** For a superoperator  $\Phi$ : if if for every  $i, i \notin s$ , then  $f i = 0$ , then the family  $\text{fun } i \text{ sums to } \Phi$  if and only if the family  $f$  sums to  $\Phi$ .

**Proof.** The key step rewrites with the hypothesis that if for every  $i, i \notin s$ , then  $f i = 0$  and standard identities for subtypes.

**Lean 4 source** `QLambda/Domain/Presheaf/SigmaMon.lean`

```

theorem remove_zero {? : Type} [Countable ?]
  (f : ? -> Superoperator n m) (s : Set ?) (? : Superoperator n m)
  (hzero : forall i, i notin s -> f i = 0) :
  HasSum (fun i : s => f i) ? <-> HasSum f ? := by
change
  _root_.HasSum
    ((fun i => (f i).cp.choi) comp (fun i : s => (i : ?))) ? .cp.choi <->
    _root_.HasSum (fun i => (f i).cp.choi) ? .cp.choi
apply Subtype.val_injective.hasSum_iff
intro i hi
have his : i notin s := by
  simpa using hi
rw [hzero i his]
rfl

```

#### 4.4.1260 Reindexing for countable Choi sums

**Statement.** For a superoperator  $\Phi$ : the family  $f \circ e$  sums to  $\Phi$  if and only if the family  $f$  sums to  $\Phi$ .

**Proof.** The claim follows directly from the definitions of the objects involved.

**Lean 4 source** [QLambda/Domain/Presheaf/SigmaMon.lean](#)

```

theorem reindex {? ? : Type} [Countable ?] [Countable ?]
  (e : ? ? ?) (f : ? -> Superoperator n m) (? : Superoperator n m) :
  HasSum (f comp e) ? <-> HasSum f ? := by
change
  _root_.HasSum ((fun i => (f i).cp.choi) comp e) ? .cp.choi <->
  _root_.HasSum (fun i => (f i).cp.choi) ? .cp.choi
exact e.hasSum_iff

```

#### 4.4.1261 Tensoring on the right preserves every defined Choi sum

**Statement.** Tensoring on the right preserves every defined Choi sum. Formally:  $\text{HasSum } (\text{fun } i \Rightarrow \text{Superoperator.tensor } (f \ i) \ \Psi) \ (\text{Superoperator.tensor } \Phi \ \Psi)$ .

**Proof.** Both sides are compared pointwise (by extensionality). The goal is simplified using standard identities for matrices and the hypothesis that the family  $f$  sums to  $\Phi$ .

**Lean 4 source** [QLambda/Domain/Presheaf/SigmaMon.lean](#)

```

theorem tensor_hasSum_left {? : Type} [Countable ?]
  {f : ? -> Superoperator n m} {? : Superoperator n m}
  (h : HasSum f ?) (? : Superoperator ? r) :
  HasSum (fun i => Superoperator.tensor (f i) ?)
    (Superoperator.tensor ? ?) := by
let T : Matrix (Fin m x Fin n) (Fin m x Fin n) ? -> ?[?]
  Matrix (Fin (m * r) x Fin (n * ?))
    (Fin (m * r) x Fin (n * ?)) ? :=
{ toFun := fun A =>
  Matrix.reindex (CPMap.choiTensorEquiv n m ? r)
    (CPMap.choiTensorEquiv n m ? r) (A ??? .cp.choi)
  map_add' := by
    intro A B

```



```

    ext i j
    simp [Matrix.reindex_apply, Matrix.add_kronecker]
map_smul' := by
  intro c A
  ext i j
  simp [Matrix.reindex_apply, Matrix.smul_kronecker] }
change _root_.HasSum (fun i => T (f i).cp.choi) (T ?.cp.choi)
exact h.map T (LinearMap.continuous_of_finiteDimensional T)

```

#### 4.4.1262 Tensoring on the left preserves every defined Choi sum

**Statement.** Tensoring on the left preserves every defined Choi sum. Formally:  $\text{HasSum } (\text{fun } i \Rightarrow \text{Superoperator.tensor } \Phi \text{ (f } i)) \text{ (Superoperator.tensor } \Phi \Psi)$ .

**Proof.** Both sides are compared pointwise (by extensionality). The goal is simplified using standard identities for matrices and the hypothesis that the family  $f$  sums to  $\Psi$ .

#### Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```

theorem tensor_hasSum_right {? : Type} [Countable ?]
  (? : Superoperator n m) {f : ? -> Superoperator ? r}
  {? : Superoperator ? r} (h : HasSum f ?) :
  HasSum (fun i => Superoperator.tensor ? (f i))
    (Superoperator.tensor ? ?) := by
let T : Matrix (Fin r x Fin ?) (Fin r x Fin ?) ? -> ?[?]
  Matrix (Fin (m * r) x Fin (n * ?))
  (Fin (m * r) x Fin (n * ?)) ? :=
{ toFun := fun A =>
  Matrix.reindex (CPMap.choiTensorEquiv n m ? r)
    (CPMap.choiTensorEquiv n m ? r) (?.cp.choi ?? A)
  map_add' := by
    intro A B
    ext i j
    simp [Matrix.reindex_apply, Matrix.kronecker_add]
  map_smul' := by
    intro c A
    ext i j
    simp [Matrix.reindex_apply, Matrix.kronecker_smul] }
change _root_.HasSum (fun i => T (f i).cp.choi) (T ?.cp.choi)
exact h.map T (LinearMap.continuous_of_finiteDimensional T)

```

#### 4.4.1263 Group for countable Choi sums

**Statement.** The unconditional sum of a flattened positive family can be regrouped into any countable family of already-defined row sums. Formally:  $\text{HasSum } g \Phi$ .

**Proof.** The proof term combines the facts named in it directly.

#### Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```

theorem group {? : Type} [Countable ?] {? : ? -> Type}
  [forall i, Countable (? i)] (f : (i : ?) -> ? i -> Superoperator n m)
  (g : ? -> Superoperator n m) (? : Superoperator n m)
  (hflat : HasSum (fun p : Sigma i, ? i => f p.1 p.2) ?)

```

```

(hrows : forall i, HasSum (f i) (g i)) :
HasSum g ? :=
_root_.HasSum.sigma hflat hrows

```

#### 4.4.1264 Flatten for countable Choi sums, assuming summability

**Statement.** Conversely, row sums can be flattened when absolute/unconditional summability of the flattened Choi family has been established. Formally:  $\text{HasSum } \text{fun } p \ \Phi$ .

**Proof.** The proof term combines the facts named in it directly.

##### Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```

theorem flatten_of_summable {α : Type} [Countable α] {β : α → Type}
[forall i, Countable (β i)] (f : (i : α) → β i → Superoperator n m)
(g : α → Superoperator n m) (hg : HasSum g ?)
(hrows : forall i, HasSum (f i) (g i)) (hg : HasSum g ?)
(hflat : Summable (fun p : Sigma i, β i => (f p.1 p.2).cp.choi)) :
HasSum (fun p : Sigma i, β i => f p.1 p.2) ? :=
_root_.HasSum.sigma_of_hasSum hg hrows hflat

```

#### 4.4.1265 Nonnegativity of the diagonal real part

**Statement.** For a matrix A: if A is positive semidefinite, then  $0 \leq (A \ i \ i).re$ .

**Proof.** The proof term combines the facts named in it directly.

##### Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```

theorem diag_re_nonneg {q : Type} [Fintype q]
{A : Matrix q q ?} (hA : A.PosSemidef) (i : q) :
0 <= (A i i).re :=
(RCLike.nonneg_iff.mp hA.diag_nonneg).1

```

#### 4.4.1266 The diagonal imaginary part vanishes

**Statement.** For a matrix A: if A is positive semidefinite, then  $(A \ i \ i).im = 0$ .

**Proof.** The proof term combines the facts named in it directly.

##### Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```

theorem diag_im_eq_zero {q : Type} [Fintype q]
{A : Matrix q q ?} (hA : A.PosSemidef) (i : q) :
(A i i).im = 0 :=
(RCLike.nonneg_iff.mp hA.diag_nonneg).2

```

#### 4.4.1267 The diagonal real part is bounded by trace of the real part

**Statement.** For a matrix A: if A is positive semidefinite, then  $(A \ i \ i).re \leq A.trace.re$ .

**Proof.** The key step rewrites with standard identities for finite sums.

##### Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```

theorem diag_re_le_trace_re {q : Type} [Fintype q]
  {A : Matrix q q ?} (hA : A.PosSemidef) (i : q) :
  (A i i).re <= A.trace.re := by
  rw [show A.trace.re = ? j, (A j j).re by simp [Matrix.trace]]
  exact Finset.single_le_sum
    (fun j _ => diag_re_nonneg hA j) (Finset.mem_univ i)

```

#### 4.4.1268 Nonnegativity of the trace of the real part

**Statement.** For a matrix  $A$ : if  $A$  is positive semidefinite, then  $0 \leq A.\text{trace}.\text{re}$ .

**Proof.** The proof term combines the facts named in it directly.

**Lean 4 source** `QLambda/Domain/Presheaf/SigmaMon.lean`

```

theorem trace_re_nonneg {q : Type} [Fintype q]
  {A : Matrix q q ?} (hA : A.PosSemidef) :
  0 <= A.trace.re :=
  (RCLike.nonneg_iff.mp hA.trace_nonneg).1

```

#### 4.4.1269 Every entry of a positive semidefinite matrix is bounded by its trace

**Statement.** Every entry of a positive semidefinite matrix is bounded by its trace. This is the finite-dimensional order-unit estimate used below to turn trace summability into norm summability. Formally:  $\|A\ i\ j\| \leq A.\text{trace}.\text{re}$ .

**Proof.** The key step rewrites with standard identities for matrices, the hypothesis that  $A$  is positive semidefinite, standard identities for complex numbers and the fact that the diagonal imaginary part vanishes. The remaining inequalities follow by linear arithmetic.

**Lean 4 source** `QLambda/Domain/Presheaf/SigmaMon.lean`

```

theorem entry_norm_le_trace_re {q : Type} [Fintype q] [DecidableEq q]
  {A : Matrix q q ?} (hA : A.PosSemidef) (i j : q) :
  ?A i j? <= A.trace.re := by
  let e : Fin 2 -> q := ![i, j]
  have hdet_re := (RCLike.nonneg_iff.mp (hA.submatrix e).det_nonneg).1
  rw [Matrix.det_fin_two] at hdet_re
  simp only [Matrix.submatrix_apply, e, Matrix.cons_val_zero,
    Matrix.cons_val_one] at hdet_re
  have hherm : A j i = star (A i j) := by
    rw [← hA.isHermitian.apply]
  rw [hherm] at hdet_re
  change 0 <= (A i i * A j j - A i j * star (A i j)).re at hdet_re
  rw [Complex.sub_re] at hdet_re
  have hmul :
    (A i j * star (A i j)).re = Complex.normSq (A i j) := by
    change (A i j * (starRingEnd ?) (A i j)).re = _
    rw [Complex.mul_conj]
    simp
  rw [hmul, Complex.mul_re, diag_im_eq_zero hA i,
    diag_im_eq_zero hA j, Complex.normSq_apply] at hdet_re
  simp only [mul_zero, sub_zero] at hdet_re
  have hii := diag_re_nonneg hA i

```

```

have hjj := diag_re_nonneg hA j
have hit := diag_re_le_trace_re hA i
have hjt := diag_re_le_trace_re hA j
have htr := trace_re_nonneg hA
have hsq := Complex.sq_norm (A i j)
rw [Complex.normSq_apply] at hsq
have hprod :
  (A i i).re * (A j j).re <= A.trace.re ^ 2 := by
  nlinarith
have hnormsq : ?A i j? ^ 2 <= A.trace.re ^ 2 := by
  nlinarith
nlinarith [norm_nonneg (A i j)]

```

#### 4.4.1270 Summability of the trace of the real part

**Statement.** For a matrix  $A$ : if the family  $f$  sums to  $A$ , then the family  $\text{fun } i \Rightarrow (f \ i).trace.re$  sums to  $A.trace.re$ .

**Proof.** It follows from the hypothesis that the family  $f$  sums to  $A$  and the functorial action for observational equalities.

**Lean 4 source** [QLambda/Domain/Presheaf/SigmaMon.lean](#)

```

theorem hasSum_trace_re {? q : Type} [Fintype q]
  {f : ? -> Matrix q q ?} {A : Matrix q q ?}
  (hf : _root_.HasSum f A) :
  _root_.HasSum (fun i => (f i).trace.re) A.trace.re := by
have hc : _root_.HasSum (fun i => (f i).trace) A.trace := by
  convert hf.map (Matrix.traceLinearMap q ? ?)
  (LinearMap.continuous_of_finiteDimensional _) using 1 <|> rfl
convert hc.map Complex.reCLM Complex.reCLM.continuous using 1 <|> rfl

```

#### 4.4.1271 The positive semidefinite cone of finite complex matrices is closed under unconditional sums

**Statement.** The positive semidefinite cone of finite complex matrices is closed under unconditional sums. Formally:  $A.PosSemidef$ .

**Proof.** Both sides are compared pointwise (by extensionality). Each component of the claim is established separately. The key step rewrites with standard identities for matrices, the extensionality for bilinear maps, the uniqueness of countable Choi sums and standard identities for infinite sums.

**Lean 4 source** [QLambda/Domain/Presheaf/SigmaMon.lean](#)

```

theorem hasSum_posSemidef {? q : Type} [Fintype q]
  {f : ? -> Matrix q q ?} {A : Matrix q q ?}
  (hf : _root_.HasSum f A) (hp : forall i, (f i).PosSemidef) :
  A.PosSemidef := by
rw [Matrix.posSemidef_iff_dotProduct_mulVec]
constructor
* apply Matrix.IsHermitian.ext
intro i j
have hij : _root_.HasSum (fun k => f k i j) (A i j) :=
  Pi.hasSum.mp (Pi.hasSum.mp hf i) j
have hji : _root_.HasSum (fun k => f k j i) (A j i) :=

```

```

    Pi.hasSum.mp (Pi.hasSum.mp hf j) i
  have hs : _root_.HasSum (fun k => f k i j) (star (A j i)) :=
    hji.star.congr_fun fun k => (hp k).isHermitian.apply i j |>.symm
  exact hs.unique hij
* intro x
  have hentry (i j : q) :
    _root_.HasSum (fun k => f k i j) (A i j) :=
    Pi.hasSum.mp (Pi.hasSum.mp hf i) j
  have hterm (i j : q) :
    _root_.HasSum (fun k => star (x i) * f k i j * x j)
      (star (x i) * A i j * x j) :=
    ((hentry i j).mul_left (star (x i))).mul_right (x j)
  have hsrw :
    _root_.HasSum
      (fun k => ? i, ? j, star (x i) * f k i j * x j)
      (? i, ? j, star (x i) * A i j * x j) :=
    hasSum_sum fun i _ => hasSum_sum fun j _ => hterm i j
  have hs :
    _root_.HasSum (fun k => star x ?? (f k *? x))
      (star x ?? (A *? x)) := by
    simpa only [dotProduct, mulVec, Finset.mul_sum, mul_assoc,
      Pi.star_apply] using hsrw
  apply RCLike.nonneg_iff.mpr
  constructor
* exact HasSum.nonneg (fun k => (hp k).re_dotProduct_nonneg x)
  ((Complex.hasSum_iff _ _).mp hs).1
* have him := ((Complex.hasSum_iff _ _).mp hs).2
  apply him.unique
  exact hasSum_zero.congr_fun fun k =>
    (RCLike.nonneg_iff.mp ((hp k).dotProduct_mulVec_nonneg x)).2

```

#### 4.4.1272 Definition of the row equivalence of countable Choi sums

**Definition.** The row equivalence of  $i$  is an element of  $\kappa \ i \simeq \{p : \Sigma \ i, \ \kappa \ i \ // \ p.1 = i\}$ .

**Construction.** Constructed by supplying each component: right inverse. The accompanying laws are verified from the definitions.

#### Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```

private noncomputable def rowEquiv {? : Type} {? : ? -> Type} (i : ?) :
  ? i ? {p : Sigma i, ? i // p.1 = i} where
  toFun j := <<i, j>, rfl>
  invFun p := by
    rcases p with <<i', j>, h>
    change i' = i at h
    cases h
    exact j
  left_inv _ := rfl
  right_inv := by
    rintro <<i', j>, h>
    change i' = i at h
    cases h
    rfl

```

#### 4.4.1273 Definition of the subfamily closed term

**Definition.** Closure under countable subfamilies is one of the two finite-dimensional positivity facts needed for full countable associativity.

**Construction.** Defined by an explicit formula built from the superoperator and the summability.

**Lean 4 source** `QLambda/Domain/Presheaf/SigmaMon.lean`

```
def SubfamilyClosed : Prop :=
  forall {? : Type} [Countable ?] {? : ? -> Type}
    [forall i, Countable (? i)] (f : (i : ?) -> ? i -> Superoperator n m)
    (? : Superoperator n m),
    HasSum (fun p : Sigma i, ? i => f p.1 p.2) ? ->
      forall i, exists ?, HasSum (f i) ?
```

#### 4.4.1274 Regrouping completeness is the second positivity fact

**Definition.** Regrouping completeness is the second positivity fact: summable positive rows with a summable family of row sums have a summable flattening.

**Construction.** Defined by an explicit formula built from the superoperator and the summability.

**Lean 4 source** `QLambda/Domain/Presheaf/SigmaMon.lean`

```
def RegroupingComplete : Prop :=
  forall {? : Type} [Countable ?] {? : ? -> Type}
    [forall i, Countable (? i)] (f : (i : ?) -> ? i -> Superoperator n m)
    (g : ? -> Superoperator n m),
    (forall i, HasSum (f i) (g i)) ->
      Summable (fun i => (g i).cp.choi) ->
      Summable (fun p : Sigma i, ? i => (f p.1 p.2).cp.choi)
```

#### 4.4.1275 Subfamily closed term for countable Choi sums

**Statement.** Countable subfamilies of a convergent family of positive Choi matrices again converge to a trace-nonincreasing completely positive map. Formally: `SubfamilyClosed (n := n) (m := m)`.

**Proof.** Both sides are compared pointwise (by extensionality). The claim follows from a chain of equalities (or inequalities). Each component of the claim is established separately. The key step rewrites with the definition of the `f`, standard identities for functions, the definition of `a` and the definition of the row equivalence.

**Lean 4 source** `QLambda/Domain/Presheaf/SigmaMon.lean`

```
theorem subfamilyClosed : SubfamilyClosed (n := n) (m := m) := by
  classical
  intro ? _ ? _ f ? hflat i
  let F : (Sigma i, ? i) -> Matrix (Fin m x Fin n) (Fin m x Fin n) ? :=
    fun p => (f p.1 p.2).cp.choi
  have hF : _root_.HasSum F ? cp.choi := hflat
  have hFs : Summable F := hF.summable
  have hinj : Function.Injective (fun j : ? i => Sigma.mk i j) := by
    intro a b h
```

```

    exact eq_of_heq (Sigma.mk.inj h).2
have hrow : Summable (fun j : ? i => (f i j).cp.choi) := by
  simpa [F, Function.comp_def] using hFs.comp_injective hinj
let A := ?' j : ? i, (f i j).cp.choi
have hA : _root_.HasSum (fun j : ? i => (f i j).cp.choi) A :=
  hrow.hasSum
have hApos : A.PosSemidef :=
  hasSum_posSemidef hA (fun j => (f i j).cp.choi_pos)
let B := ?' p : Set.compl {p : Sigma i, ? i | p.1 = i}, F p
have hcomp :
  Summable
    (fun p : Set.compl {p : Sigma i, ? i | p.1 = i} => F p) :=
  hFs.subtype _
have hBpos : B.PosSemidef :=
  hasSum_posSemidef hcomp.hasSum (fun p => (f p.1.1 p.1.2).cp.choi_pos)
have hrow_subtype :
  A = ?' p : {p : Sigma i, ? i // p.1 = i}, F p := by
  simpa [A, F, rowEquiv] using
    (rowEquiv i).tsum_eq
    (fun p : {p : Sigma i, ? i // p.1 = i} => F p)
have hAB : A + B = ?.cp.choi := by
  rw [hrow_subtype]
  have hdecomp :=
    hFs.tsum_subtype_add_tsum_subtype_compl
    {p : Sigma i, ? i | p.1 = i}
  change
    (?' p : {p : Sigma i, ? i // p.1 = i}, F p) + B =
    ?' p, F p at hdecomp
  exact hdecomp.trans hF.tsum_eq
let ?cp : CPMat n m := <A, hApos>
let ?cp : CPMat n m := <B, hBpos>
have hcp : ?cp + ?cp = ?.cp := by
  apply CPMat.ext
  exact hAB
let ? : Superoperator n m :=
  { cp := ?cp
    trace_nonincreasing := by
      intro ? h?
      have h?pos := CPMat.applyMat_posSemidef ?cp h?
      have h?tr := (RCLike.nonneg_iff.mp h?pos.trace_nonneg).1
      have happly :
        ?.cp.applyMat ? = ?cp.applyMat ? + ?cp.applyMat ? := by
          rw [← hcp, CPMat.applyMat_add_map]
      calc
        (Matrix.trace (?cp.applyMat ?)).re
          <= (Matrix.trace
            (?cp.applyMat ? + ?cp.applyMat ?)).re := by
            rw [Matrix.trace_add, Complex.add_re]
            exact le_add_of_nonneg_right h?tr
        _ = (Matrix.trace (?cp.applyMat ?)).re := by
            rw [← happly]
        _ <= (Matrix.trace ?).re :=
            ?.trace_nonincreasing ? h? }
  exact <?, hA>

```

#### 4.4.1276 Every countable subfamily of a defined Choi sum has a defined TNI sum

**Statement.** Every countable subfamily of a defined Choi sum has a defined TNI sum. This direct form is convenient for finite approximants and branch selection. Formally:  $\exists \Psi : \text{Superoperator } n \ m, \text{HasSum fun } i \ \Psi$ .

**Proof.** Both sides are compared pointwise (by extensionality). The claim follows from a chain of equalities (or inequalities). Each component of the claim is established separately. The key step rewrites with the definition of a, the definition of the Boolean, the action on a matrix of a sum of a mapped family and standard identities for matrices.

#### Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```
theorem subfamily_hasSum {? : Type} [Countable ?]
  {f : ? -> Superoperator n m} {? : Superoperator n m}
  (h? : HasSum f ?) (s : Set ?) :
  exists ? : Superoperator n m, HasSum (fun i : s => f i) ? := by
  classical
  let F : ? -> Matrix (Fin m x Fin n) (Fin m x Fin n) ? :=
    fun i => (f i).cp.choi
  have hF : _root_.HasSum F ?.cp.choi := h?
  have hFs : Summable F := hF.summable
  let A := ?' i : s, F i
  let B := ?' i : (s? : Set ?), F i
  have hAs : Summable (fun i : s => F i) := hFs.subtype s
  have hBs : Summable (fun i : (s? : Set ?) => F i) :=
    hFs.subtype s?
  have hA : _root_.HasSum (fun i : s => F i) A := hAs.hasSum
  have hB : _root_.HasSum (fun i : (s? : Set ?) => F i) B :=
    hBs.hasSum
  have hApos : A.PosSemidef :=
    hasSum_posSemidef hA (fun i => (f i).cp.choi_pos)
  have hBpos : B.PosSemidef :=
    hasSum_posSemidef hB (fun i => (f i).cp.choi_pos)
  have hAB : A + B = ?.cp.choi := by
    have hdecomp := hFs.tsum_subtype_add_tsum_subtype_compl s
    calc
      A + B = ?' i, F i := by simpa [A, B] using hdecomp
      _ = ?.cp.choi := hF.tsum_eq
  let ?cp : CPMMap n m := <A, hApos>
  let ?cp : CPMMap n m := <B, hBpos>
  have hcp : ?cp + ?cp = ?cp := by
    apply CPMMap.ext
    exact hAB
  let ? : Superoperator n m :=
    { cp := ?cp
      trace_nonincreasing := by
        intro ? h?
        have h?pos := CPMMap.applyMat_posSemidef ?cp h?
        have h?tr := (RCLike.nonneg_iff.mp h?pos.trace_nonneg).1
        have happly :
          ?.cp.applyMat ? =
            ?cp.applyMat ? + ?cp.applyMat ? := by
          rw [← hcp, CPMMap.applyMat_add_map]
        calc
          (Matrix.trace (?cp.applyMat ?)).re
```



```

      <= (Matrix.trace
        (?cp.applyMat ? + ?cp.applyMat ?)).re := by
      rw [Matrix.trace_add, Complex.add_re]
      exact le_add_of_nonneg_right h?tr
    _ = (Matrix.trace (?cp.applyMat ?)).re := by
      rw [ <- happly]
    _ <= (Matrix.trace ?).re :=
      ?.trace_nonincreasing ? h? }
  refine <?, ?_>
  exact hA

```

#### 4.4.1277 Every finite approximant of a defined countable Choi sum is itself a defined TNI sum

**Statement.** Every finite approximant of a defined countable Choi sum is itself a defined TNI sum. Formally:  $\exists \Psi : \text{Superoperator } n \ m, \text{ HasSum } \text{fun } i \ \Psi.$

**Proof.** This is an instance of the fact that every countable subfamily of a defined Choi sum has a defined TNI sum, applied to the hypothesis that the family  $f$  sums to  $\Phi$ .

**Lean 4 source** [QLambda/Domain/Presheaf/SigmaMon.lean](#)

```

theorem finite_subfamily_hasSum {? : Type} [Countable ?]
  {f : ? -> Superoperator n m} {? : Superoperator n m}
  (h? : HasSum f ?) (s : Finset ?) :
  exists ? : Superoperator n m,
    HasSum (fun i : {i // i in s} => f i) ? :=
  subfamily_hasSum h? {i | i in s}

```

#### 4.4.1278 Choi matrix of a finite sum of a finite sum

**Statement.**  $(\sum i \in s, f \ i).choi = \sum i \in s, (f \ i).choi$ . Formally:  $(\sum i \in s, f \ i).choi = \sum i \in s, (f \ i).choi$ .

**Proof.** The argument proceeds by induction. The goal is closed by simplification with the defining equations.

**Lean 4 source** [QLambda/Domain/Presheaf/SigmaMon.lean](#)

```

private theorem choi_finset_sum {? : Type} [DecidableEq ?]
  (s : Finset ?) (f : ? -> CPMMap n m) :
  (? i in s, f i).choi = ? i in s, (f i).choi := by
  induction s using Finset.induction with
  | empty => simp
  | @insert a s ha ih => simp [ha, ih]

```

#### 4.4.1279 The intrinsic CP map of a finite approximant is the ordinary finite sum of the selected branch CP maps

**Statement.** The intrinsic CP map of a finite approximant is the ordinary finite sum of the selected branch CP maps. Formally:  $\exists \Psi : \text{Superoperator } n \ m, \ \Psi.cp = \sum i \in s, (f \ i).cp.$

**Proof.** Both sides are compared pointwise (by extensionality). The claim follows from a chain of equalities (or inequalities). Each component of the claim is established separately. The hypotheses are unpacked into their constituent data. The key step rewrites with standard identities for finite sums, the extensionality for completely positive maps and the Choi matrix of a finite sum of a finite sum.

#### Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```
theorem finite_subfamily_cp_sum {? : Type} [Countable ?]
  {f : ? -> Superoperator n m} {? : Superoperator n m}
  (h? : HasSum f ?) (s : Finset ?) :
  exists ? : Superoperator n m,
    ?.cp = ? i in s, (f i).cp := by
classical
obtain <?, h?> := finite_subfamily_hasSum h? s
refine <?, ?_>
apply CPMMap.ext
have ht :
  (? i : {i // i in s}, (f i).cp.choi) = ?.cp.choi :=
  h?.tsum_eq
calc
  ?.cp.choi =
    ? i : {i // i in s}, (f i).cp.choi := by
      rw [← ht, tsum_fintype]
  _ = (? i : {i // i in s}, (f i).cp).choi := by
    exact (choi_finset_sum Finset.univ
      (fun i : {i // i in s} => (f i).cp)).symm
  _ = (? i in s, (f i).cp).choi := by
    rw [Finset.sum_subtype (p := fun i => i in s)]
    simp
```

#### 4.4.1280 Positive row sums cannot hide conditional cancellation

**Statement.** Positive row sums cannot hide conditional cancellation: scalar Tonelli for their nonnegative traces, together with the PSD trace bound, makes the flattened Choi family summable. Formally: `RegroupingComplete (n := n) (m := m)`.

**Proof.** By case analysis on `hg`. It follows from the summability of the trace of the real part, the definition of the congruence, standard identities for infinite sums and the fact that every entry of a positive semidefinite matrix is bounded by its trace.

#### Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```
theorem regroupingComplete :
  RegroupingComplete (n := n) (m := m) := by
intro ? _ ? _ f g hrows hg
let T : (p : Sigma i, ? i) -> ? :=
  fun p => (Matrix.trace (f p.1 p.2).cp.choi).re
have hTnonneg : forall p, 0 <= T p :=
  fun p => trace_re_nonneg (f p.1 p.2).cp.choi_pos
have hrowTrace (i : ?) :
  _root_.HasSum (fun j => T <i, j>)
    (Matrix.trace (g i).cp.choi).re :=
  hasSum_trace_re (hrows i)
have hgTrace :
```

```

    Summable (fun i => (Matrix.trace (g i).cp.choi).re) := by
    rcases hg with <G, hG>
    exact (hasSum_trace_re hG).summable
have hT : Summable T := by
  apply (summable_sigma_of_nonneg hTnonneg).2
  refine <fun i => (hrowTrace i).summable, ?_>
  exact hgTrace.congr fun i => (hrowTrace i).tsum_eq.symm
apply Pi.summable.mpr
intro a
apply Pi.summable.mpr
intro b
apply Summable.of_norm_bounded hT
intro p
exact entry_norm_le_trace_re (f p.1 p.2).cp.choi_pos a b

```

#### 4.4.1281 Package the Choi relation once subfamily closure and regrouping completeness have been proved

**Definition.** Package the Choi relation once subfamily closure and regrouping completeness have been proved.

**Construction.** Constructed by supplying each component: summability, uniqueness, empty, singleton, remove zero, reindexing and flatten. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/Presheaf/SigmaMon.lean](#)

```

def partialCountableSum (hsub : SubfamilyClosed (n := n) (m := m))
  (hregroup : RegroupingComplete (n := n) (m := m)) :
  PartialCountableSum (Superoperator n m) where
HasSum := HasSum
unique := unique
empty := empty
singleton := singleton
remove_zero := remove_zero
reindex := reindex
flatten := by
  intro ? _ ? _ f ?
  constructor
  * intro hflat
    choose g hg using fun i => hsub f ? hflat i
    exact <g, hg, group f g ? hflat hg>
  * rintro <g, hrows, hg>
    exact flatten_of_summable f g ? hrows hg
    (hregroup f g hrows hg.summable)

```

#### 4.4.1282 Definition of the summability

**Definition.** The summability of  $f$  and  $\Phi$  is a proposition-valued predicate, defined below.

**Construction.** Defined to be `_root_.HasSum (fun i => (f i).choi)  $\Phi$ .choi`.

**Lean 4 source** [QLambda/Domain/Presheaf/SigmaMon.lean](#)

```
def HasSum {? : Type} [Countable ?]
  (f : ? -> CMap n m) (? : CMap n m) : Prop :=
  _root_.HasSum (fun i => (f i).choi) ?.choi
```

#### 4.4.1283 Uniqueness of countable sums of CP maps

**Statement.** For completely positive maps  $\Phi, \Psi$ : if the family  $f$  sums to  $\Phi$  and the family  $f$  sums to  $\Psi$ , then  $\Phi = \Psi$ .

**Proof.** This is an instance of the extensionality for completely positive maps, applied to the uniqueness of countable Choi sums.

**Lean 4 source** [QLambda/Domain/Presheaf/SigmaMon.lean](#)

```
theorem unique {? : Type} [Countable ?] {f : ? -> CMap n m}
  {? ? : CMap n m} (h? : HasSum f ?) (h? : HasSum f ?) :
  ? = ? :=
  CMap.ext (h?.unique h?)
```

#### 4.4.1284 Empty for countable sums of CP maps

**Statement.** The family  $\text{fun } i \text{ sums to } 0$ . Formally:  $\text{HasSum fun } i \text{ } 0$ .

**Proof.** This is an instance of the summability of the empty family for module morphisms.

**Lean 4 source** [QLambda/Domain/Presheaf/SigmaMon.lean](#)

```
theorem empty :
  HasSum (fun i : Empty => nomatch i) (0 : CMap n m) :=
  hasSum_empty
```

#### 4.4.1285 Singleton for countable sums of CP maps

**Statement.** For a completely positive map  $\Phi$ : the family  $\text{fun } \_ \text{ sums to } \Phi$ .

**Proof.** The proof term combines the facts named in it directly.

**Lean 4 source** [QLambda/Domain/Presheaf/SigmaMon.lean](#)

```
theorem singleton (? : CMap n m) :
  HasSum (fun _ : PUnit => ?) ? :=
  hasSum_single PUnit.unit
  (fun i hi => (hi (Subsingleton.elim i PUnit.unit)).elim)
```

#### 4.4.1286 Remove of zero for countable sums of CP maps

**Statement.** For a completely positive map  $\Phi$ : if for every  $i, i \notin s$ , then  $f \ i = 0$ , then the family  $\text{fun } i \text{ sums to } \Phi$  if and only if the family  $f$  sums to  $\Phi$ .

**Proof.** The key step rewrites with the hypothesis that if for every  $i, i \notin s$ , then  $f \ i = 0$  and standard identities for subtypes.

**Lean 4 source** [QLambda/Domain/Presheaf/SigmaMon.lean](#)

```

theorem remove_zero {α : Type} [Countable α]
  (f : α → CPMMap n m) (s : Set α) (α : CPMMap n m)
  (hzero : forall i, i notin s → f i = 0) :
  HasSum (fun i : s => f i) α <-> HasSum f α := by
change
  _root_.HasSum
    ((fun i => (f i).choi) comp (fun i : s => (i : ?))) α.choi <->
    _root_.HasSum (fun i => (f i).choi) α.choi
apply Subtype.val_injective.hasSum_iff
intro i hi
rw [hzero i (by simp using hi)]
rfl

```

#### 4.4.1287 Reindexing for countable sums of CP maps

**Statement.** For a completely positive map  $\Phi$ : the family  $f \circ e$  sums to  $\Phi$  if and only if the family  $f$  sums to  $\Phi$ .

**Proof.** The claim follows directly from the definitions of the objects involved.

**Lean 4 source** [QLambda/Domain/Presheaf/SigmaMon.lean](#)

```

theorem reindex {α β : Type} [Countable α] [Countable β]
  (e : β → α) (f : α → CPMMap n m) (α : CPMMap n m) :
  HasSum (f comp e) α <-> HasSum f α := by
change
  _root_.HasSum ((fun i => (f i).choi) comp e) α.choi <->
  _root_.HasSum (fun i => (f i).choi) α.choi
exact e.hasSum_iff

```

#### 4.4.1288 Group for countable sums of CP maps

**Statement.** For a completely positive map  $\Phi$ : if the family  $\text{fun } p \text{ sums to } \Phi$  and for every  $i$ , the family  $f_i$  sums to  $g_i$ , then the family  $g$  sums to  $\Phi$ .

**Proof.** The proof term combines the facts named in it directly.

**Lean 4 source** [QLambda/Domain/Presheaf/SigmaMon.lean](#)

```

theorem group {α : Type} [Countable α] {β : α → Type}
  [forall i, Countable (β i)] (f : (i : α) → β i → CPMMap n m)
  (g : α → CPMMap n m) (α : CPMMap n m)
  (hflat : HasSum (fun p : Sigma α, β p => f p.1 p.2) α)
  (hrows : forall i, HasSum (f i) (g i)) :
  HasSum g α :=
  _root_.HasSum.sigma hflat hrows

```

#### 4.4.1289 Flatten for countable sums of CP maps, assuming summability

**Statement.** For a completely positive map  $\Phi$ : if for every  $i$ , the family  $f_i$  sums to  $g_i$ ; the family  $g$  sums to  $\Phi$ ; and the family  $\text{fun } p$  is summable, then the family  $\text{fun } p$  sums to  $\Phi$ .

**Proof.** The proof term combines the facts named in it directly.

#### Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```
theorem flatten_of_summable {α : Type} [Countable α] {β : α → Type}
  [forall i, Countable (β i)] (f : (i : α) → β i → CPMMap n m)
  (g : α → CPMMap n m) (hg : HasSum g ?)
  (hrows : forall i, HasSum (f i) (g i)) (hg : HasSum g ?)
  (hflat : Summable (fun p : Sigma i, β i => (f p.1 p.2).choi)) :
  HasSum (fun p : Sigma i, β i => f p.1 p.2) ? :=
  _root_.HasSum.sigma_of_hasSum hg hrows hflat
```

#### 4.4.1290 Definition of the subfamily closed term

**Definition.** The subfamily closed term is a proposition-valued predicate, defined below.

**Construction.** Defined by an explicit formula built from the completely positive map and the summability.

#### Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```
def SubfamilyClosed : Prop :=
  forall {α : Type} [Countable α] {β : α → Type}
    [forall i, Countable (β i)] (f : (i : α) → β i → CPMMap n m)
    (g : α → CPMMap n m),
    HasSum (fun p : Sigma i, β i => f p.1 p.2) ? →
    forall i, exists ?, HasSum (f i) ?
```

#### 4.4.1291 Definition of the regrouping completeness

**Definition.** The regrouping completeness is a proposition-valued predicate, defined below.

**Construction.** Defined by an explicit formula built from the completely positive map and the summability.

#### Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```
def RegroupingComplete : Prop :=
  forall {α : Type} [Countable α] {β : α → Type}
    [forall i, Countable (β i)] (f : (i : α) → β i → CPMMap n m)
    (g : α → CPMMap n m),
    (forall i, HasSum (f i) (g i)) →
    Summable (fun i => (g i).choi) →
    Summable (fun p : Sigma i, β i => (f p.1 p.2).choi)
```

#### 4.4.1292 Subfamily closed term for countable sums of CP maps

**Statement.** `SubfamilyClosed (n := n) (m := m)`. Formally: `SubfamilyClosed (n := n) (m := m)`.

**Proof.** Each component of the claim is established separately. The goal is simplified using the definition of the `f` and standard identities for functions.

#### Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```

theorem subfamilyClosed : SubfamilyClosed (n := n) (m := m) := by
  classical
  intro ? _ ? _ f ? hflat i
  let F : (Sigma i, ? i) -> Matrix (Fin m x Fin n) (Fin m x Fin n) ? :=
    fun p => (f p.1 p.2).choi
  have hF : _root_.HasSum F ?.choi := hflat
  have hFs : Summable F := hF.summable
  have hinj : Function.Injective (fun j : ? i => Sigma.mk i j) := by
    intro a b h
    exact eq_of_heq (Sigma.mk.inj h).2
  have hrow : Summable (fun j : ? i => (f i j).choi) := by
    simpa [F, Function.comp_def] using hFs.comp_injective hinj
  let A := ?' j : ? i, (f i j).choi
  have hA : _root_.HasSum (fun j : ? i => (f i j).choi) A :=
    hrow.hasSum
  have hApos : A.PosSemidef :=
    ChoiSum.hasSum_posSemidef hA (fun j => (f i j).choi_pos)
  exact <<A, hApos>, hA>

```

#### 4.4.1293 Regrouping completeness for countable sums of CP maps

**Statement.** RegroupingComplete (n := n) (m := m). Formally: RegroupingComplete (n := n) (m := m).

**Proof.** By case analysis on hg. It follows from the summability of the trace of the real part, the definition of the congruence, standard identities for infinite sums and the fact that every entry of a positive semidefinite matrix is bounded by its trace.

#### Lean 4 source QLambda/Domain/Presheaf/SigmaMon.lean

```

theorem regroupingComplete :
  RegroupingComplete (n := n) (m := m) := by
  intro ? _ ? _ f g hrows hg
  let T : (p : Sigma i, ? i) -> ? :=
    fun p => (Matrix.trace (f p.1 p.2).choi).re
  have hTnonneg : forall p, 0 <= T p :=
    fun p => ChoiSum.trace_re_nonneg (f p.1 p.2).choi_pos
  have hrowTrace (i : ?) :
    _root_.HasSum (fun j => T <i, j>)
      (Matrix.trace (g i).choi).re :=
    ChoiSum.hasSum_trace_re (hrows i)
  have hgTrace :
    Summable (fun i => (Matrix.trace (g i).choi).re) := by
    rcases hg with <G, hG>
    exact (ChoiSum.hasSum_trace_re hG).summable
  have hT : Summable T := by
    apply (summable_sigma_of_nonneg hTnonneg).2
    refine <fun i => (hrowTrace i).summable, ?_>
    exact hgTrace.congr fun i => (hrowTrace i).tsum_eq.symm
  apply Pi.summable.mpr
  intro a
  apply Pi.summable.mpr
  intro b
  apply Summable.of_norm_bounded hT
  intro p

```

```
exact ChoiSum.entry_norm_le_trace_re
(f p.1 p.2).choi_pos a b
```

#### 4.4.1294 Definition of the partial countable sum of countable sums of CP maps

**Definition.** The partial countable sum is an element of `PartialCountableSum (CMap n m)`.

**Construction.** Constructed by supplying each component: summability, uniqueness, empty, singleton, remove zero, reindexing and flatten. The accompanying laws are verified from the definitions.

##### Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```
def partialCountableSum
  (hsub : SubfamilyClosed (n := n) (m := m))
  (hregroup : RegroupingComplete (n := n) (m := m)) :
  PartialCountableSum (CMap n m) where
  HasSum := HasSum
  unique := unique
  empty := empty
  singleton := singleton
  remove_zero := remove_zero
  reindex := reindex
  flatten := by
    intro ? _ ? _ f ?
    constructor
    * intro hflat
      choose g hg using fun i => hsub f ? hflat i
      exact <g, hg, group f g ? hflat hg>
    * rintro <g, hrows, hg>
      exact flatten_of_summable f g ? hrows hg
      (hregroup f g hrows hg.summable)
```

#### 4.4.1295 The premise-free partial countable sums of unrestricted intrinsic CP maps

**Definition.** The premise-free partial countable sums of unrestricted intrinsic CP maps, used as the ambient module for pseudo-representable coefficients.

**Construction.** Defined to be the partial countable sum of the subfamily closed term and the regrouping completeness.

##### Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```
noncomputable def cpMapPartialCountableSum :
  PartialCountableSum (CMap n m) :=
  CMapSum.partialCountableSum CMapSum.subfamilyClosed
  CMapSum.regroupingComplete
```

#### 4.4.1296 The premise-free partial countable-sum structure on finite-dimensional trace-nonincreasing superoperators

**Definition.** The premise-free partial countable-sum structure on finite-dimensional trace-nonincreasing superoperators.



**Construction.** Defined to be the partial countable sum of the subfamily closed term and the regrouping completeness.

**Lean 4 source** `QLambda/Domain/Presheaf/SigmaMon.lean`

```
noncomputable def superoperatorPartialCountableSum :
  PartialCountableSum (Superoperator n m) :=
  ChoiSum.partialCountableSum ChoiSum.subfamilyClosed
  ChoiSum.regroupingComplete
```

#### 4.4.1297 The tensor product of two jointly TNI countable branch families is again a jointly TNI countable family

**Statement.** The tensor product of two jointly TNI countable branch families is again a jointly TNI countable family. The result includes entangled ancillary inputs because `Superoperator.tensor` is intrinsically TNI and the proof uses the full Choi sums, not pointwise state factorization. Formally:  $\text{HasSum } (\text{fun } p : \Sigma \_ : \iota, \kappa \Rightarrow \text{Superoperator.tensor } (f \text{ p.1}) (g \text{ p.2})) (\text{Superoperator.tensor } \Phi \Psi).$

**Proof.** The claim follows directly from the definitions of the objects involved.

**Lean 4 source** `QLambda/Domain/Presheaf/SigmaMon.lean`

```
theorem tensor_hasSum {α β : Type} [Countable α] [Countable β]
  {f : α → Superoperator n m} {g : β → Superoperator n m}
  {h : α → Superoperator n m} {k : β → Superoperator n m}
  (hf : HasSum f) (hg : HasSum g) :
  HasSum
    (fun p : Sigma α β : α, β => Superoperator.tensor (f p.1) (g p.2))
    (Superoperator.tensor h k) := by
  exact
    (superoperatorPartialCountableSum.flatten
      (fun i j => Superoperator.tensor (f i) (g j))
      (Superoperator.tensor h k)).mpr
    <fun i => Superoperator.tensor (f i) h,
      fun i => tensor_hasSum_right (f i) hg,
      tensor_hasSum_left hf ?>
```

#### 4.4.1298 Every finite mixed tensor partition has exactly the ordinary CP sum as its jointly TNI aggregate

**Statement.** Every finite mixed tensor partition has exactly the ordinary CP sum as its jointly TNI aggregate. Formally:  $\exists X : \text{Superoperator } (n * \ell) (m * r), X.\text{cp} = \sum p \in s, (\text{Superoperator.tensor } (f \text{ p.1}) (g \text{ p.2})).\text{cp}.$

**Proof.** This is an instance of the fact that the intrinsic CP map of a finite approximant is the ordinary finite sum of the selected branch CP maps.

**Lean 4 source** `QLambda/Domain/Presheaf/SigmaMon.lean`

```
theorem tensor_finite_subfamily_cp_sum
  {α β : Type} [Countable α] [Countable β]
  {f : α → Superoperator n m} {g : β → Superoperator n m}
```

```

{g : ? -> Superoperator ? r} {? : Superoperator ? r}
(hf : HasSum f ?) (hg : HasSum g ?)
(s : Finset (Sigma _ : ?, ?)) :
exists ? : Superoperator (n * ?) (m * r),
  ?.cp =
    ? p in s,
      (Superoperator.tensor (f p.1) (g p.2)).cp :=
finite_subfamily_cp_sum (tensor_hasSum hf hg) s

```

#### 4.4.1299 Binary Choi sum when the CP aggregate remains TNI

**Statement.** Binary Choi sum when the CP aggregate remains TNI. Formally:  $\text{HasSum } \text{fun } i \langle a.\text{cp} + b.\text{cp}, h \rangle$ .

**Proof.** The goal is simplified using the Choi matrix of a sum for completely positive maps.

##### Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```

theorem hasSum_add_of_addable (a b : Superoperator n m)
  (h : TraceNonincreasing (a.cp + b.cp)) :
  HasSum (fun i : Bool => bif i then a else b)
    <a.cp + b.cp, h> := by
  change _root_.HasSum
    (fun i : Bool => (bif i then a else b).cp.choi)
    (a.cp + b.cp).choi
  have hfin :=
    hasSum_fintype (fun i : Bool => (bif i then a else b).cp.choi)
  have htot :
    (? i : Bool, (bif i then a else b).cp.choi) = (a.cp + b.cp).choi := by
    simp [CPMap.choi_add]
  exact htot |> hfin

```

#### 4.4.1300 Unrestricted CP maps always admit Bool-split sums

**Statement.** Unrestricted CP maps always admit Bool-split sums. Formally:  $\text{HasSum } \text{fun } i (a + b)$ .

**Proof.** The goal is simplified using the Choi matrix of a sum for completely positive maps.

##### Lean 4 source `QLambda/Domain/Presheaf/SigmaMon.lean`

```

theorem hasSum_add {n m : Nat} (a b : CPMap n m) :
  HasSum (fun i : Bool => bif i then a else b) (a + b) := by
  change _root_.HasSum
    (fun i : Bool => (bif i then a else b).choi) (a + b).choi
  have hfin := hasSum_fintype (fun i : Bool => (bif i then a else b).choi)
  have htot :
    (? i : Bool, (bif i then a else b).choi) = (a + b).choi := by
    simp [CPMap.choi_add]
  exact htot |> hfin

```

#### 4.4.1301 Two TNI maps are addable exactly when their CP sum remains TNI

**Definition.** Two TNI maps are addable exactly when their CP sum remains TNI.

**Construction.** Defined to be the trace non-increase of the sum of the underlying completely positive map of  $\Phi$  and the underlying completely positive map of  $\Psi$ .

**Lean 4 source** [QLambda/Domain/Presheaf/Summation.lean](#)

```
def Addable (? ? : Superoperator n m) : Prop :=
  TraceNonincreasing (? .cp + ? .cp)
```

#### 4.4.1302 A defined binary sum

**Definition.** A defined binary sum.

**Construction.** Constructed by supplying each component: underlying completely positive map and trace nonincreasing. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/Presheaf/Summation.lean](#)

```
def add (? ? : Superoperator n m) (h : Addable ? ?) :
  Superoperator n m where
  cp := ? .cp + ? .cp
  trace_nonincreasing := h
```

#### 4.4.1303 Underlying completely positive map of a sum

**Statement.** For superoperators  $\Phi, \Psi$ : if  $\text{Addable } \Phi \ \Psi$ , then  $(\text{add } \Phi \ \Psi \ h) . \text{cp}$  equals the sum of the underlying completely positive map of  $\Phi$  and the underlying completely positive map of  $\Psi$ .

**Proof.** By definition: the left-hand side,  $(\text{add } \Phi \ \Psi \ h) . \text{cp}$ , and the right-hand side, the sum of the underlying completely positive map of  $\Phi$  and the underlying completely positive map of  $\Psi$ , unfold to the same term.

**Lean 4 source** [QLambda/Domain/Presheaf/Summation.lean](#)

```
theorem cp_add (? ? : Superoperator n m) (h : Addable ? ?) :
  (add ? ? h).cp = ? .cp + ? .cp :=
  rfl
```

#### 4.4.1304 Addition for finitely supported sums is commutative

**Statement.** For superoperators  $\Phi, \Psi$ : if  $\text{Addable } \Phi \ \Psi$  and  $\text{Addable } \Psi \ \Phi$ , then the addition of  $\Phi, \Psi$ ,  $h\Phi\Psi$  equals the addition of  $\Psi, \Phi$ ,  $h\Psi\Phi$ .

**Proof.** Both sides are compared pointwise (by extensionality). It follows from the extensionality for superoperators.

**Lean 4 source** [QLambda/Domain/Presheaf/Summation.lean](#)

```
theorem add_comm (? ? : Superoperator n m)
  (h?? : Addable ? ?) (h?? : Addable ? ?) :
  add ? ? h?? = add ? ? h?? := by
  apply Superoperator.ext
  exact _root_.add_comm ? .cp ? .cp
```

#### 4.4.1305 Zero of the addable for finitely supported sums

**Statement.** For a superoperator  $\Phi$ :  $\text{Addable } 0 \ \Phi$ . Formally:  $\text{Addable } 0 \ \Phi$ .

**Proof.** The goal is simplified using the definition of the addable.

**Lean 4 source** [QLambda/Domain/Presheaf/Summation.lean](#)

```
theorem zero_addable (? : Superoperator n m) :  
  Addable 0 ? := by  
  simpa [Addable] using ?.trace_nonincreasing
```

#### 4.4.1306 Addition of the zeroable for finitely supported sums

**Statement.** For a superoperator  $\Phi$ :  $\text{Addable } \Phi \ 0$ . Formally:  $\text{Addable } \Phi \ 0$ .

**Proof.** The goal is simplified using the definition of the addable.

**Lean 4 source** [QLambda/Domain/Presheaf/Summation.lean](#)

```
theorem add_zeroable (? : Superoperator n m) :  
  Addable ? 0 := by  
  simpa [Addable] using ?.trace_nonincreasing
```

#### 4.4.1307 Zero is a right unit for addition for finitely supported sums

**Statement.** For a superoperator  $\Phi$ : the addition of  $\Phi$  and the addition zeroable of  $\Phi$  at 0 equals  $\Phi$ .

**Proof.** Both sides are compared pointwise (by extensionality). The goal is simplified using the extensionality for superoperators.

**Lean 4 source** [QLambda/Domain/Presheaf/Summation.lean](#)

```
theorem add_zero (? : Superoperator n m) :  
  add ? 0 (add_zeroable ?) = ? := by  
  apply Superoperator.ext  
  simp
```

#### 4.4.1308 Zero is a left unit for addition for finitely supported sums

**Statement.** For a superoperator  $\Phi$ : the addition of  $\Phi$  and the zero addable of  $\Phi$  at 0 equals  $\Phi$ .

**Proof.** Both sides are compared pointwise (by extensionality). The goal is simplified using the extensionality for superoperators.

**Lean 4 source** [QLambda/Domain/Presheaf/Summation.lean](#)

```
theorem zero_add (? : Superoperator n m) :  
  add 0 ? (zero_addable ?) = ? := by  
  apply Superoperator.ext  
  simp
```

#### 4.4.1309 Addition for finitely supported sums is associative

**Statement.** For superoperators  $\Phi, \Psi, X$ : if `Addable  $\Phi \Psi$` ; `Addable (add  $\Phi \Psi$  h $\Phi\Psi$ ) X`; `Addable  $\Psi X$` ; and `Addable  $\Phi$  (add  $\Psi X$  h $\Psi X$ )`, then the addition of the addition of  $\Phi, \Psi, h\Phi\Psi, X$ , the  $h$  left equals the addition of  $\Phi$ , the addition of  $\Psi, X, h\Psi X$ , the  $h$  right.

**Proof.** Both sides are compared pointwise (by extensionality). It follows from the extensionality for superoperators.

**Lean 4 source** `QLambda/Domain/Presheaf/Summation.lean`

```
theorem add_assoc (??? : Superoperator n m)
  (h?? : Addable ??)
  (hLeft : Addable (add ?? h??) ?)
  (h?? : Addable ??)
  (hRight : Addable ? (add ?? h??)) :
  add (add ?? h??) ? hLeft =
    add ? (add ?? h??) hRight := by
  apply Superoperator.ext
  exact _root_.add_assoc ?.cp ?.cp ?.cp
```

#### 4.4.1310 The CP sum below a natural-number cutoff

**Definition.** The CP sum below a natural-number cutoff.

**Construction.** Defined to be  $\sum i \in \text{Finset.range } N, (f\ i).cp$ .

**Lean 4 source** `QLambda/Domain/Presheaf/Summation.lean`

```
def cpSum (f : Nat -> Superoperator n m) (N : Nat) : CMap n m :=
  ? i in Finset.range N, (f i).cp
```

#### 4.4.1311 $N$ supports $f$ when every term at or above $N$ is zero

**Definition.**  $N$  supports  $f$  when every term at or above  $N$  is zero.

**Construction.** Defined to be  $\forall i, N \leq i \rightarrow f\ i = 0$ .

**Lean 4 source** `QLambda/Domain/Presheaf/Summation.lean`

```
def SupportedAt (f : Nat -> Superoperator n m) (N : Nat) : Prop :=
  forall i, N <= i -> f i = 0
```

#### 4.4.1312 Evidence that a countable family has a defined, finite-support TNI sum

**Definition.** Evidence that a countable family has a defined, finite-support TNI sum.

**Construction.** An element consists of `cutoff`, `supported` and `trace_nonincreasing`.

**Lean 4 source** `QLambda/Domain/Presheaf/Summation.lean`

```
structure Summation (f : Nat -> Superoperator n m) where
  cutoff : Nat
  supported : SupportedAt f cutoff
  trace_nonincreasing : TraceNonincreasing (cpSum f cutoff)
```

#### 4.4.1313 The superoperator denoted by a supported summation witness

**Definition.** The superoperator denoted by a supported summation witness.

**Construction.** Constructed by supplying each component: underlying completely positive map and trace nonincreasing. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/Presheaf/Summation.lean](#)

```
def sum {f : Nat -> Superoperator n m} (h : Summation f) :  
  Superoperator n m where  
  cp := cpSum f h.cutoff  
  trace_nonincreasing := h.trace_nonincreasing
```

#### 4.4.1314 Underlying completely positive map of a finite sum

**Statement.** If  $\text{Summation } f$ , then  $(\text{sum } h).cp$  equals the CP sum of  $f$  and the cutoff of  $h$ .

**Proof.** By definition: the left-hand side,  $(\text{sum } h).cp$ , and the right-hand side, the CP sum of  $f$  and the cutoff of  $h$ , unfold to the same term.

**Lean 4 source** [QLambda/Domain/Presheaf/Summation.lean](#)

```
theorem cp_sum {f : Nat -> Superoperator n m} (h : Summation f) :  
  (sum h).cp = cpSum f h.cutoff :=  
  rfl
```

#### 4.4.1315 The CP sum respects supported

**Statement.** For natural numbers  $N, M$ : if  $\text{SupportedAt } f \ N$  and  $\text{SupportedAt } f \ M$ , then the CP sum of  $f$  and  $N$  equals the CP sum of  $f$  and  $M$ .

**Proof.** The key step rewrites with the definition of the CP sum, standard identities for finite sums and the hypothesis that  $\text{SupportedAt } f \ N$ .

**Lean 4 source** [QLambda/Domain/Presheaf/Summation.lean](#)

```
private theorem cpSum_eq_of_supported {f : Nat -> Superoperator n m}  
  {N M : Nat} (hN : SupportedAt f N) (hM : SupportedAt f M) :  
  cpSum f N = cpSum f M := by  
  wlog hNM : N <= M generalizing N M  
  * exact (this hM hN (le_of_not_ge hNM)).symm  
  rw [cpSum, cpSum, <- Finset.sum_range_add_sum_Ico _ hNM]  
  suffices (? i in Finset.Ico N M, (f i).cp) = 0 by  
    rw [this]  
    exact (_root_.add_zero _).symm  
  apply Finset.sum_eq_zero  
  intro i hi  
  rw [hN i (Finset.mem_Ico.mp hi).1]  
  rfl
```

#### 4.4.1316 Different valid support bounds produce the same sum

**Statement.** Different valid support bounds produce the same sum. Formally:  $\text{sum } h = \text{sum } k$ .

**Proof.** Both sides are compared pointwise (by extensionality). It follows from the extensionality for superoperators and the fact that the CP sum respects supported.

**Lean 4 source** `QLambda/Domain/Presheaf/Summation.lean`

```
theorem sum_eq {f : Nat -> Superoperator n m} (h k : Summation f) :
  sum h = sum k := by
  apply Superoperator.ext
  exact cpSum_eq_of_supported h.supported k.supported
```

#### 4.4.1317 Pointwise-equal families transport summability evidence

**Definition.** Pointwise-equal families transport summability evidence.

**Construction.** Constructed by supplying each component: cutoff, supported and trace nonincreasing. The accompanying laws are verified from the definitions.

**Lean 4 source** `QLambda/Domain/Presheaf/Summation.lean`

```
def congr {f g : Nat -> Superoperator n m} (h : Summation f)
  (hfg : forall i, f i = g i) : Summation g where
  cutoff := h.cutoff
  supported := by
    intro i hi
    rw [← hfg i]
    exact h.supported i hi
  trace_nonincreasing := by
    have hcp : cpSum g h.cutoff = cpSum f h.cutoff := by
      apply Finset.sum_congr rfl
    intro i _
    rw [← hfg i]
    rw [hcp]
    exact h.trace_nonincreasing
```

#### 4.4.1318 Sum of a congruence

**Statement.** If  $\text{Summation } f$  and for every  $i, f i = g i$ , then the sum of the congruence of  $h$  and  $hfg$  equals the sum of  $h$ .

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the hypothesis that for every  $i, f i = g i$ , the definition of the CP sum and the extensionality for superoperators.

**Lean 4 source** `QLambda/Domain/Presheaf/Summation.lean`

```
theorem sum_congr {f g : Nat -> Superoperator n m} (h : Summation f)
  (hfg : forall i, f i = g i) :
  sum (congr h hfg) = sum h := by
  apply Superoperator.ext
  change cpSum g h.cutoff = cpSum f h.cutoff
  unfold cpSum
  apply Finset.sum_congr rfl
```

```
intro i _
rw [ <- hfg i]
```

#### 4.4.1319 The everywhere-zero family is summable

**Definition.** The everywhere-zero family is summable.

**Construction.** Constructed by supplying each component: cutoff, supported and trace nonincreasing. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/Presheaf/Summation.lean](#)

```
def zeroSummation : Summation (fun _ : Nat => (0 : Superoperator n m)) where
  cutoff := 0
  supported := by simp [SupportedAt]
  trace_nonincreasing := by
    simp [cpSum] using (0 : Superoperator n m).trace_nonincreasing
```

#### 4.4.1320 Sum of zero

**Statement.** The sum of the zero summation equals 0. Formally:  $\text{sum zeroSummation} = 0$ .

**Proof.** Both sides are compared pointwise (by extensionality). It follows from the extensionality for superoperators.

**Lean 4 source** [QLambda/Domain/Presheaf/Summation.lean](#)

```
theorem sum_zero : sum (zeroSummation : Summation
  (fun _ : Nat => (0 : Superoperator n m))) = 0 := by
  apply Superoperator.ext
  rfl
```

#### 4.4.1321 A countable family with one nonzero term

**Definition.** A countable family with one nonzero term.

**Construction.** The map sending  $i$  to  $\text{if } i = k \text{ then } \Phi \text{ else } 0$ .

**Lean 4 source** [QLambda/Domain/Presheaf/Summation.lean](#)

```
def single (k : Nat) (? : Superoperator n m) : Nat -> Superoperator n m :=
  fun i => if i = k then ? else 0
```

#### 4.4.1322 CP sum of a single-entry element

**Statement.** For a natural number  $k$ , a superoperator  $\Phi$ : the CP sum of the single-entry element of  $k$  and  $\Phi$  and the sum of  $k$  and 1 equals the underlying completely positive map of  $\Phi$ .

**Proof.** The key step rewrites with standard identities for finite sums, the definition of the single-entry element and the definition of the CP sum.

**Lean 4 source** [QLambda/Domain/Presheaf/Summation.lean](#)



```

theorem cpSum_single (k : Nat) (? : Superoperator n m) :
  cpSum (single k ?) (k + 1) = ?.cp := by
  classical
  unfold cpSum
  rw [Finset.sum_eq_single k]
  * simp [single]
  * intro i hi hik
    simp [single, hik]
  * simp

```

#### 4.4.1323 Every singleton family has a defined sum

**Definition.** Every singleton family has a defined sum.

**Construction.** Constructed by supplying each component: cutoff, supported and trace nonincreasing. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/Presheaf/Summation.lean](#)

```

def singleSummation (k : Nat) (? : Superoperator n m) :
  Summation (single k ?) where
  cutoff := k + 1
  supported := by
    intro i hi
    simp only [single]
    split
    * rename_i hik
      subst i
      omega
    * rfl
  trace_nonincreasing := by
    rw [cpSum_single]
    exact ?.trace_nonincreasing

```

#### 4.4.1324 Sum of a single-entry element

**Statement.** For a natural number  $k$ , a superoperator  $\Phi$ : the sum of the single-entry element summation of  $k$  and  $\Phi$  equals  $\Phi$ .

**Proof.** Both sides are compared pointwise (by extensionality). It follows from the extensionality for superoperators and the CP sum of a single-entry element.

**Lean 4 source** [QLambda/Domain/Presheaf/Summation.lean](#)

```

theorem sum_single (k : Nat) (? : Superoperator n m) :
  sum (singleSummation k ?) = ? := by
  apply Superoperator.ext
  exact cpSum_single k ?

```

#### 4.4.1325 Extend a finite family by zero to a countable family

**Definition.** Extend a finite family by zero to a countable family.

**Construction.** The map sending  $i$  to  $\text{if } h : i < N \text{ then } f \langle i, h \rangle \text{ else } 0$ .

**Lean 4 source** `QLambda/Domain/Presheaf/Summation.lean`

```
def extendFin (N : Nat) (f : Fin N -> Superoperator n m) :
  Nat -> Superoperator n m :=
  fun i => if h : i < N then f <i, h> else 0
```

#### 4.4.1326 The extend finite index is supported

**Statement.** For a natural number  $N$ , an index  $f$ : `SupportedAt (extendFin N f) N`.

**Proof.** The goal is simplified using the definition of the extend finite index and standard identities for natural numbers.

**Lean 4 source** `QLambda/Domain/Presheaf/Summation.lean`

```
theorem extendFin_supported (N : Nat) (f : Fin N -> Superoperator n m) :
  SupportedAt (extendFin N f) N := by
  intro i hi
  simp [extendFin, Nat.not_lt.mpr hi]
```

#### 4.4.1327 A finite family has a defined $\sigma$ -sum whenever its aggregate CP map is trace-nonincreasing

**Definition.** A finite family has a defined  $\sigma$ -sum whenever its aggregate CP map is trace-nonincreasing.

**Construction.** Constructed by supplying each component: cutoff, supported and trace nonincreasing. The accompanying laws are verified from the definitions.

**Lean 4 source** `QLambda/Domain/Presheaf/Summation.lean`

```
def finiteSummation (N : Nat) (f : Fin N -> Superoperator n m)
  (h : TraceNonincreasing (cpSum (extendFin N f) N)) :
  Summation (extendFin N f) where
  cutoff := N
  supported := extendFin_supported N f
  trace_nonincreasing := h
```

#### 4.4.1328 A chain of finite prefixes that becomes stationary at $N$ has the same value at every later supported cutoff

**Statement.** A chain of finite prefixes that becomes stationary at  $N$  has the same value at every later supported cutoff. Formally:  $\text{cpSum } f \ M = \text{cpSum } f \ N$ .

**Proof.** It follows from the fact that the CP sum respects supported and the hypothesis that `SupportedAt f N`.

**Lean 4 source** `QLambda/Domain/Presheaf/Summation.lean`

```
theorem stationary_cutoff {f : Nat -> Superoperator n m} {N M : Nat}
  (hN : SupportedAt f N) (hNM : N <= M) :
  cpSum f M = cpSum f N := by
  apply cpSum_eq_of_supported
```

```

* exact fun i hi => hN i (hNM.trans hi)
* exact hN

```

#### 4.4.1329 Trace non-increase for an intrinsic CP map

**Definition.** Trace non-increase for an intrinsic CP map.

**Construction.** Defined by an explicit formula built from the trace.

**Lean 4 source** [QLambda/Domain/Presheaf/Superoperator.lean](#)

```

def TraceNonincreasing {n m : Nat} (? : CMap n m) : Prop :=
  forall ? : Matrix (Fin n) (Fin n) ?, ?.PosSemidef ->
    (Matrix.trace (? .applyMat ?)).re <= (Matrix.trace ?).re

```

#### 4.4.1330 Intrinsic trace non-increase is exactly the input-effect bound

**Statement.** Intrinsic trace non-increase is exactly the input-effect bound. Notice that this bounds the output partial trace of the Choi matrix, not the whole Choi matrix itself. Formally:  $\text{TraceNonincreasing } \Phi \leftrightarrow \Phi.\text{effect} \leq 1$ .

**Proof.** The witness is assembled directly from its components, using the fact that intrinsic finite-dimensional TNI is equivalent to the Choi partial trace being below identity.

**Lean 4 source** [QLambda/Domain/Presheaf/Superoperator.lean](#)

```

theorem traceNonincreasing_iff_effect_le_one {n m : Nat} (? : CMap n m) :
  TraceNonincreasing ? <-> ? .effect <= 1 :=
  <CMap.effect_le_one_of_trace_nonincreasing ?,
  CMap.trace_nonincreasing_of_effect_le_one ?>

```

#### 4.4.1331 A finite-dimensional trace-nonincreasing completely positive map

**Definition.** A finite-dimensional trace-nonincreasing completely positive map.

**Construction.** An element consists of `cp` and `trace_nonincreasing`.

**Lean 4 source** [QLambda/Domain/Presheaf/Superoperator.lean](#)

```

structure Superoperator (n m : Nat) where
  cp : CMap n m
  trace_nonincreasing : TraceNonincreasing cp

```

#### 4.4.1332 Extensionality for superoperators

**Statement.** For superoperators  $\Phi, \Psi$ : if  $\Phi.\text{cp} = \Psi.\text{cp}$ , then  $\Phi = \Psi$ .

**Proof.** By case analysis on the superoperator  $\Phi$ .

**Lean 4 source** [QLambda/Domain/Presheaf/Superoperator.lean](#)

```

theorem ext {? ? : Superoperator n m} (h : ?.cp = ?.cp) : ? = ? := by
  cases ?
  cases ?
  cases h
  rfl

```

#### 4.4.1333 Build an intrinsic superoperator from a Kraus family and a proof about its operator-sum action

**Definition.** Build an intrinsic superoperator from a Kraus family and a proof about its operator-sum action.

**Construction.** Constructed by supplying each component: underlying completely positive map and trace nonincreasing. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/Presheaf/Superoperator.lean](#)

```

def ofKraus (K : KrausFamily n m)
  (hK : forall ? : Matrix (Fin n) (Fin n) ?, ?.PosSemidef ->
    (Matrix.trace (KrausFamily.applyMat K ?)).re <=
      (Matrix.trace ?).re) :
  Superoperator n m where
  cp := CPMMap.ofKraus K
  trace_nonincreasing := by
    intro ? h?
    simpa using hK ? h?

```

#### 4.4.1334 Forget a finite Kraus presentation while preserving its TNI proof

**Definition.** Forget a finite Kraus presentation while preserving its TNI proof.

**Construction.** Defined to be the CP map with Kraus family the trace nonincreasing of  $\Phi$ .

**Lean 4 source** [QLambda/Domain/Presheaf/Superoperator.lean](#)

```

def ofQuantumOperation (? : QuantumOperation n m) : Superoperator n m :=
  ofKraus ?.kraus ?.trace_nonincreasing

```

#### 4.4.1335 Underlying completely positive map of the superoperator of a quantum operation

**Statement.**  $(\text{ofQuantumOperation } \Phi).cp$  equals the CP map with Kraus family the Kraus operators of  $\Phi$ .

**Proof.** By definition: the left-hand side,  $(\text{ofQuantumOperation } \Phi).cp$ , and the right-hand side, the CP map with Kraus family the Kraus operators of  $\Phi$ , unfold to the same term.

**Lean 4 source** [QLambda/Domain/Presheaf/Superoperator.lean](#)

```

theorem cp_ofQuantumOperation (? : QuantumOperation n m) :
  (ofQuantumOperation ?).cp = CPMMap.ofKraus ?.kraus :=
  rfl

```

#### 4.4.1336 Recover an arbitrary finite Kraus presentation

**Definition.** Recover an arbitrary finite Kraus presentation.

**Construction.** Constructed by supplying each component: Kraus operators and trace nonincreasing. The accompanying laws are verified from the definitions.

**Lean 4 source** `QLambda/Domain/Presheaf/Superoperator.lean`

```
noncomputable def toQuantumOperation (? : Superoperator n m) :  
  QuantumOperation n m where  
  kraus := ?.cp.toKraus  
  trace_nonincreasing := ?.trace_nonincreasing
```

#### 4.4.1337 Superoperator of a quantum operation of a passage to quantum operation

**Statement.** For a superoperator  $\Phi$ : the superoperator of a quantum operation of the passage to quantum operation of  $\Phi$  equals  $\Phi$ .

**Proof.** Both sides are compared pointwise (by extensionality). It follows from the extensionality for superoperators and the map determined by a Kraus family of the Kraus presentation.

**Lean 4 source** `QLambda/Domain/Presheaf/Superoperator.lean`

```
theorem ofQuantumOperation_toQuantumOperation (? : Superoperator n m) :  
  ofQuantumOperation (toQuantumOperation ?) = ? := by  
  apply ext  
  exact CMap.ofKraus_toKraus ?.cp
```

#### 4.4.1338 Underlying completely positive map of the passage to quantum operation for superoperators

**Statement.** For a superoperator  $\Phi$ : the CP map with Kraus family  $(\text{toQuantumOperation } \Phi). \text{kraus}$  equals the underlying completely positive map of  $\Phi$ .

**Proof.** This is an instance of the map determined by a Kraus family of the Kraus presentation.

**Lean 4 source** `QLambda/Domain/Presheaf/Superoperator.lean`

```
theorem cp_toQuantumOperation (? : Superoperator n m) :  
  CMap.ofKraus (toQuantumOperation ?).kraus = ?.cp :=  
  CMap.ofKraus_toKraus ?.cp
```

#### 4.4.1339 Identity superoperator

**Definition.** Identity superoperator.

**Construction.** Constructed by supplying each component: underlying completely positive map and trace nonincreasing. The accompanying laws are verified from the definitions.

**Lean 4 source** `QLambda/Domain/Presheaf/Superoperator.lean`

```

def identity (n : Nat) : Superoperator n n where
  cp := CPMat.identity n
  trace_nonincreasing := by
    intro ? _
    rw [CPMap.applyMat_identity]

```

#### 4.4.1340 Zero superoperator

**Definition.** Zero superoperator.

**Construction.** Constructed by supplying each component: underlying completely positive map and trace nonincreasing. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/Presheaf/Superoperator.lean](#)

```

def zero : Superoperator n m where
  cp := 0
  trace_nonincreasing := by
    intro ? h?
    have htr : 0 <= Matrix.trace ? := PosSemidef.trace_nonneg h?
    rw [CPMap.applyMat_zero, Matrix.trace_zero, Complex.zero_re]
    exact (RCLike.nonneg_iff (K := ?).mp htr).1

```

#### 4.4.1341 Underlying completely positive map of zero for superoperators

**Statement.** The underlying completely positive map of 0 equals 0. Formally:  $0.cp = 0$ .

**Proof.** By definition: the left-hand side, the underlying completely positive map of 0, and the right-hand side, 0, unfold to the same term.

**Lean 4 source** [QLambda/Domain/Presheaf/SuperoperatorInstances.lean](#)

```

theorem cp_zero : (0 : Superoperator n m).cp = 0 :=
  rfl

```

#### 4.4.1342 Action on a matrix of zero for superoperators

**Statement.** For a matrix  $\rho$ :  $0.cp.applyMat \rho = 0$ . Formally:  $0.cp.applyMat \rho = 0$ .

**Proof.** This is an instance of the action on a matrix of zero for completely positive maps.

**Lean 4 source** [QLambda/Domain/Presheaf/SuperoperatorInstances.lean](#)

```

theorem applyMat_zero (? : Matrix (Fin n) (Fin n) ?) :
  (0 : Superoperator n m).cp.applyMat ? = 0 :=
  CPMat.applyMat_zero ?

```

#### 4.4.1343 Every CP map below a TNI map in Choi order is itself TNI

**Definition.** Every CP map below a TNI map in Choi order is itself TNI.

**Construction.** Constructed by supplying each component: underlying completely positive map and trace nonincreasing. The accompanying laws are verified from the definitions.

#### Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```

noncomputable def ofLE (? : CMap n m) (? : Superoperator n m)
  (h : ? <= ?.cp) : Superoperator n m where
  cp := ?
  trace_nonincreasing := by
    intro ? h?
    let R : CMap n m := CMap.residualOfLE h
    have hsum : ? + R = ?.cp := CMap.add_residualOfLE h
    have hRtrace :
      0 <= (Matrix.trace (R.applyMat ?)).re := by
        have hpos := CMap.applyMat_posSemidef R h?
        exact
          (RCLike.nonneg_iff (K := ?).mp
            (Matrix.PosSemidef.trace_nonneg hpos)).1
    have htnti := ?.trace_nonincreasing ? h?
    rw [← hsum, CMap.applyMat_add_map, Matrix.trace_add,
      Complex.add_re] at htnti
    linarith

```

#### 4.4.1344 Underlying completely positive map of the map dominated by a given bound for superoperators

**Statement.** For a completely positive map  $\Phi$ , a superoperator  $\Psi$ : if  $\Phi \leq \Psi.cp$ , then  $(\text{ofLE } \Phi \Psi h).cp = \Phi$ .

**Proof.** By definition: the left-hand side,  $(\text{ofLE } \Phi \Psi h).cp$ , and the right-hand side,  $\Phi$ , unfold to the same term.

#### Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```

theorem cp_ofLE (? : CMap n m) (? : Superoperator n m)
  (h : ? <= ?.cp) :
  (ofLE ? ? h).cp = ? :=
  rfl

```

#### 4.4.1345 Sequential composition, first $\Phi$ and then $\Psi$

**Definition.** Sequential composition, first  $\Phi$  and then  $\Psi$ .

**Construction.** Constructed by supplying each component: underlying completely positive map and trace nonincreasing. The accompanying laws are verified from the definitions.

#### Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```

noncomputable def comp (? : Superoperator m ?) (? : Superoperator n m) :
  Superoperator n ? where
  cp := CMap.comp ?.cp ?.cp
  trace_nonincreasing := by
    intro ? h?
    rw [CMap.applyMat_comp]
    exact
      (?.trace_nonincreasing _ (CMap.applyMat_posSemidef ?.cp h?)).trans
        (?.trace_nonincreasing ? h?)

```

#### 4.4.1346 Underlying completely positive map of a composite for superoperators

**Statement.** For superoperators  $\Psi, \Phi$ :  $(\text{comp } \Psi \ \Phi) . \text{cp}$  equals the composite of the underlying completely positive map of  $\Psi$  after the underlying completely positive map of  $\Phi$ .

**Proof.** By definition: the left-hand side,  $(\text{comp } \Psi \ \Phi) . \text{cp}$ , and the right-hand side, the composite of the underlying completely positive map of  $\Psi$  after the underlying completely positive map of  $\Phi$ , unfold to the same term.

**Lean 4 source** [QLambda/Domain/Presheaf/SuperoperatorInstances.lean](#)

```
theorem cp_comp (? : Superoperator m ?) (? : Superoperator n m) :  
  (comp ? ?).cp = CMap.comp ? .cp ? .cp :=  
  rfl
```

#### 4.4.1347 Identity of a composite for superoperators

**Statement.** For a superoperator  $\Phi$ : the composite of the identity on dimension  $m$  after  $\Phi$  equals  $\Phi$ .

**Proof.** This is an instance of the extensionality for bilinear maps.

**Lean 4 source** [QLambda/Domain/Presheaf/SuperoperatorInstances.lean](#)

```
theorem identity_comp (? : Superoperator n m) :  
  comp (identity m) ? = ? :=  
  ext (CMap.identity_comp ? .cp)
```

#### 4.4.1348 Composition of the identity for superoperators

**Statement.** For a superoperator  $\Phi$ : the composite of  $\Phi$  after the identity on dimension  $n$  equals  $\Phi$ .

**Proof.** This is an instance of the extensionality for bilinear maps.

**Lean 4 source** [QLambda/Domain/Presheaf/SuperoperatorInstances.lean](#)

```
theorem comp_identity (? : Superoperator n m) :  
  comp ? (identity n) = ? :=  
  ext (CMap.comp_identity ? .cp)
```

#### 4.4.1349 Composition for superoperators is associative

**Statement.** For superoperators  $X, \Psi, \Phi$ : the composite of  $X$  after the composite of  $\Psi$  after  $\Phi$  equals the composite of the composite of  $X$  after  $\Psi$  after  $\Phi$ .

**Proof.** This is an instance of the extensionality for bilinear maps.

**Lean 4 source** [QLambda/Domain/Presheaf/SuperoperatorInstances.lean](#)

```
theorem comp_assoc (? : Superoperator ? r) (? : Superoperator m ?)  
  (? : Superoperator n m) :  
  comp ? (comp ? ?) = comp (comp ? ?) ? :=  
  ext (CMap.comp_assoc ? .cp ? .cp ? .cp)
```



#### 4.4.1350 Composition of zero for superoperators, in the left argument

**Statement.** For a superoperator  $\Phi$ : the composite of 0 after  $\Phi$  equals 0.

**Proof.** This is an instance of the extensionality for bilinear maps.

**Lean 4 source** [QLambda/Domain/Presheaf/SuperoperatorInstances.lean](#)

```
theorem comp_zero_left (? : Superoperator n m) :  
  comp (0 : Superoperator m ?) ? = 0 :=  
  ext (CMap.comp_zero_left ?.cp)
```

#### 4.4.1351 Composition of zero for superoperators, in the right argument

**Statement.** For a superoperator  $\Psi$ : the composite of  $\Psi$  after 0 equals 0.

**Proof.** This is an instance of the extensionality for bilinear maps.

**Lean 4 source** [QLambda/Domain/Presheaf/SuperoperatorInstances.lean](#)

```
theorem comp_zero_right (? : Superoperator m ?) :  
  comp ? (0 : Superoperator n m) = 0 :=  
  ext (CMap.comp_zero_right ?.cp)
```

#### 4.4.1352 Parallel composition of finite-dimensional superoperators

**Definition.** Parallel composition of finite-dimensional superoperators. Trace non-increase is proved through the intrinsic effect bound, hence applies to arbitrary positive (in particular, entangled) joint inputs.

**Construction.** Constructed by supplying each component: underlying completely positive map and trace nonincreasing. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/Presheaf/SuperoperatorInstances.lean](#)

```
def tensor (? : Superoperator n m) (? : Superoperator ? r) :  
  Superoperator (n * ?) (m * r) where  
  cp := CMap.tensor ?.cp ?.cp  
  trace_nonincreasing :=  
    CMap.trace_nonincreasing_tensor ?.cp ?.cp  
    ?.trace_nonincreasing ?.trace_nonincreasing
```

#### 4.4.1353 Underlying completely positive map of a tensor product for superoperators

**Statement.** For superoperators  $\Phi, \Psi$ :  $(\text{tensor } \Phi \Psi) . \text{cp}$  equals the tensor product of the underlying completely positive map of  $\Phi$  and the underlying completely positive map of  $\Psi$ .

**Proof.** By definition: the left-hand side,  $(\text{tensor } \Phi \Psi) . \text{cp}$ , and the right-hand side, the tensor product of the underlying completely positive map of  $\Phi$  and the underlying completely positive map of  $\Psi$ , unfold to the same term.

**Lean 4 source** [QLambda/Domain/Presheaf/SuperoperatorInstances.lean](#)

```
theorem cp_tensor (? : Superoperator n m) (? : Superoperator ? r) :  
  (tensor ? ?) .cp = CMap.tensor ?.cp ?.cp :=  
  rfl
```

#### 4.4.1354 Tensor product of zero for superoperators, in the left argument

**Statement.** For a superoperator  $\Psi$ : the tensor product of 0 and  $\Psi$  equals 0.

**Proof.** This is an instance of the extensionality for bilinear maps.

**Lean 4 source** [QLambda/Domain/Presheaf/SuperoperatorInstances.lean](#)

```
theorem tensor_zero_left (? : Superoperator ? r) :  
  tensor (0 : Superoperator n m) ? = 0 :=  
  ext (CPMap.tensor_zero_left ?.cp)
```

#### 4.4.1355 Tensor product of zero for superoperators, in the right argument

**Statement.** For a superoperator  $\Phi$ : the tensor product of  $\Phi$  and 0 equals 0.

**Proof.** This is an instance of the extensionality for bilinear maps.

**Lean 4 source** [QLambda/Domain/Presheaf/SuperoperatorInstances.lean](#)

```
theorem tensor_zero_right (? : Superoperator n m) :  
  tensor ? (0 : Superoperator ? r) = 0 :=  
  ext (CPMap.tensor_zero_right ?.cp)
```

#### 4.4.1356 Parallel composition is a bifunctor: it preserves sequential composition in both arguments

**Statement.** Parallel composition is a bifunctor: it preserves sequential composition in both arguments. Formally:  $\text{tensor} (\text{comp } \Phi_2 \ \Phi_1) (\text{comp } \Psi_2 \ \Psi_1) = \text{comp} (\text{tensor } \Phi_2 \ \Psi_2) (\text{tensor } \Phi_1 \ \Psi_1)$ .

**Proof.** This is an instance of the extensionality for bilinear maps.

**Lean 4 source** [QLambda/Domain/Presheaf/SuperoperatorInstances.lean](#)

```
theorem tensor_comp {p q : Nat}  
  (?_2 : Superoperator m p) (?_1 : Superoperator n m)  
  (?_2 : Superoperator r q) (?_1 : Superoperator ? r) :  
  tensor (comp ?_2 ?_1) (comp ?_2 ?_1) =  
  comp (tensor ?_2 ?_2) (tensor ?_1 ?_1) :=  
  ext (CPMap.tensor_comp ?_2.cp ?_1.cp ?_2.cp ?_1.cp)
```

#### 4.4.1357 Tensor product of an identity

**Statement.** For natural numbers  $n, \ell$ : the tensor product of the identity on dimension  $n$  and the identity on dimension  $\ell$  equals the identity on dimension the product of  $n$  and  $\ell$ .

**Proof.** This is an instance of the extensionality for bilinear maps.

**Lean 4 source** [QLambda/Domain/Presheaf/SuperoperatorInstances.lean](#)

```
theorem tensor_identity (n ? : Nat) :  
  tensor (identity n) (identity ?) = identity (n * ?) :=  
  ext (CPMap.tensor_identity n ?)
```

#### 4.4.1358 Action on a sub-normalized density operator

**Definition.** Action on a sub-normalized density operator.

**Construction.** Constructed by supplying each component: underlying matrix, positive semidefiniteness and trace order one. The accompanying laws are verified from the definitions.

**Lean 4 source** `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
noncomputable def apply (? : Superoperator n m) (? : SubNormalizedDensity n) :  
  SubNormalizedDensity m where  
  mat := ?.cp.applyMat ?.mat  
  posSemidef := CPMat.applyMat_posSemidef ?.cp ?.posSemidef  
  trace_le_one :=  
    (?.trace_nonincreasing ?.mat ?.posSemidef).trans ?.trace_le_one
```

#### 4.4.1359 Application of the underlying matrix for superoperators

**Statement.** For a superoperator  $\Phi$ :  $(\text{apply } \Phi \ \rho).mat = \Phi.cp.applyMat \ \rho.mat$ .

**Proof.** By definition: the left-hand side,  $(\text{apply } \Phi \ \rho).mat$ , and the right-hand side,  $\Phi.cp.applyMat \ \rho.mat$ , unfold to the same term.

**Lean 4 source** `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
theorem apply_mat (? : Superoperator n m) (? : SubNormalizedDensity n) :  
  (apply ? ?).mat = ?.cp.applyMat ?.mat :=  
  rfl
```

#### 4.4.1360 A one-Kraus isometry, covering physical embeddings and unitary maps

**Definition.** A one-Kraus isometry, covering physical embeddings and unitary maps.

**Construction.** Defined to be the superoperator of a quantum operation of the map induced by the isometry  $hA$ .

**Lean 4 source** `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
def ofIsometry (A : KrausOperator n m) (hA : A? * A = 1) :  
  Superoperator n m :=  
  ofQuantumOperation (QuantumOperation.ofIsometry A hA)
```

#### 4.4.1361 A square isometry, named for its usual physical use

**Definition.** A square isometry, named for its usual physical use.

**Construction.** Defined to be the map induced by the isometry  $hU$ .

**Lean 4 source** `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
def unitary (U : KrausOperator n n) (hU : U? * U = 1) :  
  Superoperator n n :=  
  ofIsometry U hU
```

#### 4.4.1362 Underlying completely positive map of the map induced by an isometry for superoperators

**Statement.** If  $A^\dagger * A = 1$ , then  $(\text{ofIsometry } A \text{ } hA) . \text{cp}$  equals the CP map with Kraus family  $[A]$ .

**Proof.** By definition: the left-hand side,  $(\text{ofIsometry } A \text{ } hA) . \text{cp}$ , and the right-hand side, the CP map with Kraus family  $[A]$ , unfold to the same term.

**Lean 4 source** [QLambda/Domain/Presheaf/SuperoperatorInstances.lean](#)

```
theorem cp_ofIsometry (A : KrausOperator n m) (hA : A? * A = 1) :
  (ofIsometry A hA).cp = CPMMap.ofKraus [A] :=
  rfl
```

#### 4.4.1363 The permutation matrix associated to an equivalence of finite bases

**Definition.** The permutation matrix associated to an equivalence of finite bases.

**Construction.** The map sending  $i \ j$  to  $\text{if } i = e \ j \text{ then } 1 \text{ else } 0$ .

**Lean 4 source** [QLambda/Domain/Presheaf/SuperoperatorInstances.lean](#)

```
def equivalenceMatrix {n m : Nat} (e : Fin n → Fin m) :
  Matrix (Fin m) (Fin n) :=
  fun i j => if i = e j then 1 else 0
```

#### 4.4.1364 The equivalence matrix is an isometry

**Statement.** For natural numbers  $n, m$ , an index  $e$ : the product of  $(\text{equivalenceMatrix } e)^\dagger$  and the equivalence matrix of  $e$  equals 1.

**Proof.** Both sides are compared pointwise (by extensionality). The argument splits on the relevant condition. An equation between variables is used to substitute one for the other. The goal is simplified using standard identities for matrices, the definition of the equivalence matrix and the fact that observational equality is symmetric.

**Lean 4 source** [QLambda/Domain/Presheaf/SuperoperatorInstances.lean](#)

```
theorem equivalenceMatrix_isometry {n m : Nat} (e : Fin n → Fin m) :
  (equivalenceMatrix e)? * equivalenceMatrix e = 1 := by
  ext i j
  simp only [Matrix.mul_apply, Matrix.conjTranspose_apply, equivalenceMatrix]
  by_cases hij : i = j
  * subst j
    simp
  * simp [hij, Ne.symm hij]
```

#### 4.4.1365 Equivalence matrix of a composite for superoperators

**Statement.** For natural numbers  $n, m, \ell$ , indexes  $e, f$ : the equivalence matrix of the transitivity of  $f$  equals the product of the equivalence matrix of  $f$  and the equivalence matrix of  $e$ .

**Proof.** Both sides are compared pointwise (by extensionality). The goal is simplified using the definition of the equivalence matrix and standard identities for matrices.

**Lean 4 source** [QLambda/Domain/Presheaf/SuperoperatorInstances.lean](#)

```
theorem equivalenceMatrix_comp {n m ? : Nat}
  (e : Fin n ? Fin m) (f : Fin m ? Fin ?) :
  equivalenceMatrix (e.trans f) =
    equivalenceMatrix f * equivalenceMatrix e := by
  ext i j
  simp [equivalenceMatrix, Matrix.mul_apply]
  rfl
```

#### 4.4.1366 A finite basis equivalence as a reversible superoperator

**Definition.** A finite basis equivalence as a reversible superoperator.

**Construction.** Defined to be the map induced by the isometry the equivalence matrix isometry property of  $e$ .

**Lean 4 source** [QLambda/Domain/Presheaf/SuperoperatorInstances.lean](#)

```
def ofEquivalence {n m : Nat} (e : Fin n ? Fin m) :
  Superoperator n m :=
  ofIsometry (equivalenceMatrix e) (equivalenceMatrix_isometry e)
```

#### 4.4.1367 Map induced by an index equivalence of a composite for superoperators

**Statement.** For natural numbers  $n, m, \ell$ , indexes  $e, f$ : the composite of the map induced by an index equivalence of  $f$  after the map induced by an index equivalence of  $e$  equals the map induced by an index equivalence of the transitivity of  $f$ .

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the underlying completely positive map of a composite for superoperators, the action on a matrix of a composition, the definition of the map induced by an index equivalence and the definition of the map induced by an isometry.

**Lean 4 source** [QLambda/Domain/Presheaf/SuperoperatorInstances.lean](#)

```
theorem ofEquivalence_comp {n m ? : Nat}
  (e : Fin n ? Fin m) (f : Fin m ? Fin ?) :
  comp (ofEquivalence f) (ofEquivalence e) =
    ofEquivalence (e.trans f) := by
  apply ext
  apply CPMat.ext_apply
  intro ?
  simp only [cp_comp, CPMat.applyMat_comp]
  simp only [ofEquivalence, ofIsometry, ofQuantumOperation, ofKraus,
    CPMat.applyMat_ofKraus, KrausFamily.applyMat,
    QuantumOperation.ofIsometry]
  simp only [List.map_cons, List.map_nil, List.sum_cons, List.sum_nil,
    add_zero]
  rw [equivalenceMatrix_comp, Matrix.conjTranspose_mul]
  simp only [Matrix.mul_assoc]
```

#### 4.4.1368 Reflexivity of the map induced by an index equivalence

**Statement.** For a natural number  $n$ : the map induced by an index equivalence of the reflexivity of  $\text{Fin } n$  equals the identity on dimension  $n$ .

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the definition of the map induced by an index equivalence, the definition of the identity, the definition of the map induced by an isometry and the definition of the superoperator of a quantum operation.

**Lean 4 source** `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
theorem ofEquivalence_refl (n : Nat) :
  ofEquivalence (Equiv.refl (Fin n)) = identity n := by
  apply ext
  apply CPMat.ext_apply
  intro ?
  simp only [ofEquivalence, identity, CPMat.identity, ofIsometry,
    ofQuantumOperation, ofKraus, CPMat.applyMat_ofKraus,
    KrausFamily.applyMat, QuantumOperation.ofIsometry,
    KrausFamily.identity]
  have h : equivalenceMatrix (Equiv.refl (Fin n)) = 1 := by
    ext i j
    simp [equivalenceMatrix, Matrix.one_apply]
    rfl
  rw [h]
```

#### 4.4.1369 Composition of the map induced by an index equivalence of the finite index congruence for superoperators

**Statement.** For natural numbers  $n, a, b$ , a superoperator  $x$ : if  $a = b$ , then the composite of the map induced by an index equivalence of  $\text{finCongr } h$  after  $x$  equals the Hadamard gate on wire  $x$ .

**Proof.** An equation between variables is used to substitute one for the other. The goal is closed by simplification with the defining equations.

**Lean 4 source** `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
theorem comp_ofEquivalence_finCongr {n a b : Nat} (h : a = b)
  (x : Superoperator n a) :
  comp (ofEquivalence (finCongr h)) x = h |> x := by
  subst b
  simp
```

#### 4.4.1370 The canonical reassociation of three finite tensor-product bases

**Definition.** The canonical reassociation of three finite tensor-product bases.

**Construction.** Defined by an explicit formula built from the symmetry, the prod congruence, the reflexivity and the prod associativity.

**Lean 4 source** `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
def tensorAssociatorEquiv (a b c : Nat) :
  Fin ((a * b) * c) ? Fin (a * (b * c)) :=
```

```

finProdFinEquiv.symm |>.trans
  ((Equiv.prodCongr finProdFinEquiv.symm (Equiv.refl (Fin c))).trans
    ((Equiv.prodAssoc (Fin a) (Fin b) (Fin c)).trans
      ((Equiv.prodCongr (Equiv.refl (Fin a)) finProdFinEquiv).trans
        finProdFinEquiv)))

```

#### 4.4.1371 The canonical left-unitor equivalence of finite tensor-product bases

**Definition.** The canonical left-unitor equivalence of finite tensor-product bases.

**Construction.** Defined by an explicit formula built from the symmetry, the prod congruence, the finite index one equivalence and the reflexivity.

**Lean 4 source** [QLambda/Domain/Presheaf/SuperoperatorInstances.lean](#)

```

def tensorLeftUnitorEquiv (a : Nat) : Fin (1 * a) ? Fin a :=
  finProdFinEquiv.symm |>.trans
    ((Equiv.prodCongr finOneEquiv (Equiv.refl (Fin a))).trans
      (Equiv.punitProd (Fin a)))

```

#### 4.4.1372 The canonical right-unitor equivalence of finite tensor-product bases

**Definition.** The canonical right-unitor equivalence of finite tensor-product bases.

**Construction.** Defined by an explicit formula built from the symmetry, the prod congruence, the reflexivity and the finite index one equivalence.

**Lean 4 source** [QLambda/Domain/Presheaf/SuperoperatorInstances.lean](#)

```

def tensorRightUnitorEquiv (a : Nat) : Fin (a * 1) ? Fin a :=
  finProdFinEquiv.symm |>.trans
    ((Equiv.prodCongr (Equiv.refl (Fin a)) finOneEquiv).trans
      (Equiv.prodPUnit (Fin a)))

```

#### 4.4.1373 The canonical swap of two finite tensor-product bases

**Definition.** The canonical swap of two finite tensor-product bases.

**Construction.** Defined by an explicit formula built from the symmetry, the prod commutativity and the finite index prod finite index equivalence.

**Lean 4 source** [QLambda/Domain/Presheaf/SuperoperatorInstances.lean](#)

```

def tensorSwapEquiv (a b : Nat) : Fin (a * b) ? Fin (b * a) :=
  finProdFinEquiv.symm |>.trans
    ((Equiv.prodComm (Fin a) (Fin b)).trans finProdFinEquiv)

```

#### 4.4.1374 Tensor product of finite basis equivalences

**Definition.** Tensor product of finite basis equivalences.

**Construction.** Defined to be the symmetry of  $|\rangle.\text{trans}$  and  $(\text{Equiv.prodCongr } e \ f).\text{trans}$   $\text{finProdFinEquiv}$ .

**Lean 4 source** [QLambda/Domain/Presheaf/SuperoperatorInstances.lean](#)

```
def tensorEquiv {a a' b b' : Nat}
  (e : Fin a ? Fin a') (f : Fin b ? Fin b') :
  Fin (a * b) ? Fin (a' * b') :=
  finProdFinEquiv.symm |>.trans
  ((Equiv.prodCongr e f).trans finProdFinEquiv)
```

#### 4.4.1375 Pointwise formula for the Choi matrix of the map induced by an index equivalence

**Statement.** For natural numbers  $n, m$ , indexes  $e, a, b, i, j$ :  $(\text{ofEquivalence } e).\text{cp.choi } (a, i) (b, j) = (\text{if } a = e \ i \wedge b = e \ j \text{ then } 1 \text{ else } 0)$ .

**Proof.** The argument splits on the relevant condition. The goal is simplified using the definition of the map induced by an index equivalence, the definition of the map induced by an isometry, the definition of the superoperator of a quantum operation and the definition of the map determined by a Kraus family.

**Lean 4 source** [QLambda/Domain/Presheaf/SuperoperatorInstances.lean](#)

```
theorem choi_ofEquivalence_apply {n m : Nat} (e : Fin n ? Fin m)
  (a b : Fin m) (i j : Fin n) :
  (ofEquivalence e).cp.choi (a, i) (b, j) =
    (if a = e i /\ b = e j then 1 else 0) := by
  simp only [ofEquivalence, ofIsometry, ofQuantumOperation, ofKraus,
    CPMMap.choi_ofKraus, QuantumOperation.ofIsometry,
    KrausFamily.choi_single, KrausFamily.choiTerm, equivalenceMatrix]
  by_cases hai : a = e i <=> by_cases hbj : b = e j <=>
  simp [hai, hbj]
```

#### 4.4.1376 Choi matrix of a composite of the map induced by an index equivalence for superoperators, in the right argument

**Statement.** For natural numbers  $n, m, \ell$ , indexes  $e, a, b, i, j$ , a superoperator  $\Phi$ :  $(\text{comp } \Phi (\text{ofEquivalence } e)).\text{cp.choi } (a, i) (b, j) = \Phi.\text{cp.choi } (a, e \ i) (b, e \ j)$ .

**Proof.** The key step rewrites with the underlying completely positive map of a composite for superoperators, the coordinate formula for intrinsic Choi composition, the pointwise formula for the Choi matrix of the map induced by an index equivalence and standard identities for finite sums.

**Lean 4 source** [QLambda/Domain/Presheaf/SuperoperatorInstances.lean](#)

```
theorem choi_comp_ofEquivalence_right {n m ? : Nat}
  (e : Fin n ? Fin m) (? : Superoperator m ?)
  (a b : Fin ?) (i j : Fin n) :
  (comp ? (ofEquivalence e)).cp.choi (a, i) (b, j) =
    ?.cp.choi (a, e i) (b, e j) := by
  classical
  rw [cp_comp, CPMMap.choi_comp_apply]
  simp only [choi_ofEquivalence_apply]
  rw [Finset.sum_eq_single (e i)]
```



```

* rw [Finset.sum_eq_single (e j)]
* simp
* intro y _ hy
  simp [hy]
* intro h
  exact (h (Finset.mem_univ _)).elim
* intro x _ hx
  simp [hx]
* intro h
  exact (h (Finset.mem_univ _)).elim

```

#### 4.4.1377 Choi matrix of a composite of the map induced by an index equivalence for superoperators, in the left argument

**Statement.** For natural numbers  $n, m, \ell$ , indexes  $e, a, b, i, j$ , a superoperator  $\Phi$ :  $(\text{comp } (\text{ofEquivalence } e) \Phi).cp.choi (a, i) (b, j) = \Phi.cp.choi (e.symm a, i) (e.symm b, j)$ .

**Proof.** The key step rewrites with the underlying completely positive map of a composite for superoperators, the coordinate formula for intrinsic Choi composition, the pointwise formula for the Choi matrix of the map induced by an index equivalence and standard identities for finite sums.

**Lean 4 source** [QLambda/Domain/Presheaf/SuperoperatorInstances.lean](#)

```

theorem choi_comp_ofEquivalence_left {n m ? : Nat}
  (e : Fin m ? Fin ?) (? : Superoperator n m)
  (a b : Fin ?) (i j : Fin n) :
  (comp (ofEquivalence e) ?).cp.choi (a, i) (b, j) =
    ?.cp.choi (e.symm a, i) (e.symm b, j) := by
  classical
  rw [cp_comp, CPMMap.choi_comp_apply]
  simp only [choi_ofEquivalence_apply]
  rw [Finset.sum_eq_single (e.symm a)]
  * rw [Finset.sum_eq_single (e.symm b)]
  * simp
  * intro y _ hy
    have hne : b != e y := by
      intro h
      apply hy
      apply e.injective
      simp using h.symm
    simp [hne]
  * intro h
    exact (h (Finset.mem_univ _)).elim
* intro x _ hx
  have hne : a != e x := by
    intro h
    apply hx
    apply e.injective
    simp using h.symm
  simp [hne]
* intro h
  exact (h (Finset.mem_univ _)).elim

```

#### 4.4.1378 Effect of a composite of the map induced by an index equivalence for superoperators, in the left argument

**Statement.** Left composition with a basis equivalence preserves the input effect (unitary postprocessing does not change the Heisenberg effect). Formally:  $(\text{comp } (\text{ofEquivalence } e) \ \Phi).cp.\text{effect} = \Phi.cp.\text{effect}$ .

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the definition of the effect and standard identities for finite types.

**Lean 4 source** `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
theorem effect_comp_ofEquivalence_left {n m ? : Nat}
  (e : Fin m ? Fin ?) (? : Superoperator n m) :
  (comp (ofEquivalence e) ?).cp.effect = ?.cp.effect := by
  ext i j
  simp only [CMapMap.effect]
  have hterm (a : Fin ?) :
    (comp (ofEquivalence e) ?).cp.choi (a, j) (a, i) =
      ?.cp.choi (e.symm a, j) (e.symm a, i) :=
    choi_comp_ofEquivalence_left e ? a a j i
  simp_rw [hterm]
  exact Fintype.sum_equiv e.symm _ _ fun _ => rfl
```

#### 4.4.1379 Tensor product of a map induced by an index equivalence

**Statement.** For natural numbers  $a, a', b, b'$ , indexes  $e, f$ : the tensor product of the map induced by an index equivalence of  $e$  and the map induced by an index equivalence of  $f$  equals the map induced by an index equivalence of the tensor product equivalence of  $e$  and  $f$ .

**Proof.** By case analysis on  $ai$ . The key step rewrites with the underlying completely positive map of a tensor product for superoperators, the Choi matrix of a tensor product for completely positive maps, standard identities for matrices and the pointwise formula for the Choi matrix of the map induced by an index equivalence.

**Lean 4 source** `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
theorem tensor_ofEquivalence {a a' b b' : Nat}
  (e : Fin a ? Fin a') (f : Fin b ? Fin b') :
  tensor (ofEquivalence e) (ofEquivalence f) =
    ofEquivalence (tensorEquiv e f) := by
  apply ext
  apply CMapMap.ext
  ext ai bj
  rcases ai with <x, i>
  rcases bj with <y, j>
  simp only [cp_tensor, CMapMap.choi_tensor, Matrix.reindex_apply,
    Matrix.submatrix_apply, Matrix.kroneckerMap_apply,
    choi_ofEquivalence_apply]
  dsimp [CMapMap.choiTensorEquiv, tensorEquiv]
  rw [choi_ofEquivalence_apply, choi_ofEquivalence_apply]
  have hx :
    x = finProdFinEquiv (e i.divNat, f i.modNat) <->
      x.divNat = e i.divNat /\ x.modNat = f i.modNat := by
```

```

constructor
* intro h
  subst x
  have h := finProdFinEquiv.left_inv (e i.divNat, f i.modNat)
  exact <congrArg Prod.fst h, congrArg Prod.snd h>
* rintro <h_1, h_2>
  rw [ <- finProdFinEquiv.apply_symm_apply x]
  exact congrArg finProdFinEquiv (Prod.ext h_1 h_2)
have hy :
  y = finProdFinEquiv (e j.divNat, f j.modNat) <->
  y.divNat = e j.divNat /\ y.modNat = f j.modNat := by
constructor
* intro h
  subst y
  have h := finProdFinEquiv.left_inv (e j.divNat, f j.modNat)
  exact <congrArg Prod.fst h, congrArg Prod.snd h>
* rintro <h_1, h_2>
  rw [ <- finProdFinEquiv.apply_symm_apply y]
  exact congrArg finProdFinEquiv (Prod.ext h_1 h_2)
split <;> split <;> simp_all

```

#### 4.4.1380 Reversible superoperator implementing tensor reassociation

**Definition.** Reversible superoperator implementing tensor reassociation.

**Construction.** Defined to be the map induced by an index equivalence of the tensor product associator equivalence of  $a, b, c$ .

**Lean 4 source** [QLambda/Domain/Presheaf/SuperoperatorInstances.lean](#)

```

def tensorAssociator (a b c : Nat) :
  Superoperator ((a * b) * c) (a * (b * c)) :=
  ofEquivalence (tensorAssociatorEquiv a b c)

```

#### 4.4.1381 Reversible superoperator implementing the left tensor unitor

**Definition.** Reversible superoperator implementing the left tensor unitor.

**Construction.** Defined to be the map induced by an index equivalence of the tensor product left unitor equivalence of  $a$ .

**Lean 4 source** [QLambda/Domain/Presheaf/SuperoperatorInstances.lean](#)

```

def tensorLeftUnitor (a : Nat) : Superoperator (1 * a) a :=
  ofEquivalence (tensorLeftUnitorEquiv a)

```

#### 4.4.1382 Reversible superoperator implementing the right tensor unitor

**Definition.** Reversible superoperator implementing the right tensor unitor.

**Construction.** Defined to be the map induced by an index equivalence of the tensor product right unitor equivalence of  $a$ .

#### Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
def tensorRightUnitor (a : Nat) : Superoperator (a * 1) a :=  
  ofEquivalence (tensorRightUnitorEquiv a)
```

#### 4.4.1383 Reversible superoperator implementing tensor-factor swap

**Definition.** Reversible superoperator implementing tensor-factor swap.

**Construction.** Defined to be the map induced by an index equivalence of the tensor product swap equivalence of  $a$  and  $b$ .

#### Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
def tensorSwap (a b : Nat) : Superoperator (a * b) (b * a) :=  
  ofEquivalence (tensorSwapEquiv a b)
```

#### 4.4.1384 Definition of the inverse tensor associator of superoperators

**Definition.** The inverse tensor associator of  $a$ ,  $b$  and  $c$  is a superoperator from  $a * (b * c)$  to  $(a * b) * c$ .

**Construction.** Defined to be the map induced by an index equivalence of  $(\text{tensorAssociatorEquiv } a \ b \ c).symm$ .

#### Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
def tensorAssociatorInv (a b c : Nat) :  
  Superoperator (a * (b * c)) ((a * b) * c) :=  
  ofEquivalence (tensorAssociatorEquiv a b c).symm
```

#### 4.4.1385 Definition of the inverse tensor left unitor of superoperators

**Definition.** The inverse tensor left unitor of  $a$  is a superoperator from  $a$  to  $1 * a$ .

**Construction.** Defined to be the map induced by an index equivalence of  $(\text{tensorLeftUnitorEquiv } a).symm$ .

#### Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
def tensorLeftUnitorInv (a : Nat) : Superoperator a (1 * a) :=  
  ofEquivalence (tensorLeftUnitorEquiv a).symm
```

#### 4.4.1386 Definition of the inverse tensor right unitor of superoperators

**Definition.** The inverse tensor right unitor of  $a$  is a superoperator from  $a$  to  $a * 1$ .

**Construction.** Defined to be the map induced by an index equivalence of  $(\text{tensorRightUnitorEquiv } a).symm$ .

#### Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
def tensorRightUnitorInv (a : Nat) : Superoperator a (a * 1) :=
  ofEquivalence (tensorRightUnitorEquiv a).symm
```

#### 4.4.1387 The tensor associator and its inverse compose to the identity

**Statement.** For natural numbers  $a, b, c$ : the composite of the tensor associator of  $a, b, c$  after the inverse tensor associator of  $a, b, c$  equals the identity on dimension the product of  $a$  and the Boolean of  $*$  and  $c$ .

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the definition of the tensor associator, the definition of the inverse tensor associator, the map induced by an index equivalence of a composite for superoperators and the reflexivity of the map induced by an index equivalence.

**Lean 4 source** [QLambda/Domain/Presheaf/SuperoperatorInstances.lean](#)

```
theorem tensorAssociator_hom_inv (a b c : Nat) :
  comp (tensorAssociator a b c) (tensorAssociatorInv a b c) =
    identity (a * (b * c)) := by
  rw [tensorAssociator, tensorAssociatorInv, ofEquivalence_comp]
  convert ofEquivalence_refl (a * (b * c))
  ext
  simp
```

#### 4.4.1388 The tensor associator and its inverse compose to the identity

**Statement.** For natural numbers  $a, b, c$ : the composite of the inverse tensor associator of  $a, b, c$  after the tensor associator of  $a, b, c$  equals the identity on dimension the product of  $a$  of  $*$  and  $b$  and  $c$ .

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the definition of the tensor associator, the definition of the inverse tensor associator, the map induced by an index equivalence of a composite for superoperators and the reflexivity of the map induced by an index equivalence.

**Lean 4 source** [QLambda/Domain/Presheaf/SuperoperatorInstances.lean](#)

```
theorem tensorAssociator_inv_hom (a b c : Nat) :
  comp (tensorAssociatorInv a b c) (tensorAssociator a b c) =
    identity ((a * b) * c) := by
  rw [tensorAssociator, tensorAssociatorInv, ofEquivalence_comp]
  convert ofEquivalence_refl ((a * b) * c)
  ext
  simp
```

#### 4.4.1389 The tensor left unitor and its inverse compose to the identity

**Statement.** For a natural number  $a$ : the composite of the tensor left unitor of  $a$  after the inverse tensor left unitor of  $a$  equals the identity on dimension  $a$ .

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the definition of the tensor left unitor, the definition of the inverse tensor left unitor, the map induced by an index equivalence of a composite for superoperators and the reflexivity of the map induced by an index equivalence.

**Lean 4 source** [QLambda/Domain/Presheaf/SuperoperatorInstances.lean](#)

```

theorem tensorLeftUnitor_hom_inv (a : Nat) :
  comp (tensorLeftUnitor a) (tensorLeftUnitorInv a) = identity a := by
  rw [tensorLeftUnitor, tensorLeftUnitorInv, ofEquivalence_comp]
  convert ofEquivalence_refl a
  ext
  simp

```

#### 4.4.1390 The tensor left unitor and its inverse compose to the identity

**Statement.** For a natural number  $a$ : the composite of the inverse tensor left unitor of  $a$  after the tensor left unitor of  $a$  equals the identity on dimension the product of 1 and  $a$ .

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the definition of the tensor left unitor, the definition of the inverse tensor left unitor, the map induced by an index equivalence of a composite for superoperators and the reflexivity of the map induced by an index equivalence.

**Lean 4 source** [QLambda/Domain/Presheaf/SuperoperatorInstances.lean](#)

```

theorem tensorLeftUnitor_inv_hom (a : Nat) :
  comp (tensorLeftUnitorInv a) (tensorLeftUnitor a) =
    identity (1 * a) := by
  rw [tensorLeftUnitor, tensorLeftUnitorInv, ofEquivalence_comp]
  convert ofEquivalence_refl (1 * a)
  ext
  simp

```

#### 4.4.1391 The tensor right unitor and its inverse compose to the identity

**Statement.** For a natural number  $a$ : the composite of the tensor right unitor of  $a$  after the inverse tensor right unitor of  $a$  equals the identity on dimension  $a$ .

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the definition of the tensor right unitor, the definition of the inverse tensor right unitor, the map induced by an index equivalence of a composite for superoperators and the reflexivity of the map induced by an index equivalence.

**Lean 4 source** [QLambda/Domain/Presheaf/SuperoperatorInstances.lean](#)

```

theorem tensorRightUnitor_hom_inv (a : Nat) :
  comp (tensorRightUnitor a) (tensorRightUnitorInv a) = identity a := by
  rw [tensorRightUnitor, tensorRightUnitorInv, ofEquivalence_comp]
  convert ofEquivalence_refl a
  ext
  simp

```

#### 4.4.1392 The tensor right unitor and its inverse compose to the identity

**Statement.** For a natural number  $a$ : the composite of the inverse tensor right unitor of  $a$  after the tensor right unitor of  $a$  equals the identity on dimension the product of  $a$  and 1.

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the definition of the tensor right unitor, the definition of the inverse tensor right unitor, the map induced by an index equivalence of a composite for superoperators and the reflexivity of the map induced by an index equivalence.

#### Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
theorem tensorRightUnitor_inv_hom (a : Nat) :
  comp (tensorRightUnitorInv a) (tensorRightUnitor a) =
    identity (a * 1) := by
  rw [tensorRightUnitor, tensorRightUnitorInv, ofEquivalence_comp]
  convert ofEquivalence_refl (a * 1)
  ext
  simp
```

#### 4.4.1393 The tensor swap is an involution

**Statement.** For natural numbers  $a, b$ : the composite of the tensor swap of  $b$  and  $a$  after the tensor swap of  $a$  and  $b$  equals the identity on dimension the product of  $a$  and  $b$ .

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the definition of the tensor swap, the map induced by an index equivalence of a composite for superoperators, the definition of the tensor product swap equivalence and the reflexivity of the map induced by an index equivalence.

#### Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
theorem tensorSwap_involutive (a b : Nat) :
  comp (tensorSwap b a) (tensorSwap a b) = identity (a * b) := by
  rw [tensorSwap, tensorSwap, ofEquivalence_comp]
  convert ofEquivalence_refl (a * b)
  ext x
  simp [tensorSwapEquiv]
  exact Nat.mod_add_div x.val b
```

#### 4.4.1394 Tensor product of the pentagon for superoperators

**Statement.** For natural numbers  $a, b, c, d$ : the composite of the tensor associator of  $a, b, c * d$  after the tensor associator of  $a * b, c, d$  equals the composite of the tensor product of identity  $a$  and  $\text{tensorAssociator } b \ c \ d$  after the composite of  $\text{tensorAssociator } a \ (b * c) \ d$  after  $\text{tensor } (\text{tensorAssociator } a \ b \ c) \ (\text{identity } d)$ .

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the reflexivity of the map induced by an index equivalence, the definition of the tensor associator, the tensor product of a map induced by an index equivalence and the definition of the tensor product equivalence.

#### Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
theorem tensor_pentagon (a b c d : Nat) :
  comp (tensorAssociator a b (c * d))
    (tensorAssociator (a * b) c d) =
    comp (tensor (identity a) (tensorAssociator b c d))
      (comp (tensorAssociator a (b * c) d)
        (tensor (tensorAssociator a b c) (identity d))) := by
  rw [ <- ofEquivalence_refl a, <- ofEquivalence_refl d]
  simp only [tensorAssociator, tensor_ofEquivalence, tensorEquiv,
    ofEquivalence_comp]
  congr 1
  ext x
  simp [tensorAssociatorEquiv]
```

#### 4.4.1395 Tensor product of the triangle for superoperators

**Statement.** For natural numbers  $a, b$ : the composite of the tensor product of `identity a` and `tensor LeftUnitor b` after the tensor associator of  $a$  and  $b$  at 1 equals the tensor product of the tensor right unitor of  $a$  and the identity on dimension  $b$ .

**Proof.** Both sides are compared pointwise (by extensionality). The goal is simplified using the definition of the tensor associator, the definition of the tensor left unitor, the definition of the tensor right unitor and the reflexivity of the map induced by an index equivalence.

**Lean 4 source** `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
theorem tensor_triangle (a b : Nat) :
  comp (tensor (identity a) (tensorLeftUnitor b))
    (tensorAssociator a 1 b) =
    tensor (tensorRightUnitor a) (identity b) := by
  simp only [tensorAssociator, tensorLeftUnitor, tensorRightUnitor,
    <- ofEquivalence_refl, tensor_ofEquivalence, ofEquivalence_comp]
  congr 1
  ext x
  simp [tensorAssociatorEquiv, tensorLeftUnitorEquiv,
    tensorRightUnitorEquiv, tensorEquiv]
```

#### 4.4.1396 Right-unitor / associator coherence on finite tensor bases: $(\text{id} \otimes \rho) \circ \alpha = \rho$

**Statement.** Right-unitor / associator coherence on finite tensor bases:  $(\text{id} \otimes \rho) \circ \alpha = \rho$ . Formally: `comp (tensor (identity a) (tensorRightUnitor b)) (tensorAssociator a b 1) = tensorRightUnitor (a * b)`.

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the definition of the tensor associator, the definition of the tensor right unitor, the reflexivity of the map induced by an index equivalence and the tensor product of a map induced by an index equivalence.

**Lean 4 source** `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
theorem tensor_rightUnitor_associator (a b : Nat) :
  comp (tensor (identity a) (tensorRightUnitor b))
    (tensorAssociator a b 1) =
    tensorRightUnitor (a * b) := by
  simp only [tensorAssociator, tensorRightUnitor,
    <- ofEquivalence_refl, tensor_ofEquivalence, ofEquivalence_comp]
  congr 1
  ext x
  simp [tensorAssociatorEquiv, tensorRightUnitorEquiv, tensorEquiv]
  rw [Nat.mul_comm b]
  exact Nat.mod_add_div' (x) b
```

#### 4.4.1397 Tensor product of the hexagon for superoperators

**Statement.** For natural numbers  $a, b, c$ : the composite of the tensor swap of  $a$  and  $b * c$  after the tensor associator of  $a, b, c$  equals an explicit expression in the composition, the inverse tensor associator, the tensor product and the identity.



**Proof.** Both sides are compared pointwise (by extensionality). The goal is simplified using the definition of the tensor associator, the definition of the inverse tensor associator, the definition of the tensor swap and the reflexivity of the map induced by an index equivalence.

**Lean 4 source** `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
theorem tensor_hexagon (a b c : Nat) :
  comp (tensorSwap a (b * c)) (tensorAssociator a b c) =
    comp (tensorAssociatorInv b c a)
      (comp (tensor (identity b) (tensorSwap a c))
        (comp (tensorAssociator b a c)
          (tensor (tensorSwap a b) (identity c)))) := by
  simp only [tensorAssociator, tensorAssociatorInv, tensorSwap,
    <- ofEquivalence_refl, tensor_ofEquivalence, ofEquivalence_comp]
  congr 1
  ext x
  simp [tensorAssociatorEquiv, tensorSwapEquiv, tensorEquiv]
```

#### 4.4.1398 Reassociation in the reverse direction, expressed using only forward associators and symmetric braidings

**Statement.** Reassociation in the reverse direction, expressed using only forward associators and symmetric braidings.

**Proof.** Both sides are compared pointwise (by extensionality). The goal is simplified using the definition of the tensor associator, the definition of the inverse tensor associator, the definition of the tensor swap and the map induced by an index equivalence of a composite for superoperators.

**Lean 4 source** `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
theorem tensorAssociatorInv_braiding (a b c : Nat) :
  comp (tensorSwap c (a * b))
    (comp (tensorAssociator c a b)
      (comp (tensorSwap b (c * a))
        (comp (tensorAssociator b c a)
          (tensorSwap a (b * c))))) =
    tensorAssociatorInv a b c := by
  simp only [tensorAssociator, tensorAssociatorInv, tensorSwap,
    ofEquivalence_comp]
  congr 1
  ext x
  simp [tensorAssociatorEquiv, tensorSwapEquiv]
```

#### 4.4.1399 Naturality of the tensor associator

**Statement.** For natural numbers  $a, a', b, b', c, c'$ , superoperators  $f, g$ : if  $\text{Superoperator } c \ c'$ , then the composite of the tensor associator of  $a', b', c'$  after the tensor product of  $\text{tensor } f \ g$  and  $h$  equals the composite of the tensor product of  $f$  and  $\text{tensor } g \ h$  after the tensor associator of  $a, b, c$ .

**Proof.** By case analysis on  $a$ . The key step rewrites with the Choi matrix of a composite of the map induced by an index equivalence for superoperators, in the left argument, the Choi matrix of a composite of the map induced by an index equivalence for superoperators, in the right argument, the underlying completely

positive map of a tensor product for superoperators and the Choi matrix of a tensor product for completely positive maps. The remaining identity is a polynomial identity in a commutative ring.

#### Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
theorem tensorAssociator_naturality
  {a a' b b' c c' : Nat}
  (f : Superoperator a a') (g : Superoperator b b')
  (h : Superoperator c c') :
  comp (tensorAssociator a' b' c') (tensor (tensor f g) h) =
    comp (tensor f (tensor g h)) (tensorAssociator a b c) := by
  apply ext
  apply CPMMap.ext
  ext ai bj
  rcases ai with <x, i>
  rcases bj with <y, j>
  rw [show tensorAssociator a' b' c' =
    ofEquivalence (tensorAssociatorEquiv a' b' c') from rfl,
    choi_comp_ofEquivalence_left]
  rw [show tensorAssociator a b c =
    ofEquivalence (tensorAssociatorEquiv a b c) from rfl,
    choi_comp_ofEquivalence_right]
  simp only [cp_tensor, CPMMap.choi_tensor, Matrix.reindex_apply,
    Matrix.submatrix_apply, Matrix.kroneckerMap_apply]
  dsimp [CPMap.choiTensorEquiv, tensorAssociatorEquiv]
  simp
  ring
```

#### 4.4.1400 Natural form of tensor product right unitor associator with a unit wire

**Statement.** Natural form of `tensor_rightUnitor_associator` with a unit wire.

**Proof.** The claim follows from a chain of equalities (or inequalities). The key step rewrites with the fact that composition for superoperators is associative, the fact that parallel composition is a bifunctor: it preserves sequential composition in both arguments, the naturality of the tensor associator and the right-unitor / associator coherence on finite tensor bases:  $(\text{id} \otimes \rho) \circ \alpha = \rho$ .

#### Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
theorem tensor_rightUnitor_associator_naturality {u : Nat}
  (a b : Nat) (q : Superoperator u 1) :
  comp
    (tensor (identity a)
      (comp (tensorRightUnitor b)
        (tensor (identity b) q)))
    (tensorAssociator a b u) =
  comp (tensorRightUnitor (a * b))
    (tensor (identity (a * b)) q) := by
  calc
  comp
    (tensor (identity a)
      (comp (tensorRightUnitor b)
        (tensor (identity b) q)))
    (tensorAssociator a b u) =
  comp (tensor (identity a) (tensorRightUnitor b))
```

```

      (comp (tensor (identity a) (tensor (identity b) q))
        (tensorAssociator a b u)) := by
        rw [comp_assoc, <- tensor_comp]; simp
_ = comp (tensor (identity a) (tensorRightUnitor b))
  (comp (tensorAssociator a b 1)
    (tensor (tensor (identity a) (identity b)) q)) := by
    rw [ <- tensorAssociator_naturality]
_ = comp
  (comp (tensor (identity a) (tensorRightUnitor b))
    (tensorAssociator a b 1))
  (tensor (tensor (identity a) (identity b)) q) := by
    rw [comp_assoc]
_ = comp (tensorRightUnitor (a * b))
  (tensor (tensor (identity a) (identity b)) q) := by
    rw [tensor_rightUnitor_associator]
_ = comp (tensorRightUnitor (a * b))
  (tensor (identity (a * b)) q) := by
    rw [tensor_identity]

```

#### 4.4.1401 Naturality of the tensor left unitor

**Statement.** For natural numbers  $a, a'$ , a superoperator  $f$ : the composite of the tensor left unitor of  $a'$  after the tensor product of  $\text{identity } 1$  and  $f$  equals the composite of  $f$  after the tensor left unitor of  $a$ .

**Proof.** By case analysis on  $ai$ . The key step rewrites with the Choi matrix of a composite of the map induced by an index equivalence for superoperators, in the left argument, the Choi matrix of a composite of the map induced by an index equivalence for superoperators, in the right argument, the underlying completely positive map of a tensor product for superoperators and the Choi matrix of a tensor product for completely positive maps.

**Lean 4 source** [QLambda/Domain/Presheaf/SuperoperatorInstances.lean](#)

```

theorem tensorLeftUnitor_naturality {a a' : Nat}
  (f : Superoperator a a') :
  comp (tensorLeftUnitor a') (tensor (identity 1) f) =
    comp f (tensorLeftUnitor a) := by
  apply ext
  apply CPMMap.ext
  ext ai bj
  rcases ai with <x, i>
  rcases bj with <y, j>
  rw [show tensorLeftUnitor a' =
    ofEquivalence (tensorLeftUnitorEquiv a') from rfl,
    choi_comp_ofEquivalence_left]
  rw [show tensorLeftUnitor a =
    ofEquivalence (tensorLeftUnitorEquiv a) from rfl,
    choi_comp_ofEquivalence_right]
  simp only [cp_tensor, CPMMap.choi_tensor, Matrix.reindex_apply,
    Matrix.submatrix_apply, Matrix.kroneckerMap_apply]
  dsimp [CPMap.choiTensorEquiv, tensorLeftUnitorEquiv, identity,
    CPMMap.identity, KrausFamily.identity, KrausFamily.choi,
    KrausFamily.choiTerm]
  have hi : finOneEquiv.symm PUnit.unit = i.divNat :=
    Subsingleton.elim _ _

```

```

have hj : finOneEquiv.symm PUnit.unit = j.divNat :=
  Subsingleton.elim _ _
have hij : i.divNat = j.divNat := Subsingleton.elim _ _
simp [KrausFamily.choiTerm, hi, hij]

```

#### 4.4.1402 Naturality of the tensor right unitor

**Statement.** For natural numbers  $a, a'$ , a superoperator  $f$ : the composite of the tensor right unitor of  $a'$  after the tensor product of  $f$  and  $\text{identity } 1$  equals the composite of  $f$  after the tensor right unitor of  $a$ .

**Proof.** By case analysis on  $ai$ . The key step rewrites with the Choi matrix of a composite of the map induced by an index equivalence for superoperators, in the left argument, the Choi matrix of a composite of the map induced by an index equivalence for superoperators, in the right argument, the underlying completely positive map of a tensor product for superoperators and the Choi matrix of a tensor product for completely positive maps.

**Lean 4 source** `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```

theorem tensorRightUnitor_naturality {a a' : Nat}
  (f : Superoperator a a') :
  comp (tensorRightUnitor a') (tensor f (identity 1)) =
    comp f (tensorRightUnitor a) := by
  apply ext
  apply CPMMap.ext
  ext ai bj
  rcases ai with <x, i>
  rcases bj with <y, j>
  rw [show tensorRightUnitor a' =
    ofEquivalence (tensorRightUnitorEquiv a') from rfl,
    choi_comp_ofEquivalence_left]
  rw [show tensorRightUnitor a =
    ofEquivalence (tensorRightUnitorEquiv a) from rfl,
    choi_comp_ofEquivalence_right]
  simp only [cp_tensor, CPMMap.choi_tensor, Matrix.reindex_apply,
    Matrix.submatrix_apply, Matrix.kroneckerMap_apply]
  dsimp [CPMap.choiTensorEquiv, tensorRightUnitorEquiv, identity,
    CPMMap.identity, KrausFamily.identity, KrausFamily.choi,
    KrausFamily.choiTerm]
  have hi : finOneEquiv.symm PUnit.unit = i.modNat :=
    Subsingleton.elim _ _
  have hj : finOneEquiv.symm PUnit.unit = j.modNat :=
    Subsingleton.elim _ _
  have hij : i.modNat = j.modNat := Subsingleton.elim _ _
  simp [KrausFamily.choiTerm, hi, hij]

```

#### 4.4.1403 Naturality of the tensor swap

**Statement.** For natural numbers  $a, a', b, b'$ , superoperators  $f, g$ : the composite of the tensor swap of  $a'$  and  $b'$  after the tensor product of  $f$  and  $g$  equals the composite of the tensor product of  $g$  and  $f$  after the tensor swap of  $a$  and  $b$ .

**Proof.** By case analysis on  $ai$ . The key step rewrites with the Choi matrix of a composite of the map induced by an index equivalence for superoperators, in the left argument, the Choi matrix of a composite of the

map induced by an index equivalence for superoperators, in the right argument, the underlying completely positive map of a tensor product for superoperators and the Choi matrix of a tensor product for completely positive maps. The remaining identity is a polynomial identity in a commutative ring.

#### Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
theorem tensorSwap_naturality {a a' b b' : Nat}
  (f : Superoperator a a') (g : Superoperator b b') :
  comp (tensorSwap a' b') (tensor f g) =
    comp (tensor g f) (tensorSwap a b) := by
  apply ext
  apply CPMMap.ext
  ext ai bj
  rcases ai with <x, i>
  rcases bj with <y, j>
  rw [show tensorSwap a' b' =
    ofEquivalence (tensorSwapEquiv a' b') from rfl,
    choi_comp_ofEquivalence_left]
  rw [show tensorSwap a b =
    ofEquivalence (tensorSwapEquiv a b) from rfl,
    choi_comp_ofEquivalence_right]
  simp only [cp_tensor, CPMMap.choi_tensor, Matrix.reindex_apply,
    Matrix.submatrix_apply, Matrix.kroneckerMap_apply]
  dsimp [CPMap.choiTensorEquiv, tensorSwapEquiv]
  simp
  ring
```

#### 4.4.1404 Naturality of the inverse tensor associator

**Statement.** For natural numbers  $a, a', b, b', c, c'$ , superoperators  $f, g$ : if  $\text{Superoperator } c \ c'$ , then the composite of the tensor product of  $\text{tensor } f \ g$  and  $h$  after the inverse tensor associator of  $a, b, c$  equals the composite of the inverse tensor associator of  $a', b', c'$  after the tensor product of  $f$  and  $\text{tensor } g \ h$ .

**Proof.** By case analysis on  $ai$ . The key step rewrites with the Choi matrix of a composite of the map induced by an index equivalence for superoperators, in the right argument, the Choi matrix of a composite of the map induced by an index equivalence for superoperators, in the left argument, the underlying completely positive map of a tensor product for superoperators and the Choi matrix of a tensor product for completely positive maps. The remaining identity is a polynomial identity in a commutative ring.

#### Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```
theorem tensorAssociatorInv_naturality
  {a a' b b' c c' : Nat}
  (f : Superoperator a a') (g : Superoperator b b')
  (h : Superoperator c c') :
  comp (tensor (tensor f g) h) (tensorAssociatorInv a b c) =
    comp (tensorAssociatorInv a' b' c')
      (tensor f (tensor g h)) := by
  apply ext
  apply CPMMap.ext
  ext ai bj
  rcases ai with <x, i>
  rcases bj with <y, j>
```

```

rw [show tensorAssociatorInv a b c =
  ofEquivalence (tensorAssociatorEquiv a b c).symm from rfl,
  choi_comp_ofEquivalence_right]
rw [show tensorAssociatorInv a' b' c' =
  ofEquivalence (tensorAssociatorEquiv a' b' c').symm from rfl,
  choi_comp_ofEquivalence_left]
simp only [cp_tensor, CMap.choi_tensor, Matrix.reindex_apply,
  Matrix.submatrix_apply, Matrix.kroneckerMap_apply]
dsimp [CMap.choiTensorEquiv, tensorAssociatorEquiv]
simp
ring

```

#### 4.4.1405 Naturality of the inverse tensor left unitor

**Statement.** For natural numbers  $a, a'$ , a superoperator  $f$ : the composite of the tensor product of identity 1 and  $f$  after the inverse tensor left unitor of  $a$  equals the composite of the inverse tensor left unitor of  $a'$  after  $f$ .

**Proof.** By case analysis on  $a$ . The key step rewrites with the Choi matrix of a composite of the map induced by an index equivalence for superoperators, in the right argument, the Choi matrix of a composite of the map induced by an index equivalence for superoperators, in the left argument, the underlying completely positive map of a tensor product for superoperators and the Choi matrix of a tensor product for completely positive maps.

#### Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstances.lean`

```

theorem tensorLeftUnitorInv_naturality {a a' : Nat}
  (f : Superoperator a a') :
  comp (tensor (identity 1) f) (tensorLeftUnitorInv a) =
    comp (tensorLeftUnitorInv a') f := by
  apply ext
  apply CMap.ext
  ext ai bj
  rcases ai with <x, i>
  rcases bj with <y, j>
  rw [show tensorLeftUnitorInv a =
    ofEquivalence (tensorLeftUnitorEquiv a).symm from rfl,
    choi_comp_ofEquivalence_right]
  rw [show tensorLeftUnitorInv a' =
    ofEquivalence (tensorLeftUnitorEquiv a').symm from rfl,
    choi_comp_ofEquivalence_left]
  simp only [cp_tensor, CMap.choi_tensor, Matrix.reindex_apply,
    Matrix.submatrix_apply, Matrix.kroneckerMap_apply]
  dsimp [CMap.choiTensorEquiv, tensorLeftUnitorEquiv, identity,
    CMap.identity, KrausFamily.identity, KrausFamily.choi,
    KrausFamily.choiTerm]
  have hxy : x.divNat = y.divNat := Subsingleton.elim _ _
  have hone : y.divNat = finOneEquiv.symm PUnit.unit :=
    Subsingleton.elim _ _
  simp [KrausFamily.choiTerm, hxy, hone]

```

#### 4.4.1406 Naturality of the inverse tensor right unitor

**Statement.** For natural numbers  $a, a'$ , a superoperator  $f$ : the composite of the tensor product of  $f$  and  $\text{identity } 1$  after the inverse tensor right unitor of  $a$  equals the composite of the inverse tensor right unitor of  $a'$  after  $f$ .

**Proof.** By case analysis on  $a$ . The key step rewrites with the Choi matrix of a composite of the map induced by an index equivalence for superoperators, in the right argument, the Choi matrix of a composite of the map induced by an index equivalence for superoperators, in the left argument, the underlying completely positive map of a tensor product for superoperators and the Choi matrix of a tensor product for completely positive maps.

**Lean 4 source** [QLambda/Domain/Presheaf/SuperoperatorInstances.lean](#)

```
theorem tensorRightUnitorInv_naturality {a a' : Nat}
  (f : Superoperator a a') :
  comp (tensor f (identity 1)) (tensorRightUnitorInv a) =
    comp (tensorRightUnitorInv a') f := by
  apply ext
  apply CPMMap.ext
  ext ai bj
  rcases ai with <x, i>
  rcases bj with <y, j>
  rw [show tensorRightUnitorInv a =
    ofEquivalence (tensorRightUnitorEquiv a).symm from rfl,
    choi_comp_ofEquivalence_right]
  rw [show tensorRightUnitorInv a' =
    ofEquivalence (tensorRightUnitorEquiv a').symm from rfl,
    choi_comp_ofEquivalence_left]
  simp only [cp_tensor, CPMMap.choi_tensor, Matrix.reindex_apply,
    Matrix.submatrix_apply, Matrix.kroneckerMap_apply]
  dsimp [CPMap.choiTensorEquiv, tensorRightUnitorEquiv, identity,
    CPMMap.identity, KrausFamily.identity, KrausFamily.choi,
    KrausFamily.choiTerm]
  have hxy : x.modNat = y.modNat := Subsingleton.elim _ _
  have hone : y.modNat = finOneEquiv.symm PUnit.unit :=
    Subsingleton.elim _ _
  simp [KrausFamily.choiTerm, hxy, hone]
```

#### 4.4.1407 Naturality of the tensor product of the triangle

**Statement.** For natural numbers  $u, a, b$ , a superoperator  $q$ : the composite of the tensor product of  $\text{identity } a$  and  $\text{comp (tensorLeftUnitor } b) (\text{tensor } q (\text{identity } b))$  after the tensor associator of  $a, u, b$  equals the tensor product of the composite of  $\text{tensorRightUnitor } a$  after  $\text{tensor (identity } a) q$  and the identity on dimension  $b$ .

**Proof.** The claim follows from a chain of equalities (or inequalities). The key step rewrites with the fact that composition for superoperators is associative, the fact that parallel composition is a bifunctor: it preserves sequential composition in both arguments, the naturality of the tensor associator and the tensor product of the triangle for superoperators.

**Lean 4 source** [QLambda/Domain/Presheaf/SuperoperatorInstances.lean](#)

```
theorem tensor_triangle_naturality {u : Nat}
```

```

(a b : Nat) (q : Superoperator u 1) :
comp
  (tensor (identity a)
    (comp (tensorLeftUnitor b)
      (tensor q (identity b))))
  (tensorAssociator a u b) =
  tensor
    (comp (tensorRightUnitor a)
      (tensor (identity a) q))
    (identity b) := by
calc
  comp
    (tensor (identity a)
      (comp (tensorLeftUnitor b)
        (tensor q (identity b))))
    (tensorAssociator a u b) =
  comp (tensor (identity a) (tensorLeftUnitor b))
    (comp (tensor (identity a)
      (tensor q (identity b)))
      (tensorAssociator a u b)) := by
    rw [comp_assoc, <- tensor_comp]
    simp
  _ = comp (tensor (identity a) (tensorLeftUnitor b))
    (comp (tensorAssociator a 1 b)
      (tensor (tensor (identity a) q) (identity b))) := by
    rw [ <- tensorAssociator_naturality]
  _ = comp
    (comp (tensor (identity a) (tensorLeftUnitor b))
      (tensorAssociator a 1 b))
    (tensor (tensor (identity a) q) (identity b)) := by
    rw [comp_assoc]
  _ = comp (tensor (tensorRightUnitor a) (identity b))
    (tensor (tensor (identity a) q) (identity b)) := by
    rw [tensor_triangle]
  _ = tensor
    (comp (tensorRightUnitor a)
      (tensor (identity a) q))
    (identity b) := by
    rw [ <- tensor_comp]
    simp

```

#### 4.4.1408 The zero-qubit allocation matrix is an isometry

**Statement.** For a natural number  $q$ : the product of  $(\text{CompletedCP.allocZeroMatrix } q)^\dagger$  and the zero-qubit allocation matrix of  $q$  equals 1.

**Proof.** Both sides are compared pointwise (by extensionality). Each component of the claim is established separately. The argument splits on the relevant condition. An equation between variables is used to substitute one for the other. The key step rewrites with the usual algebraic identities, the definition of the zero-qubit allocation matrix, standard identities for matrices and the fact that observational equality is symmetric.

**Lean 4 source** [QLambda/Domain/Presheaf/SuperoperatorInstances.lean](#)



```

theorem allocZeroMatrix_isometry (q : Nat) :
  (CompletedCP.allocZeroMatrix q)? * CompletedCP.allocZeroMatrix q = 1 := by
  ext i j
  have hdim : CQ.QDim q <= CQ.QDim (q + 1) := by
    change 2 ^ q <= 2 ^ (q + 1)
    rw [pow_succ]
  omega
  have hi (k : Fin (CQ.QDim (q + 1))) :
    k.val = i.val <-> k = Fin.castLE hdim i := by
    constructor
    * intro h
      apply Fin.ext
      exact h
    * intro h
      exact congrArg Fin.val h
  have hj (k : Fin (CQ.QDim (q + 1))) :
    k.val = j.val <-> k = Fin.castLE hdim j := by
    constructor
    * intro h
      apply Fin.ext
      exact h
    * intro h
      exact congrArg Fin.val h
  simp only [CompletedCP.allocZeroMatrix, Matrix.mul_apply,
    Matrix.conjTranspose_apply]
  simp_rw [hi, hj]
  by_cases hij : i = j
  * subst j
    simp
  * simp [hij, Ne.symm hij]

```

#### 4.4.1409 Allocate one fresh qubit in state $|0\rangle$

**Definition.** Allocate one fresh qubit in state  $|0\rangle$ .

**Construction.** Defined to be the map induced by the isometry the allocation zero matrix isometry property of  $q$ .

**Lean 4 source** [QLambda/Domain/Presheaf/SuperoperatorInstances.lean](#)

```

noncomputable def allocateZero (q : Nat) :
  Superoperator (CQ.QDim q) (CQ.QDim (q + 1)) :=
  ofIsometry (CompletedCP.allocZeroMatrix q) (allocZeroMatrix_isometry q)

```

#### 4.4.1410 Underlying completely positive map of the allocation of a fresh zero qubit for superoperators

**Statement.** For a natural number  $q$ :  $(\text{allocateZero } q).cp$  equals the CP map with Kraus family  $[\text{CompletedCP.allocZeroMatrix } q]$ .

**Proof.** By definition: the left-hand side,  $(\text{allocateZero } q).cp$ , and the right-hand side, the CP map with Kraus family  $[\text{CompletedCP.allocZeroMatrix } q]$ , unfold to the same term.

**Lean 4 source** [QLambda/Domain/Presheaf/SuperoperatorInstances.lean](#)

```

theorem cp_allocateZero (q : Nat) :
  (allocateZero q).cp =
    CPMMap.ofKraus [CompletedCP.allocZeroMatrix q] :=
  rfl

```

#### 4.4.1411 Definition of the superoperator of the Pauli-X gate

**Definition.** The Pauli-X gate of  $w$  is a superoperator from  $\mathcal{QDim}\ q$  to  $\mathcal{QDim}\ q$ .

**Construction.** Defined to be the unitarity of the Pauli-X matrix of  $w$  and the  $x$  matrix isometry property of  $w$ .

**Lean 4 source** [QLambda/Domain/Presheaf/SuperoperatorInstances.lean](#)

```

noncomputable def x {q : Nat} (w : Fin q) :
  Superoperator (CQ.QDim q) (CQ.QDim q) :=
  unitary (Composer.xMatrix w) (Composer.xMatrix_isometry w)

```

#### 4.4.1412 Definition of the superoperator of the Hadamard gate

**Definition.** The Hadamard gate of  $w$  is a superoperator from  $\mathcal{QDim}\ q$  to  $\mathcal{QDim}\ q$ .

**Construction.** Defined to be the unitarity of the Hadamard matrix of  $w$  and the  $h$  matrix isometry property of  $w$ .

**Lean 4 source** [QLambda/Domain/Presheaf/SuperoperatorInstances.lean](#)

```

noncomputable def h {q : Nat} (w : Fin q) :
  Superoperator (CQ.QDim q) (CQ.QDim q) :=
  unitary (Composer.hMatrix w) (Composer.hMatrix_isometry w)

```

#### 4.4.1413 Definition of the superoperator of the T gate

**Definition.** The T gate of  $w$  is a superoperator from  $\mathcal{QDim}\ q$  to  $\mathcal{QDim}\ q$ .

**Construction.** Defined to be the unitarity of the T-gate matrix of  $w$  and the  $t$  matrix isometry property of  $w$ .

**Lean 4 source** [QLambda/Domain/Presheaf/SuperoperatorInstances.lean](#)

```

noncomputable def t {q : Nat} (w : Fin q) :
  Superoperator (CQ.QDim q) (CQ.QDim q) :=
  unitary (Composer.tMatrix w) (Composer.tMatrix_isometry w)

```

#### 4.4.1414 Definition of the superoperator of the Y-rotation gate

**Definition.** The Y-rotation gate of  $\theta$  and  $w$  is a superoperator from  $\mathcal{QDim}\ q$  to  $\mathcal{QDim}\ q$ .

**Construction.** Defined to be the unitarity of the Y-rotation matrix of  $\theta$  and  $w$  and the Y-rotation matrix isometry property of  $\theta$  and  $w$ .

**Lean 4 source** [QLambda/Domain/Presheaf/SuperoperatorInstances.lean](#)

```

noncomputable def ry {q : Nat} (? : ?) (w : Fin q) :
  Superoperator (CQ.QDim q) (CQ.QDim q) :=
  unitary (Composer.ryMatrix ? w) (Composer.ryMatrix_isometry ? w)

```

#### 4.4.1415 Definition of the superoperator of the controlled-NOT gate

**Definition.** The controlled-NOT gate of control and target is a superoperator from  $\text{QDim } q$  to  $\text{QDim } q$ .

**Construction.** Defined to be the unitarity of the controlled-NOT matrix of control and target and the controlled-NOT matrix isometry property of control and target.

**Lean 4 source** [QLambda/Domain/Presheaf/SuperoperatorInstances.lean](#)

```

noncomputable def cx {q : Nat} (control target : Fin q) :
  Superoperator (CQ.QDim q) (CQ.QDim q) :=
  unitary (Composer.cxMatrix control target)
  (Composer.cxMatrix_isometry control target)

```

#### 4.4.1416 Reset a retained wire to $|0\rangle$ , agreeing definitionally with the existing two-Kraus operation

**Definition.** Reset a retained wire to  $|0\rangle$ , agreeing definitionally with the existing two-Kraus operation.

**Construction.** Defined to be the superoperator of a quantum operation of the reset of wire  $w$ .

**Lean 4 source** [QLambda/Domain/Presheaf/SuperoperatorInstances.lean](#)

```

noncomputable def reset {q : Nat} (w : Fin q) :
  Superoperator (CQ.QDim q) (CQ.QDim q) :=
  ofQuantumOperation (Composer.reset w)

```

#### 4.4.1417 Underlying completely positive map of the reset for superoperators

**Statement.** For a natural number  $q$ , an index  $w$ :  $(\text{reset } w).cp$  equals the CP map with Kraus family  $[\text{resetKraus } w \text{ false}, \text{resetKraus } w \text{ true}]$ .

**Proof.** By definition: the left-hand side,  $(\text{reset } w).cp$ , and the right-hand side, the CP map with Kraus family  $[\text{resetKraus } w \text{ false}, \text{resetKraus } w \text{ true}]$ , unfold to the same term.

**Lean 4 source** [QLambda/Domain/Presheaf/SuperoperatorInstances.lean](#)

```

theorem cp_reset {q : Nat} (w : Fin q) :
  (reset w).cp =
    CPMMap.ofKraus [Composer.resetKraus w false, Composer.resetKraus w true] :=
  rfl

```

#### 4.4.1418 A finite retained-output instrument

**Definition.** A finite retained-output instrument. Branches are intrinsic CP maps; the total outcome weight is trace-nonincreasing.

**Construction.** An element consists of `branch` and `trace_nonincreasing`.

#### Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstrument.lean`

```
structure Instrument (n m outcomes : Nat) where
  branch : Fin outcomes -> CMap n m
  trace_nonincreasing :
    forall ? : Matrix (Fin n) (Fin n) ?, ? .PosSemidef ->
      (? i, (Matrix.trace ((branch i).applyMat ?)).re) <=
        (Matrix.trace ?).re
```

#### 4.4.1419 Convert an existing finite Kraus instrument without changing any branch meaning

**Definition.** Convert an existing finite Kraus instrument without changing any branch meaning.

**Construction.** Constructed by supplying each component: trace nonincreasing. The accompanying laws are verified from the definitions.

#### Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstrument.lean`

```
def ofQuantumInstrument (? : QuantumInstrument n m outcomes) :
  Instrument n m outcomes where
  branch i := CMap.ofKraus (? .branch i)
  trace_nonincreasing := by
    intro ? h?
    simpa using ? .trace_nonincreasing ? h?
```

#### 4.4.1420 Branch of the instrument of a quantum instrument

**Statement.** For an index  $i$ :  $(\text{ofQuantumInstrument } \Phi) . \text{branch } i$  equals the CP map with Kraus family  $\Phi . \text{branch } i$ .

**Proof.** By definition: the left-hand side,  $(\text{ofQuantumInstrument } \Phi) . \text{branch } i$ , and the right-hand side, the CP map with Kraus family  $\Phi . \text{branch } i$ , unfold to the same term.

#### Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstrument.lean`

```
theorem branch_ofQuantumInstrument (? : QuantumInstrument n m outcomes)
  (i : Fin outcomes) :
  (ofQuantumInstrument ?) .branch i = CMap.ofKraus (? .branch i) :=
  rfl
```

#### 4.4.1421 Nonnegativity of the trace of the real part

**Statement.** For a completely positive map  $\Phi$ , a matrix  $\rho$ : if  $\rho$  is positive semidefinite, then  $0 \leq (\text{tr } (\Phi . \text{applyMat } \rho)) . \text{re}$ .

**Proof.** The claim follows directly from the definitions of the objects involved.

#### Lean 4 source `QLambda/Domain/Presheaf/SuperoperatorInstrument.lean`

```
private theorem trace_re_nonneg (? : CMap n m)
  (? : Matrix (Fin n) (Fin n) ?) (h? : ? .PosSemidef) :
  0 <= (Matrix.trace (? .applyMat ?)).re := by
  have h :=
```

```
PosSemidef.trace_nonneg (CMap.applyMat_posSemidef ? h?)
exact (RCLike.nonneg_iff (K := ?).mp h).1
```

#### 4.4.1422 Every branch of a finite TNI instrument is itself a superoperator

**Definition.** Every branch of a finite TNI instrument is itself a superoperator.

**Construction.** Constructed by supplying each component: underlying completely positive map and trace nonincreasing. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/Presheaf/SuperoperatorInstrument.lean](#)

```
noncomputable def branchSuperoperator (? : Instrument n m outcomes)
  (i : Fin outcomes) : Superoperator n m where
  cp := ?.branch i
  trace_nonincreasing := by
    intro ? h?
    calc
      (Matrix.trace ((?.branch i).applyMat ?)).re
      <= ? j, (Matrix.trace ((?.branch j).applyMat ?)).re := by
        exact Finset.single_le_sum
          (fun j _ => trace_re_nonneg (?.branch j) ? h?)
          (Finset.mem_univ i)
      _ <= (Matrix.trace ?).re := ?.trace_nonincreasing ? h?
```

#### 4.4.1423 Computational-basis measurement retaining the quantum register

**Definition.** Computational-basis measurement retaining the quantum register.

**Construction.** Defined to be the instrument of a quantum instrument of the measurement of wire  $w$ .

**Lean 4 source** [QLambda/Domain/Presheaf/SuperoperatorInstrument.lean](#)

```
noncomputable def measure {q : Nat} (w : Fin q) :
  Instrument (CQ.QDim q) (CQ.QDim q) 2 :=
  ofQuantumInstrument (Composer.measure w)
```

#### 4.4.1424 Measurement of the branch of zero for quantum instruments

**Statement.** For a natural number  $q$ , an index  $w$ :  $(\text{measure } w).branch\ 0$  equals the CP map with Kraus family  $[\text{projector } w\ \text{false}]$ .

**Proof.** By definition: the left-hand side,  $(\text{measure } w).branch\ 0$ , and the right-hand side, the CP map with Kraus family  $[\text{projector } w\ \text{false}]$ , unfold to the same term.

**Lean 4 source** [QLambda/Domain/Presheaf/SuperoperatorInstrument.lean](#)

```
theorem measure_branch_zero {q : Nat} (w : Fin q) :
  (measure w).branch 0 =
  CMap.ofKraus [Composer.projector w false] :=
  rfl
```

#### 4.4.1425 Measurement of the branch of one for quantum instruments

**Statement.** For a natural number  $q$ , an index  $w$ :  $(\text{measure } w).branch\ 1$  equals the CP map with Kraus family  $[\text{projector } w\ \text{true}]$ .

**Proof.** By definition: the left-hand side,  $(\text{measure } w).branch\ 1$ , and the right-hand side, the CP map with Kraus family  $[\text{projector } w\ \text{true}]$ , unfold to the same term.

**Lean 4 source** [QLambda/Domain/Presheaf/SuperoperatorInstrument.lean](#)

```
theorem measure_branch_one {q : Nat} (w : Fin q) :  
  (measure w).branch 1 =  
    CPMMap.ofKraus [Composer.projector w true] :=  
  rfl
```

#### 4.4.1426 The structure of a symmetric tensor

**Definition.** Elements of the symmetric power are exactly the superoperators invariant under every finite permutation of the output tensor factors.

**Construction.** An element consists of `val` and `invariant`.

**Lean 4 source** [QLambda/Domain/Presheaf/SymmetricElement.lean](#)

```
structure SymmetricElement (A k n : Nat) where  
  val : Superoperator n (tensorPowerDimension A k)  
  invariant :  
    forall sigma : Equiv.Perm (Fin k),  
      Superoperator.comp (factorPermutation A k sigma) val = val
```

#### 4.4.1427 Extensionality for symmetric tensors

**Statement.** For natural numbers  $A, k, n$ : if  $x.val = y.val$ , then  $x = y$ .

**Proof.** By case analysis on  $x$ .

**Lean 4 source** [QLambda/Domain/Presheaf/SymmetricElement.lean](#)

```
theorem ext {A k n : Nat} {x y : SymmetricElement A k n}  
  (h : x.val = y.val) : x = y := by  
  cases x  
  cases y  
  cases h  
  rfl
```

#### 4.4.1428 Averaging any homogeneous coefficient produces a symmetric element

**Definition.** Averaging any homogeneous coefficient produces a symmetric element.

**Construction.** Constructed by supplying each component: `val` and `invariant`. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/Presheaf/SymmetricElement.lean](#)

```

noncomputable def ofAverage {A k n : Nat}
  (x : Superoperator n (tensorPowerDimension A k)) :
  SymmetricElement A k n where
val := Superoperator.comp (symmetricAverage A k) x
invariant := by
  intro sigma
  rw [Superoperator.comp_assoc,
    factorPermutation_comp_symmetricAverage]

```

#### 4.4.1429 The average fixes every permutation-invariant coefficient

**Statement.** The average fixes every permutation-invariant coefficient. Formally: `Superoperator.comp (symmetricAverage A k) x.val = x.val`.

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the underlying completely positive map of a composite for superoperators, the action on a matrix of a composition, the symmetric average of the action on a matrix and the extensionality for superoperators.

#### Lean 4 source `QLambda/Domain/Presheaf/SymmetricElement.lean`

```

theorem average_val {A k n : Nat} (x : SymmetricElement A k n) :
  Superoperator.comp (symmetricAverage A k) x.val = x.val := by
  apply Superoperator.ext
  apply CMap.ext_apply
  intro ?
  rw [Superoperator.cp_comp, CMap.applyMat_comp,
    symmetricAverage_applyMat]
  have hterm : forall sigma : Equiv.Perm (Fin k),
    (factorPermutation A k sigma).cp.applyMat (x.val.cp.applyMat ?) =
      x.val.cp.applyMat ? := by
    intro sigma
    rw [ <- CMap.applyMat_comp]
    exact congrArg (fun ? : Superoperator _ => ?.cp.applyMat ?)
      (x.invariant sigma)
  simp_rw [hterm]
  exact factorial_average_constant k _ _

```

#### 4.4.1430 A coefficient is fixed by averaging exactly when it is invariant under all tensor-factor permutations

**Statement.** A coefficient is fixed by averaging exactly when it is invariant under all tensor-factor permutations.

**Proof.** Each component of the claim is established separately. The key step rewrites with the fact that composition for superoperators is associative, the averaging lands in the fixed points of every tensor permutation and the average fixes every permutation-invariant coefficient.

#### Lean 4 source `QLambda/Domain/Presheaf/SymmetricElement.lean`

```

theorem average_fixed_iff {A k n : Nat}
  (x : Superoperator n (tensorPowerDimension A k)) :
  Superoperator.comp (symmetricAverage A k) x = x <->
    forall sigma : Equiv.Perm (Fin k),

```

```

      Superoperator.comp (factorPermutation A k sigma) x = x := by
constructor
* intro havg sigma
  rw [ <- havg, Superoperator.comp_assoc,
      factorPermutation_comp_symmetricAverage, havg]
* intro hinv
  exact average_val { val := x, invariant := hinv }

```

#### 4.4.1431 A symmetric element is unchanged when a homogeneous split is followed by the genuine tensor-factor braiding

**Statement.** A symmetric element is unchanged when a homogeneous split is followed by the genuine tensor-factor braiding.

**Proof.** The key step rewrites with the fact that composition for superoperators is associative, the map induced by an index equivalence of a composite for superoperators and the fact that regrouping and then braiding is the block permutation followed by regrouping in the opposite order.

#### Lean 4 source `QLambda/Domain/Presheaf/SymmetricElement.lean`

```

theorem split_braiding {A p q n : Nat}
  (x : SymmetricElement A (p + q) n) :
  Superoperator.comp
    (Superoperator.ofEquivalence (homogeneousBraidingEquiv A p q))
    (Superoperator.comp
      (Superoperator.ofEquivalence (tensorSplitEquiv A p q)) x.val) =
  Superoperator.comp
    (Superoperator.ofEquivalence
      (oppositeTensorSplitEquiv A p q)) x.val := by
  rw [Superoperator.comp_assoc, Superoperator.ofEquivalence_comp,
      tensorSplitEquiv_braiding]
  change
  Superoperator.comp
    (Superoperator.ofEquivalence
      ((factorPermutationEquiv A (p + q) (blockPermutation p q)).trans
        (oppositeTensorSplitEquiv A p q))) x.val =
  _
  rw [ <- Superoperator.ofEquivalence_comp,
      <- Superoperator.comp_assoc]
  change
  Superoperator.comp
    (Superoperator.ofEquivalence (oppositeTensorSplitEquiv A p q))
    (Superoperator.comp
      (factorPermutation A (p + q) (blockPermutation p q)) x.val) =
  _
  rw [x.invariant]

```

#### 4.4.1432 Val degree transport along an equality for symmetric tensors

**Statement.** Transporting a symmetric element's degree is implemented on its underlying superoperator by the corresponding finite-basis cast channel.



**Proof.** An equation between variables is used to substitute one for the other. The goal is closed by simplification with the defining equations.

#### Lean 4 source `QLambda/Domain/Presheaf/SymmetricElement.lean`

```
theorem val_degreeCast {A n a b : Nat} (h : a = b)
  (x : SymmetricElement A a n) :
  Superoperator.comp
    (Superoperator.ofEquivalence
      (finCongr (congrArg (tensorPowerDimension A) h))) x.val =
    (h |> x).val := by
  subst b
  simp
```

#### 4.4.1433 Dependent evaluation of a family of symmetric coefficients commutes with transport of the degree

**Statement.** Dependent evaluation of a family of symmetric coefficients commutes with transport of the degree. Formally:  $h \triangleright x \ a = x \ b$ .

**Proof.** An equation between variables is used to substitute one for the other.

#### Lean 4 source `QLambda/Domain/Presheaf/SymmetricElement.lean`

```
theorem family_degreeCast {A n a b : Nat}
  (x : forall k, SymmetricElement A k n) (h : a = b) :
  h |> x a = x b := by
  subst b
  rfl
```

#### 4.4.1434 Degree-zero contraction followed by the left unitor is the original coefficient

**Statement.** Degree-zero contraction followed by the left unitor is the original coefficient.

**Proof.** The claim follows from a chain of equalities (or inequalities). The key step rewrites with the fact that composition for superoperators is associative, the map induced by an index equivalence of a composite for superoperators, standard identities for equivalences and the definition of the homogeneous left unitor equivalence.

#### Lean 4 source `QLambda/Domain/Presheaf/SymmetricElement.lean`

```
theorem left_counit {A n q : Nat}
  (x : forall k, SymmetricElement A k n) :
  Superoperator.comp
    (Superoperator.ofEquivalence (homogeneousLeftUnitorEquiv A q))
    (Superoperator.comp
      (Superoperator.ofEquivalence (tensorSplitEquiv A 0 q))
      (x (0 + q)).val) =
    (x q).val := by
  rw [Superoperator.comp_assoc, Superoperator.ofEquivalence_comp]
  have he :
    (tensorSplitEquiv A 0 q).trans
      (homogeneousLeftUnitorEquiv A q) =
      finCongr
```

```

      (congrArg (tensorPowerDimension A) (Nat.zero_add q)) := by
    unfold homogeneousLeftUnitorEquiv
    rw [ <- Equiv.trans_assoc, Equiv.self_trans_symm,
      Equiv.refl_trans]
  rw [he]
  calc
    Superoperator.comp
      (Superoperator.ofEquivalence
        (finCongr
          (congrArg (tensorPowerDimension A) (Nat.zero_add q))))
      (x (0 + q)).val =
      ((Nat.zero_add q) |> x (0 + q)).val :=
    val_degreeCast (Nat.zero_add q) (x (0 + q))
  _ = (x q).val :=
    congrArg SymmetricElement.val
      (family_degreeCast x (Nat.zero_add q))

```

#### 4.4.1435 Degree-zero contraction followed by the right unitor is the original coefficient

**Statement.** Degree-zero contraction followed by the right unitor is the original coefficient.

**Proof.** The claim follows from a chain of equalities (or inequalities). The key step rewrites with the fact that composition for superoperators is associative, the map induced by an index equivalence of a composite for superoperators, standard identities for equivalences and the definition of the homogeneous right unitor equivalence.

#### Lean 4 source `QLambda/Domain/Presheaf/SymmetricElement.lean`

```

theorem right_counit {A n p : Nat}
  (x : forall k, SymmetricElement A k n) :
  Superoperator.comp
    (Superoperator.ofEquivalence (homogeneousRightUnitorEquiv A p))
    (Superoperator.comp
      (Superoperator.ofEquivalence (tensorSplitEquiv A p 0))
      (x (p + 0)).val) =
  (x p).val := by
  rw [Superoperator.comp_assoc, Superoperator.ofEquivalence_comp]
  have he :
    (tensorSplitEquiv A p 0).trans
      (homogeneousRightUnitorEquiv A p) =
    finCongr
      (congrArg (tensorPowerDimension A) (Nat.add_zero p)) := by
  unfold homogeneousRightUnitorEquiv
  rw [ <- Equiv.trans_assoc, Equiv.self_trans_symm,
    Equiv.refl_trans]
  rw [he]
  calc
    Superoperator.comp
      (Superoperator.ofEquivalence
        (finCongr
          (congrArg (tensorPowerDimension A) (Nat.add_zero p))))
      (x (p + 0)).val =
      ((Nat.add_zero p) |> x (p + 0)).val :=
    val_degreeCast (Nat.add_zero p) (x (p + 0))
  _ = (x p).val :=

```

```

congrArg SymmetricElement.val
(family_degreeCast x (Nat.add_zero p))

```

#### 4.4.1436 The two coefficientwise iterates of contraction agree after the canonical associativity transport

**Statement.** The two coefficientwise iterates of contraction agree after the canonical associativity transport.

**Proof.** The claim follows from a chain of equalities (or inequalities). The key step rewrites with the fact that composition for superoperators is associative, the map induced by an index equivalence of a composite for superoperators and standard identities for equivalences.

#### Lean 4 source `QLambda/Domain/Presheaf/SymmetricElement.lean`

```

theorem contraction_coassociative {A n p q r : Nat}
  (x : forall k, SymmetricElement A k n) :
  Superoperator.comp
    (Superoperator.ofEquivalence
      (contractionLeftRefinementEquiv A p q r))
    (Superoperator.comp
      (Superoperator.ofEquivalence
        (tensorSplitEquiv A (p + q) r))
      (x ((p + q) + r)).val) =
  Superoperator.comp
    (Superoperator.ofEquivalence
      (contractionRightRefinementEquiv A p q r))
    (Superoperator.comp
      (Superoperator.ofEquivalence
        (tensorSplitEquiv A p (q + r)))
      (x (p + (q + r))).val) := by
  rw [Superoperator.comp_assoc, Superoperator.ofEquivalence_comp]
  have hleft :
    (tensorSplitEquiv A (p + q) r).trans
      (contractionLeftRefinementEquiv A p q r) =
      tensorTripleSplitEquiv A p q r := by
    unfold contractionLeftRefinementEquiv
    rw [ <- Equiv.trans_assoc, Equiv.self_trans_symm,
      Equiv.refl_trans]
  rw [hleft]
  rw [Superoperator.comp_assoc, Superoperator.ofEquivalence_comp]
  have hright :
    (tensorSplitEquiv A p (q + r)).trans
      (contractionRightRefinementEquiv A p q r) =
      (finCongr (congrArg (tensorPowerDimension A)
        (Nat.add_assoc p q r).symm)).trans
        (tensorTripleSplitEquiv A p q r) := by
    unfold contractionRightRefinementEquiv
    rw [ <- Equiv.trans_assoc, Equiv.self_trans_symm,
      Equiv.refl_trans]
  rw [hright, <- Superoperator.ofEquivalence_comp,
    <- Superoperator.comp_assoc]
  apply congrArg (fun z =>
    Superoperator.comp
      (Superoperator.ofEquivalence
        (tensorTripleSplitEquiv A p q r)) z)

```

```

let h : p + (q + r) = (p + q) + r :=
  (Nat.add_assoc p q r).symm
calc
  (x ((p + q) + r)).val =
    (h |> x (p + (q + r))).val :=
      (congrArg SymmetricElement.val
        (family_degreeCast x h)).symm
_ = Superoperator.comp
  (Superoperator.ofEquivalence
    (finCongr (congrArg (tensorPowerDimension A) h)))
  (x (p + (q + r))).val :=
    (val_degreeCast h (x (p + (q + r)))).symm

```

#### 4.4.1437 Pointwise application of a basis equivalence preserves symmetric invariants

**Definition.** Pointwise application of a basis equivalence preserves symmetric invariants.

**Construction.** Constructed by supplying each component: val and invariant. The accompanying laws are verified from the definitions.

**Lean 4 source** `QLambda/Domain/Presheaf/SymmetricElement.lean`

```

noncomputable def mapEquivalence {A B k n : Nat}
  (e : Fin A → Fin B) (x : SymmetricElement A k n) :
  SymmetricElement B k n where
val := Superoperator.comp
  (Superoperator.ofEquivalence (tensorTupleMapEquiv e k)) x.val
invariant := by
  intro sigma
  rw [Superoperator.comp_assoc]
  change
    Superoperator.comp
      (Superoperator.comp
        (Superoperator.ofEquivalence
          (factorPermutationEquiv B k sigma))
        (Superoperator.ofEquivalence (tensorTupleMapEquiv e k)))
      x.val =
  _
  rw [Superoperator.ofEquivalence_comp,
    tensorTupleMapEquiv_permutation]
  rw [← Superoperator.ofEquivalence_comp,
    ← Superoperator.comp_assoc]
  change
    Superoperator.comp
      (Superoperator.ofEquivalence (tensorTupleMapEquiv e k))
      (Superoperator.comp (factorPermutation A k sigma) x.val) =
  _
  rw [x.invariant]

```

#### 4.4.1438 Underlying value of the zero

**Statement.** For natural numbers A, k, n: the val of 0 equals 0.

**Proof.** By definition: the left-hand side, the val of 0, and the right-hand side, 0, unfold to the same term.

#### Lean 4 source `QLambda/Domain/Presheaf/SymmetricElementInstances.lean`

```
theorem zero_val (A k n : Nat) :  
  (0 : SymmetricElement A k n).val = 0 :=  
  rfl
```

#### 4.4.1439 Concrete comonoid morphisms supported by the present tensor construction

**Definition.** Concrete comonoid morphisms supported by the present tensor construction. The sole datum is a finite basis equivalence; all comonoid laws are theorems about its promoted map, not assumptions stored in fields.

**Construction.** An element consists of equivalence.

#### Lean 4 source `QLambda/Domain/Presheaf/SymmetricEquivalenceComonoidHom.lean`

```
structure SymmetricEquivalenceComonoidHom (A B : Nat) where  
  equivalence : Fin A → Fin B
```

#### 4.4.1440 Extensionality for symmetric-equivalence comonoid morphisms

**Statement.** For natural numbers A, B: if  $f.\text{equivalence} = g.\text{equivalence}$ , then  $f = g$ .

**Proof.** By case analysis on  $f$ .

#### Lean 4 source `QLambda/Domain/Presheaf/SymmetricEquivalenceComonoidHom.lean`

```
theorem ext {A B : Nat}  
  {f g : SymmetricEquivalenceComonoidHom A B}  
  (h : f.equivalence = g.equivalence) : f = g := by  
  cases f  
  cases g  
  cases h  
  rfl
```

#### 4.4.1441 Underlying promoted module map

**Definition.** Underlying promoted module map.

**Construction.** Defined to be the symmetric equivalence promotion of the equivalence of  $f$ .

#### Lean 4 source `QLambda/Domain/Presheaf/SymmetricEquivalenceComonoidHom.lean`

```
noncomputable def hom {A B : Nat}  
  (f : SymmetricEquivalenceComonoidHom A B) :  
  Hom (symmetricFormalPowerSeries A)  
    (symmetricFormalPowerSeries B) :=  
  symmetricEquivalencePromotion f.equivalence
```

#### 4.4.1442 Induced map on tensor squares

**Definition.** Induced map on tensor squares.

**Construction.** Defined to be the symmetric tensor product square equivalence functorial action of the equivalence of  $\mathbb{f}$ .

**Lean 4 source** [QLambda/Domain/Presheaf/SymmetricEquivalenceComonoidHom.lean](#)

```
noncomputable def tensorHom {A B : Nat}
  (f : SymmetricEquivalenceComonoidHom A B) :
  Hom (symmetricFormalTensorSquare A)
    (symmetricFormalTensorSquare B) :=
  symmetricTensorSquareEquivalenceMap f.equivalence
```

#### 4.4.1443 The symmetric-equivalence comonoid morphism preserves the contraction

**Statement.** For natural numbers A, B: the composite of the symmetric contraction of B after the morphism of  $\mathbb{f}$  equals the composite of the tensor product morphism of  $\mathbb{f}$  after the symmetric contraction of A.

**Proof.** This is an instance of the fact that promotion induced by a basis equivalence preserves contraction.

**Lean 4 source** [QLambda/Domain/Presheaf/SymmetricEquivalenceComonoidHom.lean](#)

```
theorem preserves_contraction {A B : Nat}
  (f : SymmetricEquivalenceComonoidHom A B) :
  Hom.comp (symmetricContraction B) f.hom =
  Hom.comp f.tensorHom (symmetricContraction A) :=
  symmetricContraction_promotion f.equivalence
```

#### 4.4.1444 The symmetric-equivalence comonoid morphism preserves the weakening

**Statement.** For natural numbers A, B: the composite of the symmetric weakening of B after the morphism of  $\mathbb{f}$  equals the symmetric weakening of A.

**Proof.** This is an instance of the fact that promotion induced by a basis equivalence preserves weakening.

**Lean 4 source** [QLambda/Domain/Presheaf/SymmetricEquivalenceComonoidHom.lean](#)

```
theorem preserves_weakening {A B : Nat}
  (f : SymmetricEquivalenceComonoidHom A B) :
  Hom.comp (symmetricWeakening B) f.hom =
  symmetricWeakening A :=
  symmetricWeakening_promotion f.equivalence
```

#### 4.4.1445 Dereliction of the morphism

**Statement.** For natural numbers A, B: the composite of the symmetric dereliction of B after the morphism of  $\mathbb{f}$  equals an explicit expression in the composition, the Yoneda image, the map induced by an index equivalence and the symmetric promotion linear part.

**Proof.** This is an instance of the fact that dereliction after promotion is exactly the induced linear basis map.

## Lean 4 source `QLambda/Domain/Presheaf/SymmetricEquivalenceComonoidHom.lean`

```
theorem dereliction_hom {A B : Nat}
  (f : SymmetricEquivalenceComonoidHom A B) :
  Hom.comp (symmetricDereliction B) f.hom =
  Hom.comp
    (yonedaMap
      (Superoperator.ofEquivalence
        (symmetricPromotionLinearPart f.equivalence)))
    (symmetricDereliction A) :=
  symmetricDereliction_promotion f.equivalence
```

### 4.4.1446 The inherited partial countable sums on a symmetric-power fiber

**Definition.** The inherited partial countable sums on a symmetric-power fiber.

**Construction.** Constructed by supplying each component: carrier, zero, summation, uniqueness, empty, singleton, remove zero and reindexing, among others. The accompanying laws are verified from the definitions.

## Lean 4 source `QLambda/Domain/Presheaf/SymmetricPower.lean`

```
noncomputable def symmetricPowerFiber (A k n : Nat) : Fiber where
  Carrier := SymmetricElement A k n
  zero := 0
  summation :=
  { HasSum := fun f x =>
    SigmaMon.ChoiSum.HasSum (fun i => (f i).val) x.val
  unique := by
    intro ? _ f x y hx hy
    apply SymmetricElement.ext
    exact SigmaMon.ChoiSum.unique hx hy
  empty := by
    convert (SigmaMon.ChoiSum.empty :
      SigmaMon.ChoiSum.HasSum
        (fun i : Empty => nomatch i)
        (0 : Superoperator n (tensorPowerDimension A k))) using 1
  singleton := fun x => SigmaMon.ChoiSum.singleton x.val
  remove_zero := by
    intro ? _ f s x hzero
    exact SigmaMon.ChoiSum.remove_zero
      (fun i => (f i).val) s x.val
      (fun i hi => congrArg SymmetricElement.val (hzero i hi))
  reindex := by
    intro ? ? _ _ e f x
    exact SigmaMon.ChoiSum.reindex e (fun i => (f i).val) x.val
  flatten := by
    classical
    intro ? _ ? _ f x
    constructor
    * intro hflat
      rcases
        (SigmaMon.superoperatorPartialCountableSum.flatten
          (fun i j => (f i j).val) x.val).mp hflat with
      <g, hrows, hsum>
```

```

let G : ? -> SymmetricElement A k n := fun i =>
{ val := g i
  invariant := by
    intro sigma
    have hc := SigmaMon.ChoiSum.comp_left
      (factorPermutation A k sigma) (hrows i)
    have hc' : SigmaMon.ChoiSum.HasSum
      (fun j => (f i j).val)
      (Superoperator.comp
        (factorPermutation A k sigma) (g i)) := by
      convert hc using 1
    funext j
    exact ((f i j).invariant sigma).symm
    exact SigmaMon.ChoiSum.unique hc' (hrows i) }
exact <G, fun i => hrows i, hsum>
* rintro <g, hrows, hsum>
exact
  (SigmaMon.superoperatorPartialCountableSum.flatten
    (fun i j => (f i j).val) x.val).mpr
  <fun i => (g i).val, hrows, hsum> }

```

#### 4.4.1447 The invariant submodule representing the $k$ th symmetric tensor power

**Definition.** The invariant submodule representing the  $k$ th symmetric tensor power.

**Construction.** Constructed by supplying each component: act, invariant, act zero element, act zero functorial action, act identity, act composite, act sum element and act sum functorial action, among others. The accompanying laws are verified from the definitions.

#### Lean 4 source `QLambda/Domain/Presheaf/SymmetricPower.lean`

```

noncomputable def symmetricPower (A k : Nat) : Module where
  obj n := symmetricPowerFiber A k n
  act := fun x f =>
    { val := Superoperator.comp x.val f
      invariant := by
        intro sigma
        rw [Superoperator.comp_assoc, x.invariant] }
  act_zero_element := by
    intro m n f
    apply SymmetricElement.ext
    exact Superoperator.comp_zero_left f
  act_zero_map := by
    intro m n x
    apply SymmetricElement.ext
    exact Superoperator.comp_zero_right x.val
  act_id := by
    intro n x
    apply SymmetricElement.ext
    exact Superoperator.comp_identity x.val
  act_comp := by
    intro ? m n x f g
    apply SymmetricElement.ext
    exact (Superoperator.comp_assoc x.val f g).symm
  act_sum_element := by

```



```

intro ? _ m n x s f h
exact SigmaMon.ChoiSum.comp_right f h
act_sum_map := by
  intro ? _ m n x f s h
  exact SigmaMon.ChoiSum.comp_left x.val h
act_sum_from_one := by
  intro ? _ m x s f h
  obtain <?, h?> := SigmaMon.ChoiSum.comp_from_one f
  (show SigmaMon.ChoiSum.HasSum (fun i => (x i).val) s.val from h)
  refine <<?, ?_>, h?>
  intro sigma
  have hsymm (j : ?) :
    Superoperator.comp (factorPermutation A k sigma)
      (Superoperator.comp (x j).val (f j)) =
      Superoperator.comp (x j).val (f j) := by
    let xj : SymmetricElement A k 1 := x j
    have hinvariant :=
      congrArg (fun ? => Superoperator.comp ? (f j))
        (xj.invariant sigma)
    exact (Superoperator.comp_assoc _ _ _).trans hinvariant
  have hL :=
    SigmaMon.ChoiSum.comp_left (factorPermutation A k sigma) h?
  have hfam :
    (fun j =>
      Superoperator.comp (factorPermutation A k sigma)
        (Superoperator.comp (x j).val (f j))) =
      fun j => Superoperator.comp (x j).val (f j) :=
    funext hsymm
  have hL' :
    SigmaMon.ChoiSum.HasSum
      (fun j => Superoperator.comp (x j).val (f j))
      (Superoperator.comp (factorPermutation A k sigma) ?) := by
    convert hL using 1
    exact hfam.symm
  exact SigmaMon.ChoiSum.unique hL' h?
act_sum_tensor_from_one := by
  intro ? _ m B x s f h
  obtain <?, h?> :=
    (representable (tensorPowerDimension A k)).act_sum_tensor_from_one f
  (show SigmaMon.ChoiSum.HasSum (fun i => (x i).val) s.val from h)
  refine <<?, ?_>, h?>
  intro sigma
  have hsymm (j : ?) :
    Superoperator.comp (factorPermutation A k sigma)
      (Superoperator.comp (x j).val
        (Superoperator.tensor (f j)
          (Superoperator.identity B))) =
      Superoperator.comp (x j).val
        (Superoperator.tensor (f j)
          (Superoperator.identity B)) := by
    let xj : SymmetricElement A k (1 * B) := x j
    have hinvariant :=
      congrArg
        (fun ? =>
          Superoperator.comp ?
            (Superoperator.tensor (f j)
              (Superoperator.identity B)))

```

```

        (Superoperator.identity B)))
    (xj.invariant sigma)
    exact (Superoperator.comp_assoc _ _ _).trans hinvariant
have hL :=
  SigmaMon.ChoiSum.comp_left (factorPermutation A k sigma) h?
have hfam :
  (fun j =>
    Superoperator.comp (factorPermutation A k sigma)
      (Superoperator.comp (x j).val
        (Superoperator.tensor (f j)
          (Superoperator.identity B)))) =
  fun j =>
    Superoperator.comp (x j).val
      (Superoperator.tensor (f j)
        (Superoperator.identity B)) :=
  funext hsymm
have hL' :
  SigmaMon.ChoiSum.HasSum
  (fun j =>
    Superoperator.comp (x j).val
      (Superoperator.tensor (f j)
        (Superoperator.identity B)))
    (Superoperator.comp (factorPermutation A k sigma) ?) := by
  convert hL using 1
  exact hfam.symm
exact SigmaMon.ChoiSum.unique hL' h?

```

#### 4.4.1448 The averaging projection from the full tensor power onto its symmetric fixed-point submodule

**Definition.** The averaging projection from the full tensor power onto its symmetric fixed-point submodule.

**Construction.** Constructed by supplying each component: application, functorial action zero, functorial action sum and naturality. The accompanying laws are verified from the definitions.

#### Lean 4 source `QLambda/Domain/Presheaf/SymmetricPower.lean`

```

noncomputable def symmetricPowerProjection (A k : Nat) :
  Hom (representable (tensorPowerDimension A k))
    (symmetricPower A k) where
app := fun _ x => SymmetricElement.ofAverage x
map_zero := by
  intro n
  apply SymmetricElement.ext
  exact Superoperator.comp_zero_right _
map_sum := by
  intro ? _ n f x h
  exact SigmaMon.ChoiSum.comp_left (symmetricAverage A k) h
naturality := by
  intro m n x f
  apply SymmetricElement.ext
  exact Superoperator.comp_assoc _ _ _

```

#### 4.4.1449 Forget the invariant proof and include a symmetric power into the full representable tensor power

**Definition.** Forget the invariant proof and include a symmetric power into the full representable tensor power.

**Construction.** Constructed by supplying each component: application, functorial action zero, functorial action sum and naturality. The accompanying laws are verified from the definitions.

**Lean 4 source** `QLambda/Domain/Presheaf/SymmetricPower.lean`

```
def symmetricPowerInclusion (A k : Nat) :  
  Hom (symmetricPower A k)  
    (representable (tensorPowerDimension A k)) where  
  app := fun _ x => x.val  
  map_zero := fun _ => rfl  
  map_sum := fun h => h  
  naturality := fun _ _ => rfl
```

#### 4.4.1450 Symmetric power projection of the inclusion

**Statement.** For natural numbers  $A, k$ : the composite of the symmetric power projection of  $A$  and  $k$  after the symmetric power inclusion of  $A$  and  $k$  equals the identity of the symmetric power of  $A$  and  $k$ .

**Proof.** Both sides are compared pointwise (by extensionality). It follows from the extensionality for symmetric tensors and the average fixes every permutation-invariant coefficient.

**Lean 4 source** `QLambda/Domain/Presheaf/SymmetricPower.lean`

```
theorem symmetricPowerProjection_inclusion (A k : Nat) :  
  Hom.comp (symmetricPowerProjection A k)  
    (symmetricPowerInclusion A k) =  
  Hom.id (symmetricPower A k) := by  
  ext n x  
  apply SymmetricElement.ext  
  exact SymmetricElement.average_val x
```

#### 4.4.1451 Symmetric power inclusion of the projection

**Statement.** For natural numbers  $A, k$ : the composite of the symmetric power inclusion of  $A$  and  $k$  after the symmetric power projection of  $A$  and  $k$  equals the Yoneda image of the symmetric average of  $A$  and  $k$ .

**Proof.** Both sides are compared pointwise (by extensionality).

**Lean 4 source** `QLambda/Domain/Presheaf/SymmetricPower.lean`

```
theorem symmetricPowerInclusion_projection (A k : Nat) :  
  Hom.comp (symmetricPowerInclusion A k)  
    (symmetricPowerProjection A k) =  
  yonedaMap (symmetricAverage A k) := by  
  ext n x  
  rfl
```

#### 4.4.1452 Definition of the extend from symmetric power

**Definition.** Extend a map defined on the symmetric power to the full representable tensor coefficient by precomposing with the concrete averaging projector.

**Construction.** Defined to be the composite of  $f$  after the symmetric power projection of  $B$  and  $k$ .

**Lean 4 source** `QLambda/Domain/Presheaf/SymmetricPower.lean`

```
noncomputable def extendFromSymmetricPower {A B k : Nat}
  (f : Hom (symmetricPower B k) (representable A)) :
  Hom (representable (tensorPowerDimension B k)) (representable A) :=
  Hom.comp f (symmetricPowerProjection B k)
```

#### 4.4.1453 Extend from symmetric power of the inclusion

**Statement.** For natural numbers  $A, B, k$ , a module morphism  $f$ : the composite of the extend from symmetric power of  $f$  after the symmetric power inclusion of  $B$  and  $k$  equals  $f$ .

**Proof.** The key step rewrites with the definition of the extend from symmetric power, the fact that composition for module morphisms is associative, the symmetric power projection of the inclusion and the fact that the identity is a right unit for composition for module morphisms.

**Lean 4 source** `QLambda/Domain/Presheaf/SymmetricPower.lean`

```
theorem extendFromSymmetricPower_inclusion {A B k : Nat}
  (f : Hom (symmetricPower B k) (representable A)) :
  Hom.comp (extendFromSymmetricPower f)
    (symmetricPowerInclusion B k) = f := by
  rw [extendFromSymmetricPower, <- Hom.comp_assoc,
    symmetricPowerProjection_inclusion, Hom.comp_id]
```

#### 4.4.1454 A finite basis equivalence acts naturally on every symmetric power

**Definition.** A finite basis equivalence acts naturally on every symmetric power.

**Construction.** Constructed by supplying each component: application, functorial action zero, functorial action sum and naturality. The accompanying laws are verified from the definitions.

**Lean 4 source** `QLambda/Domain/Presheaf/SymmetricPower.lean`

```
noncomputable def symmetricPowerEquivalenceMap {A B : Nat}
  (e : Fin A → Fin B) (k : Nat) :
  Hom (symmetricPower A k) (symmetricPower B k) where
  app := fun _ x => SymmetricElement.mapEquivalence e x
  map_zero := by
    intro n
    apply SymmetricElement.ext
    exact Superoperator.comp_zero_right _
  map_sum := by
    intro ? _ n f x h
    exact SigmaMon.ChoiSum.comp_left
      (Superoperator.ofEquivalence (tensorTupleMapEquiv e k)) h
  naturality := by
    intro m n x f
```

```

apply SymmetricElement.ext
exact Superoperator.comp_assoc _ _ _

```

#### 4.4.1455 The symmetric power equivalence functorial action preserves identities

**Statement.** For natural numbers  $A, k$ : the symmetric power equivalence functorial action of the reflexivity of  $\text{Fin } A$  and  $k$  equals the identity of the symmetric power of  $A$  and  $k$ .

**Proof.** Both sides are compared pointwise (by extensionality). The goal is simplified using the definition of the symmetric power equivalence functorial action, the definition of the functorial action equivalence and the extensionality for symmetric tensors.

**Lean 4 source** [QLambda/Domain/Presheaf/SymmetricPower.lean](#)

```

theorem symmetricPowerEquivalenceMap_refl (A k : Nat) :
  symmetricPowerEquivalenceMap (Equiv.refl (Fin A)) k =
    Hom.id (symmetricPower A k) := by
  ext n x
  apply SymmetricElement.ext
  simp [symmetricPowerEquivalenceMap, SymmetricElement.mapEquivalence]

```

#### 4.4.1456 The symmetric power equivalence functorial action preserves composition

**Statement.** For natural numbers  $A, B, C, k$ , indexes  $e, f$ : the symmetric power equivalence functorial action of the transitivity of  $f$  and  $k$  equals the composite of the symmetric power equivalence functorial action of  $f$  and  $k$  after the symmetric power equivalence functorial action of  $e$  and  $k$ .

**Proof.** Both sides are compared pointwise (by extensionality). The goal is simplified using the definition of the symmetric power equivalence functorial action, the definition of the functorial action equivalence, the fact that composition for superoperators is associative and the extensionality for symmetric tensors.

**Lean 4 source** [QLambda/Domain/Presheaf/SymmetricPower.lean](#)

```

theorem symmetricPowerEquivalenceMap_trans {A B C : Nat}
  (e : Fin A → Fin B) (f : Fin B → Fin C) (k : Nat) :
  symmetricPowerEquivalenceMap (e.trans f) k =
    Hom.comp (symmetricPowerEquivalenceMap f k)
      (symmetricPowerEquivalenceMap e k) := by
  ext n x
  apply SymmetricElement.ext
  simp [symmetricPowerEquivalenceMap, SymmetricElement.mapEquivalence,
    Superoperator.comp_assoc]

```

#### 4.4.1457 Strictly associated tensor-power dimensions

**Definition.** Strictly associated tensor-power dimensions.

**Construction.** Defined by cases on the input:  $0 \mapsto 1$ ;  $k + 1 \mapsto$  the product of  $A$  and the dimension of a tensor power of  $A$  and  $k$ .

**Lean 4 source** [QLambda/Domain/Presheaf/SymmetricPowerCore.lean](#)

```
def tensorPowerDimension (A : Nat) : Nat -> Nat
| 0 => 1
| k + 1 => A * tensorPowerDimension A k
```

#### 4.4.1458 Dimension of a tensor power of zero

**Statement.** For a natural number  $A$ : the dimension of a tensor power of  $A$  at 0 equals 1.

**Proof.** By definition. Unfolding the dimension of a tensor power turns the left-hand side, the dimension of a tensor power of  $A$  at 0, into the right-hand side, 1; the two sides are the same term.

**Lean 4 source** [QLambda/Domain/Presheaf/SymmetricPowerCore.lean](#)

```
theorem tensorPowerDimension_zero (A : Nat) :
  tensorPowerDimension A 0 = 1 :=
  rfl
```

#### 4.4.1459 Dimension of a tensor power of the successor

**Statement.** For natural numbers  $A, k$ : the dimension of a tensor power of  $A$  and the sum of  $k$  and 1 equals the product of  $A$  and the dimension of a tensor power of  $A$  and  $k$ .

**Proof.** By definition. Unfolding the dimension of a tensor power turns the left-hand side, the dimension of a tensor power of  $A$  and the sum of  $k$  and 1, into the right-hand side, the product of  $A$  and the dimension of a tensor power of  $A$  and  $k$ ; the two sides are the same term.

**Lean 4 source** [QLambda/Domain/Presheaf/SymmetricPowerCore.lean](#)

```
theorem tensorPowerDimension_succ (A k : Nat) :
  tensorPowerDimension A (k + 1) =
  A * tensorPowerDimension A k :=
  rfl
```

#### 4.4.1460 Dimension of a tensor power of one

**Statement.** For a natural number  $A$ : the dimension of a tensor power of  $A$  at 1 equals  $A$ .

**Proof.** The goal is simplified using the definition of the dimension of a tensor power.

**Lean 4 source** [QLambda/Domain/Presheaf/SymmetricPowerCore.lean](#)

```
theorem tensorPowerDimension_one (A : Nat) :
  tensorPowerDimension A 1 = A := by
  simp [tensorPowerDimension]
```

#### 4.4.1461 The dimension of a tensor power equals a power

**Statement.** For natural numbers  $A, k$ : the dimension of a tensor power of  $A$  and  $k$  equals  $A^k$ .

**Proof.** By induction on the natural number  $k$ . The case of zero is immediate; for a successor, the claim follows from the induction hypothesis. The goal is simplified using the definition of the dimension of a tensor power, the usual algebraic identities and commutativity of multiplication.

#### Lean 4 source `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```
theorem tensorPowerDimension_eq_pow (A k : Nat) :
  tensorPowerDimension A k = A ^ k := by
  induction k with
  | zero => rfl
  | succ k ih =>
    simp [tensorPowerDimension, pow_succ, ih, Nat.mul_comm]
```

#### 4.4.1462 Partitions of a fixed total degree have one common tensor-power dimension

**Statement.** Partitions of a fixed total degree have one common tensor-power dimension. This makes a mixed partition sum well-typed. It does not make that sum trace-nonincreasing. Formally:  $\text{tensorPowerDimension } A \ p * \text{tensorPowerDimension } A \ q = \text{tensorPowerDimension } A \ (p + q)$ .

**Proof.** The goal is simplified using the fact that the dimension of a tensor power equals a power and the usual algebraic identities.

#### Lean 4 source `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```
theorem tensorPowerDimension_mul_add (A p q : Nat) :
  tensorPowerDimension A p * tensorPowerDimension A q =
  tensorPowerDimension A (p + q) := by
  simp [tensorPowerDimension_eq_pow, pow_add]
```

#### 4.4.1463 Split a nonempty finite tuple into its head and tail

**Definition.** Split a nonempty finite tuple into its head and tail.

**Construction.** Constructed by supplying each component of the structure explicitly.

#### Lean 4 source `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```
def finSuccFunctionEquiv (A k : Nat) :
  (Fin (k + 1) -> Fin A) ? Fin A x (Fin k -> Fin A) where
  toFun f := (f 0, fun i => f i.succ)
  invFun p := Fin.cases p.1 p.2
  left_inv f := by
    funext i
    refine Fin.cases ?_ (fun j => ?_) i <;> rfl
  right_inv p := by
    apply Prod.ext
    * rfl
    * funext i
      rfl
```

#### 4.4.1464 A finite tuple is canonically a basis index for the corresponding strictly associated tensor power

**Definition.** A finite tuple is canonically a basis index for the corresponding strictly associated tensor power.

**Construction.** Defined by cases on the input:  $0 \mapsto \{ \text{toFun} := \text{fun } \_ \Rightarrow \langle 0, \text{by simp} \rangle; k + 1 \mapsto (\text{finSuccFunctionEquiv } A \ k).trans$ .

**Lean 4 source** `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```
noncomputable def tensorTupleEquiv (A : Nat) :
  (k : Nat) -> (Fin k -> Fin A) ? Fin (tensorPowerDimension A k)
| 0 =>
  { toFun := fun _ => <0, by simp>
    invFun := fun _ i => nomatch i
    left_inv := fun f => by
      funext i
      exact Fin.elim0 i
    right_inv := fun i => (Fin.eq_zero i).symm }
| k + 1 =>
  (finSuccFunctionEquiv A k).trans
  ((Equiv.prodCongr (Equiv.refl (Fin A))
    (tensorTupleEquiv A k)).trans finProdFinEquiv)
```

#### 4.4.1465 Permute the tensor factors of a tensor-power basis

**Definition.** Permute the tensor factors of a tensor-power basis.

**Construction.** Defined by an explicit formula built from the tensor product tuple equivalence, the function type congruence and the reflexivity.

**Lean 4 source** `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```
noncomputable def factorPermutationEquiv (A k : Nat)
  (sigma : Equiv.Perm (Fin k)) :
  Fin (tensorPowerDimension A k) ?
  Fin (tensorPowerDimension A k) :=
  (tensorTupleEquiv A k).symm |>.trans
  ((Equiv.arrowCongr sigma (Equiv.refl (Fin A))).trans
    (tensorTupleEquiv A k))
```

#### 4.4.1466 The reversible channel implementing a tensor-factor permutation

**Definition.** The reversible channel implementing a tensor-factor permutation.

**Construction.** Defined to be the map induced by an index equivalence of the factor permutation equivalence of  $A, k, \sigma$ .

**Lean 4 source** `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```
noncomputable def factorPermutation (A k : Nat)
  (sigma : Equiv.Perm (Fin k)) :
  Superoperator (tensorPowerDimension A k)
  (tensorPowerDimension A k) :=
  Superoperator.ofEquivalence (factorPermutationEquiv A k sigma)
```



#### 4.4.1467 Tensor-factor permutations form a representation of the finite permutation group

**Statement.** Tensor-factor permutations form a representation of the finite permutation group. Formally:  
$$(\text{factorPermutationEquiv } A \ k \ \sigma).trans \ (\text{factorPermutationEquiv } A \ k \ \tau) = \text{factorPermutationEquiv } A \ k \ (\sigma.trans \ \tau).$$

**Proof.** Both sides are compared pointwise (by extensionality). The goal is simplified using the definition of the factor permutation equivalence and the extensionality for bilinear maps.

**Lean 4 source** `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```
theorem factorPermutationEquiv_trans (A k : Nat)
  (sigma tau : Equiv.Perm (Fin k)) :
  (factorPermutationEquiv A k sigma).trans
    (factorPermutationEquiv A k tau) =
    factorPermutationEquiv A k (sigma.trans tau) := by
  apply Equiv.ext
  intro x
  simp [factorPermutationEquiv]
  funext i
  rfl
```

#### 4.4.1468 Transitivity of the factor permutation

**Statement.** For natural numbers  $A, k$ : the composite of the factor permutation of  $A, k, \tau$  after the factor permutation of  $A, k, \sigma$  equals the factor permutation of  $A, k, \sigma.trans \ \tau$ .

**Proof.** The key step rewrites with the definition of the factor permutation, the map induced by an index equivalence of a composite for superoperators and the tensor-factor permutations form a representation of the finite permutation group.

**Lean 4 source** `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```
theorem factorPermutation_trans (A k : Nat)
  (sigma tau : Equiv.Perm (Fin k)) :
  Superoperator.comp (factorPermutation A k tau)
    (factorPermutation A k sigma) =
    factorPermutation A k (sigma.trans tau) := by
  rw [factorPermutation, factorPermutation, factorPermutation,
    Superoperator.ofEquivalence_comp, factorPermutationEquiv_trans]
```

#### 4.4.1469 Kraus normalization for the uniform distribution on $k!$ permutations

**Definition.** Kraus normalization for the uniform distribution on  $k!$  permutations.

**Construction.** Defined to be the square root of the factorial of  $k^{-1}$ ,  $:\mathbb{R}$ .

**Lean 4 source** `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```
noncomputable def permutationAverageScale (k : Nat) : ? :=
  (Real.sqrt ((Nat.factorial k : ?)^-1) : ?)
```

#### 4.4.1470 Permutation average scale of the squared norm

**Statement.** For a natural number  $k$ : the product of the permutation average scale of  $k$  and the adjoint of `permutationAverageScale k` equals the factorial of  $k^{-1}$ .

**Proof.** The key step rewrites with standard identities for complex numbers, the usual algebraic identities and the definition of the permutation average scale.

**Lean 4 source** `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```
theorem permutationAverageScale_normSq (k : Nat) :
  permutationAverageScale k * star (permutationAverageScale k) =
    ((Nat.factorial k : ?)^-1 : ?) := by
  rw [show star (permutationAverageScale k) =
    permutationAverageScale k by
    simp [permutationAverageScale]]
  unfold permutationAverageScale
  rw [ <- Complex.ofReal_mul]
  norm_cast
  simp [pow_two] using
    Real.sq_sqrt (inv_nonneg.mpr (Nat.cast_nonneg (k.factorial)))
```

#### 4.4.1471 A Kraus presentation of the uniform average of all tensor-factor permutation channels

**Definition.** A Kraus presentation of the uniform average of all tensor-factor permutation channels.

**Construction.** Defined by an explicit formula built from the permutation average scale, the equivalence matrix and the factor permutation equivalence.

**Lean 4 source** `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```
noncomputable def symmetricAverageKraus (A k : Nat) :
  KrausFamily (tensorPowerDimension A k)
    (tensorPowerDimension A k) :=
  ((Finset.univ : Finset (Equiv.Perm (Fin k))).toList.map fun sigma =>
    permutationAverageScale k *
    Superoperator.equivalenceMatrix
      (factorPermutationEquiv A k sigma))
```

#### 4.4.1472 Symmetric average Kraus of the effect

**Statement.** For natural numbers  $A, k$ : the effect of the symmetric average Kraus of  $A$  and  $k$  equals 1.

**Proof.** Both sides are compared pointwise (by extensionality). The argument splits on the relevant condition. An equation between variables is used to substitute one for the other. The key step rewrites with standard identities for lists, standard identities for matrices, the fact that the equivalence matrix is an isometry and the usual algebraic identities.

**Lean 4 source** `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```
theorem symmetricAverageKraus_effect (A k : Nat) :
  KrausFamily.effect (symmetricAverageKraus A k) = 1 := by
  classical
  unfold KrausFamily.effect symmetricAverageKraus
```

```

simp only [List.map_map]
have hterm (sigma : Equiv.Perm (Fin k)) :
  (permutationAverageScale k *
    Superoperator.equivalenceMatrix
      (factorPermutationEquiv A k sigma)) *
  (permutationAverageScale k *
    Superoperator.equivalenceMatrix
      (factorPermutationEquiv A k sigma)) =
  ((Nat.factorial k : ?)^-1 : ?) * 1 := by
rw [Matrix.conjTranspose_smul, Matrix.smul_mul, Matrix.mul_smul,
  Superoperator.equivalenceMatrix_isometry]
rw [smul_smul]
congr 1
rw [mul_comm]
exact permutationAverageScale_normSq k
rw [show
  List.map
    ((fun A => A? * A) comp fun sigma =>
      permutationAverageScale k *
        Superoperator.equivalenceMatrix
          (factorPermutationEquiv A k sigma))
    (Finset.univ : Finset (Equiv.Perm (Fin k))).toList =
  List.map (fun _ => ((Nat.factorial k : ?)^-1 : ?) * 1)
    (Finset.univ : Finset (Equiv.Perm (Fin k))).toList by
  apply List.map_congr_left
  intro sigma _
  exact hterm sigma]
simp [Fintype.card_perm, nsmul_eq_mul]
ext i j
rw [Matrix.smul_apply, Matrix.one_apply, Matrix.natCast_apply]
by_cases hij : i = j
* subst j
  simp
  rw [inv_mul_cancel_0]
  exact_mod_cast Nat.factorial_ne_zero k
* simp [hij]

```

#### 4.4.1473 The trace-preserving CP projector obtained by uniformly averaging all tensor-factor permutation channels

**Definition.** The trace-preserving CP projector obtained by uniformly averaging all tensor-factor permutation channels.

**Construction.** Defined by an explicit formula built from the map determined by a Kraus family, the symmetric average Kraus, the introduction and the trace application matrix equality effect.

**Lean 4 source** [QLambda/Domain/Presheaf/SymmetricPowerCore.lean](#)

```

noncomputable def symmetricAverage (A k : Nat) :
  Superoperator (tensorPowerDimension A k)
  (tensorPowerDimension A k) :=
  Superoperator.ofKraus (symmetricAverageKraus A k) (by
    intro ? _
    rw [KrausFamily.trace_applyMat_eq_effect,
      symmetricAverageKraus_effect, Matrix.one_mul])

```

#### 4.4.1474 The list of a finite sum of the passage to list equals a finite sum

**Statement.**  $(s.toList.map f).sum = \sum x \in s, f x$ . Formally:  $(s.toList.map f).sum = \sum x \in s, f x$ .

**Proof.** The claim follows from a chain of equalities (or inequalities). The argument proceeds by induction. The goal is closed by simplification with the defining equations.

**Lean 4 source** `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```
private theorem list_sum_toList_eq_sum {a M : Type*}
  [DecidableEq a] [AddCommMonoid M] (s : Finset a) (f : a → M) :
  (s.toList.map f).sum = ? x in s, f x := by
  induction s using Finset.induction with
  | empty => simp
  | @insert a s ha ih =>
    calc
      ((insert a s).toList.map f).sum =
        ((a :: s.toList).map f).sum :=
          ((Finset.toList_insert ha).map f).sum_eq
        _ = f a + (s.toList.map f).sum := by simp
        _ = f a + ? x in s, f x := congrArg (f a + *) ih
        _ = ? x in insert a s, f x := by simp [ha]
```

#### 4.4.1475 Symmetric average of the action on a matrix

**Statement.** For natural numbers  $A, k$ , a matrix  $\rho$ :  $(\text{symmetricAverage } A \ k).cp.applyMat \ \rho$  equals  $\sum \sigma : \text{Equiv.Perm } (\text{Fin } k), (\text{factorPermutation } A \ k \ \sigma).cp.applyMat \ \rho$  scaled by the factorial of  $k^{-1}$ .

**Proof.** The key step rewrites with the action on a matrix of a map determined by a Kraus family, the definition of the action on a matrix, standard identities for lists and the fact that the list of a finite sum of the passage to list equals a finite sum.

**Lean 4 source** `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```
theorem symmetricAverage_applyMat (A k : Nat)
  (? : Matrix (Fin (tensorPowerDimension A k))
    (Fin (tensorPowerDimension A k)) ?) :
  (symmetricAverage A k).cp.applyMat ? =
    ((Nat.factorial k : ?)^-1 : ?) *
    ? sigma : Equiv.Perm (Fin k),
    (factorPermutation A k sigma).cp.applyMat ? := by
  classical
  unfold symmetricAverage Superoperator.ofKraus symmetricAverageKraus
  rw [CPMap.applyMat_ofKraus]
  simp only [KrausFamily.applyMat, List.map_map]
  change
    ((Finset.univ : Finset (Equiv.Perm (Fin k))).toList.map
      (fun sigma =>
        (permutationAverageScale k *
          Superoperator.equivalenceMatrix
            (factorPermutationEquiv A k sigma)) * ? *
        (permutationAverageScale k *
          Superoperator.equivalenceMatrix
```

```

      (factorPermutationEquiv A k sigma))?).sum =
    -
    rw [list_sum_toList_eq_sum]
    rw [Finset.smul_sum]
    apply Finset.sum_congr rfl
    intro sigma _
    simp only [factorPermutation,
      Superoperator.ofEquivalence, Superoperator.ofIsometry,
      Superoperator.ofQuantumOperation, QuantumOperation.ofIsometry,
      Superoperator.ofKraus, CPMat.applyMat_ofKraus,
      KrausFamily.applyMat, List.map_cons, List.map_nil,
      List.sum_cons, List.sum_nil, add_zero]
    rw [Matrix.conjTranspose_smul, Matrix.smul_mul,
      Matrix.mul_smul]
    rw [Matrix.smul_mul, smul_smul]
    congr 1
    rw [mul_comm]
    exact permutationAverageScale_normSq k

```

#### 4.4.1476 Completely positive map of the action on a matrix of a finite sum of a finite sum

**Statement.** For natural numbers  $n, m$ , a completely positive map  $\Phi$ :  $\Phi.\text{applyMat } (\sum i \in s, f i) = \sum i \in s, \Phi.\text{applyMat } (f i)$ .

**Proof.** The argument proceeds by induction. The goal is simplified using the action on a matrix of a sum for completely positive maps.

**Lean 4 source** [QLambda/Domain/Presheaf/SymmetricPowerCore.lean](#)

```

private theorem cpMap_applyMat_finset_sum {? : Type*}
  [DecidableEq ?] {n m : Nat} (? : CPMat n m) (s : Finset ?)
  (f : ? -> Matrix (Fin n) (Fin n) ?) :
  ?.applyMat (? i in s, f i) =
    ? i in s, ?.applyMat (f i) := by
  induction s using Finset.induction with
  | empty =>
    simp using ?.applyMat_smul (0 : ?)
    (0 : Matrix (Fin n) (Fin n) ?)
  | @insert a s ha ih =>
    simp [ha, CPMat.applyMat_add, ih]

```

#### 4.4.1477 Averaging lands in the fixed points of every tensor permutation

**Statement.** Averaging lands in the fixed points of every tensor permutation. Formally:  $\text{Superoperator.comp (factorPermutation A k } \tau) (\text{symmetricAverage A k}) = \text{symmetricAverage A k}$ .

**Proof.** Both sides are compared pointwise (by extensionality). Each component of the claim is established separately. The key step rewrites with the underlying completely positive map of a composite for superoperators, the action on a matrix of a composition, the symmetric average of the action on a matrix and the action on a matrix of a scalar multiple for completely positive maps.

**Lean 4 source** [QLambda/Domain/Presheaf/SymmetricPowerCore.lean](#)

```

theorem factorPermutation_comp_symmetricAverage (A k : Nat)
  (tau : Equiv.Perm (Fin k)) :
  Superoperator.comp (factorPermutation A k tau)
    (symmetricAverage A k) =
    symmetricAverage A k := by
  apply Superoperator.ext
  apply CMap.ext_apply
  intro ?
  rw [Superoperator.cp_comp, CMap.applyMat_comp,
    symmetricAverage_applyMat, CMap.applyMat_smul,
    cpMap_applyMat_finset_sum]
  congr 1
  apply Finset.sum_bij (fun sigma _ => sigma.trans tau)
  * intro sigma _
    simp
  * intro sigma_1 _ sigma_2 _ h
    apply Equiv.ext
    intro x
    apply tau.injective
    exact congrFun (congrArg Equiv.toFun h) x
  * intro ? _
    refine <?.trans tau.symm, by simp, ?_>
    apply Equiv.ext
    intro x
    simp
  * intro sigma _
    rw [← CMap.applyMat_comp]
    exact congrArg (fun ? : Superoperator _ _ => ?.cp.applyMat ?)
      (factorPermutation_trans A k sigma tau)

```

#### 4.4.1478 Factorial average of the constant

**Statement.** For natural numbers  $k, d$ , a matrix  $x$ :  $\text{Nat.factorial } k^{-1} \cdot \sum \_ \sigma : \text{Equiv.Perm } (\text{Fin } k), x = x$ .

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with standard identities for matrices, the usual algebraic identities, standard identities for finite types and associativity of multiplication.

#### Lean 4 source `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```

theorem factorial_average_constant (k d : Nat)
  (x : Matrix (Fin d) (Fin d) ?) :
  ((Nat.factorial k : ?)^-1 : ?) *
    ? _sigma : Equiv.Perm (Fin k), x = x := by
  ext i j
  rw [Matrix.smul_apply]
  rw [Matrix.sum_apply]
  rw [Algebra.smul_def]
  simp [Fintype.card_perm, nsmul_eq_mul]
  rw [← mul_assoc, inv_mul_cancel_0, one_mul]
  exact_mod_cast Nat.factorial_ne_zero k

```

#### 4.4.1479 The averaging channel is an idempotent CP/TNI projector

**Statement.** The averaging channel is an idempotent CP/TNI projector. Formally: `Superoperator.comp (symmetricAverage A k) (symmetricAverage A k) = symmetricAverage A k`.

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the underlying completely positive map of a composite for superoperators, the action on a matrix of a composition, the symmetric average of the action on a matrix and the extensionality for superoperators.

#### Lean 4 source `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```
theorem symmetricAverage_idempotent (A k : Nat) :
  Superoperator.comp (symmetricAverage A k)
    (symmetricAverage A k) =
    symmetricAverage A k := by
  apply Superoperator.ext
  apply CPMMap.ext_apply
  intro ?
  rw [Superoperator.cp_comp, CPMMap.applyMat_comp,
    symmetricAverage_applyMat]
  have hterm : forall sigma : Equiv.Perm (Fin k),
    (factorPermutation A k sigma).cp.applyMat
      ((symmetricAverage A k).cp.applyMat ?) =
      (symmetricAverage A k).cp.applyMat ? := by
    intro sigma
    rw [ <- CPMMap.applyMat_comp]
    exact congrArg (fun ? : Superoperator _ _ => ?.cp.applyMat ?)
      (factorPermutation_comp_symmetricAverage A k sigma)
  simp_rw [hterm]
  exact factorial_average_constant k _ _
```

#### 4.4.1480 Apply a finite basis equivalence pointwise to a tensor tuple

**Definition.** Apply a finite basis equivalence pointwise to a tensor tuple.

**Construction.** Defined by an explicit formula built from the tensor product tuple equivalence, the function type congruence and the reflexivity.

#### Lean 4 source `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```
noncomputable def tensorTupleMapEquiv {A B : Nat}
  (e : Fin A → Fin B) (k : Nat) :
  Fin (tensorPowerDimension A k) →
  Fin (tensorPowerDimension B k) :=
  (tensorTupleEquiv A k).symm |>.trans
    ((Equiv.arrowCongr (Equiv.refl (Fin k)) e).trans
      (tensorTupleEquiv B k))
```

#### 4.4.1481 Tensor product tuple functorial action equivalence of the permutation

**Statement.** For natural numbers  $A, B, k$ , an index  $e$ : `(tensorTupleMapEquiv e k).trans (factorPermutationEquiv B k  $\sigma$ )` equals `(factorPermutationEquiv A k  $\sigma$ ).trans (tensorTupleMapEquiv e k)`.

**Proof.** Both sides are compared pointwise (by extensionality). The goal is simplified using the definition of the tensor product tuple functorial action equivalence, the definition of the factor permutation equivalence, the extensionality for bilinear maps and the definition of the tensor product tuple equivalence.

**Lean 4 source** `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```
theorem tensorTupleMapEquiv_permutation {A B : Nat}
  (e : Fin A → Fin B) (k : Nat) (sigma : Equiv.Perm (Fin k)) :
  (tensorTupleMapEquiv e k).trans (factorPermutationEquiv B k sigma) =
    (factorPermutationEquiv A k sigma).trans
      (tensorTupleMapEquiv e k) := by
  apply Equiv.ext
  intro x
  apply (tensorTupleEquiv B k).symm.injective
  funext i
  simp [tensorTupleMapEquiv, factorPermutationEquiv]
```

#### 4.4.1482 Reflexivity of the tensor product tuple functorial action equivalence

**Statement.** For natural numbers  $A, k$ : the tensor product tuple functorial action equivalence of the reflexivity of  $\text{Fin } A$  and  $k$  equals the reflexivity of the finite index of  $\text{tensorPowerDimension } A \ k$ .

**Proof.** Both sides are compared pointwise (by extensionality). The goal is simplified using the definition of the tensor product tuple functorial action equivalence, the extensionality for bilinear maps and the definition of the tensor product tuple equivalence.

**Lean 4 source** `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```
theorem tensorTupleMapEquiv_refl (A k : Nat) :
  tensorTupleMapEquiv (Equiv.refl (Fin A)) k =
    Equiv.refl (Fin (tensorPowerDimension A k)) := by
  apply Equiv.ext
  intro x
  apply (tensorTupleEquiv A k).symm.injective
  funext i
  simp [tensorTupleMapEquiv]
```

#### 4.4.1483 Transitivity of the tensor product tuple functorial action equivalence

**Statement.** For natural numbers  $A, B, C, k$ , indexes  $e, f$ : the tensor product tuple functorial action equivalence of the transitivity of  $f$  and  $k$  equals  $(\text{tensorTupleMapEquiv } e \ k).trans (\text{tensorTupleMapEquiv } f \ k)$ .

**Proof.** Both sides are compared pointwise (by extensionality). The goal is simplified using the definition of the tensor product tuple functorial action equivalence, the extensionality for bilinear maps and the definition of the tensor product tuple equivalence.

**Lean 4 source** `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```
theorem tensorTupleMapEquiv_trans {A B C : Nat}
  (e : Fin A → Fin B) (f : Fin B → Fin C) (k : Nat) :
  tensorTupleMapEquiv (e.trans f) k =
    (tensorTupleMapEquiv e k).trans (tensorTupleMapEquiv f k) := by
```



```

apply Equiv.ext
intro x
apply (tensorTupleEquiv C k).symm.injective
funext i
simp [tensorTupleMapEquiv]

```

#### 4.4.1484 Regroup a $(p+q)$ -tuple into its first $p$ and last $q$ tensor coordinates

**Definition.** Regroup a  $(p+q)$ -tuple into its first  $p$  and last  $q$  tensor coordinates.

**Construction.** Defined by an explicit formula built from the tensor product tuple equivalence, the function type congruence, the finite index sum finite index equivalence and the reflexivity.

**Lean 4 source** `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```

noncomputable def tensorSplitEquiv (A p q : Nat) :
  Fin (tensorPowerDimension A (p + q)) ?
  Fin (tensorPowerDimension A p * tensorPowerDimension A q) :=
(tensorTupleEquiv A (p + q)).symm |>.trans
  (((Equiv.arrowCongr finSumFinEquiv (Equiv.refl (Fin A))).symm).trans
   ((Equiv.sumArrowEquivProdArrow (Fin p) (Fin q) (Fin A)).trans
    ((Equiv.prodCongr (tensorTupleEquiv A p)
      (tensorTupleEquiv A q)).trans finProdFinEquiv)))

```

#### 4.4.1485 Pointwise basis equivalence on a pair of homogeneous blocks

**Definition.** Pointwise basis equivalence on a pair of homogeneous blocks.

**Construction.** Defined by an explicit formula built from the tensor product split equivalence and the tensor product tuple functorial action equivalence.

**Lean 4 source** `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```

noncomputable def homogeneousPairMapEquiv {A B : Nat}
  (e : Fin A ? Fin B) (p q : Nat) :
  Fin (tensorPowerDimension A p * tensorPowerDimension A q) ?
  Fin (tensorPowerDimension B p * tensorPowerDimension B q) :=
(tensorSplitEquiv A p q).symm |>.trans
  ((tensorTupleMapEquiv e (p + q)).trans
   (tensorSplitEquiv B p q))

```

#### 4.4.1486 Naturality of the tensor product split equivalence

**Statement.** For natural numbers  $A, B, p, q$ , an index  $e$ :  $(\text{tensorSplitEquiv } A \ p \ q).trans$   $(\text{homogeneousPairMapEquiv } e \ p \ q)$  equals  $(\text{tensorTupleMapEquiv } e \ (p + q)).trans$   $(\text{tensorSplitEquiv } B \ p \ q)$ .

**Proof.** The key step rewrites with standard identities for equivalences and the definition of the homogeneous pair functorial action equivalence.

**Lean 4 source** `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```

theorem tensorSplitEquiv_natural {A B : Nat}
  (e : Fin A → Fin B) (p q : Nat) :
  (tensorSplitEquiv A p q).trans
    (homogeneousPairMapEquiv e p q) =
  (tensorTupleMapEquiv e (p + q)).trans
    (tensorSplitEquiv B p q) := by
  unfold homogeneousPairMapEquiv
  rw [← Equiv.trans_assoc, Equiv.self_trans_symm,
      Equiv.refl_trans]

```

#### 4.4.1487 Exchange two adjacent blocks of tensor-factor positions

**Definition.** Exchange two adjacent blocks of tensor-factor positions.

**Construction.** Defined by an explicit formula built from the symmetry, the sum commutativity, the transitivity and the finite index congruence.

**Lean 4 source** [QLambda/Domain/Presheaf/SymmetricPowerCore.lean](#)

```

noncomputable def blockPermutation (p q : Nat) :
  Equiv.Perm (Fin (p + q)) :=
  finSumFinEquiv.symm |>.trans
    ((Equiv.sumComm (Fin p) (Fin q)).trans
      (finSumFinEquiv.trans (finCongr (Nat.add_comm q p))))

```

#### 4.4.1488 The braiding between two homogeneous tensor powers

**Definition.** The braiding between two homogeneous tensor powers, defined by the genuine block permutation of tensor factors and the canonical splittings.

**Construction.** Defined by an explicit formula built from the tensor product split equivalence, the factor permutation equivalence, the block permutation and the finite index congruence.

**Lean 4 source** [QLambda/Domain/Presheaf/SymmetricPowerCore.lean](#)

```

noncomputable def homogeneousBraidingEquiv (A p q : Nat) :
  Fin (tensorPowerDimension A p * tensorPowerDimension A q) →
  Fin (tensorPowerDimension A q * tensorPowerDimension A p) :=
  (tensorSplitEquiv A p q).symm |>.trans
    ((factorPermutationEquiv A (p + q) (blockPermutation p q)).trans
      ((finCongr
        (congrArg (tensorPowerDimension A) (Nat.add_comm p q))).trans
        (tensorSplitEquiv A q p)))

```

#### 4.4.1489 The opposite-order split, with the source degree transported along $p + q = q + p$

**Definition.** The opposite-order split, with the source degree transported along  $p + q = q + p$ .

**Construction.** Defined by an explicit formula built from the finite index congruence, the congruence argument, the dimension of a tensor power and the addition commutativity.

**Lean 4 source** [QLambda/Domain/Presheaf/SymmetricPowerCore.lean](#)

```

noncomputable def oppositeTensorSplitEquiv (A p q : Nat) :
  Fin (tensorPowerDimension A (p + q)) ?
  Fin (tensorPowerDimension A q * tensorPowerDimension A p) :=
(finCongr
  (congrArg (tensorPowerDimension A) (Nat.add_comm p q))).trans
  (tensorSplitEquiv A q p)

```

#### 4.4.1490 The left tensor unitor on homogeneous dimensions

**Definition.** The left tensor unitor on homogeneous dimensions.

**Construction.** Defined by an explicit formula built from the tensor product split equivalence, the finite index congruence, the congruence argument and the dimension of a tensor power.

**Lean 4 source** [QLambda/Domain/Presheaf/SymmetricPowerCore.lean](#)

```

noncomputable def homogeneousLeftUnitorEquiv (A q : Nat) :
  Fin (tensorPowerDimension A 0 * tensorPowerDimension A q) ?
  Fin (tensorPowerDimension A q) :=
(tensorSplitEquiv A 0 q).symm |>.trans
(finCongr
  (congrArg (tensorPowerDimension A) (Nat.zero_add q)))

```

#### 4.4.1491 The right tensor unitor on homogeneous dimensions

**Definition.** The right tensor unitor on homogeneous dimensions.

**Construction.** Defined by an explicit formula built from the tensor product split equivalence, the finite index congruence, the congruence argument and the dimension of a tensor power.

**Lean 4 source** [QLambda/Domain/Presheaf/SymmetricPowerCore.lean](#)

```

noncomputable def homogeneousRightUnitorEquiv (A p : Nat) :
  Fin (tensorPowerDimension A p * tensorPowerDimension A 0) ?
  Fin (tensorPowerDimension A p) :=
(tensorSplitEquiv A p 0).symm |>.trans
(finCongr
  (congrArg (tensorPowerDimension A) (Nat.add_zero p)))

```

#### 4.4.1492 Split the first homogeneous block once more

**Definition.** Split the first homogeneous block once more.

**Construction.** Defined by an explicit formula built from the symmetry, the prod congruence, the tensor product split equivalence and the reflexivity.

**Lean 4 source** [QLambda/Domain/Presheaf/SymmetricPowerCore.lean](#)

```

noncomputable def homogeneousLeftRefinementEquiv (A p q r : Nat) :
  Fin (tensorPowerDimension A (p + q) * tensorPowerDimension A r) ?
  Fin ((tensorPowerDimension A p * tensorPowerDimension A q) *
    tensorPowerDimension A r) :=
finProdFinEquiv.symm |>.trans

```

```
((Equiv.prodCongr (tensorSplitEquiv A p q)
  (Equiv.refl (Fin (tensorPowerDimension A r))))).trans
  finProdFinEquiv)
```

#### 4.4.1493 Canonical three-block splitting of a symmetric tensor power

**Definition.** Canonical three-block splitting of a symmetric tensor power.

**Construction.** Defined by an explicit formula built from the tensor product split equivalence and the homogeneous left refinement equivalence.

**Lean 4 source** [QLambda/Domain/Presheaf/SymmetricPowerCore.lean](#)

```
noncomputable def tensorTripleSplitEquiv (A p q r : Nat) :
  Fin (tensorPowerDimension A ((p + q) + r)) ?
  Fin ((tensorPowerDimension A p * tensorPowerDimension A q) *
    tensorPowerDimension A r) :=
  (tensorSplitEquiv A (p + q) r).trans
  (homogeneousLeftRefinementEquiv A p q r)
```

#### 4.4.1494 Refinement of the left output of contraction

**Definition.** Refinement of the left output of contraction.

**Construction.** Defined by an explicit formula built from the tensor product split equivalence and the tensor product triple split equivalence.

**Lean 4 source** [QLambda/Domain/Presheaf/SymmetricPowerCore.lean](#)

```
noncomputable def contractionLeftRefinementEquiv (A p q r : Nat) :
  Fin (tensorPowerDimension A (p + q) * tensorPowerDimension A r) ?
  Fin ((tensorPowerDimension A p * tensorPowerDimension A q) *
    tensorPowerDimension A r) :=
  (tensorSplitEquiv A (p + q) r).symm |>.trans
  (tensorTripleSplitEquiv A p q r)
```

#### 4.4.1495 Refinement of the right output of contraction, including the canonical associativity transport of total degree

**Definition.** Refinement of the right output of contraction, including the canonical associativity transport of total degree.

**Construction.** Defined by an explicit formula built from the tensor product split equivalence, the finite index congruence, the congruence argument and the dimension of a tensor power.

**Lean 4 source** [QLambda/Domain/Presheaf/SymmetricPowerCore.lean](#)

```
noncomputable def contractionRightRefinementEquiv (A p q r : Nat) :
  Fin (tensorPowerDimension A p * tensorPowerDimension A (q + r)) ?
  Fin ((tensorPowerDimension A p * tensorPowerDimension A q) *
    tensorPowerDimension A r) :=
  (tensorSplitEquiv A p (q + r)).symm |>.trans
  ((finCongr (congrArg (tensorPowerDimension A)
```

```
(Nat.add_assoc p q r).symm)).trans
(tensorTripleSplitEquiv A p q r))
```

#### 4.4.1496 Regrouping and then braiding is the block permutation followed by regrouping in the opposite order

**Statement.** Regrouping and then braiding is the block permutation followed by regrouping in the opposite order.

**Proof.** Both sides are compared pointwise (by extensionality). The goal is simplified using the definition of the homogeneous braiding equivalence and the extensionality for bilinear maps.

**Lean 4 source** `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```
theorem tensorSplitEquiv_braiding (A p q : Nat) :
  (tensorSplitEquiv A p q).trans (homogeneousBraidingEquiv A p q) =
    (factorPermutationEquiv A (p + q) (blockPermutation p q)).trans
      ((finCongr
        (congrArg (tensorPowerDimension A) (Nat.add_comm p q))).trans
        (tensorSplitEquiv A q p)) := by
  apply Equiv.ext
  intro x
  simp [homogeneousBraidingEquiv]
```

#### 4.4.1497 Tensor product split equivalence of the inverse

**Statement.** For natural numbers  $A, p, q$ , a superoperator  $x$ : an explicit expression in the composition, the map induced by an index equivalence and the tensor product split equivalence equals  $x$ .

**Proof.** The key step rewrites with the fact that composition for superoperators is associative, the map induced by an index equivalence of a composite for superoperators and the identity of a composite for superoperators.

**Lean 4 source** `QLambda/Domain/Presheaf/SymmetricPowerCore.lean`

```
theorem tensorSplitEquiv_inverse (A p q : Nat)
  (x : Superoperator n (tensorPowerDimension A (p + q))) :
  Superoperator.comp
    (Superoperator.ofEquivalence (tensorSplitEquiv A p q).symm)
    (Superoperator.comp
      (Superoperator.ofEquivalence (tensorSplitEquiv A p q)) x) =
    x := by
  rw [Superoperator.comp_assoc, Superoperator.ofEquivalence_comp]
  convert Superoperator.identity_comp x using 2
  simp
```

#### 4.4.1498 Track linear of the presheaf linear/non-linear model of the deferred

**Statement.** Track L endpoint: premise-free presheafQuantumLNL is not claimed while glued ambient-CP Day bang at  $A=2$  (or a usable limited  $A \leq 1$  LNL) remains open. Formally: `DayBangArchitecture Boundary ∧ RouteASucceeded ∧ ¬ BangDegreeUnitRectangleHasSum 2`.

**Proof.** The witness is assembled directly from its components, using the Day exponential modality architecture boundary.

#### Lean 4 source `QLambda/Domain/Presheaf/TrackLDeferral.lean`

```
theorem trackL_presheafQuantumLNL_deferred :
  DayBangArchitectureBoundary /\ QLambda.Linear.RouteASucceeded /\
    not BangDegreeUnitRectangleHasSum 2 :=
  <day_bang_architecture_boundary, QLambda.Linear.routeA_succeeded,
    not_bangDegreeUnitRectangleHasSum_two>
```

#### 4.4.1499 Recursive source semantics ( $\mu/\text{fix}/\text{fold}/\text{unfolding}$ ) are deferred with Track L

**Statement.** Recursive source semantics ( $\mu/\text{fix}/\text{fold}/\text{unfold}$ ) are deferred with Track L: they need the nonlinear LNL layer blocked on Day bang glue. Formally:  $\neg \text{BangSplitEffectAdmissible } 2$ .

**Proof.** This is an instance of the fact that gate 8: raw all-dimensional Day-bang carrier bound fails at one qubit.

#### Lean 4 source `QLambda/Domain/Presheaf/TrackLDeferral.lean`

```
theorem trackL_recursive_semantics_deferred :
  not BangSplitEffectAdmissible 2 :=
  day_bang_raw_global_bound_fails_at_two
```

#### 4.4.1500 Full-language first-order adequacy is deferred

**Statement.** Full-language first-order adequacy is deferred. Track F supplies N-bounded fragment observations (closed FO ite  $\beta$ , Born $\leftrightarrow$ Instrument mass, quotation `FragCerts`); full-language adequacy still needs glued ambient-CP Day comonoid packaging (L10+) beyond L9's relative  $A \leq 1$  comonoids / degree-row gate. Formally:  $\text{DayBangArchitectureBoundary} \wedge \neg \text{BangDegreeUnitRectangleHasSum } 2$ .

**Proof.** The witness is assembled directly from its components, using the Day exponential modality architecture boundary.

#### Lean 4 source `QLambda/Domain/Presheaf/TrackLDeferral.lean`

```
theorem trackL_full_adequacy_deferred :
  DayBangArchitectureBoundary /\ not BangDegreeUnitRectangleHasSum 2 :=
  <day_bang_architecture_boundary, not_bangDegreeUnitRectangleHasSum_two>
```

#### 4.4.1501 Track linear of the full abstraction of the deferred

**Statement.** Full abstraction investigation is deferred to a positive Track L model or a precise no-go once glued ambient-CP Day comonoid packaging (L10+) exists. Formally:  $\text{DayBangArchitectureBoundary} \wedge \neg \text{BangDegreeUnitRectangleHasSum } 2$ .

**Proof.** The witness is assembled directly from its components, using the Day exponential modality architecture boundary.

#### Lean 4 source `QLambda/Domain/Presheaf/TrackLDeferral.lean`

```

theorem trackL_full_abstraction_deferred :
  DayBangArchitectureBoundary /\ not BangDegreeUnitRectangleHasSum 2 :=
  <day_bang_architecture_boundary, not_bangDegreeUnitRectangleHasSum_two>

```

#### 4.4.1502 The representable module $Q(-, A)$

**Definition.** The representable module  $Q(-, A)$ .

**Construction.** Constructed by supplying each component: zero, summation, act, act zero element, act zero functorial action, act identity, act composite and act sum element, among others. The accompanying laws are verified from the definitions.

#### Lean 4 source `QLambda/Domain/Presheaf/Yoneda.lean`

```

noncomputable def representable (A : Nat) : Module where
  obj n :=
    { Carrier := Superoperator n A
      zero := 0
      summation := SigmaMon.superoperatorPartialCountableSum }
  act := fun x f => Superoperator.comp x f
  act_zero_element := by
    intro m n f
    exact Superoperator.comp_zero_left f
  act_zero_map := by
    intro m n x
    exact Superoperator.comp_zero_right x
  act_id := by
    intro n x
    exact Superoperator.comp_identity x
  act_comp := by
    intro ? m n x f g
    exact (Superoperator.comp_assoc x f g).symm
  act_sum_element := by
    intro ? _ m n x s f h
    exact SigmaMon.ChoiSum.comp_right f h
  act_sum_map := by
    intro ? _ m n x f s h
    exact SigmaMon.ChoiSum.comp_left x h
  act_sum_from_one := by
    intro ? _ m x s f h
    obtain <?, h?> := SigmaMon.ChoiSum.comp_from_one f h
    exact <?, h?>
  act_sum_tensor_from_one := by
    intro ? _ m B x s f h
    match B with
    | 0 =>
      refine <0, ?_>
      have hz : forall i,
        Superoperator.comp (x i)
          (Superoperator.tensor (f i) (Superoperator.identity 0)) =
          0 := by
        intro i
        have hT :
          Superoperator.tensor (f i) (Superoperator.identity 0) =
          (0 : Superoperator (m * 0) (1 * 0)) := by

```

```

    apply Superoperator.ext
    apply CPMMap.ext
    ext a b
    have : IsEmpty (Fin (1 * 0)) := by
      simp only [Nat.mul_zero]; infer_instance
    exact isEmptyElim (a.1 : Fin (1 * 0))
    rw [hT]
    exact Superoperator.comp_zero_right _
  exact
    (Fiber.hasSum_congr
      { Carrier := Superoperator (m * 0) A
        zero := 0
        summation := SigmaMon.superoperatorPartialCountableSum }
      hz).mpr
    (Fiber.hasSum_zero _)
| 1 =>
  -- `1 * 1 = 1` definitionally (numeral); `m * 1 = m` only propositionally.
  have hx1 : SigmaMon.ChoiSum.HasSum
    (fun i => (x i : Superoperator 1 A))
    (s : Superoperator 1 A) := h
  obtain <?, h?> := SigmaMon.ChoiSum.comp_from_one f hx1
  -- `? comp ??` lives at fiber `m * 1`.
  refine
    <Superoperator.comp ? (Superoperator.tensorRightUnitor m), ?_>
  have hrunitor1 :
    Superoperator.tensorRightUnitorInv 1 =
      Superoperator.identity 1 := by
    rw [show Superoperator.tensorRightUnitorInv 1 =
      Superoperator.ofEquivalence
        (Superoperator.tensorRightUnitorEquiv 1).symm from rfl]
  have hEq :
    (Superoperator.tensorRightUnitorEquiv 1).symm =
      Equiv.refl (Fin 1) := by
    apply Equiv.ext
    intro i
    apply Fin.ext
    omega
  rw [hEq, Superoperator.ofEquivalence_refl]
  have htensor (g : Superoperator m 1) :
    Superoperator.tensor g (Superoperator.identity 1) =
      Superoperator.comp (Superoperator.tensorRightUnitorInv 1)
        (Superoperator.comp g
          (Superoperator.tensorRightUnitor m)) := by
  have hnata := Superoperator.tensorRightUnitor_naturality g
  have h :=
    congrArg
      (Superoperator.comp (Superoperator.tensorRightUnitorInv 1)) hnata
  simp [Superoperator.comp_assoc,
    Superoperator.tensorRightUnitor_inv_hom,
    Superoperator.identity_comp] using h
  have hfam :
    (fun i =>
      Superoperator.comp (x i)
        (Superoperator.tensor (f i) (Superoperator.identity 1))) =
      fun i =>
        Superoperator.comp

```



```

      (Superoperator.comp (x i) (f i))
      (Superoperator.tensorRightUnitor m) := by
    funext i
    rw [htensor, hrunitor1, Superoperator.identity_comp,
      Superoperator.comp_assoc]
  have h?? :
    SigmaMon.ChoiSum.HasSum
      (fun i =>
        Superoperator.comp (Superoperator.comp (x i) (f i))
          (Superoperator.tensorRightUnitor m))
        (Superoperator.comp ?
          (Superoperator.tensorRightUnitor m)) :=
    SigmaMon.ChoiSum.comp_right
      (Superoperator.tensorRightUnitor m) h?
  rw [hfam]
  exact h??
| n + 2 =>
  -- Discard majorant `?` (effect `I`), residual effects `I - E_i`, then
  -- extract the target family as a Bool-subfamily of a flat Choi sum.
  let ? : Superoperator m 1 := by
    let C : Matrix (Fin 1 x Fin m) (Fin 1 x Fin m) ? :=
      fun p q => (1 : Matrix (Fin m) (Fin m) ?) q.2 p.2
    have hC : C.PosSemidef :=
      (Matrix.PosSemidef.one (n := Fin m)).transpose.submatrix
        (Prod.snd : Fin 1 x Fin m -> Fin m)
    exact
      <{ choi := C, choi_pos := hC },
      (traceNonincreasing_iff_effect_le_one _).mpr (by
        have hE : <C, hC> : CMap m 1).effect = 1 := by
          ext i j
          simp [CMap.effect, C]
          simp [hE])>
  have h?E : ?.cp.effect = (1 : Matrix (Fin m) (Fin m) ?) := by
    ext i j
    simp [?, CMap.effect]
  have hchoi_form (? : Superoperator m 1)
    (p q : Fin 1 x Fin m) :
    ?.cp.choi p q = ?.cp.effect q.2 p.2 := by
    simp only [CMap.effect, Fin.sum_univ_one]
    congr 1
    * exact Prod.ext (Subsingleton.elim _ _) rfl
    * exact Prod.ext (Subsingleton.elim _ _) rfl
  have hf_le (i : ?) : (f i).cp <= ?.cp := by
    change (f i).cp.choi <= ?.cp.choi
    rw [Matrix.le_iff]
  have hE :
    ((1 : Matrix (Fin m) (Fin m) ?) - (f i).cp.effect).PosSemidef :=
    Matrix.le_iff.mp
      (CMap.effect_le_one_of_trace_nonincreasing (f i).cp
        (f i).trace_nonincreasing)
  have hdiff :
    ?.cp.choi - (f i).cp.choi =
      ((1 : Matrix (Fin m) (Fin m) ?) -
        (f i).cp.effect)?.submatrix
        (Prod.snd : Fin 1 x Fin m -> Fin m)
        (Prod.snd : Fin 1 x Fin m -> Fin m) := by

```

```

    ext p q
    simp only [Matrix.sub_apply, Matrix.submatrix_apply,
      Matrix.transpose_apply, hchoi_form, h?E]
  rw [hdiff]
  exact hE.transpose.submatrix _
let r (i : ?) : Superoperator m 1 := by
  let R := CPMMap.residualOfLE (hf_le i)
  refine <R, (traceNonincreasing_iff_effect_le_one _).mpr ?_>
  -- Residual effect is `I - effect(f i) <= I`.
  have hRchoi (p q : Fin 1 x Fin m) :
    R.choi p q =
      ((1 : Matrix (Fin m) (Fin m) ?) - (f i).cp.effect) q.2 p.2 := by
        change (?cp.choi - (f i).cp.choi) p q = _
        simp [Matrix.sub_apply, hchoi_form, h?E]
  have hRe :
    R.effect =
      (1 : Matrix (Fin m) (Fin m) ?) - (f i).cp.effect := by
    ext a b
    simp only [CPMap.effect, Fin.sum_univ_one, hRchoi]
  have hIE :
    ((1 : Matrix (Fin m) (Fin m) ?) - (f i).cp.effect) <= 1 := by
    rw [Matrix.le_iff]
    have hEpos := CPMMap.effect_posSemidef (f i).cp
    simp [sub_sub_cancel] using hEpos
    simp [hRe] using hIE
  have hadd_cp (i : ?) :
    (f i).cp + (r i).cp = ?.cp := by
    simp [r]
  have hten_cp (i : ?) :
    CPMMap.tensor (f i).cp (CPMap.identity (n + 2)) +
      CPMMap.tensor (r i).cp (CPMap.identity (n + 2)) =
      CPMMap.tensor ?.cp (CPMap.identity (n + 2)) := by
    rw [← CPMMap.tensor_add_left, hadd_cp]
  have hten (i : ?) :
    (Superoperator.tensor (f i)
      (Superoperator.identity (n + 2))) .cp +
      (Superoperator.tensor (r i)
      (Superoperator.identity (n + 2))) .cp =
      (Superoperator.tensor ?
      (Superoperator.identity (n + 2))) .cp := by
    simp [Superoperator.cp_tensor, show
      (Superoperator.identity (n + 2)).cp =
        CPMMap.identity (n + 2) from rfl] using hten_cp i
  have hcomp_add (i : ?) :
    (Superoperator.comp (x i)
      (Superoperator.tensor (f i)
      (Superoperator.identity (n + 2)))) .cp +
      (Superoperator.comp (x i)
      (Superoperator.tensor (r i)
      (Superoperator.identity (n + 2)))) .cp =
      (Superoperator.comp (x i)
      (Superoperator.tensor ?
      (Superoperator.identity (n + 2)))) .cp := by
    simp only [Superoperator.cp_comp]
    rw [← CPMMap.comp_add_left, hten]
let F : (Sigma _ : ?, Bool) -> Superoperator (m * (n + 2)) A :=

```

```

fun p =>
  if p.2 then
    Superoperator.comp (x p.1)
      (Superoperator.tensor (f p.1)
        (Superoperator.identity (n + 2)))
  else
    Superoperator.comp (x p.1)
      (Superoperator.tensor (r p.1)
        (Superoperator.identity (n + 2)))
have hrow (i : ?) :
  SigmaMon.ChoiSum.HasSum (fun b : Bool => F <i, b>)
    (Superoperator.comp (x i)
      (Superoperator.tensor ?
        (Superoperator.identity (n + 2)))) := by
change SigmaMon.ChoiSum.HasSum
  (fun b : Bool =>
    if b then
      Superoperator.comp (x i)
        (Superoperator.tensor (f i)
          (Superoperator.identity (n + 2)))
    else
      Superoperator.comp (x i)
        (Superoperator.tensor (r i)
          (Superoperator.identity (n + 2))))
  -
have hsum :
  _root_.HasSum
    (fun b : Bool =>
      (if b then
        Superoperator.comp (x i)
          (Superoperator.tensor (f i)
            (Superoperator.identity (n + 2)))
        else
          Superoperator.comp (x i)
            (Superoperator.tensor (r i)
              (Superoperator.identity (n + 2))))).cp.choi)
    ((Superoperator.comp (x i)
      (Superoperator.tensor ?
        (Superoperator.identity (n + 2))))).cp.choi) := by
let Tf :=
  Superoperator.comp (x i)
    (Superoperator.tensor (f i)
      (Superoperator.identity (n + 2)))
let Tr :=
  Superoperator.comp (x i)
    (Superoperator.tensor (r i)
      (Superoperator.identity (n + 2)))
let T? :=
  Superoperator.comp (x i)
    (Superoperator.tensor ?
      (Superoperator.identity (n + 2)))
have hfin :
  _root_.HasSum
    (fun b : Bool => (if b then Tf else Tr).cp.choi)
    (? b : Bool, (if b then Tf else Tr).cp.choi) :=
  hasSum_fintype _

```

```

have htot :
  (? b : Bool, (if b then Tf else Tr).cp.choi) = T?.cp.choi := by
calc
  (? b : Bool, (if b then Tf else Tr).cp.choi)
    = (if true then Tf else Tr).cp.choi +
      (if false then Tf else Tr).cp.choi :=
      Fintype.sum_bool _
  _ = Tf.cp.choi + Tr.cp.choi := by simp
  _ = (Tf.cp + Tr.cp).choi := (CPMap.choi_add Tf.cp Tr.cp).symm
  _ = T?.cp.choi := congrArg CPMMap.choi (hcomp_add i)
exact htot |> hfin
exact hsum
have hmaj :
  SigmaMon.ChoiSum.HasSum
    (fun i =>
      Superoperator.comp (x i)
        (Superoperator.tensor ?
          (Superoperator.identity (n + 2))))
    (Superoperator.comp s
      (Superoperator.tensor ?
        (Superoperator.identity (n + 2)))) :=
  SigmaMon.ChoiSum.comp_right
    (Superoperator.tensor ? (Superoperator.identity (n + 2))) h
have hflat :
  SigmaMon.ChoiSum.HasSum F
    (Superoperator.comp s
      (Superoperator.tensor ?
        (Superoperator.identity (n + 2)))) := by
exact
  (SigmaMon.superoperatorPartialCountableSum.flatten
    (fun i b => F <i, b>)
    (Superoperator.comp s
      (Superoperator.tensor ?
        (Superoperator.identity (n + 2))))) .mpr
  <fun i =>
    Superoperator.comp (x i)
      (Superoperator.tensor ?
        (Superoperator.identity (n + 2))),
    hrow, hmaj>
-- Target family is the `true` Bool-slice.
let S : Set (Sigma _ : ?, Bool) := {p | p.2 = true}
obtain <?, h?> := SigmaMon.ChoiSum.subfamily_hasSum hflat S
let e : ?? S :=
  { toFun := fun i => <<i, true>, rfl>
    invFun := fun p => p.1.1
    left_inv := fun i => rfl
    right_inv := by
      rintro <<i, b>, hb>
      -- `hb : (<i, b> : Sigma _, Bool).2 = true`
      change b = true at hb
      subst hb
      rfl }
have hre :
  SigmaMon.ChoiSum.HasSum
    (fun i => F (e i)) ? :=
  (SigmaMon.ChoiSum.reindex e (fun p : S => F p) ?) .mpr h?

```

```

refine <?, ?_>
change SigmaMon.ChoiSum.HasSum
  (fun i =>
    Superoperator.comp (x i)
      (Superoperator.tensor (f i)
        (Superoperator.identity (n + 2))))
  ?
convert hre using 1
funext i
rfl

```

#### 4.4.1503 Representable module of the obj

**Statement.** For natural numbers  $A, n$ :  $((\text{representable } A) . \text{obj } n) . \text{Carrier}$  equals the superoperator of  $n$  and  $A$ .

**Proof.** By definition. Unfolding the carrier turns the left-hand side,  $((\text{representable } A) . \text{obj } n) . \text{Carrier}$ , into the right-hand side, the superoperator of  $n$  and  $A$ ; the two sides are the same term.

**Lean 4 source** [QLambda/Domain/Presheaf/Yoneda.lean](#)

```

theorem representable_obj (A n : Nat) :
  ((representable A) . obj n) . Carrier = Superoperator n A :=
  rfl

```

#### 4.4.1504 Representable module of the act

**Statement.** For natural numbers  $A, m, n$ , superoperators  $x, f$ :  $(\text{representable } A) . \text{act } x \ f$  equals the composite of  $x$  after  $f$ .

**Proof.** By definition: the left-hand side,  $(\text{representable } A) . \text{act } x \ f$ , and the right-hand side, the composite of  $x$  after  $f$ , unfold to the same term.

**Lean 4 source** [QLambda/Domain/Presheaf/Yoneda.lean](#)

```

theorem representable_act {A m n : Nat}
  (x : Superoperator n A) (f : Superoperator m n) :
  (representable A) . act x f = Superoperator.comp x f :=
  rfl

```

#### 4.4.1505 Yoneda sends a base superoperator to postcomposition by that map

**Definition.** Yoneda sends a base superoperator to postcomposition by that map.

**Construction.** Constructed by supplying each component: application, functorial action zero, functorial action sum and naturality. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/Presheaf/Yoneda.lean](#)

```

noncomputable def yonedaMap {A B : Nat} (f : Superoperator A B) :
  Hom (representable A) (representable B) where
  app := fun _ x => Superoperator.comp f x
  map_zero := fun _ => Superoperator.comp_zero_right f

```

```

map_sum := by
  intro ? _ n x s h
  exact SigmaMon.ChoiSum.comp_left f h
natrality := by
  intro m n x g
  exact Superoperator.comp_assoc f x g

```

#### 4.4.1506 Components of the Yoneda image

**Statement.** For natural numbers  $A, B, n$ , superoperators  $f, x$ :  $(\text{yonedaMap } f) . \text{app } n \ x$  equals the composite of  $f$  after  $x$ .

**Proof.** By definition: the left-hand side,  $(\text{yonedaMap } f) . \text{app } n \ x$ , and the right-hand side, the composite of  $f$  after  $x$ , unfold to the same term.

##### Lean 4 source `QLambda/Domain/Presheaf/Yoneda.lean`

```

theorem yonedaMap_app {A B n : Nat} (f : Superoperator A B)
  (x : Superoperator n A) :
  (yonedaMap f).app n x = Superoperator.comp f x :=
  rfl

```

#### 4.4.1507 The Yoneda image preserves identities

**Statement.** For a natural number  $A$ : the Yoneda image of the identity on dimension  $A$  equals the identity of the representable module of  $A$ .

**Proof.** Both sides are compared pointwise (by extensionality). It follows from the identity of a composite for superoperators.

##### Lean 4 source `QLambda/Domain/Presheaf/Yoneda.lean`

```

theorem yonedaMap_id (A : Nat) :
  yonedaMap (Superoperator.identity A) = Hom.id (representable A) := by
  ext n x
  exact Superoperator.identity_comp x

```

#### 4.4.1508 The Yoneda image preserves composition

**Statement.** For natural numbers  $A, B, C$ , superoperators  $g, f$ : the Yoneda image of the composite of  $g$  after  $f$  equals the composite of the Yoneda image of  $g$  after the Yoneda image of  $f$ .

**Proof.** Both sides are compared pointwise (by extensionality). It follows from the fact that composition for superoperators is associative.

##### Lean 4 source `QLambda/Domain/Presheaf/Yoneda.lean`

```

theorem yonedaMap_comp {A B C : Nat}
  (g : Superoperator B C) (f : Superoperator A B) :
  yonedaMap (Superoperator.comp g f) =
  Hom.comp (yonedaMap g) (yonedaMap f) := by
  ext n x
  exact (Superoperator.comp_assoc g f x).symm

```

#### 4.4.1509 A module element determines a natural map out of a representable

**Definition.** A module element determines a natural map out of a representable.

**Construction.** Constructed by supplying each component: application, functorial action zero, functorial action sum and naturality. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/Presheaf/Yoneda.lean](#)

```
def fromElement (M : Module.{u}) {A : Nat} (x : (M.obj A).Carrier) :  
  Hom (representable A) M where  
  app := fun _ f => M.act x f  
  map_zero := fun _ => M.act_zero_map x  
  map_sum := by  
    intro ? _ n f s h  
    exact M.act_sum_map x h  
  naturality := by  
    intro m n f g  
    exact (M.act_comp x f g).symm
```

#### 4.4.1510 Evaluation of a natural map at the identity element

**Definition.** Evaluation of a natural map at the identity element.

**Construction.** Defined to be  $\eta.app\ A\ (Superoperator.identity\ A)$ .

**Lean 4 source** [QLambda/Domain/Presheaf/Yoneda.lean](#)

```
def toElement (M : Module.{u}) {A : Nat}  
  (? : Hom (representable A) M) : (M.obj A).Carrier :=  
  ?.app A (Superoperator.identity A)
```

#### 4.4.1511 Passage to element of the from element

**Statement.** For a superoperator module  $M$ , a natural number  $A$ : the passage to element of  $M$  and the from element of  $M$  and  $x$  equals  $x$ .

**Proof.** The proof term combines the facts named in it directly.

**Lean 4 source** [QLambda/Domain/Presheaf/Yoneda.lean](#)

```
theorem toElement_fromElement (M : Module.{u}) {A : Nat}  
  (x : (M.obj A).Carrier) :  
    toElement M (fromElement M x) = x :=  
  M.act_id x
```

#### 4.4.1512 From element of the passage to element

**Statement.** For a superoperator module  $M$ , a natural number  $A$ , a module morphism  $\eta$ : the from element of  $M$  and the passage to element of  $M$  and  $\eta$  equals  $\eta$ .

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with congruence of function application.

#### Lean 4 source `QLambda/Domain/Presheaf/Yoneda.lean`

```
theorem fromElement_toElement (M : Module.{u}) {A : Nat}
  (? : Hom (representable A) M) :
  fromElement M (toElement M ?) = ? := by
  ext n f
  change M.act (? .app A (Superoperator.identity A)) f = ? .app n f
  rw [show M.act (? .app A (Superoperator.identity A)) f =
    ? .app n
    ((representable A).act (Superoperator.identity A) f) from
    (? .naturality (Superoperator.identity A) f).symm]
  have hf :
    (representable A).act (Superoperator.identity A) f = f :=
    Superoperator.identity_comp f
  exact congrArg (? .app n) hf
```

#### 4.4.1513 The concrete enriched Yoneda correspondence

**Definition.** The concrete enriched Yoneda correspondence.

**Construction.** Constructed by supplying each component: passage to fun, inverse fun, left inverse and right inverse. The accompanying laws are verified from the definitions.

#### Lean 4 source `QLambda/Domain/Presheaf/Yoneda.lean`

```
def yonedaEquiv (M : Module.{u}) (A : Nat) :
  Hom (representable A) M ? (M.obj A).Carrier where
  toFun := toElement M
  invFun := fromElement M
  left_inv := fromElement_toElement M
  right_inv := toElement_fromElement M
```

#### 4.4.1514 Pointwise formula for the Yoneda equivalence

**Statement.** For a superoperator module  $M$ , a natural number  $A$ , a module morphism  $\eta$ : the Yoneda equivalence of  $M, A, \eta$  equals  $\eta . \text{app } A \text{ (Superoperator.identity } A)$ .

**Proof.** By definition. Unfolding the Yoneda equivalence turns the left-hand side, the Yoneda equivalence of  $M, A, \eta$ , into the right-hand side,  $\eta . \text{app } A \text{ (Superoperator.identity } A)$ ; the two sides are the same term.

#### Lean 4 source `QLambda/Domain/Presheaf/Yoneda.lean`

```
theorem yonedaEquiv_apply (M : Module.{u}) (A : Nat)
  (? : Hom (representable A) M) :
  yonedaEquiv M A ? = ? .app A (Superoperator.identity A) :=
  rfl
```

#### 4.4.1515 Pointwise formula for the Yoneda equivalence of the symmetry

**Statement.** For a superoperator module  $M$ , natural numbers  $A, n$ , a superoperator  $f$ :  $((\text{yonedaEquiv } M A) . \text{symm } x) . \text{app } n \text{ } f$  equals the act of  $x$  and  $f$ .



**Proof.** By definition: the left-hand side,  $((\text{yonedaEquiv } M \ A) . \text{symm } x) . \text{app } n \ f$ , and the right-hand side, the act of  $x$  and  $f$ , unfold to the same term.

**Lean 4 source** [QLambda/Domain/Presheaf/Yoneda.lean](#)

```
theorem yonedaEquiv_symm_apply (M : Module.{u}) (A : Nat)
  (x : (M.obj A).Carrier) (n : Nat) (f : Superoperator n A) :
  ((yonedaEquiv M A).symm x).app n f = M.act x f :=
  rfl
```

#### 4.4.1516 $\omega$ -completeness on module morphisms

**Definition.** Equip  $\text{ClassicalObject.Hom } A \ B$  with its canonical  $\omega$ -completeness.

**Construction.** Given by the classical morphism  $\omega$  completeness of the module of  $A$  and  $B$ .

**Lean 4 source** [QLambda/Domain/Presheaf/biorthogonalHomOmegaComplete.lean](#)

```
noncomputable instance biorthogonalHomOmegaComplete
  (A B : BiorthogonalObject) :
  QLambda.Domain.OmegaComplete (ClassicalObject.Hom A B) :=
  classicalHomOmegaComplete A.module B
```

#### 4.4.1517 Least element on module morphisms

**Definition.** Equip  $\text{ClassicalObject.Hom } A \ B$  with its canonical least element.

**Construction.** Given by the classical morphism order bottom element of the module of  $A$  and  $B$ .

**Lean 4 source** [QLambda/Domain/Presheaf/biorthogonalHomOrderBot.lean](#)

```
noncomputable instance biorthogonalHomOrderBot
  (A B : BiorthogonalObject) :
  OrderBot (ClassicalObject.Hom A B) :=
  classicalHomOrderBot A.module B
```

#### 4.4.1518 Partial order on module morphisms

**Definition.** Equip  $\text{ClassicalObject.Hom } A \ B$  with its canonical partial order.

**Construction.** Given by the classical morphism partial order of the module of  $A$  and  $B$ .

**Lean 4 source** [QLambda/Domain/Presheaf/biorthogonalHomPartialOrder.lean](#)

```
noncomputable instance biorthogonalHomPartialOrder
  (A B : BiorthogonalObject) :
  PartialOrder (ClassicalObject.Hom A B) :=
  classicalHomPartialOrder A.module B
```

#### 4.4.1519 Monotonicity of the classical morphism of the paired

**Statement.** For a superoperator module  $M$ : if  $c$  is monotone, then  $\text{fun } k \Rightarrow \text{closedPairingEquiv } M \ N \ (c \ k)$  is monotone.

**Proof.** Given the data, the conclusion is produced directly from the hypothesis that  $c$  is monotone.

**Lean 4 source** `QLambda/Domain/Presheaf/classicalHomOmegaComplete.lean`

```
theorem classicalHom_paired_mono {M : Module}
  {N : BiorthogonalObject}
  {c : Nat -> Hom M N.module} (hc : Monotone c) :
  Monotone (fun k => closedPairingEquiv M N (c k)) :=
  fun _ _ h n x => hc h n x
```

#### 4.4.1520 $\omega$ -suprema of classical homs, transported from maps into the unit

**Definition.**  $\omega$ -suprema of classical homs, transported from maps into the unit.

**Construction.** Defined by an explicit formula built from the closed term pairing equivalence, the  $\omega$ -completeness and the classical morphism paired monotonicity.

**Lean 4 source** `QLambda/Domain/Presheaf/classicalHomOmegaComplete.lean`

```
noncomputable def classicalHomOmegaSup (M : Module)
  (N : BiorthogonalObject)
  (c : Nat -> Hom M N.module) (hc : Monotone c) :
  Hom M N.module :=
  (closedPairingEquiv M N).symm
  (QLambda.Domain.OmegaComplete.?Sup
    (fun k => closedPairingEquiv M N (c k))
    (classicalHom_paired_mono hc))
```

#### 4.4.1521 $\omega$ -completeness on module morphisms

**Definition.** Equip  $\text{Hom } M \ N.\text{module}$  with its canonical  $\omega$ -completeness.

**Construction.** The operations are given by: supremum of an  $\omega$ -chain. Each required law follows from the corresponding property of the underlying data.

**Lean 4 source** `QLambda/Domain/Presheaf/classicalHomOmegaComplete.lean`

```
noncomputable instance classicalHomOmegaComplete
  (M : Module) (N : BiorthogonalObject) :
  QLambda.Domain.OmegaComplete (Hom M N.module) where
  ?Sup := classicalHomOmegaSup M N
  le_?Sup c hc k := by
    intro n x
    have h :=
      QLambda.Domain.OmegaComplete.le_?Sup
        (fun r => closedPairingEquiv M N (c r))
        (classicalHom_paired_mono hc) k
    change
      (show Superoperator n 1 from
        (closedPairingEquiv M N (c k)).app n x) <=
```

```

      (show Superoperator n 1 from
        (closedPairingEquiv M N
          (classicalHomOmegaSup M N c hc)).app n x)
    simp only [classicalHomOmegaSup, Equiv.apply_symm_apply]
    exact h n x
?Sup_le c hc f hf := by
  intro n x
  have h :=
    QLambda.Domain.OmegaComplete.?Sup_le
      (fun r => closedPairingEquiv M N (c r))
      (classicalHom_paired_mono hc)
      (closedPairingEquiv M N f)
      (fun k => show ClassicalHomLE M N (c k) f from hf k)
  change
    (show Superoperator n 1 from
      (closedPairingEquiv M N
        (classicalHomOmegaSup M N c hc)).app n x) <=
      (show Superoperator n 1 from
        (closedPairingEquiv M N f).app n x)
    simp only [classicalHomOmegaSup, Equiv.apply_symm_apply]
    exact h n x

```

#### 4.4.1522 Least element on module morphisms

**Definition.** Equip  $\text{Hom } M \text{ } N$ .module with its canonical least element.

**Construction.** The operations are given by: bottom element. Each required law follows from the corresponding property of the underlying data.

**Lean 4 source** `QLambda/Domain/Presheaf/classicalHomOrderBot.lean`

```

noncomputable instance classicalHomOrderBot
  (M : Module) (N : BiorthogonalObject) :
  OrderBot (Hom M N.module) where
  bot := 0
  bot_le f := by
    intro n x
    have hz := closedPairingEquiv_zero M N
    change
      (show Superoperator n 1 from
        (closedPairingEquiv M N 0).app n x) <=
        (show Superoperator n 1 from
          (closedPairingEquiv M N f).app n x)
    rw [hz]
    exact bot_le

```

#### 4.4.1523 Pointwise Choi order transported along the closed pairing

**Definition.** Pointwise Choi order transported along the closed pairing.

**Construction.** Defined to be the unit morphism order of the Day tensor product of  $M$  and  $\text{Day Negation.neg } N$ .module, the closed term pairing equivalence of  $M$ ,  $N$ ,  $f$ , the closed term pairing equivalence of  $M$ ,  $N$ ,  $g$ .

#### Lean 4 source `QLambda/Domain/Presheaf/classicalHomPartialOrder.lean`

```
def ClassicalHomLE (M : Module) (N : BiorthogonalObject)
  (f g : Hom M N.module) : Prop :=
  UnitHomLE (dayTensor M (DayNegation.neg N.module))
  (closedPairingEquiv M N f) (closedPairingEquiv M N g)
```

#### 4.4.1524 Partial order on module morphisms

**Definition.** Equip  $\text{Hom } M \text{ } N.\text{module}$  with its canonical partial order.

**Construction.** The operations are given by: `order`. Each required law follows from the corresponding property of the underlying data.

#### Lean 4 source `QLambda/Domain/Presheaf/classicalHomPartialOrder.lean`

```
noncomputable instance classicalHomPartialOrder
  (M : Module) (N : BiorthogonalObject) :
  PartialOrder (Hom M N.module) where
le := ClassicalHomLE M N
le_refl f := by
  intro n x
  exact le_rfl
le_trans f g h hfg hgh := by
  intro n x
  exact (hfg n x).trans (hgh n x)
le_antisymm f g hfg hgf := by
  apply (closedPairingEquiv M N).injective
  apply Hom.ext
  intro n x
  change
    (show Superoperator n 1 from
      (closedPairingEquiv M N f).app n x) =
      (show Superoperator n 1 from
        (closedPairingEquiv M N g).app n x)
  exact le_antisymm (hfg n x) (hgf n x)
```

#### 4.4.1525 Ambient CP superoperator module on CP-map modules

**Definition.** Equip  $\text{cpmModule } B$  with its canonical ambient cp superoperator module.

**Construction.** The operations are given by: `has sum addition` and `has act sum from dimension`. Each required law follows from the corresponding property of the underlying data.

#### Lean 4 source `QLambda/Domain/Presheaf/cpmModule_ambientCP.lean`

```
instance cpmModule_ambientCP (B : Nat) : AmbientCPModule (cpmModule B) where
  has_sum_add := fun n => Fiber.HasSumAdd.cpmModule B n
  has_act_sum_from_dim := HasActSumFromDim.cpmModule B
```

#### 4.4.1526 Addition on completely positive maps

**Definition.** Equip  $\text{CPMap } n \text{ } m$  with its canonical addition.

**Construction.** Given by  $\langle \text{add} \rangle$ .

**Lean 4 source** [QLambda/Domain/Presheaf/instAddCMap.lean](#)

```
instance instAddCMap : Add (CMap n m) := <add>
```

#### 4.4.1527 Choi matrix of a sum for completely positive maps

**Statement.** For completely positive maps  $\Phi, \Psi$ :  $(\Phi + \Psi).choi$  equals the sum of the Choi matrix of  $\Phi$  and the Choi matrix of  $\Psi$ .

**Proof.** By definition. Unfolding the Choi matrix turns the left-hand side,  $(\Phi + \Psi).choi$ , into the right-hand side, the sum of the Choi matrix of  $\Phi$  and the Choi matrix of  $\Psi$ ; the two sides are the same term.

**Lean 4 source** [QLambda/Domain/Presheaf/instAddCMap.lean](#)

```
theorem choi_add (?? : CMap n m) :  
  (?? + ?).choi = ?.choi + ?.choi :=  
  rfl
```

#### 4.4.1528 Commutative additive monoid structure on completely positive maps

**Definition.** Equip  $\text{CMap } n \ m$  with its canonical commutative additive monoid structure.

**Construction.** The operations are given by: zero, addition and natural-number scalar multiplication. Each required law follows from the corresponding property of the underlying data.

**Lean 4 source** [QLambda/Domain/Presheaf/instAddCommMonoidCMap.lean](#)

```
instance instAddCommMonoidCMap : AddCommMonoid (CMap n m) where  
  zero := 0  
  add := (* + *)  
  zero_add ? := ext (zero_add ?.choi)  
  add_zero ? := ext (add_zero ?.choi)  
  add_assoc ? ? ? := ext (add_assoc ?.choi ?.choi ?.choi)  
  add_comm ? ? := ext (add_comm ?.choi ?.choi)  
  nsmul := nsmulRec
```

#### 4.4.1529 Order relation on completely positive maps

**Definition.** Equip  $\text{CMap } n \ m$  with its canonical order relation.

**Construction.** Given by  $\langle \text{fun } \Phi \ \Psi \Rightarrow \Phi.choi \leq \Psi.choi \rangle$ .

**Lean 4 source** [QLambda/Domain/Presheaf/instLECMap.lean](#)

```
instance instLECMap : LE (CMap n m) :=  
  <fun ?? => ?.choi <= ?.choi>
```

#### 4.4.1530 Module structure on NN reals

**Definition.** Equip `NNReal (CMap n m)` with its canonical module structure.

**Construction.** Given by the displayed expression.

**Lean 4 source** `QLambda/Domain/Presheaf/instModuleNNRealCMap.lean`

```
noncomputable instance instModuleNNRealCMap : Module NNReal (CMap n m) where
  one_smul ? := by
    apply ext
    simp
  mul_smul c d ? := by
    apply ext
    simp [mul_smul]
  smul_add c ? ? := by
    apply ext
    simp [smul_add]
  smul_zero c := by
    apply ext
    simp
  add_smul c d ? := by
    apply ext
    simp [add_smul]
  zero_smul ? := by
    apply ext
    simp
```

#### 4.4.1531 Least element on completely positive maps

**Definition.** Equip `CMap n m` with its canonical least element.

**Construction.** The operations are given by: bottom element. Each required law follows from the corresponding property of the underlying data.

**Lean 4 source** `QLambda/Domain/Presheaf/instOrderBotCMap.lean`

```
instance instOrderBotCMap : OrderBot (CMap n m) where
  bot := 0
  bot_le ? := by
    change (0 : Matrix (Fin m x Fin n) (Fin m x Fin n) ?) <= ?.choi
    rw [Matrix.le_iff]
    simpa using ?.choi_pos
```

#### 4.4.1532 Least element on superoperators

**Definition.** Equip `Superoperator n m` with its canonical least element.

**Construction.** The operations are given by: bottom element. Each required law follows from the corresponding property of the underlying data.

**Lean 4 source** `QLambda/Domain/Presheaf/instOrderBotSuperoperator.lean`

```
instance instOrderBotSuperoperator {n m : Nat} : OrderBot (Superoperator n m) where
  bot := 0
  bot_le f := @bot_le (CMap n m) _ _ f.cp
```

#### 4.4.1533 Partial order on completely positive maps

**Definition.** Equip  $\text{CMap } n \ m$  with its canonical partial order.

**Construction.** Given by the displayed expression.

**Lean 4 source** `QLambda/Domain/Presheaf/instPartialOrderCMap.lean`

```
instance instPartialOrderCMap : PartialOrder (CMap n m) where
  le_refl ? := by
    change ?.choi <= ?.choi
    exact le_refl
  le_trans ? ? ? h?? h?? := by
    change ?.choi <= ?.choi
    exact le_trans h?? h??
  le_antisymm ? ? h?? h?? := by
    apply ext
    exact le_antisymm h?? h??
```

#### 4.4.1534 Partial order on superoperators

**Definition.** Equip  $\text{Superoperator } n \ m$  with its canonical partial order.

**Construction.** Given by the displayed expression.

**Lean 4 source** `QLambda/Domain/Presheaf/instPartialOrderSuperoperator.lean`

```
instance instPartialOrderSuperoperator {n m : Nat} : PartialOrder (Superoperator n m)
  where
    le f g := f.cp <= g.cp
    le_refl _ := le_refl
    le_trans _ _ _ h k := h.trans k
    le_antisymm f g h k := ext (le_antisymm h k)
```

#### 4.4.1535 Scalar action on NN reals

**Definition.** Equip  $\text{NNReal } (\text{CMap } n \ m)$  with its canonical scalar action.

**Construction.** Given by  $\langle \text{nnsMul} \rangle$ .

**Lean 4 source** `QLambda/Domain/Presheaf/instSMulNNRealCMap.lean`

```
noncomputable instance instSMulNNRealCMap : SMul NNReal (CMap n m) :=
  <nnsMul>
```

#### 4.4.1536 Choi matrix of a nonnegative multiple for completely positive maps

**Statement.** For a completely positive map  $\Phi$ :  $(c \cdot \Phi).choi$  equals the Choi matrix of  $\Phi$  scaled by  $c$ .

**Proof.** By definition. Unfolding the Choi matrix turns the left-hand side,  $(c \cdot \Phi).choi$ , into the right-hand side, the Choi matrix of  $\Phi$  scaled by  $c$ ; the two sides are the same term.

**Lean 4 source** `QLambda/Domain/Presheaf/instSMulNNRealCMap.lean`

```
theorem choi_nnsml (c : NNReal) (? : CPMMap n m) :
  (c * ?).choi = (c : ?) * ?.choi :=
  rfl
```

#### 4.4.1537 Zero element on completely positive maps

**Definition.** Equip  $\text{CPMap } n \ m$  with its canonical zero element.

**Construction.** Given by  $\langle \text{zero} \rangle$ .

**Lean 4 source** [QLambda/Domain/Presheaf/instZeroCPMap.lean](#)

```
instance instZeroCPMap : Zero (CPMap n m) := <zero>
```

#### 4.4.1538 Choi matrix of zero for completely positive maps

**Statement.** The Choi matrix of 0 equals 0. Formally:  $0.\text{choi} = 0$ .

**Proof.** It follows from the Choi matrix of the empty list for Kraus families.

**Lean 4 source** [QLambda/Domain/Presheaf/instZeroCPMap.lean](#)

```
theorem choi_zero : (0 : CPMMap n m).choi = 0 := by
  exact KrausFamily.choi_nil
```

#### 4.4.1539 Zero element on carriers

**Definition.** Equip  $\text{Carrier } M \ N \ n$  with its canonical zero element.

**Construction.** Given by  $\langle \text{zero } M \ N \ n \rangle$ .

**Lean 4 source** [QLambda/Domain/Presheaf/instZeroDayCarrier.lean](#)

```
noncomputable instance instZeroDayCarrier (M N : Module.{0}) (n : Nat) : Zero (Carrier
  M N n) :=
  <zero M N n>
```

#### 4.4.1540 Zero element on raw Day coend expressions

**Definition.** Equip  $\text{Raw } M \ N \ n$  with its canonical zero element.

**Construction.** Given by  $\langle .\text{zero} \rangle$ .

**Lean 4 source** [QLambda/Domain/Presheaf/instZeroDayRaw.lean](#)

```
instance instZeroDayRaw {M N : Module.{0}} {n : Nat} : Zero (Raw M N n) :=
  <zero>
```



#### 4.4.1541 Zero element on carriers

**Definition.** Equip  $X.\text{Carrier}$  with its canonical zero element.

**Construction.** Given by  $\langle X.\text{zero} \rangle$ .

**Lean 4 source** [QLambda/Domain/Presheaf/instZeroFiberCarrier.lean](#)

```
instance instZeroFiberCarrier (X : Fiber) : Zero X.Carrier := <X.zero>
```

#### 4.4.1542 Zero element on module morphisms

**Definition.** Equip  $\text{Hom } M \ N$  with its canonical zero element.

**Construction.** Given by  $\langle \text{zero } M \ N \rangle$ .

**Lean 4 source** [QLambda/Domain/Presheaf/instZeroHom.lean](#)

```
instance instZeroHom (M : Module.{u}) (N : Module.{v}) : Zero (Hom M N) :=  
  <zero M N>
```

#### 4.4.1543 Zero element on superoperators

**Definition.** Equip  $\text{Superoperator } n \ m$  with its canonical zero element.

**Construction.** Given by  $\langle \text{zero} \rangle$ .

**Lean 4 source** [QLambda/Domain/Presheaf/instZeroSuperoperator.lean](#)

```
instance instZeroSuperoperator : Zero (Superoperator n m) := <zero>
```

#### 4.4.1544 Zero element on symmetric tensors

**Definition.** Equip  $\text{SymmetricElement } A \ k \ n$  with its canonical zero element.

**Construction.** The operations are given by:  $\text{zero}$  and  $\text{invariant}$ . Each required law follows from the corresponding property of the underlying data.

**Lean 4 source** [QLambda/Domain/Presheaf/instZeroSymmetricElement.lean](#)

```
instance instZeroSymmetricElement (A k n : Nat) : Zero (SymmetricElement A k n) where  
  zero :=  
    { val := 0  
      invariant := fun _sigma => Superoperator.comp_zero_right _ }
```

#### 4.4.1545 $\omega$ -completeness on superoperators

**Definition.** Equip  $\text{Superoperator } n \ m$  with its canonical  $\omega$ -completeness.

**Construction.** The operations are given by:  $\text{supremum}$  of an  $\omega$ -chain,  $\text{order supremum}$  of an  $\omega$ -chain and  $\text{supremum of an } \omega\text{-chain order}$ . Each required law follows from the corresponding property of the underlying data.

**Lean 4 source** [QLambda/Domain/Presheaf/omegaComplete.lean](#)

```

noncomputable instance omegaComplete {n m : Nat} :
  QLambda.Domain.OmegaComplete (Superoperator n m) where
  ?Sup := omegaSup
  le_?Sup := le_omegaSup
  ?Sup_le := omegaSup_le

```

#### 4.4.1546 The superoperator equals an $\omega$ -chain supremum, assuming limit

**Statement.** For natural numbers  $n, m$ , a superoperator  $y$ : if  $c$  is monotone; for every  $N$ ,  $c \ N \leq y$ ; and  $\text{fun } N \Rightarrow (c \ N).cp.choi$  converges along  $\text{Filter.atTop}$  to  $\text{nhds } y.cp.choi$ , then  $y$  equals the supremum of an  $\omega$ -chain of  $c$  and  $hc$ .

**Proof.** Equality is proved by showing both inequalities. The key step rewrites with the characterization of the order for subnormalized density matrices, antisymmetry of the order and the fact that the positive cone of finite complex matrices is sequentially closed.

#### Lean 4 source `QLambda/Domain/Presheaf/omegaComplete.lean`

```

theorem eq_omegaSup_of_tendsto {n m : Nat}
  (c : Nat -> Superoperator n m) (hc : Monotone c)
  (y : Superoperator n m) (hy : forall N, c N <= y)
  (ht : Filter.Tendsto (fun N => (c N).cp.choi) Filter.atTop
    (nhds y.cp.choi)) :
  y = QLambda.Domain.OmegaComplete.?Sup c hc := by
  let s := QLambda.Domain.OmegaComplete.?Sup c hc
  apply le_antisymm
  * change y.cp.choi <= s.cp.choi
    rw [Matrix.le_iff]
    have hpos (N : Nat) :
      (s.cp.choi - (c N).cp.choi).PosSemidef :=
      Matrix.le_iff.mp
      (QLambda.Domain.OmegaComplete.le_?Sup c hc N)
    exact posSemidef_of_tendsto
      (fun N => s.cp.choi - (c N).cp.choi)
      (s.cp.choi - y.cp.choi) hpos
      (tendsto_const_nhds.sub ht)
  * exact QLambda.Domain.OmegaComplete.?Sup_le c hc y hy

```

#### 4.4.1547 Composition of an $\omega$ -chain supremum for superoperators, in the left argument

**Statement.** For natural numbers  $n, m, l$ , a superoperator  $g$ : if  $c$  is monotone, then the composite of the supremum of an  $\omega$ -chain of  $c$  and  $hc$  after  $g$  equals the supremum of an  $\omega$ -chain of  $\text{fun } N \Rightarrow \text{comp } (c \ N) \ g$  and  $(\text{comp\_mono\_left } g).comp \ hc$ .

**Proof.** It follows from the fact that the superoperator equals an  $\omega$ -chain supremum, assuming limit, the monotonicity of the composition of the monotonicity and the Choi matrix composition limit left.

#### Lean 4 source `QLambda/Domain/Presheaf/omegaComplete.lean`

```

theorem comp_omegaSup_left {n m l : Nat}
  (c : Nat -> Superoperator m l) (hc : Monotone c)
  (g : Superoperator n m) :
  comp (QLambda.Domain.OmegaComplete.?Sup c hc) g =

```

```

      QLambda.Domain.OmegaComplete.?Sup (fun N => comp (c N) g)
      ((comp_mono_left g).comp hc) := by
apply eq_omegaSup_of_tendsto
* intro N
  exact comp_mono_left g
      (QLambda.Domain.OmegaComplete.le_?Sup c hc N)
* exact choi_comp_tendsto_left c hc g

```

#### 4.4.1548 Composition of an $\omega$ -chain supremum for superoperators, in the right argument

**Statement.** For natural numbers  $n, m, l$ , a superoperator  $f$ : if  $c$  is monotone, then the composite of  $f$  after the supremum of an  $\omega$ -chain of  $c$  and  $hc$  equals the supremum of an  $\omega$ -chain of  $\text{fun } N \Rightarrow \text{comp } f \ (c \ N)$  and  $(\text{comp\_mono\_right } f).\text{comp } hc$ .

**Proof.** It follows from the fact that the superoperator equals an  $\omega$ -chain supremum, assuming limit, the monotonicity of the composition of the monotonicity and the Choi matrix composition limit right.

#### Lean 4 source `QLambda/Domain/Presheaf/omegaComplete.lean`

```

theorem comp_omegaSup_right {n m l : Nat}
  (f : Superoperator m l) (c : Nat -> Superoperator n m)
  (hc : Monotone c) :
  comp f (QLambda.Domain.OmegaComplete.?Sup c hc) =
    QLambda.Domain.OmegaComplete.?Sup (fun N => comp f (c N))
    ((comp_mono_right f).comp hc) := by
apply eq_omegaSup_of_tendsto
* intro N
  exact comp_mono_right f
      (QLambda.Domain.OmegaComplete.le_?Sup c hc N)
* exact choi_comp_tendsto_right f c hc

```

#### 4.4.1549 Equivalence relation on terms

**Definition.** Equip  $\text{Term } M \ N \ n$  with its canonical equivalence relation.

**Construction.** The operations are given by:  $r$  and  $\text{iseqv}$ . Each required law follows from the corresponding property of the underlying data.

#### Lean 4 source `QLambda/Domain/Presheaf/setoid.lean`

```

instance setoid (M N : Module) (n : Nat) : Setoid (Term M N n) where
  r := Equivalent
  iseqv := by
    constructor
    * intro t L b
      rfl
    * intro s t h L b
      exact (h L b).symm
    * intro r s t hrs hst L b
      exact (hrs L b).trans (hst L b)

```

#### 4.4.1550 Carrier of the Day coend at $n$

**Definition.** Carrier of the Day coend at  $n$ .

**Construction.** Defined to be the quotient of the setoid of  $M, N, n$ .

**Lean 4 source** [QLambda/Domain/Presheaf/setoid.lean](#)

```
abbrev Carrier (M N : Module) (n : Nat) :=  
  Quotient (Term.setoid M N n)
```

#### 4.4.1551 Definition of the evaluation of Day coends

**Definition.** The evaluation of  $L$  and  $\beta$  is a function of type  $\text{Carrier } M \ N \ n \rightarrow (L.\text{obj } n) . \text{Carrier}$ .

**Construction.** Defined to be the lift of  $\text{fun } t \Rightarrow t.\text{value } L \ \beta$  and  $\text{fun } \_ \_ h \Rightarrow h \ L \ \beta$ .

**Lean 4 source** [QLambda/Domain/Presheaf/setoid.lean](#)

```
noncomputable def evaluate {M N : Module} {n : Nat}  
  (L : Module) (b : Bilinear M N L) :  
  Carrier M N n  $\rightarrow$  (L.obj n).Carrier :=  
  Quotient.lift (fun t => t.value L b) (fun _ _ h => h L b)
```

#### 4.4.1552 Definition of the zero term of Day coends

**Definition.** The zero term of  $M, N$  and  $n$  is a term.

**Construction.** Constructed by supplying each component of the structure explicitly.

**Lean 4 source** [QLambda/Domain/Presheaf/setoid.lean](#)

```
noncomputable def zeroTerm (M N : Module.{0}) (n : Nat) : Term M N n :=  
  <.zero, Raw.admissible_zero, trivial>
```

#### 4.4.1553 Definition of the Day coend of zero

**Definition.** The zero of  $M, N$  and  $n$  is an element of  $\text{Carrier } M \ N \ n$ .

**Construction.** Defined to be the construction of  $\_$  and the zero term of  $M, N, n$ .

**Lean 4 source** [QLambda/Domain/Presheaf/setoid.lean](#)

```
noncomputable def zero (M N : Module.{0}) (n : Nat) : Carrier M N n :=  
  Quotient.mk _ (zeroTerm M N n)
```

#### 4.4.1554 Pointwise supremum of an increasing chain of maps into the tensor unit

**Definition.** Pointwise supremum of an increasing chain of maps into the tensor unit.

**Construction.** Constructed by supplying each component: application, functorial action zero, functorial action sum and naturality. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/Presheaf/unitHomOmegaComplete.lean](#)

```

noncomputable def unitHomOmegaSup (P : Module)
  (c : Nat -> Hom P dayTensorUnit) (hc : Monotone c) :
  Hom P dayTensorUnit where
app := fun n x =>
  Superoperator.omegaSup
    (fun k => (show Superoperator n 1 from (c k)).app n x))
    (fun _ _ h => hc h n x)
map_zero := by
  intro n
  let d : Nat -> Superoperator n 1 := fun k => (c k).app n 0
  have hd : forall k, d k = 0 := fun k => (c k).map_zero n
  change Superoperator.omegaSup d _ = 0
  apply le_antisymm
  * apply QLambda.Domain.OmegaComplete.?Sup_le
    intro k
    rw [hd]
  * exact bot_le
map_sum := by
  intro ? _ n f s h
  exact SigmaMon.ChoiSum.hasSum_omegaSup
    (fun k i => (c k).app n (f i))
    (fun k => (c k).app n s)
    (fun i _ _ hk => hc hk n (f i))
    (fun _ _ hk => hc hk n s)
    (fun k => (c k).map_sum h)
naturalty := by
  intro m n x f
  dsimp [dayTensorUnit, representable]
  rw (config := { transparency := .default }) [Superoperator.comp_omegaSup_left]
  apply le_antisymm
  * apply Superoperator.omegaSup_le
    intro k
    have hk := (c k).naturalty x f
    dsimp [dayTensorUnit, representable] at hk
    rw [hk]
    exact Superoperator.le_omegaSup
      (fun r => Superoperator.comp ((c r).app n x) f) _ k
  * apply Superoperator.omegaSup_le
    intro k
    have hk := (c k).naturalty x f
    dsimp [dayTensorUnit, representable] at hk
    rw [hk]
    exact Superoperator.le_omegaSup
      (fun r => (c r).app m (P.act x f)) _ k

```

#### 4.4.1555 Precomposition is monotone for the pointwise Choi order

**Definition.** Precomposition is monotone for the pointwise Choi order.

**Construction.** The operations are given by: supremum of an  $\omega$ -chain. Each required law follows from the corresponding property of the underlying data.

**Lean 4 source** [QLambda/Domain/Presheaf/unitHomOmegaComplete.lean](#)

```

noncomputable instance unitHomOmegaComplete (P : Module) :

```

```

    QLambda.Domain.OmegaComplete (Hom P dayTensorUnit) where
?Sup := unitHomOmegaSup P
le_?Sup c hc k n x :=
    QLambda.Domain.OmegaComplete.le_?Sup
    (fun r =>
        (show Superoperator n 1 from (c r).app n x))
    (fun _ _ h => hc h n x) k
?Sup_le c hc f hf n x :=
    QLambda.Domain.OmegaComplete.?Sup_le
    (fun r =>
        (show Superoperator n 1 from (c r).app n x))
    (fun _ _ h => hc h n x)
    (show Superoperator n 1 from f.app n x)
    (fun k => hf k n x)

```

#### 4.4.1556 Least element on module morphisms

**Definition.** Equip  $\text{Hom } P \text{ dayTensorUnit}$  with its canonical least element.

**Construction.** The operations are given by: bottom element. Each required law follows from the corresponding property of the underlying data.

**Lean 4 source** [QLambda/Domain/Presheaf/unitHomOrderBot.lean](#)

```

noncomputable instance unitHomOrderBot (P : Module) :
    OrderBot (Hom P dayTensorUnit) where
bot := 0
bot_le f := by
    intro n x
    exact bot_le

```

#### 4.4.1557 The pointwise Choi relation before it is bundled as an order

**Definition.** The pointwise Choi relation before it is bundled as an order.

**Construction.** Defined by an explicit formula built from the superoperator and the application.

**Lean 4 source** [QLambda/Domain/Presheaf/unitHomPartialOrder.lean](#)

```

def UnitHomLE (P : Module) (f g : Hom P dayTensorUnit) : Prop :=
    forall n x,
        (show Superoperator n 1 from f.app n x) <=
            (show Superoperator n 1 from g.app n x)

```

#### 4.4.1558 Partial order on module morphisms

**Definition.** Equip  $\text{Hom } P \text{ dayTensorUnit}$  with its canonical partial order.

**Construction.** The operations are given by: order. Each required law follows from the corresponding property of the underlying data.

**Lean 4 source** [QLambda/Domain/Presheaf/unitHomPartialOrder.lean](#)

```

noncomputable instance unitHomPartialOrder (P : Module) :
  PartialOrder (Hom P dayTensorUnit) where
  le := UnitHomLE P
  le_refl _ _ _ := le_refl
  le_trans _ _ _ hfg hgh n x := (hfg n x).trans (hgh n x)
  le_antisymm f g hfg hgf := by
    apply Hom.ext
    intro n x
    change
      (show Superoperator n 1 from f.app n x) =
        (show Superoperator n 1 from g.app n x)
    exact le_antisymm (hfg n x) (hgf n x)

```

#### 4.4.1559 An inverse chain of complete lattices

**Definition.** An inverse chain of complete lattices. The projection maps preserve all infima and suprema; in particular they preserve  $\omega$ -chain limits.

**Construction.** An element consists of `Stage`, `complete` and `project`.

##### Lean 4 source `QLambda/Domain/ProjectionChain.lean`

```

structure ProjectionChain where
  Stage : Nat -> Type u
  complete : forall n, CompleteLattice (Stage n)
  project : forall n, CompleteLatticeHom (Stage (n + 1)) (Stage n)

```

#### 4.4.1560 Compatibility equations for a sequence of approximants

**Definition.** Compatibility equations for a sequence of approximants.

**Construction.** Defined to be  $\forall n, C.\text{project } n (x (n + 1)) = x n$ .

##### Lean 4 source `QLambda/Domain/ProjectionChain.lean`

```

def Compatible (x : forall n, C.Stage n) : Prop :=
  forall n, C.project n (x (n + 1)) = x n

```

#### 4.4.1561 Compatible of the supremum for projection chains

**Statement.** If  $s \subseteq \{x \mid C.\text{Compatible } x\}$ , then  $C.\text{Compatible } (s\text{Sup } s)$ .

**Proof.** The key step rewrites with the hypothesis that  $s \subseteq \{x \mid C.\text{Compatible } x\}$ .

##### Lean 4 source `QLambda/Domain/ProjectionChain.lean`

```

private theorem compatible_sSup {s : Set (forall n, C.Stage n)}
  (hs : s subseteq {x \mid C.Compatible x}) :
  C.Compatible (sSup s) := by
  intro n
  simp only [sSup_eq_iSup, iSup_apply]
  rw [map_iSup]
  apply iSup_congr
  intro x

```

```

rw [map_iSup]
apply iSup_congr
intro hx
exact hs hx n

```

#### 4.4.1562 Compatible of the infimum for projection chains

**Statement.** If  $s \subseteq \{x \mid C.\text{Compatible } x\}$ , then  $C.\text{Compatible } (\text{sInf } s)$ .

**Proof.** The key step rewrites with the hypothesis that  $s \subseteq \{x \mid C.\text{Compatible } x\}$ .

##### Lean 4 source `QLambda/Domain/ProjectionChain.lean`

```

private theorem compatible_sInf {s : Set (forall n, C.Stage n)}
  (hs : s ⊆ {x | C.Compatible x}) :
  C.Compatible (sInf s) := by
  intro n
  simp only [sInf_eq_iInf, iInf_apply]
  rw [map_iInf]
  apply iInf_congr
  intro x
  rw [map_iInf]
  apply iInf_congr
  intro hx
  exact hs hx n

```

#### 4.4.1563 Compatible sequences form a complete sublattice of the pointwise function lattice

**Definition.** Compatible sequences form a complete sublattice of the pointwise function lattice.

**Construction.** Defined to be the construction (variant) of  $\{x \mid C.\text{Compatible } x\}$ ,  $\text{fun } _ \text{ hs} \Rightarrow C.\text{compatible\_sSup } \text{hs}$ ,  $\text{fun } _ \text{ hs} \Rightarrow C.\text{compatible\_sInf } \text{hs}$ .

##### Lean 4 source `QLambda/Domain/ProjectionChain.lean`

```

def compatibleSublattice : CompleteSublattice (forall n, C.Stage n) :=
  CompleteSublattice.mk' {x | C.Compatible x}
  (fun _ hs => C.compatible_sSup hs)
  (fun _ hs => C.compatible_sInf hs)

```

#### 4.4.1564 The bilimit carrier of the projection chain

**Definition.** The bilimit carrier of the projection chain.

**Construction.** Defined to be the compatible sublattice of  $C$ .

##### Lean 4 source `QLambda/Domain/ProjectionChain.lean`

```

abbrev Bilimit : Type u :=
  C.compatibleSublattice

```



#### 4.4.1565 The $n$ th finite approximation of a bilimit element

**Definition.** The  $n$ th finite approximation of a bilimit element.

**Construction.** The map sending  $x$  to the 1 of  $n$ .

**Lean 4 source** [QLambda/Domain/ProjectionChain.lean](#)

```
def projection (n : Nat) : C.Bilimit -> C.Stage n :=
  fun x => x.1 n
```

#### 4.4.1566 Projection of the compatible for projection chains

**Statement.** For a natural number  $n$ : the project of  $n$  and the projection of  $n + 1$  and  $x$  equals the projection of  $n$  and  $x$ .

**Proof.** The claim follows directly from the definitions of the objects involved.

**Lean 4 source** [QLambda/Domain/ProjectionChain.lean](#)

```
@[simp] theorem projection_compatible (x : C.Bilimit) (n : Nat) :
  C.project n (C.projection (n + 1) x) = C.projection n x :=
  by
    have hx : C.Compatible x := x.2
    exact hx n
```

#### 4.4.1567 The bilimit is automatically a pointed $\omega$ CPO because it is a complete lattice

**Definition.** The bilimit is automatically a pointed  $\omega$ CPO because it is a complete lattice.

**Construction.** Constructed by supplying each component: carrier, partial order and  $\omega$ -completeness. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/ProjectionChain.lean](#)

```
noncomputable def bilimitOmegaObject : OmegaObject where
  Carrier := C.Bilimit
  partialOrder := inferInstance
  omegaComplete := inferInstance
```

#### 4.4.1568 Equality is determined by all finite approximants

**Statement.** Equality is determined by all finite approximants. Formally:  $x = y$ .

**Proof.** Both sides are compared pointwise (by extensionality). It follows from the hypothesis that for every  $n$ ,  $C.projection\ n\ x = C.projection\ n\ y$ .

**Lean 4 source** [QLambda/Domain/ProjectionChain.lean](#)

```
theorem ext {x y : C.Bilimit}
  (h : forall n, C.projection n x = C.projection n y) : x = y := by
  apply Subtype.ext
  funext n
  exact h n
```

#### 4.4.1569 The tail chain drops the zeroth approximation

**Definition.** The tail chain drops the zeroth approximation.

**Construction.** Constructed by supplying each component of the structure explicitly.

**Lean 4 source** [QLambda/Domain/ProjectionChain.lean](#)

```
abbrev tail : ProjectionChain where
  Stage n := C.Stage (n + 1)
  complete n := C.complete (n + 1)
  project n := C.project (n + 1)
```

#### 4.4.1570 Unfold a compatible chain by dropping its zeroth approximation

**Definition.** Unfold a compatible chain by dropping its zeroth approximation.

**Construction.** Constructed by supplying each component of the structure explicitly.

**Lean 4 source** [QLambda/Domain/ProjectionChain.lean](#)

```
def shiftForward (x : C.Bilimit) : C.tail.Bilimit :=
  <fun n => x.1 (n + 1), fun n => x.2 (n + 1)>
```

#### 4.4.1571 Fold a tail-compatible chain by restoring the uniquely determined zeroth approximation

**Definition.** Fold a tail-compatible chain by restoring the uniquely determined zeroth approximation.

**Construction.** Constructed by supplying each component: property. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/ProjectionChain.lean](#)

```
def shiftBackward (x : C.tail.Bilimit) : C.Bilimit where
  val
    | 0 => C.project 0 (x.1 0)
    | n + 1 => x.1 n
  property := by
    intro n
    cases n with
    | zero => rfl
    | succ n => exact x.2 n
```

#### 4.4.1572 Forward index shift of the backward index shift for projection chains

**Statement.** The forward index shift of the backward index shift of  $x$  equals  $x$ .

**Proof.** Both sides are compared pointwise (by extensionality). It follows from the fact that equality is determined by all finite approximants.

**Lean 4 source** [QLambda/Domain/ProjectionChain.lean](#)

```
@[simp] theorem shiftForward_shiftBackward (x : C.tail.Bilimit) :
  C.shiftForward (C.shiftBackward x) = x := by
  apply C.tail.ext
```

```
intro n
rfl
```

#### 4.4.1573 Backward index shift of the forward index shift for projection chains

**Statement.** The backward index shift of the forward index shift of  $x$  equals  $x$ .

**Proof.** By case analysis on  $n$ . For zero, the claim is checked directly; the case of a successor is immediate. It follows from the fact that equality is determined by all finite approximants.

**Lean 4 source** [QLambda/Domain/ProjectionChain.lean](#)

```
@[simp] theorem shiftBackward_shiftForward (x : C.Bilimit) :
  C.shiftBackward (C.shiftForward x) = x := by
  apply C.ext
  intro n
  cases n with
  | zero => exact x.2 0
  | succ n => rfl
```

#### 4.4.1574 Dropping the zeroth approximation is $\omega$ -continuous

**Definition.** Dropping the zeroth approximation is  $\omega$ -continuous.

**Construction.** Constructed by supplying each component: passage to fun and monotonicity. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/ProjectionChain.lean](#)

```
noncomputable def shiftForwardMap :
  OmegaMap C.bilimitOmegaObject C.tail.bilimitOmegaObject where
  toFun := C.shiftForward
  monotone := by
    intro x y h
    exact fun n => h (n + 1)
  map_?Sup c hc := by
    change (Nat -> C.Bilimit) at c
    change C.shiftForward (bigcup k, c k) =
      bigcup k, C.shiftForward (c k)
    apply C.tail.ext
    intro n
    simp only [projection, shiftForward, CompleteSublattice.coe_iSup]
    rw [iSup_apply, iSup_apply]
```

#### 4.4.1575 Restoring the uniquely determined zeroth approximation is $\omega$ -continuous

**Definition.** Restoring the uniquely determined zeroth approximation is  $\omega$ -continuous.

**Construction.** Constructed by supplying each component: passage to fun and monotonicity. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/ProjectionChain.lean](#)

```

noncomputable def shiftBackwardMap :
  OmegaMap C.tail.bilimitOmegaObject C.bilimitOmegaObject where
toFun := C.shiftBackward
monotone := by
  intro x y h n
  cases n with
  | zero =>
    have hxy : x.1 0 sqsup y.1 0 = y.1 0 :=
      sup_eq_right.mpr (h 0)
    calc
      C.project 0 (x.1 0) <=
        C.project 0 (x.1 0) sqsup C.project 0 (y.1 0) := le_sup_left
    _ = C.project 0 (x.1 0 sqsup y.1 0) :=
      (map_sup (C.project 0) _ _).symm
    _ = C.project 0 (y.1 0) :=
      congrArg (C.project 0) hxy
  | succ n => exact h n
map_?Sup c hc := by
  change (Nat -> C.tail.Bilimit) at c
  change C.shiftBackward (bigcup k, c k) =
    bigcup k, C.shiftBackward (c k)
  apply C.ext
  intro n
  cases n with
  | zero =>
    simp only [projection, shiftBackward, CompleteSublattice.coe_iSup]
    rw [iSup_apply, iSup_apply]
    simp only
    simp [tail]
  | succ n =>
    simp only [projection, shiftBackward, CompleteSublattice.coe_iSup]
    rw [iSup_apply, iSup_apply]

```

#### 4.4.1576 Every projection-chain bilimit is continuously isomorphic to the bilimit of its tail

**Definition.** Every projection-chain bilimit is continuously isomorphic to the bilimit of its tail. These are the generic fold/unfold maps used by strictly-positive recursive-object chains.

**Construction.** Constructed by supplying each component: morphism, inverse, morphism inverse and inverse morphism. The accompanying laws are verified from the definitions.

#### Lean 4 source `QLambda/Domain/ProjectionChain.lean`

```

noncomputable def shiftIso :
  OmegaCategory.Iso omegaMapCategory
  C.bilimitOmegaObject C.tail.bilimitOmegaObject where
hom := C.shiftForwardMap
inv := C.shiftBackwardMap
hom_inv := by
  apply OmegaMap.ext
  intro x
  exact C.shiftForward_shiftBackward x
inv_hom := by
  apply OmegaMap.ext
  intro x

```

```
exact C.shiftBackward_shiftForward x
```

#### 4.4.1577 A quantum set with decidable atoms, packaged as a linear object

**Definition.** A quantum set with decidable atoms, packaged as a linear object.

**Construction.** An element consists of `set`.

**Lean 4 source** [QLambda/Domain/QObj.lean](#)

```
structure QObj where
  set : QuantumSet
  [decidable : DecidableEq set.Atom]
```

#### 4.4.1578 Definition of the quantum object of the qubit

**Definition.** The qubit is a quantum object.

**Construction.** Constructed by supplying each component of the structure explicitly.

**Lean 4 source** [QLambda/Domain/QObj.lean](#)

```
def qubit : QObj := <.qubit>
```

#### 4.4.1579 Definition of the quantum object of the bit

**Definition.** The bit is a quantum object.

**Construction.** Constructed by supplying each component of the structure explicitly.

**Lean 4 source** [QLambda/Domain/QObj.lean](#)

```
def bit : QObj := <.bit>
```

#### 4.4.1580 Definition of the quantum object of the unit

**Definition.** The unit is a quantum object.

**Construction.** Constructed by supplying each component of the structure explicitly.

**Lean 4 source** [QLambda/Domain/QObj.lean](#)

```
def unit : QObj := <.unit>
```

#### 4.4.1581 Definition of the tensor product of quantum objects

**Definition.** The tensor product of  $X$  and  $Y$  is a quantum object.

**Construction.** Constructed by supplying each component: `set` and `decidable`. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/QObj.lean](#)

```
def tensor (X Y : QObj) : QObj where
  set := X.set.tensor Y.set
  decidable := inferInstanceAs (DecidableEq (X.set.Atom x Y.set.Atom))
```

#### 4.4.1582 Definition of the dual of quantum objects

**Definition.** The dual of  $X$  is a quantum object.

**Construction.** Constructed by supplying each component: set and decidable. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/QObj.lean](#)

```
def dual (X : QObj) : QObj where
  set := X.set.dual
  decidable := inferInstanceAs (DecidableEq X.set.Atom)
```

#### 4.4.1583 Definition of the construction from a poset of quantum objects

**Definition.** The construction from a poset of  $P$  is a quantum object.

**Construction.** Constructed by supplying each component: set. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/QObj.lean](#)

```
def ofPoset (P : QuantumPoset) : QObj where
  set := P.carrier
```

#### 4.4.1584 A quantum CPO: a quantum poset satisfying the atomic-probe completeness condition

**Definition.** A quantum CPO: a quantum poset satisfying the atomic-probe completeness condition.

**Construction.** An element consists of poset and complete.

**Lean 4 source** [QLambda/Domain/QuantumCPO.lean](#)

```
structure QuantumCPO where
  poset : QuantumPoset
  complete : IsQuantumCPO poset
```

#### 4.4.1585 Definition of the discrete of quantum CPOs

**Definition.** The discrete of  $X$  is a quantum CPO.

**Construction.** Constructed by supplying each component: poset and completeness. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/QuantumCPO.lean](#)

```
def discrete (X : QuantumSet) [DecidableEq X.Atom] : QuantumCPO where
  poset := .discrete X
  complete := discrete_isQuantumCPO X
```

#### 4.4.1586 Definition of the quantum CPO of the qubit

**Definition.** The qubit is a quantum CPO.

**Construction.** Constructed by supplying each component of the structure explicitly.

**Lean 4 source** [QLambda/Domain/QuantumCPO.lean](#)

```
def qubit : QuantumCPO := <.qubit, qubit_isQuantumCPO>
```

#### 4.4.1587 Definition of the quantum CPO of the bit

**Definition.** The bit is a quantum CPO.

**Construction.** Constructed by supplying each component of the structure explicitly.

**Lean 4 source** [QLambda/Domain/QuantumCPO.lean](#)

```
def bit : QuantumCPO := <.bit, bit_isQuantumCPO>
```

#### 4.4.1588 Definition of the quantum CPO of the unit

**Definition.** The unit is a quantum CPO.

**Construction.** Constructed by supplying each component of the structure explicitly.

**Lean 4 source** [QLambda/Domain/QuantumCPO.lean](#)

```
def unit : QuantumCPO := <.unit, unit_isQuantumCPO>
```

#### 4.4.1589 Theorem 3.3.5: quantum CPOs and Scott-continuous quantum functions form an $\omega$ CPO-enriched category

**Definition.** Theorem 3.3.5: quantum CPOs and Scott-continuous quantum functions form an  $\omega$ CPO-enriched category.

**Construction.** Constructed by supplying each component: obj, partial order,  $\omega$ -completeness, identity, composition, composite monotonicity left, composite monotonicity right and composite supremum of an  $\omega$ -chain left, among others. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/QuantumCPOCategory.lean](#)

```
noncomputable def qCPOCategory : OmegaCategory.{1, 0} where
  Obj := QuantumCPO
  hom P Q :=
    { Carrier := ScottFunction P Q
      partialOrder := inferInstance
      omegaComplete := ScottFunction.instOmegaComplete P Q }
  id := fun {P} => ScottFunction.id P
  comp := ScottFunction.comp
  comp_mono_left := ScottFunction.comp_mono_left
  comp_mono_right := ScottFunction.comp_mono_right
  comp_?Sup_left := ScottFunction.comp_?Sup_left
  comp_?Sup_right := ScottFunction.comp_?Sup_right
```

```

id_comp := ScottFunction.id_comp
comp_id := ScottFunction.comp_id
assoc := ScottFunction.assoc

```

#### 4.4.1590 Hom-object of quantum relations, as a pointed $\omega$ CPO

**Definition.** Hom-object of quantum relations, as a pointed  $\omega$ CPO.

**Construction.** Constructed by supplying each component: carrier, partial order and  $\omega$ -completeness. The accompanying laws are verified from the definitions.

#### Lean 4 source `QLambda/Domain/QuantumCategory.lean`

```

noncomputable def qRelHom (X Y : QObj) : OmegaObject where
  Carrier := QuantumRel X.set Y.set
  partialOrder := inferInstance
  omegaComplete := inferInstance

```

#### 4.4.1591 The $\omega$ CPO-enriched category of quantum sets and quantum relations

**Definition.** The  $\omega$ CPO-enriched category of quantum sets and quantum relations.

**Construction.** Constructed by supplying each component: obj, morphism, identity, composition, composite monotonicity left, composite monotonicity right, composite supremum of an  $\omega$ -chain left and composite supremum of an  $\omega$ -chain right, among others. The accompanying laws are verified from the definitions.

#### Lean 4 source `QLambda/Domain/QuantumCategory.lean`

```

noncomputable def qRelCategory : OmegaCategory where
  Obj := QObj
  hom := qRelHom
  id := fun {X} => QuantumRel.id X.set
  comp := fun {X Y Z} S R => S.comp R
  comp_mono_left := fun {X Y Z} R => by
    intro S_1 S_2 h
    exact QuantumRel.comp_mono_left (X := X.set) (Y := Y.set) (Z := Z.set) R h
  comp_mono_right := fun {X Y Z} S => by
    intro R_1 R_2 h
    exact QuantumRel.comp_mono_right (X := X.set) (Y := Y.set) (Z := Z.set) h
  comp_?Sup_left := fun {X Y Z} c hc R => by
    change (bigcup n, c n).comp R = bigcup n, (c n).comp R
    exact QuantumRel.comp_iSup_left (Y := Y.set) (Z := Z.set) c R
  comp_?Sup_right := fun {X Y Z} S c hc => by
    change S.comp (bigcup n, c n) = bigcup n, S.comp (c n)
    exact QuantumRel.comp_iSup_right (X := X.set) (Y := Y.set) S c
  id_comp := fun {X Y} R => QuantumRel.id_comp (X := X.set) (Y := Y.set) R
  comp_id := fun {X Y} R => QuantumRel.comp_id (X := X.set) (Y := Y.set) R
  assoc := fun {X Y Z W} T S R =>
    QuantumRel.assoc (X := X.set) (Y := Y.set) (Z := Z.set) (W := W.set) T S R

```



#### 4.4.1592 Relations out of the monoidal unit form a pointed $\omega$ CPO

**Definition.** Relations out of the monoidal unit form a pointed  $\omega$ CPO.

**Construction.** Defined to be the quantum rel morphism of the unit and A.

**Lean 4 source** [QLambda/Domain/QuantumCategory.lean](#)

```
noncomputable def states (A : QObj) : OmegaObject :=
  qRelHom QObj.unit A
```

#### 4.4.1593 Reinterpret a relation quantum set of a classical set of D and A as a function $D \rightarrow \mathbf{Rel}(I, A)$

**Definition.** Reinterpret a relation  $\text{liftSet } D \rightarrow A$  as a function  $D \rightarrow \mathbf{Rel}(I, A)$ .

**Construction.** The map sending  $x$  to  $\{ \text{component} := \text{fun } \_ \ a \Rightarrow R.\text{component } x \ a \}$ .

**Lean 4 source** [QLambda/Domain/QuantumCategory.lean](#)

```
def relToStateFun {D : Type} [DecidableEq D] {A : QObj}
  (R : QuantumRel (.liftSet D) A.set) :
  D -> QuantumRel .unit A.set :=
fun x =>
  { component := fun _ a => R.component x a }
```

#### 4.4.1594 Reassemble a family of states into a relation out of quantum set of a classical set of D

**Definition.** Reassemble a family of states into a relation out of  $\text{liftSet } D$ .

**Construction.** Constructed by supplying each component:  $\text{component}$ . The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/QuantumCategory.lean](#)

```
def stateFunToRel {D : Type} [DecidableEq D] {A : QObj}
  (f : D -> QuantumRel .unit A.set) :
  QuantumRel (.liftSet D) A.set where
  component := fun x a => (f x).component PUnit.unit a
```

#### 4.4.1595 Rel to state fun of a state fun to rel

**Statement.** The rel to state fun of the state fun to rel of  $f$  equals  $f$ .

**Proof.** Both sides are compared pointwise (by extensionality). The hypotheses are unpacked into their constituent data. It follows from the extensionality for quantum relations.

**Lean 4 source** [QLambda/Domain/QuantumCategory.lean](#)

```
theorem relToStateFun_stateFunToRel {D : Type} [DecidableEq D] {A : QObj}
  (f : D -> QuantumRel .unit A.set) :
  relToStateFun (stateFunToRel f) = f := by
  funext x
  apply QuantumRel.ext
```

```

intro u a
cases u
rfl

```

#### 4.4.1596 State fun to rel of a rel to state fun

**Statement.** For a quantum relation  $R$ : the state fun to rel of the rel to state fun of  $R$  equals  $R$ .

**Proof.** Both sides are compared pointwise (by extensionality). It follows from the extensionality for quantum relations.

**Lean 4 source** `QLambda/Domain/QuantumCategory.lean`

```

theorem stateFunToRel_relToStateFun {D : Type} [DecidableEq D] {A : QObj}
  (R : QuantumRel (.liftSet D) A.set) :
  stateFunToRel (relToStateFun R) = R := by
  apply QuantumRel.ext
  intro x a
  rfl

```

#### 4.4.1597 The span of one of one equals the top element

**Statement.** The span of  $\mathbb{C}$  and  $\{(1 : \text{Matrix } (\text{Fin } 1) (\text{Fin } 1) \mathbb{C})\}$  equals  $\top$ .

**Proof.** Both sides are compared pointwise (by extensionality). Each component of the claim is established separately. An equation between variables is used to substitute one for the other. The goal is simplified using standard identities for submodules.

**Lean 4 source** `QLambda/Domain/QuantumClassical.lean`

```

private theorem span_one_one_eq_top :
  Submodule.span ?
    {(1 : Matrix (Fin 1) (Fin 1) ?)} = top := by
  apply top_unique
  intro m hm
  apply Submodule.mem_span_singleton.mpr
  refine <m 0 0, ?_>
  ext i j
  have hi : i = 0 := Subsingleton.elim _ _
  have hj : j = 0 := Subsingleton.elim _ _
  subst i
  subst j
  simp

```

#### 4.4.1598 Graph of an ordinary function as a relation between classical quantum sets

**Definition.** Graph of an ordinary function as a relation between classical quantum sets.

**Construction.** Constructed by supplying each component of the structure explicitly.

**Lean 4 source** `QLambda/Domain/QuantumClassical.lean`

```

noncomputable def graph {A B : Type}
  (f : (QuantumSet.liftSet A).Atom -> (QuantumSet.liftSet B).Atom) :
  QuantumRel (.liftSet A) (.liftSet B) where
component x y :=
  @ite _ (f x = y) (Classical.propDecidable _)
  (Submodule.span ? {(1 : Matrix (Fin 1) (Fin 1) ?)}) False

```

#### 4.4.1599 Formula for the graph of the component

**Statement.**  $(\text{graph } f).\text{component } x (f x) = \top$ . Formally:  $(\text{graph } f).\text{component } x (f x) = \top$ .

**Proof.** The goal is simplified using the definition of the graph and the fact that the span of one of one equals the top element.

#### Lean 4 source `QLambda/Domain/QuantumClassical.lean`

```

@[simp] theorem graph_component_eq {A B : Type}
  (f : (QuantumSet.liftSet A).Atom -> (QuantumSet.liftSet B).Atom)
  (x : (QuantumSet.liftSet A).Atom) :
  (graph f).component x (f x) = top := by
classical
simp only [graph, reduceIte]
exact span_one_one_eq_top

```

#### 4.4.1600 The graph of the component is nonzero

**Statement.** If  $f x \neq y$ , then  $(\text{graph } f).\text{component } x y = \perp$ . Formally:  $(\text{graph } f).\text{component } x y = \perp$ .

**Proof.** The goal is simplified using the definition of the graph and the hypothesis that  $f x \neq y$ .

#### Lean 4 source `QLambda/Domain/QuantumClassical.lean`

```

@[simp] theorem graph_component_ne {A B : Type}
  (f : (QuantumSet.liftSet A).Atom -> (QuantumSet.liftSet B).Atom)
  (x : (QuantumSet.liftSet A).Atom)
  (y : (QuantumSet.liftSet B).Atom) (h : f x != y) :
  (graph f).component x y = False := by
classical
simp only [graph, h, reduceIte]

```

#### 4.4.1601 Graph of the identity for quantum relations

**Statement.** The graph of a of  $:=$  and  $A$ , the Boolean of  $:=$  and  $A$ ,  $\text{fun } x \Rightarrow x$  equals the identity of the quantum set of a classical set of  $A$ .

**Proof.** Both sides are compared pointwise (by extensionality). The argument splits on the relevant condition. An equation between variables is used to substitute one for the other. The key step rewrites with the formula for the graph of the component, the formula for the identity of the component, the fact that the graph of the component is nonzero and the fact that the identity of the component is nonzero.

#### Lean 4 source `QLambda/Domain/QuantumClassical.lean`

```

@[simp] theorem graph_id {A : Type} [DecidableEq A] :
  graph (A := A) (B := A) (fun x => x) =
    id (QuantumSet.liftSet A) := by
  apply ext
  intro x y
  by_cases h : x = y
  * subst y
    rw [graph_component_eq, id_component_eq]
    exact span_one_one_eq_top.symm
  * rw [graph_component_ne _ _ _ h, id_component_ne h]

```

#### 4.4.1602 Graph of a composite for quantum relations

**Statement.** The graph of  $\text{fun } x \Rightarrow g \ (f \ x)$  equals  $(\text{graph } g) \cdot \text{comp} \ (\text{graph } f)$ .

**Proof.** Both sides are compared pointwise (by extensionality). Equality is proved by showing both inequalities. The argument splits on the relevant condition. An equation between variables is used to substitute one for the other. The key step rewrites with the formula for the graph of the component, the fact that the graph of the component is nonzero, standard identities for submodules and standard identities for matrices.

#### Lean 4 source `QLambda/Domain/QuantumClassical.lean`

```

@[simp] theorem graph_comp {A B C : Type}
  [DecidableEq A] [DecidableEq B] [DecidableEq C]
  (g : (QuantumSet.liftSet B).Atom ->
    (QuantumSet.liftSet C).Atom)
  (f : (QuantumSet.liftSet A).Atom ->
    (QuantumSet.liftSet B).Atom) :
  graph (fun x => g (f x)) = (graph g).comp (graph f) := by
  apply ext
  intro x z
  by_cases hxz : g (f x) = z
  * rw [show z = g (f x) from hxz.symm, graph_component_eq]
    apply Eq.symm
    apply top_unique
    rw [show ((graph g).comp (graph f)).component x (g (f x)) =
      bigcup y, (graph g).compThrough (graph f) x y (g (f x)) from rfl]
    refine le_trans ?_
      (le_iSup
        (fun y => (graph g).compThrough (graph f) x y (g (f x)))
        (f x))
  have hgen :
    (1 : Matrix (Fin 1) (Fin 1) ?) in
    (graph g).compThrough (graph f) x (f x) (g (f x)) := by
  apply Submodule.subset_span
  refine
    <(1 : Matrix (Fin 1) (Fin 1) ?),
      (1 : Matrix (Fin 1) (Fin 1) ?), ?_, ?_, ?_>
  * rw [graph_component_eq]
    exact Submodule.mem_top
  * rw [graph_component_eq]
    exact Submodule.mem_top
  * exact Matrix.one_mul _
  have hspan :
    Submodule.span ? {(1 : Matrix (Fin 1) (Fin 1) ?)} <=

```

```

      (graph g).compThrough (graph f) x (f x) (g (f x)) := by
    apply Submodule.span_le.mpr
    intro m hm
    simp only [Set.mem_singleton_iff] using hm |> hgen
    change ( top : Submodule ? (Matrix (Fin 1) (Fin 1) ?)) <=
      (graph g).compThrough (graph f) x (f x) (g (f x))
    simp only [span_one_one_eq_top] using hspan
* rw [show (graph (fun x => g (f x))).component x z = False from
  graph_component_ne _ _ _ hxz]
    apply Eq.symm
    apply le_antisymm
* change ( bigcup y, (graph g).compThrough (graph f) x y z) <= False
    apply iSup_le
    intro y
    apply Submodule.span_le.mpr
    rintro _ <r, s, hr, hs, rfl>
    by_cases hxy : f x = y
* subst y
    rw [graph_component_ne _ _ _ hxz] at hs
    have hs0 : s = 0 := by simp [Submodule.mem_bot] using hs
    rw [hs0, Matrix.zero_mul]
    exact zero_mem _
* rw [graph_component_ne _ _ _ hxy] at hr
    have hr0 : r = 0 := by simp [Submodule.mem_bot] using hr
    rw [hr0, Matrix.mul_zero]
    exact zero_mem _
* exact bot_le

```

#### 4.4.1603 Classical quantum object associated to an ordinary type

**Definition.** Classical quantum object associated to an ordinary type.

**Construction.** Constructed by supplying each component: set and decidable. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/QuantumClassical.lean](#)

```

noncomputable def classicalQObj (A : Type) : QObj where
  set := .liftSet A
  decidable := Classical.decEq A

```

#### 4.4.1604 A monotone quantum function between quantum posets

**Definition.** A monotone quantum function between quantum posets.

**Construction.** An element consists of `rel`, subject to the laws `isFunction` and `monotone`.

**Lean 4 source** [QLambda/Domain/QuantumFunction.lean](#)

```

structure QuantumFunction (P Q : QuantumPoset) where
  rel : QuantumRel P.carrier Q.carrier
  isFunction : rel.IsFunction
  monotone : rel.comp P.order <= Q.order.comp rel

```

#### 4.4.1605 Extensionality for quantum functions

**Statement.** If  $F.\text{rel} = G.\text{rel}$ , then  $F = G$ . Formally:  $F = G$ .

**Proof.** By case analysis on  $F$ .

**Lean 4 source** `QLambda/Domain/QuantumFunction.lean`

```
theorem ext {P Q : QuantumPoset} {F G : QuantumFunction P Q}
  (h : F.rel = G.rel) : F = G := by
  cases F
  cases G
  congr
```

#### 4.4.1606 Restriction of a quantum function to one atom of its domain

**Definition.** Restriction of a quantum function to one atom of its domain.

**Construction.** Constructed by supplying each component: rel, functionality and monotonicity. The accompanying laws are verified from the definitions.

**Lean 4 source** `QLambda/Domain/QuantumFunction.lean`

```
def restrictAtom {P Q : QuantumPoset} (F : QuantumFunction P Q)
  (x : P.carrier.Atom) :
  QuantumFunction (QuantumPoset.discrete
    (.atomic (P.carrier.dim x))) Q where
  rel := QuantumRel.restrictAtom F.rel x
  isFunction := QuantumRel.restrictAtom_isFunction F.isFunction x
  monotone := by
    change
    (QuantumRel.restrictAtom F.rel x).comp
      (QuantumRel.id (.atomic (P.carrier.dim x))) <=
      Q.order.comp (QuantumRel.restrictAtom F.rel x)
  rw [QuantumRel.comp_id]
  calc
    QuantumRel.restrictAtom F.rel x =
      (QuantumRel.id Q.carrier).comp
        (QuantumRel.restrictAtom F.rel x) :=
      (QuantumRel.id_comp _).symm
    _ <= Q.order.comp (QuantumRel.restrictAtom F.rel x) :=
      QuantumRel.comp_mono_left _ Q.reflexive
```

#### 4.4.1607 Functions compose, and the composite remains monotone

**Definition.** Functions compose, and the composite remains monotone.

**Construction.** Constructed by supplying each component: rel, functionality and monotonicity. The accompanying laws are verified from the definitions.

**Lean 4 source** `QLambda/Domain/QuantumFunctionInstances.lean`

```
def comp {P Q R : QuantumPoset}
  (G : QuantumFunction Q R) (F : QuantumFunction P Q) :
  QuantumFunction P R where
```

```

rel := G.rel.comp F.rel
isFunction := G.isFunction.comp F.isFunction
monotone := by
  calc
    (G.rel.comp F.rel).comp P.order
      = G.rel.comp (F.rel.comp P.order) :=
        QuantumRel.assoc _ _ _
  _ <= G.rel.comp (Q.order.comp F.rel) :=
        QuantumRel.comp_mono_right F.monotone
  _ = (G.rel.comp Q.order).comp F.rel :=
        (QuantumRel.assoc _ _ _).symm
  _ <= (R.order.comp G.rel).comp F.rel :=
        QuantumRel.comp_mono_left _ G.monotone
  _ = R.order.comp (G.rel.comp F.rel) :=
        QuantumRel.assoc _ _ _

```

#### 4.4.1608 Identity of a quantum poset is a quantum function

**Definition.** Identity of a quantum poset is a quantum function.

**Construction.** Constructed by supplying each component: rel, functionality and monotonicity. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/QuantumFunctionInstances.lean](#)

```

def idFun (P : QuantumPoset) : QuantumFunction P P where
  rel := QuantumRel.id P.carrier
  isFunction := by
    constructor
    * rw [QuantumRel.id_dagger, QuantumRel.comp_id]
    * rw [QuantumRel.id_dagger, QuantumRel.id_comp]
  monotone := by
    rw [QuantumRel.comp_id, QuantumRel.id_comp]

```

#### 4.4.1609 Classical-set inclusion into quantum relations

**Definition.** Classical-set inclusion into quantum relations.

**Construction.** Constructed interactively; the claim follows directly from the definitions of the objects involved.

**Lean 4 source** [QLambda/Domain/QuantumLNL.lean](#)

```

noncomputable def classicalToQRel :
  discreteSetCategory.PlainFunctor qRelCategory := by
  classical
  exact
  { obj := classicalQObj
    map := fun f => QuantumRel.graph f.toFun
    map_id := QuantumRel.graph_id
    map_comp := fun g f => QuantumRel.graph_comp g.toFun f.toFun }

```

#### 4.4.1610 The state-set functor, right adjoint to classical inclusion

**Definition.** The state-set functor, right adjoint to classical inclusion.

**Construction.** Constructed by supplying each component: functorial action identity and let. The accompanying laws are verified from the definitions.

**Lean 4 source** `QLambda/Domain/QuantumLNL.lean`

```
noncomputable def qRelStates :
  qRelCategory.PlainFunctor discreteSetCategory where
  obj A := QuantumRel .unit A.set
  map R :=
    <fun S => R.comp S>
  map_id := by
    intro A
    let := A.decidable
    apply SetHom.ext
    intro S
    exact QuantumRel.id_comp S
  map_comp R S := by
    apply SetHom.ext
    intro T
    exact QuantumRel.assoc R S T
```

#### 4.4.1611 Definition of the classical unit isomorphism

**Definition.** The classical singleton object and the qRel tensor unit are canonically isomorphic.

**Construction.** Defined to be `qRelIsoOfEquiv _ _ (Equiv.refl PUnit) (fun _ => rfl)`.

**Lean 4 source** `QLambda/Domain/QuantumLNL.lean`

```
noncomputable def classicalUnitIso :
  qRelCategory.Iso
  (classicalQObj PUnit) QObj.unit :=
  qRelIsoOfEquiv _ _
  (Equiv.refl PUnit)
  (fun _ => rfl)
```

#### 4.4.1612 Classical pairing agrees with the tensor of one-dimensional quantum atoms

**Definition.** Classical pairing agrees with the tensor of one-dimensional quantum atoms.

**Construction.** Defined to be `qRelIsoOfEquiv _ _ (Equiv.refl (A × B)) (fun _ => rfl)`.

**Lean 4 source** `QLambda/Domain/QuantumLNL.lean`

```
noncomputable def classicalTensorIso (A B : Type) :
  qRelCategory.Iso
  (classicalQObj (A × B))
  (QObj.tensor (classicalQObj A) (classicalQObj B)) :=
  qRelIsoOfEquiv _ _
```



```
(Equiv.refl (A x B))
(fun _ => rfl)
```

#### 4.4.1613 The concrete quantum linear/nonlinear model

**Definition.** The concrete quantum linear/nonlinear model.

**Construction.** Constructed by supplying each component: nonlinear, linear, nonlinear closed term, linear closed term,  $f$ ,  $g$ , passage to linear and passage to nonlinear, among others. The accompanying laws are verified from the definitions.

#### Lean 4 source `QLambda/Domain/QuantumLNL.lean`

```
noncomputable def quantumLNL : LNLModel where
  nonlinear := discreteSetCategory
  linear := qRelCategory
  nonlinearClosed := discreteSetCartesianClosed
  linearClosed := qRelSymmetricMonoidalClosed
  F := classicalToQRel
  G := qRelStates
  toLinear := by
    classical
    exact fun f => stateFunToRel f.toFun
  toNonlinear := by
    classical
    exact fun R => <relToStateFun R>
  toLinear_toNonlinear := by
    classical
    exact fun R => stateFunToRel_relToStateFun R
  toNonlinear_toLinear := by
    classical
    intro A B f
    apply SetHom.ext
    intro x
    exact congrFun (relToStateFun_stateFunToRel f.toFun) x
  adjunction_mono := by
    intro A B f g h
    subst g
    exact le_rfl
  F_unit := classicalUnitIso
  F_tensor := classicalTensorIso
```

#### 4.4.1614 Kronecker product, reindexed to the operator convention of tensor atoms

**Definition.** Kronecker product, reindexed to the operator convention of tensor atoms.

**Construction.** Defined to be the reindexing of the finite index prod finite index equivalence, the finite index prod finite index equivalence, the  $r$  of  $\otimes_k$  and  $s$ .

#### Lean 4 source `QLambda/Domain/QuantumMonoidal.lean`

```
noncomputable def opTensor
  {x : X.Atom} {y : Y.Atom} {a : A.Atom} {b : B.Atom}
  (r : QuantumSet.Op X Y x y) (s : QuantumSet.Op A B a b) :
```

```
QuantumSet.Op (X.tensor A) (Y.tensor B) (x, a) (y, b) :=
Matrix.reindex finProdFinEquiv finProdFinEquiv (r ?? s)
```

#### 4.4.1615 Pointwise formula for the tensor of opposite components

**Statement.** For indexes  $i, j$ :  $\text{opTensor } r \text{ } s \text{ } i \text{ } j$  equals the product of the  $r$  of  $(\text{finProdFinEquiv.symm } i).1$  and  $(\text{finProdFinEquiv.symm } j).1$  and the  $s$  of  $(\text{finProdFinEquiv.symm } i).2$  and  $(\text{finProdFinEquiv.symm } j).2$ .

**Proof.** By definition. Unfolding the tensor of opposite components turns the left-hand side,  $\text{opTensor } r \text{ } s \text{ } i \text{ } j$ , into the right-hand side, the product of the  $r$  of  $(\text{finProdFinEquiv.symm } i).1$  and  $(\text{finProdFinEquiv.symm } j).1$  and the  $s$  of  $(\text{finProdFinEquiv.symm } i).2$  and  $(\text{finProdFinEquiv.symm } j).2$ ; the two sides are the same term.

#### Lean 4 source `QLambda/Domain/QuantumMonoidal.lean`

```
@[simp] theorem opTensor_apply
  {x : X.Atom} {y : Y.Atom} {a : A.Atom} {b : B.Atom}
  (r : QuantumSet.Op X Y x y) (s : QuantumSet.Op A B a b)
  (i : Fin (Y.dim y * B.dim b)) (j : Fin (X.dim x * A.dim a)) :
  opTensor r s i j =
    r (finProdFinEquiv.symm i).1 (finProdFinEquiv.symm j).1 *
    s (finProdFinEquiv.symm i).2 (finProdFinEquiv.symm j).2 :=
  rfl
```

#### 4.4.1616 Tensor of relations, generated by elementary Kronecker products

**Definition.** Tensor of relations, generated by elementary Kronecker products.

**Construction.** Constructed by supplying each component of the structure explicitly.

#### Lean 4 source `QLambda/Domain/QuantumMonoidal.lean`

```
noncomputable def tensor (R : QuantumRel X Y) (S : QuantumRel A B) :
  QuantumRel (X.tensor A) (Y.tensor B) where
  component xa yb :=
    Submodule.span ?
    { opTensor r s |
      (r : QuantumSet.Op X Y xa.1 yb.1)
      (s : QuantumSet.Op A B xa.2 yb.2)
      ( _ : r in R.component xa.1 yb.1)
      ( _ : s in S.component xa.2 yb.2) }
```

#### 4.4.1617 Monotonicity of the tensor product of the monotonicity

**Statement.** For a quantum relation  $S$ :  $\text{fun } R$  is monotone. Formally:  $\text{Monotone fun } R$ .

**Proof.** Each component of the claim is established separately. It follows from standard identities for submodules.

#### Lean 4 source `QLambda/Domain/QuantumMonoidal.lean`

```

theorem tensor_mono_left (S : QuantumRel A B) :
  Monotone (fun R : QuantumRel X Y => tensor R S) := by
  intro R_1 R_2 h xa yb
  apply Submodule.span_mono
  rintro _ <r, s, hr, hs, rfl>
  exact <r, s, h _ _ hr, hs, rfl>

```

#### 4.4.1618 Monotonicity of the tensor product of the monotonicity

**Statement.** For a quantum relation  $R$ :  $\text{fun } S$  is monotone. Formally:  $\text{Monotone fun } S$ .

**Proof.** Each component of the claim is established separately. It follows from standard identities for submodules.

**Lean 4 source** `QLambda/Domain/QuantumMonoidal.lean`

```

theorem tensor_mono_right (R : QuantumRel X Y) :
  Monotone (fun S : QuantumRel A B => tensor R S) := by
  intro S_1 S_2 h xa yb
  apply Submodule.span_mono
  rintro _ <r, s, hr, hs, rfl>
  exact <r, s, hr, h _ _ hs, rfl>

```

#### 4.4.1619 Tensor of opposite components of zero for quantum relations, in the left argument

**Statement.** The tensor of opposite components of  $s$  at  $0$  equals  $0$ . Formally:  $\text{opTensor } 0 \ s = 0$ .

**Proof.** Both sides are compared pointwise (by extensionality). The goal is closed by simplification with the defining equations.

**Lean 4 source** `QLambda/Domain/QuantumMonoidal.lean`

```

@[simp] theorem opTensor_zero_left
  {x : X.Atom} {y : Y.Atom} {a : A.Atom} {b : B.Atom}
  (s : QuantumSet.Op A B a b) :
  opTensor (0 : QuantumSet.Op X Y x y) s = 0 := by
  ext i j
  change Fin (Y.dim y * B.dim b) at i
  change Fin (X.dim x * A.dim a) at j
  change (0 : ?) * s (finProdFinEquiv.symm i).2
    (finProdFinEquiv.symm j).2 = 0
  simp

```

#### 4.4.1620 Tensor of opposite components of zero for quantum relations, in the right argument

**Statement.** The tensor of opposite components of  $r$  at  $0$  equals  $0$ . Formally:  $\text{opTensor } r \ 0 = 0$ .

**Proof.** Both sides are compared pointwise (by extensionality). The goal is closed by simplification with the defining equations.

**Lean 4 source** `QLambda/Domain/QuantumMonoidal.lean`

```

@[simp] theorem opTensor_zero_right
  {x : X.Atom} {y : Y.Atom} {a : A.Atom} {b : B.Atom}
  (r : QuantumSet.Op X Y x y) :
  opTensor r (0 : QuantumSet.Op A B a b) = 0 := by
  ext i j
  change Fin (Y.dim y * B.dim b) at i
  change Fin (X.dim x * A.dim a) at j
  change r (finProdFinEquiv.symm i).1
    (finProdFinEquiv.symm j).1 * (0 : ?) = 0
  simp

```

#### 4.4.1621 Tensor of opposite components of a sum for quantum relations, in the left argument

**Statement.** The tensor of opposite components of the sum of  $r_1$  and  $r_2$  and  $s$  equals the sum of the tensor of opposite components of  $r_1$  and  $s$  and the tensor of opposite components of  $r_2$  and  $s$ .

**Proof.** Both sides are compared pointwise (by extensionality). The goal is simplified using the usual algebraic identities.

##### Lean 4 source `QLambda/Domain/QuantumMonoidal.lean`

```

@[simp] theorem opTensor_add_left
  {x : X.Atom} {y : Y.Atom} {a : A.Atom} {b : B.Atom}
  (r_1 r_2 : QuantumSet.Op X Y x y) (s : QuantumSet.Op A B a b) :
  opTensor (r_1 + r_2) s = opTensor r_1 s + opTensor r_2 s := by
  ext i j
  change Fin (Y.dim y * B.dim b) at i
  change Fin (X.dim x * A.dim a) at j
  change (r_1 _ _ + r_2 _ _) * s _ _ =
    r_1 _ _ * s _ _ + r_2 _ _ * s _ _
  simp [add_mul]

```

#### 4.4.1622 Tensor of opposite components of a sum for quantum relations, in the right argument

**Statement.** The tensor of opposite components of  $r$  and the sum of  $s_1$  and  $s_2$  equals the sum of the tensor of opposite components of  $r$  and  $s_1$  and the tensor of opposite components of  $r$  and  $s_2$ .

**Proof.** Both sides are compared pointwise (by extensionality). The goal is simplified using the usual algebraic identities.

##### Lean 4 source `QLambda/Domain/QuantumMonoidal.lean`

```

@[simp] theorem opTensor_add_right
  {x : X.Atom} {y : Y.Atom} {a : A.Atom} {b : B.Atom}
  (r : QuantumSet.Op X Y x y) (s_1 s_2 : QuantumSet.Op A B a b) :
  opTensor r (s_1 + s_2) = opTensor r s_1 + opTensor r s_2 := by
  ext i j
  change Fin (Y.dim y * B.dim b) at i
  change Fin (X.dim x * A.dim a) at j
  change r _ _ * (s_1 _ _ + s_2 _ _) =
    r _ _ * s_1 _ _ + r _ _ * s_2 _ _
  simp [mul_add]

```

#### 4.4.1623 Tensor of opposite components of a scalar multiple for quantum relations, in the left argument

**Statement.** For a complex number  $c$ : the tensor of opposite components of  $c \cdot r$  and  $s$  equals the tensor of opposite components of  $r$  and  $s$  scaled by  $c$ .

**Proof.** Both sides are compared pointwise (by extensionality). The goal is simplified using associativity of multiplication.

**Lean 4 source** `QLambda/Domain/QuantumMonoidal.lean`

```
@[simp] theorem opTensor_smul_left
  {x : X.Atom} {y : Y.Atom} {a : A.Atom} {b : B.Atom}
  (c : ?) (r : QuantumSet.Op X Y x y) (s : QuantumSet.Op A B a b) :
  opTensor (c * r) s = c * opTensor r s := by
  ext i j
  change Fin (Y.dim y * B.dim b) at i
  change Fin (X.dim x * A.dim a) at j
  change (c * r _ _) * s _ _ = c * (r _ _ * s _ _)
  simp [mul_assoc]
```

#### 4.4.1624 Tensor of opposite components of a scalar multiple for quantum relations, in the right argument

**Statement.** For a complex number  $c$ : the tensor of opposite components of  $r$  and  $c \cdot s$  equals the tensor of opposite components of  $r$  and  $s$  scaled by  $c$ .

**Proof.** Both sides are compared pointwise (by extensionality). The goal is simplified using the usual algebraic identities.

**Lean 4 source** `QLambda/Domain/QuantumMonoidal.lean`

```
@[simp] theorem opTensor_smul_right
  {x : X.Atom} {y : Y.Atom} {a : A.Atom} {b : B.Atom}
  (c : ?) (r : QuantumSet.Op X Y x y) (s : QuantumSet.Op A B a b) :
  opTensor r (c * s) = c * opTensor r s := by
  ext i j
  change Fin (Y.dim y * B.dim b) at i
  change Fin (X.dim x * A.dim a) at j
  change r _ _ * (c * s _ _) = c * (r _ _ * s _ _)
  simp [mul_left_comm]
```

#### 4.4.1625 Tensor of opposite components of one for quantum relations

**Statement.**  $\text{opTensor } (X := X) (Y := X) (A := A) (B := A) 1 1 \text{ equals } 1 : \text{QuantumSet.Op } (X.\text{tensor } A) (X.\text{tensor } A) (x, a) (x, a).$

**Proof.** The key step rewrites with standard identities for matrices and the definition of the tensor of opposite components.

**Lean 4 source** `QLambda/Domain/QuantumMonoidal.lean`

```
@[simp] theorem opTensor_one
  {x : X.Atom} {a : A.Atom} :
```

```

opTensor (X := X) (Y := X) (A := A) (B := A)
  (1 : QuantumSet.Op X X x x)
  (1 : QuantumSet.Op A A a a) =
  (1 : QuantumSet.Op (X.tensor A) (X.tensor A) (x, a) (x, a)) := by
unfold opTensor
rw [Matrix.one_kronecker_one]
exact Matrix.reindexLinearEquiv_one ? ? finProdFinEquiv

```

#### 4.4.1626 Tensor of opposite components of a product for quantum relations

**Statement.** The tensor of opposite components of the product of  $r_2$  and  $r_1$  and the product of  $s_2$  and  $s_1$  equals the product of the tensor of opposite components of  $r_2$  and  $s_2$  and the tensor of opposite components of  $r_1$  and  $s_1$ .

**Proof.** The key step rewrites with standard identities for matrices and the definition of the tensor of opposite components.

#### Lean 4 source `QLambda/Domain/QuantumMonoidal.lean`

```

@[simp] theorem opTensor_mul
  {x : X.Atom} {y : Y.Atom} {z : Z.Atom}
  {a : A.Atom} {b : B.Atom} {c : C.Atom}
  (r_2 : QuantumSet.Op Y Z y z) (r_1 : QuantumSet.Op X Y x y)
  (s_2 : QuantumSet.Op B C b c) (s_1 : QuantumSet.Op A B a b) :
  opTensor (r_2 * r_1) (s_2 * s_1) =
    opTensor r_2 s_2 * opTensor r_1 s_1 := by
unfold opTensor
change
  Matrix.reindexLinearEquiv ? ? finProdFinEquiv finProdFinEquiv
    ((r_2 * r_1) ?? (s_2 * s_1)) =
    Matrix.reindexLinearEquiv ? ? finProdFinEquiv finProdFinEquiv
      (r_2 ?? s_2) *
      Matrix.reindexLinearEquiv ? ? finProdFinEquiv finProdFinEquiv
        (r_1 ?? s_1)
rw [Matrix.reindexLinearEquiv_mul, Matrix.mul_kronecker_mul]

```

#### 4.4.1627 Tensor sends identity relations to the identity relation

**Statement.** Tensor sends identity relations to the identity relation. Formally:  $\text{tensor } (\text{id } X) (\text{id } A) = \text{id } (X.\text{tensor } A)$ .

**Proof.** Both sides are compared pointwise (by extensionality). Equality is proved by showing both inequalities. The argument splits on the relevant condition. The hypotheses are unpacked into their constituent data. An equation between variables is used to substitute one for the other. The key step rewrites with the formula for the identity of the component, the tensor of opposite components of a scalar multiple for quantum relations, in the left argument, the tensor of opposite components of a scalar multiple for quantum relations, in the right argument and the tensor of opposite components of one for quantum relations.

#### Lean 4 source `QLambda/Domain/QuantumMonoidal.lean`

```

theorem tensor_id [DecidableEq X.Atom] [DecidableEq A.Atom] :
  tensor (id X) (id A) = id (X.tensor A) := by
  apply ext

```

```

rintro <x, a> <y, b>
by_cases hxy : x = y
* subst y
  by_cases hab : a = b
  * subst b
    rw [id_component_eq]
    apply le_antisymm
  * apply Submodule.span_le.mpr
    rintro _ <r, s, hr, hs, rfl>
    have hr' : r in Submodule.span ?
      {(1 : Matrix (Fin (X.dim x)) (Fin (X.dim x)) ?)} := by
        simp [id] using hr
    have hs' : s in Submodule.span ?
      {(1 : Matrix (Fin (A.dim a)) (Fin (A.dim a)) ?)} := by
        simp [id] using hs
    obtain <cr, rfl> := Submodule.mem_span_singleton.mp hr'
    obtain <cs, rfl> := Submodule.mem_span_singleton.mp hs'
    rw [opTensor_smul_left, opTensor_smul_right, opTensor_one]
    rw [smul_smul]
    apply Submodule.smul_mem
    exact Submodule.subset_span (Set.mem_singleton _)
  * apply Submodule.span_le.mpr
    rintro _ rfl
    refine Submodule.subset_span
      <(1 : Matrix (Fin (X.dim x)) (Fin (X.dim x)) ?),
        (1 : Matrix (Fin (A.dim a)) (Fin (A.dim a)) ?), ?_, ?_, opTensor_one>
    * simp [id]
    * simp [id]
  * have hp : (x, a) != (x, b) := fun h => hab (Prod.mk.inj h).2
    rw [show (id (X.tensor A)).component (x, a) (x, b) = False from
      id_component_ne hp]
    apply le_bot_iff.mp
    apply Submodule.span_le.mpr
    rintro _ <r, s, hr, hs, rfl>
    have hs0 : s = 0 := by
      have : s in (False : OpSpace A A a b) := by
        simp [id, hab] using hs
      simp [Submodule.mem_bot] using this
    subst s
    simp
  * have hp : (x, a) != (y, b) := fun h => hxy (Prod.mk.inj h).1
    rw [show (id (X.tensor A)).component (x, a) (y, b) = False from
      id_component_ne hp]
    apply le_bot_iff.mp
    apply Submodule.span_le.mpr
    rintro _ <r, s, hr, hs, rfl>
    have hr0 : r = 0 := by
      have : r in (False : OpSpace X X x y) := by
        simp [id, hxy] using hr
      simp [Submodule.mem_bot] using this
    subst r
    simp

```

#### 4.4.1628 Tensor is compatible with relational composition

**Statement.** Tensor is compatible with relational composition. Formally:  $\text{tensor } (R_2.\text{comp } R_1) (S_2.\text{comp } S_1) = (\text{tensor } R_2 S_2).\text{comp } (\text{tensor } R_1 S_1)$ .

**Proof.** Both sides are compared pointwise (by extensionality). Equality is proved by showing both inequalities. The hypotheses are unpacked into their constituent data. The key step rewrites with the definition of the composition, standard identities for submodules, the tensor of opposite components of zero for quantum relations, in the left argument and the tensor of opposite components of zero for quantum relations, in the right argument.

**Lean 4 source** `QLambda/Domain/QuantumMonoidal.lean`

```
theorem tensor_comp
  (R_2 : QuantumRel Y Z) (R_1 : QuantumRel X Y)
  (S_2 : QuantumRel B C) (S_1 : QuantumRel A B) :
  tensor (R_2.comp R_1) (S_2.comp S_1) =
    (tensor R_2 S_2).comp (tensor R_1 S_1) := by
  apply ext
  rintro <x, a> <z, c>
  apply le_antisymm
  * apply Submodule.span_le.mpr
    rintro _ <u, v, hu, hv, rfl>
    have hu' :
      u in Submodule.span ?
        (? y, (R_2.compThrough R_1 x y z : Set _)) := by
      simpa [comp, Submodule.iSup_eq_span] using hu
    have hv' :
      v in Submodule.span ?
        (? b, (S_2.compThrough S_1 a b c : Set _)) := by
      simpa [comp, Submodule.iSup_eq_span] using hv
    refine Submodule.span_induction_2
      (p := fun u v _ =>
        opTensor u v in
          ((tensor R_2 S_2).comp (tensor R_1 S_1)).component (x, a) (z, c))
      ?_
      (fun v _ => by rw [opTensor_zero_left]; exact zero_mem _)
      (fun u _ => by rw [opTensor_zero_right]; exact zero_mem _)
      (fun u_1 u_2 v _ _ h_1 h_2 => by
        rw [opTensor_add_left]
        exact add_mem h_1 h_2)
      (fun u v_1 v_2 _ _ h_1 h_2 => by
        rw [opTensor_add_right]
        exact add_mem h_1 h_2)
      (fun d u v _ _ h => by
        rw [opTensor_smul_left]
        exact Submodule.smul_mem _ d h)
      (fun d u v _ _ h => by
        rw [opTensor_smul_right]
        exact Submodule.smul_mem _ d h)
    hu' hv'
  intro u v hu0 hv0
  obtain <y, huy> := Set.mem_iUnion.mp hu0
  obtain <b, hvb> := Set.mem_iUnion.mp hv0
  refine Submodule.span_induction_2
    (p := fun u v _ =>
```



```

    opTensor u v in
      ((tensor R_2 S_2).comp (tensor R_1 S_1)).component (x, a) (z, c))
  ?_
  (fun v _ => by rw [opTensor_zero_left]; exact zero_mem _)
  (fun u _ => by rw [opTensor_zero_right]; exact zero_mem _)
  (fun u_1 u_2 v _ _ h_1 h_2 => by
    rw [opTensor_add_left]
    exact add_mem h_1 h_2)
  (fun u v_1 v_2 _ _ h_1 h_2 => by
    rw [opTensor_add_right]
    exact add_mem h_1 h_2)
  (fun d u v _ _ h => by
    rw [opTensor_smul_left]
    exact Submodule.smul_mem _ d h)
  (fun d u v _ _ h => by
    rw [opTensor_smul_right]
    exact Submodule.smul_mem _ d h)
  huy hvb
rintro _ _ <r_1, r_2, hr_1, hr_2, rfl>
  <s_1, s_2, hs_1, hs_2, rfl>
rw [opTensor_mul]
apply (le_iSup
  (fun yb => (tensor R_2 S_2).compThrough (tensor R_1 S_1)
    (x, a) yb (z, c)) (y, b))
refine Submodule.subset_span <opTensor r_1 s_1, opTensor r_2 s_2, ?_, ?_, rfl>
* exact Submodule.subset_span <r_1, s_1, hr_1, hs_1, rfl>
* exact Submodule.subset_span <r_2, s_2, hr_2, hs_2, rfl>
* apply iSup_le
rintro <y, b>
apply Submodule.span_le.mpr
rintro _ <r, s, hr, hs, rfl>
refine Submodule.span_induction_2
  (p := fun s r _ _ =>
    s * r in
      (tensor (R_2.comp R_1) (S_2.comp S_1)).component (x, a) (z, c))
  ?_
  (fun r _ => by rw [Matrix.zero_mul]; exact zero_mem _)
  (fun s _ => by rw [Matrix.mul_zero]; exact zero_mem _)
  (fun s_1 s_2 r _ _ h_1 h_2 => by
    rw [Matrix.add_mul]
    exact add_mem h_1 h_2)
  (fun s r_1 r_2 _ _ h_1 h_2 => by
    rw [Matrix.mul_add]
    exact add_mem h_1 h_2)
  (fun d s r _ _ h => by
    rw [Matrix.smul_mul]
    exact Submodule.smul_mem _ d h)
  (fun d s r _ _ h => by
    rw [Matrix.mul_smul]
    exact Submodule.smul_mem _ d h)
  hs hr
rintro _ _ <r_2, s_2, hr_2, hs_2, rfl>
  <r_1, s_1, hr_1, hs_1, rfl>
rw [← opTensor_mul]
refine Submodule.subset_span <r_2 * r_1, s_2 * s_1, ?_, ?_, rfl>
* apply (le_iSup (fun y => R_2.compThrough R_1 x y z) y)

```

```

exact Submodule.subset_span <r_1, r_2, hr_1, hr_2, rfl>
* apply (le_iSup (fun b => S_2.compThrough S_1 a b c) b)
exact Submodule.subset_span <s_1, s_2, hs_1, hs_2, rfl>

```

#### 4.4.1629 Identity matrix transported across an equality of dimensions

**Definition.** Identity matrix transported across an equality of dimensions.

**Construction.** Constructed interactively; an equation between variables is used to substitute one for the other.

**Lean 4 source** [QLambda/Domain/QuantumMonoidal.lean](#)

```

def transportMatrix {m n : Nat} (h : m = n) :
  Matrix (Fin n) (Fin m) ? := by
  subst n
  exact 1

```

#### 4.4.1630 Transport matrix of a rfl

**Statement.** For a natural number  $n$ : the transport matrix of `rfl` equals  $1 : \text{Matrix } (\text{Fin } n) (\text{Fin } n) \mathbb{C}$ .

**Proof.** By definition. Unfolding the transport matrix turns the left-hand side, the transport matrix of `rfl`, into the right-hand side,  $1 : \text{Matrix } (\text{Fin } n) (\text{Fin } n) \mathbb{C}$ ; the two sides are the same term.

**Lean 4 source** [QLambda/Domain/QuantumMonoidal.lean](#)

```

@[simp] theorem transportMatrix_rfl (n : Nat) :
  transportMatrix (rfl : n = n) = (1 : Matrix (Fin n) (Fin n) ?) :=
  rfl

```

#### 4.4.1631 Symmetry of the transport matrix, at a product

**Statement.** For natural numbers  $m, n$ : if  $m = n$ , then the product of the transport matrix of `h.symm` and the transport matrix of `h` equals  $1 : \text{Matrix } (\text{Fin } m) (\text{Fin } m) \mathbb{C}$ .

**Proof.** An equation between variables is used to substitute one for the other. The goal is closed by simplification with the defining equations.

**Lean 4 source** [QLambda/Domain/QuantumMonoidal.lean](#)

```

theorem transportMatrix_symm_mul {m n : Nat} (h : m = n) :
  transportMatrix h.symm * transportMatrix h =
    (1 : Matrix (Fin m) (Fin m) ?) := by
  subst n
  simp

```

#### 4.4.1632 Symmetry of the transport matrix of a product

**Statement.** For natural numbers  $m, n$ : if  $m = n$ , then the product of the transport matrix of  $h$  and the transport matrix of  $h.\text{symm}$  equals  $1 : \text{Matrix } (\text{Fin } n) (\text{Fin } n) \mathbb{C}$ .

**Proof.** An equation between variables is used to substitute one for the other. The goal is closed by simplification with the defining equations.

**Lean 4 source** `QLambda/Domain/QuantumMonoidal.lean`

```
theorem transportMatrix_mul_symm {m n : Nat} (h : m = n) :
  transportMatrix h * transportMatrix h.symm =
    (1 : Matrix (Fin n) (Fin n) ?) := by
  subst n
  simp
```

#### 4.4.1633 Relation implementing an atom equivalence whose dimensions agree

**Definition.** Relation implementing an atom equivalence whose dimensions agree.

**Construction.** Constructed by supplying each component of the structure explicitly.

**Lean 4 source** `QLambda/Domain/QuantumMonoidal.lean`

```
noncomputable def reindexRel (e : X.Atom ? Y.Atom)
  [DecidableEq Y.Atom]
  (hdim : forall x, X.dim x = Y.dim (e x)) : QuantumRel X Y where
  component x y :=
    if h : y = e x then
      h |> Submodule.span ? {transportMatrix (hdim x)}
    else
      False
```

#### 4.4.1634 Formula for the reindexing rel of the component

**Statement.** If for every  $x$ ,  $X.\text{dim } x = Y.\text{dim } (e x)$ , then  $(\text{reindexRel } e \text{ hdim}).\text{component } x (e x)$  equals the span of  $\mathbb{C}$  and  $\{\text{transportMatrix } (hdim x)\}$ .

**Proof.** The goal is simplified using the definition of the reindexing rel.

**Lean 4 source** `QLambda/Domain/QuantumMonoidal.lean`

```
@[simp] theorem reindexRel_component_eq
  (e : X.Atom ? Y.Atom) [DecidableEq Y.Atom]
  (hdim : forall x, X.dim x = Y.dim (e x))
  (x : X.Atom) :
  (reindexRel e hdim).component x (e x) =
    Submodule.span ? {transportMatrix (hdim x)} := by
  simp [reindexRel]
```

#### 4.4.1635 The reindexing rel of the component is nonzero

**Statement.** If for every  $x$ ,  $X.\text{dim } x = Y.\text{dim } (e x)$  and  $y \neq e x$ , then  $(\text{reindexRel } e \text{ hdim}).\text{component } x y = \perp$ .

**Proof.** The goal is simplified using the definition of the reindexing rel and the hypothesis that  $y \neq e x$ .

**Lean 4 source** `QLambda/Domain/QuantumMonoidal.lean`

```
@[simp] theorem reindexRel_component_ne
  (e : X.Atom → Y.Atom) [DecidableEq Y.Atom]
  (hdim : forall x, X.dim x = Y.dim (e x))
  {x : X.Atom} {y : Y.Atom} (h : y != e x) :
  (reindexRel e hdim).component x y = False := by
  simp [reindexRel, h]
```

#### 4.4.1636 Inverse relation, using the same forward atom equation as reindexing rel

**Definition.** Inverse relation, using the same forward atom equation as `reindexRel`.

**Construction.** Constructed by supplying each component of the structure explicitly.

**Lean 4 source** `QLambda/Domain/QuantumMonoidal.lean`

```
noncomputable def reindexRelInv (e : X.Atom → Y.Atom)
  [DecidableEq Y.Atom]
  (hdim : forall x, X.dim x = Y.dim (e x)) : QuantumRel Y X where
  component y x :=
  if h : y = e x then
    h |> Submodule.span ? {transportMatrix (hdim x).symm}
  else
    False
```

#### 4.4.1637 Formula for the reindexing rel inverse of the component

**Statement.** If for every  $x$ ,  $X.\text{dim } x = Y.\text{dim } (e x)$ , then  $(\text{reindexRelInv } e \text{ hdim}).\text{component } (e x) x$  equals the span of  $\mathbb{C}$  and  $\{\text{transportMatrix } (\text{hdim } x).\text{symm}\}$ .

**Proof.** The goal is simplified using the definition of the reindexing rel inverse.

**Lean 4 source** `QLambda/Domain/QuantumMonoidal.lean`

```
@[simp] theorem reindexRelInv_component_eq
  (e : X.Atom → Y.Atom) [DecidableEq Y.Atom]
  (hdim : forall x, X.dim x = Y.dim (e x)) (x : X.Atom) :
  (reindexRelInv e hdim).component (e x) x =
  Submodule.span ? {transportMatrix (hdim x).symm} := by
  simp [reindexRelInv]
```

#### 4.4.1638 The inverse reindexing relation composes to the identity

**Statement.** The inverse reindexing relation composes to the identity. Formally:  $(\text{reindexRelInv } e \text{ hdim}).\text{comp } (\text{reindexRel } e \text{ hdim}) = \text{id } X$ .

**Proof.** Both sides are compared pointwise (by extensionality). Equality is proved by showing both inequalities. The argument splits on the relevant condition. The hypotheses are unpacked into their constituent data. An equation between variables is used to substitute one for the other. The key step rewrites with the

formula for the identity of the component, standard identities for matrices, the usual algebraic identities and the definition of the reindexing rel.

#### Lean 4 source `QLambda/Domain/QuantumMonoidal.lean`

```
theorem reindexRel_inverse_comp [DecidableEq X.Atom] [DecidableEq Y.Atom]
  (e : X.Atom → Y.Atom) (hdim : forall x, X.dim x = Y.dim (e x)) :
  (reindexRelInv e hdim).comp (reindexRel e hdim) = id X := by
  apply ext
  intro x z
  by_cases hxz : x = z
  * subst z
    rw [id_component_eq]
    apply le_antisymm
  * apply iSup_le
    intro y
    by_cases hy : y = e x
    * subst y
      apply Submodule.span_le.mpr
      rintro _ <r, s, hr, hs, rfl>
      have hr' : r in Submodule.span ? {transportMatrix (hdim x)} := by
        simpa using hr
      have hs' : s in Submodule.span ?
        {transportMatrix (hdim x).symm} := by
        simpa using hs
      obtain <cr, rfl> := Submodule.mem_span_singleton.mp hr'
      obtain <cs, rfl> := Submodule.mem_span_singleton.mp hs'
      rw [Matrix.smul_mul, Matrix.mul_smul, smul_smul]
      have hInv :
        transportMatrix (hdim x).symm *
        transportMatrix (hdim x) =
        (1 : Matrix (Fin (X.dim x)) (Fin (X.dim x)) ?) := by
        exact transportMatrix_symm_mul (hdim x)
      rw [hInv]
      exact Submodule.smul_mem _ _ (Submodule.subset_span (Set.mem_singleton _))
    * apply Submodule.span_le.mpr
      rintro _ <r, s, hr, hs, rfl>
      have hr0 : r = 0 := by
        have : r in (False : OpSpace X Y x y) := by
          simpa [reindexRel, hy] using hr
        simpa [Submodule.mem_bot] using this
      subst r
      simp
  * refine le_trans ?_
    (le_iSup (fun y =>
      (reindexRelInv e hdim).compThrough
      (reindexRel e hdim) x y x) (e x))
    apply Submodule.span_le.mpr
    rintro _ rfl
    refine Submodule.subset_span
      <transportMatrix (hdim x),
        transportMatrix (hdim x).symm, ?_, ?_, ?_>
  * simp
  * simp
  * exact transportMatrix_symm_mul (hdim x)
  * rw [id_component_ne hxz]
```

```

apply le_bot_iff.mp
apply iSup_le
intro y
apply Submodule.span_le.mpr
rintro _ <r, s, hr, hs, rfl>
by_cases hy : y = e x
* subst y
  have hs0 : s = 0 := by
    have : s in (False : OpSpace Y X (e x) z) := by
      simpa [reindexRelInv, hxz, e.injective.eq_iff] using hs
    simpa [Submodule.mem_bot] using this
  subst s
  simp
* have hr0 : r = 0 := by
  have : r in (False : OpSpace X Y x y) := by
    simpa [reindexRel, hy] using hr
  simpa [Submodule.mem_bot] using this
  subst r
  simp

```

#### 4.4.1639 The forward reindexing relation also composes with its inverse to identity

**Statement.** The forward reindexing relation also composes with its inverse to identity. Formally:  
 $(\text{reindexRel } e \text{ hdim}).\text{comp } (\text{reindexRelInv } e \text{ hdim}) = \text{id } Y.$

**Proof.** Both sides are compared pointwise (by extensionality). Equality is proved by showing both inequalities. The argument splits on the relevant condition. The hypotheses are unpacked into their constituent data. An equation between variables is used to substitute one for the other. The key step rewrites with the formula for the identity of the component, standard identities for matrices, the usual algebraic identities and the symmetry of the transport matrix of a product.

#### Lean 4 source `QLambda/Domain/QuantumMonoidal.lean`

```

theorem reindexRel_comp_inverse [DecidableEq X.Atom] [DecidableEq Y.Atom]
  (e : X.Atom → Y.Atom) (hdim : forall x, X.dim x = Y.dim (e x)) :
  (reindexRel e hdim).comp
    (reindexRelInv e hdim) = id Y := by
  apply ext
  intro y w
  by_cases hyw : y = w
  * subst w
    obtain <x_0, rfl> := e.surjective y
    rw [id_component_eq]
    apply le_antisymm
  * apply iSup_le
    intro x
    by_cases hx : x_0 = x
    * subst x
      apply Submodule.span_le.mpr
      rintro _ <r, s, hr, hs, rfl>
      have hr' : r in Submodule.span ? {transportMatrix (hdim x_0).symm} := by
        simpa using hr
      have hs' : s in Submodule.span ? {transportMatrix (hdim x_0)} := by
        simpa using hs

```

```

obtain <cr, rfl> := Submodule.mem_span_singleton.mp hr'
obtain <cs, rfl> := Submodule.mem_span_singleton.mp hs'
rw [Matrix.smul_mul, Matrix.mul_smul, smul_smul,
    transportMatrix_mul_symm]
exact Submodule.smul_mem _ _ (Submodule.subset_span (Set.mem_singleton _))
* apply Submodule.span_le.mpr
rintro _ <r, s, hr, hs, rfl>
have hr0 : r = 0 := by
  have : r in (False : OpSpace Y X (e x_0) x) := by
    simpa [reindexRelInv, hy, e.injective.eq_iff] using hr
  simpa [Submodule.mem_bot] using this
subst r
simp
*
refine le_trans ?_
  (le_iSup (fun x =>
    (reindexRel e hdim).compThrough
      (reindexRelInv e hdim) (e x_0) x (e x_0)) x_0)
apply Submodule.span_le.mpr
rintro _ rfl
refine Submodule.subset_span
  <transportMatrix (hdim x_0).symm, transportMatrix (hdim x_0), ?_, ?_, ?_>
* simp
* simp
* exact transportMatrix_mul_symm (hdim x_0)
* rw [id_component_ne hyw]
apply le_bot_iff.mp
apply iSup_le
intro x
apply Submodule.span_le.mpr
rintro _ <r, s, hr, hs, rfl>
by_cases hy : y = e x
* subst y
  have hs0 : s = 0 := by
    have : s in (False : OpSpace X Y x w) := by
      simpa [reindexRel, Ne.symm hyw] using hs
    simpa [Submodule.mem_bot] using this
  subst s
  simp
* have hr0 : r = 0 := by
  have : r in (False : OpSpace Y X y x) := by
    simpa [reindexRelInv, hy] using hr
  simpa [Submodule.mem_bot] using this
  subst r
  simp

```

#### 4.4.1640 Reshape an operator $X \otimes A \rightarrow B$ as an operator $X \rightarrow A^* \otimes B$

**Definition.** Reshape an operator  $X \otimes A \rightarrow B$  as an operator  $X \rightarrow A^* \otimes B$ .

**Construction.** Constructed by supplying each component of the structure explicitly.

**Lean 4 source** `QLambda/Domain/QuantumMonoidal.lean`

```
noncomputable def curryOpEquiv (nx na nb : Nat) :
```

```

Matrix (Fin nb) (Fin (nx * na)) ? ??[?]
Matrix (Fin (na * nb)) (Fin nx) ? where
toFun f i x :=
  f (finProdFinEquiv.symm i).2
  (finProdFinEquiv (x, (finProdFinEquiv.symm i).1))
invFun g b xa :=
  g (finProdFinEquiv ((finProdFinEquiv.symm xa).2, b))
  (finProdFinEquiv.symm xa).1
left_inv f := by
  ext b xa
  generalize hx : finProdFinEquiv.symm xa = p
  rcases p with <x, a>
  have hxa : xa = finProdFinEquiv (x, a) := by
    rw [ <- hx ]
    exact (Equiv.apply_symm_apply finProdFinEquiv xa).symm
  subst xa
  simp
right_inv g := by
  ext i x
  generalize hi : finProdFinEquiv.symm i = p
  rcases p with <a, b>
  have hi' : i = finProdFinEquiv (a, b) := by
    rw [ <- hi ]
    exact (Equiv.apply_symm_apply finProdFinEquiv i).symm
  subst i
  simp
map_add' f g := by
  ext i x
  rfl
map_smul' c f := by
  ext i x
  rfl

```

#### 4.4.1641 Compact-closed internal hom $A^\star \otimes B$

**Definition.** Compact-closed internal hom  $A^\star \otimes B$ .

**Construction.** Defined to be the tensor product of  $B$ .

**Lean 4 source** [QLambda/Domain/QuantumMonoidal.lean](#)

```

abbrev internalHom (A B : QuantumSet) : QuantumSet :=
  A.dual.tensor B

```

#### 4.4.1642 Relational currying, implemented by the canonical matrix reshaping

**Definition.** Relational currying, implemented by the canonical matrix reshaping.

**Construction.** Constructed by supplying each component of the structure explicitly.

**Lean 4 source** [QLambda/Domain/QuantumMonoidal.lean](#)

```

noncomputable def curry (R : QuantumRel (X.tensor A) B) :
  QuantumRel X (internalHom A B) where
  component x ab :=

```



```

Submodule.map
  (curryOpEquiv (X.dim x) (A.dim ab.1) (B.dim ab.2)).toLinearMap
  (R.component (x, ab.1) ab.2)

```

#### 4.4.1643 Inverse matrix reshaping for relational uncurrying

**Definition.** Inverse matrix reshaping for relational uncurrying.

**Construction.** Constructed by supplying each component of the structure explicitly.

**Lean 4 source** [QLambda/Domain/QuantumMonoidal.lean](#)

```

noncomputable def uncurry (R : QuantumRel X (internalHom A B)) :
  QuantumRel (X.tensor A) B where
  component xa b :=
    Submodule.map
      (curryOpEquiv (X.dim xa.1) (A.dim xa.2) (B.dim b)).symm.toLinearMap
      (R.component xa.1 (xa.2, b))

```

#### 4.4.1644 Monotonicity of the currying

**Statement.** `curry` is monotone. Formally: `Monotone (curry : QuantumRel (X.tensor A) B → QuantumRel X (internalHom A B))`.

**Proof.** It follows from standard identities for submodules.

**Lean 4 source** [QLambda/Domain/QuantumMonoidal.lean](#)

```

theorem curry_mono : Monotone
  (curry : QuantumRel (X.tensor A) B -> QuantumRel X (internalHom A B)) := by
  intro R S h x ab
  exact Submodule.map_mono (h (x, ab.1) ab.2)

```

#### 4.4.1645 Monotonicity of the uncurrying

**Statement.** `uncurry` is monotone. Formally: `Monotone (uncurry : QuantumRel X (internalHom A B) → QuantumRel (X.tensor A) B)`.

**Proof.** It follows from standard identities for submodules.

**Lean 4 source** [QLambda/Domain/QuantumMonoidal.lean](#)

```

theorem uncurry_mono : Monotone
  (uncurry : QuantumRel X (internalHom A B) -> QuantumRel (X.tensor A) B) := by
  intro R S h xa b
  exact Submodule.map_mono (h xa.1 (xa.2, b))

```

#### 4.4.1646 Currying of an uncurrying

**Statement.** For a quantum relation `R`: the currying of the uncurrying of `R` equals `R`.

**Proof.** Both sides are compared pointwise (by extensionality). The goal is simplified using the definition of the currying, the definition of the uncurrying, the extensionality for bilinear maps and standard identities for submodules.

**Lean 4 source** `QLambda/Domain/QuantumMonoidal.lean`

```
theorem curry_uncurry (R : QuantumRel X (internalHom A B)) :
  curry (uncurry R) = R := by
  apply ext
  rintro x <a, b>
  simp only [curry, uncurry]
  exact (Submodule.map_symm_eq_iff
    (curryOpEquiv (X.dim x) (A.dim a) (B.dim b))).mp rfl
```

#### 4.4.1647 Uncurrying of a currying

**Statement.** For a quantum relation  $R$ : the uncurrying of the currying of  $R$  equals  $R$ .

**Proof.** Both sides are compared pointwise (by extensionality). The goal is simplified using the definition of the uncurrying, the definition of the currying, the extensionality for bilinear maps and standard identities for submodules.

**Lean 4 source** `QLambda/Domain/QuantumMonoidal.lean`

```
theorem uncurry_curry (R : QuantumRel (X.tensor A) B) :
  uncurry (curry R) = R := by
  apply ext
  rintro <x, a> b
  simp only [uncurry, curry]
  exact (Submodule.map_symm_eq_iff
    (curryOpEquiv (X.dim x) (A.dim a) (B.dim b))).mpr rfl
```

#### 4.4.1648 Currying of an indexed supremum for quantum relations

**Statement.** The currying of  $\bigcup n, R n$  equals  $\bigcup n, \text{curry } (R n)$ . Formally:  $\text{curry } (\bigcup n, R n) = \bigcup n, \text{curry } (R n)$ .

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the extensionality for bilinear maps and standard identities for submodules.

**Lean 4 source** `QLambda/Domain/QuantumMonoidal.lean`

```
theorem curry_iSup (R : Nat -> QuantumRel (X.tensor A) B) :
  curry (bigcup n, R n) = bigcup n, curry (R n) := by
  apply ext
  rintro x <a, b>
  change
  Submodule.map
    (curryOpEquiv (X.dim x) (A.dim a) (B.dim b)).toLinearMap
    ((bigcup n, R n).component (x, a) b) =
    (bigcup n, curry (R n)).component x (a, b)
  rw [show ((bigcup n, R n).component (x, a) b) =
    bigcup n, (R n).component (x, a) b from
    iSup_component R (x, a) b]
```

```

rw [show (( bigcup n, curry (R n)).component x (a, b)) =
  bigcup n, (curry (R n)).component x (a, b) from
  iSup_component (fun n => curry (R n)) x (a, b)]
change
  Submodule.map
    (curryOpEquiv (X.dim x) (A.dim a) (B.dim b)).toLinearMap
    ( bigcup n, (R n).component (x, a) b) =
  bigcup n, Submodule.map
    (curryOpEquiv (X.dim x) (A.dim a) (B.dim b)).toLinearMap
    ((R n).component (x, a) b)
exact Submodule.map_iSup
  (curryOpEquiv (X.dim x) (A.dim a) (B.dim b)).toLinearMap
  (fun n => (R n).component (x, a) b)

```

#### 4.4.1649 Uncurrying of an indexed supremum for quantum relations

**Statement.** The uncurrying of  $\bigcup n, R n$  equals  $\bigcup n, \text{uncurry } (R n)$ . Formally:  $\text{uncurry } (\bigcup n, R n) = \bigcup n, \text{uncurry } (R n)$ .

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the extensionality for bilinear maps and standard identities for submodules.

**Lean 4 source** `QLambda/Domain/QuantumMonoidal.lean`

```

theorem uncurry_iSup (R : Nat -> QuantumRel X (internalHom A B)) :
  uncurry ( bigcup n, R n) = bigcup n, uncurry (R n) := by
  apply ext
  rintro <x, a> b
  change
    Submodule.map
      (curryOpEquiv (X.dim x) (A.dim a) (B.dim b)).symm.toLinearMap
      (( bigcup n, R n).component x (a, b)) =
    ( bigcup n, uncurry (R n)).component (x, a) b
  rw [show (( bigcup n, R n).component x (a, b)) =
    bigcup n, (R n).component x (a, b) from
    iSup_component R x (a, b)]
  rw [show (( bigcup n, uncurry (R n)).component (x, a) b) =
    bigcup n, (uncurry (R n)).component (x, a) b from
    iSup_component (fun n => uncurry (R n)) (x, a) b]
  change
    Submodule.map
      (curryOpEquiv (X.dim x) (A.dim a) (B.dim b)).symm.toLinearMap
      ( bigcup n, (R n).component x (a, b)) =
    bigcup n, Submodule.map
      (curryOpEquiv (X.dim x) (A.dim a) (B.dim b)).symm.toLinearMap
      ((R n).component x (a, b))
  exact Submodule.map_iSup
    (curryOpEquiv (X.dim x) (A.dim a) (B.dim b)).symm.toLinearMap
    (fun n => (R n).component x (a, b))

```

#### 4.4.1650 Evaluation induced by compact-closed uncurrying

**Definition.** Evaluation induced by compact-closed uncurrying.

**Construction.** Defined to be the uncurrying of the identity of `internalHom A B`.

**Lean 4 source** `QLambda/Domain/QuantumMonoidal.lean`

```
noncomputable def eval (A B : QuantumSet)
  [DecidableEq (internalHom A B).Atom] :
  QuantumRel ((internalHom A B).tensor A) B :=
  uncurry (id (internalHom A B))
```

#### 4.4.1651 Compact-closed internal hom on packaged quantum sets

**Definition.** Compact-closed internal hom on packaged quantum sets.

**Construction.** Constructed by supplying each component: set and decidable. The accompanying laws are verified from the definitions.

**Lean 4 source** `QLambda/Domain/QuantumMonoidal.lean`

```
def internalHom (A B : QObj) : QObj where
  set := QuantumRel.internalHom A.set B.set
  decidable :=
    inferInstanceAs (DecidableEq (A.set.Atom x B.set.Atom))
```

#### 4.4.1652 Turn a dimension-preserving atom equivalence into an isomorphism in quantum rel

**Definition.** Turn a dimension-preserving atom equivalence into an isomorphism in `qRel`.

**Construction.** Constructed by supplying each component: morphism, inverse, morphism inverse and inverse morphism. The accompanying laws are verified from the definitions.

**Lean 4 source** `QLambda/Domain/QuantumMonoidal.lean`

```
noncomputable def qRelIsoOfEquiv (X Y : QObj)
  (e : X.set.Atom → Y.set.Atom)
  (hdim : forall x, X.set.dim x = Y.set.dim (e x)) :
  qRelCategory.Iso X Y where
  hom := QuantumRel.reindexRel e hdim
  inv := QuantumRel.reindexRelInv e hdim
  hom_inv := QuantumRel.reindexRel_comp_inverse e hdim
  inv_hom := QuantumRel.reindexRel_inverse_comp e hdim
```

#### 4.4.1653 Left unitor relation $I \otimes X \cong X$

**Definition.** Left unitor relation  $I \otimes X \cong X$ .

**Construction.** Defined to be the quantum rel isomorphism of equivalence.

**Lean 4 source** `QLambda/Domain/QuantumMonoidal.lean`

```
noncomputable def qRelLeftUnitor (X : QObj) :
  qRelCategory.Iso (QObj.tensor QObj.unit X) X :=
  qRelIsoOfEquiv _ _
  (Equiv.punitProd X.set.Atom)
  (fun p => by
```

```

rcases p with <u, x>
cases u
exact Nat.one_mul (X.set.dim x))

```

#### 4.4.1654 Right unitor relation $X \otimes I \cong X$

**Definition.** Right unitor relation  $X \otimes I \cong X$ .

**Construction.** Defined to be the quantum rel isomorphism of equivalence.

**Lean 4 source** [QLambda/Domain/QuantumMonoidal.lean](#)

```

noncomputable def qRelRightUnitor (X : QObj) :
  qRelCategory.Iso (QObj.tensor X QObj.unit) X :=
  qRelIsoOfEquiv _ _
    (Equiv.prodPUnit X.set.Atom)
    (fun p => by
      rcases p with <x, u>
      cases u
      exact Nat.mul_one (X.set.dim x))

```

#### 4.4.1655 Associator relation $(X \otimes Y) \otimes Z \cong X \otimes (Y \otimes Z)$

**Definition.** Associator relation  $(X \otimes Y) \otimes Z \cong X \otimes (Y \otimes Z)$ .

**Construction.** Defined to be the quantum rel isomorphism of equivalence.

**Lean 4 source** [QLambda/Domain/QuantumMonoidal.lean](#)

```

noncomputable def qRelAssociator (X Y Z : QObj) :
  qRelCategory.Iso
    (QObj.tensor (QObj.tensor X Y) Z)
    (QObj.tensor X (QObj.tensor Y Z)) :=
  qRelIsoOfEquiv _ _
    (Equiv.prodAssoc X.set.Atom Y.set.Atom Z.set.Atom)
    (fun p => by
      rcases p with <<x, y>, z>
      exact Nat.mul_assoc (X.set.dim x) (Y.set.dim y) (Z.set.dim z))

```

#### 4.4.1656 Braiding relation $X \otimes Y \cong Y \otimes X$

**Definition.** Braiding relation  $X \otimes Y \cong Y \otimes X$ .

**Construction.** Defined to be the quantum rel isomorphism of equivalence.

**Lean 4 source** [QLambda/Domain/QuantumMonoidal.lean](#)

```

noncomputable def qRelBraiding (X Y : QObj) :
  qRelCategory.Iso (QObj.tensor X Y) (QObj.tensor Y X) :=
  qRelIsoOfEquiv _ _
    (Equiv.prodComm X.set.Atom Y.set.Atom)
    (fun p => by
      rcases p with <x, y>
      exact Nat.mul_comm (X.set.dim x) (Y.set.dim y))

```

#### 4.4.1657 The symmetric monoidal closed structure on quantum relations

**Definition.** The symmetric monoidal closed structure on quantum relations.

**Construction.** Constructed by supplying each component: unit, tensor product, internal hom, tensor product functorial action, tensor product functorial action monotonicity left, tensor product functorial action monotonicity right, tensor product functorial action identity and tensor product functorial action composite, among others. The accompanying laws are verified from the definitions.

#### Lean 4 source `QLambda/Domain/QuantumMonoidal.lean`

```
noncomputable def qRelSymmetricMonoidalClosed :
  SymmetricMonoidalClosed qRelCategory where
  unit := QObj.unit
  tensor := QObj.tensor
  internalHom := QObj.internalHom
  tensorMap := QuantumRel.tensor
  tensorMap_mono_left := by
    intro A B C D g
    exact QuantumRel.tensor_mono_left g
  tensorMap_mono_right := by
    intro A B C D f
    exact QuantumRel.tensor_mono_right f
  tensorMap_id := by
    intro A B
    let _ := A.decidable
    let _ := B.decidable
    exact QuantumRel.tensor_id
  tensorMap_comp := by
    intro A B C D E F f_2 f_1 g_2 g_1
    exact QuantumRel.tensor_comp f_2 f_1 g_2 g_1
  leftUnitor := qRelLeftUnitor
  rightUnitor := qRelRightUnitor
  associator := qRelAssociator
  braiding := qRelBraiding
  eval := fun {A B} => by
    let I := A.decidable
    let I := B.decidable
    let I : DecidableEq (QuantumRel.internalHom A.set B.set).Atom :=
      inferInstanceAs (DecidableEq (A.set.Atom x B.set.Atom))
    exact QuantumRel.eval _ _
  curry := QuantumRel.curry
  uncurry := QuantumRel.uncurry
  curry_uncurry := QuantumRel.curry_uncurry
  uncurry_curry := QuantumRel.uncurry_curry
  curry_mono := by
    intro X A B
    exact QuantumRel.curry_mono
  curry_?Sup := by
    intro X A B c hc
    change QuantumRel.curry (bigcup n, c n) =
      bigcup n, QuantumRel.curry (c n)
    exact QuantumRel.curry_iSup c
```

#### 4.4.1658 A quantum poset in the sense of Weaver / Kornell–Lindhovius–Mislove

**Definition.** A quantum poset in the sense of Weaver / Kornell–Lindhovius–Mislove.

**Construction.** An element consists of carrier and order, subject to the laws reflexive, transitive and antisymmetric.

**Lean 4 source** `QLambda/Domain/QuantumPoset.lean`

```
structure QuantumPoset where
  carrier : QuantumSet
  [decidable : DecidableEq carrier.Atom]
  order : QuantumRel carrier carrier
  reflexive : QuantumRel.id carrier <= order
  transitive : order.comp order <= order
  antisymmetric : order sqcap order.dagger <= QuantumRel.id carrier
```

#### 4.4.1659 The discrete order

**Definition.** The discrete order. Discrete quantum posets are quantum CPOs because comparable functions are equal, so every increasing function-chain is constant.

**Construction.** Constructed by supplying each component: carrier, order, reflexive, transitive and antisymmetric. The accompanying laws are verified from the definitions.

**Lean 4 source** `QLambda/Domain/QuantumPoset.lean`

```
def discrete (X : QuantumSet) [DecidableEq X.Atom] : QuantumPoset where
  carrier := X
  order := QuantumRel.id X
  reflexive := le_rfl
  transitive := by rw [QuantumRel.id_comp]
  antisymmetric := inf_le_left
```

#### 4.4.1660 The qubit with the discrete order

**Definition.** The qubit with the discrete order.

**Construction.** Defined to be the discrete of a qubit.

**Lean 4 source** `QLambda/Domain/QuantumPoset.lean`

```
def qubit : QuantumPoset :=
  discrete .qubit
```

#### 4.4.1661 The classical bit with the discrete order

**Definition.** The classical bit with the discrete order.

**Construction.** Defined to be the discrete of a bit.

**Lean 4 source** `QLambda/Domain/QuantumPoset.lean`

```
def bit : QuantumPoset :=
  discrete .bit
```

#### 4.4.1662 The monoidal unit

**Definition.** The monoidal unit.

**Construction.** Defined to be the discrete of a unit.

**Lean 4 source** `QLambda/Domain/QuantumPoset.lean`

```
def unit : QuantumPoset :=  
  discrete .unit
```

#### 4.4.1663 Tensor of discrete quantum posets is the discrete order on the tensor quantum set

**Definition.** Tensor of discrete quantum posets is the discrete order on the tensor quantum set.

**Construction.** Defined to be the discrete of the tensor product of  $Y$ .

**Lean 4 source** `QLambda/Domain/QuantumPoset.lean`

```
def tensorDiscrete (X Y : QuantumSet)  
  [DecidableEq X.Atom] [DecidableEq Y.Atom] : QuantumPoset :=  
  discrete (X.tensor Y)
```

#### 4.4.1664 A quantum order is idempotent under relational composition

**Statement.** A quantum order is idempotent under relational composition. Formally:  $P.order.comp\ P.order = P.order$ .

**Proof.** Equality is proved by showing both inequalities. The claim follows from a chain of equalities (or inequalities). It follows from antisymmetry of the order.

**Lean 4 source** `QLambda/Domain/QuantumPoset.lean`

```
theorem order_comp_self (P : QuantumPoset) :  
  P.order.comp P.order = P.order := by  
  apply le_antisymm P.transitive  
  calc  
    P.order = P.order.comp (QuantumRel.id P.carrier) :=  
      (QuantumRel.comp_id _).symm  
    _ <= P.order.comp P.order :=  
      QuantumRel.comp_mono_right P.reflexive
```

#### 4.4.1665 The published completeness property of a quantum CPO, stated for atomic probes $h\ d$ (Def

**Definition.** The published completeness property of a quantum CPO, stated for atomic probes  $H\_d$  (Def. 5.2).

**Construction.** Defined by an explicit formula built from the quantum relation, the composition and the functionality.

**Lean 4 source** `QLambda/Domain/QuantumPoset.lean`



```

def IsQuantumCPO (P : QuantumPoset) : Prop :=
  forall (d : Nat) (K : Nat -> QuantumRel (.atomic d) P.carrier),
    (forall n, (K n).IsFunction) ->
      (forall n, K (n + 1) <= P.order.comp (K n)) ->
        exists Kinf : QuantumRel (.atomic d) P.carrier,
          Kinf.IsFunction /\
            P.order.comp Kinf = ? n, P.order.comp (K n)

```

#### 4.4.1666 Discrete of the quantum CPO property

**Statement.** Discrete quantum posets are qCPOs: an increasing sequence of functions is constant, so the relational limit is the first term. Formally: `IsQuantumCPO (QuantumPoset.discrete X)`.

**Proof.** By induction on  $n$ . The case of zero is immediate; for a successor, the claim follows from the induction hypothesis. The key step rewrites with the fact that the identity is a left unit for composition for quantum relations, the fact that the function respects order and the fact that observational equality is symmetric.

#### Lean 4 source `QLambda/Domain/QuantumPoset.lean`

```

theorem discrete_isQuantumCPO (X : QuantumSet) [DecidableEq X.Atom] :
  IsQuantumCPO (QuantumPoset.discrete X) := by
  intro d K hfun hinc
  refine <K 0, hfun 0, ?_>
  have hord :
    (QuantumPoset.discrete X).order =
      QuantumRel.id (QuantumPoset.discrete X).carrier :=
    rfl
  have hconst : forall n, K n = K 0 := by
    intro n
    induction n with
    | zero => rfl
    | succ n ih =>
      have hle : K (n + 1) <= K n := by
        have h := hinc n
        rw [hord, QuantumRel.id_comp] at h
        exact h
      exact (QuantumRel.function_eq_of_le (hfun (n + 1)) (hfun n) hle).trans ih
  rw [hord]
  have : (fun n => (QuantumRel.id (QuantumPoset.discrete X).carrier).comp (K n)) =
    fun _ => (QuantumRel.id (QuantumPoset.discrete X).carrier).comp (K 0) := by
    funext n
    rw [hconst n]
  rw [this]
  exact iInf_const.symm

```

#### 4.4.1667 Qubit of the quantum CPO property

**Statement.** `IsQuantumCPO .qubit`. Formally: `IsQuantumCPO .qubit`.

**Proof.** This is an instance of the discrete of the quantum CPO property, applied to the definition of the qubit.

#### Lean 4 source `QLambda/Domain/QuantumPoset.lean`

```
theorem qubit_isQuantumCPO : IsQuantumCPO .qubit :=
  discrete_isQuantumCPO .qubit
```

#### 4.4.1668 Bit of the quantum CPO property

**Statement.** `IsQuantumCPO .bit`. Formally: `IsQuantumCPO .bit`.

**Proof.** This is an instance of the discrete of the quantum CPO property, applied to the definition of the bit.

**Lean 4 source** `QLambda/Domain/QuantumPoset.lean`

```
theorem bit_isQuantumCPO : IsQuantumCPO .bit :=
  discrete_isQuantumCPO .bit
```

#### 4.4.1669 Unit of the quantum CPO property

**Statement.** `IsQuantumCPO .unit`. Formally: `IsQuantumCPO .unit`.

**Proof.** This is an instance of the discrete of the quantum CPO property, applied to the definition of the unit.

**Lean 4 source** `QLambda/Domain/QuantumPoset.lean`

```
theorem unit_isQuantumCPO : IsQuantumCPO .unit :=
  discrete_isQuantumCPO .unit
```

#### 4.4.1670 Operator space from atom $x$ of $X$ to atom $y$ of $Y$

**Definition.** Operator space from atom  $x$  of  $X$  to atom  $y$  of  $Y$ .

**Construction.** Defined to be the submodule of  $\mathbb{C}$  and `QuantumSet.Op X Y x y`.

**Lean 4 source** `QLambda/Domain/QuantumRel.lean`

```
abbrev OpSpace (X Y : QuantumSet) (x : X.Atom) (y : Y.Atom) : Type :=
  Submodule ? (QuantumSet.Op X Y x y)
```

#### 4.4.1671 A quantum binary relation: one operator subspace per pair of atoms

**Definition.** A quantum binary relation: one operator subspace per pair of atoms.

**Construction.** An element consists of `component`.

**Lean 4 source** `QLambda/Domain/QuantumRel.lean`

```
structure QuantumRel (X Y : QuantumSet) where
  component : forall (x : X.Atom) (y : Y.Atom), OpSpace X Y x y
```

#### 4.4.1672 The zero relation

**Definition.** The zero relation.

**Construction.** Constructed by supplying each component: component. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/QuantumRel.lean](#)

```
def bot : QuantumRel X Y where
  component := fun _ _ => False
```

#### 4.4.1673 The top relation: every operator is allowed

**Definition.** The top relation: every operator is allowed.

**Construction.** Constructed by supplying each component: component. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/QuantumRel.lean](#)

```
def top : QuantumRel X Y where
  component := fun _ _ => top
```

#### 4.4.1674 Restrict the domain of a relation to one atomic summand

**Definition.** Restrict the domain of a relation to one atomic summand.

**Construction.** Constructed by supplying each component: component. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/QuantumRelAtoms.lean](#)

```
def restrictAtom (R : QuantumRel X Y) (x : X.Atom) :
  QuantumRel (.atomic (X.dim x)) Y where
  component := fun _ y => R.component x y
```

#### 4.4.1675 Reassemble a relation from its restrictions to all domain atoms

**Definition.** Reassemble a relation from its restrictions to all domain atoms.

**Construction.** Constructed by supplying each component: component. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/QuantumRelAtoms.lean](#)

```
def assembleAtoms
  (K : forall x : X.Atom, QuantumRel (.atomic (X.dim x)) Y) :
  QuantumRel X Y where
  component := fun x y => (K x).component PUnit.unit y
```

#### 4.4.1676 Restriction to an atom of an assembly from atoms

**Statement.** The restriction to an atom of the assembly from atoms of  $K$  and  $x$  equals the  $k$  of  $x$ .

**Proof.** Both sides are compared pointwise (by extensionality). The hypotheses are unpacked into their constituent data. It follows from the extensionality for bilinear maps.

**Lean 4 source** [QLambda/Domain/QuantumRelAtoms.lean](#)

```
@[simp] theorem restrictAtom_assembleAtoms
  (K : forall x : X.Atom, QuantumRel (.atomic (X.dim x)) Y)
  (x : X.Atom) :
  restrictAtom (assembleAtoms K) x = K x := by
  apply ext
  intro u y
  cases u
  rfl
```

#### 4.4.1677 Assembly from atoms of the restriction to an atom for quantum relations

**Statement.** For a quantum relation  $R$ : the assembly from atoms of  $\text{fun } x \Rightarrow \text{restrictAtom } R \ x$  equals  $R$ .

**Proof.** Both sides are compared pointwise (by extensionality). It follows from the extensionality for bilinear maps.

**Lean 4 source** [QLambda/Domain/QuantumRelAtoms.lean](#)

```
@[simp] theorem assembleAtoms_restrictAtom (R : QuantumRel X Y) :
  assembleAtoms (fun x => restrictAtom R x) = R := by
  apply ext
  intro x y
  rfl
```

#### 4.4.1678 Monotonicity of the restriction to an atom

**Statement.** For quantum relations  $R, S$ : if  $R \leq S$ , then  $\text{restrictAtom } R \ x \leq \text{restrictAtom } S \ x$ .

**Proof.** It follows from the hypothesis that  $R \leq S$ .

**Lean 4 source** [QLambda/Domain/QuantumRelAtoms.lean](#)

```
theorem restrictAtom_mono {R S : QuantumRel X Y} (h : R <= S)
  (x : X.Atom) :
  restrictAtom R x <= restrictAtom S x := by
  intro u y
  exact h x y
```

#### 4.4.1679 Restriction to an atom of a composite for quantum relations

**Statement.** For quantum relations  $S, R$ : the restriction to an atom of the composition of  $R$  and  $x$  equals the composition of the restriction to an atom of  $R$  and  $x$ .

**Proof.** Both sides are compared pointwise (by extensionality). The hypotheses are unpacked into their constituent data. It follows from the extensionality for bilinear maps.

#### Lean 4 source `QLambda/Domain/QuantumRelAtoms.lean`

```
@[simp] theorem restrictAtom_comp (S : QuantumRel Y Z)
  (R : QuantumRel X Y) (x : X.Atom) :
  restrictAtom (S.comp R) x = S.comp (restrictAtom R x) := by
  apply ext
  intro u z
  cases u
  rfl
```

#### 4.4.1680 Order bound for the restriction to an atom of a composite of an adjoint

**Statement.** For a quantum relation  $R$ :  $(\text{restrictAtom } R \ x) \cdot \text{comp} \ (\text{restrictAtom } R \ x) \cdot \text{dagger} \leq R \cdot \text{comp} \ R \cdot \text{dagger}$ .

**Proof.** The claim follows from a chain of equalities (or inequalities).

#### Lean 4 source `QLambda/Domain/QuantumRelAtoms.lean`

```
theorem restrictAtom_comp_dagger_le (R : QuantumRel X Y) (x : X.Atom) :
  (restrictAtom R x).comp (restrictAtom R x).dagger <=
  R.comp R.dagger := by
  intro y z
  calc
    ((restrictAtom R x).comp
      (restrictAtom R x).dagger).component y z =
      (restrictAtom R x).compThrough
        (restrictAtom R x).dagger y
        (default : (QuantumSet.atomic (X.dim x)).Atom) z :=
    by
      change (bigcup u : (QuantumSet.atomic (X.dim x)).Atom,
        (restrictAtom R x).compThrough
          (restrictAtom R x).dagger y u z) =
        (restrictAtom R x).compThrough
          (restrictAtom R x).dagger y default z
      exact iSup_unique
        (f := fun u : (QuantumSet.atomic (X.dim x)).Atom =>
          (restrictAtom R x).compThrough
            (restrictAtom R x).dagger y u z)
    _ = R.compThrough R.dagger y x z := by rfl
    _ <= (R.comp R.dagger).component y z :=
    le_iSup (fun x' => R.compThrough R.dagger y x' z) x
```

#### 4.4.1681 Restriction to an atom of an adjoint of a composite of itself of the component for quantum relations

**Statement.** For a quantum relation  $R$ :  $((\text{restrictAtom } R \ x) \cdot \text{dagger} \cdot \text{comp} \ (\text{restrictAtom } R \ x)) \cdot \text{component } u \ v \text{ equals } (R \cdot \text{dagger} \cdot \text{comp } R) \cdot \text{component } x \ x$ .

**Proof.** By case analysis on  $u$ .

#### Lean 4 source `QLambda/Domain/QuantumRelAtoms.lean`

```
theorem restrictAtom_dagger_comp_self_component (R : QuantumRel X Y)
  (x : X.Atom) (u v : (QuantumSet.atomic (X.dim x)).Atom) :
  ((restrictAtom R x).dagger.comp (restrictAtom R x)).component u v =
  (R.dagger.comp R).component x x := by
  cases u
  cases v
  rfl
```

#### 4.4.1682 Restriction to an atom of the functionality for quantum relations

**Statement.** For a quantum relation  $R$ : if  $R$  is functional, then `restrictAtom R x` is functional.

**Proof.** Each component of the claim is established separately. An equation between variables is used to substitute one for the other. The key step rewrites with the formula for the identity of the component, the restriction to an atom of an adjoint of a composite of itself of the component for quantum relations and the order bound for the restriction to an atom of a composite of an adjoint.

#### Lean 4 source `QLambda/Domain/QuantumRelAtoms.lean`

```
theorem restrictAtom_isFunction [DecidableEq X.Atom] [DecidableEq Y.Atom]
  {R : QuantumRel X Y} (hR : R.IsFunction) (x : X.Atom) :
  (restrictAtom R x).IsFunction := by
  constructor
  * exact (restrictAtom_comp_dagger_le R x).trans hR.1
  * intro u v
  have hu : u = default := Subsingleton.elim _ _
  have hv : v = default := Subsingleton.elim _ _
  subst u
  subst v
  rw [id_component_eq]
  rw [restrictAtom_dagger_comp_self_component]
  change
    Submodule.span ?
      {(1 : Matrix (Fin (X.dim x)) (Fin (X.dim x)) ?)} <=
      (R.dagger.comp R).component x x
  simpa only [id_component_eq] using hR.2 x x
```

#### 4.4.1683 Assembly from atoms of the functionality for quantum relations

**Statement.** If for every  $x$ ,  $K \ x$  is functional, then `assembleAtoms K` is functional.

**Proof.** Each component of the claim is established separately. The argument splits on the relevant condition. An equation between variables is used to substitute one for the other. The key step rewrites with the formula for the identity of the component, the fact that the identity of the component is nonzero, standard identities for submodules and the hypothesis that for every  $x$ ,  $K \ x$  is functional.

#### Lean 4 source `QLambda/Domain/QuantumRelAtoms.lean`

```
theorem assembleAtoms_isFunction [DecidableEq X.Atom] [DecidableEq Y.Atom]
  (K : forall x : X.Atom, QuantumRel (.atomic (X.dim x)) Y)
  (hK : forall x, (K x).IsFunction) :
  (assembleAtoms K).IsFunction := by
```

```

constructor
* intro y z
  apply iSup_le
  intro x
  have hx := (hK x).1 y z
  change (K x).compThrough (K x).dagger y
    (default : (QuantumSet.atomic (X.dim x)).Atom) z <=
    (id Y).component y z
  exact (le_iSup
    (fun u => (K x).compThrough (K x).dagger y u z)
    (default : (QuantumSet.atomic (X.dim x)).Atom)).trans hx
* intro x x'
  by_cases hxx : x = x'
  * subst x'
    rw [id_component_eq]
    apply Submodule.span_le.mpr
    rintro _ rfl
    have hone :
      (1 : Matrix (Fin (X.dim x)) (Fin (X.dim x)) ?) in
      (id (QuantumSet.atomic (X.dim x))).component
      default default := by
    rw [id_component_eq]
    exact Submodule.subset_span
      (Set.mem_singleton
        (1 : Matrix (Fin (X.dim x)) (Fin (X.dim x)) ?))
    exact (hK x).2 default default hone
  * rw [id_component_ne hxx]
    exact bot_le

```

#### 4.4.1684 Indexed infimum of the component for quantum relations

**Statement.**  $(\bigcap n, S n).component\ x\ y = \bigcap n, (S n).component\ x\ y$ . Formally:  $(\bigcap n, S n).component\ x\ y = \bigcap n, (S n).component\ x\ y$ .

**Proof.** Equality is proved by showing both inequalities. The hypotheses are unpacked into their constituent data. The key step rewrites with antisymmetry of the order.

#### Lean 4 source `QLambda/Domain/QuantumRelChains.lean`

```

theorem iInf_component (S : Nat -> QuantumRel X Y) (x : X.Atom) (y : Y.Atom) :
  (? n, S n).component x y = ? n, (S n).component x y := by
  apply le_antisymm
  * apply le_iInf
    intro n
    exact iInf_le_of_le <S n, <n, rfl>> le_rfl
  * apply le_iInf
    intro R
    obtain <n, hn> := R.property
    rw [← hn]
    exact iInf_le (fun n => (S n).component x y) n

```

#### 4.4.1685 Restriction to an atom of the indexed infimum for quantum relations

**Statement.** The restriction to an atom of  $\bigcap n, S n$  and  $x$  equals  $\bigcap n, \text{restrictAtom } (S n) x$ .

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the indexed infimum of the component for quantum relations and the extensionality for bilinear maps.

#### Lean 4 source `QLambda/Domain/QuantumRelChains.lean`

```
@[simp] theorem restrictAtom_iInf (S : Nat -> QuantumRel X Y) (x : X.Atom) :
  restrictAtom (? n, S n) x = ? n, restrictAtom (S n) x := by
  apply ext
  intro u y
  rw [iInf_component]
  exact iInf_component S x y
```

#### 4.4.1686 Indexed supremum of the component for quantum relations

**Statement.**  $(\bigcup n, S n).component\ x\ y = \bigcup n, (S n).component\ x\ y$ . Formally:  $(\bigcup n, S n).component\ x\ y = \bigcup n, (S n).component\ x\ y$ .

**Proof.** Equality is proved by showing both inequalities. The hypotheses are unpacked into their constituent data. An equation between variables is used to substitute one for the other. It follows from antisymmetry of the order.

#### Lean 4 source `QLambda/Domain/QuantumRelChains.lean`

```
theorem iSup_component (S : Nat -> QuantumRel X Y) (x : X.Atom) (y : Y.Atom) :
  (bigcup n, S n).component x y = bigcup n, (S n).component x y := by
  apply le_antisymm
  * apply iSup_le
    intro <R, hR>
    obtain <n, hn> := hR
    subst R
    exact le_iSup (fun n => (S n).component x y) n
  * apply iSup_le
    intro n
    exact le_iSup_of_le <S n, <n, rfl>> le_refl
```

#### 4.4.1687 Composition of an indexed supremum for quantum relations, in the left argument

**Statement.** For a quantum relation  $R$ :  $(\bigcup n, S n).comp\ R = \bigcup n, (S n).comp\ R$ .

**Proof.** Equality is proved by showing both inequalities. The hypotheses are unpacked into their constituent data. The key step rewrites with the indexed supremum of the component for quantum relations, standard identities for submodules, antisymmetry of the order and the monotonicity of the composition of the monotonicity.

#### Lean 4 source `QLambda/Domain/QuantumRelChains.lean`

```
theorem comp_iSup_left (S : Nat -> QuantumRel Y Z) (R : QuantumRel X Y) :
  (bigcup n, S n).comp R = bigcup n, (S n).comp R := by
  apply le_antisymm
  * intro x z
    apply iSup_le
    intro y
    apply Submodule.span_le.mpr
```



```

rintro m <r, s, hr, hs, rfl>
have : s * r in
  Submodule.map (mulRightLM (p := Z.dim z) r)
    ((bigcup n, S n).component y z) :=
  Submodule.mem_map.mpr <s, hs, rfl>
rw [iSup_component S y z, Submodule.map_iSup] at this
refine (iSup_le (fun n => ?_)) :
  _ <= (bigcup n, (S n).comp R).component x z) this
intro t ht
obtain <s', hs', rfl> := Submodule.mem_map.mp ht
apply (le_iSup (fun n => (S n).comp R) n)
apply (le_iSup (fun y => (S n).compThrough R x y z) y)
exact Submodule.subset_span <r, s', hr, hs', rfl>
* apply iSup_le
intro n
exact comp_mono_left R (le_iSup S n)

```

#### 4.4.1688 Composition of an indexed supremum for quantum relations, in the right argument

**Statement.** For a quantum relation  $S$ : the composition of  $\bigcup n, R n$  equals  $\bigcup n, S.\text{comp } (R n)$ .

**Proof.** Equality is proved by showing both inequalities. The hypotheses are unpacked into their constituent data. The key step rewrites with the indexed supremum of the component for quantum relations, standard identities for submodules, antisymmetry of the order and the monotonicity of the composition of the monotonicity.

#### Lean 4 source `QLambda/Domain/QuantumRelChains.lean`

```

theorem comp_iSup_right (S : QuantumRel Y Z) (R : Nat -> QuantumRel X Y) :
  S.comp (bigcup n, R n) = bigcup n, S.comp (R n) := by
  apply le_antisymm
  * intro x z
    apply iSup_le
    intro y
    apply Submodule.span_le.mpr
    rintro m <r, s, hr, hs, rfl>
    have : s * r in
      Submodule.map (mulLeftLM (n := X.dim x) s)
        ((bigcup n, R n).component x y) :=
      Submodule.mem_map.mpr <r, hr, rfl>
    rw [iSup_component R x y, Submodule.map_iSup] at this
    refine (iSup_le (fun n => ?_)) :
      _ <= (bigcup n, S.comp (R n)).component x z) this
    intro t ht
    obtain <r', hr', rfl> := Submodule.mem_map.mp ht
    apply (le_iSup (fun n => S.comp (R n)) n)
    apply (le_iSup (fun y => S.compThrough (R n) x y z) y)
    exact Submodule.subset_span <r', s, hr', hs, rfl>
  * apply iSup_le
    intro n
    exact comp_mono_right (le_iSup R n)

```

#### 4.4.1689 Identity relation: scalar multiples of 1 on matching atoms

**Definition.** Identity relation: scalar multiples of 1 on matching atoms.

**Construction.** Constructed by supplying each component of the structure explicitly.

**Lean 4 source** [QLambda/Domain/QuantumRelComp.lean](#)

```
def id (X : QuantumSet) [DecidableEq X.Atom] : QuantumRel X X where
  component x y :=
    if h : x = y then
      h |> Submodule.span ?
        {(1 : Matrix (Fin (X.dim x)) (Fin (X.dim x)) ?)}
    else
      False
```

#### 4.4.1690 Finite products of operators through one intermediate atom

**Definition.** Finite products of operators through one intermediate atom.

**Construction.** Defined to be the span of  $\mathbb{C}$  and  $\{ s * r \mid r s \_ \_ \}$ .

**Lean 4 source** [QLambda/Domain/QuantumRelComp.lean](#)

```
def compThrough (S : QuantumRel Y Z) (R : QuantumRel X Y)
  (x : X.Atom) (y : Y.Atom) (z : Z.Atom) : OpSpace X Z x z :=
  Submodule.span ?
    { (s * r : QuantumSet.Op X Z x z) |
      (r : QuantumSet.Op X Y x y)
      (s : QuantumSet.Op Y Z y z)
      ( _ : r in R.component x y)
      ( _ : s in S.component y z) }
```

#### 4.4.1691 Relational composition as the join of all intermediate atoms

**Definition.** Relational composition as the join of all intermediate atoms.

**Construction.** Constructed by supplying each component of the structure explicitly.

**Lean 4 source** [QLambda/Domain/QuantumRelComp.lean](#)

```
def comp (S : QuantumRel Y Z) (R : QuantumRel X Y) : QuantumRel X Z where
  component x z := bigcup y, S.compThrough R x y z
```

#### 4.4.1692 The dagger / converse relation

**Definition.** The dagger / converse relation.

**Construction.** Constructed by supplying each component of the structure explicitly.

**Lean 4 source** [QLambda/Domain/QuantumRelComp.lean](#)

```
def dagger (R : QuantumRel X Y) : QuantumRel Y X where
  component y x :=
    Submodule.span ?
```

```
{ (r? : QuantumSet.Op Y X y x) |
  (r : QuantumSet.Op X Y x y) (⌊ : r in R.component x y) }
```

#### 4.4.1693 A function is a relation satisfying the ordinary graph equations $F \circ F^\dagger \leq I$ and $F^\dagger \circ F \geq I$

**Definition.** A function is a relation satisfying the ordinary graph equations  $F \circ F^\dagger \leq I$  and  $F^\dagger \circ F \geq I$ .

**Construction.** Defined to be  $(F.\text{comp } F.\text{dagger}) \leq \text{id } Y \wedge \text{id } X \leq (F.\text{dagger}.\text{comp } F)$ .

#### Lean 4 source `QLambda/Domain/QuantumRelComp.lean`

```
def IsFunction [DecidableEq X.Atom] [DecidableEq Y.Atom]
  (F : QuantumRel X Y) : Prop :=
  (F.comp F.dagger) <= id Y /\ id X <= (F.dagger.comp F)
```

#### 4.4.1694 Extensionality for quantum relations

**Statement.** For quantum relations  $R, S$ : if for every  $x, y$ ,  $R.\text{component } x y = S.\text{component } x y$ , then  $R = S$ .

**Proof.** By case analysis on the quantum relation  $R$ . It follows from the hypothesis that for every  $x, y$ ,  $R.\text{component } x y = S.\text{component } x y$ .

#### Lean 4 source `QLambda/Domain/QuantumRelComp.lean`

```
theorem ext {R S : QuantumRel X Y}
  (h : forall x y, R.component x y = S.component x y) : R = S := by
  cases R
  cases S
  congr 1
  funext x y
  exact h x y
```

#### 4.4.1695 Definition of the order for quantum relations

**Statement.** For quantum relations  $R, S$ :  $R \leq S$  if and only if for every  $x, y$ ,  $R.\text{component } x y \leq S.\text{component } x y$ .

**Proof.** Both sides are the same proposition once the definitions are unfolded.

#### Lean 4 source `QLambda/Domain/QuantumRelComp.lean`

```
theorem le_def {R S : QuantumRel X Y} :
  R <= S <-> forall x y, R.component x y <= S.component x y :=
  Iff.rfl
```

#### 4.4.1696 Formula for the identity of the component

**Statement.**  $(\text{id } X).\text{component } x \ x$  equals the span of  $\mathbb{C}$  and  $\{(1 : \text{Matrix } (\text{Fin } (X.\text{dim } x)) (\text{Fin } (X.\text{dim } x)) \ \mathbb{C})\}$ .

**Proof.** The goal is closed by simplification with the defining equations.

**Lean 4 source** `QLambda/Domain/QuantumRelComp.lean`

```
@[simp] theorem id_component_eq [DecidableEq X.Atom] (x : X.Atom) :
  (id X).component x x =
    Submodule.span ?
      {(1 : Matrix (Fin (X.dim x)) (Fin (X.dim x)) ?)} := by
  simp [id]
```

#### 4.4.1697 The identity of the component is nonzero

**Statement.** If  $x \neq y$ , then  $(\text{id } X).\text{component } x \ y = \perp$ . Formally:  $(\text{id } X).\text{component } x \ y = \perp$ .

**Proof.** The goal is simplified using the hypothesis that  $x \neq y$ .

**Lean 4 source** `QLambda/Domain/QuantumRelComp.lean`

```
@[simp] theorem id_component_ne [DecidableEq X.Atom] {x y : X.Atom}
  (hxy : x != y) :
  (id X).component x y = False := by
  simp [id, hxy]
```

#### 4.4.1698 Monotonicity of the composition, in the left argument

**Statement.** For quantum relations  $S_1, S_2, R$ : if  $S_1 \leq S_2$ , then  $S_1.\text{comp } R \leq S_2.\text{comp } R$ .

**Proof.** Each component of the claim is established separately. It follows from standard identities for submodules.

**Lean 4 source** `QLambda/Domain/QuantumRelComp.lean`

```
theorem comp_mono_left {S_1 S_2 : QuantumRel Y Z} (R : QuantumRel X Y)
  (h : S_1 <= S_2) :
  S_1.comp R <= S_2.comp R := by
  intro x z
  refine iSup_mono ?_
  intro y
  apply Submodule.span_mono
  rintro _ <r, s, hr, hs, rfl>
  exact <r, s, hr, h y z hs, rfl>
```

#### 4.4.1699 Monotonicity of the composition, in the right argument

**Statement.** For quantum relations  $S, R_1, R_2$ : if  $R_1 \leq R_2$ , then  $S.\text{comp } R_1 \leq S.\text{comp } R_2$ .

**Proof.** Each component of the claim is established separately. It follows from standard identities for submodules.

#### Lean 4 source `QLambda/Domain/QuantumRelComp.lean`

```
theorem comp_mono_right {S : QuantumRel Y Z} {R_1 R_2 : QuantumRel X Y}
  (h : R_1 <= R_2) :
  S.comp R_1 <= S.comp R_2 := by
  intro x z
  refine iSup_mono ?_
  intro y
  apply Submodule.span_mono
  rintro _ <r, s, hr, hs, rfl>
  exact <r, s, h x y hr, hs, rfl>
```

#### 4.4.1700 Monotonicity of the composition

**Statement.** For quantum relations  $S_1, S_2, R_1, R_2$ : if  $S_1 \leq S_2$  and  $R_1 \leq R_2$ , then  $S_1 \cdot \text{comp } R_1 \leq S_2 \cdot \text{comp } R_2$ .

**Proof.** The proof term combines the facts named in it directly.

#### Lean 4 source `QLambda/Domain/QuantumRelComp.lean`

```
theorem comp_mono {S_1 S_2 : QuantumRel Y Z} {R_1 R_2 : QuantumRel X Y}
  (hS : S_1 <= S_2) (hR : R_1 <= R_2) :
  S_1.comp R_1 <= S_2.comp R_2 :=
  (comp_mono_left R_1 hS).trans (comp_mono_right hR)
```

#### 4.4.1701 Monotonicity of the adjoint

**Statement.** For quantum relations  $R, S$ : if  $R \leq S$ , then  $R.\text{dagger} \leq S.\text{dagger}$ .

**Proof.** Each component of the claim is established separately. It follows from standard identities for submodules.

#### Lean 4 source `QLambda/Domain/QuantumRelComp.lean`

```
theorem dagger_mono {R S : QuantumRel X Y} (h : R <= S) :
  R.dagger <= S.dagger := by
  intro y x
  apply Submodule.span_mono
  rintro _ <r, hr, rfl>
  exact <r, h x y hr, rfl>
```

#### 4.4.1702 Membership of an adjoint for quantum relations

**Statement.** For a quantum relation  $R$ : if  $r \in R.\text{component } x \ y$ , then  $r^\dagger \in R.\text{dagger}.\text{component } y \ x$ .

**Proof.** This is an instance of standard identities for submodules.

#### Lean 4 source `QLambda/Domain/QuantumRelComp.lean`

```
theorem mem_dagger {R : QuantumRel X Y} {x : X.Atom} {y : Y.Atom}
  {r : QuantumSet.Op X Y x y} (hr : r in R.component x y) :
  r? in R.dagger.component y x :=
```

```
Submodule.subset_span <r, hr, rfl>
```

#### 4.4.1703 Adjoint of an adjoint for quantum relations

**Statement.** For a quantum relation  $R$ : the adjoint equals  $R$ . Formally:  $R.dagger.dagger = R$ .

**Proof.** Both sides are compared pointwise (by extensionality). Equality is proved by showing both inequalities. The hypotheses are unpacked into their constituent data. The key step rewrites with standard identities for matrices, the extensionality for quantum relations, antisymmetry of the order and standard identities for submodules.

#### Lean 4 source `QLambda/Domain/QuantumRelComp.lean`

```
@[simp] theorem dagger_dagger (R : QuantumRel X Y) :
  R.dagger.dagger = R := by
  apply ext
  intro x y
  apply le_antisymm
  * apply Submodule.span_le.mpr
    rintro _ <s, hs, rfl>
    change s? in R.component x y
    refine Submodule.span_induction
      (p := fun t _ => t? in R.component x y)
      (fun _ ht => by
        obtain <r, hr, rfl> := ht
        simpa using hr)
      (by simp)
      (fun a b _ _ ha hb => by
        rw [Matrix.conjTranspose_add]
        exact add_mem ha hb)
      (fun c a _ ha => by
        rw [Matrix.conjTranspose_smul]
        exact Submodule.smul_mem _ (star c) ha)
    hs
  * intro r hr
    simpa using (mem_dagger (mem_dagger hr))
```

#### 4.4.1704 Adjoint of the membership of the span for quantum relations

**Statement.** For natural numbers  $n, m$ , a matrix  $a$ : if  $a \in \text{Submodule.span } \mathbb{C} s$ , then  $a^\dagger \in \text{Submodule.span } \mathbb{C} \{ b^\dagger \mid b \in s \}$ .

**Proof.** The key step rewrites with the usual algebraic identities, standard identities for matrices and standard identities for submodules.

#### Lean 4 source `QLambda/Domain/QuantumRelDagger.lean`

```
theorem adjoint_mem_span {n m : Nat}
  {s : Set (Matrix (Fin m) (Fin n) ?)}
  {a : Matrix (Fin m) (Fin n) ?}
  (ha : a in Submodule.span ? s) :
  a? in Submodule.span ? { b? | b in s } := by
  refine Submodule.span_induction
    (p := fun x _ => x? in Submodule.span ? { b? | b in s })
```

```

(fun b hb => Submodule.subset_span <b, hb, rfl>)
(by simp [conjTranspose_zero])
(fun x y _ _ hx hy => by
  rw [conjTranspose_add]
  exact add_mem hx hy)
(fun c x _ hx => by
  rw [Matrix.conjTranspose_smul]
  exact Submodule.smul_mem _ (star c) hx)
ha

```

#### 4.4.1705 Adjoint of the composite through for quantum relations

**Statement.** For quantum relations  $S, R$ :  $\text{Submodule.span } \mathbb{C} \{ v^\dagger \mid v \in S.\text{compThrough } R \ x \ y \ z \} \leq R.\text{dagger}.\text{compThrough } S.\text{dagger} \ z \ y \ x$ .

**Proof.** The hypotheses are unpacked into their constituent data. It follows from standard identities for submodules and the adjoint of a product.

#### Lean 4 source `QLambda/Domain/QuantumRelDagger.lean`

```

theorem dagger_compThrough (S : QuantumRel Y Z) (R : QuantumRel X Y)
  (x : X.Atom) (y : Y.Atom) (z : Z.Atom) :
  Submodule.span ? { v? | v in S.compThrough R x y z } <=
    R.dagger.compThrough S.dagger z y x := by
  apply Submodule.span_le.mpr
  rintro _ <v, hv, rfl>
  have hvadj := adjoint_mem_span (s :=
    { (s * r : QuantumSet.Op X Z x z) |
      (r : QuantumSet.Op X Y x y)
      (s : QuantumSet.Op Y Z y z)
      ( _ : r in R.component x y)
      ( _ : s in S.component y z) }) hv
  refine (Submodule.span_le.mpr ?_) hvadj
  rintro _ <w, hw, rfl>
  obtain <r, s, hr, hs, rfl> := hw
  refine Submodule.subset_span <s?, r?, mem_dagger hs, mem_dagger hr, ?_>
  exact (Matrix.conjTranspose_mul s r).symm

```

#### 4.4.1706 Adjoint of a composite for quantum relations

**Statement.** For quantum relations  $S, R$ :  $(S.\text{comp } R).\text{dagger}$  equals the composition of the adjoint of  $S$ .

**Proof.** Both sides are compared pointwise (by extensionality). Equality is proved by showing both inequalities. The hypotheses are unpacked into their constituent data. The key step rewrites with the definition of the composition, standard identities for submodules, the definition of the adjoint and the adjoint of a product.

#### Lean 4 source `QLambda/Domain/QuantumRelDagger.lean`

```

theorem dagger_comp (S : QuantumRel Y Z) (R : QuantumRel X Y) :
  (S.comp R).dagger = R.dagger.comp S.dagger := by
  apply ext

```

```

intro z x
apply le_antisymm
* apply Submodule.span_le.mpr
  rintro _ <u, hu, rfl>
  have hu' :
    u in Submodule.span ?
      (? y, (S.compThrough R x y z : Set _)) := by
        simpa [comp, Submodule.iSup_eq_span] using hu
  have hspan := adjoint_mem_span hu'
  refine (Submodule.span_le.mpr ?_) hspan
  rintro _ <v, hv, rfl>
  obtain <y, hv'> := Set.mem_iUnion.mp hv
  apply (le_iSup (fun y => R.dagger.compThrough S.dagger z y x) y)
  exact dagger_compThrough S R x y z (Submodule.subset_span <v, hv', rfl>)
* apply iSup_le
  intro y
  apply Submodule.span_le.mpr
  rintro _ <rFromS, sFromR, hrFromS, hsFromR, rfl>
  have hs' :
    sFromR in Submodule.span ?
      { r? | r in R.component x y } := by
        simpa [dagger] using hsFromR
  have hr' :
    rFromS in Submodule.span ?
      { s? | s in S.component y z } := by
        simpa [dagger] using hrFromS
  refine Submodule.span_induction_2
    (p := fun sa ra _ => sa * ra in (S.comp R).dagger.component z x)
    (fun rT sT hrT hsT => by
      obtain <r, hr, rfl> := hrT
      obtain <s, hs, rfl> := hsT
      rw [ <- Matrix.conjTranspose_mul ]
      exact mem_dagger
        (le_iSup (fun y => S.compThrough R x y z) y
          (Submodule.subset_span <r, s, hr, hs, rfl>)))
    (fun sa _ => by
      rw [Matrix.zero_mul]
      exact zero_mem _)
    (fun ra _ => by
      rw [Matrix.mul_zero]
      exact zero_mem _)
    (fun a b c _ _ ha hb => by
      rw [Matrix.add_mul]
      exact add_mem ha hb)
    (fun a b c _ _ ha hb => by
      rw [Matrix.mul_add]
      exact add_mem ha hb)
    (fun c ra sa _ _ h => by
      rw [Matrix.smul_mul c ra sa]
      exact Submodule.smul_mem _ c h)
    (fun c ra sa _ _ h => by
      rw [Matrix.mul_smul ra c sa]
      exact Submodule.smul_mem _ c h)
  hs' hr'

```



#### 4.4.1707 Definition of the multiplication right LM of quantum relations

**Definition.** The multiplication right LM of  $u$  is a matrix.

**Construction.** Constructed by supplying each component of the structure explicitly.

**Lean 4 source** [QLambda/Domain/QuantumRelDagger.lean](#)

```
def mulRightLM {n m p : Nat} (u : Matrix (Fin m) (Fin n) ?) :  
  Matrix (Fin p) (Fin m) ? -> ?[?] Matrix (Fin p) (Fin n) ? where  
  toFun t := t * u  
  map_add' := fun _ _ => Matrix.add_mul _ _ _  
  map_smul' := fun c t => Matrix.smul_mul c t u
```

#### 4.4.1708 Definition of the multiplication left LM of quantum relations

**Definition.** The multiplication left LM of  $t$  is a matrix.

**Construction.** Constructed by supplying each component of the structure explicitly.

**Lean 4 source** [QLambda/Domain/QuantumRelDagger.lean](#)

```
def mulLeftLM {n m p : Nat} (t : Matrix (Fin p) (Fin m) ?) :  
  Matrix (Fin m) (Fin n) ? -> ?[?] Matrix (Fin p) (Fin n) ? where  
  toFun u := t * u  
  map_add' := fun _ _ => Matrix.mul_add _ _ _  
  map_smul' := fun c u => Matrix.mul_smul t c u
```

#### 4.4.1709 The identity is a left unit for composition for quantum relations

**Statement.** For a quantum relation  $R$ :  $(\text{id } Y). \text{comp } R = R$ . Formally:  $(\text{id } Y). \text{comp } R = R$ .

**Proof.** Both sides are compared pointwise (by extensionality). Equality is proved by showing both inequalities. The argument splits on the relevant condition. The hypotheses are unpacked into their constituent data. An equation between variables is used to substitute one for the other. The key step rewrites with standard identities for matrices, standard identities for submodules and the extensionality for bilinear maps.

**Lean 4 source** [QLambda/Domain/QuantumRelDagger.lean](#)

```
theorem id_comp [DecidableEq Y.Atom] (R : QuantumRel X Y) :  
  (id Y).comp R = R := by  
  apply ext  
  intro x z  
  apply le_antisymm  
  * apply iSup_le  
    intro y  
    apply Submodule.span_le.mpr  
    rintro m <r, s, hr, hs, rfl>  
    by_cases hyz : y = z  
    * subst z  
      have hs' :  
        s in Submodule.span ?  
          {(1 : Matrix (Fin (Y.dim y)) (Fin (Y.dim y)) ?)} := by  
        simpa [id] using hs
```

```

obtain <c, hc> := Submodule.mem_span_singleton.mp hs'
have : s * r = c * r := by
  rw [ <- hc, Matrix.smul_mul, Matrix.one_mul]
  rw [this]
exact Submodule.smul_mem _ c hr
* have : s in (False : OpSpace Y Y y z) := by
  simp [id, hyz] using hs
  have hs0 : s = 0 := by
    simp [Submodule.mem_bot] using this
  rw [hs0, Matrix.zero_mul]
  exact zero_mem _
* refine le_trans ?_ (le_iSup (fun y => (id Y).compThrough R x y z) z)
intro m hm
refine Submodule.subset_span
  <m, (1 : Matrix (Fin (Y.dim z)) (Fin (Y.dim z)) ?), hm, ?_,
  Matrix.one_mul m>
simp [id]

```

#### 4.4.1710 Composition of an identity

**Statement.** For a quantum relation  $R$ : the composition of the identity of  $X$  equals  $R$ .

**Proof.** Both sides are compared pointwise (by extensionality). Equality is proved by showing both inequalities. The argument splits on the relevant condition. The hypotheses are unpacked into their constituent data. An equation between variables is used to substitute one for the other. The key step rewrites with standard identities for matrices, standard identities for submodules and the extensionality for bilinear maps.

#### Lean 4 source `QLambda/Domain/QuantumRelDagger.lean`

```

theorem comp_id [DecidableEq X.Atom] (R : QuantumRel X Y) :
  R.comp (id X) = R := by
  apply ext
  intro x z
  apply le_antisymm
  * apply iSup_le
    intro y
    apply Submodule.span_le.mpr
    rintro m <r, s, hr, hs, rfl>
    by_cases hxy : x = y
    * subst y
      have hr' :
        r in Submodule.span ?
          {(1 : Matrix (Fin (X.dim x)) (Fin (X.dim x)) ?)} := by
          simp [id] using hr
      obtain <c, hc> := Submodule.mem_span_singleton.mp hr'
      have : s * r = c * s := by
        rw [ <- hc, Matrix.mul_smul, Matrix.mul_one]
      rw [this]
      exact Submodule.smul_mem _ c hs
    * have : r in (False : OpSpace X X x y) := by
      simp [id, hxy] using hr
      have hr0 : r = 0 := by
        simp [Submodule.mem_bot] using this
      rw [hr0, Matrix.mul_zero]

```

```

    exact zero_mem _
* refine le_trans ?_ (le_iSup (fun y => R.compThrough (id X) x y z) x)
intro m hm
refine Submodule.subset_span
  <(1 : Matrix (Fin (X.dim x)) (Fin (X.dim x)) ?), m, ?_, hm,
    Matrix.mul_one m>
simp [id]

```

#### 4.4.1711 Associativity of composition for quantum relations

**Statement.** For quantum relations  $T, S, R$ :  $(T.\text{comp } S).\text{comp } R$  equals the composition of the composition of  $R$ .

**Proof.** Both sides are compared pointwise (by extensionality). Equality is proved by showing both inequalities. The key step rewrites with standard identities for submodules, the definition of the composite through and associativity of matrix multiplication.

#### Lean 4 source `QLambda/Domain/QuantumRelDagger.lean`

```

theorem assoc (T : QuantumRel Z W) (S : QuantumRel Y Z) (R : QuantumRel X Y) :
  (T.comp S).comp R = T.comp (S.comp R) := by
  apply ext
  intro x w
  apply le_antisymm
  * apply iSup_le
    intro y
    apply Submodule.span_le.mpr
    rintro m <r, t, hr, ht, rfl>
    have : t * r in
      Submodule.map (mulRightLM (p := W.dim w) r)
        ((T.comp S).component y w) :=
      Submodule.mem_map.mpr <t, ht, rfl>
    rw [show (T.comp S).component y w = bigcup z, T.compThrough S y z w from rfl,
      Submodule.map_iSup] at this
    refine (iSup_le (fun z => ?_) : _ <= (T.comp (S.comp R)).component x w) this
    dsimp only [compThrough]
    rw [Submodule.map_span]
    apply Submodule.span_le.mpr
    rintro _ <_, <s, t', hs, ht', rfl>, rfl>
    change (t' * s) * r in (T.comp (S.comp R)).component x w
    rw [Matrix.mul_assoc]
    apply (le_iSup (fun z => T.compThrough (S.comp R) x z w) z)
    refine Submodule.subset_span <s * r, t', ?_, ht', rfl>
    apply (le_iSup (fun y => S.compThrough R x y z) y)
    exact Submodule.subset_span <r, s, hr, hs, rfl>
  * apply iSup_le
    intro z
    apply Submodule.span_le.mpr
    rintro m <u, t, hu, ht, rfl>
    have : t * u in
      Submodule.map (mulLeftLM (n := X.dim x) t)
        ((S.comp R).component x z) :=
      Submodule.mem_map.mpr <u, hu, rfl>
    rw [show (S.comp R).component x z = bigcup y, S.compThrough R x y z from rfl,
      Submodule.map_iSup] at this

```

```

refine (iSup_le (fun y => ?_) : _ <= ((T.comp S).comp R).component x w) this
dsimp only [compThrough]
rw [Submodule.map_span]
apply Submodule.span_le.mpr
rintro _ <_, <r, s, hr, hs, rfl>, rfl>
change t * (s * r) in ((T.comp S).comp R).component x w
rw [ <- Matrix.mul_assoc]
apply (le_iSup (fun y => (T.comp S).compThrough R x y w) y)
refine Submodule.subset_span <r, t * s, hr, ?_, rfl>
apply (le_iSup (fun z => T.compThrough S y z w) z)
exact Submodule.subset_span <s, t, hs, ht, rfl>

```

#### 4.4.1712 Identity of an adjoint for quantum relations

**Statement.**  $(\text{id } X).dagger$  equals the identity of  $X$ . Formally:  $(\text{id } X).dagger = \text{id } X$ .

**Proof.** Both sides are compared pointwise (by extensionality). Equality is proved by showing both inequalities. The argument splits on the relevant condition. The hypotheses are unpacked into their constituent data. An equation between variables is used to substitute one for the other. The key step rewrites with standard identities for matrices and the usual algebraic identities.

#### Lean 4 source `QLambda/Domain/QuantumRelDagger.lean`

```

theorem id_dagger [DecidableEq X.Atom] : (id X).dagger = id X := by
  apply ext
  intro y x
  by_cases hxy : x = y
  * subst y
  apply le_antisymm
  * apply Submodule.span_le.mpr
    rintro _ <r, hr, rfl>
    have hr' :
      r in Submodule.span ?
        {(1 : Matrix (Fin (X.dim x)) (Fin (X.dim x)) ?)} := by
      simpa [id] using hr
    obtain <c, hc> := Submodule.mem_span_singleton.mp hr'
    have : r? = star c * (1 : Matrix (Fin (X.dim x)) (Fin (X.dim x)) ?) := by
      rw [ <- hc, Matrix.conjTranspose_smul, conjTranspose_one]
    rw [this]
    simp [id]
    exact Submodule.smul_mem _ _ (Submodule.subset_span (Set.mem_singleton _))
  * intro m hm
    have hm' :
      m in Submodule.span ?
        {(1 : Matrix (Fin (X.dim x)) (Fin (X.dim x)) ?)} := by
      simpa [id] using hm
    obtain <c, hc> := Submodule.mem_span_singleton.mp hm'
    refine Submodule.subset_span <star c * (1 : Matrix (Fin (X.dim x)) (Fin (X.dim x)
    )) ?), ?_, ?_>
    * simp [id]
      exact Submodule.smul_mem _ _ (Submodule.subset_span (Set.mem_singleton _))
    * rw [Matrix.conjTranspose_smul, conjTranspose_one, star_star, hc]
  * have hne : y != x := Ne.symm hxy
    simp [id, dagger, hxy, hne]

```

#### 4.4.1713 Conjugation by a unitary on an atomic quantum set

**Definition.** Conjugation by a unitary on an atomic quantum set.

**Construction.** Constructed by supplying each component of the structure explicitly.

**Lean 4 source** `QLambda/Domain/QuantumRelExamples.lean`

```
def ofUnitary {n : Nat}
  (U : Matrix (Fin n) (Fin n) ?) : QuantumRel (.atomic n) (.atomic n) where
  component _ _ := Submodule.span ? {U}
```

#### 4.4.1714 Map induced by a unitary of an adjoint for quantum relations

**Statement.** For a natural number  $n$ , a matrix  $U$ :  $(\text{ofUnitary } U) \cdot \text{dagger}$  equals the map induced by the unitary  $U^H$ .

**Proof.** Both sides are compared pointwise (by extensionality). Equality is proved by showing both inequalities. The hypotheses are unpacked into their constituent data. The key step rewrites with the extensionality for bilinear maps, antisymmetry of the order, standard identities for submodules and standard identities for matrices.

**Lean 4 source** `QLambda/Domain/QuantumRelExamples.lean`

```
theorem ofUnitary_dagger {n : Nat} (U : Matrix (Fin n) (Fin n) ?) :
  (ofUnitary U).dagger = ofUnitary U? := by
  apply ext
  intro x y
  apply le_antisymm
  * apply Submodule.span_le.mpr
    rintro _ <r, hr, rfl>
    obtain <c, hc> := Submodule.mem_span_singleton.mp hr
    have : r? = star c * U? := by
      rw [← hc]
      exact Matrix.conjTranspose_smul (R := ?) (M := U) c
    rw [this]
    exact Submodule.smul_mem _ _ (Submodule.subset_span (Set.mem_singleton _))
  * apply Submodule.span_le.mpr
    rintro m rfl
    refine Submodule.subset_span <U, Submodule.subset_span (Set.mem_singleton _), rfl>
```

#### 4.4.1715 Map induced by a unitary of a composite for quantum relations

**Statement.** For a natural number  $n$ , matrixes  $S, R$ :  $(\text{ofUnitary } S) \cdot \text{comp } (\text{ofUnitary } R)$  equals the map induced by the unitary the product of  $S$  and  $R$ .

**Proof.** Both sides are compared pointwise (by extensionality). Equality is proved by showing both inequalities. The claim follows from a chain of equalities (or inequalities). The hypotheses are unpacked into their constituent data. The key step rewrites with the definition of the composition, standard identities for matrices, the extensionality for bilinear maps and antisymmetry of the order.

**Lean 4 source** `QLambda/Domain/QuantumRelExamples.lean`

```

theorem ofUnitary_comp {n : Nat}
  (S R : Matrix (Fin n) (Fin n) ?) :
  (ofUnitary S).comp (ofUnitary R) = ofUnitary (S * R) := by
  apply ext
  intro x z
  simp only [comp]
  trans (ofUnitary S).compThrough (ofUnitary R) x
    (default : (QuantumSet.atomic n).Atom) z
  * exact iSup_unique
    (f := fun y : (QuantumSet.atomic n).Atom =>
      (ofUnitary S).compThrough (ofUnitary R) x y z)
  apply le_antisymm
  * apply Submodule.span_le.mpr
    rintro _ <r, s, hr, hs, rfl>
    obtain <c, hc> := Submodule.mem_span_singleton.mp hr
    obtain <d, hd> := Submodule.mem_span_singleton.mp hs
    have : s * r = (d * c) * (S * R) := by
      rw [← hc, ← hd]
      calc
        (d * S) * (c * R)
          = d * (S * (c * R)) := Matrix.smul_mul d S (c * R)
        _ = d * (c * (S * R)) := by rw [Matrix.mul_smul]
        _ = (d * c) * (S * R) := smul_smul d c (S * R)
    rw [this]
    exact Submodule.smul_mem _ _ (Submodule.subset_span (Set.mem_singleton _))
  * apply Submodule.span_le.mpr
    rintro m rfl
    refine Submodule.subset_span <R, S,
      Submodule.subset_span (Set.mem_singleton _),
      Submodule.subset_span (Set.mem_singleton _), rfl>

```

#### 4.4.1716 Map induced by a unitary of one for quantum relations

**Statement.** For a natural number  $n$ : the map induced by the unitary  $1 : \text{Matrix } (\text{Fin } n) (\text{Fin } n)$   $\mathbb{C}$  equals the identity of the atomic quantum set of  $n$ .

**Proof.** Both sides are compared pointwise (by extensionality). An equation between variables is used to substitute one for the other. The goal is simplified using the definition of the map induced by a unitary, the extensionality for bilinear maps and the formula for the identity of the component.

#### Lean 4 source `QLambda/Domain/QuantumRelExamples.lean`

```

theorem ofUnitary_one {n : Nat} :
  ofUnitary (1 : Matrix (Fin n) (Fin n) ?) = id (.atomic n) := by
  apply ext
  intro x y
  have hx : x = default := Subsingleton.elim _ _
  have hy : y = default := Subsingleton.elim _ _
  subst hx
  subst hy
  simp only [ofUnitary]
  exact (id_component_eq (default : (QuantumSet.atomic n).Atom)).symm

```

#### 4.4.1717 Map induced by a unitary of the functionality for quantum relations

**Statement.** For a natural number  $n$ , a matrix  $U$ : if  $U^\dagger * U = 1$  and  $U * U^\dagger = 1$ , then `ofUnitary U` is functional.

**Proof.** Each component of the claim is established separately. The key step rewrites with the map induced by a unitary of an adjoint for quantum relations, the map induced by a unitary of a composite for quantum relations, the hypothesis that  $U * U^\dagger = 1$  and the map induced by a unitary of one for quantum relations.

**Lean 4 source** `QLambda/Domain/QuantumRelExamples.lean`

```
theorem ofUnitary_isFunction {n : Nat}
  (U : Matrix (Fin n) (Fin n) ?)
  (hL : U? * U = 1) (hR : U * U? = 1) :
  (ofUnitary U).IsFunction := by
  constructor
  * rw [ofUnitary_dagger, ofUnitary_comp, hR, ofUnitary_one]
  * rw [ofUnitary_dagger, ofUnitary_comp, hL, ofUnitary_one]
```

#### 4.4.1718 Computational-basis bras used to present measurement as a function

**Definition.** Computational-basis bras used to present measurement as a function.

**Construction.** Defined to be `!![1, 0]`.

**Lean 4 source** `QLambda/Domain/QuantumRelExamples.lean`

```
def bra0 : KrausOperator 2 1 :=
  !![(1 : ?), 0]
```

#### 4.4.1719 Definition of the bra 1 of quantum relations

**Definition.** The bra 1 is an element of `KrausOperator 2 1`.

**Construction.** Defined to be `!![0, 1]`.

**Lean 4 source** `QLambda/Domain/QuantumRelExamples.lean`

```
def bra1 : KrausOperator 2 1 :=
  !![(0 : ?), 1]
```

#### 4.4.1720 Computational-basis measurement of one qubit

**Definition.** Computational-basis measurement of one qubit.

**Construction.** Constructed by supplying each component of the structure explicitly.

**Lean 4 source** `QLambda/Domain/QuantumRelExamples.lean`

```
def qubitMeasure : QuantumRel .qubit .bit where
  component _
  | false => Submodule.span ? {bra0}
  | true  => Submodule.span ? {bra1}
```

#### 4.4.1721 A projection-valued measurement from an atomic system onto a classical finite set

**Definition.** A projection-valued measurement from an atomic system onto a classical finite set. The component at outcome  $b$  is the operators that factor through the corresponding projector.

**Construction.** Constructed by supplying each component of the structure explicitly.

##### Lean 4 source `QLambda/Domain/QuantumRelExamples.lean`

```
def ofPVM {n : Nat} {a : Type} [Fintype a]
  (? : a → Matrix (Fin n) (Fin n) ?) :
  QuantumRel (.atomic n) (.liftSet a) where
  component _ b :=
    Submodule.span ?
      { (v : KrausOperator n 1) | v * (1 - ? b) = 0 }
```

#### 4.4.1722 The zero-state allocation channel $1 \rightarrow \text{qubit}$

**Definition.** The zero-state allocation channel  $1 \rightarrow \text{qubit}$ .

**Construction.** Constructed by supplying each component of the structure explicitly.

##### Lean 4 source `QLambda/Domain/QuantumRelExamples.lean`

```
def new0 : QuantumRel .unit .qubit where
  component _ _ :=
    Submodule.span ? {!![(1 : ?); 0]}
```

#### 4.4.1723 The function respects order

**Statement.** For quantum relations  $F, G$ : if  $F$  is functional;  $G$  is functional; and  $F \leq G$ , then  $F = G$ .

**Proof.** Equality is proved by showing both inequalities. It follows from antisymmetry of the order.

##### Lean 4 source `QLambda/Domain/QuantumRelFunction.lean`

```
theorem function_eq_of_le [DecidableEq X.Atom] [DecidableEq Y.Atom]
  {F G : QuantumRel X Y} (hF : F.IsFunction) (hG : G.IsFunction)
  (hFG : F <= G) : F = G := by
  apply le_antisymm hFG
  have h1 : G = G.comp (id X) := (comp_id G).symm
  have h2 : G.comp (id X) <= G.comp (F.dagger.comp F) :=
    comp_mono_right hF.2
  have h3 : G.comp (F.dagger.comp F) = (G.comp F.dagger).comp F :=
    (assoc G F.dagger F).symm
  have h4 : G.comp F.dagger <= G.comp G.dagger :=
    comp_mono_right (dagger_mono hFG)
  have h5 : (G.comp F.dagger).comp F <= (id Y).comp F :=
    comp_mono_left F (h4.trans hG.1)
  have h6 : (id Y).comp F = F := id_comp F
  exact h1.trans_le (h2.trans (h3.le.trans (h5.trans h6.le)))
```



#### 4.4.1724 Composition for functional quantum relations

**Statement.** For quantum relations  $S, R$ : if  $S$  is functional and  $R$  is functional, then  $S \cdot \text{comp } R$  is functional.

**Proof.** The claim follows from a chain of equalities (or inequalities). Each component of the claim is established separately. The key step rewrites with the adjoint of a composite for quantum relations, the associativity of composition for quantum relations and the fact that the identity is a left unit for composition for  $\omega$ -continuous maps.

#### Lean 4 source `QLambda/Domain/QuantumRelFunction.lean`

```
theorem IsFunction.comp [DecidableEq X.Atom] [DecidableEq Y.Atom]
  [DecidableEq Z.Atom] {S : QuantumRel Y Z} {R : QuantumRel X Y}
  (hS : S.IsFunction) (hR : R.IsFunction) :
  (S.comp R).IsFunction := by
  constructor
  * calc
    (S.comp R).comp (S.comp R).dagger
      = (S.comp R).comp (R.dagger.comp S.dagger) := by
        rw [dagger_comp]
    _ = S.comp ((R.comp R.dagger).comp S.dagger) := by
        rw [ <- assoc (S.comp R) R.dagger S.dagger,
            assoc S R R.dagger,
            assoc S (R.comp R.dagger) S.dagger]
    _ <= S.comp ((id Y).comp S.dagger) :=
        comp_mono_right (comp_mono_left S.dagger hR.1)
    _ = S.comp S.dagger := by
        rw [id_comp]
    _ <= id Z := hS.1
  * have hRle : R <= S.dagger.comp (S.comp R) := by
    calc
      R = (id Y).comp R := (id_comp R).symm
    _ <= (S.dagger.comp S).comp R :=
        comp_mono_left R hS.2
    _ = S.dagger.comp (S.comp R) := assoc _ _ _
  calc
    id X <= R.dagger.comp R := hR.2
    _ <= R.dagger.comp (S.dagger.comp (S.comp R)) :=
        comp_mono_right hRle
    _ = (R.dagger.comp S.dagger).comp (S.comp R) :=
        (assoc _ _ _).symm
    _ = (S.comp R).dagger.comp (S.comp R) := by
        rw [ <- dagger_comp]
```

#### 4.4.1725 Right composition by a quantum function preserves countable meets

**Statement.** Right composition by a quantum function preserves countable meets. This is the relational algebra lemma used in the qCPO limit proofs. Formally:  $(\bigcap n, S \cdot n) \cdot \text{comp } F = \bigcap n, (S \cdot n) \cdot \text{comp } F$ .

**Proof.** Equality is proved by showing both inequalities. The claim follows from a chain of equalities (or inequalities). It follows from antisymmetry of the order and the monotonicity of the composition of the monotonicity.

#### Lean 4 source `QLambda/Domain/QuantumRelFunction.lean`

```

theorem iInf_comp_of_function [DecidableEq X.Atom] [DecidableEq Y.Atom]
  (S : Nat -> QuantumRel Y Z) (F : QuantumRel X Y) (hF : F.IsFunction) :
  (? n, S n).comp F = ? n, (S n).comp F := by
  apply le_antisymm
  * apply le_iInf
    intro n
    exact comp_mono_left F (iInf_le S n)
  * let T : QuantumRel X Z := ? n, (S n).comp F
    have hTF : T.comp F.dagger <= ? n, S n := by
      apply le_iInf
      intro n
      calc
        T.comp F.dagger <= ((S n).comp F).comp F.dagger :=
          comp_mono_left F.dagger (iInf_le (fun n => (S n).comp F) n)
        _ = (S n).comp (F.comp F.dagger) := assoc _ _ _
        _ <= (S n).comp (id Y) := comp_mono_right hF.1
        _ = S n := comp_id _
    change T <= (? n, S n).comp F
    calc
      T = T.comp (id X) := (comp_id T).symm
      _ <= T.comp (F.dagger.comp F) := comp_mono_right hF.2
      _ = (T.comp F.dagger).comp F := (assoc _ _ _).symm
      _ <= (? n, S n).comp F := comp_mono_left F hTF

```

#### 4.4.1726 Square isometries over $\mathbb{C}$ are unitaries

**Statement.** Square isometries over  $\mathbb{C}$  are unitaries. Formally:  $U * U^\dagger = 1$ .

**Proof.** The proof term combines the facts named in it directly.

**Lean 4 source** [QLambda/Domain/QuantumRelational.lean](#)

```

theorem unitary_of_isometry {n : Nat} (U : Matrix (Fin n) (Fin n) ?)
  (h : U? * U = 1) : U * U? = 1 :=
  (mul_eq_one_comm (a := U?) (b := U)).mp h

```

#### 4.4.1727 Hadamard as a quantum function on the discrete qubit

**Definition.** Hadamard as a quantum function on the discrete qubit.

**Construction.** Defined to be the map induced by the unitary the Hadamard matrix at 0.

**Lean 4 source** [QLambda/Domain/QuantumRelational.lean](#)

```

noncomputable def h : QuantumRel .qubit .qubit :=
  QuantumRel.ofUnitary (hMatrix (0 : Fin 1))

```

#### 4.4.1728 Pauli-X as a quantum function on the discrete qubit

**Definition.** Pauli-X as a quantum function on the discrete qubit.

**Construction.** Defined to be the map induced by the unitary the Pauli-X matrix at 0.

**Lean 4 source** [QLambda/Domain/QuantumRelational.lean](#)

```
noncomputable def x : QuantumRel .qubit .qubit :=
  QuantumRel.ofUnitary (xMatrix (0 : Fin 1))
```

#### 4.4.1729 T as a quantum function on the discrete qubit

**Definition.** T as a quantum function on the discrete qubit.

**Construction.** Defined to be the map induced by the unitary the T-gate matrix at 0.

**Lean 4 source** [QLambda/Domain/QuantumRelational.lean](#)

```
noncomputable def t : QuantumRel .qubit .qubit :=
  QuantumRel.ofUnitary (tMatrix (0 : Fin 1))
```

#### 4.4.1730 Rational-angle RY as a quantum function on the discrete qubit

**Definition.** Rational-angle RY as a quantum function on the discrete qubit.

**Construction.** Defined to be the map induced by the unitary the Y-rotation matrix of  $\theta$  at 0.

**Lean 4 source** [QLambda/Domain/QuantumRelational.lean](#)

```
noncomputable def ry (? : ?) : QuantumRel .qubit .qubit :=
  QuantumRel.ofUnitary (ryMatrix (? : ?) (0 : Fin 1))
```

#### 4.4.1731 Saturated CX as a quantum function on a four-dimensional atom, isomorphic to the two-qubit tensor

**Definition.** Saturated CX as a quantum function on a four-dimensional atom, isomorphic to the two-qubit tensor.

**Construction.** Defined to be the map induced by the unitary the controlled-NOT matrix at 0, 1.

**Lean 4 source** [QLambda/Domain/QuantumRelational.lean](#)

```
noncomputable def cx : QuantumRel (.atomic 4) (.atomic 4) :=
  QuantumRel.ofUnitary (cxMatrix (0 : Fin 2) (1 : Fin 2))
```

#### 4.4.1732 Computational-basis measurement, as a relation from the qubit to the classical bit

**Definition.** Computational-basis measurement, as a relation from the qubit to the classical bit.

**Construction.** Defined to be the qubit measurement.

**Lean 4 source** [QLambda/Domain/QuantumRelational.lean](#)

```
def measure : QuantumRel .qubit .bit :=
  QuantumRel.qubitMeasure
```

#### 4.4.1733 Fresh $|0\rangle$ allocation

**Definition.** Fresh  $|0\rangle$  allocation. This is an isometry-shaped relation, not a Weaver function into the two-dimensional atom.

**Construction.** Defined to be the fresh zero-qubit allocation.

**Lean 4 source** `QLambda/Domain/QuantumRelational.lean`

```
def new0 : QuantumRel .unit .qubit :=
  QuantumRel.new0
```

#### 4.4.1734 Hadamard gate of the functionality for circuit embeddings

**Statement.**  $h$  is functional. Formally:  $h.IsFunction$ .

**Proof.** This is an instance of the map induced by a unitary of the functionality for quantum relations.

**Lean 4 source** `QLambda/Domain/QuantumRelational.lean`

```
theorem h_isFunction : h.IsFunction :=
  QuantumRel.ofUnitary_isFunction _
    (hMatrix_isometry (0 : Fin 1))
    (unitary_of_isometry _ (hMatrix_isometry (0 : Fin 1)))
```

#### 4.4.1735 Pauli-X gate of the functionality for circuit embeddings

**Statement.**  $x$  is functional. Formally:  $x.IsFunction$ .

**Proof.** This is an instance of the map induced by a unitary of the functionality for quantum relations.

**Lean 4 source** `QLambda/Domain/QuantumRelational.lean`

```
theorem x_isFunction : x.IsFunction :=
  QuantumRel.ofUnitary_isFunction _
    (xMatrix_isometry (0 : Fin 1))
    (unitary_of_isometry _ (xMatrix_isometry (0 : Fin 1)))
```

#### 4.4.1736 T gate of the functionality for circuit embeddings

**Statement.**  $t$  is functional. Formally:  $t.IsFunction$ .

**Proof.** This is an instance of the map induced by a unitary of the functionality for quantum relations.

**Lean 4 source** `QLambda/Domain/QuantumRelational.lean`

```
theorem t_isFunction : t.IsFunction :=
  QuantumRel.ofUnitary_isFunction _
    (tMatrix_isometry (0 : Fin 1))
    (unitary_of_isometry _ (tMatrix_isometry (0 : Fin 1)))
```

#### 4.4.1737 Y-rotation gate of the functionality for circuit embeddings

**Statement.** For a rational number  $\theta$ :  $\text{ry } \theta$  is functional. Formally:  $(\text{ry } \theta). \text{IsFunction}$ .

**Proof.** This is an instance of the map induced by a unitary of the functionality for quantum relations.

**Lean 4 source** [QLambda/Domain/QuantumRelational.lean](#)

```
theorem ry_isFunction (? : ?) : (ry ?).IsFunction :=
  QuantumRel.ofUnitary_isFunction _
    (ryMatrix_isometry (? : ?) (0 : Fin 1))
    (unitary_of_isometry _ (ryMatrix_isometry (? : ?) (0 : Fin 1)))
```

#### 4.4.1738 Controlled-NOT gate of the functionality for circuit embeddings

**Statement.**  $\text{cx}$  is functional. Formally:  $\text{cx}. \text{IsFunction}$ .

**Proof.** This is an instance of the map induced by a unitary of the functionality for quantum relations.

**Lean 4 source** [QLambda/Domain/QuantumRelational.lean](#)

```
theorem cx_isFunction : cx.IsFunction :=
  QuantumRel.ofUnitary_isFunction _
    (cxMatrix_isometry (0 : Fin 2) (1 : Fin 2))
    (unitary_of_isometry _ (cxMatrix_isometry (0 : Fin 2) (1 : Fin 2)))
```

#### 4.4.1739 Discrete-qubit Hadamard as a monotone quantum function

**Definition.** Discrete-qubit Hadamard as a monotone quantum function.

**Construction.** Constructed by supplying each component:  $\text{rel}$ , functionality and monotonicity. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/QuantumRelational.lean](#)

```
noncomputable def hFun : QuantumFunction .qubit .qubit where
  rel := h
  isFunction := h_isFunction
  monotone := by
    change h.comp (QuantumRel.id .qubit) <= (QuantumRel.id .qubit).comp h
    rw [QuantumRel.comp_id, QuantumRel.id_comp]
```

#### 4.4.1740 Definition of the x fun of circuit embeddings

**Definition.** The  $\text{x fun}$  is a quantum function.

**Construction.** Constructed by supplying each component:  $\text{rel}$ , functionality and monotonicity. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/QuantumRelational.lean](#)

```
noncomputable def xFun : QuantumFunction .qubit .qubit where
  rel := x
  isFunction := x_isFunction
  monotone := by
```

```
change x.comp (QuantumRel.id .qubit) <= (QuantumRel.id .qubit).comp x
rw [QuantumRel.comp_id, QuantumRel.id_comp]
```

#### 4.4.1741 Definition of the $t$ fun of circuit embeddings

**Definition.** The  $t$  fun is a quantum function.

**Construction.** Constructed by supplying each component:  $rel$ , functionality and monotonicity. The accompanying laws are verified from the definitions.

##### Lean 4 source `QLambda/Domain/QuantumRelational.lean`

```
noncomputable def tFun : QuantumFunction .qubit .qubit where
  rel := t
  isFunction := t_isFunction
  monotone := by
    change t.comp (QuantumRel.id .qubit) <= (QuantumRel.id .qubit).comp t
    rw [QuantumRel.comp_id, QuantumRel.id_comp]
```

#### 4.4.1742 The first-order CP presentation of a unitary quantum function is the singleton Kraus family

**Definition.** The first-order CP presentation of a unitary quantum function is the singleton Kraus family.

**Construction.** Defined to be the CP map with Kraus family  $[U]$ .

##### Lean 4 source `QLambda/Domain/QuantumRelational.lean`

```
noncomputable def completedCP_ofUnitary {n : Nat}
  (U : Matrix (Fin n) (Fin n) ?) :
  CompletedCP n n :=
  CompletedCP.ofKraus [U]
```

#### 4.4.1743 Completed CP class of the map induced by a unitary of the Hadamard gate

**Statement.** The completed CP of unitarity of the Hadamard matrix at 0 equals the Hadamard gate on wire 0.

**Proof.** By definition. Unfolding the completed CP of unitarity turns the left-hand side, the completed CP of unitarity of the Hadamard matrix at 0, into the right-hand side, the Hadamard gate on wire 0; the two sides are the same term.

##### Lean 4 source `QLambda/Domain/QuantumRelational.lean`

```
@[simp] theorem completedCP_ofUnitary_h :
  completedCP_ofUnitary (hMatrix (0 : Fin 1)) = CompletedCP.h (0 : Fin 1) :=
  rfl
```

#### 4.4.1744 Completed CP class of the map induced by a unitary of the Pauli-X gate

**Statement.** The completed CP of unitarity of the Pauli-X matrix at 0 equals the Pauli-X gate on wire 0.

**Proof.** By definition. Unfolding the completed CP of unitarity turns the left-hand side, the completed CP of unitarity of the Pauli-X matrix at 0, into the right-hand side, the Pauli-X gate on wire 0; the two sides are the same term.

**Lean 4 source** [QLambda/Domain/QuantumRelational.lean](#)

```
@[simp] theorem completedCP_ofUnitary_x :
  completedCP_ofUnitary (xMatrix (0 : Fin 1)) = CompletedCP.x (0 : Fin 1) :=
  rfl
```

#### 4.4.1745 Completed CP class of the map induced by a unitary of the T gate

**Statement.** The completed CP of unitarity of the T-gate matrix at 0 equals the T gate on wire 0.

**Proof.** By definition. Unfolding the completed CP of unitarity turns the left-hand side, the completed CP of unitarity of the T-gate matrix at 0, into the right-hand side, the T gate on wire 0; the two sides are the same term.

**Lean 4 source** [QLambda/Domain/QuantumRelational.lean](#)

```
@[simp] theorem completedCP_ofUnitary_t :
  completedCP_ofUnitary (tMatrix (0 : Fin 1)) = CompletedCP.t (0 : Fin 1) :=
  rfl
```

#### 4.4.1746 Completed CP class of the map induced by a unitary of the Y-rotation gate

**Statement.** For a rational number  $\theta$ : the completed CP of unitarity of the Y-rotation matrix of  $\theta$  at 0 equals the Y-rotation by angle  $\theta$  on wire 0.

**Proof.** By definition. Unfolding the completed CP of unitarity turns the left-hand side, the completed CP of unitarity of the Y-rotation matrix of  $\theta$  at 0, into the right-hand side, the Y-rotation by angle  $\theta$  on wire 0; the two sides are the same term.

**Lean 4 source** [QLambda/Domain/QuantumRelational.lean](#)

```
@[simp] theorem completedCP_ofUnitary_ry (? : ?) :
  completedCP_ofUnitary (ryMatrix (? : ?) (0 : Fin 1)) =
  CompletedCP.ry ? (0 : Fin 1) :=
  rfl
```

#### 4.4.1747 Completed CP class of the map induced by a unitary of the controlled-NOT gate

**Statement.** The completed CP of unitarity of the controlled-NOT matrix at 0, 1 equals the controlled-NOT gate with control 0 and target 1.

**Proof.** By definition. Unfolding the completed CP of unitarity turns the left-hand side, the completed CP of unitarity of the controlled-NOT matrix at 0, 1, into the right-hand side, the controlled-NOT gate with control 0 and target 1; the two sides are the same term.

**Lean 4 source** [QLambda/Domain/QuantumRelational.lean](#)

```
@[simp] theorem completedCP_ofUnitary_cx :
  completedCP_ofUnitary (cxMatrix (0 : Fin 2) (1 : Fin 2)) =
    CompletedCP.cx (0 : Fin 2) (1 : Fin 2) :=
  rfl
```

#### 4.4.1748 A quantum set is a family of finite-dimensional Hilbert spaces

**Definition.** A quantum set is a family of finite-dimensional Hilbert spaces.

**Construction.** An element consists of `Atom` and `dim`.

**Lean 4 source** [QLambda/Domain/QuantumSet.lean](#)

```
structure QuantumSet where
  Atom : Type
  dim : Atom -> Nat
```

#### 4.4.1749 The Hilbert space of one atom, identified with $\mathbb{C}^n$

**Definition.** The Hilbert space of one atom, identified with  $\mathbb{C}^n$ .

**Construction.** Defined to be the finite index of the dimension of  $x$ ,  $\rightarrow$ ,  $\mathbb{C}$ .

**Lean 4 source** [QLambda/Domain/QuantumSet.lean](#)

```
abbrev Hilbert (X : QuantumSet) (x : X.Atom) : Type :=
  Fin (X.dim x) -> ?
```

#### 4.4.1750 Operators from the atom $x$ of $X$ to the atom $y$ of $Y$

**Definition.** Operators from the atom  $x$  of  $X$  to the atom  $y$  of  $Y$ .

**Construction.** Defined to be the Kraus operator of the dimension of  $x$  and the dimension of  $y$ .

**Lean 4 source** [QLambda/Domain/QuantumSet.lean](#)

```
abbrev Op (X Y : QuantumSet) (x : X.Atom) (y : Y.Atom) : Type :=
  KrausOperator (X.dim x) (Y.dim y)
```

#### 4.4.1751 The empty quantum set

**Definition.** The empty quantum set.

**Construction.** Constructed by supplying each component: atom and dimension. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/QuantumSet.lean](#)

```
def empty : QuantumSet where
  Atom := Empty
  dim := Empty.elim
```



#### 4.4.1752 The monoidal unit: a single one-dimensional atom

**Definition.** The monoidal unit: a single one-dimensional atom.

**Construction.** Constructed by supplying each component: atom and dimension. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/QuantumSet.lean](#)

```
def unit : QuantumSet where
  Atom := PUnit
  dim := fun _ => 1
```

#### 4.4.1753 An atomic quantum set whose only atom is n-dimensional

**Definition.** An atomic quantum set whose only atom is n-dimensional.

**Construction.** Constructed by supplying each component: atom and dimension. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/QuantumSet.lean](#)

```
def atomic (n : Nat) : QuantumSet where
  Atom := PUnit
  dim := fun _ => n
```

#### 4.4.1754 The qubit: one two-dimensional atom

**Definition.** The qubit: one two-dimensional atom.

**Construction.** Defined to be the atomic quantum set at 2.

**Lean 4 source** [QLambda/Domain/QuantumSet.lean](#)

```
def qubit : QuantumSet :=
  atomic 2
```

#### 4.4.1755 Lift an ordinary set to a classical quantum set of one-dimensional atoms

**Definition.** Lift an ordinary set to a classical quantum set of one-dimensional atoms.

**Construction.** Constructed by supplying each component: atom and dimension. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/QuantumSet.lean](#)

```
def liftSet (a : Type) : QuantumSet where
  Atom := a
  dim := fun _ => 1
```

#### 4.4.1756 The classical bit

**Definition.** The classical bit.

**Construction.** Defined to be the quantum set of a classical set of `Bool`.

**Lean 4 source** [QLambda/Domain/QuantumSet.lean](#)

```
def bit : QuantumSet :=  
  liftSet Bool
```

#### 4.4.1757 Tensor product of quantum sets: atoms are pairs of Hilbert spaces

**Definition.** Tensor product of quantum sets: atoms are pairs of Hilbert spaces.

**Construction.** Constructed by supplying each component: atom and dimension. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/QuantumSet.lean](#)

```
def tensor (X Y : QuantumSet) : QuantumSet where  
  Atom := X.Atom x Y.Atom  
  dim := fun p => X.dim p.1 * Y.dim p.2
```

#### 4.4.1758 Coproduct / disjoint union of quantum sets

**Definition.** Coproduct / disjoint union of quantum sets.

**Construction.** Constructed by supplying each component: atom and dimension. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/QuantumSet.lean](#)

```
def sum (X Y : QuantumSet) : QuantumSet where  
  Atom := X.Atom ? Y.Atom  
  dim := fun  
    | .inl x => X.dim x  
    | .inr y => Y.dim y
```

#### 4.4.1759 Dual quantum set

**Definition.** Dual quantum set. Dimensions are unchanged; duality lives in the operator spaces of relations.

**Construction.** Constructed by supplying each component: atom and dimension. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Domain/QuantumSet.lean](#)

```
def dual (X : QuantumSet) : QuantumSet where  
  Atom := X.Atom  
  dim := X.dim
```

#### 4.4.1760 Dimension of the unit for quantum sets

**Statement.** The dimension of  $x$  equals 1. Formally:  $\text{unit.dim } x = 1$ .

**Proof.** By definition: the left-hand side, the dimension of  $x$ , and the right-hand side, 1, unfold to the same term.

**Lean 4 source** `QLambda/Domain/QuantumSet.lean`

```
@[simp] theorem dim_unit (x : unit.Atom) : unit.dim x = 1 :=  
  rfl
```

#### 4.4.1761 Dimension of the qubit for quantum sets

**Statement.** The dimension of  $x$  equals 2. Formally:  $\text{qubit.dim } x = 2$ .

**Proof.** By definition: the left-hand side, the dimension of  $x$ , and the right-hand side, 2, unfold to the same term.

**Lean 4 source** `QLambda/Domain/QuantumSet.lean`

```
@[simp] theorem dim_qubit (x : qubit.Atom) : qubit.dim x = 2 :=  
  rfl
```

#### 4.4.1762 Dimension of the bit for quantum sets

**Statement.** The dimension of  $x$  equals 1. Formally:  $\text{bit.dim } x = 1$ .

**Proof.** By definition: the left-hand side, the dimension of  $x$ , and the right-hand side, 1, unfold to the same term.

**Lean 4 source** `QLambda/Domain/QuantumSet.lean`

```
@[simp] theorem dim_bit (x : bit.Atom) : bit.dim x = 1 :=  
  rfl
```

#### 4.4.1763 Dimension of the quantum set of a classical set

**Statement.**  $(\text{liftSet } \alpha).\text{dim } a = 1$ . Formally:  $(\text{liftSet } \alpha).\text{dim } a = 1$ .

**Proof.** By definition: the left-hand side,  $(\text{liftSet } \alpha).\text{dim } a$ , and the right-hand side, 1, unfold to the same term.

**Lean 4 source** `QLambda/Domain/QuantumSet.lean`

```
@[simp] theorem dim_liftSet {a} (a : a) : (liftSet a).dim a = 1 :=  
  rfl
```

#### 4.4.1764 Dimension of the atomic quantum set

**Statement.** For a natural number  $n$ :  $(\text{atomic } n).\text{dim } x = n$ . Formally:  $(\text{atomic } n).\text{dim } x = n$ .

**Proof.** By definition: the left-hand side,  $(\text{atomic } n).\text{dim } x$ , and the right-hand side,  $n$ , unfold to the same term.

##### Lean 4 source `QLambda/Domain/QuantumSet.lean`

```
@[simp] theorem dim_atomic (n : Nat) (x : (atomic n).Atom) :  
  (atomic n).dim x = n :=  
  rfl
```

#### 4.4.1765 A fold/unfold solution of a locally continuous recursive-object equation

**Definition.** A fold/unfold solution of a locally continuous recursive-object equation. Concrete models construct this record from a projection chain; clients consume the proved isomorphism rather than an axiom.

**Construction.** An element consists of `carrier`, `fold` and `unfold`, subject to the laws `fold_unfold` and `unfold_fold`.

##### Lean 4 source `QLambda/Domain/RecursiveObject.lean`

```
structure RecursiveObject (C : OmegaCategory) (F : C.Functor C) where  
  carrier : C.Obj  
  fold : C.Hom (F.obj carrier) carrier  
  unfold : C.Hom carrier (F.obj carrier)  
  fold_unfold : C.comp fold unfold = C.id  
  unfold_fold : C.comp unfold fold = C.id
```

#### 4.4.1766 A probe function from the atomic quantum set $H_d$

**Definition.** A probe function from the atomic quantum set  $H_d$ .

**Construction.** Defined to be the quantum function of the discrete of `.atomic d` and  $P$ .

##### Lean 4 source `QLambda/Domain/ScottFunction.lean`

```
abbrev ProbeFunction (P : QuantumPoset) (d : Nat) :=  
  QuantumFunction (QuantumPoset.discrete (.atomic d)) P
```

#### 4.4.1767 Internal convergence of an increasing probe chain

**Definition.** Internal convergence of an increasing probe chain.

**Construction.** Defined to be  $P.\text{order}.\text{comp } \text{Kinf}.\text{rel} = \bigcap n, P.\text{order}.\text{comp } (K n).\text{rel}$ .

##### Lean 4 source `QLambda/Domain/ScottFunction.lean`

```
def ProbeTends (P : QuantumPoset) {d : Nat}  
  (K : Nat -> ProbeFunction P d) (Kinf : ProbeFunction P d) : Prop :=  
  P.order.comp Kinf.rel = ? n, P.order.comp (K n).rel
```

#### 4.4.1768 Scott-continuous quantum function, Definition 3.2.4 of *Categories of quantum cpos*

**Definition.** Scott-continuous quantum function, Definition 3.2.4 of *Categories of quantum cpos*.

**Construction.** An element consists of continuous.

#### Lean 4 source `QLambda/Domain/ScottFunction.lean`

```
structure ScottFunction (P Q : QuantumCPO) extends
  QuantumFunction P.poset Q.poset where
  continuous :
    forall (d : Nat) (K : Nat -> ProbeFunction P.poset d)
      (Kinf : ProbeFunction P.poset d),
      Monotone K ->
      ProbeTends P.poset K Kinf ->
      ProbeTends Q.poset
        (fun n => QuantumFunction.comp toQuantumFunction (K n))
        (QuantumFunction.comp toQuantumFunction Kinf)
```

#### 4.4.1769 Extensionality for Scott-continuous functions

**Statement.** If  $F.toQuantumFunction = G.toQuantumFunction$ , then  $F = G$ .

**Proof.** By case analysis on  $F$ .

#### Lean 4 source `QLambda/Domain/ScottFunction.lean`

```
theorem ext {P Q : QuantumCPO} {F G : ScottFunction P Q}
  (h : F.toQuantumFunction = G.toQuantumFunction) : F = G := by
  cases F
  cases G
  congr
```

#### 4.4.1770 Identity is Scott continuous

**Definition.** Identity is Scott continuous.

**Construction.** Constructed by supplying each component: passage to quantum function and continuous. The accompanying laws are verified from the definitions.

#### Lean 4 source `QLambda/Domain/ScottFunction.lean`

```
def id (P : QuantumCPO) : ScottFunction P P where
  toQuantumFunction := QuantumFunction.idFun P.poset
  continuous := by
    intro d K Kinf hK hlim
    change
      P.poset.order.comp
        ((QuantumRel.id P.poset.carrier).comp Kinf.rel) =
        ? n, P.poset.order.comp
          ((QuantumRel.id P.poset.carrier).comp (K n).rel)
    change
      P.poset.order.comp Kinf.rel =
        ? n, P.poset.order.comp (K n).rel at hlim
    simp only [QuantumRel.id_comp] using hlim
```

#### 4.4.1771 Scott-continuous quantum functions compose

**Definition.** Scott-continuous quantum functions compose.

**Construction.** Constructed by supplying each component: passage to quantum function and continuous. The accompanying laws are verified from the definitions.

#### Lean 4 source `QLambda/Domain/ScottFunction.lean`

```
def comp {P Q R : QuantumCPO}
  (G : ScottFunction Q R) (F : ScottFunction P Q) :
  ScottFunction P R where
toQuantumFunction :=
  QuantumFunction.comp G.toQuantumFunction F.toQuantumFunction
continuous := by
  intro d K Kinf hK hlim
  have hFK : Monotone
    (fun n => QuantumFunction.comp F.toQuantumFunction (K n)) := by
    intro n m hnm
    change
      (QuantumFunction.comp F.toQuantumFunction (K n)) <=
        QuantumFunction.comp F.toQuantumFunction (K m)
  have hrel :
    (K m).rel <= P.poset.order.comp (K n).rel :=
    hK hnm
  calc
    (QuantumFunction.comp F.toQuantumFunction (K m)).rel
      = F.rel.comp (K m).rel := rfl
  _ <= F.rel.comp (P.poset.order.comp (K n).rel) :=
    QuantumRel.comp_mono_right hrel
  _ = (F.rel.comp P.poset.order).comp (K n).rel :=
    (QuantumRel.assoc _ _ _).symm
  _ <= (Q.poset.order.comp F.rel).comp (K n).rel :=
    QuantumRel.comp_mono_left _ F.monotone
  _ = Q.poset.order.comp
    (QuantumFunction.comp F.toQuantumFunction (K n)).rel :=
    QuantumRel.assoc _ _ _
  simpa only [QuantumFunction.comp, QuantumRel.assoc] using
    (G.continuous d
      (fun n => QuantumFunction.comp F.toQuantumFunction (K n))
      (QuantumFunction.comp F.toQuantumFunction Kinf)
      hFK (F.continuous d K Kinf hK hlim))
```

#### 4.4.1772 The identity is a left unit for composition for Scott-continuous functions

**Statement.** The composite of the identity of  $Q$  after  $F$  equals  $F$ . Formally:  $\text{comp } (\text{id } Q) F = F$ .

**Proof.** Both sides are compared pointwise (by extensionality). It follows from the extensionality for Scott-continuous functions, the extensionality for quantum functions and the fact that the identity is a left unit for composition for quantum relations.

#### Lean 4 source `QLambda/Domain/ScottFunction.lean`

```
@[simp] theorem id_comp {P Q : QuantumCPO} (F : ScottFunction P Q) :
  comp (id Q) F = F := by
  apply ext
```

```

apply QuantumFunction.ext
exact QuantumRel.id_comp F.rel

```

#### 4.4.1773 The identity is a right unit for composition for Scott-continuous functions

**Statement.** The composite of  $F$  after the identity of  $P$  equals  $F$ . Formally:  $\text{comp } F \text{ (id } P) = F$ .

**Proof.** Both sides are compared pointwise (by extensionality). It follows from the extensionality for Scott-continuous functions, the extensionality for quantum functions and the composition of an identity.

##### Lean 4 source `QLambda/Domain/ScottFunction.lean`

```

@[simp] theorem comp_id {P Q : QuantumCPO} (F : ScottFunction P Q) :
  comp F (id P) = F := by
  apply ext
  apply QuantumFunction.ext
  exact QuantumRel.comp_id F.rel

```

#### 4.4.1774 Associativity of composition for Scott-continuous functions

**Statement.** The composite of the composite of  $H$  after  $G$  after  $F$  equals the composite of  $H$  after the composite of  $G$  after  $F$ .

**Proof.** Both sides are compared pointwise (by extensionality). It follows from the extensionality for Scott-continuous functions, the extensionality for quantum functions and the associativity of composition for quantum relations.

##### Lean 4 source `QLambda/Domain/ScottFunction.lean`

```

theorem assoc {P Q R S : QuantumCPO}
  (H : ScottFunction R S) (G : ScottFunction Q R)
  (F : ScottFunction P Q) :
  comp (comp H G) F = comp H (comp G F) := by
  apply ext
  apply QuantumFunction.ext
  exact QuantumRel.assoc H.rel G.rel F.rel

```

#### 4.4.1775 Proposition 3.2.3 on one atomic summand of an arbitrary domain

**Statement.** Proposition 3.2.3 on one atomic summand of an arbitrary domain.

**Proof.** The claim follows from a chain of equalities (or inequalities). Each component of the claim is established separately. The hypotheses are unpacked into their constituent data. The key step rewrites with the composition of an identity.

##### Lean 4 source `QLambda/Domain/ScottFunction.lean`

```

theorem restrictedChain_hasLimit
  (K : Nat -> QuantumFunction P Q.poset) (hK : Monotone K)
  (x : P.carrier.Atom) :
  exists Kinf : ProbeFunction Q.poset (P.carrier.dim x),
    ProbeTends Q.poset
    (fun n => QuantumFunction.restrictAtom (K n) x) Kinf := by

```

```

have hinc :
  forall n,
    (QuantumFunction.restrictAtom (K (n + 1)) x).rel <=
      Q.poset.order.comp
        (QuantumFunction.restrictAtom (K n) x).rel := by
intro n
have h :=
  QuantumFunction.restrictAtom_mono
    (hK (Nat.le_succ n)) x
exact h
obtain <R, hRfun, hRlim> :=
  Q.complete (P.carrier.dim x)
    (fun n => (QuantumFunction.restrictAtom (K n) x).rel)
    (fun n => (QuantumFunction.restrictAtom (K n) x).isFunction)
  hinc
let Kinf : ProbeFunction Q.poset (P.carrier.dim x) :=
{ rel := R
  isFunction := hRfun
  monotone := by
    change R.comp
      (QuantumRel.id (.atomic (P.carrier.dim x))) <=
        Q.poset.order.comp R
    rw [QuantumRel.comp_id]
    calc
      R = (QuantumRel.id Q.poset.carrier).comp R :=
        (QuantumRel.id_comp _).symm
      _ <= Q.poset.order.comp R :=
        QuantumRel.comp_mono_left _ Q.poset.reflexive }
exact <Kinf, hRlim>

```

#### 4.4.1776 Definition of the atom limit

**Definition.** The atomic limit selected from qCPO completeness.

**Construction.** Defined to be the choose of the restricted chain has limit of  $K$ ,  $hK$ ,  $x$ .

#### Lean 4 source `QLambda/Domain/ScottFunction.lean`

```

noncomputable def atomLimit
  (K : Nat -> QuantumFunction P Q.poset) (hK : Monotone K)
  (x : P.carrier.Atom) :
  ProbeFunction Q.poset (P.carrier.dim x) :=
  Classical.choose (restrictedChain_hasLimit K hK x)

```

#### 4.4.1777 Atom limit of the convergence

**Statement.** If  $K$  is monotone, then `ProbeTends Q.poset (fun n => QuantumFunction.restrictAtom (K n) x) (atomLimit K hK x)`.

**Proof.** The proof term combines the facts named in it directly.

#### Lean 4 source `QLambda/Domain/ScottFunction.lean`

```

theorem atomLimit_tends
  (K : Nat -> QuantumFunction P Q.poset) (hK : Monotone K)

```



```

(x : P.carrier.Atom) :
ProbeTends Q.poset
  (fun n => QuantumFunction.restrictAtom (K n) x)
  (atomLimit K hK x) :=
Classical.choose_spec (restrictedChain_hasLimit K hK x)

```

#### 4.4.1778 Reassembly of the atomic limits from Proposition 3.2.3

**Definition.** Reassembly of the atomic limits from Proposition 3.2.3.

**Construction.** Defined to be the assembly from atoms of  $\text{fun } x \Rightarrow (\text{atomLimit } K \text{ hK } x) \text{.rel}$ .

**Lean 4 source** [QLambda/Domain/ScottFunction.lean](#)

```

noncomputable def limitRel
  (K : Nat -> QuantumFunction P Q.poset) (hK : Monotone K) :
  QuantumRel P.carrier Q.poset.carrier :=
  QuantumRel.assembleAtoms (fun x => (atomLimit K hK x).rel)

```

#### 4.4.1779 Limit rel of the functionality

**Statement.** If  $K$  is monotone, then  $\text{limitRel } K \text{ hK}$  is functional. Formally:  $(\text{limitRel } K \text{ hK}).\text{IsFunction}$ .

**Proof.** This is an instance of the assembly from atoms of the functionality for quantum relations.

**Lean 4 source** [QLambda/Domain/ScottFunction.lean](#)

```

theorem limitRel_isFunction
  (K : Nat -> QuantumFunction P Q.poset) (hK : Monotone K) :
  (limitRel K hK).IsFunction :=
  QuantumRel.assembleAtoms_isFunction
  (fun x => (atomLimit K hK x).rel)
  (fun x => (atomLimit K hK x).isFunction)

```

#### 4.4.1780 The reassembled relation is the internal pointwise limit on the whole, possibly non-atomic, quantum-set domain

**Statement.** The reassembled relation is the internal pointwise limit on the whole, possibly non-atomic, quantum-set domain. Formally:  $Q.\text{poset.order.comp } (\text{limitRel } K \text{ hK}) = \bigcap n, Q.\text{poset.order.comp } (K \text{ n}).\text{rel}$ .

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the restriction to an atom of a composite for quantum relations, the restriction to an atom of the indexed infimum for quantum relations, the extensionality for quantum relations and congruence of function application.

**Lean 4 source** [QLambda/Domain/ScottFunction.lean](#)

```

theorem limitRel_tends
  (K : Nat -> QuantumFunction P Q.poset) (hK : Monotone K) :
  Q.poset.order.comp (limitRel K hK) =

```

```

    ? n, Q.poset.order.comp (K n).rel := by
  apply QuantumRel.ext
  intro x y
  have hx := atomLimit_tends K hK x
  have hre :
    QuantumRel.restrictAtom
      (Q.poset.order.comp (limitRel K hK)) x =
    QuantumRel.restrictAtom
      (? n, Q.poset.order.comp (K n).rel) x := by
  rw [QuantumRel.restrictAtom_comp]
  change
    Q.poset.order.comp (atomLimit K hK x).rel =
    QuantumRel.restrictAtom
      (? n, Q.poset.order.comp (K n).rel) x
  rw [QuantumRel.restrictAtom_iInf]
  simp only [QuantumRel.restrictAtom_comp]
  exact hx
exact congrArg
  (fun R => R.component
    (default : (QuantumSet.atomic (P.carrier.dim x)).Atom) y) hre

```

#### 4.4.1781 Proposition 3.3.1: an internal limit of monotone maps remains monotone

**Statement.** Proposition 3.3.1: an internal limit of monotone maps remains monotone. Formally:  $(\text{limitRel } K \text{ hK}).\text{comp } P.\text{order} \leq Q.\text{poset.order.comp } (\text{limitRel } K \text{ hK}).$

**Proof.** The claim follows from a chain of equalities (or inequalities). The key step rewrites with the fact that a quantum order is idempotent under relational composition and the monotonicity of the composition, in the left argument.

#### Lean 4 source `QLambda/Domain/ScottFunction.lean`

```

theorem limitRel_monotone
  (K : Nat -> QuantumFunction P Q.poset) (hK : Monotone K) :
  (limitRel K hK).comp P.order <=
    Q.poset.order.comp (limitRel K hK) := by
  have hlim := limitRel_tends K hK
  calc
    (limitRel K hK).comp P.order <=
      Q.poset.order.comp ((limitRel K hK).comp P.order) := by
    calc
      (limitRel K hK).comp P.order =
        (QuantumRel.id Q.poset.carrier).comp
          ((limitRel K hK).comp P.order) :=
          (QuantumRel.id_comp _).symm
      _ <= Q.poset.order.comp ((limitRel K hK).comp P.order) :=
        QuantumRel.comp_mono_left _ Q.poset.reflexive
      _ = (Q.poset.order.comp (limitRel K hK)).comp P.order :=
        (QuantumRel.assoc _ _ _).symm
      _ = (? n, Q.poset.order.comp (K n).rel).comp P.order :=
        congrArg (fun R => R.comp P.order) hlim
      _ <= ? n, (Q.poset.order.comp (K n).rel).comp P.order := by
        apply le_iInf
        intro n
        exact QuantumRel.comp_mono_left P.order

```

```

      (iInf_le (fun n => Q.poset.order.comp (K n).rel) n)
_ <= ? n, Q.poset.order.comp (K n).rel := by
  apply le_iInf
  intro n
  refine (iInf_le
    (fun n => (Q.poset.order.comp (K n).rel).comp P.order) n).trans ?_
  calc
    (Q.poset.order.comp (K n).rel).comp P.order =
      Q.poset.order.comp ((K n).rel.comp P.order) :=
        QuantumRel.assoc _ _ _
  _ <= Q.poset.order.comp
    (Q.poset.order.comp (K n).rel) :=
      QuantumRel.comp_mono_right (K n).monotone
  _ = (Q.poset.order.comp Q.poset.order).comp (K n).rel :=
    (QuantumRel.assoc _ _ _).symm
  _ = Q.poset.order.comp (K n).rel := by
    rw [QuantumPoset.order_comp_self]
  _ = Q.poset.order.comp (limitRel K hK) := hlim.symm

```

#### 4.4.1782 The arbitrary-domain limit as a monotone quantum function

**Definition.** The arbitrary-domain limit as a monotone quantum function.

**Construction.** Constructed by supplying each component: rel, functionality and monotonicity. The accompanying laws are verified from the definitions.

**Lean 4 source** `QLambda/Domain/ScottFunction.lean`

```

noncomputable def functionLimit
  (K : Nat -> QuantumFunction P Q.poset) (hK : Monotone K) :
  QuantumFunction P Q.poset where
  rel := limitRel K hK
  isFunction := limitRel_isFunction K hK
  monotone := limitRel_monotone K hK

```

#### 4.4.1783 Function limit of the convergence

**Statement.** If  $K$  is monotone, then the composition of  $(\text{functionLimit } K \text{ hK}).\text{rel}$  equals  $\bigcap n, Q.\text{poset.order.comp } (K \text{ n}).\text{rel}$ .

**Proof.** This is an instance of the fact that the reassembled relation is the internal pointwise limit on the whole, possibly non-atomic, quantum-set domain, applied to the hypothesis that  $K$  is monotone.

**Lean 4 source** `QLambda/Domain/ScottFunction.lean`

```

theorem functionLimit_tends
  (K : Nat -> QuantumFunction P Q.poset) (hK : Monotone K) :
  Q.poset.order.comp (functionLimit K hK).rel =
    ? n, Q.poset.order.comp (K n).rel :=
  limitRel_tends K hK

```

#### 4.4.1784 Lemma 3.1.2: an internal limit is exactly the external hom supremum

**Statement.** Lemma 3.1.2: an internal limit is exactly the external hom supremum. Formally:  $\text{IsLUB } (\text{Set.range } K) \text{ Kinf.}$

**Proof.** The claim follows from a chain of equalities (or inequalities). Each component of the claim is established separately. The key step rewrites with the hypothesis that  $Q.\text{poset.order.comp } K\text{inf.}$   
 $\text{rel} = \bigcap n, Q.\text{poset.order.comp } (K \ n).\text{rel}.$

#### Lean 4 source `QLambda/Domain/ScottFunction.lean`

```
theorem tends_isLUB
  (K : Nat -> QuantumFunction P Q.poset)
  (Kinf : QuantumFunction P Q.poset)
  (hlim :
    Q.poset.order.comp Kinf.rel =
      ? n, Q.poset.order.comp (K n).rel) :
  IsLUB (Set.range K) Kinf := by
  constructor
  * rintro F <n, rfl>
  change Kinf.rel <= Q.poset.order.comp (K n).rel
  calc
    Kinf.rel =
      (QuantumRel.id Q.poset.carrier).comp Kinf.rel :=
      (QuantumRel.id_comp _).symm
    _ <= Q.poset.order.comp Kinf.rel :=
      QuantumRel.comp_mono_left _ Q.poset.reflexive
    _ = ? m, Q.poset.order.comp (K m).rel := hlim
    _ <= Q.poset.order.comp (K n).rel :=
      iInf_le _ n
  * intro G hG
  change G.rel <= Q.poset.order.comp Kinf.rel
  rw [hlim]
  apply le_iInf
  intro n
  exact hG <n, rfl>
```

#### 4.4.1785 Function limit of the least-upper-bound property

**Statement.** If  $K$  is monotone, then  $\text{functionLimit } K \ hK$  is a least upper bound of  $\text{Set.range } K$ .

**Proof.** This is an instance of the fact that lemma 3.1.2: an internal limit is exactly the external hom supremum.

#### Lean 4 source `QLambda/Domain/ScottFunction.lean`

```
theorem functionLimit_isLUB
  (K : Nat -> QuantumFunction P Q.poset) (hK : Monotone K) :
  IsLUB (Set.range K) (functionLimit K hK) :=
  tends_isLUB K (functionLimit K hK) (functionLimit_tends K hK)
```

#### 4.4.1786 Composition is monotone in its left argument

**Statement.** Composition is monotone in its left argument. Formally:  $\text{Monotone fun } G.$

**Proof.** The claim follows from a chain of equalities (or inequalities).

**Lean 4 source** [QLambda/Domain/ScottFunctionInstances.lean](#)

```
theorem comp_mono_left {P Q R : QuantumCPO}
  (F : ScottFunction P Q) :
  Monotone (fun G : ScottFunction Q R => comp G F) := by
  intro G H hGH
  change H.rel.comp F.rel <=
    R.poset.order.comp (G.rel.comp F.rel)
  calc
    H.rel.comp F.rel <=
      (R.poset.order.comp G.rel).comp F.rel :=
      QuantumRel.comp_mono_left F.rel hGH
    _ = R.poset.order.comp (G.rel.comp F.rel) :=
      QuantumRel.assoc _ _ _
```

#### 4.4.1787 Composition is monotone in its right argument

**Statement.** Composition is monotone in its right argument. Formally: `Monotone fun F.`

**Proof.** The claim follows from a chain of equalities (or inequalities).

**Lean 4 source** [QLambda/Domain/ScottFunctionInstances.lean](#)

```
theorem comp_mono_right {P Q R : QuantumCPO}
  (G : ScottFunction Q R) :
  Monotone (fun F : ScottFunction P Q => comp G F) := by
  intro F H hFH
  change G.rel.comp H.rel <=
    R.poset.order.comp (G.rel.comp F.rel)
  calc
    G.rel.comp H.rel <=
      G.rel.comp (Q.poset.order.comp F.rel) :=
      QuantumRel.comp_mono_right hFH
    _ = (G.rel.comp Q.poset.order).comp F.rel :=
      (QuantumRel.assoc _ _ _).symm
    _ <= (R.poset.order.comp G.rel).comp F.rel :=
      QuantumRel.comp_mono_left F.rel G.monotone
    _ = R.poset.order.comp (G.rel.comp F.rel) :=
      QuantumRel.assoc _ _ _
```

#### 4.4.1788 Restrict of the convergence for Scott-continuous functions

**Statement.** If  $Q.\text{poset.order.comp } K.\text{inf.rel} = \bigcap n, Q.\text{poset.order.comp } (K\ n).\text{rel}$ , then the displayed property holds.

**Proof.** The key step rewrites with the restriction to an atom of a composite for quantum relations, the hypothesis that  $Q.\text{poset.order.comp } K.\text{inf.rel} = \bigcap n, Q.\text{poset.order.comp } (K\ n).\text{rel}$  and the restriction to an atom of the indexed infimum for quantum relations.

**Lean 4 source** [QLambda/Domain/ScottFunctionInstances.lean](#)

```

theorem restrict_tends {P : QuantumPoset} {Q : QuantumCPO}
  (K : Nat -> QuantumFunction P Q.poset) (Kinf : QuantumFunction P Q.poset)
  (hlim :
    Q.poset.order.comp Kinf.rel =
      ? n, Q.poset.order.comp (K n).rel)
  (x : P.carrier.Atom) :
  ProbeTends Q.poset
    (fun n => QuantumFunction.restrictAtom (K n) x)
    (QuantumFunction.restrictAtom Kinf x) := by
change
  Q.poset.order.comp (QuantumRel.restrictAtom Kinf.rel x) =
    ? n, Q.poset.order.comp
      (QuantumRel.restrictAtom (K n).rel x)
rw [ <- QuantumRel.restrictAtom_comp, hlim,
     QuantumRel.restrictAtom_iInf]
simp only [QuantumRel.restrictAtom_comp]

```

#### 4.4.1789 Lemma 3.3.3: postcomposition of an internal limit by a fixed function preserves the limit

**Statement.** Lemma 3.3.3: postcomposition of an internal limit by a fixed function preserves the limit. Formally:  $R.\text{poset.order.comp } (Kinf.rel.comp F.rel) = \bigcap n, R.\text{poset.order.comp } ((K n).rel.comp F.rel)$ .

**Proof.** The claim follows from a chain of equalities (or inequalities). The goal is simplified using the associativity of composition for quantum relations.

#### Lean 4 source `QLambda/Domain/ScottFunctionInstances.lean`

```

theorem comp_tends_right {P Q : QuantumPoset} {R : QuantumCPO}
  (K : Nat -> QuantumFunction Q R.poset)
  (Kinf : QuantumFunction Q R.poset)
  (hlim :
    R.poset.order.comp Kinf.rel =
      ? n, R.poset.order.comp (K n).rel)
  (F : QuantumFunction P Q) :
  R.poset.order.comp (Kinf.rel.comp F.rel) =
    ? n, R.poset.order.comp ((K n).rel.comp F.rel) := by
calc
  R.poset.order.comp (Kinf.rel.comp F.rel) =
    (R.poset.order.comp Kinf.rel).comp F.rel :=
    (QuantumRel.assoc _ _ _).symm
_ = (? n, R.poset.order.comp (K n).rel).comp F.rel :=
  congrArg (fun S => S.comp F.rel) hlim
_ = ? n, (R.poset.order.comp (K n).rel).comp F.rel :=
  QuantumRel.iInf_comp_of_function
    (fun n => R.poset.order.comp (K n).rel)
    F.rel F.isFunction
_ = ? n, R.poset.order.comp ((K n).rel.comp F.rel) := by
  simp only [QuantumRel.assoc]

```

#### 4.4.1790 Lemma 3.3.4: precomposition of an arbitrary-domain internal limit by a Scott function preserves the limit

**Statement.** Lemma 3.3.4: precomposition of an arbitrary-domain internal limit by a Scott function preserves the limit. Formally:  $R.\text{poset.order.comp } (G.\text{rel.comp } K.\text{inf.rel}) = \bigcap n, R.\text{poset.order.comp } (G.\text{rel.comp } (K n).\text{rel})$ .

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the restriction to an atom of the indexed infimum for quantum relations, the restriction to an atom of a composite for quantum relations, the extensionality for quantum relations and the monotonicity of the restriction to an atom.

#### Lean 4 source `QLambda/Domain/ScottFunctionInstances.lean`

```
theorem comp_tends_left {P : QuantumPoset} {Q R : QuantumCPO}
  (G : ScottFunction Q R)
  (K : Nat -> QuantumFunction P Q.poset) (hK : Monotone K)
  (Kinf : QuantumFunction P Q.poset)
  (hlim :
    Q.poset.order.comp Kinf.rel =
      ? n, Q.poset.order.comp (K n).rel) :
  R.poset.order.comp (G.rel.comp Kinf.rel) =
    ? n, R.poset.order.comp (G.rel.comp (K n).rel) := by
  apply QuantumRel.ext
  intro x z
  have hKr :
    Monotone (fun n => QuantumFunction.restrictAtom (K n) x) := by
    intro n m hnm
    exact QuantumFunction.restrictAtom_mono (hK hnm) x
  have hx := G.continuous (P.carrier.dim x)
  (fun n => QuantumFunction.restrictAtom (K n) x)
  (QuantumFunction.restrictAtom Kinf x)
  hKr (restrict_tends K Kinf hlim x)
  have hre :
    QuantumRel.restrictAtom
      (R.poset.order.comp (G.rel.comp Kinf.rel)) x =
      QuantumRel.restrictAtom
        (? n, R.poset.order.comp (G.rel.comp (K n).rel)) x := by
  rw [QuantumRel.restrictAtom_iInf]
  simp only [QuantumRel.restrictAtom_comp]
  exact hx
  exact congrArg
    (fun S => S.component
      (default : (QuantumSet.atomic (P.carrier.dim x)).Atom) z) hre
```

#### 4.4.1791 Every function whose domain has the discrete order is Scott continuous: probe chains into the domain are constant

**Definition.** Every function whose domain has the discrete order is Scott continuous: probe chains into the domain are constant.

**Construction.** Constructed by supplying each component: passage to quantum function and continuous. The accompanying laws are verified from the definitions.

### Lean 4 source `QLambda/Domain/ScottFunctionInstances.lean`

```
def ofDiscreteDomain {X : QuantumSet} [DecidableEq X.Atom]
  {Q : QuantumCPO}
  (F : QuantumFunction (QuantumPoset.discrete X) Q.poset) :
  ScottFunction (QuantumCPO.discrete X) Q where
toQuantumFunction := F
continuous := by
  intro d K Kinf hK hlim
  have hconst : forall n, K n = K 0 := by
    intro n
    induction n with
    | zero => rfl
    | succ n ih =>
      have hle : (K (n + 1)).rel <= (K n).rel := by
        have h := hK (Nat.le_succ n)
        change (K (n + 1)).rel <=
          (QuantumPoset.discrete X).order.comp (K n).rel at h
        change (K (n + 1)).rel <=
          (QuantumRel.id
            (QuantumCPO.discrete X).poset.carrier).comp (K n).rel at h
        rw [QuantumRel.id_comp] at h
        exact h
      exact
        (QuantumFunction.ext
          (QuantumRel.function_eq_of_le
            (K (n + 1)).isFunction (K n).isFunction hle)).trans ih
  have hKinf : Kinf = K 0 := by
    apply QuantumFunction.ext
    have hlim' := hlim
    change
      (QuantumRel.id
        (QuantumCPO.discrete X).poset.carrier).comp Kinf.rel =
        ? n, (QuantumRel.id
          (QuantumCPO.discrete X).poset.carrier).comp (K n).rel at hlim'
    rw [QuantumRel.id_comp] at hlim'
    simp only [hconst, iInf_const] at hlim'
    rw [QuantumRel.id_comp] at hlim'
    exact hlim'
  subst Kinf
  simp only [ProbeTends, hconst, iInf_const]
```

#### 4.4.1792 The chosen hom supremum is characterized by internal convergence

**Statement.** The chosen hom supremum is characterized by internal convergence. Formally:  $Q.\text{poset}.\text{order.comp} (\text{OmegaComplete}.\omega\text{Sup } K \text{ hK}).\text{rel} = \bigcap n, Q.\text{poset}.\text{order.comp} (K n).\text{rel}$ .

**Proof.** This is an instance of the Scott limit of the convergence for Scott-continuous functions, applied to the hypothesis that  $K$  is monotone.

### Lean 4 source `QLambda/Domain/ScottFunctionInstances.lean`

```
theorem ?Sup_tends {P Q : QuantumCPO}
  (K : Nat -> ScottFunction P Q) (hK : Monotone K) :
```



```

Q.poset.order.comp (OmegaComplete.?Sup K hK).rel =
  ? n, Q.poset.order.comp (K n).rel :=
scottLimit_tends K hK

```

#### 4.4.1793 Convergence of the least-upper-bound property of the scott for Scott-continuous functions

**Statement.** If  $Q.poset.order.comp\ Kinf.rel = \bigcap n, Q.poset.order.comp\ (K\ n).rel$ , then  $Kinf$  is a least upper bound of  $Set.range\ K$ .

**Proof.** Each component of the claim is established separately.

#### Lean 4 source `QLambda/Domain/ScottFunctionInstances.lean`

```

theorem tends_isLUB_scott {P Q : QuantumCPO}
  (K : Nat -> ScottFunction P Q) (Kinf : ScottFunction P Q)
  (hlim :
    Q.poset.order.comp Kinf.rel =
      ? n, Q.poset.order.comp (K n).rel) :
  IsLUB (Set.range K) Kinf := by
  have hq := tends_isLUB
    (fun n => (K n).toQuantumFunction)
    Kinf.toQuantumFunction hlim
  constructor
  * rintro F <n, rfl>
    exact hq.1 <n, rfl>
  * intro F hF
    apply hq.2
    rintro _ <n, rfl>
    exact hF <n, rfl>

```

#### 4.4.1794 Composition preserves hom suprema in its left argument

**Statement.** Composition preserves hom suprema in its left argument. Formally:  $comp\ (OmegaComplete.\omega Sup\ K\ hK)\ F = OmegaComplete.\omega Sup\ (fun\ n\ =>\ comp\ (K\ n)\ F)\ ((comp\_mono\_left\ F).comp\ hK)$ .

**Proof.** It follows from the uniqueness of the supremum of an  $\omega$ -chain.

#### Lean 4 source `QLambda/Domain/ScottFunctionInstances.lean`

```

theorem comp_?Sup_left {P Q R : QuantumCPO}
  (K : Nat -> ScottFunction Q R) (hK : Monotone K)
  (F : ScottFunction P Q) :
  comp (OmegaComplete.?Sup K hK) F =
    OmegaComplete.?Sup (fun n => comp (K n) F)
      ((comp_mono_left F).comp hK) := by
  let c : Nat -> ScottFunction P R := fun n => comp (K n) F
  have hc : Monotone c := (comp_mono_left F).comp hK
  have hlim :
    R.poset.order.comp
      ((comp (OmegaComplete.?Sup K hK) F).rel) =
      ? n, R.poset.order.comp (c n).rel :=
  comp_tends_right
    (fun n => (K n).toQuantumFunction)

```

```

      (OmegaComplete.?Sup K hK).toQuantumFunction
      (?Sup_tends K hK) F.toQuantumFunction
have hlub :
  IsLUB (Set.range c) (comp (OmegaComplete.?Sup K hK) F) :=
  tends_isLUB_scott c (comp (OmegaComplete.?Sup K hK) F) hlim
exact (OmegaComplete.?Sup_unique c hc
  (fun n => hlub.1 <n, rfl>)
  (fun G hG => hlub.2 (by
    rintro _ <n, rfl>
    exact hG n))) .symm

```

#### 4.4.1795 Composition preserves hom suprema in its right argument

**Statement.** Composition preserves hom suprema in its right argument. Formally:  $\text{comp } G \text{ (OmegaComplete.}\omega\text{Sup } K \text{ hK)} = \text{OmegaComplete.}\omega\text{Sup (fun } n \Rightarrow \text{comp } G \text{ (K } n)) \text{ ((comp\_mono\_right } G) \text{ .comp hK)}$ .

**Proof.** It follows from the uniqueness of the supremum of an  $\omega$ -chain.

#### Lean 4 source `QLambda/Domain/ScottFunctionInstances.lean`

```

theorem comp_?Sup_right {P Q R : QuantumCPO}
  (G : ScottFunction Q R)
  (K : Nat -> ScottFunction P Q) (hK : Monotone K) :
  comp G (OmegaComplete.?Sup K hK) =
    OmegaComplete.?Sup (fun n => comp G (K n))
    ((comp_mono_right G).comp hK) := by
let c : Nat -> ScottFunction P R := fun n => comp G (K n)
have hc : Monotone c := (comp_mono_right G).comp hK
have hlim :
  R.poset.order.comp
    ((comp G (OmegaComplete.?Sup K hK)).rel) =
    ? n, R.poset.order.comp (c n).rel :=
comp_tends_left G
  (fun n => (K n).toQuantumFunction) hK
  (OmegaComplete.?Sup K hK).toQuantumFunction
  (?Sup_tends K hK)
have hlub :
  IsLUB (Set.range c) (comp G (OmegaComplete.?Sup K hK)) :=
  tends_isLUB_scott c (comp G (OmegaComplete.?Sup K hK)) hlim
exact (OmegaComplete.?Sup_unique c hc
  (fun n => hlub.1 <n, rfl>)
  (fun F hF => hlub.2 (by
    rintro _ <n, rfl>
    exact hF n))) .symm

```

#### 4.4.1796 An ordinary function equipped with the discrete equality order

**Definition.** An ordinary function equipped with the discrete equality order.

**Construction.** An element consists of `toFun`.

#### Lean 4 source `QLambda/Domain/SetHom.lean`

```
structure SetHom (A B : Type u) where
  toFun : A -> B
```

#### 4.4.1797 Extensionality for set maps

**Statement.** If for every  $x$ ,  $f\ x = g\ x$ , then  $f = g$ . Formally:  $f = g$ .

**Proof.** By case analysis on  $f$ . It follows from function extensionality.

**Lean 4 source** [QLambda/Domain/SetHomInstances.lean](#)

```
theorem ext {A B : Type u} {f g : SetHom A B}
  (h : forall x, f x = g x) : f = g := by
  cases f
  cases g
  congr
  exact funext h
```

#### 4.4.1798 Definition of the set map of the identity

**Definition.** The identity of  $A$  is a set map.

**Construction.** Constructed by supplying each component of the structure explicitly.

**Lean 4 source** [QLambda/Domain/SetHomInstances.lean](#)

```
def id (A : Type u) : SetHom A A :=
  <fun x => x>
```

#### 4.4.1799 Definition of the composition of set maps

**Definition.** The composition of  $g$  and  $f$  is a set map.

**Construction.** Constructed by supplying each component of the structure explicitly.

**Lean 4 source** [QLambda/Domain/SetHomInstances.lean](#)

```
def comp {A B C : Type u} (g : SetHom B C) (f : SetHom A B) :
  SetHom A C :=
  <fun x => g (f x)>
```

#### 4.4.1800 Symmetric monoidal closed structure on an enriched category

**Definition.** Symmetric monoidal closed structure on an enriched category.

**Construction.** An element consists of `unit`, `tensor`, `internalHom`, `tensorMap`, `tensorMap_mono_left`, `tensorMap_mono_right`, `tensorMap_comp` and `leftUnitor`, subject to the laws `tensorMap_id`.

**Lean 4 source** [QLambda/Domain/SymmetricMonoidalClosed.lean](#)

```

structure SymmetricMonoidalClosed (L : OmegaCategory.{u, v}) where
  unit : L.Obj
  tensor : L.Obj -> L.Obj -> L.Obj
  internalHom : L.Obj -> L.Obj -> L.Obj
  tensorMap :
    {A B C D : L.Obj} -> L.Hom A B -> L.Hom C D ->
      L.Hom (tensor A C) (tensor B D)
  tensorMap_mono_left :
    forall {A B C D : L.Obj} (g : L.Hom C D),
      Monotone (fun f : L.Hom A B => tensorMap f g)
  tensorMap_mono_right :
    forall {A B C D : L.Obj} (f : L.Hom A B),
      Monotone (fun g : L.Hom C D => tensorMap f g)
  tensorMap_id :
    forall {A B : L.Obj}, tensorMap (@L.id A) (@L.id B) = L.id
  tensorMap_comp :
    forall {A B C D E F : L.Obj}
      (f_2 : L.Hom B C) (f_1 : L.Hom A B)
      (g_2 : L.Hom E F) (g_1 : L.Hom D E),
      tensorMap (L.comp f_2 f_1) (L.comp g_2 g_1) =
        L.comp (tensorMap f_2 g_2) (tensorMap f_1 g_1)
  leftUnitor : forall A : L.Obj, L.Iso (tensor unit A) A
  rightUnitor : forall A : L.Obj, L.Iso (tensor A unit) A
  associator :
    forall A B C : L.Obj, L.Iso (tensor (tensor A B) C) (tensor A (tensor B C))
  braiding : forall A B : L.Obj, L.Iso (tensor A B) (tensor B A)
  eval :
    {A B : L.Obj} -> L.Hom (tensor (internalHom A B) A) B
  curry :
    {X A B : L.Obj} -> L.Hom (tensor X A) B ->
      L.Hom X (internalHom A B)
  uncurry :
    {X A B : L.Obj} -> L.Hom X (internalHom A B) ->
      L.Hom (tensor X A) B
  curry_uncurry :
    forall {X A B : L.Obj} (f : L.Hom X (internalHom A B)),
      curry (uncurry f) = f
  uncurry_curry :
    forall {X A B : L.Obj} (f : L.Hom (tensor X A) B),
      uncurry (curry f) = f
  curry_mono :
    forall {X A B : L.Obj}, Monotone (@curry X A B)
  curry_?Sup :
    forall {X A B : L.Obj} (c : Nat -> L.Hom (tensor X A) B) (hc : Monotone c),
      curry (OmegaComplete.?Sup c hc) =
        OmegaComplete.?Sup (fun n => curry (c n)) (curry_mono.comp hc)

```

#### 4.4.1801 Bottom element on quantum relations

**Definition.** Equip  $\text{QuantumRel } X \ Y$  with its canonical bottom element.

**Construction.** Given by  $\langle \text{bot} \rangle$ .

**Lean 4 source** [QLambda/Domain/instBotQuantumRel.lean](#)

```
instance instBotQuantumRel : Bot (QuantumRel X Y) := <bot>
```

#### 4.4.1802 Bounded order on quantum relations

**Definition.** Equip `QuantumRel X Y` with its canonical bounded order.

**Construction.** The operations are given by: order top element and bottom element order. Each required law follows from the corresponding property of the underlying data.

**Lean 4 source** `QLambda/Domain/instBoundedOrderQuantumRel.lean`

```
instance instBoundedOrderQuantumRel : BoundedOrder (QuantumRel X Y) where
  le_top := fun _ _ => le_top
  bot_le := fun _ _ => bot_le
```

#### 4.4.1803 Coercion to functions on $\omega$ -continuous maps

**Definition.** Equip `(OmegaMap D E)` `(fun _ => D → E)` with its canonical coercion to functions.

**Construction.** Given by `<OmegaMap.toFun>`.

**Lean 4 source** `QLambda/Domain/instCoeFunOmegaMap.lean`

```
instance instCoeFunOmegaMap : CoeFun (OmegaMap D E) (fun _ => D → E) :=
  <OmegaMap.toFun>
```

#### 4.4.1804 Coercion to functions on set maps

**Definition.** Equip `(SetHom A B)` `(fun _ => A → B)` with its canonical coercion to functions.

**Construction.** Given by `<SetHom.toFun>`.

**Lean 4 source** `QLambda/Domain/instCoeFunSetHom.lean`

```
instance instCoeFunSetHom {A B : Type u} : CoeFun (SetHom A B) (fun _ => A → B) :=
  <SetHom.toFun>
```

#### 4.4.1805 Coercion on Scott-continuous functions

**Definition.** Equip `(ScottFunction P Q)` `(QuantumFunction P.poset Q.poset)` with its canonical coercion.

**Construction.** Given by `<ScottFunction.toQuantumFunction>`.

**Lean 4 source** `QLambda/Domain/instCoeScottFunction.lean`

```
instance instCoeScottFunction {P Q : QuantumCPO} : Coe (ScottFunction P Q)
  (QuantumFunction P.poset Q.poset) :=
  <ScottFunction.toQuantumFunction>
```

#### 4.4.1806 Coercion to types on $\omega$ -complete objects

**Definition.** Equip `OmegaObject (Type u)` with its canonical coercion to types.

**Construction.** Given by `<OmegaObject.Carrier>`.

**Lean 4 source** `QLambda/Domain/instCoeSortOmegaObject.lean`

```
instance instCoeSortOmegaObject : CoeSort OmegaObject (Type u) :=
  <OmegaObject.Carrier>
```

#### 4.4.1807 Least-upper-bound property of the supremum for quantum relations

**Statement.**  $sSup\ s$  is a least upper bound of  $s$ . Formally:  $IsLUB\ s\ (sSup\ s)$ .

**Proof.** Each component of the claim is established separately.

**Lean 4 source** [QLambda/Domain/instCompleteLatticeQuantumRel.lean](#)

```
theorem isLUB_sSup (s : Set (QuantumRel X Y)) :
  IsLUB s (sSup s) := by
  constructor
  * intro R hR x y
    exact le_iSup_of_le <R, hR> le_rfl
  * intro R hR x y
    apply iSup_le
    intro S
    exact (hR S.property) x y
```

#### 4.4.1808 Greatest-lower-bound property of the infimum for quantum relations

**Statement.**  $sInf\ s$  is a greatest lower bound of  $s$ . Formally:  $IsGLB\ s\ (sInf\ s)$ .

**Proof.** Each component of the claim is established separately.

**Lean 4 source** [QLambda/Domain/instCompleteLatticeQuantumRel.lean](#)

```
theorem isGLB_sInf (s : Set (QuantumRel X Y)) :
  IsGLB s (sInf s) := by
  constructor
  * intro R hR x y
    exact iInf_le_of_le <R, hR> le_rfl
  * intro R hR x y
    apply le_iInf
    intro S
    exact (hR S.property) x y
```

#### 4.4.1809 Complete lattice structure on quantum relations

**Definition.** Equip  $QuantumRel\ X\ Y$  with its canonical complete lattice structure.

**Construction.** The operations are given by: least upper bound  $s$  supremum property and greatest lower bound  $s$  infimum property. Each required law follows from the corresponding property of the underlying data.

**Lean 4 source** [QLambda/Domain/instCompleteLatticeQuantumRel.lean](#)

```
noncomputable instance instCompleteLatticeQuantumRel : CompleteLattice (QuantumRel X Y)
  where
  isLUB_sSup := isLUB_sSup
  isGLB_sInf := isGLB_sInf
```

#### 4.4.1810 Decidable equality on atoms of a quantum set of a classical set

**Definition.** Equip  $(\text{liftSet } \alpha) . \text{Atom}$  with its canonical decidable equality.

**Construction.** Inherited from the corresponding structure on the underlying carrier.

**Lean 4 source** [QLambda/Domain/instDecidableEqLiftSetAtom.lean](#)

```
instance instDecidableEqLiftSetAtom [DecidableEq a] : DecidableEq (liftSet a).Atom :=
  show DecidableEq a from inferInstance
```

#### 4.4.1811 Decidable equality on atoms of a sum

**Definition.** Equip  $(\text{sum } X \ Y) . \text{Atom}$  with its canonical decidable equality.

**Construction.** Inherited from the corresponding structure on the underlying carrier.

**Lean 4 source** [QLambda/Domain/instDecidableEqSumAtom.lean](#)

```
instance instDecidableEqSumAtom [DecidableEq X.Atom] [DecidableEq Y.Atom] :
  DecidableEq (sum X Y).Atom :=
  show DecidableEq (X.Atom ? Y.Atom) from inferInstance
```

#### 4.4.1812 Decidable equality on atoms of a tensor product

**Definition.** Equip  $(\text{tensor } X \ Y) . \text{Atom}$  with its canonical decidable equality.

**Construction.** Inherited from the corresponding structure on the underlying carrier.

**Lean 4 source** [QLambda/Domain/instDecidableEqTensorAtom.lean](#)

```
instance instDecidableEqTensorAtom [DecidableEq X.Atom] [DecidableEq Y.Atom] :
  DecidableEq (tensor X Y).Atom :=
  show DecidableEq (X.Atom x Y.Atom) from inferInstance
```

#### 4.4.1813 Finiteness on atomic quantum sets

**Definition.** Equip  $\text{atomic } n$  with its canonical finiteness.

**Construction.** Inherited from the corresponding structure on the underlying carrier.

**Lean 4 source** [QLambda/Domain/instFiniteAtomic.lean](#)

```
instance instFiniteAtomic : Finite (atomic n) where
  fintype := inferInstanceAs (Fintype PUnit)
  decidable := inferInstanceAs (DecidableEq PUnit)
```

#### 4.4.1814 Finiteness on bits

**Definition.** Equip  $\text{bit}$  with its canonical finiteness.

**Construction.** Inherited from the corresponding structure on the underlying carrier.

**Lean 4 source** [QLambda/Domain/instFiniteBit.lean](#)

```
instance instFiniteBit : Finite bit where
  fintype := inferInstanceAs (Fintype Bool)
  decidable := inferInstanceAs (DecidableEq Bool)
```

#### 4.4.1815 Finiteness on empties

**Definition.** Equip `empty` with its canonical finiteness.

**Construction.** Inherited from the corresponding structure on the underlying carrier.

**Lean 4 source** [QLambda/Domain/instFiniteEmpty.lean](#)

```
instance instFiniteEmpty : Finite empty where
  fintype := inferInstanceAs (Fintype Empty)
  decidable := inferInstanceAs (DecidableEq Empty)
```

#### 4.4.1816 Finiteness on quantum sets of a classical set

**Definition.** Equip `liftSet  $\alpha$`  with its canonical finiteness.

**Construction.** Inherited from the corresponding structure on the underlying carrier.

**Lean 4 source** [QLambda/Domain/instFiniteLiftSet.lean](#)

```
instance instFiniteLiftSet [Fintype a] [DecidableEq a] : Finite (liftSet a) where
  fintype := inferInstanceAs (Fintype a)
  decidable := inferInstanceAs (DecidableEq a)
```

#### 4.4.1817 Finiteness on qubits

**Definition.** Equip `qubit` with its canonical finiteness.

**Construction.** Inherited from the corresponding structure on the underlying carrier.

**Lean 4 source** [QLambda/Domain/instFiniteQubit.lean](#)

```
instance instFiniteQubit : Finite qubit where
  fintype := inferInstanceAs (Fintype PUnit)
  decidable := inferInstanceAs (DecidableEq PUnit)
```

#### 4.4.1818 Finiteness on sums

**Definition.** Equip `sum X Y` with its canonical finiteness.

**Construction.** Inherited from the corresponding structure on the underlying carrier.

**Lean 4 source** [QLambda/Domain/instFiniteSum.lean](#)

```
instance instFiniteSum [Finite X] [Finite Y] : Finite (sum X Y) where
  fintype := inferInstanceAs (Fintype (X.Atom ? Y.Atom))
  decidable := inferInstanceAs (DecidableEq (X.Atom ? Y.Atom))
```



#### 4.4.1819 Finiteness on tensor products

**Definition.** Equip `tensor X Y` with its canonical finiteness.

**Construction.** Inherited from the corresponding structure on the underlying carrier.

**Lean 4 source** `QLambda/Domain/instFiniteTensor.lean`

```
instance instFiniteTensor [Finite X] [Finite Y] : Finite (tensor X Y) where
  fintype := inferInstanceAs (Fintype (X.Atom x Y.Atom))
  decidable := inferInstanceAs (DecidableEq (X.Atom x Y.Atom))
```

#### 4.4.1820 Finiteness on units

**Definition.** Equip `unit` with its canonical finiteness.

**Construction.** Inherited from the corresponding structure on the underlying carrier.

**Lean 4 source** `QLambda/Domain/instFiniteUnit.lean`

```
instance instFiniteUnit : Finite unit where
  fintype := inferInstanceAs (Fintype PUnit)
  decidable := inferInstanceAs (DecidableEq PUnit)
```

#### 4.4.1821 Finite enumeration on atoms of a quantum set of a classical set

**Definition.** Equip `(liftSet α).Atom` with its canonical finite enumeration.

**Construction.** Inherited from the corresponding structure on the underlying carrier.

**Lean 4 source** `QLambda/Domain/instFintypeLiftSetAtom.lean`

```
instance instFintypeLiftSetAtom [Fintype a] : Fintype (liftSet a).Atom :=
  show Fintype a from inferInstance
```

#### 4.4.1822 Arbitrary meets on quantum relations

**Definition.** Equip `QuantumRel X Y` with its canonical arbitrary meets.

**Construction.** Given by the infimum of  $s, := \langle \text{fun } x \ y \Rightarrow \bigcap R : s, R.1.\text{component } x \ y \rangle$ .

**Lean 4 source** `QLambda/Domain/instInfSetQuantumRel.lean`

```
instance instInfSetQuantumRel : InfSet (QuantumRel X Y) where
  sInf s := <fun x y => ? R : s, R.1.component x y>
```

#### 4.4.1823 Distinguished inhabitant on atoms of an atomic quantum set

**Definition.** Equip `(atomic n).Atom` with its canonical distinguished inhabitant.

**Construction.** Given by `⟨PUnit.unit⟩`.

**Lean 4 source** `QLambda/Domain/instInhabitedAtomicAtom.lean`

```
instance instInhabitedAtomicAtom : Inhabited (atomic n).Atom := <PUnit.unit>
```

#### 4.4.1824 Distinguished inhabitant on atoms of a qubit

**Definition.** Equip `qubit.Atom` with its canonical distinguished inhabitant.

**Construction.** Given by `<PUnit.unit>`.

**Lean 4 source** `QLambda/Domain/instInhabitedQubitAtom.lean`

```
instance instInhabitedQubitAtom : Inhabited qubit.Atom := <PUnit.unit>
```

#### 4.4.1825 Distinguished inhabitant on atoms of a unit

**Definition.** Equip `unit.Atom` with its canonical distinguished inhabitant.

**Construction.** Given by `<PUnit.unit>`.

**Lean 4 source** `QLambda/Domain/instInhabitedUnitAtom.lean`

```
instance instInhabitedUnitAtom : Inhabited unit.Atom := <PUnit.unit>
```

#### 4.4.1826 Order relation on atoms of a quantum set of a classical set

**Definition.** Equip `(liftSet  $\alpha$ ).Atom` with its canonical order relation.

**Construction.** Inherited from the corresponding structure on the underlying carrier.

**Lean 4 source** `QLambda/Domain/instLELiftSetAtom.lean`

```
instance instLELiftSetAtom [LE a] : LE (liftSet a).Atom :=
  show LE a from inferInstance
```

#### 4.4.1827 Order relation on $\omega$ -continuous maps

**Definition.** Equip `OmegaMap D E` with its canonical order relation.

**Construction.** Given by `<fun f g =>  $\forall x, f x \leq g x$ >`.

**Lean 4 source** `QLambda/Domain/instLEOmegaMap.lean`

```
instance instLEOmegaMap : LE (OmegaMap D E) :=
  <fun f g => forall x, f x <= g x>
```

#### 4.4.1828 Order relation on quantum functions

**Definition.** Equip `QuantumFunction P Q` with its canonical order relation.

**Construction.** Given by `le F G := G.rel  $\leq$  Q.order.comp F.rel`.

**Lean 4 source** `QLambda/Domain/instLEQuantumFunction.lean`

```
instance instLEQuantumFunction {P Q : QuantumPoset} : LE (QuantumFunction P Q) where
  le F G := G.rel <= Q.order.comp F.rel
```

#### 4.4.1829 Order relation on quantum relations

**Definition.** Equip `QuantumRel X Y` with its canonical order relation.

**Construction.** Given by `le R S :=  $\forall x y, R.component\ x\ y \leq S.component\ x\ y$` .

**Lean 4 source** [QLambda/Domain/instLEQuantumRel.lean](#)

```
instance instLEQuantumRel : LE (QuantumRel X Y) where
  le R S := forall x y, R.component x y <= S.component x y
```

#### 4.4.1830 Order relation on Scott-continuous functions

**Definition.** Equip `ScottFunction P Q` with its canonical order relation.

**Construction.** Given by `le F G := F.toQuantumFunction  $\leq$  G.toQuantumFunction`.

**Lean 4 source** [QLambda/Domain/instLEScottFunction.lean](#)

```
instance instLEScottFunction {P Q : QuantumCPO} : LE (ScottFunction P Q) where
  le F G := F.toQuantumFunction <= G.toQuantumFunction
```

#### 4.4.1831 Order relation on set maps

**Definition.** Equip `SetHom A B` with its canonical order relation.

**Construction.** Given by `<fun f g => f = g>`.

**Lean 4 source** [QLambda/Domain/instLESetHom.lean](#)

```
instance instLESetHom {A B : Type u} : LE (SetHom A B) :=
  <fun f g => f = g>
```

#### 4.4.1832 Lattice structure on quantum relations

**Definition.** Equip `QuantumRel X Y` with its canonical lattice structure.

**Construction.** Given by the canonical construction on the underlying data.

**Lean 4 source** [QLambda/Domain/instLatticeQuantumRel.lean](#)

```
instance instLatticeQuantumRel : Lattice (QuantumRel X Y) where
```

#### 4.4.1833 Proposition 3.3.1: the limit of a chain of Scott-continuous functions is Scott continuous

**Definition.** Proposition 3.3.1: the limit of a chain of Scott-continuous functions is Scott continuous.

**Construction.** Constructed by supplying each component: passage to quantum function and continuous. The accompanying laws are verified from the definitions.

**Lean 4 source** `QLambda/Domain/instOmegaComplete.lean`

```
noncomputable def scottLimit
  (K : Nat -> ScottFunction P Q) (hK : Monotone K) :
  ScottFunction P Q where
toQuantumFunction :=
  functionLimit (fun n => (K n).toQuantumFunction) (by
    intro n m hnm
    exact hK hnm)
continuous := by
  intro d L Linf hL hLinf
  let c : Nat -> QuantumFunction P.poset Q.poset :=
    fun n => (K n).toQuantumFunction
  have hc : Monotone c := by
    intro n m hnm
    exact hK hnm
  have hhom :
    Q.poset.order.comp (functionLimit c hc).rel =
      ? n, Q.poset.order.comp (c n).rel :=
    functionLimit_tends c hc
  have hcont :
    forall n,
      (Q.poset.order.comp (c n).rel).comp Linf.rel =
        ? m, (Q.poset.order.comp (c n).rel).comp (L m).rel := by
    intro n
    have hn := (K n).continuous d L Linf hL hLinf
    change
      Q.poset.order.comp ((c n).rel.comp Linf.rel) =
        ? m, Q.poset.order.comp ((c n).rel.comp (L m).rel) at hn
    simpa only [QuantumRel.assoc] using hn
  change
    Q.poset.order.comp ((functionLimit c hc).rel.comp Linf.rel) =
      ? m, Q.poset.order.comp
        ((functionLimit c hc).rel.comp (L m).rel)
  calc
    Q.poset.order.comp ((functionLimit c hc).rel.comp Linf.rel) =
      (Q.poset.order.comp (functionLimit c hc).rel).comp Linf.rel :=
      (QuantumRel.assoc _ _ _).symm
    _ = (? n, Q.poset.order.comp (c n).rel).comp Linf.rel :=
      congrArg (fun S => S.comp Linf.rel) hhom
    _ = ? n, (Q.poset.order.comp (c n).rel).comp Linf.rel :=
      QuantumRel.iInf_comp_of_function
        (fun n => Q.poset.order.comp (c n).rel)
        Linf.rel Linf.isFunction
    _ = ? n, ? m,
      (Q.poset.order.comp (c n).rel).comp (L m).rel := by
      congr 1
      funext n
      exact hcont n
    _ = ? m, ? n,
```

```

      (Q.poset.order.comp (c n).rel).comp (L m).rel :=
    iInf_comm
  _ = ? m, (? n, Q.poset.order.comp (c n).rel).comp (L m).rel := by
    congr 1
    funext m
    exact (QuantumRel.iInf_comp_of_function
      (fun n => Q.poset.order.comp (c n).rel)
      (L m).rel (L m).isFunction).symm
  _ = ? m,
    (Q.poset.order.comp (functionLimit c hc).rel).comp (L m).rel := by
    rw [hhom]
  _ = ? m, Q.poset.order.comp
    ((functionLimit c hc).rel.comp (L m).rel) := by
    simp only [QuantumRel.assoc]

```

#### 4.4.1834 Scott limit of the convergence for Scott-continuous functions

**Statement.** If  $K$  is monotone, then the composition of  $(\text{scottLimit } K \text{ hK}).\text{rel}$  equals  $\bigcap n, Q.\text{poset.order.comp } (K n).\text{rel}$ .

**Proof.** This is an instance of the function limit of the convergence, applied to the hypothesis that  $K$  is monotone.

**Lean 4 source** [QLambda/Domain/instOmegaComplete.lean](#)

```

theorem scottLimit_tends
  (K : Nat -> ScottFunction P Q) (hK : Monotone K) :
  Q.poset.order.comp (scottLimit K hK).rel =
    ? n, Q.poset.order.comp (K n).rel :=
  functionLimit_tends (fun n => (K n).toQuantumFunction) hK

```

#### 4.4.1835 Scott limit of the least-upper-bound property for Scott-continuous functions

**Statement.** If  $K$  is monotone, then  $\text{scottLimit } K \text{ hK}$  is a least upper bound of  $\text{Set.range } K$ .

**Proof.** Each component of the claim is established separately.

**Lean 4 source** [QLambda/Domain/instOmegaComplete.lean](#)

```

theorem scottLimit_isLUB
  (K : Nat -> ScottFunction P Q) (hK : Monotone K) :
  IsLUB (Set.range K) (scottLimit K hK) := by
  have hq := functionLimit_isLUB
    (fun n => (K n).toQuantumFunction) hK
  constructor
  * rintro F <n, rfl>
    exact hq.1 <n, rfl>
  * intro F hF
    apply hq.2
    rintro _ <n, rfl>
    exact hF <n, rfl>

```

#### 4.4.1836 $\omega$ -completeness on Scott-continuous functions

**Definition.** Equip `ScottFunction P Q` with its canonical  $\omega$ -completeness.

**Construction.** The operations are given by: supremum of an  $\omega$ -chain. Each required law follows from the corresponding property of the underlying data.

#### Lean 4 source `QLambda/Domain/instOmegaComplete.lean`

```
noncomputable instance instOmegaComplete
  (P Q : QuantumCPO) : OmegaComplete (ScottFunction P Q) where
  ?Sup := scottLimit
  le_?Sup K hK n := (scottLimit_isLUB K hK).1 <n, rfl>
  ?Sup_le K hK F hF := (scottLimit_isLUB K hK).2 (by
    rintro _ <n, rfl>
    exact hF n)
```

#### 4.4.1837 $\omega$ -completeness on $\omega$ -continuous maps

**Definition.** Equip `OmegaMap D E` with its canonical  $\omega$ -completeness.

**Construction.** The operations are given by: monotonicity and functorial action supremum of an  $\omega$ -chain. Each required law follows from the corresponding property of the underlying data.

#### Lean 4 source `QLambda/Domain/instOmegaCompleteFunctionSpace.lean`

```
noncomputable instance instOmegaCompleteFunctionSpace :
  OmegaComplete (OmegaMap D E) where
  ?Sup c hc :=
  { toFun := fun x =>
    OmegaComplete.?Sup (fun n => c n x)
    (fun _ _ h => hc h x)
  monotone := by
    intro x y hxy
    exact OmegaComplete.?Sup_mono _ _
      (fun n => (c n).monotone hxy)
  map_?Sup := by
    intro x hx
    apply le_antisymm
    * apply OmegaComplete.?Sup_le
      intro n
      rw [(c n).map_?Sup x hx]
      apply OmegaComplete.?Sup_le
      intro m
      let k := max n m
      have hnk : n <= k := Nat.le_max_left _ _
      have hmk : m <= k := Nat.le_max_right _ _
      calc
        c n (x m) <= c k (x m) := hc hnk _
        _ <= c k (x k) := (c k).monotone (hx hmk)
        _ <= OmegaComplete.?Sup (fun j => c j (x k))
          (fun _ _ h => hc h _) :=
          OmegaComplete.le_?Sup (fun j => c j (x k))
            (fun _ _ h => hc h _) k
    _ <= OmegaComplete.?Sup
      (fun r => OmegaComplete.?Sup (fun j => c j (x r)))
```

```

      (fun _ _ h => hc h _)
    (fun a b hab =>
      OmegaComplete.?Sup_mono _ _
      (fun j => (c j).monotone (hx hab))) :=
    OmegaComplete.le_?Sup
      (fun r => OmegaComplete.?Sup (fun j => c j (x r))
      (fun _ _ h => hc h _))
    (fun a b hab =>
      OmegaComplete.?Sup_mono _ _
      (fun j => (c j).monotone (hx hab))) k
  * apply OmegaComplete.?Sup_le
    intro m
    apply OmegaComplete.?Sup_le
    intro n
    let k := max n m
    have hnk : n <= k := Nat.le_max_left _ _
    have hmk : m <= k := Nat.le_max_right _ _
    calc
      c n (x m) <= c k (x m) := hc hnk _
      _ <= c k (x k) := (c k).monotone (hx hmk)
      _ <= c k (OmegaComplete.?Sup x hx) :=
      (c k).monotone (OmegaComplete.le_?Sup x hx k)
      _ <= OmegaComplete.?Sup
      (fun j => c j (OmegaComplete.?Sup x hx))
      (fun _ _ h => hc h _) :=
      OmegaComplete.le_?Sup
      (fun j => c j (OmegaComplete.?Sup x hx))
      (fun _ _ h => hc h _) k }
  le_?Sup c hc n x :=
    OmegaComplete.le_?Sup (fun k => c k x)
    (fun _ _ h => hc h x) n
  ?Sup_le c hc f hf x :=
    OmegaComplete.?Sup_le (fun n => c n x)
    (fun _ _ h => hc h x) (f x) (fun n => hf n x)

```

#### 4.4.1838 $\omega$ -completeness on ds

**Definition.** Equip  $D$  with its canonical  $\omega$ -completeness.

**Construction.** Given by the displayed expression.

**Lean 4 source** `QLambda/Domain/instOmegaCompleteOfCompleteLattice.lean`

```

noncomputable instance instOmegaCompleteOfCompleteLattice (D : Type u) [
  CompleteLattice D] : OmegaComplete D where
  ?Sup c _ := bigcup n, c n
  le_?Sup c _ n := le_iSup c n
  ?Sup_le _ _ _ h := iSup_le h

```

#### 4.4.1839 $\omega$ -completeness on ds

**Definition.** Equip  $D \times E$  with its canonical  $\omega$ -completeness.

**Construction.** Given by the displayed expression.

#### Lean 4 source `QLambda/Domain/instOmegaCompleteProd.lean`

```
noncomputable instance instOmegaCompleteProd
  {D : Type u} {E : Type v}
  [PartialOrder D] [OmegaComplete D]
  [PartialOrder E] [OmegaComplete E] :
  OmegaComplete (D × E) where
  ?Sup c hc :=
    (OmegaComplete.?Sup (fun n => (c n).1)
     (fun _ _ h => (hc h).1),
     OmegaComplete.?Sup (fun n => (c n).2)
     (fun _ _ h => (hc h).2))
  le_?Sup c hc n :=
    <OmegaComplete.le_?Sup (fun k => (c k).1)
      (fun _ _ h => (hc h).1) n,
    OmegaComplete.le_?Sup (fun k => (c k).2)
      (fun _ _ h => (hc h).2) n>
  ?Sup_le c hc x hx :=
    <OmegaComplete.?Sup_le (fun k => (c k).1)
      (fun _ _ h => (hc h).1) x.1
      (fun n => (hx n).1),
    OmegaComplete.?Sup_le (fun k => (c k).2)
      (fun _ _ h => (hc h).2) x.2
      (fun n => (hx n).2)>
```

#### 4.4.1840 $\omega$ -completeness on set maps

**Definition.** Equip  $\text{SetHom } A \ B$  with its canonical  $\omega$ -completeness.

**Construction.** Given by the displayed expression.

#### Lean 4 source `QLambda/Domain/instOmegaCompleteSetHom.lean`

```
noncomputable instance instOmegaCompleteSetHom {A B : Type u} : OmegaComplete (SetHom
  A B) where
  ?Sup c _ := c 0
  le_?Sup c hc n := chain_eq_zero c hc n
  ?Sup_le _ _ _ hx := hx 0
```

#### 4.4.1841 Least element on $\omega$ -continuous maps

**Definition.** Equip  $\text{OmegaMap } D \ E$  with its canonical least element.

**Construction.** The operations are given by: bottom element, monotonicity and functorial action supremum of an  $\omega$ -chain. Each required law follows from the corresponding property of the underlying data.

#### Lean 4 source `QLambda/Domain/instOrderBotOmegaMap.lean`

```
instance instOrderBotOmegaMap [OrderBot E] : OrderBot (OmegaMap D E) where
  bot :=
    { toFun := fun _ => False
      monotone := fun _ _ _ => le_rfl
      map_?Sup := fun c hc => by
        apply le_antisymm
        * exact bot_le
```



```

    * exact OmegaComplete.?Sup_le (fun _ => False)
      ((monotone_const).comp hc) False (fun _ => le_refl) }
bot_le _ _ := bot_le

```

#### 4.4.1842 Partial order on atoms of a quantum set of a classical set

**Definition.** Equip  $(\text{liftSet } \alpha). \text{Atom}$  with its canonical partial order.

**Construction.** Inherited from the corresponding structure on the underlying carrier.

**Lean 4 source** [QLambda/Domain/instPartialOrderLiftSetAtom.lean](#)

```

instance instPartialOrderLiftSetAtom [PartialOrder a] : PartialOrder (liftSet a).Atom
:=
  show PartialOrder a from inferInstance

```

#### 4.4.1843 Extensionality for $\omega$ -continuous maps

**Statement.** If for every  $x$ ,  $f \ x = g \ x$ , then  $f = g$ . Formally:  $f = g$ .

**Proof.** By case analysis on  $f$ . The goal is simplified using function extensionality.

**Lean 4 source** [QLambda/Domain/instPartialOrderOmegaMap.lean](#)

```

theorem ext {f g : OmegaMap D E} (h : forall x, f x = g x) : f = g := by
  cases f
  cases g
  simp only [mk.injEq]
  exact funext h

```

#### 4.4.1844 Partial order on $\omega$ -continuous maps

**Definition.** Equip  $\text{OmegaMap } D \ E$  with its canonical partial order.

**Construction.** Given by the displayed expression.

**Lean 4 source** [QLambda/Domain/instPartialOrderOmegaMap.lean](#)

```

instance instPartialOrderOmegaMap : PartialOrder (OmegaMap D E) where
  le_refl _ _ := le_refl
  le_trans _ _ _ hfg hgh x := (hfg x).trans (hgh x)
  le_antisymm f g hfg hgf := by
    ext x
    exact le_antisymm (hfg x) (hgf x)

```

#### 4.4.1845 Definition of the order for quantum functions

**Statement.**  $F \leq G$  if and only if  $G.\text{rel} \leq Q.\text{order}.\text{comp } F.\text{rel}$ . Formally:  $F \leq G \leftrightarrow G.\text{rel} \leq Q.\text{order}.\text{comp } F.\text{rel}$ .

**Proof.** Both sides are the same proposition once the definitions are unfolded.

**Lean 4 source** [QLambda/Domain/instPartialOrderQuantumFunction.lean](#)

```

theorem le_def {P Q : QuantumPoset} {F G : QuantumFunction P Q} :
  F <= G <-> G.rel <= Q.order.comp F.rel :=
  Iff.rfl

```

#### 4.4.1846 Monotonicity of the restriction to an atom

**Statement.** If  $F \leq G$ , then  $\text{restrictAtom } F \ x \leq \text{restrictAtom } G \ x$ . Formally:  $\text{restrictAtom } F \ x \leq \text{restrictAtom } G \ x$ .

**Proof.** The key step rewrites with the restriction to an atom of a composite for quantum relations and the monotonicity of the restriction to an atom.

**Lean 4 source** [QLambda/Domain/instPartialOrderQuantumFunction.lean](#)

```

theorem restrictAtom_mono {P Q : QuantumPoset}
  {F G : QuantumFunction P Q} (h : F <= G) (x : P.carrier.Atom) :
  restrictAtom F x <= restrictAtom G x := by
  change QuantumRel.restrictAtom G.rel x <=
  Q.order.comp (QuantumRel.restrictAtom F.rel x)
  rw [ <- QuantumRel.restrictAtom_comp ]
  exact QuantumRel.restrictAtom_mono h x

```

#### 4.4.1847 The fifth characterization of the pointwise order from KLM Lemma 2.6.6

**Statement.** The fifth characterization of the pointwise order from KLM Lemma 2.6.6. Formally:  $G.\text{rel}.\text{comp } F.\text{rel}.\text{dagger} \leq Q.\text{order}$ .

**Proof.** The claim follows from a chain of equalities (or inequalities).

**Lean 4 source** [QLambda/Domain/instPartialOrderQuantumFunction.lean](#)

```

theorem comp_dagger_le_order {P Q : QuantumPoset}
  {F G : QuantumFunction P Q} (h : F <= G) :
  G.rel.comp F.rel.dagger <= Q.order := by
  calc
    G.rel.comp F.rel.dagger
      <= (Q.order.comp F.rel).comp F.rel.dagger :=
      QuantumRel.comp_mono_left F.rel.dagger h
    _ = Q.order.comp (F.rel.comp F.rel.dagger) :=
      QuantumRel.assoc _ _ _
    _ <= Q.order.comp (QuantumRel.id Q.carrier) :=
      QuantumRel.comp_mono_right F.isFunction.1
    _ = Q.order := QuantumRel.comp_id _

```

#### 4.4.1848 Quantum-function homs carry the published pointwise partial order

**Definition.** Quantum-function homs carry the published pointwise partial order.

**Construction.** Given by the displayed expression.

**Lean 4 source** [QLambda/Domain/instPartialOrderQuantumFunction.lean](#)

```

instance instPartialOrderQuantumFunction {P Q : QuantumPoset} : PartialOrder (
  QuantumFunction P Q) where
  le_refl F := by
    calc
      F.rel = (QuantumRel.id Q.carrier).comp F.rel :=
        (QuantumRel.id_comp F.rel).symm
      _ <= Q.order.comp F.rel :=
        QuantumRel.comp_mono_left F.rel Q.reflexive
  le_trans F G H hFG hGH := by
    calc
      H.rel <= Q.order.comp G.rel := hGH
      _ <= Q.order.comp (Q.order.comp F.rel) :=
        QuantumRel.comp_mono_right hFG
      _ = (Q.order.comp Q.order).comp F.rel :=
        (QuantumRel.assoc _ _ _).symm
      _ <= Q.order.comp F.rel :=
        QuantumRel.comp_mono_left F.rel Q.transitive
  le_antisymm F G hFG hGF := by
    apply ext
    have hGFdag :
      G.rel.comp F.rel.dagger <= Q.order.dagger := by
      have h := QuantumRel.dagger_mono (comp_dagger_le_order hGF)
      rw [QuantumRel.dagger_comp, QuantumRel.dagger_dagger] at h
      exact h
    have hFGdag :
      F.rel.comp G.rel.dagger <= Q.order.dagger := by
      have h := QuantumRel.dagger_mono (comp_dagger_le_order hFG)
      rw [QuantumRel.dagger_comp, QuantumRel.dagger_dagger] at h
      exact h
    have hid :
      G.rel.comp F.rel.dagger <= QuantumRel.id Q.carrier :=
      (le_inf (comp_dagger_le_order hFG) hGFdag).trans Q.antisymmetric
    have hid' :
      F.rel.comp G.rel.dagger <= QuantumRel.id Q.carrier :=
      (le_inf (comp_dagger_le_order hGF) hFGdag).trans Q.antisymmetric
    apply le_antisymm
  * calc
      F.rel = F.rel.comp (QuantumRel.id P.carrier) :=
        (QuantumRel.comp_id F.rel).symm
      _ <= F.rel.comp (G.rel.dagger.comp G.rel) :=
        QuantumRel.comp_mono_right G.isFunction.2
      _ = (F.rel.comp G.rel.dagger).comp G.rel :=
        (QuantumRel.assoc _ _ _).symm
      _ <= (QuantumRel.id Q.carrier).comp G.rel :=
        QuantumRel.comp_mono_left G.rel hid'
      _ = G.rel := QuantumRel.id_comp _
  * calc
      G.rel = G.rel.comp (QuantumRel.id P.carrier) :=
        (QuantumRel.comp_id G.rel).symm
      _ <= G.rel.comp (F.rel.dagger.comp F.rel) :=
        QuantumRel.comp_mono_right F.isFunction.2
      _ = (G.rel.comp F.rel.dagger).comp F.rel :=
        (QuantumRel.assoc _ _ _).symm
      _ <= (QuantumRel.id Q.carrier).comp F.rel :=
        QuantumRel.comp_mono_left F.rel hid
      _ = F.rel := QuantumRel.id_comp _

```

#### 4.4.1849 Partial order on quantum relations

**Definition.** Equip `QuantumRel X Y` with its canonical partial order.

**Construction.** Given by the displayed expression.

**Lean 4 source** `QLambda/Domain/instPartialOrderQuantumRel.lean`

```
instance instPartialOrderQuantumRel : PartialOrder (QuantumRel X Y) where
  le_refl _ _ _ := le_refl
  le_trans _ _ _ hRS hST x y := (hRS x y).trans (hST x y)
  le_antisymm R S hRS hSR := by
    cases R
    cases S
    congr 1
    funext x y
    exact le_antisymm (hRS x y) (hSR x y)
```

#### 4.4.1850 Partial order on Scott-continuous functions

**Definition.** Equip `ScottFunction P Q` with its canonical partial order.

**Construction.** Given by the displayed expression.

**Lean 4 source** `QLambda/Domain/instPartialOrderScottFunction.lean`

```
instance instPartialOrderScottFunction {P Q : QuantumCPO} : PartialOrder (
  ScottFunction P Q) where
  le_refl F := by
    change F.toQuantumFunction <= F.toQuantumFunction
    exact le_refl
  le_trans F G H hFG hGH := by
    change F.toQuantumFunction <= H.toQuantumFunction
    change F.toQuantumFunction <= G.toQuantumFunction at hFG
    change G.toQuantumFunction <= H.toQuantumFunction at hGH
    exact hFG.trans hGH
  le_antisymm F G hFG hGF :=
    ext (le_antisymm hFG hGF)
```

#### 4.4.1851 Partial order on set maps

**Definition.** Equip `SetHom A B` with its canonical partial order.

**Construction.** Given by the displayed expression.

**Lean 4 source** `QLambda/Domain/instPartialOrderSetHom.lean`

```
instance instPartialOrderSetHom {A B : Type u} : PartialOrder (SetHom A B) where
  le_refl _ := rfl
  le_trans _ _ _ := Eq.trans
  le_antisymm _ _ hfg _ := hfg
```

#### 4.4.1852 An increasing chain in a discrete order is constant

**Statement.** An increasing chain in a discrete order is constant. Formally:  $c\ n = c\ 0$ .

**Proof.** The proof term combines the facts named in it directly.

##### Lean 4 source `QLambda/Domain/instPartialOrderSetHom.lean`

```
theorem chain_eq_zero {A B : Type u} (c : Nat -> SetHom A B)
  (hc : Monotone c) (n : Nat) : c n = c 0 :=
  (hc (Nat.zero_le n)).symm
```

#### 4.4.1853 Preorder on CP presentations

**Definition.** Equip `CPPresentation n m` with its canonical preorder.

**Construction.** Given by the displayed expression.

##### Lean 4 source `QLambda/Domain/instPreorderCPPresentation.lean`

```
noncomputable instance instPreorderCPPresentation (n m : Nat) :
  Preorder (CPPresentation n m) where
  le K L := KrausFamily.ResidualRefines K.kraus L.kraus
  lt K L :=
    KrausFamily.ResidualRefines K.kraus L.kraus /\
    not KrausFamily.ResidualRefines L.kraus K.kraus
  le_refl K := KrausFamily.residualRefines_refl K.kraus
  le_trans _ _ _ := KrausFamily.residualRefines_trans
  lt_iff_le_not_ge _ _ := Iff.rfl
```

#### 4.4.1854 Preorder on atoms of a quantum set of a classical set

**Definition.** Equip `(liftSet  $\alpha$ ).Atom` with its canonical preorder.

**Construction.** Inherited from the corresponding structure on the underlying carrier.

##### Lean 4 source `QLambda/Domain/instPreorderLiftSetAtom.lean`

```
instance instPreorderLiftSetAtom [Preorder a] : Preorder (liftSet a).Atom :=
  show Preorder a from inferInstance
```

#### 4.4.1855 Meet-semilattice structure on quantum relations

**Definition.** Equip `QuantumRel X Y` with its canonical meet-semilattice structure.

**Construction.** The operations are given by: infimum order left, infimum order right and order infimum. Each required law follows from the corresponding property of the underlying data.

##### Lean 4 source `QLambda/Domain/instSemilatticeInfQuantumRel.lean`

```
instance instSemilatticeInfQuantumRel : SemilatticeInf (QuantumRel X Y) where
  inf R S := <fun x y => R.component x y sqcap S.component x y>
  inf_le_left := fun _ _ _ => inf_le_left
  inf_le_right := fun _ _ _ => inf_le_right
  le_inf := fun _ _ hR hS x y => le_inf (hR x y) (hS x y)
```

#### 4.4.1856 Join-semilattice structure on quantum relations

**Definition.** Equip `QuantumRel X Y` with its canonical join-semilattice structure.

**Construction.** The operations are given by: order supremum left, order supremum right and supremum order. Each required law follows from the corresponding property of the underlying data.

**Lean 4 source** `QLambda/Domain/instSemilatticeSupQuantumRel.lean`

```
instance instSemilatticeSupQuantumRel : SemilatticeSup (QuantumRel X Y) where
  sup R S := <fun x y => R.component x y sqsup S.component x y>
  le_sup_left := fun _ _ _ => le_sup_left
  le_sup_right := fun _ _ _ => le_sup_right
  sup_le := fun _ _ _ hR hS x y => sup_le (hR x y) (hS x y)
```

#### 4.4.1857 Arbitrary joins on quantum relations

**Definition.** Equip `QuantumRel X Y` with its canonical arbitrary joins.

**Construction.** Given by the supremum of  $s$ ,  $:= \langle \text{fun } x \ y \Rightarrow \bigcup R : s, R.1.\text{component } x \ y \rangle$ .

**Lean 4 source** `QLambda/Domain/instSupSetQuantumRel.lean`

```
instance instSupSetQuantumRel : SupSet (QuantumRel X Y) where
  sSup s := <fun x y => bigcup R : s, R.1.component x y>
```

#### 4.4.1858 Top element on quantum relations

**Definition.** Equip `QuantumRel X Y` with its canonical top element.

**Construction.** Given by `<top>`.

**Lean 4 source** `QLambda/Domain/instTopQuantumRel.lean`

```
instance instTopQuantumRel : Top (QuantumRel X Y) := <top>
```

#### 4.4.1859 Unique inhabitant on atoms of an atomic quantum set

**Definition.** Equip `(atomic n).Atom` with its canonical unique inhabitant.

**Construction.** Inherited from the corresponding structure on the underlying carrier.

**Lean 4 source** `QLambda/Domain/instUniqueAtomicAtom.lean`

```
instance instUniqueAtomicAtom : Unique (atomic n).Atom := inferInstanceAs (Unique PUnit)
```

#### 4.4.1860 Unique inhabitant on atoms of a qubit

**Definition.** Equip `qubit.Atom` with its canonical unique inhabitant.

**Construction.** Inherited from the corresponding structure on the underlying carrier.

**Lean 4 source** `QLambda/Domain/instUniqueQubitAtom.lean`

```
instance instUniqueQubitAtom : Unique qubit.Atom := inferInstanceAs (Unique PUnit)
```

#### 4.4.1861 Unique inhabitant on atoms of a unit

**Definition.** Equip `unit.Atom` with its canonical unique inhabitant.

**Construction.** Inherited from the corresponding structure on the underlying carrier.

**Lean 4 source** `QLambda/Domain/instUniqueUnitAtom.lean`

```
instance instUniqueUnitAtom : Unique unit.Atom := inferInstanceAs (Unique PUnit)
```

## 5 Type-Indexed Denotation and Recursive Types

This section separates the kernel-checked Route~A fragment denotation from the intended full-language model. The fragment package (first-order data, linear FO-domain arrows, unrestricted bit binders, primitives, measurement; no  $\mu/\text{fix}$ ) supplies compositional `FragCert.denote`, classical-bit Day contexts, closed  $\beta/\text{Step}$  laws, measured new0 Born adequacy, and the  $N$ -qubit OpenQASM staging interface; see §9. The intended full-language interpretation still assigns

$$\llbracket \Gamma; \Delta \rrbracket = F\llbracket \Gamma \rrbracket \otimes \llbracket \Delta \rrbracket.$$

Tensor and arrows are to be interpreted by the monoidal and closed structure. Primitives are to embed the checked presentation-independent finite CP classes, and measurement is to be interpreted as a finite instrument into a classical sum while retaining the post-measurement qubit.

For a strictly positive recursive body  $A(\alpha)$ , the intended object  $\llbracket \mu\alpha.A \rrbracket$  is the bilimit of its finite unfolding chain. `QLambda/Domain/RecursiveTypes.lean` constructs the carrier of compatible approximants and its complete-lattice structure. Dropping and restoring the zeroth approximation define inverse  $\omega$ -continuous maps, packaged as `ProjectionChain.shiftIso`. `QLambda.Palomar.shift_forward_backward` and `QLambda.Palomar.shift_backward_forward` are the two inverse equations of that shift on an arbitrary `ProjectionChain`. It does not yet construct the source-type functor or connect strict positivity to a concrete unfolding chain.

`QLambda/Linear/Denotation.lean` records the operations needed by every typing rule, its desired constructor equations, and presentation-independent finite CP meanings for physical primitives. No concrete full-language `DenotationModel` instance exists. Classical beta, fix unfolding, and fold/unfold are exact only in the operational quotient generated by source reduction; these are not yet full-language denotational soundness or adequacy theorems.

The finite CP substrate for that target is now checked: intrinsic Choi maps are equivalent to the existing completed Kraus classes, TNI superoperators contain allocation, reset, gates, and measurement branches, and specialized modules have Yoneda, representable Day tensor, representable internal hom, and finite symmetric powers. First-order source types (unit, bits, qubits, and their tensors) have representable objects, and every source primitive agrees with its intrinsic superoperator (`QLambda.Palomar.prim_cp_agreement`, and `QLambda.Palomar.cx_cp_agreement` for `cx`). `QLambda.Palomar.measure_elim_denotation` equates `FragCert.denote closed_measure_new0_cert`

with the `measureElim` spine. The symmetric series has weakening, dereliction, contraction, and promotion along finite basis equivalences.

A stronger fragment is now kernel checked for low dimensions. For every system of dimension  $A \leq 1$ , the formal series exponential carries a genuine Day comonoid structure and satisfies the cofree universal property

$$\text{ComonoidHom}(C, !A) \cong \text{Hom}(C, y(A)),$$

inducing co-Kleisli promotion  $\text{Hom}(!B, A) \rightarrow \text{Hom}(!B, !A)$ . At the same time, two TNI obstructions are checked. Complementary computational-basis effects on a qubit sum to discard, but composition with matching isometric preparations yields two copies of  $\text{id}_1$ , which admit no TNI Choi sum; hence generic joint precomposition at fiber dimension  $d \geq 2$  fails for representable modules. Separately, every canonical homogeneous bang split of total degree  $k$  has the same effect as the unsplit coefficient, so the joint effect is  $(k + 1)$  copies of that effect: the proposed raw Route~A joint-effect bound already fails at  $A = 2$ , degree 1. These refutations do not by themselves prove failure of every Day-bilinear admissibility predicate: transferring the effect witness into `BangComultComponentsAdmissible` requires an explicit bilinear that recovers both ordered degree-one splits in one TNI fiber (`BangComultDayTransferWitness`). We prove that any such witness implies  $\neg \text{BangComultComponentsAdmissible } 2$  by extracting the selected two-term row through flattening and reindexing, but no TNI/representable construction of the witness is given (fixed projection pairs recover only one ordering; product modules separate summands; unscaled addition of both orderings leaves the TNI carrier). Gate~L8 therefore publishes the named replacement category `AmbientCPDayBangCategory` of unrestricted-CP fibers (`cpmModule`), which restores binary fiber sums and joint action at every dimension and cannot host the nonsummable Bool pair; the Gate~8 suite is `ambientCP_gate8_testSuite`, with terminal theorem `day_bang_l8_resolved_by_ambientCP_replacement`. `BangSplitEffectAdmissible` is the global universal Route~A bound, not a hereditary carrier-membership predicate; it fails at  $A = 2$  by excluding the degree-one identity series. Scaling by  $\frac{1}{2}$  repairs the  $(A, k) = (2, 1)$  joint-effect matrix bound to  $I$ , but left/right counit force the  $(0, 1)$  and  $(1, 0)$  boundary weights to remain 1, so uniform half-scaling is not a counital repair. The coefficientwise tensor-square object is still not the genuine Day tensor of two series modules. General Day closure for based modules, an all-dimensional TNI cofree exponential, a bang rebuilt in the ambient-CP replacement, the based double-dual classical subcategory, and the LNL package remain objectives. Consequently unrestricted arrows are not yet interpreted for  $A \geq 2$ . The intended adequacy boundary is closed terms with first-order observable result: denotation should equal the supremum of finite-step subnormalized operational instruments. Adequacy at arbitrary higher-order result types and full abstraction are not claimed.

## 5.1 Target compositional semantics

For clarity, we state the complete Scott–Strachey-style definition that the remaining formalization must realize. This subsection is a specification, not a list of completed theorems. In the intended linear category  $\mathcal{L}$ , with tensor unit  $I$ , additives, internal hom  $\multimap$ , and exponential  $!$ , type objects are

$$\begin{aligned} \llbracket 1 \rrbracket &= I, & \llbracket \text{Bit} \rrbracket &= I \oplus I, & \llbracket \text{Qubit} \rrbracket &= y(2), \\ \llbracket A \otimes B \rrbracket &= \llbracket A \rrbracket \otimes \llbracket B \rrbracket, & \llbracket A \multimap B \rrbracket &= \llbracket A \rrbracket \multimap \llbracket B \rrbracket, & \llbracket A \rightarrow B \rrbracket &= !\llbracket A \rrbracket \multimap \llbracket B \rrbracket. \end{aligned}$$

For a strictly positive body  $A(\alpha)$ ,  $\llbracket \mu\alpha.A \rrbracket$  is the embedding–projection colimit of

$$0 \longrightarrow \llbracket A \rrbracket(0) \longrightarrow \llbracket A \rrbracket^2(0) \longrightarrow \cdots,$$



with inverse continuous maps  $\text{fold}_A : \llbracket A[\mu\alpha.A/\alpha] \rrbracket \rightleftharpoons \llbracket \mu\alpha.A \rrbracket : \text{unfold}_A$ . The context object is

$$C_{\Gamma;\Delta} = F\left(\prod_{A \in \Gamma} G\llbracket A \rrbracket\right) \otimes \bigotimes_{A \in \Delta} \llbracket A \rrbracket,$$

where an empty linear cell contributes  $I$ . A typing derivation denotes  $\llbracket \Gamma; \Delta \vdash M : A \rrbracket : C_{\Gamma;\Delta} \rightarrow \llbracket A \rrbracket$ .

Let  $\text{split}_s$  be the structural map induced by a verified linear context split  $s$ , let  $\text{lookup}^\omega$  and  $\text{lookup}^1$  be unrestricted and linear projections, and let  $\text{discard}$  be the structural map available exactly for an all-empty linear context. Writing  $\text{ev}_\kappa$ ,  $\text{curry}_\kappa$ ,  $\text{tensorElim}$ , and  $\text{bitElim}(f, g)$  for the corresponding model-derived maps, the term clauses are required to be:

$$\begin{aligned} \llbracket x_n^\omega \rrbracket &= \text{lookup}_n^\omega, \\ \llbracket x_n^1 \rrbracket &= \text{lookup}_n^1, \\ \llbracket \lambda^\kappa(A).M \rrbracket &= \text{curry}_\kappa(\llbracket M \rrbracket), \\ \llbracket M N \rrbracket &= \text{ev}_\kappa \circ (\llbracket M \rrbracket \otimes \llbracket N \rrbracket) \circ \text{split}_s, \\ \llbracket \langle \rangle \rrbracket &= \text{unit} \circ \text{discard}, \\ \llbracket \text{bit}(b) \rrbracket &= \text{bit}_b \circ \text{discard}, \\ \llbracket \langle M, N \rangle \rrbracket &= (\llbracket M \rrbracket \otimes \llbracket N \rrbracket) \circ \text{split}_s, \\ \llbracket \text{unpair } M \ K \rrbracket &= \text{tensorElim} \circ (\llbracket M \rrbracket \otimes \llbracket K \rrbracket) \circ \text{split}_s, \\ \llbracket \text{if } B \ M \ N \rrbracket &= \text{bitElim}(\llbracket M \rrbracket, \llbracket N \rrbracket) \circ (\llbracket B \rrbracket \otimes \text{id}) \circ \text{split}_s, \\ \llbracket p \rrbracket &= \text{prim}_p \circ \text{discard}, \\ \llbracket \text{measure } M \ K \rrbracket &= \text{handleMeasure} \circ (\llbracket M \rrbracket \otimes \llbracket K \rrbracket) \circ \text{split}_s, \\ \llbracket \text{fix}_A \ M \rrbracket &= \bigsqcup_{n < \omega} \Phi_{\llbracket M \rrbracket}^n(\perp), \\ \llbracket \text{fold}_A \ M \rrbracket &= \text{fold}_A \circ \llbracket M \rrbracket, \\ \llbracket \text{unfold } M \rrbracket &= \text{unfold}_A \circ \llbracket M \rrbracket. \end{aligned}$$

Here  $\text{prim}_p$  must be the checked CP map for the complete primitive signature, and  $\text{handleMeasure}$  must use the two subnormalized maps  $\rho \mapsto P_b \rho P_b$  while promoting the known outcome bit and retaining the measured qubit. The implementation is complete only when these clauses are derived from the concrete model, independent of typing derivations, and validated by substitution, soundness, and adequacy.

## 5.2 Theorem dependence (Route A fragment)


$N$ -qubit staging interface package.

## 5.3 Blueprint declarations — Type-indexed denotation and the $N$ -qubit fragment

*Auto-generated from the Lean sources (648 declarations). Each card states the result in mathematical English and explains the idea of its proof or construction; the Lean source follows each card.*

### 5.3.1 The nonlinear object carrying an unrestricted context

**Definition.** The nonlinear object carrying an unrestricted context. A source type is viewed nonlinearly through  $G$ ; products account for contraction and weakening.

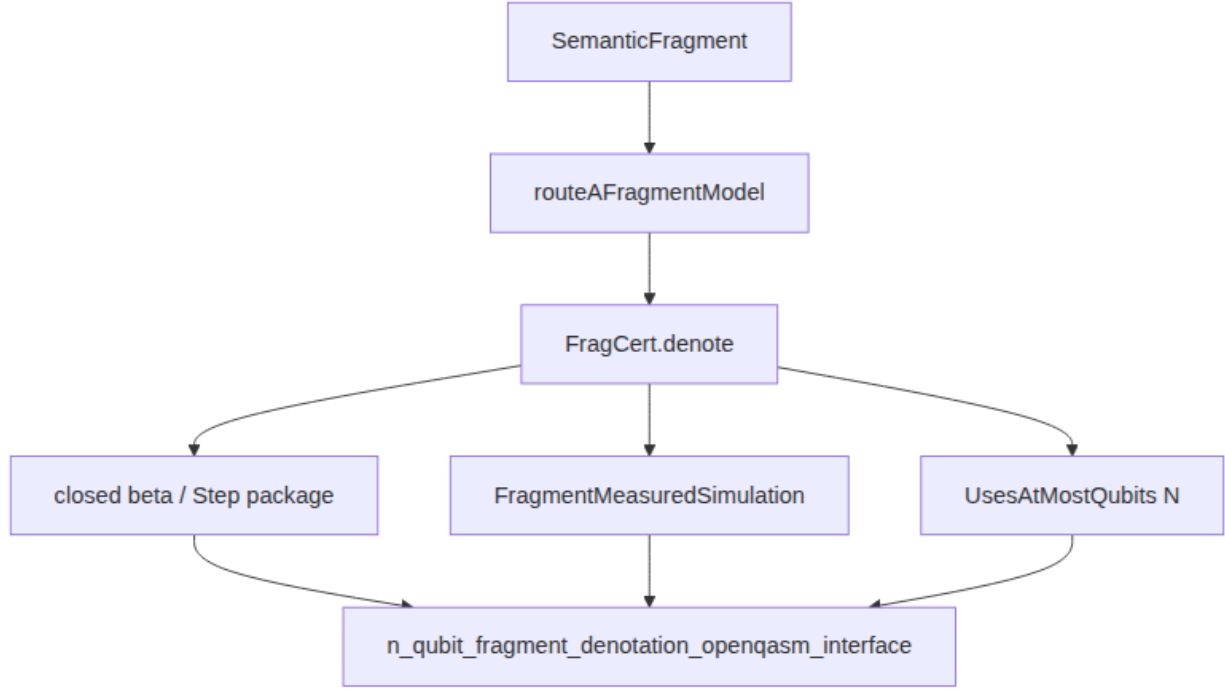

**Figure 8:** Section 5 checked-fragment theorem dependence culminating in the

**Construction.** Defined by cases on the input:  $[] \mapsto$  the terminal;  $A :: \Gamma \mapsto$  the product of the obj of  $\Gamma$  and the unrestricted of  $M, \Gamma$ .

**Lean 4 source** `QLambda/Linear/Denotation.lean`

```

def unrestricted (M : LNLModel.{u, v})
  (I : Ty -> M.linear.Obj) : List Ty -> M.nonlinear.Obj
| [] => M.nonlinearClosed.terminal
| A :: Gamma =>
  M.nonlinearClosed.product (M.G.obj (I A)) (unrestricted M I Gamma)

```

### 5.3.2 Linear contexts retain none cells as tensor units, so de Bruijn indices remain aligned across an ordered context split

**Definition.** Linear contexts retain `none` cells as tensor units, so de Bruijn indices remain aligned across an `OSplit`.


**Construction.** Defined by cases on the input:  $[] \mapsto$  the unit;  $\text{none} :: \Delta \mapsto$  the tensor product of the unit and the linear of  $M, \Gamma, \Delta$ ;  $\text{some } A :: \Delta \mapsto$  the tensor product of the  $i$  of  $A$  and the linear of  $M, \Gamma, \Delta$ .

**Lean 4 source** `QLambda/Linear/Denotation.lean`

```

def linear (M : LNLModel.{u, v})
  (I : Ty -> M.linear.Obj) : List (Option Ty) -> M.linear.Obj
| [] => M.linearClosed.unit
| none :: Delta =>
  M.linearClosed.tensor M.linearClosed.unit (linear M I Delta)

```

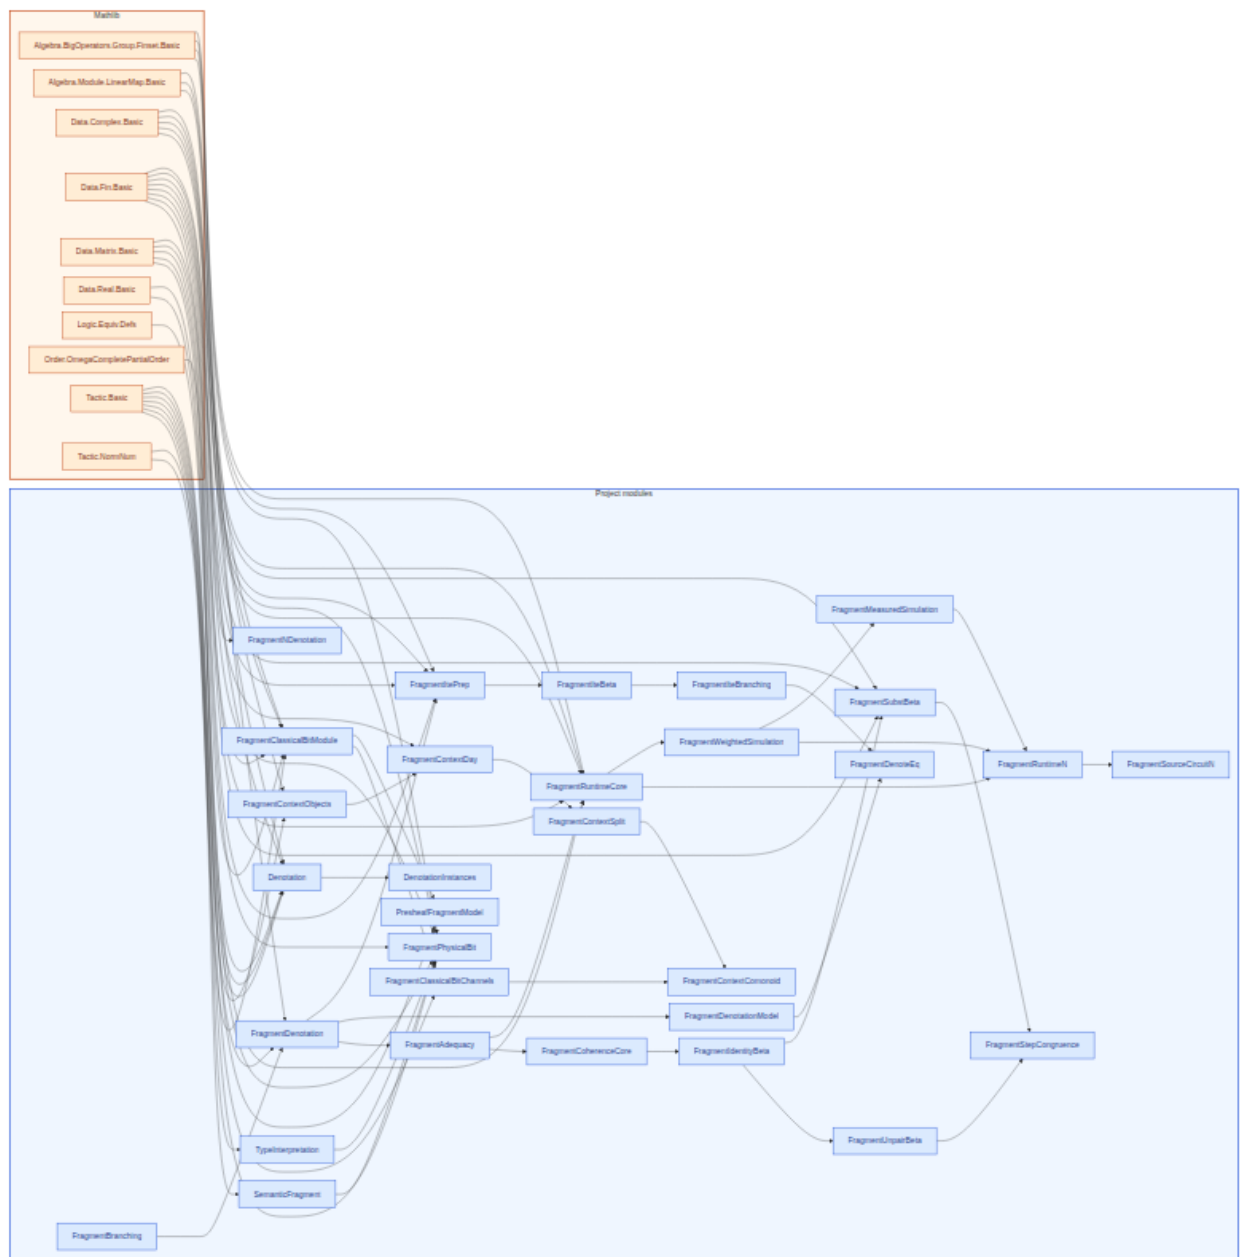

**Figure 9:** Lean module dependencies for §5 (fragment denotation). Amber box: Mathlib imports (10 listed). Blue box: project modules (31).

```
| some A :: Delta =>
  M.linearClosed.tensor (I A) (linear M I Delta)
```

### 5.3.3 Standard LNL context object $F[\Gamma] \otimes [\Delta]$

**Definition.** Standard LNL context object  $F[\Gamma] \otimes [\Delta]$ .

**Construction.** Defined to be the tensor product of the obj of unrestricted  $M \text{ I } \Gamma$  and the linear of  $M, I, \Delta$ .

#### Lean 4 source `QLambda/Linear/Denotation.lean`

```
def combined (M : LNLModel.{u, v}) (I : Ty -> M.linear.Obj)
  (Gamma : List Ty) (Delta : List (Option Ty)) : M.linear.Obj :=
  M.linearClosed.tensor (M.F.obj (unrestricted M I Gamma)) (linear M I Delta)
```

### 5.3.4 Categorical operations required to interpret all typing derivations

**Definition.** Categorical operations required to interpret all typing derivations. The operations are data, not axioms claiming that a concrete model exists. Their types expose every presently missing structural map. In particular, `prim` and `measure` cannot yet be derived from `CompletedCP`, because the foundations do not yet define their embedding into quantum-CPO homs.

**Construction.** An element consists of `ty`, `varU`, `varL`, `lamU`, `lamL`, `appL`, `appU` and `unit`.

#### Lean 4 source `QLambda/Linear/Denotation.lean`

```
structure DenotationModel (M : LNLModel.{u, v}) where
  ty : Ty -> M.linear.Obj
  varU :
    forall {Gamma Delta n A}, Lookup Gamma n A -> Ty.Duplicable A -> AllNone
    Delta ->
      M.linear.Hom (ContextObject.combined M ty Gamma Delta) (ty A)
  varL :
    forall {Gamma Delta n A}, Lookup Delta n (some A) -> OnlySomeAt Delta n ->
      M.linear.Hom (ContextObject.combined M ty Gamma Delta) (ty A)
  lamU :
    forall {Gamma Delta A B}, Ty.Admissible A -> Ty.Duplicable A -> AllNone Delta
    ->
      M.linear.Hom (ContextObject.combined M ty (A :: Gamma) Delta) (ty B) ->
      M.linear.Hom (ContextObject.combined M ty Gamma Delta)
        (ty (.arrow .unres A B))
  lamL :
    forall {Gamma Delta A B}, Ty.Admissible A ->
      M.linear.Hom (ContextObject.combined M ty Gamma (some A :: Delta)) (ty B) ->
      M.linear.Hom (ContextObject.combined M ty Gamma Delta) (ty (.arrow .lin A B))
  appL :
    forall {Gamma Delta Delta_1 Delta_2 A B}, OSplit Delta Delta_1 Delta_2 ->
      M.linear.Hom (ContextObject.combined M ty Gamma Delta_1)
        (ty (.arrow .lin A B)) ->
      M.linear.Hom (ContextObject.combined M ty Gamma Delta_2) (ty A) ->
      M.linear.Hom (ContextObject.combined M ty Gamma Delta) (ty B)
  appU :
```

```

forall1 {Gamma Delta DeltaF DeltaX A B}, OSplit Delta DeltaF DeltaX -> AllNone
DeltaX ->
  M.linear.Hom (ContextObject.combined M ty Gamma DeltaF)
    (ty (.arrow .unres A B)) ->
  M.linear.Hom (ContextObject.combined M ty Gamma DeltaX) (ty A) ->
  M.linear.Hom (ContextObject.combined M ty Gamma Delta) (ty B)
unit :
  forall {Gamma Delta}, AllNone Delta ->
    M.linear.Hom (ContextObject.combined M ty Gamma Delta) (ty .unit)
bitLit :
  forall {Gamma Delta}, Bool -> AllNone Delta ->
    M.linear.Hom (ContextObject.combined M ty Gamma Delta) (ty .bit)
pair :
  forall {Gamma Delta Delta_1 Delta_2 A B}, OSplit Delta Delta_1 Delta_2 ->
    M.linear.Hom (ContextObject.combined M ty Gamma Delta_1) (ty A) ->
    M.linear.Hom (ContextObject.combined M ty Gamma Delta_2) (ty B) ->
    M.linear.Hom (ContextObject.combined M ty Gamma Delta) (ty (.tensor A B))
unpair :
  forall {Gamma Delta Delta_1 Delta_2 A B C}, OSplit Delta Delta_1 Delta_2 ->
    M.linear.Hom (ContextObject.combined M ty Gamma Delta_1) (ty (.tensor A B)) ->
    M.linear.Hom (ContextObject.combined M ty Gamma Delta_2)
      (ty (.arrow .lin A (.arrow .lin B C))) ->
    M.linear.Hom (ContextObject.combined M ty Gamma Delta) (ty C)
ite :
  forall {Gamma Delta Delta_1 Delta_2 A}, OSplit Delta Delta_1 Delta_2 ->
    M.linear.Hom (ContextObject.combined M ty Gamma Delta_1) (ty .bit) ->
    M.linear.Hom (ContextObject.combined M ty Gamma Delta_2) (ty A) ->
    M.linear.Hom (ContextObject.combined M ty Gamma Delta_2) (ty A) ->
    M.linear.Hom (ContextObject.combined M ty Gamma Delta) (ty A)
prim :
  forall {Gamma Delta}, (p : Prim) -> AllNone Delta ->
    M.linear.Hom (ContextObject.combined M ty Gamma Delta) (ty (primTy p))
measure :
  forall {Gamma Delta Delta_1 Delta_2 A}, OSplit Delta Delta_1 Delta_2 ->
    M.linear.Hom (ContextObject.combined M ty Gamma Delta_1) (ty .qubit) ->
    M.linear.Hom (ContextObject.combined M ty Gamma Delta_2)
      (ty (.arrow .unres .bit (.arrow .lin .qubit A))) ->
    M.linear.Hom (ContextObject.combined M ty Gamma Delta) (ty A)
fix :
  forall {Gamma Delta A}, Ty.Admissible A -> Ty.Duplicable A -> AllNone Delta
  ->
    M.linear.Hom (ContextObject.combined M ty Gamma Delta)
      (ty (.arrow .unres A A)) ->
    M.linear.Hom (ContextObject.combined M ty Gamma Delta) (ty A)
fold :
  forall {Gamma Delta A}, Ty.Admissible (.mu A) ->
    M.linear.Hom (ContextObject.combined M ty Gamma Delta)
      (ty (Ty.subst 0 (.mu A) A)) ->
    M.linear.Hom (ContextObject.combined M ty Gamma Delta) (ty (.mu A))
unfold :
  forall {Gamma Delta A}, Ty.Admissible (.mu A) ->
    M.linear.Hom (ContextObject.combined M ty Gamma Delta) (ty (.mu A)) ->
    M.linear.Hom (ContextObject.combined M ty Gamma Delta)
      (ty (Ty.subst 0 (.mu A) A))
interpret :
  forall {Gamma Delta t A}, HasType Gamma Delta t A ->

```

```

    M.linear.Hom (ContextObject.combined M ty Gamma Delta) (ty A)
interpret_varU :
  forall {Gamma Delta n A} (h : Lookup Gamma n A)
    (hdup : Ty.Duplicable A) (hnone : AllNone Delta),
    interpret (HasType.varU h hdup hnone) = varU h hdup hnone
interpret_varL :
  forall {Gamma Delta n A} (h : Lookup Delta n (some A)) (honly : OnlySomeAt Delta
n),
    interpret (HasType.varL (Gamma := Gamma) h honly) = varL (Gamma := Gamma) h
honly
interpret_lamU :
  forall {Gamma Delta A B t} (hadm : Ty.Admissible A)
    (hdup : Ty.Duplicable A) (hnone : AllNone Delta)
    (h : HasType (A :: Gamma) Delta t B),
    interpret (HasType.lamU hadm hdup hnone h) =
      lamU hadm hdup hnone (interpret h)
interpret_lamL :
  forall {Gamma Delta A B t} (hadm : Ty.Admissible A)
    (h : HasType Gamma (some A :: Delta) t B),
    interpret (HasType.lamL hadm h) = lamL hadm (interpret h)
interpret_appL :
  forall {Gamma Delta Delta_1 Delta_2 A B F X} (hs : OSplit Delta Delta_1 Delta_2)
    (hF : HasType Gamma Delta_1 F (.arrow .lin A B)) (hX : HasType Gamma Delta_2 X A
),
    interpret (HasType.appL hs hF hX) =
      appL hs (interpret hF) (interpret hX)
interpret_appU :
  forall {Gamma Delta DeltaF DeltaX A B F X} (hs : OSplit Delta DeltaF DeltaX)
    (hnone : AllNone DeltaX)
    (hF : HasType Gamma DeltaF F (.arrow .unres A B)) (hX : HasType Gamma DeltaX X A
),
    interpret (HasType.appU hs hnone hF hX) =
      appU hs hnone (interpret hF) (interpret hX)
interpret_unit :
  forall {Gamma Delta} (hnone : AllNone Delta),
    interpret (HasType.unit (Gamma := Gamma) hnone) = unit (Gamma := Gamma) hnone
interpret_bitLit :
  forall {Gamma Delta b} (hnone : AllNone Delta),
    interpret (HasType.bitLit (Gamma := Gamma) (b := b) hnone) =
      bitLit (Gamma := Gamma) b hnone
interpret_pair :
  forall {Gamma Delta Delta_1 Delta_2 A B t s} (hs : OSplit Delta Delta_1 Delta_2)
    (ht : HasType Gamma Delta_1 t A) (hs' : HasType Gamma Delta_2 s B),
    interpret (HasType.pair hs ht hs') =
      pair hs (interpret ht) (interpret hs')
interpret_unpair :
  forall {Gamma Delta Delta_1 Delta_2 A B C t k} (hs : OSplit Delta Delta_1 Delta_2
)
    (ht : HasType Gamma Delta_1 t (.tensor A B))
    (hk : HasType Gamma Delta_2 k (.arrow .lin A (.arrow .lin B C))),
    interpret (HasType.unpair hs ht hk) =
      unpair hs (interpret ht) (interpret hk)
interpret_ite :
  forall {Gamma Delta Delta_1 Delta_2 A b t e} (hs : OSplit Delta Delta_1 Delta_2)
    (hb : HasType Gamma Delta_1 b .bit) (ht : HasType Gamma Delta_2 t A)
    (he : HasType Gamma Delta_2 e A),

```

```

interpret (HasType.ite hs hb ht he) =
  ite hs (interpret hb) (interpret ht) (interpret he)
interpret_prim :
  forall {Gamma Delta p} (hnone : AllNone Delta),
    interpret (HasType.prim (p := p) (Gamma := Gamma) hnone) =
      prim (Gamma := Gamma) p hnone
interpret_measure :
  forall {Gamma Delta Delta_1 Delta_2 A q k} (hs : OSplit Delta Delta_1 Delta_2)
    (hq : HasType Gamma Delta_1 q .qubit)
    (hk : HasType Gamma Delta_2 k
      (.arrow .unres .bit (.arrow .lin .qubit A))),
    interpret (HasType.measure hs hq hk) =
      measure hs (interpret hq) (interpret hk)
interpret_fix :
  forall {Gamma Delta A t} (hadm : Ty.Admissible A)
    (hdup : Ty.Duplicable A) (hnone : AllNone Delta)
    (ht : HasType Gamma Delta t (.arrow .unres A A)),
    interpret (HasType.fix hadm hdup hnone ht) =
      fix hadm hdup hnone (interpret ht)
interpret_fold :
  forall {Gamma Delta A t} (hadm : Ty.Admissible (.mu A))
    (ht : HasType Gamma Delta t (Ty.subst 0 (.mu A) A)),
    interpret (HasType.fold hadm ht) = fold hadm (interpret ht)
interpret_unfold :
  forall {Gamma Delta A t} (hadm : Ty.Admissible (.mu A))
    (ht : HasType Gamma Delta t (.mu A)),
    interpret (HasType.unfold hadm ht) = unfold hadm (interpret ht)

```

### 5.3.5 Type-indexed compositional interpretation of a typing derivation

**Definition.** Type-indexed compositional interpretation of a typing derivation. `HasType` lives in `Prop`, so Lean cannot eliminate it into hom data. The interpretation and all constructor equations are explicit fields of `DenotationModel`, rather than an illicit large elimination.

**Construction.** Defined to be the interpretation of `h`.

#### Lean 4 source `QLambda/Linear/Denotation.lean`

```

def denote {M : LNLModel.{u, v}} (S : DenotationModel M)
  {Gamma Delta t A} (h : HasType Gamma Delta t A) :
  M.linear.Hom (ContextObject.combined M S.ty Gamma Delta) (S.ty A) :=
  S.interpret h

```

### 5.3.6 Denotation of the unrestricted variable for typing derivations

**Statement.** If position `n` of  $\Gamma$  holds `A`; `Ty.Duplicable A`; and  $\Delta$  is an empty usage mask, then the denotation of the unrestricted variable of `h`, `hdup`, `hnone` equals the unrestricted variable of `h`, `hdup`, `hnone`.

**Proof.** The proof term combines the facts named in it directly.

#### Lean 4 source `QLambda/Linear/Denotation.lean`

```

@[simp] theorem denote_varU {M : LNLModel.{u, v}} (S : DenotationModel M)
  {Gamma Delta n A} (h : Lookup Gamma n A) (hdup : Ty.Duplicable A)
  (hnone : AllNone Delta) :
  denote S (HasType.varU h hdup hnone) = S.varU h hdup hnone :=
  S.interpret_varU h hdup hnone

```

### 5.3.7 Denotation of the linear application for typing derivations

**Statement.** If  $\Delta$  splits into the left part  $\Delta_1$  and the right part  $\Delta_2$ ;  $F$  has type  $\text{.arrow .lin } A \ B$  under the unrestricted context  $\Gamma$  and the linear context  $\Delta_1$ ; and  $X$  has type  $A$  under the unrestricted context  $\Gamma$  and the linear context  $\Delta_2$ , then the denotation of the linear application of  $hs$ ,  $hF$ ,  $hX$  equals the linear application of  $hs$ , the denotation of  $hF$ , the denotation of  $hX$ .

**Proof.** The proof term combines the facts named in it directly.

#### Lean 4 source `QLambda/Linear/Denotation.lean`

```

@[simp] theorem denote_appL {M : LNLModel.{u, v}} (S : DenotationModel M)
  {Gamma Delta Delta_1 Delta_2 A B F X} (hs : OSplit Delta Delta_1 Delta_2)
  (hF : HasType Gamma Delta_1 F (.arrow .lin A B))
  (hX : HasType Gamma Delta_2 X A) :
  denote S (HasType.appL hs hF hX) =
    S.appL hs (denote S hF) (denote S hX) :=
  S.interpret_appL hs hF hX

```

### 5.3.8 Denotation of the measurement for typing derivations

**Statement.** If  $\Delta$  splits into the left part  $\Delta_1$  and the right part  $\Delta_2$ ;  $Q$  has type  $\text{.qubit}$  under the unrestricted context  $\Gamma$  and the linear context  $\Delta_1$ ; and  $K$  has type  $\text{.arrow .unres .bit (.arrow .lin .qubit } A \text{)}$  under the unrestricted context  $\Gamma$  and the linear context  $\Delta_2$ , then the denotation of the measurement of wire  $hK$  equals the measurement of wire the denotation of  $hK$ .

**Proof.** The proof term combines the facts named in it directly.

#### Lean 4 source `QLambda/Linear/Denotation.lean`

```

@[simp] theorem denote_measure {M : LNLModel.{u, v}} (S : DenotationModel M)
  {Gamma Delta Delta_1 Delta_2 A Q K} (hs : OSplit Delta Delta_1 Delta_2)
  (hQ : HasType Gamma Delta_1 Q .qubit)
  (hK : HasType Gamma Delta_2 K
    (.arrow .unres .bit (.arrow .lin .qubit A))) :
  denote S (HasType.measure hs hQ hK) =
    S.measure hs (denote S hQ) (denote S hK) :=
  S.interpret_measure hs hQ hK

```

### 5.3.9 Number of quantum input wires used by a primitive in its first-order CP meaning

**Definition.** Number of quantum input wires used by a primitive in its first-order CP meaning.

**Construction.** Defined by cases on the input:  $\text{.new0} \mapsto 0$ ;  $\text{.x} \mid \text{.h} \mid \text{.t} \mid \text{.ry} \mid \text{.reset} \mapsto 1$ ;  $\text{.cx} \mapsto 2$ .

#### Lean 4 source `QLambda/Linear/Denotation.lean`



```

def inputQ : Prim -> Nat
| .new0 => 0
| .x | .h | .t | .ry _ | .reset => 1
| .cx => 2

```

### 5.3.10 Number of quantum output wires produced by a primitive

**Definition.** Number of quantum output wires produced by a primitive.

**Construction.** Defined by cases on the input:  $\text{.new0} \mapsto 1$ ;  $\text{.x} \mid \text{.h} \mid \text{.t} \mid \text{.ry } \_ \mid \text{.reset} \mapsto 1$ ;  $\text{.cx} \mapsto 2$ .

**Lean 4 source** [QLambda/Linear/Denotation.lean](#)

```

def outputQ : Prim -> Nat
| .new0 => 1
| .x | .h | .t | .ry _ | .reset => 1
| .cx => 2

```

### 5.3.11 The isometry $|0\rangle : \mathbb{C} \rightarrow \mathbb{C}^2$ used by allocation

**Definition.** The isometry  $|0\rangle : \mathbb{C} \rightarrow \mathbb{C}^2$  used by allocation.

**Construction.** The map sending  $i$  to if  $i = 0$  then 1 else 0.

**Lean 4 source** [QLambda/Linear/Denotation.lean](#)

```

def ketZero : KrausOperator (CQ.QDim 0) (CQ.QDim 1) :=
  fun i _ => if i = 0 then 1 else 0

```

### 5.3.12 Concrete finite Kraus presentation of every physical primitive

**Definition.** Concrete finite Kraus presentation of every physical primitive.

**Construction.** Defined by cases on the input:  $\text{.new0} \mapsto [\text{ketZero}]$ ;  $\text{.x} \mapsto [\text{xMatrix } 0]$ ;  $\text{.h} \mapsto [\text{hMatrix } 0]$ ;  $\text{.t} \mapsto [\text{tMatrix } 0]$ ;  $\text{.ry } \theta \mapsto [\text{ryMatrix } \theta \ 0]$ ;  $\text{.cx} \mapsto [\text{cxMatrix } 0 \ 1]$ ;  $\text{.reset} \mapsto (\text{reset } 0).\text{kraus}$ .

**Lean 4 source** [QLambda/Linear/Denotation.lean](#)

```

noncomputable def kraus (p : Prim) :
  KrausFamily (CQ.QDim p.inputQ) (CQ.QDim p.outputQ) :=
  match p with
| .new0 => [ketZero]
| .x => [Composer.xMatrix (0 : Fin 1)]
| .h => [Composer.hMatrix (0 : Fin 1)]
| .t => [Composer.tMatrix (0 : Fin 1)]
| .ry ? => [Composer.ryMatrix (? : ?) (0 : Fin 1)]
| .cx => [Composer.cxMatrix (0 : Fin 2) (1 : Fin 2)]
| .reset => (Composer.reset (0 : Fin 1)).kraus

```

### 5.3.13 Presentation-independent completed CP meaning of a primitive

**Definition.** Presentation-independent completed CP meaning of a primitive.

**Construction.** Defined to be the CP map with Kraus family the Kraus operators of  $p$ .

**Lean 4 source** [QLambda/Linear/Denotation.lean](#)

```
noncomputable def completedCP (p : Prim) :  
  CompletedCP (CQ.QDim p.inputQ) (CQ.QDim p.outputQ) :=  
  CompletedCP.ofKraus p.kraus
```

### 5.3.14 Completed CP class of the Pauli-X gate

**Statement.** The completed CP class of the Pauli-X gate equals the CP map with Kraus family `[xMatrix 0]`.

**Proof.** By definition. Unfolding the completed CP class turns the left-hand side, the completed CP class of the Pauli-X gate, into the right-hand side, the CP map with Kraus family `[xMatrix 0]`; the two sides are the same term.

**Lean 4 source** [QLambda/Linear/Denotation.lean](#)

```
@[simp] theorem completedCP_x :  
  completedCP .x =  
    CompletedCP.ofKraus [Composer.xMatrix (0 : Fin 1)] :=  
  rfl
```

### 5.3.15 Completed CP class of the Hadamard gate

**Statement.** The completed CP class of the Hadamard gate equals the CP map with Kraus family `[hMatrix 0]`.

**Proof.** By definition. Unfolding the completed CP class turns the left-hand side, the completed CP class of the Hadamard gate, into the right-hand side, the CP map with Kraus family `[hMatrix 0]`; the two sides are the same term.

**Lean 4 source** [QLambda/Linear/Denotation.lean](#)

```
@[simp] theorem completedCP_h :  
  completedCP .h =  
    CompletedCP.ofKraus [Composer.hMatrix (0 : Fin 1)] :=  
  rfl
```

### 5.3.16 Completed CP class of the T gate

**Statement.** The completed CP class of the T gate equals the CP map with Kraus family `[tMatrix 0]`.

**Proof.** By definition. Unfolding the completed CP class turns the left-hand side, the completed CP class of the T gate, into the right-hand side, the CP map with Kraus family `[tMatrix 0]`; the two sides are the same term.

**Lean 4 source** [QLambda/Linear/Denotation.lean](#)

```
@[simp] theorem completedCP_t :
  completedCP .t =
    CompletedCP.ofKraus [Composer.tMatrix (0 : Fin 1)] :=
  rfl
```

### 5.3.17 Completed CP class of a Y-rotation

**Statement.** For a rational number  $\theta$ : the completed CP class of the Y-rotation gate of  $\theta$  equals the CP map with Kraus family `[ryMatrix  $\theta$  0]`.

**Proof.** By definition. Unfolding the completed CP class turns the left-hand side, the completed CP class of the Y-rotation gate of  $\theta$ , into the right-hand side, the CP map with Kraus family `[ryMatrix  $\theta$  0]`; the two sides are the same term.

**Lean 4 source** `QLambda/Linear/Denotation.lean`

```
@[simp] theorem completedCP_ry (? : ?) :
  completedCP (.ry ?) =
    CompletedCP.ofKraus [Composer.ryMatrix (? : ?) (0 : Fin 1)] :=
  rfl
```

### 5.3.18 Completed CP class of the controlled-NOT gate

**Statement.** The completed CP class of the controlled-NOT gate equals the CP map with Kraus family `[cxMatrix 0 1]`.

**Proof.** By definition. Unfolding the completed CP class turns the left-hand side, the completed CP class of the controlled-NOT gate, into the right-hand side, the CP map with Kraus family `[cxMatrix 0 1]`; the two sides are the same term.

**Lean 4 source** `QLambda/Linear/Denotation.lean`

```
@[simp] theorem completedCP_cx :
  completedCP .cx =
    CompletedCP.ofKraus
      [Composer.cxMatrix (0 : Fin 2) (1 : Fin 2)] :=
  rfl
```

### 5.3.19 Completed CP class of reset

**Statement.** The completed CP class of reset equals the reset of wire 0.

**Proof.** By definition. Unfolding the completed CP class turns the left-hand side, the completed CP class of reset, into the right-hand side, the reset of wire 0; the two sides are the same term.

**Lean 4 source** `QLambda/Linear/Denotation.lean`

```
@[simp] theorem completedCP_reset :
  completedCP .reset =
    CompletedCP.reset (0 : Fin 1) :=
  rfl
```

### 5.3.20 Concrete computational-basis qubit measurement as a two-branch completed CP instrument

**Definition.** Concrete computational-basis qubit measurement as a two-branch completed CP instrument.

**Construction.** Defined to be the measurement of wire 0.

**Lean 4 source** [QLambda/Linear/Denotation.lean](#)

```
noncomputable def qubitMeasurement :  
  CompletedCP.Instrument (CQ.QDim 1) (CQ.QDim 1) 2 :=  
  CompletedCP.measure (0 : Fin 1)
```

### 5.3.21 Qubit measurement of zero

**Statement.** The branch at 0 equals the CP map with Kraus family [projector 0 false].

**Proof.** By definition: the left-hand side, the branch at 0, and the right-hand side, the CP map with Kraus family [projector 0 false], unfold to the same term.

**Lean 4 source** [QLambda/Linear/Denotation.lean](#)

```
@[simp] theorem qubitMeasurement_zero :  
  qubitMeasurement.branch 0 =  
    CompletedCP.ofKraus [Composer.projector (0 : Fin 1) false] := by  
  rfl
```

### 5.3.22 Qubit measurement of one

**Statement.** The branch at 1 equals the CP map with Kraus family [projector 0 true].

**Proof.** By definition: the left-hand side, the branch at 1, and the right-hand side, the CP map with Kraus family [projector 0 true], unfold to the same term.

**Lean 4 source** [QLambda/Linear/Denotation.lean](#)

```
@[simp] theorem qubitMeasurement_one :  
  qubitMeasurement.branch 1 =  
    CompletedCP.ofKraus [Composer.projector (0 : Fin 1) true] := by  
  rfl
```

### 5.3.23 Symmetric-transitive closure of the deterministic classical source step

**Definition.** Symmetric-transitive closure of the deterministic classical source step. This is an operational quotient, not a substitute for the missing concrete LNL model.

**Construction.** Generated by the rules `refl`, `step`, `symm` and `trans`. Every element arises from finitely many applications of these rules, so properties are proved by induction over them.

**Lean 4 source** [QLambda/Linear/Denotation.lean](#)

```
inductive OperationalEq : Term -> Term -> Prop where  
  | refl (M) : OperationalEq M M  
  | step {M N} : Step M N -> OperationalEq M N  
  | symm {M N} : OperationalEq M N -> OperationalEq N M  
  | trans {M N P} : OperationalEq M N -> OperationalEq N P -> OperationalEq M P
```

### 5.3.24 Exact source meaning modulo deterministic classical computation

**Definition.** Exact source meaning modulo deterministic classical computation.

**Construction.** Defined to be the quotient of the operational equivalence.

**Lean 4 source** `QLambda/Linear/DenotationInstances.lean`

```
abbrev OperationalMeaning := Quotient operationalSetoid
```

### 5.3.25 Definition of the operational meaning

**Definition.** The operational meaning of  $M$  is an element of `OperationalMeaning`.

**Construction.** Defined to be the construction (variant) of  $M$ .

**Lean 4 source** `QLambda/Linear/DenotationInstances.lean`

```
def operationalDenote (M : Term) : OperationalMeaning :=  
  Quotient.mk' M
```

### 5.3.26 Soundness of the one-step reduction

**Statement.** For terms  $M, N$ : if  $M$  reduces in one step to  $N$ , then the operational meaning of  $M$  equals the operational meaning of  $N$ .

**Proof.** This is an instance of standard identities for quotients.

**Lean 4 source** `QLambda/Linear/DenotationInstances.lean`

```
theorem step_sound {M N : Term} (h : Step M N) :  
  operationalDenote M = operationalDenote N :=  
  Quotient.sound (OperationalEq.step h)
```

### 5.3.27 Exactness of the linear $\beta$ -reduction

**Statement.** If `Term.Value V`, then the operational meaning of the application of `.lam .lin A M` and  $V$  equals the operational meaning of the linear substitution of  $V$  and  $M$  at 0.

**Proof.** This is an instance of the soundness of the one-step reduction.

**Lean 4 source** `QLambda/Linear/DenotationInstances.lean`

```
theorem betaL_exact {A M V} (hV : Term.Value V) :  
  operationalDenote (.app (.lam .lin A M) V) =  
  operationalDenote (Term.substLin 0 V M) :=  
  step_sound (.betaL hV)
```

### 5.3.28 Exactness of the unrestricted $\beta$ -reduction

**Statement.** If `Term.Value V`, then the operational meaning of the application of `.lam .unres A M` and `V` equals the operational meaning of the unrestricted substitution of `V` and `M` at `0`.

**Proof.** This is an instance of the soundness of the one-step reduction.

**Lean 4 source** [QLambda/Linear/DenotationInstances.lean](#)

```
theorem betaU_exact {A M V} (hV : Term.Value V) :
  operationalDenote (.app (.lam .unres A M) V) =
    operationalDenote (Term.substUnres 0 V M) :=
  step_sound (.betaU hV)
```

### 5.3.29 Exactness of the pair elimination

**Statement.** If `Term.Value M` and `Term.Value N`, then the operational meaning of the pair elimination of `.pair M N` and `K` equals the operational meaning of the application of `.app K M` and `N`.

**Proof.** This is an instance of the soundness of the one-step reduction.

**Lean 4 source** [QLambda/Linear/DenotationInstances.lean](#)

```
theorem unpair_exact {M N K} (hM : Term.Value M) (hN : Term.Value N) :
  operationalDenote (.unpair (.pair M N) K) =
    operationalDenote (.app (.app K M) N) :=
  step_sound (.unpairBeta hM hN)
```

### 5.3.30 Exactness of the unfolding of the fold

**Statement.** If `Term.Value V`, then the operational meaning of the unfolding of `.fold A V` equals the operational meaning of `V`.

**Proof.** This is an instance of the soundness of the one-step reduction.

**Lean 4 source** [QLambda/Linear/DenotationInstances.lean](#)

```
theorem unfold_fold_exact {A V} (hV : Term.Value V) :
  operationalDenote (.unfold (.fold A V)) = operationalDenote V :=
  step_sound (.unfoldBeta hV)
```

### 5.3.31 Exactness of the least fixed point

**Statement.** If `Term.Value V`, then the operational meaning of the least fixed point of `A` and `V` equals the operational meaning of the application of `V` and `.fix A V`.

**Proof.** This is an instance of the soundness of the one-step reduction.

**Lean 4 source** [QLambda/Linear/DenotationInstances.lean](#)

```
theorem fix_exact {A V} (hV : Term.Value V) :
  operationalDenote (.fix A V) =
    operationalDenote (.app V (.fix A V)) :=
  step_sound (.fixBeta hV)
```

### 5.3.32 Exactness of the operational quotient

**Statement.** For terms  $M, N$ : the operational meaning of  $M$  equals  $\text{operationalDenote } N \leftrightarrow \text{OperationalEq } M \ N$ .

**Proof.** This is an instance of standard identities for quotients.

**Lean 4 source** [QLambda/Linear/DenotationInstances.lean](#)

```
theorem operational_quotient_exact {M N : Term} :  
  operationalDenote M = operationalDenote N <-> OperationalEq M N :=  
  Quotient.eq_iff_equiv
```

### 5.3.33 Closed unit observation: denotation is the Route A unit introduction

**Statement.** Closed unit observation: denotation is the Route A unit introduction. Formally:  $\text{FragCert}.\text{denoteUnit } \text{FragCert}.\text{closed\_unit\_cert} = \text{routeAFragmentModel}.\text{unitIntro}$ .

**Proof.** This is an instance of the formula for the denotation unit.

**Lean 4 source** [QLambda/Linear/FragmentAdequacy.lean](#)

```
theorem fragment_unit_adequacy :  
  FragCert.denoteUnit FragCert.closed_unit_cert =  
    routeAFragmentModel.unitIntro :=  
  FragCert.denoteUnit_eq _
```

### 5.3.34 Closed bit observation: denotation is the Route A bit literal

**Statement.** Closed bit observation: denotation is the Route A bit literal. Formally:  $\text{FragCert}.\text{denoteBitLit } (\text{FragCert}.\text{closed\_bitLit\_cert } b) = \text{routeAFragmentModel}.\text{bitLit } b$ .

**Proof.** This is an instance of the formula for the denotation bit lit.

**Lean 4 source** [QLambda/Linear/FragmentAdequacy.lean](#)

```
theorem fragment_bitLit_adequacy (b : Bool) :  
  FragCert.denoteBitLit (FragCert.closed_bitLit_cert b) =  
    routeAFragmentModel.bitLit b :=  
  FragCert.denoteBitLit_eq _
```

### 5.3.35 Fragment terms are preserved by classical unrestricted $\beta$ -reduction

**Statement.** Fragment terms are preserved by classical unrestricted  $\beta$ -reduction. Formally:  $\text{Term}.\text{SemanticFragment } (\text{Term}.\text{substUnres } 0 \ V \ M)$ .

**Proof.** This is an instance of the unrestricted substitution stays in the semantic fragment, applied to the hypothesis that  $V$  lies in the semantic fragment and the hypothesis that  $M$  lies in the semantic fragment.

**Lean 4 source** [QLambda/Linear/FragmentAdequacy.lean](#)

```
theorem fragment_betaU_preserves {M V : Term}  
  (hV : Term.SemanticFragment V) (hM : Term.SemanticFragment M) :  
  Term.SemanticFragment (Term.substUnres 0 V M) :=  
  Term.substUnres_semanticFragment hV hM
```

### 5.3.36 Fragment terms are preserved by classical linear $\beta$ -reduction

**Statement.** Fragment terms are preserved by classical linear  $\beta$ -reduction. Formally: `Term.SemanticFragment (Term.substLin 0 V M)`.

**Proof.** This is an instance of the linear substitution stays in the semantic fragment, applied to the hypothesis that  $V$  lies in the semantic fragment and the hypothesis that  $M$  lies in the semantic fragment.

#### Lean 4 source `QLambda/Linear/FragmentAdequacy.lean`

```
theorem fragment_betaL_preserves {M V : Term}
  (hV : Term.SemanticFragment V) (hM : Term.SemanticFragment M) :
  Term.SemanticFragment (Term.substLin 0 V M) :=
  Term.substLin_semanticFragment hV hM
```

### 5.3.37 Source one-step reduction preserves semantic fragment on fragment-admitted redexes

**Statement.** Source Step preserves `Term.SemanticFragment` on fragment-admitted redexes; `fix/fold/unfold` steps are excluded by the fragment. Formally: `Term.SemanticFragment N`.

**Proof.** By induction on the derivation that  $M$  reduces in one step to  $N$ . For a linear  $\beta$ -reduction, an unrestricted  $\beta$ -reduction, a true branch of a conditional, a false branch of a conditional and a pair elimination  $\beta$ -reduction, the claim is checked directly; for a component  $f$ , a component  $x$ , a conditional classical, a pair elimination classical, a pair linear, a pair  $r$  and a measurement classical, the claim follows from the induction hypothesis; the cases of an unfolding  $\beta$ -reduction, an unfolding classical, a least fixed point  $\beta$ -reduction, a least fixed point classical and a fold classical cannot occur, since it contradicts the hypothesis that  $M$  lies in the semantic fragment. It follows from the linear substitution stays in the semantic fragment and the unrestricted substitution stays in the semantic fragment.

#### Lean 4 source `QLambda/Linear/FragmentAdequacy.lean`

```
theorem fragment_step_preserves {M N : Term}
  (hM : Term.SemanticFragment M) (h : Step M N) :
  Term.SemanticFragment N := by
  induction h with
  | betaL hV =>
    cases hM with
    | app hF hX =>
      cases hF with
      | lam _ hBod => exact Term.substLin_semanticFragment hX hBod
  | betaU hV =>
    cases hM with
    | app hF hX =>
      cases hF with
      | lam _ hBod => exact Term.substUnres_semanticFragment hX hBod
  | appF hstep ih =>
    cases hM with
    | app hF hX => exact .app (ih hF) hX
  | appX hV hstep ih =>
    cases hM with
    | app hF hX => exact .app hF (ih hX)
  | iteTrue =>
    cases hM with
    | ite _ hT _ => exact hT
```



```

| iteFalse =>
  cases hM with
  | ite _ _ hE => exact hE
| iteC hstep ih =>
  cases hM with
  | ite hB hT hE => exact .ite (ih hB) hT hE
| unpairBeta hM' hN =>
  cases hM with
  | unpair hP hK =>
    cases hP with
    | pair hMl hNr => exact .app (.app hK hMl) hNr
| unpairC hstep ih =>
  cases hM with
  | unpair hM' hK => exact .unpair (ih hM') hK
| pairL hstep ih =>
  cases hM with
  | pair hM' hN => exact .pair (ih hM') hN
| pairR hV hstep ih =>
  cases hM with
  | pair hM' hN => exact .pair hM' (ih hN)
| measureC hstep ih =>
  cases hM with
  | measure hQ hK => exact .measure (ih hQ) hK
| unfoldBeta | unfoldC | fixBeta | fixC | foldC =>
  cases hM

```

### 5.3.38 Measurement branches stay in the fragment

**Statement.** Measurement branches stay in the fragment. Formally:  $\text{Term.SemanticFragment } N$ .

**Proof.** By case analysis on the derivation that  $\text{MeasStep } M \ b \ N$ . For a branch, the claim is checked directly.

**Lean 4 source** [QLambda/Linear/FragmentAdequacy.lean](#)

```

theorem fragment_measStep_preserves {M : Term} {b : Bool} {N : Term}
  (hM : Term.SemanticFragment M) (h : MeasStep M b N) :
  Term.SemanticFragment N := by
cases h with
| branch hQ =>
  cases hM with
  | measure hQ' hK =>
    exact .app (.app hK .bitLit) hQ'

```

### 5.3.39 Measurement branch maps agree with the Yoneda packaging

**Statement.** Measurement branch maps agree with the Yoneda packaging. Formally:  $\text{routeAFragment Model.measureBranch } b = \text{measureBranchYoneda } b$ .

**Proof.** By definition. Unfolding the measurement branch turns the left-hand side, the measurement branch of  $b$ , into the right-hand side, the measurement branch Yoneda of  $b$ ; the two sides are the same term.

**Lean 4 source** [QLambda/Linear/FragmentAdequacy.lean](#)

```

theorem fragment_measureBranch_agrees (b : Bool) :
  routeAFragmentModel.measureBranch b = measureBranchYoneda b :=
  rfl

```

### 5.3.40 Route A supplies a presheaf fragment matrix model together with closed unit and bit-literal observations

**Statement.** Route A supplies a `PresheafFragmentModel` together with closed unit and bit-literal observations. This is **not** compositional open-context denotation, runtime Born adequacy, or full-language completeness.

**Proof.** The witness is assembled directly from its components, using the route-A fragment model of the succeeded.

**Lean 4 source** [QLambda/Linear/FragmentAdequacy.lean](#)

```

theorem fragment_closed_literal_adequacy :
  RouteASucceeded /\
    (FragCert.denoteUnit FragCert.closed_unit_cert =
     routeAFragmentModel.unitIntro) /\
    (forall b, FragCert.denoteBitLit (FragCert.closed_bitLit_cert b) =
     routeAFragmentModel.bitLit b) :=
  <routeA_succeeded, fragment_unit_adequacy, fragment_bitLit_adequacy>

```

### 5.3.41 Deprecated alias retained for earlier citations; same statement as fragment closed term literal adequacy

**Statement.** Deprecated alias retained for earlier citations; same statement as `fragment_closed_literal_adequacy`.

**Proof.** This is an instance of the route A supplies a presheaf fragment matrix model together with closed unit and bit-literal observations.

**Lean 4 source** [QLambda/Linear/FragmentAdequacy.lean](#)

```

theorem fragment_program_complete :
  RouteASucceeded /\
    (FragCert.denoteUnit FragCert.closed_unit_cert =
     routeAFragmentModel.unitIntro) /\
    (forall b, FragCert.denoteBitLit (FragCert.closed_bitLit_cert b) =
     routeAFragmentModel.bitLit b) :=
  fragment_closed_literal_adequacy

```

### 5.3.42 The sole effect not supplied by symmetric monoidal closed structure: selection between two already-denoted branches

**Definition.** The sole effect not supplied by symmetric monoidal closed structure: selection between two already-denoted branches. Keeping this interface explicit prevents a zero/fallback map from masquerading as `ite` semantics.

**Construction.** An element consists of `iteElim`.

### Lean 4 source `QLambda/Linear/FragmentBranching.lean`

```
structure FragmentBranching where
  iteElim :
    forall {A : Ty}, Ty.SemanticFragment A ->
      Hom
        (dayTensor (fragmentModule .bit)
          (additiveProduct (fragmentModule A) (fragmentModule A)))
        (fragmentModule A)
```

#### 5.3.43 Swapping the two outputs of computational-basis copy changes nothing

**Definition.** Swapping the two outputs of computational-basis copy changes nothing.

**Construction.** Defined to be the composite of the tensor swap at 2, 2 after the bit copy superoperator.

### Lean 4 source `QLambda/Linear/FragmentClassicalBitChannels.lean`

```
noncomputable def bitCocommutativityLeft : Superoperator 2 4 :=
  Superoperator.comp (Superoperator.tensorSwap 2 2) bitCopySuperoperator
```

#### 5.3.44 The bit cocommutativity left equals a copy

**Statement.** The bit cocommutativity left equals the bit copy superoperator. Formally: `bitCocommutativityLeft = bitCopySuperoperator`.

**Proof.** By case analysis on `ai`. The key step rewrites with the Choi matrix of a composite of the map induced by an index equivalence for superoperators, in the left argument, the definition of the bit copy superoperator, the underlying completely positive map of the map induced by an isometry for superoperators and the Choi matrix of the map determined by a Kraus family.

### Lean 4 source `QLambda/Linear/FragmentClassicalBitChannels.lean`

```
theorem bitCocommutativityLeft_eq_copy :
  bitCocommutativityLeft = bitCopySuperoperator := by
  apply Superoperator.ext
  apply CPMMap.ext
  ext ai bj
  rcases ai with <a, i>
  rcases bj with <b, j>
  unfold bitCocommutativityLeft
  rw [show Superoperator.tensorSwap 2 2 =
    Superoperator.ofEquivalence (Superoperator.tensorSwapEquiv 2 2)
    from rfl]
  rw [Superoperator.choi_comp_ofEquivalence_left]
  fin_cases a <;> fin_cases i <;> fin_cases b <;> fin_cases j <;>
  norm_num [bitCopySuperoperator, Superoperator.cp_ofIsometry,
    CPMMap.choi_ofKraus, classicalCopyMatrix,
    KrausFamily.choiTerm, Matrix.conjTranspose_apply,
    Superoperator.tensorSwapEquiv, finProdFinEquiv,
    Fin.divNat, Fin.modNat]
```

### 5.3.45 Discard is insensitive to computational-basis dephasing

**Statement.** Discard is insensitive to computational-basis dephasing. Formally: `Superoperator.comp SigmaMon.ChoiSum.discardTwo bitDephaseSuperoperator = SigmaMon.ChoiSum.discardTwo`.

**Proof.** Both sides are compared pointwise (by extensionality). The goal is simplified using the underlying completely positive map of a composite for superoperators, the action on a matrix of a composition, the definition of the bit dephase superoperator and the action on a matrix of a sum of a mapped family.

**Lean 4 source** [QLambda/Linear/FragmentClassicalBitChannels.lean](#)

```
theorem bitDiscard_comp_dephase :
  Superoperator.comp SigmaMon.ChoiSum.discardTwo
    bitDephaseSuperoperator =
  SigmaMon.ChoiSum.discardTwo := by
  apply Superoperator.ext
  apply CPMat.ext_apply
  intro ?
  ext a b
  fin_cases a
  fin_cases b
  have h00 :
    ((Composer.splitWire (0 : Fin 1)) ((Composer.basisEquiv 1) 0)).1 =
      false := by decide
  have h01 :
    ((Composer.splitWire (0 : Fin 1)) ((Composer.basisEquiv 1) 1)).1 =
      true := by decide
  simp [Superoperator.cp_comp, CPMat.applyMat_comp,
    bitDephaseSuperoperator, CPMat.applyMat_add_map,
    Instrument.measure_branch_zero, Instrument.measure_branch_one,
    CPMat.applyMat_ofKraus, KrausFamily.applyMat,
    SigmaMon.ChoiSum.discardTwo, SigmaMon.ChoiSum.basisBra,
    Composer.projector, Matrix.mul_apply, Matrix.conjTranspose_apply,
    Composer.onWire, Composer.registerSplit, Composer.proj_2, CQ.QDim,
    h00, h01]
```

### 5.3.46 Left discard-after-copy is identity after restricting to classical bits

**Statement.** Left discard-after-copy is identity after restricting to classical bits.

**Proof.** The key step rewrites with the fact that discard is insensitive to computational-basis dephasing, the fact that the bit left counit superoperator equals a dephase and the fact that computational-basis dephasing is idempotent.

**Lean 4 source** [QLambda/Linear/FragmentClassicalBitChannels.lean](#)

```
theorem bitClassicalLeftCounitChannel :
  Superoperator.comp bitDephaseSuperoperator
    (Superoperator.comp (Superoperator.tensorLeftUnitor 2)
      (Superoperator.comp
        (Superoperator.tensor
          (Superoperator.comp SigmaMon.ChoiSum.discardTwo
            bitDephaseSuperoperator)
          (Superoperator.identity 2)))
```

```

        bitCopySuperoperator)) =
    bitDephaseSuperoperator := by
rw [bitDiscard_comp_dephase]
change Superoperator.comp bitDephaseSuperoperator
    bitLeftCounitSuperoperator = bitDephaseSuperoperator
rw [bitLeftCounitSuperoperator_eq_dephase]
exact bitDephaseSuperoperator_idempotent

```

### 5.3.47 Right discard-after-copy is identity after restricting to classical bits

**Statement.** Right discard-after-copy is identity after restricting to classical bits.

**Proof.** The key step rewrites with the fact that discard is insensitive to computational-basis dephasing, the fact that the bit right counit superoperator equals a dephase and the fact that computational-basis dephasing is idempotent.

**Lean 4 source** [QLambda/Linear/FragmentClassicalBitChannels.lean](#)

```

theorem bitClassicalRightCounitChannel :
  Superoperator.comp bitDephaseSuperoperator
    (Superoperator.comp (Superoperator.tensorRightUnitor 2)
      (Superoperator.comp
        (Superoperator.tensor (Superoperator.identity 2)
          (Superoperator.comp SigmaMon.ChoiSum.discardTwo
            bitDephaseSuperoperator))
        bitCopySuperoperator)) =
  bitDephaseSuperoperator := by
rw [bitDiscard_comp_dephase]
change Superoperator.comp bitDephaseSuperoperator
    bitRightCounitSuperoperator = bitDephaseSuperoperator
rw [bitRightCounitSuperoperator_eq_dephase]
exact bitDephaseSuperoperator_idempotent

```

### 5.3.48 The inherited Choi summation on dephasing-fixed bit maps

**Definition.** The inherited Choi summation on dephasing-fixed bit maps.

**Construction.** Constructed by supplying each component: carrier, zero, summation, uniqueness, empty, singleton, remove zero and reindexing, among others. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Linear/FragmentClassicalBitModule.lean](#)

```

noncomputable def classicalBitFiber (n : Nat) : Fiber where
  Carrier := ClassicalBitCarrier n
  zero := 0
  summation :=
    { HasSum := fun f a =>
      SigmaMon.ChoiSum.HasSum (fun i => (f i).1) a.1
    unique := by
      intro ? _ f a b ha hb
      exact Subtype.ext (SigmaMon.ChoiSum.unique ha hb)
    empty := by
      convert (SigmaMon.ChoiSum.empty :

```

```

SigmaMon.ChoiSum.HasSum (fun i : Empty => nomatch i)
  (0 : Superoperator n 2)) using 1
singleton := fun a => SigmaMon.ChoiSum.singleton a.1
remove_zero := by
  intro ? _ f s a hzero
  exact SigmaMon.ChoiSum.remove_zero
    (fun i => (f i).1) s a.1
    (fun i hi => congrArg Subtype.val (hzero i hi))
reindex := by
  intro ? ? _ _ e f a
  exact SigmaMon.ChoiSum.reindex e (fun i => (f i).1) a.1
flatten := by
  classical
  intro ? _ ? _ f a
  constructor
  * intro hflat
  rcases (SigmaMon.superoperatorPartialCountableSum.flatten
    (fun i j => (f i j).1) a.1).mp hflat with
    <g, hrows, hsum>
  let G : ? -> ClassicalBitCarrier n := fun i =>
    { val := g i
      property := by
        have hc := SigmaMon.ChoiSum.comp_left
          bitDephaseSuperoperator (hrows i)
        have hc' : SigmaMon.ChoiSum.HasSum
          (fun j => (f i j).1)
          (Superoperator.comp bitDephaseSuperoperator (g i)) := by
          convert hc using 1
          funext j
          exact (f i j).property.symm
          exact SigmaMon.ChoiSum.unique hc' (hrows i) }
  exact <G, fun i => hrows i, hsum>
  * rintro <g, hrows, hsum>
  exact (SigmaMon.superoperatorPartialCountableSum.flatten
    (fun i j => (f i j).1) a.1).mpr
    <fun i => (g i).1, hrows, hsum> }

```

### 5.3.49 Module of classical bit maps

**Definition.** Module of classical bit maps. Action is precomposition, and fixedness is closed under all partial sums required by Module.

**Construction.** Constructed by supplying each component: obj, act, act zero element, act zero functorial action, act identity, act composite, act sum element and act sum functorial action, among others. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Linear/FragmentClassicalBitModule.lean](#)

```

noncomputable def classicalBitModule : Module where
  obj := classicalBitFiber
  act := fun x f => <Superoperator.comp x.1 f, by
    calc
      Superoperator.comp bitDephaseSuperoperator
        (Superoperator.comp x.1 f) =
        Superoperator.comp

```

```

      (Superoperator.comp bitDephaseSuperoperator x.1) f :=
        Superoperator.comp_assoc _ _ _
    _ = Superoperator.comp x.1 f :=
      congrArg (fun z => Superoperator.comp z f) x.2>
act_zero_element := by
  intro m n f
  apply Subtype.ext
  exact Superoperator.comp_zero_left f
act_zero_map := by
  intro m n x
  apply Subtype.ext
  exact Superoperator.comp_zero_right x.1
act_id := by
  intro n x
  apply Subtype.ext
  exact Superoperator.comp_identity x.1
act_comp := by
  intro l m n x f g
  apply Subtype.ext
  exact (Superoperator.comp_assoc x.1 f g).symm
act_sum_element := by
  intro ? _ m n x s f h
  exact SigmaMon.ChoiSum.comp_right f h
act_sum_map := by
  intro ? _ m n x f s h
  exact SigmaMon.ChoiSum.comp_left x.1 h
act_sum_from_one := by
  intro ? _ m x s f h
  change SigmaMon.ChoiSum.HasSum (fun i => (x i).1) s.1 at h
  obtain <z, hz> := (representable 2).act_sum_from_one f h
  have hz' : SigmaMon.ChoiSum.HasSum
    (fun i => Superoperator.comp bitDephaseSuperoperator
      (Superoperator.comp (x i).1 (f i)))
    (Superoperator.comp bitDephaseSuperoperator z) :=
    SigmaMon.ChoiSum.comp_left bitDephaseSuperoperator hz
  have heach : (fun i => Superoperator.comp bitDephaseSuperoperator
    (Superoperator.comp (x i).1 (f i))) =
    (fun i => Superoperator.comp (x i).1 (f i)) := by
    funext i
  calc
    Superoperator.comp bitDephaseSuperoperator
      (Superoperator.comp (x i).1 (f i)) =
      Superoperator.comp
        (Superoperator.comp bitDephaseSuperoperator (x i).1) (f i) :=
        Superoperator.comp_assoc _ _ _
    _ = Superoperator.comp (x i).1 (f i) :=
      congrArg (fun z => Superoperator.comp z (f i)) (x i).2
  have hfix : Superoperator.comp bitDephaseSuperoperator z = z :=
    SigmaMon.ChoiSum.unique (heach |> hz') hz
  refine <<z, hfix>, ?_>
  change SigmaMon.ChoiSum.HasSum
    (fun i => Superoperator.comp (x i).1 (f i)) z
  exact hz
act_sum_tensor_from_one := by
  intro ? _ m A x s f h
  change SigmaMon.ChoiSum.HasSum (fun i => (x i).1) s.1 at h

```

```

obtain <z, hz> := (representable 2).act_sum_tensor_from_one f h
have hz' : SigmaMon.ChoiSum.HasSum
  (fun i => Superoperator.comp bitDephaseSuperoperator
    (Superoperator.comp (x i).1
      (Superoperator.tensor (f i) (Superoperator.identity A))))
  (Superoperator.comp bitDephaseSuperoperator z) :=
SigmaMon.ChoiSum.comp_left bitDephaseSuperoperator hz
have heach : (fun i => Superoperator.comp bitDephaseSuperoperator
  (Superoperator.comp (x i).1
    (Superoperator.tensor (f i) (Superoperator.identity A)))) =
  (fun i => Superoperator.comp (x i).1
    (Superoperator.tensor (f i) (Superoperator.identity A))) := by
  funext i
  calc
    Superoperator.comp bitDephaseSuperoperator
      (Superoperator.comp (x i).1 _) =
    Superoperator.comp
      (Superoperator.comp bitDephaseSuperoperator (x i).1) _ :=
    Superoperator.comp_assoc _ _ _
    _ = Superoperator.comp (x i).1 _ :=
    congrArg (fun z => Superoperator.comp z
      (Superoperator.tensor (f i) (Superoperator.identity A))) (x i).2
have hfix : Superoperator.comp bitDephaseSuperoperator z = z :=
  SigmaMon.ChoiSum.unique (heach |> hz') hz
refine <<z, hfix>, ?_>
change SigmaMon.ChoiSum.HasSum
  (fun i => Superoperator.comp (x i).1
    (Superoperator.tensor (f i) (Superoperator.identity A))) z
exact hz

```

### 5.3.50 Forget that a bit map is dephasing-fixed

**Definition.** Forget that a bit map is dephasing-fixed.

**Construction.** Constructed by supplying each component: application, functorial action zero, functorial action sum and naturality. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Linear/FragmentClassicalBitModule.lean](#)

```

noncomputable def classicalBitInclusion :
  Hom classicalBitModule (representable 2) where
  app := fun _ x => x.1
  map_zero := fun _ => rfl
  map_sum := fun h => h
  naturality := fun _ _ => rfl

```

### 5.3.51 Project a physical bit map to its computational-basis classical part

**Definition.** Project a physical bit map to its computational-basis classical part.

**Construction.** Constructed by supplying each component: application, functorial action zero, functorial action sum and naturality. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Linear/FragmentClassicalBitModule.lean](#)



```

noncomputable def bitClassicalize :
  Hom (representable 2) classicalBitModule where
  app := fun _ x =>
    <Superoperator.comp bitDephaseSuperoperator x, by
      calc
        Superoperator.comp bitDephaseSuperoperator
          (Superoperator.comp bitDephaseSuperoperator x) =
          Superoperator.comp
            (Superoperator.comp bitDephaseSuperoperator
              bitDephaseSuperoperator) x :=
              Superoperator.comp_assoc _ _ _
    _ = Superoperator.comp bitDephaseSuperoperator x :=
      congrArg (fun z => Superoperator.comp z x)
        bitDephaseSuperoperator_idempotent>
  map_zero := by
    intro n
    apply Subtype.ext
    exact Superoperator.comp_zero_right _
  map_sum := by
    intro ? _ n f x h
    exact SigmaMon.ChoiSum.comp_left bitDephaseSuperoperator h
  naturality := by
    intro m n x f
    apply Subtype.ext
    exact Superoperator.comp_assoc _ _ _

```

### 5.3.52 Classical bits are fixed points of bit classicalize

**Statement.** Classical bits are fixed points of bitClassicalize. Formally:  $\text{Hom.comp bitClassicalize classicalBitInclusion} = \text{Hom.id classicalBitModule}$ .

**Proof.** Both sides are compared pointwise (by extensionality). It follows from the extensionality for bilinear maps.

**Lean 4 source** [QLambda/Linear/FragmentClassicalBitModule.lean](#)

```

theorem bitClassicalize_comp_classicalBitInclusion :
  Hom.comp bitClassicalize classicalBitInclusion =
    Hom.id classicalBitModule := by
  ext n x
  apply Subtype.ext
  change Superoperator.comp bitDephaseSuperoperator x.1 = x.1
  exact x.2

```

### 5.3.53 Computational-basis preparations are fixed by dephasing

**Statement.** Computational-basis preparations are fixed by dephasing.

**Proof.** By case analysis on  $p$ . It follows from the underlying completely positive map of a composite for superoperators, the coordinate formula for intrinsic Choi composition, the definition of the bit dephase superoperator and the Choi matrix of a sum for completely positive maps.

**Lean 4 source** [QLambda/Linear/FragmentClassicalBitModule.lean](#)

```

theorem bitDephase_comp_isometricBasisPrep (i : Fin 2) :
  Superoperator.comp bitDephaseSuperoperator
    (SigmaMon.ChoiSum.isometricBasisPrep i) =
    SigmaMon.ChoiSum.isometricBasisPrep i := by
  apply Superoperator.ext
  apply CPMMap.ext
  funext p q
  have h00 :
    ((Composer.splitWire (0 : Fin 1)) ((Composer.basisEquiv 1) 0)).1 =
      false := by decide
  have h01 :
    ((Composer.splitWire (0 : Fin 1)) ((Composer.basisEquiv 1) 1)).1 =
      true := by decide
  rcases p with <a, u>
  rcases q with <b, v>
  fin_cases u; fin_cases v
  fin_cases i <;> fin_cases a <;> fin_cases b <;>
  norm_num [Superoperator.cp_comp, CPMMap.choi_comp_apply,
    bitDephaseSuperoperator, CPMMap.choi_add, Matrix.add_apply,
    Instrument.measure_branch_zero, Instrument.measure_branch_one,
    CPMMap.choi_ofKraus, KrausFamily.choiTerm,
    SigmaMon.ChoiSum.isometricBasisPrep, SigmaMon.ChoiSum.basisKet,
    Matrix.conjTranspose_apply,
    Composer.projector, Composer.onWire, Composer.registerSplit,
    Composer.proj_2, CQ.QDim, h00, h01]

```

### 5.3.54 The generic dephased classical bit at fiber two

**Definition.** The generic dephased classical bit at fiber two.

**Construction.** Constructed by supplying each component of the structure explicitly.

**Lean 4 source** [QLambda/Linear/FragmentClassicalBitModule.lean](#)

```

noncomputable def classicalBitGeneric :
  (classicalBitModule.obj 2).Carrier :=
  <bitDephaseSuperoperator, bitDephaseSuperoperator_idempotent>

```

### 5.3.55 Weakening for the dephasing-fixed classical-bit module

**Definition.** Weakening for the dephasing-fixed classical-bit module.

**Construction.** Constructed by supplying each component: application, functorial action zero, functorial action sum and naturality. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Linear/FragmentClassicalBitModule.lean](#)

```

noncomputable def classicalBitWeakening :
  Hom classicalBitModule dayTensorUnit where
  app := fun _ x => Superoperator.comp SigmaMon.ChoiSum.discardTwo x.1
  map_zero := by
    intro n
    exact Superoperator.comp_zero_right _
  map_sum := by
    intro ? _ n f s h

```

```

    exact SigmaMon.ChoiSum.comp_left SigmaMon.ChoiSum.discardTwo h
  naturality := by
    intro m n x f
    exact Superoperator.comp_assoc _ _ _

```

### 5.3.56 Contraction for dephasing-fixed classical bits

**Definition.** Contraction for dephasing-fixed classical bits. A single coend generator avoids an inadmissible branch-dependent Day sum.

**Construction.** Constructed by supplying each component: application, functorial action zero, functorial action sum and naturality. The accompanying laws are verified from the definitions.

#### Lean 4 source `QLambda/Linear/FragmentClassicalBitModule.lean`

```

noncomputable def classicalBitContraction :
  Hom classicalBitModule
    (dayTensor classicalBitModule classicalBitModule) where
  app := fun _ x =>
    (dayTensor classicalBitModule classicalBitModule).act
      ((DayCoend.intro classicalBitModule classicalBitModule).app
        classicalBitGeneric classicalBitGeneric)
      (Superoperator.comp bitCopySuperoperator x.1)
  map_zero := by
    intro n
    change
      (dayTensor classicalBitModule classicalBitModule).act
        ((DayCoend.intro classicalBitModule classicalBitModule).app
          classicalBitGeneric classicalBitGeneric)
        (Superoperator.comp bitCopySuperoperator
          (0 : Superoperator n 2)) = 0
  rw [Superoperator.comp_zero_right,
    (dayTensor classicalBitModule classicalBitModule).act_zero_map]
  map_sum := by
    intro ? _ n f s h
    apply (dayTensor classicalBitModule classicalBitModule).act_sum_map
    exact SigmaMon.ChoiSum.comp_left bitCopySuperoperator h
  naturality := by
    intro m n x f
    rw [(dayTensor classicalBitModule classicalBitModule).act_comp]
    congr 1
    exact Superoperator.comp_assoc _ _ _

```

### 5.3.57 Unit and bit literals are values, so no closed one-step reduction applies

**Statement.** Unit and bit literals are values, so no closed Step applies. Formally: False.

**Proof.** By case analysis on the derivation that either  $M = \text{.unit}$  or there is  $b$  such that  $M = \text{.bitLit } b$ .

#### Lean 4 source `QLambda/Linear/FragmentCoherenceCore.lean`

```

theorem fragment_closed_literal_not_step {M M' : Term}
  (h : M = .unit  \/  exists b, M = .bitLit b) (hs : Step M M') : False := by

```

```
rcases h with rfl | <b, rfl>
* cases hs
* cases hs
```

### 5.3.58 Denotational soundness for closed unit

**Statement.** Denotational soundness for closed unit. Formally: `FragCert.denote c = FragmentContext.closedPoint routeAFragmentModel.unitIntro`.

**Proof.** The proof term combines the facts named in it directly.

#### Lean 4 source `QLambda/Linear/FragmentCoherenceCore.lean`

```
theorem fragment_step_denote_sound_unit
  (c : FragCert.Closed .unit .unit) :
  FragCert.denote c =
    FragmentContext.closedPoint routeAFragmentModel.unitIntro :=
  routeAFragmentDenotationModel.denote_unit c
```

### 5.3.59 Denotational soundness for closed bit literals

**Statement.** Denotational soundness for closed bit literals. Formally: `FragCert.denote c = FragmentContext.closedPoint (routeAFragmentModel.bitLit b)`.

**Proof.** The proof term combines the facts named in it directly.

#### Lean 4 source `QLambda/Linear/FragmentCoherenceCore.lean`

```
theorem fragment_step_denote_sound_bitLit {b : Bool}
  (c : FragCert.Closed (.bitLit b) .bit) :
  FragCert.denote c =
    FragmentContext.closedPoint (routeAFragmentModel.bitLit b) :=
  routeAFragmentDenotationModel.denote_bitLit b c
```

### 5.3.60 Combined closed-literal denotational soundness package

**Statement.** Combined closed-literal denotational soundness package.

**Proof.** The witness is assembled directly from its components, using the denotational soundness for closed unit.

#### Lean 4 source `QLambda/Linear/FragmentCoherenceCore.lean`

```
theorem fragment_closed_literal_denote_sound :
  (forall c : FragCert.Closed .unit .unit,
    FragCert.denote c =
      FragmentContext.closedPoint routeAFragmentModel.unitIntro) /\
  (forall b (c : FragCert.Closed (.bitLit b) .bit),
    FragCert.denote c =
      FragmentContext.closedPoint (routeAFragmentModel.bitLit b)) :=
  <fragment_step_denote_sound_unit, fun _ => fragment_step_denote_sound_bitLit>
```

### 5.3.61 Classical `ite true` redex denotation expands through the controlled eliminator and the true bit literal

**Statement.** Classical `ite true` redex denotation expands through the controlled eliminator and the true bit literal.

**Proof.** By definition. Unfolding the denotation turns the left-hand side, an explicit expression in the denotation and the  $1 \times 1$  matrix of the `h` linear, into the right-hand side, an explicit expression in the composition, the conditional elimination, the functorial action and the combined point; the two sides are the same term.

#### Lean 4 source `QLambda/Linear/FragmentCoherenceCore.lean`

```
theorem fragment_step_denote_sound_iteTrue {Gamma Delta Delta_1 Delta_2 A T E}
  (hGamma : CtxUAllBit Gamma) (hDeltactx : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hA : Ty.SemanticFragment A)
  (hDelta_1 : AllNone Delta_1)
  (hL_1 : CtxLAllSomeFragment Delta_1)
  (cT : FragCert Gamma Delta_2 T A) (cE : FragCert Gamma Delta_2 E A) :
  FragCert.denote
    (.ite hGamma hDeltactx hs hA
      (.bitLit hGamma hL_1 true hDelta_1) cT cE) =
  Hom.comp (routeAFragmentBranching.iteElim hA)
    (Hom.comp
      (DayTensor.map
        (FragmentContext.combinedPoint hGamma hDelta_1
          (routeAFragmentModel.bitLit true)))
        (additivePair (FragCert.denote cT) (FragCert.denote cE)))
      (FragmentContext.combinedOSplit hGamma hs)) :=
rfl
```

### 5.3.62 Classical `ite false` redex denotation expands through the controlled eliminator and the false bit literal

**Statement.** Classical `ite false` redex denotation expands through the controlled eliminator and the false bit literal.

**Proof.** By definition. Unfolding the denotation turns the left-hand side, an explicit expression in the denotation and the  $1 \times 1$  matrix of the `h` linear, into the right-hand side, an explicit expression in the composition, the conditional elimination, the functorial action and the combined point; the two sides are the same term.

#### Lean 4 source `QLambda/Linear/FragmentCoherenceCore.lean`

```
theorem fragment_step_denote_sound_iteFalse {Gamma Delta Delta_1 Delta_2 A T E}
  (hGamma : CtxUAllBit Gamma) (hDeltactx : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hA : Ty.SemanticFragment A)
  (hDelta_1 : AllNone Delta_1)
  (hL_1 : CtxLAllSomeFragment Delta_1)
  (cT : FragCert Gamma Delta_2 T A) (cE : FragCert Gamma Delta_2 E A) :
  FragCert.denote
    (.ite hGamma hDeltactx hs hA
      (.bitLit hGamma hL_1 false hDelta_1) cT cE) =
  Hom.comp (routeAFragmentBranching.iteElim hA)
```

```

(Hom.comp
  (DayTensor.map
    (FragmentContext.combinedPoint hGamma hDelta_1
      (routeAFragmentModel.bitLit false))
    (additivePair (FragCert.denote cT) (FragCert.denote cE)))
  (FragmentContext.combinedOSplit hGamma hs)) :=
rfl

```

### 5.3.63 Closed first-order `ite true` reduces denotationally to the then branch

**Statement.** Closed first-order `ite true` reduces denotationally to the then branch.

**Proof.** This is an instance of the unconditional closed FO `ite true` Step soundness, applied to the hypothesis that  $A$  is a first-order type.

#### Lean 4 source `QLambda/Linear/FragmentCoherenceCore.lean`

```

theorem fragment_step_denote_sound_iteTrue_closed {A : Ty}
  (hFO : Ty.FirstOrder A) {T E : Term}
  (cT : FragCert.Closed T A) (cE : FragCert.Closed E A) :
  FragCert.denote
    (.ite CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil
      (Ty.SemanticFragment.ofFirstOrder hFO)
      (FragCert.closed_bitLit_cert true) cT cE) =
    FragCert.denote cT :=
  FragCert.denote_ite_true_closed hFO cT cE

```

### 5.3.64 Closed first-order `ite false` reduces denotationally to the else branch

**Statement.** Closed first-order `ite false` reduces denotationally to the else branch.

**Proof.** This is an instance of the unconditional closed FO `ite false` Step soundness, applied to the hypothesis that  $A$  is a first-order type.

#### Lean 4 source `QLambda/Linear/FragmentCoherenceCore.lean`

```

theorem fragment_step_denote_sound_iteFalse_closed {A : Ty}
  (hFO : Ty.FirstOrder A) {T E : Term}
  (cT : FragCert.Closed T A) (cE : FragCert.Closed E A) :
  FragCert.denote
    (.ite CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil
      (Ty.SemanticFragment.ofFirstOrder hFO)
      (FragCert.closed_bitLit_cert false) cT cE) =
    FragCert.denote cE :=
  FragCert.denote_ite_false_closed hFO cT cE

```

### 5.3.65 Measurement continuation denotation agrees with measurement elimination

**Statement.** Measurement continuation denotation agrees with `measureElim`.

**Proof.** This is an instance of the formula for the denotation of the measurement, applied to the hypothesis that every unrestricted variable of  $\Gamma$  has bit type, the hypothesis that every cell of the linear context  $\Delta$  is

occupied by a fragment type, the hypothesis that  $\Delta$  splits into the left part  $\Delta_1$  and the right part  $\Delta_2$  and the hypothesis that A lies in the semantic fragment.

#### Lean 4 source `QLambda/Linear/FragmentCoherenceCore.lean`

```
theorem fragment_measStep_denote_sound_measure {Gamma Delta Delta_1 Delta_2 A Q K}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hA : Ty.SemanticFragment A)
  (cQ : FragCert Gamma Delta_1 Q .qubit)
  (cK : FragCert Gamma Delta_2 K (.arrow .unres .bit (.arrow .lin .qubit A))) :
  FragCert.denote (.measure hGamma hDelta hs hA cQ cK) =
    Hom.comp (FragCert.measureElim _)
      (Hom.comp
        (DayTensor.map (FragCert.denote cQ) (FragCert.denote cK))
        (FragmentContext.combinedOSplit hGamma hs)) :=
  FragCert.denote_measure_eq hGamma hDelta hs hA cQ cK
```

### 5.3.66 Measurement branch maps agree with the Yoneda packaging (Born side)

**Statement.** Measurement branch maps agree with the Yoneda packaging (Born side). Formally: `routeA FragmentModel.measureBranch b = measureBranchYoneda b`.

**Proof.** This is an instance of the fact that measurement branch maps agree with the Yoneda packaging.

#### Lean 4 source `QLambda/Linear/FragmentCoherenceCore.lean`

```
theorem fragment_measStep_denote_sound_branch (b : Bool) :
  routeAFragmentModel.measureBranch b = measureBranchYoneda b :=
  fragment_measureBranch_agrees b
```

### 5.3.67 Day $\beta$ : evaluating a curried Day morphism recovers the original

**Statement.** Day  $\beta$ : evaluating a curried Day morphism recovers the original. Formally: `Hom.comp (FragmentContext.dayEval A N) (DayTensor.map (FragmentContext.dayCurry f) (Hom.id A)) = f`.

**Proof.** This is an instance of the Day  $\beta$ : evaluating a curried Day morphism recovers the original.

#### Lean 4 source `QLambda/Linear/FragmentCoherenceCore.lean`

```
theorem fragment_day_beta {X A N : Module}
  (f : Hom (dayTensor X A) N) :
  Hom.comp (FragmentContext.dayEval A N)
    (DayTensor.map (FragmentContext.dayCurry f) (Hom.id A)) =
    f :=
  FragmentContext.dayEval_dayCurry f
```

### 5.3.68 Day $\eta$ : currying an evaluated Day morphism recovers the original

**Statement.** Day  $\eta$ : currying an evaluated Day morphism recovers the original. Formally: `FragmentContext.dayCurry (Hom.comp (FragmentContext.dayEval A N) (DayTensor.map g (Hom.id A))) = g`.

**Proof.** This is an instance of the Day  $\eta$ : currying an evaluated Day morphism recovers the original.

#### Lean 4 source `QLambda/Linear/FragmentCoherenceCore.lean`

```
theorem fragment_day_eta {X A N : Module}
  (g : Hom X (dayInternalHom A N)) :
  FragmentContext.dayCurry
    (Hom.comp (FragmentContext.dayEval A N)
      (DayTensor.map g (Hom.id A))) =
  g :=
  FragmentContext.dayCurry_dayEval g
```

### 5.3.69 Package: fragment-admitted operational constructors have denotational soundness equations on denotation

**Statement.** Package: fragment-admitted operational constructors have denotational soundness equations on `FragCert.denote`, including closed FO  $\beta$ , Day closedness triangles, and FO Day  $\beta$  for linear abstraction.

**Proof.** The witness is assembled directly from its components, using the denotational soundness for closed unit.

#### Lean 4 source `QLambda/Linear/FragmentCoherenceCore.lean`

```
theorem fragment_step_denote_sound :
  (forall c : FragCert.Closed .unit .unit,
    FragCert.denote c =
      FragmentContext.closedPoint routeAFragmentModel.unitIntro) /\
  (forall b (c : FragCert.Closed (.bitLit b) .bit),
    FragCert.denote c =
      FragmentContext.closedPoint (routeAFragmentModel.bitLit b)) /\
  (forall b, routeAFragmentModel.measureBranch b = measureBranchYoneda b) /\
  (forall {A : Ty} (hFO : Ty.FirstOrder A) {T E : Term}
    (cT : FragCert.Closed T A) (cE : FragCert.Closed E A),
    FragCert.denote
      (.ite CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil
        (Ty.SemanticFragment.ofFirstOrder hFO)
        (FragCert.closed_bitLit_cert true) cT cE) =
      FragCert.denote cT) /\
  (forall {A : Ty} (hFO : Ty.FirstOrder A) {T E : Term}
    (cT : FragCert.Closed T A) (cE : FragCert.Closed E A),
    FragCert.denote
      (.ite CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil
        (Ty.SemanticFragment.ofFirstOrder hFO)
        (FragCert.closed_bitLit_cert false) cT cE) =
      FragCert.denote cE) /\
  (forall {X A N : Module} (f : Hom (dayTensor X A) N),
    Hom.comp (FragmentContext.dayEval A N)
      (DayTensor.map (FragmentContext.dayCurry f) (Hom.id A)) =
    f) /\
  (forall {X A N : Module} (g : Hom X (dayInternalHom A N)),
    FragmentContext.dayCurry
      (Hom.comp (FragmentContext.dayEval A N)
        (DayTensor.map g (Hom.id A))) =
    g) /\
```



```

(forall (d : Nat) {X N : Module}
  (f : Hom (dayTensor X (representable d)) N),
  Hom.comp (FragmentContext.evalFirstOrder d N)
    (DayTensor.map (FragmentContext.curryFirstOrder d f)
      (Hom.id (representable d))) =
  f) /\
(forall {U L N : Module} {A : Ty} (hA : Ty.FirstOrder A)
  (body : Hom (dayTensor U (dayTensor (fragmentModule A) L)) N),
  Hom.comp (FragmentContext.evalFragmentFirstOrder hA N)
    (DayTensor.map (FragmentContext.abstractLinear hA body)
      (Hom.id (fragmentModule A))) =
  Hom.comp body
    (FragmentContext.moveArgumentIntoLinear U L (fragmentModule A))) :=
<fragment_step_denote_sound_unit, fun _ => fragment_step_denote_sound_bitLit,
  fragment_measStep_denote_sound_branch,
  fun {_A} hFO {_T} {_E} cT cE =>
    fragment_step_denote_sound_iteTrue_closed hFO cT cE,
  fun {_A} hFO {_T} {_E} cT cE =>
    fragment_step_denote_sound_iteFalse_closed hFO cT cE,
  fun {_X} {_A} {_N} f => fragment_day_beta f,
  fun {_X} {_A} {_N} g => fragment_day_eta g,
  fun d {_X} {_N} f => FragmentContext.evalFirstOrder_curryFirstOrder d f,
  fun {_U} {_L} {_N} {_A} hA body =>
    FragmentContext.evalFragmentFirstOrder_abstractLinear hA body>

```

### 5.3.70 Alias retained for citations that name measurement soundness separately

**Statement.** Alias retained for citations that name measurement soundness separately. Formally:  $\forall b$ , `routeAFragmentModel.measureBranch b = measureBranchYoneda b`.

**Proof.** This is an instance of the fact that measurement branch maps agree with the Yoneda packaging (Born side).

#### Lean 4 source `QLambda/Linear/FragmentCoherenceCore.lean`

```

theorem fragment_measStep_denote_sound :
  (forall b, routeAFragmentModel.measureBranch b = measureBranchYoneda b) :=
  fragment_measStep_denote_sound_branch

```

### 5.3.71 Linear first-order evaluation uses the representable closed structure

**Statement.** Linear first-order evaluation uses the representable closed structure.

**Proof.** By definition. Unfolding the evaluation first order turns the left-hand side, the evaluation first order of `d` and `N`, into the right-hand side, the composite of the Day evaluation of representable `d` and `N` after the functorial action of `(dayInternalHomRepresentableIso d N).inv` and `Hom.id (representable d)`; the two sides are the same term.

#### Lean 4 source `QLambda/Linear/FragmentCoherenceCore.lean`

```

theorem fragment_linear_eval_agrees (d : Nat) (N : Module) :
  FragmentContext.evalFirstOrder d N =
  Hom.comp (FragmentContext.dayEval (representable d) N)
    (DayTensor.map

```

```

      (dayInternalHomRepresentableIso d N).inv
      (Hom.id (representable d))) :=
rfl

```

### 5.3.72 Classical-bit comonoid supplies unrestricted copy/discard laws

**Statement.** Classical-bit comonoid supplies unrestricted copy/discard laws.

**Proof.** The witness is assembled directly from its components, using reflexivity of equality.

#### Lean 4 source `QLambda/Linear/FragmentCoherenceCore.lean`

```

theorem fragment_classical_bit_comonoid :
  FragmentContext.classicalBitComonoid.carrier = classicalBitModule /\
  FragmentContext.classicalBitComonoid.counit = classicalBitWeakening /\
  FragmentContext.classicalBitComonoid.comult = classicalBitContraction :=
<rfl, rfl, rfl>

```

### 5.3.73 Semantic substitution spine for linear application: denotation of linear application of `arg` expands as evaluation

**Statement.** Semantic substitution spine for linear application: denotation of `appL (lamL body) arg` expands as `eval ∘ (lam ⊗ arg) ∘ split`.

**Proof.** The key step rewrites with the formula for the denotation of the linear application and the formula for the denotation of the linear lambda abstraction.

#### Lean 4 source `QLambda/Linear/FragmentCoherenceCore.lean`

```

theorem fragment_subst_lin_spine {Gamma Delta Delta_1 Delta_2 A B M X}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hAd : Ty.Admissible A) (hFO : Ty.FirstOrder A
  )
  (hB : Ty.SemanticFragment B)
  (hL_1 : CtxLAllSomeFragment Delta_1)
  (cBody : FragCert Gamma (some A :: Delta_1) M B)
  (cX : FragCert Gamma Delta_2 X A) :
  FragCert.denote
    (.appL hGamma hDelta hs hFO hB
      (.lamL hGamma hL_1 hAd hFO hB cBody) cX) =
  Hom.comp (FragmentContext.evalFragmentFirstOrder hFO _)
    (Hom.comp
      (DayTensor.map
        (FragmentContext.abstractLinear hFO (FragCert.denote cBody))
        (FragCert.denote cX))
      (FragmentContext.combinedOSplit hGamma hs)) := by
  rw [FragCert.denote_appL_eq, FragCert.denote_lamL_eq]
  rfl

```

### 5.3.74 Semantic substitution spine for unrestricted bit application

**Statement.** Semantic substitution spine for unrestricted bit application: denotation of `appU (lamU body) arg` expands as `eval ∘ (lam ⊗ arg) ∘ split`.

**Proof.** The key step rewrites with the formula for the denotation of the unrestricted application and the formula for the denotation of the unrestricted lambda abstraction.

#### Lean 4 source `QLambda/Linear/FragmentCoherenceCore.lean`

```
theorem fragment_subst_unres_bit_spine {Gamma Delta DeltaF DeltaX B M X}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta DeltaF DeltaX) (hAd : Ty.Admissible .bit)
  (hDup : Ty.Duplicable .bit) (hN : AllNone DeltaX)
  (hArr : Ty.SemanticFragment (.arrow .unres .bit B))
  (hB : Ty.SemanticFragment B)
  (hLF : CtxLAllSomeFragment DeltaF) (hDeltaF : AllNone DeltaF)
  (cBody : FragCert (.bit :: Gamma) DeltaF M B)
  (cX : FragCert Gamma DeltaX X .bit) :
  FragCert.denote
    (.appU hGamma hDelta hs hN hB
      (.lamU hGamma hLF hAd hDup hDeltaF hArr cBody) cX) =
  Hom.comp (FragmentContext.evalUnrestrictedBit _)
    (Hom.comp
      (DayTensor.map
        (FragmentContext.abstractUnrestricted (FragCert.denote cBody))
        (FragCert.denote cX))
      (FragmentContext.combinedOSplit hGamma hs)) := by
  rw [FragCert.denote_appU_eq, FragCert.denote_lamU_eq]
  rfl
```

### 5.3.75 Classical-bit contraction satisfies the left counit law in the genuine Day tensor

**Statement.** Classical-bit contraction satisfies the left counit law in the genuine Day tensor.

**Proof.** By case analysis on  $x$ . The key step rewrites with the functorial action on an introduced element, the components of the identity, the left unitor on an introduced element and the definition of the classical bit superoperator module.

#### Lean 4 source `QLambda/Linear/FragmentContextComonoid.lean`

```
theorem classicalBitContraction_left_counit :
  Hom.comp (leftUnitor classicalBitModule)
    (Hom.comp
      (map classicalBitWeakening (Hom.id classicalBitModule))
      classicalBitContraction) =
  Hom.id classicalBitModule := by
  apply Hom.ext
  intro n x
  rcases x with <x, hx>
  change
    (leftUnitor classicalBitModule).app n
      ((map classicalBitWeakening (Hom.id classicalBitModule)).app n
        ((dayTensor classicalBitModule classicalBitModule).act
          ((DayCoend.intro classicalBitModule classicalBitModule).app
            classicalBitGeneric classicalBitGeneric)
            (Superoperator.comp bitCopySuperoperator x))) =
    <x, hx>
  rw [(map classicalBitWeakening (Hom.id classicalBitModule)).naturality]
  rw [map_intro, Hom.id_app]
```

```

rw [(leftUnitor classicalBitModule).naturality]
change
  classicalBitModule.act
    ((leftUnitor classicalBitModule).app (2 * 2)
      ((DayCoend.intro dayTensorUnit classicalBitModule).app
        (Superoperator.comp SigmaMon.ChoiSum.discardTwo
          bitDephaseSuperoperator)
        classicalBitGeneric))
    (Superoperator.comp bitCopySuperoperator x) =
  <x, hx>
rw [leftUnitor_intro]
apply Subtype.ext
simp only [classicalBitModule, classicalBitGeneric]
rw [ <- Superoperator.comp_assoc]
rw [Superoperator.comp_assoc
  (Superoperator.comp
    (Superoperator.tensorLeftUnitor 2)
    (Superoperator.tensor
      (Superoperator.comp SigmaMon.ChoiSum.discardTwo
        bitDephaseSuperoperator)
      (Superoperator.identity 2)))
  bitCopySuperoperator x]
rw [Superoperator.comp_assoc]
have hc :
  Superoperator.comp bitDephaseSuperoperator
    (Superoperator.comp
      (Superoperator.comp
        (Superoperator.tensorLeftUnitor 2)
        (Superoperator.tensor
          (Superoperator.comp SigmaMon.ChoiSum.discardTwo
            bitDephaseSuperoperator)
          (Superoperator.identity 2)))
      bitCopySuperoperator) =
  bitDephaseSuperoperator := by
  simpa only [Superoperator.comp_assoc] using
    bitClassicalLeftCounitChannel
rw [hc]
exact hx

```

### 5.3.76 Classical-bit contraction satisfies the right counit law

**Statement.** Classical-bit contraction satisfies the right counit law.

**Proof.** By case analysis on  $x$ . The key step rewrites with the functorial action on an introduced element, the components of the identity, the right unitor on an introduced element and the definition of the classical bit superoperator module.

**Lean 4 source** [QLambda/Linear/FragmentContextComonoid.lean](#)

```

theorem classicalBitContraction_right_counit :
  Hom.comp (rightUnitor classicalBitModule)
    (Hom.comp
      (map (Hom.id classicalBitModule) classicalBitWeakening)
      classicalBitContraction) =
  Hom.id classicalBitModule := by

```

```

apply Hom.ext
intro n x
rcases x with <x, hx>
change
  (rightUnitor classicalBitModule).app n
  ((map (Hom.id classicalBitModule) classicalBitWeakening).app n
    ((dayTensor classicalBitModule classicalBitModule).act
      ((DayCoend.intro classicalBitModule classicalBitModule).app
        classicalBitGeneric classicalBitGeneric)
      (Superoperator.comp bitCopySuperoperator x))) =
  <x, hx>
rw [(map (Hom.id classicalBitModule) classicalBitWeakening).naturality]
rw [map_intro, Hom.id_app]
rw [(rightUnitor classicalBitModule).naturality]
change
  classicalBitModule.act
  ((rightUnitor classicalBitModule).app (2 * 2)
    ((DayCoend.intro classicalBitModule dayTensorUnit).app
      classicalBitGeneric
      (Superoperator.comp SigmaMon.ChoiSum.discardTwo
        bitDephaseSuperoperator)))
  (Superoperator.comp bitCopySuperoperator x) =
  <x, hx>
rw [rightUnitor_intro]
apply Subtype.ext
simp only [classicalBitModule, classicalBitGeneric]
rw [ <- Superoperator.comp_assoc]
rw [Superoperator.comp_assoc
  (Superoperator.comp
    (Superoperator.tensorRightUnitor 2)
    (Superoperator.tensor
      (Superoperator.identity 2)
      (Superoperator.comp SigmaMon.ChoiSum.discardTwo
        bitDephaseSuperoperator)))
  bitCopySuperoperator x]
rw [Superoperator.comp_assoc]
have hc :
  Superoperator.comp bitDephaseSuperoperator
  (Superoperator.comp
    (Superoperator.comp
      (Superoperator.tensorRightUnitor 2)
      (Superoperator.tensor
        (Superoperator.identity 2)
        (Superoperator.comp SigmaMon.ChoiSum.discardTwo
          bitDephaseSuperoperator)))
    bitCopySuperoperator) =
  bitDephaseSuperoperator := by
  simp only [Superoperator.comp_assoc] using
    bitClassicalRightCounitChannel
rw [hc]
exact hx

```

### 5.3.77 Classical-bit contraction is invariant under Day braiding

**Statement.** Classical-bit contraction is invariant under Day braiding. Formally: `Hom.comp (braiding classicalBitModule classicalBitModule) classicalBitContraction = classicalBitContraction`.

**Proof.** By case analysis on  $x$ . The key step rewrites with the braiding on an introduced element, the fact that composition for superoperators is associative, the extensionality for module morphisms and congruence of function application.

#### Lean 4 source `QLambda/Linear/FragmentContextComonoid.lean`

```
theorem classicalBitContraction_cocommutative :
  Hom.comp (braiding classicalBitModule classicalBitModule)
    classicalBitContraction =
    classicalBitContraction := by
  apply Hom.ext
  intro n x
  rcases x with <x, hx>
  change
    (braiding classicalBitModule classicalBitModule).app n
      ((dayTensor classicalBitModule classicalBitModule).act
        ((DayCoend.intro classicalBitModule classicalBitModule).app
          classicalBitGeneric classicalBitGeneric)
        (Superoperator.comp bitCopySuperoperator x)) =
      (dayTensor classicalBitModule classicalBitModule).act
        ((DayCoend.intro classicalBitModule classicalBitModule).app
          classicalBitGeneric classicalBitGeneric)
        (Superoperator.comp bitCopySuperoperator x)
  rw [(braiding classicalBitModule classicalBitModule).naturality]
  rw [braiding_intro]
  rw [(dayTensor classicalBitModule classicalBitModule).act_comp]
  congr 1
  rw [Superoperator.comp_assoc]
  exact congrArg (fun z => Superoperator.comp z x)
    bitCocommutativityLeft_eq_copy
```

### 5.3.78 Classical-bit contraction is coassociative in the genuine Day tensor

**Statement.** Classical-bit contraction is coassociative in the genuine Day tensor.

**Proof.** By case analysis on  $x$ . The key step rewrites with the functorial action on an introduced element.

#### Lean 4 source `QLambda/Linear/FragmentContextComonoid.lean`

```
theorem classicalBitContraction_coassociative :
  Hom.comp
    (associator classicalBitModule classicalBitModule classicalBitModule)
    (Hom.comp
      (map classicalBitContraction (Hom.id classicalBitModule))
      classicalBitContraction) =
  Hom.comp
    (map (Hom.id classicalBitModule) classicalBitContraction)
    classicalBitContraction := by
  apply Hom.ext
  intro n x
```

```

rcases x with <x, hx>
change
  (associator classicalBitModule classicalBitModule
    classicalBitModule).app n
  ((map classicalBitContraction (Hom.id classicalBitModule)).app n
    ((dayTensor classicalBitModule classicalBitModule).act
      ((DayCoend.intro classicalBitModule classicalBitModule).app
        classicalBitGeneric classicalBitGeneric)
      (Superoperator.comp bitCopySuperoperator x))) =
  (map (Hom.id classicalBitModule) classicalBitContraction).app n
  ((dayTensor classicalBitModule classicalBitModule).act
    ((DayCoend.intro classicalBitModule classicalBitModule).app
      classicalBitGeneric classicalBitGeneric)
    (Superoperator.comp bitCopySuperoperator x))
rw [(map classicalBitContraction (Hom.id classicalBitModule)).naturality,
  (map (Hom.id classicalBitModule) classicalBitContraction).naturality,
  map_intro, map_intro]
-- Goal now has `classicalBitContraction.app 2 classicalBitGeneric` on each side.
change
  (associator classicalBitModule classicalBitModule
    classicalBitModule).app n
  ((dayTensor
    (dayTensor classicalBitModule classicalBitModule)
    classicalBitModule).act
    ((DayCoend.intro
      (dayTensor classicalBitModule classicalBitModule)
      classicalBitModule).app
      ((dayTensor classicalBitModule classicalBitModule).act
        ((DayCoend.intro classicalBitModule classicalBitModule).app
          classicalBitGeneric classicalBitGeneric)
          (Superoperator.comp bitCopySuperoperator bitDephaseSuperoperator))
        classicalBitGeneric)
      (Superoperator.comp bitCopySuperoperator x)) =
  (dayTensor classicalBitModule
    (dayTensor classicalBitModule classicalBitModule)).act
  ((DayCoend.intro classicalBitModule
    (dayTensor classicalBitModule classicalBitModule)).app
    classicalBitGeneric
    ((dayTensor classicalBitModule classicalBitModule).act
      ((DayCoend.intro classicalBitModule classicalBitModule).app
        classicalBitGeneric classicalBitGeneric)
        (Superoperator.comp bitCopySuperoperator bitDephaseSuperoperator)))
    (Superoperator.comp bitCopySuperoperator x))
-- Reassociate nested `act`/`intro` via bilinear naturality.
have hleft_gen :
  (DayCoend.intro
    (dayTensor classicalBitModule classicalBitModule)
    classicalBitModule).app
  ((dayTensor classicalBitModule classicalBitModule).act
    ((DayCoend.intro classicalBitModule classicalBitModule).app
      classicalBitGeneric classicalBitGeneric)
    (Superoperator.comp bitCopySuperoperator bitDephaseSuperoperator))
  classicalBitGeneric =
  (dayTensor
    (dayTensor classicalBitModule classicalBitModule)
    classicalBitModule).act

```

```

    ((DayCoend.intro
      (dayTensor classicalBitModule classicalBitModule)
      classicalBitModule).app
      ((DayCoend.intro classicalBitModule classicalBitModule).app
        classicalBitGeneric classicalBitGeneric)
      classicalBitGeneric)
    (Superoperator.tensor
      (Superoperator.comp bitCopySuperoperator bitDephaseSuperoperator)
      (Superoperator.identity 2)) := by
have h :=
  (DayCoend.intro
    (dayTensor classicalBitModule classicalBitModule)
    classicalBitModule).naturalness
  ((DayCoend.intro classicalBitModule classicalBitModule).app
    classicalBitGeneric classicalBitGeneric)
  classicalBitGeneric
  (Superoperator.comp bitCopySuperoperator bitDephaseSuperoperator)
  (Superoperator.identity 2)
  simp [classicalBitModule.act_id] using h
have hright_gen :
  (DayCoend.intro classicalBitModule
    (dayTensor classicalBitModule classicalBitModule)).app
    classicalBitGeneric
    ((dayTensor classicalBitModule classicalBitModule).act
      ((DayCoend.intro classicalBitModule classicalBitModule).app
        classicalBitGeneric classicalBitGeneric)
      (Superoperator.comp bitCopySuperoperator bitDephaseSuperoperator)) =
  (dayTensor classicalBitModule
    (dayTensor classicalBitModule classicalBitModule)).act
    ((DayCoend.intro classicalBitModule
      (dayTensor classicalBitModule classicalBitModule)).app
      classicalBitGeneric
      ((DayCoend.intro classicalBitModule classicalBitModule).app
        classicalBitGeneric classicalBitGeneric))
    (Superoperator.tensor (Superoperator.identity 2)
      (Superoperator.comp bitCopySuperoperator bitDephaseSuperoperator)) := by
have h :=
  (DayCoend.intro classicalBitModule
    (dayTensor classicalBitModule classicalBitModule)).naturalness
  classicalBitGeneric
  ((DayCoend.intro classicalBitModule classicalBitModule).app
    classicalBitGeneric classicalBitGeneric)
  (Superoperator.identity 2)
  (Superoperator.comp bitCopySuperoperator bitDephaseSuperoperator)
  simp [classicalBitModule.act_id] using h
rw [hleft_gen, hright_gen]
rw [(dayTensor
  (dayTensor classicalBitModule classicalBitModule)
  classicalBitModule).act_comp,
  (dayTensor classicalBitModule
    (dayTensor classicalBitModule classicalBitModule)).act_comp]
rw [(associator classicalBitModule classicalBitModule
  classicalBitModule).naturalness]
have happ :=
  associator_intro_intro
  (M := classicalBitModule) (N := classicalBitModule)

```



```

(P := classicalBitModule)
classicalBitGeneric classicalBitGeneric classicalBitGeneric
rw [happ]
rw [(dayTensor classicalBitModule
  (dayTensor classicalBitModule classicalBitModule)).act_comp]
congr 1
-- Channels: associator comp ((C comp D)?id) comp C = (id?(C comp D)) comp C
have hchan :=
  congrArg (fun z : Superoperator 2 8 => Superoperator.comp z x)
    bitCoassocLeft_eq_right
-- Unfold the named composites and reassociate past `x`.
simp only [bitCoassocLeft, bitCoassocLeftPre, bitCoassocRight,
  Superoperator.comp_assoc] at hchan |-
exact hchan

```

### 5.3.79 OSplit preserves linear context lengths (structural coherence premise)

**Statement.** OSplit preserves linear context lengths (structural coherence premise). Formally:  $\Delta_1.length = \Delta.length \wedge \Delta_2.length = \Delta.length$ .

**Proof.** This is an instance of the fact that both parts of an ordered context split have the length of the whole context, applied to the hypothesis that  $\Delta$  splits into the left part  $\Delta_1$  and the right part  $\Delta_2$ .

#### Lean 4 source `QLambda/Linear/FragmentContextComonoid.lean`

```

theorem oSplit_lengths {Delta Delta_1 Delta_2 : List (Option Ty)}
  (h : OSplit Delta Delta_1 Delta_2) :
  Delta_1.length = Delta.length /\ Delta_2.length = Delta.length :=
  OSplit.lengths h

```

### 5.3.80 Route A fragment contexts exist without a global bang

**Statement.** Route A fragment contexts exist without a global bang.

**Proof.** The witness is assembled directly from its components, using reflexivity of equality.

#### Lean 4 source `QLambda/Linear/FragmentContextComonoid.lean`

```

theorem routeA_fragment_context_acceptance :
  (unrestricted [] = dayTensorUnit) /\
  (linear [] = dayTensorUnit) /\
  (exists ? : Hom classicalBitModule
    (dayTensor classicalBitModule classicalBitModule),
    ? = classicalBitContraction) /\
  (exists ? : Hom classicalBitModule dayTensorUnit,
    ? = classicalBitWeakening) /\
  (forall Gamma Delta, combined Gamma Delta = dayTensor (unrestricted Gamma) (
    linear Delta)) :=
  <rfl, rfl, <classicalBitContraction, rfl>,
    <classicalBitWeakening, rfl>, fun _ => rfl>

```

### 5.3.81 The dephasing-fixed classical bit is a commutative Day comonoid

**Definition.** The dephasing-fixed classical bit is a commutative Day comonoid.

**Construction.** Constructed by supplying each component: carrier, counit, comultiplication, left counit, right counit, coassociativity and cocommutativity. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Linear/FragmentContextComonoid.lean](#)

```
noncomputable def classicalBitComonoid :
  Domain.Presheaf.SuperoperatorModule.Comonoid where
  carrier := classicalBitModule
  counit  := classicalBitWeakening
  comult  := classicalBitContraction
  left_counit := classicalBitContraction_left_counit
  right_counit := classicalBitContraction_right_counit
  coassociative := classicalBitContraction_coassociative
  cocommutative := classicalBitContraction_cocommutative
```

### 5.3.82 Curry a morphism through the concrete Day closed structure

**Definition.** Curry a morphism through the concrete Day closed structure.

**Construction.** Defined to be `dayClosedPresentation.closed X A N f`.

**Lean 4 source** [QLambda/Linear/FragmentContextDay.lean](#)

```
noncomputable def dayCurry {X A N : Module}
  (f : Hom (dayTensor X A) N) :
  Hom X (dayInternalHom A N) :=
  dayClosedPresentation.closed X A N f
```

### 5.3.83 Evaluation for the concrete Day internal hom

**Definition.** Evaluation for the concrete Day internal hom.

**Construction.** Defined by an explicit formula built from the closed term and the Day internal morphism.

**Lean 4 source** [QLambda/Linear/FragmentContextDay.lean](#)

```
noncomputable def dayEval (A N : Module) :
  Hom (dayTensor (dayInternalHom A N) A) N :=
  (dayClosedPresentation.closed (dayInternalHom A N) A N).symm
  (Hom.id (dayInternalHom A N))
```

### 5.3.84 Uncurrying through Day closedness is evaluation after applying the curried map in the first Day factor

**Statement.** Uncurrying through Day closedness is evaluation after applying the curried map in the first Day factor. Formally:  $(\text{dayClosedPresentation.closed } X \ A \ N).symm \ g = \text{Hom.comp } (\text{dayEval } A \ N) \ (\text{DayTensor.map } g \ (\text{Hom.id } A))$ .

**Proof.** The key step rewrites with the components of the identity, the evaluation on an introduced element and the fact that extensionality for maps out of a Day tensor: it is enough to check coend generators.

### Lean 4 source `QLambda/Linear/FragmentContextDay.lean`

```
theorem dayUncurry_eq_eval_comp {X A N : Module}
  (g : Hom X (dayInternalHom A N)) :
  (dayClosedPresentation.closed X A N).symm g =
    Hom.comp (dayEval A N) (DayTensor.map g (Hom.id A)) := by
  apply DayTensor.hom_ext
  intro m n x y
  -- Both sides act on coend generators by `(g.app m x).app id y`.
  change
    ((dayClosedPresentation.closed X A N).symm g).app (m * n)
      ((DayCoend.intro X A).app x y) =
      (dayEval A N).app (m * n)
        ((DayTensor.map g (Hom.id A)).app (m * n)
          ((DayCoend.intro X A).app x y))
  have hmap := DayTensor.map_intro g (Hom.id A) x y
  rw [hmap, Hom.id_app]
  -- `closed.symm g = lift (uncurry g)` and `dayEval = lift (uncurry id)`.
  change
    DayCoend.evaluate N (DayInternalHom.uncurry g)
      ((DayCoend.intro X A).app x y) =
      DayCoend.evaluate N
        (DayInternalHom.uncurry (Hom.id (dayInternalHom A N)))
          ((DayCoend.intro (dayInternalHom A N) A).app (g.app m x) y)
  rw [DayCoend.evaluate_intro, DayCoend.evaluate_intro]
  rfl
```

#### 5.3.85 Day $\beta$ : evaluating a curried Day morphism recovers the original

**Statement.** Day  $\beta$ : evaluating a curried Day morphism recovers the original. Formally:  $\text{Hom.comp (dayEval A N) (DayTensor.map (dayCurry f) (Hom.id A))} = f$ .

**Proof.** The key step rewrites with the fact that uncurrying through Day closedness is evaluation after applying the curried map in the first Day factor.

### Lean 4 source `QLambda/Linear/FragmentContextDay.lean`

```
theorem dayEval_dayCurry {X A N : Module}
  (f : Hom (dayTensor X A) N) :
  Hom.comp (dayEval A N)
    (DayTensor.map (dayCurry f) (Hom.id A)) = f := by
  rw [ <- dayUncurry_eq_eval_comp ]
  exact (dayClosedPresentation.closed X A N).symm_apply_apply f
```

#### 5.3.86 Day $\eta$ : currying an evaluated Day morphism recovers the original

**Statement.** Day  $\eta$ : currying an evaluated Day morphism recovers the original. Formally:  $\text{dayCurry (Hom.comp (dayEval A N) (DayTensor.map g (Hom.id A)))} = g$ .

**Proof.** The key step rewrites with the fact that uncurrying through Day closedness is evaluation after applying the curried map in the first Day factor.

### Lean 4 source `QLambda/Linear/FragmentContextDay.lean`

```

theorem dayCurry_dayEval {X A N : Module}
  (g : Hom X (dayInternalHom A N)) :
  dayCurry
    (Hom.comp (dayEval A N) (DayTensor.map g (Hom.id A))) =
    g := by
  rw [ <- dayUncurry_eq_eval_comp ]
  exact (dayClosedPresentation.closed X A N).apply_symm_apply g

```

### 5.3.87 Definition of the currying first order of context interpretations

**Definition.** Curry over a first-order representable domain and transport to the specialized representable internal hom used by linear arrows.

**Construction.** Defined to be the composite of  $(\text{dayInternalHomRepresentableIso } A \ N) . \text{hom}$  after the Day currying of  $f$ .

**Lean 4 source** [QLambda/Linear/FragmentContextDay.lean](#)

```

noncomputable def curryFirstOrder {X N : Module} (A : Nat)
  (f : Hom (dayTensor X (representable A)) N) :
  Hom X (internalHomRepresentable A N) :=
  Hom.comp (dayInternalHomRepresentableIso A N).hom (dayCurry f)

```

### 5.3.88 Evaluation for the specialized representable internal hom

**Definition.** Evaluation for the specialized representable internal hom.

**Construction.** Defined to be the composite of the Day evaluation of  $\text{representable } A$  and  $N$  after the functorial action of  $(\text{dayInternalHomRepresentableIso } A \ N) . \text{inv}$  and  $\text{Hom.id } (\text{representable } A)$ .

**Lean 4 source** [QLambda/Linear/FragmentContextDay.lean](#)

```

noncomputable def evalFirstOrder (A : Nat) (N : Module) :
  Hom (dayTensor (internalHomRepresentable A N) (representable A)) N :=
  Hom.comp (dayEval (representable A) N)
    (map (dayInternalHomRepresentableIso A N).inv
      (Hom.id (representable A)))

```

### 5.3.89 First-order Day $\beta$ : evaluating a FO-curried morphism recovers the original

**Statement.** First-order Day  $\beta$ : evaluating a FO-curried morphism recovers the original. Formally:  $\text{Hom.comp } (\text{evalFirstOrder } d \ N) \ (\text{DayTensor.map } (\text{curryFirstOrder } d \ f) \ (\text{Hom.id } (\text{representable } d))) = f$ .

**Proof.** The key step rewrites with the fact that composition for module morphisms is associative, the fact that the identity is a left unit for composition for module morphisms, the definition of the evaluation first order and the definition of the currying first order.

**Lean 4 source** [QLambda/Linear/FragmentContextDay.lean](#)

```

theorem evalFirstOrder_curryFirstOrder (d : Nat) {X N : Module}
  (f : Hom (dayTensor X (representable d)) N) :
  Hom.comp (evalFirstOrder d N)
    (DayTensor.map (curryFirstOrder d f) (Hom.id (representable d))) = f := by
  unfold evalFirstOrder curryFirstOrder
  rw [ <- Hom.comp_assoc]
  have hmap :
    Hom.comp
      (DayTensor.map (dayInternalHomRepresentableIso d N).inv
        (Hom.id (representable d)))
      (DayTensor.map
        (Hom.comp (dayInternalHomRepresentableIso d N).hom (dayCurry f))
        (Hom.id (representable d))) =
    DayTensor.map
      (Hom.comp (dayInternalHomRepresentableIso d N).inv
        (Hom.comp (dayInternalHomRepresentableIso d N).hom (dayCurry f)))
      (Hom.id (representable d)) := by
  have h :=
    (DayTensor.map_comp
      (dayInternalHomRepresentableIso d N).inv
      (Hom.comp (dayInternalHomRepresentableIso d N).hom (dayCurry f))
      (Hom.id (representable d))
      (Hom.id (representable d))).symm
  simp only [Hom.comp_id] using h
  rw [hmap]
  have hiso :
    Hom.comp (dayInternalHomRepresentableIso d N).inv
      (Hom.comp (dayInternalHomRepresentableIso d N).hom (dayCurry f)) =
    dayCurry f := by
  rw [Hom.comp_assoc, (dayInternalHomRepresentableIso d N).inv_hom, Hom.id_comp]
  rw [hiso]
  exact dayEval_dayCurry f

```

### 5.3.90 $\lambda = \rho \circ \sigma$ as Fin equivalences on the unit factor

**Statement.**  $\lambda = \rho \circ \sigma$  as Fin equivalences on the unit factor.

**Proof.** Both sides are compared pointwise (by extensionality). The goal is simplified using the definition of the tensor left unitor, the definition of the tensor right unitor, the definition of the tensor swap and the map induced by an index equivalence of a composite for superoperators.

#### Lean 4 source `QLambda/Linear/FragmentContextDay.lean`

```

private theorem tensorLeftUnitor_eq_rightUnitor_swap (a : Nat) :
  Superoperator.comp (Superoperator.tensorRightUnitor a)
    (Superoperator.tensorSwap 1 a) =
  Superoperator.tensorLeftUnitor a := by
  simp only [Superoperator.tensorLeftUnitor, Superoperator.tensorRightUnitor,
    Superoperator.tensorSwap, Superoperator.ofEquivalence_comp]
  congr 1
  ext x
  simp [Superoperator.tensorLeftUnitorEquiv,
    Superoperator.tensorRightUnitorEquiv, Superoperator.tensorSwapEquiv]

```

### 5.3.91 Left and right unitors agree after braiding the unit past A

**Statement.** Left and right unitors agree after braiding the unit past A. Formally:  $\text{Hom.comp (rightUnitor A) (braiding dayTensorUnit A) = leftUnitor A}$ .

**Proof.** The claim follows from a chain of equalities (or inequalities). The key step rewrites with the braiding on an introduced element, the right unitor on an introduced element, the left unitor on an introduced element and the fact that composition for superoperators is associative.

#### Lean 4 source `QLambda/Linear/FragmentContextDay.lean`

```
theorem rightUnitor_comp_braiding (A : Module) :
  Hom.comp (rightUnitor A) (braiding dayTensorUnit A) =
    leftUnitor A := by
  apply DayTensor.hom_ext
  intro m n q x
  change
    (rightUnitor A).app (m * n)
      ((braiding dayTensorUnit A).app (m * n)
        ((DayCoend.intro dayTensorUnit A).app q x)) =
    (leftUnitor A).app (m * n)
      ((DayCoend.intro dayTensorUnit A).app q x)
  rw [braiding_intro, (rightUnitor A).naturality]
  -- After naturality the intermediate fiber is indexed by `n * m`.
  rw [rightUnitor_intro (M := A) (m := n) (n := m) x q]
  rw [leftUnitor_intro (M := A) q x, A.act_comp]
  congr 1
  change Superoperator m 1 at q
  calc
    Superoperator.comp
      (Superoperator.comp (Superoperator.tensorRightUnitor n)
        (Superoperator.tensor (Superoperator.identity n) q))
      (Superoperator.tensorSwap m n) =
    Superoperator.comp (Superoperator.tensorRightUnitor n)
      (Superoperator.comp
        (Superoperator.tensor (Superoperator.identity n) q)
        (Superoperator.tensorSwap m n)) := by
  rw [Superoperator.comp_assoc]
  _ = Superoperator.comp (Superoperator.tensorRightUnitor n)
    (Superoperator.comp (Superoperator.tensorSwap 1 n)
      (Superoperator.tensor q (Superoperator.identity n))) := by
  rw [ <- Superoperator.tensorSwap_naturality]
  _ = Superoperator.comp
    (Superoperator.comp (Superoperator.tensorRightUnitor n)
      (Superoperator.tensorSwap 1 n))
    (Superoperator.tensor q (Superoperator.identity n)) := by
  rw [ <- Superoperator.comp_assoc]
  _ = Superoperator.comp (Superoperator.tensorLeftUnitor n)
    (Superoperator.tensor q (Superoperator.identity n)) := by
  rw [tensorLeftUnitor_eq_rightUnitor_swap]
```

### 5.3.92 Cancel $\rho \circ \lambda^{-1}$ on the Day unit

**Statement.** Cancel  $\rho \circ \lambda^{-1}$  on the Day unit. Formally:  $\text{Hom.comp (rightUnitor dayTensorUnit) (leftUnitorInv dayTensorUnit) = Hom.id dayTensorUnit}$ .

**Proof.** The key step rewrites with the fact that the left unitor of the unit equals the right unitor of the unit and the fact that the left unitor and its inverse compose to the identity.

**Lean 4 source** `QLambda/Linear/FragmentContextDay.lean`

```
theorem rightUnitor_comp_leftUnitorInv_unit :
  Hom.comp (rightUnitor dayTensorUnit) (leftUnitorInv dayTensorUnit) =
    Hom.id dayTensorUnit := by
  rw [ <- leftUnitor_unit_eq_rightUnitor_unit, leftUnitor_hom_inv]
```

### 5.3.93 Reorder $(U \otimes L) \otimes A$ to $U \otimes (A \otimes L)$

**Definition.** Reorder  $(U \otimes L) \otimes A$  to  $U \otimes (A \otimes L)$ .

**Construction.** Defined to be the composite of the functorial action of `Hom.id U` and braiding `L` `A` after the associator of `U`, `L`, `A`.

**Lean 4 source** `QLambda/Linear/FragmentContextDay.lean`

```
noncomputable def moveArgumentIntoLinear (U L A : Module) :
  Hom (dayTensor (dayTensor U L) A) (dayTensor U (dayTensor A L)) :=
  Hom.comp (map (Hom.id U) (braiding L A)) (associator U L A)
```

### 5.3.94 Identity-body projection composed with move argument into linear reduces to $\lambda \circ (\rho \otimes \text{id})$

**Statement.** Identity-body projection composed with `moveArgumentIntoLinear` reduces to  $\lambda \circ (\rho \otimes \text{id})$ .

**Proof.** The key step rewrites with the fact that composition for module morphisms is associative, the fact that left and right unitors agree after braiding the unit past `A`, the definition of the move argument into linear and congruence of function application.

**Lean 4 source** `QLambda/Linear/FragmentContextDay.lean`

```
theorem identity_body_move_eq (A : Module) :
  Hom.comp
    (Hom.comp (leftUnitor A)
      (map (Hom.id dayTensorUnit) (rightUnitor A)))
    (moveArgumentIntoLinear dayTensorUnit dayTensorUnit A) =
  Hom.comp (leftUnitor A)
    (map (rightUnitor dayTensorUnit) (Hom.id A)) := by
  unfold moveArgumentIntoLinear
  have hmap :
    Hom.comp
      (map (Hom.id dayTensorUnit) (rightUnitor A))
      (map (Hom.id dayTensorUnit) (braiding dayTensorUnit A)) =
    map (Hom.id dayTensorUnit)
      (Hom.comp (rightUnitor A) (braiding dayTensorUnit A)) := by
  simp only [Hom.comp_id] using
    (DayTensor.map_comp (Hom.id dayTensorUnit) (Hom.id dayTensorUnit)
      (rightUnitor A) (braiding dayTensorUnit A)).symm
  rw [ <- Hom.comp_assoc (leftUnitor A), Hom.comp_assoc
    (map (Hom.id dayTensorUnit) (rightUnitor A)), hmap,
```

```

    rightUnitor_comp_braiding]
exact congrArg (Hom.comp (leftUnitor A)) (DayTensor.triangle dayTensorUnit A)

```

### 5.3.95 Reorder $(U \otimes L) \otimes A$ to $(A \otimes U) \otimes L$

**Definition.** Reorder  $(U \otimes L) \otimes A$  to  $(A \otimes U) \otimes L$ .

**Construction.** Defined by an explicit formula built from the composition, the functorial action, the braiding and the inverse associator.

#### Lean 4 source `QLambda/Linear/FragmentContextDay.lean`

```

noncomputable def moveArgumentIntoUnrestricted (U L A : Module) :
  Hom (dayTensor (dayTensor U L) A) (dayTensor (dayTensor A U) L) :=
  Hom.comp (map (braiding U A) (Hom.id L))
    (Hom.comp (associatorInv U A L)
      (Hom.comp (map (Hom.id U) (braiding L A))
        (associator U L A)))

```

### 5.3.96 Formula for the identity of the body of the unrestricted move

**Statement.** Identity unrestricted body composed with `moveArgumentIntoUnrestricted` reduces to  $\lambda \circ (\rho \otimes \text{id})$  (same residual as the linear identity move).

**Proof.** The claim follows from a chain of equalities (or inequalities). The key step rewrites with the fact that composition for module morphisms is associative, the fact that left and right unitors agree after braiding the unit past A, the definition of the move argument into unrestricted and congruence of function application.

#### Lean 4 source `QLambda/Linear/FragmentContextDay.lean`

```

theorem identity_body_unres_move_eq (A : Module) :
  Hom.comp
    (Hom.comp (rightUnitor A)
      (rightUnitor (dayTensor A dayTensorUnit)))
    (moveArgumentIntoUnrestricted dayTensorUnit dayTensorUnit A) =
  Hom.comp (leftUnitor A)
    (map (rightUnitor dayTensorUnit) (Hom.id A)) := by
  unfold moveArgumentIntoUnrestricted
  -- Goal shape after unfold:
  -- ? comp ?' comp (sigma ? id) comp a^-1 comp (id ? sigma) comp a = fun
  -- comp (? ? id)
  have h?sigma :
    Hom.comp (rightUnitor (dayTensor A dayTensorUnit))
      (map (braiding dayTensorUnit A) (Hom.id dayTensorUnit)) =
    Hom.comp (braiding dayTensorUnit A)
      (rightUnitor (dayTensor dayTensorUnit A)) :=
    rightUnitor_natural (braiding dayTensorUnit A)
  -- Collapse `? comp (sigma ? id)` against the outer right unitor.
  have h1 :
    Hom.comp (rightUnitor A)
      (Hom.comp (rightUnitor (dayTensor A dayTensorUnit))
        (map (braiding dayTensorUnit A) (Hom.id dayTensorUnit))) =
    Hom.comp (leftUnitor A)
      (rightUnitor (dayTensor dayTensorUnit A)) := by

```



```

calc
  Hom.comp (rightUnitor A)
    (Hom.comp (rightUnitor (dayTensor A dayTensorUnit))
      (map (braiding dayTensorUnit A) (Hom.id dayTensorUnit))) =
  Hom.comp (rightUnitor A)
    (Hom.comp (braiding dayTensorUnit A)
      (rightUnitor (dayTensor dayTensorUnit A))) := by
    exact congrArg (Hom.comp (rightUnitor A)) h?sigma
_ = Hom.comp
  (Hom.comp (rightUnitor A) (braiding dayTensorUnit A))
  (rightUnitor (dayTensor dayTensorUnit A)) := by
  exact Hom.comp_assoc _ _ _
_ = Hom.comp (leftUnitor A)
  (rightUnitor (dayTensor dayTensorUnit A)) := by
  exact congrArg
    (fun g => Hom.comp g
      (rightUnitor (dayTensor dayTensorUnit A))
      (rightUnitor_comp_braiding A))
-- Rewrite the outer `? comp ?' comp (sigma ? id)` block.
have h2 :
  Hom.comp
    (Hom.comp (rightUnitor A)
      (rightUnitor (dayTensor A dayTensorUnit)))
    (Hom.comp (map (braiding dayTensorUnit A) (Hom.id dayTensorUnit))
      (Hom.comp (associatorInv dayTensorUnit A dayTensorUnit)
        (Hom.comp (map (Hom.id dayTensorUnit) (braiding dayTensorUnit A))
          (associator dayTensorUnit dayTensorUnit A)))) =
  Hom.comp (leftUnitor A)
    (Hom.comp (rightUnitor (dayTensor dayTensorUnit A))
      (Hom.comp (associatorInv dayTensorUnit A dayTensorUnit)
        (Hom.comp (map (Hom.id dayTensorUnit) (braiding dayTensorUnit A))
          (associator dayTensorUnit dayTensorUnit A)))) := by
-- Reassociate to expose `? comp ?' comp (sigma ? id)`, then apply `h1`.
have hre :
  Hom.comp
    (Hom.comp (rightUnitor A)
      (rightUnitor (dayTensor A dayTensorUnit)))
    (Hom.comp (map (braiding dayTensorUnit A) (Hom.id dayTensorUnit))
      (Hom.comp (associatorInv dayTensorUnit A dayTensorUnit)
        (Hom.comp
          (map (Hom.id dayTensorUnit) (braiding dayTensorUnit A))
          (associator dayTensorUnit dayTensorUnit A)))) =
  Hom.comp
    (Hom.comp (rightUnitor A)
      (Hom.comp (rightUnitor (dayTensor A dayTensorUnit))
        (map (braiding dayTensorUnit A) (Hom.id dayTensorUnit))))
    (Hom.comp (associatorInv dayTensorUnit A dayTensorUnit)
      (Hom.comp (map (Hom.id dayTensorUnit) (braiding dayTensorUnit A))
        (associator dayTensorUnit dayTensorUnit A))) := by
  simp only [Hom.comp_assoc]
refine Eq.trans hre ?_
exact congrArg
  (fun g => Hom.comp g
    (Hom.comp (associatorInv dayTensorUnit A dayTensorUnit)
      (Hom.comp (map (Hom.id dayTensorUnit) (braiding dayTensorUnit A))
        (associator dayTensorUnit dayTensorUnit A))))

```

```

h1
refine Eq.trans h2 ?_
-- `? comp a^-1 = id ? ?`
have h?a := DayTensor.rightUnitor_associatorInv dayTensorUnit A
have h3 :
  Hom.comp (leftUnitor A)
    (Hom.comp (rightUnitor (dayTensor dayTensorUnit A))
      (Hom.comp (associatorInv dayTensorUnit A dayTensorUnit)
        (Hom.comp (map (Hom.id dayTensorUnit) (braiding dayTensorUnit A))
          (associator dayTensorUnit dayTensorUnit A)))) =
  Hom.comp (leftUnitor A)
    (Hom.comp (map (Hom.id dayTensorUnit) (rightUnitor A))
      (Hom.comp (map (Hom.id dayTensorUnit) (braiding dayTensorUnit A))
        (associator dayTensorUnit dayTensorUnit A)))) := by
have hre :
  Hom.comp (rightUnitor (dayTensor dayTensorUnit A))
    (Hom.comp (associatorInv dayTensorUnit A dayTensorUnit)
      (Hom.comp (map (Hom.id dayTensorUnit) (braiding dayTensorUnit A))
        (associator dayTensorUnit dayTensorUnit A)))) =
  Hom.comp
    (Hom.comp (rightUnitor (dayTensor dayTensorUnit A))
      (associatorInv dayTensorUnit A dayTensorUnit))
    (Hom.comp (map (Hom.id dayTensorUnit) (braiding dayTensorUnit A))
      (associator dayTensorUnit dayTensorUnit A)) := by
  simp only [Hom.comp_assoc]
refine congrArg (Hom.comp (leftUnitor A)) ?_
refine Eq.trans hre ?_
exact congrArg
  (fun g => Hom.comp g
    (Hom.comp (map (Hom.id dayTensorUnit) (braiding dayTensorUnit A))
      (associator dayTensorUnit dayTensorUnit A)))
h?a
refine Eq.trans h3 ?_
-- `(id ? ?) comp (id ? sigma) = id ? (? comp sigma) = id ? fun `
have hmapsigma :
  Hom.comp
    (map (Hom.id dayTensorUnit) (rightUnitor A))
    (map (Hom.id dayTensorUnit) (braiding dayTensorUnit A)) =
  map (Hom.id dayTensorUnit)
    (Hom.comp (rightUnitor A) (braiding dayTensorUnit A)) := by
  simp only [Hom.comp_id] using
    (DayTensor.map_comp (Hom.id dayTensorUnit) (Hom.id dayTensorUnit)
      (rightUnitor A) (braiding dayTensorUnit A)).symm
have h4 :
  Hom.comp (leftUnitor A)
    (Hom.comp (map (Hom.id dayTensorUnit) (rightUnitor A))
      (Hom.comp (map (Hom.id dayTensorUnit) (braiding dayTensorUnit A))
        (associator dayTensorUnit dayTensorUnit A)))) =
  Hom.comp (leftUnitor A)
    (Hom.comp
      (map (Hom.id dayTensorUnit)
        (Hom.comp (rightUnitor A) (braiding dayTensorUnit A)))
      (associator dayTensorUnit dayTensorUnit A)) := by
have hre :
  Hom.comp (map (Hom.id dayTensorUnit) (rightUnitor A))
    (Hom.comp (map (Hom.id dayTensorUnit) (braiding dayTensorUnit A))
      (associator dayTensorUnit dayTensorUnit A))

```

```

      (associator dayTensorUnit dayTensorUnit A)) =
Hom.comp
  (Hom.comp (map (Hom.id dayTensorUnit) (rightUnitor A))
    (map (Hom.id dayTensorUnit) (braiding dayTensorUnit A)))
  (associator dayTensorUnit dayTensorUnit A) := by
  simp only [Hom.comp_assoc]
  refine congrArg (Hom.comp (leftUnitor A)) ?_
  refine Eq.trans hre ?_
  exact congrArg (fun g => Hom.comp g
    (associator dayTensorUnit dayTensorUnit A)) hmapsigma
  refine Eq.trans h4 ?_
  rw [rightUnitor_comp_braiding]
  exact congrArg (Hom.comp (leftUnitor A))
    (DayTensor.triangle dayTensorUnit A)

```

### 5.3.97 Unrestricted abstraction over the genuine classical-bit carrier

**Definition.** Unrestricted abstraction over the genuine classical-bit carrier.

**Construction.** Defined by an explicit formula built from the Day currying, the composition, the move argument into unrestricted and the classical bit superoperator module.

**Lean 4 source** [QLambda/Linear/FragmentContextDay.lean](#)

```

noncomputable def abstractUnrestricted {U L N : Module}
  (body : Hom (dayTensor (dayTensor classicalBitModule U) L) N) :
  Hom (dayTensor U L) (dayInternalHom classicalBitModule N) :=
dayCurry
  (Hom.comp body
    (moveArgumentIntoUnrestricted U L classicalBitModule))

```

### 5.3.98 Definition of the transport along an equality morphism of context interpretations

**Definition.** The transport along an equality morphism is a module morphism from  $M$  to  $N$ .

**Construction.** Constructed interactively; an equation between variables is used to substitute one for the other. It follows from the definition of the identity.

**Lean 4 source** [QLambda/Linear/FragmentContextDay.lean](#)

```

private noncomputable def castHom {M N : Module} (h : M = N) : Hom M N := by
  subst N
  exact Hom.id M

```

### 5.3.99 Definition of the transport along an equality morphism inverse of context interpretations

**Definition.** The transport along an equality morphism inverse is a module morphism from  $N$  to  $M$ .

**Construction.** Constructed interactively; an equation between variables is used to substitute one for the other. It follows from the definition of the identity.

**Lean 4 source** [QLambda/Linear/FragmentContextDay.lean](#)

```
private noncomputable def castHomInv {M N : Module} (h : M = N) : Hom N M := by
  subst N
  exact Hom.id M
```

### 5.3.100 A first-order fragment object as its representing Yoneda module

**Definition.** A first-order fragment object as its representing Yoneda module.

**Construction.** Defined by an explicit formula built from the transport along an equality morphism, the dimension and the fragment superoperator module of first order.

**Lean 4 source** [QLambda/Linear/FragmentContextDay.lean](#)

```
noncomputable def firstOrderToRep {A : Ty} (hA : Ty.FirstOrder A) :
  Hom (fragmentModule A) (representable A.hilbertDim) :=
  castHom (by
    simp [Ty.FirstOrder.dimension] using fragmentModule_of_firstOrder hA)
```

### 5.3.101 Inverse representable transport for a first-order fragment object

**Definition.** Inverse representable transport for a first-order fragment object.

**Construction.** Defined by an explicit formula built from the transport along an equality morphism inverse, the dimension and the fragment superoperator module of first order.

**Lean 4 source** [QLambda/Linear/FragmentContextDay.lean](#)

```
noncomputable def firstOrderFromRep {A : Ty} (hA : Ty.FirstOrder A) :
  Hom (representable A.hilbertDim) (fragmentModule A) :=
  castHomInv (by
    simp [Ty.FirstOrder.dimension] using fragmentModule_of_firstOrder hA)
```

### 5.3.102 First order to representable of a composite of the from representable for context interpretations

**Statement.** For a type A: if A is a first-order type, then the composite of the first order to representable of hA after the first order from representable of hA equals the identity of the representable module of A.hilbertDim.

**Proof.** By case analysis on the derivation that A is a first-order type.

**Lean 4 source** [QLambda/Linear/FragmentContextDay.lean](#)

```
theorem firstOrderToRep_comp_fromRep {A : Ty} (hA : Ty.FirstOrder A) :
  Hom.comp (firstOrderToRep hA) (firstOrderFromRep hA) =
  Hom.id (representable A.hilbertDim) := by
  cases hA <|> rfl
```

### 5.3.103 First order from representable of a composite of the passage to representable for context interpretations

**Statement.** For a type A: if A is a first-order type, then the composite of the first order from representable of hA after the first order to representable of hA equals the identity of the fragment module of A.

**Proof.** By case analysis on the derivation that A is a first-order type.

**Lean 4 source** [QLambda/Linear/FragmentContextDay.lean](#)

```
theorem firstOrderFromRep_comp_toRep {A : Ty} (hA : Ty.FirstOrder A) :
  Hom.comp (firstOrderFromRep hA) (firstOrderToRep hA) =
    Hom.id (fragmentModule A) := by
  cases hA <;> rfl
```

### 5.3.104 Linear abstraction over a first-order representable domain

**Definition.** Linear abstraction over a first-order representable domain.

**Construction.** Constructed interactively; the argument proceeds by induction. The key step rewrites with the definition of the currying first order.

**Lean 4 source** [QLambda/Linear/FragmentContextDay.lean](#)

```
noncomputable def abstractLinear {U L N : Module} {A : Ty}
  (hA : Ty.FirstOrder A)
  (body : Hom (dayTensor U (dayTensor (fragmentModule A) L)) N) :
  Hom (dayTensor U L)
  (internalHomRepresentable A.hilbertDim N) := by
  have e : fragmentModule A = representable hA.dimension :=
    fragmentModule_of_firstOrder hA
  have hd : hA.dimension = A.hilbertDim := by
    induction hA <;> simp_all [Ty.FirstOrder.dimension, Ty.hilbertDim]
  rw [← hd]
  rw [e] at body
  exact curryFirstOrder hA.dimension
    (Hom.comp body
      (moveArgumentIntoLinear U L (representable hA.dimension)))
```

### 5.3.105 Evaluation specialized to a first-order source type

**Definition.** Evaluation specialized to a first-order source type.

**Construction.** Defined to be the composite of the evaluation first order of A.hilbertDim and N after the functorial action of Hom.id \_ and firstOrderToRep hA.

**Lean 4 source** [QLambda/Linear/FragmentContextDay.lean](#)

```
noncomputable def evalFragmentFirstOrder {A : Ty}
  (hA : Ty.FirstOrder A) (N : Module) :
  Hom
    (dayTensor (internalHomRepresentable A.hilbertDim N)
      (fragmentModule A)) N :=
  Hom.comp (evalFirstOrder A.hilbertDim N)
    (map (Hom.id _) (firstOrderToRep hA))
```

### 5.3.106 Abstract linear of a unit

**Statement.** For superoperator modules  $U, L, N$ , a module morphism  $\text{body}$ : the abstract linear of a unit and  $\text{body}$  equals the currying first order of the composite of  $\text{body}$  after  $\text{moveArgumentIntoLinear } U \ L$  ( $\text{representable } 1$ ) at 1.

**Proof.** By definition. Unfolding the abstract linear turns the left-hand side, the abstract linear of a unit and  $\text{body}$ , into the right-hand side, the currying first order of the composite of  $\text{body}$  after  $\text{moveArgumentIntoLinear } U \ L$  ( $\text{representable } 1$ ) at 1; the two sides are the same term.

#### Lean 4 source `QLambda/Linear/FragmentContextDay.lean`

```
@[simp] theorem abstractLinear_unit {U L N : Module}
  (body : Hom (dayTensor U (dayTensor (fragmentModule .unit) L)) N) :
  abstractLinear .unit body =
    curryFirstOrder 1
      (Hom.comp body (moveArgumentIntoLinear U L (representable 1))) :=
  rfl
```

### 5.3.107 Abstract linear of a bit

**Statement.** For superoperator modules  $U, L, N$ , a module morphism  $\text{body}$ : the abstract linear of a bit and  $\text{body}$  equals the currying first order of the composite of  $\text{body}$  after  $\text{moveArgumentIntoLinear } U \ L$  ( $\text{representable } 2$ ) at 2.

**Proof.** By definition. Unfolding the abstract linear turns the left-hand side, the abstract linear of a bit and  $\text{body}$ , into the right-hand side, the currying first order of the composite of  $\text{body}$  after  $\text{moveArgumentIntoLinear } U \ L$  ( $\text{representable } 2$ ) at 2; the two sides are the same term.

#### Lean 4 source `QLambda/Linear/FragmentContextDay.lean`

```
@[simp] theorem abstractLinear_bit {U L N : Module}
  (body : Hom (dayTensor U (dayTensor (fragmentModule .bit) L)) N) :
  abstractLinear .bit body =
    curryFirstOrder 2
      (Hom.comp body (moveArgumentIntoLinear U L (representable 2))) :=
  rfl
```

### 5.3.108 Abstract linear of a qubit

**Statement.** For superoperator modules  $U, L, N$ , a module morphism  $\text{body}$ : the abstract linear of a qubit and  $\text{body}$  equals the currying first order of the composite of  $\text{body}$  after  $\text{moveArgumentIntoLinear } U \ L$  ( $\text{representable } 2$ ) at 2.

**Proof.** By definition. Unfolding the abstract linear turns the left-hand side, the abstract linear of a qubit and  $\text{body}$ , into the right-hand side, the currying first order of the composite of  $\text{body}$  after  $\text{moveArgumentIntoLinear } U \ L$  ( $\text{representable } 2$ ) at 2; the two sides are the same term.

#### Lean 4 source `QLambda/Linear/FragmentContextDay.lean`

```
@[simp] theorem abstractLinear_qubit {U L N : Module}
  (body : Hom (dayTensor U (dayTensor (fragmentModule .qubit) L)) N) :
  abstractLinear .qubit body =
```

```

curryFirstOrder 2
  (Hom.comp body (moveArgumentIntoLinear U L (representable 2))) :=
rfl

```

### 5.3.109 Evaluation fragment first order of a unit

**Statement.** For a superoperator module  $N$ : the evaluation fragment first order of a unit and  $N$  equals the evaluation first order of  $N$  at 1.

**Proof.** The key step rewrites with the fact that the functorial action for Day tensor products preserves identities and the fact that the identity is a right unit for composition for module morphisms.

#### Lean 4 source `QLambda/Linear/FragmentContextDay.lean`

```

@[simp] theorem evalFragmentFirstOrder_unit (N : Module) :
  evalFragmentFirstOrder .unit N = evalFirstOrder 1 N := by
  change Hom.comp (evalFirstOrder 1 N)
    (DayTensor.map (Hom.id _) (Hom.id (representable 1))) =
  evalFirstOrder 1 N
  rw [DayTensor.map_id, Hom.comp_id]

```

### 5.3.110 Evaluation fragment first order of a bit

**Statement.** For a superoperator module  $N$ : the evaluation fragment first order of a bit and  $N$  equals the evaluation first order of  $N$  at 2.

**Proof.** The key step rewrites with the fact that the functorial action for Day tensor products preserves identities and the fact that the identity is a right unit for composition for module morphisms.

#### Lean 4 source `QLambda/Linear/FragmentContextDay.lean`

```

@[simp] theorem evalFragmentFirstOrder_bit (N : Module) :
  evalFragmentFirstOrder .bit N = evalFirstOrder 2 N := by
  change Hom.comp (evalFirstOrder 2 N)
    (DayTensor.map (Hom.id _) (Hom.id (representable 2))) =
  evalFirstOrder 2 N
  rw [DayTensor.map_id, Hom.comp_id]

```

### 5.3.111 Evaluation fragment first order of a qubit

**Statement.** For a superoperator module  $N$ : the evaluation fragment first order of a qubit and  $N$  equals the evaluation first order of  $N$  at 2.

**Proof.** The key step rewrites with the fact that the functorial action for Day tensor products preserves identities and the fact that the identity is a right unit for composition for module morphisms.

#### Lean 4 source `QLambda/Linear/FragmentContextDay.lean`

```

@[simp] theorem evalFragmentFirstOrder_qubit (N : Module) :
  evalFragmentFirstOrder .qubit N = evalFirstOrder 2 N := by
  change Hom.comp (evalFirstOrder 2 N)
    (DayTensor.map (Hom.id _) (Hom.id (representable 2))) =
  evalFirstOrder 2 N

```

```
rw [DayTensor.map_id, Hom.comp_id]
```

### 5.3.112 Fragment Day $\beta$ : evaluating an FO-abstracted body recovers the moved body

**Statement.** Fragment Day  $\beta$ : evaluating an FO-abstracted body recovers the moved body.

**Proof.** By case analysis on the derivation that A is a first-order type. For a unit, a bit, a qubit and a tensor product, the claim is checked directly. The key step rewrites with the evaluation fragment first order of a unit, the abstract linear of a unit, the evaluation fragment first order of a bit and the abstract linear of a bit.

#### Lean 4 source `QLambda/Linear/FragmentContextDay.lean`

```
theorem evalFragmentFirstOrder_abstractLinear {U L N : Module} {A : Ty}
  (hA : Ty.FirstOrder A)
  (body : Hom (dayTensor U (dayTensor (fragmentModule A) L)) N) :
  Hom.comp (evalFragmentFirstOrder hA N)
    (DayTensor.map (abstractLinear hA body) (Hom.id (fragmentModule A))) =
  Hom.comp body (moveArgumentIntoLinear U L (fragmentModule A)) := by
cases hA with
| unit =>
  simp only [evalFragmentFirstOrder_unit, abstractLinear_unit]
  exact evalFirstOrder_curryFirstOrder 1 _
| bit =>
  simp only [evalFragmentFirstOrder_bit, abstractLinear_bit]
  exact evalFirstOrder_curryFirstOrder 2 _
| qubit =>
  simp only [evalFragmentFirstOrder_qubit, abstractLinear_qubit]
  exact evalFirstOrder_curryFirstOrder 2 _
| @tensor A B hA hB =>
  have hAbs :
    abstractLinear (.tensor hA hB) body =
      curryFirstOrder (A.hilbertDim * B.hilbertDim)
        (Hom.comp body
          (moveArgumentIntoLinear U L
            (representable (A.hilbertDim * B.hilbertDim)))) :=
    rfl
  have hEv :
    evalFragmentFirstOrder (.tensor hA hB) N =
      evalFirstOrder (A.hilbertDim * B.hilbertDim) N := by
    change Hom.comp (evalFirstOrder (A.hilbertDim * B.hilbertDim) N)
      (DayTensor.map (Hom.id _)
        (Hom.id (representable (A.hilbertDim * B.hilbertDim)))) =
      evalFirstOrder (A.hilbertDim * B.hilbertDim) N
  rw [DayTensor.map_id, Hom.comp_id]
  simp only [hAbs, hEv]
  exact evalFirstOrder_curryFirstOrder (A.hilbertDim * B.hilbertDim) _
```

### 5.3.113 Evaluation of an unrestricted function after classicalizing its physical term-level bit argument

**Definition.** Evaluation of an unrestricted function after classicalizing its physical term-level bit argument.

**Construction.** Defined to be the composite of the Day evaluation of `classicalBitModule` and `N` after the functorial action of `Hom.id _` and `bitClassicalize`.



### Lean 4 source `QLambda/Linear/FragmentContextDay.lean`

```
noncomputable def evalUnrestrictedBit (N : Module) :
  Hom
    (dayTensor (dayInternalHom classicalBitModule N)
      (fragmentModule .bit)) N :=
  Hom.comp (dayEval classicalBitModule N)
    (map (Hom.id _) bitClassicalize)
```

#### 5.3.114 Evaluation unrestricted bit of the abstract unrestricted for context interpretations

**Statement.** Unrestricted Day  $\beta$ : evaluating an abstracted body recovers the moved body after classicalizing the physical bit argument.

**Proof.** The key step rewrites with the fragment module of a bit, the fact that composition for module morphisms is associative, the definition of the evaluation unrestricted bit and the definition of the abstract unrestricted.

### Lean 4 source `QLambda/Linear/FragmentContextDay.lean`

```
theorem evalUnrestrictedBit_abstractUnrestricted {U L N : Module}
  (body : Hom (dayTensor (dayTensor classicalBitModule U) L) N) :
  Hom.comp (evalUnrestrictedBit N)
    (DayTensor.map (abstractUnrestricted body)
      (Hom.id (fragmentModule .bit))) =
  Hom.comp body
    (Hom.comp (moveArgumentIntoUnrestricted U L classicalBitModule)
      (DayTensor.map (Hom.id (dayTensor U L)) bitClassicalize)) := by
  unfold evalUnrestrictedBit abstractUnrestricted
  -- Align `fragmentModule .bit` with the stated domain of `bitClassicalize`.
  simp only [fragmentModule_bit]
  have hmap :
    Hom.comp
      (DayTensor.map (Hom.id (dayInternalHom classicalBitModule N))
        bitClassicalize)
      (DayTensor.map (dayCurry
        (Hom.comp body
          (moveArgumentIntoUnrestricted U L classicalBitModule)))
        (Hom.id (representable 2))) =
    DayTensor.map
      (dayCurry
        (Hom.comp body
          (moveArgumentIntoUnrestricted U L classicalBitModule)))
        bitClassicalize := by
  simp only [Hom.id_comp, Hom.comp_id] using
    (DayTensor.map_comp
      (Hom.id (dayInternalHom classicalBitModule N))
      (dayCurry
        (Hom.comp body
          (moveArgumentIntoUnrestricted U L classicalBitModule)))
        bitClassicalize
        (Hom.id (representable 2))).symm
  rw [ <- Hom.comp_assoc, hmap]
  have hfactor :
    DayTensor.map
```

```

      (dayCurry
        (Hom.comp body
          (moveArgumentIntoUnrestricted U L classicalBitModule)))
    bitClassicalize =
Hom.comp
  (DayTensor.map
    (dayCurry
      (Hom.comp body
        (moveArgumentIntoUnrestricted U L classicalBitModule)))
      (Hom.id classicalBitModule))
    (DayTensor.map (Hom.id (dayTensor U L)) bitClassicalize) := by
simp only [Hom.comp_id, Hom.id_comp] using
  DayTensor.map_comp
    (dayCurry
      (Hom.comp body
        (moveArgumentIntoUnrestricted U L classicalBitModule)))
    (Hom.id (dayTensor U L))
    (Hom.id classicalBitModule)
  bitClassicalize
rw [hfactor]
-- `Hom.comp` is definitionally associative, so Day b applies under postcomposition.
exact congrArg (fun g => Hom.comp g
  (DayTensor.map (Hom.id (dayTensor U L)) bitClassicalize))
  (dayEval_dayCurry _)

```

### 5.3.115 Pair introduction for first-order fragment objects

**Definition.** Pair introduction for first-order fragment objects.

**Construction.** Defined by an explicit formula built from the composition, the first order from representable, the tensor product and the Day tensor product representable isomorphism.

**Lean 4 source** [QLambda/Linear/FragmentContextDay.lean](#)

```

noncomputable def tensorIntro {A B : Ty}
  (hA : Ty.FirstOrder A) (hB : Ty.FirstOrder B) :
  Hom (dayTensor (fragmentModule A) (fragmentModule B))
    (fragmentModule (.tensor A B)) :=
Hom.comp (firstOrderFromRep (Ty.FirstOrder.tensor hA hB))
  (Hom.comp
    (dayTensorRepresentableIso A.hilbertDim B.hilbertDim).hom
    (map (firstOrderToRep hA) (firstOrderToRep hB)))

```

### 5.3.116 Pair elimination for first-order fragment objects

**Definition.** Pair elimination for first-order fragment objects.

**Construction.** Defined by an explicit formula built from the composition, the functorial action, the first order from representable and the Day tensor product representable isomorphism.

**Lean 4 source** [QLambda/Linear/FragmentContextDay.lean](#)

```

noncomputable def tensorElim {A B : Ty}
  (hA : Ty.FirstOrder A) (hB : Ty.FirstOrder B) :

```

```

Hom (fragmentModule (.tensor A B))
  (dayTensor (fragmentModule A) (fragmentModule B)) :=
Hom.comp (map (firstOrderFromRep hA) (firstOrderFromRep hB))
  (Hom.comp
    (dayTensorRepresentableIso A.hilbertDim B.hilbertDim).inv
    (firstOrderToRep (Ty.FirstOrder.tensor hA hB)))

```

### 5.3.117 Apply a curried two-argument continuation to an unpacked first-order tensor, preserving source order

**Definition.** Apply a curried two-argument continuation to an unpacked first-order tensor, preserving source order.

**Construction.** Defined by an explicit formula built from the composition, the evaluation fragment first order, the functorial action and the internal morphism representable.

#### Lean 4 source `QLambda/Linear/FragmentContextDay.lean`

```

noncomputable def unpairApply {A B : Ty}
  (hA : Ty.FirstOrder A) (hB : Ty.FirstOrder B) (N : Module) :
Hom
  (dayTensor (fragmentModule (.tensor A B))
    (internalHomRepresentable A.hilbertDim
      (internalHomRepresentable B.hilbertDim N)))
  N :=
Hom.comp (evalFragmentFirstOrder hB N)
  (Hom.comp
    (map
      (evalFragmentFirstOrder hA
        (internalHomRepresentable B.hilbertDim N))
      (Hom.id (fragmentModule B)))
    (Hom.comp
      (associatorInv
        (internalHomRepresentable A.hilbertDim
          (internalHomRepresentable B.hilbertDim N))
        (fragmentModule A) (fragmentModule B))
      (Hom.comp
        (map (Hom.id _) (tensorElim hA hB))
        (braiding (fragmentModule (.tensor A B))
          (internalHomRepresentable A.hilbertDim
            (internalHomRepresentable B.hilbertDim N)))))))

```

### 5.3.118 Unrestricted context object

**Definition.** Unrestricted context object. Route A admits only bit binders here; the total definition uses the classical-bit carrier for every list cell, and all public structural maps require `CtxUAllBit`.

**Construction.** Defined by cases on the input:  $[] \mapsto$  the Day tensor unit;  $\_ : \Gamma \mapsto$  the Day tensor product of the classical bit superoperator module and the unrestricted of  $\Gamma$ .

#### Lean 4 source `QLambda/Linear/FragmentContextObjects.lean`

```

noncomputable def unrestricted : List Ty -> Module
| [] => dayTensorUnit

```

```
| _ :: Gamma => dayTensor classicalBitModule (unrestricted Gamma)
```

### 5.3.119 Linear context object; absent cells are tensor units

**Definition.** Linear context object; absent cells are tensor units.

**Construction.** Defined by cases on the input:  $[] \mapsto$  the Day tensor unit;  $\text{none} :: \Delta \mapsto$  the Day tensor product of the Day tensor unit and the linear of  $\Delta$ ;  $\text{some } A :: \Delta \mapsto$  the Day tensor product of the fragment module of  $A$  and the linear of  $\Delta$ .

**Lean 4 source** [QLambda/Linear/FragmentContextObjects.lean](#)

```
noncomputable def linear : List (Option Ty) -> Module
| [] => dayTensorUnit
| none :: Delta => dayTensor dayTensorUnit (linear Delta)
| some A :: Delta => dayTensor (fragmentModule A) (linear Delta)
```

### 5.3.120 Combined context $[\Gamma] \otimes [\Delta]$

**Definition.** Combined context  $[\Gamma] \otimes [\Delta]$ .

**Construction.** Defined to be the Day tensor product of the unrestricted of  $\Gamma$  and the linear of  $\Delta$ .

**Lean 4 source** [QLambda/Linear/FragmentContextObjects.lean](#)

```
noncomputable def combined (Gamma : List Ty) (Delta : List (Option Ty)) : Module :=
  dayTensor (unrestricted Gamma) (linear Delta)
```

### 5.3.121 Unrestricted empty list for context interpretations

**Statement.** The unrestricted of  $[]$  equals the Day tensor unit. Formally:  $\text{unrestricted } [] = \text{dayTensorUnit}$ .

**Proof.** By definition. The left-hand side is the unrestricted of  $[]$ ; the unrestricted is defined by cases, and its defining clause for a  $[]$  returns the Day tensor unit, which is literally the right-hand side. No computation beyond unfolding this clause is needed.

**Lean 4 source** [QLambda/Linear/FragmentContextObjects.lean](#)

```
@[simp] theorem unrestricted_nil : unrestricted [] = dayTensorUnit := rfl
```

### 5.3.122 Linear empty list for context interpretations

**Statement.** The linear of  $[]$  equals the Day tensor unit. Formally:  $\text{linear } [] = \text{dayTensorUnit}$ .

**Proof.** By definition. The left-hand side is the linear of  $[]$ ; the linear is defined by cases, and its defining clause for a  $[]$  returns the Day tensor unit, which is literally the right-hand side. No computation beyond unfolding this clause is needed.

**Lean 4 source** [QLambda/Linear/FragmentContextObjects.lean](#)

```
@[simp] theorem linear_nil : linear [] = dayTensorUnit := rfl
```

### 5.3.123 Combined empty list of the empty list for context interpretations

**Statement.** The combined of  $[]$  equals the Day tensor product of the Day tensor unit.

**Proof.** By definition. Unfolding the combined turns the left-hand side, the combined of  $[]$ , into the right-hand side, the Day tensor product of the Day tensor unit; the two sides are the same term.

**Lean 4 source** [QLambda/Linear/FragmentContextObjects.lean](#)

```
theorem combined_nil_nil :  
  combined [] [] = dayTensor dayTensorUnit dayTensorUnit :=  
  rfl
```

### 5.3.124 Identity on a combined context

**Definition.** Identity on a combined context.

**Construction.** Defined to be the identity of  $\_$ .

**Lean 4 source** [QLambda/Linear/FragmentContextObjects.lean](#)

```
noncomputable def combinedId (Gamma : List Ty) (Delta : List (Option Ty)) :  
  Hom (combined Gamma Delta) (combined Gamma Delta) :=  
  Hom.id _
```

### 5.3.125 Bifunctorial action on combined contexts

**Definition.** Bifunctorial action on combined contexts.

**Construction.** Defined to be the functorial action of  $f$  and  $g$ .

**Lean 4 source** [QLambda/Linear/FragmentContextObjects.lean](#)

```
noncomputable def combinedMap {Gamma Gamma' : List Ty} {Delta Delta' : List (Option Ty)}  
  (f : Hom (unrestricted Gamma) (unrestricted Gamma'))  
  (g : Hom (linear Delta) (linear Delta')) :  
  Hom (combined Gamma Delta) (combined Gamma' Delta') :=  
  map f g
```

### 5.3.126 Discard an unrestricted context whose entries are all classical bits

**Definition.** Discard an unrestricted context whose entries are all classical bits.

**Construction.** Constructed interactively; by induction on the unrestricted context  $\Gamma$ . For the empty context, the claim is checked directly; for a context extended by one cell, the claim follows from the induction hypothesis. It follows from the definition of the identity, the hypothesis that every unrestricted variable of  $\Gamma$  has bit type and the definition of the composition.

**Lean 4 source** [QLambda/Linear/FragmentContextObjects.lean](#)

```
noncomputable def unrestrictedAllBitDiscard {Gamma : List Ty}  
  (hGamma : CtxUAllBit Gamma) : Hom (unrestricted Gamma) dayTensorUnit := by  
  induction Gamma with
```

```

| nil =>
  exact Hom.id dayTensorUnit
| cons A Gamma ih =>
  have hA : A = .bit := hGamma (List.Mem.head _)
  have htail : CtxUAllBit Gamma := by
    intro B hm
    exact hGamma (List.Mem.tail _ hm)
  subst A
  exact Hom.comp (leftUnitor dayTensorUnit)
    (map classicalBitWeakening (ih htail))

```

### 5.3.127 Existence of lookup from a classical-bit unrestricted context

**Statement.** Existence of lookup from a classical-bit unrestricted context. Formally:  $\text{Nonempty } (\text{Hom } (\text{unrestricted } \Gamma) (\text{fragmentModule } A))$ .

**Proof.** By case analysis on the unrestricted context  $\Gamma$ . The case of the empty context cannot occur, since it contradicts the hypothesis that position  $n$  of  $\Gamma$  holds  $A$ ; for a context extended by one cell, the claim is checked directly. It follows from the hypothesis that every unrestricted variable of  $\Gamma$  has bit type.

#### Lean 4 source `QLambda/Linear/FragmentContextObjects.lean`

```

theorem unrestrictedLookup_exists {Gamma : List Ty} {n : Nat} {A : Ty}
  (hGamma : CtxUAllBit Gamma) (hl : Lookup Gamma n A) :
  Nonempty (Hom (unrestricted Gamma) (fragmentModule A)) := by
cases Gamma with
| nil => cases hl
| cons B Gamma =>
  have hhead : B = .bit := hGamma (List.Mem.head _)
  have htail : CtxUAllBit Gamma := by
    intro C hm
    exact hGamma (List.Mem.tail _ hm)
  cases n with
  | zero =>
    cases hl
    subst A
    exact <Hom.comp (rightUnitor (fragmentModule .bit))
      (map classicalBitInclusion
        (unrestrictedAllBitDiscard htail))>
  | succ n =>
    cases hl with
    | succ hl =>
      subst B
      obtain <f> := unrestrictedLookup_exists htail hl
      exact <Hom.comp (leftUnitor (fragmentModule A))
        (map classicalBitWeakening f)>
termination_by Gamma.length

```

### 5.3.128 Structural discard of an all-bit unrestricted context

**Definition.** Structural discard of an all-bit unrestricted context.

**Construction.** Defined by cases on the input:  $[] \mapsto$  the identity of the Day tensor unit;  $\_ : : \Gamma \mapsto$  the composition of the left unitor of `dayTensorUnit`.

### Lean 4 source `QLambda/Linear/FragmentContextObjects.lean`

```
noncomputable def unrestrictedAllBitDiscardLists :
  forall (Gamma : List Ty), Hom (unrestricted Gamma) dayTensorUnit
| [] => Hom.id dayTensorUnit
| _ :: Gamma =>
  Hom.comp (leftUnitor dayTensorUnit)
    (map classicalBitWeakening (unrestrictedAllBitDiscardLists Gamma))
```

#### 5.3.129 Unrestricted all bit discard lists of the empty list for context interpretations

**Statement.** The unrestricted all bit discard lists of `[]` equals the identity of the Day tensor unit.

**Proof.** By definition. The left-hand side is the unrestricted all bit discard lists of `[]`; the unrestricted all bit discard lists is defined by cases, and its defining clause for a `[]` returns the identity of the Day tensor unit, which is literally the right-hand side. No computation beyond unfolding this clause is needed.

### Lean 4 source `QLambda/Linear/FragmentContextObjects.lean`

```
theorem unrestrictedAllBitDiscardLists_nil :
  unrestrictedAllBitDiscardLists [] = Hom.id dayTensorUnit :=
  rfl
```

#### 5.3.130 Structural unrestricted lookup (computes without eliminating context lookup / all-bit unrestricted context)

**Definition.** Structural unrestricted lookup (computes without eliminating `Lookup / CtxUAllBit : Prop`). Impossible shapes return 0.

**Construction.** Defined by cases on the input: `[], _, _ ↦ 0; _ :: Γ, 0, A ↦ if h : A = .bit then by; _ :: Γ, n + 1, A ↦ the composition of the left unitor of fragmentModule A.`

### Lean 4 source `QLambda/Linear/FragmentContextObjects.lean`

```
noncomputable def unrestrictedLookupLists :
  forall (Gamma : List Ty) (_n : Nat) (A : Ty),
    Hom (unrestricted Gamma) (fragmentModule A)
| [], _, _ => 0
| _ :: Gamma, 0, A =>
  if h : A = .bit then by
    subst A
    exact Hom.comp (rightUnitor (fragmentModule .bit))
      (map classicalBitInclusion
        (unrestrictedAllBitDiscardLists Gamma))
  else
    0
| _ :: Gamma, n + 1, A =>
  Hom.comp (leftUnitor (fragmentModule A))
    (map classicalBitWeakening (unrestrictedLookupLists Gamma n A))
```

### 5.3.131 Unrestricted context lookup lists of zero of the bit for context interpretations

**Statement.** For an unrestricted context  $\Gamma$ : the unrestricted context lookup lists of the bit of  $::$  and  $\Gamma$  and a bit at 0 equals the composite of the right unitor of `fragmentModule .bit` after the functorial action of `classicalBitInclusion` and `unrestrictedAllBitDiscardLists`  $\Gamma$ .

**Proof.** The goal is simplified using the definition of the unrestricted context lookup lists.

**Lean 4 source** `QLambda/Linear/FragmentContextObjects.lean`

```
theorem unrestrictedLookupLists_zero_bit (Gamma : List Ty) :
  unrestrictedLookupLists (.bit :: Gamma) 0 .bit =
    Hom.comp (rightUnitor (fragmentModule .bit))
      (map classicalBitInclusion
        (unrestrictedAllBitDiscardLists Gamma)) := by
  simp only [unrestrictedLookupLists]
  rfl
```

### 5.3.132 Select an unrestricted bit variable, weakening every other bit entry

**Definition.** Select an unrestricted bit variable, weakening every other bit entry.

**Construction.** Defined to be the unrestricted context lookup lists of  $\Gamma$ ,  $n$ ,  $A$ .

**Lean 4 source** `QLambda/Linear/FragmentContextObjects.lean`

```
noncomputable def unrestrictedLookup {Gamma : List Ty} {n : Nat} {A : Ty}
  (_hGamma : CtxUAllBit Gamma) (_hl : Lookup Gamma n A) :
  Hom (unrestricted Gamma) (fragmentModule A) :=
  unrestrictedLookupLists Gamma n A
```

### 5.3.133 Collapse the empty combined context to the Day unit

**Definition.** Collapse the empty combined context to the Day unit.

**Construction.** Defined to be the composite of the left unitor of `dayTensorUnit` after the functorial action of `Hom.id dayTensorUnit`.

**Lean 4 source** `QLambda/Linear/FragmentContextObjects.lean`

```
noncomputable def combinedClosedCollapse :
  Hom (combined [] []) dayTensorUnit :=
  Hom.comp (leftUnitor dayTensorUnit)
    (map (Hom.id dayTensorUnit) (Hom.id dayTensorUnit))
```

### 5.3.134 Closed observation from a Day-unit point

**Definition.** Closed observation from a Day-unit point.

**Construction.** Defined to be the composite of `f` after the combined closed term collapse.

**Lean 4 source** `QLambda/Linear/FragmentContextObjects.lean`



```

noncomputable def closedPoint {A : Module}
  (f : Hom dayTensorUnit A) : Hom (combined [] []) A :=
  Hom.comp f combinedClosedCollapse

```

### 5.3.135 Insert a leading none on the linear context

**Definition.** Insert a leading none on the linear context.

**Construction.** Defined to be the composite of the functorial action of  $\text{Hom.id dayTensorUnit}$  and  $\text{Hom.id (linear } \Delta)$  after the inverse left unitor of  $\text{linear } \Delta$ .

**Lean 4 source** [QLambda/Linear/FragmentContextObjects.lean](#)

```

noncomputable def linearConsNone (Delta : List (Option Ty)) :
  Hom (linear Delta) (linear (none :: Delta)) :=
  Hom.comp (map (Hom.id dayTensorUnit) (Hom.id (linear Delta)))
  (leftUnitorInv (linear Delta))

```

### 5.3.136 Collapse a linear context known to contain no resources

**Definition.** Collapse a linear context known to contain no resources.

**Construction.** Constructed interactively; by induction on the linear context  $\Delta$ . For the empty context, the claim is checked directly; for a context extended by one cell, the claim follows from the induction hypothesis. The goal is simplified using the definition of the empty usage mask, the definition of the identity and the definition of the composition.

**Lean 4 source** [QLambda/Linear/FragmentContextObjects.lean](#)

```

noncomputable def linearAllNoneCollapse {Delta : List (Option Ty)}
  (h : AllNone Delta) : Hom (linear Delta) dayTensorUnit := by
  induction Delta with
  | nil =>
    exact Hom.id dayTensorUnit
  | cons cell Delta ih =>
    cases cell with
    | none =>
      simp only [AllNone] at h
      exact Hom.comp (leftUnitor dayTensorUnit)
        (map (Hom.id dayTensorUnit) (ih h))
    | some A =>
      simp [AllNone] at h

```

### 5.3.137 Structural all-none collapse on the underlying list (computes without eliminating empty usage mask)

**Definition.** Structural all-none collapse on the underlying list (computes without eliminating `AllNone` : `Prop`). Impossible shapes return 0.

**Construction.** Defined by cases on the input: `[]`  $\mapsto$  the identity of the Day tensor unit; `none :: Δ`  $\mapsto$  the composition of the left unitor of `dayTensorUnit`; `some _ :: _`  $\mapsto$  0.

**Lean 4 source** [QLambda/Linear/FragmentContextObjects.lean](#)

```

noncomputable def linearAllNoneCollapseLists :
  forall (Delta : List (Option Ty)), Hom (linear Delta) dayTensorUnit
| [] => Hom.id dayTensorUnit
| none :: Delta =>
  Hom.comp (leftUnitor dayTensorUnit)
    (map (Hom.id dayTensorUnit) (linearAllNoneCollapseLists Delta))
| some _ :: _ => 0

```

### 5.3.138 Definition of the linear only some at project lists of context interpretations

**Definition.** Structural projection from a uniquely occupied linear cell (computes without eliminating Lookup/OnlySomeAt : Prop). Impossible shapes return 0.

**Construction.** Defined by cases on the input: [],  $\_$ ,  $\_ \mapsto 0$ ; some  $B :: \Delta$ , 0,  $A \mapsto$  if  $h : B = A$  then by; none  $:: \Delta$ ,  $n + 1$ ,  $A \mapsto$  the composition of the left unitor of fragment Module  $A$ ; some  $\_ :: \_$ ,  $\_ + 1$ ,  $\_ \mapsto 0$ ; none  $:: \_$ , 0,  $\_ \mapsto 0$ .

#### Lean 4 source QLambda/Linear/FragmentContextObjects.lean

```

noncomputable def linearOnlySomeAtProjectLists :
  forall (Delta : List (Option Ty)) (_n : Nat) (A : Ty),
  Hom (linear Delta) (fragmentModule A)
| [],  $\_$ ,  $\_ \mapsto 0$ 
| some B :: Delta, 0, A =>
  if h : B = A then by
    subst A
    exact Hom.comp (rightUnitor (fragmentModule B))
      (map (Hom.id (fragmentModule B))
        (linearAllNoneCollapseLists Delta))
  else
    0
| none :: Delta, n + 1, A =>
  Hom.comp (leftUnitor (fragmentModule A))
    (map (Hom.id dayTensorUnit)
      (linearOnlySomeAtProjectLists Delta n A))
| some  $\_ :: \_$ ,  $\_ + 1$ ,  $\_ \mapsto 0$ 
| none ::  $\_$ , 0,  $\_ \mapsto 0$ 

```

### 5.3.139 Project the unique occupied linear cell selected by context lookup and single-cell usage mask

**Definition.** Project the unique occupied linear cell selected by Lookup and OnlySomeAt.

**Construction.** Defined to be the linear only some at project lists of  $\Delta$ ,  $n$ ,  $A$ .

#### Lean 4 source QLambda/Linear/FragmentContextObjects.lean

```

noncomputable def linearOnlySomeAtProject {Delta : List (Option Ty)}
  {n : Nat} {A : Ty} (_hl : Lookup Delta n (some A))
  (_ho : OnlySomeAt Delta n) :
  Hom (linear Delta) (fragmentModule A) :=
  linearOnlySomeAtProjectLists Delta n A

```

### 5.3.140 Singleton occupied linear cell projects by the right unitor

**Statement.** Singleton occupied linear cell projects by the right unitor.

**Proof.** The goal is simplified using the definition of the linear only some at project lists.

**Lean 4 source** [QLambda/Linear/FragmentContextObjects.lean](#)

```
theorem linearOnlySomeAtProjectLists_singleton (A : Ty) :
  linearOnlySomeAtProjectLists [some A] 0 A =
    Hom.comp (rightUnitor (fragmentModule A))
      (map (Hom.id (fragmentModule A)) (Hom.id dayTensorUnit)) := by
  simp only [linearOnlySomeAtProjectLists]
  rfl
```

### 5.3.141 Canonical middle-four interchange $(M \otimes N) \otimes (P \otimes Q) \rightarrow (M \otimes P) \otimes (N \otimes Q)$

**Definition.** Canonical middle-four interchange  $(M \otimes N) \otimes (P \otimes Q) \rightarrow (M \otimes P) \otimes (N \otimes Q)$ .

**Construction.** Defined by an explicit formula built from the composition, the inverse associator, the Day tensor product and the functorial action.

**Lean 4 source** [QLambda/Linear/FragmentContextObjects.lean](#)

```
noncomputable def tensorInterchange (M N P Q : Module) :
  Hom (dayTensor (dayTensor M N) (dayTensor P Q))
    (dayTensor (dayTensor M P) (dayTensor N Q)) :=
  Hom.comp (associatorInv M P (dayTensor N Q))
    (Hom.comp (map (Hom.id M) (associator P N Q))
      (Hom.comp
        (map (Hom.id M) (map (braiding N P) (Hom.id Q)))
        (Hom.comp (map (Hom.id M) (associatorInv N P Q))
          (associator M N (dayTensor P Q))))))
```

### 5.3.142 Existence of the structural Day split induced by a linear ordered context split

**Statement.** Existence of the structural Day split induced by a linear OSplit. Formally:  $\text{Nonempty} (\text{Hom} (\text{linear } \Delta) (\text{dayTensor} (\text{linear } \Delta_1) (\text{linear } \Delta_2)))$ .

**Proof.** By induction on the derivation that  $\Delta$  splits into the left part  $\Delta_1$  and the right part  $\Delta_2$ . For the empty split, the claim is checked directly; for an absent cell shared by both parts, an occupied cell sent to the left part and an occupied cell sent to the right part, the claim follows from the induction hypothesis.

**Lean 4 source** [QLambda/Linear/FragmentContextSplit.lean](#)

```
theorem linearOSplit_exists {Delta Delta_1 Delta_2 : List (Option Ty)}
  (hs : OSplit Delta Delta_1 Delta_2) :
  Nonempty (Hom (linear Delta) (dayTensor (linear Delta_1) (linear Delta_2))) := by
  induction hs with
  | nil =>
    exact <leftUnitorInv dayTensorUnit>
  | none hs ih =>
    obtain <f> := ih
    exact <Hom.comp
      (map (leftUnitorInv _) (leftUnitorInv _))
```

```

      (Hom.comp (leftUnitor _) (map (Hom.id dayTensorUnit) f))>
| left hs ih =>
  obtain <f> := ih
  exact <Hom.comp
    (map (Hom.id _) (leftUnitorInv _))
    (Hom.comp (associatorInv _ _ _) (map (Hom.id _) f))>
| right hs ih =>
  obtain <f> := ih
  exact <Hom.comp
    (map (leftUnitorInv _) (Hom.id _))
    (Hom.comp (associator _ _ _)
      (Hom.comp (map (braiding _ _) (Hom.id _))
        (Hom.comp (associatorInv _ _ _) (map (Hom.id _) f))))>

```

### 5.3.143 Structural Day split on the underlying lists (computes without eliminating ordered context split)

**Definition.** Structural Day split on the underlying lists (computes without eliminating `OSplit` : Prop). Impossible shapes return 0.

**Construction.** Defined by cases on the input: `[], [], []`  $\mapsto$  the inverse left unitor of the Day tensor unit; `none ::  $\Delta$ , none ::  $\Delta_1$ , none ::  $\Delta_2$`   $\mapsto$  the composition of Hom; `some A ::  $\Delta$ , some B ::  $\Delta_1$ , none ::  $\Delta_2$`   $\mapsto$  if `h : A = B` then; `some A ::  $\Delta$ , none ::  $\Delta_1$ , some B ::  $\Delta_2$`   $\mapsto$  if `h : A = B` then; `_, _, _`  $\mapsto$  0.

#### Lean 4 source `QLambda/Linear/FragmentContextSplit.lean`

```

noncomputable def linearOSplitLists :
  forall (Delta Delta_1 Delta_2 : List (Option Ty)),
    Hom (linear Delta) (dayTensor (linear Delta_1) (linear Delta_2))
| [], [], [] => leftUnitorInv dayTensorUnit
| none :: Delta, none :: Delta_1, none :: Delta_2 =>
  Hom.comp
    (map (leftUnitorInv _) (leftUnitorInv _))
    (Hom.comp (leftUnitor _)
      (map (Hom.id dayTensorUnit) (linearOSplitLists Delta Delta_1 Delta_2)))
| some A :: Delta, some B :: Delta_1, none :: Delta_2 =>
  if h : A = B then
    h |> Hom.comp
      (map (Hom.id _) (leftUnitorInv _))
      (Hom.comp (associatorInv _ _ _)
        (map (Hom.id _) (linearOSplitLists Delta Delta_1 Delta_2)))
  else
    0
| some A :: Delta, none :: Delta_1, some B :: Delta_2 =>
  if h : A = B then
    h |> Hom.comp
      (map (leftUnitorInv _) (Hom.id _))
      (Hom.comp (associator _ _ _)
        (Hom.comp (map (braiding _ _) (Hom.id _))
          (Hom.comp (associatorInv _ _ _)
            (map (Hom.id _) (linearOSplitLists Delta Delta_1 Delta_2))))))
  else
    0

```

| \_, \_, \_ => 0

### 5.3.144 Structural Day split selected by an ordered context split witness

**Definition.** Structural Day split selected by an `OSplit` witness.

**Construction.** Defined to be the Day split on the underlying lists of  $\Delta$ ,  $\Delta_1$ ,  $\Delta_2$ .

**Lean 4 source** `QLambda/Linear/FragmentContextSplit.lean`

```
noncomputable def linearOSplit {Delta Delta_1 Delta_2 : List (Option Ty)}
  (_hs : OSplit Delta Delta_1 Delta_2) :
  Hom (linear Delta) (dayTensor (linear Delta_1) (linear Delta_2)) :=
  linearOSplitLists Delta Delta_1 Delta_2
```

### 5.3.145 Day split induced by an ordered context split of the empty list for context interpretations

**Statement.** If `[]` splits into the left part `[]` and the right part `[]`, then the Day split selected by `hs` equals the inverse left unitor of the Day tensor unit.

**Proof.** By definition. Unfolding the Day split induced by an ordered context split turns the left-hand side, the Day split selected by `hs`, into the right-hand side, the inverse left unitor of the Day tensor unit; the two sides are the same term.

**Lean 4 source** `QLambda/Linear/FragmentContextSplit.lean`

```
theorem linearOSplit_nil (hs : OSplit [] [] []) :
  linearOSplit hs = leftUnitorInv dayTensorUnit :=
  rfl
```

### 5.3.146 Physical bit copy retained only as a boundary map; unrestricted contraction below uses classical bit contraction

**Definition.** Physical bit copy retained only as a boundary map; unrestricted contraction below uses `classicalBitContraction`.

**Construction.** Defined to be the bit copy.

**Lean 4 source** `QLambda/Linear/FragmentContextSplit.lean`

```
noncomputable def bitContraction :
  Hom (representable 2) (dayTensorRepresentable 2 2) :=
  bitCopy
```

### 5.3.147 Classical-bit contraction into the actual coend Day tensor

**Definition.** Classical-bit contraction into the actual coend Day tensor.

**Construction.** Defined to be the classical bit contraction.

**Lean 4 source** `QLambda/Linear/FragmentContextSplit.lean`

```

noncomputable def bitContractionDay :
  Hom classicalBitModule
    (dayTensor classicalBitModule classicalBitModule) :=
  classicalBitContraction

```

### 5.3.148 Bit discard available for classical weakening (Route A, not bang)

**Definition.** Bit discard available for classical weakening (Route A, not bang).

**Construction.** Defined to be the classical bit weakening.

**Lean 4 source** [QLambda/Linear/FragmentContextSplit.lean](#)

```

noncomputable def bitWeakening :
  Hom classicalBitModule dayTensorUnit :=
  classicalBitWeakening

```

### 5.3.149 Existence of direct contraction for an all-bit unrestricted context

**Statement.** Existence of direct contraction for an all-bit unrestricted context. Formally:  $\text{Nonempty } (\text{Hom } (\text{unrestricted } \Gamma) (\text{dayTensor } (\text{unrestricted } \Gamma) (\text{unrestricted } \Gamma)))$ .

**Proof.** By induction on the unrestricted context  $\Gamma$ . For the empty context, the claim is checked directly; for a context extended by one cell, the claim follows from the induction hypothesis. It follows from the hypothesis that every unrestricted variable of  $\Gamma$  has bit type.

**Lean 4 source** [QLambda/Linear/FragmentContextSplit.lean](#)

```

theorem unrestrictedContraction_exists {Gamma : List Ty}
  (hGamma : CtxUAllBit Gamma) :
  Nonempty (Hom (unrestricted Gamma)
    (dayTensor (unrestricted Gamma) (unrestricted Gamma))) := by
  induction Gamma with
  | nil =>
    exact <leftUnitorInv dayTensorUnit>
  | cons A Gamma ih =>
    have hA : A = .bit := hGamma (List.Mem.head _)
    have htail : CtxUAllBit Gamma := by
      intro B hm
      exact hGamma (List.Mem.tail _ hm)
    subst A
    obtain <f> := ih htail
    exact <Hom.comp
      (tensorInterchange classicalBitModule classicalBitModule
        (unrestricted Gamma) (unrestricted Gamma))
      (map bitContractionDay f)>

```

### 5.3.150 Direct contraction for an all-bit unrestricted context

**Definition.** Direct contraction for an all-bit unrestricted context.

**Construction.** Defined by cases on the input:  $[] \mapsto$  the inverse left unitor of the Day tensor unit;  $.bit$   $:: \Gamma \mapsto$  the composition of  $\text{Hom}; \_ :: \_ \mapsto 0$ .

### Lean 4 source `QLambda/Linear/FragmentContextSplit.lean`

```
noncomputable def unrestrictedContractionLists :
  forall (Gamma : List Ty),
    Hom (unrestricted Gamma) (dayTensor (unrestricted Gamma) (unrestricted Gamma))
| [] => leftUnitorInv dayTensorUnit
| .bit :: Gamma =>
  Hom.comp
    (tensorInterchange classicalBitModule classicalBitModule
      (unrestricted Gamma) (unrestricted Gamma))
    (map bitContractionDay (unrestrictedContractionLists Gamma))
| _ :: _ => 0
```

#### 5.3.151 Direct contraction for an all-bit unrestricted context

**Definition.** Direct contraction for an all-bit unrestricted context.

**Construction.** Defined to be the unrestricted contraction lists of  $\Gamma$ .

### Lean 4 source `QLambda/Linear/FragmentContextSplit.lean`

```
noncomputable def unrestrictedContraction {Gamma : List Ty}
  (_hGamma : CtxUAllBit Gamma) :
  Hom (unrestricted Gamma)
    (dayTensor (unrestricted Gamma) (unrestricted Gamma)) :=
  unrestrictedContractionLists Gamma
```

#### 5.3.152 Unrestricted contraction of the empty list for context interpretations

**Statement.** If every unrestricted variable of  $[]$  has bit type, then the unrestricted contraction of  $h\Gamma$  equals the inverse left unitor of the Day tensor unit.

**Proof.** By definition. Unfolding the unrestricted contraction turns the left-hand side, the unrestricted contraction of  $h\Gamma$ , into the right-hand side, the inverse left unitor of the Day tensor unit; the two sides are the same term.

### Lean 4 source `QLambda/Linear/FragmentContextSplit.lean`

```
theorem unrestrictedContraction_nil (hGamma : CtxUAllBit []) :
  unrestrictedContraction hGamma = leftUnitorInv dayTensorUnit :=
  rfl
```

#### 5.3.153 Duplicate the shared unrestricted context and split the linear context

**Definition.** Duplicate the shared unrestricted context and split the linear context. On empty contexts the middle-four interchange is omitted: the split is definitionally  $\lambda^{-1} \otimes \lambda^{-1}$ , matching the Day-unit packaging used by closed `ite` Step soundness.

**Construction.** Defined by cases on the input:  $[], [], [], [] \mapsto$  the functorial action of the inverse left unitor of `dayTensorUnit`;  $\Gamma, \Delta, \Delta_1, \Delta_2 \mapsto$  the composition of `Hom`.

### Lean 4 source `QLambda/Linear/FragmentContextSplit.lean`

```

noncomputable def combinedOSplitLists :
  forall (Gamma : List Ty) (Delta Delta_1 Delta_2 : List (Option Ty)),
    Hom (combined Gamma Delta)
      (dayTensor (combined Gamma Delta_1) (combined Gamma Delta_2))
| [], [], [], [] =>
  map (leftUnitorInv dayTensorUnit) (leftUnitorInv dayTensorUnit)
| Gamma, Delta, Delta_1, Delta_2 =>
  Hom.comp
    (tensorInterchange (unrestricted Gamma) (unrestricted Gamma))
    (linear Delta_1) (linear Delta_2))
  (map (unrestrictedContractionLists Gamma) (linearOSplitLists Delta Delta_1
Delta_2))

```

### 5.3.154 Duplicate the shared unrestricted context and split the linear context

**Definition.** Duplicate the shared unrestricted context and split the linear context.

**Construction.** Defined to be `combinedOSplitLists  $\Gamma \Delta \Delta_1 \Delta_2$` .

**Lean 4 source** `QLambda/Linear/FragmentContextSplit.lean`

```

noncomputable def combinedOSplit {Gamma : List Ty}
  {Delta Delta_1 Delta_2 : List (Option Ty)} (_hGamma : CtxUAllBit Gamma)
  (_hs : OSplit Delta Delta_1 Delta_2) :
  Hom (combined Gamma Delta)
    (dayTensor (combined Gamma Delta_1) (combined Gamma Delta_2)) :=
  combinedOSplitLists Gamma Delta Delta_1 Delta_2

```

### 5.3.155 Empty combined split is the Day-unit pairing $\lambda^{-1} \otimes \lambda^{-1}$

**Statement.** Empty combined split is the Day-unit pairing  $\lambda^{-1} \otimes \lambda^{-1}$ . Formally: `combinedOSplit  $h\Gamma$   $hs$  = map (leftUnitorInv dayTensorUnit) (leftUnitorInv dayTensorUnit)`.

**Proof.** By definition. Unfolding the combined Day split of both contexts turns the left-hand side, the combined Day split of both contexts of  $h\Gamma$  and  $hs$ , into the right-hand side, the functorial action of the inverse left unitor of `dayTensorUnit`; the two sides are the same term.

**Lean 4 source** `QLambda/Linear/FragmentContextSplit.lean`

```

theorem combinedOSplit_nil (hGamma : CtxUAllBit []) (hs : OSplit [] [] []) :
  combinedOSplit hGamma hs =
    map (leftUnitorInv dayTensorUnit) (leftUnitorInv dayTensorUnit) :=
  rfl

```

### 5.3.156 Select an unrestricted bit variable from a combined context

**Definition.** Select an unrestricted bit variable from a combined context.

**Construction.** Defined to be the composite of the right unitor of `fragmentModule A` after the functorial action of `unrestrictedLookup  $h\Gamma$   $hl$`  and `linearAllNoneCollapse  $h\Delta$` .

**Lean 4 source** `QLambda/Linear/FragmentContextSplit.lean`



```

noncomputable def combinedLookupUnrestricted {Gamma : List Ty}
  {Delta : List (Option Ty)} {n : Nat} {A : Ty}
  (hGamma : CtxUAllBit Gamma) (hl : Lookup Gamma n A) (hDelta : AllNone Delta) :
  Hom (combined Gamma Delta) (fragmentModule A) :=
Hom.comp (rightUnitor (fragmentModule A))
  (map (unrestrictedLookup hGamma hl) (linearAllNoneCollapse hDelta))

```

### 5.3.157 Select the unique occupied linear variable from a combined context

**Definition.** Select the unique occupied linear variable from a combined context.

**Construction.** Defined to be the composite of the left unitor of `fragmentModule A` after the functorial action of `unrestrictedAllBitDiscard hΓ` and `linearOnlySomeAtProject hl ho`.

**Lean 4 source** [QLambda/Linear/FragmentContextSplit.lean](#)

```

noncomputable def combinedLookupLinear {Gamma : List Ty}
  {Delta : List (Option Ty)} {n : Nat} {A : Ty}
  (hGamma : CtxUAllBit Gamma) (hl : Lookup Delta n (some A))
  (ho : OnlySomeAt Delta n) :
  Hom (combined Gamma Delta) (fragmentModule A) :=
Hom.comp (leftUnitor (fragmentModule A))
  (map (unrestrictedAllBitDiscard hGamma)
    (linearOnlySomeAtProject hl ho))

```

### 5.3.158 Discard a combined context with an all-bit unrestricted part and no occupied linear cells

**Definition.** Discard a combined context with an all-bit unrestricted part and no occupied linear cells.

**Construction.** Defined to be the composite of the left unitor of `dayTensorUnit` after the functorial action of `unrestrictedAllBitDiscard hΓ` and `linearAllNoneCollapse hΔ`.

**Lean 4 source** [QLambda/Linear/FragmentContextSplit.lean](#)

```

noncomputable def combinedAllDiscard {Gamma : List Ty}
  {Delta : List (Option Ty)} (hGamma : CtxUAllBit Gamma) (hDelta : AllNone Delta) :
  Hom (combined Gamma Delta) dayTensorUnit :=
Hom.comp (leftUnitor dayTensorUnit)
  (map (unrestrictedAllBitDiscard hGamma) (linearAllNoneCollapse hDelta))

```

### 5.3.159 Extend a point at the Day unit to a constant map on a discardable combined context

**Definition.** Extend a point at the Day unit to a constant map on a discardable combined context.

**Construction.** Defined to be the composite of `f` after the combined all discard of `hΓ` and `hΔ`.

**Lean 4 source** [QLambda/Linear/FragmentContextSplit.lean](#)

```

noncomputable def combinedPoint {Gamma : List Ty}
  {Delta : List (Option Ty)} {A : Module}
  (hGamma : CtxUAllBit Gamma) (hDelta : AllNone Delta)
  (f : Hom dayTensorUnit A) :
  Hom (combined Gamma Delta) A :=
Hom.comp f (combinedAllDiscard hGamma hDelta)

```

### 5.3.160 Structural context maps do not depend on proof witnesses

**Statement.** Structural context maps do not depend on proof witnesses. Formally:  $\text{linearAllNoneCollapse } h = \text{linearAllNoneCollapse } h'$ .

**Proof.** Both sides apply the same construction to arguments that can differ only in proofs of the same proposition; since any two such proofs are equal, the two sides coincide by congruence.

**Lean 4 source** [QLambda/Linear/FragmentContextSplit.lean](#)

```
theorem linearAllNoneCollapse_proof_independent {Delta : List (Option Ty)}
  (h h' : AllNone Delta) :
  linearAllNoneCollapse h = linearAllNoneCollapse h' := by
  congr
```

### 5.3.161 The unrestricted all bit discard does not depend on the choice of proof

**Statement.** For an unrestricted context  $\Gamma$ : if every unrestricted variable of  $\Gamma$  has bit type, then the unrestricted all bit discard of  $h\Gamma$  equals the unrestricted all bit discard of  $h\Gamma'$ .

**Proof.** Both sides apply the same construction to arguments that can differ only in proofs of the same proposition; since any two such proofs are equal, the two sides coincide by congruence.

**Lean 4 source** [QLambda/Linear/FragmentContextSplit.lean](#)

```
theorem unrestrictedAllBitDiscard_proof_independent {Gamma : List Ty}
  (hGamma hGamma' : CtxUAllBit Gamma) :
  unrestrictedAllBitDiscard hGamma = unrestrictedAllBitDiscard hGamma' := by
  congr
```

### 5.3.162 The combined all discard does not depend on the choice of proof

**Statement.** For an unrestricted context  $\Gamma$ , a linear context  $\Delta$ : if every unrestricted variable of  $\Gamma$  has bit type and  $\Delta$  is an empty usage mask, then the combined all discard of  $h\Gamma$  and  $h\Delta$  equals the combined all discard of  $h\Gamma'$  and  $h\Delta'$ .

**Proof.** Both sides apply the same construction to arguments that can differ only in proofs of the same proposition; since any two such proofs are equal, the two sides coincide by congruence.

**Lean 4 source** [QLambda/Linear/FragmentContextSplit.lean](#)

```
theorem combinedAllDiscard_proof_independent {Gamma : List Ty}
  {Delta : List (Option Ty)} (hGamma hGamma' : CtxUAllBit Gamma) (hDelta hDelta' :
  AllNone Delta) :
  combinedAllDiscard hGamma hDelta = combinedAllDiscard hGamma' hDelta' := by
  congr
```

### 5.3.163 The linear only some at project does not depend on the choice of proof

**Statement.** For a linear context  $\Delta$ , a natural number  $n$ , a type  $A$ : if position  $n$  of  $\Delta$  holds some  $A$  and  $\Delta$  is occupied exactly at position  $n$ , then the linear only some at project of  $h\Delta$  and  $h\Delta'$  equals the linear only some at project of  $h\Delta$  and  $h\Delta'$ .

**Proof.** Both sides apply the same construction to arguments that can differ only in proofs of the same proposition; since any two such proofs are equal, the two sides coincide by congruence.

**Lean 4 source** [QLambda/Linear/FragmentContextSplit.lean](#)

```
theorem linearOnlySomeAtProject_proof_independent
  {Delta : List (Option Ty)} {n : Nat} {A : Ty}
  (hl hl' : Lookup Delta n (some A)) (ho ho' : OnlySomeAt Delta n) :
  linearOnlySomeAtProject hl ho =
    linearOnlySomeAtProject hl' ho' := by
  congr
```

### 5.3.164 The Day split induced by an ordered context split does not depend on the choice of proof

**Statement.** For linear contexts  $\Delta$ ,  $\Delta_1$ ,  $\Delta_2$ : if  $\Delta$  splits into the left part  $\Delta_1$  and the right part  $\Delta_2$ , then the Day split selected by  $hs$  equals the Day split selected by  $hs'$ .

**Proof.** Both sides apply the same construction to arguments that can differ only in proofs of the same proposition; since any two such proofs are equal, the two sides coincide by congruence.

**Lean 4 source** [QLambda/Linear/FragmentContextSplit.lean](#)

```
theorem linearOSplit_proof_independent {Delta Delta_1 Delta_2 : List (Option Ty)}
  (hs hs' : OSplit Delta Delta_1 Delta_2) :
  linearOSplit hs = linearOSplit hs' := by
  congr
```

### 5.3.165 The unrestricted context lookup does not depend on the choice of proof

**Statement.** For an unrestricted context  $\Gamma$ , a natural number  $n$ , a type  $A$ : if every unrestricted variable of  $\Gamma$  has bit type and position  $n$  of  $\Gamma$  holds  $A$ , then the unrestricted context lookup of  $h\Gamma$  and  $hl$  equals the unrestricted context lookup of  $h\Gamma'$  and  $hl'$ .

**Proof.** Both sides apply the same construction to arguments that can differ only in proofs of the same proposition; since any two such proofs are equal, the two sides coincide by congruence.

**Lean 4 source** [QLambda/Linear/FragmentContextSplit.lean](#)

```
theorem unrestrictedLookup_proof_independent
  {Gamma : List Ty} {n : Nat} {A : Ty}
  (hGamma hGamma' : CtxUAllBit Gamma) (hl hl' : Lookup Gamma n A) :
  unrestrictedLookup hGamma hl = unrestrictedLookup hGamma' hl' := by
  congr
```

### 5.3.166 The combined Day split of both contexts does not depend on the choice of proof

**Statement.** For an unrestricted context  $\Gamma$ , linear contexts  $\Delta$ ,  $\Delta_1$ ,  $\Delta_2$ : if every unrestricted variable of  $\Gamma$  has bit type and  $\Delta$  splits into the left part  $\Delta_1$  and the right part  $\Delta_2$ , then the combined Day split of both contexts of  $h\Gamma$  and  $hs$  equals the combined Day split of both contexts of  $h\Gamma'$  and  $hs'$ .

**Proof.** Both sides apply the same construction to arguments that can differ only in proofs of the same proposition; since any two such proofs are equal, the two sides coincide by congruence.

### Lean 4 source `QLambda/Linear/FragmentContextSplit.lean`

```
theorem combinedOSplit_proof_independent {Gamma : List Ty}
  {Delta Delta_1 Delta_2 : List (Option Ty)}
  (hGamma hGamma' : CtxUAllBit Gamma) (hs hs' : OSplit Delta Delta_1 Delta_2) :
  combinedOSplit hGamma hs = combinedOSplit hGamma' hs' := by
  congr
```

### 5.3.167 Type-valued fragment typing certificate (canonical derivation shape)

**Definition.** Type-valued fragment typing certificate (canonical derivation shape).

**Construction.** Generated by the rules `unit`, `bitLit`, `prim`, `varU`, `varL`, `lamU`, `lamL`, `appL`, `appU`, `pair`, `unpair` and `ite`. Every element arises from finitely many applications of these rules, so properties are proved by induction over them.

### Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```
inductive FragCert : List Ty -> List (Option Ty) -> Term -> Ty -> Type where
| unit {Gamma Delta} (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta) :
  :
  AllNone Delta -> FragCert Gamma Delta .unit .unit
| bitLit {Gamma Delta} (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (b : Bool) : AllNone Delta -> FragCert Gamma Delta (.bitLit b) .bit
| prim {Gamma Delta} (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (p : Prim) : AllNone Delta -> FragCert Gamma Delta (.prim p) (primTy p)
| varU {Gamma Delta n A} (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta) :
  Lookup Gamma n A -> Ty.Duplicable A -> AllNone Delta -> Ty.
  SemanticFragment A ->
  FragCert Gamma Delta (.var .unres n) A
| varL {Gamma Delta n A} (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta) :
  Lookup Delta n (some A) -> OnlySomeAt Delta n -> Ty.SemanticFragment A ->
  FragCert Gamma Delta (.var .lin n) A
| lamU {Gamma Delta A B M} (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta) :
  Ty.Admissible A -> Ty.Duplicable A -> AllNone Delta ->
  Ty.SemanticFragment (.arrow .unres A B) ->
  FragCert (A :: Gamma) Delta M B ->
  FragCert Gamma Delta (.lam .unres A M) (.arrow .unres A B)
| lamL {Gamma Delta A B M} (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta) :
  Ty.Admissible A -> Ty.FirstOrder A -> Ty.SemanticFragment B ->
  FragCert Gamma (some A :: Delta) M B ->
  FragCert Gamma Delta (.lam .lin A M) (.arrow .lin A B)
| appL {Gamma Delta Delta_1 Delta_2 A B F X} (hGamma : CtxUAllBit Gamma)
  (hDelta : CtxLAllSomeFragment Delta) :
  OSplit Delta Delta_1 Delta_2 -> Ty.FirstOrder A -> Ty.SemanticFragment B ->
  FragCert Gamma Delta_1 F (.arrow .lin A B) -> FragCert Gamma Delta_2 X A ->
  FragCert Gamma Delta (.app F X) B
| appU {Gamma Delta DeltaF DeltaX B F X} (hGamma : CtxUAllBit Gamma)
  (hDelta : CtxLAllSomeFragment Delta) :
```

```

    OSplit Delta DeltaF DeltaX -> AllNone DeltaX -> Ty.SemanticFragment B ->
    FragCert Gamma DeltaF F (.arrow .unres .bit B) -> FragCert Gamma DeltaX X .bit
->
    FragCert Gamma Delta (.app F X) B
| pair {Gamma Delta Delta_1 Delta_2 A B M N} (hGamma : CtxUAllBit Gamma)
  (hDelta : CtxLAllSomeFragment Delta) :
  OSplit Delta Delta_1 Delta_2 -> Ty.FirstOrder A -> Ty.FirstOrder B ->
  FragCert Gamma Delta_1 M A -> FragCert Gamma Delta_2 N B ->
  FragCert Gamma Delta (.pair M N) (.tensor A B)
| unpair {Gamma Delta Delta_1 Delta_2 A B C M K} (hGamma : CtxUAllBit Gamma)
  (hDelta : CtxLAllSomeFragment Delta) :
  OSplit Delta Delta_1 Delta_2 -> Ty.FirstOrder A -> Ty.FirstOrder B ->
  Ty.SemanticFragment C ->
  FragCert Gamma Delta_1 M (.tensor A B) ->
  FragCert Gamma Delta_2 K (.arrow .lin A (.arrow .lin B C)) ->
  FragCert Gamma Delta (.unpair M K) C
| ite {Gamma Delta Delta_1 Delta_2 A B T E} (hGamma : CtxUAllBit Gamma)
  (hDelta : CtxLAllSomeFragment Delta) :
  OSplit Delta Delta_1 Delta_2 -> Ty.SemanticFragment A ->
  FragCert Gamma Delta_1 B .bit -> FragCert Gamma Delta_2 T A -> FragCert
Gamma Delta_2 E A ->
  FragCert Gamma Delta (.ite B T E) A
| measure {Gamma Delta Delta_1 Delta_2 A Q K} (hGamma : CtxUAllBit Gamma)
  (hDelta : CtxLAllSomeFragment Delta) :
  OSplit Delta Delta_1 Delta_2 -> Ty.SemanticFragment A ->
  FragCert Gamma Delta_1 Q .qubit ->
  FragCert Gamma Delta_2 K (.arrow .unres .bit (.arrow .lin .qubit A)) ->
  FragCert Gamma Delta (.measure Q K) A

```

### 5.3.168 Every certificate implies ordinary typing judgement

**Statement.** Every certificate implies ordinary HasType. Formally:  $\text{FragCert } \Gamma \Delta M A \rightarrow \text{HasType } \Gamma \Delta M A$ .

**Proof.** The claim follows from the definitions of the objects involved.

#### Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```

theorem toHasType {Gamma Delta M A} : FragCert Gamma Delta M A -> HasType Gamma
Delta M A
| .unit _ _ h => .unit h
| .bitLit _ _ _ h => .bitLit h
| .prim _ _ _ h => .prim h
| .varU _ _ hL hD hN _ => .varU hL hD hN
| .varL _ _ hL hO _ => .varL hL hO
| .lamU _ _ hAd hDup hN _ c => .lamU hAd hDup hN c.toHasType
| .lamL _ _ hAd _ _ c => .lamL hAd c.toHasType
| .appL _ _ hS _ _ cF cX => .appL hS cF.toHasType cX.toHasType
| .appU _ _ hS hN _ cF cX => .appU hS hN cF.toHasType cX.toHasType
| .pair _ _ hS _ _ cM cN => .pair hS cM.toHasType cN.toHasType
| .unpair _ _ hS _ _ _ cM cK => .unpair hS cM.toHasType cK.toHasType
| .ite _ _ hS _ cB cT cE => .ite hS cB.toHasType cT.toHasType cE.toHasType
| .measure _ _ hS _ cQ cK => .measure hS cQ.toHasType cK.toHasType

```

### 5.3.169 Every certificate result type lies in the semantic fragment

**Statement.** Every certificate result type lies in the semantic fragment. Formally:  $\text{FragCert } \Gamma \Delta M A \rightarrow \text{Ty.SemanticFragment } A$ .

**Proof.** The claim follows from the definitions of the objects involved.

#### Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```
theorem result_fragment {Gamma Delta M A} : FragCert Gamma Delta M A -> Ty.
  SemanticFragment A
| .unit _ _ _ => Ty.SemanticFragment.unit
| .bitLit _ _ _ => Ty.SemanticFragment.bit
| .prim _ _ p _ => Ty.SemanticFragment.primTy_fragment p
| .varU _ _ _ _ h => h
| .varL _ _ _ _ h => h
| .lamU _ _ _ _ hArr _ => hArr
| .lamL _ _ _ hA hB _ => .arrowLin hA hB
| .appL _ _ _ _ hB _ _ => hB
| .appU _ _ _ _ hB _ _ => hB
| .pair _ _ _ hA hB _ _ => Ty.SemanticFragment.tensor hA hB
| .unpair _ _ _ _ hC _ _ => hC
| .ite _ _ _ hA _ _ _ => hA
| .measure _ _ _ hA _ _ => hA
```

### 5.3.170 Every certified term lies in the syntactic semantic fragment

**Statement.** Every certified term lies in the syntactic semantic fragment. Formally:  $\text{FragCert } \Gamma \Delta M A \rightarrow \text{Term.SemanticFragment } M$ .

**Proof.** The claim follows from the definitions of the objects involved.

#### Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```
theorem term_fragment {Gamma Delta M A} : FragCert Gamma Delta M A -> Term.
  SemanticFragment M
| .unit _ _ _ => .unit
| .bitLit _ _ _ => .bitLit
| .prim _ _ _ => .prim
| .varU _ _ _ _ => .var
| .varL _ _ _ _ => .var
| .lamU _ _ _ _ hArr c =>
  (Ty.SemanticFragment.arrow_unres_eq hArr).symm |>
  Term.SemanticFragment.lam Ty.SemanticFragment.bit c.term_fragment
| .lamL _ _ _ hFO _ c =>
  .lam (Ty.SemanticFragment.of_firstOrder hFO) c.term_fragment
| .appL _ _ _ _ cF cX => .app cF.term_fragment cX.term_fragment
| .appU _ _ _ _ cF cX => .app cF.term_fragment cX.term_fragment
| .pair _ _ _ _ cM cN => .pair cM.term_fragment cN.term_fragment
| .unpair _ _ _ _ cM cK => .unpair cM.term_fragment cK.term_fragment
| .ite _ _ _ _ cB cT cE =>
  .ite cB.term_fragment cT.term_fragment cE.term_fragment
| .measure _ _ _ _ cQ cK => .measure cQ.term_fragment cK.term_fragment
```

### 5.3.171 Context types in unrestricted and linear scopes lie in the fragment

**Statement.** Context types in unrestricted and linear scopes lie in the fragment. Formally:  $\text{CtxUAllBit } \Gamma \wedge \text{CtxLAllSomeFragment } \Delta$ .

**Proof.** By induction on  $c$ . For a unit, a bit literal, a primitive, an unrestricted variable, a linear variable, an unrestricted lambda abstraction, a linear lambda abstraction, a linear application, an unrestricted application, a pair, a pair elimination, a conditional and a measurement, the claim is checked directly.

#### Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```
theorem ctx_fragment {Gamma Delta M A} (c : FragCert Gamma Delta M A) :
  CtxUAllBit Gamma /\ CtxLAllSomeFragment Delta := by
  induction c with
  | unit hGamma hDelta _ => exact <hGamma, hDelta>
  | bitLit hGamma hDelta _ _ => exact <hGamma, hDelta>
  | prim hGamma hDelta _ _ => exact <hGamma, hDelta>
  | varU hGamma hDelta _ _ _ => exact <hGamma, hDelta>
  | varL hGamma hDelta _ _ _ => exact <hGamma, hDelta>
  | lamU hGamma hDelta _ _ _ _ => exact <hGamma, hDelta>
  | lamL hGamma hDelta _ _ _ _ => exact <hGamma, hDelta>
  | appL hGamma hDelta _ _ _ _ => exact <hGamma, hDelta>
  | appU hGamma hDelta _ _ _ _ => exact <hGamma, hDelta>
  | pair hGamma hDelta _ _ _ _ => exact <hGamma, hDelta>
  | unpair hGamma hDelta _ _ _ _ => exact <hGamma, hDelta>
  | ite hGamma hDelta _ _ _ _ => exact <hGamma, hDelta>
  | measure hGamma hDelta _ _ _ _ => exact <hGamma, hDelta>
```

### 5.3.172 Fragment binder discipline: linear binders are first-order; unrestricted binders are classical bits

**Definition.** Fragment binder discipline: linear binders are first-order; unrestricted binders are classical bits.

**Construction.** Defined by cases on the input:  $\text{.app } F \ X \mapsto \text{FragmentBinders } F \wedge \text{FragmentBinders } X$ ;  $\text{.lam .lin dom body} \mapsto \text{Ty.FirstOrder dom} \wedge \text{FragmentBinders body}$ ;  $\text{.lam .unres dom body} \mapsto \text{dom} = \text{.bit} \wedge \text{FragmentBinders body}$ ;  $\text{.pair } M \ N \mapsto \text{FragmentBinders } M \wedge \text{FragmentBinders } N$ ;  $\text{.unpair } M \ K \mapsto \text{FragmentBinders } M \wedge \text{FragmentBinders } K$ ;  $\text{.ite } B \ T \ E \mapsto \text{FragmentBinders } B \wedge \text{FragmentBinders } T \wedge \text{FragmentBinders } E$ ;  $\text{.measure } Q \ K \mapsto \text{FragmentBinders } Q \wedge \text{FragmentBinders } K$ ;  $\text{.fix } \_ \_ \mid \text{.fold } \_ \_ \mid \text{.unfold } \_ \mapsto \text{False}$ ; and so on for the remaining cases.

#### Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```
def FragmentBinders : Term -> Prop
| .app F X => FragmentBinders F /\ FragmentBinders X
| .lam .lin dom body => Ty.FirstOrder dom /\ FragmentBinders body
| .lam .unres dom body => dom = .bit /\ FragmentBinders body
| .pair M N => FragmentBinders M /\ FragmentBinders N
| .unpair M K => FragmentBinders M /\ FragmentBinders K
| .ite B T E => FragmentBinders B /\ FragmentBinders T /\ FragmentBinders E
| .measure Q K => FragmentBinders Q /\ FragmentBinders K
| .fix _ _ | .fold _ _ | .unfold _ => False
| _ => True
```

### 5.3.173 The fragment-binder condition passes from an application to its left component

**Statement.** For terms  $F, X$ : if  $\text{FragmentBinders } (.app F X)$ , then  $\text{FragmentBinders } F$ .

**Proof.** The hypothesis that  $\text{FragmentBinders } (.app F X)$  unfolds to a conjunction, and the claim is first of its components.

**Lean 4 source** [QLambda/Linear/FragmentDenotation.lean](#)

```
theorem app_left {F X : Term} (h : FragmentBinders (.app F X)) : FragmentBinders F :=  
  h.1
```

### 5.3.174 The fragment-binder condition passes from an application to its right component

**Statement.** For terms  $F, X$ : if  $\text{FragmentBinders } (.app F X)$ , then  $\text{FragmentBinders } X$ .

**Proof.** The hypothesis that  $\text{FragmentBinders } (.app F X)$  unfolds to a conjunction, and the claim is second of its components.

**Lean 4 source** [QLambda/Linear/FragmentDenotation.lean](#)

```
theorem app_right {F X : Term} (h : FragmentBinders (.app F X)) : FragmentBinders X :=  
  h.2
```

### 5.3.175 Linear lambda abstraction of the first-order type for fragment binders

**Statement.** For a type  $\text{dom}$ , a term  $M$ : if  $\text{FragmentBinders } (.lam .lin \text{ dom } M)$ , then  $\text{dom}$  is a first-order type.

**Proof.** The hypothesis that  $\text{FragmentBinders } (.lam .lin \text{ dom } M)$  unfolds to a conjunction, and the claim is first of its components.

**Lean 4 source** [QLambda/Linear/FragmentDenotation.lean](#)

```
theorem lamLin_firstOrder {dom : Ty} {M : Term}  
  (h : FragmentBinders (.lam .lin dom M)) : Ty.FirstOrder dom := h.1
```

### 5.3.176 Linear lambda abstraction of the body for fragment binders

**Statement.** For a type  $\text{dom}$ , a term  $M$ : if  $\text{FragmentBinders } (.lam .lin \text{ dom } M)$ , then  $\text{FragmentBinders } M$ .

**Proof.** The hypothesis that  $\text{FragmentBinders } (.lam .lin \text{ dom } M)$  unfolds to a conjunction, and the claim is second of its components.

**Lean 4 source** [QLambda/Linear/FragmentDenotation.lean](#)

```
theorem lamLin_body {dom : Ty} {M : Term}  
  (h : FragmentBinders (.lam .lin dom M)) : FragmentBinders M := h.2
```



### 5.3.177 Unrestricted lambda abstraction of the bit for fragment binders

**Statement.** For a type `dom`, a term `M`: if `FragmentBinders (.lam .unres dom M)`, then `dom` equals the bit.

**Proof.** The hypothesis that `FragmentBinders (.lam .unres dom M)` unfolds to a conjunction, and the claim is first of its components.

**Lean 4 source** [QLambda/Linear/FragmentDenotation.lean](#)

```
theorem lamUnres_bit {dom : Ty} {M : Term}
  (h : FragmentBinders (.lam .unres dom M)) : dom = .bit := h.1
```

### 5.3.178 Unrestricted lambda abstraction of the body for fragment binders

**Statement.** For a type `dom`, a term `M`: if `FragmentBinders (.lam .unres dom M)`, then `FragmentBinders M`.

**Proof.** The hypothesis that `FragmentBinders (.lam .unres dom M)` unfolds to a conjunction, and the claim is second of its components.

**Lean 4 source** [QLambda/Linear/FragmentDenotation.lean](#)

```
theorem lamUnres_body {dom : Ty} {M : Term}
  (h : FragmentBinders (.lam .unres dom M)) : FragmentBinders M := h.2
```

### 5.3.179 The fragment-binder condition passes from a pair to its left component

**Statement.** For terms `M`, `N`: if `FragmentBinders (.pair M N)`, then `FragmentBinders M`.

**Proof.** The hypothesis that `FragmentBinders (.pair M N)` unfolds to a conjunction, and the claim is first of its components.

**Lean 4 source** [QLambda/Linear/FragmentDenotation.lean](#)

```
theorem pair_left {M N : Term} (h : FragmentBinders (.pair M N)) : FragmentBinders M
:= h.1
```

### 5.3.180 The fragment-binder condition passes from a pair to its right component

**Statement.** For terms `M`, `N`: if `FragmentBinders (.pair M N)`, then `FragmentBinders N`.

**Proof.** The hypothesis that `FragmentBinders (.pair M N)` unfolds to a conjunction, and the claim is second of its components.

**Lean 4 source** [QLambda/Linear/FragmentDenotation.lean](#)

```
theorem pair_right {M N : Term} (h : FragmentBinders (.pair M N)) : FragmentBinders N
:= h.2
```

### 5.3.181 The fragment-binder condition passes from a pair elimination to its left component

**Statement.** For terms  $M, K$ : if  $\text{FragmentBinders } (.unpair\ M\ K)$ , then  $\text{FragmentBinders } M$ .

**Proof.** The hypothesis that  $\text{FragmentBinders } (.unpair\ M\ K)$  unfolds to a conjunction, and the claim is first of its components.

**Lean 4 source** [QLambda/Linear/FragmentDenotation.lean](#)

```
theorem unpair_left {M K : Term} (h : FragmentBinders (.unpair M K)) : FragmentBinders
  M := h.1
```

### 5.3.182 The fragment-binder condition passes from a pair elimination to its right component

**Statement.** For terms  $M, K$ : if  $\text{FragmentBinders } (.unpair\ M\ K)$ , then  $\text{FragmentBinders } K$ .

**Proof.** The hypothesis that  $\text{FragmentBinders } (.unpair\ M\ K)$  unfolds to a conjunction, and the claim is second of its components.

**Lean 4 source** [QLambda/Linear/FragmentDenotation.lean](#)

```
theorem unpair_right {M K : Term} (h : FragmentBinders (.unpair M K)) :
  FragmentBinders K := h.2
```

### 5.3.183 The fragment-binder condition passes from a conditional to its condition

**Statement.** For terms  $B, T, E$ : if  $\text{FragmentBinders } (.ite\ B\ T\ E)$ , then  $\text{FragmentBinders } B$ .

**Proof.** The hypothesis that  $\text{FragmentBinders } (.ite\ B\ T\ E)$  unfolds to a conjunction, and the claim is first of its components.

**Lean 4 source** [QLambda/Linear/FragmentDenotation.lean](#)

```
theorem ite_cond {B T E : Term} (h : FragmentBinders (.ite B T E)) : FragmentBinders B
  := h.1
```

### 5.3.184 The fragment-binder condition passes from a conditional to its then-branch

**Statement.** For terms  $B, T, E$ : if  $\text{FragmentBinders } (.ite\ B\ T\ E)$ , then  $\text{FragmentBinders } T$ .

**Proof.** The hypothesis that  $\text{FragmentBinders } (.ite\ B\ T\ E)$  unfolds to a conjunction, and the claim is first of its components.

**Lean 4 source** [QLambda/Linear/FragmentDenotation.lean](#)

```
theorem ite_then {B T E : Term} (h : FragmentBinders (.ite B T E)) : FragmentBinders T
  := h.2.1
```

### 5.3.185 The fragment-binder condition passes from a conditional to its else-branch

**Statement.** For terms  $B, T, E$ : if  $\text{FragmentBinders } (.ite\ B\ T\ E)$ , then  $\text{FragmentBinders } E$ .

**Proof.** The hypothesis that  $\text{FragmentBinders } (.ite\ B\ T\ E)$  unfolds to a conjunction, and the claim is the last of its components.

**Lean 4 source** [QLambda/Linear/FragmentDenotation.lean](#)

```
theorem ite_else {B T E : Term} (h : FragmentBinders (.ite B T E)) : FragmentBinders E
  := h.2.2
```

### 5.3.186 The fragment-binder condition passes from a measurement to its qubit argument

**Statement.** For terms  $Q, K$ : if  $\text{FragmentBinders } (.measure\ Q\ K)$ , then  $\text{FragmentBinders } Q$ .

**Proof.** The hypothesis that  $\text{FragmentBinders } (.measure\ Q\ K)$  unfolds to a conjunction, and the claim is first of its components.

**Lean 4 source** [QLambda/Linear/FragmentDenotation.lean](#)

```
theorem measure_qubit {Q K : Term} (h : FragmentBinders (.measure Q K)) :
  FragmentBinders Q := h.1
```

### 5.3.187 The fragment-binder condition passes from a measurement to its continuation

**Statement.** For terms  $Q, K$ : if  $\text{FragmentBinders } (.measure\ Q\ K)$ , then  $\text{FragmentBinders } K$ .

**Proof.** The hypothesis that  $\text{FragmentBinders } (.measure\ Q\ K)$  unfolds to a conjunction, and the claim is second of its components.

**Lean 4 source** [QLambda/Linear/FragmentDenotation.lean](#)

```
theorem measure_cont {Q K : Term} (h : FragmentBinders (.measure Q K)) :
  FragmentBinders K := h.2
```

### 5.3.188 Term of the fragment for fragment binders

**Statement.** For a term  $M$ : if  $\text{FragmentBinders } M$ , then  $M$  lies in the semantic fragment.

**Proof.** The claim follows from the definitions of the objects involved.

**Lean 4 source** [QLambda/Linear/FragmentDenotation.lean](#)

```
theorem term_fragment :
  forall {M : Term}, FragmentBinders M -> Term.SemanticFragment M
| .var _ _, _ => .var
| .lam .lin A M, h =>
  .lam (Ty.SemanticFragment.of_firstOrder h.1)
    (term_fragment h.2)
| .lam .unres A M, h => by
  change A = .bit /\ FragmentBinders M at h
  rw [h.1]
  exact .lam Ty.SemanticFragment.bit (term_fragment h.2)
```

```

| .app F X, h => .app (term_fragment h.1) (term_fragment h.2)
| .unit, _ => .unit
| .bitLit _, _ => .bitLit
| .pair M N, h => .pair (term_fragment h.1) (term_fragment h.2)
| .unpair M K, h => .unpair (term_fragment h.1) (term_fragment h.2)
| .ite B T E, h =>
  .ite (term_fragment h.1) (term_fragment h.2.1)
    (term_fragment h.2.2)
| .prim _, _ => .prim
| .measure Q K, h => .measure (term_fragment h.1) (term_fragment h.2)
| .fix _ _, h => False.elim h
| .fold _ _, h => False.elim h
| .unfold _, h => False.elim h

```

### 5.3.189 Binder-shape information retained through result types

**Definition.** Binder-shape information retained through result types. Unlike `Ty.SemanticFragment`, this predicate deliberately imposes no condition on first-order leaves; it records exactly the domain facts needed while reconstructing certificates for application and unpairing.

**Construction.** Defined by cases on the input: `.arrow .lin A B`  $\mapsto$  `Ty.FirstOrder A`  $\wedge$  `FragmentArrowDomains B`; `.arrow .unres A B`  $\mapsto$  `A = .bit`  $\wedge$  `FragmentArrowDomains B`; `_`  $\mapsto$  `True`.

#### Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```

def FragmentArrowDomains : Ty -> Prop
| .arrow .lin A B => Ty.FirstOrder A /\ FragmentArrowDomains B
| .arrow .unres A B => A = .bit /\ FragmentArrowDomains B
| _ => True

```

### 5.3.190 A fragment arrow domain obtained from a semantic-fragment membership

**Statement.** For a type `A`: if `A` lies in the semantic fragment, then `FragmentArrowDomains A`.

**Proof.** By induction on the derivation that `A` lies in the semantic fragment. For a construction from a first-order type, the claim is checked directly; for a function type linear and a function type unrestricted bit, the claim follows from the induction hypothesis.

#### Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```

theorem of_semanticFragment {A : Ty} (h : Ty.SemanticFragment A) :
  FragmentArrowDomains A := by
  induction h with
  | ofFirstOrder h =>
    cases h <|> trivial
  | arrowLin hA _ ih => exact <hA, ih>
  | arrowUnresBit _ ih => exact <rfl, ih>

```

### 5.3.191 A fragment arrow domain obtained from a typing judgement

**Statement.** If  $M$  has type  $A$  under the unrestricted context  $\Gamma$  and the linear context  $\Delta$ ; every unrestricted variable of  $\Gamma$  has bit type; every cell of the linear context  $\Delta$  is occupied by a fragment type; and `FragmentBinders M`, then `FragmentArrowDomains A`.

**Proof.** The claim follows from the definitions of the objects involved.

#### Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```
theorem of_hasType :
  forall {Gamma Delta M A}, HasType Gamma Delta M A ->
    CtxUAllBit Gamma -> CtxLAllSomeFragment Delta ->
      FragmentBinders M -> FragmentArrowDomains A
| _, _, _, _, .varU hl _ _, hGamma, _, _ => by
  rw [CtxUAllBit.lookup hGamma hl]
  trivial
| _, _, _, _, .varL hl _ _, hDelta, _ =>
  of_semanticFragment (CtxLAllSomeFragment.lookup hDelta hl)
| _, _, _, _, .lamU _ _ _ h, hGamma, hDelta, hb => by
  change _ = Ty.bit /\ _
  exact <FragmentBinders.lamUnres_bit hb,
    of_hasType h
    (FragmentBinders.lamUnres_bit hb |> CtxUAllBit.cons hGamma)
    hDelta (FragmentBinders.lamUnres_body hb)>
| _, _, _, _, .lamL _ h, hGamma, hDelta, hb =>
  <FragmentBinders.lamLin_firstOrder hb,
    of_hasType h hGamma
    (CtxLAllSomeFragment.cons_some
      (Ty.SemanticFragment.of_firstOrder
        (FragmentBinders.lamLin_firstOrder hb)) hDelta)
    (FragmentBinders.lamLin_body hb)>
| _, _, _, _, .appL hs hF _ , hGamma, hDelta, hb =>
  (of_hasType hF hGamma (CtxLAllSomeFragment.of_oSplit_left hDelta hs)
    (FragmentBinders.app_left hb)).2
| _, _, _, _, .appU hs _ hF _ , hGamma, hDelta, hb =>
  (of_hasType hF hGamma (CtxLAllSomeFragment.of_oSplit_left hDelta hs)
    (FragmentBinders.app_left hb)).2
| _, _, _, _, .unit _ , _ , _ => trivial
| _, _, _, _, .bitLit _ , _ , _ => trivial
| _, _, _, _, .pair _ _ _ , _ , _ => trivial
| _, _, _, _, .unpair hs _ hK, hGamma, hDelta, hb =>
  (of_hasType hK hGamma (CtxLAllSomeFragment.of_oSplit_right hDelta hs)
    (FragmentBinders.unpair_right hb)).2.2
| _, _, _, _, .ite hs _ hT _ , hGamma, hDelta, hb =>
  of_hasType hT hGamma (CtxLAllSomeFragment.of_oSplit_right hDelta hs)
    (FragmentBinders.ite_then hb)
| _, _, _, _, .prim _ , _ , _ =>
  of_semanticFragment (Ty.SemanticFragment.primTy_fragment _)
| _, _, _, _, .measure hs _ hK, hGamma, hDelta, hb =>
  (of_hasType hK hGamma (CtxLAllSomeFragment.of_oSplit_right hDelta hs)
    (FragmentBinders.measure_cont hb)).2.2
| _, _, _, _, .fix _ _ _ _ , _ , _ , hb => False.elim hb
| _, _, _, _, .fold _ _ _ , _ , _ , hb => False.elim hb
| _, _, _, _, .unfold _ _ _ , _ , _ , hb => False.elim hb
```

### 5.3.192 Propositional fragment judgment (mirror of FragCert)

**Definition.** Propositional fragment judgment (mirror of FragCert).

**Construction.** Generated by the rules unit, bitLit, prim, varU, varL, lamU, lamL, appL, appU, pair, unpair and ite. Every element arises from finitely many applications of these rules, so properties are proved by induction over them.

#### Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```
inductive FragmentJudgment : List Ty -> List (Option Ty) -> Term -> Ty -> Prop
  where
  | unit {Gamma Delta} (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta) :
    AllNone Delta -> FragmentJudgment Gamma Delta .unit .unit
  | bitLit {Gamma Delta} (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta) :
    (b : Bool) : AllNone Delta -> FragmentJudgment Gamma Delta (.bitLit b) .bit
  | prim {Gamma Delta} (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta) :
    (p : Prim) : AllNone Delta -> FragmentJudgment Gamma Delta (.prim p) (primTy p)
  | varU {Gamma Delta n A} (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta) :
    Lookup Gamma n A -> Ty.Duplicable A -> AllNone Delta -> Ty.
    SemanticFragment A ->
    FragmentJudgment Gamma Delta (.var .unres n) A
  | varL {Gamma Delta n A} (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta) :
    Lookup Delta n (some A) -> OnlySomeAt Delta n -> Ty.SemanticFragment A ->
    FragmentJudgment Gamma Delta (.var .lin n) A
  | lamU {Gamma Delta A B M} (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta) :
    Ty.Admissible A -> Ty.Duplicable A -> AllNone Delta ->
    Ty.SemanticFragment (.arrow .unres A B) ->
    FragmentJudgment (A :: Gamma) Delta M B ->
    FragmentJudgment Gamma Delta (.lam .unres A M) (.arrow .unres A B)
  | lamL {Gamma Delta A B M} (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta) :
    Ty.Admissible A -> Ty.FirstOrder A -> Ty.SemanticFragment B ->
    FragmentJudgment Gamma (some A :: Delta) M B ->
    FragmentJudgment Gamma Delta (.lam .lin A M) (.arrow .lin A B)
  | appL {Gamma Delta Delta_1 Delta_2 A B F X} (hGamma : CtxUAllBit Gamma)
    (hDelta : CtxLAllSomeFragment Delta) :
    OSplit Delta Delta_1 Delta_2 -> Ty.FirstOrder A -> Ty.SemanticFragment B ->
    FragmentJudgment Gamma Delta_1 F (.arrow .lin A B) -> FragmentJudgment Gamma
    Delta_2 X A ->
    FragmentJudgment Gamma Delta (.app F X) B
  | appU {Gamma Delta DeltaF DeltaX B F X} (hGamma : CtxUAllBit Gamma)
    (hDelta : CtxLAllSomeFragment Delta) :
    OSplit Delta DeltaF DeltaX -> AllNone DeltaX -> Ty.SemanticFragment B ->
    FragmentJudgment Gamma DeltaF F (.arrow .unres .bit B) ->
    FragmentJudgment Gamma DeltaX X .bit ->
    FragmentJudgment Gamma Delta (.app F X) B
  | pair {Gamma Delta Delta_1 Delta_2 A B M N} (hGamma : CtxUAllBit Gamma)
    (hDelta : CtxLAllSomeFragment Delta) :
    OSplit Delta Delta_1 Delta_2 -> Ty.FirstOrder A -> Ty.FirstOrder B ->
```

```

      FragmentJudgment Gamma Delta_1 M A -> FragmentJudgment Gamma Delta_2 N B ->
      FragmentJudgment Gamma Delta (.pair M N) (.tensor A B)
| unpair {Gamma Delta Delta_1 Delta_2 A B C M K} (hGamma : CtxUAllBit Gamma)
  (hDelta : CtxLAllSomeFragment Delta) :
  OSplit Delta Delta_1 Delta_2 -> Ty.FirstOrder A -> Ty.FirstOrder B ->
  Ty.SemanticFragment C ->
  FragmentJudgment Gamma Delta_1 M (.tensor A B) ->
  FragmentJudgment Gamma Delta_2 K (.arrow .lin A (.arrow .lin B C)) ->
  FragmentJudgment Gamma Delta (.unpair M K) C
| ite {Gamma Delta Delta_1 Delta_2 A B T E} (hGamma : CtxUAllBit Gamma)
  (hDelta : CtxLAllSomeFragment Delta) :
  OSplit Delta Delta_1 Delta_2 -> Ty.SemanticFragment A ->
  FragmentJudgment Gamma Delta_1 B .bit -> FragmentJudgment Gamma Delta_2 T A
->
  FragmentJudgment Gamma Delta_2 E A ->
  FragmentJudgment Gamma Delta (.ite B T E) A
| measure {Gamma Delta Delta_1 Delta_2 A Q K} (hGamma : CtxUAllBit Gamma)
  (hDelta : CtxLAllSomeFragment Delta) :
  OSplit Delta Delta_1 Delta_2 -> Ty.SemanticFragment A ->
  FragmentJudgment Gamma Delta_1 Q .qubit ->
  FragmentJudgment Gamma Delta_2 K (.arrow .unres .bit (.arrow .lin .qubit A)) ->
  FragmentJudgment Gamma Delta (.measure Q K) A

```

### 5.3.193 Reconstruct the canonical fragment judgment from ordinary typing plus the explicit context

**Statement.** Reconstruct the canonical fragment judgment from ordinary typing plus the explicit context, binder, and result-fragment side conditions.

**Proof.** The claim follows from the definitions of the objects involved.

#### Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```

theorem fragmentJudgment_of_hasType :
  forall {Gamma Delta M A}, HasType Gamma Delta M A ->
    CtxUAllBit Gamma -> CtxLAllSomeFragment Delta ->
    FragmentBinders M -> Ty.SemanticFragment A ->
    FragmentJudgment Gamma Delta M A
| _, _, _, _, .varU hl hd hn, hGamma, hDelta, _, hA =>
  .varU hGamma hDelta hl hd hn hA
| _, _, _, _, .varL hl ho, hGamma, hDelta, _, hA =>
  .varL hGamma hDelta hl ho hA
| _, _, _, _, .lamU had hd hn h, hGamma, hDelta, hb, hA => by
  have hbit := FragmentBinders.lamUnres_bit hb
  subst hbit
  exact .lamU hGamma hDelta had hd hn hA
  (fragmentJudgment_of_hasType h (CtxUAllBit.cons hGamma) hDelta
    (FragmentBinders.lamUnres_body hb)
    (Ty.SemanticFragment.arrow_unres_cod hA))
| _, _, _, _, .lamL had h, hGamma, hDelta, hb, hA => by
  obtain <hdom, hcod> := Ty.SemanticFragment.arrow_lin_inv hA
  exact .lamL hGamma hDelta had hdom hcod
  (fragmentJudgment_of_hasType h hGamma
    (CtxLAllSomeFragment.cons_some
      (Ty.SemanticFragment.of_firstOrder hdom) hDelta)
    (FragmentBinders.lamLin_body hb) hcod)

```

```

| _, _, _, _, .appL hs hF hX, hGamma, hDelta, hb, hB => by
  have hdomains :=
    FragmentArrowDomains.of_hasType hF hGamma
      (CtxLAllSomeFragment.of_oSplit_left hDelta hs)
      (FragmentBinders.app_left hb)
  exact .appL hGamma hDelta hs hdomains.1 hB
    (fragmentJudgment_of_hasType hF hGamma
      (CtxLAllSomeFragment.of_oSplit_left hDelta hs)
      (FragmentBinders.app_left hb)
      (.arrowLin hdomains.1 hB))
    (fragmentJudgment_of_hasType hX hGamma
      (CtxLAllSomeFragment.of_oSplit_right hDelta hs)
      (FragmentBinders.app_right hb)
      (Ty.SemanticFragment.of_firstOrder hdomains.1))
| _, _, _, _, .appU hs hn hF hX, hGamma, hDelta, hb, hB => by
  have hdomains :=
    FragmentArrowDomains.of_hasType hF hGamma
      (CtxLAllSomeFragment.of_oSplit_left hDelta hs)
      (FragmentBinders.app_left hb)
  have hbit := hdomains.1
  subst hbit
  exact .appU hGamma hDelta hs hn hB
    (fragmentJudgment_of_hasType hF hGamma
      (CtxLAllSomeFragment.of_oSplit_left hDelta hs)
      (FragmentBinders.app_left hb) (.arrowUnresBit hB))
    (fragmentJudgment_of_hasType hX hGamma
      (CtxLAllSomeFragment.of_oSplit_right hDelta hs)
      (FragmentBinders.app_right hb) Ty.SemanticFragment.bit)
| _, _, _, _, .unit hn, hGamma, hDelta, _, _ =>
  .unit hGamma hDelta hn
| _, _, _, _, .bitLit hn, hGamma, hDelta, _, _ =>
  .bitLit hGamma hDelta _ hn
| _, _, _, _, .pair hs hM hN, hGamma, hDelta, hb, hAB => by
  obtain <hA, hB> := Ty.SemanticFragment.tensor_firstOrder hAB
  exact .pair hGamma hDelta hs hA hB
    (fragmentJudgment_of_hasType hM hGamma
      (CtxLAllSomeFragment.of_oSplit_left hDelta hs)
      (FragmentBinders.pair_left hb)
      (Ty.SemanticFragment.of_firstOrder hA))
    (fragmentJudgment_of_hasType hN hGamma
      (CtxLAllSomeFragment.of_oSplit_right hDelta hs)
      (FragmentBinders.pair_right hb)
      (Ty.SemanticFragment.of_firstOrder hB))
| _, _, _, _, .unpair hs hM hK, hGamma, hDelta, hb, hC => by
  have hdomains :=
    FragmentArrowDomains.of_hasType hK hGamma
      (CtxLAllSomeFragment.of_oSplit_right hDelta hs)
      (FragmentBinders.unpair_right hb)
  exact .unpair hGamma hDelta hs hdomains.1 hdomains.2.1 hC
    (fragmentJudgment_of_hasType hM hGamma
      (CtxLAllSomeFragment.of_oSplit_left hDelta hs)
      (FragmentBinders.unpair_left hb)
      (Ty.SemanticFragment.tensor hdomains.1 hdomains.2.1))
    (fragmentJudgment_of_hasType hK hGamma
      (CtxLAllSomeFragment.of_oSplit_right hDelta hs)
      (FragmentBinders.unpair_right hb))

```



```

      (.arrowLin hdomains.1 (.arrowLin hdomains.2.1 hC))
| _, _, _, _, .ite hs hB hT hE, hGamma, hDelta, hb, hA =>
  .ite hGamma hDelta hs hA
  (fragmentJudgment_of_hasType hB hGamma
   (CtxLAllSomeFragment.of_oSplit_left hDelta hs)
   (FragmentBinders.ite_cond hb) Ty.SemanticFragment.bit)
  (fragmentJudgment_of_hasType hT hGamma
   (CtxLAllSomeFragment.of_oSplit_right hDelta hs)
   (FragmentBinders.ite_then hb) hA)
  (fragmentJudgment_of_hasType hE hGamma
   (CtxLAllSomeFragment.of_oSplit_right hDelta hs)
   (FragmentBinders.ite_else hb) hA)
| _, _, _, _, .prim hn, hGamma, hDelta, _, _ =>
  .prim hGamma hDelta _ hn
| _, _, _, _, .measure hs hQ hK, hGamma, hDelta, hb, hA =>
  .measure hGamma hDelta hs hA
  (fragmentJudgment_of_hasType hQ hGamma
   (CtxLAllSomeFragment.of_oSplit_left hDelta hs)
   (FragmentBinders.measure_qubit hb) Ty.SemanticFragment.qubit)
  (fragmentJudgment_of_hasType hK hGamma
   (CtxLAllSomeFragment.of_oSplit_right hDelta hs)
   (FragmentBinders.measure_cont hb)
   (.arrowUnresBit (.arrowLin .qubit hA)))
| _, _, _, _, .fix _ _ _ _, _, _, hb, _ => False.elim hb
| _, _, _, _, .fold _ _ _ _, _, _, hb, _ => False.elim hb
| _, _, _, _, .unfold _ _ _ _, _, _, hb, _ => False.elim hb

```

### 5.3.194 Every fragment judgment yields a certificate (Gate 1 completeness)

**Statement.** Every fragment judgment yields a certificate (Gate 1 completeness). Formally:  $\text{Nonempty} (\text{FragCert } \Gamma \Delta M A)$ .

**Proof.** By induction on  $j$ . For a unit, a bit literal, a primitive, an unrestricted variable and a linear variable, the claim is checked directly; for an unrestricted lambda abstraction, a linear lambda abstraction, a linear application, an unrestricted application, a pair, a pair elimination, a conditional and a measurement, the claim follows from the induction hypothesis.

#### Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```

theorem exists_ofFragmentJudgment {Gamma Delta M A}
  (j : FragmentJudgment Gamma Delta M A) : Nonempty (FragCert Gamma Delta M A) := by
  induction j with
| unit hGamma hDelta h => exact <.unit hGamma hDelta h>
| bitLit hGamma hDelta b h => exact <.bitLit hGamma hDelta b h>
| prim hGamma hDelta p h => exact <.prim hGamma hDelta p h>
| varU hGamma hDelta hL hD hN hA => exact <.varU hGamma hDelta hL hD hN hA>
| varL hGamma hDelta hL hO hA => exact <.varL hGamma hDelta hL hO hA>
| lamU hGamma hDelta hAd hDup hN hArr _ ih =>
  obtain <c> := ih; exact <.lamU hGamma hDelta hAd hDup hN hArr c>
| lamL hGamma hDelta hAd hFO hB _ ih =>
  obtain <c> := ih; exact <.lamL hGamma hDelta hAd hFO hB c>
| appL hGamma hDelta hS hFO hB _ _ ihF ihX =>
  obtain <cF> := ihF; obtain <cX> := ihX
  exact <.appL hGamma hDelta hS hFO hB cF cX>
| appU hGamma hDelta hS hN hB _ _ ihF ihX =>

```

```

    obtain <cF> := ihF; obtain <cX> := ihX
    exact <.appU hGamma hDelta hS hN hB cF cX>
| pair hGamma hDelta hS hA hB _ _ ihM ihN =>
    obtain <cM> := ihM; obtain <cN> := ihN
    exact <.pair hGamma hDelta hS hA hB cM cN>
| unpair hGamma hDelta hS hA hB hC _ _ ihM ihK =>
    obtain <cM> := ihM; obtain <cK> := ihK
    exact <.unpair hGamma hDelta hS hA hB hC cM cK>
| ite hGamma hDelta hS hA _ _ ihB ihT ihE =>
    obtain <cB> := ihB; obtain <cT> := ihT; obtain <cE> := ihE
    exact <.ite hGamma hDelta hS hA cB cT cE>
| measure hGamma hDelta hS hA _ _ ihQ ihK =>
    obtain <cQ> := ihQ; obtain <cK> := ihK
    exact <.measure hGamma hDelta hS hA cQ cK>

```

### 5.3.195 Every fragment judgment yields a certificate

**Definition.** Every fragment judgment yields a certificate.

**Construction.** Defined to be `(exists_ofFragmentJudgment j).some`.

**Lean 4 source** [QLambda/Linear/FragmentDenotation.lean](#)

```

noncomputable def ofFragmentJudgment {Gamma Delta M A}
  (j : FragmentJudgment Gamma Delta M A) : FragCert Gamma Delta M A :=
  (exists_ofFragmentJudgment j).some

```

### 5.3.196 Erasure of certificates into the propositional fragment judgment

**Statement.** Erasure of certificates into the propositional fragment judgment. Formally: `FragmentJudgment  $\Gamma$   $\Delta$  M A`.

**Proof.** By induction on `c`. For a unit, a bit literal, a primitive, an unrestricted variable and a linear variable, the claim is checked directly; for an unrestricted lambda abstraction, a linear lambda abstraction, a linear application, an unrestricted application, a pair, a pair elimination, a conditional and a measurement, the claim follows from the induction hypothesis.

**Lean 4 source** [QLambda/Linear/FragmentDenotation.lean](#)

```

theorem toFragmentJudgment {Gamma Delta M A} (c : FragCert Gamma Delta M A) :
  FragmentJudgment Gamma Delta M A := by
  induction c with
  | unit hGamma hDelta h => exact .unit hGamma hDelta h
  | bitLit hGamma hDelta b h => exact .bitLit hGamma hDelta b h
  | prim hGamma hDelta p h => exact .prim hGamma hDelta p h
  | varU hGamma hDelta hL hD hN hA => exact .varU hGamma hDelta hL hD hN hA
  | varL hGamma hDelta hL hO hA => exact .varL hGamma hDelta hL hO hA
  | lamU hGamma hDelta hAd hDup hN hArr _ ih => exact .lamU hGamma hDelta hAd hDup hN
    hArr ih
  | lamL hGamma hDelta hAd hFO hB _ ih => exact .lamL hGamma hDelta hAd hFO hB ih
  | appL hGamma hDelta hS hFO hB _ _ ihF ihX => exact .appL hGamma hDelta hS hFO hB
    ihF ihX
  | appU hGamma hDelta hS hN hB _ _ ihF ihX => exact .appU hGamma hDelta hS hN hB ihF
    ihX

```

```

| pair hGamma hDelta hS hA hB _ _ ihM ihN => exact .pair hGamma hDelta hS hA hB ihM
ihN
| unpair hGamma hDelta hS hA hB hC _ _ ihM ihK =>
  exact .unpair hGamma hDelta hS hA hB hC ihM ihK
| ite hGamma hDelta hS hA _ _ ihB ihT ihE => exact .ite hGamma hDelta hS hA ihB
ihT ihE
| measure hGamma hDelta hS hA _ _ ihQ ihK => exact .measure hGamma hDelta hS hA ihQ
ihK

```

### 5.3.197 Round-trip: fragment judgment $\leftrightarrow$ certificate (Gate 1)

**Statement.** Round-trip: fragment judgment  $\leftrightarrow$  certificate (Gate 1). Formally: `Nonempty (FragCert  $\Gamma$   $\Delta$  M A)`.

**Proof.** This is an instance of the fact that every fragment judgment yields a certificate (Gate 1 completeness).

**Lean 4 source** [QLambda/Linear/FragmentDenotation.lean](#)

```

theorem ofHasType_complete {Gamma Delta M A} (j : FragmentJudgment Gamma Delta M A) :
  Nonempty (FragCert Gamma Delta M A) :=
  exists_ofFragmentJudgment j

```

### 5.3.198 Build a certificate from the propositional fragment judgment

**Definition.** Build a certificate from the propositional fragment judgment.

**Construction.** Defined to be the passage from a fragment typing judgement of `j`.

**Lean 4 source** [QLambda/Linear/FragmentDenotation.lean](#)

```

noncomputable def ofHasType {Gamma Delta M A} (j : FragmentJudgment Gamma Delta M A) :
  FragCert Gamma Delta M A :=
  ofFragmentJudgment j

```

### 5.3.199 Closed fragment certificate: empty contexts

**Definition.** Closed fragment certificate: empty contexts.

**Construction.** Defined to be `FragCert [] [] M A`.

**Lean 4 source** [QLambda/Linear/FragmentDenotation.lean](#)

```

abbrev Closed (M : Term) (A : Ty) := FragCert [] [] M A

```

### 5.3.200 Closed unit certificate

**Definition.** Closed unit certificate.

**Construction.** Defined to be the unit of the empty list, the empty list, `trivial`.

**Lean 4 source** [QLambda/Linear/FragmentDenotation.lean](#)

```
def closed_unit_cert : Closed .unit .unit :=
  .unit CtxUAllBit.nil CtxLAllSomeFragment.nil trivial
```

### 5.3.201 Closed bit-literal certificate

**Definition.** Closed bit-literal certificate.

**Construction.** Defined to be `.bitLit CtxUAllBit.nil CtxLAllSomeFragment.nil b trivial`.

**Lean 4 source** [QLambda/Linear/FragmentDenotation.lean](#)

```
def closed_bitLit_cert (b : Bool) : Closed (.bitLit b) .bit :=
  .bitLit CtxUAllBit.nil CtxLAllSomeFragment.nil b trivial
```

### 5.3.202 Closed primitive certificate

**Definition.** Closed primitive certificate.

**Construction.** Defined to be `.prim CtxUAllBit.nil CtxLAllSomeFragment.nil p trivial`.

**Lean 4 source** [QLambda/Linear/FragmentDenotation.lean](#)

```
def closed_prim_cert (p : Prim) : Closed (.prim p) (primTy p) :=
  .prim CtxUAllBit.nil CtxLAllSomeFragment.nil p trivial
```

### 5.3.203 The closed term unit certificate uniqueness

**Statement.** `c = closed_unit_cert`. Formally: `c = closed_unit_cert`.

**Proof.** By case analysis on `c`.

**Lean 4 source** [QLambda/Linear/FragmentDenotation.lean](#)

```
theorem closed_unit_cert_unique (c : Closed .unit .unit) :
  c = closed_unit_cert := by
  cases c
  rfl
```

### 5.3.204 Uniqueness of the closed term of the bit literal of the certificate

**Statement.** For a bit `b`: `c` equals the closed term bit lit certificate of `b`.

**Proof.** By case analysis on `c`.

**Lean 4 source** [QLambda/Linear/FragmentDenotation.lean](#)

```
theorem closed_bitLit_cert_unique {b : Bool} (c : Closed (.bitLit b) .bit) :
  c = closed_bitLit_cert b := by
  cases c
  rfl
```

### 5.3.205 The closed term primitive certificate uniqueness

**Statement.** For a primitive  $p$ :  $c$  equals the closed term primitive certificate of  $p$ .

**Proof.** By case analysis on  $c$ .

**Lean 4 source** [QLambda/Linear/FragmentDenotation.lean](#)

```
theorem closed_prim_cert_unique {p : Prim} (c : Closed (.prim p) (primTy p)) :  
  c = closed_prim_cert p := by  
  cases c  
  rfl
```

### 5.3.206 Closed unit/bit/prim judgments inhabit fragment typing judgement

**Statement.** Closed unit/bit/prim judgments inhabit `FragmentJudgment`. Formally: `FragmentJudgment [] [] .unit .unit`.

**Proof.** Built directly by the a unit rule.

**Lean 4 source** [QLambda/Linear/FragmentDenotation.lean](#)

```
theorem fragmentJudgment_closed_unit :  
  FragmentJudgment [] [] .unit .unit :=  
  .unit CtxUAllBit.nil CtxLAllSomeFragment.nil trivial
```

### 5.3.207 Fragment typing judgement of the closed term of the bit literal for fragment certificates

**Statement.** For a bit  $b$ : `FragmentJudgment [] [] (.bitLit b) .bit`. Formally: `FragmentJudgment [] [] (.bitLit b) .bit`.

**Proof.** Built directly by the a bit literal rule.

**Lean 4 source** [QLambda/Linear/FragmentDenotation.lean](#)

```
theorem fragmentJudgment_closed_bitLit (b : Bool) :  
  FragmentJudgment [] [] (.bitLit b) .bit :=  
  .bitLit CtxUAllBit.nil CtxLAllSomeFragment.nil b trivial
```

### 5.3.208 Fragment typing judgement of the closed term of the primitive for fragment certificates

**Statement.** For a primitive  $p$ : `FragmentJudgment [] [] (.prim p) (primTy p)`.

**Proof.** Built directly by the a primitive rule.

**Lean 4 source** [QLambda/Linear/FragmentDenotation.lean](#)

```
theorem fragmentJudgment_closed_prim (p : Prim) :  
  FragmentJudgment [] [] (.prim p) (primTy p) :=  
  .prim CtxUAllBit.nil CtxLAllSomeFragment.nil p trivial
```

### 5.3.209 Denotation of closed unit certificates

**Definition.** Denotation of closed unit certificates.

**Construction.** Defined to be the unit introduction.

**Lean 4 source** [QLambda/Linear/FragmentDenotation.lean](#)

```
noncomputable def denoteUnit
  (_c : Closed .unit .unit) :
  Hom dayTensorUnit (representable 1) :=
  routeAFragmentModel.unitIntro
```

### 5.3.210 Denotation of closed bit-literal certificates

**Definition.** Denotation of closed bit-literal certificates.

**Construction.** Defined to be the bit literal of b.

**Lean 4 source** [QLambda/Linear/FragmentDenotation.lean](#)

```
noncomputable def denoteBitLit {b : Bool}
  (_c : Closed (.bitLit b) .bit) :
  Hom dayTensorUnit (representable 2) :=
  routeAFragmentModel.bitLit b
```

### 5.3.211 Formula for the denotation unit

**Statement.** The denotation unit of  $c$  equals the unit introduction. Formally:  $\text{denoteUnit } c = \text{routeAFragmentModel.unitIntro}$ .

**Proof.** By definition. Unfolding the denotation unit turns the left-hand side, the denotation unit of  $c$ , into the right-hand side, the unit introduction; the two sides are the same term.

**Lean 4 source** [QLambda/Linear/FragmentDenotation.lean](#)

```
theorem denoteUnit_eq (c : Closed .unit .unit) :
  denoteUnit c = routeAFragmentModel.unitIntro :=
  rfl
```

### 5.3.212 Formula for the denotation bit lit

**Statement.** For a bit  $b$ : the denotation bit lit of  $c$  equals the bit literal of  $b$ .

**Proof.** By definition. Unfolding the denotation bit lit turns the left-hand side, the denotation bit lit of  $c$ , into the right-hand side, the bit literal of  $b$ ; the two sides are the same term.

**Lean 4 source** [QLambda/Linear/FragmentDenotation.lean](#)

```
theorem denoteBitLit_eq {b : Bool} (c : Closed (.bitLit b) .bit) :
  denoteBitLit c = routeAFragmentModel.bitLit b :=
  rfl
```

### 5.3.213 Closed denotation into the combined empty context

**Definition.** Closed denotation into the combined empty context.

**Construction.** Defined to be the closed term point of the denotation unit of  $c$ .

**Lean 4 source** [QLambda/Linear/FragmentDenotation.lean](#)

```
noncomputable def denoteClosedUnit (c : Closed .unit .unit) :  
  Hom (FragmentContext.combined [] []) (fragmentModule .unit) :=  
  FragmentContext.closedPoint (denoteUnit c)
```

### 5.3.214 Definition of the denotation closed term bit lit of fragment certificates

**Definition.** The denotation closed term bit lit of  $c$  is a module morphism from `FragmentContext.combined [] []` to `fragmentModule .bit`.

**Construction.** Defined to be the closed term point of the denotation bit lit of  $c$ .

**Lean 4 source** [QLambda/Linear/FragmentDenotation.lean](#)

```
noncomputable def denoteClosedBitLit {b : Bool} (c : Closed (.bitLit b) .bit) :  
  Hom (FragmentContext.combined [] []) (fragmentModule .bit) :=  
  FragmentContext.closedPoint (denoteBitLit c)
```

### 5.3.215 Formula for the denotation closed term unit

**Statement.** The denotation closed term unit of  $c$  equals the closed term point of the unit introduction.

**Proof.** The goal is simplified using the definition of the denotation closed term unit and the definition of the denotation unit.

**Lean 4 source** [QLambda/Linear/FragmentDenotation.lean](#)

```
theorem denoteClosedUnit_eq (c : Closed .unit .unit) :  
  denoteClosedUnit c =  
    FragmentContext.closedPoint routeAFragmentModel.unitIntro := by  
  simp [denoteClosedUnit, denoteUnit]
```

### 5.3.216 Formula for the denotation closed term bit lit

**Statement.** For a bit  $b$ : the denotation closed term bit lit of  $c$  equals the closed term point of the bit literal of  $b$ .

**Proof.** The goal is simplified using the definition of the denotation closed term bit lit and the definition of the denotation bit lit.

**Lean 4 source** [QLambda/Linear/FragmentDenotation.lean](#)

```
theorem denoteClosedBitLit_eq {b : Bool} (c : Closed (.bitLit b) .bit) :  
  denoteClosedBitLit c =  
    FragmentContext.closedPoint (routeAFragmentModel.bitLit b) := by  
  simp [denoteClosedBitLit, denoteBitLit]
```

### 5.3.217 A primitive constant, curried into its source-language linear-arrow type

**Definition.** A primitive constant, curried into its source-language linear-arrow type.

**Construction.** Constructed interactively; by case analysis on the primitive  $p$ . For fresh-qubit allocation, the Pauli-X gate, the Hadamard gate, the T gate, a Y-rotation, the controlled-NOT gate and reset, the claim is checked directly. It follows from the definition of the currying first order.

#### Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```
noncomputable def denotePrimPoint (p : Prim) :
  Hom dayTensorUnit (fragmentModule (primTy p)) := by
  cases p with
  | new0 =>
    exact FragmentContext.curryFirstOrder 1
      (Hom.comp (routeAFragmentModel.primMap .new0)
        (DayTensor.leftUnitor (representable 1)))
  | x =>
    exact FragmentContext.curryFirstOrder 2
      (Hom.comp (routeAFragmentModel.primMap .x)
        (DayTensor.leftUnitor (representable 2)))
  | h =>
    exact FragmentContext.curryFirstOrder 2
      (Hom.comp (routeAFragmentModel.primMap .h)
        (DayTensor.leftUnitor (representable 2)))
  | t =>
    exact FragmentContext.curryFirstOrder 2
      (Hom.comp (routeAFragmentModel.primMap .t)
        (DayTensor.leftUnitor (representable 2)))
  | ry ? =>
    exact FragmentContext.curryFirstOrder 2
      (Hom.comp (routeAFragmentModel.primMap (.ry ?))
        (DayTensor.leftUnitor (representable 2)))
  | cx =>
    let inner :
      Hom (representable 2)
        (internalHomRepresentable 2 (representable 4)) :=
      FragmentContext.curryFirstOrder 2
        (Hom.comp (routeAFragmentModel.primMap .cx)
          (dayTensorRepresentableIso 2 2).hom)
    exact FragmentContext.curryFirstOrder 2
      (Hom.comp inner (DayTensor.leftUnitor (representable 2)))
  | reset =>
    exact FragmentContext.curryFirstOrder 2
      (Hom.comp (routeAFragmentModel.primMap .reset)
        (DayTensor.leftUnitor (representable 2)))
```

### 5.3.218 Retained computational-basis measurement

**Definition.** Retained computational-basis measurement: the first output is the classical outcome and the second is the post-measurement qubit.

**Construction.** Defined by an explicit formula built from the composition, the Day tensor product representable isomorphism, the Yoneda image and the bit copy superoperator.

#### Lean 4 source `QLambda/Linear/FragmentDenotation.lean`



```

noncomputable def retainedMeasurement :
  Hom (representable 2)
    (dayTensor (representable 2) (representable 2)) :=
Hom.comp (dayTensorRepresentableIso 2 2).inv
  (yonedaMap
    (Superoperator.comp bitCopySuperoperator bitDephaseSuperoperator))

```

### 5.3.219 Apply a measurement continuation to the retained outcome and qubit

**Definition.** Apply a measurement continuation to the retained outcome and qubit. The outcome crosses the explicit physical-to-classical boundary before unrestricted evaluation.

**Construction.** Defined by an explicit formula built from the composition, the evaluation first order, the functorial action and the evaluation unrestricted bit.

**Lean 4 source** [QLambda/Linear/FragmentDenotation.lean](#)

```

noncomputable def measureElim (N : Module) :
  Hom
    (dayTensor (fragmentModule .qubit)
      (dayInternalHom classicalBitModule
        (internalHomRepresentable 2 N)))
    N :=
Hom.comp (FragmentContext.evalFirstOrder 2 N)
  (Hom.comp
    (DayTensor.map
      (FragmentContext.evalUnrestrictedBit
        (internalHomRepresentable 2 N))
      (Hom.id (representable 2)))
    (Hom.comp
      (DayTensor.associatorInv
        (dayInternalHom classicalBitModule
          (internalHomRepresentable 2 N))
        (representable 2) (representable 2))
      (Hom.comp
        (DayTensor.map (Hom.id _) retainedMeasurement)
        (DayTensor.braiding (representable 2)
          (dayInternalHom classicalBitModule
            (internalHomRepresentable 2 N)))))))

```

### 5.3.220 Full compositional denotation relative only to a genuine `ite` eliminator

**Definition.** Full compositional denotation relative only to a genuine `ite` eliminator. All other constructors are concrete.

**Construction.** Defined by cases on the input:  $\_, \_, \_, \_, \text{.unit } h\Gamma \_ h\Delta \mapsto$  the combined point of  $h\Gamma$ ,  $h\Delta$ , the unit introduction;  $\_, \_, \_, \_, \text{.bitLit } h\Gamma \_ b \_ h\Delta \mapsto$  the combined point of  $h\Gamma$ ,  $h\Delta$ , the bit literal of  $b$ ;  $\_, \_, \_, \_, \text{.prim } h\Gamma \_ p \_ h\Delta \mapsto$  the combined point of  $h\Gamma$ ,  $h\Delta$ , the denotation primitive point of  $p$ ;  $\_, \_, \_, \_, \text{.varU } h\Gamma \_ h1 \_ h\Delta \_ \mapsto$  the combined context lookup unrestricted of  $h\Gamma$ ,  $h1$ ,  $h\Delta$ ;  $\_, \_, \_, \_, \text{.varL } h\Gamma \_ h1 \_ ho \_ \mapsto$  the combined context lookup linear of  $h\Gamma$ ,  $h1$ ,  $ho$ ;  $\_, \_, \_, \_, \text{.lamU } \_ \_ \_ \_ \_ hArr \_ c \mapsto$  by;  $\_, \_, \_, \_, \text{.lamL } \_ \_ \_ hA \_ c \mapsto$  the abstract linear of  $hA$  and the denotation with of branching and

$c; \_ , \_ , \_ , \_ , \_ .appL \ h\Gamma \ \_ \ hs \ hA \ \_ \ cF \ cX \mapsto$  the composition of the evaluation fragment first order of  $hA$  and  $\_$ ; and so on for the remaining cases.

#### Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```
noncomputable def denoteWith (branching : FragmentBranching) :
  {Gamma : List Ty} -> {Delta : List (Option Ty)} -> {M : Term} -> {A : Ty}
  ->
  FragCert Gamma Delta M A ->
  Hom (FragmentContext.combined Gamma Delta) (fragmentModule A)
| _, _, _, _, .unit hGamma _ hDelta =>
  FragmentContext.combinedPoint hGamma hDelta routeAFragmentModel.unitIntro
| _, _, _, _, .bitLit hGamma _ b hDelta =>
  FragmentContext.combinedPoint hGamma hDelta (routeAFragmentModel.bitLit b)
| _, _, _, _, .prim hGamma _ p hDelta =>
  FragmentContext.combinedPoint hGamma hDelta (denotePrimPoint p)
| _, _, _, _, .varU hGamma _ hl _ hDelta _ =>
  FragmentContext.combinedLookupUnrestricted hGamma hl hDelta
| _, _, _, _, .varL hGamma _ hl ho _ =>
  FragmentContext.combinedLookupLinear hGamma hl ho
| _, _, _, _, .lamU _ _ _ _ hArr c => by
  have hdom : _ = Ty.bit := Ty.SemanticFragment.arrow_unres_eq hArr
  subst hdom
  exact FragmentContext.abstractUnrestricted (denoteWith branching c)
| _, _, _, _, .lamL _ _ _ hA _ c =>
  FragmentContext.abstractLinear hA (denoteWith branching c)
| _, _, _, _, .appL hGamma _ hs hA _ cF cX =>
  Hom.comp (FragmentContext.evalFragmentFirstOrder hA _)
  (Hom.comp
    (DayTensor.map (denoteWith branching cF)
      (denoteWith branching cX))
    (FragmentContext.combinedOSplit hGamma hs))
| _, _, _, _, .appU hGamma _ hs _ _ cF cX =>
  Hom.comp (FragmentContext.evalUnrestrictedBit _)
  (Hom.comp
    (DayTensor.map (denoteWith branching cF)
      (denoteWith branching cX))
    (FragmentContext.combinedOSplit hGamma hs))
| _, _, _, _, .pair hGamma _ hs hA hB cM cN =>
  Hom.comp (FragmentContext.tensorIntro hA hB)
  (Hom.comp
    (DayTensor.map (denoteWith branching cM)
      (denoteWith branching cN))
    (FragmentContext.combinedOSplit hGamma hs))
| _, _, _, _, .unpair hGamma _ hs hA hB _ cM cK =>
  Hom.comp (FragmentContext.unpairApply hA hB _)
  (Hom.comp
    (DayTensor.map (denoteWith branching cM)
      (denoteWith branching cK))
    (FragmentContext.combinedOSplit hGamma hs))
| _, _, _, _, .ite hGamma _ hs hA cB cT cE =>
  Hom.comp (branching.iteElim hA)
  (Hom.comp
    (DayTensor.map (denoteWith branching cB)
      (additivePair (denoteWith branching cT)
        (denoteWith branching cE)))
```

```

      (FragmentContext.combinedOSplit hGamma hs))
| _, _, _, _, .measure hGamma _ hs _ cQ cK =>
  Hom.comp (measureElim _)
    (Hom.comp
      (DayTensor.map (denoteWith branching cQ)
        (denoteWith branching cK))
      (FragmentContext.combinedOSplit hGamma hs))

```

### 5.3.221 Route A supplies closed unit/bit denotation into combined contexts

**Definition.** Route A supplies closed unit/bit denotation into combined contexts.

**Construction.** Constructed by supplying each component of the structure explicitly.

#### Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```

noncomputable def routeAClosedDenotationCore :
  (forall (_c : FragCert.Closed .unit .unit),
    Hom (FragmentContext.combined [] []) (fragmentModule .unit)) x
  (forall (b : Bool) (_c : FragCert.Closed (.bitLit b) .bit),
    Hom (FragmentContext.combined [] []) (fragmentModule .bit)) :=
  <FragCert.denoteClosedUnit, fun _b c => FragCert.denoteClosedBitLit c>

```

### 5.3.222 Passage from a fragment certificate

**Statement.** For a term  $M$ , a type  $A$ :  $A$  is a closed term of the semantic fragment.

**Proof.** The witness is assembled directly from its components, using every certificate implies ordinary typing judgement.

#### Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```

theorem ofFragCert {M : Term} {A : Ty} (c : FragCert [] [] M A) :
  ClosedSemanticFragment M A :=
  <FragCert.toHasType c, FragCert.result_fragment c, FragCert.term_fragment c>

```

### 5.3.223 Exact agreement of Route A primitive maps with primitive superoperator

**Statement.** Exact agreement of Route A primitive maps with `Prim.superoperator`. Formally: `routeAFragmentModel.primMap p = yonedaMap (Prim.superoperator p)`.

**Proof.** The proof term combines the facts named in it directly.

#### Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```

theorem fragment_prim_superoperator (p : Prim) :
  routeAFragmentModel.primMap p = yonedaMap (Prim.superoperator p) :=
  routeAFragmentModel.prim_agrees p

```

### 5.3.224 Exact agreement of Route A primitives with Kraus/completed CP class presentations

**Statement.** Exact agreement of Route A primitives with Kraus/CompletedCP presentations. Formally:  
 $(\text{Prim.superoperator } p).\text{cp} = \text{CMap.ofKraus } p.\text{kraus}.$

**Proof.** This is an instance of the fact that the primitive superoperator has the Kraus presentation of its primitive.

#### Lean 4 source `QLambda/Linear/FragmentDenotation.lean`

```
theorem fragment_prim_completedCP (p : Prim) :  
  (Prim.superoperator p).cp = CMap.ofKraus p.kraus :=  
  Prim.cp_superoperator p
```

### 5.3.225 Operations required for full compositional fragment denotation

**Definition.** Operations required for full compositional fragment denotation.

**Construction.** An element consists of `denote`, `denote_unit` and `denote_bitLit`.

#### Lean 4 source `QLambda/Linear/FragmentDenotationModel.lean`

```
structure FragmentDenotationModel where  
  /-- Open-term denotation on combined contexts. -/  
  denote :  
    forall {Gamma Delta M A}, FragCert Gamma Delta M A ->  
      Hom (FragmentContext.combined Gamma Delta) (fragmentModule A)  
  /-- Closed unit agrees with Route A. -/  
  denote_unit :  
    forall (c : FragCert.Closed .unit .unit),  
      denote c =  
        FragmentContext.closedPoint routeAFragmentModel.unitIntro  
  /-- Closed bit literals agree with Route A. -/  
  denote_bitLit :  
    forall (b : Bool) (c : FragCert.Closed (.bitLit b) .bit),  
      denote c =  
        FragmentContext.closedPoint (routeAFragmentModel.bitLit b)
```

### 5.3.226 Constructor computation equations

**Statement.** `##` Constructor computation equations. Formally:  $\text{FragCert.denote } (.unit \ h\Gamma \ hL \ h\Delta) = \text{FragmentContext.combinedPoint } h\Gamma \ h\Delta \ \text{routeAFragmentModel.unitIntro}.$

**Proof.** By definition. Unfolding the denotation turns the left-hand side, the denotation of the unit of  $h\Gamma$ ,  $hL$ ,  $h\Delta$ , into the right-hand side, the combined point of  $h\Gamma$ ,  $h\Delta$ , the unit introduction; the two sides are the same term.

#### Lean 4 source `QLambda/Linear/FragmentDenoteEq.lean`

```
theorem FragCert.denote_unit_eq {Gamma Delta}  
  (hGamma : CtxUAllBit Gamma) (hL : CtxLAllSomeFragment Delta) (hDelta : AllNone  
  Delta) :  
  FragCert.denote (.unit hGamma hL hDelta) =
```

```

    FragmentContext.combinedPoint hGamma hDelta routeAFragmentModel.unitIntro :=
rfl

```

### 5.3.227 Formula for the denotation of the bit literal

**Statement.** If every unrestricted variable of  $\Gamma$  has bit type; every cell of the linear context  $\Delta$  is occupied by a fragment type; and  $\Delta$  is an empty usage mask, then the denotation of  $\text{.bitLit } h\Gamma \ hL \ b \ h\Delta$  equals the combined point of  $h\Gamma$ ,  $h\Delta$ , the bit literal of  $b$ .

**Proof.** By definition. Unfolding the denotation turns the left-hand side, the denotation of  $\text{.bitLit } h\Gamma \ hL \ b \ h\Delta$ , into the right-hand side, the combined point of  $h\Gamma$ ,  $h\Delta$ , the bit literal of  $b$ ; the two sides are the same term.

#### Lean 4 source `QLambda/Linear/FragmentDenoteEq.lean`

```

theorem FragCert.denote_bitLit_eq {Gamma Delta b}
  (hGamma : CtxUAllBit Gamma) (hL : CtxLAllSomeFragment Delta) (hDelta : AllNone
    Delta) :
  FragCert.denote (.bitLit hGamma hL b hDelta) =
    FragmentContext.combinedPoint hGamma hDelta (routeAFragmentModel.bitLit b) :=
rfl

/-! ## Closed first-order `ite` helpers -/

```

### 5.3.228 Closed bit-literal certificates denote as closed term point

**Statement.** Closed bit-literal certificates denote as `closedPoint (bitLitHom _)`. Formally: `FragCert.denote (FragCert.closed_bitLit_cert b) = FragmentContext.closedPoint (bitLitHom b)`.

**Proof.** The goal is simplified using the definition of the closed term point.

#### Lean 4 source `QLambda/Linear/FragmentDenoteEq.lean`

```

theorem FragCert.closed_bitLit_denote_eq (b : Bool) :
  FragCert.denote (FragCert.closed_bitLit_cert b) =
    FragmentContext.closedPoint (bitLitHom b) := by
  simp only [FragContext.closedPoint]
rfl

```

### 5.3.229 Additive pairing of a composite

**Statement.** For superoperator modules  $L, M, N, P$ , module morphisms  $f, g$ : if  $\text{Hom } P \ L$ , then the composite of the additive pairing of  $f$  and  $g$  after  $h$  equals the additive pairing of the composite of  $f$  after  $h$  and the composite of  $g$  after  $h$ .

**Proof.** Both sides are compared pointwise (by extensionality).

#### Lean 4 source `QLambda/Linear/FragmentDenoteEq.lean`

```

theorem additivePair_comp {L M N P : Module}
  (f : Hom L M) (g : Hom L N) (h : Hom P L) :
  Hom.comp (additivePair f g) h =
    additivePair (Hom.comp f h) (Hom.comp g h) := by
  ext n x
  rfl

```

### 5.3.230 Day-unit inverse unitor as a map into the empty combined context

**Definition.** Day-unit inverse unitor as a map into the empty combined context.

**Construction.** Defined to be the inverse left unitor of the Day tensor unit.

**Lean 4 source** [QLambda/Linear/FragmentDenoteEq.lean](#)

```

noncomputable def FragmentContext.closedLeftUnitorInv :
  Hom dayTensorUnit (FragmentContext.combined [] []) :=
  DayTensor.leftUnitorInv dayTensorUnit

```

### 5.3.231 Formula for the closed term left unitor inverse

**Statement.** The closed term left unitor inverse equals the inverse left unitor of the Day tensor unit. Formally: `FragmentContext.closedLeftUnitorInv = DayTensor.leftUnitorInv dayTensorUnit`.

**Proof.** By definition. Unfolding the closed term left unitor inverse turns the left-hand side, the closed term left unitor inverse, into the right-hand side, the inverse left unitor of the Day tensor unit; the two sides are the same term.

**Lean 4 source** [QLambda/Linear/FragmentDenoteEq.lean](#)

```

theorem FragmentContext.closedLeftUnitorInv_eq :
  FragmentContext.closedLeftUnitorInv =
    DayTensor.leftUnitorInv dayTensorUnit :=
  rfl

```

### 5.3.232 Combined closed term collapse of the inverse left unitor for context interpretations

**Statement.** The composite of the combined closed term collapse after the closed term left unitor inverse equals the identity of the Day tensor unit. Formally: `Hom.comp FragmentContext.combined ClosedCollapse FragmentContext.closedLeftUnitorInv = Hom.id dayTensorUnit`.

**Proof.** The key step rewrites with the fact that the functorial action for Day tensor products preserves identities, the fact that the identity is a right unit for composition for module morphisms and the fact that the left unitor and its inverse compose to the identity.

**Lean 4 source** [QLambda/Linear/FragmentDenoteEq.lean](#)

```

theorem FragmentContext.combinedClosedCollapse_leftUnitorInv :
  Hom.comp FragmentContext.combinedClosedCollapse
    FragmentContext.closedLeftUnitorInv =

```

```

Hom.id dayTensorUnit := by
change Hom.comp
  (Hom.comp (DayTensor.leftUnitor dayTensorUnit)
    (DayTensor.map (Hom.id dayTensorUnit) (Hom.id dayTensorUnit)))
  (DayTensor.leftUnitorInv dayTensorUnit) =
Hom.id dayTensorUnit
rw [DayTensor.map_id, Hom.comp_id, DayTensor.leftUnitor_hom_inv]

```

### 5.3.233 Formula for the denotation of the primitive

**Statement.** If every unrestricted variable of  $\Gamma$  has bit type; every cell of the linear context  $\Delta$  is occupied by a fragment type; and  $\Delta$  is an empty usage mask, then the denotation of  $\text{.prim } h\Gamma \ hL \ p \ h\Delta$  equals the combined point of  $h\Gamma$ ,  $h\Delta$ , the denotation primitive point of  $p$ .

**Proof.** By definition. Unfolding the denotation turns the left-hand side, the denotation of  $\text{.prim } h\Gamma \ hL \ p \ h\Delta$ , into the right-hand side, the combined point of  $h\Gamma$ ,  $h\Delta$ , the denotation primitive point of  $p$ ; the two sides are the same term.

#### Lean 4 source `QLambda/Linear/FragmentDenoteEq.lean`

```

theorem FragCert.denote_prim_eq {Gamma Delta p}
  (hGamma : CtxUAllBit Gamma) (hL : CtxLAllSomeFragment Delta) (hDelta : AllNone
    Delta) :
  FragCert.denote (.prim hGamma hL p hDelta) =
    FragmentContext.combinedPoint hGamma hDelta (FragCert.denotePrimPoint p) :=
rfl

```

### 5.3.234 Formula for the denotation of the conditional

**Statement.** If every unrestricted variable of  $\Gamma$  has bit type; every cell of the linear context  $\Delta$  is occupied by a fragment type;  $\Delta$  splits into the left part  $\Delta_1$  and the right part  $\Delta_2$ ; and  $A$  lies in the semantic fragment, then the denotation of  $\text{.ite } h\Gamma \ h\Delta \ hs \ hA \ cB \ cT \ cE$  equals an explicit expression in the composition, the conditional elimination, the functorial action and the denotation.

**Proof.** By definition. Unfolding the denotation turns the left-hand side, the denotation of  $\text{.ite } h\Gamma \ h\Delta \ hs \ hA \ cB \ cT \ cE$ , into the right-hand side, an explicit expression in the composition, the conditional elimination, the functorial action and the denotation; the two sides are the same term.

#### Lean 4 source `QLambda/Linear/FragmentDenoteEq.lean`

```

theorem FragCert.denote_ite_eq {Gamma Delta Delta_1 Delta_2 A B T E}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hA : Ty.SemanticFragment A)
  (cB : FragCert Gamma Delta_1 B .bit) (cT : FragCert Gamma Delta_2 T A)
  (cE : FragCert Gamma Delta_2 E A) :
  FragCert.denote (.ite hGamma hDelta hs hA cB cT cE) =
    Hom.comp (routeAFragmentBranching.iteElim hA)
      (Hom.comp
        (DayTensor.map (FragCert.denote cB)
          (additivePair (FragCert.denote cT) (FragCert.denote cE)))
        (FragmentContext.combinedOSplit hGamma hs)) :=
rfl

```

```
/-! ## Closed first-order `ite` Step soundness -/
```

### 5.3.235 Representable-level closed $\text{ite } \beta$ after packing through $\lambda^{-1} \otimes \lambda^{-1}$

**Statement.** Representable-level closed  $\text{ite } \beta$  after packing through  $\lambda^{-1} \otimes \lambda^{-1}$ .

**Proof.** By case analysis on the bit  $b$ . For true and false, the claim is checked directly. The key step rewrites with the combined closed term collapse of the inverse left unitor for context interpretations, the fact that the identity is a right unit for composition for module morphisms, the conditional elimination representable of a composite of the bit literal and the fact that observational equality is transitive.

#### Lean 4 source `QLambda/Linear/FragmentDenoteEq.lean`

```
private theorem iteElimRepresentable_closed_bitLit_aux (d : Nat) (b : Bool)
  (T E : Hom (FragmentContext.combined [] []) (representable d)) :
  Hom.comp (iteElimRepresentable d)
    (Hom.comp
      (DayTensor.map
        (Hom.comp (bitLitHom b) FragmentContext.combinedClosedCollapse)
        (additivePair T E))
      (DayTensor.map FragmentContext.closedLeftUnitorInv
        FragmentContext.closedLeftUnitorInv)) =
    (bif b then T else E) := by
have hsplit :
  Hom.comp
    (DayTensor.map
      (Hom.comp (bitLitHom b) FragmentContext.combinedClosedCollapse)
      (additivePair T E))
    (DayTensor.map FragmentContext.closedLeftUnitorInv
      FragmentContext.closedLeftUnitorInv) =
    DayTensor.map (bitLitHom b)
      (additivePair
        (Hom.comp T FragmentContext.closedLeftUnitorInv)
        (Hom.comp E FragmentContext.closedLeftUnitorInv)) := by
have h :=
  (DayTensor.map_comp
    (Hom.comp (bitLitHom b) FragmentContext.combinedClosedCollapse)
    FragmentContext.closedLeftUnitorInv
    (additivePair T E)
    FragmentContext.closedLeftUnitorInv).symm
refine h.trans ?_
have hb :
  Hom.comp
    (Hom.comp (bitLitHom b) FragmentContext.combinedClosedCollapse)
    FragmentContext.closedLeftUnitorInv =
    bitLitHom b := by
change Hom.comp (bitLitHom b)
  (Hom.comp FragmentContext.combinedClosedCollapse
    FragmentContext.closedLeftUnitorInv) =
  bitLitHom b
rw [FragmentContext.combinedClosedCollapse_leftUnitorInv, Hom.comp_id]
have hp :
  Hom.comp (additivePair T E) FragmentContext.closedLeftUnitorInv =
  additivePair
    (Hom.comp T FragmentContext.closedLeftUnitorInv)
```



```

      (Hom.comp E FragmentContext.closedLeftUnitorInv) :=
    additivePair_comp T E _
  rw [hb, hp]
  rw [hsplit, iteElimRepresentable_comp_bitLit d b
    (Hom.comp T FragmentContext.closedLeftUnitorInv)
    (Hom.comp E FragmentContext.closedLeftUnitorInv)]
  have hinj :
    Hom.comp FragmentContext.closedLeftUnitorInv
      (DayTensor.leftUnitor dayTensorUnit) =
    Hom.id (FragmentContext.combined [] []) :=
    (DayTensor.leftUnitorIso dayTensorUnit).inv_hom
  cases b with
  | true =>
    have h1 :
      Hom.comp T
        (Hom.comp FragmentContext.closedLeftUnitorInv
          (DayTensor.leftUnitor dayTensorUnit)) =
      Hom.comp T (Hom.id _) :=
      congrArg (Hom.comp T) hinj
    have h2 :
      Hom.comp
        (Hom.comp T FragmentContext.closedLeftUnitorInv)
        (DayTensor.leftUnitor dayTensorUnit) =
      Hom.comp T
        (Hom.comp FragmentContext.closedLeftUnitorInv
          (DayTensor.leftUnitor dayTensorUnit)) :=
      (Hom.comp_assoc _ _ _).symm
    exact h2.trans (h1.trans (Hom.comp_id T))
  | false =>
    have h1 :
      Hom.comp E
        (Hom.comp FragmentContext.closedLeftUnitorInv
          (DayTensor.leftUnitor dayTensorUnit)) =
      Hom.comp E (Hom.id _) :=
      congrArg (Hom.comp E) hinj
    have h2 :
      Hom.comp
        (Hom.comp E FragmentContext.closedLeftUnitorInv)
        (DayTensor.leftUnitor dayTensorUnit) =
      Hom.comp E
        (Hom.comp FragmentContext.closedLeftUnitorInv
          (DayTensor.leftUnitor dayTensorUnit)) :=
      (Hom.comp_assoc _ _ _).symm
    exact h2.trans (h1.trans (Hom.comp_id E))

```

### 5.3.236 Unconditional closed FO ite true Step soundness

**Statement.** Unconditional closed FO ite true Step soundness.

**Proof.** By case analysis on the derivation that  $A$  is a first-order type. For a unit, a bit, a qubit and a tensor product, the claim is checked directly. The key step rewrites with the formula for the denotation of the conditional, the closed bit-literal certificates denote as closed term point, the fact that empty combined split is the Day-unit pairing  $\lambda^{-1} \otimes \lambda^{-1}$  and the definition of the closed term point.

**Lean 4 source** [QLambda/Linear/FragmentDenoteEq.lean](#)

```

theorem FragCert.denote_ite_true_closed {A : Ty}
  (hFO : Ty.FirstOrder A)
  {T E : Term}
  (cT : FragCert.Closed T A) (cE : FragCert.Closed E A) :
  FragCert.denote
    (.ite CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil
      (Ty.SemanticFragment.ofFirstOrder hFO)
      (FragCert.closed_bitLit_cert true) cT cE) =
    FragCert.denote cT := by
  rw [FragCert.denote_ite_eq, FragCert.closed_bitLit_denote_eq,
    FragmentContext.combinedOSplit_nil, FragmentContext.closedPoint,
    routeAFragmentBranching]
  change Hom.comp (iteElimFragment (Ty.SemanticFragment.ofFirstOrder hFO))
    (Hom.comp
      (DayTensor.map
        (Hom.comp (bitLitHom true) FragmentContext.combinedClosedCollapse)
        (additivePair (FragCert.denote cT) (FragCert.denote cE)))
      (DayTensor.map FragmentContext.closedLeftUnitorInv
        FragmentContext.closedLeftUnitorInv)) =
    FragCert.denote cT
  cases hFO with
  | unit =>
    change Hom.comp (iteElimRepresentable 1)
      (Hom.comp
        (DayTensor.map
          (Hom.comp (bitLitHom true) FragmentContext.combinedClosedCollapse)
          (additivePair (FragCert.denote cT) (FragCert.denote cE)))
        (DayTensor.map FragmentContext.closedLeftUnitorInv
          FragmentContext.closedLeftUnitorInv)) =
        FragCert.denote cT
    exact iteElimRepresentable_closed_bitLit_aux 1 true
      (FragCert.denote cT) (FragCert.denote cE)
  | bit =>
    change Hom.comp (iteElimRepresentable 2)
      (Hom.comp
        (DayTensor.map
          (Hom.comp (bitLitHom true) FragmentContext.combinedClosedCollapse)
          (additivePair (FragCert.denote cT) (FragCert.denote cE)))
        (DayTensor.map FragmentContext.closedLeftUnitorInv
          FragmentContext.closedLeftUnitorInv)) =
        FragCert.denote cT
    exact iteElimRepresentable_closed_bitLit_aux 2 true
      (FragCert.denote cT) (FragCert.denote cE)
  | qubit =>
    change Hom.comp (iteElimRepresentable 2)
      (Hom.comp
        (DayTensor.map
          (Hom.comp (bitLitHom true) FragmentContext.combinedClosedCollapse)
          (additivePair (FragCert.denote cT) (FragCert.denote cE)))
        (DayTensor.map FragmentContext.closedLeftUnitorInv
          FragmentContext.closedLeftUnitorInv)) =
        FragCert.denote cT
    exact iteElimRepresentable_closed_bitLit_aux 2 true
      (FragCert.denote cT) (FragCert.denote cE)
  | tensor hA hB =>
    change Hom.comp

```

```

(iteElimRepresentable (Ty.FirstOrder.dimension (.tensor hA hB)))
(Hom.comp
  (DayTensor.map
    (Hom.comp (bitLitHom true) FragmentContext.combinedClosedCollapse)
    (additivePair (FragCert.denote cT) (FragCert.denote cE)))
  (DayTensor.map FragmentContext.closedLeftUnitorInv
    FragmentContext.closedLeftUnitorInv)) =
FragCert.denote cT
exact iteElimRepresentable_closed_bitLit_aux _
true (FragCert.denote cT) (FragCert.denote cE)

```

### 5.3.237 Unconditional closed FO ite false Step soundness

**Statement.** Unconditional closed FO ite false Step soundness.

**Proof.** By case analysis on the derivation that A is a first-order type. For a unit, a bit, a qubit and a tensor product, the claim is checked directly. The key step rewrites with the formula for the denotation of the conditional, the closed bit-literal certificates denote as closed term point, the fact that empty combined split is the Day-unit pairing  $\lambda^{-1} \otimes \lambda^{-1}$  and the definition of the closed term point.

#### Lean 4 source QLambda/Linear/FragmentDenoteEq.lean

```

theorem FragCert.denote_ite_false_closed {A : Ty}
  (hFO : Ty.FirstOrder A)
  {T E : Term}
  (cT : FragCert.Closed T A) (cE : FragCert.Closed E A) :
  FragCert.denote
    (.ite CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil
      (Ty.SemanticFragment.ofFirstOrder hFO)
      (FragCert.closed_bitLit_cert false) cT cE) =
  FragCert.denote cE := by
  rw [FragCert.denote_ite_eq, FragCert.closed_bitLit_denote_eq,
    FragmentContext.combinedOSplit_nil, FragmentContext.closedPoint,
    routeAFragmentBranching]
  change Hom.comp (iteElimFragment (Ty.SemanticFragment.ofFirstOrder hFO))
    (Hom.comp
      (DayTensor.map
        (Hom.comp (bitLitHom false) FragmentContext.combinedClosedCollapse)
        (additivePair (FragCert.denote cT) (FragCert.denote cE)))
      (DayTensor.map FragmentContext.closedLeftUnitorInv
        FragmentContext.closedLeftUnitorInv)) =
  FragCert.denote cE
  cases hFO with
  | unit =>
    change Hom.comp (iteElimRepresentable 1)
      (Hom.comp
        (DayTensor.map
          (Hom.comp (bitLitHom false) FragmentContext.combinedClosedCollapse)
          (additivePair (FragCert.denote cT) (FragCert.denote cE)))
        (DayTensor.map FragmentContext.closedLeftUnitorInv
          FragmentContext.closedLeftUnitorInv)) =
    FragCert.denote cE
    exact iteElimRepresentable_closed_bitLit_aux 1 false
      (FragCert.denote cT) (FragCert.denote cE)
  | bit =>

```

```

change Hom.comp (iteElimRepresentable 2)
  (Hom.comp
    (DayTensor.map
      (Hom.comp (bitLitHom false) FragmentContext.combinedClosedCollapse)
      (additivePair (FragCert.denote cT) (FragCert.denote cE)))
    (DayTensor.map FragmentContext.closedLeftUnitorInv
      FragmentContext.closedLeftUnitorInv)) =
  FragCert.denote cE
exact iteElimRepresentable_closed_bitLit_aux 2 false
  (FragCert.denote cT) (FragCert.denote cE)
| qubit =>
  change Hom.comp (iteElimRepresentable 2)
    (Hom.comp
      (DayTensor.map
        (Hom.comp (bitLitHom false) FragmentContext.combinedClosedCollapse)
        (additivePair (FragCert.denote cT) (FragCert.denote cE)))
      (DayTensor.map FragmentContext.closedLeftUnitorInv
        FragmentContext.closedLeftUnitorInv)) =
      FragCert.denote cE
  exact iteElimRepresentable_closed_bitLit_aux 2 false
    (FragCert.denote cT) (FragCert.denote cE)
| tensor hA hB =>
  change Hom.comp
    (iteElimRepresentable (Ty.FirstOrder.dimension (.tensor hA hB)))
    (Hom.comp
      (DayTensor.map
        (Hom.comp (bitLitHom false) FragmentContext.combinedClosedCollapse)
        (additivePair (FragCert.denote cT) (FragCert.denote cE)))
      (DayTensor.map FragmentContext.closedLeftUnitorInv
        FragmentContext.closedLeftUnitorInv)) =
      FragCert.denote cE
  exact iteElimRepresentable_closed_bitLit_aux _
    false (FragCert.denote cT) (FragCert.denote cE)

```

### 5.3.238 Legacy alias retained for citations that still mention the gap packaging

**Statement.** Legacy alias retained for citations that still mention the gap packaging.

**Proof.** Given the data, the conclusion is produced directly from the conditional elimination representable of the bit literal of true.

#### Lean 4 source `QLambda/Linear/FragmentDenoteEq.lean`

```

theorem FragCert.denote_ite_true_closed_gap (d : Nat) :
  (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil =
    DayTensor.map (DayTensor.leftUnitorInv dayTensorUnit)
      (DayTensor.leftUnitorInv dayTensorUnit)) ->
  forall (T E : Hom dayTensorUnit (representable d)),
    Hom.comp (iteElimRepresentable d)
      (Hom.comp
        (DayTensor.map (bitLitHom true) (additivePair T E))
        (DayTensor.leftUnitorInv dayTensorUnit)) =
    T := fun _ T E =>
iteElimRepresentable_bitLit_true d T E

```

### 5.3.239 Formula for the denotation of the measurement

**Statement.** If every unrestricted variable of  $\Gamma$  has bit type; every cell of the linear context  $\Delta$  is occupied by a fragment type;  $\Delta$  splits into the left part  $\Delta_1$  and the right part  $\Delta_2$ ; and  $A$  lies in the semantic fragment, then the denotation of  $\text{.measure } h\Gamma \ h\Delta \ hs \ hA \ cQ \ cK$  equals an explicit expression in the composition, the measurement elimination, the functorial action and the denotation.

**Proof.** By definition. Unfolding the denotation turns the left-hand side, the denotation of  $\text{.measure } h\Gamma \ h\Delta \ hs \ hA \ cQ \ cK$ , into the right-hand side, an explicit expression in the composition, the measurement elimination, the functorial action and the denotation; the two sides are the same term.

#### Lean 4 source `QLambda/Linear/FragmentDenoteEq.lean`

```
theorem FragCert.denote_measure_eq {Gamma Delta Delta_1 Delta_2 A Q K}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hA : Ty.SemanticFragment A)
  (cQ : FragCert Gamma Delta_1 Q .qubit)
  (cK : FragCert Gamma Delta_2 K (.arrow .unres .bit (.arrow .lin .qubit A))) :
  FragCert.denote (.measure hGamma hDelta hs hA cQ cK) =
    Hom.comp (FragCert.measureElim _)
      (Hom.comp
        (DayTensor.map (FragCert.denote cQ) (FragCert.denote cK))
        (FragmentContext.combinedOSplit hGamma hs)) :=
  rfl
```

### 5.3.240 Formula for the denotation of the unrestricted variable

**Statement.** If every unrestricted variable of  $\Gamma$  has bit type; every cell of the linear context  $\Delta$  is occupied by a fragment type; position  $n$  of  $\Gamma$  holds  $A$ ; and  $\text{Ty.Duplicable } A$ , then the denotation of  $\text{.varU } h\Gamma \ hL \ h1 \ hD \ h\Delta \ hA$  equals the combined context lookup unrestricted of  $h\Gamma, h1, h\Delta$ .

**Proof.** By definition. Unfolding the denotation turns the left-hand side, the denotation of  $\text{.varU } h\Gamma \ hL \ h1 \ hD \ h\Delta \ hA$ , into the right-hand side, the combined context lookup unrestricted of  $h\Gamma, h1, h\Delta$ ; the two sides are the same term.

#### Lean 4 source `QLambda/Linear/FragmentDenoteEq.lean`

```
theorem FragCert.denote_varU_eq {Gamma Delta n A}
  (hGamma : CtxUAllBit Gamma) (hL : CtxLAllSomeFragment Delta)
  (h1 : Lookup Gamma n A) (hD : Ty.Duplicable A) (hDelta : AllNone Delta)
  (hA : Ty.SemanticFragment A) :
  FragCert.denote (.varU hGamma hL h1 hD hDelta hA) =
    FragmentContext.combinedLookupUnrestricted hGamma h1 hDelta :=
  rfl
```

### 5.3.241 Formula for the denotation of the linear variable

**Statement.** If every unrestricted variable of  $\Gamma$  has bit type; every cell of the linear context  $\Delta$  is occupied by a fragment type; position  $n$  of  $\Delta$  holds some  $A$ ; and  $\Delta$  is occupied exactly at position  $n$ , then the denotation of  $\text{.varL } h\Gamma \ hL \ h1 \ ho \ hA$  equals the combined context lookup linear of  $h\Gamma, h1, ho$ .

**Proof.** By definition. Unfolding the denotation turns the left-hand side, the denotation of  $\text{.varL } h\Gamma \text{ hL h1 ho hA}$ , into the right-hand side, the combined context lookup linear of  $h\Gamma, h1, ho$ ; the two sides are the same term.

#### Lean 4 source `QLambda/Linear/FragmentDenoteEq.lean`

```
theorem FragCert.denote_varL_eq {Gamma Delta n A}
  (hGamma : CtxUAllBit Gamma) (hL : CtxLAllSomeFragment Delta)
  (h1 : Lookup Delta n (some A)) (ho : OnlySomeAt Delta n)
  (hA : Ty.SemanticFragment A) :
  FragCert.denote (.varL hGamma hL h1 ho hA) =
    FragmentContext.combinedLookupLinear hGamma h1 ho :=
  rfl
```

### 5.3.242 Formula for the denotation of the linear lambda abstraction

**Statement.** If every unrestricted variable of  $\Gamma$  has bit type; every cell of the linear context  $\Delta$  is occupied by a fragment type;  $A$  is admissible; and  $A$  is a first-order type, then the denotation of  $\text{.lamL } h\Gamma \text{ hL hAd hFO hB c}$  equals the abstract linear of  $hFO$  and the denotation of  $c$ .

**Proof.** By definition. Unfolding the denotation turns the left-hand side, the denotation of  $\text{.lamL } h\Gamma \text{ hL hAd hFO hB c}$ , into the right-hand side, the abstract linear of  $hFO$  and the denotation of  $c$ ; the two sides are the same term.

#### Lean 4 source `QLambda/Linear/FragmentDenoteEq.lean`

```
theorem FragCert.denote_lamL_eq {Gamma Delta A B M}
  (hGamma : CtxUAllBit Gamma) (hL : CtxLAllSomeFragment Delta)
  (hAd : Ty.Admissible A) (hFO : Ty.FirstOrder A)
  (hB : Ty.SemanticFragment B) (c : FragCert Gamma (some A :: Delta) M B) :
  FragCert.denote (.lamL hGamma hL hAd hFO hB c) =
    FragmentContext.abstractLinear hFO (FragCert.denote c) :=
  rfl
```

### 5.3.243 Formula for the denotation of the unrestricted lambda abstraction

**Statement.** If every unrestricted variable of  $\Gamma$  has bit type; every cell of the linear context  $\Delta$  is occupied by a fragment type;  $\text{.bit}$  is admissible; and  $\text{Ty.Duplicable .bit}$ , then the denotation of  $\text{.lamU } h\Gamma \text{ hL hAd hDup hDelta hArr c}$  equals the abstract unrestricted of the denotation of  $c$ .

**Proof.** By definition. Unfolding the denotation turns the left-hand side, the denotation of  $\text{.lamU } h\Gamma \text{ hL hAd hDup hDelta hArr c}$ , into the right-hand side, the abstract unrestricted of the denotation of  $c$ ; the two sides are the same term.

#### Lean 4 source `QLambda/Linear/FragmentDenoteEq.lean`

```
theorem FragCert.denote_lamU_eq {Gamma Delta B M}
  (hGamma : CtxUAllBit Gamma) (hL : CtxLAllSomeFragment Delta)
  (hAd : Ty.Admissible .bit) (hDup : Ty.Duplicable .bit)
  (hDelta : AllNone Delta) (hArr : Ty.SemanticFragment (.arrow .unres .bit B))
  (c : FragCert (.bit :: Gamma) Delta M B) :
  FragCert.denote (.lamU hGamma hL hAd hDup hDelta hArr c) =
    FragmentContext.abstractUnrestricted (FragCert.denote c) :=
```

rfl

### 5.3.244 Formula for the denotation of the linear application

**Statement.** If every unrestricted variable of  $\Gamma$  has bit type; every cell of the linear context  $\Delta$  is occupied by a fragment type;  $\Delta$  splits into the left part  $\Delta_1$  and the right part  $\Delta_2$ ; and  $A$  is a first-order type, then the denotation of  $\text{.appL } h\Gamma \ h\Delta \ hs \ hFO \ hB \ cF \ cX$  equals an explicit expression in the composition, the evaluation fragment first order, the  $hFO$  and the functorial action.

**Proof.** By definition. Unfolding the denotation turns the left-hand side, the denotation of  $\text{.appL } h\Gamma \ h\Delta \ hs \ hFO \ hB \ cF \ cX$ , into the right-hand side, an explicit expression in the composition, the evaluation fragment first order, the  $hFO$  and the functorial action; the two sides are the same term.

#### Lean 4 source `QLambda/Linear/FragmentDenoteEq.lean`

```
theorem FragCert.denote_appL_eq {Gamma Delta Delta_1 Delta_2 A B F X}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hFO : Ty.FirstOrder A)
  (hB : Ty.SemanticFragment B)
  (cF : FragCert Gamma Delta_1 F (.arrow .lin A B)) (cX : FragCert Gamma Delta_2 X A)
  :
  FragCert.denote (.appL hGamma hDelta hs hFO hB cF cX) =
    Hom.comp (FragmentContext.evalFragmentFirstOrder hFO _)
      (Hom.comp
        (DayTensor.map (FragCert.denote cF) (FragCert.denote cX))
        (FragmentContext.combinedOSplit hGamma hs)) :=
  rfl
```

### 5.3.245 Formula for the denotation of the unrestricted application

**Statement.** If every unrestricted variable of  $\Gamma$  has bit type; every cell of the linear context  $\Delta$  is occupied by a fragment type;  $\Delta$  splits into the left part  $\Delta_F$  and the right part  $\Delta_X$ ; and  $\Delta_X$  is an empty usage mask, then the denotation of  $\text{.appU } h\Gamma \ h\Delta \ hs \ hN \ hB \ cF \ cX$  equals an explicit expression in the composition, the evaluation unrestricted bit, the functorial action and the denotation.

**Proof.** By definition. Unfolding the denotation turns the left-hand side, the denotation of  $\text{.appU } h\Gamma \ h\Delta \ hs \ hN \ hB \ cF \ cX$ , into the right-hand side, an explicit expression in the composition, the evaluation unrestricted bit, the functorial action and the denotation; the two sides are the same term.

#### Lean 4 source `QLambda/Linear/FragmentDenoteEq.lean`

```
theorem FragCert.denote_appU_eq {Gamma Delta Delta_F Delta_X B F X}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_F Delta_X) (hN : AllNone Delta_X) (hB : Ty.SemanticFragment B)
  (cF : FragCert Gamma Delta_F F (.arrow .unres .bit B))
  (cX : FragCert Gamma Delta_X X .bit) :
  FragCert.denote (.appU hGamma hDelta hs hN hB cF cX) =
    Hom.comp (FragmentContext.evalUnrestrictedBit _)
      (Hom.comp
        (DayTensor.map (FragCert.denote cF) (FragCert.denote cX))
        (FragmentContext.combinedOSplit hGamma hs)) :=
  rfl
```

### 5.3.246 Formula for the denotation of a pair

**Statement.** If every unrestricted variable of  $\Gamma$  has bit type; every cell of the linear context  $\Delta$  is occupied by a fragment type;  $\Delta$  splits into the left part  $\Delta_1$  and the right part  $\Delta_2$ ; and  $A$  is a first-order type, then the denotation of  $\text{.pair } h\Gamma \ h\Delta \ hs \ hA \ hB \ cM \ cN$  equals an explicit expression in the composition, the tensor product introduction, the functorial action and the denotation.

**Proof.** By definition. Unfolding the denotation turns the left-hand side, the denotation of  $\text{.pair } h\Gamma \ h\Delta \ hs \ hA \ hB \ cM \ cN$ , into the right-hand side, an explicit expression in the composition, the tensor product introduction, the functorial action and the denotation; the two sides are the same term.

#### Lean 4 source `QLambda/Linear/FragmentDenoteEq.lean`

```
theorem FragCert.denote_pair_eq {Gamma Delta Delta_1 Delta_2 A B M N}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hA : Ty.FirstOrder A) (hB : Ty.FirstOrder B)
  (cM : FragCert Gamma Delta_1 M A) (cN : FragCert Gamma Delta_2 N B) :
  FragCert.denote (.pair hGamma hDelta hs hA hB cM cN) =
    Hom.comp (FragmentContext.tensorIntro hA hB)
      (Hom.comp
        (DayTensor.map (FragCert.denote cM) (FragCert.denote cN))
        (FragmentContext.combinedOSplit hGamma hs)) :=
  rfl
```

### 5.3.247 Formula for the denotation of the pair elimination

**Statement.** If every unrestricted variable of  $\Gamma$  has bit type; every cell of the linear context  $\Delta$  is occupied by a fragment type;  $\Delta$  splits into the left part  $\Delta_1$  and the right part  $\Delta_2$ ; and  $A$  is a first-order type, then the denotation of  $\text{.unpair } h\Gamma \ h\Delta \ hs \ hA \ hB \ hC \ cM \ cK$  equals an explicit expression in the composition, the pair elimination application, the functorial action and the denotation.

**Proof.** By definition. Unfolding the denotation turns the left-hand side, the denotation of  $\text{.unpair } h\Gamma \ h\Delta \ hs \ hA \ hB \ hC \ cM \ cK$ , into the right-hand side, an explicit expression in the composition, the pair elimination application, the functorial action and the denotation; the two sides are the same term.

#### Lean 4 source `QLambda/Linear/FragmentDenoteEq.lean`

```
theorem FragCert.denote_unpair_eq {Gamma Delta Delta_1 Delta_2 A B C M K}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hA : Ty.FirstOrder A) (hB : Ty.FirstOrder B)
  (hC : Ty.SemanticFragment C)
  (cM : FragCert Gamma Delta_1 M (.tensor A B))
  (cK : FragCert Gamma Delta_2 K (.arrow .lin A (.arrow .lin B C))) :
  FragCert.denote (.unpair hGamma hDelta hs hA hB hC cM cK) =
    Hom.comp (FragmentContext.unpairApply hA hB _)
      (Hom.comp
        (DayTensor.map (FragCert.denote cM) (FragCert.denote cK))
        (FragmentContext.combinedOSplit hGamma hs)) :=
  rfl

/-- ## Proof-witness independence -/
```



### 5.3.248 Proof-witness independence

**Statement.** ## Proof-witness independence. Formally:  $\text{FragCert.denote } (.unit \ h\Gamma \ hL \ h\Delta) = \text{FragCert.denote } (.unit \ h\Gamma' \ hL' \ h\Delta')$ .

**Proof.** Both sides apply the same construction to arguments that can differ only in proofs of the same proposition; since any two such proofs are equal, the two sides coincide by congruence.

**Lean 4 source** [QLambda/Linear/FragmentDenoteEq.lean](#)

```
theorem FragCert.denote_unit_proof_independent {Gamma Delta}
  (hGamma hGamma' : CtxUAllBit Gamma) (hL hL' : CtxLAllSomeFragment Delta)
  (hDelta hDelta' : AllNone Delta) :
  FragCert.denote (.unit hGamma hL hDelta) =
    FragCert.denote (.unit hGamma' hL' hDelta') := by
  congr
```

### 5.3.249 The denotation of the bit literal does not depend on the choice of proof

**Statement.** If every unrestricted variable of  $\Gamma$  has bit type; every cell of the linear context  $\Delta$  is occupied by a fragment type; and  $\Delta$  is an empty usage mask, then the denotation of  $.bitLit \ h\Gamma \ hL \ b \ h\Delta$  equals the denotation of  $.bitLit \ h\Gamma' \ hL' \ b \ h\Delta'$ .

**Proof.** Both sides apply the same construction to arguments that can differ only in proofs of the same proposition; since any two such proofs are equal, the two sides coincide by congruence.

**Lean 4 source** [QLambda/Linear/FragmentDenoteEq.lean](#)

```
theorem FragCert.denote_bitLit_proof_independent {Gamma Delta b}
  (hGamma hGamma' : CtxUAllBit Gamma) (hL hL' : CtxLAllSomeFragment Delta)
  (hDelta hDelta' : AllNone Delta) :
  FragCert.denote (.bitLit hGamma hL b hDelta) =
    FragCert.denote (.bitLit hGamma' hL' b hDelta') := by
  congr
```

### 5.3.250 The denotation primitive proof independent

**Statement.** If every unrestricted variable of  $\Gamma$  has bit type; every cell of the linear context  $\Delta$  is occupied by a fragment type; and  $\Delta$  is an empty usage mask, then the denotation of  $.prim \ h\Gamma \ hL \ p \ h\Delta$  equals the denotation of  $.prim \ h\Gamma' \ hL' \ p \ h\Delta'$ .

**Proof.** Both sides apply the same construction to arguments that can differ only in proofs of the same proposition; since any two such proofs are equal, the two sides coincide by congruence.

**Lean 4 source** [QLambda/Linear/FragmentDenoteEq.lean](#)

```
theorem FragCert.denote_prim_proof_independent {Gamma Delta p}
  (hGamma hGamma' : CtxUAllBit Gamma) (hL hL' : CtxLAllSomeFragment Delta)
  (hDelta hDelta' : AllNone Delta) :
  FragCert.denote (.prim hGamma hL p hDelta) =
    FragCert.denote (.prim hGamma' hL' p hDelta') := by
  congr
```

### 5.3.251 The denotation of the unrestricted variable does not depend on the choice of proof

**Statement.** If every unrestricted variable of  $\Gamma$  has bit type; every cell of the linear context  $\Delta$  is occupied by a fragment type; position  $n$  of  $\Gamma$  holds  $A$ ; and  $\text{Ty.Duplicable } A$ , then the denotation of  $\text{.varU } h\Gamma \text{ hL } h\Delta \text{ hA}$  equals the denotation of  $\text{.varU } h\Gamma' \text{ hL}' \text{ h}\Delta' \text{ hA}'$ .

**Proof.** Both sides apply the same construction to arguments that can differ only in proofs of the same proposition; since any two such proofs are equal, the two sides coincide by congruence.

#### Lean 4 source `QLambda/Linear/FragmentDenoteEq.lean`

```
theorem FragCert.denote_varU_proof_independent {Gamma Delta n A}
  (hGamma hGamma' : CtxUAllBit Gamma) (hL hL' : CtxLAllSomeFragment Delta)
  (hl hl' : Lookup Gamma n A) (hD hD' : Ty.Duplicable A)
  (hDelta hDelta' : AllNone Delta) (hA hA' : Ty.SemanticFragment A) :
  FragCert.denote (.varU hGamma hL hl hD hDelta hA) =
    FragCert.denote (.varU hGamma' hL' hl' hD' hDelta' hA') := by
  congr
```

### 5.3.252 The denotation of the linear variable does not depend on the choice of proof

**Statement.** If every unrestricted variable of  $\Gamma$  has bit type; every cell of the linear context  $\Delta$  is occupied by a fragment type; position  $n$  of  $\Delta$  holds some  $A$ ; and  $\Delta$  is occupied exactly at position  $n$ , then the denotation of  $\text{.varL } h\Gamma \text{ hL } hl \text{ ho } hA$  equals the denotation of  $\text{.varL } h\Gamma' \text{ hL}' \text{ hl}' \text{ ho}' \text{ hA}'$ .

**Proof.** Both sides apply the same construction to arguments that can differ only in proofs of the same proposition; since any two such proofs are equal, the two sides coincide by congruence.

#### Lean 4 source `QLambda/Linear/FragmentDenoteEq.lean`

```
theorem FragCert.denote_varL_proof_independent {Gamma Delta n A}
  (hGamma hGamma' : CtxUAllBit Gamma) (hL hL' : CtxLAllSomeFragment Delta)
  (hl hl' : Lookup Delta n (some A)) (ho ho' : OnlySomeAt Delta n)
  (hA hA' : Ty.SemanticFragment A) :
  FragCert.denote (.varL hGamma hL hl ho hA) =
    FragCert.denote (.varL hGamma' hL' hl' ho' hA') := by
  congr
```

### 5.3.253 The denotation of the linear lambda abstraction does not depend on the choice of proof

**Statement.** If every unrestricted variable of  $\Gamma$  has bit type; every cell of the linear context  $\Delta$  is occupied by a fragment type;  $A$  is admissible; and  $A$  is a first-order type, then the denotation of  $\text{.lamL } h\Gamma \text{ hL } hAd \text{ hFO } hB \text{ c}$  equals the denotation of  $\text{.lamL } h\Gamma' \text{ hL}' \text{ hAd}' \text{ hFO}' \text{ hB}' \text{ c}$ .

**Proof.** Both sides apply the same construction to arguments that can differ only in proofs of the same proposition; since any two such proofs are equal, the two sides coincide by congruence.

#### Lean 4 source `QLambda/Linear/FragmentDenoteEq.lean`

```
theorem FragCert.denote_lamL_proof_independent {Gamma Delta A B M}
  (hGamma hGamma' : CtxUAllBit Gamma) (hL hL' : CtxLAllSomeFragment Delta)
  (hAd hAd' : Ty.Admissible A) (hFO hFO' : Ty.FirstOrder A)
  (hB hB' : Ty.SemanticFragment B)
  (c : FragCert Gamma (some A :: Delta) M B) :
```

```

FragCert.denote (.lamL hGamma hL hAd hFO hB c) =
  FragCert.denote (.lamL hGamma' hL' hAd' hFO' hB' c) := by
congr

```

### 5.3.254 The denotation of the unrestricted lambda abstraction does not depend on the choice of proof

**Statement.** If every unrestricted variable of  $\Gamma$  has bit type; every cell of the linear context  $\Delta$  is occupied by a fragment type; `.bit` is admissible; and `Ty.Duplicable .bit`, then the denotation of `.lamU h $\Gamma$  hL hAd hDup h $\Delta$  hArr c` equals the denotation of `.lamU h $\Gamma$ ' hL' hAd' hDup' h $\Delta$ ' hArr' c`.

**Proof.** Both sides apply the same construction to arguments that can differ only in proofs of the same proposition; since any two such proofs are equal, the two sides coincide by congruence.

#### Lean 4 source `QLambda/Linear/FragmentDenoteEq.lean`

```

theorem FragCert.denote_lamU_proof_independent {Gamma Delta B M}
  (hGamma hGamma' : CtxUAllBit Gamma) (hL hL' : CtxLAllSomeFragment Delta)
  (hAd hAd' : Ty.Admissible .bit) (hDup hDup' : Ty.Duplicable .bit)
  (hDelta hDelta' : AllNone Delta)
  (hArr hArr' : Ty.SemanticFragment (.arrow .unres .bit B))
  (c : FragCert (.bit :: Gamma) Delta M B) :
  FragCert.denote (.lamU hGamma hL hAd hDup hDelta hArr c) =
    FragCert.denote (.lamU hGamma' hL' hAd' hDup' hDelta' hArr' c) := by
congr

```

### 5.3.255 The denotation of the linear application does not depend on the choice of proof

**Statement.** If every unrestricted variable of  $\Gamma$  has bit type; every cell of the linear context  $\Delta$  is occupied by a fragment type;  $\Delta$  splits into the left part  $\Delta_1$  and the right part  $\Delta_2$ ; and  $A$  is a first-order type, then the denotation of `.appL h $\Gamma$  h $\Delta$  hs hFO hB cF cX` equals the denotation of `.appL h $\Gamma$ ' h $\Delta$ ' hs' hFO' hB' cF cX`.

**Proof.** Both sides apply the same construction to arguments that can differ only in proofs of the same proposition; since any two such proofs are equal, the two sides coincide by congruence.

#### Lean 4 source `QLambda/Linear/FragmentDenoteEq.lean`

```

theorem FragCert.denote_appL_proof_independent {Gamma Delta Delta_1 Delta_2 A B F X}
  (hGamma hGamma' : CtxUAllBit Gamma) (hDelta hDelta' : CtxLAllSomeFragment Delta)
  (hs hs' : OSplit Delta Delta_1 Delta_2) (hFO hFO' : Ty.FirstOrder A)
  (hB hB' : Ty.SemanticFragment B)
  (cF : FragCert Gamma Delta_1 F (.arrow .lin A B)) (cX : FragCert Gamma Delta_2 X A) :
  FragCert.denote (.appL hGamma hDelta hs hFO hB cF cX) =
    FragCert.denote (.appL hGamma' hDelta' hs' hFO' hB' cF cX) := by
congr

```

### 5.3.256 The denotation of the unrestricted application does not depend on the choice of proof

**Statement.** If every unrestricted variable of  $\Gamma$  has bit type; every cell of the linear context  $\Delta$  is occupied by a fragment type;  $\Delta$  splits into the left part  $\Delta_F$  and the right part  $\Delta_X$ ; and  $\Delta_X$  is an empty usage mask, then the denotation of  $\text{.appU } h\Gamma \ h\Delta \ hs \ hN \ hB \ cF \ cX$  equals the denotation of  $\text{.appU } h\Gamma' \ h\Delta' \ hs' \ hN' \ hB' \ cF \ cX$ .

**Proof.** Both sides apply the same construction to arguments that can differ only in proofs of the same proposition; since any two such proofs are equal, the two sides coincide by congruence.

#### Lean 4 source `QLambda/Linear/FragmentDenoteEq.lean`

```
theorem FragCert.denote_appU_proof_independent {Gamma Delta DeltaF DeltaX B F X}
  (hGamma hGamma' : CtxUAllBit Gamma) (hDelta hDelta' : CtxLAllSomeFragment Delta)
  (hs hs' : OSplit Delta DeltaF DeltaX) (hN hN' : AllNone DeltaX)
  (hB hB' : Ty.SemanticFragment B)
  (cF : FragCert Gamma DeltaF F (.arrow .unres .bit B))
  (cX : FragCert Gamma DeltaX X .bit) :
  FragCert.denote (.appU hGamma hDelta hs hN hB cF cX) =
    FragCert.denote (.appU hGamma' hDelta' hs' hN' hB' cF cX) := by
  congr
```

### 5.3.257 The denotation pair proof independent

**Statement.** If every unrestricted variable of  $\Gamma$  has bit type; every cell of the linear context  $\Delta$  is occupied by a fragment type;  $\Delta$  splits into the left part  $\Delta_1$  and the right part  $\Delta_2$ ; and  $A$  is a first-order type, then the denotation of  $\text{.pair } h\Gamma \ h\Delta \ hs \ hA \ hB \ cM \ cN$  equals the denotation of  $\text{.pair } h\Gamma' \ h\Delta' \ hs' \ hA' \ hB' \ cM \ cN$ .

**Proof.** Both sides apply the same construction to arguments that can differ only in proofs of the same proposition; since any two such proofs are equal, the two sides coincide by congruence.

#### Lean 4 source `QLambda/Linear/FragmentDenoteEq.lean`

```
theorem FragCert.denote_pair_proof_independent {Gamma Delta Delta_1 Delta_2 A B M N}
  (hGamma hGamma' : CtxUAllBit Gamma) (hDelta hDelta' : CtxLAllSomeFragment Delta)
  (hs hs' : OSplit Delta Delta_1 Delta_2) (hA hA' : Ty.FirstOrder A)
  (hB hB' : Ty.FirstOrder B)
  (cM : FragCert Gamma Delta_1 M A) (cN : FragCert Gamma Delta_2 N B) :
  FragCert.denote (.pair hGamma hDelta hs hA hB cM cN) =
    FragCert.denote (.pair hGamma' hDelta' hs' hA' hB' cM cN) := by
  congr
```

### 5.3.258 The denotation pair elimination proof independent

**Statement.** If every unrestricted variable of  $\Gamma$  has bit type; every cell of the linear context  $\Delta$  is occupied by a fragment type;  $\Delta$  splits into the left part  $\Delta_1$  and the right part  $\Delta_2$ ; and  $A$  is a first-order type, then the denotation of  $\text{.unpair } h\Gamma \ h\Delta \ hs \ hA \ hB \ hC \ cM \ cK$  equals the denotation of  $\text{.unpair } h\Gamma' \ h\Delta' \ hs' \ hA' \ hB' \ hC' \ cM \ cK$ .

**Proof.** Both sides apply the same construction to arguments that can differ only in proofs of the same proposition; since any two such proofs are equal, the two sides coincide by congruence.

### Lean 4 source `QLambda/Linear/FragmentDenoteEq.lean`

```
theorem FragCert.denote_unpair_proof_independent {Gamma Delta Delta_1 Delta_2 A B C M
  K}
  (hGamma hGamma' : CtxUAllBit Gamma) (hDelta hDelta' : CtxLAllSomeFragment Delta)
  (hs hs' : OSplit Delta Delta_1 Delta_2) (hA hA' : Ty.FirstOrder A)
  (hB hB' : Ty.FirstOrder B) (hC hC' : Ty.SemanticFragment C)
  (cM : FragCert Gamma Delta_1 M (.tensor A B))
  (cK : FragCert Gamma Delta_2 K (.arrow .lin A (.arrow .lin B C))) :
  FragCert.denote (.unpair hGamma hDelta hs hA hB hC cM cK) =
    FragCert.denote (.unpair hGamma' hDelta' hs' hA' hB' hC' cM cK) := by
  congr
```

#### 5.3.259 The denotation conditional proof independent

**Statement.** If every unrestricted variable of  $\Gamma$  has bit type; every cell of the linear context  $\Delta$  is occupied by a fragment type;  $\Delta$  splits into the left part  $\Delta_1$  and the right part  $\Delta_2$ ; and  $A$  lies in the semantic fragment, then the denotation of `.ite`  $h\Gamma$   $h\Delta$   $hs$   $hA$   $cB$   $cT$   $cE$  equals the denotation of `.ite`  $h\Gamma'$   $h\Delta'$   $hs'$   $hA'$   $cB$   $cT$   $cE$ .

**Proof.** Both sides apply the same construction to arguments that can differ only in proofs of the same proposition; since any two such proofs are equal, the two sides coincide by congruence.

### Lean 4 source `QLambda/Linear/FragmentDenoteEq.lean`

```
theorem FragCert.denote_ite_proof_independent {Gamma Delta Delta_1 Delta_2 A B T E}
  (hGamma hGamma' : CtxUAllBit Gamma) (hDelta hDelta' : CtxLAllSomeFragment Delta)
  (hs hs' : OSplit Delta Delta_1 Delta_2) (hA hA' : Ty.SemanticFragment A)
  (cB : FragCert Gamma Delta_1 B .bit) (cT : FragCert Gamma Delta_2 T A)
  (cE : FragCert Gamma Delta_2 E A) :
  FragCert.denote (.ite hGamma hDelta hs hA cB cT cE) =
    FragCert.denote (.ite hGamma' hDelta' hs' hA' cB cT cE) := by
  congr
```

#### 5.3.260 The denotation measurement proof independent

**Statement.** If every unrestricted variable of  $\Gamma$  has bit type; every cell of the linear context  $\Delta$  is occupied by a fragment type;  $\Delta$  splits into the left part  $\Delta_1$  and the right part  $\Delta_2$ ; and  $A$  lies in the semantic fragment, then the denotation of `.measure`  $h\Gamma$   $h\Delta$   $hs$   $hA$   $cQ$   $cK$  equals the denotation of `.measure`  $h\Gamma'$   $h\Delta'$   $hs'$   $hA'$   $cQ$   $cK$ .

**Proof.** Both sides apply the same construction to arguments that can differ only in proofs of the same proposition; since any two such proofs are equal, the two sides coincide by congruence.

### Lean 4 source `QLambda/Linear/FragmentDenoteEq.lean`

```
theorem FragCert.denote_measure_proof_independent {Gamma Delta Delta_1 Delta_2 A Q K}
  (hGamma hGamma' : CtxUAllBit Gamma) (hDelta hDelta' : CtxLAllSomeFragment Delta)
  (hs hs' : OSplit Delta Delta_1 Delta_2) (hA hA' : Ty.SemanticFragment A)
  (cQ : FragCert Gamma Delta_1 Q .qubit)
  (cK : FragCert Gamma Delta_2 K (.arrow .unres .bit (.arrow .lin .qubit A))) :
  FragCert.denote (.measure hGamma hDelta hs hA cQ cK) =
    FragCert.denote (.measure hGamma' hDelta' hs' hA' cQ cK) := by
  congr
```

### 5.3.261 Full Route-A denotation model

**Definition.** Full Route-A denotation model.

**Construction.** Constructed by supplying each component: denotation, denotation unit and denotation bit lit. The accompanying laws are verified from the definitions.

#### Lean 4 source `QLambda/Linear/FragmentDenoteEq.lean`

```
noncomputable def routeAFragmentDenotationModel : FragmentDenotationModel where
  denote := FragCert.denote
  denote_unit := by
    intro c
    cases c with
    | unit hGamma _ hDelta =>
      change FragmentContext.combinedPoint hGamma hDelta
      routeAFragmentModel.unitIntro =
      FragmentContext.closedPoint routeAFragmentModel.unitIntro
      simp only [FragmentContext.combinedPoint, FragmentContext.closedPoint,
        combinedAllDiscard_nil]
  denote_bitLit := by
    intro b c
    cases c with
    | bitLit hGamma _ _ hDelta =>
      change FragmentContext.combinedPoint hGamma hDelta
      (routeAFragmentModel.bitLit b) =
      FragmentContext.closedPoint (routeAFragmentModel.bitLit b)
      simp only [FragmentContext.combinedPoint, FragmentContext.closedPoint,
        combinedAllDiscard_nil]
```

### 5.3.262 Route A supplies compositional open-term denotation for every fragment certificate

**Statement.** Route A supplies compositional open-term denotation for every `FragCert`. Formally: `Nonempty FragmentDenotationModel`.

**Proof.** The witness is assembled directly from its components, using the definition of the route a fragment denotation matrix model.

#### Lean 4 source `QLambda/Linear/FragmentDenoteEq.lean`

```
theorem routeA_fragment_denotation_exists :
  Nonempty FragmentDenotationModel :=
  <routeAFragmentDenotationModel>
```

### 5.3.263 Closed identity $\beta$ certificate constructors

**Statement.** `##` Closed identity  $\beta$  certificate constructors Closed linear identity  $\beta$  (`fragment_betaL_id_unit / fragment_betaL_id_bit`) and unrestricted identity  $\beta$  (`fragment_betaU_id_bit`) are proved via Day  $\beta$  plus Day unitor/braiding cancellation against `combinedOSplit_nil / closedPoint` (with `classicalize` for the unrestricted case). Formally: `Ty.Admissible .unit`.

**Proof.** The claim is a finite computation and is checked by evaluating it.

#### Lean 4 source `QLambda/Linear/FragmentIdentityBeta.lean`

```
theorem fragment_unit_admissible : Ty.Admissible .unit := by
  decide
```

### 5.3.264 Admissibility of the fragment of the bit

**Statement.** `.bit` is admissible. Formally: `Ty.Admissible .bit`.

**Proof.** The claim is a finite computation and is checked by evaluating it.

**Lean 4 source** [QLambda/Linear/FragmentIdentityBeta.lean](#)

```
theorem fragment_bit_admissible : Ty.Admissible .bit := by
  decide
```

### 5.3.265 Duplicability of the fragment of the bit

**Statement.** `Ty.Duplicable .bit`. Formally: `Ty.Duplicable .bit`.

**Proof.** The claim is a finite computation and is checked by evaluating it.

**Lean 4 source** [QLambda/Linear/FragmentIdentityBeta.lean](#)

```
theorem fragment_bit_duplicable : Ty.Duplicable .bit := by
  decide
```

### 5.3.266 Fragment of the unrestricted context of the bit of the empty list

**Statement.** Every unrestricted variable of `[.bit]` has bit type. Formally: `CtxUAllBit [.bit]`.

**Proof.** By case analysis on `hm`. The goal is simplified using standard identities for lists.

**Lean 4 source** [QLambda/Linear/FragmentIdentityBeta.lean](#)

```
theorem fragment_ctxU_bit_nil : CtxUAllBit [.bit] := by
  intro A hm
  simp only [List.mem_cons] at hm
  rcases hm with rfl | hm
  * rfl
  * cases hm
```

### 5.3.267 Linear identity body linear variable of 0 in a singleton unit context

**Definition.** Linear identity body `varL 0` in a singleton unit context.

**Construction.** Defined by an explicit formula built from the empty list, the extended list `some`, the unit and the zero.

**Lean 4 source** [QLambda/Linear/FragmentIdentityBeta.lean](#)

```
noncomputable def fragCert_varL0_unit :
  FragCert [] [some .unit] (.var .lin 0) .unit :=
  .varL CtxUAllBit.nil
  (CtxLAllSomeFragment.cons_some Ty.SemanticFragment.unit
```

```

    CtxLAllSomeFragment.nil)
Lookup.zero trivial Ty.SemanticFragment.unit

```

### 5.3.268 Definition of the fragment certificate of the linear lambda abstraction of the identity of the unit

**Definition.** Closed linear identity combinator  $\lambda x. x$  at unit.

**Construction.** Defined by an explicit formula built from the empty list, the fragment unit admissibility, the unit and the fragment certificate variable linear 0 unit.

**Lean 4 source** [QLambda/Linear/FragmentIdentityBeta.lean](#)

```

noncomputable def fragCert_lamL_id_unit :
  FragCert [] [] (.lam .lin .unit (.var .lin 0))
    (.arrow .lin .unit .unit) :=
.lamL CtxUAllBit.nil CtxLAllSomeFragment.nil fragment_unit_admissible
  Ty.FirstOrder.unit Ty.SemanticFragment.unit fragCert_varL0_unit

```

### 5.3.269 Definition of the fragment certificate of the linear application of the identity of the unit

**Definition.** Closed  $\beta$ -redex app  $(\lambda x. x)$  unit.

**Construction.** Defined by an explicit formula built from the empty list, the unit, the fragment certificate lambda linear identity unit and the closed term unit certificate.

**Lean 4 source** [QLambda/Linear/FragmentIdentityBeta.lean](#)

```

noncomputable def fragCert_appL_id_unit :
  FragCert [] []
    (.app (.lam .lin .unit (.var .lin 0)) .unit) .unit :=
.appL CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil
  Ty.FirstOrder.unit Ty.SemanticFragment.unit
  fragCert_lamL_id_unit FragCert.closed_unit_cert

```

### 5.3.270 Linear identity body linear variable of 0 in a singleton bit context

**Definition.** Linear identity body  $\text{varL } 0$  in a singleton bit context.

**Construction.** Defined by an explicit formula built from the empty list, the extended list some, the bit and the zero.

**Lean 4 source** [QLambda/Linear/FragmentIdentityBeta.lean](#)

```

noncomputable def fragCert_varL0_bit :
  FragCert [] [some .bit] (.var .lin 0) .bit :=
.varL CtxUAllBit.nil
  (CtxLAllSomeFragment.cons_some Ty.SemanticFragment.bit
    CtxLAllSomeFragment.nil)
  Lookup.zero trivial Ty.SemanticFragment.bit

```



### 5.3.271 Definition of the fragment certificate of the linear lambda abstraction of the identity of the bit

**Definition.** Closed linear identity combinator  $\lambda x. x$  at bit.

**Construction.** Defined by an explicit formula built from the empty list, the fragment bit admissibility, the bit and the fragment certificate variable linear 0 bit.

**Lean 4 source** `QLambda/Linear/FragmentIdentityBeta.lean`

```
noncomputable def fragCert_lamL_id_bit :  
  FragCert [] [] (.lam .lin .bit (.var .lin 0))  
    (.arrow .lin .bit .bit) :=  
.lamL CtxUAllBit.nil CtxLAllSomeFragment.nil fragment_bit_admissible  
  Ty.FirstOrder.bit Ty.SemanticFragment.bit fragCert_varL0_bit
```

### 5.3.272 Definition of the fragment certificate of the linear application of the identity of the bit

**Definition.** Closed  $\beta$ -redex app  $(\lambda x. x)$  (bitLit b).

**Construction.** Defined by an explicit formula built from the empty list, the bit, the fragment certificate lambda linear identity bit and the closed term bit lit certificate.

**Lean 4 source** `QLambda/Linear/FragmentIdentityBeta.lean`

```
noncomputable def fragCert_appL_id_bit (b : Bool) :  
  FragCert [] []  
    (.app (.lam .lin .bit (.var .lin 0)) (.bitLit b)) .bit :=  
.appL CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil  
  Ty.FirstOrder.bit Ty.SemanticFragment.bit  
  fragCert_lamL_id_bit (FragCert.closed_bitLit_cert b)
```

### 5.3.273 Unrestricted identity body unrestricted variable of 0

**Definition.** Unrestricted identity body  $\text{varU } 0$ .

**Construction.** Defined by an explicit formula built from the fragment context unrestricted bit empty list, the empty list, the zero and the fragment bit duplicability.

**Lean 4 source** `QLambda/Linear/FragmentIdentityBeta.lean`

```
noncomputable def fragCert_varU0_bit :  
  FragCert [.bit] [] (.var .unres 0) .bit :=  
.varU fragment_ctxU_bit_nil CtxLAllSomeFragment.nil Lookup.zero  
  fragment_bit_duplicable trivial Ty.SemanticFragment.bit
```

### 5.3.274 Definition of the fragment certificate of the unrestricted lambda abstraction of the identity of the bit

**Definition.** Closed unrestricted identity combinator  $\lambda x. x$  at bit.

**Construction.** Defined by an explicit formula built from the empty list, the fragment bit admissibility, the fragment bit duplicability and the bit.

### Lean 4 source `QLambda/Linear/FragmentIdentityBeta.lean`

```
noncomputable def fragCert_lamU_id_bit :
  FragCert [] [] (.lam .unres .bit (.var .unres 0))
    (.arrow .unres .bit .bit) :=
.lamU CtxUAllBit.nil CtxLAllSomeFragment.nil fragment_bit_admissible
fragment_bit_duplicable
trivial (.arrowUnresBit Ty.SemanticFragment.bit) fragCert_varU0_bit
```

#### 5.3.275 Closed $\beta$ -redex unrestricted application

**Definition.** Closed  $\beta$ -redex appU  $(\lambda x. x)$  (bitLit b).

**Construction.** Defined by an explicit formula built from the empty list, the bit, the fragment certificate lambda unrestricted identity bit and the closed term bit lit certificate.

### Lean 4 source `QLambda/Linear/FragmentIdentityBeta.lean`

```
noncomputable def fragCert_appU_id_bit (b : Bool) :
  FragCert [] []
    (.app (.lam .unres .bit (.var .unres 0)) (.bitLit b)) .bit :=
.appU CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil trivial
Ty.SemanticFragment.bit fragCert_lamU_id_bit
(FragCert.closed_bitLit_cert b)
```

#### 5.3.276 Identity-body linear projection unfolds to unitors (enables closed $\beta$ )

**Statement.** Identity-body linear projection unfolds to unitors (enables closed  $\beta$ ).

**Proof.** By definition. Unfolding the denotation turns the left-hand side, the denotation of the fragment certificate variable linear 0 unit, into the right-hand side, an explicit expression in the composition, the left unitor, the fragment module and the functorial action; the two sides are the same term.

### Lean 4 source `QLambda/Linear/FragmentIdentityBeta.lean`

```
theorem fragCert_varL0_unit_denote :
  FragCert.denote fragCert_varL0_unit =
  Hom.comp (DayTensor.leftUnitor (fragmentModule .unit))
    (DayTensor.map (Hom.id dayTensorUnit))
    (Hom.comp (DayTensor.rightUnitor (fragmentModule .unit))
      (DayTensor.map (Hom.id (fragmentModule .unit))
        (Hom.id dayTensorUnit)))) := by
  rfl
```

#### 5.3.277 Spine expansion of the closed unit identity redex through FO Day eval

**Statement.** Spine expansion of the closed unit identity redex through FO Day eval.

**Proof.** This is an instance of the semantic substitution spine for linear application: denotation of linear application of `arg` expands as evaluation, applied to the empty list for all-bit unrestricted contexts, the empty list for fully occupied fragment linear contexts, the empty list for all-fragment unrestricted contexts, the closed identity  $\beta$  certificate constructors, the definition of the unit, the unit for semantic fragments,

the definition of the fragment certificate variable linear 0 unit and the definition of the closed term unit certificate.

#### Lean 4 source `QLambda/Linear/FragmentIdentityBeta.lean`

```
theorem fragment_betaL_id_unit_spine :
  FragCert.denote fragCert_appL_id_unit =
    Hom.comp
      (FragmentContext.evalFragmentFirstOrder Ty.FirstOrder.unit _)
      (Hom.comp
        (DayTensor.map
          (FragmentContext.abstractLinear Ty.FirstOrder.unit
            (FragCert.denote fragCert_varL0_unit))
          (FragCert.denote FragCert.closed_unit_cert))
        (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil)) :=
  fragment_subst_lin_spine CtxUAllBit.nil CtxLAllSomeFragment.nil
    OSplit.nil fragment_unit_admissible Ty.FirstOrder.unit Ty.SemanticFragment.unit
    CtxLAllSomeFragment.nil fragCert_varL0_unit FragCert.closed_unit_cert
```

### 5.3.278 Spine expansion of the closed bit identity redex

**Statement.** Spine expansion of the closed bit identity redex.

**Proof.** This is an instance of the semantic substitution spine for linear application: denotation of linear application of `arg` expands as evaluation, applied to the empty list for all-bit unrestricted contexts, the empty list for fully occupied fragment linear contexts, the empty list for all-fragment unrestricted contexts, the admissibility of the fragment of the bit, the definition of the bit, the bit for semantic fragments, the definition of the fragment certificate variable linear 0 bit and the definition of the closed term bit lit certificate.

#### Lean 4 source `QLambda/Linear/FragmentIdentityBeta.lean`

```
theorem fragment_betaL_id_bit_spine (b : Bool) :
  FragCert.denote (fragCert_appL_id_bit b) =
    Hom.comp
      (FragmentContext.evalFragmentFirstOrder Ty.FirstOrder.bit _)
      (Hom.comp
        (DayTensor.map
          (FragmentContext.abstractLinear Ty.FirstOrder.bit
            (FragCert.denote fragCert_varL0_bit))
          (FragCert.denote (FragCert.closed_bitLit_cert b)))
        (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil)) :=
  fragment_subst_lin_spine CtxUAllBit.nil CtxLAllSomeFragment.nil
    OSplit.nil fragment_bit_admissible Ty.FirstOrder.bit Ty.SemanticFragment.bit
    CtxLAllSomeFragment.nil fragCert_varL0_bit (FragCert.closed_bitLit_cert b)
```

### 5.3.279 Spine expansion of the closed unrestricted bit identity redex

**Statement.** Spine expansion of the closed unrestricted bit identity redex.

**Proof.** This is an instance of the semantic substitution spine for unrestricted bit application, applied to the empty list for all-bit unrestricted contexts, the empty list for fully occupied fragment linear contexts, the empty list for all-fragment unrestricted contexts, the admissibility of the fragment of the bit, the duplicability

of the fragment of the bit, the bit for semantic fragments, the definition of the fragment certificate variable unrestricted 0 bit and the definition of the closed term bit lit certificate.

#### Lean 4 source `QLambda/Linear/FragmentIdentityBeta.lean`

```
theorem fragment_betaU_id_bit_spine (b : Bool) :
  FragCert.denote (fragCert_appU_id_bit b) =
    Hom.comp (FragmentContext.evalUnrestrictedBit _)
      (Hom.comp
        (DayTensor.map
          (FragmentContext.abstractUnrestricted
            (FragCert.denote fragCert_varU0_bit))
          (FragCert.denote (FragCert.closed_bitLit_cert b)))
        (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil)) :=
  fragment_subst_unres_bit_spine CtxUAllBit.nil
  CtxLAllSomeFragment.nil OSplit.nil fragment_bit_admissible fragment_bit_duplicable
  trivial
  (.arrowUnresBit Ty.SemanticFragment.bit) Ty.SemanticFragment.bit
  CtxLAllSomeFragment.nil trivial fragCert_varU0_bit
  (FragCert.closed_bitLit_cert b)
```

### 5.3.280 Unpair denotation expands through pair elimination application

**Statement.** Unpair denotation expands through unpairApply.

**Proof.** This is an instance of the formula for the denotation of the pair elimination, applied to the hypothesis that every unrestricted variable of  $\Gamma$  has bit type, the hypothesis that every cell of the linear context  $\Delta$  is occupied by a fragment type, the hypothesis that  $\Delta$  splits into the left part  $\Delta_1$  and the right part  $\Delta_2$ , the hypothesis that A is a first-order type, the hypothesis that B is a first-order type and the hypothesis that C lies in the semantic fragment.

#### Lean 4 source `QLambda/Linear/FragmentIdentityBeta.lean`

```
theorem fragment_unpair_beta_spine {Gamma Delta Delta_1 Delta_2 A B C M K}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hA : Ty.FirstOrder A) (hB : Ty.FirstOrder B)
  (hC : Ty.SemanticFragment C)
  (cM : FragCert Gamma Delta_1 M (.tensor A B))
  (cK : FragCert Gamma Delta_2 K (.arrow .lin A (.arrow .lin B C))) :
  FragCert.denote (.unpair hGamma hDelta hs hA hB hC cM cK) =
    Hom.comp (FragmentContext.unpairApply hA hB _)
      (Hom.comp
        (DayTensor.map (FragCert.denote cM) (FragCert.denote cK))
        (FragmentContext.combinedOSplit hGamma hs)) :=
  FragCert.denote_unpair_eq hGamma hDelta hs hA hB hC cM cK
```

### 5.3.281 Identity linear body simplifies to $\lambda \circ (\text{id} \otimes \rho)$

**Statement.** Identity linear body simplifies to  $\lambda \circ (\text{id} \otimes \rho)$ .

**Proof.** The key step rewrites with the identity-body linear projection unfolds to unitors (enables closed  $\beta$ ), the fact that the functorial action for Day tensor products preserves identities and the fact that the identity is a right unit for composition for module morphisms.

### Lean 4 source `QLambda/Linear/FragmentIdentityBeta.lean`

```
theorem fragCert_varL0_unit_denote_simple :
  FragCert.denote fragCert_varL0_unit =
    Hom.comp (DayTensor.leftUnitor (fragmentModule .unit))
      (DayTensor.map (Hom.id dayTensorUnit)
        (DayTensor.rightUnitor (fragmentModule .unit))) := by
  rw [fragCert_varL0_unit_denote, DayTensor.map_id, Hom.comp_id]
```

#### 5.3.282 Denotation of the fragment certificate of the linear variable at index zero of the bit

**Statement.** The denotation of the fragment certificate variable linear 0 bit equals an explicit expression in the composition, the left unitor, the fragment module and the functorial action.

**Proof.** By definition. Unfolding the denotation turns the left-hand side, the denotation of the fragment certificate variable linear 0 bit, into the right-hand side, an explicit expression in the composition, the left unitor, the fragment module and the functorial action; the two sides are the same term.

### Lean 4 source `QLambda/Linear/FragmentIdentityBeta.lean`

```
theorem fragCert_varL0_bit_denote :
  FragCert.denote fragCert_varL0_bit =
    Hom.comp (DayTensor.leftUnitor (fragmentModule .bit))
      (DayTensor.map (Hom.id dayTensorUnit)
        (Hom.comp (DayTensor.rightUnitor (fragmentModule .bit))
          (DayTensor.map (Hom.id (fragmentModule .bit))
            (Hom.id dayTensorUnit)))) := by
  rfl
```

#### 5.3.283 Fragment certificate of the linear variable at index zero of the bit of the denotation of the simple

**Statement.** The denotation of the fragment certificate variable linear 0 bit equals the composite of the left unitor of `fragmentModule .bit` after the functorial action of `Hom.id dayTensorUnit` and `DayTensor.rightUnitor (fragmentModule .bit)`.

**Proof.** The key step rewrites with the denotation of the fragment certificate of the linear variable at index zero of the bit, the fact that the functorial action for Day tensor products preserves identities and the fact that the identity is a right unit for composition for module morphisms.

### Lean 4 source `QLambda/Linear/FragmentIdentityBeta.lean`

```
theorem fragCert_varL0_bit_denote_simple :
  FragCert.denote fragCert_varL0_bit =
    Hom.comp (DayTensor.leftUnitor (fragmentModule .bit))
      (DayTensor.map (Hom.id dayTensorUnit)
        (DayTensor.rightUnitor (fragmentModule .bit))) := by
  rw [fragCert_varL0_bit_denote, DayTensor.map_id, Hom.comp_id]
```

### 5.3.284 Closed identity move/split cancellation against a Day-unit point

**Statement.** Closed identity move/split cancellation against a Day-unit point.

**Proof.** The key step rewrites with the fact that composition for module morphisms is associative, the combined closed term collapse of the inverse left unitor for context interpretations, the fact that the identity is a right unit for composition for module morphisms and the formula for the closed term left unitor inverse.

**Lean 4 source** `QLambda/Linear/FragmentIdentityBeta.lean`

```
theorem closed_identity_move_cancel {A : Module}
  (f : Hom dayTensorUnit A) :
  Hom.comp
    (Hom.comp (DayTensor.leftUnitor A)
      (DayTensor.map (DayTensor.rightUnitor dayTensorUnit) (Hom.id A)))
    (Hom.comp
      (DayTensor.map (Hom.id (FragmentContext.combined [] []))
        (Hom.comp f FragmentContext.combinedClosedCollapse))
      (DayTensor.map FragmentContext.closedLeftUnitorInv
        FragmentContext.closedLeftUnitorInv)) =
  Hom.comp f FragmentContext.combinedClosedCollapse := by
have hsplit :
  Hom.comp
    (DayTensor.map (Hom.id (FragmentContext.combined [] []))
      (Hom.comp f FragmentContext.combinedClosedCollapse))
    (DayTensor.map FragmentContext.closedLeftUnitorInv
      FragmentContext.closedLeftUnitorInv) =
  DayTensor.map FragmentContext.closedLeftUnitorInv f := by
have h :=
  (DayTensor.map_comp
    (Hom.id (FragmentContext.combined [] []))
    FragmentContext.closedLeftUnitorInv
    (Hom.comp f FragmentContext.combinedClosedCollapse)
    FragmentContext.closedLeftUnitorInv).symm
have h' :
  Hom.comp
    (DayTensor.map (Hom.id (FragmentContext.combined [] []))
      (Hom.comp f FragmentContext.combinedClosedCollapse))
    (DayTensor.map FragmentContext.closedLeftUnitorInv
      FragmentContext.closedLeftUnitorInv) =
  DayTensor.map FragmentContext.closedLeftUnitorInv
    (Hom.comp (Hom.comp f FragmentContext.combinedClosedCollapse)
      FragmentContext.closedLeftUnitorInv) := by
  simpa only [Hom.id_comp] using h
refine h'.trans ?_
have hf :
  Hom.comp (Hom.comp f FragmentContext.combinedClosedCollapse)
    FragmentContext.closedLeftUnitorInv =
  f := by
  rw [ <- Hom.comp_assoc, FragmentContext.combinedClosedCollapse_leftUnitorInv,
    Hom.comp_id]
  exact congrArg _ hf
have hcancel :
  Hom.comp (DayTensor.rightUnitor dayTensorUnit)
    FragmentContext.closedLeftUnitorInv =
  Hom.id dayTensorUnit := by
  rw [FragmentContext.closedLeftUnitorInv_eq]
```

```

exact FragmentContext.rightUnitor_comp_leftUnitorInv_unit
have hcollapse :
  FragmentContext.combinedClosedCollapse =
    DayTensor.leftUnitor dayTensorUnit := by
change Hom.comp (DayTensor.leftUnitor dayTensorUnit)
  (DayTensor.map (Hom.id dayTensorUnit) (Hom.id dayTensorUnit)) =
  DayTensor.leftUnitor dayTensorUnit
rw [DayTensor.map_id, Hom.comp_id]
refine Eq.trans (congrArg _ hsplit) ?_
refine Eq.trans ((Hom.comp_assoc _ _ _).symm) ?_
-- Goal: fun comp (map ? id comp map fun inv f) = f comp collapse
have hmap :
  Hom.comp
    (DayTensor.map (DayTensor.rightUnitor dayTensorUnit) (Hom.id A))
    (DayTensor.map FragmentContext.closedLeftUnitorInv f) =
  DayTensor.map (Hom.id dayTensorUnit) f := by
have h :=
  (DayTensor.map_comp (DayTensor.rightUnitor dayTensorUnit)
    FragmentContext.closedLeftUnitorInv (Hom.id A) f).symm
-- map ? id comp map fun inv f = map (? comp fun inv) (id comp f)
refine h.trans ?_
rw [hcancel, Hom.id_comp]
refine Eq.trans (congrArg (Hom.comp (DayTensor.leftUnitor A)) hmap) ?_
-- Goal: fun comp map id f = f comp collapse
refine Eq.trans (leftUnitor_natural f) ?_
exact congrArg (Hom.comp f) hcollapse.symm

```

### 5.3.285 Fragment packaging: identity body $\circ$ move $\circ$ map id arg $\circ$ split

**Statement.** Fragment packaging: identity body  $\circ$  move  $\circ$  map id arg  $\circ$  split.

**Proof.** The key step rewrites with the fact that identity-body projection composed with move argument into linear reduces to  $\lambda \circ (\rho \otimes \text{id})$ , the fact that empty combined split is the Day-unit pairing  $\lambda^{-1} \otimes \lambda^{-1}$ , the definition of the closed term point and the fact that closed identity move/split cancellation against a Day-unit point.

#### Lean 4 source `QLambda/Linear/FragmentIdentityBeta.lean`

```

theorem closed_identity_move_cancel_frag {A : Module}
  (f : Hom dayTensorUnit A) :
  Hom.comp
    (Hom.comp
      (Hom.comp (DayTensor.leftUnitor A)
        (DayTensor.map (Hom.id dayTensorUnit) (DayTensor.rightUnitor A)))
      (FragmentContext.moveArgumentIntoLinear dayTensorUnit dayTensorUnit A))
    (Hom.comp
      (DayTensor.map (Hom.id (FragmentContext.combined [] []))
        (FragmentContext.closedPoint f))
      (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil)) =
  FragmentContext.closedPoint f := by
rw [FragmentContext.identity_body_move_eq]
have h0 :
  FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil =
  DayTensor.map FragmentContext.closedLeftUnitorInv
    FragmentContext.closedLeftUnitorInv := by

```

```

    rw [FragmentContext.combinedOSplit_nil]; rfl
  rw [h0, FragmentContext.closedPoint]
  exact closed_identity_move_cancel f

```

### 5.3.286 Helper: FO Day $\beta$ plus move/split cancellation for a closed identity body

**Statement.** Helper: FO Day  $\beta$  plus move/split cancellation for a closed identity body.

**Proof.** The key step rewrites with the fact that composition for module morphisms is associative, the hypothesis that `body` equals the composite of the left unitor of `fragmentModule A` after the functorial action of `Hom.id dayTensorUnit` and `DayTensor.rightUnitor (fragmentModule A)`, the fragment Day  $\beta$ : evaluating an FO-abstracted body recovers the moved body and the fact that fragment packaging: `identity body  $\circ$  move  $\circ$  map id arg  $\circ$  split`.

#### Lean 4 source `QLambda/Linear/FragmentIdentityBeta.lean`

```

private theorem fragment_betaL_id_closed_aux {A : Ty}
  (hA : Ty.FirstOrder A)
  (body : Hom
    (dayTensor dayTensorUnit
      (dayTensor (fragmentModule A) dayTensorUnit))
    (fragmentModule A))
  (f : Hom dayTensorUnit (fragmentModule A))
  (hbody :
    body =
      Hom.comp (DayTensor.leftUnitor (fragmentModule A))
        (DayTensor.map (Hom.id dayTensorUnit)
          (DayTensor.rightUnitor (fragmentModule A)))) :
  Hom.comp (FragmentContext.evalFragmentFirstOrder hA _)
    (Hom.comp
      (DayTensor.map (FragmentContext.abstractLinear hA body)
        (FragmentContext.closedPoint f))
      (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil)) =
  FragmentContext.closedPoint f := by
  let ? : Hom (FragmentContext.combined [] [])
    (internalHomRepresentable A.hilbertDim (fragmentModule A)) :=
    FragmentContext.abstractLinear hA body
  have h? : ? = FragmentContext.abstractLinear hA body := rfl
  have hfactor :
    DayTensor.map ? (FragmentContext.closedPoint f) =
      Hom.comp (DayTensor.map ? (Hom.id (fragmentModule A)))
        (DayTensor.map (Hom.id (FragmentContext.combined [] []))
          (FragmentContext.closedPoint f)) := by
    simp only [Hom.comp_id, Hom.id_comp] using
      DayTensor.map_comp ? (Hom.id (FragmentContext.combined [] []))
        (Hom.id (fragmentModule A)) (FragmentContext.closedPoint f)
  -- Rewrite the goal to use ?
  change Hom.comp (FragmentContext.evalFragmentFirstOrder hA _)
    (Hom.comp (DayTensor.map ? (FragmentContext.closedPoint f))
      (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil)) =
    FragmentContext.closedPoint f
  rw [hfactor]
  -- eval comp ((map ? id comp map id arg) comp split)
  have hreassoc :
    Hom.comp (FragmentContext.evalFragmentFirstOrder hA _)

```



```

(Hom.comp
  (Hom.comp (DayTensor.map ? (Hom.id (fragmentModule A)))
    (DayTensor.map (Hom.id (FragmentContext.combined [] []))
      (FragmentContext.closedPoint f)))
  (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil)) =
Hom.comp
  (Hom.comp (FragmentContext.evalFragmentFirstOrder hA _)
    (DayTensor.map ? (Hom.id (fragmentModule A))))
  (Hom.comp
    (DayTensor.map (Hom.id (FragmentContext.combined [] []))
      (FragmentContext.closedPoint f))
    (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil)) := by
  rw [Hom.comp_assoc, Hom.comp_assoc, <- Hom.comp_assoc]
  rw [hreassoc]
  -- FO b: eval comp map ? id = body comp move, after unfolding ?
  have hb :
    Hom.comp (FragmentContext.evalFragmentFirstOrder hA _)
      (DayTensor.map ? (Hom.id (fragmentModule A))) =
    Hom.comp body
      (FragmentContext.moveArgumentIntoLinear dayTensorUnit dayTensorUnit
        (fragmentModule A)) := by
    rw [h?]
    exact FragmentContext.evalFragmentFirstOrder_abstractLinear hA body
  rw [hb, hbody]
  exact closed_identity_move_cancel_frag f

```

### 5.3.287 Fragment of the linear $\beta$ -reduction of the identity of the unit

**Statement.** Closed linear identity  $\beta$  at unit:  $\text{app } (\lambda x. x) \text{ unit} = \text{unit}$ . Formally:  $\text{FragCert.denote fragCert\_appL\_id\_unit} = \text{FragCert.denote FragCert.closed\_unit\_cert}$ .

**Proof.** The key step rewrites with the spine expansion of the closed unit identity redex through FO Day eval and the fact that helper: FO Day  $\beta$  plus move/split cancellation for a closed identity body.

#### Lean 4 source `QLambda/Linear/FragmentIdentityBeta.lean`

```

theorem fragment_betaL_id_unit :
  FragCert.denote fragCert_appL_id_unit =
  FragCert.denote FragCert.closed_unit_cert := by
  have harg :
    FragCert.denote FragCert.closed_unit_cert =
    FragmentContext.closedPoint routeAFragmentModel.unitIntro :=
    fragment_step_denote_sound_unit FragCert.closed_unit_cert
  rw [fragment_betaL_id_unit_spine, harg]
  exact fragment_betaL_id_closed_aux Ty.FirstOrder.unit _
    routeAFragmentModel.unitIntro fragCert_varL0_unit_denote_simple

```

### 5.3.288 Fragment of the linear $\beta$ -reduction of the identity of the bit

**Statement.** Closed linear identity  $\beta$  at bit:  $\text{app } (\lambda x. x) (\text{bitLit } b) = \text{bitLit } b$ . Formally:  $\text{FragCert.denote (fragCert\_appL\_id\_bit } b) = \text{FragCert.denote (FragCert.closed\_bitLit\_cert } b)$ .

**Proof.** The key step rewrites with the spine expansion of the closed bit identity redex and the fact that helper: FO Day  $\beta$  plus move/split cancellation for a closed identity body.

#### Lean 4 source `QLambda/Linear/FragmentIdentityBeta.lean`

```
theorem fragment_betaL_id_bit (b : Bool) :
  FragCert.denote (fragCert_appL_id_bit b) =
    FragCert.denote (FragCert.closed_bitLit_cert b) := by
  have harg :
    FragCert.denote (FragCert.closed_bitLit_cert b) =
      FragmentContext.closedPoint (bitLitHom b) :=
    FragCert.closed_bitLit_denote_eq b
  rw [fragment_betaL_id_bit_spine, harg]
  exact fragment_betaL_id_closed_aux Ty.FirstOrder.bit _
    (bitLitHom b) fragCert_varL0_bit_denote_simple
```

### 5.3.289 Unrestricted identity body unfolds through structural lookup

**Statement.** Unrestricted identity body unfolds through structural lookup.

**Proof.** By definition. Unfolding the denotation turns the left-hand side, the denotation of the fragment certificate variable unrestricted 0 bit, into the right-hand side, an explicit expression in the composition, the right unitor, the fragment module and the functorial action; the two sides are the same term.

#### Lean 4 source `QLambda/Linear/FragmentIdentityBeta.lean`

```
theorem fragCert_varU0_bit_denote :
  FragCert.denote fragCert_varU0_bit =
    Hom.comp (DayTensor.rightUnitor (fragmentModule .bit))
      (DayTensor.map
        (Hom.comp (DayTensor.rightUnitor (fragmentModule .bit))
          (DayTensor.map classicalBitInclusion (Hom.id dayTensorUnit)))
        (Hom.id dayTensorUnit)) := by
  rfl
```

### 5.3.290 Unrestricted identity body unfolds to $\text{incl} \circ \rho$ and $\rho$

**Statement.** Unrestricted identity body unfolds to  $\text{incl} \circ \rho \circ \rho$ .

**Proof.** The key step rewrites with the unrestricted identity body unfolds through structural lookup, the fragment module of a bit and the naturality of the right unitor.

#### Lean 4 source `QLambda/Linear/FragmentIdentityBeta.lean`

```
theorem fragCert_varU0_bit_denote_simple :
  FragCert.denote fragCert_varU0_bit =
    Hom.comp classicalBitInclusion
      (Hom.comp (DayTensor.rightUnitor classicalBitModule)
        (DayTensor.rightUnitor
          (dayTensor classicalBitModule dayTensorUnit))) := by
  rw [fragCert_varU0_bit_denote]
  simp only [fragmentModule_bit]
  have h1 :=
    rightUnitor_natural
```

```

(Hom.comp (DayTensor.rightUnitor (representable 2))
 (DayTensor.map classicalBitInclusion (Hom.id dayTensorUnit)))
change Hom.comp (DayTensor.rightUnitor (representable 2))
(DayTensor.map
 (Hom.comp (DayTensor.rightUnitor (representable 2))
 (DayTensor.map classicalBitInclusion (Hom.id dayTensorUnit)))
 (Hom.id dayTensorUnit)) =
Hom.comp classicalBitInclusion
(Hom.comp (DayTensor.rightUnitor classicalBitModule)
 (DayTensor.rightUnitor
 (dayTensor classicalBitModule dayTensorUnit)))
rw [h1, rightUnitor_natural classicalBitInclusion]
rfl

```

### 5.3.291 Regroup the unrestricted identity composite so that the body unitors sit next to the move

**Statement.** Regroup the unrestricted identity composite so that the body unitors sit next to the move, and the classicalize sits next to the closed argument.

**Proof.** The goal is simplified using the fact that composition for module morphisms is associative.

#### Lean 4 source `QLambda/Linear/FragmentIdentityBeta.lean`

```

private theorem unres_identity_regroup {A_0 A_1 A_2 A_3 A? A? A? : Module}
  (i : Hom A? A?) (r : Hom A? A?) (m : Hom A_3 A?) (c : Hom A_2 A_3)
  (p : Hom A_1 A_2) (s : Hom A_0 A_1) :
  Hom.comp (Hom.comp (Hom.comp i r) (Hom.comp m c)) (Hom.comp p s) =
  Hom.comp i (Hom.comp (Hom.comp r m) (Hom.comp (Hom.comp c p) s)) := by
  simp only [Hom.comp_assoc]

```

### 5.3.292 Cancel unrestricted identity body $\circ$ move $\circ$ classicalize $\circ$ closed point $\circ$ split

**Statement.** Cancel unrestricted identity body  $\circ$  move  $\circ$  classicalize  $\circ$  closed point  $\circ$  split.

**Proof.** The key step rewrites with the fact that empty combined split is the Day-unit pairing  $\lambda^{-1} \otimes \lambda^{-1}$ , the definition of the closed term point, the fact that composition for module morphisms is associative and the fact that closed identity move/split cancellation against a Day-unit point.

#### Lean 4 source `QLambda/Linear/FragmentIdentityBeta.lean`

```

private theorem closed_unres_identity_cancel
  (f : Hom dayTensorUnit (fragmentModule .bit))
  (hfix :
    Hom.comp classicalBitInclusion (Hom.comp bitClassicalize f) = f) :
  Hom.comp
    (Hom.comp
      (Hom.comp classicalBitInclusion
        (Hom.comp (DayTensor.rightUnitor classicalBitModule)
          (DayTensor.rightUnitor
            (dayTensor classicalBitModule dayTensorUnit)))))
      (Hom.comp
        (FragmentContext.moveArgumentIntoUnrestricted
          dayTensorUnit dayTensorUnit classicalBitModule)
        (DayTensor.map (Hom.id (dayTensor dayTensorUnit dayTensorUnit))

```

```

        bitClassicalize)))
    (Hom.comp
      (DayTensor.map (Hom.id (FragmentContext.combined [] []))
        (FragmentContext.closedPoint f))
      (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil)) =
    FragmentContext.closedPoint f := by
have hmove := FragmentContext.identity_body_unres_move_eq classicalBitModule
have h0 :
  FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil =
  DayTensor.map FragmentContext.closedLeftUnitorInv
    FragmentContext.closedLeftUnitorInv := by
  rw [FragmentContext.combinedOSplit_nil]; rfl
have hfuse :
  Hom.comp bitClassicalize (FragmentContext.closedPoint f) =
  FragmentContext.closedPoint (Hom.comp bitClassicalize f) := by
  simp only [FragmentContext.closedPoint]
  exact Hom.comp_assoc bitClassicalize f
  FragmentContext.combinedClosedCollapse
-- Fuse the classicalize with the closed argument.
have hmap :
  Hom.comp
    (DayTensor.map (Hom.id (dayTensor dayTensorUnit dayTensorUnit))
      bitClassicalize)
    (DayTensor.map (Hom.id (FragmentContext.combined [] []))
      (FragmentContext.closedPoint f)) =
  DayTensor.map (Hom.id (FragmentContext.combined [] []))
    (FragmentContext.closedPoint (Hom.comp bitClassicalize f)) := by
  rw [ <- hfuse]
change Hom.comp
  (DayTensor.map (Hom.id (FragmentContext.combined [] [])) bitClassicalize)
  (DayTensor.map (Hom.id (FragmentContext.combined [] []))
    (FragmentContext.closedPoint f)) =
  DayTensor.map (Hom.id (FragmentContext.combined [] []))
    (Hom.comp bitClassicalize (FragmentContext.closedPoint f))
  simp only [Hom.id_comp] using
    (DayTensor.map_comp
      (Hom.id (FragmentContext.combined [] []))
      (Hom.id (FragmentContext.combined [] []))
      bitClassicalize (FragmentContext.closedPoint f)).symm
-- The linear cancellation lemma at the classicalized argument.
have hcancel :
  Hom.comp
    (Hom.comp (DayTensor.leftUnitor classicalBitModule)
      (DayTensor.map (DayTensor.rightUnitor dayTensorUnit)
        (Hom.id classicalBitModule)))
    (Hom.comp
      (DayTensor.map (Hom.id (FragmentContext.combined [] []))
        (FragmentContext.closedPoint (Hom.comp bitClassicalize f)))
      (DayTensor.map FragmentContext.closedLeftUnitorInv
        FragmentContext.closedLeftUnitorInv)) =
  FragmentContext.closedPoint (Hom.comp bitClassicalize f) := by
  rw [FragmentContext.closedPoint]
  exact closed_identity_move_cancel (Hom.comp bitClassicalize f)
refine Eq.trans (unres_identity_regroup _ _ _ _ _) ?_
rw [hmove, hmap, h0]
refine Eq.trans (congrArg (Hom.comp classicalBitInclusion) hcancel) ?_

```

```

-- Remaining: incl comp classicalize comp f = f, under the closed collapse.
simp only [FragmentContext.closedPoint]
exact Eq.trans
  (Hom.comp_assoc classicalBitInclusion (Hom.comp bitClassicalize f)
    FragmentContext.combinedClosedCollapse)
  (congrArg (fun g => Hom.comp g FragmentContext.combinedClosedCollapse) hfix)

```

### 5.3.293 Helper: unrestricted Day $\beta$ plus move/split/classicalize cancellation

**Statement.** Helper: unrestricted Day  $\beta$  plus move/split/classicalize cancellation.

**Proof.** The key step rewrites with the fact that composition for module morphisms is associative, the definition of the  $\varphi$ , the hypothesis that `body` equals an explicit expression in the composition, the classical bit inclusion, the right unitor and the classical bit superoperator module and the evaluation unrestricted bit of the abstract unrestricted for context interpretations.

#### Lean 4 source `QLambda/Linear/FragmentIdentityBeta.lean`

```

private theorem fragment_betaU_id_closed_aux
  (body : Hom
    (dayTensor (dayTensor classicalBitModule dayTensorUnit) dayTensorUnit)
    (fragmentModule .bit))
  (f : Hom dayTensorUnit (fragmentModule .bit))
  (hbody :
    body =
      Hom.comp classicalBitInclusion
        (Hom.comp (DayTensor.rightUnitor classicalBitModule)
          (DayTensor.rightUnitor
            (dayTensor classicalBitModule dayTensorUnit))))
  (hfix :
    Hom.comp classicalBitInclusion (Hom.comp bitClassicalize f) = f) :
  Hom.comp (FragmentContext.evalUnrestrictedBit _)
    (Hom.comp
      (DayTensor.map (FragmentContext.abstractUnrestricted body)
        (FragmentContext.closedPoint f))
      (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil)) =
    FragmentContext.closedPoint f := by
let ? : Hom (FragmentContext.combined [] [])
  (dayInternalHom classicalBitModule (fragmentModule .bit)) :=
  FragmentContext.abstractUnrestricted body
have hfactor :
  DayTensor.map ? (FragmentContext.closedPoint f) =
    Hom.comp (DayTensor.map ? (Hom.id (fragmentModule .bit)))
      (DayTensor.map (Hom.id (FragmentContext.combined [] []))
        (FragmentContext.closedPoint f)) := by
simp only [Hom.comp_id, Hom.id_comp] using
  DayTensor.map_comp ? (Hom.id (FragmentContext.combined [] []))
    (Hom.id (fragmentModule .bit)) (FragmentContext.closedPoint f)
change Hom.comp (FragmentContext.evalUnrestrictedBit _)
  (Hom.comp (DayTensor.map ? (FragmentContext.closedPoint f))
    (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil)) =
  FragmentContext.closedPoint f
rw [hfactor]
have hreassoc :
  Hom.comp (FragmentContext.evalUnrestrictedBit _)

```

```

(Hom.comp
  (Hom.comp (DayTensor.map ? (Hom.id (fragmentModule .bit)))
    (DayTensor.map (Hom.id (FragmentContext.combined [] []))
      (FragmentContext.closedPoint f)))
  (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil)) =
Hom.comp
  (Hom.comp (FragmentContext.evalUnrestrictedBit _)
    (DayTensor.map ? (Hom.id (fragmentModule .bit))))
  (Hom.comp
    (DayTensor.map (Hom.id (FragmentContext.combined [] []))
      (FragmentContext.closedPoint f))
    (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil)) := by
  rw [Hom.comp_assoc, Hom.comp_assoc, <- Hom.comp_assoc]
  rw [hreasoc]
  have hb :
    Hom.comp (FragmentContext.evalUnrestrictedBit _)
      (DayTensor.map ? (Hom.id (fragmentModule .bit))) =
    Hom.comp body
      (Hom.comp
        (FragmentContext.moveArgumentIntoUnrestricted
          dayTensorUnit dayTensorUnit classicalBitModule)
        (DayTensor.map (Hom.id (dayTensor dayTensorUnit dayTensorUnit))
          bitClassicalize)) := by
  dsimp [?]
  exact FragmentContext.evalUnrestrictedBit_abstractUnrestricted body
  rw [hb, hbody]
  exact closed_unres_identity_cancel f hfix

```

### 5.3.294 Closed unrestricted identity $\beta$ at bit: unrestricted application of **b**

**Statement.** Closed unrestricted identity  $\beta$  at bit:  $\text{appU } (\lambda x. x) \text{ (bitLit } b) = \text{bitLit } b$ .  
Formally:  $\text{FragCert.denote (fragCert\_appU\_id\_bit } b) = \text{FragCert.denote (FragCert.closed\_bitLit\_cert } b)$ .

**Proof.** The key step rewrites with the spine expansion of the closed unrestricted bit identity redex and the fact that helper: unrestricted Day  $\beta$  plus move/split/classicalize cancellation.

#### Lean 4 source `QLambda/Linear/FragmentIdentityBeta.lean`

```

theorem fragment_betaU_id_bit (b : Bool) :
  FragCert.denote (fragCert_appU_id_bit b) =
  FragCert.denote (FragCert.closed_bitLit_cert b) := by
  have harg :
    FragCert.denote (FragCert.closed_bitLit_cert b) =
    FragmentContext.closedPoint (bitLitHom b) :=
  FragCert.closed_bitLit_denote_eq b
  rw [fragment_betaU_id_bit_spine, harg]
  exact fragment_betaU_id_closed_aux _
    (bitLitHom b) fragCert_varU0_bit_denote_simple
    (classicalBitInclusion_comp_bitClassicalize_bitLit b)

```

### 5.3.295 F4b foothold: substituting a value for linear var 0 is the value (definitionally on terms)

**Statement.** F4b foothold: substituting a value for linear var 0 is the value (definitionally on terms). Formally: `Term.substLin 0 V (.var .lin 0) = V`.

**Proof.** The goal is simplified using the definition of the linear substitution and the linear de Bruijn shift of zero for terms.

**Lean 4 source** `QLambda/Linear/FragmentIdentityBeta.lean`

```
theorem substLin_varL0 (V : Term) :  
  Term.substLin 0 V (.var .lin 0) = V := by  
  simp [Term.substLin, Term.shiftLin_zero]
```

### 5.3.296 F4b: denotation of the closed linear identity redex equals the argument (packaged from the identity $\beta$ theorems)

**Statement.** F4b: denotation of the closed linear identity redex equals the argument (packaged from the identity  $\beta$  theorems). Formally: `FragCert.denote fragCert_appL_id_unit = FragCert.denote FragCert.closed_unit_cert`.

**Proof.** This is an instance of the fragment of the linear  $\beta$ -reduction of the identity of the unit.

**Lean 4 source** `QLambda/Linear/FragmentIdentityBeta.lean`

```
theorem fragment_substLin_id_denote_unit :  
  FragCert.denote fragCert_appL_id_unit =  
    FragCert.denote FragCert.closed_unit_cert :=  
  fragment_betaL_id_unit
```

### 5.3.297 Fragment of the linear substitution of the identity of the denotation of the bit

**Statement.** For a bit  $b$ : the denotation of the fragment certificate component linear identity bit of  $b$  equals the denotation of the closed term bit lit certificate of  $b$ .

**Proof.** This is an instance of the fragment of the linear  $\beta$ -reduction of the identity of the bit.

**Lean 4 source** `QLambda/Linear/FragmentIdentityBeta.lean`

```
theorem fragment_substLin_id_denote_bit (b : Bool) :  
  FragCert.denote (fragCert_appL_id_bit b) =  
    FragCert.denote (FragCert.closed_bitLit_cert b) :=  
  fragment_betaL_id_bit b
```

### 5.3.298 F4b: substituting at unrestricted var 0 returns the value

**Statement.** F4b: substituting at unrestricted var 0 returns the value. Formally: `Term.substUnres 0 V (.var .unres 0) = V`.

**Proof.** The goal is simplified using the definition of the unrestricted substitution and the unrestricted de Bruijn shift of zero.

**Lean 4 source** `QLambda/Linear/FragmentIdentityBeta.lean`

```

theorem substUnres_varU0 (V : Term) :
  Term.substUnres 0 V (.var .unres 0) = V := by
  simp [Term.substUnres, shiftUnres_zero]

```

### 5.3.299 Fragment of the unrestricted substitution of the identity of the denotation of the bit

**Statement.** F4b: denotation of the closed unrestricted identity redex equals the argument (packaged from the unrestricted identity  $\beta$  theorem). Formally: `FragCert.denote (fragCert_appU_id_bit b)` = `FragCert.denote (FragCert.closed_bitLit_cert b)`.

**Proof.** This is an instance of the closed unrestricted identity  $\beta$  at bit: unrestricted application of b.

#### Lean 4 source `QLambda/Linear/FragmentIdentityBeta.lean`

```

theorem fragment_substUnres_id_denote_bit (b : Bool) :
  FragCert.denote (fragCert_appU_id_bit b) =
    FragCert.denote (FragCert.closed_bitLit_cert b) :=
  fragment_betaU_id_bit b

```

### 5.3.300 Representable $\text{ite } \beta$ on bit literals

**Statement.** `## Representable ite  $\beta$  on bit literals.` Formally: `(bitLitHom true).app m q` = `Superoperator.comp (ChoiSum.isometricBasisPrep 1) q`.

**Proof.** It follows from the components of the Yoneda image.

#### Lean 4 source `QLambda/Linear/FragmentIteBeta.lean`

```

private theorem bitLitHom_app_true {m : Nat}
  (q : (dayTensorUnit.obj m).Carrier) :
  (bitLitHom true).app m q =
    Superoperator.comp (ChoiSum.isometricBasisPrep 1)
      (q : Superoperator m 1) := by
  change (yonedaMap (ChoiSum.isometricBasisPrep 1)).app m q = _
  exact yonedaMap_app (ChoiSum.isometricBasisPrep 1) (q : Superoperator m 1)

```

### 5.3.301 Bit lit morphism of the application of false

**Statement.** For a natural number m: `(bitLitHom false).app m q` equals the composite of the isometric basis preparation at 0 after q.

**Proof.** It follows from the components of the Yoneda image.

#### Lean 4 source `QLambda/Linear/FragmentIteBeta.lean`

```

private theorem bitLitHom_app_false {m : Nat}
  (q : (dayTensorUnit.obj m).Carrier) :
  (bitLitHom false).app m q =
    Superoperator.comp (ChoiSum.isometricBasisPrep 0)
      (q : Superoperator m 1) := by
  change (yonedaMap (ChoiSum.isometricBasisPrep 0)).app m q = _
  exact yonedaMap_app (ChoiSum.isometricBasisPrep 0) (q : Superoperator m 1)

```



### 5.3.302 The morphism unit act as composition

**Statement.** For natural numbers  $n, n', d$ , a module morphism  $T$ , a superoperator  $g$ : the application of  $n'$  and the act of  $y$  and  $g$  equals `Superoperator.comp T.app n y g : (representable d).obj n' |>.Carrier`.

**Proof.** It follows from the fact that observational equality is transitive.

#### Lean 4 source `QLambda/Linear/FragmentIteBeta.lean`

```
private theorem hom_unit_act_as_comp {n n' d : Nat}
  (y : (dayTensorUnit.obj n).Carrier)
  (T : Hom dayTensorUnit (representable d))
  (g : Superoperator n' n) :
  T.app n' (dayTensorUnit.act y g) =
    (Superoperator.comp (T.app n y : Superoperator n d) g :
      (representable d).obj n' |>.Carrier) := by
have h := (T.naturality y g).symm
have hact :
  (representable d).act (T.app n y) g =
    Superoperator.comp (T.app n y : Superoperator n d) g :=
  representable_act (T.app n y : Superoperator n d) g
exact h.symm.trans hact
```

### 5.3.303 Conditional elimination representable of the bit literal of the auxiliary

**Statement.** For a natural number  $d$ , a bit  $b$ , module morphisms  $T, E$ : under 1 hypotheses, the statement asserts a single property of the objects involved; the precise formulation is the Lean statement below.

**Proof.** The claim follows from a chain of equalities (or inequalities). The key step rewrites with the fact that composition for module morphisms is associative and the fact that the left unitor and its inverse compose to the identity.

#### Lean 4 source `QLambda/Linear/FragmentIteBeta.lean`

```
private theorem iteElimRepresentable_bitLit_aux (d : Nat) (b : Bool)
  (T E : Hom dayTensorUnit (representable d))
  (hThen :
    Hom.comp (iteElimRepresentable d)
      (DayTensor.map (bitLitHom b) (additivePair T E)) =
      Hom.comp (bif b then T else E)
        (DayTensor.leftUnitor dayTensorUnit)) :
  Hom.comp (iteElimRepresentable d)
    (Hom.comp
      (DayTensor.map (bitLitHom b) (additivePair T E))
      (DayTensor.leftUnitorInv dayTensorUnit)) =
    (bif b then T else E) := by
have h :=
  congrArg (fun f => Hom.comp f (DayTensor.leftUnitorInv dayTensorUnit)) hThen
calc
  Hom.comp (iteElimRepresentable d)
    (Hom.comp (DayTensor.map (bitLitHom b) (additivePair T E))
      (DayTensor.leftUnitorInv dayTensorUnit)) =
    Hom.comp
      (Hom.comp (iteElimRepresentable d)
```

```

      (DayTensor.map (bitLitHom b) (additivePair T E)))
    (DayTensor.leftUnitorInv dayTensorUnit) := by
  rw [Hom.comp_assoc]
_ = Hom.comp
  (Hom.comp (bif b then T else E)
    (DayTensor.leftUnitor dayTensorUnit))
  (DayTensor.leftUnitorInv dayTensorUnit) := h
_ = Hom.comp (bif b then T else E)
  (Hom.comp (DayTensor.leftUnitor dayTensorUnit)
    (DayTensor.leftUnitorInv dayTensorUnit)) := by
  rw [Hom.comp_assoc]
_ = Hom.comp (bif b then T else E) (Hom.id _) := by
  rw [DayTensor.leftUnitor_hom_inv]
_ = bif b then T else E := Hom.comp_id _

```

### 5.3.304 Conditional elimination representable of a composite of the bit literal of true

**Statement.** For a natural number  $d$ , module morphisms  $T, E$ : the composite of the conditional elimination representable of  $d$  after the functorial action of `bitLitHom true` and `additivePair T E` equals the composite of  $T$  after the left unitor of `dayTensorUnit`.

**Proof.** Both sides are compared pointwise (by extensionality). The claim follows from a chain of equalities (or inequalities). The key step rewrites with the components of the composition, the functorial action on an introduced element, the left unitor on an introduced element and the evaluation on an introduced element.

#### Lean 4 source `QLambda/Linear/FragmentIteBeta.lean`

```

theorem iteElimRepresentable_comp_bitLit_true (d : Nat)
  (T E : Hom dayTensorUnit (representable d)) :
  Hom.comp (iteElimRepresentable d)
    (DayTensor.map (bitLitHom true) (additivePair T E)) =
    Hom.comp T (DayTensor.leftUnitor dayTensorUnit) := by
  apply DayTensor.hom_ext
  intro m n q0 y0
  change Superoperator m 1 at q0
  change Superoperator n 1 at y0
  let qC : (dayTensorUnit.obj m).Carrier := q0
  let yC : (dayTensorUnit.obj n).Carrier := y0
  let psiT : Superoperator n d := T.app n yC
  let psiE : Superoperator n d := E.app n yC
  let g : Superoperator (m * n) n :=
    Superoperator.comp (Superoperator.tensorLeftUnitor n)
      (Superoperator.tensor q0 (Superoperator.identity n))
  simp only [Hom.comp_app]
  rw [DayTensor.map_intro (bitLitHom true) (additivePair T E) qC yC]
  rw [DayTensor.leftUnitor_intro (M := dayTensorUnit) qC yC]
  change
    DayCoend.evaluate (representable d) (iteRepresentableBilinear d)
      ((DayCoend.intro (representable 2)
        (additiveProduct (representable d) (representable d))).app
        ((bitLitHom true).app m qC) ((additivePair T E).app n yC)) =
      T.app (m * n) (dayTensorUnit.act yC g)
  rw [DayCoend.evaluate_intro]

```

```

have hpsiT :
  ((additivePair T E).app n yC).1 = psiT :=
  congrArg (fun f => f.app n yC) (additiveFst_pair T E)
have hpsiE :
  ((additivePair T E).app n yC).2 = psiE :=
  congrArg (fun f => f.app n yC) (additiveSnd_pair T E)
have hq : (bitLitHom true).app m qC =
  Superoperator.comp (ChoiSum.isometricBasisPrep 1) q0 :=
  bitLitHom_app_true qC
have hnatl :=
  prepBra_naturality (1 : Fin 2) (ChoiSum.isometricBasisPrep 1) q0
  (Superoperator.identity n)
have hnato :=
  prepBra_naturality (0 : Fin 2) (ChoiSum.isometricBasisPrep 1) q0
  (Superoperator.identity n)
have hnatl' :
  prepBra 1 (n := n)
    (Superoperator.comp (ChoiSum.isometricBasisPrep 1) q0) =
    Superoperator.comp (prepBra 1 (ChoiSum.isometricBasisPrep 1))
      (Superoperator.tensor q0 (Superoperator.identity n)) := by
  simpa [Superoperator.comp_identity, Superoperator.identity_comp] using
    hnatl.symm
have hnato' :
  prepBra 0 (n := n)
    (Superoperator.comp (ChoiSum.isometricBasisPrep 1) q0) =
    Superoperator.comp (prepBra 0 (ChoiSum.isometricBasisPrep 1))
      (Superoperator.tensor q0 (Superoperator.identity n)) := by
  simpa [Superoperator.comp_identity, Superoperator.identity_comp] using
    hnato.symm
apply Superoperator.ext
calc
  (Superoperator.comp
    ((additivePair T E).app n yC).1 : Superoperator n d)
    (prepBra 1 (n := n) ((bitLitHom true).app m qC)).cp +
    (Superoperator.comp
      ((additivePair T E).app n yC).2 : Superoperator n d)
      (prepBra 0 (n := n) ((bitLitHom true).app m qC)).cp =
    (Superoperator.comp psiT
      (prepBra 1 (n := n)
        (Superoperator.comp (ChoiSum.isometricBasisPrep 1) q0))).cp +
    (Superoperator.comp psiE
      (prepBra 0 (n := n)
        (Superoperator.comp (ChoiSum.isometricBasisPrep 1) q0))).cp := by
  rw [hpsiT, hpsiE, hq]
_ = (Superoperator.comp psiT
  (Superoperator.comp (prepBra 1 (ChoiSum.isometricBasisPrep 1))
    (Superoperator.tensor q0 (Superoperator.identity n)))).cp +
  (Superoperator.comp psiE
    (Superoperator.comp (prepBra 0 (ChoiSum.isometricBasisPrep 1))
      (Superoperator.tensor q0 (Superoperator.identity n)))).cp := by
  rw [hnatl', hnato']
_ = (Superoperator.comp psiT g).cp +
  (Superoperator.comp psiE
    (Superoperator.comp (0 : Superoperator (1 * n) n)
      (Superoperator.tensor q0 (Superoperator.identity n)))).cp := by
  rw [prepBra_isometricBasisPrep 1,

```

```

      prepBra_isometricBasisPrep_of_ne (by decide : (0 : Fin 2) != 1)]
_ = (Superoperator.comp psiT g).cp := by
  simp [Superoperator.comp_zero_left, Superoperator.comp_zero_right,
        Superoperator.cp_zero, add_zero]
_ = (T.app (m * n) (dayTensorUnit.act yC g) :
      Superoperator (m * n) d).cp := by
  exact congrArg Superoperator.cp (hom_unit_act_as_comp yC T g).symm

```

### 5.3.305 Conditional elimination representable of a composite of the bit literal of false

**Statement.** For a natural number  $d$ , module morphisms  $T, E$ : the composite of the conditional elimination representable of  $d$  after the functorial action of `bitLitHom false` and `additivePair T E` equals the composite of  $E$  after the left unitor of `dayTensorUnit`.

**Proof.** Both sides are compared pointwise (by extensionality). The claim follows from a chain of equalities (or inequalities). The key step rewrites with the components of the composition, the functorial action on an introduced element, the left unitor on an introduced element and the evaluation on an introduced element.

#### Lean 4 source `QLambda/Linear/FragmentIteBeta.lean`

```

theorem iteElimRepresentable_comp_bitLit_false (d : Nat)
  (T E : Hom dayTensorUnit (representable d)) :
  Hom.comp (iteElimRepresentable d)
    (DayTensor.map (bitLitHom false) (additivePair T E)) =
  Hom.comp E (DayTensor.leftUnitor dayTensorUnit) := by
  apply DayTensor.hom_ext
  intro m n q0 y0
  change Superoperator m 1 at q0
  change Superoperator n 1 at y0
  let qC : (dayTensorUnit.obj m).Carrier := q0
  let yC : (dayTensorUnit.obj n).Carrier := y0
  let psiT : Superoperator n d := T.app n yC
  let psiE : Superoperator n d := E.app n yC
  let g : Superoperator (m * n) n :=
    Superoperator.comp (Superoperator.tensorLeftUnitor n)
      (Superoperator.tensor q0 (Superoperator.identity n))
  simp only [Hom.comp_app]
  rw [DayTensor.map_intro (bitLitHom false) (additivePair T E) qC yC]
  rw [DayTensor.leftUnitor_intro (M := dayTensorUnit) qC yC]
  change
    DayCoend.evaluate (representable d) (iteRepresentableBilinear d)
      ((DayCoend.intro (representable 2)
        (additiveProduct (representable d) (representable d)).app
          ((bitLitHom false).app m qC) ((additivePair T E).app n yC)) =
        E.app (m * n) (dayTensorUnit.act yC g)
  rw [DayCoend.evaluate_intro]
  have hpsiT :
    ((additivePair T E).app n yC).1 = psiT :=
    congrArg (fun f => f.app n yC) (additiveFst_pair T E)
  have hpsiE :
    ((additivePair T E).app n yC).2 = psiE :=
    congrArg (fun f => f.app n yC) (additiveSnd_pair T E)
  have hq : (bitLitHom false).app m qC =

```

```

    Superoperator.comp (ChoiSum.isometricBasisPrep 0) q0 :=
    bitLitHom_app_false qC
have hnatl1 :=
    prepBra_naturality (1 : Fin 2) (ChoiSum.isometricBasisPrep 0) q0
    (Superoperator.identity n)
have hnato0 :=
    prepBra_naturality (0 : Fin 2) (ChoiSum.isometricBasisPrep 0) q0
    (Superoperator.identity n)
have hnatl1' :
    prepBra 1 (n := n)
    (Superoperator.comp (ChoiSum.isometricBasisPrep 0) q0) =
    Superoperator.comp (prepBra 1 (ChoiSum.isometricBasisPrep 0))
    (Superoperator.tensor q0 (Superoperator.identity n)) := by
    simp [Superoperator.comp_identity, Superoperator.identity_comp] using
    hnatl1.symm
have hnato0' :
    prepBra 0 (n := n)
    (Superoperator.comp (ChoiSum.isometricBasisPrep 0) q0) =
    Superoperator.comp (prepBra 0 (ChoiSum.isometricBasisPrep 0))
    (Superoperator.tensor q0 (Superoperator.identity n)) := by
    simp [Superoperator.comp_identity, Superoperator.identity_comp] using
    hnato0.symm
apply Superoperator.ext
calc
    (Superoperator.comp
      (((additivePair T E).app n yC).1 : Superoperator n d)
      (prepBra 1 (n := n) ((bitLitHom false).app m qC))).cp +
    (Superoperator.comp
      (((additivePair T E).app n yC).2 : Superoperator n d)
      (prepBra 0 (n := n) ((bitLitHom false).app m qC))).cp =
    (Superoperator.comp psiT
      (prepBra 1 (n := n)
        (Superoperator.comp (ChoiSum.isometricBasisPrep 0) q0))).cp +
    (Superoperator.comp psiE
      (prepBra 0 (n := n)
        (Superoperator.comp (ChoiSum.isometricBasisPrep 0) q0))).cp := by
    rw [hpsiT, hpsiE, hq]
_ = (Superoperator.comp psiT
    (Superoperator.comp (prepBra 1 (ChoiSum.isometricBasisPrep 0))
      (Superoperator.tensor q0 (Superoperator.identity n)))).cp +
    (Superoperator.comp psiE
      (Superoperator.comp (prepBra 0 (ChoiSum.isometricBasisPrep 0))
        (Superoperator.tensor q0 (Superoperator.identity n)))).cp := by
    rw [hnatl1', hnato0']
_ = (Superoperator.comp psiT
    (Superoperator.comp (0 : Superoperator (1 * n) n)
      (Superoperator.tensor q0 (Superoperator.identity n)))).cp +
    (Superoperator.comp psiE g).cp := by
    rw [prepBra_isometricBasisPrep 0,
      prepBra_isometricBasisPrep_of_ne (by decide : (1 : Fin 2) != 0)]
_ = (Superoperator.comp psiE g).cp := by
    simp [Superoperator.comp_zero_left, Superoperator.comp_zero_right,
      Superoperator.cp_zero, zero_add]
_ = (E.app (m * n) (dayTensorUnit.act yC g) :
    Superoperator (m * n) d).cp := by
    exact congrArg Superoperator.cp (hom_unit_act_as_comp yC E g).symm

```

### 5.3.306 Conditional elimination representable of a composite of the bit literal

**Statement.** For a natural number  $d$ , a bit  $b$ , module morphisms  $T, E$ : the composite of the conditional elimination representable of  $d$  after the functorial action of `bitLitHom b` and `additivePair T E` equals the composite of `bif b then T else E` after the left unitor of `dayTensorUnit`.

**Proof.** By case analysis on the bit  $b$ . For true and false, the claim is checked directly. It follows from the conditional elimination representable of a composite of the bit literal of true and the conditional elimination representable of a composite of the bit literal of false.

#### Lean 4 source `QLambda/Linear/FragmentIteBeta.lean`

```
theorem iteElimRepresentable_comp_bitLit (d : Nat) (b : Bool)
  (T E : Hom dayTensorUnit (representable d)) :
  Hom.comp (iteElimRepresentable d)
    (DayTensor.map (bitLitHom b) (additivePair T E)) =
  Hom.comp (bif b then T else E)
    (DayTensor.leftUnitor dayTensorUnit) := by
cases b with
| true => exact iteElimRepresentable_comp_bitLit_true d T E
| false => exact iteElimRepresentable_comp_bitLit_false d T E
```

### 5.3.307 Conditional elimination representable of the bit literal of true

**Statement.** For a natural number  $d$ , module morphisms  $T, E$ : the composite of the conditional elimination representable of  $d$  after the composite of `DayTensor.map (bitLitHom true) (additivePair T E)` after `DayTensor.leftUnitorInv dayTensorUnit` equals  $T$ .

**Proof.** This is an instance of the conditional elimination representable of the bit literal of the auxiliary.

#### Lean 4 source `QLambda/Linear/FragmentIteBeta.lean`

```
theorem iteElimRepresentable_bitLit_true (d : Nat)
  (T E : Hom dayTensorUnit (representable d)) :
  Hom.comp (iteElimRepresentable d)
    (Hom.comp
      (DayTensor.map (bitLitHom true) (additivePair T E))
      (DayTensor.leftUnitorInv dayTensorUnit)) =
  T :=
iteElimRepresentable_bitLit_aux d true T E
(iteElimRepresentable_comp_bitLit d true T E)
```

### 5.3.308 Conditional elimination representable of the bit literal of false

**Statement.** For a natural number  $d$ , module morphisms  $T, E$ : the composite of the conditional elimination representable of  $d$  after the composite of `DayTensor.map (bitLitHom false) (additivePair T E)` after `DayTensor.leftUnitorInv dayTensorUnit` equals  $E$ .

**Proof.** This is an instance of the conditional elimination representable of the bit literal of the auxiliary.

#### Lean 4 source `QLambda/Linear/FragmentIteBeta.lean`

```
theorem iteElimRepresentable_bitLit_false (d : Nat)
  (T E : Hom dayTensorUnit (representable d)) :
```

```

Hom.comp (iteElimRepresentable d)
  (Hom.comp
    (DayTensor.map (bitLitHom false) (additivePair T E))
    (DayTensor.leftUnitorInv dayTensorUnit)) =
  E :=
iteElimRepresentable_bitLit_aux d false T E
(iteElimRepresentable_comp_bitLit d false T E)

```

### 5.3.309 Transport an `ite` eliminator along a result isomorphism

**Definition.** Transport an `ite` eliminator along a result isomorphism.

**Construction.** Defined by an explicit formula built from the composition, the morphism, the conditional and the functorial action.

**Lean 4 source** [QLambda/Linear/FragmentIteBranching.lean](#)

```

noncomputable def iteElimCongr {Bit A A' : Module}
  (e : Iso A A')
  (ite : Hom (dayTensor Bit (additiveProduct A A)) A) :
  Hom (dayTensor Bit (additiveProduct A' A')) A' :=
Hom.comp e.hom
  (Hom.comp ite
    (DayTensor.map (Hom.id Bit)
      (additivePair
        (Hom.comp e.inv (additiveFst A' A'))
        (Hom.comp e.inv (additiveSnd A' A')))))

```

### 5.3.310 Lift an eliminator on `N` to one on `[X, N]` via Day closedness

**Definition.** Lift an eliminator on `N` to one on `[X, N]` via Day closedness.

**Construction.** Defined by an explicit formula built from the Day internal morphism, the pair evaluation, the module morphism and the Day tensor product.

**Lean 4 source** [QLambda/Linear/FragmentIteBranching.lean](#)

```

noncomputable def iteElimInternalHom {X N : Module}
  (iteN :
    Hom (dayTensor (representable 2) (additiveProduct N N)) N) :
  Hom
    (dayTensor (representable 2)
      (additiveProduct (dayInternalHom X N) (dayInternalHom X N)))
    (dayInternalHom X N) :=
let P := dayInternalHom X N
let pairEval :
  Hom (dayTensor (additiveProduct P P) X) (additiveProduct N N) :=
additivePair
  (Hom.comp (FragmentContext.dayEval X N)
    (DayTensor.map (additiveFst P P) (Hom.id X)))
  (Hom.comp (FragmentContext.dayEval X N)
    (DayTensor.map (additiveSnd P P) (Hom.id X)))
let uncurried :
  Hom

```

```

      (dayTensor
        (dayTensor (representable 2) (additiveProduct P P)) X)
    N :=
    Hom.comp iteN
      (Hom.comp (DayTensor.map (Hom.id _) pairEval)
        (DayTensor.associator (representable 2) (additiveProduct P P) X))
    dayClosedPresentation.closed
      (dayTensor (representable 2) (additiveProduct P P)) X N uncurried

```

### 5.3.311 Definition of the transport along an equality conditional

**Definition.** The transport along an equality conditional of `ite` is a module morphism.

**Construction.** Constructed interactively; an equation between variables is used to substitute one for the other.

#### Lean 4 source `QLambda/Linear/FragmentIteBranching.lean`

```

private noncomputable def castIte {Bit A B : Module}
  (hA : A = B)
  (ite : Hom (dayTensor Bit (additiveProduct A A)) A) :
  Hom (dayTensor Bit (additiveProduct B B)) B := by
  subst hA
  exact ite

```

### 5.3.312 Empty combined discard agrees with the closed collapse

**Statement.** Empty combined discard agrees with the closed collapse. Formally: `FragmentContext.combinedAllDiscard hΓ hΔ = FragmentContext.combinedClosedCollapse`.

**Proof.** The goal is simplified using the definition of the combined all discard and the definition of the combined closed term collapse.

#### Lean 4 source `QLambda/Linear/FragmentIteBranching.lean`

```

theorem combinedAllDiscard_nil (hGamma : CtxUAllBit []) (hDelta : AllNone []) :
  FragmentContext.combinedAllDiscard hGamma hDelta =
    FragmentContext.combinedClosedCollapse := by
  simp only [FragmentContext.combinedAllDiscard,
    FragmentContext.combinedClosedCollapse]
  -- On `[ ]`, both discard maps are identity by construction.
  have hu : FragmentContext.unrestrictedAllBitDiscard hGamma =
    Hom.id dayTensorUnit := rfl
  have hl : FragmentContext.linearAllNoneCollapse hDelta =
    Hom.id dayTensorUnit := rfl
  simp only [hu, hl]

```

### 5.3.313 Semantic-fragment membership of the first-order type

**Statement.** For a type `A`: if `A` lies in the semantic fragment; for every `B, C`, `A ≠ .arrow .lin B C`; and for every `C`, `A ≠ .arrow .unres .bit C`, then `A` is a first-order type.



**Proof.** By case analysis on the derivation that  $A$  lies in the semantic fragment. For a construction from a first-order type, the claim is one of the premises of the rule; for a function type linear and a function type unrestricted bit, the claim is checked directly. It follows from the hypothesis that for every  $B, C, A \neq \text{.arrow .lin } B \ C$  and the hypothesis that for every  $C, A \neq \text{.arrow .unres .bit } C$ .

#### Lean 4 source `QLambda/Linear/FragmentIteBranching.lean`

```
private theorem semanticFragment_firstOrder_of
  {A : Ty} (hA : Ty.SemanticFragment A)
  (h : forall {B C}, A != .arrow .lin B C)
  (h' : forall {C}, A != .arrow .unres .bit C) :
  Ty.FirstOrder A := by
cases hA with
| ofFirstOrder hFO => exact hFO
| arrowLin => exact (h rfl).elim
| arrowUnresBit => exact (h' rfl).elim
```

### 5.3.314 Recursively build conditional elimination by inspecting the result type

**Definition.** Recursively build `iteElim` by inspecting the result type.

**Construction.** Defined by cases on the input: `.unit`,  $hA \mapsto \text{by}; \text{.bit}$ ,  $hA \mapsto \text{by}; \text{.qubit}$ ,  $hA \mapsto \text{by}; \text{.tensor } A \ B$ ,  $hA \mapsto \text{by}; \text{.arrow .lin } A \ B$ ,  $hA \mapsto \text{by}; \text{arrowLin } h\text{Dom } \_ \mapsto$  the exact of the  $h$  dom; `ofFirstOrder hFO`  $\mapsto$  the cases of  $hFO$ ; `arrowLin`  $\_ \ h\text{Cod} \mapsto$  the exact of the  $h$  cod; and so on for the remaining cases.

#### Lean 4 source `QLambda/Linear/FragmentIteBranching.lean`

```
noncomputable def iteElimFragment : forall {A : Ty}, Ty.SemanticFragment A ->
  Hom
  (dayTensor (fragmentModule .bit)
    (additiveProduct (fragmentModule A) (fragmentModule A)))
  (fragmentModule A)
| .unit, hA => by
  have hFO : Ty.FirstOrder .unit := .unit
  simpa [fragmentModule_bit, fragmentModule_of_firstOrder hFO] using
    iteElimRepresentable hFO.dimension
| .bit, hA => by
  have hFO : Ty.FirstOrder .bit := .bit
  simpa [fragmentModule_bit, fragmentModule_of_firstOrder hFO] using
    iteElimRepresentable hFO.dimension
| .qubit, hA => by
  have hFO : Ty.FirstOrder .qubit := .qubit
  simpa [fragmentModule_bit, fragmentModule_of_firstOrder hFO] using
    iteElimRepresentable hFO.dimension
| .tensor A B, hA => by
  have hFO : Ty.FirstOrder (.tensor A B) :=
    semanticFragment_firstOrder_of hA (by intro _ _ h; cases h)
  (by intro _ h; cases h)
  simpa [fragmentModule_bit, fragmentModule_of_firstOrder hFO] using
    iteElimRepresentable hFO.dimension
| .arrow .lin A B, hA => by
  have hDom : Ty.FirstOrder A := by
    cases hA with
```

```

      | arrowLin hDom _ => exact hDom
      | ofFirstOrder hFO => cases hFO
have hCod : Ty.SemanticFragment B := by
  cases hA with
    | arrowLin _ hCod => exact hCod
    | ofFirstOrder hFO => cases hFO
let d : Nat := A.hilbertDim
have hd : hDom.dimension = d := rfl
let N := fragmentModule B
let iteN :
  Hom (dayTensor (representable 2) (additiveProduct N N)) N := by
  simpa [fragmentModule_bit] using iteElimFragment hCod
let iteDay :=
  iteElimInternalHom (X := representable d) (N := N) iteN
simpa [fragmentModule_bit, fragmentModule, hd] using
  iteElimCongr (dayInternalHomRepresentableIso d N) iteDay
| .arrow .unres .bit B, hA => by
  have hCod : Ty.SemanticFragment B := by
    cases hA with
      | arrowUnresBit hCod => exact hCod
      | ofFirstOrder hFO => cases hFO
  let N := fragmentModule B
  let iteN :
    Hom (dayTensor (representable 2) (additiveProduct N N)) N := by
    simpa [fragmentModule_bit] using iteElimFragment hCod
  simpa [fragmentModule_bit, fragmentModule] using
    iteElimInternalHom (X := classicalBitModule) (N := N) iteN
| .arrow .unres .unit C, hA =>
  (Ty.SemanticFragment.not_arrow_unres_unit C hA).elim
| .arrow .unres .qubit C, hA =>
  (Ty.SemanticFragment.not_arrow_unres_non_bit
    (by intro h; cases h) hA).elim
| .arrow .unres (.var n) C, hA =>
  (Ty.SemanticFragment.not_arrow_unres_non_bit
    (by intro h; cases h) hA).elim
| .arrow .unres (.tensor A B) C, hA =>
  (Ty.SemanticFragment.not_arrow_unres_non_bit
    (by intro h; cases h) hA).elim
| .arrow .unres (.arrow m A B) C, hA =>
  (Ty.SemanticFragment.not_arrow_unres_non_bit
    (by intro h; cases h) hA).elim
| .arrow .unres (.mu A) C, hA =>
  (Ty.SemanticFragment.not_arrow_unres_non_bit
    (by intro h; cases h) hA).elim
| .var n, hA => (Ty.SemanticFragment.not_var (n := n) hA).elim
| .mu A, hA => (Ty.SemanticFragment.not_mu (A := A) hA).elim

```

### 5.3.315 Compiling inhabitant of fragment branching

**Definition.** Compiling inhabitant of `FragmentBranching`.

**Construction.** Constructed by supplying each component: conditional elimination. The accompanying laws are verified from the definitions.

**Lean 4 source** `QLambda/Linear/FragmentIteBranching.lean`

```
noncomputable def routeAFragmentBranching : FragmentBranching where
  iteElim := fun {_A} hA => iteElimFragment hA
```

### 5.3.316 Full Route-A compositional denotation

**Definition.** Full Route-A compositional denotation.

**Construction.** Defined to be the denotation with of the route a fragment branching and  $c$ .

**Lean 4 source** [QLambda/Linear/FragmentIteBranching.lean](#)

```
noncomputable def FragCert.denote {Gamma Delta M A} (c : FragCert Gamma Delta M A) :
  Hom (FragmentContext.combined Gamma Delta) (fragmentModule A) :=
  FragCert.denoteWith routeAFragmentBranching c
```

### 5.3.317 Definition of the preparation bra

**Definition.** The preparation bra of  $i$  and  $\Phi$  is a superoperator from  $m * n$  to  $n$ .

**Construction.** Defined by an explicit formula built from the composition, the tensor left unitor, the tensor product and the complementary basis effect.

**Lean 4 source** [QLambda/Linear/FragmentItePrep.lean](#)

```
noncomputable def prepBra (i : Fin 2) {m n : Nat}
  (? : Superoperator m 2) : Superoperator (m * n) n :=
  Superoperator.comp (Superoperator.tensorLeftUnitor n)
    (Superoperator.tensor
      (Superoperator.comp (ChoiSum.complementaryBasisEffect i) ?)
      (Superoperator.identity n))
```

### 5.3.318 Preparation bra of zero

**Statement.** For natural numbers  $m, n$ , an index  $i$ : the preparation bra of  $i$  and the  $n$  of  $0$  equals  $0$ .

**Proof.** The key step rewrites with the definition of the preparation bra, the composition of zero for superoperators, in the right argument and the tensor product of zero for superoperators, in the left argument.

**Lean 4 source** [QLambda/Linear/FragmentItePrep.lean](#)

```
theorem prepBra_zero {m n : Nat} (i : Fin 2) :
  prepBra i (n := n) (0 : Superoperator m 2) = 0 := by
  simp only [prepBra]
  rw [Superoperator.comp_zero_right, Superoperator.tensor_zero_left,
    Superoperator.comp_zero_right]
```

### 5.3.319 Summability of the preparation bra

**Statement.** For natural numbers  $m, n$ , an index  $i$ , a superoperator  $\Phi$ : if the family  $\Phi_s$  sums to  $\Phi$ , then the family  $\text{fun } j \Rightarrow \text{prepBra } i \text{ (n := n) } (\Phi_s \ j)$  sums to  $\text{prepBra } i \text{ (n := n) } \Phi$ .

**Proof.** It follows from the fact that postcomposition by a fixed superoperator preserves every defined Choi sum.

#### Lean 4 source `QLambda/Linear/FragmentItePrep.lean`

```
theorem prepBra_hasSum {? : Type} [Countable ?] {m n : Nat}
  (i : Fin 2) {?s : ? -> Superoperator m 2} {? : Superoperator m 2}
  (h : ChoiSum.HasSum ?s ?) :
  ChoiSum.HasSum (fun j => prepBra i (n := n) (?s j))
    (prepBra i (n := n) ?) := by
  have hcomp := ChoiSum.comp_left (ChoiSum.complementaryBasisEffect i) h
  have hten := ChoiSum.tensor_hasSum_left hcomp (Superoperator.identity n)
  exact ChoiSum.comp_left (Superoperator.tensorLeftUnitor n) hten
```

### 5.3.320 Preparation bra of a sum of the underlying completely positive map

**Statement.** For natural numbers  $m, n$ , a superoperator  $\Phi$ : the sum of  $(\text{prepBra } 0 \ (n := n) \ \Phi).cp$  and  $(\text{prepBra } 1 \ (n := n) \ \Phi).cp$  equals an explicit expression in the composition, the tensor left unitor, the tensor product and the discard two.

**Proof.** The key step rewrites with the definition of the preparation bra, the underlying completely positive map of a composite for superoperators, the underlying completely positive map of a tensor product for superoperators and the fact that tensor is additive in its first CP-map argument.

#### Lean 4 source `QLambda/Linear/FragmentItePrep.lean`

```
theorem prepBra_add_cp {m n : Nat} (? : Superoperator m 2) :
  (prepBra 0 (n := n) ?).cp + (prepBra 1 (n := n) ?).cp =
    (Superoperator.comp (Superoperator.tensorLeftUnitor n)
      (Superoperator.tensor
        (Superoperator.comp ChoiSum.discardTwo ?)
        (Superoperator.identity n)))
    ).cp := by
  simp only [prepBra, Superoperator.cp_comp]
  have hdistrib :=
    CPMMap.comp_add_left (Superoperator.tensorLeftUnitor n).cp
      (Superoperator.tensor
        (Superoperator.comp ChoiSum.e0 ?)
        (Superoperator.identity n)).cp
      (Superoperator.tensor
        (Superoperator.comp ChoiSum.e1 ?)
        (Superoperator.identity n)).cp
  change
    CPMMap.comp (Superoperator.tensorLeftUnitor n).cp
      (Superoperator.tensor
        (Superoperator.comp ChoiSum.e0 ?)
        (Superoperator.identity n)).cp +
      CPMMap.comp (Superoperator.tensorLeftUnitor n).cp
        (Superoperator.tensor
          (Superoperator.comp ChoiSum.e1 ?)
          (Superoperator.identity n)).cp =
    -
  rw [ <- hdistrib ]
  congr 1
  simp only [Superoperator.cp_tensor, Superoperator.cp_comp]
  rw [ <- CPMMap.tensor_add_left, <- CPMMap.comp_add_right,
```

ChoiSum.e0\_add\_e1\_cp\_eq\_discardTwo]

### 5.3.321 Preparation bra of a finite sum of the trace non-increasing

**Statement.** For natural numbers  $m, n$ , a superoperator  $\Phi$ : `TraceNonincreasing`  $((\text{prepBra } 0 \ (n := n) \ \Phi).cp + (\text{prepBra } 1 \ (n := n) \ \Phi).cp)$ .

**Proof.** The key step rewrites with the preparation bra of a sum of the underlying completely positive map and the definition of the composition.

#### Lean 4 source `QLambda/Linear/FragmentItePrep.lean`

```
theorem prepBra_sum_tni {m n : Nat} (? : Superoperator m 2) :
  TraceNonincreasing
    ((prepBra 0 (n := n) ?).cp + (prepBra 1 (n := n) ?).cp) := by
  rw [prepBra_add_cp]
  exact (Superoperator.comp (Superoperator.tensorLeftUnitor n)
    (Superoperator.tensor
      (Superoperator.comp ChoiSum.discardTwo ?)
      (Superoperator.identity n))).trace_nonincreasing
```

### 5.3.322 Naturality of the preparation bra

**Statement.** For an index  $i$ , natural numbers  $m', m, n', n$ , superoperators  $\Phi, f, g$ : the composite of the preparation bra of  $i, n := n, \Phi$  after the tensor product of  $f$  and  $g$  equals the composite of  $g$  after the preparation bra of  $i, n := n', \text{Superoperator.comp } \Phi \ f$ .

**Proof.** The key step rewrites with the definition of the preparation bra, the fact that composition for superoperators is associative, the identity of a composite for superoperators and the composition of the identity for superoperators.

#### Lean 4 source `QLambda/Linear/FragmentItePrep.lean`

```
theorem prepBra_naturality (i : Fin 2) {m' m n' n : Nat}
  (? : Superoperator m 2) (f : Superoperator m' m)
  (g : Superoperator n' n) :
  Superoperator.comp (prepBra i (n := n) ?) (Superoperator.tensor f g) =
    Superoperator.comp g
      (prepBra i (n := n') (Superoperator.comp ? f)) := by
  simp only [prepBra]
  have hten :
    Superoperator.comp
      (Superoperator.tensor
        (Superoperator.comp (ChoiSum.complementaryBasisEffect i) ?)
        (Superoperator.identity n))
      (Superoperator.tensor f g) =
    Superoperator.tensor
      (Superoperator.comp
        (Superoperator.comp (ChoiSum.complementaryBasisEffect i) ?) f)
      (Superoperator.comp (Superoperator.identity n) g) :=
    (Superoperator.tensor_comp _ _ _).symm
  have hlhs :
    Superoperator.comp
```

```

(Superoperator.comp (Superoperator.tensorLeftUnitor n)
  (Superoperator.tensor
    (Superoperator.comp (ChoiSum.complementaryBasisEffect i) ?)
    (Superoperator.identity n)))
(Superoperator.tensor f g) =
Superoperator.comp (Superoperator.tensorLeftUnitor n)
  (Superoperator.tensor
    (Superoperator.comp (ChoiSum.complementaryBasisEffect i)
      (Superoperator.comp ? f))
    g) := by
rw [ <- Superoperator.comp_assoc, hten]
simp only [Superoperator.identity_comp, Superoperator.comp_assoc]
have hfactor :
  Superoperator.tensor
    (Superoperator.comp (ChoiSum.complementaryBasisEffect i)
      (Superoperator.comp ? f))
  g =
  Superoperator.comp
    (Superoperator.tensor (Superoperator.identity 1) g)
    (Superoperator.tensor
      (Superoperator.comp (ChoiSum.complementaryBasisEffect i)
        (Superoperator.comp ? f))
      (Superoperator.identity n')) := by
have h :=
  Superoperator.tensor_comp
    (Superoperator.identity 1)
    (Superoperator.comp (ChoiSum.complementaryBasisEffect i)
      (Superoperator.comp ? f))
  g (Superoperator.identity n')
simp only [Superoperator.identity_comp, Superoperator.comp_identity] at h
exact h
rw [hlhs, hfactor, Superoperator.comp_assoc,
  Superoperator.tensorLeftUnitor_naturality g]
simp only [Superoperator.comp_assoc]

```

### 5.3.323 Matching preparation: preparation bra of $i$ is the left unitor $1 \otimes n \rightarrow n$

**Statement.** Matching preparation:  $\text{prepBra } i \circ |i\rangle$  is the left unitor  $1 \otimes n \rightarrow n$ . Formally:  $\text{prepBra } i \ (n := n) \ (\text{ChoiSum.isometricBasisPrep } i) = \text{Superoperator.tensorLeftUnitor } n$ .

**Proof.** The goal is simplified using the definition of the preparation bra, the complementary basis effect of a composite of the isometric basis preparation for countable Choi sums, the tensor product of an identity and the composition of the identity for superoperators.

**Lean 4 source** [QLambda/Linear/FragmentItePrep.lean](#)

```

theorem prepBra_isometricBasisPrep (i : Fin 2) {n : Nat} :
  prepBra i (n := n) (ChoiSum.isometricBasisPrep i) =
    Superoperator.tensorLeftUnitor n := by
  simp only [prepBra, ChoiSum.complementaryBasisEffect_comp_isometricBasisPrep,
    Superoperator.tensor_identity, Superoperator.comp_identity]

```

### 5.3.324 Cross preparation: preparation bra of $i$ when $i \neq j$

**Statement.** Cross preparation:  $\text{prepBra } i \circ |j\rangle = 0$  when  $i \neq j$ . Formally:  $\text{prepBra } i \ (n := n) \ (\text{ChoiSum.isometricBasisPrep } j) = 0$ .

**Proof.** The goal is simplified using the definition of the preparation bra, the complementary basis effect of a composite of the isometric basis preparation for countable Choi sums, assuming  $\text{ne}$ , the tensor product of zero for superoperators, in the left argument and the composition of zero for superoperators, in the right argument.

**Lean 4 source** [QLambda/Linear/FragmentItePrep.lean](#)

```
theorem prepBra_isometricBasisPrep_of_ne {i j : Fin 2} (h : i != j) {n : Nat} :
  prepBra i (n := n) (ChoiSum.isometricBasisPrep j) = 0 := by
  simp only [prepBra,
    ChoiSum.complementaryBasisEffect_comp_isometricBasisPrep_of_ne h,
    Superoperator.tensor_zero_left, Superoperator.comp_zero_right]
```

### 5.3.325 Boolean literal index: true of 1, false of 0

**Definition.** Boolean literal index:  $\text{true} \mapsto 1, \text{false} \mapsto 0$ .

**Construction.** Defined to be  $\text{if } b \text{ then } 1 \text{ else } 0$ .

**Lean 4 source** [QLambda/Linear/FragmentItePrep.lean](#)

```
def bitFin (b : Bool) : Fin 2 := if b then 1 else 0
```

### 5.3.326 Formula for the bit prepare

**Statement.** For a bit  $b$ : the bit prepare of  $b$  equals the isometric basis preparation of the bit finite index of  $b$ .

**Proof.** By case analysis on the bit  $b$ .

**Lean 4 source** [QLambda/Linear/FragmentItePrep.lean](#)

```
theorem bitPrepare_eq (b : Bool) :
  bitPrepare b = ChoiSum.isometricBasisPrep (bitFin b) := by
  cases b <;> rfl
```

### 5.3.327 Definition of the pair carrier

**Definition.** The pair carrier of  $d$  and  $n$  is introduced by the definition below.

**Construction.** Defined to be  $\text{Superoperator } n \ d \times \text{Superoperator } n \ d$ .

**Lean 4 source** [QLambda/Linear/FragmentItePrep.lean](#)

```
private abbrev PairCarrier (d n : Nat) :=
  Superoperator n d x Superoperator n d
```

### 5.3.328 Then-branch uses outcome 1 (true); else-branch uses 0 (false)

**Statement.** Then-branch uses outcome 1 (true); else-branch uses 0 (false).

**Proof.** The key step rewrites with the action on a matrix of a sum of a mapped family, standard identities for matrices, standard identities for complex numbers and the underlying completely positive map of a composite for superoperators.

#### Lean 4 source `QLambda/Linear/FragmentItePrep.lean`

```
theorem iteBranches_addable {m n d : Nat}
  (? : Superoperator m 2) (pair : PairCarrier d n) :
  TraceNonincreasing
    ((Superoperator.comp pair.1 (prepBra 1 (n := n) ?)).cp +
     (Superoperator.comp pair.2 (prepBra 0 (n := n) ?)).cp) := by
  intro ? h?
  have hpos1 : ((prepBra 1 (n := n) ?).cp.applyMat ?).PosSemidef :=
    CPMMap.applyMat_posSemidef _ h?
  have hpos0 : ((prepBra 0 (n := n) ?).cp.applyMat ?).PosSemidef :=
    CPMMap.applyMat_posSemidef _ h?
  rw [CPMap.applyMat_add_map, Matrix.trace_add, Complex.add_re]
  have h1 :
    (Matrix.trace
      (CPMap.applyMat
        (Superoperator.comp pair.1 (prepBra 1 (n := n) ?)).cp ?)).re <=
      (Matrix.trace
        (CPMap.applyMat (prepBra 1 (n := n) ?).cp ?)).re := by
    simp only [Superoperator.cp_comp, CPMMap.applyMat_comp]
    exact pair.1.trace_nonincreasing _ hpos1
  have h0 :
    (Matrix.trace
      (CPMap.applyMat
        (Superoperator.comp pair.2 (prepBra 0 (n := n) ?)).cp ?)).re <=
      (Matrix.trace
        (CPMap.applyMat (prepBra 0 (n := n) ?).cp ?)).re := by
    simp only [Superoperator.cp_comp, CPMMap.applyMat_comp]
    exact pair.2.trace_nonincreasing _ hpos0
  refine (add_le_add h1 h0).trans ?_
  have hbras :
    (Matrix.trace (CPMap.applyMat (prepBra 1 (n := n) ?).cp ?)).re +
    (Matrix.trace (CPMap.applyMat (prepBra 0 (n := n) ?).cp ?)).re =
    (Matrix.trace
      (CPMap.applyMat
        ((prepBra 0 (n := n) ?).cp +
         (prepBra 1 (n := n) ?).cp) ?)).re := by
    rw [CPMap.applyMat_add_map, Matrix.trace_add, Complex.add_re, add_comm]
  rw [hbras]
  exact prepBra_sum_tni ? ? h?
```

### 5.3.329 Definition of the conditional representable bilinear map

**Definition.** The conditional representable bilinear map of  $d$  is a bilinear map.

**Construction.** Constructed by supplying each component: application, functorial action zero left, functorial action zero right, functorial action sum left, functorial action sum right and naturality. The accompanying laws are verified from the definitions.



## Lean 4 source QLambda/Linear/FragmentItePrep.lean

```
noncomputable def iteRepresentableBilinear (d : Nat) :
  Bilinear (representable 2)
    (additiveProduct (representable d) (representable d))
    (representable d) where
app := fun {m n} ? pair =>
  let p : PairCarrier d n := pair
  <(Superoperator.comp p.1 (prepBra 1 (n := n) ?)).cp +
    (Superoperator.comp p.2 (prepBra 0 (n := n) ?)).cp,
    iteBranches_addable ? p>
map_zero_left := by
  intro m n pair
  let p : PairCarrier d n := pair
  apply Superoperator.ext
  change
    (Superoperator.comp p.1 (prepBra 1 (n := n) (0 : Superoperator m 2))).cp +
      (Superoperator.comp p.2 (prepBra 0 (n := n) (0 : Superoperator m 2))).cp =
        (0 : Superoperator (m * n) d).cp
  rw [prepBra_zero, prepBra_zero, Superoperator.comp_zero_right,
      Superoperator.comp_zero_right, Superoperator.cp_zero, add_zero]
map_zero_right := by
  intro m n ?
  apply Superoperator.ext
  change
    (Superoperator.comp (0 : Superoperator n d) (prepBra 1 (n := n) ?)).cp +
      (Superoperator.comp (0 : Superoperator n d) (prepBra 0 (n := n) ?)).cp =
        (0 : Superoperator (m * n) d).cp
  rw [Superoperator.comp_zero_left, Superoperator.comp_zero_left,
      Superoperator.cp_zero, add_zero]
map_sum_left := by
  intro ? _ m n ?s ? pair h?
  let p : PairCarrier d n := pair
  change _root_.HasSum
  (fun i =>
    ((Superoperator.comp p.1 (prepBra 1 (n := n) (?s i))).cp +
      (Superoperator.comp p.2 (prepBra 0 (n := n) (?s i))).cp).choi
    ((Superoperator.comp p.1 (prepBra 1 (n := n) ?)).cp +
      (Superoperator.comp p.2 (prepBra 0 (n := n) ?)).cp).choi
  simp only [CPMap.choi_add]
  exact (ChoiSum.comp_left p.1 (prepBra_hasSum 1 h?)).add
    (ChoiSum.comp_left p.2 (prepBra_hasSum 0 h?))
map_sum_right := by
  intro ? _ m n ? pairs pairSum hpair
  have hp1 : ChoiSum.HasSum (fun i => (pairs i : PairCarrier d n).1)
    (pairSum : PairCarrier d n).1 := hpair.1
  have hp2 : ChoiSum.HasSum (fun i => (pairs i : PairCarrier d n).2)
    (pairSum : PairCarrier d n).2 := hpair.2
  change _root_.HasSum
  (fun i =>
    ((Superoperator.comp (pairs i : PairCarrier d n).1
      (prepBra 1 (n := n) ?)).cp +
      (Superoperator.comp (pairs i : PairCarrier d n).2
      (prepBra 0 (n := n) ?)).cp).choi
    ((Superoperator.comp (pairSum : PairCarrier d n).1
      (prepBra 1 (n := n) ?)).cp +
```

```

      (Superoperator.comp (pairSum : PairCarrier d n).2
        (prepBra 0 (n := n) ?)).cp).choi
    simp only [CPMap.choi_add]
    exact (ChoiSum.comp_right (prepBra 1 (n := n) ?) hp1).add
      (ChoiSum.comp_right (prepBra 0 (n := n) ?) hp2)
  naturality := by
    intro m' m n' n ? pair f g
    let p : PairCarrier d n := pair
    apply Superoperator.ext
    have hbranch (i : Fin 2) :
      (psi : Superoperator n d) :
        Superoperator.comp (Superoperator.comp psi g)
          (prepBra i (n := n') (Superoperator.comp ? f)) =
          Superoperator.comp
            (Superoperator.comp psi (prepBra i (n := n) ?))
            (Superoperator.tensor f g) := by
    have h := prepBra_naturality i ? f g
    calc
      Superoperator.comp (Superoperator.comp psi g)
        (prepBra i (n := n') (Superoperator.comp ? f)) =
        Superoperator.comp psi
          (Superoperator.comp g
            (prepBra i (n := n') (Superoperator.comp ? f))) := by
        rw [Superoperator.comp_assoc]
      _ = Superoperator.comp psi
        (Superoperator.comp (prepBra i (n := n) ?)
          (Superoperator.tensor f g)) := by rw [ <- h]
      _ = Superoperator.comp
        (Superoperator.comp psi (prepBra i (n := n) ?))
        (Superoperator.tensor f g) := by
        rw [ <- Superoperator.comp_assoc]
    have h1 := congrArg Superoperator.cp (hbranch 1 p.1)
    have h0 := congrArg Superoperator.cp (hbranch 0 p.2)
    have hrhs :
      (Superoperator.comp
        <(Superoperator.comp p.1 (prepBra 1 (n := n) ?)).cp +
          (Superoperator.comp p.2 (prepBra 0 (n := n) ?)).cp,
        iteBranches_addable ? p>
        (Superoperator.tensor f g)).cp =
      (Superoperator.comp
        (Superoperator.comp p.1 (prepBra 1 (n := n) ?))
        (Superoperator.tensor f g)).cp +
      (Superoperator.comp
        (Superoperator.comp p.2 (prepBra 0 (n := n) ?))
        (Superoperator.tensor f g)).cp := by
    simp only [Superoperator.cp_comp, CPMap.comp_add_right]
  -- Unfold app action on the left
  change
    (Superoperator.comp (Superoperator.comp p.1 g)
      (prepBra 1 (n := n') (Superoperator.comp ? f))).cp +
    (Superoperator.comp (Superoperator.comp p.2 g)
      (prepBra 0 (n := n') (Superoperator.comp ? f))).cp =
    (Superoperator.comp
      <(Superoperator.comp p.1 (prepBra 1 (n := n) ?)).cp +
        (Superoperator.comp p.2 (prepBra 0 (n := n) ?)).cp,
      iteBranches_addable ? p>

```

```

(Superoperator.tensor f g)).cp
rw [hrhs, h1, h0]

```

### 5.3.330 Definition of the conditional elimination representable

**Definition.** The conditional elimination representable of  $d$  is a module morphism.

**Construction.** Defined to be the lift of the conditional representable bilinear map of  $d$ .

#### Lean 4 source `QLambda/Linear/FragmentItePrep.lean`

```

noncomputable def iteElimRepresentable (d : Nat) :
  Hom
    (dayTensor (representable 2)
      (additiveProduct (representable d) (representable d)))
    (representable d) :=
  DayCoend.lift (iteRepresentableBilinear d)

```

### 5.3.331 Register-history identification

**Definition.** Register-history identification: closed measured `new0` program under `UsesAtMostQubits N`, with denotational `measureElim` spine and  $|0\rangle$  Born masses matching `Instrument/CompletedCP` packaging.

**Construction.** An element consists of `measured_cert` and `denote_measured`, subject to the laws `uses_measured`, `measure_branch_yoneda`, `born_ketZero_false`, `born_ketZero_true` and `born_ketZero_instrument`.

#### Lean 4 source `QLambda/Linear/FragmentMeasuredSimulation.lean`

```

structure FragmentMeasuredSimulation (N : Nat)
  extends FragmentWeightedSimulation N where
  /-- Closed certificate for the measured allocation program. -/
  measured_cert : FragCert.Closed measureNew0Program .qubit
  /-- The measured program is N-bounded when allocation is admitted. -/
  uses_measured : 1 <= N -> UsesAtMostQubits N measureNew0Program
  /-- Denotation expands as `measureElim comp map(denote Q, denote K) comp split`. -/
  denote_measured :
    FragCert.denote measured_cert =
      Hom.comp (FragCert.measureElim _)
        (Hom.comp
          (DayTensor.map
            (FragCert.denote fragCert_app_new0_unit)
            (FragCert.denote fragCert_measure_new0_cont))
          (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil))
  /-- Denotational measurement branches agree with Yoneda. -/
  measure_branch_yoneda :
    forall b, routeAFragmentModel.measureBranch b = measureBranchYoneda b
  /-- Runtime Born masses on the prepared `|0>` register. -/
  born_ketZero_false :
    1 <= N ->
      Runtime.RegisterState.measureProbability registerKetZero (0 : Fin 1)
      false = 1

```

```

born_ketZero_true :
  1 <= N ->
    Runtime.RegisterState.measureProbability registerKetZero (0 : Fin 1)
      true = 0
/-- Those Born masses equal Instrument branch traces. -/
born_ketZero_instrument :
  forall b, 1 <= N ->
    Runtime.RegisterState.measureProbability registerKetZero (0 : Fin 1) b =
      (Matrix.trace
        (((Instrument.measure (0 : Fin 1)).branchSuperoperator
          (if b then (1 : Fin 2) else 0)).cp.applyMat
            registerKetZero.mat)).re

```

### 5.3.332 Every N supplies a measured register-history simulation package

**Definition.** Every N supplies a measured register-history simulation package.

**Construction.** Constructed by supplying each component: passage to weighted fragment simulation, measured certificate, uses measured, denotation measured, measurement branch Yoneda, Born ket zero false, Born ket zero true and Born ket zero quantum instrument. The accompanying laws are verified from the definitions.

#### Lean 4 source `QLambda/Linear/FragmentMeasuredSimulation.lean`

```

noncomputable def fragmentMeasuredSimulation (N : Nat) :
  FragmentMeasuredSimulation N where
  toFragmentWeightedSimulation := fragmentWeightedSimulation N
  measured_cert := closed_measure_new0_cert
  uses_measured := fun hN =>
    UsesAtMostQubits.mono hN usesAtMost_measure_new0_cont
  denote_measured := denote_closed_measure_new0
  measure_branch_yoneda := fragment_measStep_denote_sound_branch
  born_ketZero_false := fun _ => measureProbability_registerKetZero_false
  born_ketZero_true := fun _ => measureProbability_registerKetZero_true
  born_ketZero_instrument := fun b _ =>
    measureProbability_eq_instrument_branch_trace registerKetZero b

```

### 5.3.333 Definition of the n-qubit OpenQASM header

**Definition.** The n-qubit OpenQASM header is an element of `Version`.

**Construction.** Defined to be the open QASM 3 0 ibm composer 2026 09.

#### Lean 4 source `QLambda/Linear/FragmentNDenotation.lean`

```

abbrev nQubitOpenQASMVersion : Version :=
  .openQASM3_0_ibmComposer_2026_09

```

### 5.3.334 Definition of the command viewed as a program

**Definition.** The command viewed as a program of C is the OpenQASM program.

**Construction.** Constructed by supplying each component: `body`. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Linear/FragmentNDenotation.lean](#)

```
def commandAsProgram {q c : Nat} (C : Command q c) :
  Program nQubitOpenQASMVersion q c where
  body := C.compile
```

### 5.3.335 Well-formedness of the command viewed as a program

**Statement.** For natural numbers  $q, c$ , a circuit command  $C$ : if  $C$  is well formed, then `commandAsProgram C` is well formed.

**Proof.** It follows from the well-formedness of the compilation.

**Lean 4 source** [QLambda/Linear/FragmentNDenotation.lean](#)

```
theorem commandAsProgram_wellFormed {q c : Nat} {C : Command q c}
  (hC : C.WellFormed) :
  (commandAsProgram C).WellFormed := by
  change Composer.Block.WellFormedAt 0 C.compile
  exact Command.compile_wellFormed hC
```

### 5.3.336 Definition of the OpenQASM rendering of a command

**Definition.** The OpenQASM rendering of a command of  $C$  is an element of `String`.

**Construction.** Defined to be the OpenQASM rendering of the command viewed as a program of  $C$  and the circuit command as program well formed of  $hC$ .

**Lean 4 source** [QLambda/Linear/FragmentNDenotation.lean](#)

```
def commandToOpenQASM {q c : Nat} (C : Command q c) (hC : C.WellFormed) :
  String :=
  Program.toOpenQASM (commandAsProgram C) (commandAsProgram_wellFormed hC)
```

### 5.3.337 OpenQASM rendering of the successful elaboration of the circuit command

**Statement.** For natural numbers  $q, c, \text{fuel}$ , a term  $M$ : if `Elaborates fuel M P`, then `P.command` is well formed and `commandAsProgram P.command` is well formed.

**Proof.** The witness is assembled directly from its components, using the generated command satisfies target static well-formedness.

**Lean 4 source** [QLambda/Linear/FragmentNDenotation.lean](#)

```
theorem elaborates_command_openqasm {q c fuel : Nat} {M : Term}
  {P : Compilation q c M} (h : Elaborates fuel M P) :
  P.command.WellFormed /\ (commandAsProgram P.command).WellFormed :=
  <elaborates_command_wellFormed h,
  commandAsProgram_wellFormed (elaborates_command_wellFormed h)>
```

### 5.3.338 Denotation of the fragment certificate of the closed term of the has

**Statement.** For a term  $M$ , a type  $A$ : if  $A$  lies in the semantic fragment, then the module morphism of the combined of  $[]$  and the fragment module of  $A$  is inhabited.

**Proof.** The witness is assembled directly from its components, using the definition of the denotation.

#### Lean 4 source `QLambda/Linear/FragmentNDenotation.lean`

```
theorem fragCert_closed_has_denotation {M : Term} {A : Ty}
  (c : FragCert.Closed M A) (_hA : Ty.SemanticFragment A) :
  Nonempty
    (Hom (FragmentContext.combined [] []) (fragmentModule A)) :=
  <FragCert.denote c>
```

### 5.3.339 The N-qubit fragment denotation OpenQASM rendering interface

**Statement.** For a natural number  $N$ : the statement asserts 5 properties of the objects involved; the precise formulation is the Lean statement below.

**Proof.** The witness is assembled directly from its components.

#### Lean 4 source `QLambda/Linear/FragmentNDenotation.lean`

```
theorem n_qubit_fragment_denotation_openqasm_interface (N : Nat) :
  (forall {M : Term} {A : Ty} (_c : FragCert.Closed M A),
    Ty.SemanticFragment A ->
      Nonempty
        (Hom (FragmentContext.combined [] []) (fragmentModule A))) /\
  UsesAtMostQubits N .unit /\
  (forall {q c fuel : Nat} {M : Term} {P : Compilation q c M},
    Elaborates fuel M P -> P.command.WellFormed) /\
  (forall {q c : Nat} (C : Command q c) (_hC : C.WellFormed),
    commandToOpenQASM C _hC = (commandAsProgram C).renderOpenQASM) /\
  (forall (C : Command 1 1) (_hC : C.Quotable),
    Nonempty (FragCert.Closed C.quote Command.quotationTy)) :=
  <fun c hA => fragCert_closed_has_denotation c hA,
    usesAtMost_unit N,
    fun {_q} {_c} {_fuel} {_M} {_P} h => elaborates_command_wellFormed h,
    fun {_q} {_c} _C _hC => rfl,
    fun _C hC => fragment_quote_has_fragCert hC>
```

### 5.3.340 The successful elaboration of the quotation of the packaging equals the circuit command of the denotation

**Statement.** For a circuit command  $C$ : if  $C$  is quotable, then the interpretation of a quoted morphism of `model`,  $hC$ ,  $c$  equals the denotation of `model`.

**Proof.** By definition. Unfolding the interpretation of a quoted morphism turns the left-hand side, the interpretation of a quoted morphism of `model`,  $hC$ ,  $c$ , into the right-hand side, the denotation of `model`; the two sides are the same term.

#### Lean 4 source `QLambda/Linear/FragmentNDenotation.lean`

```

theorem elaborates_quote_packaging_eq_command_denote
  {C : Command 1 1} (hC : C.Quotable) (model : Composer.Model 1 1)
  (c : FragCert.Closed C.quote Command.quotationTy) :
  interpretQuoteHom model hC c = C.denote model :=
  rfl

```

### 5.3.341 Successful elaboration of the classical–quantum of the compilation of the transport

**Statement.** For natural numbers  $q, c, \text{fuel}$ , a term  $M$ : if `Elaborates fuel M P`, then `Eq (denote Block model P.command.compile) (P.command.denote model)`.

**Proof.** This is an instance of the existing target APIs identify staged-command semantics with the semantics of its structurally compiled Composer block, applied to the hypothesis that `Elaborates fuel M P`.

#### Lean 4 source `QLambda/Linear/FragmentNDenotation.lean`

```

theorem elaborates_cq_compile_transport {q c fuel : Nat} {M : Term}
  {P : Compilation q c M} (h : Elaborates fuel M P)
  (model : Composer.Model q c) :
  CQ.Eq (Composer.denoteBlock model P.command.compile)
  (P.command.denote model) :=
  elaborates_compile_agreement h model

```

### 5.3.342 The elaboration transport skip quotation

**Statement.** The denotation of  $c$  equals an explicit expression in the quoted skip spine, the interpretation of a quoted spine, the fragment certificate skip quotation denotation independent and the denotation.

**Proof.** The witness is assembled directly from its components, using the fragment certificate of the skip of the quotation of the denotation of the independent.

#### Lean 4 source `QLambda/Linear/FragmentNDenotation.lean`

```

theorem elab_transport_skip_quote (model : Composer.Model 1 1)
  (c : FragCert.Closed Command.skip.quote Command.quotationTy) :
  FragCert.denote c = quoteSkipSpine /\
  interpretQuoteSpine model
  (.skip (fragCert_skip_quote_denote_independent c)) =
  Command.skip.denote model :=
  <fragCert_skip_quote_denote_independent c,
  interpret_skip_quote_of_closed model c>

```

### 5.3.343 The elaboration transport measurement quotation

**Statement.** For indexes  $q\text{bit}, c\text{bit}$ : the denotation of the fragment certificate measurement quotation of  $q\text{bit}$  and  $c\text{bit}$  equals an explicit expression in the quotation measurement spine, the interpretation quotation spine extensionality, the fragment certificate measurement quotation denotation and the measurement.

**Proof.** The witness is assembled directly from its components, using the denotation of the fragment certificate of the measurement of the quotation.

#### Lean 4 source `QLambda/Linear/FragmentNDenotation.lean`

```
theorem elab_transport_measure_quote (model : Composer.Model 1 1)
  (qbit cbit : Fin 1) :
  FragCert.denote (fragCert_measure_quote qbit cbit) = quoteMeasureSpine /\
  interpretQuoteSpineExt model
  (.measure (fragCert_measure_quote_denote qbit cbit)) =
  (Command.measure qbit cbit).denote model :=
<fragCert_measure_quote_denote qbit cbit,
  (interpret_measure_quote model qbit cbit
    (fragCert_measure_quote qbit cbit)
    (fragCert_measure_quote_denote qbit cbit)).2>
```

#### 5.3.344 Definition of the $w_0$

**Definition.** The  $w_0$  is an index.

**Construction.** Constructed by supplying each component of the structure explicitly.

#### Lean 4 source `QLambda/Linear/FragmentNDenotation.lean`

```
private def w0 : Fin 1 := <0, by decide>
```

#### 5.3.345 Definition of the Boolean 0

**Definition.** The Boolean 0 is an index.

**Construction.** Constructed by supplying each component of the structure explicitly.

#### Lean 4 source `QLambda/Linear/FragmentNDenotation.lean`

```
private def b0 : Fin 1 := <0, by decide>
```

#### 5.3.346 The measured control elaborates to OpenQASM rendering

**Statement.** `elaborateCommand (q := 1) (c := 1) 12 measuredControlProgram` equals the present value the expected result of the measured control.

**Proof.** This is an instance of the measured control elaboration test.

#### Lean 4 source `QLambda/Linear/FragmentNDenotation.lean`

```
theorem measured_control_elaborates_openqasm :
  elaborateCommand (q := 1) (c := 1) 12 measuredControlProgram =
  some measuredControlExpected :=
  measured_control_elaboration_test
```

#### 5.3.347 The Bell-state program elaborates to OpenQASM rendering

**Statement.** `elaborateCommand (q := 2) (c := 0) 10 bellProgram` equals the present value the expected result of the Bell-state program.

**Proof.** This is an instance of the worked check of the Bell-state program of the elaboration.



#### Lean 4 source `QLambda/Linear/FragmentNDenotation.lean`

```
theorem bell_elaborates_opengasm :  
  elaborateCommand (q := 2) (c := 0) 10 bellProgram = some bellExpected :=  
  bell_elaboration_test
```

### 5.3.348 OpenQASM rendering of the measurement of the circuit command

**Statement.** An explicit expression in the measurement and the OpenQASM rendering of a command equals  $(\text{commandAsProgram } (\text{Command.measure } w0 \ b0)).\text{renderOpenQASM}$ .

**Proof.** The witness is assembled directly from its components.

#### Lean 4 source `QLambda/Linear/FragmentNDenotation.lean`

```
theorem measure_command_opengasm :  
  (Command.measure w0 b0).WellFormed /\  
  commandToOpenQASM (Command.measure w0 b0) .measure =  
  (commandAsProgram (Command.measure w0 b0)).renderOpenQASM :=  
  <.measure, rfl>
```

### 5.3.349 The measurement quotation classical–quantum bridge

**Statement.** The denotation of the fragment certificate measurement quotation of  $w0$  and  $b0$  equals an explicit expression in the quotation measurement spine, the interpretation quotation spine extensionality, the fragment certificate measurement quotation denotation and the measurement.

**Proof.** This is an instance of the elaboration transport measurement quotation.

#### Lean 4 source `QLambda/Linear/FragmentNDenotation.lean`

```
theorem measure_quote_cq_bridge (model : Composer.Model 1 1) :  
  FragCert.denote (fragCert_measure_quote w0 b0) = quoteMeasureSpine /\  
  interpretQuoteSpineExt model  
  (.measure (fragCert_measure_quote_denote w0 b0)) =  
  (Command.measure w0 b0).denote model :=  
  elab_transport_measure_quote model w0 b0
```

### 5.3.350 The skip quotation OpenQASM rendering render/parse round trip

**Statement.** The denotation of the fragment certificate skip quotation equals an explicit expression in the quoted skip spine, the interpretation of a quoted spine, the fragment certificate skip quotation denotation and the skip.

**Proof.** The witness is assembled directly from its components, using the hand-built skip certificate denotes as quoted skip spine.

#### Lean 4 source `QLambda/Linear/FragmentNDenotation.lean`

```
theorem skip_quote_opengasm_roundtrip (model : Composer.Model 1 1) :  
  FragCert.denote fragCert_skip_quote = quoteSkipSpine /\  
  interpretQuoteSpine model (.skip fragCert_skip_quote_denote) =  
  (Command.skip : Command 1 1).denote model /\
```

```

    commandToOpenQASM (Command.skip : Command 1 1) .skip =
      (commandAsProgram (Command.skip : Command 1 1)).renderOpenQASM :=
<fragCert_skip_quote_denote,
  fragCert_skip_quote_spine_interpret model, rfl>

```

### 5.3.351 Alias of the covering-set package for the N-qubit claim surface

**Statement.** Alias of the covering-set package for the N-qubit claim surface.

**Proof.** This is an instance of the covering-set package: t, reset, measure, seq-skip, and branch packaging.

#### Lean 4 source `QLambda/Linear/FragmentNDenotation.lean`

```

theorem n_qubit_quote_cq_covering_set (model : Composer.Model 1 1) :
  (interpretQuoteSpineExt model (.gateT (fragCert_t_quote_denote w0)) =
    (Command.t w0).denote model) /\
  (interpretQuoteSpineExt model
    (.gateReset (fragCert_reset_quote_denote w0)) =
    (Command.reset w0).denote model) /\
  (interpretQuoteSpineExt model
    (.measure (fragCert_measure_quote_denote (0 : Fin 1) (0 : Fin 1))) =
    (Command.measure (0 : Fin 1) (0 : Fin 1)).denote model) /\
  (interpretQuoteSpineExt model
    (.seqSkipSkip fragCert_skip_quote_denote) =
    (Command.seq (.skip : Command 1 1) .skip).denote model) /\
  (forall (guard : Composer.CExpr 1) {yes no : Command 1 1}
    (hYes : yes.Quotable) (hNo : no.Quotable)
    (c : FragCert.Closed (Command.branch guard yes no).quote
      Command.quotationTy),
    interpretQuoteHom model (.branch hYes hNo) c =
    (Command.branch guard yes no).denote model) :=
  fragCert_spine_interprets_t_reset_measure_seq_branch model w0

```

### 5.3.352 Classical-bit discard $\text{Bit} \rightarrow \mathbf{I}$ (Yoneda of discard two)

**Definition.** Classical-bit discard  $\text{Bit} \rightarrow \mathbf{I}$  (Yoneda of discardTwo).

**Construction.** Defined to be the Yoneda image of the discard two.

#### Lean 4 source `QLambda/Linear/FragmentPhysicalBit.lean`

```

noncomputable def bitDiscard :
  Hom (representable 2) dayTensorUnit :=
  yonedaMap SigmaMon.ChoiSum.discardTwo

```

### 5.3.353 Isometric classical copy embedding $|i\rangle \mapsto |ii\rangle (0 \mapsto 0, 1 \mapsto 3)$

**Definition.** Isometric classical copy embedding  $|i\rangle \mapsto |ii\rangle (0 \mapsto 0, 1 \mapsto 3)$ .

**Construction.** The map sending  $pq\ j$  to  $if\ pq.val = j.val * 3\ then\ 1\ else\ 0$ .

#### Lean 4 source `QLambda/Linear/FragmentPhysicalBit.lean`

```

noncomputable def classicalCopyMatrix : Matrix (Fin 4) (Fin 2) ? :=
  fun pq j => if pq.val = j.val * 3 then 1 else 0

```

### 5.3.354 Sum of the finite index 4

**Statement.** For an index  $f$ :  $\sum x = f\ 0 + f\ 1 + f\ 2 + f\ 3$ . Formally:  $\sum x = f\ 0 + f\ 1 + f\ 2 + f\ 3$ .

**Proof.** The key step rewrites with standard identities for finite sums.

**Lean 4 source** [QLambda/Linear/FragmentPhysicalBit.lean](#)

```

private theorem sum_fin4 (f : Fin 4 -> ?) :
  (? x : Fin 4, f x) = f 0 + f 1 + f 2 + f 3 := by
  have huniv : (Finset.univ : Finset (Fin 4)) = {0, 1, 2, 3} := by
    decide
  rw [huniv]
  simp [Finset.sum_insert]
  abel

```

### 5.3.355 The classical copy matrix is an isometry

**Statement.** The product of the conjugate transpose and the classical copy matrix equals  $1 : \text{Matrix} (\text{Fin } 2) (\text{Fin } 2) \mathbb{C}$ .

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with standard identities for matrices, the definition of the classical copy matrix and the sum of the finite index 4.

**Lean 4 source** [QLambda/Linear/FragmentPhysicalBit.lean](#)

```

theorem classicalCopyMatrix_isometry :
  classicalCopyMatrix.conjTranspose * classicalCopyMatrix =
    (1 : Matrix (Fin 2) (Fin 2) ?) := by
  ext i j
  fin_cases i <|> fin_cases j
  * simp only [Matrix.mul_apply, Matrix.conjTranspose_apply, classicalCopyMatrix,
    Matrix.one_apply]
  rw [sum_fin4]; simp
  * simp only [Matrix.mul_apply, Matrix.conjTranspose_apply, classicalCopyMatrix,
    Matrix.one_apply]
  rw [sum_fin4]; simp
  * simp only [Matrix.mul_apply, Matrix.conjTranspose_apply, classicalCopyMatrix,
    Matrix.one_apply]
  rw [sum_fin4]; simp
  * simp only [Matrix.mul_apply, Matrix.conjTranspose_apply, classicalCopyMatrix,
    Matrix.one_apply]
  rw [sum_fin4]; simp

```

### 5.3.356 Classical-bit copy as an isometric superoperator $2 \rightarrow 4$

**Definition.** Classical-bit copy as an isometric superoperator  $2 \rightarrow 4$ .

**Construction.** Defined to be the map induced by the isometry the classical copy matrix isometry property.

**Lean 4 source** `QLambda/Linear/FragmentPhysicalBit.lean`

```
noncomputable def bitCopySuperoperator : Superoperator 2 4 :=
  Superoperator.ofIsometry classicalCopyMatrix classicalCopyMatrix_isometry
```

### 5.3.357 Classical-bit copy into the representable tensor square

**Definition.** Classical-bit copy into the representable tensor square.

**Construction.** Defined to be the Yoneda image of the bit copy superoperator.

**Lean 4 source** `QLambda/Linear/FragmentPhysicalBit.lean`

```
noncomputable def bitCopy :
  Hom (representable 2) (dayTensorRepresentable 2 2) :=
  yonedaMap bitCopySuperoperator
```

### 5.3.358 Definition of the bit dephase superoperator

**Definition.** Computational-basis dephasing, i.e. the channel obtained by copying a bit in the chosen basis and discarding either output. This is the decisive boundary for using `representable 2` as a classical comonoid: coherent off-diagonal inputs are erased.

**Construction.** Constructed by supplying each component: underlying completely positive map and trace nonincreasing. The accompanying laws are verified from the definitions.

**Lean 4 source** `QLambda/Linear/FragmentPhysicalBit.lean`

```
noncomputable def bitDephaseSuperoperator : Superoperator 2 2 where
  cp := (Instrument.measure (0 : Fin 1)).branch 0 +
    (Instrument.measure (0 : Fin 1)).branch 1
  trace_nonincreasing := by
    intro ? h?
    rw [CPMap.applyMat_add_map, Matrix.trace_add, Complex.add_re]
    have h := (Instrument.measure (0 : Fin 1)).trace_nonincreasing ? h?
    simp only [Fin.sum_univ_two, Instrument.measure,
      Instrument.ofQuantumInstrument, CPMap.applyMat_ofKraus,
      KrausFamily.applyMat_single, Composer.projector_conjTranspose] using h
```

### 5.3.359 The classical-basis copy/discard composite is not the identity on the full quantum representable $\mathbf{y}(2)$

**Statement.** The classical-basis copy/discard composite is not the identity on the full quantum representable  $\mathbf{y}(2)$ : it removes the  $|0\rangle\langle 1|$  coherence. Formally: `bitDephaseSuperoperator`  $\neq$  `Superoperator.identity 2`.

**Proof.** The goal is simplified using the definition of the bit dephase superoperator, the action on a matrix of a sum of a mapped family, the measurement of the branch of zero for quantum instruments and the measurement of the branch of one for quantum instruments.

### Lean 4 source `QLambda/Linear/FragmentPhysicalBit.lean`

```
theorem bitDephaseSuperoperator_ne_identity :
  bitDephaseSuperoperator != Superoperator.identity 2 := by
  intro h
  have happ := congrArg (fun f : Superoperator 2 2 =>
    f.cp.applyMat (KrausFamily.matrixUnit 0 1)) h
  have he := congrFun (congrFun happ 0) 1
  simp only [bitDephaseSuperoperator, CPMat.applyMat_add_map,
    Instrument.measure_branch_zero, Instrument.measure_branch_one,
    CPMat.applyMat_ofKraus, Superoperator.identity,
    CPMat.applyMat_identity] at he
  have h00 :
    ((Composer.splitWire (0 : Fin 1)) ((Composer.basisEquiv 1) 0)).1 =
      false := by decide
  have h01 :
    ((Composer.splitWire (0 : Fin 1)) ((Composer.basisEquiv 1) 1)).1 =
      true := by decide
  norm_num [KrausFamily.applyMat, Composer.projector,
    KrausFamily.matrixUnit, Matrix.mul_apply, Matrix.conjTranspose_apply,
    Composer.onWire, Composer.registerSplit, Composer.proj_2, CQ.QDim,
    h00, h01] at he
```

### 5.3.360 The current Route-A representable module of 2 carrier cannot itself satisfy the classical-bit copy/delete equations

**Statement.** The current Route-A representable 2 carrier cannot itself satisfy the classical-bit copy/delete equations. A diagonal/fixed-point carrier (or another genuinely classical carrier) is required before open unrestricted contexts can be interpreted soundly. Formally:  $\text{bitDephaseSuperoperator} \neq \text{Superoperator.identity } 2$ .

**Proof.** This is an instance of the fact that the classical-basis copy/discard composite is not the identity on the full quantum representable  $\gamma(2)$ .

### Lean 4 source `QLambda/Linear/FragmentPhysicalBit.lean`

```
theorem representable_bit_copy_delete_no_go :
  bitDephaseSuperoperator != Superoperator.identity 2 :=
  bitDephaseSuperoperator_ne_identity
```

### 5.3.361 Sum of the finite index 4 of the complex

**Statement.** For an index  $f$ :  $\sum x = f\ 0 + f\ 1 + f\ 2 + f\ 3$ . Formally:  $\sum x = f\ 0 + f\ 1 + f\ 2 + f\ 3$ .

**Proof.** The key step rewrites with standard identities for finite sums. The remaining identity is a polynomial identity in a commutative ring.

### Lean 4 source `QLambda/Linear/FragmentPhysicalBit.lean`

```
private theorem sum_fin4_complex (f : Fin 4 -> ?) :
  (? x : Fin 4, f x) = f 0 + f 1 + f 2 + f 3 := by
  rw [show (Finset.univ : Finset (Fin 4)) = {0, 1, 2, 3} by decide]
```

```
simp [Finset.sum_insert]
ring
```

### 5.3.362 The left discard-after-copy composite on the physical bit carrier

**Definition.** The left discard-after-copy composite on the physical bit carrier.

**Construction.** Defined by an explicit formula built from the composition, the tensor left unitor, the tensor product and the discard two.

**Lean 4 source** [QLambda/Linear/FragmentPhysicalBit.lean](#)

```
noncomputable def bitLeftCounitSuperoperator : Superoperator 2 2 :=
  Superoperator.comp (Superoperator.tensorLeftUnitor 2)
    (Superoperator.comp
      (Superoperator.tensor SigmaMon.ChoiSum.discardTwo
        (Superoperator.identity 2))
      bitCopySuperoperator)
```

### 5.3.363 The right discard-after-copy composite on the physical bit carrier

**Definition.** The right discard-after-copy composite on the physical bit carrier.

**Construction.** Defined by an explicit formula built from the composition, the tensor right unitor, the tensor product and the identity.

**Lean 4 source** [QLambda/Linear/FragmentPhysicalBit.lean](#)

```
noncomputable def bitRightCounitSuperoperator : Superoperator 2 2 :=
  Superoperator.comp (Superoperator.tensorRightUnitor 2)
    (Superoperator.comp
      (Superoperator.tensor (Superoperator.identity 2)
        SigmaMon.ChoiSum.discardTwo)
      bitCopySuperoperator)
```

### 5.3.364 The bit left counit superoperator equals a dephase

**Statement.** The bit left counit superoperator equals the bit dephase superoperator. Formally: `bitLeftCounitSuperoperator = bitDephaseSuperoperator`.

**Proof.** By case analysis on `ai`. The key step rewrites with the Choi matrix of a composite of the map induced by an index equivalence for superoperators, in the left argument, the underlying completely positive map of a composite for superoperators, the coordinate formula for intrinsic Choi composition and the underlying completely positive map of a tensor product for superoperators.

**Lean 4 source** [QLambda/Linear/FragmentPhysicalBit.lean](#)

```
theorem bitLeftCounitSuperoperator_eq_dephase :
  bitLeftCounitSuperoperator = bitDephaseSuperoperator := by
  apply Superoperator.ext
  apply CPMMap.ext
  ext ai bj
  rcases ai with <a, i>
```

```

rcases bj with <b, j>
unfold bitLeftCounitSuperoperator
rw [show Superoperator.tensorLeftUnitor 2 =
    Superoperator.ofEquivalence (Superoperator.tensorLeftUnitorEquiv 2)
    from rfl]
rw [Superoperator.choi_comp_ofEquivalence_left]
have h00 :
    ((Composer.splitWire (0 : Fin 1)) ((Composer.basisEquiv 1) 0)).1 =
        false := by decide
have h01 :
    ((Composer.splitWire (0 : Fin 1)) ((Composer.basisEquiv 1) 1)).1 =
        true := by decide
fin_cases a <;> fin_cases i <;> fin_cases b <;> fin_cases j
all_goals
    simp only [Superoperator.cp_comp, CPMMap.choi_comp_apply,
        Superoperator.cp_tensor, bitCopySuperoperator,
        Superoperator.cp_ofIsometry, CPMMap.choi_tensor,
        Matrix.reindex_apply, Matrix.submatrix_apply,
        Matrix.kroneckerMap_apply, bitDephaseSuperoperator,
        CPMMap.choi_add, Matrix.add_apply, CPMMap.choi_ofKraus,
        Instrument.measure_branch_zero, Instrument.measure_branch_one]
all_goals
    norm_num [CPMap.choiTensorEquiv, classicalCopyMatrix,
        finProdFinEquiv, finOneEquiv, Equiv.punitProd,
        Fin.divNat, Fin.modNat,
        SigmaMon.ChoiSum.discardTwo, SigmaMon.ChoiSum.basisBra,
        Superoperator.identity, CPMMap.identity,
        KrausFamily.choi, KrausFamily.choiTerm, KrausFamily.identity,
        Matrix.one_apply, h00, h01,
        Superoperator.tensorLeftUnitorEquiv,
        Composer.projector, Composer.onWire, Composer.registerSplit,
        Composer.proj_2, CQ.QDim]
all_goals simp [sum_fin4_complex]

```

### 5.3.365 The bit right counit superoperator equals a dephase

**Statement.** The bit right counit superoperator equals the bit dephase superoperator. Formally: `bitRightCounitSuperoperator = bitDephaseSuperoperator`.

**Proof.** By case analysis on `ai`. The key step rewrites with the Choi matrix of a composite of the map induced by an index equivalence for superoperators, in the left argument, the underlying completely positive map of a composite for superoperators, the coordinate formula for intrinsic Choi composition and the underlying completely positive map of a tensor product for superoperators.

#### Lean 4 source `QLambda/Linear/FragmentPhysicalBit.lean`

```

theorem bitRightCounitSuperoperator_eq_dephase :
    bitRightCounitSuperoperator = bitDephaseSuperoperator := by
    apply Superoperator.ext
    apply CPMMap.ext
    ext ai bj
    rcases ai with <a, i>
    rcases bj with <b, j>
    unfold bitRightCounitSuperoperator
    rw [show Superoperator.tensorRightUnitor 2 =

```

```

    Superoperator.ofEquivalence (Superoperator.tensorRightUnitEquiv 2)
  from rfl]
rw [Superoperator.choi_comp_ofEquivalence_left]
have h00 :
  ((Composer.splitWire (0 : Fin 1)) ((Composer.basisEquiv 1) 0)).1 =
    false := by decide
have h01 :
  ((Composer.splitWire (0 : Fin 1)) ((Composer.basisEquiv 1) 1)).1 =
    true := by decide
fin_cases a <|> fin_cases i <|> fin_cases b <|> fin_cases j
all_goals
  simp only [Superoperator.cp_comp, CPMMap.choi_comp_apply,
    Superoperator.cp_tensor, bitCopySuperoperator,
    Superoperator.cp_ofIsometry, CPMMap.choi_tensor,
    Matrix.reindex_apply, Matrix.submatrix_apply,
    Matrix.kroneckerMap_apply, bitDephaseSuperoperator,
    CPMMap.choi_add, Matrix.add_apply, CPMMap.choi_ofKraus,
    Instrument.measure_branch_zero, Instrument.measure_branch_one]
all_goals
  norm_num [CPMap.choiTensorEquiv, classicalCopyMatrix,
    finProdFinEquiv, finOneEquiv, Equiv.prodPUnit,
    Fin.divNat, Fin.modNat,
    SigmaMon.ChoiSum.discardTwo, SigmaMon.ChoiSum.basisBra,
    Superoperator.identity, CPMMap.identity,
    KrausFamily.choi, KrausFamily.choiTerm, KrausFamily.identity,
    Matrix.one_apply, h00, h01,
    Superoperator.tensorRightUnitEquiv,
    Composer.projector, Composer.onWire, Composer.registerSplit,
    Composer.proj_2, CQ.QDim]
all_goals simp [sum_fin4_complex]

```

### 5.3.366 Both concrete physical-bit counit composites fail: each is dephasing, not identity

**Statement.** Both concrete physical-bit counit composites fail: each is dephasing, not identity. Formally:  
 $\text{bitLeftCounitSuperoperator} \neq \text{Superoperator.identity } 2 \wedge \text{bitRightCounitSuperoperator} \neq \text{Superoperator.identity } 2$ .

**Proof.** Each component of the claim is established separately. The key step rewrites with the fact that the bit left counit superoperator equals a dephase, the fact that the bit right counit superoperator equals a dephase and the fact that the classical-basis copy/discard composite is not the identity on the full quantum representable  $\gamma(2)$ .

#### Lean 4 source `QLambda/Linear/FragmentPhysicalBit.lean`

```

theorem concrete_bit_copy_discard_not_counital :
  bitLeftCounitSuperoperator != Superoperator.identity 2 /\
  bitRightCounitSuperoperator != Superoperator.identity 2 := by
  constructor
  * rw [bitLeftCounitSuperoperator_eq_dephase]
    exact bitDephaseSuperoperator_ne_identity
  * rw [bitRightCounitSuperoperator_eq_dephase]
    exact bitDephaseSuperoperator_ne_identity

```



### 5.3.367 The physical copy transported from the representable tensor presentation to the genuine coend Day tensor

**Definition.** The physical copy transported from the representable tensor presentation to the genuine coend Day tensor.

**Construction.** Defined to be the composite of  $(\text{dayTensorRepresentableIso } 2 \ 2) . \text{inv}$  after the bit copy.

**Lean 4 source** `QLambda/Linear/FragmentPhysicalBit.lean`

```
noncomputable def physicalBitCopyDay :
  Hom (representable 2)
    (dayTensor (representable 2) (representable 2)) :=
  Hom.comp (dayTensorRepresentableIso 2 2).inv bitCopy
```

### 5.3.368 Left counit composite for the concrete physical-bit copy

**Definition.** Left counit composite for the concrete physical-bit copy.

**Construction.** Defined by an explicit formula built from the composition, the left unitor, the representable module and the functorial action.

**Lean 4 source** `QLambda/Linear/FragmentPhysicalBit.lean`

```
noncomputable def physicalBitLeftCounit :
  Hom (representable 2) (representable 2) :=
  Hom.comp (DayTensor.leftUnitor (representable 2))
    (Hom.comp
      (DayTensor.map bitDiscard (Hom.id (representable 2)))
      physicalBitCopyDay)
```

### 5.3.369 Physical bit copy Day of the application of the identity

**Statement.** The application of the identity on dimension 2 at 2 equals an explicit expression in the Day tensor product, the representable module, the introduction and the identity.

**Proof.** The key step rewrites with the definition of the postcomposition, the tensor product of an identity, the representable module of the act and the identity of a composite for superoperators.

**Lean 4 source** `QLambda/Linear/FragmentPhysicalBit.lean`

```
private theorem physicalBitCopyDay_app_identity :
  physicalBitCopyDay.app 2 (Superoperator.identity 2) =
    (dayTensor (representable 2) (representable 2)).act
      ((DayCoend.intro (representable 2) (representable 2)).app
        (Superoperator.identity 2) (Superoperator.identity 2))
      bitCopySuperoperator := by
  let e := dayTensorRepresentableIso 2 2
  have hpres :=
    ((dayTensorRepresentablePresentation 2 2).universal
      (dayTensorPresentation
        (representable 2) (representable 2)).object).apply_symm_apply
      (dayTensorPresentation (representable 2) (representable 2)).intro
```

```

rw [(dayTensorRepresentablePresentation 2 2).universal_apply] at hpres
have hbase := congrArg
  (fun b : Bilinear (representable 2) (representable 2)
    (dayTensor (representable 2) (representable 2)) =>
    b.app (Superoperator.identity 2) (Superoperator.identity 2)) hpres
dsimp only [Bilinear.postcomp] at hbase
change
  (((dayTensorRepresentablePresentation 2 2).universal
    (dayTensorPresentation
      (representable 2) (representable 2)).object).symm
    (dayTensorPresentation
      (representable 2) (representable 2)).intro).app 4
    (Superoperator.tensor (Superoperator.identity 2)
      (Superoperator.identity 2)) =
    (DayCoend.intro (representable 2) (representable 2)).app
      (Superoperator.identity 2) (Superoperator.identity 2) at hbase
rw [Superoperator.tensor_identity] at hbase
change e.inv.app 4 (Superoperator.identity 4) =
  (DayCoend.intro (representable 2) (representable 2)).app
    (Superoperator.identity 2) (Superoperator.identity 2) at hbase
have hnata := e.inv.naturality
  (Superoperator.identity 4) bitCopySuperoperator
simp only [representable_act, Superoperator.identity_comp] at hnata
change e.inv.app 2 bitCopySuperoperator =
  (dayTensor (representable 2) (representable 2)).act
    (e.inv.app 4 (Superoperator.identity 4)) bitCopySuperoperator at hnata
unfold physicalBitCopyDay bitCopy
change (dayTensorRepresentableIso 2 2).inv.app 2
  ((yonedaMap bitCopySuperoperator).app 2
    (Superoperator.identity 2)) = _
rw [yonedaMap_app, Superoperator.comp_identity]
rw [hnata, hbase]

```

### 5.3.370 Physical bit left counit of the application of the identity

**Statement.** The application of the identity on dimension 2 at 2 equals the bit left counit superoperator.

**Proof.** The key step rewrites with the physical bit copy Day of the application of the identity, the functorial action for observational equalities, the components of the Yoneda image and the composition of the identity for superoperators.

#### Lean 4 source `QLambda/Linear/FragmentPhysicalBit.lean`

```

theorem physicalBitLeftCounit_app_identity :
  physicalBitLeftCounit.app 2 (Superoperator.identity 2) =
    bitLeftCounitSuperoperator := by
  unfold physicalBitLeftCounit
  change (DayTensor.leftUnitor (representable 2)).app 2
    ((DayTensor.map bitDiscard
      (Hom.id (representable 2))).app 2
      (physicalBitCopyDay.app 2 (Superoperator.identity 2))) =
    bitLeftCounitSuperoperator
  rw [physicalBitCopyDay_app_identity]
  rw [(DayTensor.map bitDiscard
    (Hom.id (representable 2))).naturality]

```

```

have hmap := DayTensor.map_intro bitDiscard
  (Hom.id (representable 2))
  (Superoperator.identity 2) (Superoperator.identity 2)
rw [hmap]
have hdiscard :
  bitDiscard.app 2 (Superoperator.identity 2) =
    SigmaMon.ChoiSum.discardTwo := by
  unfold bitDiscard
  rw [yonedaMap_app, Superoperator.comp_identity]
have hid :
  (Hom.id (representable 2)).app 2
    (Superoperator.identity 2) =
  Superoperator.identity 2 := by
  rfl
rw [hdiscard, hid]
rw [(DayTensor.leftUnitor (representable 2)).naturality]
have hleft := DayTensor.leftUnitor_intro
  (M := representable 2)
  SigmaMon.ChoiSum.discardTwo
  (Superoperator.identity 2)
rw [hleft]
unfold bitLeftCounitSuperoperator
simp only [representable_act, Superoperator.identity_comp]
exact (Superoperator.comp_assoc _ _ _).symm

```

### 5.3.371 The physical bit left counit equals a dephase

**Statement.** The physical bit left counit equals the Yoneda image of the bit dephase superoperator. Formally:  $\text{physicalBitLeftCounit} = \text{yonedaMap bitDephaseSuperoperator}$ .

**Proof.** The key step rewrites with the physical bit left counit of the application of the identity, the components of the Yoneda image, the composition of the identity for superoperators and the fact that the bit left counit superoperator equals a dephase.

#### Lean 4 source `QLambda/Linear/FragmentPhysicalBit.lean`

```

theorem physicalBitLeftCounit_eq_dephase :
  physicalBitLeftCounit = yonedaMap bitDephaseSuperoperator := by
  apply (yonedaEquiv (representable 2) 2).injective
  change physicalBitLeftCounit.app 2 (Superoperator.identity 2) =
    (yonedaMap bitDephaseSuperoperator).app 2
    (Superoperator.identity 2)
  rw [physicalBitLeftCounit_app_identity, yonedaMap_app,
    Superoperator.comp_identity, bitLeftCounitSuperoperator_eq_dephase]

```

### 5.3.372 The physical bit copy discard not left counitality

**Statement.** Exact F2 boundary: the stated copy/discard maps on representable 2 violate the left counit equation in the genuine Day tensor. Formally:  $\text{physicalBitLeftCounit} \neq \text{Hom.id (representable 2)}$ .

**Proof.** The key step rewrites with the physical bit left counit of the application of the identity, the fact that the bit left counit superoperator equals a dephase and the fact that the classical-basis copy/discard

composite is not the identity on the full quantum representable  $\gamma(2)$ .

#### Lean 4 source `QLambda/Linear/FragmentPhysicalBit.lean`

```
theorem physical_bit_copy_discard_not_left_counital :
  physicalBitLeftCounit != Hom.id (representable 2) := by
  intro h
  have happ := congrArg
    (fun f : Hom (representable 2) (representable 2) =>
      f.app 2 (Superoperator.identity 2)) h
  rw [physicalBitLeftCounit_app_identity] at happ
  change bitLeftCounitSuperoperator =
    Superoperator.identity 2 at happ
  rw [bitLeftCounitSuperoperator_eq_dephase] at happ
  exact bitDephaseSuperoperator_ne_identity happ
```

### 5.3.373 Computational-basis dephasing is idempotent

**Statement.** Computational-basis dephasing is idempotent. Formally: `Superoperator.comp bitDephaseSuperoperator bitDephaseSuperoperator = bitDephaseSuperoperator`.

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the underlying completely positive map of a composite for superoperators, the action on a matrix of a composition, the definition of the bit dephase superoperator and the action on a matrix of a sum of a mapped family.

#### Lean 4 source `QLambda/Linear/FragmentPhysicalBit.lean`

```
theorem bitDephaseSuperoperator_idempotent :
  Superoperator.comp bitDephaseSuperoperator bitDephaseSuperoperator =
    bitDephaseSuperoperator := by
  apply Superoperator.ext
  apply CPMat.ext_apply
  intro ?
  rw [Superoperator.cp_comp, CPMat.applyMat_comp]
  have h00 :
    ((Composer.splitWire (0 : Fin 1)) ((Composer.basisEquiv 1) 0)).1 =
      false := by decide
  have h01 :
    ((Composer.splitWire (0 : Fin 1)) ((Composer.basisEquiv 1) 1)).1 =
      true := by decide
  ext a b
  fin_cases a <|> fin_cases b
  all_goals
    simp [bitDephaseSuperoperator, CPMat.applyMat_add_map,
      Instrument.measure_branch_zero, Instrument.measure_branch_one,
      CPMat.applyMat_ofKraus, KrausFamily.applyMat,
      Composer.projector, Matrix.mul_apply, Matrix.conjTranspose_apply,
      Composer.onWire, Composer.registerSplit, Composer.proj_2, CQ.QDim,
      h00, h01]
```

### 5.3.374 Maps into a classical bit are precisely the maps fixed by computational basis dephasing

**Definition.** Maps into a classical bit are precisely the maps fixed by computational basis dephasing. This separates unrestricted classical data from the physical qubit carrier `representable 2`.

**Construction.** Constructed by supplying each component of the structure explicitly.

#### Lean 4 source `QLambda/Linear/FragmentPhysicalBit.lean`

```
abbrev ClassicalBitCarrier (n : Nat) := {x : Superoperator n 2 //
  Superoperator.comp bitDephaseSuperoperator x = x}
```

### 5.3.375 Syntactic upper bound on live wires appearing in a term's qubit-typed subexpressions (conservative)

**Definition.** Syntactic upper bound on live wires appearing in a term's qubit-typed subexpressions (conservative: counts `prim new0` and qubit variables).

**Construction.** Defined by cases on the input: `_`, `.unit` | `_`, `.bitLit` `_`  $\mapsto$  True; `_`, `.var` `_` `_`  $\mapsto$  True; `n`, `.prim` `.new0`  $\mapsto$  the `n` of  $\geq$  at 1; `_`, `.prim` `_`  $\mapsto$  True; `n`, `.lam` `_` `_` `M`  $\mapsto$  the qubit-usage bound of `n` and `M`; `n`, `.app` `F` `X`  $\mapsto$  `UsesAtMostQubits n F`  $\wedge$  `UsesAtMostQubits n X`; `n`, `.pair` `M` `N`  $\mapsto$  `UsesAtMostQubits n M`  $\wedge$  `UsesAtMostQubits n N`; `n`, `.unpair` `M` `K`  $\mapsto$  `UsesAtMostQubits n M`  $\wedge$  `UsesAtMostQubits n K`; and so on for the remaining cases.

#### Lean 4 source `QLambda/Linear/FragmentRuntimeCore.lean`

```
def UsesAtMostQubits : Nat -> Term -> Prop
| _, .unit | _, .bitLit _ => True
| _, .var _ _ => True
| n, .prim .new0 => n >= 1
| _, .prim _ => True
| n, .lam _ _ M => UsesAtMostQubits n M
| n, .app F X => UsesAtMostQubits n F /\ UsesAtMostQubits n X
| n, .pair M N => UsesAtMostQubits n M /\ UsesAtMostQubits n N
| n, .unpair M K => UsesAtMostQubits n M /\ UsesAtMostQubits n K
| n, .ite B T E =>
  UsesAtMostQubits n B /\ UsesAtMostQubits n T /\ UsesAtMostQubits n E
| n, .measure Q K => UsesAtMostQubits n Q /\ UsesAtMostQubits n K
| _, .fix _ _ | _, .fold _ _ | _, .unfold _ => False
```

### 5.3.376 Monotonicity of qubit-usage bounds

**Statement.** For natural numbers `n`, `m`, a term `M`: if `n`  $\leq$  `m` and `M` uses at most `n` qubits, then `M` uses at most `m` qubits.

**Proof.** By induction on the term `M`. For a unit, a bit literal and a variable, the claim is one of the premises of the rule; for a primitive, the claim is checked directly; for a lambda abstraction, an application, a pair, a pair elimination, a conditional and a measurement, the claim follows from the induction hypothesis; the cases of a least fixed point, a fold and an unfolding cannot occur, since it contradicts the hypothesis that `M` uses at most `n` qubits. It follows from transitivity of the order and the hypothesis that `M` uses at most `n` qubits.

#### Lean 4 source `QLambda/Linear/FragmentRuntimeCore.lean`

```
theorem UsesAtMostQubits.mono {n m : Nat} {M : Term}
  (hle : n <= m) (h : UsesAtMostQubits n M) : UsesAtMostQubits m M := by
```

```

induction M generalizing n m with
| unit | bitLit | var => exact trivial
| prim p =>
  cases p with
  | new0 => exact Nat.le_trans h hle
  | _ => exact trivial
| lam _ _ _ ih => exact ih hle h
| app F X ihF ihX => exact <ihF hle h.1, ihX hle h.2>
| pair M N ihM ihN => exact <ihM hle h.1, ihN hle h.2>
| unpair M K ihM ihK => exact <ihM hle h.1, ihK hle h.2>
| ite B T E ihB ihT ihE =>
  exact <ihB hle h.1, ihT hle h.2.1, ihE hle h.2.2>
| measure Q K ihQ ihK => exact <ihQ hle h.1, ihK hle h.2>
| fix | fold | unfold => exact h.elim

```

### 5.3.377 Qubit-usage bound of the unit

**Statement.** For a natural number  $N$ : `.unit` uses at most  $N$  qubits. Formally: `UsesAtMostQubits N .unit`.

**Proof.** The statement is trivially true.

**Lean 4 source** [QLambda/Linear/FragmentRuntimeCore.lean](#)

```
theorem usesAtMost_unit (N : Nat) : UsesAtMostQubits N .unit := trivial
```

### 5.3.378 Qubit-usage bound of the bit literal

**Statement.** For a natural number  $N$ , a bit `_b`: `.bitLit _b` uses at most  $N$  qubits.

**Proof.** The statement is trivially true.

**Lean 4 source** [QLambda/Linear/FragmentRuntimeCore.lean](#)

```
theorem usesAtMost_bitLit (N : Nat) (_b : Bool) :
  UsesAtMostQubits N (.bitLit _b) := trivial
```

### 5.3.379 Runtime register bound: configurations with at most $N$ quantum wires

**Definition.** Runtime register bound: configurations with at most  $N$  quantum wires.

**Construction.** Defined to be the quantum of  $\leq$  and  $N$ .

**Lean 4 source** [QLambda/Linear/FragmentRuntimeCore.lean](#)

```
def RuntimeUsesAtMost (N : Nat) {q : Nat} (_? : Runtime.Config q) : Prop :=
  q <= N
```

### 5.3.380 Monotonicity of runtime qubit-usage bounds

**Statement.** For natural numbers  $N, M, q$ : if  $N \leq M$  and  $\text{RuntimeUsesAtMost } N \ \rho$ , then  $\text{RuntimeUsesAtMost } M \ \rho$ .

**Proof.** This is an instance of transitivity of the order, applied to the hypothesis that  $\text{RuntimeUsesAtMost } N \ \rho$  and the hypothesis that  $N \leq M$ .

**Lean 4 source** [QLambda/Linear/FragmentRuntimeCore.lean](#)

```
theorem RuntimeUsesAtMost.mono {N M : Nat} {q : Nat} {? : Runtime.Config q}
  (hle : N <= M) (h : RuntimeUsesAtMost N ?) : RuntimeUsesAtMost M ? :=
  Nat.le_trans h hle
```

### 5.3.381 One-step Born mass: runtime measure probabilities sum to one

**Statement.** One-step Born mass: runtime measure probabilities sum to one. Formally:  $\text{Runtime.RegisterState.measureProbability } \rho \ w \ \text{false} + \text{Runtime.RegisterState.measureProbability } \rho \ w \ \text{true} = 1$ .

**Proof.** This is an instance of the two runtime measurement branches exhaust unit probability.

**Lean 4 source** [QLambda/Linear/FragmentRuntimeCore.lean](#)

```
theorem n_bounded_measureProbability_sum (q : Nat) (w : Fin q)
  (? : Runtime.RegisterState q) :
  Runtime.RegisterState.measureProbability ? w false +
  Runtime.RegisterState.measureProbability ? w true = 1 :=
  Runtime.RegisterState.measureProbability_false_add_true ? w
```

### 5.3.382 $N$ of the bounded measurement branch of the completed CP class

**Statement.** Denotational measurement branches agree with Yoneda / CompletedCP. Formally:  $\text{routeAFragmentModel.measureBranch } b = \text{measureBranchYoneda } b$ .

**Proof.** This is an instance of the fact that measurement branch maps agree with the Yoneda packaging.

**Lean 4 source** [QLambda/Linear/FragmentRuntimeCore.lean](#)

```
theorem n_bounded_measureBranch_completedCP (b : Bool) :
  routeAFragmentModel.measureBranch b = measureBranchYoneda b :=
  fragment_measureBranch_agrees b
```

### 5.3.383 Runtime Born mass is the Born-rule weight of the Kraus measurement branch (definitional)

**Statement.** Runtime Born mass is the  $\text{NormalizedDensity.bornWeight}$  of the Kraus measurement branch (definitional).

**Proof.** By definition. Unfolding the measurement probability turns the left-hand side, the measurement probability of  $\rho$  and  $b$  at 0, into the right-hand side, the Born-rule weight of the measurement branch of  $b$  at 0 and  $\rho$ ; the two sides are the same term.

**Lean 4 source** [QLambda/Linear/FragmentRuntimeCore.lean](#)

```

theorem measureProbability_eq_yoneda_branch_mass
  (? : Runtime.RegisterState 1) (b : Bool) :
  Runtime.RegisterState.measureProbability ? (0 : Fin 1) b =
  NormalizedDensity.bornWeight
  (Runtime.RegisterState.measureBranch (0 : Fin 1) b) ? :=
  rfl

```

### 5.3.384 The same Born mass equals the Instrument branch CP-map trace

**Statement.** The same Born mass equals the Instrument branch CP-map trace.

**Proof.** By case analysis on the bit  $b$ . For true and false, the claim is checked directly. The key step rewrites with the fact that runtime Born mass is the Born-rule weight of the Kraus measurement branch (definitional), the definition of the measurement branch, the definition of the Born-rule weight and the definition of the branch superoperator.

#### Lean 4 source `QLambda/Linear/FragmentRuntimeCore.lean`

```

theorem measureProbability_eq_instrument_branch_trace
  (? : Runtime.RegisterState 1) (b : Bool) :
  Runtime.RegisterState.measureProbability ? (0 : Fin 1) b =
  (Matrix.trace
    (((Instrument.measure (0 : Fin 1)).branchSuperoperator
      (if b then (1 : Fin 2) else 0)).cp.applyMat ? .mat)).re := by
  cases b with
  | true =>
    simp only [measureProbability_eq_yoneda_branch_mass,
      Runtime.RegisterState.measureBranch, NormalizedDensity.bornWeight,
      Instrument.branchSuperoperator]
    change
      (Matrix.trace
        (KrausFamily.applyMat
          [Composer.projector (0 : Fin 1) true] ? .mat)).re =
      (Matrix.trace
        (CPMap.applyMat
          ((Instrument.measure (0 : Fin 1)).branch 1) ? .mat)).re
    rw [Instrument.measure_branch_one, CPMap.applyMat_ofKraus]
  | false =>
    simp only [measureProbability_eq_yoneda_branch_mass,
      Runtime.RegisterState.measureBranch, NormalizedDensity.bornWeight,
      Instrument.branchSuperoperator]
    change
      (Matrix.trace
        (KrausFamily.applyMat
          [Composer.projector (0 : Fin 1) false] ? .mat)).re =
      (Matrix.trace
        (CPMap.applyMat
          ((Instrument.measure (0 : Fin 1)).branch 0) ? .mat)).re
    rw [Instrument.measure_branch_zero, CPMap.applyMat_ofKraus]

```



### 5.3.385 Single-qubit measurement of $K$ is 1-bounded whenever $K$ is

**Statement.** Single-qubit measurement (app (prim new0) unit)  $K$  is 1-bounded whenever  $K$  is. Formally: `UsesAtMostQubits N (.measure (.app (.prim .new0) .unit) K)`.

**Proof.** The witness is assembled directly from its components.

**Lean 4 source** `QLambda/Linear/FragmentRuntimeCore.lean`

```
theorem usesAtMost_measure_new0 (N : Nat) (K : Term)
  (hN : 1 <= N) (hK : UsesAtMostQubits N K) :
  UsesAtMostQubits N (.measure (.app (.prim .new0) .unit) K) :=
  <<Nat.le_trans (Nat.le_refl 1) hN, trivial>, hK>
```

### 5.3.386 Measurement continuation that returns the post-measurement qubit (linear identity; unrestricted bit is weakened)

**Definition.** Measurement continuation that returns the post-measurement qubit (linear identity; unrestricted bit is weakened).

**Construction.** Defined to be the lambda abstraction of an unrestricted, a bit, the lambda abstraction of a linear, a qubit, `.var .lin 0`.

**Lean 4 source** `QLambda/Linear/FragmentRuntimeCore.lean`

```
def measureNew0Cont : Term :=
  .lam .unres .bit (.lam .lin .qubit (.var .lin 0))
```

### 5.3.387 Closed measured program: allocate $|0\rangle$ , measure, return the retained qubit

**Definition.** Closed measured program: allocate  $|0\rangle$ , measure, return the retained qubit.

**Construction.** Defined to be the measurement of wire the measurement new 0 continuation.

**Lean 4 source** `QLambda/Linear/FragmentRuntimeCore.lean`

```
def measureNew0Program : Term :=
  .measure (.app (.prim .new0) .unit) measureNew0Cont
```

### 5.3.388 Qubit-usage bound of the measurement of the fresh zero-qubit allocation of the continuation

**Statement.** `measureNew0Program` uses at most 1 qubits. Formally: `UsesAtMostQubits 1 measureNew0Program`.

**Proof.** This is an instance of the fact that single-qubit measurement of  $K$  is 1-bounded whenever  $K$  is, applied to the definition of the measurement new 0 continuation.

**Lean 4 source** `QLambda/Linear/FragmentRuntimeCore.lean`

```
theorem usesAtMost_measure_new0_cont :
  UsesAtMostQubits 1 measureNew0Program :=
  usesAtMost_measure_new0 1 measureNew0Cont (Nat.le_refl 1)
  (by simp [measureNew0Cont, UsesAtMostQubits])
```

### 5.3.389 Admissibility of the measurement of the bit

**Statement.** `.bit` is admissible. Formally: `Ty.Admissible .bit`.

**Proof.** The claim is a finite computation and is checked by evaluating it.

**Lean 4 source** [QLambda/Linear/FragmentRuntimeCore.lean](#)

```
private theorem measure_bit_admissible : Ty.Admissible .bit := by decide
```

### 5.3.390 Admissibility of the measurement of the qubit

**Statement.** `.qubit` is admissible. Formally: `Ty.Admissible .qubit`.

**Proof.** The claim is a finite computation and is checked by evaluating it.

**Lean 4 source** [QLambda/Linear/FragmentRuntimeCore.lean](#)

```
private theorem measure_qubit_admissible : Ty.Admissible .qubit := by decide
```

### 5.3.391 Duplicability of the measurement of the bit

**Statement.** `Ty.Duplicable .bit`. Formally: `Ty.Duplicable .bit`.

**Proof.** The claim is a finite computation and is checked by evaluating it.

**Lean 4 source** [QLambda/Linear/FragmentRuntimeCore.lean](#)

```
private theorem measure_bit_duplicable : Ty.Duplicable .bit := by decide
```

### 5.3.392 Measurement of the unrestricted context of the bit

**Statement.** Every unrestricted variable of `[.bit]` has bit type. Formally: `CtxUAllBit [.bit]`.

**Proof.** This is an instance of the extended list for all-bit unrestricted contexts, applied to the empty list for all-bit unrestricted contexts.

**Lean 4 source** [QLambda/Linear/FragmentRuntimeCore.lean](#)

```
private theorem measure_ctxU_bit : CtxUAllBit [.bit] :=  
  CtxUAllBit.cons CtxUAllBit.nil
```

### 5.3.393 Measurement of the linear context of the qubit

**Statement.** Every cell of the linear context `[some .qubit]` is occupied by a fragment type.

**Proof.** This is an instance of the extended list of an occupied cell for fully occupied fragment linear contexts, applied to the qubit for semantic fragments and the empty list for fully occupied fragment linear contexts.

**Lean 4 source** [QLambda/Linear/FragmentRuntimeCore.lean](#)

```
private theorem measure_ctxL_qubit :
  CtxLAllSomeFragment [some (.qubit : Ty)] :=
  CtxLAllSomeFragment.cons_some Ty.SemanticFragment.qubit
  CtxLAllSomeFragment.nil
```

### 5.3.394 Closed certificate for app (prim new0) unit

**Definition.** Closed certificate for app (prim new0) unit.

**Construction.** Defined by an explicit formula built from the empty list, the unit, the qubit and the closed term primitive certificate.

**Lean 4 source** [QLambda/Linear/FragmentRuntimeCore.lean](#)

```
noncomputable def fragCert_app_new0_unit :
  FragCert.Closed (.app (.prim .new0) .unit) .qubit :=
  .appL CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil
  Ty.FirstOrder.unit Ty.SemanticFragment.qubit
  (FragCert.closed_prim_cert .new0) FragCert.closed_unit_cert
```

### 5.3.395 Linear body linear variable of 0 of the measure continuation

**Definition.** Linear body varL 0 of the measure continuation.

**Construction.** Defined by an explicit formula built from the measurement context unrestricted bit, the measurement context linear qubit, the zero and the single-cell usage mask.

**Lean 4 source** [QLambda/Linear/FragmentRuntimeCore.lean](#)

```
noncomputable def fragCert_measure_new0_varL :
  FragCert [.bit] [some .qubit] (.var .lin 0) .qubit :=
  .varL measure_ctxU_bit measure_ctxL_qubit Lookup.zero
  (by simp [OnlySomeAt, AllNone]) Ty.SemanticFragment.qubit
```

### 5.3.396 Inner linear abstraction of measurement new 0 continuation

**Definition.** Inner linear abstraction of measureNew0Cont.

**Construction.** Defined by an explicit formula built from the measurement context unrestricted bit, the empty list, the measurement qubit admissibility and the qubit.

**Lean 4 source** [QLambda/Linear/FragmentRuntimeCore.lean](#)

```
noncomputable def fragCert_measure_new0_lamL :
  FragCert [.bit] []
  (.lam .lin .qubit (.var .lin 0))
  (.arrow .lin .qubit .qubit) :=
  .lamL measure_ctxU_bit CtxLAllSomeFragment.nil measure_qubit_admissible
  Ty.FirstOrder.qubit Ty.SemanticFragment.qubit fragCert_measure_new0_varL
```

### 5.3.397 Closed certificate for the measure continuation

**Definition.** Closed certificate for the measure continuation.

**Construction.** Defined by an explicit formula built from the empty list, the measurement bit admissibility, the measurement bit duplicability and the qubit.

**Lean 4 source** [QLambda/Linear/FragmentRuntimeCore.lean](#)

```
noncomputable def fragCert_measure_new0_cont :
  FragCert.Closed measureNew0Cont
    (.arrow.unres .bit (.arrow.lin .qubit .qubit)) :=
.lamU CtxUAllBit.nil CtxLAllSomeFragment.nil measure_bit_admissible
  measure_bit_duplicable trivial
  (.arrowUnresBit (.arrowLin Ty.FirstOrder.qubit Ty.SemanticFragment.qubit))
  fragCert_measure_new0_lamL
```

### 5.3.398 Closed fragment certificate for measurement new 0 program

**Definition.** Closed FragCert for measureNew0Program.

**Construction.** Defined by an explicit formula built from the empty list, the qubit, the fragment certificate component new 0 unit and the fragment certificate measurement new 0 continuation.

**Lean 4 source** [QLambda/Linear/FragmentRuntimeCore.lean](#)

```
noncomputable def closed_measure_new0_cert :
  FragCert.Closed measureNew0Program .qubit :=
.measure CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil
  Ty.SemanticFragment.qubit
  fragCert_app_new0_unit fragCert_measure_new0_cont
```

### 5.3.399 Denotation of the closed measured program expands through measurement elimination

**Statement.** Denotation of the closed measured program expands through measureElim.

**Proof.** This is an instance of the formula for the denotation of the measurement, applied to the empty list for all-bit unrestricted contexts, the empty list for fully occupied fragment linear contexts, the empty list for all-fragment unrestricted contexts, the qubit for semantic fragments, the definition of the fragment certificate component new 0 unit and the definition of the fragment certificate measurement new 0 continuation.

**Lean 4 source** [QLambda/Linear/FragmentRuntimeCore.lean](#)

```
theorem denote_closed_measure_new0 :
  FragCert.denote closed_measure_new0_cert =
    Hom.comp (FragCert.measureElim _)
      (Hom.comp
        (DayTensor.map
          (FragCert.denote fragCert_app_new0_unit)
          (FragCert.denote fragCert_measure_new0_cont))
        (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil)) :=
  FragCert.denote_measure_eq CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil
    Ty.SemanticFragment.qubit fragCert_app_new0_unit fragCert_measure_new0_cont
```

### 5.3.400 Allocation leaf expands through FO Day eval of primitive on unit

**Statement.** Allocation leaf expands through FO Day eval of `prim new0` on unit.

**Proof.** This is an instance of the formula for the denotation of the linear application, applied to the empty list for all-bit unrestricted contexts, the empty list for fully occupied fragment linear contexts, the empty list for all-fragment unrestricted contexts, the definition of the unit, the qubit for semantic fragments, the definition of the closed term primitive certificate and the definition of the closed term unit certificate.

#### Lean 4 source `QLambda/Linear/FragmentRuntimeCore.lean`

```
theorem denote_app_new0_unit :
  FragCert.denote fragCert_app_new0_unit =
    Hom.comp
      (FragmentContext.evalFragmentFirstOrder Ty.FirstOrder.unit _)
      (Hom.comp
        (DayTensor.map
          (FragCert.denote (FragCert.closed_prim_cert .new0))
          (FragCert.denote FragCert.closed_unit_cert))
        (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil)) :=
  FragCert.denote_appL_eq CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil
  Ty.FirstOrder.unit Ty.SemanticFragment.qubit
  (FragCert.closed_prim_cert .new0) FragCert.closed_unit_cert
```

### 5.3.401 Fresh zero-qubit allocation Kraus presentation is exactly $|0\rangle$ allocation

**Statement.** `Prim.new0` Kraus presentation is exactly  $|0\rangle$  allocation. Formally: `Prim.kraus .new0` = `[Prim.ketZero]`.

**Proof.** By definition. The left-hand side is the Kraus operators of fresh-qubit allocation; the Kraus operators is defined by cases, and its defining clause for fresh-qubit allocation returns `[ketZero]`, which reduces to the right-hand side `[Prim.ketZero]`. No computation beyond unfolding this clause is needed.

#### Lean 4 source `QLambda/Linear/FragmentRuntimeCore.lean`

```
theorem prim_new0_kraus_eq_ketZero :
  Prim.kraus .new0 = [Prim.ketZero] :=
  rfl
```

### 5.3.402 $|0\rangle$ is an isometry $\mathbb{C} \rightarrow \mathbb{C}^2$

**Statement.**  $|0\rangle$  is an isometry  $\mathbb{C} \rightarrow \mathbb{C}^2$ . Formally: `Matrix.conjTranspose Prim.ketZero * Prim.ketZero` = `(1 : Matrix (Fin 1) (Fin 1)  $\mathbb{C}$ )`.

**Proof.** Both sides are compared pointwise (by extensionality). The goal is simplified using the definition of the zero ket and standard identities for matrices. Every finite index is checked separately.

#### Lean 4 source `QLambda/Linear/FragmentRuntimeCore.lean`

```
theorem ketZero_isometry :
  Matrix.conjTranspose Prim.ketZero * Prim.ketZero =
    (1 : Matrix (Fin 1) (Fin 1) ?) := by
  ext i j
  fin_cases i; fin_cases j
  simp [Prim.ketZero, Matrix.mul_apply, Matrix.conjTranspose_apply]
```

### 5.3.403 Unit density on the zero-qubit register (scalar 1)

**Definition.** Unit density on the zero-qubit register (scalar 1).

**Construction.** Constructed by supplying each component: underlying matrix, positive semidefiniteness and trace equality one. The accompanying laws are verified from the definitions.

**Lean 4 source** `QLambda/Linear/FragmentRuntimeCore.lean`

```
noncomputable def unitRegister0 : Runtime.RegisterState 0 where
  mat := 1
  posSemidef := Matrix.PosSemidef.one
  trace_eq_one := by
    simp [Matrix.trace_one]
```

### 5.3.404 Runtime register obtained by allocating $|0\rangle$ via zero ket

**Definition.** Runtime register obtained by allocating  $|0\rangle$  via `Prim.ketZero`.

**Construction.** Constructed by supplying each component: underlying matrix, positive semidefiniteness and trace equality one. The accompanying laws are verified from the definitions.

**Lean 4 source** `QLambda/Linear/FragmentRuntimeCore.lean`

```
noncomputable def registerKetZero : Runtime.RegisterState 1 where
  mat := KrausFamily.applyMat [Prim.ketZero] unitRegister0.mat
  posSemidef :=
    KrausFamily.applyMat_posSemidef [Prim.ketZero] unitRegister0.posSemidef
  trace_eq_one :=
    (KrausFamily.trace_applyMat_isometry Prim.ketZero ketZero_isometry
     unitRegister0.mat).trans unitRegister0.trace_eq_one
```

### 5.3.405 Allocation agrees definitionally with the fresh zero-qubit allocation Kraus action

**Statement.** Allocation agrees definitionally with the `new0` Kraus action. Formally: `registerKetZero.mat = KrausFamily.applyMat (Prim.kraus .new0) unitRegister0.mat`.

**Proof.** By definition: the left-hand side, the underlying matrix, and the right-hand side, the action of the Kraus operators of fresh-qubit allocation on the underlying matrix, unfold to the same term.

**Lean 4 source** `QLambda/Linear/FragmentRuntimeCore.lean`

```
theorem registerKetZero_eq_new0_apply :
  registerKetZero.mat =
    KrausFamily.applyMat (Prim.kraus .new0) unitRegister0.mat :=
  rfl
```

### 5.3.406 Explicit matrix entries of the prepared $|0\rangle\langle 0|$ register

**Statement.** Explicit matrix entries of the prepared  $|0\rangle\langle 0|$  register. Formally: `registerKetZero.mat i j = if i = 0 ∧ j = 0 then 1 else 0`.

**Proof.** The goal is simplified using the definition of the all-zero register ket, the definition of the unit register 0, the action on a matrix of a single-entry element for Kraus families and standard identities for matrices. Every finite index is checked separately.

#### Lean 4 source `QLambda/Linear/FragmentRuntimeCore.lean`

```
theorem registerKetZero_apply (i j : Fin (CQ.QDim 1)) :
  registerKetZero.mat i j = if i = 0 /\ j = 0 then (1 : ?) else 0 := by
  simp only [registerKetZero, unitRegister0, KrausFamily.applyMat_single,
    Matrix.mul_one]
  -- `ketZero * ketZero?` is the rank-one projector onto basis vector `0`.
  change (Prim.ketZero * Matrix.conjTranspose Prim.ketZero) i j =
    if i = 0 /\ j = 0 then 1 else 0
  simp only [Matrix.mul_apply, Matrix.conjTranspose_apply, Prim.ketZero]
  fin_cases i <|> fin_cases j <|> simp
```

### 5.3.407 One-wire false projector recovers $|0\rangle\langle 0|$

**Statement.** One-wire false projector recovers  $|0\rangle\langle 0|$ . Formally:  $\text{projector } 0 \text{ false } i j = \text{if } i = 0 \wedge j = 0 \text{ then } 1 \text{ else } 0$ .

**Proof.** The goal is simplified using the definition of the computational-basis projector, the definition of the action on a single wire, the definition of the register split and the definition of the  $2 \times 2$  matrix of the projection.

#### Lean 4 source `QLambda/Linear/FragmentRuntimeCore.lean`

```
theorem projector_false_oneWire (i j : Fin (CQ.QDim 1)) :
  Composer.projector (0 : Fin 1) false i j =
    if i = 0 /\ j = 0 then (1 : ?) else 0 := by
  have h00 :
    ((Composer.splitWire (0 : Fin 1)) ((Composer.basisEquiv 1) 0)).1 =
      false := by decide
  have h01 :
    ((Composer.splitWire (0 : Fin 1)) ((Composer.basisEquiv 1) 1)).1 =
      true := by decide
  fin_cases i <|> fin_cases j <|>
  simp [Composer.projector, Composer.onWire, Composer.registerSplit,
    Composer.proj_2, CQ.QDim, h00, h01, Matrix.reindex_apply,
    Matrix.kroneckerMap, Matrix.one_apply]
```

### 5.3.408 One-wire true projector recovers $|1\rangle\langle 1|$

**Statement.** One-wire true projector recovers  $|1\rangle\langle 1|$ . Formally:  $\text{projector } 0 \text{ true } i j = \text{if } i = 1 \wedge j = 1 \text{ then } 1 \text{ else } 0$ .

**Proof.** The goal is simplified using the definition of the computational-basis projector, the definition of the action on a single wire, the definition of the register split and the definition of the  $2 \times 2$  matrix of the projection.

#### Lean 4 source `QLambda/Linear/FragmentRuntimeCore.lean`

```

theorem projector_true_oneWire (i j : Fin (CQ.QDim 1)) :
  Composer.projector (0 : Fin 1) true i j =
    if i = 1 /\ j = 1 then (1 : ?) else 0 := by
have h00 :
  ((Composer.splitWire (0 : Fin 1)) ((Composer.basisEquiv 1) 0)).1 =
    false := by decide
have h01 :
  ((Composer.splitWire (0 : Fin 1)) ((Composer.basisEquiv 1) 1)).1 =
    true := by decide
fin_cases i <|> fin_cases j <|>
simp [Composer.projector, Composer.onWire, Composer.registerSplit,
  Composer.proj_2, CQ.QDim, h00, h01, Matrix.reindex_apply,
  Matrix.kroneckerMap, Matrix.one_apply]

```

### 5.3.409 Trace of the computational-basis projector of the all-zero register ket

**Statement.** For a bit  $b$ : the trace of the product of the computational-basis projector of  $b$  at 0 and the underlying matrix equals if  $b$  then 0 else 1.

**Proof.** By case analysis on the bit  $b$ . For false and true, the claim is checked directly. The key step rewrites with standard identities for matrices, the explicit matrix entries of the prepared  $|0\rangle\langle 0|$  register, the definition of the Hilbert-space dimension and standard identities for finite indices.

#### Lean 4 source `QLambda/Linear/FragmentRuntimeCore.lean`

```

private theorem trace_projector_registerKetZero (b : Bool) :
  Matrix.trace
    (Composer.projector (0 : Fin 1) b * registerKetZero.mat) =
    if b then (0 : ?) else 1 := by
change
  (? i : Fin (CQ.QDim 1),
    (Composer.projector (0 : Fin 1) b * registerKetZero.mat) i i) =
    if b then 0 else 1
simp_rw [Matrix.mul_apply, registerKetZero_apply]
cases b with
| false =>
  -- Reduce `Fin (2^1)` to `Fin 2` and expand both sums.
  simp [CQ.QDim, Fin.sum_univ_two, projector_false_oneWire]
| true =>
  simp [CQ.QDim, Fin.sum_univ_two, projector_true_oneWire]

```

### 5.3.410 Born mass of outcome $b$ on $|0\rangle$ equals 1 iff $b = \text{false}$

**Statement.** Born mass of outcome  $b$  on  $|0\rangle$  equals 1 iff  $b = \text{false}$ . Formally: `Runtime.RegisterState.measureProbability registerKetZero 0 b = if b then 0 else 1`.

**Proof.** The hypotheses are unpacked into their constituent data. The key step rewrites with the action on a matrix of a single-entry element for Kraus families, cyclicity of the trace, the computational-basis projector of a conjugate transpose and associativity of matrix multiplication.

#### Lean 4 source `QLambda/Linear/FragmentRuntimeCore.lean`

```

theorem measureProbability_registerKetZero (b : Bool) :

```



```

Runtime.RegisterState.measureProbability registerKetZero (0 : Fin 1) b =
  if b then (0 : ?) else 1 := by
change
  (Matrix.trace
    (KrausFamily.applyMat
      [Composer.projector (0 : Fin 1) b] registerKetZero.mat)).re =
    if b then 0 else 1
have htrace :
  Matrix.trace
    (KrausFamily.applyMat
      [Composer.projector (0 : Fin 1) b] registerKetZero.mat) =
    Matrix.trace
      (Composer.projector (0 : Fin 1) b * registerKetZero.mat) := by
rw [KrausFamily.applyMat_single,
  Matrix.trace_mul_comm
    (Composer.projector (0 : Fin 1) b * registerKetZero.mat)
    (Matrix.conjTranspose (Composer.projector (0 : Fin 1) b)),
  Composer.projector_conjTranspose, <- Matrix.mul_assoc,
  Composer.projector_mul_self]
rw [htrace, trace_projector_registerKetZero]
cases b <;> simp

```

### 5.3.411 Measurement probability of the all-zero register ket of false

**Statement.** The measurement probability of the all-zero register ket and `false` at 0 equals 1.

**Proof.** The goal is closed by simplification with the defining equations.

**Lean 4 source** [QLambda/Linear/FragmentRuntimeCore.lean](#)

```

theorem measureProbability_registerKetZero_false :
  Runtime.RegisterState.measureProbability registerKetZero (0 : Fin 1) false =
  1 := by
  simp using measureProbability_registerKetZero false

```

### 5.3.412 Measurement probability of the all-zero register ket of true

**Statement.** The measurement probability of the all-zero register ket and `true` at 0 equals 0.

**Proof.** The goal is closed by simplification with the defining equations.

**Lean 4 source** [QLambda/Linear/FragmentRuntimeCore.lean](#)

```

theorem measureProbability_registerKetZero_true :
  Runtime.RegisterState.measureProbability registerKetZero (0 : Fin 1) true =
  0 := by
  simp using measureProbability_registerKetZero true

```

### 5.3.413 N-bounded observable adequacy for closed recursion-free fragment programs

**Statement.** N-bounded observable adequacy for closed recursion-free fragment programs: unit, bit, and measurement-branch observations.

**Proof.** The witness is assembled directly from its components, using the qubit-usage bound of the unit.

### Lean 4 source `QLambda/Linear/FragmentRuntimeN.lean`

```
theorem fragment_observable_adequacy (N : Nat) :
  UsesAtMostQubits N .unit /\
  (forall b, UsesAtMostQubits N (.bitLit b)) /\
  (FragCert.denote FragCert.closed_unit_cert =
    FragmentContext.closedPoint routeAFragmentModel.unitIntro) /\
  (forall b, FragCert.denote (FragCert.closed_bitLit_cert b) =
    FragmentContext.closedPoint (routeAFragmentModel.bitLit b)) /\
  (forall b, routeAFragmentModel.measureBranch b = measureBranchYoneda b) /\
  (forall (q : Nat) (_hq : q <= N) (w : Fin q) (? : Runtime.RegisterState q),
    Runtime.RegisterState.measureProbability ? w false +
    Runtime.RegisterState.measureProbability ? w true = 1) :=
  <usesAtMost_unit N, fun b => usesAtMost_bitLit N b,
  fragment_step_denote_sound_unit _,
  fun _ => fragment_step_denote_sound_bitLit _,
  fragment_measStep_denote_sound_branch,
  fun q _hq w ? => n_bounded_measureProbability_sum q w ?>
```

#### 5.3.414 Measured-program adequacy: closed measurement new 0 program under qubit-usage bound

**Statement.** Measured-program adequacy: closed `measureNew0Program` under `UsesAtMostQubits`, `measureElim` spine, and  $|0\rangle$  Born masses.

**Proof.** The witness is assembled directly from its components, using the monotonicity of qubit-usage bounds.

### Lean 4 source `QLambda/Linear/FragmentRuntimeN.lean`

```
theorem fragment_measured_observable_adequacy (N : Nat) (hN : 1 <= N) :
  UsesAtMostQubits N measureNew0Program /\
  (FragCert.denote closed_measure_new0_cert =
    Hom.comp (FragCert.measureElim _)
      (Hom.comp
        (DayTensor.map
          (FragCert.denote fragCert_app_new0_unit)
          (FragCert.denote fragCert_measure_new0_cont))
        (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil))) /\
  Runtime.RegisterState.measureProbability registerKetZero (0 : Fin 1)
    false = 1 /\
  Runtime.RegisterState.measureProbability registerKetZero (0 : Fin 1)
    true = 0 /\
  (forall b, routeAFragmentModel.measureBranch b = measureBranchYoneda b) :=
  <UsesAtMostQubits.mono hN usesAtMost_measure_new0_cont,
  denote_closed_measure_new0,
  measureProbability_registerKetZero_false,
  measureProbability_registerKetZero_true,
  fragment_measStep_denote_sound_branch>
```

#### 5.3.415 Literal-only corollary retained for earlier citations

**Statement.** Literal-only corollary retained for earlier citations.

**Proof.** The witness is assembled directly from its components, using the qubit-usage bound of the unit.

#### Lean 4 source `QLambda/Linear/FragmentRuntimeN.lean`

```
theorem fragment_observable_adequacy_literals (N : Nat) :
  UsesAtMostQubits N .unit /\
  (forall b, UsesAtMostQubits N (.bitLit b)) /\
  (FragCert.denoteUnit FragCert.closed_unit_cert =
    routeAFragmentModel.unitIntro) /\
  (forall b, FragCert.denoteBitLit (FragCert.closed_bitLit_cert b) =
    routeAFragmentModel.bitLit b) :=
  <usesAtMost_unit N, fun b => usesAtMost_bitLit N b,
  FragCert.denoteUnit_eq _, fun _ => FragCert.denoteBitLit_eq _>
```

### 5.3.416 Quotation types remain in the semantic fragment independently of N

**Statement.** Quotation types remain in the semantic fragment independently of N. Formally: `Ty.SemanticFragment Command.quotationTy`.

**Proof.** This is an instance of the fact that one-wire quotation type is in the fragment.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
theorem n_quotationTy_semanticFragment (_N : Nat) :
  Ty.SemanticFragment Command.quotationTy :=
  quotationTy_semanticFragment
```

### 5.3.417 The n of the general quotation type stays in the semantic fragment

**Statement.** For a natural number `_N`: `Command.GeneralQuotation.quotationTy` lies in the semantic fragment.

**Proof.** This is an instance of the fact that two-wire quotation type is in the fragment.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
theorem n_generalQuotationTy_semanticFragment (_N : Nat) :
  Ty.SemanticFragment Command.GeneralQuotation.quotationTy :=
  generalQuotationTy_semanticFragment
```

### 5.3.418 Classical quotation expressions inherit fragment binder discipline from their current classical slot

**Statement.** Classical quotation expressions inherit fragment binder discipline from their current classical slot. Formally: `FragCert.FragmentBinders (Command.quoteCExpr current e)`.

**Proof.** By induction on `e`. The case of a lit is immediate; for a bit, the claim is checked directly; for a not, an and, an or and a xor, the claim follows from the induction hypothesis. It follows from the hypothesis that `FragCert.FragmentBinders current`.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

theorem quoteCEExpr_fragmentBinders (current : Term)
  (hc : FragCert.FragmentBinders current) :
  forall e : Composer.CExpr 1, FragCert.FragmentBinders (Command.quoteCEExpr current
    e) := by
  intro e
  induction e with
  | lit _ => trivial
  | bit _ => exact hc
  | not e ih =>
    exact <ih, trivial, trivial>
  | and _ _ ih_1 ih_2 =>
    exact <ih_1, ih_2, trivial>
  | or _ _ ih_1 ih_2 =>
    exact <ih_1, trivial, ih_2>
  | xor _ _ ih_1 ih_2 =>
    exact <ih_1, <ih_2, trivial, trivial>, ih_2>

```

### 5.3.419 Continuations that preserve fragment binders

**Definition.** Continuations that preserve fragment binders.

**Construction.** Defined to be  $\forall t, \text{FragCert.FragmentBinders } t \rightarrow \text{FragCert.FragmentBinders } (k \ t)$ .

**Lean 4 source** [QLambda/Linear/FragmentSourceCircuitN.lean](#)

```

def ContinuationFragmentBinders (k : Term -> Term) : Prop :=
  forall t, FragCert.FragmentBinders t -> FragCert.FragmentBinders (k t)

```

### 5.3.420 CPS quotation bodies stay inside fragment binders

**Statement.** CPS quotation bodies stay inside `FragCert.FragmentBinders`. Formally: `FragCert.FragmentBinders (Command.quoteBody C current k)`.

**Proof.** By induction on the derivation that `C` is quotable. For a skip, the Pauli-X gate, the Hadamard gate, the T gate, a Y-rotation, a measurement, reset and a store, the claim is checked directly; for a sequential composition and a branch, the claim follows from the induction hypothesis. It follows from the hypothesis that `ContinuationFragmentBinders k`.

**Lean 4 source** [QLambda/Linear/FragmentSourceCircuitN.lean](#)

```

theorem quoteBody_fragmentBinders {C : Command 1 1} (hc : C.Quotable)
  {current : Term} {k : Term -> Term}
  (hc : FragCert.FragmentBinders current)
  (hk : ContinuationFragmentBinders k) :
  FragCert.FragmentBinders (Command.quoteBody C current k) := by
  induction hc generalizing current k with
  | skip =>
    exact hk current hc
  | x =>
    refine <<Ty.FirstOrder.qubit, hk current hc>, ?_>
    change True /\ True
    exact <trivial, trivial>
  | h =>

```

```

    refine <<Ty.FirstOrder.qubit, hk current hc>, ?_>
    change True /\ True
    exact <trivial, trivial>
| t =>
    refine <<Ty.FirstOrder.qubit, hk current hc>, ?_>
    change True /\ True
    exact <trivial, trivial>
| ry =>
    refine <<Ty.FirstOrder.qubit, hk current hc>, ?_>
    change True /\ True
    exact <trivial, trivial>
| measure =>
    refine <trivial, <rfl, <Ty.FirstOrder.qubit, ?_>>>
    exact hk (.var .unres 0) trivial
| reset =>
    refine <<Ty.FirstOrder.qubit, hk current hc>, ?_>
    change True /\ True
    exact <trivial, trivial>
| store =>
    exact hk _ (quoteCEExpr_fragmentBinders current hc _)
| seq _ _ ihA ihB =>
    exact ihA hc (fun t ht => ihB ht hk)
| branch _ _ ihy ihn =>
    exact <quoteCEExpr_fragmentBinders current hc _,
      ihy hc hk, ihn hc hk>

```

### 5.3.421 Canonical quotations obey fragment binder discipline

**Statement.** Canonical quotations obey fragment binder discipline. Formally: `FragCert.FragmentBinders C.quote`.

**Proof.** Each component of the claim is established separately. It follows from the definition of the quotation and the CPS quotation bodies stay inside fragment binders.

**Lean 4 source** [QLambda/Linear/FragmentSourceCircuitN.lean](#)

```

theorem quote_fragmentBinders {C : Command 1 1} (hC : C.Quotable) :
  FragCert.FragmentBinders C.quote := by
  unfold Command.quote
  refine <rfl, <Ty.FirstOrder.qubit, ?_>>
  exact quoteBody_fragmentBinders hC trivial fun t ht => <trivial, ht>

```

### 5.3.422 Every quotable one-wire command has a closed fragment certificate for its canonical quotation

**Statement.** Every quotable one-wire command has a closed fragment certificate for its canonical quotation. Formally: `Nonempty (FragCert.Closed C.quote Command.quotationTy)`.

**Proof.** The witness is assembled directly from its components, using the definition of the passage from a typing judgement.

**Lean 4 source** [QLambda/Linear/FragmentSourceCircuitN.lean](#)

```

theorem fragment_quote_has_fragCert {C : Command 1 1} (hC : C.Quotable) :
  Nonempty (FragCert.Closed C.quote Command.quotationTy) :=
  <FragCert.ofHasType
    (FragCert.fragmentJudgment_of_hasType (Command.quote_typed hC)
      CtxUAllBit.nil CtxLAllSomeFragment.nil
      (quote_fragmentBinders hC) quotationTy_semanticFragment)>

```

### 5.3.423 Fragment of the quotation of the has of the fragment certificate of the skip

**Statement.** The closed term of the quotation and the quotation type is inhabited. Formally: `Nonempty (FragCert.Closed Command.skip.quote Command.quotationTy)`.

**Proof.** This is an instance of the fact that every quotable one-wire command has a closed fragment certificate for its canonical quotation, applied to the definition of the skip.

**Lean 4 source** [QLambda/Linear/FragmentSourceCircuitN.lean](#)

```

theorem fragment_quote_has_fragCert_skip :
  Nonempty (FragCert.Closed Command.skip.quote Command.quotationTy) :=
  fragment_quote_has_fragCert .skip

```

### 5.3.424 Fragment of the quotation of the has of the fragment certificate of the Pauli-X gate

**Statement.** For an index  $w$ : the closed term of `(Command.x w).quote` and the quotation type is inhabited.

**Proof.** This is an instance of the fact that every quotable one-wire command has a closed fragment certificate for its canonical quotation, applied to the definition of the Pauli-X gate.

**Lean 4 source** [QLambda/Linear/FragmentSourceCircuitN.lean](#)

```

theorem fragment_quote_has_fragCert_x {w : Fin 1} :
  Nonempty (FragCert.Closed (Command.x w).quote Command.quotationTy) :=
  fragment_quote_has_fragCert .x

```

### 5.3.425 Fragment of the quotation of the has of the fragment certificate of the Hadamard gate

**Statement.** For an index  $w$ : the closed term of `(Command.h w).quote` and the quotation type is inhabited.

**Proof.** This is an instance of the fact that every quotable one-wire command has a closed fragment certificate for its canonical quotation, applied to the definition of the Hadamard gate.

**Lean 4 source** [QLambda/Linear/FragmentSourceCircuitN.lean](#)

```

theorem fragment_quote_has_fragCert_h {w : Fin 1} :
  Nonempty (FragCert.Closed (Command.h w).quote Command.quotationTy) :=
  fragment_quote_has_fragCert .h

```

```

/-! ## Hom-side bridge foothold (skip / gate spines) -/

```

### 5.3.426 Hom-side bridge foothold (skip / gate spines)

**Statement.** ## Hom-side bridge foothold (skip / gate spines). Formally: `Ty.Admissible .bit`.

**Proof.** The claim is a finite computation and is checked by evaluating it.

**Lean 4 source** `QLambda/Linear/FragmentSourceCircuitN.lean`

```
private theorem quote_bit_admissible : Ty.Admissible .bit := by
  decide
```

### 5.3.427 Admissibility of the quotation of the qubit

**Statement.** `.qubit` is admissible. Formally: `Ty.Admissible .qubit`.

**Proof.** The claim is a finite computation and is checked by evaluating it.

**Lean 4 source** `QLambda/Linear/FragmentSourceCircuitN.lean`

```
private theorem quote_qubit_admissible : Ty.Admissible .qubit := by
  decide
```

### 5.3.428 Duplicability of the quotation of the bit

**Statement.** `Ty.Duplicable .bit`. Formally: `Ty.Duplicable .bit`.

**Proof.** The claim is a finite computation and is checked by evaluating it.

**Lean 4 source** `QLambda/Linear/FragmentSourceCircuitN.lean`

```
private theorem quote_bit_duplicable : Ty.Duplicable .bit := by
  decide
```

### 5.3.429 Quotation of the unrestricted context of the bit

**Statement.** Every unrestricted variable of `[.bit]` has bit type. Formally: `CtxUAllBit [.bit]`.

**Proof.** This is an instance of the extended list for all-bit unrestricted contexts, applied to the empty list for all-bit unrestricted contexts.

**Lean 4 source** `QLambda/Linear/FragmentSourceCircuitN.lean`

```
private theorem quote_ctxU_bit : CtxUAllBit [.bit] :=
  CtxUAllBit.cons CtxUAllBit.nil
```

### 5.3.430 Quotation of the linear context of the live 0

**Statement.** Every cell of the linear context `[some .qubit]` is occupied by a fragment type.

**Proof.** This is an instance of the extended list of an occupied cell for fully occupied fragment linear contexts, applied to the qubit for semantic fragments and the empty list for fully occupied fragment linear contexts.

**Lean 4 source** `QLambda/Linear/FragmentSourceCircuitN.lean`

```
private theorem quote_ctxL_live0 :
  CtxLAllSomeFragment [some (.qubit : Ty)] :=
  CtxLAllSomeFragment.cons_some Ty.SemanticFragment.qubit
  CtxLAllSomeFragment.nil
```

### 5.3.431 Quotation of the linear context of an absent cell

**Statement.** Every cell of the linear context `[none]` is occupied by a fragment type.

**Proof.** This is an instance of the extended list of an absent cell for fully occupied fragment linear contexts, applied to the empty list for fully occupied fragment linear contexts.

**Lean 4 source** [QLambda/Linear/FragmentSourceCircuitN.lean](#)

```
private theorem quote_ctxL_none :
  CtxLAllSomeFragment [none] :=
  CtxLAllSomeFragment.cons_none CtxLAllSomeFragment.nil
```

### 5.3.432 Linear qubit variable in the skip-quote pair body

**Definition.** Linear qubit variable in the skip-quote pair body.

**Construction.** Defined by an explicit formula built from the quotation context unrestricted bit, the quotation context linear live 0, the zero and the single-cell usage mask.

**Lean 4 source** [QLambda/Linear/FragmentSourceCircuitN.lean](#)

```
noncomputable def fragCert_skip_varL :
  FragCert [.bit] [some .qubit] (.var .lin 0) .qubit :=
  .varL quote_ctxU_bit quote_ctxL_live0 Lookup.zero
  (by simp [OnlySomeAt, AllNone]) Ty.SemanticFragment.qubit
```

### 5.3.433 Unrestricted classical slot in the skip-quote pair body

**Definition.** Unrestricted classical slot in the skip-quote pair body.

**Construction.** Defined by an explicit formula built from the quotation context unrestricted bit, the quotation context linear none, the zero and the quotation bit duplicability.

**Lean 4 source** [QLambda/Linear/FragmentSourceCircuitN.lean](#)

```
noncomputable def fragCert_skip_varU :
  FragCert [.bit] [none] (.var .unres 0) .bit :=
  .varU quote_ctxU_bit quote_ctxL_none Lookup.zero quote_bit_duplicable
  (by simp [AllNone]) Ty.SemanticFragment.bit
```

### 5.3.434 Pair body linear variable of 0 of quotation

**Definition.** Pair body `(varL 0, varU 0)` of `Command.skip.quote`.

**Construction.** Defined by an explicit formula built from the quotation context unrestricted bit, the quotation context linear live 0, the empty list and the qubit.



### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
noncomputable def fragCert_skip_pair :
  FragCert [.bit] [some .qubit]
  (.pair (.var .lin 0) (.var .unres 0))
  (.tensor .qubit .bit) :=
.pair quote_ctxU_bit quote_ctxL_live0 (OSplit.left OSplit.nil)
Ty.FirstOrder.qubit Ty.FirstOrder.bit
fragCert_skip_varL fragCert_skip_varU
```

#### 5.3.435 Inner linear abstraction of quotation

**Definition.** Inner linear abstraction of `Command.skip.quote`.

**Construction.** Defined by an explicit formula built from the quotation context unrestricted bit, the empty list, the quotation qubit admissibility and the qubit.

### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
noncomputable def fragCert_skip_lamL :
  FragCert [.bit] []
  (.lam .lin .qubit (.pair (.var .lin 0) (.var .unres 0)))
  (.arrow .lin .qubit (.tensor .qubit .bit)) :=
.lamL quote_ctxU_bit CtxLAllSomeFragment.nil quote_qubit_admissible
Ty.FirstOrder.qubit
(Ty.SemanticFragment.tensor Ty.FirstOrder.qubit Ty.FirstOrder.bit)
fragCert_skip_pair
```

#### 5.3.436 Hand-built closed fragment certificate for quotation (preferred over passage from a typing judgement)

**Definition.** Hand-built closed `FragCert` for `Command.skip.quote` (preferred over `ofHasType`).

**Construction.** Defined by an explicit formula built from the empty list, the quotation bit admissibility, the quotation bit duplicability and the empty usage mask.

### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
noncomputable def fragCert_skip_quote :
  FragCert.Closed Command.skip.quote Command.quotationTy :=
.lamU CtxUAllBit.nil CtxLAllSomeFragment.nil quote_bit_admissible
quote_bit_duplicable (by simp [AllNone]) quotationTy_semanticFragment
fragCert_skip_lamL
```

#### 5.3.437 Day curry / tensor product introduction / lookup spine matching quotation

**Definition.** Day curry / tensorIntro / lookup spine matching `Command.skip.quote`.

**Construction.** Defined to be the denotation of the fragment certificate skip quotation.

### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

noncomputable def quoteSkipSpine :
  Hom (FragmentContext.combined [] [])
    (fragmentModule Command.quotationTy) :=
  FragCert.denote fragCert_skip_quote

```

### 5.3.438 Explicit Day expansion of quoted skip spine through curry / pair / lookup

**Statement.** Explicit Day expansion of `quoteSkipSpine` through `curry / pair / lookup`.

**Proof.** The goal is simplified using the definition of the empty usage mask, the definition of the quoted skip spine, the definition of the fragment certificate skip quotation and the definition of the fragment certificate skip lambda linear.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

theorem quoteSkipSpine_eq :
  quoteSkipSpine =
    FragmentContext.abstractUnrestricted
      (FragmentContext.abstractLinear Ty.FirstOrder.qubit
        (Hom.comp
          (FragmentContext.tensorIntro Ty.FirstOrder.qubit Ty.FirstOrder.bit)
          (Hom.comp
            (DayTensor.map
              (FragCert.denote fragCert_skip_varL)
              (FragCert.denote fragCert_skip_varU))
            (FragmentContext.combinedOSplit quote_ctxU_bit
              (OSplit.left OSplit.nil)))))) := by
  have hU :=
    FragCert.denote_lamU_eq CtxUAllBit.nil CtxLAllSomeFragment.nil
      quote_bit_admissible quote_bit_duplicable (by simp [AllNone])
      quotationTy_semanticFragment fragCert_skip_lamL
  have hL :=
    FragCert.denote_lamL_eq quote_ctxU_bit CtxLAllSomeFragment.nil
      quote_qubit_admissible Ty.FirstOrder.qubit
      (Ty.SemanticFragment.tensor Ty.FirstOrder.qubit Ty.FirstOrder.bit)
      fragCert_skip_pair
  have hP :=
    FragCert.denote_pair_eq quote_ctxU_bit quote_ctxL_live0
      (OSplit.left OSplit.nil) Ty.FirstOrder.qubit Ty.FirstOrder.bit
      fragCert_skip_varL fragCert_skip_varU
  simp only [quoteSkipSpine, fragCert_skip_quote, fragCert_skip_lamL,
    fragCert_skip_pair]
  exact hU.trans <| congrArg _ <| hL.trans <| congrArg _ hP

```

### 5.3.439 The hand-built skip certificate denotes as quoted skip spine

**Statement.** The hand-built skip certificate denotes as `quoteSkipSpine`. Formally: `FragCert.denote fragCert_skip_quote = quoteSkipSpine`.

**Proof.** By definition. Unfolding the denotation turns the left-hand side, the denotation of the fragment certificate skip quotation, into the right-hand side, the quoted skip spine; the two sides are the same term.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

theorem fragCert_skip_quote_denote :
  FragCert.denote fragCert_skip_quote = quoteSkipSpine :=
  rfl

```

### 5.3.440 Fragment certificate of the skip of the quotation of the denotation of the independent

**Statement.** Any closed certificate for `Command.skip.quote` denotes as the skip spine (via the hand-built certificate and proof-witness independence of `denote`). Formally: `FragCert.denote c = quoteSkipSpine`.

**Proof.** By case analysis on `c`. For an unrestricted lambda abstraction, the claim is checked directly. The goal is simplified using the definition of the fragment certificate skip quotation, the definition of the fragment certificate skip lambda linear, the definition of the fragment certificate skip pair and the definition of the fragment certificate skip variable linear.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

theorem fragCert_skip_quote_denote_independent
  (c : FragCert.Closed Command.skip.quote Command.quotationTy) :
  FragCert.denote c = quoteSkipSpine := by
  refine Eq.trans ?_ fragCert_skip_quote_denote
  -- Match the unique constructor spine of `Command.skip.quote`.
  cases c with
  | lamU hGamma hDelta hAd hDup hN hArr cLam =>
    cases cLam with
    | lamL hGamma' hDelta' hAd' hFO hB cPair =>
      cases cPair with
      | pair hGammap hDeltap hs hA hB' cL cR =>
        cases hs with
        | left hs0 =>
          cases hs0
          cases cL with
          | varL hGammaL hDeltaL h1 ho hAq =>
            cases cR with
            | varU hGammaR hDeltaR h1U hDupU hNone hAb =>
              simp only [fragCert_skip_quote, fragCert_skip_lamL,
                fragCert_skip_pair, fragCert_skip_varL, fragCert_skip_varU]
              congr
        | right hs0 =>
          cases hs0
          cases cL with
          | varL _ _ h1 _ _ => cases h1

```

### 5.3.441 Thin CQ-side interpret for skip: compilation is empty, so denotation is skip

**Statement.** Thin CQ-side interpret for skip: compilation is empty, so denotation is `CQ.skip`. Formally: `Command.skip.denote model = skip`.

**Proof.** By definition. Unfolding the denotation turns the left-hand side, the denotation of `model`, into the right-hand side, `skip`; the two sides are the same term.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

theorem command_skip_denote_eq_CQ_skip {q c : Nat}
  (model : Composer.Model q c) :
  Command.skip.denote model = CQ.skip :=
  rfl

/-! ### Gate-quote spines (`x` / `h`) -/

```

### 5.3.442 Gate-quote spines ( $x / h$ )

**Statement.** ### Gate-quote spines ( $x / h$ ). Formally: `CtxLAllSomeFragment [some .qubit, none]`.

**Proof.** This is an instance of the extended list of an occupied cell for fully occupied fragment linear contexts, applied to the qubit for semantic fragments and the quotation of the linear context of an absent cell.

**Lean 4 source** [QLambda/Linear/FragmentSourceCircuitN.lean](#)

```

private theorem quote_ctxL_live_none :
  CtxLAllSomeFragment [some (.qubit : Ty), none] :=
  CtxLAllSomeFragment.cons_some Ty.SemanticFragment.qubit quote_ctxL_none

```

### 5.3.443 Quotation of the linear context of an absent cell of an absent cell

**Statement.** Every cell of the linear context `[none, none]` is occupied by a fragment type.

**Proof.** This is an instance of the extended list of an absent cell for fully occupied fragment linear contexts, applied to the quotation of the linear context of an absent cell.

**Lean 4 source** [QLambda/Linear/FragmentSourceCircuitN.lean](#)

```

private theorem quote_ctxL_none_none :
  CtxLAllSomeFragment [none, none] :=
  CtxLAllSomeFragment.cons_none quote_ctxL_none

```

### 5.3.444 Shared pair body of gate quotations after the post-gate linear binder

**Definition.** Shared pair body of gate quotations after the post-gate linear binder.

**Construction.** Defined by an explicit formula built from the quotation context unrestricted bit, the quotation context linear live none, the empty list and the qubit.

**Lean 4 source** [QLambda/Linear/FragmentSourceCircuitN.lean](#)

```

noncomputable def fragCert_gate_pair_body :
  FragCert [.bit] [some .qubit, none]
  (.pair (.var .lin 0) (.var .unres 0))
  (.tensor .qubit .bit) :=
  .pair quote_ctxU_bit quote_ctxL_live_none
  (OSplit.left (OSplit.none OSplit.nil))
  Ty.FirstOrder.qubit Ty.FirstOrder.bit
  (.varL quote_ctxU_bit quote_ctxL_live_none Lookup.zero
    (by simp [OnlySomeAt, AllNone]) Ty.SemanticFragment.qubit)

```

```
(.varU quote_ctxU_bit quote_ctxL_none_none Lookup.zero quote_bit_duplicable
  (by simp [AllNone]) Ty.SemanticFragment.bit)
```

### 5.3.445 Definition of the fragment certificate of the gate of the continuation

**Definition.** Continuation  $\lambda q. (q, \text{classical})$  used by gate quotations.

**Construction.** Defined by an explicit formula built from the quotation context unrestricted bit, the quotation context linear none, the quotation qubit admissibility and the qubit.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
noncomputable def fragCert_gate_cont :
  FragCert [.bit] [none]
    (.lam .lin .qubit (.pair (.var .lin 0) (.var .unres 0)))
    (.arrow .lin .qubit (.tensor .qubit .bit)) :=
.lamL quote_ctxU_bit quote_ctxL_none quote_qubit_admissible
  Ty.FirstOrder.qubit
  (Ty.SemanticFragment.tensor Ty.FirstOrder.qubit Ty.FirstOrder.bit)
  fragCert_gate_pair_body
```

### 5.3.446 Closed prim certificate transported to the qubit-arrow type

**Definition.** Closed prim certificate transported to the qubit-arrow type.

**Construction.** Constructed interactively; the goal is simplified using the definition of the empty usage mask and the hypothesis that  $\text{primTy } p = \text{.arrow .lin .qubit .qubit}$ .

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
noncomputable def fragCert_gate_prim (p : Prim)
  (hp : primTy p = .arrow .lin .qubit .qubit) :
  FragCert [.bit] [none] (.prim p) (.arrow .lin .qubit .qubit) := by
have c : FragCert [.bit] [none] (.prim p) (primTy p) :=
  .prim quote_ctxU_bit quote_ctxL_none p (by simp [AllNone])
exact hp |> c
```

### 5.3.447 Argument wire linear variable of 0 for a gate application

**Definition.** Argument wire  $\text{varL } 0$  for a gate application.

**Construction.** Defined by an explicit formula built from the quotation context unrestricted bit, the quotation context linear live 0, the zero and the single-cell usage mask.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
noncomputable def fragCert_gate_wire :
  FragCert [.bit] [some .qubit] (.var .lin 0) .qubit :=
.varL quote_ctxU_bit quote_ctxL_live0 Lookup.zero
  (by simp [OnlySomeAt, AllNone]) Ty.SemanticFragment.qubit
```

### 5.3.448 Argument primitive of $p$ and 0 for a qubit-to-qubit gate primitive

**Definition.** Argument  $\text{prim } p \cdot \text{varL } 0$  for a qubit-to-qubit gate primitive.

**Construction.** Defined by an explicit formula built from the quotation context unrestricted bit, the quotation context linear live 0, the empty list and the qubit.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
noncomputable def fragCert_gate_arg (p : Prim)
  (hp : primTy p = .arrow .lin .qubit .qubit) :
  FragCert [.bit] [some .qubit]
  (.app (.prim p) (.var .lin 0)) .qubit :=
.appL quote_ctxU_bit quote_ctxL_live0 (OSplit.right OSplit.nil)
  Ty.FirstOrder.qubit Ty.SemanticFragment.qubit
  (fragCert_gate_prim p hp) fragCert_gate_wire
```

### 5.3.449 Definition of the fragment certificate of the gate of the body

**Definition.** Gate quotation body  $\text{app } (\lambda q. (q, c)) (p \cdot \text{wire})$ .

**Construction.** Defined by an explicit formula built from the quotation context unrestricted bit, the quotation context linear live 0, the empty list and the qubit.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
noncomputable def fragCert_gate_body (p : Prim)
  (hp : primTy p = .arrow .lin .qubit .qubit) :
  FragCert [.bit] [some .qubit]
  (.app (.lam .lin .qubit (.pair (.var .lin 0) (.var .unres 0)))
    (.app (.prim p) (.var .lin 0)))
  (.tensor .qubit .bit) :=
.appL quote_ctxU_bit quote_ctxL_live0 (OSplit.right OSplit.nil)
  Ty.FirstOrder.qubit
  (Ty.SemanticFragment.tensor Ty.FirstOrder.qubit Ty.FirstOrder.bit)
  fragCert_gate_cont (fragCert_gate_arg p hp)
```

### 5.3.450 Inner linear abstraction of a gate quotation

**Definition.** Inner linear abstraction of a gate quotation.

**Construction.** Defined by an explicit formula built from the quotation context unrestricted bit, the empty list, the quotation qubit admissibility and the qubit.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
noncomputable def fragCert_gate_lamL (p : Prim)
  (hp : primTy p = .arrow .lin .qubit .qubit) :
  FragCert [.bit] []
  (.lam .lin .qubit
    (.app (.lam .lin .qubit (.pair (.var .lin 0) (.var .unres 0)))
      (.app (.prim p) (.var .lin 0))))
  (.arrow .lin .qubit (.tensor .qubit .bit)) :=
.lamL quote_ctxU_bit CtxLAllSomeFragment.nil quote_qubit_admissible
  Ty.FirstOrder.qubit
```

```
(Ty.SemanticFragment.tensor Ty.FirstOrder.qubit Ty.FirstOrder.bit)
(fragCert_gate_body p hp)
```

### 5.3.451 Definition of the fragment certificate of the Pauli-X gate of the quotation

**Definition.** Hand-built closed `FragCert` for `(Command.x w).quote`.

**Construction.** Defined by an explicit formula built from the empty list, the quotation bit admissibility, the quotation bit duplicability and the empty usage mask.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
noncomputable def fragCert_x_quote (w : Fin 1) :
  FragCert.Closed (Command.x w).quote Command.quotationTy :=
  .lamU CtxUAllBit.nil CtxLAllSomeFragment.nil quote_bit_admissible
  quote_bit_duplicable (by simp [AllNone]) quotationTy_semanticFragment
  (fragCert_gate_lamL .x rfl)
```

### 5.3.452 Definition of the fragment certificate of the Hadamard gate of the quotation

**Definition.** Hand-built closed `FragCert` for `(Command.h w).quote`.

**Construction.** Defined by an explicit formula built from the empty list, the quotation bit admissibility, the quotation bit duplicability and the empty usage mask.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
noncomputable def fragCert_h_quote (w : Fin 1) :
  FragCert.Closed (Command.h w).quote Command.quotationTy :=
  .lamU CtxUAllBit.nil CtxLAllSomeFragment.nil quote_bit_admissible
  quote_bit_duplicable (by simp [AllNone]) quotationTy_semanticFragment
  (fragCert_gate_lamL .h rfl)
```

### 5.3.453 Day spine for a qubit gate quotation

**Definition.** Day spine for a qubit gate quotation: outer curry around the gate body (whose prim leaf is `denotePrimPoint`, hence `yonedamap (Prim.superoperator p)` after Route A agreement).

**Construction.** Defined by an explicit formula built from the denotation, the empty list, the quotation bit admissibility and the quotation bit duplicability.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
noncomputable def quoteGateSpine (p : Prim)
  (hp : primTy p = .arrow .lin .qubit .qubit) :
  Hom (FragmentContext.combined [] [])
  (fragmentModule Command.quotationTy) :=
  FragCert.denote
  (.lamU CtxUAllBit.nil CtxLAllSomeFragment.nil quote_bit_admissible
  quote_bit_duplicable (by simp [AllNone]) quotationTy_semanticFragment
  (fragCert_gate_lamL p hp))
```

### 5.3.454 Denotation of the fragment certificate of the Pauli-X gate of the quotation

**Statement.** For an index  $w$ : the denotation of the fragment certificate  $x$  quotation of  $w$  equals the quoted gate spine of the Pauli-X gate and `rfl`.

**Proof.** By definition. Unfolding the denotation turns the left-hand side, the denotation of the fragment certificate  $x$  quotation of  $w$ , into the right-hand side, the quoted gate spine of the Pauli-X gate and `rfl`; the two sides are the same term.

**Lean 4 source** `QLambda/Linear/FragmentSourceCircuitN.lean`

```
theorem fragCert_x_quote_denote (w : Fin 1) :  
  FragCert.denote (fragCert_x_quote w) = quoteGateSpine .x rfl :=  
  rfl
```

### 5.3.455 Denotation of the fragment certificate of the Hadamard gate of the quotation

**Statement.** For an index  $w$ : the denotation of the fragment certificate  $h$  quotation of  $w$  equals the quoted gate spine of the Hadamard gate and `rfl`.

**Proof.** By definition. Unfolding the denotation turns the left-hand side, the denotation of the fragment certificate  $h$  quotation of  $w$ , into the right-hand side, the quoted gate spine of the Hadamard gate and `rfl`; the two sides are the same term.

**Lean 4 source** `QLambda/Linear/FragmentSourceCircuitN.lean`

```
theorem fragCert_h_quote_denote (w : Fin 1) :  
  FragCert.denote (fragCert_h_quote w) = quoteGateSpine .h rfl :=  
  rfl
```

### 5.3.456 Fragment certificate of the Pauli-X gate of the quotation of the denotation of the independent

**Statement.** Any closed certificate for  $(\text{Command.x } w).quote$  denotes as the  $x$  gate spine: the certificate spine is forced by the quoted term, so `denote` does not depend on the certificate witness. Formally: `FragCert.denote c = quoteGateSpine .x rfl`.

**Proof.** By case analysis on  $c$ . For an unrestricted lambda abstraction, the claim is checked directly. The goal is simplified using the definition of the fragment certificate  $x$  quotation, the definition of the fragment certificate gate lambda linear, the definition of the fragment certificate gate body and the definition of the fragment certificate gate continuation.

**Lean 4 source** `QLambda/Linear/FragmentSourceCircuitN.lean`

```
theorem fragCert_x_quote_denote_independent (w : Fin 1)  
  (c : FragCert.Closed (Command.x w).quote Command.quotationTy) :  
  FragCert.denote c = quoteGateSpine .x rfl := by  
  refine Eq.trans ?_ (fragCert_x_quote_denote w)  
  cases c with  
  | lamU hGamma hDelta hAd hDup hN hArr cLam =>  
    cases cLam with  
    | lamL hGamma' hDelta' hAd' hFO hB cBody =>  
      cases cBody with  
      | appL hGammab hDeltab hs hA hBb cF cX =>
```



```

cases hs with
| left hs0 =>
  -- The gate argument would need a live wire in an exhausted slot.
  cases hs0
  cases cX with
  | appL _ _ hs' _ _ _ cW =>
    cases hs' with
    | none hsl =>
      cases hsl
      cases cW with
      | varL _ _ hl _ _ => cases hl
  | appU _ _ hs' _ _ _ cW =>
    cases hs' with
    | none hsl =>
      cases hsl
      cases cW with
      | varL _ _ hl _ _ => cases hl
| right hs0 =>
  cases hs0
  cases cF with
  | lamL hGammac hDeltac hAdc hFOc hBc cPair =>
    cases cPair with
    | pair hGammap hDeltap hsp hAp hBp cL cR =>
      cases hsp with
      | left hsp0 =>
        cases hsp0 with
        | none hsp1 =>
          cases hsp1
          cases cL with
          | varL _ _ hlL _ _ =>
            cases cR with
            | varU _ _ hlU _ _ _ =>
              cases cX with
              | appL _ _ hsx _ _ cP cW =>
                cases hsx with
                | left hsx0 =>
                  cases hsx0
                  cases cW with
                  | varL _ _ hlW _ _ => cases hlW
                | right hsx0 =>
                  cases hsx0
                  cases cP with
                  | prim _ _ _ _ =>
                    cases cW with
                    | varL _ _ hlW _ _ =>
                      simp only [fragCert_x_quote,
                                fragCert_gate_lamL,
                                fragCert_gate_body,
                                fragCert_gate_cont,
                                fragCert_gate_pair_body,
                                fragCert_gate_arg,
                                fragCert_gate_prim,
                                fragCert_gate_wire]
                      congr
                  | appU _ _ hsx _ _ cP cW =>
                    cases cP

```

```

      | right hsp0 =>
        cases hsp0 with
        | none hsp1 =>
          cases hsp1
          cases cL with
          | varL _ _ h1L _ _ => cases h1L
| appU hGammab hDeltab hs hNX hBb cF cX =>
cases cF

```

### 5.3.457 Fragment certificate of the Hadamard gate of the quotation of the denotation of the independent

**Statement.** Any closed certificate for  $(\text{Command.h } w).quote$  denotes as the  $h$  gate spine. Formally:  $\text{FragCert.denote } c = \text{quoteGateSpine } .h \text{ rfl}$ .

**Proof.** By case analysis on  $c$ . For an unrestricted lambda abstraction, the claim is checked directly. The goal is simplified using the definition of the fragment certificate  $h$  quotation, the definition of the fragment certificate gate lambda linear, the definition of the fragment certificate gate body and the definition of the fragment certificate gate continuation.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

theorem fragCert_h_quote_denote_independent (w : Fin 1)
  (c : FragCert.Closed (Command.h w).quote Command.quotationTy) :
  FragCert.denote c = quoteGateSpine .h rfl := by
  refine Eq.trans ?_ (fragCert_h_quote_denote w)
  cases c with
  | lamU hGamma hDelta hAd hDup hN hArr cLam =>
    cases cLam with
    | lamL hGamma' hDelta' hAd' hFO hB cBody =>
      cases cBody with
      | appL hGammab hDeltab hs hA hBb cF cX =>
        cases hs with
        | left hs0 =>
          cases hs0
          cases cX with
          | appL _ _ hs' _ _ cW =>
            cases hs' with
            | none hsl =>
              cases hsl
              cases cW with
              | varL _ _ h1 _ _ => cases h1
          | appU _ _ hs' _ _ cW =>
            cases hs' with
            | none hsl =>
              cases hsl
              cases cW with
              | varL _ _ h1 _ _ => cases h1
        | right hs0 =>
          cases hs0
          cases cF with
          | lamL hGammac hDeltac hAdc hFOc hBc cPair =>
            cases cPair with
            | pair hGammap hDeltap hsp hAp hBp cL cR =>

```

```

cases hsp with
| left hsp0 =>
  cases hsp0 with
  | none hsp1 =>
    cases hsp1
    cases cL with
    | varL _ _ h1L _ _ =>
      cases cR with
      | varU _ _ h1U _ _ =>
        cases cX with
        | appL _ _ hsx _ _ cP cW =>
          cases hsx with
          | left hsx0 =>
            cases hsx0
            cases cW with
            | varL _ _ h1W _ _ => cases h1W
          | right hsx0 =>
            cases hsx0
            cases cP with
            | prim _ _ _ =>
              cases cW with
              | varL _ _ h1W _ _ =>
                simp only [fragCert_h_quote,
                  fragCert_gate_lamL,
                  fragCert_gate_body,
                  fragCert_gate_cont,
                  fragCert_gate_pair_body,
                  fragCert_gate_arg,
                  fragCert_gate_prim,
                  fragCert_gate_wire]
                congr
            | appU _ _ hsx _ _ cP cW =>
              cases cP
          | right hsp0 =>
            cases hsp0 with
            | none hsp1 =>
              cases hsp1
              cases cL with
              | varL _ _ h1L _ _ => cases h1L
        | appU hGammab hDeltab hs hNX hBb cF cX =>
          cases cF

```

### 5.3.458 Gate-body spine expands through FO eval of the continuation against the primitive super-operator Yoneda point

**Statement.** Gate-body spine expands through FO eval of the continuation against the `Prim.superoperator` Yoneda point.

**Proof.** This is an instance of the formula for the denotation of the linear application, applied to the quotation of the unrestricted context of the bit, the quotation of the linear context of the live 0, the definition of the qubit, the definition of the tensor product and the definition of the fragment certificate gate continuation.

**Lean 4 source** [QLambda/Linear/FragmentSourceCircuitN.lean](#)

```

theorem quoteGateSpine_body_eq (p : Prim)
  (hp : primTy p = .arrow .lin .qubit .qubit) :
  FragCert.denote (fragCert_gate_body p hp) =
    Hom.comp (FragmentContext.evalFragmentFirstOrder Ty.FirstOrder.qubit _)
      (Hom.comp
        (DayTensor.map
          (FragCert.denote fragCert_gate_cont)
          (FragCert.denote (fragCert_gate_arg p hp)))
        (FragmentContext.combinedOSplit quote_ctxU_bit
          (OSplit.right OSplit.nil))) :=
  FragCert.denote_appL_eq quote_ctxU_bit quote_ctxL_live0
    (OSplit.right OSplit.nil) Ty.FirstOrder.qubit
    (Ty.SemanticFragment.tensor Ty.FirstOrder.qubit Ty.FirstOrder.bit)
    fragCert_gate_cont (fragCert_gate_arg p hp)

```

### 5.3.459 Explicit outer expansion of quoted gate spine

**Statement.** Explicit outer expansion of quoteGateSpine.

**Proof.** The goal is simplified using the definition of the empty usage mask, the definition of the quoted gate spine, the definition of the fragment certificate gate lambda linear and the fact that observational equality is transitive.

#### Lean 4 source QLambda/Linear/FragmentSourceCircuitN.lean

```

theorem quoteGateSpine_eq (p : Prim)
  (hp : primTy p = .arrow .lin .qubit .qubit) :
  quoteGateSpine p hp =
    FragmentContext.abstractUnrestricted
      (FragmentContext.abstractLinear Ty.FirstOrder.qubit
        (FragCert.denote (fragCert_gate_body p hp))) := by
  have hU :=
    FragCert.denote_lamU_eq CtxUAllBit.nil CtxLAllSomeFragment.nil
      quote_bit_admissible quote_bit_duplicable (by simp [AllNone])
      quotationTy_semanticFragment (fragCert_gate_lamL p hp)
  have hL :=
    FragCert.denote_lamL_eq quote_ctxU_bit CtxLAllSomeFragment.nil
      quote_qubit_admissible Ty.FirstOrder.qubit
      (Ty.SemanticFragment.tensor Ty.FirstOrder.qubit Ty.FirstOrder.bit)
      (fragCert_gate_body p hp)
  simp only [quoteGateSpine, fragCert_gate_lamL]
  exact hU.trans <| congrArg _ hL

```

### 5.3.460 After Yoneda, primitive superoperator of the Pauli-X gate is the canonical Composer x gate

**Statement.** After Yoneda, Prim.superoperator .x is the canonical Composer x gate.

**Proof.** By definition. Unfolding the Yoneda image turns the left-hand side, the Yoneda image of the primitive superoperator of the Pauli-X gate, into the right-hand side, the Yoneda image of the superoperator of a quantum operation of (canonicalModel 1 1).gate (.x 0); the two sides are the same term.

#### Lean 4 source QLambda/Linear/FragmentSourceCircuitN.lean

```

theorem prim_superoperator_x_yoneda_canonicalModel :
  yonedaMap (Prim.superoperator .x) =
    yonedaMap
      (Superoperator.ofQuantumOperation
        ((Composer.canonicalModel 1 1).gate (.x (0 : Fin 1)))) :=
  rfl

```

### 5.3.461 After Yoneda, primitive superoperator of the Hadamard gate is the canonical Composer h gate

**Statement.** After Yoneda, `Prim.superoperator .h` is the canonical `Composer h` gate.

**Proof.** By definition. Unfolding the Yoneda image turns the left-hand side, the Yoneda image of the primitive superoperator of the Hadamard gate, into the right-hand side, the Yoneda image of the superoperator of a quantum operation of `(canonicalModel 1 1).gate (.h 0)`; the two sides are the same term.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

theorem prim_superoperator_h_yoneda_canonicalModel :
  yonedaMap (Prim.superoperator .h) =
    yonedaMap
      (Superoperator.ofQuantumOperation
        ((Composer.canonicalModel 1 1).gate (.h (0 : Fin 1)))) :=
  rfl

```

### 5.3.462 Route-A fragment model of the primitive interpretation of the Pauli-X gate of the canonical matrix model

**Statement.** The primitive interpretation of the Pauli-X gate equals the Yoneda image of the superoperator of a quantum operation of `(canonicalModel 1 1).gate (.x 0)`.

**Proof.** The key step rewrites with the exact agreement of Route A primitive maps with primitive superoperator and the fact that after Yoneda, primitive superoperator of the Pauli-X gate is the canonical `Composer x` gate.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

theorem routeA_primMap_x_canonicalModel :
  routeAFragmentModel.primMap .x =
    yonedaMap
      (Superoperator.ofQuantumOperation
        ((Composer.canonicalModel 1 1).gate (.x (0 : Fin 1)))) := by
  rw [fragment_prim_superoperator]
  exact prim_superoperator_x_yoneda_canonicalModel

```

### 5.3.463 Route-A fragment model of the primitive interpretation of the Hadamard gate of the canonical matrix model

**Statement.** The primitive interpretation of the Hadamard gate equals the Yoneda image of the superoperator of a quantum operation of `(canonicalModel 1 1).gate (.h 0)`.

**Proof.** The key step rewrites with the exact agreement of Route A primitive maps with primitive superoperator and the fact that after Yoneda, primitive superoperator of the Hadamard gate is the canonical Composer  $h$  gate.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
theorem routeA_primMap_h_canonicalModel :
  routeAFragmentModel.primMap .h =
    yonedaMap
      (Superoperator.ofQuantumOperation
        ((Composer.canonicalModel 1 1).gate (.h (0 : Fin 1)))) := by
  rw [fragment_prim_superoperator]
  exact prim_superoperator_h_yoneda_canonicalModel

/ -! ### F7: spine-driven `FragCert.denote` => `CQ.Sem` bridge (skip / x / h)
```

The interpret below is *not* packaging: ``interpretQuoteSpine`` consumes only a Hom together with a witness identifying it as one of the three known quotation spines, and produces a ``CQ.Sem`` built from Composer instruction blocks. No source command is inspected, and the certificate's subject term is an arbitrary ``Term`` -- only the Hom-level equation ``FragCert.denote c = quoteSkipSpine`` (resp. ``quoteGateSpine``) is used. Agreement with ``Command.denote`` is then a

### 5.3.464 Witness identifying a closed quotation Hom as one of the three spines established on the source side (skip)

**Definition.** Witness identifying a closed quotation Hom as one of the three spines established on the source side (skip, gate x, gate h). The witness carries only a Hom-level equation, so it is the sole channel through which a spine determines a CQ meaning.

**Construction.** Generated by the rules skip, gateX and gateH. Every element arises from finitely many applications of these rules, so properties are proved by induction over them.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
inductive QuoteSpineWitness (? : Hom (FragmentContext.combined [] []))
  (fragmentModule Command.quotationTy) : Type where
| skip (h : ? = quoteSkipSpine)
| gateX (h : ? = quoteGateSpine .x rfl)
| gateH (h : ? = quoteGateSpine .h rfl)
```

### 5.3.465 Spine-driven interpretation into classical–quantum meaning

**Definition.** Spine-driven interpretation into `CQ.Sem`. The result is assembled from Composer instruction blocks and depends only on the witnessed spine; it never consults a source Command.

**Construction.** Defined by cases on the input: `.skip _`  $\mapsto$  skip; `.gateX _`  $\mapsto$  the denotation of a block of model and `[.gate (.x 0)]`; `.gateH _`  $\mapsto$  the denotation of a block of model and `[.gate (.h 0)]`.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

noncomputable def interpretQuoteSpine (model : Composer.Model 1 1)
  {? : Hom (FragmentContext.combined [] [])
    (fragmentModule Command.quotationTy)} :
  QuoteSpineWitness ? -> CQ.Sem 1 1
| .skip _ => CQ.skip
| .gateX _ => Composer.denoteBlock model [.gate (.x (0 : Fin 1))]
| .gateH _ => Composer.denoteBlock model [.gate (.h (0 : Fin 1))]

```

### 5.3.466 The interpretation of a quoted spine of the skip equals the classical–quantum of the skip

**Statement.** For a module morphism  $\eta$ : if  $\eta = \text{quoteSkipSpine}$ , then the interpretation of a quoted spine of `model` and the skip of `h` equals `skip`.

**Proof.** By definition. Unfolding the interpretation of a quoted spine turns the left-hand side, the interpretation of a quoted spine of `model` and the skip of `h`, into the right-hand side, `skip`; the two sides are the same term.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

theorem interpretQuoteSpine_skip_eq_CQ_skip (model : Composer.Model 1 1)
  {? : Hom (FragmentContext.combined [] [])
    (fragmentModule Command.quotationTy)} (h : ? = quoteSkipSpine) :
  interpretQuoteSpine model (.skip h) = CQ.skip :=
  rfl

```

### 5.3.467 The interpretation of a quoted spine of the gate x equals a gate block

**Statement.** For a module morphism  $\eta$ , an index `w`: if  $\eta = \text{quoteGateSpine } .x \text{ rfl}$ , then the interpretation of a quoted spine of `model` and the gate `x` of `h` equals the denotation of a block of `model` and `[.gate (.x w)]`.

**Proof.** The key step rewrites with standard identities for finite indices.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

theorem interpretQuoteSpine_gateX_eq_gateBlock (model : Composer.Model 1 1)
  {? : Hom (FragmentContext.combined [] [])
    (fragmentModule Command.quotationTy)} (w : Fin 1)
  (h : ? = quoteGateSpine .x rfl) :
  interpretQuoteSpine model (.gateX h) =
    Composer.denoteBlock model [.gate (.x w)] := by
  rw [Fin.eq_zero w]
  rfl

```

### 5.3.468 The interpretation of a quoted spine of the gate h equals a gate block

**Statement.** For a module morphism  $\eta$ , an index `w`: if  $\eta = \text{quoteGateSpine } .h \text{ rfl}$ , then the interpretation of a quoted spine of `model` and the gate `h` of `h` equals the denotation of a block of `model` and `[.gate (.h w)]`.

**Proof.** The key step rewrites with standard identities for finite indices.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

theorem interpretQuoteSpine_gateH_eq_gateBlock (model : Composer.Model 1 1)
  {? : Hom (FragmentContext.combined [] [])
    (fragmentModule Command.quotationTy)} (w : Fin 1)
  (h : ? = quoteGateSpine .h rfl) :
  interpretQuoteSpine model (.gateH h) =
    Composer.denoteBlock model [.gate (.h w)] := by
  rw [Fin.eq_zero w]
  rfl

```

### 5.3.469 Transport from a closed quotation certificate to classical–quantum meaning via the underlying command

**Definition.** Transport from a closed quotation certificate to  $CQ.Sem$  via the underlying command. This is the packaging source-side interpret retained for earlier citations; the non-packaging bridge is `interpretQuoteSpine`, which agrees with it on the three identified spines (`interpretQuoteHom_skip_eq_spine / _x_ / _h_`).

**Construction.** Defined to be the denotation of `model`.

**Lean 4 source** [QLambda/Linear/FragmentSourceCircuitN.lean](#)

```

noncomputable def interpretQuoteHom {C : Command 1 1}
  (model : Composer.Model 1 1) (_hC : C.Quotable)
  (_c : FragCert.Closed C.quote Command.quotationTy) : CQ.Sem 1 1 :=
  C.denote model

```

### 5.3.470 Definition of the interpretation of the skip spine

**Definition.** Skip-spine interpret: conditioned on  $\eta = \text{quoteSkipSpine}$ , returns  $CQ.skip$ .

**Construction.** Defined to be `skip`.

**Lean 4 source** [QLambda/Linear/FragmentSourceCircuitN.lean](#)

```

noncomputable def interpretSkipSpine (_model : Composer.Model 1 1)
  {? : Hom (FragmentContext.combined [] [])
    (fragmentModule Command.quotationTy)}
  (_h? : ? = quoteSkipSpine) : CQ.Sem 1 1 :=
  CQ.skip

```

### 5.3.471 The interpretation of the skip spine equals the classical–quantum of the skip

**Statement.** For a module morphism  $\eta$ : if  $\eta = \text{quoteSkipSpine}$ , then the interpretation of the skip spine of `model`,  $\eta$ ,  $h\eta$  equals `skip`.

**Proof.** By definition. Unfolding the interpretation of the skip spine turns the left-hand side, the interpretation of the skip spine of `model`,  $\eta$ ,  $h\eta$ , into the right-hand side, `skip`; the two sides are the same term.

**Lean 4 source** [QLambda/Linear/FragmentSourceCircuitN.lean](#)



```

theorem interpretSkipSpine_eq_CQ_skip (model : Composer.Model 1 1)
  (? : Hom (FragmentContext.combined [] []))
  (fragmentModule Command.quotationTy))
  (h? : ? = quoteSkipSpine) :
  interpretSkipSpine model ? h? = CQ.skip :=
  rfl

```

### 5.3.472 The interpretation of the skip spine equals the circuit command of the skip

**Statement.** For a module morphism  $\eta$ : if  $\eta = \text{quoteSkipSpine}$ , then the interpretation of the skip spine of  $\text{model}$ ,  $\eta$ ,  $h\eta$  equals the denotation of  $\text{model}$ .

**Proof.** The proof term combines the facts named in it directly.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

theorem interpretSkipSpine_eq_command_skip (model : Composer.Model 1 1)
  (? : Hom (FragmentContext.combined [] []))
  (fragmentModule Command.quotationTy))
  (h? : ? = quoteSkipSpine) :
  interpretSkipSpine model ? h? = Command.skip.denote model :=
  (command_skip_denote_eq_CQ_skip model).symm

```

### 5.3.473 Relation between the earlier thin skip interpret and the spine-driven one

**Statement.** Relation between the earlier thin skip interpret and the spine-driven one. Formally:  $\text{interpretSkipSpine model } \eta \ h\eta = \text{interpretQuoteSpine model } (.skip \ h\eta)$ .

**Proof.** By definition. Unfolding the interpretation of the skip spine turns the left-hand side, the interpretation of the skip spine of  $\text{model}$ ,  $\eta$ ,  $h\eta$ , into the right-hand side, the interpretation of a quoted spine of  $\text{model}$  and the skip of  $h\eta$ ; the two sides are the same term.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

theorem interpretSkipSpine_eq_interpretQuoteSpine (model : Composer.Model 1 1)
  (? : Hom (FragmentContext.combined [] []))
  (fragmentModule Command.quotationTy))
  (h? : ? = quoteSkipSpine) :
  interpretSkipSpine model ? h? = interpretQuoteSpine model (.skip h?) :=
  rfl

```

### 5.3.474 Non-packaging skip bridge

**Statement.** Non-packaging skip bridge. For an *arbitrary* term  $t$  carrying a closed quotation certificate whose Hom denotation is  $\text{quoteSkipSpine}$ , the spine-driven interpretation is  $\text{CQ.skip}$ , which is  $\text{Command.skip.denote}$ . Formally:  $\text{interpretQuoteSpine model } (.skip \ hc) = \text{skip} \wedge \text{interpretQuoteSpine model } (.skip \ hc) = \text{Command.skip.denote model}$ .

**Proof.** The witness is assembled directly from its components, using reflexivity of equality.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

theorem interpret_skip_quote {t : Term} (model : Composer.Model 1 1)
  (c : FragCert.Closed t Command.quotationTy)
  (hc : FragCert.denote c = quoteSkipSpine) :
  interpretQuoteSpine model (.skip hc) = CQ.skip /\
  interpretQuoteSpine model (.skip hc) = Command.skip.denote model :=
<rfl, (command_skip_denote_eq_CQ_skip model).symm>

```

### 5.3.475 Interpretation of a quoted morphism of the skip

**Statement.** The interpretation of a quoted morphism of model, a skip, c equals skip.

**Proof.** This is an instance of the fact that thin CQ-side interpret for skip: compilation is empty, so denotation is skip.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

theorem interpretQuoteHom_skip (model : Composer.Model 1 1)
  (c : FragCert.Closed Command.skip.quote Command.quotationTy) :
  interpretQuoteHom model .skip c = CQ.skip :=
command_skip_denote_eq_CQ_skip model

```

### 5.3.476 Source Hom denotation of the hand-built skip quote equals the skip spine, and CQ meaning is skip

**Statement.** Source Hom denotation of the hand-built skip quote equals the skip spine, and CQ meaning is CQ.skip. Formally:  $\text{Command.skip.denote model} = \text{skip} \wedge \text{FragCert.denote fragCert\_skip\_quote} = \text{quoteSkipSpine}$ .

**Proof.** The witness is assembled directly from its components, using the fact that thin CQ-side interpret for skip: compilation is empty, so denotation is skip.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

theorem fragCert_skip_quote_interprets (model : Composer.Model 1 1) :
  Command.skip.denote model = CQ.skip /\
  FragCert.denote fragCert_skip_quote = quoteSkipSpine :=
<command_skip_denote_eq_CQ_skip model, fragCert_skip_quote_denote>

```

### 5.3.477 Primitive superoperator of the Pauli-X gate of the Yoneda correspondence of the canonical matrix model of the wire

**Statement.** Wire-0 specialization: gate spine prim leaf agrees with the canonical Composer  $\times$  matrix after Yoneda (any  $\text{Fin } 1$  wire).

**Proof.** The key step rewrites with standard identities for finite indices and the fact that after Yoneda, primitive superoperator of the Pauli-X gate is the canonical Composer  $\times$  gate.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

theorem prim_superoperator_x_yoneda_canonicalModel_wire (w : Fin 1) :
  yonedaMap (Prim.superoperator .x) =
  yonedaMap

```

```

(Superoperator.ofQuantumOperation
  ((Composer.canonicalModel 1 1).gate (.x w))) := by
rw [Fin.eq_zero w]
exact prim_superoperator_x_yoneda_canonicalModel

```

### 5.3.478 Primitive superoperator of the Hadamard gate of the Yoneda correspondence of the canonical matrix model of the wire

**Statement.** For an index  $w$ : the Yoneda image of the primitive superoperator of the Hadamard gate equals the Yoneda image of the superoperator of a quantum operation of  $(\text{canonicalModel } 1 \ 1).\text{gate } (.h \ w)$ .

**Proof.** The key step rewrites with standard identities for finite indices and the fact that after Yoneda, primitive superoperator of the Hadamard gate is the canonical Composer  $h$  gate.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

theorem prim_superoperator_h_yoneda_canonicalModel_wire (w : Fin 1) :
  yonedaMap (Prim.superoperator .h) =
    yonedaMap
      (Superoperator.ofQuantumOperation
        ((Composer.canonicalModel 1 1).gate (.h w))) := by
rw [Fin.eq_zero w]
exact prim_superoperator_h_yoneda_canonicalModel

```

### 5.3.479 CQ denotation of Pauli-X gate is the single-gate Composer block

**Statement.** CQ denotation of  $\text{Command.x}$  is the single-gate Composer block. Formally:  $(\text{Command.x } w).\text{denote model} = \text{denoteBlock model } [.\text{gate } (.x \ w)]$ .

**Proof.** By definition. Unfolding the denotation turns the left-hand side,  $(\text{Command.x } w).\text{denote model}$ , into the right-hand side, the denotation of a block of  $\text{model}$  and  $[.\text{gate } (.x \ w)]$ ; the two sides are the same term.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

theorem command_x_denote_eq_gateBlock (model : Composer.Model 1 1)
  (w : Fin 1) :
  (Command.x w).denote model =
    Composer.denoteBlock model [.\text{gate } (.x \ w)] :=
rfl

```

### 5.3.480 The circuit command of the Hadamard gate of the denotation equals a gate block

**Statement.** For an index  $w$ :  $(\text{Command.h } w).\text{denote model}$  equals the denotation of a block of  $\text{model}$  and  $[.\text{gate } (.h \ w)]$ .

**Proof.** By definition. Unfolding the denotation turns the left-hand side,  $(\text{Command.h } w).\text{denote model}$ , into the right-hand side, the denotation of a block of  $\text{model}$  and  $[.\text{gate } (.h \ w)]$ ; the two sides are the same term.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

theorem command_h_denote_eq_gateBlock (model : Composer.Model 1 1)
  (w : Fin 1) :
  (Command.h w).denote model =
    Composer.denoteBlock model [.gate (.h w)] :=
  rfl

```

### 5.3.481 Quotation of the interpretation of the Pauli-X gate

**Statement.** Non-packaging  $x$  bridge: any closed quotation certificate (of an arbitrary term) whose Hom denotation is the  $x$  gate spine interprets as the single-gate Composer block, i.e. as  $(\text{Command.x } w) . \text{denote model}$ .

**Proof.** The witness is assembled directly from its components, using the fact that the interpretation of a quoted spine of the gate  $x$  equals a gate block.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

theorem interpret_x_quote {t : Term} (model : Composer.Model 1 1) (w : Fin 1)
  (c : FragCert.Closed t Command.quotationTy)
  (hc : FragCert.denote c = quoteGateSpine .x rfl) :
  interpretQuoteSpine model (.gateX hc) =
    Composer.denoteBlock model [.gate (.x w)] /\
  interpretQuoteSpine model (.gateX hc) = (Command.x w).denote model :=
<interpretQuoteSpine_gateX_eq_gateBlock model w hc,
  (interpretQuoteSpine_gateX_eq_gateBlock model w hc).trans
  (command_x_denote_eq_gateBlock model w).symm>

```

### 5.3.482 Non-packaging $h$ bridge, dual to interpretation $x$ quotation

**Statement.** Non-packaging  $h$  bridge, dual to `interpret_x_quote`.

**Proof.** The witness is assembled directly from its components, using the fact that the interpretation of a quoted spine of the gate  $h$  equals a gate block.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

theorem interpret_h_quote {t : Term} (model : Composer.Model 1 1) (w : Fin 1)
  (c : FragCert.Closed t Command.quotationTy)
  (hc : FragCert.denote c = quoteGateSpine .h rfl) :
  interpretQuoteSpine model (.gateH hc) =
    Composer.denoteBlock model [.gate (.h w)] /\
  interpretQuoteSpine model (.gateH hc) = (Command.h w).denote model :=
<interpretQuoteSpine_gateH_eq_gateBlock model w hc,
  (interpretQuoteSpine_gateH_eq_gateBlock model w hc).trans
  (command_h_denote_eq_gateBlock model w).symm>

```

### 5.3.483 Spine interpretation of the hand-built skip quote certificate

**Statement.** Spine interpretation of the hand-built skip quote certificate. Formally: `interpretQuoteSpine model (.skip fragCert_skip_quote_denote) = Command.skip.denote model`.

**Proof.** The proof term combines the facts named in it directly.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
theorem fragCert_skip_quote_spine_interpret (model : Composer.Model 1 1) :  
  interpretQuoteSpine model (.skip fragCert_skip_quote_denote) =  
    Command.skip.denote model :=  
  (interpret_skip_quote model fragCert_skip_quote fragCert_skip_quote_denote).2
```

### 5.3.484 Spine interpretation of the hand-built $x$ quote certificate

**Statement.** Spine interpretation of the hand-built  $x$  quote certificate. Formally: `interpretQuoteSpine model (.gateX (fragCert_x_quote_denote w)) = (Command.x w).denote model`.

**Proof.** The proof term combines the facts named in it directly.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
theorem fragCert_x_quote_spine_interpret (model : Composer.Model 1 1)  
  (w : Fin 1) :  
  interpretQuoteSpine model (.gateX (fragCert_x_quote_denote w)) =  
    (Command.x w).denote model :=  
  (interpret_x_quote model w (fragCert_x_quote w)  
    (fragCert_x_quote_denote w)).2
```

### 5.3.485 Spine interpretation of the hand-built $h$ quote certificate

**Statement.** Spine interpretation of the hand-built  $h$  quote certificate. Formally: `interpretQuoteSpine model (.gateH (fragCert_h_quote_denote w)) = (Command.h w).denote model`.

**Proof.** The proof term combines the facts named in it directly.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
theorem fragCert_h_quote_spine_interpret (model : Composer.Model 1 1)  
  (w : Fin 1) :  
  interpretQuoteSpine model (.gateH (fragCert_h_quote_denote w)) =  
    (Command.h w).denote model :=  
  (interpret_h_quote model w (fragCert_h_quote w)  
    (fragCert_h_quote_denote w)).2
```

### 5.3.486 Any closed certificate for quotation feeds the skip bridge: its denotation is forced to be quoted skip spine

**Statement.** Any closed certificate for `Command.skip.quote` feeds the skip bridge: its denotation is forced to be `quoteSkipSpine`. Formally: `interpretQuoteSpine model (.skip (fragCert_skip_quote_denote_independent c)) = Command.skip.denote model`.

**Proof.** The proof term combines the facts named in it directly.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

theorem interpret_skip_quote_of_closed (model : Composer.Model 1 1)
  (c : FragCert.Closed Command.skip.quote Command.quotationTy) :
  interpretQuoteSpine model
    (.skip (fragCert_skip_quote_denote_independent c)) =
    Command.skip.denote model :=
  (interpret_skip_quote model c
    (fragCert_skip_quote_denote_independent c)).2

```

### 5.3.487 Quotation of the interpretation of the Pauli-X gate, assuming closed term

**Statement.** Any closed certificate for  $(\text{Command.x } w).\text{quote}$  feeds the  $x$  bridge. Formally:  $\text{interpretQuoteSpine model } (.gateX \text{ (fragCert\_x\_quote\_denote\_independent } w \text{ c)}) = (\text{Command.x } w).\text{denote model}$ .

**Proof.** The proof term combines the facts named in it directly.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

theorem interpret_x_quote_of_closed (model : Composer.Model 1 1) (w : Fin 1)
  (c : FragCert.Closed (Command.x w).quote Command.quotationTy) :
  interpretQuoteSpine model
    (.gateX (fragCert_x_quote_denote_independent w c)) =
    (Command.x w).denote model :=
  (interpret_x_quote model w c
    (fragCert_x_quote_denote_independent w c)).2

```

### 5.3.488 Quotation of the interpretation of the Hadamard gate, assuming closed term

**Statement.** Any closed certificate for  $(\text{Command.h } w).\text{quote}$  feeds the  $h$  bridge. Formally:  $\text{interpretQuoteSpine model } (.gateH \text{ (fragCert\_h\_quote\_denote\_independent } w \text{ c)}) = (\text{Command.h } w).\text{denote model}$ .

**Proof.** The proof term combines the facts named in it directly.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

theorem interpret_h_quote_of_closed (model : Composer.Model 1 1) (w : Fin 1)
  (c : FragCert.Closed (Command.h w).quote Command.quotationTy) :
  interpretQuoteSpine model
    (.gateH (fragCert_h_quote_denote_independent w c)) =
    (Command.h w).denote model :=
  (interpret_h_quote model w c
    (fragCert_h_quote_denote_independent w c)).2

```

### 5.3.489 The spine-driven meaning is determined by the Hom alone

**Statement.** The spine-driven meaning is determined by the Hom alone: two closed certificates for possibly different terms that denote as the skip spine get the same CQ interpretation. Formally:  $\text{interpretQuoteSpine model } (.skip \text{ } h_1) = \text{interpretQuoteSpine model } (.skip \text{ } h_2)$ .

**Proof.** By definition. Unfolding the interpretation of a quoted spine turns the left-hand side, the interpretation of a quoted spine of  $\text{model}$  and the skip of  $h_1$ , into the right-hand side, the interpretation of a quoted spine of  $\text{model}$  and the skip of  $h_2$ ; the two sides are the same term.

### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
theorem interpret_skip_quote_determined {t_1 t_2 : Term}
  (model : Composer.Model 1 1)
  (c_1 : FragCert.Closed t_1 Command.quotationTy)
  (c_2 : FragCert.Closed t_2 Command.quotationTy)
  (h_1 : FragCert.denote c_1 = quoteSkipSpine)
  (h_2 : FragCert.denote c_2 = quoteSkipSpine) :
  interpretQuoteSpine model (.skip h_1) =
    interpretQuoteSpine model (.skip h_2) :=
  rfl
```

#### 5.3.490 The interpretation Pauli-X gate quotation is determined

**Statement.** For terms  $t_1, t_2$ : if  $\text{FragCert.denote } c_1 = \text{quoteGateSpine } .x \text{ rfl}$  and  $\text{FragCert.denote } c_2 = \text{quoteGateSpine } .x \text{ rfl}$ , then the interpretation of a quoted spine of  $\text{model}$  and the gate  $x$  of  $h_1$  equals the interpretation of a quoted spine of  $\text{model}$  and the gate  $x$  of  $h_2$ .

**Proof.** By definition. Unfolding the interpretation of a quoted spine turns the left-hand side, the interpretation of a quoted spine of  $\text{model}$  and the gate  $x$  of  $h_1$ , into the right-hand side, the interpretation of a quoted spine of  $\text{model}$  and the gate  $x$  of  $h_2$ ; the two sides are the same term.

### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
theorem interpret_x_quote_determined {t_1 t_2 : Term}
  (model : Composer.Model 1 1)
  (c_1 : FragCert.Closed t_1 Command.quotationTy)
  (c_2 : FragCert.Closed t_2 Command.quotationTy)
  (h_1 : FragCert.denote c_1 = quoteGateSpine .x rfl)
  (h_2 : FragCert.denote c_2 = quoteGateSpine .x rfl) :
  interpretQuoteSpine model (.gateX h_1) =
    interpretQuoteSpine model (.gateX h_2) :=
  rfl
```

#### 5.3.491 The interpretation Hadamard gate quotation is determined

**Statement.** For terms  $t_1, t_2$ : if  $\text{FragCert.denote } c_1 = \text{quoteGateSpine } .h \text{ rfl}$  and  $\text{FragCert.denote } c_2 = \text{quoteGateSpine } .h \text{ rfl}$ , then the interpretation of a quoted spine of  $\text{model}$  and the gate  $h$  of  $h_1$  equals the interpretation of a quoted spine of  $\text{model}$  and the gate  $h$  of  $h_2$ .

**Proof.** By definition. Unfolding the interpretation of a quoted spine turns the left-hand side, the interpretation of a quoted spine of  $\text{model}$  and the gate  $h$  of  $h_1$ , into the right-hand side, the interpretation of a quoted spine of  $\text{model}$  and the gate  $h$  of  $h_2$ ; the two sides are the same term.

### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
theorem interpret_h_quote_determined {t_1 t_2 : Term}
  (model : Composer.Model 1 1)
  (c_1 : FragCert.Closed t_1 Command.quotationTy)
  (c_2 : FragCert.Closed t_2 Command.quotationTy)
  (h_1 : FragCert.denote c_1 = quoteGateSpine .h rfl)
  (h_2 : FragCert.denote c_2 = quoteGateSpine .h rfl) :
  interpretQuoteSpine model (.gateH h_1) =
```

```
interpretQuoteSpine model (.gateH h_2) :=
rfl
```

### 5.3.492 Interpretation of a quoted morphism of the Pauli-X gate

**Statement.** For an index  $w$ : the interpretation of a quoted morphism of `model`, the Pauli-X gate,  $c$  equals `(Command.x w).denote model`.

**Proof.** By definition. Unfolding the interpretation of a quoted morphism turns the left-hand side, the interpretation of a quoted morphism of `model`, the Pauli-X gate,  $c$ , into the right-hand side, `(Command.x w).denote model`; the two sides are the same term.

**Lean 4 source** [QLambda/Linear/FragmentSourceCircuitN.lean](#)

```
theorem interpretQuoteHom_x (model : Composer.Model 1 1) (w : Fin 1)
  (c : FragCert.Closed (Command.x w).quote Command.quotationTy) :
  interpretQuoteHom model .x c = (Command.x w).denote model :=
rfl
```

### 5.3.493 The packaging interpret agrees with the spine-driven one on skip

**Statement.** The packaging interpret agrees with the spine-driven one on `skip`.

**Proof.** The proof term combines the facts named in it directly.

**Lean 4 source** [QLambda/Linear/FragmentSourceCircuitN.lean](#)

```
theorem interpretQuoteHom_skip_eq_spine (model : Composer.Model 1 1) :
  interpretQuoteHom model .skip fragCert_skip_quote =
  interpretQuoteSpine model (.skip fragCert_skip_quote_denote) :=
(fragCert_skip_quote_spine_interpret model).symm
```

### 5.3.494 The packaging interpret agrees with the spine-driven one on $x$

**Statement.** The packaging interpret agrees with the spine-driven one on  $x$ .

**Proof.** The proof term combines the facts named in it directly.

**Lean 4 source** [QLambda/Linear/FragmentSourceCircuitN.lean](#)

```
theorem interpretQuoteHom_x_eq_spine (model : Composer.Model 1 1) (w : Fin 1) :
  interpretQuoteHom model .x (fragCert_x_quote w) =
  interpretQuoteSpine model (.gateX (fragCert_x_quote_denote w)) :=
(fragCert_x_quote_spine_interpret model w).symm
```

### 5.3.495 The packaging interpret agrees with the spine-driven one on $h$

**Statement.** The packaging interpret agrees with the spine-driven one on  $h$ .

**Proof.** The proof term combines the facts named in it directly.

**Lean 4 source** [QLambda/Linear/FragmentSourceCircuitN.lean](#)



```

theorem interpretQuoteHom_h_eq_spine (model : Composer.Model 1 1) (w : Fin 1) :
  interpretQuoteHom model .h (fragCert_h_quote w) =
    interpretQuoteSpine model (.gateH (fragCert_h_quote_denote w)) :=
(fragCert_h_quote_spine_interpret model w).symm

```

### 5.3.496 Interpretation of a quoted morphism of the Hadamard gate

**Statement.** For an index  $w$ : the interpretation of a quoted morphism of `model`, the Hadamard gate,  $c$  equals `(Command.h w).denote model`.

**Proof.** By definition. Unfolding the interpretation of a quoted morphism turns the left-hand side, the interpretation of a quoted morphism of `model`, the Hadamard gate,  $c$ , into the right-hand side, `(Command.h w).denote model`; the two sides are the same term.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

theorem interpretQuoteHom_h (model : Composer.Model 1 1) (w : Fin 1)
  (c : FragCert.Closed (Command.h w).quote Command.quotationTy) :
  interpretQuoteHom model .h c = (Command.h w).denote model :=
rfl

```

### 5.3.497 Hom denotation of the $x$ quote is the gate spine

**Statement.** Hom denotation of the  $x$  quote is the gate spine; FO prim leaf agrees with the canonical `Composer x gate`; CQ meaning is the gate block.

**Proof.** The witness is assembled directly from its components, using the denotation of the fragment certificate of the Pauli-X gate of the quotation.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

theorem fragCert_x_quote_interprets (w : Fin 1) :
  FragCert.denote (fragCert_x_quote w) = quoteGateSpine .x rfl /\
  yonedaMap (Prim.superoperator .x) =
    yonedaMap
      (Superoperator.ofQuantumOperation
        ((Composer.canonicalModel 1 1).gate (.x w))) /\
  (Command.x w).denote (Composer.canonicalModel 1 1) =
    Composer.denoteBlock (Composer.canonicalModel 1 1) [.gate (.x w)] :=
<fragCert_x_quote_denote w,
  prim_superoperator_x_yoneda_canonicalModel_wire w,
  command_x_denote_eq_gateBlock _ w>

```

### 5.3.498 Hom denotation of the $h$ quote is the gate spine

**Statement.** Hom denotation of the  $h$  quote is the gate spine; FO prim leaf agrees with the canonical `Composer h gate`; CQ meaning is the gate block.

**Proof.** The witness is assembled directly from its components, using the denotation of the fragment certificate of the Hadamard gate of the quotation.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

theorem fragCert_h_quote_interprets (w : Fin 1) :
  FragCert.denote (fragCert_h_quote w) = quoteGateSpine .h rfl /\
  yonedaMap (Prim.superoperator .h) =
    yonedaMap
      (Superoperator.ofQuantumOperation
        ((Composer.canonicalModel 1 1).gate (.h w))) /\
  (Command.h w).denote (Composer.canonicalModel 1 1) =
    Composer.denoteBlock (Composer.canonicalModel 1 1) [.gate (.h w)] :=
<fragCert_h_quote_denote w,
  prim_superoperator_h_yoneda_canonicalModel_wire w,
  command_h_denote_eq_gateBlock _ w>

```

### 5.3.499 Unified skip/x/h interpret package

**Statement.** Unified skip/x/h interpret package: Hom spines match hand-built certificates, and CQ meanings agree with `Command.denote / prim-gate Yoneda` equality on the canonical model.

**Proof.** The witness is assembled directly from its components.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

theorem interpretQuoteHom_skip_x_h (model : Composer.Model 1 1)
  (w : Fin 1) :
  (interpretQuoteHom model .skip fragCert_skip_quote = CQ.skip /\
   FragCert.denote fragCert_skip_quote = quoteSkipSpine) /\
  (interpretQuoteHom model .x (fragCert_x_quote w) =
    (Command.x w).denote model /\
    FragCert.denote (fragCert_x_quote w) = quoteGateSpine .x rfl /\
    yonedaMap (Prim.superoperator .x) =
      yonedaMap
        (Superoperator.ofQuantumOperation
          ((Composer.canonicalModel 1 1).gate (.x w)))) /\
  (interpretQuoteHom model .h (fragCert_h_quote w) =
    (Command.h w).denote model /\
    FragCert.denote (fragCert_h_quote w) = quoteGateSpine .h rfl /\
    yonedaMap (Prim.superoperator .h) =
      yonedaMap
        (Superoperator.ofQuantumOperation
          ((Composer.canonicalModel 1 1).gate (.h w)))) :=
<<interpretQuoteHom_skip model fragCert_skip_quote,
  fragCert_skip_quote_denote>,
  <rfl, fragCert_x_quote_denote w,
    prim_superoperator_x_yoneda_canonicalModel_wire w>,
  <rfl, fragCert_h_quote_denote w,
    prim_superoperator_h_yoneda_canonicalModel_wire w>>

```

### 5.3.500 Unified non-packaging F7 bridge for skip/x/h

**Statement.** Unified non-packaging F7 bridge for skip/x/h. Each conjunct starts from a Hom-level equation `FragCert.denote c = spine` for a certificate on an *arbitrary* term and lands on `Command.denote`, with the CQ value produced by `interpretQuoteSpine` from the Hom witness alone.

**Proof.** The witness is assembled directly from its components, using the non-packaging skip bridge.

### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
theorem fragCert_spine_interprets_skip_x_h (model : Composer.Model 1 1)
  (w : Fin 1) {t_0 t_1 t_2 : Term}
  (c_0 : FragCert.Closed t_0 Command.quotationTy)
  (c_1 : FragCert.Closed t_1 Command.quotationTy)
  (c_2 : FragCert.Closed t_2 Command.quotationTy)
  (h_0 : FragCert.denote c_0 = quoteSkipSpine)
  (h_1 : FragCert.denote c_1 = quoteGateSpine .x rfl)
  (h_2 : FragCert.denote c_2 = quoteGateSpine .h rfl) :
  (interpretQuoteSpine model (.skip h_0) = CQ.skip /\
    interpretQuoteSpine model (.skip h_0) = Command.skip.denote model) /\
  (interpretQuoteSpine model (.gateX h_1) =
    Composer.denoteBlock model [.gate (.x w)] /\
    interpretQuoteSpine model (.gateX h_1) = (Command.x w).denote model) /\
  (interpretQuoteSpine model (.gateH h_2) =
    Composer.denoteBlock model [.gate (.h w)] /\
    interpretQuoteSpine model (.gateH h_2) = (Command.h w).denote model) :=
<interpret_skip_quote model c_0 h_0,
  interpret_x_quote model w c_1 h_1,
  interpret_h_quote model w c_2 h_2>
```

#### 5.3.501 The fragment certificate quotation spine is interpreted as skip, Pauli-X gate and Hadamard gate

**Statement.** Certificate-level F7 package: for the canonical quotations of skip/x/h the spine hypothesis is discharged for *every* closed certificate, so the non-packaging interpretation always agrees with `Command.denote`.

**Proof.** The witness is assembled directly from its components, using the fact that any closed certificate for quotation feeds the skip bridge: its denotation is forced to be quoted skip spine.

### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
theorem fragCert_quote_spine_interprets_skip_x_h (model : Composer.Model 1 1)
  (w : Fin 1)
  (c_0 : FragCert.Closed Command.skip.quote Command.quotationTy)
  (c_1 : FragCert.Closed (Command.x w).quote Command.quotationTy)
  (c_2 : FragCert.Closed (Command.h w).quote Command.quotationTy) :
  interpretQuoteSpine model
    (.skip (fragCert_skip_quote_denote_independent c_0)) =
    Command.skip.denote model /\
  interpretQuoteSpine model
    (.gateX (fragCert_x_quote_denote_independent w c_1)) =
    (Command.x w).denote model /\
  interpretQuoteSpine model
    (.gateH (fragCert_h_quote_denote_independent w c_2)) =
    (Command.h w).denote model :=
<interpret_skip_quote_of_closed model c_0,
  interpret_x_quote_of_closed model w c_1,
  interpret_h_quote_of_closed model w c_2>
```

### 5.3.502 Propositional content of the N-bounded source-quotation package

**Definition.** Propositional content of the N-bounded source-quotation package.

**Construction.** Defined by an explicit formula built from the qubit-usage bound, the denotation, the closed term unit certificate and the closed term point.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
def FragmentSourceQuotationAgreement (N : Nat) : Prop :=
  UsesAtMostQubits N .unit /\
  (forall b, UsesAtMostQubits N (.bitLit b)) /\
  (FragCert.denote FragCert.closed_unit_cert =
    FragmentContext.closedPoint routeAFragmentModel.unitIntro) /\
  (forall b, FragCert.denote (FragCert.closed_bitLit_cert b) =
    FragmentContext.closedPoint (routeAFragmentModel.bitLit b)) /\
  (forall b, routeAFragmentModel.measureBranch b = measureBranchYoneda b) /\
  (forall (q : Nat) (_hq : q <= N) (w : Fin q) (? : Runtime.RegisterState q),
    Runtime.RegisterState.measureProbability ? w false +
    Runtime.RegisterState.measureProbability ? w true = 1) /\
  (forall C (_hC : Command.Quotable C),
    Nonempty (FragCert.Closed C.quote Command.quotationTy)) /\
  (forall (model : Composer.Model 1 1) (Q : Command.Quotation),
    CQ.Eq (Q.denote model) (Q.compile.denote model))
```

### 5.3.503 Source-quotation agreement for arbitrary N

**Statement.** Source-quotation agreement for arbitrary N: closed fragment denotations and measurement branches agree with Route A under the live-qubit policy. Formally: `FragmentSourceQuotationAgreement N`.

**Proof.** The proof term combines the facts named in it directly.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
theorem fragment_source_quotation_agreement (N : Nat) :
  FragmentSourceQuotationAgreement N :=
  let h := fragment_observable_adequacy N
  <h.1, h.2.1, h.2.2.1, h.2.2.2.1, h.2.2.2.2.1, h.2.2.2.2.2,
    fun _ hC => fragment_quote_has_fragCert hC,
    fun model Q => Command.Quotation.denote_compile model Q>
```

### 5.3.504 Propositional content of the N-bounded source-elaboration package

**Definition.** Propositional content of the N-bounded source-elaboration package.

**Construction.** Defined by an explicit formula built from the denotation, the closed term unit certificate, the closed term point and the unit introduction.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```
def FragmentSourceElaborationAgreement (_N : Nat) : Prop :=
  (FragCert.denote FragCert.closed_unit_cert =
    FragmentContext.closedPoint routeAFragmentModel.unitIntro) /\
  (forall b, FragCert.denote (FragCert.closed_bitLit_cert b) =
```

```

    FragmentContext.closedPoint (routeAFragmentModel.bitLit b)) /\
(forall b, routeAFragmentModel.measureBranch b = measureBranchYoneda b) /\
Ty.SemanticFragment Command.quotationTy /\
(forall C (_hC : Command.Quotable C),
  Nonempty (FragCert.Closed C.quote Command.quotationTy)) /\
(forall {q c fuel M} {P : Compilation q c M} (_h : Elaborates fuel M P)
  (model : Composer.Model q c),
  CQ.Eq (Composer.denoteBlock model P.command.compile)
    (P.command.denote model))

```

### 5.3.505 Source–elaboration agreement for arbitrary N

**Statement.** Source–elaboration agreement for arbitrary N: denotational unit/bit maps, Born packaging, quotation certificates, and staged CQ compile agreement. Formally: `FragmentSourceElaborationAgreement N`.

**Proof.** The proof term combines the facts named in it directly.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

theorem fragment_source_elaboration_agreement (N : Nat) :
  FragmentSourceElaborationAgreement N :=
  let h := fragment_observable_adequacy N
  <h.2.2.1, h.2.2.2.1, h.2.2.2.2.1, n_quotationTy_semanticFragment N,
    fun _ hC => fragment_quote_has_fragCert hC,
    fun {_q _c _fuel _M _P} h model => elaborates_compile_agreement h model>

```

### 5.3.506 One-wire specialization of the uniform N source–quotation package

**Statement.** One-wire specialization of the uniform N source–quotation package. Formally: `FragmentSourceQuotationAgreement 1`.

**Proof.** This is an instance of the source–quotation agreement for arbitrary N.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

theorem fragment_source_quotation_agreement_one_wire :
  FragmentSourceQuotationAgreement 1 :=
  fragment_source_quotation_agreement 1

```

### 5.3.507 Two-wire specialization of the uniform N source–quotation package

**Statement.** Two-wire specialization of the uniform N source–quotation package. Formally: `FragmentSourceQuotationAgreement 2`.

**Proof.** This is an instance of the source–quotation agreement for arbitrary N.

#### Lean 4 source `QLambda/Linear/FragmentSourceCircuitN.lean`

```

theorem fragment_source_quotation_agreement_two_wire :
  FragmentSourceQuotationAgreement 2 :=
  fragment_source_quotation_agreement 2

```

### 5.3.508 Literal-only re-export retained for earlier citations

**Statement.** Literal-only re-export retained for earlier citations.

**Proof.** This is an instance of the literal-only corollary retained for earlier citations.

#### Lean 4 source [QLambda/Linear/FragmentSourceCircuitN.lean](#)

```
theorem fragment_source_quotation_agreement_literals (N : Nat) :
  UsesAtMostQubits N .unit /\
  (forall b, UsesAtMostQubits N (.bitLit b)) /\
  (FragCert.denoteUnit FragCert.closed_unit_cert =
   routeAFragmentModel.unitIntro) /\
  (forall b, FragCert.denoteBitLit (FragCert.closed_bitLit_cert b) =
   routeAFragmentModel.bitLit b) :=
  fragment_observable_adequacy_literals N
```

### 5.3.509 The fragment source elaboration agreement literals

**Statement.** For a natural number  $\_N$ :  $\text{FragCert.denoteUnit FragCert.closed\_unit\_cert} = \text{routeAFragmentModel.unitIntro}$  and for every  $b$ ,  $\text{FragCert.denoteBitLit (FragCert.closed\_bitLit\_cert } b) = \text{routeAFragmentModel.bitLit } b$ .

**Proof.** The witness is assembled directly from its components, using the formula for the denotation unit.

#### Lean 4 source [QLambda/Linear/FragmentSourceCircuitN.lean](#)

```
theorem fragment_source_elaboration_agreement_literals (_N : Nat) :
  (FragCert.denoteUnit FragCert.closed_unit_cert =
   routeAFragmentModel.unitIntro) /\
  (forall b, FragCert.denoteBitLit (FragCert.closed_bitLit_cert b) =
   routeAFragmentModel.bitLit b) :=
  <FragCert.denoteUnit_eq _, fun _ => FragCert.denoteBitLit_eq _>
```

### 5.3.510 Commuting-square package: weighted simulation

**Statement.** Commuting-square package: weighted simulation, quote certificates, CQ compile/reflect equalities, and the N-bounded source packages. Hom-side bridge: `fragCert_skip_quote_interprets / fragCert_x_quote_interprets / fragCert_h_quote_interprets` identify closed quote denotations with `quoteSkipSpine / quoteGateSpine` and CQ via `interpretQuoteHom` plus `Prim.superoperator-canonical-gate Yoneda` agreement, and `fragCert_quote_spine_interprets_skip_x_h` upgrades this to the non-packaging `interpretQuoteSpine` bridge. A general Hom-inspecting `FragCert.denote $\leftrightarrow$ CQ.Sem` extract for arbitrary quoted commands remains open.

**Proof.** The witness is assembled directly from its components.

#### Lean 4 source [QLambda/Linear/FragmentSourceCircuitN.lean](#)

```
theorem fragment_source_circuit_commuting_square (N : Nat) :
  Nonempty (FragmentWeightedSimulation N) /\
  (forall C (_hC : Command.Quotable C),
   Nonempty (FragCert.Closed C.quote Command.quotationTy)) /\
  (forall (model : Composer.Model 1 1) (Q : Command.Quotation),
```

```

    CQ.Eq (Q.denote model) (Q.compile.denote model)) /\
    (forall (model : Composer.Model 1 1) (C : Command 1 1) (hC : C.Quotable),
      CQ.Eq ((Command.Quotation.reflect C hC).denote model) (C.denote model)) /\
    FragmentSourceQuotationAgreement N /\
    FragmentSourceElaborationAgreement N :=
<<fragmentWeightedSimulation N>,
  fun _ hC => fragment_quote_has_fragCert hC,
  fun model Q => Command.Quotation.denote_compile model Q,
  fun model C hC => Command.Quotation.denote_reflect model C hC,
  fragment_source_quotation_agreement N,
  fragment_source_elaboration_agreement N>

```

### 5.3.511 F4c: denotational congruence for fragment Step constructors

**Statement.** ## F4c: denotational congruence for fragment Step constructors. Formally:  $\text{FragCert.denote} (\text{.appL } h\Gamma \ h\Delta \ hs \ hFO \ hB \ cF \ cX) = \text{FragCert.denote} (\text{.appL } h\Gamma \ h\Delta \ hs \ hFO \ hB \ cF' \ cX)$ .

**Proof.** The goal is simplified using the formula for the denotation of the linear application and the hypothesis that  $\text{FragCert.denote } cF = \text{FragCert.denote } cF'$ .

#### Lean 4 source `QLambda/Linear/FragmentStepCongruence.lean`

```

theorem fragment_step_congruence_appL_fun {Gamma Delta Delta_1 Delta_2 A B F F' X}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hFO : Ty.FirstOrder A)
  (hB : Ty.SemanticFragment B)
  (cF : FragCert Gamma Delta_1 F (.arrow .lin A B))
  (cF' : FragCert Gamma Delta_1 F' (.arrow .lin A B))
  (cX : FragCert Gamma Delta_2 X A)
  (h : FragCert.denote cF = FragCert.denote cF') :
  FragCert.denote (.appL hGamma hDelta hs hFO hB cF cX) =
  FragCert.denote (.appL hGamma hDelta hs hFO hB cF' cX) := by
  simp only [FragCert.denote_appL_eq, h]

```

### 5.3.512 Fragment of the one-step reduction of the congruence of the linear application of the argument

**Statement.** If every unrestricted variable of  $\Gamma$  has bit type; every cell of the linear context  $\Delta$  is occupied by a fragment type;  $\Delta$  splits into the left part  $\Delta_1$  and the right part  $\Delta_2$ ; and  $A$  is a first-order type, then the denotation of  $\text{.appL } h\Gamma \ h\Delta \ hs \ hFO \ hB \ cF \ cX$  equals the denotation of  $\text{.appL } h\Gamma \ h\Delta \ hs \ hFO \ hB \ cF \ cX'$ .

**Proof.** The goal is simplified using the formula for the denotation of the linear application and the hypothesis that  $\text{FragCert.denote } cX = \text{FragCert.denote } cX'$ .

#### Lean 4 source `QLambda/Linear/FragmentStepCongruence.lean`

```

theorem fragment_step_congruence_appL_arg {Gamma Delta Delta_1 Delta_2 A B F X X'}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hFO : Ty.FirstOrder A)
  (hB : Ty.SemanticFragment B)
  (cF : FragCert Gamma Delta_1 F (.arrow .lin A B))

```

```

(cX : FragCert Gamma Delta_2 X A) (cX' : FragCert Gamma Delta_2 X' A)
(h : FragCert.denote cX = FragCert.denote cX') :
FragCert.denote (.appL hGamma hDelta hs hFO hB cF cX) =
  FragCert.denote (.appL hGamma hDelta hs hFO hB cF cX') := by
simp only [FragCert.denote_appL_eq, h]

```

### 5.3.513 Fragment of the one-step reduction of the congruence of the unrestricted application of the fun

**Statement.** If every unrestricted variable of  $\Gamma$  has bit type; every cell of the linear context  $\Delta$  is occupied by a fragment type;  $\Delta$  splits into the left part  $\Delta_F$  and the right part  $\Delta_X$ ; and  $\Delta_X$  is an empty usage mask, then the denotation of  $\text{.appU } h\Gamma \ h\Delta \ hs \ hN \ hB \ cF \ cX$  equals the denotation of  $\text{.appU } h\Gamma \ h\Delta \ hs \ hN \ hB \ cF' \ cX$ .

**Proof.** The goal is simplified using the formula for the denotation of the unrestricted application and the hypothesis that  $\text{FragCert.denote } cF = \text{FragCert.denote } cF'$ .

#### Lean 4 source `QLambda/Linear/FragmentStepCongruence.lean`

```

theorem fragment_step_congruence_appU_fun {Gamma Delta DeltaF DeltaX B F F' X}
(hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
(hs : OSplit Delta DeltaF DeltaX) (hN : AllNone DeltaX)
(hB : Ty.SemanticFragment B)
(cF : FragCert Gamma DeltaF F (.arrow .unres .bit B))
(cF' : FragCert Gamma DeltaF F' (.arrow .unres .bit B))
(cX : FragCert Gamma DeltaX X .bit)
(h : FragCert.denote cF = FragCert.denote cF') :
FragCert.denote (.appU hGamma hDelta hs hN hB cF cX) =
  FragCert.denote (.appU hGamma hDelta hs hN hB cF' cX) := by
simp only [FragCert.denote_appU_eq, h]

```

### 5.3.514 Fragment of the one-step reduction of the congruence of the unrestricted application of the argument

**Statement.** If every unrestricted variable of  $\Gamma$  has bit type; every cell of the linear context  $\Delta$  is occupied by a fragment type;  $\Delta$  splits into the left part  $\Delta_F$  and the right part  $\Delta_X$ ; and  $\Delta_X$  is an empty usage mask, then the denotation of  $\text{.appU } h\Gamma \ h\Delta \ hs \ hN \ hB \ cF \ cX$  equals the denotation of  $\text{.appU } h\Gamma \ h\Delta \ hs \ hN \ hB \ cF \ cX'$ .

**Proof.** The goal is simplified using the formula for the denotation of the unrestricted application and the hypothesis that  $\text{FragCert.denote } cX = \text{FragCert.denote } cX'$ .

#### Lean 4 source `QLambda/Linear/FragmentStepCongruence.lean`

```

theorem fragment_step_congruence_appU_arg {Gamma Delta DeltaF DeltaX B F X X'}
(hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
(hs : OSplit Delta DeltaF DeltaX) (hN : AllNone DeltaX)
(hB : Ty.SemanticFragment B)
(cF : FragCert Gamma DeltaF F (.arrow .unres .bit B))
(cX : FragCert Gamma DeltaX X .bit) (cX' : FragCert Gamma DeltaX X' .bit)
(h : FragCert.denote cX = FragCert.denote cX') :
FragCert.denote (.appU hGamma hDelta hs hN hB cF cX) =
  FragCert.denote (.appU hGamma hDelta hs hN hB cF cX') := by
simp only [FragCert.denote_appU_eq, h]

```



```

FragCert.denote (.appU hGamma hDelta hs hN hB cF cX') := by
simp only [FragCert.denote_appU_eq, h]

```

### 5.3.515 The fragment one-step reduction congruence conditional scrutinee

**Statement.** If every unrestricted variable of  $\Gamma$  has bit type; every cell of the linear context  $\Delta$  is occupied by a fragment type;  $\Delta$  splits into the left part  $\Delta_1$  and the right part  $\Delta_2$ ; and  $A$  lies in the semantic fragment, then the denotation of `.ite h $\Gamma$  h $\Delta$  hs hA cB cT cE` equals the denotation of `.ite h $\Gamma$  h $\Delta$  hs hA cB' cT cE`.

**Proof.** The goal is simplified using the formula for the denotation of the conditional and the hypothesis that `FragCert.denote cB = FragCert.denote cB'`.

#### Lean 4 source `QLambda/Linear/FragmentStepCongruence.lean`

```

theorem fragment_step_congruence_ite_scrutinee {Gamma Delta Delta_1 Delta_2 A B B' T E}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hA : Ty.SemanticFragment A)
  (cB : FragCert Gamma Delta_1 B .bit) (cB' : FragCert Gamma Delta_1 B' .bit)
  (cT : FragCert Gamma Delta_2 T A) (cE : FragCert Gamma Delta_2 E A)
  (h : FragCert.denote cB = FragCert.denote cB') :
  FragCert.denote (.ite hGamma hDelta hs hA cB cT cE) =
    FragCert.denote (.ite hGamma hDelta hs hA cB' cT cE) := by
simp only [FragCert.denote_ite_eq, h]

```

### 5.3.516 The fragment one-step reduction congruence conditional then

**Statement.** If every unrestricted variable of  $\Gamma$  has bit type; every cell of the linear context  $\Delta$  is occupied by a fragment type;  $\Delta$  splits into the left part  $\Delta_1$  and the right part  $\Delta_2$ ; and  $A$  lies in the semantic fragment, then the denotation of `.ite h $\Gamma$  h $\Delta$  hs hA cB cT cE` equals the denotation of `.ite h $\Gamma$  h $\Delta$  hs hA cB cT' cE`.

**Proof.** The goal is simplified using the formula for the denotation of the conditional and the hypothesis that `FragCert.denote cT = FragCert.denote cT'`.

#### Lean 4 source `QLambda/Linear/FragmentStepCongruence.lean`

```

theorem fragment_step_congruence_ite_then {Gamma Delta Delta_1 Delta_2 A B T T' E}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hA : Ty.SemanticFragment A)
  (cB : FragCert Gamma Delta_1 B .bit)
  (cT : FragCert Gamma Delta_2 T A) (cT' : FragCert Gamma Delta_2 T' A)
  (cE : FragCert Gamma Delta_2 E A)
  (h : FragCert.denote cT = FragCert.denote cT') :
  FragCert.denote (.ite hGamma hDelta hs hA cB cT cE) =
    FragCert.denote (.ite hGamma hDelta hs hA cB cT' cE) := by
simp only [FragCert.denote_ite_eq, h]

```

### 5.3.517 The fragment one-step reduction congruence conditional else

**Statement.** If every unrestricted variable of  $\Gamma$  has bit type; every cell of the linear context  $\Delta$  is occupied by a fragment type;  $\Delta$  splits into the left part  $\Delta_1$  and the right part  $\Delta_2$ ; and  $A$  lies in the semantic fragment, then the denotation of  $\text{.ite } h\Gamma \ h\Delta \ hs \ hA \ cB \ cT \ cE$  equals the denotation of  $\text{.ite } h\Gamma \ h\Delta \ hs \ hA \ cB \ cT \ cE'$ .

**Proof.** The goal is simplified using the formula for the denotation of the conditional and the hypothesis that  $\text{FragCert.denote } cE = \text{FragCert.denote } cE'$ .

#### Lean 4 source `QLambda/Linear/FragStepCongruence.lean`

```
theorem fragment_step_congruence_ite_else {Gamma Delta Delta_1 Delta_2 A B T E E'}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hA : Ty.SemanticFragment A)
  (cB : FragCert Gamma Delta_1 B .bit) (cT : FragCert Gamma Delta_2 T A)
  (cE : FragCert Gamma Delta_2 E A) (cE' : FragCert Gamma Delta_2 E' A)
  (h : FragCert.denote cE = FragCert.denote cE') :
  FragCert.denote (.ite hGamma hDelta hs hA cB cT cE) =
    FragCert.denote (.ite hGamma hDelta hs hA cB cT cE') := by
  simp only [FragCert.denote_ite_eq, h]
```

### 5.3.518 The fragment one-step reduction congruence pair left

**Statement.** If every unrestricted variable of  $\Gamma$  has bit type; every cell of the linear context  $\Delta$  is occupied by a fragment type;  $\Delta$  splits into the left part  $\Delta_1$  and the right part  $\Delta_2$ ; and  $A$  is a first-order type, then the denotation of  $\text{.pair } h\Gamma \ h\Delta \ hs \ hA \ hB \ cM \ cN$  equals the denotation of  $\text{.pair } h\Gamma \ h\Delta \ hs \ hA \ hB \ cM' \ cN$ .

**Proof.** The goal is simplified using the formula for the denotation of a pair and the hypothesis that  $\text{FragCert.denote } cM = \text{FragCert.denote } cM'$ .

#### Lean 4 source `QLambda/Linear/FragStepCongruence.lean`

```
theorem fragment_step_congruence_pair_left {Gamma Delta Delta_1 Delta_2 A B M M' N}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hA : Ty.FirstOrder A) (hB : Ty.FirstOrder B)
  (cM : FragCert Gamma Delta_1 M A) (cM' : FragCert Gamma Delta_1 M' A)
  (cN : FragCert Gamma Delta_2 N B)
  (h : FragCert.denote cM = FragCert.denote cM') :
  FragCert.denote (.pair hGamma hDelta hs hA hB cM cN) =
    FragCert.denote (.pair hGamma hDelta hs hA hB cM' cN) := by
  simp only [FragCert.denote_pair_eq, h]
```

### 5.3.519 The fragment one-step reduction congruence pair right

**Statement.** If every unrestricted variable of  $\Gamma$  has bit type; every cell of the linear context  $\Delta$  is occupied by a fragment type;  $\Delta$  splits into the left part  $\Delta_1$  and the right part  $\Delta_2$ ; and  $A$  is a first-order type, then the denotation of  $\text{.pair } h\Gamma \ h\Delta \ hs \ hA \ hB \ cM \ cN$  equals the denotation of  $\text{.pair } h\Gamma \ h\Delta \ hs \ hA \ hB \ cM \ cN'$ .

**Proof.** The goal is simplified using the formula for the denotation of a pair and the hypothesis that  $\text{FragCert.denote } cN = \text{FragCert.denote } cN'$ .

### Lean 4 source `QLambda/Linear/FragmentStepCongruence.lean`

```
theorem fragment_step_congruence_pair_right {Gamma Delta Delta_1 Delta_2 A B M N N'}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hA : Ty.FirstOrder A) (hB : Ty.FirstOrder B)
  (cM : FragCert Gamma Delta_1 M A)
  (cN : FragCert Gamma Delta_2 N B) (cN' : FragCert Gamma Delta_2 N' B)
  (h : FragCert.denote cN = FragCert.denote cN') :
  FragCert.denote (.pair hGamma hDelta hs hA hB cM cN) =
    FragCert.denote (.pair hGamma hDelta hs hA hB cM cN') := by
  simp only [FragCert.denote_pair_eq, h]
```

#### 5.3.520 The fragment one-step reduction congruence pair elimination scrutinee

**Statement.** If every unrestricted variable of  $\Gamma$  has bit type; every cell of the linear context  $\Delta$  is occupied by a fragment type;  $\Delta$  splits into the left part  $\Delta_1$  and the right part  $\Delta_2$ ; and  $A$  is a first-order type, then the denotation of `.unpair h $\Gamma$  h $\Delta$  hs hA hB hC cM cK` equals the denotation of `.unpair h $\Gamma$  h $\Delta$  hs hA hB hC cM' cK`.

**Proof.** The goal is simplified using the formula for the denotation of the pair elimination and the hypothesis that `FragCert.denote cM = FragCert.denote cM'`.

### Lean 4 source `QLambda/Linear/FragmentStepCongruence.lean`

```
theorem fragment_step_congruence_unpair_scrutinee {Gamma Delta Delta_1 Delta_2 A B C M
  M' K}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hA : Ty.FirstOrder A) (hB : Ty.FirstOrder B)
  (hC : Ty.SemanticFragment C)
  (cM : FragCert Gamma Delta_1 M (.tensor A B))
  (cM' : FragCert Gamma Delta_1 M' (.tensor A B))
  (cK : FragCert Gamma Delta_2 K (.arrow .lin A (.arrow .lin B C)))
  (h : FragCert.denote cM = FragCert.denote cM') :
  FragCert.denote (.unpair hGamma hDelta hs hA hB hC cM cK) =
    FragCert.denote (.unpair hGamma hDelta hs hA hB hC cM' cK) := by
  simp only [FragCert.denote_unpair_eq, h]
```

#### 5.3.521 The fragment one-step reduction congruence pair elimination continuation

**Statement.** If every unrestricted variable of  $\Gamma$  has bit type; every cell of the linear context  $\Delta$  is occupied by a fragment type;  $\Delta$  splits into the left part  $\Delta_1$  and the right part  $\Delta_2$ ; and  $A$  is a first-order type, then the denotation of `.unpair h $\Gamma$  h $\Delta$  hs hA hB hC cM cK` equals the denotation of `.unpair h $\Gamma$  h $\Delta$  hs hA hB hC cM cK'`.

**Proof.** The goal is simplified using the formula for the denotation of the pair elimination and the hypothesis that `FragCert.denote cK = FragCert.denote cK'`.

### Lean 4 source `QLambda/Linear/FragmentStepCongruence.lean`

```
theorem fragment_step_congruence_unpair_cont {Gamma Delta Delta_1 Delta_2 A B C M K K'
  '}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hA : Ty.FirstOrder A) (hB : Ty.FirstOrder B)
```

```

(hC : Ty.SemanticFragment C)
(cM : FragCert Gamma Delta_1 M (.tensor A B))
(cK : FragCert Gamma Delta_2 K (.arrow .lin A (.arrow .lin B C)))
(cK' : FragCert Gamma Delta_2 K' (.arrow .lin A (.arrow .lin B C)))
(h : FragCert.denote cK = FragCert.denote cK') :
FragCert.denote (.unpair hGamma hDelta hs hA hB hC cM cK) =
  FragCert.denote (.unpair hGamma hDelta hs hA hB hC cM cK') := by
simp only [FragCert.denote_unpair_eq, h]

```

### 5.3.522 The fragment one-step reduction congruence measurement qubit

**Statement.** If every unrestricted variable of  $\Gamma$  has bit type; every cell of the linear context  $\Delta$  is occupied by a fragment type;  $\Delta$  splits into the left part  $\Delta_1$  and the right part  $\Delta_2$ ; and  $A$  lies in the semantic fragment, then the denotation of  $\text{.measure } h\Gamma \ h\Delta \ hs \ hA \ cQ \ cK$  equals the denotation of  $\text{.measure } h\Gamma \ h\Delta \ hs \ hA \ cQ' \ cK$ .

**Proof.** The goal is simplified using the formula for the denotation of the measurement and the hypothesis that  $\text{FragCert.denote } cQ = \text{FragCert.denote } cQ'$ .

#### Lean 4 source `QLambda/Linear/FragStepCongruence.lean`

```

theorem fragment_step_congruence_measure_qubit {Gamma Delta Delta_1 Delta_2 A Q Q' K}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hA : Ty.SemanticFragment A)
  (cQ : FragCert Gamma Delta_1 Q .qubit) (cQ' : FragCert Gamma Delta_1 Q' .qubit)
  (cK : FragCert Gamma Delta_2 K (.arrow .unres .bit (.arrow .lin .qubit A)))
  (h : FragCert.denote cQ = FragCert.denote cQ') :
FragCert.denote (.measure hGamma hDelta hs hA cQ cK) =
  FragCert.denote (.measure hGamma hDelta hs hA cQ' cK) := by
simp only [FragCert.denote_measure_eq, h]

```

### 5.3.523 The fragment one-step reduction congruence measurement continuation

**Statement.** If every unrestricted variable of  $\Gamma$  has bit type; every cell of the linear context  $\Delta$  is occupied by a fragment type;  $\Delta$  splits into the left part  $\Delta_1$  and the right part  $\Delta_2$ ; and  $A$  lies in the semantic fragment, then the denotation of  $\text{.measure } h\Gamma \ h\Delta \ hs \ hA \ cQ \ cK$  equals the denotation of  $\text{.measure } h\Gamma \ h\Delta \ hs \ hA \ cQ \ cK'$ .

**Proof.** The goal is simplified using the formula for the denotation of the measurement and the hypothesis that  $\text{FragCert.denote } cK = \text{FragCert.denote } cK'$ .

#### Lean 4 source `QLambda/Linear/FragStepCongruence.lean`

```

theorem fragment_step_congruence_measure_cont {Gamma Delta Delta_1 Delta_2 A Q K K'}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hA : Ty.SemanticFragment A)
  (cQ : FragCert Gamma Delta_1 Q .qubit)
  (cK : FragCert Gamma Delta_2 K (.arrow .unres .bit (.arrow .lin .qubit A)))
  (cK' : FragCert Gamma Delta_2 K' (.arrow .unres .bit (.arrow .lin .qubit A)))
  (h : FragCert.denote cK = FragCert.denote cK') :
FragCert.denote (.measure hGamma hDelta hs hA cQ cK) =
  FragCert.denote (.measure hGamma hDelta hs hA cQ cK') := by
simp only [FragCert.denote_measure_eq, h]

```

### 5.3.524 Fragment of the measurement step of the congruence of the qubit

**Statement.** MeasStep congruence: equal qubit denotations give equal measure dens. Formally:  $\text{FragCert.denote } (. \text{measure } h\Gamma \ h\Delta \ hs \ hA \ cQ \ cK) = \text{FragCert.denote } (. \text{measure } h\Gamma \ h\Delta \ hs \ hA \ cQ' \ cK).$

**Proof.** This is an instance of the fragment one-step reduction congruence measurement qubit, applied to the hypothesis that every unrestricted variable of  $\Gamma$  has bit type, the hypothesis that every cell of the linear context  $\Delta$  is occupied by a fragment type, the hypothesis that  $\Delta$  splits into the left part  $\Delta_1$  and the right part  $\Delta_2$ , the hypothesis that  $A$  lies in the semantic fragment and the hypothesis that  $\text{FragCert.denote } cQ = \text{FragCert.denote } cQ'.$

#### Lean 4 source `QLambda/Linear/FragmentStepCongruence.lean`

```
theorem fragment_measStep_congruence_qubit {Gamma Delta Delta_1 Delta_2 A Q Q' K}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hA : Ty.SemanticFragment A)
  (cQ : FragCert Gamma Delta_1 Q .qubit) (cQ' : FragCert Gamma Delta_1 Q' .qubit)
  (cK : FragCert Gamma Delta_2 K (.arrow .unres .bit (.arrow .lin .qubit A)))
  (h : FragCert.denote cQ = FragCert.denote cQ') :
  FragCert.denote (.measure hGamma hDelta hs hA cQ cK) =
  FragCert.denote (.measure hGamma hDelta hs hA cQ' cK) :=
fragment_step_congruence_measure_qubit hGamma hDelta hs hA cQ cQ' cK h
```

### 5.3.525 Package: denotational congruence for fragment-admitted Step contexts (app, ite, pair, unpair, measure)

**Statement.** Package: denotational congruence for fragment-admitted Step contexts (app, ite, pair, unpair, measure).

**Proof.** The witness is assembled directly from its components.

#### Lean 4 source `QLambda/Linear/FragmentStepCongruence.lean`

```
theorem fragment_step_congruence_sound :
  (forall {Gamma Delta Delta_1 Delta_2 A B F F' X}
    (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
    (hs : OSplit Delta Delta_1 Delta_2) (hFO : Ty.FirstOrder A)
    (hB : Ty.SemanticFragment B)
    (cF : FragCert Gamma Delta_1 F (.arrow .lin A B))
    (cF' : FragCert Gamma Delta_1 F' (.arrow .lin A B))
    (cX : FragCert Gamma Delta_2 X A),
    FragCert.denote cF = FragCert.denote cF' ->
    FragCert.denote (.appL hGamma hDelta hs hFO hB cF cX) =
    FragCert.denote (.appL hGamma hDelta hs hFO hB cF' cX)) /\
  (forall {Gamma Delta Delta_1 Delta_2 A B F X X'}
    (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
    (hs : OSplit Delta Delta_1 Delta_2) (hFO : Ty.FirstOrder A)
    (hB : Ty.SemanticFragment B)
    (cF : FragCert Gamma Delta_1 F (.arrow .lin A B))
    (cX : FragCert Gamma Delta_2 X A) (cX' : FragCert Gamma Delta_2 X' A),
    FragCert.denote cX = FragCert.denote cX' ->
    FragCert.denote (.appL hGamma hDelta hs hFO hB cF cX) =
    FragCert.denote (.appL hGamma hDelta hs hFO hB cF cX')) /\
  (forall {Gamma Delta DeltaF DeltaX B F F' X}
```

```

(hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
(hs : OSplit Delta DeltaF DeltaX) (hN : AllNone DeltaX)
(hB : Ty.SemanticFragment B)
(cF : FragCert Gamma DeltaF F (.arrow .unres .bit B))
(cF' : FragCert Gamma DeltaF F' (.arrow .unres .bit B))
(cX : FragCert Gamma DeltaX X .bit),
FragCert.denote cF = FragCert.denote cF' ->
FragCert.denote (.appU hGamma hDelta hs hN hB cF cX) =
  FragCert.denote (.appU hGamma hDelta hs hN hB cF' cX)) /\
(forall {Gamma Delta DeltaF DeltaX B F X X'}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta DeltaF DeltaX) (hN : AllNone DeltaX)
  (hB : Ty.SemanticFragment B)
  (cF : FragCert Gamma DeltaF F (.arrow .unres .bit B))
  (cX : FragCert Gamma DeltaX X .bit) (cX' : FragCert Gamma DeltaX X' .bit),
FragCert.denote cX = FragCert.denote cX' ->
FragCert.denote (.appU hGamma hDelta hs hN hB cF cX) =
  FragCert.denote (.appU hGamma hDelta hs hN hB cF' cX')) /\
(forall {Gamma Delta Delta_1 Delta_2 A B B' T E}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hA : Ty.SemanticFragment A)
  (cB : FragCert Gamma Delta_1 B .bit) (cB' : FragCert Gamma Delta_1 B' .bit)
  (cT : FragCert Gamma Delta_2 T A) (cE : FragCert Gamma Delta_2 E A),
FragCert.denote cB = FragCert.denote cB' ->
FragCert.denote (.ite hGamma hDelta hs hA cB cT cE) =
  FragCert.denote (.ite hGamma hDelta hs hA cB' cT cE)) /\
(forall {Gamma Delta Delta_1 Delta_2 A B T T' E}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hA : Ty.SemanticFragment A)
  (cB : FragCert Gamma Delta_1 B .bit)
  (cT : FragCert Gamma Delta_2 T A) (cT' : FragCert Gamma Delta_2 T' A)
  (cE : FragCert Gamma Delta_2 E A),
FragCert.denote cT = FragCert.denote cT' ->
FragCert.denote (.ite hGamma hDelta hs hA cB cT cE) =
  FragCert.denote (.ite hGamma hDelta hs hA cB cT' cE)) /\
(forall {Gamma Delta Delta_1 Delta_2 A B T E E'}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hA : Ty.SemanticFragment A)
  (cB : FragCert Gamma Delta_1 B .bit) (cT : FragCert Gamma Delta_2 T A)
  (cE : FragCert Gamma Delta_2 E A) (cE' : FragCert Gamma Delta_2 E' A),
FragCert.denote cE = FragCert.denote cE' ->
FragCert.denote (.ite hGamma hDelta hs hA cB cT cE) =
  FragCert.denote (.ite hGamma hDelta hs hA cB cT cE')) /\
(forall {Gamma Delta Delta_1 Delta_2 A B M M' N}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hA : Ty.FirstOrder A) (hB : Ty.FirstOrder
B)
  (cM : FragCert Gamma Delta_1 M A) (cM' : FragCert Gamma Delta_1 M' A)
  (cN : FragCert Gamma Delta_2 N B),
FragCert.denote cM = FragCert.denote cM' ->
FragCert.denote (.pair hGamma hDelta hs hA hB cM cN) =
  FragCert.denote (.pair hGamma hDelta hs hA hB cM' cN)) /\
(forall {Gamma Delta Delta_1 Delta_2 A B M N N'}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hA : Ty.FirstOrder A) (hB : Ty.FirstOrder
B)

```

```

(cM : FragCert Gamma Delta_1 M A)
(cN : FragCert Gamma Delta_2 N B) (cN' : FragCert Gamma Delta_2 N' B),
FragCert.denote cN = FragCert.denote cN' ->
FragCert.denote (.pair hGamma hDelta hs hA hB cM cN) =
  FragCert.denote (.pair hGamma hDelta hs hA hB cM cN')) /\
(forall {Gamma Delta Delta_1 Delta_2 A B C M M' K}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hA : Ty.FirstOrder A) (hB : Ty.FirstOrder
B)
  (hC : Ty.SemanticFragment C)
  (cM : FragCert Gamma Delta_1 M (.tensor A B))
  (cM' : FragCert Gamma Delta_1 M' (.tensor A B))
  (cK : FragCert Gamma Delta_2 K (.arrow .lin A (.arrow .lin B C))),
FragCert.denote cM = FragCert.denote cM' ->
FragCert.denote (.unpair hGamma hDelta hs hA hB hC cM cK) =
  FragCert.denote (.unpair hGamma hDelta hs hA hB hC cM' cK)) /\
(forall {Gamma Delta Delta_1 Delta_2 A B C M K K'}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hA : Ty.FirstOrder A) (hB : Ty.FirstOrder
B)
  (hC : Ty.SemanticFragment C)
  (cM : FragCert Gamma Delta_1 M (.tensor A B))
  (cK : FragCert Gamma Delta_2 K (.arrow .lin A (.arrow .lin B C)))
  (cK' : FragCert Gamma Delta_2 K' (.arrow .lin A (.arrow .lin B C))),
FragCert.denote cK = FragCert.denote cK' ->
FragCert.denote (.unpair hGamma hDelta hs hA hB hC cM cK) =
  FragCert.denote (.unpair hGamma hDelta hs hA hB hC cM cK')) /\
(forall {Gamma Delta Delta_1 Delta_2 A Q Q' K}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hA : Ty.SemanticFragment A)
  (cQ : FragCert Gamma Delta_1 Q .qubit) (cQ' : FragCert Gamma Delta_1 Q' .qubit
)
  (cK : FragCert Gamma Delta_2 K (.arrow .unres .bit (.arrow .lin .qubit A))),
FragCert.denote cQ = FragCert.denote cQ' ->
FragCert.denote (.measure hGamma hDelta hs hA cQ cK) =
  FragCert.denote (.measure hGamma hDelta hs hA cQ' cK)) /\
(forall {Gamma Delta Delta_1 Delta_2 A Q K K'}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hA : Ty.SemanticFragment A)
  (cQ : FragCert Gamma Delta_1 Q .qubit)
  (cK : FragCert Gamma Delta_2 K (.arrow .unres .bit (.arrow .lin .qubit A)))
  (cK' : FragCert Gamma Delta_2 K' (.arrow .unres .bit (.arrow .lin .qubit A))),
FragCert.denote cK = FragCert.denote cK' ->
FragCert.denote (.measure hGamma hDelta hs hA cQ cK) =
  FragCert.denote (.measure hGamma hDelta hs hA cQ cK')) :=
<fun {_Gamma} {_Delta} {_Delta_1} {_Delta_2} {_A} {_B} {_F} {_F'}} {_X} hGamma hDelta
  hs hFO hB cF cF' cX h =>
  fragment_step_congruence_appL_fun hGamma hDelta hs hFO hB cF cF' cX h,
fun {_Gamma} {_Delta} {_Delta_1} {_Delta_2} {_A} {_B} {_F} {_X} {_X'}} hGamma
hDelta hs hFO hB cF cX cX' h =>
  fragment_step_congruence_appL_arg hGamma hDelta hs hFO hB cF cX cX' h,
fun {_Gamma} {_Delta} {_DeltaF} {_DeltaX} {_B} {_F} {_F'}} {_X} hGamma hDelta hs hN
hB cF cF' cX h =>
  fragment_step_congruence_appU_fun hGamma hDelta hs hN hB cF cF' cX h,
fun {_Gamma} {_Delta} {_DeltaF} {_DeltaX} {_B} {_F} {_X} {_X'}} hGamma hDelta hs hN
hB cF cX cX' h =>

```

```

fragment_step_congruence_appU_arg hGamma hDelta hs hN hB cF cX cX' h,
fun {_Gamma} {_Delta} {_Delta_1} {_Delta_2} {_A} {_B} {_B'} {_T} {_E} hGamma
hDelta hs hA cB cB' cT cE h =>
fragment_step_congruence_ite_scrutineer hGamma hDelta hs hA cB cB' cT cE h,
fun {_Gamma} {_Delta} {_Delta_1} {_Delta_2} {_A} {_B} {_T} {_T'} {_E} hGamma
hDelta hs hA cB cT cT' cE h =>
fragment_step_congruence_ite_then hGamma hDelta hs hA cB cT cT' cE h,
fun {_Gamma} {_Delta} {_Delta_1} {_Delta_2} {_A} {_B} {_T} {_E} {_E'} hGamma
hDelta hs hA cB cT cE cE' h =>
fragment_step_congruence_ite_else hGamma hDelta hs hA cB cT cE cE' h,
fun {_Gamma} {_Delta} {_Delta_1} {_Delta_2} {_A} {_B} {_M} {_M'} {_N} hGamma
hDelta hs hA hB cM cM' cN h =>
fragment_step_congruence_pair_left hGamma hDelta hs hA hB cM cM' cN h,
fun {_Gamma} {_Delta} {_Delta_1} {_Delta_2} {_A} {_B} {_M} {_N} {_N'} hGamma
hDelta hs hA hB cM cN cN' h =>
fragment_step_congruence_pair_right hGamma hDelta hs hA hB cM cN cN' h,
fun {_Gamma} {_Delta} {_Delta_1} {_Delta_2} {_A} {_B} {_C} {_M} {_M'} {_K} hGamma
hDelta hs hA hB hC cM cM' cK h =>
fragment_step_congruence_unpair_scrutineer hGamma hDelta hs hA hB hC cM cM' cK h,
fun {_Gamma} {_Delta} {_Delta_1} {_Delta_2} {_A} {_B} {_C} {_M} {_K} {_K'} hGamma
hDelta hs hA hB hC cM cK cK' h =>
fragment_step_congruence_unpair_cont hGamma hDelta hs hA hB hC cM cK cK' h,
fun {_Gamma} {_Delta} {_Delta_1} {_Delta_2} {_A} {_Q} {_Q'} {_K} hGamma hDelta hs
hA cQ cQ' cK h =>
fragment_step_congruence_measure_qubit hGamma hDelta hs hA cQ cQ' cK h,
fun {_Gamma} {_Delta} {_Delta_1} {_Delta_2} {_A} {_Q} {_K} {_K'} hGamma hDelta hs
hA cQ cK cK' h =>
fragment_step_congruence_measure_cont hGamma hDelta hs hA cQ cK cK' h>

```

### 5.3.526 Complete fragment-admitted Step soundness package

**Statement.** Complete fragment-admitted Step soundness package: closed linear/unres identity  $\beta$ , constant unrestricted subst  $\beta$ , closed unpair  $\beta$ , and the full congruence suite. Excludes fix/fold/unfold (outside the fragment).

**Proof.** The witness is assembled directly from its components, using the fragment of the linear  $\beta$ -reduction of the identity of the unit.

#### Lean 4 source `QLambda/Linear/FragmentStepCongruence.lean`

```

theorem fragment_step_denote_sound_complete :
(FragCert.denote fragCert_appL_id_unit =
  FragCert.denote FragCert.closed_unit_cert) /\
(forall b, FragCert.denote (fragCert_appL_id_bit b) =
  FragCert.denote (FragCert.closed_bitLit_cert b)) /\
(forall b, FragCert.denote (fragCert_appU_id_bit b) =
  FragCert.denote (FragCert.closed_bitLit_cert b)) /\
(forall c b, FragCert.denote (fragCert_appU_const_bit c b) =
  FragCert.denote (FragCert.closed_bitLit_cert c)) /\
(forall b, FragCert.denote (fragCert_appU_const_unit b) =
  FragCert.denote FragCert.closed_unit_cert) /\
(forall {K : Term}
  (cK : FragCert.Closed K
    (.arrow .lin .unit (.arrow .lin .unit .unit))),
  FragCert.denote

```



```

    (.unpair CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil
     Ty.FirstOrder.unit Ty.FirstOrder.unit Ty.SemanticFragment.unit
     (.pair CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil
      Ty.FirstOrder.unit Ty.FirstOrder.unit
      FragCert.closed_unit_cert FragCert.closed_unit_cert)
     cK) =
  FragCert.denote
    (.appL CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil
     Ty.FirstOrder.unit Ty.SemanticFragment.unit
     (.appL CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil
      Ty.FirstOrder.unit
      (Ty.SemanticFragment.arrowLin Ty.FirstOrder.unit
       Ty.SemanticFragment.unit)
      cK FragCert.closed_unit_cert)
     FragCert.closed_unit_cert)) /\
Nonempty
  (forall {Gamma Delta Delta_1 Delta_2 A B F F' X}
   (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
   (hs : OSplit Delta Delta_1 Delta_2) (hFO : Ty.FirstOrder A)
   (hB : Ty.SemanticFragment B)
   (cF : FragCert Gamma Delta_1 F (.arrow .lin A B))
   (cF' : FragCert Gamma Delta_1 F' (.arrow .lin A B))
   (cX : FragCert Gamma Delta_2 X A),
   FragCert.denote cF = FragCert.denote cF' ->
   FragCert.denote (.appL hGamma hDelta hs hFO hB cF cX) =
   FragCert.denote (.appL hGamma hDelta hs hFO hB cF' cX)) :=
<fragment_betaL_id_unit, fragment_betaL_id_bit, fragment_betaU_id_bit,
 fragment_substUnres_const_denote_bit, fragment_substUnres_const_denote_unit,
 fun {_K} cK => fragment_unpair_beta_unit cK,
 <fun {_Gamma} {_Delta} {_Delta_1} {_Delta_2} {_A} {_B} {_F} {_F'} {_X}
  hGamma hDelta hs hFO hB cF cF' cX h =>
  fragment_step_congruence_appL_fun hGamma hDelta hs hFO hB cF cF' cX h>>

```

### 5.3.527 The fragment one-step reduction denotation soundness upgraded

**Statement.** Upgraded soundness package: closed linear and unrestricted identity  $\beta$  plus the full congruence suite `fragment_step_congruence_sound`.

**Proof.** The witness is assembled directly from its components, using the fragment of the linear  $\beta$ -reduction of the identity of the unit.

#### Lean 4 source `QLambda/Linear/FragmentStepCongruence.lean`

```

theorem fragment_step_denote_sound_upgraded :
  (FragCert.denote fragCert_appL_id_unit =
   FragCert.denote FragCert.closed_unit_cert) /\
  (forall b, FragCert.denote (fragCert_appL_id_bit b) =
   FragCert.denote (FragCert.closed_bitLit_cert b)) /\
  (forall b, FragCert.denote (fragCert_appU_id_bit b) =
   FragCert.denote (FragCert.closed_bitLit_cert b)) /\
Nonempty
  ((forall {Gamma Delta Delta_1 Delta_2 A B F F' X}
   (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
   (hs : OSplit Delta Delta_1 Delta_2) (hFO : Ty.FirstOrder A)
   (hB : Ty.SemanticFragment B)

```

```

(cF : FragCert Gamma Delta_1 F (.arrow .lin A B))
(cF' : FragCert Gamma Delta_1 F' (.arrow .lin A B))
(cX : FragCert Gamma Delta_2 X A),
FragCert.denote cF = FragCert.denote cF' ->
  FragCert.denote (.appL hGamma hDelta hs hFO hB cF cX) =
    FragCert.denote (.appL hGamma hDelta hs hFO hB cF' cX)) /\
(forall {Gamma Delta Delta_1 Delta_2 A B F X X'}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hFO : Ty.FirstOrder A)
  (hB : Ty.SemanticFragment B)
  (cF : FragCert Gamma Delta_1 F (.arrow .lin A B))
  (cX : FragCert Gamma Delta_2 X A) (cX' : FragCert Gamma Delta_2 X' A),
FragCert.denote cX = FragCert.denote cX' ->
  FragCert.denote (.appL hGamma hDelta hs hFO hB cF cX) =
    FragCert.denote (.appL hGamma hDelta hs hFO hB cF cX')) :=
<fragment_betaL_id_unit, fragment_betaL_id_bit, fragment_betaU_id_bit,
  <fragment_step_congruence_sound.1, fragment_step_congruence_sound.2.1>>

```

### 5.3.528 Basis bra of the sandwich of the basis ket

**Statement.** For indexes  $k, i$ , a matrix  $\rho$ : an explicit expression in the basis bra and the basis ket equals if  $k = i$  then  $\rho$  else 0.

**Proof.** The argument splits on the relevant condition. An equation between variables is used to substitute one for the other. The key step rewrites with associativity of matrix multiplication, the adjoint of a product, the basis bra of a product of the basis ket for countable Choi sums and the basis bra of a product of the basis ket for countable Choi sums, assuming ne.

#### Lean 4 source `QLambda/Linear/FragmentSubstBeta.lean`

```

private theorem basisBra_sandwich_basisKet (k i : Fin 2)
  (? : Matrix (Fin 1) (Fin 1) ?) :
  SigmaMon.ChoiSum.basisBra k *
    (SigmaMon.ChoiSum.basisKet i * ? * (SigmaMon.ChoiSum.basisKet i)?) *
    (SigmaMon.ChoiSum.basisBra k)? =
    if k = i then ? else 0 := by
  have hfuse :
    SigmaMon.ChoiSum.basisBra k *
      (SigmaMon.ChoiSum.basisKet i * ? * (SigmaMon.ChoiSum.basisKet i)?) *
      (SigmaMon.ChoiSum.basisBra k)? =
      (SigmaMon.ChoiSum.basisBra k * SigmaMon.ChoiSum.basisKet i) * ? *
      ((SigmaMon.ChoiSum.basisBra k * SigmaMon.ChoiSum.basisKet i)?) := by
    simp [Matrix.mul_assoc, <- Matrix.conjTranspose_mul]
  rw [hfuse]
  by_cases h : k = i
  * subst h
  rw [ite_eq_left rfl, SigmaMon.ChoiSum.basisBra_mul_basisKet k]
  simp
  * rw [ite_eq_right h, SigmaMon.ChoiSum.basisBra_mul_basisKet_of_ne h]
  simp

```

### 5.3.529 Discarding a computational-basis preparation is the identity channel

**Statement.** Discarding a computational-basis preparation is the identity channel.

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with the underlying completely positive map of a composite for superoperators, the definition of the discard two, the definition of the isometric basis preparation and the definition of the identity. Every finite index is checked separately.

**Lean 4 source** [QLambda/Linear/FragmentSubstBeta.lean](#)

```
theorem discardTwo_comp_isometricBasisPrep (i : Fin 2) :
  Superoperator.comp SigmaMon.ChoiSum.discardTwo
    (SigmaMon.ChoiSum.isometricBasisPrep i) =
    Superoperator.identity 1 := by
  apply Superoperator.ext
  apply CPMat.ext_apply
  intro ?
  simp only [Superoperator.cp_comp, SigmaMon.ChoiSum.discardTwo,
    SigmaMon.ChoiSum.isometricBasisPrep, Superoperator.identity,
    CPMat.applyMat_comp, CPMat.applyMat_ofKraus, CPMat.applyMat_identity,
    KrausFamily.applyMat_cons, KrausFamily.applyMat_nil, add_zero]
  rw [basisBra_sandwich_basisKet 0 i, basisBra_sandwich_basisKet 1 i]
  fin_cases i <|> simp
```

### 5.3.530 Discarding a bit literal collapses to the Day unit identity

**Statement.** Discarding a bit literal collapses to the Day unit identity. Formally:  $\text{Hom.comp bitDiscard (bitLitHom } b) = \text{Hom.id dayTensorUnit}$ .

**Proof.** The hypotheses are unpacked into their constituent data. The key step rewrites with the definition of the bit prepare, the fact that the Yoneda image preserves composition, the fact that the Yoneda image preserves identities and the fact that discarding a computational-basis preparation is the identity channel.

**Lean 4 source** [QLambda/Linear/FragmentSubstBeta.lean](#)

```
theorem bitDiscard_comp_bitLitHom (b : Bool) :
  Hom.comp bitDiscard (bitLitHom b) = Hom.id dayTensorUnit := by
  have hb :
    Superoperator.comp SigmaMon.ChoiSum.discardTwo (bitPrepare b) =
    Superoperator.identity 1 := by
    cases b <|> simp only [bitPrepare]
    * exact discardTwo_comp_isometricBasisPrep 0
    * exact discardTwo_comp_isometricBasisPrep 1
  change Hom.comp (yonedaMap SigmaMon.ChoiSum.discardTwo)
    (yonedaMap (bitPrepare b)) = Hom.id dayTensorUnit
  rw [ <- yonedaMap_comp, hb, yonedaMap_id]
```

### 5.3.531 The classical-bit counit is physical discard after inclusion

**Statement.** The classical-bit counit is physical discard after inclusion. Formally:  $\text{classicalBitWeakening} = \text{Hom.comp bitDiscard classicalBitInclusion}$ .

**Proof.** Both sides are compared pointwise (by extensionality).

**Lean 4 source** [QLambda/Linear/FragmentSubstBeta.lean](#)

```

theorem classicalBitWeakening_eq_bitDiscard :
  classicalBitWeakening = Hom.comp bitDiscard classicalBitInclusion := by
  ext n x
  rfl

```

### 5.3.532 Classicalising then discarding a bit literal is the Day unit identity

**Statement.** Classicalising then discarding a bit literal is the Day unit identity. Formally:  $\text{Hom.comp classicalBitWeakening (Hom.comp bitClassicalize (bitLitHom b))} = \text{Hom.id dayTensorUnit}$ .

**Proof.** The key step rewrites with the fact that the classical-bit counit is physical discard after inclusion, the fact that composition for module morphisms is associative, the fact that bit literals are already classical: inclusion recovers them after classicalization and the discarding a bit literal collapses to the Day unit identity.

#### Lean 4 source [QLambda/Linear/FragmentSubstBeta.lean](#)

```

theorem classicalBitWeakening_comp_bitClassicalize_bitLit (b : Bool) :
  Hom.comp classicalBitWeakening (Hom.comp bitClassicalize (bitLitHom b)) =
    Hom.id dayTensorUnit := by
  rw [classicalBitWeakening_eq_bitDiscard,
    <- Hom.comp_assoc bitDiscard classicalBitInclusion
      (Hom.comp bitClassicalize (bitLitHom b)),
    classicalBitInclusion_comp_bitClassicalize_bitLit b]
  exact bitDiscard_comp_bitLitHom b

/-! ## The singleton bit context discards through the classical counit -/

```

### 5.3.533 On $\Gamma = [\text{bit}]$ , $\Delta = []$ the combined discard is the counit after the two unitors that strip the empty context slots

**Statement.** On  $\Gamma = [\text{bit}]$ ,  $\Delta = []$  the combined discard is the counit after the two unitors that strip the empty context slots.

**Proof.** The key step rewrites with the fact that the left unitor of the unit equals the right unitor of the unit, the naturality of the right unitor and the fact that composition for module morphisms is associative.

#### Lean 4 source [QLambda/Linear/FragmentSubstBeta.lean](#)

```

theorem combinedAllDiscard_bit_nil (hGamma : CtxUAllBit [Ty.bit])
  (hDelta : AllNone ([] : List (Option Ty))) :
  FragmentContext.combinedAllDiscard hGamma hDelta =
    Hom.comp classicalBitWeakening
      (Hom.comp (DayTensor.rightUnitor classicalBitModule)
        (DayTensor.rightUnitor
          (dayTensor classicalBitModule dayTensorUnit))) := by
  have hconv :
    FragmentContext.combinedAllDiscard hGamma hDelta =
      Hom.comp (DayTensor.leftUnitor dayTensorUnit)
        (DayTensor.map
          (Hom.comp (DayTensor.leftUnitor dayTensorUnit)
            (DayTensor.map classicalBitWeakening (Hom.id dayTensorUnit)))
          (Hom.id dayTensorUnit)) := rfl

```

```

rw [hconv, leftUnitor_unit_eq_rightUnitor_unit, rightUnitor_natural,
    rightUnitor_natural, Hom.comp_assoc]

/-! ## Closed b for post-processing bodies -/

```

### 5.3.534 Pull a post-processing map out of a three-fold composite

**Statement.** Pull a post-processing map out of a three-fold composite. Formally:  $\text{Hom.comp } (\text{Hom.comp } (\text{Hom.comp } k \ r) \ m) \ p = \text{Hom.comp } k \ (\text{Hom.comp } (\text{Hom.comp } r \ m) \ p)$ .

**Proof.** The goal is simplified using the fact that composition for module morphisms is associative.

#### Lean 4 source `QLambda/Linear/FragmentSubstBeta.lean`

```

private theorem post_regroup {A_0 A_1 A_2 A_3 A? : Module}
  (k : Hom A_3 A?) (r : Hom A_2 A_3) (m : Hom A_1 A_2) (p : Hom A_0 A_1) :
  Hom.comp (Hom.comp (Hom.comp k r) m) p =
  Hom.comp k (Hom.comp (Hom.comp r m) p) := by
  simp only [Hom.comp_assoc]

```

### 5.3.535 Closed linear $\beta$ for a body of the form $k \circ (\text{projection of the bound variable})$

**Statement.** Closed linear  $\beta$  for a body of the form  $k \circ (\text{projection of the bound variable})$ ;  $k = \text{id}$  is the identity body already proved in `FragmentIdentityBeta`.

**Proof.** The key step rewrites with the fact that composition for module morphisms is associative, the definition of the  $\varphi$ , the hypothesis that `body` equals an explicit expression in the composition, the left unitor, the fragment module and the functorial action and the definition of the closed term point.

#### Lean 4 source `QLambda/Linear/FragmentSubstBeta.lean`

```

theorem fragment_betaL_closed_post {A : Ty} {N : Module}
  (hA : Ty.FirstOrder A) (k : Hom (fragmentModule A) N)
  (body : Hom
    (DayTensor dayTensorUnit (dayTensor (fragmentModule A) dayTensorUnit)) N)
  (f : Hom dayTensorUnit (fragmentModule A))
  (hbody :
    body =
      Hom.comp k
        (Hom.comp (DayTensor.leftUnitor (fragmentModule A))
          (DayTensor.map (Hom.id dayTensorUnit)
            (DayTensor.rightUnitor (fragmentModule A))))) :
  Hom.comp (FragmentContext.evalFragmentFirstOrder hA N)
    (Hom.comp
      (DayTensor.map (FragmentContext.abstractLinear hA body)
        (FragmentContext.closedPoint f))
      (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil)) =
  FragmentContext.closedPoint (Hom.comp k f) := by
let ? : Hom (FragmentContext.combined [] [])
  (internalHomRepresentable A.hilbertDim N) :=
  FragmentContext.abstractLinear hA body
have hfactor :
  DayTensor.map ? (FragmentContext.closedPoint f) =
  Hom.comp (DayTensor.map ? (Hom.id (fragmentModule A)))

```

```

      (DayTensor.map (Hom.id (FragmentContext.combined [] []))
        (FragmentContext.closedPoint f)) := by
    simp only [Hom.comp_id, Hom.id_comp] using
      DayTensor.map_comp ? (Hom.id (FragmentContext.combined [] []))
        (Hom.id (fragmentModule A)) (FragmentContext.closedPoint f)
  change Hom.comp (FragmentContext.evalFragmentFirstOrder hA N)
    (Hom.comp (DayTensor.map ? (FragmentContext.closedPoint f))
      (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil)) =
    FragmentContext.closedPoint (Hom.comp k f)
  rw [hfactor]
  have hreassoc :
    Hom.comp (FragmentContext.evalFragmentFirstOrder hA N)
      (Hom.comp
        (Hom.comp (DayTensor.map ? (Hom.id (fragmentModule A)))
          (DayTensor.map (Hom.id (FragmentContext.combined [] []))
            (FragmentContext.closedPoint f)))
        (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil)) =
    Hom.comp
      (Hom.comp (FragmentContext.evalFragmentFirstOrder hA N)
        (DayTensor.map ? (Hom.id (fragmentModule A))))
      (Hom.comp
        (DayTensor.map (Hom.id (FragmentContext.combined [] []))
          (FragmentContext.closedPoint f))
        (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil)) := by
    rw [Hom.comp_assoc, Hom.comp_assoc, <- Hom.comp_assoc]
  rw [hreassoc]
  have hb :
    Hom.comp (FragmentContext.evalFragmentFirstOrder hA N)
      (DayTensor.map ? (Hom.id (fragmentModule A))) =
    Hom.comp body
      (FragmentContext.moveArgumentIntoLinear dayTensorUnit dayTensorUnit
        (fragmentModule A)) := by
    dsimp only [?]
    exact FragmentContext.evalFragmentFirstOrder_abstractLinear hA body
  rw [hb, hbody]
  refine Eq.trans (post_regroup _ _ _ _) ?_
  refine Eq.trans
    (congrArg (Hom.comp k) (closed_identity_move_cancel_frag f)) ?_
  simp only [FragmentContext.closedPoint]
  exact Hom.comp_assoc k f FragmentContext.combinedClosedCollapse

```

### 5.3.536 Regroup the unrestricted composite so the body unitors meet the move and the classicalisation meets the closed argument

**Statement.** Regroup the unrestricted composite so the body unitors meet the move and the classicalisation meets the closed argument.

**Proof.** The goal is simplified using the fact that composition for module morphisms is associative.

#### Lean 4 source `QLambda/Linear/FragmentSubstBeta.lean`

```

private theorem unres_post_regroup {A_0 A_1 A_2 A_3 A? A? A? : Module}
  (i : Hom A? A?) (r : Hom A? A?) (m : Hom A_3 A?) (c : Hom A_2 A_3)
  (p : Hom A_1 A_2) (s : Hom A_0 A_1) :
  Hom.comp (Hom.comp (Hom.comp i r) (Hom.comp m c)) (Hom.comp p s) =

```

```

Hom.comp i (Hom.comp (Hom.comp r m) (Hom.comp (Hom.comp c p) s)) := by
simp only [Hom.comp_assoc]

```

### 5.3.537 Cancellation of the unrestricted move

**Statement.** Cancellation of the unrestricted move, split and classicalisation against a closed argument, for a body that post-processes the classical variable.

**Proof.** The key step rewrites with the fact that empty combined split is the Day-unit pairing  $\lambda^{-1} \otimes \lambda^{-1}$ , the definition of the closed term point, the fact that composition for module morphisms is associative and the fact that closed identity move/split cancellation against a Day-unit point.

#### Lean 4 source `QLambda/Linear/FragmentSubstBeta.lean`

```

private theorem closed_unres_post_cancel {N : Module}
(k : Hom classicalBitModule N)
(f : Hom dayTensorUnit (fragmentModule .bit)) :
Hom.comp
  (Hom.comp
    (Hom.comp k
      (Hom.comp (DayTensor.rightUnitor classicalBitModule)
        (DayTensor.rightUnitor
          (dayTensor classicalBitModule dayTensorUnit))))
    (Hom.comp
      (FragmentContext.moveArgumentIntoUnrestricted
        dayTensorUnit dayTensorUnit classicalBitModule)
      (DayTensor.map (Hom.id (dayTensor dayTensorUnit dayTensorUnit))
        bitClassicalize)))
    (Hom.comp
      (DayTensor.map (Hom.id (FragmentContext.combined [] []))
        (FragmentContext.closedPoint f))
      (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil)) =
  FragmentContext.closedPoint (Hom.comp k (Hom.comp bitClassicalize f)) := by
have hmove := FragmentContext.identity_body_unres_move_eq classicalBitModule
have hO :
  FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil =
  DayTensor.map FragmentContext.closedLeftUnitorInv
  FragmentContext.closedLeftUnitorInv := by
  rw [FragmentContext.combinedOSplit_nil]; rfl
have hfuse :
  Hom.comp bitClassicalize (FragmentContext.closedPoint f) =
  FragmentContext.closedPoint (Hom.comp bitClassicalize f) := by
  simp only [FragmentContext.closedPoint]
  exact Hom.comp_assoc bitClassicalize f
  FragmentContext.combinedClosedCollapse
have hmap :
  Hom.comp
    (DayTensor.map (Hom.id (dayTensor dayTensorUnit dayTensorUnit))
      bitClassicalize)
    (DayTensor.map (Hom.id (FragmentContext.combined [] []))
      (FragmentContext.closedPoint f)) =
  DayTensor.map (Hom.id (FragmentContext.combined [] []))
    (FragmentContext.closedPoint (Hom.comp bitClassicalize f)) := by
  rw [← hfuse]
  change Hom.comp

```

```

      (DayTensor.map (Hom.id (FragmentContext.combined [] [])) bitClassicalize)
      (DayTensor.map (Hom.id (FragmentContext.combined [] []))
        (FragmentContext.closedPoint f)) =
    DayTensor.map (Hom.id (FragmentContext.combined [] []))
      (Hom.comp bitClassicalize (FragmentContext.closedPoint f))
  simp only [Hom.id_comp] using
    (DayTensor.map_comp
      (Hom.id (FragmentContext.combined [] []))
      (Hom.id (FragmentContext.combined [] []))
      bitClassicalize (FragmentContext.closedPoint f)).symm
  have hcancel :
    Hom.comp
      (Hom.comp (DayTensor.leftUnitor classicalBitModule)
        (DayTensor.map (DayTensor.rightUnitor dayTensorUnit)
          (Hom.id classicalBitModule)))
      (Hom.comp
        (DayTensor.map (Hom.id (FragmentContext.combined [] []))
          (FragmentContext.closedPoint (Hom.comp bitClassicalize f)))
        (DayTensor.map FragmentContext.closedLeftUnitorInv
          FragmentContext.closedLeftUnitorInv)) =
    FragmentContext.closedPoint (Hom.comp bitClassicalize f) := by
  rw [FragmentContext.closedPoint]
  exact closed_identity_move_cancel (Hom.comp bitClassicalize f)
  refine Eq.trans (unres_post_regroup _ _ _ _ _) ?_
  rw [hmove, hmap, h0]
  refine Eq.trans (congrArg (Hom.comp k) hcancel) ?_
  simp only [FragmentContext.closedPoint]
  exact Hom.comp_assoc k (Hom.comp bitClassicalize f)
  FragmentContext.combinedClosedCollapse

```

### 5.3.538 Closed unrestricted $\beta$ for a body of the form $k \circ$ (projection of the classical bound variable)

**Statement.** Closed unrestricted  $\beta$  for a body of the form  $k \circ$  (projection of the classical bound variable). Taking  $k = \text{classicalBitInclusion}$  recovers the identity body; taking  $k = g \circ \text{classicalBitWeakening}$  gives a constant body.

**Proof.** The key step rewrites with the fact that composition for module morphisms is associative, the definition of the  $\varphi$ , the hypothesis that body equals an explicit expression in the composition, the right unitor, the classical bit superoperator module and the Day tensor product and the evaluation unrestricted bit of the abstract unrestricted for context interpretations.

#### Lean 4 source `QLambda/Linear/FragmentSubstBeta.lean`

```

theorem fragment_betaU_closed_post {N : Module}
  (k : Hom classicalBitModule N)
  (body : Hom
    (dayTensor (dayTensor classicalBitModule dayTensorUnit) dayTensorUnit) N)
  (f : Hom dayTensorUnit (fragmentModule .bit))
  (hbody :
    body =
      Hom.comp k
        (Hom.comp (DayTensor.rightUnitor classicalBitModule)
          (DayTensor.rightUnitor

```



```

      (dayTensor classicalBitModule dayTensorUnit)))) :
Hom.comp (FragmentContext.evalUnrestrictedBit N)
  (Hom.comp
    (DayTensor.map (FragmentContext.abstractUnrestricted body)
      (FragmentContext.closedPoint f))
    (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil)) =
  FragmentContext.closedPoint
    (Hom.comp k (Hom.comp bitClassicalize f)) := by
let ? : Hom (FragmentContext.combined [] [])
  (dayInternalHom classicalBitModule N) :=
  FragmentContext.abstractUnrestricted body
have hfactor :
  DayTensor.map ? (FragmentContext.closedPoint f) =
    Hom.comp (DayTensor.map ? (Hom.id (fragmentModule .bit)))
      (DayTensor.map (Hom.id (FragmentContext.combined [] []))
        (FragmentContext.closedPoint f)) := by
simpa only [Hom.comp_id, Hom.id_comp] using
  DayTensor.map_comp ? (Hom.id (FragmentContext.combined [] []))
    (Hom.id (fragmentModule .bit)) (FragmentContext.closedPoint f)
change Hom.comp (FragmentContext.evalUnrestrictedBit N)
  (Hom.comp (DayTensor.map ? (FragmentContext.closedPoint f))
    (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil)) =
  FragmentContext.closedPoint (Hom.comp k (Hom.comp bitClassicalize f))
rw [hfactor]
have hreassoc :
  Hom.comp (FragmentContext.evalUnrestrictedBit N)
    (Hom.comp
      (Hom.comp (DayTensor.map ? (Hom.id (fragmentModule .bit)))
        (DayTensor.map (Hom.id (FragmentContext.combined [] []))
          (FragmentContext.closedPoint f)))
      (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil)) =
  Hom.comp
    (Hom.comp (FragmentContext.evalUnrestrictedBit N)
      (DayTensor.map ? (Hom.id (fragmentModule .bit))))
    (Hom.comp
      (DayTensor.map (Hom.id (FragmentContext.combined [] []))
        (FragmentContext.closedPoint f))
      (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil)) := by
  rw [Hom.comp_assoc, Hom.comp_assoc, <- Hom.comp_assoc]
rw [hreassoc]
have hb :
  Hom.comp (FragmentContext.evalUnrestrictedBit N)
    (DayTensor.map ? (Hom.id (fragmentModule .bit))) =
  Hom.comp body
    (Hom.comp
      (FragmentContext.moveArgumentIntoUnrestricted
        dayTensorUnit dayTensorUnit classicalBitModule)
      (DayTensor.map (Hom.id (dayTensor dayTensorUnit dayTensorUnit))
        bitClassicalize)) := by
  dsimp only [?]
  exact FragmentContext.evalUnrestrictedBit_abstractUnrestricted body
rw [hb, hbody]
exact closed_unres_post_cancel k f

/-! ## Constant unrestricted bodies -/

```

### 5.3.539 Closed unrestricted $\beta$ for a constant body

**Statement.** Closed unrestricted  $\beta$  for a constant body: the argument is discarded through the classical-bit counit, leaving the body's point.

**Proof.** The key step rewrites with the hypothesis that body equals the combined point of the fragment context unrestricted bit empty list, show `AllNone ([] : List (Option Ty))` from `trivial, g`, the definition of the combined point, the fact that on  $\Gamma = [\text{bit}], \Delta = []$  the combined discard is the counit after the two unitors that strip the empty context slots and the closed unrestricted  $\beta$  for a body of the form  $k \circ (\text{projection of the classical bound variable})$ .

#### Lean 4 source `QLambda/Linear/FragmentSubstBeta.lean`

```
theorem fragment_betaU_const_closed {N : Module}
  (g : Hom dayTensorUnit N)
  (body : Hom
    (dayTensor (dayTensor classicalBitModule dayTensorUnit) dayTensorUnit) N)
  (f : Hom dayTensorUnit (fragmentModule .bit))
  (hbody :
    body =
      FragmentContext.combinedPoint fragment_ctxU_bit_nil
        (show AllNone ([] : List (Option Ty)) from trivial) g)
  (hf :
    Hom.comp classicalBitWeakening (Hom.comp bitClassicalize f) =
      Hom.id dayTensorUnit) :
Hom.comp (FragmentContext.evalUnrestrictedBit N)
  (Hom.comp
    (DayTensor.map (FragmentContext.abstractUnrestricted body)
      (FragmentContext.closedPoint f))
    (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil)) =
  FragmentContext.closedPoint g := by
have hpost :
  body =
    Hom.comp (Hom.comp g classicalBitWeakening)
      (Hom.comp (DayTensor.rightUnitor classicalBitModule)
        (DayTensor.rightUnitor
          (dayTensor classicalBitModule dayTensorUnit))) := by
rw [hbody, FragmentContext.combinedPoint, combinedAllDiscard_bit_nil]
exact Hom.comp_assoc g classicalBitWeakening
  (Hom.comp (DayTensor.rightUnitor classicalBitModule)
    (DayTensor.rightUnitor (dayTensor classicalBitModule dayTensorUnit)))
rw [fragment_betaU_closed_post (Hom.comp g classicalBitWeakening) body f
  hpost, <- Hom.comp_assoc, hf, Hom.comp_id]

/--! ## General substitution lemmas on `FragCert.denote` -/
```

### 5.3.540 Denotation of the fragment of the linear substitution of the closed term

**Statement. F4b (linear):** substituting a closed first-order value into a body whose denotation post-processes the bound variable by  $k$ .  $k = \text{id}$  is the identity body of `FragmentIdentityBeta`; every other  $k$  is a non-identity body.

**Proof.** The key step rewrites with the semantic substitution spine for linear application: denotation of linear application of `arg` expands as evaluation, the hypothesis that `FragCert.denote cX =`

`FragmentContext.closedPoint f`, the hypothesis that the denotation of the classical body equals an explicit expression in the composition, the left unitor, the fragment module and the functorial action and the closed linear  $\beta$  for a body of the form  $k \circ$  (projection of the bound variable).

#### Lean 4 source `QLambda/Linear/FragmentSubstBeta.lean`

```
theorem fragment_substLin_closed_denote {A B : Ty} {M X : Term}
  (hAd : Ty.Admissible A) (hFO : Ty.FirstOrder A)
  (hB : Ty.SemanticFragment B)
  (cBody : FragCert [] [some A] M B) (cX : FragCert [] [] X A)
  (k : Hom (fragmentModule A) (fragmentModule B))
  (f : Hom dayTensorUnit (fragmentModule A))
  (hbody :
    FragCert.denote cBody =
      Hom.comp k
        (Hom.comp (DayTensor.leftUnitor (fragmentModule A))
          (DayTensor.map (Hom.id dayTensorUnit)
            (DayTensor.rightUnitor (fragmentModule A))))))
  (harg : FragCert.denote cX = FragmentContext.closedPoint f) :
  FragCert.denote
    (.appL CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil hFO hB
      (.lamL CtxUAllBit.nil CtxLAllSomeFragment.nil hAd hFO hB cBody)
      cX) =
    FragmentContext.closedPoint (Hom.comp k f) := by
  rw [fragment_subst_lin_spine CtxUAllBit.nil CtxLAllSomeFragment.nil
    OSplit.nil hAd hFO hB CtxLAllSomeFragment.nil cBody cX, harg, hbody]
  exact fragment_betaL_closed_post hFO k _ f rfl
```

### 5.3.541 Denotation of the fragment of the unrestricted substitution of the closed term

**Statement. F4b (unrestricted):** substituting a closed bit value into a body whose denotation post-processes the classical bound variable by  $k$ .

**Proof.** The key step rewrites with the semantic substitution spine for unrestricted bit application, the hypothesis that `FragCert.denote cX = FragmentContext.closedPoint f`, the hypothesis that the denotation of the classical body equals an explicit expression in the composition, the right unitor, the classical bit superoperator module and the Day tensor product and the closed unrestricted  $\beta$  for a body of the form  $k \circ$  (projection of the classical bound variable).

#### Lean 4 source `QLambda/Linear/FragmentSubstBeta.lean`

```
theorem fragment_substUnres_closed_denote {B : Ty} {M X : Term}
  (hB : Ty.SemanticFragment B)
  (hArr : Ty.SemanticFragment (.arrow .unres .bit B))
  (cBody : FragCert [.bit] [] M B) (cX : FragCert [] [] X .bit)
  (k : Hom classicalBitModule (fragmentModule B))
  (f : Hom dayTensorUnit (fragmentModule .bit))
  (hbody :
    FragCert.denote cBody =
      Hom.comp k
        (Hom.comp (DayTensor.rightUnitor classicalBitModule)
          (DayTensor.rightUnitor
            (dayTensor classicalBitModule dayTensorUnit))))
  (harg : FragCert.denote cX = FragmentContext.closedPoint f) :
```

```

FragCert.denote
  (.appU CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil trivial hB
    (.lamU CtxUAllBit.nil CtxLAllSomeFragment.nil
      fragment_bit_admissible fragment_bit_duplicable trivial hArr
      cBody)
    cX) =
  FragmentContext.closedPoint
    (Hom.comp k (Hom.comp bitClassicalize f)) := by
rw [fragment_subst_unres_bit_spine CtxUAllBit.nil CtxLAllSomeFragment.nil
  OSplit.nil fragment_bit_admissible fragment_bit_duplicable trivial hArr hB
  CtxLAllSomeFragment.nil trivial cBody cX, harg, hbody]
exact fragment_betaU_closed_post k _ f rfl

```

### 5.3.542 Denotation of the fragment of the unrestricted substitution of the const

**Statement. F4b (constant body):** substituting a closed bit value into a body that does not mention the bound variable returns the body's point.

**Proof.** The key step rewrites with the semantic substitution spine for unrestricted bit application, the hypothesis that `FragCert.denote cX = FragmentContext.closedPoint f`, the hypothesis that the denotation of the classical body equals the combined point of the fragment context unrestricted bit empty list, show `AllNone ([] : List (Option Ty))` from `trivial, g` and the closed unrestricted  $\beta$  for a constant body.

#### Lean 4 source `QLambda/Linear/FragmentSubstBeta.lean`

```

theorem fragment_substUnres_const_denote {B : Ty} {M X : Term}
  (hB : Ty.SemanticFragment B)
  (hArr : Ty.SemanticFragment (.arrow .unres .bit B))
  (cBody : FragCert [.bit] [] M B) (cX : FragCert [] [] X .bit)
  (g : Hom dayTensorUnit (fragmentModule B))
  (f : Hom dayTensorUnit (fragmentModule .bit))
  (hbody :
    FragCert.denote cBody =
      FragmentContext.combinedPoint fragment_ctxU_bit_nil
        (show AllNone ([] : List (Option Ty)) from trivial) g)
  (harg : FragCert.denote cX = FragmentContext.closedPoint f)
  (hf :
    Hom.comp classicalBitWeakening (Hom.comp bitClassicalize f) =
      Hom.id dayTensorUnit) :
FragCert.denote
  (.appU CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil trivial hB
    (.lamU CtxUAllBit.nil CtxLAllSomeFragment.nil
      fragment_bit_admissible fragment_bit_duplicable trivial hArr
      cBody)
    cX) =
  FragmentContext.closedPoint g := by
rw [fragment_subst_unres_bit_spine CtxUAllBit.nil CtxLAllSomeFragment.nil
  OSplit.nil fragment_bit_admissible fragment_bit_duplicable trivial hArr hB
  CtxLAllSomeFragment.nil trivial cBody cX, harg, hbody]
exact fragment_betaU_const_closed g _ f rfl hf

/ -! ## Certificates for constant unrestricted combinators -/

```

### 5.3.543 Constant bit body bit literal of $c$ under an unrestricted bit binder

**Definition.** Constant bit body `bitLit c` under an unrestricted bit binder.

**Construction.** Defined to be `.bitLit fragment_ctxU_bit_nil CtxLAllSomeFragment.nil c trivial`.

**Lean 4 source** `QLambda/Linear/FragmentSubstBeta.lean`

```
noncomputable def fragCert_bitLit_ctxU_bit (c : Bool) :
  FragCert [.bit] [] (.bitLit c) .bit :=
  .bitLit fragment_ctxU_bit_nil CtxLAllSomeFragment.nil c trivial
```

### 5.3.544 Definition of the fragment certificate of the unrestricted lambda abstraction of the const of the bit

**Definition.** Closed constant combinator  $\lambda!x. \text{bitLit } c$ .

**Construction.** Defined by an explicit formula built from the empty list, the fragment bit admissibility, the fragment bit duplicability and the bit.

**Lean 4 source** `QLambda/Linear/FragmentSubstBeta.lean`

```
noncomputable def fragCert_lamU_const_bit (c : Bool) :
  FragCert [] [] (.lam .unres .bit (.bitLit c))
    (.arrow .unres .bit .bit) :=
  .lamU CtxUAllBit.nil CtxLAllSomeFragment.nil fragment_bit_admissible
    fragment_bit_duplicable trivial
    (.arrowUnresBit Ty.SemanticFragment.bit) (fragCert_bitLit_ctxU_bit c)
```

### 5.3.545 Definition of the fragment certificate of the unrestricted application of the const of the bit

**Definition.** Closed  $\beta$ -redex app  $(\lambda!x. \text{bitLit } c) (\text{bitLit } b)$ .

**Construction.** Defined by an explicit formula built from the empty list, the bit, the fragment certificate lambda unrestricted const bit and the closed term bit lit certificate.

**Lean 4 source** `QLambda/Linear/FragmentSubstBeta.lean`

```
noncomputable def fragCert_appU_const_bit (c b : Bool) :
  FragCert [] []
    (.app (.lam .unres .bit (.bitLit c)) (.bitLit b)) .bit :=
  .appU CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil trivial
    Ty.SemanticFragment.bit (fragCert_lamU_const_bit c)
    (FragCert.closed_bitLit_cert b)
```

### 5.3.546 Constant unit body under an unrestricted bit binder

**Definition.** Constant unit body under an unrestricted bit binder.

**Construction.** Defined to be the unit of the fragment context unrestricted bit empty list, the empty list, trivial.

**Lean 4 source** `QLambda/Linear/FragmentSubstBeta.lean`

```

noncomputable def fragCert_unit_ctxU_bit :
  FragCert [.bit] [] .unit .unit :=
  .unit fragment_ctxU_bit_nil CtxLAllSomeFragment.nil trivial

```

### 5.3.547 Definition of the fragment certificate of the unrestricted lambda abstraction of the const of the unit

**Definition.** Closed constant combinator  $\lambda!x. \text{unit}$ .

**Construction.** Defined by an explicit formula built from the empty list, the fragment bit admissibility, the fragment bit duplicability and the unit.

**Lean 4 source** [QLambda/Linear/FragmentSubstBeta.lean](#)

```

noncomputable def fragCert_lamU_const_unit :
  FragCert [] [] (.lam .unres .bit .unit) (.arrow .unres .bit .unit) :=
  .lamU CtxUAllBit.nil CtxLAllSomeFragment.nil fragment_bit_admissible
  fragment_bit_duplicable trivial
  (.arrowUnresBit Ty.SemanticFragment.unit) fragCert_unit_ctxU_bit

```

### 5.3.548 Definition of the fragment certificate of the unrestricted application of the const of the unit

**Definition.** Closed  $\beta$ -redex app  $(\lambda!x. \text{unit}) (\text{bitLit } b)$ .

**Construction.** Defined by an explicit formula built from the empty list, the unit, the fragment certificate lambda unrestricted const unit and the closed term bit lit certificate.

**Lean 4 source** [QLambda/Linear/FragmentSubstBeta.lean](#)

```

noncomputable def fragCert_appU_const_unit (b : Bool) :
  FragCert [] [] (.app (.lam .unres .bit .unit) (.bitLit b)) .unit :=
  .appU CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil trivial
  Ty.SemanticFragment.unit fragCert_lamU_const_unit
  (FragCert.closed_bitLit_cert b)

```

### 5.3.549 Denotation of the fragment certificate of the bit literal of the unrestricted context of the bit

**Statement.** For a bit  $c$ : the denotation of the fragment certificate bit lit context unrestricted bit of  $c$  equals the combined point of the fragment context unrestricted bit empty list, show  $\text{AllNone } ([] : \text{List } (\text{Option } \text{Ty}))$  from trivial, the bit lit morphism of  $c$ .

**Proof.** By definition. Unfolding the denotation turns the left-hand side, the denotation of the fragment certificate bit lit context unrestricted bit of  $c$ , into the right-hand side, the combined point of the fragment context unrestricted bit empty list, show  $\text{AllNone } ([] : \text{List } (\text{Option } \text{Ty}))$  from trivial, the bit lit morphism of  $c$ ; the two sides are the same term.

**Lean 4 source** [QLambda/Linear/FragmentSubstBeta.lean](#)

```

theorem fragCert_bitLit_ctxU_bit_denote (c : Bool) :
  FragCert.denote (fragCert_bitLit_ctxU_bit c) =
  FragmentContext.combinedPoint fragment_ctxU_bit_nil
  (show AllNone ([] : List (Option Ty)) from trivial) (bitLitHom c) :=
  rfl

```

### 5.3.550 Denotation of the fragment certificate of the unit of the unrestricted context of the bit

**Statement.** The denotation of the fragment certificate unit context unrestricted bit equals the combined point of the fragment context unrestricted bit empty list, show `AllNone ([] : List (Option Ty))` from `trivial`, the unit introduction.

**Proof.** By definition. Unfolding the denotation turns the left-hand side, the denotation of the fragment certificate unit context unrestricted bit, into the right-hand side, the combined point of the fragment context unrestricted bit empty list, show `AllNone ([] : List (Option Ty))` from `trivial`, the unit introduction; the two sides are the same term.

#### Lean 4 source `QLambda/Linear/FragmentSubstBeta.lean`

```
theorem fragCert_unit_ctxU_bit_denote :
  FragCert.denote fragCert_unit_ctxU_bit =
    FragmentContext.combinedPoint fragment_ctxU_bit_nil
      (show AllNone ([] : List (Option Ty)) from trivial)
    routeAFragmentModel.unitIntro :=
  rfl

/-! ## F4b substitution equations with a non-identity body -/
```

### 5.3.551 Term-level substitution into a constant body

**Statement.** Term-level substitution into a constant body. Formally: `Term.substUnres 0 V (.bit Lit c) = .bitLit c`.

**Proof.** The goal is simplified using the definition of the unrestricted substitution.

#### Lean 4 source `QLambda/Linear/FragmentSubstBeta.lean`

```
theorem substUnres_const_bitLit (c : Bool) (V : Term) :
  Term.substUnres 0 V (.bitLit c) = .bitLit c := by
  simp [Term.substUnres]
```

### 5.3.552 Term-level substitution into the constant unit body

**Statement.** Term-level substitution into the constant unit body. Formally: `Term.substUnres 0 V .unit = .unit`.

**Proof.** The goal is simplified using the definition of the unrestricted substitution.

#### Lean 4 source `QLambda/Linear/FragmentSubstBeta.lean`

```
theorem substUnres_const_unit (V : Term) :
  Term.substUnres 0 V .unit = .unit := by
  simp [Term.substUnres]
```

### 5.3.553 Fragment of the unrestricted substitution of the const of the denotation of the bit

**Statement.** **F4b (bit):** substituting the closed value `bitLit b` into the non-identity constant body `bit Lit c` agrees with the contractum on `FragCert.denote`. Formally: `FragCert.denote (frag`

`Cert_appU_const_bit c b) = FragCert.denote (FragCert.closed_bitLit_cert c).`

**Proof.** The key step rewrites with the closed bit-literal certificates denote as closed term point and the denotation of the fragment of the unrestricted substitution of the const.

#### Lean 4 source `QLambda/Linear/FragmentSubstBeta.lean`

```
theorem fragment_substUnres_const_denote_bit (c b : Bool) :
  FragCert.denote (fragCert_appU_const_bit c b) =
    FragCert.denote (FragCert.closed_bitLit_cert c) := by
  rw [FragCert.closed_bitLit_denote_eq c]
  exact fragment_substUnres_const_denote Ty.SemanticFragment.bit
    (.arrowUnresBit Ty.SemanticFragment.bit) (fragCert_bitLit_ctxU_bit c)
    (FragCert.closed_bitLit_cert b) (bitLitHom c) (bitLitHom b)
    (fragCert_bitLit_ctxU_bit_denote c)
    (FragCert.closed_bitLit_denote_eq b)
    (classicalBitWeakening_comp_bitClassicalize_bitLit b)
```

### 5.3.554 Denotation of the fragment of the unrestricted substitution of the const, at the unit

**Statement. F4b (unit):** substituting the closed value `bitLit b` into the non-identity constant body `unit` agrees with the contractum. Formally: `FragCert.denote (fragCert_appU_const_unit b) = FragCert.denote FragCert.closed_unit_cert.`

**Proof.** The key step rewrites with the denotational soundness for closed unit and the denotation of the fragment of the unrestricted substitution of the const.

#### Lean 4 source `QLambda/Linear/FragmentSubstBeta.lean`

```
theorem fragment_substUnres_const_denote_unit (b : Bool) :
  FragCert.denote (fragCert_appU_const_unit b) =
    FragCert.denote FragCert.closed_unit_cert := by
  rw [fragment_step_denote_sound_unit FragCert.closed_unit_cert]
  exact fragment_substUnres_const_denote Ty.SemanticFragment.unit
    (.arrowUnresBit Ty.SemanticFragment.unit) fragCert_unit_ctxU_bit
    (FragCert.closed_bitLit_cert b) routeAFragmentModel.unitIntro
    (bitLitHom b) fragCert_unit_ctxU_bit_denote
    (FragCert.closed_bitLit_denote_eq b)
    (classicalBitWeakening_comp_bitClassicalize_bitLit b)
```

### 5.3.555 The Day braiding on $1 \otimes 1$ is the identity

**Statement.** The Day braiding on  $1 \otimes 1$  is the identity. Formally: `DayTensor.braiding day TensorUnit dayTensorUnit = Hom.id (dayTensor dayTensorUnit dayTensor Unit).`

**Proof.** The claim follows from a chain of equalities (or inequalities). The key step rewrites with the fact that left and right unitors agree after braiding the unit past A, the fact that the left unitor of the unit equals the right unitor of the unit, the fact that composition for module morphisms is associative and the fact that the identity is a left unit for composition for module morphisms.

#### Lean 4 source `QLambda/Linear/FragmentUnpairBeta.lean`



```

theorem dayBraiding_unit_unit :
  DayTensor.braiding dayTensorUnit dayTensorUnit =
    Hom.id (dayTensor dayTensorUnit dayTensorUnit) := by
have h?sigma :
  Hom.comp (DayTensor.rightUnitor dayTensorUnit)
    (DayTensor.braiding dayTensorUnit dayTensorUnit) =
    DayTensor.rightUnitor dayTensorUnit := by
rw [FragmentContext.rightUnitor_comp_braiding,
  leftUnitor_unit_eq_rightUnitor_unit]
have hinv :
  Hom.comp (DayTensor.rightUnitorInv dayTensorUnit)
    (DayTensor.rightUnitor dayTensorUnit) =
    Hom.id (dayTensor dayTensorUnit dayTensorUnit) :=
  (DayTensor.rightUnitorIso dayTensorUnit).inv_hom
calc DayTensor.braiding dayTensorUnit dayTensorUnit
  = Hom.comp (DayTensor.rightUnitorInv dayTensorUnit)
    (Hom.comp (DayTensor.rightUnitor dayTensorUnit)
      (DayTensor.braiding dayTensorUnit dayTensorUnit)) := by
  rw [Hom.comp_assoc, hinv, Hom.id_comp]
_ = Hom.comp (DayTensor.rightUnitorInv dayTensorUnit)
  (DayTensor.rightUnitor dayTensorUnit) := by rw [h?sigma]
_ = Hom.id (dayTensor dayTensorUnit dayTensorUnit) := hinv

```

### 5.3.556 Inverse associator naturality (dual of associator naturality)

**Statement.** Inverse associator naturality (dual of `DayTensor.associator_naturality`).

**Proof.** The key step rewrites with the naturality of the associator, the fact that composition for module morphisms is associative, the fact that the associator and its inverse compose to the identity and the fact that the identity is a left unit for composition for module morphisms.

#### Lean 4 source `QLambda/Linear/FragmentUnpairBeta.lean`

```

theorem dayAssociatorInv_naturality {M M' N N' P P' : Module}
  (f : Hom M M') (g : Hom N N') (h : Hom P P') :
  Hom.comp (DayTensor.associatorInv M' N' P')
    (DayTensor.map f (DayTensor.map g h)) =
  Hom.comp (DayTensor.map f (DayTensor.map g h))
    (DayTensor.associatorInv M N P) := by
have hkey :
  Hom.comp (DayTensor.associatorInv M' N' P')
    (Hom.comp (DayTensor.map f (DayTensor.map g h))
      (DayTensor.associator M N P)) =
  DayTensor.map (DayTensor.map f g) h := by
rw [ <- DayTensor.associator_naturality, Hom.comp_assoc,
  DayTensor.associator_inv_hom, Hom.id_comp]
rw [ <- hkey]
show Hom.comp (DayTensor.associatorInv M' N' P')
  (DayTensor.map f (DayTensor.map g h)) =
  Hom.comp (DayTensor.associatorInv M' N' P')
    (Hom.comp (DayTensor.map f (DayTensor.map g h))
      (Hom.comp (DayTensor.associator M N P)
        (DayTensor.associatorInv M N P)))
rw [DayTensor.associator_hom_inv, Hom.comp_id]

```

### 5.3.557 Unit triangle in inverse form: $\alpha^{-1} \circ (\text{id} \otimes \lambda^{-1}) = \lambda^{-1} \otimes \text{id}$

**Statement.** Unit triangle in inverse form:  $\alpha^{-1} \circ (\text{id} \otimes \lambda^{-1}) = \lambda^{-1} \otimes \text{id}$ .

**Proof.** The claim follows from a chain of equalities (or inequalities). The key step rewrites with the triangle for Day tensor products, the fact that the left unitor of the unit equals the right unitor of the unit, the fact that the associator and its inverse compose to the identity and the fact that the identity is a left unit for composition for module morphisms.

#### Lean 4 source `QLambda/Linear/FragmentUnpairBeta.lean`

```
theorem dayAssociatorInv_leftUnitorInv (N : Module) :
  Hom.comp (DayTensor.associatorInv dayTensorUnit dayTensorUnit N)
    (DayTensor.map (Hom.id dayTensorUnit) (DayTensor.leftUnitorInv N)) =
    DayTensor.map (DayTensor.leftUnitorInv dayTensorUnit) (Hom.id N) := by
  have htri :
    Hom.comp
      (DayTensor.map (Hom.id dayTensorUnit) (DayTensor.leftUnitor N))
      (DayTensor.associator dayTensorUnit dayTensorUnit N) =
      DayTensor.map (DayTensor.leftUnitor dayTensorUnit) (Hom.id N) := by
    rw [DayTensor.triangle, leftUnitor_unit_eq_rightUnitor_unit]
  have hcancel :
    Hom.comp (DayTensor.map (DayTensor.leftUnitor dayTensorUnit) (Hom.id N))
      (Hom.comp (DayTensor.associatorInv dayTensorUnit dayTensorUnit N)
        (DayTensor.map (Hom.id dayTensorUnit)
          (DayTensor.leftUnitorInv N))) =
    Hom.id (dayTensor dayTensorUnit N) := by
    rw [← htri]
  show Hom.comp
    (DayTensor.map (Hom.id dayTensorUnit) (DayTensor.leftUnitor N))
    (Hom.comp
      (Hom.comp (DayTensor.associator dayTensorUnit dayTensorUnit N)
        (DayTensor.associatorInv dayTensorUnit dayTensorUnit N))
      (DayTensor.map (Hom.id dayTensorUnit)
        (DayTensor.leftUnitorInv N))) =
    Hom.id (dayTensor dayTensorUnit N)
    rw [DayTensor.associator_hom_inv, Hom.id_comp, ← DayTensor.map_comp,
      DayTensor.leftUnitor_hom_inv, Hom.id_comp, DayTensor.map_id]
  have hmapinv :
    Hom.comp
      (DayTensor.map (DayTensor.leftUnitorInv dayTensorUnit) (Hom.id N))
      (DayTensor.map (DayTensor.leftUnitor dayTensorUnit) (Hom.id N)) =
    Hom.id (dayTensor (dayTensor dayTensorUnit dayTensorUnit) N) := by
  have hlu :
    Hom.comp (DayTensor.leftUnitorInv dayTensorUnit)
      (DayTensor.leftUnitor dayTensorUnit) =
    Hom.id (dayTensor dayTensorUnit dayTensorUnit) :=
    (DayTensor.leftUnitorIso dayTensorUnit).inv_hom
    rw [← DayTensor.map_comp, hlu, Hom.id_comp, DayTensor.map_id]
  calc Hom.comp (DayTensor.associatorInv dayTensorUnit dayTensorUnit N)
    (DayTensor.map (Hom.id dayTensorUnit) (DayTensor.leftUnitorInv N))
    = Hom.comp
      (DayTensor.map (DayTensor.leftUnitorInv dayTensorUnit) (Hom.id N))
      (Hom.comp
        (DayTensor.map (DayTensor.leftUnitor dayTensorUnit) (Hom.id N))
        (Hom.comp (DayTensor.associatorInv dayTensorUnit dayTensorUnit N)
          (DayTensor.map (Hom.id dayTensorUnit)
            (DayTensor.leftUnitorInv N))))
```

```

      (DayTensor.leftUnitorInv N))) := by
    rw [Hom.comp_assoc, hmapinv, Hom.id_comp]
  _ = Hom.comp
    (DayTensor.map (DayTensor.leftUnitorInv dayTensorUnit) (Hom.id N))
    (Hom.id (dayTensor dayTensorUnit N)) := by rw [hcancel]
  _ = DayTensor.map (DayTensor.leftUnitorInv dayTensorUnit) (Hom.id N) :=
    Hom.comp_id _

```

### 5.3.558 Coassociativity of a unit-generated diagonal on $1 \otimes 1$

**Statement.** Coassociativity of a unit-generated diagonal on  $1 \otimes 1$ .

**Proof.** The claim follows from a chain of equalities (or inequalities). The key step rewrites with the fact that the functorial action for Day tensor products preserves composition, the fact that the identity is a left unit for composition for module morphisms, the fact that the identity is a right unit for composition for module morphisms and the fact that composition for module morphisms is associative.

**Lean 4 source** [QLambda/Linear/FragmentUnpairBeta.lean](#)

```

private theorem closedSplit_coassoc_aux
  (u : Hom dayTensorUnit (dayTensor dayTensorUnit dayTensorUnit))
  (htri :
    Hom.comp
      (DayTensor.associatorInv dayTensorUnit dayTensorUnit dayTensorUnit)
      (DayTensor.map (Hom.id dayTensorUnit) u) =
      DayTensor.map u (Hom.id dayTensorUnit)) :
  Hom.comp
    (DayTensor.associatorInv (dayTensor dayTensorUnit dayTensorUnit)
      (dayTensor dayTensorUnit dayTensorUnit)
      (dayTensor dayTensorUnit dayTensorUnit))
    (Hom.comp
      (DayTensor.map (Hom.id (dayTensor dayTensorUnit dayTensorUnit))
        (DayTensor.map u u))
      (DayTensor.map u u)) =
  Hom.comp
    (DayTensor.map (DayTensor.map u u)
      (Hom.id (dayTensor dayTensorUnit dayTensorUnit)))
    (DayTensor.map u u) := by
  have hL :
    Hom.comp
      (DayTensor.map (Hom.id (dayTensor dayTensorUnit dayTensorUnit))
        (DayTensor.map u u))
      (DayTensor.map u u) =
    Hom.comp (DayTensor.map u (DayTensor.map u u))
      (DayTensor.map (Hom.id dayTensorUnit) u) := by
    simp only [ <- DayTensor.map_comp, Hom.id_comp, Hom.comp_id]
  rw [hL]
  calc Hom.comp
    (DayTensor.associatorInv (dayTensor dayTensorUnit dayTensorUnit)
      (dayTensor dayTensorUnit dayTensorUnit)
      (dayTensor dayTensorUnit dayTensorUnit))
    (Hom.comp (DayTensor.map u (DayTensor.map u u))
      (DayTensor.map (Hom.id dayTensorUnit) u))
  = Hom.comp
    (Hom.comp

```

```

      (DayTensor.associatorInv (dayTensor dayTensorUnit dayTensorUnit)
        (dayTensor dayTensorUnit dayTensorUnit)
        (dayTensor dayTensorUnit dayTensorUnit))
      (DayTensor.map u (DayTensor.map u u)))
    (DayTensor.map (Hom.id dayTensorUnit) u) := by
    simp only [Hom.comp_assoc]
  _ = Hom.comp
    (Hom.comp (DayTensor.map (DayTensor.map u u) u)
      (DayTensor.associatorInv dayTensorUnit dayTensorUnit
        dayTensorUnit))
    (DayTensor.map (Hom.id dayTensorUnit) u) := by
    rw [dayAssociatorInv_naturality]
  _ = Hom.comp (DayTensor.map (DayTensor.map u u) u)
    (Hom.comp
      (DayTensor.associatorInv dayTensorUnit dayTensorUnit dayTensorUnit)
      (DayTensor.map (Hom.id dayTensorUnit) u)) := by
    simp only [Hom.comp_assoc]
  _ = Hom.comp (DayTensor.map (DayTensor.map u u) u)
    (DayTensor.map u (Hom.id dayTensorUnit)) := by rw [htri]
  _ = Hom.comp
    (DayTensor.map (DayTensor.map u u)
      (Hom.id (dayTensor dayTensorUnit dayTensorUnit)))
    (DayTensor.map u u) := by
    simp only [ <- DayTensor.map_comp, Hom.id_comp, Hom.comp_id]

```

### 5.3.559 The closed context split is cocommutative

**Statement.** The closed context split is cocommutative.

**Proof.** The key step rewrites with the naturality of the braiding, the fact that the Day braiding on  $1 \otimes 1$  is the identity and the fact that the identity is a right unit for composition for module morphisms.

#### Lean 4 source `QLambda/Linear/FragmentUnpairBeta.lean`

```

theorem combinedOSplit_nil_braiding :
  Hom.comp
    (DayTensor.braiding (FragmentContext.combined [] []))
    (FragmentContext.combined [] []))
    (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil) =
  FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil := by
have h :
  Hom.comp
    (DayTensor.braiding (dayTensor dayTensorUnit dayTensorUnit)
      (dayTensor dayTensorUnit dayTensorUnit))
    (DayTensor.map (DayTensor.leftUnitorInv dayTensorUnit)
      (DayTensor.leftUnitorInv dayTensorUnit)) =
  DayTensor.map (DayTensor.leftUnitorInv dayTensorUnit)
    (DayTensor.leftUnitorInv dayTensorUnit) := by
    rw [DayTensor.braiding_naturality, dayBraiding_unit_unit, Hom.comp_id]
exact h

```

### 5.3.560 The closed context split is coassociative

**Statement.** The closed context split is coassociative.

**Proof.** This is an instance of the coassociativity of a unit-generated diagonal on  $1 \otimes 1$ , applied to the definition of the inverse left unitor.

#### Lean 4 source `QLambda/Linear/FragmentUnpairBeta.lean`

```
theorem combinedOSplit_nil_coassoc :
  Hom.comp
    (DayTensor.associatorInv (FragmentContext.combined [] []))
    (FragmentContext.combined [] []) (FragmentContext.combined [] []))
  (Hom.comp
    (DayTensor.map (Hom.id (FragmentContext.combined [] []))
      (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil))
    (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil)) =
  Hom.comp
    (DayTensor.map
      (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil)
      (Hom.id (FragmentContext.combined [] [])))
    (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil) :=
  closedSplit_coassoc_aux (DayTensor.leftUnitorInv dayTensorUnit)
    (dayAssociatorInv_leftUnitorInv dayTensorUnit)
```

### 5.3.561 First-order pair elimination inverts pair introduction

**Statement.** First-order pair elimination inverts pair introduction.

**Proof.** The key step rewrites with the fact that the functorial action for Day tensor products preserves composition, the first order from representable of a composite of the passage to representable for context interpretations, the fact that the functorial action for Day tensor products preserves identities and the fact that observational equality is transitive.

#### Lean 4 source `QLambda/Linear/FragmentUnpairBeta.lean`

```
theorem tensorElim_comp_tensorIntro {A B : Ty}
  (hA : Ty.FirstOrder A) (hB : Ty.FirstOrder B) :
  Hom.comp (FragmentContext.tensorElim hA hB)
    (FragmentContext.tensorIntro hA hB) =
  Hom.id (dayTensor (fragmentModule A) (fragmentModule B)) := by
  have hstep1 :
    Hom.comp (FragmentContext.tensorElim hA hB)
      (FragmentContext.tensorIntro hA hB) =
    Hom.comp
      (DayTensor.map (FragmentContext.firstOrderFromRep hA)
        (FragmentContext.firstOrderFromRep hB))
      (Hom.comp
        (Hom.comp (dayTensorRepresentableIso A.hilbertDim B.hilbertDim).inv
          (dayTensorRepresentableIso A.hilbertDim B.hilbertDim).hom)
        (DayTensor.map (FragmentContext.firstOrderToRep hA)
          (FragmentContext.firstOrderToRep hB))) :=
  congrArg
    (fun g =>
      Hom.comp
        (DayTensor.map (FragmentContext.firstOrderFromRep hA)
          (FragmentContext.firstOrderFromRep hB))
        (Hom.comp
          (Hom.comp
```

```

      (dayTensorRepresentableIso A.hilbertDim B.hilbertDim).inv
      (Hom.comp g
        (dayTensorRepresentableIso A.hilbertDim B.hilbertDim).hom))
      (DayTensor.map (FragmentContext.firstOrderToRep hA)
        (FragmentContext.firstOrderToRep hB)))
    (FragmentContext.firstOrderToRep_comp_fromRep
      (Ty.FirstOrder.tensor hA hB))
have hstep2 :
  Hom.comp
    (DayTensor.map (FragmentContext.firstOrderFromRep hA)
      (FragmentContext.firstOrderFromRep hB))
    (Hom.comp
      (Hom.comp (dayTensorRepresentableIso A.hilbertDim B.hilbertDim).inv
        (dayTensorRepresentableIso A.hilbertDim B.hilbertDim).hom)
      (DayTensor.map (FragmentContext.firstOrderToRep hA)
        (FragmentContext.firstOrderToRep hB))) =
    Hom.comp
      (DayTensor.map (FragmentContext.firstOrderFromRep hA)
        (FragmentContext.firstOrderFromRep hB))
      (DayTensor.map (FragmentContext.firstOrderToRep hA)
        (FragmentContext.firstOrderToRep hB)) :=
congrArg
  (fun g =>
    Hom.comp
      (DayTensor.map (FragmentContext.firstOrderFromRep hA)
        (FragmentContext.firstOrderFromRep hB))
      (Hom.comp g
        (DayTensor.map (FragmentContext.firstOrderToRep hA)
          (FragmentContext.firstOrderToRep hB))))
    (dayTensorRepresentableIso A.hilbertDim B.hilbertDim).inv_hom
have hstep3 :
  Hom.comp
    (DayTensor.map (FragmentContext.firstOrderFromRep hA)
      (FragmentContext.firstOrderFromRep hB))
    (DayTensor.map (FragmentContext.firstOrderToRep hA)
      (FragmentContext.firstOrderToRep hB)) =
    Hom.id (dayTensor (fragmentModule A) (fragmentModule B)) := by
  rw [ <- DayTensor.map_comp, FragmentContext.firstOrderFromRep_comp_toRep,
    FragmentContext.firstOrderFromRep_comp_toRep, DayTensor.map_id]
  exact hstep1.trans (hstep2.trans hstep3)

/-! ## F4a: closed first-order `unpair` b on `FragCert.denote` -/

```

### 5.3.562 Symmetric-monoidal core of closed pair elimination $\beta$

**Statement.** Symmetric-monoidal core of closed `unpair`  $\beta$ : unpacking a first-order pair and feeding it to a curried continuation agrees with two applications.

**Proof.** The claim follows from a chain of equalities (or inequalities). The key step rewrites with the fact that composition for module morphisms is associative, the naturality of the braiding, the hypothesis that  $\text{Hom.comp (DayTensor.braiding U U) } S = S$  and the fact that the functorial action for Day tensor products preserves composition.

Lean 4 source [QLambda/Linear/FragmentUnpairBeta.lean](#)

```

private theorem unpair_beta_aux
  {U FA FB FAB H HB FC : Module}
  (S : Hom U (dayTensor U U))
  (hSym : Hom.comp (DayTensor.braiding U U) S = S)
  (hAssoc :
    Hom.comp (DayTensor.associatorInv U U U)
      (Hom.comp (DayTensor.map (Hom.id U) S) S) =
      Hom.comp (DayTensor.map S (Hom.id U)) S)
  (TI : Hom (dayTensor FA FB) FAB) (TE : Hom FAB (dayTensor FA FB))
  (hTE : Hom.comp TE TI = Hom.id (dayTensor FA FB))
  (evA : Hom (dayTensor H FA) HB) (evB : Hom (dayTensor HB FB) FC)
  (dM : Hom U FA) (dN : Hom U FB) (dK : Hom U H) :
  Hom.comp
    (Hom.comp evB
      (Hom.comp (DayTensor.map evA (Hom.id FB))
        (Hom.comp (DayTensor.associatorInv H FA FB)
          (Hom.comp (DayTensor.map (Hom.id H) TE)
            (DayTensor.braiding FAB H))))))
    (Hom.comp
      (DayTensor.map
        (Hom.comp TI (Hom.comp (DayTensor.map dM dN) S)) dK)
      S) =
  Hom.comp evB
    (Hom.comp
      (DayTensor.map (Hom.comp evA (Hom.comp (DayTensor.map dK dM) S))
        dN)
      S) := by
have step1 :
  Hom.comp (DayTensor.braiding FAB H)
    (Hom.comp
      (DayTensor.map
        (Hom.comp TI (Hom.comp (DayTensor.map dM dN) S)) dK)
      S) =
  Hom.comp
    (DayTensor.map dK
      (Hom.comp TI (Hom.comp (DayTensor.map dM dN) S)))
    S := by
  rw [Hom.comp_assoc, DayTensor.braiding_naturality, <- Hom.comp_assoc, hSym]
have step2 :
  Hom.comp (DayTensor.map (Hom.id H) TE)
    (Hom.comp
      (DayTensor.map dK
        (Hom.comp TI (Hom.comp (DayTensor.map dM dN) S)))
      S) =
  Hom.comp (DayTensor.map dK (Hom.comp (DayTensor.map dM dN) S)) S := by
  rw [Hom.comp_assoc, <- DayTensor.map_comp, Hom.id_comp,
    Hom.comp_assoc TE TI (Hom.comp (DayTensor.map dM dN) S), hTE,
    Hom.id_comp]
have step3 :
  Hom.comp (DayTensor.associatorInv H FA FB)
    (Hom.comp (DayTensor.map dK (Hom.comp (DayTensor.map dM dN) S)) S) =
  Hom.comp (DayTensor.map (DayTensor.map dK dM) dN)
    (Hom.comp (DayTensor.map S (Hom.id U)) S) := by
have hfac :
  DayTensor.map dK (Hom.comp (DayTensor.map dM dN) S) =
  Hom.comp (DayTensor.map dK (DayTensor.map dM dN))

```

```

      (DayTensor.map (Hom.id U) S) := by
    simp only [ <- DayTensor.map_comp, Hom.comp_id]
  rw [hfacs]
  calc Hom.comp (DayTensor.associatorInv H FA FB)
    (Hom.comp
      (Hom.comp (DayTensor.map dK (DayTensor.map dM dN))
        (DayTensor.map (Hom.id U) S))
      S)
    = Hom.comp
      (Hom.comp (DayTensor.associatorInv H FA FB)
        (DayTensor.map dK (DayTensor.map dM dN)))
      (Hom.comp (DayTensor.map (Hom.id U) S) S) := by
    simp only [Hom.comp_assoc]
  _ = Hom.comp
    (Hom.comp (DayTensor.map (DayTensor.map dK dM) dN)
      (DayTensor.associatorInv U U U))
    (Hom.comp (DayTensor.map (Hom.id U) S) S) := by
    rw [dayAssociatorInv_naturality]
  _ = Hom.comp (DayTensor.map (DayTensor.map dK dM) dN)
    (Hom.comp (DayTensor.associatorInv U U U)
      (Hom.comp (DayTensor.map (Hom.id U) S) S)) := by
    simp only [Hom.comp_assoc]
  _ = Hom.comp (DayTensor.map (DayTensor.map dK dM) dN)
    (Hom.comp (DayTensor.map S (Hom.id U)) S) := by rw [hAssoc]
have step4 :
  Hom.comp (DayTensor.map evA (Hom.id FB))
    (Hom.comp (DayTensor.map (DayTensor.map dK dM) dN)
      (Hom.comp (DayTensor.map S (Hom.id U)) S)) =
  Hom.comp
    (DayTensor.map (Hom.comp evA (Hom.comp (DayTensor.map dK dM) S))
      dN)
    S := by
  calc Hom.comp (DayTensor.map evA (Hom.id FB))
    (Hom.comp (DayTensor.map (DayTensor.map dK dM) dN)
      (Hom.comp (DayTensor.map S (Hom.id U)) S))
    = Hom.comp
      (Hom.comp
        (Hom.comp (DayTensor.map evA (Hom.id FB))
          (DayTensor.map (DayTensor.map dK dM) dN))
        (DayTensor.map S (Hom.id U)))
      S := by
    simp only [Hom.comp_assoc]
  _ = Hom.comp
    (DayTensor.map
      (Hom.comp (Hom.comp evA (DayTensor.map dK dM)) S)
      (Hom.comp (Hom.comp (Hom.id FB) dN) (Hom.id U))) S := by
    simp only [ <- DayTensor.map_comp]
  _ = Hom.comp
    (DayTensor.map (Hom.comp evA (Hom.comp (DayTensor.map dK dM) S))
      dN)
    S := by
    simp only [Hom.comp_assoc, Hom.comp_id, Hom.id_comp]
have hgroup :
  Hom.comp
    (Hom.comp evB
      (Hom.comp (DayTensor.map evA (Hom.id FB))

```



```

      (Hom.comp (DayTensor.associatorInv H FA FB)
        (Hom.comp (DayTensor.map (Hom.id H) TE)
          (DayTensor.braiding FAB H))))))
    (Hom.comp
      (DayTensor.map
        (Hom.comp TI (Hom.comp (DayTensor.map dM dN) S)) dK)
      S) =
    Hom.comp evB
      (Hom.comp (DayTensor.map evA (Hom.id FB))
        (Hom.comp (DayTensor.associatorInv H FA FB)
          (Hom.comp (DayTensor.map (Hom.id H) TE)
            (Hom.comp (DayTensor.braiding FAB H)
              (Hom.comp
                (DayTensor.map
                  (Hom.comp TI (Hom.comp (DayTensor.map dM dN) S)) dK)
                S)))))) := by
  simp only [Hom.comp_assoc]
  rw [hgroup, step1, step2, step3, step4]

```

### 5.3.563 F4a closed pair elimination $\beta$

**Statement.** **F4a closed unpair  $\beta$ :** for closed first-order components the redex `unpair (pair M N) K` and its contractum `app (app K M) N` have equal `FragCert.denote`.

**Proof.** This is an instance of the symmetric-monoidal core of closed pair elimination  $\beta$ , applied to the definition of the combined Day split of both contexts, the fact that the closed context split is cocommutative, the fact that the closed context split is coassociative, the definition of the tensor product introduction, the definition of the tensor product elimination, the definition of the evaluation fragment first order and the definition of the denotation.

#### Lean 4 source `QLambda/Linear/FragmentUnpairBeta.lean`

```

theorem fragment_unpair_beta {A B C : Ty} {M N K : Term}
  (hA : Ty.FirstOrder A) (hB : Ty.FirstOrder B) (hC : Ty.SemanticFragment C)
  (cM : FragCert.Closed M A) (cN : FragCert.Closed N B)
  (cK : FragCert.Closed K (.arrow .lin A (.arrow .lin B C))) :
  FragCert.denote
    (.unpair CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil hA hB hC
      (.pair CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil hA hB cM cN)
      cK) =
  FragCert.denote
    (.appL CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil hB hC
      (.appL CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil hA
        (Ty.SemanticFragment.arrowLin hB hC) cK cM)
      cN) :=
unpair_beta_aux (FragmentContext.combinedOSplit CtxUAllBit.nil OSplit.nil)
  combinedOSplit_nil_braiding combinedOSplit_nil_coassoc
  (FragmentContext.tensorIntro hA hB) (FragmentContext.tensorElim hA hB)
  (tensorElim_comp_tensorIntro hA hB)
  (FragmentContext.evalFragmentFirstOrder hA _)
  (FragmentContext.evalFragmentFirstOrder hB _)
  (FragCert.denote cM) (FragCert.denote cN) (FragCert.denote cK)

```

### 5.3.564 Closed pair elimination $\beta$ at unit

**Statement.** Closed unpair  $\beta$  at unit  $\otimes$  unit.

**Proof.** This is an instance of the **F4a closed pair elimination**  $\beta$ , applied to the definition of the unit, the unit for semantic fragments and the definition of the closed term unit certificate.

#### Lean 4 source `QLambda/Linear/FragmentUnpairBeta.lean`

```
theorem fragment_unpair_beta_unit {K : Term}
  (cK : FragCert.Closed K
    (.arrow .lin .unit (.arrow .lin .unit .unit))) :
  FragCert.denote
    (.unpair CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil
      Ty.FirstOrder.unit Ty.FirstOrder.unit Ty.SemanticFragment.unit
      (.pair CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil
        Ty.FirstOrder.unit Ty.FirstOrder.unit
        FragCert.closed_unit_cert FragCert.closed_unit_cert)
      cK) =
  FragCert.denote
    (.appL CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil
      Ty.FirstOrder.unit Ty.SemanticFragment.unit
      (.appL CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil
        Ty.FirstOrder.unit
        (Ty.SemanticFragment.arrowLin Ty.FirstOrder.unit
          Ty.SemanticFragment.unit)
        cK FragCert.closed_unit_cert)
      FragCert.closed_unit_cert) :=
  fragment_unpair_beta Ty.FirstOrder.unit Ty.FirstOrder.unit
    Ty.SemanticFragment.unit FragCert.closed_unit_cert
    FragCert.closed_unit_cert cK
```

### 5.3.565 Closed pair elimination $\beta$ at bit $\otimes$ bit

**Statement.** Closed unpair  $\beta$  at bit  $\otimes$  bit.

**Proof.** This is an instance of the **F4a closed pair elimination**  $\beta$ , applied to the definition of the bit, the bit for semantic fragments and the definition of the closed term bit lit certificate.

#### Lean 4 source `QLambda/Linear/FragmentUnpairBeta.lean`

```
theorem fragment_unpair_beta_bit {K : Term} (b_1 b_2 : Bool)
  (cK : FragCert.Closed K (.arrow .lin .bit (.arrow .lin .bit .bit))) :
  FragCert.denote
    (.unpair CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil
      Ty.FirstOrder.bit Ty.FirstOrder.bit Ty.SemanticFragment.bit
      (.pair CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil
        Ty.FirstOrder.bit Ty.FirstOrder.bit
        (FragCert.closed_bitLit_cert b_1) (FragCert.closed_bitLit_cert b_2))
      cK) =
  FragCert.denote
    (.appL CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil
      Ty.FirstOrder.bit Ty.SemanticFragment.bit
      (.appL CtxUAllBit.nil CtxLAllSomeFragment.nil OSplit.nil
        Ty.FirstOrder.bit
        (Ty.SemanticFragment.arrowLin Ty.FirstOrder.bit
```

```

        Ty.SemanticFragment.bit)
        cK (FragCert.closed_bitLit_cert b_1))
        (FragCert.closed_bitLit_cert b_2)) :=
fragment_unpair_beta Ty.FirstOrder.bit Ty.FirstOrder.bit
    Ty.SemanticFragment.bit (FragCert.closed_bitLit_cert b_1)
    (FragCert.closed_bitLit_cert b_2) cK

/-! ## Open-context linear/unrestricted b on `FragCert.denote` -/

```

### 5.3.566 Fragment of the linear $\beta$ -reduction of the open move

**Statement.** Open-context linear  $\beta$ :  $\text{app } (\lambda x. M) X$  denotes as the body precomposed with the argument move, for arbitrary contexts and certificates.

**Proof.** The goal is simplified using the transitivity for semantic equalities of circuits and congruence of function application.

#### Lean 4 source `QLambda/Linear/FragmentUnpairBeta.lean`

```

theorem fragment_betaL_open_move {Gamma Delta Delta_1 Delta_2 A B M X}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta Delta_1 Delta_2) (hAd : Ty.Admissible A) (hFO : Ty.FirstOrder A
  )
  (hB : Ty.SemanticFragment B) (hL_1 : CtxLAllSomeFragment Delta_1)
  (cBody : FragCert Gamma (some A :: Delta_1) M B) (cX : FragCert Gamma Delta_2 X A)
  :
FragCert.denote
  (.appL hGamma hDelta hs hFO hB (.lamL hGamma hL_1 hAd hFO hB cBody) cX) =
Hom.comp (FragCert.denote cBody)
  (Hom.comp
    (FragmentContext.moveArgumentIntoLinear
      (FragmentContext.unrestricted Gamma) (FragmentContext.linear Delta_1)
      (fragmentModule A))
    (Hom.comp
      (DayTensor.map
        (Hom.id
          (dayTensor (FragmentContext.unrestricted Gamma)
            (FragmentContext.linear Delta_1))))
        (FragCert.denote cX))
      (FragmentContext.combinedOSplit hGamma hs))) := by
have hfactor :
  DayTensor.map
    (FragmentContext.abstractLinear hFO (FragCert.denote cBody))
    (FragCert.denote cX) =
Hom.comp
  (DayTensor.map
    (FragmentContext.abstractLinear hFO (FragCert.denote cBody))
    (Hom.id (fragmentModule A)))
  (DayTensor.map
    (Hom.id
      (dayTensor (FragmentContext.unrestricted Gamma)
        (FragmentContext.linear Delta_1))))
    (FragCert.denote cX)) := by
simp only [Hom.comp_id, Hom.id_comp] using
  DayTensor.map_comp

```

```

      (FragmentContext.abstractLinear hFO (FragCert.denote cBody))
      (Hom.id
        (dayTensor (FragmentContext.unrestricted Gamma)
          (FragmentContext.linear Delta_1)))
      (Hom.id (fragmentModule A)) (FragCert.denote cX)
have hb :
  Hom.comp (FragmentContext.evalFragmentFirstOrder hFO (fragmentModule B))
    (DayTensor.map
      (FragmentContext.abstractLinear hFO (FragCert.denote cBody))
      (Hom.id (fragmentModule A))) =
  Hom.comp (FragCert.denote cBody)
    (FragmentContext.moveArgumentIntoLinear
      (FragmentContext.unrestricted Gamma) (FragmentContext.linear Delta_1)
      (fragmentModule A)) :=
  FragmentContext.evalFragmentFirstOrder_abstractLinear hFO
    (FragCert.denote cBody)
refine Eq.trans (fragment_subst_lin_spine hGamma hDelta hs hAd hFO hB hL_1 cBody cX)
  ?_
refine Eq.trans
  (congrArg
    (fun g =>
      Hom.comp
        (FragmentContext.evalFragmentFirstOrder hFO (fragmentModule B))
        (Hom.comp g (FragmentContext.combinedOSplit hGamma hs)))
    hfactor) ?_
exact congrArg
  (fun g =>
    Hom.comp g
      (Hom.comp
        (DayTensor.map
          (Hom.id
            (dayTensor (FragmentContext.unrestricted Gamma)
              (FragmentContext.linear Delta_1)))
            (FragCert.denote cX))
        (FragmentContext.combinedOSplit hGamma hs)))
  hb

```

### 5.3.567 Open-context unrestricted bit $\beta$

**Statement.** Open-context unrestricted bit  $\beta$ :  $\text{app } (\lambda x. M) X$  denotes as the body precomposed with the unrestricted argument move and classicalization.

**Proof.** The goal is simplified using the transitivity for semantic equalities of circuits and congruence of function application.

#### Lean 4 source `QLambda/Linear/FragmentUnpairBeta.lean`

```

theorem fragment_betaU_bit_open_move {Gamma Delta DeltaF DeltaX B M X}
  (hGamma : CtxUAllBit Gamma) (hDelta : CtxLAllSomeFragment Delta)
  (hs : OSplit Delta DeltaF DeltaX) (hAd : Ty.Admissible .bit)
  (hDup : Ty.Duplicable .bit) (hN : AllNone DeltaX)
  (hArr : Ty.SemanticFragment (.arrow .unres .bit B))
  (hB : Ty.SemanticFragment B)
  (hLF : CtxLAllSomeFragment DeltaF) (hDeltaF : AllNone DeltaF)

```

```

(cBody : FragCert (.bit :: Gamma) DeltaF M B) (cX : FragCert Gamma DeltaX X .bit)
:
FragCert.denote
  (.appU hGamma hDelta hs hN hB (.lamU hGamma hLF hAd hDup hDeltaF hArr cBody)
cX) =
  Hom.comp (FragCert.denote cBody)
    (Hom.comp
      (Hom.comp
        (FragmentContext.moveArgumentIntoUnrestricted
          (FragmentContext.unrestricted Gamma) (FragmentContext.linear DeltaF)
          classicalBitModule)
        (DayTensor.map (Hom.id (FragmentContext.combined Gamma DeltaF))
          bitClassicalize))
      (Hom.comp
        (DayTensor.map
          (Hom.id
            (dayTensor (FragmentContext.unrestricted Gamma)
              (FragmentContext.linear DeltaF)))
          (FragCert.denote cX))
        (FragmentContext.combinedOSplit hGamma hs))) := by
have hfactor :
  DayTensor.map
    (FragmentContext.abstractUnrestricted (FragCert.denote cBody))
    (FragCert.denote cX) =
  Hom.comp
    (DayTensor.map
      (FragmentContext.abstractUnrestricted (FragCert.denote cBody))
      (Hom.id (fragmentModule .bit)))
    (DayTensor.map
      (Hom.id
        (dayTensor (FragmentContext.unrestricted Gamma)
          (FragmentContext.linear DeltaF)))
      (FragCert.denote cX)) := by
simpa only [Hom.comp_id, Hom.id_comp] using
  DayTensor.map_comp
    (FragmentContext.abstractUnrestricted (FragCert.denote cBody))
    (Hom.id
      (dayTensor (FragmentContext.unrestricted Gamma)
        (FragmentContext.linear DeltaF)))
    (Hom.id (fragmentModule .bit)) (FragCert.denote cX)
have hb :
  Hom.comp (FragmentContext.evalUnrestrictedBit (fragmentModule B))
    (DayTensor.map
      (FragmentContext.abstractUnrestricted (FragCert.denote cBody))
      (Hom.id (fragmentModule .bit))) =
  Hom.comp (FragCert.denote cBody)
    (Hom.comp
      (FragmentContext.moveArgumentIntoUnrestricted
        (FragmentContext.unrestricted Gamma) (FragmentContext.linear DeltaF)
        classicalBitModule)
      (DayTensor.map (Hom.id (FragmentContext.combined Gamma DeltaF))
        bitClassicalize)) :=
  FragmentContext.evalUnrestrictedBit_abstractUnrestricted
    (FragCert.denote cBody)
refine Eq.trans
  (fragment_subst_unres_bit_spine hGamma hDelta hs hAd hDup hN hArr hB hLF hDeltaF

```

```

      cBody cX) ?_
refine Eq.trans
  (congrArg
    (fun g =>
      Hom.comp (FragmentContext.evalUnrestrictedBit (fragmentModule B))
        (Hom.comp g (FragmentContext.combinedOSplit hGamma hs)))
    hfactor) ?_
exact congrArg
  (fun g =>
    Hom.comp g
      (Hom.comp
        (DayTensor.map
          (Hom.id
            (dayTensor (FragmentContext.unrestricted Gamma)
              (FragmentContext.linear DeltaF))))
          (FragCert.denote cX))
        (FragmentContext.combinedOSplit hGamma hs)))
hb

```

### 5.3.568 Weighted source/runtime simulation witness for closed fragment programs bounded by $N$ live qubits

**Definition.** Weighted source/runtime simulation witness for closed fragment programs bounded by  $N$  live qubits: denotation exists and measurement branches match.

**Construction.** An element consists of `unit_denote`, `bit_denote`, `uses_bit`, `born_sum` and `born_instrument`, subject to the laws `measure_branch`, `uses_unit` and `uses_measure_new0`.

#### Lean 4 source `QLambda/Linear/FragmentWeightedSimulation.lean`

```

structure FragmentWeightedSimulation (N : Nat) where
  /-- Closed unit denotation agrees with Route A. -/
  unit_denote :
    FragCert.denote FragCert.closed_unit_cert =
      FragmentContext.closedPoint routeAFragmentModel.unitIntro
  /-- Closed bit denotation agrees with Route A. -/
  bit_denote :
    forall b, FragCert.denote (FragCert.closed_bitLit_cert b) =
      FragmentContext.closedPoint (routeAFragmentModel.bitLit b)
  /-- Measurement branches match Yoneda packaging. -/
  measure_branch :
    forall b, routeAFragmentModel.measureBranch b = measureBranchYoneda b
  /-- Unit/bit programs are N-bounded. -/
  uses_unit : UsesAtMostQubits N .unit
  uses_bit : forall b, UsesAtMostQubits N (.bitLit b)
  /-- Runtime Born masses are probabilities. -/
  born_sum :
    forall {q} (_hq : q <= N) (w : Fin q) (? : Runtime.RegisterState q),
      Runtime.RegisterState.measureProbability ? w false +
        Runtime.RegisterState.measureProbability ? w true = 1
  /-- Born mass agrees with Instrument branch trace at one qubit. -/
  born_instrument :
    forall (? : Runtime.RegisterState 1) (b : Bool),
      1 <= N ->

```

```

Runtime.RegisterState.measureProbability ? (0 : Fin 1) b =
  (Matrix.trace
    (((Instrument.measure (0 : Fin 1)).branchSuperoperator
      (if b then (1 : Fin 2) else 0)).cp.applyMat ?.mat)).re
/-- A nontrivial closed measured program is N-bounded when `1 <= N`. -/
uses_measure_new0 :
  1 <= N -> UsesAtMostQubits N measureNew0Program

```

### 5.3.569 Every N supplies a weighted simulation package

**Statement.** Every N supplies a weighted simulation package. Formally: `FragmentWeightedSimulation N`.

**Proof.** The claim follows from the definitions of the objects involved.

#### Lean 4 source `QLambda/Linear/FragmentWeightedSimulation.lean`

```

theorem fragmentWeightedSimulation (N : Nat) :
  FragmentWeightedSimulation N where
  unit_denote := fragment_step_denote_sound_unit _
  bit_denote := fun _ => fragment_step_denote_sound_bitLit _
  measure_branch := fragment_measStep_denote_sound_branch
  uses_unit := usesAtMost_unit N
  uses_bit := fun _ => usesAtMost_bitLit N _
  born_sum := fun {_q} _hq w ? => n_bounded_measureProbability_sum _q w ?
  born_instrument := fun ? b _hN => measureProbability_eq_instrument_branch_trace ? b
  uses_measure_new0 := fun hN =>
    UsesAtMostQubits.mono hN usesAtMost_measure_new0_cont

```

### 5.3.570 Module interpretation of a type in the fragment shape

**Definition.** Module interpretation of a type in the fragment shape. Linear first-order domains retain the representable closed structure. An unrestricted bit arrow is instead closed over the dephasing-fixed classical bit carrier, matching the interpretation of unrestricted context cells. Outside the admitted fragment this is an inert fallback.

**Construction.** Defined by cases on the input: `.unit`  $\mapsto$  the representable module at 1; `.bit` | `.qubit`  $\mapsto$  the representable module at 2; `.tensor A B`  $\mapsto$  the representable module of the product of the hilbert dimension of A and the hilbert dimension of B; `.arrow .lin A B`  $\mapsto$  the internal morphism representable of the hilbert dimension of A and the fragment module of B; `.arrow .unres .bit B`  $\mapsto$  the Day internal morphism of the classical bit superoperator module and the fragment module of B; `.arrow .unres _ _`  $\mapsto$  the representable module at 1; `.var _` | `.mu _`  $\mapsto$  the representable module at 1.

#### Lean 4 source `QLambda/Linear/PresheafFragmentModel.lean`

```

noncomputable def fragmentModule : Ty -> Module
| .unit => representable 1
| .bit | .qubit => representable 2
| .tensor A B => representable (A.hilbertDim * B.hilbertDim)
| .arrow .lin A B =>
  internalHomRepresentable A.hilbertDim (fragmentModule B)
| .arrow .unres .bit B =>
  dayInternalHom classicalBitModule (fragmentModule B)

```

```
| .arrow .unres _ _ => representable 1
| .var _ | .mu _ => representable 1
```

### 5.3.571 Fragment module of a unit

**Statement.** The fragment module of a unit equals the representable module at 1.

**Proof.** By definition. The left-hand side is the fragment module of a unit; the fragment module is defined by cases, and its defining clause for a unit returns the representable module at 1, which is literally the right-hand side. No computation beyond unfolding this clause is needed.

**Lean 4 source** [QLambda/Linear/PresheafFragmentModel.lean](#)

```
@[simp] theorem fragmentModule_unit :
  fragmentModule .unit = representable 1 := rfl
```

### 5.3.572 Fragment module of a bit

**Statement.** The fragment module of a bit equals the representable module at 2.

**Proof.** By definition. The left-hand side is the fragment module of a bit; the fragment module is defined by cases, and its defining clause for a bit returns the representable module at 2, which is literally the right-hand side. No computation beyond unfolding this clause is needed.

**Lean 4 source** [QLambda/Linear/PresheafFragmentModel.lean](#)

```
@[simp] theorem fragmentModule_bit :
  fragmentModule .bit = representable 2 := rfl
```

### 5.3.573 Fragment module of a qubit

**Statement.** The fragment module of a qubit equals the representable module at 2.

**Proof.** By definition. Unfolding the fragment module turns the left-hand side, the fragment module of a qubit, into the right-hand side, the representable module at 2; the two sides are the same term.

**Lean 4 source** [QLambda/Linear/PresheafFragmentModel.lean](#)

```
@[simp] theorem fragmentModule_qubit :
  fragmentModule .qubit = representable 2 := rfl
```

### 5.3.574 Fragment module, assuming first-order type

**Statement.** For a type A: if A is a first-order type, then the fragment module of A equals the representable module of the dimension of h.

**Proof.** By induction on the derivation that A is a first-order type. The cases of a unit, a bit and a qubit are immediate; for a tensor product, the claim is checked directly. The goal is simplified using the definition of the fragment module.

**Lean 4 source** [QLambda/Linear/PresheafFragmentModel.lean](#)



```

theorem fragmentModule_of_firstOrder {A : Ty} (h : Ty.FirstOrder A) :
  fragmentModule A = representable h.dimension := by
  induction h with
  | unit => rfl
  | bit => rfl
  | qubit => rfl
  | tensor hA hB =>
    simp only [fragmentModule]
    rfl

```

### 5.3.575 Bit preparation from a Boolean literal

**Definition.** Bit preparation from a Boolean literal.

**Construction.** Defined by an explicit formula built from the isometric basis preparation.

**Lean 4 source** [QLambda/Linear/PresheafFragmentModel.lean](#)

```

noncomputable def bitPrepare (b : Bool) : Superoperator 1 2 :=
  if b then SigmaMon.ChoiSum.isometricBasisPrep 1
  else SigmaMon.ChoiSum.isometricBasisPrep 0

```

### 5.3.576 Definition of the bit lit morphism

**Definition.** The bit lit morphism of  $b$  is a module morphism from `dayTensorUnit` to `representable 2`.

**Construction.** Defined to be the Yoneda image of the bit prepare of  $b$ .

**Lean 4 source** [QLambda/Linear/PresheafFragmentModel.lean](#)

```

noncomputable def bitLitHom (b : Bool) :
  Hom dayTensorUnit (representable 2) :=
  yonedaMap (bitPrepare b)

```

### 5.3.577 Bit dephase of a composite of the bit prepare

**Statement.** For a bit  $b$ : the composite of the bit dephase superoperator after the bit prepare of  $b$  equals the bit prepare of  $b$ .

**Proof.** By case analysis on the bit  $b$ . The goal is simplified using the definition of the bit prepare and the fact that computational-basis preparations are fixed by dephasing.

**Lean 4 source** [QLambda/Linear/PresheafFragmentModel.lean](#)

```

theorem bitDephase_comp_bitPrepare (b : Bool) :
  Superoperator.comp bitDephaseSuperoperator (bitPrepare b) =
    bitPrepare b := by
  cases b <|> simp only [bitPrepare]
  * exact bitDephase_comp_isometricBasisPrep 0
  * exact bitDephase_comp_isometricBasisPrep 1

```

### 5.3.578 Forgetting then classicalizing is computational-basis dephasing

**Statement.** Forgetting then classicalizing is computational-basis dephasing. Formally:  $\text{Hom.comp classicalBitInclusion bitClassicalize} = \text{yonedaMap bitDephaseSuperoperator}$ .

**Proof.** Both sides are compared pointwise (by extensionality).

**Lean 4 source** `QLambda/Linear/PresheafFragmentModel.lean`

```
theorem classicalBitInclusion_comp_bitClassicalize :
  Hom.comp classicalBitInclusion bitClassicalize =
    yonedaMap bitDephaseSuperoperator := by
  ext n x
  rfl
```

### 5.3.579 Bit literals are already classical: inclusion recovers them after classicalization

**Statement.** Bit literals are already classical: inclusion recovers them after classicalization. Formally:  $\text{Hom.comp classicalBitInclusion} (\text{Hom.comp bitClassicalize} (\text{bitLitHom } b)) = \text{bitLitHom } b$ .

**Proof.** The key step rewrites with the fact that forgetting then classicalizing is computational-basis dephasing, the definition of the bit lit morphism, the fact that the Yoneda image preserves composition and the bit dephase of a composite of the bit prepare.

**Lean 4 source** `QLambda/Linear/PresheafFragmentModel.lean`

```
theorem classicalBitInclusion_comp_bitClassicalize_bitLit (b : Bool) :
  Hom.comp classicalBitInclusion
    (Hom.comp bitClassicalize (bitLitHom b)) =
    bitLitHom b := by
  change Hom.comp
    (Hom.comp classicalBitInclusion bitClassicalize) (bitLitHom b) =
    bitLitHom b
  rw [classicalBitInclusion_comp_bitClassicalize]
  -- `yonedaMap dephase comp yonedaMap prep = yonedaMap (dephase comp prep)`
  simp only [bitLitHom, <- yonedaMap_comp, bitDephase_comp_bitPrepare]
```

### 5.3.580 Primitive as a Yoneda map on its Hilbert IO dimensions

**Definition.** Primitive as a Yoneda map on its Hilbert IO dimensions.

**Construction.** Defined to be the Yoneda image of the primitive superoperator of  $p$ .

**Lean 4 source** `QLambda/Linear/PresheafFragmentModel.lean`

```
noncomputable def primYoneda (p : Prim) :
  Hom (representable (CQ.QDim p.inputQ))
    (representable (CQ.QDim p.outputQ)) :=
  yonedaMap (Prim.superoperator p)
```

### 5.3.581 Measurement instrument branches as Yoneda maps

**Definition.** Measurement instrument branches as Yoneda maps.

**Construction.** Defined by an explicit formula built from the Yoneda image and the measurement.

**Lean 4 source** `QLambda/Linear/PresheafFragmentModel.lean`

```
noncomputable def measureBranchYoneda (b : Bool) :
  Hom (representable 2) (representable 2) :=
  yonedaMap
    ((Instrument.measure (0 : Fin 1)).branchSuperoperator (if b then 1 else 0))
```

### 5.3.582 Minimum semantic interface for the fragment (no global bang / LNL)

**Definition.** Minimum semantic interface for the fragment (no global bang / LNL).

**Construction.** An element consists of `ty`, `bitDiscard`, `bitCopy`, `bitLit`, `unitIntro`, `primMap` and `measureBranch`, subject to the laws `prim_agrees` and `ty_eq_fragmentModule`.

**Lean 4 source** `QLambda/Linear/PresheafFragmentModel.lean`

```
structure PresheafFragmentModel where
  /-- Object assignment for every fragment type. -/
  ty : forall {A}, Ty.SemanticFragment A -> Module
  /-- Classical-bit discard. -/
  bitDiscard : Hom (representable 2) dayTensorUnit
  /-- Classical-bit copy into the actual coend Day tensor square. -/
  bitCopy :
    Hom (representable 2) (dayTensor (representable 2) (representable 2))
  /-- Boolean constants. -/
  bitLit : Bool -> Hom dayTensorUnit (representable 2)
  /-- Unit point. -/
  unitIntro : Hom dayTensorUnit (representable 1)
  /-- Primitive embeddings on Hilbert dimensions. -/
  primMap : forall p : Prim,
    Hom (representable (CQ.QDim p.inputQ))
      (representable (CQ.QDim p.outputQ))
  /-- Measurement branch maps. -/
  measureBranch : Bool -> Hom (representable 2) (representable 2)
  /-- Agreement with the intrinsic superoperator presentation. -/
  prim_agrees :
    forall p, primMap p = yonedaMap (Prim.superoperator p)
  /-- Fragment objects are the syntactic `fragmentModule`. -/
  ty_eq_fragmentModule :
    forall {A} (h : Ty.SemanticFragment A), ty h = fragmentModule A
```

### 5.3.583 Route A model: direct fragment semantics

**Definition.** Route A model: direct fragment semantics.

**Construction.** Constructed by supplying each component: type, bit discard, bit copy, bit literal, unit introduction, primitive interpretation, measurement branch and primitive agrees, among others. The accompanying laws are verified from the definitions.

### Lean 4 source `QLambda/Linear/PresheafFragmentModel.lean`

```
noncomputable def routeAFragmentModel : PresheafFragmentModel where
  ty := fun {A} _ => fragmentModule A
  bitDiscard := bitDiscard
  bitCopy := Hom.comp (dayTensorRepresentableIso 2 2).inv bitCopy
  bitLit := bitLitHom
  unitIntro := yonedaMap (Superoperator.identity 1)
  primMap := primYoneda
  measureBranch := measureBranchYoneda
  prim_agrees := fun _ => rfl
  ty_eq_fragmentModule := fun _ => rfl
```

### 5.3.584 Route A acceptance: fragment objects and structural maps exist without a global bang

**Statement.** Route A acceptance: fragment objects and structural maps exist without a global bang.

**Proof.** The witness is assembled directly from its components.

### Lean 4 source `QLambda/Linear/PresheafFragmentModel.lean`

```
theorem routeA_fragment_acceptance :
  (forall {A : Ty} (h : Ty.SemanticFragment A),
    routeAFragmentModel.ty h = fragmentModule A) /\
  (forall p, routeAFragmentModel.primMap p =
    yonedaMap (Prim.superoperator p)) /\
  (routeAFragmentModel.bitDiscard =
    yonedaMap SigmaMon.ChoiSum.discardTwo) :=
  <routeAFragmentModel.ty_eq_fragmentModule,
    routeAFragmentModel.prim_agrees, rfl>
```

### 5.3.585 Named Route A success marker: a concrete presheaf fragment matrix model exists (type objects)

**Definition.** Named Route A success marker: a concrete `PresheafFragmentModel` exists (type objects, bit discard/copy, prim/measure maps). This does **not** include open-context denotation or runtime adequacy.

**Construction.** Defined to be the nonempty of the presheaf fragment matrix model.

### Lean 4 source `QLambda/Linear/PresheafFragmentModel.lean`

```
def RouteASucceeded : Prop :=
  Nonempty PresheafFragmentModel
```

### 5.3.586 Route-A fragment model of the succeeded

**Statement.** `RouteASucceeded`. Formally: `RouteASucceeded`.

**Proof.** The witness is assembled directly from its components, using the definition of the route-A fragment model.

### Lean 4 source `QLambda/Linear/PresheafFragmentModel.lean`

```
theorem routeA_succeeded : RouteASucceeded :=
  <routeAFragmentModel>
```

### 5.3.587 Mathematical record that Route A supplies the maps required by the minimum type/constant interface

**Statement.** Mathematical record that Route A supplies the maps required by the minimum type/constant interface, so the ordered B–F tree is not entered for that gate.

**Proof.** The witness is assembled directly from its components.

#### Lean 4 source `QLambda/Linear/PresheafFragmentModel.lean`

```
theorem routeA_skips_ordered_bang_routes :
  (forall {A : Ty} (h : Ty.SemanticFragment A),
    exists M : Module, routeAFragmentModel.ty h = M) /\
  (exists ? : Hom (representable 2) dayTensorUnit,
    ? = routeAFragmentModel.bitDiscard) /\
  (exists ? : Hom (representable 2)
    (dayTensor (representable 2) (representable 2)),
    ? = routeAFragmentModel.bitCopy) :=
<fun h => <routeAFragmentModel.ty h, rfl>,
  <routeAFragmentModel.bitDiscard, rfl>,
  <routeAFragmentModel.bitCopy, rfl>>
```

### 5.3.588 Types admitted by the minimum CP-presheaf source semantics

**Definition.** Types admitted by the minimum CP-presheaf source semantics.

**Construction.** Generated by the rules `ofFirstOrder`, `arrowLin` and `arrowUnresBit`. Every element arises from finitely many applications of these rules, so properties are proved by induction over them.

#### Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```
inductive SemanticFragment : Ty -> Prop where
| ofFirstOrder {A} : FirstOrder A -> SemanticFragment A
| arrowLin {A B} :
  FirstOrder A -> SemanticFragment B -> SemanticFragment (.arrow .lin A B)
| arrowUnresBit {B} :
  SemanticFragment B -> SemanticFragment (.arrow .unres .bit B)
```

### 5.3.589 Unit for semantic fragments

**Statement.** `.unit` lies in the semantic fragment. Formally: `SemanticFragment .unit`.

**Proof.** Built directly by the a construction from a first-order type rule.

#### Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```
theorem unit : SemanticFragment .unit :=
  .ofFirstOrder .unit
```

### 5.3.590 Bit for semantic fragments

**Statement.** `.bit` lies in the semantic fragment. Formally: `SemanticFragment .bit`.

**Proof.** Built directly by the a construction from a first-order type rule.

**Lean 4 source** [QLambda/Linear/SemanticFragment.lean](#)

```
theorem bit : SemanticFragment .bit :=  
  .ofFirstOrder .bit
```

### 5.3.591 Qubit for semantic fragments

**Statement.** `.qubit` lies in the semantic fragment. Formally: `SemanticFragment .qubit`.

**Proof.** Built directly by the a construction from a first-order type rule.

**Lean 4 source** [QLambda/Linear/SemanticFragment.lean](#)

```
theorem qubit : SemanticFragment .qubit :=  
  .ofFirstOrder .qubit
```

### 5.3.592 Tensor product for semantic fragments

**Statement.** For types `A`, `B`: if `A` is a first-order type and `B` is a first-order type, then `.tensor A B` lies in the semantic fragment.

**Proof.** Built directly by the a construction from a first-order type rule.

**Lean 4 source** [QLambda/Linear/SemanticFragment.lean](#)

```
theorem tensor {A B : Ty} (hA : FirstOrder A) (hB : FirstOrder B) :  
  SemanticFragment (.tensor A B) :=  
  .ofFirstOrder (.tensor hA hB)
```

### 5.3.593 Every first-order type is in the semantic fragment

**Statement.** Every first-order type is in the semantic fragment. Formally: `SemanticFragment A`.

**Proof.** Built directly by the a construction from a first-order type rule.

**Lean 4 source** [QLambda/Linear/SemanticFragment.lean](#)

```
theorem of_firstOrder {A : Ty} (h : FirstOrder A) : SemanticFragment A :=  
  .ofFirstOrder h
```

### 5.3.594 Executable checker for the minimum fragment

**Definition.** Executable checker for the minimum fragment.

**Construction.** Defined by cases on the input: `.unit` | `.bit` | `.qubit`  $\mapsto$  true; `.tensor A B`  $\mapsto$  the Boolean first-order check of `&&` and the Boolean first-order check of `B`; `.arrow .lin A B`  $\mapsto$  the Boolean first-order check of `&&`, the Boolean semantic-fragment check, `B`; `.arrow .unres .bit B`  $\mapsto$  the Boolean semantic-fragment check of `B`; `_`  $\mapsto$  false.

### Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```
def semanticFragmentB : Ty -> Bool
| .unit | .bit | .qubit => true
| .tensor A B => A.firstOrderB && B.firstOrderB
| .arrow .lin A B => A.firstOrderB && semanticFragmentB B
| .arrow .unres .bit B => semanticFragmentB B
| _ => false
```

#### 5.3.595 Soundness of the Boolean semantic-fragment check

**Statement.** For a type  $A$ : if `semanticFragmentB A` evaluates to true, then  $A$  lies in the semantic fragment.

**Proof.** By case analysis on the type  $A$ . For a unit, a bit and a qubit, the claim is one of the premises of the rule; for a tensor product and a function type, the claim is checked directly; the cases of a function type, a variable and a recursive type cannot occur, since it contradicts the hypothesis that `semanticFragmentB A` evaluates to true. The goal is simplified using the definition of the Boolean semantic-fragment check, standard identities for Booleans, the unit for semantic fragments and the bit for semantic fragments.

### Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```
theorem semanticFragmentB_sound {A : Ty} (h : semanticFragmentB A = true) :
  SemanticFragment A := by
  match A with
  | .unit => exact unit
  | .bit => exact bit
  | .qubit => exact qubit
  | .tensor A B =>
    simp only [semanticFragmentB, Bool.and_eq_true] at h
    exact tensor (firstOrderB_sound h.1) (firstOrderB_sound h.2)
  | .arrow .lin A B =>
    simp only [semanticFragmentB, Bool.and_eq_true] at h
    exact .arrowLin (firstOrderB_sound h.1) (semanticFragmentB_sound h.2)
  | .arrow .unres .bit B =>
    simp only [semanticFragmentB] at h
    exact .arrowUnresBit (semanticFragmentB_sound h)
  | .arrow .unres .unit B | .arrow .unres .qubit B
  | .arrow .unres (.var _) B | .arrow .unres (.tensor _ _) B
  | .arrow .unres (.arrow _ _ _) B | .arrow .unres (.mu _) B =>
    simp [semanticFragmentB] at h
  | .var _ | .mu _ => simp [semanticFragmentB] at h
```

#### 5.3.596 Not of the variable for semantic fragments

**Statement.** For a natural number  $n$ : it is not the case that `.var n` lies in the semantic fragment.

**Proof.** The hypotheses are unpacked into their constituent data.

### Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```
theorem not_var {n : Nat} : not SemanticFragment (.var n) := by
  intro h; cases h; rename_i hFO; cases hFO
```

### 5.3.597 Not of the recursive type for semantic fragments

**Statement.** For a type A: it is not the case that `.mu A` lies in the semantic fragment.

**Proof.** The hypotheses are unpacked into their constituent data.

**Lean 4 source** `QLambda/Linear/SemanticFragment.lean`

```
theorem not_mu {A : Ty} : not SemanticFragment (.mu A) := by
  intro h; cases h; rename_i hFO; cases hFO
```

### 5.3.598 Primitive types lie in the fragment

**Statement.** Primitive types lie in the fragment. Formally: `SemanticFragment (primTy p)`.

**Proof.** By case analysis on the primitive p. For fresh-qubit allocation, the Pauli-X gate, the Hadamard gate, the T gate, reset, a Y-rotation and the controlled-NOT gate, the claim is checked directly.

**Lean 4 source** `QLambda/Linear/SemanticFragment.lean`

```
theorem primTy_fragment (p : Prim) : SemanticFragment (primTy p) := by
  cases p with
  | new0 => exact .arrowLin .unit qubit
  | x | h | t | reset => exact .arrowLin .qubit qubit
  | ry _ => exact .arrowLin .qubit qubit
  | cx =>
    exact .arrowLin .qubit (.arrowLin .qubit (tensor .qubit .qubit))
```

### 5.3.599 Formula for the function type of the unrestricted

**Statement.** For types A, B: if `.arrow .unres A B` lies in the semantic fragment, then A equals the bit.

**Proof.** By case analysis on the derivation that `.arrow .unres A B` lies in the semantic fragment. The case of a construction from a first-order type cannot occur; the case of a function type unrestricted bit is immediate.

**Lean 4 source** `QLambda/Linear/SemanticFragment.lean`

```
theorem arrow_unres_eq {A B : Ty} (h : SemanticFragment (.arrow .unres A B)) :
  A = .bit := by
  cases h with
  | ofFirstOrder hFO => cases hFO
  | arrowUnresBit _ => rfl
```

### 5.3.600 The not function type unrestricted non bit

**Statement.** For types A, B: if  $A \neq \text{.bit}$ , then it is not the case that `.arrow .unres A B` lies in the semantic fragment.

**Proof.** It follows from the hypothesis that  $A \neq \text{.bit}$ .

**Lean 4 source** `QLambda/Linear/SemanticFragment.lean`



```

theorem not_arrow_unres_non_bit {A B : Ty} (hne : A != .bit) :
  not SemanticFragment (.arrow .unres A B) := by
  intro h
  exact hne (arrow_unres_eq h)

```

### 5.3.601 The not function type unrestricted unit

**Statement.** For a type `cod`: it is not the case that `.arrow .unres .unit cod` lies in the semantic fragment.

**Proof.** The hypotheses are unpacked into their constituent data. It follows from the not function type unrestricted non bit.

#### Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```

theorem not_arrow_unres_unit (cod : Ty) :
  not SemanticFragment (.arrow .unres .unit cod) := by
  intro h
  exact not_arrow_unres_non_bit (by intro h'; cases h') h

```

### 5.3.602 Function type of the unrestricted cod for semantic fragments

**Statement.** For types `A, B`: if `.arrow .unres A B` lies in the semantic fragment, then `B` lies in the semantic fragment.

**Proof.** By case analysis on the derivation that `.arrow .unres A B` lies in the semantic fragment. The case of a construction from a first-order type cannot occur; for a function type unrestricted bit, the claim is one of the premises of the rule.

#### Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```

theorem arrow_unres_cod {A B : Ty} (h : SemanticFragment (.arrow .unres A B)) :
  SemanticFragment B := by
  cases h with
  | ofFirstOrder hFO => cases hFO
  | arrowUnresBit hB => exact hB

```

### 5.3.603 Function type of the linear inverse for semantic fragments

**Statement.** For types `A, B`: if `.arrow .lin A B` lies in the semantic fragment, then `A` is a first-order type and `B` lies in the semantic fragment.

**Proof.** By case analysis on the derivation that `.arrow .lin A B` lies in the semantic fragment. The case of a construction from a first-order type cannot occur; for a function type linear, the claim is checked directly.

#### Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```

theorem arrow_lin_inv {A B : Ty} (h : SemanticFragment (.arrow .lin A B)) :
  FirstOrder A /\ SemanticFragment B := by
  cases h with
  | ofFirstOrder hFO => cases hFO
  | arrowLin hA hB => exact <hA, hB>

```

### 5.3.604 Tensor product of the first-order type for semantic fragments

**Statement.** For types  $A, B$ : if  $\text{.tensor } A \ B$  lies in the semantic fragment, then  $A$  is a first-order type and  $B$  is a first-order type.

**Proof.** By case analysis on the derivation that  $\text{.tensor } A \ B$  lies in the semantic fragment. For a construction from a first-order type, the claim is checked directly.

#### Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```
theorem tensor_firstOrder {A B : Ty} (h : SemanticFragment (.tensor A B)) :
  FirstOrder A /\ FirstOrder B := by
  cases h with
  | ofFirstOrder hFO =>
    cases hFO with
    | tensor hA hB => exact <hA, hB>
```

### 5.3.605 Formula for the Boolean semantic-fragment check

**Statement.** For a type  $A$ : if  $A$  lies in the semantic fragment, then the Boolean semantic-fragment check of  $A$  equals `true`.

**Proof.** By case analysis on the derivation that  $A$  lies in the semantic fragment. For a construction from a first-order type, a function type linear and a function type unrestricted bit, the claim is checked directly. The goal is simplified using the definition of the Boolean semantic-fragment check and the formula for the Boolean first-order check.

#### Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```
theorem semanticFragmentB_eq {A : Ty} (h : SemanticFragment A) : semanticFragmentB A =
  true := by
  cases h with
  | ofFirstOrder hFO =>
    cases hFO with
    | unit => rfl
    | bit => rfl
    | qubit => rfl
    | tensor hA hB =>
      simp [semanticFragmentB, Ty.firstOrderB_eq hA, Ty.firstOrderB_eq hB]
  | arrowLin hFO hB =>
    simp [semanticFragmentB, Ty.firstOrderB_eq hFO, semanticFragmentB_eq hB]
  | arrowUnresBit hB =>
    simp [semanticFragmentB, semanticFragmentB_eq hB]
```

### 5.3.606 Every unrestricted context type lies in the semantic fragment

**Definition.** Every unrestricted context type lies in the semantic fragment.

**Construction.** Defined to be  $\forall \{A\}, A \in \Gamma \rightarrow \text{Ty.SemanticFragment } A$ .

#### Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```
def CtxUAllFragment (Gamma : List Ty) : Prop :=
  forall ?A?, A in Gamma -> Ty.SemanticFragment A
```

### 5.3.607 Route-A unrestricted contexts contain only classical-bit binders

**Definition.** Route-A unrestricted contexts contain only classical-bit binders. This is stronger than merely requiring all entries to be fragment types and is the discipline needed by direct bit weakening/contraction.

**Construction.** Defined to be  $\forall \{A\}, A \in \Gamma \rightarrow A = \text{.bit}$ .

**Lean 4 source** [QLambda/Linear/SemanticFragment.lean](#)

```
def CtxUAllBit (Gamma : List Ty) : Prop :=
  forall ?A?, A in Gamma -> A = .bit
```

### 5.3.608 Every occupied linear context cell lies in the semantic fragment

**Definition.** Every occupied linear context cell lies in the semantic fragment.

**Construction.** Defined to be  $\forall \{A\}, \text{some } A \in \Delta \rightarrow \text{Ty.SemanticFragment } A$ .

**Lean 4 source** [QLambda/Linear/SemanticFragment.lean](#)

```
def CtxLAllSomeFragment (Delta : List (Option Ty)) : Prop :=
  forall ?A?, some A in Delta -> Ty.SemanticFragment A
```

### 5.3.609 Empty list for all-fragment unrestricted contexts

**Statement.** Every unrestricted variable of `[]` has a fragment type. Formally: `CtxUAllFragment []`.

**Proof.** The hypotheses are unpacked into their constituent data.

**Lean 4 source** [QLambda/Linear/SemanticFragment.lean](#)

```
theorem nil : CtxUAllFragment [] := by
  intro A h
  cases h
```

### 5.3.610 Extended list for all-fragment unrestricted contexts

**Statement.** For a type `A`, an unrestricted context  $\Gamma$ : if `A` lies in the semantic fragment and every unrestricted variable of  $\Gamma$  has a fragment type, then every unrestricted variable of `A` has a fragment type.

**Proof.** By case analysis on `hm`. For membership at the head and membership in the tail, the claim is checked directly. It follows from the hypothesis that `A` lies in the semantic fragment and the hypothesis that every unrestricted variable of  $\Gamma$  has a fragment type.

**Lean 4 source** [QLambda/Linear/SemanticFragment.lean](#)

```
theorem cons {A : Ty} {Gamma : List Ty}
  (hA : Ty.SemanticFragment A) (hGamma : CtxUAllFragment Gamma) :
  CtxUAllFragment (A :: Gamma) := by
  intro A' hm
  cases hm with
  | head => exact hA
  | tail _ hm => exact hGamma hm
```

### 5.3.611 Context lookup

**Statement.** For an unrestricted context  $\Gamma$ : if every unrestricted variable of  $\Gamma$  has a fragment type and position  $n$  of  $\Gamma$  holds  $A$ , then  $A$  lies in the semantic fragment.

**Proof.** This is an instance of the hypothesis that every unrestricted variable of  $\Gamma$  has a fragment type, applied to the fact that a looked-up entry is a member of the list.

**Lean 4 source** [QLambda/Linear/SemanticFragment.lean](#)

```
theorem lookup {Gamma : List Ty} (hGamma : CtxUAllFragment Gamma) {n A}
  (h : Lookup Gamma n A) : Ty.SemanticFragment A :=
  hGamma (Lookup.mem h)
```

### 5.3.612 Empty list for all-bit unrestricted contexts

**Statement.** Every unrestricted variable of  $[]$  has bit type. Formally:  $\text{CtxUAllBit } []$ .

**Proof.** The hypotheses are unpacked into their constituent data.

**Lean 4 source** [QLambda/Linear/SemanticFragment.lean](#)

```
theorem nil : CtxUAllBit [] := by
  intro A h
  cases h
```

### 5.3.613 Extended list for all-bit unrestricted contexts

**Statement.** For an unrestricted context  $\Gamma$ : if every unrestricted variable of  $\Gamma$  has bit type, then every unrestricted variable of  $.bit$  has bit type.

**Proof.** By case analysis on  $hm$ . The case of membership at the head is immediate; for membership in the tail, the claim is checked directly. It follows from the hypothesis that every unrestricted variable of  $\Gamma$  has bit type.

**Lean 4 source** [QLambda/Linear/SemanticFragment.lean](#)

```
theorem cons {Gamma : List Ty} (hGamma : CtxUAllBit Gamma) :
  CtxUAllBit (.bit :: Gamma) := by
  intro A hm
  cases hm with
  | head => rfl
  | tail _ hm => exact hGamma hm
```

### 5.3.614 Context lookup

**Statement.** For an unrestricted context  $\Gamma$ , a natural number  $n$ , a type  $A$ : if every unrestricted variable of  $\Gamma$  has bit type and position  $n$  of  $\Gamma$  holds  $A$ , then  $A$  equals the bit.

**Proof.** This is an instance of the hypothesis that every unrestricted variable of  $\Gamma$  has bit type, applied to the fact that a looked-up entry is a member of the list.

**Lean 4 source** [QLambda/Linear/SemanticFragment.lean](#)

```

theorem lookup {Gamma : List Ty} (hGamma : CtxUAllBit Gamma) {n : Nat} {A : Ty}
  (h : Lookup Gamma n A) : A = .bit :=
  hGamma (Lookup.mem h)

```

### 5.3.615 Fragment for all-bit unrestricted contexts

**Statement.** For an unrestricted context  $\Gamma$ : if every unrestricted variable of  $\Gamma$  has bit type, then every unrestricted variable of  $\Gamma$  has a fragment type.

**Proof.** The key step rewrites with the hypothesis that every unrestricted variable of  $\Gamma$  has bit type and the bit for semantic fragments.

#### Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```

theorem fragment {Gamma : List Ty} (hGamma : CtxUAllBit Gamma) :
  CtxUAllFragment Gamma := by
  intro A hm
  rw [hGamma hm]
  exact Ty.SemanticFragment.bit

```

### 5.3.616 Empty list for fully occupied fragment linear contexts

**Statement.** Every cell of the linear context  $[]$  is occupied by a fragment type.

**Proof.** The hypotheses are unpacked into their constituent data.

#### Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```

theorem nil : CtxLAllSomeFragment [] := by
  intro A h
  cases h

```

### 5.3.617 Extended list of an absent cell for fully occupied fragment linear contexts

**Statement.** For a linear context  $\Delta$ : if every cell of the linear context  $\Delta$  is occupied by a fragment type, then every cell of the linear context  $\text{none} :: \Delta$  is occupied by a fragment type.

**Proof.** By case analysis on  $hm$ . The goal is simplified using standard identities for lists and the hypothesis that every cell of the linear context  $\Delta$  is occupied by a fragment type.

#### Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```

theorem cons_none {Delta : List (Option Ty)} (hDelta : CtxLAllSomeFragment Delta) :
  CtxLAllSomeFragment (none :: Delta) := by
  intro A hm
  simp only [List.mem_cons] at hm
  rcases hm with heq | hm
  * cases heq
  * exact hDelta hm

```

### 5.3.618 Extended list of an occupied cell for fully occupied fragment linear contexts

**Statement.** For a type  $A$ , a linear context  $\Delta$ : if  $A$  lies in the semantic fragment and every cell of the linear context  $\Delta$  is occupied by a fragment type, then every cell of the linear context  $\text{some } A$  is occupied by a fragment type.

**Proof.** By case analysis on  $hm$ . The goal is simplified using standard identities for lists, standard identities for options and the hypothesis that every cell of the linear context  $\Delta$  is occupied by a fragment type.

**Lean 4 source** `QLambda/Linear/SemanticFragment.lean`

```
theorem cons_some {A : Ty} {Delta : List (Option Ty)}  
  (hA : Ty.SemanticFragment A) (hDelta : CtxLAllSomeFragment Delta) :  
  CtxLAllSomeFragment (some A :: Delta) := by  
  intro A' hm  
  simp only [List.mem_cons] at hm  
  rcases hm with heq | hm  
  * exact Option.some_inj.mp heq |> hA  
  * exact hDelta hm
```

### 5.3.619 Context lookup

**Statement.** For a linear context  $\Delta$ , a natural number  $n$ , a type  $A$ : if every cell of the linear context  $\Delta$  is occupied by a fragment type and position  $n$  of  $\Delta$  holds  $\text{some } A$ , then  $A$  lies in the semantic fragment.

**Proof.** This is an instance of the hypothesis that every cell of the linear context  $\Delta$  is occupied by a fragment type, applied to the fact that a looked-up entry is a member of the list.

**Lean 4 source** `QLambda/Linear/SemanticFragment.lean`

```
theorem lookup {Delta : List (Option Ty)} (hDelta : CtxLAllSomeFragment Delta)  
  {n : Nat} {A : Ty} (h : Lookup Delta n (some A)) : Ty.SemanticFragment A :=  
  hDelta (Lookup.mem h)
```

### 5.3.620 A fully occupied fragment linear context obtained from an ordered context split of the left

**Statement.** For linear contexts  $\Delta$ ,  $\Delta_1$ ,  $\Delta_2$ : if every cell of the linear context  $\Delta$  is occupied by a fragment type and  $\Delta$  splits into the left part  $\Delta_1$  and the right part  $\Delta_2$ , then every cell of the linear context  $\Delta_1$  is occupied by a fragment type.

**Proof.** It follows from the hypothesis that every cell of the linear context  $\Delta$  is occupied by a fragment type.

**Lean 4 source** `QLambda/Linear/SemanticFragment.lean`

```
theorem of_oSplit_left {Delta Delta_1 Delta_2 : List (Option Ty)}  
  (hDelta : CtxLAllSomeFragment Delta) (h : OSplit Delta Delta_1 Delta_2) :  
  CtxLAllSomeFragment Delta_1 := by  
  intro A hm  
  exact hDelta (OSplit.mem_left h hm)
```

### 5.3.621 A fully occupied fragment linear context obtained from an ordered context split of the right

**Statement.** For linear contexts  $\Delta$ ,  $\Delta_1$ ,  $\Delta_2$ : if every cell of the linear context  $\Delta$  is occupied by a fragment type and  $\Delta$  splits into the left part  $\Delta_1$  and the right part  $\Delta_2$ , then every cell of the linear context  $\Delta_2$  is occupied by a fragment type.

**Proof.** It follows from the hypothesis that every cell of the linear context  $\Delta$  is occupied by a fragment type.

#### Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```
theorem of_oSplit_right {Delta Delta_1 Delta_2 : List (Option Ty)}  
  (hDelta : CtxLAllSomeFragment Delta) (h : OSplit Delta Delta_1 Delta_2) :  
  CtxLAllSomeFragment Delta_2 := by  
  intro A hm  
  exact hDelta (OSplit.mem_right h hm)
```

### 5.3.622 One-wire quotation type is in the fragment

**Statement.** One-wire quotation type is in the fragment. Formally: `Ty.SemanticFragment Command.quotationTy`.

**Proof.** It follows from the definition of the quotation type.

#### Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```
theorem quotationTy_semanticFragment :  
  Ty.SemanticFragment Command.quotationTy := by  
  unfold Command.quotationTy  
  exact .arrowUnresBit  
    (.arrowLin .qubit (Ty.SemanticFragment.tensor .qubit .bit))
```

### 5.3.623 Two-wire quotation type is in the fragment

**Statement.** Two-wire quotation type is in the fragment. Formally: `Ty.SemanticFragment Command.GeneralQuotation.quotationTy`.

**Proof.** It follows from the definition of the quotation type.

#### Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```
theorem generalQuotationTy_semanticFragment :  
  Ty.SemanticFragment Command.GeneralQuotation.quotationTy := by  
  unfold Command.GeneralQuotation.quotationTy  
  Command.GeneralQuotation.resultTy  
  Command.GeneralQuotation.qubitRegisterTy  
  exact .arrowUnresBit  
    (.arrowLin .qubit  
      (.arrowLin .qubit  
        (Ty.SemanticFragment.tensor (.tensor .qubit .qubit) .bit)))
```

### 5.3.624 Terms whose annotations and constructors stay inside the minimum fragment (no `fix` / fold / unfolding)

**Definition.** Terms whose annotations and constructors stay inside the minimum fragment (no `fix` / fold / unfold).

**Construction.** Generated by the rules `var`, `lam`, `app`, `unit`, `bitLit`, `pair`, `unpair`, `ite`, `prim` and `measure`. Every element arises from finitely many applications of these rules, so properties are proved by induction over them.

#### Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```
inductive SemanticFragment : Term -> Prop where
| var {? n} : SemanticFragment (.var ? n)
| lam {? A M} :
  Ty.SemanticFragment A -> SemanticFragment M ->
  SemanticFragment (.lam ? A M)
| app {F X} :
  SemanticFragment F -> SemanticFragment X -> SemanticFragment (.app F X)
| unit : SemanticFragment .unit
| bitLit {b} : SemanticFragment (.bitLit b)
| pair {M N} :
  SemanticFragment M -> SemanticFragment N -> SemanticFragment (.pair M N)
| unpair {M K} :
  SemanticFragment M -> SemanticFragment K -> SemanticFragment (.unpair M K)
| ite {B T E} :
  SemanticFragment B -> SemanticFragment T -> SemanticFragment E ->
  SemanticFragment (.ite B T E)
| prim {p} : SemanticFragment (.prim p)
| measure {Q K} :
  SemanticFragment Q -> SemanticFragment K -> SemanticFragment (.measure Q K)
```

### 5.3.625 Not of the least fixed point for terms

**Statement.** For a type `A`, a term `M`: it is not the case that `.fix A M` lies in the semantic fragment.

**Proof.** The hypotheses are unpacked into their constituent data.

#### Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```
theorem not_fix {A : Ty} {M : Term} : not SemanticFragment (.fix A M) := by
  intro h; cases h
```

### 5.3.626 Not of the fold for terms

**Statement.** For a type `A`, a term `M`: it is not the case that `.fold A M` lies in the semantic fragment.

**Proof.** The hypotheses are unpacked into their constituent data.

#### Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```
theorem not_fold {A : Ty} {M : Term} : not SemanticFragment (.fold A M) := by
  intro h; cases h
```



### 5.3.627 Not of the unfolding for terms

**Statement.** For a term  $M$ : it is not the case that  $\text{.unfold } M$  lies in the semantic fragment.

**Proof.** The hypotheses are unpacked into their constituent data.

**Lean 4 source** [QLambda/Linear/SemanticFragment.lean](#)

```
theorem not_unfold {M : Term} : not SemanticFragment (.unfold M) := by
  intro h; cases h
```

### 5.3.628 Membership in the semantic fragment passes from a lambda abstraction to its body

**Statement.** If  $\text{Term.lam } \kappa \ A \ M$  lies in the semantic fragment, then  $M$  lies in the semantic fragment.

**Proof.** By case analysis on the derivation that  $\text{Term.lam } \kappa \ A \ M$  lies in the semantic fragment. Only the rule for a lambda abstraction can produce it, and the claim is one of that rule's premises.

**Lean 4 source** [QLambda/Linear/SemanticFragment.lean](#)

```
theorem lam_body {? A M} (h : SemanticFragment (Term.lam ? A M)) : SemanticFragment M
  := by
  cases h with | lam _ hM => exact hM
```

### 5.3.629 Membership in the semantic fragment passes from a lambda abstraction to its dom

**Statement.** If  $\text{Term.lam } \kappa \ A \ M$  lies in the semantic fragment, then  $A$  lies in the semantic fragment.

**Proof.** By case analysis on the derivation that  $\text{Term.lam } \kappa \ A \ M$  lies in the semantic fragment. Only the rule for a lambda abstraction can produce it, and the claim is one of that rule's premises.

**Lean 4 source** [QLambda/Linear/SemanticFragment.lean](#)

```
theorem lam_dom {? A M} (h : SemanticFragment (Term.lam ? A M)) : Ty.SemanticFragment
  A := by
  cases h with | lam hA _ => exact hA
```

### 5.3.630 Membership in the semantic fragment passes from an application to its function part

**Statement.** If  $\text{Term.app } F \ X$  lies in the semantic fragment, then  $F$  lies in the semantic fragment.

**Proof.** By case analysis on the derivation that  $\text{Term.app } F \ X$  lies in the semantic fragment. Only the rule for an application can produce it, and the claim is one of that rule's premises.

**Lean 4 source** [QLambda/Linear/SemanticFragment.lean](#)

```
theorem app_fn {F X} (h : SemanticFragment (Term.app F X)) : SemanticFragment F := by
  cases h with | app hF _ => exact hF
```

### 5.3.631 Membership in the semantic fragment passes from an application to its argument

**Statement.** If `Term.app F X` lies in the semantic fragment, then `X` lies in the semantic fragment.

**Proof.** By case analysis on the derivation that `Term.app F X` lies in the semantic fragment. Only the rule for an application can produce it, and the claim is one of that rule's premises.

**Lean 4 source** [QLambda/Linear/SemanticFragment.lean](#)

```
theorem app_arg {F X} (h : SemanticFragment (Term.app F X)) : SemanticFragment X := by
  cases h with | app _ hX => exact hX
```

### 5.3.632 Membership in the semantic fragment passes from a pair to its left component

**Statement.** If `Term.pair M N` lies in the semantic fragment, then `M` lies in the semantic fragment.

**Proof.** By case analysis on the derivation that `Term.pair M N` lies in the semantic fragment. Only the rule for a pair can produce it, and the claim is one of that rule's premises.

**Lean 4 source** [QLambda/Linear/SemanticFragment.lean](#)

```
theorem pair_left {M N} (h : SemanticFragment (Term.pair M N)) : SemanticFragment M :=
  by
  cases h with | pair hM _ => exact hM
```

### 5.3.633 Membership in the semantic fragment passes from a pair to its right component

**Statement.** If `Term.pair M N` lies in the semantic fragment, then `N` lies in the semantic fragment.

**Proof.** By case analysis on the derivation that `Term.pair M N` lies in the semantic fragment. Only the rule for a pair can produce it, and the claim is one of that rule's premises.

**Lean 4 source** [QLambda/Linear/SemanticFragment.lean](#)

```
theorem pair_right {M N} (h : SemanticFragment (Term.pair M N)) : SemanticFragment N
:= by
  cases h with | pair _ hN => exact hN
```

### 5.3.634 Membership in the semantic fragment passes from a pair elimination to its left component

**Statement.** If `Term.unpair M K` lies in the semantic fragment, then `M` lies in the semantic fragment.

**Proof.** By case analysis on the derivation that `Term.unpair M K` lies in the semantic fragment. Only the rule for a pair elimination can produce it, and the claim is one of that rule's premises.

**Lean 4 source** [QLambda/Linear/SemanticFragment.lean](#)

```
theorem unpair_left {M K} (h : SemanticFragment (Term.unpair M K)) : SemanticFragment
  M := by
  cases h with | unpair hM _ => exact hM
```

### 5.3.635 Membership in the semantic fragment passes from a pair elimination to its right component

**Statement.** If `Term.unpair M K` lies in the semantic fragment, then `K` lies in the semantic fragment.

**Proof.** By case analysis on the derivation that `Term.unpair M K` lies in the semantic fragment. Only the rule for a pair elimination can produce it, and the claim is one of that rule's premises.

**Lean 4 source** [QLambda/Linear/SemanticFragment.lean](#)

```
theorem unpair_right {M K} (h : SemanticFragment (Term.unpair M K)) : SemanticFragment K := by
  cases h with | unpair _ hK => exact hK
```

### 5.3.636 Membership in the semantic fragment passes from a conditional to its condition

**Statement.** If `Term.ite B T E` lies in the semantic fragment, then `B` lies in the semantic fragment.

**Proof.** By case analysis on the derivation that `Term.ite B T E` lies in the semantic fragment. Only the rule for a conditional can produce it, and the claim is one of that rule's premises.

**Lean 4 source** [QLambda/Linear/SemanticFragment.lean](#)

```
theorem ite_cond {B T E} (h : SemanticFragment (Term.ite B T E)) : SemanticFragment B := by
  cases h with | ite hB _ _ => exact hB
```

### 5.3.637 Membership in the semantic fragment passes from a conditional to its then-branch

**Statement.** If `Term.ite B T E` lies in the semantic fragment, then `T` lies in the semantic fragment.

**Proof.** By case analysis on the derivation that `Term.ite B T E` lies in the semantic fragment. Only the rule for a conditional can produce it, and the claim is one of that rule's premises.

**Lean 4 source** [QLambda/Linear/SemanticFragment.lean](#)

```
theorem ite_then {B T E} (h : SemanticFragment (Term.ite B T E)) : SemanticFragment T := by
  cases h with | ite _ hT _ => exact hT
```

### 5.3.638 Membership in the semantic fragment passes from a conditional to its else-branch

**Statement.** If `Term.ite B T E` lies in the semantic fragment, then `E` lies in the semantic fragment.

**Proof.** By case analysis on the derivation that `Term.ite B T E` lies in the semantic fragment. Only the rule for a conditional can produce it, and the claim is one of that rule's premises.

**Lean 4 source** [QLambda/Linear/SemanticFragment.lean](#)

```
theorem ite_else {B T E} (h : SemanticFragment (Term.ite B T E)) : SemanticFragment E := by
  cases h with | ite _ _ hE => exact hE
```

### 5.3.639 Membership in the semantic fragment passes from a measurement to its qubit argument

**Statement.** If `Term.measure Q K` lies in the semantic fragment, then `Q` lies in the semantic fragment.

**Proof.** By case analysis on the derivation that `Term.measure Q K` lies in the semantic fragment. Only the rule for a measurement can produce it, and the claim is one of that rule's premises.

#### Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```
theorem measure_qubit {Q K} (h : SemanticFragment (Term.measure Q K)) :  
  SemanticFragment Q := by  
  cases h with | measure hQ _ => exact hQ
```

### 5.3.640 Membership in the semantic fragment passes from a measurement to its continuation

**Statement.** If `Term.measure Q K` lies in the semantic fragment, then `K` lies in the semantic fragment.

**Proof.** By case analysis on the derivation that `Term.measure Q K` lies in the semantic fragment. Only the rule for a measurement can produce it, and the claim is one of that rule's premises.

#### Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```
theorem measure_cont {Q K} (h : SemanticFragment (Term.measure Q K)) :  
  SemanticFragment K := by  
  cases h with | measure _ hK => exact hK
```

### 5.3.641 The linear de Bruijn shift stays in the semantic fragment

**Statement.** For natural numbers `d`, `cutoff`, a term `M`: if `M` lies in the semantic fragment, then `shiftLin d cutoff M` lies in the semantic fragment.

**Proof.** The claim follows from the definitions of the objects involved.

#### Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```
theorem shiftLin_semanticFragment {d cutoff : Nat} :  
  forall {M : Term}, SemanticFragment M -> SemanticFragment (shiftLin d cutoff M)  
| .var .lin n, h => by  
  cases h  
  change SemanticFragment  
  (.var .lin (if n < cutoff then n else n + d))  
  split <|> exact .var  
| .var .unres n, h => by cases h; exact .var  
| .lam .lin A M, .lam hA hM =>  
  .lam hA (shiftLin_semanticFragment (cutoff := cutoff + 1) hM)  
| .lam .unres A M, .lam hA hM =>  
  .lam hA (shiftLin_semanticFragment (cutoff := cutoff) hM)  
| .app F X, .app hF hX =>  
  .app (shiftLin_semanticFragment hF) (shiftLin_semanticFragment hX)  
| .unit, .unit => .unit  
| .bitLit b, .bitLit => .bitLit  
| .pair M N, .pair hM hN =>  
  .pair (shiftLin_semanticFragment hM) (shiftLin_semanticFragment hN)  
| .unpair M K, .unpair hM hK =>  
  .unpair (shiftLin_semanticFragment hM) (shiftLin_semanticFragment hK)
```

```

| .ite B T E, .ite hB hT hE =>
  .ite (shiftLin_semanticFragment hB) (shiftLin_semanticFragment hT)
  (shiftLin_semanticFragment hE)
| .prim p, .prim => .prim
| .measure Q K, .measure hQ hK =>
  .measure (shiftLin_semanticFragment hQ) (shiftLin_semanticFragment hK)

```

### 5.3.642 The unrestricted de Bruijn shift stays in the semantic fragment

**Statement.** For natural numbers  $d$ , cutoff, a term  $M$ : if  $M$  lies in the semantic fragment, then  $\text{shiftUnres } d \text{ cutoff } M$  lies in the semantic fragment.

**Proof.** The claim follows from the definitions of the objects involved.

#### Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```

theorem shiftUnres_semanticFragment {d cutoff : Nat} :
  forall {M : Term}, SemanticFragment M -> SemanticFragment (shiftUnres d cutoff
M)
| .var .unres n, h => by
  cases h
  change SemanticFragment
    (.var .unres (if n < cutoff then n else n + d))
  split <|> exact .var
| .var .lin n, h => by cases h; exact .var
| .lam .unres A M, .lam hA hM =>
  .lam hA (shiftUnres_semanticFragment (cutoff := cutoff + 1) hM)
| .lam .lin A M, .lam hA hM =>
  .lam hA (shiftUnres_semanticFragment (cutoff := cutoff) hM)
| .app F X, .app hF hX =>
  .app (shiftUnres_semanticFragment hF) (shiftUnres_semanticFragment hX)
| .unit, .unit => .unit
| .bitLit b, .bitLit => .bitLit
| .pair M N, .pair hM hN =>
  .pair (shiftUnres_semanticFragment hM) (shiftUnres_semanticFragment hN)
| .unpair M K, .unpair hM hK =>
  .unpair (shiftUnres_semanticFragment hM) (shiftUnres_semanticFragment hK)
| .ite B T E, .ite hB hT hE =>
  .ite (shiftUnres_semanticFragment hB) (shiftUnres_semanticFragment hT)
  (shiftUnres_semanticFragment hE)
| .prim p, .prim => .prim
| .measure Q K, .measure hQ hK =>
  .measure (shiftUnres_semanticFragment hQ) (shiftUnres_semanticFragment hK)

```

### 5.3.643 The linear substitution stays in the semantic fragment

**Statement.** For a natural number  $k$ , terms  $V, M$ : if  $V$  lies in the semantic fragment and  $M$  lies in the semantic fragment, then  $\text{substLin } k \text{ } V \text{ } M$  lies in the semantic fragment.

**Proof.** The claim follows from the definitions of the objects involved.

#### Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```

theorem substLin_semanticFragment {k : Nat} {V : Term} (hV : SemanticFragment V) :

```

```

forall {M : Term}, SemanticFragment M -> SemanticFragment (substLin k V M)
| .var .lin n, h => by
  cases h
  simp only [substLin]
  split
  * exact .var
  * split
    * exact shiftLin_semanticFragment (d := k) (cutoff := 0) hV
    * exact .var
| .var .unres n, h => by cases h; exact .var
| .lam .lin A M, .lam hA hM =>
  .lam hA (substLin_semanticFragment (k := k + 1) hV hM)
| .lam .unres A M, .lam hA hM =>
  .lam hA
    (substLin_semanticFragment (k := k)
      (shiftUnres_semanticFragment (d := 1) (cutoff := 0) hV) hM)
| .app F X, .app hF hX =>
  .app (substLin_semanticFragment hV hF) (substLin_semanticFragment hV hX)
| .unit, .unit => .unit
| .bitLit b, .bitLit => .bitLit
| .pair M N, .pair hM hN =>
  .pair (substLin_semanticFragment hV hM) (substLin_semanticFragment hV hN)
| .unpair M K, .unpair hM hK =>
  .unpair (substLin_semanticFragment hV hM) (substLin_semanticFragment hV hK)
| .ite B T E, .ite hB hT hE =>
  .ite (substLin_semanticFragment hV hB) (substLin_semanticFragment hV hT)
    (substLin_semanticFragment hV hE)
| .prim p, .prim => .prim
| .measure Q K, .measure hQ hK =>
  .measure (substLin_semanticFragment hV hQ) (substLin_semanticFragment hV hK)

```

### 5.3.644 The unrestricted substitution stays in the semantic fragment

**Statement.** For a natural number  $k$ , terms  $V, M$ : if  $V$  lies in the semantic fragment and  $M$  lies in the semantic fragment, then  $\text{substUnres } k \ V \ M$  lies in the semantic fragment.

**Proof.** The claim follows from the definitions of the objects involved.

#### Lean 4 source `QLambda/Linear/SemanticFragment.lean`

```

theorem substUnres_semanticFragment {k : Nat} {V : Term} (hV : SemanticFragment V) :
  forall {M : Term}, SemanticFragment M -> SemanticFragment (substUnres k V M)
| .var .unres n, h => by
  cases h
  simp only [substUnres]
  split
  * exact .var
  * split
    * exact shiftUnres_semanticFragment (d := k) (cutoff := 0) hV
    * exact .var
| .var .lin n, h => by cases h; exact .var
| .lam .unres A M, .lam hA hM =>
  .lam hA (substUnres_semanticFragment (k := k + 1) hV hM)
| .lam .lin A M, .lam hA hM =>
  .lam hA

```

```

      (substUnres_semanticFragment (k := k)
        (shiftLin_semanticFragment (d := 1) (cutoff := 0) hV) hM)
| .app F X, .app hF hX =>
  .app (substUnres_semanticFragment hV hF) (substUnres_semanticFragment hV hX)
| .unit, .unit => .unit
| .bitLit b, .bitLit => .bitLit
| .pair M N, .pair hM hN =>
  .pair (substUnres_semanticFragment hV hM) (substUnres_semanticFragment hV hN)
| .unpair M K, .unpair hM hK =>
  .unpair (substUnres_semanticFragment hV hM) (substUnres_semanticFragment hV hK)
| .ite B T E, .ite hB hT hE =>
  .ite (substUnres_semanticFragment hV hB) (substUnres_semanticFragment hV hT)
    (substUnres_semanticFragment hV hE)
| .prim p, .prim => .prim
| .measure Q K, .measure hQ hK =>
  .measure (substUnres_semanticFragment hV hQ) (substUnres_semanticFragment hV hK)

```

### 5.3.645 Closed fragment judgments: empty contexts, fragment result and term

**Definition.** Closed fragment judgments: empty contexts, fragment result and term.

**Construction.** Defined to be  $\text{HasType } [] \ [] \ M \ A \wedge \text{Ty.SemanticFragment } A \wedge \text{Term.SemanticFragment } M$ .

**Lean 4 source** [QLambda/Linear/SemanticFragment.lean](#)

```

def ClosedSemanticFragment (M : Term) (A : Ty) : Prop :=
  HasType [] [] M A /\ Ty.SemanticFragment A /\ Term.SemanticFragment M

```

### 5.3.646 Representable module of a first-order type

**Definition.** Representable module of a first-order type.

**Construction.** Defined to be the closed term representable of the dimension of  $h$ .

**Lean 4 source** [QLambda/Linear/TypeInterpretation.lean](#)

```

noncomputable def object {A : Ty} (h : FirstOrder A) : ClosedGenerated :=
  closedRepresentable h.dimension

```

### 5.3.647 Object of the module for first-order types

**Statement.** For a type  $A$ : if  $A$  is a first-order type, then  $(\text{object } h) . \text{module}$  equals the representable module of the dimension of  $h$ .

**Proof.** By definition. Unfolding the module turns the left-hand side,  $(\text{object } h) . \text{module}$ , into the right-hand side, the representable module of the dimension of  $h$ ; the two sides are the same term.

**Lean 4 source** [QLambda/Linear/TypeInterpretation.lean](#)

```

theorem object_module {A : Ty} (h : FirstOrder A) :
  (object h).module = representable h.dimension :=
  rfl

```

### 5.3.648 Tensor of first-order types is the Day tensor of their representables

**Statement.** Tensor of first-order types is the Day tensor of their representables. Formally: `(object (.tensor hA hB)).module = dayTensorRepresentable hA.dimension hB.dimension`.

**Proof.** By definition. Unfolding the module turns the left-hand side, `(object (.tensor hA hB)).module`, into the right-hand side, the Day tensor product representable of the dimension of `hA` and the dimension of `hB`; the two sides are the same term.

**Lean 4 source** `QLambda/Linear/TypeInterpretation.lean`

```
theorem object_tensor {A B : Ty}
  (hA : FirstOrder A) (hB : FirstOrder B) :
  (object (.tensor hA hB)).module =
    dayTensorRepresentable hA.dimension hB.dimension :=
  rfl
```

---

## 6 Deterministic Staging to Circuits

The circuit-normal fragment has statically bounded qubit and classical registers. A prefix allocator produces `Fin q` wire indices and proves freshness, distinctness, and bounds. Fresh-qubit allocation lowers to reset on a fresh physical wire.

Staging is a fuelled call-by-value evaluator. Lambdas, including higher-order gate combinators, execute at staging time. A successful result contains first-order data only. Recursive types and general recursion remain in the language semantics but are excluded from this finite compilation fragment.

Lean proves successful staging is deterministic and preserves source type, resource typing, circuit well-formedness, and allocation bounds. The compared statements are `QLambda.Palomar.staging_deterministic`, `QLambda.Palomar.staging_well_formed`, and `QLambda.Palomar.staging_compile_agreement`. Solution defines `StagingSucceeds` as `Elaborates` and `circuitAgrees` as `CQ.Eq`. Regression examples include Bell preparation, measurement-controlled gates, reset/reuse, and higher-order gate composition.

### 6.1 Theorem dependence

well-formed Composer commands, CQ compile agreement, and OpenQASM export.

### 6.2 Blueprint declarations — Deterministic staging to circuits


*Auto-generated from the Lean sources (62 declarations). Each card states the result in mathematical English and explains the idea of its proof or construction; the Lean source follows each card.*

#### 6.2.1 The inductive definition of circuit commands


**Definition.** The inductive family of circuit commands.

**Construction.** Generated by the rules `skip`, `x`, `h`, `t`, `ry`, `cx`, `measure`, `reset`, `store`, `seq` and `branch`. Every element arises from finitely many applications of these rules, so properties are proved by induction over them.



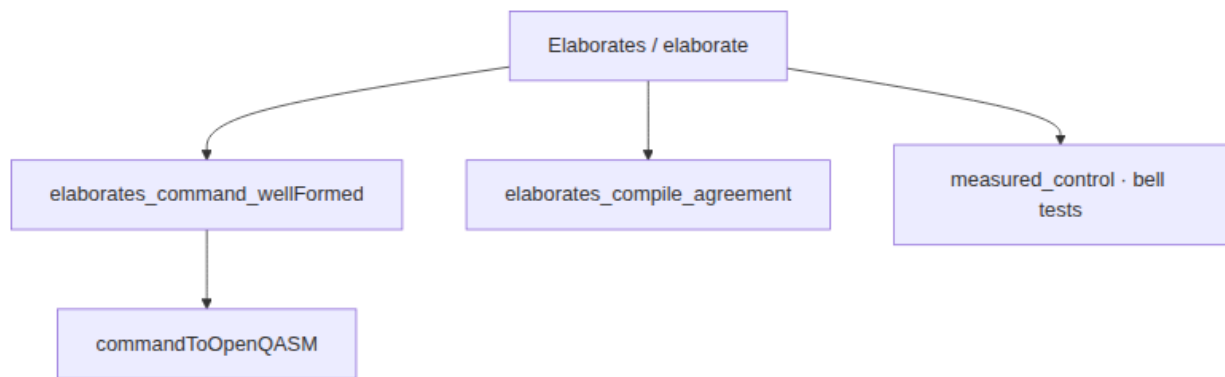

**Figure 10:** Section 6 theorem dependence: successful elaboration yields

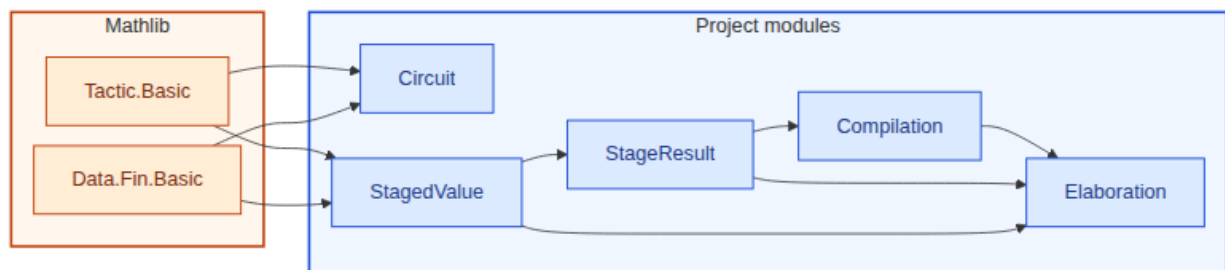

**Figure 11:** Lean module dependencies for §6 (staging to circuits). Amber box: Mathlib imports (2 listed). Blue box: project modules (5).

## Lean 4 source QLambda/Linear/Circuit.lean

```
inductive Command (q c : Nat) where
| skip
| x : Fin q -> Command q c
| h : Fin q -> Command q c
| t : Fin q -> Command q c
| ry : Composer.AngleExpr -> Fin q -> Command q c
| cx : Fin q -> Fin q -> Command q c
| measure : Fin q -> Fin c -> Command q c
| reset : Fin q -> Command q c
| store : Fin c -> Composer.CExpr c -> Command q c
| seq : Command q c -> Command q c -> Command q c
| branch : Composer.CExpr c -> Command q c -> Command q c -> Command q c
```

### 6.2.2 Structural compilation to the frozen Composer AST

**Definition.** Structural compilation to the frozen Composer AST.

**Construction.** Defined by cases on the input:  $\text{.skip} \mapsto []$ ;  $\text{.x } w \mapsto [\text{.gate } (\text{.x } w)]$ ;  $\text{.h } w \mapsto [\text{.gate } (\text{.h } w)]$ ;  $\text{.t } w \mapsto [\text{.gate } (\text{.t } w)]$ ;  $\text{.ry } \theta \ w \mapsto [\text{.gate } (\text{.ry } \theta \ w)]$ ;  $\text{.cx control target} \mapsto [\text{.gate } (\text{.cx control target})]$ ;  $\text{.measure qbit cbit} \mapsto [\text{.measure qbit cbit}]$ ;  $\text{.reset qbit} \mapsto [\text{.reset qbit}]$ ; and so on for the remaining cases.

## Lean 4 source QLambda/Linear/Circuit.lean

```
def compile {q c : Nat} : Command q c -> List (Composer.Instr q c)
| .skip => []
| .x w => [.gate (.x w)]
| .h w => [.gate (.h w)]
| .t w => [.gate (.t w)]
| .ry ? w => [.gate (.ry ? w)]
| .cx control target => [.gate (.cx control target)]
| .measure qbit cbit => [.measure qbit cbit]
| .reset qbit => [.reset qbit]
| .store cbit e => [.store cbit e]
| .seq A B => compile A ++ compile B
| .branch guard yes no => [.ite guard (compile yes) (compile no)]
```

```
/- Reflect the declared Composer fragment into canonical circuit normal form. -/
mutual
```

```
def reflectInstr {q c : Nat} : Composer.Instr q c -> Option (Command q c)
| .gate (.x w) => some (.x w)
| .gate (.h w) => some (.h w)
| .gate (.t w) => some (.t w)
| .gate (.ry ? w) => some (.ry ? w)
| .gate (.cx control target) => some (.cx control target)
| .measure qbit cbit => some (.measure qbit cbit)
| .reset qbit => some (.reset qbit)
| .store cbit e => some (.store cbit e)
| .ite guard yes no => do
  let yes' <- reflectBlock yes
  let no' <- reflectBlock no
  pure (.branch guard yes' no')
```

```

| _ => none

def reflectBlock {q c : Nat} : List (Composer.Instr q c) -> Option (Command q c)
| [] => some .skip
| i :: is => do
  let i' <- reflectInstr i
  let is' <- reflectBlock is
  pure (.seq i' is')

```

### 6.2.3 The normal form has exactly the target's ideal CQ meaning

**Definition.** The normal form has exactly the target's ideal CQ meaning.

**Construction.** Defined to be the denotation of a block of `model` and the compilation of `C`.

**Lean 4 source** [QLambda/Linear/Circuit.lean](#)

```

noncomputable def denote {q c : Nat}
  (model : Composer.Model q c) (C : Command q c) : CQ.Sem q c :=
  Composer.denoteBlock model C.compile

```

### 6.2.4 Denotation of the compilation

**Statement.** For natural numbers  $q, c$ , a circuit command  $C$ :  $\text{Eq } (\text{denoteBlock model } C.\text{compile}) (C.\text{denote model})$ .

**Proof.** It follows from the reflexivity for semantic equalities of circuits.

**Lean 4 source** [QLambda/Linear/Circuit.lean](#)

```

theorem compile_denotation {q c : Nat} (model : Composer.Model q c)
  (C : Command q c) :
  CQ.Eq (Composer.denoteBlock model C.compile) (C.denote model) := by
  exact CQ.Eq.refl _

```

### 6.2.5 Exact boundary of the circuit-completeness theorem

**Definition.** Exact boundary of the circuit-completeness theorem.

**Construction.** Defined to be  $\exists C, \text{reflectBlock is} = \text{some } C$ .

**Lean 4 source** [QLambda/Linear/Circuit.lean](#)

```

def SupportedBlock {q c : Nat} (is : List (Composer.Instr q c)) : Prop :=
  exists C, reflectBlock is = some C

```

### 6.2.6 Completeness of the circuit

**Statement.** Every supported circuit is represented by a first-order linear normal form whose compilation is exactly the original circuit. Formally:  $\exists C : \text{Command } q \ c, C.\text{compile} = \text{is} \wedge \forall \text{model} : \text{Model } q \ c, \text{Eq } (C.\text{denote model}) (\text{denoteBlock model is})$ .

**Proof.** Each component of the claim is established separately. The hypotheses are unpacked into their constituent data. The goal is simplified using the definition of the denotation.

#### Lean 4 source `QLambda/Linear/Circuit.lean`

```
theorem circuit_complete {q c : Nat} {is : List (Composer.Instr q c)}
  (h : SupportedBlock is) :
  exists C : Command q c,
    C.compile = is /\
    forall model : Composer.Model q c,
      CQ.Eq (C.denote model) (Composer.denoteBlock model is) := by
obtain <C, hC> := h
refine <C, compile_reflectBlock is C hC, ?_>
intro model
simp [denote, compile_reflectBlock is C hC] using
  (CQ.Eq.refl (Composer.denoteBlock model is))
```

### 6.2.7 Well-formed supported target circuits have well-formed exact representatives as linear circuit normal forms

**Statement.** Well-formed supported target circuits have well-formed exact representatives as linear circuit normal forms.

**Proof.** Each component of the claim is established separately. The hypotheses are unpacked into their constituent data.

#### Lean 4 source `QLambda/Linear/Circuit.lean`

```
theorem wellFormed_circuit_complete {q c : Nat}
  {is : List (Composer.Instr q c)}
  (hs : SupportedBlock is)
  (hwf : Composer.Block.WellFormedAt 0 is) :
  exists C : Command q c,
    C.compile = is /\
    Composer.Block.WellFormedAt 0 C.compile /\
    forall model : Composer.Model q c,
      CQ.Eq (C.denote model) (Composer.denoteBlock model is) := by
obtain <C, hcompile, hdenote> := circuit_complete hs
exact <C, hcompile, hcompile.symm |> hwf, hdenote>
```

### 6.2.8 Static conditions not already enforced by `Fin` indices

**Definition.** Static conditions not already enforced by `Fin` indices.

**Construction.** Generated by the rules `skip`, `x`, `h`, `t`, `ry`, `cx`, `measure`, `reset`, `store`, `seq` and `branch`. Every element arises from finitely many applications of these rules, so properties are proved by induction over them.

#### Lean 4 source `QLambda/Linear/Circuit.lean`

```
inductive WellFormed {q c : Nat} : Command q c -> Prop where
| skip : WellFormed .skip
| x {w} : WellFormed (.x w)
| h {w} : WellFormed (.h w)
```

```

| t {w} : WellFormed (.t w)
| ry {? w} : WellFormed (.ry ? w)
| cx {control target} : control != target -> WellFormed (.cx control target)
| measure {qbit cbit} : WellFormed (.measure qbit cbit)
| reset {qbit} : WellFormed (.reset qbit)
| store {cbit e} : WellFormed (.store cbit e)
| seq {A B} : WellFormed A -> WellFormed B -> WellFormed (.seq A B)
| branch {guard yes no} :
  WellFormed yes -> WellFormed no -> WellFormed (.branch guard yes no)

```

### 6.2.9 Block well-formedness of a concatenation

**Statement.** If `Block.WellFormedAt depth A` and `Block.WellFormedAt depth B`, then `Block.WellFormedAt depth (A ++ B)`.

**Proof.** By induction on `A`. For the empty context, the claim is checked directly; for a context extended by one cell, the claim follows from the induction hypothesis.

#### Lean 4 source `QLambda/Linear/Circuit.lean`

```

private theorem blockWellFormed_append {q c depth}
  {A B : List (Composer.Instr q c)}
  (hA : Composer.Block.WellFormedAt depth A)
  (hB : Composer.Block.WellFormedAt depth B) :
  Composer.Block.WellFormedAt depth (A ++ B) := by
  induction A with
  | nil => simp using hB
  | cons i is ih =>
    cases hA with
    | cons hi his =>
      exact .cons hi (ih his)

```

### 6.2.10 Well-formedness of the compilation

**Statement.** For natural numbers `q`, `c`, a circuit command `C`: if `C` is well formed, then `Block.WellFormedAt 0 C.compile`.

**Proof.** By induction on the derivation that `C` is well formed. The case of a skip is immediate; for the Pauli-X gate, the Hadamard gate, the T gate, a Y-rotation, the controlled-NOT gate, a measurement, reset and a store, the claim is checked directly; for a sequential composition and a branch, the claim follows from the induction hypothesis. It follows from the block well-formedness of a concatenation.

#### Lean 4 source `QLambda/Linear/Circuit.lean`

```

theorem compile_wellFormed {q c : Nat} {C : Command q c}
  (hC : C.WellFormed) : Composer.Block.WellFormedAt 0 C.compile := by
  induction hC with
  | skip => exact .nil
  | x => exact .cons (.gate trivial) .nil
  | h => exact .cons (.gate trivial) .nil
  | t => exact .cons (.gate trivial) .nil
  | ry => exact .cons (.gate trivial) .nil
  | cx hne => exact .cons (.gate hne) .nil

```

```

| measure => exact .cons .measure .nil
| reset  => exact .cons .reset .nil
| store  => exact .cons .store .nil
| seq _ _ ihA ihB =>
  exact blockWellFormed_append ihA ihB
| branch _ _ ihYes ihNo =>
  exact .cons (.ite ihYes ihNo) .nil

```

### 6.2.11 A successful compilation is proof-carrying

**Definition.** A successful compilation is proof-carrying: source typing, first-order boundary typing, allocated output resources, and target well-formedness are all retained independently of the evaluator implementation.

**Construction.** An element consists of `sourceTy`, `result`, `command`, `finalRegs` and `resources_preserved`, subject to the laws `source_typed`, `result_typed`, `first_order` and `command_wellFormed`.

#### Lean 4 source `QLambda/Linear/Compilation.lean`

```

structure Compilation (q c : Nat) (M : Term) where
  sourceTy : Ty
  result : StagedValue q c
  command : Command q c
  finalRegs : RegFile q c
  source_typed : infer [] [] M = some (sourceTy, [])
  result_typed : result.ty = sourceTy
  first_order : Ty.FirstOrder sourceTy
  resources_preserved : result.Respects finalRegs
  command_wellFormed : command.WellFormed

```

### 6.2.12 Types admitted in the recursion-free staging fragment

**Definition.** Types admitted in the recursion-free staging fragment.

**Construction.** Defined by cases on the input: `.var _`  $\mapsto$  false; `.unit` | `.bit` | `.qubit`  $\mapsto$  true; `.tensor A B`  $\mapsto$  `muFree A` && `muFree B`; `.arrow _ A B`  $\mapsto$  `muFree A` && `muFree B`; `.mu _`  $\mapsto$  false.

#### Lean 4 source `QLambda/Linear/Elaboration.lean`

```

def muFree : Ty -> Bool
| .var _ => false
| .unit | .bit | .qubit => true
| .tensor A B => muFree A && muFree B
| .arrow _ A B => muFree A && muFree B
| .mu _ => false

```

### 6.2.13 Explicit exclusion of recursive terms and recursive-type operations

**Definition.** Explicit exclusion of recursive terms and recursive-type operations.

**Construction.** Defined by cases on the input: `.var _ _` | `.unit` | `.bitLit _` | `.prim _`  $\mapsto$  true; `.lam _ A M`  $\mapsto$  the recursive type free of &&, the recursion freedom, M; `.app F X` |

```
.pair F X | .unpair F X => recursionFree F && recursionFree X; .ite B T E
=> recursionFree B && recursionFree T && recursionFree E; .measure Q K =>
recursionFree Q && recursionFree K; .fix _ _ | .fold _ _ | .unfold _ =>
false.
```

**Lean 4 source** [QLambda/Linear/Elaboration.lean](#)

```
def recursionFree : Term -> Bool
| .var _ _ | .unit | .bitLit _ | .prim _ => true
| .lam _ A M => A.muFree && recursionFree M
| .app F X | .pair F X | .unpair F X => recursionFree F && recursionFree X
| .ite B T E => recursionFree B && recursionFree T && recursionFree E
| .measure Q K => recursionFree Q && recursionFree K
| .fix _ _ | .fold _ _ | .unfold _ => false
```

### 6.2.14 Recursion freedom of a least fixed point

**Statement.** The recursion freedom of the least fixed point of  $A$  and  $M$  equals `false`.

**Proof.** By definition. The left-hand side is the recursion freedom of the least fixed point of  $A$  and  $M$ ; the recursion freedom is defined by cases, and its defining clause for a least fixed point returns `false`, which is literally the right-hand side. No computation beyond unfolding this clause is needed.

**Lean 4 source** [QLambda/Linear/Elaboration.lean](#)

```
@[simp] theorem recursionFree_fix (A M) :
  recursionFree (.fix A M) = false := rfl
```

### 6.2.15 Recursion freedom of a fold

**Statement.** The recursion freedom of the fold of  $A$  and  $M$  equals `false`.

**Proof.** By definition. Unfolding the recursion freedom turns the left-hand side, the recursion freedom of the fold of  $A$  and  $M$ , into the right-hand side, `false`; the two sides are the same term.

**Lean 4 source** [QLambda/Linear/Elaboration.lean](#)

```
@[simp] theorem recursionFree_fold (A M) :
  recursionFree (.fold A M) = false := rfl
```

### 6.2.16 Recursion freedom of an unfolding

**Statement.** The recursion freedom of the unfolding of  $M$  equals `false`.

**Proof.** By definition. Unfolding the recursion freedom turns the left-hand side, the recursion freedom of the unfolding of  $M$ , into the right-hand side, `false`; the two sides are the same term.

**Lean 4 source** [QLambda/Linear/Elaboration.lean](#)

```
@[simp] theorem recursionFree_unfold (M) :
  recursionFree (.unfold M) = false := rfl
```

### 6.2.17 Definition of the Boolean well-formedness check of circuit commands

**Definition.** The Boolean well-formedness check is a circuit command.

**Construction.** Defined by cases on the input: `.reset _` | `.store _ _`  $\mapsto$  true; `.cx control target`  $\mapsto$  the decide of the control of  $\neq$  and target; `.seq A B`  $\mapsto$  the Boolean well-formedness check of `&&` and the Boolean well-formedness check of B; `.branch _ yes no`  $\mapsto$  the Boolean well-formedness check of `&&` and the Boolean well-formedness check of no.

#### Lean 4 source `QLambda/Linear/Elaboration.lean`

```
def wellFormedB {q c : Nat} : Command q c -> Bool
| .skip | .x _ | .h _ | .t _ | .ry _ _ | .measure _ _
| .reset _ | .store _ _ => true
| .cx control target => decide (control != target)
| .seq A B => A.wellFormedB && B.wellFormedB
| .branch _ yes no => yes.wellFormedB && no.wellFormedB
```

### 6.2.18 Soundness of the Boolean well-formedness check

**Statement.** For natural numbers  $q, c$ , a circuit command  $C$ : if  $C.wellFormedB$  evaluates to true, then  $C$  is well formed.

**Proof.** By induction on the circuit command  $C$ . The cases of a skip, the Pauli-X gate, the Hadamard gate, the T gate, a Y-rotation, a measurement, reset and a store are immediate; for the controlled-NOT gate, the claim is checked directly; for a sequential composition and a branch, the claim follows from the induction hypothesis. The goal is simplified using the definition of the Boolean well-formedness check and standard identities for Booleans.

#### Lean 4 source `QLambda/Linear/Elaboration.lean`

```
theorem wellFormedB_sound {q c : Nat} {C : Command q c}
(h : C.wellFormedB = true) : C.WellFormed := by
induction C with
| skip => exact .skip
| x w => exact .x
| h w => exact .h
| t w => exact .t
| ry ? w => exact .ry
| cx control target =>
  exact .cx (by simp [wellFormedB] using h)
| measure qbit cbit => exact .measure
| reset qbit => exact .reset
| store cbit e => exact .store
| seq A B ihA ihB =>
  simp only [wellFormedB, Bool.and_eq_true] at h
  exact .seq (ihA h.1) (ihB h.2)
| branch guard yes no ihYes ihNo =>
  simp only [wellFormedB, Bool.and_eq_true] at h
  exact .branch (ihYes h.1) (ihNo h.2)
```



### 6.2.19 Well-formedness of the sequential composition

**Statement.** For natural numbers  $q, c$ , circuit commands  $A, B$ : if  $A$  is well formed and  $B$  is well formed, then  $A.\text{andThen } B$  is well formed.

**Proof.** By case analysis on the circuit command  $A$ . The goal is simplified using the definition of the sequential composition.

#### Lean 4 source `QLambda/Linear/Elaboration.lean`

```
theorem andThen_wellFormed {q c : Nat} {A B : Command q c}
  (hA : A.WellFormed) (hB : B.WellFormed) : (A.andThen B).WellFormed := by
  cases A <|> cases B <|> simp [andThen] at * <|>
  first | assumption | exact .seq hA hB
```

### 6.2.20 Definition of the environment types

**Definition.** The environment types of  $\rho$  is an unrestricted context.

**Construction.** Defined to be  $\rho.\text{map } \text{StagedValue.ty}$ .

#### Lean 4 source `QLambda/Linear/Elaboration.lean`

```
private def envTys {q c : Nat} (? : List (StagedValue q c)) : List Ty :=
  ?.map StagedValue.ty
```

### 6.2.21 Definition of the finish

**Definition.** The finish of  $A$  and  $r$  is an element of  $\text{Option } (\text{StageResult } q \ c)$ .

**Construction.** Defined to be  $\text{do let out} \leftarrow r \text{ if out.value.ty} = A \text{ then some out else none}$ .

#### Lean 4 source `QLambda/Linear/Elaboration.lean`

```
private def finish {q c : Nat} (A : Ty) (r : Option (StageResult q c)) :
  Option (StageResult q c) := do
  let out <- r
  if out.value.ty = A then some out else none
```

### 6.2.22 Definition of the concatenation of commands

**Definition.** The concatenation of commands of  $A, B$  and  $C$  is a circuit command.

**Construction.** Defined to be  $(A.\text{andThen } B).\text{andThen } C$ .

#### Lean 4 source `QLambda/Linear/Elaboration.lean`

```
private def joinCommands {q c : Nat}
  (A B C : Command q c) : Command q c :=
  (A.andThen B).andThen C

/- Fuelled deterministic CBV staging. Every recursive call spends fuel,
including compile-time beta reduction. -/
```

mutual

```

def stageFuel {q c : Nat} : Nat -> List (StagedValue q c) ->
  List (StagedValue q c) -> RegFile q c -> Term ->
  Option (StageResult q c)
| 0, _, _, _, _ => none
| fuel + 1, us, ls, ?, M =>
  match infer (envTys us) (envTys ls) M with
  | none => none
  | some (A, _) =>
    finish A <| match M with
    | .var .unres n => do
      let V <- us[n]?
      pure (.pure ? V)
    | .var .lin n => do
      let V <- ls[n]?
      pure (.pure ? V)
    | .lam ? B Body =>
      match A with
      | .arrow ?' B' C =>
        if ? = ?' /\ B = B' then
          some (.pure ? (.closure ? B C Body us ls))
        else none
      | _ => none
    | .app F X => do
      let rF <- stageFuel fuel us ls ? F
      let rX <- stageFuel fuel us ls rF.regs X
      let rA <- applyFuel fuel rX.regs rF.value rX.value
      pure
        { rA with
          command := joinCommands rF.command rX.command rA.command }
    | .unit => some (.pure ? .unit)
    | .bitLit b => some (.pure ? (.bitLit b))
    | .pair M N => do
      let rM <- stageFuel fuel us ls ? M
      let rN <- stageFuel fuel us ls rM.regs N
      pure
        { value := .pair rM.value rN.value
          command := rM.command.andThen rN.command
          regs := rN.regs }
    | .unpair M K => do
      let rM <- stageFuel fuel us ls ? M
      let (.pair V W) := rM.value | none
      let rK <- stageFuel fuel us ls rM.regs K
      let rV <- applyFuel fuel rK.regs rK.value V
      let rW <- applyFuel fuel rV.regs rV.value W
      pure
        { rW with
          command :=
            joinCommands
              (rM.command.andThen rK.command) rV.command rW.command }
    | .ite B T E => do
      let rB <- stageFuel fuel us ls ? B
      match rB.value with
      | .bitLit true =>
        let rT <- stageFuel fuel us ls rB.regs T

```

```

    pure (rT.prepend rB.command)
  | .bitLit false =>
    let rE <- stageFuel fuel us ls rB.regs E
    pure (rE.prepend rB.command)
  | .bitRef b =>
    let rT <- stageFuel fuel us ls rB.regs T
    let rE <- stageFuel fuel us ls rB.regs E
    if rT.value.same rE.value &&
      decide (rT.regs.nextQ = rE.regs.nextQ) &&
      decide (rT.regs.nextC = rE.regs.nextC) then
      some
        { value := rT.value
          command :=
            rB.command.andThen
              (.branch (.bit b) rT.command rE.command)
          regs := rT.regs }
    else none
  | _ => none
| .prim p => some (.pure ? (.prim p))
| .measure Q K => do
  let rQ <- stageFuel fuel us ls ? Q
  let (.qubit w) := rQ.value | none
  let (b, '?') <- rQ.regs.allocC
  let rK <- stageFuel fuel us ls ?' K
  let rB <- applyFuel fuel rK.regs rK.value (.bitRef b)
  let rOut <- applyFuel fuel rB.regs rB.value (.qubit w)
  pure
    { rOut with
      command :=
        joinCommands
          (rQ.command.andThen (.measure w b))
          (rK.command.andThen rB.command) rOut.command }
| .fix _ _ | .fold _ _ | .unfold _ => none

def applyFuel {q c : Nat} : Nat -> RegFile q c ->
  StagedValue q c -> StagedValue q c -> Option (StageResult q c)
| 0, _, _, _ => none
| fuel + 1, ?, F, X =>
  match F with
  | .closure ? A B Body us ls =>
    if X.ty = A then
      let out :=
        match ? with
        | .unres => stageFuel fuel (X :: us) ls ? Body
        | .lin => stageFuel fuel us (X :: ls) ? Body
      finish B out
    else none
  | .prim .new0 =>
    match X with
    | .unit => do
      let (w, '?') <- ?.allocQ
      pure <.qubit w, .reset w, ?'>
    | _ => none
  | .prim .x =>
    match X with
    | .qubit w => some <.qubit w, .x w, ?>

```

```

    | _ => none
| .prim .h =>
    match X with
    | .qubit w => some <.qubit w, .h w, ?>
    | _ => none
| .prim .t =>
    match X with
    | .qubit w => some <.qubit w, .t w, ?>
    | _ => none
| .prim (.ry ?) =>
    match X with
    | .qubit w =>
        some <.qubit w, .ry (.rational ?) w, ?>
    | _ => none
| .prim .reset =>
    match X with
    | .qubit w => some <.qubit w, .reset w, ?>
    | _ => none
| .prim .cx =>
    match X with
    | .qubit w => some (.pure ? (.cxControl w))
    | _ => none
| .cxControl control =>
    match X with
    | .qubit target =>
        if control != target then
            some
                <.pair (.qubit control) (.qubit target),
                  .cx control target, ?>
        else none
    | _ => none
| _ => none

```

### 6.2.23 Compile a closed term into a fixed finite register file

**Definition.** Compile a closed term into a fixed finite register file.

**Construction.** Defined by an explicit formula built from the recursion freedom, the type inference, the stage fuel and the empty.

#### Lean 4 source `QLambda/Linear/Elaboration.lean`

```

def elaborate {q c : Nat} (fuel : Nat) (M : Term) :
  Option (Compilation q c M) :=
  if hfree : M.recursionFree = true then
    match hty : infer [] [] M with
    | none => none
    | some (A, u) =>
      if hu : u = [] then
        match stageFuel fuel [] [] (RegFile.empty q c) M with
        | none => none
        | some out =>
          if hout : out.value.ty = A then
            if hfirst : A.firstOrderB = true then
              if hresources : out.value.respectsB out.regs = true then

```

```

    if hwf : out.command.wellFormedB = true then
      some
        { sourceTy := A
          result := out.value
          command := out.command
          finalRegs := out.regs
          source_typed := by simpa [hu] using hty
          result_typed := hout
          first_order := Ty.firstOrderB_sound hfirst
          resources_preserved :=
            StagedValue.respectsB_sound hresources
          command_wellFormed := Command.wellFormedB_sound hwf }
    else none
  else none
else none
else none
else none
else none
else none

```

#### 6.2.24 Relational interface used by metatheorems

**Definition.** Relational interface used by metatheorems.

**Construction.** Defined to be `elaborate fuel M = some out`.

**Lean 4 source** [QLambda/Linear/Elaboration.lean](#)

```

def Elaborates {q c : Nat} (fuel : Nat) (M : Term)
  (out : Compilation q c M) : Prop :=
  elaborate fuel M = some out

```

#### 6.2.25 Staging is deterministic for fixed fuel and register bounds

**Statement.** Staging is deterministic for fixed fuel and register bounds. Formally:  $P = Q$ .

**Proof.** It follows from standard identities for options.

**Lean 4 source** [QLambda/Linear/Elaboration.lean](#)

```

theorem elaborates_deterministic {q c fuel M}
  {P Q : Compilation q c M}
  (hP : Elaborates fuel M P) (hQ : Elaborates fuel M Q) : P = Q := by
  exact Option.some.inj (hP.symm.trans hQ)

```

#### 6.2.26 Successful staging preserves the source type at the first-order boundary

**Statement.** Successful staging preserves the source type at the first-order boundary. Formally: `infer [] [] M = some (P.sourceTy, []) ∧ P.result.ty = P.sourceTy ∧ Ty.FirstOrder P.sourceTy`.

**Proof.** The witness is assembled directly from its components.

**Lean 4 source** [QLambda/Linear/Elaboration.lean](#)

```

theorem elaborates_type_preservation {q c fuel M}
  {P : Compilation q c M} (_h : Elaborates fuel M P) :
  infer [] [] M = some (P.sourceTy, []) /\
    P.result.ty = P.sourceTy /\ Ty.FirstOrder P.sourceTy :=
  <P.source_typed, P.result_typed, P.first_order>

```

### 6.2.27 Every output handle belongs to the final compiler allocation prefix

**Statement.** Every output handle belongs to the final compiler allocation prefix. Formally:  $P.\text{result}.$  Respects  $P.\text{finalRegs}$ .

**Proof.** The proof term combines the facts named in it directly.

#### Lean 4 source `QLambda/Linear/Elaboration.lean`

```

theorem elaborates_resource_preservation {q c fuel M}
  {P : Compilation q c M} (_h : Elaborates fuel M P) :
  P.result.Respects P.finalRegs :=
  P.resources_preserved

```

### 6.2.28 The generated command satisfies target static well-formedness

**Statement.** The generated command satisfies target static well-formedness. Formally:  $P.\text{command}.\text{WellFormed}$ .

**Proof.** The proof term combines the facts named in it directly.

#### Lean 4 source `QLambda/Linear/Elaboration.lean`

```

theorem elaborates_command_wellFormed {q c fuel M}
  {P : Compilation q c M} (_h : Elaborates fuel M P) :
  P.command.WellFormed :=
  P.command_wellFormed

```

### 6.2.29 Allocation cursors never exceed the fixed target registers

**Statement.** Allocation cursors never exceed the fixed target registers. Formally:  $P.\text{finalRegs}.\text{nextQ} \leq q \wedge P.\text{finalRegs}.\text{nextC} \leq c$ .

**Proof.** The witness is assembled directly from its components.

#### Lean 4 source `QLambda/Linear/Elaboration.lean`

```

theorem elaborates_allocation_bounds {q c fuel M}
  {P : Compilation q c M} (_h : Elaborates fuel M P) :
  P.finalRegs.nextQ <= q /\ P.finalRegs.nextC <= c :=
  <P.finalRegs.nextQ_le, P.finalRegs.nextC_le>

```

### 6.2.30 Existing target APIs identify staged-command semantics with the semantics of its structurally compiled Composer block

**Statement.** Existing target APIs identify staged-command semantics with the semantics of its structurally compiled Composer block. Formally:  $\text{Eq } (\text{denoteBlock model } P.\text{command.compile}) (P.\text{command.denote model})$ .

**Proof.** This is an instance of the denotation of the compilation.

#### Lean 4 source `QLambda/Linear/Elaboration.lean`

```
theorem elaborates_compile_agreement {q c fuel M}
  {P : Compilation q c M} (_h : Elaborates fuel M P)
  (model : Composer.Model q c) :
  QLambda.CQ.Eq
    (Composer.denoteBlock model P.command.compile)
    (P.command.denote model) :=
  Command.compile_denotation model P.command
```

### 6.2.31 Erase certificates when only the generated command is needed

**Definition.** Erase certificates when only the generated command is needed.

**Construction.** Defined to be  $(\text{elaborate } (q := q) (c := c) \text{ fuel } M).\text{map } \text{Compilation.command}$ .

#### Lean 4 source `QLambda/Linear/Elaboration.lean`

```
def elaborateCommand {q c : Nat} (fuel : Nat) (M : Term) :
  Option (Command q c) :=
  (elaborate (q := q) (c := c) fuel M).map Compilation.command

/--! ## Executable regression terms -/
```

### 6.2.32 Executable regression terms

**Definition.** ## Executable regression terms.

**Construction.** Defined to be the application of the primitive of fresh-qubit allocation and a unit.

#### Lean 4 source `QLambda/Linear/Elaboration.lean`

```
private def newQubit : Term :=
  .app (.prim .new0) .unit
```

### 6.2.33 Bell preparation `CX (H new0) new0` with compiler-allocated inputs

**Definition.** Bell preparation `CX (H new0) new0` with compiler-allocated inputs.

**Construction.** Defined to be the application of the application of `.prim .cx` and `.app (.prim .h) newQubit` and the new qubit.

#### Lean 4 source `QLambda/Linear/Elaboration.lean`

```
def bellProgram : Term :=
  .app
    (.app (.prim .cx) (.app (.prim .h) newQubit))
    newQubit
```

### 6.2.34 Measurement followed by classically controlled X

**Definition.** Measurement followed by classically controlled X.

**Construction.** Defined to be the application of the X-basis measurement and the new qubit.

**Lean 4 source** [QLambda/Linear/Elaboration.lean](#)

```
def measuredControlProgram : Term :=
  .app measureX newQubit
```

### 6.2.35 Reset an already allocated and used wire, demonstrating wire reuse

**Definition.** Reset an already allocated and used wire, demonstrating wire reuse.

**Construction.** Defined to be the application of the primitive of reset and the application of `.prim .x` and `newQubit`.

**Lean 4 source** [QLambda/Linear/Elaboration.lean](#)

```
def resetReuseProgram : Term :=
  .app (.prim .reset) (.app (.prim .x) newQubit)
```

### 6.2.36 Definition of the gate type

**Definition.** The gate type is a type.

**Construction.** Defined to be the function type of a linear, a qubit, a qubit.

**Lean 4 source** [QLambda/Linear/Elaboration.lean](#)

```
private def gateTy : Ty :=
  .arrow .lin .qubit .qubit
```

### 6.2.37 A compile-time higher-order gate compositor

**Definition.** A compile-time higher-order gate compositor.

**Construction.** Defined by an explicit formula built from the gate type.

**Lean 4 source** [QLambda/Linear/Elaboration.lean](#)

```
def gateCompose : Term :=
  .lam .lin gateTy <|
    .lam .lin gateTy <|
      .lam .lin .qubit <|
        .app (.var .lin 2)
          (.app (.var .lin 1) (.var .lin 0))
```



### 6.2.38 Higher-order staging leaves only first-order T; H commands

**Definition.** Higher-order staging leaves only first-order T; H commands.

**Construction.** Defined to be the application of the application of `.app gateCompose (.prim .h)` and `.prim .t` and the new qubit.

**Lean 4 source** `QLambda/Linear/Elaboration.lean`

```
def higherOrderGateProgram : Term :=
  .app
    (.app
      (.app gateCompose (.prim .h))
      (.prim .t))
    newQubit
```

### 6.2.39 Definition of the w 20

**Definition.** The w 20 is an index.

**Construction.** Constructed by supplying each component of the structure explicitly.

**Lean 4 source** `QLambda/Linear/Elaboration.lean`

```
private def w20 : Fin 2 := <0, by decide>
```

### 6.2.40 Definition of the w 21

**Definition.** The w 21 is an index.

**Construction.** Constructed by supplying each component of the structure explicitly.

**Lean 4 source** `QLambda/Linear/Elaboration.lean`

```
private def w21 : Fin 2 := <1, by decide>
```

### 6.2.41 Definition of the w 10

**Definition.** The w 10 is an index.

**Construction.** Constructed by supplying each component of the structure explicitly.

**Lean 4 source** `QLambda/Linear/Elaboration.lean`

```
private def w10 : Fin 1 := <0, by decide>
```

### 6.2.42 Definition of the Boolean 10

**Definition.** The Boolean 10 is an index.

**Construction.** Constructed by supplying each component of the structure explicitly.

**Lean 4 source** `QLambda/Linear/Elaboration.lean`

```
private def b10 : Fin 1 := <0, by decide>
```

### 6.2.43 Definition of the expected result of the Bell-state program

**Definition.** The expected result of the Bell-state program is a circuit command.

**Construction.** Defined by an explicit formula built from the reset, the w 20 and the w 21.

**Lean 4 source** [QLambda/Linear/Elaboration.lean](#)

```
def bellExpected : Command 2 0 :=
  (((Command.reset w20).andThen (Command.h w20)).andThen
    (Command.reset w21)).andThen (Command.cx w20 w21)
```

### 6.2.44 Definition of the expected result of the measured control

**Definition.** The expected result of the measured control is a circuit command.

**Construction.** Defined by an explicit formula built from the reset, the w 10, the measurement and the Boolean 10.

**Lean 4 source** [QLambda/Linear/Elaboration.lean](#)

```
def measuredControlExpected : Command 1 1 :=
  (Command.reset w10).andThen
    ((Command.measure w10 b10).andThen
      (Command.branch (.bit b10) (.x w10) .skip))
```

### 6.2.45 Definition of the expected result of the reset reuse

**Definition.** The expected result of the reset reuse is a circuit command.

**Construction.** Defined by an explicit formula built from the reset and the w 10.

**Lean 4 source** [QLambda/Linear/Elaboration.lean](#)

```
def resetReuseExpected : Command 1 0 :=
  ((Command.reset w10).andThen (Command.x w10)).andThen
    (Command.reset w10)
```

### 6.2.46 Definition of the expected result of the higher order gate

**Definition.** The expected result of the higher order gate is a circuit command.

**Construction.** Defined to be (Command.reset w10).andThen ((Command.t w10).andThen (Command.h w10)).

**Lean 4 source** [QLambda/Linear/Elaboration.lean](#)

```
def higherOrderGateExpected : Command 1 0 :=
  (Command.reset w10).andThen ((Command.t w10).andThen (Command.h w10))
```

### 6.2.47 Worked check of the Bell-state program of the elaboration

**Statement.** `elaborateCommand (q := 2) (c := 0) 10 bellProgram` equals the present value the expected result of the Bell-state program.

**Proof.** By definition. Unfolding the command elaboration turns the left-hand side, `elaborateCommand (q := 2) (c := 0) 10 bellProgram`, into the right-hand side, the present value the expected result of the Bell-state program; the two sides are the same term.

**Lean 4 source** `QLambda/Linear/Elaboration.lean`

```
theorem bell_elaboration_test :  
  elaborateCommand (q := 2) (c := 0) 10 bellProgram =  
    some bellExpected := by  
  rfl
```

### 6.2.48 The measured control elaboration test

**Statement.** `elaborateCommand (q := 1) (c := 1) 12 measuredControlProgram` equals the present value the expected result of the measured control.

**Proof.** By definition. Unfolding the command elaboration turns the left-hand side, `elaborateCommand (q := 1) (c := 1) 12 measuredControlProgram`, into the right-hand side, the present value the expected result of the measured control; the two sides are the same term.

**Lean 4 source** `QLambda/Linear/Elaboration.lean`

```
theorem measured_control_elaboration_test :  
  elaborateCommand (q := 1) (c := 1) 12 measuredControlProgram =  
    some measuredControlExpected := by  
  rfl
```

### 6.2.49 The reset reuse elaboration test

**Statement.** `elaborateCommand (q := 1) (c := 0) 12 resetReuseProgram` equals the present value the expected result of the reset reuse.

**Proof.** By definition. Unfolding the command elaboration turns the left-hand side, `elaborateCommand (q := 1) (c := 0) 12 resetReuseProgram`, into the right-hand side, the present value the expected result of the reset reuse; the two sides are the same term.

**Lean 4 source** `QLambda/Linear/Elaboration.lean`

```
theorem reset_reuse_elaboration_test :  
  elaborateCommand (q := 1) (c := 0) 12 resetReuseProgram =  
    some resetReuseExpected := by  
  rfl
```

### 6.2.50 The higher order gate elaboration test

**Statement.** `elaborateCommand (q := 1) (c := 0) 12 higherOrderGateProgram` equals the present value the expected result of the higher order gate.

**Proof.** By definition. Unfolding the command elaboration turns the left-hand side, `elaborateCommand (q := 1) (c := 0) 12 higherOrderGateProgram`, into the right-hand side, the present value the expected result of the higher order gate; the two sides are the same term.

**Lean 4 source** [QLambda/Linear/Elaboration.lean](#)

```
theorem higher_order_gate_elaboration_test :
  elaborateCommand (q := 1) (c := 0) 12 higherOrderGateProgram =
    some higherOrderGateExpected := by
  rfl
```

### 6.2.51 Insufficient quantum space fails rather than wrapping or aliasing

**Statement.** Insufficient quantum space fails rather than wrapping or aliasing. Formally: `elaborateCommand (q := 1) (c := 0) 10 bellProgram = none`.

**Proof.** By definition. Unfolding the command elaboration turns the left-hand side, `elaborateCommand (q := 1) (c := 0) 10 bellProgram`, into the right-hand side, `none`; the two sides are the same term.

**Lean 4 source** [QLambda/Linear/Elaboration.lean](#)

```
theorem bell_allocation_bound_test :
  elaborateCommand (q := 1) (c := 0) 10 bellProgram = none := by
  rfl
```

### 6.2.52 Recursion and recursive types are rejected before staging

**Statement.** Recursion and recursive types are rejected before staging. Formally: `elaborateCommand (q := 1) (c := 1) 12 (.fix A M) = none`.

**Proof.** By definition. Unfolding the command elaboration turns the left-hand side, `elaborateCommand (q := 1) (c := 1) 12 (.fix A M)`, into the right-hand side, `none`; the two sides are the same term.

**Lean 4 source** [QLambda/Linear/Elaboration.lean](#)

```
theorem recursion_excluded_test (A M) :
  elaborateCommand (q := 1) (c := 1) 12 (.fix A M) = none := by
  rfl
```

### 6.2.53 Omit administrative skips while retaining source evaluation order

**Definition.** Omit administrative skips while retaining source evaluation order.

**Construction.** Defined by cases on the input: `.skip, B ↦ B; A, .skip ↦ A; A, B ↦` the sequential composition of `A` and `B`.

**Lean 4 source** [QLambda/Linear/StageResult.lean](#)

```

def andThen {q c : Nat} (A B : Command q c) : Command q c :=
  match A, B with
  | .skip, B => B
  | A, .skip => A
  | A, B => .seq A B

```

#### 6.2.54 Internal output of one staging pass

**Definition.** Internal output of one staging pass.

**Construction.** An element consists of value, command and regs.

**Lean 4 source** [QLambda/Linear/StageResult.lean](#)

```

structure StageResult (q c : Nat) where
  value : StagedValue q c
  command : Command q c
  regs : RegFile q c

```

#### 6.2.55 Definition of the pure of staging results

**Definition.** The pure of  $\rho$  and  $V$  is a staging result.

**Construction.** Constructed by supplying each component of the structure explicitly.

**Lean 4 source** [QLambda/Linear/StageResult.lean](#)

```

def pure {q c : Nat} (? : RegFile q c) (V : StagedValue q c) :
  StageResult q c :=
  <V, .skip, ?>

```

#### 6.2.56 Definition of the prepend of staging results

**Definition.** The prepend of  $A$  and  $r$  is a staging result.

**Construction.** Constructed by supplying each component of the structure explicitly.

**Lean 4 source** [QLambda/Linear/StageResult.lean](#)

```

def prepend {q c : Nat} (A : Command q c) (r : StageResult q c) :
  StageResult q c :=
  { r with command := A.andThen r.command }

```

#### 6.2.57 Compile-time values

**Definition.** Compile-time values. Closures and primitive partial applications are eliminated before a successful result crosses the staging boundary.

**Construction.** Generated by the rules `unit`, `bitLit`, `bitRef`, `qubit`, `pair`, `closure`, `prim` and `cxControl`. Every element arises from finitely many applications of these rules, so properties are proved by induction over them.

**Lean 4 source** [QLambda/Linear/StagedValue.lean](#)

```

inductive StagedValue (q c : Nat) where
| unit
| bitLit : Bool -> StagedValue q c
| bitRef : Fin c -> StagedValue q c
| qubit : Fin q -> StagedValue q c
| pair : StagedValue q c -> StagedValue q c -> StagedValue q c
| closure : Mode -> Ty -> Ty -> Term ->
  List (StagedValue q c) -> List (StagedValue q c) -> StagedValue q c
| prim : Prim -> StagedValue q c
| cxControl : Fin q -> StagedValue q c

```

### 6.2.58 Definition of the type of staged values

**Definition.** The type is a function of type  $\text{StagedValue } q \ c \rightarrow \text{Ty}$ .

**Construction.** Defined by cases on the input:  $\text{.unit} \mapsto \text{the unit}$ ;  $\text{.bitLit } \_ \mid \text{.bitRef } \_ \mapsto \text{the bit}$ ;  $\text{.qubit } \_ \mapsto \text{the qubit}$ ;  $\text{.pair } V \ W \mapsto \text{the tensor product of the type of } V \text{ and the type of } W$ ;  $\text{.closure } \kappa \ A \ B \ \_ \ \_ \ \_ \mapsto \text{the function type of } \kappa, A, B$ ;  $\text{.prim } p \mapsto \text{the primitive type of } p$ ;  $\text{.cxControl } \_ \mapsto \text{the function type of a linear, a qubit, the tensor product of a qubit and a qubit}$ .

#### Lean 4 source `QLambda/Linear/StagedValue.lean`

```

def ty {q c : Nat} : StagedValue q c -> Ty
| .unit => .unit
| .bitLit _ | .bitRef _ => .bit
| .qubit _ => .qubit
| .pair V W => .tensor V.ty W.ty
| .closure ? A B _ _ _ => .arrow ? A B
| .prim p => primTy p
| .cxControl _ => .arrow .lin .qubit (.tensor .qubit .qubit)

```

### 6.2.59 Every wire/slot in a first-order result was allocated by the final file

**Definition.** Every wire/slot in a first-order result was allocated by the final file.

**Construction.** Defined by cases on the input:  $\text{.unit} \mid \text{.bitLit } \_ \mapsto \text{True}$ ;  $\text{.bitRef } b \mapsto \rho.\text{AllocatedC } b$ ;  $\text{.qubit } w \mapsto \rho.\text{AllocatedQ } w$ ;  $\text{.pair } V \ W \mapsto V.\text{Respects } \rho \wedge W.\text{Respects } \rho$ ;  $\text{.closure } \_ \ \_ \ \_ \ \_ \ \_ \mid \text{.prim } \_ \mid \text{.cxControl } \_ \mapsto \text{False}$ .

#### Lean 4 source `QLambda/Linear/StagedValue.lean`

```

def Respects {q c : Nat} (? : RegFile q c) : StagedValue q c -> Prop
| .unit | .bitLit _ => True
| .bitRef b => ?.AllocatedC b
| .qubit w => ?.AllocatedQ w
| .pair V W => V.Respects ? /\ W.Respects ?
| .closure _ _ _ _ _ _ | .prim _ | .cxControl _ => False

```

### 6.2.60 Definition of the respects Boolean of staged values

**Definition.** The respects Boolean of  $\rho$  is a function of type  $\text{StagedValue } q \ c \rightarrow \text{Bool}$ .

Lean 4 source `QLambda/Linear/StagedValue.lean`

### 6.2.61 Definition of the same of staged values

Lean 4 source `QLambda/Linear/StagedValue.lean`

### 6.2.62 Soundness of the respects Boolean

Lean 4 source `QLambda/Linear/StagedValue.lean`

1351

```

    simp only [respectsB, Bool.and_eq_true] at h
    exact <respectsB_sound h.1, respectsB_sound h.2>
| closure ? A B M us ls => simp [respectsB] at h
| prim p => simp [respectsB] at h
| cxControl w => simp [respectsB] at h

```

## 7 Circuit Reflection and Completeness

`QLambda/Linear/Circuit.lean` translates between the circuit normal form and the supported Composer block fragment. Compilation preserves ideal CQ denotation. Reflection is total on a proof-carrying supported block, and compilation after reflection returns the original block.

A canonical lambda quotation uses unrestricted binders for classical slots and linear binders for wires. `QuotationGeneral.lean` covers two qubits and one classical bit, including distinct-wire *CX*, measurement, reset/reuse, store, sequencing, and conditionals. It excludes the unsupported coin command by an explicit `Quotable` predicate.

The checked circuit-level declarations have the following meanings:


- `denote_compile`: the quotation meaning, defined from the represented command, equals that command's CQ denotation;
- `denote_reflect`: command reflection preserves the same inherited CQ denotation;
- `compile_reflect`: compiling a canonical representative returns the canonical circuit;
- `Quotation.quotation_capstone`: every `Quotable` command has a well-typed canonical lambda representative whose compilation is the original command and whose inherited CQ denotation equals the circuit denotation;
- `QLambda.Palomar.quotation_capstone`: the Comparator theorem. Its statement is the typing conjunct and the compile-reflection conjunct of the library theorem above. Ideal CQ equality stays on `Quotation.quotation_capstone`, which is kernel-checked in `QuotationGeneral.lean` and left unselected so the Mathlib-only Challenge does not have to restate `Composer.Model`.

These results give circuit-level completeness for the declared two-wire `Quotable` surface. At the fragment level, closed quotations in the covering set identify `FragCert.denote` with ideal `CQ.Sem` via `interpretQuoteSpine / interpretQuoteSpineExt`, and successful elaboration reuses `elaborates_compile_agreement` together with quote-normal-form transport. A general extract of `CQ.Sem` from an arbitrary quotation `Hom`, and dedicated spines for every remaining `Quotable` constructor, remain open; so does a full-language source-level `denote_compile` theorem beyond the fragment packaging.


### 7.1 Theorem dependence

packages typing, compile reflection, and inherited CQ equality. The compared theorem `QLambda.Palomar.quotation_capstone` packages typing and compile reflection. The  $\text{Hom} \Rightarrow \text{CQ}$  covering-set spines are separate library results.



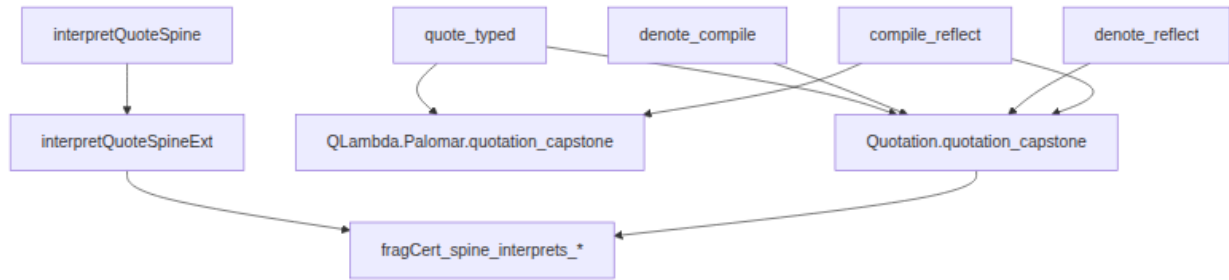

**Figure 12:** Section 7 theorem dependence. `Quotation.quotation_capstone`

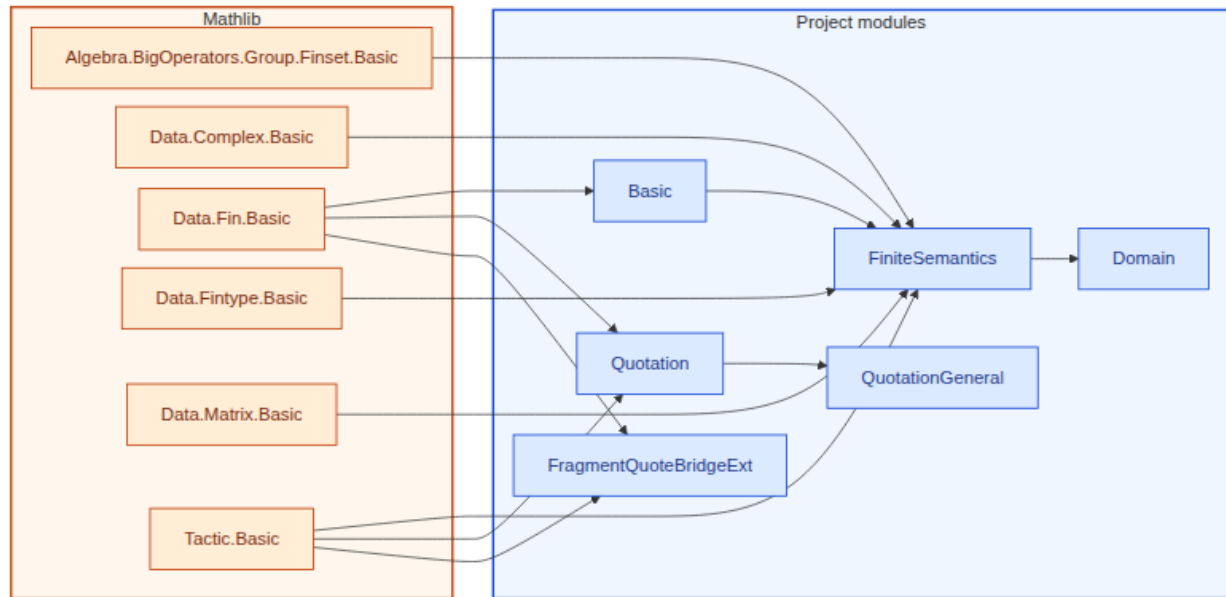

**Figure 13:** Lean module dependencies for §7 (quotation and completeness). Amber box: Mathlib imports (6 listed). Blue box: project modules (6).

## 7.2 Blueprint declarations — Circuit reflection, quotation, and completeness

*Auto-generated from the Lean sources (142 declarations). Each card states the result in mathematical English and explains the idea of its proof or construction; the Lean source follows each card.*

### 7.2.1 Hilbert-space dimension of a register containing $q$ qubits

**Definition.** Hilbert-space dimension of a register containing  $q$  qubits.

**Construction.** Defined to be  $2^q$ .

**Lean 4 source** `QLambda/CQ/Basic.lean`

```
abbrev QDim (q : Nat) : Nat := 2 ^ q
```

### 7.2.2 A fixed finite classical bit store

**Definition.** A fixed finite classical bit store.

**Construction.** Defined to be the finite index of  $c \rightarrow \text{Bool}$ .

**Lean 4 source** `QLambda/CQ/Basic.lean`

```
abbrev CStore (c : Nat) := Fin c -> Bool
```

### 7.2.3 Ideal classical–quantum meaning of a circuit

**Definition.** Ideal classical–quantum meaning of a circuit. Given an initial classical store, it returns a finite quantum instrument whose classical outcomes are final stores. The quantum register is threaded by the instrument and cannot be copied by copying a source-level handle.

**Construction.** Defined to be  $\text{CStore } c \rightarrow \text{FiniteInstrumentComp } (\text{QDim } q) (\text{CStore } c)$ .

**Lean 4 source** `QLambda/CQ/Domain.lean`

```
abbrev Sem (q c : Nat) :=  
  CStore c -> FiniteInstrumentComp (QDim q) (CStore c)
```

### 7.2.4 Strong observational equality of finite computations

**Definition.** Strong observational equality of finite computations. It quantifies over all Kraus-valued post-conditions. This presentation- independent equality is a congruence for bind even when the classical store does not carry a semantic monotonicity invariant.

**Construction.** Defined by an explicit formula built from the Kraus family and the semantic equality.

**Lean 4 source** `QLambda/CQ/Domain.lean`

```
def CompEq {n : Nat} {D : Type*} [Preorder D]  
  (? ? : FiniteInstrumentComp n D) : Prop :=  
  forall P : D -> KrausFamily n n,  
    KrausFamily.SemEq (?.wpKraus P) (?.wpKraus P)
```

### 7.2.5 Observational equality is reflexive

**Statement.** For a natural number  $n$ , a finite instrument computation  $\mu$ :  $\mu$  and  $\mu$  are observationally equal.

**Proof.** Given the data, the conclusion is produced directly from the reflexivity of the application semantic equality.

**Lean 4 source** `QLambda/CQ/Domain.lean`

```
theorem CompEq.refl {n : Nat} {D : Type*} [Preorder D]
  (? : FiniteInstrumentComp n D) : CompEq ? ? :=
  fun _ => KrausFamily.applySemEq_refl _
```

### 7.2.6 Observational equality is symmetric

**Statement.** For a natural number  $n$ , finite instrument computations  $\mu, \nu$ : if  $\mu$  and  $\nu$  are observationally equal, then  $\nu$  and  $\mu$  are observationally equal.

**Proof.** Given the data, the conclusion is produced directly from the symmetry of the application semantic equality.

**Lean 4 source** `QLambda/CQ/Domain.lean`

```
theorem CompEq.symm {n : Nat} {D : Type*} [Preorder D]
  {? ? : FiniteInstrumentComp n D} (h : CompEq ? ?) : CompEq ? ? :=
  fun P => KrausFamily.applySemEq_symm (h P)
```

### 7.2.7 Observational equality is transitive

**Statement.** For a natural number  $n$ , finite instrument computations  $\mu, \nu, \xi$ : if  $\mu$  and  $\nu$  are observationally equal and  $\nu$  and  $\xi$  are observationally equal, then  $\mu$  and  $\xi$  are observationally equal.

**Proof.** Given the data, the conclusion is produced directly from the transitivity of the application semantic equality.

**Lean 4 source** `QLambda/CQ/Domain.lean`

```
theorem CompEq.trans {n : Nat} {D : Type*} [Preorder D]
  {? ? ? : FiniteInstrumentComp n D}
  (h?? : CompEq ? ?) (h?? : CompEq ? ?) : CompEq ? ? :=
  fun P => KrausFamily.applySemEq_trans (h?? P) (h?? P)
```

### 7.2.8 Functorial action for observational equalities

**Statement.** For a natural number  $n$ , finite instrument computations  $\mu, \nu$ : if  $\mu$  and  $\nu$  are observationally equal, then  $\mu.\text{map } f$  and  $\nu.\text{map } f$  are observationally equal.

**Proof.** The key step rewrites with the Kraus weakest precondition of a mapped family for finite instrument computations and the hypothesis that  $\mu$  and  $\nu$  are observationally equal.

**Lean 4 source** `QLambda/CQ/Domain.lean`

```

theorem CompEq.map {n : Nat} {D E : Type*} [Preorder D] [Preorder E]
  (f : D -> E) {? ? : FiniteInstrumentComp n D} (h : CompEq ? ?) :
  CompEq (? .map f) (? .map f) := by
  intro P
  rw [FiniteInstrumentComp.wpKraus_map, FiniteInstrumentComp.wpKraus_map]
  exact h (P comp f)

```

### 7.2.9 Pointwise strong observational equality of CQ meanings

**Definition.** Pointwise strong observational equality of CQ meanings.

**Construction.** Defined to be  $\forall s, \text{CompEq } (F \ s) \ (G \ s)$ .

**Lean 4 source** [QLambda/CQ/Domain.lean](#)

```

def Eq {q c : Nat} (F G : Sem q c) : Prop :=
  forall s, CompEq (F s) (G s)

```

### 7.2.10 The identity circuit

**Definition.** The identity circuit.

**Construction.** The map sending  $s$  to the unit of  $s$ .

**Lean 4 source** [QLambda/CQ/Domain.lean](#)

```

def skip {q c : Nat} : Sem q c :=
  fun s => FiniteInstrumentComp.unit s

```

### 7.2.11 Sequential composition, implemented by instrument bind

**Definition.** Sequential composition, implemented by instrument bind.

**Construction.** The map sending  $s$  to  $(F \ s) . \text{bind } G$ .

**Lean 4 source** [QLambda/CQ/Domain.lean](#)

```

def seq {q c : Nat} (F G : Sem q c) : Sem q c :=
  fun s => (F s) .bind G

```

### 7.2.12 Ideal external classical selection

**Definition.** Ideal external classical selection.

**Construction.** The map sending  $s$  to  $\text{if guard } s \text{ then } G \ s \text{ else } F \ s$ .

**Lean 4 source** [QLambda/CQ/Domain.lean](#)

```

def select {q c : Nat} (guard : CStore c -> Bool) (F G : Sem q c) : Sem q c :=
  fun s => if guard s then G s else F s

```

### 7.2.13 Reflexivity for semantic equalities of circuits

**Statement.** For natural numbers  $q, c$ :  $\text{Eq } F \ F$ . Formally:  $\text{Eq } F \ F$ .

**Proof.** It follows from the reflexivity of the application semantic equality.

**Lean 4 source** `QLambda/CQ/Domain.lean`

```
theorem Eq.refl {q c : Nat} (F : Sem q c) : Eq F F := by
  intro s P
  exact KrausFamily.applySemEq_refl _
```

### 7.2.14 Symmetry for semantic equalities of circuits

**Statement.** For natural numbers  $q, c$ : if  $\text{Eq } F \ G$ , then  $\text{Eq } G \ F$ . Formally:  $\text{Eq } G \ F$ .

**Proof.** It follows from the symmetry of the application semantic equality.

**Lean 4 source** `QLambda/CQ/Domain.lean`

```
theorem Eq.symm {q c : Nat} {F G : Sem q c} (h : Eq F G) : Eq G F := by
  intro s P
  exact KrausFamily.applySemEq_symm (h s P)
```

### 7.2.15 Transitivity for semantic equalities of circuits

**Statement.** For natural numbers  $q, c$ : if  $\text{Eq } F \ G$  and  $\text{Eq } G \ H$ , then  $\text{Eq } F \ H$ .

**Proof.** It follows from the transitivity of the application semantic equality.

**Lean 4 source** `QLambda/CQ/Domain.lean`

```
theorem Eq.trans {q c : Nat} {F G H : Sem q c}
  (hFG : Eq F G) (hGH : Eq G H) : Eq F H := by
  intro s P
  exact KrausFamily.applySemEq_trans (hFG s P) (hGH s P)
```

### 7.2.16 Skip of the sequential composition

**Statement.** For natural numbers  $q, c$ :  $\text{Eq } (\text{seq skip } F) \ F$ . Formally:  $\text{Eq } (\text{seq skip } F) \ F$ .

**Proof.** It follows from the transitivity of the application semantic equality.

**Lean 4 source** `QLambda/CQ/Domain.lean`

```
theorem skip_seq {q c : Nat} (F : Sem q c) : Eq (seq skip F) F := by
  intro s P
  exact KrausFamily.applySemEq_trans
    (FiniteInstrumentComp.wpKraus_bind_semEq
      (FiniteInstrumentComp.unit (n := QDim q) s) F P)
    (FiniteInstrumentComp.wpKraus_unit_semEq s fun t => (F t).wpKraus P)
```

### 7.2.17 Sequential composition of the skip

**Statement.** For natural numbers  $q, c$ :  $\text{Eq} (\text{seq } F \text{ skip}) F$ . Formally:  $\text{Eq} (\text{seq } F \text{ skip}) F$ .

**Proof.** It follows from the transitivity of the application semantic equality.

#### Lean 4 source `QLambda/CQ/Domain.lean`

```
theorem seq_skip {q c : Nat} (F : Sem q c) : Eq (seq F skip) F := by
  intro s P
  exact KrausFamily.applySemEq_trans
    (FiniteInstrumentComp.wpKraus_bind_semEq
      (F s) (FiniteInstrumentComp.unit (n := QDim q)) P)
    (FiniteInstrumentComp.wpKraus_semEq_pred (F s) fun t =>
      FiniteInstrumentComp.wpKraus_unit_semEq t P)
```

### 7.2.18 Associativity of the sequential composition

**Statement.** For natural numbers  $q, c$ :  $\text{Eq} (\text{seq} (\text{seq } F G) H) (\text{seq } F (\text{seq } G H))$ .

**Proof.** It follows from the transitivity of the application semantic equality.

#### Lean 4 source `QLambda/CQ/Domain.lean`

```
theorem seq_assoc {q c : Nat} (F G H : Sem q c) :
  Eq (seq (seq F G) H) (seq F (seq G H)) := by
  intro s P
  exact KrausFamily.applySemEq_trans
    (FiniteInstrumentComp.wpKraus_bind_semEq ((F s).bind G) H P)
    (KrausFamily.applySemEq_trans
      (FiniteInstrumentComp.wpKraus_bind_semEq
        (F s) G fun t => (H t).wpKraus P)
      (KrausFamily.applySemEq_trans
        (FiniteInstrumentComp.wpKraus_semEq_pred (F s) fun t =>
          KrausFamily.applySemEq_symm
            (FiniteInstrumentComp.wpKraus_bind_semEq (G t) H P))
        (KrausFamily.applySemEq_symm
          (FiniteInstrumentComp.wpKraus_bind_semEq
            (F s) (fun t => (G t).bind H) P))))
```

### 7.2.19 CQ sequencing respects semantic equality in both arguments

**Statement.** CQ sequencing respects semantic equality in both arguments. Formally:  $\text{Eq} (\text{seq } F G) (\text{seq } F' G')$ .

**Proof.** It follows from the transitivity of the application semantic equality.

#### Lean 4 source `QLambda/CQ/Domain.lean`

```
theorem seq_congr {q c : Nat} {F F' G G' : Sem q c}
  (hF : Eq F F') (hG : Eq G G') :
  Eq (seq F G) (seq F' G') := by
  intro s P
  exact KrausFamily.applySemEq_trans
    (FiniteInstrumentComp.wpKraus_bind_semEq (F s) G P)
    (KrausFamily.applySemEq_trans
```

```

(hF s fun t => (G t).wpKraus P)
(KrausFamily.applySemEq_trans
  (FiniteInstrumentComp.wpKraus_semEq_pred (F' s) fun t => hG t P)
  (KrausFamily.applySemEq_symm
    (FiniteInstrumentComp.wpKraus_bind_semEq (F' s) G' P))))

```

### 7.2.20 Classical selection respects semantic equality branchwise

**Statement.** Classical selection respects semantic equality branchwise. Formally:  $\text{Eq} (\text{select guard } F \ G) (\text{select guard } F' \ G')$ .

**Proof.** The argument splits on the relevant condition. The goal is simplified using the definition of the select.

#### Lean 4 source `QLambda/CQ/Domain.lean`

```

theorem select_congr {q c : Nat} (guard : CStore c -> Bool)
  {F F' G G' : Sem q c} (hF : Eq F F') (hG : Eq G G') :
  Eq (select guard F G) (select guard F' G') := by
  intro s
  by_cases h : guard s
  * simp [select, h] using hG s
  * simp [select, h] using hF s

```

### 7.2.21 Select of true

**Statement.** For natural numbers  $q, c$ : the select of  $\text{fun } \_ \Rightarrow \text{true}$ ,  $F, G$  equals  $G$ .

**Proof.** Both sides are compared pointwise (by extensionality). The goal is simplified using the definition of the select.

#### Lean 4 source `QLambda/CQ/Domain.lean`

```

@[simp] theorem select_true {q c : Nat} (F G : Sem q c) :
  select (fun _ => true) F G = G := by
  funext s
  simp [select]

```

### 7.2.22 Select of false

**Statement.** For natural numbers  $q, c$ : the select of  $\text{fun } \_ \Rightarrow \text{false}$ ,  $F, G$  equals  $F$ .

**Proof.** Both sides are compared pointwise (by extensionality). The goal is simplified using the definition of the select.

#### Lean 4 source `QLambda/CQ/Domain.lean`

```

@[simp] theorem select_false {q c : Nat} (F G : Sem q c) :
  select (fun _ => false) F G = F := by
  funext s
  simp [select]

```

### 7.2.23 Aggregate a finite instrument against a Kraus-valued postcondition

**Definition.** Aggregate a finite instrument against a Kraus-valued postcondition.

**Construction.** Constructed interactively; it follows from standard identities for finite sums.

**Lean 4 source** [QLambda/CQ/FiniteSemantics.lean](#)

```
noncomputable def wpKraus [Preorder D] (? : FiniteInstrumentComp n D)
  (P : D -> KrausFamily n n) : KrausFamily n n := by
  classical
  exact Finset.univ.toList.flatMap fun o =>
    KrausFamily.comp (P (? .value o)) (? .branch o)
```

### 7.2.24 Action on a matrix of the Kraus weakest precondition for finite instrument computations

**Statement.** For a finite instrument computation  $\mu$ , a matrix  $\rho$ : the action of  $\mu.\text{wpKraus } P$  on  $\rho$  equals an explicit expression in the action on a matrix and the composition.

**Proof.** The key step rewrites with the action on a matrix of the flat map for Kraus families and the definition of the Kraus weakest precondition.

**Lean 4 source** [QLambda/CQ/FiniteSemantics.lean](#)

```
theorem applyMat_wpKraus [Preorder D] (? : FiniteInstrumentComp n D)
  (P : D -> KrausFamily n n) (? : Matrix (Fin n) (Fin n) ?) :
  KrausFamily.applyMat (? .wpKraus P) ? =
  ? o : ? .Outcome,
  KrausFamily.applyMat
    (KrausFamily.comp (P (? .value o)) (? .branch o)) ? := by
  classical
  unfold wpKraus
  rw [KrausFamily.applyMat_flatMap]
  simp
```

### 7.2.25 The Kraus weakest precondition respects outcome of the equivalence

**Statement.** For finite instrument computations  $\mu, \nu$ : if for every  $o, \nu.\text{branch } (e \ o) = \mu.\text{branch } o$  and for every  $o, \nu.\text{value } (e \ o) = \mu.\text{value } o$ , then  $\mu.\text{wpKraus } P$  and  $\nu.\text{wpKraus } P$  have the same semantics.

**Proof.** The key step rewrites with the action on a matrix of the Kraus weakest precondition for finite instrument computations, the hypothesis that for every  $o, \nu.\text{branch } (e \ o) = \mu.\text{branch } o$ , the hypothesis that for every  $o, \nu.\text{value } (e \ o) = \mu.\text{value } o$  and standard identities for finite types.

**Lean 4 source** [QLambda/CQ/FiniteSemantics.lean](#)

```
theorem wpKraus_congr_of_outcome_equiv [Preorder D]
  (? ? : FiniteInstrumentComp n D)
  (e : ? .Outcome ? .Outcome)
  (hbranch : forall o, ? .branch (e o) = ? .branch o)
  (hvalue : forall o, ? .value (e o) = ? .value o)
  (P : D -> KrausFamily n n) :
  KrausFamily.SemEq (? .wpKraus P) (? .wpKraus P) := by
```



```

intro ?
rw [applyMat_wpKraus, applyMat_wpKraus]
refine Fintype.sum_equiv e
  (fun o => KrausFamily.applyMat
    (KrausFamily.comp (P (? .value o)) (? .branch o)) ?)
  (fun q => KrausFamily.applyMat
    (KrausFamily.comp (P (? .value q)) (? .branch q)) ?)
  ?_
intro o
rw [hbranch o, hvalue o]

```

### 7.2.26 Kraus weakest precondition of the unit of the semantic equality for finite instrument computations

**Statement.**  $(\text{unit } (n := n) \ d) . \text{wpKraus } P$  and  $P \ d$  have the same semantics.

**Proof.** The key step rewrites with the action on a matrix of the Kraus weakest precondition for finite instrument computations.

**Lean 4 source** [QLambda/CQ/FiniteSemantics.lean](#)

```

theorem wpKraus_unit_semEq [Preorder D] (d : D)
  (P : D -> KrausFamily n n) :
  KrausFamily.SemEq ((unit (n := n) d) .wpKraus P) (P d) := by
intro ?
rw [applyMat_wpKraus]
change (? _ : Unit,
  KrausFamily.applyMat
    (KrausFamily.comp (P d) (KrausFamily.identity n)) ?) =
  KrausFamily.applyMat (P d) ?
simp

```

### 7.2.27 Kraus weakest precondition of the map of an operation of the semantic equality for finite instrument computations

**Statement.**  $(\text{ofOperation } \Phi \ d) . \text{wpKraus } P$  and  $\text{KrausFamily.comp } (P \ d) \ \Phi . \text{kraus}$  have the same semantics.

**Proof.** The key step rewrites with the action on a matrix of the Kraus weakest precondition for finite instrument computations.

**Lean 4 source** [QLambda/CQ/FiniteSemantics.lean](#)

```

theorem wpKraus_ofOperation_semEq [Preorder D]
  (? : QuantumOperation n n) (d : D)
  (P : D -> KrausFamily n n) :
  KrausFamily.SemEq
    ((ofOperation ? d) .wpKraus P)
    (KrausFamily.comp (P d) ? .kraus) := by
intro ?
rw [applyMat_wpKraus]
change
  (? _ : Unit,
    KrausFamily.applyMat

```

```

      (KrausFamily.comp (P d) ?.kraus) ?) =
KrausFamily.applyMat
      (KrausFamily.comp (P d) ?.kraus) ?
simp

```

### 7.2.28 Kraus weakest precondition of the sequential composition of the semantic equality for finite instrument computations

**Statement.** For a finite instrument computation  $\mu$ :  $(\mu.\text{bind } f).\text{wpKraus } P$  and  $\mu.\text{wpKraus } \text{fun } d \Rightarrow (f d).\text{wpKraus } P$  have the same semantics.

**Proof.** The key step rewrites with the action on a matrix of the Kraus weakest precondition for finite instrument computations, standard identities for finite types, the action on a matrix of a composition and the sum of a congruence.

**Lean 4 source** [QLambda/CQ/FiniteSemantics.lean](#)

```

theorem wpKraus_bind_semEq [Preorder D] [Preorder E]
  (? : FiniteInstrumentComp n D) (f : D -> FiniteInstrumentComp n E)
  (P : E -> KrausFamily n n) :
  KrausFamily.SemEq ((?.bind f).wpKraus P)
    (?.wpKraus fun d => (f d).wpKraus P) := by
intro ?
rw [applyMat_wpKraus, applyMat_wpKraus]
change
  (? p : Sigma o : ?.Outcome, (f (?.value o)).Outcome,
    KrausFamily.applyMat
      (KrausFamily.comp
        (P ((f (?.value p.1)).value p.2))
        (KrausFamily.comp
          ((f (?.value p.1)).branch p.2)
          (?.branch p.1))) ?) =
  ? o : ?.Outcome,
    KrausFamily.applyMat
      (KrausFamily.comp ((f (?.value o)).wpKraus P) (?.branch o)) ?
rw [Fintype.sum_sigma]
apply Finset.sum_congr rfl
intro o _
rw [KrausFamily.applyMat_comp, applyMat_wpKraus]
simp only [KrausFamily.applyMat_comp]

```

### 7.2.29 The sequential composition of the Kraus weakest precondition respects outcome of the equivalence

**Statement.** For finite instrument computations  $\mu, \nu$ : if for every  $o$ ,  $\nu.\text{branch } (e o) = \mu.\text{branch } o$  and for every  $o$ ,  $\nu.\text{value } (e o) = \mu.\text{value } o$ , then  $(\mu.\text{bind } \xi).\text{wpKraus } P$  and  $(\nu.\text{bind } \xi).\text{wpKraus } P$  have the same semantics.

**Proof.** The claim follows from a chain of equalities (or inequalities).

**Lean 4 source** [QLambda/CQ/FiniteSemantics.lean](#)

```

theorem bind_wpKraus_congr_of_outcome_equiv [Preorder D] [Preorder E]
  (? ? : FiniteInstrumentComp n D)
  (e : ?.Outcome ? ?.Outcome)
  (hbranch : forall o, ?.branch (e o) = ?.branch o)
  (hvalue : forall o, ?.value (e o) = ?.value o)
  (? : D -> FiniteInstrumentComp n E)
  (P : E -> KrausFamily n n) :
  KrausFamily.SemEq ((?.bind ?).wpKraus P) ((?.bind ?).wpKraus P) := by
intro ?
calc
  KrausFamily.applyMat ((?.bind ?).wpKraus P) ? =
    KrausFamily.applyMat (?.wpKraus fun d => (? d).wpKraus P) ? :=
    wpKraus_bind_semEq ? ? P ?
_ = KrausFamily.applyMat (?.wpKraus fun d => (? d).wpKraus P) ? :=
    wpKraus_congr_of_outcome_equiv ? ? e hbranch hvalue
    (fun d => (? d).wpKraus P) ?
_ = KrausFamily.applyMat ((?.bind ?).wpKraus P) ? :=
    (wpKraus_bind_semEq ? ? P ?).symm

```

### 7.2.30 Kraus weakest precondition of the semantic equality of the predecessor for finite instrument computations

**Statement.** For a finite instrument computation  $\mu$ : if for every  $d, P \ d$  and  $Q \ d$  have the same semantics, then  $\mu.\text{wpKraus } P$  and  $\mu.\text{wpKraus } Q$  have the same semantics.

**Proof.** The key step rewrites with the action on a matrix of the Kraus weakest precondition for finite instrument computations, the action on a matrix of a composition, the sum of a congruence and the hypothesis that for every  $d, P \ d$  and  $Q \ d$  have the same semantics.

#### Lean 4 source `QLambda/CQ/FiniteSemantics.lean`

```

theorem wpKraus_semEq_pred [Preorder D] (? : FiniteInstrumentComp n D)
  {P Q : D -> KrausFamily n n}
  (hPQ : forall d, KrausFamily.SemEq (P d) (Q d)) :
  KrausFamily.SemEq (?.wpKraus P) (?.wpKraus Q) := by
intro ?
rw [applyMat_wpKraus, applyMat_wpKraus]
apply Finset.sum_congr rfl
intro o _
simp only [KrausFamily.applyMat_comp]
exact hPQ (?.value o) (KrausFamily.applyMat (?.branch o) ?)

```

### 7.2.31 Kraus weakest precondition of a mapped family for finite instrument computations

**Statement.** For a finite instrument computation  $\mu$ :  $(\mu.\text{map } f).\text{wpKraus } P = \mu.\text{wpKraus } (P \circ f)$ .

**Proof.** By definition. Unfolding the Kraus weakest precondition turns the left-hand side,  $(\mu.\text{map } f).\text{wpKraus } P$ , into the right-hand side,  $\mu.\text{wpKraus } (P \circ f)$ ; the two sides are the same term.

#### Lean 4 source `QLambda/CQ/FiniteSemantics.lean`

```

theorem wpKraus_map [Preorder D] [Preorder E]

```

```

(f : D -> E) (? : FiniteInstrumentComp n D) (P : E -> KrausFamily n n) :
  (? .map f).wpKraus P = ? .wpKraus (P comp f) := by
rfl

```

### 7.2.32 Definition of the fragment certificate of the T gate of the quotation

**Definition.** Hand-built closed `FragCert` for `(Command.t w).quote`.

**Construction.** Defined by an explicit formula built from the empty list, the fragment bit admissibility, the fragment bit duplicability and the empty usage mask.

**Lean 4 source** [QLambda/Linear/FragmentQuoteBridgeExt.lean](#)

```

noncomputable def fragCert_t_quote (w : Fin 1) :
  FragCert.Closed (Command.t w).quote Command.quotationTy :=
  .lamU CtxUAllBit.nil CtxLAllSomeFragment.nil fragment_bit_admissible
  fragment_bit_duplicable (by simp [AllNone]) quotationTy_semanticFragment
  (fragCert_gate_lamL .t rfl)

```

### 7.2.33 Definition of the fragment certificate of the reset of the quotation

**Definition.** Hand-built closed `FragCert` for `(Command.reset qbit).quote`.

**Construction.** Defined by an explicit formula built from the empty list, the fragment bit admissibility, the fragment bit duplicability and the empty usage mask.

**Lean 4 source** [QLambda/Linear/FragmentQuoteBridgeExt.lean](#)

```

noncomputable def fragCert_reset_quote (qbit : Fin 1) :
  FragCert.Closed (Command.reset qbit).quote Command.quotationTy :=
  .lamU CtxUAllBit.nil CtxLAllSomeFragment.nil fragment_bit_admissible
  fragment_bit_duplicable (by simp [AllNone]) quotationTy_semanticFragment
  (fragCert_gate_lamL .reset rfl)

```

### 7.2.34 Denotation of the fragment certificate of the T gate of the quotation

**Statement.** For an index  $w$ : the denotation of the fragment certificate  $t$  quotation of  $w$  equals the quoted gate spine of the T gate and `rfl`.

**Proof.** By definition. Unfolding the denotation turns the left-hand side, the denotation of the fragment certificate  $t$  quotation of  $w$ , into the right-hand side, the quoted gate spine of the T gate and `rfl`; the two sides are the same term.

**Lean 4 source** [QLambda/Linear/FragmentQuoteBridgeExt.lean](#)

```

theorem fragCert_t_quote_denote (w : Fin 1) :
  FragCert.denote (fragCert_t_quote w) = quoteGateSpine .t rfl :=
rfl

```

### 7.2.35 Denotation of the fragment certificate of the reset of the quotation

**Statement.** For an index `qbit`: the denotation of the fragment certificate reset quotation of `qbit` equals the quoted gate spine of reset and `rfl`.

**Proof.** By definition. Unfolding the denotation turns the left-hand side, the denotation of the fragment certificate reset quotation of `qbit`, into the right-hand side, the quoted gate spine of reset and `rfl`; the two sides are the same term.

**Lean 4 source** `QLambda/Linear/FragmentQuoteBridgeExt.lean`

```
theorem fragCert_reset_quote_denote (qbit : Fin 1) :  
  FragCert.denote (fragCert_reset_quote qbit) = quoteGateSpine .reset rfl :=  
  rfl
```

### 7.2.36 The circuit command of the T gate of the denotation equals a gate block

**Statement.** For an index `w`: `(Command.t w).denote model` equals the denotation of a block of `model` and `[.gate (.t w)]`.

**Proof.** By definition. Unfolding the denotation turns the left-hand side, `(Command.t w).denote model`, into the right-hand side, the denotation of a block of `model` and `[.gate (.t w)]`; the two sides are the same term.

**Lean 4 source** `QLambda/Linear/FragmentQuoteBridgeExt.lean`

```
theorem command_t_denote_eq_gateBlock (model : Composer.Model 1 1)  
  (w : Fin 1) :  
  (Command.t w).denote model =  
    Composer.denoteBlock model [.gate (.t w)] :=  
  rfl
```

### 7.2.37 The circuit command of the reset of the denotation equals a reset block

**Statement.** For an index `qbit`: `(Command.reset qbit).denote model` equals the denotation of a block of `model` and `[.reset qbit]`.

**Proof.** By definition. Unfolding the denotation turns the left-hand side, `(Command.reset qbit).denote model`, into the right-hand side, the denotation of a block of `model` and `[.reset qbit]`; the two sides are the same term.

**Lean 4 source** `QLambda/Linear/FragmentQuoteBridgeExt.lean`

```
theorem command_reset_denote_eq_resetBlock (model : Composer.Model 1 1)  
  (qbit : Fin 1) :  
  (Command.reset qbit).denote model =  
    Composer.denoteBlock model [.reset qbit] :=  
  rfl  
  
/--! ## Measure quotation spine -/
```

### 7.2.38 Closed certificate for a measure quotation (choice from nonempty package)

**Definition.** Closed certificate for a measure quotation (choice from nonempty package).

**Construction.** Defined to be the choice of the fragment quotation has fragment certificate of a measurement.

**Lean 4 source** `QLambda/Linear/FragmentQuoteBridgeExt.lean`

```
noncomputable def fragCert_measure_quote (qbit cbit : Fin 1) :  
  FragCert.Closed (Command.measure qbit cbit).quote Command.quotationTy :=  
  Classical.choice (fragment_quote_has_fragCert .measure)
```

### 7.2.39 Hom spine of the canonical measure quotation at wire/bit 0

**Definition.** Hom spine of the canonical measure quotation at wire/bit 0.

**Construction.** Defined to be the denotation of the fragment certificate measurement quotation at 0, 0.

**Lean 4 source** `QLambda/Linear/FragmentQuoteBridgeExt.lean`

```
noncomputable def quoteMeasureSpine :  
  Hom (FragmentContext.combined [] [])  
    (fragmentModule Command.quotationTy) :=  
  FragCert.denote (fragCert_measure_quote (0 : Fin 1) (0 : Fin 1))
```

### 7.2.40 Denotation of the fragment certificate of the measurement of the quotation

**Statement.** For indexes `qbit, cbit`: the denotation of the fragment certificate measurement quotation of `qbit` and `cbit` equals the quotation measurement spine.

**Proof.** An equation between variables is used to substitute one for the other.

**Lean 4 source** `QLambda/Linear/FragmentQuoteBridgeExt.lean`

```
theorem fragCert_measure_quote_denote (qbit cbit : Fin 1) :  
  FragCert.denote (fragCert_measure_quote qbit cbit) = quoteMeasureSpine := by  
  have hq : qbit = (0 : Fin 1) := Fin.eq_zero qbit  
  have hc : cbit = (0 : Fin 1) := Fin.eq_zero cbit  
  subst hq; subst hc  
  rfl
```

### 7.2.41 The circuit command of the measurement of the denotation equals a measurement block

**Statement.** For indexes `qbit, cbit`: `(Command.measure qbit cbit).denote model` equals the denotation of a block of `model` and `[.measure qbit cbit]`.

**Proof.** By definition. Unfolding the denotation turns the left-hand side, `(Command.measure qbit cbit).denote model`, into the right-hand side, the denotation of a block of `model` and `[.measure qbit cbit]`; the two sides are the same term.

**Lean 4 source** `QLambda/Linear/FragmentQuoteBridgeExt.lean`

```

theorem command_measure_denote_eq_measureBlock (model : Composer.Model 1 1)
  (qbit cbit : Fin 1) :
  (Command.measure qbit cbit).denote model =
    Composer.denoteBlock model [.measure qbit cbit] :=
  rfl

/-! ## `seq skip skip` collapses to skip -/

```

### 7.2.42 seq skip collapses to skip

**Statement.** `## seq skip skip` collapses to `skip`. Formally:  $(\text{Command.seq } .\text{skip } .\text{skip}).\text{quote} = \text{Command.skip.quote}$ .

**Proof.** By definition. Unfolding the quotation turns the left-hand side,  $(\text{Command.seq } .\text{skip } .\text{skip}).\text{quote}$ , into the right-hand side, the quotation; the two sides are the same term.

**Lean 4 source** [QLambda/Linear/FragmentQuoteBridgeExt.lean](#)

```

theorem quote_seq_skip_skip :
  (Command.seq .skip .skip).quote = Command.skip.quote :=
  rfl

```

### 7.2.43 The quotation sequential composition skip denotation

**Statement.** The denotation of `c` equals the quoted skip spine. Formally:  $\text{FragCert.denote } c = \text{quoteSkipSpine}$ .

**Proof.** The goal is simplified using the `seq skip` collapses to `skip`.

**Lean 4 source** [QLambda/Linear/FragmentQuoteBridgeExt.lean](#)

```

theorem quote_seq_skip_skip_denote
  (c : FragCert.Closed (Command.seq .skip .skip).quote Command.quotationTy) :
  FragCert.denote c = quoteSkipSpine := by
  simpa [quote_seq_skip_skip] using fragCert_skip_quote_denote_independent
  (quote_seq_skip_skip |> c)

/-! ## Extended spine witness -/

```

### 7.2.44 Extended witness covering skip/x/h plus t/reset/measure and seq-skip

**Definition.** Extended witness covering `skip/x/h` plus `t/reset/measure` and `seq-skip`.

**Construction.** Generated by the rules `core`, `gateT`, `gateReset`, `measure` and `seqSkipSkip`. Every element arises from finitely many applications of these rules, so properties are proved by induction over them.

**Lean 4 source** [QLambda/Linear/FragmentQuoteBridgeExt.lean](#)

```

inductive QuoteSpineWitnessExt (? : Hom (FragmentContext.combined [] []))
  (fragmentModule Command.quotationTy) : Type where
| core : QuoteSpineWitness ? -> QuoteSpineWitnessExt ?
| gateT (h : ? = quoteGateSpine .t rfl)

```

```

| gateReset (h : ? = quoteGateSpine .reset rfl)
| measure (h : ? = quoteMeasureSpine)
| seqSkipSkip (h : ? = quoteSkipSpine)

```

### 7.2.45 Spine-driven CQ interpret for the extended witness set

**Definition.** Spine-driven CQ interpret for the extended witness set.

**Construction.** Defined by cases on the input:  $\text{.core } w \mapsto$  the interpretation of a quoted spine of model and  $w$ ;  $\text{.gateT } _ \mapsto$  the denotation of a block of model and  $[\text{.gate } (.t \ 0)]$ ;  $\text{.gateReset } _ \mapsto$  the denotation of a block of model and  $[\text{.reset } 0]$ ;  $\text{.measure } _ \mapsto$  the denotation of a block of model and  $[\text{.measure } 0 \ 0]$ ;  $\text{.seqSkipSkip } _ \mapsto$  skip.

**Lean 4 source** [QLambda/Linear/FragmentQuoteBridgeExt.lean](#)

```

noncomputable def interpretQuoteSpineExt (model : Composer.Model 1 1)
  {? : Hom (FragmentContext.combined [] [])
    (fragmentModule Command.quotationTy)} :
  QuoteSpineWitnessExt ? -> CQ.Sem 1 1
| .core w => interpretQuoteSpine model w
| .gateT _ => Composer.denoteBlock model [.gate (.t (0 : Fin 1))]
| .gateReset _ => Composer.denoteBlock model [.reset (0 : Fin 1)]
| .measure _ => Composer.denoteBlock model [.measure (0 : Fin 1) (0 : Fin 1)]
| .seqSkipSkip _ => CQ.skip

```

### 7.2.46 Quotation of the interpretation of the T gate

**Statement.** For a term  $t$ , an index  $w$ : if  $\text{FragCert.denote } c = \text{quoteGateSpine } .t \text{ rfl}$ , then the interpretation quotation spine extensionality of model and the gate  $t$  of  $hc$  equals an explicit expression in the denotation of a block and the interpretation quotation spine extensionality.

**Proof.** Each component of the claim is established separately. An equation between variables is used to substitute one for the other.

**Lean 4 source** [QLambda/Linear/FragmentQuoteBridgeExt.lean](#)

```

theorem interpret_t_quote {t : Term} (model : Composer.Model 1 1) (w : Fin 1)
  (c : FragCert.Closed t Command.quotationTy)
  (hc : FragCert.denote c = quoteGateSpine .t rfl) :
  interpretQuoteSpineExt model (.gateT hc) =
    Composer.denoteBlock model [.gate (.t w)] /\
    interpretQuoteSpineExt model (.gateT hc) = (Command.t w).denote model := by
  have hw := Fin.eq_zero w
  subst hw
  exact <rfl, (command_t_denote_eq_gateBlock model (0 : Fin 1)).symm>

```

### 7.2.47 Quotation of the interpretation of the reset

**Statement.** For a term  $t$ , an index  $qbit$ : if  $\text{FragCert.denote } c = \text{quoteGateSpine } .reset \text{ rfl}$ , then the interpretation quotation spine extensionality of model and the gate reset of  $hc$  equals an



explicit expression in the denotation of a block, the interpretation quotation spine extensionality and the reset.

**Proof.** Each component of the claim is established separately. An equation between variables is used to substitute one for the other.

#### Lean 4 source `QLambda/Linear/FragmentQuoteBridgeExt.lean`

```
theorem interpret_reset_quote {t : Term} (model : Composer.Model 1 1)
  (qbit : Fin 1) (c : FragCert.Closed t Command.quotationTy)
  (hc : FragCert.denote c = quoteGateSpine .reset rfl) :
  interpretQuoteSpineExt model (.gateReset hc) =
    Composer.denoteBlock model [.reset qbit] /\
  interpretQuoteSpineExt model (.gateReset hc) =
    (Command.reset qbit).denote model := by
  have hq := Fin.eq_zero qbit
  subst hq
  exact <rfl, (command_reset_denote_eq_resetBlock model (0 : Fin 1)).symm>
```

### 7.2.48 Quotation of the interpretation of the measurement

**Statement.** For a term  $t$ , indexes  $qbit, cbit$ : if  $\text{FragCert.denote } c = \text{quoteMeasureSpine}$ , then the interpretation quotation spine extensionality of  $\text{model}$  and the measurement of wire  $hc$  equals an explicit expression in the denotation of a block, the interpretation quotation spine extensionality and the measurement.

**Proof.** Each component of the claim is established separately. An equation between variables is used to substitute one for the other.

#### Lean 4 source `QLambda/Linear/FragmentQuoteBridgeExt.lean`

```
theorem interpret_measure_quote {t : Term} (model : Composer.Model 1 1)
  (qbit cbit : Fin 1) (c : FragCert.Closed t Command.quotationTy)
  (hc : FragCert.denote c = quoteMeasureSpine) :
  interpretQuoteSpineExt model (.measure hc) =
    Composer.denoteBlock model [.measure qbit cbit] /\
  interpretQuoteSpineExt model (.measure hc) =
    (Command.measure qbit cbit).denote model := by
  have hq := Fin.eq_zero qbit
  have hcbit := Fin.eq_zero cbit
  subst hq; subst hcbit
  exact <rfl, (command_measure_denote_eq_measureBlock model (0 : Fin 1)
    (0 : Fin 1)).symm>
```

### 7.2.49 Quotation of the interpretation of the sequential composition of the skip of the skip

**Statement.** For a term  $t$ : if  $\text{FragCert.denote } c = \text{quoteSkipSpine}$ , then the interpretation quotation spine extensionality of  $\text{model}$  and the sequential composition skip of  $hc$  equals an explicit expression in the skip, the interpretation quotation spine extensionality and the sequential composition.

**Proof.** Each component of the claim is established separately.

#### Lean 4 source `QLambda/Linear/FragmentQuoteBridgeExt.lean`

```

theorem interpret_seq_skip_skip_quote {t : Term} (model : Composer.Model 1 1)
  (c : FragCert.Closed t Command.quotationTy)
  (hc : FragCert.denote c = quoteSkipSpine) :
  interpretQuoteSpineExt model (.seqSkipSkip hc) = CQ.skip /\
  interpretQuoteSpineExt model (.seqSkipSkip hc) =
    (Command.seq .skip .skip).denote model := by
  refine <rfl, ?_>
  -- `seq skip skip` compiles to `[[] ++ []` and denotes as `CQ.skip`.
  change CQ.skip = (Command.seq .skip .skip).denote model
  rfl

```

### 7.2.50 Interpretation of the branch of the quotation of the packaging

**Statement.** Packaging branch bridge: Hom-side certificate interprets as `Command.denote`. Formally: `interpretQuoteHom model (.branch hYes hNo) c = (Command.branch guard yes no).denote model`.

**Proof.** By definition. Unfolding the interpretation of a quoted morphism turns the left-hand side, the interpretation of a quoted morphism of `model`, the branch of `hYes` and `hNo`, `c`, into the right-hand side, `(Command.branch guard yes no).denote model`; the two sides are the same term.

#### Lean 4 source `QLambda/Linear/FragmentQuoteBridgeExt.lean`

```

theorem interpret_branch_quote_packaging (model : Composer.Model 1 1)
  (guard : Composer.CExpr 1) {yes no : Command 1 1}
  (hYes : yes.Quotable) (hNo : no.Quotable)
  (c : FragCert.Closed (Command.branch guard yes no).quote
    Command.quotationTy) :
  interpretQuoteHom model (.branch hYes hNo) c =
    (Command.branch guard yes no).denote model :=
  rfl

```

### 7.2.51 Covering-set package: `t`, `reset`, `measure`, `seq-skip`, and branch packaging

**Statement.** Covering-set package: `t`, `reset`, `measure`, `seq-skip`, and branch packaging.

**Proof.** The witness is assembled directly from its components, using the quotation of the interpretation of the `T` gate.

#### Lean 4 source `QLambda/Linear/FragmentQuoteBridgeExt.lean`

```

theorem fragCert_spine_interprets_t_reset_measure_seq_branch
  (model : Composer.Model 1 1) (w : Fin 1) :
  (interpretQuoteSpineExt model (.gateT (fragCert_t_quote_denote w)) =
    (Command.t w).denote model) /\
  (interpretQuoteSpineExt model
    (.gateReset (fragCert_reset_quote_denote w)) =
    (Command.reset w).denote model) /\
  (interpretQuoteSpineExt model
    (.measure (fragCert_measure_quote_denote (0 : Fin 1) (0 : Fin 1))) =
    (Command.measure (0 : Fin 1) (0 : Fin 1)).denote model) /\
  (interpretQuoteSpineExt model
    (.seqSkipSkip fragCert_skip_quote_denote) =
    (Command.seq .skip .skip).denote model) /\

```

```

(forall (guard : Composer.CExpr 1) {yes no : Command 1 1}
  (hYes : yes.Quotable) (hNo : no.Quotable)
  (c : FragCert.Closed (Command.branch guard yes no).quote
    Command.quotationTy),
  interpretQuoteHom model (.branch hYes hNo) c =
    (Command.branch guard yes no).denote model) :=
<(interpret_t_quote model w (fragCert_t_quote w)
  (fragCert_t_quote_denote w)).2,
(interpret_reset_quote model w (fragCert_reset_quote w)
  (fragCert_reset_quote_denote w)).2,
(interpret_measure_quote model (0 : Fin 1) (0 : Fin 1)
  (fragCert_measure_quote (0 : Fin 1) (0 : Fin 1))
  (fragCert_measure_quote_denote (0 : Fin 1) (0 : Fin 1))).2,
(interpret_seq_skip_skip_quote model fragCert_skip_quote
  fragCert_skip_quote_denote).2,
fun guard {_yes} {_no} hYes hNo c =>
  interpret_branch_quote_packaging model guard hYes hNo c>

```

### 7.2.52 Definition of the unused context of circuit commands

**Definition.** The unused context of  $n$  is a linear context.

**Construction.** Defined to be the constant list of  $n$  and `none`.

**Lean 4 source** [QLambda/Linear/Quotation.lean](#)

```

private def unused (n : Nat) : List (Option Ty) :=
  List.replicate n none

```

### 7.2.53 Definition of the live qubit of circuit commands

**Definition.** The live qubit of  $n$  is a linear context.

**Construction.** Defined to be the present value  $n$ .

**Lean 4 source** [QLambda/Linear/Quotation.lean](#)

```

private def liveQubit (n : Nat) : List (Option Ty) :=
  some .qubit :: unused n

```

### 7.2.54 Admissibility of the bit

**Statement.** `.bit` is admissible. Formally: `Ty.Admissible .bit`.

**Proof.** The proof term combines the facts named in it directly.

**Lean 4 source** [QLambda/Linear/Quotation.lean](#)

```

private theorem bit_admissible : Ty.Admissible .bit :=
  Ty.admissible_eq_true_iff.mp rfl

```

### 7.2.55 Admissibility of the qubit

**Statement.** `.qubit` is admissible. Formally: `Ty.Admissible .qubit`.

**Proof.** The proof term combines the facts named in it directly.

**Lean 4 source** `QLambda/Linear/Quotation.lean`

```
private theorem qubit_admissible : Ty.Admissible .qubit :=
  Ty.admissible_eq_true_iff.mp rfl
```

### 7.2.56 Duplicability of the bit

**Statement.** `Ty.Duplicable .bit`. Formally: `Ty.Duplicable .bit`.

**Proof.** The proof term combines the facts named in it directly.

**Lean 4 source** `QLambda/Linear/Quotation.lean`

```
private theorem bit_duplicable : Ty.Duplicable .bit :=
  Ty.duplicable_eq_true_iff.mp rfl
```

### 7.2.57 Exact command fragment represented by the current source primitives

**Definition.** Exact command fragment represented by the current source primitives.

**Construction.** Generated by the rules `skip`, `x`, `h`, `t`, `ry`, `measure`, `reset`, `store`, `seq` and `branch`. Every element arises from finitely many applications of these rules, so properties are proved by induction over them.

**Lean 4 source** `QLambda/Linear/Quotation.lean`

```
inductive Quotable : Command 1 1 -> Prop where
| skip : Quotable .skip
| x {w} : Quotable (.x w)
| h {w} : Quotable (.h w)
| t {w} : Quotable (.t w)
| ry {r w} : Quotable (.ry (.rational r) w)
| measure {qbit cbit} : Quotable (.measure qbit cbit)
| reset {qbit} : Quotable (.reset qbit)
| store {cbit e} : Quotable (.store cbit e)
| seq {A B} : Quotable A -> Quotable B -> Quotable (.seq A B)
| branch {guard yes no} :
  Quotable yes -> Quotable no -> Quotable (.branch guard yes no)
```

### 7.2.58 Well-formedness of quotable commands

**Statement.** For a circuit command `C`: if `C` is quotable, then `C` is well formed.

**Proof.** By induction on the derivation that `C` is quotable. The cases of a `skip`, the Pauli-X gate, the Hadamard gate, the T gate, a Y-rotation, a measurement, `reset` and a `store` are immediate; for a sequential composition, applying the same rule to the induction hypothesis gives the claim; for a `branch`, applying the same rule to the induction hypothesis gives the claim.

### Lean 4 source `QLambda/Linear/Quotation.lean`

```
theorem Quotable.wellFormed {C : Command 1 1} (hC : Quotable C) :  
  C.WellFormed := by  
  induction hC with  
  | skip => exact .skip  
  | x => exact .x  
  | h => exact .h  
  | t => exact .t  
  | ry => exact .ry  
  | measure => exact .measure  
  | reset => exact .reset  
  | store => exact .store  
  | seq _ _ ihA ihB => exact .seq ihA ihB  
  | branch _ _ ihYes ihNo => exact .branch ihYes ihNo
```

#### 7.2.59 Empty usage mask of the unused context for circuit commands

**Statement.** For a natural number  $n$ : `unused n` is an empty usage mask.

**Proof.** The goal is simplified using the definition of the unused context.

### Lean 4 source `QLambda/Linear/Quotation.lean`

```
private theorem allNone_unused (n : Nat) : AllNone (unused n) := by  
  simp [unused] using allNone_replicate_none n
```

#### 7.2.60 Split of the unused context for circuit commands

**Statement.** For a natural number  $n$ : `unused n` splits into the left part `unused n` and the right part `unused n`.

**Proof.** It follows from the fact that an empty mask splits as itself on both sides.

### Lean 4 source `QLambda/Linear/Quotation.lean`

```
private theorem split_unused (n : Nat) :  
  OSplit (unused n) (unused n) (unused n) := by  
  exact OSplit.self_of_allNone (allNone_unused n)
```

#### 7.2.61 Split of the live for circuit commands, in the left argument

**Statement.** For a natural number  $n$ : `liveQubit n` splits into the left part `liveQubit n` and the right part `unused (n + 1)`.

**Proof.** The goal is simplified using the definition of the live qubit, the definition of the unused context and the recursion equation for constant lists.

### Lean 4 source `QLambda/Linear/Quotation.lean`

```
private theorem split_live_left (n : Nat) :  
  OSplit (liveQubit n) (liveQubit n) (unused (n + 1)) := by  
  simp [liveQubit, unused, List.replicate_succ] using  
    (OSplit.left (split_unused n))
```

### 7.2.62 Split of the live for circuit commands, in the right argument

**Statement.** For a natural number  $n$ : `liveQubit n` splits into the left part `unused (n + 1)` and the right part `liveQubit n`.

**Proof.** The proof term combines the facts named in it directly.

**Lean 4 source** [QLambda/Linear/Quotation.lean](#)

```
private theorem split_live_right (n : Nat) :  
  OSplit (liveQubit n) (unused (n + 1)) (liveQubit n) :=  
  (split_live_left n).symm
```

### 7.2.63 Well-typedness of the live variable for circuit commands

**Statement.** For an unrestricted context  $\Gamma$ , a natural number  $n$ : `.var .lin 0` has type `.qubit` under the unrestricted context  $\Gamma$  and the linear context `liveQubit n`.

**Proof.** The claim follows directly from the definitions of the objects involved.

**Lean 4 source** [QLambda/Linear/Quotation.lean](#)

```
private theorem typed_live_var (Gamma : List Ty) (n : Nat) :  
  HasType Gamma (liveQubit n) (.var .lin 0) .qubit := by  
  exact .varL .zero (allNone_unused n)
```

### 7.2.64 Well-typedness of the bit of the variable for circuit commands

**Statement.** For an unrestricted context  $\Gamma$ , a natural number  $n$ : `.var .unres 0` has type `.bit` under the unrestricted context `.bit` and the linear context `unused n`.

**Proof.** The claim follows directly from the definitions of the objects involved.

**Lean 4 source** [QLambda/Linear/Quotation.lean](#)

```
private theorem typed_bit_var (Gamma : List Ty) (n : Nat) :  
  HasType (.bit :: Gamma) (unused n) (.var .unres 0) .bit := by  
  exact .varU .zero bit_duplicable (allNone_unused n)
```

### 7.2.65 Interpret a one-bit classical expression as a pure source bit term

**Definition.** Interpret a one-bit classical expression as a pure source bit term. The supplied term is the current value of the sole classical slot. Exposed for fragment-binder induction on quotations (Track F7).

**Construction.** Defined by cases on the input: `.lit b`  $\mapsto$  the bit literal of `b`; `.bit _`  $\mapsto$  `current`; `.not e`  $\mapsto$  the conditional of the quotation of a classical expression of `current` and `e`, the bit literal of `false`, the bit literal of `true`; `.and e1 e2`  $\mapsto$  the conditional of the quotation of a classical expression of `current` and `e1`, the quotation of a classical expression of `current` and `e2`, the bit literal of `false`; `.or e1 e2`  $\mapsto$  the conditional of the quotation of a classical expression of `current` and `e1`, the bit literal of `true`, the quotation of a classical expression of `current` and `e2`; `.xor e1 e2`  $\mapsto$  the conditional of the quotation of a classical expression of `current` and `e1`.

**Lean 4 source** [QLambda/Linear/Quotation.lean](#)

```

def quoteCEExpr (current : Term) : Composer.CExpr 1 -> Term
| .lit b => .bitLit b
| .bit _ => current
| .not e => .ite (quoteCEExpr current e) (.bitLit false) (.bitLit true)
| .and e_1 e_2 =>
  .ite (quoteCEExpr current e_1) (quoteCEExpr current e_2) (.bitLit false)
| .or e_1 e_2 =>
  .ite (quoteCEExpr current e_1) (.bitLit true) (quoteCEExpr current e_2)
| .xor e_1 e_2 =>
  .ite (quoteCEExpr current e_1)
    (.ite (quoteCEExpr current e_2) (.bitLit false) (.bitLit true))
    (quoteCEExpr current e_2)

```

## 7.2.66 The quotation of a classical expression is well typed

**Statement.** For an unrestricted context  $\Gamma$ , a term  $\text{current}$ , a natural number  $n$ : if for every  $n$ ,  $\text{current}$  has type  $\text{.bit}$  under the unrestricted context  $\text{.bit}$  and the linear context  $\text{unused } n$ , then  $\text{quoteCEExpr current } e$  has type  $\text{.bit}$  under the unrestricted context  $\text{.bit}$  and the linear context  $\text{unused } n$ .

**Proof.** By induction on  $e$ . For a `lit` and a `bit`, the claim is checked directly; for a `not`, an `and`, an `or` and a `xor`, the claim follows from the induction hypothesis. It follows from the hypothesis that for every  $n$ ,  $\text{current}$  has type  $\text{.bit}$  under the unrestricted context  $\text{.bit}$  and the linear context  $\text{unused } n$ .

### Lean 4 source `QLambda/Linear/Quotation.lean`

```

theorem quoteCEExpr_typed
  {Gamma : List Ty} {current : Term}
  (hcurrent : forall n, HasType (.bit :: Gamma) (unused n) current .bit) :
  forall (e : Composer.CExpr 1) (n : Nat),
    HasType (.bit :: Gamma) (unused n) (quoteCEExpr current e) .bit := by
intro e
induction e with
| lit b =>
  intro n
  exact .bitLit (allNone_unused n)
| bit i =>
  intro n
  exact hcurrent n
| not e ih =>
  intro n
  exact .ite (split_unused n) (ih n)
    (.bitLit (allNone_unused n)) (.bitLit (allNone_unused n))
| and e_1 e_2 ih_1 ih_2 =>
  intro n
  exact .ite (split_unused n) (ih_1 n) (ih_2 n)
    (.bitLit (allNone_unused n))
| or e_1 e_2 ih_1 ih_2 =>
  intro n
  exact .ite (split_unused n) (ih_1 n)
    (.bitLit (allNone_unused n)) (ih_2 n)
| xor e_1 e_2 ih_1 ih_2 =>
  intro n
  have hnot :
    HasType (.bit :: Gamma) (unused n)
      (.ite (quoteCEExpr current e_2) (.bitLit false) (.bitLit true)) .bit :=

```

```

    .ite (split_unused n) (ih_2 n)
      (.bitLit (allNone_unused n)) (.bitLit (allNone_unused n))
  exact .ite (split_unused n) (ih_1 n) hnot (ih_2 n)

```

## 7.2.67 CPS quotation of a command body

**Definition.** CPS quotation of a command body. The current wire is always linear index zero; `current` is a pure term denoting the current classical slot. Exposed for fragment-binder induction on quotations (Track F7).

**Construction.** Defined by cases on the input: `.skip`  $\mapsto$  the `k` of `current`; `.x _`  $\mapsto$  the application of the lambda abstraction of a linear, a qubit, `k current`; `.h _`  $\mapsto$  the application of the lambda abstraction of a linear, a qubit, `k current`; `.t _`  $\mapsto$  the application of the lambda abstraction of a linear, a qubit, `k current`; `.ry  $\theta$  _`  $\mapsto$  the let of angle and `:=`; `.rational  $r$`   $\mapsto r$ ; `.coin  $p$`   $\mapsto$  the val of `p`; `.cx _ _`  $\mapsto$  the `k` of `current`; and so on for the remaining cases.

### Lean 4 source `QLambda/Linear/Quotation.lean`

```

def quoteBody (C : Command 1 1) (current : Term)
  (k : Term -> Term) : Term :=
  match C with
  | .skip => k current
  | .x _ =>
    .app (.lam .lin .qubit (k current))
      (.app (.prim .x) (.var .lin 0))
  | .h _ =>
    .app (.lam .lin .qubit (k current))
      (.app (.prim .h) (.var .lin 0))
  | .t _ =>
    .app (.lam .lin .qubit (k current))
      (.app (.prim .t) (.var .lin 0))
  | .ry ? _ =>
    let angle :=
      match ? with
      | .rational r => r
      | .coin p => p.val
    .app (.lam .lin .qubit (k current))
      (.app (.prim (.ry angle)) (.var .lin 0))
  | .cx _ _ => k current
  | .measure _ _ =>
    .measure (.var .lin 0)
      (.lam .unres .bit (.lam .lin .qubit (k (.var .unres 0))))
  | .reset _ =>
    .app (.lam .lin .qubit (k current))
      (.app (.prim .reset) (.var .lin 0))
  | .store _ e => k (quoteCExpr current e)
  | .seq A B =>
    quoteBody A current (fun next => quoteBody B next k)
  | .branch guard yes no =>
    .ite (quoteCExpr current guard)
      (quoteBody yes current k) (quoteBody no current k)

```



### 7.2.68 Definition of the well-typed continuation

**Definition.** The well-typed continuation of  $k$  is a proposition-valued predicate, defined below.

**Construction.** Defined by an explicit formula built from the term, the typing judgement, the unused context and the live qubit.

#### Lean 4 source `QLambda/Linear/Quotation.lean`

```
def ContinuationTyped (k : Term -> Term) : Prop :=
  forall (Gamma : List Ty) (n : Nat) (current : Term),
    (forall m, HasType (.bit :: Gamma) (unused m) current .bit) ->
      HasType (.bit :: Gamma) (liveQubit n) (k current)
        (.tensor .qubit .bit)
```

### 7.2.69 The gate argument is well typed

**Statement.** For an unrestricted context  $\Gamma$ , a natural number  $n$ , a primitive  $p$ : if  $\text{primTy } p = \text{.arrow .lin .qubit .qubit}$ , then  $\text{.app (.prim } p) (\text{.var .lin } 0)$  has type  $\text{.qubit}$  under the unrestricted context  $\Gamma$  and the linear context  $\text{liveQubit } n$ .

**Proof.** The goal is simplified using the hypothesis that  $\text{primTy } p = \text{.arrow .lin .qubit .qubit}$  and the well-typedness of the live variable for circuit commands.

#### Lean 4 source `QLambda/Linear/Quotation.lean`

```
theorem gateArg_typed (Gamma : List Ty) (n : Nat) (p : Prim)
  (hp : primTy p = .arrow .lin .qubit .qubit) :
  HasType Gamma (liveQubit n)
    (.app (.prim p) (.var .lin 0)) .qubit := by
  apply HasType.appL (split_live_right n)
  * simp [hp] using
    (HasType.prim (Gamma := Gamma) (Delta := unused (n + 1)) (p := p)
      (allNone_unused (n + 1)))
  * exact typed_live_var Gamma n
```

### 7.2.70 The quoted body is well typed

**Statement.** For a circuit command  $C$ , an unrestricted context  $\Gamma$ , a natural number  $n$ , a term  $\text{current}$ : if  $C$  is quotable; the continuation  $k$  is well typed; and for every  $m$ ,  $\text{current}$  has type  $\text{.bit}$  under the unrestricted context  $\text{.bit}$  and the linear context  $\text{unused } m$ , then  $\text{quoteBody } C \text{ current } k$  has type  $\text{.tensor .qubit .bit}$  under the unrestricted context  $\text{.bit}$  and the linear context  $\text{liveQubit } n$ .

**Proof.** By induction on the derivation that  $C$  is quotable. For a skip, the Pauli-X gate, the Hadamard gate, the T gate, a Y-rotation, a measurement, reset and a store, the claim is checked directly; for a sequential composition and a branch, the claim follows from the induction hypothesis. The goal is simplified using the definition of the quoted body, the hypothesis that the continuation  $k$  is well typed, the admissibility of the qubit and the fact that the gate argument is well typed.

#### Lean 4 source `QLambda/Linear/Quotation.lean`

```
theorem quoteBody_typed {C : Command 1 1}
  (hC : C.Quotable) {k : Term -> Term}
```

```

(hk : ContinuationTyped k) :
forall (Gamma : List Ty) (n : Nat) (current : Term),
  (forall m, HasType (.bit :: Gamma) (unused m) current .bit) ->
  HasType (.bit :: Gamma) (liveQubit n) (quoteBody C current k)
  (.tensor .qubit .bit) := by
induction hC generalizing k with
| skip =>
  intro Gamma n current hcurrent
  exact hk Gamma n current hcurrent
| x =>
  intro Gamma n current hcurrent
  apply HasType.appL (split_live_right n)
  * apply HasType.lamL
    * exact qubit_admissible
    exact hk Gamma (n + 1) current hcurrent
  * exact gateArg_typed (.bit :: Gamma) n .x rfl
| h =>
  intro Gamma n current hcurrent
  apply HasType.appL (split_live_right n)
  * apply HasType.lamL
    * exact qubit_admissible
    exact hk Gamma (n + 1) current hcurrent
  * exact gateArg_typed (.bit :: Gamma) n .h rfl
| t =>
  intro Gamma n current hcurrent
  apply HasType.appL (split_live_right n)
  * apply HasType.lamL
    * exact qubit_admissible
    exact hk Gamma (n + 1) current hcurrent
  * exact gateArg_typed (.bit :: Gamma) n .t rfl
| ry =>
  intro Gamma n current hcurrent
  apply HasType.appL (split_live_right n)
  * apply HasType.lamL
    * exact qubit_admissible
    exact hk Gamma (n + 1) current hcurrent
  * exact gateArg_typed (.bit :: Gamma) n (.ry _) rfl
| measure =>
  intro Gamma n current hcurrent
  apply HasType.measure (split_live_left n)
  * exact typed_live_var (.bit :: Gamma) n
  * apply HasType.lamU bit_admissible bit_duplicable
    (allNone_unused (n + 1))
  apply HasType.lamL
  * exact qubit_admissible
  apply hk (.bit :: Gamma) (n + 1) (.var .unres 0)
  intro m
  exact typed_bit_var (.bit :: Gamma) m
| reset =>
  intro Gamma n current hcurrent
  apply HasType.appL (split_live_right n)
  * apply HasType.lamL
    * exact qubit_admissible
    exact hk Gamma (n + 1) current hcurrent
  * exact gateArg_typed (.bit :: Gamma) n .reset rfl
| store =>

```

```

    rename_i cbit e
    intro Gamma n current hcurrent
    simp [quoteBody] using
      hk Gamma n (quoteCEExpr current e)
      (fun m => quoteCEExpr_typed hcurrent e m)
| seq hA hB ihA ihB =>
  intro Gamma n current hcurrent
  apply ihA
  * intro Gamma' n' next hnext
    exact ihB hk Gamma' n' next hnext
  * exact hcurrent
| branch hy hn ihy ihn =>
  intro Gamma n current hcurrent
  apply HasType.ite (split_live_right n)
  * exact quoteCEExpr_typed hcurrent _ (n + 1)
  * exact ihy hk Gamma n current hcurrent
  * exact ihn hk Gamma n current hcurrent

```

### 7.2.71 The closed source type of one-wire, one-bit canonical quotations

**Definition.** The closed source type of one-wire, one-bit canonical quotations.

**Construction.** Defined to be the function type of an unrestricted, a bit, the function type of a linear, a qubit, `.tensor .qubit .bit`.

#### Lean 4 source `QLambda/Linear/Quotation.lean`

```

def quotationTy : Ty :=
  .arrow .unres .bit
  (.arrow .lin .qubit (.tensor .qubit .bit))

```

### 7.2.72 Canonical lambda quotation

**Definition.** Canonical lambda quotation. The classical slot is bound unrestrictedly and the quantum wire is bound linearly.

**Construction.** Defined by an explicit formula built from the quoted body.

#### Lean 4 source `QLambda/Linear/Quotation.lean`

```

def quote (C : Command 1 1) : Term :=
  .lam .unres .bit <|
    .lam .lin .qubit <|
      quoteBody C (.var .unres 0)
      (fun current => .pair (.var .lin 0) current)

```

### 7.2.73 Every supported command in the exact one-wire/one-bit fragment has a well-typed canonical lambda quotation

**Statement.** Every supported command in the exact one-wire/one-bit fragment has a well-typed canonical lambda quotation. Formally: `HasType [] [] C.quote quotationTy`.

**Proof.** It follows from the definition of the quotation, the definition of the quotation type, the admissibility of the qubit and the fact that the quoted body is well typed.

#### Lean 4 source `QLambda/Linear/Quotation.lean`

```
theorem quote_typed {C : Command 1 1} (hC : C.Quotable) :
  HasType [] [] C.quote quotationTy := by
  unfold quote quotationTy
  apply HasType.lamU (Gamma := []) (Delta := [])
  bit_admissible bit_duplicable trivial
  apply HasType.lamL
  * exact qubit_admissible
  change HasType [.bit] (liveQubit 0)
  (quoteBody C (.var .unres 0)
    (fun current => .pair (.var .lin 0) current))
  (.tensor .qubit .bit)
  apply quoteBody_typed hC
  * intro Gamma n current hcurrent
  exact HasType.pair (split_live_left n)
    (typed_live_var (.bit :: Gamma) n) (hcurrent (n + 1))
  * intro m
  exact typed_bit_var [] m
```

### 7.2.74 A term in the canonical compilable fragment

**Definition.** A term in the canonical compilable fragment. The proof field certifies both source typing (via `quote_typed`) and the static `cx` side condition.

**Construction.** An element consists of `command`, subject to the laws `quotable`.

#### Lean 4 source `QLambda/Linear/Quotation.lean`

```
structure Quotation where
  command : Command 1 1
  quotable : command.Quotable
```

### 7.2.75 The actual linear lambda term represented by a certified quotation

**Definition.** The actual linear lambda term represented by a certified quotation.

**Construction.** Defined to be the quotation.

#### Lean 4 source `QLambda/Linear/Quotation.lean`

```
def term (Q : Quotation) : Term :=
  Q.command.quote
```

### 7.2.76 Typing for quotations

**Statement.** `Q.term` has type `quotationTy` under the unrestricted context `[]` and the linear context `[]`.

**Proof.** This is an instance of the fact that every supported command in the exact one-wire/one-bit fragment has a well-typed canonical lambda quotation.

#### Lean 4 source `QLambda/Linear/Quotation.lean`

```
theorem typing (Q : Quotation) :  
  HasType [] [] Q.term quotationTy :=  
  quote_typed Q.quotable
```

#### 7.2.77 Term-to-command compilation, total on the certified canonical fragment

**Definition.** Term-to-command compilation, total on the certified canonical fragment.

**Construction.** Defined to be the circuit command of  $Q$ .

#### Lean 4 source `QLambda/Linear/Quotation.lean`

```
def compile (Q : Quotation) : Command 1 1 :=  
  Q.command
```

#### 7.2.78 Command-to-term reflection

**Definition.** Command-to-term reflection.

**Construction.** Constructed by supplying each component of the structure explicitly.

#### Lean 4 source `QLambda/Linear/Quotation.lean`

```
def reflect (C : Command 1 1) (hC : C.Quotable) : Quotation :=  
  <C, hC>
```

#### 7.2.79 Reflection followed by compilation is exact

**Statement.** Reflection followed by compilation is exact, preserving the pre-existing circuit-to-circuit roundtrip rather than merely normalizing it. Formally:  $(\text{reflect } C \text{ hC}).\text{compile} = C$ .

**Proof.** By definition. Unfolding the compilation turns the left-hand side,  $(\text{reflect } C \text{ hC}).\text{compile}$ , into the right-hand side,  $C$ ; the two sides are the same term.

#### Lean 4 source `QLambda/Linear/Quotation.lean`

```
@[simp] theorem compile_reflect (C : Command 1 1) (hC : C.Quotable) :  
  (reflect C hC).compile = C :=  
  rfl
```

#### 7.2.80 Compilation followed by reflection returns the same canonical term

**Statement.** Compilation followed by reflection returns the same canonical term. Formally:  $(\text{reflect } Q.\text{compile } Q.\text{quotable}).\text{term} = Q.\text{term}$ .

**Proof.** By definition. Unfolding the term turns the left-hand side,  $(\text{reflect } Q.\text{compile } Q.\text{quotable}).\text{term}$ , into the right-hand side, the term of  $Q$ ; the two sides are the same term.

#### Lean 4 source `QLambda/Linear/Quotation.lean`

```
@[simp] theorem reflect_compile_term (Q : Quotation) :
  (reflect Q.compile Q.quotable).term = Q.term :=
  rfl
```

### 7.2.81 The ideal CQ meaning of a certified canonical lambda quotation

**Definition.** The ideal CQ meaning of a certified canonical lambda quotation. At this stage boundary it is deliberately inherited from the represented command.

**Construction.** Defined to be the denotation of `model`.

#### Lean 4 source `QLambda/Linear/Quotation.lean`

```
noncomputable def denote (model : Composer.Model 1 1)
  (Q : Quotation) : CQ.Sem 1 1 :=
  Q.command.denote model
```

### 7.2.82 Compilation preserves ideal CQ denotation

**Statement.** Compilation preserves ideal CQ denotation. Formally:  $\text{Eq } (Q.\text{denote model}) (Q.\text{compile}.\text{denote model})$ .

**Proof.** This is an instance of the reflexivity for semantic equalities of circuits.

#### Lean 4 source `QLambda/Linear/Quotation.lean`

```
theorem denote_compile (model : Composer.Model 1 1) (Q : Quotation) :
  CQ.Eq (Q.denote model) (Q.compile.denote model) :=
  CQ.Eq.refl _
```

### 7.2.83 Reflection preserves ideal CQ denotation

**Statement.** Reflection preserves ideal CQ denotation. Formally:  $\text{Eq } ((\text{reflect } C \text{ hC}).\text{denote model}) (C.\text{denote model})$ .

**Proof.** This is an instance of the reflexivity for semantic equalities of circuits.

#### Lean 4 source `QLambda/Linear/Quotation.lean`

```
theorem denote_reflect (model : Composer.Model 1 1)
  (C : Command 1 1) (hC : C.Quotable) :
  CQ.Eq ((reflect C hC).denote model) (C.denote model) :=
  CQ.Eq.refl _
```

### 7.2.84 A command context observes its hole through sequencing and branching

**Definition.** A command context observes its hole through sequencing and branching.

**Construction.** Generated by the rules `hole`, `seqLeft`, `seqRight`, `branchYes` and `branchNo`. Every element arises from finitely many applications of these rules, so properties are proved by induction over them.

#### Lean 4 source `QLambda/Linear/Quotation.lean`

```

inductive Context where
| hole
| seqLeft : Context -> Command 1 1 -> Context
| seqRight : Command 1 1 -> Context -> Context
| branchYes : Composer.CExpr 1 -> Context -> Command 1 1 -> Context
| branchNo : Composer.CExpr 1 -> Command 1 1 -> Context -> Context

```

### 7.2.85 Definition of the plug of contexts

**Definition.** The plug is a function of type  $\text{Context} \rightarrow \text{Command } 1 \ 1 \rightarrow \text{Command } 1 \ 1$ .

**Construction.** Defined by cases on the input:  $\text{.hole}, C \mapsto C$ ;  $\text{.seqLeft } K \ B, C \mapsto$  the sequential composition of the plug of  $C$  and  $B$ ;  $\text{.seqRight } A \ K, C \mapsto$  the sequential composition of  $A$  and the plug of  $C$ ;  $\text{.branchYes guard } K \ \text{no}, C \mapsto$  the branch of guard, the plug of  $C$ , no;  $\text{.branchNo guard yes } K, C \mapsto$  the branch of guard, yes, the plug of  $C$ .

**Lean 4 source** [QLambda/Linear/Quotation.lean](#)

```

def Context.plug : Context -> Command 1 1 -> Command 1 1
| .hole, C => C
| .seqLeft K B, C => .seq (K.plug C) B
| .seqRight A K, C => .seq A (K.plug C)
| .branchYes guard K no, C => .branch guard (K.plug C) no
| .branchNo guard yes K, C => .branch guard yes (K.plug C)

```

### 7.2.86 Contextual equivalence is observational equality in every command context and every ideal Composer model

**Definition.** Contextual equivalence is observational equality in every command context and every ideal Composer model.

**Construction.** Defined by an explicit formula built from the context, the matrix model, the plug and the compilation.

**Lean 4 source** [QLambda/Linear/Quotation.lean](#)

```

def ContextuallyEq (Q R : Quotation) : Prop :=
  forall (K : Context) (model : Composer.Model 1 1),
    CQ.Eq ((K.plug Q.compile).denote model)
      ((K.plug R.compile).denote model)

```

### 7.2.87 Honest denotational/contextual reflection compilation

**Statement.** Honest denotational/contextual `reflect_compile`: the reflected command is literally the same canonical program, hence no unsupported source full abstraction claim is used. Formally:  $\text{ContextuallyEq } (\text{reflect } Q.\text{compile } Q.\text{quotable}) \ Q$ .

**Proof.** It follows from the reflexivity for semantic equalities of circuits.

**Lean 4 source** [QLambda/Linear/Quotation.lean](#)

```

theorem reflect_compile (Q : Quotation) :
  ContextuallyEq (reflect Q.compile Q.quotable) Q := by
  intro K model
  exact CQ.Eq.refl _

```

### 7.2.88 The declared finite register sizes of this quotation

**Definition.** The declared finite register sizes of this quotation.

**Construction.** Defined to be 2.

**Lean 4 source** [QLambda/Linear/QuotationGeneral.lean](#)

```

abbrev quantumSize : Nat := 2

```

### 7.2.89 Definition of the classical size of circuit commands

**Definition.** The classical size is a natural number.

**Construction.** Defined to be 1.

**Lean 4 source** [QLambda/Linear/QuotationGeneral.lean](#)

```

abbrev classicalSize : Nat := 1

```

### 7.2.90 Definition of the qubit-register type of circuit commands

**Definition.** The qubit-register type is a type.

**Construction.** Defined to be the tensor product of a qubit and a qubit.

**Lean 4 source** [QLambda/Linear/QuotationGeneral.lean](#)

```

def qubitRegisterTy : Ty :=
  .tensor .qubit .qubit

```

### 7.2.91 Definition of the result type of circuit commands

**Definition.** The result type is a type.

**Construction.** Defined to be the tensor product of the qubit-register type and a bit.

**Lean 4 source** [QLambda/Linear/QuotationGeneral.lean](#)

```

def resultTy : Ty :=
  .tensor qubitRegisterTy .bit

```



### 7.2.92 Curried source type for the fixed $2 \times 1$ register

**Definition.** Curried source type for the fixed  $2 \times 1$  register.

**Construction.** Defined by an explicit formula built from the result type.

**Lean 4 source** [QLambda/Linear/QuotationGeneral.lean](#)

```
def quotationTy : Ty :=
  .arrow .unres .bit <|
    .arrow .lin .qubit <|
      .arrow .lin .qubit resultTy
```

### 7.2.93 Definition of the unused context of circuit commands

**Definition.** The unused context of  $n$  is a linear context.

**Construction.** Defined to be the constant list of  $n$  and `none`.

**Lean 4 source** [QLambda/Linear/QuotationGeneral.lean](#)

```
private def unused (n : Nat) : List (Option Ty) :=
  List.replicate n none
```

### 7.2.94 Definition of the live register of circuit commands

**Definition.** The live register of  $n$  is a linear context.

**Construction.** Defined to be the present value  $n$ .

**Lean 4 source** [QLambda/Linear/QuotationGeneral.lean](#)

```
private def liveRegister (n : Nat) : List (Option Ty) :=
  some qubitRegisterTy :: unused n
```

### 7.2.95 Empty usage mask of the unused context for circuit commands

**Statement.** For a natural number  $n$ : `unused n` is an empty usage mask.

**Proof.** The goal is simplified using the definition of the unused context.

**Lean 4 source** [QLambda/Linear/QuotationGeneral.lean](#)

```
private theorem allNone_unused (n : Nat) : AllNone (unused n) := by
  simpa [unused] using allNone_replicate_none n
```

### 7.2.96 Split of the unused context for circuit commands

**Statement.** For a natural number  $n$ : `unused n` splits into the left part `unused n` and the right part `unused n`.

**Proof.** This is an instance of the fact that an empty mask splits as itself on both sides.

**Lean 4 source** [QLambda/Linear/QuotationGeneral.lean](#)

```
private theorem split_unused (n : Nat) :
  OSplit (unused n) (unused n) (unused n) :=
  OSplit.self_of_allNone (allNone_unused n)
```

### 7.2.97 Split of the live for circuit commands, in the left argument

**Statement.** For a natural number  $n$ : `liveRegister n` splits into the left part `liveRegister n` and the right part `unused (n + 1)`.

**Proof.** The goal is simplified using the definition of the live register, the definition of the unused context and the recursion equation for constant lists.

**Lean 4 source** [QLambda/Linear/QuotationGeneral.lean](#)

```
private theorem split_live_left (n : Nat) :
  OSplit (liveRegister n) (liveRegister n) (unused (n + 1)) := by
  simpa [liveRegister, unused, List.replicate_succ] using
    (OSplit.left (split_unused n))
```

### 7.2.98 Split of the live for circuit commands, in the right argument

**Statement.** For a natural number  $n$ : `liveRegister n` splits into the left part `unused (n + 1)` and the right part `liveRegister n`.

**Proof.** The proof term combines the facts named in it directly.

**Lean 4 source** [QLambda/Linear/QuotationGeneral.lean](#)

```
private theorem split_live_right (n : Nat) :
  OSplit (liveRegister n) (unused (n + 1)) (liveRegister n) :=
  (split_live_left n).symm
```

### 7.2.99 Admissibility of the bit

**Statement.** `.bit` is admissible. Formally: `Ty.Admissible .bit`.

**Proof.** The proof term combines the facts named in it directly.

**Lean 4 source** [QLambda/Linear/QuotationGeneral.lean](#)

```
private theorem bit_admissible : Ty.Admissible .bit :=
  Ty.admissible_eq_true_iff.mp rfl
```

### 7.2.100 Duplicability of the bit

**Statement.** `Ty.Duplicable .bit`. Formally: `Ty.Duplicable .bit`.

**Proof.** The proof term combines the facts named in it directly.

**Lean 4 source** [QLambda/Linear/QuotationGeneral.lean](#)

```
private theorem bit_duplicable : Ty.Duplicable .bit :=
  Ty.duplicable_eq_true_iff.mp rfl
```

### 7.2.101 Admissibility of the qubit

**Statement.** `.qubit` is admissible. Formally: `Ty.Admissible .qubit`.

**Proof.** The proof term combines the facts named in it directly.

**Lean 4 source** `QLambda/Linear/QuotationGeneral.lean`

```
private theorem qubit_admissible : Ty.Admissible .qubit :=
  Ty.admissible_eq_true_iff.mp rfl
```

### 7.2.102 Admissibility of the register

**Statement.** `qubitRegisterTy` is admissible. Formally: `Ty.Admissible qubitRegisterTy`.

**Proof.** The proof term combines the facts named in it directly.

**Lean 4 source** `QLambda/Linear/QuotationGeneral.lean`

```
private theorem register_admissible : Ty.Admissible qubitRegisterTy :=
  Ty.admissible_eq_true_iff.mp rfl
```

### 7.2.103 Well-typedness of the register of the variable for circuit commands

**Statement.** For an unrestricted context  $\Gamma$ , a natural number  $n$ : `.var .lin 0` has type `qubitRegisterTy` under the unrestricted context  $\Gamma$  and the linear context `liveRegister n`.

**Proof.** Built directly by the a linear variable rule.

**Lean 4 source** `QLambda/Linear/QuotationGeneral.lean`

```
private theorem typed_register_var (Gamma : List Ty) (n : Nat) :
  HasType Gamma (liveRegister n) (.var .lin 0) qubitRegisterTy :=
  .varL .zero (allNone_unused n)
```

### 7.2.104 Well-typedness of the bit of the variable for circuit commands

**Statement.** For an unrestricted context  $\Gamma$ , a natural number  $n$ : `.var .unres 0` has type `.bit` under the unrestricted context `.bit` and the linear context `unused n`.

**Proof.** Built directly by the an unrestricted variable rule.

**Lean 4 source** `QLambda/Linear/QuotationGeneral.lean`

```
private theorem typed_bit_var (Gamma : List Ty) (n : Nat) :
  HasType (.bit :: Gamma) (unused n) (.var .unres 0) .bit :=
  .varU .zero bit_duplicable (allNone_unused n)
```

### 7.2.105 Exactly the target angles represented by source Y-rotation gate

**Definition.** Exactly the target angles represented by source `Prim.ry`.

**Construction.** Generated by the rules `rational`. Every element arises from finitely many applications of these rules, so properties are proved by induction over them.

**Lean 4 source** `QLambda/Linear/QuotationGeneral.lean`

```
inductive AngleQuotable : Composer.AngleExpr -> Prop where
| rational (r : ?) : AngleQuotable (.rational r)
```

### 7.2.106 Probability-derived Composer angles have no exact source primitive

**Statement.** Probability-derived Composer angles have no exact source primitive. Formally:  $\neg \text{AngleQuotable } (.coin\ p)$ .

**Proof.** The hypotheses are unpacked into their constituent data.

**Lean 4 source** `QLambda/Linear/QuotationGeneral.lean`

```
theorem coin_not_quotable (p : Composer.Probability) :
  not AngleQuotable (.coin p) := by
  intro h
  cases h
```

### 7.2.107 Exact circuit command of 2 and 1 fragment represented by this module

**Definition.** Exact `Command 2 1` fragment represented by this module.

**Construction.** Generated by the rules `skip`, `x`, `h`, `t`, `ry`, `cx`, `measure`, `reset`, `store`, `seq` and `branch`. Every element arises from finitely many applications of these rules, so properties are proved by induction over them.

**Lean 4 source** `QLambda/Linear/QuotationGeneral.lean`

```
inductive Quotable : Command quantumSize classicalSize -> Prop where
| skip : Quotable .skip
| x {w} : Quotable (.x w)
| h {w} : Quotable (.h w)
| t {w} : Quotable (.t w)
| ry {? w} : AngleQuotable ? -> Quotable (.ry ? w)
| cx {control target} :
  control != target -> Quotable (.cx control target)
| measure {qbit cbit} : Quotable (.measure qbit cbit)
| reset {qbit} : Quotable (.reset qbit)
| store {cbit e} : Quotable (.store cbit e)
| seq {A B} : Quotable A -> Quotable B -> Quotable (.seq A B)
| branch {guard yes no} :
  Quotable yes -> Quotable no -> Quotable (.branch guard yes no)
```

### 7.2.108 Well-formedness of quotable commands

**Statement.** For a circuit command  $C$ : if  $C$  is quotable, then  $C$  is well formed.

**Proof.** By induction on the derivation that  $C$  is quotable. The cases of a skip, the Pauli-X gate, the Hadamard gate, the T gate, a Y-rotation, a measurement, reset and a store are immediate; for the controlled-NOT gate, the claim is checked directly; for a sequential composition, applying the same rule to the induction hypothesis gives the claim; for a branch, applying the same rule to the induction hypothesis gives the claim.

**Lean 4 source** [QLambda/Linear/QuotationGeneral.lean](#)

```
theorem Quotable.wellFormed
  {C : Command quantumSize classicalSize} (hC : Quotable C) :
  C.WellFormed := by
  induction hC with
  | skip => exact .skip
  | x => exact .x
  | h => exact .h
  | t => exact .t
  | ry => exact .ry
  | cx hne => exact .cx hne
  | measure => exact .measure
  | reset => exact .reset
  | store => exact .store
  | seq _ _ ihA ihB => exact .seq ihA ihB
  | branch _ _ ihYes ihNo => exact .branch ihYes ihNo
```

### 7.2.109 Interpret the sole classical register cell as a pure source bit term

**Definition.** Interpret the sole classical register cell as a pure source bit term.

**Construction.** Defined by cases on the input:  $\text{.lit } b \mapsto$  the bit literal of  $b$ ;  $\text{.bit } _ \mapsto$  current;  $\text{.not } e \mapsto$  the conditional of the quotation of a classical expression of current and  $e$ , the bit literal of false, the bit literal of true;  $\text{.and } e_1 \ e_2 \mapsto$  the conditional of the quotation of a classical expression of current and  $e_1$ , the quotation of a classical expression of current and  $e_2$ , the bit literal of false;  $\text{.or } e_1 \ e_2 \mapsto$  the conditional of the quotation of a classical expression of current and  $e_1$ , the bit literal of true, the quotation of a classical expression of current and  $e_2$ ;  $\text{.xor } e_1 \ e_2 \mapsto$  the conditional of the quotation of a classical expression of current and  $e_1$ .

**Lean 4 source** [QLambda/Linear/QuotationGeneral.lean](#)

```
def quoteCEExpr (current : Term) : Composer.CExpr classicalSize -> Term
| .lit b => .bitLit b
| .bit _ => current
| .not e => .ite (quoteCEExpr current e) (.bitLit false) (.bitLit true)
| .and e_1 e_2 =>
  .ite (quoteCEExpr current e_1) (quoteCEExpr current e_2) (.bitLit false)
| .or e_1 e_2 =>
  .ite (quoteCEExpr current e_1) (.bitLit true) (quoteCEExpr current e_2)
| .xor e_1 e_2 =>
  .ite (quoteCEExpr current e_1)
    (.ite (quoteCEExpr current e_2) (.bitLit false) (.bitLit true))
    (quoteCEExpr current e_2)
```

### 7.2.110 The quotation of a classical expression is well typed

**Statement.** For an unrestricted context  $\Gamma$ , a term `current`, a natural number  $n$ : if for every  $n$ , `current` has type `.bit` under the unrestricted context `.bit` and the linear context `unused n`, then `quoteCEExpr current e` has type `.bit` under the unrestricted context `.bit` and the linear context `unused n`.

**Proof.** By induction on `e`. For a `lit` and a `bit`, the claim is checked directly; for a `not`, `and`, `or` and a `xor`, the claim follows from the induction hypothesis. It follows from the hypothesis that for every  $n$ , `current` has type `.bit` under the unrestricted context `.bit` and the linear context `unused n`.

#### Lean 4 source `QLambda/Linear/QuotationGeneral.lean`

```
private theorem quoteCEExpr_typed
  {Gamma : List Ty} {current : Term}
  (hcurrent : forall n, HasType (.bit :: Gamma) (unused n) current .bit) :
  forall (e : Composer.CExpr classicalSize) (n : Nat),
    HasType (.bit :: Gamma) (unused n) (quoteCEExpr current e) .bit := by
  intro e
  induction e with
  | lit b =>
    intro n
    exact .bitLit (allNone_unused n)
  | bit i =>
    intro n
    exact hcurrent n
  | not e ih =>
    intro n
    exact .ite (split_unused n) (ih n)
      (.bitLit (allNone_unused n)) (.bitLit (allNone_unused n))
  | and e_1 e_2 ih_1 ih_2 =>
    intro n
    exact .ite (split_unused n) (ih_1 n) (ih_2 n)
      (.bitLit (allNone_unused n)) (.bitLit (allNone_unused n))
  | or e_1 e_2 ih_1 ih_2 =>
    intro n
    exact .ite (split_unused n) (ih_1 n)
      (.bitLit (allNone_unused n)) (ih_2 n)
  | xor e_1 e_2 ih_1 ih_2 =>
    intro n
    have hnot :
      HasType (.bit :: Gamma) (unused n)
        (.ite (quoteCEExpr current e_2) (.bitLit false) (.bitLit true)) .bit :=
      .ite (split_unused n) (ih_2 n)
        (.bitLit (allNone_unused n)) (.bitLit (allNone_unused n))
    exact .ite (split_unused n) (ih_1 n) hnot (ih_2 n)
```

### 7.2.111 Apply a unary source primitive to one component of a two-qubit tensor

**Definition.** Apply a unary source primitive to one component of a two-qubit tensor.

**Construction.** Defined by an explicit formula built from the qubit-register type.

#### Lean 4 source `QLambda/Linear/QuotationGeneral.lean`

```
def unaryRegister (p : Prim) (w : Fin quantumSize) : Term :=
  .lam .lin qubitRegisterTy <|
```

```

.unpair (.var .lin 0) <|
.lam .lin .qubit <|
.lam .lin .qubit <|
  if w = 0 then
    .pair (.app (.prim p) (.var .lin 1)) (.var .lin 0)
  else
    .pair (.var .lin 1) (.app (.prim p) (.var .lin 0))

```

### 7.2.112 Apply **cx**, restoring canonical register order in the reverse orientation

**Definition.** Apply **cx**, restoring canonical register order in the reverse orientation.

**Construction.** Defined by an explicit formula built from the qubit-register type.

**Lean 4 source** [QLambda/Linear/QuotationGeneral.lean](#)

```

def cxRegister (control target : Fin quantumSize) : Term :=
.lam .lin qubitRegisterTy <|
.unpair (.var .lin 0) <|
.lam .lin .qubit <|
.lam .lin .qubit <|
  if control = target then
    .pair (.var .lin 1) (.var .lin 0)
  else if control = 0 then
    .app (.app (.prim .cx) (.var .lin 1)) (.var .lin 0)
  else
    .unpair
      (.app (.app (.prim .cx) (.var .lin 0)) (.var .lin 1))
      (.lam .lin .qubit <|
        .lam .lin .qubit <|
          .pair (.var .lin 0) (.var .lin 1))

```

### 7.2.113 Type inference for the unary register

**Statement.** For a primitive  $p$ , an index  $w$ : if  $\text{primTy } p = \text{.arrow .lin .qubit .qubit}$ , then the type inference of  $[], []$ , the unary register of  $p$  and  $w$  equals the present value  $\text{.arrow .lin qubitRegisterTy qubitRegisterTy, []}$ .

**Proof.** By case analysis on the primitive  $p$ . The goal is simplified using the definition of the primitive type, the definition of the unary register, the definition of the qubit-register type and the definition of the type inference.

**Lean 4 source** [QLambda/Linear/QuotationGeneral.lean](#)

```

private theorem unaryRegister_infer (p : Prim)
  (hp : primTy p = .arrow .lin .qubit .qubit)
  (w : Fin quantumSize) :
infer [] [] (unaryRegister p w) =
  some (.arrow .lin qubitRegisterTy qubitRegisterTy, []) := by
cases p <|> simp [primTy] at hp
all_goals
  fin_cases w <|>
    simp [unaryRegister, qubitRegisterTy, infer, Ty.admissible,
      Ty.admissibleAt, Ty.wellScopedAt, Ty.positiveRec,

```

```
primTy, mark, zipOr]
```

### 7.2.114 Type inference for the controlled-NOT on a register

**Statement.** For indexes `control`, `target`: the type inference of `[]`, `[]`, the controlled-NOT on a register of control and target equals the present value `.arrow .lin qubitRegisterTy qubitRegisterTy, []`.

**Proof.** Every finite index is checked separately.

**Lean 4 source** `QLambda/Linear/QuotationGeneral.lean`

```
private theorem cxRegister_infer (control target : Fin quantumSize) :
  infer [] [] (cxRegister control target) =
    some (.arrow .lin qubitRegisterTy qubitRegisterTy, []) := by
  fin_cases control <|> fin_cases target <|>
  rfl
```

### 7.2.115 Closed term of the well-typedness of the any for circuit commands

**Statement.** For a term `M`, a type `A`, an unrestricted context  $\Gamma$ , a natural number `n`: if `M` has type `A` under the unrestricted context `[]` and the linear context `[]`, then `M` has type `A` under the unrestricted context  $\Gamma$  and the linear context `unused n`.

**Proof.** By induction on the unrestricted context  $\Gamma$ . For the empty context and zero, the claim is checked directly; for a context extended by one cell and a successor, the claim follows from the induction hypothesis. The goal is simplified using the fact that the unrestricted de Bruijn shift of the closed term is well typed, the definition of the unused context, the recursion equation for constant lists and the fact that the linear de Bruijn shift of the closed term is well typed.

**Lean 4 source** `QLambda/Linear/QuotationGeneral.lean`

```
private theorem closed_typed_any {M : Term} {A : Ty}
  (h : HasType [] [] M A) :
  forall (Gamma : List Ty) (n : Nat), HasType Gamma (unused n) M A := by
  have hGamma : forall Gamma : List Ty, HasType Gamma [] M A := by
    intro Gamma
    induction Gamma with
    | nil => exact h
    | cons B Gamma ih =>
      have hw := weakenUnres (C := B) ih
      simpa [shiftUnres_closed_typed h] using hw
  intro Gamma n
  induction n with
  | zero => simpa [unused] using hGamma Gamma
  | succ n ih =>
    have hw := weakenLinNone ih
    simpa [unused, List.replicate_succ, shiftLin_closed_typed h] using hw
```



### 7.2.116 The unary register is well typed

**Statement.** For a primitive  $p$ , an index  $w$ , an unrestricted context  $\Gamma$ , a natural number  $n$ : if  $\text{primTy } p = \text{.arrow .lin .qubit .qubit}$ , then  $\text{unaryRegister } p \ w$  has type  $\text{.arrow .lin qubit RegisterTy qubitRegisterTy}$  under the unrestricted context  $\Gamma$  and the linear context  $\text{unused } n$ .

**Proof.** It follows from the closed term of the well-typedness of the any for circuit commands.

**Lean 4 source** `QLambda/Linear/QuotationGeneral.lean`

```
private theorem unaryRegister_typed (p : Prim)
  (hp : primTy p = .arrow .lin .qubit .qubit)
  (w : Fin quantumSize) (Gamma : List Ty) (n : Nat) :
  HasType Gamma (unused n) (unaryRegister p w)
  (.arrow .lin qubitRegisterTy qubitRegisterTy) := by
  exact closed_typed_any (infer_sound (unaryRegister_infer p hp w)).1 Gamma n
```

### 7.2.117 The controlled-NOT on a register is well typed

**Statement.** For indexes  $\text{control}$ ,  $\text{target}$ , an unrestricted context  $\Gamma$ , a natural number  $n$ :  $\text{cxRegister control target}$  has type  $\text{.arrow .lin qubitRegisterTy qubitRegisterTy}$  under the unrestricted context  $\Gamma$  and the linear context  $\text{unused } n$ .

**Proof.** It follows from the closed term of the well-typedness of the any for circuit commands.

**Lean 4 source** `QLambda/Linear/QuotationGeneral.lean`

```
private theorem cxRegister_typed (control target : Fin quantumSize)
  (Gamma : List Ty) (n : Nat) :
  HasType Gamma (unused n) (cxRegister control target)
  (.arrow .lin qubitRegisterTy qubitRegisterTy) := by
  exact closed_typed_any (infer_sound (cxRegister_infer control target)).1 Gamma n
```

### 7.2.118 Definition of the sequential composition register of circuit commands

**Definition.** The sequential composition register of  $\text{next}$  and  $\text{body}$  is a term.

**Construction.** Defined to be the application of the lambda abstraction of a linear,  $\text{qubitRegisterTy}$ ,  $\text{body}$  and  $\text{next}$ .

**Lean 4 source** `QLambda/Linear/QuotationGeneral.lean`

```
def bindRegister (next body : Term) : Term :=
  .app (.lam .lin qubitRegisterTy body) next
```

### 7.2.119 Definition of the continue with of circuit commands

**Definition.** The continue with of  $k$ ,  $\text{current}$  and  $\text{register}$  is a term.

**Construction.** Defined to be the sequential composition register of  $\text{register}$  and the  $k$  of  $\text{current}$ .

**Lean 4 source** `QLambda/Linear/QuotationGeneral.lean`

```
def continueWith (k : Term -> Term) (current register : Term) : Term :=
  bindRegister register (k current)
```

### 7.2.120 Measurement of either wire

**Definition.** Measurement of either wire. The measurement continuation is linearly closed and returns a function waiting for the untouched wire.

**Construction.** Defined by an explicit formula built from the continue with.

**Lean 4 source** `QLambda/Linear/QuotationGeneral.lean`

```
def measureRegister (qbit : Fin quantumSize)
  (k : Term -> Term) : Term :=
  .unpair (.var .lin 0) <|
    .lam .lin .qubit <|
      .lam .lin .qubit <|
        if qbit = 0 then
          .app
            (.measure (.var .lin 1) <|
              .lam .unres .bit <|
                .lam .lin .qubit <|
                  .lam .lin .qubit <|
                    continueWith k (.var .unres 0)
                    (.pair (.var .lin 1) (.var .lin 0)))
            (.var .lin 0)
        else
          .app
            (.measure (.var .lin 0) <|
              .lam .unres .bit <|
                .lam .lin .qubit <|
                  .lam .lin .qubit <|
                    continueWith k (.var .unres 0)
                    (.pair (.var .lin 0) (.var .lin 1)))
            (.var .lin 1)
```

### 7.2.121 Definition of the quoted body of circuit commands

**Definition.** The quoted body of  $C$ ,  $current$  and  $k$  is a term.

**Construction.** Defined by cases on the input:  $.skip \mapsto$  the  $k$  of  $current$ ;  $.x\ w \mapsto$  the sequential composition register;  $.h\ w \mapsto$  the sequential composition register;  $.t\ w \mapsto$  the sequential composition register;  $.ry\ \theta\ w \mapsto$  let  $r := \text{match } \theta \text{ with}$ ;  $.rational\ r \mapsto r$ ;  $.coin\ p \mapsto$  the val of  $p$ ;  $.cx\ control\ target \mapsto$  the sequential composition register; and so on for the remaining cases.

**Lean 4 source** `QLambda/Linear/QuotationGeneral.lean`

```
def quoteBody
  (C : Command quantumSize classicalSize)
  (current : Term) (k : Term -> Term) : Term :=
  match C with
  | .skip => k current
  | .x w =>
    bindRegister
```

```

      (.app (unaryRegister .x w) (.var .lin 0)) (k current)
| .h w =>
  bindRegister
  (.app (unaryRegister .h w) (.var .lin 0)) (k current)
| .t w =>
  bindRegister
  (.app (unaryRegister .t w) (.var .lin 0)) (k current)
| .ry ? w =>
  let r := match ? with
  | .rational r => r
  | .coin p => p.val
  bindRegister
  (.app (unaryRegister (.ry r) w) (.var .lin 0)) (k current)
| .cx control target =>
  bindRegister
  (.app (cxRegister control target) (.var .lin 0)) (k current)
| .measure qbit _ => measureRegister qbit k
| .reset qbit =>
  bindRegister
  (.app (unaryRegister .reset qbit) (.var .lin 0)) (k current)
| .store _ e => k (quoteCExpr current e)
| .seq A B =>
  quoteBody A current (fun next => quoteBody B next k)
| .branch guard yes no =>
  .ite (quoteCExpr current guard)
  (quoteBody yes current k) (quoteBody no current k)

```

### 7.2.122 Definition of the well-typed continuation

**Definition.** The well-typed continuation of  $k$  is a proposition-valued predicate, defined below.

**Construction.** Defined by an explicit formula built from the term, the typing judgement, the unused context and the live register.

**Lean 4 source** [QLambda/Linear/QuotationGeneral.lean](#)

```

private def ContinuationTyped (k : Term -> Term) : Prop :=
  forall (Gamma : List Ty) (n : Nat) (current : Term),
    (forall m, HasType (.bit :: Gamma) (unused m) current .bit) ->
    HasType (.bit :: Gamma) (liveRegister n) (k current) resultTy

```

### 7.2.123 The transformed register is well typed

**Statement.** For an unrestricted context  $\Gamma$ , a natural number  $n$ , a term  $F$ : if  $F$  has type `.arrow .lin qubitRegisterTy qubitRegisterTy` under the unrestricted context  $\Gamma$  and the linear context `unused (n + 1)`, then `.app F (.var .lin 0)` has type `qubitRegisterTy` under the unrestricted context  $\Gamma$  and the linear context `liveRegister n`.

**Proof.** The claim follows directly from the definitions of the objects involved.

**Lean 4 source** [QLambda/Linear/QuotationGeneral.lean](#)

```

private theorem transformedRegister_typed
  {Gamma : List Ty} {n : Nat} {F : Term}

```

```

(hF : HasType Gamma (unused (n + 1)) F
  (.arrow .lin qubitRegisterTy qubitRegisterTy)) :
HasType Gamma (liveRegister n)
  (.app F (.var .lin 0)) qubitRegisterTy := by
exact .appL (split_live_right n) hF (typed_register_var Gamma n)

```

### 7.2.124 The sequential composition register is well typed

**Statement.** For an unrestricted context  $\Gamma$ , a natural number  $n$ , terms  $\text{next}$ ,  $\text{body}$ , a type  $A$ : under 2 hypotheses, the statement asserts a single property of the objects involved; the precise formulation is the Lean statement below.

**Proof.** The claim follows directly from the definitions of the objects involved.

#### Lean 4 source `QLambda/Linear/QuotationGeneral.lean`

```

private theorem bindRegister_typed
  {Gamma : List Ty} {n : Nat} {next body : Term} {A : Ty}
  (hbody : HasType Gamma (liveRegister (n + 1)) body A)
  (hnext : HasType Gamma (liveRegister n) next qubitRegisterTy) :
  HasType Gamma (liveRegister n) (bindRegister next body) A := by
exact .appL (split_live_right n)
  (.lamL register_admissible hbody) hnext

```

### 7.2.125 The two qubit pair well-typedness

**Statement.** For an unrestricted context  $\Gamma$ , a natural number  $n$ : `.pair (.var .lin 1) (.var .lin 0)` has type `qubitRegisterTy` under the unrestricted context  $\Gamma$  and the linear context `some .qubit`.

**Proof.** It follows from the definition of the pair and the empty usage mask of the unused context for circuit commands.

#### Lean 4 source `QLambda/Linear/QuotationGeneral.lean`

```

private theorem two_qubit_pair_typed (Gamma : List Ty) (n : Nat) :
  HasType Gamma
    (some .qubit :: some .qubit :: unused n)
    (.pair (.var .lin 1) (.var .lin 0)) qubitRegisterTy := by
apply HasType.pair
  (OSplit.right (OSplit.left (split_unused n)))
* exact .varL (.succ .zero) (allNone_unused n)
* exact .varL .zero (by
  change AllNone (none :: unused n)
  exact allNone_unused (n + 1))

```

### 7.2.126 The two qubit pair swapped well-typedness

**Statement.** For an unrestricted context  $\Gamma$ , a natural number  $n$ : `.pair (.var .lin 0) (.var .lin 1)` has type `qubitRegisterTy` under the unrestricted context  $\Gamma$  and the linear context `some .qubit`.

**Proof.** It follows from the definition of the pair and the empty usage mask of the unused context for circuit commands.

### Lean 4 source `QLambda/Linear/QuotationGeneral.lean`

```
private theorem two_qubit_pair_swapped_typed (Gamma : List Ty) (n : Nat) :
  HasType Gamma
    (some .qubit :: some .qubit :: unused n)
    (.pair (.var .lin 0) (.var .lin 1)) qubitRegisterTy := by
  apply HasType.pair
    (OSplit.left (OSplit.right (split_unused n)))
  * exact .varL .zero (by
    change AllNone (none :: unused n)
    exact allNone_unused (n + 1))
  * exact .varL (.succ .zero) (allNone_unused n)
```

#### 7.2.127 The continue with is well typed

**Statement.** For an unrestricted context  $\Gamma$ , a natural number  $n$ , a term `register`: if the continuation  $k$  is well typed and `register` has type `qubitRegisterTy` under the unrestricted context `.bit` and the linear context `some .qubit`, then `continueWith k (.var .unres 0) register` has type `resultTy` under the unrestricted context `.bit` and the linear context `some .qubit`.

**Proof.** It follows from the definition of the continue with, the hypothesis that the continuation  $k$  is well typed, the well-typedness of the bit of the variable for circuit commands and the hypothesis that `register` has type `qubitRegisterTy` under the unrestricted context `.bit` and the linear context `some .qubit`.

### Lean 4 source `QLambda/Linear/QuotationGeneral.lean`

```
private theorem continueWith_typed {k : Term -> Term}
  (hk : ContinuationTyped k) (Gamma : List Ty) (n : Nat)
  (register : Term)
  (hregister : HasType (.bit :: .bit :: Gamma)
    (some .qubit :: some .qubit :: unused n)
    register qubitRegisterTy) :
  HasType (.bit :: .bit :: Gamma)
    (some .qubit :: some .qubit :: unused n)
    (continueWith k (.var .unres 0) register) resultTy := by
  unfold continueWith
  apply HasType.appL
    (OSplit.right (OSplit.right (split_unused n)))
  * apply HasType.lamL register_admissible
    apply hk (.bit :: Gamma) (n + 2) (.var .unres 0)
    intro m
    exact typed_bit_var (.bit :: Gamma) m
  * exact hregister
```

#### 7.2.128 The register measurement is well typed

**Statement.** For an index `qbit`, an unrestricted context  $\Gamma$ , a natural number  $n$ : if the continuation  $k$  is well typed, then `measureRegister qbit k` has type `resultTy` under the unrestricted context `.bit` and the linear context `liveRegister n`.

**Proof.** The goal is simplified using standard identities for finite indices, the definition of the register measurement, the well-typedness of the register of the variable for circuit commands and the definition of the measurement.

## Lean 4 source `QLambda/Linear/QuotationGeneral.lean`

```
private theorem measureRegister_typed {k : Term -> Term}
  (hk : ContinuationTyped k) (qbit : Fin quantumSize)
  (Gamma : List Ty) (n : Nat) :
  HasType (.bit :: Gamma) (liveRegister n)
    (measureRegister qbit k) resultTy := by
  unfold measureRegister
  apply HasType.unpair (split_live_left n)
  * exact typed_register_var (.bit :: Gamma) n
  * apply HasType.lamL qubit_admissible
  apply HasType.lamL qubit_admissible
  fin_cases qbit
  * simp only [Fin.isValue]
  apply HasType.appL
    (OSplit.right (OSplit.left (split_unused (n + 1))))
  * apply HasType.measure
    (OSplit.none (OSplit.left (split_unused (n + 1))))
  * exact .varL (.succ .zero) (allNone_unused (n + 1))
  * apply HasType.lamU bit_admissible bit_duplicable
    (by
      exact allNone_unused (n + 3))
  apply HasType.lamL qubit_admissible
  apply HasType.lamL qubit_admissible
  exact continueWith_typed hk Gamma (n + 3)
    _ (two_qubit_pair_typed (.bit :: .bit :: Gamma) (n + 3))
  * exact .varL .zero (by
    change AllNone (none :: unused (n + 1))
    exact allNone_unused (n + 2))
  * simp only [Fin.isValue]
  apply HasType.appL
    (OSplit.left (OSplit.right (split_unused (n + 1))))
  * apply HasType.measure
    (OSplit.left (OSplit.none (split_unused (n + 1))))
  * exact .varL .zero (by
    change AllNone (none :: unused (n + 1))
    exact allNone_unused (n + 2))
  * apply HasType.lamU bit_admissible bit_duplicable
    (by
      exact allNone_unused (n + 3))
  apply HasType.lamL qubit_admissible
  apply HasType.lamL qubit_admissible
  exact continueWith_typed hk Gamma (n + 3)
    _ (two_qubit_pair_swapped_typed (.bit :: .bit :: Gamma) (n + 3))
  * exact .varL (.succ .zero) (allNone_unused (n + 1))
```

### 7.2.129 The quoted body is well typed

**Statement.** For a circuit command  $C$ , an unrestricted context  $\Gamma$ , a natural number  $n$ , a term `current`: if  $C$  is quotable; the continuation  $k$  is well typed; and for every  $m$ , `current` has type `.bit` under the unrestricted context `.bit` and the linear context `unused m`, then `quoteBody C current k` has type `resultTy` under the unrestricted context `.bit` and the linear context `liveRegister n`.

**Proof.** By induction on the derivation that  $C$  is quotable. For a `skip`, the Pauli-X gate, the Hadamard gate, the T gate, a Y-rotation, the controlled-NOT gate, a measurement, reset and a store, the claim is checked

directly; for a sequential composition and a branch, the claim follows from the induction hypothesis. The goal is simplified using the definition of the quoted body, the hypothesis that the continuation  $k$  is well typed, the fact that the sequential composition register is well typed and the fact that the transformed register is well typed.

#### Lean 4 source `QLambda/Linear/QuotationGeneral.lean`

```
private theorem quoteBody_typed
  {C : Command quantumSize classicalSize}
  (hC : Quotable C) {k : Term -> Term}
  (hk : ContinuationTyped k) :
  forall (Gamma : List Ty) (n : Nat) (current : Term),
    (forall m, HasType (.bit :: Gamma) (unused m) current .bit) ->
    HasType (.bit :: Gamma) (liveRegister n)
      (quoteBody C current k) resultTy := by
  induction hC generalizing k with
  | skip =>
    intro Gamma n current hcurrent
    exact hk Gamma n current hcurrent
  | x =>
    intro Gamma n current hcurrent
    apply bindRegister_typed (hk Gamma (n + 1) current hcurrent)
    apply transformedRegister_typed
    exact unaryRegister_typed .x rfl _ (.bit :: Gamma) (n + 1)
  | h =>
    intro Gamma n current hcurrent
    apply bindRegister_typed (hk Gamma (n + 1) current hcurrent)
    apply transformedRegister_typed
    exact unaryRegister_typed .h rfl _ (.bit :: Gamma) (n + 1)
  | t =>
    intro Gamma n current hcurrent
    apply bindRegister_typed (hk Gamma (n + 1) current hcurrent)
    apply transformedRegister_typed
    exact unaryRegister_typed .t rfl _ (.bit :: Gamma) (n + 1)
  | ry h? =>
    cases h? with
    | rational r =>
      intro Gamma n current hcurrent
      apply bindRegister_typed (hk Gamma (n + 1) current hcurrent)
      apply transformedRegister_typed
      exact unaryRegister_typed (.ry r) rfl _ (.bit :: Gamma) (n + 1)
  | cx hne =>
    intro Gamma n current hcurrent
    apply bindRegister_typed (hk Gamma (n + 1) current hcurrent)
    apply transformedRegister_typed
    exact cxRegister_typed _ _ (.bit :: Gamma) (n + 1)
  | measure =>
    intro Gamma n current hcurrent
    exact measureRegister_typed hk _ Gamma n
  | reset =>
    intro Gamma n current hcurrent
    apply bindRegister_typed (hk Gamma (n + 1) current hcurrent)
    apply transformedRegister_typed
    exact unaryRegister_typed .reset rfl _ (.bit :: Gamma) (n + 1)
  | store =>
    rename_i cbit e
```

```

    intro Gamma n current hcurrent
    simp [quoteBody] using
      hk Gamma n (quoteCEExpr current e)
      (fun m => quoteCEExpr_typed hcurrent e m)
| seq hA hB ihA ihB =>
  intro Gamma n current hcurrent
  apply ihA
  * intro Gamma' n' next hnext
    exact ihB hk Gamma' n' next hnext
  * exact hcurrent
| branch hy hn ihy ihn =>
  intro Gamma n current hcurrent
  apply HasType.ite (split_live_right n)
  * exact quoteCEExpr_typed hcurrent _ (n + 1)
  * exact ihy hk Gamma n current hcurrent
  * exact ihn hk Gamma n current hcurrent

```

### 7.2.130 Canonical lambda quotation with one unrestricted classical binder and two curried linear qubit binders

**Definition.** Canonical lambda quotation with one unrestricted classical binder and two curried linear qubit binders.

**Construction.** Defined by an explicit formula built from the sequential composition register and the quoted body.

**Lean 4 source** [QLambda/Linear/QuotationGeneral.lean](#)

```

def quote (C : Command quantumSize classicalSize) : Term :=
  .lam .unres .bit <|
    .lam .lin .qubit <|
      .lam .lin .qubit <|
        bindRegister
          (.pair (.var .lin 1) (.var .lin 0))
          (quoteBody C (.var .unres 0)
            (fun current => .pair (.var .lin 0) current))

```

### 7.2.131 Every command in the declared fragment has a well-typed source term

**Statement.** Every command in the declared fragment has a well-typed source term. Formally: `HasType [] [] (quote C) quotationTy`.

**Proof.** It follows from the definition of the quotation, the definition of the quotation type, the definition of the sequential composition register and the fact that the quoted body is well typed.

**Lean 4 source** [QLambda/Linear/QuotationGeneral.lean](#)

```

theorem quote_typed
  {C : Command quantumSize classicalSize} (hC : Quotable C) :
  HasType [] [] (quote C) quotationTy := by
  unfold quote quotationTy
  apply HasType.lamU bit_admissible bit_duplicable
  (show AllNone [] from trivial)
  apply HasType.lamL qubit_admissible

```



```

apply HasType.lamL qubit_admissible
unfold bindRegister
apply HasType.appL
  (OSplit.right (OSplit.right OSplit.nil))
* apply HasType.lamL register_admissible
  change HasType [.bit] (liveRegister 2)
  (quoteBody C (.var .unres 0)
    (fun current => .pair (.var .lin 0) current)) resultTy
apply quoteBody_typed hC
* intro Gamma n current hcurrent
  exact HasType.pair (split_live_left n)
    (typed_register_var (.bit :: Gamma) n) (hcurrent (n + 1))
* intro m
  exact typed_bit_var [] m
* exact two_qubit_pair_typed [.bit] 0

```

### 7.2.132 A certified canonical source quotation of a circuit command of 2 and 1

**Definition.** A certified canonical source quotation of a Command 2 1.

**Construction.** An element consists of command, subject to the laws quotable.

**Lean 4 source** [QLambda/Linear/QuotationGeneral.lean](#)

```

structure Quotation where
  command : Command quantumSize classicalSize
  quotable : Quotable command

```

### 7.2.133 Definition of the term of quotations

**Definition.** The term of Q is a term.

**Construction.** Defined to be the quotation of the circuit command of Q.

**Lean 4 source** [QLambda/Linear/QuotationGeneral.lean](#)

```

def term (Q : Quotation) : Term :=
  quote Q.command

```

### 7.2.134 Typing for quotations

**Statement.** Q.term has type quotationTy under the unrestricted context [] and the linear context [].

**Proof.** This is an instance of the fact that every command in the declared fragment has a well-typed source term.

**Lean 4 source** [QLambda/Linear/QuotationGeneral.lean](#)

```

theorem typing (Q : Quotation) :
  HasType [] [] Q.term quotationTy :=
  quote_typed Q.quotable

```

### 7.2.135 Exact extraction of the represented finite-register command

**Definition.** Exact extraction of the represented finite-register command.

**Construction.** Defined to be the circuit command of  $Q$ .

**Lean 4 source** [QLambda/Linear/QuotationGeneral.lean](#)

```
def compile (Q : Quotation) : Command quantumSize classicalSize :=
  Q.command
```

### 7.2.136 Exact command-to-canonical-source reflection

**Definition.** Exact command-to-canonical-source reflection.

**Construction.** Constructed by supplying each component of the structure explicitly.

**Lean 4 source** [QLambda/Linear/QuotationGeneral.lean](#)

```
def reflect (C : Command quantumSize classicalSize)
  (hC : Quotable C) : Quotation :=
  <C, hC>
```

### 7.2.137 Compilation of the reflection for quotations

**Statement.** For a circuit command  $C$ : if  $C$  is quotable, then  $(\text{reflect } C \text{ hC}).\text{compile} = C$ .

**Proof.** By definition. Unfolding the compilation turns the left-hand side,  $(\text{reflect } C \text{ hC}).\text{compile}$ , into the right-hand side,  $C$ ; the two sides are the same term.

**Lean 4 source** [QLambda/Linear/QuotationGeneral.lean](#)

```
@[simp] theorem compile_reflect
  (C : Command quantumSize classicalSize) (hC : Quotable C) :
  (reflect C hC).compile = C :=
  rfl
```

### 7.2.138 Reflection of the compilation of the term for quotations

**Statement.**  $(\text{reflect } Q.\text{compile } Q.\text{quotable}).\text{term}$  equals the term of  $Q$ .

**Proof.** By definition. Unfolding the term turns the left-hand side,  $(\text{reflect } Q.\text{compile } Q.\text{quotable}).\text{term}$ , into the right-hand side, the term of  $Q$ ; the two sides are the same term.

**Lean 4 source** [QLambda/Linear/QuotationGeneral.lean](#)

```
@[simp] theorem reflect_compile_term (Q : Quotation) :
  (reflect Q.compile Q.quotable).term = Q.term :=
  rfl
```

### 7.2.139 The CQ meaning is exactly that of the represented command

**Definition.** The CQ meaning is exactly that of the represented command.

**Construction.** Defined to be the denotation of `model`.

**Lean 4 source** [QLambda/Linear/QuotationGeneral.lean](#)

```
noncomputable def denote
  (model : Composer.Model quantumSize classicalSize)
  (Q : Quotation) : CQ.Sem quantumSize classicalSize :=
  Q.command.denote model
```

### 7.2.140 Compilation preserves exact CQ denotation

**Statement.** Compilation preserves exact CQ denotation. Formally:  $\text{Eq } (Q.\text{denote model}) (Q.\text{compile.denote model})$ .

**Proof.** This is an instance of the reflexivity for semantic equalities of circuits.

**Lean 4 source** [QLambda/Linear/QuotationGeneral.lean](#)

```
theorem denote_compile
  (model : Composer.Model quantumSize classicalSize) (Q : Quotation) :
  CQ.Eq (Q.denote model) (Q.compile.denote model) :=
  CQ.Eq.refl _
```

### 7.2.141 Reflection preserves exact CQ denotation

**Statement.** Reflection preserves exact CQ denotation. Formally:  $\text{Eq } ((\text{reflect } C \text{ hC}).\text{denote model}) (C.\text{denote model})$ .

**Proof.** This is an instance of the reflexivity for semantic equalities of circuits.

**Lean 4 source** [QLambda/Linear/QuotationGeneral.lean](#)

```
theorem denote_reflect
  (model : Composer.Model quantumSize classicalSize)
  (C : Command quantumSize classicalSize) (hC : Quotable C) :
  CQ.Eq ((reflect C hC).denote model) (C.denote model) :=
  CQ.Eq.refl _
```

### 7.2.142 The full capstone packages typing

**Statement.** The full capstone packages typing, exact compilation, reflection, and CQ denotation for every command in the finite fragment.

**Proof.** Each component of the claim is established separately.

**Lean 4 source** [QLambda/Linear/QuotationGeneral.lean](#)

```
theorem quotation_capstone
  (model : Composer.Model quantumSize classicalSize)
  (C : Command quantumSize classicalSize) (hC : Quotable C) :
```

```

HasType [] [] (reflect C hC).term quotationTy /\
(reflect C hC).compile = C /\
CQ.Eq ((reflect C hC).denote model) (C.denote model) := by
exact <(reflect C hC).typing, rfl, CQ.Eq.refl _>

```


## 8 Composer and OpenQASM Interchange

The target is a frozen, versioned AST with finite registers. The supported structured subset includes gates, measurement, reset, classical assignment, conditionals, switches, bounded loops, boxes, and structured loop control where the ideal semantics is defined.

Rendering produces canonical OpenQASM text. Parsing accepts exactly the declared canonical presentation and proves render/parse round trips under the `ParserCanonical` boundary. `QLambda.Palomar.openqasm_render_roundTrip` is `parseStructuredProgram_render_roundTrip`. `QLambda.Palomar.openqasm_export_roundTrip` is `parseStructuredProgram_toOpenQASM_roundTrip`. This is deliberately not a parser for arbitrary OpenQASM 3 text.


Circuit denotation is an ideal classical–quantum instrument. Sequencing is instrument bind; measurement updates a classical slot; structured control is interpreted compositionally. Barriers and delays remain syntax but are identities in the ideal semantics.

### 8.1 Theorem dependence

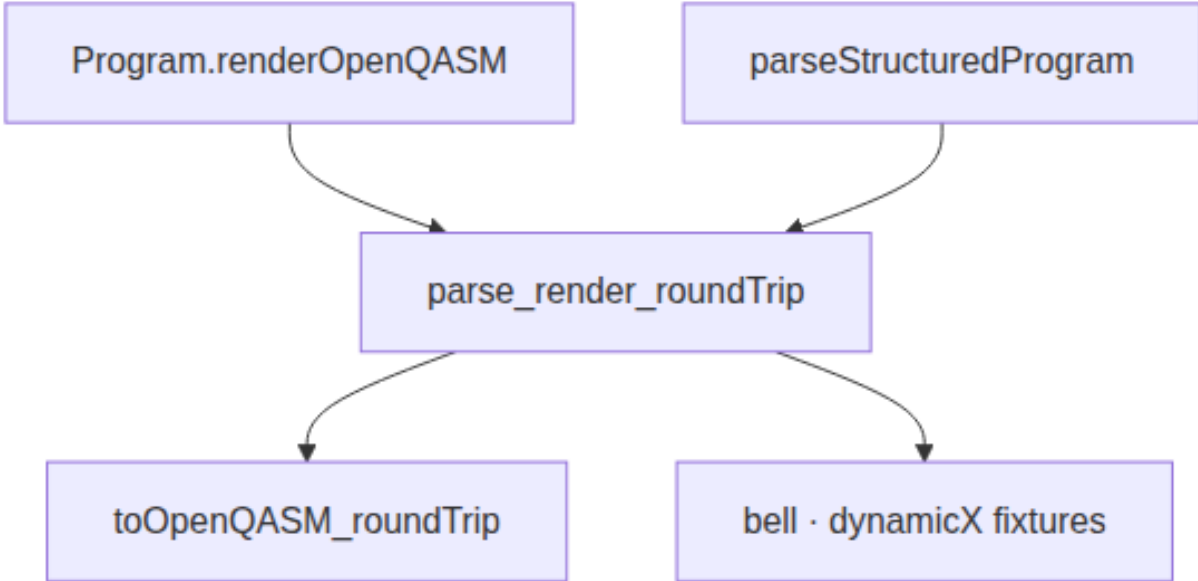

**Figure 14:** Section 8 theorem dependence: canonical OpenQASM render/parse

round trips on the declared structured subset.

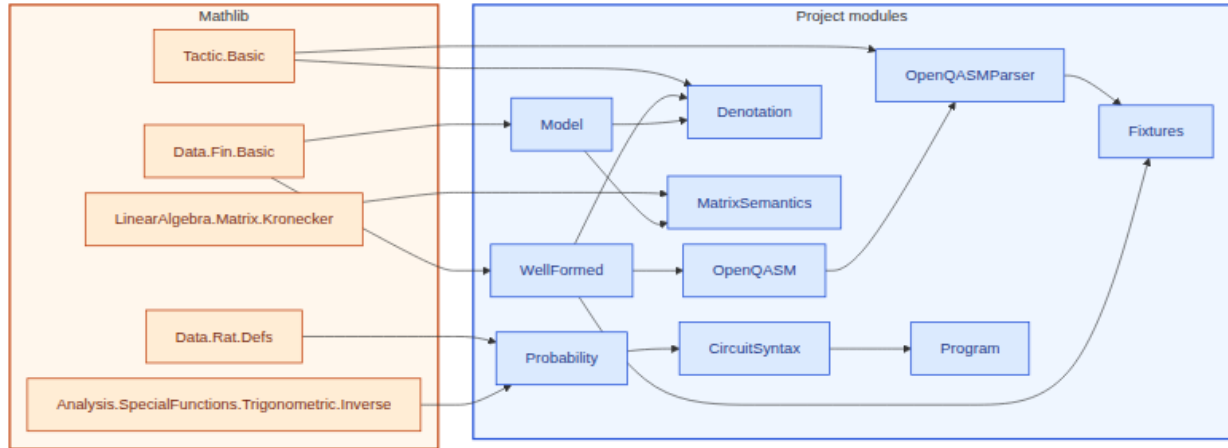

**Figure 15:** Lean module dependencies for §8 (Composer / OpenQASM). Amber box: Mathlib imports (5 listed). Blue box: project modules (10).

## 8.2 Blueprint declarations — Composer and OpenQASM interchange

*Auto-generated from the Lean sources (161 declarations). Each card states the result in mathematical English and explains the idea of its proof or construction; the Lean source follows each card.*

### 8.2.1 External syntax contract frozen for this development

**Definition.** External syntax contract frozen for this development.

**Construction.** Generated by the rules `openQASM3_0_ibmComposer_2026_09`. Every element arises from finitely many applications of these rules, so properties are proved by induction over them.

#### Lean 4 source `QLambda/Composer/CircuitSyntax.lean`

```
inductive Version where
| openQASM3_0_ibmComposer_2026_09
deriving DecidableEq, Repr
```

### 8.2.2 Classical Boolean expressions over the fixed classical register

**Definition.** Classical Boolean expressions over the fixed classical register.

**Construction.** Generated by the rules `lit`, `bit`, `not`, `and`, `or` and `xor`. Every element arises from finitely many applications of these rules, so properties are proved by induction over them.

#### Lean 4 source `QLambda/Composer/CircuitSyntax.lean`

```
inductive CExpr (c : Nat) where
| lit : Bool -> CExpr c
| bit : Fin c -> CExpr c
| not : CExpr c -> CExpr c
| and : CExpr c -> CExpr c -> CExpr c
| or : CExpr c -> CExpr c -> CExpr c
| xor : CExpr c -> CExpr c -> CExpr c
deriving DecidableEq, Repr
```

### 8.2.3 Evaluate a classical expression in a finite bit store

**Definition.** Evaluate a classical expression in a finite bit store.

**Construction.** Defined by cases on the input:  $\text{.lit } b, \_ \mapsto b$ ;  $\text{.bit } i, s \mapsto \text{the } s \text{ of } i$ ;  $\text{.not } e, s \mapsto \neg(\text{eval } e \ s)$ ;  $\text{.and } e_1 \ e_2, s \mapsto \text{eval } e_1 \ s \ \&\& \ \text{eval } e_2 \ s$ ;  $\text{.or } e_1 \ e_2, s \mapsto \text{eval } e_1 \ s \ || \ \text{eval } e_2 \ s$ ;  $\text{.xor } e_1 \ e_2, s \mapsto \text{the xor of the evaluation of } e_1 \text{ and } s \text{ and the evaluation of } e_2 \text{ and } s$ .

**Lean 4 source** [QLambda/Composer/CircuitSyntax.lean](#)

```
def eval {c : Nat} : CExpr c -> (Fin c -> Bool) -> Bool
| .lit b, _ => b
| .bit i, s => s i
| .not e, s => !(eval e s)
| .and e_1 e_2, s => eval e_1 s && eval e_2 s
| .or e_1 e_2, s => eval e_1 s || eval e_2 s
| .xor e_1 e_2, s => Bool.xor (eval e_1 s) (eval e_2 s)
```

### 8.2.4 Typed angle expressions admitted by the normalized target

**Definition.** Typed angle expressions admitted by the normalized target.

**Construction.** Generated by the rules `rational` and `coin`. Every element arises from finitely many applications of these rules, so properties are proved by induction over them.

**Lean 4 source** [QLambda/Composer/CircuitSyntax.lean](#)

```
inductive AngleExpr where
| rational : ? -> AngleExpr
/-- `2 * acos (sqrt p)`, so RY followed by Z measurement returns zero
with probability `p`. -/
| coin : Probability -> AngleExpr
deriving DecidableEq, Repr
```

### 8.2.5 Real-valued ideal interpretation of an angle expression

**Definition.** Real-valued ideal interpretation of an angle expression.

**Construction.** Defined by cases on the input:  $\text{.rational } r \mapsto r$ ;  $\text{.coin } p \mapsto \text{the product of } 2 \text{ and the arccos of } \text{Real.sqrt } p.\text{real}$ .

**Lean 4 source** [QLambda/Composer/CircuitSyntax.lean](#)

```
noncomputable def eval : AngleExpr -> ?
| .rational r => r
| .coin p => 2 * Real.arccos (Real.sqrt p.real)
```

### 8.2.6 Typed gates in the verified normalized Composer core

**Definition.** Typed gates in the verified normalized Composer core.

**Construction.** Generated by the rules `x`, `h`, `t`, `ry` and `cx`. Every element arises from finitely many applications of these rules, so properties are proved by induction over them.

### Lean 4 source `QLambda/Composer/CircuitSyntax.lean`

```
inductive Gate (q : Nat) where
| x : Fin q -> Gate q
| h : Fin q -> Gate q
| t : Fin q -> Gate q
| ry : AngleExpr -> Fin q -> Gate q
| cx : Fin q -> Fin q -> Gate q
deriving DecidableEq, Repr
```

#### 8.2.7 Rename wires while preserving gate structure

**Definition.** Rename wires while preserving gate structure.

**Construction.** Defined by cases on the input:  $.x\ w \mapsto$  the Pauli-X gate on wire the  $f$  of  $w$ ;  $.h\ w \mapsto$  the Hadamard gate on wire the  $f$  of  $w$ ;  $.t\ w \mapsto$  the T gate on wire the  $f$  of  $w$ ;  $.ry\ \theta\ w \mapsto$  the Y-rotation by angle  $\theta$  on wire the  $f$  of  $w$ ;  $.cx\ control\ target \mapsto$  the controlled-NOT gate with control the  $f$  of control and target the  $f$  of target.

### Lean 4 source `QLambda/Composer/CircuitSyntax.lean`

```
def mapWires {q q' : Nat} (f : Fin q -> Fin q') : Gate q -> Gate q'
| .x w => .x (f w)
| .h w => .h (f w)
| .t w => .t (f w)
| .ry ? w => .ry ? (f w)
| .cx control target => .cx (f control) (f target)
```

#### 8.2.8 Instructions accepted by the versioned circuit container

**Definition.** Instructions accepted by the versioned circuit container. `whileLoop` `fuel` is the statically bounded `Composer` fragment. `break` and `continue` remain representable for imported syntax but are rejected by the normalized-core well-formedness judgment.

**Construction.** Generated by the rules `gate`, `measure`, `reset`, `store`, `barrier`, `delay`, `ite`, `switch`, `forLoop`, `whileLoop`, `box` and `break`. Every element arises from finitely many applications of these rules, so properties are proved by induction over them.

### Lean 4 source `QLambda/Composer/CircuitSyntax.lean`

```
inductive Instr (q c : Nat) where
| gate : Gate q -> Instr q c
| measure : Fin q -> Fin c -> Instr q c
| reset : Fin q -> Instr q c
| store : Fin c -> CExpr c -> Instr q c
| barrier : List (Fin q) -> Instr q c
| delay : Nat -> List (Fin q) -> Instr q c
| ite : CExpr c -> List (Instr q c) -> List (Instr q c) -> Instr q c
| switch : CExpr c -> List (Bool x List (Instr q c)) -> Instr q c
| forLoop : Nat -> List (Instr q c) -> Instr q c
| whileLoop : Nat -> CExpr c -> List (Instr q c) -> Instr q c
| box : String -> List (Instr q c) -> Instr q c
| break
```

```
| continue
deriving Nonempty
```

### 8.2.9 Internal structured-control signal

**Definition.** Internal structured-control signal.

**Construction.** Generated by the rules `normal`, `break` and `continue`. Every element arises from finitely many applications of these rules, so properties are proved by induction over them.

**Lean 4 source** [QLambda/Composer/Denotation.lean](#)

```
inductive Flow where
| normal
| break
| continue
deriving DecidableEq
```

### 8.2.10 Definition of the control-flow store

**Definition.** The control-flow store of `c` is introduced by the definition below.

**Construction.** Defined to be the classical bit store of `c`, `×`, `Flow`.

**Lean 4 source** [QLambda/Composer/Denotation.lean](#)

```
abbrev FlowStore (c : Nat) := CStore c × Flow
```

### 8.2.11 Definition of the control-flow semantics

**Definition.** The control-flow semantics of `q` and `c` is introduced by the definition below.

**Construction.** Defined to be  $\text{CStore } c \rightarrow \text{FiniteInstrumentComp } (\text{QDim } q) (\text{FlowStore } c)$ .

**Lean 4 source** [QLambda/Composer/Denotation.lean](#)

```
abbrev FlowSem (q c : Nat) :=
  CStore c -> FiniteInstrumentComp (QDim q) (FlowStore c)
```

### 8.2.12 Regard an instrument as a finite computation returning its outcome index

**Definition.** Regard an instrument as a finite computation returning its outcome index.

**Construction.** Constructed interactively; an equation between variables is used to substitute one for the other.

**Lean 4 source** [QLambda/Composer/Denotation.lean](#)

```
def instrumentComp {n m outcomes : Nat} (I : QuantumInstrument n m outcomes)
  (h : n = m) : FiniteInstrumentComp n (Fin outcomes) := by
  subst m
  exact
```



```

{ Outcome := Fin outcomes
  branch := I.branch
  value := id
  trace_nonincreasing := I.trace_nonincreasing }

```

### 8.2.13 Definition of the empty control flow

**Definition.** The empty control flow is an element of  $\text{FlowSem } q \ c$ .

**Construction.** The map sending  $s$  to the unit of  $s$ ,  $\text{.normal}$ .

**Lean 4 source** [QLambda/Composer/Denotation.lean](#)

```

private def flowSkip {q c : Nat} : FlowSem q c :=
  fun s => FiniteInstrumentComp.unit (s, .normal)

```

### 8.2.14 Definition of the sequential control flow

**Definition.** The sequential control flow of  $F$  and  $G$  is an element of  $\text{FlowSem } q \ c$ .

**Construction.** The map sending  $s$  to an explicit expression in the unit.

**Lean 4 source** [QLambda/Composer/Denotation.lean](#)

```

private def flowSeq {q c : Nat} (F G : FlowSem q c) : FlowSem q c :=
  fun s => (F s).bind fun out =>
    match out.2 with
    | .normal => G out.1
    | signal => FiniteInstrumentComp.unit (out.1, signal)

```

### 8.2.15 Definition of the control-flow selection

**Definition.** The control-flow selection of  $\text{guard}$ ,  $\text{yes}$  and  $\text{no}$  is an element of  $\text{FlowSem } q \ c$ .

**Construction.** The map sending  $s$  to  $\text{if guard } s \text{ then yes } s \text{ else no } s$ .

**Lean 4 source** [QLambda/Composer/Denotation.lean](#)

```

private def flowSelect {q c : Nat} (guard : CStore c -> Bool)
  (yes no : FlowSem q c) : FlowSem q c :=
  fun s => if guard s then yes s else no s

```

### 8.2.16 Definition of the run for

**Definition.** The run for is a function of type  $\text{Nat} \rightarrow \text{FlowSem } q \ c \rightarrow \text{FlowSem } q \ c$ .

**Construction.** Defined by cases on the input:  $0, \_ \mapsto$  the empty control flow;  $n + 1, \text{body} \mapsto$   $\text{fun } s => \text{.break} \mapsto$  the unit of  $\text{out.1}$ ,  $\text{.normal}$ ;  $\text{.normal} \mid \text{.continue} \mapsto$  the run for of  $n$ ,  $\text{body}$ , the 1.

**Lean 4 source** [QLambda/Composer/Denotation.lean](#)

```

private def runFor {q c : Nat} : Nat -> FlowSem q c -> FlowSem q c
| 0, _ => flowSkip
| n + 1, body => fun s =>
  (body s).bind fun out =>
    match out.2 with
    | .break => FiniteInstrumentComp.unit (out.1, .normal)
    | .normal | .continue => runFor n body out.1

```

### 8.2.17 Definition of the run while

**Definition.** The run while is a function of type  $\text{Nat} \rightarrow (\text{CStore } c \rightarrow \text{Bool}) \rightarrow \text{FlowSem } q \ c \rightarrow \text{FlowSem } q \ c$ .

**Construction.** Defined by cases on the input:  $0, \_, \_ \mapsto$  the empty control flow;  $n + 1, \text{guard}, \text{body} \mapsto \text{fun } s \Rightarrow; .\text{break} \mapsto$  the unit of  $\text{out.1}, .\text{normal}; .\text{normal} \mid .\text{continue} \mapsto \text{runWhile } n \text{ guard body out.1}$ ;  $[] \mapsto$  the empty control flow;  $i :: \text{is} \mapsto$  the sequential control flow of the denotation flow  $\text{instr}$  of  $\text{model}$  and  $i$  and the denotation of a control-flow block of  $\text{model}$  and  $\text{is}$ ;  $.\text{gate } g \mapsto \text{fun } s \Rightarrow; .\text{measure } \text{qbit } \text{cbit} \mapsto \text{fun } s \Rightarrow;$  and so on for the remaining cases.

#### Lean 4 source `QLambda/Composer/Denotation.lean`

```

private def runWhile {q c : Nat} : Nat -> (CStore c -> Bool) -> FlowSem q c ->
  FlowSem q c
| 0, _, _ => flowSkip
| n + 1, guard, body => fun s =>
  if guard s then
    (body s).bind fun out =>
      match out.2 with
      | .break => FiniteInstrumentComp.unit (out.1, .normal)
      | .normal | .continue => runWhile n guard body out.1
  else
    FiniteInstrumentComp.unit (s, .normal)

mutual

/-- Internal denotation of a block, retaining structured-control signals. -/
noncomputable def denoteFlowBlock {q c : Nat} (model : Model q c) :
  List (Instr q c) -> FlowSem q c
| [] => flowSkip
| i :: is => flowSeq (denoteFlowInstr model i) (denoteFlowBlock model is)

/-- Internal denotation of one instruction. -/
noncomputable def denoteFlowInstr {q c : Nat} (model : Model q c) :
  Instr q c -> FlowSem q c
| .gate g => fun s =>
  FiniteInstrumentComp.ofOperation (model.gate g) (s, .normal)
| .measure qbit cbit => fun s =>
  (instrumentComp (model.measure qbit) rfl).map fun outcome =>
    (Function.update s cbit (outcome = 1), .normal)
| .reset qbit => fun s =>
  FiniteInstrumentComp.ofOperation (model.reset qbit) (s, .normal)
| .store cbit e => fun s =>
  FiniteInstrumentComp.unit (Function.update s cbit (e.eval s), .normal)

```

```

| .barrier _ => flowSkip
| .delay _ _ => flowSkip
| .ite guard yes no =>
  flowSelect (guard.eval *) (denoteFlowBlock model yes) (denoteFlowBlock model
no)
| .switch guard cases =>
  denoteFlowCases model (guard.eval *) cases
| .forLoop count body =>
  runFor count (denoteFlowBlock model body)
| .whileLoop fuel guard body =>
  runWhile fuel (guard.eval *) (denoteFlowBlock model body)
| .box _ body => denoteFlowBlock model body
| .break => fun s => FiniteInstrumentComp.unit (s, .break)
| .continue => fun s => FiniteInstrumentComp.unit (s, .continue)

/-- First matching Boolean switch case; absent case means identity. -/
noncomputable def denoteFlowCases {q c : Nat} (model : Model q c)
  (scrutinee : CStore c -> Bool) :
  List (Bool x List (Instr q c)) -> FlowSem q c
| [] => flowSkip
| branch :: rest =>
  flowSelect
    (fun s => scrutinee s == branch.1)
    (denoteFlowBlock model branch.2)
    (denoteFlowCases model scrutinee rest)

```

## 8.2.18 The meaning of a complete circuit is its CQ denotation

**Definition.** The meaning of a complete circuit is its CQ denotation.

**Construction.** Defined to be the denotation of a block of `model` and the body of `P`.

### Lean 4 source `QLambda/Composer/Denotation.lean`

```

noncomputable def Program.denote {v : Version} {q c : Nat} (model : Model q c)
  (P : Program v q c) : Sem q c :=
  denoteBlock model P.body

```

## 8.2.19 Denotation of a control-flow block of the empty list

**Statement.** For natural numbers  $q, c$ : the denotation of a control-flow block of `model` and `[]` equals the empty control flow.

**Proof.** By definition: the left-hand side, the denotation of a control-flow block of `model` and `[]`, and the right-hand side, the empty control flow, unfold to the same term.

### Lean 4 source `QLambda/Composer/Denotation.lean`

```

@[simp] theorem denoteFlowBlock_nil {q c : Nat} (model : Model q c) :
  denoteFlowBlock model [] = flowSkip :=
  rfl

```

### 8.2.20 Denotation of a control-flow block of an extended list

**Statement.** For natural numbers  $q, c$ : the denotation of a control-flow block of `model` and the `i` of `::` and `is` equals the sequential control flow of the denotation flow `instr` of `model` and `i` and the denotation of a control-flow block of `model` and `is`.

**Proof.** By definition: the left-hand side, the denotation of a control-flow block of `model` and the `i` of `::` and `is`, and the right-hand side, the sequential control flow of the denotation flow `instr` of `model` and `i` and the denotation of a control-flow block of `model` and `is`, unfold to the same term.

#### Lean 4 source `QLambda/Composer/Denotation.lean`

```
@[simp] theorem denoteFlowBlock_cons {q c : Nat} (model : Model q c)
  (i : Instr q c) (is : List (Instr q c)) :
  denoteFlowBlock model (i :: is) =
    flowSeq (denoteFlowInstr model i) (denoteFlowBlock model is) :=
  rfl
```

### 8.2.21 Denotation of a control-flow program of the for of zero

**Statement.** For natural numbers  $q, c$ : the denotation flow `instr` of `model` and the for loop of `body` at 0 equals the empty control flow.

**Proof.** By definition: the left-hand side, the denotation flow `instr` of `model` and the for loop of `body` at 0, and the right-hand side, the empty control flow, unfold to the same term.

#### Lean 4 source `QLambda/Composer/Denotation.lean`

```
@[simp] theorem denoteFlow_for_zero {q c : Nat} (model : Model q c)
  (body : List (Instr q c)) :
  denoteFlowInstr model (.forLoop 0 body) = flowSkip :=
  rfl
```

### 8.2.22 Denotation of a control-flow program of the while of zero

**Statement.** For natural numbers  $q, c$ : the denotation flow `instr` of `model` and the while loop of `guard` and `body` at 0 equals the empty control flow.

**Proof.** By definition: the left-hand side, the denotation flow `instr` of `model` and the while loop of `guard` and `body` at 0, and the right-hand side, the empty control flow, unfold to the same term.

#### Lean 4 source `QLambda/Composer/Denotation.lean`

```
@[simp] theorem denoteFlow_while_zero {q c : Nat} (model : Model q c)
  (guard : CExpr c) (body : List (Instr q c)) :
  denoteFlowInstr model (.whileLoop 0 guard body) = flowSkip :=
  rfl
```

### 8.2.23 Denotation of a block of the empty list

**Statement.** For natural numbers  $q, c$ : the denotation of a block of `model` and `[]` equals `skip`.

**Proof.** By definition: the left-hand side, the denotation of a block of `model` and `[]`, and the right-hand side, `skip`, unfold to the same term.

#### Lean 4 source `QLambda/Composer/Denotation.lean`

```
@[simp] theorem denoteBlock_nil {q c : Nat} (model : Model q c) :
  denoteBlock model [] = CQ.skip :=
  rfl
```

### 8.2.24 Denotation of a block of an extended list

**Statement.** For natural numbers `q`, `c`: the denotation of a block of `model` and the `i` of `::` and `is` equals the sequential composition of the denotation `instr` of `model` and `i` and the denotation of a block of `model` and `is`.

**Proof.** By definition: the left-hand side, the denotation of a block of `model` and the `i` of `::` and `is`, and the right-hand side, the sequential composition of the denotation `instr` of `model` and `i` and the denotation of a block of `model` and `is`, unfold to the same term.

#### Lean 4 source `QLambda/Composer/Denotation.lean`

```
@[simp] theorem denoteBlock_cons {q c : Nat} (model : Model q c)
  (i : Instr q c) (is : List (Instr q c)) :
  denoteBlock model (i :: is) =
    CQ.seq (denoteInstr model i) (denoteBlock model is) :=
  rfl
```

### 8.2.25 Definition of the Bell-state program

**Definition.** The Bell-state program is the OpenQASM program.

**Construction.** Constructed by supplying each component: `body`. The accompanying laws are verified from the definitions.

#### Lean 4 source `QLambda/Composer/Fixtures.lean`

```
def bell : Program .openQASM3_0_ibmComposer_2026_09 2 2 where
  body :=
    [ .gate (.h 0),
      .gate (.cx 0 1),
      .measure 0 0,
      .measure 1 1 ]
```

### 8.2.26 Definition of the dynamically controlled X gate

**Definition.** The dynamically controlled X gate is the OpenQASM program.

**Construction.** Constructed by supplying each component: `body`. The accompanying laws are verified from the definitions.

#### Lean 4 source `QLambda/Composer/Fixtures.lean`

```
def dynamicX : Program .openQASM3_0_ibmComposer_2026_09 1 1 where
  body :=
    [ .measure 0 0,
      .ite (.bit 0)
        [.gate (.x 0)]
        [.barrier [0]] ]
```

### 8.2.27 Well-formedness of the Bell-state program

**Statement.** `bell` is well formed. Formally: `bell.WellFormed`.

**Proof.** The goal is simplified using the definition of the well-formedness, the definition of the Bell-state program, the extended list for all-fragment unrestricted contexts and the definition of the measurement.

#### Lean 4 source `QLambda/Composer/Fixtures.lean`

```
theorem bell_wellFormed : bell.WellFormed := by
  unfold Program.WellFormed bell
  apply Block.WellFormedAt.cons
  * apply Instr.WellFormedAt.gate
    trivial
  apply Block.WellFormedAt.cons
  * apply Instr.WellFormedAt.gate
    simp [Gate.WellFormed]
  apply Block.WellFormedAt.cons
  * apply Instr.WellFormedAt.measure
  apply Block.WellFormedAt.cons
  * apply Instr.WellFormedAt.measure
  exact Block.WellFormedAt.nil
```

### 8.2.28 Example of the 1

**Statement.** The OpenQASM rendering of the Bell-state program well formed equals the concatenation of "OPENQASM 3.0;\ninclude \"stdgates.inc\";\nqubit[2] q;\nbit[2] c;\n" and "h q[0];\nCX q[0], q[1];\nnc[0] = measure q[0];\nnc[1] = measure q[1];".

**Proof.** The claim is decidable and is checked by exhaustive evaluation.

#### Lean 4 source `QLambda/Composer/Fixtures.lean`

```
example :
  bell.toOpenQASM bell_wellFormed =
    "OPENQASM 3.0;\ninclude \"stdgates.inc\";\nqubit[2] q;\nbit[2] c;\n" ++
    "h q[0];\nCX q[0], q[1];\nnc[0] = measure q[0];\nnc[1] = measure q[1];" := by
  native_decide
```

### 8.2.29 The Bell-state program OpenQASM parsing succeeds

**Statement.** `(parseFlatProgram 2 2 (bell.toOpenQASM bell_wellFormed)).isSome` evaluates to true.

**Proof.** The claim is decidable and is checked by exhaustive evaluation.

### Lean 4 source `QLambda/Composer/Fixtures.lean`

```
theorem bell_openQASM_parse_succeeds :  
  (parseFlatProgram 2 2 (bell.toOpenQASM bell_wellFormed)).isSome = true := by  
  native_decide
```

### 8.2.30 Well-formedness of the dynamically controlled X gate

**Statement.** `dynamicX` is well formed. Formally: `dynamicX.WellFormed`.

**Proof.** The goal is simplified using the definition of the well-formedness, the definition of the dynamically controlled X gate and the extended list for all-fragment unrestricted contexts.

### Lean 4 source `QLambda/Composer/Fixtures.lean`

```
theorem dynamicX_wellFormed : dynamicX.WellFormed := by  
  unfold Program.WellFormed dynamicX  
  apply Block.WellFormedAt.cons  
  * exact .measure  
  apply Block.WellFormedAt.cons  
  * apply Instr.WellFormedAt.ite  
    * exact .cons (.gate trivial) .nil  
    * exact .cons (.barrier (by simp)) .nil  
  exact .nil
```

### 8.2.31 The dynamically controlled X gate OpenQASM parsing succeeds

**Statement.** An explicit expression in the parser for structured programs, the OpenQASM rendering and the dynamic x well formed equals `true`.

**Proof.** The claim is decidable and is checked by exhaustive evaluation.

### Lean 4 source `QLambda/Composer/Fixtures.lean`

```
theorem dynamicX_openQASM_parse_succeeds :  
  (parseStructuredProgram 1 1  
    (dynamicX.toOpenQASM dynamicX_wellFormed)).isSome = true := by  
  native_decide
```

### 8.2.32 Computational-basis bit strings, with wire zero the least-significant bit

**Definition.** Computational-basis bit strings, with wire zero the least-significant bit.

**Construction.** Defined to be the finite index of  $q, \rightarrow, \text{Bool}$ .

### Lean 4 source `QLambda/Composer/MatrixSemantics.lean`

```
abbrev BasisBits (q : Nat) := Fin q -> Bool
```

### 8.2.33 Decode a basis index into its little-endian bit string

**Definition.** Decode a basis index into its little-endian bit string.

**Construction.** The map sending  $w$  to the test bit of the val of  $w$ .

**Lean 4 source** [QLambda/Composer/MatrixSemantics.lean](#)

```
def basisBits {q : Nat} (i : Fin (CQ.QDim q)) : BasisBits q :=
  fun w => i.val.testBit w.val
```

### 8.2.34 Encode a little-endian bit string as a basis index

**Definition.** Encode a little-endian bit string as a basis index.

**Construction.** Constructed by supplying each component of the structure explicitly.

**Lean 4 source** [QLambda/Composer/MatrixSemantics.lean](#)

```
def basisIndex {q : Nat} (x : BasisBits q) : Fin (CQ.QDim q) :=
  <Nat.ofBits x, Nat.ofBits_lt_two_pow x>
```

### 8.2.35 Basis bits of a basis index

**Statement.** For a natural number  $q$ : the basis bits of the basis index of  $x$  equals  $x$ .

**Proof.** Both sides are compared pointwise (by extensionality). It follows from standard identities for natural numbers.

**Lean 4 source** [QLambda/Composer/MatrixSemantics.lean](#)

```
@[simp] theorem basisBits_basisIndex {q : Nat} (x : BasisBits q) :
  basisBits (basisIndex x) = x := by
  funext w
  exact Nat.testBit_ofBits_lt x w.val w.isLt
```

### 8.2.36 Basis index of a basis bits

**Statement.** For a natural number  $q$ , an index  $i$ : the basis index of the basis bits of  $i$  equals  $i$ .

**Proof.** Both sides are compared pointwise (by extensionality). The key step rewrites with standard identities for natural numbers and the extensionality for bilinear maps.

**Lean 4 source** [QLambda/Composer/MatrixSemantics.lean](#)

```
@[simp] theorem basisIndex_basisBits {q : Nat} (i : Fin (CQ.QDim q)) :
  basisIndex (basisBits i) = i := by
  apply Fin.ext
  change Nat.ofBits (fun w : Fin q => i.val.testBit w.val) = i.val
  rw [Nat.ofBits_testBit]
  exact Nat.mod_eq_of_lt i.isLt
```



### 8.2.37 The canonical equivalence between integer and bit-string basis labels

**Definition.** The canonical equivalence between integer and bit-string basis labels.

**Construction.** Constructed by supplying each component: passage to fun, inverse fun, left inverse and right inverse. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Composer/MatrixSemantics.lean](#)

```
def basisEquiv (q : Nat) : Fin (CQ.QDim q) ? BasisBits q where
  toFun := basisBits
  invFun := basisIndex
  left_inv := basisIndex_basisBits
  right_inv := basisBits_basisIndex
```

### 8.2.38 All wires other than w

**Definition.** All wires other than w.

**Construction.** Constructed by supplying each component of the structure explicitly.

**Lean 4 source** [QLambda/Composer/MatrixSemantics.lean](#)

```
abbrev OtherBits {q : Nat} (w : Fin q) := {v : Fin q // v != w} -> Bool
```

### 8.2.39 Split one selected wire from a computational-basis bit string

**Definition.** Split one selected wire from a computational-basis bit string.

**Construction.** Constructed by supplying each component of the structure explicitly.

**Lean 4 source** [QLambda/Composer/MatrixSemantics.lean](#)

```
def splitWire {q : Nat} (w : Fin q) : BasisBits q ? Bool x OtherBits w where
  toFun x := (x w, fun v => x v.1)
  invFun p v := if h : v = w then p.1 else p.2 <v, h>
  left_inv x := by
    funext v
    by_cases h : v = w
    * subst v
    * simp
    * simp [h]
  right_inv p := by
    apply Prod.ext
    * simp
    * funext v
    simp [v.2]
```

### 8.2.40 Split a selected wire directly from the integer basis label

**Definition.** Split a selected wire directly from the integer basis label.

**Construction.** Defined to be `(basisEquiv q).trans (splitWire w)`.

**Lean 4 source** [QLambda/Composer/MatrixSemantics.lean](#)

```
def registerSplit {q : Nat} (w : Fin q) :
  Fin (CQ.QDim q) ? Bool x OtherBits w :=
  (basisEquiv q).trans (splitWire w)
```

#### 8.2.41 All wires other than two distinct selected wires

**Definition.** All wires other than two distinct selected wires.

**Construction.** Constructed by supplying each component of the structure explicitly.

**Lean 4 source** [QLambda/Composer/MatrixSemantics.lean](#)

```
abbrev OtherBits_2 {q : Nat} (control target : Fin q) :=
  {v : Fin q // v != control /\ v != target} -> Bool
```

#### 8.2.42 Split two distinct wires from a computational-basis bit string

**Definition.** Split two distinct wires from a computational-basis bit string.

**Construction.** Constructed by supplying each component of the structure explicitly.

**Lean 4 source** [QLambda/Composer/MatrixSemantics.lean](#)

```
def splitWires {q : Nat} (control target : Fin q) (hne : control != target) :
  BasisBits q ? (Bool x Bool) x OtherBits_2 control target where
  toFun x := ((x control, x target), fun v => x v.1)
  invFun p v :=
    if hc : v = control then p.1.1
    else if ht : v = target then p.1.2
    else p.2 <v, hc, ht>
  left_inv x := by
    funext v
    by_cases hc : v = control
    * subst v
      simp
    * by_cases ht : v = target
      * subst v
        simp [hc]
      * simp [hc, ht]
  right_inv p := by
    apply Prod.ext
    * apply Prod.ext
      * simp
      * simp [Ne.symm hne]
    * funext v
      simp [v.2.1, v.2.2]
```

#### 8.2.43 Split two distinct wires directly from the integer basis label

**Definition.** Split two distinct wires directly from the integer basis label.

**Construction.** Defined to be `(basisEquiv q).trans (splitWires control target hne)`.

#### Lean 4 source `QLambda/Composer/MatrixSemantics.lean`

```
def registerSplit_2 {q : Nat} (control target : Fin q) (hne : control != target) :  
  Fin (CQ.QDim q) → (Bool × Bool) × OtherBits_2 control target :=  
  (basisEquiv q).trans (splitWires control target hne)
```

#### 8.2.44 Definition of the single-qubit matrix

**Definition.** The single-qubit matrix is introduced by the definition below.

**Construction.** Defined to be the matrix of `Bool, Bool, ℂ`.

#### Lean 4 source `QLambda/Composer/MatrixSemantics.lean`

```
abbrev QubitMatrix := Matrix Bool Bool ?
```

#### 8.2.45 Pauli X in the Boolean computational basis

**Definition.** Pauli X in the Boolean computational basis.

**Construction.** The map sending  $i \ j$  to if  $i = !j$  then 1 else 0.

#### Lean 4 source `QLambda/Composer/MatrixSemantics.lean`

```
def x_2 : QubitMatrix :=  
  fun i j => if i = !j then 1 else 0
```

#### 8.2.46 Hadamard in the Boolean computational basis

**Definition.** Hadamard in the Boolean computational basis.

**Construction.** Defined to be the square root of  $\frac{1}{2}$  at 2, 2.

#### Lean 4 source `QLambda/Composer/MatrixSemantics.lean`

```
noncomputable def sqrtTwoHalf : ? :=  
  Real.sqrt 2 / 2
```

#### 8.2.47 Definition of the $2 \times 2$ matrix of the Hadamard gate

**Definition.** The  $2 \times 2$  matrix of the Hadamard gate is an element of `QubitMatrix`.

**Construction.** The map sending  $i \ j$  to if  $i \ \&\& \ j$  then  $-\text{sqrtTwoHalf}$  else  $\text{sqrtTwoHalf}$ .

#### Lean 4 source `QLambda/Composer/MatrixSemantics.lean`

```
noncomputable def h_2 : QubitMatrix :=  
  fun i j => if i && j then -sqrtTwoHalf else sqrtTwoHalf
```

### 8.2.48 Primitive eighth root of unity used by the $T$ gate

**Definition.** Primitive eighth root of unity used by the  $T$  gate.

**Construction.** Defined to be the sum of the value one over the square root of two and the product of the value one over the square root of two and the  $i$ .

**Lean 4 source** [QLambda/Composer/MatrixSemantics.lean](#)

```
noncomputable def tPhase : ? :=  
  sqrtTwoHalf + sqrtTwoHalf * Complex.I
```

### 8.2.49 The $T = \text{diag}(1, \exp(i\pi/4))$ phase gate

**Definition.** The  $T = \text{diag}(1, \exp(i\pi/4))$  phase gate.

**Construction.** The map sending  $i \ j$  to  $\text{if } i = j \text{ then if } i \text{ then } tPhase \text{ else } 1 \text{ else } 0$ .

**Lean 4 source** [QLambda/Composer/MatrixSemantics.lean](#)

```
noncomputable def t_2 : QubitMatrix :=  
  fun i j => if i = j then if i then tPhase else 1 else 0
```

### 8.2.50 Definition of the cosine of the half angle

**Definition.** The cosine of the half angle of  $\theta$  is a complex number.

**Construction.** Defined to be the  $\cos$  of  $\theta / 2$ ,  $:\mathbb{R}$ .

**Lean 4 source** [QLambda/Composer/MatrixSemantics.lean](#)

```
noncomputable def cosHalf (? : ?) : ? :=  
  (Real.cos (? / 2) : ?)
```

### 8.2.51 Definition of the sine of the half angle

**Definition.** The sine of the half angle of  $\theta$  is a complex number.

**Construction.** Defined to be the  $\sin$  of  $\theta / 2$ ,  $:\mathbb{R}$ .

**Lean 4 source** [QLambda/Composer/MatrixSemantics.lean](#)

```
noncomputable def sinHalf (? : ?) : ? :=  
  (Real.sin (? / 2) : ?)
```

### 8.2.52 Defining equation of the cosine of the half angle

**Statement.** For a real number  $\theta$ : the cosine of the half angle of  $\theta$  equals the  $\cos$  of  $\theta / 2$ ,  $:\mathbb{R}$ .

**Proof.** By definition. Unfolding the cosine of the half angle turns the left-hand side, the cosine of the half angle of  $\theta$ , into the right-hand side, the  $\cos$  of  $\theta / 2$ ,  $:\mathbb{R}$ ; the two sides are the same term.

**Lean 4 source** [QLambda/Composer/MatrixSemantics.lean](#)

```
@[simp] theorem cosHalf_def (? : ?) :
  cosHalf ? = (Real.cos (? / 2) : ?) :=
  rfl
```

### 8.2.53 Defining equation of the sine of the half angle

**Statement.** For a real number  $\theta$ : the sine of the half angle of  $\theta$  equals the sin of  $\theta / 2$ ,  $., \mathbb{R}$ .

**Proof.** By definition. Unfolding the sine of the half angle turns the left-hand side, the sine of the half angle of  $\theta$ , into the right-hand side, the sin of  $\theta / 2$ ,  $., \mathbb{R}$ ; the two sides are the same term.

**Lean 4 source** [QLambda/Composer/MatrixSemantics.lean](#)

```
@[simp] theorem sinHalf_def (? : ?) :
  sinHalf ? = (Real.sin (? / 2) : ?) :=
  rfl
```

### 8.2.54 Rotation about the Y axis in the Boolean computational basis

**Definition.** Rotation about the Y axis in the Boolean computational basis.

**Construction.** The map sending  $i \ j$  to an explicit expression in the cosine of the half angle and the sine of the half angle.

**Lean 4 source** [QLambda/Composer/MatrixSemantics.lean](#)

```
noncomputable def ry_2 (? : ?) : QubitMatrix :=
  fun i j =>
    match i, j with
    | false, false => cosHalf ?
    | false, true  => -sinHalf ?
    | true,  false => sinHalf ?
    | true,  true  => cosHalf ?
```

### 8.2.55 Computational-basis projector on one Boolean qubit

**Definition.** Computational-basis projector on one Boolean qubit.

**Construction.** The map sending  $i \ j$  to  $\text{if } i = b \wedge j = b \text{ then } 1 \text{ else } 0$ .

**Lean 4 source** [QLambda/Composer/MatrixSemantics.lean](#)

```
def proj_2 (b : Bool) : QubitMatrix :=
  fun i j => if i = b /\ j = b then 1 else 0
```

### 8.2.56 The reset Kraus operator $|0\rangle\langle b|$

**Definition.** The reset Kraus operator  $|0\rangle\langle b|$ .

**Construction.** The map sending  $i \ j$  to  $\text{if } i = \text{false} \wedge j = b \text{ then } 1 \text{ else } 0$ .

**Lean 4 source** [QLambda/Composer/MatrixSemantics.lean](#)

```
def reset_2 (b : Bool) : QubitMatrix :=
  fun i j => if i = false /\ j = b then 1 else 0
```

### 8.2.57 Controlled X on two Boolean coordinates (control, target)

**Definition.** Controlled X on two Boolean coordinates (control, target).

**Construction.** The map sending  $i\ j$  to  $\text{if } i = (j.1, \text{Bool.xor } j.2\ j.1) \text{ then } 1 \text{ else } 0$ .

**Lean 4 source** [QLambda/Composer/MatrixSemantics.lean](#)

```
def cx? : Matrix (Bool x Bool) (Bool x Bool) ? :=
  fun i j => if i = (j.1, Bool.xor j.2 j.1) then 1 else 0
```

### 8.2.58 The $2 \times 2$ matrix of the Pauli-X gate is an isometry

**Statement.** The product of  $x_2^H$  and  $x_2$  equals 1. Formally:  $x_2^\dagger * x_2 = 1$ .

**Proof.** Both sides are compared pointwise (by extensionality). The hypotheses are unpacked into their constituent data. The goal is simplified using standard identities for matrices.

**Lean 4 source** [QLambda/Composer/MatrixSemantics.lean](#)

```
theorem x_2_isometry : x_2? * x_2 = 1 := by
  ext i j
  cases i <;> cases j <;> simp [x_2, Matrix.mul_apply]
```

### 8.2.59 Value one over the square root of two of the square

**Statement.** The product of the value one over the square root of two and the value one over the square root of two equals  $1 / 2$ .

**Proof.** It follows from the definition of the value one over the square root of two, the usual algebraic identities, standard identities for complex numbers and standard identities for real numbers. The remaining numerical facts are checked by direct computation.

**Lean 4 source** [QLambda/Composer/MatrixSemantics.lean](#)

```
private theorem sqrtTwoHalf_sq :
  sqrtTwoHalf * sqrtTwoHalf = (1 / 2 : ?) := by
  norm_num [sqrtTwoHalf, div_mul_div_comm, <- Complex.ofReal_mul,
    Real.mul_self_sqrt]
```

### 8.2.60 Adjoint of a value one over the square root of two

**Statement.** The adjoint of the value one over the square root of two equals the value one over the square root of two. Formally:  $\text{star } \text{sqrtTwoHalf} = \text{sqrtTwoHalf}$ .

**Proof.** The goal is simplified using the definition of the value one over the square root of two.

**Lean 4 source** [QLambda/Composer/MatrixSemantics.lean](#)

```
@[simp] private theorem star_sqrtTwoHalf : star sqrtTwoHalf = sqrtTwoHalf := by
  simp [sqrtTwoHalf]
```

### 8.2.61 Adjoint of the T-gate phase of a product of the T-gate phase

**Statement.** The product of the adjoint of  $tPhase$  and the T-gate phase equals 1.

**Proof.** The key step rewrites with the definition of the T-gate phase, the usual algebraic identities and standard identities for complex numbers. The remaining numerical facts are checked by direct computation.

**Lean 4 source** [QLambda/Composer/MatrixSemantics.lean](#)

```
@[simp] theorem star_tPhase_mul_tPhase : star tPhase * tPhase = 1 := by
  have hstar : star tPhase =
    sqrtTwoHalf - sqrtTwoHalf * Complex.I := by
    simp [tPhase]
  ring
  rw [hstar]
  simp only [tPhase]
  ring_nf
  have hs : sqrtTwoHalf ^ 2 = (1 / 2 : ?) := by
    simp [pow_two] using sqrtTwoHalf_sq
  rw [hs, Complex.I_sq]
  norm_num
```

### 8.2.62 Adjoint of a cosine of the half angle

**Statement.** For a real number  $\theta$ : the adjoint of the cosine of the half angle of  $\theta$  equals the cosine of the half angle of  $\theta$ .

**Proof.** It follows from standard identities for complex numbers.

**Lean 4 source** [QLambda/Composer/MatrixSemantics.lean](#)

```
@[simp] private theorem star_cosHalf (? : ?) : star (cosHalf ?) = cosHalf ? := by
  exact Complex.conj_ofReal _
```

### 8.2.63 Adjoint of a sine of the half angle

**Statement.** For a real number  $\theta$ : the adjoint of the sine of the half angle of  $\theta$  equals the sine of the half angle of  $\theta$ .

**Proof.** It follows from standard identities for complex numbers.

**Lean 4 source** [QLambda/Composer/MatrixSemantics.lean](#)

```
@[simp] private theorem star_sinHalf (? : ?) : star (sinHalf ?) = sinHalf ? := by
  exact Complex.conj_ofReal _
```

### 8.2.64 The $2 \times 2$ matrix of the Hadamard gate is an isometry

**Statement.** The product of  $h_2^H$  and  $h_2$  equals 1. Formally:  $h_2^\dagger * h_2 = 1$ .

**Proof.** Both sides are compared pointwise (by extensionality). The hypotheses are unpacked into their constituent data. The key step rewrites with standard identities for matrices, standard identities for finite types, standard identities for Booleans and the usual algebraic identities. The remaining numerical facts are checked by direct computation.

**Lean 4 source** `QLambda/Composer/MatrixSemantics.lean`

```
theorem h_2_isometry : h_2? * h_2 = 1 := by
  ext i j
  cases i <|> cases j <|>
    simp only [Matrix.mul_apply, conjTranspose_apply, h_2] <|>
    rw [Fintype.sum_bool] <|>
    simp only [Bool.false_and, Bool.true_and, Bool.false_eq_true,
      Bool.true_eq_false, one_apply, reduceIte, star_sqrtTwoHalf]
  *
  repeat rw [sqrtTwoHalf_sq]
  norm_num
  *
  simp
  *
  simp
  *
  rw [star_neg, star_sqrtTwoHalf, neg_mul]
  simp only [mul_neg, neg_neg]
  repeat rw [sqrtTwoHalf_sq]
  norm_num
```

### 8.2.65 The $2 \times 2$ matrix of the T gate is an isometry

**Statement.** The product of  $t_2^H$  and  $t_2$  equals 1. Formally:  $t_2^\dagger * t_2 = 1$ .

**Proof.** Both sides are compared pointwise (by extensionality). The hypotheses are unpacked into their constituent data. The goal is simplified using standard identities for matrices and the adjoint of the T-gate phase of a product of the T-gate phase.

**Lean 4 source** `QLambda/Composer/MatrixSemantics.lean`

```
theorem t_2_isometry : t_2? * t_2 = 1 := by
  ext i j
  cases i <|> cases j <|>
    simp [t_2, Matrix.mul_apply]
  change star tPhase * tPhase = 1
  exact star_tPhase_mul_tPhase
```

### 8.2.66 The $2 \times 2$ matrix of the Y-rotation gate is an isometry

**Statement.** For a real number  $\theta$ : the product of  $(r_{Y2} \ \theta)^\dagger$  and the  $2 \times 2$  matrix of the Y-rotation gate of  $\theta$  equals 1.



**Proof.** Both sides are compared pointwise (by extensionality). The hypotheses are unpacked into their constituent data. The key step rewrites with the definition of the sine of the half angle, the definition of the cosine of the half angle, the usual algebraic identities and standard identities for matrices.

**Lean 4 source** [QLambda/Composer/MatrixSemantics.lean](#)

```
theorem ry_2_isometry (? : ?) : (ry_2 ?)? * ry_2 ? = 1 := by
  have htrig :
    sinHalf ? * sinHalf ? + cosHalf ? * cosHalf ? = 1 := by
      simp only [sinHalf, cosHalf]
      exact_mod_cast (by
        simp [pow_two] using Real.sin_sq_add_cos_sq (? / 2))
  ext i j
  cases i <|> cases j <|>
  simp only [Matrix.mul_apply, conjTranspose_apply, ry_2] <|>
  rw [Fintype.sum_bool] <|>
  simp only [one_apply, reduceIte, star_neg, star_cosHalf, star_sinHalf,
    neg_mul, mul_neg, neg_neg, Bool.false_eq_true, Bool.true_eq_false]
  *
  simp only [add_comm] using htrig
  *
  ring
  *
  ring
  *
  simp [add_comm] using htrig
```

### 8.2.67 The $4 \times 4$ matrix of the controlled-NOT gate is an isometry

**Statement.** The product of  $c_{x_4}^H$  and  $c_{x_4}$  equals 1. Formally:  $c_{x_4}^\dagger * c_{x_4} = 1$ .

**Proof.** By case analysis on  $i$ . The goal is simplified using the definition of the  $4 \times 4$  matrix of the controlled-NOT gate and standard identities for matrices.

**Lean 4 source** [QLambda/Composer/MatrixSemantics.lean](#)

```
theorem cx?_isometry : cx?? * cx? = 1 := by
  ext i j
  rcases i with <i_1, i_2>
  rcases j with <j_1, j_2>
  cases i_1 <|> cases i_2 <|> cases j_1 <|> cases j_2 <|>
  simp [cx?, Matrix.mul_apply]
```

### 8.2.68 $2 \times 2$ matrix of the projection of a conjugate transpose

**Statement.** For a bit  $b$ :  $(\text{proj}_2 \ b)^\dagger$  equals the  $2 \times 2$  matrix of the projection of  $b$ .

**Proof.** Both sides are compared pointwise (by extensionality). The hypotheses are unpacked into their constituent data. The goal is simplified using the definition of the  $2 \times 2$  matrix of the projection.

**Lean 4 source** [QLambda/Composer/MatrixSemantics.lean](#)

```
@[simp] theorem proj_2_conjTranspose (b : Bool) : (proj_2 b)? = proj_2 b := by
  ext i j
  cases i <|> cases j <|> cases b <|> simp [proj_2, conjTranspose]
```

### 8.2.69 The $2 \times 2$ matrix of the projection is idempotent

**Statement.** For a bit  $b$ : the product of the  $2 \times 2$  matrix of the projection of  $b$  and the  $2 \times 2$  matrix of the projection of  $b$  equals the  $2 \times 2$  matrix of the projection of  $b$ .

**Proof.** Both sides are compared pointwise (by extensionality). The hypotheses are unpacked into their constituent data. The goal is simplified using the definition of the  $2 \times 2$  matrix of the projection and standard identities for matrices.

**Lean 4 source** `QLambda/Composer/MatrixSemantics.lean`

```
@[simp] theorem proj_2_mul_self (b : Bool) : proj_2 b * proj_2 b = proj_2 b := by
  ext i j
  cases i <|> cases j <|> cases b <|> simp [proj_2, Matrix.mul_apply]
```

### 8.2.70 Completeness of the $2 \times 2$ matrix of the projection

**Statement.** The sum of the  $2 \times 2$  matrix of the projection of `false` and the  $2 \times 2$  matrix of the projection of `true` equals 1.

**Proof.** Both sides are compared pointwise (by extensionality). The hypotheses are unpacked into their constituent data. The goal is simplified using the definition of the  $2 \times 2$  matrix of the projection.

**Lean 4 source** `QLambda/Composer/MatrixSemantics.lean`

```
theorem proj_2_completeness : proj_2 false + proj_2 true = (1 : QubitMatrix) := by
  ext i j
  cases i <|> cases j <|> simp [proj_2]
```

### 8.2.71 Completeness of the $2 \times 2$ matrix of the reset

**Statement.** The sum of the product of  $(\text{reset}_2 \text{ false})^\dagger$  and the  $2 \times 2$  matrix of the reset of `false` and the product of  $(\text{reset}_2 \text{ true})^\dagger$  and the  $2 \times 2$  matrix of the reset of `true` equals 1.

**Proof.** Both sides are compared pointwise (by extensionality). The hypotheses are unpacked into their constituent data. The goal is simplified using the definition of the  $2 \times 2$  matrix of the reset and standard identities for matrices.

**Lean 4 source** `QLambda/Composer/MatrixSemantics.lean`

```
theorem reset_2_completeness :
  (reset_2 false)? * reset_2 false + (reset_2 true)? * reset_2 true =
  (1 : QubitMatrix) := by
  ext i j
  cases i <|> cases j <|> simp [reset_2, Matrix.mul_apply]
```

### 8.2.72 Put a one-qubit matrix on an arbitrary register wire

**Definition.** Put a one-qubit matrix on an arbitrary register wire.

**Construction.** Defined to be the reindexing alg equivalence.

**Lean 4 source** `QLambda/Composer/MatrixSemantics.lean`

```

noncomputable def onWire {q : Nat} (w : Fin q) (U : QubitMatrix) :
  KrausOperator (CQ.QDim q) (CQ.QDim q) :=
  Matrix.reindexAlgEquiv ? ? (registerSplit w).symm
  (U ?? (1 : Matrix (OtherBits w) (OtherBits w) ?))

```

### 8.2.73 Action on a single wire of a conjugate transpose

**Statement.** For a natural number  $q$ , an index  $w$ :  $(\text{onWire } w \ U)^\dagger$  equals the action on a single wire of  $w$  and  $U^H$ .

**Proof.** The key step rewrites with standard identities for matrices and the usual algebraic identities.

#### Lean 4 source `QLambda/Composer/MatrixSemantics.lean`

```

@[simp] theorem onWire_conjTranspose {q : Nat} (w : Fin q) (U : QubitMatrix) :
  (onWire w U)? = onWire w U? := by
  change
  (Matrix.reindex (registerSplit w).symm (registerSplit w).symm
    (U ?? (1 : Matrix (OtherBits w) (OtherBits w) ?)))? =
  Matrix.reindex (registerSplit w).symm (registerSplit w).symm
    (U? ?? (1 : Matrix (OtherBits w) (OtherBits w) ?))
  rw [Matrix.conjTranspose_reindex,
    Matrix.conjTranspose_kronecker, conjTranspose_one]

```

### 8.2.74 Action on a single wire of a product

**Statement.** For a natural number  $q$ , an index  $w$ : the product of the action on a single wire of  $w$  and  $U$  and the action on a single wire of  $w$  and  $V$  equals the action on a single wire of  $w$  and the product of  $U$  and  $V$ .

**Proof.** The key step rewrites with the definition of the action on a single wire, the usual algebraic identities and standard identities for matrices.

#### Lean 4 source `QLambda/Composer/MatrixSemantics.lean`

```

@[simp] theorem onWire_mul {q : Nat} (w : Fin q) (U V : QubitMatrix) :
  onWire w U * onWire w V = onWire w (U * V) := by
  classical
  rw [onWire, onWire, onWire, <- map_mul,
    <- Matrix.mul_kronecker_mul, Matrix.one_mul]

```

### 8.2.75 Action on a single wire of a sum

**Statement.** For a natural number  $q$ , an index  $w$ : the sum of the action on a single wire of  $w$  and  $U$  and the action on a single wire of  $w$  and  $V$  equals the action on a single wire of  $w$  and the sum of  $U$  and  $V$ .

**Proof.** The key step rewrites with the definition of the action on a single wire, the usual algebraic identities and standard identities for matrices.

#### Lean 4 source `QLambda/Composer/MatrixSemantics.lean`

```

@[simp] theorem onWire_add {q : Nat} (w : Fin q) (U V : QubitMatrix) :
  onWire w U + onWire w V = onWire w (U + V) := by
  classical
  rw [onWire, onWire, onWire, <- map_add, Matrix.add_kronecker]

```

### 8.2.76 Action on a single wire of one

**Statement.** For a natural number  $q$ , an index  $w$ : the action on a single wire of  $w$  at 1 equals 1.

**Proof.** The key step rewrites with the definition of the action on a single wire, standard identities for matrices and the usual algebraic identities.

**Lean 4 source** `QLambda/Composer/MatrixSemantics.lean`

```
@[simp] theorem onWire_one {q : Nat} (w : Fin q) :
  onWire w (1 : QubitMatrix) = 1 := by
  classical
  rw [onWire, Matrix.one_kronecker_one]
  exact map_one (Matrix.reindexAlgEquiv ? ? (registerSplit w).symm)
```

### 8.2.77 Put a two-qubit matrix on two distinct arbitrary register wires

**Definition.** Put a two-qubit matrix on two distinct arbitrary register wires.

**Construction.** Defined to be the reindexing alg equivalence.

**Lean 4 source** `QLambda/Composer/MatrixSemantics.lean`

```
noncomputable def onWires {q : Nat} (control target : Fin q)
  (hne : control != target) (U : Matrix (Bool x Bool) (Bool x Bool) ?) :
  KrausOperator (CQ.QDim q) (CQ.QDim q) :=
  Matrix.reindexAlgEquiv ? ? (registerSplit_2 control target hne).symm
  (U ?? (1 : Matrix (OtherBits_2 control target) (OtherBits_2 control target) ?))
```

### 8.2.78 The action on a pair of wires is an isometry

**Statement.** For a natural number  $q$ , indexes  $\text{control}$ ,  $\text{target}$ , a matrix  $U$ : if  $\text{control} \neq \text{target}$  and  $U^\dagger * U = 1$ , then the product of  $(\text{onWires } \text{control } \text{target } \text{hne } U)^\dagger$  and  $\text{onWires } \text{control } \text{target } \text{hne } U$  equals 1.

**Proof.** The key step rewrites with the definition of the action on a pair of wires, standard identities for matrices, the usual algebraic identities and the hypothesis that  $U^\dagger * U = 1$ .

**Lean 4 source** `QLambda/Composer/MatrixSemantics.lean`

```
theorem onWires_isometry {q : Nat} (control target : Fin q)
  (hne : control != target) (U : Matrix (Bool x Bool) (Bool x Bool) ?)
  (hU : U? * U = 1) :
  (onWires control target hne U)? * onWires control target hne U = 1 := by
  classical
  rw [onWires]
  have hconj :
    (Matrix.reindexAlgEquiv ? ? (registerSplit_2 control target hne).symm
      (U ?? (1 : Matrix (OtherBits_2 control target)
        (OtherBits_2 control target) ?)))? =
    Matrix.reindexAlgEquiv ? ? (registerSplit_2 control target hne).symm
      (U? ?? (1 : Matrix (OtherBits_2 control target)
        (OtherBits_2 control target) ?)) := by
  change
    (Matrix.reindex (registerSplit_2 control target hne).symm
```

```

      (registerSplit_2 control target hne).symm
      (U ?? (1 : Matrix (OtherBits_2 control target)
        (OtherBits_2 control target) ?)))? =
      Matrix.reindex (registerSplit_2 control target hne).symm
      (registerSplit_2 control target hne).symm
      (U? ?? (1 : Matrix (OtherBits_2 control target)
        (OtherBits_2 control target) ?))
      rw [Matrix.conjTranspose_reindex, Matrix.conjTranspose_kronecker,
        conjTranspose_one]
      rw [hconj, <- map_mul,
        <- Matrix.mul_kronecker_mul, hU, Matrix.one_mul,
        Matrix.one_kronecker_one]
      exact map_one
      (Matrix.reindexAlgEquiv ?? (registerSplit_2 control target hne).symm)

```

### 8.2.79 Canonical arbitrary-register Pauli X

**Definition.** Canonical arbitrary-register Pauli X.

**Construction.** Defined to be the action on a single wire of  $w$  and  $x_2$ .

**Lean 4 source** [QLambda/Composer/MatrixSemantics.lean](#)

```

noncomputable def xMatrix {q : Nat} (w : Fin q) : KrausOperator (CQ.QDim q) (CQ.QDim q)
  :=
  onWire w x_2

```

### 8.2.80 Canonical arbitrary-register Hadamard

**Definition.** Canonical arbitrary-register Hadamard.

**Construction.** Defined to be the action on a single wire of  $w$  and  $h_2$ .

**Lean 4 source** [QLambda/Composer/MatrixSemantics.lean](#)

```

noncomputable def hMatrix {q : Nat} (w : Fin q) : KrausOperator (CQ.QDim q) (CQ.QDim q)
  :=
  onWire w h_2

```

### 8.2.81 Canonical arbitrary-register T phase gate

**Definition.** Canonical arbitrary-register T phase gate.

**Construction.** Defined to be the action on a single wire of  $w$  and  $t_2$ .

**Lean 4 source** [QLambda/Composer/MatrixSemantics.lean](#)

```

noncomputable def tMatrix {q : Nat} (w : Fin q) : KrausOperator (CQ.QDim q) (CQ.QDim q)
  :=
  onWire w t_2

```

### 8.2.82 Canonical arbitrary-register Y rotation

**Definition.** Canonical arbitrary-register Y rotation.

**Construction.** Defined to be the action on a single wire of  $w$  and the  $2 \times 2$  matrix of the Y-rotation gate of  $\theta$ .

**Lean 4 source** [QLambda/Composer/MatrixSemantics.lean](#)

```
noncomputable def ryMatrix {q : Nat} (? : ?) (w : Fin q) :  
  KrausOperator (CQ.QDim q) (CQ.QDim q) :=  
  onWire w (ry_2 ?)
```

### 8.2.83 Canonical arbitrary-register controlled X

**Definition.** Canonical arbitrary-register controlled X. A repeated wire denotes identity.

**Construction.** Defined to be if  $h : \text{control} = \text{target}$  then 1 else  $\text{onWires control target } h \text{ cx}_4$ .

**Lean 4 source** [QLambda/Composer/MatrixSemantics.lean](#)

```
noncomputable def cxMatrix {q : Nat} (control target : Fin q) :  
  KrausOperator (CQ.QDim q) (CQ.QDim q) :=  
  if h : control = target then 1 else onWires control target h cx?
```

### 8.2.84 Canonical computational-basis projector on one register wire

**Definition.** Canonical computational-basis projector on one register wire.

**Construction.** Defined to be the action on a single wire of  $w$  and the  $2 \times 2$  matrix of the projection of  $b$ .

**Lean 4 source** [QLambda/Composer/MatrixSemantics.lean](#)

```
noncomputable def projector {q : Nat} (w : Fin q) (b : Bool) :  
  KrausOperator (CQ.QDim q) (CQ.QDim q) :=  
  onWire w (proj_2 b)
```

### 8.2.85 Canonical reset Kraus operator $|0\rangle\langle b|$ on one register wire

**Definition.** Canonical reset Kraus operator  $|0\rangle\langle b|$  on one register wire.

**Construction.** Defined to be the action on a single wire of  $w$  and the  $2 \times 2$  matrix of the reset of  $b$ .

**Lean 4 source** [QLambda/Composer/MatrixSemantics.lean](#)

```
noncomputable def resetKraus {q : Nat} (w : Fin q) (b : Bool) :  
  KrausOperator (CQ.QDim q) (CQ.QDim q) :=  
  onWire w (reset_2 b)
```

### 8.2.86 The Pauli-X matrix is an isometry

**Statement.** For a natural number  $q$ , an index  $w$ : the product of  $(xMatrix\ w)^\dagger$  and the Pauli-X matrix of  $w$  equals 1.

**Proof.** The goal is simplified using the definition of the Pauli-X matrix and the fact that the  $2 \times 2$  matrix of the Pauli-X gate is an isometry.

**Lean 4 source** [QLambda/Composer/MatrixSemantics.lean](#)

```
theorem xMatrix_isometry {q : Nat} (w : Fin q) :  
  (xMatrix w)? * xMatrix w = 1 := by  
  simp [xMatrix, x_2_isometry]
```

### 8.2.87 The Hadamard matrix is an isometry

**Statement.** For a natural number  $q$ , an index  $w$ : the product of  $(hMatrix\ w)^\dagger$  and the Hadamard matrix of  $w$  equals 1.

**Proof.** The goal is simplified using the definition of the Hadamard matrix and the fact that the  $2 \times 2$  matrix of the Hadamard gate is an isometry.

**Lean 4 source** [QLambda/Composer/MatrixSemantics.lean](#)

```
theorem hMatrix_isometry {q : Nat} (w : Fin q) :  
  (hMatrix w)? * hMatrix w = 1 := by  
  simp [hMatrix, h_2_isometry]
```

### 8.2.88 The T-gate matrix is an isometry

**Statement.** For a natural number  $q$ , an index  $w$ : the product of  $(tMatrix\ w)^\dagger$  and the T-gate matrix of  $w$  equals 1.

**Proof.** The goal is simplified using the definition of the T-gate matrix and the fact that the  $2 \times 2$  matrix of the T gate is an isometry.

**Lean 4 source** [QLambda/Composer/MatrixSemantics.lean](#)

```
theorem tMatrix_isometry {q : Nat} (w : Fin q) :  
  (tMatrix w)? * tMatrix w = 1 := by  
  simp [tMatrix, t_2_isometry]
```

### 8.2.89 The Y-rotation matrix is an isometry

**Statement.** For a natural number  $q$ , a real number  $\theta$ , an index  $w$ : the product of  $(ryMatrix\ \theta\ w)^\dagger$  and the Y-rotation matrix of  $\theta$  and  $w$  equals 1.

**Proof.** The goal is simplified using the definition of the Y-rotation matrix and the fact that the  $2 \times 2$  matrix of the Y-rotation gate is an isometry.

**Lean 4 source** [QLambda/Composer/MatrixSemantics.lean](#)

```

theorem ryMatrix_isometry {q : Nat} (? : ?) (w : Fin q) :
  (ryMatrix ? w)? * ryMatrix ? w = 1 := by
  simp [ryMatrix, ry_2_isometry]

```

### 8.2.90 The controlled-NOT matrix is an isometry

**Statement.** For a natural number  $q$ , indexes  $\text{control}, \text{target}$ : the product of  $(\text{cxMatrix } \text{control } \text{target})^\dagger$  and the controlled-NOT matrix of  $\text{control}$  and  $\text{target}$  equals 1.

**Proof.** The argument splits on the relevant condition. The goal is simplified using the definition of the controlled-NOT matrix and the fact that the action on a pair of wires is an isometry.

**Lean 4 source** [QLambda/Composer/MatrixSemantics.lean](#)

```

theorem cxMatrix_isometry {q : Nat} (control target : Fin q) :
  (cxMatrix control target)? * cxMatrix control target = 1 := by
  classical
  by_cases h : control = target
  * simp [cxMatrix, h]
  * simp only [cxMatrix, dite_eq_right h]
  exact onWires_isometry control target h cx?_isometry

```

### 8.2.91 Computational-basis projector of a conjugate transpose

**Statement.** For a natural number  $q$ , an index  $w$ , a bit  $b$ :  $(\text{projector } w \ b)^\dagger$  equals the computational-basis projector of  $w$  and  $b$ .

**Proof.** The goal is simplified using the definition of the computational-basis projector.

**Lean 4 source** [QLambda/Composer/MatrixSemantics.lean](#)

```

@[simp] theorem projector_conjTranspose {q : Nat} (w : Fin q) (b : Bool) :
  (projector w b)? = projector w b := by
  simp [projector]

```

### 8.2.92 The computational-basis projector is idempotent

**Statement.** For a natural number  $q$ , an index  $w$ , a bit  $b$ : the product of the computational-basis projector of  $w$  and  $b$  and the computational-basis projector of  $w$  and  $b$  equals the computational-basis projector of  $w$  and  $b$ .

**Proof.** The goal is simplified using the definition of the computational-basis projector.

**Lean 4 source** [QLambda/Composer/MatrixSemantics.lean](#)

```

@[simp] theorem projector_mul_self {q : Nat} (w : Fin q) (b : Bool) :
  projector w b * projector w b = projector w b := by
  simp [projector]

```



### 8.2.93 Completeness of the computational-basis projector

**Statement.** For a natural number  $q$ , an index  $w$ : the sum of the computational-basis projector of  $w$  and `false` and the computational-basis projector of  $w$  and `true` equals 1.

**Proof.** The key step rewrites with the definition of the computational-basis projector, the action on a single wire of a sum, the completeness of the  $2 \times 2$  matrix of the projection and the action on a single wire of one.

**Lean 4 source** `QLambda/Composer/MatrixSemantics.lean`

```
theorem projector_completeness {q : Nat} (w : Fin q) :
  projector w false + projector w true = 1 := by
  classical
  rw [projector, projector, onWire_add, proj_2_completeness, onWire_one]
```

### 8.2.94 Completeness of the Kraus operators of reset

**Statement.** For a natural number  $q$ , an index  $w$ : the sum of the product of  $(\text{resetKraus } w \text{ false})^\dagger$  and the Kraus operators of reset of  $w$  and `false` and the product of  $(\text{resetKraus } w \text{ true})^\dagger$  and the Kraus operators of reset of  $w$  and `true` equals 1.

**Proof.** The key step rewrites with the definition of the Kraus operators of reset, the action on a single wire of a conjugate transpose, the action on a single wire of a product and the action on a single wire of a sum.

**Lean 4 source** `QLambda/Composer/MatrixSemantics.lean`

```
theorem resetKraus_completeness {q : Nat} (w : Fin q) :
  (resetKraus w false)? * resetKraus w false +
  (resetKraus w true)? * resetKraus w true = 1 := by
  simp only [resetKraus, onWire_conjTranspose, onWire_mul]
  rw [onWire_add, reset_2_completeness, onWire_one]
```

### 8.2.95 Two Kraus operators whose Gram matrices sum to identity preserve trace

**Statement.** Two Kraus operators whose Gram matrices sum to identity preserve trace. Formally:  $\text{tr} (\text{KrausFamily.applyMat } [A, B] \rho) = \text{tr } \rho$ .

**Proof.** The key step rewrites with the action on a matrix of an extended list for Kraus families, the action on a matrix of a single-entry element for Kraus families, standard identities for matrices and cyclicity of the trace.

**Lean 4 source** `QLambda/Composer/MatrixSemantics.lean`

```
theorem trace_applyMat_pair_of_completeness {n : Nat}
  (A B : KrausOperator n n) (h : A? * A + B? * B = 1)
  (? : Matrix (Fin n) (Fin n) ?) :
  Matrix.trace (KrausFamily.applyMat [A, B] ?) = Matrix.trace ? := by
  rw [KrausFamily.applyMat_cons, KrausFamily.applyMat_single, Matrix.trace_add]
  rw [Matrix.trace_mul_comm (A * ?) A?, Matrix.trace_mul_comm (B * ?) B?]
  rw [ <- Matrix.mul_assoc, <- Matrix.mul_assoc, <- Matrix.trace_add,
    <- Matrix.add_mul, h, Matrix.one_mul]
```

### 8.2.96 Computational-basis measurement of an arbitrary register wire

**Definition.** Computational-basis measurement of an arbitrary register wire.

**Construction.** Constructed by supplying each component: trace nonincreasing. The accompanying laws are verified from the definitions.

#### Lean 4 source `QLambda/Composer/MatrixSemantics.lean`

```
noncomputable def measure {q : Nat} (w : Fin q) :
  QuantumInstrument (CQ.QDim q) (CQ.QDim q) 2 where
  branch i := if i = 0 then [projector w false] else [projector w true]
  trace_nonincreasing := by
    intro ? _
    rw [Fin.sum_univ_two]
    have hne : (1 : Fin 2) != 0 := by decide
    simp only [hne, reduceIte]
    rw [KrausFamily.applyMat_single, KrausFamily.applyMat_single]
    rw [Matrix.trace_mul_comm (projector w false * ?) (projector w false)?,
      Matrix.trace_mul_comm (projector w true * ?) (projector w true)?]
    rw [projector_conjTranspose, projector_conjTranspose,
      <- Matrix.mul_assoc, <- Matrix.mul_assoc,
      projector_mul_self, projector_mul_self,
      <- Complex.add_re, <- Matrix.trace_add, <- Matrix.add_mul,
      projector_completeness, Matrix.one_mul]
```

### 8.2.97 Reset an arbitrary register wire to the computational state $|0\rangle$

**Definition.** Reset an arbitrary register wire to the computational state  $|0\rangle$ .

**Construction.** Constructed by supplying each component: Kraus operators and trace nonincreasing. The accompanying laws are verified from the definitions.

#### Lean 4 source `QLambda/Composer/MatrixSemantics.lean`

```
noncomputable def reset {q : Nat} (w : Fin q) :
  QuantumOperation (CQ.QDim q) (CQ.QDim q) where
  kraus := [resetKraus w false, resetKraus w true]
  trace_nonincreasing := by
    intro ? _
    rw [trace_applyMat_pair_of_completeness _ _ (resetKraus_completeness w) ?]
```

### 8.2.98 Entrywise formula for a one-qubit operator lifted to an arbitrary wire

**Statement.** Entrywise formula for a one-qubit operator lifted to an arbitrary wire.

**Proof.** The key step rewrites with the definition of the register split, standard identities for equivalences, the definition of the basis equivalence and the definition of the split wire.

#### Lean 4 source `QLambda/Composer/MatrixSemantics.lean`

```
theorem onWire_apply {q : Nat} (w : Fin q) (U : QubitMatrix)
  (i j : Fin (CQ.QDim q)) :
  onWire w U i j =
    U (basisBits i w) (basisBits j w) *
```

```

    if (fun u : {v : Fin q // v != w} => basisBits i u.1) =
      (fun u => basisBits j u.1) then 1 else 0 := by
change
  (U ?? (1 : Matrix (OtherBits w) (OtherBits w) ?))
  (registerSplit w i) (registerSplit w j) =
  U (basisBits i w) (basisBits j w) *
    if (fun u : {v : Fin q // v != w} => basisBits i u.1) =
      (fun u => basisBits j u.1) then 1 else 0
simp only [registerSplit, Equiv.trans_apply, basisEquiv, Equiv.coe_fn_mk,
  splitWire]
rw [Matrix.kroneckerMap_apply]
simp [Matrix.one_apply]

```

### 8.2.99 Entrywise formula for a two-qubit operator lifted to distinct wires

**Statement.** Entrywise formula for a two-qubit operator lifted to distinct wires.

**Proof.** The key step rewrites with the definition of the  $2 \times 2$  matrix of the register split, standard identities for equivalences, the definition of the basis equivalence and the definition of the split wires.

**Lean 4 source** [QLambda/Composer/MatrixSemantics.lean](#)

```

theorem onWires_apply {q : Nat} (control target : Fin q) (hne : control != target)
  (U : Matrix (Bool x Bool) (Bool x Bool) ?)
  (i j : Fin (CQ.QDim q)) :
  onWires control target hne U i j =
  U (basisBits i control, basisBits i target)
    (basisBits j control, basisBits j target) *
    if (fun u : {v : Fin q // v != control /\ v != target} =>
      basisBits i u.1) =
      (fun u => basisBits j u.1) then 1 else 0 := by
change
  (U ?? (1 : Matrix (OtherBits_2 control target) (OtherBits_2 control target) ?))
  (registerSplit_2 control target hne i)
  (registerSplit_2 control target hne j) =
  U (basisBits i control, basisBits i target)
    (basisBits j control, basisBits j target) *
    if (fun u : {v : Fin q // v != control /\ v != target} =>
      basisBits i u.1) =
      (fun u => basisBits j u.1) then 1 else 0
simp only [registerSplit_2, Equiv.trans_apply, basisEquiv, Equiv.coe_fn_mk,
  splitWires]
rw [Matrix.kroneckerMap_apply]
simp [Matrix.one_apply]

```

### 8.2.100 $\text{RY}(2 \cdot \arccos(\sqrt{p}))$ prepares amplitude $\sqrt{p}$ on the zero state

**Statement.**  $\text{RY}(2 \cdot \arccos(\sqrt{p}))$  prepares amplitude  $\sqrt{p}$  on the zero state. Formally:  $\text{Real.cos}((\text{AngleExpr.coin } p).\text{eval} / 2) = \text{Real.sqrt } p.\text{real}$ .

**Proof.** The key step rewrites with standard identities for real numbers, the definition of the evaluation and the usual algebraic identities. The remaining numerical facts are checked by direct computation.

**Lean 4 source** [QLambda/Composer/MatrixSemantics.lean](#)

```

theorem coin_cos (p : Probability) :
  Real.cos ((AngleExpr.coin p).eval / 2) = Real.sqrt p.real := by
  have hsqrt0 : 0 <= Real.sqrt p.real := Real.sqrt_nonneg _
  have hsqrt1 : Real.sqrt p.real <= 1 := by
    rw [Real.sqrt_le_one]
    exact p.real_le_one
  simp only [AngleExpr.eval]
  rw [mul_div_cancel_left_0 _ (by norm_num : (2 : ?) != 0)]
  exact Real.cos_arccos (le_trans (by norm_num : (-1 : ?) <= 0) hsqrt0) hsqrt1

```

### 8.2.101 $\text{RY}(2 \cdot \arccos(\sqrt{p}))$ prepares amplitude $\sqrt{1-p}$ on the one state

**Statement.**  $\text{RY}(2 \cdot \arccos(\sqrt{p}))$  prepares amplitude  $\sqrt{1-p}$  on the one state. Formally:  $\text{Real.sin}((\text{AngleExpr.coin } p).\text{eval} / 2) = \text{Real.sqrt } (1 - p.\text{real})$ .

**Proof.** The key step rewrites with standard identities for real numbers, the definition of the evaluation and the usual algebraic identities.

**Lean 4 source** [QLambda/Composer/MatrixSemantics.lean](#)

```

theorem coin_sin (p : Probability) :
  Real.sin ((AngleExpr.coin p).eval / 2) = Real.sqrt (1 - p.real) := by
  have hsqrt0 : 0 <= Real.sqrt p.real := Real.sqrt_nonneg _
  have hsqrt1 : Real.sqrt p.real <= 1 := by
    rw [Real.sqrt_le_one]
    exact p.real_le_one
  simp only [AngleExpr.eval]
  rw [mul_div_cancel_left_0 _ (by norm_num : (2 : ?) != 0), Real.sin_arccos,
    Real.sq_sqrt p.real_nonneg]

```

### 8.2.102 Coin-angle amplitudes after RY on the computational zero state

**Statement.** Coin-angle amplitudes after RY on the computational zero state.

**Proof.** Each component of the claim is established separately. The goal is simplified using the definition of the  $2 \times 2$  matrix of the Y-rotation gate, the  $\text{RY}(2 \cdot \arccos(\sqrt{p}))$  prepares amplitude  $\sqrt{p}$  on the zero state and the  $\text{RY}(2 \cdot \arccos(\sqrt{p}))$  prepares amplitude  $\sqrt{1-p}$  on the one state.

**Lean 4 source** [QLambda/Composer/MatrixSemantics.lean](#)

```

theorem ry_2_coin_zero (p : Probability) :
  ry_2 (AngleExpr.coin p).eval false false = Real.sqrt p.real /\
  ry_2 (AngleExpr.coin p).eval true false = Real.sqrt (1 - p.real) := by
  constructor
  * simp [ry_2, coin_cos]
  * simp [ry_2, coin_sin]

```

### 8.2.103 Action of the $2 \times 2$ matrix of the Y-rotation gate on false

**Statement.** For a real number  $\theta$ , a bit  $j$ : the  $2 \times 2$  matrix of the Y-rotation gate of  $\theta$ , false,  $j$  equals if  $j$  then  $-\sin \text{Half } \theta$  else  $\cos \text{Half } \theta$ .

**Proof.** By case analysis on the bit  $j$ . The goal is simplified using the definition of the  $2 \times 2$  matrix of the Y-rotation gate.

**Lean 4 source** [QLambda/Composer/MatrixSemantics.lean](#)

```
theorem ry_2_apply_false (? : ?) (j : Bool) :
  ry_2 ? false j = if j then -sinHalf ? else cosHalf ? := by
  cases j <;> simp [ry_2]
```

#### 8.2.104 Action of the $2 \times 2$ matrix of the Y-rotation gate on true

**Statement.** For a real number  $\theta$ , a bit  $j$ : the  $2 \times 2$  matrix of the Y-rotation gate of  $\theta$ , true,  $j$  equals if  $j$  then  $\cosHalf \ \theta$  else  $\sinHalf \ \theta$ .

**Proof.** By case analysis on the bit  $j$ . The goal is simplified using the definition of the  $2 \times 2$  matrix of the Y-rotation gate.

**Lean 4 source** [QLambda/Composer/MatrixSemantics.lean](#)

```
theorem ry_2_apply_true (? : ?) (j : Bool) :
  ry_2 ? true j = if j then cosHalf ? else sinHalf ? := by
  cases j <;> simp [ry_2]
```

#### 8.2.105 Test fixture of the Pauli-X gate of one

**Statement.** The product of  $(xMatrix \ 0)^\dagger$  and the Pauli-X matrix at 0 equals 1.

**Proof.** This is an instance of the fact that the Pauli-X matrix is an isometry.

**Lean 4 source** [QLambda/Composer/MatrixSemantics.lean](#)

```
theorem fixture_x_one :
  (xMatrix (0 : Fin 1))? * xMatrix (0 : Fin 1) = 1 :=
  xMatrix_isometry _
```

#### 8.2.106 Test fixture of the Hadamard gate of one

**Statement.** The product of  $(hMatrix \ 0)^\dagger$  and the Hadamard matrix at 0 equals 1.

**Proof.** This is an instance of the fact that the Hadamard matrix is an isometry.

**Lean 4 source** [QLambda/Composer/MatrixSemantics.lean](#)

```
theorem fixture_h_one :
  (hMatrix (0 : Fin 1))? * hMatrix (0 : Fin 1) = 1 :=
  hMatrix_isometry _
```

#### 8.2.107 Test fixture of the T gate of one

**Statement.** The product of  $(tMatrix \ 0)^\dagger$  and the T-gate matrix at 0 equals 1.

**Proof.** This is an instance of the fact that the T-gate matrix is an isometry.

**Lean 4 source** [QLambda/Composer/MatrixSemantics.lean](#)

```
theorem fixture_t_one :
  (tMatrix (0 : Fin 1))† * tMatrix (0 : Fin 1) = 1 :=
  tMatrix_isometry _
```

### 8.2.108 Test fixture of the Y-rotation gate of one

**Statement.** For a real number  $\theta$ : the product of  $(\text{ryMatrix } \theta \ 0)^{\dagger}$  and the Y-rotation matrix of  $\theta$  at 0 equals 1.

**Proof.** This is an instance of the fact that the Y-rotation matrix is an isometry.

**Lean 4 source** [QLambda/Composer/MatrixSemantics.lean](#)

```
theorem fixture_ry_one (? : ?) :
  (ryMatrix ? (0 : Fin 1))† * ryMatrix ? (0 : Fin 1) = 1 :=
  ryMatrix_isometry _ _
```

### 8.2.109 Test fixture of the measurement of one

**Statement.** The sum of the computational-basis projector of `false` at 0 and the computational-basis projector of `true` at 0 equals 1.

**Proof.** This is an instance of the completeness of the computational-basis projector.

**Lean 4 source** [QLambda/Composer/MatrixSemantics.lean](#)

```
theorem fixture_measure_one :
  projector (0 : Fin 1) false + projector (0 : Fin 1) true = 1 :=
  projector_completeness _
```

### 8.2.110 Test fixture of the reset of one

**Statement.** The sum of the product of  $(\text{resetKraus } 0 \ \text{false})^{\dagger}$  and the Kraus operators of reset of `false` at 0 and the product of  $(\text{resetKraus } 0 \ \text{true})^{\dagger}$  and the Kraus operators of reset of `true` at 0 equals 1.

**Proof.** This is an instance of the completeness of the Kraus operators of reset.

**Lean 4 source** [QLambda/Composer/MatrixSemantics.lean](#)

```
theorem fixture_reset_one :
  (resetKraus (0 : Fin 1) false)† * resetKraus (0 : Fin 1) false +
  (resetKraus (0 : Fin 1) true)† * resetKraus (0 : Fin 1) true = 1 :=
  resetKraus_completeness _
```

### 8.2.111 Test fixture of the controlled-NOT gate of the two

**Statement.** The product of  $(\text{cxMatrix } 0 \ 1)^{\dagger}$  and the controlled-NOT matrix at 0, 1 equals 1.

**Proof.** This is an instance of the fact that the controlled-NOT matrix is an isometry.

**Lean 4 source** [QLambda/Composer/MatrixSemantics.lean](#)

```
theorem fixture_cx_two :
  (cxMatrix (0 : Fin 2) 1)? * cxMatrix 0 1 = 1 :=
  cxMatrix_isometry _ _
```

### 8.2.112 The test fixture controlled-NOT gate distinct two

**Statement.**  $0 \neq 1$ . Formally:  $0 \neq 1$ .

**Proof.** The claim is a finite computation and is checked by evaluating it.

**Lean 4 source** [QLambda/Composer/MatrixSemantics.lean](#)

```
theorem fixture_cx_distinct_two : (0 : Fin 2) != 1 := by
  decide
```

### 8.2.113 Test fixture of the Hadamard gate of the three

**Statement.** The product of  $(\text{hMatrix } 2)^\dagger$  and the Hadamard matrix at 2 equals 1.

**Proof.** This is an instance of the fact that the Hadamard matrix is an isometry.

**Lean 4 source** [QLambda/Composer/MatrixSemantics.lean](#)

```
theorem fixture_h_three :
  (hMatrix (2 : Fin 3))? * hMatrix 2 = 1 :=
  hMatrix_isometry _
```

### 8.2.114 Test fixture of the controlled-NOT gate of the three

**Statement.** The product of  $(\text{cxMatrix } 0 \ 2)^\dagger$  and the controlled-NOT matrix at 0, 2 equals 1.

**Proof.** This is an instance of the fact that the controlled-NOT matrix is an isometry.

**Lean 4 source** [QLambda/Composer/MatrixSemantics.lean](#)

```
theorem fixture_cx_three :
  (cxMatrix (0 : Fin 3) 2)? * cxMatrix 0 2 = 1 :=
  cxMatrix_isometry _ _
```

### 8.2.115 Canonical ideal matrix model for the typed Composer core

**Definition.** Canonical ideal matrix model for the typed Composer core.

**Construction.** Constructed by supplying each component: measurement and reset. The accompanying laws are verified from the definitions.

**Lean 4 source** [QLambda/Composer/MatrixSemantics.lean](#)

```
noncomputable def canonicalModel (q c : Nat) : Model q c where
  gate
  | .x w => QuantumOperation.ofIsometry (xMatrix w) (xMatrix_isometry w)
  | .h w => QuantumOperation.ofIsometry (hMatrix w) (hMatrix_isometry w)
  | .t w => QuantumOperation.ofIsometry (tMatrix w) (tMatrix_isometry w)
```

```

| .ry ? w =>
  QuantumOperation.ofIsometry (ryMatrix ?.eval w) (ryMatrix_isometry ?.eval w)
| .cx control target =>
  QuantumOperation.ofIsometry (cxMatrix control target)
    (cxMatrix_isometry control target)
measure := measure
reset := reset

```

### 8.2.116 Ideal primitive model for one fixed-register Composer circuit

**Definition.** Ideal primitive model for one fixed-register Composer circuit.

**Construction.** An element consists of gate, measure and reset.

**Lean 4 source** [QLambda/Composer/Model.lean](#)

```

structure Model (q c : Nat) where
  gate : Gate q -> QuantumOperation (CQ.QDim q) (CQ.QDim q)
  measure : Fin q -> QuantumInstrument (CQ.QDim q) (CQ.QDim q) 2
  reset : Fin q -> QuantumOperation (CQ.QDim q) (CQ.QDim q)

```

### 8.2.117 Definition of the comma-separated rendering

**Definition.** The comma-separated rendering of `xs` is an element of `String`.

**Construction.** Defined to be the intercalate of `", , "`, `xs`.

**Lean 4 source** [QLambda/Composer/OpenQASM.lean](#)

```

private def comma (xs : List String) : String :=
  String.intercalate ", " xs

```

### 8.2.118 Definition of the lines

**Definition.** The lines of `xs` is an element of `String`.

**Construction.** Defined to be the intercalate of `"\n"` and `xs`.

**Lean 4 source** [QLambda/Composer/OpenQASM.lean](#)

```

private def lines (xs : List String) : String :=
  String.intercalate "\n" xs

```

### 8.2.119 Definition of the qref

**Definition.** The qref of `i` is an element of `String`.

**Construction.** Defined to be `"q[" ++ toString i.val ++ "]"`.

**Lean 4 source** [QLambda/Composer/OpenQASM.lean](#)

```

private def qref {q : Nat} (i : Fin q) : String :=
  "q[" ++ toString i.val ++ "]"

```



### 8.2.120 Definition of the cref

**Definition.** The cref of  $i$  is an element of `String`.

**Construction.** Defined to be `"c[" ++ toString i.val ++ "]"`.

**Lean 4 source** [QLambda/Composer/OpenQASM.lean](#)

```
private def cref {c : Nat} (i : Fin c) : String :=
  "c[" ++ toString i.val ++ "]"
```

### 8.2.121 Definition of the OpenQASM rendering of classical expressions

**Definition.** The OpenQASM rendering is a function of type `CExpr c → String`.

**Construction.** Defined by cases on the input: `.lit true`  $\mapsto$  `"true"`; `.lit false`  $\mapsto$  `"false"`; `.bit i`  $\mapsto$  the cref of  $i$ ; `.not e`  $\mapsto$  `"!(" ++ e.toOpenQASM ++ ")"`; `.and e1 e2`  $\mapsto$  `"(" ++ e1.toOpenQASM ++ " && " ++ e2.toOpenQASM ++ ")"`; `.or e1 e2`  $\mapsto$  `"(" ++ e1.toOpenQASM ++ " || " ++ e2.toOpenQASM ++ ")"`; `.xor e1 e2`  $\mapsto$  `"(" ++ e1.toOpenQASM ++ " != " ++ e2.toOpenQASM ++ ")"`.

**Lean 4 source** [QLambda/Composer/OpenQASM.lean](#)

```
def CExpr.toOpenQASM {c : Nat} : CExpr c -> String
| .lit true => "true"
| .lit false => "false"
| .bit i => cref i
| .not e => "!(" ++ e.toOpenQASM ++ ")"
| .and e1 e2 => "(" ++ e1.toOpenQASM ++ " && " ++ e2.toOpenQASM ++ ")"
| .or e1 e2 => "(" ++ e1.toOpenQASM ++ " || " ++ e2.toOpenQASM ++ ")"
| .xor e1 e2 => "(" ++ e1.toOpenQASM ++ " != " ++ e2.toOpenQASM ++ ")"
```

### 8.2.122 Definition of the OpenQASM rendering of angle expressions

**Definition.** The OpenQASM rendering is a function of type `AngleExpr → String`.

**Construction.** Defined by cases on the input: `.rational r`  $\mapsto$  the passage to string of  $r$ ; `.coin p`  $\mapsto$  `"2*acos(sqrt(" ++ toString p.val ++ "))"`.

**Lean 4 source** [QLambda/Composer/OpenQASM.lean](#)

```
def AngleExpr.toOpenQASM : AngleExpr -> String
| .rational r => toString r
| .coin p => "2*acos(sqrt(" ++ toString p.val ++ "))"
```

### 8.2.123 Definition of the OpenQASM rendering of gates

**Definition.** The OpenQASM rendering is a function of type `Gate q → String`.

**Construction.** Defined by cases on the input: `.x w`  $\mapsto$  `"x " ++ qref w ++ ";"`; `.h w`  $\mapsto$  `"h " ++ qref w ++ ";"`; `.t w`  $\mapsto$  `"t " ++ qref w ++ ";"`; `.ry  $\theta$  w`  $\mapsto$  `"ry(" ++  $\theta$ .toOpenQASM ++ ") " ++ qref w ++ ";"`; `.cx control target`  $\mapsto$  `"cx " ++ qref control ++ ", " ++ qref target ++ ";"`; `[]`  $\mapsto `[]`; `i :: is`  $\mapsto$  `instrToOpenQASM i`$

:: blockToOpenQASM is; .gate g  $\mapsto$  the OpenQASM rendering of g; and so on for the remaining cases.

#### Lean 4 source QLambda/Composer/OpenQASM.lean

```
def Gate.toOpenQASM {q : Nat} : Gate q -> String
| .x w => "x " ++ qref w ++ ";"
| .h w => "h " ++ qref w ++ ";"
| .t w => "t " ++ qref w ++ ";"
| .ry ? w => "ry(" ++ ?.toOpenQASM ++ ") " ++ qref w ++ ";"
| .cx control target => "cx " ++ qref control ++ ", " ++ qref target ++ ";"

mutual

private partial def blockToOpenQASM {q c : Nat} : List (Instr q c) -> List String
| [] => []
| i :: is => instrToOpenQASM i :: blockToOpenQASM is

private partial def instrToOpenQASM {q c : Nat} : Instr q c -> String
| .gate g => g.toOpenQASM
| .measure qbit cbit => cref cbit ++ " = measure " ++ qref qbit ++ ";"
| .reset qbit => "reset " ++ qref qbit ++ ";"
| .store cbit e => cref cbit ++ " = " ++ e.toOpenQASM ++ ";"
| .barrier qs => "barrier " ++ comma (qs.map qref) ++ ";"
| .delay duration qs =>
  "delay[" ++ toString duration ++ "dt] " ++ comma (qs.map qref) ++ ";"
| .ite guard yes no =>
  "if (" ++ guard.toOpenQASM ++ ") {\n" ++
  lines (blockToOpenQASM yes) ++
  "\n} else {\n" ++ lines (blockToOpenQASM no) ++ "\n}"
| .switch guard cases =>
  "switch (" ++ guard.toOpenQASM ++ ") {\n" ++
  lines (cases.map fun branch =>
    "case " ++ toString branch.1 ++ " {\n" ++
    lines (blockToOpenQASM branch.2) ++ "\n}") ++
  "\n}"
| .forLoop 0 _ => "// zero-iteration for loop"
| .forLoop (count + 1) body =>
  "for uint _i in [0:" ++ toString count ++ "]" {\n" ++
  lines (blockToOpenQASM body) ++ "\n}"
| .whileLoop fuel guard body =>
  boundedWhileToOpenQASM fuel guard body
| .box label body =>
  "box { // " ++ label ++ "\n" ++ lines (blockToOpenQASM body) ++ "\n}"
| .break => "break;"
| .continue => "continue;"

/-- Bounded while is exported by finite unrolling, so QASM execution and
denotation have the same iteration cap. -/
private partial def boundedWhileToOpenQASM {q c : Nat} :
  Nat -> CExpr c -> List (Instr q c) -> String
| 0, _, _ => "// bounded while exhausted"
| fuel + 1, guard, body =>
  "if (" ++ guard.toOpenQASM ++ ") {\n" ++
  lines (blockToOpenQASM body) ++ "\n" ++
  boundedWhileToOpenQASM fuel guard body ++ "\n}"
```

### 8.2.124 Render a program

**Definition.** Render a program. This proof-free form is also used by the parser's canonicity check; clients should normally use `Program.toOpenQASM`.

**Construction.** Defined by an explicit formula built from the lines, the qubit, the passage to string and the bit.

#### Lean 4 source `QLambda/Composer/OpenQASM.lean`

```
def Program.renderOpenQASM {v q c} (P : Program v q c) : String :=
  lines
  [ "OPENQASM 3.0;",
    "include \"stdgates.inc\";",
    "qubit[" ++ toString q ++ "] q;",
    "bit[" ++ toString c ++ "] c;",
    lines (blockToOpenQASM P.body) ]
```

### 8.2.125 Export a well-formed normalized program as OpenQASM 3 text

**Definition.** Export a well-formed normalized program as OpenQASM 3 text.

**Construction.** Defined to be the rendering OpenQASM of `P`.

#### Lean 4 source `QLambda/Composer/OpenQASM.lean`

```
def Program.toOpenQASM {v q c} (P : Program v q c)
  (_hP : P.WellFormed) : String :=
  P.renderOpenQASM
```

### 8.2.126 Definition of the parser for finite indexes

**Definition.** The parser for finite indexes of `bound`, `pre` and `s` is an element of `Option (Fin bound)`.

**Construction.** Defined by an explicit formula built from the starts with, the pre-composite, the ends with and the length.

#### Lean 4 source `QLambda/Composer/OpenQASMParser.lean`

```
private def parseFin (bound : Nat) (pre : String) (s : String) :
  Option (Fin bound) := do
  if !(s.startsWith (pre ++ "[") || !s.endsWith "]") then
    none
  else
    let digits := ((s.drop (pre.length + 1)).toString.dropEnd 1).toString
    let n <- digits.toNat?
    if h : n < bound then some <n, h> else none
```

### 8.2.127 Definition of the parser for quantum refs

**Definition.** The parser for quantum refs of `q` is a function of type `String → Option (Fin q)`.

**Construction.** Defined to be the parser for finite indexes of `q` and `"q"`.

#### Lean 4 source `QLambda/Composer/OpenQASMParser.lean`

```
private def parseQRef (q : Nat) : String -> Option (Fin q) :=
  parseFin q "q"
```

### 8.2.128 Definition of the parser for classical refs

**Definition.** The parser for classical refs of  $c$  is a function of type  $\text{String} \rightarrow \text{Option (Fin } c)$ .

**Construction.** Defined to be the parser for finite indexes of  $c$  and " $c$ ".

**Lean 4 source** [QLambda/Composer/OpenQASMParser.lean](#)

```
private def parseCRef (c : Nat) : String -> Option (Fin c) :=
  parseFin c "c"
```

### 8.2.129 Definition of the parser for rats

**Definition.** The parser for rats of  $s$  is an element of  $\text{Option } \mathbb{Q}$ .

**Construction.** Defined by cases on the input:  $[n] \mapsto$  the construction from an int of  $\langle \$ \rangle$  and  $n.toInt?$ ;  $[n, d] \mapsto do; \_ \mapsto \text{none}$ .

**Lean 4 source** [QLambda/Composer/OpenQASMParser.lean](#)

```
private def parseRat (s : String) : Option ? :=
  match s.splitOn "/" with
  | [n] => Rat.ofInt <$> n.toInt?
  | [n, d] => do
    let numerator <- n.toInt?
    let denominator <- d.toNat?
    if h : denominator = 0 then none
    else some (Rat.normalize numerator denominator h)
  | _ => none
```

### 8.2.130 Definition of the parser for angles

**Definition.** The parser for angles of  $s$  is an element of  $\text{Option AngleExpr}$ .

**Construction.** Defined by an explicit formula built from the starts with, the square root, the ends with and the parser for rats.

**Lean 4 source** [QLambda/Composer/OpenQASMParser.lean](#)

```
private def parseAngle (s : String) : Option AngleExpr :=
  if s.startsWith "2*acos(sqrt(" && s.endsWith ")") then do
    let body := ((s.drop 12).toString.dropEnd 2).toString
    let p <- parseRat body
    if h0 : 0 <= p then
      if h1 : p <= 1 then some (.coin <p, h0, h1>) else none
    else none
  else
    .rational <$> parseRat s
```

### 8.2.131 Definition of the without semi

**Definition.** The without semi of  $s$  is an element of `Option String`.

**Construction.** Defined to be if  $s$ .endsWith ";" then some  $(s.dropEnd 1).toString$  else none.

**Lean 4 source** [QLambda/Composer/OpenQASMParser.lean](#)

```
private def withoutSemi (s : String) : Option String :=
  if s.endsWith ";" then some (s.dropEnd 1).toString else none
```

### 8.2.132 Definition of the removal of affixes

**Definition.** The removal of affixes of  $pre$ ,  $post$  and  $s$  is an element of `Option String`.

**Construction.** Defined by an explicit formula built from the starts with, the pre-composite, the ends with and the length.

**Lean 4 source** [QLambda/Composer/OpenQASMParser.lean](#)

```
private def stripAffixes (pre post s : String) : Option String :=
  if s.startsWith pre && s.endsWith post then
    some ((s.drop pre.length).toString.dropEnd post.length).toString
  else
    none
```

### 8.2.133 Definition of the drop chars

**Definition.** The drop chars of  $pre$  and  $xs$  is an element of `Option (List Char)`.

**Construction.** Defined to be if  $pre.isPrefixOf xs$  then some  $(xs.drop pre.length)$  else none.

**Lean 4 source** [QLambda/Composer/OpenQASMParser.lean](#)

```
private def dropChars (pre xs : List Char) : Option (List Char) :=
  if pre.isPrefixOf xs then some (xs.drop pre.length) else none
```

### 8.2.134 Definition of the parser for classical chares

**Definition.** The parser for classical chares of  $c$  is a function of type  $\text{Nat} \rightarrow \text{List Char} \rightarrow \text{Option (CExpr } c \times \text{List Char)}$ .

**Construction.** Defined by cases on the input:  $0, \_ \mapsto \text{none}$ ;  $\text{fuel} + 1, xs \mapsto \text{if let some rest} := \text{dropChars "true".toList xs then; ']' :: tail} \mapsto \text{do; } \_ \mapsto \text{none}$ ;  $0 \mapsto \text{the and of lhs and rhs}$ ;  $1 \mapsto \text{the or of lhs and rhs}$ ;  $\_ \mapsto \text{the xor of lhs and rhs}$ .

**Lean 4 source** [QLambda/Composer/OpenQASMParser.lean](#)

```
private partial def parseCChars (c : Nat) :
  Nat -> List Char -> Option (CExpr c x List Char)
| 0, _ => none
| fuel + 1, xs =>
```

```

if let some rest := dropChars "true".toList xs then
  some (.lit true, rest)
else if let some rest := dropChars "false".toList xs then
  some (.lit false, rest)
else if let some rest := dropChars "c[".toList xs then
  let digits := rest.takeWhile (* != ']')
  match rest.drop digits.length with
  | ']' :: tail => do
    let i <- parseCRef c ("c[" ++ String.ofList digits ++ "]")
    pure (.bit i, tail)
  | _ => none
else if let some rest := dropChars "!(.toList xs then do
  let (e, tail) <- parseCChars c fuel rest
  let tail <- dropChars [')'] tail
  pure (.not e, tail)
else if let some rest := dropChars ['('] xs then do
  let (lhs, tail) <- parseCChars c fuel rest
  let (op, tail) <-
    if let some r := dropChars " && ".toList tail then
      some (0, r)
    else if let some r := dropChars " || ".toList tail then
      some (1, r)
    else if let some r := dropChars " != ".toList tail then
      some (2, r)
    else none
  let (rhs, tail) <- parseCChars c fuel tail
  let tail <- dropChars [')'] tail
  let e := match op with
    | 0 => .and lhs rhs
    | 1 => .or lhs rhs
    | _ => .xor lhs rhs
  pure (e, tail)
else none

```

### 8.2.135 Parse exactly the fully parenthesized Boolean expression language emitted by OpenQASM rendering

**Definition.** Parse exactly the fully parenthesized Boolean expression language emitted by `CExpr.toOpenQASM`.

**Construction.** Defined by an explicit formula built from the parser for classical chares, the length and the passage to list.

#### Lean 4 source `QLambda/Composer/OpenQASMParser.lean`

```

def parseCExpr (c : Nat) (s : String) : Option (CExpr c) := do
  let (e, rest) <- parseCChars c (s.length + 1) s.toList
  if rest = [] then some e else none

```

### 8.2.136 Definition of the parser for refs

**Definition.** The parser for refs of `q` and `s` is an element of `Option (List (Fin q))`.

**Construction.** Defined to be `if s = "" then some [] else (s.splitOn ", ").mapM (parseQRef q).`

#### Lean 4 source `QLambda/Composer/OpenQASMParser.lean`

```
private def parseRefs (q : Nat) (s : String) : Option (List (Fin q)) :=
  if s = "" then some []
  else (s.splitOn ", ").mapM (parseQRef q)
```

### 8.2.137 Parse one non-structured instruction in the interchange fragment

**Definition.** Parse one non-structured instruction in the interchange fragment.

**Construction.** Defined by an explicit formula built from the `without semi`, the passage to string, the split on and the parser for quantum refs.

#### Lean 4 source `QLambda/Composer/OpenQASMParser.lean`

```
def parseSimpleInstr (q c : Nat) (line : String) : Option (Instr q c) := do
  let s <- withoutSemi line.trimAscii.toString
  match s.splitOn " " with
  | ["x", w] => return .gate (.x ( <- parseQRef q w))
  | ["h", w] => return .gate (.h ( <- parseQRef q w))
  | ["t", w] => return .gate (.t ( <- parseQRef q w))
  | ["reset", w] => return .reset ( <- parseQRef q w)
  | ["break"] => return .break
  | ["continue"] => return .continue
  | ["cx", control, target] =>
    if !control.endsWith "," then none
    else
      return .gate (.cx
        ( <- parseQRef q (control.dropEnd 1).toString)
        ( <- parseQRef q target))
  | [lhs, "=", "measure", rhs] =>
    return .measure ( <- parseQRef q rhs) ( <- parseCRef c lhs)
  | _ =>
    if s.startsWith "ry(" then
      match s.splitOn ")" " " with
      | [angle, w] =>
        return .gate (.ry
          ( <- parseAngle (angle.dropPrefix "ry(").toString)
          ( <- parseQRef q w))
      | _ => none
    else if s.startsWith "barrier " then
      return .barrier ( <- parseRefs q (s.drop 8).toString)
    else if s.startsWith "delay[" then
      match s.splitOn "]" " " with
      | [duration, refs] =>
        if !duration.endsWith "dt" then none
        else
          let n <- ((duration.drop 6).toString.dropEnd 2).toString.toNat?
          return .delay n ( <- parseRefs q refs)
      | _ => none
    else
      match s.splitOn " = " with
```

```

| [lhs, rhs] =>
  return .store ( <- parseCRef c lhs) ( <- parseCExpr c rhs)
| _ => none

```

### 8.2.138 The inductive definition of parsed instrs

**Definition.** The inductive family of parsed instrs.

**Construction.** Generated by the rules `instr`, `whileEnd` and `whileStep`. Every element arises from finitely many applications of these rules, so properties are proved by induction over them.

**Lean 4 source** [QLambda/Composer/OpenQASMParser.lean](#)

```

private inductive ParsedInstr (q c : Nat) where
| instr : Instr q c -> ParsedInstr q c
| whileEnd : ParsedInstr q c
| whileStep : Nat -> CExpr c -> List (Instr q c) -> ParsedInstr q c

```

### 8.2.139 Definition of the finish parsed

**Definition.** The finish parsed is a function of type `List (ParsedInstr q c) → Option (List (Instr q c))`.

**Construction.** Defined by cases on the input: `[]`  $\mapsto$  the present value `[]`; `.instr i :: rest`  $\mapsto$  the return of `i`, `::, ← finishParsed rest`; `.whileStep fuel guard body :: rest`  $\mapsto$  `return .whileLoop fuel guard body :: (← finishParsed rest)`; `.whileEnd :: _`  $\mapsto$  `none`.

**Lean 4 source** [QLambda/Composer/OpenQASMParser.lean](#)

```

private def finishParsed {q c : Nat} :
  List (ParsedInstr q c) -> Option (List (Instr q c))
| [] => some []
| .instr i :: rest => return i :: (← finishParsed rest)
| .whileStep fuel guard body :: rest =>
  return .whileLoop fuel guard body :: (← finishParsed rest)
| .whileEnd :: _ => none

```

### 8.2.140 Definition of the finish while

**Definition.** The finish while of guard and body is an element of `Option (ParsedInstr q c)`.

**Construction.** Defined by cases on the input: `.whileEnd :: prefixLines`  $\mapsto$  `return .whileStep 1 guard (← finishParsed prefixLines.reverse)`; `.whileStep fuel _ :: prefixLines`  $\mapsto$  the return; `_`  $\mapsto$  `none`.

**Lean 4 source** [QLambda/Composer/OpenQASMParser.lean](#)

```

private def finishWhile {q c : Nat} (guard : CExpr c)
  (body : List (ParsedInstr q c)) : Option (ParsedInstr q c) :=
  match body.reverse with
| .whileEnd :: prefixLines =>

```



```

    return .whileStep 1 guard ( <- finishParsed prefixLines.reverse)
| .whileStep fuel _ _ :: prefixLines =>
    return .whileStep (fuel + 1) guard ( <- finishParsed prefixLines.reverse)
| _ => none

```

mutual

### 8.2.141 Definition of the parser for blocks

**Definition.** The parser for blocks of  $q$  and  $c$  is a function of type  $\text{List String} \rightarrow \text{Option (List (ParsedInstr } q \ c) \times \text{List String})}$ .

**Construction.** Defined by cases on the input:  $[] \mapsto$  the present value  $[], []$ ;  $\text{line} :: \text{rest} \mapsto$  if  $\text{line} = ""$  then.

#### Lean 4 source `QLambda/Composer/OpenQASMParser.lean`

```

private partial def parseBlock (q c : Nat) :
  List String -> Option (List (ParsedInstr q c) x List String)
| [] => some ([], [])
| line :: rest =>
  if line = "" then
    parseBlock q c rest
  else if line = "}" || line = "}" else {" then
    some ([], line :: rest)
  else do
    let (i, rest) <- parseStructuredInstr q c line rest
    let (is, rest) <- parseBlock q c rest
    pure (i :: is, rest)

```

### 8.2.142 Definition of the parser for caseses

**Definition.** The parser for caseses of  $q$  and  $c$  is a function.

**Construction.** Defined by cases on the input:  $[] \mapsto$  none;  $" " :: \text{rest} \mapsto$  the parser for caseses of  $q, c, \text{rest}; "}" :: \text{rest} \mapsto$  the present value  $[], \text{rest}; \text{line} :: \text{rest} \mapsto \text{do}; "}" :: \text{rest} \mapsto$  the present value  $\text{rest}; \_ \mapsto$  none.

#### Lean 4 source `QLambda/Composer/OpenQASMParser.lean`

```

private partial def parseCases (q c : Nat) :
  List String -> Option (List (Bool x List (Instr q c)) x List String)
| [] => none
| " " :: rest => parseCases q c rest
| "}" :: rest => some ([], rest)
| line :: rest => do
  let label <- stripAffixes "case " " {" line
  let value <- if label = "true" then some true
    else if label = "false" then some false else none
  let (body, rest) <- parseBlock q c rest
  let body <- finishParsed body
  let rest <- match rest with
  | "}" :: rest => some rest
  | _ => none

```

```

let (cases, rest) <- parseCases q c rest
pure ((value, body) :: cases, rest)

```

### 8.2.143 Definition of the parser for structured instrs

**Definition.** The parser for structured instrs is an element of `Option (ParsedInstr q c × List String)`.

**Construction.** Defined by an explicit formula built from the zero, the guard text, the removal of affixes and the parser for classical expressions.

**Lean 4 source** `QLambda/Composer/OpenQASMParser.lean`

```

private partial def parseStructuredInstr (q c : Nat)
  (line : String) (rest : List String) :
  Option (ParsedInstr q c × List String) :=
if line = "// bounded while exhausted" then
  some (.whileEnd, rest)
else if line = "// zero-iteration for loop" then
  some (.instr (.forLoop 0 []), rest)
else if let some guardText := stripAffixes "if (\" \" ) {\" line then do
  let guard <- parseCEExpr c guardText
  let (yes, rest) <- parseBlock q c rest
  match rest with
  | "}" else {" :: rest => do
    let (no, rest) <- parseBlock q c rest
    let rest <- match rest with
    | "}" :: rest => some rest
    | _ => none
    pure (.instr (.ite guard ( <- finishParsed yes) ( <- finishParsed no)), rest)
  | "}" :: rest =>
    pure ( <- finishWhile guard yes, rest)
  | _ => none
else if let some guardText := stripAffixes "switch (\" \" ) {\" line then do
  let guard <- parseCEExpr c guardText
  let (cases, rest) <- parseCases q c rest
  pure (.instr (.switch guard cases), rest)
else if let some last := stripAffixes "for uint _i in [0:\" \" ] {\" line then do
  let last <- last.toNat?
  let (body, rest) <- parseBlock q c rest
  let rest <- match rest with
  | "}" :: rest => some rest
  | _ => none
  pure (.instr (.forLoop (last + 1) ( <- finishParsed body)), rest)
else if let some label := stripAffixes "box { // \" \" \" \" line then do
  let (body, rest) <- parseBlock q c rest
  let rest <- match rest with
  | "}" :: rest => some rest
  | _ => none
  pure (.instr (.box label ( <- finishParsed body)), rest)
else
  return (.instr ( <- parseSimpleInstr q c line), rest)

```

#### 8.2.144 Definition of the parser for candidates

**Definition.** The parser for candidates of  $q, c$  and text is an element of `Option (Program .openQASM3_0_ibmComposer_2026_09 q c)`.

**Construction.** Defined by cases on the input: `version :: includeLine :: qdecl :: cdecl :: body`  $\mapsto$  if `version = "OPENQASM 3.0;"`  $\wedge$ ;  $\_ \mapsto$  none.

##### Lean 4 source `QLambda/Composer/OpenQASMParser.lean`

```
private def parseCandidate (q c : Nat) (text : String) :
  Option (Program .openQASM3_0_ibmComposer_2026_09 q c) :=
  match text.splitOn "\n" with
  | version :: includeLine :: qdecl :: cdecl :: body =>
    if version = "OPENQASM 3.0;" /\
      includeLine = "include \"stdgates.inc\";" /\
      qdecl = "qubit[" ++ toString q ++ "]" q;" /\
      cdecl = "bit[" ++ toString c ++ "]" c;" then do
      let (instructions, rest) <- parseBlock q c body
      if rest != [] then none
      let instructions <- finishParsed instructions
      pure <instructions>
    else none
  | _ => none
```

#### 8.2.145 Definition of the acceptance of rendered output

**Definition.** The acceptance of rendered output of text and  $P$  is an element of `Option (Program .openQASM3_0_ibmComposer_2026_09 q c)`.

**Construction.** Defined to be if  $P.\text{renderOpenQASM} = \text{text}$  then some  $P$  else none.

##### Lean 4 source `QLambda/Composer/OpenQASMParser.lean`

```
private def acceptRendered {q c : Nat} (text : String)
  (P : Program .openQASM3_0_ibmComposer_2026_09 q c) :
  Option (Program .openQASM3_0_ibmComposer_2026_09 q c) :=
  if P.renderOpenQASM = text then some P else none
```

#### 8.2.146 Soundness of the acceptance of rendered output

**Statement.** For natural numbers  $q, c$ : if `acceptRendered text P = some P'`, then the rendering `OpenQASM` of  $P'$  equals `text`.

**Proof.** The argument splits on the relevant condition. It follows from the definition of the acceptance of rendered output and the hypothesis that `acceptRendered text P = some P'`.

##### Lean 4 source `QLambda/Composer/OpenQASMParser.lean`

```
private theorem acceptRendered_sound {q c : Nat} {text : String}
  {P P' : Program .openQASM3_0_ibmComposer_2026_09 q c}
  (h : acceptRendered text P = some P') :
  P'.renderOpenQASM = text := by
  unfold acceptRendered at h
  split at h <;> simp_all
```

### 8.2.147 Parse the complete, structured, canonical interchange grammar documented at the top of this module

**Definition.** Parse the complete, structured, canonical interchange grammar documented at the top of this module.

**Construction.** Defined by cases on the input:  $\text{none} \mapsto \text{none}$ ;  $\text{some } P \mapsto$  the acceptance of rendered output of `text` and `P`.

**Lean 4 source** `QLambda/Composer/OpenQASMParser.lean`

```
def parseStructuredProgram (q c : Nat) (text : String) :  
  Option (Program.openQASM3_0_ibmComposer_2026_09 q c) :=  
  match parseCandidate q c text with  
  | none => none  
  | some P => acceptRendered text P
```

### 8.2.148 Exact AST boundary for two-sided render/parse round trips

**Definition.** Exact AST boundary for two-sided render/parse round trips. In particular, it excludes information erased by zero-count loops and any label containing a newline.

**Construction.** Defined to be `parseStructuredProgram q c P.renderOpenQASM = some P`.

**Lean 4 source** `QLambda/Composer/OpenQASMParser.lean`

```
def Program.ParserCanonical {q c : Nat}  
  (P : Program.openQASM3_0_ibmComposer_2026_09 q c) : Prop :=  
  parseStructuredProgram q c P.renderOpenQASM = some P
```

### 8.2.149 Exact accepted textual language

**Definition.** Exact accepted textual language. This operational definition supplements the grammar above by requiring canonical rendering byte-for-byte.

**Construction.** Defined to be  $\exists P, \text{parseStructuredProgram } q \text{ } c \text{ } \text{text} = \text{some } P$ .

**Lean 4 source** `QLambda/Composer/OpenQASMParser.lean`

```
def SupportedOpenQASMText (q c : Nat) (text : String) : Prop :=  
  exists P, parseStructuredProgram q c text = some P
```

### 8.2.150 Every accepted structured program renders back byte-for-byte

**Statement.** Every accepted structured program renders back byte-for-byte. Formally: `P.renderOpenQASM = text`.

**Proof.** By case analysis on candidate. The case of an absent cell shared by both parts cannot occur, since it contradicts the hypothesis that `parseStructuredProgram q c text = some P`; for an occupied cell, the claim is checked directly. The goal is simplified using the definition of the parser for structured programs, the hypothesis that `parseStructuredProgram q c text = some P` and the soundness of the acceptance of rendered output.

#### Lean 4 source `QLambda/Composer/OpenQASMParser.lean`

```
theorem parseStructuredProgram_render_roundTrip {q c : Nat} {text : String}
  {P : Program .openQASM3_0_ibmComposer_2026_09 q c}
  (h : parseStructuredProgram q c text = some P) :
  P.renderOpenQASM = text := by
  unfold parseStructuredProgram at h
  generalize hc : parseCandidate q c text = candidate at h
  cases candidate with
  | none => simp at h
  | some candidate =>
    exact acceptRendered_sound h
```

#### 8.2.151 On the exact canonical AST subset, parsing after rendering is identity

**Statement.** On the exact canonical AST subset, parsing after rendering is identity. Formally:  $\text{parseStructuredProgram } q \ c \ P.\text{renderOpenQASM} = \text{some } P$ .

**Proof.** This is an instance of the hypothesis that  $P.\text{ParserCanonical}$ .

#### Lean 4 source `QLambda/Composer/OpenQASMParser.lean`

```
theorem Program.parse_render_roundTrip {q c : Nat}
  (P : Program .openQASM3_0_ibmComposer_2026_09 q c)
  (h : P.ParserCanonical) :
  parseStructuredProgram q c P.renderOpenQASM = some P :=
  h
```

#### 8.2.152 The public well-formed renderer also round-trips byte-for-byte after any successful parse

**Statement.** The public well-formed renderer also round-trips byte-for-byte after any successful parse. Formally:  $P.\text{toOpenQASM } hP = \text{text}$ .

**Proof.** The goal is simplified using the definition of the OpenQASM rendering.

#### Lean 4 source `QLambda/Composer/OpenQASMParser.lean`

```
theorem parseStructuredProgram_toOpenQASM_roundTrip {q c : Nat} {text : String}
  {P : Program .openQASM3_0_ibmComposer_2026_09 q c}
  (hP : P.WellFormed)
  (h : parseStructuredProgram q c text = some P) :
  P.toOpenQASM hP = text := by
  simpa [Program.toOpenQASM] using
    (parseStructuredProgram_render_roundTrip h)
```

#### 8.2.153 Backwards-compatible name for parsing one flat instruction

**Definition.** Backwards-compatible name for parsing one flat instruction.

**Construction.** Defined to be the parser for simple instrs.

#### Lean 4 source `QLambda/Composer/OpenQASMParser.lean`

```
abbrev parseFlatInstr := parseSimpleInstr
```

### 8.2.154 Backwards-compatible entry point; it now accepts the structured grammar

**Definition.** Backwards-compatible entry point; it now accepts the structured grammar.

**Construction.** Defined to be the parser for structured programs.

**Lean 4 source** [QLambda/Composer/OpenQASMParser.lean](#)

```
abbrev parseFlatProgram := parseStructuredProgram
```

### 8.2.155 Exactly serializable probability used by the physical compiler

**Definition.** Exactly serializable probability used by the physical compiler.

**Construction.** An element consists of `val`, subject to the laws `nonneg` and `le_one`.

**Lean 4 source** [QLambda/Composer/Probability.lean](#)

```
structure Probability where
  val : ?
  nonneg : 0 <= val
  le_one : val <= 1
  deriving DecidableEq, Repr
```

### 8.2.156 Real denotation of a rational source probability

**Definition.** Real denotation of a rational source probability.

**Construction.** Defined to be the `val` of `p`.

**Lean 4 source** [QLambda/Composer/Probability.lean](#)

```
noncomputable def real (p : Probability) : ? :=
  (p.val : ?)
```

### 8.2.157 Nonnegativity of the real

**Statement.**  $0 \leq p.\text{real}$ . Formally:  $0 \leq p.\text{real}$ .

**Proof.** The claim follows directly from the definitions of the objects involved.

**Lean 4 source** [QLambda/Composer/Probability.lean](#)

```
theorem real_nonneg (p : Probability) : 0 <= p.real := by
  change (0 : ?) <= (p.val : ?)
  exact_mod_cast p.nonneg
```

### 8.2.158 The real is at most one

**Statement.**  $p.\text{real} \leq 1$ . Formally:  $p.\text{real} \leq 1$ .

**Proof.** The claim follows directly from the definitions of the objects involved.

**Lean 4 source** [QLambda/Composer/Probability.lean](#)

```

theorem real_le_one (p : Probability) : p.real <= 1 := by
  change (p.val : ?) <= (1 : ?)
  exact_mod_cast p.le_one

```

### 8.2.159 One complete fixed-register circuit

**Definition.** One complete fixed-register circuit.

**Construction.** An element consists of body.

#### Lean 4 source `QLambda/Composer/Program.lean`

```

structure Program (v : Version) (q c : Nat) where
  body : List (Instr q c)

```

### 8.2.160 Static gate side conditions not enforced by `Fin` indices

**Definition.** Static gate side conditions not enforced by `Fin` indices.

**Construction.** Defined by cases on the input: `.cx control target`  $\mapsto$  the control of  $\neq$  and `target;_`  $\mapsto$  `True`.

#### Lean 4 source `QLambda/Composer/WellFormed.lean`

```

def Gate.WellFormed {q : Nat} : Gate q -> Prop
| .cx control target => control != target
| _ => True

mutual

/-- Instruction well-formedness at a given structured-loop depth. -/
inductive Instr.WellFormedAt {q c : Nat} : Nat -> Instr q c -> Prop
| gate {depth g} :
  g.WellFormed ->
  Instr.WellFormedAt depth (.gate g)
| measure {depth qbit cbit} :
  Instr.WellFormedAt depth (.measure qbit cbit)
| reset {depth qbit} :
  Instr.WellFormedAt depth (.reset qbit)
| store {depth cbit e} :
  Instr.WellFormedAt depth (.store cbit e)
| barrier {depth qs} :
  qs.Nodup ->
  Instr.WellFormedAt depth (.barrier qs)
| delay {depth duration qs} :
  qs.Nodup ->
  Instr.WellFormedAt depth (.delay duration qs)
| ite {depth guard yes no} :
  Block.WellFormedAt depth yes ->
  Block.WellFormedAt depth no ->
  Instr.WellFormedAt depth (.ite guard yes no)
| switch {depth guard cases} :
  (cases.map Prod.fst).Nodup ->
  (forall branch in cases, Block.WellFormedAt depth branch.2) ->
  Instr.WellFormedAt depth (.switch guard cases)

```

```

| forLoop {depth count body} :
  Block.WellFormedAt (depth + 1) body ->
  Instr.WellFormedAt depth (.forLoop count body)
| whileLoop {depth fuel guard body} :
  Block.WellFormedAt (depth + 1) body ->
  Instr.WellFormedAt depth (.whileLoop fuel guard body)
| box {depth label body} :
  label != "" ->
  Block.WellFormedAt depth body ->
  Instr.WellFormedAt depth (.box label body)
/-- Every instruction of a block is well formed at the same loop depth. -/
inductive Block.WellFormedAt {q c : Nat} : Nat -> List (Instr q c) -> Prop
| nil {depth} : Block.WellFormedAt depth []
| cons {depth i is} :
  Instr.WellFormedAt depth i ->
  Block.WellFormedAt depth is ->
  Block.WellFormedAt depth (i :: is)

```

### 8.2.161 A top-level program has no unhandled structured-control transfer

**Definition.** A top-level program has no unhandled structured-control transfer.

**Construction.** Defined to be the well formed at of the body of  $P$  at 0.

**Lean 4 source** [QLambda/Composer/WellFormed.lean](#)

```

def Program.WellFormed {v q c} (P : Program v q c) : Prop :=
  Block.WellFormedAt 0 P.body

```

---

## 9 Mechanized Claims and Release Boundary

The following components are kernel checked without semantic axioms:

- source scope, typing, substitution, preservation, and progress;
- finite-register gate/reset/measurement runtime and normalization;
- pointed  $\omega$ CPO maps, products, evaluation, currying, and least fixed points;
- complete quantum-relation hom lattices and enriched composition;
- tensor/internal-hom closure and the concrete  $\text{Set-qRel}$  LNL model;
- the category of qCPOs and Scott-continuous quantum functions;
- inverse continuous shift maps for projection-chain bilimits;
- discrete qCPO instances and finite CP/gate presentations;



- Route~A fragment denotation (`FragCert.denote`), classical-bit Day comonoid contexts, closed fragment  $\beta$ /Step packaging, and measured new0 Born adequacy;
- $N$ -qubit staging interface (`UsesAtMostQubits`, `successful Elaborates  $\Rightarrow$  well-formed Composer`, `commandToOpenQASM`) and covering-set `Hom  $\Rightarrow$  CQ` quotation bridges;
- deterministic staging with resource certificates;
- circuit/Composer correspondence on the supported block fragment;
- typed lambda quotation and circuit completeness for the declared two-wire fragment;
- structured canonical OpenQASM round trips.

The theorem boundary does not include an equivalence between the checked LNL and qCPO categories, a fully instantiated denotation of every admissible recursive source type, full abstraction, or unrestricted adequacy. It also does not include noisy-device behavior or exact finite synthesis of every unitary. Missing semantic structure is not introduced as an axiom or hidden as a theorem parameter.

## 9.1 Semantic objectives

Checked progress now includes the Day bang comonoid and cofree universal property for  $A \leq 1$ , the fiber-2 TNI obstruction, the raw Route~A split-family refutation, and the failure of the global raw split-effect bound at  $A = 2$ . Half-scaling repairs the  $(2, 1)$  joint-effect matrix bound but is not a counital repair (boundary weights remain 1); the implication from `BangComultDayTransferWitness` to failure of dimension-two Day admissibility is checked; no TNI witness is constructed, and L8 instead records `AmbientCP DayBangCategory / day_bang_l8_resolved_by_ambientCP_replacement`. The finite CP maps, TNI superoperators, representable Yoneda/Day fragment, first-order type objects,  $A \leq 1$  bang/cofreeness, Route~A/global-bound refutations, ambient-CP Gate~8 replacement, and primitive agreement are checked; they are not an all-dimensional LNL instance or full-language denotation. The minimum fragment (first-order data, linear FO-domain arrows, unrestricted bit binders, primitives, measurement) has a checked Route~A `PresheafFragmentModel`, compositional `FragCert.denote` via controlled `ite Elim`, classical-bit Day comonoid contexts with Day/FO closed  $\beta/\eta$ , closed FO `ite`, closed linear and unrestricted identity  $\beta$ , closed unpair  $\beta$ , constant unrestricted subst  $\beta$ , Step congruence / `fragment_step_denote_sound_complete`, measured new0 Born adequacy (`FragmentMeasuredSimulation`), and the  $N$ -qubit packaging theorem `n_qubit_fragment_denotation_openqasm_interface` (`UsesAtMostQubits`, `successful Elaborates  $\Rightarrow$  well-formed Composer`, `commandToOpenQASM`). Hom-side quote spines and `interpretQuoteSpine / interpretQuoteSpineExt` identify `FragCert.denote` with ideal `CQ.Sem` for `skip/x/h` and a covering set of Quotable forms (`t/reset/measure/seq-skip`; branch via `interpretQuoteHom` packaging). Remaining Quotable constructors without dedicated Hom spines and undecidable arbitrary `Hom  $\rightarrow$  CQ` extract stay open; `Track~L / bang` are independent. The concrete physical-bit copy/discard is not counital; `classicalBitModule` is the unrestricted carrier with checked comonoid laws. `Track L` packages are deferred on L9: relative `AmbientCP` admissibility for  $A \leq 1$ , a degree-row gate at 2, and `AmbientCPComonoid` packaging for  $A \leq 1$  are checked;  $A=1$ -style glue is blocked by `$\neg$ BangDegreeUnitRectangleHasSum 2`, so glued `BangComultAmbientCP Admissible 2` remains open (absolute  $A=2$  not claimed).

## 9.2 Palomar compared statements

`comparator.json` selects 29 theorems. `Challenge.lean` imports only `Mathlib`. Source syntax is restated. `Runtime`, `relation`, `presheaf`, `staging`, and `OpenQASM` carriers are definition holes, and every compared proof is sorry. `Solution.lean` fills those holes with the library constants and proves the same statements. The statements are:

### Lean 4 source

```
theorem source_type_safety {M : Term} {A : Ty} (h : HasType [] [] M A) :
  MakesProgress M /\
    (forall N, Step M N -> HasType [] [] N A) /\
    (forall b N, MeasStep M b N -> HasType [] [] N A) /\
    (forall N_1 N_2, Step M N_1 -> Step M N_2 -> N_1 = N_2)

theorem quotation_capstone
  (C : Command quantumSize classicalSize) (hC : Quotable C) :
  HasType [] [] (Quotation.reflect C hC).term quotationTy /\
  (Quotation.reflect C hC).compile = C

theorem runtime_born_normalizes {q : Nat} (? : RuntimeRegister q) (w : Fin q) :
  runtimeMeasureProbability ? w false + runtimeMeasureProbability ? w true = 1

theorem runtime_internal_preservation {q : Nat} {s s' : RuntimeConfig q} {A : Ty}
  (ht : runtimeWellTyped s A) (hs : runtimeInternalStep s s') :
  runtimeWellTyped s' A

theorem runtime_measurement_preservation {q : Nat} {s s' : RuntimeConfig q}
  {weight : Real} {outcome : Bool} {A : Ty}
  (ht : runtimeWellTyped s A)
  (hs : runtimeMeasurementStep s weight outcome s') :
  runtimeWellTyped s' A

theorem runtime_progress {q : Nat} {s : RuntimeConfig q} {A : Ty}
  (ht : runtimeWellTyped s A) :
  runtimeNormal s \/ runtimeOutOfWires s \/
  (exists s', runtimeInternalStep s s') \/
  (exists weight outcome s', runtimeMeasurementStep s weight outcome s')

theorem quantumRel_assoc {X Y Z W : QuantumSet}
  (T : QuantumRel Z W) (S : QuantumRel Y Z) (R : QuantumRel X Y) :
  relComp (relComp T S) R = relComp T (relComp S R)

theorem quantumRel_dagger_comp {X Y Z : QuantumSet}
  (S : QuantumRel Y Z) (R : QuantumRel X Y) :
  relDagger (relComp S R) = relComp (relDagger R) (relDagger S)

theorem quantumRel_comp_iSup_left {X Y Z : QuantumSet}
  (S : Nat -> QuantumRel Y Z) (R : QuantumRel X Y) :
  relComp (relISup S) R = relISup (fun n => relComp (S n) R)

theorem quantumRel_comp_iSup_right {X Y Z : QuantumSet}
  (S : QuantumRel Y Z) (R : Nat -> QuantumRel X Y) :
  relComp S (relISup R) = relISup (fun n => relComp S (R n))

theorem quantumRel_id_comp {X Y : QuantumSet} (hY : quantumDecEq Y)
```

```

(R : QuantumRel X Y) :
relComp (relId Y hY) R = R

theorem quantumRel_comp_id {X Y : QuantumSet} (hX : quantumDecEq X)
(R : QuantumRel X Y) :
relComp R (relId X hX) = R

theorem qubit_isQuantumCPO : isQuantumCPO qubitPoset

theorem set_qRel_linear_objects : modelLinearObjects = qRelObjects

theorem qCPO_category_objects : qCPOCategoryObjects = quantumCPOCarrier

theorem shift_forward_backward {C : ProjChain} (x : TailPoint C) :
shiftForward (shiftBackward x) = x

theorem shift_backward_forward {C : ProjChain} (x : ChainPoint C) :
shiftBackward (shiftForward x) = x

theorem prim_cp_agreement (p : Prim) :
primSuperoperator p = primCompletedCP p

theorem cx_cp_agreement : primSuperoperator .cx = primCompletedCP .cx

theorem measure_elim_denotation :
denoteClosedMeasureNew0 = measureElimClosedNew0

theorem staging_deterministic {q c fuel : Nat} {M : Term}
{P Q : StagingResult q c M}
(hP : StagingSucceeds fuel P) (hQ : StagingSucceeds fuel Q) : P = Q

theorem staging_well_formed {q c fuel : Nat} {M : Term}
{P : StagingResult q c M} (h : StagingSucceeds fuel P) :
stagingWellFormed P

theorem staging_compile_agreement {q c fuel : Nat} {M : Term}
{P : StagingResult q c M} (h : StagingSucceeds fuel P)
(model : CircuitModel q c) :
circuitAgrees (stagedDenotation P model) (compiledDenotation P model)

theorem openqasm_render_roundTrip {q c : Nat} {text : String}
{P : OpenQASMProgram q c} (h : parseOpenQASM q c text = some P) :
renderOpenQASM P = text

theorem openqasm_export_roundTrip {q c : Nat} {text : String}
{P : OpenQASMProgram q c} (hP : openQASMWellFormed P)
(h : parseOpenQASM q c text = some P) :
exportOpenQASM P hP = text

theorem measured_new0_born_false :
runtimeMeasureProbability ketZeroRegister (0 : Fin 1) false = 1

theorem measured_new0_born_true :
runtimeMeasureProbability ketZeroRegister (0 : Fin 1) true = 0

theorem measured_new0_within_bound (N : Nat) (hN : 1 <= N) :

```

```

measuredNew0Within N


theorem measure_branch_agrees (b : Bool) :
  fragmentMeasureBranch b = yonedaMeasureBranch b

```

MakesProgress is a value, a classical Step, or QuantumBlocked. quotationTy is the canonical curried type of one unrestricted bit and two linear qubits. The library theorem Command.GeneralQuotation.Quotation.quotation\_capstone adds the conjunct  $CQ.Eq ((reflect\ C\ h\ C).denote\ model)\ (C.denote\ model)$  for a Composer.Model. That conjunct is kernel-checked and is not part of  $QLambda.Palomar.quotation\_capstone$ .


Solution defines the holes as follows. RuntimeRegister is RegisterState, runtimeMeasureProbability is RegisterState.measureProbability, and the configuration, typing, and step holes are Config, Config.WellTyped, InternalStep, MeasurementStep, Config.Normal, and Config.OutOfWires. QuantumSet, QuantumRel, relComp, relDagger, and relId are the domain quantum-relation operations; relISup is iSup; qubitPoset is QuantumPoset.qubit; isQuantumCPO is IsQuantumCPO; modelLinearObjects is quantumLNL.linear.Obj; qRelObjects is qRelCategory.Obj; qCPOCategoryObjects is qCPOCategory.Obj; quantumCPOCarrier is QuantumCPO. ProjChain is ProjectionChain, with ChainPoint its bilimit and TailPoint the tail bilimit. primSuperoperator is (superoperator p).cp.toCompleted and primCompletedCP is completedCP p. denoteClosedMeasureNew0 is FragCert.denote closed\_measure\_new0\_cert, and measureElimClosedNew0 is the measureElim spine in fragment\_measured\_observable\_adequacy. StagingSucceeds is Elaborates, stagingWellFormed is command well-formedness, and circuitAgrees is  $CQ.Eq$  of denoteBlock on the compiled block and command.denote. parseOpenQASM is parseStructuredProgram for the declared IBM Composer OpenQASM 3 version. ketZeroRegister is registerKetZero, measuredNew0Within is UsesAtMostQubits of measureNew0Program, and the branch holes are routeAfragmentModel.measureBranch and measureBranchYoneda. The Born and bound facts are the corresponding conjuncts of fragment\_measured\_observable\_adequacy.

### 9.3 Claim-surface dependence

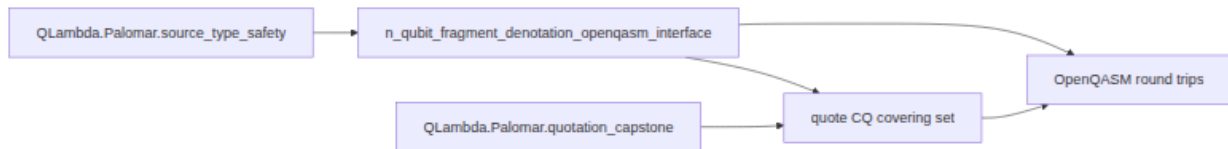

**Figure 16:** Section 9 claim-surface dependence. The Comparator selects the

29  $QLambda.Palomar$  theorems in `comparator.json`, including source type safety, quotation typing and compile reflection, measured-new0 Born masses, the measureElim equation, and the OpenQASM round trips. `n_qubit_fragment_denotation_openqasm_interface` remains a library packaging theorem and is not compared.

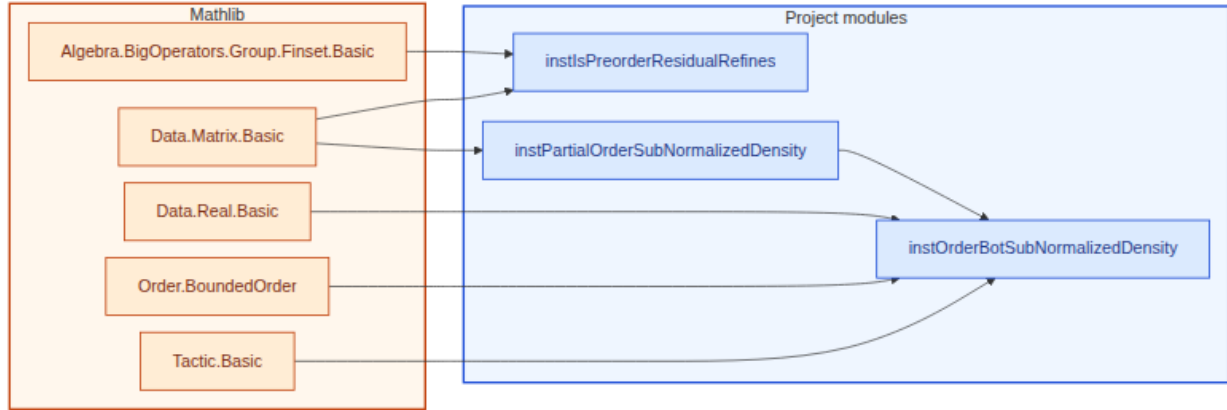

**Figure 17:** Lean module dependencies for §9 (supporting primitives). Amber box: Mathlib imports (5 listed). Blue box: project modules (3).

## 9.4 Blueprint declarations — Supporting quantum primitives

*Auto-generated from the Lean sources (7 declarations). Each card states the result in mathematical English and explains the idea of its proof or construction; the Lean source follows each card.*

### 9.4.1 Preorder property on Kraus families

**Definition.** Equip  $(\text{KrausFamily } n \ m) \ \text{ResidualRefines}$  with its canonical preorder property.

**Construction.** The operations are given by: reflexivity. Each required law follows from the corresponding property of the underlying data.

#### Lean 4 source `QLambda/instIsPreorderResidualRefines.lean`

```
instance instIsPreorderResidualRefines :
  IsPreorder (KrausFamily n m) ResidualRefines where
  refl := residualRefines_refl
  trans _ _ _ := residualRefines_trans
```

### 9.4.2 Least element on subnormalized density matrices

**Definition.** Equip  $\text{SubNormalizedDensity } n$  with its canonical least element.

**Construction.** The operations are given by: bottom element. Each required law follows from the corresponding property of the underlying data.

#### Lean 4 source `QLambda/instOrderBotSubNormalizedDensity.lean`

```
instance instOrderBotSubNormalizedDensity : OrderBot (SubNormalizedDensity n) where
  bot := <0, PosSemidef.zero, by simp [Matrix.trace_zero]>
  bot_le ? := by
    change (? .mat - 0).PosSemidef
    simp using ?.posSemidef
```

### 9.4.3 Underlying matrix of the bottom element

**Statement.**  $\perp.\text{mat} = 0$ . Formally:  $\perp.\text{mat} = 0$ .

**Proof.** By definition: the left-hand side,  $\perp.\text{mat}$ , and the right-hand side,  $0$ , unfold to the same term.

**Lean 4 source** [QLambda/instOrderBotSubNormalizedDensity.lean](#)

```
theorem mat_bot : (False : SubNormalizedDensity n).mat = 0 := rfl
```

### 9.4.4 Monotonicity of the spectral erosion

**Statement.** For a real number  $t$ : if  $0 \leq t$  and  $\rho \leq \sigma$ , then  $\text{spectralErode } t \ \rho \leq \text{spectralErode } t \ \sigma$ .

**Proof.** The key step rewrites with the spectral erosion of the underlying matrix and the usual algebraic identities.

**Lean 4 source** [QLambda/instOrderBotSubNormalizedDensity.lean](#)

```
theorem spectralErode_mono {t : ?} (_ht : 0 <= t) {? sigma : SubNormalizedDensity n}
  (h : ? <= sigma) : spectralErode t ? <= spectralErode t sigma := by
  change ((spectralErode t sigma).mat - (spectralErode t ?).mat).PosSemidef
  have : (spectralErode t sigma).mat - (spectralErode t ?).mat =
    spectralScale t * (sigma.mat - ?.mat) := by
    simp [spectralErode_mat, smul_sub]
  rw [this]
  exact (le_iff.mp h).smul (spectralScale_nonneg t)
```

### 9.4.5 Loewner order: $\rho \leq \sigma$ iff $\sigma - \rho$ is positive semidefinite

**Definition.** Loewner order:  $\rho \leq \sigma$  iff  $\sigma - \rho$  is positive semidefinite.

**Construction.** Given by the displayed expression.

**Lean 4 source** [QLambda/instPartialOrderSubNormalizedDensity.lean](#)

```
instance instPartialOrderSubNormalizedDensity : PartialOrder (SubNormalizedDensity n)
  where
  le ? sigma := ?.mat <= sigma.mat
  le_refl ? := le_refl ?.mat
  le_trans ? sigma tau := le_trans
  le_antisymm ? sigma h?sigma hsigma? := ext (le_antisymm h?sigma hsigma?)
```

### 9.4.6 Definition of the order for subnormalized density matrices

**Statement.**  $\rho \leq \sigma$  if and only if  $\rho.\text{mat} \leq \sigma.\text{mat}$ . Formally:  $\rho \leq \sigma \leftrightarrow \rho.\text{mat} \leq \sigma.\text{mat}$ .

**Proof.** Both sides are the same proposition once the definitions are unfolded.

**Lean 4 source** [QLambda/instPartialOrderSubNormalizedDensity.lean](#)

```
theorem le_def {? sigma : SubNormalizedDensity n} :
  ? <= sigma <-> ?.mat <= sigma.mat :=
  Iff.rfl
```


### 9.4.7 Characterization of the order for subnormalized density matrices

**Statement.**  $\rho \leq \sigma$  if and only if  $\sigma.\text{mat} - \rho.\text{mat}$  is positive semidefinite.

**Proof.** Both sides are the same proposition once the definitions are unfolded.

**Lean 4 source** [QLambda/instPartialOrderSubNormalizedDensity.lean](#)

```
theorem le_iff {? sigma : SubNormalizedDensity n} :
  ? <= sigma <-> (sigma.mat - ?.mat).PosSemidef :=
  Iff.rfl
```

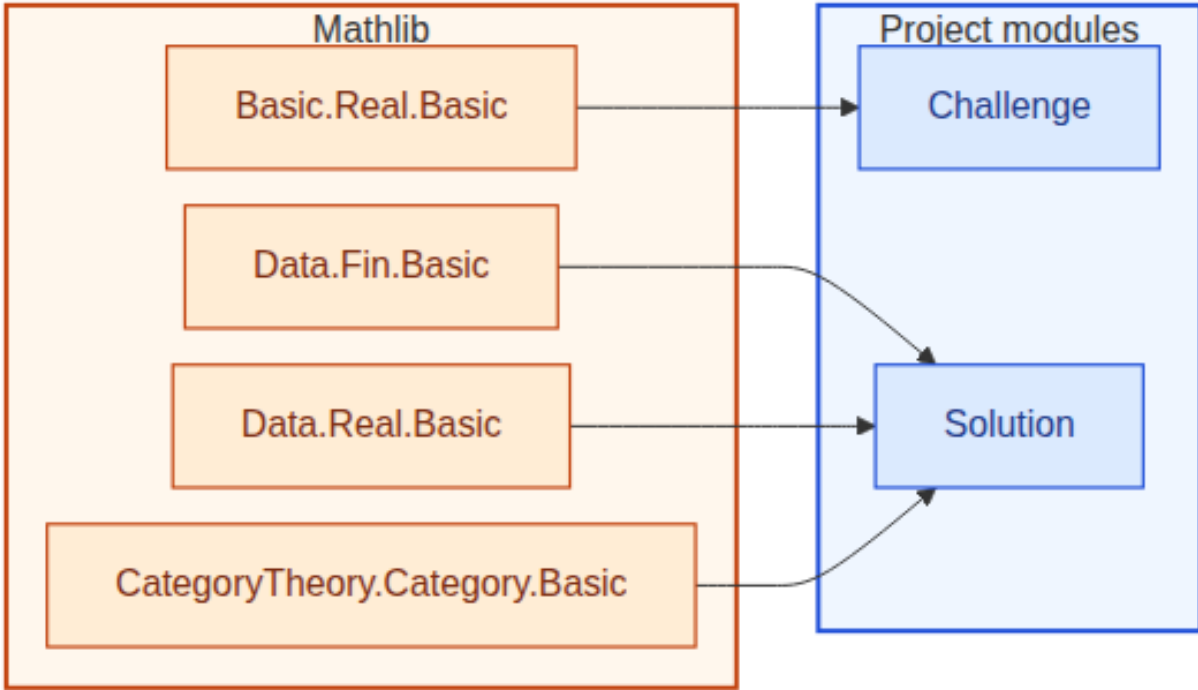

**Figure 18:** Lean module dependencies for Palomar challenge / solution. Amber box: Mathlib imports (4 listed). Blue box: project modules (2).

## 9.5 Blueprint declarations — Palomar challenge and solution

*Auto-generated from the Lean sources (213 declarations). Each card states the result in mathematical English and explains the idea of its proof or construction; the Lean source follows each card.*

### 9.5.1 `lin` is exactly-once use

**Definition.** `lin` is exactly-once use. `unres` is ordinary  $\lambda$ -calculus use.

**Construction.** Generated by the rules `lin` and `unres`. Every element arises from finitely many applications of these rules, so properties are proved by induction over them.

**Lean 4 source** [Challenge.lean](#)

```

inductive Mode where
| lin
| unres
deriving DecidableEq, Repr

```

### 9.5.2 Types

**Definition.** Types.  $\mu A$  binds de Bruijn type variable 0 in  $A$ .

**Construction.** Generated by the rules `var`, `unit`, `bit`, `qubit`, `tensor`, `arrow` and `mu`. Every element arises from finitely many applications of these rules, so properties are proved by induction over them.

#### Lean 4 source Challenge.lean

```

inductive Ty where
| var : Nat -> Ty
| unit
| bit
| qubit
| tensor : Ty -> Ty -> Ty
| arrow : Mode -> Ty -> Ty -> Ty
| mu : Ty -> Ty
deriving DecidableEq, Repr

```

### 9.5.3 Shift free type variables by $d$ at or above cutoff

**Definition.** Shift free type variables by  $d$  at or above cutoff.

**Construction.** Defined by cases on the input:  $\text{.var } i \mapsto$  the variable of  $i$  if  $i < \text{cutoff}$  then  $i$  else  $i + d$ ;  $\text{.unit} \mapsto$  the unit;  $\text{.bit} \mapsto$  the bit;  $\text{.qubit} \mapsto$  the qubit;  $\text{.tensor } A \ B \mapsto$  the tensor product of the shift of  $d, \text{cutoff}, A$  and the shift of  $d, \text{cutoff}, B$ ;  $\text{.arrow } \kappa \ A \ B \mapsto$  the function type of  $\kappa$ , the shift of  $d, \text{cutoff}, A$ , the shift of  $d, \text{cutoff}, B$ ;  $\text{.mu } A \mapsto$  the recursive type of the shift of  $d, \text{cutoff} + 1, A$ .

#### Lean 4 source Challenge.lean

```

def shift (d cutoff : Nat) : Ty -> Ty
| .var i => .var (if i < cutoff then i else i + d)
| .unit => .unit
| .bit => .bit
| .qubit => .qubit
| .tensor A B => .tensor (shift d cutoff A) (shift d cutoff B)
| .arrow ? A B => .arrow ? (shift d cutoff A) (shift d cutoff B)
| .mu A => .mu (shift d (cutoff + 1) A)

```

### 9.5.4 Substitute $\sigma$ for type variable $n$ , lowering variables above it

**Definition.** Substitute  $\sigma$  for type variable  $n$ , lowering variables above it.

**Construction.** Defined by cases on the input:  $\text{.var } i \mapsto$  if  $i < n$  then  $\text{.var } i$ ;  $\text{.unit} \mapsto$  the unit;  $\text{.bit} \mapsto$  the bit;  $\text{.qubit} \mapsto$  the qubit;  $\text{.tensor } A \ B \mapsto$  the tensor product of the substitution



of  $n, \sigma, A$  and the substitution of  $n, \sigma, B$ ;  $\text{.arrow } \kappa \ A \ B \mapsto$  the function type of  $\kappa$ , the substitution of  $n, \sigma, A$ , the substitution of  $n, \sigma, B$ ;  $\text{.mu } A \mapsto$  the recursive type of the substitution of  $n + 1, \sigma, A$ .

#### Lean 4 source Challenge.lean

```
def subst (n : Nat) (sigma : Ty) : Ty -> Ty
| .var i =>
  if i < n then .var i
  else if i = n then shift n 0 sigma
  else .var (i - 1)
| .unit => .unit
| .bit => .bit
| .qubit => .qubit
| .tensor A B => .tensor (subst n sigma A) (subst n sigma B)
| .arrow ? A B => .arrow ? (subst n sigma A) (subst n sigma B)
| .mu A => .mu (subst (n + 1) sigma A)
```

### 9.5.5 Gate and allocation constants

**Definition.** Gate and allocation constants. Measurement is its own elimination form.

**Construction.** Generated by the rules `new0` (fresh-qubit allocation), `x` (the Pauli-X gate), `h` (the Hadamard gate), `t` (the T gate), `ry` (a Y-rotation), `cx` (the controlled-NOT gate) and `reset` (reset). Every element arises from finitely many applications of these rules, so properties are proved by induction over them.

#### Lean 4 source Challenge.lean

```
inductive Prim where
| new0
| x
| h
| t
| ry : ? -> Prim
| cx
| reset
deriving DecidableEq, Repr
```

### 9.5.6 Type of a primitive as a linear function

**Definition.** Type of a primitive as a linear function.

**Construction.** Defined by cases on the input:  $\text{.new0} \mapsto$  the function type of a linear, a unit, a qubit;  $\text{.x} \mapsto$  the function type of a linear, a qubit, a qubit;  $\text{.h} \mapsto$  the function type of a linear, a qubit, a qubit;  $\text{.t} \mapsto$  the function type of a linear, a qubit, a qubit;  $\text{.ry } \_ \mapsto$  the function type of a linear, a qubit, a qubit;  $\text{.cx} \mapsto$  the function type of a linear, a qubit, the function type of a linear, a qubit,  $\text{.tensor } \text{.qubit } \text{.qubit}$ ;  $\text{.reset} \mapsto$  the function type of a linear, a qubit, a qubit.

#### Lean 4 source Challenge.lean

```
def primTy : Prim -> Ty
| .new0 => .arrow .lin .unit .qubit
| .x => .arrow .lin .qubit .qubit
```

```

| .h => .arrow .lin .qubit .qubit
| .t => .arrow .lin .qubit .qubit
| .ry _ => .arrow .lin .qubit .qubit
| .cx => .arrow .lin .qubit (.arrow .lin .qubit (.tensor .qubit .qubit))
| .reset => .arrow .lin .qubit .qubit

```

### 9.5.7 Annotated terms

**Definition.** Annotated terms. Variable indices are de Bruijn indices in the context of their mode.

**Construction.** Generated by the rules `var`, `lam`, `app`, `unit`, `bitLit`, `pair`, `unpair`, `ite`, `prim`, `measure`, `fix` and `fold`. Every element arises from finitely many applications of these rules, so properties are proved by induction over them.

#### Lean 4 source Challenge.lean

```

inductive Term where
| var : Mode -> Nat -> Term
| lam : Mode -> Ty -> Term -> Term
| app : Term -> Term -> Term
| unit
| bitLit : Bool -> Term
| pair : Term -> Term -> Term
| unpair : Term -> Term -> Term
| ite : Term -> Term -> Term -> Term
| prim : Prim -> Term
| measure : Term -> Term -> Term
| fix : Ty -> Term -> Term
| fold : Ty -> Term -> Term
| unfold : Term -> Term
deriving DecidableEq, Repr

```

### 9.5.8 Source values for call-by-value

**Definition.** Source values for call-by-value. Qubits are not closed values; they are wires.

**Construction.** Generated by the rules `unit`, `bitLit`, `lam`, `pair`, `prim` and `fold`. Every element arises from finitely many applications of these rules, so properties are proved by induction over them.

#### Lean 4 source Challenge.lean

```

inductive Value : Term -> Prop where
| unit : Value .unit
| bitLit {b} : Value (.bitLit b)
| lam {? A M} : Value (.lam ? A M)
| pair {M N} : Value M -> Value N -> Value (.pair M N)
| prim {p} : Value (.prim p)
| fold {A M} : Value M -> Value (.fold A M)

```

### 9.5.9 Proof-level scoping judgment for type variables

**Definition.** Proof-level scoping judgment for type variables.

**Construction.** Defined by cases on the input:  $n, \text{.var } i \mapsto \text{the } i \text{ of } < \text{ and } n; \_, \text{.unit} \mapsto \text{True}; \_, \text{.bit} \mapsto \text{True}; \_, \text{.qubit} \mapsto \text{True}; n, \text{.tensor } A \ B \mapsto \text{WellScopedAt } n \ A \wedge \text{WellScopedAt } n \ B; n, \text{.arrow } \_ \ A \ B \mapsto \text{WellScopedAt } n \ A \wedge \text{WellScopedAt } n \ B; n, \text{.mu } A \mapsto \text{the well-scopedness of the sum of } n \text{ and } 1 \text{ and } A$ .

#### Lean 4 source Challenge.lean

```
def WellScopedAt : Nat -> Ty -> Prop
| n, .var i => i < n
| _, .unit => True
| _, .bit => True
| _, .qubit => True
| n, .tensor A B => WellScopedAt n A /\ WellScopedAt n B
| n, .arrow _ A B => WellScopedAt n A /\ WellScopedAt n B
| n, .mu A => WellScopedAt (n + 1) A
```

### 9.5.10 The type variable selected by target does not occur in the type

**Definition.** The type variable selected by target does not occur in the type.

**Construction.** Defined by cases on the input:  $\text{target}, \text{.var } i \mapsto \text{the } i \text{ of } \neq \text{ and } \text{target}; \_, \text{.unit} \mapsto \text{True}; \_, \text{.bit} \mapsto \text{True}; \_, \text{.qubit} \mapsto \text{True}; \text{target}, \text{.tensor } A \ B \mapsto \text{DoesNotContainAt target } A \wedge \text{DoesNotContainAt target } B; \text{target}, \text{.arrow } \_ \ A \ B \mapsto \text{DoesNotContainAt target } A \wedge \text{DoesNotContainAt target } B; \text{target}, \text{.mu } A \mapsto \text{the absence of the recursion variable of the sum of target and } 1 \text{ and } A$ .

#### Lean 4 source Challenge.lean

```
def DoesNotContainAt : Nat -> Ty -> Prop
| target, .var i => i != target
| _, .unit => True
| _, .bit => True
| _, .qubit => True
| target, .tensor A B =>
  DoesNotContainAt target A /\ DoesNotContainAt target B
| target, .arrow _ A B =>
  DoesNotContainAt target A /\ DoesNotContainAt target B
| target, .mu A => DoesNotContainAt (target + 1) A
```

### 9.5.11 Strict positivity of the selected recursive variable

**Definition.** Strict positivity of the selected recursive variable: it may occur in products and function codomains, but not in function domains.

**Construction.** Defined by cases on the input:  $\_, \text{.var } \_ \mapsto \text{True}; \_, \text{.unit} \mapsto \text{True}; \_, \text{.bit} \mapsto \text{True}; \_, \text{.qubit} \mapsto \text{True}; \text{target}, \text{.tensor } A \ B \mapsto \text{StrictlyPositiveAt target } A \wedge \text{StrictlyPositiveAt target } B; \text{target}, \text{.arrow } \_ \ A \ B \mapsto \text{DoesNotContainAt target } A \wedge \text{StrictlyPositiveAt target } B; \text{target}, \text{.mu } A \mapsto \text{the strict positivity of the sum of target and } 1 \text{ and } A$ .

#### Lean 4 source Challenge.lean

```

def StrictlyPositiveAt : Nat -> Ty -> Prop
| _, .var _ => True
| _, .unit => True
| _, .bit => True
| _, .qubit => True
| target, .tensor A B =>
  StrictlyPositiveAt target A /\ StrictlyPositiveAt target B
| target, .arrow _ A B =>
  DoesNotContainAt target A /\ StrictlyPositiveAt target B
| target, .mu A => StrictlyPositiveAt (target + 1) A

```

### 9.5.12 Every recursive body in a type is strictly positive in its own binder

**Definition.** Every recursive body in a type is strictly positive in its own binder.

**Construction.** Defined by cases on the input:  $\text{.mu } A \mapsto \text{StrictlyPositiveAt } 0 \ A \wedge \text{PositiveRec } A$ ;  $\text{.var } _ \mapsto \text{True}$ ;  $\text{.unit} \mapsto \text{True}$ ;  $\text{.bit} \mapsto \text{True}$ ;  $\text{.qubit} \mapsto \text{True}$ ;  $\text{.tensor } A \ B \mapsto \text{PositiveRec } A \wedge \text{PositiveRec } B$ ;  $\text{.arrow } _ \ A \ B \mapsto \text{PositiveRec } A \wedge \text{PositiveRec } B$ .

#### Lean 4 source Challenge.lean

```

def PositiveRec : Ty -> Prop
| .mu A => StrictlyPositiveAt 0 A /\ PositiveRec A
| .var _ => True
| .unit => True
| .bit => True
| .qubit => True
| .tensor A B => PositiveRec A /\ PositiveRec B
| .arrow _ A B => PositiveRec A /\ PositiveRec B

```

### 9.5.13 A type is admissible at depth n when it is scoped there and every recursive body in it is strictly positive

**Definition.** A type is admissible at depth n when it is scoped there and every recursive body in it is strictly positive.

**Construction.** Defined to be  $\text{WellScopedAt } n \ A \wedge \text{PositiveRec } A$ .

#### Lean 4 source Challenge.lean

```

def AdmissibleAt (n : Nat) (A : Ty) : Prop :=
  WellScopedAt n A /\ PositiveRec A

```

### 9.5.14 Closed, admissible types

**Definition.** Closed, admissible types.

**Construction.** Defined to be the admissibility at a position of A at 0.

#### Lean 4 source Challenge.lean

```
abbrev Admissible (A : Ty) : Prop :=
  AdmissibleAt 0 A
```

### 9.5.15 Duplicability relative to recursive type variables: qubits and linear functions are not duplicable

**Definition.** Duplicability relative to recursive type variables: qubits and linear functions are not duplicable; free variables are duplicable only when marked.

**Construction.** Defined by cases on the input:  $\kappa$ ,  $\text{.var } i \mapsto \kappa[i]? = \text{some true}; \_, \text{.unit} \mapsto \text{True}; \_, \text{.bit} \mapsto \text{True}; \_, \text{.qubit} \mapsto \text{False}; \kappa, \text{.tensor } A \ B \mapsto \text{DuplicableAt } \kappa \ A \wedge \text{DuplicableAt } \kappa \ B; \_, \text{.arrow .lin } \_ \_ \mapsto \text{False}; \_, \text{.arrow .unres } \_ \_ \mapsto \text{True}; \kappa, \text{.mu } A \mapsto \text{the duplicability at a position of the true of } :: \text{ and } \kappa \text{ and } A$ .

#### Lean 4 source Challenge.lean

```
def DuplicableAt : List Bool -> Ty -> Prop
| ?, .var i => ?[i]? = some true
| _, .unit => True
| _, .bit => True
| _, .qubit => False
| ?, .tensor A B => DuplicableAt ? A /\ DuplicableAt ? B
| _, .arrow .lin _ _ => False
| _, .arrow .unres _ _ => True
| ?, .mu A => DuplicableAt (true :: ?) A
```

### 9.5.16 Closed types whose values may be copied and discarded

**Definition.** Closed types whose values may be copied and discarded.

**Construction.** Defined to be the duplicability at a position of  $[]$  and  $A$ .

#### Lean 4 source Challenge.lean

```
abbrev Duplicable (A : Ty) : Prop :=
  DuplicableAt [] A
```

### 9.5.17 Positional lookup in a context

**Definition.** Positional lookup in a context.

**Construction.** Generated by the rules `zero` (a lookup at the head) and `succ` (a lookup in the tail). Every element arises from finitely many applications of these rules, so properties are proved by induction over them.

#### Lean 4 source Challenge.lean

```
inductive Lookup {a : Type} : List a -> Nat -> a -> Prop where
| zero {a xs} : Lookup (a :: xs) 0 a
| succ {b xs n a} : Lookup xs n a -> Lookup (b :: xs) (n + 1) a
```

### 9.5.18 Every cell is absent, so the term uses no linear variable

**Definition.** Every cell is absent, so the term uses no linear variable.

**Construction.** Defined by cases on the input:  $[] \mapsto \text{True}$ ;  $\text{none} :: \Delta \mapsto$  the empty usage mask of  $\Delta$ ;  $\text{some } _ :: _ \mapsto \text{False}$ .

#### Lean 4 source Challenge.lean

```
def AllNone : List (Option Ty) -> Prop
| [] => True
| none :: Delta => AllNone Delta
| some _ :: _ => False
```

### 9.5.19 The only occupied cell of a linear context is index n

**Definition.** The only occupied cell of a linear context is index n.

**Construction.** Defined by cases on the input:  $[], _ \mapsto \text{True}$ ;  $\text{some } _ :: \Delta, 0 \mapsto$  the empty usage mask of  $\Delta$ ;  $\text{none} :: _, 0 \mapsto \text{False}$ ;  $\text{some } _ :: _, _ + 1 \mapsto \text{False}$ ;  $\text{none} :: \Delta, n + 1 \mapsto$  the single-cell usage mask of  $\Delta$  and n.

#### Lean 4 source Challenge.lean

```
def OnlySomeAt : List (Option Ty) -> Nat -> Prop
| [], _ => True
| some _ :: Delta, 0 => AllNone Delta
| none :: _, 0 => False
| some _ :: _, _ + 1 => False
| none :: Delta, n + 1 => OnlySomeAt Delta n
```

### 9.5.20 A use-respecting partition of a linear context

**Definition.** A use-respecting partition of a linear context.

**Construction.** Generated by the rules `nil` (the empty split), `none` (an absent cell shared by both parts), `left` (an occupied cell sent to the left part) and `right` (an occupied cell sent to the right part). Every element arises from finitely many applications of these rules, so properties are proved by induction over them.

#### Lean 4 source Challenge.lean

```
inductive OSplit :
  List (Option Ty) -> List (Option Ty) -> List (Option Ty) -> Prop where
| nil : OSplit [] [] []
| none {Delta Delta_1 Delta_2} :
  OSplit Delta Delta_1 Delta_2 -> OSplit (none :: Delta) (none :: Delta_1) (none
  :: Delta_2)
| left {A Delta Delta_1 Delta_2} :
  OSplit Delta Delta_1 Delta_2 -> OSplit (some A :: Delta) (some A :: Delta_1) (
  none :: Delta_2)
| right {A Delta Delta_1 Delta_2} :
  OSplit Delta Delta_1 Delta_2 -> OSplit (some A :: Delta) (none :: Delta_1) (
  some A :: Delta_2)
```

### 9.5.21 Typing judgement of $\Gamma$ and $\Delta$ and $M$ and $A$

**Definition.**  $\text{HasType } \Gamma \Delta M A$ :  $M$  has type  $A$ , uses exactly the occupied cells of the linear context  $\Delta$ , and may use the unrestricted context  $\Gamma$  freely.

**Construction.** Generated by the rules  $\text{varU}$ ,  $\text{varL}$ ,  $\text{lamU}$ ,  $\text{lamL}$ ,  $\text{appL}$ ,  $\text{appU}$ ,  $\text{unit}$ ,  $\text{bitLit}$ ,  $\text{pair}$ ,  $\text{unpair}$ ,  $\text{ite}$  and  $\text{prim}$ . Every element arises from finitely many applications of these rules, so properties are proved by induction over them.

#### Lean 4 source Challenge.lean

```
inductive HasType : List Ty -> List (Option Ty) -> Term -> Ty -> Prop where
| varU {Gamma Delta n A} :
  Lookup Gamma n A -> Ty.Duplicable A -> AllNone Delta ->
  HasType Gamma Delta (.var .unres n) A
| varL {Gamma Delta n A} :
  Lookup Delta n (some A) -> OnlySomeAt Delta n -> HasType Gamma Delta (.var .
  lin n) A
| lamU {Gamma Delta A B M} :
  Ty.Admissible A ->
  Ty.Duplicable A ->
  AllNone Delta ->
  HasType (A :: Gamma) Delta M B ->
  HasType Gamma Delta (.lam .unres A M) (.arrow .unres A B)
| lamL {Gamma Delta A B M} :
  Ty.Admissible A ->
  HasType Gamma (some A :: Delta) M B ->
  HasType Gamma Delta (.lam .lin A M) (.arrow .lin A B)
| appL {Gamma Delta Delta_1 Delta_2 A B F X} :
  OSplit Delta Delta_1 Delta_2 ->
  HasType Gamma Delta_1 F (.arrow .lin A B) ->
  HasType Gamma Delta_2 X A ->
  HasType Gamma Delta (.app F X) B
| appU {Gamma Delta DeltaF DeltaX A B F X} :
  OSplit Delta DeltaF DeltaX ->
  AllNone DeltaX ->
  HasType Gamma DeltaF F (.arrow .unres A B) ->
  HasType Gamma DeltaX X A ->
  HasType Gamma Delta (.app F X) B
| unit {Gamma Delta} : AllNone Delta -> HasType Gamma Delta .unit .unit
| bitLit {Gamma Delta b} : AllNone Delta -> HasType Gamma Delta (.bitLit b) .bit
| pair {Gamma Delta Delta_1 Delta_2 A B M N} :
  OSplit Delta Delta_1 Delta_2 ->
  HasType Gamma Delta_1 M A ->
  HasType Gamma Delta_2 N B ->
  HasType Gamma Delta (.pair M N) (.tensor A B)
| unpair {Gamma Delta Delta_1 Delta_2 A B C M K} :
  OSplit Delta Delta_1 Delta_2 ->
  HasType Gamma Delta_1 M (.tensor A B) ->
  HasType Gamma Delta_2 K (.arrow .lin A (.arrow .lin B C)) ->
  HasType Gamma Delta (.unpair M K) C
| ite {Gamma Delta Delta_1 Delta_2 A B T E} :
  OSplit Delta Delta_1 Delta_2 ->
  HasType Gamma Delta_1 B .bit ->
  HasType Gamma Delta_2 T A ->
  HasType Gamma Delta_2 E A ->
  HasType Gamma Delta (.ite B T E) A
```

```

| prim {Gamma Delta p} : AllNone Delta -> HasType Gamma Delta (.prim p) (primTy p)
| measure {Gamma Delta Delta_1 Delta_2 A Q K} :
  OSplit Delta Delta_1 Delta_2 ->
  HasType Gamma Delta_1 Q .qubit ->
  HasType Gamma Delta_2 K (.arrow .unres .bit (.arrow .lin .qubit A)) ->
  HasType Gamma Delta (.measure Q K) A
| fix {Gamma Delta A M} :
  Ty.Admissible A ->
  Ty.Duplicable A ->
  AllNone Delta ->
  HasType Gamma Delta M (.arrow .unres A A) ->
  HasType Gamma Delta (.fix A M) A
| fold {Gamma Delta A M} :
  Ty.Admissible (.mu A) ->
  HasType Gamma Delta M (Ty.subst 0 (.mu A) A) ->
  HasType Gamma Delta (.fold A M) (.mu A)
| unfold {Gamma Delta A M} :
  Ty.Admissible (.mu A) ->
  HasType Gamma Delta M (.mu A) ->
  HasType Gamma Delta (.unfold M) (Ty.subst 0 (.mu A) A)

```

### 9.5.22 Both de Bruijn namespaces are locally scoped

**Definition.** Both de Bruijn namespaces are locally scoped.

**Construction.** Defined by cases on the input:  $\text{.var .lin } i \mapsto \text{the } i \text{ of } < \text{ and the linear depth}$ ;  $\text{.var .unres } i \mapsto \text{the } i \text{ of } < \text{ and the unrestricted depth}$ ;  $\text{.lam .lin } \_ M \mapsto \text{the well-scopedness of the sum of the linear depth and 1, the unrestricted depth, } M$ ;  $\text{.lam .unres } \_ M \mapsto \text{the well-scopedness of the linear depth, the sum of the unrestricted depth and 1, } M$ ;  $\text{.app } F X \mapsto \text{Scoped linearDepth unresDepth } F \wedge \text{Scoped linearDepth unresDepth } X$ ;  $\text{.unit} \mapsto \text{True}$ ;  $\text{.bitLit } \_ \mapsto \text{True}$ ;  $\text{.pair } M N \mapsto \text{Scoped linearDepth unresDepth } M \wedge \text{Scoped linearDepth unresDepth } N$ ; and so on for the remaining cases.

#### Lean 4 source Challenge.lean

```

def Scoped (linearDepth unresDepth : Nat) : Term -> Prop
| .var .lin i => i < linearDepth
| .var .unres i => i < unresDepth
| .lam .lin _ M => Scoped (linearDepth + 1) unresDepth M
| .lam .unres _ M => Scoped linearDepth (unresDepth + 1) M
| .app F X => Scoped linearDepth unresDepth F /\ Scoped linearDepth unresDepth X
| .unit => True
| .bitLit _ => True
| .pair M N => Scoped linearDepth unresDepth M /\ Scoped linearDepth unresDepth N
| .unpair M K => Scoped linearDepth unresDepth M /\ Scoped linearDepth unresDepth K
| .ite B T E =>
  Scoped linearDepth unresDepth B /\
  Scoped linearDepth unresDepth T /\ Scoped linearDepth unresDepth E
| .prim _ => True
| .measure Q K => Scoped linearDepth unresDepth Q /\ Scoped linearDepth unresDepth K
| .fix _ M => Scoped linearDepth unresDepth M
| .fold _ M => Scoped linearDepth unresDepth M

```



```
| .unfold M => Scoped linearDepth unresDepth M
```

### 9.5.23 Shift linear de Bruijn indices at or above cutoff by d

**Definition.** Shift linear de Bruijn indices at or above cutoff by d.

**Construction.** Defined by cases on the input: `.var .lin i`  $\mapsto$  the variable of a linear and if  $i < \text{cutoff}$  then  $i$  else  $i + d$ ; `.var .unres i`  $\mapsto$  the variable of an unrestricted and  $i$ ; `.lam .lin A M`  $\mapsto$  the lambda abstraction of a linear, A, the linear de Bruijn shift of d, cutoff + 1, M; `.lam .unres A M`  $\mapsto$  the lambda abstraction of an unrestricted, A, the linear de Bruijn shift of d, cutoff, M; `.app F X`  $\mapsto$  the application of the linear de Bruijn shift of d, cutoff, F and the linear de Bruijn shift of d, cutoff, X; `.unit`  $\mapsto$  the unit; `.bitLit b`  $\mapsto$  the bit literal of b; `.pair M N`  $\mapsto$  the pair of the linear de Bruijn shift of d, cutoff, M and the linear de Bruijn shift of d, cutoff, N; and so on for the remaining cases.

#### Lean 4 source Challenge.lean

```
def shiftLin (d cutoff : Nat) : Term -> Term
| .var .lin i => .var .lin (if i < cutoff then i else i + d)
| .var .unres i => .var .unres i
| .lam .lin A M => .lam .lin A (shiftLin d (cutoff + 1) M)
| .lam .unres A M => .lam .unres A (shiftLin d cutoff M)
| .app F X => .app (shiftLin d cutoff F) (shiftLin d cutoff X)
| .unit => .unit
| .bitLit b => .bitLit b
| .pair M N => .pair (shiftLin d cutoff M) (shiftLin d cutoff N)
| .unpair M K => .unpair (shiftLin d cutoff M) (shiftLin d cutoff K)
| .ite B T E =>
  .ite (shiftLin d cutoff B) (shiftLin d cutoff T) (shiftLin d cutoff E)
| .prim p => .prim p
| .measure Q K => .measure (shiftLin d cutoff Q) (shiftLin d cutoff K)
| .fix A M => .fix A (shiftLin d cutoff M)
| .fold A M => .fold A (shiftLin d cutoff M)
| .unfold M => .unfold (shiftLin d cutoff M)
```

### 9.5.24 Shift unrestricted de Bruijn indices at or above cutoff by d

**Definition.** Shift unrestricted de Bruijn indices at or above cutoff by d.

**Construction.** Defined by cases on the input: `.var .unres i`  $\mapsto$  the variable of an unrestricted and if  $i < \text{cutoff}$  then  $i$  else  $i + d$ ; `.var .lin i`  $\mapsto$  the variable of a linear and  $i$ ; `.lam .unres A M`  $\mapsto$  the lambda abstraction of an unrestricted, A, the unrestricted de Bruijn shift of d, cutoff + 1, M; `.lam .lin A M`  $\mapsto$  the lambda abstraction of a linear, A, the unrestricted de Bruijn shift of d, cutoff, M; `.app F X`  $\mapsto$  the application of the unrestricted de Bruijn shift of d, cutoff, F and the unrestricted de Bruijn shift of d, cutoff, X; `.unit`  $\mapsto$  the unit; `.bitLit b`  $\mapsto$  the bit literal of b; `.pair M N`  $\mapsto$  the pair of the unrestricted de Bruijn shift of d, cutoff, M and the unrestricted de Bruijn shift of d, cutoff, N; and so on for the remaining cases.

#### Lean 4 source Challenge.lean

```
def shiftUnres (d cutoff : Nat) : Term -> Term
```

```

| .var .unres i => .var .unres (if i < cutoff then i else i + d)
| .var .lin i => .var .lin i
| .lam .unres A M => .lam .unres A (shiftUnres d (cutoff + 1) M)
| .lam .lin A M => .lam .lin A (shiftUnres d cutoff M)
| .app F X => .app (shiftUnres d cutoff F) (shiftUnres d cutoff X)
| .unit => .unit
| .bitLit b => .bitLit b
| .pair M N => .pair (shiftUnres d cutoff M) (shiftUnres d cutoff N)
| .unpair M K => .unpair (shiftUnres d cutoff M) (shiftUnres d cutoff K)
| .ite B T E =>
  .ite (shiftUnres d cutoff B) (shiftUnres d cutoff T) (shiftUnres d cutoff E)
| .prim p => .prim p
| .measure Q K => .measure (shiftUnres d cutoff Q) (shiftUnres d cutoff K)
| .fix A M => .fix A (shiftUnres d cutoff M)
| .fold A M => .fold A (shiftUnres d cutoff M)
| .unfold M => .unfold (shiftUnres d cutoff M)

```

### 9.5.25 Replace linear de Bruijn index k

**Definition.** Replace linear de Bruijn index k. Indices above k decrease.

**Construction.** Defined by cases on the input:  $\text{.var .lin } i \mapsto \text{if } i < k \text{ then .var .lin } i$ ;  $\text{.var .unres } i \mapsto \text{the variable of an unrestricted and } i$ ;  $\text{.lam .lin } A \ M \mapsto \text{the lambda abstraction of a linear, } A, \text{ the linear substitution of } k + 1, v, M$ ;  $\text{.lam .unres } A \ M \mapsto \text{the lambda abstraction of an unrestricted, } A, \text{ the linear substitution of } k, \text{shiftUnres } 1 \ 0 \ v, M$ ;  $\text{.app } F \ X \mapsto \text{the application of the linear substitution of } k, v, F \text{ and the linear substitution of } k, v, X$ ;  $\text{.unit} \mapsto \text{the unit}$ ;  $\text{.bitLit } b \mapsto \text{the bit literal of } b$ ;  $\text{.pair } M \ N \mapsto \text{the pair of the linear substitution of } k, v, M \text{ and the linear substitution of } k, v, N$ ; and so on for the remaining cases.

#### Lean 4 source Challenge.lean

```

def substLin (k : Nat) (v : Term) : Term -> Term
| .var .lin i =>
  if i < k then .var .lin i
  else if i = k then shiftLin k 0 v
  else .var .lin (i - 1)
| .var .unres i => .var .unres i
| .lam .lin A M => .lam .lin A (substLin (k + 1) v M)
| .lam .unres A M =>
  .lam .unres A (substLin k (shiftUnres 1 0 v) M)
| .app F X => .app (substLin k v F) (substLin k v X)
| .unit => .unit
| .bitLit b => .bitLit b
| .pair M N => .pair (substLin k v M) (substLin k v N)
| .unpair M K => .unpair (substLin k v M) (substLin k v K)
| .ite B T E => .ite (substLin k v B) (substLin k v T) (substLin k v E)
| .prim p => .prim p
| .measure Q K => .measure (substLin k v Q) (substLin k v K)
| .fix A M => .fix A (substLin k v M)
| .fold A M => .fold A (substLin k v M)
| .unfold M => .unfold (substLin k v M)

```

### 9.5.26 Replace unrestricted de Bruijn index k

**Definition.** Replace unrestricted de Bruijn index k.

**Construction.** Defined by cases on the input:  $\text{.var .unres } i \mapsto \text{if } i < k \text{ then .var .unres } i$ ;  $\text{.var .lin } i \mapsto \text{the variable of a linear and } i$ ;  $\text{.lam .unres } A \ M \mapsto \text{the lambda abstraction of an unrestricted, } A, \text{ the unrestricted substitution of } k + 1, v, M$ ;  $\text{.lam .lin } A \ M \mapsto \text{the lambda abstraction of a linear, } A, \text{ the unrestricted substitution of } k, \text{shiftLin } 1 \ 0 \ v, M$ ;  $\text{.app } F \ X \mapsto \text{the application of the unrestricted substitution of } k, v, F \text{ and the unrestricted substitution of } k, v, X$ ;  $\text{.unit} \mapsto \text{the unit}$ ;  $\text{.bitLit } b \mapsto \text{the bit literal of } b$ ;  $\text{.pair } M \ N \mapsto \text{the pair of the unrestricted substitution of } k, v, M \text{ and the unrestricted substitution of } k, v, N$ ; and so on for the remaining cases.

#### Lean 4 source Challenge.lean

```
def substUnres (k : Nat) (v : Term) : Term -> Term
| .var .unres i =>
  if i < k then .var .unres i
  else if i = k then shiftUnres k 0 v
  else .var .unres (i - 1)
| .var .lin i => .var .lin i
| .lam .unres A M => .lam .unres A (substUnres (k + 1) v M)
| .lam .lin A M =>
  .lam .lin A (substUnres k (shiftLin 1 0 v) M)
| .app F X => .app (substUnres k v F) (substUnres k v X)
| .unit => .unit
| .bitLit b => .bitLit b
| .pair M N => .pair (substUnres k v M) (substUnres k v N)
| .unpair M K => .unpair (substUnres k v M) (substUnres k v K)
| .ite B T E => .ite (substUnres k v B) (substUnres k v T) (substUnres k v E)
| .prim p => .prim p
| .measure Q K => .measure (substUnres k v Q) (substUnres k v K)
| .fix A M => .fix A (substUnres k v M)
| .fold A M => .fold A (substUnres k v M)
| .unfold M => .unfold (substUnres k v M)
```

### 9.5.27 Classical call-by-value reduction

**Definition.** Classical call-by-value reduction. Quantum primitive applications are not reduced by this relation; they are staged as circuit operations.

**Construction.** Generated by the rules betaL, betaU, appF, appX, iteTrue, iteFalse, iteC, unpairBeta, unpairC, pairL, pairR and unfoldBeta. Every element arises from finitely many applications of these rules, so properties are proved by induction over them.

#### Lean 4 source Challenge.lean

```
inductive Step : Term -> Term -> Prop where
| betaL {A M V} : Value V -> Step (.app (.lam .lin A M) V) (substLin 0 V M)
| betaU {A M V} : Value V -> Step (.app (.lam .unres A M) V) (substUnres 0 V M)
| appF {F F' X} : Step F F' -> Step (.app F X) (.app F' X)
| appX {V X X'} : Value V -> Step X X' -> Step (.app V X) (.app V X')
| iteTrue {T E} : Step (.ite (.bitLit true) T E) T
| iteFalse {T E} : Step (.ite (.bitLit false) T E) E
| iteC {B B' T E} : Step B B' -> Step (.ite B T E) (.ite B' T E)
```

```

| unpairBeta {M N K} :
  Value M -> Value N ->
  Step (.unpair (.pair M N) K) (.app (.app K M) N)
| unpairC {M M' K} : Step M M' -> Step (.unpair M K) (.unpair M' K)
| pairL {M M' N} : Step M M' -> Step (.pair M N) (.pair M' N)
| pairR {V N N'} : Value V -> Step N N' -> Step (.pair V N) (.pair V N')
| unfoldBeta {A V} : Value V -> Step (.unfold (.fold A V)) V
| unfoldC {M M'} : Step M M' -> Step (.unfold M) (.unfold M')
| fixBeta {A V} : Value V -> Step (.fix A V) (.app V (.fix A V))
| fixC {A M M'} : Step M M' -> Step (.fix A M) (.fix A M')
| foldC {A M M'} : Step M M' -> Step (.fold A M) (.fold A M')
| measureC {Q Q' K} : Step Q Q' -> Step (.measure Q K) (.measure Q' K)

```

### 9.5.28 Measurement branches

**Definition.** Measurement branches.  $Q$  is returned with the bit, so the qubit is not discarded.

**Construction.** Generated by the rules `branch`. Every element arises from finitely many applications of these rules, so properties are proved by induction over them.

#### Lean 4 source Challenge.lean

```

inductive MeasStep : Term -> Bool -> Term -> Prop where
| branch {Q K b} :
  Value Q ->
  MeasStep (.measure Q K) b (.app (.app K (.bitLit b)) Q)

```

### 9.5.29 A source evaluation context has reached a quantum primitive

**Definition.** A source evaluation context has reached a quantum primitive. The staging or machine layer, rather than classical  $\beta$ -reduction, handles this case.

**Construction.** Generated by the rules `primApp`, `measure`, `appF`, `appX`, `iteC`, `unpairC`, `pairL`, `pairR`, `unfoldC`, `fixC`, `foldC` and `measureC`. Every element arises from finitely many applications of these rules, so properties are proved by induction over them.

#### Lean 4 source Challenge.lean

```

inductive QuantumBlocked : Term -> Prop where
| primApp {p V} : Value V -> QuantumBlocked (.app (.prim p) V)
| measure {Q K} : Value Q -> QuantumBlocked (.measure Q K)
| appF {F X} : QuantumBlocked F -> QuantumBlocked (.app F X)
| appX {V X} : Value V -> QuantumBlocked X -> QuantumBlocked (.app V X)
| iteC {B T E} : QuantumBlocked B -> QuantumBlocked (.ite B T E)
| unpairC {M K} : QuantumBlocked M -> QuantumBlocked (.unpair M K)
| pairL {M N} : QuantumBlocked M -> QuantumBlocked (.pair M N)
| pairR {V N} : Value V -> QuantumBlocked N -> QuantumBlocked (.pair V N)
| unfoldC {M} : QuantumBlocked M -> QuantumBlocked (.unfold M)
| fixC {A M} : QuantumBlocked M -> QuantumBlocked (.fix A M)
| foldC {A M} : QuantumBlocked M -> QuantumBlocked (.fold A M)
| measureC {Q K} : QuantumBlocked Q -> QuantumBlocked (.measure Q K)

```

### 9.5.30 A term is a value, takes a classical step, or is quantum-blocked

**Definition.** A term is a value, takes a classical step, or is quantum-blocked.

**Construction.** Defined to be  $\text{Value } M \vee (\exists N, \text{Step } M N) \vee \text{QuantumBlocked } M$ .

**Lean 4 source** [Challenge.lean](#)

```
def MakesProgress (M : Term) : Prop :=
  Value M \/\ (exists N, Step M N) \/\ QuantumBlocked M
```

### 9.5.31 Classical Boolean expressions over the fixed classical register

**Definition.** Classical Boolean expressions over the fixed classical register.

**Construction.** Generated by the rules `lit`, `bit`, `not`, `and`, `or` and `xor`. Every element arises from finitely many applications of these rules, so properties are proved by induction over them.

**Lean 4 source** [Challenge.lean](#)

```
inductive CExpr (c : Nat) where
| lit : Bool -> CExpr c
| bit : Fin c -> CExpr c
| not : CExpr c -> CExpr c
| and : CExpr c -> CExpr c -> CExpr c
| or : CExpr c -> CExpr c -> CExpr c
| xor : CExpr c -> CExpr c -> CExpr c
```

### 9.5.32 Exactly serializable probability used by the physical compiler

**Definition.** Exactly serializable probability used by the physical compiler.

**Construction.** An element consists of `val`, subject to the laws `nonneg` and `le_one`.

**Lean 4 source** [Challenge.lean](#)

```
structure Probability where
  val : ?
  nonneg : 0 <= val
  le_one : val <= 1
```

### 9.5.33 Typed angle expressions admitted by the normalized circuit target

**Definition.** Typed angle expressions admitted by the normalized circuit target.

**Construction.** Generated by the rules `rational` and `coin`. Every element arises from finitely many applications of these rules, so properties are proved by induction over them.

**Lean 4 source** [Challenge.lean](#)

```
inductive AngleExpr where
| rational : ? -> AngleExpr
/-- `2 * acos (sqrt p)`, so RY followed by Z measurement returns zero
with probability `p`. -/
| coin : Probability -> AngleExpr
```

### 9.5.34 First-order circuit normal form on $q$ qubits and $c$ classical bits

**Definition.** First-order circuit normal form on  $q$  qubits and  $c$  classical bits.

**Construction.** Generated by the rules `skip`, `x`, `h`, `t`, `ry`, `cx`, `measure`, `reset`, `store`, `seq` and `branch`. Every element arises from finitely many applications of these rules, so properties are proved by induction over them.

**Lean 4 source** [Challenge.lean](#)

```
inductive Command (q c : Nat) where
| skip
| x : Fin q -> Command q c
| h : Fin q -> Command q c
| t : Fin q -> Command q c
| ry : Composer.AngleExpr -> Fin q -> Command q c
| cx : Fin q -> Fin q -> Command q c
| measure : Fin q -> Fin c -> Command q c
| reset : Fin q -> Command q c
| store : Fin c -> Composer.CExpr c -> Command q c
| seq : Command q c -> Command q c -> Command q c
| branch : Composer.CExpr c -> Command q c -> Command q c -> Command q c
```

### 9.5.35 The declared finite register sizes of this quotation

**Definition.** The declared finite register sizes of this quotation.

**Construction.** Defined to be 2.

**Lean 4 source** [Challenge.lean](#)

```
abbrev quantumSize : Nat := 2
```

### 9.5.36 Definition of the classical size of circuit commands

**Definition.** The classical size is a natural number.

**Construction.** Defined to be 1.

**Lean 4 source** [Challenge.lean](#)

```
abbrev classicalSize : Nat := 1
```

### 9.5.37 The two-qubit register type

**Definition.** The two-qubit register type.

**Construction.** Defined to be the tensor product of a qubit and a qubit.

**Lean 4 source** [Challenge.lean](#)

```
def qubitRegisterTy : Ty :=
  .tensor .qubit .qubit
```

### 9.5.38 The register together with the classical bit

**Definition.** The register together with the classical bit.

**Construction.** Defined to be the tensor product of the qubit-register type and a bit.

**Lean 4 source** [Challenge.lean](#)

```
def resultTy : Ty :=
  .tensor qubitRegisterTy .bit
```

### 9.5.39 Curried source type for the fixed $2 \times 1$ register: $\text{Bit} \rightarrow^\omega \text{Qubit} \rightarrow^1 \text{Qubit} \rightarrow^1 ((\text{Qubit} \otimes \text{Qubit}) \otimes \text{Bit})$

**Definition.** Curried source type for the fixed  $2 \times 1$  register:  $\text{Bit} \rightarrow^\omega \text{Qubit} \rightarrow^1 \text{Qubit} \rightarrow^1 ((\text{Qubit} \otimes \text{Qubit}) \otimes \text{Bit})$ .

**Construction.** Defined by an explicit formula built from the result type.

**Lean 4 source** [Challenge.lean](#)

```
def quotationTy : Ty :=
  .arrow .unres .bit <|
    .arrow .lin .qubit <|
      .arrow .lin .qubit resultTy
```

### 9.5.40 Exactly the target angles represented by source Y-rotation gate

**Definition.** Exactly the target angles represented by source `Prim.ry`.

**Construction.** Generated by the rules `rational`. Every element arises from finitely many applications of these rules, so properties are proved by induction over them.

**Lean 4 source** [Challenge.lean](#)

```
inductive AngleQuotable : Composer.AngleExpr -> Prop where
  | rational (r : ?) : AngleQuotable (.rational r)
```

### 9.5.41 Exact circuit command of 2 and 1 fragment represented by the quotation

**Definition.** Exact Command  $2 \times 1$  fragment represented by the quotation.

**Construction.** Generated by the rules `skip`, `x`, `h`, `t`, `ry`, `cx`, `measure`, `reset`, `store`, `seq` and `branch`. Every element arises from finitely many applications of these rules, so properties are proved by induction over them.

**Lean 4 source** [Challenge.lean](#)

```
inductive Quotable : Command quantumSize classicalSize -> Prop where
  | skip : Quotable .skip
  | x {w} : Quotable (.x w)
  | h {w} : Quotable (.h w)
  | t {w} : Quotable (.t w)
  | ry {? w} : AngleQuotable ? -> Quotable (.ry ? w)
```

```

| cx {control target} :
  control != target -> Quotable (.cx control target)
| measure {qbit cbit} : Quotable (.measure qbit cbit)
| reset {qbit} : Quotable (.reset qbit)
| store {cbit e} : Quotable (.store cbit e)
| seq {A B} : Quotable A -> Quotable B -> Quotable (.seq A B)
| branch {guard yes no} :
  Quotable yes -> Quotable no -> Quotable (.branch guard yes no)

```

### 9.5.42 Interpret the sole classical register cell as a pure source bit term

**Definition.** Interpret the sole classical register cell as a pure source bit term.

**Construction.** Defined by cases on the input:  $\text{.lit } b \mapsto$  the bit literal of  $b$ ;  $\text{.bit } \_ \mapsto$  current;  $\text{.not } e \mapsto$  the conditional of the quotation of a classical expression of current and  $e$ , the bit literal of false, the bit literal of true;  $\text{.and } e_1 \ e_2 \mapsto$  the conditional of the quotation of a classical expression of current and  $e_1$ , the quotation of a classical expression of current and  $e_2$ , the bit literal of false;  $\text{.or } e_1 \ e_2 \mapsto$  the conditional of the quotation of a classical expression of current and  $e_1$ , the bit literal of true, the quotation of a classical expression of current and  $e_2$ ;  $\text{.xor } e_1 \ e_2 \mapsto$  the conditional of the quotation of a classical expression of current and  $e_1$ .

#### Lean 4 source Challenge.lean

```

def quoteCEExpr (current : Term) : Composer.CEExpr classicalSize -> Term
| .lit b => .bitLit b
| .bit _ => current
| .not e => .ite (quoteCEExpr current e) (.bitLit false) (.bitLit true)
| .and e_1 e_2 =>
  .ite (quoteCEExpr current e_1) (quoteCEExpr current e_2) (.bitLit false)
| .or e_1 e_2 =>
  .ite (quoteCEExpr current e_1) (.bitLit true) (quoteCEExpr current e_2)
| .xor e_1 e_2 =>
  .ite (quoteCEExpr current e_1)
    (.ite (quoteCEExpr current e_2) (.bitLit false) (.bitLit true))
    (quoteCEExpr current e_2)

```

### 9.5.43 Apply a unary source primitive to one component of a two-qubit tensor

**Definition.** Apply a unary source primitive to one component of a two-qubit tensor.

**Construction.** Defined by an explicit formula built from the qubit-register type.

#### Lean 4 source Challenge.lean

```

def unaryRegister (p : Prim) (w : Fin quantumSize) : Term :=
  .lam .lin qubitRegisterTy <|
    .unpair (.var .lin 0) <|
      .lam .lin .qubit <|
        .lam .lin .qubit <|
          if w = 0 then
            .pair (.app (.prim p) (.var .lin 1)) (.var .lin 0)
          else
            .pair (.var .lin 1) (.app (.prim p) (.var .lin 0))

```



#### 9.5.44 Apply `cx`, restoring canonical register order in the reverse orientation

**Definition.** Apply `cx`, restoring canonical register order in the reverse orientation.

**Construction.** Defined by an explicit formula built from the qubit-register type.

##### Lean 4 source `Challenge.lean`

```
def cxRegister (control target : Fin quantumSize) : Term :=
  .lam .lin qubitRegisterTy <|
    .unpair (.var .lin 0) <|
      .lam .lin .qubit <|
        .lam .lin .qubit <|
          if control = target then
            .pair (.var .lin 1) (.var .lin 0)
          else if control = 0 then
            .app (.app (.prim .cx) (.var .lin 1)) (.var .lin 0)
          else
            .unpair
              (.app (.app (.prim .cx) (.var .lin 0)) (.var .lin 1))
              (.lam .lin .qubit <|
                .lam .lin .qubit <|
                  .pair (.var .lin 0) (.var .lin 1))
```

#### 9.5.45 Bind the transformed register as the new linear register variable

**Definition.** Bind the transformed register as the new linear register variable.

**Construction.** Defined to be the application of the lambda abstraction of a linear, `qubitRegisterTy`, `body` and `next`.

##### Lean 4 source `Challenge.lean`

```
def bindRegister (next body : Term) : Term :=
  .app (.lam .lin qubitRegisterTy body) next
```

#### 9.5.46 Continue with the current classical value and a rebuilt register

**Definition.** Continue with the current classical value and a rebuilt register.

**Construction.** Defined to be the sequential composition register of `register` and the `k` of `current`.

##### Lean 4 source `Challenge.lean`

```
def continueWith (k : Term -> Term) (current register : Term) : Term :=
  bindRegister register (k current)
```

#### 9.5.47 Measurement of either wire

**Definition.** Measurement of either wire. The measurement continuation is linearly closed and returns a function waiting for the untouched wire.

**Construction.** Defined by an explicit formula built from the `continue with`.

##### Lean 4 source `Challenge.lean`

```

def measureRegister (qbit : Fin quantumSize)
  (k : Term -> Term) : Term :=
  .unpair (.var .lin 0) <|
  .lam .lin .qubit <|
  .lam .lin .qubit <|
  if qbit = 0 then
    .app
      (.measure (.var .lin 1) <|
        .lam .unres .bit <|
        .lam .lin .qubit <|
        .lam .lin .qubit <|
        continueWith k (.var .unres 0)
        (.pair (.var .lin 1) (.var .lin 0)))
      (.var .lin 0)
  else
    .app
      (.measure (.var .lin 0) <|
        .lam .unres .bit <|
        .lam .lin .qubit <|
        .lam .lin .qubit <|
        continueWith k (.var .unres 0)
        (.pair (.var .lin 0) (.var .lin 1)))
      (.var .lin 1)

```

### 9.5.48 Continuation-passing quotation of a command body

**Definition.** Continuation-passing quotation of a command body.

**Construction.** Defined by cases on the input:  $\text{.skip} \mapsto$  the  $k$  of current;  $\text{.x } w \mapsto$  the sequential composition register;  $\text{.h } w \mapsto$  the sequential composition register;  $\text{.t } w \mapsto$  the sequential composition register;  $\text{.ry } \theta \mapsto$  let  $r := \text{match } \theta \text{ with}$ ;  $\text{.rational } r \mapsto r$ ;  $\text{.coin } p \mapsto$  the val of  $p$ ;  $\text{.cx control target} \mapsto$  the sequential composition register; and so on for the remaining cases.

#### Lean 4 source `Challenge.lean`

```

def quoteBody
  (C : Command quantumSize classicalSize)
  (current : Term) (k : Term -> Term) : Term :=
  match C with
  | .skip => k current
  | .x w =>
    bindRegister
      (.app (unaryRegister .x w) (.var .lin 0)) (k current)
  | .h w =>
    bindRegister
      (.app (unaryRegister .h w) (.var .lin 0)) (k current)
  | .t w =>
    bindRegister
      (.app (unaryRegister .t w) (.var .lin 0)) (k current)
  | .ry ? w =>
    let r := match ? with
    | .rational r => r
    | .coin p => p.val
    bindRegister
      (.app (unaryRegister (.ry r) w) (.var .lin 0)) (k current)

```

```

| .cx control target =>
  bindRegister
  (.app (cxRegister control target) (.var .lin 0)) (k current)
| .measure qbit _ => measureRegister qbit k
| .reset qbit =>
  bindRegister
  (.app (unaryRegister .reset qbit) (.var .lin 0)) (k current)
| .store _ e => k (quoteCExpr current e)
| .seq A B =>
  quoteBody A current (fun next => quoteBody B next k)
| .branch guard yes no =>
  .ite (quoteCExpr current guard)
    (quoteBody yes current k) (quoteBody no current k)

```

### 9.5.49 Canonical lambda quotation with one unrestricted classical binder and two curried linear qubit binders

**Definition.** Canonical lambda quotation with one unrestricted classical binder and two curried linear qubit binders.

**Construction.** Defined by an explicit formula built from the sequential composition register and the quoted body.

#### Lean 4 source [Challenge.lean](#)

```

def quote (C : Command quantumSize classicalSize) : Term :=
  .lam .unres .bit <|
    .lam .lin .qubit <|
      .lam .lin .qubit <|
        bindRegister
        (.pair (.var .lin 1) (.var .lin 0))
        (quoteBody C (.var .unres 0)
          (fun current => .pair (.var .lin 0) current))

```

### 9.5.50 A certified canonical source quotation of a circuit command of 2 and 1

**Definition.** A certified canonical source quotation of a Command 2 1.

**Construction.** An element consists of command, subject to the laws quotable.

#### Lean 4 source [Challenge.lean](#)

```

structure Quotation where
  command : Command quantumSize classicalSize
  quotable : Quotable command

```

### 9.5.51 Definition of the term of quotations

**Definition.** The term of  $\mathcal{Q}$  is a term.

**Construction.** Defined to be the quotation of the circuit command of  $\mathcal{Q}$ .

#### Lean 4 source [Challenge.lean](#)

```
def term (Q : Quotation) : Term :=
  quote Q.command
```

### 9.5.52 Exact extraction of the represented finite-register command

**Definition.** Exact extraction of the represented finite-register command.

**Construction.** Defined to be the circuit command of  $Q$ .

**Lean 4 source** [Challenge.lean](#)

```
def compile (Q : Quotation) : Command quantumSize classicalSize :=
  Q.command
```

### 9.5.53 Exact command-to-canonical-source reflection

**Definition.** Exact command-to-canonical-source reflection.

**Construction.** Constructed by supplying each component of the structure explicitly.

**Lean 4 source** [Challenge.lean](#)

```
def reflect (C : Command quantumSize classicalSize)
  (hC : Quotable C) : Quotation :=
  <C, hC>
```

### 9.5.54 Type safety of the typed linear quantum $\lambda$ -calculus for closed programs

**Statement.** Type safety of the typed linear quantum  $\lambda$ -calculus for closed programs. A closed well-typed term is a value, takes a classical call-by-value step, or has reached a quantum primitive; classical reduction is deterministic; and both classical and measurement transitions preserve the type.

**Proof.** The claim follows directly from the definitions of the objects involved.

**Lean 4 source** [Challenge.lean](#)

```
theorem source_type_safety {M : Term} {A : Ty} (h : HasType [] [] M A) :
  MakesProgress M /\
    (forall N, Step M N -> HasType [] [] N A) /\
    (forall b N, MeasStep M b N -> HasType [] [] N A) /\
    (forall N_1 N_2, Step M N_1 -> Step M N_2 -> N_1 = N_2) := by
  sorry
```

### 9.5.55 Two-wire quotation capstone (typing + exact compile)

**Statement.** Two-wire quotation capstone (typing + exact compile): every `Quotable` command has a well-typed canonical lambda representative whose compilation is the original command. Ideal CQ agreement is proved in-tree as `Command.GeneralQuotation.Quotation.quotation_capstone` and staged for a later comparator expansion that can expose `Composer.Model` without a structure hole. Formally:  $\text{HasType [] [] (Quotation.reflect C hC).term quotationTy} \wedge \text{(Quotation.reflect C hC).compile} = C$ .

**Proof.** The claim follows directly from the definitions of the objects involved.

#### Lean 4 source Challenge.lean

```
theorem quotation_capstone
  (C : Command quantumSize classicalSize) (hC : Quotable C) :
  HasType [] [] (Quotation.reflect C hC).term quotationTy /\
  (Quotation.reflect C hC).compile = C := by
  sorry

/-! ## Section 3: finite runtime -/
```

### 9.5.56 Section 3: finite runtime

**Definition.** ## Section 3: finite runtime.

**Construction.** Defined to be sorry.

#### Lean 4 source Challenge.lean

```
noncomputable def RuntimeRegister (q : Nat) : Type := sorry
```

### 9.5.57 Definition of the runtime measurement probability

**Definition.** The runtime measurement probability of  $\rho$ ,  $w$  and  $b$  is a real number.

**Construction.** Defined to be sorry.

#### Lean 4 source Challenge.lean

```
noncomputable def runtimeMeasureProbability {q : Nat}
  (? : RuntimeRegister q) (w : Fin q) (b : Bool) : Real := sorry
```

### 9.5.58 Definition of the runtime config

**Definition.** The runtime config of  $q$  is an element of Type.

**Construction.** Defined to be sorry.

#### Lean 4 source Challenge.lean

```
noncomputable def RuntimeConfig (q : Nat) : Type := sorry
```

### 9.5.59 Definition of the runtime well-typedness

**Definition.** The runtime well-typedness of  $s$  and  $A$  is a proposition-valued predicate, defined below.

**Construction.** Defined to be sorry.

#### Lean 4 source Challenge.lean

```
def runtimeWellTyped {q : Nat} (s : RuntimeConfig q) (A : Ty) : Prop := sorry
```

### 9.5.60 Definition of the runtime internal one-step reduction

**Definition.** The runtime internal one-step reduction of  $s$  and  $s'$  is a proposition-valued predicate, defined below.

**Construction.** Defined to be `sorry`.

**Lean 4 source Challenge .lean**

```
def runtimeInternalStep {q : Nat} (s s' : RuntimeConfig q) : Prop := sorry
```

### 9.5.61 Definition of the runtime measurement one-step reduction

**Definition.** The runtime measurement one-step reduction is a proposition-valued predicate, defined below.

**Construction.** Defined to be `sorry`.

**Lean 4 source Challenge .lean**

```
def runtimeMeasurementStep {q : Nat} (s : RuntimeConfig q) (weight : Real)
  (outcome : Bool) (s' : RuntimeConfig q) : Prop := sorry
```

### 9.5.62 Definition of the runtime normal

**Definition.** The runtime normal of  $s$  is a proposition-valued predicate, defined below.

**Construction.** Defined to be `sorry`.

**Lean 4 source Challenge .lean**

```
def runtimeNormal {q : Nat} (s : RuntimeConfig q) : Prop := sorry
```

### 9.5.63 Definition of the runtime out of wires

**Definition.** The runtime out of wires of  $s$  is a proposition-valued predicate, defined below.

**Construction.** Defined to be `sorry`.

**Lean 4 source Challenge .lean**

```
def runtimeOutOfWires {q : Nat} (s : RuntimeConfig q) : Prop := sorry
```

### 9.5.64 Measurement probability false addition true

**Statement.** `RegisterState.measureProbability_false_add_true`. Formally:  $\text{runtimeMeasureProbability } \rho \text{ } w \text{ false} + \text{runtimeMeasureProbability } \rho \text{ } w \text{ true} = 1$ .

**Proof.** The claim follows directly from the definitions of the objects involved.

**Lean 4 source Challenge .lean**

```
theorem runtime_born_normalizes {q : Nat} (? : RuntimeRegister q) (w : Fin q) :
  runtimeMeasureProbability ? w false + runtimeMeasureProbability ? w true = 1 := by
  sorry
```

### 9.5.65 Internal type preservation

**Statement.** `Runtime.internal_preservation`. Formally: `runtimeWellTyped s' A`.

**Proof.** The claim follows directly from the definitions of the objects involved.

#### Lean 4 source Challenge.lean

```
theorem runtime_internal_preservation {q : Nat} {s s' : RuntimeConfig q} {A : Ty}
  (ht : runtimeWellTyped s A) (hs : runtimeInternalStep s s') :
  runtimeWellTyped s' A := by
  sorry
```

### 9.5.66 Measurement type preservation

**Statement.** `Runtime.measurement_preservation`. Formally: `runtimeWellTyped s' A`.

**Proof.** The claim follows directly from the definitions of the objects involved.

#### Lean 4 source Challenge.lean

```
theorem runtime_measurement_preservation {q : Nat} {s s' : RuntimeConfig q}
  {weight : Real} {outcome : Bool} {A : Ty}
  (ht : runtimeWellTyped s A)
  (hs : runtimeMeasurementStep s weight outcome s') :
  runtimeWellTyped s' A := by
  sorry
```

### 9.5.67 Progress

**Statement.** `Runtime.progress`.

**Proof.** The claim follows directly from the definitions of the objects involved.

#### Lean 4 source Challenge.lean

```
theorem runtime_progress {q : Nat} {s : RuntimeConfig q} {A : Ty}
  (ht : runtimeWellTyped s A) :
  runtimeNormal s \/\ runtimeOutOfWires s \/\
  (exists s', runtimeInternalStep s s') \/\
  (exists weight outcome s', runtimeMeasurementStep s weight outcome s') := by
  sorry
```

```
/-! ## Section 4: quantum relations, qCPOs, `Set dashv qRel` -/
```

### 9.5.68 Definition of the quantum set

**Definition.** `## Section 4: quantum relations, qCPOs, Set  $\dashv$  qRel`.

**Construction.** Defined to be `sorry`.

#### Lean 4 source Challenge.lean

```
noncomputable def QuantumSet : Type 1 := sorry
```

### 9.5.69 Definition of the quantum relation

**Definition.** The quantum relation of  $X$  and  $Y$  is an element of `Type`.

**Construction.** Defined to be `sorry`.

**Lean 4 source** [Challenge.lean](#)

```
noncomputable def QuantumRel (X Y : QuantumSet) : Type := sorry
```

### 9.5.70 Definition of the rel composite

**Definition.** The rel composite of  $S$  and  $R$  is a quantum relation from  $X$  to  $Z$ .

**Construction.** Defined to be `sorry`.

**Lean 4 source** [Challenge.lean](#)

```
noncomputable def relComp {X Y Z : QuantumSet}
  (S : QuantumRel Y Z) (R : QuantumRel X Y) : QuantumRel X Z := sorry
```

### 9.5.71 Definition of the rel adjoint

**Definition.** The rel adjoint of  $R$  is a quantum relation from  $Y$  to  $X$ .

**Construction.** Defined to be `sorry`.

**Lean 4 source** [Challenge.lean](#)

```
noncomputable def relDagger {X Y : QuantumSet}
  (R : QuantumRel X Y) : QuantumRel Y X := sorry
```

### 9.5.72 Definition of the rel i supremum

**Definition.** The rel i supremum of  $S$  is a quantum relation from  $X$  to  $Y$ .

**Construction.** Defined to be `sorry`.

**Lean 4 source** [Challenge.lean](#)

```
noncomputable def relISup {X Y : QuantumSet}
  (S : Nat -> QuantumRel X Y) : QuantumRel X Y := sorry
```

### 9.5.73 Definition of the quantum dec equality

**Definition.** The quantum dec equality of  $X$  is an element of `Type`.

**Construction.** Defined to be `sorry`.

**Lean 4 source** [Challenge.lean](#)

```
def quantumDecEq (X : QuantumSet) : Type := sorry
```



#### 9.5.74 Definition of the rel identity

**Definition.** The rel identity of  $X$  is a quantum relation from  $X$  to  $X$ .

**Construction.** Defined to be `sorry`.

**Lean 4 source** [Challenge.lean](#)

```
noncomputable def relId (X : QuantumSet) (_h : quantumDecEq X) : QuantumRel X X :=
  sorry
```

#### 9.5.75 Definition of the quantum poset

**Definition.** The quantum poset is an element of `Type 1`.

**Construction.** Defined to be `sorry`.

**Lean 4 source** [Challenge.lean](#)

```
noncomputable def QuantumPoset : Type 1 := sorry
```

#### 9.5.76 Definition of the qubit poset

**Definition.** The qubit poset is a quantum poset.

**Construction.** Defined to be `sorry`.

**Lean 4 source** [Challenge.lean](#)

```
noncomputable def qubitPoset : QuantumPoset := sorry
```

#### 9.5.77 Definition of the quantum CPO property

**Definition.** The quantum CPO property of  $P$  is a proposition-valued predicate, defined below.

**Construction.** Defined to be `sorry`.

**Lean 4 source** [Challenge.lean](#)

```
def isQuantumCPO (P : QuantumPoset) : Prop := sorry
```

#### 9.5.78 Definition of the model linear objects

**Definition.** The model linear objects is an element of `Type 1`.

**Construction.** Defined to be `sorry`.

**Lean 4 source** [Challenge.lean](#)

```
noncomputable def modelLinearObjects : Type 1 := sorry
```

### 9.5.79 Definition of the quantum rel objects

**Definition.** The quantum rel objects is an element of `Type 1`.

**Construction.** Defined to be `sorry`.

**Lean 4 source** [Challenge.lean](#)

```
noncomputable def qRelObjects : Type 1 := sorry
```

### 9.5.80 Definition of the quantum CPO category objects

**Definition.** The quantum CPO category objects is an element of `Type 1`.

**Construction.** Defined to be `sorry`.

**Lean 4 source** [Challenge.lean](#)

```
noncomputable def qCPOCategoryObjects : Type 1 := sorry
```

### 9.5.81 Definition of the quantum CPO carrier

**Definition.** The quantum CPO carrier is an element of `Type 1`.

**Construction.** Defined to be `sorry`.

**Lean 4 source** [Challenge.lean](#)

```
noncomputable def quantumCPOCarrier : Type 1 := sorry
```

### 9.5.82 $(T \circ S) \circ R = T \circ (S \circ R)$

**Statement.**  $(T \circ S) \circ R = T \circ (S \circ R)$ . Formally: `relComp (relComp T S) R = relComp T (relComp S R)`.

**Proof.** The claim follows directly from the definitions of the objects involved.

**Lean 4 source** [Challenge.lean](#)

```
theorem quantumRel_assoc {X Y Z W : QuantumSet}
  (T : QuantumRel Z W) (S : QuantumRel Y Z) (R : QuantumRel X Y) :
  relComp (relComp T S) R = relComp T (relComp S R) := by
  sorry
```

### 9.5.83 $(S \circ R)^\dagger = R^\dagger \circ S^\dagger$

**Statement.**  $(S \circ R)^\dagger = R^\dagger \circ S^\dagger$ . Formally: `relDagger (relComp S R) = relComp (relDagger R) (relDagger S)`.

**Proof.** The claim follows directly from the definitions of the objects involved.

**Lean 4 source** [Challenge.lean](#)

```

theorem quantumRel_dagger_comp {X Y Z : QuantumSet}
  (S : QuantumRel Y Z) (R : QuantumRel X Y) :
  relDagger (relComp S R) = relComp (relDagger R) (relDagger S) := by
  sorry

```

### 9.5.84 $(\bigcup S) \circ R = \bigcup (S \circ R)$

**Statement.**  $(\bigcup S) \circ R = \bigcup (S \circ R)$ . Formally:  $\text{relComp } (\text{relISup } S) R = \text{relISup } (\text{fun } n \Rightarrow \text{relComp } (S n) R)$ .

**Proof.** The claim follows directly from the definitions of the objects involved.

#### Lean 4 source Challenge.lean

```

theorem quantumRel_comp_iSup_left {X Y Z : QuantumSet}
  (S : Nat -> QuantumRel Y Z) (R : QuantumRel X Y) :
  relComp (relISup S) R = relISup (fun n => relComp (S n) R) := by
  sorry

```

### 9.5.85 $S \circ (\bigcup R) = \bigcup (S \circ R)$

**Statement.**  $S \circ (\bigcup R) = \bigcup (S \circ R)$ . Formally:  $\text{relComp } S (\text{relISup } R) = \text{relISup } (\text{fun } n \Rightarrow \text{relComp } S (R n))$ .

**Proof.** The claim follows directly from the definitions of the objects involved.

#### Lean 4 source Challenge.lean

```

theorem quantumRel_comp_iSup_right {X Y Z : QuantumSet}
  (S : QuantumRel Y Z) (R : Nat -> QuantumRel X Y) :
  relComp S (relISup R) = relISup (fun n => relComp S (R n)) := by
  sorry

```

### 9.5.86 $1 \circ R = R$ , when the codomain atoms are decidable

**Statement.**  $1 \circ R = R$ , when the codomain atoms are decidable. Formally:  $\text{relComp } (\text{relId } Y \text{ h}) R = R$ .

**Proof.** The claim follows directly from the definitions of the objects involved.

#### Lean 4 source Challenge.lean

```

theorem quantumRel_id_comp {X Y : QuantumSet} (hY : quantumDecEq Y)
  (R : QuantumRel X Y) :
  relComp (relId Y hY) R = R := by
  sorry

```

### 9.5.87 $R \circ 1 = R$ , when the domain atoms are decidable

**Statement.**  $R \circ 1 = R$ , when the domain atoms are decidable. Formally:  $\text{relComp } R (\text{relId } X \text{ h}) = R$ .

**Proof.** The claim follows directly from the definitions of the objects involved.

#### Lean 4 source Challenge.lean

```
theorem quantumRel_comp_id {X Y : QuantumSet} (hX : quantumDecEq X)
  (R : QuantumRel X Y) :
  relComp R (relId X hX) = R := by
  sorry
```

### 9.5.88 The discrete qubit is a quantum CPO

**Statement.** The discrete qubit is a quantum CPO. Formally: `isQuantumCPO qubitPoset`.

**Proof.** The claim follows directly from the definitions of the objects involved.

#### Lean 4 source Challenge.lean

```
theorem qubit_isQuantumCPO : isQuantumCPO qubitPoset := by
  sorry
```

### 9.5.89 Linear is quantum rel category

**Statement.** `quantumLNL.linear` is `qRelCategory`. Formally: `modelLinearObjects = qRelObjects`.

**Proof.** The claim follows directly from the definitions of the objects involved.

#### Lean 4 source Challenge.lean

```
theorem set_qRel_linear_objects : modelLinearObjects = qRelObjects := by
  sorry
```

### 9.5.90 Objects of quantum CPO category are quantum CPOs

**Statement.** Objects of `qCPOCategory` are quantum CPOs. Formally: `qCPOCategoryObjects = quantumCPOCarrier`.

**Proof.** The claim follows directly from the definitions of the objects involved.

#### Lean 4 source Challenge.lean

```
theorem qCPO_category_objects : qCPOCategoryObjects = quantumCPOCarrier := by
  sorry
```

```
/-! ## Section 5: presheaf denotation and recursive-type shift -/
```

### 9.5.91 Section 5: presheaf denotation and recursive-type shift

**Definition.** ## Section 5: presheaf denotation and recursive-type shift.

**Construction.** Defined to be `sorry`.

#### Lean 4 source Challenge.lean

```
noncomputable def ProjChain : Type 1 := sorry
```

### 9.5.92 Definition of the chain point

**Definition.** The chain point of  $C$  is an element of  $\text{Type}$ .

**Construction.** Defined to be `sorry`.

**Lean 4 source** [Challenge.lean](#)

```
noncomputable def ChainPoint (C : ProjChain) : Type := sorry
```

### 9.5.93 Definition of the tail point

**Definition.** The tail point of  $C$  is an element of  $\text{Type}$ .

**Construction.** Defined to be `sorry`.

**Lean 4 source** [Challenge.lean](#)

```
noncomputable def TailPoint (C : ProjChain) : Type := sorry
```

### 9.5.94 Definition of the forward index shift

**Definition.** The forward index shift of  $x$  is an element of  $\text{TailPoint } C$ .

**Construction.** Defined to be `sorry`.

**Lean 4 source** [Challenge.lean](#)

```
noncomputable def shiftForward {C : ProjChain} (x : ChainPoint C) : TailPoint C :=
  sorry
```

### 9.5.95 Definition of the backward index shift

**Definition.** The backward index shift of  $x$  is an element of  $\text{ChainPoint } C$ .

**Construction.** Defined to be `sorry`.

**Lean 4 source** [Challenge.lean](#)

```
noncomputable def shiftBackward {C : ProjChain} (x : TailPoint C) : ChainPoint C :=
  sorry
```

### 9.5.96 Definition of the primitive CP

**Definition.** The primitive CP of  $p$  is an element of  $\text{Type}$ .

**Construction.** Defined to be `sorry`.

**Lean 4 source** [Challenge.lean](#)

```
def PrimCP (p : Prim) : Type := sorry
```

### 9.5.97 Definition of the primitive superoperator

**Definition.** The primitive superoperator of  $p$  is an element of  $\text{PrimCP } p$ .

**Construction.** Defined to be `sorry`.

**Lean 4 source** [Challenge.lean](#)

```
noncomputable def primSuperoperator (p : Prim) : PrimCP p := sorry
```

### 9.5.98 Definition of the primitive completed CP

**Definition.** The primitive completed CP of  $p$  is an element of  $\text{PrimCP } p$ .

**Construction.** Defined to be `sorry`.

**Lean 4 source** [Challenge.lean](#)

```
noncomputable def primCompletedCP (p : Prim) : PrimCP p := sorry
```

### 9.5.99 Definition of the fragment morphism

**Definition.** The fragment morphism is an element of  $\text{Type}$ .

**Construction.** Defined to be `sorry`.

**Lean 4 source** [Challenge.lean](#)

```
def FragmentHom : Type := sorry
```

### 9.5.100 Definition of the measurement branch morphism

**Definition.** The measurement branch morphism is an element of  $\text{Type}$ .

**Construction.** Defined to be `sorry`.

**Lean 4 source** [Challenge.lean](#)

```
def MeasureBranchHom : Type := sorry
```

### 9.5.101 Definition of the denotation closed term measurement new 0

**Definition.** The denotation closed term measurement new 0 is an element of  $\text{FragmentHom}$ .

**Construction.** Defined to be `sorry`.

**Lean 4 source** [Challenge.lean](#)

```
noncomputable def denoteClosedMeasureNew0 : FragmentHom := sorry
```

### 9.5.102 Definition of the measurement elimination closed term new 0

**Definition.** The measurement elimination closed term new 0 is an element of `FragmentHom`.

**Construction.** Defined to be `sorry`.

**Lean 4 source** [Challenge.lean](#)

```
noncomputable def measureElimClosedNew0 : FragmentHom := sorry
```

### 9.5.103 Forward index shift of id on every projection chain

**Statement.**  $\text{shiftForward} \circ \text{shiftBackward} = \text{id}$  on every projection chain. Formally:  $\text{shiftForward} (\text{shiftBackward } x) = x$ .

**Proof.** The claim follows directly from the definitions of the objects involved.

**Lean 4 source** [Challenge.lean](#)

```
theorem shift_forward_backward {C : ProjChain} (x : TailPoint C) :  
  shiftForward (shiftBackward x) = x := by  
  sorry
```

### 9.5.104 Backward index shift of id on every projection chain

**Statement.**  $\text{shiftBackward} \circ \text{shiftForward} = \text{id}$  on every projection chain. Formally:  $\text{shiftBackward} (\text{shiftForward } x) = x$ .

**Proof.** The claim follows directly from the definitions of the objects involved.

**Lean 4 source** [Challenge.lean](#)

```
theorem shift_backward_forward {C : ProjChain} (x : ChainPoint C) :  
  shiftBackward (shiftForward x) = x := by  
  sorry
```

### 9.5.105 Every primitive, including `cx`, has the same completed CP map as its superoperator

**Statement.** Every primitive, including `cx`, has the same completed CP map as its superoperator. Formally:  $\text{primSuperoperator } p = \text{primCompletedCP } p$ .

**Proof.** The claim follows directly from the definitions of the objects involved.

**Lean 4 source** [Challenge.lean](#)

```
theorem prim_cp_agreement (p : Prim) :  
  primSuperoperator p = primCompletedCP p := by  
  sorry
```

### 9.5.106 `cx` agrees with its completed CP map

**Statement.** `cx` agrees with its completed CP map. Formally: `primSuperoperator .cx = primCompletedCP .cx`.

**Proof.** The claim follows directly from the definitions of the objects involved.

#### Lean 4 source Challenge.lean

```
theorem cx_cp_agreement : primSuperoperator .cx = primCompletedCP .cx := by
  sorry
```

### 9.5.107 Denotation of closed measure-fresh zero-qubit allocation equals the measurement elimination spine

**Statement.** `FragCert.denote` of closed measure-new0 equals the `measureElim` spine. Formally: `denoteClosedMeasureNew0 = measureElimClosedNew0`.

**Proof.** The claim follows directly from the definitions of the objects involved.

#### Lean 4 source Challenge.lean

```
theorem measure_elim_denotation :
  denoteClosedMeasureNew0 = measureElimClosedNew0 := by
  sorry
```

```
/-! ## Section 6: staging -/
```

### 9.5.108 Section 6: staging

**Definition.** `## Section 6: staging`.

**Construction.** Defined to be `sorry`.

#### Lean 4 source Challenge.lean

```
def StagingResult (q c : Nat) (M : Term) : Type := sorry
```

### 9.5.109 Definition of the staging succeeds

**Definition.** The staging succeeds of `fuel` and `P` is a proposition-valued predicate, defined below.

**Construction.** Defined to be `sorry`.

#### Lean 4 source Challenge.lean

```
def StagingSucceeds (fuel : Nat) {q c : Nat} {M : Term}
  (P : StagingResult q c M) : Prop := sorry
```



### 9.5.110 Definition of the staging well formed

**Definition.** The staging well formed of  $P$  is a proposition-valued predicate, defined below.

**Construction.** Defined to be `sorry`.

**Lean 4 source** [Challenge.lean](#)

```
def stagingWellFormed {q c : Nat} {M : Term}
  (P : StagingResult q c M) : Prop := sorry
```

### 9.5.111 Definition of the circuit matrix model

**Definition.** The circuit matrix model of  $q$  and  $c$  is an element of `Type`.

**Construction.** Defined to be `sorry`.

**Lean 4 source** [Challenge.lean](#)

```
def CircuitModel (q c : Nat) : Type := sorry
```

### 9.5.112 Definition of the circuit semantic

**Definition.** The circuit semantic of  $q$  and  $c$  is an element of `Type 1`.

**Construction.** Defined to be `sorry`.

**Lean 4 source** [Challenge.lean](#)

```
def CircuitSem (q c : Nat) : Type 1 := sorry
```

### 9.5.113 Definition of the staged denotation

**Definition.** The staged denotation of  $P$  and `model` is an element of `CircuitSem q c`.

**Construction.** Defined to be `sorry`.

**Lean 4 source** [Challenge.lean](#)

```
noncomputable def stagedDenotation {q c : Nat} {M : Term}
  (P : StagingResult q c M) (model : CircuitModel q c) : CircuitSem q c := sorry
```

### 9.5.114 Definition of the compiled denotation

**Definition.** The compiled denotation of  $P$  and `model` is an element of `CircuitSem q c`.

**Construction.** Defined to be `sorry`.

**Lean 4 source** [Challenge.lean](#)

```
noncomputable def compiledDenotation {q c : Nat} {M : Term}
  (P : StagingResult q c M) (model : CircuitModel q c) : CircuitSem q c := sorry
```

### 9.5.115 Definition of the circuit agrees

**Definition.** The circuit agrees of  $a$  and  $b$  is a proposition-valued predicate, defined below.

**Construction.** Defined to be `sorry`.

#### Lean 4 source Challenge.lean

```
def circuitAgrees {q c : Nat} (a b : CircuitSem q c) : Prop := sorry
```

### 9.5.116 Successful elaboration determinism

**Statement.** `elaborates_deterministic`. Formally:  $P = Q$ .

**Proof.** The claim follows directly from the definitions of the objects involved.

#### Lean 4 source Challenge.lean

```
theorem staging_deterministic {q c fuel : Nat} {M : Term}
  {P Q : StagingResult q c M}
  (hP : StagingSucceeds fuel P) (hQ : StagingSucceeds fuel Q) : P = Q := by
  sorry
```

### 9.5.117 Successful elaboration circuit command well formed

**Statement.** `elaborates_command_wellFormed`. Formally: `stagingWellFormed P`.

**Proof.** The claim follows directly from the definitions of the objects involved.

#### Lean 4 source Challenge.lean

```
theorem staging_well_formed {q c fuel : Nat} {M : Term}
  {P : StagingResult q c M} (h : StagingSucceeds fuel P) :
  stagingWellFormed P := by
  sorry
```

### 9.5.118 Successful elaboration compilation agreement: staged command and compiled block agree

**Statement.** `elaborates_compile_agreement`: staged command and compiled block agree. Formally: `circuitAgrees (stagedDenotation P model) (compiledDenotation P model)`.

**Proof.** The claim follows directly from the definitions of the objects involved.

#### Lean 4 source Challenge.lean

```
theorem staging_compile_agreement {q c fuel : Nat} {M : Term}
  {P : StagingResult q c M} (h : StagingSucceeds fuel P)
  (model : CircuitModel q c) :
  circuitAgrees (stagedDenotation P model) (compiledDenotation P model) := by
  sorry
```

```
/-! ## Section 8: OpenQASM -/
```

### 9.5.119 Section 8: OpenQASM

**Definition.** ## Section 8: OpenQASM.

**Construction.** Defined to be `sorry`.

**Lean 4 source** [Challenge.lean](#)

```
def OpenQASMPProgram (q c : Nat) : Type := sorry
```

### 9.5.120 Definition of the parser for OpenQASMs

**Definition.** The parser for OpenQASMs of `q`, `c` and `text` is an element of `Option (OpenQASMPProgram q c)`.

**Construction.** Defined to be `sorry`.

**Lean 4 source** [Challenge.lean](#)

```
def parseOpenQASM (q c : Nat) (text : String) : Option (OpenQASMPProgram q c) := sorry
```

### 9.5.121 Definition of the rendering OpenQASM

**Definition.** The rendering OpenQASM of `P` is an element of `String`.

**Construction.** Defined to be `sorry`.

**Lean 4 source** [Challenge.lean](#)

```
def renderOpenQASM {q c : Nat} (P : OpenQASMPProgram q c) : String := sorry
```

### 9.5.122 Definition of the open QASM well formed

**Definition.** The open QASM well formed of `P` is a proposition-valued predicate, defined below.

**Construction.** Defined to be `sorry`.

**Lean 4 source** [Challenge.lean](#)

```
def openQASMWellFormed {q c : Nat} (P : OpenQASMPProgram q c) : Prop := sorry
```

### 9.5.123 Definition of the export OpenQASM

**Definition.** The export OpenQASM of `P` is an element of `String`.

**Construction.** Defined to be `sorry`.

**Lean 4 source** [Challenge.lean](#)

```
def exportOpenQASM {q c : Nat} (P : OpenQASMPProgram q c)
  (h : openQASMWellFormed P) : String := sorry
```

### 9.5.124 Successful parse renders back to the same text

**Statement.** Successful parse renders back to the same text. Formally:  $\text{renderOpenQASM } P = \text{text}$ .

**Proof.** The claim follows directly from the definitions of the objects involved.

#### Lean 4 source Challenge.lean

```
theorem openqasm_render_roundTrip {q c : Nat} {text : String}
  {P : OpenQASMProgram q c} (h : parseOpenQASM q c text = some P) :
  renderOpenQASM P = text := by
  sorry
```

### 9.5.125 Successful parse exports through OpenQASM rendering to the same text

**Statement.** Successful parse exports through  $\text{toOpenQASM}$  to the same text. Formally:  $\text{exportOpenQASM } P \text{ hP} = \text{text}$ .

**Proof.** The claim follows directly from the definitions of the objects involved.

#### Lean 4 source Challenge.lean

```
theorem openqasm_export_roundTrip {q c : Nat} {text : String}
  {P : OpenQASMProgram q c} (hP : openQASMWellFormed P)
  (h : parseOpenQASM q c text = some P) :
  exportOpenQASM P hP = text := by
  sorry
```

```
/-! ## Section 9: fragment adequacy -/
```

### 9.5.126 Section 9: fragment adequacy

**Definition.** ## Section 9: fragment adequacy.

**Construction.** Defined to be `sorry`.

#### Lean 4 source Challenge.lean

```
noncomputable def ketZeroRegister : RuntimeRegister 1 := sorry
```

### 9.5.127 Definition of the measured new 0 within

**Definition.** The measured new 0 within of  $N$  is a proposition-valued predicate, defined below.

**Construction.** Defined to be `sorry`.

#### Lean 4 source Challenge.lean

```
def measuredNew0Within (N : Nat) : Prop := sorry
```

### 9.5.128 Definition of the fragment measurement branch

**Definition.** The fragment measurement branch of  $b$  is an element of `MeasureBranchHom`.

**Construction.** Defined to be `sorry`.

**Lean 4 source** `Challenge.lean`

```
noncomputable def fragmentMeasureBranch (b : Bool) : MeasureBranchHom := sorry
```

### 9.5.129 Definition of the Yoneda measurement branch

**Definition.** The Yoneda measurement branch of  $b$  is an element of `MeasureBranchHom`.

**Construction.** Defined to be `sorry`.

**Lean 4 source** `Challenge.lean`

```
noncomputable def yonedaMeasureBranch (b : Bool) : MeasureBranchHom := sorry
```

### 9.5.130 Measured fresh zero-qubit allocation in $|0\rangle$ has Born weight 1 on false and 0 on true

**Statement.** Measured `new0` in  $|0\rangle$  has Born weight 1 on false and 0 on true. Formally: `runtimeMeasureProbability ketZeroRegister 0 false = 1`.

**Proof.** The claim follows directly from the definitions of the objects involved.

**Lean 4 source** `Challenge.lean`

```
theorem measured_new0_born_false :  
  runtimeMeasureProbability ketZeroRegister (0 : Fin 1) false = 1 := by  
  sorry
```

### 9.5.131 The measured fresh zero-qubit allocation Born rule true

**Statement.** The runtime measurement probability of the ket zero register and `true` at 0 equals 0.

**Proof.** The claim follows directly from the definitions of the objects involved.

**Lean 4 source** `Challenge.lean`

```
theorem measured_new0_born_true :  
  runtimeMeasureProbability ketZeroRegister (0 : Fin 1) true = 0 := by  
  sorry
```

### 9.5.132 The measured fresh zero-qubit allocation program uses at most $N$ qubits for every $N \geq 1$

**Statement.** The measured `new0` program uses at most  $N$  qubits for every  $N \geq 1$ . Formally: `measuredNew0Within N`.

**Proof.** The claim follows directly from the definitions of the objects involved.

**Lean 4 source** `Challenge.lean`

```
theorem measured_new0_within_bound (N : Nat) (hN : 1 <= N) :
  measuredNew0Within N := by
  sorry
```

### 9.5.133 Fragment measurement branches are the Yoneda branches

**Statement.** Fragment measurement branches are the Yoneda branches. Formally: `fragmentMeasureBranch b = yonedaMeasureBranch b`.

**Proof.** The claim follows directly from the definitions of the objects involved.

#### Lean 4 source Challenge.lean

```
theorem measure_branch_agrees (b : Bool) :
  fragmentMeasureBranch b = yonedaMeasureBranch b := by
  sorry
```

### 9.5.134 Safety of the source of the type

**Statement.** For a term `M`, a type `A`: under 1 hypotheses, the statement asserts 4 properties of the objects involved; the precise formulation is the Lean statement below.

**Proof.** The witness is assembled directly from its components, using the fact that closed well-typed terms are values.

#### Lean 4 source Solution.lean

```
theorem source_type_safety {M : Term} {A : Ty} (h : HasType [] [] M A) :
  MakesProgress M /\
    (forall N, Step M N -> HasType [] [] N A) /\
    (forall b N, MeasStep M b N -> HasType [] [] N A) /\
    (forall N_1 N_2, Step M N_1 -> Step M N_2 -> N_1 = N_2) :=
  <progress h,
    fun _ hs => step_preservation hs h,
    fun _ _ hm => measStep_preservation hm h,
    fun _ _ h_1 h_2 => step_deterministic h_1 h_2>
```

### 9.5.135 Quotation of the capstone

**Statement.** For a circuit command `C`: if `C` is quotable, then an explicit expression in the typing judgement, the reflection and the quotation type equals `C`.

**Proof.** The witness is assembled directly from its components, using the definition of the reflection.

#### Lean 4 source Solution.lean

```
theorem quotation_capstone
  (C : Command quantumSize classicalSize) (hC : Quotable C) :
  HasType [] [] (Quotation.reflect C hC).term quotationTy /\
  (Quotation.reflect C hC).compile = C :=
  <(Quotation.reflect C hC).typing, Quotation.compile_reflect C hC>
```

### 9.5.136 Definition of the runtime register

**Definition.** The runtime register of  $q$  is an element of `Type`.

**Construction.** Defined to be the register state of  $q$ .

**Lean 4 source** [Solution.lean](#)

```
noncomputable def RuntimeRegister (q : Nat) : Type :=
  QLambda.Linear.Runtime.RegisterState q
```

### 9.5.137 Definition of the runtime measurement probability

**Definition.** The runtime measurement probability of  $\rho$ ,  $w$  and  $b$  is a real number.

**Construction.** Defined to be the measurement probability of  $\rho$ ,  $w$ ,  $b$ .

**Lean 4 source** [Solution.lean](#)

```
noncomputable def runtimeMeasureProbability {q : Nat}
  (? : RuntimeRegister q) (w : Fin q) (b : Bool) : Real :=
  QLambda.Linear.Runtime.RegisterState.measureProbability ? w b
```

### 9.5.138 Definition of the runtime config

**Definition.** The runtime config of  $q$  is an element of `Type`.

**Construction.** Defined to be the runtime configuration of  $q$ .

**Lean 4 source** [Solution.lean](#)

```
noncomputable def RuntimeConfig (q : Nat) : Type :=
  QLambda.Linear.Runtime.Config q
```

### 9.5.139 Definition of the runtime well-typedness

**Definition.** The runtime well-typedness of  $s$  and  $A$  is a proposition-valued predicate, defined below.

**Construction.** Defined to be the well-typedness of  $s$  and  $A$ .

**Lean 4 source** [Solution.lean](#)

```
def runtimeWellTyped {q : Nat} (s : RuntimeConfig q) (A : Ty) : Prop :=
  QLambda.Linear.Runtime.Config.WellTyped s A
```

### 9.5.140 Definition of the runtime internal one-step reduction

**Definition.** The runtime internal one-step reduction of  $s$  and  $s'$  is a proposition-valued predicate, defined below.

**Construction.** Defined to be the internal one-step reduction of  $s$  and  $s'$ .

**Lean 4 source** [Solution.lean](#)

```
def runtimeInternalStep {q : Nat} (s s' : RuntimeConfig q) : Prop :=
  QLambda.Linear.Runtime.InternalStep s s'
```

### 9.5.141 Definition of the runtime measurement one-step reduction

**Definition.** The runtime measurement one-step reduction is a proposition-valued predicate, defined below.

**Construction.** Defined to be `Runtime.MeasurementStep s weight outcome s'`.

**Lean 4 source** [Solution.lean](#)

```
def runtimeMeasurementStep {q : Nat} (s : RuntimeConfig q) (weight : Real)
  (outcome : Bool) (s' : RuntimeConfig q) : Prop :=
  QLambda.Linear.Runtime.MeasurementStep s weight outcome s'
```

### 9.5.142 Definition of the runtime normal

**Definition.** The runtime normal of  $s$  is a proposition-valued predicate, defined below.

**Construction.** Defined to be the normal of  $s$ .

**Lean 4 source** [Solution.lean](#)

```
def runtimeNormal {q : Nat} (s : RuntimeConfig q) : Prop :=
  QLambda.Linear.Runtime.Config.Normal s
```

### 9.5.143 Definition of the runtime out of wires

**Definition.** The runtime out of wires of  $s$  is a proposition-valued predicate, defined below.

**Construction.** Defined to be the out of wires of  $s$ .

**Lean 4 source** [Solution.lean](#)

```
def runtimeOutOfWires {q : Nat} (s : RuntimeConfig q) : Prop :=
  QLambda.Linear.Runtime.Config.OutOfWires s
```

### 9.5.144 Runtime of the Born rule of the normalizes

**Statement.** For a natural number  $q$ , an index  $w$ : the sum of the runtime measurement probability of  $\rho$ ,  $w$ , `false` and the runtime measurement probability of  $\rho$ ,  $w$ , `true` equals 1.

**Proof.** The goal is simplified using the definition of the runtime measurement probability and the definition of the runtime register.

**Lean 4 source** [Solution.lean](#)

```
theorem runtime_born_normalizes {q : Nat} (? : RuntimeRegister q) (w : Fin q) :
  runtimeMeasureProbability ? w false + runtimeMeasureProbability ? w true = 1 := by
  unfold RuntimeRegister at ?
  simp [runtimeMeasureProbability] using
    QLambda.Linear.Runtime.RegisterState.measureProbability_false_add_true ? w
```



### 9.5.145 Preservation of typing under the runtime of the internal

**Statement.** For a natural number  $q$ , a type  $A$ : if `runtimeWellTyped s A` and `runtimeInternalStep s s'`, then `runtimeWellTyped s' A`.

**Proof.** It follows from the definition of the runtime config, the definition of the runtime well-typedness, the definition of the runtime internal one-step reduction and the preservation of typing under the internal.

**Lean 4 source Solution.lean**

```
theorem runtime_internal_preservation {q : Nat} {s s' : RuntimeConfig q} {A : Ty}
  (ht : runtimeWellTyped s A) (hs : runtimeInternalStep s s') :
  runtimeWellTyped s' A := by
  unfold RuntimeConfig runtimeWellTyped runtimeInternalStep at *
  exact QLambda.Linear.Runtime.internal_preservation ht hs
```

### 9.5.146 Preservation of typing under the runtime of the measurement

**Statement.** For a natural number  $q$ , a real number  $\text{weight}$ , a bit outcome, a type  $A$ : if `runtimeWellTyped s A` and `runtimeMeasurementStep s weight outcome s'`, then `runtimeWellTyped s' A`.

**Proof.** It follows from the definition of the runtime config, the definition of the runtime well-typedness, the definition of the runtime measurement one-step reduction and the preservation of typing under the measurement.

**Lean 4 source Solution.lean**

```
theorem runtime_measurement_preservation {q : Nat} {s s' : RuntimeConfig q}
  {weight : Real} {outcome : Bool} {A : Ty}
  (ht : runtimeWellTyped s A)
  (hs : runtimeMeasurementStep s weight outcome s') :
  runtimeWellTyped s' A := by
  unfold RuntimeConfig runtimeWellTyped runtimeMeasurementStep at *
  exact QLambda.Linear.Runtime.measurement_preservation ht hs
```

### 9.5.147 Progress for the runtime

**Statement.** For a natural number  $q$ , a type  $A$ : if `runtimeWellTyped s A`, then either `runtimeNormal s` or `runtimeOutOfWires s` or there is  $s'$  such that `runtimeInternalStep s s'` or there is  $\text{weight}$ ,  $\text{outcome}$ ,  $s'$  such that `runtimeMeasurementStep s weight outcome s'`.

**Proof.** The goal is simplified using the definition of the runtime config, the definition of the runtime well-typedness, the definition of the runtime normal and the definition of the runtime out of wires.

**Lean 4 source Solution.lean**

```
theorem runtime_progress {q : Nat} {s : RuntimeConfig q} {A : Ty}
  (ht : runtimeWellTyped s A) :
  runtimeNormal s \/ runtimeOutOfWires s \/
  (exists s', runtimeInternalStep s s') \/
  (exists weight outcome s', runtimeMeasurementStep s weight outcome s') := by
  unfold RuntimeConfig runtimeWellTyped runtimeNormal runtimeOutOfWires
  runtimeInternalStep runtimeMeasurementStep at *
```

```
simp using QLambda.Linear.Runtime.progress ht
```

### 9.5.148 Definition of the quantum set

**Definition.** The quantum set is an element of `Type 1`.

**Construction.** Defined to be the quantum set.

**Lean 4 source Solution.lean**

```
noncomputable def QuantumSet : Type 1 :=
  QLambda.Domain.QuantumSet
```

### 9.5.149 Definition of the quantum relation

**Definition.** The quantum relation of  $X$  and  $Y$  is an element of `Type`.

**Construction.** Defined to be the quantum relation of  $X$  and  $Y$ .

**Lean 4 source Solution.lean**

```
noncomputable def QuantumRel (X Y : QuantumSet) : Type :=
  QLambda.Domain.QuantumRel X Y
```

### 9.5.150 Definition of the rel composite

**Definition.** The rel composite of  $S$  and  $R$  is a quantum relation from  $X$  to  $Z$ .

**Construction.** Defined to be the composite of  $S$  after  $R$ .

**Lean 4 source Solution.lean**

```
noncomputable def relComp {X Y Z : QuantumSet}
  (S : QuantumRel Y Z) (R : QuantumRel X Y) : QuantumRel X Z :=
  QLambda.Domain.QuantumRel.comp S R
```

### 9.5.151 Definition of the rel adjoint

**Definition.** The rel adjoint of  $R$  is a quantum relation from  $Y$  to  $X$ .

**Construction.** Defined to be the adjoint of  $R$ .

**Lean 4 source Solution.lean**

```
noncomputable def relDagger {X Y : QuantumSet}
  (R : QuantumRel X Y) : QuantumRel Y X :=
  QLambda.Domain.QuantumRel.dagger R
```

### 9.5.152 Definition of the rel i supremum

**Definition.** The rel i supremum of  $S$  is a quantum relation from  $X$  to  $Y$ .

**Construction.** Defined to be `@iSup (QuantumRel X Y) Nat (@QuantumRel.instSup SetQuantumRel X Y) S`.

#### Lean 4 source Solution.lean

```
noncomputable def relISup {X Y : QuantumSet}
  (S : Nat -> QuantumRel X Y) : QuantumRel X Y :=
  @iSup
    (QLambda.Domain.QuantumRel (X : QLambda.Domain.QuantumSet) (Y : QLambda.Domain.
      QuantumSet))
    Nat
    (@QLambda.Domain.QuantumRel.instSupSetQuantumRel
      (X : QLambda.Domain.QuantumSet) (Y : QLambda.Domain.QuantumSet))
    S
```

### 9.5.153 Definition of the quantum dec equality

**Definition.** The quantum dec equality of  $X$  is an element of `Type`.

**Construction.** Defined to be the decidable equality of the atom.

#### Lean 4 source Solution.lean

```
def quantumDecEq (X : QuantumSet) : Type :=
  DecidableEq (X : QLambda.Domain.QuantumSet).Atom
```

### 9.5.154 Definition of the rel identity

**Definition.** The rel identity of  $X$  is a quantum relation from  $X$  to  $X$ .

**Construction.** Defined to be `let _ : DecidableEq X.Atom := _h QuantumRel.id X`.

#### Lean 4 source Solution.lean

```
noncomputable def relId (X : QuantumSet) (_h : quantumDecEq X) : QuantumRel X X :=
  let _ : DecidableEq (X : QLambda.Domain.QuantumSet).Atom := _h
  QLambda.Domain.QuantumRel.id (X : QLambda.Domain.QuantumSet)
```

### 9.5.155 Definition of the quantum poset

**Definition.** The quantum poset is an element of `Type 1`.

**Construction.** Defined to be the quantum poset.

#### Lean 4 source Solution.lean

```
noncomputable def QuantumPoset : Type 1 :=
  QLambda.Domain.QuantumPoset
```

### 9.5.156 Definition of the qubit poset

**Definition.** The qubit poset is a quantum poset.

**Construction.** Defined to be the qubit.

**Lean 4 source** [Solution.lean](#)

```
noncomputable def qubitPoset : QuantumPoset :=
  QLambda.Domain.QuantumPoset.qubit
```

### 9.5.157 Definition of the quantum CPO property

**Definition.** The quantum CPO property of  $P$  is a proposition-valued predicate, defined below.

**Construction.** Defined to be the is quantum CPO of  $P$ .

**Lean 4 source** [Solution.lean](#)

```
def isQuantumCPO (P : QuantumPoset) : Prop :=
  QLambda.Domain.IsQuantumCPO P
```

### 9.5.158 Definition of the model linear objects

**Definition.** The model linear objects is an element of  $\text{Type } 1$ .

**Construction.** Defined to be the obj.

**Lean 4 source** [Solution.lean](#)

```
noncomputable def modelLinearObjects : Type 1 :=
  QLambda.Domain.quantumLNL.linear.Obj
```

### 9.5.159 Definition of the quantum rel objects

**Definition.** The quantum rel objects is an element of  $\text{Type } 1$ .

**Construction.** Defined to be the obj.

**Lean 4 source** [Solution.lean](#)

```
noncomputable def qRelObjects : Type 1 :=
  QLambda.Domain.qRelCategory.Obj
```

### 9.5.160 Definition of the quantum CPO category objects

**Definition.** The quantum CPO category objects is an element of  $\text{Type } 1$ .

**Construction.** Defined to be the obj.

**Lean 4 source** [Solution.lean](#)

```
noncomputable def qCPOCategoryObjects : Type 1 :=
  QLambda.Domain.qCPOCategory.Obj
```

### 9.5.161 Definition of the quantum CPO carrier

**Definition.** The quantum CPO carrier is an element of `Type 1`.

**Construction.** Defined to be the quantum CPO.

**Lean 4 source Solution.lean**

```
noncomputable def quantumCPOCarrier : Type 1 :=
  QLambda.Domain.QuantumCPO
```

### 9.5.162 Associativity of the quantum rel

**Statement.** For quantum relations  $T, S, R$ : the rel composite of the rel composite of  $T$  and  $S$  and  $R$  equals the rel composite of  $T$  and the rel composite of  $S$  and  $R$ .

**Proof.** This is an instance of the associativity of composition for quantum relations.

**Lean 4 source Solution.lean**

```
theorem quantumRel_assoc {X Y Z W : QuantumSet}
  (T : QuantumRel Z W) (S : QuantumRel Y Z) (R : QuantumRel X Y) :
  relComp (relComp T S) R = relComp T (relComp S R) :=
  QLambda.Domain.QuantumRel.assoc T S R
```

### 9.5.163 Quantum rel of an adjoint of a composite

**Statement.** For quantum relations  $S, R$ : the rel adjoint of the rel composite of  $S$  and  $R$  equals the rel composite of the rel adjoint of  $R$  and the rel adjoint of  $S$ .

**Proof.** This is an instance of the adjoint of a composite for quantum relations.

**Lean 4 source Solution.lean**

```
theorem quantumRel_dagger_comp {X Y Z : QuantumSet}
  (S : QuantumRel Y Z) (R : QuantumRel X Y) :
  relDagger (relComp S R) = relComp (relDagger R) (relDagger S) :=
  QLambda.Domain.QuantumRel.dagger_comp S R
```

### 9.5.164 Quantum rel of a composite of an indexed supremum, in the left argument

**Statement.** For a quantum relation  $R$ : the rel composite of the rel  $i$  supremum of  $S$  and  $R$  equals the rel  $i$  supremum of  $\text{fun } n \Rightarrow \text{relComp } (S \ n) \ R$ .

**Proof.** The goal is simplified using the definition of the rel composite, the definition of the rel  $i$  supremum, the definition of the quantum relation and the definition of the quantum set.

**Lean 4 source Solution.lean**

```
theorem quantumRel_comp_iSup_left {X Y Z : QuantumSet}
  (S : Nat -> QuantumRel Y Z) (R : QuantumRel X Y) :
  relComp (relISup S) R = relISup (fun n => relComp (S n) R) := by
  simpa [relComp, relISup, QuantumRel, QuantumSet] using
    QLambda.Domain.QuantumRel.comp_iSup_left S R
```

### 9.5.165 Quantum rel of a composite of an indexed supremum, in the right argument

**Statement.** For a quantum relation  $S$ : the rel composite of  $S$  and the rel i supremum of  $R$  equals the rel i supremum of  $\text{fun } n \Rightarrow \text{relComp } S \ (R \ n)$ .

**Proof.** The goal is simplified using the definition of the rel composite, the definition of the rel i supremum, the definition of the quantum relation and the definition of the quantum set.

#### Lean 4 source Solution.lean

```
theorem quantumRel_comp_iSup_right {X Y Z : QuantumSet}
  (S : QuantumRel Y Z) (R : Nat -> QuantumRel X Y) :
  relComp S (relISup R) = relISup (fun n => relComp S (R n)) := by
  simpa [relComp, relISup, QuantumRel, QuantumSet] using
    QLambda.Domain.QuantumRel.comp_iSup_right S R
```

### 9.5.166 Quantum rel of the identity of a composite

**Statement.** For a quantum relation  $R$ : if  $\text{quantumDecEq } Y$ , then the rel composite of the rel identity of  $Y$  and  $R$  equals  $R$ .

**Proof.** The goal is simplified using the definition of the rel composite, the definition of the rel identity, the definition of the quantum relation and the definition of the quantum set.

#### Lean 4 source Solution.lean

```
theorem quantumRel_id_comp {X Y : QuantumSet} (hY : quantumDecEq Y)
  (R : QuantumRel X Y) :
  relComp (relId Y hY) R = R := by
  let _ : DecidableEq (Y : QLambda.Domain.QuantumSet).Atom := hY
  simpa [relComp, relId, QuantumRel, QuantumSet, quantumDecEq] using
    QLambda.Domain.QuantumRel.id_comp R
```

### 9.5.167 Quantum rel of a composite of the identity

**Statement.** For a quantum relation  $R$ : if  $\text{quantumDecEq } X$ , then the rel composite of  $R$  and the rel identity of  $X$  and  $hX$  equals  $R$ .

**Proof.** The goal is simplified using the definition of the rel composite, the definition of the rel identity, the definition of the quantum relation and the definition of the quantum set.

#### Lean 4 source Solution.lean

```
theorem quantumRel_comp_id {X Y : QuantumSet} (hX : quantumDecEq X)
  (R : QuantumRel X Y) :
  relComp R (relId X hX) = R := by
  let _ : DecidableEq (X : QLambda.Domain.QuantumSet).Atom := hX
  simpa [relComp, relId, QuantumRel, QuantumSet, quantumDecEq] using
    QLambda.Domain.QuantumRel.comp_id R
```

### 9.5.168 Qubit of the quantum CPO property

**Statement.** `isQuantumCPO qubitPoset`. Formally: `isQuantumCPO qubitPoset`.

**Proof.** This is an instance of the qubit of the quantum CPO property.

**Lean 4 source Solution.lean**

```
theorem qubit_isQuantumCPO : isQuantumCPO qubitPoset :=
  QLambda.Domain.qubit_isQuantumCPO
```

### 9.5.169 Set of the quantum rel of the linear objects

**Statement.** The model linear objects equals the quantum rel objects. Formally: `modelLinearObjects = qRelObjects`.

**Proof.** By definition. Unfolding the model linear objects turns the left-hand side, the model linear objects, into the right-hand side, the quantum rel objects; the two sides are the same term.

**Lean 4 source Solution.lean**

```
theorem set_qRel_linear_objects : modelLinearObjects = qRelObjects := rfl
```

### 9.5.170 Quantum CPO of the category of the objects

**Statement.** The quantum CPO category objects equals the quantum CPO carrier. Formally: `qCPOCategoryObjects = quantumCPOCarrier`.

**Proof.** By definition. Unfolding the quantum CPO category objects turns the left-hand side, the quantum CPO category objects, into the right-hand side, the quantum CPO carrier; the two sides are the same term.

**Lean 4 source Solution.lean**

```
theorem qCPO_category_objects : qCPOCategoryObjects = quantumCPOCarrier := rfl
```

### 9.5.171 Definition of the projection chain

**Definition.** The projection chain is an element of `Type 1`.

**Construction.** Defined to be the projection chain.

**Lean 4 source Solution.lean**

```
noncomputable def ProjChain : Type 1 :=
  QLambda.Domain.ProjectionChain
```

### 9.5.172 Definition of the chain point

**Definition.** The chain point of `C` is an element of `Type`.

**Construction.** Defined to be the bilimit.

**Lean 4 source Solution.lean**

```
noncomputable def ChainPoint (C : ProjChain) : Type :=
  C.Bilimit
```

### 9.5.173 Definition of the tail point

**Definition.** The tail point of  $C$  is an element of  $\text{Type}$ .

**Construction.** Defined to be the bilimit.

**Lean 4 source Solution.lean**

```
noncomputable def TailPoint (C : ProjChain) : Type :=
  C.tail.Bilimit
```

### 9.5.174 Definition of the forward index shift

**Definition.** The forward index shift of  $x$  is an element of  $\text{TailPoint } C$ .

**Construction.** Defined to be the forward index shift of  $x$ .

**Lean 4 source Solution.lean**

```
noncomputable def shiftForward {C : ProjChain} (x : ChainPoint C) : TailPoint C :=
  C.shiftForward x
```

### 9.5.175 Definition of the backward index shift

**Definition.** The backward index shift of  $x$  is an element of  $\text{ChainPoint } C$ .

**Construction.** Defined to be the backward index shift of  $x$ .

**Lean 4 source Solution.lean**

```
noncomputable def shiftBackward {C : ProjChain} (x : TailPoint C) : ChainPoint C :=
  C.shiftBackward x
```

### 9.5.176 Definition of the primitive CP

**Definition.** The primitive CP of  $p$  is an element of  $\text{Type}$ .

**Construction.** Defined to be the completed CP class of the Hilbert-space dimension of  $p.\text{inputQ}$  and the Hilbert-space dimension of  $p.\text{outputQ}$ .

**Lean 4 source Solution.lean**

```
def PrimCP (p : Prim) : Type :=
  QLambda.Domain.CompletedCP (QLambda.CQ.QDim p.inputQ) (QLambda.CQ.QDim p.outputQ)
```



### 9.5.177 Definition of the primitive superoperator

**Definition.** The primitive superoperator of  $p$  is an element of  $\text{PrimCP } p$ .

**Construction.** Defined to be  $(\text{Prim.superoperator } p).\text{cp.toCompleted}$ .

**Lean 4 source Solution.lean**

```
noncomputable def primSuperoperator (p : Prim) : PrimCP p :=
  (QLambda.Linear.Prim.superoperator p).cp.toCompleted
```

### 9.5.178 Definition of the primitive completed CP

**Definition.** The primitive completed CP of  $p$  is an element of  $\text{PrimCP } p$ .

**Construction.** Defined to be the completed CP class of  $p$ .

**Lean 4 source Solution.lean**

```
noncomputable def primCompletedCP (p : Prim) : PrimCP p :=
  QLambda.Linear.Prim.completedCP p
```

### 9.5.179 Primitive underlying completely positive map of the agreement

**Statement.** For a primitive  $p$ : the primitive superoperator of  $p$  equals the primitive completed CP of  $p$ .

**Proof.** This is an instance of the fact that the intrinsic superoperator and the completed Kraus class of a primitive are the same first-order CP map.

**Lean 4 source Solution.lean**

```
theorem prim_cp_agreement (p : Prim) :
  primSuperoperator p = primCompletedCP p :=
  QLambda.Linear.Prim.superoperator_completedCP p
```

### 9.5.180 Controlled-NOT gate of the underlying completely positive map of the agreement

**Statement.** The primitive superoperator of the controlled-NOT gate equals the primitive completed CP of the controlled-NOT gate. Formally:  $\text{primSuperoperator } .\text{cx} = \text{primCompletedCP } .\text{cx}$ .

**Proof.** This is an instance of the primitive underlying completely positive map of the agreement, applied to the definition of the controlled-NOT gate.

**Lean 4 source Solution.lean**

```
theorem cx_cp_agreement : primSuperoperator .cx = primCompletedCP .cx :=
  prim_cp_agreement .cx
```

### 9.5.181 Definition of the fragment morphism

**Definition.** The fragment morphism is an element of `Type`.

**Construction.** Defined to be the module morphism of the combined of `[]` and the fragment module of a qubit.

#### Lean 4 source `Solution.lean`

```
def FragmentHom : Type :=
  QLambda.Domain.Presheaf.SuperoperatorModule.Hom
    (QLambda.Linear.FragmentContext.combined [] [])
    (QLambda.Linear.fragmentModule .qubit)
```

### 9.5.182 Definition of the denotation closed term measurement new 0

**Definition.** The denotation closed term measurement new 0 is an element of `FragmentHom`.

**Construction.** Defined to be the denotation of `closed_measure_new0_cert`.

#### Lean 4 source `Solution.lean`

```
noncomputable def denoteClosedMeasureNew0 : FragmentHom :=
  QLambda.Linear.FragCert.denote QLambda.Linear.closed_measure_new0_cert
```

### 9.5.183 Definition of the measurement elimination closed term new 0

**Definition.** The measurement elimination closed term new 0 is an element of `FragmentHom`.

**Construction.** Defined by an explicit formula built from the composition, the measurement elimination, the functorial action and the denotation.

#### Lean 4 source `Solution.lean`

```
noncomputable def measureElimClosedNew0 : FragmentHom :=
  QLambda.Domain.Presheaf.SuperoperatorModule.Hom.comp
    (QLambda.Linear.FragCert.measureElim _)
    (QLambda.Domain.Presheaf.SuperoperatorModule.Hom.comp
      (QLambda.Domain.Presheaf.SuperoperatorModule.DayTensor.map
        (QLambda.Linear.FragCert.denote QLambda.Linear.fragCert_app_new0_unit)
        (QLambda.Linear.FragCert.denote QLambda.Linear.fragCert_measure_new0_cont))
      (QLambda.Linear.FragmentContext.combinedOSplit
        QLambda.Linear.CtxUAllBit.nil QLambda.Linear.OSplit.nil))
```

### 9.5.184 Shift of the forward of the backward

**Statement.** The forward index shift of the backward index shift of  $x$  equals  $x$ .

**Proof.** This is an instance of the forward index shift of the backward index shift for projection chains.

#### Lean 4 source `Solution.lean`

```
theorem shift_forward_backward {C : ProjChain} (x : TailPoint C) :
  shiftForward (shiftBackward x) = x :=
  QLambda.Domain.ProjectionChain.shiftForward_shiftBackward C x
```

### 9.5.185 Shift of the backward of the forward

**Statement.** The backward index shift of the forward index shift of  $x$  equals  $x$ .

**Proof.** This is an instance of the backward index shift of the forward index shift for projection chains.

#### Lean 4 source Solution.lean

```
theorem shift_backward_forward {C : ProjChain} (x : ChainPoint C) :  
  shiftBackward (shiftForward x) = x :=  
  QLambda.Domain.ProjectionChain.shiftBackward_shiftForward C x
```

### 9.5.186 Denotation of the measurement of the elimination

**Statement.** The denotation closed term measurement new 0 equals the measurement elimination closed term new 0. Formally: `denoteClosedMeasureNew0 = measureElimClosedNew0`.

**Proof.** This is an instance of the measured-program adequacy: closed measurement new 0 program under qubit-usage bound.

#### Lean 4 source Solution.lean

```
theorem measure_elim_denotation :  
  denoteClosedMeasureNew0 = measureElimClosedNew0 :=  
  (QLambda.Linear.fragment_measured_observable_adequacy 1 (by decide)).2.1
```

### 9.5.187 Definition of the staging result

**Definition.** The staging result of  $q$ ,  $c$  and  $M$  is an element of `Type`.

**Construction.** Defined to be the compilation of  $q$ ,  $c$ ,  $M$ .

#### Lean 4 source Solution.lean

```
def StagingResult (q c : Nat) (M : Term) : Type :=  
  QLambda.Linear.Compilation q c M
```

### 9.5.188 Definition of the staging succeeds

**Definition.** The staging succeeds of `fuel` and  $P$  is a proposition-valued predicate, defined below.

**Construction.** Defined to be the successful elaboration of `fuel`,  $M$ ,  $P$ .

#### Lean 4 source Solution.lean

```
def StagingSucceeds (fuel : Nat) {q c : Nat} {M : Term}  
  (P : StagingResult q c M) : Prop :=  
  QLambda.Linear.Elaborates fuel M P
```

### 9.5.189 Definition of the staging well formed

**Definition.** The staging well formed of  $P$  is a proposition-valued predicate, defined below.

**Construction.** Defined to be the well-formedness.

**Lean 4 source Solution.lean**

```
def stagingWellFormed {q c : Nat} {M : Term}
  (P : StagingResult q c M) : Prop :=
  P.command.WellFormed
```

### 9.5.190 Definition of the circuit matrix model

**Definition.** The circuit matrix model of  $q$  and  $c$  is an element of `Type`.

**Construction.** Defined to be the matrix model of  $q$  and  $c$ .

**Lean 4 source Solution.lean**

```
def CircuitModel (q c : Nat) : Type :=
  QLambda.Composer.Model q c
```

### 9.5.191 Definition of the circuit semantic

**Definition.** The circuit semantic of  $q$  and  $c$  is an element of `Type 1`.

**Construction.** Defined to be the classical–quantum meaning of  $q$  and  $c$ .

**Lean 4 source Solution.lean**

```
def CircuitSem (q c : Nat) : Type 1 :=
  QLambda.CQ.Sem q c
```

### 9.5.192 Definition of the staged denotation

**Definition.** The staged denotation of  $P$  and `model` is an element of `CircuitSem q c`.

**Construction.** Defined to be the denotation of a block of `model` and the compilation.

**Lean 4 source Solution.lean**

```
noncomputable def stagedDenotation {q c : Nat} {M : Term}
  (P : StagingResult q c M) (model : CircuitModel q c) : CircuitSem q c :=
  QLambda.Composer.denoteBlock model P.command.compile
```

### 9.5.193 Definition of the compiled denotation

**Definition.** The compiled denotation of  $P$  and `model` is an element of `CircuitSem q c`.

**Construction.** Defined to be the denotation of `model`.

**Lean 4 source Solution.lean**

```

noncomputable def compiledDenotation {q c : Nat} {M : Term}
  (P : StagingResult q c M) (model : CircuitModel q c) : CircuitSem q c :=
  P.command.denote model

```

### 9.5.194 Definition of the circuit agrees

**Definition.** The circuit agrees of  $a$  and  $b$  is a proposition-valued predicate, defined below.

**Construction.** Defined to be the semantic equality of circuits of  $a$  and  $b$ .

#### Lean 4 source Solution.lean

```

def circuitAgrees {q c : Nat} (a b : CircuitSem q c) : Prop :=
  QLambda.CQ.Eq a b

```

### 9.5.195 Determinism of the staging

**Statement.** For natural numbers  $q, c, \text{fuel}$ , a term  $M$ : if `StagingSucceeds fuel P` and `StagingSucceeds fuel Q`, then  $P = Q$ .

**Proof.** This is an instance of the fact that staging is deterministic for fixed fuel and register bounds, applied to the hypothesis that `StagingSucceeds fuel P` and the hypothesis that `StagingSucceeds fuel Q`.

#### Lean 4 source Solution.lean

```

theorem staging_deterministic {q c fuel : Nat} {M : Term}
  {P Q : StagingResult q c M}
  (hP : StagingSucceeds fuel P) (hQ : StagingSucceeds fuel Q) : P = Q :=
  QLambda.Linear.elaborates_deterministic hP hQ

```

### 9.5.196 Staging of the well of the formed

**Statement.** For natural numbers  $q, c, \text{fuel}$ , a term  $M$ : if `StagingSucceeds fuel P`, then `stagingWellFormed P`.

**Proof.** This is an instance of the generated command satisfies target static well-formedness, applied to the hypothesis that `StagingSucceeds fuel P`.

#### Lean 4 source Solution.lean

```

theorem staging_well_formed {q c fuel : Nat} {M : Term}
  {P : StagingResult q c M} (h : StagingSucceeds fuel P) :
  stagingWellFormed P :=
  QLambda.Linear.elaborates_command_wellFormed h

```

### 9.5.197 Staging of the compilation of the agreement

**Statement.** For natural numbers  $q, c, \text{fuel}$ , a term  $M$ : if `StagingSucceeds fuel P`, then `circuitAgrees (stagedDenotation P model) (compiledDenotation P model)`.

**Proof.** This is an instance of the existing target APIs identify staged-command semantics with the semantics of its structurally compiled Composer block, applied to the hypothesis that `StagingSucceeds fuel P`.

#### Lean 4 source `Solution.lean`

```
theorem staging_compile_agreement {q c fuel : Nat} {M : Term}
  {P : StagingResult q c M} (h : StagingSucceeds fuel P)
  (model : CircuitModel q c) :
  circuitAgrees (stagedDenotation P model) (compiledDenotation P model) :=
  QLambda.Linear.elaborates_compile_agreement h model
```

### 9.5.198 Definition of the OpenQASM program

**Definition.** The OpenQASM program of `q` and `c` is an element of `Type`.

**Construction.** Defined to be the OpenQASM program of the open QASM 3.0 IBM Composer 2026.09, `q`, `c`.

#### Lean 4 source `Solution.lean`

```
def OpenQASMProgram (q c : Nat) : Type :=
  QLambda.Composer.Program QLambda.Composer.Version.openQASM3_0_ibmComposer_2026_09 q
  c
```

### 9.5.199 Definition of the parser for OpenQASMs

**Definition.** The parser for OpenQASMs of `q`, `c` and `text` is an element of `Option (OpenQASMProgram q c)`.

**Construction.** Defined to be the parser for structured programs of `q`, `c`, `text`.

#### Lean 4 source `Solution.lean`

```
def parseOpenQASM (q c : Nat) (text : String) : Option (OpenQASMProgram q c) :=
  QLambda.Composer.parseStructuredProgram q c text
```

### 9.5.200 Definition of the rendering OpenQASM

**Definition.** The rendering OpenQASM of `P` is an element of `String`.

**Construction.** Defined to be the rendering OpenQASM of `P`.

#### Lean 4 source `Solution.lean`

```
def renderOpenQASM {q c : Nat} (P : OpenQASMProgram q c) : String :=
  P.renderOpenQASM
```

### 9.5.201 Definition of the open QASM well formed

**Definition.** The open QASM well formed of  $P$  is a proposition-valued predicate, defined below.

**Construction.** Defined to be the well-formedness.

#### Lean 4 source Solution.lean

```
def openQASMWellFormed {q c : Nat} (P : OpenQASMProgram q c) : Prop :=
  P.WellFormed
```

### 9.5.202 Definition of the export OpenQASM

**Definition.** The export OpenQASM of  $P$  is an element of `String`.

**Construction.** Defined to be the OpenQASM rendering of  $h$ .

#### Lean 4 source Solution.lean

```
def exportOpenQASM {q c : Nat} (P : OpenQASMProgram q c)
  (h : openQASMWellFormed P) : String :=
  P.toOpenQASM h
```

### 9.5.203 OpenQASM rendering of the rendering of the render/parse round trip

**Statement.** For natural numbers  $q, c$ : if `parseOpenQASM q c text = some P`, then the rendering OpenQASM of  $P$  equals `text`.

**Proof.** This is an instance of every accepted structured program renders back byte-for-byte, applied to the hypothesis that `parseOpenQASM q c text = some P`.

#### Lean 4 source Solution.lean

```
theorem openqasm_render_roundTrip {q c : Nat} {text : String}
  {P : OpenQASMProgram q c} (h : parseOpenQASM q c text = some P) :
  renderOpenQASM P = text :=
  QLambda.Composer.parseStructuredProgram_render_roundTrip h
```

### 9.5.204 OpenQASM rendering of the export of the render/parse round trip

**Statement.** For natural numbers  $q, c$ : if `openQASMWellFormed P` and `parseOpenQASM q c text = some P`, then the export OpenQASM of  $P$  and `hP` equals `text`.

**Proof.** This is an instance of the public well-formed renderer also round-trips byte-for-byte after any successful parse, applied to the hypothesis that `openQASMWellFormed P` and the hypothesis that `parseOpenQASM q c text = some P`.

#### Lean 4 source Solution.lean

```
theorem openqasm_export_roundTrip {q c : Nat} {text : String}
  {P : OpenQASMProgram q c} (hP : openQASMWellFormed P)
  (h : parseOpenQASM q c text = some P) :
  exportOpenQASM P hP = text :=
  QLambda.Composer.parseStructuredProgram_toOpenQASM_roundTrip hP h
```

### 9.5.205 Definition of the ket zero register

**Definition.** The ket zero register is an element of `RuntimeRegister 1`.

**Construction.** Defined to be the all-zero register `ket`.

**Lean 4 source** [Solution.lean](#)

```
noncomputable def ketZeroRegister : RuntimeRegister 1 :=
  QLambda.Linear.registerKetZero
```

### 9.5.206 Definition of the measured new 0 within

**Definition.** The measured new 0 within of `N` is a proposition-valued predicate, defined below.

**Construction.** Defined to be the qubit-usage bound of `N` and the measurement new 0 program.

**Lean 4 source** [Solution.lean](#)

```
def measuredNew0Within (N : Nat) : Prop :=
  QLambda.Linear.UsesAtMostQubits N QLambda.Linear.measureNew0Program
```

### 9.5.207 Definition of the measurement branch morphism

**Definition.** The measurement branch morphism is an element of `Type`.

**Construction.** Defined to be the module morphism of the representable module at 2.

**Lean 4 source** [Solution.lean](#)

```
def MeasureBranchHom : Type :=
  QLambda.Domain.Presheaf.SuperoperatorModule.Hom
    (QLambda.Domain.Presheaf.SuperoperatorModule.representable 2)
    (QLambda.Domain.Presheaf.SuperoperatorModule.representable 2)
```

### 9.5.208 Definition of the fragment measurement branch

**Definition.** The fragment measurement branch of `b` is an element of `MeasureBranchHom`.

**Construction.** Defined to be the measurement branch of `b`.

**Lean 4 source** [Solution.lean](#)

```
noncomputable def fragmentMeasureBranch (b : Bool) : MeasureBranchHom :=
  QLambda.Linear.routeAFragmentModel.measureBranch b
```

### 9.5.209 Definition of the Yoneda measurement branch

**Definition.** The Yoneda measurement branch of `b` is an element of `MeasureBranchHom`.

**Construction.** Defined to be the measurement branch Yoneda of `b`.

**Lean 4 source** [Solution.lean](#)



```
noncomputable def yonedaMeasureBranch (b : Bool) : MeasureBranchHom :=
  QLambda.Linear.measureBranchYoneda b
```

### 9.5.210 The measured fresh zero-qubit allocation Born rule false

**Statement.** The runtime measurement probability of the ket zero register and false at 0 equals 1.

**Proof.** This is an instance of the measurement probability of the all-zero register ket of false.

**Lean 4 source Solution.lean**

```
theorem measured_new0_born_false :
  runtimeMeasureProbability ketZeroRegister (0 : Fin 1) false = 1 :=
  QLambda.Linear.measureProbability_registerKetZero_false
```

### 9.5.211 The measured fresh zero-qubit allocation Born rule true

**Statement.** The runtime measurement probability of the ket zero register and true at 0 equals 0.

**Proof.** This is an instance of the measurement probability of the all-zero register ket of true.

**Lean 4 source Solution.lean**

```
theorem measured_new0_born_true :
  runtimeMeasureProbability ketZeroRegister (0 : Fin 1) true = 0 :=
  QLambda.Linear.measureProbability_registerKetZero_true
```

### 9.5.212 The measured fresh zero-qubit allocation within bound

**Statement.** For a natural number N: if  $1 \leq N$ , then measuredNew0Within N.

**Proof.** This is an instance of the measured-program adequacy: closed measurement new 0 program under qubit-usage bound.

**Lean 4 source Solution.lean**

```
theorem measured_new0_within_bound (N : Nat) (hN : 1 <= N) :
  measuredNew0Within N :=
  (QLambda.Linear.fragment_measured_observable_adequacy N hN).1
```

### 9.5.213 The measurement branch agrees

**Statement.** For a bit b: the fragment measurement branch of b equals the Yoneda measurement branch of b.

**Proof.** This is an instance of the measured-program adequacy: closed measurement new 0 program under qubit-usage bound.

**Lean 4 source Solution.lean**

```
theorem measure_branch_agrees (b : Bool) :
  fragmentMeasureBranch b = yonedaMeasureBranch b :=
  (QLambda.Linear.fragment_measured_observable_adequacy 1 (by omega)).2.2.2.2 b
```

---

## 10 Related Work and Novelty Qualification

Weaver introduced quantum relations as operator subspaces. Kornell, Lindenhovius, and Mislove developed quantum posets and quantum CPOs and used them for recursive quantum programming. Selinger and Valiron established linear/nonlinear semantic methods for higher-order quantum computation. Pagani, Selinger, and Valiron gave quantitative semantics, and Tsukada and Asada developed enriched presheaf models with strong recursion and full-abstraction results.

Those works are the semantic foundation and prove stronger paper-level results than claimed here: complete relation homs, arbitrary-join-preserving composition, dagger compactness, quantum-function order, qCPO enrichment, and the lifted recursive LNL model all have explicit literature support. Our novelty claim is therefore limited to Lean formalization of the selected representation and its integration with the typed source and finite circuit pipeline. We list exact declarations. Absence of another proof-assistant implementation from the sources checked is not itself a mathematical priority proof.

---

## 11 References

### References

- [1] A. Kornell, B. Lindenhovius, and M. Mislove, *Quantum CPOs*, 2021, arXiv:2109.02196.
- [2] N. Weaver, *Quantum relations*, Memoirs of the American Mathematical Society 215(1010), 2012.
- [3] A. Jenča and B. Lindenhovius, *Monoidal Quantaloids*, 2025.
- [4] A. Kornell et al., *A Category of Quantum Posets*, 2023.
- [5] A. Kornell et al., *Categories of Quantum CPOs*, arXiv:2406.01816.
- [6] P. Selinger and B. Valiron, *A lambda calculus for quantum computation with classical control*, Mathematical Structures in Computer Science 16(3), 2006.
- [7] M. Pagani, P. Selinger, and B. Valiron, *Applying quantitative semantics to higher-order quantum computing*, POPL, 2014.
- [8] T. Tsukada and K. Asada, *Enriched presheaf model of quantum FPC*, 2024.
- [9] Committee on Publication Ethics (COPE). *Authorship and AI tools: COPE position statement*. 2024. <https://publicationethics.org/guidance/cope-position/authorship-and-ai-tools>
- [10] Anysphere, Inc. *Cursor: AI-native code editor and agent environment*. <https://cursor.com> (accessed 2026).

- [11] xAI. *Grok 4.7*. Model documentation as integrated in Cursor, <https://cursor.com/docs/models> (accessed 2026).
- [12] Anthropic. *Claude Opus 5.5*. Model documentation as integrated in Cursor, <https://cursor.com/docs/models> (accessed 2026).
- [13] OpenAI. *GPT 5.6*. Model documentation as integrated in Cursor, <https://cursor.com/docs/models> (accessed 2026).
- [14] Anysphere, Inc. *Composer 2.5*. Model documentation as integrated in Cursor, <https://cursor.com/docs/models> (accessed 2026).
- 

## 12 Acknowledgments

The human author retains sole responsibility for the mathematical content, the choice of formalization route, and every formal claim in this work. Following standard publisher practice (for example, COPE guidance on authorship and AI tools), no large language model is listed as a co-author.

Lean and this narrative were produced with AI-agent assistance under the author’s direction and review. The trusted proof object is the Lean kernel output, not generated prose or tests. Assistance from the following tools is recorded in `scripts/ai_model_cards.py` and expanded when building `arxiv.tex`:

- **Cursor [Cur26]** — agent-assisted editing in the Cursor IDE for the typed linear calculus, quantum-relation and qCPO developments, the CP-presheaf substrate, circuit quotation, and drafting this narrative. Generated Lean was provisional until it compiled under the pinned toolchain.
  - **xAI Grok 4.7 [Grk47]** — formalization and drafting in Cursor: typed linear syntax and metatheory, the intrinsic CP-map and superoperator-module substrate, first-order type objects, primitive agreement, fragment denotation packaging, and the proved-versus-objective boundary of this narrative. Every emitted proof term was checked by the Lean kernel.
  - **Anthropic Claude Opus 5.5 [Cla55]** — formalization and refactoring in Cursor: Route A fragment denotation, quotation Hom-to-CQ covering-set bridges, N-qubit OpenQASM staging packaging, narrative alignment, and proof cleanup. Every emitted proof term was checked by the Lean kernel.
  - **OpenAI GPT 5.6 [Gpt56]** — substantive Palomar editorial and packaging passes in Cursor (`statement_alignment`, `definition_fidelity`, `literature_notability`, and `synthesis`), plus claim-boundary review against `THEOREMS.md`. Those passes review claims; they do not replace kernel-checked Lean.
  - **Cursor Composer 2.5 [Cmp25]** — lighter Palomar editorial and codebase-navigation passes in Cursor (`classification`, `metadata`, and related packaging checks). Composer assists with repository-local edits; it does not replace kernel-checked Lean.
-

## A Lean module index

Checked by lake build. Repository: <https://github.com/catskillsresearch/qlambda>.

### A.1 QLambda project and Palomar

| Role                                                                                                                                                                                                                           | File                                                  |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------|
| Root import graph for the QLambda library                                                                                                                                                                                      | <a href="#">QLambda.lean</a>                          |
| Basic finite classical–quantum types — Hilbert-space dimension of a register containing $q$ qubits; A fixed finite classical bit store                                                                                         | <a href="#">QLambda/CQ/Basic.lean</a>                 |
| Finite classical–quantum circuit semantics — Observational equality is reflexive; Observational equality is symmetric; Observational equality is transitive; ... (20 declarations)                                             | <a href="#">QLambda/CQ/Domain.lean</a>                |
| Presentation-independent finite-instrument observations — Kraus weakest precondition of the semantic equality of the predecessor for finite instrument computations; Kraus weakest precondition of the unit of the semant. ... | <a href="#">QLambda/CQ/FiniteSemantics.lean</a>       |
| Frozen IBM Composer / OpenQASM inductive syntax — Classical Boolean expressions over the fixed classical register; Typed angle expressions admitted by the normalized target; Instructions accepted by the versioned circ. ... | <a href="#">QLambda/Composer/CircuitSyntax.lean</a>   |
| Compositional denotation of Composer circuits — The meaning of a complete circuit is its CQ denotation; Regard an instrument as a finite computation returning its outcome index; Denotation of a control-flow program of. ... | <a href="#">QLambda/Composer/Denotation.lean</a>      |
| Frozen Composer fixtures — The dynamically controlled X gate OpenQASM parsing succeeds; Well-formedness of the dynamically controlled X gate; The Bell-state program OpenQASM parsing succeeds; ... (7 declarations)           | <a href="#">QLambda/Composer/Fixtures.lean</a>        |
| Canonical matrix semantics for Composer — The T-gate matrix is an isometry; The Pauli-X matrix is an isometry; The Hadamard matrix is an isometry; ... (84 declarations)                                                       | <a href="#">QLambda/Composer/MatrixSemantics.lean</a> |
| Physical interpretation of Composer primitives — Ideal primitive model for one fixed-register Composer circuit                                                                                                                 | <a href="#">QLambda/Composer/Model.lean</a>           |

| Role                                                                                                                                                                                                                            | File                                                        |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------|
| OpenQASM 3 presentation — Export a well-formed normalized program as OpenQASM 3 text; OpenQASM rendering of classical expressions; OpenQASM rendering of angle expressions; ... (9 declarations)                                | <a href="#">QLambda/Composer/OpenQASM.lean</a>              |
| Parser for the rendered OpenQASM interchange fragment — On the exact canonical AST subset, parsing after rendering is identity; Parse the complete, structured, canonical interchange grammar documented at the top of th...    | <a href="#">QLambda/Composer/OpenQASMParser.lean</a>        |
| Serializable source probabilities — The real is at most one; Exactly serializable probability used by the physical compiler; Real denotation of a rational source probability; ... (4 declarations)                             | <a href="#">QLambda/Composer/Probability.lean</a>           |
| Fixed-register Composer programs — One complete fixed-register circuit                                                                                                                                                          | <a href="#">QLambda/Composer/Program.lean</a>               |
| Frozen IBM Composer / OpenQASM circuit syntax                                                                                                                                                                                   | <a href="#">QLambda/Composer/Syntax.lean</a>                |
| Static well-formedness of frozen Composer circuits — A top-level program has no unhandled structured-control transfer; Static gate side conditions not enforced by <code>Fin</code> indices                                     | <a href="#">QLambda/Composer/WellFormed.lean</a>            |
| Presentation-independent finite-dimensional CP maps (completed CP class) — Finite Kraus presentation of a CP map                                                                                                                | <a href="#">QLambda/Domain/CPPresentation.lean</a>          |
| Monotonicity of the map determined by a Kraus family of a composite, in the right argument;                                                                                                                                     | <a href="#">QLambda/Domain/CPPresentationInstances.lean</a> |
| Monotonicity of the map determined by a Kraus family of a composite, in the left argument;                                                                                                                                      |                                                             |
| Associativity of the map determined by a Kraus family of a composite; ... (17 declarations)                                                                                                                                     |                                                             |
| Cartesian closed structure on an enriched category                                                                                                                                                                              | <a href="#">QLambda/Domain/CartesianClosed.lean</a>         |
| Presentation-independent finite-dimensional quantum operations                                                                                                                                                                  | <a href="#">QLambda/Domain/CompletedCP.lean</a>             |
| Completed-CP instruments — Measurement of the probability of the normalization for completed CP classes; Instrument with branches valued in presentation-independent CP maps; Completed CP class of the measurement; ... (5...) | <a href="#">QLambda/Domain/CompletedCPInstrument.lean</a>   |
| Sets as a discretely CPO-enriched category — The discrete enrichment leaves the ordinary Cartesian closed structure of <code>Set</code> unchanged; Ordinary sets and functions, enriched by discrete $\omega$ CPO homs          | <a href="#">QLambda/Domain/DiscreteSet.lean</a>             |
| Categories enriched over pointed $\omega$ CPOs                                                                                                                                                                                  | <a href="#">QLambda/Domain/Enriched.lean</a>                |

| Role                                                                                                                                                                                                                                                     | File                                                               |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------|
| Finite quantum sets — A quantum set is finite when it has finitely many atoms                                                                                                                                                                            | <a href="#">QLambda/Domain/Finite.lean</a>                         |
| Instances from finite                                                                                                                                                                                                                                    | <a href="#">QLambda/Domain/FiniteInstances.lean</a>                |
| $\omega$ CPO-enriched functors — An $\omega$ CPO-enriched functor                                                                                                                                                                                        | <a href="#">QLambda/Domain/Functor.lean</a>                        |
| Linear/nonlinear model (strong monoidal adjunction) — A strong symmetric monoidal adjunction between CPO-enriched categories                                                                                                                             | <a href="#">QLambda/Domain/LNLModel.lean</a>                       |
| Linear/nonlinear structure over $\omega$ CPO-enriched categories                                                                                                                                                                                         | <a href="#">QLambda/Domain/LinearNonlinear.lean</a>                |
| $\omega$ -complete partial orders and pointed fixed points                                                                                                                                                                                               | <a href="#">QLambda/Domain/OmegaCPO.lean</a>                       |
| Cartesian closed structure on pointed $\omega$ CPOs — The ordinary category of pointed $\omega$ CPOs is Cartesian closed; Pointed $\omega$ CPO of continuous maps; Terminal pointed $\omega$ CPO; ... (4 declarations)                                   | <a href="#">QLambda/Domain/OmegaCartesianClosed.lean</a>           |
| $\omega$ CPO-enriched categories — A small category whose homs are pointed $\omega$ CPOs and whose composition is $\omega$ -continuous in each argument                                                                                                  | <a href="#">QLambda/Domain/OmegaCategory.lean</a>                  |
| Isomorphisms in an $\omega$ CPO-enriched category — Isomorphisms in an enriched category                                                                                                                                                                 | <a href="#">QLambda/Domain/OmegaCategoryIso.lean</a>               |
| $\omega$ -complete partial orders — Supremum of an $\omega$ -chain of the const for $\omega$ -complete orders; A partial order with suprema of increasing $\mathbb{N}$ -chains; Monotonicity of the supremum of an $\omega$ -chain; ... (4 declarations) | <a href="#">QLambda/Domain/OmegaComplete.lean</a>                  |
| Instances from $\omega$ -completeness                                                                                                                                                                                                                    | <a href="#">QLambda/Domain/OmegaCompleteInstances.lean</a>         |
| Identity LNL model on pointed $\omega$ CPOs — The identity adjunction supplies a fully concrete classical LNL model; $\omega$ identity functor                                                                                                           | <a href="#">QLambda/Domain/OmegaIdentityLNL.lean</a>               |
| Scott/ $\omega$ -continuous maps — A $\omega$ -continuous map                                                                                                                                                                                            | <a href="#">QLambda/Domain/OmegaMap.lean</a>                       |
| Canonical category of pointed $\omega$ CPOs and $\omega$ -continuous maps — The canonical $\omega$ CPO-enriched category of pointed $\omega$ CPOs and $\omega$ -continuous maps                                                                          | <a href="#">QLambda/Domain/OmegaMapCategory.lean</a>               |
| Cartesian closed structure on $\omega$ -continuous maps — Evaluation is jointly $\omega$ -continuous; Second projection of closed structures; First projection of closed structures; ... (10 declarations)                                               | <a href="#">QLambda/Domain/OmegaMapClosed.lean</a>                 |
| Function space of $\omega$ -continuous maps                                                                                                                                                                                                              | <a href="#">QLambda/Domain/OmegaMapFunctionSpace.lean</a>          |
| Pointwise formula for the supremum of an $\omega$ -chain                                                                                                                                                                                                 | <a href="#">QLambda/Domain/OmegaMapFunctionSpaceInstances.lean</a> |

| Role                                                                                                                                                                                                                                      | File                                                                 |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------|
| Composition for $\omega$ -continuous maps is associative; Least fixed points are monotone in their defining functional; The identity is a left unit for composition for $\omega$ -continuous maps; ... (15 declarations)                  | <a href="#">QLambda/Domain/OmegaMapInstances.lean</a>                |
| Bundled pointed $\omega$ CPO — A bundled $\omega$ -complete partial order                                                                                                                                                                 | <a href="#">QLambda/Domain/OmegaObject.lean</a>                      |
| Instances from $\omega$ -complete object                                                                                                                                                                                                  | <a href="#">QLambda/Domain/OmegaObjectInstances.lean</a>             |
| Symmetric monoidal closed structure on pointed $\omega$ CPOs — The Cartesian tensor also gives the $\omega$ CPO category a symmetric monoidal closed structure                                                                            | <a href="#">QLambda/Domain/OmegaSymmetricMonoidalClosed.lean</a>     |
| Ordinary functors between underlying enriched categories — An ordinary functor between the underlying categories                                                                                                                          | <a href="#">QLambda/Domain/PlainFunctor.lean</a>                     |
| Pointwise additive product of specialized modules                                                                                                                                                                                         | <a href="#">QLambda/Domain/Presheaf/AdditiveProduct.lean</a>         |
| Admissible matrices over pseudo-representable bases — Composition for admissible matrices is associative; Identity matrix, represented canonically by the identity module map; Every module map has its canonical admissi...              | <a href="#">QLambda/Domain/Presheaf/AdmissibleMatrix.lean</a>        |
| Ambient-CP relative bang admissibility (L9)                                                                                                                                                                                               | <a href="#">QLambda/Domain/Presheaf/AmbientCPBang.lean</a>           |
| Ambient-CP relative bang-comult admissibility (L9) — Glue residual at $A = 2$ : ambient-CP degree rows are available; Action is invariant under casting the intermediate fiber dimension; Product of Yoneda unit fibers eq...             | <a href="#">QLambda/Domain/Presheaf/AmbientCPBangAdmissible.lean</a> |
| Ambient-CP comonoid packaging ( $A \leq 1$ ) — Ambient CP exponential comonoid, when it is at most one; L9 positive packaging: ambient-CP relative comonoids for every $A \leq 1$ ; Absolute bang comonoid for $A \leq 1$ , packaged a... | <a href="#">QLambda/Domain/Presheaf/AmbientCPComonoid.lean</a>       |
| Ambient-CP Gate-8 acceptance suite — L8 terminal theorem: architecture boundary plus ambient-CP Gate-8 suite; Gate-8 acceptance suite for ambient CP Day exponential category; Ambient CP of the gate 8 of the test suite                 | <a href="#">QLambda/Domain/Presheaf/AmbientCPGate8TestSuite.lean</a> |
| Ambient-CP module class (L9) — Fiber class restored by the L8 ambient-CP replacement: Bool-additive fibers and joint action at every dimension                                                                                            | <a href="#">QLambda/Domain/Presheaf/AmbientCPModule.lean</a>         |

| Role                                                                                                                                                                                                                           | File                                                                  |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------|
| Instances from ambient CP superoperator module                                                                                                                                                                                 | <a href="#">QLambda/Domain/Presheaf/AmbientCPModuleInstances.lean</a> |
| Countable dual bases of specialized modules — Coefficients respect composition before summing over the intermediate basis; Matrix coefficient of a map relative to two chosen bases; Every representable has the one-elem. . . | <a href="#">QLambda/Domain/Presheaf/Basis.lean</a>                    |
| Basis-generated specialized modules — A specialized module together with an exhibited generalized countable basis; A representable as a basis-generated object                                                                 | <a href="#">QLambda/Domain/Presheaf/BasisGenerated.lean</a>           |
| Bilinear maps of specialized modules — A bilinear, action-preserving map of specialized modules; Postcomposition of a bilinear map by a module morphism; Extensionality for bilinear maps                                      | <a href="#">QLambda/Domain/Presheaf/Bilinear.lean</a>                 |
| Bilinear pointwise sums and Day tensor sum-preservation — Tensoring on the left preserves every defined sum of module maps; Tensoring on the right preserves every defined sum of module maps; Evaluation of an admissibl. . . | <a href="#">QLambda/Domain/Presheaf/BilinearSums.lean</a>             |
| Full category of Day-biorthogonal objects                                                                                                                                                                                      | <a href="#">QLambda/Domain/Presheaf/BiorthogonalCategory.lean</a>     |
| Intrinsic finite-dimensional completely positive maps — Addition of CP maps is addition of their Choi matrices; Trace of a Kraus action is pairing with its input effect; A finite Kraus presentation determines an intri. . . | <a href="#">QLambda/Domain/Presheaf/CPMap.lean</a>                    |
| The reindexing is at most one; The Kronecker product is at most one; Tensor is additive in its first CP-map argument; . . . (50 declarations)                                                                                  | <a href="#">QLambda/Domain/Presheaf/CPMapInstances.lean</a>           |
| Canonical reflexivity (double-dual invertibility) — Exact, non-idempotence-assuming witness that the canonical continuation map of one module is invertible; Package a canonical-reflexivity witness as an isomorphism; T. . . | <a href="#">QLambda/Domain/Presheaf/CanonicalReflexivity.lean</a>     |
| Ordinary category presentation — A small ordinary-category interface used for the concrete full biorthogonal subcategory                                                                                                       | <a href="#">QLambda/Domain/Presheaf/CategoryPresentation.lean</a>     |
| Double-dual classical objects                                                                                                                                                                                                  | <a href="#">QLambda/Domain/Presheaf/Classical.lean</a>                |
| Biorthogonal category and additive products                                                                                                                                                                                    | <a href="#">QLambda/Domain/Presheaf/ClassicalCategory.lean</a>        |



| Role                                                                                                                                                                                                                         | File                                                           |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------|
| Classical monoidal and additive connectives (plan gate 2) — The embed bit matrix is an isometry; If $\neg X$ is reflexive, then so is $\neg\neg X$ ; Double dual of a classical module is reflexive; ... (39 declarations)   | <a href="#">QLambda/Domain/Presheaf/ClassicalMonoidal.lean</a> |
| Classical (biorthogonal) objects — Composition for classical objects is associative; The identity is a left unit for composition for classical objects; The identity is a right unit for composition for classical object... | <a href="#">QLambda/Domain/Presheaf/ClassicalObject.lean</a>   |

| Role                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | File |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|
| Reflexivity of the tensor-unit representable $y(1)$<br>— The tensor unit representable is a classical<br>object; Evaluation is a section of the canonical unit<br>for $y(1)$ ; The<br>tensor pairing is the distinguished element of ...  <br>[QLambda/Domain/Presheaf/ClassicalRepresentableOne.lean] ( <a href="https://github.com/catskillsresearch/qlambda/blob/master/Domain/Presheaf/ClassicalRepresentableOne.lean">https://github.com/catskillsresearch/qlambda/blob/master/Domain/Presheaf/ClassicalRepresentableOne.lean</a> )<br>    Zero module and $y(0)$ classical<br>objects -- There is only one CP<br>map into the zero-dimensional<br>output; The zero module is<br>genuinely fixed by Day double<br>negation; The zero-dimensional<br>representable is canonically<br>Day-re...  <br>[QLambda/Domain/Presheaf/ClassicalZero.lean] ( <a href="https://github.com/catskillsresearch/qlambda/blob/master/Domain/Presheaf/ClassicalZero.lean">https://github.com/catskillsresearch/qlambda/blob/master/Domain/Presheaf/ClassicalZero.lean</a> )<br>    Instances from classical zero<br> <br>[QLambda/Domain/Presheaf/ClassicalZeroInstances.lean] ( <a href="https://github.com/catskillsresearch/qlambda/blob/master/Domain/Presheaf/ClassicalZeroInstances.lean">https://github.com/catskillsresearch/qlambda/blob/master/Domain/Presheaf/ClassicalZeroInstances.lean</a> )<br>    Closed bases over closed<br>coefficient codes -- A countably<br>based module whose coefficient<br>objects all belong to the<br>concretely closed coefficient<br>fragment  <br>[QLambda/Domain/Presheaf/ClosedBasis.lean] ( <a href="https://github.com/catskillsresearch/qlambda/blob/master/Domain/Presheaf/ClosedBasis.lean">https://github.com/catskillsresearch/qlambda/blob/master/Domain/Presheaf/ClosedBasis.lean</a> )<br>    Closed coefficient codes --<br>Passage to superoperator module of<br>the tensor product representable<br>for closed coefficients; Internal<br>hom by a representable remains in<br>the generated coefficient<br>fragment; Passage to superop...  <br>[QLambda/Domain/Presheaf/ClosedCoefficient.lean] ( <a href="https://github.com/catskillsresearch/qlambda/blob/master/Domain/Presheaf/ClosedCoefficient.lean">https://github.com/catskillsresearch/qlambda/blob/master/Domain/Presheaf/ClosedCoefficient.lean</a> )<br>    Closed-generated modules -- A<br>symmetric tensor power is a<br>concrete one-coefficient generated<br>object; The Day tensor of two<br>representables is again a<br>closed-generated object; A module<br>with an exhibited basis from the<br>co...  <br>[QLambda/Domain/Presheaf/ClosedGenerated.lean] ( <a href="https://github.com/catskillsresearch/qlambda/blob/master/Domain/Presheaf/ClosedGenerated.lean">https://github.com/catskillsresearch/qlambda/blob/master/Domain/Presheaf/ClosedGenerated.lean</a> )<br>    The concretely closed<br>generated coefficient fragment  <br>[QLambda/Domain/Presheaf/ClosedGeneration.lean] ( <a href="https://github.com/catskillsresearch/qlambda/blob/master/Domain/Presheaf/ClosedGeneration.lean">https://github.com/catskillsresearch/qlambda/blob/master/Domain/Presheaf/ClosedGeneration.lean</a> )<br>    Abstract commutative Day<br>comonoids -- A commutative<br>comonoid in specialized modules,<br>with comultiplication landing in<br>the genuine Day tensor  <br>[QLambda/Domain/Presheaf/Comonoid.lean] ( <a href="https://github.com/catskillsresearch/qlambda/blob/master/Domain/Presheaf/Comonoid.lean">https://github.com/catskillsresearch/qlambda/blob/master/Domain/Presheaf/Comonoid.lean</a> )<br>    Morphisms of commutative Day | 1530 |

| Role                                                                                                                                                                                                                                                               | File                                                                |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------|
| Concrete Day negation — Day negation is contravariant; The functorial action for Day negations preserves identities; The functorial action for Day negations preserves composition; ... (11 declarations)                                                          | <a href="#">QLambda/Domain/Presheaf/DayNegation.lean</a>            |
| Day tensor bifunctor, braiding, and unitors — Day tensor is a bifunctor on module morphisms; The functorial action for Day tensor products preserves identities; The functorial action for Day tensor products preserves...                                        | <a href="#">QLambda/Domain/Presheaf/DayTensorBasic.lean</a>         |
| Day tensor associators and coherence — The braiding is an involution; Every index of a one-element $\mathbf{Fin}$ is zero; The left unitor of the unit equals the right unitor of the unit; ... (35 declarations)                                                  | <a href="#">QLambda/Domain/Presheaf/DayTensorCoherence.lean</a>     |
| Day tensor universal-property package — Universal-property package for one genuine Day tensor                                                                                                                                                                      | <a href="#">QLambda/Domain/Presheaf/DayTensorPresentation.lean</a>  |
| Representable Day tensor — Tensoring representables is represented by multiplication of their finite dimensions; A bilinear map out of two representables is determined by its value on the two identities; Day tensor pr...                                       | <a href="#">QLambda/Domain/Presheaf/DayTensorRepresentable.lean</a> |
| Countable formal power series — Weakening is extraction of the constant coefficient; Dereliction is extraction of the linear coefficient; The formal power series functorial action preserves identities; ... (23 declarati...                                     | <a href="#">QLambda/Domain/Presheaf/Exponential.lean</a>            |
| Countable formal power series — The tensor-power map preserves identities; The tensor-power map preserves composition; Restriction to homogeneous components is injective; ... (66 declarations)                                                                   | <a href="#">QLambda/Domain/Presheaf/ExponentialCore.lean</a>        |
| Fiber of a specialized superoperator module — A carrier equipped with a relational partial countable sum                                                                                                                                                           | <a href="#">QLambda/Domain/Presheaf/Fiber.lean</a>                  |
| The relation saying that a family has the indicated partial sum in a fiber; Finite $\mathbf{Fin}\ n$ families admit sums under Bool-add (induction + flatten); Glue a summable $\alpha$ -family with a value at none via Bool-add + flatten; ... (10 declarations) | <a href="#">QLambda/Domain/Presheaf/FiberInstances.lean</a>         |
| Basis-generated superoperator modules                                                                                                                                                                                                                              | <a href="#">QLambda/Domain/Presheaf/Generated.lean</a>              |

| Role                                                                                                                                                                                                                                  | File                                                                     |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------|
| Joint action at arbitrary fiber dimension (dimension-indexed action sum) — The ambient module $\text{CPM}(-, A)$ of unrestricted completely positive maps; CPM fibers admit Bool-split sums (unrestricted CP addition); Joint ac. . . | <a href="#">QLambda/Domain/Presheaf/HasActSumFromDim.lean</a>            |
| Instances from dimension-indexed action sum                                                                                                                                                                                           | <a href="#">QLambda/Domain/Presheaf/HasActSumFromDimInstances.lean</a>   |
| Dimension-indexed action sum on CP-map modules                                                                                                                                                                                        | <a href="#">QLambda/Domain/Presheaf/HasActSumFromDim_cpmModule.lean</a>  |
| Dimension-indexed action sum on zero modules                                                                                                                                                                                          | <a href="#">QLambda/Domain/Presheaf/HasActSumFromDim_zeroModule.lean</a> |
| Homomorphisms of specialized superoperator modules — Composition for module morphisms is associative; The identity is a left unit for composition for module morphisms; The identity is a right unit for composition for. . .         | <a href="#">QLambda/Domain/Presheaf/Hom.lean</a>                         |
| Summability of the remove of zero for module morphisms; Summability of the empty family for module morphisms; Components of the zero                                                                                                  | <a href="#">QLambda/Domain/Presheaf/HomInstances.lean</a>                |

| Role                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | File                           |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|
| Representable internal hom and closed adjunction<br>— Uncurrying is the inverse closed correspondence;<br>Currying is evaluation of the two Yoneda<br>correspondences; Concrete right adjoint to<br>tensoring by a representable: [y...  <br>[QLambda/Domain/Presheaf/InternalHomRepresentable.lean] ( <a href="https://github.com/catskillsresearch/qlambda/blob/main/Domain/Presheaf/InternalHomRepresentable.lean">https://github.com/catskillsresearch/qlambda/blob/main/Domain/Presheaf/InternalHomRepresentable.lean</a> )<br>    Presheaf linear/nonlinear<br>sketch (plan gate 4) -- Terminal /<br>tensor-unit classical object<br>available on both sides; Bang<br>comonoid on dimension $A \leq 1$ (linear<br>exponential carrier); Nonlinear<br>side sketch: the same biorth...  <br>[QLambda/Domain/Presheaf/LNL.lean] ( <a href="https://github.com/catskillsresearch/qlambda/blob/main/Domain/Presheaf/LNL.lean">https://github.com/catskillsresearch/qlambda/blob/main/Domain/Presheaf/LNL.lean</a> )<br>    Specialized right module over<br>finite-dimensional superoperators<br>-- A specialized right module over<br>finite-dimensional<br>trace-nonincreasing superoperators<br> <br>[QLambda/Domain/Presheaf/Module.lean] ( <a href="https://github.com/catskillsresearch/qlambda/blob/main/Domain/Presheaf/Module.lean">https://github.com/catskillsresearch/qlambda/blob/main/Domain/Presheaf/Module.lean</a> )<br>    Choi / CMap sum lemmas used<br>by specialized modules -- The<br>basis bra of the effect is at most<br>one; Hence $\text{id}_1 + \text{id}_1$ is not<br>trace-nonincreasing; The gate 3<br>composed family equals the<br>identity; ... (39 declarations)  <br>[QLambda/Domain/Presheaf/ModuleChoiSum.lean] ( <a href="https://github.com/catskillsresearch/qlambda/blob/main/Domain/Presheaf/ModuleChoiSum.lean">https://github.com/catskillsresearch/qlambda/blob/main/Domain/Presheaf/ModuleChoiSum.lean</a> )<br>    Isomorphisms of specialized<br>superoperator modules -- A module<br>isomorphism, used without<br>importing a second categorical<br>interface  <br>[QLambda/Domain/Presheaf/ModuleIso.lean] ( <a href="https://github.com/catskillsresearch/qlambda/blob/main/Domain/Presheaf/ModuleIso.lean">https://github.com/catskillsresearch/qlambda/blob/main/Domain/Presheaf/ModuleIso.lean</a> )<br>    Representable Day tensor and<br>internal hom  <br>[QLambda/Domain/Presheaf/Monoidal.lean] ( <a href="https://github.com/catskillsresearch/qlambda/blob/main/Domain/Presheaf/Monoidal.lean">https://github.com/catskillsresearch/qlambda/blob/main/Domain/Presheaf/Monoidal.lean</a> )<br>    Negation data for double-dual<br>classical objects -- Contravariant<br>negation together with its<br>canonical double-dual unit; The<br>second dual of a module  <br>[QLambda/Domain/Presheaf/NegationData.lean] ( <a href="https://github.com/catskillsresearch/qlambda/blob/main/Domain/Presheaf/NegationData.lean">https://github.com/catskillsresearch/qlambda/blob/main/Domain/Presheaf/NegationData.lean</a> )<br>    Choi-order $\omega$ CPO enrichment --<br>The superoperator is bounded by an <sup>1533</sup><br>$\omega$ -chain supremum; The trace of the<br>Choi matrix equals the trace of<br>the effect; Positive increments of<br>every Choi-increasing TNI chain<br>are summable; ... (38...  <br>[QLambda/Domain/Presheaf/OmegaEnriched.lean] ( <a href="https://github.com/catskillsresearch/qlambda/blob/main/Domain/Presheaf/OmegaEnriched.lean">https://github.com/catskillsresearch/qlambda/blob/main/Domain/Presheaf/OmegaEnriched.lean</a> ) | QLambda/Domain/QuantumRel.lean |

| Role                                                                                                                                                                                                                                                        | File                                                    |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------|
| Atomic restriction and assembly — Restriction to an atom of an adjoint of a composite of itself of the component for quantum relations; Assembly from atoms of the restriction to an atom for quantum relations; Order bo. . .                              | <a href="#">QLambda/Domain/QuantumRelAtoms.lean</a>     |
| Countable joins/meets and composition continuity — Composition of an indexed supremum for quantum relations, in the right argument; Composition of an indexed supremum for quantum relations, in the left argument; Restr. . .                              | <a href="#">QLambda/Domain/QuantumRelChains.lean</a>    |
| Composition, dagger, and quantum functions — The identity of the component is nonzero; A function is a relation satisfying the ordinary graph equations $F \circ F^\dagger \leq I$ and $F^\dagger \circ F \geq I$ ; Identity relation: scalar multiple. . . | <a href="#">QLambda/Domain/QuantumRelComp.lean</a>      |
| Dagger and unit laws for quantum relations — The identity is a left unit for composition for quantum relations; Adjoint of the membership of the span for quantum relations; Adjoint of the composite through for quantum. . .                              | <a href="#">QLambda/Domain/QuantumRelDagger.lean</a>    |
| Unitaries, qubit measurement, and PVM channels — A projection-valued measurement from an atomic system onto a classical finite set; Map induced by a unitary of the functionality for quantum relations; Computational-ba. . .                              | <a href="#">QLambda/Domain/QuantumRelExamples.lean</a>  |
| Quantum-function preservation laws — Right composition by a quantum function preserves countable meets; Composition for functional quantum relations; The function respects order                                                                           | <a href="#">QLambda/Domain/QuantumRelFunction.lean</a>  |
| Instances from quantum relation                                                                                                                                                                                                                             | <a href="#">QLambda/Domain/QuantumRelInstances.lean</a> |
| Quantum posets, functions, and circuit embedding — Square isometries over $\mathbb{C}$ are unitaries; The first-order CP presentation of a unitary quantum function is the singleton Kraus family; Saturated CX as a quantum fun. . .                       | <a href="#">QLambda/Domain/QuantumRelational.lean</a>   |
| Quantum relations                                                                                                                                                                                                                                           | <a href="#">QLambda/Domain/QuantumRelations.lean</a>    |
| Quantum sets                                                                                                                                                                                                                                                | <a href="#">QLambda/Domain/QuantumSet.lean</a>          |
| Instances from quantum set                                                                                                                                                                                                                                  | <a href="#">QLambda/Domain/QuantumSetInstances.lean</a> |
| Quantum sets                                                                                                                                                                                                                                                | <a href="#">QLambda/Domain/QuantumSets.lean</a>         |

| Role                                                                                                                                                                                                                            | File                                                              |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------|
| Recursive objects (fold/unfold solutions) — A fold/unfold solution of a locally continuous recursive-object equation                                                                                                            | <a href="#">QLambda/Domain/RecursiveObject.lean</a>               |
| Bilimits of finite recursive-type approximants                                                                                                                                                                                  | <a href="#">QLambda/Domain/RecursiveTypes.lean</a>                |
| Scott-continuous quantum functions — Identity is Scott continuous; Lemma 3.1.2: an internal limit is exactly the external hom supremum; The identity is a left unit for composition for Scott-continuous functions; ... (20...) | <a href="#">QLambda/Domain/ScottFunction.lean</a>                 |
| Composition is monotone in its left argument; Composition is monotone in its right argument; Composition preserves hom suprema in its left argument; ... (10 declarations)                                                      | <a href="#">QLambda/Domain/ScottFunctionInstances.lean</a>        |
| Discrete-order set homs — An ordinary function equipped with the discrete equality order                                                                                                                                        | <a href="#">QLambda/Domain/SetHom.lean</a>                        |
| Extensionality for set maps; Set map of the identity; Composition of set maps                                                                                                                                                   | <a href="#">QLambda/Domain/SetHomInstances.lean</a>               |
| Symmetric monoidal closed structure on an enriched category                                                                                                                                                                     | <a href="#">QLambda/Domain/SymmetricMonoidalClosed.lean</a>       |
| Bottom element on quantum relations                                                                                                                                                                                             | <a href="#">QLambda/Domain/instBotQuantumRel.lean</a>             |
| Bounded order on quantum relations                                                                                                                                                                                              | <a href="#">QLambda/Domain/instBoundedOrderQuantumRel.lean</a>    |
| Coercion to functions on $\omega$ -continuous maps                                                                                                                                                                              | <a href="#">QLambda/Domain/instCoeFunOmegaMap.lean</a>            |
| Coercion to functions on set maps                                                                                                                                                                                               | <a href="#">QLambda/Domain/instCoeFunSetHom.lean</a>              |
| Coercion on Scott-continuous functions                                                                                                                                                                                          | <a href="#">QLambda/Domain/instCoeScottFunction.lean</a>          |
| Coercion to types on $\omega$ -complete objects                                                                                                                                                                                 | <a href="#">QLambda/Domain/instCoeSortOmegaObject.lean</a>        |
| Greatest-lower-bound property of the infimum for quantum relations; Least-upper-bound property of the supremum for quantum relations; Complete lattice structure on quantum relations                                           | <a href="#">QLambda/Domain/instCompleteLatticeQuantumRel.lean</a> |
| Decidable equality on atoms of a quantum set of a classical set                                                                                                                                                                 | <a href="#">QLambda/Domain/instDecidableEqLiftSetAtom.lean</a>    |
| Decidable equality on atoms of a sum                                                                                                                                                                                            | <a href="#">QLambda/Domain/instDecidableEqSumAtom.lean</a>        |
| Decidable equality on atoms of a tensor product                                                                                                                                                                                 | <a href="#">QLambda/Domain/instDecidableEqTensorAtom.lean</a>     |
| Finiteness on atomic quantum sets                                                                                                                                                                                               | <a href="#">QLambda/Domain/instFiniteAtomic.lean</a>              |
| Finiteness on bits                                                                                                                                                                                                              | <a href="#">QLambda/Domain/instFiniteBit.lean</a>                 |

| Role                                                                                                                                                                                                                                                         | File                                                                |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------|
| Finiteness on empties                                                                                                                                                                                                                                        | <code>QLambda/Domain/instFiniteEmpty.lean</code>                    |
| Finiteness on quantum sets of a classical set                                                                                                                                                                                                                | <code>QLambda/Domain/instFiniteLiftSet.lean</code>                  |
| Finiteness on qubits                                                                                                                                                                                                                                         | <code>QLambda/Domain/instFiniteQubit.lean</code>                    |
| Finiteness on sums                                                                                                                                                                                                                                           | <code>QLambda/Domain/instFiniteSum.lean</code>                      |
| Finiteness on tensor products                                                                                                                                                                                                                                | <code>QLambda/Domain/instFiniteTensor.lean</code>                   |
| Finiteness on units                                                                                                                                                                                                                                          | <code>QLambda/Domain/instFiniteUnit.lean</code>                     |
| Finite enumeration on atoms of a quantum set of a classical set                                                                                                                                                                                              | <code>QLambda/Domain/instFintypeLiftSetAtom.lean</code>             |
| Arbitrary meets on quantum relations                                                                                                                                                                                                                         | <code>QLambda/Domain/instInfSetQuantumRel.lean</code>               |
| Distinguished inhabitant on atoms of an atomic quantum set                                                                                                                                                                                                   | <code>QLambda/Domain/instInhabitedAtomicAtom.lean</code>            |
| Distinguished inhabitant on atoms of a qubit                                                                                                                                                                                                                 | <code>QLambda/Domain/instInhabitedQubitAtom.lean</code>             |
| Distinguished inhabitant on atoms of a unit                                                                                                                                                                                                                  | <code>QLambda/Domain/instInhabitedUnitAtom.lean</code>              |
| Order relation on atoms of a quantum set of a classical set                                                                                                                                                                                                  | <code>QLambda/Domain/instLELiftSetAtom.lean</code>                  |
| Order relation on $\omega$ -continuous maps                                                                                                                                                                                                                  | <code>QLambda/Domain/instLEOmegaMap.lean</code>                     |
| Order relation on quantum functions                                                                                                                                                                                                                          | <code>QLambda/Domain/instLEQuantumFunction.lean</code>              |
| Order relation on quantum relations                                                                                                                                                                                                                          | <code>QLambda/Domain/instLEQuantumRel.lean</code>                   |
| Order relation on Scott-continuous functions                                                                                                                                                                                                                 | <code>QLambda/Domain/instLEScottFunction.lean</code>                |
| Order relation on set maps                                                                                                                                                                                                                                   | <code>QLambda/Domain/instLESetHom.lean</code>                       |
| Lattice structure on quantum relations                                                                                                                                                                                                                       | <code>QLambda/Domain/instLatticeQuantumRel.lean</code>              |
| Proposition 3.3.1: the limit of a chain of Scott-continuous functions is Scott continuous; Scott limit of the least-upper-bound property for Scott-continuous functions; Scott limit of the convergence for Scott-continuous functions; ... (4 declarations) | <code>QLambda/Domain/instOmegaComplete.lean</code>                  |
| $\omega$ -completeness on $\omega$ -continuous maps                                                                                                                                                                                                          | <code>QLambda/Domain/instOmegaCompleteFunctionSpace.lean</code>     |
| $\omega$ -completeness on ds                                                                                                                                                                                                                                 | <code>QLambda/Domain/instOmegaCompleteOfCompleteLattice.lean</code> |
| $\omega$ -completeness on ds                                                                                                                                                                                                                                 | <code>QLambda/Domain/instOmegaCompleteProd.lean</code>              |



| Role                                                                                                                                                                                                        | File                                                                |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------|
| $\omega$ -completeness on set maps                                                                                                                                                                          | <a href="#">QLambda/Domain/instOmegaCompleteSetHom.lean</a>         |
| Least element on $\omega$ -continuous maps                                                                                                                                                                  | <a href="#">QLambda/Domain/instOrderBotOmegaMap.lean</a>            |
| Partial order on atoms of a quantum set of a classical set                                                                                                                                                  | <a href="#">QLambda/Domain/instPartialOrderLiftSetAtom.lean</a>     |
| Extensionality for $\omega$ -continuous maps; Partial order on $\omega$ -continuous maps                                                                                                                    | <a href="#">QLambda/Domain/instPartialOrderOmegaMap.lean</a>        |
| The fifth characterization of the pointwise order from KLM Lemma 2.6.6; Quantum-function homs carry the published pointwise partial order; Monotonicity of the restriction to an atom; ... (4 declarations) | <a href="#">QLambda/Domain/instPartialOrderQuantumFunction.lean</a> |
| Partial order on quantum relations                                                                                                                                                                          | <a href="#">QLambda/Domain/instPartialOrderQuantumRel.lean</a>      |
| Partial order on Scott-continuous functions                                                                                                                                                                 | <a href="#">QLambda/Domain/instPartialOrderScottFunction.lean</a>   |
| An increasing chain in a discrete order is constant; Partial order on set maps                                                                                                                              | <a href="#">QLambda/Domain/instPartialOrderSetHom.lean</a>          |
| Preorder on CP presentations                                                                                                                                                                                | <a href="#">QLambda/Domain/instPreorderCPPresentation.lean</a>      |
| Preorder on atoms of a quantum set of a classical set                                                                                                                                                       | <a href="#">QLambda/Domain/instPreorderLiftSetAtom.lean</a>         |
| Meet-semilattice structure on quantum relations                                                                                                                                                             | <a href="#">QLambda/Domain/instSemilatticeInfQuantumRel.lean</a>    |
| Join-semilattice structure on quantum relations                                                                                                                                                             | <a href="#">QLambda/Domain/instSemilatticeSupQuantumRel.lean</a>    |
| Arbitrary joins on quantum relations                                                                                                                                                                        | <a href="#">QLambda/Domain/instSupSetQuantumRel.lean</a>            |
| Top element on quantum relations                                                                                                                                                                            | <a href="#">QLambda/Domain/instTopQuantumRel.lean</a>               |
| Unique inhabitant on atoms of an atomic quantum set                                                                                                                                                         | <a href="#">QLambda/Domain/instUniqueAtomicAtom.lean</a>            |
| Unique inhabitant on atoms of a qubit                                                                                                                                                                       | <a href="#">QLambda/Domain/instUniqueQubitAtom.lean</a>             |
| Unique inhabitant on atoms of a unit                                                                                                                                                                        | <a href="#">QLambda/Domain/instUniqueUnitAtom.lean</a>              |
| Finite instrument computations                                                                                                                                                                              | <a href="#">QLambda/FiniteInstrumentComp.lean</a>                   |
| Finite Kraus families — Operator-sum is Loewner-monotone; The empty family is the zero CP map; Composition for Kraus families is associative; ... (68 declarations)                                         | <a href="#">QLambda/KrausFamily.lean</a>                            |
| Instances from Kraus family                                                                                                                                                                                 | <a href="#">QLambda/KrausFamilyInstances.lean</a>                   |

| Role                                                                                                                                                                                                                                | File                                                    |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------|
| Typed first-order circuit normal form — Well-formed supported target circuits have well-formed exact representatives as linear circuit normal forms; The normal form has exactly the target’s ideal CQ meaning; Static co...        | <a href="#">QLambda/Linear/Circuit.lean</a>             |
| Proof-carrying first-order compilations — A successful compilation is proof-carrying                                                                                                                                                | <a href="#">QLambda/Linear/Compilation.lean</a>         |
| Finite-register runtime configurations — Allocation is the only capacity-sensitive request; Static configuration typing: the control has the requested source type; A fixed finite quantum register and a quantum-kernel...         | <a href="#">QLambda/Linear/Config.lean</a>              |
| Linear contexts — No linear index is marked; A looked-up entry is a member of the list; The cell insertion is bounded by a length; ... (37 declarations)                                                                            | <a href="#">QLambda/Linear/Context.lean</a>             |
| Denotation boundary for the typed linear calculus — Concrete computational-basis qubit measurement as a two-branch completed CP instrument; Number of quantum input wires used by a primitive in its first-order CP meani...        | <a href="#">QLambda/Linear/Denotation.lean</a>          |
| Exact source meaning modulo deterministic classical computation; Exactness of the unrestricted $\beta$ -reduction; Exactness of the unfolding of the fold; ... (9 declarations)                                                     | <a href="#">QLambda/Linear/DenotationInstances.lean</a> |
| Deterministic CBV staging — Recursion and recursive types are rejected before staging; Staging is deterministic for fixed fuel and register bounds; Erase certificates when only the generated command is needed; ... (41 d...      | <a href="#">QLambda/Linear/Elaboration.lean</a>         |
| Checked linear examples — The Bell-state program is well typed; The identity on a qubit is well typed; The X-basis measurement is well typed; ... (25 declarations)                                                                 | <a href="#">QLambda/Linear/Examples.lean</a>            |
| Fragment soundness and first-order observable adequacy — Fragment terms are preserved by classical linear $\beta$ -reduction; Closed bit observation: denotation is the Route A bit literal; Fragment terms are preserved by cla... | <a href="#">QLambda/Linear/FragmentAdequacy.lean</a>    |
| Explicit fragment <code>ite</code> branching interface — The sole effect not supplied by symmetric monoidal closed structure: selection between two already-denoted branches                                                        | <a href="#">QLambda/Linear/FragmentBranching.lean</a>   |

| Role                                                                                                                                                                                                                         | File                                                                                               |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|
| Classical bit channel counit and cocommutativity lemmas — The bit cocommutativity left equals a copy; Discard is insensitive to computational-basis dephasing; Left discard-after-copy is identity after restricting to c... | <a href="#">QLambda/Linear/FragmentClassicalBitChannels.lean</a>                                   |
| $(\Psi \otimes \text{id})$ at copy indices equals the triple-copy Choi formula — $\Psi$ map of a tensor product of the identity at the copy                                                                                  | <a href="#">QLambda/Linear/FragmentClassicalBitCoassoc/Psi_tensor_id_at_copy.lean</a>              |
| Bit coassociativity left definition — Left coassociativity composite, including the Day/tensor associator                                                                                                                    | <a href="#">QLambda/Linear/FragmentClassicalBitCoassoc/bitCoassocLeft.lean</a>                     |
| Bit coassociativity left pre-composite definition — Left parenthesization of classical copy-after-dephase, before reassociation                                                                                              | <a href="#">QLambda/Linear/FragmentClassicalBitCoassoc/bitCoassocLeftPre.lean</a>                  |
| Left coassoc pre Choi (closed form) — Closed Choi form of the left coassociativity composite (sans identity associator)                                                                                                      | <a href="#">QLambda/Linear/FragmentClassicalBitCoassoc/bitCoassocLeftPre_choi.lean</a>             |
| Left coassoc pre Choi collapses to a single tensor entry — After expanding $(\Psi \otimes \text{id}) \circ \text{copy}$ and substituting the copy Choi                                                                       | <a href="#">QLambda/Linear/FragmentClassicalBitCoassoc/bitCoassocLeftPre_choi_collapsed.lean</a>   |
| Bit coassociativity left equals the pre-associator form — The bit coassociativity left equals a pre-composite                                                                                                                | <a href="#">QLambda/Linear/FragmentClassicalBitCoassoc/bitCoassocLeft_eq_pre.lean</a>              |
| Classical copy-after-dephase is coassociative                                                                                                                                                                                | <a href="#">QLambda/Linear/FragmentClassicalBitCoassoc/bitCoassocLeft_eq_right.lean</a>            |
| Bit coassociativity right definition — Right coassociativity composite                                                                                                                                                       | <a href="#">QLambda/Linear/FragmentClassicalBitCoassoc/bitCoassocRight.lean</a>                    |
| Right coassoc Choi (closed form) — Closed Choi form of the right coassociativity composite                                                                                                                                   | <a href="#">QLambda/Linear/FragmentClassicalBitCoassoc/bitCoassocRight_choi.lean</a>               |
| Right coassoc Choi collapses to a single tensor entry — After expanding $(\text{id} \otimes \Psi) \circ \text{copy}$ and substituting the copy Choi                                                                          | <a href="#">QLambda/Linear/FragmentClassicalBitCoassoc/bitCoassocRight_choi_collapsed.lean</a>     |
| Classical copy Choi (closed form) — Choi matrix of classical copy: support on the computational copy subspace; Bit copy of the Choi matrix of a pair                                                                         | <a href="#">QLambda/Linear/FragmentClassicalBitCoassoc/bitCopy_choi.lean</a>                       |
| Copy $\circ$ dephase Choi (entrywise) — Bit copy of a composite of the dephase of the Choi matrix                                                                                                                            | <a href="#">QLambda/Linear/FragmentClassicalBitCoassoc/bitCopy_comp_dephase_choi.lean</a>          |
| Copy $\circ$ dephase Choi (pair form) — Pair-form of the copy $\circ$ dephase Choi formula, for rewriting under tensor                                                                                                       | <a href="#">QLambda/Linear/FragmentClassicalBitCoassoc/bitCopy_comp_dephase_raw_choi_pair.lean</a> |

| Role                                                                                                                                                                                                                                    | File                                                                                              |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|
| Copy intermediate index $3 \cdot k$ — Copy’s Choi selects a single intermediate pair, collapsing composition sums; The unique $\text{Fin } 4$ index with value $3 \cdot k$ ; Equality with copy index of the equivalence                | <a href="#">QLambda/Linear/FragmentClassicalBitCoassoc/copyIdx.lean</a>                           |
| $(\text{id} \otimes \Psi)$ at copy indices equals the triple-copy Choi formula — Identity of a tensor product of the $\Psi$ map at the copy                                                                                             | <a href="#">QLambda/Linear/FragmentClassicalBitCoassoc/id_tensor_Psi_at_copy.lean</a>             |
| Identity channel Choi (pair form) — Identity of the Choi matrix of a pair                                                                                                                                                               | <a href="#">QLambda/Linear/FragmentClassicalBitCoassoc/identity_choi_pair.lean</a>                |
| Tensor associator equiv on $2 \otimes 2 \otimes 2$ — The $2 \otimes 2 \otimes 2$ associator is the identity on the shared $\text{Fin } 8$ encoding                                                                                      | <a href="#">QLambda/Linear/FragmentClassicalBitCoassoc/tensorAssociatorEquiv_two_two_two.lean</a> |
| Tensor associator superoperator on $2 \otimes 2 \otimes 2$ — Tensor associator of the two of the two of the two                                                                                                                         | <a href="#">QLambda/Linear/FragmentClassicalBitCoassoc/tensorAssociator_two_two_two.lean</a>      |
| Triple-copy classical Choi formula — Closed Choi formula for classical triple copy on $\text{Fin } 8 \times \text{Fin } 2$                                                                                                              | <a href="#">QLambda/Linear/FragmentClassicalBitCoassoc/tripleCopyChoi.lean</a>                    |
| Classical bit module, inclusion, weakening, and contraction — Forget that a bit map is dephasing-fixed; Classical bits are fixed points of bit classicalize; Computational-basis preparations are fixed by dephasing; ... (...          | <a href="#">QLambda/Linear/FragmentClassicalBitModule.lean</a>                                    |
| Fragment denotational coherence (Route A)                                                                                                                                                                                               | <a href="#">QLambda/Linear/FragmentCoherence.lean</a>                                             |
| Fragment denotational coherence core (Route A) — Unit and bit literals are values, so no closed one-step reduction applies; Classical <code>ite false</code> redex denotation expands through the controlled eliminator and the fals... | <a href="#">QLambda/Linear/FragmentCoherenceCore.lean</a>                                         |
| Open fragment context objects (Route A)                                                                                                                                                                                                 | <a href="#">QLambda/Linear/FragmentContext.lean</a>                                               |
| Classical-bit Day comonoid for fragment contexts — Classical-bit contraction is invariant under Day braiding; The dephasing-fixed classical bit is a commutative Day comonoid; Classical-bit contraction is coassociative...            | <a href="#">QLambda/Linear/FragmentContextComonoid.lean</a>                                       |
| Fragment context Day closed structure — Uncurrying through Day closedness is evaluation after applying the curried map in the first Day factor; First order from representable of a composite of the passage to represent...            | <a href="#">QLambda/Linear/FragmentContextDay.lean</a>                                            |

| Role                                                                                                                                                                                                                                                                                                        | File                                                                                                   |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|
| Fragment context objects (Route A) — Linear context object; absent cells are tensor units; Discard an unrestricted context whose entries are all classical bits; Structural unrestricted lookup (computes without elimina. . .                                                                              | <a href="#">QLambda/Linear/FragmentContextObjects.lean</a>                                             |
| Fragment context splits and combined maps — Empty combined split is the Day-unit pairing $\lambda^{-1} \otimes \lambda^{-1}$ ; Structural Day split on the underlying lists (computes without eliminating ordered context split); Day split induce. . .                                                     | <a href="#">QLambda/Linear/FragmentContextSplit.lean</a>                                               |
| Concrete fragment denotation (Route A) — Fragment binder discipline: linear binders are first-order; unrestricted binders are classical bits; Reconstruct the canonical fragment judgment from ordinary typing plus the e. . .                                                                              | <a href="#">QLambda/Linear/FragmentDenotation.lean</a>                                                 |
| Full compositional fragment denotation model — Operations required for full compositional fragment denotation                                                                                                                                                                                               | <a href="#">QLambda/Linear/FragmentDenotationModel.lean</a>                                            |
| Denotation constructor equations and independence — The denotation of the unrestricted lambda abstraction does not depend on the choice of proof; The denotation of the linear lambda abstraction does not depend on the. . .                                                                               | <a href="#">QLambda/Linear/FragmentDenoteEq.lean</a>                                                   |
| Closed identity $\beta$ on denotation — F4b foothold: substituting a value for linear <code>var 0</code> is the value (definitionally on terms); Fragment certificate of the linear variable at index zero of the bit of the denotation of. . .                                                             | <a href="#">QLambda/Linear/FragmentIdentityBeta.lean</a>                                               |
| Fragment <code>ite</code> eliminator and Route A denotation Representable <code>ite</code> $\beta$ on bit literals — Conditional elimination representable of a composite of the bit literal of false; Conditional elimination representable of a composite of the bit literal of true; Conditional el. . . | <a href="#">QLambda/Linear/FragmentIte.lean</a><br><a href="#">QLambda/Linear/FragmentIteBeta.lean</a> |
| Fragment conditional elimination and Route A denotation — Recursively build conditional elimination by inspecting the result type; Lift an eliminator on <code>N</code> to one on <code>[X, N]</code> via Day closedness; Transport an <code>ite</code> el. . .                                             | <a href="#">QLambda/Linear/FragmentIteBranching.lean</a>                                               |

| Role                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | File                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Controlled bit preparation for fragment ite —<br>Matching preparation: preparation bra of i is the<br>left unitor $1 \otimes n \rightarrow n$ ; Preparation bra of a sum of<br>the underlying completely positive map;<br>Then-branch uses outcome ...  <br>[QLambda/Linear/FragmentItePrep.lean] ( <a href="https://github.com/catskillsresearch/qlambda/blob/main/src/qlambda/Linear/FragmentItePrep.lean">https://github.com/catskillsresearch/qlambda/blob/main/src/qlambda/Linear/FragmentItePrep.lean</a> )                              | 0) is an isometry $\mathbb{C} \rightarrow \mathbb{C}^2$ ; The same<br>Born mass equals the Instrument<br>branch CP-map trace; Single-qubit<br>measurement of $K$ is 1-bounded<br>whenever $K$ is; ... (38 declarations)                                                                                                                                                                                                                                                                                                       |
| Measured register-history<br>simulation (F5-F6) --<br>Every $N$ supplies a measured<br>register-history simulation<br>package; Register-history<br>identification  <br>[QLambda/Linear/FragmentMeasuredSimulation.lean] ( <a href="https://github.com/catskillsresearch/qlambda/blob/main/src/qlambda/Linear/FragmentMeasuredSimulation.lean">https://github.com/catskillsresearch/qlambda/blob/main/src/qlambda/Linear/FragmentMeasuredSimulation.lean</a> )                                                                                  | [QLambda/Linear/FragmentRuntimeCore.lean] ( <a href="https://github.com/catskillsresearch/qlambda/blob/main/src/qlambda/Linear/FragmentRuntimeCore.lean">https://github.com/catskillsresearch/qlambda/blob/main/src/qlambda/Linear/FragmentRuntimeCore.lean</a> )                                                                                                                                                                                                                                                             |
| Route A fragment model  <br>[QLambda/Linear/FragmentModel.lean] ( <a href="https://github.com/catskillsresearch/qlambda/blob/main/src/qlambda/Linear/FragmentModel.lean">https://github.com/catskillsresearch/qlambda/blob/main/src/qlambda/Linear/FragmentModel.lean</a> )                                                                                                                                                                                                                                                                    | N-bounded fragment execution<br>(Track F) -- Measured-program<br>adequacy: closed measurement new 0<br>program under qubit-usage bound;<br>N-bounded observable adequacy for<br>closed substitution for classical<br>programs; Literal-only cor...                                                                                                                                                                                                                                                                            |
| N-qubit fragment denotation +<br>OpenQASM staging interface -- The<br>successful elaboration of the<br>quotation of the packaging equals<br>the circuit command of the<br>denotation; Successful elaboration<br>of the classical-quantum of...  <br>[QLambda/Linear/FragmentNDenotation.lean] ( <a href="https://github.com/catskillsresearch/qlambda/blob/main/src/qlambda/Linear/FragmentNDenotation.lean">https://github.com/catskillsresearch/qlambda/blob/main/src/qlambda/Linear/FragmentNDenotation.lean</a> )                          | [QLambda/Linear/FragmentRuntimeNDenotation.lean] ( <a href="https://github.com/catskillsresearch/qlambda/blob/main/src/qlambda/Linear/FragmentRuntimeNDenotation.lean">https://github.com/catskillsresearch/qlambda/blob/main/src/qlambda/Linear/FragmentRuntimeNDenotation.lean</a> )                                                                                                                                                                                                                                        |
| Physical bit copy/discard<br>boundary -- The classical copy<br>matrix is an isometry;<br>Computational-basis dephasing is<br>idempotent; The physical bit left<br>counit equals a dephase; ... (23<br>declarations)  <br>[QLambda/Linear/FragmentPhysicalBit.lean] ( <a href="https://github.com/catskillsresearch/qlambda/blob/main/src/qlambda/Linear/FragmentPhysicalBit.lean">https://github.com/catskillsresearch/qlambda/blob/main/src/qlambda/Linear/FragmentPhysicalBit.lean</a> )                                                     | [QLambda/Linear/FragmentSourceClassical.lean] ( <a href="https://github.com/catskillsresearch/qlambda/blob/main/src/qlambda/Linear/FragmentSourceClassical.lean">https://github.com/catskillsresearch/qlambda/blob/main/src/qlambda/Linear/FragmentSourceClassical.lean</a> )                                                                                                                                                                                                                                                 |
| Instances from fragment<br>physical bit  <br>[QLambda/Linear/FragmentPhysicalBitInstances.lean] ( <a href="https://github.com/catskillsresearch/qlambda/blob/main/src/qlambda/Linear/FragmentPhysicalBitInstances.lean">https://github.com/catskillsresearch/qlambda/blob/main/src/qlambda/Linear/FragmentPhysicalBitInstances.lean</a> )                                                                                                                                                                                                      | [QLambda/Linear/FragmentStepCongruence.lean] ( <a href="https://github.com/catskillsresearch/qlambda/blob/main/src/qlambda/Linear/FragmentStepCongruence.lean">https://github.com/catskillsresearch/qlambda/blob/main/src/qlambda/Linear/FragmentStepCongruence.lean</a> )                                                                                                                                                                                                                                                    |
| Extended quotation Hom $\Rightarrow$<br>classical-quantum meaning bridge<br>(measure / t / reset / seq /<br>branch) -- The circuit command of<br>the T gate of the denotation<br>equals a gate block; The circuit<br>command of the reset of the<br>denotat...  <br>[QLambda/Linear/FragmentQuoteBridgeExt.lean] ( <a href="https://github.com/catskillsresearch/qlambda/blob/main/src/qlambda/Linear/FragmentQuoteBridgeExt.lean">https://github.com/catskillsresearch/qlambda/blob/main/src/qlambda/Linear/FragmentQuoteBridgeExt.lean</a> ) | Fragment Step denotational<br>congruence -- Package:<br>denotational congruence for<br>fragment-admitted Step contexts<br>(app, ite, pair, unpair, measure);<br>Fragment of the one-step reduction<br>of the congruence of the<br>substitution...                                                                                                                                                                                                                                                                             |
| N-bounded fragment execution<br>(Track F) --<br>[QLambda/Linear/FragmentQuoteBridgeExt.lean] ( <a href="https://github.com/catskillsresearch/qlambda/blob/main/src/qlambda/Linear/FragmentQuoteBridgeExt.lean">https://github.com/catskillsresearch/qlambda/blob/main/src/qlambda/Linear/FragmentQuoteBridgeExt.lean</a> )                                                                                                                                                                                                                     | F4b: closed substitution $\beta$ on<br>denotational physical identities holds<br>The classical-bit counit is<br>physical discard after inclusion;<br>Discarding a computational-basis<br>preparation is the identity<br>channel; Classicalising then d...<br> <br>[QLambda/Linear/FragmentSubstBeta.lean] ( <a href="https://github.com/catskillsresearch/qlambda/blob/main/src/qlambda/Linear/FragmentSubstBeta.lean">https://github.com/catskillsresearch/qlambda/blob/main/src/qlambda/Linear/FragmentSubstBeta.lean</a> ) |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Closed first-order pair<br>split is<br>cocommutative; The closed context<br>split is coassociative; The Day<br>braiding on $1 \otimes 1$ is the identity; ...<br>(13 declarations)  <br>[QLambda/Linear/FragmentUnpairBeta.lean] ( <a href="https://github.com/catskillsresearch/qlambda/blob/main/src/qlambda/Linear/FragmentUnpairBeta.lean">https://github.com/catskillsresearch/qlambda/blob/main/src/qlambda/Linear/FragmentUnpairBeta.lean</a> )                                                                        |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Weighted N-bounded fragment<br>simulation -- Weighted<br>source/runtime simulation witness                                                                                                                                                                                                                                                                                                                                                                                                                                    |

**Total indexed:** 349 files, 56762 lines of Lean.