

Finite-Valuation Approximable Structures, Quantum λ -Calculus, and the Jung–Tix Problem: Semantics and Formal Verification in Lean 4

Lars Warren Ericson¹

¹Catskills Research Company

¹<https://github.com/catskillsresearch/qlambda>

¹lars.ericson@catskillsresearch.com

August 28, 2026

ORCID: 0000-0001-8299-9361

Primary Category: cs.LO (Logic in Computer Science)

Secondary Category: math.LO (Logic)

Abstract

0.1 Abstract

We develop a Lean~4 framework for denotational semantics of an untyped call-by-value λ -calculus with probabilistic ($\oplus_p$), internal ($\sqcap$), and external ($\sqbox$) choice, controlled by finite quantum instruments. The intended equation is not the classical Scott equation $D \cong [D \rightarrow D]$, nor an effectful collapse $Q \cong [Q \rightarrow Q]$. Values inhabit a domain D_∞ and terms denote computations in a quantum-effect layer $Q(D_\infty)$, linked by the call-by-value equation

$$D_\infty \cong [D_\infty \rightarrow Q(D_\infty)].$$

Here Q is a monad of computations: unit embeds a value as a trivial computation, and bind sequences an effectful computation with a value-to-computation continuation. Inspired by Chen, Kou, and Lyu’s finite-valuation approximable structures, we define $\omega\mathbf{QVA}$ by requiring approximate identities to factor through finite products of sub-normalized density-operator spaces under the Loewner order; finite spectrahedra are approximation factors, not themselves the power $Q(D)$. We prove a parameterized inverse-limit theorem and instantiate it with the fixed-register continuation power $\mathcal{Q}_n(D) = [[D \rightarrow R_n] \rightarrow R_n]$. Finite trace-nonincreasing completely positive (CP) instruments embed into this carrier by Scott-continuous token-local aggregation. The embedding preserves deterministic return exactly and agrees with finite map and bind on finitely presented continuations. Every rational token-theory (TT) test has an explicit Scott representation, so embedding order recovers finitary TT refinement; a directed-supremum obstruction rules out a finite-image Scott retract. On the language side, a hardware qubit Control–Environment–Kontinuation (CEK) machine and subnormalized channel-tree semantics yield final presented channel-tree completeness and token-adequacy capstones for the explicitly witnessed **ClosedStuckFreeCoverage** fragment. This includes restricted ordinary and recursive lambda applications with an external-choice argument; it is not unconditional completeness for every closed term.

1 Introduction and Background

The Scott–Strachey programme interprets untyped λ -calculus by solving a reflexive domain equation. Classically one solves $D \cong [D \rightarrow D]$: every value is a continuous function from values to values. That equation describes a pure, effect-free universe. Concurrent and nondeterministic computation needs more. Powerdomains (Plotkin, Smyth, Hoare) model internal nondeterminism ($\sqcap$) and external interactive choice ($\sqbox$). Probabilistic CSP (pCSP) and higher-order probabilistic programming quantify randomized branching by the subprobability valuation powerdomain $\mathcal{V}_{\leq 1}$, leading to equations of the form

$$D \cong [D \rightarrow \mathcal{P}(\mathcal{V}_{\leq 1}(D))].$$

Such equations require a category that is simultaneously Cartesian closed (for $[D \rightarrow \dots]$) and closed under $\mathcal{V}_{\leq 1}$. In 1998, Jung and Tix identified a persistent obstruction: standard Cartesian closed categories of continuous domains (bifinite, RB, FS) were not known to be preserved by $\mathcal{V}_{\leq 1}$. In August 2026, Chen, Kou, and Lyu resolved the Jung–Tix problem by introducing $\omega\mathbf{FVA}$ (finite-valuation approximable domains), the first full Cartesian closed subcategory of continuous domains closed under $\mathcal{V}_{\leq 1}$ and $\mathcal{V}_1$.

This paper takes the next step: from classical CSP/pCSP interpretations of $\oplus_p$, $\sqcap$, and $\sqbox$ on ordinary process or λ -terms, to a call-by-value interpretation of those same operators as higher-order classical control over a quantum computer. The three choice effects remain distinct classical control operations. They are realized, together with finite completely positive instruments, inside a quantum-effect domain $Q(D_\infty)$. Unitary evolution and measurement are not substitutes for $\oplus_p$, $\sqcap$, or $\sqbox$.

Call-by-value with effects forces a **value / computation** split. A **monad** Q packages that split: unit $D \rightarrow Q(D)$ wraps a value as a trivial computation, and bind $Q(D) \times (D \rightarrow Q(E)) \rightarrow Q(E)$ sequences a computation with a value-to-computation continuation. Untyped call-by-value abstraction then denotes a *value* of function space type $[D \rightarrow Q(D)]$ —given a value, return a computation—while every *term* denotes an element of $Q(D)$. The matching reflexive equation is therefore

$$D_\infty \cong [D_\infty \rightarrow Q(D_\infty)],$$

not $D \cong [D \rightarrow D]$ and not $Q \cong [Q \rightarrow Q]$.


The contrapositives matter. Solving only $D \cong [D \rightarrow D]$ while wanting instruments and choice leaves no place for effects. Solving $Q \cong [Q \rightarrow Q]$ would treat computations themselves as the untyped λ -universe (call-by-name / “everything is a thunk”), contradicting a Control–Environment–Kontinuation (CEK) machine that evaluates the function, evaluates the argument, and only then performs β -reduction, and contradicting how CP instruments act on values rather than on open computations. The claim of this development is the middle path: untyped call-by-value λ -calculus with choice and a quantum-effect monad Q , values solving $D_\infty \cong [D_\infty \rightarrow Q(D_\infty)]$, and terms denoting elements of $Q(D_\infty)$.

The formalized contribution lifts the finite-separation and saturation pattern from classical valuations to quantum spectrahedra ($\omega\mathbf{QVA}$), solves the parameterized equation above for a continuation power $Q = \mathcal{Q}_n$, and connects the denotation to a qubit CEK machine and channel-tree adequacy fragment. Chen–Kou–Lyu’s classical $\omega\mathbf{FVA}$ theorem and the Jung–Tix history are motivating literature, not a full Lean target of this repository. The Qiskit material below is likewise motivational operational comparison, not a verified compiler or formal equivalence theorem. The later sections state the formal claim and exact Lean boundary.

2 Syntactic Extension: Untyped λ -Calculus with Choice Operators

We extend the untyped λ -calculus with the three canonical choice operators from concurrent and probabilistic process calculi:

$$M, N ::= x \mid \lambda x.M \mid M N \mid M \oplus_p N \mid M \sqcap N \mid M \sqbox N$$

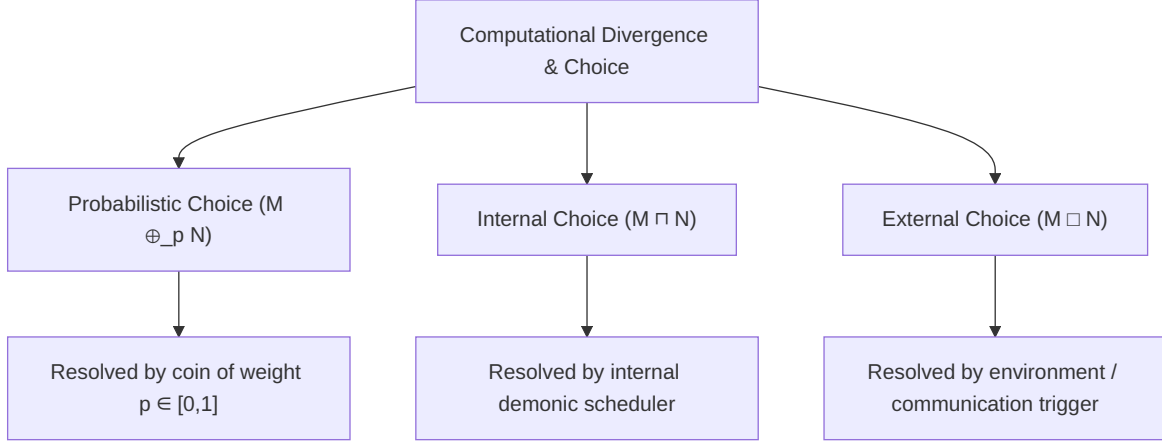

2.1 The Three Choice Operators

1. Probabilistic Choice ($M \oplus_p N$):

- **Behavior:** A coin weighted by $p \in [0,1]$ is flipped at reduction time; the term reduces to M with probability p and to N with probability $1 - p$.
- **Found in:** Probabilistic λ -calculus, Probabilistic PCF (Plotkin 1989, Jones 1990, Dal Lago, Ehrhard et al.).

2. Internal Nondeterministic Choice ($M \sqcap N$ or $M \oplus N$):

- **Behavior:** Unpredictable, unobservable scheduling or arbitrary choice between two functions/expressions.
- **Found in:** De'Liguoro–Piperno's non-deterministic λ -calculus, Boudol's concurrent λ -calculus.

3. External / Interactive Choice ($M \sqbox N$ or Guarded Selection):

- **Behavior:** Waiting for the environment (e.g., awaiting a message on a communication channel or waiting for an argument/input event).
- **Canonical functional equivalent:** The `select` construct in Concurrent ML (CML) or guarded alternative evaluation:

$$\text{sync}(\text{receive}(c_1) \Rightarrow \lambda x.M \sqbox \text{receive}(c_2) \Rightarrow \lambda y.N)$$

Classically, giving this calculus a denotational semantics (without quantum effects) means solving something like

$$D \cong [D \rightarrow \mathcal{P}(\mathcal{V}_{\leq 1}(D))],$$

where $[D \rightarrow \dots]$ models higher-order functions, $\mathcal{P}$ models internal choice ($\sqcap$), and $\mathcal{V}_{\leq 1}$ models probabilistic choice ($\oplus_p$). In this paper the ambient category is quantum ($\omega\mathbf{QVA}$), application is call-by-value, and effects live in a monad Q . The equation we solve is therefore the call-by-value form $D_\infty \cong [D_\infty \rightarrow Q(D_\infty)]$ of the previous section, with $\oplus_p$, $\sqcap$, and $\square$ interpreted as operations on $Q(D_\infty)$ alongside finite CP instruments—not by collapsing them into a pure domain equation $D \cong [D \rightarrow D]$ or into $Q \cong [Q \rightarrow Q]$.

3 Motivational Operational Comparison with Qiskit

The tables in this section motivate the denotational semantics by relating two operational presentations through a proposed shared CP denotation. They are not Lean theorems, a literal compiler specification, or a verified Qiskit correspondence. Each row depicts

$q\lambda$ construct $\longrightarrow$ CP channel or instrument $\longleftarrow$ Qiskit execution pattern.

For a fixed initial quantum state, the desired equivalence is observational: both sides have the same classical outcome probabilities and, conditioned on an outcome, the same post-measurement quantum state. The quantum forms below are intended primitives extending the classical control syntax of *Syntactic Extension*; they are not Church encodings. Church booleans remain useful classical data, but they are duplicable and therefore cannot stand for qubits. In particular, classical probabilistic choice $M \oplus_p N$ remains a control effect in Q , distinct from coherent superposition and from measurement instruments.

3.1 Table 1: Quantum primitives with a shared denotation

Concept	Intended $q\lambda$ operational form	Qiskit execution pattern	Shared CP denotation
Prepare $ 0\rangle$	$\text{new0}(q); M$	<code>qc.reset(q)</code> (or a fresh circuit qubit)	Preparation channel with output $ 0\rangle\langle 0 $
Pauli-X	$X(q); M$	<code>qc.x(q)</code>	$\rho \mapsto X\rho X^\dagger$
Prepare $ 1\rangle$	$\text{new0}(q); X(q); M$	fresh/reset <code>q</code> ; <code>qc.x(q)</code>	Preparation channel with output $ 1\rangle\langle 1 $
Hadamard	$H(q); M$	<code>qc.h(q)</code>	$\rho \mapsto H\rho H^\dagger$; on $ 0\rangle$ the output is coherent $ +\rangle$, not a probabilistic mixture
CNOT	$CX(q, r); M$	<code>qc.cx(q, r)</code>	$\rho \mapsto CX\rho CX^\dagger$
Measurement	measure q with $0 \Rightarrow M \mid 1 \Rightarrow N$	<code>qc.measure(q, c)</code> followed by <code>if_test</code> branches	Instrument $\Phi_i(\rho) = P_i\rho P_i$; probability $\text{Tr}(\Phi_i(\rho))$
Classical probabilistic choice	$M \oplus_p N$	host RNG, or an ancilla rotation followed by measurement and <code>if_test</code>	Branches $p \text{ id}$ and $(1-p) \text{ id}$ followed by the denotations of M, N

3.2 Table 2: Higher-order control and choice

Concept	$q\lambda$ operational role	Qiskit / host-language counterpart	Denotational correspondence
Variable	x is classical data or an opaque register handle	Python parameter, classical value, or register index	Environment lookup; a quantum register is threaded by the instrument semantics rather than copied as a Church value
Abstraction	$\lambda x.M$ packages higher-order classical control	circuit factory, closure, or parameterized subroutine	A value in $[D_\infty \rightarrow Q(D_\infty)]$: given a value, return a computation; not necessarily a unitary
Application	$M N$ invokes higher-order control (call-by-value)	call a factory/subroutine and compose its result	Evaluate function and argument as computations, then bind into the body (Kleisli/instrument composition)
Probabilistic choice	$M \oplus_p N$ resolves by a classical coin	host RNG or measured ancilla controlling dynamic branches	Convex combination of the two computation denotations in $Q(D_\infty)$
Internal choice	$M \sqcap N$ is selected by an unobservable scheduler	host/runtime scheduler chooses a branch	Nondeterministic join on computations; no fixed 50/50 probability is implied
External choice	$M \sqcap N$ waits for an environment-selected guard/event	runtime input, callback, or guarded <code>if_test</code>	Environment-indexed family of computations; not inherently a controlled unitary

Thus the “back-and-forth” is between operational realizations at matching semantic layers. Quantum gates and measurements meet as channels and instruments. Untyped λ abstraction and application meet Qiskit through the surrounding classical host language as circuit-producing higher-order control. Some terms require dynamic circuits or runtime interaction rather than one static circuit, but the common denotation still supplies the mental bijection used to guide the formal semantics.

4 Claimed domain equation, Lean dependency map, and status

4.1 Claimed and implemented domain equation

The equation claimed, parameterized, and mechanized is the call-by-value quantum-effect equation of the introduction:

$$D_\infty \in \omega\mathbf{QVA} \quad \text{and} \quad D_\infty \cong [D_\infty \rightarrow Q(D_\infty)].$$

4.1.1 What Q is

Q is the quantum computation / effect layer on values—not the value domain itself.

Role	Object	Meaning
Values	D_∞	Closures, payloads, what gets substituted
Computations	$Q(D_\infty)$	What a term denotes (effects, choice, instruments)
Function space	$[D_\infty \rightarrow Q(D_\infty)]$	A value that, given a value, returns a computation

A monad on values is specified by unit $D \rightarrow Q(D)$ (trivial computation) and bind $Q(D) \times (D \rightarrow Q(E)) \rightarrow Q(E)$ (sequence). Abstractly, Q is any locally continuous, $\omega\mathbf{QVA}$ -closed endofunctor of complete lattices equipped with that monadic structure (Lean: `IsQuantumPowerModel` / `IsQuantumMonad`).

Concrete instance. The fixed-register continuation power


$$Q(D) = \mathcal{Q}_n(D) = [[D \rightarrow R_n] \rightarrow R_n],$$

where R_n is the continuous lattice of finitary observation results for an n -dimensional register (Lean: `TTResult n` / `TTContinuation.model n`). Qubit hardware takes $n = 2$. Lean’s existence theorem is `omegaQVA_quantum_domain_equation_solved` in `QLambda/QuantumDomainEquation.lean`. In this presentation Q packages finite quantum instruments together with classical control effects as Scott-continuous maps on result continuations.

4.1.2 Contrapositives (what is not claimed)

- **Not** $D \cong [D \rightarrow D]$. That is the pure Scott equation; it has no computation monad and no place for instruments or choice as effects.
- **Not** $Q \cong [Q \rightarrow Q]$. That would make computations the untyped λ -universe (call-by-name / thunks), erase the unit/bind layer, and fight both CEK call-by-value evaluation and the fact that CP instruments act on values. Kleisli arrows for Q are maps $[D \rightarrow Q(D)]$, not $[Q(D) \rightarrow Q(D)]$.
- Abstractions denote elements of D_∞ (lifted by unit into $Q(D_\infty)$); applications denote elements of $Q(D_\infty)$ directly.

4.2 Main Lean module dependencies

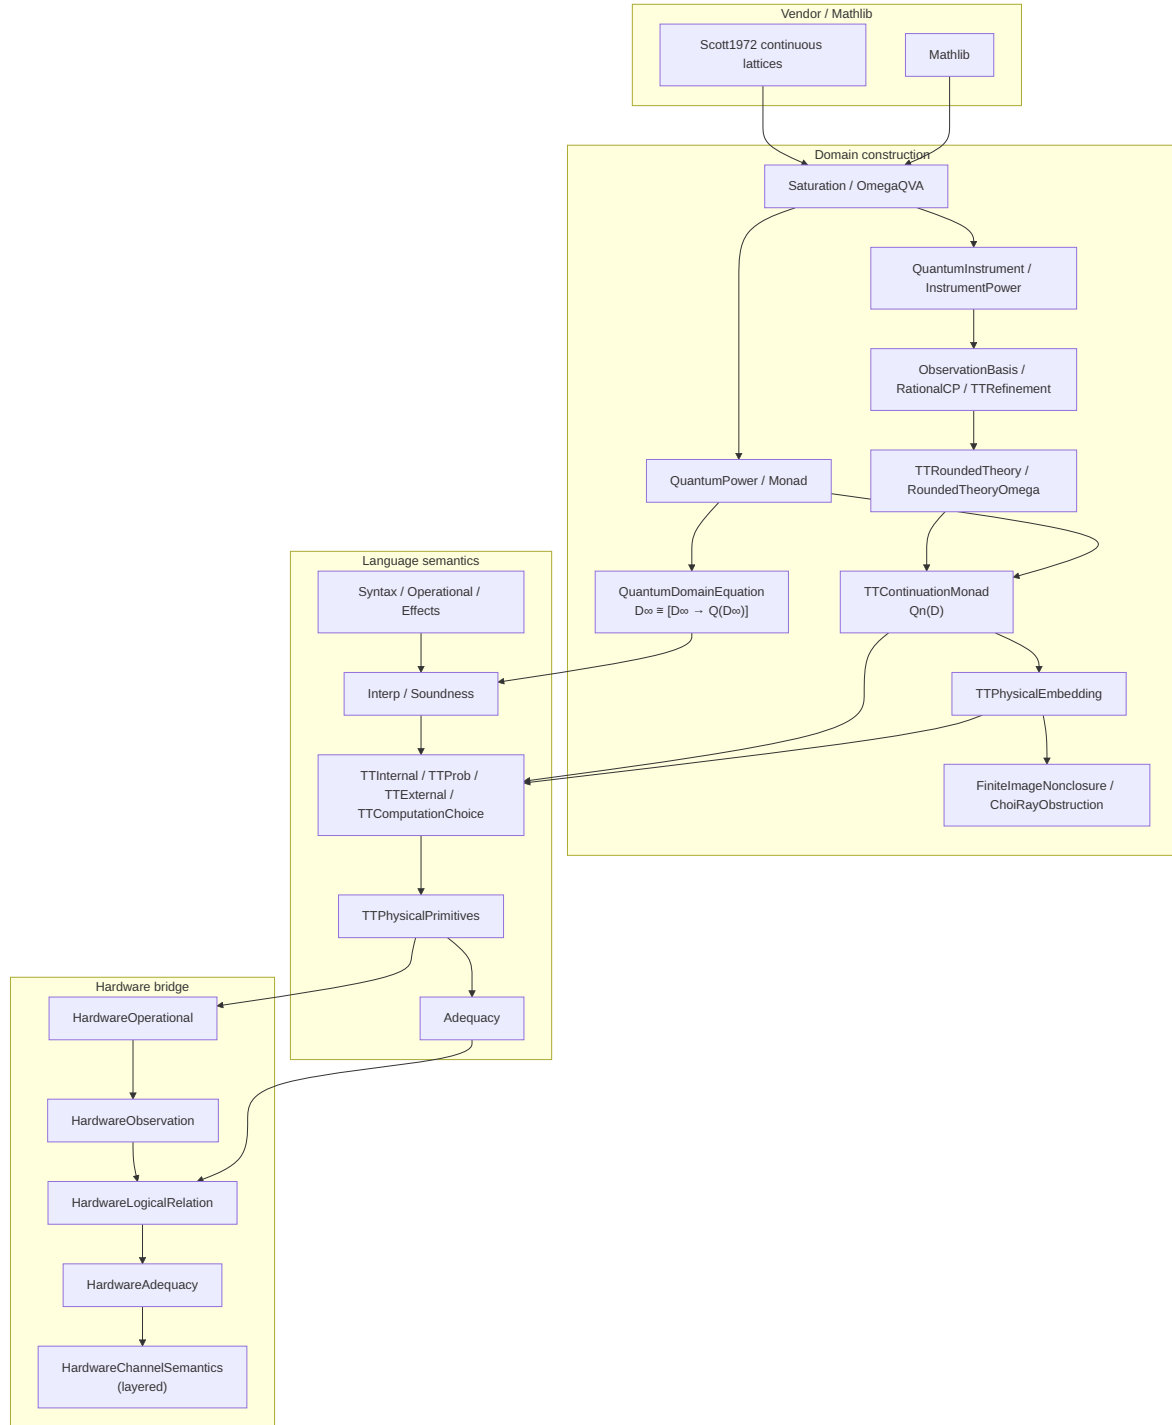

4.3 Hardware channel submodule dependencies

QLambda/HardwareChannelSemantics.lean is a barrel re-export. The proof DAG is linear:



Upstream of `Config: HardwareAdequacy` (which rests on `HardwareLogicalRelation`, `HardwareObservation`, `HardwareOperational`, and the `TT/adequacy` stack above).

Proved claims and exact boundaries are collected in *Claims formalized in Lean 4* below and indexed compactly in `THEOREMS.md`.


5 Classical Motivation: Recursive Domain Equations in $\omega\mathbf{FVA}$

This section summarizes the Chen–Kou–Lyu construction used as motivation. The classical $\omega\mathbf{FVA}$ development and its Jung–Tix theorem are not formalized here in full. The Lean contribution begins from independently mechanized finite-separation and saturation ingredients and proves the quantum $\omega\mathbf{QVA}$ results stated later.

The category $\omega\mathbf{FVA}$ consists of continuous domains D whose identity map is the directed supremum of an increasing sequence of maps factoring through subprobability valuation spaces over finite posets P_n :

$$D \xrightarrow{p_n} \mathcal{V}_{\leq 1}(P_n) \xrightarrow{e_n} D, \quad \sup_{n \in \mathbb{N}} (e_n \circ p_n) = \text{id}_D$$

The Smyth–Plotkin embedding-projection (e - p) method proceeds in five steps:

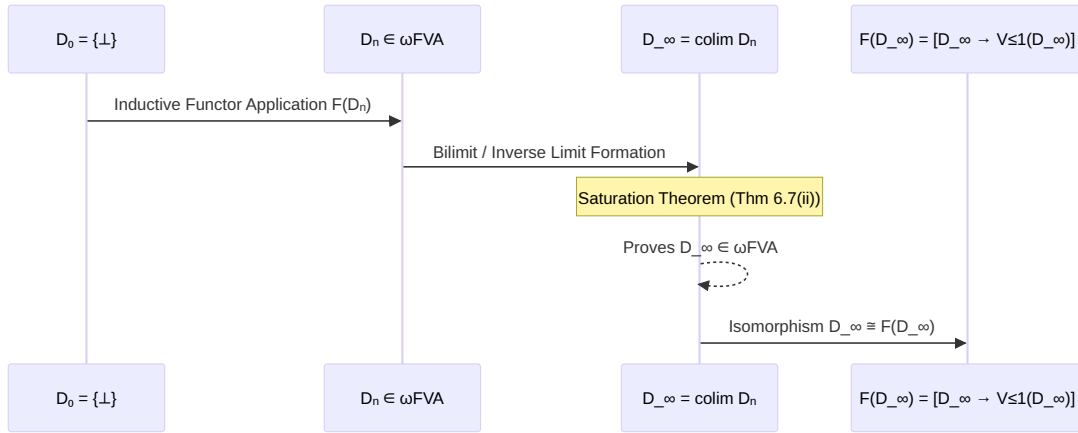

5.1 Step 1: Establish the Ambient Cartesian Closed Category ($\omega\mathbf{FVA}$)

By Theorem 10.4 of Chen–Kou–Lyu (2026): * **Initial / Pointed Object:** $\perp \in D$ exists for all $D \in \omega\mathbf{FVA}$, and the terminal domain $\mathbb{I} = \{\perp\} = \mathcal{V}_{\leq 1}(\emptyset)$ is in $\omega\mathbf{FVA}$. * **Cartesian Closure:** If $X, Y \in \omega\mathbf{FVA}$, then $[X \rightarrow Y] \in \omega\mathbf{FVA}$. * **Probabilistic Closure:** If $X \in \omega\mathbf{FVA}$, then $\mathcal{V}_{\leq 1}(X) \in \omega\mathbf{FVA}$ and $\mathcal{V}_1(X) \in \omega\mathbf{FVA}$.

Therefore, the mixed-variance endofunctor $F(X) = [X \rightarrow \mathcal{V}_{\leq 1}(X)]$ is well-defined internally on $\omega\mathbf{FVA}$.

5.2 Step 2: Build the Approximation Chain via Embedding-Projection Pairs

An embedding-projection pair (e, p) satisfies $p \circ e = \text{id}_X$ and $e \circ p \leq \text{id}_Y$. * **Base stage:** $D_0 = \{\perp\}$. * **Inductive stages:** $D_{n+1} = F(D_n) = [D_n \rightarrow \mathcal{V}_{\leq 1}(D_n)] \in \omega\mathbf{FVA}$. * **Lifting:**

$$e_{n+1} = F(e_n, p_n) = [p_n \rightarrow \mathcal{V}_{\leq 1}(e_n)] : D_{n+1} \rightarrow D_{n+2}$$

$$p_{n+1} = F(p_n, e_n) = [e_n \rightarrow \mathcal{V}_{\leq 1}(p_n)] : D_{n+2} \rightarrow D_{n+1}$$

yielding the expanding chain: $D_0 \rightrightarrows D_1 \rightrightarrows D_2 \rightrightarrows \dots \rightrightarrows D_n \rightrightarrows \dots$

5.3 Step 3: Take the Bilimit / Colimit D_∞

In **DCPO**, the bilimit is the standard inverse limit:

$$D_\infty = \left\{ (x_n)_{n \in \mathbb{N}} \in \prod_{n \in \mathbb{N}} D_n \mid \forall n, x_n = p_n(x_{n+1}) \right\}$$

equipped with canonical limiting pairs $(e_n^\infty : D_n \rightarrow D_\infty, p_n^\infty : D_\infty \rightarrow D_n)$ satisfying $p_n^\infty \circ e_n^\infty = \text{id}_{D_n}$, $e_n^\infty \circ p_n^\infty \leq e_{n+1}^\infty \circ p_{n+1}^\infty \leq \text{id}_{D_\infty}$, and $\sup_{n \in \mathbb{N}} (e_n^\infty \circ p_n^\infty) = \text{id}_{D_\infty}$.

5.4 Step 4: Proving $D_\infty \in \omega\mathbf{FVA}$ (The Saturation Theorem)

By Theorem 6.7(ii) (Unified Kernel-Lifting / Saturation Theorem): $>$ If D is a domain with an increasing sequence $a_n = e_n p_n \leq \text{id}_D$ such that $\sup_n a_n = \text{id}_D$ factoring through $B_n \in \omega\mathbf{FVA}$, then $D \in \omega\mathbf{FVA}$.

Setting $B_n = D_n \in \omega\mathbf{FVA}$ and $a_n = e_n^\infty \circ p_n^\infty$, Theorem 6.7(ii) guarantees $D_\infty \in \omega\mathbf{FVA}$.

5.5 Step 5: Establish the Isomorphism $D_\infty \cong [D_\infty \rightarrow \mathcal{V}_{\leq 1}(D_\infty)]$


Because F preserves directed suprema of embedding-projection pairs:

$$F(D_\infty) = F(\text{colim}_n D_n) \cong \text{colim}_n F(D_n) = \text{colim}_n D_{n+1} \cong D_\infty$$

Thus, $D_\infty \cong [D_\infty \rightarrow \mathcal{V}_{\leq 1}(D_\infty)]$ in $\omega\mathbf{FVA}$.

6 Comparison: $\omega\mathbf{FVA}$ vs. Equilogical Spaces (Equ)

In the late 1990s, semanticists recognized that continuous domains (**CONT**) failed Cartesian closure and that standard CCC subclasses were not closed under probabilistic valuations. This led to two historical pathways:

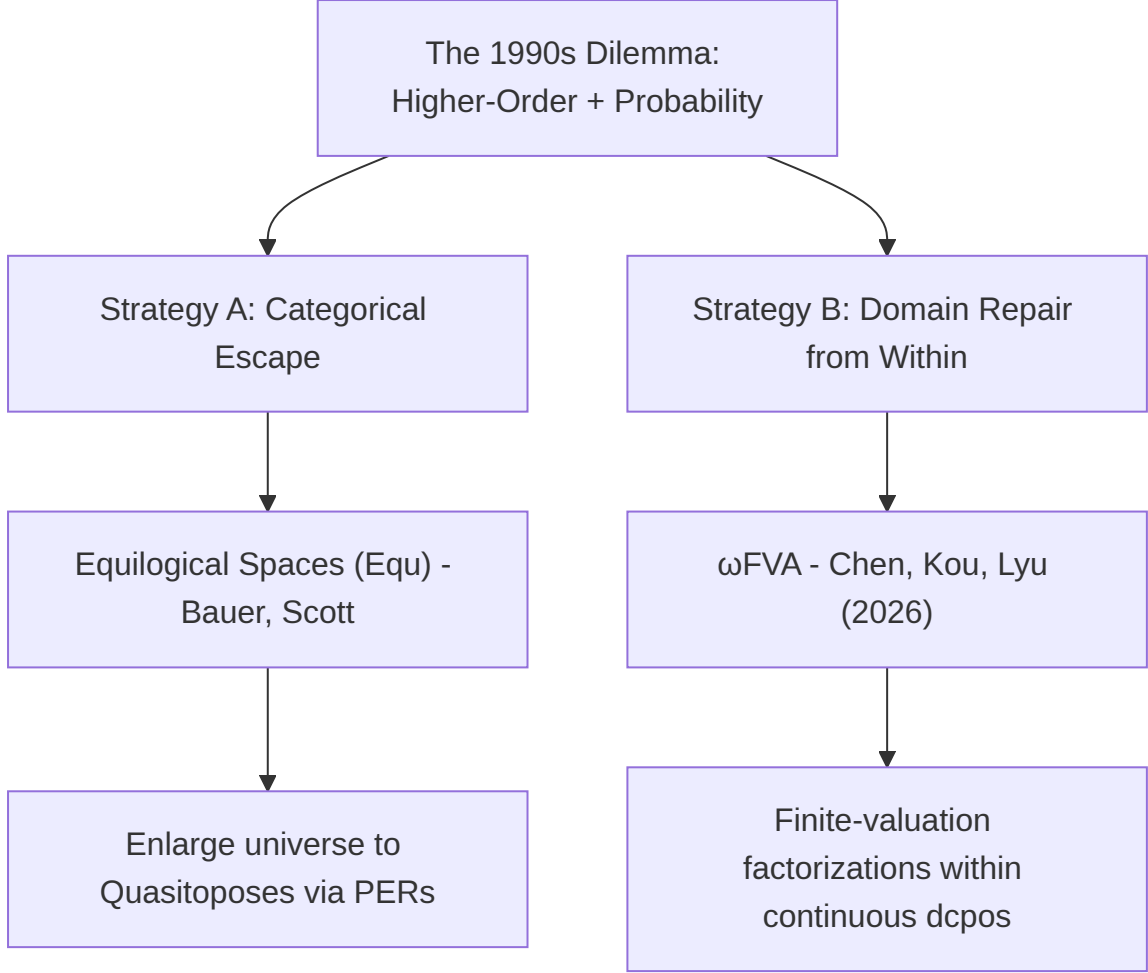

1. **Strategy A — Equilogical Spaces (Equ):** Formed by pairs $(X, \sim)$ of T_0 spaces with equivalence relations. **Equ** is a quasitopos (locally Cartesian closed, handles quotients and sheaves). The trade-off is losing concrete order-theoretic approximations and working with realizers.
2. **Strategy B — ω FVA:** Retains pure continuous dcpos with Scott topologies and the way-below relation ($\ll$). It resolves the obstruction by replacing finite-image deflations with finite-valuation factorizations $(D \rightarrow \mathcal{V}_{\leq 1}(P_n) \rightarrow D)$.
3. **Categorical Embedding:** Every countably based domain in ω FVA embeds fully and faithfully into **Equ** as $(D, =_D)$:

$$\omega\mathbf{FVA} \hookrightarrow \omega\mathbf{FS}_{\perp} \hookrightarrow \mathbf{Equ}$$

6.1 Comparison Table

Feature	Equilogical Spaces (Equ)	Finite-Valuation Domains (ω FVA)
Mathematical Nature	Topological spaces + Equivalence relations (Quasitopos)	Partially ordered sets (Continuous DCPOs / FS-domains)

Feature	Equilogical Spaces (Equ)	Finite-Valuation Domains ($\omega\mathbf{FVA}$)
Cartesian Closed?	Yes (by categorical design)	Yes (Theorem 10.4)
Probabilistic Monads?	Yes (via realizability/sheaves)	Yes ($\mathcal{V}_{\leq 1}, \mathcal{V}_1$ are internal functors)
Approximation Theory	Realizers / Moduli of continuity	Way-below relation ($\ll$) & finite posets P_n
Philosophical Role	Higher-order probability in topological/categorical logic	Higher-order probability in classical domain theory

7 The Quantum Extension: From Classical Probability to $\omega\mathbf{QVA}$


In quantum mechanics, unitary evolution creates coherent superposition, while measurement turns that coherence into a classical distribution of outcomes. For a computational-basis measurement,

$$\alpha|0\rangle + \beta|1\rangle \xrightarrow{\{\rho \mapsto P_i \rho P_i\}_{i=0,1}} \begin{cases} 0 & \text{with probability } |\alpha|^2, \\ 1 & \text{with probability } |\beta|^2. \end{cases}$$

The superposition before measurement is not the probabilistic term $M \oplus_p N$: the latter denotes classical randomized control. Internal scheduler choice $M \sqcap N$ and external guarded choice $M \square N$ are two further, independent effects. They do not occur as successive stages after measurement.


7.1 The No-Cloning Barrier and the LNL Architecture

Because the **No-Cloning Theorem** ($|\psi\rangle \not\rightarrow |\psi\rangle \otimes |\psi\rangle$) forbids diagonal copy maps $\Delta = \langle \text{id}, \text{id} \rangle$, pure quantum states cannot live directly in a Cartesian Closed Category. Instead, following Selinger and Valiron (2006/2009), we employ a **Linear-Nonlinear (LNL) / Monadic architecture**:

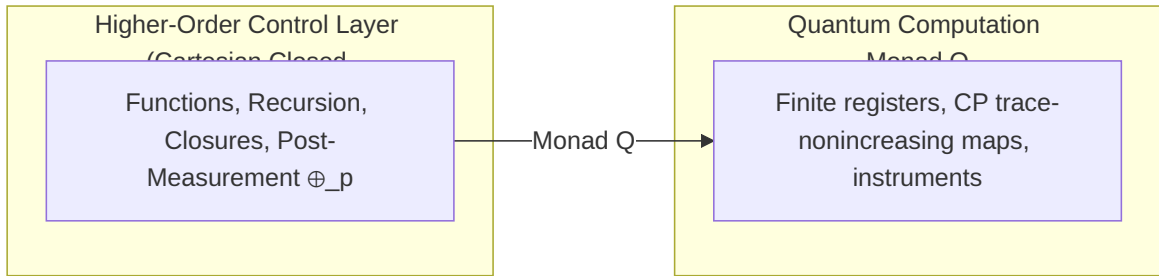

7.2 Generalizing to $\omega\mathbf{QVA}$

We generalize the Chen–Kou–Lyu construction from commutative probability simplices to non-commutative density operator spaces:

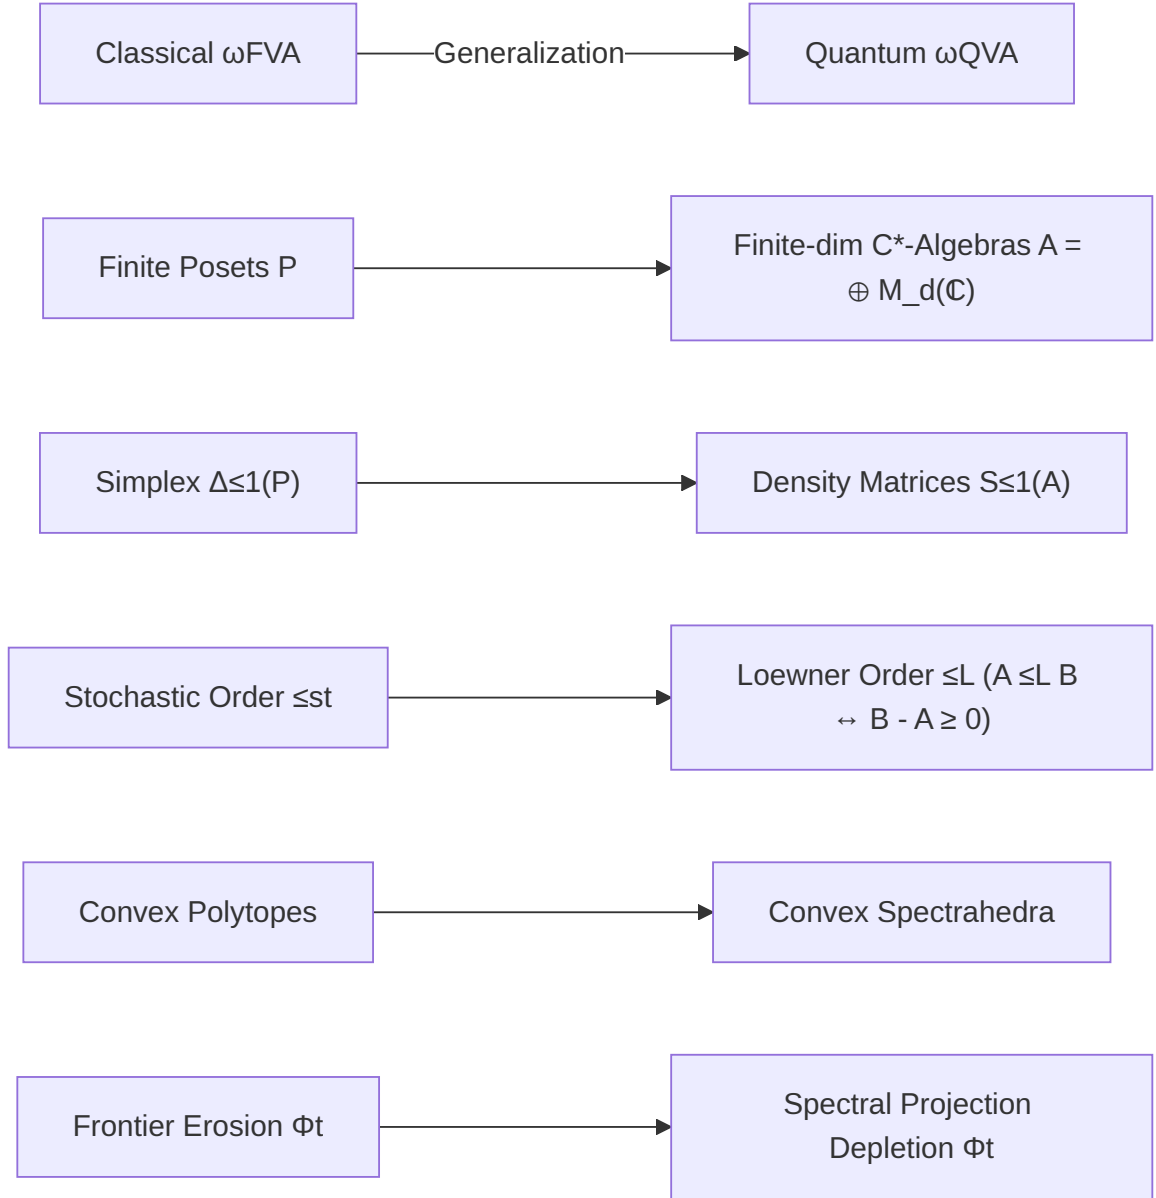

1. **Finite State Spaces:** Let $A = \bigoplus_{k=1}^m M_{d_k}(\mathbb{C})$. Its sub-normalized density operator space is $\mathcal{S}_{\leq 1}(A) = \{\rho \in A_+^* \mid \text{Tr}(\rho) \leq 1\}$ equipped with the Loewner partial order $\rho \leq_L \sigma \iff \sigma - \rho \geq 0$.
2. **Spectral Depletion Semigroup:** For $\rho = \sum \lambda_i E_i$, $\Phi_t(\rho)$ scales down maximal eigenspace projections, preserving the Loewner order ($\rho \leq_L \sigma \implies \Phi_t(\rho) \leq_L \Phi_t(\sigma)$) and establishing that $\mathcal{S}_{\leq 1}(A)$ is an FS-domain.
3. **Definition ($\omega\mathbf{QVA}$):** A domain D is in $\omega\mathbf{QVA}$ if $\text{id}_D = \sup_n a_n$ where each a_n factors through $\mathcal{S}_{\leq 1}(A_n)$ for finite-dimensional C^* -algebras A_n .
4. **Saturation:** The 2-level flattening lemma (Lemma 6.6) depends only on way-below interpolation ($\ll$) and finite separation, so the bilimit $D_\infty = \text{colim}_n D_n$ lies in $\omega\mathbf{QVA}$. The isomorphism $D_\infty \cong [D_\infty \rightarrow \mathcal{Q}(D_\infty)]$ additionally requires a locally continuous endofunctor $\mathcal{Q}$ on $\omega\mathbf{QVA}$.

7.3 The surviving roadmap

The development separates the construction of the semantic domain from the semantics of a language. The broad roadmap that survived formal proof is:

1. **Ambient domain theory — complete.** Define $\omega\mathbf{QVA}$, prove Cartesian closure, prove closure of countable rounded theories, and solve the parameterized inverse-limit equation.
2. **Concrete quantum effect — complete for a fixed register.** Construct the continuation power

$$\mathcal{Q}_n(D) = [[D \rightarrow R_n] \rightarrow R_n]$$

and prove the functor, local-continuity, $\omega\mathbf{QVA}$ -closure, and monad laws required by `IsQuantumPowerModel` and `IsQuantumMonad`.

3. **Finite physical fragment — complete with explicit boundaries.** Embed finite TNI CP instruments into $\mathcal{Q}_n(D)$; prove exact return and finitely presented map/bind compatibility; prove the represented-test direction of refinement correspondence; and replace the unsupported finite-retract claim by a directed-supremum obstruction theorem.
4. **Language semantics — hardware bridge and covered stuck-free capstone proved.** Terms with closed quantum primitives and recursive abstractions have a compositional Scott-continuous interpretation in $Q(D_\infty)$. A concrete qubit CEK machine carries normalized density states and classical closures and keeps internal, weighted, and external transitions distinct. A separate proof-only subnormalized channel-tree semantics retains all CP branches, including zero-mass branches, and folds them into physical instruments. Runtime logical relations, positive-run correspondence, recursive finite approximants, and token adequacy for each realized channel tree are proved. `ChannelTreeCompleteness` is proved for closed return, Pauli-X, measure-Z, compositional internal and external choice, and probabilistic endpoints; interior probability is complete at presented continuations by physical coin aggregation. Unique-successor identity CEK steps transfer completeness, and recursive denotations are Scott suprema of finite unfoldings. Presented channel-tree completeness and token adequacy are proved for the stacked-application fragments `Produces 0 / FunAppFrag`, for `ProductiveClosedCase`, and finally for every term carrying `ClosedStuckFreeCoverage`. `RestrictedExternApplication` covers `app (lam ...)` (`extern left right`) and its recursive-lambda analogue under explicit `NoApp`, `AdminNoApp`, and `Atomic` hypotheses. This consolidated boundary is sufficient, not an assertion for every closed term. The rank-one Choi-ray obstruction for `PhysicalBasisApproximant` is formalized for register dimension at least two.

The word “complete” in items 1–3 refers to the stated Lean interfaces and theorems, not to a complete quantum programming language.

7.4 Mini-roadmaps followed during domain construction

7.4.1 From finite CP maps to a countable result domain

The first route through Scott-open indicator observations failed to characterize weakest-precondition refinement. `QLambda/RefinementCounterexample.lean` exhibits a rational qubit counterexample over the four-element Boolean diamond: every cumulative Scott-open Choi observation refines, but a monotone Kraus-valued postcondition separates the instruments.

The replacement roadmap was:

1. restrict rational step-postcondition codes to trace-nonincreasing CP maps;

2. test weakest-precondition Choi matrices by finite conjunctions of strict Gaussian-rational quadratic inequalities;
3. identify finitary TT refinement with preservation of all such atoms and tokens;
4. saturate tokens under semantic entailment and strict strengthening;
5. prove the resulting rounded theory is a continuous lattice and an ω QVA.

Strict inequalities are essential: they provide rational interpolation and allow a finite observation at a directed supremum to be witnessed at a finite stage.

7.4.2 From exact pullback to rational local approximation

Exact pullback of a rational Choi test through an arbitrary Kraus family need not remain rational. The successful route therefore used local approximation rather than exact syntactic closure:

1. normalize a PUnit-valued finite computation to its total TNI Kraus map;
2. prove uniform bounds for pulled-back Choi functionals on the compact TNI region;
3. approximate each strict functional test by a finite rational quadratic neighbourhood;
4. lift atomwise approximation to finite tokens;
5. use token derivations to extend finite physical operations Scott-continuously to all rounded result theories.

This is implemented across `QLambda/TTResultAlgebra.lean`, `QLambda/TTResultApproximation.lean`, and `QLambda/TTResultOperations.lean`.

7.4.3 From a failed compactness shortcut to token-local aggregation

An attempted shortcut treated an entire finitely satisfied result theory as compact. That statement is false in general: a finite instrument can satisfy infinitely many increasingly precise rational observations. The corrected proof works one output token at a time. A bind observation yields finitely many branch-local source tokens; directedness supplies one common continuation stage because the instrument has finitely many outcomes. `AggregateDerives`, `aggregateResult`, `aggregateResult_sSup`, and `bindResultScott` then give the required Scott-continuous aggregation without whole-theory compactness.

7.4.4 From an intended order equivalence and retract to the valid boundary

The continuation carrier contains arbitrary Scott-continuous higher-order maps, while the embedding only produces finite-instrument aggregators. Consequently, neither a global order equivalence nor a finite-image retract follows merely from operational agreement on finite presentations.

The proved boundary is explicit:

1. every source rational TT test is represented by a Scott result postcondition and a finite result continuation;
2. consequently, embedding order unconditionally implies `FinitaryTTRefines` for every output code;

3. any Scott projection fixing and landing in the finite image forces that image to be closed under every nonempty directed supremum;
4. therefore any concrete directed family of finite embeddings with a non-finite supremum rules out such a retraction.

The development constructs both the rational coded-test representation and a concrete one-dimensional dyadic-prefix chain of finite embeddings. The chain is directed, while its supremum is separated from every finite embedding by rational coordinate tests. Thus the finite physical image is not closed under directed suprema and admits no Scott-continuous retraction.

7.5 Definitions produced by the construction

- `RatTNICPMatrix n` is a Gaussian-rational Choi matrix with positivity and trace-nonincreasing certificates.
- `FiniteInstrumentComp n D` is a finite family of TNI CP branches returning values in `D`.
- `FinitaryTTRefines C` quantifies weakest-precondition refinement over rational finite-step postconditions.
- `TTTokenTheory n C` is the saturated rounded completion of finite strict TT tokens.
- `TTResult n` is the fixed result theory at output type `PUnit`.
- `TTContinuationPower n D` is `ScottMap (ScottMap D (TTResult n)) (TTResult n)`.
- `TTPhysicalEmbedding.embed` is the Scott-continuous aggregation transformer induced by the finite instrument .
- `CodedTestRepresentation C c` packages the Scott representation needed to recover a source test `c` from a result continuation.
- `FiniteImageScottRetraction n D` states precisely what a Scott-continuous projection onto the finite embedded image would require.
- `Term Prim` is the untyped source syntax with parameterized closed primitives and recursive function values.
- `SemanticValue Q D0 j0` is the solved domain D_∞ , while `SemanticComp Q D0 j0` is the single term codomain $Q(D_\infty)$.
- `interp primitive M` is a Scott map from environments to $Q(D_\infty)$; `HasComputationChoice` supplies the three still-model-dependent choice operations.
- `RestrictedExternApplication code` records the two proved lambda / recursive-lambda applications with an external-choice argument and their exact syntactic side conditions.
- `ProductiveClosedCase code` joins the path-productive cases with `RestrictedExternApplication`.
- `ClosedStuckFreeCoverage realize code` is the final named sufficient coverage boundary for closed presented channel-tree completeness.

7.6 Principal theorems and proof ideas

Finitary refinement. `finitaryTTRefines_iff_atom_holds` and `finitaryTTRefines_iff_token_holds` reduce matrix refinement to strict rational quadratic separation. `satisfiedTTTheory_le_iff_finitaryTTRefines` then identifies theory inclusion with the finitary preorder. The forward direction uses Choi monotonicity; the reverse direction separates a failed Loewner inequality by a rational quadratic witness.

Rounded completion and ω QVA. `ttTokenTheory_isContinuousLattice` follows from rounded ideal completion. `RoundedTheory.isOmegaQVA` uses finite-prefix membership gates, each factoring through finite products of one-dimensional sub-normalized density spaces, to approximate the identity.

Concrete continuation model. `TTContinuation.model n` satisfies `IsQuantumPowerModel`; the same carrier satisfies `IsQuantumMonad`. Evaluation and precomposition are Scott-continuous, and pointwise directed suprema prove local continuity. Therefore the parameterized theorem `omegaQVA_quantum_domain_equation_solved` applies and yields

$$D_\infty \cong [D_\infty \rightarrow \mathcal{Q}_n(D_\infty)].$$

Physical embedding. `bindResultScott_satisfied` proves that on a continuation represented by finite result instruments,

$$\text{embed}(\mu)(k) = (\mu \text{ bind } \nu). \text{satisfiedTTTheory}.$$

The proof extracts finitely many branch-local source tokens and extends their semantic derivation to the rounded completion.

Finite monad compatibility. `embed_unit` is exact as an equality of Scott maps. `embed_bind_unit` and `embed_unit_bind` inherit the continuation monad unit laws. `embed_map_satisfied` and `embed_bind_satisfied` prove map and Kleisli compatibility on finitely presented result continuations, where physical finite bind has an exact meaning.

Order boundary. `finitaryTTRefines_test_of_embed_le` and `finitaryTTRefines_of_embed_le` recover represented rational tests from embedding order. Their proofs evaluate the pointwise Scott-map inequality at the representing continuation and use `satisfiedTTTheory_le_iff_finitaryTTRefines`.

Retract boundary. `finiteImage_directedSupClosed_of_retraction` applies preservation of directed suprema by the proposed Scott projection and its fixed-point law. `range_embed_dyadicStage_directed_nonclosed` supplies a concrete non-closure witness, and `no_finiteImageScottRetraction_dyadic` derives the unconditional contradiction.

Computation-valued interpretation. `interp_continuous` records that every term clause is Scott-continuous in its environment by construction. `interp_value` proves that ordinary and recursive abstractions are precisely the pure cases lifted through monadic unit. `recLambdaValue_unfold` is Scott's fixed-point equation for recursive functions. `applyComp_pure_lambda` combines both monad unit laws with the $D_\infty \cong [D_\infty \rightarrow Q(D_\infty)]$ inverse equations to prove semantic β -reduction for a pure abstraction and argument.

Covered stuck-free capstone. `closed_term_presented_channelTreeCompleteness_of_productive_case` handles `ProductiveClosedCase`, including the restricted extern-as-argument forms. `closed_stuck_free_presented_channelTreeCompleteness` then dispatches every constructor of `ClosedStuckFreeCoverage`; only its `productiveCase` route requires `MeasureDistinct`, while `restrictedExtern` uses the direct theorem. `closed_stuck_free_presented_token_adequacy` composes that result with presented channel-tree token adequacy. The theorem remains explicitly about represented continuations and realized finite trees.

7.7 Examples and separating cases

1. **Deterministic return.** A one-outcome identity instrument returning `d` embeds exactly as continuation evaluation at `d`: `embed (unit d) = TTContinuation.unit d`.

2. **Finite sequential composition.** When `k e` is the satisfied result theory of a finite continuation at each returned value, evaluating `embed` at `k` equals the satisfied theory of physical instrument `bind`. The map and bind compatibility theorems are obtained by weakest-precondition semantic equivalence.
3. **Why indicator observations are insufficient.** The Boolean-diamond qubit example proves `ObservationRefines` while `Refines` fails. Rational CP-valued step postconditions retain the missing value-dependent quantum information.
4. **Why finite presentations are not assumed compact.** Increasing rational thresholds can approximate a boundary observation indefinitely; token-local witnesses, not a single compact satisfied theory, establish Scott continuity.
5. **One codomain for terms.** A variable does not denote a bare element of D_∞ while an application denotes a computation. Both denote elements of $Q(D_\infty)$; the variable is the special case `unit (x)`. Likewise, an abstraction is folded into D_∞ and then lifted by `unit`.
6. **Recursive function.** The denotation of `recLam self arg body` is the least fixed point of the Scott-continuous self-functional obtained by updating the environment first at `self`, then at `arg`, interpreting `body`, and folding the resulting function back into D_∞ . `recLambdaValue_unfold` proves that this value equals one unfolding of that functional.

7.8 Abstract specification and solved domain equation

The finite spectrahedron $\mathcal{S}_{\leq 1}(A)$ is an approximation factor in $\omega\mathbf{QVA}$, not the computation type $\mathcal{Q}(D)$. A quantum power model is instead an assignment Q such that:

1. $Q(D)$ is a complete lattice whenever D is;
2. Q is functorial on Scott maps;
3. Q is order-enriched and locally continuous on monotone $\mathbb{N}$ -families;
4. $D \in \omega\mathbf{QVA}$ implies $Q(D) \in \omega\mathbf{QVA}$.

Let $D_0 \in \omega\mathbf{QVA}$ and let $j_0 : [D_0 \rightarrow Q(D_0)] \rightarrow D_0$ be a continuous-lattice projection. For the inverse limit of $D_{m+1} = [D_m \rightarrow Q(D_m)]$, `omegaQVA_quantum_domain_equation_solved` proves

$$D_\infty \in \omega\mathbf{QVA} \quad \text{and} \quad D_\infty \cong [D_\infty \rightarrow Q(D_\infty)].$$

The mixed tower maps and inverse identities are proved from the specification and instantiate with `TTContinuation.model n`.

7.9 Roadmap from the domain to a complete language semantics

The domain construction supplies the space in which a fixed-register untyped quantum language can be interpreted. A complete semantics still requires the following layers, in this order:

1. **Computation-valued term interpretation — complete for the stated core.** `interp` is compositional and Scott-continuous; renaming, weakening, capture-avoiding value substitution, β , and recursive β are proved.
2. **Operational semantics — hardware core complete.** The CEK machine carries a normalized qubit density matrix, closures, environments, and a continuation stack. Kraus transitions satisfy exact Born normalization and trace bounds.

3. **Probabilistic, internal, and external choice — concrete and separated.** Probability uses physical weighted aggregation, internal choice uses join, and external choice uses explicit branch tags and selectors.
4. **Adequacy — proved at the named covered stuck-free boundary.** Normalized hardware runs model executable positive outcomes; subnormalized channel trees retain every CP branch and fold into finite TNI instruments with exact TT token characterizations. A formal basis-state counterexample rules out reconstructing a state-independent channel from one arbitrary normalized run. Scott recursion is the supremum of finite unfoldings. `ChannelTreeCompleteness` is proved for closed return, Pauli-X, measure-Z, compositional internal and external choice, and probabilistic endpoints; interior probability is complete at presented continuations. Application, argument evaluation, and beta steps transfer completeness by unique-successor identity wrapping. The inductive fragments `FunAppFrag` and `Produces n` give presented completeness for nested lambda / recursive-lambda applications under matching leftover argument frames. `HardwareChannel/Fundamental.lean` assembles path transfer lemmas into `PathChannelEvaluation / related_pathChannelTreeTokenAdequacy`. `HardwareChannel/Productive.lean` adds `ProductiveClosedCase` and direct completeness for the restricted extern-as-argument forms. `HardwareChannel/Coverage.lean` proves the final `closed_stuck_free_presented_channelTreeCompleteness` and token theorem for `ClosedStuckFreeCoverage`. Stuck app (ret) _ states remain excluded (`stuck_payload_under_function_no_internal_step`). A separate rank-one Choi-ray obstruction shows why finitely generated physical-basis approximants cannot interpolate every ray when the register dimension is at least two.

8 Formal Verification in Lean 4 & Capstone Theorem

The formalization is constructed in Lean 4 on top of the `Scott1972` continuous lattice library (<https://github.com/catskillsresearch/scott1972>). Chen–Kou–Lyu-style finite-separation and saturation lemmas are mechanized in `QLambda/Saturation.lean`, and `omegaQVA_closed_under_functionSpace` proves Cartesian closure by finite-separator step-map sampling. `QLambda/QuantumInstrument.lean` develops finite Kraus instruments and proves residual CP refinement equivalent to Choi order. `QLambda/RefinementCounterexample.lean` proves indicator observations too weak for TT refinement. `QLambda/RationalCP.lean`, `QLambda/TTObservationBasis.lean`, and `QLambda/TTRefinement.lean` replace them by countable physical finitary CP-valued post-conditions and prove exact satisfied-theory order correspondence. `QLambda/TTRoundedTheory.lean` forms their saturated continuous completion. `QLambda/RoundedTheoryOmega.lean` proves generically that every encodable rounded basis is an $\omega\mathbf{QVA}$ by explicit one-dimensional density factorizations. `QLambda/TTResultAlgebra.lean`, `QLambda/TTResultApproximation.lean`, and `QLambda/TTResultOperations.lean` establish TNI result normalization, rational local approximation, and Scott-continuous token-local aggregation. `QLambda/TTContinuationMonad.lean` defines $\mathcal{Q}_n(D) = [[D \rightarrow R_n] \rightarrow R_n]$, proves every `IsQuantumPowerModel` and `IsQuantumMonad` field, and bundles `TTContinuation.model n`. `QLambda/TTPhysicalEmbedding.lean` embeds finite physical instruments, proves finite monad compatibility on the precisely stated fragment, proves represented-test refinement recovery, and formalizes the directed-supremum obstruction to a finite-image Scott retract.

Language and hardware layers continue from that domain. `QLambda/Interp.lean` and `QLambda/Soundness.lean` give computation-valued interpretation and operational soundness. Choice algebras live in `TTInternalChoice`, `TTProbChoice`, `TTEsternalChoice`, and `TTComputationChoice`. The hardware CEK machine and observation/logical-relation stack occupy `HardwareOperational` through `HardwareAdequacy`. Channel-tree completeness is developed in the layered import DAG

QLambda/HardwareChannel/{Config,Identity,Spines,UnderFrame,FunApp,Closed,Fundamental,Product} re-exported by HardwareChannelSemantics.lean. The compared capstone domain theorem is:

Lean 4 source

```
class IsQuantumPowerModel (Q : (D : Type u) -> [CompleteLattice D] -> Type u) where
  str : forall D [CompleteLattice D], CompleteLattice (Q D)
  map : forall {D E} [CompleteLattice D] [CompleteLattice E], ScottMap D E -> ScottMap (Q D)
    (Q E)
  map_id : ...
  map_comp : ...
  map_mono : ...
  map_iSup : ...
  closed : forall {D} [CompleteLattice D], IsOmegaQVA D -> IsOmegaQVA (Q D)

theorem omegaQVA_quantum_domain_equation_solved
  (M : QuantumPowerModel) (D_0 : QDomain.{u})
  (j_0 : IsContinuousLatticeProjection D_0.carrier (QuantumFunctor M D_0.carrier)) :
  Nonempty (IsOmegaQVA (QDInf M D_0 j_0)) /\
  ... /\
  Nonempty (QDInf M D_0 j_0 ?o ScottMap (QDInf M D_0 j_0) (QuantumPower M (QDInf M D_0 j_0)))

structure QuantumOperation (n m : Nat) where
  kraus : List (Matrix (Fin m) (Fin n) ?)
  trace_nonincreasing : ...

structure QuantumInstrument (n m outcomes : Nat) where
  branch : Fin outcomes -> List (Matrix (Fin m) (Fin n) ?)
  trace_nonincreasing : ...

structure FiniteInstrumentComp (n : Nat) (D : Type*) where
  Outcome : Type
  [outcomeFintype : Fintype Outcome]
  branch : Outcome -> List (Matrix (Fin n) (Fin n) ?)
  value : Outcome -> D
  trace_nonincreasing : ...

noncomputable def TTPhysicalEmbedding.embed
  (? : FiniteInstrumentComp n D) :
  TTContinuationPower n D :=
  TTTTokenTheory.bindResultScott ?

theorem TTPhysicalEmbedding.embed_unit (d : D) :
  embed (FiniteInstrumentComp.unit (n := n) d) =
  TTContinuation.unit (n := n) d
```

8.1 What the Lean development currently proves (checklist)

1. **Domain.** $D_\infty \in \omega\mathbf{QVA}$ and $D_\infty \cong [D_\infty \rightarrow Q(D_\infty)]$ for every quantum power model Q , instantiated at $\mathcal{Q}_n$.
2. **Physical fragment.** Exact `embed_unit`; map/bind agreement on finitely presented continuations; every rational TT test has a Scott representation; embedding order recovers `FinitaryTTRefines`; no Scott retract onto the finite embedded image.
3. **Interpretation.** Compositional Scott-continuous `interp` into $Q(D_\infty)$; ordinary and recursive β ; recursive denotations as Scott fixed points / finite-iterate suprema.
4. **Choice.** Internal join, physical weighted probability (not lattice join), and tagged external selection are separated and registered as lawful effect instances.

5. **Hardware adequacy infrastructure.** Normalized CEK machine; subnormalized channel trees; logical relations; token adequacy for realized trees; completeness transfer across unique-successor identity steps.
6. **Covered stuck-free channel-tree capstone.** `FunAppFrag` / `Produces` `n` under residual frames; `PathChannelEvaluation` and the closed bridges in `HardwareChannel/Fundamental.lean`; `ProductiveClosedCase` and `RestrictedExternApplication` in `HardwareChannel/Productive.lean`; and the consolidated `ClosedStuckFreeCoverage`, `closed_stuck_free_presented_channelTreeCompleteness` and `closed_stuck_free_presented_token_adequacy` in `HardwareChannel/Coverage.lean`.

A compact status table and the open-hole list appear in the next section.

9 Claims formalized in Lean 4

9.1 What is proved in Lean (summary)

Layer	Status	Principal Lean anchors
ω QVA , Cartesian closure, saturation	Done	<code>OmegaQVA</code> , <code>Saturation</code>
Parameterized equation $D_\infty \cong [D_\infty \rightarrow Q(D_\infty)]$	Done	<code>omegaQVA_quantum_domain_equation_solved</code>
Concrete Q_n , monad laws	Done	<code>TTContinuation.model</code> , <code>IsQuantumMonad</code>
Finite TNI embedding, presented map/bind, retract obstruction	Done	<code>TTPhysicalEmbedding</code> , <code>FiniteImageNonclosure</code>
Untyped syntax, <code>interp</code> in $Q(D_\infty)$, β / <code>rec-β</code>	Done	<code>Interp</code> , <code>Soundness</code>
<code>Prob</code> / <code>intern</code> / <code>extern</code> choice algebras	Done	<code>TTProbChoice</code> , <code>TTInternalChoice</code> , <code>TTEsternalChoice</code>
Hardware CEK + channel trees + token adequacy infrastructure	Done	<code>HardwareOperational ...</code> <code>HardwareAdequacy</code>
Channel-tree completeness: <code>ret</code> , <code>Pauli-X</code> , <code>measure-Z</code> , <code>choice</code> , identity CEK steps	Done	<code>HardwareChannel/Config</code> , <code>Identity</code>
Presented completeness for <code>Produces</code> / <code>FunAppFrag</code> (incl. <code>app_lam</code> , <code>app_recLam</code> , <code>FunAppFrag</code> leftover args)	Done (fragment)	<code>Spines</code> , <code>FunApp</code> , <code>Closed</code>
Path-indexed fundamental theorem (<code>PathChannelEvaluation</code>)	Done	<code>HardwareChannel/Fundamental</code>

Layer	Status	Principal Lean anchors
Closed-term presented completeness (NoApp; or any closed term with a branch-complete PathChannelEvaluation)	Done	closed_term_presented_*, closed_term_presented_*_of_noApp
Automatic PathChannelEvaluation for Productive 0 (leftover-arity spines, intern-in-body, measure-Z / probability args), nested app as an argument, and closed extern	Done	HardwareChannel/Productive, closed_term_presented_*_of_productive
Restricted extern arguments under ordinary / recursive lambda, with explicit syntax hypotheses	Done (fragment)	RestrictedExternApplication, ProductiveClosedCase
Consolidated presented completeness and token adequacy for covered closed stuck-free programs	Done (exact boundary)	ClosedStuckFreeCoverage, closed_stuck_free_presented_channelTreeCompleteness, closed_stuck_free_presented_token_adequacy
Stuck app (ret) _ / payload-under-function completeness for arbitrary realize	Excluded	stuck_payload_under_function_no_internal_step

9.2 Currently open holes

The following are **not** claimed as proved.

1. **Coverage is sufficient, not exhaustive.** ClosedStuckFreeCoverage packages every presently proved closed route, including RestrictedExternApplication, but is not a decision procedure or a completeness classification for all non-stuck closed programs.
2. **Restricted extern is exact.** The proved direct forms are app (lam x body) (extern left right) and app (recLam self x body) (extern left right) under their NoApp, AdminNoApp, and Atomic hypotheses. No claim is made for arbitrary placement or nesting of external choice under residual frames.
3. **Stuck applications.** Stuck app (ret c) M reaches a value under a payload function frame (stuck_payload_under_function_no_internal_step). For a general realize, presented completeness need not hold there, so unrestricted “every closed term” completeness is false.
4. **Interior probability at arbitrary continuations.** For $0 < p < 1$, completeness is at **finitely presented** continuations (PresentedChannelTreeCompleteness). Full ChannelTreeCompleteness at arbitrary Scott continuations would need Scott density of presented continuations (or an equivalent approximation argument).
5. **Stronger physical / domain claims not pursued.** A finite-image Scott retract onto embedded instruments is **refuted**, not missing. Raw InstrumentPower as an ω QVA

carrier is not claimed; the Choi-ray obstruction rules out a particular physical-basis approximant scheme for $n \geq 2$, not the continuation-power construction in use.

`arxiv.md` is the narrative status of record; `THEOREMS.md` is the compact name/file/boundary index.

10 Acknowledgments & Provenance

- **Software & AI Tooling:** The formalization was mechanized using **Lean 4** and **Mathlib**. The author utilized the **Cursor** development environment, **Grok 4.6 High Fast**, **Gemini 3.7 Flash**, and **GPT-5.6 Sol Medium** as assistive tools for code scaffolding, proof exploration, semantic review, redesign planning, and document drafting.
- **Integrity Statement:** All formal definitions, proofs, and synthesized results were verified under the Lean 4 compiler. Authors retain full and exclusive responsibility for the mathematical correctness of the mechanized proofs and the contents of this manuscript.

11 References

1. S. Abramsky and B. Coecke. *A categorical semantics of quantum protocols*. In *Proceedings of the 19th Annual IEEE Symposium on Logic in Computer Science (LICS)*, pages 415–425, 2004.
2. P. N. Benton. *A mixed linear and non-linear logic: Proofs, terms and models*. In *Computer Science Logic (CSL)*, LNCS 933, pages 121–135. Springer, 1995.
3. Y. Chen, H. Kou, and Z. Lyu. *Finite-valuation approximable structures: a solution to the Jung–Tix problem of probabilistic powerdomains*. arXiv:2608.03073, 2026.
4. G. Gierz, K. H. Hofmann, K. Keimel, J. D. Lawson, M. Mislove, and D. S. Scott. *Continuous Lattices and Domains*. Cambridge University Press, Cambridge, 2003.
5. C. Jones and G. D. Plotkin. *A probabilistic powerdomain of evaluations*. In *Proceedings of the 4th Annual IEEE Symposium on Logic in Computer Science (LICS)*, pages 186–195, 1989.
6. A. Jung and R. Tix. *The troublesome probabilistic powerdomain*. *Electronic Notes in Theoretical Computer Science*, 13:70–91, 1998.
7. D. S. Scott. *Continuous lattices*. In *Toposes, Algebraic Geometry and Logic*, Lecture Notes in Mathematics, vol. 274, pages 97–136. Springer, Berlin, 1972.
8. P. Selinger and B. Valiron. *A linear-non-linear model for a quantum lambda calculus*. *Information and Computation*, 207(5):603–629, 2009.
9. M. B. Smyth and G. D. Plotkin. *The category-theoretic solution of recursive domain equations*. *SIAM Journal on Computing*, 11(4):761–783, 1982.
10. M. Ying. *Foundations of Quantum Programming*. Morgan Kaufmann / Elsevier, 2016.

A Complete Lean source

Role	File
Vendored Scott 1972 foundation	vendor/scott1972/Scott1972.lean
Vendored Scott 1972 foundation	vendor/scott1972/Scott1972/ContinuousLattice/Constr
Vendored Scott 1972 foundation	vendor/scott1972/Scott1972/ContinuousLattice/Functi
Vendored Scott 1972 foundation	vendor/scott1972/Scott1972/ContinuousLattice/Functi
Vendored Scott 1972 foundation	vendor/scott1972/Scott1972/ContinuousLattice/Inject
Vendored Scott 1972 foundation	vendor/scott1972/Scott1972/ContinuousLattice/Invers
Vendored Scott 1972 foundation	vendor/scott1972/Scott1972/ContinuousLattice/Milner
Vendored Scott 1972 foundation	vendor/scott1972/Scott1972/ContinuousLattice/ScottM
Vendored Scott 1972 foundation	vendor/scott1972/Scott1972/ContinuousLattice/Special
Vendored Scott 1972 foundation	vendor/scott1972/Scott1972/ContinuousLattice/Theore
Vendored Scott 1972 foundation	vendor/scott1972/Scott1972/ContinuousLattice/WayBel
QLambda root import graph	QLambda.lean
QLambda development	QLambda/Adequacy.lean
QLambda development	QLambda/ChoiRayObstruction.lean
QLambda development	QLambda/Effects.lean
QLambda development	QLambda/FiniteImageNonclosure.lean
QLambda development	QLambda/HardwareAdequacy.lean
QLambda development	QLambda/HardwareChannel/Closed.lean
QLambda development	QLambda/HardwareChannel/Config.lean
QLambda development	QLambda/HardwareChannel/Coverage.lean
QLambda development	QLambda/HardwareChannel/FunApp.lean
QLambda development	QLambda/HardwareChannel/Fundamental.lean
QLambda development	QLambda/HardwareChannel/Identity.lean
QLambda development	QLambda/HardwareChannel/Productive.lean
QLambda development	QLambda/HardwareChannel/Spines.lean
QLambda development	QLambda/HardwareChannel/UnderFrame.lean
QLambda development	QLambda/HardwareChannelSemantics.lean
QLambda development	QLambda/HardwareCompletenessCounterexample.lean
QLambda development	QLambda/HardwareLogicalRelation.lean
QLambda development	QLambda/HardwareObservation.lean
QLambda development	QLambda/HardwareOperational.lean
QLambda development	QLambda/InstrumentPower.lean
QLambda development	QLambda/Interp.lean
QLambda development	QLambda/Monad.lean
QLambda development	QLambda/ObservationBasis.lean
QLambda development	QLambda/OmegaQVA.lean
QLambda development	QLambda/Operational.lean
QLambda development	QLambda/PhysicalTheory.lean
QLambda development	QLambda/QDomain.lean
QLambda development	QLambda/QuantumDomainEquation.lean
QLambda development	QLambda/QuantumInstrument.lean
QLambda development	QLambda/QuantumPower.lean
QLambda development	QLambda/QuantumStateSpace.lean
QLambda development	QLambda/RationalCP.lean
QLambda development	QLambda/RationalComplex.lean
QLambda development	QLambda/RefinementCounterexample.lean
QLambda development	QLambda/RoundedTheory.lean

Role	File
QLambda development	QLambda/RoundedTheoryMorphisms.lean
QLambda development	QLambda/RoundedTheoryOmega.lean
QLambda development	QLambda/Saturation.lean
QLambda development	QLambda/ScottFixApproximation.lean
QLambda development	QLambda/ScottLowerSet.lean
QLambda development	QLambda/Soundness.lean
QLambda development	QLambda/Syntax.lean
QLambda development	QLambda/TTComputationChoice.lean
QLambda development	QLambda/TTContinuationMonad.lean
QLambda development	QLambda/TTEternalChoice.lean
QLambda development	QLambda/TTInternalChoice.lean
QLambda development	QLambda/TTObservationBasis.lean
QLambda development	QLambda/TTPhysicalEmbedding.lean
QLambda development	QLambda/TTPhysicalPrimitives.lean
QLambda development	QLambda/TTProbChoice.lean
QLambda development	QLambda/TTRefinement.lean
QLambda development	QLambda/TTResultAlgebra.lean
QLambda development	QLambda/TTResultApproximation.lean
QLambda development	QLambda/TTResultOperations.lean
QLambda development	QLambda/TToundedTheory.lean
QLambda development	QLambda/TTTokenTheoryOperations.lean
QLambda development	QLambda/TTWeightedAggregation.lean
Palomar challenge statements	Challenge.lean
Palomar compared solutions	Solution.lean

Primary source (OCR plain text): [sources/ScottContinLatt1972.md](#) — transcription of [Sco72] for use in the Lean development (see §2).

Files appear in a stable vendor/root/project order. Each block is a verbatim copy of the repository file at generation time.

A.1 vendor/scott1972/Scott1972.lean

17 lines.

Lean 4 source

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
Github: https://github.com/catskillsresearch/scott1972
-/

import Scott1972.ContinuousLattice.Injective
import Scott1972.ContinuousLattice.WayBelow
import Scott1972.ContinuousLattice.Specialization
import Scott1972.ContinuousLattice.ScottMaps
import Scott1972.ContinuousLattice.MilnerCorrection
import Scott1972.ContinuousLattice.Constructions
import Scott1972.ContinuousLattice.FunctionSpaces
import Scott1972.ContinuousLattice.Theorem212
import Scott1972.ContinuousLattice.InverseLimits
import Scott1972.ContinuousLattice.FunctionSpaceTower

```


A.2 vendor/scott1972/Scott1972/ContinuousLattice/Constructions.lean

515 lines.

Lean 4 source (lines 1–400)

```
/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
Github: https://github.com/catskillsresearch/scott1972
-/

import Scott1972.ContinuousLattice.MilnerCorrection
import Scott1972.ContinuousLattice.ScottMaps
import Scott1972.ContinuousLattice.Injective
import Mathlib.Order.Preorder.Finite

/-!
# Continuous lattice constructions (Scott 1972, S2.8-2.12)

The Milner correction (March 1972, pp. 135-136) is in `MilnerCorrection.lean`. Full proofs of
2.8-2.12 under `CoarserThanScottTopology` are the remaining 1972 items; the Sierpinski
injectivity base case (1.2) is already complete.

This file additionally proves Scott's first two example/closure results, the order-theoretic
content of Propositions 2.8 (finite lattices are continuous) and 2.9 (products of continuous
lattices are continuous). The accompanying topological claims of 2.9-2.10 ("the induced
topology agrees with the product / subspace topology") are the parts that require the Milner
correction and remain open.
-/

namespace Scott1972.ContinuousLattice

open Topology Set

variable {D : Type*} [CompleteLattice D]

/-- A non-empty finite directed set attains its supremum:  $\text{sqsup } S \text{ in } S$ . A maximal
element of
`S` (which exists by finiteness) is, by directedness, the greatest element, hence the
supremum. This is the order-theoretic heart of "finite ? continuous" (Scott 1972, 2.8). -/
theorem directedOn_finite_sSup_mem {S : Set D} (hSfin : S.Finite) (hSne : S.Nonempty)
(hSdir : DirectedOn (* <= *) S) : sSup S in S := by
  obtain <m, hm> := hSfin.exists_maximal hSne
  have hub : m in upperBounds S := by
    intro s hs
    obtain <c, hcS, hmc, hsc> := hSdir m hm.1 s hs
    exact hsc.trans (hm.2 hcS hmc)
  have hlub : IsLUB S m := <hub, fun b hb => hb hm.1>
  rw [hlub.sSup_eq]
  exact hm.1

/-- Scott 1972, Proposition 2.8. A finite lattice is a continuous lattice. In a finite
lattice every principal up-set  $\text{Set.Ici } y$  is Scott-open (a non-empty directed set is finite,
so it attains its supremum), hence  $y \ll y$ ; therefore  $y$  is the supremum of  $\{x \mid x \ll y\}$ . -/
theorem proposition_2_8 [Finite D] : IsContinuousLattice D := by
  intro y
  have hopen : ScottOpen (Set.Ici y) := by
    refine <isUpperSet_Ici y, fun S hSne hSdir hmem => ?_>
    exact <sSup S, directedOn_finite_sSup_mem (Set.toFinite S) hSne hSdir, hmem>
  have hyy : y << y := wayBelow_self_iff_scottOpen_Ici.mpr hopen
  exact <fun x hx => hx.le, fun b hb => hb hyy>
```

-- **Scott 1972, Proposition 2.9(a) (order-theoretic content). ** The Cartesian product of any family of continuous lattices is a continuous lattice. (Part (b), that the induced topology of the product agrees with the product topology, is `proposition\_2\_9\_b` below; `proposition\_2\_9` bundles the two.)

The key step is that if $a \leq y_i$ in the factor D_i , then the cylinder element $[a]?$ (equal to a in coordinate i and False elsewhere) is way below y in the product: the preimage $\{z \mid z_i \text{ in } U\}$ of a Scott-open witness $U \text{ subseq } D_i$ is Scott-open in the product

(suprema are computed coordinatewise). Any upper bound b of $\{x \mid x \leq y\}$ therefore dominates every $[a]?$, so $a = ([a]?)_i \leq b_i$; ranging over $a \leq y_i$ and using continuity of

D_i gives $y_i \leq b_i$ for all i , i.e. $y \leq b$. -/

theorem proposition_2_9_a {? : Type*} (E : ? -> Type*) [forall i, CompleteLattice (E i)]

(hE : forall i, IsContinuousLattice (E i)) : IsContinuousLattice (forall i, E i) := by

classical

intro y

refine <fun x hx => hx.le, fun b hb => ?_>

rw [Pi.le_def]

intro i

rw [<- (hE i).sSup_wayBelow (y i)]

apply sSup_le

intro a ha

set e : (forall j, E j) := Function.update (False : forall j, E j) i a with he

have hei : e i = a := by rw [he]; exact Function.update_self i a _

have hcyl : e <= y := by

obtain <U, hU, hyiU, hUsub> := ha

refine <{z : forall j, E j | z i in U}, ?_, hyiU, ?_>

* refine <fun z w hzw hz => hU.1 (hzw i) hz, fun S hSne hSdir hmem => ?_>

rw [Set.mem_setOf_eq, sSup_apply_eq_sSup_image] at hmem

have hdir' : DirectedOn (* <= *) (Function.eval i '' S) := by

rintro _ <f, hf, rfl> _ <g, hg, rfl>

obtain <h, hhS, hfh, hgh> := hSdir f hf g hg

exact <Function.eval i h, <h, hhS, rfl>, hfh i, hgh i>

obtain <t, hting, htU> := hU.2 (hSne.image _) hdir' hmem

obtain <f, hfS, rfl> := hting

exact <f, hfS, htU>

* intro z hz

rw [Set.mem_Ici, Pi.le_def]

intro j

rcases eq_or_ne j i with rfl | hji

* rw [hei]; exact Set.mem_Ici.1 (hUsub hz)

* rw [he, Function.update_of_ne hji]; exact bot_le

have hle : e i <= b i := (hb hcyl) i

rw [hei] at hle

exact hle

-/! ### Proposition 2.9(b): the induced topology of a product is the product topology

Scott 1972, Proposition 2.9 also asserts that the Scott topology of the product $\prod_i D_i$ of continuous lattices coincides with the topological product of the Scott topologies of the factors.

We prove the two inclusions:

* **Product subseq Scott** ($\text{scottTopologicalSpace} \leq \text{Pi.topologicalSpace}$): every projection

$\text{eval } i$ preserves directed suprema (they are computed coordinatewise), hence is Scott-continuous,

hence the Scott topology of the product is finer than each induced topology, i.e. finer than their

infimum (the product topology).

* **Scott subseq Product** ($\text{Pi.topologicalSpace} \leq \text{scottTopologicalSpace}$): given a

```

    Scott-open `U` and a
    point `z` in `U`, the `Up a` basis (`exists_wayBelow_Ici_subset`) yields `a << z` with `a
    subseq U`. A
    way-below element of a product has finite support (`wayBelow_finite_support`) and is
    way-below in each coordinate (`wayBelow_proj`); the resulting finite box
    `{i in F} eval i ^-1` ( `Up a_i`-neighbourhood of `z_i`) is a product-open neighbourhood of
    `z` inside
    `a subseq U`. -/

/-- Plugging a value into a fixed coordinate, `v |-> Function.update z i v`, preserves
    directed
suprema: away from `i` the result is the constant `z j`, and at `i` it is the identity. -/
theorem update_preservesDirectedSup {? : Type*} [DecidableEq ?] {E : ? -> Type*}
  [forall i, CompleteLattice (E i)] (z : forall i, E i) (i : ?) :
  PreservesDirectedSup (fun v : E i => Function.update z i v) := by
  intro T hTne _
  show Function.update z i (sSup T) = sSup ((fun v : E i => Function.update z i v) '' T)
  funext j
  rw [sSup_apply_eq_sSup_image, Set.image_image]
  rcases eq_or_ne j i with hji | hji
  * rw [hji, Function.update_self]
    have h : (fun v : E i => Function.eval i (Function.update z i v)) = id := by
      funext v; simp [Function.eval, Function.update_self]
    rw [h, Set.image_id]
  * rw [Function.update_of_ne hji]
    have h : (fun v : E i => Function.eval j (Function.update z i v)) = fun _ => z j := by
      funext v; simp [Function.eval, Function.update_of_ne hji]
    rw [h, hTne.image_const, sSup_singleton]

/-- A way-below relation in a product projects to each coordinate: if `a << z` in `{i E_i}`
    then
`a_i << z_i`. The witnessing Scott-open neighbourhood of `z_i` is the preimage of a product
    Scott-open
witness under `v |-> Function.update z i v`, which is Scott-open by `
    update_preservesDirectedSup`. -/
theorem wayBelow_proj {? : Type*} {E : ? -> Type*} [forall i, CompleteLattice (E i)]
  {a z : forall i, E i} (h : a << z) (i : ?) : a i << z i := by
  classical
  obtain <W, hW, hzW, hWsub> := h
  refine <(fun v : E i => Function.update z i v) ^-1' W, ?_, ?_, ?_>
  * exact scottOpen_preimage (update_preservesDirectedSup z i) hW
  * show Function.update z i (z i) in W
    rw [Function.update_eq_self]; exact hzW
  * intro v hv
    have hav : a <= Function.update z i v := Set.mem_Ici.1 (hWsub hv)
    have := hav i
    rwa [Function.update_self] at this

/-- A way-below element of a product has finite support: if `a << z` in `{i E_i}` then `a? =
    False` for
all but finitely many `j`. The finite truncations `Z F = (fun j => if j in F then z j else
    False)` form a
directed family with supremum `z`; since `a << z = sqsup _F Z F`, already `a <= Z F` for
    some finite `F`,
forcing `a? = False` off `F`. -/
theorem wayBelow_finite_support {? : Type*} {E : ? -> Type*} [forall i, CompleteLattice (E i)]
  [forall i, CompleteLattice (E i)] (h : a << z) : exists F : Finset ?, forall j notin F, a j =
    False := by
  classical
  set Z : Finset ? -> (forall j, E j) := fun F j => if j in F then z j else False with hZ
  set ? : Set (forall j, E j) := Set.range Z with h?
  have hmono : Monotone Z := by

```

```

intro F G hFG
rw [Pi.le_def]; intro j
simp only [hZ]
by_cases hjF : j in F
* rw [if_pos hjF, if_pos (hFG hjF)]
* rw [if_neg hjF]; exact bot_le
have h?ne : ?.Nonempty := <Z {}, {}, rfl>
have h?dir : DirectedOn (* <= *) ? := by
  rintro _ <F, rfl> _ <G, rfl>
  exact <Z (F U G), <F U G, rfl>, hmono Finset.subset_union_left,
    hmono Finset.subset_union_right>
have hsup : sSup ? = z := by
  apply le_antisymm
  * apply sSup_le
    rintro _ <F, rfl>
    rw [Pi.le_def]; intro j
    simp only [hZ]
    by_cases hjF : j in F
    * rw [if_pos hjF]
    * rw [if_neg hjF]; exact bot_le
  * rw [Pi.le_def]; intro j
    rw [sSup_apply_eq_sSup_image]
    refine le_sSup <Z {j}, <{j}, rfl>, ?_
    simp [hZ, Function.eval]
rw [← hsup] at h
obtain <d, hd?, had> := (wayBelow_sSup_iff h?ne h?dir).1 h
obtain <F, rfl> := hd?
refine <F, fun j hjF => ?_>
have hj := had.le j
simp only [hZ, if_neg hjF] at hj
exact le_bot_iff.1 hj

/-- **Scott 1972, Proposition 2.9(b).** For a family of continuous lattices, the Scott topology
of
the product coincides with the product of the Scott topologies of the factors. -/
theorem proposition_2_9_b {? : Type*} (E : ? -> Type*) [forall i, CompleteLattice (E i)]
(hE : forall i, IsContinuousLattice (E i)) :
(scottTopologicalSpace : TopologicalSpace (forall i, E i)) =
  @Pi.topologicalSpace ? E (fun _ => scottTopologicalSpace) := by
  classical
  have hprod : IsContinuousLattice (forall i, E i) := proposition_2_9_a E hE
  apply le_antisymm
  * -- Product subteq Scott: projections preserve directed suprema, hence are Scott-
    continuous.
    refine le_iInf fun i => ?_
    rw [← continuous_iff_le_induced]
    exact continuous_of_preservesDirectedSup (fun _ _ => sSup_apply_eq_sSup_image)
  * -- Scott subteq Product: every Scott-open set is a union of finite product-open boxes.
    intro U hU
    rw [isOpen_iff_scottOpen] at hU
    rw [@isOpen_iff_forall_mem_open _ (@Pi.topologicalSpace ? E (fun _ => scottTopologicalSpace
    ))]
    intro z hz
    obtain <a, haz, haIci> := exists_wayBelow_Ici_subset hprod hU hz
    obtain <F, hF> := wayBelow_finite_support haz
    have hproj : forall i, a i << z i := fun i => wayBelow_proj haz i
    choose V hVopen hzV hVsub using hproj
    refine <? i in F, (fun w : forall j, E j => w i) ^-1' V i, ?_, ?_, ?_>
    * -- the box lies inside `a subteq U`
      intro w hw
      rw [Set.mem_iInter_2] at hw
      refine haIci (Set.mem_Ici.2 fun j => ?_)
      by_cases hjF : j in F

```

```

    * exact Set.mem_Ici.1 (hVsub j (hw j hjF))
    * rw [hF j hjF]; exact bot_le
  * -- the box is product-open: a finite intersection of cylinders over Scott-open factors
  refine @isOpen_biInter_finset (forall j, E j) ?
    (@Pi.topologicalSpace ? E (fun _ => scottTopologicalSpace)) F
    (fun i => (fun w : forall j, E j => w i) ^-1' V i) (fun i _ => ?_)
  have hVi : @isOpen (E i) scottTopologicalSpace (V i) := isOpen_iff_scottOpen.mpr (hVopen
i)
  have hind : @isOpen _
    (TopologicalSpace.induced (fun w : forall j, E j => w i) scottTopologicalSpace)
    ((fun w : forall j, E j => w i) ^-1' V i) :=
    (isOpen_induced_iff (t := scottTopologicalSpace)).mpr <V i, hVi, rfl>
  exact iInf_le
    (fun i => TopologicalSpace.induced (fun w : forall j, E j => w i)
scottTopologicalSpace) i _ hind
  * -- the box contains `z`
  rw [Set.mem_iInter_2]
  exact fun i _ => hzV i

/-- **Scott 1972, Proposition 2.9 (full statement).** The product of a family of continuous
lattices
is again a continuous lattice (`proposition_2_9_a`) whose Scott topology agrees with the
product
topology (`proposition_2_9_b`). -/
theorem proposition_2_9 {? : Type*} (E : ? -> Type*) [forall i, CompleteLattice (E i)]
(hE : forall i, IsContinuousLattice (E i)) :
IsContinuousLattice (forall i, E i) /\
(scottTopologicalSpace : TopologicalSpace (forall i, E i)) =
@Pi.topologicalSpace ? E (fun _ => scottTopologicalSpace) :=
<proposition_2_9_a E hE, proposition_2_9_b E hE>

/-! ### Proposition 2.11: continuous lattices are injective

The substance of Scott's Theorem 2.12. We give the explicit extension operator
`g(y) = sqsup {V ? y open} sqcap f''(e^-1V)` and prove (a) it extends `f` along an
embedding `e`
(using continuity of `D` to interpolate from below) and (b) it is Scott-continuous (using the
`Up a` basis of the Scott topology). -/

section InjectiveExtension

variable {X Y : Type*} [TopologicalSpace X] [TopologicalSpace Y] {E : Type*} [CompleteLattice E
]

/-- Scott's canonical extension of `f : X -> E` along `e : X -> Y` (Scott 1972, proof of
2.11):
`y |-> sqsup { sqcap f''(e^-1V) : V an open neighbourhood of y }`. No topology on `E` is
needed to *state*
the operator -- it is purely order-theoretic. -/
def scottExtend (e : X -> Y) (f : X -> E) (y : Y) : E :=
sSup {d | exists V : Set Y, IsOpen V /\ y in V /\ d = sInf (f '' (e ^-1' V))}

theorem scottExtend_aux_nonempty (e : X -> Y) (f : X -> E) (y : Y) :
{d | exists V : Set Y, IsOpen V /\ y in V /\ d = sInf (f '' (e ^-1' V))}.Nonempty :=
<_, Set.univ, isOpen_univ, Set.mem_univ y, rfl>

/-- The defining family of `scottExtend` is directed: open neighbourhoods are closed under
intersection, and `sqcap f''(e^-1 *)` is monotone in the neighbourhood (smaller set, larger
inf). -/
theorem scottExtend_aux_directed (e : X -> Y) (f : X -> E) (y : Y) :
DirectedOn (* <= *) {d | exists V : Set Y, IsOpen V /\ y in V /\ d = sInf (f '' (e
^-1' V))} := by
rintro _ <V_1, hV_1o, hyV_1, rfl> _ <V_2, hV_2o, hyV_2, rfl>

```

```

refine <sInf (f ' (e ^-1' (V_1 I V_2))), <V_1 I V_2, hV_1o.inter hV_2o, <hyV_1, hyV_2>,
  rfl>, ?_, ?_>
* exact sInf_le_sInf (Set.image_mono (Set.preimage_mono Set.inter_subset_left))
* exact sInf_le_sInf (Set.image_mono (Set.preimage_mono Set.inter_subset_right))

/-- The extension agrees with `f` on the (embedded) subspace. The `<= ` direction is immediate
(`f x_0` is one of the values being met); the `>= ` direction uses continuity of `E`: for each
`a << f x_0` the Scott-open `Up a` pulls back along the continuous `f` and, by the embedding
, to an
open `V` subsequence `Y` on whose `e`-preimage `f >= a`, so `a <= sqcap f'(e^-1V) <= g(e
x_0)`. -/
theorem scottExtend_eq_of_continuous (hE : IsContinuousLattice E) (e : X -> Y)
  (he : IsEmbedding e) (f : X -> E) (hf : @Continuous X E _ scottTopologicalSpace f) (x_0 :
    X) :
  scottExtend e f (e x_0) = f x_0 := by
  apply le_antisymm
  * refine sSup_le ?_
    rintro d <V, hVo, hex_OV, rfl>
    exact sInf_le <x_0, hex_OV, rfl>
  * rw [ <- hE.sSup_wayBelow (f x_0) ]
    refine sSup_le fun a ha => ?_
    have hWopen : @IsOpen E scottTopologicalSpace {z : E | a << z} :=
      isOpen_iff_scottOpen.mpr (scottOpen_wayBelow a)
    have hpre : IsOpen (f ^-1' {z : E | a << z}) := continuous_def.mp hf _ hWopen
    rw [he.isInducing.isOpen_iff] at hpre
    obtain <V, hVo, hVeq> := hpre
    have hx_OV : x_0 in e ^-1' V := by rw [hVeq]; exact ha
    refine le_trans ?_ (le_sSup <V, hVo, hx_OV, rfl>)
    refine le_sInf ?_
    rintro w <x, hxV, rfl>
    have hxW : x in f ^-1' {z : E | a << z} := by rw [ <- hVeq]; exact hxV
    exact (hxW : a << f x).le

/-- The extension is Scott-continuous. For a Scott-open `U` and a point `y_0` with `g y_0` in
`U`, the
basis lemma gives `a << g y_0` with `Up a` subsequence `U`; since `g y_0` is a directed
supremum, `a << sqcap f'(e^-1V)`
for some open `V` ? `y_0`, and that value is `<= g y` for every `y` in `V`, so `V` subsequence
`g^-1U`. -/
theorem scottExtend_continuous (hE : IsContinuousLattice E) (e : X -> Y) (f : X -> E) :
  @Continuous Y E _ scottTopologicalSpace (scottExtend e f) := by
  letI : TopologicalSpace E := scottTopologicalSpace
  rw [continuous_def]
  intro U hU
  rw [isOpen_iff_scottOpen] at hU
  rw [isOpen_iff_forall_mem_open]
  intro y_0 hy_0
  have hgy_OU : scottExtend e f y_0 in U := hy_0
  obtain <a, haz, hasub> := exists_wayBelow_subset hE hU hgy_OU
  obtain <d, hd, had> := (wayBelow_sSup_iff (scottExtend_aux_nonempty e f y_0)
    (scottExtend_aux_directed e f y_0)).1 haz
  obtain <V, hVo, hy_OV, rfl> := hd
  refine <V, ?_, hVo, hy_OV>
  intro y' hy'V
  show scottExtend e f y' in U
  refine hasub ?_
  show a << scottExtend e f y'
  exact had.trans_le (le_sSup <V, hVo, hy'V, rfl>)

/-- For a continuous `f' : Y -> E` into a continuous lattice `E` (with its Scott topology),
the
value `f' y` is reconstructed as the supremum over open neighbourhoods `U ? y` of the meets
`sqcap f'(U)`. This is the order-theoretic content behind the maximality clause of

```

```

Proposition 3.8:
the `<= ` direction interpolates from below using `f' y = sqsup {a | a << f' y}` and the
openness of each
`f'~1(Up a)`; the `>= ` direction is immediate since `f' y in f''(U)` whenever `y in U`.
-/
theorem continuous_eq_sSup_openInfs (hE : IsContinuousLattice E) {f' : Y -> E}
  (hf' : @Continuous Y E _ scottTopologicalSpace f') (y : Y) :
  f' y = sSup {d | exists U : Set Y, IsOpen U /\ y in U /\ d = sInf (f' '' U)} := by
  apply le_antisymm
  * rw [ <- hE.sSup_wayBelow (f' y)]
    refine sSup_le fun a ha => ?_
    have hWopen : @IsOpen E scottTopologicalSpace {z : E | a << z} :=
      isOpen_iff_scottOpen.mpr (scottOpen_wayBelow a)
    have hpre : IsOpen (f' ~1' {z : E | a << z}) := continuous_def.mp hf' _ hWopen
    have hyU : y in f' ~1' {z : E | a << z} := ha
    refine le_trans ?_ (le_sSup <f' ~1' {z : E | a << z}, hpre, hyU, rfl>)
    refine le_sInf ?_
    rintro w <z, hzU, rfl>
    exact (hzU : a << f' z).le
  * refine sSup_le ?_
    rintro d <U, hUo, hyU, rfl>
    exact sInf_le <y, hyU, rfl>

/-- **Maximality clause of Scott 1972, Proposition 3.8.** Any continuous solution `f'` of
`f' comp e = f` lies below `scottExtend e f`. Following Scott: expand `f'` via
`continuous_eq_sSup_openInfs`, restrict each meet from `U` to the embedded subspace `e(X) I U`
(only enlarging the meet), and recognize the result as a defining term of `scottExtend`. -/
theorem scottExtend_maximal (hE : IsContinuousLattice E) (e : X -> Y) {f : X -> E} {f' : Y
-> E}
  (hf' : @Continuous Y E _ scottTopologicalSpace f') (h_ext : forall x, f' (e x) = f x) (y :
Y) :
  f' y <= scottExtend e f y := by
  rw [continuous_eq_sSup_openInfs hE hf' y]
  refine sSup_le ?_
  rintro d <U, hUo, hyU, rfl>
  refine le_trans ?_ (le_sSup <U, hUo, hyU, rfl>)
  refine le_sInf ?_
  rintro w <x, hxU, rfl>
  rw [ <- h_ext x]
  exact sInf_le <e x, hxU, rfl>

/-- **Scott 1972, remark following 3.8.** `scottExtend e g` is also the maximal *sub*-solution:
any
continuous `f'` with `f' comp e sqsub g` satisfies `f' sqsub scottExtend e g`. Same proof
as
`scottExtend_maximal`, replacing the final equality `f' (e x) = f x` by the inequality
`f' (e x) <= g x`. -/
theorem scottExtend_maximal_le (hE : IsContinuousLattice E) (e : X -> Y) {g : X -> E} {f' :
Y -> E}
  (hf' : @Continuous Y E _ scottTopologicalSpace f') (h_le : forall x, f' (e x) <= g x) (y
: Y) :
  f' y <= scottExtend e g y := by
  rw [continuous_eq_sSup_openInfs hE hf' y]
  refine sSup_le ?_
  rintro d <U, hUo, hyU, rfl>
  refine le_trans ?_ (le_sSup <U, hUo, hyU, rfl>)
  refine le_sInf ?_
  rintro w <x, hxU, rfl>
  exact le_trans (sInf_le <e x, hxU, rfl>) (h_le x)

/-- **Scott 1972, Proposition 3.8.** If `E` is a continuous lattice and `e : X -> Y` a
subspace

```

```

embedding, then for each continuous `f : X → E` the explicit formula `scottExtend e f` is
the
*maximal extension* of `f` to `[Y → E]` : it is Scott-continuous (`scottExtend_continuous`),
it
restricts to `f` along `e` (`scottExtend_eq_of_continuous`), and it dominates every continuous
solution of `f` comp `e = f` (`scottExtend_maximal`). -/
theorem proposition_3_8 (hE : IsContinuousLattice E) (e : X → Y) (he : IsEmbedding e)
  (f : X → E) (hf : @Continuous X E _ scottTopologicalSpace f) :
  @Continuous Y E _ scottTopologicalSpace (scottExtend e f)
  /\ (forall x, scottExtend e f (e x) = f x)
  /\ (forall f' : Y → E, @Continuous Y E _ scottTopologicalSpace f' → (forall x,
    f' (e x) = f x) →
    forall y, f' y ≤ scottExtend e f y) :=
<scottExtend_continuous hE e f,
  fun x => scottExtend_eq_of_continuous hE e he f hf x,
  fun f' hf' h_ext y => scottExtend_maximal hE e hf' h_ext y>

```

end InjectiveExtension

Lean 4 source (lines 401–515)

```

/-- **Scott 1972, Proposition 2.11.** Every continuous lattice is an injective space under its
induced (Scott) topology. The witness is `scottExtend`, which extends any continuous `f` along
any embedding `e` (`scottExtend_eq_of_continuous`) and is itself continuous
(`scottExtend_continuous`). -/
theorem proposition_2_11 {E : Type*} [CompleteLattice E] (hE : IsContinuousLattice E) :
  @IsInjectiveSpace E scottTopologicalSpace := by
  let I : TopologicalSpace E := scottTopologicalSpace
  intro X Y _ e he f
  exact <<scottExtend e f, scottExtend_continuous hE e f>,
  fun x => scottExtend_eq_of_continuous hE e he f f.continuous x>

/-- The Sierpinski space `Prop` (Scott's `0`) is a continuous lattice: it is a finite
complete
lattice, so Proposition 2.8 applies. -/
theorem isContinuousLattice_prop : IsContinuousLattice Prop :=
  proposition_2_8

/-- The Scott topology on Scott's two-point space `0 = Prop` is exactly the Sierpinski
topology
(`generateFrom {True}`). The Scott-open sets of `Prop` are the upper sets `{}`, `{True}`, `
univ`,
which are precisely the Sierpinski-open sets. This is the topological identification underlying
Theorem 2.12: the building block `0` carries its Scott topology. -/
theorem scottTopology_prop :
  (scottTopologicalSpace : TopologicalSpace Prop) = sierpinskSpace := by
  apply le_antisymm
  * -- `scott ≤ sierpinski`: the single Sierpinski sub-basic open `{True}` is Scott-open.
  show (scottTopologicalSpace : TopologicalSpace Prop) ≤ TopologicalSpace.generateFrom {True}
  apply le_generateFrom
  intro s hs
  rw [Set.mem_singleton_iff] at hs
  subst hs
  rw [isOpen_iff_scottOpen]
  refine <?_, ?_>
  * intro a b hab ha
  rw [Set.mem_singleton_iff] at ha | -
  exact le_antisymm le_top (ha |> hab)
  * intro S _ hmem
  rw [Set.mem_singleton_iff] at hmem
  have hex : exists p in S, p := by rw [← sSup_Prop_eq, hmem]; trivial
  obtain <p, hpS, hp> := hex
  exact <p, hpS, by rw [Set.mem_singleton_iff]; exact eq_true hp>

```



```

* -- `sierpinski` <= `scott`: every Scott-open upper set of `Prop` is `{}`, `{True}`, or `
  univ`.
  rw [TopologicalSpace.le_def]
  intro U hU
  rw [isOpen_iff_scottOpen] at hU
  by_cases hT : True in U
  * by_cases hF : False in U
    * have hUniv : U = Set.univ := by
      ext p
      simp only [Set.mem_univ, iff_true]
      by_cases hp : p
      * rwa [eq_true hp]
      * rwa [eq_false hp]
    rw [hUniv]; exact isOpen_univ
  * have hUtrue : U = {True} := by
    ext p
    rw [Set.mem_singleton_iff]
    constructor
    * intro hpU
      by_cases hp : p
      * exact eq_true hp
      * exact absurd (eq_false hp |> hpU) hF
    * intro hp; rw [hp]; exact hT
  rw [hUtrue]; exact isOpen_singleton_true
* have hUempty : U = {} := by
  ext p
  simp only [Set.mem_empty_iff_false, iff_false]
  intro hpU
  exact hT (hU.1 le_top hpU)
  rw [hUempty]; exact isOpen_empty

/-- A power of Scott's two-point space  $2^0 = \text{Prop}$  is a continuous lattice:  $\text{Prop}$  is a
  continuous
  lattice ( $\text{isContinuousLattice\_prop}$ ) and products of continuous lattices are continuous
  (Proposition 2.9(a)). This is the order-theoretic content of "a Cartesian power of  $2^0$  is a
  continuous lattice", the construction Theorem 2.12 retracts onto. -/
theorem sierpinskiPower_isContinuousLattice (? : Type*) : IsContinuousLattice (? -> Prop) :=
  proposition_2_9_a (fun _ => Prop) (fun _ => isContinuousLattice_prop)

/-- The Scott topology on a power  $2^0 = \text{Prop}$  of the Sierpinski space coincides with the
  product
  (= Sierpinski power) topology. Combine Proposition 2.9(b) (the Scott topology of a product is
  the
  product of the factors' Scott topologies) with  $\text{scottTopology\_prop}$  (each factor's Scott
  topology
  is the Sierpinski topology). -/
theorem scottTopology_sierpinskiPower (? : Type*) :
  (scottTopologicalSpace : TopologicalSpace (? -> Prop)) =
  (inferInstance : TopologicalSpace (? -> Prop)) := by
  rw [proposition_2_9_b (fun _ => Prop) (fun _ => isContinuousLattice_prop)]
  show (@Pi.topologicalSpace ? (fun _ => Prop) (fun _ => scottTopologicalSpace)) =
    @Pi.topologicalSpace ? (fun _ => Prop) (fun _ => sierpinskiSpace)
  congr 1
  funext _
  exact scottTopology_prop

/-- **Scott 1972, Theorem 2.12 (forward direction).** Every continuous lattice is an injective
  space under its Scott topology. This is the substantial half of the equivalence "injective
  spaces = continuous lattices", and is exactly Proposition 2.11. -/
theorem theorem_2_12_forward {E : Type*} [CompleteLattice E] (hE : IsContinuousLattice E) :
  @IsInjectiveSpace E scottTopologicalSpace :=
  proposition_2_11 hE

```

```

/-- **Scott 1972, Theorem 2.12 (backward, Sierpinski base case).** `Prop` is a continuous
lattice (`isContinuousLattice_prop`), so its injectivity (Proposition 1.2) is an instance of
the
equivalence. -/
theorem theorem_2_12_sierpinski_backward (_h : IsContinuousLattice Prop) : IsInjectiveSpace
  Prop :=
  proposition_1_2

/-- **Scott 1972, Theorem 2.12 (injectivity half, unconditional).** `Prop` is injective
(Sierpinski); the continuous-lattice half is now `isContinuousLattice_prop`. -/
theorem theorem_2_12_injective_half : IsInjectiveSpace Prop :=
  proposition_1_2

/-- The Sierpinski space `0 = Prop` realizes the smallest case of Theorem 2.12: it is both
injective (1.2) and a continuous lattice (2.8). -/
theorem sierpinski_isInjective_and_isContinuousLattice :
  IsInjectiveSpace Prop /\ IsContinuousLattice Prop :=
  <proposition_1_2, isContinuousLattice_prop>

end Scott1972.ContinuousLattice

```

A.3 vendor/scott1972/Scott1972/ContinuousLattice/FunctionSpaceTower.lean

639 lines.

Lean 4 source (lines 1–400)

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
Github: https://github.com/catskillsresearch/scott1972
-/

import Scott1972.ContinuousLattice.InverseLimits
import Mathlib.Order.Hom.Basic

/-!
# The function-space tower and Scott's `D_ inf`  ~=  [D_ inf  -> D_ inf ]` (Scott 1972, S4,
Theorem 4.4)

Starting from a continuous lattice `D_0` together with a chosen projection `j_0 : [D_0 -> D_0
] -> D_0`
(Proposition 3.13 provides one), we build the recursively-defined ?-system

`D_{n+1} = [D_n -> D_n]`, `j_{n+1} = [j_n -> j_n]` (the function-space functor,
Proposition 3.7),

and form its inverse limit `D_ inf`. Theorem 4.4 is that `D_ inf` is *homeomorphic to its own
function
space* `[D_ inf -> D_ inf ]`.
-/

namespace Scott1972.ContinuousLattice

universe u

/-- A complete lattice bundled with its instance, used to define the function-space tower by
recursion on `Nat` (the type at level `n+1` depends on the lattice structure at level `n`). -/
structure CLat : Type (u + 1) where
  carrier : Type u
  [str : CompleteLattice carrier]

```

```

attribute [instance] CLat.str

/-- The tower `D_0, [D_0 -> D_0], [[D_0 -> D_0] -> [D_0 -> D_0]], ...` as bundled complete
lattices. -/
noncomputable def towerCLat (D_0 : CLat.{u}) : Nat -> CLat.{u}
| 0 => D_0
| (n + 1) => <ScottMap (towerCLat D_0 n).carrier (towerCLat D_0 n).carrier>

/-- The carrier `D_n` of the function-space tower. -/
def towerType (D_0 : CLat.{u}) (n : Nat) : Type u := (towerCLat D_0 n).carrier

noncomputable instance towerCompleteLattice (D_0 : CLat.{u}) (n : Nat) :
  CompleteLattice (towerType D_0 n) := (towerCLat D_0 n).str

@[simp] theorem towerType_zero (D_0 : CLat.{u}) : towerType D_0 0 = D_0.carrier := rfl

/-- `D_{n+1}` is *definitionally* the function space `[D_n -> D_n]`. -/
theorem towerType_succ (D_0 : CLat.{u}) (n : Nat) :
  towerType D_0 (n + 1) = ScottMap (towerType D_0 n) (towerType D_0 n) := rfl

/-- View an element of `D_{n+1}` as the Scott map `[D_n -> D_n]` it definitionally is. -/
def towerToMap {D_0 : CLat.{u}} {n : Nat} (f : towerType D_0 (n + 1)) :
  ScottMap (towerType D_0 n) (towerType D_0 n) := f

/-- Apply an element of `D_{n+1}` as a function `D_n -> D_n` (definitional via `
towerType_succ`). -/
instance towerCoeFun {D_0 : CLat.{u}} {n : Nat} :
  CoeFun (towerType D_0 (n + 1)) (fun _ => towerType D_0 n -> towerType D_0 n) where
  coe f := towerToMap f

@[simp] theorem towerToMap_coe {D_0 : CLat.{u}} {n : Nat} (f : towerType D_0 (n + 1))
  (x : towerType D_0 n) : towerToMap f x = f x := rfl

/-! ### The function-space functor on projections (Proposition 3.7, continuous form)

`proposition_3_7_projection` builds the embedding/projection pair on function spaces as *plain
functions*; here we upgrade them to genuine Scott maps, so that `[D_n -> D_n]` is a
continuous-lattice
projection of `[D_{n+1} -> D_{n+1}]`. The map `f |-> post comp f comp pre` (conjugation
) is Scott-continuous
because directed suprema of function spaces are computed pointwise. -/

section Conj

open Set

variable {Y Z W : Type u} [CompleteLattice Y] [CompleteLattice Z] [CompleteLattice W]

/-- Conjugation `f |-> post comp f comp pre` as a bare function `[Y -> Y] -> [W ->
Z]`. -/
def conjMapFun (post : ScottMap Y Z) (pre : ScottMap W Y) (f : ScottMap Y Y) : ScottMap W Z :=
  post.comp (f.comp pre)

theorem conjMapFun_apply (post : ScottMap Y Z) (pre : ScottMap W Y) (f : ScottMap Y Y) (x : W)
  :
  conjMapFun post pre f x = post (f (pre x)) := rfl

theorem conjMap_preservesDirectedSup (post : ScottMap Y Z) (pre : ScottMap W Y) :
  PreservesDirectedSup (conjMapFun post pre) := by
  intro F hF hFdir
  apply ScottMap.ext
  intro x
  have hdir : DirectedOn (* <= *) ((fun f : ScottMap Y Y => f (pre x)) '' F) := by

```

```

    rintro _ <a, ha, rfl> _ <b, hb, rfl>
    obtain <c, hc, hac, hbc> := hFdir a ha b hb
    exact <c (pre x), <c, hc, rfl>, hac (pre x), hbc (pre x)>
show post ((sSup F : ScottMap Y Y) (pre x)) = (sSup (conjMapFun post pre '' F) : ScottMap W Z) x
rw [ScottMap.sSup_apply F (pre x), post.preservesDirectedSup_coe _ (hF.image _) hdir,
    ScottMap.sSup_apply, Set.image_image, Set.image_image]
rfl

theorem conjMap_preservesDirectedSup_apply (post : ScottMap Y Z) (pre : ScottMap W Y)
  (F : Set (ScottMap Y Y)) (hF : F.Nonempty) (hFdir : DirectedOn (* <= *) F) (y : W) :
  post ((sSup F : ScottMap Y Y) (pre y)) = (sSup (conjMapFun post pre '' F) : ScottMap W Z) y
:= by
  have hdir : DirectedOn (* <= *) ((fun f : ScottMap Y Y => f (pre y)) '' F) := by
    rintro _ <a, ha, rfl> _ <b, hb, rfl>
    obtain <c, hc, hac, hbc> := hFdir a ha b hb
    exact <c (pre y), <c, hc, rfl>, hac (pre y), hbc (pre y)>
  rw [ScottMap.sSup_apply F (pre y), post.preservesDirectedSup_coe _ (hF.image _) hdir,
      ScottMap.sSup_apply, Set.image_image, Set.image_image]
  rfl

/-- Conjugation `f |-> post comp f comp pre` as a Scott map `[Y -> Y] -> [W -> Z]`.
-/
noncomputable def conjMap (post : ScottMap Y Z) (pre : ScottMap W Y) :
  ScottMap (ScottMap Y Y) (ScottMap W Z) :=
  <conjMapFun post pre, continuous_of_preservesDirectedSup (conjMap_preservesDirectedSup post
    pre)>

@[simp] theorem conjMap_apply (post : ScottMap Y Z) (pre : ScottMap W Y) (f : ScottMap Y Y) (x
  : W) :
  conjMap post pre f x = post (f (pre x)) := rfl

end Conj

/-- **Scott 1972, Proposition 3.7 (continuous projection on the diagonal).** If `D` is a
continuous-lattice projection of `D'`, then `[D -> D]` is a projection of `[D' -> D']` via
`i_{[*]}(f) = i comp f comp j` and `j_{[*]}(g) = j comp g comp i`. -/
noncomputable def IsContinuousLatticeProjection.functionSpace
  {A B : Type u} [CompleteLattice A] [CompleteLattice B]
  (P : IsContinuousLatticeProjection A B) :
  IsContinuousLatticeProjection (ScottMap A A) (ScottMap B B) where
  incl := conjMap P.incl P.retr
  retr := conjMap P.retr P.incl
  retr_incl f := by
    apply ScottMap.ext; intro x
    simp only [conjMap_apply, P.retr_incl]
  incl_retr_le g := by
    rw [ScottMap.le_def]; intro x
    simp only [conjMap_apply]
    exact le_trans (P.incl_retr_le _) (g.monotone (P.incl_retr_le x))

/-- The projection tower `j_{n+1} = [j_n -> j_n]`, anchored at a chosen base projection
`j_0 : [D_0 -> D_0] -> D_0`. -/
noncomputable def towerProj (D_0 : CLat.{u})
  (j_0 : IsContinuousLatticeProjection D_0.carrier (ScottMap D_0.carrier D_0.carrier)) :
  forall n, IsContinuousLatticeProjection (towerType D_0 n) (towerType D_0 (n + 1))
| 0 => j_0
| (n + 1) => (towerProj D_0 j_0 n).functionSpace

theorem towerProj_succ (D_0 : CLat.{u})
  (j_0 : IsContinuousLatticeProjection D_0.carrier (ScottMap D_0.carrier D_0.carrier)) (n :
  Nat) :
  towerProj D_0 j_0 (n + 1) = (towerProj D_0 j_0 n).functionSpace := rfl

```

```

section Tower

variable (D_0 : CLat.{u})
(j_0 : IsContinuousLatticeProjection D_0.carrier (ScottMap D_0.carrier D_0.carrier))

/-- **Scott 1972, S4 (recursion for the embeddings).** `i_{n+1}(x) = i_n comp x comp j_n`. -/
theorem towerProj_succ_incl_apply (n : Nat) (x : towerType D_0 (n + 1)) (y : towerType D_0 (n + 1)) :
  ((towerProj D_0 j_0 (n + 1)).incl x) y
  = (towerProj D_0 j_0 n).incl (x ((towerProj D_0 j_0 n).retr y)) := rfl

/-- **Scott 1972, S4 (recursion for the projections).** `j_{n+1}(x') = j_n comp x' comp i_n`. -/
theorem towerProj_succ_retr_apply (n : Nat) (x' : towerType D_0 (n + 2)) (y : towerType D_0 n) :
  ((towerProj D_0 j_0 (n + 1)).retr x') y
  = (towerProj D_0 j_0 n).retr (x' ((towerProj D_0 j_0 n).incl y)) := rfl

/-- **Scott 1972, S4 (application is preserved).** `i_n(f(x)) = i_{n+1}(f)(i_n(x))` for `f` in `D_{n+1}`,
`x` in `D_n`. The embeddings turn functional application into application one level up. -/
theorem towerProj_incl_apply (n : Nat) (f : towerType D_0 (n + 1)) (x : towerType D_0 n) :
  (towerProj D_0 j_0 n).incl (f x)
  = ((towerProj D_0 j_0 (n + 1)).incl f) ((towerProj D_0 j_0 n).incl x) := by
  rw [towerProj_succ_incl_apply, (towerProj D_0 j_0 n).retr_incl]

end Tower

/-! ### Theorem 4.4(a): the limit maps `i_inf` and `j_inf`

We now wire the concrete inverse limit `D_inf` of the function-space tower and write down
Scott's pair

...
i_inf (x) = bigcup _n (i_{n inf } comp x_{n+1} comp j_{ inf n}) : D_inf -> [D_inf -> D_inf ]
j_inf (f) = bigcup _n i_{(n+1) inf }(j_{ inf n} comp f comp i_{n inf }) : [D_inf -> D_inf ] -> D_inf
...

Each summand is itself a Scott map (a composite of `conjMap`, `embInf`, `projInf`), so each of
`i_inf`, `j_inf` is a *supremum of Scott maps* and is therefore Scott-continuous
automatically: by
Theorem 3.3 the function space `[A -> B]` is a complete lattice in which suprema are computed
pointwise. No bespoke continuity argument is needed. -/

section LimitMaps

variable (D_0 : CLat.{u})
(j_0 : IsContinuousLatticeProjection D_0.carrier (ScottMap D_0.carrier D_0.carrier))

/-- The inverse limit `D_inf` of the function-space tower ``. -/
abbrev DInf : Type u := InverseLimit (towerType D_0) (towerProj D_0 j_0)

/-- The function space `[D_inf -> D_inf]`. -/
abbrev DInfFn : Type u := ScottMap (DInf D_0 j_0) (DInf D_0 j_0)

/-- The `n`-th summand of `i_inf`: the Scott map `x |-> i_{n inf } comp x_{n+1} comp j_{ inf n}`, where `x_{n+1}` is
the `(n+1)`-st component of `x` in `D_inf`. As a map `D_inf -> [D_inf -> D_inf]` it
is the composite of the

```

```

component projection `j_{inf (n+1)}` with conjugation by `(i_{n inf }, j_{inf n})`. -/
noncomputable def iInfTerm (n : Nat) : ScottMap (DInf D_0 j_0) (DInfFn D_0 j_0) :=
  (conjMap (embInf (towerType D_0) (towerProj D_0 j_0) n)
    (projInf (towerType D_0) (towerProj D_0 j_0) n)).comp
    (projInf (towerType D_0) (towerProj D_0 j_0) (n + 1))

@[simp] theorem iInfTerm_apply (n : Nat) (x z : DInf D_0 j_0) :
  (iInfTerm D_0 j_0 n x) z
    = embInf (towerType D_0) (towerProj D_0 j_0) n
      ((x.1 (n + 1)) ((projInf (towerType D_0) (towerProj D_0 j_0) n) z)) := rfl

/-- **Scott 1972, S4 (Theorem 4.4).** The embedding `i_inf : D_inf -> [D_inf -> D_inf ]`,
`i_inf (x) = bigcup _n i_{n inf } comp x_{n+1} comp j_{inf n}`. It is Scott-continuous
because it is a supremum of the
Scott maps `iInfTerm n` (suprema in `[D_inf -> [D_inf -> D_inf ] ]` are computed
pointwise). -/
noncomputable def embInfInf : ScottMap (DInf D_0 j_0) (DInfFn D_0 j_0) :=
  bigcup _n, iInfTerm D_0 j_0 n

/-- `i_inf` evaluated at `x` is the pointwise supremum of the summands `iInfTerm n x`. -/
theorem embInfInf_apply (x : DInf D_0 j_0) :
  embInfInf D_0 j_0 x = bigcup _n, iInfTerm D_0 j_0 n x := by
  show (sSup (Set.range (iInfTerm D_0 j_0)) : ScottMap _ _) x = _
  rw [ScottMap.sSup_apply, <- Set.range_comp, sSup_range]
  rfl

/-- The `n`-th summand of `j_inf` : the Scott map `f |-> i_{(n+1) inf }(j_{inf n} comp f
comp i_{n inf })`. As a map
`[D_inf -> D_inf ] -> D_inf` it is conjugation by `(j_{inf n}, i_{n inf })` (landing
in `D_{n+1}`) followed by the
embedding `i_{(n+1) inf }`. -/
noncomputable def jInfTerm (n : Nat) : ScottMap (DInfFn D_0 j_0) (DInf D_0 j_0) :=
  (embInf (towerType D_0) (towerProj D_0 j_0) (n + 1)).comp
    (conjMap (projInf (towerType D_0) (towerProj D_0 j_0) n)
      (embInf (towerType D_0) (towerProj D_0 j_0) n))

@[simp] theorem jInfTerm_apply (n : Nat) (f : DInfFn D_0 j_0) :
  jInfTerm D_0 j_0 n f
    = embInf (towerType D_0) (towerProj D_0 j_0) (n + 1)
      (conjMap (projInf (towerType D_0) (towerProj D_0 j_0) n)
        (embInf (towerType D_0) (towerProj D_0 j_0) n) f) := rfl

/-- **Scott 1972, S4 (Theorem 4.4).** The projection `j_inf : [D_inf -> D_inf ] -> D_inf`,
`j_inf (f) = bigcup _n i_{(n+1) inf }(j_{inf n} comp f comp i_{n inf })`. Scott-
continuous as a supremum of the Scott maps
`jInfTerm n`. -/
noncomputable def projInfInf : ScottMap (DInfFn D_0 j_0) (DInf D_0 j_0) :=
  bigcup _n, jInfTerm D_0 j_0 n

/-- `j_inf` evaluated at `f` is the supremum of the summands `jInfTerm n f`. -/
theorem projInfInf_apply (f : DInfFn D_0 j_0) :
  projInfInf D_0 j_0 f = bigcup _n, jInfTerm D_0 j_0 n f := by
  show (sSup (Set.range (jInfTerm D_0 j_0)) : ScottMap _ _) f = _
  rw [ScottMap.sSup_apply, <- Set.range_comp, sSup_range]
  rfl

/-- `i_inf` is Scott-continuous (it is a bundled `ScottMap`). -/
theorem embInfInf_preservesDirectedSup :
  PreservesDirectedSup (embInfInf D_0 j_0 : DInf D_0 j_0 -> DInfFn D_0 j_0) :=
  (proposition_2_5 _).mp (embInfInf D_0 j_0).continuous

```

```

/-- `j_inf` is Scott-continuous (it is a bundled `ScottMap`). -/
theorem projInfInf_preservesDirectedSup :
  PreservesDirectedSup (projInfInf D_0 j_0 : DInfFn D_0 j_0 -> DInf D_0 j_0) :=
  (proposition_2_5 _).mp (projInfInf D_0 j_0).continuous

/-! ### Theorem 4.4(b): `j_inf` comp `i_inf` = id` on `D_inf`

Scott's calculation (~lines 1290-1294): expand `j_inf (i_inf (x))` as a double sup, collapse
the monotone
double limit to the diagonal using `projInf` comp `embInf` = id` on each summand, then recognize
`x` via
`inverseLimit_eq_iSup` (with a one-step index shift). -/

section Thm44b

variable (D_0 : CLat.{u})
(j_0 : IsContinuousLatticeProjection D_0.carrier (ScottMap D_0.carrier D_0.carrier))

/-- Conjugation commutes with a supremum indexed by `Nat` (the range is directed when `f` is
monotone).
Since `conjMap post pre` is itself a Scott map, this is just preservation of directed suprema.
-/
theorem conjMap_iSup (n : Nat) (post : ScottMap (DInf D_0 j_0) (towerType D_0 n))
  (pre : ScottMap (towerType D_0 n) (DInf D_0 j_0))
  (f : Nat -> ScottMap (DInf D_0 j_0) (DInf D_0 j_0)) (hf : Monotone f) :
  conjMap post pre (bigcup m, f m) = bigcup m, conjMap post pre (f m) := by
  have hdir : DirectedOn (* <= *) (Set.range f) :=
    directedOn_range.2 fun a b => <max a b, hf (le_max_left a b), hf (le_max_right a b)>
  have hne := Set.range_nonempty f
  rw [show (bigcup m, f m) = sSup (Set.range f) from sSup_range.symm,
    (conjMap post pre).preservesDirectedSup_coe (Set.range f) hne hdir, <- Set.range_comp]
  rfl

/-- The inverse-limit embedding commutes with a supremum in `D_{n+1}` (monotone => directed).
-/
theorem embInf_succ_iSup (n : Nat) (f : Nat -> towerType D_0 (n + 1)) (hf : Monotone f) :
  embInf (towerType D_0) (towerProj D_0 j_0) (n + 1) (bigcup m, f m) =
  bigcup m, embInf (towerType D_0) (towerProj D_0 j_0) (n + 1) (f m) := by
  have hdir : DirectedOn (* <= *) (Set.range f) :=
    directedOn_range.2 fun a b => <max a b, hf (le_max_left a b), hf (le_max_right a b)>
  have hne := Set.range_nonempty f
  rw [show (bigcup m, f m) = sSup (Set.range f) from sSup_range.symm,
    (embInf (towerType D_0) (towerProj D_0 j_0) (n + 1)).preservesDirectedSup_coe
    (Set.range f) hne hdir, <- Set.range_comp]
  rfl

/-- **Diagonal simplification.** `conjMap (j_{inf n}, i_{n inf})` applied to the `n`-th
summand of `i_inf`
recovers the component `x_{n+1}`. This is exactly `j_{[*]}` comp `i_{[*]}` = id` for the
function-space
projection built from `proposition_4_2`. -/
theorem conj_iInfTerm_eq (n : Nat) (x : DInf D_0 j_0) :
  conjMap (projInf (towerType D_0) (towerProj D_0 j_0) n)
  (embInf (towerType D_0) (towerProj D_0 j_0) n)
  (iInfTerm D_0 j_0 n x) = x.1 (n + 1) :=
  (proposition_4_2 (towerType D_0) (towerProj D_0 j_0) n).functionSpace.retr_incl
  (projInf (towerType D_0) (towerProj D_0 j_0) (n + 1) x)

/-- `i_{n inf} (y_n)` sqsub `y_{n+1}`: climbing one level and embedding stays below the next
component. -/
theorem incl_projInf_le_projInf_succ (n : Nat) (w : DInf D_0 j_0) :
  (towerProj D_0 j_0 n).incl (projInf (towerType D_0) (towerProj D_0 j_0) n w)
  <= projInf (towerType D_0) (towerProj D_0 j_0) (n + 1) w := by

```

```

have h := (towerProj D_0 j_0 n).incl_retr_le
  (projInf (towerType D_0) (towerProj D_0 j_0) (n + 1) w)
rwa [show (towerProj D_0 j_0 n).retr (projInf (towerType D_0) (towerProj D_0 j_0) (n + 1) w)
  = projInf (towerType D_0) (towerProj D_0 j_0) n w from w.2 n] at h

/-- `i_inf` is monotone in its summand index. -/
theorem iInfTerm_le_succ (x : DInf D_0 j_0) (m : Nat) :
  iInfTerm D_0 j_0 m x <= iInfTerm D_0 j_0 (m + 1) x := by
  rw [ScottMap.le_def]
  intro z
  rw [iInfTerm_apply, iInfTerm_apply,
    <- embInf_succ (towerType D_0) (towerProj D_0 j_0) m
      (x.1 (m + 1) (projInf (towerType D_0) (towerProj D_0 j_0) m z))]]
  refine embInf_monotone (towerType D_0) (towerProj D_0 j_0) (m + 1) ?_
  have hab : (towerProj D_0 j_0 m).incl (projInf (towerType D_0) (towerProj D_0 j_0) m z)
    <= projInf (towerType D_0) (towerProj D_0 j_0) (m + 1) z :=
    incl_projInf_le_projInf_succ D_0 j_0 m z
  calc (towerProj D_0 j_0 m).incl
    (x.1 (m + 1) (projInf (towerType D_0) (towerProj D_0 j_0) m z))
  = (towerProj D_0 j_0 m).incl
    (((towerProj D_0 j_0 (m + 1)).retr (x.1 (m + 2))))
    (projInf (towerType D_0) (towerProj D_0 j_0) m z)) := by
    rw [show ((towerProj D_0 j_0 (m + 1)).retr (x.1 (m + 2))) = x.1 (m + 1) from x.2 (m +
      1)]
  _ = (towerProj D_0 j_0 m).incl
    ((towerProj D_0 j_0 m).retr
      (x.1 (m + 2) ((towerProj D_0 j_0 m).incl
        (projInf (towerType D_0) (towerProj D_0 j_0) m z))))) := by
    rw [towerProj_succ_retr_apply]
  _ <= x.1 (m + 2) ((towerProj D_0 j_0 m).incl
    (projInf (towerType D_0) (towerProj D_0 j_0) m z)) :=
    (towerProj D_0 j_0 m).incl_retr_le _
  _ <= x.1 (m + 2) (projInf (towerType D_0) (towerProj D_0 j_0) (m + 1) z) :=
    ScottMap.monotone (x.1 (m + 2)) hab

theorem iInfTerm_monotone (x : DInf D_0 j_0) : Monotone (fun m => iInfTerm D_0 j_0 m x) :=
  monotone_nat_of_le_succ (iInfTerm_le_succ D_0 j_0 x)

/-- A monotone double `iSup` over `Nat x Nat` equals the diagonal `iSup`. -/
theorem iSup_2_monotone_eq_diagonal {a : Type*} [CompleteLattice a] (f : Nat -> Nat -> a)
  (hfm : forall n, Monotone (f n)) (hfn : forall m, Monotone (fun n => f n m)) :
  bigcup n, bigcup m, f n m = bigcup n, f n n := by
  apply le_antisymm
  * refine iSup_le fun n => iSup_le fun m => ?_
    have hk : n <= n sqsup m := le_sup_left
    have hk' : m <= n sqsup m := le_sup_right
    calc f n m <= f (n sqsup m) m := hfn m hk
      _ <= f (n sqsup m) (n sqsup m) := hfm (n sqsup m) hk'
      _ <= bigcup n', f n' n' := le_iSup (fun n' => f n' n') (n sqsup m)
  * refine iSup_le fun n => le_trans (le_iSup (f n) n) (le_iSup (fun n' => bigcup m, f n' m)
    n)

/-- **Conjugation climbs the tower (one step). ** Lifting `conjMap (j_{inf n}, i_{n inf }) f`
  along `i_{n+1}`
  stays below `conjMap (j_{inf (n+1)}, i_{(n+1) inf }) f`. Both sides live in `D_{n+2}`; the
  inequality is the
  algebraic content that makes the double sup defining `j_inf` comp `i_inf` monotone in the
  level index `n`. -/
theorem conjMap_incl_le_conjMap_succ (n : Nat) (f : DInfFn D_0 j_0) :
  (towerProj D_0 j_0 (n + 1)).incl
    (conjMap (projInf (towerType D_0) (towerProj D_0 j_0) n)
      (embInf (towerType D_0) (towerProj D_0 j_0) n) f)
  <= conjMap (projInf (towerType D_0) (towerProj D_0 j_0) (n + 1))

```



```

      (embInf (towerType D_0) (towerProj D_0 j_0) (n + 1)) f := by
refine ScottMap.le_def.mpr fun y => ?_
calc (towerProj D_0 j_0 n).incl
  (projInf (towerType D_0) (towerProj D_0 j_0) n
    (f (embInf (towerType D_0) (towerProj D_0 j_0) n ((towerProj D_0 j_0 n).retr y))))
<= (towerProj D_0 j_0 n).incl
  (projInf (towerType D_0) (towerProj D_0 j_0) n
    (f (embInf (towerType D_0) (towerProj D_0 j_0) (n + 1) y))) := by
refine (towerProj D_0 j_0 n).incl.monotone
  ((projInf (towerType D_0) (towerProj D_0 j_0) n).monotone (f.monotone ?_))
rw [← embInf_succ (towerType D_0) (towerProj D_0 j_0) n ((towerProj D_0 j_0 n).retr
y)]
  exact embInf_monotone (towerType D_0) (towerProj D_0 j_0) (n + 1)
    ((towerProj D_0 j_0 n).incl_retr_le y)
_ <= projInf (towerType D_0) (towerProj D_0 j_0) (n + 1)
  (f (embInf (towerType D_0) (towerProj D_0 j_0) (n + 1) y)) :=
incl_projInf_le_projInf_succ D_0 j_0 n
  (f (embInf (towerType D_0) (towerProj D_0 j_0) (n + 1) y))

/-- `j_inf (i_inf (x)) = bigcup _n i_{(n+1) inf }(x_{n+1})`. -/
theorem projInfInf_embInfInf_eq (x : DInf D_0 j_0) :
  projInfInf D_0 j_0 (embInfInf D_0 j_0 x) = bigcup _n, embInf (towerType D_0) (towerProj
D_0 j_0) (n + 1) (x.1 (n + 1)) := by
rw [projInfInf_apply]
set g := fun n m =>
  embInf (towerType D_0) (towerProj D_0 j_0) (n + 1)
  (conjMap (projInf (towerType D_0) (towerProj D_0 j_0) n)
    (embInf (towerType D_0) (towerProj D_0 j_0) n)
    (iInfTerm D_0 j_0 m x)) with hg
have hmono (n : Nat) : Monotone (fun m =>
  conjMap (projInf (towerType D_0) (towerProj D_0 j_0) n)
    (embInf (towerType D_0) (towerProj D_0 j_0) n)
    (iInfTerm D_0 j_0 m x)) := fun a b hab =>
  (conjMap (projInf (towerType D_0) (towerProj D_0 j_0) n)
    (embInf (towerType D_0) (towerProj D_0 j_0) n)).monotone

```

Lean 4 source (lines 401–639)

```

  (ScottMap.le_def.mpr (iInfTerm_monotone D_0 j_0 x hab))
have hinner (n : Nat) : jInfTerm D_0 j_0 n (embInfInf D_0 j_0 x) = bigcup _m, g n m :=
calc jInfTerm D_0 j_0 n (embInfInf D_0 j_0 x)
  = embInf (towerType D_0) (towerProj D_0 j_0) (n + 1)
    (bigcup _m, conjMap (projInf (towerType D_0) (towerProj D_0 j_0) n)
      (embInf (towerType D_0) (towerProj D_0 j_0) n)
      (iInfTerm D_0 j_0 m x)) := by
  rw [jInfTerm_apply, embInfInf_apply,
    conjMap_iSup D_0 j_0 n (projInf (towerType D_0) (towerProj D_0 j_0) n)
      (embInf (towerType D_0) (towerProj D_0 j_0) n)
      (fun m => iInfTerm D_0 j_0 m x) (iInfTerm_monotone D_0 j_0 x)]
  rfl
_ = bigcup _m, embInf (towerType D_0) (towerProj D_0 j_0) (n + 1)
  (conjMap (projInf (towerType D_0) (towerProj D_0 j_0) n)
    (embInf (towerType D_0) (towerProj D_0 j_0) n)
    (iInfTerm D_0 j_0 m x)) :=
  embInf_succ_iSup D_0 j_0 n _ (hmono n)
_ = bigcup _m, g n m := by simp only [hg]
have g_mono_m (n : Nat) : Monotone (g n) := by
  intro a b hab
  rw [hg]
  exact (embInf (towerType D_0) (towerProj D_0 j_0) (n + 1)).monotone
    ((conjMap (projInf (towerType D_0) (towerProj D_0 j_0) n)
      (embInf (towerType D_0) (towerProj D_0 j_0) n)).monotone
      (ScottMap.le_def.mpr (iInfTerm_monotone D_0 j_0 x hab)))
have g_mono_n_succ (m n : Nat) : g n m <= g (n + 1) m := by

```

```

    rw [hg]
    dsimp only
    rw [ <- embInf_succ (towerType D_0) (towerProj D_0 j_0) (n + 1)
          (conjMap (projInf (towerType D_0) (towerProj D_0 j_0) n)
                    (embInf (towerType D_0) (towerProj D_0 j_0) n)
                    (iInfTerm D_0 j_0 m x))]
    exact embInf_monotone (towerType D_0) (towerProj D_0 j_0) (n + 2)
    (conjMap_incl_le_conjMap_succ D_0 j_0 n (iInfTerm D_0 j_0 m x))
  have g_mono_n (m : Nat) : Monotone (fun n => g n m) :=
    monotone_nat_of_le_succ (g_mono_n_succ m)
  have hin : (bigcup n, jInfTerm D_0 j_0 n (embInfInf D_0 j_0 x)) = bigcup n, bigcup m, g
    n m := by
    congr 1
    funext n
    exact hinner n
  rw [hin, iSup_2_monotone_eq_diagonal g g_mono_m g_mono_n]
  congr 1
  funext n
  rw [hg]
  dsimp only
  rw [conj_iInfTerm_eq D_0 j_0 n x]

/-- **Scott 1972, S4 (Theorem 4.4, first half).** `j_inf comp i_inf = id` on `D_inf`.
-/
theorem projInfInf_comp_embInfInf :
  (projInfInf D_0 j_0).comp (embInfInf D_0 j_0) = ScottMap.idMap := by
  apply ScottMap.ext
  intro x
  have hmono : Monotone (fun k => embInf (towerType D_0) (towerProj D_0 j_0) k (x.1 k)) :=
    monotone_nat_of_le_succ (embInf_le_succ (towerType D_0) (towerProj D_0 j_0) x)
  rw [ScottMap.comp_apply, ScottMap.idMap_apply, projInfInf_embInfInf_eq D_0 j_0 x,
      Monotone.iSup_nat_add hmono 1]
  exact (inverseLimit_eq_iSup (towerType D_0) (towerProj D_0 j_0) x).symm

/-! ### Theorem 4.4(c): `i_inf comp j_inf = id` on `[D_inf -> D_inf]`

This is the converse half (Scott ~lines 1322-1335). The restrictions
`u_n = j_{inf n} comp f comp i_{n inf}` in `D_{n+1}` satisfy the Lemma-4.5 recursion `j_{n+1}(u_{n+2}) = u_{n+1}`
(`towerProj_retr_conjMap_succ`), so Lemma 4.5 identifies the components of `j_inf (f)`.
Expanding
`i_inf (j_inf (f))` then yields the approximation `bigcup_n r_n comp f comp r_n` with `
r_n = i_{n inf} comp j_{inf n}`, and the
functional equation `id = bigcup_n r_n` (via `inverseLimit_eq_iSup`) plus continuity of `f`
collapse this
to `f`. -/

/-- **Step 1 (Lemma-4.5 recursion).** `j_{n+1}(j_{inf (n+1)} comp f comp i_{(n+1) inf}) =
j_{inf n} comp f comp i_{n inf}`.
This is the equality counterpart of `conjMap_incl_le_conjMap_succ`; it is the hypothesis Lemma
4.5
needs to recognize `j_inf (f)` from its restrictions. -/
theorem towerProj_retr_conjMap_succ (n : Nat) (f : DInfFn D_0 j_0) :
  (towerProj D_0 j_0 (n + 1)).retr
    (conjMap (projInf (towerType D_0) (towerProj D_0 j_0) (n + 1))
              (embInf (towerType D_0) (towerProj D_0 j_0) (n + 1)) f)
  = conjMap (projInf (towerType D_0) (towerProj D_0 j_0) n)
            (embInf (towerType D_0) (towerProj D_0 j_0) n) f := by
  apply ScottMap.ext
  intro y
  show (towerProj D_0 j_0 n).retr
    (projInf (towerType D_0) (towerProj D_0 j_0) (n + 1)
      (f (embInf (towerType D_0) (towerProj D_0 j_0) (n + 1))

```

```

      ((towerProj D_0 j_0 n).incl y)))
    = projInf (towerType D_0) (towerProj D_0 j_0) n
      (f (embInf (towerType D_0) (towerProj D_0 j_0) n y))
    rw [embInf_succ (towerType D_0) (towerProj D_0 j_0) n y]
    exact (f (embInf (towerType D_0) (towerProj D_0 j_0) n y)).2 n

/-- **Scott 1972, S4 (Theorem 4.4, second half).** `i_ inf comp j_ inf = id` on `[D_ inf
    -> D_ inf ]`. -/
theorem embInfInf_comp_projInfInf :
  (embInfInf D_0 j_0).comp (projInfInf D_0 j_0) = ScottMap.idMap := by
  apply ScottMap.ext
  intro f
  rw [ScottMap.comp_apply, ScottMap.idMap_apply]
  apply ScottMap.ext
  intro z
  -- `r_n = i_{n inf } comp j_{ inf n}`, the Proposition-4.2 approximation of the identity on
  -- `D_ inf`.
  set r : Nat -> ScottMap (DInf D_0 j_0) (DInf D_0 j_0) :=
    fun n => (embInf (towerType D_0) (towerProj D_0 j_0) n).comp
      (projInf (towerType D_0) (towerProj D_0 j_0) n) with hr
  have hrw : forall n (w : DInf D_0 j_0), r n w
    = embInf (towerType D_0) (towerProj D_0 j_0) n
      (projInf (towerType D_0) (towerProj D_0 j_0) n w) := by
    intro n w
    simp only [hr, ScottMap.comp_apply]
  have hr_mono : forall (w : DInf D_0 j_0), Monotone (fun m => r m w) := by
    intro w
    refine monotone_nat_of_le_succ (fun m => ?_)
    show r m w <= r (m + 1) w
    rw [hrw, hrw]
    exact embInf_le_succ (towerType D_0) (towerProj D_0 j_0) w m
  -- The functional equation `id = bigcup_n r_n` (remark following Proposition 4.2),
  -- pointwise.
  have hA : forall (w : DInf D_0 j_0), w = bigcup m, r m w := by
    intro w
    have h1 : (bigcup m, r m w)
      = bigcup m, embInf (towerType D_0) (towerProj D_0 j_0) m
        (projInf (towerType D_0) (towerProj D_0 j_0) m w) :=
      iSup_congr (fun m => hrw m w)
    rw [h1]
    exact inverseLimit_eq_iSup (towerType D_0) (towerProj D_0 j_0) w
  -- Evaluating a supremum of Scott maps `D_ inf -> D_ inf` at a point is pointwise.
  have hsup_apply : forall (g : Nat -> ScottMap (DInf D_0 j_0) (DInf D_0 j_0)) (w : DInf D_0
    j_0),
    (bigcup n, g n) w = bigcup n, g n w := by
    intro g w
    rw [show (bigcup n, g n) = sSup (Set.range g) from sSup_range.symm,
      ScottMap.sSup_apply, <- Set.range_comp, sSup_range]
    rfl
  -- A Scott map commutes with a monotone `Nat`-indexed supremum.
  have hcont : forall (g : ScottMap (DInf D_0 j_0) (DInf D_0 j_0)) (a : Nat -> DInf D_0 j_0)
    ,
    Monotone a -> g (bigcup m, a m) = bigcup m, g (a m) := by
    intro g a ha
    have hdir : DirectedOn (* <= *) (Set.range a) :=
      directedOn_range.2 fun i j => <max i j, ha (le_max_left i j), ha (le_max_right i j)>
    rw [show (bigcup m, a m) = sSup (Set.range a) from sSup_range.symm,
      g.preservesDirectedSup_coe (Set.range a) (Set.range_nonempty a) hdir,
      <- Set.range_comp, sSup_range]
    rfl
  -- `j_ inf (f) = bigcup ? i_{(k+1) inf } (j_{ inf k} comp f comp i_{k inf })`.
  have hpi : projInfInf D_0 j_0 f
    = bigcup k, embInf (towerType D_0) (towerProj D_0 j_0) (k + 1)

```

```

      (conjMap (projInf (towerType D_0) (towerProj D_0 j_0) k)
        (embInf (towerType D_0) (towerProj D_0 j_0) k) f) := by
    rw [projInfInf_apply]
    exact iSup_congr (fun n => jInfTerm_apply D_0 j_0 n f)
-- Lemma 4.5: the `(n+1)`-st component of `j_ inf (f)` is the restriction `j_{ inf n} comp
  f comp i_{n inf}`.
have hcoord : forall n, (projInfInf D_0 j_0 f).1 (n + 1)
  = conjMap (projInf (towerType D_0) (towerProj D_0 j_0) n)
    (embInf (towerType D_0) (towerProj D_0 j_0) n) f := by
  intro n
  rw [hpi]
  exact lemma_4_5 (towerType D_0) (towerProj D_0 j_0)
    (fun k => conjMap (projInf (towerType D_0) (towerProj D_0 j_0) k)
      (embInf (towerType D_0) (towerProj D_0 j_0) k) f)
    (fun m => towerProj_retr_conjMap_succ D_0 j_0 m f) n
-- Evaluate `i_ inf (j_ inf (f))` pointwise as a sup of summands.
have hev : embInfInf D_0 j_0 (projInfInf D_0 j_0 f) z
  = bigcup n, (iInfTerm D_0 j_0 n (projInfInf D_0 j_0 f)) z := by
  rw [embInfInf_apply]
  exact hsup_apply (fun n => iInfTerm D_0 j_0 n (projInfInf D_0 j_0 f)) z
-- Each summand is `r_n (f (r_n z))` (using `hcoord` and `conjMap`).
have hterm : forall n, (iInfTerm D_0 j_0 n (projInfInf D_0 j_0 f)) z = r n (f (r n z)) := by
  intro n
  rw [hrw, hrw, iInfTerm_apply, hcoord n]
  rfl
have hmono_frz : Monotone (fun m => f (r m z)) :=
  fun a b hab => f.monotone (hr_mono z hab)
have hfm : forall n, Monotone (fun m => r n (f (r m z))) :=
  fun n _ hab => (r n).monotone (f.monotone (hr_mono z hab))
have hfn : forall m, Monotone (fun n => r n (f (r m z))) :=
  fun m => hr_mono (f (r m z))
-- The analytic step (Scott ~1326-1334): confine the lub via continuity of `f`, then collapse
  the
-- monotone double sup to its diagonal.
have hfz : f z = bigcup n, r n (f (r n z)) :=
  calc f z = bigcup k, r k (f z) := hA (f z)
  _ = bigcup k, r k (f (bigcup m, r m z)) := by
    refine iSup_congr (fun k => ?_)
    rw [ <- hA z]
  _ = bigcup k, r k (bigcup m, f (r m z)) := by
    refine iSup_congr (fun k => ?_)
    rw [hcont f (fun m => r m z) (hr_mono z)]
  _ = bigcup k, bigcup m, r k (f (r m z)) :=
    iSup_congr (fun k => hcont (r k) (fun m => f (r m z)) hmono_frz)
  _ = bigcup n, r n (f (r n z)) :=
    iSup_2_monotone_eq_diagonal (fun n m => r n (f (r m z))) hfm hfn
calc embInfInf D_0 j_0 (projInfInf D_0 j_0 f) z
  = bigcup n, (iInfTerm D_0 j_0 n (projInfInf D_0 j_0 f)) z := hev
  _ = bigcup n, r n (f (r n z)) := iSup_congr hterm
  _ = f z := hfz.symm

```

end Thm44b

/-! ### Theorem 4.4(d): capstone `D\_ inf ~=[D\_ inf -> D\_ inf ]`

Package the mutually-inverse Scott maps from (b) and (c). Scott's homeomorphism follows because
`i\_ inf` and `j\_ inf` are Scott-continuous (`embInfInf` / `projInfInf` are bundled `ScottMap`s). -/

section Thm44d

```

variable (D_0 : CLat.{u})
(j_0 : IsContinuousLatticeProjection D_0.carrier (ScottMap D_0.carrier D_0.carrier))

```

```

theorem projInfInf_embInfInf (x : DInf D_0 j_0) :
  projInfInf D_0 j_0 (embInfInf D_0 j_0 x) = x := by
  have h := congrArg (fun g => g x) (projInfInf_comp_embInfInf D_0 j_0)
  simpa [ScottMap.comp_apply, ScottMap.idMap_apply] using h

theorem embInfInf_projInfInf (f : DInfFn D_0 j_0) :
  embInfInf D_0 j_0 (projInfInf D_0 j_0 f) = f := by
  have h := congrArg (fun g => g f) (embInfInf_comp_projInfInf D_0 j_0)
  simpa [ScottMap.comp_apply, ScottMap.idMap_apply] using h

theorem embInfInf_le_iff (x y : DInf D_0 j_0) :
  embInfInf D_0 j_0 x <= embInfInf D_0 j_0 y <-> x <= y := by
  constructor
  * intro h
  have := (projInfInf D_0 j_0).monotone h
  rwa [projInfInf_embInfInf, projInfInf_embInfInf] at this
  * intro h; exact (embInfInf D_0 j_0).monotone h

/-- **Scott 1972, S4 (Theorem 4.4).** The inverse limit `D_ inf ` of the function-space tower
  is
  order-isomorphic to its own function space `[D_ inf  ->  D_ inf ]` via the mutually-inverse
  Scott maps
  `i_ inf  = embInfInf` and `j_ inf  = projInfInf`. -/
theorem theorem_4_4 :
  (projInfInf D_0 j_0).comp (embInfInf D_0 j_0) = ScottMap.idMap /\
  (embInfInf D_0 j_0).comp (projInfInf D_0 j_0) = ScottMap.idMap :=
  <projInfInf_comp_embInfInf D_0 j_0, embInfInf_comp_projInfInf D_0 j_0>

/-- The order isomorphism `D_ inf  ?o [D_ inf  ->  D_ inf ]` witnessing Theorem 4.4. Both
  directions are
  Scott-continuous (they are bundled `ScottMap`s), so this is the order-theoretic half of Scott's
  homeomorphism. -/
noncomputable def theorem_4_4_orderIso : OrderIso (DInf D_0 j_0) (DInfFn D_0 j_0) :=
  (Equiv.mk (embInfInf D_0 j_0) (projInfInf D_0 j_0)
    (projInfInf_embInfInf D_0 j_0) (embInfInf_projInfInf D_0 j_0)).toOrderIso
    (embInfInf D_0 j_0).monotone (projInfInf D_0 j_0).monotone

end Thm44d

end LimitMaps

end Scott1972.ContinuousLattice

```

A.4 vendor/scott1972/Scott1972/ContinuousLattice/FunctionSpaces.lean

1633 lines.

Lean 4 source (lines 1–400)

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
Github: https://github.com/catskillsresearch/scott1972
-/

import Scott1972.ContinuousLattice.ScottMaps
import Mathlib.Data.Finset.Lattice.Fold
import Mathlib.Topology.ContinuousMap.Basic
import Mathlib.Topology.Order
import Mathlib.Order.CompleteLattice.Basic
import Mathlib.Order.FixedPoints

```

```

/-!
# Function spaces on continuous lattices (Scott 1972, S3)

Scott's S3 studies spaces of continuous maps  $[X \rightarrow Y]$  with the topology of pointwise
convergence (subbasic sets  $\{f \mid f x \text{ in } U\}$ ), the pointwise specialization order (3.2),
and the fact that  $[D \rightarrow D']$  is a continuous lattice when  $D \rightarrow D'$  is (3.3).

## March 1972 correction (Milner)

Scott's remark before Proposition 2.5 was mistaken: a  $T_0$ -topology on a complete lattice
need not have every open set Scott-open. The two extreme  $T_0$ -topologies inducing the same
order are generated by  $\{x \mid x \sqsubseteq_{\text{sub}} y\}$  (lower) and  $\{x \mid y \sqsubseteq_{\text{sub}} x\}$  (principal up-
sets).
The corrected proofs of 2.9, 2.10, and 3.3 assume the given topology is coarser than
the Scott (lattice) topology (scottTopologicalSpace <= tau in mathlib). We revisit that
hypothesis when formalizing those results.

In the March 1972 correction (p. 135), Scott writes  $\sqsup S'$  (prime on the index, not on the
join): for  $S \text{ subseq } D$  a subspace of ambient  $D'$ ,  $\sqsup S'$  is the supremum of  $S$ 
computed in  $D'$ ,
while  $\sqsup S$  is the supremum in the subspace  $D$ ; the retraction identity is  $j(\sqsup S')
= \sqsup S$ .
-/

namespace Scott1972.ContinuousLattice

open Set Topology TopologicalSpace

universe u v

variable {X Y D D' D'' D_0 D_0' D_1 D_1' : Type*}
variable [TopologicalSpace X] [TopologicalSpace Y]
variable [CompleteLattice D] [CompleteLattice D'] [CompleteLattice D'']
variable [CompleteLattice D_0] [CompleteLattice D_0'] [CompleteLattice D_1] [CompleteLattice
  D_1']

/-! ### Definition 3.1 -/

/-- Subbasic sets for Scott's function-space topology (pointwise convergence). -/
def scottFunctionEvalSubbasis (X Y : Type*) [TopologicalSpace X] [TopologicalSpace Y] :
  Set (Set (C(X, Y))) :=
  { W | exists (x : X) (U : Set Y), IsOpen U /\ W = {f : C(X, Y) | f x in U} }

/-- **Scott 1972, Definition 3.1.** The function space  $[X \rightarrow Y]$  carries the topology
generated by  $\{f \mid f x \text{ in } U \mid x \text{ in } X, U \text{ open in } Y\}$ . -/
@[reducible] noncomputable def scottFunctionTopology (X Y : Type*) [TopologicalSpace X]
  [TopologicalSpace Y] : TopologicalSpace (C(X, Y)) :=
  generateFrom (scottFunctionEvalSubbasis X Y)

/-- Scott's notation  $[X \rightarrow Y]$ : continuous maps with the pointwise (product) topology. -/
abbrev ScottFunctionSpace (X Y : Type*) [TopologicalSpace X] [TopologicalSpace Y] :=
  C(X, Y)

/-! ### Proposition 3.2 -/

theorem scottFunctionSubbasis_isOpen {x : X} {U : Set Y} (hU : IsOpen U) :
  @IsOpen (C(X, Y)) (scottFunctionTopology X Y) {f : C(X, Y) | f x in U} :=
  isOpen_generateFrom_of_mem (s := {f : C(X, Y) | f x in U}) <x, U, hU, rfl>

def specializationLe_generateOpen (f g : C(X, Y)) (hfg : forall x, SpecializationLe (f x) (g x))
  (V : Set (C(X, Y))) (hV : GenerateOpen (scottFunctionEvalSubbasis X Y) V) (hf : f in V) :

```

```

    g in V :=
match hV with
| .basic W hW => by
  obtain <x, U, hU, rfl> := hW
  exact hfg x U hU hf
| .univ => hf
| .inter s t hs ht => by
  rcases hf with <hfs, hft>
  exact Set.mem_inter (specializationLe_generateOpen f g hfg hs hfs)
    (specializationLe_generateOpen f g hfg ht hft)
| .sUnion S hS => by
  obtain <W, hWS, hfW> := Set.mem_sUnion.mp hf
  exact Set.mem_sUnion.mpr <W, hWS, specializationLe_generateOpen f g hfg (hS W hWS) hfW>

theorem scottFunctionSpecializationLe {f g : C(X, Y)} :
  letI := scottFunctionTopology X Y
  SpecializationLe f g <-> forall x, SpecializationLe (f x) (g x) := by
letI : TopologicalSpace (C(X, Y)) := scottFunctionTopology X Y
constructor
* intro hfg x U hU hfU
  exact hfg {h | h x in U} (scottFunctionSubbasis_isOpen (X := X) (Y := Y) hU) hfU
* intro hfg U hU hfU
  exact specializationLe_generateOpen f g hfg hU hfU

/-- **Scott 1972, Proposition 3.2.** The specialization order on `[X -> Y]` is pointwise. -/
theorem proposition_3_2 {f g : C(X, Y)} :
  letI := scottFunctionTopology X Y
  (SpecializationLe f g <-> forall x, SpecializationLe (f x) (g x)) :=
  scottFunctionSpecializationLe

/-! ### S3 on continuous lattices: pointwise lattice structure -/

/-- Continuous maps `D -> D'` with Scott topologies on domain and codomain. -/
abbrev ScottC (D D' : Type*) [CompleteLattice D] [CompleteLattice D'] :=
  @ContinuousMap D D' scottTopologicalSpace scottTopologicalSpace

/-- Continuous maps between complete lattices with Scott's induced topologies. -/
def ScottMap (D D' : Type*) [CompleteLattice D] [CompleteLattice D'] : Type _ :=
  { f : D -> D' // @Continuous D D' scottTopologicalSpace scottTopologicalSpace f }

namespace ScottMap

instance : CoeFun (ScottMap D D') (fun _ => D -> D') where
  coe f := f.1

@[ext]
theorem ext {f g : ScottMap D D'} (h : forall x, f x = g x) : f = g :=
  Subtype.ext (funext h)

theorem continuous (f : ScottMap D D') :
  @Continuous D D' scottTopologicalSpace scottTopologicalSpace f :=
  f.2

theorem preservesDirectedSup_coe (f : ScottMap D D') (S : Set D) (hS : S.Nonempty)
  (hSdir : DirectedOn (* <= *) S) :
  (f : D -> D') (sSup S) = sSup (Set.image (f : D -> D') S) := by
  have h := (proposition_2_5 (Subtype.val f)).mp f.property
  exact h hS hSdir

theorem monotone (f : ScottMap D D') : Monotone (f : D -> D') :=
  preservesDirectedSup_monotone ((proposition_2_5 (Subtype.val f)).mp f.property)

theorem preservesDirectedSup_comp {f : D' -> D''} {g : D -> D'} (hf : PreservesDirectedSup

```

```

f)
(hg : PreservesDirectedSup g) : PreservesDirectedSup (f comp g) := by
intro S hS hSdir
have hmono : Monotone g := preservesDirectedSup_monotone hg
have hdir' : DirectedOn (* <= *) (g '' S) := by
  intro p hp q hq
  obtain <a, ha, rfl> := hp
  obtain <b, hb, rfl> := hq
  obtain <c, hc, hac, hbc> := hSdir a ha b hb
  exact <g c, Set.mem_image_of_mem g hc, hmono hac, hmono hbc>
have hne : (g '' S).Nonempty := Set.image_nonempty.2 hS
rw [Function.comp_apply, hg hS hSdir, hf hne hdir']
congr 1
exact (Set.image_comp f g S).symm

def comp (f : ScottMap D' D'') (g : ScottMap D D') : ScottMap D D'' :=
<f comp g, continuous_of_preservesDirectedSup (preservesDirectedSup_comp
((proposition_2_5 (Subtype.val f)).mp f.property)
((proposition_2_5 (Subtype.val g)).mp g.property))>

def const (c : D') : ScottMap D D' :=
<fun _ => c, continuous_of_preservesDirectedSup fun S hS _ => by
  obtain <x, hx> := hS
  apply le_antisymm
  * exact le_sSup <x, hx, rfl>
  * apply sSup_le
    intro b hb
    obtain <y, hy, rfl> := hb
    exact le_rfl>

theorem pointwise_sup_preservesDirectedSup (f g : ScottMap D D') :
PreservesDirectedSup (fun x => f x sqsup g x) := by
intro S hS hSdir
show f (sSup S) sqsup g (sSup S) = sSup (Set.image (fun x => f x sqsup g x) S)
rw [f.preservesDirectedSup_coe S hS hSdir, g.preservesDirectedSup_coe S hS hSdir]
apply le_antisymm
* apply sup_le
  * apply sSup_le
    intro b hb
    obtain <s, hsS, rfl> := hb
    exact le_trans le_sup_left (le_sSup (Set.mem_image_of_mem (fun z => f z sqsup g z) hsS)
)
  * apply sSup_le
    intro b hb
    obtain <s, hsS, rfl> := hb
    exact le_trans le_sup_right (le_sSup (Set.mem_image_of_mem (fun z => f z sqsup g z) hsS)
))
* apply sSup_le
  intro b hb
  obtain <s, hsS, rfl> := hb
  exact sup_le (le_trans (le_sSup (Set.mem_image_of_mem f hsS)) le_sup_left)
    (le_trans (le_sSup (Set.mem_image_of_mem g hsS)) le_sup_right)

noncomputable def bot : ScottMap D D' :=
const False

def le (f g : ScottMap D D') : Prop :=
forall x, f x <= g x

noncomputable def sup (f g : ScottMap D D') : ScottMap D D' :=
<fun x => f x sqsup g x, continuous_of_preservesDirectedSup (
pointwise_sup_preservesDirectedSup f g)>

```



```

theorem pointwise_sSup_preservesDirectedSup (F : Set (ScottMap D D')) :
  PreservesDirectedSup (fun x => sSup (Set.image (fun f : ScottMap D D' => (f : D -> D') x) F)) := by
  intro S hS hSdir
  set H := fun x => sSup (Set.image (fun f : ScottMap D D' => (f : D -> D') x) F)
  show H (sSup S) = sSup (Set.image H S)
  apply le_antisymm
  * apply sSup_le
    intro b hb
    obtain <f, hfF, rfl> := hb
    change f (sSup S) <= sSup (Set.image H S)
    rw [f.preservesDirectedSup_coe S hS hSdir]
    apply sSup_le
    intro c hc
    obtain <s, hsS, rfl> := hc
    exact le_trans (le_sSup (Set.mem_image_of_mem (fun g : ScottMap D D' => (g : D -> D') s) hfF))
      (le_sSup (Set.mem_image_of_mem H hsS))
  * apply sSup_le
    intro b hb
    obtain <s, hsS, rfl> := hb
    apply sSup_le
    intro c hc
    obtain <f, hfF, rfl> := hc
    exact le_trans (ScottMap.monotone f (le_sSup hsS))
      (le_sSup (Set.mem_image_of_mem (fun g : ScottMap D D' => (g : D -> D') (sSup S)) hfF))

noncomputable def sSupMaps (F : Set (ScottMap D D')) : ScottMap D D' :=
  <fun x => sSup (Set.image (fun f : ScottMap D D' => (f : D -> D') x) F),
  continuous_of_preservesDirectedSup (pointwise_sSup_preservesDirectedSup F)>

theorem sSupMaps_apply (F : Set (ScottMap D D')) (x : D) :
  (sSupMaps F : D -> D') x =
  sSup (Set.image (fun f : ScottMap D D' => (f : D -> D') x) F) :=
  rfl

/-! ### The complete lattice `[D -> D']` (Theorem 3.3, order content)

The pointwise order makes `ScottMap D D'` a partial order; `sSupMaps` gives suprema (pointwise,
since directed and arbitrary suprema of Scott maps are computed pointwise -- Theorem 3.3). By
`completeLatticeOfSup` this is a complete lattice. Note infima are not pointwise (Scott's
warning); `completeLatticeOfSup` derives them as `sSup` of lower bounds. -/

instance instPartialOrder : PartialOrder (ScottMap D D') where
  le := ScottMap.le
  le_refl _ _ := le_refl _
  le_trans _ _ _ hfg hgh x := le_trans (hfg x) (hgh x)
  le_antisymm _ _ hfg hgf := ScottMap.ext fun x => le_antisymm (hfg x) (hgf x)

theorem le_def {f g : ScottMap D D'} : f <= g <-> forall x, (f : D -> D') x <= g x :=
  Iff.rfl

noncomputable instance instSupSet : SupSet (ScottMap D D') := <sSupMaps>

theorem sSup_apply (F : Set (ScottMap D D')) (x : D) :
  ((sSup F : ScottMap D D') : D -> D') x =
  sSup (Set.image (fun f : ScottMap D D' => (f : D -> D') x) F) :=
  rfl

theorem isLUB_sSup (F : Set (ScottMap D D')) : IsLUB F (sSup F) := by
  constructor
  * intro f hf
  rw [le_def]

```

```

    intro x
    rw [sSup_apply]
    exact le_sSup (Set.mem_image_of_mem _ hf)
* intro g hg
    rw [le_def]
    intro x
    rw [sSup_apply]
    refine sSup_le ?_
    rintro _ <f, hfF, rfl>
    exact (hg hfF) x

noncomputable instance instCompleteLattice : CompleteLattice (ScottMap D D') :=
  completeLatticeOfSup (ScottMap D D') isLUB_sSup

/-- The identity Scott map. -/
def idMap : ScottMap D D :=
  <fun x => x, continuous_of_preservesDirectedSup fun S _ => by
    show sSup S = sSup (Set.image (fun x => x) S)
    rw [Set.image_id]>

@[simp] theorem idMap_apply (x : D) : (idMap : ScottMap D D) x = x := rfl

@[simp] theorem comp_apply (f : ScottMap D' D'') (g : ScottMap D D') (x : D) :
  (f.comp g : D -> D'') x = f (g x) := rfl

/-- The (completeLatticeOfSup-derived) binary join of Scott maps is computed pointwise. -/
theorem sup_apply (f g : ScottMap D D') (x : D) :
  ((f sqsup g : ScottMap D D') : D -> D') x = f x sqsup g x := by
  have h : (f sqsup g : ScottMap D D') = sSup ({f, g} : Set (ScottMap D D')) := rfl
  rw [h, sSup_apply, Set.image_pair]
  exact sSup_pair

/-- The bottom Scott map is the constant `False`. -/
theorem bot_apply (x : D) : ((False : ScottMap D D') : D -> D') x = False := by
  have h : (False : ScottMap D D') = sSup ({ } : Set (ScottMap D D')) := rfl
  rw [h, sSup_apply, Set.image_empty, sSup_empty]

@[simp] theorem const_apply (c : D') (x : D) : (ScottMap.const c : D -> D') x = c := rfl

end ScottMap

/-! ### Theorem 3.3 (core) -/

/-- **Scott 1972, Theorem 3.3 (directed sup).** Pointwise suprema of Scott-continuous maps are
Scott-continuous; this is the heart of Scott's proof that  $[D \rightarrow D']$  is a complete lattice.
- /
noncomputable def theorem_3_3_sSup (F : Set (ScottMap D D')) : ScottMap D D' :=
  ScottMap.sSupMaps F

/-- **Scott 1972, Theorem 3.3 (binary join).** Pointwise join of Scott-continuous maps is
Scott-continuous. - /
noncomputable def theorem_3_3_sup (f g : ScottMap D D') : ScottMap D D' :=
  ScottMap.sup f g

/-! ### Theorem 3.3 ( $[D \rightarrow D']$  is a continuous lattice)

Scott's *step functions*  $e[e, e']$  are the building blocks:  $e[e, e'](x) = e$  if  $e \ll x$ ,
else
`False`. We encode the conditional value as  $\text{bigcup } _ : e \ll x, e$  (which is  $e$  when  $e \ll x$ 
and `False` otherwise), avoiding any decidability assumption. Each step function is Scott-continuous (the
way-above set  $\{x \mid e \ll x\}$  is Scott-open), is way below  $f$  whenever  $e \ll f e$ , and  $f$ 
is the
```

```

supremum of the step functions below it -- whence `[D -> D']` is a continuous lattice. -/

/-- The (value of the) step function `e[e, e']` at `x` is `e` if `e <= x`, else `False`. -/
noncomputable def stepFun (e : D) (e' : D') (x : D) : D' := bigcup _ : e <= x, e'

theorem stepFun_of_wayBelow {e : D} {e' : D'} {x : D} (h : e <= x) : stepFun e e' x = e' :=
  iSup_pos h

theorem stepFun_of_not_wayBelow {e : D} {e' : D'} {x : D} (h : not e <= x) :
  stepFun e e' x = False :=
  iSup_neg h

/-- Step functions are Scott-continuous: `{x | e <= x}` is Scott-open, so the conditional
commutes
with directed suprema. -/
theorem stepFun_preservesDirectedSup (e : D) (e' : D') :
  PreservesDirectedSup (stepFun e e') := by
  intro S hS hSdir
  show stepFun e e' (sSup S) = sSup (Set.image (stepFun e e') S)
  by_cases h : e <= sSup S
  * rw [stepFun_of_wayBelow h]
    obtain <s, hS, hSdir> := (scottOpen_wayBelow e).2 hS hSdir h
    apply le_antisymm
    * refine le_sSup_of_le (Set.mem_image_of_mem _ hS) ?_
      rw [stepFun_of_wayBelow hS]
    * refine sSup_le ?_
      rintro _ <x, _, rfl>
      exact iSup_le fun _ => le_rfl
  * rw [stepFun_of_not_wayBelow h]
    refine (sSup_eq_bot.2 ?_).symm
    rintro _ <x, hS, rfl>
    refine stepFun_of_not_wayBelow (fun hex => ?_)
    exact h (hex.trans_le (le_sSup hS))

/-- The step function `e[e, e']` as a Scott map. -/
noncomputable def stepMap (e : D) (e' : D') : ScottMap D D' :=
  <stepFun e e', continuous_of_preservesDirectedSup (stepFun_preservesDirectedSup e e')>

theorem stepMap_apply_of_wayBelow {e : D} {e' : D'} {x : D} (h : e <= x) :
  (stepMap e e' : D -> D') x = e' :=
  stepFun_of_wayBelow h

/-- If `e' <= g e` then the step function `e[e, e']` lies below `g` (a pointwise argument).
-/
theorem stepMap_le_of_wayBelow {e : D} {e' : D'} {g : ScottMap D D'}
  (h : e' <= (g : D -> D') e) : stepMap e e' <= g := by
  rw [ScottMap.le_def]
  intro x
  by_cases hex : e <= x
  * rw [stepMap_apply_of_wayBelow hex]
    exact h.le.trans (g.monotone hex.le)
  * show stepFun e e' x <= (g : D -> D') x
    rw [stepFun_of_not_wayBelow hex]
    exact bot_le

/-- **The step function is way below `f`.** If `e' <= f e`, then `e[e, e'] <= f` in `[D ->
D']`,
witnessed by the Scott-open set `{g | e' <= g e}` (open because suprema in `[D -> D']` are
pointwise
and `{* <= *}` is inaccessible by directed suprema). -/
theorem stepMap_wayBelow {e : D} {e' : D'} {f : ScottMap D D'}
  (he' : e' <= (f : D -> D') e) : stepMap e e' <= f := by
  refine <{g : ScottMap D D' | e' <= (g : D -> D') e}, <?_, ?_>, he', ?_>

```

```

* intro g g' hgg' hg
  exact hg.trans_le (hgg' e)
* intro F hFne hFdir hmem
  simp only [Set.mem_setOf_eq, ScottMap.sSup_apply] at hmem
  have hne : (Set.image (fun g : ScottMap D D' => (g : D -> D') e) F).Nonempty := hFne.
  image _
  have hdir : DirectedOn (* <= *) (Set.image (fun g : ScottMap D D' => (g : D -> D') e) F)
  := by
    rintro _ <a, ha, rfl> _ <b, hb, rfl>
    obtain <c, hc, hac, hbc> := hFdir a ha b hb
    exact <(c : D -> D') e, Set.mem_image_of_mem _ hc, hac e, hbc e>
  obtain <_, <g, hgF, rfl>, hg> := (wayBelow_sSup_iff hne hdir).1 hmem
  exact <g, hgF, hg>
* intro g hg
  exact Set.mem_Ici.2 (stepMap_le_of_wayBelow hg)

/-- **Pointwise reconstruction.** For a Scott map `f`, the supremum of the values of the step
functions below `f` recovers `f x`: `f x = sqsup {e' | exists e << x, e' << f e}`. Uses
continuity of `D`
(`x = sqsup {e | e << x}`), Scott-continuity of `f`, and continuity of `D`. -/
theorem stepMap_pointwise_sSup (hD : IsContinuousLattice D) (hD' : IsContinuousLattice D')
(f : ScottMap D D') (x : D) :
  sSup {e' : D' | exists e, e << x /\ e' << (f : D -> D') e} = (f : D -> D') x :=
  by
    apply le_antisymm
* refine sSup_le ?_
  rintro e' <e, hex, he'>
  exact he'.le.trans (f.monotone hex.le)
* rw [← hD'.sSup_wayBelow ((f : D -> D') x)]
  refine sSup_le ?_
  intro w hw
  have hfx : (f : D -> D') x = sSup (Set.image (f : D -> D') {e | e << x}) := by
    rw [← f.preservesDirectedSup_coe {e | e << x} <False, bot_wayBelow x> (
      directedOn_wayBelow x),
      hD.sSup_wayBelow x]
  rw [hfx] at hw
  have hne : (Set.image (f : D -> D') {e | e << x}).Nonempty := <f False, False,
    bot_wayBelow x, rfl>
  have hdir : DirectedOn (* <= *) (Set.image (f : D -> D') {e | e << x}) := by
    rintro _ <a, ha, rfl> _ <b, hb, rfl>
    obtain <c, hc, hac, hbc> := directedOn_wayBelow x a ha b hb
    exact <f c, Set.mem_image_of_mem _ hc, f.monotone hac, f.monotone hbc>
  obtain <_, <e, hex, rfl>, hwe> := (wayBelow_sSup_iff hne hdir).1 hw
  exact le_sSup <e, hex, hwe>

/-- **Scott 1972, Theorem 3.3 (order content).** If `D` and `D'` are continuous lattices, then
so
is `[D -> D']` under the pointwise order. Every `f` is the supremum of the step functions way
below
it: `f = sqsup {e[e,e'] | e' << f e}`, and each such step function is way below `f`. -/
theorem theorem_3_3_isContinuousLattice (hD : IsContinuousLattice D)
(hD' : IsContinuousLattice D') : IsContinuousLattice (ScottMap D D') := by
  intro f
  refine <fun h hh => hh.le, fun g hg => ?_>
  rw [ScottMap.le_def]
  intro x
  rw [← stepMap_pointwise_sSup hD hD' f x]
  refine sSup_le ?_
  rintro e' <e, hex, he'>
  have hle : stepMap e e' <= g := hg (stepMap_wayBelow he')
  have hx := (ScottMap.le_def.1 hle) x

```

```

rwa [stepMap_apply_of_wayBelow hex] at hx

/--! ### Theorem 3.3(b): the lattice topology = the topology of pointwise convergence

The Scott topology of the continuous lattice `[D -> D']` coincides with the product (
  pointwise
convergence) topology, whose subbasis is `{f | f x in U}` (`U` Scott-open in `D`). One
inclusion
(pointwise subseteq Scott) is immediate: each subbasic set is Scott-open in the lattice (
joins are
pointwise). The other (Scott subseteq pointwise) is Scott's argument via the `Up phi` basis
of a continuous
lattice: `phi <= g` forces `phi <= sqsup _i e[e_i, e_i]` for finitely many pairs with `e_i
' <= g e_i`, and the
finite intersection `?_i {h | e_i' <= h e_i}` is a pointwise-open neighbourhood of `g` inside
`Up phi`. -/

/-- A finite sup of elements way below `g` is way below `g`. -/
theorem wayBelow_finset_sup {? L : Type*} [CompleteLattice L] {s : Finset ?} {f : ? -> L} {g
: L}
(h : forall i in s, f i <= g) : s.sup f <= g :=
  Finset.sup_induction (p := fun a => a <= g) (bot_wayBelow g) (fun _ ha _ hb => ha.sup hb) h

/-- Subbasic sets of the pointwise (product) topology on `[D -> D']` : `{f | f x in U}` for
`U`
Scott-open in `D`. -/
def scottMapPointwiseSubbasis (D D' : Type*) [CompleteLattice D] [CompleteLattice D'] :
  Set (Set (ScottMap D D')) :=
  { W | exists (x : D) (U : Set D'),
    @IsOpen D' scottTopologicalSpace U /\ W = {f : ScottMap D D' | (f : D -> D') x in U
  } }

/-- **Scott 1972, Definition 3.1 (on lattices).** The topology of pointwise convergence on
`[D -> D']`. -/
@[reducible] noncomputable def scottMapPointwiseTopology (D D' : Type*)
  [CompleteLattice D] [CompleteLattice D'] : TopologicalSpace (ScottMap D D') :=
  generateFrom (scottMapPointwiseSubbasis D D')

theorem pointwiseSubbasic_isOpen (x : D) {U : Set D'} (hU : @IsOpen D' scottTopologicalSpace U)
:
  @IsOpen (ScottMap D D') (scottMapPointwiseTopology D D')
  {f : ScottMap D D' | (f : D -> D') x in U} :=
  isOpen_generateFrom_of_mem <x, U, hU, rfl>

/-- Each pointwise-subbasic set `{f | f x in U}` (`U` Scott-open) is Scott-open in the
lattice
`[D -> D']`, because suprema there are pointwise. This is the easy inclusion pointwise
subseteq Scott. -/
theorem pointwiseSubbasic_scottOpen (x : D) {U : Set D'} (hU : ScottOpen U) :
  ScottOpen {f : ScottMap D D' | (f : D -> D') x in U} := by
  refine <fun f f' hff' hf => hU.1 (hff' x) hf, fun F hFne hFdir hmem => ?_>
  simp only [Set.mem_setOf_eq, ScottMap.sSup_apply] at hmem
  have hne : (Set.image (fun g : ScottMap D D' => (g : D -> D') x) F).Nonempty := hFne.image
  -
  have hdir : DirectedOn (* <= *) (Set.image (fun g : ScottMap D D' => (g : D -> D') x) F)
  := by
    rintro _ <a, ha, rfl> _ <b, hb, rfl>
    obtain <c, hc, hac, hbc> := hFdir a ha b hb
    exact <(c : D -> D') x, Set.mem_image_of_mem _ hc, hac x, hbc x>
  obtain <_, <g, hgF, rfl>, hg> := hU.2 hne hdir hmem
  exact <g, hgF, hg>

/-- **Step-function decomposition of `phi <= g` in `[D -> D']`, then `phi`

```

```

    lies below a finite
join of step functions `e[e_i,e_i']` with `e_i' << g e_i`. The finite joins of such step
functions form
a directed family with supremum `g`, so `wayBelow_sSup_iff` produces one above `phi`. -/
theorem wayBelow_le_finset_sup_step (hD : IsContinuousLattice D) (hD' : IsContinuousLattice D')
  {phi g : ScottMap D D'} (h : phi << g) :
  exists F : Finset (D x D'), (forall p in F, (p.2 : D') << (g : D -> D') p.1) /\
  phi <= F.sup (fun p => stepMap p.1 p.2) := by
classical
set Sg : Set (ScottMap D D') :=
  (fun F : Finset (D x D') => F.sup (fun p => stepMap p.1 p.2)) ''
  {F | forall p in F, (p.2 : D') << (g : D -> D') p.1} with hSg
have hSgne : Sg.Nonempty := by
  refine <_, {}, ?_, rfl>
  intro p hp
  exact absurd hp (Finset.notMem_empty p)
have hSgdir : DirectedOn (* <= *) Sg := by
  rintro _ <F_1, hF_1, rfl> _ <F_2, hF_2, rfl>
  refine <(F_1 U F_2).sup (fun p => stepMap p.1 p.2), <F_1 U F_2, fun p hp => ?_, rfl>,
    Finset.sup_mono Finset.subset_union_left, Finset.sup_mono Finset.subset_union_right>
  rcases Finset.mem_union.1 hp with hp | hp
  * exact hF_1 p hp
  * exact hF_2 p hp
have hSgsup : sSup Sg = g := by
  apply le_antisymm
  * refine sSup_le ?_
    rintro _ <F, hF, rfl>
    exact Finset.sup_le fun p hp => stepMap_le_of_wayBelow (hF p hp)
  * rw [ScottMap.le_def]
    intro x
    rw [ <- stepMap_pointwise_sSup hD hD' g x]
    refine sSup_le ?_
    rintro e' <e, hex, he'>
    have hmemSg : stepMap e e' in Sg := by
      refine <{(e, e')}, fun p hp => ?_, ?_>
      * rw [Finset.mem_singleton] at hp; subst hp; exact he'
      * show ({(e, e')} : Finset (D x D')).sup (fun p => stepMap p.1 p.2) = stepMap e e'
        rw [Finset.sup_singleton]
    have hx : (stepMap e e' : D -> D') x <= ((sSup Sg : ScottMap D D') : D -> D') x :=
    by
      rw [ScottMap.sSup_apply]
      exact le_sSup <stepMap e e', hmemSg, rfl>
      rwa [stepMap_apply_of_wayBelow hex] at hx
  rw [ <- hSgsup] at h
obtain <_, <F, hF, rfl>, hphis> := (wayBelow_sSup_iff hSgne hSgdir).1 h
exact <F, hF, hphis.le>

/-- **Scott 1972, Theorem 3.3(b).** The Scott (lattice) topology on `[D -> D']` agrees with
the
topology of pointwise convergence. -/
theorem theorem_3_3_topology (hD : IsContinuousLattice D) (hD' : IsContinuousLattice D') :
  (scottTopologicalSpace : TopologicalSpace (ScottMap D D')) = scottMapPointwiseTopology D D'
  := by
have hL : IsContinuousLattice (ScottMap D D') := theorem_3_3_isContinuousLattice hD hD'
apply le_antisymm
* -- pointwise subseteq Scott: each subbasic set is Scott-open in the lattice
  apply le_generateFrom_iff_subset_isOpen.2
  rintro W <x, U, hUopen, rfl>
  exact isOpen_iff_scottOpen.mpr (pointwiseSubbasic_scottOpen x (isOpen_iff_scottOpen.mpr
    hUopen))
* -- Scott subseteq pointwise: each Scott-open lattice set is pointwise-open, via the `Up
phi` basis
  intro U hU

```

```

rw [isOpen_iff_scottOpen] at hU
rw [@isOpen_iff_forall_mem_open (ScottMap D D') (scottMapPointwiseTopology D D')]
intro g hgU
obtain <phi, hphiG, hphisub> := exists_wayBelow_subset hL hU hgU
obtain <F, hF, hphiF> := wayBelow_le_finset_sup_step hD hD' hphiG
refine <? p in F, {h : ScottMap D D' | (p.2 : D') << (h : D -> D') p.1}, ?, ?, ?>
* intro h hh
  refine hphisub (WayBelow.le_trans hphiF (wayBelow_finset_sup fun p hp => ?_))
  exact stepMap_wayBelow (Set.mem_iInter_2.1 hh p hp)
* exact @isOpen_biInter_finset (ScottMap D D') (D x D') (scottMapPointwiseTopology D D')
F _
  (fun p _ => pointwiseSubbasic_isOpen p.1 (isOpen_iff_scottOpen.mpr (scottOpen_wayBelow
p.2)))
* exact Set.mem_iInter_2.2 fun p hp => hF p hp

/-- **Scott 1972, Theorem 3.3 (full statement).** For continuous lattices `D`, `D'`, the
function
space `[D -> D']` is a continuous lattice (`theorem_3_3_isContinuousLattice`) whose Scott
topology
agrees with the topology of pointwise convergence (`theorem_3_3_topology`). -/
theorem theorem_3_3 (hD : IsContinuousLattice D) (hD' : IsContinuousLattice D') :
  IsContinuousLattice (ScottMap D D') /\
    (scottTopologicalSpace : TopologicalSpace (ScottMap D D')) = scottMapPointwiseTopology D
D' :=
  <theorem_3_3_isContinuousLattice hD hD', theorem_3_3_topology hD hD'>

/-! ### Corollary 3.4 -/

theorem scottFunctionSubbasis_isOpen_scott {x : D} {U : Set D'} (hU : @IsOpen D'
  scottTopologicalSpace U) :
  @IsOpen (ScottC D D') (@scottFunctionTopology D D' scottTopologicalSpace
  scottTopologicalSpace)
  {f : ScottC D D' | f x in U} :=
  isOpen_generateFrom_of_mem (s := {f : ScottC D D' | f x in U}) <x, U, hU, rfl>

theorem corollary_3_4_eval_on_C (x : D) :
  @Continuous (ScottC D D') D'
  (@scottFunctionTopology D D' scottTopologicalSpace scottTopologicalSpace)
  scottTopologicalSpace (fun f : ScottC D D' => f x) :=
  continuous_def.2 fun _U hU => scottFunctionSubbasis_isOpen_scott (D := D) (D' := D') (x := x)
  hU

/-- **Scott 1972, Corollary 3.4 (fixed `x`).** Evaluation at fixed `x` is continuous on `[D ->
D']`
(with Scott topologies on `D` and `D'`); this is one half of the separate-continuity input to
joint continuity. -/
theorem corollary_3_4 (x : D) :
  @Continuous (ScottC D D') D'
  (@scottFunctionTopology D D' scottTopologicalSpace scottTopologicalSpace)
  scottTopologicalSpace (fun f : ScottC D D' => f x) :=
  corollary_3_4_eval_on_C (D := D) (D' := D') x

/-- **Scott 1972, Corollary 3.4 (joint continuity, core).** Evaluation `[D -> D'] x D ->
D'`,
`(f, x) |-> f x`, preserves directed suprema. By Proposition 2.6 it suffices to check
separate
Scott-continuity: in `x` (with `f` fixed) it is `f`'s own continuity, and in `f` (with `x`
fixed)
it is the pointwise formula for suprema in `[D -> D']` (`ScottMap.sSup_apply`). -/
theorem corollary_3_4_preservesDirectedSup :
  PreservesDirectedSup (fun p : ScottMap D D' x D => (p.1 : D -> D') p.2) := by
  rw [proposition_2_6]
  constructor

```

```

* intro y S hS hSdir
  show ((sSup S : ScottMap D D') : D -> D') y
    = sSup ((fun x : ScottMap D D' => (x : D -> D') y) '' S)
  rw [ScottMap.sSup_apply]
* intro x
  exact (proposition_2_5 _).mp x.continuous

/-- **Scott 1972, Corollary 3.4.** The evaluation map `eval : [D -> D'] x D -> D'`, `(f,
x) |-> f x`,
is (jointly) Scott-continuous. Via Theorem 3.3(b) and Proposition 2.9(b) the Scott topology of
the
product lattice is the product of the pointwise topology on `[D -> D']` and the Scott
topology on
`D`, so this is exactly joint continuity for Scott's product topology. -/
theorem corollary_3_4_jointly_continuous :
  @Continuous (ScottMap D D' x D) D' scottTopologicalSpace scottTopologicalSpace
    (fun p : ScottMap D D' x D => (p.1 : D -> D') p.2) :=
  continuous_of_preservesDirectedSup corollary_3_4_preservesDirectedSup

/-! ### Proposition 3.5 (currying) -/

theorem sSup_image_prod_mk_left (x : D) (S : Set D') (hS : S.Nonempty) :
  sSup (Set.image (fun y => (x, y)) S) = (x, sSup S) := by
  have himage : Set.image (fun y => (x, y)) S = ({x} : Set D) x ? S := by
    ext <a, b>
    simp only [Set.mem_image, Set.mem_prod, Set.mem_singleton_iff]
    constructor
  * rintro <y, hy, h>
    obtain <ha, hb> := Prod.ext_iff.mp h
    subst hb
    exact <ha.sym, hy>
  * rintro <ha, hb>
    refine <b, hb, Prod.ext_iff.mpr <ha.sym, rfl>>
  have hx : sSup ({x} : Set D) = x := by
    apply le_antisymm
  * exact sSup_le fun z hz => by rw [Set.mem_singleton_iff] at hz; rw [hz]
  * exact le_sSup (Set.mem_singleton x)
  rw [himage, sSup_prod (hs := <x, Set.mem_singleton x>) (ht := hS), hx]

theorem curry_right_preservesDirectedSup (f : ScottMap (D x D') D'') (x : D) :
  PreservesDirectedSup (fun y => f (x, y)) := by
  intro S hS hSdir
  have hS' : DirectedOn (* <= *) (Set.image (fun y => (x, y)) S) := by
    intro p hp q hq
    obtain <a, ha, rfl> := hp
    obtain <b, hb, rfl> := hq
    obtain <c, hc, hac, hbc> := hSdir a ha b hb
    exact <(x, c), Set.mem_image_of_mem _ hc, And.intro (And.intro le_rfl hac) (And.intro
      le_rfl hbc)>
  have hS'ne : (Set.image (fun y => (x, y)) S).Nonempty := by
    obtain <s, hs> := hS
    exact <(x, s), s, hs, rfl>
  rw [show (fun y => f (x, y)) (sSup S) = f (x, sSup S) from rfl,
    <- sSup_image_prod_mk_left x S hS,
    f.preservesDirectedSup_coe (Set.image (fun y => (x, y)) S) hS'ne hS']
  congr 1
  simp [Set.image_image]

/-- **Scott 1972, Proposition 3.5 (right).** Currying in the `y`-variable is Scott-continuous.
-/
noncomputable def scottLambdaAt (f : ScottMap (D x D') D'') (x : D) : ScottMap D' D'' :=
  <fun y => f (x, y), continuous_of_preservesDirectedSup (curry_right_preservesDirectedSup f x)
  >

```



```

theorem sSup_image_prod_mk_right (y : D') (S : Set D) (hS : S.Nonempty) :
  sSup (Set.image (fun x => (x, y)) S) = (sSup S, y) := by
  have himage : Set.image (fun x => (x, y)) S = S × {y} : Set D' := by
    ext <a, b>
    simp only [Set.mem_image, Set.mem_prod, Set.mem_singleton_iff]
  constructor
  * rintro <x, hx, h>
    obtain <ha, hb> := Prod.ext_iff.mp h
    subst ha
    exact <hx, hb.symm>
  * rintro <ha, hb>
    exact <a, ha, Prod.ext_iff.mpr <rfl, hb.symm>>
  have hy : sSup ({y} : Set D') = y := by
    apply le_antisymm
  * exact sSup_le fun z hz => by rw [Set.mem_singleton_iff] at hz; rw [hz]
  * exact le_sSup (Set.mem_singleton y)
  rw [himage, sSup_prod (hs := hS) (ht := <y, Set.mem_singleton y>), hy]

/-- Currying in the `x`-variable: `x |-> f (x, y)` is Scott-continuous (used for continuity
of
`lambda f` as a map `D -> [D' -> D'']`). -/
theorem curry_left_preservesDirectedSup (f : ScottMap (D × D') D'') (y : D') :
  PreservesDirectedSup (fun x => f (x, y)) := by
  intro S hS hSdir
  have hS' : DirectedOn (* <= *) (Set.image (fun x => (x, y)) S) := by
    intro p hp q hq
    obtain <a, ha, rfl> := hp
    obtain <b, hb, rfl> := hq
    obtain <c, hc, hac, hbc> := hSdir a ha b hb
    exact <(c, y), Set.mem_image_of_mem _ hc, And.intro (And.intro hac le_rfl) (And.intro hbc
le_rfl)>
  have hS'ne : (Set.image (fun x => (x, y)) S).Nonempty := by
    obtain <s, hs> := hS
    exact <(s, y), s, hs, rfl>
  rw [show (fun x => f (x, y)) (sSup S) = f (sSup S, y) from rfl,
    <- sSup_image_prod_mk_right y S hS,
    f.preservesDirectedSup_coe (Set.image (fun x => (x, y)) S) hS'ne hS']
  congr 1
  simp [Set.image_image]

/-- The outer half of currying: `x |-> (y |-> f (x, y))` preserves directed suprema (so `
lambda f` is a
Scott map `D -> [D' -> D'']`). Equality in `[D' -> D'']` is pointwise, reducing to `
curry_left`. -/
theorem lambda_outer_preservesDirectedSup (f : ScottMap (D × D') D'') :
  PreservesDirectedSup (fun x => scottLambdaAt f x) := by
  intro S hS hSdir
  apply ScottMap.ext
  intro y
  show f (sSup S, y)
    = ((sSup (Set.image (fun x => scottLambdaAt f x) S) : ScottMap D' D'') : D' -> D'') y
  rw [ScottMap.sSup_apply, Set.image_image]
  exact curry_left_preservesDirectedSup f y hS hSdir

/-- **Scott 1972, Proposition 3.5.** Functional abstraction
`lambda : [[D × D'] -> D''] -> [D -> [D' -> D'']]`, `lambda f x y = f (x, y)`. By
Theorem 3.3,
`[D -> [D' -> D'']]` is itself a continuous lattice, and `lambda f` is a Scott map. -/
noncomputable def scottLambda (f : ScottMap (D × D') D'') : ScottMap D (ScottMap D' D'') :=
  <fun x => scottLambdaAt f x,
    continuous_of_preservesDirectedSup (lambda_outer_preservesDirectedSup f)>

```

```

@[simp] theorem scottLambda_apply (f : ScottMap (D x D') D'') (x : D) (y : D') :
  ((scottLambda f x : ScottMap D' D'') : D' -> D'') y = (f : (D x D') -> D'') (x, y) :=
  rfl

/-- `lambda` preserves directed suprema: both sides evaluate, pointwise at `(x, y)`, to
`sqsup {f (x, y) | f in ?}` , since suprema in every function lattice involved are pointwise
. -/
theorem proposition_3_5_preservesDirectedSup :
  PreservesDirectedSup
    (scottLambda : ScottMap (D x D') D'' -> ScottMap D (ScottMap D' D'')) := by
  intro ? h? h?dir
  apply ScottMap.ext
  intro x
  apply ScottMap.ext
  intro y
  rw [scottLambda_apply, ScottMap.sSup_apply, ScottMap.sSup_apply, ScottMap.sSup_apply,
    Set.image_image, Set.image_image]
  congr 1

/-- **Scott 1972, Proposition 3.5.** Functional abstraction `lambda` is Scott-continuous. -/
theorem proposition_3_5 :
  @Continuous (ScottMap (D x D') D'') (ScottMap D (ScottMap D' D''))
    scottTopologicalSpace scottTopologicalSpace scottLambda :=
  continuous_of_preservesDirectedSup proposition_3_5_preservesDirectedSup

/-! ### Definition 3.6 -/

/-- **Scott 1972, Definition 3.6.** A *retraction* of continuous lattices. -/
structure IsContinuousLatticeRetraction (D D' : Type*) [CompleteLattice D] [CompleteLattice D']
  where
  incl : ScottMap D D'
  retr : ScottMap D' D
  retr_incl : forall d, retr (incl d) = d

/-- **Scott 1972, Definition 3.6.** A *projection* of continuous lattices: a retract with
`i comp j sqsub id`. -/
structure IsContinuousLatticeProjection (D D' : Type*) [CompleteLattice D] [CompleteLattice D']
  extends IsContinuousLatticeRetraction D D' where
  incl_retr_le : forall d, incl (retr d) <= d

namespace IsContinuousLatticeRetraction

/-- **Scott 1972, Prop 2.10 / March 1972 correction (p. 135).** For `S subseteq D` a subspace
of
ambient `D`, write `sqsup S` for the supremum of `S` computed in `D` (Scott's prime is on
the
index, not the join). This is `sSup (i '' S)` in Lean. -/
noncomputable def ambientSSup (R : IsContinuousLatticeRetraction D D') (S : Set D) : D' :=
  sSup (Set.image (R.incl : D -> D') S)

/-- **Scott 1972, Prop 2.10 / March 1972 correction (p. 135).** For directed `S subseteq D`,
`j( sqsup S) = sqsup S` : the retraction sends the ambient join back to the subspace join. -/
theorem retr_ambientSSup_eq_sSup (R : IsContinuousLatticeRetraction D D') (S : Set D)
  (hS : S.Nonempty) (hdir : DirectedOn (* <= *) S) :
  R.retr (ambientSSup R S) = sSup S := by
  unfold ambientSSup
  have hdir' : DirectedOn (* <= *) (Set.image (R.incl : D -> D') S) := by
    intro p hp q hq
    obtain <a, ha, rfl> := hp
    obtain <b, hb, rfl> := hq
    obtain <c, hc, hac, hbc> := hdir a ha b hb
    exact <R.incl c, Set.mem_image_of_mem _ hc, R.incl.monotone hac, R.incl.monotone hbc>
  have hne' : (Set.image (R.incl : D -> D') S).Nonempty := Set.image_nonempty.2 hS

```

```

rw [R.retr.preservesDirectedSup_coe (Set.image (R.incl : D -> D') S) hne' hdir']
rw [Set.image_image, Set.image_congr fun a _ => R.retr_incl a]
simp [Set.image_id]

/-- The inclusion of a retraction preserves directed suprema (it is a Scott map). -/
theorem incl_preservesDirectedSup (R : IsContinuousLatticeRetraction D D') :
  PreservesDirectedSup (R.incl : D -> D') :=
  fun _ hS hSdir => R.incl.preservesDirectedSup_coe _ hS hSdir

/-- **Heart of Scott's proof of 2.10.** If  $x' \ll i(d)$  in the ambient continuous lattice  $D$ ,
then its image  $j(x')$  is way below  $d$  in the retract  $D'$ . The Scott-open witness in  $D$  is
the
preimage  $i^{-1}V$  of an ambient Scott-open witness  $V$  (Scott-open because  $i$  preserves
directed
suprema); for  $z$  in  $i^{-1}V$  we have  $x' \sqsubseteq i(z)$ , hence  $j(x') \sqsubseteq j(i(z)) = z$ . No
projection
hypothesis is needed --  $j \circ i = id$  and monotonicity suffice. -/
theorem retr_wayBelow_of_wayBelow_incl (R : IsContinuousLatticeRetraction D D')
  {d : D} {x' : D'} (hx' : x' << R.incl d) : R.retr x' << d := by
  obtain <U', hU'open, hd_in, hU'sub> := hx'
  refine <(R.incl : D -> D') ^-1' U', scottOpen_preimage R.incl_preservesDirectedSup hU'open,
    hd_in, fun z hz => ?_>
  have hle : x' <= R.incl z := Set.mem_Ici.1 (hU'sub hz)
  have hjle := R.retr.monotone hle
  rw [R.retr_incl z] at hjle
  exact Set.mem_Ici.2 hjle

/-- For  $d$  in the retract, the ambient way-below set of  $i(d)$  pushed back by  $j$  is a
directed
family whose supremum (computed in  $D'$ ) is  $d$ . This is the identity  $j(\sqsup S') = \sqsup S$ 
applied to
 $S = \{j(x') : x' \ll i(d)\}$ , combined with continuity of  $D'$ . -/
theorem sSup_image_retr_wayBelow (R : IsContinuousLatticeRetraction D D')
  (hD' : IsContinuousLattice D') (d : D) :
  sSup (Set.image (R.retr : D' -> D) {x' | x' << R.incl d}) = d := by
  have hne : ({x' : D' | x' << R.incl d}).Nonempty := <False, bot_wayBelow _>
  have hdir : DirectedOn (* <= *) {x' : D' | x' << R.incl d} := directedOn_wayBelow _
  rw [← R.retr.preservesDirectedSup_coe _ hne hdir, hD'.sSup_wayBelow (R.incl d), R.
    retr_incl d]

theorem image_retr_wayBelow_nonempty (R : IsContinuousLatticeRetraction D D') (d : D) :
  (Set.image (R.retr : D' -> D) {x' | x' << R.incl d}).Nonempty :=
  <R.retr False, False, bot_wayBelow _, rfl>

theorem image_retr_wayBelow_directed (R : IsContinuousLatticeRetraction D D') (d : D) :
  DirectedOn (* <= *) (Set.image (R.retr : D' -> D) {x' | x' << R.incl d}) := by
  rintro _ <a, ha, rfl> _ <b, hb, rfl>
  exact <R.retr (a sqsup b), <a sqsup b, WayBelow.sup ha hb, rfl>,
    R.retr.monotone le_sup_left, R.retr.monotone le_sup_right>

end IsContinuousLatticeRetraction

```

Lean 4 source (lines 801–1200)

```

/-! ### Proposition 2.10: a retract of a continuous lattice is a continuous lattice -/

/-- **Scott 1972, Proposition 2.10(a).** A (Scott-continuous) retract of a continuous lattice
is a
continuous lattice. For  $d$  in  $D'$  we have, in the ambient  $D$ ,  $i(d) = \sqsup \{x' \mid x' \ll i(d)\}$ ; applying
the retraction  $j$  (which preserves this directed supremum) gives  $d = \sqsup \{j(x') \mid x' \ll i(d)\}$  in

```

```

`D`, and each  $j(x') \ll d$  by retr_wayBelow_of_wayBelow_incl. Hence any upper bound of
 $\{x \mid x \ll d\}$  dominates  $d$ , so  $d = \text{sqsup } \{x \mid x \ll d\}$ . -/
theorem proposition_2_10_a (R : IsContinuousLatticeRetraction D D')
  (hD' : IsContinuousLattice D') : IsContinuousLattice D := by
  intro d
  refine <fun x hx => hx.le, fun b hb => ?_>
  rw [ <- R.sSup_image_retr_wayBelow hD' d]
  exact sSup.le fun _ <x', hx', hxeq> => hxeq |> hb (R.retr_wayBelow_of_wayBelow_incl hx')

/-- **Scott 1972, Proposition 2.10(b) (March 1972 / Milner correction).** The Scott topology of
the
retract  $D$  coincides with the subspace topology induced from the ambient  $D'$  along  $i$ .

* scott <= induced: each induced-open  $i^{-1}V$  is Scott-open in  $D$  because  $i$  is a Scott
map.
* induced <= scott: the sets  $i^{-1}(\text{Up } x') = \{z \mid x' \ll i(z)\}$  ( $x'$  in  $D'$ ) are a basis
of  $D$ 's Scott
topology -- given a Scott-open  $U \upharpoonright d$ , the directed family  $\{j(x') \mid x' \ll i(d)\}$  ( $\text{sup } d$ 
) meets
 $U$  at some  $j(x')$ , and  $i^{-1}(\text{Up } x') \text{ subseteq } U$  since  $x' \ll i(z) \Rightarrow j(x') \text{ sqsub } z$ 
with  $U$  upper. Each such
basic set is induced-open by construction, so every Scott-open of  $D$  is induced-open. -/
theorem proposition_2_10_b (R : IsContinuousLatticeRetraction D D')
  (hD' : IsContinuousLattice D') :
  (scottTopologicalSpace : TopologicalSpace D) =
  TopologicalSpace.induced (R.incl : D -> D') scottTopologicalSpace := by
  apply le_antisymm
  * intro U hU
  rw [isOpen_induced_iff (t := scottTopologicalSpace)] at hU
  obtain <V', hV'open, rfl> := hU
  rw [isOpen_iff_scottOpen] at hV'open | -
  exact scottOpen_preimage R.incl_preservesDirectedSup hV'open
  * intro U hU
  rw [isOpen_iff_scottOpen] at hU
  rw [isOpen_iff_forall_mem_open _
    (TopologicalSpace.induced (R.incl : D -> D') scottTopologicalSpace)]
  intro d hd
  have hmem : sSup (Set.image (R.retr : D' -> D) {x' \mid x' << R.incl d}) in U := by
    rw [R.sSup_image_retr_wayBelow hD' d]; exact hd
  obtain <p, hp, hpU> :=
    hU.2 (R.image_retr_wayBelow_nonempty d) (R.image_retr_wayBelow_directed d) hmem
  obtain <x', hx', rfl> := hp
  refine <(R.incl : D -> D') ^{-1} {z' \mid x' << z'}, fun z hz => ?_, ?_, hx'>
  * have hjle := R.retr.monotone (show x' <= R.incl z from (hz : x' << R.incl z).le)
  rw [R.retr_incl z] at hjle
  exact hU.1 hjle hpU
  * rw [isOpen_induced_iff (t := scottTopologicalSpace)]
  exact <{z' \mid x' << z'}, isOpen_iff_scottOpen.mpr (scottOpen_wayBelow x'), rfl>

/-- **Scott 1972, Proposition 2.10 (full statement).** A retract of a continuous lattice is a
continuous lattice (proposition_2_10_a) whose Scott topology agrees with the subspace
topology
(proposition_2_10_b). -/
theorem proposition_2_10 (R : IsContinuousLatticeRetraction D D')
  (hD' : IsContinuousLattice D') :
  IsContinuousLattice D /\
  (scottTopologicalSpace : TopologicalSpace D) =
  TopologicalSpace.induced (R.incl : D -> D') scottTopologicalSpace :=
  <proposition_2_10_a R hD', proposition_2_10_b R hD'>

/-! ### Proposition 3.7 -/

/-- **Scott 1972, Proposition 3.7 (retraction half).** If  $D_n$  is a retract of  $D'_n$ 

```

```

(`n = 0,1`), then `[D_0 -> D_1]` is a retract of `[D'_0 -> D'_1]` via
`f |-> i_1 comp f comp j_0` and `f' |-> j_1 comp f' comp i_0`. -/
structure ScottMapRetraction (D_0 D_0' D_1 D_1' : Type*)
  [CompleteLattice D_0] [CompleteLattice D_0'] [CompleteLattice D_1] [CompleteLattice D_1']
  where
  incl : ScottMap D_0 D_1 -> ScottMap D_0' D_1'
  retr : ScottMap D_0' D_1' -> ScottMap D_0 D_1
  retr_incl : forall f, retr (incl f) = f

/-- **Scott 1972, Proposition 3.7 (projection half).** Under the same hypotheses with
projections, the induced pair on function spaces is also a projection. -/
structure ScottMapProjection (D_0 D_0' D_1 D_1' : Type*)
  [CompleteLattice D_0] [CompleteLattice D_0'] [CompleteLattice D_1] [CompleteLattice D_1']
  extends
  ScottMapRetraction D_0 D_0' D_1 D_1' where
  incl_retr_le : forall f' x, (incl (retr f')) x <= f' x

namespace ScottMapRetraction

def functionSpace (R_0 : IsContinuousLatticeRetraction D_0 D_0') (R_1 :
  IsContinuousLatticeRetraction D_1 D_1') :
  ScottMapRetraction D_0 D_0' D_1 D_1' where
  incl f := ScottMap.comp R_1.incl (ScottMap.comp f R_0.retr)
  retr f' := ScottMap.comp R_1.retr (ScottMap.comp f' R_0.incl)
  retr_incl f := ScottMap.ext fun x => by simp [ScottMap.comp, R_0.retr_incl, R_1.retr_incl]

end ScottMapRetraction

namespace ScottMapProjection

def functionSpace (P_0 : IsContinuousLatticeProjection D_0 D_0') (P_1 :
  IsContinuousLatticeProjection D_1 D_1') :
  ScottMapProjection D_0 D_0' D_1 D_1' where
  toScottMapRetraction :=
  ScottMapRetraction.functionSpace P_0.toIsContinuousLatticeRetraction P_1.
  toIsContinuousLatticeRetraction
  incl_retr_le f' y := by
  dsimp only [ScottMapRetraction.functionSpace, ScottMap.comp, Function.comp_def]
  exact le_trans (P_1.incl_retr_le (f' (P_0.incl (P_0.retr y))))
  (ScottMap.monotone f' (P_0.incl_retr_le y))

end ScottMapProjection

/-- **Scott 1972, Proposition 3.7 (retraction).** Function spaces inherit retractions. -/
def proposition_3_7_retraction (R_0 : IsContinuousLatticeRetraction D_0 D_0')
  (R_1 : IsContinuousLatticeRetraction D_1 D_1') :
  ScottMapRetraction D_0 D_0' D_1 D_1' :=
  ScottMapRetraction.functionSpace R_0 R_1

/-- **Scott 1972, Proposition 3.7 (projection).** Function spaces inherit projections. -/
def proposition_3_7_projection (P_0 : IsContinuousLatticeProjection D_0 D_0')
  (P_1 : IsContinuousLatticeProjection D_1 D_1') :
  ScottMapProjection D_0 D_0' D_1 D_1' :=
  ScottMapProjection.functionSpace P_0 P_1

/#! ### Proposition 3.10 -/

section Proposition310

open Finset

namespace IsContinuousLatticeProjection

```

```

/-- **Scott 1972, Proposition 3.10(ii).** The inclusion map of a projection is injective. -/
theorem incl_injective (P : IsContinuousLatticeProjection D D') {x y : D} (h : P.incl x = P.
  incl y) : x = y := by
  rw [← P.retr_incl x, ← P.retr_incl y, h]

theorem retr_bot (P : IsContinuousLatticeProjection D D') : (P.retr : D' → D) False = False
  := by
  have hle : (False : D') ≤ P.incl (False : D) := bot_le
  have heq : (P.retr : D' → D) (P.incl (False : D)) = (False : D) := P.retr_incl (d := (
    False : D))
  exact le_antisymm (le_trans (P.retr.monotone hle) (le_of_eq heq)) bot_le

/-- **Scott 1972, Proposition 3.10(i), empty case.** `i(False) = False`. -/
theorem incl_bot (P : IsContinuousLatticeProjection D D') : P.incl (False : D) = False :=
  le_antisymm (by simp [retr_bot P] using P.incl_retr_le (False : D')) bot_le

/-- **Scott 1972, Proposition 3.10(i), binary case.** `i(x sqsup y) = i(x) sqsup i(y)`. -/
theorem incl_sup (P : IsContinuousLatticeProjection D D') (x y : D) :
  P.incl (x sqsup y) = P.incl x sqsup P.incl y := by
  apply le_antisymm
  * have hx : x ≤ P.retr (P.incl x sqsup P.incl y) :=
    le_trans (le_of_eq (P.retr_incl x).symm) (P.retr.monotone le_sup_left)
  have hy : y ≤ P.retr (P.incl x sqsup P.incl y) :=
    le_trans (le_of_eq (P.retr_incl y).symm) (P.retr.monotone le_sup_right)
  exact le_trans (P.incl.monotone (sup_le hx hy)) (P.incl_retr_le (P.incl x sqsup P.incl y)
  )
  * exact sup_le (P.incl.monotone le_sup_left) (P.incl.monotone le_sup_right)

theorem incl_finset_sup (P : IsContinuousLatticeProjection D D') (T : Finset D) :
  P.incl (T.sup (fun x => x)) = T.sup (fun x => P.incl x) := by
  classical
  refine Finset.induction_on T ?base ?step
  * simp only [sup_empty]
  exact incl_bot P
  * intro a s _ ih
  simp only [sup_insert]
  rw [incl_sup P, ih]

/-- Finite sub-lubs used in Scott's proof of Proposition 3.10(i). -/
def finsetSupOf (S : Set D) : Set D :=
  { z | exists T : Finset D, (forall x in T, x in S) /\ z = T.sup id }

theorem mem_finsetSupOf_of_mem {S : Set D} {x : D} (hx : x in S) :
  x in finsetSupOf S :=
  <{x}>, by simp [hx], by simp

theorem le_sSup_finsetSupOf (S : Set D) : sSup S ≤ sSup (finsetSupOf S) :=
  sSup_le fun _ hx => le_sSup (mem_finsetSupOf_of_mem hx)

theorem sSup_le_finsetSupOf (S : Set D) : sSup (finsetSupOf S) ≤ sSup S :=
  sSup_le fun z hz => by
  obtain <T, hTS, rfl> := hz
  exact Finset.sup_le fun t ht => le_sSup (hTS t ht)

theorem sSup_finsetSupOf (S : Set D) : sSup S = sSup (finsetSupOf S) :=
  le_antisymm (le_sSup_finsetSupOf S) (sSup_le_finsetSupOf S)

theorem directedOn_finsetSupOf (S : Set D) :
  DirectedOn (* ≤ *) (finsetSupOf S) := by
  classical
  intro a ha b hb
  obtain <T_1, hT_1, rfl> := ha
  obtain <T_2, hT_2, rfl> := hb

```

```

have hunion : (T_1 U T_2).sup id = T_1.sup id sqsup T_2.sup id := by
  simp using Finset.sup_union (s_1 := T_1) (s_2 := T_2) (f := id)
refine <T_1.sup id sqsup T_2.sup id, <T_1 U T_2, ?_, hunion.symm>, le_sup_left,
  le_sup_right>
intro x hx
simp only [Finset.mem_union] at hx
exact hx.elim (hT_1 x) (hT_2 x)

theorem directedOn_wayBelow (a : D) : DirectedOn (* <= *) { z | z << a } := by
  intro p hp q hq
  exact <p sqsup q, WayBelow.sup hp hq, le_sup_left, le_sup_right>

/-- **Scott 1972, Proposition 3.10(i).** Projections preserve arbitrary suprema. -/
theorem incl_sSup (P : IsContinuousLatticeProjection D D') (S : Set D) :
  P.incl (sSup S) = sSup (Set.image (P.incl : D -> D') S) := by
  rcases S.eq_empty_or_nonempty with hS | hS
  * subst hS
  simp only [sSup_empty, Set.image_empty, incl_bot P]
  * rw [sSup_finsetSupOf S]
  have hdir := directedOn_finsetSupOf S
  have hne : (finsetSupOf S).Nonempty := by
    obtain <x, hx> := hS
    exact <x, mem_finsetSupOf_of_mem hx>
  rw [P.incl.preservesDirectedSup_coe (finsetSupOf S) hne hdir]
  apply le_antisymm
  * apply sSup_le
  intro b hb
  obtain <z, hz, rfl> := hb
  obtain <T, hT, rfl> := hz
  have h := incl_finset_sup P T
  conv_lhs => rw [show T.sup id = T.sup (fun x => x) from rfl]
  rw [h]
  apply Finset.sup_le
  intro t ht
  exact le_sSup (Set.mem_image_of_mem (P.incl : D -> D')) (hT t ht))
  * apply sSup_le
  intro b hb
  obtain <x, hxS, rfl> := (Set.mem_image (P.incl : D -> D') S b).1 hb
  exact le_sSup (Set.mem_image_of_mem (P.incl : D -> D')) (mem_finsetSupOf_of_mem hxS))

/-- **Scott 1972, Proposition 3.10(iii).** Projections preserve the way-below relation. -/
theorem incl_wayBelow (P : IsContinuousLatticeProjection D D') (hD' : IsContinuousLattice D')
  {x y : D} (h : x << y) : @WayBelow D' _ (P.incl x) (P.incl y) := by
  set W : Set D' := { z' | @WayBelow D' _ z' (P.incl y) }
  have hWne : W.Nonempty := <(False : D'), @bot_wayBelow D' _ (P.incl y)>
  have hWdir : DirectedOn (* <= *) W := by
    intro p hp q hq
    exact <p sqsup q, @WayBelow.sup D' _ p q (P.incl y) hp hq, le_sup_left, le_sup_right>
  have hy : y = sSup (Set.image (P.retr : D' -> D) W) := by
    rw [ <- P.retr.preservesDirectedSup_coe W hWne hWdir, @IsContinuousLattice.sSup_wayBelow D
      ' _ hD' (P.incl y),
      P.retr_incl y]
  have hImgne : (Set.image (P.retr : D' -> D) W).Nonempty := by
    obtain <z', hz'> := hWne
    exact <P.retr z', z', hz', rfl>
  have hImgdir : DirectedOn (* <= *) (Set.image (P.retr : D' -> D) W) := by
    intro p hp q hq
    obtain <a, ha, rfl> := hp
    obtain <b, hb, rfl> := hq
    refine <P.retr (a sqsup b), <a sqsup b, @WayBelow.sup D' _ a b (P.incl y) ha hb, rfl>,
      ?_, ?_>
  * exact P.retr.monotone le_sup_left
  * exact P.retr.monotone le_sup_right

```

```

have hx : x << sSup (Set.image (P.retr : D' -> D) W) := by rwa [ <- hy]
obtain <prz, hprz, hxpr> := (wayBelow_sSup_iff hImgne hImgdir).1 hx
obtain <z', hz', rfl> := hprz
exact @WayBelow.le_trans D' _ (P.incl x) z' (P.incl y)
  (le_trans (P.incl.monotone hxpr.le) (P.incl_retr_le z')) hz'

/-- **Scott 1972, Proposition 3.10(i)-(iii), bundled.** The inclusion `i` of a projection
preserves
arbitrary suprema, is injective, and preserves the way-below relation. -/
theorem proposition_3_10_forward (P : IsContinuousLatticeProjection D D')
  (hD' : IsContinuousLattice D') :
  (forall S : Set D, (P.incl : D -> D') (sSup S) = sSup (Set.image (P.incl : D -> D') S)
  )
  /\ Function.Injective (P.incl : D -> D')
  /\ (forall x y : D, x << y -> (P.incl : D -> D') x << (P.incl : D -> D') y)
  :=
  <fun S => P.incl_sSup S, fun _ _ h => P.incl_injective h,
  fun _ _ h => P.incl_wayBelow hD' h>

/-- **Scott 1972, Proposition 3.10(iv), uniqueness.** The retraction of any projection is
forced to
be Scott's formula `j(x') = sqsup { x | i(x) sqsub x' }`. `<= `: `j(x')` itself satisfies
`i(j x') sqsub x'`
(by `i comp j sqsub id`), so it is a member of the set; `>= `: each member `x` (with `i x
sqsub x'`) satisfies
`x = j(i x) sqsub j(x')` by `j comp i = id` and monotonicity. -/
theorem retr_eq_sSup (P : IsContinuousLatticeProjection D D') (x' : D') :
  (P.retr : D' -> D) x' = sSup {x | (P.incl : D -> D') x <= x'} := by
  apply le_antisymm
  * exact le_sSup (show (P.incl : D -> D') (P.retr x') <= x' from P.incl_retr_le x')
  * refine sSup_le fun x hx => ?_
    calc x = (P.retr : D' -> D) (P.incl x) := (P.retr_incl x).symm
      _ <= (P.retr : D' -> D) x' := P.retr.monotone hx

end IsContinuousLatticeProjection

/#!/ #### Proposition 3.10, converse direction

Given a map `i : D -> D'` satisfying (i)-(iii), Scott's formula (iv)
`j(x') = sqsup { x | i(x) sqsub x' }` is the unique continuous retraction making `D` a
projection of `D'`. -/

variable {i : D -> D'}

/-- **Scott 1972, Proposition 3.10(iv).** Scott's candidate retraction `j(x') = sqsup { x | i
(x) sqsub x' }`. -/
noncomputable def converseRetr (i : D -> D') (x' : D') : D :=
  sSup {x | i x <= x'}

theorem converseRetr_mono (i : D -> D') : Monotone (converseRetr i) := by
  intro a b hab
  exact sSup_le_sSup fun _ hx => le_trans hx hab

/-- From (i): `i` preserves binary joins (Scott checks (i) on two-element sets). -/
theorem incl_sup_of_preservesSSup (hi : forall S : Set D, i (sSup S) = sSup (i '' S)) (x y : D) :
  i (x sqsup y) = i x sqsup i y := by
  calc i (x sqsup y) = i (sSup {x, y}) := by rw [sSup_pair]
    _ = sSup (i '' {x, y}) := hi _
    _ = sSup {i x, i y} := by rw [Set.image_pair]
    _ = i x sqsup i y := sSup_pair

/-- From (i): `i` is monotone. -/

```



```

theorem incl_mono_of_preservesSSup (hi : forall S : Set D, i (sSup S) = sSup (i '' S)) :
  Monotone i := by
  intro x y hxy
  have h := incl_sup_of_preservesSSup hi x y
  rw [sup_eq_right.mpr hxy] at h
  rw [h]; exact le_sup_left

/-- From (i)+(ii): `i` is order-reflecting (`x sqsub y <=> i x sqsub i y`), since `x
sqsub y <=> x sqsup y = y`. -/
theorem le_of_incl_le (hi : forall S : Set D, i (sSup S) = sSup (i '' S))
  (hinj : Function.Injective i) {x y : D} (h : i x <= i y) : x <= y := by
  have h1 : i (x sqsup y) = i y := by rw [incl_sup_of_preservesSSup hi, sup_eq_right.mpr h]
  exact sup_eq_right.mp (hinj h1)

/-- `i` comp `j` sqsub `id` (uses only (i)). -/
theorem incl_converseRetr_le (hi : forall S : Set D, i (sSup S) = sSup (i '' S)) (x' : D') :
  i (converseRetr i x') <= x' := by
  show i (sSup {x | i x <= x'}) <= x'
  rw [hi]
  exact sSup_le (by rintro _ <x, hx, rfl>; exact hx)

/-- `j` comp `i` = `id` (uses (i)+(ii)): `{x | i x sqsub i y} = Iic y`, whose join is `y`. -/
theorem converseRetr_incl (hi : forall S : Set D, i (sSup S) = sSup (i '' S))
  (hinj : Function.Injective i) (y : D) : converseRetr i (i y) = y := by
  have hset : {x | i x <= i y} = Set.Iic y := by
    ext x
    simp only [Set.mem_setOf_eq, Set.mem_Iic]
    exact <le_of_incl_le hi hinj, fun hx => incl_mono_of_preservesSSup hi hx>
  show sSup {x | i x <= i y} = y
  rw [hset]
  exact le_antisymm (sSup_le fun _ hx => hx) (le_sSup le_rfl)

/-- `j` is Scott-continuous (uses (i)+(iii) and continuity of `D`). For directed `S`':
monotonicity
gives `sqsup j 'S' sqsub j (sqsup S')`; conversely if `i x sqsub sqsup S'` then for
every `z << x` we have `i z << i x sqsub sqsup S'`,
so `i z sqsub x'` for some `x'` in `S'` (directedness), whence `z sqsub j(x') sqsub
sqsup j 'S'`; continuity of `D`
then gives `x sqsub sqsup j 'S'`. -/
theorem converseRetr_preservesDirectedSup
  (hi : forall S : Set D, i (sSup S) = sSup (i '' S))
  (hwb : forall {x y : D}, x << y -> i x << i y) (hD : IsContinuousLattice D) :
  PreservesDirectedSup (converseRetr i) := by
  intro S' hS'ne hS'dir
  apply le_antisymm
  * show sSup {x | i x <= sSup S'} <= sSup (converseRetr i '' S')
    apply sSup_le
    intro x hx
    have hx' : i x <= sSup S' := hx
    rw [← hD.sSup_wayBelow x]
    apply sSup_le
    intro z hz
    have hiz : i z << sSup S' := (hwb hz).trans_le hx'
    obtain <x', hx'S', hzx'> := (wayBelow_sSup_iff hS'ne hS'dir).1 hiz
    have hz_mem : z in {x | i x <= x'} := hzx'.le
    exact le_trans (le_sSup hz_mem) (le_sSup <x', hx'S', rfl>)
  * apply sSup_le
    rintro _ <x', hx'S', rfl>
    exact converseRetr_mono i (le_sSup hx'S')

/-- The projection assembled from a map `i` satisfying 3.10(i)-(iii). -/
noncomputable def converseProjection
  (hi : forall S : Set D, i (sSup S) = sSup (i '' S)) (hinj : Function.Injective i)

```

```

    (hwb : forall {x y : D}, x << y -> i x << i y) (hD : IsContinuousLattice D) :
    IsContinuousLatticeProjection D D' where
    incl := <i, continuous_of_preservesDirectedSup (fun _ _ => hi _)>
    retr := <converseRetr i, continuous_of_preservesDirectedSup
    (converseRetr_preservesDirectedSup hi hwb hD)>
    retr_incl := fun d => converseRetr_incl hi hinj d
    incl_retr_le := fun x' => incl_converseRetr_le hi x'

/-- **Scott 1972, Proposition 3.10 (converse).** If `i : D -> D'` (between continuous
lattices)
satisfies (i) preservation of arbitrary suprema, (ii) injectivity, and (iii) preservation of `
<<`,
then there is a continuous `j` making `D` a projection of `D'` via `i`, with `j` given by Scott
's
formula (iv) `j(x') = sqsup { x | i(x) sqsub x' }`. -/
theorem proposition_3_10_converse
  (hi : forall S : Set D, i (sSup S) = sSup (i ' S)) (hinj : Function.Injective i)
  (hwb : forall {x y : D}, x << y -> i x << i y) (hD : IsContinuousLattice D) :
  exists P : IsContinuousLatticeProjection D D',
  (forall d, (P.incl : D -> D') d = i d)
  /\ (forall x', (P.retr : D' -> D) x' = sSup {x | i x <= x'}) :=
  <converseProjection hi hinj hwb hD, fun _ => rfl, fun _ => rfl>

end Proposition310

/#!/ ### Proposition 3.8 -/

section SubspaceExtension

variable {X Y : Type*} [TopologicalSpace X] [TopologicalSpace Y] [CompleteLattice Y]

/-- **Scott 1972, Proposition 3.8.** The infimum term `sqcap { f(x) : e(x) in U }` for open
`U subseq Y`. -/
noncomputable def scottSubspaceExtendInf (e : X -> Y) (f : X -> D) (U : Set Y) : D :=
  sInf (f ' (e ^-1 U))

/-- **Scott 1972, Proposition 3.8.** Scott's maximal subspace extension `f : Y -> D`. -/
noncomputable def scottSubspaceExtend (e : X -> Y) (f : X -> D) (y : Y) : D :=
  sSup { d | exists U, @IsOpen Y scottTopologicalSpace U /\ y in U /\ d =
    scottSubspaceExtendInf e f U }

omit [TopologicalSpace Y] in
theorem scottSubspaceExtendInf_le_of_mem {f' : ScottMap Y D} {U : Set Y} {y : Y}
  (hyU : y in U) : sInf (Set.image (f' : Y -> D) U) <= f' y :=
  sInf_le (Set.mem_image_of_mem _ hyU)

theorem sInf_image_le_sInf_image_of_subset {a : Type*} {f : a -> D} {S T : Set a}
  (hST : S subseq T) : sInf (Set.image f T) <= sInf (Set.image f S) :=
  sInf_le_sInf fun _ hd => by
  obtain <s, hs, rfl> := hd
  exact <s, hST hs, rfl>

```

Lean 4 source (lines 1201–1600)

```

theorem scottMap_eq_sSup_openInfs (hD : IsContinuousLattice D) (f' : ScottMap Y D) (y : Y) :
  (f' : Y -> D) y =
  sSup { d | exists U, @IsOpen Y scottTopologicalSpace U /\ y in U /\
    d = sInf (Set.image (f' : Y -> D) U) } := by
  apply le_antisymm
  * rw [ <- IsContinuousLattice.sSup_wayBelow hD (f' y) ]
  apply sSup_le
  intro a ha
  obtain <V, hV, hf'V, hVsub> := ha
  have hVopen : @IsOpen D scottTopologicalSpace V := isOpen_iff_scottOpen.mpr hV

```

```

have hyU : y in (f' : Y → D) -1 V := hf'V
have hUScott : ScottOpen ((f' : Y → D) -1 V) :=
  scottOpen_preimage ((proposition_2_5 (Subtype.val f')).mp f'.property) hV
have hUopen : @IsOpen Y scottTopologicalSpace ((f' : Y → D) -1 V) :=
  isOpen_iff_scottOpen.mpr hUScott
have ha' : a ≤ sInf (Set.image (f' : Y → D) ((f' : Y → D) -1 V)) := by
  apply le_sInf
  intro d hd
  obtain <z, hzV, rfl> := hd
  exact Set.mem_Ici.1 (hVsub hzV)
have hmem : sInf (Set.image (f' : Y → D) ((f' : Y → D) -1 V)) in
  { d | exists U, @IsOpen Y scottTopologicalSpace U /\ y in U /\
    d = sInf (Set.image (f' : Y → D) U) } :=
  <(f' : Y → D) -1 V, hUopen, hyU, rfl>
exact le_trans ha' (le_sSup hmem)
* apply sSup_le
  intro d hd
  obtain <U, hUopen, hyU, rfl> := hd
  exact scottSubspaceExtendInf_le_of_mem (f' := f') hyU

theorem scottSubspaceExtendInf_eq_of_comp {e : X → Y} {f : X → D} {U : Set Y}
  (f' : ScottMap Y D) (h : forall x, f' (e x) = f x) :
  scottSubspaceExtendInf e f U = sInf (Set.image (f' : Y → D) (Set.image e Set.univ I U))
  := by
have hset : f -1 (e -1 U) = Set.image (f' : Y → D) (Set.image e Set.univ I U) := by
  ext d
  simp only [Set.mem_image, Set.mem_preimage, Set.mem_inter_iff, Set.mem_univ, true_and]
  constructor
  * rintro <x, hxU, heq>
    refine <e x, <?_, hxU>, ?_>
    * exact <x, rfl>
    * rw [h x, heq]
  * rintro <y, <hex, hyU>, heq>
    obtain <x, _, rfl> := hex
    exact <x, hyU, (h x).symm.trans heq>
  rw [scottSubspaceExtendInf, hset]

/-- **Scott 1972, Proposition 3.8 (subspace variant).** `f` (with the Scott topology on `Y`) is
the maximal extension along a subspace embedding. The faithful statement (arbitrary topology on
`Y`) is `proposition_3_8` in `Constructions.lean`. -/
theorem scottSubspaceExtend_maximal (hD : IsContinuousLattice D) (e : X → Y) (_he :
  IsEmbedding e)
  (f : X → D) (f' : ScottMap Y D) (h_ext : forall x, f' (e x) = f x) (y : Y) :
  (f' : Y → D) y ≤ scottSubspaceExtend e f y := by
have hEq := scottMap_eq_sSup_openInfs hD f' y
have hmain :
  sSup { d | exists U, @IsOpen Y scottTopologicalSpace U /\ y in U /\
    d = sInf (Set.image (f' : Y → D) U) } ≤ scottSubspaceExtend e f y := by
  unfold scottSubspaceExtend
  apply sSup_le
  intro d hd
  obtain <U, hUopen, hyU, rfl> := hd
  have hmem : scottSubspaceExtendInf e f U in
    { d | exists U, @IsOpen Y scottTopologicalSpace U /\ y in U /\ d =
      scottSubspaceExtendInf e f U } :=
    <U, hUopen, hyU, rfl>
  refine le_trans ?_ (le_sSup hmem)
have hrestrict :
  sInf (Set.image (f' : Y → D) U) ≤
    sInf (Set.image (f' : Y → D) (Set.image e Set.univ I U)) :=
  sInf_image_le_sInf_image_of_subset
  (show Set.image e Set.univ I U subseq U from inter_subset_right)
  refine le_trans hrestrict (le_of_eq (scottSubspaceExtendInf_eq_of_comp (f' := f') h_ext)).

```

```

    symm)
  exact le_trans (le_of_eq hEq) hmain

omit [TopologicalSpace X] [TopologicalSpace Y] [CompleteLattice Y] in
theorem scottSubspaceExtendInf_mono {e : X → Y} {f g_0 : X → D} (hfg : forall x, f x ≤
  g_0 x) (U : Set Y) :
  scottSubspaceExtendInf e f U ≤ scottSubspaceExtendInf e g_0 U := by
  apply le_sInf
  intro d hd
  obtain <x, hxU, rfl> := hd
  exact le_trans (sInf_le <x, hxU, rfl>) (hfg x)

theorem scottSubspaceExtend_mono {e : X → Y} {f g_0 : X → D} (hfg : forall x, f x ≤
  g_0 x) (y : Y) :
  scottSubspaceExtend e f y ≤ scottSubspaceExtend e g_0 y := by
  apply sSup_le
  intro d hd
  obtain <U, hUopen, hyU, rfl> := hd
  have hmem : scottSubspaceExtendInf e g_0 U in
    { d | exists U, @IsOpen Y scottTopologicalSpace U /\ y in U /\ d =
      scottSubspaceExtendInf e g_0 U } :=
    <U, hUopen, hyU, rfl>
  exact le_trans (scottSubspaceExtendInf_mono hfg U) (le_sSup hmem)

theorem scottSubspaceExtendInf_eq_of_ext {e : X → Y} {f g' : X → D} (h : forall x, f x =
  g' x) (U : Set Y) :
  scottSubspaceExtendInf e f U = scottSubspaceExtendInf e g' U := by
  unfold scottSubspaceExtendInf
  congr 1
  ext d
  simp [Set.mem_image, Set.mem_preimage, h]

theorem scottSubspaceExtend_eq_of_ext {e : X → Y} {f g' : X → D} (h : forall x, f x = g'
  x) (y : Y) :
  scottSubspaceExtend e f y = scottSubspaceExtend e g' y := by
  unfold scottSubspaceExtend
  congr 1
  ext d
  simp [Set.mem_setOf_eq, scottSubspaceExtendInf_eq_of_ext h]

theorem scottSubspaceExtendInf_mono_retr {e : X → Y} {g : X → D'}
  (P : IsContinuousLatticeProjection D D') (U : Set Y) :
  P.retr (scottSubspaceExtendInf e g U) ≤ scottSubspaceExtendInf e (fun x => P.retr (g x))
  U := by
  apply le_sInf
  intro d hd
  obtain <x, hxU, rfl> := hd
  have hx : x in e-1 U := Set.mem_preimage.mpr hxU
  exact (P.retr.monotone (sInf_le (Set.mem_image_of_mem g hx))).trans le_rfl

theorem scottSubspaceExtendInf_mono_incl {e : X → Y} {f : X → D} {g : X → D'}
  (P : IsContinuousLatticeProjection D D') (hfg : forall x, f x = P.retr (g x)) (U : Set Y)
  :
  scottSubspaceExtendInf e (fun x => P.incl (f x)) U ≤ scottSubspaceExtendInf e g U := by
  apply le_sInf
  intro d hd
  obtain <x, hxU, rfl> := hd
  have hx : x in e-1 U := Set.mem_preimage.mpr hxU
  have hmem : P.incl (f x) in (fun x => P.incl (f x)) '' (e-1 U) :=
    Set.mem_image_of_mem _ hx
  have hincl : P.incl (f x) ≤ g x := by rw [hfg x]; exact P.incl_retr_le (g x)
  exact le_trans (sInf_le hmem) hincl

```

```

theorem scottSubspaceExtendInf_mono_incl_apply {e : X → Y} {f : X → D} (U : Set Y)
  (P : IsContinuousLatticeProjection D D') :
  P.incl (scottSubspaceExtendInf e f U) <= scottSubspaceExtendInf e (fun x => P.incl (f x))
  U := by
  apply le_sInf
  intro d hd
  obtain <x, hxU, rfl> := hd
  exact P.incl.monotone (sInf_le (Set.mem_image_of_mem f (Set.mem_preimage.mpr hxU)))

/-- **Scott 1972, Lemma 3.9 (inclusion at infimum level).** Used in the inverse-limit
argument (Theorem 4.4). -/
theorem lemma_3_9_incl_inf {e : X → Y} (P : IsContinuousLatticeProjection D D')
  {f : X → D} {g : X → D'} (hfg : forall x, f x = P.retr (g x)) (U : Set Y) :
  P.incl (scottSubspaceExtendInf e f U) <= scottSubspaceExtendInf e g U :=
  le_trans (scottSubspaceExtendInf_mono_incl_apply (e := e) (f := f) U P)
  (scottSubspaceExtendInf_mono_incl (e := e) (f := f) (g := g) P hfg U)

/-- **Scott 1972, Lemma 3.9 (retraction at infimum level).** The global equality
`f = j comp g` assembles these infimum bounds via Proposition 3.10(i). -/
theorem lemma_3_9_retr_inf {e : X → Y} (P : IsContinuousLatticeProjection D D') {g : X →
D'}
  (U : Set Y) :
  P.retr (scottSubspaceExtendInf e g U) <= scottSubspaceExtendInf e (fun x => P.retr (g x))
  U :=
  scottSubspaceExtendInf_mono_retr (e := e) (g := g) P U

end SubspaceExtension

/-! ### Definition 3.11 / Proposition 3.12: the lattice of projections `J_D` -/

section Projections

/-- **Scott 1972, Definition 3.11.** `J_D = { j in [D → D] : j = j comp j sqsub id }` :
the Scott-continuous
projections of `D` (idempotent self-maps below the identity), as a predicate on `[D → D]`.
-/
def IsProjection (j : ScottMap D D) : Prop :=
  j.comp j = j /\ j <= ScottMap.idMap

/-- Pointwise characterization of projections: idempotent and deflationary. -/
theorem isProjection_iff {j : ScottMap D D} :
  IsProjection j <=> (forall x, (j : D → D) (j x) = j x) /\ (forall x, (j : D → D)
) x <= x) := by
  constructor
  * rintro <hidem, hle>
  refine <fun x => ?_, fun x => ?_>
  * have h : ((j.comp j : ScottMap D D) : D → D) x = (j : D → D) x := by rw [hidem]
  rwa [ScottMap.comp_apply] at h
  * have h := (ScottMap.le_def.mp hle) x
  rwa [ScottMap.idMap_apply] at h
  * rintro <hidem, hle>
  exact <ScottMap.ext fun x => by rw [ScottMap.comp_apply]; exact hidem x,
  ScottMap.le_def.mpr fun x => by rw [ScottMap.idMap_apply]; exact hle x>

/-- `False` (the constant `False` map) is a projection -- Scott's `sqsup {}` in `J_D`. -/
theorem isProjection_bot : IsProjection (False : ScottMap D D) := by
  rw [isProjection_iff]
  refine <fun x => ?_, fun x => ?_>
  * simp only [ScottMap.bot_apply]
  * rw [ScottMap.bot_apply]; exact bot_le

/-- `J_D` is closed under binary joins (Scott 1972, 3.12). The key step: since `j x sqsup k x
sqsub x`,

```

```

monotonicity and idempotency force `j (j x sqsup k x) = j x` and `k (j x sqsup k x) = k x`.
-/
theorem isProjection_sup {j k : ScottMap D D} (hj : IsProjection j) (hk : IsProjection k) :
  IsProjection (j sqsup k) := by
  rw [isProjection_iff] at hj hk |-
  obtain <hjidem, hjle> := hj
  obtain <hkidem, hkle> := hk
  refine <fun x => ?_, fun x => ?_>
  * have hjkle : (j : D -> D) x sqsup k x <= x := sup_le (hjle x) (hkle x)
  have hj_eq : (j : D -> D) (j x sqsup k x) = j x :=
    le_antisymm (j.monotone hjkle) (le_of_eq_of_le (hjidem x).symm (j.monotone le_sup_left))
  have hk_eq : (k : D -> D) (j x sqsup k x) = k x :=
    le_antisymm (k.monotone hjkle) (le_of_eq_of_le (hkidem x).symm (k.monotone le_sup_right))
  rw [ScottMap.sup_apply, ScottMap.sup_apply, hj_eq, hk_eq]
  * rw [ScottMap.sup_apply]; exact sup_le (hjle x) (hkle x)

/-- `J_D` is closed under finite joins. -/
theorem isProjection_finsetSup {T : Finset (ScottMap D D)} (hT : forall j in T, IsProjection
  j) :
  IsProjection (T.sup id) :=
  Finset.sup_induction isProjection_bot (fun _ ha _ hb => isProjection_sup ha hb) hT

/-- `J_D` is closed under *directed* joins (Scott 1972, 3.12). Continuity of each member lets
  the
  inner `(sqsup S)`-application distribute over the directed family `{ j x : j in S }`, and
  directedness
  plus idempotency collapse the double family `{ k (j x) }` to `(sqsup S) x`. -/
theorem isProjection_directedSup {S : Set (ScottMap D D)} (hSne : S.Nonempty)
  (hSdir : DirectedOn (* <= *) S) (hS : forall j in S, IsProjection j) :
  IsProjection (sSup S) := by
  have hidem : forall j in S, forall x, (j : D -> D) (j x) = j x :=
    fun j hj => (isProjection_iff.mp (hS j hj)).1
  have hle : forall j in S, forall x, (j : D -> D) x <= x := fun j hj => (
    isProjection_iff.mp (hS j hj)).2
  rw [isProjection_iff]
  refine <fun x => ?_, fun x => ?_>
  * set A := Set.image (fun j : ScottMap D D => (j : D -> D) x) S with hA
  have hAne : A.Nonempty := hSne.image _
  have hAdir : DirectedOn (* <= *) A := by
    rintro _ <j, hj, rfl> _ <k, hk, rfl>
    obtain <m, hm, hjm, hkm> := hSdir j hj k hk
    exact <(m : D -> D) x, Set.mem_image_of_mem _ hm, hjm x, hkm x>
  have hsSx : ((sSup S : ScottMap D D) : D -> D) x = sSup A := ScottMap.sSup_apply S x
  apply le_antisymm
  * rw [hsSx, ScottMap.sSup_apply]
  refine sSup_le ?_
  rintro _ <k, hk, rfl>
  show (k : D -> D) (sSup A) <= sSup A
  rw [k.preservesDirectedSup_coe A hAne hAdir]
  refine sSup_le ?_
  rintro _ <_, <j, hj, rfl>, rfl>
  obtain <m, hm, hjm, hkm> := hSdir j hj k hk
  calc (k : D -> D) (j x) <= (m : D -> D) (j x) := hkm (j x)
  _ <= (m : D -> D) (m x) := m.monotone (hjm x)
  _ = (m : D -> D) x := hidem m hm x
  _ <= sSup A := le_sSup (Set.mem_image_of_mem _ hm)
  * rw [hsSx, ScottMap.sSup_apply]
  refine sSup_le ?_
  rintro _ <j, hj, rfl>
  have hjxA : (j : D -> D) x <= sSup A := le_sSup (Set.mem_image_of_mem _ hj)
  calc (j : D -> D) x = (j : D -> D) (j x) := (hidem j hj x).symm
  _ <= (j : D -> D) (sSup A) := j.monotone hjxA
  _ <= sSup (Set.image (fun f : ScottMap D D => (f : D -> D) (sSup A)) S) :=

```

```

        le_sSup (Set.mem_image_of_mem _ hj)
* rw [ScottMap.sSup_apply]
  refine sSup_le ?_
  rintro _ <j, hj, rfl>
  exact hle j hj x

/-- **Scott 1972, Proposition 3.12 (`sqsup`-closure).** `J_D` is closed under arbitrary
suprema in
`[D -> D]`: every supremum is the directed supremum of finite sub-joins (`finsetSupOf`), each
a
projection by `isProjection_finsetSup`. -/
theorem isProjection_sSup {T : Set (ScottMap D D)} (hT : forall j in T, IsProjection j) :
  IsProjection (sSup T) := by
  rw [IsContinuousLatticeProjection.sSup_finsetSupOf T]
  refine isProjection_directedSup <False, {}, by simp, by simp>
  (IsContinuousLatticeProjection.directedOn_finsetSupOf T) ?_
  rintro z <F, hF, rfl>
  exact isProjection_finsetSup fun j hj => hT j (hF j hj)

/-- **Scott 1972, Definition 3.11.** The space `J_D` of projections of `D`, as a subtype of
`[D -> D]`. -/
abbrev Projections (D : Type*) [CompleteLattice D] : Type _ := {j : ScottMap D D //
  IsProjection j}

namespace Projections

noncomputable instance instSupSet : SupSet (Projections D) :=
  <fun T => <sSup (Set.image Subtype.val T), isProjection_sSup (by rintro j <p, _, rfl>; exact
    p.2)>>

theorem isLUB_sSup (T : Set (Projections D)) : IsLUB T (sSup T) := by
  constructor
* intro p hp
  apply Subtype.coe_le_coe.mp
  show (p : ScottMap D D) <= ((sSup T : Projections D) : ScottMap D D)
  exact le_sSup (Set.mem_image_of_mem _ hp)
* intro q hq
  apply Subtype.coe_le_coe.mp
  show ((sSup T : Projections D) : ScottMap D D) <= (q : ScottMap D D)
  refine sSup_le ?_
  rintro _ <p, hp, rfl>
  exact Subtype.coe_le_coe.mpr (hq hp)

/-- **Scott 1972, Proposition 3.12.** `J_D` is a complete lattice (a `sqsup`-closed subspace
of
`[D -> D]`). Suprema are inherited from `[D -> D]`; infima are derived by `
completeLatticeOfSup`. -/
noncomputable instance instCompleteLattice : CompleteLattice (Projections D) :=
  completeLatticeOfSup (Projections D) isLUB_sSup

end Projections

/-- **Scott 1972, Proposition 3.12.** For a (complete, in particular continuous) lattice `D`,
the
projections `J_D` form a complete lattice as a `sqsup`-closed subspace of `[D -> D]`: the `
sqsup`-closure is
`isProjection_sSup`, and the complete-lattice structure is `Projections.instCompleteLattice`.
-/
theorem proposition_3_12 :
  (forall T : Set (ScottMap D D), (forall j in T, IsProjection j) -> IsProjection (sSup
    T))
  /\ Nonempty (CompleteLattice (Projections D)) :=
  <fun _ h => isProjection_sSup h, <Projections.instCompleteLattice>>

```

```

end Projections

/#! ### Proposition 3.13: `D` is a projection of `[D -> D]` -/

namespace Proposition313

/-- **Scott 1972, Proposition 3.13.** `con : D -> [D -> D]` sends `x` to the constant
    function `x`. -/
noncomputable def con : ScottMap D (ScottMap D D) :=
  <fun x => ScottMap.const x, continuous_of_preservesDirectedSup (by
    intro S _ _
    apply ScottMap.ext
    intro y
    rw [ScottMap.sSup_apply, Set.image_image]
    simp only [ScottMap.const_apply, Set.image_id']>>

/-- **Scott 1972, Proposition 3.13.** `min : [D -> D] -> D` sends `f` to its least value `f
    (False)`. -/
noncomputable def min : ScottMap (ScottMap D D) D :=
  <fun f => (f : D -> D) False, continuous_of_preservesDirectedSup (by
    intro F _ _
    show ((sSup F : ScottMap D D) : D -> D) False
      = sSup (Set.image (fun f : ScottMap D D => (f : D -> D) False) F)
    rw [ScottMap.sSup_apply]>>

@[simp] theorem con_apply (x y : D) : ((con x : ScottMap D D) : D -> D) y = x := rfl

@[simp] theorem min_apply (f : ScottMap D D) : (min f : D) = (f : D -> D) False := rfl

/-- **Scott 1972, Proposition 3.13.** `(con, min)` makes `D` a projection of `[D -> D]`:
    `min comp con = id` (a constant's least value is its value) and `con comp min sqsub id` (
    the constant `f(False)`
    is `<= f` pointwise, since `f(False) sqsub f(y)` by monotonicity). -/
noncomputable def projection : IsContinuousLatticeProjection D (ScottMap D D) where
  incl := con
  retr := min
  retr_incl := fun _ => rfl
  incl_retr_le := fun f => by
    rw [ScottMap.le_def]
    intro y
    show ((ScottMap.const ((f : D -> D) False) : ScottMap D D) : D -> D) y <= (f : D ->
      D) y
    rw [ScottMap.const_apply]
    exact f.monotone bot_le

end Proposition313

/-- **Scott 1972, Proposition 3.13.** Every continuous lattice `D` is a projection of its
    function
    space `[D -> D]`, via `con`/`min` (`Proposition313.projection`). -/
theorem proposition_3_13 (hD : IsContinuousLattice D) :
  Nonempty (IsContinuousLatticeProjection D (ScottMap D D)) :=
  <Proposition313.projection>

/#! ### Proposition 3.14: the fixed-point operator `fix : [D -> D] -> D` -/

namespace Proposition314

/-- The monotone map underlying a Scott map, suitable for `OrderHom.lfp`. -/
def toOrderHom (f : ScottMap D D) : D -> o D := <(f : D -> D), f.monotone>

/-- **Scott 1972, Proposition 3.14.** `fix f` is the least (pre-)fixed point of `f`, supplied

```



```

by
mathlib's `OrderHom.lfp`. -/
noncomputable def fix (f : ScottMap D D) : D := (toOrderHom f).lfp

/-- `fix f` is a fixed point of `f`. -/
theorem fix_eq (f : ScottMap D D) : (f : D → D) (fix f) = fix f :=
  (toOrderHom f).map_lfp

/-- `fix f` is below every pre-fixed point: `f x sqsub x ? fix f sqsub x`. -/
theorem fix_le {f : ScottMap D D} {x : D} (h : (f : D → D) x ≤ x) : fix f ≤ x :=
  (toOrderHom f).lfp_le h

/-- `fix` is monotone in `f`: if `f sqsub f'` then `fix f sqsub fix f'`, since `f (fix f')
sqsub f' (fix f') =
fix f'` makes `fix f'` a pre-fixed point of `f`. -/
theorem fix_mono {f f' : ScottMap D D} (hff' : f ≤ f') : fix f ≤ fix f' :=
  fix_le (le_trans (ScottMap.le_def.mp hff' (fix f')) (le_of_eq (fix_eq f'))))

/-- **Scott 1972, Proposition 3.14 (continuity).** `fix` preserves directed suprema. Direct
lattice argument (no Kleene iteration): write `g = sqsup S` and `a = sqsup {fix f : f in S
}`. The reverse
bound `a sqsub fix g` is `fix`-monotonicity. For `fix g sqsub a` it suffices (by `fix_le`)
that `a` is a
pre-fixed point of `g`. Now `g a = sqsup _{f in S} f a` (pointwise sup), and each `f a =
sqsup _{f' in S} f (fix f')`
(continuity of `f` on the directed family `{fix f'}`); for any `f, f' in S` pick `h in S`
above both,
so `f (fix f') sqsub h (fix f') sqsub h (fix h) = fix h sqsub a`. Hence `g a sqsub a`.
-/
theorem fix_preservesDirectedSup : PreservesDirectedSup (fix : ScottMap D D → D) := by
  intro S hSne hSdir
  set T : Set D := Set.image fix S with hTdef
  have hTne : T.Nonempty := hSne.image fix
  have hTdir : DirectedOn (* ≤ *) T := by
    rintro _ <f, hf, rfl> _ <f', hf', rfl>
    obtain <h, hh, hfh, hf'h> := hSdir f hf f' hf'
    exact <fix h, Set.mem_image_of_mem fix hh, fix_mono hfh, fix_mono hf'h>
  show fix (sSup S) = sSup T
  apply le_antisymm
  * apply fix_le
    show ((sSup S : ScottMap D D) : D → D) (sSup T) ≤ sSup T
    rw [ScottMap.sSup_apply]
    apply sSup_le
    rintro _ <f, hf, rfl>
    show (f : D → D) (sSup T) ≤ sSup T
    rw [f.preservesDirectedSup_coe T hTne hTdir]
    apply sSup_le
    rintro _ <_, <f', hf', rfl>, rfl>
    obtain <h, hh, hfh, hf'h> := hSdir f hf f' hf'
    calc (f : D → D) (fix f')
      ≤ (h : D → D) (fix f') := ScottMap.le_def.mp hfh (fix f')
      _ ≤ (h : D → D) (fix h) := h.monotone (fix_mono hf'h)
      _ = fix h := fix_eq h
      _ ≤ sSup T := le_sSup (Set.mem_image_of_mem fix hh)
  * apply sSup_le
    rintro _ <f, hf, rfl>
    exact fix_mono (le_sSup hf)

```

Lean 4 source (lines 1601–1633)

```

/-- **Scott 1972, Proposition 3.14.** The fixed-point operator as a Scott-continuous map. -/
noncomputable def fixMap : ScottMap (ScottMap D D) D :=
  <fix, continuous_of_preservesDirectedSup fix_preservesDirectedSup>

```

```

@[simp] theorem fixMap_apply (f : ScottMap D D) : (fixMap f : D) = fix f := rfl

/-- Uniqueness: any value that is a fixed point of `f` and below every pre-fixed point equals
`fix f` (the least fixed point is unique). -/
theorem fix_unique {f : ScottMap D D} {a : D} (hfix : (f : D → D) a = a)
  (hleat : forall x, (f : D → D) x ≤ x → a ≤ x) : a = fix f :=
  le_antisymm (hleat (fix f) (le_of_eq (fix_eq f))) (fix_le hfix.le)

end Proposition314

/-- **Scott 1972, Proposition 3.14.** For a continuous lattice `D` there is a uniquely
determined
continuous mapping `fix : [D → D] → D` such that `f (fix f) = fix f` for all `f`, and `
fix f sqsub x`
whenever `f x sqsub x`. Existence and continuity are `Proposition314.fixMap`; the defining
equations are
`fix_eq`/`fix_le`; uniqueness (any operator with these two properties agrees with `fix`) is
`fix_unique`. -/
theorem proposition_3_14 (_hD : IsContinuousLattice D) :
  exists Fix : ScottMap (ScottMap D D) D,
    (forall f : ScottMap D D, (f : D → D) (Fix f) = Fix f)
    /\ (forall (f : ScottMap D D) (x : D), (f : D → D) x ≤ x → (Fix f : D) ≤
x)
    /\ (forall g : ScottMap D D → D,
      (forall f : ScottMap D D, (f : D → D) (g f) = g f) →
      (forall (f : ScottMap D D) (x : D), (f : D → D) x ≤ x → g f ≤ x) →
      forall f : ScottMap D D, g f = Fix f) :=
  <Proposition314.fixMap, fun f => Proposition314.fix_eq f,
    fun _ h => Proposition314.fix_le h,
    fun _ hfix hleat f => Proposition314.fix_unique (hfix f) (fun x hx => hleat f x hx)>

end Scott1972.ContinuousLattice

```

A.5 vendor/scott1972/Scott1972/ContinuousLattice/Injective.lean

132 lines.

Lean 4 source

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
Github: https://github.com/catskillsresearch/scott1972
-/

import Mathlib.Topology.ContinuousMap.T0Sierpinski
import Mathlib.Topology.ContinuousMap.Basic
import Mathlib.Topology.Sets.Opens

/-!
# Injective spaces (Scott 1972, S1)

Scott's S1 introduces *injective* `T_0`-spaces -- those with the extension property for
continuous maps along subspace embeddings -- and shows the two-point Sierpinski space is
injective, that injectivity is preserved by products and by retracts, and (the embedding
theorem) that every `T_0`-space embeds in a power of the Sierpinski space.

## Main definitions / results

* `IsInjectiveSpace` -- Scott's Definition 1.1.
* `proposition_1_2` ... `proposition_1_5` -- Scott's Propositions 1.2–1.5.

```

```

* `corollary_1_6`, `corollary_1_7` -- Scott's Corollaries 1.6 and 1.7.
-/

/-- Scott's two-point Sierpinski space 0 : `Prop` with the Sierpinski topology. -/
abbrev Sierpinski := Prop

open Topology TopologicalSpace

universe u v w

/-- **Scott 1972, Definition 1.1.** A topological space `D` is *injective* when, for every
topological embedding `e : X -> Y` and every continuous `f : X -> D`, there is a continuous
`g : Y -> D` extending `f` along `e`. -/
def IsInjectiveSpace (D : Type v) [TopologicalSpace D] : Prop :=
  forall {X Y : Type u} [TopologicalSpace X] [TopologicalSpace Y] (e : X -> Y),
    IsEmbedding e -> forall f : C(X, D), exists g : C(Y, D), forall x, g (e x) = f x

/-- **Scott 1972, Proposition 1.2.** The Sierpinski space is injective. -/
theorem isInjectiveSpace_sierpinski : IsInjectiveSpace.{u} Prop := by
  intro X Y _ _ e he f
  have hfopen : IsOpen {x | f x} := continuous_Prop.1 f.continuous
  rw [he.isInducing.isOpen_iff] at hfopen
  obtain <V, hVopen, hVeq> := hfopen
  refine <<fun y => y in V, continuous_Prop.2 hVopen>, fun x => ?_>
  have : (e x in V) = (x in {x | f x}) := by rw [← hVeq]; rfl
  simpa using this

theorem proposition_1_2 : IsInjectiveSpace.{u} Sierpinski :=
  isInjectiveSpace_sierpinski

/-- **Scott 1972, Proposition 1.3.** Products of injective spaces are injective. -/
theorem IsInjectiveSpace.pi {? : Type w} (D : ? -> Type v) [forall i, TopologicalSpace (D i)]
  ]
  (h : forall i, IsInjectiveSpace.{u} (D i)) : IsInjectiveSpace.{u} (forall i, D i) := by
  intro X Y _ _ e he f
  choose g hg using fun i =>
    h i e he <fun x => f x i, (continuous_apply i).comp f.continuous>
  refine <<fun y i => g i y, continuous_pi fun i => (g i).continuous>, fun x => ?_>
  funext i
  exact hg i x

theorem proposition_1_3 {? : Type w} (D : ? -> Type v) [forall i, TopologicalSpace (D i)]
  (h : forall i, IsInjectiveSpace.{u} (D i)) : IsInjectiveSpace.{u} (forall i, D i) :=
  IsInjectiveSpace.pi D h

/-- **Scott 1972, Proposition 1.4.** Retracts of injective spaces are injective. -/
theorem IsInjectiveSpace.of_retract {D : Type v} {D' : Type v}
  [TopologicalSpace D] [TopologicalSpace D'] (hD : IsInjectiveSpace.{u} D)
  (s : C(D', D)) (r : C(D, D')) (hrs : forall d, r (s d) = d) :
  IsInjectiveSpace.{u} D' := by
  intro X Y _ _ e he f
  obtain <g, hg> := hD e he (s.comp f)
  refine <r.comp g, fun x => ?_>
  show r (g (e x)) = f x
  rw [hg x]
  exact hrs (f x)

theorem proposition_1_4 {D : Type v} {D' : Type v} [TopologicalSpace D] [TopologicalSpace D']
  (hD : IsInjectiveSpace.{u} D) (s : C(D', D)) (r : C(D, D')) (hrs : forall d, r (s d) = d)
  :
  IsInjectiveSpace.{u} D' :=
  IsInjectiveSpace.of_retract hD s r hrs

```

```

theorem isInjectiveSpace_sierpinski_power (? : Type w) :
  IsInjectiveSpace.{u} (? -> Prop) :=
  proposition_1_3 (fun _ : ? => Prop) (fun _ => proposition_1_2)

/-- **Scott 1972, Proposition 1.5.** Every  $T_0$ -space embeds into a power of  $\mathbb{0}$ , and that
power is injective. -/
theorem proposition_1_5 (X : Type u) [TopologicalSpace X] [TOSpace X] :
  IsInjectiveSpace.{u,u} (Opens X -> Prop) /\
  IsEmbedding (productOfMemOpens X) := by
  refine <?_, productOfMemOpens_isEmbedding X>
  exact isInjectiveSpace_sierpinski_power (Opens X)

theorem t0_isEmbedding_into_sierpinski_power (X : Type u) [TopologicalSpace X] [TOSpace X] :
  IsEmbedding (productOfMemOpens X) :=
  (proposition_1_5 X).2

/-- Scott's notion of retract: a subspace with a continuous retraction. -/
structure IsRetractSubspace (D' D : Type u) [TopologicalSpace D'] [TopologicalSpace D] where
  section' : C(D', D)
  isEmbedding_section : IsEmbedding section'
  retraction : C(D, D')
  retraction_section : forall d, retraction (section' d) = d

/-- **Scott 1972, Corollary 1.6.** Injective spaces are exactly retracts of powers of  $\mathbb{0}$ . -/
theorem corollary_1_6 (D : Type u) [TopologicalSpace D] [TOSpace D] :
  IsInjectiveSpace.{u,u} D <-> exists (? : Type u), Nonempty (IsRetractSubspace D (? ->
  Prop)) := by
  constructor
  * intro hD
    obtain <r, hr> := hD (productOfMemOpens D) (proposition_1_5 D).2 (ContinuousMap.id D)
    refine <Opens D, <<productOfMemOpens D, (proposition_1_5 D).2, r, hr>>>
  * rintro <?, <R>>
    exact IsInjectiveSpace.of_retract (isInjectiveSpace_sierpinski_power ?) R.section' R.
    retraction
    R.retraction_section

/-- **Scott 1972, Corollary 1.7.** A space is injective iff it is a retract of every
super-space of which it is a subspace. -/
theorem corollary_1_7 (D : Type u) [TopologicalSpace D] [TOSpace D] :
  IsInjectiveSpace.{u,u} D <->
  forall {Y : Type u} [TopologicalSpace Y] (e : D -> Y), IsEmbedding e ->
  exists r : C(Y, D), forall d, r (e d) = d := by
  constructor
  * intro hD Y _ e he
    obtain <r, hr> := hD e he (ContinuousMap.id D)
    exact <r, hr>
  * intro hD
    obtain <r, hr> := hD (productOfMemOpens D) (proposition_1_5 D).2
    exact IsInjectiveSpace.of_retract (isInjectiveSpace_sierpinski_power (Opens D))
      (productOfMemOpens D) r hr

```

A.6 vendor/scott1972/Scott1972/ContinuousLattice/InverseLimits.lean

602 lines.

Lean 4 source (lines 1–400)

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
Github: https://github.com/catskillsresearch/scott1972
-/

```

```

import Scott1972.ContinuousLattice.Constructions
import Scott1972.ContinuousLattice.FunctionSpaces
import Mathlib.Order.GaloisConnection.Basic

/-!
# Inverse limits of continuous lattices (Scott 1972, S4)

We formalize Scott's Proposition 4.1: the inverse limit  $D_\infty$  of an  $\omega$ -system of
continuous
lattices  $\langle D_n, j_n \rangle$  with each  $j_n : D_{n+1} \rightarrow D_n$  a projection is again a continuous
lattice.

Scott proves this through injectivity ( $D_\infty$  is an injective  $T_0$ -space, hence -- Theorem
2.12 -- a
continuous lattice), using the maximal-extension Proposition 3.8 and the compatibility Lemma
3.9.
The retraction of  $D_\infty$  onto  $D_\infty$  that Scott's argument constructs (extend the
identity of
 $D_\infty$  along its inclusion) is realized here order-theoretically and without topology:

* each projection  $j_n = (P\ n).retr$  is the upper adjoint of its embedding  $i_n = (P\ n).incl$ 
(projection_galoisConnection), hence preserves arbitrary infima;
* therefore the compatibility predicate is closed under pointwise  $sInf$ , making  $D_\infty$  a
complete
lattice (completeLatticeOfInf);
* the inclusion  $D_\infty \hookrightarrow D_n$  preserves infima, so it has a left adjoint  $r : D_n \rightarrow D_\infty$ 
(invLimRetr); a left adjoint preserves all suprema, in particular directed ones, so  $r$  is
Scott-continuous, and  $r \circ incl = id$ .

Thus  $D_\infty$  is a (Scott-continuous) retract of the continuous lattice  $D_n$  (Prop 2.9a),
so by
Prop 2.10a it is a continuous lattice. This is exactly the retraction Scott builds via
injectivity,
obtained here as the adjoint of the inclusion.
-/

namespace Scott1972.ContinuousLattice

open Set

universe u

section InverseLimit

variable (D : Nat → Type u) [forall n, CompleteLattice (D n)]
variable (P : forall n, IsContinuousLatticeProjection (D n) (D (n + 1)))

/-- The embedding-projection pair of a projection is a Galois connection  $i_n \dashv j_n$ :
from
 $j_n \circ incl = id$  and  $i_n \circ retr \sqsubseteq id$  we get  $i_n x \sqsubseteq y \leftrightarrow x \sqsubseteq j_n y$ . In particular  $j_n$  (the upper
adjoint) preserves arbitrary infima. -/
theorem projection_galoisConnection (n : Nat) :
  GaloisConnection ((P n).incl : D n → D (n + 1)) ((P n).retr : D (n + 1) → D n) := by
  intro x y
  constructor
  * intro h
    have h' := (P n).retr.monotone h
    rwa [(P n).retr_incl] at h'
  * intro h
    exact le_trans ((P n).incl.monotone h) ((P n).incl_retr_le y)

```

```

/-- Compatibility of a sequence: `j_n(x_{n+1}) = x_n` for all `n`. -/
def Compatible (x : forall n, D n) : Prop := forall n, (P n).retr (x (n + 1)) = x n

/-- **Scott 1972, S4.** The inverse limit `D_ inf` as the subspace of compatible sequences. -/
abbrev InverseLimit : Type u := {x : forall n, D n // Compatible D P x}

/-- `j_n` preserves arbitrary infima (it is the upper adjoint of `i_n`). -/
theorem retr_sInf (n : Nat) (A : Set (D (n + 1))) :
  (P n).retr (sInf A) = sInf ((P n).retr '' A) := by
  rw [(projection_galoisConnection D P n).u_sInf, sInf_image]

/-- The pointwise infimum of compatible sequences is compatible. -/
theorem compatible_sInf (S : Set (InverseLimit D P)) :
  Compatible D P (sInf (Subtype.val '' S)) := by
  intro n
  rw [sInf_apply_eq_sInf_image, sInf_apply_eq_sInf_image, retr_sInf]
  congr 1
  rw [Set.image_image]
  exact Set.image_congr (by rintro _ <x, _, rfl>; exact x.2 n)

noncomputable instance : InfSet (InverseLimit D P) :=
  <fun S => <sInf (Subtype.val '' S), compatible_sInf D P S>>

theorem coe_sInf (S : Set (InverseLimit D P)) :
  ((sInf S : InverseLimit D P) : forall n, D n) = sInf (Subtype.val '' S) := rfl

theorem isGLB_sInf' (S : Set (InverseLimit D P)) : IsGLB S (sInf S) := by
  constructor
  * intro x hx
    refine Subtype.coe_le_coe.mp ?_
    rw [coe_sInf]
    exact sInf_le (Set.mem_image_of_mem _ hx)
  * intro b hb
    refine Subtype.coe_le_coe.mp ?_
    rw [coe_sInf]
    refine le_sInf ?_
    rintro _ <x, hx, rfl>
    exact Subtype.coe_le_coe.mpr (hb hx)

noncomputable instance instCompleteLattice : CompleteLattice (InverseLimit D P) :=
  completeLatticeOfInf (InverseLimit D P) (isGLB_sInf' D P)

/-- For a directed, nonempty family, the inverse-limit supremum is computed pointwise (each `j_n` is Scott-continuous, so the pointwise sup of compatible sequences is compatible and is the least upper bound in `D_ inf`). -/
theorem coe_sSup_of_directed (S : Set (InverseLimit D P)) (hSne : S.Nonempty)
  (hSdir : DirectedOn (* <= *) S) :
  ((sSup S : InverseLimit D P) : forall n, D n) = sSup (Subtype.val '' S) := by
  have hcompat : Compatible D P (sSup (Subtype.val '' S)) := by
    intro n
    rw [sSup_apply_eq_sSup_image, sSup_apply_eq_sSup_image]
    set A : Set (D (n + 1)) := (fun f : forall m, D m => f (n + 1)) '' (Subtype.val '' S) with
      hA
    have hAne : A.Nonempty := (hSne.image _).image _
    have hAdir : DirectedOn (* <= *) A := by
      rintro _ <_, <x, hxS, rfl>, rfl> _ <_, <y, hyS, rfl>, rfl>
      obtain <z, hzS, hxz, hyz> := hSdir x hxS y hyS
      exact <z.1 (n + 1), <z.1, <z, hzS, rfl>, rfl>, hxz (n + 1), hyz (n + 1)>
    rw [(P n).retr.preservesDirectedSup_coe A hAne hAdir]
  congr 1

```

```

    rw [hA, Set.image_image]
    exact Set.image_congr (by rintro _ <x, _, rfl>; exact x.2 n)
  set p : InverseLimit D P := <sSup (Subtype.val ' S), hcompat> with hp
  have hLUB : IsLUB S p := by
    constructor
    * intro x hx
      refine Subtype.coe_le_coe.mp ?_
      exact le_sSup (Set.mem_image_of_mem _ hx)
    * intro b hb
      refine Subtype.coe_le_coe.mp ?_
      refine sSup_le ?_
      rintro _ <x, hx, rfl>
      exact Subtype.coe_le_coe.mpr (hb hx)
  rw [(isLUB_sSup S).unique hLUB]

/-- The inclusion `D_inf` preserves directed suprema. -/
theorem incl_preservesDirectedSup :
  PreservesDirectedSup (Subtype.val : InverseLimit D P -> forall n, D n) := by
  intro S hSne hSdir
  exact coe_sSup_of_directed D P S hSne hSdir

/-- Scott's retraction `r : ? D_n -> D_inf`, realized as the left adjoint of the
inclusion:
`r y = sqcap { x in D_inf : y sqsub x }`, the least compatible sequence above `y`. -/
noncomputable def invLimRetr (y : forall n, D n) : InverseLimit D P :=
  sInf {x : InverseLimit D P | y <= x.1}

theorem le_coe_invLimRetr (y : forall n, D n) : y <= (invLimRetr D P y).1 := by
  rw [invLimRetr, coe_sInf]
  refine le_sInf ?_
  rintro _ <x, hx, rfl>
  exact hx

/-- `r` dashv `incl` : the retraction is left adjoint to the inclusion. -/
theorem invLimRetr_galoisConnection :
  GaloisConnection (invLimRetr D P) (Subtype.val : InverseLimit D P -> forall n, D n) :=
  by
  intro y x
  constructor
  * intro h
    exact le_trans (le_coe_invLimRetr D P y) (Subtype.coe_le_coe.mpr h)
  * intro h
    exact sInf_le (show x in {x' : InverseLimit D P | y <= x'.1} from h)

/-- The retraction preserves directed suprema (a left adjoint preserves all suprema). -/
theorem invLimRetr_preservesDirectedSup :
  PreservesDirectedSup (invLimRetr D P) := by
  intro S _ _
  rw [(invLimRetr_galoisConnection D P).l_sSup, sSup_image]

/-- `r` comp `incl` = id : the retraction fixes `D_inf`. -/
theorem invLimRetr_incl (x : InverseLimit D P) : invLimRetr D P x.1 = x := by
  refine le_antisymm ?_ ?_
  * exact sInf_le (show x in {x' : InverseLimit D P | (x.1 : forall n, D n) <= x'.1} from
    le_refl x.1)
  * refine le_sInf ?_
    intro x' hx'
    exact Subtype.coe_le_coe.mp hx'

/-- `D_inf` is a Scott-continuous retract of the product `? D_n`. -/
noncomputable def inverseLimitRetraction :
  IsContinuousLatticeRetraction (InverseLimit D P) (forall n, D n) where
  incl := <Subtype.val, continuous_of_preservesDirectedSup (incl_preservesDirectedSup D P)>

```

```

retr := <invLimRetr D P, continuous_of_preservesDirectedSup (invLimRetr_preservesDirectedSup
  D P)>
retr_incl := invLimRetr_incl D P

/-- **Scott 1972, Proposition 4.1.** The inverse limit `D_inf` of an  $\omega$ -system of continuous
  lattices
  with projection bonding maps is itself a continuous lattice. The product  $\prod D_n$  is a
  continuous
  lattice (Prop 2.9a) and `D_inf` is a retract of it (`inverseLimitRetraction`), so Prop 2.10a
  applies. -/
theorem proposition_4_1 (hD : forall n, IsContinuousLattice (D n)) :
  IsContinuousLattice (InverseLimit D P) :=
  proposition_2_10_a (inverseLimitRetraction D P) (proposition_2_9_a D hD)

/-! ### Proposition 4.2: the maps `j_{inf n}` are projections

We construct Scott's embeddings `i_{inf n} : D_n -> D_inf` and show that `

```



```

simp only [projLE]
rw [Nat.leRecOn_succ (C := fun k => D k -> D m) h1]

theorem projLE_mono {m n : Nat} (h : m <= n) {x y : D n} (hxy : x <= y) :
  projLE D P h x <= projLE D P h y := by
  induction n, h using Nat.le_induction with
  | base =>
    rw [projLE_self, projLE_self]
    exact hxy
  | succ k hk ih =>
    rw [projLE_succ D P hk (Nat.le_succ_of_le hk), projLE_succ D P hk (Nat.le_succ_of_le hk)]
    exact ih ((P k).retr.monotone hxy)

/-- Peeling the last projection: `(P m).retr comp projLE (m+1 <= n) = projLE (m <= n)` -/
theorem projLE_retr {m : Nat} : forall {n : Nat} (h : m + 1 <= n) (x : D n),
  (P m).retr (projLE D P h x) = projLE D P (Nat.le_of_succ_le h) x := by
  intro n h
  induction n, h using Nat.le_induction with
  | base =>
    intro x
    rw [projLE_succ D P (le_refl m) (Nat.le_of_succ_le (le_refl (m + 1))) x]
    simp only [projLE_self]
  | succ k hk ih =>
    intro x
    rw [projLE_succ D P hk (Nat.le_succ_of_le hk) x, ih ((P k).retr x),
        projLE_succ D P (Nat.le_of_succ_le hk) (Nat.le_of_succ_le (Nat.le_succ_of_le hk)) x]

/-- Scott's embedding component `i_{n inf }(x)_m`: climb for `m >= n`, descend for `m < n`. -/
def iComp (n : Nat) (x : D n) (m : Nat) : D m :=
  if h : n <= m then embLE D P h x else projLE D P (le_of_lt (not_le.mp h)) x

theorem iComp_of_le {n m : Nat} (h : n <= m) (x : D n) : iComp D P n x m = embLE D P h x :=
  dif_pos h

theorem iComp_of_ge {n m : Nat} (h : not n <= m) (x : D n) :
  iComp D P n x m = projLE D P (le_of_lt (not_le.mp h)) x :=
  dif_neg h

theorem iComp_self (n : Nat) (x : D n) : iComp D P n x n = x := by
  rw [iComp_of_le D P (le_refl n), embLE_self]

/-- The sequence `i_{n inf }(x)` is compatible, hence a genuine point of `D_inf`. -/
theorem iComp_compatible (n : Nat) (x : D n) : Compatible D P (iComp D P n x) := by
  intro m
  by_cases h1 : n <= m
  * rw [iComp_of_le D P h1, iComp_of_le D P (Nat.le_succ_of_le h1),
        embLE_succ D P h1 (Nat.le_succ_of_le h1), (P m).retr_incl]
  * by_cases h2 : n <= m + 1
    * have hn : n = m + 1 := le_antisymm h2 (not_le.mp h1)
      subst hn
      rw [iComp_of_le D P (le_refl (m + 1)), embLE_self, iComp_of_ge D P h1,
          projLE_succ D P (le_refl m) (le_of_lt (not_le.mp h1)) x, projLE_self]
    * rw [iComp_of_ge D P h2, iComp_of_ge D P h1,
          projLE_retr D P (le_of_lt (not_le.mp h2)) x]

/-- For a compatible sequence `y`, descending from level `n` to `m <= n` recovers `y`. -/
theorem projLE_compatible {m : Nat} (y : InverseLimit D P) :
  forall {n : Nat} (h : m <= n), projLE D P h (y.1 n) = y.1 m := by
  intro n h
  induction n, h using Nat.le_induction with
  | base => rw [projLE_self]

```

```

| succ k hk ih => rw [projLE_succ D P hk (Nat.le_succ_of_le hk), y.2 k, ih]

/-- For a compatible sequence `y`, climbing `y_n` up to level `m >= n` stays below `y?`. -/
theorem embLE_le {n : Nat} (y : InverseLimit D P) {m : Nat} (h : n <= m) :
  embLE D P h (y.1 n) <= y.1 m := by
  induction m, h using Nat.le_induction with
  | base => exact le_of_eq (embLE_self D P _ _)
  | succ k hk ih =>
    rw [embLE_succ D P hk (Nat.le_succ_of_le hk)]
    calc (P k).incl (embLE D P hk (y.1 n))
      <= (P k).incl (y.1 k) := (P k).incl.monotone ih
      _ = (P k).incl ((P k).retr (y.1 (k + 1))) := by rw [y.2 k]
      _ <= y.1 (k + 1) := (P k).incl_retr_le _

/-- `i_{n inf }(y_n) sqsub y` coordinatewise (the heart of `incl_retr_le` for `j_{ inf n}`). -/
theorem iComp_incl_le (n : Nat) (y : InverseLimit D P) (m : Nat) :
  iComp D P n (y.1 n) m <= y.1 m := by
  by_cases h : n <= m
  * rw [iComp_of_le D P h]; exact embLE_le D P y h
  * rw [iComp_of_ge D P h]
    exact le_of_eq (projLE_compatible D P y (le_of_lt (not_le.mp h)))

/-- The tower of embeddings is Scott-continuous (a composite of the `i?`). -/
theorem embLE_preservesDirectedSup {n m : Nat} (h : n <= m) :
  PreservesDirectedSup (embLE D P h) := by
  induction m, h using Nat.le_induction with
  | base =>
    have hid : embLE D P (le_refl n) = id := funext (fun x => embLE_self D P (le_refl n) x)
    rw [hid]; intro S _ _; simp
  | succ k hk ih =>
    have hfun : embLE D P (Nat.le_succ_of_le hk)
      = (fun y : D k => (P k).incl y) comp embLE D P hk :=
      funext (fun x => embLE_succ D P hk (Nat.le_succ_of_le hk) x)
    rw [hfun]
    exact ScottMap.preservesDirectedSup_comp
      (fun S hS hd => (P k).incl.preservesDirectedSup_coe S hS hd) ih

/-- The tower of projections is Scott-continuous (a composite of the `j?`). -/
theorem projLE_preservesDirectedSup {m n : Nat} (h : m <= n) :
  PreservesDirectedSup (projLE D P h) := by
  induction n, h using Nat.le_induction with
  | base =>
    have hid : projLE D P (le_refl m) = id := funext (fun x => projLE_self D P (le_refl m) x)
    rw [hid]; intro S _ _; simp
  | succ k hk ih =>
    have hfun : projLE D P (Nat.le_succ_of_le hk)
      = projLE D P hk comp (fun z : D (k + 1) => (P k).retr z) :=
      funext (fun x => projLE_succ D P hk (Nat.le_succ_of_le hk) x)
    rw [hfun]
    exact ScottMap.preservesDirectedSup_comp ih
      (fun S hS hd => (P k).retr.preservesDirectedSup_coe S hS hd)

theorem iComp_preservesDirectedSup (n m : Nat) :
  PreservesDirectedSup (fun x : D n => iComp D P n x m) := by
  by_cases h : n <= m
  * have hfun : (fun x : D n => iComp D P n x m) = embLE D P h :=
    funext (fun x => iComp_of_le D P h x)
    rw [hfun]; exact embLE_preservesDirectedSup D P h
  * have hfun : (fun x : D n => iComp D P n x m) = projLE D P (le_of_lt (not_le.mp h)) :=
    funext (fun x => iComp_of_ge D P h x)
    rw [hfun]; exact projLE_preservesDirectedSup D P _

```

```

theorem iComp_monotone (n m : Nat) : Monotone (fun x : D n => iComp D P n x m) :=
  preservesDirectedSup_monotone (iComp_preservesDirectedSup D P n m)

/-- The embedding `i_{n inf } : D_n -> D_inf` as a bare function into the inverse limit. -/
def embInfFun (n : Nat) (x : D n) : InverseLimit D P := <iComp D P n x, iComp_compatible D P n
  x>

@[simp] theorem embInfFun_coe (n : Nat) (x : D n) : (embInfFun D P n x).1 = iComp D P n x :=
  rfl

theorem embInf_monotone (n : Nat) : Monotone (embInfFun D P n) := by
  intro x x' hxx
  rw [ <- Subtype.coe_le_coe]
  intro m
  exact iComp_monotone D P n m hxx

theorem embInf_preservesDirectedSup (n : Nat) : PreservesDirectedSup (embInfFun D P n) := by
  intro S hS hSdir
  have hTne : (embInfFun D P n '' S).Nonempty := hS.image _
  have hTdir : DirectedOn (* <= *) (embInfFun D P n '' S) := by
    rintro _ <a, ha, rfl> _ <b, hb, rfl>
    obtain <c, hc, hac, hbc> := hSdir a ha b hb
    exact <embInfFun D P n c, Set.mem_image_of_mem _ hc,
      embInf_monotone D P n hac, embInf_monotone D P n hbc>
  apply Subtype.ext
  rw [coe_sSup_of_directed D P (embInfFun D P n '' S) hTne hTdir]
  funext m
  have heq : Function.eval m '' (Subtype.val '' (embInfFun D P n '' S))
    = (fun x => iComp D P n x m) '' S := by
    simp only [Set.image_image, embInfFun_coe, Function.eval]
  rw [sSup_apply_eq_sSup_image, heq]
  exact iComp_preservesDirectedSup D P n m hS hSdir

/-- The projection `j_{ inf n} : D_inf -> D_n` as a bare function. -/
def projInfFun (n : Nat) (y : InverseLimit D P) : D n := y.1 n

theorem eval_preservesDirectedSup (n : Nat) : PreservesDirectedSup (projInfFun D P n) := by
  intro S hS hSdir
  have hL : (sSup S : InverseLimit D P).1 n = sSup ((fun y : InverseLimit D P => y.1 n) '' S)
    := by
    rw [coe_sSup_of_directed D P S hS hSdir, sSup_apply_eq_sSup_image]
    congr 1
    rw [Set.image_image]
  exact hL

/-- The embedding `i_{n inf } : D_n -> D_inf`, Scott-continuous. -/
noncomputable def embInf (n : Nat) : ScottMap (D n) (InverseLimit D P) :=
  <embInfFun D P n, continuous_of_preservesDirectedSup (embInf_preservesDirectedSup D P n)>

```

Lean 4 source (lines 401–602)

```

/-- The projection `j_{ inf n} : D_inf -> D_n`, Scott-continuous. -/
noncomputable def projInf (n : Nat) : ScottMap (InverseLimit D P) (D n) :=
  <projInfFun D P n, continuous_of_preservesDirectedSup (eval_preservesDirectedSup D P n)>

/-- **Scott 1972, Proposition 4.2.** Each `j_{ inf n} : D_inf -> D_n` is a projection of
  continuous
  lattices, with embedding `i_{n inf } = embInf n`. -/
noncomputable def proposition_4_2 (n : Nat) :
  IsContinuousLatticeProjection (D n) (InverseLimit D P) where
  incl := embInf D P n
  retr := projInf D P n
  retr_incl x := iComp_self D P n x

```

```

incl_retr_le y := by
  rw [ <- Subtype.coe_le_coe]
  intro m
  exact iComp_incl_le D P n y m

/-- **Scott 1972, S4 (recursion equation).**  $i_{\{n \text{ inf } \}} = i_{\{(n+1) \text{ inf } \}} \text{ comp } i_n$ . -/
theorem embInf_succ (n : Nat) (x : D n) :
  embInf D P (n + 1) ((P n).incl x) = embInf D P n x := by
  apply Subtype.ext
  funext m
  show iComp D P (n + 1) ((P n).incl x) m = iComp D P n x m
  by_cases h1 : n <= m
  * by_cases h2 : n + 1 <= m
    * rw [iComp_of_le D P h2, iComp_of_le D P h1, embLE_succ_left D P h1 h2]
    * have hmn : m = n := le_antisymm (Nat.lt_succ_iff.mp (not_le.mp h2)) h1
      subst hmn
      rw [iComp_self, iComp_of_ge D P h2,
        projLE_succ D P (le_refl m) (le_of_lt (not_le.mp h2)) ((P m).incl x),
        projLE_self, (P m).retr_incl]
    * have h2 : not n + 1 <= m := fun h => h1 (le_trans (Nat.le_succ n) h)
      rw [iComp_of_ge D P h2, iComp_of_ge D P h1,
        projLE_succ D P (le_of_lt (not_le.mp h1)) (le_of_lt (not_le.mp h2)) ((P n).incl x),
        (P n).retr_incl]

/-- The family  $n \mapsto i_{\{n \text{ inf } \}}(x_n)$  is monotone (the lub defining  $x$  is monotone). -/
theorem embInf_le_succ (x : InverseLimit D P) (n : Nat) :
  embInf D P n (x.1 n) <= embInf D P (n + 1) (x.1 (n + 1)) := by
  rw [ <- embInf_succ D P n (x.1 n)]
  exact embInf_monotone D P (n + 1)
  (by calc (P n).incl (x.1 n) = (P n).incl ((P n).retr (x.1 (n + 1))) := by rw [x.2 n]
    _ <= x.1 (n + 1) := (P n).incl_retr_le _)

theorem embInf_family_directed (x : InverseLimit D P) :
  DirectedOn (* <= *) (Set.range (fun n => embInf D P n (x.1 n))) :=
  directedOn_range.2 (monotone_nat_of_le_succ (embInf_le_succ D P x)).directed_le

/-- **Scott 1972, S4.** Each  $x$  in  $D_{\text{inf}}$  is the (monotone) lub of its projections:
 $x = \text{bigcup}_n i_{\{n \text{ inf } \}}(x_n)$ . -/
theorem inverseLimit_eq_iSup (x : InverseLimit D P) :
  x = bigcup n, embInf D P n (x.1 n) := by
  have hdir := embInf_family_directed D P x
  have hne : (Set.range (fun n => embInf D P n (x.1 n))).Nonempty := Set.range_nonempty _
  refine le_antisymm ?_ ?_
  * rw [ <- Subtype.coe_le_coe]
    have hcoe : ((bigcup n, embInf D P n (x.1 n)) : InverseLimit D P).1
      = sSup (Subtype.val '' Set.range (fun n => embInf D P n (x.1 n))) := by
      rw [ <- sSup_range]
      exact coe_sSup_of_directed D P _ hne hdir
    rw [hcoe]
    intro m
    have hmem : (embInf D P m (x.1 m)).1
      in Subtype.val '' Set.range (fun n => embInf D P n (x.1 n)) :=
      <embInf D P m (x.1 m), <m, rfl>, rfl>
    have hle := (le_sSup hmem) m
    rwa [show (embInf D P m (x.1 m)).1 m = x.1 m from iComp_self D P m (x.1 m)] at hle
  * exact iSup_le fun n => by
    rw [ <- Subtype.coe_le_coe]; intro m; exact iComp_incl_le D P n x m

/-- **Scott 1972, S4 (functional equation, "the remark following 4.2").** The identity of  $D_{\text{inf}}$ 
is
the directed lub of the approximating projections  $r_n = i_{\{n \text{ inf } \}} \text{ comp } j_{\{\text{inf } n\}}$ :
 $\text{id} = \text{bigcup}_n i_{\{n \text{ inf } \}} \text{ comp } j_{\{\text{inf } n\}}$ . This is the algebraic identity at the heart of
Theorem 4.4. -/

```

```

theorem idInf_eq_iSup :
  (ScottMap.idMap : ScottMap (InverseLimit D P) (InverseLimit D P))
    = bigcup n, (embInf D P n).comp (projInf D P n) := by
  apply ScottMap.ext
  intro x
  rw [show ( bigcup n, (embInf D P n).comp (projInf D P n))
      = sSup (Set.range fun n => (embInf D P n).comp (projInf D P n)) from sSup_range.symm,
      ScottMap.sSup_apply, ScottMap.idMap_apply, <- Set.range_comp, sSup_range]
  exact inverseLimit_eq_iSup D P x

/-- **Scott 1972, Lemma 4.5.** A criterion for recognizing projections out of the limit: if a
sequence `u : forall n, D_{n+1}` satisfies the (shifted) recursion `j_{n+1}(u_{n+2}) = u_{n+1}`, then the
monotone limit `u_inf = bigcup_n i_{(n+1) inf }(u_n)` has `j_{inf (n+1)}(u_inf) = u_inf`.

Proof: extend `u` to a *compatible* sequence `w` (`w_0 = j_0(u_0)`, `w_{k+1} = u_k`); then `w`
is a
point of `D_inf`, and since the family `k |> i_{k inf }(w_k)` is monotone, dropping its
`0`-th term does
not change the lub (`Monotone.iSup_nat_add`), so `u_inf = bigcup ? i_{k inf }(w_k) = w` by
`inverseLimit_eq_iSup`.
Hence `j_{inf (n+1)}(u_inf) = w_{n+1} = u_n`. -/
theorem lemma_4_5 (u : forall n, D (n + 1))
  (hu : forall n, (P (n + 1)).retr (u (n + 1)) = u n) (n : Nat) :
  ( bigcup k, embInf D P (k + 1) (u k) : InverseLimit D P).1 (n + 1) = u n := by
  have hw : Compatible D P (fun k => Nat.casesOn k ((P 0).retr (u 0)) (fun m => u m)) := by
    intro k
    cases k with
    | zero => rfl
    | succ m => exact hu m
  set wlim : InverseLimit D P :=
    <fun k => Nat.casesOn k ((P 0).retr (u 0)) (fun m => u m), hw> with hwlim
  have hGmono : Monotone (fun k => embInf D P k (wlim.1 k)) :=
    monotone_nat_of_le_succ (embInf_le_succ D P wlim)
  have hsup : ( bigcup k, embInf D P (k + 1) (u k) : InverseLimit D P) = wlim := by
    have h1 : ( bigcup k, embInf D P (k + 1) (u k) : InverseLimit D P)
      = bigcup k, embInf D P (k + 1) (wlim.1 (k + 1)) := rfl
    rw [h1, Monotone.iSup_nat_add hGmono 1, <- inverseLimit_eq_iSup D P wlim]
  rw [hsup]

/-! ### Corollary 4.3: `D_inf` is also the *direct* limit

Given continuous `f_n : D_n -> D'` into any complete lattice with `f_n = f_{n+1} comp i_n`,
the map
`f_inf (x) = bigcup_n f_n(x_n)` is the unique continuous mediating map with `f_n = f_inf
comp i_{n inf }`. -/

variable {D' : Type*} [CompleteLattice D']

/-- The mediating map of Corollary 4.3: `f_inf (x) = bigcup_n f_n(x_n)`. -/
def coconeInf (f : forall n, ScottMap (D n) D') (x : InverseLimit D P) : D' :=
  bigcup n, f n (x.1 n)

theorem coconeInf_apply (f : forall n, ScottMap (D n) D') (x : InverseLimit D P) :
  coconeInf D P f x = bigcup n, f n (x.1 n) := rfl

/-- Climbing then applying `f` is constant: `f_m(i_{m-1}...i_n x) = f_n(x)`. -/
theorem coconeInf_climb (f : forall n, ScottMap (D n) D')
  (hf : forall n x, f n x = f (n + 1) ((P n).incl x)) {n : Nat} (x : D n) :
  forall {m : Nat} (h : n <= m), f m (embLE D P h x) = f n x := by
  intro m h
  induction m, h using Nat.le_induction with
  | base => rw [embLE_self]

```

```

| succ k hk ih => rw [embLE_succ D P hk (Nat.le_succ_of_le hk), <- hf k, ih]

/-- Descending then applying `f` only decreases: `f_m(j_m...j_{n-1} x) sqsub f_n(x)` -/
theorem coconeInf_descend (f : forall n, ScottMap (D n) D')
  (hf : forall n x, f n x = f (n + 1) ((P n).incl x)) {m : Nat} :
  forall {n : Nat} (h : m <= n) (x : D n), f m (projLE D P h x) <= f n x := by
  intro n h
  induction n, h using Nat.le_induction with
  | base => intro x; exact le_of_eq (congrArg (f m) (projLE_self D P (le_refl m) x))
  | succ k hk ih =>
    intro x
    rw [projLE_succ D P hk (Nat.le_succ_of_le hk)]
    calc f m (projLE D P hk ((P k).retr x)) <= f k ((P k).retr x) := ih ((P k).retr x)
      _ = f (k + 1) ((P k).incl ((P k).retr x)) := hf k _
      _ <= f (k + 1) x := (f (k + 1)).monotone ((P k).incl_retr_le x)

/-- **Scott 1972, Corollary 4.3 (factorization).** `f_n = f inf comp i_{n inf}` -/
theorem coconeInf_comp_embInf (f : forall n, ScottMap (D n) D')
  (hf : forall n x, f n x = f (n + 1) ((P n).incl x)) (n : Nat) (x : D n) :
  coconeInf D P f (embInf D P n x) = f n x := by
  apply le_antisymm
  * show (bigcup m, f m ((embInf D P n x).1 m)) <= f n x
    refine iSup_le fun m => ?_
    show f m (iComp D P n x m) <= f n x
    by_cases h : n <= m
    * rw [iComp_of_le D P h]; exact le_of_eq (coconeInf_climb D P f hf x h)
    * rw [iComp_of_ge D P h]; exact coconeInf_descend D P f hf (le_of_lt (not_le.mp h)) x
  * refine le_trans (le_of_eq ?_) (le_iSup (fun m => f m ((embInf D P n x).1 m)) n)
    rw [show (embInf D P n x).1 n = x from iComp_self D P n x]

/-- `f inf` is Scott-continuous: `f inf (sqsup S) = sqsup f inf (S)` for directed `S` (each
`f_n` is continuous and a
double `bigcup` over `Nat x S` commutes). -/
theorem coconeInf_preservesDirectedSup (f : forall n, ScottMap (D n) D') :
  PreservesDirectedSup (coconeInf D P f) := by
  intro S hS hSdir
  have hev : forall n, DirectedOn (* <= *) ((fun s : InverseLimit D P => s.1 n) '' S) := by
  intro n
  rintro _ <a, ha, rfl> _ <b, hb, rfl>
  obtain <c, hc, hac, hbc> := hSdir a ha b hb
  exact <c.1 n, <c, hc, rfl>, hac n, hbc n>
  have key : forall n, f n ((sSup S).1 n) = sSup ((fun s : InverseLimit D P => f n (s.1 n)) '' S) := by
  intro n
  have h1 : (sSup S).1 n = sSup ((fun s : InverseLimit D P => s.1 n) '' S) :=
    eval_preservesDirectedSup D P n hS hSdir
  rw [h1, (f n).preservesDirectedSup_coe _ (hS.image _) (hev n), Set.image_image]
  show (bigcup n, f n ((sSup S).1 n)) = sSup (coconeInf D P f '' S)
  simp_rw [key, sSup_image', coconeInf_apply]
  rw [iSup_comm]

/-- **Scott 1972, Corollary 4.3.** Within complete lattices, `D_inf` is also the *direct*
limit of
the `D_n` along the embeddings `i_n`: for every compatible cocone `f_n : D_n -> D` (
continuous, with
`f_n = f_{n+1} comp i_n`) there is a **unique** continuous `f inf : D_inf -> D` with `
f_n = f inf comp i_{n inf}`,
namely `f inf (x) = bigcup_n f_n(x_n)` -/
theorem corollary_4_3 (f : forall n, ScottMap (D n) D')
  (hf : forall n x, f n x = f (n + 1) ((P n).incl x)) :
  exists ! g : ScottMap (InverseLimit D P) D', forall n x, f n x = g (embInf D P n x) := by
  refine <<coconeInf D P f,
    continuous_of_preservesDirectedSup (coconeInf_preservesDirectedSup D P f)>>, ?_, ?_>

```

```

* exact fun n x => (coconeInf_comp_embInf D P f hf n x).symm
* intro g hg
  ext x
  -- `g x = f inf x`, since `x = bigcup _n i_{n inf }(x_n)` and `g` is continuous on this
  directed family
  calc g x = g (bigcup _n, embInf D P n (x.1 n)) := by rw [ <- inverseLimit_eq_iSup D P x]
    _ = g (sSup (Set.range fun n => embInf D P n (x.1 n))) := by rw [sSup_range]
    _ = sSup (g '' Set.range fun n => embInf D P n (x.1 n)) :=
      g.preservesDirectedSup_coe _ (Set.range_nonempty _) (embInf_family_directed D P x)
    _ = bigcup _n, g (embInf D P n (x.1 n)) := by rw [ <- Set.range_comp, sSup_range]; rfl
    _ = bigcup _n, f n (x.1 n) := by simp_rw [ <- hg]

end InverseLimit

end Scott1972.ContinuousLattice

```

A.7 vendor/scott1972/Scott1972/ContinuousLattice/MilnerCorrection.lean

63 lines.

Lean 4 source

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
Github: https://github.com/catskillsresearch/scott1972
-/

import Scott1972.ContinuousLattice.Specialization

/-!
# March 1972 correction (Scott, pp. 135-136)

Robin Milner observed that Scott's remark before Proposition 2.5 was wrong: a  $T_0$ -topology
on a complete lattice need not have every open set Scott-open. The two extreme  $T_0$ -topologies
inducing the same partial order are generated by

*  $\{x \mid x \sqsubseteq_{\text{sub}} y\}$  (the lower subbasic sets), and
*  $\{x \mid y \sqsubseteq_{\text{sub}} x\}$  (principal up-sets).

The corrected proofs of Propositions **2.9**, **2.10**, and **3.3** assume the given
topology is contained in the Scott (lattice) topology: every open set of the given
topology is Scott-open.

For Proposition **2.10**, Scott distinguishes ambient joins in  $D'$  from subspace joins in
a retract  $D \subseteq_{\text{set}} D'$ : the prime in  $\sqsup S$  marks the index (join taken in  $D'$ ),
not a
"primed join" operator. The retraction identity used in the corrected argument is
 $j(\sqsup S) = \sqsup S$  for directed  $S \subseteq_{\text{set}} D'$  (see IsContinuousLatticeRetraction.
  retr_ambientSSup_eq_sSup
in FunctionSpaces.lean).

Page **136** adds that function spaces pose no subspace/sup mismatch: lubs are computed
pointwise, so the product (relativized) topology is contained in the Scott topology once
the Milner hypothesis is in place.
-/

namespace Scott1972.ContinuousLattice

open Set Topology

variable {D D' : Type*} [CompleteLattice D] [CompleteLattice D']

```

```

/-! ### Extreme `T_0`-topologies inducing the order -/

/-- Lower subbasic set `{x | x sqsubneq y}` from Scott's March 1972 correction. -/
def scottLowerSubbasisSet (y : D) : Set D :=
  { x | not x <= y }

/-- Upper subbasic set `{x | y sqsub x}` (principal up-set) from the correction. -/
def scottPrincipalUpSet (y : D) : Set D :=
  Set.Ici y

/-! ### Milner hypothesis for 2.9, 2.10, 3.3 -/

/-- **March 1972 correction.** The given topology `tau` is coarser than (or equal to) the Scott
topology: every set open in `tau` is Scott-open. Equivalently `Opens(tau) subseq Opens(
  Scott)`,
i.e. `scottTopologicalSpace <= tau` in mathlib's order on topologies. -/
def CoarserThanScottTopology (tau : TopologicalSpace D) : Prop :=
  scottTopologicalSpace <= tau

theorem scottOpen_of_coarserThanScott {tau : TopologicalSpace D} (htau :
  CoarserThanScottTopology tau)
  {U : Set D} (hU : @IsOpen D tau U) : ScottOpen U :=
  isOpen_iff_scottOpen.mp (htau U hU)

end Scott1972.ContinuousLattice

```

A.8 vendor/scott1972/Scott1972/ContinuousLattice/ScottMaps.lean

211 lines.

Lean 4 source

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
Github: https://github.com/catskillsresearch/scott1972
-/

import Scott1972.ContinuousLattice.Specialization
import Mathlib.Order.ScottContinuity
import Mathlib.Topology.Order.ScottTopology

/-!
# Scott-continuous maps (Scott 1972, S2.5-2.7)
-/

namespace Scott1972.ContinuousLattice

open Set Topology

variable {D D' D'' : Type*} [CompleteLattice D] [CompleteLattice D'] [CompleteLattice D'']

def PreservesDirectedSup (f : D -> D') : Prop :=
  forall ?S : Set D?, S.Nonempty -> DirectedOn (* <= *) S -> f (sSup S) = sSup (f '' S)

theorem preservesDirectedSup_monotone {f : D -> D'} (hf : PreservesDirectedSup f) :
  Monotone f := by
  intro x y hxy
  have hdir : DirectedOn (* <= *) ({x, y} : Set D) := directedOn_pair hxy
  have hS : ({x, y} : Set D).Nonempty := <x, Set.mem_insert _ _>

```



```

have hsup : sSup ({x, y} : Set D) = y := by
  calc sSup ({x, y} : Set D) = x sqsup y := sSup_pair
  _ = y := by apply le_antisymm; exact sup_le hxy le_rfl; exact le_sup_right
have heq := hf hS hdir
rw [hsup, Set.image_pair] at heq
exact le_trans (le_sSup (Set.mem_insert _ _)) heq.symm.le

theorem scottOpen_preimage {f : D -> D'} (hf : PreservesDirectedSup f) {U : Set D'}
  (hU : ScottOpen U) : ScottOpen (f ⁻¹' U) := by
  have hmono := preservesDirectedSup_monotone hf
  refine <fun a b hab ha => hU.1 (hmono hab) ha, fun S hS hSdir hmem => ?_>
  rw [Set.mem_preimage] at hmem
  have hmem' : sSup (f ⁻¹' S) in U := by rw [← hf hS hSdir]; exact hmem
  obtain <s, hsS, hsU> := hU.2 (Set.image_nonempty.2 hS)
  (fun s hs t ht => by
    obtain <a, haS, rfl> := hs
    obtain <b, hbS, rfl> := ht
    obtain <c, hcS, hac, hbc> := hSdir a haS b hbS
    exact <f c, Set.mem_image_of_mem f hcS, hmono hac, hmono hbc>) hmem'
  obtain <a, haS, rfl> := hsS
  exact <a, haS, Set.mem_preimage.2 hsU>

theorem continuous_of_preservesDirectedSup {f : D -> D'} (hf : PreservesDirectedSup f) :
  @Continuous D D' scottTopologicalSpace scottTopologicalSpace f := by
  rw [continuous_def]
  intro U hU
  rw [isOpen_iff_scottOpen] at hU |-
  exact scottOpen_preimage hf hU

theorem continuous_preservesDirectedSup {f : D -> D'}
  (hf : @Continuous D D' scottTopologicalSpace scottTopologicalSpace f) :
  PreservesDirectedSup f := by
  have hD : @IsScott D univ _ (Topology.scott D univ) :=
    @IsScott.mk D univ _ (Topology.scott D univ) rfl
  have hD' : @IsScott D' univ _ (Topology.scott D' univ) :=
    @IsScott.mk D' univ _ (Topology.scott D' univ) rfl
  have hsc : ScottContinuous f :=
    scottContinuousOn_univ.1 <|
      (@Topology.IsScott.scottContinuousOn_iff_continuous D D' _
        (Topology.scott D univ) _ (Topology.scott D' univ) hD' f univ hD
        (fun _ _ => trivial)).2 hf
  intro S hS hSdir
  exact (hsc hS hSdir (isLUB_sSup S)).sSup_eq.symm

/-- **Scott 1972, Proposition 2.5.** Scott continuity <-> preservation of directed suprema.
-/
theorem proposition_2_5 (f : D -> D') :
  (@Continuous D D' scottTopologicalSpace scottTopologicalSpace f) <->
  PreservesDirectedSup f :=
  <continuous_preservesDirectedSup, fun hf => continuous_of_preservesDirectedSup hf>

/-! ### Proposition 2.6 -/

/-- **Scott 1972, Proposition 2.6.** A function of several variables between complete lattices
  is
  (Scott-)continuous jointly iff it is continuous in each variable separately. Continuity is
  phrased
  as preservation of directed suprema (Proposition 2.5); it suffices to treat two variables, the
  product `D x D'` carrying the componentwise complete-lattice structure (whose induced
  topology is
  the product topology). -/
theorem proposition_2_6 (f : D x D' -> D'') :
  PreservesDirectedSup f <->

```

```

    (forall y, PreservesDirectedSup fun x => f (x, y)) /\
    (forall x, PreservesDirectedSup fun y => f (x, y)) := by
constructor
* -- joint continuity ? separate continuity (precompose with the continuous slice maps)
intro hf
refine <fun y S hS hSdir => ?_, fun x S hS hSdir => ?_>
* set T : Set (D x D') := (fun x => (x, y)) '' S with hT
  have hTne : T.Nonempty := hS.image _
  have hTdir : DirectedOn (* <= *) T := by
    rintro _ <a, ha, rfl> _ <b, hb, rfl>
    obtain <c, hc, hac, hbc> := hSdir a ha b hb
    exact <(c, y), Set.mem_image_of_mem _ hc, <hac, le_rfl>, <hbc, le_rfl>>
  have hfst : Prod.fst '' T = S := by rw [hT, Set.image_image]; simp
  have hsnd : Prod.snd '' T = {y} := by rw [hT, Set.image_image]; exact hS.image_const y
  have hsupT : sSup T = (sSup S, y) := by
    have e1 : (sSup T).1 = sSup S := by rw [Prod.fst_sSup, hfst]
    have e2 : (sSup T).2 = y := by rw [Prod.snd_sSup, hsnd, sSup_singleton]
    exact Prod.ext_iff.mpr <e1, e2>
  have h := hf hTne hTdir
  rw [hsupT, hT, Set.image_image] at h
  simp using h
* set T : Set (D x D') := (fun y => (x, y)) '' S with hT
  have hTne : T.Nonempty := hS.image _
  have hTdir : DirectedOn (* <= *) T := by
    rintro _ <a, ha, rfl> _ <b, hb, rfl>
    obtain <c, hc, hac, hbc> := hSdir a ha b hb
    exact <(x, c), Set.mem_image_of_mem _ hc, <le_rfl, hac>, <le_rfl, hbc>>
  have hfst : Prod.fst '' T = {x} := by rw [hT, Set.image_image]; exact hS.image_const x
  have hsnd : Prod.snd '' T = S := by rw [hT, Set.image_image]; simp
  have hsupT : sSup T = (x, sSup S) := by
    have e1 : (sSup T).1 = x := by rw [Prod.fst_sSup, hfst, sSup_singleton]
    have e2 : (sSup T).2 = sSup S := by rw [Prod.snd_sSup, hsnd]
    exact Prod.ext_iff.mpr <e1, e2>
  have h := hf hTne hTdir
  rw [hsupT, hT, Set.image_image] at h
  simp using h
* -- separate continuity ? joint continuity (Scott 1972's directedness argument)
rintro <h1, h2> Sstar hne hdir
have hmono1 : forall y, Monotone fun x => f (x, y) := fun y =>
preservesDirectedSup_monotone (h1 y)
have hmono2 : forall x, Monotone fun y => f (x, y) := fun x =>
preservesDirectedSup_monotone (h2 x)
have hmono : Monotone f := by
  rintro <a, b> <c, d> hpq
  exact le_trans (hmono1 b hpq.1) (hmono2 c hpq.2)
have hSne : (Prod.fst '' Sstar).Nonempty := hne.image _
have hS'ne : (Prod.snd '' Sstar).Nonempty := hne.image _
have hSdir : DirectedOn (* <= *) (Prod.fst '' Sstar) := hdir.fst
have hS'dir : DirectedOn (* <= *) (Prod.snd '' Sstar) := hdir.snd
have hsupStar : sSup Sstar = (sSup (Prod.fst '' Sstar), sSup (Prod.snd '' Sstar)) :=
  Prod.ext_iff.mpr <Prod.fst_sSup _, Prod.snd_sSup _>
apply le_antisymm
* rw [hsupStar]
  have e1 : f (sSup (Prod.fst '' Sstar), sSup (Prod.snd '' Sstar))
    = sSup ((fun x => f (x, sSup (Prod.snd '' Sstar))) '' (Prod.fst '' Sstar)) :=
    h1 (sSup (Prod.snd '' Sstar)) hSne hSdir
  rw [e1]
  apply sSup_le
  rintro _ <x, hx, rfl>
  show f (x, sSup (Prod.snd '' Sstar)) <= sSup (f '' Sstar)
  have e2 : f (x, sSup (Prod.snd '' Sstar))
    = sSup ((fun y => f (x, y)) '' (Prod.snd '' Sstar)) :=
    h2 x hS'ne hS'dir

```

```

    rw [e2]
    apply sSup_le
    rintro _ <y, hy, rfl>
    show f (x, y) <= sSup (f '' Sstar)
    obtain <p, hpS, hpfst> := hx
    obtain <q, hqS, hqsnd> := hy
    obtain <r, hrS, hpr, hqr> := hdir p hpS q hqS
    have hxr : x <= r.1 := hpfst |> hpr.1
    have hyr : y <= r.2 := hqsnd |> hqr.2
    calc f (x, y) <= f (r.1, r.2) := hmono <hxr, hyr>
    _ = f r := by rw [Prod.mk.eta]
    _ <= sSup (f '' Sstar) := le_sSup (Set.mem_image_of_mem f hrS)
* apply sSup_le
  rintro _ <p, hp, rfl>
  exact hmono (le_sSup hp)

/-! ### Proposition 2.7 -/

/-- **Scott 1972, Proposition 2.7 (join).** Binary join is Scott-continuous on every complete
lattice; this is the `sqsup` -part of Scott's 2.7. -/
theorem proposition_2_7_sup :
  @Continuous (D x D) D scottTopologicalSpace scottTopologicalSpace (fun p : D x D => p.1
    sqsup p.2) :=
  continuous_of_preservesDirectedSup <| by
    intro S hS hSdir
    simpa using (ScottContinuous.sup_2 (b := D) (d := S) hS hSdir (isLUB_sSup S)).sSup_eq.symm

theorem meet_preservesDirectedSup (x : D) (hD : IsContinuousLattice D) :
  PreservesDirectedSup (fun z => x sqcap z) := by
  intro S hS hSdir
  apply le_antisymm
  * have hle : sSup {t | t <= x sqcap sSup S} <= sSup (Set.image (fun z => x sqcap z) S)
    := by
    apply sSup_le
    intro t ht
    obtain <w, hwS, ht_w> := (wayBelow_sSup_iff hS hSdir).1 (ht.trans_le inf_le_right)
    have hmem : x sqcap w in Set.image (fun z : D => x sqcap z) S :=
      Set.mem_image_of_mem (fun z => x sqcap z) hwS
    have hbound : x sqcap w <= sSup (Set.image (fun z => x sqcap z) S) := le_sSup hmem
    exact (le_inf (ht.le.trans inf_le_left) ht_w.le).trans hbound
  dsimp only
  rw [← hD.sSup_wayBelow (x sqcap sSup S)]
  exact hle
* apply sSup_le
  intro z hz
  obtain <w, hwS, rfl> := hz
  exact inf_le_inf le_rfl (le_sSup hwS)

/-- **Scott 1972, Proposition 2.7 (meet, separate).** On a continuous lattice, `x |-> x
sqcap y`
and `y |-> x sqcap y` are Scott-continuous; Scott's full 2.7 also covers joint continuity
on the
product via Proposition 2.6. -/
theorem proposition_2_7_inf_left (hD : IsContinuousLattice D) (y : D) :
  @Continuous D D scottTopologicalSpace scottTopologicalSpace (fun x => x sqcap y) :=
  continuous_of_preservesDirectedSup <| by
    intro S' hS' hSdir'
    rw [show (fun x => x sqcap y) = fun z => y sqcap z from funext fun x => inf_comm x y]
    have h := meet_preservesDirectedSup y hD
    exact h (S := S') hS' hSdir'

theorem proposition_2_7_inf_right (hD : IsContinuousLattice D) (x : D) :
  @Continuous D D scottTopologicalSpace scottTopologicalSpace (fun y => x sqcap y) :=

```

```

continuous_of_preservesDirectedSup (meet_preservesDirectedSup x hD)

end Scott1972.ContinuousLattice

```

A.9 vendor/scott1972/Scott1972/ContinuousLattice/Specialization.lean

131 lines.

Lean 4 source

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
Github: https://github.com/catskillsresearch/scott1972
-/

import Scott1972.ContinuousLattice.WayBelow
import Mathlib.Topology.Inseparable
import Mathlib.Topology.Separation.Basic
import Mathlib.Topology.Order.ScottTopology
import Mathlib.Order.DirSupClosed

/-!
# Specialization order and Scott topology (Scott 1972, S2 opening)

Scott's S2 begins with the specialization order on a  $T_0$ -space and the induced (Scott)
topology on a complete lattice. Proposition 2.1 (monotone nets and least upper bounds) is
split into its two directions; the convergence-to-below direction is the mathematically
heavier half and is recorded as proposition_2_1_of_le.
-/

namespace Scott1972.ContinuousLattice

open Topology Set

universe u

variable {X D : Type*} [TopologicalSpace X] [CompleteLattice D]

/-! ### Specialization order -/

/-- **Scott 1972, S2.** The *specialization order*:  $x \sqsubseteq y$  when  $x$  in  $U$  open implies
 $y$  in  $U$ . -/
def SpecializationLe (x y : X) : Prop :=
  forall U, IsOpen U -> x in U -> y in U

instance specializationPreorder : Preorder X where
  le := SpecializationLe
  le_refl x := fun _ _ hx => hx
  le_trans x y z hxy hyz U hU hxU := hyz U hU (hxy U hU hxU)

theorem specializationLe_antisymm [TOSpace X] {x y : X}
  (hxy : SpecializationLe x y) (hyx : SpecializationLe y x) : x = y :=
  Inseparable.eq (inseparable_iff_specializes_and.2
    <specializes_iff_forall_open.2 fun s hs hy => hyx s hs hy,
    specializes_iff_forall_open.2 fun s hs hx => hxy s hs hx>)

/-! ### Scott topology from ScottOpen -/

/-- Scott's induced topology on a complete lattice, realized as mathlib's Scott topology. -/
@[reducible] noncomputable def scottTopologicalSpace : TopologicalSpace D :=

```

```

Topology.scott D univ

theorem ScottOpen_iff_dirSupInacc {U : Set D} : ScottOpen U <=> IsUpperSet U /\ DirSupInacc
  U := by
  constructor
  * intro <hU, hU'>
    refine <hU, fun d hd_1 hd_2 a ha hmem => ?_>
    rw [ <- IsLUB.sSup_eq ha] at hmem
    obtain <s, hs, hsU> := hU' hd_1 hd_2 hmem
    exact <s, hs, hsU>
  * intro <hU, hU'>
    refine <hU, fun d hd_1 hd_2 hmem => ?_>
    obtain <s, hs, hsU> := hU' hd_1 hd_2 (isLUB_sSup d) hmem
    exact <s, hs, hsU>

theorem isOpen_iff_scottOpen {U : Set D} : @IsOpen D scottTopologicalSpace U <=> ScottOpen U
  := by
  rw [ScottOpen_iff_dirSupInacc, scottTopologicalSpace]
  have hinst : @IsScott D univ _ (Topology.scott D univ) :=
    @IsScott.mk D univ _ (Topology.scott D univ) rfl
  simp [dirSupInaccOn_univ] using
    @IsScott.isOpen_iff_isUpperSet_and_dirSupInaccOn D univ _ (Topology.scott D univ) U hinst

/-- Scott-open sets in our sense agree with mathlib's Scott topology (alias). -/
theorem isOpen_scott_iff_scottOpen {U : Set D} :
  @IsOpen D (Topology.scott D univ) U <=> ScottOpen U :=
  isOpen_iff_scottOpen

/-! ### Monotone nets and Proposition 2.1 -/

variable {? : Type u} [Preorder ?] [IsDirected ? (* <= *)]

def IsMonotoneNet (x : ? -> D) : Prop :=
  Monotone x

def ScottConvergesTo (x : ? -> D) (y : D) : Prop :=
  forall U, ScottOpen U -> y in U -> exists i, forall j >= i, x j in U

variable {x : ? -> D} {L y : D}

/-- **Scott 1972, Proposition 2.1 (backward).** If `y <= L` and `L` is the lub of a monotone
net, then the net converges to `y` in the Scott topology. -/
theorem proposition_2_1_of_le [Nonempty ?] (hx : IsMonotoneNet x) (hL : IsLUB (range x) L)
  (hyL : y <= L) : ScottConvergesTo x y := by
  intro U hU hyU
  have hdir : DirectedOn (* <= *) (range x) := by
    rintro _ <i, rfl> _ <j, rfl>
    obtain <k, hik, hjk> := IsDirected.directed (r := (* <= *)) i j
    exact <x k, <k, rfl>, hx hik, hx hjk>
  have hLU : sSup (range x) in U := by
    rw [IsLUB.sSup_eq hL]
    exact hU.1 hyL hyU
  obtain <s, hsS, hsU> := hU.2 (Set.range_nonempty x) hdir hLU
  obtain <i_0, rfl> := hsS
  refine <i_0, fun j hj => hU.1 (hx hj) hsU>

/-- The complement of a principal lower set `Iic L` is Scott-open: it is an upper set, and it
is inaccessible by directed suprema because if every member of a directed `S` lies below `L`
then so does `sqsup S`. -/
theorem scottOpen_not_le (L : D) : ScottOpen {z : D | not z <= L} := by
  refine <fun a b hab ha hb => ha (le_trans hab hb), fun S hSne hSdir hmem => ?_>
  by_contra hcon
  refine hmem (sSup_le fun s hs => ?_)

```

```

by_contra hsL
exact hcon <s, hs, hsL>

omit [IsDirected ? (* <= *)] in
/-- **Scott 1972, Proposition 2.1 (forward).** If a monotone net converges to `y` in the Scott
topology and `L` is its least upper bound, then `y <= L`. -/
theorem proposition_2_1_le_of_converges (hL : IsLUB (range x) L)
  (hconv : ScottConvergesTo x y) : y <= L := by
  by_contra hyL
  obtain <i, hi> := hconv {z : D | not z <= L} (scottOpen_not_le L) hyL
  exact hi i le_rfl (hL.1 <i, rfl>)

/-- **Scott 1972, Proposition 2.1.** A monotone net with least upper bound `L` converges to
`y` in the Scott topology iff `y sqsub L = sqsup {x_i}`. -/
theorem proposition_2_1 [Nonempty ?] (hx : IsMonotoneNet x) (hL : IsLUB (range x) L) :
  ScottConvergesTo x y <-> y <= L :=
  <fun hconv => proposition_2_1_le_of_converges hL hconv, proposition_2_1_of_le hx hL>

end Scott1972.ContinuousLattice

```

A.10 vendor/scott1972/Scott1972/ContinuousLattice/Theorem212.lean

298 lines.

Lean 4 source

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
Github: https://github.com/catskillsresearch/scott1972
-/

import Scott1972.ContinuousLattice.Constructions
import Scott1972.ContinuousLattice.FunctionSpaces

/-!
# Theorem 2.12: injective spaces are exactly the continuous lattices

Scott's Theorem 2.12 states that a  $T_0$ -space is injective iff it is a continuous lattice
under
its Scott topology. The forward direction (continuous lattice ? injective) is
`theorem_2_12_forward` (= Proposition 2.11) in `Constructions.lean`.

This file supplies the backward direction. The argument (Scott 1972, S2) is:

* an injective space is a retract of a power of the Sierpinski space  $0 = \text{Prop}$  (Corollary
  1.6);
* a power of  $0$  is a continuous lattice whose Scott topology is its product topology
  (`sierpinskiPower_isContinuousLattice`, `scottTopology_sierpinskiPower`);
* a retract of a continuous lattice is a continuous lattice (Proposition 2.10).

The retraction  $r : 0^I \rightarrow D$  with section  $s : D \rightarrow 0^I$  makes  $e := s \circ r$  a
Scott-continuous
idempotent on  $0^I$ , whose fixed-point set is a continuous lattice (Proposition 2.10) and is
homeomorphic to  $D$ . Hence every injective space is homeomorphic to a continuous lattice under
its Scott topology.

The order-theoretic core is the construction `IdemFix`: the fixed points of a Scott-continuous
idempotent on a complete lattice form a complete lattice (`IdemFix.completeLattice`).
-/

```

```

namespace Scott1972.ContinuousLattice

open Topology Set

section FixedPoints

variable {L : Type*} [CompleteLattice L]

/-- The fixed-point set `{x | e x = x}` of an endomap `e`, as a subtype. -/
abbrev IdemFix (e : L → L) : Type _ := {x : L // e x = x}

namespace IdemFix

variable {e : L → L}

/-- The supremum in the fixed-point set: apply `e` to the ambient supremum (which lands back in
the fixed-point set because `e` is idempotent). -/
@[reducible] noncomputable def supSet (hidem : forall x, e (e x) = e x) : SupSet (IdemFix e)
:=
  <fun S => <e (sSup (Subtype.val '' S)), hidem _>>

/-- With the ambient-then-`e` supremum, every set has a least upper bound in `IdemFix e`. This
needs only that `e` is monotone (which follows from Scott continuity). -/
theorem isLUB_sSup (hidem : forall x, e (e x) = e x) (hmono : Monotone e) :
  letI := supSet hidem
  forall S : Set (IdemFix e), IsLUB S (sSup S) := by
  letI := supSet hidem
  intro S
  constructor
  * intro k hk
    rw [Subtype.coe_le_coe.symm, Subtype.coe_mk]
    show (k : L) <= e (sSup (Subtype.val '' S))
    calc (k : L) = e k := k.2.symm
      <= e (sSup (Subtype.val '' S)) :=
        hmono (le_sSup (Set.mem_image_of_mem _ hk))
  * intro w hw
    rw [Subtype.coe_le_coe.symm, Subtype.coe_mk]
    show e (sSup (Subtype.val '' S)) <= (w : L)
    calc e (sSup (Subtype.val '' S)) <= e (w : L) := by
      refine hmono (sSup_le ?_)
      rintro _ <k, hk, rfl>
      exact hw hk
    _ = (w : L) := w.2

/-- **Fixed points of a monotone idempotent form a complete lattice.** The supremum is the
ambient
supremum corrected by `e`; the rest follows from `completeLatticeOfSup`. -/
@[reducible] noncomputable def completeLattice (hidem : forall x, e (e x) = e x) (hmono :
  Monotone e) :
  CompleteLattice (IdemFix e) :=
  letI := supSet hidem
  completeLatticeOfSup (IdemFix e) (isLUB_sSup hidem hmono)

/-- The ambient supremum corrected by `e` is the supremum in `IdemFix e`. -/
theorem coe_sSup (hidem : forall x, e (e x) = e x) (hmono : Monotone e) (S : Set (IdemFix e))
:
  letI := completeLattice hidem hmono
  ((sSup S : IdemFix e) : L) = e (sSup (Subtype.val '' S)) := rfl

end IdemFix

/-! ### The fixed-point set of a Scott-continuous idempotent is a continuous lattice -/

```

```

variable {e : L -> L}

theorem idemFix_incl_preservesDirectedSup (hidem : forall x, e (e x) = e x)
  (hsc : PreservesDirectedSup e) :
  letI := IdemFix.completeLattice hidem (preservesDirectedSup_monotone hsc)
  PreservesDirectedSup (Subtype.val : IdemFix e -> L) := by
  letI := IdemFix.completeLattice hidem (preservesDirectedSup_monotone hsc)
  intro S hS hSdir
  show e (sSup (Subtype.val '' S)) = sSup (Subtype.val '' S)
  have hdir' : DirectedOn (* <= *) (Subtype.val '' S) := by
    rintro _ <a, ha, rfl> _ <b, hb, rfl>
    obtain <c, hc, hac, hbc> := hSdir a ha b hb
    exact <c.val, Set.mem_image_of_mem _ hc, hac, hbc>
  have hne' : (Subtype.val '' S).Nonempty := hS.image _
  rw [hsc hne' hdir']
  congr 1
  rw [ <- Set.image_comp]
  exact Set.image_congr (fun s _ => s.2)

theorem idemFix_retr_preservesDirectedSup (hidem : forall x, e (e x) = e x)
  (hsc : PreservesDirectedSup e) :
  letI := IdemFix.completeLattice hidem (preservesDirectedSup_monotone hsc)
  PreservesDirectedSup (fun x : L => (<e x, hidem x> : IdemFix e)) := by
  letI := IdemFix.completeLattice hidem (preservesDirectedSup_monotone hsc)
  have hmono := preservesDirectedSup_monotone hsc
  intro T hT hTdir
  apply Subtype.ext
  rw [IdemFix.coe_sSup hidem hmono]
  show e (sSup T) = e (sSup (Subtype.val '' ((fun x : L => (<e x, hidem x> : IdemFix e)) '' T)))
  have himg : Subtype.val '' ((fun x : L => (<e x, hidem x> : IdemFix e)) '' T) = e '' T := by
    rw [ <- Set.image_comp]; rfl
  rw [himg]
  have hTdir' : DirectedOn (* <= *) (e '' T) := by
    rintro _ <a, ha, rfl> _ <b, hb, rfl>
    obtain <c, hc, hac, hbc> := hTdir a ha b hb
    exact <e c, Set.mem_image_of_mem _ hc, hmono hac, hmono hbc>
  have hTne' : (e '' T).Nonempty := hT.image _
  rw [hsc hT hTdir, hsc hTne' hTdir']
  congr 1
  rw [ <- Set.image_comp]
  exact Set.image_congr (fun x _ => (hidem x).symm)

/-- The fixed-point set of a Scott-continuous idempotent `e` on `L`, with the
ambient-supremum-corrected complete-lattice structure, is a *retract of `L`*: the inclusion and
the
corestriction of `e` are Scott-continuous and compose to the identity. -/
noncomputable def idemFixRetraction (hidem : forall x, e (e x) = e x) (hsc :
  PreservesDirectedSup e) :
  @IsContinuousLatticeRetraction (IdemFix e) L
  (IdemFix.completeLattice hidem (preservesDirectedSup_monotone hsc)) _ :=
  letI := IdemFix.completeLattice hidem (preservesDirectedSup_monotone hsc)
  { incl := <Subtype.val,
    continuous_of_preservesDirectedSup (idemFix_incl_preservesDirectedSup hidem hsc)>
    retr := <fun x => <e x, hidem x>,
    continuous_of_preservesDirectedSup (idemFix_retr_preservesDirectedSup hidem hsc)>
    retr_incl := fun k => Subtype.ext k.2 }

/-- **Fixed points of a Scott-continuous idempotent form a continuous lattice.** Combine the
retraction `idemFixRetraction` with Proposition 2.10(a). -/
theorem idemFix_isContinuousLattice (hidem : forall x, e (e x) = e x) (hsc :
  PreservesDirectedSup e)
  (hL : IsContinuousLattice L) :

```



```

    @IsContinuousLattice (IdemFix e)
      (IdemFix.completeLattice hidem (preservesDirectedSup_monotone hsc)) := by
    letI := IdemFix.completeLattice hidem (preservesDirectedSup_monotone hsc)
    exact proposition_2_10_a (idemFixRetraction hidem hsc) hL

/-- **Scott topology of the fixed-point lattice = subspace topology.** Proposition 2.10(b)
    applied
to `idemFixRetraction`: the Scott topology of `IdemFix e` is the topology induced by the
    inclusion
from the Scott topology of `L`. -/
theorem idemFix_scottTopology (hidem : forall x, e (e x) = e x) (hsc : PreservesDirectedSup e)
  (hL : IsContinuousLattice L) :
  @scottTopologicalSpace (IdemFix e)
    (IdemFix.completeLattice hidem (preservesDirectedSup_monotone hsc)) =
    TopologicalSpace.induced (Subtype.val : IdemFix e -> L) scottTopologicalSpace := by
  letI := IdemFix.completeLattice hidem (preservesDirectedSup_monotone hsc)
  exact proposition_2_10_b (idemFixRetraction hidem hsc) hL

end FixedPoints

/-! ### Theorem 2.12, backward direction -/

universe u

/-- **Scott 1972, Theorem 2.12 (backward direction).** Every injective `T_0`-space is
    homeomorphic
to a continuous lattice equipped with its Scott topology.

The injective space `D` is a retract of a power  $0^I = (I \rightarrow \text{Prop})$  of the Sierpinski space
(Corollary 1.6). Writing  $s : D \rightarrow 0^I$  for the embedding and  $r : 0^I \rightarrow D$  for the
retraction,
`e := s ∘ r` is a Scott-continuous idempotent on  $0^I$  (its topology is its Scott
topology by
`scottTopology_sierpinskiPower`). The fixed-point set `IdemFix e` is therefore a continuous
lattice
(`idemFix_isContinuousLattice`, via Proposition 2.10), and  $d \mapsto s \circ d$  is a homeomorphism `D
??
IdemFix e` with inverse the retraction. -/
theorem theorem_2_12_backward {D : Type u} [TopologicalSpace D] [TOSpace D]
  (hD : IsInjectiveSpace.{u, u} D) :
  exists (E : Type u) (inst : CompleteLattice E),
    @IsContinuousLattice E inst /\
      Nonempty (@Homeomorph D E _ (@scottTopologicalSpace E inst)) := by
  obtain <?, <R>> := (corollary_1_6 D).1 hD
  -- `e = s ∘ r` on the Sierpinski power `L = ? -> Prop`.
  have hidem : forall x, R.section' (R.retraction (R.section' (R.retraction x)))
    = R.section' (R.retraction x) :=
    fun x => congrArg R.section' (R.retraction_section (R.retraction x))
  have hL : IsContinuousLattice (? -> Prop) := sierpinskiPower_isContinuousLattice ?
  -- `e` is Scott-continuous: it is product-continuous (`s ∘ r`), and the Scott topology
    of the
  -- Sierpinski power is its product topology.
  have hcont_e : @Continuous (? -> Prop) (? -> Prop) scottTopologicalSpace
    scottTopologicalSpace
    (fun x => R.section' (R.retraction x)) := by
  rw [scottTopology_sierpinskiPower ?]
  exact R.section'.continuous.comp R.retraction.continuous
  have hsc : PreservesDirectedSup (fun x => R.section' (R.retraction x)) :=
    continuous_preservesDirectedSup hcont_e
  refine <IdemFix (fun x => R.section' (R.retraction x)),
    IdemFix.completeLattice hidem (preservesDirectedSup_monotone hsc),
    idemFix_isContinuousLattice hidem hsc hL, ?>
  -- The Scott topology of `IdemFix e` equals the subspace topology it inherits as a subtype of

```

```

    the
-- Sierpinski power: both are `induced Subtype.val` of the (Scott = product) topology of `0
^I`.
have heq : (@scottTopologicalSpace (IdemFix (fun x => R.section' (R.retraction x)))
  (IdemFix.completeLattice hidem (preservesDirectedSup_monotone hsc)))
  = instTopologicalSpaceSubtype := by
  rw [idemFix_scottTopology hidem hsc hL, scottTopology_sierpinskiPower ?]
  rfl
rw [heq]
-- the homeomorphism `D ?? IdemFix e`, with the subspace topology (where `Continuous.comp`
works)
have hfix : forall d, (fun x => R.section' (R.retraction x)) (R.section' d) = R.section' d
:=
  fun d => congrArg R.section' (R.retraction_section d)
exact <{
  toFun := fun d => <R.section' d, hfix d>
  invFun := fun k => R.retraction k.1
  left_inv := fun d => R.retraction_section d
  right_inv := fun k => Subtype.ext k.2
  continuous_toFun := by exact R.section'.continuous.subtype_mk hfix
  continuous_invFun := by exact R.retraction.continuous.comp continuous_subtype_val }>

/-- **Scott 1972, Theorem 2.12.** A `T_0`-space is injective iff it is (homeomorphic to) a
continuous lattice under its Scott topology. The forward direction is Proposition 2.11; the
backward direction is `theorem_2_12_backward`. -/
theorem theorem_2_12 {D : Type u} [TopologicalSpace D] [T0Space D] :
  IsInjectiveSpace.{u, u} D <=>
    exists (E : Type u) (inst : CompleteLattice E),
      @IsContinuousLattice E inst /\
        Nonempty (@Homeomorph D E _ (@scottTopologicalSpace E inst)) := by
  refine <theorem_2_12_backward, ?_>
  rintro <E, inst, hE, <h>>
  letI tauE : TopologicalSpace E := @scottTopologicalSpace E inst
  exact @IsInjectiveSpace.of_retract E D tauE _ (theorem_2_12_forward hE)
  <?h, h.continuous> <?h.symm, h.symm.continuous> (fun d => h.left_inv d)

/-! ### Lemma 3.9: compatibility of maximal extensions with a projection on the range -/
section Lemma39

variable {X Y D D' : Type*} [TopologicalSpace X] [TopologicalSpace Y]
[CompleteLattice D] [CompleteLattice D']

/-- **Scott 1972, Lemma 3.9.** With `e : X -> Y` a subspace embedding and `i, j : D <=> D'`
a
projection on the range, if continuous `f : X -> D` and `g : X -> D` satisfy `f = j comp
g`, then the
maximal extensions (Proposition 3.8) satisfy `f = j comp g`.

The proof is Scott's, recast through the faithful `scottExtend`:
* `j comp g` sqsub `f`: `j comp g` is a continuous solution of `(j comp g) comp e = j
comp g = f`, so maximality of
`f` (`scottExtend_maximal`) gives the bound;
* `i comp f` sqsub `g`: `(i comp f) comp e = i comp f = i comp j comp g` sqsub `g`
(since `i comp j` sqsub `id`), so the *sub*-solution
maximality of `g` (`scottExtend_maximal_le`, the remark after 3.8) gives the bound;
* combining: `f = j comp i comp f` sqsub `j comp g` sqsub `f` (using `j comp i = id`
and monotonicity of `j`). -/
theorem lemma_3_9 (hD : IsContinuousLattice D) (hD' : IsContinuousLattice D')
(P : IsContinuousLatticeProjection D D') (e : X -> Y) (he : IsEmbedding e)
{f : X -> D} {g : X -> D'} (hf : @Continuous X D _ scottTopologicalSpace f)
(hg : @Continuous X D' _ scottTopologicalSpace g)
(hfg : forall x, f x = (P.retr : D' -> D) (g x)) (y : Y) :

```

```

    scottExtend e f y = (P.retr : D' -> D) (scottExtend e g y) := by
have hfbar : @Continuous Y D _ scottTopologicalSpace (scottExtend e f) :=
    scottExtend_continuous hD e f
have hgbar : @Continuous Y D' _ scottTopologicalSpace (scottExtend e g) :=
    scottExtend_continuous hD' e g
-- `j` comp `g` and `i` comp `f` are continuous (Scott topology is not an instance; register
it locally so
-- `Continuous.comp` can fire, scoped to avoid the lattice `<= ` clashing with
specialization order).
have hjg : @Continuous Y D _ scottTopologicalSpace (fun z => (P.retr : D' -> D) (
    scottExtend e g z)) := by
    letI : TopologicalSpace D := scottTopologicalSpace
    letI : TopologicalSpace D' := scottTopologicalSpace
    exact P.retr.continuous.comp hgbar
have hif : @Continuous Y D' _ scottTopologicalSpace (fun z => (P.incl : D -> D') (
    scottExtend e f z)) := by
    letI : TopologicalSpace D := scottTopologicalSpace
    letI : TopologicalSpace D' := scottTopologicalSpace
    exact P.incl.continuous.comp hfbar
-- Step A: `j` comp `g` sqsub `f`.
have hA : forall z, (P.retr : D' -> D) (scottExtend e g z) <= scottExtend e f z := by
    intro z
    refine scottExtend_maximal hD e hjg ?_ z
    intro x
    show (P.retr : D' -> D) (scottExtend e g (e x)) = f x
    rw [scottExtend_eq_of_continuous hD' e he g hg x, <- hfg x]
-- Step B: `i` comp `f` sqsub `g`.
have hB : forall z, (P.incl : D -> D') (scottExtend e f z) <= scottExtend e g z := by
    intro z
    refine scottExtend_maximal_le hD' e hif ?_ z
    intro x
    show (P.incl : D -> D') (scottExtend e f (e x)) <= g x
    rw [scottExtend_eq_of_continuous hD e he f hf x, hfg x]
    exact P.incl_retr_le (g x)
refine le_antisymm ?_ (hA y)
calc scottExtend e f y
    = (P.retr : D' -> D) ((P.incl : D -> D') (scottExtend e f y)) :=
      (P.retr_incl (scottExtend e f y)).symm
    _ <= (P.retr : D' -> D) (scottExtend e g y) := P.retr.monotone (hB y)

end Lemma39

end Scott1972.ContinuousLattice

```

A.11 vendor/scott1972/Scott1972/ContinuousLattice/WayBelow.lean

236 lines.

Lean 4 source

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
Github: https://github.com/catskillsresearch/scott1972
-/

import Mathlib.Order.CompleteLattice.Basic
import Mathlib.Order.UpperLower.Basic
import Mathlib.OrderDirected

/-!

```

```

# The induced (Scott) topology and the way-below relation (Scott 1972, S2)

This file formalizes the core of Scott's S2 *Continuous Lattices*: the topology a complete
lattice carries intrinsically (Scott's "induced topology", today the **Scott topology**),
the **way-below relation**  $\ll$ , the basic properties of  $\ll$  (Scott's Proposition 2.2),
and
the definition of a **continuous lattice** (Scott's Definition 2.3).

Scott defines the induced topology on a partially ordered set  $D$  by declaring  $U$  open iff

* (i)  $U$  is an upper set; and
* (ii) whenever  $S \subseteq D$  is directed (and, in this paper, non-empty),  $\sqsup S$  exists
    and
     $\sqsup S \in U$ , then  $S \cap U \neq \{\}$ .

He then defines  $x \ll y$  (" $x$  is way below  $y$ ") to mean  $y$  in  $\text{interior}\{z \mid x \sqsubseteq z\}$ , the
interior being taken in this induced topology. We encode "Scott-open" as the predicate
ScottOpen and  $\ll$  as WayBelow, witnessing the interior by a Scott-open neighbourhood
contained in the principal up-set  $\text{Set.Ici } x = \{z \mid x \sqsubseteq z\}$ . This is faithful to Scott's
topological definition (rather than the order-theoretic shortcut), and as a result Scott's
Proposition 2.2 (vi) and (vii) fall straight out of the open-set axioms.

This is the classical/topological version of the theory, so we reason classically.
-/

namespace Scott1972.ContinuousLattice

variable {D : Type*} [CompleteLattice D]

/-- **Scott 1972, S2, the induced topology.**  $U$  is *Scott-open* when it is an upper set and
is inaccessible by suprema of non-empty directed sets: if a non-empty directed  $S$  has its
supremum in  $U$ , then some member of  $S$  already lies in  $U$ . -/
def ScottOpen (U : Set D) : Prop :=
  IsUpperSet U /\
  forall ?S : Set D?, S.Nonempty -> DirectedOn (* <= *) S -> sqsup S in U -> (S ∩ U).Nonempty

theorem ScottOpen.isUpperSet {U : Set D} (h : ScottOpen U) : IsUpperSet U := h.1

theorem scottOpen_univ : ScottOpen (Set.univ : Set D) := by
  refine <isUpperSet_univ, fun S hS _ => ?_>
  obtain <s, hs> := hS
  exact <s, hs, Set.mem_univ s>

theorem scottOpen_inter {U V : Set D} (hU : ScottOpen U) (hV : ScottOpen V) :
  ScottOpen (U ∩ V) := by
  refine <hU.1.inter hV.1, fun S hS hSdir hmem => ?_>
  obtain <s_1, hs_1S, hs_1U> := hU.2 hS hSdir hmem.1
  obtain <s_2, hs_2S, hs_2V> := hV.2 hS hSdir hmem.2
  obtain <s_3, hs_3S, h_1, h_2> := hSdir s_1 hs_1S s_2 hs_2S
  exact <s_3, hs_3S, hU.1 h_1 hs_1U, hV.1 h_2 hs_2V>

theorem scottOpen_sUnion {C : Set (Set D)} (hC : forall U in C, ScottOpen U) :
  ScottOpen (?_0 C) := by
  refine <isUpperSet_sUnion fun U hU => (hC U hU).1, fun S hS hSdir hmem => ?_>
  obtain <U, hUC, hUmem> := hmem
  obtain <s, hsS, hsU> := (hC U hUC).2 hS hSdir hUmem
  exact <s, hsS, U, hUC, hsU>

/-- **Scott 1972, S2.** The *way-below* relation:  $x \ll y$  iff  $y$  lies in the interior of
the
principal up-set  $\text{Set.Ici } x$  for the induced topology, witnessed by a Scott-open

```

```

neighbourhood of `y` contained in `Set.Ici x`. -/
def WayBelow (x y : D) : Prop :=
  exists U : Set D, ScottOpen U /\ y in U /\ U subseq Set.Ici x

@[inherit_doc] scoped infix:50 " << " => WayBelow

/-- **Scott 1972, Proposition 2.2(v).** `x << y` implies `x <= y`. -/
theorem WayBelow.le {x y : D} (h : x << y) : x <= y := by
  obtain <U, _, hyU, hsub> := h
  exact hsub hyU

/-- **Scott 1972, Proposition 2.2(i).** `False << x` for every `x`. -/
theorem bot_wayBelow (x : D) : (False : D) << x :=
  <Set.univ, scottOpen_univ, Set.mem_univ x, fun _ _ => bot_le>

/-- **Scott 1972, Proposition 2.2(iii).** `x << y` and `y <= z` imply `x << z` (monotone
    on the
right). -/
theorem WayBelow.trans_le {x y z : D} (h : x << y) (hyz : y <= z) : x << z := by
  obtain <U, hU, hyU, hsub> := h
  exact <U, hU, hU.1 hyz hyU, hsub>

/-- **Scott 1972, Proposition 2.2(iv).** `x <= y` and `y << z` imply `x << z` (monotone
    on the
left). -/
theorem WayBelow.le_trans {x y z : D} (hxy : x <= y) (h : y << z) : x << z := by
  obtain <U, hU, hzU, hsub> := h
  refine <U, hU, hzU, fun w hw => ?_>
  have hyw : y <= w := Set.mem_Ici.1 (hsub hw)
  exact Set.mem_Ici.2 (hxy.trans hyw)

/-- **Scott 1972, Proposition 2.2(ii).** `x << z` and `y << z` imply `x sqsup y << z`.
    -/
theorem WayBelow.sup {x y z : D} (hx : x << z) (hy : y << z) : x sqsup y << z := by
  obtain <U, hU, hzU, hUsub> := hx
  obtain <V, hV, hzV, hVsub> := hy
  refine <U I V, scottOpen_inter hU hV, <hzU, hzV>, fun w hw => ?_>
  exact Set.mem_Ici.2 (sup_le (hUsub hw.1) (hVsub hw.2))

/-- Auxiliary: the up-set `{z | x << z}` is itself Scott-open. (This is not Scott's
Proposition 2.2(vi) -- see `wayBelow_self_iff_scottOpen_Ici` for that -- but it is a standard
and useful fact, the openness of the sets `Up x`.) -/
theorem scottOpen_wayBelow (x : D) : ScottOpen {z | x << z} := by
  refine <fun a b hab ha => ha.trans_le hab, fun S hS hSdir hmem => ?_>
  obtain <U, hU, hsupU, hsub> := hmem
  obtain <s, hsS, hsU> := hU.2 hS hSdir hsupU
  exact <s, hsS, <U, hU, hsU, hsub>>

/-- **Scott 1972, Proposition 2.2(vi).** `x << x` iff the principal up-set `{z | x sqsub z
    }` (i.e.
`Set.Ici x`) is Scott-open. This characterizes the compact (finite, isolated) elements:
`x` is compact exactly when `x` is open. -/
theorem wayBelow_self_iff_scottOpen_Ici {x : D} : x << x <-> ScottOpen (Set.Ici x) := by
  constructor
  * rintro <U, hU, hxU, hsub>
    -- `Ici x = U` : `Ici x` subseq `U` since `U` is upper and `x` in `U`; `U` subseq `Ici x`
    -- is `hsub`.
    have hIci : Set.Ici x = U :=
      le_antisymm (fun w hw => hU.1 (Set.mem_Ici.1 hw) hxU) hsub
    rw [hIci]; exact hU
  * intro hopen
    exact <Set.Ici x, hopen, Set.self_mem_Ici, le_refl _>

```

```

/-- **Scott 1972, Proposition 2.2(vii).** For a non-empty directed set `S`, `x << sqsup S`
    iff
`x << y` for some `y` in `S`. The forward direction is exactly inaccessibility of a Scott-
open
set; the backward direction is monotonicity on the right. -/
theorem wayBelow_sSup_iff {x : D} {S : Set D} (hS : S.Nonempty)
  (hSdir : DirectedOn (* <= *) S) : x << sSup S <-> exists y in S, x << y := by
  constructor
  * rintro <U, hU, hsupU, hsub>
    obtain <s, hsS, hsU> := hU.2 hS hSdir hsupU
    exact <s, hsS, U, hU, hsU, hsub>
  * rintro <y, hyS, hxy>
    exact hxy.trans_le (le_sSup hyS)

/-- **Scott 1972, Definition 2.3.** A complete lattice `D` is a *continuous lattice* when every
element is the supremum of the elements way below it: `y = sqsup {x | x << y}`. -/
def IsContinuousLattice (D : Type*) [CompleteLattice D] : Prop :=
  forall y : D, IsLUB {x | x << y} y

/-- In a continuous lattice, `y` is the actual supremum of `{x | x << y}`. -/
theorem IsContinuousLattice.sSup_wayBelow (h : IsContinuousLattice D) (y : D) :
  sSup {x | x << y} = y :=
  (h y).sSup_eq

/-- The set `{x | x << y}` of elements way below `y` is directed: it is closed under binary
joins by Proposition 2.2(ii) (`WayBelow.sup`). This holds in *any* complete lattice. -/
theorem directedOn_wayBelow (y : D) : DirectedOn (* <= *) {x | x << y} :=
  fun a ha b hb => <a sqsup b, ha.sup hb, le_sup_left, le_sup_right>

/-- **Interpolation property of `<<`.** In a continuous lattice, the way-below relation
interpolates: `a << c` implies there is some `b` with `a << b << c`.

The proof runs Scott's standard argument: the set `M = {m | exists x, m << x /\ x << c}`
is directed
(using directedness of `{* << x}` twice) and has supremum `c` (using continuity twice). Hence
`a << c = sqsup M` with `M` directed forces `a << m` for some `m` in `M`, say `m << x
<< c`; then
`a << m <= x` gives `a << x << c`, so `b := x` works. -/
theorem wayBelow_interpolate (hD : IsContinuousLattice D) {a c : D} (hac : a << c) :
  exists b, a << b /\ b << c := by
  set M : Set D := {m | exists x, m << x /\ x << c} with hM
  have hMdir : DirectedOn (* <= *) M := by
    rintro m_1 <x_1, hm_1x_1, hx_1c> m_2 <x_2, hm_2x_2, hx_2c>
    obtain <x_3, hx_3c, hx_1_3, hx_2_3> := directedOn_wayBelow c x_1 hx_1c x_2 hx_2c
    obtain <m_3, hm_3x_3, hm_1m_3, hm_2m_3> :=
      directedOn_wayBelow x_3 m_1 (hm_1x_1.trans_le hx_1_3) m_2 (hm_2x_2.trans_le hx_2_3)
    exact <m_3, <x_3, hm_3x_3, hx_3c>, hm_1m_3, hm_2m_3>
  have hMne : M.Nonempty := <False, a, bot_wayBelow a, hac>
  have hsupM : sSup M = c := by
    refine le_antisymm (sSup_le ?_) ?_
    * rintro m <x, hmx, hxc>
      exact hmx.le.trans hxc.le
    * rw [ <- hD.sSup_wayBelow c ]
      refine sSup_le fun x hxc => ?_
      rw [ <- hD.sSup_wayBelow x ]
      exact sSup_le fun m hmx => le_sSup <x, hmx, hxc>
  rw [ <- hsupM ] at hac
  obtain <m, <x, hmx, hxc>, ham> := (wayBelow_sSup_iff hMne hMdir).1 hac
  exact <x, ham.trans_le hmx.le, hxc>

/-- In a continuous lattice the sets `Up a = {z | a << z}` form a basis of the Scott
topology:
every Scott-open `U` containing `z` contains some basic neighbourhood `Up a` of `z`. Indeed

```

```

`z = sqsup {a | a << z}` is a directed supremum lying in the open set `U`, so some `a << z`
  already
lies in `U`, and then `Up a subseq a subseq U`. -/
theorem exists_wayBelow_subset (hD : IsContinuousLattice D) {U : Set D} (hU : ScottOpen U)
  {z : D} (hz : z in U) : exists a, a << z /\ {w | a << w} subseq U := by
  have hne : {a | a << z}.Nonempty := <False, bot_wayBelow z>
  have hsup : sSup {a | a << z} in U := by rw [hD.sSup_wayBelow z]; exact hz
  obtain <a, haz, haU> := hU.2 hne (directedOn_wayBelow z) hsup
  exact <a, haz, fun w hw => hU.1 hw.le haU>

/-- A strengthening of `exists_wayBelow_subset`: the witness `a << z` can be taken with the
  whole
principal up-set `Set.Ici a` (not merely `Up a`) inside `U`. The element `a` produced lies in
  the
open `U`, which is upper, so `a subseq U`. -/
theorem exists_wayBelow_Ici_subset (hD : IsContinuousLattice D) {U : Set D} (hU : ScottOpen U)
  {z : D} (hz : z in U) : exists a, a << z /\ Set.Ici a subseq U := by
  have hne : {a | a << z}.Nonempty := <False, bot_wayBelow z>
  have hsup : sSup {a | a << z} in U := by rw [hD.sSup_wayBelow z]; exact hz
  obtain <a, haz, haU> := hU.2 hne (directedOn_wayBelow z) hsup
  exact <a, haz, fun w hw => hU.1 (Set.mem_Ici.1 hw) haU>

/-- The infimum of a Scott-open neighbourhood of `y` is way below `y`: the open set is itself
  the required witness. Scott uses this in moving between Definition 2.3 and Proposition 2.4. -/
theorem sInf_wayBelow {U : Set D} (hU : ScottOpen U) {y : D} (hy : y in U) :
  sInf U << y :=
  <U, hU, hy, fun _ hz => Set.mem_Ici.2 (sInf_le hz)>

/-- **Scott 1972, Proposition 2.4.** A complete lattice is continuous iff every element is the
  supremum of the infima of its open neighbourhoods: `y = sqsup {sqcap U : y in U open}`.
  This is Scott's
alternate form of Definition 2.3. -/
theorem isContinuousLattice_iff_isLUB_sInf_nhds :
  IsContinuousLattice D <->
    forall y : D, IsLUB {a : D | exists U, ScottOpen U /\ y in U /\ a = sInf U} y :=
  by
  constructor
  * intro h y
  refine <?_, ?_>
  * rintro a <U, hU, hyU, rfl>
  exact (sInf_wayBelow hU hyU).le
  * intro b hb
  refine (h y).2 ?_
  intro x hx
  obtain <U, hU, hyU, hsub> := hx
  have hxle : x <= sInf U := le_sInf fun _ hz => Set.mem_Ici.1 (hsub hz)
  exact hxle.trans (hb <U, hU, hyU, rfl>)
  * intro h y
  refine <fun x hx => hx.le, ?_>
  intro b hb
  refine (h y).2 ?_
  rintro a <U, hU, hyU, rfl>
  exact hb (sInf_wayBelow hU hyU)

end Scott1972.ContinuousLattice

```

A.12 QLambda.lean

49 lines.

[Lean 4 source](#)

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/
import QLambda.Adequacy
import QLambda.ChoiRayObstruction
import QLambda.Effects
import QLambda.FiniteImageNonclosure
import QLambda.HardwareAdequacy
import QLambda.HardwareChannelSemantics
import QLambda.HardwareCompletenessCounterexample
import QLambda.Interp
import QLambda.InstrumentPower
import QLambda.Monad
import QLambda.ObservationBasis
import QLambda.OmegaQVA
import QLambda.Operational
import QLambda.PhysicalTheory
import QLambda.QDomain
import QLambda.QuantumDomainEquation
import QLambda.QuantumInstrument
import QLambda.QuantumPower
import QLambda.QuantumStateSpace
import QLambda.RationalComplex
import QLambda.RationalCP
import QLambda.RefinementCounterexample
import QLambda.RoundedTheory
import QLambda.RoundedTheoryMorphisms
import QLambda.RoundedTheoryOmega
import QLambda.Saturation
import QLambda.ScottLowerSet
import QLambda.Soundness
import QLambda.Syntax
import QLambda.TTObservationBasis
import QLambda.TTComputationChoice
import QLambda.TTContinuationMonad
import QLambda.TTExternalChoice
import QLambda.TTInternalChoice
import QLambda.TTPhysicalEmbedding
import QLambda.TTPhysicalPrimitives
import QLambda.TTProbChoice
import QLambda.TTRefinement
import QLambda.TTResultAlgebra
import QLambda.TTResultApproximation
import QLambda.TTResultOperations
import QLambda.TTRoundedTheory
import QLambda.TTTokenTheoryOperations
import QLambda.TTWeightedAggregation

```

A.13 QLambda/Adequacy.lean

418 lines.

Lean 4 source (lines 1–400)

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/
import QLambda.TTComputationChoice
import QLambda.TTPhysicalPrimitives

```



```

/-!
# Operational evaluation and partial adequacy

The finitely presented primitive fragment is evaluated as a finite TNI
instrument. Observing the TT denotation at a finitely presented result
continuation recovers exactly the tokens of that operational instrument.

General closed-term adequacy is stated only under an explicit finite-
denotation hypothesis. Rational coded-test separation is unconditional, but
the finite physical image is not claimed to contain every denotation:
higher-order recursion may leave it.

This module does not claim adequacy or channel-tree completeness for every
untyped closed term and every semantic realization. In particular, applying
a returned classical payload as though it were a function is operationally
stuck; a nonbottom denotation for such an ill-shaped application must be
excluded by a semantic hypothesis or by a stuck-free syntactic fragment.
-/

namespace QLambda

open Scott1972.ContinuousLattice
open TTPhysicalPrimitives

universe u

namespace PrimitiveEvaluation

variable {n : Nat} {D E : Type u}

/-- Operational meaning of a closed qubit primitive. -/
def eval : QubitPrimitive D -> FiniteInstrumentComp 2 D :=
  finiteInstrument

@[simp] theorem eval_ret (d : D) :
  eval (.ret d) = FiniteInstrumentComp.unit (n := 2) d :=
  rfl

@[simp] theorem eval_pauliX (d : D) :
  eval (.pauliX d) = FiniteInstrumentComp.ofOperation Qubit.pauliXOp d :=
  rfl

@[simp] theorem eval_measureZ (d_0 d_1 : D) :
  eval (.measureZ d_0 d_1) =
    Qubit.measureZComp.map (fun b => if b then d_1 else d_0) :=
  rfl

/-- Finite physical sequencing. -/
def evalBind (? : FiniteInstrumentComp n D)
  (f : D -> FiniteInstrumentComp n E) :
  FiniteInstrumentComp n E :=
  ?.bind f

variable [CompleteLattice D] [CompleteLattice E]

/-- Operational weighted combination of two result instruments. -/
noncomputable def evalWeighted
  (p : Prob) (hp_0 : 0 <= p) (hp_1 : p <= 1)
  (? ? : FiniteInstrumentComp n PUnit.{1}) :
  FiniteInstrumentComp n PUnit.{1} :=
  ?.weightedResult p hp_0 hp_1 ?

```

```

/-- Environment selection of an external alternative. -/
def evalSelect (tag : Bool) (? ? : FiniteInstrumentComp n D) :
  FiniteInstrumentComp n D :=
  if tag then ? else ?

/-- Token observation of a finite instrument after a finitely presented
result continuation. -/
noncomputable def observe
  (? : FiniteInstrumentComp n D)
  (? : D -> FiniteInstrumentComp n PUnit.{1}) :
  TTContinuation.TTResult n :=
  (? .bind ?) .satisfiedTTTheory TTContinuation.resultCode

end PrimitiveEvaluation

namespace PrimitiveEvaluation

variable {D : Type}
variable [CompleteLattice D]

/-- First-order programs built from qubit primitives and the three
choice constructors. Application and recursion are excluded.
The value type is in `Type` because `Term` is not universe-polymorphic. -/
inductive FirstOrder : Term (QubitPrimitive D) -> Prop
| prim (p : QubitPrimitive D) : FirstOrder (.prim p)
| intern {M N : Term (QubitPrimitive D)} :
  FirstOrder M -> FirstOrder N -> FirstOrder (.intern M N)
| extern {M N : Term (QubitPrimitive D)} :
  FirstOrder M -> FirstOrder N -> FirstOrder (.extern M N)
| prob (p : Prob) {M N : Term (QubitPrimitive D)} :
  FirstOrder M -> FirstOrder N -> FirstOrder (.prob p M N)

/-- Operational tagged denotation of a first-order primitive program.
Non-first-order constructors are sent to bottom. -/
noncomputable def denoteFirstOrder :
  Term (QubitPrimitive D) ->
  TTContinuation.TTExternalContinuationPower 2 D
| .prim p => denote p
| .intern M N =>
  TTContinuation.liftTaggedBinary
  (TTContinuation.internalChoice (n := 2) (D := D))
  (denoteFirstOrder M, denoteFirstOrder N)
| .extern M N =>
  TTContinuation.externalChoice (denoteFirstOrder M, denoteFirstOrder N)
| .prob p M N =>
  TTContinuation.liftTaggedBinary
  (TTContinuation.probChoice (n := 2) (D := D) p)
  (denoteFirstOrder M, denoteFirstOrder N)
| _ => False

end PrimitiveEvaluation

namespace Adequacy

open PrimitiveEvaluation
open TTPhysicalEmbedding
open TTContinuation

variable {n : Nat} {D E : Type u}
variable [CompleteLattice D] [CompleteLattice E]

/-- A result continuation is presented by finite result instruments at
the values returned by `?`. -/

```

```

def PresentedAt (? : FiniteInstrumentComp n D)
  (k : ScottMap D (TResult n))
  (? : D -> FiniteInstrumentComp n PUnit.{1}) : Prop :=
forall o : ?.Outcome,
  k (?.value o) =
  (? (?.value o)).satisfiedTTTheory resultCode

/-- Membership in a binary join of rounded theories is membership in
one of the two theories. -/
theorem mem_sup_iff {A C : TResult n} {t : TTObservationToken n} :
  t in A sqsup C <=> t in A \ / t in C := by
  constructor
* intro ht
  have hmem : t in (sSup {A, C} : TResult n) := by
    rwa [sSup_pair]
  obtain <T, hT, htT> :=
    (RoundedTheory.mem_sSup (S := ({A, C} : Set _))).mp hmem
  rcases Set.mem_insert_iff.mp hT with rfl | hT'
* exact Or.inl htT
* exact Or.inr ((Set.mem_singleton_iff.mp hT').symm |> htT)
* intro h
  have hpair : (A sqsup C : TResult n) = sSup {A, C} := sSup_pair.symm
  rw [hpair]
  apply (RoundedTheory.mem_sSup (S := ({A, C} : Set _))).2
  rcases h with ht | ht
* exact <A, Set.mem_insert _ _, ht>
* exact <C, Set.mem_insert_of_mem _ (Set.mem_singleton _), ht>

/-- Token-by-token adequacy for a physical embedding. -/
theorem token_of_embed
  (? : FiniteInstrumentComp n D)
  (? : D -> FiniteInstrumentComp n PUnit.{1})
  (k : ScottMap D (TResult n))
  (hk : PresentedAt ? k ?)
  (t : TTObservationToken n) :
  t in (embed ? k) <=>
  TTObservationToken.Holds resultCode t (?.bind ?) := by
  rw [embed_satisfied ? ? k hk,
    FiniteInstrumentComp.mem_satisfiedTTTheory]

/-- The same observation, at every unresolved external tag. -/
theorem token_of_taggedEmbed
  (? : FiniteInstrumentComp n D)
  (? : D -> FiniteInstrumentComp n PUnit.{1})
  (k : ScottMap D (TResult n))
  (hk : PresentedAt ? k ?)
  (i : Nat) (t : TTObservationToken n) :
  t in (taggedEmbed ? i k) <=>
  TTObservationToken.Holds resultCode t (?.bind ?) :=
  token_of_embed ? ? k hk t

/-- Deterministic return is token-adequate. -/
theorem token_of_ret (d : D)
  (? : D -> FiniteInstrumentComp n PUnit.{1})
  (k : ScottMap D (TResult n))
  (hk : PresentedAt (FiniteInstrumentComp.unit (n := n) d) k ?)
  (t : TTObservationToken n) :
  t in (embed (FiniteInstrumentComp.unit (n := n) d) k) <=>
  TTObservationToken.Holds resultCode t
  ((FiniteInstrumentComp.unit (n := n) d).bind ?) :=
  token_of_embed _ ? k hk t

/-- Pauli-X is token-adequate. -/

```

```

theorem token_of_pauliX (d : D)
  (? : D -> FiniteInstrumentComp 2 PUnit.{1})
  (k : ScottMap D (TResult 2))
  (hk : PresentedAt
    (FiniteInstrumentComp.ofOperation Qubit.pauliXOp d) k ?)
  (i : Nat) (t : TTObservationToken 2) :
  t in (denote (.pauliX d) i k) <=>
    TTObservationToken.Holds resultCode t
      ((FiniteInstrumentComp.ofOperation Qubit.pauliXOp d).bind ?) :=
    token_of_taggedEmbed _ ? k hk i t

/-- Computational-basis measurement is token-adequate. -/
theorem token_of_measureZ (d_0 d_1 : D)
  (? : D -> FiniteInstrumentComp 2 PUnit.{1})
  (k : ScottMap D (TResult 2))
  (hk : PresentedAt
    (Qubit.measureZComp.map fun b => if b then d_1 else d_0) k ?)
  (i : Nat) (t : TTObservationToken 2) :
  t in (denote (.measureZ d_0 d_1) i k) <=>
    TTObservationToken.Holds resultCode t
      ((Qubit.measureZComp.map fun b => if b then d_1 else d_0).bind ?) :=
    token_of_taggedEmbed _ ? k hk i t

/-- Every qubit primitive is token-adequate for its operational
instrument. -/
theorem token_of_primitive (p : QubitPrimitive D)
  (? : D -> FiniteInstrumentComp 2 PUnit.{1})
  (k : ScottMap D (TResult 2))
  (hk : PresentedAt (eval p) k ?)
  (i : Nat) (t : TTObservationToken 2) :
  t in (denote p i k) <=>
    TTObservationToken.Holds resultCode t ((eval p).bind ?) :=
    token_of_taggedEmbed (eval p) ? k hk i t

/-- Finite physical bind is token-adequate on finitely presented
continuations. -/
theorem token_of_bind
  (? : FiniteInstrumentComp n D)
  (f : D -> FiniteInstrumentComp n E)
  (h : ScottMap D (TTEstablishmentPower n E))
  (hh : forall o : ?.Outcome, h (?.value o) = taggedEmbed (f (?.value o)))
  (? : E -> FiniteInstrumentComp n PUnit.{1})
  (k : ScottMap E (TResult n))
  (hk : PresentedAt (?.bind f) k ?)
  (i : Nat) (t : TTObservationToken n) :
  t in (taggedBindScott h (taggedEmbed ?) i k) <=>
    TTObservationToken.Holds resultCode t ((?.bind f).bind ?) := by
  rw [taggedEmbed_bind_satisfied ? f h hh ? k hk i]
  exact token_of_taggedEmbed (?.bind f) ? k hk i t

/-- Internal choice observes the join of the two operational theories. -/
theorem token_of_intern
  (?? : FiniteInstrumentComp n D)
  (? : D -> FiniteInstrumentComp n PUnit.{1})
  (k : ScottMap D (TResult n))
  (h? : PresentedAt ? k ?) (h? : PresentedAt ? k ?)
  (i : Nat) (t : TTObservationToken n) :
  t in (liftTaggedBinary (internalChoice (n := n) (D := D))
    (taggedEmbed ?, taggedEmbed ?) i k) <=>
    TTObservationToken.Holds resultCode t (?.bind ?) \ /
    TTObservationToken.Holds resultCode t (?.bind ?) := by
  change t in (internalChoice (taggedEmbed ? i, taggedEmbed ? i) k) <=> _
  rw [internalChoice_apply, mem_sup_iff]

```

```

simp only [taggedEmbed_apply]
rw [token_of_embed ? ? k h? t, token_of_embed ? ? k h? t]

/-- Interior probabilistic choice observes the physical weighted
combination of the two result instruments. -/
theorem token_of_prob_interior
  (p : Prob) (hp_0 : 0 < p) (hp_1 : p < 1)
  (? ? : FiniteInstrumentComp n D)
  (? : D -> FiniteInstrumentComp n PUnit.{1})
  (k : ScottMap D (TResult n))
  (h? : PresentedAt ? k ?) (h? : PresentedAt ? k ?)
  (i : Nat) (t : TTObservationToken n) :
  t in (liftTaggedBinary (probChoice (n := n) (D := D) p)
    (taggedEmbed ?, taggedEmbed ?) i k) <=>
    TTObservationToken.Holds resultCode t
    ((?.bind ?).weightedResult p hp_0.le hp_1.le (?.bind ?)) := by
change t in (probChoice p (taggedEmbed ? i, taggedEmbed ? i) k) <=> _
rw [probChoice_apply, dif_pos <hp_0.le, hp_1.le>]
simp only [taggedEmbed_apply]
have hobs :
  TTWeightedAggregation.weightedResultScott p hp_0.le hp_1.le
    (embed ? k, embed ? k) =
    ((?.bind ?).weightedResult p hp_0.le hp_1.le
      (?.bind ?)).satisfiedTTTheory resultCode := by
rw [embed_satisfied ? ? k h?, embed_satisfied ? ? k h?]
exact TTWeightedAggregation.weightedResultScott_satisfied_interior
  p hp_0 hp_1 (?.bind ?) (?.bind ?)
rw [hobs, FiniteInstrumentComp.mem_satisfiedTTTheory]

/-- External selection recovers the selected operational instrument. -/
theorem token_of_select
  (tag : Bool)
  (? ? : FiniteInstrumentComp n D)
  (? : D -> FiniteInstrumentComp n PUnit.{1})
  (k : ScottMap D (TResult n))
  (h? : PresentedAt ? k ?) (h? : PresentedAt ? k ?)
  (i : Nat) (t : TTObservationToken n) :
  t in (selectBranch tag
    (externalChoice (taggedEmbed ?, taggedEmbed ?)) i k) <=>
    TTObservationToken.Holds resultCode t
    ((evalSelect tag ? ?).bind ?) := by
cases tag
* rw [selectBranch_false_external]
simp only [evalSelect, Bool.false_eq_true, reduceIte]
exact token_of_taggedEmbed ? ? k h? i t
* rw [selectBranch_true_external]
simp only [evalSelect, reduceIte]
exact token_of_taggedEmbed ? ? k h? i t

section Interpreter

variable (D_0 : QDomain.{0})
variable (j_0 : IsContinuousLatticeProjection D_0.carrier
  (QuantumFunctor
    (QModel (TTEExternalContinuationPower 2)) D_0.carrier))

/-- First-order primitive programs are interpreted by their operational
tagged denotation. -/
theorem interp_firstOrder
  {M : Term (SemanticQubitPrimitive D_0 j_0)}
  (h : FirstOrder M)
  (? : Env
    (SemanticValue (TTEExternalContinuationPower 2) D_0 j_0)) :

```

```

    interp (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0) (semanticPrimitive D_0 j_0) M ? =
        denoteFirstOrder M := by
induction h with
| prim p =>
  rw [interp_prim_apply]
  rfl
| intern hM hN ihM ihN =>
  rw [interp_intern_apply, ihM, ihN]
  rfl
| extern hM hN ihM ihN =>
  rw [interp_extern_apply, ihM, ihN]
  rfl
| prob p hM hN ihM ihN =>
  rw [interp_prob_apply, ihM, ihN]
  rfl

/-- Primitive terms are token-adequate in the interpreter. -/
theorem interp_token_of_primitive
  (p : SemanticQubitPrimitive D_0 j_0)
  (? : SemanticValue (TTEExternalContinuationPower 2) D_0 j_0 ->
    FiniteInstrumentComp 2 PUnit.{1})
  (k : ScottMap
    (SemanticValue (TTEExternalContinuationPower 2) D_0 j_0)
    (TTResult 2))
  (hk : PresentedAt (eval p) k ?)
  (? : Env
    (SemanticValue (TTEExternalContinuationPower 2) D_0 j_0))
  (i : Nat) (t : TTObservationToken 2) :
  t in (interp (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0) (semanticPrimitive D_0 j_0)
    (.prim p) ? i k) <=>
    TTObservationToken.Holds resultCode t ((eval p).bind ?) := by
  rw [interp_primitive]
  exact token_of_primitive p ? k hk i t

end Interpreter

/#! ## General adequacy boundary -/

/-- Embedding order unconditionally recovers every rational coded TT test. -/
theorem general_adequacy_of_embed_le
  (C : OutputCode Nat D)
  {? ? : FiniteInstrumentComp n D}
  (h : embed ? <= embed ?) :
  FiniteInstrumentComp.FinitaryTTRefines C ? ? :=
  finitaryTTRefines_of_embed_le C h

/-- Closed-term token adequacy, available only when the denotation is a
finite embedded instrument. The hypothesis is discharged for first-order
primitives above and is not claimed for arbitrary recursive terms. -/
theorem closed_term_token_adequacy
  {Prim : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor
      (QModel (TTEExternalContinuationPower n)) D_0.carrier))
  [HasComputationChoice
    (SemanticComp (TTEExternalContinuationPower n) D_0 j_0)]
  (primitive : Prim ->
    SemanticComp (TTEExternalContinuationPower n) D_0 j_0)
  (M : Term Prim)
  (? : FiniteInstrumentComp n

```

```

    (SemanticValue (TTEExternalContinuationPower n) D_0 j_0))
  (? : Env (SemanticValue (TTEExternalContinuationPower n) D_0 j_0))
  (hfinite : interp (Q := TTEExternalContinuationPower n)
    (D_0 := D_0) (j_0 := j_0) primitive M ? =
    taggedEmbed ?)
  (? : SemanticValue (TTEExternalContinuationPower n) D_0 j_0 ->
    FiniteInstrumentComp n PUnit.{1})
  (k : ScottMap
    (SemanticValue (TTEExternalContinuationPower n) D_0 j_0)
    (TTResult n))
  (hk : PresentedAt ? k ?)
  (i : Nat) (t : TTObservationToken n) :
  t in (interp (Q := TTEExternalContinuationPower n)
    (D_0 := D_0) (j_0 := j_0) primitive M ? i k) <->
    TTObservationToken.Holds resultCode t (? .bind ?) := by

```

Lean 4 source (lines 401–418)

```

rw [hfinite]
exact token_of_taggedEmbed ? ? k hk i t

/-- The finite physical image is not a Scott retract of the continuation
space whenever a directed family of finite embeddings has a non-finite
supremum. Higher-order recursion may produce such denotations. -/
theorem no_finite_image_retract_of_directed_sup
  {S : Set (TTContinuationPower n D)}
  (hS : S.Nonempty) (hdir : DirectedOn (* <= *) S)
  (hfinite : S.subseteq Set.range (embed (n := n) (D := D)))
  (hnot : sSup S notin Set.range (embed (n := n) (D := D))) :
  FiniteImageScottRetraction n D -> False :=
no_finiteImageScottRetraction_of_directedSup_not_finite
  hS hdir hfinite hnot

end Adequacy

end QLambda

```

A.14 QLambda/ChoiRayObstruction.lean

593 lines.

Lean 4 source (lines 1–400)

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/
import QLambda.InstrumentPower
import QLambda.Saturation
import QLambda.ObservationBasis
import QLambda.FiniteImageNonclosure

/-!
# Rank-one Choi-ray obstruction for register dimension at least two

A nonzero rank-one positive semidefinite Choi matrix determines a ray
under positive scaling. Anything Loewner-below that matrix remains on
the same ray. For register dimension `2 <= n` there are uncountably many
distinct rays, while any approximant generated from a principal finite
instrument, Scott-lower closure, and optional uniform spectral
attenuation contributes only finitely many generating rays.

This is a medium-strength negative theorem: it applies only to that

```

```

restricted approximant class `PhysicalBasisApproximant`. It does **not**
claim that raw `InstrumentPower` admits no `IsOmegaQVA` structure, and
it does not apply to the successful countable `RatCPMatrix` / rounded-
token construction, which separates by dense rational quadratic tests
rather than by interpolating through finitely many physical rays.
-/

```

```

open Matrix Set
open scoped BigOperators ComplexOrder MatrixOrder

```

```

namespace QLambda

```

```

universe u

```

```

/-- A nonzero rank-one Choi matrix, presented as an outer product. -/
structure RankOneChoi (n : Nat) where
  vec : Fin n × Fin n → ?
  ne_zero : vec != 0

```

```

namespace RankOneChoi

```

```

variable {n : Nat}

```

```

/-- The Choi matrix `v v?`. -/
noncomputable def matrix (A : RankOneChoi n) :
  Matrix (Fin n × Fin n) (Fin n × Fin n) ? :=
  vecMulVec A.vec (star A.vec)

```

```

theorem matrix_posSemidef (A : RankOneChoi n) :
  A.matrix.PosSemidef :=
  Matrix.posSemidef_vecMulVec_self_star A.vec

```

```

theorem matrix_apply (A : RankOneChoi n) (p q : Fin n × Fin n) :
  A.matrix p q = A.vec p * star (A.vec q) :=
  rfl

```

```

theorem mul_star_self_eq_zero {z : ?} (h : z * star z = 0) : z = 0 := by
  have hsq : Complex.normSq z = 0 := by
    simp [Complex.normSq, Complex.normSq_eq_conj_mul_self, mul_comm,
      Complex.star_def] using congrArg Complex.re h
  exact Complex.normSq_eq_zero.mp hsq

```

```

theorem matrix_ne_zero (A : RankOneChoi n) : A.matrix != 0 := by
  intro h
  apply A.ne_zero
  ext p
  have hp : A.matrix p p = 0 := by simp [h]
  exact mul_star_self_eq_zero (by simp [matrix_apply] using hp)

```

```

/-- Positive-scaling equivalence of rank-one Choi matrices. -/
def SameRay (A B : RankOneChoi n) : Prop :=
  exists t : ?, 0 < t /\ A.matrix = (t : ?) * B.matrix

```

```

theorem SameRay.refl (A : RankOneChoi n) : SameRay A A :=
  <1, one_pos, by simp>

```

```

theorem SameRay.symm {A B : RankOneChoi n} (h : SameRay A B) :
  SameRay B A := by
  obtain <t, ht, heq> := h
  refine <t⁻¹, inv_pos.mpr ht, ?_>
  apply Matrix.ext
  intro p q
  have hpq : A.matrix p q = (t : ?) * B.matrix p q := by

```



```

    simpa [smul_eq_mul] using
      congrArg (fun M : Matrix (Fin n x Fin n) (Fin n x Fin n) ? => M p q) heq
have ht0 : (t : ?) != 0 := mod_cast ht.ne'
have hBA : B.matrix p q = (t : ?)^-1 * A.matrix p q := by
  rw [hpbq, <- mul_assoc, inv_mul_cancel_0 ht0, one_mul]
simpa [smul_eq_mul, Complex.ofReal_inv] using hBA

theorem SameRay.trans {A B C : RankOneChoi n}
  (hAB : SameRay A B) (hBC : SameRay B C) : SameRay A C := by
  obtain <t, ht, htAB> := hAB
  obtain <s, hs, hsBC> := hBC
  refine <t * s, mul_pos ht hs, ?_>
  rw [htAB, hsBC, smul_smul, Complex.ofReal_mul]

theorem quadratic (A : RankOneChoi n) (w : Fin n x Fin n -> ?) :
  star w ?? (A.matrix *? w) =
    star (star A.vec ?? w) * (star A.vec ?? w) := by
  simp [matrix, vecMulVec, mulVec, dotProduct, Finset.mul_sum,
    mul_left_comm, mul_comm]

theorem dominated_kernel
  (A : RankOneChoi n)
  (M : Matrix (Fin n x Fin n) (Fin n x Fin n) ?)
  (hM : M.PosSemidef) (hle : M <= A.matrix)
  (w : Fin n x Fin n -> ?) (hw : star A.vec ?? w = 0) :
  star w ?? (M *? w) = 0 := by
  have hdiff : (A.matrix - M).PosSemidef := hle
  have hA0 : star w ?? (A.matrix *? w) = 0 := by
    rw [quadratic, hw, star_zero, zero_mul]
  have hqw : 0 <= (star w ?? ((A.matrix - M) *? w)).re :=
    (Complex.nonneg_iff.mp (hdiff.dotProduct_mulVec_nonneg w)).1
  have hsplit :
    (star w ?? ((A.matrix - M) *? w)).re =
      (star w ?? (A.matrix *? w)).re - (star w ?? (M *? w)).re := by
    simp [sub_mulVec, dotProduct_sub]
  have hleRe :
    (star w ?? (M *? w)).re <= (star w ?? (A.matrix *? w)).re := by
    linarith
  have hMnn := hM.dotProduct_mulVec_nonneg w
  have hMre : 0 <= (star w ?? (M *? w)).re :=
    (Complex.nonneg_iff.mp hMnn).1
  have hMim : (star w ?? (M *? w)).im = 0 :=
    (Complex.nonneg_iff.mp hMnn).2.symm
  have hAre : (star w ?? (A.matrix *? w)).re = 0 := by
    simp [hA0]
  have hre : (star w ?? (M *? w)).re = 0 :=
    le_antisymm (hleRe.trans_eq hAre) hMre
  exact Complex.ext hre hMim

theorem self_dot_ne_zero {v : Fin n x Fin n -> ?} (hv : v != 0) :
  star v ?? v != 0 := by
  intro h
  apply hv
  ext p
  have hsum : ? q, Complex.normSq (v q) = 0 := by
    simp [dotProduct, Complex.normSq, Complex.star_def, mul_comm] using
      congrArg Complex.re h
  have hnn : forall q in Finset.univ, 0 <= Complex.normSq (v q) :=
    fun _ => Complex.normSq_nonneg _
  have hp :=
    (Finset.sum_eq_zero_iff_of_nonneg hnn).1 hsum p (Finset.mem_univ _)
  exact Complex.normSq_eq_zero.mp hp

```

```

/-- Domination below a rank-one PSD matrix stays on its ray: the
dominated generator is a nonzero scalar multiple of the original. -/
theorem dominated_stays_on_ray
  (A B : RankOneChoi n) (hle : B.matrix <= A.matrix) :
  SameRay B A := by
  have horth :
    forall w, star A.vec ?? w = 0 -> star B.vec ?? w = 0 := by
    intro w hw
    have hquad :=
      dominated_kernel A B.matrix B.matrix_posSemidef hle w hw
    have : star (star B.vec ?? w) * (star B.vec ?? w) = 0 := by
      simpa [quadratic] using hquad
    exact mul_star_self_eq_zero (by simpa [mul_comm] using this)
  let c := (star A.vec ?? B.vec) / (star A.vec ?? A.vec)
  let w := B.vec - c * A.vec
  have hwA : star A.vec ?? w = 0 := by
    have hden : star A.vec ?? A.vec != 0 := self_dot_ne_zero A.ne_zero
    simp [w, c, dotProduct_sub, smul_eq_mul]
    field_simp [hden]
    ring
  have hwB : star B.vec ?? w = 0 := horth w hwA
  have hw0 : w = 0 := by
    have hdecomp : B.vec = w + c * A.vec := by simp [w]
    have hww : star w ?? w = 0 := by
      have := hwB
      rw [hdecomp] at this
      simpa [dotProduct_add, smul_eq_mul, hwA] using this
    ext p
    have hsum : ? q, Complex.normSq (w q) = 0 := by
      simpa [dotProduct, Complex.normSq, Complex.star_def, mul_comm] using
        congrArg Complex.re hww
    have hnn : forall q in Finset.univ, 0 <= Complex.normSq (w q) :=
      fun _ => Complex.normSq_nonneg _
    exact Complex.normSq_eq_zero.mp
      ((Finset.sum_eq_zero_iff_of_nonneg hnn).1 hsum p (Finset.mem_univ _))
  have hvec : B.vec = c * A.vec := by
    simpa [w, sub_eq_zero] using hw0
  have hc0 : c != 0 := by
    intro hcz
    apply B.ne_zero
    simpa [hvec, hcz]
  refine <Complex.normSq c, Complex.normSq_pos.mpr hc0, ?_>
  apply Matrix.ext
  intro p q
  have hc : (Complex.normSq c : ?) = c * star c := by
    apply Complex.ext <.>
    simp [Complex.normSq, Complex.mul_re, Complex.mul_im,
      Complex.conj_re, Complex.conj_im] <.>
    ring
  simp [matrix, hvec, vecMulVec, smul_eq_mul, hc]
  ring

/-- Uniform spectral attenuation scales every Choi matrix. -/
theorem scale_choi {n m : Nat} (r : ?) (K : KrausFamily n m) :
  KrausFamily.choi (KrausFamily.scale (r : ?) K) =
  ((r : ?) * star (r : ?)) * KrausFamily.choi K := by
  induction K with
  | nil =>
    simp [KrausFamily.scale, KrausFamily.choi]
  | cons A K ih =>
    have hterm :
      KrausFamily.choiTerm ((r : ?) * A) =

```

```

      ((r : ?) * star (r : ?)) * KrausFamily.choiTerm A := by
    ext p q
    simp [KrausFamily.choiTerm, Matrix.smul_apply, smul_eq_mul]
    ring
    rw [KrausFamily.scale, List.map_cons, KrausFamily.choi_cons, hterm]
    change
      ((r : ?) * star (r : ?)) * KrausFamily.choiTerm A +
      KrausFamily.choi (KrausFamily.scale (r : ?) K) =
      ((r : ?) * star (r : ?)) *
      (KrausFamily.choiTerm A + KrausFamily.choi K)
    rw [ih, smul_add]

/-- Uniform attenuation of a rank-one Choi matrix stays on the same ray. -/
theorem attenuation_same_ray (A : RankOneChoi n) (r : ?) (hr : 0 < r) :
  SameRay
    <fun p => (r : ?) * A.vec p, by
      intro h
      apply A.ne_zero
      ext p
      have hp := congrFun h p
      have hr0 : (r : ?) != 0 := mod_cast hr.ne'
      exact mul_left_cancel_0 hr0 (by simpa using hp)> A := by
  refine <r ^ 2, pow_pos hr 2, ?_>
  apply Matrix.ext
  intro p q
  simp [matrix, vecMulVec, smul_eq_mul, Complex.ofReal_pow]
  ring

end RankOneChoi

instance instSetoidRankOneChoi (n : Nat) : Setoid (RankOneChoi n) where
  r := RankOneChoi.SameRay
  iseqv :=
    <RankOneChoi.SameRay.refl, RankOneChoi.SameRay.symm,
    RankOneChoi.SameRay.trans>

/-- The set of rank-one Choi rays, as a quotient of nonzero outer
products by positive scaling. -/
def ChoiRay (n : Nat) : Type :=
  Quotient (instSetoidRankOneChoi n)

def ChoiRay.mk {n : Nat} (A : RankOneChoi n) : ChoiRay n :=
  Quotient.mk _ A

/-- Standard computational-basis vector on the Choi coordinate `p`. -/
def basisVec (n : Nat) (p : Fin n x Fin n) : Fin n x Fin n -> ? :=
  fun q => if q = p then 1 else 0

theorem basisVec_ne_zero (n : Nat) (p : Fin n x Fin n) :
  basisVec n p != 0 := by
  intro h
  have := congrFun h p
  simp [basisVec] at this

def basisRankOne (n : Nat) (p : Fin n x Fin n) : RankOneChoi n :=
  <basisVec n p, basisVec_ne_zero n p>

def basisRay (n : Nat) (p : Fin n x Fin n) : ChoiRay n :=
  ChoiRay.mk (basisRankOne n p)

theorem basisRankOne_matrix (n : Nat) (p q r : Fin n x Fin n) :
  (basisRankOne n p).matrix q r =
  if q = p /\ r = p then 1 else 0 := by

```

```

simp [basisRankOne, RankOneChoi.matrix, basisVec, vecMulVec]
split_ifs <;> simp_all

/-- Distinct computational-basis coordinates determine distinct rays. -/
theorem basisRay_injective (n : Nat) :
  Function.Injective (basisRay n) := by
  intro p q hpq
  have h := Quotient.exact hpq
  obtain <t, ht, heq> := h
  have hpp : (basisRankOne n p).matrix p p = 1 := by
    simp [basisRankOne_matrix]
  have := congrArg (fun M : Matrix _ _ ? => M p p) heq
  simp [hpp, basisRankOne_matrix, smul_eq_mul] at this
  by_cases hpe : p = q
  * exact hpe
  * simp [hpe] at this

/-- In dimension one the Choi index set is a singleton. -/
theorem choiRay_basis_n_one_unique (p : Fin 1 x Fin 1) :
  basisRay 1 p = basisRay 1 (0, 0) := by
  have h1 : p.1 = 0 := Subsingleton.elim _ _
  have h2 : p.2 = 0 := Subsingleton.elim _ _
  apply congrArg (basisRay 1)
  exact Prod.ext h1 h2

/-- Dimension-one sanity: the computational-basis family is a singleton. -/
theorem n_one_basis_subsingleton :
  Subsingleton (Set.range (basisRay 1)) := by
  refine <fun x y => ?_>
  rcases x with <p, hp>
  rcases y with <q, hq>
  apply Subtype.ext
  obtain <i, rfl> := hp
  obtain <j, rfl> := hq
  simp [choiRay_basis_n_one_unique]

/-- For `2 <= n` the computational-basis family already supplies more
than one ray. -/
theorem two_le_n_basisRays_nontrivial {n : Nat} (hn : 2 <= n) :
  basisRay n (<0, Nat.zero_lt_of_lt hn>, <0, Nat.zero_lt_of_lt hn>) !=
  basisRay n (<0, Nat.zero_lt_of_lt hn>, <1, hn>) := by
  intro h
  have := basisRay_injective n h
  simp at this

/-- Mixing weight on a two-dimensional Choi coordinate plane. -/
noncomputable def mixVec (n : Nat) (hn : 2 <= n) (t : ?) :
  Fin n x Fin n -> ? :=
  fun p =>
    if p = (<0, Nat.zero_lt_of_lt hn>, <0, Nat.zero_lt_of_lt hn>) then
      Real.sqrt t
    else if p = (<0, Nat.zero_lt_of_lt hn>, <1, hn>) then
      Real.sqrt (1 - t)
    else 0

theorem mixVec_ne_zero (n : Nat) (hn : 2 <= n) {t : ?}
  (ht_0 : 0 < t) (_ht_1 : t < 1) :
  mixVec n hn t != 0 := by
  intro h
  have h0 :=
    congrFun h (<0, Nat.zero_lt_of_lt hn>, <0, Nat.zero_lt_of_lt hn>)
  simp [mixVec] at h0
  exact (Real.sqrt_pos.mpr ht_0).ne' (by simpa using h0)

```

```

noncomputable def mixRankOne (n : Nat) (hn : 2 <= n) {t : ?}
  (ht_0 : 0 < t) (ht_1 : t < 1) : RankOneChoi n :=
  <mixVec n hn t, mixVec_ne_zero n hn ht_0 ht_1>

noncomputable def mixRay (n : Nat) (hn : 2 <= n) {t : ?}
  (ht_0 : 0 < t) (ht_1 : t < 1) : ChoiRay n :=
  ChoiRay.mk (mixRankOne n hn ht_0 ht_1)

theorem mixRankOne_diag00 (n : Nat) (hn : 2 <= n) {t : ?}
  (ht_0 : 0 < t) (ht_1 : t < 1) :
  (mixRankOne n hn ht_0 ht_1).matrix
    (<0, Nat.zero_lt_of_lt hn>, <0, Nat.zero_lt_of_lt hn>)
    (<0, Nat.zero_lt_of_lt hn>, <0, Nat.zero_lt_of_lt hn>) = t := by
  have hpos : 0 <= t := le_of_lt ht_0
  have hvec :
    mixVec n hn t
      (<0, Nat.zero_lt_of_lt hn>, <0, Nat.zero_lt_of_lt hn>) =
      Real.sqrt t := by
    simp [mixVec]
  rw [RankOneChoi.matrix_apply]
  change mixVec n hn t
    (<0, Nat.zero_lt_of_lt hn>, <0, Nat.zero_lt_of_lt hn>) *
    star (mixVec n hn t
      (<0, Nat.zero_lt_of_lt hn>, <0, Nat.zero_lt_of_lt hn>)) = t
  rw [hvec]
  simp [Complex.conj_ofReal]
  norm_cast
  rw [← pow_two]
  exact Real.sq_sqrt hpos

theorem mixRankOne_diag01 (n : Nat) (hn : 2 <= n) {t : ?}
  (ht_0 : 0 < t) (ht_1 : t < 1) :
  (mixRankOne n hn ht_0 ht_1).matrix
    (<0, Nat.zero_lt_of_lt hn>, <1, hn>)
    (<0, Nat.zero_lt_of_lt hn>, <1, hn>) = 1 - t := by
  have hpos : 0 <= 1 - t := sub_nonneg.mpr ht_1.le
  have hvec :
    mixVec n hn t (<0, Nat.zero_lt_of_lt hn>, <1, hn>) =
    Real.sqrt (1 - t) := by
    simp [mixVec]
  rw [RankOneChoi.matrix_apply]
  change mixVec n hn t (<0, Nat.zero_lt_of_lt hn>, <1, hn>) *
    star (mixVec n hn t (<0, Nat.zero_lt_of_lt hn>, <1, hn>)) =
    1 - t
  rw [hvec]
  simp [Complex.conj_ofReal]
  norm_cast
  rw [← pow_two]
  exact Real.sq_sqrt hpos

/-- Distinct mixing weights in `(0, 1)` determine distinct rays. -/
theorem mixRay_injective {n : Nat} (hn : 2 <= n)
  {t s : ?} (ht_0 : 0 < t) (ht_1 : t < 1)
  (hs_0 : 0 < s) (hs_1 : s < 1)
  (h : mixRay n hn ht_0 ht_1 = mixRay n hn hs_0 hs_1) : t = s := by
  have hex := Quotient.exact h
  obtain <u, hu, heq> := hex
  let p00 : Fin n × Fin n :=
    (<0, Nat.zero_lt_of_lt hn>, <0, Nat.zero_lt_of_lt hn>)
  let p01 : Fin n × Fin n :=
    (<0, Nat.zero_lt_of_lt hn>, <1, hn>)
  have h00 := congrArg (fun M : Matrix _ _ ? => M p00 p00) heq

```

```
have h11 := congrArg (fun M : Matrix _ _ ? => M p01 p01) heq
```

Lean 4 source (lines 401–593)

```
simp only [Matrix.smul_apply, smul_eq_mul] at h00 h11
rw [mixRankOne_diag00 n hn ht_0 ht_1, mixRankOne_diag00 n hn hs_0 hs_1] at h00
rw [mixRankOne_diag01 n hn ht_0 ht_1, mixRankOne_diag01 n hn hs_0 hs_1] at h11
have : t * (1 - s) = s * (1 - t) := by
  have ht' := congrArg Complex.re h00
  have hs' := congrArg Complex.re h11
  simp at ht' hs'
  nlinarith
nlinarith

/-- Interior mixing weights determine mixing rays. -/
noncomputable def mixRayOfIoo (n : Nat) (hn : 2 <= n)
  (t : Set.Ioo (0 : ?) 1) : ChoiRay n :=
  mixRay n hn t.2.1 t.2.2

theorem mixRayOfIoo_injective {n : Nat} (hn : 2 <= n) :
  Function.Injective (mixRayOfIoo n hn) :=
  fun t s hts =>
    Subtype.ext (mixRay_injective hn t.2.1 t.2.2 s.2.1 s.2.2 hts)

/-- A generating rank-one summand of one square Kraus operator. -/
noncomputable def krausRay {n : Nat} (A : KrausOperator n n)
  (hne : (fun p : Fin n x Fin n => A p.1 p.2) != 0) : ChoiRay n :=
  ChoiRay.mk <fun p => A p.1 p.2, hne>

/-- Generating rays of a finite square Kraus family. -/
noncomputable def krausFamilyRays {n : Nat} (K : KrausFamily n n) :
  Set (ChoiRay n) :=
  {r | exists A in K, exists hne : (fun p : Fin n x Fin n => A p.1 p.2) != 0,
    r = krausRay A hne}

theorem krausFamilyRays_nil {n : Nat} :
  krausFamilyRays ([] : KrausFamily n n) = {} := by
  ext r
  simp [krausFamilyRays]

theorem krausFamilyRays_finite {n : Nat} (K : KrausFamily n n) :
  (krausFamilyRays K).Finite := by
  induction K with
  | nil =>
    simp [krausFamilyRays_nil]
  | cons A K ih =>
    by_cases hA : (fun p : Fin n x Fin n => A p.1 p.2) != 0
    * refine (ih.insert (krausRay A hA)).subset ?_
      intro r hr
      obtain <B, hB, hne, rfl> := hr
      simp only [List.mem_cons] at hB
      rcases hB with hBA | hBK
      * subst B
        exact Or.inl rfl
      * exact Or.inr <B, hBK, hne, rfl>
    * refine ih.subset ?_
      intro r hr
      obtain <B, hB, hne, rfl> := hr
      simp only [List.mem_cons] at hB
      rcases hB with hBA | hBK
      * subst B
        exact (hA hne).elim
      * exact <B, hBK, hne, rfl>
```

```

/-- Generating rays of a finite instrument, taken over every outcome
branch. -/
noncomputable def instrumentRays {n : Nat} {D : Type u}
  (? : FiniteInstrumentComp n D) : Set (ChoiRay n) :=
  ? o : ?.Outcome, krausFamilyRays (?.branch o)

theorem instrumentRays_finite {n : Nat} {D : Type u}
  (? : FiniteInstrumentComp n D) :
  (instrumentRays ?).Finite :=
  finite_iUnion fun _ => krausFamilyRays_finite _

/-- Approximants generated from principal finite instruments, binary
Scott-lower closure, and optional uniform spectral attenuation. Binary
closure encodes any finite generator list. This is the exact
medium-strength class used by the obstruction; raw `InstrumentPower` is
not claimed to lie outside `?QVA`. -/
inductive PhysicalBasisApproximant (n : Nat) where
  | ofFinite {D : Type} (? : FiniteInstrumentComp n D) :
    PhysicalBasisApproximant n
  | lowerClose (left right : PhysicalBasisApproximant n) :
    PhysicalBasisApproximant n
  | attenuate (r : ?) (hr_0 : 0 < r) (hr_1 : r <= 1)
    (a : PhysicalBasisApproximant n) : PhysicalBasisApproximant n

/-- Generating rays of a physical-basis approximant. Lower closure
unions the rays of its generators; uniform attenuation preserves ray
direction. -/
noncomputable def PhysicalBasisApproximant.rays {n : Nat} :
  PhysicalBasisApproximant n -> Set (ChoiRay n)
  | .ofFinite ? => instrumentRays ?
  | .lowerClose left right =>
    PhysicalBasisApproximant.rays left ∪
    PhysicalBasisApproximant.rays right
  | .attenuate _ _ _ a => PhysicalBasisApproximant.rays a

theorem attenuate_preserves_rays {n : Nat}
  (r : ?) (hr_0 : 0 < r) (hr_1 : r <= 1)
  (a : PhysicalBasisApproximant n) :
  (PhysicalBasisApproximant.attenuate r hr_0 hr_1 a).rays = a.rays :=
  rfl

theorem PhysicalBasisApproximant.rays_finite {n : Nat}
  (a : PhysicalBasisApproximant n) : a.rays.Finite := by
  induction a with
  | ofFinite ? =>
    exact instrumentRays_finite ?
  | lowerClose left right ihL ihR =>
    exact ihL.union ihR
  | attenuate r hr_0 hr_1 a ih =>
    exact ih

/-- A countable family of physical-basis approximants covers only
countably many generating rays. -/
theorem countable_union_approximant_rays {n : Nat}
  (family : Nat -> PhysicalBasisApproximant n) :
  (? k, (family k).rays).Countable :=
  Set.countable_iUnion fun k =>
    (PhysicalBasisApproximant.rays_finite (family k)).countable

/-- The uncountable mixing family, as a set of rays. -/
def mixRaySet (n : Nat) (hn : 2 <= n) : Set (ChoiRay n) :=
  {r | exists t : ?, exists ht_0 : 0 < t, exists ht_1 : t < 1, r = mixRay n hn ht_0 ht_1}

```

```

theorem mixRayOfIoo_mem {n : Nat} (hn : 2 <= n)
  (t : Set.Ioo (0 : ?) 1) :
  mixRayOfIoo n hn t in mixRaySet n hn :=
  <t.1, t.2.1, t.2.2, rfl>

theorem mixRaySet_injects_Ioo {n : Nat} (hn : 2 <= n) :
  Function.Injective
    (fun t : Set.Ioo (0 : ?) 1 =>
      (<mixRayOfIoo n hn t, mixRayOfIoo_mem hn t> : mixRaySet n hn)) :=
  fun _t _s hts => mixRayOfIoo_injective hn (congrArg Subtype.val hts)

/-- A countable physical-basis cover would make the mixing-weight
interval countable. -/
theorem covering_implies_countable_Ioo {n : Nat} (hn : 2 <= n)
  (approx : Nat -> PhysicalBasisApproximant n)
  (hcover : mixRaySet n hn subseq ? k, (approx k).rays) :
  Countable (Set.Ioo (0 : ?) 1) := by
  have : Countable (mixRaySet n hn) :=
    (countable_union_approximant_rays approx).mono hcover
  exact Function.Injective.countable (mixRaySet_injects_Ioo hn)

/-- No countable family of physical-basis approximants can cover the
mixing family when `2 <= n`, given that `(0, 1)` is uncountable. The
formal content is the injection of that interval through rank-one Choi
rays versus finite generating-ray coverage. -/
theorem no_omegaQVA_of_physicalBasisApproximants {n : Nat}
  (hn : 2 <= n)
  (approx : Nat -> PhysicalBasisApproximant n)
  (hIoo : not Countable (Set.Ioo (0 : ?) 1)) :
  not mixRaySet n hn subseq ? k, (approx k).rays :=
  fun hcover => hIoo (covering_implies_countable_Ioo hn approx hcover)

/-- Dimension-one sanity: the unique computational-basis ray is among
the generating rays of the one-dimensional identity instrument. -/
theorem n_one_identity_covers_the_ray :
  basisRay 1 (0, 0) in
  instrumentRays
    (FiniteInstrumentComp.unit (n := 1) (D := Unit) ()) := by
  rw [instrumentRays, Set.mem_iUnion]
  refine <(), ?_>
  refine <(1 : KrausOperator 1 1), ?mem, ?hne, ?eq>
  * simp [FiniteInstrumentComp.unit, KrausFamily.identity, krausFamilyRays]
  * intro h
  have := congrFun h (0, 0)
  simp [Matrix.one_apply] at this
  * apply Quotient.sound
  refine <1, one_pos, ?_>
  apply Matrix.ext
  intro p q
  have hp : p = (0, 0) := Prod.ext (Subsingleton.elim _ _) (Subsingleton.elim _ _)
  have hq : q = (0, 0) := Prod.ext (Subsingleton.elim _ _) (Subsingleton.elim _ _)
  simp [krausRay, basisRankOne, RankOneChoi.matrix, basisVec, vecMulVec,
    Matrix.one_apply, hp, hq]

/-- The successful countable `RatCPMatrix` / rounded-token construction
is outside the scope of this obstruction: its separators are dense
rational quadratic tests, not a countable family of finite generating
rays. Gaussian-rational Choi vectors already separate Hermitian
matrices, so an approximate identity can interpolate without ever
selecting a representative of every rank-one ray. -/
theorem obstruction_does_not_apply_to_rational_tokens {n : Nat}
  (J K : Matrix (Fin n x Fin n) (Fin n x Fin n) ?)
  (hJ : J.IsHermitian) (hK : K.IsHermitian)

```



```

    (h : forall v : RatChoiVec n,
      ChoiTest.eval (v, <0, le_rfl>) J <=
        ChoiTest.eval (v, <0, le_rfl>) K) :
    J <= K :=
    ChoiTest.le_of_rational_quadratic_le hJ hK h
end QLambda

```

A.15 QLambda/Effects.lean

87 lines.

Lean 4 source

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/
import Mathlib.Order.UpperLower.CompleteLattice
import QLambda.Syntax
import Scott1972.ContinuousLattice.FunctionSpaces

/-!
# Effect powerdomains besides `Q`

Paper S1-2. Internal choice `sqcap` is interpreted by a nondeterministic
powerdomain `?`. Here `?(D)` is the complete lattice of upper sets
(a Smyth-style carrier; Scott-closed convex Plotkin is not yet built).
External choice `[]` needs an environment / synchrony structure and is
only a class, with no global instance.
-/

namespace QLambda

open Scott1972.ContinuousLattice

universe u

/-- Upper-set powerdomain of `D` (Smyth carrier, inclusion order). -/
abbrev NondetPower (D : Type u) [Preorder D] : Type u :=
  UpperSet D

noncomputable instance instCompleteLatticeNondetPower (D : Type u)
  [CompleteLattice D] : CompleteLattice (NondetPower D) :=
  inferInstance

/-- Algebra of internal choice on a domain. -/
class HasInternalChoice (D : Type u) [CompleteLattice D] where
  intern : D -> D -> D

/-- Algebra of external / interactive choice. -/
class HasExternalChoice (D : Type u) [CompleteLattice D] where
  extern : D -> D -> D

/-- Scott-continuous choice operations consumed by the computation-valued
interpreter. This interface keeps classical probabilistic, internal, and
external choice distinct; concrete models may realize them differently. -/
class HasComputationChoice (C : Type u) [CompleteLattice C] where
  prob : Prob -> ScottMap (C x C) C
  intern : ScottMap (C x C) C
  extern : ScottMap (C x C) C
  left_le_intern : forall a b, a <= intern (a, b)

```

```

    right_le_intern : forall a b, b <= intern (a, b)

/-- An external observer resolves an external choice. Selection is a
Bool-indexed family of Scott-continuous maps on computations; it is not a
lattice comparison and does not identify external with internal choice.

The laws here concern only a top-level `extern`. Closure under application
contexts is a separate property of a model's sequencing operation. -/
class HasExternalSelection (C : Type u) [CompleteLattice C]
  [HasComputationChoice C] where
  select : Bool -> ScottMap C C
  select_false : forall a b,
    select false (HasComputationChoice.extern (a, b)) = a
  select_true : forall a b,
    select true (HasComputationChoice.extern (a, b)) = b

/-- Denotational meaning of a weighted branch transition. The relation keeps
the transition weight explicit rather than erasing it into lattice order.

These are deliberately only the two top-level probabilistic-choice laws.
Soundness of `WeightedStep.app_left` and `WeightedStep.app_right` additionally
requires closure of `weightedBranch` under the corresponding semantic
application contexts (equivalently, suitable laws for Kleisli sequencing);
that closure is not implied by this interface. -/
class HasWeightedBranchSemantics (C : Type u) [CompleteLattice C]
  [HasComputationChoice C] where
  weightedBranch : C -> Prob -> C -> Prop
  prob_left : forall (p : Prob) (a b : C), 0 <= p -> p <= 1 ->
    weightedBranch (HasComputationChoice.prob p (a, b)) p a
  prob_right : forall (p : Prob) (a b : C), 0 <= p -> p <= 1 ->
    weightedBranch (HasComputationChoice.prob p (a, b)) (1 - p) b

/-- Internal choice on `?(D)` is the join of upper sets. -/
instance instHasInternalChoiceNondet (D : Type u)
  [CompleteLattice D] : HasInternalChoice (NondetPower D) where
  intern := (* sqsup *)

end QLambda

```

A.16 QLambda/FiniteImageNonclosure.lean

708 lines.

Lean 4 source (lines 1–400)

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/
import QLambda.TTPhysicalEmbedding

/-!
# A finite-coordinate criterion for non-closure of the physical image

A finite instrument can exhibit only finitely many different Choi matrices
when tested by the coordinate opens `{A : Set Nat | j in A}`. Consequently, any
continuation with injectively many recovered coordinate observations cannot
be a finite physical embedding.
-/

namespace QLambda

```

```

open Matrix
open scoped BigOperators ComplexOrder MatrixOrder
open Scott1972.ContinuousLattice

namespace TTPhysicalEmbedding

/-- The upper Scott-open coordinate predicate on the powerset domain. -/
def coordinateSet (j : Nat) : Set (Set Nat) :=
  {A | j in A}

/-! ## A concrete dyadic prefix chain -/

/-- The nested classical value returned by the `i`th dyadic branch. -/
def dyadicPrefix (i : Nat) : Set Nat :=
  Set.Iic i

/-- The probability carried by the `i`th branch. -/
noncomputable def dyadicWeight (i : Nat) : ? :=
  (1 / 2 : ?) ^ (i + 1)

/-- A one-dimensional Kraus branch with Choi weight `2^-??+1?`. -/
noncomputable def dyadicBranch (i : Nat) : KrausFamily 1 1 :=
  KrausFamily.scale (Real.sqrt (dyadicWeight i))
    (KrausFamily.identity 1)

theorem dyadicWeight_nonneg (i : Nat) : 0 <= dyadicWeight i := by
  unfold dyadicWeight
  positivity

theorem dyadicWeight_pos (i : Nat) : 0 < dyadicWeight i := by
  unfold dyadicWeight
  positivity

theorem dyadicBranch_applyMat
  (i : Nat) (? : Matrix (Fin 1) (Fin 1) ?) :
  KrausFamily.applyMat (dyadicBranch i) ? =
    (dyadicWeight i : ?) * ? := by
  rw [dyadicBranch, KrausFamily.applyMat_scale,
    KrausFamily.applyMat_identity]
  have hsqrt :
    (Real.sqrt (dyadicWeight i) : ?) *
      star (Real.sqrt (dyadicWeight i) : ?) =
        dyadicWeight i := by
  simp only [Complex.star_def, Complex.conj_ofReal, <- Complex.ofReal_mul]
  norm_cast
  simp [pow_two] using Real.sq_sqrt (dyadicWeight_nonneg i)
  rw [hsqrt]

theorem sum_dyadicWeight (m : Nat) :
  (? i : Fin (m + 1), dyadicWeight i) =
    1 - (1 / 2 : ?) ^ (m + 1) := by
  rw [ <- Finset.sum_range ]
  simp only [dyadicWeight, pow_succ']
  rw [ <- Finset.mul_sum, geom_sum_eq (by norm_num : (1 / 2 : ?) != 1)]
  field_simp
  ring

/-- The first `m+1` branches of the countably supported dyadic instrument. -/
noncomputable def dyadicStage (m : Nat) :
  FiniteInstrumentComp 1 (Set Nat) where
  Outcome := Fin (m + 1)
  branch := fun i => dyadicBranch i
  value := fun i => dyadicPrefix i

```

```

trace_nonincreasing := by
  intro ? h?
  simp_rw [dyadicBranch_applyMat, Matrix.trace_smul]
  have hre (x : ?) :
    (((x : ?) * Matrix.trace ?).re) =
      x * (Matrix.trace ?).re := by
  rw [smul_eq_mul, Complex.mul_re]
  simp
  simp_rw [hre]
  rw [ <- Finset.sum_mul, sum_dyadicWeight]
  have htrace : 0 <= (Matrix.trace ?).re := by
    simp [Matrix.trace] using
      (Finset.sum_nonneg fun (j : Fin 1) (_ : j in Finset.univ) =>
        (Complex.nonneg_iff.mp h?.diag_nonneg).1)
  nlinarith [show 0 <= (1 / 2 : ?) ^ (m + 1) by positivity]

private theorem choi_wpKraus_eq_sum
  (? : FiniteInstrumentComp 1 (Set Nat))
  (P : Set Nat -> KrausFamily 1 1) :
  KrausFamily.choi (?wpKraus P) =
    ? o : ?.Outcome,
    KrausFamily.choi
      (KrausFamily.comp (P (?value o)) (?branch o)) := by
classical
unfold FiniteInstrumentComp.wpKraus
rw [FiniteInstrumentComp.choi_flatMap]
simp

theorem dyadicStage_wpKraus_refines
  (m : Nat) (P : Set Nat -> KrausFamily 1 1) :
  KrausFamily.Refines
    ((dyadicStage m).wpKraus P)
    ((dyadicStage (m + 1)).wpKraus P) := by
  apply KrausFamily.residualRefines_of_choiRefines
  rw [KrausFamily.ChoiRefines, choi_wpKraus_eq_sum,
    choi_wpKraus_eq_sum]
  change
    (? i : Fin (m + 1),
      KrausFamily.choi
        (KrausFamily.comp (P (dyadicPrefix i)) (dyadicBranch i))) <=
    ? i : Fin (m + 2),
      KrausFamily.choi
        (KrausFamily.comp (P (dyadicPrefix i)) (dyadicBranch i))
  conv_rhs => rw [Fin.sum_univ_castSucc]
  apply le_add_of_nonneg_right
  exact KrausFamily.choi_nonneg _

theorem dyadicStage_bind_finitaryTTRefines
  (m : Nat) (? : Set Nat -> FiniteInstrumentComp 1 PUnit.{1}) :
  FiniteInstrumentComp.FinitaryTTRefines
    TTContinuation.resultCode
    ((dyadicStage m).bind ?) ((dyadicStage (m + 1)).bind ?) := by
  intro c
  exact KrausFamily.residualRefines_trans
    (KrausFamily.residualRefines_of_semEq
      (FiniteInstrumentComp.wpKraus_bind_semEq
        (dyadicStage m) ? (c.decode TTContinuation.resultCode)))
    (KrausFamily.residualRefines_trans
      (dyadicStage_wpKraus_refines m
        (fun d => (? d).wpKraus (c.decode TTContinuation.resultCode)))
      (KrausFamily.residualRefines_of_semEq
        (KrausFamily.applySemEq_symm
          (FiniteInstrumentComp.wpKraus_bind_semEq

```

```

      (dyadicStage (m + 1)) ?
      (c.decode TTContinuation.resultCode))))))

/-- Each dyadic stage embeds below its successor. -/
theorem embed_dyadicStage_le_succ (m : Nat) :
  embed (dyadicStage m) <= embed (dyadicStage (m + 1)) := by
  let injectOutcome : (dyadicStage m).Outcome ->
    (dyadicStage (m + 1)).Outcome :=
    Fin.castSucc
  let retract : (dyadicStage (m + 1)).Outcome ->
    (dyadicStage m).Outcome :=
    Fin.lastCases (<0, Nat.zero_lt_succ m> : Fin (m + 1)) id
  apply embed_le_of_outcome_retract
    (dyadicStage m) (dyadicStage (m + 1))
  injectOutcome retract
* intro o
  exact Fin.lastCases_castSucc o
* intro o
  rfl
* intro q
  refine Fin.lastCases ?_ (fun i => ?_) q
* simp only [retract, Fin.lastCases_last, dyadicStage]
  change dyadicPrefix 0 subseq dyadicPrefix (m + 1)
  intro x hx
  change x <= 0 at hx
  change x <= m + 1
  omega
* simp only [retract, Fin.lastCases_castSucc, dyadicStage]
  change dyadicPrefix i subseq dyadicPrefix i
  exact le_rfl
* exact dyadicStage_bind_finitaryTTRefines m

/-- The range of the concrete stage embeddings is directed. -/
theorem directedOn_range_embed_dyadicStage :
  DirectedOn (* <= *) (Set.range fun m => embed (dyadicStage m)) := by
  rw [directedOn_range]
  intro i j
  refine <max i j, ?_, ?_>
* exact monotone_nat_of_le_succ
  embed_dyadicStage_le_succ (le_max_left i j)
* exact monotone_nat_of_le_succ
  embed_dyadicStage_le_succ (le_max_right i j)

/-! ## Rational coordinate posts -/

/-- The coordinate predicate as a Scott-open output observation. -/
def coordinateOpen (j : Nat) : OutputObservation (Set Nat) where
  carrier := coordinateSet j
  isScottOpen := by
    constructor
    * intro A B hAB hj
      exact hAB hj
    * intro S hS _hdir hj
      change j in ?_0 S at hj
      obtain <A, hAS, hjA> := Set.mem_sUnion.mp hj
      exact <A, hAS, hjA>

/-- The natural-number code of coordinate Scott opens. -/
def coordinateCode : OutputCode Nat (Set Nat) :=
  <coordinateOpen>

/-- The rational zero TNI Choi code. -/
noncomputable def rationalZero (n : Nat) : RatTNICPMatrix n where

```

```

cp := {
  matrix := 0
  posSemidef := by
    convert (Matrix.PosSemidef.zero :
      (0 : Matrix (Fin n x Fin n) (Fin n x Fin n) ?).PosSemidef) using 1
    ext p q
    simp [RatChoiMatrix.toComplex] }
trace_nonincreasing := by
  intro ? h?
  have hz :
    KrausFamily.SemEq
      (RatCPMatrix.realize {
        matrix := 0
        posSemidef := by
          convert (Matrix.PosSemidef.zero :
            (0 : Matrix (Fin n x Fin n) (Fin n x Fin n) ?).PosSemidef) using 1
          ext p q
          simp [RatChoiMatrix.toComplex] })
      (KrausFamily.zero : KrausFamily n n) := by
    apply KrausFamily.semEq_of_choi_eq
    rw [RatCPMatrix.choi_realize]
    change
      (RatChoiMatrix.toComplex (0 : RatChoiMatrix n)) =
      (0 : Matrix (Fin n x Fin n) (Fin n x Fin n) ?)
    ext p q
    simp [RatChoiMatrix.toComplex]
  rw [hz, KrausFamily.applyMat_zero, Matrix.trace_zero, Complex.zero_re]
  simp [Matrix.trace] using
    (Finset.sum_nonneg fun (j : Fin n) (_ : j in Finset.univ) =>
      (Complex.nonneg_iff.mp h?.diag_nonneg).1)

@[simp]
theorem rationalZero_toComplex (n : Nat) :
  (rationalZero n).toComplex = 0 := by
  ext p q
  simp [rationalZero, RatTNICPMatrix.toComplex, RatCPMatrix.toComplex,
    RatChoiMatrix.toComplex]

theorem rationalZero_realize_semEq_zero (n : Nat) :
  KrausFamily.SemEq (rationalZero n).realize
    (KrausFamily.zero : KrausFamily n n) := by
  apply KrausFamily.semEq_of_choi_eq
  rw [RatTNICPMatrix.choi_realize, rationalZero_toComplex,
    show KrausFamily.choi
      (KrausFamily.zero : KrausFamily n n) = 0 by
      exact KrausFamily.choi_nil]

/-- The rational identity/zero post selected by membership in coordinate `j`. -/
noncomputable def coordinatePost (j : Nat) : RatStepPostCode 1 where
  arity := 1
  opens := fun _ => j
  table := fun s =>
    if s 0 then RatTNICPMatrix.identity 1 else rationalZero 1
  table_mono := by
    intro s t hst
    cases hs : s 0 <;> cases ht : t 0
  * simp
  * simp
  * rw [Matrix.le_iff]
  * simp using RatTNICPMatrix.toComplex_posSemidef
    (RatTNICPMatrix.identity 1)
  * have h := hst 0
  * exfalso

```

```

    exact (by decide : not (true <= false)) (by simp [hs, ht] using h)
  * simp

/-- The operation selected by one coordinate membership bit. -/
noncomputable def coordinateTNI (j : Nat) (A : Set Nat) : RatTNICPMatrix 1 := by
  classical
  exact if j in A then RatTNICPMatrix.identity 1 else rationalZero 1

theorem coordinatePost_decodedTNI (j : Nat) (A : Set Nat) :
  (coordinatePost j).decodedTNI coordinateCode A =
    coordinateTNI j A := by
  classical
  unfold RatStepPostCode.decodedTNI
  change
    (if (if j in A then true else false) then
      RatTNICPMatrix.identity 1 else rationalZero 1) = _
  by_cases h : j in A
  * simp [coordinateTNI, h]
  * simp [coordinateTNI, h]

theorem coordinatePost_decode_apply (j : Nat) (A : Set Nat) :
  (coordinatePost j).decode coordinateCode A =
    (coordinateTNI j A).realize := by
  change (coordinatePost j).decodedKraus coordinateCode A =
    (coordinateTNI j A).realize
  change
    ((coordinatePost j).decodedTNI coordinateCode A).realize =
      (coordinateTNI j A).realize
  rw [coordinatePost_decodedTNI]

/-- The finite result operation representing one coordinate indicator. -/
noncomputable def coordinateResult (j : Nat) (A : Set Nat) :
  FiniteInstrumentComp 1 PUnit.{1} :=
  codedResult coordinateCode (coordinatePost j) A

theorem coordinateResult_eq_of_mem_iff
  {j k : Nat} {A : Set Nat} (h : j in A <=> k in A) :
  coordinateResult j A = coordinateResult k A := by
  unfold coordinateResult codedResult RatStepPostCode.decodedOperation
  rw [coordinatePost_decodedTNI, coordinatePost_decodedTNI]
  classical
  simp only [coordinateTNI]
  rw [if_congr h rfl rfl]

/-- Select a Kraus branch exactly when coordinate `j` is present. -/
noncomputable def coordinateSelected
  (j : Nat) (A : Set Nat) (K : KrausFamily 1 1) : KrausFamily 1 1 := by
  classical
  exact if j in A then K else KrausFamily.zero

theorem coordinatePost_comp_semEq
  (j : Nat) (A : Set Nat) (K : KrausFamily 1 1) :
  KrausFamily.SemEq
    (KrausFamily.comp ((coordinatePost j).decode coordinateCode A) K)
    (coordinateSelected j A K) := by
  classical
  rw [coordinatePost_decode_apply]
  by_cases h : j in A
  * simp only [coordinateTNI, coordinateSelected, h, reduceIte]
  intro ?
  rw [KrausFamily.applyMat_comp,
    RatTNICPMatrix.realize_identity_semEq,
    KrausFamily.applyMat_identity]

```

```

* simp only [coordinateTNI, coordinateSelected, h, reduceIte]
intro ?
rw [KrausFamily.applyMat_comp,
    rationalZero_realize_semEq_zero,
    KrausFamily.applyMat_zero, KrausFamily.applyMat_zero]

theorem dyadicBranch_choi_entry (i : Nat) :
  (KrausFamily.choi (dyadicBranch i)
    ((0, 0) : Fin 1 x Fin 1) ((0, 0) : Fin 1 x Fin 1)).re =
    dyadicWeight i := by
  rw [← KrausFamily.applyMat_matrixUnit (dyadicBranch i)
      ((0, 0) : Fin 1 x Fin 1) ((0, 0) : Fin 1 x Fin 1),
      dyadicBranch_applyMat]
  simp [KrausFamily.matrixUnit]

theorem dyadicStage_coordinateChoi_entry (m j : Nat) :
  (KrausFamily.choi
    ((dyadicStage m).wpKraus
      ((coordinatePost j).decode coordinateCode))
    ((0, 0) : Fin 1 x Fin 1) ((0, 0) : Fin 1 x Fin 1)).re =
    ? i : Fin (m + 1),
    if j <= i then dyadicWeight i else 0 := by
  rw [choi_wpKraus_eq_sum]
  rw [Matrix.sum_apply]
  change Complex.reCLM _ = _
  rw [map_sum]
  simp only [dyadicStage]
  apply Fintype.sum_congr
  intro i
  have hsem := coordinatePost_comp_semEq j (dyadicPrefix i)
  (dyadicBranch i)
  have hchoi := KrausFamily.choi_eq_of_semEq hsem
  by_cases hji : j <= i
  * have hmem : j in dyadicPrefix i := hji
    simp only [coordinateSelected, hmem, reduceIte] at hchoi
    rw [hchoi, if_pos hji]
    change
      (KrausFamily.choi (dyadicBranch i)
        ((0, 0) : Fin 1 x Fin 1) ((0, 0) : Fin 1 x Fin 1)).re =
        dyadicWeight i
    exact dyadicBranch_choi_entry i
  * have hmem : j notin dyadicPrefix i := hji
    simp only [coordinateSelected, hmem, reduceIte] at hchoi
    rw [hchoi, if_neg hji]
    change
      (KrausFamily.choi (KrausFamily.zero : KrausFamily 1 1)
        ((0, 0) : Fin 1 x Fin 1) ((0, 0) : Fin 1 x Fin 1)).re = 0
    rw [show KrausFamily.choi
        (KrausFamily.zero : KrausFamily 1 1) = 0 by
        exact KrausFamily.choi_nil]
    rfl

theorem sum_dyadicCoordinate (m j : Nat) :
  (? i : Fin (m + 1),
    if j <= i then dyadicWeight i else 0) =
    if j <= m then
      (1 / 2 : ?) ^ j - (1 / 2 : ?) ^ (m + 1)
    else 0 := by
  induction m with
  | zero =>
    by_cases hj : j = 0
    * subst j
      simp [dyadicWeight]

```



```

    norm_num
    * have hj0 : not j <= 0 := by omega
    simp [hj0]
| succ m ih =>

```

Lean 4 source (lines 401–708)

```

rw [Fin.sum_univ_castSucc]
simp only [Fin.val_castSucc, Fin.val_last, ih]
by_cases hjm : j <= m
* have hjm' : j <= m + 1 := hjm.trans (Nat.le_succ m)
  simp only [hjm, hjm', reduceIte, dyadicWeight]
  rw [pow_succ (1 / 2 : ?) (m + 1)]
  ring
* by_cases hj : j = m + 1
  * subst j
    have hnot : not m + 1 <= m := by omega
    simp only [hnot, le_rfl, reduceIte, dyadicWeight]
    rw [pow_succ (1 / 2 : ?) (m + 1)]
    ring
  * have hnot' : not j <= m + 1 := by omega
    simp [hjm, hnot']

/-- The dyadic rational used as a strict coordinate threshold. -/
def dyadicThreshold (k : Nat) : NonnegRat :=
  <(1 / 2 : ?) ^ k, by positivity>

/-- A singleton result atom testing whether scalar Choi weight exceeds `2^-?`. -/
noncomputable def dyadicProbe (k : Nat) : TTObservationAtom 1 :=
  <RatStepPostCode.identity 1,
    (RatChoiVec.single (finProdFinEquiv ((0, 0) : Fin 1 x Fin 1)),
      dyadicThreshold k)>

theorem dyadicProbe_holds_stage_iff (m j k : Nat) :
  TTObservationAtom.Holds TTContinuation.resultCode (dyadicProbe k)
  ((dyadicStage m).bind (coordinateResult j)) <->
  (1 / 2 : ?) ^ k <
  ? i : Fin (m + 1),
  if j <= i then dyadicWeight i else 0 := by
have hsem :=
  (codedTestRepresentation coordinateCode (coordinatePost j)).wp_semEq
  (dyadicStage m)
have hchoi := KrausFamily.choi_eq_of_semEq hsem
have hchoi' :
  KrausFamily.choi
    (((dyadicStage m).bind (coordinateResult j)).wpKraus
      ((RatStepPostCode.identity 1).decode
        TTContinuation.resultCode)) =
    KrausFamily.choi
      ((dyadicStage m).wpKraus
        ((coordinatePost j).decode coordinateCode)) := by
  unfold coordinateResult
  simpa [codedTestRepresentation] using hchoi
change
  ((dyadicThreshold k).1 : ?) <
  ChoiTest.eval
    (RatChoiVec.single (finProdFinEquiv ((0, 0) : Fin 1 x Fin 1)),
      dyadicThreshold k)
  (KrausFamily.choi
    (((dyadicStage m).bind (coordinateResult j)).wpKraus
      ((RatStepPostCode.identity 1).decode
        TTContinuation.resultCode))) <-> _
rw [hchoi']
have heval :

```

```

    ChoiTest.eval
      (RatChoiVec.single (finProdFinEquiv ((0, 0) : Fin 1 x Fin 1)),
        dyadicThreshold k)
      (KrausFamily.choi
        ((dyadicStage m).wpKraus
          ((coordinatePost j).decode coordinateCode))) =
      (KrausFamily.choi
        ((dyadicStage m).wpKraus
          ((coordinatePost j).decode coordinateCode))
        ((0, 0) : Fin 1 x Fin 1) ((0, 0) : Fin 1 x Fin 1)).re := by
change
  ChoiTest.eval
    (RatChoiVec.single (finProdFinEquiv ((0, 0) : Fin 1 x Fin 1)),
      <0, le_rfl>)
    (KrausFamily.choi
      ((dyadicStage m).wpKraus
        ((coordinatePost j).decode coordinateCode))) = _
  exact ChoiTest.eval_single _ ((0, 0) : Fin 1 x Fin 1)
rw [heval, dyadicStage_coordinateChoi_entry]
norm_num [dyadicThreshold]

theorem dyadicProbe_holds_cross {j k : Nat} (hjk : j < k) :
  TTObservationAtom.Holds TTContinuation.resultCode (dyadicProbe k)
    ((dyadicStage k).bind (coordinateResult j)) := by
rw [dyadicProbe_holds_stage_iff, sum_dyadicCoordinate, if_pos hjk.le]
have hpow :
  (1 / 2 : ?) ^ k <= (1 / 2 : ?) ^ (j + 1) := by
  exact pow_le_pow_of_le_one (by norm_num) (by norm_num)
  (Nat.succ_le_iff.mpr hjk)
rw [pow_succ (1 / 2 : ?) j] at hpow
rw [pow_succ (1 / 2 : ?) k]
have hkpos : 0 < (1 / 2 : ?) ^ k := by positivity
nlinarith

theorem dyadicProbe_not_holds_diagonal (m k : Nat) :
  not TTObservationAtom.Holds TTContinuation.resultCode (dyadicProbe k)
    ((dyadicStage m).bind (coordinateResult k)) := by
rw [dyadicProbe_holds_stage_iff, sum_dyadicCoordinate]
by_cases hkm : k <= m
* simp only [hkm, reduceIte]
  have hpos : 0 < (1 / 2 : ?) ^ (m + 1) := by positivity
  linarith
* simp only [hkm, reduceIte]
  exact not_lt_of_ge (by positivity)

/-- The represented result continuation selecting coordinate `j`. -/
noncomputable def coordinateContinuation (j : Nat) :
  ScottMap (Set Nat) (TTContinuation.TTResult 1) :=
  codedPost coordinateCode (coordinatePost j)

theorem embed_dyadicStage_coordinate (m j : Nat) :
  embed (dyadicStage m) (coordinateContinuation j) =
    ((dyadicStage m).bind (coordinateResult j)).satisfiedTTTheory
      TTContinuation.resultCode := by
  apply embed_satisfied
  intro o
  exact codedPost_apply coordinateCode (coordinatePost j)
    ((dyadicStage m).value o)

theorem dyadicProbe_mem_cross {j k : Nat} (hjk : j < k) :
  [dyadicProbe k] in
    embed (dyadicStage k) (coordinateContinuation j) := by
  rw [embed_dyadicStage_coordinate,

```

```

    FiniteInstrumentComp.mem_satisfiedTTTheory]
intro a ha
have ha' : a = dyadicProbe k := List.mem_singleton.mp ha
subst a
exact dyadicProbe_holds_cross hjk

theorem dyadicProbe_not_mem_diagonal (m k : Nat) :
  [dyadicProbe k] notin
    embed (dyadicStage m) (coordinateContinuation k) := by
  rw [embed_dyadicStage_coordinate,
    FiniteInstrumentComp.mem_satisfiedTTTheory]
  intro h
  exact dyadicProbe_not_holds_diagonal m k
    (h (dyadicProbe k) (by simp))

/-- The directed supremum of the finite dyadic prefix embeddings. -/
noncomputable def dyadicLimit :
  TTContinuation.TTContinuationPower 1 (Set Nat) :=
  sSup (Set.range fun m => embed (dyadicStage m))

theorem dyadicProbe_mem_limit_cross {j k : Nat} (hjk : j < k) :
  [dyadicProbe k] in dyadicLimit (coordinateContinuation j) := by
  have hstage :
    embed (dyadicStage k) <= dyadicLimit := by
    exact le_sSup <k, rfl>
  exact hstage (coordinateContinuation j) (dyadicProbe_mem_cross hjk)

theorem dyadicProbe_not_mem_limit_diagonal (k : Nat) :
  [dyadicProbe k] notin dyadicLimit (coordinateContinuation k) := by
  intro h
  change [dyadicProbe k] in
    (sSup (Set.range fun m => embed (dyadicStage m)))
    (coordinateContinuation k) at h
  rw [ScottMap.sSup_apply, RoundedTheory.mem_sSup] at h
  obtain <T, <q, <m, rfl>, rfl>, hT> := h
  exact dyadicProbe_not_mem_diagonal m k hT

theorem exists_coordinate_collision
  (? : FiniteInstrumentComp 1 (Set Nat)) :
  exists j k, j < k /\
    forall o : ?.Outcome, (j in ?.value o <-> k in ?.value o) := by
  classical
  let selected : Nat -> Finset ?.Outcome :=
    fun j => Finset.univ.filter fun o => j in ?.value o
  have hnot : not Function.Injective selected := by
    intro hinj
    exact Set.infinite_range_of_injective hinj
      (Set.toFinite (Set.range selected))
  obtain <j, k, heq, hne> :=
    Function.not_injective_iff.mp hnot
  rcases lt_or_gt_of_ne hne with hjk | hkj
  * refine <j, k, hjk, ?_>
    intro o
    have hmem := Finset.ext_iff.mp heq o
    simp [selected] using hmem
  * refine <k, j, hkj, ?_>
    intro o
    have hmem := Finset.ext_iff.mp heq.symm o
    simp [selected] using hmem

/-- The directed dyadic limit is not represented by any finite instrument. -/
theorem dyadicLimit_not_mem_range :
  dyadicLimit notin

```

```

    Set.range (embed (n := 1) (D := Set Nat)) := by
rintro <?, h?>
obtain <j, k, hjk, hcollision> :=
  exists_coordinate_collision ?
have hbind :
  (?..bind (coordinateResult j)).satisfiedTTTheory
    TTContinuation.resultCode =
    (?..bind (coordinateResult k)).satisfiedTTTheory
      TTContinuation.resultCode := by
  apply TTTTokenTheory.bindPresented_eq_of_values
  intro o
  exact coordinateResult_eq_of_mem_iff (hcollision o)
have hembed :
  embed ? (coordinateContinuation j) =
  embed ? (coordinateContinuation k) := by
calc
  embed ? (coordinateContinuation j) =
    (?..bind (coordinateResult j)).satisfiedTTTheory
      TTContinuation.resultCode := by
  apply embed_satisfied
  intro o
  exact codedPost_apply coordinateCode (coordinatePost j) (?..value o)
_ = (?..bind (coordinateResult k)).satisfiedTTTheory
  TTContinuation.resultCode := hbind
_ = embed ? (coordinateContinuation k) := by
  symm
  apply embed_satisfied
  intro o
  exact codedPost_apply coordinateCode (coordinatePost k) (?..value o)
have hlimit :
  dyadicLimit (coordinateContinuation j) =
  dyadicLimit (coordinateContinuation k) := by
calc
  dyadicLimit (coordinateContinuation j) =
    embed ? (coordinateContinuation j) :=
    congrArg (fun q => q (coordinateContinuation j)) h?.symm
_ = embed ? (coordinateContinuation k) := hembed
_ = dyadicLimit (coordinateContinuation k) :=
  congrArg (fun q => q (coordinateContinuation k)) h?
have hmem := dyadicProbe_mem_limit_cross hjk
rw [hlimit] at hmem
exact dyadicProbe_not_mem_limit_diagonal k hmem

/-- The concrete finite-image range is directed but its supremum leaves the
finite physical image. -/
theorem range_embed_dyadicStage_directed_nonclosed :
  DirectedOn (* <= *) (Set.range fun m => embed (dyadicStage m)) /\
  sSup (Set.range fun m => embed (dyadicStage m)) notin
  Set.range (embed (n := 1) (D := Set Nat)) := by
  exact <directedOn_range_embed_dyadicStage, dyadicLimit_not_mem_range>

/-- Unconditional failure of a Scott retraction onto the finite physical
image, witnessed by the one-dimensional dyadic prefix chain. -/
theorem no_finiteImageScottRetraction_dyadic :
  FiniteImageScottRetraction 1 (Set Nat) -> False := by
  apply no_finiteImageScottRetraction_of_directedSup_not_finite
    (S := Set.range fun m => embed (dyadicStage m))
  * exact Set.range_nonempty _
  * exact directedOn_range_embed_dyadicStage
  * rintro q <m, rfl>
  exact <dyadicStage m, rfl>
  * exact dyadicLimit_not_mem_range

```

```

/-- Coordinate Choi observations of a finite instrument have finite range. -/
theorem finite_coordinateChoi_range
  (? : FiniteInstrumentComp n (Set Nat)) :
  (Set.range fun j => ?.testChoi (coordinateSet j)).Finite := by
  classical
  let selected : Nat -> Finset ?.Outcome :=
    fun j => Finset.univ.filter fun o => j in ?.value o
  let choiSum : Finset ?.Outcome ->
    Matrix (Fin n x Fin n) (Fin n x Fin n) ? :=
    fun s => ? o in s, KrausFamily.choi (?.branch o)
  have hfactor (j : Nat) :
    ?.testChoi (coordinateSet j) = choiSum (selected j) := by
    simp only [FiniteInstrumentComp.testChoi, coordinateSet, Set.mem_ofPred_eq,
      selected, choiSum, Finset.sum_filter]
  rfl
  apply Set.Finite.subset (Set.finite_range choiSum)
  rintro M <j, rfl>
  exact <selected j, (hfactor j).symm>

/-- An ambient coordinate observation which agrees with branch selection on
every finite physical embedding. -/
structure CoordinateObservation (n : Nat) where
  observe :
    TTContinuation.TTContinuationPower n (Set Nat) -> Nat ->
    Matrix (Fin n x Fin n) (Fin n x Fin n) ?
  observe_embed :
    forall (? : FiniteInstrumentComp n (Set Nat)) (j : Nat),
    observe (embed ?) j = ?.testChoi (coordinateSet j)

/-- Injectively many recovered coordinate matrices exclude finite
representability. -/
theorem not_mem_finiteImage_of_coordinate_injective
  (O : CoordinateObservation n)
  (q : TTContinuation.TTContinuationPower n (Set Nat))
  (hinj : Function.Injective (O.observe q)) :
  q notin Set.range (embed (n := n) (D := Set Nat)) := by
  rintro <?, rfl>
  have hfinite :
    (Set.range fun j => O.observe (embed ?) j).Finite := by
    simp only [O.observe_embed] using finite_coordinateChoi_range ?
  exact Set.infinite_range_of_injective hinj hfinite

/-- A directed family of finite embeddings with injective coordinate
observations at its supremum rules out a finite-image Scott retraction. -/
theorem no_finiteImageScottRetraction_of_coordinate_witness
  (O : CoordinateObservation n)
  (stage : Nat -> FiniteInstrumentComp n (Set Nat))
  (hdir : DirectedOn (* <= *) (Set.range fun k => embed (stage k)))
  (hinj : Function.Injective
    (O.observe (sSup (Set.range fun k => embed (stage k))))) :
  FiniteImageScottRetraction n (Set Nat) -> False := by
  apply no_finiteImageScottRetraction_of_directedSup_not_finite
  (S := Set.range fun k => embed (stage k))
  * exact Set.range_nonempty _
  * exact hdir
  * rintro q <k, rfl>
  exact <stage k, rfl>
  * exact not_mem_finiteImage_of_coordinate_injective O _ hinj

end TTPhysicalEmbedding

end QLambda

```

A.17 QLambda/HardwareAdequacy.lean

775 lines.

Lean 4 source (lines 1–400)

```
/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/
import QLambda.HardwareLogicalRelation
import QLambda.ScottFixApproximation

/-!
# Hardware adequacy

This file gives unconditional finite bridges from hardware executions to
physical TT observations. Individual symbolic histories yield genuine
one-outcome operations, while branch-complete evaluation trees combine all
nonzero probability and measurement alternatives into one finite instrument.
Terminal values are realized through `HardwareLogicalRelation.ValueRel`.

The normalized-tree theorem below is retained as a conditional legacy
interface. It is not inhabited for arbitrary normalized starts: a
zero-Born-weight branch need not be a globally zero channel. The sound
state-independent replacement is
`HardwareChannelSemantics.ChannelTreeCompleteness`, based on proof-only
subnormalized trees which retain every branch.
-/

open Matrix
open scoped ComplexOrder MatrixOrder

namespace QLambda
namespace HardwareAdequacy

open Scott1972.ContinuousLattice
open HardwareOperational
open HardwareObservation
open HardwareLogicalRelation
open TTPhysicalPrimitives
open TTPhysicalEmbedding
open TTContinuation

abbrev QubitQ := TTEnternalContinuationPower 2

variable (D_0 : QDomain.{0})
variable (j_0 : IsContinuousLatticeProjection D_0.carrier
  (QuantumFunctor (QModel QubitQ) D_0.carrier))

abbrev HValue := HSemanticValue D_0 j_0
abbrev HComp := HSemanticComp D_0 j_0

/-! ## Symbolic histories are physical operations -/

/-- A source probability in the unit interval is a physical operation. -/
noncomputable def sourceProbabilityOperation (p : ?)
  (hp_0 : 0 <= p) (hp_1 : p <= 1) : QuantumOperation 2 2 where
  kraus := QuantumAction.kraus (.sourceProbability p)
  trace_nonincreasing := by
    intro ? h?
    rw [QuantumAction.apply_sourceProbability p hp_0 ?, Matrix.trace_smul]
    have htr : 0 <= (Matrix.trace ?).re := by
```

```

    change 0 <= ? x : Fin 2, (? x x).re
    exact Finset.sum_nonneg fun x _ =>
      (Complex.nonneg_iff.mp h?.diag_nonneg).1
    change ((p : ?) * Matrix.trace ?).re <= (Matrix.trace ?).re
    rw [Complex.mul_re]
    simp only [Complex.ofReal_re, Complex.ofReal_im, zero_mul, sub_zero]
    nlinarith

/-- Either branch of the projective measurement is trace-nonincreasing. -/
def measurementOperation (b : Bool) : QuantumOperation 2 2 where
  kraus := measureBranch b
  trace_nonincreasing := by
    intro ? h?
    have hsum := Qubit.measureZComp.trace_nonincreasing ? h?
    change
      (? b : Bool,
        (Matrix.trace
          (KrausFamily.applyMat (Qubit.measureZComp.branch b) ?)).re) <=
        (Matrix.trace ?).re at hsum
    rw [Fintype.sum_bool] at hsum
    have hsum' :
      (Matrix.trace
        (KrausFamily.applyMat (Qubit.measureZComp.branch true) ?)).re +
      (Matrix.trace
        (KrausFamily.applyMat (Qubit.measureZComp.branch false) ?)).re <=
      (Matrix.trace ?).re := by
      exact hsum
    have hfalse : 0 <=
      (Matrix.trace
        (KrausFamily.applyMat (Qubit.measureZComp.branch false) ?)).re := by
      have hp := KrausFamily.applyMat_posSemidef
        (Qubit.measureZComp.branch false) h?
      change 0 <= ? x : Fin 2,
        ((KrausFamily.applyMat
          (Qubit.measureZComp.branch false) ?) x x).re
      exact Finset.sum_nonneg fun x _ =>
        (Complex.nonneg_iff.mp hp.diag_nonneg).1
    have htrue : 0 <=
      (Matrix.trace
        (KrausFamily.applyMat (Qubit.measureZComp.branch true) ?)).re := by
      have hp := KrausFamily.applyMat_posSemidef
        (Qubit.measureZComp.branch true) h?
      change 0 <= ? x : Fin 2,
        ((KrausFamily.applyMat
          (Qubit.measureZComp.branch true) ?) x x).re
      exact Finset.sum_nonneg fun x _ =>
        (Complex.nonneg_iff.mp hp.diag_nonneg).1
    cases b
    * change
      (Matrix.trace
        (KrausFamily.applyMat (Qubit.measureZComp.branch false) ?)).re <= _
      exact le_trans (le_add_of_nonneg_left htrue) hsum'
    * change
      (Matrix.trace
        (KrausFamily.applyMat (Qubit.measureZComp.branch true) ?)).re <= _
      exact le_trans (le_add_of_nonneg_right hfalse) hsum'

@[simp] theorem measurementOperation_kraus (b : Bool) :
  (measurementOperation b).kraus = QuantumAction.kraus (.measurement b) :=
  rfl

/-- The symbolic action of every labelled machine step is
trace-nonincreasing. This proposition-valued formulation is important:

```

```

`MachineStep` is proof data and cannot be eliminated into a runtime
`QuantumOperation`. -/
theorem machineStep_action_trace_nonincreasing {C : Type}
  {s t : Config C} {p : ?} {selectors : List Bool}
  {action : QuantumAction}
  (h : MachineStep s p selectors action t) :
  forall ? : Matrix (Fin 2) (Fin 2) ?, ?.PosSemidef ->
    (Matrix.trace (KrausFamily.applyMat action.kraus ?)).re <=
      (Matrix.trace ?).re := by
cases h with
| internal h =>
  cases h with
  | ?variable? => exact (QuantumOperation.identity 2).trace_nonincreasing
  | ?lambda? => exact (QuantumOperation.identity 2).trace_nonincreasing
  | recursive => exact (QuantumOperation.identity 2).trace_nonincreasing
  | application => exact (QuantumOperation.identity 2).trace_nonincreasing
  | evaluateArgument =>
    exact (QuantumOperation.identity 2).trace_nonincreasing
  | beta => exact (QuantumOperation.identity 2).trace_nonincreasing
  | recBeta => exact (QuantumOperation.identity 2).trace_nonincreasing
  | returnPrimitive =>
    exact (QuantumOperation.identity 2).trace_nonincreasing
  | pauliXPrimitive => exact Qubit.pauliXOp.trace_nonincreasing
  | internalLeft =>
    exact (QuantumOperation.identity 2).trace_nonincreasing
  | internalRight =>
    exact (QuantumOperation.identity 2).trace_nonincreasing
| probabilityLeft hp hp1 =>
  exact (sourceProbabilityOperation _ hp.le hp1).trace_nonincreasing
| probabilityRight hp hp1 =>
  exact (sourceProbabilityOperation _
    (sub_nonneg.mpr hp1.le) (by linarith)).trace_nonincreasing
| measurement hp =>
  exact (measurementOperation _).trace_nonincreasing
| external h =>
  cases h <|> exact (QuantumOperation.identity 2).trace_nonincreasing

/-- A valid trace's composed symbolic history is trace-nonincreasing. -/
theorem executionTrace_history_trace_nonincreasing {C : Type}
  {s t : Config C} {p : ?} {selectors : List Bool}
  {actions : List QuantumAction} {depth : Nat}
  (h : ExecutionTrace s t p selectors actions depth) :
  forall ? : Matrix (Fin 2) (Fin 2) ?, ?.PosSemidef ->
    (Matrix.trace
      (KrausFamily.applyMat (QuantumAction.composeHistory actions) ?)).re <=
      (Matrix.trace ?).re := by
induction h with
| refl => exact (QuantumOperation.identity 2).trace_nonincreasing
| cons head tail ih =>
  intro ? h?
  rw [QuantumAction.composeHistory_cons, KrausFamily.applyMat_comp]
  exact (ih _ (KrausFamily.applyMat_posSemidef _ h?)).trans
    (machineStep_action_trace_nonincreasing head ? h?)

/-- The physical operation intrinsic to a completed observation. -/
noncomputable def finiteObservationOperation {C : Type}
  {start : Config C} (o : FiniteObservation start) :
  QuantumOperation 2 2 where
  kraus := o.kraus
  trace_nonincreasing := executionTrace_history_trace_nonincreasing o.trace

@[simp] theorem finiteObservationOperation_kraus {C : Type}
  {start : Config C} (o : FiniteObservation start) :

```



```

    (finiteObservationOperation o).kraus = o.kraus :=
rfl

/-- Realize the terminal runtime value through the hardware logical relation
and attach it to the observation's physical operation. -/
noncomputable def observationInstrument {C : Type}
  {start : Config C} (o : FiniteObservation start)
  (d : HValue D_0 j_0)
  (_hvalue : ValueRel D_0 j_0 (fun _ => d) o.isTerminal.value d) :
  FiniteInstrumentComp 2 (HValue D_0 j_0) :=
  FiniteInstrumentComp.ofOperation (finiteObservationOperation o) d

/-- More generally, payload realization is supplied independently of the
terminal semantic value. -/
noncomputable def realizedObservationInstrument {C : Type}
  (realize : C -> HValue D_0 j_0)
  {start : Config C} (o : FiniteObservation start)
  (d : HValue D_0 j_0)
  (_hvalue : ValueRel D_0 j_0 realize o.isTerminal.value d) :
  FiniteInstrumentComp 2 (HValue D_0 j_0) :=
  FiniteInstrumentComp.ofOperation (finiteObservationOperation o) d

@[simp] theorem realizedObservationInstrument_branch {C : Type}
  (realize : C -> HValue D_0 j_0)
  {start : Config C} (o : FiniteObservation start)
  (d : HValue D_0 j_0)
  (hvalue : ValueRel D_0 j_0 realize o.isTerminal.value d)
  (u : (realizedObservationInstrument D_0 j_0 realize o d hvalue).Outcome) :
  (realizedObservationInstrument D_0 j_0 realize o d hvalue).branch u =
  o.kraus := by
change (finiteObservationOperation o).kraus = o.kraus
exact finiteObservationOperation_kraus o

@[simp] theorem realizedObservationInstrument_value {C : Type}
  (realize : C -> HValue D_0 j_0)
  {start : Config C} (o : FiniteObservation start)
  (d : HValue D_0 j_0)
  (hvalue : ValueRel D_0 j_0 realize o.isTerminal.value d)
  (u : (realizedObservationInstrument D_0 j_0 realize o d hvalue).Outcome) :
  (realizedObservationInstrument D_0 j_0 realize o d hvalue).value u = d :=
rfl

/-- Concrete-state consistency: the branch of the realized finite instrument
maps the initial normalized state to the accumulated weight times the terminal
normalized state. -/
theorem realizedObservationInstrument_state_consistent {C : Type}
  (realize : C -> HValue D_0 j_0)
  {start : Config C} (o : FiniteObservation start)
  (d : HValue D_0 j_0)
  (hvalue : ValueRel D_0 j_0 realize o.isTerminal.value d)
  (u : (realizedObservationInstrument D_0 j_0 realize o d hvalue).Outcome) :
  KrausFamily.applyMat
    ((realizedObservationInstrument D_0 j_0 realize o d hvalue).branch u)
    start.quantum.mat =
  (o.weight : ?) * o.terminal.quantum.mat := by
rw [realizedObservationInstrument_branch]
exact o.apply_kraus_eq_weight_smul

/-! ## TT token characterization -/

/-- Existing physical embedding adequacy applies directly to every realized
hardware observation. -/
theorem token_of_realizedObservation {C : Type}

```

```

    (realize : C -> HValue D_0 j_0)
  {start : Config C} (o : FiniteObservation start)
  (d : HValue D_0 j_0)
  (hvalue : ValueRel D_0 j_0 realize o.isTerminal.value d)
  (? : HValue D_0 j_0 -> FiniteInstrumentComp 2 PUnit.{1})
  (k : ScottMap (HValue D_0 j_0) (TTResult 2))
  (hk : QLambda.Adequacy.PresentedAt
    (realizedObservationInstrument D_0 j_0 realize o d hvalue) k ?)
  (i : Nat) (token : TTObservationToken 2) :
  token in
    (taggedEmbed
      (realizedObservationInstrument D_0 j_0 realize o d hvalue) i k) <->
      TTObservationToken.Holds resultCode token
      ((realizedObservationInstrument D_0 j_0 realize o d hvalue).bind ?) :=
      QLambda.Adequacy.token_of_taggedEmbed _ ? k hk i token

/-! ## External selector paths -/

/-- Apply a chronological path of external selectors without discarding the
unresolved tagged subtree which remains afterward. -/
noncomputable def selectPath {D : Type} [CompleteLattice D] :
  List Bool -> TTEExternalContinuationPower 2 D ->
  TTEExternalContinuationPower 2 D
| [], q => q
| b :: bs, q => selectPath bs (selectBranch b q)

@[simp] theorem selectPath_nil {D : Type} [CompleteLattice D]
  (q : TTEExternalContinuationPower 2 D) :
  selectPath [] q = q :=
  rfl

@[simp] theorem selectPath_cons {D : Type} [CompleteLattice D]
  (b : Bool) (bs : List Bool) (q : TTEExternalContinuationPower 2 D) :
  selectPath (b :: bs) q = selectPath bs (selectBranch b q) :=
  rfl

theorem selectPath_append {D : Type} [CompleteLattice D]
  (xs ys : List Bool) (q : TTEExternalContinuationPower 2 D) :
  selectPath (xs ++ ys) q = selectPath ys (selectPath xs q) := by
  induction xs generalizing q with
  | nil => rfl
  | cons b bs ih =>
    simp only [List.cons_append, selectPath_cons]
    exact ih (selectBranch b q)

/-- Heap coordinate of a selected child subtree. -/
def branchCoordinate (selector : Bool) (i : Nat) : Nat :=
  if selector then 2 * i + 2 else 2 * i + 1

/-- Decode the finite external-selector path stored in a heap coordinate.
Coordinate zero leaves the current external node unresolved. -/
def coordinatePath : Nat -> List Bool
| 0 => []
| i + 1 => (i % 2 != 0) :: coordinatePath (i / 2)
termination_by i => i
decreasing_by omega

@[simp] theorem coordinatePath_left (i : Nat) :
  coordinatePath (branchCoordinate false i) =
  false :: coordinatePath i := by
  simp [branchCoordinate, coordinatePath]

@[simp] theorem coordinatePath_right (i : Nat) :

```

```

    coordinatePath (branchCoordinate true i) =
      true :: coordinatePath i := by
rw [show branchCoordinate true i = (2 * i + 1) + 1 by
  simp [branchCoordinate]]
rw [coordinatePath]
rw [show (2 * i + 1) / 2 = i by omega]
simp

/-- Encode an explicit selector path above a remaining heap coordinate. -/
def encodePath : List Bool -> Nat -> Nat
| [], i => i
| selector :: selectors, i =>
  branchCoordinate selector (encodePath selectors i)

@[simp] theorem coordinatePath_encodePath
  (selectors : List Bool) (i : Nat) :
  coordinatePath (encodePath selectors i) =
    selectors ++ coordinatePath i := by
induction selectors with
| nil => rfl
| cons selector selectors ih =>
  cases selector <;>
  simp [encodePath, ih]

/-- Explicit `selectBranch` operations and the residual heap coordinate
encode one combined path in the original tagged computation. -/
theorem selectPath_apply_encode {D : Type} [CompleteLattice D]
  (selectors : List Bool) (q : TTEExternalContinuationPower 2 D)
  (i : Nat) :
  selectPath selectors q i = q (encodePath selectors i) := by
induction selectors generalizing q i with
| nil => rfl
| cons selector selectors ih =>
  rw [selectPath_cons, ih]
  cases selector <;> rfl

/-- Physical primitive/tree embeddings are coordinate-constant, so any
unused explicit selector suffix leaves them unchanged. -/
@[simp] theorem selectPath_taggedEmbed {D : Type} [CompleteLattice D]
  (selectors : List Bool) (? : FiniteInstrumentComp 2 D) :
  selectPath selectors (taggedEmbed ?) = taggedEmbed ? := by
induction selectors with
| nil => rfl
| cons selector selectors ih =>
  rw [selectPath_cons]
  have hbranch :
    selectBranch selector (taggedEmbed ?) = taggedEmbed ? := by
  funext i
  cases selector <;> rfl
  rw [hbranch, ih]

/-! ## Exact adequacy boundary -/

/-- A simultaneous realization of every terminal leaf of one completed
evaluation tree. -/
structure RealizedTree {C : Type} (realize : C -> HValue D_0 j_0)
{start : Config C}
  (tree : EvaluationTree C (KrausFamily.identity 2) start) where
value : TreeLeaf C -> HValue D_0 j_0
related : forall o, ValueRel D_0 j_0 realize
  (tree.instrument.value o).isTerminal.value
  (value (tree.instrument.value o))

```

```

/-- Map all terminal leaves of a branch-complete tree through their logical
relation realization. -/
noncomputable def realizedTreeInstrument {C : Type}
  (realize : C -> HValue D_0 j_0)
  {start : Config C}
  (tree : EvaluationTree C (KrausFamily.identity 2) start)
  (R : RealizedTree D_0 j_0 realize tree) :
  FiniteInstrumentComp 2 (HValue D_0 j_0) :=
  tree.instrument.map R.value

/-- Unconditional token characterization for a whole evaluation tree.
Crucially, probability and measurement branches have already been combined
inside `tree.instrument`. -/
theorem token_of_realizedTree {C : Type}
  (realize : C -> HValue D_0 j_0)
  {start : Config C}
  (tree : EvaluationTree C (KrausFamily.identity 2) start)
  (R : RealizedTree D_0 j_0 realize tree)
  (? : HValue D_0 j_0 -> FiniteInstrumentComp 2 PUnit.{1})
  (k : ScottMap (HValue D_0 j_0) (TTResult 2))
  (hk : QLambda.Adequacy.PresentedAt
    (realizedTreeInstrument D_0 j_0 realize tree R) k ?)
  (i : Nat) (token : TTObservationToken 2) :
  token in taggedEmbed
    (realizedTreeInstrument D_0 j_0 realize tree R) i k <->
    TTObservationToken.Holds resultCode token
    ((realizedTreeInstrument D_0 j_0 realize tree R).bind ?) :=

```

Lean 4 source (lines 401–775)

```

QLambda.Adequacy.token_of_taggedEmbed _ ? k hk i token

/-- One terminal outcome is compatible when the selectors it consumed form
a prefix of the explicit path followed by the residual coordinate path. -/
def TreeOutcomeCompatible {C : Type} {start : Config C}
  (tree : EvaluationTree C (KrausFamily.identity 2) start)
  (selectors : List Bool) (i : Nat)
  (o : tree.instrument.Outcome) : Prop :=
  List.IsPrefix (tree.instrument.value o).selectors
    (selectors ++ coordinatePath i)

/-- Restrict a realized tree instrument to exactly the terminal outcomes
compatible with the explicit selectors and residual heap coordinate. -/
noncomputable def restrictedRealizedTreeInstrument {C : Type}
  (realize : C -> HValue D_0 j_0) {start : Config C}
  (tree : EvaluationTree C (KrausFamily.identity 2) start)
  (R : RealizedTree D_0 j_0 realize tree)
  (selectors : List Bool) (i : Nat) :
  FiniteInstrumentComp 2 (HValue D_0 j_0) := by
  classical
  let ? := realizedTreeInstrument D_0 j_0 realize tree R
  let compatible : ?.Outcome -> Prop :=
    fun o => TreeOutcomeCompatible tree selectors i o
  letI : DecidablePred compatible := Classical.decPred compatible
  letI : Fintype (Subtype compatible) :=
    Fintype.subtype (Finset.univ.filter compatible)
    (fun o => by simp [compatible])
  exact
  { Outcome := Subtype compatible
    outcomeFintype := inferInstance
    branch := fun o => ?.branch o.1
    value := fun o => ?.value o.1
    trace_nonincreasing := by
      intro ? h?

```

```

let weight : ?.Outcome -> ? := fun o =>
  (Matrix.trace (KrausFamily.applyMat (?branch o))).re
have hsubset :
  (Finset.univ.filter compatible) subsesteq
  (Finset.univ : Finset ?.Outcome) :=
  Finset.filter_subset _ _
have hnonneg :
  forall o in (Finset.univ : Finset ?.Outcome),
    o notin Finset.univ.filter compatible -> 0 <= weight o := by
  intro o _ _
  have hp := KrausFamily.applyMat_posSemidef (?branch o) h?
  change 0 <= ? x, ((KrausFamily.applyMat (?branch o) ?) x x).re
  exact Finset.sum_nonneg fun x _ =>
    (Complex.nonneg_iff.mp hp.diag_nonneg).1
have hle :
  ? o in Finset.univ.filter compatible, weight o <=
  ? o : ?.Outcome, weight o := by
  apply Finset.sum_le_sum_of_subset_of_nonneg hsubset hnonneg
rw [Finset.sum_subtype (p := compatible)
  (Finset.univ.filter compatible)
  (fun o => by simp) weight] at hle
change (? o : Subtype compatible, weight o.1) <=
  (Matrix.trace ?).re
exact hle.trans (?trace_nonincreasing ? h?) }

/-- Token characterization after coordinate/path restriction. -/
theorem token_of_restrictedRealizedTree {C : Type}
  (realize : C -> HValue D_0 j_0) {start : Config C}
  (tree : EvaluationTree C (KrausFamily.identity 2) start)
  (R : RealizedTree D_0 j_0 realize tree)
  (selectors : List Bool) (i : Nat)
  (? : HValue D_0 j_0 -> FiniteInstrumentComp 2 PUnit.{1})
  (k : ScottMap (HValue D_0 j_0) (TTResult 2))
  (hk : QLambda.Adequacy.PresentedAt
    (restrictedRealizedTreeInstrument D_0 j_0 realize tree R selectors i)
    k ?)
  (token : TTObservationToken 2) :
  token in embed
    (restrictedRealizedTreeInstrument D_0 j_0 realize tree R selectors i)
    k <->
  TTObservationToken.Holds resultCode token
    ((restrictedRealizedTreeInstrument D_0 j_0 realize tree R selectors i).bind
    ?) :=
  QLambda.Adequacy.token_of_embed _ ? k hk token

/-! ## Unconditional soundness interface

`ConfigRel` deliberately relates only the classical CEK control and stack.
Consequently it cannot by itself remember the accumulated Kraus prefix of a
tree node. The following invariant states exactly the additional, one-sided
fact needed for operational soundness. It is pointwise order, not equality,
and makes no completeness or finite-generation assertion. -/

/-- One realized branch-complete tree is sound for a denotation when every
coordinate/path restriction of its physically aggregated instrument lies
below the correspondingly selected denotation. Probability and measurement
remain aggregated inside `tree.instrument`; this invariant never replaces
them by a lattice join of separate branches. -/
structure EvaluationTreePointwiseSound {C : Type}
  (realize : C -> HValue D_0 j_0) {start : Config C}
  (denotation : HComp D_0 j_0)
  (tree : EvaluationTree C (KrausFamily.identity 2) start)
  (R : RealizedTree D_0 j_0 realize tree) : Prop where

```

```

restricted_le_selected :
  forall selectors i k,
    embed
      (restrictedRealizedTreeInstrument D_0 j_0 realize tree R selectors i)
      k <=
        selectPath selectors denotation i k

/-- Exact pointwise embedding consequence of the one-sided tree invariant.
The initial `ConfigRel` premise records that `denotation` is the computation
represented by the starting CEK state; no completeness hypothesis is used. -/
theorem realizedTree_restricted_le_selected_of_pointwiseSound {C : Type}
  (realize : C -> HValue D_0 j_0) {start : Config C}
  (denotation : HComp D_0 j_0)
  (_hstart : ConfigRel D_0 j_0 realize start denotation)
  (tree : EvaluationTree C (KrausFamily.identity 2) start)
  (R : RealizedTree D_0 j_0 realize tree)
  (hsound : EvaluationTreePointwiseSound D_0 j_0 realize denotation tree R)
  (selectors : List Bool) (i : Nat)
  (k : ScottMap (HValue D_0 j_0) (TTResult 2)) :
  embed
    (restrictedRealizedTreeInstrument D_0 j_0 realize tree R selectors i)
    k <=
      selectPath selectors denotation i k :=
hsound.restricted_le_selected selectors i k

/-- Minimum token-level soundness, with no finite-presentation assumption:
every TT token produced by the restricted, physically aggregated tree occurs
in the selected denotation at the same coordinate and continuation. -/
theorem token_mem_selected_of_pointwiseSound {C : Type}
  (realize : C -> HValue D_0 j_0) {start : Config C}
  (denotation : HComp D_0 j_0)
  (hstart : ConfigRel D_0 j_0 realize start denotation)
  (tree : EvaluationTree C (KrausFamily.identity 2) start)
  (R : RealizedTree D_0 j_0 realize tree)
  (hsound : EvaluationTreePointwiseSound D_0 j_0 realize denotation tree R)
  (selectors : List Bool) (i : Nat)
  (k : ScottMap (HValue D_0 j_0) (TTResult 2))
  (token : TTObservationToken 2)
  (htoken : token in embed
    (restrictedRealizedTreeInstrument D_0 j_0 realize tree R selectors i) k) :
  token in selectPath selectors denotation i k :=
realizedTree_restricted_le_selected_of_pointwiseSound D_0 j_0 realize
  denotation hstart tree R hsound selectors i k htoken

/-- Global one-sided operational soundness. Unlike
`TreeOperationalCompleteness`, this asks only for inclusion of each finite
tree result and says nothing about whether finite trees generate the whole
selected denotation. -/
structure TreeOperationalSoundness {C : Type}
  (realize : C -> HValue D_0 j_0) (start : Config C)
  (denotation : HComp D_0 j_0) : Prop where
  tree_pointwise :
    forall (tree : EvaluationTree C (KrausFamily.identity 2) start)
      (R : RealizedTree D_0 j_0 realize tree),
      EvaluationTreePointwiseSound D_0 j_0 realize denotation tree R

/-- A terminal primitive tree consumes no selector and is compatible with
every explicit path and residual coordinate. -/
theorem terminalTree_pathCompatible {C : Type} {s : Config C}
  (h : Terminal s) (selectors : List Bool) (i : Nat) :
  forall o, TreeOutcomeCompatible
    (EvaluationTree.terminal
      (? := KrausFamily.identity 2) h) selectors i o := by

```

```

intro o
exact List.nil_prefix

/-- One external selector is supplied exactly by its child heap coordinate. -/
theorem oneExternal_coordinate_prefix (selector : Bool) :
  List.IsPrefix [selector]
    ([[] ++ coordinatePath (branchCoordinate selector 0)) := by
  cases selector <;> simp

/-- One external selector may instead be supplied explicitly while coordinate
zero leaves the child unresolved. -/
theorem oneExternal_explicit_prefix (selector : Bool) :
  List.IsPrefix [selector] ([selector] ++ coordinatePath 0) :=
  by simp [coordinatePath]

/-- Mixed probabilistic/external sanity check at unresolved coordinate zero:
a terminal outcome consuming no selector is retained, while a sibling outcome
which still needs external `false` is filtered out rather than causing the
whole probabilistic instrument to be rejected. -/
theorem mixed_terminal_external_root_filter :
  List.IsPrefix [] ([[] ++ coordinatePath 0) /\
    not List.IsPrefix [false] ([[] ++ coordinatePath 0) := by
  simp [coordinatePath]

/-- Whole-tree result observations available at one fuel stage for the exact
explicit-selector/residual-coordinate pair. -/
def treeResultsAtFuel {C : Type}
  (realize : C -> HValue D_0 j_0) (start : Config C)
  (selectors : List Bool) (i : Nat)
  (k : ScottMap (HValue D_0 j_0) (TTResult 2))
  (fuel : Nat) : Set (TTResult 2) :=
  {T | exists (tree : EvaluationTree C (KrausFamily.identity 2) start)
    (R : RealizedTree D_0 j_0 realize tree),
    tree.depth <= fuel /\
    T = embed
    (restrictedRealizedTreeInstrument D_0 j_0 realize tree R selectors i) k}

theorem treeResultsAtFuel_mono {C : Type}
  (realize : C -> HValue D_0 j_0) (start : Config C)
  (selectors : List Bool) (i : Nat)
  (k : ScottMap (HValue D_0 j_0) (TTResult 2))
  {fuel fuel' : Nat} (h : fuel <= fuel') :
  treeResultsAtFuel D_0 j_0 realize start selectors i k fuel subseq
    treeResultsAtFuel D_0 j_0 realize start selectors i k fuel' := by
  rintro T <tree, R, hdepth, rfl>
  exact <tree, R, hdepth.trans h, rfl>

/-- Exhaustive set of finite whole-tree results, explicitly presented
as the union of fuel stages. -/
def finiteTreeResults {C : Type}
  (realize : C -> HValue D_0 j_0) (start : Config C)
  (selectors : List Bool) (i : Nat)
  (k : ScottMap (HValue D_0 j_0) (TTResult 2)) :
  Set (TTResult 2) :=
  {T | exists fuel, T in
    treeResultsAtFuel D_0 j_0 realize start selectors i k fuel}

/-- Every result represented at a finite fuel stage is below the selected
denotation. This is the order-theoretic soundness half, independent of the
reverse (operational completeness) inclusion. -/
theorem treeResultsAtFuel_le_selected_of_soundness {C : Type}
  (realize : C -> HValue D_0 j_0) (start : Config C)
  (denotation : HComp D_0 j_0)

```

```

    (_hstart : ConfigRel D_0 j_0 realize start denotation)
    (hsound : TreeOperationalSoundness D_0 j_0 realize start denotation)
    (selectors : List Bool) (i : Nat)
    (k : ScottMap (HValue D_0 j_0) (TResult 2))
    (fuel : Nat) :
    forall T in treeResultsAtFuel D_0 j_0 realize start selectors i k fuel,
      T <= selectPath selectors denotation i k := by
intro T hT
rcases hT with <tree, R, _hdepth, rfl>
exact (hsound.tree_pointwise tree R).restricted_le_selected selectors i k

/-- The same soundness statement for the exhaustive union of finite fuel
stages. -/
theorem finiteTreeResults_le_selected_of_soundness {C : Type}
  (realize : C -> HValue D_0 j_0) (start : Config C)
  (denotation : HComp D_0 j_0)
  (hstart : ConfigRel D_0 j_0 realize start denotation)
  (hsound : TreeOperationalSoundness D_0 j_0 realize start denotation)
  (selectors : List Bool) (i : Nat)
  (k : ScottMap (HValue D_0 j_0) (TResult 2)) :
  forall T in finiteTreeResults D_0 j_0 realize start selectors i k,
    T <= selectPath selectors denotation i k := by
rintro T <fuel, hT>
exact treeResultsAtFuel_le_selected_of_soundness D_0 j_0 realize start
  denotation hstart hsound selectors i k fuel T hT

/-- Legacy normalized-tree completeness interface. It states that after
fixing both the explicit selector path and residual heap coordinate, each
result continuation is the nondeterministic supremum of compatible,
branch-complete finite evaluation trees. This premise is generally
uninhabited for the positive-only normalized trees; use
`HardwareChannelSemantics.ChannelTreeCompleteness` for new results. -/
structure TreeOperationalCompleteness {C : Type}
  (realize : C -> HValue D_0 j_0) (start : Config C)
  (denotation : HComp D_0 j_0) : Prop where
  selected_result_eq_tree_sup :
  forall selectors i k,
    selectPath selectors denotation i k =
      sSup (finiteTreeResults D_0 j_0 realize start selectors i k)

/-- Equality-based operational completeness entails the one-sided soundness
invariant. The converse is not used or claimed. -/
theorem TreeOperationalCompleteness.toSoundness {C : Type}
  {realize : C -> HValue D_0 j_0} {start : Config C}
  {denotation : HComp D_0 j_0}
  (hcomplete :
    TreeOperationalCompleteness D_0 j_0 realize start denotation) :
  TreeOperationalSoundness D_0 j_0 realize start denotation := by
constructor
intro tree R
constructor
intro selectors i k
rw [hcomplete.selected_result_eq_tree_sup selectors i k]
apply le_sSup
exact <tree.depth, tree, R, le_rfl, rfl>

/-- Closed-term token adequacy conditional only on the branch-complete
CEK/tree fundamental lemma (besides the standard finite presentation of the
chosen result continuation). -/
theorem closed_term_tree_token_adequacy_iff {C : Type}
  (realize : C -> HValue D_0 j_0)
  (start : Config C)
  (denotation : HComp D_0 j_0)

```



```

(hcomplete : TreeOperationalCompleteness D_0 j_0 realize start denotation)
(selectors : List Bool)
(? : HValue D_0 j_0 -> FiniteInstrumentComp 2 PUnit.{1})
(k : ScottMap (HValue D_0 j_0) (TTResult 2))
(hk : forall d, k d = (? d).satisfiedTTTheory resultCode)
(i : Nat) (token : TTObservationToken 2) :
token in selectPath selectors denotation i k <->
  exists fuel, exists
    (tree : EvaluationTree C (KrausFamily.identity 2) start)
    (R : RealizedTree D_0 j_0 realize tree),
    tree.depth <= fuel /\
    TTObservationToken.Holds resultCode token
    ((restrictedRealizedTreeInstrument D_0 j_0 realize tree R selectors i).bind
     ?) := by
rw [hcomplete.selected_result_eq_tree_sup selectors i k,
    RoundedTheory.mem_sSup]
constructor
* rintro <_, <fuel, hq>, ht>
  rcases hq with <tree, R, hdepth, rfl>
  refine <fuel, tree, R, hdepth, ?_>
  exact (token_of_restrictedRealizedTree D_0 j_0 realize tree R selectors i
    ? k (fun o => hk _) token).1 ht
* rintro <fuel, tree, R, hdepth, ht>
  refine <embed
    (restrictedRealizedTreeInstrument D_0 j_0 realize tree R selectors i)
    k, ?_, ?_>
  * exact <fuel, tree, R, hdepth, rfl>
  * exact (token_of_restrictedRealizedTree D_0 j_0 realize tree R selectors i
    ? k (fun o => hk _) token).2 ht

/-- The hardware adequacy statement specialized to an initial closed-program
configuration and its compositional interpreter denotation. The sole
remaining semantic premise is the branch-complete CEK fundamental lemma. -/
theorem initialConfig_tree_token_adequacy_iff {C : Type}
  (realize : C -> HValue D_0 j_0)
  (code : Term (QubitPrimitive C))
  (quantum : NormalizedDensity 2)
  (semanticEnv : Env (HValue D_0 j_0))
  (hcomplete : TreeOperationalCompleteness D_0 j_0 realize
    (initialConfig code quantum)
    (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv))
  (selectors : List Bool)
  (? : HValue D_0 j_0 -> FiniteInstrumentComp 2 PUnit.{1})
  (k : ScottMap (HValue D_0 j_0) (TTResult 2))
  (hk : forall d, k d = (? d).satisfiedTTTheory resultCode)
  (i : Nat) (token : TTObservationToken 2) :
token in selectPath selectors
  (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv) i k <->
  exists fuel, exists
    (tree : EvaluationTree C (KrausFamily.identity 2)
      (initialConfig code quantum))
    (R : RealizedTree D_0 j_0 realize tree),
    tree.depth <= fuel /\
    TTObservationToken.Holds resultCode token
    ((restrictedRealizedTreeInstrument D_0 j_0 realize tree R selectors i).bind
     ?) :=
closed_term_tree_token_adequacy_iff D_0 j_0 realize
  (initialConfig code quantum)
  (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv)
  hcomplete selectors ? k hk i token

/-! ## Recursive finite approximations -/

```

```

/-- Recursive values are the supremum of their finite unfoldings from bottom. -/
theorem recLambdaValue_eq_iSup_finite
  (self arg : Name)
  (body : ScottMap (Env (HValue D_0 j_0)) (HComp D_0 j_0))
  (? : Env (HValue D_0 j_0)) :
  recLambdaValue (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
    self arg body ? =
    bigcup fuel, ScottFixApproximation.iterateBot
      (recFunctional (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
        self arg body ?) fuel := by
    exact ScottFixApproximation.fix_eq_iSup_iterateBot _

/-- Every finite recursive unfolding lies below the recursive value. -/
theorem finite_rec_unfolding_le
  (self arg : Name)
  (body : ScottMap (Env (HValue D_0 j_0)) (HComp D_0 j_0))
  (? : Env (HValue D_0 j_0)) (fuel : Nat) :
  ScottFixApproximation.iterateBot
    (recFunctional (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
      self arg body ?) fuel <=
  recLambdaValue (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
    self arg body ? := by
  exact ScottFixApproximation.iterateBot_le_fix _ fuel

end HardwareAdequacy
end QLambda

```

A.18 QLambda/HardwareChannel/Closed.lean

231 lines.

Lean 4 source

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/
import QLambda.HardwareChannel.FunApp

/-!
# Closed Produces / FunAppFrag wrappers and token adequacy

Layer of the hardware channel-tree semantics. All layers share the
`QLambda.HardwareChannelSemantics` namespace; import
`QLambda.HardwareChannelSemantics` for the full module.

`Produces 0` now includes applications whose residual arguments are in
`FunAppFrag` (not only administrative NoApp), so closed stacked apps
such as `app (lam x body) (app (lam y M) N)` are covered by
`closed_produces_*` whenever the pieces inhabit FunAppFrag / Produces.
`FunAppFrag.app_recLam` covers nested recursive-lambda applications,
including under mixed ordinary/recursive function-frame spines.

The path-indexed fundamental theorem and the closed-term theorems that
take a branch-complete `PathChannelEvaluation` live in
`QLambda.HardwareChannel.Fundamental` (re-exported by the barrel).
Application-free closed terms need no evaluation derivation:
`closed_term_presented_channelTreeCompleteness_of_noApp`.
-/

set_option maxHeartbeats 800000

```

```

namespace QLambda
namespace HardwareChannelSemantics

open Matrix
open scoped ComplexOrder MatrixOrder

open HardwareOperational
open HardwareObservation
open HardwareAdequacy
open HardwareLogicalRelation
open TTPhysicalPrimitives
open TTPhysicalEmbedding
open TTContinuation
open Scott1972.ContinuousLattice

theorem closed_produces_presented_channelTreeCompleteness
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEnternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (code : Term (QubitPrimitive C))
  (hclosed : Closed code) (hprod : Produces 0 code)
  (quantum : NormalizedDensity 2)
  (semanticEnv : Env (HSemanticValue D_0 j_0)) :
  PresentedChannelTreeCompleteness D_0 j_0 realize
    (initialChannelConfig code quantum)
    (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv) :=
  (produces_under_argument_frames_presentedChannelConfigCompleteness
    D_0 j_0 realize hprod [] rfl (by intro q hq; cases hq) rfl rfl
    (initialChannelConfig_wellScoped hclosed quantum)
    (initialChannelConfig_related D_0 j_0 realize code quantum
      semanticEnv)).complete

theorem closed_produces_presented_token_adequacy
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEnternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (code : Term (QubitPrimitive C))
  (hclosed : Closed code) (hprod : Produces 0 code)
  (quantum : NormalizedDensity 2)
  (semanticEnv : Env (HSemanticValue D_0 j_0))
  (selectors : List Bool)
  (? : HSemanticValue D_0 j_0 -> FiniteInstrumentComp 2 PUnit.{1})
  (k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2))
  (hk : forall d, k d = (? d).satisfiedTTTheory resultCode)
  (i : Nat) (token : TTObservationToken 2) :
  token in HardwareAdequacy.selectPath selectors
    (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv)
    i k <->
  exists fuel, exists (tree : ChannelTree C
    (initialChannelConfig code quantum))
    (R : ChannelTreeRealization D_0 j_0 realize tree),
    tree.depth <= fuel /\
    ResultAvailable tree selectors i /\
    TTObservationToken.Holds resultCode token
    ((restrictedInstrument D_0 j_0 realize tree R selectors i).bind
      ?) :=
  presented_channel_tree_token_adequacy_iff D_0 j_0 realize
    (initialChannelConfig code quantum)
    (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv)

```

```

(closed_produces_presented_channelTreeCompleteness D_0 j_0 realize
  code hclosed hprod quantum semanticEnv)
selectors ? k hk i token

/-- Closed `app (lam x body) (app (lam y M) N)` when body and the
nested application are FunAppFrag. -/
theorem closed_produces_lam_funApp_arg_presented_channelTreeCompleteness
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (x y : Name) (body M N : Term (QubitPrimitive C))
  (hclosed : Closed (.app (.lam x body) (.app (.lam y M) N)))
  (hbody : FunAppFrag body)
  (harg : FunAppFrag (.app (.lam y M) N))
  (quantum : NormalizedDensity 2)
  (semanticEnv : Env (HSemanticValue D_0 j_0)) :
  PresentedChannelTreeCompleteness D_0 j_0 realize
    (initialChannelConfig (.app (.lam x body) (.app (.lam y M) N))
      quantum)
    (interp (hardwarePrimitive D_0 j_0 realize)
      (.app (.lam x body) (.app (.lam y M) N)) semanticEnv) :=
closed_produces_presented_channelTreeCompleteness D_0 j_0 realize
  (.app (.lam x body) (.app (.lam y M) N)) hclosed
  (Produces.app (Produces.lam (Produces.frag hbody)) harg)
  quantum semanticEnv

theorem closed_produces_lam_funApp_arg_presented_token_adequacy
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (x y : Name) (body M N : Term (QubitPrimitive C))
  (hclosed : Closed (.app (.lam x body) (.app (.lam y M) N)))
  (hbody : FunAppFrag body)
  (harg : FunAppFrag (.app (.lam y M) N))
  (quantum : NormalizedDensity 2)
  (semanticEnv : Env (HSemanticValue D_0 j_0))
  (selectors : List Bool)
  (? : HSemanticValue D_0 j_0 -> FiniteInstrumentComp 2 PUnit.{1})
  (k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2))
  (hk : forall d, k d = (? d).satisfiedTTTheory resultCode)
  (i : Nat) (token : TTObservationToken 2) :
  token in HardwareAdequacy.selectPath selectors
    (interp (hardwarePrimitive D_0 j_0 realize)
      (.app (.lam x body) (.app (.lam y M) N)) semanticEnv)
    i k <->
  exists fuel, exists (tree : ChannelTree C
    (initialChannelConfig
      (.app (.lam x body) (.app (.lam y M) N)) quantum))
    (R : ChannelTreeRealization D_0 j_0 realize tree),
  tree.depth <= fuel /\
  ResultAvailable tree selectors i /\
  TTObservationToken.Holds resultCode token
    ((restrictedInstrument D_0 j_0 realize tree R selectors i).bind
      ?) :=
closed_produces_presented_token_adequacy D_0 j_0 realize
  (.app (.lam x body) (.app (.lam y M) N)) hclosed
  (Produces.app (Produces.lam (Produces.frag hbody)) harg)
  quantum semanticEnv selectors ? k hk i token

```

```

/-- Closed body-and-argument nested `app (lam x body) arg` fragment. -/
theorem closed_funAppFrag_presented_channelTreeCompleteness
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (code : Term (QubitPrimitive C))
  (hclosed : Closed code) (hfrag : FunAppFrag code)
  (quantum : NormalizedDensity 2)
  (semanticEnv : Env (HSemanticValue D_0 j_0)) :
  PresentedChannelTreeCompleteness D_0 j_0 realize
    (initialChannelConfig code quantum)
    (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv) :=
  (funAppFrag_empty_presentedChannelConfigCompleteness D_0 j_0 realize
    hfrag rfl rfl (initialChannelConfig_wellScoped hclosed quantum)
    (initialChannelConfig_related D_0 j_0 realize code quantum
      semanticEnv)).complete

/-- Closed nested `app (recLam ...) arg` as a FunAppFrag fragment. -/
theorem closed_funAppFrag_app_recLam_presented_channelTreeCompleteness
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (self x : Name) (body arg : Term (QubitPrimitive C))
  (hclosed : Closed (.app (.recLam self x body) arg))
  (hbody : FunAppFrag body) (harg : FunAppFrag arg)
  (quantum : NormalizedDensity 2)
  (semanticEnv : Env (HSemanticValue D_0 j_0)) :
  PresentedChannelTreeCompleteness D_0 j_0 realize
    (initialChannelConfig (.app (.recLam self x body) arg) quantum)
    (interp (hardwarePrimitive D_0 j_0 realize)
      (.app (.recLam self x body) arg) semanticEnv) :=
  closed_funAppFrag_presented_channelTreeCompleteness D_0 j_0 realize
    (.app (.recLam self x body) arg) hclosed
    (FunAppFrag.app_recLam hbody harg) quantum semanticEnv

theorem closed_funAppFrag_presented_token_adequacy
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (code : Term (QubitPrimitive C))
  (hclosed : Closed code) (hfrag : FunAppFrag code)
  (quantum : NormalizedDensity 2)
  (semanticEnv : Env (HSemanticValue D_0 j_0))
  (selectors : List Bool)
  (? : HSemanticValue D_0 j_0 -> FiniteInstrumentComp 2 PUnit.{1})
  (k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2))
  (hk : forall d, k d = (? d).satisfiedTTTheory resultCode)
  (i : Nat) (token : TTObservationToken 2) :
  token in HardwareAdequacy.selectPath selectors
    (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv)
    i k <->
  exists fuel, exists (tree : ChannelTree C
    (initialChannelConfig code quantum))
    (R : ChannelTreeRealization D_0 j_0 realize tree),
  tree.depth <= fuel /\
  ResultAvailable tree selectors i /\
  TTObservationToken.Holds resultCode token

```

```

      ((restrictedInstrument D_0 j_0 realize tree R selectors i).bind
       ?) :=
presented_channel_tree_token_adequacy_iff D_0 j_0 realize
  (initialChannelConfig code quantum)
  (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv)
  (closed_funAppFrag_presented_channelTreeCompleteness D_0 j_0 realize
   code hclosed hfrag quantum semanticEnv)
  selectors ? k hk i token

end HardwareChannelSemantics
end QLambda

```

A.19 QLambda/HardwareChannel/Config.lean

7313 lines.

Lean 4 source (lines 1–400)

```

/-
Copyright (c) 2026  Lars Warren Ericson.  All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/
import QLambda.HardwareAdequacy

/-!
# Channel configurations, trees, and logical relations

Layer of the hardware channel-tree semantics.  All layers share the
`QLambda.HardwareChannelSemantics` namespace; import
`QLambda.HardwareChannelSemantics` for the full module.
-/

set_option maxHeartbeats 800000

namespace QLambda
namespace HardwareChannelSemantics

open Matrix
open scoped ComplexOrder MatrixOrder

open HardwareOperational
open HardwareObservation
open HardwareAdequacy
open HardwareLogicalRelation
open TTPhysicalPrimitives
open TTPhysicalEmbedding
open TTContinuation
open Scott1972.ContinuousLattice

/-- A proof configuration has exactly the executable CEK data, but carries a
possibly-zero subnormalized state. -/
@[ext]
structure ChannelConfig (C : Type) where
  control : Control C
  env : RuntimeEnv C
  stack : EvalStack C
  quantum : SubNormalizedDensity 2

/-- The proof-state version of the closed-program CEK invariant. -/
def ChannelConfig.WellScoped {C : Type} (s : ChannelConfig C) : Prop :=
  Control.WellScoped s.env s.control /\ EvalStack.WellScoped s.stack

```

```

/-- The classical CEK relation is unchanged by the proof-only quantum state.
It is intentionally independent of the subnormalized matrix; physical effects
are tracked exactly by `ChannelTree.state_exact`. -/
def ChannelConfigRel {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (s : ChannelConfig C) (answer : HSemanticComp D_0 j_0) : Prop :=
exists current k,
  ControlRel D_0 j_0 realize s.control s.env current /\
  StackRel D_0 j_0 realize s.stack k /\
  answer = k current

/-- Observation-indexed relation used by the stacked fundamental theorem.
Unlike `ChannelConfigRel`, it remembers the parent coordinate saved by each
pending frame and relates one final TT observation directly. -/
def PathChannelConfigRel {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (s : ChannelConfig C)
  (active : Nat)
  (observedStack : ObservedStack C)
  (finalK : ScottMap (HSemanticValue D_0 j_0) (TTResult 2))
  (result : TTResult 2) : Prop :=
observedStack.erase = s.stack /\
exists current currentK,
  ControlRel D_0 j_0 realize s.control s.env current /\
  PathStackRel D_0 j_0 realize finalK observedStack currentK /\
  result = current active currentK

/-- Forget only the normalization proof of an executable configuration. -/
def ofConfig {C : Type} (s : Config C) : ChannelConfig C where
  control := s.control
  env := s.env
  stack := s.stack
  quantum :=
    { mat := s.quantum.mat
      posSemidef := s.quantum.posSemidef
      trace_le_one := by rw [s.quantum.trace_eq_one]; norm_num }

theorem ofConfig_wellScoped {C : Type} {s : Config C}
  (h : Config.WellScoped s) :
  ChannelConfig.WellScoped (ofConfig s) :=
h

@[simp] theorem ofConfig_control {C : Type} (s : Config C) :
  (ofConfig s).control = s.control := rfl

@[simp] theorem ofConfig_quantum_mat {C : Type} (s : Config C) :
  (ofConfig s).quantum.mat = s.quantum.mat := rfl

/-- Apply a trace-nonincreasing operation without normalizing its output. -/
noncomputable def applyOperation (? : QuantumOperation 2 2)
  (? : SubNormalizedDensity 2) : SubNormalizedDensity 2 where
  mat := KrausFamily.applyMat ?.kraus ?.mat
  posSemidef := KrausFamily.applyMat_posSemidef ?.kraus ?.posSemidef
  trace_le_one := (? .trace_nonincreasing ?.mat ?.posSemidef).trans
  ?.trace_le_one

```

```

@[simp] theorem applyOperation_mat (? : QuantumOperation 2 2)
  (? : SubNormalizedDensity 2) :
  (applyOperation ? ?).mat = KrausFamily.applyMat ?.kraus ?.mat := rfl

@[simp] theorem applyOperation_identity (? : SubNormalizedDensity 2) :
  applyOperation (QuantumOperation.identity 2) ? = ? := by
  apply SubNormalizedDensity.ext
  exact KrausFamily.applyMat_identity ?.mat

@[simp] theorem applyOperation_sourceProbability_one
  (? : SubNormalizedDensity 2) :
  applyOperation
    (sourceProbabilityOperation 1 zero_le_one (le_refl 1)) ? = ? := by
  apply SubNormalizedDensity.ext
  rw [applyOperation_mat]
  change KrausFamily.applyMat
  (QuantumAction.kraus (.sourceProbability 1)) ?.mat = ?.mat
  rw [QuantumAction.apply_sourceProbability 1 zero_le_one ?.mat]
  simp

/-- Every operation sends the zero proof-state to zero. -/
theorem applyOperation_bot (? : QuantumOperation 2 2) :
  applyOperation ? (False : SubNormalizedDensity 2) = False := by
  apply SubNormalizedDensity.ext
  simp [applyOperation, SubNormalizedDensity.mat_bot, KrausFamily.applyMat]

/-- Administrative CEK reduction in the proof semantics. Pauli-X is the only
constructor here that changes the proof-state. -/
inductive ChannelInternalStep {C : Type} :
  ChannelConfig C -> ChannelConfig C -> Prop where
| variable {s : ChannelConfig C} {x : Name} {v : RuntimeValue C}
  (h : RuntimeEnv.lookup x s.env = some v) :
  ChannelInternalStep {s with control := .term (.var x)}
  {s with control := .value v}
| lambda {s : ChannelConfig C} {x : Name}
  {body : Term (QubitPrimitive C)} :
  ChannelInternalStep {s with control := .term (.lam x body)}
  {s with control := .value (.closure x body s.env)}
| recursive {s : ChannelConfig C} {self arg : Name}
  {body : Term (QubitPrimitive C)} :
  ChannelInternalStep {s with control := .term (.recLam self arg body)}
  {s with control := .value (.recClosure self arg body s.env)}
| application {s : ChannelConfig C}
  {fn arg : Term (QubitPrimitive C)} :
  ChannelInternalStep {s with control := .term (.app fn arg)}
  { s with
    control := .term fn
    stack := .argument arg s.env :: s.stack}
| evaluateArgument {s : ChannelConfig C} {fn : RuntimeValue C}
  {arg : Term (QubitPrimitive C)} {callEnv : RuntimeEnv C}
  {rest : EvalStack C} :
  ChannelInternalStep
  { s with
    control := .value fn
    stack := .argument arg callEnv :: rest}
  { s with
    control := .term arg
    env := callEnv
    stack := .function fn :: rest}
| beta {s : ChannelConfig C} {x : Name}
  {body : Term (QubitPrimitive C)} {closureEnv : RuntimeEnv C}
  {arg : RuntimeValue C} {rest : EvalStack C} :
  ChannelInternalStep

```



```

    { s with
      control := .value arg
      stack := .function (.closure x body closureEnv) :: rest}
    { s with
      control := .term body
      env := RuntimeEnv.bind x arg closureEnv
      stack := rest}
| recBeta {s : ChannelConfig C} {self x : Name}
  {body : Term (QubitPrimitive C)} {closureEnv : RuntimeEnv C}
  {arg : RuntimeValue C} {rest : EvalStack C} :
  ChannelInternalStep
    { s with
      control := .value arg
      stack := .function (.recClosure self x body closureEnv) :: rest}
    { s with
      control := .term body
      env := RuntimeEnv.bind x arg
      (RuntimeEnv.bind self
        (.recClosure self x body closureEnv) closureEnv)
      stack := rest}
| returnPrimitive {s : ChannelConfig C} {value : C} :
  ChannelInternalStep {s with control := .term (.prim (.ret value))}
  {s with control := .value (.payload value)}
| pauliXPrimitive {s : ChannelConfig C} {value : C} :
  ChannelInternalStep {s with control := .term (.prim (.pauliX value))}
  { s with
    control := .value (.payload value)
    quantum := applyOperation Qubit.pauliXOp s.quantum}
| internalLeft {s : ChannelConfig C}
  {left right : Term (QubitPrimitive C)} :
  ChannelInternalStep {s with control := .term (.intern left right)}
  {s with control := .term left}
| internalRight {s : ChannelConfig C}
  {left right : Term (QubitPrimitive C)} :
  ChannelInternalStep {s with control := .term (.intern left right)}
  {s with control := .term right}

/-- Physical action is read from executable control rather than eliminated
from proof data. -/
noncomputable def channelInternalOperation {C : Type}
  (s : ChannelConfig C) : QuantumOperation 2 2 :=
  match s.control with
  | .term (.prim (.pauliX _)) => Qubit.pauliXOp
  | _ => QuantumOperation.identity 2

/-- Internal proof steps evolve their subnormalized state by their declared
operation. -/
theorem internal_quantum_exact {C : Type} {s t : ChannelConfig C}
  (h : ChannelInternalStep s t) :
  t.quantum = applyOperation (channelInternalOperation s) s.quantum := by
  cases h <;> simp [channelInternalOperation]

/-- Proof-semantic administrative steps preserve the same lexical scoping
invariant as executable CEK steps. -/
theorem ChannelInternalStep.preserve_wellScoped {C : Type}
  {s t : ChannelConfig C} (hstep : ChannelInternalStep s t)
  (hscoped : ChannelConfig.WellScoped s) :
  ChannelConfig.WellScoped t := by
  cases hstep with
  | @?variable? base x value hlookup =>
    rcases hscoped with <<henv, _>, hstack>
    exact <<henv, henv x value hlookup>, hstack>
  | @lambda base x body =>

```

```

    rcases hscoped with <<henv, hcover>, hstack>
    exact <<henv, .closure x body base.env henv hcover>, hstack>
| @recursive base self arg body =>
    rcases hscoped with <<henv, hcover>, hstack>
    exact <<henv, .recClosure self arg body base.env henv hcover>, hstack>
| @application base fn arg =>
    rcases hscoped with <<henv, hcover>, hstack>
    refine <<henv, ?_>, ?_>
    * intro x hx
      exact hcover x (by simp [free, hx])
    * intro frame hframe
      simp only [List.mem_cons] at hframe
      rcases hframe with rfl | hframe
      * refine <henv, ?_>
        intro x hx
        exact hcover x (by simp [free, hx])
      * exact hstack frame hframe
| @evaluateArgument base fn arg callEnv rest =>
    rcases hscoped with <<_henv, hfn>, hstack>
    have hargFrame :
      Frame.WellScoped (.argument arg callEnv) :=
        hstack _ (by simp)
    rcases hargFrame with <hcallEnv, harg>
    refine <<hcallEnv, harg>, ?_>
    intro frame hframe
    simp only [List.mem_cons] at hframe
    rcases hframe with rfl | hframe
    * exact hfn
    * exact hstack frame (by simp [hframe])
| @beta base x body closureEnv arg rest =>
    rcases hscoped with <<_henv, harg>, hstack>
    have hclosureFrame :=
      hstack (.function (.closure x body closureEnv)) (by simp)
    change RuntimeValue.WellScoped (.closure x body closureEnv) at hclosureFrame
    cases hclosureFrame with
    | closure _ _ _ hclosureEnv hfree =>
      have hclosureEnv' : RuntimeEnv.WellScoped closureEnv :=
        hclosureEnv
      refine <<RuntimeEnv.WellScoped.bind hclosureEnv' harg, ?_>, ?_>
      * intro y hy
        by_cases hyx : y = x
      * subst y
        exact <arg, by simp [RuntimeEnv.bind, RuntimeEnv.lookup]>
      * obtain <value, hvalue> :=
        hfree y (by simp [free, hy, hyx])
        exact <value, by
          simp [RuntimeEnv.bind, RuntimeEnv.lookup, hyx, hvalue]>
      * intro frame hframe
        exact hstack frame (by simp [hframe])
| @recBeta base self x body closureEnv arg rest =>
    rcases hscoped with <<_henv, harg>, hstack>
    have hrecFrame :=
      hstack (.function (.recClosure self x body closureEnv)) (by simp)
    change RuntimeValue.WellScoped
      (.recClosure self x body closureEnv) at hrecFrame
    cases hrecFrame with
    | recClosure _ _ _ _ hclosureEnv hfree =>
      have hclosureEnv' : RuntimeEnv.WellScoped closureEnv :=
        hclosureEnv
      have hself :
        RuntimeEnv.WellScoped
          (RuntimeEnv.bind self
            (.recClosure self x body closureEnv) closureEnv) :=

```

```

    RuntimeEnv.WellScoped.bind hclosureEnv'
      (.recClosure self x body closureEnv hclosureEnv hfree)
  refine <<RuntimeEnv.WellScoped.bind hself harg, ?_>, ?_>
* intro y hy
  by_cases hyx : y = x
* subst y
  exact <arg, by simp [RuntimeEnv.bind, RuntimeEnv.lookup]>
* by_cases hyself : y = self
* subst y
  exact <.recClosure self x body closureEnv, by
    simp [RuntimeEnv.bind, RuntimeEnv.lookup, hyx]>
* obtain <value, hvalue> :=
  hfree y (by simp [free, hy, hyself, hyx])
  exact <value, by
    simp [RuntimeEnv.bind, RuntimeEnv.lookup, hyx, hyself,
      hvalue]>
* intro frame hframe
  exact hstack frame (by simp [hframe])
| @returnPrimitive base value =>
  rcases hscoped with <<henv, _>, hstack>
  exact <<henv, .payload value>, hstack>
| @pauliXPrimitive base value =>
  rcases hscoped with <<henv, _>, hstack>
  exact <<henv, .payload value>, hstack>
| @internalLeft base left right =>
  rcases hscoped with <<henv, hcover>, hstack>
  exact <<henv, fun x hx => hcover x (by simp [free, hx])>, hstack>
| @internalRight base left right =>
  rcases hscoped with <<henv, hcover>, hstack>
  exact <<henv, fun x hx => hcover x (by simp [free, hx])>, hstack>

/-- Total external selection. -/
inductive ChannelExternalStep {C : Type} :
  ChannelConfig C -> Bool -> ChannelConfig C -> Prop where
| selectFalse {s : ChannelConfig C}
  {left right : Term (QubitPrimitive C)} :
  ChannelExternalStep {s with control := .term (.extern left right)}
  false {s with control := .term left}
| selectTrue {s : ChannelConfig C}
  {left right : Term (QubitPrimitive C)} :
  ChannelExternalStep {s with control := .term (.extern left right)}
  true {s with control := .term right}

theorem ChannelExternalStep.preserve_wellScoped {C : Type}
  {s t : ChannelConfig C} {selector : Bool}
  (hstep : ChannelExternalStep s selector t)
  (hscoped : ChannelConfig.WellScoped s) :
  ChannelConfig.WellScoped t := by
cases hstep with
| @selectFalse base left right =>
  rcases hscoped with <<henv, hcover>, hstack>
  exact <<henv, fun x hx => hcover x (by simp [free, hx])>, hstack>
| @selectTrue base left right =>
  rcases hscoped with <<henv, hcover>, hstack>
  exact <<henv, fun x hx => hcover x (by simp [free, hx])>, hstack>

/-- A terminal proof configuration. -/
structure ChannelTerminal {C : Type} (s : ChannelConfig C) where
  value : RuntimeValue C
  control_eq : s.control = .value value
  stack_eq : s.stack = []

/-- A related terminal proof configuration returns an exactly related value,
```

```

just as in the normalized machine. -/
theorem terminal_related {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  {realize : C → HSemanticValue D_0 j_0}
  {s : ChannelConfig C} (hterminal : ChannelTerminal s)
  {answer : HSemanticComp D_0 j_0}
  (hrel : ChannelConfigRel D_0 j_0 realize s answer) :
  exists d : HSemanticValue D_0 j_0,
    ValueRel D_0 j_0 realize hterminal.value d /\
    answer = semanticUnit (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0) d := by
  rcases hrel with <current, k, hcontrol, hstack, rfl>
  rw [hterminal.control_eq] at hcontrol
  rw [hterminal.stack_eq] at hstack
  cases hcontrol with
  | value _ d _ hvalue =>
    cases hstack
    exact <d, hvalue, rfl>

/-- One leaf of a channel tree, including consumed external selectors. -/
structure ChannelLeaf (C : Type) where
  terminal : ChannelConfig C
  isTerminal : ChannelTerminal terminal
  selectors : List Bool
  physicalPath : List Bool

def prependSelector {C : Type} (b : Bool) (leaf : ChannelLeaf C) :
  ChannelLeaf C :=
  { leaf with selectors := b :: leaf.selectors }

def prependPhysical {C : Type} (b : Bool) (leaf : ChannelLeaf C) :
  ChannelLeaf C :=
  { leaf with physicalPath := b :: leaf.physicalPath }

/-- Branch-complete proof evaluation. Probability and measurement always
have two children. In particular, neither constructor asks whether its
current concrete branch has positive trace. -/
inductive ChannelTree (C : Type) : ChannelConfig C → Type where
  | terminal {s : ChannelConfig C} (h : ChannelTerminal s) : ChannelTree C s

```

Lean 4 source (lines 401–800)

```

  | internal {s t : ChannelConfig C} (h : ChannelInternalStep s t)
    (next : ChannelTree C t) : ChannelTree C s
  | external {s t : ChannelConfig C} (selector : Bool)
    (h : ChannelExternalStep s selector t)
    (next : ChannelTree C t) : ChannelTree C s
  | probability {s : ChannelConfig C} {p : ?}
    {left right : Term (QubitPrimitive C)}
    (hp_0 : 0 < p) (hp_1 : p < 1)
    (leftTree : ChannelTree C
      { s with
        control := .term left
        quantum := applyOperation
          (sourceProbabilityOperation p hp_0.le hp_1.le) s.quantum })
    (rightTree : ChannelTree C
      { s with
        control := .term right
        quantum := applyOperation
          (sourceProbabilityOperation (1 - p)
            (sub_nonneg.mpr hp_1.le) (by linarith)) s.quantum }) :
    ChannelTree C {s with control := .prob p left right}

```

```

| probabilityZero {s : ChannelConfig C}
  {left right : Term (QubitPrimitive C)}
  (rightTree : ChannelTree C
    { s with
      control := .term right
      quantum := applyOperation
        (sourceProbabilityOperation 1 zero_le_one (le_refl 1))
        s.quantum}) :
  ChannelTree C {s with control := .term (.prob 0 left right)}}
| probabilityOne {s : ChannelConfig C}
  {left right : Term (QubitPrimitive C)}
  (leftTree : ChannelTree C
    { s with
      control := .term left
      quantum := applyOperation
        (sourceProbabilityOperation 1 zero_le_one (le_refl 1))
        s.quantum}) :
  ChannelTree C {s with control := .term (.prob 1 left right)}}
| measurement {s : ChannelConfig C} {zeroValue oneValue : C}
  (zeroTree : ChannelTree C
    { s with
      control := .value (.payload zeroValue)
      quantum := applyOperation (measurementOperation false) s.quantum})
  (oneTree : ChannelTree C
    { s with
      control := .value (.payload oneValue)
      quantum := applyOperation (measurementOperation true) s.quantum}) :
  ChannelTree C
    {s with control := .term (.prim (.measureZ zeroValue oneValue))}}

namespace ChannelTree

/-- Exact height, used as proof-evaluation fuel. -/
noncomputable def depth {C : Type} {s : ChannelConfig C} :
  ChannelTree C s -> Nat
| .terminal _ => 0
| .internal _ next => next.depth + 1
| .external _ _ next => next.depth + 1
| .probability _ _ left right => max left.depth right.depth + 1
| .probabilityZero right => right.depth + 1
| .probabilityOne left => left.depth + 1
| .measurement zero one => max zero.depth one.depth + 1

/-- Fold every branch of a channel tree into one finite physical instrument. -/
noncomputable def instrument {C : Type} {s : ChannelConfig C} :
  ChannelTree C s -> FiniteInstrumentComp 2 (ChannelLeaf C)
| .terminal h => FiniteInstrumentComp.unit <s, h, [], []>
| .internal _h next =>
  (FiniteInstrumentComp.ofOperation (channelInternalOperation s) ()).bind
    (fun _ => next.instrument)
| .external selector _h next =>
  next.instrument.map (prependSelector selector)
| .probability hp_0 hp_1 left right =>
  (probabilityInstrument _ hp_0.le hp_1.le).bind
    (fun b => (if b then right.instrument else left.instrument).map
      (prependPhysical b))
| .probabilityZero right =>
  right.instrument.map (prependPhysical true)
| .probabilityOne left =>
  left.instrument.map (prependPhysical false)
| .measurement zero one =>
  Qubit.measureZComp.bind
    (fun b => if b then one.instrument else zero.instrument)

```

```

/-- Every terminal value in a finite tree from a well-scoped source is itself
well scoped. This is the reachability fact used to make arbitrary leaf
realizations canonical. -/
theorem terminalValues_wellScoped {C : Type} {s : ChannelConfig C}
  (tree : ChannelTree C s) (hscoped : ChannelConfig.WellScoped s) :
  forall o : tree.instrument.Outcome,
    RuntimeValue.WellScoped (tree.instrument.value o).isTerminal.value := by
induction tree with
| terminal h =>
  intro o
  rcases hscoped with <hcontrol, _>
  rw [h.control_eq] at hcontrol
  exact hcontrol.2
| internal h next ih =>
  rintro <u, o>
  exact ih (h.preserve_wellScoped hscoped) o
| external selector h next ih =>
  intro o
  exact ih (h.preserve_wellScoped hscoped) o
| @probability source p leftTerm rightTerm hp_0 hp_1 left right ihLeft ihRight =>
  rintro <b, o>
  change Bool at b
  rcases hscoped with <<henv, hcover>, hstack>
  cases b
  * apply ihLeft
    exact <<henv, fun x hx => hcover x (by simp [free, hx])>, hstack>
  * apply ihRight
    exact <<henv, fun x hx => hcover x (by simp [free, hx])>, hstack>
| @probabilityZero source leftTerm rightTerm right ihRight =>
  intro o
  rcases hscoped with <<henv, hcover>, hstack>
  apply ihRight
  exact <<henv, fun x hx => hcover x (by simp [free, hx])>, hstack>
| @probabilityOne source leftTerm rightTerm left ihLeft =>
  intro o
  rcases hscoped with <<henv, hcover>, hstack>
  apply ihLeft
  exact <<henv, fun x hx => hcover x (by simp [free, hx])>, hstack>
| @measurement source zeroValue oneValue zero one ihZero ihOne =>
  rintro <b, o>
  change Bool at b
  rcases hscoped with <<henv, _hcover>, hstack>
  cases b
  * apply ihZero
    exact <<henv, .payload zeroValue>, hstack>
  * apply ihOne
    exact <<henv, .payload oneValue>, hstack>

/- Every folded branch sends the root proof-state exactly to its leaf
proof-state. There is no scalar restoration because branch states remain
subnormalized throughout. -/
set_option maxHeartbeats 2000000 in
theorem state_exact {C : Type} {s : ChannelConfig C}
  (tree : ChannelTree C s) :
  forall o : tree.instrument.Outcome,
    KrausFamily.applyMat (tree.instrument.branch o) s.quantum.mat =
      (tree.instrument.value o).terminal.quantum.mat := by
induction tree with
| terminal h =>
  intro o
  change KrausFamily.applyMat (KrausFamily.identity 2) _ = _
  exact KrausFamily.applyMat_identity _

```

```

| @internal source target h next ih =>
  rintro <u, o>
  change
    KrausFamily.applyMat
      (KrausFamily.comp (next.instrument.branch o)
        (channelInternalOperation source).kraus)
      source.quantum.mat =
        (next.instrument.value o).terminal.quantum.mat
  rw [KrausFamily.applyMat_comp]
  rw [ <- applyOperation_mat, <- internal_quantum_exact h]
  exact ih o
| external selector h next ih =>
  intro o
  cases h
  * change
    KrausFamily.applyMat (next.instrument.branch o) _ =
      (prependSelector false
        (next.instrument.value o)).terminal.quantum.mat
  exact ih o
  * change
    KrausFamily.applyMat (next.instrument.branch o) _ =
      (prependSelector true
        (next.instrument.value o)).terminal.quantum.mat
  exact ih o
| @probability source p leftTerm rightTerm hp_0 hp_1 left right
  ihLeft ihRight =>
  rintro <b, o>
  change Bool at b
  change
    KrausFamily.applyMat
      (KrausFamily.comp
        ((if b = true then right.instrument else left.instrument).branch o)
        (QuantumAction.kraus
          (.sourceProbability (if b = true then 1 - p else p))))
      source.quantum.mat =
        ((if b = true then right.instrument else left.instrument).value o).terminal.quantum.mat
  rw [KrausFamily.applyMat_comp]
  cases b
  * change
    KrausFamily.applyMat (left.instrument.branch o)
      (KrausFamily.applyMat
        (sourceProbabilityOperation _ hp_0.le hp_1.le).kraus
        source.quantum.mat) =
      (left.instrument.value o).terminal.quantum.mat
  rw [ <- applyOperation_mat]
  exact ihLeft o
  * change
    KrausFamily.applyMat (right.instrument.branch o)
      (KrausFamily.applyMat
        (sourceProbabilityOperation (1 - p)
          (sub_nonneg.mpr hp_1.le) (by linarith)).kraus
        source.quantum.mat) =
      (right.instrument.value o).terminal.quantum.mat
  rw [ <- applyOperation_mat]
  exact ihRight o
| @probabilityZero source leftTerm rightTerm right ihRight =>
  intro o
  change right.instrument.Outcome at o
  change
    KrausFamily.applyMat (right.instrument.branch o) source.quantum.mat =
      (right.instrument.value o).terminal.quantum.mat
  have hm :
    (applyOperation

```

```

        (sourceProbabilityOperation 1 zero_le_one (le_refl 1))
        source.quantum).mat = source.quantum.mat :=
    congrArg SubNormalizedDensity.mat
    (applyOperation_sourceProbability_one source.quantum)
rw [ <- hm]
exact ihRight o
| @probabilityOne source leftTerm rightTerm left ihLeft =>
    intro o
    change left.instrument.Outcome at o
    change
        KrausFamily.applyMat (left.instrument.branch o) source.quantum.mat =
            (left.instrument.value o).terminal.quantum.mat
    have hm :
        (applyOperation
            (sourceProbabilityOperation 1 zero_le_one (le_refl 1))
            source.quantum).mat = source.quantum.mat :=
        congrArg SubNormalizedDensity.mat
        (applyOperation_sourceProbability_one source.quantum)
    rw [ <- hm]
    exact ihLeft o
| @measurement source zeroValue oneValue zero one ihZero ihOne =>
    rintro <b, o>
    change Bool at b
    change
        KrausFamily.applyMat
            (KrausFamily.comp
                ((if b = true then one.instrument else zero.instrument).branch o)
                (if b = true then [Qubit.proj1] else [Qubit.proj0]))
            source.quantum.mat =
            ((if b = true then one.instrument else zero.instrument).value o).terminal.quantum.mat
    rw [KrausFamily.applyMat_comp]
    cases b
    * change
        KrausFamily.applyMat (zero.instrument.branch o)
            (KrausFamily.applyMat (measurementOperation false).kraus
                source.quantum.mat) =
            (zero.instrument.value o).terminal.quantum.mat
    rw [ <- applyOperation_mat]
    exact ihZero o
    * change
        KrausFamily.applyMat (one.instrument.branch o)
            (KrausFamily.applyMat (measurementOperation true).kraus
                source.quantum.mat) =
            (one.instrument.value o).terminal.quantum.mat
    rw [ <- applyOperation_mat]
    exact ihOne o

/-- Fuel-indexed branch-complete channel trees. -/
def atFuel {C : Type} (start : ChannelConfig C) (fuel : Nat) :
    Set (ChannelTree C start) :=
    {tree | tree.depth <= fuel}

theorem atFuel_mono {C : Type} {start : ChannelConfig C}
    {fuel fuel' : Nat} (h : fuel <= fuel') :
    atFuel start fuel subseteq atFuel start fuel' :=
    fun _ ht => ht.trans h

theorem instrument_outcome_nonempty {C : Type} {s : ChannelConfig C}
    (tree : ChannelTree C s) : Nonempty tree.instrument.Outcome := by
    induction tree with
    | terminal _ =>
        exact <<>>
    | internal _ next ih =>

```



```

    exact <<<>, Classical.choice ih>>
| external _ _ next ih =>
    exact ih
| probability _ _ left right ihLeft ihRight =>
    exact <<false, Classical.choice ihLeft>>
| probabilityZero right ihRight =>
    exact ihRight
| probabilityOne left ihLeft =>
    exact ihLeft
| measurement zero one ihZero ihOne =>
    exact <<false, Classical.choice ihZero>>

end ChannelTree

/#!/ ## Correspondence with the executable normalized machine -/

/-- A positive proof-level measurement branch normalizes to exactly the
existing executable measurement transition. -/
theorem positive_measurement_correspondence {C : Type}
  (s : Config C) (zeroValue oneValue : C) (b : Bool)
  (hpositive : 0 < measureProbability s b) :
  exists t : Config C,
    HardwareOperational.WeightedStep
      ({s with control := .term (.prim (.measureZ zeroValue oneValue))} :
      Config C)
      (measureProbability s b) t /\
      (applyOperation (measurementOperation b) (ofConfig s).quantum).mat =
      (measureProbability s b : ?) * t.quantum.mat := by
let t : Config C :=
  {s with
    control := .value (.payload (if b then oneValue else zeroValue))
    quantum := measuredState s b hpositive}
  refine <t, .measurement hpositive, ?_>
  exact QuantumAction.apply_measurement s b hpositive

/-- Positive source-probability branches are exactly the executable weighted
steps, while the same formula remains meaningful at weight zero in the proof
semantics. -/
theorem positive_probability_left_correspondence {C : Type}
  (s : Config C) (p : ?) (left right : Term (QubitPrimitive C))
  (hp : 0 < p) (hp_1 : p <= 1) :
  exists t : Config C,
    HardwareOperational.WeightedStep
      ({s with control := .term (.prob p left right)} : Config C)
      p t /\
      (applyOperation (sourceProbabilityOperation p hp.le hp_1)
      (ofConfig s).quantum).mat = (p : ?) * t.quantum.mat := by
  refine <{s with control := .term left}, .probabilityLeft hp hp_1, ?_>
  exact QuantumAction.apply_sourceProbability p hp.le s.quantum.mat

theorem positive_probability_right_correspondence {C : Type}
  (s : Config C) (p : ?) (left right : Term (QubitPrimitive C))
  (hp_0 : 0 <= p) (hp_1 : p < 1) :
  exists t : Config C,
    HardwareOperational.WeightedStep
      ({s with control := .term (.prob p left right)} : Config C)
      (1 - p) t /\
      (applyOperation
      (sourceProbabilityOperation (1 - p)
      (sub_nonneg.mpr hp_1.le) (by linarith))
      (ofConfig s).quantum).mat =
      ((1 - p : ?) : ?) * t.quantum.mat := by
  refine <{s with control := .term right}, .probabilityRight hp_0 hp_1, ?_>

```

```

exact QuantumAction.apply_sourceProbability (1 - p)
(sub_nonneg.mpr hp_1.le) s.quantum.mat

/--! ## Coordinate restriction and TT observations -/

/-- A semantic value assignment for channel leaves. Kept separate so the
physical channel tree itself is independent of the denotational model. -/
structure ChannelTreeRealization {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {start : ChannelConfig C} (tree : ChannelTree C start) where
value : ChannelLeaf C -> HSemanticValue D_0 j_0
related : forall o, ValueRel D_0 j_0 realize
  (tree.instrument.value o).isTerminal.value
  (value (tree.instrument.value o))

/-- A well-scoped terminal value makes every admissible leaf realization
canonical, even though `ChannelTreeRealization` itself remains unrestricted. -/
theorem ChannelTreeRealization.value_eq_of_wellScoped {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  {realize : C -> HSemanticValue D_0 j_0}
  {start : ChannelConfig C} {tree : ChannelTree C start}
  (R : ChannelTreeRealization D_0 j_0 realize tree)
  (o : tree.instrument.Outcome)
  (hscoped : RuntimeValue.WellScoped
    (tree.instrument.value o).isTerminal.value)
  {d : HSemanticValue D_0 j_0}
  (hd : ValueRel D_0 j_0 realize
    (tree.instrument.value o).isTerminal.value d) :
  R.value (tree.instrument.value o) = d :=
valueRel_functional D_0 j_0 realize hscoped (R.related o) hd

noncomputable def realizedInstrument {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {start : ChannelConfig C} (tree : ChannelTree C start)
  (R : ChannelTreeRealization D_0 j_0 realize tree) :
  FiniteInstrumentComp 2 (HSemanticValue D_0 j_0) :=
tree.instrument.map R.value

def OutcomeCompatible {C : Type} {start : ChannelConfig C}
  (tree : ChannelTree C start) (selectors : List Bool) (i : Nat)
  (o : tree.instrument.Outcome) : Prop :=
List.IsPrefix (tree.instrument.value o).selectors
  (selectors ++ HardwareAdequacy.coordinatePath i)

/-- Availability of a complete semantic observation at one combined external
path. Interior physical choices require both children; exact endpoints require
only the nonzero child. -/
def resultAvailableAt {C : Type} {start : ChannelConfig C} :
  (tree : ChannelTree C start) -> List Bool -> Prop
| .terminal _, _ => True
| .internal _ next, path => resultAvailableAt next path
| .external b _ next, path =>
  exists rest, path = b :: rest /\ resultAvailableAt next rest
| .probability _ _ left right, path =>
  resultAvailableAt left path /\ resultAvailableAt right path

```

```

| .probabilityZero right, path => resultAvailableAt right path
| .probabilityOne left, path => resultAvailableAt left path

```

Lean 4 source (lines 801–1200)

```

| .measurement zero one, path =>
  resultAvailableAt zero path /\ resultAvailableAt one path

def ResultAvailable {C : Type} {start : ChannelConfig C}
  (tree : ChannelTree C start) (selectors : List Bool) (i : Nat) : Prop :=
  resultAvailableAt tree (selectors ++ HardwareAdequacy.coordinatePath i)

/-- Explicit selectors and the residual coordinate determine exactly the
same compatible leaves as their single encoded coordinate. -/
theorem outcomeCompatible_encodePath {C : Type}
  {start : ChannelConfig C} (tree : ChannelTree C start)
  (selectors : List Bool) (i : Nat) (o : tree.instrument.Outcome) :
  OutcomeCompatible tree selectors i o <=>
  OutcomeCompatible tree [] (HardwareAdequacy.encodePath selectors i) o := by
  simp [OutcomeCompatible, HardwareAdequacy.coordinatePath_encodePath]

/-- Result availability depends only on the combined encoded path. -/
theorem resultAvailable_encodePath {C : Type}
  {start : ChannelConfig C} (tree : ChannelTree C start)
  (selectors : List Bool) (i : Nat) :
  ResultAvailable tree selectors i <=>
  ResultAvailable tree [] (HardwareAdequacy.encodePath selectors i) := by
  simp [ResultAvailable, HardwareAdequacy.coordinatePath_encodePath]

noncomputable def restrictedInstrument {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {start : ChannelConfig C} (tree : ChannelTree C start)
  (R : ChannelTreeRealization D_0 j_0 realize tree)
  (selectors : List Bool) (i : Nat) :
  FiniteInstrumentComp 2 (HSemanticValue D_0 j_0) := by
  classical
  let ? := realizedInstrument D_0 j_0 realize tree R
  let compatible : ?.Outcome -> Prop :=
    fun o => OutcomeCompatible tree selectors i o
  letI : DecidablePred compatible := Classical.decPred compatible
  letI : Fintype (Subtype compatible) :=
    Fintype.subtype (Finset.univ.filter compatible) (fun o => by
      simp [compatible])
  exact
  { Outcome := Subtype compatible
    branch := fun o => ?.branch o.1
    value := fun o => ?.value o.1
    trace_nonincreasing := by
      intro ? h?
      let weight : ?.Outcome -> ? := fun o =>
        (Matrix.trace (KrausFamily.applyMat (?.branch o) ?)).re
      have hle :
        ? o in Finset.univ.filter compatible, weight o <=
        ? o : ?.Outcome, weight o := by
        apply Finset.sum_le_sum_of_subset_of_nonneg
        (Finset.filter_subset _ _)
      intro o _ _
      have hp := KrausFamily.applyMat_posSemidef (?.branch o) h?
      change 0 <= ? x, ((KrausFamily.applyMat (?.branch o) ?) x x).re
      exact Finset.sum_nonneg fun x _ =>
        (Complex.nonneg_iff.mp hp.diag_nonneg).1

```

```

    rw [Finset.sum_subtype (p := compatible)
      (Finset.univ.filter compatible) (fun o => by simp) weight] at hle
    exact hle.trans (?.trace_nonincreasing ? h?) }

/-- Physical embedding of a coordinate restriction is invariant under
combining explicit selectors with the residual heap coordinate. The two
finite instruments differ only by a proof-subtype reindexing. -/
theorem embed_restrictedInstrument_encodePath {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {start : ChannelConfig C} (tree : ChannelTree C start)
  (R : ChannelTreeRealization D_0 j_0 realize tree)
  (selectors : List Bool) (i : Nat) :
  embed (restrictedInstrument D_0 j_0 realize tree R selectors i) =
    embed (restrictedInstrument D_0 j_0 realize tree R []
      (HardwareAdequacy.encodePath selectors i)) := by
classical
let ? := restrictedInstrument D_0 j_0 realize tree R selectors i
let ? := restrictedInstrument D_0 j_0 realize tree R []
  (HardwareAdequacy.encodePath selectors i)
let e : ?.Outcome ? ?.Outcome :=
  { toFun := fun o => <o.1,
    (outcomeCompatible_encodePath tree selectors i o.1).mp o.2>
    invFun := fun o => <o.1,
    (outcomeCompatible_encodePath tree selectors i o.1).mpr o.2>
    left_inv := by rintro <o, ho>; rfl
    right_inv := by rintro <o, ho>; rfl }
apply embed_congr_of_outcome_equiv ? ? e
* intro o
  rfl
* intro o
  rfl

/-- A coordinate with no compatible completed outcome is unresolved and
contributes lattice bottom, rather than the non-bottom vacuous TT theory of an
empty physical instrument. -/
noncomputable def restrictedResult {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {start : ChannelConfig C} (tree : ChannelTree C start)
  (R : ChannelTreeRealization D_0 j_0 realize tree)
  (selectors : List Bool) (i : Nat)
  (k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)) :
  TTResult 2 := by
classical
exact
  if ResultAvailable tree selectors i
  then embed (restrictedInstrument D_0 j_0 realize tree R selectors i) k
  else False

/-- Restricted results admit the same selector-to-coordinate normalization
as their underlying instruments. -/
theorem restrictedResult_encodePath {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {start : ChannelConfig C} (tree : ChannelTree C start)
  (R : ChannelTreeRealization D_0 j_0 realize tree)

```

```

(selectors : List Bool) (i : Nat)
(k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)) :
restrictedResult D_0 j_0 realize tree R selectors i k =
  restrictedResult D_0 j_0 realize tree R []
    (HardwareAdequacy.encodePath selectors i) k := by
classical
unfold restrictedResult
apply if_congr (resultAvailable_encodePath tree selectors i)
* exact congrArg
  (fun f : ScottMap
    (ScottMap (HSemanticValue D_0 j_0) (TTResult 2)) (TTResult 2) => f k)
    (embed_restrictedInstrument_encodePath D_0 j_0 realize tree R selectors i)
* rfl

theorem restrictedResult_eq_embed {C : Type}
(D_0 : QDomain.{0})
(j_0 : IsContinuousLatticeProjection D_0.carrier
  (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
(realize : C -> HSemanticValue D_0 j_0)
{start : ChannelConfig C} (tree : ChannelTree C start)
(R : ChannelTreeRealization D_0 j_0 realize tree)
(selectors : List Bool) (i : Nat)
(k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2))
(havail : ResultAvailable tree selectors i) :
restrictedResult D_0 j_0 realize tree R selectors i k =
  embed (restrictedInstrument D_0 j_0 realize tree R selectors i) k := by
simp [restrictedResult, havail]

theorem restrictedResult_eq_bot {C : Type}
(D_0 : QDomain.{0})
(j_0 : IsContinuousLatticeProjection D_0.carrier
  (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
(realize : C -> HSemanticValue D_0 j_0)
{start : ChannelConfig C} (tree : ChannelTree C start)
(R : ChannelTreeRealization D_0 j_0 realize tree)
(selectors : List Bool) (i : Nat)
(k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2))
(hunavailable : not ResultAvailable tree selectors i) :
restrictedResult D_0 j_0 realize tree R selectors i k = False := by
simp [restrictedResult, hunavailable]

theorem restrictedResult_le_embed {C : Type}
(D_0 : QDomain.{0})
(j_0 : IsContinuousLatticeProjection D_0.carrier
  (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
(realize : C -> HSemanticValue D_0 j_0)
{start : ChannelConfig C} (tree : ChannelTree C start)
(R : ChannelTreeRealization D_0 j_0 realize tree)
(selectors : List Bool) (i : Nat)
(k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)) :
restrictedResult D_0 j_0 realize tree R selectors i k <=
  embed (restrictedInstrument D_0 j_0 realize tree R selectors i) k := by
classical
by_cases havail : ResultAvailable tree selectors i
* rw [restrictedResult_eq_embed D_0 j_0 realize tree R selectors i k havail]
* rw [restrictedResult_eq_bot D_0 j_0 realize tree R selectors i k havail]
  exact bot_le

theorem restrictedOutcome_nonempty_of_all_compatible {C : Type}
(D_0 : QDomain.{0})
(j_0 : IsContinuousLatticeProjection D_0.carrier
  (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
(realize : C -> HSemanticValue D_0 j_0)

```

```

{start : ChannelConfig C} (tree : ChannelTree C start)
(R : ChannelTreeRealization D_0 j_0 realize tree)
(selectors : List Bool) (i : Nat)
(hall : forall o, OutcomeCompatible tree selectors i o) :
Nonempty
  (restrictedInstrument D_0 j_0 realize tree R selectors i).Outcome := by
obtain <o> := tree.instrument_outcome_nonempty
exact <<o, hall o>>

theorem token_of_restrictedInstrument {C : Type}
(D_0 : QDomain.{0})
(j_0 : IsContinuousLatticeProjection D_0.carrier
  (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
(realize : C -> HSemanticValue D_0 j_0)
{start : ChannelConfig C} (tree : ChannelTree C start)
(R : ChannelTreeRealization D_0 j_0 realize tree)
(selectors : List Bool) (i : Nat)
(? : HSemanticValue D_0 j_0 -> FiniteInstrumentComp 2 PUnit.{1})
(k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2))
(hk : QLambda.Adequacy.PresentedAt
  (restrictedInstrument D_0 j_0 realize tree R selectors i) k ?)
(token : TTObservationToken 2) :
token in embed (restrictedInstrument D_0 j_0 realize tree R selectors i) k <->
  TTObservationToken.Holds resultCode token
  ((restrictedInstrument D_0 j_0 realize tree R selectors i).bind ?) :=
  QLambda.Adequacy.token_of_embed _ ? k hk token

/--! ## Sound replacement for the old normalized-start target -/

def channelTreeResults {C : Type}
(D_0 : QDomain.{0})
(j_0 : IsContinuousLatticeProjection D_0.carrier
  (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
(realize : C -> HSemanticValue D_0 j_0)
(start : ChannelConfig C) (selectors : List Bool) (i : Nat)
(k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)) :
Set (TTResult 2) :=
{T | exists fuel, exists (tree : ChannelTree C start)
  (R : ChannelTreeRealization D_0 j_0 realize tree),
  tree.depth <= fuel /\
  T = restrictedResult D_0 j_0 realize tree R selectors i k}

theorem channelTreeResults_encodePath {C : Type}
(D_0 : QDomain.{0})
(j_0 : IsContinuousLatticeProjection D_0.carrier
  (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
(realize : C -> HSemanticValue D_0 j_0)
(start : ChannelConfig C) (selectors : List Bool) (i : Nat)
(k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)) :
channelTreeResults D_0 j_0 realize start selectors i k =
  channelTreeResults D_0 j_0 realize start []
  (HardwareAdequacy.encodePath selectors i) k := by
ext T
constructor
* rintro <fuel, tree, R, hdepth, rfl>
  exact <fuel, tree, R, hdepth,
    restrictedResult_encodePath D_0 j_0 realize tree R selectors i k>
* rintro <fuel, tree, R, hdepth, rfl>
  exact <fuel, tree, R, hdepth,
    (restrictedResult_encodePath D_0 j_0 realize tree R selectors i k).symm>

/-- Channel-tree completeness is the sound equality target for `interp`.
Unlike the normalized-tree statement, its operational side never drops a

```

```

nonzero channel merely because one chosen input state annihilates it. -/
structure ChannelTreeCompleteness {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (start : ChannelConfig C) (denotation : HSemanticComp D_0 j_0) : Prop where
selected_result_eq_channelTree_sup :
  forall selectors i k,
    HardwareAdequacy.selectPath selectors denotation i k =
      sSup (channelTreeResults D_0 j_0 realize start selectors i k)

/-- Completeness at the sound finitely-presented continuation boundary.
Unlike `ChannelTreeCompleteness`, this interface only asks for continuations
whose value observations are represented by finite physical instruments. -/
structure PresentedChannelTreeCompleteness {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (start : ChannelConfig C) (denotation : HSemanticComp D_0 j_0) : Prop where
selected_result_eq_channelTree_sup_presented :
  forall selectors i
    (? : HSemanticValue D_0 j_0 -> FiniteInstrumentComp 2 PUnit.{1})
    (k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)),
    (forall d, k d = (? d).satisfiedTTTheory resultCode) ->
    HardwareAdequacy.selectPath selectors denotation i k =
      sSup (channelTreeResults D_0 j_0 realize start selectors i k)

/-- Coordinate-only form proved by the path-indexed fundamental theorem.
Explicit selector lists are recovered by `encodePath`. -/
structure CoordinatePresentedChannelTreeCompleteness {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (start : ChannelConfig C) (denotation : HSemanticComp D_0 j_0) : Prop where
coordinate_result_eq_channelTree_sup_presented :
  forall i
    (? : HSemanticValue D_0 j_0 -> FiniteInstrumentComp 2 PUnit.{1})
    (k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)),
    (forall d, k d = (? d).satisfiedTTTheory resultCode) ->
    denotation i k =
      sSup (channelTreeResults D_0 j_0 realize start [] i k)

theorem CoordinatePresentedChannelTreeCompleteness.toPresented {C : Type}
  {D_0 : QDomain.{0}}
  {j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier)}
  {realize : C -> HSemanticValue D_0 j_0}
  {start : ChannelConfig C} {denotation : HSemanticComp D_0 j_0}
  (h : CoordinatePresentedChannelTreeCompleteness D_0 j_0 realize
    start denotation) :
  PresentedChannelTreeCompleteness D_0 j_0 realize start denotation where
selected_result_eq_channelTree_sup_presented := by
  intro selectors i ? k hk
  rw [HardwareAdequacy.selectPath_apply_encode,
    h.coordinate_result_eq_channelTree_sup_presented
      (HardwareAdequacy.encodePath selectors i) ? k hk,
    <- channelTreeResults_encodePath D_0 j_0 realize start selectors i k]

/-- The packaged statement used by the stacked fundamental lemma: the CEK
state denotes `denotation`, and finite channel trees are complete for every

```

```

finitely represented final continuation. -/
structure PresentedChannelConfigCompleteness {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (start : ChannelConfig C) (denotation : HSemanticComp D_0 j_0) : Prop where
  related : ChannelConfigRel D_0 j_0 realize start denotation
  complete : PresentedChannelTreeCompleteness D_0 j_0 realize start denotation

/-- One realized channel tree is pointwise below its denotation. -/
structure ChannelTreePointwiseSound {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {start : ChannelConfig C} (denotation : HSemanticComp D_0 j_0)
  (tree : ChannelTree C start)
  (R : ChannelTreeRealization D_0 j_0 realize tree) : Prop where
  restricted_le_selected :
  forall selectors i k,
    restrictedResult D_0 j_0 realize tree R selectors i k <=
      HardwareAdequacy.selectPath selectors denotation i k

/-- Pointwise soundness at the finitely-presented continuation boundary. -/
structure PresentedChannelTreePointwiseSound {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {start : ChannelConfig C} (denotation : HSemanticComp D_0 j_0)
  (tree : ChannelTree C start)
  (R : ChannelTreeRealization D_0 j_0 realize tree) : Prop where
  restricted_le_selected_presented :
  forall selectors i
    (? : HSemanticValue D_0 j_0 -> FiniteInstrumentComp 2 PUnit.{1})
    (k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)),
    (forall d, k d = (? d).satisfiedTTTheory resultCode) ->
    restrictedResult D_0 j_0 realize tree R selectors i k <=
      HardwareAdequacy.selectPath selectors denotation i k

/-- Global one-sided soundness of all finite channel trees. -/
structure ChannelOperationalSoundness {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (start : ChannelConfig C) (denotation : HSemanticComp D_0 j_0) : Prop where
  tree_pointwise :
  forall (tree : ChannelTree C start)
    (R : ChannelTreeRealization D_0 j_0 realize tree),
    ChannelTreePointwiseSound D_0 j_0 realize denotation tree R

/-- Global one-sided soundness at represented final continuations. -/
structure PresentedChannelOperationalSoundness {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (start : ChannelConfig C) (denotation : HSemanticComp D_0 j_0) : Prop where
  tree_pointwise :
  forall (tree : ChannelTree C start)
    (R : ChannelTreeRealization D_0 j_0 realize tree),

```



```

PresentedChannelTreePointwiseSound D_0 j_0 realize denotation tree R

/-- Exact completeness implies completeness at every finitely-presented
continuation. -/
theorem ChannelTreeCompleteness.toPresented {C : Type}
  {D_0 : QDomain.{0}}
  {j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier)}
  {realize : C -> HSemanticValue D_0 j_0}
  {start : ChannelConfig C} {denotation : HSemanticComp D_0 j_0}
  (h : ChannelTreeCompleteness D_0 j_0 realize start denotation) :
  PresentedChannelTreeCompleteness D_0 j_0 realize start denotation where
  selected_result_eq_channelTree_sup_presented :=
  fun selectors i ? k _hk =>
    h.selected_result_eq_channelTree_sup selectors i k

/-- Exact channel-tree completeness contains its one-sided soundness half. -/
theorem ChannelTreeCompleteness.toSoundness {C : Type}
  {D_0 : QDomain.{0}}
  {j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier)}
  {realize : C -> HSemanticValue D_0 j_0}
  {start : ChannelConfig C} {denotation : HSemanticComp D_0 j_0}
  (h : ChannelTreeCompleteness D_0 j_0 realize start denotation) :
  ChannelOperationalSoundness D_0 j_0 realize start denotation where
  tree_pointwise := by

```

Lean 4 source (lines 1201–1600)

```

  intro tree R
  constructor
  intro selectors i k
  rw [h.selected_result_eq_channelTree_sup selectors i k]
  apply le_sSup
  exact <tree.depth, tree, R, le_rfl, rfl>

/-- Presented completeness likewise contains represented-continuation
soundness. -/
theorem PresentedChannelTreeCompleteness.toSoundness {C : Type}
  {D_0 : QDomain.{0}}
  {j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier)}
  {realize : C -> HSemanticValue D_0 j_0}
  {start : ChannelConfig C} {denotation : HSemanticComp D_0 j_0}
  (h : PresentedChannelTreeCompleteness D_0 j_0 realize start denotation) :
  PresentedChannelOperationalSoundness D_0 j_0 realize start denotation where
  tree_pointwise := by
    intro tree R
    constructor
    intro selectors i ? k hk
    rw [h.selected_result_eq_channelTree_sup_presented selectors i ? k hk]
    apply le_sSup
    exact <tree.depth, tree, R, le_rfl, rfl>

/-- Initial proof configuration corresponding to an executable normalized
start. -/
def initialChannelConfig {C : Type} (code : Term (QubitPrimitive C))
  (quantum : NormalizedDensity 2) : ChannelConfig C :=
  ofConfig (initialConfig code quantum)

/-- The repaired initial proof state uses the natural empty-environment
logical relation and denotes the compositional interpreter exactly. -/
theorem initialChannelConfig_related {C : Type}
  (D_0 : QDomain.{0})

```

```

(j_0 : IsContinuousLatticeProjection D_0.carrier
  (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
(realize : C -> HSemanticValue D_0 j_0)
(code : Term (QubitPrimitive C))
(quantum : NormalizedDensity 2)
(semanticEnv : Env (HSemanticValue D_0 j_0)) :
ChannelConfigRel D_0 j_0 realize (initialChannelConfig code quantum)
  (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv) := by
refine <interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv,
  id, ?_, StackRel.nil, rfl>
exact ControlRel.term code [] semanticEnv
  (env_nil D_0 j_0 realize semanticEnv)

theorem initialChannelConfig_wellScoped {C : Type}
  {code : Term (QubitPrimitive C)} (hclosed : Closed code)
  (quantum : NormalizedDensity 2) :
  ChannelConfig.WellScoped (initialChannelConfig code quantum) :=
ofConfig_wellScoped (initialConfig_wellScoped hclosed quantum)

/-- The initial state also satisfies the observation-indexed relation at any
encoded path and finitely presented final continuation. -/
theorem initialPathChannelConfig_related {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (code : Term (QubitPrimitive C))
  (quantum : NormalizedDensity 2)
  (semanticEnv : Env (HSemanticValue D_0 j_0))
  (active : Nat)
  (k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)) :
PathChannelConfigRel D_0 j_0 realize
  (initialChannelConfig code quantum) active [] k
  (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv active k) := by
refine <rfl, interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv,
  k, ?_, PathStackRel.nil, rfl>
exact ControlRel.term code [] semanticEnv
  (env_nil D_0 j_0 realize semanticEnv)

/-- Realize every payload leaf by the supplied classical embedding. -/
noncomputable def payloadLeafValue {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (leaf : ChannelLeaf C) : HSemanticValue D_0 j_0 :=
match leaf.isTerminal.value with
| .payload c => realize c
| .closure .. => False
| .recClosure .. => False

theorem ValueRel.payload_eq {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  {realize : C -> HSemanticValue D_0 j_0} {c : C}
  {d : HSemanticValue D_0 j_0}
  (h : ValueRel D_0 j_0 realize (.payload c) d) :
  d = realize c := by
cases h
rfl

theorem payloadLeafValue_payload {C : Type}

```

```

(D_0 : QDomain.{0})
(j_0 : IsContinuousLatticeProjection D_0.carrier
  (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
(realize : C -> HSemanticValue D_0 j_0)
(leaf : ChannelLeaf C) {c : C}
(hc : leaf.isTerminal.value = .payload c) :
  payloadLeafValue D_0 j_0 realize leaf = realize c := by
simp [payloadLeafValue, hc]

/-- The return primitive has a complete one-step channel tree. -/
def returnTree {C : Type} (value : C) (quantum : NormalizedDensity 2) :
  ChannelTree C (initialChannelConfig (.prim (.ret value)) quantum) :=
  ChannelTree.internal
    (ChannelInternalStep.returnPrimitive
      (s := initialChannelConfig (.prim (.ret value)) quantum)
      (value := value))
    (ChannelTree.terminal
      { value := .payload value, control_eq := rfl, stack_eq := rfl })

/-- Pauli-X has a complete one-step channel tree with exact unnormalized
operation semantics (normalization happens only in the executable machine). -/
noncomputable def pauliXTree {C : Type} (value : C)
  (quantum : NormalizedDensity 2) :
  ChannelTree C (initialChannelConfig (.prim (.pauliX value)) quantum) :=
  ChannelTree.internal
    (ChannelInternalStep.pauliXPrimitive
      (s := initialChannelConfig (.prim (.pauliX value)) quantum)
      (value := value))
    (ChannelTree.terminal
      { value := .payload value, control_eq := rfl, stack_eq := rfl })

/-- Measurement always has both channel children, including a child whose
state is zero on the selected initial density. -/
noncomputable def measurementTree {C : Type} (zeroValue oneValue : C)
  (quantum : NormalizedDensity 2) :
  ChannelTree C
    (initialChannelConfig (.prim (.measureZ zeroValue oneValue)) quantum) :=
  ChannelTree.measurement
    (s := initialChannelConfig
      (.prim (.measureZ zeroValue oneValue)) quantum)
    (ChannelTree.terminal
      { value := .payload zeroValue
        control_eq := rfl
        stack_eq := rfl })
    (ChannelTree.terminal
      { value := .payload oneValue
        control_eq := rfl
        stack_eq := rfl })

/-- The left one-sided execution of an internal choice between returns. -/
def internReturnLeftTree {C : Type} (leftValue rightValue : C)
  (quantum : NormalizedDensity 2) :
  ChannelTree C
    (initialChannelConfig
      (.intern (.prim (.ret leftValue)) (.prim (.ret rightValue)))) quantum) :=
  ChannelTree.internal
    (ChannelInternalStep.internalLeft
      (s := initialChannelConfig
        (.intern (.prim (.ret leftValue)) (.prim (.ret rightValue)))) quantum)
    (returnTree leftValue quantum))

/-- The right one-sided execution of an internal choice between returns. -/
def internReturnRightTree {C : Type} (leftValue rightValue : C)

```

```

    (quantum : NormalizedDensity 2) :
    ChannelTree C
      (initialChannelConfig
        (.intern (.prim (.ret leftValue)) (.prim (.ret rightValue))) quantum) :=
ChannelTree.internal
  (ChannelInternalStep.internalRight
    (s := initialChannelConfig
      (.intern (.prim (.ret leftValue)) (.prim (.ret rightValue))) quantum))
    (returnTree rightValue quantum)

theorem returnTree_depth {C : Type} (value : C)
  (quantum : NormalizedDensity 2) :
  (returnTree value quantum).depth = 1 := by
simp [returnTree, ChannelTree.depth]

theorem pauliXTree_depth {C : Type} (value : C)
  (quantum : NormalizedDensity 2) :
  (pauliXTree value quantum).depth = 1 := by
simp [pauliXTree, ChannelTree.depth]

theorem measurementTree_depth {C : Type} (zeroValue oneValue : C)
  (quantum : NormalizedDensity 2) :
  (measurementTree zeroValue oneValue quantum).depth = 1 := by
simp [measurementTree, ChannelTree.depth]

theorem internReturnLeftTree_depth {C : Type} (leftValue rightValue : C)
  (quantum : NormalizedDensity 2) :
  (internReturnLeftTree leftValue rightValue quantum).depth = 2 := by
simp [internReturnLeftTree, returnTree, ChannelTree.depth]

theorem internReturnRightTree_depth {C : Type} (leftValue rightValue : C)
  (quantum : NormalizedDensity 2) :
  (internReturnRightTree leftValue rightValue quantum).depth = 2 := by
simp [internReturnRightTree, returnTree, ChannelTree.depth]

theorem returnTree_leaf_payload {C : Type} (value : C)
  (quantum : NormalizedDensity 2)
  (o : (returnTree value quantum).instrument.Outcome) :
  ((returnTree value quantum).instrument.value o).isTerminal.value =
    .payload value := by
rcases o with <<>, <>>
rfl

theorem pauliXTree_leaf_payload {C : Type} (value : C)
  (quantum : NormalizedDensity 2)
  (o : (pauliXTree value quantum).instrument.Outcome) :
  ((pauliXTree value quantum).instrument.value o).isTerminal.value =
    .payload value := by
rcases o with <<>, <>>
rfl

theorem measurementTree_leaf_payload {C : Type}
  (zeroValue oneValue : C) (quantum : NormalizedDensity 2)
  (o : (measurementTree zeroValue oneValue quantum).instrument.Outcome) :
  ((measurementTree zeroValue oneValue quantum).instrument.value o
    ).isTerminal.value =
    .payload (match o.1 with
      | true => oneValue
      | false => zeroValue) := by
obtain <b, hb> := o
cases b <;> (cases hb; rfl)

theorem returnTree_selectors {C : Type} (value : C)

```

```

    (quantum : NormalizedDensity 2)
    (o : (returnTree value quantum).instrument.Outcome) :
    ((returnTree value quantum).instrument.value o).selectors = [] := by
rcases o with <<>, <>>
rfl

theorem pauliXTree_selectors {C : Type} (value : C)
  (quantum : NormalizedDensity 2)
  (o : (pauliXTree value quantum).instrument.Outcome) :
  ((pauliXTree value quantum).instrument.value o).selectors = [] := by
rcases o with <<>, <>>
rfl

theorem measurementTree_selectors {C : Type}
  (zeroValue oneValue : C) (quantum : NormalizedDensity 2)
  (o : (measurementTree zeroValue oneValue quantum).instrument.Outcome) :
  ((measurementTree zeroValue oneValue quantum).instrument.value o
   ).selectors = [] := by
obtain <b, hb> := o
cases b <;> (cases hb; rfl)

theorem returnTree_compatible {C : Type} (value : C)
  (quantum : NormalizedDensity 2) (selectors : List Bool) (i : Nat)
  (o : (returnTree value quantum).instrument.Outcome) :
  OutcomeCompatible (returnTree value quantum) selectors i o := by
simpa [OutcomeCompatible, returnTree_selectors] using List.nil_prefix

theorem pauliXTree_compatible {C : Type} (value : C)
  (quantum : NormalizedDensity 2) (selectors : List Bool) (i : Nat)
  (o : (pauliXTree value quantum).instrument.Outcome) :
  OutcomeCompatible (pauliXTree value quantum) selectors i o := by
simpa [OutcomeCompatible, pauliXTree_selectors] using List.nil_prefix

theorem measurementTree_compatible {C : Type}
  (zeroValue oneValue : C) (quantum : NormalizedDensity 2)
  (selectors : List Bool) (i : Nat)
  (o : (measurementTree zeroValue oneValue quantum).instrument.Outcome) :
  OutcomeCompatible (measurementTree zeroValue oneValue quantum)
    selectors i o := by
simpa [OutcomeCompatible, measurementTree_selectors] using List.nil_prefix

theorem internReturnLeftTree_leaf_payload {C : Type}
  (leftValue rightValue : C) (quantum : NormalizedDensity 2)
  (o : (internReturnLeftTree leftValue rightValue quantum).instrument.Outcome) :
  ((internReturnLeftTree leftValue rightValue quantum).instrument.value o
   ).isTerminal.value = .payload leftValue := by
rcases o with <<>, <<>, <>>>
rfl

theorem internReturnRightTree_leaf_payload {C : Type}
  (leftValue rightValue : C) (quantum : NormalizedDensity 2)
  (o : (internReturnRightTree leftValue rightValue quantum).instrument.Outcome) :
  ((internReturnRightTree leftValue rightValue quantum).instrument.value o
   ).isTerminal.value = .payload rightValue := by
rcases o with <<>, <<>, <>>>
rfl

theorem internReturnLeftTree_compatible {C : Type}
  (leftValue rightValue : C) (quantum : NormalizedDensity 2)
  (selectors : List Bool) (i : Nat)
  (o : (internReturnLeftTree leftValue rightValue quantum).instrument.Outcome) :
  OutcomeCompatible (internReturnLeftTree leftValue rightValue quantum)
    selectors i o := by

```

```

rcases o with <<>, <<>, <>>>
simp [OutcomeCompatible, internReturnLeftTree, returnTree,
      ChannelTree.instrument]
exact List.nil_prefix

theorem internReturnRightTree_compatible {C : Type}
  (leftValue rightValue : C) (quantum : NormalizedDensity 2)
  (selectors : List Bool) (i : Nat)
  (o : (internReturnRightTree leftValue rightValue quantum).instrument.Outcome) :
  OutcomeCompatible (internReturnRightTree leftValue rightValue quantum)
    selectors i o := by
rcases o with <<>, <<>, <>>>
simp [OutcomeCompatible, internReturnRightTree, returnTree,
      ChannelTree.instrument]
exact List.nil_prefix

noncomputable def returnTreeRealization {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (value : C) (quantum : NormalizedDensity 2) :
  ChannelTreeRealization D_0 j_0 realize (returnTree value quantum) where
value := payloadLeafValue D_0 j_0 realize
related := by
  intro o
  have hc := returnTree_leaf_payload value quantum o
  unfold payloadLeafValue
  rw [hc]
  exact ValueRel.payload value

noncomputable def pauliXTreeRealization {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (value : C) (quantum : NormalizedDensity 2) :
  ChannelTreeRealization D_0 j_0 realize (pauliXTree value quantum) where
value := payloadLeafValue D_0 j_0 realize
related := by
  intro o
  have hc := pauliXTree_leaf_payload value quantum o
  unfold payloadLeafValue
  rw [hc]
  exact ValueRel.payload value

noncomputable def measurementTreeRealization {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (zeroValue oneValue : C) (quantum : NormalizedDensity 2) :
  ChannelTreeRealization D_0 j_0 realize
    (measurementTree zeroValue oneValue quantum) where
value := payloadLeafValue D_0 j_0 realize
related := by
  intro o
  have hc := measurementTree_leaf_payload zeroValue oneValue quantum o
  unfold payloadLeafValue
  rw [hc]
  obtain <b, hb> := o
  cases b <|> exact ValueRel.payload _

```

```

noncomputable def internReturnLeftTreeRealization {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (leftValue rightValue : C) (quantum : NormalizedDensity 2) :
  ChannelTreeRealization D_0 j_0 realize
  (internReturnLeftTree leftValue rightValue quantum) where
value := payloadLeafValue D_0 j_0 realize
related := by
  intro o
  have hc := internReturnLeftTree_leaf_payload leftValue rightValue quantum o
  unfold payloadLeafValue
  rw [hc]
  exact ValueRel.payload leftValue

noncomputable def internReturnRightTreeRealization {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (leftValue rightValue : C) (quantum : NormalizedDensity 2) :
  ChannelTreeRealization D_0 j_0 realize
  (internReturnRightTree leftValue rightValue quantum) where
value := payloadLeafValue D_0 j_0 realize
related := by
  intro o
  have hc := internReturnRightTree_leaf_payload leftValue rightValue quantum o
  unfold payloadLeafValue
  rw [hc]
  exact ValueRel.payload rightValue

/-- Restriction of a fully compatible tree is only a subtype reindexing. -/
noncomputable def restrictedOutcomeEquiv {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {start : ChannelConfig C} (tree : ChannelTree C start)
  (R : ChannelTreeRealization D_0 j_0 realize tree)
  (selectors : List Bool) (i : Nat)
  (hall : forall o, OutcomeCompatible tree selectors i o) :
  (realizedInstrument D_0 j_0 realize tree R).Outcome ?
  (restrictedInstrument D_0 j_0 realize tree R selectors i).Outcome :=
(Equiv.subtypeUnivEquiv hall).symm

theorem embed_restricted_of_all_compatible {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))

```

Lean 4 source (lines 1601–2000)

```

  (realize : C -> HSemanticValue D_0 j_0)
  {start : ChannelConfig C} (tree : ChannelTree C start)
  (R : ChannelTreeRealization D_0 j_0 realize tree)
  (selectors : List Bool) (i : Nat)
  (hall : forall o, OutcomeCompatible tree selectors i o) :
  embed (restrictedInstrument D_0 j_0 realize tree R selectors i) =
  embed (realizedInstrument D_0 j_0 realize tree R) := by
refine embed_congr_of_outcome_equiv
  (restrictedInstrument D_0 j_0 realize tree R selectors i)
  (realizedInstrument D_0 j_0 realize tree R)
  (restrictedOutcomeEquiv D_0 j_0 realize tree R selectors i hall).symm

```

```

    ?_ ?_
* intro o
  rfl
* intro o
  rfl

/-- A well-scoped related terminal tree realizes exactly the deterministic
semantic return selected by the logical relation. -/
theorem terminal_realized_eq_unit {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  {realize : C -> HSemanticValue D_0 j_0}
  {s : ChannelConfig C} (hterminal : ChannelTerminal s)
  (hscoped : ChannelConfig.WellScoped s)
  {answer : HSemanticComp D_0 j_0}
  (hrel : ChannelConfigRel D_0 j_0 realize s answer)
  (R : ChannelTreeRealization D_0 j_0 realize
    (ChannelTree.terminal hterminal)) :
  exists d : HSemanticValue D_0 j_0,
    answer = semanticUnit (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0) d /\
      embed (realizedInstrument D_0 j_0 realize
        (ChannelTree.terminal hterminal) R) =
        embed (FiniteInstrumentComp.unit (n := 2) d) := by
  obtain <d, hd, hanswer> := terminal_related D_0 j_0 hterminal hrel
  refine <d, hanswer, ?_>
  let ? := realizedInstrument D_0 j_0 realize
    (ChannelTree.terminal hterminal) R
  letI : Unique ?.Outcome :=
    { default := <>
      uniq := by intro o; rcases o with <>; rfl }
  refine embed_eq_unit_of_unique ? d ?_ ?_
* intro o
  rcases o with <>
  change R.value <s, hterminal, [], []> = d
  have hvalueScoped : RuntimeValue.WellScoped hterminal.value := by
    rcases hscoped with <hcontrol, _>
    rw [hterminal.control_eq] at hcontrol
    exact hcontrol.2
  exact valueRel_functional D_0 j_0 realize hvalueScoped (R.related <>) hd
* intro o
  rcases o with <>
  rfl

/-- Terminal channel trees satisfy pointwise soundness with equality. -/
theorem terminal_channelTreePointwiseSound {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  {realize : C -> HSemanticValue D_0 j_0}
  {s : ChannelConfig C} (hterminal : ChannelTerminal s)
  (hscoped : ChannelConfig.WellScoped s)
  {answer : HSemanticComp D_0 j_0}
  (hrel : ChannelConfigRel D_0 j_0 realize s answer)
  (R : ChannelTreeRealization D_0 j_0 realize
    (ChannelTree.terminal hterminal)) :
  ChannelTreePointwiseSound D_0 j_0 realize answer
  (ChannelTree.terminal hterminal) R := by
  obtain <d, hanswer, hrealized> :=
    terminal_realized_eq_unit D_0 j_0 hterminal hscoped hrel R
  constructor
  intro selectors i k

```



```

have hall : forall o, OutcomeCompatible
  (ChannelTree.terminal hterminal) selectors i o := by
  intro o
  rcases o with <>
  exact List.nil_prefix
rw [restrictedResult_eq_embed D_0 j_0 realize
  (ChannelTree.terminal hterminal) R selectors i k (by
    simp [ResultAvailable, resultAvailableAt])]
rw [congrArg (fun f : ScottMap
  (ScottMap (HSemanticValue D_0 j_0) (TTResult 2)) (TTResult 2) => f k)
  (embed_restricted_of_all_compatible D_0 j_0 realize
    (ChannelTree.terminal hterminal) R selectors i hall)]
rw [hrealized, embed_unit, hanswer,
  HardwareAdequacy.selectPath_apply_encode]
rfl

/-- A well-scoped related terminal tree realizes the denotation exactly,
not merely as an upper bound. -/
theorem terminal_restrictedResult_eq {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEnternalContinuationPower 2)) D_0.carrier))
  {realize : C -> HSemanticValue D_0 j_0}
  {s : ChannelConfig C} (hterminal : ChannelTerminal s)
  (hscoped : ChannelConfig.WellScoped s)
  {answer : HSemanticComp D_0 j_0}
  (hrel : ChannelConfigRel D_0 j_0 realize s answer)
  (R : ChannelTreeRealization D_0 j_0 realize
    (ChannelTree.terminal hterminal))
  (selectors : List Bool) (i : Nat)
  (k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)) :
  restrictedResult D_0 j_0 realize
    (ChannelTree.terminal hterminal) R selectors i k =
    HardwareAdequacy.selectPath selectors answer i k := by
obtain <d, hanswer, hrealized> :=
  terminal_realized_eq_unit D_0 j_0 hterminal hscoped hrel R
have hall : forall o, OutcomeCompatible
  (ChannelTree.terminal hterminal) selectors i o := by
  intro o
  rcases o with <>
  exact List.nil_prefix
rw [restrictedResult_eq_embed D_0 j_0 realize
  (ChannelTree.terminal hterminal) R selectors i k (by
    simp [ResultAvailable, resultAvailableAt])]
rw [congrArg (fun f : ScottMap
  (ScottMap (HSemanticValue D_0 j_0) (TTResult 2)) (TTResult 2) => f k)
  (embed_restricted_of_all_compatible D_0 j_0 realize
    (ChannelTree.terminal hterminal) R selectors i hall)]
rw [hrealized, embed_unit, hanswer,
  HardwareAdequacy.selectPath_apply_encode]
rfl

/-- Canonical realization of a related terminal value. -/
noncomputable def terminalValueRealization {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEnternalContinuationPower 2)) D_0.carrier))
  {realize : C -> HSemanticValue D_0 j_0}
  {s : ChannelConfig C} (hterminal : ChannelTerminal s)
  {d : HSemanticValue D_0 j_0}
  (hd : ValueRel D_0 j_0 realize hterminal.value d) :
  ChannelTreeRealization D_0 j_0 realize
    (ChannelTree.terminal hterminal) where

```

```

value := fun _ => d
related := by
  intro o
  rcases o with <>
  exact hd

theorem returnTree_branch {C : Type} (value : C)
  (quantum : NormalizedDensity 2)
  (o : (returnTree value quantum).instrument.Outcome) :
  (returnTree value quantum).instrument.branch o =
    KrausFamily.identity 2 := by
rcases o with <<>, <>>
change KrausFamily.comp (KrausFamily.identity 2)
  (channelInternalOperation
    (initialChannelConfig (.prim (.ret value)) quantum)).kraus =
    KrausFamily.identity 2
simp [channelInternalOperation, initialChannelConfig, ofConfig,
  initialConfig, QuantumOperation.identity]

theorem pauliXTree_branch {C : Type} (value : C)
  (quantum : NormalizedDensity 2)
  (o : (pauliXTree value quantum).instrument.Outcome) :
  (pauliXTree value quantum).instrument.branch o =
    Qubit.pauliXOp.kraus := by
rcases o with <<>, <>>
change KrausFamily.comp (KrausFamily.identity 2)
  (channelInternalOperation
    (initialChannelConfig (.prim (.pauliX value)) quantum)).kraus =
    Qubit.pauliXOp.kraus
simp [channelInternalOperation, initialChannelConfig, ofConfig,
  initialConfig]

theorem returnTree_realized_eq_unit {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (value : C) (quantum : NormalizedDensity 2) :
  embed (realizedInstrument D_0 j_0 realize (returnTree value quantum)
    (returnTreeRealization D_0 j_0 realize value quantum)) =
    embed (FiniteInstrumentComp.unit (n := 2) (realize value)) := by
let ? := realizedInstrument D_0 j_0 realize (returnTree value quantum)
  (returnTreeRealization D_0 j_0 realize value quantum)
let _ : Unique ?.Outcome :=
  { default := <<>, <>>
    uniq := by intro o; rcases o with <<>, <>>; rfl }
refine embed_eq_unit_of_unique ? (realize value) ?_ ?_
* intro o
  change payloadLeafValue D_0 j_0 realize
    ((returnTree value quantum).instrument.value o) = realize value
rw [payloadLeafValue_payload D_0 j_0 realize _
  (returnTree_leaf_payload value quantum o)]
* intro o
  exact returnTree_branch value quantum o

theorem pauliXTree_realized_eq_ofOperation {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (value : C) (quantum : NormalizedDensity 2) :
  embed (realizedInstrument D_0 j_0 realize (pauliXTree value quantum)
    (pauliXTreeRealization D_0 j_0 realize value quantum)) =

```

```

    embed (FiniteInstrumentComp.ofOperation Qubit.pauliXOp
      (realize value)) := by
let ? := realizedInstrument D_0 j_0 realize (pauliXTree value quantum)
  (pauliXTreeRealization D_0 j_0 realize value quantum)
let _ : Unique ?.Outcome :=
  { default := <<>, <>>
    uniq := by intro o; rcases o with <<>, <>>; rfl }
refine embed_eq_ofOperation_of_unique ? Qubit.pauliXOp (realize value) ?_ ?_
* intro o
  change payloadLeafValue D_0 j_0 realize
    ((pauliXTree value quantum).instrument.value o) = realize value
  rw [payloadLeafValue_payload D_0 j_0 realize _
    (pauliXTree_leaf_payload value quantum o)]
* intro o
  exact pauliXTree_branch value quantum o

/-- The two-outcome measurement tree reindexes to the primitive
computational-basis instrument. -/
theorem measurementTree_realized_eq_measureZ {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C → HSemanticValue D_0 j_0)
  (zeroValue oneValue : C) (quantum : NormalizedDensity 2) :
  embed (realizedInstrument D_0 j_0 realize
    (measurementTree zeroValue oneValue quantum)
    (measurementTreeRealization D_0 j_0 realize zeroValue oneValue quantum)) =
    embed (Qubit.measureZComp.map
      (fun b => if b then realize oneValue else realize zeroValue)) := by
let ? := realizedInstrument D_0 j_0 realize
  (measurementTree zeroValue oneValue quantum)
  (measurementTreeRealization D_0 j_0 realize zeroValue oneValue quantum)
let ? := Qubit.measureZComp.map
  (fun b => if b then realize oneValue else realize zeroValue)
refine embed_congr_of_outcome_equiv ? ? ?e ?hbranch ?hvalue
* exact
  { toFun := fun o => o.1
    invFun := fun b =>
      match b with
      | true => <true, <>>
      | false => <false, <>>
    left_inv := by
      intro o
      obtain <b, hb> := o
      cases b <;> (cases hb; rfl)
    right_inv := by
      intro b
      cases b <;> rfl }
* intro o
  obtain <b, hb> := o
  cases b
* cases hb
  change Qubit.measureZComp.branch false =
    KrausFamily.comp (KrausFamily.identity 2)
    (Qubit.measureZComp.branch false)
  simp
* cases hb
  change Qubit.measureZComp.branch true =
    KrausFamily.comp (KrausFamily.identity 2)
    (Qubit.measureZComp.branch true)
  simp
* intro o
  obtain <b, hb> := o

```

```

cases b
* cases hb
  change realize zeroValue =
    payloadLeafValue D_0 j_0 realize
      ((measurementTree zeroValue oneValue quantum).instrument.value
        <false, <>>)
  rw [payloadLeafValue_payload D_0 j_0 realize _
      (measurementTree_leaf_payload zeroValue oneValue quantum <false, <>>)]
* cases hb
  change realize oneValue =
    payloadLeafValue D_0 j_0 realize
      ((measurementTree zeroValue oneValue quantum).instrument.value
        <true, <>>)
  rw [payloadLeafValue_payload D_0 j_0 realize _
      (measurementTree_leaf_payload zeroValue oneValue quantum <true, <>>)]

theorem internReturnLeftTree_realized_eq_unit {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C → HSemanticValue D_0 j_0)
  (leftValue rightValue : C) (quantum : NormalizedDensity 2) :
  embed (realizedInstrument D_0 j_0 realize
    (internReturnLeftTree leftValue rightValue quantum)
    (internReturnLeftTreeRealization D_0 j_0 realize
      leftValue rightValue quantum)) =
    embed (FiniteInstrumentComp.unit (n := 2) (realize leftValue)) := by
  let ? := realizedInstrument D_0 j_0 realize
    (internReturnLeftTree leftValue rightValue quantum)
    (internReturnLeftTreeRealization D_0 j_0 realize
      leftValue rightValue quantum)
  let _ : Unique ?.Outcome :=
    { default := <<>, <<>, <>> }
    uniq := by
      intro o
      rcases o with <<>, <<>, <>>
      rfl }
  refine embed_eq_unit_of_unique ? (realize leftValue) ?_ ?_
* intro o
  change payloadLeafValue D_0 j_0 realize
    ((internReturnLeftTree leftValue rightValue quantum).instrument.value o) =
    realize leftValue
  rw [payloadLeafValue_payload D_0 j_0 realize _
      (internReturnLeftTree_leaf_payload leftValue rightValue quantum o)]
* intro o
  rcases o with <<>, <<>, <>>
  change
    KrausFamily.comp
      (KrausFamily.comp (KrausFamily.identity 2)
        (QuantumOperation.identity 2).kraus)
      (QuantumOperation.identity 2).kraus = KrausFamily.identity 2
  simp [QuantumOperation.identity]

theorem internReturnRightTree_realized_eq_unit {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C → HSemanticValue D_0 j_0)
  (leftValue rightValue : C) (quantum : NormalizedDensity 2) :
  embed (realizedInstrument D_0 j_0 realize
    (internReturnRightTree leftValue rightValue quantum)
    (internReturnRightTreeRealization D_0 j_0 realize
      leftValue rightValue quantum)) =

```

```

    embed (FiniteInstrumentComp.unit (n := 2) (realize rightValue)) := by
let ? := realizedInstrument D_0 j_0 realize
  (internReturnRightTree leftValue rightValue quantum)
  (internReturnRightTreeRealization D_0 j_0 realize
    leftValue rightValue quantum)
let _ : Unique ?.Outcome :=
{ default := <<>, <<>, <>>>
  uniq := by
    intro o
    rcases o with <<>, <<>, <>>>
    rfl }
refine embed_eq_unit_of_unique ? (realize rightValue) ?_ ?_
* intro o
  change payloadLeafValue D_0 j_0 realize
    ((internReturnRightTree leftValue rightValue quantum).instrument.value o) =
    realize rightValue
  rw [payloadLeafValue_payload D_0 j_0 realize _
    (internReturnRightTree_leaf_payload leftValue rightValue quantum o)]
* intro o
  rcases o with <<>, <<>, <>>>
  change
    KrausFamily.comp
    (KrausFamily.comp (KrausFamily.identity 2)
      (QuantumOperation.identity 2).kraus)
    (QuantumOperation.identity 2).kraus = KrausFamily.identity 2
  simp [QuantumOperation.identity]

theorem ChannelInternalStep.eq_of_return {C : Type}
  {s t : ChannelConfig C} {value : C}
  (h : ChannelInternalStep s t)
  (hc : s.control = .term (.prim (.ret value))) :
  t.control = .value (.payload value) /\
  t.env = s.env /\ t.stack = s.stack /\ t.quantum = s.quantum := by
cases h <;> cases hc
exact <rfl, rfl, rfl, rfl>

theorem ChannelInternalStep.eq_config_of_return {C : Type}
  {s t : ChannelConfig C} {value : C}
  (h : ChannelInternalStep s t)
  (hc : s.control = .term (.prim (.ret value))) :
  t = {s with control := .value (.payload value)} :=
ChannelConfig.ext
  (eq_of_return h hc).1
  (eq_of_return h hc).2.1
  (eq_of_return h hc).2.2.1
  (eq_of_return h hc).2.2.2

theorem ChannelInternalStep.eq_of_pauliX {C : Type}
  {s t : ChannelConfig C} {value : C}
  (h : ChannelInternalStep s t)
  (hc : s.control = .term (.prim (.pauliX value))) :
  t.control = .value (.payload value) /\
  t.env = s.env /\ t.stack = s.stack /\
  t.quantum = applyOperation Qubit.pauliXOp s.quantum := by
cases h <;> cases hc
exact <rfl, rfl, rfl, rfl>

theorem ChannelInternalStep.eq_of_intern {C : Type}
  {s t : ChannelConfig C} {left right : Term (QubitPrimitive C)}
  (h : ChannelInternalStep s t)
  (hc : s.control = .term (.intern left right)) :
  (t = {s with control := .term left}) /\
  (t = {s with control := .term right}) := by

```

```

cases h <;> cases hc
* exact Or.inl rfl
* exact Or.inr rfl

theorem ChannelInternalStep.not_measureZ {C : Type}
  {s t : ChannelConfig C} {zeroValue oneValue : C}
  (h : ChannelInternalStep s t)
  (hc : s.control = .term (.prim (.measureZ zeroValue oneValue))) :
  False := by
cases h <;> cases hc

```

Lean 4 source (lines 2001–2400)

```

theorem ChannelInternalStep.not_extern {C : Type}
  {s t : ChannelConfig C} {left right : Term (QubitPrimitive C)}
  (h : ChannelInternalStep s t)
  (hc : s.control = .term (.extern left right)) : False := by
cases h <;> cases hc

theorem ChannelInternalStep.not_value_nil {C : Type}
  {s t : ChannelConfig C} {v : RuntimeValue C}
  (h : ChannelInternalStep s t)
  (hc : s.control = .value v) (hs : s.stack = []) : False := by
cases h with
| evaluateArgument => cases hs
| beta => cases hs
| recBeta => cases hs
| returnPrimitive => cases hc
| pauliXPrimitive => cases hc
| lambda => cases hc
| recursive => cases hc
| application => cases hc
| internalLeft => cases hc
| internalRight => cases hc
| ?variable? => cases hc

theorem ChannelInternalStep.eq_of_application {C : Type}
  {s t : ChannelConfig C} {fn arg : Term (QubitPrimitive C)}
  (h : ChannelInternalStep s t)
  (hc : s.control = .term (.app fn arg)) :
  t = { s with
    control := .term fn
    stack := .argument arg s.env :: s.stack } := by
cases h <;> cases hc
rfl

theorem ChannelInternalStep.eq_of_lambda {C : Type}
  {s t : ChannelConfig C} {x : Name} {body : Term (QubitPrimitive C)}
  (h : ChannelInternalStep s t)
  (hc : s.control = .term (.lam x body)) :
  t = { s with control := .value (.closure x body s.env) } := by
cases h <;> cases hc
rfl

theorem ChannelInternalStep.eq_of_recursive {C : Type}
  {s t : ChannelConfig C} {self arg : Name}
  {body : Term (QubitPrimitive C)}
  (h : ChannelInternalStep s t)
  (hc : s.control = .term (.recLam self arg body)) :
  t = { s with
    control := .value (.recClosure self arg body s.env) } := by
cases h <;> cases hc
rfl

```

```

theorem ChannelInternalStep.eq_of_evaluateArgument {C : Type}
  {s t : ChannelConfig C} {fn : RuntimeValue C}
  {arg : Term (QubitPrimitive C)} {callEnv : RuntimeEnv C}
  {rest : EvalStack C}
  (h : ChannelInternalStep s t)
  (hc : s.control = .value fn)
  (hs : s.stack = .argument arg callEnv :: rest) :
  t = { s with
    control := .term arg
    env := callEnv
    stack := .function fn :: rest } := by
cases h with
| evaluateArgument =>
  cases hc
  cases hs
  rfl
| beta => cases hs
| recBeta => cases hs
| returnPrimitive => cases hc
| pauliXPrimitive => cases hc
| lambda => cases hc
| recursive => cases hc
| application => cases hc
| internalLeft => cases hc
| internalRight => cases hc
| ?variable? => cases hc

theorem ChannelInternalStep.eq_of_beta {C : Type}
  {s t : ChannelConfig C} {x : Name}
  {body : Term (QubitPrimitive C)} {closureEnv : RuntimeEnv C}
  {arg : RuntimeValue C} {rest : EvalStack C}
  (h : ChannelInternalStep s t)
  (hc : s.control = .value arg)
  (hs : s.stack = .function (.closure x body closureEnv) :: rest) :
  t = { s with
    control := .term body
    env := RuntimeEnv.bind x arg closureEnv
    stack := rest } := by
cases h with
| beta =>
  cases hc
  cases hs
  rfl
| evaluateArgument => cases hs
| recBeta => cases hs
| returnPrimitive => cases hc
| pauliXPrimitive => cases hc
| lambda => cases hc
| recursive => cases hc
| application => cases hc
| internalLeft => cases hc
| internalRight => cases hc
| ?variable? => cases hc

theorem ChannelInternalStep.eq_of_recBeta {C : Type}
  {s t : ChannelConfig C} {self x : Name}
  {body : Term (QubitPrimitive C)} {closureEnv : RuntimeEnv C}
  {arg : RuntimeValue C} {rest : EvalStack C}
  (h : ChannelInternalStep s t)
  (hc : s.control = .value arg)
  (hs : s.stack =
    .function (.recClosure self x body closureEnv) :: rest) :
  t = { s with

```

```

    control := .term body
    env :=
      RuntimeEnv.bind x arg
      (RuntimeEnv.bind self
        (.recClosure self x body closureEnv) closureEnv)
    stack := rest } := by
cases h with
| recBeta =>
  cases hc
  cases hs
  rfl
| evaluateArgument => cases hs
| beta => cases hs
| returnPrimitive => cases hc
| pauliXPrimitive => cases hc
| lambda => cases hc
| recursive => cases hc
| application => cases hc
| internalLeft => cases hc
| internalRight => cases hc
| ?variable? => cases hc

theorem ChannelInternalStep.eq_of_variable {C : Type}
  {s t : ChannelConfig C} {x : Name} {v : RuntimeValue C}
  (h : ChannelInternalStep s t)
  (hc : s.control = .term (.var x))
  (hlookup : RuntimeEnv.lookup x s.env = some v) :
  t = { s with control := .value v } := by
cases h <;> cases hc
* rename_i hlook
  rw [hlookup] at hlook
  injection hlook with hv
  subst hv
  rfl

theorem ChannelExternalStep.not_prim {C : Type}
  {s t : ChannelConfig C} {b : Bool} {p : QubitPrimitive C}
  (h : ChannelExternalStep s b t)
  (hc : s.control = .term (.prim p)) : False := by
cases h <;> cases hc

theorem ChannelExternalStep.not_intern {C : Type}
  {s t : ChannelConfig C} {b : Bool}
  {left right : Term (QubitPrimitive C)}
  (h : ChannelExternalStep s b t)
  (hc : s.control = .term (.intern left right)) : False := by
cases h <;> cases hc

theorem ChannelExternalStep.eq_of_extern {C : Type}
  {s t : ChannelConfig C} {b : Bool}
  {left right : Term (QubitPrimitive C)}
  (h : ChannelExternalStep s b t)
  (hc : s.control = .term (.extern left right)) :
  t = {s with control := .term (if b then right else left)} := by
cases h <;> cases hc <;> rfl

theorem ChannelExternalStep.not_value {C : Type}
  {s t : ChannelConfig C} {b : Bool} {v : RuntimeValue C}
  (h : ChannelExternalStep s b t)
  (hc : s.control = .value v) : False := by
cases h <;> cases hc

/-- Any completing channel tree from a closed return primitive embeds as

```



```

deterministic return of that payload. -/
theorem embed_of_ret_tree {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C → HSemanticValue D_0 j_0)
  (value : C) (quantum : NormalizedDensity 2)
  (tree : ChannelTree C
    (initialChannelConfig (.prim (.ret value)) quantum))
  (R : ChannelTreeRealization D_0 j_0 realize tree)
  (selectors : List Bool) (i : Nat) :
    embed (restrictedInstrument D_0 j_0 realize tree R selectors i) =
      embed (FiniteInstrumentComp.unit (n := 2) (realize value)) := by
have hctrl :
  (initialChannelConfig (.prim (.ret value)) quantum).control =
    .term (.prim (.ret value)) := rfl
have hstack :
  (initialChannelConfig (.prim (.ret value)) quantum).stack = [] := rfl
cases tree with
| terminal hterm =>
  have := hterm.control_eq
  simp [initialChannelConfig, ofConfig, initialConfig] at this
| internal h next =>
  have ht := ChannelInternalStep.eq_of_return h hctrl
  have hnextctrl := ht.1
  have hnextstack := ht.2.2.1.trans hstack
  cases next with
  | terminal hterm =>
    have hvalue : hterm.value = .payload value := by
      injection hterm.control_eq.symm.trans hnextctrl
    have hall : forall o, OutcomeCompatible
      (ChannelTree.internal h (ChannelTree.terminal hterm))
      selectors i o := by
      intro o
      simp [OutcomeCompatible, ChannelTree.instrument]
      exact List.nil_prefix
    rw [embed_restricted_of_all_compatible D_0 j_0 realize _ R
      selectors i hall]
    let ? := realizedInstrument D_0 j_0 realize
      (ChannelTree.internal h (ChannelTree.terminal hterm)) R
    let _ : Unique ?.Outcome :=
      { default := <<>, <>>
        uniq := by intro o; rcases o with <<>, <>>; rfl }
    refine embed_eq_unit_of_unique ? (realize value) ? _ ?_
  * intro o
    have hrel := R.related o
    have hpay :
      ((ChannelTree.internal h (ChannelTree.terminal hterm))
        .instrument.value o).isTerminal.value =
        .payload value := by
      simp [ChannelTree.instrument]
      exact hvalue
    rw [hpay] at hrel
    exact ValueRel.payload_eq D_0 j_0 hrel
  * intro o
    rcases o with <<>, <>>
    change KrausFamily.comp (KrausFamily.identity 2)
      (channelInternalOperation
        (initialChannelConfig (.prim (.ret value)) quantum)).kraus =
        KrausFamily.identity 2
    simp [channelInternalOperation, initialChannelConfig, ofConfig,
      initialConfig, QuantumOperation.identity]
| internal h' _ =>

```

```

    exact False.elim
      (ChannelInternalStep.not_value_nil h' hnextctrl
        (ht.2.2.1.trans hstack))
  | external _ h' _ =>
    exact False.elim (ChannelExternalStep.not_value h' hnextctrl)
  | probability _ _ _ => cases hnextctrl
  | probabilityZero _ => cases hnextctrl
  | probabilityOne _ => cases hnextctrl
  | measurement _ _ => cases hnextctrl
| external _ h _ =>
  exact False.elim (ChannelExternalStep.not_prim h hctrl)

theorem embed_of_pauliX_tree {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (value : C) (quantum : NormalizedDensity 2)
  (tree : ChannelTree C
    (initialChannelConfig (.prim (.pauliX value)) quantum))
  (R : ChannelTreeRealization D_0 j_0 realize tree)
  (selectors : List Bool) (i : Nat) :
  embed (restrictedInstrument D_0 j_0 realize tree R selectors i) =
    embed (FiniteInstrumentComp.ofOperation Qubit.pauliXOp
      (realize value)) := by
have hctrl :
  (initialChannelConfig (.prim (.pauliX value)) quantum).control =
    .term (.prim (.pauliX value)) := rfl
have hstack :
  (initialChannelConfig (.prim (.pauliX value)) quantum).stack = [] := rfl
cases tree with
| terminal hterm =>
  have := hterm.control_eq
  simp [initialChannelConfig, ofConfig, initialConfig] at this
| internal h next =>
  have ht := ChannelInternalStep.eq_of_pauliX h hctrl
  have hnextctrl := ht.1
  have hnextstack := ht.2.2.1.trans hstack
  cases next with
  | terminal hterm =>
    have hvalue : hterm.value = .payload value := by
      injection hterm.control_eq.symm.trans hnextctrl
    have hall : forall o, OutcomeCompatible
      (ChannelTree.internal h (ChannelTree.terminal hterm))
      selectors i o := by
      intro o
      simp [OutcomeCompatible, ChannelTree.instrument]
      exact List.nil_prefix
    rw [embed_restricted_of_all_compatible D_0 j_0 realize _ R
      selectors i hall]
    let ? := realizedInstrument D_0 j_0 realize
      (ChannelTree.internal h (ChannelTree.terminal hterm)) R
    let _ : Unique ?.Outcome :=
      { default := <<>, <>> }
    uniq := by intro o; rcases o with <<>, <>>; rfl }
    refine embed_eq_ofOperation_of_unique ? Qubit.pauliXOp
      (realize value) ?_ ?_
  * intro o
    have hrel := R.related o
    have hpay :
      ((ChannelTree.internal h (ChannelTree.terminal hterm))
        .instrument.value o).isTerminal.value =
        .payload value := by

```

```

    simp [ChannelTree.instrument]
    exact hvalue
  rw [hpay] at hrel
  exact ValueRel.payload_eq D_0 j_0 hrel
* intro o
  rcases o with <<>, <>>
  change KrausFamily.comp (KrausFamily.identity 2)
    (channelInternalOperation
      (initialChannelConfig (.prim (.pauliX value)) quantum)).kraus =
      Qubit.pauliXOp.kraus
  simp [channelInternalOperation, initialChannelConfig, ofConfig,
    initialConfig]
| internal h' _ =>
  exact False.elim
    (ChannelInternalStep.not_value_nil h' hnextctrl hnextstack)
| external _ h' _ =>
  exact False.elim (ChannelExternalStep.not_value h' hnextctrl)
| probability _ _ _ => cases hnextctrl
| probabilityZero _ => cases hnextctrl
| probabilityOne _ => cases hnextctrl
| measurement _ _ => cases hnextctrl
| external _ h _ =>
  exact False.elim (ChannelExternalStep.not_prim h hctrl)

/-- Any completing channel tree from a closed measure-Z primitive embeds as
the two-outcome computational-basis instrument. The start is generalized
first so indexed elimination can enter the measurement constructor. -/
theorem embed_of_measureZ_tree {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (zeroValue oneValue : C) (quantum : NormalizedDensity 2)
  (tree : ChannelTree C
    (initialChannelConfig (.prim (.measureZ zeroValue oneValue)) quantum))
  (R : ChannelTreeRealization D_0 j_0 realize tree)
  (selectors : List Bool) (i : Nat) :
  embed (restrictedInstrument D_0 j_0 realize tree R selectors i) =
    embed (Qubit.measureZComp.map
      (fun b => if b then realize oneValue else realize zeroValue)) := by
  revert tree R
  generalize hs : initialChannelConfig
    (.prim (.measureZ zeroValue oneValue)) quantum = s
  intro tree R
  have hctrl :
    s.control = .term (.prim (.measureZ zeroValue oneValue)) := by
    cases hs; rfl
  have hstack : s.stack = [] := by
    cases hs; rfl
  cases tree with
| terminal hterm =>
  have := hterm.control_eq.symm.trans hctrl
  cases this
| internal h next =>
  exact False.elim (ChannelInternalStep.not_measureZ h hctrl)
| external _ h _ =>
  exact False.elim (ChannelExternalStep.not_prim h hctrl)
| probability _ _ _ =>
  cases hctrl
| probabilityZero _ =>
  cases hctrl
| probabilityOne _ =>
  cases hctrl

```

```

| @measurement source z' o' zeroTree oneTree =>
  have hctrl0 :
    ({source with
      control := .value (.payload z')
      quantum := applyOperation (measurementOperation false)
      source.quantum}).control =
      .value (.payload z') := rfl
  have hstack0 :
    ({source with
      control := .value (.payload z')
      quantum := applyOperation (measurementOperation false)
      source.quantum}).stack = [] := hstack
  have hctrl1 :
    ({source with
      control := .value (.payload o')
      quantum := applyOperation (measurementOperation true)
      source.quantum}).control =
      .value (.payload o') := rfl
  have hstack1 :
    ({source with
      control := .value (.payload o')
      quantum := applyOperation (measurementOperation true)
      source.quantum}).stack = [] := hstack
  cases zeroTree with
  | terminal hz =>
    cases oneTree with
    | terminal ho =>
      have hval0 : hz.value = .payload z' :=
        (by injection hz.control_eq : _ = hz.value).symm
      have hval1 : ho.value = .payload o' :=
        (by injection ho.control_eq : _ = ho.value).symm
      have hzid : z' = zeroValue := by
        cases hctrl
        rfl

```

Lean 4 source (lines 2401–2800)

```

have hoid : o' = oneValue := by
  cases hctrl
  rfl
have hall : forall o, OutcomeCompatible
  (ChannelTree.measurement
    (ChannelTree.terminal hz) (ChannelTree.terminal ho))
  selectors i o := by
  intro o
  obtain <b, hb> := o
  cases b
  * cases hb
    simp [OutcomeCompatible, ChannelTree.instrument]
    exact List.nil_prefix
  * cases hb
    simp [OutcomeCompatible, ChannelTree.instrument]
    exact List.nil_prefix
rw [embed_restricted_of_all_compatible D_0 j_0 realize _ R
  selectors i hall]
let ? := realizedInstrument D_0 j_0 realize
  (ChannelTree.measurement
    (ChannelTree.terminal hz) (ChannelTree.terminal ho)) R
let ? := Qubit.measureZComp.map
  (fun b => if b then realize oneValue else realize zeroValue)
refine embed_congr_of_outcome_equiv ? ? ?e ?hbranch ?hvalue
* exact
  { toFun := fun o => o.1
    invFun := fun b =>

```

```

        match b with
        | true => <true, <>>
        | false => <false, <>>
    left_inv := by
        intro o
        obtain <b, hb> := o
        cases b <;> (cases hb; rfl)
    right_inv := by
        intro b
        cases b <;> rfl }
* intro o
  obtain <b, hb> := o
  cases b
* cases hb
  change Qubit.measureZComp.branch false =
    KrausFamily.comp (KrausFamily.identity 2)
    (Qubit.measureZComp.branch false)
  simp
* cases hb
  change Qubit.measureZComp.branch true =
    KrausFamily.comp (KrausFamily.identity 2)
    (Qubit.measureZComp.branch true)
  simp
* intro o
  obtain <b, hb> := o
  cases b
* cases hb
  have hrel := R.related <false, <>>
  have hpay :
    ((ChannelTree.measurement
      (ChannelTree.terminal hz)
      (ChannelTree.terminal ho)).instrument.value
      <false, <>>).isTerminal.value =
      .payload z' := by
    simp [ChannelTree.instrument]
    exact hval0
  rw [hpay] at hrel
  exact ((ValueRel.payload_eq D_0 j_0 hrel).trans
    (congrArg realize hzid)).symm
* cases hb
  have hrel := R.related <true, <>>
  have hpay :
    ((ChannelTree.measurement
      (ChannelTree.terminal hz)
      (ChannelTree.terminal ho)).instrument.value
      <true, <>>).isTerminal.value =
      .payload o' := by
    simp [ChannelTree.instrument]
    exact hval1
  rw [hpay] at hrel
  exact ((ValueRel.payload_eq D_0 j_0 hrel).trans
    (congrArg realize hoid)).symm
| internal h' _ =>
  exact False.elim
    (ChannelInternalStep.not_value_nil h' hctrl1 hstack1)
| external _ h' _ =>
  exact False.elim (ChannelExternalStep.not_value h' hctrl1)
| internal h' _ =>
  exact False.elim
    (ChannelInternalStep.not_value_nil h' hctrl0 hstack0)
| external _ h' _ =>
  exact False.elim (ChannelExternalStep.not_value h' hctrl0)

```

```

/-- Every completing tree for an internal choice of two closed returns chooses
exactly one side and embeds as that deterministic return. -/
theorem embed_of_intern_returns_tree {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (leftValue rightValue : C) (quantum : NormalizedDensity 2)
  (tree : ChannelTree C
    (initialChannelConfig
      (.intern (.prim (.ret leftValue)) (.prim (.ret rightValue))) quantum))
  (R : ChannelTreeRealization D_0 j_0 realize tree)
  (selectors : List Bool) (i : Nat) :
  embed (restrictedInstrument D_0 j_0 realize tree R selectors i) =
    embed (FiniteInstrumentComp.unit (n := 2) (realize leftValue)) \ /
    embed (restrictedInstrument D_0 j_0 realize tree R selectors i) =
    embed (FiniteInstrumentComp.unit (n := 2) (realize rightValue)) := by
let start := initialChannelConfig
  (.intern (.prim (.ret leftValue)) (.prim (.ret rightValue))) quantum
have hctrl : start.control =
  .term (.intern (.prim (.ret leftValue)) (.prim (.ret rightValue))) := rfl
have hstack : start.stack = [] := rfl
dsimp [start] at tree hctrl hstack
cases tree with
| terminal hterm =>
  have := hterm.control_eq.symm.trans hctrl
  cases this
| @internal _ target h next =>
  rcases ChannelInternalStep.eq_of_intern h hctrl with ht | ht
  * left
  subst target
  have hnextctrl :
    ({start with control := .term (.prim (.ret leftValue))}).control =
    .term (.prim (.ret leftValue)) := rfl
  cases next with
  | terminal hterm =>
    have := hterm.control_eq.symm.trans hnextctrl
    cases this
  | internal hret final =>
    have hr := ChannelInternalStep.eq_of_return hret hnextctrl
    have hfinalctrl := hr.1
    have hfinalstack := hr.2.2.1.trans hstack
    cases final with
    | terminal hterm =>
      have hvalue : hterm.value = .payload leftValue := by
        injection hterm.control_eq.symm.trans hfinalctrl
      have hall : forall o, OutcomeCompatible
        (ChannelTree.internal h
          (ChannelTree.internal hret (ChannelTree.terminal hterm)))
        selectors i o := by
        intro o
        rcases o with <<>, <<>, <>>>
        simp [OutcomeCompatible, ChannelTree.instrument]
        exact List.nil_prefix
      rw [embed_restricted_of_all_compatible D_0 j_0 realize _ R
        selectors i hall]
      let ? := realizedInstrument D_0 j_0 realize
        (ChannelTree.internal h
          (ChannelTree.internal hret (ChannelTree.terminal hterm))) R
      let _ : Unique ?.Outcome :=
        { default := <<>, <<>, <>>>
        uniq := by
          intro o

```

```

      rcases o with <<>, <<>, <>>>
      rfl }
refine embed_eq_unit_of_unique ? (realize leftValue) ?_ ?_
* intro o
  have hrel := R.related o
  have hpay :
    ((ChannelTree.internal h
      (ChannelTree.internal hret
        (ChannelTree.terminal hterm))).instrument.value o
      ).isTerminal.value = .payload leftValue := by
    simp [ChannelTree.instrument]
  exact hvalue
  rw [hpay] at hrel
  exact ValueRel.payload_eq D_0 j_0 hrel
* intro o
  rcases o with <<>, <<>, <>>>
  change
    KrausFamily.comp
    (KrausFamily.comp (KrausFamily.identity 2)
      (QuantumOperation.identity 2).kraus)
    (QuantumOperation.identity 2).kraus =
    KrausFamily.identity 2
  simp [QuantumOperation.identity]
| internal h' _ =>
  exact False.elim
    (ChannelInternalStep.not_value_nil h' hfinalctrl hfinalstack)
| external _ h' _ =>
  exact False.elim (ChannelExternalStep.not_value h' hfinalctrl)
| probability _ _ _ => cases hfinalctrl
| probabilityZero _ => cases hfinalctrl
| probabilityOne _ => cases hfinalctrl
| measurement _ _ => cases hfinalctrl
| external _ h' _ =>
  exact False.elim (ChannelExternalStep.not_prim h' hnextctrl)
* right
subst target
have hnextctrl :
  ({start with control := .term (.prim (.ret rightValue))}).control =
  .term (.prim (.ret rightValue)) := rfl
cases next with
| terminal hterm =>
  have := hterm.control_eq.symm.trans hnextctrl
  cases this
| internal hret final =>
  have hr := ChannelInternalStep.eq_of_return hret hnextctrl
  have hfinalctrl := hr.1
  have hfinalstack := hr.2.2.1.trans hstack
  cases final with
  | terminal hterm =>
    have hvalue : hterm.value = .payload rightValue := by
      injection hterm.control_eq.symm.trans hfinalctrl
    have hall : forall o, OutcomeCompatible
      (ChannelTree.internal h
        (ChannelTree.internal hret (ChannelTree.terminal hterm)))
    selectors i o := by
      intro o
      rcases o with <<>, <<>, <>>>
      simp [OutcomeCompatible, ChannelTree.instrument]
      exact List.nil_prefix
  rw [embed_restricted_of_all_compatible D_0 j_0 realize _ R
    selectors i hall]
  let ? := realizedInstrument D_0 j_0 realize
    (ChannelTree.internal h

```

```

      (ChannelTree.internal hret (ChannelTree.terminal hterm))) R
let _ : Unique ?.Outcome :=
  { default := <<>, <<>, <>>>
    uniq := by
      intro o
      rcases o with <<>, <<>, <>>>
      rfl }
refine embed_eq_unit_of_unique ? (realize rightValue) ?_ ?_
* intro o
  have hrel := R.related o
  have hpay :
    ((ChannelTree.internal h
      (ChannelTree.internal hret
        (ChannelTree.terminal hterm))).instrument.value o
      ).isTerminal.value = .payload rightValue := by
      simp [ChannelTree.instrument]
      exact hvalue
  rw [hpay] at hrel
  exact ValueRel.payload_eq D_0 j_0 hrel
* intro o
  rcases o with <<>, <<>, <>>>
  change
    KrausFamily.comp
      (KrausFamily.comp (KrausFamily.identity 2)
        (QuantumOperation.identity 2).kraus)
      (QuantumOperation.identity 2).kraus =
        KrausFamily.identity 2
  simp [QuantumOperation.identity]
| internal h' _ =>
  exact False.elim
    (ChannelInternalStep.not_value_nil h' hfinalctrl hfinalstack)
| external _ h' _ =>
  exact False.elim (ChannelExternalStep.not_value h' hfinalctrl)
| probability _ _ _ => cases hfinalctrl
| probabilityZero _ => cases hfinalctrl
| probabilityOne _ => cases hfinalctrl
| measurement _ _ => cases hfinalctrl
| external _ h' _ =>
  exact False.elim (ChannelExternalStep.not_prim h' hnextctrl)
| external _ h _ =>
  exact False.elim (ChannelExternalStep.not_intern h hctrl)

/-- Closed return primitives satisfy channel-tree completeness exactly. -/
theorem return_channelTreeCompleteness {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (value : C) (quantum : NormalizedDensity 2)
  (semanticEnv : Env (HSemanticValue D_0 j_0)) :
  ChannelTreeCompleteness D_0 j_0 realize
    (initialChannelConfig (.prim (.ret value)) quantum)
    (interp (hardwarePrimitive D_0 j_0 realize)
      (.prim (.ret value)) semanticEnv) where
selected_result_eq_channelTree_sup := by
  intro selectors i k
  have hdenote :
    interp (hardwarePrimitive D_0 j_0 realize)
      (.prim (.ret value)) semanticEnv =
      taggedEmbed (FiniteInstrumentComp.unit (n := 2) (realize value)) := by
    simp [hardwarePrimitive_ret, taggedEmbed_unit]
  rw [hdenote, selectPath_taggedEmbed, taggedEmbed_apply]
  refine le_antisymm ?_ ?_

```



```

* apply le_sSup
  refine <1, returnTree value quantum,
    returnTreeRealization D_0 j_0 realize value quantum, ?_, ?_>
* simp [returnTree_depth]
* rw [restrictedResult_eq_embed D_0 j_0 realize
  (returnTree value quantum)
  (returnTreeRealization D_0 j_0 realize value quantum)
  selectors i k
  (by simp [ResultAvailable, resultAvailableAt, returnTree]),
  embed_restricted_of_all_compatible D_0 j_0 realize
  (returnTree value quantum)
  (returnTreeRealization D_0 j_0 realize value quantum)
  selectors i (returnTree_compatible value quantum selectors i),
  returnTree_realized_eq_unit]
* apply sSup_le
  rintro T <_, tree, R, _, rfl>
  exact (restrictedResult_le_embed D_0 j_0 realize tree R selectors i k).trans_eq
    (congrArg (fun f => f k)
      (embed_of_ret_tree D_0 j_0 realize value quantum tree R selectors i))

/-- Closed Pauli-X primitives satisfy channel-tree completeness exactly. -/
theorem pauliX_channelTreeCompleteness {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (value : C) (quantum : NormalizedDensity 2)
  (semanticEnv : Env (HSemanticValue D_0 j_0)) :
  ChannelTreeCompleteness D_0 j_0 realize
    (initialChannelConfig (.prim (.pauliX value)) quantum)
    (interp (hardwarePrimitive D_0 j_0 realize)
      (.prim (.pauliX value)) semanticEnv) where
  selected_result_eq_channelTree_sup := by
    intro selectors i k
    have hdenote :
      interp (hardwarePrimitive D_0 j_0 realize)
        (.prim (.pauliX value)) semanticEnv =
      taggedEmbed (FiniteInstrumentComp.ofOperation Qubit.pauliXOp
        (realize value)) := by
      simp [hardwarePrimitive_pauliX]
    rw [hdenote, selectPath_taggedEmbed, taggedEmbed_apply]
    refine le_antisymm ?_ ?_
* apply le_sSup
  refine <1, pauliXTree value quantum,
    pauliXTreeRealization D_0 j_0 realize value quantum, ?_, ?_>
* simp [pauliXTree_depth]
* rw [restrictedResult_eq_embed D_0 j_0 realize
  (pauliXTree value quantum)
  (pauliXTreeRealization D_0 j_0 realize value quantum)
  selectors i k
  (by simp [ResultAvailable, resultAvailableAt, pauliXTree]),
  embed_restricted_of_all_compatible D_0 j_0 realize
  (pauliXTree value quantum)
  (pauliXTreeRealization D_0 j_0 realize value quantum)
  selectors i (pauliXTree_compatible value quantum selectors i),
  pauliXTree_realized_eq_ofOperation]
* apply sSup_le
  rintro T <_, tree, R, _, rfl>
  exact (restrictedResult_le_embed D_0 j_0 realize tree R selectors i k).trans_eq
    (congrArg (fun f => f k)
      (embed_of_pauliX_tree D_0 j_0 realize value quantum tree R selectors i))

/-- Closed measure-Z primitives satisfy channel-tree completeness exactly. -/

```

```

theorem measureZ_channelTreeCompleteness {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C → HSemanticValue D_0 j_0)
  (zeroValue oneValue : C) (quantum : NormalizedDensity 2)
  (semanticEnv : Env (HSemanticValue D_0 j_0)) :
  ChannelTreeCompleteness D_0 j_0 realize
    (initialChannelConfig (.prim (.measureZ zeroValue oneValue)) quantum)
    (interp (hardwarePrimitive D_0 j_0 realize)
      (.prim (.measureZ zeroValue oneValue)) semanticEnv) where
selected_result_eq_channelTree_sup := by
  intro selectors i k
  have hdenote :
    interp (hardwarePrimitive D_0 j_0 realize)
      (.prim (.measureZ zeroValue oneValue)) semanticEnv =
      taggedEmbed (Qubit.measureZComp.map
        (fun b => if b then realize oneValue else realize zeroValue)) := by
    simp [hardwarePrimitive_measureZ]
  rw [hdenote, selectPath_taggedEmbed, taggedEmbed_apply]
  refine le_antisymm ?_ ?_
  * apply le_sSup
    refine <1, measurementTree zeroValue oneValue quantum,
      measurementTreeRealization D_0 j_0 realize zeroValue oneValue quantum,
        ?_, ?_>
  * simp [measurementTree_depth]
  * rw [restrictedResult_eq_embed D_0 j_0 realize
    (measurementTree zeroValue oneValue quantum)
    (measurementTreeRealization D_0 j_0 realize
      zeroValue oneValue quantum)
    selectors i k
    (by simp [ResultAvailable, resultAvailableAt, measurementTree]),
    embed_restricted_of_all_compatible D_0 j_0 realize
    (measurementTree zeroValue oneValue quantum)
    (measurementTreeRealization D_0 j_0 realize
      zeroValue oneValue quantum)
    selectors i
    (measurementTree_compatible zeroValue oneValue quantum
      selectors i),
    measurementTree_realized_eq_measureZ]
  * apply sSup_le
    rintro T <_, tree, R, _, rfl>
    exact (restrictedResult_le_embed D_0 j_0 realize tree R selectors i k).trans_eq
      (congrArg (fun f => f k)
        (embed_of_measureZ_tree D_0 j_0 realize zeroValue oneValue quantum
          tree R selectors i))

/-- A closed internal choice between two returns is the supremum of its two
one-sided completing channel trees. -/
theorem intern_returns_channelTreeCompleteness {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C → HSemanticValue D_0 j_0)
  (leftValue rightValue : C) (quantum : NormalizedDensity 2)
  (semanticEnv : Env (HSemanticValue D_0 j_0)) :
  ChannelTreeCompleteness D_0 j_0 realize
    (initialChannelConfig
      (.intern (.prim (.ret leftValue)) (.prim (.ret rightValue))) quantum)
    (interp (hardwarePrimitive D_0 j_0 realize)
      (.intern (.prim (.ret leftValue)) (.prim (.ret rightValue))))

```

Lean 4 source (lines 2801–3200)

```

      (.intern (.prim (.ret leftValue)) (.prim (.ret rightValue))) quantum)
    (interp (hardwarePrimitive D_0 j_0 realize)
      (.intern (.prim (.ret leftValue)) (.prim (.ret rightValue))))

```

```

    semanticEnv) where
selected_result_eq_channelTree_sup := by
  intro selectors i k
  let leftResult :=
    embed (FiniteInstrumentComp.unit (n := 2) (realize leftValue)) k
  let rightResult :=
    embed (FiniteInstrumentComp.unit (n := 2) (realize rightValue)) k
  have hselected :
    HardwareAdequacy.selectPath selectors
      (interp (hardwarePrimitive D_0 j_0 realize)
        (.intern (.prim (.ret leftValue)) (.prim (.ret rightValue))))
        semanticEnv) i k =
    leftResult sqsup rightResult := by
  rw [interp_intern_apply, HardwareAdequacy.selectPath_apply_encode,
    TTContinuation.computation_intern_apply,
    TTContinuation.internalChoice_apply, interp_prim_apply,
    interp_prim_apply, hardwarePrimitive_ret, hardwarePrimitive_ret]
  rw [ <- taggedEmbed_unit (n := 2) (realize leftValue),
    <- taggedEmbed_unit (n := 2) (realize rightValue)]
  rfl
rw [hselected]
refine le_antisymm ?_ ?_
* apply sup_le
* apply le_sSup
  refine <2, internReturnLeftTree leftValue rightValue quantum,
    internReturnLeftTreeRealization D_0 j_0 realize
    leftValue rightValue quantum, ?_, ?_>
* simp [internReturnLeftTree_depth]
* rw [restrictedResult_eq_embed D_0 j_0 realize
  (internReturnLeftTree leftValue rightValue quantum)
  (internReturnLeftTreeRealization D_0 j_0 realize
    leftValue rightValue quantum)
  selectors i k
  (by simp [ResultAvailable, resultAvailableAt,
    internReturnLeftTree, returnTree]),
  embed_restricted_of_all_compatible D_0 j_0 realize
  (internReturnLeftTree leftValue rightValue quantum)
  (internReturnLeftTreeRealization D_0 j_0 realize
    leftValue rightValue quantum)
  selectors i
  (internReturnLeftTree_compatible leftValue rightValue quantum
    selectors i),
  internReturnLeftTree_realized_eq_unit]
* apply le_sSup
  refine <2, internReturnRightTree leftValue rightValue quantum,
    internReturnRightTreeRealization D_0 j_0 realize
    leftValue rightValue quantum, ?_, ?_>
* simp [internReturnRightTree_depth]
* rw [restrictedResult_eq_embed D_0 j_0 realize
  (internReturnRightTree leftValue rightValue quantum)
  (internReturnRightTreeRealization D_0 j_0 realize
    leftValue rightValue quantum)
  selectors i k
  (by simp [ResultAvailable, resultAvailableAt,
    internReturnRightTree, returnTree]),
  embed_restricted_of_all_compatible D_0 j_0 realize
  (internReturnRightTree leftValue rightValue quantum)
  (internReturnRightTreeRealization D_0 j_0 realize
    leftValue rightValue quantum)
  selectors i
  (internReturnRightTree_compatible leftValue rightValue quantum
    selectors i),
  internReturnRightTree_realized_eq_unit]

```

```

* apply sSup_le
rintro T <_, tree, R, _, rfl>
rcases embed_of_intern_returns_tree D_0 j_0 realize
  leftValue rightValue quantum tree R selectors i with hleft | hright
* exact (restrictedResult_le_embed D_0 j_0 realize tree R selectors i k).trans
  ((congrArg (fun f => f k) hleft).le.trans le_sup_left)
* exact (restrictedResult_le_embed D_0 j_0 realize tree R selectors i k).trans
  ((congrArg (fun f => f k) hright).le.trans le_sup_right)

/-- The first intern step is a classical identity operation. -/
theorem channelInternalOperation_intern {C : Type}
  (left right : Term (QubitPrimitive C))
  (quantum : NormalizedDensity 2) :
  channelInternalOperation
    (initialChannelConfig (.intern left right) quantum) =
    QuantumOperation.identity 2 :=
  rfl

theorem initialChannelConfig_intern_left {C : Type}
  (left right : Term (QubitPrimitive C))
  (quantum : NormalizedDensity 2) :
  { initialChannelConfig (.intern left right) quantum with
    control := .term left } =
  initialChannelConfig left quantum :=
  rfl

theorem initialChannelConfig_intern_right {C : Type}
  (left right : Term (QubitPrimitive C))
  (quantum : NormalizedDensity 2) :
  { initialChannelConfig (.intern left right) quantum with
    control := .term right } =
  initialChannelConfig right quantum :=
  rfl

/-- Wrap a completed left child as one intern branch. -/
def wrapInternLeft {C : Type}
  (left right : Term (QubitPrimitive C))
  (quantum : NormalizedDensity 2)
  (child : ChannelTree C (initialChannelConfig left quantum)) :
  ChannelTree C (initialChannelConfig (.intern left right) quantum) :=
  ChannelTree.internal
    (ChannelInternalStep.internalLeft
      (s := initialChannelConfig (.intern left right) quantum))
    child

/-- Wrap a completed right child as one intern branch. -/
def wrapInternRight {C : Type}
  (left right : Term (QubitPrimitive C))
  (quantum : NormalizedDensity 2)
  (child : ChannelTree C (initialChannelConfig right quantum)) :
  ChannelTree C (initialChannelConfig (.intern left right) quantum) :=
  ChannelTree.internal
    (ChannelInternalStep.internalRight
      (s := initialChannelConfig (.intern left right) quantum))
    child

theorem wrapInternLeft_depth {C : Type}
  (left right : Term (QubitPrimitive C))
  (quantum : NormalizedDensity 2)
  (child : ChannelTree C (initialChannelConfig left quantum)) :
  (wrapInternLeft left right quantum child).depth = child.depth + 1 :=
  rfl

```

```

theorem wrapInternRight_depth {C : Type}
  (left right : Term (QubitPrimitive C))
  (quantum : NormalizedDensity 2)
  (child : ChannelTree C (initialChannelConfig right quantum)) :
  (wrapInternRight left right quantum child).depth = child.depth + 1 :=
  rfl

/-- Drop the administrative intern node from a realization. -/
noncomputable def internalChildRealization {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C → HSemanticValue D_0 j_0)
  {s t : ChannelConfig C} (h : ChannelInternalStep s t)
  (next : ChannelTree C t)
  (R : ChannelTreeRealization D_0 j_0 realize (ChannelTree.internal h next)) :
  ChannelTreeRealization D_0 j_0 realize next where
  value := R.value
  related := fun o => R.related <<>, o>

/-- Lift a child realization across an administrative intern node. -/
noncomputable def wrapInternalRealization {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C → HSemanticValue D_0 j_0)
  {s t : ChannelConfig C} (h : ChannelInternalStep s t)
  (next : ChannelTree C t)
  (R : ChannelTreeRealization D_0 j_0 realize next) :
  ChannelTreeRealization D_0 j_0 realize (ChannelTree.internal h next) where
  value := R.value
  related := fun p => R.related p.2

/-- An identity internal step is only a unit-sigma reindexing of outcomes. -/
theorem embed_restricted_internal_of_identity {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C → HSemanticValue D_0 j_0)
  {s t : ChannelConfig C} (h : ChannelInternalStep s t)
  (hop : channelInternalOperation s = QuantumOperation.identity 2)
  (next : ChannelTree C t)
  (R : ChannelTreeRealization D_0 j_0 realize (ChannelTree.internal h next))
  (selectors : List Bool) (i : Nat) :
  embed (restrictedInstrument D_0 j_0 realize
    (ChannelTree.internal h next) R selectors i) =
    embed (restrictedInstrument D_0 j_0 realize next
      (internalChildRealization D_0 j_0 realize h next R) selectors i) := by
  let ? := restrictedInstrument D_0 j_0 realize
    (ChannelTree.internal h next) R selectors i
  let ? := restrictedInstrument D_0 j_0 realize next
    (internalChildRealization D_0 j_0 realize h next R) selectors i
  refine embed_congr_of_outcome_equiv ? ? ?e ?hbranch ?hvalue
  * exact
    { toFun := fun p => <p.1.2, p.2>
      invFun := fun q => <<<>, q.1>, q.2>
      left_inv := by
        intro p
        rcases p with <<<>, o>, hp>
        rfl
      right_inv := by
        intro q
        rcases q with <o, ho>

```

```

      rfl }
* intro p
  change next.instrument.branch p.1.2 =
    KrausFamily.comp (next.instrument.branch p.1.2)
      (channelInternalOperation s).kraus
  rw [hop]
  simp [QuantumOperation.identity]
* intro p
  rfl

theorem restrictedResult_internal_of_identity {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s t : ChannelConfig C} (h : ChannelInternalStep s t)
  (hop : channelInternalOperation s = QuantumOperation.identity 2)
  (next : ChannelTree C t)
  (R : ChannelTreeRealization D_0 j_0 realize (ChannelTree.internal h next))
  (selectors : List Bool) (i : Nat)
  (k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)) :
  restrictedResult D_0 j_0 realize
    (ChannelTree.internal h next) R selectors i k =
    restrictedResult D_0 j_0 realize next
      (internalChildRealization D_0 j_0 realize h next R) selectors i k := by
classical
let childR := internalChildRealization D_0 j_0 realize h next R
have havail_iff :
  ResultAvailable (ChannelTree.internal h next) selectors i <=>
    ResultAvailable next selectors i := by
  rfl
by_cases havail :
  ResultAvailable (ChannelTree.internal h next) selectors i
* rw [restrictedResult_eq_embed D_0 j_0 realize
  (ChannelTree.internal h next) R selectors i k havail,
  restrictedResult_eq_embed D_0 j_0 realize next childR selectors i k
  (havail_iff.mp havail),
  embed_restricted_internal_of_identity D_0 j_0 realize h hop next R
  selectors i]
* have hunavailableChild : not ResultAvailable next selectors i :=
  fun hc => havail (havail_iff.mpr hc)
rw [restrictedResult_eq_bot D_0 j_0 realize
  (ChannelTree.internal h next) R selectors i k havail,
  restrictedResult_eq_bot D_0 j_0 realize next childR selectors i k
  hunavailableChild]

/-- An internal step embeds as its declared operation bound to the restricted
child. Identity is the special case whose Kraus family is absorbed. -/
theorem embed_restricted_internal {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s t : ChannelConfig C} (h : ChannelInternalStep s t)
  (next : ChannelTree C t)
  (R : ChannelTreeRealization D_0 j_0 realize (ChannelTree.internal h next))
  (selectors : List Bool) (i : Nat) :
  embed (restrictedInstrument D_0 j_0 realize
    (ChannelTree.internal h next) R selectors i) =
  embed
    ((FiniteInstrumentComp.ofOperation
      (channelInternalOperation s) ()).bind
      (fun _ =>

```

```

        restrictedInstrument D_0 j_0 realize next
        (internalChildRealization D_0 j_0 realize h next R)
        selectors i)) := by
let ? := restrictedInstrument D_0 j_0 realize
  (ChannelTree.internal h next) R selectors i
let childR := internalChildRealization D_0 j_0 realize h next R
let ? :=
  (FiniteInstrumentComp.ofOperation
    (channelInternalOperation s) ()).bind
  (fun _ =>
    restrictedInstrument D_0 j_0 realize next childR selectors i)
refine embed_congr_of_outcome_equiv ? ? ?e ?hbranch ?hvalue
* exact
  { toFun := fun p => <<>, <p.1.2, p.2>>
    invFun := fun q => <<<>, q.2.1>, q.2.2>
    left_inv := by
      intro p
      rcases p with <<<>, o>, hp>
      rfl
    right_inv := by
      intro q
      rcases q with <<>, <o, ho>>
      rfl }
* intro p
  rfl
* intro p
  rfl

theorem ChannelInternalStep.eq_config_of_pauliX {C : Type}
  {s t : ChannelConfig C} {value : C}
  (h : ChannelInternalStep s t)
  (hc : s.control = .term (.prim (.pauliX value))) :
  t = {s with
    control := .value (.payload value)
    quantum := applyOperation Qubit.pauliXOp s.quantum} := by
have ht := ChannelInternalStep.eq_of_pauliX h hc
apply ChannelConfig.ext
* exact ht.1
* exact ht.2.1
* exact ht.2.2.1
* exact ht.2.2.2

/-- The Pauli-X embedding reads the result continuation only at the
returned payload. -/
theorem embed_ofOperation_eval {n : Nat} {D : Type} [CompleteLattice D]
  (? : QuantumOperation n n) (d : D)
  (k : ScottMap D (TTContinuation.TTResult n)) :
  embed (FiniteInstrumentComp.ofOperation ? d) k =
    embed (FiniteInstrumentComp.ofOperation ? d)
      (ScottMap.const (k d)) := by
apply RoundedTheory.ext
ext t
constructor
* intro ht
  obtain <sources, hsources, target, hderives, htt> :=
    (TTTokenTheory.mem_aggregateResult
      (FiniteInstrumentComp.ofOperation ? d) k t).mp (by
        simpa [embed] using ht)
  apply (TTTokenTheory.mem_aggregateResult
    (FiniteInstrumentComp.ofOperation ? d)
    (ScottMap.const (k d)) t).2
  refine <sources, ?, target, hderives, htt>
  intro o

```

```

    exact hsources o
* intro ht
obtain <sources, hsources, target, hderives, htt> :=
  (TTTokenTheory.mem_aggregateResult
    (FiniteInstrumentComp.ofOperation ? d)
    (ScottMap.const (k d)) t).mp (by
    simpa [embed] using ht)
apply (TTTokenTheory.mem_aggregateResult
  (FiniteInstrumentComp.ofOperation ? d) k t).2
refine <sources, ?_, target, hderives, htt>
intro o
exact hsources o

/-- Evaluating a Pauli-X embedding at a lattice supremum of result
theories is the supremum of the pointwise evaluations. -/
theorem embed_ofOperation_const_sSup {n : Nat} {D : Type}
  [CompleteLattice D]
  (? : QuantumOperation n n) (d : D)
  (S : Set (TTContinuation.TTResult n)) :
  embed (FiniteInstrumentComp.ofOperation ? d)
    (ScottMap.const (sSup S)) =
    sSup ((fun r =>
      embed (FiniteInstrumentComp.ofOperation ? d)
        (ScottMap.const r)) ' S) := by
  apply RoundedTheory.ext
ext t
constructor
* intro ht
obtain <sources, hsources, target, hderives, htt> :=
  (TTTokenTheory.mem_aggregateResult
    (FiniteInstrumentComp.ofOperation ? d)
    (ScottMap.const (sSup S) : ScottMap D (TTContinuation.TTResult n)) t).mp (by
    simpa [embed] using ht)
have hmem : sources () in (sSup S : TTContinuation.TTResult n) :=
  hsources ()
change sources () in
  (sSup S : TTContinuation.TTResult n) at hmem
rw [RoundedTheory.mem_sSup] at hmem
obtain <r, hrS, hsr> := hmem
change t in
  (sSup ((fun r =>
    embed (FiniteInstrumentComp.ofOperation ? d)
      (ScottMap.const r)) ' S) : TTContinuation.TTResult n)
rw [RoundedTheory.mem_sSup]
refine <embed (FiniteInstrumentComp.ofOperation ? d)
  (ScottMap.const r : ScottMap D (TTContinuation.TTResult n)),
  <r, hrS, rfl>, ?_>
apply (TTTokenTheory.mem_aggregateResult
  (FiniteInstrumentComp.ofOperation ? d)
  (ScottMap.const r : ScottMap D (TTContinuation.TTResult n)) t).2
refine <sources, ?_, target, hderives, htt>
intro o
exact hsr
* intro ht
change t in
  (sSup ((fun r =>
    embed (FiniteInstrumentComp.ofOperation ? d)
      (ScottMap.const r)) ' S) : TTContinuation.TTResult n) at ht
rw [RoundedTheory.mem_sSup] at ht
obtain <T, <r, hrS, rfl>, htT> := ht
obtain <sources, hsources, target, hderives, htt> :=
  (TTTokenTheory.mem_aggregateResult
    (FiniteInstrumentComp.ofOperation ? d)

```



```

      (ScottMap.const r : ScottMap D (TTContinuation.TTResult n)) t).mp
      (by simpa [embed] using htT)
    apply (TTTokenTheory.mem_aggregateResult
      (FiniteInstrumentComp.ofOperation ? d)
      (ScottMap.const (sSup S) : ScottMap D (TTContinuation.TTResult n)) t).2
  refine <sources, ?_, target, hderives, htt>
  intro o
  change sources o in (sSup S : TTContinuation.TTResult n)
  rw [RoundedTheory.mem_sSup]
  exact <r, hrS, hsources o>

theorem embed_ofOperation_const_bot {n : Nat} {D : Type}
  [CompleteLattice D]
  (? : QuantumOperation n n) (d : D) :
  embed (FiniteInstrumentComp.ofOperation ? d)
    (ScottMap.const (False : TTContinuation.TTResult n)) = False := by
  apply RoundedTheory.ext
  ext t
  constructor

```

Lean 4 source (lines 3201–3600)

```

* intro ht
  obtain <sources, hsources, _, _, _> :=
    (TTTokenTheory.mem_aggregateResult
      (FiniteInstrumentComp.ofOperation ? d)
      (ScottMap.const (False : TTContinuation.TTResult n) :
        ScottMap D (TTContinuation.TTResult n)) t).mp (by
      simpa [embed] using ht)
  have hbot : sources () in
    (sSup ({ : Set (TTContinuation.TTResult n)) :
      TTContinuation.TTResult n) := by
      simpa [sSup_empty] using hsources ()
  rw [RoundedTheory.mem_sSup] at hbot
  obtain <_, hempty, _> := hbot
  exact False.elim hempty

* intro ht
  have hbot : t in
    (sSup ({ : Set (TTContinuation.TTResult n)) :
      TTContinuation.TTResult n) := by
      simpa [sSup_empty] using ht
  rw [RoundedTheory.mem_sSup] at hbot
  obtain <_, hempty, _> := hbot
  exact False.elim hempty

theorem selectPath_intern {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (left right : Term (QubitPrimitive C))
  (semanticEnv : Env (HSemanticValue D_0 j_0))
  (selectors : List Bool) (i : Nat)
  (k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)) :
  HardwareAdequacy.selectPath selectors
    (interp (hardwarePrimitive D_0 j_0 realize) (.intern left right)
      semanticEnv) i k =
  HardwareAdequacy.selectPath selectors
    (interp (hardwarePrimitive D_0 j_0 realize) left semanticEnv) i k sqsup
  HardwareAdequacy.selectPath selectors
    (interp (hardwarePrimitive D_0 j_0 realize) right semanticEnv) i k := by
  rw [interp_intern_apply, HardwareAdequacy.selectPath_apply_encode,
    TTContinuation.computation_intern_apply,
    TTContinuation.internalChoice_apply, HardwareAdequacy.selectPath_apply_encode,

```

```

HardwareAdequacy.selectPath_apply_encode]

/-- Internal choice of any two related computations is the join of their
selected results, independently of how those computations were obtained. -/
theorem selectPath_computation_intern
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEnternalContinuationPower 2)) D_0.carrier))
  (q r : HSemanticComp D_0 j_0)
  (selectors : List Bool) (i : Nat)
  (k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)) :
  HardwareAdequacy.selectPath selectors
    (HasComputationChoice.intern (q, r)) i k =
    HardwareAdequacy.selectPath selectors q i k sqsup
    HardwareAdequacy.selectPath selectors r i k := by
rw [HardwareAdequacy.selectPath_apply_encode,
  TTContinuation.computation_intern_apply,
  TTContinuation.internalChoice_apply,
  HardwareAdequacy.selectPath_apply_encode,
  HardwareAdequacy.selectPath_apply_encode]

theorem selectPath_computation_prob
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEnternalContinuationPower 2)) D_0.carrier))
  (p : Prob) (q r : HSemanticComp D_0 j_0)
  (selectors : List Bool) (i : Nat)
  (k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)) :
  HardwareAdequacy.selectPath selectors
    (HasComputationChoice.prob p (q, r)) i k =
    TTContinuation.probChoice p
    (HardwareAdequacy.selectPath selectors q i,
    HardwareAdequacy.selectPath selectors r i) k := by
rw [HardwareAdequacy.selectPath_apply_encode,
  TTContinuation.computation_prob_apply,
  HardwareAdequacy.selectPath_apply_encode,
  HardwareAdequacy.selectPath_apply_encode,
  TTContinuation.probChoice_apply]

/-- Internal choice of any two completed closed terms is the join of their
channel-tree suprema. -/
theorem intern_channelTreeCompleteness {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEnternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (left right : Term (QubitPrimitive C))
  (quantum : NormalizedDensity 2)
  (semanticEnv : Env (HSemanticValue D_0 j_0))
  (hleft : ChannelTreeCompleteness D_0 j_0 realize
    (initialChannelConfig left quantum)
    (interp (hardwarePrimitive D_0 j_0 realize) left semanticEnv))
  (hright : ChannelTreeCompleteness D_0 j_0 realize
    (initialChannelConfig right quantum)
    (interp (hardwarePrimitive D_0 j_0 realize) right semanticEnv)) :
  ChannelTreeCompleteness D_0 j_0 realize
    (initialChannelConfig (.intern left right) quantum)
    (interp (hardwarePrimitive D_0 j_0 realize) (.intern left right)
    semanticEnv) where
selected_result_eq_channelTree_sup := by
intro selectors i k
rw [selectPath_intern, hleft.selected_result_eq_channelTree_sup,
  hright.selected_result_eq_channelTree_sup]

```

```

refine le_antisymm ?_ ?_
* apply sup_le
* apply sSup_le
  rintro T <fuel, child, R, hdepth, rfl>
  apply le_sSup
  refine <fuel + 1,
    wrapInternLeft left right quantum child,
    wrapInternalRealization D_0 j_0 realize
      (ChannelInternalStep.internalLeft
        (s := initialChannelConfig (.intern left right) quantum)
        (left := left) (right := right))
    child R,
    ?_, ?_>
* simp [wrapInternLeft_depth] using Nat.succ_le_succ hdepth
* exact
  (restrictedResult_internal_of_identity D_0 j_0 realize
    (ChannelInternalStep.internalLeft
      (s := initialChannelConfig (.intern left right) quantum)
      (left := left) (right := right))
    (channelInternalOperation_intern left right quantum)
    child
    (wrapInternalRealization D_0 j_0 realize
      (ChannelInternalStep.internalLeft
        (s := initialChannelConfig (.intern left right) quantum)
        (left := left) (right := right))
      child R)
    selectors i k).symm
* apply sSup_le
  rintro T <fuel, child, R, hdepth, rfl>
  apply le_sSup
  refine <fuel + 1,
    wrapInternRight left right quantum child,
    wrapInternalRealization D_0 j_0 realize
      (ChannelInternalStep.internalRight
        (s := initialChannelConfig (.intern left right) quantum)
        (left := left) (right := right))
    child R,
    ?_, ?_>
* simp [wrapInternRight_depth] using Nat.succ_le_succ hdepth
* exact
  (restrictedResult_internal_of_identity D_0 j_0 realize
    (ChannelInternalStep.internalRight
      (s := initialChannelConfig (.intern left right) quantum)
      (left := left) (right := right))
    (channelInternalOperation_intern left right quantum)
    child
    (wrapInternalRealization D_0 j_0 realize
      (ChannelInternalStep.internalRight
        (s := initialChannelConfig (.intern left right) quantum)
        (left := left) (right := right))
      child R)
    selectors i k).symm
* apply sSup_le
  rintro T <_, tree, R, _, rfl>
  have hctrl :
    (initialChannelConfig (.intern left right) quantum).control =
      .term (.intern left right) :=
    rfl
  have hop := channelInternalOperation_intern left right quantum
  cases tree with
| terminal hterm =>
  have := hterm.control_eq.symm.trans hctrl
  cases this

```

```

| @internal _ t h next =>
  rcases ChannelInternalStep.eq_of_intern h hctrl with ht | ht
  * cases ht
    have := restrictedResult_internal_of_identity D_0 j_0 realize
      h hop next R selectors i k
    rw [this]
    apply le_sup_of_le_left
    apply le_sSup
    exact <next.depth,
      next,
      internalChildRealization D_0 j_0 realize h next R,
      le_rfl, rfl>
  * cases ht
    have := restrictedResult_internal_of_identity D_0 j_0 realize
      h hop next R selectors i k
    rw [this]
    apply le_sup_of_le_right
    apply le_sSup
    exact <next.depth,
      next,
      internalChildRealization D_0 j_0 realize h next R,
      le_rfl, rfl>
| external _ hex _ =>
  exact False.elim (ChannelExternalStep.not_intern hex hctrl)

theorem intern_ret_pauliX_channelTreeCompleteness {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (leftValue rightValue : C) (quantum : NormalizedDensity 2)
  (semanticEnv : Env (HSemanticValue D_0 j_0)) :
  ChannelTreeCompleteness D_0 j_0 realize
    (initialChannelConfig
      (.intern (.prim (.ret leftValue)) (.prim (.pauliX rightValue)))
      quantum)
    (interp (hardwarePrimitive D_0 j_0 realize)
      (.intern (.prim (.ret leftValue)) (.prim (.pauliX rightValue)))
      semanticEnv) :=
intern_channelTreeCompleteness D_0 j_0 realize _ _ quantum semanticEnv
(return_channelTreeCompleteness D_0 j_0 realize leftValue quantum
  semanticEnv)
(pauliX_channelTreeCompleteness D_0 j_0 realize rightValue quantum
  semanticEnv)

theorem intern_ret_measureZ_channelTreeCompleteness {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (leftValue zeroValue oneValue : C) (quantum : NormalizedDensity 2)
  (semanticEnv : Env (HSemanticValue D_0 j_0)) :
  ChannelTreeCompleteness D_0 j_0 realize
    (initialChannelConfig
      (.intern (.prim (.ret leftValue))
        (.prim (.measureZ zeroValue oneValue)))
      quantum)
    (interp (hardwarePrimitive D_0 j_0 realize)
      (.intern (.prim (.ret leftValue))
        (.prim (.measureZ zeroValue oneValue)))
      semanticEnv) :=
intern_channelTreeCompleteness D_0 j_0 realize _ _ quantum semanticEnv
(return_channelTreeCompleteness D_0 j_0 realize leftValue quantum
  semanticEnv)

```

```

    semanticEnv)
(measureZ_channelTreeCompleteness D_0 j_0 realize zeroValue oneValue
 quantum semanticEnv)

/-- Remove one already-consumed external selector from a leaf. -/
def dropSelector {C : Type} (leaf : ChannelLeaf C) : ChannelLeaf C :=
  { leaf with selectors := leaf.selectors.tail }

@[simp] theorem dropSelector_prependSelector {C : Type}
  (b : Bool) (leaf : ChannelLeaf C) :
  dropSelector (prependSelector b leaf) = leaf := by
cases leaf
rfl

/-- Wrap a completed child under one external-selection node. -/
def wrapExtern {C : Type} (b : Bool)
  (left right : Term (QubitPrimitive C))
  (quantum : NormalizedDensity 2)
  (child : ChannelTree C
    (initialChannelConfig (if b then right else left) quantum)) :
  ChannelTree C
  (initialChannelConfig (.extern left right) quantum) :=
ChannelTree.external b
  (by
    cases b
    * simp [initialChannelConfig, ofConfig, initialConfig] using
      (ChannelExternalStep.selectFalse
        (s := initialChannelConfig (.extern left right) quantum))
    * simp [initialChannelConfig, ofConfig, initialConfig] using
      (ChannelExternalStep.selectTrue
        (s := initialChannelConfig (.extern left right) quantum)))
  child

theorem wrapExtern_depth {C : Type} (b : Bool)
  (left right : Term (QubitPrimitive C))
  (quantum : NormalizedDensity 2)
  (child : ChannelTree C
    (initialChannelConfig (if b then right else left) quantum)) :
  (wrapExtern b left right quantum child).depth = child.depth + 1 :=
rfl

/-- Restrict a parent external realization to its selected child. -/
noncomputable def externalChildRealization {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s t : ChannelConfig C} (b : Bool)
  (h : ChannelExternalStep s b t)
  (next : ChannelTree C t)
  (R : ChannelTreeRealization D_0 j_0 realize
    (ChannelTree.external b h next)) :
  ChannelTreeRealization D_0 j_0 realize next where
value := fun leaf => R.value (prependSelector b leaf)
related := fun o => R.related o

/-- Lift a child realization through one external-selection node. -/
noncomputable def wrapExternalRealization {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s t : ChannelConfig C} (b : Bool)

```

```

(h : ChannelExternalStep s b t)
(next : ChannelTree C t)
(R : ChannelTreeRealization D_0 j_0 realize next) :
ChannelTreeRealization D_0 j_0 realize
  (ChannelTree.external b h next) where
value := fun leaf => R.value (dropSelector leaf)
related := by
  intro o
  change ValueRel D_0 j_0 realize
    (next.instrument.value o).isTerminal.value
    (R.value (dropSelector (prependSelector b (next.instrument.value o))))
  simp using R.related o

/-- Restriction across an external node consumes exactly its selector. -/
theorem embed_restricted_external_of_path {C : Type}
(D_0 : QDomain.{0})
(j_0 : IsContinuousLatticeProjection D_0.carrier
  (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
(realize : C -> HSemanticValue D_0 j_0)
{s t : ChannelConfig C} (b : Bool)
(h : ChannelExternalStep s b t)
(next : ChannelTree C t)
(R : ChannelTreeRealization D_0 j_0 realize
  (ChannelTree.external b h next))
(selectors childSelectors : List Bool) (i j : Nat)
(hpath : selectors ++ HardwareAdequacy.coordinatePath i =
  b :: (childSelectors ++ HardwareAdequacy.coordinatePath j)) :
embed (restrictedInstrument D_0 j_0 realize
  (ChannelTree.external b h next) R selectors i) =
  embed (restrictedInstrument D_0 j_0 realize next
    (externalChildRealization D_0 j_0 realize b h next R)
    childSelectors j) := by
let ? := restrictedInstrument D_0 j_0 realize
  (ChannelTree.external b h next) R selectors i
let ? := restrictedInstrument D_0 j_0 realize next
  (externalChildRealization D_0 j_0 realize b h next R) childSelectors j
refine embed_congr_of_outcome_equiv ? ? ?e ?hbranch ?hvalue
* exact
  { toFun := fun p =>
    <p.1, by
      have hp : OutcomeCompatible (ChannelTree.external b h next)
        selectors i p.1 := p.2
      change List.IsPrefix
        (b :: (next.instrument.value p.1).selectors)
        (selectors ++ HardwareAdequacy.coordinatePath i) at hp
      rw [hpath] at hp
      have hp' : List.IsPrefix
        (next.instrument.value p.1).selectors
        (childSelectors ++ HardwareAdequacy.coordinatePath j) := by
        simp using hp
      change OutcomeCompatible next childSelectors j p.1
      exact hp'>
  invFun := fun q =>
    <q.1, by
      have hq : OutcomeCompatible next childSelectors j q.1 := q.2
      change List.IsPrefix
        (next.instrument.value q.1).selectors
        (childSelectors ++ HardwareAdequacy.coordinatePath j) at hq
      change List.IsPrefix
        (b :: (next.instrument.value q.1).selectors)
        (selectors ++ HardwareAdequacy.coordinatePath i)
      rw [hpath]
      simp using hq>

```

```

    left_inv := by
      intro p
      rcases p with <o, ho>
      rfl
    right_inv := by
      intro q
      rcases q with <o, ho>
      rfl }
* intro p
  rfl
* intro p
  rfl

theorem embed_restricted_external_cons {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s t : ChannelConfig C} (b : Bool)
  (h : ChannelExternalStep s b t)
  (next : ChannelTree C t)
  (R : ChannelTreeRealization D_0 j_0 realize
    (ChannelTree.external b h next))
  (selectors : List Bool) (i : Nat) :
  embed (restrictedInstrument D_0 j_0 realize
    (ChannelTree.external b h next) R (b :: selectors) i) =
  embed (restrictedInstrument D_0 j_0 realize next
    (externalChildRealization D_0 j_0 realize b h next R)
    selectors i) :=
  embed_restricted_external_of_path D_0 j_0 realize b h next R
  (b :: selectors) selectors i i rfl

theorem embed_restricted_external_coordinate {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s t : ChannelConfig C} (b : Bool)
  (h : ChannelExternalStep s b t)
  (next : ChannelTree C t)
  (R : ChannelTreeRealization D_0 j_0 realize
    (ChannelTree.external b h next))
  (j : Nat) :

```

Lean 4 source (lines 3601–4000)

```

  embed (restrictedInstrument D_0 j_0 realize
    (ChannelTree.external b h next) R [])
    (HardwareAdequacy.branchCoordinate b j)) =
  embed (restrictedInstrument D_0 j_0 realize next
    (externalChildRealization D_0 j_0 realize b h next R) [] j) := by
  apply embed_restricted_external_of_path D_0 j_0 realize b h next R
  cases b <=> simp

theorem restrictedResult_external_of_path {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s t : ChannelConfig C} (b : Bool)
  (h : ChannelExternalStep s b t)
  (next : ChannelTree C t)
  (R : ChannelTreeRealization D_0 j_0 realize
    (ChannelTree.external b h next))

```

```

(selectors childSelectors : List Bool) (i j : Nat)
(hpath : selectors ++ HardwareAdequacy.coordinatePath i =
  b :: (childSelectors ++ HardwareAdequacy.coordinatePath j))
(k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)) :
restrictedResult D_0 j_0 realize
  (ChannelTree.external b h next) R selectors i k =
restrictedResult D_0 j_0 realize next
  (externalChildRealization D_0 j_0 realize b h next R)
  childSelectors j k := by
classical
let childR := externalChildRealization D_0 j_0 realize b h next R
have havail_iff :
  ResultAvailable (ChannelTree.external b h next) selectors i <->
  ResultAvailable next childSelectors j := by
  simp [ResultAvailable, resultAvailableAt, hpath]
by_cases havail :
  ResultAvailable (ChannelTree.external b h next) selectors i
* rw [restrictedResult_eq_embed D_0 j_0 realize
  (ChannelTree.external b h next) R selectors i k havail,
  restrictedResult_eq_embed D_0 j_0 realize next childR childSelectors j k
  (havail_iff.mp havail),
  embed_restricted_external_of_path D_0 j_0 realize b h next R
  selectors childSelectors i j hpath]
* have hunavailableChild :
  not ResultAvailable next childSelectors j :=
  fun hc => havail (havail_iff.mpr hc)
rw [restrictedResult_eq_bot D_0 j_0 realize
  (ChannelTree.external b h next) R selectors i k havail,
  restrictedResult_eq_bot D_0 j_0 realize next childR childSelectors j k
  hunavailableChild]

theorem restrictedResult_external_cons {C : Type}
(D_0 : QDomain.{0})
(j_0 : IsContinuousLatticeProjection D_0.carrier
  (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
(realize : C -> HSemanticValue D_0 j_0)
{s t : ChannelConfig C} (b : Bool)
(h : ChannelExternalStep s b t)
(next : ChannelTree C t)
(R : ChannelTreeRealization D_0 j_0 realize
  (ChannelTree.external b h next))
(selectors : List Bool) (i : Nat)
(k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)) :
restrictedResult D_0 j_0 realize
  (ChannelTree.external b h next) R (b :: selectors) i k =
  restrictedResult D_0 j_0 realize next
  (externalChildRealization D_0 j_0 realize b h next R)
  selectors i k :=
restrictedResult_external_of_path D_0 j_0 realize b h next R
  (b :: selectors) selectors i i rfl k

theorem restrictedResult_external_coordinate {C : Type}
(D_0 : QDomain.{0})
(j_0 : IsContinuousLatticeProjection D_0.carrier
  (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
(realize : C -> HSemanticValue D_0 j_0)
{s t : ChannelConfig C} (b : Bool)
(h : ChannelExternalStep s b t)
(next : ChannelTree C t)
(R : ChannelTreeRealization D_0 j_0 realize
  (ChannelTree.external b h next))
(j : Nat)
(k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)) :

```



```

restrictedResult D_0 j_0 realize
  (ChannelTree.external b h next) R []
  (HardwareAdequacy.branchCoordinate b j) k =
  restrictedResult D_0 j_0 realize next
  (externalChildRealization D_0 j_0 realize b h next R) [] j k := by
apply restrictedResult_external_of_path D_0 j_0 realize b h next R
cases b <;> simp

theorem restrictedResult_external_root {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s t : ChannelConfig C} (b : Bool)
  (h : ChannelExternalStep s b t)
  (next : ChannelTree C t)
  (R : ChannelTreeRealization D_0 j_0 realize
    (ChannelTree.external b h next))
  (k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)) :
  restrictedResult D_0 j_0 realize
    (ChannelTree.external b h next) R [] 0 k = False := by
apply restrictedResult_eq_bot
simp [ResultAvailable, resultAvailableAt,
  HardwareAdequacy.coordinatePath]

theorem restrictedResult_external_mismatch {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s t : ChannelConfig C} (b c : Bool) (hbc : b != c)
  (h : ChannelExternalStep s b t)
  (next : ChannelTree C t)
  (R : ChannelTreeRealization D_0 j_0 realize
    (ChannelTree.external b h next))
  (selectors : List Bool) (i : Nat)
  (k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)) :
  restrictedResult D_0 j_0 realize
    (ChannelTree.external b h next) R (c :: selectors) i k = False := by
apply restrictedResult_eq_bot
cases b <;> cases c <;>
  simp_all [ResultAvailable, resultAvailableAt]

theorem restrictedResult_external_coordinate_mismatch {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s t : ChannelConfig C} (b c : Bool) (hbc : b != c)
  (h : ChannelExternalStep s b t)
  (next : ChannelTree C t)
  (R : ChannelTreeRealization D_0 j_0 realize
    (ChannelTree.external b h next))
  (j : Nat)
  (k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)) :
  restrictedResult D_0 j_0 realize
    (ChannelTree.external b h next) R []
    (HardwareAdequacy.branchCoordinate c j) k = False := by
apply restrictedResult_eq_bot
cases b <;> cases c <;>
  simp_all [ResultAvailable, resultAvailableAt]

theorem selectPath_extern_cons {C : Type}

```

```

(D_0 : QDomain.{0})
(j_0 : IsContinuousLatticeProjection D_0.carrier
  (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
(realize : C -> HSemanticValue D_0 j_0)
(left right : Term (QubitPrimitive C))
(semanticEnv : Env (HSemanticValue D_0 j_0))
(b : Bool) (selectors : List Bool) (i : Nat)
(k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)) :
HardwareAdequacy.selectPath (b :: selectors)
  (interp (hardwarePrimitive D_0 j_0 realize) (.extern left right)
    semanticEnv) i k =
  HardwareAdequacy.selectPath selectors
    (interp (hardwarePrimitive D_0 j_0 realize)
      (if b then right else left) semanticEnv) i k := by
rw [HardwareAdequacy.selectPath_cons, interp_extern_apply]
cases b
* rw [TTContinuation.computation_extern_select_false]
  simp
* rw [TTContinuation.computation_extern_select_true]
  simp

theorem selectPath_extern_coordinate {C : Type}
(D_0 : QDomain.{0})
(j_0 : IsContinuousLatticeProjection D_0.carrier
  (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
(realize : C -> HSemanticValue D_0 j_0)
(left right : Term (QubitPrimitive C))
(semanticEnv : Env (HSemanticValue D_0 j_0))
(b : Bool) (j : Nat)
(k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)) :
interp (hardwarePrimitive D_0 j_0 realize) (.extern left right)
  semanticEnv (HardwareAdequacy.branchCoordinate b j) k =
  interp (hardwarePrimitive D_0 j_0 realize)
    (if b then right else left) semanticEnv j k := by
rw [interp_extern_apply]
cases b
* change (TTContinuation.selectBranch false
  (HasComputationChoice.extern
    (interp (hardwarePrimitive D_0 j_0 realize) left semanticEnv,
      interp (hardwarePrimitive D_0 j_0 realize) right semanticEnv))) j) k =
  -
  rw [TTContinuation.computation_extern_select_false]
  simp
* change (TTContinuation.selectBranch true
  (HasComputationChoice.extern
    (interp (hardwarePrimitive D_0 j_0 realize) left semanticEnv,
      interp (hardwarePrimitive D_0 j_0 realize) right semanticEnv))) j) k =
  -
  rw [TTContinuation.computation_extern_select_true]
  simp

/-- The tree-result supremum below a consumed external selector is exactly the
corresponding child supremum. -/
theorem external_cons_channelTreeSup {C : Type}
(D_0 : QDomain.{0})
(j_0 : IsContinuousLatticeProjection D_0.carrier
  (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
(realize : C -> HSemanticValue D_0 j_0)
(left right : Term (QubitPrimitive C))
(quantum : NormalizedDensity 2)
(b : Bool) (selectors : List Bool) (i : Nat)
(k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)) :
sSup (channelTreeResults D_0 j_0 realize

```

```

      (initialChannelConfig (.extern left right) quantum)
      (b :: selectors) i k) =
    sSup (channelTreeResults D_0 j_0 realize
      (initialChannelConfig (if b then right else left) quantum)
      selectors i k) := by
let source := initialChannelConfig (.extern left right) quantum
let target := initialChannelConfig (if b then right else left) quantum
have hb : ChannelExternalStep source b target := by
  cases b
  * simpa [source, target, initialChannelConfig, ofConfig, initialConfig]
    using (ChannelExternalStep.selectFalse (s := source))
  * simpa [source, target, initialChannelConfig, ofConfig, initialConfig]
    using (ChannelExternalStep.selectTrue (s := source))
apply le_antisymm
* apply sSup_le
  rintro T <_, tree, R, _, rfl>
  have hctrl : source.control = .term (.extern left right) := rfl
  cases tree with
  | terminal hterm =>
    have := hterm.control_eq.symm.trans hctrl
    cases this
  | internal h _ =>
    exact False.elim (ChannelInternalStep.not_extern h hctrl)
  | external c h next =>
    have ht := ChannelExternalStep.eq_of_extern h hctrl
    cases b <.> cases c
    * cases ht
      rw [restrictedResult_external_cons]
      apply le_sSup
      exact <next.depth, next,
        externalChildRealization D_0 j_0 realize false h next R, le_rfl, rfl>
    * rw [restrictedResult_external_mismatch D_0 j_0 realize true false
      (by decide) h next R selectors i k]
      exact bot_le
    * rw [restrictedResult_external_mismatch D_0 j_0 realize false true
      (by decide) h next R selectors i k]
      exact bot_le
    * cases ht
      rw [restrictedResult_external_cons]
      apply le_sSup
      exact <next.depth, next,
        externalChildRealization D_0 j_0 realize true h next R, le_rfl, rfl>
* apply sSup_le
  rintro T <fuel, child, R, hdepth, rfl>
  apply le_sSup
  refine <fuel + 1, ChannelTree.external b hb child,
    wrapExternalRealization D_0 j_0 realize b hb child R, ?_, ?_>
  * change child.depth + 1 <= fuel + 1
    omega
  * rw [restrictedResult_external_cons]
    rfl

/-- The same shift when the external selector is supplied by the heap
coordinate rather than by an explicit selector list. -/
theorem external_coordinate_channelTreeSup {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (left right : Term (QubitPrimitive C))
  (quantum : NormalizedDensity 2)
  (b : Bool) (j : Nat)
  (k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)) :

```

```

sSup (channelTreeResults D_0 j_0 realize
  (initialChannelConfig (.extern left right) quantum) []
  (HardwareAdequacy.branchCoordinate b j) k) =
  sSup (channelTreeResults D_0 j_0 realize
    (initialChannelConfig (if b then right else left) quantum) [] j k) := by
let source := initialChannelConfig (.extern left right) quantum
let target := initialChannelConfig (if b then right else left) quantum
have hb : ChannelExternalStep source b target := by
  cases b
  * simp [source, target, initialChannelConfig, ofConfig, initialConfig]
    using (ChannelExternalStep.selectFalse (s := source))
  * simp [source, target, initialChannelConfig, ofConfig, initialConfig]
    using (ChannelExternalStep.selectTrue (s := source))
apply le_antisymm
* apply sSup_le
  rintro T <_, tree, R, _, rfl>
  have hctrl : source.control = .term (.extern left right) := rfl
  cases tree with
  | terminal hterm =>
    have := hterm.control_eq.symm.trans hctrl
    cases this
  | internal h _ =>
    exact False.elim (ChannelInternalStep.not_extern h hctrl)
  | external c h next =>
    have ht := ChannelExternalStep.eq_of_extern h hctrl
    cases b <.> cases c
    * cases ht
      rw [restrictedResult_external_coordinate]
      apply le_sSup
      exact <next.depth, next,
        externalChildRealization D_0 j_0 realize false h next R, le_rfl, rfl>
    * rw [restrictedResult_external_coordinate_mismatch D_0 j_0 realize
      true false (by decide) h next R j k]
      exact bot_le
    * rw [restrictedResult_external_coordinate_mismatch D_0 j_0 realize
      false true (by decide) h next R j k]
      exact bot_le
    * cases ht
      rw [restrictedResult_external_coordinate]
      apply le_sSup
      exact <next.depth, next,
        externalChildRealization D_0 j_0 realize true h next R, le_rfl, rfl>
* apply sSup_le
  rintro T <fuel, child, R, hdepth, rfl>
  apply le_sSup
  refine <fuel + 1, ChannelTree.external b hb child,
    wrapExternalRealization D_0 j_0 realize b hb child R, ?_, ?_>
  * change child.depth + 1 <= fuel + 1
    omega
  * rw [restrictedResult_external_coordinate]
    rfl

/-- At the unresolved external root every completing tree contributes bottom. -/
theorem external_root_channelTreeSup {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (left right : Term (QubitPrimitive C))
  (quantum : NormalizedDensity 2)
  (k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)) :
  sSup (channelTreeResults D_0 j_0 realize
    (initialChannelConfig (.extern left right) quantum) [] 0 k) = False := by

```

```

apply le_antisymm
* apply sSup_le
  rintro T <_, tree, R, _, rfl>
  have hctrl :
    (initialChannelConfig (.extern left right) quantum).control =
      .term (.extern left right) := rfl
  cases tree with
  | terminal hterm =>
    have := hterm.control_eq.symm.trans hctrl
    cases this
  | internal h _ =>
    exact False.elim (ChannelInternalStep.not_extern h hctrl)
  | external _ h next =>
    rw [restrictedResult_external_root]
* exact bot_le

/-- Compositional channel-tree completeness for external choice. -/
theorem extern_channelTreeCompleteness {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (left right : Term (QubitPrimitive C))
  (quantum : NormalizedDensity 2)
  (semanticEnv : Env (HSemanticValue D_0 j_0))
  (hleft : ChannelTreeCompleteness D_0 j_0 realize
    (initialChannelConfig left quantum)
    (interp (hardwarePrimitive D_0 j_0 realize) left semanticEnv))
  (hright : ChannelTreeCompleteness D_0 j_0 realize
    (initialChannelConfig right quantum)
    (interp (hardwarePrimitive D_0 j_0 realize) right semanticEnv)) :
  ChannelTreeCompleteness D_0 j_0 realize
    (initialChannelConfig (.extern left right) quantum)
    (interp (hardwarePrimitive D_0 j_0 realize) (.extern left right)
      semanticEnv) where
selected_result_eq_channelTree_sup := by
  intro selectors i k
  cases selectors with
  | cons b selectors =>
    rw [selectPath_extern_cons]
    cases b
    * simp only [Bool.false_eq_true, if_false]
    rw [hleft.selected_result_eq_channelTree_sup,
      external_cons_channelTreeSup]
    simp
    * simp only [if_true]
    rw [hright.selected_result_eq_channelTree_sup,
      external_cons_channelTreeSup]
    simp
  | nil =>
    cases i with
    | zero =>
      rw [HardwareAdequacy.selectPath_nil, interp_extern_apply,
        external_root_channelTreeSup]
      change (TTContinuation.externalChoice
        (interp (hardwarePrimitive D_0 j_0 realize) left semanticEnv,
          interp (hardwarePrimitive D_0 j_0 realize) right semanticEnv)
        0) k = False
      rw [TTContinuation.externalChoice_root_bot]
      exact ScottMap.bot_apply k
    | succ n =>
      by_cases heven : n % 2 = 0
      * have hi : n + 1 =

```

```

      HardwareAdequacy.branchCoordinate false (n / 2) := by
    simp [HardwareAdequacy.branchCoordinate]
    omega
  rw [hi, HardwareAdequacy.selectPath_nil,

```

Lean 4 source (lines 4001–4400)

```

      selectPath_extern_coordinate]
    simp only [Bool.false_eq_true, if_false]
    have hc :=
      hleft.selected_result_eq_channelTree_sup [] (n / 2) k
    have hc' :
      interp (hardwarePrimitive D_0 j_0 realize) left semanticEnv
        (n / 2) k =
        sSup (channelTreeResults D_0 j_0 realize
          (initialChannelConfig left quantum) [] (n / 2) k) := by
      simpa using hc
    exact hc'.trans
      (external_coordinate_channelTreeSup D_0 j_0 realize left right
        quantum false (n / 2) k).symm
* have hodd : n % 2 = 1 := by omega
have hi : n + 1 =
  HardwareAdequacy.branchCoordinate true (n / 2) := by
    simp [HardwareAdequacy.branchCoordinate]
    omega
  rw [hi, HardwareAdequacy.selectPath_nil,
    selectPath_extern_coordinate]
    simp only [if_true]
    have hc :=
      hright.selected_result_eq_channelTree_sup [] (n / 2) k
    have hc' :
      interp (hardwarePrimitive D_0 j_0 realize) right semanticEnv
        (n / 2) k =
        sSup (channelTreeResults D_0 j_0 realize
          (initialChannelConfig right quantum) [] (n / 2) k) := by
      simpa using hc
    exact hc'.trans
      (external_coordinate_channelTreeSup D_0 j_0 realize left right
        quantum true (n / 2) k).symm

theorem extern_returns_channelTreeCompleteness {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (leftValue rightValue : C) (quantum : NormalizedDensity 2)
  (semanticEnv : Env (HSemanticValue D_0 j_0)) :
  ChannelTreeCompleteness D_0 j_0 realize
    (initialChannelConfig
      (.extern (.prim (.ret leftValue)) (.prim (.ret rightValue))) quantum)
    (interp (hardwarePrimitive D_0 j_0 realize)
      (.extern (.prim (.ret leftValue)) (.prim (.ret rightValue)))
      semanticEnv) :=
  extern_channelTreeCompleteness D_0 j_0 realize _ _ quantum semanticEnv
    (return_channelTreeCompleteness D_0 j_0 realize leftValue quantum semanticEnv)
    (return_channelTreeCompleteness D_0 j_0 realize rightValue quantum semanticEnv)

/-- Remove one probability/measurement provenance tag from a leaf. -/
def dropPhysical {C : Type} (leaf : ChannelLeaf C) : ChannelLeaf C :=
  { leaf with physicalPath := leaf.physicalPath.tail }

@[simp] theorem dropPhysical_prependPhysical {C : Type}
  (b : Bool) (leaf : ChannelLeaf C) :
  dropPhysical (prependPhysical b leaf) = leaf := by

```

```

cases leaf
rfl

/-- Restrict a realized binary probability tree to its left child. -/
noncomputable def probabilityLeftRealization {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} {p : ?}
  {leftTerm rightTerm : Term (QubitPrimitive C)}
  (hp_0 : 0 < p) (hp_1 : p < 1)
  (left : ChannelTree C
    { s with
      control := .term leftTerm
      quantum := applyOperation
        (sourceProbabilityOperation p hp_0.le hp_1.le) s.quantum })
  (right : ChannelTree C
    { s with
      control := .term rightTerm
      quantum := applyOperation
        (sourceProbabilityOperation (1 - p)
          (sub_nonneg.mpr hp_1.le) (by linarith)) s.quantum })
  (R : ChannelTreeRealization D_0 j_0 realize
    (ChannelTree.probability hp_0 hp_1 left right)) :
  ChannelTreeRealization D_0 j_0 realize left where
value := fun leaf => R.value (prependPhysical false leaf)
related := by
  intro o
  exact R.related <false, o>

/-- Restrict a realized binary probability tree to its right child. -/
noncomputable def probabilityRightRealization {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} {p : ?}
  {leftTerm rightTerm : Term (QubitPrimitive C)}
  (hp_0 : 0 < p) (hp_1 : p < 1)
  (left : ChannelTree C
    { s with
      control := .term leftTerm
      quantum := applyOperation
        (sourceProbabilityOperation p hp_0.le hp_1.le) s.quantum })
  (right : ChannelTree C
    { s with
      control := .term rightTerm
      quantum := applyOperation
        (sourceProbabilityOperation (1 - p)
          (sub_nonneg.mpr hp_1.le) (by linarith)) s.quantum })
  (R : ChannelTreeRealization D_0 j_0 realize
    (ChannelTree.probability hp_0 hp_1 left right)) :
  ChannelTreeRealization D_0 j_0 realize right where
value := fun leaf => R.value (prependPhysical true leaf)
related := by
  intro o
  exact R.related <true, o>

/-- Reassemble child realizations using their retained physical provenance. -/
noncomputable def wrapProbabilityRealization {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier

```

```

    (QuantumFuctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
(realize : C -> HSemanticValue D_0 j_0)
{ s : ChannelConfig C } { p : ? }
{ leftTerm rightTerm : Term (QubitPrimitive C) }
{ hp_0 : 0 < p } { hp_1 : p < 1 }
(left : ChannelTree C
  { s with
    control := .term leftTerm
    quantum := applyOperation
      (sourceProbabilityOperation p hp_0.le hp_1.le) s.quantum })
(right : ChannelTree C
  { s with
    control := .term rightTerm
    quantum := applyOperation
      (sourceProbabilityOperation (1 - p)
        (sub_nonneg.mpr hp_1.le) (by linarith)) s.quantum })
(leftR : ChannelTreeRealization D_0 j_0 realize left)
(rightR : ChannelTreeRealization D_0 j_0 realize right) :
ChannelTreeRealization D_0 j_0 realize
  (ChannelTree.probability hp_0 hp_1 left right) where
value := fun leaf =>
  match leaf.physicalPath with
  | false :: _ => leftR.value (dropPhysical leaf)
  | true :: _ => rightR.value (dropPhysical leaf)
  | [] => False
related := by
  rintro <b, o>
  cases b
  * change ValueRel D_0 j_0 realize
    (left.instrument.value o).isTerminal.value
    (leftR.value (dropPhysical
      (prependPhysical false (left.instrument.value o))))
    simpa using leftR.related o
  * change ValueRel D_0 j_0 realize
    (right.instrument.value o).isTerminal.value
    (rightR.value (dropPhysical
      (prependPhysical true (right.instrument.value o))))
    simpa using rightR.related o

/-- Restriction commutes with an interior physical probability node. This is
an outcome reindexing theorem; no lattice operation is used to model the
probability. -/
theorem embed_restricted_probability {C : Type}
(D_0 : QDomain.{0})
(j_0 : IsContinuousLatticeProjection D_0.carrier
  (QuantumFuctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
(realize : C -> HSemanticValue D_0 j_0)
{ s : ChannelConfig C } { p : ? }
{ leftTerm rightTerm : Term (QubitPrimitive C) }
{ hp_0 : 0 < p } { hp_1 : p < 1 }
(left : ChannelTree C
  { s with
    control := .term leftTerm
    quantum := applyOperation
      (sourceProbabilityOperation p hp_0.le hp_1.le) s.quantum })
(right : ChannelTree C
  { s with
    control := .term rightTerm
    quantum := applyOperation
      (sourceProbabilityOperation (1 - p)
        (sub_nonneg.mpr hp_1.le) (by linarith)) s.quantum })
(R : ChannelTreeRealization D_0 j_0 realize
  (ChannelTree.probability hp_0 hp_1 left right))

```



```

(selectors : List Bool) (i : Nat) :
embed (restrictedInstrument D_0 j_0 realize
  (ChannelTree.probability hp_0 hp_1 left right) R selectors i) =
  embed ((FiniteInstrumentComp.weightedCoin (n := 2) p hp_0.le hp_1.le).bind
    (fun b => if b then
      restrictedInstrument D_0 j_0 realize right
        (probabilityRightRealization D_0 j_0 realize hp_0 hp_1 left right R)
        selectors i
    else
      restrictedInstrument D_0 j_0 realize left
        (probabilityLeftRealization D_0 j_0 realize hp_0 hp_1 left right R)
        selectors i)) := by
let ? := restrictedInstrument D_0 j_0 realize
  (ChannelTree.probability hp_0 hp_1 left right) R selectors i
let leftR :=
  probabilityLeftRealization D_0 j_0 realize hp_0 hp_1 left right R
let rightR :=
  probabilityRightRealization D_0 j_0 realize hp_0 hp_1 left right R
let ? := (FiniteInstrumentComp.weightedCoin (n := 2) p hp_0.le hp_1.le).bind
  (fun b => if b then
    restrictedInstrument D_0 j_0 realize right rightR selectors i
  else
    restrictedInstrument D_0 j_0 realize left leftR selectors i)
refine embed_congr_of_outcome_equiv ? ? ?_ ?_ ?_
* exact
{ toFun := by
  rintro <<b, o>, hq>
  cases b
  * exact <false, <o, hq>>
  * exact <true, <o, hq>>
invFun := by
  rintro <b, q>
  cases b
  * rcases q with <o, hq>
    exact <<false, o>, hq>
  * rcases q with <o, hq>
    exact <<true, o>, hq>
left_inv := by
  intro q
  rcases q with <<b, o>, hq>
  cases b <;> rfl
right_inv := by
  intro q
  rcases q with <b, q>
  cases b
  * rcases q with <o, hq>
    rfl
  * rcases q with <o, hq>
    rfl }
* intro q
  rcases q with <<b, o>, hq>
  cases b <;> rfl
* intro q
  rcases q with <<b, o>, hq>
  cases b
  * change leftR.value (left.instrument.value o) =
    R.value (prependPhysical false (left.instrument.value o))
    rfl
  * change rightR.value (right.instrument.value o) =
    R.value (prependPhysical true (right.instrument.value o))
    rfl

```

-- Project a realized measurement tree to its zero-outcome child. --

```

noncomputable def measurementZeroRealization {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} {zeroValue oneValue : C}
  (zero : ChannelTree C
    { s with
      control := .value (.payload zeroValue)
      quantum := applyOperation (measurementOperation false) s.quantum })
  (one : ChannelTree C
    { s with
      control := .value (.payload oneValue)
      quantum := applyOperation (measurementOperation true) s.quantum })
  (R : ChannelTreeRealization D_0 j_0 realize
    (ChannelTree.measurement zero one)) :
  ChannelTreeRealization D_0 j_0 realize zero where
value := R.value
related := by
  intro o
  exact R.related <false, o>

/-- Project a realized measurement tree to its one-outcome child. -/
noncomputable def measurementOneRealization {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} {zeroValue oneValue : C}
  (zero : ChannelTree C
    { s with
      control := .value (.payload zeroValue)
      quantum := applyOperation (measurementOperation false) s.quantum })
  (one : ChannelTree C
    { s with
      control := .value (.payload oneValue)
      quantum := applyOperation (measurementOperation true) s.quantum })
  (R : ChannelTreeRealization D_0 j_0 realize
    (ChannelTree.measurement zero one)) :
  ChannelTreeRealization D_0 j_0 realize one where
value := R.value
related := by
  intro o
  exact R.related <true, o>

/-- A canonical semantic representative for any channel leaf for which a
logical-relation witness exists. This is used to combine independently
chosen realizations of the two measurement children. -/
noncomputable def relatedLeafValue {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (leaf : ChannelLeaf C) : HSemanticValue D_0 j_0 :=
by
  classical
  exact if h : exists d, ValueRel D_0 j_0 realize leaf.isTerminal.value d then
    Classical.choose h
  else
    False

theorem relatedLeafValue_related {C : Type}
  (D_0 : QDomain.{0})

```

```

(j_0 : IsContinuousLatticeProjection D_0.carrier
  (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
(realize : C -> HSemanticValue D_0 j_0)
(leaf : ChannelLeaf C)
(h : exists d, ValueRel D_0 j_0 realize leaf.isTerminal.value d) :
ValueRel D_0 j_0 realize leaf.isTerminal.value
  (relatedLeafValue D_0 j_0 realize leaf) := by
rw [relatedLeafValue, dif_pos h]
exact Classical.choose_spec h

/-- Reassemble independently realized measurement children. Unlike source
probability, measurement does not record a branch tag in `ChannelLeaf`, so a
canonical representative of the leaf's logical value is used. -/
noncomputable def wrapMeasurementRealization {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} {zeroValue oneValue : C}
  (zero : ChannelTree C
    { s with
      control := .value (.payload zeroValue)
      quantum := applyOperation (measurementOperation false) s.quantum })
  (one : ChannelTree C
    { s with
      control := .value (.payload oneValue)
      quantum := applyOperation (measurementOperation true) s.quantum })
  (zeroR : ChannelTreeRealization D_0 j_0 realize zero)
  (oneR : ChannelTreeRealization D_0 j_0 realize one) :
ChannelTreeRealization D_0 j_0 realize
  (ChannelTree.measurement zero one) where
value := relatedLeafValue D_0 j_0 realize
related := by
  rintro <b, o>
  cases b
  * exact relatedLeafValue_related D_0 j_0 realize _
    <zeroR.value (zero.instrument.value o), zeroR.related o>
  * exact relatedLeafValue_related D_0 j_0 realize _
    <oneR.value (one.instrument.value o), oneR.related o>

/-- Restriction commutes with an interior computational-basis measurement.
The parent restriction and the measurement of its restricted children differ
only by their nested proof-subtype outcome representation. -/
theorem embed_restricted_measurement {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} {zeroValue oneValue : C}
  (zero : ChannelTree C
    { s with
      control := .value (.payload zeroValue)
      quantum := applyOperation (measurementOperation false) s.quantum })
  (one : ChannelTree C
    { s with
      control := .value (.payload oneValue)
      quantum := applyOperation (measurementOperation true) s.quantum })
  (R : ChannelTreeRealization D_0 j_0 realize
    (ChannelTree.measurement zero one))
  (selectors : List Bool) (i : Nat) :
embed (restrictedInstrument D_0 j_0 realize
  (ChannelTree.measurement zero one) R selectors i) =
  embed (Qubit.measureZComp.bind

```

```

    (fun b => if b then
      restrictedInstrument D_0 j_0 realize one
      (measurementOneRealization D_0 j_0 realize zero one R) selectors i
    else
      restrictedInstrument D_0 j_0 realize zero
      (measurementZeroRealization D_0 j_0 realize zero one R) selectors i)) := by
let ? := restrictedInstrument D_0 j_0 realize
  (ChannelTree.measurement zero one) R selectors i
let zeroR := measurementZeroRealization D_0 j_0 realize zero one R
let oneR := measurementOneRealization D_0 j_0 realize zero one R
let ? := Qubit.measureZComp.bind
  (fun b => if b then
    restrictedInstrument D_0 j_0 realize one oneR selectors i
  else
    restrictedInstrument D_0 j_0 realize zero zeroR selectors i)
refine embed_congr_of_outcome_equiv ? ? ?_ ?_ ?_
* exact
{ toFun := by
  rintro <<b, o>, hq>
  cases b
  * exact <false, <o, hq>>
  * exact <true, <o, hq>>
invFun := by
  rintro <b, q>
  cases b
  * rcases q with <o, hq>
    exact <<false, o>, hq>
  * rcases q with <o, hq>

```

Lean 4 source (lines 4401–4800)

```

    exact <<true, o>, hq>
left_inv := by
  rintro <<b, o>, hq>
  cases b <;> rfl
right_inv := by
  rintro <b, q>
  cases b
  * rcases q with <o, hq>
    rfl
  * rcases q with <o, hq>
    rfl }
* rintro <<b, o>, hq>
  cases b <;> rfl
* rintro <<b, o>, hq>
  cases b <;> rfl

theorem satisfiedTTTheory_eq_of_wpKraus_semEq
  {? ? : FiniteInstrumentComp 2 PUnit.{1}}
  (h : forall P : PUnit.{1} -> KrausFamily 2 2,
    KrausFamily.SemEq (? wpKraus P) (? wpKraus P)) :
  ?.satisfiedTTTheory resultCode = ?.satisfiedTTTheory resultCode := by
  apply (FiniteInstrumentComp.satisfiedTTTheory_eq_iff_mutual_finitaryTTRefines
    resultCode).2
constructor
* intro c
  exact KrausFamily.residualRefines_of_semEq (h (c.decode resultCode))
* intro c
  exact KrausFamily.residualRefines_of_semEq
    (KrausFamily.applySemEq_symm (h (c.decode resultCode)))

theorem satisfiedTTTheory_bind_assoc
  {D E : Type} [Preorder D] [Preorder E]
  (? : FiniteInstrumentComp 2 D)

```

```

(f : D -> FiniteInstrumentComp 2 E)
(g : E -> FiniteInstrumentComp 2 PUnit.{1}) :
(((?.bind f).bind g).satisfiedTTTheory resultCode) =
  ((?.bind fun d => (f d).bind g).satisfiedTTTheory resultCode) := by
apply satisfiedTTTheory_eq_of_wpKraus_semEq
intro P
exact KrausFamily.applySemEq_trans
  (FiniteInstrumentComp.wpKraus_bind_semEq (?.bind f) g P)
  (KrausFamily.applySemEq_trans
    (FiniteInstrumentComp.wpKraus_bind_semEq ? f
      (fun e => (g e).wpKraus P))
    (KrausFamily.applySemEq_trans
      (FiniteInstrumentComp.wpKraus_semEq_pred ? fun d =>
        KrausFamily.applySemEq_symm
          (FiniteInstrumentComp.wpKraus_bind_semEq (f d) g P))
      (KrausFamily.applySemEq_symm
        (FiniteInstrumentComp.wpKraus_bind_semEq ?
          (fun d => (f d).bind g) P))))))

/-- On a finitely presented final continuation, wrapping `?` around an
embedded child is evaluation of the `ofOperation` embedding. -/
theorem embed_ofOperation_const_embed {D : Type} [CompleteLattice D]
  (? : QuantumOperation 2 2) (d : D)
  (? : FiniteInstrumentComp 2 D)
  (? : D -> FiniteInstrumentComp 2 PUnit.{1})
  (k : ScottMap D (TTContinuation.TTResult 2))
  (hk : forall x, k x = (? x).satisfiedTTTheory TTContinuation.resultCode) :
  embed (FiniteInstrumentComp.ofOperation ? d)
    (ScottMap.const (embed ? k)) =
  embed
    ((FiniteInstrumentComp.ofOperation ? ().bind fun _ => ?) k := by
have h? := embed_satisfied ? ? k (fun q => hk (? .value q))
have hleft :=
  embed_satisfied (FiniteInstrumentComp.ofOperation ? d)
    (fun _ => ?.bind ?) (ScottMap.const (embed ? k))
  (by
    intro o
    change embed ? k =
      ((?.bind ?).satisfiedTTTheory TTContinuation.resultCode)
    exact h?)
have hassoc :=
  satisfiedTTTheory_bind_assoc
    (FiniteInstrumentComp.ofOperation ? d)
    (fun _ => ?) ?
have h? :
  embed ((FiniteInstrumentComp.ofOperation ? d).bind fun _ => ?) =
  embed
    ((FiniteInstrumentComp.ofOperation ? ().bind fun _ => ?) := by
refine embed_congr_of_outcome_equiv _ _ ?e ?hb ?hv
* exact
  { toFun := fun p => p
    invFun := fun q => q
    left_inv := fun p => rfl
    right_inv := fun q => rfl }
* intro p
  rfl
* intro p
  rfl
calc
  embed (FiniteInstrumentComp.ofOperation ? d)
    (ScottMap.const (embed ? k)) =
  ((FiniteInstrumentComp.ofOperation ? d).bind
    fun _ => ?.bind ?).satisfiedTTTheory resultCode :=

```

```

    hleft
  _ = (((FiniteInstrumentComp.ofOperation ? d).bind fun _ => ?).bind
    ?).satisfiedTTTheory resultCode :=
    hassoc.symm
  _ = embed ((FiniteInstrumentComp.ofOperation ? d).bind fun _ => ?) k :=
    (embed_satisfied
      ((FiniteInstrumentComp.ofOperation ? d).bind fun _ => ?) ? k
      (fun p => hk _)).symm
  _ = embed
    ((FiniteInstrumentComp.ofOperation ? ()).bind fun _ => ?) k := by
      rw [h?]

theorem restrictedResult_internal_pauliX {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s t : ChannelConfig C} {value : C}
  (h : ChannelInternalStep s t)
  (hc : s.control = .term (.prim (.pauliX value)))
  (next : ChannelTree C t)
  (R : ChannelTreeRealization D_0 j_0 realize (ChannelTree.internal h next))
  (selectors : List Bool) (i : Nat)
  (? : HSemanticValue D_0 j_0 -> FiniteInstrumentComp 2 PUnit.{1})
  (k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2))
  (hk : forall d, k d = (? d).satisfiedTTTheory resultCode) :
  restrictedResult D_0 j_0 realize (ChannelTree.internal h next) R
    selectors i k =
    embed (FiniteInstrumentComp.ofOperation Qubit.pauliXOp
      (realize value))
      (ScottMap.const
        (restrictedResult D_0 j_0 realize next
          (internalChildRealization D_0 j_0 realize h next R)
          selectors i k)) := by
  have hop : channelInternalOperation s = Qubit.pauliXOp := by
    simp [channelInternalOperation, hc]
  have havail_iff :
    ResultAvailable (ChannelTree.internal h next) selectors i <->
    ResultAvailable next selectors i :=
    Iff.rfl
  by_cases havail :
    ResultAvailable (ChannelTree.internal h next) selectors i
  * have havailChild := havail_iff.mp havail
    rw [restrictedResult_eq_embed D_0 j_0 realize _ R selectors i k havail,
      embed_restricted_internal D_0 j_0 realize h next R selectors i, hop,
      restrictedResult_eq_embed D_0 j_0 realize next
        (internalChildRealization D_0 j_0 realize h next R)
        selectors i k havailChild,
      embed_ofOperation_const_embed Qubit.pauliXOp (realize value)
        (restrictedInstrument D_0 j_0 realize next
          (internalChildRealization D_0 j_0 realize h next R)
          selectors i)
      ? k hk]
  * have hunavailChild : not ResultAvailable next selectors i :=
    fun hc => havail (havail_iff.mpr hc)
    rw [restrictedResult_eq_bot D_0 j_0 realize _ R selectors i k havail,
      restrictedResult_eq_bot D_0 j_0 realize next
        (internalChildRealization D_0 j_0 realize h next R)
        selectors i k hunavailChild,
      embed_ofOperation_const_bot Qubit.pauliXOp (realize value)]

/-- On a well-scoped tree, changing a leaf realization does not change any
finite observation: `ValueRel` is functional on every terminal leaf. -/

```

```

theorem holds_restrictedInstrument_bind_iff_of_wellScoped {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} (tree : ChannelTree C s)
  (hscoped : ChannelConfig.WellScoped s)
  (R S : ChannelTreeRealization D_0 j_0 realize tree)
  (selectors : List Bool) (i : Nat)
  (? : HSemanticValue D_0 j_0 -> FiniteInstrumentComp 2 PUnit.{1})
  (token : TTObservationToken 2) :
  TTObservationToken.Holds resultCode token
    ((restrictedInstrument D_0 j_0 realize tree R selectors i).bind ?) <=>
    TTObservationToken.Holds resultCode token
    ((restrictedInstrument D_0 j_0 realize tree S selectors i).bind ?) := by
classical
let ? := restrictedInstrument D_0 j_0 realize tree R selectors i
let ? := restrictedInstrument D_0 j_0 realize tree S selectors i
have hvalue : forall o : ?.Outcome, ?.value o = ?.value o := by
  intro o
  apply valueRel_functional D_0 j_0 realize
    (tree.terminalValues_wellScoped hscoped o.1)
  * exact S.related o.1
  * exact R.related o.1
have htheory :
  (?.bind ?).satisfiedTTTheory resultCode =
  (?.bind ?).satisfiedTTTheory resultCode := by
  apply satisfiedTTTheory_eq_of_wpKraus_semEq
  intro P
  exact FiniteInstrumentComp.bind_wpKraus_congr_of_outcome_equiv
    ? ? (Equiv.refl _) (fun _ => rfl) hvalue ? P
constructor
* intro h
  apply (FiniteInstrumentComp.mem_satisfiedTTTheory
    resultCode (?.bind ?) token).mp
  rw [ <- htheory]
  exact (FiniteInstrumentComp.mem_satisfiedTTTheory
    resultCode (?.bind ?) token).2 h
* intro h
  apply (FiniteInstrumentComp.mem_satisfiedTTTheory
    resultCode (?.bind ?) token).mp
  rw [htheory]
  exact (FiniteInstrumentComp.mem_satisfiedTTTheory
    resultCode (?.bind ?) token).2 h

/-- Well-scoped trees make restricted results independent of the chosen
leaf realization. Measurement wrap uses a canonical leaf value, so this
recovers the child restricted result after projection. -/
theorem restrictedResult_eq_of_wellScoped {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} (tree : ChannelTree C s)
  (hscoped : ChannelConfig.WellScoped s)
  (R S : ChannelTreeRealization D_0 j_0 realize tree)
  (selectors : List Bool) (i : Nat)
  (? : HSemanticValue D_0 j_0 -> FiniteInstrumentComp 2 PUnit.{1})
  (k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2))
  (hk : forall d, k d = (? d).satisfiedTTTheory resultCode) :
  restrictedResult D_0 j_0 realize tree R selectors i k =
  restrictedResult D_0 j_0 realize tree S selectors i k := by
classical

```

```

by_cases havail : ResultAvailable tree selectors i
* rw [restrictedResult_eq_embed D_0 j_0 realize tree R selectors i k havail,
      restrictedResult_eq_embed D_0 j_0 realize tree S selectors i k havail]
have hR :=
  TTPhysicalEmbedding.embed_satisfied
    (restrictedInstrument D_0 j_0 realize tree R selectors i) ? k
    (fun _ => hk _)
have hS :=
  TTPhysicalEmbedding.embed_satisfied
    (restrictedInstrument D_0 j_0 realize tree S selectors i) ? k
    (fun _ => hk _)
rw [hR, hS]
apply RoundedTheory.ext
ext token
exact holds_restrictedInstrument_bind_iff_of_wellScoped D_0 j_0 realize
      tree hscoped R S selectors i ? token
* rw [restrictedResult_eq_bot D_0 j_0 realize tree R selectors i k havail,
      restrictedResult_eq_bot D_0 j_0 realize tree S selectors i k havail]

/-- At a finitely-presented continuation, restriction of an interior
probability node is exactly physical weighted aggregation of the two
restricted children. -/
theorem restrictedResult_probability_presented {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} {p : ?}
  {leftTerm rightTerm : Term (QubitPrimitive C)}
  (hp_0 : 0 < p) (hp_1 : p < 1)
  (left : ChannelTree C
    { s with
      control := .term leftTerm
      quantum := applyOperation
        (sourceProbabilityOperation p hp_0.le hp_1.le) s.quantum })
  (right : ChannelTree C
    { s with
      control := .term rightTerm
      quantum := applyOperation
        (sourceProbabilityOperation (1 - p)
          (sub_nonneg.mpr hp_1.le) (by linarith)) s.quantum })
  (R : ChannelTreeRealization D_0 j_0 realize
    (ChannelTree.probability hp_0 hp_1 left right))
  (selectors : List Bool) (i : Nat)
  (? : HSemanticValue D_0 j_0 -> FiniteInstrumentComp 2 PUnit.{1})
  (k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2))
  (hk : forall d, k d = (? d).satisfiedTTTheory resultCode) :
  restrictedResult D_0 j_0 realize
    (ChannelTree.probability hp_0 hp_1 left right) R selectors i k =
  TTWeightedAggregation.weightedResultScott p hp_0.le hp_1.le
    (restrictedResult D_0 j_0 realize left
      (probabilityLeftRealization D_0 j_0 realize hp_0 hp_1 left right R)
      selectors i k,
    restrictedResult D_0 j_0 realize right
      (probabilityRightRealization D_0 j_0 realize hp_0 hp_1 left right R)
      selectors i k) := by
classical
let leftR :=
  probabilityLeftRealization D_0 j_0 realize hp_0 hp_1 left right R
let rightR :=
  probabilityRightRealization D_0 j_0 realize hp_0 hp_1 left right R
let ?L := restrictedInstrument D_0 j_0 realize left leftR selectors i
let ?R := restrictedInstrument D_0 j_0 realize right rightR selectors i

```



```

let ?W := (FiniteInstrumentComp.weightedCoin (n := 2) p hp_0.le hp_1.le).bind
  (fun b => if b then ?R else ?L)
have havail_iff :
  ResultAvailable (ChannelTree.probability hp_0 hp_1 left right) selectors i <=>
    ResultAvailable left selectors i /\ ResultAvailable right selectors i :=
  Iff.rfl
by_cases hleft : ResultAvailable left selectors i
* by_cases hright : ResultAvailable right selectors i
  * rw [restrictedResult_eq_embed D_0 j_0 realize left leftR selectors i k hleft,
    restrictedResult_eq_embed D_0 j_0 realize right rightR selectors i k hright,
    restrictedResult_eq_embed D_0 j_0 realize
      (ChannelTree.probability hp_0 hp_1 left right) R selectors i k
      (havail_iff.mpr <hleft, hright>)]
  rw [embed_restricted_probability D_0 j_0 realize hp_0 hp_1 left right R
    selectors i]
  change embed ?W k =
    TTWeightedAggregation.weightedResultScott p hp_0.le hp_1.le
      (embed ?L k, embed ?R k)
  calc
    embed ?W k =
      (?W.bind ?).satisfiedTTTheory resultCode :=
      TTPhysicalEmbedding.embed_satisfied ?W ? k (fun _ => hk _)
    _ = ((?L.bind ?).weightedResult p hp_0.le hp_1.le
      (?R.bind ?)).satisfiedTTTheory resultCode := by
      have hassoc :=
        satisfiedTTTheory_bind_assoc
          (FiniteInstrumentComp.weightedCoin (n := 2) p hp_0.le hp_1.le)
          (fun b => if b then ?R else ?L) ?
      have hif : forall b : Bool,
        (if b then ?R else ?L).bind ? =
          if b then ?R.bind ? else ?L.bind ? := by
        intro b
        split_ifs <=> rfl
      change
        (((FiniteInstrumentComp.weightedCoin (n := 2) p hp_0.le hp_1.le).bind
          (fun b => if b then ?R else ?L)).bind ?).satisfiedTTTheory
          resultCode =
          ((?L.bind ?).weightedResult p hp_0.le hp_1.le
            (?R.bind ?)).satisfiedTTTheory resultCode
      rw [hassoc]
      congr 1
      exact congrArg
        ((FiniteInstrumentComp.weightedCoin (n := 2) p hp_0.le hp_1.le).bind)
        (funext hif)
    _ = TTWeightedAggregation.weightedResultScott p hp_0.le hp_1.le
      ((?L.bind ?).satisfiedTTTheory resultCode,
        (?R.bind ?).satisfiedTTTheory resultCode) :=
      (TTWeightedAggregation.weightedResultScott_satisfied_interior
        p hp_0 hp_1 (?L.bind ?) (?R.bind ?)).symm
    _ = TTWeightedAggregation.weightedResultScott p hp_0.le hp_1.le
      (embed ?L k, embed ?R k) := by
      rw [TTPhysicalEmbedding.embed_satisfied ?L ? k (fun _ => hk _),
        TTPhysicalEmbedding.embed_satisfied ?R ? k (fun _ => hk _)]
  * rw [restrictedResult_eq_bot D_0 j_0 realize right rightR selectors i k hright,
    TTWeightedAggregation.weightedResultScott_bot_right p hp_0 hp_1]
  apply restrictedResult_eq_bot
  exact fun h => hright (havail_iff.mp h).2
* rw [restrictedResult_eq_bot D_0 j_0 realize left leftR selectors i k hleft,
  TTWeightedAggregation.weightedResultScott_bot_left p hp_0 hp_1]
  apply restrictedResult_eq_bot
  exact fun h => hleft (havail_iff.mp h).1

/-- At a finitely-presented continuation, an available measurement node is

```

```

exactly finite physical measurement followed by the restricted children.
Unavailable nodes are covered separately by `restrictedResult_eq_bot`. -/
theorem restrictedResult_measurement_presented {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C → HSemanticValue D_0 j_0)
  {s : ChannelConfig C} {zeroValue oneValue : C}
  (zero : ChannelTree C
    { s with
      control := .value (.payload zeroValue)
      quantum := applyOperation (measurementOperation false) s.quantum })
  (one : ChannelTree C
    { s with
      control := .value (.payload oneValue)
      quantum := applyOperation (measurementOperation true) s.quantum })
  (R : ChannelTreeRealization D_0 j_0 realize
    (ChannelTree.measurement zero one))
  (selectors : List Bool) (i : Nat)
  (hzero : ResultAvailable zero selectors i)
  (hone : ResultAvailable one selectors i)
  (? : HSemanticValue D_0 j_0 → FiniteInstrumentComp 2 PUnit.{1})
  (k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2))
  (hk : forall d, k d = (? d).satisfiedTTTheory resultCode) :
restrictedResult D_0 j_0 realize
  (ChannelTree.measurement zero one) R selectors i k =
  ((Qubit.measureZComp.bind
    (fun b => if b then
      restrictedInstrument D_0 j_0 realize one
      (measurementOneRealization D_0 j_0 realize zero one R) selectors i
    else
      restrictedInstrument D_0 j_0 realize zero
      (measurementZeroRealization D_0 j_0 realize zero one R) selectors i)
    ).bind ?).satisfiedTTTheory resultCode := by
classical
let zeroR := measurementZeroRealization D_0 j_0 realize zero one R
let oneR := measurementOneRealization D_0 j_0 realize zero one R
let ?M := Qubit.measureZComp.bind
  (fun b => if b then
    restrictedInstrument D_0 j_0 realize one oneR selectors i
  else
    restrictedInstrument D_0 j_0 realize zero zeroR selectors i)
have havail_iff :
  ResultAvailable (ChannelTree.measurement zero one) selectors i <->
  ResultAvailable zero selectors i /\ ResultAvailable one selectors i :=
Iff.rfl
rw [restrictedResult_eq_embed D_0 j_0 realize
  (ChannelTree.measurement zero one) R selectors i k
  (havail_iff.mpr <hzero, hone>),
  embed_restricted_measurement D_0 j_0 realize zero one R selectors i]
change embed ?M k = (?M.bind ?).satisfiedTTTheory resultCode
exact TTPhysicalEmbedding.embed_satisfied ?M ? k (fun _ => hk _)

```

Lean 4 source (lines 4801–5200)

```

theorem ChannelInternalStep.not_prob {C : Type}
  {s t : ChannelConfig C} {p : ?}
  {left right : Term (QubitPrimitive C)}
  (h : ChannelInternalStep s t)
  (hc : s.control = .term (.prob p left right)) : False := by
cases h <|> cases hc

theorem ChannelExternalStep.not_prob {C : Type}

```

```

    {s t : ChannelConfig C} {b : Bool} {p : ?}
    {left right : Term (QubitPrimitive C)}
    (h : ChannelExternalStep s b t)
    (hc : s.control = .term (.prob p left right)) : False := by
cases h <;> cases hc

/-- Left child start after an interior source-probability split. -/
noncomputable def probLeftConfig {C : Type} (p : ?) (hp_0 : 0 <= p) (hp_1 : p <= 1)
  (left right : Term (QubitPrimitive C))
  (quantum : NormalizedDensity 2) : ChannelConfig C :=
{ initialChannelConfig (.prob p left right) quantum with
  control := .term left
  quantum := applyOperation (sourceProbabilityOperation p hp_0 hp_1)
    (initialChannelConfig (.prob p left right) quantum).quantum }

/-- Right child start after an interior source-probability split. -/
noncomputable def probRightConfig {C : Type} (p : ?) (hp_0 : 0 <= p) (hp_1 : p <= 1)
  (left right : Term (QubitPrimitive C))
  (quantum : NormalizedDensity 2) : ChannelConfig C :=
{ initialChannelConfig (.prob p left right) quantum with
  control := .term right
  quantum := applyOperation
    (sourceProbabilityOperation (1 - p)
      (sub_nonneg.mpr hp_1) (by linarith))
    (initialChannelConfig (.prob p left right) quantum).quantum }

noncomputable def wrapProb {C : Type} {p : ?} (hp_0 : 0 < p) (hp_1 : p < 1)
  (left right : Term (QubitPrimitive C))
  (quantum : NormalizedDensity 2)
  (leftChild : ChannelTree C
    (probLeftConfig p hp_0.le hp_1.le left right quantum))
  (rightChild : ChannelTree C
    (probRightConfig p hp_0.le hp_1.le left right quantum)) :
ChannelTree C (initialChannelConfig (.prob p left right) quantum) :=
ChannelTree.probability (s := initialChannelConfig (.prob p left right) quantum)
  hp_0 hp_1 leftChild rightChild

noncomputable def wrapProbZero {C : Type}
  (left right : Term (QubitPrimitive C))
  (quantum : NormalizedDensity 2)
  (rightChild : ChannelTree C
    { initialChannelConfig (.prob 0 left right) quantum with
      control := .term right
      quantum := applyOperation
        (sourceProbabilityOperation 1 zero_le_one (le_refl 1))
        (initialChannelConfig (.prob 0 left right) quantum).quantum }) :
ChannelTree C (initialChannelConfig (.prob 0 left right) quantum) :=
ChannelTree.probabilityZero
  (s := initialChannelConfig (.prob 0 left right) quantum) rightChild

noncomputable def wrapProbOne {C : Type}
  (left right : Term (QubitPrimitive C))
  (quantum : NormalizedDensity 2)
  (leftChild : ChannelTree C
    { initialChannelConfig (.prob 1 left right) quantum with
      control := .term left
      quantum := applyOperation
        (sourceProbabilityOperation 1 zero_le_one (le_refl 1))
        (initialChannelConfig (.prob 1 left right) quantum).quantum }) :
ChannelTree C (initialChannelConfig (.prob 1 left right) quantum) :=
ChannelTree.probabilityOne
  (s := initialChannelConfig (.prob 1 left right) quantum) leftChild

```

```

theorem wrapProb_depth {C : Type} {p : ?} (hp_0 : 0 < p) (hp_1 : p < 1)
  (left right : Term (QubitPrimitive C))
  (quantum : NormalizedDensity 2)
  (leftChild : ChannelTree C
    (probLeftConfig p hp_0.le hp_1.le left right quantum))
  (rightChild : ChannelTree C
    (probRightConfig p hp_0.le hp_1.le left right quantum)) :
  (wrapProb hp_0 hp_1 left right quantum leftChild rightChild).depth =
    max leftChild.depth rightChild.depth + 1 :=
rfl

theorem wrapProbZero_depth {C : Type}
  (left right : Term (QubitPrimitive C))
  (quantum : NormalizedDensity 2)
  (rightChild : ChannelTree C
    { initialChannelConfig (.prob 0 left right) quantum with
      control := .term right
      quantum := applyOperation
        (sourceProbabilityOperation 1 zero_le_one (le_refl 1))
        (initialChannelConfig (.prob 0 left right) quantum).quantum }) :
  (wrapProbZero left right quantum rightChild).depth =
    rightChild.depth + 1 :=
rfl

theorem wrapProbOne_depth {C : Type}
  (left right : Term (QubitPrimitive C))
  (quantum : NormalizedDensity 2)
  (leftChild : ChannelTree C
    { initialChannelConfig (.prob 1 left right) quantum with
      control := .term left
      quantum := applyOperation
        (sourceProbabilityOperation 1 zero_le_one (le_refl 1))
        (initialChannelConfig (.prob 1 left right) quantum).quantum }) :
  (wrapProbOne left right quantum leftChild).depth =
    leftChild.depth + 1 :=
rfl

/-- Endpoint `p = 0` retains only the live right child. -/
noncomputable def probabilityZeroRealization {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C}
  {leftTerm rightTerm : Term (QubitPrimitive C)}
  (right : ChannelTree C
    { s with
      control := .term rightTerm
      quantum := applyOperation
        (sourceProbabilityOperation 1 zero_le_one (le_refl 1))
        s.quantum })
  (R : ChannelTreeRealization D_0 j_0 realize
    (ChannelTree.probabilityZero (left := leftTerm) right)) :
  ChannelTreeRealization D_0 j_0 realize right where
  value := fun leaf => R.value (prependPhysical true leaf)
  related := fun o => R.related o

noncomputable def wrapProbabilityZeroRealization {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C}

```

```

{leftTerm rightTerm : Term (QubitPrimitive C)}
(right : ChannelTree C
  { s with
    control := .term rightTerm
    quantum := applyOperation
      (sourceProbabilityOperation 1 zero_le_one (le_refl 1))
    s.quantum })
(R : ChannelTreeRealization D_0 j_0 realize right) :
ChannelTreeRealization D_0 j_0 realize
  (ChannelTree.probabilityZero (left := leftTerm) right) where
value := fun leaf => R.value (dropPhysical leaf)
related := by
  intro o
  change ValueRel D_0 j_0 realize
    (right.instrument.value o).isTerminal.value
    (R.value (dropPhysical
      (prependPhysical true (right.instrument.value o))))
  simpa using R.related o

noncomputable def probabilityOneRealization {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C}
  {leftTerm rightTerm : Term (QubitPrimitive C)}
  (left : ChannelTree C
    { s with
      control := .term leftTerm
      quantum := applyOperation
        (sourceProbabilityOperation 1 zero_le_one (le_refl 1))
      s.quantum })
  (R : ChannelTreeRealization D_0 j_0 realize
    (ChannelTree.probabilityOne (right := rightTerm) left)) :
ChannelTreeRealization D_0 j_0 realize left where
value := fun leaf => R.value (prependPhysical false leaf)
related := fun o => R.related o

noncomputable def wrapProbabilityOneRealization {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C}
  {leftTerm rightTerm : Term (QubitPrimitive C)}
  (left : ChannelTree C
    { s with
      control := .term leftTerm
      quantum := applyOperation
        (sourceProbabilityOperation 1 zero_le_one (le_refl 1))
      s.quantum })
  (R : ChannelTreeRealization D_0 j_0 realize left) :
ChannelTreeRealization D_0 j_0 realize
  (ChannelTree.probabilityOne (right := rightTerm) left) where
value := fun leaf => R.value (dropPhysical leaf)
related := by
  intro o
  change ValueRel D_0 j_0 realize
    (left.instrument.value o).isTerminal.value
    (R.value (dropPhysical
      (prependPhysical false (left.instrument.value o))))
  simpa using R.related o

```

```

theorem embed_restricted_probabilityZero {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C}
  {leftTerm rightTerm : Term (QubitPrimitive C)}
  (right : ChannelTree C
    { s with
      control := .term rightTerm
      quantum := applyOperation
        (sourceProbabilityOperation 1 zero_le_one (le_refl 1))
        s.quantum })
  (R : ChannelTreeRealization D_0 j_0 realize
    (ChannelTree.probabilityZero (left := leftTerm) right))
  (selectors : List Bool) (i : Nat) :
  embed (restrictedInstrument D_0 j_0 realize
    (ChannelTree.probabilityZero (left := leftTerm) right) R
    selectors i) =
  embed (restrictedInstrument D_0 j_0 realize right
    (probabilityZeroRealization D_0 j_0 realize right R)
    selectors i) := by
  let ? := restrictedInstrument D_0 j_0 realize
    (ChannelTree.probabilityZero (left := leftTerm) right) R selectors i
  let ? := restrictedInstrument D_0 j_0 realize right
    (probabilityZeroRealization D_0 j_0 realize right R) selectors i
  refine embed_congr_of_outcome_equiv ? ? ?e ?hbranch ?hvalue
  * exact
    { toFun := fun p => <p.1, p.2>
      invFun := fun q => <q.1, q.2>
      left_inv := by
        intro p
        rcases p with <o, ho>
        rfl
      right_inv := by
        intro q
        rcases q with <o, ho>
        rfl }
  * intro p
    rfl
  * intro p
    rfl

theorem embed_restricted_probabilityOne {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C}
  {leftTerm rightTerm : Term (QubitPrimitive C)}
  (left : ChannelTree C
    { s with
      control := .term leftTerm
      quantum := applyOperation
        (sourceProbabilityOperation 1 zero_le_one (le_refl 1))
        s.quantum })
  (R : ChannelTreeRealization D_0 j_0 realize
    (ChannelTree.probabilityOne (right := rightTerm) left))
  (selectors : List Bool) (i : Nat) :
  embed (restrictedInstrument D_0 j_0 realize
    (ChannelTree.probabilityOne (right := rightTerm) left) R
    selectors i) =
  embed (restrictedInstrument D_0 j_0 realize left

```

```

      (probabilityOneRealization D_0 j_0 realize left R)
      selectors i) := by
let ? := restrictedInstrument D_0 j_0 realize
  (ChannelTree.probabilityOne (right := rightTerm) left) R selectors i
let ? := restrictedInstrument D_0 j_0 realize left
  (probabilityOneRealization D_0 j_0 realize left R) selectors i
refine embed_congr_of_outcome_equiv ? ? ?e ?hbranch ?hvalue
* exact
  { toFun := fun p => <p.1, p.2>
    invFun := fun q => <q.1, q.2>
    left_inv := by
      intro p
      rcases p with <o, ho>
      rfl
    right_inv := by
      intro q
      rcases q with <o, ho>
      rfl }
* intro p
  rfl
* intro p
  rfl

theorem restrictedResult_probabilityZero {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C}
  {leftTerm rightTerm : Term (QubitPrimitive C)}
  (right : ChannelTree C
    { s with
      control := .term rightTerm
      quantum := applyOperation
        (sourceProbabilityOperation 1 zero_le_one (le_refl 1))
        s.quantum })
  (R : ChannelTreeRealization D_0 j_0 realize
    (ChannelTree.probabilityZero (left := leftTerm) right))
  (selectors : List Bool) (i : Nat)
  (k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)) :
  restrictedResult D_0 j_0 realize
    (ChannelTree.probabilityZero (left := leftTerm) right) R
    selectors i k =
  restrictedResult D_0 j_0 realize right
    (probabilityZeroRealization D_0 j_0 realize right R)
    selectors i k := by
classical
let childR := probabilityZeroRealization D_0 j_0 realize right R
have havail_iff :
  ResultAvailable
    (ChannelTree.probabilityZero (left := leftTerm) right)
    selectors i <->
  ResultAvailable right selectors i :=
  Iff.rfl
by_cases havail :
  ResultAvailable
    (ChannelTree.probabilityZero (left := leftTerm) right)
    selectors i
* rw [restrictedResult_eq_embed D_0 j_0 realize _ R selectors i k havail,
  restrictedResult_eq_embed D_0 j_0 realize right childR selectors i k
    (havail_iff.mp havail),
  embed_restricted_probabilityZero]
* rw [restrictedResult_eq_bot D_0 j_0 realize _ R selectors i k havail,

```

```

restrictedResult_eq_bot D_0 j_0 realize right childR selectors i k
  (fun hc => havail (havail_iff.mpr hc))]]

theorem restrictedResult_probabilityOne {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C}
  {leftTerm rightTerm : Term (QubitPrimitive C)}
  (left : ChannelTree C
    { s with
      control := .term leftTerm
      quantum := applyOperation
        (sourceProbabilityOperation 1 zero_le_one (le_refl 1))
        s.quantum })
  (R : ChannelTreeRealization D_0 j_0 realize
    (ChannelTree.probabilityOne (right := rightTerm) left))
  (selectors : List Bool) (i : Nat)
  (k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)) :
  restrictedResult D_0 j_0 realize
    (ChannelTree.probabilityOne (right := rightTerm) left) R
    selectors i k =
  restrictedResult D_0 j_0 realize left
    (probabilityOneRealization D_0 j_0 realize left R)
    selectors i k := by
classical
let childR := probabilityOneRealization D_0 j_0 realize left R
have havail_iff :
  ResultAvailable
    (ChannelTree.probabilityOne (right := rightTerm) left)
    selectors i <->
  ResultAvailable left selectors i :=
  Iff.rfl
by_cases havail :
  ResultAvailable
    (ChannelTree.probabilityOne (right := rightTerm) left)
    selectors i
* rw [restrictedResult_eq_embed D_0 j_0 realize _ R selectors i k havail,
  restrictedResult_eq_embed D_0 j_0 realize left childR selectors i k
    (havail_iff.mp havail),
  embed_restricted_probabilityOne]
* rw [restrictedResult_eq_bot D_0 j_0 realize _ R selectors i k havail,
  restrictedResult_eq_bot D_0 j_0 realize left childR selectors i k
    (fun hc => havail (havail_iff.mpr hc))]]

/-- Invert a probability-zero tree at a general source configuration. -/
theorem restrictedResult_of_control_prob_zero {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C}
  (tree : ChannelTree C s)
  (R : ChannelTreeRealization D_0 j_0 realize tree)
  {left right : Term (QubitPrimitive C)}
  (hc : s.control = .term (.prob 0 left right))
  (selectors : List Bool) (i : Nat)
  (k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)) :
  restrictedResult D_0 j_0 realize tree R selectors i k <=
  sSup (channelTreeResults D_0 j_0 realize
    { s with
      control := .term right

```



```

        quantum := applyOperation
          (sourceProbabilityOperation 1 zero_le_one (le_refl 1))
          s.quantum }
    selectors i k) := by
cases tree with
| terminal hterm =>
  have := hterm.control_eq.symm.trans hc
  cases this
| internal h _ =>
  exact False.elim (ChannelInternalStep.not_prob h hc)
| external _ h _ =>
  exact False.elim (ChannelExternalStep.not_prob h hc)
| probability hp_0' _ _ =>

```

Lean 4 source (lines 5201–5600)

```

  have hp : (0 : ?) = 0 := rfl
  injection hc with hterm
  injection hterm with hp0
  exact (lt_irrefl (0 : ?) (hp0 |> hp_0')).elim
| @probabilityZero _ L R next =>
  injection hc with hterm
  injection hterm with _ hL hR
  subst hL
  subst hR
  rw [restrictedResult_probabilityZero]
  apply le_sSup
  exact <next.depth, next,
    probabilityZeroRealization D_0 j_0 realize next R, le_refl, rfl>
| probabilityOne _ =>
  injection hc with hterm
  injection hterm with hp01
  exact (one_ne_zero hp01).elim
| measurement _ _ =>
  cases hc

/-- Invert a probability-one tree at a general source configuration. -/
theorem restrictedResult_of_control_prob_one {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C}
  (tree : ChannelTree C s)
  (R : ChannelTreeRealization D_0 j_0 realize tree)
  {left right : Term (QubitPrimitive C)}
  (hc : s.control = .term (.prob 1 left right))
  (selectors : List Bool) (i : Nat)
  (k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)) :
  restrictedResult D_0 j_0 realize tree R selectors i k <=
    sSup (channelTreeResults D_0 j_0 realize
      { s with
        control := .term left
        quantum := applyOperation
          (sourceProbabilityOperation 1 zero_le_one (le_refl 1))
          s.quantum }
        selectors i k) := by
cases tree with
| terminal hterm =>
  have := hterm.control_eq.symm.trans hc
  cases this
| internal h _ =>
  exact False.elim (ChannelInternalStep.not_prob h hc)
| external _ h _ =>

```

```

    exact False.elim (ChannelExternalStep.not_prob h hc)
| probability _ hp_1' _ _ =>
    injection hc with hterm
    injection hterm with hp1
    exact (lt_irrefl (1 : ?) (hp1 |> hp_1')).elim
| probabilityZero _ =>
    injection hc with hterm
    injection hterm with hp10
    exact (zero_ne_one hp10).elim
| @probabilityOne _ L R next =>
    injection hc with hterm
    injection hterm with _ hL hR
    subst hL
    subst hR
    rw [restrictedResult_probabilityOne]
    apply le_sSup
    exact <next.depth, next,
      probabilityOneRealization D_0 j_0 realize next R, le_rfl, rfl>
| measurement _ _ =>
    cases hc

/-- Invert an interior probability tree at a presented continuation. -/
theorem restrictedResult_of_control_prob_presented {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C}
  (tree : ChannelTree C s)
  (R : ChannelTreeRealization D_0 j_0 realize tree)
  {p : ?} {left right : Term (QubitPrimitive C)}
  (hp_0 : 0 < p) (hp_1 : p < 1)
  (hc : s.control = .term (.prob p left right))
  (selectors : List Bool) (i : Nat)
  (? : HSemanticValue D_0 j_0 -> FiniteInstrumentComp 2 PUnit.{1})
  (k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2))
  (hk : forall d, k d = (? d).satisfiedTTTheory resultCode) :
  restrictedResult D_0 j_0 realize tree R selectors i k <=
    TTWeightedAggregation.weightedResultScott p hp_0.le hp_1.le
    (sSup (channelTreeResults D_0 j_0 realize
      { s with
        control := .term left
        quantum := applyOperation
          (sourceProbabilityOperation p hp_0.le hp_1.le) s.quantum }
      selectors i k),
    sSup (channelTreeResults D_0 j_0 realize
      { s with
        control := .term right
        quantum := applyOperation
          (sourceProbabilityOperation (1 - p)
            (sub_nonneg.mpr hp_1.le) (by linarith)) s.quantum }
      selectors i k)) := by
cases tree with
| terminal hterm =>
    have := hterm.control_eq.symm.trans hc
    cases this
| internal h _ =>
    exact False.elim (ChannelInternalStep.not_prob h hc)
| external _ h _ =>
    exact False.elim (ChannelExternalStep.not_prob h hc)
| probability hp_0' hp_1' leftT rightT =>
    have hp : p = p := rfl
    -- After cases, `hc` identifies the source weight with `p`.

```

```

cases hc
rw [restrictedResult_probability_presented D_0 j_0 realize
    hp_0' hp_1' leftT rightT R selectors i ? k hk]
exact
  (TTWeightedAggregation.weightedResultScott
   p hp_0.le hp_1.le).monotone
  <le_sSup <leftT.depth, leftT,
    probabilityLeftRealization D_0 j_0 realize hp_0' hp_1'
    leftT rightT R, le_rfl, rfl>,
  le_sSup <rightT.depth, rightT,
    probabilityRightRealization D_0 j_0 realize hp_0' hp_1'
    leftT rightT R, le_rfl, rfl>>
| probabilityZero _ =>
  injection hc with hterm
  injection hterm with hp0
  exact (ne_of_gt hp_0 hp0.symm).elim
| probabilityOne _ =>
  injection hc with hterm
  injection hterm with hp1
  exact (ne_of_lt hp_1 hp1.symm).elim
| measurement _ _ =>
  cases hc

theorem selectPath_prob {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEnternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (p : Prob) (left right : Term (QubitPrimitive C))
  (semanticEnv : Env (HSemanticValue D_0 j_0))
  (selectors : List Bool) (i : Nat)
  (k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)) :
  HardwareAdequacy.selectPath selectors
    (interp (hardwarePrimitive D_0 j_0 realize) (.prob p left right)
     semanticEnv) i k =
  TTContinuation.probChoice p
    (HardwareAdequacy.selectPath selectors
      (interp (hardwarePrimitive D_0 j_0 realize) left semanticEnv) i,
      HardwareAdequacy.selectPath selectors
        (interp (hardwarePrimitive D_0 j_0 realize) right semanticEnv)
        i) k := by
rw [interp_prob_apply, HardwareAdequacy.selectPath_apply_encode,
  TTContinuation.computation_prob_apply,
  HardwareAdequacy.selectPath_apply_encode,
  HardwareAdequacy.selectPath_apply_encode,
  TTContinuation.probChoice_apply]

theorem selectPath_prob_zero {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEnternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (left right : Term (QubitPrimitive C))
  (semanticEnv : Env (HSemanticValue D_0 j_0))
  (selectors : List Bool) (i : Nat)
  (k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)) :
  HardwareAdequacy.selectPath selectors
    (interp (hardwarePrimitive D_0 j_0 realize) (.prob 0 left right)
     semanticEnv) i k =
  HardwareAdequacy.selectPath selectors
    (interp (hardwarePrimitive D_0 j_0 realize) right semanticEnv) i k := by
rw [selectPath_prob, TTContinuation.probChoice_zero]

```

```

theorem selectPath_prob_one {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C → HSemanticValue D_0 j_0)
  (left right : Term (QubitPrimitive C))
  (semanticEnv : Env (HSemanticValue D_0 j_0))
  (selectors : List Bool) (i : Nat)
  (k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)) :
  HardwareAdequacy.selectPath selectors
    (interp (hardwarePrimitive D_0 j_0 realize) (.prob 1 left right)
      semanticEnv) i k =
    HardwareAdequacy.selectPath selectors
      (interp (hardwarePrimitive D_0 j_0 realize) left semanticEnv) i k := by
  rw [selectPath_prob, TTContinuation.probChoice_one]

theorem applyOperation_sourceProbability_of_one
  {p : ?} (hp_0 : 0 ≤ p) (hp_1 : p ≤ 1) (hp : p = 1)
  (? : SubNormalizedDensity 2) :
  applyOperation (sourceProbabilityOperation p hp_0 hp_1) ? = ? := by
  subst hp
  exact applyOperation_sourceProbability_one ?

theorem applyOperation_sourceProbability_one_initial {C : Type}
  (left right : Term (QubitPrimitive C))
  (quantum : NormalizedDensity 2) :
  applyOperation
    (sourceProbabilityOperation 1 zero_le_one (le_refl 1))
    (initialChannelConfig (.prob 0 left right) quantum).quantum =
    (initialChannelConfig right quantum).quantum := by
  apply SubNormalizedDensity.ext
  rw [applyOperation_sourceProbability_one]
  rfl

theorem probRightConfig_zero_eq {C : Type}
  (left right : Term (QubitPrimitive C))
  (quantum : NormalizedDensity 2) :
  probRightConfig 0 (le_refl 0) zero_le_one left right quantum =
  initialChannelConfig right quantum := by
  unfold probRightConfig
  apply ChannelConfig.ext
  * rfl
  * rfl
  * rfl
  * exact applyOperation_sourceProbability_of_one
    (sub_nonneg.mpr (zero_le_one : (0 : ?) ≤ 1))
    (by linarith : (1 - 0 : ?) ≤ 1) (sub_zero 1)
    (initialChannelConfig (.prob 0 left right) quantum).quantum

theorem probLeftConfig_one_eq {C : Type}
  (left right : Term (QubitPrimitive C))
  (quantum : NormalizedDensity 2) :
  probLeftConfig 1 zero_le_one (le_refl 1) left right quantum =
  initialChannelConfig left quantum := by
  unfold probLeftConfig
  apply ChannelConfig.ext
  * rfl
  * rfl
  * rfl
  * apply SubNormalizedDensity.ext
  rw [applyOperation_sourceProbability_one]
  rfl

```

```

/-- Physical weighted bind of two restricted children, used only to name the
folded interior probability instrument. Lattice join is never used. -/
theorem embed_restricted_prob_bind {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} {p : ?}
  {leftTerm rightTerm : Term (QubitPrimitive C)}
  (hp_0 : 0 < p) (hp_1 : p < 1)
  (left : ChannelTree C
    { s with
      control := .term leftTerm
      quantum := applyOperation
        (sourceProbabilityOperation p hp_0.le hp_1.le) s.quantum })
  (right : ChannelTree C
    { s with
      control := .term rightTerm
      quantum := applyOperation
        (sourceProbabilityOperation (1 - p)
          (sub_nonneg.mpr hp_1.le) (by linarith)) s.quantum })
  (R : ChannelTreeRealization D_0 j_0 realize
    (ChannelTree.probability hp_0 hp_1 left right))
  (selectors : List Bool) (i : Nat) :
  embed (restrictedInstrument D_0 j_0 realize
    (ChannelTree.probability hp_0 hp_1 left right) R selectors i) =
  embed ((probabilityInstrument p hp_0.le hp_1.le).bind
    (fun b => if b then
      restrictedInstrument D_0 j_0 realize right
        (probabilityRightRealization D_0 j_0 realize hp_0 hp_1 left right R)
        selectors i
    else
      restrictedInstrument D_0 j_0 realize left
        (probabilityLeftRealization D_0 j_0 realize hp_0 hp_1 left right R)
        selectors i)) := by
  simp [FiniteInstrumentComp.weightedResult] using
  (embed_restricted_probability D_0 j_0 realize hp_0 hp_1 left right R
    selectors i).trans
  (embed_congr_of_outcome_equiv
    ((FiniteInstrumentComp.weightedCoin (n := 2) p hp_0.le hp_1.le).bind
      (fun b => if b then
        restrictedInstrument D_0 j_0 realize right
          (probabilityRightRealization D_0 j_0 realize hp_0 hp_1 left right R)
          selectors i
      else
        restrictedInstrument D_0 j_0 realize left
          (probabilityLeftRealization D_0 j_0 realize hp_0 hp_1 left right R)
          selectors i))
    ((probabilityInstrument p hp_0.le hp_1.le).bind
      (fun b => if b then
        restrictedInstrument D_0 j_0 realize right
          (probabilityRightRealization D_0 j_0 realize hp_0 hp_1 left right R)
          selectors i
      else
        restrictedInstrument D_0 j_0 realize left
          (probabilityLeftRealization D_0 j_0 realize hp_0 hp_1 left right R)
          selectors i))
    { toFun := id
      invFun := id
      left_inv := fun _ => rfl
      right_inv := fun _ => rfl }
  (by
    intro q

```

```

      rcases q with <b, o>
      cases b <;> rfl)
    (by
      intro q
      rcases q with <b, o>
      cases b <;> rfl))

theorem ChannelTreeCompleteness.congr {C : Type}
  {D_0 : QDomain.{0}}
  {j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier)}
  {realize : C -> HSemanticValue D_0 j_0}
  {start start' : ChannelConfig C}
  {denotation denotation' : HSemanticComp D_0 j_0}
  (hstart : start = start') (hden : denotation = denotation')
  (h : ChannelTreeCompleteness D_0 j_0 realize start denotation) :
  ChannelTreeCompleteness D_0 j_0 realize start' denotation' := by
  subst hstart
  subst hden
  exact h

theorem PresentedChannelTreeCompleteness.congr {C : Type}
  {D_0 : QDomain.{0}}
  {j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier)}
  {realize : C -> HSemanticValue D_0 j_0}
  {start start' : ChannelConfig C}
  {denotation denotation' : HSemanticComp D_0 j_0}
  (hstart : start = start') (hden : denotation = denotation')
  (h : PresentedChannelTreeCompleteness D_0 j_0 realize start denotation) :
  PresentedChannelTreeCompleteness D_0 j_0 realize start' denotation' := by
  subst hstart
  subst hden
  exact h

/-- Endpoint completeness at weight zero: the live right child is copied,
and the discarded left branch contributes no physical observation. -/
theorem prob_zero_channelTreeCompleteness {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (left right : Term (QubitPrimitive C))
  (quantum : NormalizedDensity 2)
  (semanticEnv : Env (HSemanticValue D_0 j_0))
  (hright : ChannelTreeCompleteness D_0 j_0 realize
    (initialChannelConfig right quantum)
    (interp (hardwarePrimitive D_0 j_0 realize) right semanticEnv)) :
  ChannelTreeCompleteness D_0 j_0 realize
    (initialChannelConfig (.prob 0 left right) quantum)
    (interp (hardwarePrimitive D_0 j_0 realize) (.prob 0 left right)
      semanticEnv) where
  selected_result_eq_channelTree_sup := by
  intro selectors i k
  have hright' :=
    ChannelTreeCompleteness.congr
    (show
      { initialChannelConfig (.prob 0 left right) quantum with
        control := .term right
        quantum := applyOperation
          (sourceProbabilityOperation 1 zero_le_one (le_refl 1))
          (initialChannelConfig (.prob 0 left right) quantum).quantum } =
        initialChannelConfig right quantum from

```

```

      ChannelConfig.ext rfl rfl rfl
      (applyOperation_sourceProbability_one_initial left right quantum)).symm
    rfl hright
  rw [selectPath_prob_zero,
    hright'.selected_result_eq_channelTree_sup]
  apply le_antisymm
  * apply sSup_le
    rintro T <fuel, child, R, hdepth, rfl>
    apply le_sSup
    refine <fuel + 1, wrapProbZero left right quantum child,
      wrapProbabilityZeroRealization D_0 j_0 realize
        (s := initialChannelConfig (.prob 0 left right) quantum)
        (leftTerm := left) (rightTerm := right) child R, ?, ?_>
  * simp [wrapProbZero_depth] using Nat.succ_le_succ hdepth
  * exact
    (restrictedResult_probabilityZero D_0 j_0 realize child
      (wrapProbabilityZeroRealization D_0 j_0 realize
        (s := initialChannelConfig (.prob 0 left right) quantum)
        (leftTerm := left) (rightTerm := right) child R)
      selectors i k).symm
  * apply sSup_le
    rintro T <_, tree, R, _, rfl>
    have hle :=
      restrictedResult_of_control_prob_zero D_0 j_0 realize tree R rfl
      selectors i k
    exact hle

/-- Endpoint completeness at weight one: the live left child is copied. -/
theorem prob_one_channelTreeCompleteness {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (left right : Term (QubitPrimitive C))
  (quantum : NormalizedDensity 2)
  (semanticEnv : Env (HSemanticValue D_0 j_0))
  (hleft : ChannelTreeCompleteness D_0 j_0 realize

```

Lean 4 source (lines 5601–6000)

```

  (initialChannelConfig left quantum)
  (interp (hardwarePrimitive D_0 j_0 realize) left semanticEnv)) :
ChannelTreeCompleteness D_0 j_0 realize
  (initialChannelConfig (.prob 1 left right) quantum)
  (interp (hardwarePrimitive D_0 j_0 realize) (.prob 1 left right)
    semanticEnv) where
selected_result_eq_channelTree_sup := by
  intro selectors i k
  have hleft' :=
    ChannelTreeCompleteness.congr
      (show
        { initialChannelConfig (.prob 1 left right) quantum with
          control := .term left
          quantum := applyOperation
            (sourceProbabilityOperation 1 zero_le_one (le_refl 1))
            (initialChannelConfig (.prob 1 left right) quantum).quantum } =
          initialChannelConfig left quantum from
        ChannelConfig.ext rfl rfl rfl (by
          apply SubNormalizedDensity.ext
          rw [applyOperation_sourceProbability_one]
          rfl)).symm
        rfl hleft
      rw [selectPath_prob_one, hleft'.selected_result_eq_channelTree_sup]
    apply le_antisymm

```

```

* apply sSup_le
  rintro T <fuel, child, R, hdepth, rfl>
  apply le_sSup
  refine <fuel + 1, wrapProbOne left right quantum child,
    wrapProbabilityOneRealization D_0 j_0 realize
      (s := initialChannelConfig (.prob 1 left right) quantum)
      (leftTerm := left) (rightTerm := right) child R, ?_, ?_>
* simp [wrapProbOne_depth] using Nat.succ_le_succ hdepth
* exact
  (restrictedResult_probabilityOne D_0 j_0 realize child
    (wrapProbabilityOneRealization D_0 j_0 realize
      (s := initialChannelConfig (.prob 1 left right) quantum)
      (leftTerm := left) (rightTerm := right) child R)
    selectors i k).symm
* apply sSup_le
  rintro T <_, tree, R, _, rfl>
  have hle :=
    restrictedResult_of_control_prob_one D_0 j_0 realize tree R rfl
    selectors i k
  exact hle

/-- Interior probabilistic choice, at a finitely presented continuation, is
the physical weighted combination of the two child-tree suprema. -/
theorem prob_channelTreeCompleteness_presented {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (p : ?) (hp_0 : 0 < p) (hp_1 : p < 1)
  (left right : Term (QubitPrimitive C))
  (quantum : NormalizedDensity 2)
  (semanticEnv : Env (HSemanticValue D_0 j_0))
  (hleft : ChannelTreeCompleteness D_0 j_0 realize
    (probLeftConfig p hp_0.le hp_1.le left right quantum)
    (interp (hardwarePrimitive D_0 j_0 realize) left semanticEnv))
  (hright : ChannelTreeCompleteness D_0 j_0 realize
    (probRightConfig p hp_0.le hp_1.le left right quantum)
    (interp (hardwarePrimitive D_0 j_0 realize) right semanticEnv)) :
  PresentedChannelTreeCompleteness D_0 j_0 realize
    (initialChannelConfig (.prob p left right) quantum)
    (interp (hardwarePrimitive D_0 j_0 realize) (.prob p left right)
      semanticEnv) where
selected_result_eq_channelTree_sup_presented := by
  intro selectors i ? k hk
  have hpI : 0 <= p /\ p <= 1 := <hp_0.le, hp_1.le>
  rw [selectPath_prob, TTContinuation.probChoice_apply, dif_pos hpI,
    hleft.selected_result_eq_channelTree_sup,
    hright.selected_result_eq_channelTree_sup]
  let SL :=
    channelTreeResults D_0 j_0 realize
      (probLeftConfig p hp_0.le hp_1.le left right quantum) selectors i k
  let SR :=
    channelTreeResults D_0 j_0 realize
      (probRightConfig p hp_0.le hp_1.le left right quantum) selectors i k
  refine le_antisymm ?_ ?_
* by_cases hL : SL.Nonempty
* by_cases hR : SR.Nonempty
  * rw [TTWeightedAggregation.weightedResultScott_sSup_product
    p hp_0.le hp_1.le SL SR hL hR]
  apply sSup_le
  rintro _ <<TL, TR>, <<fuelL, leftT, leftR, hdepthL, rfl>,
    <fuelR, rightT, rightR, hdepthR, rfl>>, rfl>
  apply le_sSup

```



```

    refine <max fuelL fuelR + 1,
      wrapProb hp_0 hp_1 left right quantum leftT rightT,
      wrapProbabilityRealization D_0 j_0 realize hp_0 hp_1 leftT rightT
      leftR rightR, ?_, ?_>
  * simp [wrapProb_depth]
  omega
  * exact
    (restrictedResult_probability_presented D_0 j_0 realize hp_0 hp_1
      leftT rightT
      (wrapProbabilityRealization D_0 j_0 realize hp_0 hp_1
        leftT rightT leftR rightR)
      selectors i ? k hk).symm
  * have hbot :
    TTWeightedAggregation.weightedResultScott p hp_0.le hp_1.le
      (sSup SL, sSup SR) = False := by
    have : sSup SR = False := by
    have hempty : SR = {} :=
      Set.not_nonempty_iff_eq_empty.mp hR
    rw [hempty, sSup_empty]
    rw [this, TTWeightedAggregation.weightedResultScott_bot_right
      p hp_0 hp_1]
    rw [hbot]
    exact bot_le
  * have hbot :
    TTWeightedAggregation.weightedResultScott p hp_0.le hp_1.le
      (sSup SL, sSup SR) = False := by
    have : sSup SL = False := by
    have hempty : SL = {} :=
      Set.not_nonempty_iff_eq_empty.mp hL
    rw [hempty, sSup_empty]
    rw [this, TTWeightedAggregation.weightedResultScott_bot_left
      p hp_0 hp_1]
    rw [hbot]
    exact bot_le
  * apply sSup_le
  rintro T <_, tree, R, _, rfl>
  have hle :=
    restrictedResult_of_control_prob_presented D_0 j_0 realize tree R
      hp_0 hp_1 rfl selectors i ? k hk
  have hL :
    { initialChannelConfig (.prob p left right) quantum with
      control := .term left
      quantum := applyOperation
        (sourceProbabilityOperation p hp_0.le hp_1.le)
        (initialChannelConfig (.prob p left right) quantum).quantum } =
      probLeftConfig p hp_0.le hp_1.le left right quantum := by
    apply ChannelConfig.ext <;> rfl
  have hR :
    { initialChannelConfig (.prob p left right) quantum with
      control := .term right
      quantum := applyOperation
        (sourceProbabilityOperation (1 - p)
          (sub_nonneg.mpr hp_1.le) (by linarith))
        (initialChannelConfig (.prob p left right) quantum).quantum } =
      probRightConfig p hp_0.le hp_1.le left right quantum := by
    apply ChannelConfig.ext <;> rfl
  simpa [hL, hR] using hle

theorem prob_returns_zero_channelTreeCompleteness {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEnternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)

```

```

(leftValue rightValue : C) (quantum : NormalizedDensity 2)
(semanticEnv : Env (HSemanticValue D_0 j_0)) :
ChannelTreeCompleteness D_0 j_0 realize
  (initialChannelConfig
    (.prob 0 (.prim (.ret leftValue)) (.prim (.ret rightValue)))
    quantum)
  (interp (hardwarePrimitive D_0 j_0 realize)
    (.prob 0 (.prim (.ret leftValue)) (.prim (.ret rightValue)))
    semanticEnv) :=
prob_zero_channelTreeCompleteness D_0 j_0 realize _ _ quantum semanticEnv
(return_channelTreeCompleteness D_0 j_0 realize rightValue quantum
  semanticEnv)

theorem prob_returns_one_channelTreeCompleteness {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (leftValue rightValue : C) (quantum : NormalizedDensity 2)
  (semanticEnv : Env (HSemanticValue D_0 j_0)) :
ChannelTreeCompleteness D_0 j_0 realize
  (initialChannelConfig
    (.prob 1 (.prim (.ret leftValue)) (.prim (.ret rightValue)))
    quantum)
  (interp (hardwarePrimitive D_0 j_0 realize)
    (.prob 1 (.prim (.ret leftValue)) (.prim (.ret rightValue)))
    semanticEnv) :=
prob_one_channelTreeCompleteness D_0 j_0 realize _ _ quantum semanticEnv
(return_channelTreeCompleteness D_0 j_0 realize leftValue quantum
  semanticEnv)

/-- Compositional interior probability at the presented-continuation
boundary, plus exact endpoint completeness for every `0 <= p <= 1`.
Interior weights remain physical coin aggregation, never lattice join. -/
theorem prob_channelTreeCompleteness {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (p : ?) (hp_0 : 0 <= p) (hp_1 : p <= 1)
  (left right : Term (QubitPrimitive C))
  (quantum : NormalizedDensity 2)
  (semanticEnv : Env (HSemanticValue D_0 j_0))
  (hleft : ChannelTreeCompleteness D_0 j_0 realize
    (if p = 0 then initialChannelConfig right quantum
      else if p = 1 then initialChannelConfig left quantum
      else probLeftConfig p hp_0 hp_1 left right quantum)
    (interp (hardwarePrimitive D_0 j_0 realize)
      (if p = 0 then right else left) semanticEnv))
  (hright : ChannelTreeCompleteness D_0 j_0 realize
    (if p = 1 then initialChannelConfig left quantum
      else if p = 0 then initialChannelConfig right quantum
      else probRightConfig p hp_0 hp_1 left right quantum)
    (interp (hardwarePrimitive D_0 j_0 realize)
      (if p = 1 then left else right) semanticEnv)) :
PresentedChannelTreeCompleteness D_0 j_0 realize
  (initialChannelConfig (.prob p left right) quantum)
  (interp (hardwarePrimitive D_0 j_0 realize) (.prob p left right)
    semanticEnv) := by
by_cases hz : p = 0
* subst p
exact
  (prob_zero_channelTreeCompleteness D_0 j_0 realize left right quantum

```

```

      semanticEnv (by simp using hright)).toPresented
* by_cases ho : p = 1
* subst p
  exact
    (prob_one_channelTreeCompleteness D_0 j_0 realize left right quantum
      semanticEnv (by simp using hleft)).toPresented
* have hp_0' : 0 < p := lt_of_le_of_ne hp_0 (Ne.symm hz)
  have hp_1' : p < 1 := lt_of_le_of_ne hp_1 ho
  exact
    prob_channelTreeCompleteness_presented D_0 j_0 realize p hp_0' hp_1'
      left right quantum semanticEnv (by simp [hz, ho] using hleft)
      (by simp [hz, ho] using hright)

/-- Endpoint probabilistic returns are exactly complete. Interior weights
use the compositional presented theorem once each scaled child is known
to be complete; the zero-weight branch is never replaced by lattice join. -/
theorem prob_returns_channelTreeCompleteness {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (p : ?) (hp : p = 0 \ / p = 1)
  (leftValue rightValue : C) (quantum : NormalizedDensity 2)
  (semanticEnv : Env (HSemanticValue D_0 j_0)) :
  ChannelTreeCompleteness D_0 j_0 realize
    (initialChannelConfig
      (.prob p (.prim (.ret leftValue)) (.prim (.ret rightValue)))
      quantum)
    (interp (hardwarePrimitive D_0 j_0 realize)
      (.prob p (.prim (.ret leftValue)) (.prim (.ret rightValue)))
      semanticEnv) := by
  rcases hp with rfl | rfl
* exact prob_returns_zero_channelTreeCompleteness D_0 j_0 realize
  leftValue rightValue quantum semanticEnv
* exact prob_returns_one_channelTreeCompleteness D_0 j_0 realize
  leftValue rightValue quantum semanticEnv

/-- Closed-term TT adequacy from the repaired channel-tree completeness
statement. -/
theorem initialConfig_channel_tree_token_adequacy_iff {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (code : Term (QubitPrimitive C))
  (quantum : NormalizedDensity 2)
  (semanticEnv : Env (HSemanticValue D_0 j_0))
  (hcomplete : ChannelTreeCompleteness D_0 j_0 realize
    (initialChannelConfig code quantum)
    (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv))
  (selectors : List Bool)
  (? : HSemanticValue D_0 j_0 -> FiniteInstrumentComp 2 PUnit.{1})
  (k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2))
  (hk : forall d, k d = (? d).satisfiedTTTheory resultCode)
  (i : Nat) (token : TTObservationToken 2) :
  token in HardwareAdequacy.selectPath selectors
    (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv) i k <=>
  exists fuel, exists (tree : ChannelTree C
    (initialChannelConfig code quantum))
    (R : ChannelTreeRealization D_0 j_0 realize tree),
    tree.depth <= fuel /\
    ResultAvailable tree selectors i /\
    TTObservationToken.Holds resultCode token

```

```

      ((restrictedInstrument D_0 j_0 realize tree R selectors i).bind ?) := by
classical
rw [hcomplete.selected_result_eq_channelTree_sup selectors i k,
  RoundedTheory.mem_sSup]
constructor
* rintro <_, <fuel, tree, R, hdepth, rfl>, htoken>
  by_cases havail : ResultAvailable tree selectors i
  * refine <fuel, tree, R, hdepth, havail, ?_>
    apply (token_of_restrictedInstrument D_0 j_0 realize tree R selectors i
      ? k (fun o => hk _) token).1
    rw [restrictedResult_eq_embed D_0 j_0 realize tree R selectors i k havail]
    at htoken
    exact htoken
  * rw [restrictedResult_eq_bot D_0 j_0 realize tree R selectors i k havail]
    at htoken
    have hfalse : False := by
      rw [ <- sSup_empty, RoundedTheory.mem_sSup] at htoken
      simp using htoken
    exact hfalse.elim
* rintro <fuel, tree, R, hdepth, havail, htoken>
  refine <restrictedResult D_0 j_0 realize tree R selectors i k, ?_, ?_>
  * exact <fuel, tree, R, hdepth, rfl>
  * rw [restrictedResult_eq_embed D_0 j_0 realize tree R selectors i k havail]
    exact (token_of_restrictedInstrument D_0 j_0 realize tree R selectors i
      ? k (fun o => hk _) token).2 htoken

/-- Recursive denotations still admit the finite Scott approximants needed by
a fuel induction for `ChannelTreeCompleteness`. -/
theorem recLambdaValue_eq_iSup_channel_finite
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (self arg : Name)
  (body : ScottMap (Env (HSemanticValue D_0 j_0)) (HSemanticComp D_0 j_0))
  (? : Env (HSemanticValue D_0 j_0)) :
  recLambdaValue (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0) self arg body ? =
    bigcup fuel, ScottFixApproximation.iterateBot
      (recFunctional (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0) self arg body ?) fuel :=
  ScottFixApproximation.fix_eq_iSup_iterateBot _

/-! ## Application, stack bind, and the related-state fundamental lemma -/

/-- Application installs its argument frame at the active coordinate. -/
theorem path_channel_config_application {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  {realize : C -> HSemanticValue D_0 j_0}
  {s : ChannelConfig C} {fn arg : Term (QubitPrimitive C)}
  {active : Nat} {observedStack : ObservedStack C}
  {finalK : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)}
  {result : TTResult 2}
  (hrel : PathChannelConfigRel D_0 j_0 realize
    {s with control := .term (.app fn arg)}
    active observedStack finalK result) :
  PathChannelConfigRel D_0 j_0 realize
    {s with
      control := .term fn
      stack := .argument arg s.env :: s.stack}
    active ((.argument arg s.env, active) :: observedStack)
    finalK result := by

```

```

rcases hrel with <herase, current, currentK, hcontrol, hstack, hresult>
cases hcontrol with
| term _ _ semanticEnv henv =>
  refine <by simp [herase], interp (hardwarePrimitive D_0 j_0 realize) fn
    semanticEnv, _, ControlRel.term fn s.env semanticEnv henv,
    PathStackRel.argument arg s.env semanticEnv active observedStack
    currentK henv hstack, ?_>
  rw [hresult, interp_app_apply]
  rfl

/-- An explicit external choice consumes one branch coordinate only from the
active control; saved frame coordinates remain unchanged. -/
theorem path_channel_config_externalSelect {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEternalContinuationPower 2)) D_0.carrier))
  {realize : C -> HSemanticValue D_0 j_0}
  {s : ChannelConfig C} {selected : Bool}
  {left right : Term (QubitPrimitive C)}
  {childCoordinate : Nat} {observedStack : ObservedStack C}
  {finalK : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)}
  {result : TTResult 2}
  (hrel : PathChannelConfigRel D_0 j_0 realize
    {s with control := .term (.extern left right)}
    (HardwareAdequacy.branchCoordinate selected childCoordinate)
    observedStack finalK result) :
  PathChannelConfigRel D_0 j_0 realize
    {s with control := .term (if selected then right else left)}
    childCoordinate observedStack finalK result := by
rcases hrel with <herase, current, currentK, hcontrol, hstack, hresult>
cases hcontrol with
| term _ _ semanticEnv henv =>
  refine <herase, interp (hardwarePrimitive D_0 j_0 realize)
    (if selected then right else left) semanticEnv, currentK,
    ControlRel.term _ s.env semanticEnv henv, hstack, ?_>
  rw [hresult]
  exact selectPath_extern_coordinate D_0 j_0 realize left right semanticEnv
    selected childCoordinate currentK

theorem path_channel_config_probabilityZero {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEternalContinuationPower 2)) D_0.carrier))
  {realize : C -> HSemanticValue D_0 j_0}
  {s : ChannelConfig C} {left right : Term (QubitPrimitive C)}
  {active : Nat} {observedStack : ObservedStack C}
  {finalK : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)}
  {result : TTResult 2}
  (hrel : PathChannelConfigRel D_0 j_0 realize
    {s with control := .term (.prob 0 left right)}
    active observedStack finalK result) :
  PathChannelConfigRel D_0 j_0 realize
    {s with
      control := .term right
      quantum := applyOperation
        (sourceProbabilityOperation 1 zero_le_one (le_refl 1)) s.quantum}
    active observedStack finalK result := by
rcases hrel with <herase, current, currentK, hcontrol, hstack, hresult>
cases hcontrol with
| term _ _ semanticEnv henv =>
  refine <herase,

```

Lean 4 source (lines 6001–6400)

```

    interp (hardwarePrimitive D_0 j_0 realize) right semanticEnv,
    currentK, ControlRel.term right s.env semanticEnv henv, hstack, ?_>
rw [hresult]
exact selectPath_prob_zero D_0 j_0 realize left right semanticEnv
[] active currentK

theorem path_channel_config_probabilityOne {C : Type}
(D_0 : QDomain.{0})
(j_0 : IsContinuousLatticeProjection D_0.carrier
(QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
{realize : C -> HSemanticValue D_0 j_0}
{s : ChannelConfig C} {left right : Term (QubitPrimitive C)}
{active : Nat} {observedStack : ObservedStack C}
{finalK : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)}
{result : TTResult 2}
(hrel : PathChannelConfigRel D_0 j_0 realize
{s with control := .term (.prob 1 left right)}
active observedStack finalK result) :
PathChannelConfigRel D_0 j_0 realize
{s with
control := .term left
quantum := applyOperation
(sourceProbabilityOperation 1 zero_le_one (le_refl 1)) s.quantum}
active observedStack finalK result := by
rcases hrel with <herase, current, currentK, hcontrol, hstack, hresult>
cases hcontrol with
| term _ _ semanticEnv henv =>
refine <herase,
interp (hardwarePrimitive D_0 j_0 realize) left semanticEnv,
currentK, ControlRel.term left s.env semanticEnv henv, hstack, ?_>
rw [hresult]
exact selectPath_prob_one D_0 j_0 realize left right semanticEnv
[] active currentK

/-- Returning a function restores the coordinate saved by its argument
frame and installs the corresponding function frame at that coordinate. -/
theorem path_channel_config_evaluateArgument {C : Type}
(D_0 : QDomain.{0})
(j_0 : IsContinuousLatticeProjection D_0.carrier
(QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
{realize : C -> HSemanticValue D_0 j_0}
{s : ChannelConfig C} {fn : RuntimeValue C}
{arg : Term (QubitPrimitive C)} {callEnv : RuntimeEnv C}
{rest : EvalStack C} {active saved : Nat}
{observedRest : ObservedStack C}
{finalK : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)}
{result : TTResult 2}
(hrel : PathChannelConfigRel D_0 j_0 realize
{s with
control := .value fn
stack := .argument arg callEnv :: rest}
active ((.argument arg callEnv, saved) :: observedRest)
finalK result) :
PathChannelConfigRel D_0 j_0 realize
{s with
control := .term arg
env := callEnv
stack := .function fn :: rest}
saved ((.function fn, saved) :: observedRest) finalK result := by
rcases hrel with <herase, current, currentK, hcontrol, hstack, hresult>
cases hcontrol with
| value _ f _ hfn =>
cases hstack with

```

```

| argument _ _ semanticEnv _ _ restK henv hrest =>
  have heraseRest : observedRest.erase = rest := by
    simp using congrArg List.tail herase
  refine <by simp [heraseRest],
    inter (hardwarePrimitive D_0 j_0 realize) arg semanticEnv, _,
    ControlRel.term arg callEnv semanticEnv henv,
    PathStackRel.function fn f saved observedRest restK hfn hrest, ?_>
  rw [hresult]
  change
    TTContinuation.continuation
      ((TTContinuation.atCoordinate saved).comp
        (applyContinuation (Q := TTEExternalContinuationPower 2)
          (D_0 := D_0) (j_0 := j_0)
            (inter (hardwarePrimitive D_0 j_0 realize) arg)
              semanticEnv))
        restK f =
      inter (hardwarePrimitive D_0 j_0 realize) arg semanticEnv saved
      (TTContinuation.continuation
        ((TTContinuation.atCoordinate saved).comp
          (semanticUnfold (Q := TTEExternalContinuationPower 2)
            (D_0 := D_0) (j_0 := j_0) f))
            restK)
    simp only [ScottMap.comp_apply, TTContinuation.atCoordinate_apply,
      TTContinuation.continuation_apply]
    rw [applyContinuation_apply]
    rfl

/-- Closure beta pops the function frame and resumes the body at the
coordinate saved by that frame. -/
theorem path_channel_config_beta {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  {realize : C -> HSemanticValue D_0 j_0}
  {s : ChannelConfig C} {x : Name}
  {body : Term (QubitPrimitive C)} {closureEnv : RuntimeEnv C}
  {arg : RuntimeValue C} {rest : EvalStack C}
  {active saved : Nat} {observedRest : ObservedStack C}
  {finalK : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)}
  {result : TTResult 2}
  (hrel : PathChannelConfigRel D_0 j_0 realize
    {s with
      control := .value arg
      stack := .function (.closure x body closureEnv) :: rest}
    active ((.function (.closure x body closureEnv), saved) :: observedRest)
    finalK result) :
  PathChannelConfigRel D_0 j_0 realize
    {s with
      control := .term body
      env := RuntimeEnv.bind x arg closureEnv
      stack := rest}
    saved observedRest finalK result := by
  rcases hrel with <herase, current, currentK, hcontrol, hstack, hresult>
  cases hcontrol with
  | value _ d _ harg =>
    cases hstack with
    | function _ f _ _ restK hfn hrest =>
      cases hfn with
      | closure _ _ _ semanticEnv henv =>
        have heraseRest : observedRest.erase = rest := by
          simp using congrArg List.tail herase
        refine <heraseRest,
          inter (hardwarePrimitive D_0 j_0 realize) body

```

```

      (envUpdate (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0) x (semanticEnv, d)),
      restK, ControlRel.term body _ _
      (closure_beta_env D_0 j_0 henv harg), hrest, ?_>
    rw [hresult]
  simp only [semanticUnit, TTContinuation.taggedUnit,
    TTContinuation.continuation_apply, ScottMap.comp_apply,
    TTContinuation.atCoordinate_apply]
  exact congrArg (fun q : HSemanticComp D_0 j_0 =>
    q saved restK) (closure_application D_0 j_0
      x body closureEnv semanticEnv arg d henv harg)

/-- Recursive beta has the same saved-coordinate discipline as ordinary
beta, while extending the body environment with both recursive binders. -/
theorem path_channel_config_recBeta {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  {realize : C -> HSemanticValue D_0 j_0}
  {s : ChannelConfig C} {self x : Name}
  {body : Term (QubitPrimitive C)} {closureEnv : RuntimeEnv C}
  {arg : RuntimeValue C} {frest : EvalStack C}
  {active saved : Nat} {observedRest : ObservedStack C}
  {finalK : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)}
  {result : TTResult 2}
  (hrel : PathChannelConfigRel D_0 j_0 realize
    {s with
      control := .value arg
      stack :=
        .function (.recClosure self x body closureEnv) :: rest}
    active
    ((.function (.recClosure self x body closureEnv), saved) :: observedRest)
    finalK result) :
  PathChannelConfigRel D_0 j_0 realize
    {s with
      control := .term body
      env :=
        RuntimeEnv.bind x arg
        (RuntimeEnv.bind self
          (.recClosure self x body closureEnv) closureEnv)
      stack := rest}
    saved observedRest finalK result := by
  rcases hrel with <herase, current, currentK, hcontrol, hstack, hresult>
  cases hcontrol with
  | value _ d _ harg =>
    cases hstack with
    | function _ f _ _ restK hfn hrest =>
      cases hfn with
      | recClosure _ _ _ semanticEnv henv =>
        have heraseRest : observedRest.erase = rest := by
          simpa using congrArg List.tail herase
        refine <heraseRest,
          interp (hardwarePrimitive D_0 j_0 realize) body
            (envUpdate (Q := TTEExternalContinuationPower 2)
              (D_0 := D_0) (j_0 := j_0) x
              (envUpdate (Q := TTEExternalContinuationPower 2)
                (D_0 := D_0) (j_0 := j_0) self
                (semanticEnv,
                  recLambdaValue
                    (Q := TTEExternalContinuationPower 2)
                    (D_0 := D_0) (j_0 := j_0) self x
                    (interp (hardwarePrimitive D_0 j_0 realize) body)
                    semanticEnv),

```



```

        d)),
    restK, ControlRel.term body _ _
      (recClosure_unfold_env D_0 j_0 henv harg), hrest, ?_>
  rw [hresult]
  simp only [semanticUnit, TTContinuation.taggedUnit,
    TTContinuation.continuation_apply, ScottMap.comp_apply,
    TTContinuation.atCoordinate_apply]
  exact congrArg (fun q : HSemanticComp D_0 j_0 =>
    q saved restK) (recClosure_application D_0 j_0
      self x body closureEnv semanticEnv arg d henv harg)

/-- Recursive abstraction installs the related recursive closure without
changing the path-indexed result. -/
theorem path_channel_config_recursive {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEnternalContinuationPower 2)) D_0.carrier))
  {realize : C -> HSemanticValue D_0 j_0}
  {s : ChannelConfig C} {self arg : Name}
  {body : Term (QubitPrimitive C)}
  {active : Nat} {observedStack : ObservedStack C}
  {finalK : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)}
  {result : TTResult 2}
  (hrel : PathChannelConfigRel D_0 j_0 realize
    {s with control := .term (.recLam self arg body)}
    active observedStack finalK result) :
  PathChannelConfigRel D_0 j_0 realize
    {s with control := .value (.recClosure self arg body s.env)}
    active observedStack finalK result := by
  rcases hrel with <herase, current, currentK, hcontrol, hstack, hresult>
  cases hcontrol with
  | term _ _ semanticEnv henv =>
    refine <herase,
      semanticUnit (Q := TTEnternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0)
        (recLambdaValue (Q := TTEnternalContinuationPower 2)
          (D_0 := D_0) (j_0 := j_0) self arg
            (interp (hardwarePrimitive D_0 j_0 realize) body) semanticEnv),
      currentK,
      ControlRel.value _ _ s.env
        (recClosure_created D_0 j_0 realize self arg body
          s.env semanticEnv henv),
      hstack, ?_>
    rw [hresult, interp_recLam_apply]

/-- Ordinary abstraction installs the related closure at the same
path-indexed result. -/
theorem path_channel_config_lambda {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEnternalContinuationPower 2)) D_0.carrier))
  {realize : C -> HSemanticValue D_0 j_0}
  {s : ChannelConfig C} {x : Name} {body : Term (QubitPrimitive C)}
  {active : Nat} {observedStack : ObservedStack C}
  {finalK : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)}
  {result : TTResult 2}
  (hrel : PathChannelConfigRel D_0 j_0 realize
    {s with control := .term (.lam x body)}
    active observedStack finalK result) :
  PathChannelConfigRel D_0 j_0 realize
    {s with control := .value (.closure x body s.env)}
    active observedStack finalK result := by
  rcases hrel with <herase, current, currentK, hcontrol, hstack, hresult>

```

```

cases hcontrol with
| term _ _ semanticEnv henv =>
  refine <herase,
    semanticUnit (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0)
      (lambdaValue (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0) x
        (interp (hardwarePrimitive D_0 j_0 realize) body) semanticEnv),
    currentK,
    ControlRel.value _ _ s.env
      (closure_created D_0 j_0 realize x body s.env semanticEnv henv),
    hstack, ?_>
  rw [hresult, interp_lam_apply]

/-- A returned value is observed by applying the current continuation, so
the path-indexed relation does not depend on the active coordinate. -/
theorem path_channel_config_value_reindex {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  {realize : C -> HSemanticValue D_0 j_0}
  {s : ChannelConfig C} {value : RuntimeValue C}
  (hc : s.control = .value value)
  {active active' : Nat} {observedStack : ObservedStack C}
  {finalK : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)}
  {result : TTResult 2}
  (hrel : PathChannelConfigRel D_0 j_0 realize
    s active observedStack finalK result) :
  PathChannelConfigRel D_0 j_0 realize
    s active' observedStack finalK result := by
rcases hrel with <herase, current, currentK, hcontrol, hstack, hresult>
rw [hc] at hcontrol
cases hcontrol with
| value _ d _ hvalue =>
  refine <herase, semanticUnit (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0) d, currentK,
    hc.symm |> ControlRel.value value d s.env hvalue, hstack, ?_>
  rw [hresult]
  rfl

/-- Variable lookup installs the related runtime value at the same
path-indexed result. -/
theorem path_channel_config_variable {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  {realize : C -> HSemanticValue D_0 j_0}
  {s : ChannelConfig C} {x : Name} {v : RuntimeValue C}
  (hc : s.control = .term (.var x))
  (hlookup : RuntimeEnv.lookup x s.env = some v)
  {active : Nat} {observedStack : ObservedStack C}
  {finalK : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)}
  {result : TTResult 2}
  (hrel : PathChannelConfigRel D_0 j_0 realize
    s active observedStack finalK result) :
  PathChannelConfigRel D_0 j_0 realize
    {s with control := .value v}
    active observedStack finalK result := by
rcases hrel with <herase, current, currentK, hcontrol, hstack, hresult>
rw [hc] at hcontrol
cases hcontrol with
| term _ _ semanticEnv henv =>
  refine <herase,

```

```

    semanticUnit (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0) (semanticEnv x),
    currentK,
    ControlRel.value v (semanticEnv x) s.env
      (env_lookup D_0 j_0 henv hlookup),
    hstack, ?_>
  rw [hresult, interp_var_apply]

theorem channel_config_lambda {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  {realize : C -> HSemanticValue D_0 j_0}
  {s : ChannelConfig C} {x : Name} {body : Term (QubitPrimitive C)}
  {answer : HSemanticComp D_0 j_0}
  (hrel : ChannelConfigRel D_0 j_0 realize
    {s with control := .term (.lam x body)} answer) :
  ChannelConfigRel D_0 j_0 realize
    {s with control := .value (.closure x body s.env)} answer := by
  rcases hrel with <current, k, hcontrol, hstack, rfl>
  cases hcontrol with
  | term _ _ semanticEnv henv =>
    refine <semanticUnit (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0)
      (lambdaValue (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0) x
        (interp (hardwarePrimitive D_0 j_0 realize) body) semanticEnv),
      k, ControlRel.value _ _ s.env
      (closure_created D_0 j_0 realize x body s.env semanticEnv henv),
      hstack, ?_>
    rw [interp_lam_apply]

theorem channel_config_recursive {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  {realize : C -> HSemanticValue D_0 j_0}
  {s : ChannelConfig C} {self arg : Name}
  {body : Term (QubitPrimitive C)}
  {answer : HSemanticComp D_0 j_0}
  (hrel : ChannelConfigRel D_0 j_0 realize
    {s with control := .term (.recLam self arg body)} answer) :
  ChannelConfigRel D_0 j_0 realize
    {s with control := .value (.recClosure self arg body s.env)}
    answer := by
  rcases hrel with <current, k, hcontrol, hstack, rfl>
  cases hcontrol with
  | term _ _ semanticEnv henv =>
    refine <semanticUnit (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0)
      (recLambdaValue (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0) self arg
        (interp (hardwarePrimitive D_0 j_0 realize) body) semanticEnv),
      k, ControlRel.value _ _ s.env
      (recClosure_created D_0 j_0 realize self arg body
        s.env semanticEnv henv),
      hstack, ?_>
    rw [interp_recLam_apply]

theorem channel_config_variable {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))

```

```

{realize : C -> HSemanticValue D_0 j_0}
{s : ChannelConfig C} {x : Name} {v : RuntimeValue C}
(hlookup : RuntimeEnv.lookup x s.env = some v)
{answer : HSemanticComp D_0 j_0}
(hrel : ChannelConfigRel D_0 j_0 realize
  {s with control := .term (.var x)} answer) :
ChannelConfigRel D_0 j_0 realize
  {s with control := .value v} answer := by
rcases hrel with <current, k, hcontrol, hstack, rfl>
cases hcontrol with
| term _ _ semanticEnv henv =>
  refine <semanticUnit (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0) (semanticEnv x), k,
    ControlRel.value v (semanticEnv x) s.env
    (env_lookup D_0 j_0 henv hlookup), hstack, ?_>
  rw [interp_var_apply]

theorem channel_config_return {C : Type}
(D_0 : QDomain.{0})
(j_0 : IsContinuousLatticeProjection D_0.carrier
  (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
{realize : C -> HSemanticValue D_0 j_0}

```

Lean 4 source (lines 6401–6800)

```

{s : ChannelConfig C} {value : C}
{answer : HSemanticComp D_0 j_0}
(hrel : ChannelConfigRel D_0 j_0 realize
  {s with control := .term (.prim (.ret value))} answer) :
ChannelConfigRel D_0 j_0 realize
  {s with control := .value (.payload value)} answer := by
rcases hrel with <current, k, hcontrol, hstack, rfl>
cases hcontrol with
| term _ _ semanticEnv henv =>
  refine <semanticUnit (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0) (realize value), k,
    ControlRel.value _ _ s.env
    (payload_related D_0 j_0 realize value), hstack, ?_>
  rw [interp_prim_apply, hardwarePrimitive_ret]
  rfl

theorem channel_config_pauliX {C : Type}
(D_0 : QDomain.{0})
(j_0 : IsContinuousLatticeProjection D_0.carrier
  (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
{realize : C -> HSemanticValue D_0 j_0}
{s : ChannelConfig C} {value : C}
{answer : HSemanticComp D_0 j_0}
(hrel : ChannelConfigRel D_0 j_0 realize
  {s with control := .term (.prim (.pauliX value))} answer) :
exists k : HSemanticComp D_0 j_0 -> HSemanticComp D_0 j_0,
  ChannelConfigRel D_0 j_0 realize
    {s with
      control := .value (.payload value)
      quantum := applyOperation Qubit.pauliXOp s.quantum}
    (k (semanticUnit (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0) (realize value))) /\
  answer =
    k (taggedEmbed (FiniteInstrumentComp.ofOperation Qubit.pauliXOp
      (realize value))) := by
rcases hrel with <current, k, hcontrol, hstack, rfl>
cases hcontrol with
| term _ _ semanticEnv henv =>
  refine <k, ?_, ?_>

```

```

* exact <semanticUnit (Q := TTEExternalContinuationPower 2)
  (D_0 := D_0) (j_0 := j_0) (realize value), k,
  ControlRel.value _ _ s.env
  (payload_related D_0 j_0 realize value), hstack, rfl>
* rw [interp_prim_apply, hardwarePrimitive_pauliX]

theorem channel_config_measureZ {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  {realize : C → HSemanticValue D_0 j_0}
  {s : ChannelConfig C} {zeroValue oneValue : C}
  {answer : HSemanticComp D_0 j_0}
  (hrel : ChannelConfigRel D_0 j_0 realize
    {s with control := .term (.prim (.measureZ zeroValue oneValue)))}
    answer) :
  exists k : HSemanticComp D_0 j_0 → HSemanticComp D_0 j_0,
    ChannelConfigRel D_0 j_0 realize
      {s with
        control := .value (.payload zeroValue)
        quantum := applyOperation (measurementOperation false) s.quantum}
      (k (semanticUnit (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0) (realize zeroValue))) /\
    ChannelConfigRel D_0 j_0 realize
      {s with
        control := .value (.payload oneValue)
        quantum := applyOperation (measurementOperation true) s.quantum}
      (k (semanticUnit (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0) (realize oneValue))) /\
    answer =
    k (taggedEmbed (Qubit.measureZComp.map
      (fun b => if b then realize oneValue else realize zeroValue))) := by
  rcases hrel with <current, k, hcontrol, hstack, rfl>
  cases hcontrol with
  | term _ _ semanticEnv henv =>
    refine <k, ?_, ?_, ?_>
    * exact <semanticUnit (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0) (realize zeroValue), k,
      ControlRel.value _ _ s.env
      (payload_related D_0 j_0 realize zeroValue), hstack, rfl>
    * exact <semanticUnit (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0) (realize oneValue), k,
      ControlRel.value _ _ s.env
      (payload_related D_0 j_0 realize oneValue), hstack, rfl>
    * rw [interp_prim_apply, hardwarePrimitive_measureZ]

/-- Binding a residual continuation around a Pauli-X embedding evaluates
the operation at the returned payload, then continues. -/
theorem semanticBind_ofOperation_eval
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (h : ScottMap (HSemanticValue D_0 j_0) (HSemanticComp D_0 j_0))
  (? : QuantumOperation 2 2)
  (d : HSemanticValue D_0 j_0)
  (coord : Nat)
  (k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)) :
  semanticBind (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0) h
    (taggedEmbed (FiniteInstrumentComp.ofOperation ? d))
    coord k =
  embed (FiniteInstrumentComp.ofOperation ? d)
    (ScottMap.const

```

```

      (semanticBind (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0) h
        (semanticUnit (Q := TTEExternalContinuationPower 2)
          (D_0 := D_0) (j_0 := j_0) d)
        coord k)) := by
change
  (TTContinuation.atCoordinate coord
    (TTContinuation.taggedBindScott (n := 2) h
      (taggedEmbed (FiniteInstrumentComp.ofOperation ? d)))) k =
  embed (FiniteInstrumentComp.ofOperation ? d)
    (ScottMap.const
      (semanticBind (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0) h
        (semanticUnit (Q := TTEExternalContinuationPower 2)
          (D_0 := D_0) (j_0 := j_0) d)
        coord k))
rw [TTContinuation.taggedBind_atCoordinate, TTContinuation.bind_apply]
change
  embed (FiniteInstrumentComp.ofOperation ? d)
    (TTContinuation.continuation
      ((TTContinuation.atCoordinate coord).comp h) k) =
  embed (FiniteInstrumentComp.ofOperation ? d)
    (ScottMap.const
      (semanticBind (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0) h
        (semanticUnit (Q := TTEExternalContinuationPower 2)
          (D_0 := D_0) (j_0 := j_0) d)
        coord k))
rw [embed_ofOperation_eval]
congr 1

/-- Two residual binds still evaluate an operation embedding as a
constant-state instrument against the bound unit. -/
theorem semanticBind_bind_ofOperation_eval
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (h g : ScottMap (HSemanticValue D_0 j_0) (HSemanticComp D_0 j_0))
  (? : QuantumOperation 2 2)
  (d : HSemanticValue D_0 j_0)
  (coord : Nat)
  (k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)) :
  semanticBind (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0) h
    (semanticBind (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0) g
      (taggedEmbed (FiniteInstrumentComp.ofOperation ? d)))
    coord k =
  embed (FiniteInstrumentComp.ofOperation ? d)
    (ScottMap.const
      (semanticBind (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0) h
        (semanticBind (Q := TTEExternalContinuationPower 2)
          (D_0 := D_0) (j_0 := j_0) g
          (semanticUnit (Q := TTEExternalContinuationPower 2)
            (D_0 := D_0) (j_0 := j_0) d))
        coord k)) := by
have hassoc :
  semanticBind (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0) h
    (semanticBind (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0) g
      (taggedEmbed (FiniteInstrumentComp.ofOperation ? d))) =

```

```

      TTContinuation.taggedBindScott
        ((TTContinuation.taggedBindScott (n := 2) h).comp g)
        (taggedEmbed (FiniteInstrumentComp.ofOperation ? d)) :=
    congrArg
      (fun f : ScottMap (HSemanticComp D_0 j_0) (HSemanticComp D_0 j_0) =>
        f (taggedEmbed (FiniteInstrumentComp.ofOperation ? d)))
      (TTContinuation.taggedBind_assoc (n := 2) g h)
  have hassocUnit :
    semanticBind (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0) h
      (semanticBind (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0) g
        (semanticUnit (Q := TTEExternalContinuationPower 2)
          (D_0 := D_0) (j_0 := j_0) d)) =
    TTContinuation.taggedBindScott
      ((TTContinuation.taggedBindScott (n := 2) h).comp g)
      (semanticUnit (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0) d) :=
  congrArg
    (fun f : ScottMap (HSemanticComp D_0 j_0) (HSemanticComp D_0 j_0) =>
      f (semanticUnit (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0) d))
    (TTContinuation.taggedBind_assoc (n := 2) g h)
  rw [hassoc, hassocUnit]
  exact semanticBind_ofOperation_eval D_0 j_0
    ((TTContinuation.taggedBindScott (n := 2) h).comp g) ? d coord k

/-- Any residual `StackRel` continuation still evaluates an extra bind
of an operation embedding as a constant-state instrument. -/
theorem stackRel_bind_ofOperation_eval {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  {realize : C -> HSemanticValue D_0 j_0}
  {stack : EvalStack C}
  {k : HSemanticComp D_0 j_0 -> HSemanticComp D_0 j_0}
  (hstack : StackRel D_0 j_0 realize stack k)
  (h : ScottMap (HSemanticValue D_0 j_0) (HSemanticComp D_0 j_0))
  (? : QuantumOperation 2 2)
  (d : HSemanticValue D_0 j_0)
  (coord : Nat)
  (k? : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)) :
  k (semanticBind (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0) h
    (taggedEmbed (FiniteInstrumentComp.ofOperation ? d)))
  coord k? =
  embed (FiniteInstrumentComp.ofOperation ? d)
    (ScottMap.const
      (k (semanticBind (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0) h
        (semanticUnit (Q := TTEExternalContinuationPower 2)
          (D_0 := D_0) (j_0 := j_0) d))
        coord k?)) := by
  induction hstack generalizing h with
  | nil =>
    exact semanticBind_ofOperation_eval D_0 j_0 h ? d coord k?
  | argument arg runtimeEnv semanticEnv rest krest henv hrest ih =>
    have hassoc :
      semanticBind (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0)
        (applyContinuation (Q := TTEExternalContinuationPower 2)
          (D_0 := D_0) (j_0 := j_0)
          (interp (hardwarePrimitive D_0 j_0 realize) arg)

```

```

      semanticEnv)
    (semanticBind (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0) h
      (taggedEmbed (FiniteInstrumentComp.ofOperation ? d))) =
TTContinuation.taggedBindScott
  ((TTContinuation.taggedBindScott (n := 2)
    (applyContinuation (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0)
      (interp (hardwarePrimitive D_0 j_0 realize) arg)
      semanticEnv)).comp h)
    (taggedEmbed (FiniteInstrumentComp.ofOperation ? d)) :=
congrArg
  (fun f : ScottMap (HSemanticComp D_0 j_0)
    (HSemanticComp D_0 j_0) =>
    f (taggedEmbed (FiniteInstrumentComp.ofOperation ? d)))
  (TTContinuation.taggedBind_assoc (n := 2) h
    (applyContinuation (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0)
      (interp (hardwarePrimitive D_0 j_0 realize) arg)
      semanticEnv))
have hassocUnit :
  semanticBind (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0)
    (applyContinuation (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0)
      (interp (hardwarePrimitive D_0 j_0 realize) arg)
      semanticEnv)
    (semanticBind (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0) h
      (semanticUnit (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0) d)) =
TTContinuation.taggedBindScott
  ((TTContinuation.taggedBindScott (n := 2)
    (applyContinuation (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0)
      (interp (hardwarePrimitive D_0 j_0 realize) arg)
      semanticEnv)).comp h)
    (semanticUnit (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0) d) :=
congrArg
  (fun f : ScottMap (HSemanticComp D_0 j_0)
    (HSemanticComp D_0 j_0) =>
    f (semanticUnit (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0) d))
  (TTContinuation.taggedBind_assoc (n := 2) h
    (applyContinuation (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0)
      (interp (hardwarePrimitive D_0 j_0 realize) arg)
      semanticEnv))
change
  krest
    (semanticBind (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0)
      (applyContinuation (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0)
        (interp (hardwarePrimitive D_0 j_0 realize) arg)
        semanticEnv)
      (semanticBind (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0) h
        (taggedEmbed (FiniteInstrumentComp.ofOperation ? d))))
  coord k? =
  embed (FiniteInstrumentComp.ofOperation ? d)
  (ScottMap.const

```



```

      (krest
        (semanticBind (Q := TTEExternalContinuationPower 2)
          (D_0 := D_0) (j_0 := j_0)
          (applyContinuation
            (Q := TTEExternalContinuationPower 2)
            (D_0 := D_0) (j_0 := j_0)
            (interp (hardwarePrimitive D_0 j_0 realize) arg)
            semanticEnv)
          (semanticBind (Q := TTEExternalContinuationPower 2)
            (D_0 := D_0) (j_0 := j_0) h
            (semanticUnit
              (Q := TTEExternalContinuationPower 2)
              (D_0 := D_0) (j_0 := j_0) d)))
        coord k?))
    rw [hassoc, hassocUnit]
  exact ih
  ((TTContinuation.taggedBindScott (n := 2)
    (applyContinuation (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0)
      (interp (hardwarePrimitive D_0 j_0 realize) arg)
      semanticEnv)).comp h)
| function fn f rest krest hfn hrest ih =>
  have hassoc :
    semanticBind (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0)
      (semanticUnfold (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0) f)
      (semanticBind (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0) h
        (taggedEmbed (FiniteInstrumentComp.ofOperation ? d))) =
    TTContinuation.taggedBindScott
      ((TTContinuation.taggedBindScott (n := 2)
        (semanticUnfold (Q := TTEExternalContinuationPower 2)
          (D_0 := D_0) (j_0 := j_0) f)).comp h)
        (taggedEmbed (FiniteInstrumentComp.ofOperation ? d))) :=
  congrArg
    (fun f : ScottMap (HSemanticComp D_0 j_0)
      (HSemanticComp D_0 j_0) =>
        f (taggedEmbed (FiniteInstrumentComp.ofOperation ? d)))
    (TTContinuation.taggedBind_assoc (n := 2) h
      (semanticUnfold (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0) f))
  have hassocUnit :
    semanticBind (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0)
      (semanticUnfold (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0) f)
      (semanticBind (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0) h
        (semanticUnit (Q := TTEExternalContinuationPower 2)
          (D_0 := D_0) (j_0 := j_0) d))) =
    TTContinuation.taggedBindScott
      ((TTContinuation.taggedBindScott (n := 2)
        (semanticUnfold (Q := TTEExternalContinuationPower 2)
          (D_0 := D_0) (j_0 := j_0) f)).comp h)
        (semanticUnit (Q := TTEExternalContinuationPower 2)
          (D_0 := D_0) (j_0 := j_0) d))) :=
  congrArg
    (fun f : ScottMap (HSemanticComp D_0 j_0)
      (HSemanticComp D_0 j_0) =>
        f (semanticUnit (Q := TTEExternalContinuationPower 2)
          (D_0 := D_0) (j_0 := j_0) d)))
    (TTContinuation.taggedBind_assoc (n := 2) h

```

```

      (semanticUnfold (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0) f))
change
  krest
    (semanticBind (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0)
      (semanticUnfold (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0) f)
      (semanticBind (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0) h
        (taggedEmbed (FiniteInstrumentComp.ofOperation ? d))))
  coord k? =
  embed (FiniteInstrumentComp.ofOperation ? d)
  (ScottMap.const
    (krest
      (semanticBind (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0)
        (semanticUnfold
          (Q := TTEExternalContinuationPower 2)
          (D_0 := D_0) (j_0 := j_0) f)
        (semanticBind (Q := TTEExternalContinuationPower 2)
          (D_0 := D_0) (j_0 := j_0) h
          (semanticUnit
            (Q := TTEExternalContinuationPower 2)
            (D_0 := D_0) (j_0 := j_0) d))))
      coord k?))
  rw [hassoc, hassocUnit]
exact ih
  ((TTContinuation.taggedBindScott (n := 2)
    (semanticUnfold (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0) f)).comp h)

/-- A nonempty residual stack evaluates an operation embedding as a
constant-state instrument against the bound unit. -/
theorem stackRel_ofOperation_eval {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  {realize : C -> HSemanticValue D_0 j_0}
  {stack : EvalStack C}
  {k : HSemanticComp D_0 j_0 -> HSemanticComp D_0 j_0}
  (hstack : StackRel D_0 j_0 realize stack k)
  (hne : stack != [])
  (? : QuantumOperation 2 2)
  (d : HSemanticValue D_0 j_0)
  (coord : Nat)

```

Lean 4 source (lines 6801–7200)

```

(k? : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)) :
k (taggedEmbed (FiniteInstrumentComp.ofOperation ? d)) coord k? =
  embed (FiniteInstrumentComp.ofOperation ? d)
  (ScottMap.const
    (k (semanticUnit (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0) d)
      coord k?)) := by
cases hstack with
| nil => exact False.elim (hne rfl)
| argument arg runtimeEnv semanticEnv rest krest henv hrest =>
  exact stackRel_bind_ofOperation_eval D_0 j_0 hrest
    (applyContinuation (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0)
      (interp (hardwarePrimitive D_0 j_0 realize) arg) semanticEnv)
    ? d coord k?

```

```

| function fn f rest krest hfn hrest =>
  exact stackRel_bind_ofOperation_eval D_0 j_0 hrest
    (semanticUnfold (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0) f)
    ? d coord k?

theorem channel_config_application {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  {realize : C -> HSemanticValue D_0 j_0}
  {s : ChannelConfig C} {fn arg : Term (QubitPrimitive C)}
  {answer : HSemanticComp D_0 j_0}
  (hrel : ChannelConfigRel D_0 j_0 realize
    {s with control := .term (.app fn arg)} answer) :
  ChannelConfigRel D_0 j_0 realize
    {s with control := .term fn,
      stack := .argument arg s.env :: s.stack} answer := by
rcases hrel with <current, k, hcontrol, hstack, rfl>
cases hcontrol with
| term _ _ semanticEnv henv =>
  refine <interp (hardwarePrimitive D_0 j_0 realize) fn semanticEnv,
    (fun mf => k
      (semanticBind (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0)
        (applyContinuation (Q := TTEExternalContinuationPower 2)
          (D_0 := D_0) (j_0 := j_0)
          (interp (hardwarePrimitive D_0 j_0 realize) arg) semanticEnv)
        mf)), ?_, ?_, ?_>
  * exact ControlRel.term fn s.env semanticEnv henv
  * exact stack_push_argument D_0 j_0 henv hstack
  * exact (application_under_stack D_0 j_0 realize
    fn arg semanticEnv k).symm

theorem channel_config_evaluateArgument {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  {realize : C -> HSemanticValue D_0 j_0}
  {s : ChannelConfig C} {fn : RuntimeValue C}
  {arg : Term (QubitPrimitive C)} {callEnv : RuntimeEnv C}
  {rest : EvalStack C} {answer : HSemanticComp D_0 j_0}
  (hrel : ChannelConfigRel D_0 j_0 realize
    {s with control := .value fn,
      stack := .argument arg callEnv :: rest} answer) :
  ChannelConfigRel D_0 j_0 realize
    {s with control := .term arg,
      env := callEnv,
      stack := .function fn :: rest} answer := by
rcases hrel with <current, outer, hcontrol, hstack, rfl>
cases hcontrol with
| value _ f _ hfn =>
  cases hstack with
  | argument _ _ semanticEnv _ k henv hrest =>
    refine <interp (hardwarePrimitive D_0 j_0 realize) arg semanticEnv,
      (fun ma => k
        (semanticBind (Q := TTEExternalContinuationPower 2)
          (D_0 := D_0) (j_0 := j_0)
          (semanticUnfold (Q := TTEExternalContinuationPower 2)
            (D_0 := D_0) (j_0 := j_0) f)
          ma)), ?_, ?_, ?_>
    * exact ControlRel.term arg callEnv semanticEnv henv
    * exact stack_argument_to_function D_0 j_0 hfn hrest

```

```

    * exact (evaluateArgument_under_stack D_0 j_0
      arg semanticEnv f k).symm

theorem channel_config_beta {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  {realize : C -> HSemanticValue D_0 j_0}
  {s : ChannelConfig C} {x : Name}
  {body : Term (QubitPrimitive C)} {closureEnv : RuntimeEnv C}
  {arg : RuntimeValue C} {rest : EvalStack C}
  {answer : HSemanticComp D_0 j_0}
  (hrel : ChannelConfigRel D_0 j_0 realize
    {s with control := .value arg,
      stack := .function (.closure x body closureEnv) :: rest}
    answer) :
  ChannelConfigRel D_0 j_0 realize
    {s with control := .term body,
      env := RuntimeEnv.bind x arg closureEnv,
      stack := rest} answer := by
  rcases hrel with <current, outer, hcontrol, hstack, rfl>
  cases hcontrol with
  | value _ d _ harg =>
    cases hstack with
    | function _ f _ k hfn hrest =>
      cases hfn with
      | closure _ _ _ semanticEnv henv =>
        refine <interp (hardwarePrimitive D_0 j_0 realize) body
          (envUpdate (Q := TTEExternalContinuationPower 2)
            (D_0 := D_0) (j_0 := j_0) x (semanticEnv, d)), k, ?_, hrest, ?_>
        * exact ControlRel.term body _ _
          (closure_beta_env D_0 j_0 henv harg)
        * exact congrArg k (closure_application D_0 j_0
          x body closureEnv semanticEnv arg d henv harg)

theorem channel_config_recBeta {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  {realize : C -> HSemanticValue D_0 j_0}
  {s : ChannelConfig C} {self x : Name}
  {body : Term (QubitPrimitive C)} {closureEnv : RuntimeEnv C}
  {arg : RuntimeValue C} {rest : EvalStack C}
  {answer : HSemanticComp D_0 j_0}
  (hrel : ChannelConfigRel D_0 j_0 realize
    {s with control := .value arg,
      stack :=
        .function (.recClosure self x body closureEnv) :: rest}
    answer) :
  ChannelConfigRel D_0 j_0 realize
    {s with control := .term body,
      env :=
        RuntimeEnv.bind x arg
          (RuntimeEnv.bind self
            (.recClosure self x body closureEnv) closureEnv),
      stack := rest} answer := by
  rcases hrel with <current, outer, hcontrol, hstack, rfl>
  cases hcontrol with
  | value _ d _ harg =>
    cases hstack with
    | function _ f _ k hfn hrest =>
      cases hfn with
      | recClosure _ _ _ _ semanticEnv henv =>

```

```

    refine <interp (hardwarePrimitive D_0 j_0 realize) body
      (envUpdate (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0) x
        (envUpdate (Q := TTEExternalContinuationPower 2)
          (D_0 := D_0) (j_0 := j_0) self
          (semanticEnv,
            recLambdaValue
              (Q := TTEExternalContinuationPower 2)
              (D_0 := D_0) (j_0 := j_0) self x
              (interp (hardwarePrimitive D_0 j_0 realize) body)
            semanticEnv),
            d)), k, ?_, hrest, ?_>
  * exact ControlRel.term body _ _
    (recClosure_unfold_env D_0 j_0 henv harg)
  * exact congrArg k (recClosure_application D_0 j_0
    self x body closureEnv semanticEnv arg d henv harg)

theorem channel_config_internalLeft {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  {realize : C -> HSemanticValue D_0 j_0}
  {s : ChannelConfig C} {left right : Term (QubitPrimitive C)}
  {answer : HSemanticComp D_0 j_0}
  (hrel : ChannelConfigRel D_0 j_0 realize
    {s with control := .term (.intern left right)} answer) :
  exists targetAnswer,
    ChannelConfigRel D_0 j_0 realize
      {s with control := .term left} targetAnswer /\
      targetAnswer <= answer := by
rcases hrel with <current, k, hcontrol, hstack, rfl>
cases hcontrol with
| term _ _ semanticEnv henv =>
  refine <k (interp (hardwarePrimitive D_0 j_0 realize) left semanticEnv),
    ?_, ?_>
  * exact <_, k, ControlRel.term left s.env semanticEnv henv,
    hstack, rfl>
  * exact stack_monotone D_0 j_0 hstack
    (internal_left_le D_0 j_0 realize left right semanticEnv)

theorem channel_config_internalRight {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  {realize : C -> HSemanticValue D_0 j_0}
  {s : ChannelConfig C} {left right : Term (QubitPrimitive C)}
  {answer : HSemanticComp D_0 j_0}
  (hrel : ChannelConfigRel D_0 j_0 realize
    {s with control := .term (.intern left right)} answer) :
  exists targetAnswer,
    ChannelConfigRel D_0 j_0 realize
      {s with control := .term right} targetAnswer /\
      targetAnswer <= answer := by
rcases hrel with <current, k, hcontrol, hstack, rfl>
cases hcontrol with
| term _ _ semanticEnv henv =>
  refine <k (interp (hardwarePrimitive D_0 j_0 realize) right semanticEnv),
    ?_, ?_>
  * exact <_, k, ControlRel.term right s.env semanticEnv henv,
    hstack, rfl>
  * exact stack_monotone D_0 j_0 hstack
    (internal_right_le D_0 j_0 realize left right semanticEnv)

```

```

theorem channel_config_probabilityLeft {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  {realize : C -> HSemanticValue D_0 j_0}
  {s : ChannelConfig C} {p : Prob}
  {left right : Term (QubitPrimitive C)}
  (hp_0 : 0 <= p) (hp_1 : p <= 1)
  {answer : HSemanticComp D_0 j_0}
  (hrel : ChannelConfigRel D_0 j_0 realize
    {s with control := .term (.prob p left right)} answer) :
  exists targetAnswer,
    ChannelConfigRel D_0 j_0 realize
      {s with control := .term left} targetAnswer /\
      HasWeightedBranchSemantics.weightedBranch answer p targetAnswer := by
rcases hrel with <current, k, hcontrol, hstack, rfl>
cases hcontrol with
| term _ _ semanticEnv henv =>
  refine <k (interp (hardwarePrimitive D_0 j_0 realize) left semanticEnv),
    ?_, ?_>
  * exact <_, k, ControlRel.term left s.env semanticEnv henv,
    hstack, rfl>
  * exact stack_weightedBranch D_0 j_0 hstack
    (probability_left_weighted D_0 j_0 realize p left right
      hp_0 hp_1 semanticEnv)

theorem channel_config_probabilityRight {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  {realize : C -> HSemanticValue D_0 j_0}
  {s : ChannelConfig C} {p : Prob}
  {left right : Term (QubitPrimitive C)}
  (hp_0 : 0 <= p) (hp_1 : p <= 1)
  {answer : HSemanticComp D_0 j_0}
  (hrel : ChannelConfigRel D_0 j_0 realize
    {s with control := .term (.prob p left right)} answer) :
  exists targetAnswer,
    ChannelConfigRel D_0 j_0 realize
      {s with control := .term right} targetAnswer /\
      HasWeightedBranchSemantics.weightedBranch answer (1 - p)
      targetAnswer := by
rcases hrel with <current, k, hcontrol, hstack, rfl>
cases hcontrol with
| term _ _ semanticEnv henv =>
  refine <k (interp (hardwarePrimitive D_0 j_0 realize) right semanticEnv),
    ?_, ?_>
  * exact <_, k, ControlRel.term right s.env semanticEnv henv,
    hstack, rfl>
  * exact stack_weightedBranch D_0 j_0 hstack
    (probability_right_weighted D_0 j_0 realize p left right
      hp_0 hp_1 semanticEnv)

theorem channel_config_externalSelect {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  {realize : C -> HSemanticValue D_0 j_0}
  {s : ChannelConfig C} {selected : Bool}
  {left right : Term (QubitPrimitive C)}
  (hcommute :
    forall current k,
      StackRel D_0 j_0 realize s.stack k ->

```

```

      HasExternalSelection.select selected (k current) =
        k (HasExternalSelection.select selected current))
{answer : HSemanticComp D_0 j_0}
(hrel : ChannelConfigRel D_0 j_0 realize
  {s with control := .term (.extern left right)} answer) :
ChannelConfigRel D_0 j_0 realize
  {s with control := .term (if selected then right else left)}
  (HasExternalSelection.select selected answer) := by
rcases hrel with <current, k, hcontrol, hstack, rfl>
cases hcontrol with
| term _ _ semanticEnv henv =>
  refine <interp (hardwarePrimitive D_0 j_0 realize)
    (if selected then right else left) semanticEnv, k, ?_, hstack, ?_>
  * exact ControlRel.term _ s.env semanticEnv henv
  * rw [hcommute _ k hstack,
    external_select D_0 j_0 realize selected left right semanticEnv]

theorem channel_config_externalSelect_nil {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  {realize : C -> HSemanticValue D_0 j_0}
  {s : ChannelConfig C} (hstack : s.stack = [])
  {selected : Bool} {left right : Term (QubitPrimitive C)}
  {answer : HSemanticComp D_0 j_0}
  (hrel : ChannelConfigRel D_0 j_0 realize
    {s with control := .term (.extern left right)} answer) :
ChannelConfigRel D_0 j_0 realize
  {s with control := .term (if selected then right else left)}
  (HasExternalSelection.select selected answer) := by
apply channel_config_externalSelect D_0 j_0 (s := s)
intro current k hk
rw [hstack] at hk
cases hk
rfl
exact hrel

/-- Selector paths commute with Kleisli extension by acting on the residual
heap coordinate. The `evalBranch` combinator is private, so the public
statement records the encoded residual coordinate. -/
theorem selectPath_taggedBind
  {D E : Type} [CompleteLattice D] [CompleteLattice E]
  (h : ScottMap D (TTEExternalContinuationPower 2 E))
  (q : TTEExternalContinuationPower 2 D)
  (selectors : List Bool) (i : Nat)
  (k : ScottMap E (TTResult 2)) :
HardwareAdequacy.selectPath selectors
  (TTContinuation.taggedBindScott (n := 2) h q) i k =
  TTContinuation.taggedBindScott (n := 2) h q
  (HardwareAdequacy.encodePath selectors i) k := by
rw [HardwareAdequacy.selectPath_apply_encode]

theorem selectPath_semanticBind
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (h : ScottMap (HSemanticValue D_0 j_0) (HSemanticComp D_0 j_0))
  (q : HSemanticComp D_0 j_0)
  (selectors : List Bool) (i : Nat)
  (k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)) :
HardwareAdequacy.selectPath selectors
  (semanticBind (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0) h q) i k =

```

```

    semanticBind (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0) h q
      (HardwareAdequacy.encodePath selectors i) k :=
selectPath_taggedBind h q selectors i k

/-- Apply-continuation and unfold are residual Scott maps, so selector paths
commute with them by the same residual-coordinate encoding. -/
theorem selectPath_applyContinuation
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (ma : ScottMap (Env (HSemanticValue D_0 j_0)) (HSemanticComp D_0 j_0))
  (? : Env (HSemanticValue D_0 j_0))
  (f : HSemanticValue D_0 j_0)
  (selectors : List Bool) (i : Nat)
  (k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)) :
HardwareAdequacy.selectPath selectors
  (applyContinuation (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0) ma ? f) i k =
  applyContinuation (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0) ma ? f
    (HardwareAdequacy.encodePath selectors i) k := by
rw [HardwareAdequacy.selectPath_apply_encode]

theorem selectPath_semanticUnfold
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (f : HSemanticValue D_0 j_0)
  (d : HSemanticValue D_0 j_0)
  (selectors : List Bool) (i : Nat)
  (k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)) :
HardwareAdequacy.selectPath selectors
  (semanticUnfold (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0) f d) i k =
  semanticUnfold (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0) f d
    (HardwareAdequacy.encodePath selectors i) k := by
rw [HardwareAdequacy.selectPath_apply_encode]

/-- A unique-successor identity step unwraps every tree at the source to
the unique child configuration. -/
theorem restrictedResult_of_unique_identity {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s t : ChannelConfig C}
  (hstep : ChannelInternalStep s t)
  (hop : channelInternalOperation s = QuantumOperation.identity 2)
  (hunq : forall {t'}, ChannelInternalStep s t' -> t' = t)
  (tree : ChannelTree C s)
  (R : ChannelTreeRealization D_0 j_0 realize tree)
  (selectors : List Bool) (i : Nat)
  (k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)) :
restrictedResult D_0 j_0 realize tree R selectors i k <=
  sSup (channelTreeResults D_0 j_0 realize t selectors i k) := by
cases tree with
| terminal hterm =>
  exact False.elim
  (ChannelInternalStep.not_value_nil hstep hterm.control_eq
    hterm.stack_eq)
| @internal _ t' h' next =>

```



```

have := restrictedResult_internal_of_identity D_0 j_0 realize
  h' hop next R selectors i k
rw [this]
have ht : t' = t := hunq h'
subst ht
apply le_sSup
exact <next.depth, next,

```

Lean 4 source (lines 7201–7313)

```

      internalChildRealization D_0 j_0 realize h' next R, le_rfl, rfl>
| external _ hex _ =>
  exact False.elim (by cases hex <;> cases hstep)
| probability _ _ _ =>
  cases hstep
| probabilityZero _ =>
  cases hstep
| probabilityOne _ =>
  cases hstep
| measurement _ _ =>
  cases hstep

/-- Pointwise soundness transfers across an identity-operation tree edge.
The child may denote a refinement of the source, as for internal choice. -/
theorem identity_internal_channelTreePointwiseSound {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s t : ChannelConfig C}
  (hstep : ChannelInternalStep s t)
  (hop : channelInternalOperation s = QuantumOperation.identity 2)
  (next : ChannelTree C t)
  (R : ChannelTreeRealization D_0 j_0 realize
    (ChannelTree.internal hstep next))
  {childAnswer answer : HSemanticComp D_0 j_0}
  (hchild : ChannelTreePointwiseSound D_0 j_0 realize childAnswer next
    (internalChildRealization D_0 j_0 realize hstep next R))
  (hle : childAnswer <= answer) :
  ChannelTreePointwiseSound D_0 j_0 realize answer
    (ChannelTree.internal hstep next) R := by
constructor
intro selectors i k
rw [restrictedResult_internal_of_identity D_0 j_0 realize hstep hop
  next R selectors i k]
exact (hchild.restricted_le_selected selectors i k).trans (by
  rw [HardwareAdequacy.selectPath_apply_encode,
    HardwareAdequacy.selectPath_apply_encode]
  exact hle (HardwareAdequacy.encodePath selectors i) k)

/-- Completeness transfers across any unique-successor identity
administrative step. Restricted instruments compose by reindexing; the
selector path is unchanged. -/
theorem identity_step_channelTreeCompleteness {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s t : ChannelConfig C} {denotation : HSemanticComp D_0 j_0}
  (hstep : ChannelInternalStep s t)
  (hop : channelInternalOperation s = QuantumOperation.identity 2)
  (hunq : forall {t'}, ChannelInternalStep s t' -> t' = t)
  (hcomplete : ChannelTreeCompleteness D_0 j_0 realize t denotation) :
  ChannelTreeCompleteness D_0 j_0 realize s denotation where

```

```

selected_result_eq_channelTree_sup := by
  intro selectors i k
  rw [hcomplete.selected_result_eq_channelTree_sup]
  apply le_antisymm
  * apply sSup_le
    rintro T <fuel, child, R, hdepth, rfl>
    apply le_sSup
    refine <fuel + 1, ChannelTree.internal hstep child,
      wrapInternalRealization D_0 j_0 realize hstep child R, ?_, ?_>
    * change child.depth + 1 <= fuel + 1
      omega
    * exact
      (restrictedResult_internal_of_identity D_0 j_0 realize hstep hop
        child (wrapInternalRealization D_0 j_0 realize hstep child R)
        selectors i k).symm
  * apply sSup_le
    rintro T <_, tree, R, _, rfl>
    exact restrictedResult_of_unique_identity D_0 j_0 realize hstep hop
      hunq tree R selectors i k

/-- Presented completeness transfers across a unique-successor identity
administrative step. This is the form used by the general higher-order
fundamental lemma, whose final continuations are finitely represented. -/
theorem identity_step_presentedChannelTreeCompleteness {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s t : ChannelConfig C} {denotation : HSemanticComp D_0 j_0}
  (hstep : ChannelInternalStep s t)
  (hop : channelInternalOperation s = QuantumOperation.identity 2)
  (hunq : forall {t'}, ChannelInternalStep s t' -> t' = t)
  (hcomplete : PresentedChannelTreeCompleteness D_0 j_0 realize
    t denotation) :
  PresentedChannelTreeCompleteness D_0 j_0 realize s denotation where
selected_result_eq_channelTree_sup_presented := by
  intro selectors i ? k hk
  rw [hcomplete.selected_result_eq_channelTree_sup_presented
    selectors i ? k hk]
  apply le_antisymm
  * apply sSup_le
    rintro T <fuel, child, R, hdepth, rfl>
    apply le_sSup
    refine <fuel + 1, ChannelTree.internal hstep child,
      wrapInternalRealization D_0 j_0 realize hstep child R, ?_, ?_>
    * change child.depth + 1 <= fuel + 1
      omega
    * exact
      (restrictedResult_internal_of_identity D_0 j_0 realize hstep hop
        child (wrapInternalRealization D_0 j_0 realize hstep child R)
        selectors i k).symm
  * apply sSup_le
    rintro T <_, tree, R, _, rfl>
    exact restrictedResult_of_unique_identity D_0 j_0 realize hstep hop
      hunq tree R selectors i k

end HardwareChannelSemantics
end QLambda

```

A.20 QLambda/HardwareChannel/Coverage.lean

141 lines.

Lean 4 source

```
/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/
import QLambda.HardwareChannel.Productive

/-!
# Closed stuck-free coverage

Final entry-point layer for the closed fragments whose channel-tree
completeness has been established. The predicate stores each route's
actual side conditions: only the path-productive branch needs
`MeasureDistinct`, while restricted extern applications use their
direct completeness theorem.
-/

namespace QLambda
namespace HardwareChannelSemantics

open Matrix
open scoped ComplexOrder MatrixOrder

open HardwareOperational
open HardwareObservation
open HardwareAdequacy
open HardwareLogicalRelation
open TTPhysicalPrimitives
open TTPhysicalEmbedding
open TTContinuation
open Scott1972.ContinuousLattice

/-- Named coverage boundary for closed programs known not to get stuck.

`productiveCase` accepts the complete `ProductiveClosedCase` interface.
The separate `restrictedExtern` constructor records that its direct
completeness proof does not require `MeasureDistinct`. -/
inductive ClosedStuckFreeCoverage {C : Type}
  {D_0 : QDomain.{0}}
  {j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEstablishedContinuationPower 2)) D_0.carrier)}
  (realize : C -> HSemanticValue D_0 j_0)
  (code : Term (QubitPrimitive C)) : Prop where
| noApp :
  Closed code ->
  NoApp code ->
  ClosedStuckFreeCoverage realize code
| funAppFrag :
  Closed code ->
  FunAppFrag code ->
  ClosedStuckFreeCoverage realize code
| produces :
  Closed code ->
  Produces 0 code ->
  ClosedStuckFreeCoverage realize code
| productiveCase :
  Closed code ->
  ProductiveClosedCase code ->
```

```

    MeasureDistinct realize code ->
    ClosedStuckFreeCoverage realize code
| restrictedExtern :
    Closed code ->
    RestrictedExternApplication code ->
    ClosedStuckFreeCoverage realize code

/-- Every covered closed program has presented channel-tree completeness. -/
theorem closed_stuck_free_presented_channelTreeCompleteness
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (code : Term (QubitPrimitive C))
  (hcoverage : ClosedStuckFreeCoverage realize code)
  (quantum : NormalizedDensity 2)
  (semanticEnv : Env (HSemanticValue D_0 j_0)) :
  PresentedChannelTreeCompleteness D_0 j_0 realize
    (initialChannelConfig code quantum)
    (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv) := by
cases hcoverage with
| noApp hclosed hnoapp =>
  exact closed_term_presented_channelTreeCompleteness_of_noApp
    D_0 j_0 realize code hclosed hnoapp quantum semanticEnv
| funAppFrag hclosed hfrag =>
  exact closed_funAppFrag_presented_channelTreeCompleteness
    D_0 j_0 realize code hclosed hfrag quantum semanticEnv
| produces hclosed hprod =>
  exact closed_produces_presented_channelTreeCompleteness
    D_0 j_0 realize code hclosed hprod quantum semanticEnv
| productiveCase hclosed hcase hdist =>
  exact closed_term_presented_channelTreeCompleteness_of_productive_case
    D_0 j_0 realize code hclosed hcase hdist quantum semanticEnv
| restrictedExtern hclosed hcase =>
  cases hcase with
  | lam x body left right hnoapp hadminBody _ _ hadminL hadminR =>
    exact
      closed_lam_extern_admin_noapp_presented_channelTreeCompleteness
        D_0 j_0 realize x body left right hclosed hnoapp hadminBody
          hadminL hadminR quantum semanticEnv
  | recLam self x body left right hnoapp hadminBody _ _ hadminL hadminR =>
    exact
      closed_recLam_extern_admin_noapp_presented_channelTreeCompleteness
        D_0 j_0 realize self x body left right hclosed hnoapp hadminBody
          hadminL hadminR quantum semanticEnv

/-- Token adequacy at the consolidated closed stuck-free boundary. -/
theorem closed_stuck_free_presented_token_adequacy
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (code : Term (QubitPrimitive C))
  (hcoverage : ClosedStuckFreeCoverage realize code)
  (quantum : NormalizedDensity 2)
  (semanticEnv : Env (HSemanticValue D_0 j_0))
  (selectors : List Bool)
  (? : HSemanticValue D_0 j_0 -> FiniteInstrumentComp 2 PUnit.{1})
  (k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2))
  (hk : forall d, k d = (? d).satisfiedTTTheory resultCode)
  (i : Nat) (token : TTObservationToken 2) :

```

```

token in HardwareAdequacy.selectPath selectors
  (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv)
  i k <->
exists fuel, exists (tree : ChannelTree C
  (initialChannelConfig code quantum))
  (R : ChannelTreeRealization D_0 j_0 realize tree),
tree.depth <= fuel /\
ResultAvailable tree selectors i /\
TTObservationToken.Holds resultCode token
  ((restrictedInstrument D_0 j_0 realize tree R selectors i).bind
  ?) :=
presented_channel_tree_token_adequacy_iff D_0 j_0 realize
  (initialChannelConfig code quantum)
  (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv)
  (closed_stuck_free_presented_channelTreeCompleteness
  D_0 j_0 realize code hcoverage quantum semanticEnv)
  selectors ? k hk i token

end HardwareChannelSemantics
end QLambda

```

A.21 QLambda/HardwareChannel/FunApp.lean

3099 lines.

Lean 4 source (lines 1–400)

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/
import QLambda.HardwareChannel.UnderFrame

/-!
# FunAppFrag and Produces inductions

Layer of the hardware channel-tree semantics. All layers share the
`QLambda.HardwareChannelSemantics` namespace; import
`QLambda.HardwareChannelSemantics` for the full module.
-/

set_option maxHeartbeats 800000

namespace QLambda
namespace HardwareChannelSemantics

open Matrix
open scoped ComplexOrder MatrixOrder

open HardwareOperational
open HardwareObservation
open HardwareAdequacy
open HardwareLogicalRelation
open TTPhysicalPrimitives
open TTPhysicalEmbedding
open TTContinuation
open Scott1972.ContinuousLattice

/-- Value completeness under a list of ordinary closure frames. -/
def ValueUnderFunFrames {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier

```

```

    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (frames : List (Name x Term (QubitPrimitive C) x RuntimeEnv C)) :
  Prop :=
forall {s : ChannelConfig C} {arg : RuntimeValue C}
  {answer : HSemanticComp D_0 j_0},
  s.control = .value arg ->
  s.stack = functionStack frames ->
  ChannelConfig.WellScoped s ->
  ChannelConfigRel D_0 j_0 realize s answer ->
  PresentedChannelConfigCompleteness D_0 j_0 realize s answer

theorem valueUnderFunFrames_nil
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0) :
  ValueUnderFunFrames D_0 j_0 realize [] := by
intro s arg answer hc hs hscoped hrel
exact
  { related := hrel
    complete :=
      terminal_presentedChannelTreeCompleteness D_0 j_0 realize
        <arg, hc, hs> hscoped hrel }

theorem pauliX_under_fun_frames_of_value
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (frames : List (Name x Term (QubitPrimitive C) x RuntimeEnv C))
  (hVal : ValueUnderFunFrames D_0 j_0 realize frames)
  {s : ChannelConfig C} {value : C} {answer : HSemanticComp D_0 j_0}
  (hc : s.control = .term (.prim (.pauliX value)))
  (hs : s.stack = functionStack frames)
  (hneFrames : frames != [])
  (hscoped : ChannelConfig.WellScoped s)
  (hrel : ChannelConfigRel D_0 j_0 realize s answer) :
  PresentedChannelConfigCompleteness D_0 j_0 realize s answer := by
have hsPx :
  {s with control := .term (.prim (.pauliX value))} = s :=
  ChannelConfig.ext hc.symm rfl rfl rfl
obtain <semanticEnv, kStack, henv, hstack, rfl> :=
  channelConfigRel_term_inv D_0 j_0 hc hrel
let sVal : ChannelConfig C :=
  {s with
    control := .value (.payload value)
    quantum := applyOperation Qubit.pauliXOp s.quantum}
have hstep : ChannelInternalStep s sVal := by
  have happ :
    ChannelInternalStep
      {s with control := .term (.prim (.pauliX value))}
      sVal :=
    ChannelInternalStep.pauliXPrimitive (s := s) (value := value)
exact hsPx.symm |> happ
have hscopedVal : ChannelConfig.WellScoped sVal :=
  ChannelInternalStep.preserve_wellScoped hstep hscoped
have hrelVal : ChannelConfigRel D_0 j_0 realize sVal
  (kStack
    (semanticUnit (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0) (realize value))) :=

```

```

<semanticUnit (Q := TTEExternalContinuationPower 2)
  (D_0 := D_0) (j_0 := j_0) (realize value),
  kStack,
  ControlRel.value _ _ s.env
  (payload_related D_0 j_0 realize value),
  hstack, rfl>
have hval :=
  hVal (s := sVal) (arg := .payload value) rfl hs hscopedVal
  hrelVal
refine
  { related := hrel
    complete := ?_ }
constructor
intro selectors i ? k? hk
have hchildEq :=
  hval.complete.selected_result_eq_channelTree_sup_presented
  selectors i ? k? hk
have hden :
  interp (hardwarePrimitive D_0 j_0 realize)
    (.prim (.pauliX value)) semanticEnv =
    taggedEmbed
      (FiniteInstrumentComp.ofOperation Qubit.pauliXOp
        (realize value)) := by
  simp [hardwarePrimitive_pauliX]
have hne : s.stack != [] := by
  rw [hs]
  intro hstack
  exact hneFrames (functionStack_eq_nil_iff.mp hstack)
let unitVal : HSemanticComp D_0 j_0 :=
  semanticUnit (Q := TTEExternalContinuationPower 2)
  (D_0 := D_0) (j_0 := j_0) (realize value)
let opVal : HSemanticComp D_0 j_0 :=
  taggedEmbed
    (FiniteInstrumentComp.ofOperation Qubit.pauliXOp
      (realize value))
have hchildCoord :
  kStack unitVal (HardwareAdequacy.encodePath selectors i) k? =
  sSup (channelTreeResults D_0 j_0 realize sVal selectors i
    k?) := by
  have hsel :
    HardwareAdequacy.selectPath selectors (kStack unitVal) i k? =
    kStack unitVal (HardwareAdequacy.encodePath selectors i)
    k? :=
    congrArg (fun f => f k?)
    (HardwareAdequacy.selectPath_apply_encode selectors
      (kStack unitVal) i)
  exact hsel.symm.trans hchildEq
have hselParent :
  HardwareAdequacy.selectPath selectors (kStack opVal) i k? =
  kStack opVal (HardwareAdequacy.encodePath selectors i) k? :=
  congrArg (fun f => f k?)
  (HardwareAdequacy.selectPath_apply_encode selectors
    (kStack opVal) i)
have hop :
  kStack opVal (HardwareAdequacy.encodePath selectors i) k? =
  embed (FiniteInstrumentComp.ofOperation Qubit.pauliXOp
    (realize value))
  (ScottMap.const
    (kStack unitVal (HardwareAdequacy.encodePath selectors i)
      k?)) :=
  stackRel_ofOperation_eval D_0 j_0 hstack hne
  Qubit.pauliXOp (realize value)
  (HardwareAdequacy.encodePath selectors i) k?

```

```

rw [hden, hselParent, hop, hchildCoord, embed_ofOperation_const_sSup]
apply le_antisymm
* apply sSup_le
  rintro T <r, <fuel, child, R, hdepth, rfl>, rfl>
  apply le_sSup
  refine <fuel + 1, ChannelTree.internal hstep child,
    wrapInternalRealization D_0 j_0 realize hstep child R, ?_, ?_>
  * change child.depth + 1 <= fuel + 1
  omega
  * exact
    (restrictedResult_internal_pauliX D_0 j_0 realize hstep hc
      child
      (wrapInternalRealization D_0 j_0 realize hstep child R)
      selectors i ? k? hk).symm
* apply sSup_le
  rintro T <_, tree, R, _, rfl>
  cases tree with
  | terminal hterm =>
    cases hterm.control_eq.symm.trans hc
  | @internal _ t' h next =>
    have ht : t' = sVal :=
      ChannelInternalStep.eq_config_of_pauliX h hc
    subst t'
    rw [restrictedResult_internal_pauliX D_0 j_0 realize h hc
      next R selectors i ? k? hk]
    apply le_sSup
    refine <restrictedResult D_0 j_0 realize next
      (internalChildRealization D_0 j_0 realize h next R)
      selectors i k?,
      <next.depth, next,
      internalChildRealization D_0 j_0 realize h next R,
      le_rfl, rfl>, rfl>
  | external _ hex _ =>
    exact False.elim (ChannelExternalStep.not_prim hex hc)
  | probability _ _ _ =>
    cases hc
  | probabilityZero _ =>
    cases hc
  | probabilityOne _ =>
    cases hc
  | measurement _ _ =>
    cases hc

theorem admin_noapp_under_fun_frames_of_value
{C : Type}
(D_0 : QDomain.{0})
(j_0 : IsContinuousLatticeProjection D_0.carrier
  (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
(realize : C -> HSemanticValue D_0 j_0)
(frames : List (Name x Term (QubitPrimitive C) x RuntimeEnv C))
(hVal : ValueUnderFunFrames D_0 j_0 realize frames)
{s : ChannelConfig C} {code : Term (QubitPrimitive C)}
{answer : HSemanticComp D_0 j_0}
(hadmin : AdminNoApp code)
(hc : s.control = .term code)
(hs : s.stack = functionStack frames)
(hneFrames : frames != [])
(hscoped : ChannelConfig.WellScoped s)
(hrel : ChannelConfigRel D_0 j_0 realize s answer) :
PresentedChannelConfigCompleteness D_0 j_0 realize s answer := by
induction code generalizing s answer with
| var z =>
  have hctl := hscoped.left

```



```

rw [hc] at hctl
obtain <v, hlookup> := hctl.right z (by simp [free])
have hsVar :
  {s with control := .term (.var z)} = s :=
  ChannelConfig.ext hc.symm rfl rfl rfl
have hrelVar : ChannelConfigRel D_0 j_0 realize
  {s with control := .term (.var z)} answer :=
  hsVar.symm |> hrel
have hrelVal :=
  channel_config_variable D_0 j_0 hlookup hrelVar
have hscopedVal : ChannelConfig.WellScoped
  {s with control := .value v} :=
  <(hctl.left, hctl.left z v hlookup), hscoped.right>
have hval :=
  hVal (s := {s with control := .value v}) (arg := v)
  rfl hs hscopedVal hrelVal
exact variable_presentedChannelConfigCompleteness D_0 j_0 realize
  hc hlookup hrel hval
| app _ _ =>
  exact False.elim hadmin
| lam z M _ih =>
  have hSLam :
    {s with control := .term (.lam z M)} = s :=
    ChannelConfig.ext hc.symm rfl rfl rfl
  have hrelLam : ChannelConfigRel D_0 j_0 realize
    {s with control := .term (.lam z M)} answer :=
    hSLam.symm |> hrel
  have hrelVal :=
    channel_config_lambda D_0 j_0 (s := s) hrelLam
  have hstepLam : ChannelInternalStep s
    {s with control := .value (.closure z M s.env)} := by
  have happ :
    ChannelInternalStep
    {s with control := .term (.lam z M)}
    {s with control := .value (.closure z M s.env)} :=
    ChannelInternalStep.lambda (s := s) (x := z) (body := M)
  exact hSLam.symm |> happ
  have hscopedVal : ChannelConfig.WellScoped
    {s with control := .value (.closure z M s.env)} :=
    ChannelInternalStep.preserve_wellScoped hstepLam hscoped
  have hval :=
    hVal (s := {s with control := .value (.closure z M s.env)})
    (arg := .closure z M s.env) rfl hs hscopedVal hrelVal
  exact lambda_presentedChannelConfigCompleteness D_0 j_0 realize
    hc hrel hval
| recLam self z M _ih =>
  have hsRec :
    {s with control := .term (.recLam self z M)} = s :=
    ChannelConfig.ext hc.symm rfl rfl rfl
  have hrelRec : ChannelConfigRel D_0 j_0 realize
    {s with control := .term (.recLam self z M)} answer :=
    hsRec.symm |> hrel
  have hrelVal :=
    channel_config_recursive D_0 j_0 (s := s) hrelRec
  have hstepRec : ChannelInternalStep s
    {s with control := .value (.recClosure self z M s.env)} := by
  have happ :
    ChannelInternalStep
    {s with control := .term (.recLam self z M)}
    {s with
      control := .value (.recClosure self z M s.env)} :=
    ChannelInternalStep.recursive (s := s) (self := self)
    (arg := z) (body := M)

```

```

    exact hsRec.symm |> happ
  have hscopedVal : ChannelConfig.WellScoped
    {s with control := .value (.recClosure self z M s.env)} :=
    ChannelInternalStep.preserve_wellScoped hstepRec hscoped
  have hval :=
    hVal
    (s :=
      {s with control := .value (.recClosure self z M s.env)})
    (arg := .recClosure self z M s.env) rfl hs hscopedVal
    hrelVal
  exact recLam_presentedChannelConfigCompleteness D_0 j_0 realize
    hc hrel hval
| intern left right ihL ihR =>
  have <hnaL, hnaR> := hadmin
  have hscopedL :=
    wellScoped_term_child (child := left) hc hscoped
    (fun z hz => by simp [free, hz])
  have hscopedR :=
    wellScoped_term_child (child := right) hc hscoped
    (fun z hz => by simp [free, hz])
  refine intern_related_presentedChannelConfigCompleteness
    D_0 j_0 realize hc hrel ?_ ?_
  * intro semanticEnv k henv hstack
    exact ihL hnaL (s := {s with control := .term left}) rfl hs
      hscopedL
      <interp (hardwarePrimitive D_0 j_0 realize) left semanticEnv, k,
        ControlRel.term left s.env semanticEnv henv, hstack, rfl>
  * intro semanticEnv k henv hstack
    exact ihR hnaR (s := {s with control := .term right}) rfl hs
      hscopedR
      <interp (hardwarePrimitive D_0 j_0 realize) right semanticEnv, k,
        ControlRel.term right s.env semanticEnv henv, hstack, rfl>
| extern _ _ _ =>
  exact False.elim hadmin
| prob p left right ihL ihR =>
  have <hnaL, hnaR> := hadmin
  have hscopedL :=
    wellScoped_term_child (child := left) hc hscoped
    (fun z hz => by simp [free, hz])
  have hscopedR :=
    wellScoped_term_child (child := right) hc hscoped
    (fun z hz => by simp [free, hz])
  refine prob_related_presentedChannelConfigCompleteness
    D_0 j_0 realize hc hrel ?_ ?_
  * intro semanticEnv k quantum henv hstack
    exact ihL hnaL
      (s := {s with control := .term left, quantum := quantum})
      rfl hs <hscopedL.left, hscopedL.right>
      <interp (hardwarePrimitive D_0 j_0 realize) left semanticEnv, k,
        ControlRel.term left s.env semanticEnv henv, hstack, rfl>
  * intro semanticEnv k quantum henv hstack
    exact ihR hnaR
      (s := {s with control := .term right, quantum := quantum})
      rfl hs <hscopedR.left, hscopedR.right>
      <interp (hardwarePrimitive D_0 j_0 realize) right semanticEnv, k,
        ControlRel.term right s.env semanticEnv henv, hstack, rfl>
| prim prim =>
  cases prim with
| ret value =>
  have hsRet :
    {s with control := .term (.prim (.ret value))} = s :=
    ChannelConfig.ext hc.symm rfl rfl rfl
  have hrelRet : ChannelConfigRel D_0 j_0 realize

```

```

      {s with control := .term (.prim (.ret value))} answer :=
    hsRet.symm |> hrel
  have hrelVal :=
    channel_config_return D_0 j_0 hrelRet
  have hstepRet : ChannelInternalStep s
    {s with control := .value (.payload value)} := by
    have happ :
      ChannelInternalStep
        {s with control := .term (.prim (.ret value))}
        {s with control := .value (.payload value)} :=
      ChannelInternalStep.returnPrimitive (s := s)
      (value := value)
    exact hsRet.symm |> happ
  have hscopedVal : ChannelConfig.WellScoped
    {s with control := .value (.payload value)} :=
    ChannelInternalStep.preserve_wellScoped hstepRet hscoped
  have hval :=
    hVal (s := {s with control := .value (.payload value)})
    (arg := .payload value) rfl hs hscopedVal hrelVal
  exact return_presentedChannelConfigCompleteness D_0 j_0 realize
    hc hrel hval
| pauliX value =>
  exact
    pauliX_under_fun_frames_of_value
      D_0 j_0 realize frames hVal hc hs hneFrames hscoped hrel
| measureZ _ _ =>
  exact False.elim hadmin

/-- Value completeness under a mixed ordinary/recursive function-frame
spine over leftover argument frames. -/
def ValueUnderFunFrameSpine {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (frames : List (FunFrame C))
  (args : List (Term (QubitPrimitive C) x RuntimeEnv C)) :
  Prop :=
forall {s : ChannelConfig C} {arg : RuntimeValue C}
  {answer : HSemanticComp D_0 j_0},
  s.control = .value arg ->
  s.stack = funFrameStack frames ++ argumentStack args ->
  ChannelConfig.WellScoped s ->
  ChannelConfigRel D_0 j_0 realize s answer ->
  PresentedChannelConfigCompleteness D_0 j_0 realize s answer

theorem valueUnderFunFrameSpine_nil
  {C : Type}
  (D_0 : QDomain.{0})

```

Lean 4 source (lines 401–800)

```

(j_0 : IsContinuousLatticeProjection D_0.carrier
  (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
(realize : C -> HSemanticValue D_0 j_0) :
ValueUnderFunFrameSpine D_0 j_0 realize [] [] := by
intro s arg answer hc hs hscoped hrel
have hs' : s.stack = [] := by simp [funFrameStack, argumentStack] using hs
exact
{ related := hrel
  complete :=
    terminal_presentedChannelTreeCompleteness D_0 j_0 realize
      <arg, hc, hs'> hscoped hrel }

```

```

theorem pauliX_under_fun_frame_spine_of_value
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (frames : List (FunFrame C))
  (args : List (Term (QubitPrimitive C) x RuntimeEnv C))
  (hne : frames != [])
  (hVal : ValueUnderFunFrameSpine D_0 j_0 realize frames args)
  {s : ChannelConfig C} {value : C} {answer : HSemanticComp D_0 j_0}
  (hc : s.control = .term (.prim (.pauliX value)))
  (hs : s.stack = funFrameStack frames ++ argumentStack args)
  (hscoped : ChannelConfig.WellScoped s)
  (hrel : ChannelConfigRel D_0 j_0 realize s answer) :
  PresentedChannelConfigCompleteness D_0 j_0 realize s answer := by
have hsPx :
  {s with control := .term (.prim (.pauliX value))} = s :=
  ChannelConfig.ext hc.symm rfl rfl rfl
obtain <semanticEnv, kStack, henv, hstack, rfl> :=
  channelConfigRel_term_inv D_0 j_0 hc hrel
let sVal : ChannelConfig C :=
  {s with
    control := .value (.payload value)
    quantum := applyOperation Qubit.pauliXOp s.quantum}
have hstep : ChannelInternalStep s sVal := by
  have happ :
    ChannelInternalStep
      {s with control := .term (.prim (.pauliX value))}
      sVal :=
    ChannelInternalStep.pauliXPrimitive (s := s) (value := value)
  exact hsPx.symm |> happ
have hscopedVal : ChannelConfig.WellScoped sVal :=
  ChannelInternalStep.preserve_wellScoped hstep hscoped
have hrelVal : ChannelConfigRel D_0 j_0 realize sVal
  (kStack
    (semanticUnit (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0) (realize value))) :=
  <semanticUnit (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0) (realize value),
    kStack,
    ControlRel.value _ _ s.env
    (payload_related D_0 j_0 realize value),
    hstack, rfl>
have hval :=
  hVal (s := sVal) (arg := .payload value) rfl hs hscopedVal
  hrelVal
refine
  { related := hrel
    complete := ?_ }
constructor
intro selectors i ? k? hk
have hchildEq :=
  hval.complete.selected_result_eq_channelTree_sup_presented
  selectors i ? k? hk
have hden :
  interp (hardwarePrimitive D_0 j_0 realize)
    (.prim (.pauliX value)) semanticEnv =
  taggedEmbed
    (FiniteInstrumentComp.ofOperation Qubit.pauliXOp
      (realize value)) := by
  simp [hardwarePrimitive_pauliX]
have hneStack : s.stack != [] := by

```

```

    rw [hs]
    match frames, hne with
    | [], hne => exact False.elim (hne rfl)
    | f :: rest, _ =>
        simp [funFrameStack_ne_nil_of_cons f rest]
let unitVal : HSemanticComp D_0 j_0 :=
    semanticUnit (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0) (realize value)
let opVal : HSemanticComp D_0 j_0 :=
    taggedEmbed
        (FiniteInstrumentComp.ofOperation Qubit.pauliXOp
            (realize value))
have hchildCoord :
    kStack unitVal (HardwareAdequacy.encodePath selectors i) k? =
        sSup (channelTreeResults D_0 j_0 realize sVal selectors i
            k?) := by
    have hsel :
        HardwareAdequacy.selectPath selectors (kStack unitVal) i k? =
            kStack unitVal (HardwareAdequacy.encodePath selectors i)
            k? :=
        congrArg (fun f => f k?)
        (HardwareAdequacy.selectPath_apply_encode selectors
            (kStack unitVal) i)
    exact hsel.symm.trans hchildEq
have hselParent :
    HardwareAdequacy.selectPath selectors (kStack opVal) i k? =
        kStack opVal (HardwareAdequacy.encodePath selectors i) k? :=
    congrArg (fun f => f k?)
    (HardwareAdequacy.selectPath_apply_encode selectors
        (kStack opVal) i)
have hop :
    kStack opVal (HardwareAdequacy.encodePath selectors i) k? =
        embed (FiniteInstrumentComp.ofOperation Qubit.pauliXOp
            (realize value))
        (ScottMap.const
            (kStack unitVal (HardwareAdequacy.encodePath selectors i)
                k?)) :=
    stackRel_ofOperation_eval D_0 j_0 hstack hneStack
    Qubit.pauliXOp (realize value)
    (HardwareAdequacy.encodePath selectors i) k?
rw [hden, hselParent, hop, hchildCoord, embed_ofOperation_const_sSup]
apply le_antisymm
* apply sSup_le
rintro T <r, <fuel, child, R, hdepth, rfl>, rfl>
apply le_sSup
refine <fuel + 1, ChannelTree.internal hstep child,
    wrapInternalRealization D_0 j_0 realize hstep child R, ?_, ?_>
* change child.depth + 1 <= fuel + 1
    omega
* exact
    (restrictedResult_internal_pauliX D_0 j_0 realize hstep hc
        child
        (wrapInternalRealization D_0 j_0 realize hstep child R)
        selectors i ? k? hk).symm
* apply sSup_le
rintro T <_, tree, R, _, rfl>
cases tree with
| terminal hterm =>
    cases hterm.control_eq.symm.trans hc
| @internal _ t' h next =>
    have ht : t' = sVal :=
        ChannelInternalStep.eq_config_of_pauliX h hc
    subst t'

```

```

    rw [restrictedResult_internal_pauliX D_0 j_0 realize h hc
      next R selectors i ? k? hk]
  apply le_sSup
  refine <restrictedResult D_0 j_0 realize next
    (internalChildRealization D_0 j_0 realize h next R)
    selectors i k?,
    <next.depth, next,
      internalChildRealization D_0 j_0 realize h next R,
      le_rfl, rfl>, rfl>
| external _ hex _ =>
  exact False.elim (ChannelExternalStep.not_prim hex hc)
| probability _ _ _ =>
  cases hc
| probabilityZero _ =>
  cases hc
| probabilityOne _ =>
  cases hc
| measurement _ _ =>
  cases hc

theorem admin_noapp_under_fun_frame_spine_of_value
{C : Type}
(D_0 : QDomain.{0})
(j_0 : IsContinuousLatticeProjection D_0.carrier
  (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
(realize : C -> HSemanticValue D_0 j_0)
(frames : List (FunFrame C))
(args : List (Term (QubitPrimitive C) x RuntimeEnv C))
(hne : frames != [])
(hVal : ValueUnderFunFrameSpine D_0 j_0 realize frames args)
{s : ChannelConfig C} {code : Term (QubitPrimitive C)}
{answer : HSemanticComp D_0 j_0}
(hadmin : AdminNoApp code)
(hc : s.control = .term code)
(hs : s.stack = funFrameStack frames ++ argumentStack args)
(hscoped : ChannelConfig.WellScoped s)
(hrel : ChannelConfigRel D_0 j_0 realize s answer) :
PresentedChannelConfigCompleteness D_0 j_0 realize s answer := by
induction code generalizing s answer with
| var z =>
  have hctl := hscoped.left
  rw [hc] at hctl
  obtain <v, hlookup> := hctl.right z (by simp [free])
  have hsVar :
    {s with control := .term (.var z)} = s :=
    ChannelConfig.ext hc.symm rfl rfl rfl
  have hrelVar : ChannelConfigRel D_0 j_0 realize
    {s with control := .term (.var z)} answer :=
    hsVar.symm |> hrel
  have hrelVal :=
    channel_config_variable D_0 j_0 hlookup hrelVar
  have hscopedVal : ChannelConfig.WellScoped
    {s with control := .value v} :=
    <<hctl.left, hctl.left z v hlookup>, hscoped.right>
  have hval :=
    hVal (s := {s with control := .value v}) (arg := v)
    rfl hs hscopedVal hrelVal
  exact variable_presentedChannelConfigCompleteness D_0 j_0 realize
    hc hlookup hrel hval
| app _ _ =>
  exact False.elim hadmin
| lam z M _ih =>
  have hsLam :

```

```

      {s with control := .term (.lam z M)} = s :=
    ChannelConfig.ext hc.symm rfl rfl rfl
  have hrelLam : ChannelConfigRel D_0 j_0 realize
    {s with control := .term (.lam z M)} answer :=
    hsLam.symm |> hrel
  have hrelVal :=
    channel_config_lambda D_0 j_0 (s := s) hrelLam
  have hstepLam : ChannelInternalStep s
    {s with control := .value (.closure z M s.env)} := by
  have happ :
    ChannelInternalStep
      {s with control := .term (.lam z M)}
      {s with control := .value (.closure z M s.env)} :=
    ChannelInternalStep.lambda (s := s) (x := z) (body := M)
  exact hsLam.symm |> happ
  have hscopedVal : ChannelConfig.WellScoped
    {s with control := .value (.closure z M s.env)} :=
    ChannelInternalStep.preserve_wellScoped hstepLam hscoped
  have hval :=
    hVal (s := {s with control := .value (.closure z M s.env)})
    (arg := .closure z M s.env) rfl hs hscopedVal hrelVal
  exact lambda_presentedChannelConfigCompleteness D_0 j_0 realize
    hc hrel hval
| recLam self z M _ih =>
  have hsRec :
    {s with control := .term (.recLam self z M)} = s :=
    ChannelConfig.ext hc.symm rfl rfl rfl
  have hrelRec : ChannelConfigRel D_0 j_0 realize
    {s with control := .term (.recLam self z M)} answer :=
    hsRec.symm |> hrel
  have hrelVal :=
    channel_config_recursive D_0 j_0 (s := s) hrelRec
  have hstepRec : ChannelInternalStep s
    {s with control := .value (.recClosure self z M s.env)} := by
  have happ :
    ChannelInternalStep
      {s with control := .term (.recLam self z M)}
      {s with
        control := .value (.recClosure self z M s.env)} :=
    ChannelInternalStep.recursive (s := s) (self := self)
      (arg := z) (body := M)
  exact hsRec.symm |> happ
  have hscopedVal : ChannelConfig.WellScoped
    {s with control := .value (.recClosure self z M s.env)} :=
    ChannelInternalStep.preserve_wellScoped hstepRec hscoped
  have hval :=
    hVal
      (s :=
        {s with control := .value (.recClosure self z M s.env)})
      (arg := .recClosure self z M s.env) rfl hs hscopedVal
      hrelVal
  exact recLam_presentedChannelConfigCompleteness D_0 j_0 realize
    hc hrel hval
| intern left right ihL ihR =>
  have <hnaL, hnaR> := hadmin
  have hscopedL :=
    wellScoped_term_child (child := left) hc hscoped
    (fun z hz => by simp [free, hz])
  have hscopedR :=
    wellScoped_term_child (child := right) hc hscoped
    (fun z hz => by simp [free, hz])
  refine intern_related_presentedChannelConfigCompleteness
    D_0 j_0 realize hc hrel ?_ ?_

```

```

* intro semanticEnv k henv hstack
  exact ihL hnaL (s := {s with control := .term left}) rfl hs
  hscopedL
  <interp (hardwarePrimitive D_0 j_0 realize) left semanticEnv, k,
    ControlRel.term left s.env semanticEnv henv, hstack, rfl>
* intro semanticEnv k henv hstack
  exact ihR hnaR (s := {s with control := .term right}) rfl hs
  hscopedR
  <interp (hardwarePrimitive D_0 j_0 realize) right semanticEnv, k,
    ControlRel.term right s.env semanticEnv henv, hstack, rfl>
| extern _ _ _ =>
  exact False.elim hadmin
| prob p left right ihL ihR =>
  have <hnaL, hnaR> := hadmin
  have hscopedL :=
    wellScoped_term_child (child := left) hc hscoped
    (fun z hz => by simp [free, hz])
  have hscopedR :=
    wellScoped_term_child (child := right) hc hscoped
    (fun z hz => by simp [free, hz])
  refine prob_related_presentedChannelConfigCompleteness
    D_0 j_0 realize hc hrel ?_ ?_
* intro semanticEnv k quantum henv hstack
  exact ihL hnaL
  (s := {s with control := .term left, quantum := quantum})
  rfl hs <hscopedL.left, hscopedL.right>
  <interp (hardwarePrimitive D_0 j_0 realize) left semanticEnv, k,
    ControlRel.term left s.env semanticEnv henv, hstack, rfl>
* intro semanticEnv k quantum henv hstack
  exact ihR hnaR
  (s := {s with control := .term right, quantum := quantum})
  rfl hs <hscopedR.left, hscopedR.right>
  <interp (hardwarePrimitive D_0 j_0 realize) right semanticEnv, k,
    ControlRel.term right s.env semanticEnv henv, hstack, rfl>
| prim prim =>
  cases prim with
| ret value =>
  have hsRet :
    {s with control := .term (.prim (.ret value))} = s :=
    ChannelConfig.ext hc.symm rfl rfl rfl
  have hrelRet : ChannelConfigRel D_0 j_0 realize
    {s with control := .term (.prim (.ret value))} answer :=
    hsRet.symm |> hrel
  have hrelVal :=
    channel_config_return D_0 j_0 hrelRet
  have hstepRet : ChannelInternalStep s
    {s with control := .value (.payload value)} := by
  have happ :
    ChannelInternalStep
      {s with control := .term (.prim (.ret value))}
      {s with control := .value (.payload value)} :=
    ChannelInternalStep.returnPrimitive (s := s)
    (value := value)
  exact hsRet.symm |> happ
  have hscopedVal : ChannelConfig.WellScoped
    {s with control := .value (.payload value)} :=
    ChannelInternalStep.preserve_wellScoped hstepRet hscoped
  have hval :=
    hVal (s := {s with control := .value (.payload value)})
    (arg := .payload value) rfl hs hscopedVal hrelVal
  exact return_presentedChannelConfigCompleteness D_0 j_0 realize
    hc hrel hval
| pauliX value =>

```



```

    exact
      pauliX_under_fun_frame_spine_of_value
        D_0 j_0 realize frames args hne hVal hc hs hscoped hrel
| measureZ _ _ =>
    exact False.elim hadmin

/-- Presented completeness for FunAppFrag under a mixed ordinary /
recursive function-frame spine over leftover argument frames. -/
theorem funAppFrag_under_fun_frame_spine_of_value
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} {code : Term (QubitPrimitive C)}
  {answer : HSemanticComp D_0 j_0}
  (hfrag : FunAppFrag code)
  (frames : List (FunFrame C))
  (args : List (Term (QubitPrimitive C) x RuntimeEnv C))
  (empty : frames = [] -> args = [])
  (hVal : ValueUnderFunFrameSpine D_0 j_0 realize frames args)
  (hc : s.control = .term code)
  (hs : s.stack = funFrameStack frames ++ argumentStack args)
  (hscoped : ChannelConfig.WellScoped s)
  (hrel : ChannelConfigRel D_0 j_0 realize s answer) :
  PresentedChannelConfigCompleteness D_0 j_0 realize s answer := by
  revert frames args s answer empty hVal hc hs hscoped hrel
  induction hfrag with
| admin hadmin =>
  intro
    (s : ChannelConfig C) (answer : HSemanticComp D_0 j_0)
    (frames : List (FunFrame C))
    (args : List (Term (QubitPrimitive C) x RuntimeEnv C))
    empty hVal hc hs hscoped hrel
  if hframes : frames = [] then
    have hargs : args = [] := empty hframes
    subst frames
    subst args
    obtain <semanticEnv, k, henv, hstack, heq> :=
      channelConfigRel_term_inv D_0 j_0 hc hrel
    have hs' : s.stack = [] := by
      simpa [funFrameStack, argumentStack] using hs
    rw [hs'] at hstack
    cases hstack
    exact
      { related := hrel
        complete :=
          PresentedChannelTreeCompleteness.congr rfl heq.symm
            (empty_stack_admin_noapp_presentedChannelTreeCompleteness
              D_0 j_0 realize hadmin hc hs' hscoped henv) }
  else
    exact admin_noapp_under_fun_frame_spine_of_value
      D_0 j_0 realize frames args hframes hVal hadmin
      hc hs hscoped hrel
| @app_lam x body arg hbody harg ihBody ihArg =>
  intro
    (s : ChannelConfig C) (answer : HSemanticComp D_0 j_0)
    (frames : List (FunFrame C))
    (args : List (Term (QubitPrimitive C) x RuntimeEnv C))
    empty hVal hc hs hscoped hrel
  have hsApp :
    {s with control := .term (.app (.lam x body) arg)} = s :=
    ChannelConfig.ext hc.symm rfl rfl rfl

```

```

have hrelApp : ChannelConfigRel D_0 j_0 realize
  {s with control := .term (.app (.lam x body) arg)} answer :=
  hsApp.symm |> hrel
have hrelLam :=
  channel_config_application D_0 j_0 (s := s)
  (fn := .lam x body) (arg := arg) hrelApp
have hrelClo :=
  channel_config_lambda D_0 j_0
  (s := {s with stack := .argument arg s.env :: s.stack})
  hrelLam

```

Lean 4 source (lines 801–1200)

```

have hrelArg :=
  channel_config_evaluateArgument D_0 j_0
  (s :=
    {s with
      control := .value (.closure x body s.env)
      stack := .argument arg s.env :: s.stack})
  (fn := .closure x body s.env) (arg := arg)
  (callEnv := s.env) (rest := s.stack) hrelClo
let sArg : ChannelConfig C :=
  {s with
    control := .term arg
    stack := .function (.closure x body s.env) :: s.stack}
have hstepApp : ChannelInternalStep s
  {s with
    control := .term (.lam x body)
    stack := .argument arg s.env :: s.stack} := by
  have happ :
    ChannelInternalStep
    {s with control := .term (.app (.lam x body) arg)}
    {s with
      control := .term (.lam x body)
      stack := .argument arg s.env :: s.stack} :=
    ChannelInternalStep.application (s := s)
    (fn := .lam x body) (arg := arg)
  exact hsApp.symm |> happ
have hstepLam : ChannelInternalStep
  {s with
    control := .term (.lam x body)
    stack := .argument arg s.env :: s.stack}
  {s with
    control := .value (.closure x body s.env)
    stack := .argument arg s.env :: s.stack} :=
  ChannelInternalStep.lambda
  (s := {s with stack := .argument arg s.env :: s.stack})
  (x := x) (body := body)
have hstepArg : ChannelInternalStep
  {s with
    control := .value (.closure x body s.env)
    stack := .argument arg s.env :: s.stack}
  sArg :=
  ChannelInternalStep.evaluateArgument
  (s :=
    {s with
      control := .value (.closure x body s.env)
      stack := .argument arg s.env :: s.stack})
  (fn := .closure x body s.env) (arg := arg)
  (callEnv := s.env) (rest := s.stack)
have hscopedArg : ChannelConfig.WellScoped sArg :=
  ChannelInternalStep.preserve_wellScoped hstepArg
  (ChannelInternalStep.preserve_wellScoped hstepLam
    (ChannelInternalStep.preserve_wellScoped hstepApp hscoped))

```

```

have hsArg :
  sArg.stack =
    funFrameStack (.clo x body s.env :: frames) ++
      argumentStack args := by
    simp [sArg, hs, funFrameStack]
have hemptyNew :
  (.clo x body s.env :: frames) = [] -> args = [] := by
  intro h; cases h
have hValNew : ValueUnderFunFrameSpine D_0 j_0 realize
  (.clo x body s.env :: frames) args := by
  intro s' arg' answer' hc' hs' hscoped' hrel'
have hsEq :
  {s' with
    control := .value arg'
    stack :=
      .function (.closure x body s.env) ::
        (funFrameStack frames ++ argumentStack args)} = s' :=
    ChannelConfig.ext hc'.symm rfl hs'.symm rfl
have hrelBody :=
  channel_config_beta D_0 j_0 (s := s') (x := x) (body := body)
  (closureEnv := s.env) (arg := arg')
  (rest := funFrameStack frames ++ argumentStack args)
  (hsEq.symm |> hrel')
have hstepBeta : ChannelInternalStep s'
  {s' with
    control := .term body
    env := RuntimeEnv.bind x arg' s.env
    stack := funFrameStack frames ++ argumentStack args} := by
  have happ :
    ChannelInternalStep
      {s' with
        control := .value arg'
        stack :=
          .function (.closure x body s.env) ::
            (funFrameStack frames ++ argumentStack args)}
      {s' with
        control := .term body
        env := RuntimeEnv.bind x arg' s.env
        stack := funFrameStack frames ++ argumentStack args} :=
        ChannelInternalStep.beta (s := s') (x := x) (body := body)
        (closureEnv := s.env) (arg := arg')
        (rest := funFrameStack frames ++ argumentStack args)
    exact hsEq.symm |> happ
have hscopedBody : ChannelConfig.WellScoped
  {s' with
    control := .term body
    env := RuntimeEnv.bind x arg' s.env
    stack := funFrameStack frames ++ argumentStack args} :=
    ChannelInternalStep.preserve_wellScoped hstepBeta hscoped'
have hchild :=
  ihBody
  (s :=
    {s' with
      control := .term body
      env := RuntimeEnv.bind x arg' s.env
      stack := funFrameStack frames ++ argumentStack args})
  (answer := answer') frames args hempty hVal rfl rfl
  hscopedBody hrelBody
exact beta_presentedChannelConfigCompleteness D_0 j_0 realize
  hc' (by simp [funFrameStack] using hs') hrel' hchild
have hargComplete :
  PresentedChannelConfigCompleteness D_0 j_0 realize sArg
  answer :=

```

```

ihArg (s := sArg) (answer := answer)
  (.clo x body s.env :: frames) args hemptyNew hValNew
  rfl hsArg hscopedArg
  (by
    change ChannelConfigRel D_0 j_0 realize
      {s with
        control := .term arg
        env := s.env
        stack :=
          .function (.closure x body s.env) :: s.stack}

    exact hrelArg)
exact stacked_lam_app_presentedChannelConfigCompleteness D_0 j_0
  realize (s := s) (x := x) (body := body) (arg := arg)
  hc hrel hargComplete
| @app_recLam self x body arg hbody harg ihBody ihArg =>
  intro
    (s : ChannelConfig C) (answer : HSemanticComp D_0 j_0)
    (frames : List (FunFrame C))
    (args : List (Term (QubitPrimitive C) x RuntimeEnv C))
    hempty hVal hc hs hscoped hrel
  have hsApp :
    {s with control := .term (.app (.recLam self x body) arg)} =
    s :=
    ChannelConfig.ext hc.symm rfl rfl rfl
  have hrelApp : ChannelConfigRel D_0 j_0 realize
    {s with control := .term (.app (.recLam self x body) arg)}
    answer :=
    hsApp.symm |> hrel
  have hrelRec :=
    channel_config_application D_0 j_0 (s := s)
    (fn := .recLam self x body) (arg := arg) hrelApp
  have hrelClo :=
    channel_config_recursive D_0 j_0
    (s := {s with stack := .argument arg s.env :: s.stack})
    hrelRec
  have hrelArg :=
    channel_config_evaluateArgument D_0 j_0
    (s :=
      {s with
        control := .value (.recClosure self x body s.env)
        stack := .argument arg s.env :: s.stack})
    (fn := .recClosure self x body s.env) (arg := arg)
    (callEnv := s.env) (rest := s.stack) hrelClo
  let sArg : ChannelConfig C :=
    {s with
      control := .term arg
      stack :=
        .function (.recClosure self x body s.env) :: s.stack}
  have hstepApp : ChannelInternalStep s
    {s with
      control := .term (.recLam self x body)
      stack := .argument arg s.env :: s.stack} := by
  have happ :
    ChannelInternalStep
    {s with
      control := .term (.app (.recLam self x body) arg)}
    {s with
      control := .term (.recLam self x body)
      stack := .argument arg s.env :: s.stack} :=
    ChannelInternalStep.application (s := s)
    (fn := .recLam self x body) (arg := arg)
  exact hsApp.symm |> happ

```

```

have hstepRec : ChannelInternalStep
  {s with
    control := .term (.recLam self x body)
    stack := .argument arg s.env :: s.stack}
  {s with
    control := .value (.recClosure self x body s.env)
    stack := .argument arg s.env :: s.stack} :=
ChannelInternalStep.recursive
  (s := {s with stack := .argument arg s.env :: s.stack})
  (self := self) (arg := x) (body := body)
have hstepArg : ChannelInternalStep
  {s with
    control := .value (.recClosure self x body s.env)
    stack := .argument arg s.env :: s.stack}
  sArg :=
ChannelInternalStep.evaluateArgument
  (s :=
    {s with
      control := .value (.recClosure self x body s.env)
      stack := .argument arg s.env :: s.stack})
  (fn := .recClosure self x body s.env) (arg := arg)
  (callEnv := s.env) (rest := s.stack)
have hscopedArg : ChannelConfig.WellScoped sArg :=
ChannelInternalStep.preserve_wellScoped hstepArg
  (ChannelInternalStep.preserve_wellScoped hstepRec
    (ChannelInternalStep.preserve_wellScoped hstepApp hscoped))
have hsArg :
  sArg.stack =
    funFrameStack (.recClo self x body s.env :: frames) ++
      argumentStack args := by
  simp [sArg, hs, funFrameStack]
have hemptyNew :
  (.recClo self x body s.env :: frames) = [] -> args = [] := by
  intro h; cases h
have hValNew : ValueUnderFunFrameSpine D_0 j_0 realize
  (.recClo self x body s.env :: frames) args := by
  intro s' arg' answer' hc' hs' hscoped' hrel'
have hSeq :
  {s' with
    control := .value arg'
    stack :=
      .function (.recClosure self x body s.env) ::
        (funFrameStack frames ++ argumentStack args)} = s' :=
ChannelConfig.ext hc'.symm rfl hs'.symm rfl
have hrelBody :=
channel_config_recBeta D_0 j_0 (s := s') (self := self)
  (x := x) (body := body) (closureEnv := s.env)
  (arg := arg')
  (rest := funFrameStack frames ++ argumentStack args)
  (hSeq.symm |> hrel')
have hstepBeta : ChannelInternalStep s'
  {s' with
    control := .term body
    env :=
      RuntimeEnv.bind x arg'
      (RuntimeEnv.bind self
        (.recClosure self x body s.env) s.env)
    stack := funFrameStack frames ++ argumentStack args} := by
have happ :
ChannelInternalStep
  {s' with
    control := .value arg'
    stack :=

```

```

        .function (.recClosure self x body s.env) ::
          (funFrameStack frames ++ argumentStack args)}
{s' with
  control := .term body
  env :=
    RuntimeEnv.bind x arg'
    (RuntimeEnv.bind self
      (.recClosure self x body s.env) s.env)
  stack := funFrameStack frames ++ argumentStack args} :=
ChannelInternalStep.recBeta (s := s') (self := self)
(x := x) (body := body) (closureEnv := s.env)
(arg := arg')
(rest := funFrameStack frames ++ argumentStack args)
exact hseEq.symm |> happ
have hscopedBody : ChannelConfig.WellScoped
{s' with
  control := .term body
  env :=
    RuntimeEnv.bind x arg'
    (RuntimeEnv.bind self
      (.recClosure self x body s.env) s.env)
  stack := funFrameStack frames ++ argumentStack args} :=
ChannelInternalStep.preserve_wellScoped hstepBeta hscoped'
have hchild :=
ihBody
(s :=
{s' with
  control := .term body
  env :=
    RuntimeEnv.bind x arg'
    (RuntimeEnv.bind self
      (.recClosure self x body s.env) s.env)
  stack := funFrameStack frames ++ argumentStack args})
(answer := answer') frames args empty hVal rfl rfl
hscopedBody hrelBody
exact recBeta_presentedChannelConfigCompleteness D_0 j_0 realize
hc' (by simp [funFrameStack] using hs') hrel' hchild
have hargComplete :
PresentedChannelConfigCompleteness D_0 j_0 realize sArg
answer :=
ihArg (s := sArg) (answer := answer)
(.recClo self x body s.env :: frames) args emptyNew hValNew
rfl hsArg hscopedArg
(by
  change ChannelConfigRel D_0 j_0 realize
  {s with
    control := .term arg
    env := s.env
    stack :=
      .function (.recClosure self x body s.env) ::
        s.stack}
  -
  exact hrelArg)
exact stacked_recLam_app_presentedChannelConfigCompleteness D_0 j_0
realize (s := s) (self := self) (x := x) (body := body)
(arg := arg) hc hrel hargComplete

```

```

/-- Presented completeness for FunAppFrag at any ordinary-closure
function-frame stack, including the empty stack. -/
theorem funAppFrag_under_fun_frames_presentedChannelConfigCompleteness
{C : Type}
(D_0 : QDomain.{0})
(j_0 : IsContinuousLatticeProjection D_0.carrier

```

```

    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} {code : Term (QubitPrimitive C)}
  {answer : HSemanticComp D_0 j_0}
  (hfrag : FunAppFrag code)
  (frames : List (Name x Term (QubitPrimitive C) x RuntimeEnv C))
  (hVal : ValueUnderFunFrames D_0 j_0 realize frames)
  (hc : s.control = .term code)
  (hs : s.stack = functionStack frames)
  (hscoped : ChannelConfig.WellScoped s)
  (hrel : ChannelConfigRel D_0 j_0 realize s answer) :
  PresentedChannelConfigCompleteness D_0 j_0 realize s answer := by
have hVal' : ValueUnderFunFrameSpine D_0 j_0 realize (cloFrames frames) [] := by
  intro s' arg' answer' hc' hs' hscoped' hrel'
  have hs'' : s'.stack = functionStack frames := by
    simp [funFrameStack_cloFrames, argumentStack] using hs'
  exact hVal hc' hs'' hscoped' hrel'
exact funAppFrag_under_fun_frame_spine_of_value D_0 j_0 realize hfrag
  (cloFrames frames) [] (fun _ => rfl) hVal' hc
  (by simp [funFrameStack_cloFrames, argumentStack] using hs)
  hscoped hrel

/-- Empty-stack presented completeness for the body-and-argument
nested lambda application fragment. -/
theorem funAppFrag_empty_presentedChannelConfigCompleteness
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} {code : Term (QubitPrimitive C)}
  {answer : HSemanticComp D_0 j_0}
  (hfrag : FunAppFrag code)
  (hc : s.control = .term code) (hs : s.stack = [])
  (hscoped : ChannelConfig.WellScoped s)
  (hrel : ChannelConfigRel D_0 j_0 realize s answer) :
  PresentedChannelConfigCompleteness D_0 j_0 realize s answer :=
funAppFrag_under_fun_frames_presentedChannelConfigCompleteness
  D_0 j_0 realize hfrag [] (valueUnderFunFrames_nil D_0 j_0 realize)
  hc (by simp [functionStack] using hs) hscoped hrel

/-- Value completeness under one ordinary closure over leftover
argument frames. -/
def ValueUnderFnArg {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (x : Name) (body : Term (QubitPrimitive C))
  (cloEnv : RuntimeEnv C)
  (frames : List (Term (QubitPrimitive C) x RuntimeEnv C)) :
  Prop :=
forall {s : ChannelConfig C} {arg : RuntimeValue C}
  {answer : HSemanticComp D_0 j_0},
  s.control = .value arg ->
  s.stack =
    .function (.closure x body cloEnv) :: argumentStack frames ->
  ChannelConfig.WellScoped s ->
  ChannelConfigRel D_0 j_0 realize s answer ->
  PresentedChannelConfigCompleteness D_0 j_0 realize s answer

theorem pauliX_under_fn_arg_of_value
  {C : Type}

```

```

(D_0 : QDomain.{0})
(j_0 : IsContinuousLatticeProjection D_0.carrier
  (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
(realize : C -> HSemanticValue D_0 j_0)
(frames : List (Term (QubitPrimitive C) x RuntimeEnv C))
{s : ChannelConfig C} {value : C} {x : Name}
{body : Term (QubitPrimitive C)} {cloX : RuntimeEnv C}
(hVal : ValueUnderFnArg D_0 j_0 realize x body cloX frames)
{answer : HSemanticComp D_0 j_0}
(hc : s.control = .term (.prim (.pauliX value)))
(hs : s.stack =
  .function (.closure x body cloX) :: argumentStack frames)
(hscoped : ChannelConfig.WellScoped s)
(hrel : ChannelConfigRel D_0 j_0 realize s answer) :
PresentedChannelConfigCompleteness D_0 j_0 realize s answer := by
have hsPx :
  {s with control := .term (.prim (.pauliX value))} = s :=
  ChannelConfig.ext hc.symm rfl rfl rfl
obtain <semanticEnv, kStack, henv, hstack, rfl> :=
  channelConfigRel_term_inv D_0 j_0 hc hrel
let sVal : ChannelConfig C :=
  {s with
    control := .value (.payload value)
    quantum := applyOperation Qubit.pauliXOp s.quantum}
have hstep : ChannelInternalStep s sVal := by
  have happ :
    ChannelInternalStep
      {s with control := .term (.prim (.pauliX value))}
      sVal :=
    ChannelInternalStep.pauliXPrimitive (s := s) (value := value)
  exact hsPx.symm |> happ
have hscopedVal : ChannelConfig.WellScoped sVal :=
  ChannelInternalStep.preserve_wellScoped hstep hscoped
have hrelVal : ChannelConfigRel D_0 j_0 realize sVal

```

Lean 4 source (lines 1201–1600)

```

(kStack
  (semanticUnit (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0) (realize value))) :=
<semanticUnit (Q := TTEExternalContinuationPower 2)
  (D_0 := D_0) (j_0 := j_0) (realize value),
  kStack,
  ControlRel.value _ _ s.env
  (payload_related D_0 j_0 realize value),
  hstack, rfl>
have hval :=
  hVal (s := sVal) (arg := .payload value) rfl hs hscopedVal
  hrelVal
refine
  { related := hrel
    complete := ?_ }
constructor
intro selectors i ? k? hk
have hchildEq :=
  hval.complete.selected_result_eq_channelTree_sup_presented
  selectors i ? k? hk
have hden :
  interp (hardwarePrimitive D_0 j_0 realize)
    (.prim (.pauliX value)) semanticEnv =
  taggedEmbed
    (FiniteInstrumentComp.ofOperation Qubit.pauliXOp
      (realize value)) := by
simp [hardwarePrimitive_pauliX]

```



```

have hne : s.stack != [] := by
  rw [hs]
  exact List.cons_ne_nil _ _
let unitVal : HSemanticComp D_0 j_0 :=
  semanticUnit (Q := TTEExternalContinuationPower 2)
  (D_0 := D_0) (j_0 := j_0) (realize value)
let opVal : HSemanticComp D_0 j_0 :=
  taggedEmbed
    (FiniteInstrumentComp.ofOperation Qubit.pauliXOp
      (realize value))
have hchildCoord :
  kStack unitVal (HardwareAdequacy.encodePath selectors i) k? =
  sSup (channelTreeResults D_0 j_0 realize sVal selectors i
    k?) := by
  have hsel :
    HardwareAdequacy.selectPath selectors (kStack unitVal) i k? =
    kStack unitVal (HardwareAdequacy.encodePath selectors i)
    k? :=
    congrArg (fun f => f k?)
    (HardwareAdequacy.selectPath_apply_encode selectors
      (kStack unitVal) i)
  exact hsel.symm.trans hchildEq
have hselParent :
  HardwareAdequacy.selectPath selectors (kStack opVal) i k? =
  kStack opVal (HardwareAdequacy.encodePath selectors i) k? :=
  congrArg (fun f => f k?)
  (HardwareAdequacy.selectPath_apply_encode selectors
    (kStack opVal) i)
have hop :
  kStack opVal (HardwareAdequacy.encodePath selectors i) k? =
  embed (FiniteInstrumentComp.ofOperation Qubit.pauliXOp
    (realize value))
    (ScottMap.const
      (kStack unitVal (HardwareAdequacy.encodePath selectors i)
        k?)) :=
  stackRel_ofOperation_eval D_0 j_0 hstack hne
  Qubit.pauliXOp (realize value)
  (HardwareAdequacy.encodePath selectors i) k?
rw [hden, hselParent, hop, hchildCoord, embed_ofOperation_const_sSup]
apply le_antisymm
* apply sSup_le
  rintro T <r, <fuel, child, R, hdepth, rfl>, rfl>
  apply le_sSup
  refine <fuel + 1, ChannelTree.internal hstep child,
    wrapInternalRealization D_0 j_0 realize hstep child R, ?_, ?_>
  * change child.depth + 1 <= fuel + 1
  omega
  * exact
    (restrictedResult_internal_pauliX D_0 j_0 realize hstep hc
      child
      (wrapInternalRealization D_0 j_0 realize hstep child R)
      selectors i ? k? hk).symm
* apply sSup_le
  rintro T <_, tree, R, _, rfl>
  cases tree with
  | terminal hterm =>
    cases hterm.control_eq.symm.trans hc
  | @internal _ t' h next =>
    have ht : t' = sVal :=
      ChannelInternalStep.eq_config_of_pauliX h hc
    subst t'
    rw [restrictedResult_internal_pauliX D_0 j_0 realize h hc
      next R selectors i ? k? hk]

```

```

    apply le_sSup
    refine <restrictedResult D_0 j_0 realize next
      (internalChildRealization D_0 j_0 realize h next R)
      selectors i k?,
      <next.depth, next,
        internalChildRealization D_0 j_0 realize h next R,
        le_rfl, rfl>, rfl>
| external _ hex _ =>
  exact False.elim (ChannelExternalStep.not_prim hex hc)
| probability _ _ _ _ =>
  cases hc
| probabilityZero _ =>
  cases hc
| probabilityOne _ =>
  cases hc
| measurement _ _ =>
  cases hc

/-- Administrative NoApp under one function frame over leftover
arguments, given value completeness at that stack. -/
theorem admin_noapp_under_fn_arg_of_value
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (frames : List (Term (QubitPrimitive C) x RuntimeEnv C))
  {s : ChannelConfig C} {code : Term (QubitPrimitive C)}
  {x : Name} {body : Term (QubitPrimitive C)} {cloX : RuntimeEnv C}
  (hVal : ValueUnderFnArg D_0 j_0 realize x body cloX frames)
  {answer : HSemanticComp D_0 j_0}
  (hadmin : AdminNoApp code)
  (hc : s.control = .term code)
  (hs : s.stack =
    .function (.closure x body cloX) :: argumentStack frames)
  (hscoped : ChannelConfig.WellScoped s)
  (hrel : ChannelConfigRel D_0 j_0 realize s answer) :
  PresentedChannelConfigCompleteness D_0 j_0 realize s answer := by
induction code generalizing s answer with
| var z =>
  have hctl := hscoped.left
  rw [hc] at hctl
  obtain <v, hlookup> := hctl.right z (by simp [free])
  have hsVar :
    {s with control := .term (.var z)} = s :=
    ChannelConfig.ext hc.symm rfl rfl rfl
  have hrelVar : ChannelConfigRel D_0 j_0 realize
    {s with control := .term (.var z)} answer :=
    hsVar.symm |> hrel
  have hrelVal :=
    channel_config_variable D_0 j_0 hlookup hrelVar
  have hscopedVal : ChannelConfig.WellScoped
    {s with control := .value v} :=
    <<hctl.left, hctl.left z v hlookup>, hscoped.right>
  have hval :=
    hVal (s := {s with control := .value v}) (arg := v)
    rfl hs hscopedVal hrelVal
  exact variable_presentedChannelConfigCompleteness D_0 j_0 realize
    hc hlookup hrel hval
| app _ _ =>
  exact False.elim hadmin
| lam z M _ih =>
  have hsLam :

```

```

      {s with control := .term (.lam z M)} = s :=
    ChannelConfig.ext hc.symm rfl rfl rfl
  have hrelLam : ChannelConfigRel D_0 j_0 realize
    {s with control := .term (.lam z M)} answer :=
    hsLam.symm |> hrel
  have hrelVal :=
    channel_config_lambda D_0 j_0 (s := s) hrelLam
  have hstepLam : ChannelInternalStep s
    {s with control := .value (.closure z M s.env)} := by
  have happ :
    ChannelInternalStep
      {s with control := .term (.lam z M)}
      {s with control := .value (.closure z M s.env)} :=
    ChannelInternalStep.lambda (s := s) (x := z) (body := M)
  exact hsLam.symm |> happ
  have hscopedVal : ChannelConfig.WellScoped
    {s with control := .value (.closure z M s.env)} :=
    ChannelInternalStep.preserve_wellScoped hstepLam hscoped
  have hval :=
    hVal (s := {s with control := .value (.closure z M s.env)})
    (arg := .closure z M s.env) rfl hs hscopedVal hrelVal
  exact lambda_presentedChannelConfigCompleteness D_0 j_0 realize
    hc hrel hval
| recLam self z M _ih =>
  have hsRec :
    {s with control := .term (.recLam self z M)} = s :=
    ChannelConfig.ext hc.symm rfl rfl rfl
  have hrelRec : ChannelConfigRel D_0 j_0 realize
    {s with control := .term (.recLam self z M)} answer :=
    hsRec.symm |> hrel
  have hrelVal :=
    channel_config_recursive D_0 j_0 (s := s) hrelRec
  have hstepRec : ChannelInternalStep s
    {s with control := .value (.recClosure self z M s.env)} := by
  have happ :
    ChannelInternalStep
      {s with control := .term (.recLam self z M)}
      {s with
        control := .value (.recClosure self z M s.env)} :=
    ChannelInternalStep.recursive (s := s) (self := self)
      (arg := z) (body := M)
  exact hsRec.symm |> happ
  have hscopedVal : ChannelConfig.WellScoped
    {s with control := .value (.recClosure self z M s.env)} :=
    ChannelInternalStep.preserve_wellScoped hstepRec hscoped
  have hval :=
    hVal
      (s :=
        {s with control := .value (.recClosure self z M s.env)})
      (arg := .recClosure self z M s.env) rfl hs hscopedVal
      hrelVal
  exact recLam_presentedChannelConfigCompleteness D_0 j_0 realize
    hc hrel hval
| intern left right ihL ihR =>
  have <hnaL, hnaR> := hadmin
  have hscopedL :=
    wellScoped_term_child (child := left) hc hscoped
    (fun z hz => by simp [free, hz])
  have hscopedR :=
    wellScoped_term_child (child := right) hc hscoped
    (fun z hz => by simp [free, hz])
  refine intern_related_presentedChannelConfigCompleteness
    D_0 j_0 realize hc hrel ?_ ?_

```

```

* intro semanticEnv k henv hstack
  exact ihL hnaL (s := {s with control := .term left}) rfl hs
  hscopedL
  <interp (hardwarePrimitive D_0 j_0 realize) left semanticEnv, k,
    ControlRel.term left s.env semanticEnv henv, hstack, rfl>
* intro semanticEnv k henv hstack
  exact ihR hnaR (s := {s with control := .term right}) rfl hs
  hscopedR
  <interp (hardwarePrimitive D_0 j_0 realize) right semanticEnv, k,
    ControlRel.term right s.env semanticEnv henv, hstack, rfl>
| extern _ _ _ =>
  exact False.elim hadmin
| prob p left right ihL ihR =>
  have <hnaL, hnaR> := hadmin
  have hscopedL :=
    wellScoped_term_child (child := left) hc hscoped
    (fun z hz => by simp [free, hz])
  have hscopedR :=
    wellScoped_term_child (child := right) hc hscoped
    (fun z hz => by simp [free, hz])
  refine prob_related_presentedChannelConfigCompleteness
    D_0 j_0 realize hc hrel ?_ ?_
* intro semanticEnv k quantum henv hstack
  exact ihL hnaL
  (s := {s with control := .term left, quantum := quantum})
  rfl hs <hscopedL.left, hscopedL.right>
  <interp (hardwarePrimitive D_0 j_0 realize) left semanticEnv, k,
    ControlRel.term left s.env semanticEnv henv, hstack, rfl>
* intro semanticEnv k quantum henv hstack
  exact ihR hnaR
  (s := {s with control := .term right, quantum := quantum})
  rfl hs <hscopedR.left, hscopedR.right>
  <interp (hardwarePrimitive D_0 j_0 realize) right semanticEnv, k,
    ControlRel.term right s.env semanticEnv henv, hstack, rfl>
| prim prim =>
  cases prim with
| ret value =>
  have hsRet :
    {s with control := .term (.prim (.ret value))} = s :=
    ChannelConfig.ext hc.symm rfl rfl rfl
  have hrelRet : ChannelConfigRel D_0 j_0 realize
    {s with control := .term (.prim (.ret value))} answer :=
    hsRet.symm |> hrel
  have hrelVal :=
    channel_config_return D_0 j_0 hrelRet
  have hstepRet : ChannelInternalStep s
    {s with control := .value (.payload value)} := by
  have happ :
    ChannelInternalStep
      {s with control := .term (.prim (.ret value))}
      {s with control := .value (.payload value)} :=
    ChannelInternalStep.returnPrimitive (s := s)
    (value := value)
  exact hsRet.symm |> happ
  have hscopedVal : ChannelConfig.WellScoped
    {s with control := .value (.payload value)} :=
    ChannelInternalStep.preserve_wellScoped hstepRet hscoped
  have hval :=
    hVal (s := {s with control := .value (.payload value)})
    (arg := .payload value) rfl hs hscopedVal hrelVal
  exact return_presentedChannelConfigCompleteness D_0 j_0 realize
    hc hrel hval
| pauliX value =>

```

```

    exact
      pauliX_under_fn_arg_of_value
        D_0 j_0 realize frames hVal hc hs hscoped hrel
  | measureZ _ _ =>
    exact False.elim hadmin

def ValueUnderRecArg {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (self x : Name) (body : Term (QubitPrimitive C))
  (cloEnv : RuntimeEnv C)
  (frames : List (Term (QubitPrimitive C) x RuntimeEnv C)) :
  Prop :=
forall {s : ChannelConfig C} {arg : RuntimeValue C}
  {answer : HSemanticComp D_0 j_0},
  s.control = .value arg ->
  s.stack =
    .function (.recClosure self x body cloEnv) :: argumentStack frames ->
  ChannelConfig.WellScoped s ->
  ChannelConfigRel D_0 j_0 realize s answer ->
  PresentedChannelConfigCompleteness D_0 j_0 realize s answer

theorem pauliX_under_rec_arg_of_value
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (frames : List (Term (QubitPrimitive C) x RuntimeEnv C))
  {s : ChannelConfig C} {value : C} {self x : Name}
  {body : Term (QubitPrimitive C)} {cloX : RuntimeEnv C}
  (hVal : ValueUnderRecArg D_0 j_0 realize self x body cloX frames)
  {answer : HSemanticComp D_0 j_0}
  (hc : s.control = .term (.prim (.pauliX value)))
  (hs : s.stack =
    .function (.recClosure self x body cloX) :: argumentStack frames)
  (hscoped : ChannelConfig.WellScoped s)
  (hrel : ChannelConfigRel D_0 j_0 realize s answer) :
  PresentedChannelConfigCompleteness D_0 j_0 realize s answer := by
have hsPx :
  {s with control := .term (.prim (.pauliX value))} = s :=
  ChannelConfig.ext hc.symm rfl rfl rfl
obtain <semanticEnv, kStack, henv, hstack, rfl> :=
  channelConfigRel_term_inv D_0 j_0 hc hrel
let sVal : ChannelConfig C :=
  {s with
    control := .value (.payload value)
    quantum := applyOperation Qubit.pauliXOp s.quantum}
have hstep : ChannelInternalStep s sVal := by
  have happ :
    ChannelInternalStep
      {s with control := .term (.prim (.pauliX value))}
      sVal :=
    ChannelInternalStep.pauliXPrimitive (s := s) (value := value)
  exact hsPx.symm |> happ
have hscopedVal : ChannelConfig.WellScoped sVal :=
  ChannelInternalStep.preserve_wellScoped hstep hscoped
have hrelVal : ChannelConfigRel D_0 j_0 realize sVal
  (kStack
    (semanticUnit (Q := TTEExternalContinuationPower 2)

```

```

      (D_0 := D_0) (j_0 := j_0) (realize value))) :=
    <semanticUnit (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0) (realize value),
      kStack,
      ControlRel.value _ _ s.env
      (payload_related D_0 j_0 realize value),
      hstack, rfl>
have hval :=
  hVal (s := sVal) (arg := .payload value) rfl hs hscopedVal
  hrelVal
refine
  { related := hrel
    complete := ?_ }
constructor
intro selectors i ? k? hk
have hchildEq :=
  hval.complete.selected_result_eq_channelTree_sup_presented
  selectors i ? k? hk
have hden :
  interp (hardwarePrimitive D_0 j_0 realize)
    (.prim (.pauliX value)) semanticEnv =
    taggedEmbed
      (FiniteInstrumentComp.ofOperation Qubit.pauliXOp
        (realize value)) := by
  simp [hardwarePrimitive_pauliX]
have hne : s.stack != [] := by
  rw [hs]
  exact List.cons_ne_nil _ _
let unitVal : HSemanticComp D_0 j_0 :=
  semanticUnit (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0) (realize value)
let opVal : HSemanticComp D_0 j_0 :=
  taggedEmbed
    (FiniteInstrumentComp.ofOperation Qubit.pauliXOp
      (realize value))
have hchildCoord :
  kStack unitVal (HardwareAdequacy.encodePath selectors i) k? =
  sSup (channelTreeResults D_0 j_0 realize sVal selectors i
    k?) := by
  have hsel :
    HardwareAdequacy.selectPath selectors (kStack unitVal) i k? =
    kStack unitVal (HardwareAdequacy.encodePath selectors i)
    k? :=
    congrArg (fun f => f k?)
    (HardwareAdequacy.selectPath_apply_encode selectors
      (kStack unitVal) i)
  exact hsel.symm.trans hchildEq
have hselParent :
  HardwareAdequacy.selectPath selectors (kStack opVal) i k? =
  kStack opVal (HardwareAdequacy.encodePath selectors i) k? :=
  congrArg (fun f => f k?)
  (HardwareAdequacy.selectPath_apply_encode selectors
    (kStack opVal) i)
have hop :
  kStack opVal (HardwareAdequacy.encodePath selectors i) k? =
  embed (FiniteInstrumentComp.ofOperation Qubit.pauliXOp
    (realize value))
  (ScottMap.const

```

Lean 4 source (lines 1601–2000)

```

      (kStack unitVal (HardwareAdequacy.encodePath selectors i)
        k?)) :=
  stackRel_ofOperation_eval D_0 j_0 hstack hne

```

```

    Qubit.paoliXOp (realize value)
    (HardwareAdequacy.encodePath selectors i) k?
rw [hden, hselParent, hop, hchildCoord, embed_ofOperation_const_sSup]
apply le_antisymm
* apply sSup_le
  rintro T <r, <fuel, child, R, hdepth, rfl>, rfl>
  apply le_sSup
  refine <fuel + 1, ChannelTree.internal hstep child,
    wrapInternalRealization D_0 j_0 realize hstep child R, ?_, ?_>
  * change child.depth + 1 <= fuel + 1
    omega
  * exact
    (restrictedResult_internal_pauliX D_0 j_0 realize hstep hc
      child
      (wrapInternalRealization D_0 j_0 realize hstep child R)
      selectors i ? k? hk).symm
* apply sSup_le
  rintro T <_, tree, R, _, rfl>
  cases tree with
  | terminal hterm =>
    cases hterm.control_eq.symm.trans hc
  | @internal _ t' h next =>
    have ht : t' = sVal :=
      ChannelInternalStep.eq_config_of_pauliX h hc
    subst t'
    rw [restrictedResult_internal_pauliX D_0 j_0 realize h hc
      next R selectors i ? k? hk]
    apply le_sSup
    refine <restrictedResult D_0 j_0 realize next
      (internalChildRealization D_0 j_0 realize h next R)
      selectors i k?,
      <next.depth, next,
        internalChildRealization D_0 j_0 realize h next R,
        le_rfl, rfl>, rfl>
  | external _ hex _ =>
    exact False.elim (ChannelExternalStep.not_prim hex hc)
  | probability _ _ _ =>
    cases hc
  | probabilityZero _ =>
    cases hc
  | probabilityOne _ =>
    cases hc
  | measurement _ _ =>
    cases hc

/-- Administrative NoApp under one recursive-closure frame over leftover
arguments, given value completeness at that stack. -/
theorem admin_noapp_under_rec_arg_of_value
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (frames : List (Term (QubitPrimitive C) x RuntimeEnv C))
  {s : ChannelConfig C} {code : Term (QubitPrimitive C)}
  {self x : Name} {body : Term (QubitPrimitive C)} {cloX : RuntimeEnv C}
  (hVal : ValueUnderRecArg D_0 j_0 realize self x body cloX frames)
  {answer : HSemanticComp D_0 j_0}
  (hadmin : AdminNoApp code)
  (hc : s.control = .term code)
  (hs : s.stack =
    .function (.recClosure self x body cloX) :: argumentStack frames)
  (hscoped : ChannelConfig.WellScoped s)

```

```

(hrel : ChannelConfigRel D_0 j_0 realize s answer) :
  PresentedChannelConfigCompleteness D_0 j_0 realize s answer := by
induction code generalizing s answer with
| var z =>
  have hctl := hscoped.left
  rw [hc] at hctl
  obtain <v, hlookup> := hctl.right z (by simp [free])
  have hsVar :
    {s with control := .term (.var z)} = s :=
    ChannelConfig.ext hc.symm rfl rfl rfl
  have hrelVar : ChannelConfigRel D_0 j_0 realize
    {s with control := .term (.var z)} answer :=
    hsVar.symm |> hrel
  have hrelVal :=
    channel_config_variable D_0 j_0 hlookup hrelVar
  have hscopedVal : ChannelConfig.WellScoped
    {s with control := .value v} :=
    <<hctl.left, hctl.left z v hlookup>, hscoped.right>
  have hval :=
    hVal (s := {s with control := .value v}) (arg := v)
    rfl hs hscopedVal hrelVal
  exact variable_presentedChannelConfigCompleteness D_0 j_0 realize
    hc hlookup hrel hval
| app _ _ =>
  exact False.elim hadmin
| lam z M _ih =>
  have hsLam :
    {s with control := .term (.lam z M)} = s :=
    ChannelConfig.ext hc.symm rfl rfl rfl
  have hrelLam : ChannelConfigRel D_0 j_0 realize
    {s with control := .term (.lam z M)} answer :=
    hsLam.symm |> hrel
  have hrelVal :=
    channel_config_lambda D_0 j_0 (s := s) hrelLam
  have hstepLam : ChannelInternalStep s
    {s with control := .value (.closure z M s.env)} := by
  have happ :
    ChannelInternalStep
    {s with control := .term (.lam z M)}
    {s with control := .value (.closure z M s.env)} :=
    ChannelInternalStep.lambda (s := s) (x := z) (body := M)
    exact hsLam.symm |> happ
  have hscopedVal : ChannelConfig.WellScoped
    {s with control := .value (.closure z M s.env)} :=
    ChannelInternalStep.preserve_wellScoped hstepLam hscoped
  have hval :=
    hVal (s := {s with control := .value (.closure z M s.env)})
    (arg := .closure z M s.env) rfl hs hscopedVal hrelVal
  exact lambda_presentedChannelConfigCompleteness D_0 j_0 realize
    hc hrel hval
| recLam self z M _ih =>
  have hsRec :
    {s with control := .term (.recLam self z M)} = s :=
    ChannelConfig.ext hc.symm rfl rfl rfl
  have hrelRec : ChannelConfigRel D_0 j_0 realize
    {s with control := .term (.recLam self z M)} answer :=
    hsRec.symm |> hrel
  have hrelVal :=
    channel_config_recursive D_0 j_0 (s := s) hrelRec
  have hstepRec : ChannelInternalStep s
    {s with control := .value (.recClosure self z M s.env)} := by
  have happ :
    ChannelInternalStep

```



```

    {s with control := .term (.recLam self z M)}
    {s with
      control := .value (.recClosure self z M s.env)} :=
    ChannelInternalStep.recursive (s := s) (self := self)
      (arg := z) (body := M)
    exact hsRec.symm |> happ
  have hscopedVal : ChannelConfig.WellScoped
    {s with control := .value (.recClosure self z M s.env)} :=
    ChannelInternalStep.preserve_wellScoped hstepRec hscoped
  have hval :=
    hVal
    (s :=
      {s with control := .value (.recClosure self z M s.env)})
    (arg := .recClosure self z M s.env) rfl hs hscopedVal
    hrelVal
  exact recLam_presentedChannelConfigCompleteness D_0 j_0 realize
    hc hrel hval
| intern left right ihL ihR =>
  have <hnaL, hnaR> := hadmin
  have hscopedL :=
    wellScoped_term_child (child := left) hc hscoped
    (fun z hz => by simp [free, hz])
  have hscopedR :=
    wellScoped_term_child (child := right) hc hscoped
    (fun z hz => by simp [free, hz])
  refine intern_related_presentedChannelConfigCompleteness
    D_0 j_0 realize hc hrel ?_ ?_
  * intro semanticEnv k henv hstack
    exact ihL hnaL (s := {s with control := .term left}) rfl hs
      hscopedL
    <interp (hardwarePrimitive D_0 j_0 realize) left semanticEnv, k,
      ControlRel.term left s.env semanticEnv henv, hstack, rfl>
  * intro semanticEnv k henv hstack
    exact ihR hnaR (s := {s with control := .term right}) rfl hs
      hscopedR
    <interp (hardwarePrimitive D_0 j_0 realize) right semanticEnv, k,
      ControlRel.term right s.env semanticEnv henv, hstack, rfl>
| extern _ _ _ =>
  exact False.elim hadmin
| prob p left right ihL ihR =>
  have <hnaL, hnaR> := hadmin
  have hscopedL :=
    wellScoped_term_child (child := left) hc hscoped
    (fun z hz => by simp [free, hz])
  have hscopedR :=
    wellScoped_term_child (child := right) hc hscoped
    (fun z hz => by simp [free, hz])
  refine prob_related_presentedChannelConfigCompleteness
    D_0 j_0 realize hc hrel ?_ ?_
  * intro semanticEnv k quantum henv hstack
    exact ihL hnaL
    (s := {s with control := .term left, quantum := quantum})
    rfl hs <hscopedL.left, hscopedL.right>
    <interp (hardwarePrimitive D_0 j_0 realize) left semanticEnv, k,
      ControlRel.term left s.env semanticEnv henv, hstack, rfl>
  * intro semanticEnv k quantum henv hstack
    exact ihR hnaR
    (s := {s with control := .term right, quantum := quantum})
    rfl hs <hscopedR.left, hscopedR.right>
    <interp (hardwarePrimitive D_0 j_0 realize) right semanticEnv, k,
      ControlRel.term right s.env semanticEnv henv, hstack, rfl>
| prim prim =>
  cases prim with

```

```

| ret value =>
  have hsRet :
    {s with control := .term (.prim (.ret value))} = s :=
    ChannelConfig.ext hc.symm rfl rfl rfl
  have hrelRet : ChannelConfigRel D_0 j_0 realize
    {s with control := .term (.prim (.ret value))} answer :=
    hsRet.symm |> hrel
  have hrelVal :=
    channel_config_return D_0 j_0 hrelRet
  have hstepRet : ChannelInternalStep s
    {s with control := .value (.payload value)} := by
    have happ :
      ChannelInternalStep
        {s with control := .term (.prim (.ret value))}
        {s with control := .value (.payload value)} :=
        ChannelInternalStep.returnPrimitive (s := s)
        (value := value)
    exact hsRet.symm |> happ
  have hscopedVal : ChannelConfig.WellScoped
    {s with control := .value (.payload value)} :=
    ChannelInternalStep.preserve_wellScoped hstepRet hscoped
  have hval :=
    hVal (s := {s with control := .value (.payload value)})
    (arg := .payload value) rfl hs hscopedVal hrelVal
  exact return_presentedChannelConfigCompleteness D_0 j_0 realize
    hc hrel hval
| pauliX value =>
  exact
    pauliX_under_rec_arg_of_value
    D_0 j_0 realize frames hVal hc hs hscoped hrel
| measureZ _ _ =>
  exact False.elim hadmin

/-- Value completeness under a nonempty ordinary-closure spine over
leftover FunAppFrag argument frames. -/
def ValueUnderFunsThenArgs {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (fns : List (Name x Term (QubitPrimitive C) x RuntimeEnv C))
  (args : List (Term (QubitPrimitive C) x RuntimeEnv C)) :
  Prop :=
  forall {s : ChannelConfig C} {arg : RuntimeValue C}
    {answer : HSemanticComp D_0 j_0},
    s.control = .value arg ->
    s.stack = mixedStack fns args ->
    ChannelConfig.WellScoped s ->
    ChannelConfigRel D_0 j_0 realize s answer ->
    PresentedChannelConfigCompleteness D_0 j_0 realize s answer

theorem valueUnderFunsThenArgs_of_fnArg
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {x : Name} {body : Term (QubitPrimitive C)} {cloX : RuntimeEnv C}
  (frames : List (Term (QubitPrimitive C) x RuntimeEnv C))
  (hVal : ValueUnderFnArg D_0 j_0 realize x body cloX frames) :
  ValueUnderFunsThenArgs D_0 j_0 realize [(x, body, cloX)] frames := by
  intro s arg answer hc hs hscoped hrel
  have hs' : s.stack =

```

```

    .function (.closure x body cloX) :: argumentStack frames := by
    simp [mixedStack] using hs
    exact hVal hc hs' hscoped hrel

```

theorem valueUnderFnArg_of_funsThenArgs

```

{C : Type}
(D_0 : QDomain.{0})
(j_0 : IsContinuousLatticeProjection D_0.carrier
  (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
(realize : C -> HSemanticValue D_0 j_0)
{x : Name} {body : Term (QubitPrimitive C)} {cloX : RuntimeEnv C}
(frames : List (Term (QubitPrimitive C) x RuntimeEnv C))
(hVal : ValueUnderFunsThenArgs D_0 j_0 realize [(x, body, cloX)] frames) :
ValueUnderFnArg D_0 j_0 realize x body cloX frames := by
intro s arg answer hc hs hscoped hrel
have hs' : s.stack = mixedStack [(x, body, cloX)] frames := by
  simp [mixedStack] using hs
  exact hVal hc hs' hscoped hrel

```

theorem pauliX_under_funs_then_args_of_value

```

{C : Type}
(D_0 : QDomain.{0})
(j_0 : IsContinuousLatticeProjection D_0.carrier
  (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
(realize : C -> HSemanticValue D_0 j_0)
(fns : List (Name x Term (QubitPrimitive C) x RuntimeEnv C))
(args : List (Term (QubitPrimitive C) x RuntimeEnv C))
(hne : fns != [])
(hVal : ValueUnderFunsThenArgs D_0 j_0 realize fns args)
{s : ChannelConfig C} {value : C} {answer : HSemanticComp D_0 j_0}
(hc : s.control = .term (.prim (.pauliX value)))
(hs : s.stack = mixedStack fns args)
(hscoped : ChannelConfig.WellScoped s)
(hrel : ChannelConfigRel D_0 j_0 realize s answer) :
PresentedChannelConfigCompleteness D_0 j_0 realize s answer := by
have hsPx :
  {s with control := .term (.prim (.pauliX value))} = s :=
  ChannelConfig.ext hc.symm rfl rfl rfl
obtain <semanticEnv, kStack, henv, hstack, rfl> :=
  channelConfigRel_term_inv D_0 j_0 hc hrel
let sVal : ChannelConfig C :=
  {s with
    control := .value (.payload value)
    quantum := applyOperation Qubit.pauliXOp s.quantum}
have hstep : ChannelInternalStep s sVal := by
  have happ :
    ChannelInternalStep
      {s with control := .term (.prim (.pauliX value))}
      sVal :=
    ChannelInternalStep.pauliXPrimitive (s := s) (value := value)
  exact hsPx.symm |> happ
have hscopedVal : ChannelConfig.WellScoped sVal :=
  ChannelInternalStep.preserve_wellScoped hstep hscoped
have hrelVal : ChannelConfigRel D_0 j_0 realize sVal
  (kStack
    (semanticUnit (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0) (realize value))) :=
  <semanticUnit (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0) (realize value),
    kStack,
    ControlRel.value _ _ s.env
    (payload_related D_0 j_0 realize value),
    hstack, rfl>

```

```

have hval :=
  hVal (s := sVal) (arg := .payload value) rfl hs hscopedVal
  hrelVal
refine
  { related := hrel
    complete := ?_ }
constructor
intro selectors i ? k? hk
have hchildEq :=
  hval.complete.selected_result_eq_channelTree_sup_presented
  selectors i ? k? hk
have hden :
  interp (hardwarePrimitive D_0 j_0 realize)
    (.prim (.pauliX value)) semanticEnv =
    taggedEmbed
      (FiniteInstrumentComp.ofOperation Qubit.pauliXOp
        (realize value)) := by
  simp [hardwarePrimitive_pauliX]
have hneStack : s.stack != [] := by
  rw [hs]
  exact mixedStack_ne_nil hne
let unitVal : HSemanticComp D_0 j_0 :=
  semanticUnit (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0) (realize value)
let opVal : HSemanticComp D_0 j_0 :=
  taggedEmbed
    (FiniteInstrumentComp.ofOperation Qubit.pauliXOp
      (realize value))
have hchildCoord :
  kStack unitVal (HardwareAdequacy.encodePath selectors i) k? =
  sSup (channelTreeResults D_0 j_0 realize sVal selectors i
    k?) := by
  have hsel :
    HardwareAdequacy.selectPath selectors (kStack unitVal) i k? =
    kStack unitVal (HardwareAdequacy.encodePath selectors i)
    k? :=
    congrArg (fun f => f k?)
    (HardwareAdequacy.selectPath_apply_encode selectors
      (kStack unitVal) i)
  exact hsel.symm.trans hchildEq
have hselParent :
  HardwareAdequacy.selectPath selectors (kStack opVal) i k? =
  kStack opVal (HardwareAdequacy.encodePath selectors i) k? :=
  congrArg (fun f => f k?)
  (HardwareAdequacy.selectPath_apply_encode selectors
    (kStack opVal) i)
have hop :
  kStack opVal (HardwareAdequacy.encodePath selectors i) k? =
  embed (FiniteInstrumentComp.ofOperation Qubit.pauliXOp
    (realize value))
    (ScottMap.const
      (kStack unitVal (HardwareAdequacy.encodePath selectors i)
        k?)) :=
  stackRel_ofOperation_eval D_0 j_0 hstack hneStack
  Qubit.pauliXOp (realize value)
  (HardwareAdequacy.encodePath selectors i) k?
rw [hden, hselParent, hop, hchildCoord, embed_ofOperation_const_sSup]
apply le_antisymm
* apply sSup_le
rintro T <r, <fuel, child, R, hdepth, rfl>, rfl>
apply le_sSup
refine <fuel + 1, ChannelTree.internal hstep child,
  wrapInternalRealization D_0 j_0 realize hstep child R, ?_, ?_>

```

```

* change child.depth + 1 <= fuel + 1
  omega
* exact
  (restrictedResult_internal_pauliX D_0 j_0 realize hstep hc
   child
   (wrapInternalRealization D_0 j_0 realize hstep child R)
   selectors i ? k? hk).symm
* apply sSup_le
  rintro T <_, tree, R, _, rfl>
  cases tree with
  | terminal hterm =>
    cases hterm.control_eq.symm.trans hc
  | @internal _ t' h next =>
    have ht : t' = sVal :=
      ChannelInternalStep.eq_config_of_pauliX h hc
    subst t'
    rw [restrictedResult_internal_pauliX D_0 j_0 realize h hc
        next R selectors i ? k? hk]
    apply le_sSup

```

Lean 4 source (lines 2001–2400)

```

  refine <restrictedResult D_0 j_0 realize next
    (internalChildRealization D_0 j_0 realize h next R)
    selectors i k?,
    <next.depth, next,
      internalChildRealization D_0 j_0 realize h next R,
      le_rfl, rfl>
  | external _ hex _ =>
    exact False.elim (ChannelExternalStep.not_prim hex hc)
  | probability _ _ _ =>
    cases hc
  | probabilityZero _ =>
    cases hc
  | probabilityOne _ =>
    cases hc
  | measurement _ _ =>
    cases hc

/-- Administrative NoApp under a nonempty ordinary-closure spine over
leftover argument frames, given value completeness at that stack. -/
theorem admin_noapp_under_funs_then_args_of_value
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (fns : List (Name x Term (QubitPrimitive C) x RuntimeEnv C))
  (args : List (Term (QubitPrimitive C) x RuntimeEnv C))
  (hne : fns != [])
  (hVal : ValueUnderFunsThenArgs D_0 j_0 realize fns args)
  {s : ChannelConfig C} {code : Term (QubitPrimitive C)}
  {answer : HSemanticComp D_0 j_0}
  (hadmin : AdminNoApp code)
  (hc : s.control = .term code)
  (hs : s.stack = mixedStack fns args)
  (hscoped : ChannelConfig.WellScoped s)
  (hrel : ChannelConfigRel D_0 j_0 realize s answer) :
  PresentedChannelConfigCompleteness D_0 j_0 realize s answer := by
  induction code generalizing s answer with
  | var z =>
    have hctl := hscoped.left
    rw [hc] at hctl
    obtain <v, hlookup> := hctl.right z (by simp [free])

```

```

have hsVar :
  {s with control := .term (.var z)} = s :=
  ChannelConfig.ext hc.symm rfl rfl rfl
have hrelVar : ChannelConfigRel D_0 j_0 realize
  {s with control := .term (.var z)} answer :=
  hsVar.symm |> hrel
have hrelVal :=
  channel_config_variable D_0 j_0 hlookup hrelVar
have hscopedVal : ChannelConfig.WellScoped
  {s with control := .value v} :=
  <<hctl.left, hctl.left z v hlookup>, hscoped.right>
have hval :=
  hVal (s := {s with control := .value v}) (arg := v)
  rfl hs hscopedVal hrelVal
exact variable_presentedChannelConfigCompleteness D_0 j_0 realize
  hc hlookup hrel hval
| app _ _ =>
  exact False.elim hadmin
| lam z M _ih =>
  have hsLam :
    {s with control := .term (.lam z M)} = s :=
    ChannelConfig.ext hc.symm rfl rfl rfl
  have hrelLam : ChannelConfigRel D_0 j_0 realize
    {s with control := .term (.lam z M)} answer :=
    hsLam.symm |> hrel
  have hrelVal :=
    channel_config_lambda D_0 j_0 (s := s) hrelLam
  have hstepLam : ChannelInternalStep s
    {s with control := .value (.closure z M s.env)} := by
  have happ :
    ChannelInternalStep
    {s with control := .term (.lam z M)}
    {s with control := .value (.closure z M s.env)} :=
    ChannelInternalStep.lambda (s := s) (x := z) (body := M)
  exact hsLam.symm |> happ
  have hscopedVal : ChannelConfig.WellScoped
    {s with control := .value (.closure z M s.env)} :=
    ChannelInternalStep.preserve_wellScoped hstepLam hscoped
  have hval :=
    hVal (s := {s with control := .value (.closure z M s.env)})
    (arg := .closure z M s.env) rfl hs hscopedVal hrelVal
  exact lambda_presentedChannelConfigCompleteness D_0 j_0 realize
    hc hrel hval
| recLam self z M _ih =>
  have hsRec :
    {s with control := .term (.recLam self z M)} = s :=
    ChannelConfig.ext hc.symm rfl rfl rfl
  have hrelRec : ChannelConfigRel D_0 j_0 realize
    {s with control := .term (.recLam self z M)} answer :=
    hsRec.symm |> hrel
  have hrelVal :=
    channel_config_recursive D_0 j_0 (s := s) hrelRec
  have hstepRec : ChannelInternalStep s
    {s with control := .value (.recClosure self z M s.env)} := by
  have happ :
    ChannelInternalStep
    {s with control := .term (.recLam self z M)}
    {s with
      control := .value (.recClosure self z M s.env)} :=
    ChannelInternalStep.recursive (s := s) (self := self)
    (arg := z) (body := M)
  exact hsRec.symm |> happ
  have hscopedVal : ChannelConfig.WellScoped

```

```

      {s with control := .value (.recClosure self z M s.env)} :=
    ChannelInternalStep.preserve_wellScoped hstepRec hscoped
  have hval :=
    hVal
    (s :=
      {s with control := .value (.recClosure self z M s.env)})
    (arg := .recClosure self z M s.env) rfl hs hscopedVal
    hrelVal
  exact recLam_presentedChannelConfigCompleteness D_0 j_0 realize
    hc hrel hval
| intern left right ihL ihR =>
  have <hnaL, hnaR> := hadmin
  have hscopedL :=
    wellScoped_term_child (child := left) hc hscoped
    (fun z hz => by simp [free, hz])
  have hscopedR :=
    wellScoped_term_child (child := right) hc hscoped
    (fun z hz => by simp [free, hz])
  refine intern_related_presentedChannelConfigCompleteness
    D_0 j_0 realize hc hrel ?_ ?_
  * intro semanticEnv k henv hstack
    exact ihL hnaL (s := {s with control := .term left}) rfl hs
      hscopedL
      <interp (hardwarePrimitive D_0 j_0 realize) left semanticEnv, k,
        ControlRel.term left s.env semanticEnv henv, hstack, rfl>
  * intro semanticEnv k henv hstack
    exact ihR hnaR (s := {s with control := .term right}) rfl hs
      hscopedR
      <interp (hardwarePrimitive D_0 j_0 realize) right semanticEnv, k,
        ControlRel.term right s.env semanticEnv henv, hstack, rfl>
| extern _ _ _ =>
  exact False.elim hadmin
| prob p left right ihL ihR =>
  have <hnaL, hnaR> := hadmin
  have hscopedL :=
    wellScoped_term_child (child := left) hc hscoped
    (fun z hz => by simp [free, hz])
  have hscopedR :=
    wellScoped_term_child (child := right) hc hscoped
    (fun z hz => by simp [free, hz])
  refine prob_related_presentedChannelConfigCompleteness
    D_0 j_0 realize hc hrel ?_ ?_
  * intro semanticEnv k quantum henv hstack
    exact ihL hnaL
    (s := {s with control := .term left, quantum := quantum})
    rfl hs <hscopedL.left, hscopedL.right>
    <interp (hardwarePrimitive D_0 j_0 realize) left semanticEnv, k,
      ControlRel.term left s.env semanticEnv henv, hstack, rfl>
  * intro semanticEnv k quantum henv hstack
    exact ihR hnaR
    (s := {s with control := .term right, quantum := quantum})
    rfl hs <hscopedR.left, hscopedR.right>
    <interp (hardwarePrimitive D_0 j_0 realize) right semanticEnv, k,
      ControlRel.term right s.env semanticEnv henv, hstack, rfl>
| prim prim =>
  cases prim with
| ret value =>
  have hsRet :
    {s with control := .term (.prim (.ret value))} = s :=
    ChannelConfig.ext hc.symm rfl rfl rfl
  have hrelRet : ChannelConfigRel D_0 j_0 realize
    {s with control := .term (.prim (.ret value))} answer :=
    hsRet.symm |> hrel

```

```

have hrelVal :=
  channel_config_return D_0 j_0 hrelRet
have hstepRet : ChannelInternalStep s
  {s with control := .value (.payload value)} := by
  have happ :
    ChannelInternalStep
      {s with control := .term (.prim (.ret value))}
      {s with control := .value (.payload value)} :=
    ChannelInternalStep.returnPrimitive (s := s)
      (value := value)
  exact hsRet.symm |> happ
have hscopedVal : ChannelConfig.WellScoped
  {s with control := .value (.payload value)} :=
  ChannelInternalStep.preserve_wellScoped hstepRet hscoped
have hval :=
  hVal (s := {s with control := .value (.payload value)})
    (arg := .payload value) rfl hs hscopedVal hrelVal
exact return_presentedChannelConfigCompleteness D_0 j_0 realize
  hc hrel hval
| pauliX value =>
  exact
    pauliX_under_funs_then_args_of_value
      D_0 j_0 realize fns args hne hVal hc hs hscoped hrel
| measureZ _ _ =>
  exact False.elim hadmin

/-- Presented completeness for FunAppFrag under a nonempty ordinary
closure spine over leftover argument frames. -/
theorem funAppFrag_under_funs_then_args_of_value
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} {code : Term (QubitPrimitive C)}
  {answer : HSemanticComp D_0 j_0}
  (hfrag : FunAppFrag code)
  (fns : List (Name x Term (QubitPrimitive C) x RuntimeEnv C))
  (args : List (Term (QubitPrimitive C) x RuntimeEnv C))
  (hne : fns != [])
  (hVal : ValueUnderFunsThenArgs D_0 j_0 realize fns args)
  (hc : s.control = .term code)
  (hs : s.stack = mixedStack fns args)
  (hscoped : ChannelConfig.WellScoped s)
  (hrel : ChannelConfigRel D_0 j_0 realize s answer) :
  PresentedChannelConfigCompleteness D_0 j_0 realize s answer := by
have hVal' : ValueUnderFunFrameSpine D_0 j_0 realize (cloFrames fns) args := by
  intro s' arg' answer' hc' hs' hscoped' hrel'
  have hs'' : s'.stack = mixedStack fns args := by
    simp [funFrameStack_cloFrames_append_args] using hs'
  exact hVal hc' hs'' hscoped' hrel'
have hempty : cloFrames fns = [] -> args = [] := by
  intro h
  cases fns with
  | nil => exact False.elim (hne rfl)
  | cons _ _ => cases h
exact funAppFrag_under_fun_frame_spine_of_value D_0 j_0 realize hfrag
  (cloFrames fns) args hempty hVal' hc
  (by simp [funFrameStack_cloFrames_append_args] using hs)
  hscoped hrel

theorem funAppFrag_under_fn_arg_of_value
  {C : Type}

```



```

(D_0 : QDomain.{0})
(j_0 : IsContinuousLatticeProjection D_0.carrier
  (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
(realize : C -> HSemanticValue D_0 j_0)
(frames : List (Term (QubitPrimitive C) x RuntimeEnv C))
{s : ChannelConfig C} {code : Term (QubitPrimitive C)}
{x : Name} {body : Term (QubitPrimitive C)} {cloX : RuntimeEnv C}
(hVal : ValueUnderFnArg D_0 j_0 realize x body cloX frames)
{answer : HSemanticComp D_0 j_0}
(hfrag : FunAppFrag code)
(hc : s.control = .term code)
(hs : s.stack =
  .function (.closure x body cloX) :: argumentStack frames)
(hscoped : ChannelConfig.WellScoped s)
(hrel : ChannelConfigRel D_0 j_0 realize s answer) :
PresentedChannelConfigCompleteness D_0 j_0 realize s answer :=
funAppFrag_under_funs_then_args_of_value D_0 j_0 realize hfrag
[(x, body, cloX)] frames (List.cons_ne_nil _ _)
(valueUnderFunsThenArgs_of_fnArg D_0 j_0 realize frames hVal)
hc (by simp [mixedStack] using hs) hscoped hrel

/-- Value completeness under ordinary closures over a recursive
closure over leftover argument frames. -/
def ValueUnderFunsThenRecArg {C : Type}
(D_0 : QDomain.{0})
(j_0 : IsContinuousLatticeProjection D_0.carrier
  (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
(realize : C -> HSemanticValue D_0 j_0)
(fns : List (Name x Term (QubitPrimitive C) x RuntimeEnv C))
(self x : Name) (body : Term (QubitPrimitive C))
(cloEnv : RuntimeEnv C)
(args : List (Term (QubitPrimitive C) x RuntimeEnv C)) :
Prop :=
forall {s : ChannelConfig C} {arg : RuntimeValue C}
{answer : HSemanticComp D_0 j_0},
s.control = .value arg ->
s.stack =
  functionStack fns ++
    (.function (.recClosure self x body cloEnv) ::
      argumentStack args) ->
ChannelConfig.WellScoped s ->
ChannelConfigRel D_0 j_0 realize s answer ->
PresentedChannelConfigCompleteness D_0 j_0 realize s answer

theorem valueUnderFunsThenRecArg_nil_of_recArg
{C : Type}
(D_0 : QDomain.{0})
(j_0 : IsContinuousLatticeProjection D_0.carrier
  (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
(realize : C -> HSemanticValue D_0 j_0)
{self x : Name} {body : Term (QubitPrimitive C)}
{cloX : RuntimeEnv C}
(frames : List (Term (QubitPrimitive C) x RuntimeEnv C))
(hVal : ValueUnderRecArg D_0 j_0 realize self x body cloX frames) :
ValueUnderFunsThenRecArg D_0 j_0 realize [] self x body cloX
frames := by
intro s arg answer hc hs hscoped hrel
have hs' : s.stack =
  .function (.recClosure self x body cloX) ::
    argumentStack frames := by
  simp [functionStack] using hs
exact hVal hc hs' hscoped hrel

```

```

theorem pauliX_under_funs_then_rec_arg_of_value
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (fns : List (Name x Term (QubitPrimitive C) x RuntimeEnv C))
  (self x : Name) (body : Term (QubitPrimitive C))
  (cloEnv : RuntimeEnv C)
  (args : List (Term (QubitPrimitive C) x RuntimeEnv C))
  (hVal : ValueUnderFunsThenRecArg D_0 j_0 realize fns self x body
    cloEnv args)
  {s : ChannelConfig C} {value : C} {answer : HSemanticComp D_0 j_0}
  (hc : s.control = .term (.prim (.pauliX value)))
  (hs : s.stack =
    functionStack fns ++
    (.function (.recClosure self x body cloEnv) ::
      argumentStack args))
  (hscoped : ChannelConfig.WellScoped s)
  (hrel : ChannelConfigRel D_0 j_0 realize s answer) :
  PresentedChannelConfigCompleteness D_0 j_0 realize s answer := by
have hsPx :
  {s with control := .term (.prim (.pauliX value))} = s :=
  ChannelConfig.ext hc.symm rfl rfl rfl
obtain <semanticEnv, kStack, henv, hstack, rfl> :=
  channelConfigRel_term_inv D_0 j_0 hc hrel
let sVal : ChannelConfig C :=
  {s with
    control := .value (.payload value)
    quantum := applyOperation Qubit.pauliXOp s.quantum}
have hstep : ChannelInternalStep s sVal := by
have happ :
  ChannelInternalStep
    {s with control := .term (.prim (.pauliX value))}
    sVal :=
  ChannelInternalStep.pauliXPrimitive (s := s) (value := value)
exact hsPx.symm |> happ
have hscopedVal : ChannelConfig.WellScoped sVal :=
  ChannelInternalStep.preserve_wellScoped hstep hscoped
have hrelVal : ChannelConfigRel D_0 j_0 realize sVal
  (kStack
    (semanticUnit (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0) (realize value))) :=
  <semanticUnit (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0) (realize value),
    kStack,
    ControlRel.value _ _ s.env
    (payload_related D_0 j_0 realize value),
    hstack, rfl>
have hval :=
  hVal (s := sVal) (arg := .payload value) rfl hs hscopedVal
  hrelVal
refine
  { related := hrel
    complete := ?_ }
constructor
intro selectors i ? k? hk
have hchildEq :=
  hval.complete.selected_result_eq_channelTree_sup_presented
  selectors i ? k? hk
have hden :
  interp (hardwarePrimitive D_0 j_0 realize)
    (.prim (.pauliX value)) semanticEnv =

```

```

    taggedEmbed
      (FiniteInstrumentComp.ofOperation Qubit.pauliXOp
        (realize value)) := by
    simp [hardwarePrimitive_pauliX]
  have hneStack : s.stack != [] := by
    rw [hs]
    cases fns with
    | nil => exact List.cons_ne_nil _ _
    | cons _ _ => exact List.cons_ne_nil _ _
  let unitVal : HSemanticComp D_0 j_0 :=
    semanticUnit (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0) (realize value)
  let opVal : HSemanticComp D_0 j_0 :=
    taggedEmbed
      (FiniteInstrumentComp.ofOperation Qubit.pauliXOp
        (realize value))
  have hchildCoord :
    kStack unitVal (HardwareAdequacy.encodePath selectors i) k? =
      sSup (channelTreeResults D_0 j_0 realize sVal selectors i
        k?) := by
  have hsel :
    HardwareAdequacy.selectPath selectors (kStack unitVal) i k? =
      kStack unitVal (HardwareAdequacy.encodePath selectors i)
        k? :=
    congrArg (fun f => f k?)
      (HardwareAdequacy.selectPath_apply_encode selectors
        (kStack unitVal) i)
  exact hsel.symm.trans hchildEq
  have hselParent :
    HardwareAdequacy.selectPath selectors (kStack opVal) i k? =
      kStack opVal (HardwareAdequacy.encodePath selectors i) k? :=
    congrArg (fun f => f k?)
      (HardwareAdequacy.selectPath_apply_encode selectors
        (kStack opVal) i)
  have hop :
    kStack opVal (HardwareAdequacy.encodePath selectors i) k? =
      embed (FiniteInstrumentComp.ofOperation Qubit.pauliXOp
        (realize value))
        (ScottMap.const
          (kStack unitVal (HardwareAdequacy.encodePath selectors i)
            k?)) :=
    stackRel_ofOperation_eval D_0 j_0 hstack hneStack
    Qubit.pauliXOp (realize value)

```

Lean 4 source (lines 2401–2800)

```

    (HardwareAdequacy.encodePath selectors i) k?
  rw [hden, hselParent, hop, hchildCoord, embed_ofOperation_const_sSup]
  apply le_antisymm
  * apply sSup_le
    rintro T <r, <fuel, child, R, hdepth, rfl>, rfl>
    apply le_sSup
    refine <fuel + 1, ChannelTree.internal hstep child,
      wrapInternalRealization D_0 j_0 realize hstep child R, ?_, ?_>
  * change child.depth + 1 <= fuel + 1
    omega
  * exact
    (restrictedResult_internal_pauliX D_0 j_0 realize hstep hc
      child
      (wrapInternalRealization D_0 j_0 realize hstep child R)
      selectors i ? k? hk).symm
  * apply sSup_le
    rintro T <_, tree, R, _, rfl>
    cases tree with

```

```

| terminal hterm =>
  cases hterm.control_eq.symm.trans hc
| @internal _ t' h next =>
  have ht : t' = sVal :=
    ChannelInternalStep.eq_config_of_pauliX h hc
  subst t'
  rw [restrictedResult_internal_pauliX D_0 j_0 realize h hc
    next R selectors i ? k? hk]
  apply le_sSup
  refine <restrictedResult D_0 j_0 realize next
    (internalChildRealization D_0 j_0 realize h next R)
    selectors i k?,
    <next.depth, next,
    internalChildRealization D_0 j_0 realize h next R,
    le_rfl, rfl>, rfl>
| external _ hex _ =>
  exact False.elim (ChannelExternalStep.not_prim hex hc)
| probability _ _ _ =>
  cases hc
| probabilityZero _ =>
  cases hc
| probabilityOne _ =>
  cases hc
| measurement _ _ =>
  cases hc

theorem admin_noapp_under_funs_then_rec_arg_of_value
{C : Type}
(D_0 : QDomain.{0})
(j_0 : IsContinuousLatticeProjection D_0.carrier
  (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
(realize : C -> HSemanticValue D_0 j_0)
(fns : List (Name x Term (QubitPrimitive C) x RuntimeEnv C))
(self x : Name) (body : Term (QubitPrimitive C))
(cloEnv : RuntimeEnv C)
(args : List (Term (QubitPrimitive C) x RuntimeEnv C))
(hVal : ValueUnderFunsThenRecArg D_0 j_0 realize fns self x body
  cloEnv args)
{s : ChannelConfig C} {code : Term (QubitPrimitive C)}
{answer : HSemanticComp D_0 j_0}
(hadmin : AdminNoApp code)
(hc : s.control = .term code)
(hs : s.stack =
  functionStack fns ++
    (.function (.recClosure self x body cloEnv) ::
      argumentStack args))
(hscoped : ChannelConfig.WellScoped s)
(hrel : ChannelConfigRel D_0 j_0 realize s answer) :
PresentedChannelConfigCompleteness D_0 j_0 realize s answer := by
induction code generalizing s answer with
| var z =>
  have hctl := hscoped.left
  rw [hc] at hctl
  obtain <v, hlookup> := hctl.right z (by simp [free])
  have hsVar :
    {s with control := .term (.var z)} = s :=
    ChannelConfig.ext hc.symm rfl rfl rfl
  have hrelVar : ChannelConfigRel D_0 j_0 realize
    {s with control := .term (.var z)} answer :=
    hsVar.symm |> hrel
  have hrelVal :=
    channel_config_variable D_0 j_0 hlookup hrelVar
  have hscopedVal : ChannelConfig.WellScoped

```

```

      {s with control := .value v} :=
      <hctl.left, hctl.left z v hlookup>, hscoped.right>
have hval :=
  hVal (s := {s with control := .value v}) (arg := v)
  rfl hs hscopedVal hrelVal
exact variable_presentedChannelConfigCompleteness D_0 j_0 realize
  hc hlookup hrel hval
| app _ _ =>
  exact False.elim hadmin
| lam z M _ih =>
  have hslam :
    {s with control := .term (.lam z M)} = s :=
    ChannelConfig.ext hc.symm rfl rfl rfl
  have hrelLam : ChannelConfigRel D_0 j_0 realize
    {s with control := .term (.lam z M)} answer :=
    hslam.symm |> hrel
  have hrelVal :=
    channel_config_lambda D_0 j_0 (s := s) hrelLam
  have hstepLam : ChannelInternalStep s
    {s with control := .value (.closure z M s.env)} := by
  have happ :
    ChannelInternalStep
    {s with control := .term (.lam z M)}
    {s with control := .value (.closure z M s.env)} :=
    ChannelInternalStep.lambda (s := s) (x := z) (body := M)
  exact hslam.symm |> happ
  have hscopedVal : ChannelConfig.WellScoped
    {s with control := .value (.closure z M s.env)} :=
    ChannelInternalStep.preserve_wellScoped hstepLam hscoped
  have hval :=
    hVal (s := {s with control := .value (.closure z M s.env)})
    (arg := .closure z M s.env) rfl hs hscopedVal hrelVal
  exact lambda_presentedChannelConfigCompleteness D_0 j_0 realize
    hc hrel hval
| recLam self' z M _ih =>
  have hsRec :
    {s with control := .term (.recLam self' z M)} = s :=
    ChannelConfig.ext hc.symm rfl rfl rfl
  have hrelRec : ChannelConfigRel D_0 j_0 realize
    {s with control := .term (.recLam self' z M)} answer :=
    hsRec.symm |> hrel
  have hrelVal :=
    channel_config_recursive D_0 j_0 (s := s) hrelRec
  have hstepRec : ChannelInternalStep s
    {s with control := .value (.recClosure self' z M s.env)} := by
  have happ :
    ChannelInternalStep
    {s with control := .term (.recLam self' z M)}
    {s with
      control := .value (.recClosure self' z M s.env)} :=
    ChannelInternalStep.recursive (s := s) (self := self')
    (arg := z) (body := M)
  exact hsRec.symm |> happ
  have hscopedVal : ChannelConfig.WellScoped
    {s with control := .value (.recClosure self' z M s.env)} :=
    ChannelInternalStep.preserve_wellScoped hstepRec hscoped
  have hval :=
    hVal
    (s :=
      {s with control := .value (.recClosure self' z M s.env)})
    (arg := .recClosure self' z M s.env) rfl hs hscopedVal
    hrelVal
  exact recLam_presentedChannelConfigCompleteness D_0 j_0 realize

```

```

      hc hrel hval
| intern left right ihL ihR =>
  have <hnaL, hnaR> := hadmin
  have hscopedL :=
    wellScoped_term_child (child := left) hc hscoped
    (fun z hz => by simp [free, hz])
  have hscopedR :=
    wellScoped_term_child (child := right) hc hscoped
    (fun z hz => by simp [free, hz])
  refine intern_related_presentedChannelConfigCompleteness
    D_0 j_0 realize hc hrel ?_ ?_
  * intro semanticEnv k henv hstack
    exact ihL hnaL (s := {s with control := .term left}) rfl hs
      hscopedL
      <interp (hardwarePrimitive D_0 j_0 realize) left semanticEnv, k,
        ControlRel.term left s.env semanticEnv henv, hstack, rfl>
  * intro semanticEnv k henv hstack
    exact ihR hnaR (s := {s with control := .term right}) rfl hs
      hscopedR
      <interp (hardwarePrimitive D_0 j_0 realize) right semanticEnv, k,
        ControlRel.term right s.env semanticEnv henv, hstack, rfl>
| extern _ _ _ =>
  exact False.elim hadmin
| prob p left right ihL ihR =>
  have <hnaL, hnaR> := hadmin
  have hscopedL :=
    wellScoped_term_child (child := left) hc hscoped
    (fun z hz => by simp [free, hz])
  have hscopedR :=
    wellScoped_term_child (child := right) hc hscoped
    (fun z hz => by simp [free, hz])
  refine prob_related_presentedChannelConfigCompleteness
    D_0 j_0 realize hc hrel ?_ ?_
  * intro semanticEnv k quantum henv hstack
    exact ihL hnaL
      (s := {s with control := .term left, quantum := quantum})
      rfl hs <hscopedL.left, hscopedL.right>
      <interp (hardwarePrimitive D_0 j_0 realize) left semanticEnv, k,
        ControlRel.term left s.env semanticEnv henv, hstack, rfl>
  * intro semanticEnv k quantum henv hstack
    exact ihR hnaR
      (s := {s with control := .term right, quantum := quantum})
      rfl hs <hscopedR.left, hscopedR.right>
      <interp (hardwarePrimitive D_0 j_0 realize) right semanticEnv, k,
        ControlRel.term right s.env semanticEnv henv, hstack, rfl>
| prim prim =>
  cases prim with
| ret value =>
  have hsRet :
    {s with control := .term (.prim (.ret value))} = s :=
    ChannelConfig.ext hc.symm rfl rfl rfl
  have hrelRet : ChannelConfigRel D_0 j_0 realize
    {s with control := .term (.prim (.ret value))} answer :=
    hsRet.symm |> hrel
  have hrelVal :=
    channel_config_return D_0 j_0 hrelRet
  have hstepRet : ChannelInternalStep s
    {s with control := .value (.payload value)} := by
  have happ :
    ChannelInternalStep
      {s with control := .term (.prim (.ret value))}
      {s with control := .value (.payload value)} :=
    ChannelInternalStep.returnPrimitive (s := s)

```

```

        (value := value)
    exact hsRet.symm |> happ
    have hscopedVal : ChannelConfig.WellScoped
    {s with control := .value (.payload value)} :=
    ChannelInternalStep.preserve_wellScoped hstepRet hscoped
    have hval :=
    hVal (s := {s with control := .value (.payload value)})
    (arg := .payload value) rfl hs hscopedVal hrelVal
    exact return_presentedChannelConfigCompleteness D_0 j_0 realize
    hc hrel hval
| pauliX value =>
    exact
    pauliX_under_funs_then_rec_arg_of_value
    D_0 j_0 realize fns self x body cloEnv args hVal
    hc hs hscoped hrel
| measureZ _ _ =>
    exact False.elim hadmin

theorem funAppFrag_under_funs_then_rec_arg_of_value
{C : Type}
(D_0 : QDomain.{0})
(j_0 : IsContinuousLatticeProjection D_0.carrier
  (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
(realize : C -> HSemanticValue D_0 j_0)
{s : ChannelConfig C} {code : Term (QubitPrimitive C)}
{answer : HSemanticComp D_0 j_0}
(hfrag : FunAppFrag code)
(fns : List (Name x Term (QubitPrimitive C) x RuntimeEnv C))
(self x : Name) (body : Term (QubitPrimitive C))
(cloEnv : RuntimeEnv C)
(args : List (Term (QubitPrimitive C) x RuntimeEnv C))
(hVal : ValueUnderFunsThenRecArg D_0 j_0 realize fns self x body
  cloEnv args)
(hc : s.control = .term code)
(hs : s.stack =
  functionStack fns ++
  (.function (.recClosure self x body cloEnv) ::
    argumentStack args))
(hscoped : ChannelConfig.WellScoped s)
(hrel : ChannelConfigRel D_0 j_0 realize s answer) :
PresentedChannelConfigCompleteness D_0 j_0 realize s answer := by
have hVal' : ValueUnderFunFrameSpine D_0 j_0 realize
  (cloFrames fns ++ [.recClo self x body cloEnv]) args := by
intro s' arg' answer' hc' hs' hscoped' hrel'
have hs'' : s'.stack =
  functionStack fns ++
  (.function (.recClosure self x body cloEnv) ::
    argumentStack args) := by
  simpa [funFrameStack_cloFrames_recClo_append_args] using hs'
exact hVal hc' hs'' hscoped' hrel'
exact funAppFrag_under_fun_frame_spine_of_value D_0 j_0 realize hfrag
(cloFrames fns ++ [.recClo self x body cloEnv]) args
(fun h => by
  have : False := by
    simpa [cloFrames] using h
  exact this.elim)
hVal' hc
(by simpa [funFrameStack_cloFrames_recClo_append_args] using hs)
hscoped hrel

theorem funAppFrag_under_rec_arg_of_value
{C : Type}
(D_0 : QDomain.{0})

```

```

(j_0 : IsContinuousLatticeProjection D_0.carrier
  (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
(realize : C -> HSemanticValue D_0 j_0)
(frames : List (Term (QubitPrimitive C) x RuntimeEnv C))
{s : ChannelConfig C} {code : Term (QubitPrimitive C)}
{self x : Name} {body : Term (QubitPrimitive C)}
{cloX : RuntimeEnv C}
(hVal : ValueUnderRecArg D_0 j_0 realize self x body cloX frames)
{answer : HSemanticComp D_0 j_0}
(hfrag : FunAppFrag code)
(hc : s.control = .term code)
(hs : s.stack =
  .function (.recClosure self x body cloX) :: argumentStack frames)
(hscoped : ChannelConfig.WellScoped s)
(hrel : ChannelConfigRel D_0 j_0 realize s answer) :
PresentedChannelConfigCompleteness D_0 j_0 realize s answer :=
funAppFrag_under_funs_then_rec_arg_of_value D_0 j_0 realize hfrag
[] self x body cloX frames
(valueUnderFunsThenRecArg_nil_of_recArg D_0 j_0 realize frames hVal)
hc (by simp [functionStack] using hs) hscoped hrel

/-- Presented completeness for a `Produces n` term sitting under
exactly `n` leftover FunAppFrag argument frames. -/
theorem produces_under_argument_frames_presentedChannelConfigCompleteness
{C : Type}
(D_0 : QDomain.{0})
(j_0 : IsContinuousLatticeProjection D_0.carrier
  (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
(realize : C -> HSemanticValue D_0 j_0)
{s : ChannelConfig C} {n : Nat} {code : Term (QubitPrimitive C)}
{answer : HSemanticComp D_0 j_0}
(hprod : Produces n code)
(frames : List (Term (QubitPrimitive C) x RuntimeEnv C))
(hlen : frames.length = n)
(hok : FunAppFramesOk frames)
(hc : s.control = .term code)
(hs : s.stack = argumentStack frames)
(hscoped : ChannelConfig.WellScoped s)
(hrel : ChannelConfigRel D_0 j_0 realize s answer) :
PresentedChannelConfigCompleteness D_0 j_0 realize s answer := by
revert frames s answer hlen hok hc hs hscoped hrel
induction hprod with
| frag hfrag =>
  intro (s : ChannelConfig C) (answer : HSemanticComp D_0 j_0)
  (frames : List (Term (QubitPrimitive C) x RuntimeEnv C))
  hlen hok hc hs hscoped hrel
  have hnil : frames = [] := List.eq_nil_of_length_eq_zero hlen
  subst frames
  exact funAppFrag_empty_presentedChannelConfigCompleteness
    D_0 j_0 realize hfrag hc (by simp [argumentStack] using hs)
    hscoped hrel
| @lam n x body hprod ih =>
  intro (s : ChannelConfig C) (answer : HSemanticComp D_0 j_0)
  (frames : List (Term (QubitPrimitive C) x RuntimeEnv C))
  hlen hok hc hs hscoped hrel
  match frames with
  | [] =>
    exact (Nat.succ_ne_zero n hlen.symm).elim
  | (arg, callEnv) :: rest =>
    have hlenRest : rest.length = n := by
      simp using hlen
    have hfragArg : FunAppFrag arg :=
      hok (arg, callEnv) (by simp)

```



```

have hokRest : FunAppFramesOk rest :=
  fun q hq => hok q (by simp [hq])
have hsLam :
  {s with control := .term (.lam x body)} = s :=
  ChannelConfig.ext hc.symm rfl rfl rfl
have hrelLam : ChannelConfigRel D_0 j_0 realize
  {s with control := .term (.lam x body)} answer :=
  hsLam.symm |> hrel
have hrelClo :=
  channel_config_lambda D_0 j_0 (s := s) hrelLam
have hsrcClo :
  {s with control := .value (.closure x body s.env)} =
  {s with
    control := .value (.closure x body s.env)
    stack :=
      .argument arg callEnv :: argumentStack rest} :=
  ChannelConfig.ext rfl rfl hs rfl
have hrelFn :=
  channel_config_evaluateArgument D_0 j_0
  (s := {s with control := .value (.closure x body s.env)})
  (fn := .closure x body s.env) (arg := arg)
  (callEnv := callEnv) (rest := argumentStack rest)
  (hsrcClo |> hrelClo)
have hstepLam : ChannelInternalStep s
  {s with control := .value (.closure x body s.env)} := by
have happ :
  ChannelInternalStep
  {s with control := .term (.lam x body)}
  {s with control := .value (.closure x body s.env)} :=
  ChannelInternalStep.lambda (s := s) (x := x)
  (body := body)
exact hsLam.symm |> happ
have hstepArg : ChannelInternalStep
  {s with control := .value (.closure x body s.env)}
  {s with
    control := .term arg
    env := callEnv
    stack :=
      .function (.closure x body s.env) ::
        argumentStack rest} := by
have happ :
  ChannelInternalStep
  {s with
    control := .value (.closure x body s.env)
    stack :=
      .argument arg callEnv :: argumentStack rest}
  {s with
    control := .term arg
    env := callEnv
    stack :=
      .function (.closure x body s.env) ::
        argumentStack rest} :=
  ChannelInternalStep.evaluateArgument
  (s :=
    {s with control := .value (.closure x body s.env)})
  (fn := .closure x body s.env) (arg := arg)
  (callEnv := callEnv) (rest := argumentStack rest)
exact hsrcClo.symm |> happ
have hscopedFn : ChannelConfig.WellScoped
  {s with
    control := .term arg
    env := callEnv
    stack :=

```

```

        .function (.closure x body s.env) ::
            argumentStack rest} :=
ChannelInternalStep.preserve_wellScoped hstepArg
(ChannelInternalStep.preserve_wellScoped hstepLam

```

Lean 4 source (lines 2801–3099)

```

    hscoped)
have hVal : ValueUnderFnArg D_0 j_0 realize x body s.env
  rest := by
  intro s' v answer' hc' hs' hscoped' hrel'
have hSEq :
  {s' with
    control := .value v
    stack :=
      .function (.closure x body s.env) ::
        argumentStack rest} = s' :=
ChannelConfig.ext hc'.symm rfl hs'.symm rfl
have hrelBody :=
channel_config_beta D_0 j_0 (s := s') (x := x)
  (body := body) (closureEnv := s.env) (arg := v)
  (rest := argumentStack rest) (hSEq.symm |> hrel')
have hstepBeta : ChannelInternalStep s'
  {s' with
    control := .term body
    env := RuntimeEnv.bind x v s.env
    stack := argumentStack rest} := by
have happ :
ChannelInternalStep
  {s' with
    control := .value v
    stack :=
      .function (.closure x body s.env) ::
        argumentStack rest}
  {s' with
    control := .term body
    env := RuntimeEnv.bind x v s.env
    stack := argumentStack rest} :=
ChannelInternalStep.beta (s := s') (x := x)
  (body := body) (closureEnv := s.env) (arg := v)
  (rest := argumentStack rest)
exact hSEq.symm |> happ
have hscopedBody : ChannelConfig.WellScoped
  {s' with
    control := .term body
    env := RuntimeEnv.bind x v s.env
    stack := argumentStack rest} :=
ChannelInternalStep.preserve_wellScoped hstepBeta
  hscoped'
have hchild :=
ih (s :=
  {s' with
    control := .term body
    env := RuntimeEnv.bind x v s.env
    stack := argumentStack rest})
  (answer := answer') rest hlenRest hokRest rfl rfl
  hscopedBody hrelBody
exact beta_presentedChannelConfigCompleteness D_0 j_0
  realize hc' hs' hrel' hchild
have harg :
PresentedChannelConfigCompleteness D_0 j_0 realize
  {s with
    control := .term arg
    env := callEnv

```

```

      stack :=
        .function (.closure x body s.env) ::
          argumentStack rest}
    answer :=
funAppFrag_under_fn_arg_of_value D_0 j_0 realize rest
(s :=
  {s with
    control := .term arg
    env := callEnv
    stack :=
      .function (.closure x body s.env) ::
        argumentStack rest})
  (x := x) (body := body) (cloX := s.env) hVal
  hfragArg rfl rfl hscopedFn hrelFn
have hClo :=
  evaluateArgument_presentedChannelConfigCompleteness
  D_0 j_0 realize
  (s := {s with control := .value (.closure x body s.env)})
  (fn := .closure x body s.env) (arg := arg)
  (callEnv := callEnv) (rest := argumentStack rest)
  rfl hs hrelClo harg
exact lambda_presentedChannelConfigCompleteness D_0 j_0
  realize hc hrel hClo
| @recLam n self x body hprod ih =>
  intro (s : ChannelConfig C) (answer : HSemanticComp D_0 j_0)
  (frames : List (Term (QubitPrimitive C) x RuntimeEnv C))
  hlen hok hc hs hscoped hrel
match frames with
| [] =>
  exact (Nat.succ_ne_zero n hlen.symm).elim
| (arg, callEnv) :: rest =>
  have hlenRest : rest.length = n := by
    simp using hlen
  have hfragArg : FunAppFrag arg :=
    hok (arg, callEnv) (by simp)
  have hokRest : FunAppFramesOk rest :=
    fun q hq => hok q (by simp [hq])
  have hsLam :
    {s with control := .term (.recLam self x body)} = s :=
    ChannelConfig.ext hc.symm rfl rfl rfl
  have hrelLam : ChannelConfigRel D_0 j_0 realize
    {s with control := .term (.recLam self x body)} answer :=
    hsLam.symm |> hrel
  have hrelClo :=
    channel_config_recursive D_0 j_0 (s := s) hrelLam
  have hsrcClo :
    {s with control := .value (.recClosure self x body s.env)} =
    {s with
      control := .value (.recClosure self x body s.env)
      stack :=
        .argument arg callEnv :: argumentStack rest} :=
    ChannelConfig.ext rfl rfl hs rfl
  have hrelFn :=
    channel_config_evaluateArgument D_0 j_0
    (s := {s with control := .value (.recClosure self x body s.env)})
    (fn := .recClosure self x body s.env) (arg := arg)
    (callEnv := callEnv) (rest := argumentStack rest)
    (hsrcClo |> hrelClo)
  have hstepLam : ChannelInternalStep s
    {s with control := .value (.recClosure self x body s.env)} := by
  have happ :
    ChannelInternalStep
    {s with control := .term (.recLam self x body)}

```

```

        {s with control := .value (.recClosure self x body s.env)} :=
ChannelInternalStep.recursive (s := s) (self := self)
    (arg := x) (body := body)
exact hslam.symm |> happ
have hstepArg : ChannelInternalStep
    {s with control := .value (.recClosure self x body s.env)}
    {s with
        control := .term arg
        env := callEnv
        stack :=
            .function (.recClosure self x body s.env) ::
                argumentStack rest} := by
have happ :
    ChannelInternalStep
    {s with
        control := .value (.recClosure self x body s.env)
        stack :=
            .argument arg callEnv :: argumentStack rest}
    {s with
        control := .term arg
        env := callEnv
        stack :=
            .function (.recClosure self x body s.env) ::
                argumentStack rest} :=
ChannelInternalStep.evaluateArgument
    (s :=
        {s with control := .value (.recClosure self x body s.env)})
    (fn := .recClosure self x body s.env) (arg := arg)
    (callEnv := callEnv) (rest := argumentStack rest)
exact hsrcClo.symm |> happ
have hscopedFn : ChannelConfig.WellScoped
    {s with
        control := .term arg
        env := callEnv
        stack :=
            .function (.recClosure self x body s.env) ::
                argumentStack rest} :=
ChannelInternalStep.preserve_wellScoped hstepArg
    (ChannelInternalStep.preserve_wellScoped hstepLam
        hscoped)
have hVal : ValueUnderRecArg D_0 j_0 realize self x body s.env
    rest := by
intro s' v answer' hc' hs' hscoped' hrel'
have hseEq :
    {s' with
        control := .value v
        stack :=
            .function (.recClosure self x body s.env) ::
                argumentStack rest} = s' :=
ChannelConfig.ext hc'.syemm rfl hs'.syemm rfl
have hrelBody :=
    channel_config_recBeta D_0 j_0 (s := s') (self := self) (x := x)
    (body := body) (closureEnv := s.env) (arg := v)
    (rest := argumentStack rest) (hseEq.symm |> hrel')
have hstepBeta : ChannelInternalStep s'
    {s' with
        control := .term body
        env := RuntimeEnv.bind x v (RuntimeEnv.bind self (.recClosure self x body s.
env) s.env)
        stack := argumentStack rest} := by
have happ :
    ChannelInternalStep
    {s' with

```

```

        control := .value v
        stack :=
          .function (.recClosure self x body s.env) ::
            argumentStack rest}
      {s' with
        control := .term body
        env := RuntimeEnv.bind x v (RuntimeEnv.bind self (.recClosure self x body
s.env) s.env)
        stack := argumentStack rest} :=
      ChannelInternalStep.recBeta (s := s') (self := self) (x := x)
        (body := body) (closureEnv := s.env) (arg := v)
        (rest := argumentStack rest)
      exact hxEq.symm |> happ
      have hscopedBody : ChannelConfig.WellScoped
        {s' with
          control := .term body
          env := RuntimeEnv.bind x v (RuntimeEnv.bind self (.recClosure self x body s.
env) s.env)
          stack := argumentStack rest} :=
        ChannelInternalStep.preserve_wellScoped hstepBeta
        hscoped'
      have hchild :=
        ih (s :=
          {s' with
            control := .term body
            env := RuntimeEnv.bind x v (RuntimeEnv.bind self (.recClosure self x body s
.env) s.env)
            stack := argumentStack rest})
          (answer := answer') rest hlenRest hokRest rfl rfl
          hscopedBody hrelBody
          exact recBeta_presentedChannelConfigCompleteness D_0 j_0
          realize hc' hs' hrel' hchild
        have harg :
          PresentedChannelConfigCompleteness D_0 j_0 realize
            {s with
              control := .term arg
              env := callEnv
              stack :=
                .function (.recClosure self x body s.env) ::
                  argumentStack rest}
            answer :=
          funAppFrag_under_rec_arg_of_value D_0 j_0 realize rest
            (s :=
              {s with
                control := .term arg
                env := callEnv
                stack :=
                  .function (.recClosure self x body s.env) ::
                    argumentStack rest})
              (self := self) (x := x) (body := body) (cloX := s.env) hVal
              hfragArg rfl rfl hscopedFn hrelFn
            have hClo :=
              evaluateArgument_presentedChannelConfigCompleteness
                D_0 j_0 realize
                (s := {s with control := .value (.recClosure self x body s.env)})
                (fn := .recClosure self x body s.env) (arg := arg)
                (callEnv := callEnv) (rest := argumentStack rest)
                rfl hs hrelClo harg
              exact recLam_presentedChannelConfigCompleteness D_0 j_0
                realize hc hrel hClo
          | @app n fn arg hfn hfragArg ihFn =>
            intro (s : ChannelConfig C) (answer : HSemanticComp D_0 j_0)
              (frames : List (Term (QubitPrimitive C) x RuntimeEnv C))

```

```

    hlen hok hc hs hscoped hrel
have hsApp :
  {s with control := .term (.app fn arg)} = s :=
  ChannelConfig.ext hc.symm rfl rfl rfl
have hrelApp : ChannelConfigRel D_0 j_0 realize
  {s with control := .term (.app fn arg)} answer :=
  hsApp.symm |> hrel
have hrelFn :=
  channel_config_application D_0 j_0 (s := s) (fn := fn)
  (arg := arg) hrelApp
have hstepApp : ChannelInternalStep s
  {s with
    control := .term fn
    stack := .argument arg s.env :: s.stack} := by
  have happ :
    ChannelInternalStep
    {s with control := .term (.app fn arg)}
    {s with
      control := .term fn
      stack := .argument arg s.env :: s.stack} :=
    ChannelInternalStep.application (s := s) (fn := fn)
    (arg := arg)
  exact hsApp.symm |> happ
have hscopedFn : ChannelConfig.WellScoped
  {s with
    control := .term fn
    stack := .argument arg s.env :: s.stack} :=
  ChannelInternalStep.preserve_wellScoped hstepApp hscoped
have hsFn :
  {s with
    control := .term fn
    stack := .argument arg s.env :: s.stack}.stack =
  argumentStack ((arg, s.env) :: frames) := by
  simp [argumentStack, hs]
have hlenNew :
  ((arg, s.env) :: frames).length = n + 1 := by
  simp [hlen]
have hokNew : FunAppFramesOk ((arg, s.env) :: frames) := by
  intro q hq
  rcases List.mem_cons.mp hq with h | h
  * cases h
    exact hfragArg
  * exact hok q h
have hchild :=
  ihFn
  (s :=
    {s with
      control := .term fn
      stack := .argument arg s.env :: s.stack})
  (answer := answer) ((arg, s.env) :: frames) hlenNew hokNew
  rfl hsFn hscopedFn hrelFn
exact application_presentedChannelConfigCompleteness D_0 j_0
  realize hc hrel hchild

end HardwareChannelSemantics
end QLambda

```

A.22 QLambda/HardwareChannel/Fundamental.lean

1461 lines.

Lean 4 source (lines 1–400)

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/
import QLambda.HardwareChannel.Closed

/-!
# Path-indexed fundamental theorem

Layer of the hardware channel-tree semantics. All layers share the
`QLambda.HardwareChannelSemantics` namespace; import
`QLambda.HardwareChannelSemantics` for the full module.

The path transfer lemmas of `Spines` are assembled here into one
fundamental theorem. The recursion is not a well-founded recursion on
`configMeasure`: the CEK machine of this language is Turing complete, so
no configuration measure decreases at `evaluateArgument` (the frame's
saved environment need not be the current one), at `beta` (freshness of
the popped closure is not an invariant), or at `recBeta` at all. The
induction is therefore on an explicit branch-complete evaluation
derivation `PathChannelEvaluation`, whose constructors are exactly the
situations covered by a path transfer lemma.

Internal choice now has a two-child constructor, matching probability:
both successors are retained, so the unique-successor identity transfer
is not used. A value under a payload function frame remains excluded
(stuck). This file proves that the concrete closed example
`app (prim (ret c)) (prim (ret c'))` has no channel tree, and proves
failure of presented completeness whenever an explicit finitely presented
observation of its denotation is nonbottom. It does not construct a
particular domain and `realize` satisfying that semantic hypothesis, so it
does not claim an unconditional model-specific counterexample.
-/

set_option maxHeartbeats 800000

namespace QLambda
namespace HardwareChannelSemantics

open Matrix
open scoped ComplexOrder MatrixOrder

open HardwareOperational
open HardwareObservation
open HardwareAdequacy
open HardwareLogicalRelation
open TTPhysicalPrimitives
open TTPhysicalEmbedding
open TTContinuation
open Scott1972.ContinuousLattice

/-! ## Small token-theory facts -/

/-- The empty observation theory has no tokens. -/
theorem not_mem_bot_result {n : Nat} {token : TTObservationToken n}
  (h : token in (False : TTResult n)) : False := by
  have hbot : (False : TTResult n) = sSup ({} : Set (TTResult n)) :=
    sSup_empty.symm
  rw [hbot, RoundedTheory.mem_sSup] at h
  obtain <_, <>, _> := h

/-! ## Missing path-indexed transfers -/

```

```

/-- Returning a classical payload is an identity step onto the related
payload value. -/
theorem path_channel_config_return {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  {realize : C -> HSemanticValue D_0 j_0}
  {s : ChannelConfig C} {value : C}
  (hc : s.control = .term (.prim (.ret value)))
  {active : Nat} {observedStack : ObservedStack C}
  {finalK : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)}
  {result : TTResult 2}
  (hrel : PathChannelConfigRel D_0 j_0 realize
    s active observedStack finalK result) :
  PathChannelConfigRel D_0 j_0 realize
    {s with control := .value (.payload value)}
    active observedStack finalK result := by
  rcases hrel with <herase, current, currentK, hcontrol, hstack, hresult>
  rw [hc] at hcontrol
  cases hcontrol with
  | term _ _ semanticEnv henv =>
    refine <herase,
      semanticUnit (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0) (realize value),
      currentK,
      ControlRel.value (.payload value) (realize value) s.env
        (payload_related D_0 j_0 realize value),
      hstack, ?_>
    rw [hresult, interp_prim_apply, hardwarePrimitive_ret]
    rfl

/-- Token adequacy transfers backwards across the `ret` primitive. -/
theorem return_pathChannelTreeTokenAdequacy {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  {realize : C -> HSemanticValue D_0 j_0}
  {s : ChannelConfig C} {value : C}
  (hc : s.control = .term (.prim (.ret value)))
  {active : Nat} {observedStack : ObservedStack C}
  {finalK : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)}
  {result : TTResult 2}
  (hsource : PathChannelConfigRel D_0 j_0 realize
    s active observedStack finalK result)
  (hchild : PathChannelTreeTokenAdequacy D_0 j_0 realize
    {s with control := .value (.payload value)}
    active observedStack finalK result) :
  PathChannelTreeTokenAdequacy D_0 j_0 realize
    s active observedStack finalK result := by
  let t : ChannelConfig C := {s with control := .value (.payload value)}
  have hstep : ChannelInternalStep s t := by
    have happ :
      ChannelInternalStep
        {s with control := .term (.prim (.ret value))} t :=
      ChannelInternalStep.returnPrimitive (s := s) (value := value)
    have hs : s = {s with control := .term (.prim (.ret value))} :=
      ChannelConfig.ext hc rfl rfl rfl
    exact hs.symm |> happ
  exact identity_step_pathChannelTreeTokenAdequacy D_0 j_0 realize
    hstep (by simp [channelInternalOperation, hc])
    (fun h' => ChannelInternalStep.eq_config_of_return h' hc)
  hsource hchild

```



```

/-- A related terminal configuration is token-adequate; its canonical
finite witness is built from the value related by the relation itself. -/
theorem terminal_related_pathChannelTreeTokenAdequacy {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} (hterminal : ChannelTerminal s)
  (hscoped : ChannelConfig.WellScoped s)
  {active : Nat} {observedStack : ObservedStack C}
  {finalK : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)}
  {result : TTResult 2}
  (hrel : PathChannelConfigRel D_0 j_0 realize
    s active observedStack finalK result) :
  PathChannelTreeTokenAdequacy D_0 j_0 realize
    s active observedStack finalK result := by
  have hvalue : exists d, ValueRel D_0 j_0 realize hterminal.value d := by
    rcases hrel with <_, current, currentK, hcontrol, _, _>
    rw [hterminal.control_eq] at hcontrol
    cases hcontrol with
    | value _ d _ hd => exact <d, hd>
  obtain <d, hd> := hvalue
  exact terminal_pathChannelTreeTokenAdequacy D_0 j_0 realize hterminal
    hscoped hrel (terminalValueRealization D_0 j_0 hterminal hd)

/-- At the unresolved root coordinate an external choice observes nothing,
and no finite tree is available there either. -/
theorem extern_root_pathChannelTreeTokenAdequacy {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} {left right : Term (QubitPrimitive C)}
  (hc : s.control = .term (.extern left right))
  {observedStack : ObservedStack C}
  {finalK : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)}
  {result : TTResult 2}
  (hsource : PathChannelConfigRel D_0 j_0 realize
    s 0 observedStack finalK result) :
  PathChannelTreeTokenAdequacy D_0 j_0 realize
    s 0 observedStack finalK result := by
  have hbot : result = False := by
    rcases hsource with <herase, current, currentK, hcontrol, hstack, hresult>
    rw [hc] at hcontrol
    cases hcontrol with
    | term _ _ semanticEnv henv =>
      rw [hresult]
      rw [show
        interp (hardwarePrimitive D_0 j_0 realize) (.extern left right)
          semanticEnv 0 =
          False from by
          rw [interp_extern_apply]
          exact TTContinuation.externalChoice_root_bot _ _]
      exact ScottMap.bot_apply currentK
  refine
  { related := hsource
    token_iff := ?_ }
  intro ? hk token
  constructor
  * intro htoken
    rw [hbot] at htoken
    exact absurd htoken (fun h => not_mem_bot_result h)

```

```

* rintro <tree, R, havail, htoken>
  exfalse
  cases tree with
  | terminal hterminal =>
    have := hterminal.control_eq.symm.trans hc
    cases this
  | internal hstep _ =>
    exact ChannelInternalStep.not_extern hstep hc
  | @external _ t' selector hstep next =>
    have havail' :
      resultAvailableAt (ChannelTree.external selector hstep next) [] := by
        simpa [ResultAvailable, HardwareAdequacy.coordinatePath] using havail
    obtain <rest, hpath, _> := havail'
    exact absurd hpath (by simp)
  | probability _ _ _ =>
    cases hc
  | probabilityZero _ =>
    cases hc
  | probabilityOne _ =>
    cases hc
  | measurement _ _ =>
    cases hc

/-- Interior probabilistic choice at the path level: the two branch
observations exist and the parent observation is their weighted
aggregate. -/
theorem path_channel_config_probability {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  {realize : C -> HSemanticValue D_0 j_0}
  {s : ChannelConfig C} {p : ?}
  {left right : Term (QubitPrimitive C)}
  (hp_0 : 0 < p) (hp_1 : p < 1)
  (hc : s.control = .term (.prob p left right))
  {active : Nat} {observedStack : ObservedStack C}
  {finalK : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)}
  {result : TTResult 2}
  (hrel : PathChannelConfigRel D_0 j_0 realize
    s active observedStack finalK result) :
  exists leftResult rightResult,
    PathChannelConfigRel D_0 j_0 realize
      {s with
        control := .term left
        quantum := applyOperation
          (sourceProbabilityOperation p hp_0.le hp_1.le) s.quantum}
        active observedStack finalK leftResult /\
    PathChannelConfigRel D_0 j_0 realize
      {s with
        control := .term right
        quantum := applyOperation
          (sourceProbabilityOperation (1 - p)
            (sub_nonneg.mpr hp_1.le) (by linarith)) s.quantum}
        active observedStack finalK rightResult /\
    result =
      TTWeightedAggregation.weightedResultScott p hp_0.le hp_1.le
        (leftResult, rightResult) := by
  rcases hrel with <herase, current, currentK, hcontrol, hstack, hresult>
  rw [hc] at hcontrol
  cases hcontrol with
  | term _ _ semanticEnv henv =>
    refine
      <interp (hardwarePrimitive D_0 j_0 realize) left semanticEnv active

```

```

    currentK,
    interp (hardwarePrimitive D_0 j_0 realize) right semanticEnv active
    currentK,
    <herase,
    interp (hardwarePrimitive D_0 j_0 realize) left semanticEnv,
    currentK, ControlRel.term left s.env semanticEnv henv,
    hstack, rfl>,
    <herase,
    interp (hardwarePrimitive D_0 j_0 realize) right semanticEnv,
    currentK, ControlRel.term right s.env semanticEnv henv,
    hstack, rfl>, ?_>
have hsel :=
  selectPath_prob D_0 j_0 realize p left right semanticEnv [] active
  currentK
simp only [HardwareAdequacy.selectPath_nil] at hsel
rw [hresult, hsel, TTContinuation.probChoice_apply,
    dif_pos (<hp_0.le, hp_1.le> : 0 <= p /\ p <= 1)]

/-- Computational-basis measurement at the path level: the two payload
branches are related and the parent observation is their measurement
aggregate. Distinctness of the realized payloads is what lets the two
branch instruments be interpolated independently. -/
theorem path_channel_config_measureZ {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  {realize : C -> HSemanticValue D_0 j_0}
  {s : ChannelConfig C} {zeroValue oneValue : C}
  (hc : s.control = .term (.prim (.measureZ zeroValue oneValue)))
  (hne : realize zeroValue != realize oneValue)
  {active : Nat} {observedStack : ObservedStack C}
  {finalK : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)}
  {result : TTResult 2}
  (hrel : PathChannelConfigRel D_0 j_0 realize
    s active observedStack finalK result) :
exists zeroResult oneResult,
  PathChannelConfigRel D_0 j_0 realize
    {s with
      control := .value (.payload zeroValue)
      quantum := applyOperation (measurementOperation false) s.quantum}
    active observedStack finalK zeroResult /\
  PathChannelConfigRel D_0 j_0 realize
    {s with
      control := .value (.payload oneValue)
      quantum := applyOperation (measurementOperation true) s.quantum}
    active observedStack finalK oneResult /\
  result = measurementResult zeroResult oneResult := by
rcases hrel with <herase, current, currentK, hcontrol, hstack, hresult>
rw [hc] at hcontrol
cases hcontrol with
| term _ _ semanticEnv henv =>
  refine <currentK (realize zeroValue), currentK (realize oneValue),
    <herase,
    semanticUnit (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0) (realize zeroValue),
    currentK,
    ControlRel.value (.payload zeroValue) (realize zeroValue) s.env
    (payload_related D_0 j_0 realize zeroValue),
    hstack, rfl>,
    <herase,
    semanticUnit (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0) (realize oneValue),
    currentK,

```

```

      ControlRel.value (.payload oneValue) (realize oneValue) s.env
      (payload_related D_0 j_0 realize oneValue),
      hstack, rfl>, ?_>
rw [hresult, interp_prim_apply, hardwarePrimitive_measureZ,
    taggedEmbed_apply]
have h :=
  embed_measureZ_map_eq_measurementResult_of_ne
    (fun b : Bool => if b then realize oneValue else realize zeroValue)
    (by simp using hne) currentK
simp using h

/-- Internal choice at the path level: both children are related at the
same coordinate and the parent observation is their join. -/
theorem path_channel_config_intern {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  {realize : C -> HSemanticValue D_0 j_0}
  {s : ChannelConfig C} {left right : Term (QubitPrimitive C)}
  (hc : s.control = .term (.intern left right))
  {active : Nat} {observedStack : ObservedStack C}
  {finalK : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)}
  {result : TTResult 2}
  (hrel : PathChannelConfigRel D_0 j_0 realize
    s active observedStack finalK result) :
exists leftResult rightResult,
  PathChannelConfigRel D_0 j_0 realize
    {s with control := .term left}
    active observedStack finalK leftResult /\
  PathChannelConfigRel D_0 j_0 realize
    {s with control := .term right}
    active observedStack finalK rightResult /\
  result = leftResult sqsup rightResult := by
rcases hrel with <herase, current, currentK, hcontrol, hstack, hresult>
rw [hc] at hcontrol
cases hcontrol with
| term _ _ semanticEnv henv =>
  refine
    <interp (hardwarePrimitive D_0 j_0 realize) left semanticEnv active
      currentK,
      interp (hardwarePrimitive D_0 j_0 realize) right semanticEnv active
      currentK,
      <herase,
        interp (hardwarePrimitive D_0 j_0 realize) left semanticEnv,
        currentK, ControlRel.term left s.env semanticEnv henv,
        hstack, rfl>,
      <herase,
        interp (hardwarePrimitive D_0 j_0 realize) right semanticEnv,
        currentK, ControlRel.term right s.env semanticEnv henv,
        hstack, rfl>, ?_>
  rw [hresult, interp_intern_apply,
      TTContinuation.computation_intern_apply,
      TTContinuation.internalChoice_apply]

/-! ## Steps recovered from a control equation -/
theorem channelInternalStep_of_application {C : Type} {s : ChannelConfig C}
  {fn arg : Term (QubitPrimitive C)}
  (hc : s.control = .term (.app fn arg)) :
ChannelInternalStep s
  {s with
    control := .term fn
    stack := .argument arg s.env :: s.stack} := by

```

```

have hstep :=
  ChannelInternalStep.application (s := s) (fn := fn) (arg := arg)
have hs : s = {s with control := .term (.app fn arg)} :=
  ChannelConfig.ext hc rfl rfl rfl
exact hs.symm |> hstep

theorem channelInternalStep_of_lambda {C : Type} {s : ChannelConfig C}
  {x : Name} {body : Term (QubitPrimitive C)}
  (hc : s.control = .term (.lam x body)) :
  ChannelInternalStep s
    {s with control := .value (.closure x body s.env)} := by
have hstep := ChannelInternalStep.lambda (s := s) (x := x) (body := body)
have hs : s = {s with control := .term (.lam x body)} :=
  ChannelConfig.ext hc rfl rfl rfl
exact hs.symm |> hstep

theorem channelInternalStep_of_recursive {C : Type} {s : ChannelConfig C}
  {self x : Name} {body : Term (QubitPrimitive C)}
  (hc : s.control = .term (.recLam self x body)) :
  ChannelInternalStep s
    {s with control := .value (.recClosure self x body s.env)} := by
have hstep :=

```

Lean 4 source (lines 401–800)

```

  ChannelInternalStep.recursive (s := s) (self := self) (arg := x)
    (body := body)
have hs : s = {s with control := .term (.recLam self x body)} :=
  ChannelConfig.ext hc rfl rfl rfl
exact hs.symm |> hstep

theorem channelInternalStep_of_variable {C : Type} {s : ChannelConfig C}
  {x : Name} {v : RuntimeValue C}
  (hc : s.control = .term (.var x))
  (hlookup : RuntimeEnv.lookup x s.env = some v) :
  ChannelInternalStep s {s with control := .value v} := by
have hstep :=
  ChannelInternalStep.variable (s := s) (x := x) (v := v) hlookup
have hs : s = {s with control := .term (.var x)} :=
  ChannelConfig.ext hc rfl rfl rfl
exact hs.symm |> hstep

theorem channelInternalStep_of_return {C : Type} {s : ChannelConfig C}
  {value : C} (hc : s.control = .term (.prim (.ret value))) :
  ChannelInternalStep s {s with control := .value (.payload value)} := by
have hstep :=
  ChannelInternalStep.returnPrimitive (s := s) (value := value)
have hs : s = {s with control := .term (.prim (.ret value))} :=
  ChannelConfig.ext hc rfl rfl rfl
exact hs.symm |> hstep

theorem channelInternalStep_of_evaluateArgument {C : Type}
  {s : ChannelConfig C} {fn : RuntimeValue C}
  {arg : Term (QubitPrimitive C)} {callEnv : RuntimeEnv C}
  {rest : EvalStack C}
  (hc : s.control = .value fn)
  (hs : s.stack = .argument arg callEnv :: rest) :
  ChannelInternalStep s
    {s with
      control := .term arg
      env := callEnv
      stack := .function fn :: rest} := by
have hstep :=
  ChannelInternalStep.evaluateArgument (s := s) (fn := fn) (arg := arg)

```

```

      (callEnv := callEnv) (rest := rest)
have hsrc :
  s = {s with
    control := .value fn
    stack := .argument arg callEnv :: rest} :=
  ChannelConfig.ext hc rfl hs rfl
exact hsrc.symm |> hstep

theorem channelInternalStep_of_beta {C : Type} {s : ChannelConfig C}
  {x : Name} {body : Term (QubitPrimitive C)} {closureEnv : RuntimeEnv C}
  {arg : RuntimeValue C} {rest : EvalStack C}
  (hc : s.control = .value arg)
  (hs : s.stack = .function (.closure x body closureEnv) :: rest) :
  ChannelInternalStep s
    {s with
      control := .term body
      env := RuntimeEnv.bind x arg closureEnv
      stack := rest} := by
have hstep :=
  ChannelInternalStep.beta (s := s) (x := x) (body := body)
    (closureEnv := closureEnv) (arg := arg) (rest := rest)
have hsrc :
  s = {s with
    control := .value arg
    stack := .function (.closure x body closureEnv) :: rest} :=
  ChannelConfig.ext hc rfl hs rfl
exact hsrc.symm |> hstep

theorem channelInternalStep_of_recBeta {C : Type} {s : ChannelConfig C}
  {self x : Name} {body : Term (QubitPrimitive C)}
  {closureEnv : RuntimeEnv C} {arg : RuntimeValue C} {rest : EvalStack C}
  (hc : s.control = .value arg)
  (hs : s.stack =
    .function (.recClosure self x body closureEnv) :: rest) :
  ChannelInternalStep s
    {s with
      control := .term body
      env :=
        RuntimeEnv.bind x arg
        (RuntimeEnv.bind self
          (.recClosure self x body closureEnv) closureEnv)
      stack := rest} := by
have hstep :=
  ChannelInternalStep.recBeta (s := s) (self := self) (x := x)
    (body := body) (closureEnv := closureEnv) (arg := arg) (rest := rest)
have hsrc :
  s = {s with
    control := .value arg
    stack := .function (.recClosure self x body closureEnv) :: rest} :=
  ChannelConfig.ext hc rfl hs rfl
exact hsrc.symm |> hstep

/-! ## Well-scopedness of branch children -/

theorem wellScoped_congr_quantum {C : Type} {s : ChannelConfig C}
  (quantum : SubNormalizedDensity 2)
  (h : ChannelConfig.WellScoped s) :
  ChannelConfig.WellScoped {s with quantum := quantum} :=
  h

theorem wellScoped_prob_left {C : Type} {s : ChannelConfig C} {p : ?}
  {left right : Term (QubitPrimitive C)}
  (hc : s.control = .term (.prob p left right))

```

```

(hscoped : ChannelConfig.WellScoped s)
(quantum : SubNormalizedDensity 2) :
ChannelConfig.WellScoped
  {s with control := .term left, quantum := quantum} :=
wellScoped_congr_quantum quantum
  (wellScoped_term_child hc hscoped (fun x hx => by simp [free, hx]))

theorem wellScoped_prob_right {C : Type} {s : ChannelConfig C} {p : ?}
  {left right : Term (QubitPrimitive C)}
  (hc : s.control = .term (.prob p left right))
  (hscoped : ChannelConfig.WellScoped s)
  (quantum : SubNormalizedDensity 2) :
ChannelConfig.WellScoped
  {s with control := .term right, quantum := quantum} :=
wellScoped_congr_quantum quantum
  (wellScoped_term_child hc hscoped (fun x hx => by simp [free, hx]))

theorem wellScoped_payload_child {C : Type} {s : ChannelConfig C}
  {code : Term (QubitPrimitive C)}
  (hc : s.control = .term code)
  (hscoped : ChannelConfig.WellScoped s)
  (value : C) (quantum : SubNormalizedDensity 2) :
ChannelConfig.WellScoped
  {s with control := .value (.payload value), quantum := quantum} := by
rcases hscoped with <hctl, hstack>
rw [hc] at hctl
exact <<hctl.left, .payload value>, hstack>

theorem wellScoped_intern_left {C : Type} {s : ChannelConfig C}
  {left right : Term (QubitPrimitive C)}
  (hc : s.control = .term (.intern left right))
  (hscoped : ChannelConfig.WellScoped s) :
ChannelConfig.WellScoped {s with control := .term left} :=
wellScoped_term_child hc hscoped (fun x hx => by simp [free, hx])

theorem wellScoped_intern_right {C : Type} {s : ChannelConfig C}
  {left right : Term (QubitPrimitive C)}
  (hc : s.control = .term (.intern left right))
  (hscoped : ChannelConfig.WellScoped s) :
ChannelConfig.WellScoped {s with control := .term right} :=
wellScoped_term_child hc hscoped (fun x hx => by simp [free, hx])

theorem channelExternalStep_of_extern {C : Type} {s : ChannelConfig C}
  {left right : Term (QubitPrimitive C)} {selected : Bool}
  (hc : s.control = .term (.extern left right)) :
ChannelExternalStep s selected
  {s with control := .term (if selected then right else left)} := by
have hsrc : s = {s with control := .term (.extern left right)} :=
ChannelConfig.ext hc rfl rfl rfl
cases selected with
| false =>
  exact hsrc.symm |>
  ChannelExternalStep.selectFalse (s := s) (left := left)
  (right := right)
| true =>
  exact hsrc.symm |>
  ChannelExternalStep.selectTrue (s := s) (left := left)
  (right := right)

theorem branchCoordinate_succ (i : Nat) :
HardwareAdequacy.branchCoordinate (i % 2 != 0) (i / 2) = i + 1 := by
unfold HardwareAdequacy.branchCoordinate
split_ifs with hsel

```

```

* have : i % 2 = 1 := by
  have hmod := Nat.mod_two_eq_zero_or_one i
  rcases hmod with h0 | h1
  * simp [h0] at hsel
  * exact h1
omega
* have : i % 2 = 0 := by
  have hmod := Nat.mod_two_eq_zero_or_one i
  rcases hmod with h0 | h1
  * exact h0
  * simp [h1] at hsel
omega

/-- Token adequacy of internal choice is the join of the two identity-wrapped
children. Both successors are retained, matching the denotation. -/
theorem intern_step_pathChannelTreeTokenAdequacy {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} {left right : Term (QubitPrimitive C)}
  (hc : s.control = .term (.intern left right))
  {active : Nat} {observedStack : ObservedStack C}
  {finalK : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)}
  {leftResult rightResult result : TTResult 2}
  (hsource : PathChannelConfigRel D_0 j_0 realize
    s active observedStack finalK result)
  (hleft : PathChannelTreeTokenAdequacy D_0 j_0 realize
    {s with control := .term left}
    active observedStack finalK leftResult)
  (hright : PathChannelTreeTokenAdequacy D_0 j_0 realize
    {s with control := .term right}
    active observedStack finalK rightResult)
  (hresult : result = leftResult sqsup rightResult) :
  PathChannelTreeTokenAdequacy D_0 j_0 realize
    s active observedStack finalK result := by
  refine
    { related := hsource
      token_iff := ?_ }
  intro ? hk token
  rw [hresult, Adequacy.mem_sup_iff]
  have hop :
    channelInternalOperation
      {s with control := .term (.intern left right)} =
      QuantumOperation.identity 2 :=
  rfl
  constructor
  * intro htoken
  rcases s with <control, env, stack, quantum>
  simp only at hc
  subst control
  rcases htoken with hL | hR
  * obtain <tree, R, havail, hholds> :=
    (hleft.token_iff ? hk token).mp hL
  let hstep :=
    ChannelInternalStep.internalLeft
      (s := <.term (.intern left right), env, stack, quantum>)
      (left := left) (right := right)
  let sourceTree := ChannelTree.internal hstep tree
  let sourceR :=
    wrapInternalRealization D_0 j_0 realize hstep tree R
  refine <sourceTree, sourceR, havail, ?_>
  apply (token_of_restrictedInstrument D_0 j_0 realize

```



```

    sourceTree sourceR [] active ? finalK (fun o => hk _) token).mp
rw [embed_restricted_internal_of_identity D_0 j_0 realize
  hstep hop tree sourceR [] active]
exact
  (token_of_restrictedInstrument D_0 j_0 realize
    tree
      (internalChildRealization D_0 j_0 realize hstep tree sourceR)
      [] active ? finalK (fun o => hk _) token).mpr hholds
* obtain <tree, R, havail, hholds> :=
  (hright.token_iff ? hk token).mp hR
let hstep :=
  ChannelInternalStep.internalRight
    (s := <.term (.intern left right), env, stack, quantum>)
    (left := left) (right := right)
let sourceTree := ChannelTree.internal hstep tree
let sourceR :=
  wrapInternalRealization D_0 j_0 realize hstep tree R
refine <sourceTree, sourceR, havail, ?_>
apply (token_of_restrictedInstrument D_0 j_0 realize
  sourceTree sourceR [] active ? finalK (fun o => hk _) token).mp
rw [embed_restricted_internal_of_identity D_0 j_0 realize
  hstep hop tree sourceR [] active]
exact
  (token_of_restrictedInstrument D_0 j_0 realize
    tree
      (internalChildRealization D_0 j_0 realize hstep tree sourceR)
      [] active ? finalK (fun o => hk _) token).mpr hholds
* rintro <tree, parentR, havail, hholds>
cases tree with
| terminal hterminal =>
  have := hterminal.control_eq.symm.trans hc
  cases this
| @internal _ t hstep next =>
  have hop' : channelInternalOperation s = QuantumOperation.identity 2 := by
    simp [channelInternalOperation, hc]
  rcases ChannelInternalStep.eq_of_intern hstep hc with ht | ht
* subst t
  let childR :=
    internalChildRealization D_0 j_0 realize hstep next parentR
  refine Or.inl ((hleft.token_iff ? hk token).mpr <next, childR, havail, ?_>)
  apply (token_of_restrictedInstrument D_0 j_0 realize
    next childR [] active ? finalK (fun o => hk _) token).mp
  rw [ <- embed_restricted_internal_of_identity D_0 j_0 realize
    hstep hop' next parentR [] active]
  exact
    (token_of_restrictedInstrument D_0 j_0 realize
      (ChannelTree.internal hstep next) parentR [] active ? finalK
        (fun o => hk _) token).mpr hholds
* subst t
  let childR :=
    internalChildRealization D_0 j_0 realize hstep next parentR
  refine Or.inr ((hright.token_iff ? hk token).mpr <next, childR, havail, ?_>)
  apply (token_of_restrictedInstrument D_0 j_0 realize
    next childR [] active ? finalK (fun o => hk _) token).mp
  rw [ <- embed_restricted_internal_of_identity D_0 j_0 realize
    hstep hop' next parentR [] active]
  exact
    (token_of_restrictedInstrument D_0 j_0 realize
      (ChannelTree.internal hstep next) parentR [] active ? finalK
        (fun o => hk _) token).mpr hholds
| external _ hex _ =>
  exact False.elim (ChannelExternalStep.not_intern hex hc)
| probability _ _ _ =>

```

```

      cases hc
    | probabilityZero _ =>
      cases hc
    | probabilityOne _ =>
      cases hc
    | measurement _ _ =>
      cases hc

/-! ## Branch-complete evaluation derivations

Each constructor is one situation for which a path transfer lemma exists,
together with the coordinate and observed-stack bookkeeping that lemma
performs. Values under payload function frames have no constructor
(they are stuck), and `pauliX` has one only at the empty stack (its
physical operation is not aggregated through a pending stack). -/
inductive PathChannelEvaluation {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0) :
  ChannelConfig C -> Nat -> ObservedStack C -> Prop where
| terminal {s : ChannelConfig C} {active : Nat}
  {observed : ObservedStack C}
  (hterminal : ChannelTerminal s) :
  PathChannelEvaluation D_0 j_0 realize s active observed
| application {s : ChannelConfig C} {fn arg : Term (QubitPrimitive C)}
  {active : Nat} {observed : ObservedStack C}
  (hc : s.control = .term (.app fn arg))
  (hnext : PathChannelEvaluation D_0 j_0 realize
    {s with
      control := .term fn
      stack := .argument arg s.env :: s.stack}
    active ((.argument arg s.env, active) :: observed)) :
  PathChannelEvaluation D_0 j_0 realize s active observed
| lambda {s : ChannelConfig C} {x : Name} {body : Term (QubitPrimitive C)}
  {active : Nat} {observed : ObservedStack C}
  (hc : s.control = .term (.lam x body))
  (hnext : PathChannelEvaluation D_0 j_0 realize
    {s with control := .value (.closure x body s.env)}
    active observed) :
  PathChannelEvaluation D_0 j_0 realize s active observed
| recursive {s : ChannelConfig C} {self x : Name}
  {body : Term (QubitPrimitive C)}
  {active : Nat} {observed : ObservedStack C}
  (hc : s.control = .term (.recLam self x body))
  (hnext : PathChannelEvaluation D_0 j_0 realize
    {s with control := .value (.recClosure self x body s.env)}
    active observed) :
  PathChannelEvaluation D_0 j_0 realize s active observed
| varLookup {s : ChannelConfig C} {x : Name} {v : RuntimeValue C}
  {active : Nat} {observed : ObservedStack C}
  (hc : s.control = .term (.var x))
  (hlookup : RuntimeEnv.lookup x s.env = some v)
  (hnext : PathChannelEvaluation D_0 j_0 realize
    {s with control := .value v} active observed) :
  PathChannelEvaluation D_0 j_0 realize s active observed
| returnPayload {s : ChannelConfig C} {value : C}
  {active : Nat} {observed : ObservedStack C}
  (hc : s.control = .term (.prim (.ret value)))
  (hnext : PathChannelEvaluation D_0 j_0 realize
    {s with control := .value (.payload value)} active observed) :
  PathChannelEvaluation D_0 j_0 realize s active observed
| evaluateArgument {s : ChannelConfig C} {fn : RuntimeValue C}

```

```

{arg : Term (QubitPrimitive C)} {callEnv : RuntimeEnv C}
{rest : EvalStack C} {saved : Nat} {observedRest : ObservedStack C}
(hc : s.control = .value fn)
(hs : s.stack = .argument arg callEnv :: rest)
(hnext : PathChannelEvaluation D_0 j_0 realize
  {s with
    control := .term arg
    env := callEnv
    stack := .function fn :: rest}
  saved ((.function fn, saved) :: observedRest)) :
PathChannelEvaluation D_0 j_0 realize s saved
  ((.argument arg callEnv, saved) :: observedRest)
| beta {s : ChannelConfig C} {x : Name}
{body : Term (QubitPrimitive C)} {closureEnv : RuntimeEnv C}
{arg : RuntimeValue C} {rest : EvalStack C} {saved : Nat}
{observedRest : ObservedStack C}
(hc : s.control = .value arg)
(hs : s.stack = .function (.closure x body closureEnv) :: rest)
(hnext : PathChannelEvaluation D_0 j_0 realize
  {s with
    control := .term body
    env := RuntimeEnv.bind x arg closureEnv
    stack := rest}
  saved observedRest) :
PathChannelEvaluation D_0 j_0 realize s saved
  ((.function (.closure x body closureEnv), saved) :: observedRest)
| recBeta {s : ChannelConfig C} {self x : Name}
{body : Term (QubitPrimitive C)} {closureEnv : RuntimeEnv C}
{arg : RuntimeValue C} {rest : EvalStack C} {saved : Nat}
{observedRest : ObservedStack C}
(hc : s.control = .value arg)
(hs : s.stack =
  .function (.recClosure self x body closureEnv) :: rest)
(hnext : PathChannelEvaluation D_0 j_0 realize
  {s with
    control := .term body
    env :=
      RuntimeEnv.bind x arg
      (RuntimeEnv.bind self
        (.recClosure self x body closureEnv) closureEnv)
    stack := rest}
  saved observedRest) :
PathChannelEvaluation D_0 j_0 realize s saved
  ((.function (.recClosure self x body closureEnv), saved) ::
    observedRest)
| pauliX {s : ChannelConfig C} {value : C} {active : Nat}

```

Lean 4 source (lines 801–1200)

```

{observed : ObservedStack C}
(hc : s.control = .term (.prim (.pauliX value)))
(hstack : s.stack = []) :
PathChannelEvaluation D_0 j_0 realize s active observed
| externBranch {s t : ChannelConfig C}
{left right : Term (QubitPrimitive C)} {selected : Bool}
{childActive : Nat} {observed : ObservedStack C}
(hc : s.control = .term (.extern left right))
(hstep : ChannelExternalStep s selected t)
(hnext : PathChannelEvaluation D_0 j_0 realize t childActive observed) :
PathChannelEvaluation D_0 j_0 realize s
  (HardwareAdequacy.branchCoordinate selected childActive) observed
| externRoot {s : ChannelConfig C} {left right : Term (QubitPrimitive C)}
{observed : ObservedStack C}
(hc : s.control = .term (.extern left right)) :

```

```

    PathChannelEvaluation D_0 j_0 realize s 0 observed
| probZero {s : ChannelConfig C} {left right : Term (QubitPrimitive C)}
  {active : Nat} {observed : ObservedStack C}
  (hc : s.control = .term (.prob 0 left right))
  (hnext : PathChannelEvaluation D_0 j_0 realize
    {s with
      control := .term right
      quantum := applyOperation
        (sourceProbabilityOperation 1 zero_le_one (le_refl 1))
      s.quantum}
    active observed) :
  PathChannelEvaluation D_0 j_0 realize s active observed
| probOne {s : ChannelConfig C} {left right : Term (QubitPrimitive C)}
  {active : Nat} {observed : ObservedStack C}
  (hc : s.control = .term (.prob 1 left right))
  (hnext : PathChannelEvaluation D_0 j_0 realize
    {s with
      control := .term left
      quantum := applyOperation
        (sourceProbabilityOperation 1 zero_le_one (le_refl 1))
      s.quantum}
    active observed) :
  PathChannelEvaluation D_0 j_0 realize s active observed
| probability {s : ChannelConfig C} {p : ?}
  {left right : Term (QubitPrimitive C)}
  {active : Nat} {observed : ObservedStack C}
  (hp_0 : 0 < p) (hp_1 : p < 1)
  (hc : s.control = .term (.prob p left right))
  (hleft : PathChannelEvaluation D_0 j_0 realize
    {s with
      control := .term left
      quantum := applyOperation
        (sourceProbabilityOperation p hp_0.le hp_1.le) s.quantum}
    active observed)
  (hright : PathChannelEvaluation D_0 j_0 realize
    {s with
      control := .term right
      quantum := applyOperation
        (sourceProbabilityOperation (1 - p)
          (sub_nonneg.mpr hp_1.le) (by linarith)) s.quantum}
    active observed) :
  PathChannelEvaluation D_0 j_0 realize s active observed
| measurement {s : ChannelConfig C} {zeroValue oneValue : C}
  {active : Nat} {observed : ObservedStack C}
  (hc : s.control = .term (.prim (.measureZ zeroValue oneValue)))
  (hne : realize zeroValue != realize oneValue)
  (hzero : PathChannelEvaluation D_0 j_0 realize
    {s with
      control := .value (.payload zeroValue)
      quantum := applyOperation (measurementOperation false) s.quantum}
    active observed)
  (hone : PathChannelEvaluation D_0 j_0 realize
    {s with
      control := .value (.payload oneValue)
      quantum := applyOperation (measurementOperation true) s.quantum}
    active observed) :
  PathChannelEvaluation D_0 j_0 realize s active observed
| intern {s : ChannelConfig C} {left right : Term (QubitPrimitive C)}
  {active : Nat} {observed : ObservedStack C}
  (hc : s.control = .term (.intern left right))
  (hleft : PathChannelEvaluation D_0 j_0 realize
    {s with control := .term left} active observed)
  (hright : PathChannelEvaluation D_0 j_0 realize

```

```

    {s with control := .term right} active observed) :
    PathChannelEvaluation D_0 j_0 realize s active observed

/-! ## The path-indexed fundamental theorem -/

/-- Every branch-complete evaluation derivation at a related well-scoped
state is token-adequate: at the active coordinate, the observations of the
denotation are exactly those witnessed by finite channel trees. -/
theorem pathChannelEvaluation_pathChannelTreeTokenAdequacy {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} {active : Nat} {observedStack : ObservedStack C}
  (heval : PathChannelEvaluation D_0 j_0 realize s active observedStack) :
  forall (_ : ChannelConfig.WellScoped s)
    (finalK : ScottMap (HSemanticValue D_0 j_0) (TTResult 2))
    (result : TTResult 2),
    PathChannelConfigRel D_0 j_0 realize s active observedStack finalK
    result ->
    PathChannelTreeTokenAdequacy D_0 j_0 realize s active observedStack
    finalK result := by
  induction heval with
  | @terminal s active observed hterminal =>
    intro hscoped finalK result hrel
    exact terminal_related_pathChannelTreeTokenAdequacy D_0 j_0 realize
    hterminal hscoped hrel
  | @application s fn arg active observed hc _ ih =>
    intro hscoped finalK result hrel
    have hEq : {s with control := .term (.app fn arg)} = s :=
      ChannelConfig.ext hc.symm rfl rfl rfl
    have hchild :=
      path_channel_config_application D_0 j_0 (hrel := hEq.symm |> hrel)
    exact application_pathChannelTreeTokenAdequacy D_0 j_0 realize hc hrel
    (ih ((channelInternalStep_of_application hc).preserve_wellScoped
      hscoped) finalK result hchild)
  | @lambda s x body active observed hc _ ih =>
    intro hscoped finalK result hrel
    have hEq : {s with control := .term (.lam x body)} = s :=
      ChannelConfig.ext hc.symm rfl rfl rfl
    have hchild :=
      path_channel_config_lambda D_0 j_0 (hrel := hEq.symm |> hrel)
    exact lambda_pathChannelTreeTokenAdequacy D_0 j_0 realize hc hrel
    (ih ((channelInternalStep_of_lambda hc).preserve_wellScoped hscoped)
      finalK result hchild)
  | @recursive s self x body active observed hc _ ih =>
    intro hscoped finalK result hrel
    have hEq : {s with control := .term (.recLam self x body)} = s :=
      ChannelConfig.ext hc.symm rfl rfl rfl
    have hchild :=
      path_channel_config_recursive D_0 j_0 (hrel := hEq.symm |> hrel)
    exact recursive_pathChannelTreeTokenAdequacy D_0 j_0 realize hc hrel
    (ih ((channelInternalStep_of_recursive hc).preserve_wellScoped
      hscoped) finalK result hchild)
  | @varLookup s x v active observed hc hlookup _ ih =>
    intro hscoped finalK result hrel
    exact variable_pathChannelTreeTokenAdequacy D_0 j_0 realize hc hlookup
    hrel
    (ih ((channelInternalStep_of_variable hc hlookup).preserve_wellScoped
      hscoped) finalK result
      (path_channel_config_variable D_0 j_0 hc hlookup hrel))
  | @returnPayload s value active observed hc _ ih =>
    intro hscoped finalK result hrel

```

```

exact return_pathChannelTreeTokenAdequacy D_0 j_0 realize hc hrel
  (ih ((channelInternalStep_of_return hc).preserve_wellScoped hscoped)
    finalK result (path_channel_config_return D_0 j_0 hc hrel))
| @evaluateArgument s fn arg callEnv rest saved observedRest hc hs _ ih =>
  intro hscoped finalK result hrel
  have hEq :
    {s with
      control := .value fn
      stack := .argument arg callEnv :: rest} = s :=
    ChannelConfig.ext hc.symm rfl hs.symm rfl
  have hchild :=
    path_channel_config_evaluateArgument D_0 j_0
      (hrel := hEq.symm |> hrel)
  exact evaluateArgument_pathChannelTreeTokenAdequacy D_0 j_0 realize hc hs
    hrel
    (ih ((channelInternalStep_of_evaluateArgument hc hs).preserve_wellScoped
      hscoped) finalK result hchild)
| @beta s x body closureEnv arg rest saved observedRest hc hs _ ih =>
  intro hscoped finalK result hrel
  have hEq :
    {s with
      control := .value arg
      stack := .function (.closure x body closureEnv) :: rest} = s :=
    ChannelConfig.ext hc.symm rfl hs.symm rfl
  have hchild :=
    path_channel_config_beta D_0 j_0 (hrel := hEq.symm |> hrel)
  exact beta_pathChannelTreeTokenAdequacy D_0 j_0 realize hc hs hrel
    (ih ((channelInternalStep_of_beta hc hs).preserve_wellScoped hscoped)
      finalK result hchild)
| @recBeta s self x body closureEnv arg rest saved observedRest hc hs _
  ih =>
  intro hscoped finalK result hrel
  have hEq :
    {s with
      control := .value arg
      stack :=
        .function (.recClosure self x body closureEnv) :: rest} = s :=
    ChannelConfig.ext hc.symm rfl hs.symm rfl
  have hchild :=
    path_channel_config_recBeta D_0 j_0 (hrel := hEq.symm |> hrel)
  exact recBeta_pathChannelTreeTokenAdequacy D_0 j_0 realize hc hs hrel
    (ih ((channelInternalStep_of_recBeta hc hs).preserve_wellScoped
      hscoped) finalK result hchild)
| @pauliX s value active observed hc hstack =>
  intro hscoped finalK result hrel
  exact pauliX_pathChannelTreeTokenAdequacy D_0 j_0 realize hc hstack hrel
| @externBranch s t left right selected childActive observed hc hstep _
  ih =>
  intro hscoped finalK result hrel
  have hEq : {s with control := .term (.extern left right)} = s :=
    ChannelConfig.ext hc.symm rfl rfl rfl
  have hchild :
    PathChannelConfigRel D_0 j_0 realize
      {s with control := .term (if selected then right else left)}
      childActive observed finalK result :=
    path_channel_config_externalSelect D_0 j_0 (hrel := hEq.symm |> hrel)
  have ht : t = {s with
    control := .term (if selected then right else left)} :=
    ChannelExternalStep.eq_of_extern hstep hc
  subst ht
  exact external_step_pathChannelTreeTokenAdequacy D_0 j_0 realize hc hstep
    hrel
    (ih (hstep.preserve_wellScoped hscoped) finalK result hchild)

```

```

| @externRoot s left right observed hc =>
  intro hscoped finalK result hrel
  exact extern_root_pathChannelTreeTokenAdequacy D_0 j_0 realize hc hrel
| @probZero s left right active observed hc _ ih =>
  intro hscoped finalK result hrel
  have hEq : {s with control := .term (.prob 0 left right)} = s :=
    ChannelConfig.ext hc.symm rfl rfl rfl
  have hchild :=
    path_channel_config_probabilityZero D_0 j_0 (hrel := hEq.symm |> hrel)
  exact probabilityZero_step_pathChannelTreeTokenAdequacy D_0 j_0 realize hc
    hrel
    (ih (wellScoped_prob_right hc hscoped _) finalK result hchild)
| @probOne s left right active observed hc _ ih =>
  intro hscoped finalK result hrel
  have hEq : {s with control := .term (.prob 1 left right)} = s :=
    ChannelConfig.ext hc.symm rfl rfl rfl
  have hchild :=
    path_channel_config_probabilityOne D_0 j_0 (hrel := hEq.symm |> hrel)
  exact probabilityOne_step_pathChannelTreeTokenAdequacy D_0 j_0 realize hc
    hrel
    (ih (wellScoped_prob_left hc hscoped _) finalK result hchild)
| @probability s p left right active observed hp_0 hp_1 hc _ _ ihL ihR =>
  intro hscoped finalK result hrel
  obtain <leftResult, rightResult, hrelL, hrelR, hres> :=
    path_channel_config_probability D_0 j_0 hp_0 hp_1 hc hrel
  exact probability_step_pathChannelTreeTokenAdequacy D_0 j_0 realize hp_0
    hp_1 hc hrel
    (ihL (wellScoped_prob_left hc hscoped _) finalK leftResult hrelL)
    (ihR (wellScoped_prob_right hc hscoped _) finalK rightResult hrelR)
    hres
| @measurement s zeroValue oneValue active observed hc hne _ _ ihZ ih0 =>
  intro hscoped finalK result hrel
  obtain <zeroResult, oneResult, hrelZ, hrel0, hres> :=
    path_channel_config_measureZ D_0 j_0 hc hne hrel
  exact measurement_step_pathChannelTreeTokenAdequacy D_0 j_0 realize hc
    hscoped hrel
    (ihZ (wellScoped_payload_child hc hscoped zeroValue _) finalK
      zeroResult hrelZ)
    (ih0 (wellScoped_payload_child hc hscoped oneValue _) finalK
      oneResult hrel0)
    hres
| @intern s left right active observed hc _ _ ihL ihR =>
  intro hscoped finalK result hrel
  obtain <leftResult, rightResult, hrelL, hrelR, hres> :=
    path_channel_config_intern D_0 j_0 hc hrel
  exact intern_step_pathChannelTreeTokenAdequacy D_0 j_0 realize hc
    hrel
    (ihL (wellScoped_intern_left hc hscoped) finalK leftResult hrelL)
    (ihR (wellScoped_intern_right hc hscoped) finalK rightResult hrelR)
    hres

/-- Path-indexed fundamental theorem, in applied form. -/
theorem related_pathChannelTreeTokenAdequacy {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEsternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C}
  {active : Nat} {observedStack : ObservedStack C}
  (heval : PathChannelEvaluation D_0 j_0 realize s active observedStack)
  (hscoped : ChannelConfig.WellScoped s)
  {finalK : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)}
  {result : TTResult 2}

```

```

(hrel : PathChannelConfigRel D_0 j_0 realize s active observedStack finalK
  result) :
PathChannelTreeTokenAdequacy D_0 j_0 realize s active observedStack finalK
  result :=
pathChannelEvaluation_pathChannelTreeTokenAdequacy D_0 j_0 realize heval
  hscoped finalK result hrel

/-! ## From token adequacy back to channel-tree completeness -/

/-- Coordinatewise token adequacy at the empty observed stack is exactly
coordinate-presented channel-tree completeness. -/
theorem coordinatePresented_of_pathChannelTreeTokenAdequacy {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} {denotation : HSemanticComp D_0 j_0}
  (hadq : forall (i : Nat) (k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)),
    PathChannelTreeTokenAdequacy D_0 j_0 realize s i [] k
      (denotation i k)) :
CoordinatePresentedChannelTreeCompleteness D_0 j_0 realize s denotation where
coordinate_result_eq_channelTree_sup_presented := by
  classical
  intro i ? k hk
  apply RoundedTheory.ext
  ext token
  have hiff := (hadq i k).token_iff ? hk token
  have hsup :
    token in (sSup (channelTreeResults D_0 j_0 realize s [] i k) :
      TTResult 2) <=>
      exists T in channelTreeResults D_0 j_0 realize s [] i k, token in T :=
    RoundedTheory.mem_sSup _
  constructor
  * intro hmem
    obtain <tree, R, havail, htoken> := hiff.mp hmem
    refine hsup.mpr <restrictedResult D_0 j_0 realize tree R [] i k,
      <tree.depth, tree, R, le_rfl, rfl>, ?_>
    rw [restrictedResult_eq_embed D_0 j_0 realize tree R [] i k havail]
    exact (token_of_restrictedInstrument D_0 j_0 realize tree R [] i ? k
      (fun o => hk _) token).mpr htoken
  * intro hmem
    obtain <T, <fuel, tree, R, hdepth, rfl>, htoken> := hsup.mp hmem
    by_cases havail : ResultAvailable tree [] i
    * refine hiff.mpr <tree, R, havail, ?_>
      rw [restrictedResult_eq_embed D_0 j_0 realize tree R [] i k havail]
      at htoken
      exact (token_of_restrictedInstrument D_0 j_0 realize tree R [] i ? k
        (fun o => hk _) token).mpr htoken
    * rw [restrictedResult_eq_bot D_0 j_0 realize tree R [] i k havail]
      at htoken
      exact absurd htoken (fun h => not_mem_bot_result h)

/-- At an empty CEK stack the classical relation gives the path-indexed
relation at every coordinate and every final continuation. -/
theorem pathChannelConfigRel_of_channelConfigRel_nil {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  {realize : C -> HSemanticValue D_0 j_0}
  {s : ChannelConfig C} (hs : s.stack = [])
  {answer : HSemanticComp D_0 j_0}
  (hrel : ChannelConfigRel D_0 j_0 realize s answer)
  (active : Nat) (k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)) :

```



```

    PathChannelConfigRel D_0 j_0 realize s active [] k (answer active k) := by
rcases hrel with <current, stackK, hcontrol, hstack, rfl>
rw [hs] at hstack
cases hstack
exact <hs.symm, current, k, hcontrol, PathStackRel.nil, rfl>

/-- Bridge from the classical relation to presented channel-tree
completeness at an empty stack, for a state with a branch-complete
evaluation derivation at every coordinate. -/
theorem related_presentedChannelConfigCompleteness {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} (hs : s.stack = [])
  (heval : forall i, PathChannelEvaluation D_0 j_0 realize s i [])
  (hscoped : ChannelConfig.WellScoped s)
  {answer : HSemanticComp D_0 j_0}
  (hrel : ChannelConfigRel D_0 j_0 realize s answer) :
  PresentedChannelConfigCompleteness D_0 j_0 realize s answer where
related := hrel
complete :=
  (coordinatePresented_of_pathChannelTreeTokenAdequacy D_0 j_0 realize
    (fun i k =>
      related_pathChannelTreeTokenAdequacy D_0 j_0 realize (heval i) hscoped
        (pathChannelConfigRel_of_channelConfigRel_nil D_0 j_0 hs hrel
          i k))).toPresented

/-! ## Closed programs -/

/-- Channel-tree completeness for a closed program with a branch-complete
evaluation derivation at every coordinate. No syntactic `NoApp`,
`FunAppFrag` or `Produces` restriction is imposed; the derivation is the
only hypothesis, and it is exactly the operational content that stuck
states and internal choice fail to provide. -/
theorem closed_term_presented_channelTreeCompleteness {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (code : Term (QubitPrimitive C))
  (hclosed : Closed code)
  (quantum : NormalizedDensity 2)
  (semanticEnv : Env (HSemanticValue D_0 j_0))
  (heval : forall i, PathChannelEvaluation D_0 j_0 realize
    (initialChannelConfig code quantum) i []) :
  PresentedChannelTreeCompleteness D_0 j_0 realize
    (initialChannelConfig code quantum)
    (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv) :=
  (related_presentedChannelConfigCompleteness D_0 j_0 realize rfl heval
    (initialChannelConfig_wellScoped hclosed quantum)
    (initialChannelConfig_related D_0 j_0 realize code quantum
      semanticEnv)).complete

/-- Token adequacy for a closed program with a branch-complete evaluation
derivation at every coordinate. -/
theorem closed_term_presented_token_adequacy {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (code : Term (QubitPrimitive C))
  (hclosed : Closed code)

```

```

(quantum : NormalizedDensity 2)
(semanticEnv : Env (HSemanticValue D_0 j_0))
(heval : forall i, PathChannelEvaluation D_0 j_0 realize
  (initialChannelConfig code quantum) i [])
(selectors : List Bool)
(? : HSemanticValue D_0 j_0 -> FiniteInstrumentComp 2 PUnit.{1})
(k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2))

```

Lean 4 source (lines 1201–1461)

```

(hk : forall d, k d = (? d).satisfiedTTTheory resultCode)
(i : Nat) (token : TTObservationToken 2) :
token in HardwareAdequacy.selectPath selectors
  (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv)
  i k <->
exists fuel, exists (tree : ChannelTree C
  (initialChannelConfig code quantum))
  (R : ChannelTreeRealization D_0 j_0 realize tree),
tree.depth <= fuel /\
ResultAvailable tree selectors i /\
TTObservationToken.Holds resultCode token
  ((restrictedInstrument D_0 j_0 realize tree R selectors i).bind
  ?) :=
presented_channel_tree_token_adequacy_iff D_0 j_0 realize
  (initialChannelConfig code quantum)
  (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv)
  (closed_term_presented_channelTreeCompleteness D_0 j_0 realize code hclosed
  quantum semanticEnv heval)
  selectors ? k hk i token

/-! ## Stuck payload frames and the NoApp bridge -/

/-- A value under a payload function frame has no CEK successor: beta and
recBeta require a closure, and every other internal step expects a
different control or stack shape. -/
theorem stuck_payload_under_function_no_internal_step {C : Type}
  {s : ChannelConfig C} {arg : RuntimeValue C} {value : C}
  {rest : EvalStack C}
  (hc : s.control = .value arg)
  (hs : s.stack = .function (.payload value) :: rest) :
  forall {t : ChannelConfig C}, not ChannelInternalStep s t := by
intro t hstep
cases hstep with
| evaluateArgument => cases hs
| beta => cases hs
| recBeta => cases hs
| returnPrimitive => cases hc
| pauliXPrimitive => cases hc
| lambda => cases hc
| recursive => cases hc
| application => cases hc
| internalLeft => cases hc
| internalRight => cases hc
| ?variable? => cases hc

/-- A payload used as a function is not merely unable to take an internal
step: no branch-complete channel tree can start there. Terminality is
excluded by the pending function frame, external stepping by value control,
and all physical branching constructors require term control. -/
theorem stuck_payload_under_function_no_channelTree {C : Type}
  {s : ChannelConfig C} {arg : RuntimeValue C} {value : C}
  {rest : EvalStack C}
  (hc : s.control = .value arg)
  (hs : s.stack = .function (.payload value) :: rest) :

```

```

    ChannelTree C s -> False := by
intro tree
cases tree with
| terminal hterminal =>
    have hne := hs.symm.trans hterminal.stack_eq
    cases hne
| internal hstep _ =>
    exact stuck_payload_under_function_no_internal_step hc hs hstep
| external _ hstep _ =>
    exact ChannelExternalStep.not_value hstep hc
| probability _ _ _ => cases hc
| probabilityZero _ => cases hc
| probabilityOne _ => cases hc
| measurement _ _ => cases hc

/-- The concrete closed program `app (ret f) (ret a)` has no branch-complete
channel tree. Its unique administrative prefix evaluates both returns and
ends with payload `a` under a function frame containing payload `f`. -/
theorem closed_payload_application_no_channelTree {C : Type}
  (functionValue argumentValue : C) (quantum : NormalizedDensity 2) :
  ChannelTree C
    (initialChannelConfig
      (.app (.prim (.ret functionValue)) (.prim (.ret argumentValue)))
      quantum) ->
  False := by
let s_0 : ChannelConfig C :=
  initialChannelConfig
    (.app (.prim (.ret functionValue)) (.prim (.ret argumentValue)))
    quantum
intro tree_0
have hc_0 :
  s_0.control =
    .term
      (.app (.prim (.ret functionValue)) (.prim (.ret argumentValue))) :=
  rfl
cases tree_0 with
| terminal hterminal =>
  have := hterminal.control_eq.symm.trans hc_0
  cases this
| @internal _ s_1 h_0 tree_1 =>
  have hs_1 := ChannelInternalStep.eq_of_application h_0 hc_0
  subst s_1
  have hc_1 :
    ({s_0 with
      control := .term (.prim (.ret functionValue))
      stack :=
        .argument (.prim (.ret argumentValue)) s_0.env :: s_0.stack}).control =
      .term (.prim (.ret functionValue)) :=
    rfl
  cases tree_1 with
  | terminal hterminal =>
    have := hterminal.control_eq.symm.trans hc_1
    cases this
  | @internal _ s_2 h_1 tree_2 =>
    have hs_2 := ChannelInternalStep.eq_config_of_return h_1 hc_1
    subst s_2
    have hc_2 :
      ({s_0 with
        control := .value (.payload functionValue)
        stack :=
          .argument (.prim (.ret argumentValue)) s_0.env ::
            s_0.stack}).control =
        .value (.payload functionValue) :=

```

```

      rfl
    have hstack_2 :
      ({s_0 with
        control := .value (.payload functionValue)
        stack :=
          .argument (.prim (.ret argumentValue)) s_0.env ::
            s_0.stack}).stack =
        .argument (.prim (.ret argumentValue)) s_0.env :: s_0.stack :=
      rfl
    cases tree_2 with
    | terminal hterminal =>
      have hne := hstack_2.symm.trans hterminal.stack_eq
      cases hne
    | @internal _ s_3 h_2 tree_3 =>
      have hs_3 :=
        ChannelInternalStep.eq_of_evaluateArgument h_2 hc_2 hstack_2
      subst s_3
      have hc_3 :
        ({s_0 with
          control := .term (.prim (.ret argumentValue))
          stack := [.function (.payload functionValue)]}).control =
          .term (.prim (.ret argumentValue)) :=
        rfl
      cases tree_3 with
      | terminal hterminal =>
        have := hterminal.control_eq.symm.trans hc_3
        cases this
      | @internal _ s? h_3 tree? =>
        have hs? :=
          ChannelInternalStep.eq_config_of_return h_3 hc_3
        subst s?
        exact stuck_payload_under_function_no_channelTree
          (s :=
            {s_0 with
              control := .value (.payload argumentValue)
              stack := [.function (.payload functionValue)]})
        rfl rfl tree?
      | external _ hstep _ =>
        exact ChannelExternalStep.not_prim hstep hc_3
      | external _ hstep _ =>
        exact ChannelExternalStep.not_value hstep hc_2
      | external _ hstep _ =>
        exact ChannelExternalStep.not_prim hstep hc_1
    | external _ hstep _ =>
      cases hstep

```

/-- Concrete semantic boundary for unrestricted closed-term completeness.

If one finitely presented continuation observes the denotation of the closed stuck program `app (ret f) (ret a)` as nonbottom, then presented channel-tree completeness for that program is contradictory: the preceding theorem shows that its operational channel-tree result set is empty. The nonbottom hypothesis is explicit because constructing a particular recursive domain, projection, realization, and separating finite instrument is intentionally not part of this theorem. -/

theorem

```

closed_payload_application_not_presented_channelTreeComplete_of_nonbottom
{C : Type}
(D_0 : QDomain.{0})
(j_0 : IsContinuousLatticeProjection D_0.carrier
  (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
(realize : C -> HSemanticValue D_0 j_0)
(functionValue argumentValue : C)

```

```

(quantum : NormalizedDensity 2)
(semanticEnv : Env (HSemanticValue D_0 j_0))
(selectors : List Bool) (i : Nat)
(? : HSemanticValue D_0 j_0 -> FiniteInstrumentComp 2 PUnit.{1})
(k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2))
(hk : forall d, k d = (? d).satisfiedTTTheory resultCode)
(hnonbottom :
  HardwareAdequacy.selectPath selectors
    (interp (hardwarePrimitive D_0 j_0 realize)
      (.app (.prim (.ret functionValue)) (.prim (.ret argumentValue)))
      semanticEnv)
    i k !=
    False) :
not PresentedChannelTreeCompleteness D_0 j_0 realize
  (initialChannelConfig
    (.app (.prim (.ret functionValue)) (.prim (.ret argumentValue)))
    quantum)
  (interp (hardwarePrimitive D_0 j_0 realize)
    (.app (.prim (.ret functionValue)) (.prim (.ret argumentValue)))
    semanticEnv) := by
intro hcomplete
apply hnonbottom
rw [hcomplete.selected_result_eq_channelTree_sup_presented
  selectors i ? k hk]
apply le_antisymm
* apply sSup_le
  rintro result <fuel, tree, realization, hdepth, hresult>
  exact False.elim
    (closed_payload_application_no_channelTree functionValue argumentValue
      quantum tree)
* exact bot_le

/-- Application-free closed terms are presented-complete with no
`PathChannelEvaluation` hypothesis: they are already covered by the
empty-stack NoApp induction. -/
theorem closed_term_presented_channelTreeCompleteness_of_noApp {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (code : Term (QubitPrimitive C))
  (hclosed : Closed code) (hnoapp : NoApp code)
  (quantum : NormalizedDensity 2)
  (semanticEnv : Env (HSemanticValue D_0 j_0)) :
PresentedChannelTreeCompleteness D_0 j_0 realize
  (initialChannelConfig code quantum)
  (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv) :=
closed_lambda_choice_presented_channelTreeCompleteness D_0 j_0 realize
  code hclosed hnoapp quantum semanticEnv

/-- Token adequacy for application-free closed terms. -/
theorem closed_term_presented_token_adequacy_of_noApp {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (code : Term (QubitPrimitive C))
  (hclosed : Closed code) (hnoapp : NoApp code)
  (quantum : NormalizedDensity 2)
  (semanticEnv : Env (HSemanticValue D_0 j_0))
  (selectors : List Bool)
  (? : HSemanticValue D_0 j_0 -> FiniteInstrumentComp 2 PUnit.{1})
  (k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2))

```

```

(hk : forall d, k d = (? d).satisfiedTTTheory resultCode)
(i : Nat) (token : TTObservationToken 2) :
token in HardwareAdequacy.selectPath selectors
  (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv)
  i k <->
exists fuel, exists (tree : ChannelTree C
  (initialChannelConfig code quantum))
  (R : ChannelTreeRealization D_0 j_0 realize tree),
tree.depth <= fuel /\
ResultAvailable tree selectors i /\
TTObservationToken.Holds resultCode token
  ((restrictedInstrument D_0 j_0 realize tree R selectors i).bind
  ?) :=
closed_lambda_choice_presented_token_adequacy D_0 j_0 realize
  code hclosed hnoapp quantum semanticEnv selectors ? k hk i token

end HardwareChannelSemantics
end QLambda

```

A.23 QLambda/HardwareChannel/Identity.lean

2823 lines.

Lean 4 source (lines 1–400)

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/
import QLambda.HardwareChannel.Config

/-!
# Identity-step presented completeness transfers

Layer of the hardware channel-tree semantics. All layers share the
`QLambda.HardwareChannelSemantics` namespace; import
`QLambda.HardwareChannelSemantics` for the full module.
-/

set_option maxHeartbeats 800000

namespace QLambda
namespace HardwareChannelSemantics

open Matrix
open scoped ComplexOrder MatrixOrder

open HardwareOperational
open HardwareObservation
open HardwareAdequacy
open HardwareLogicalRelation
open TTPhysicalPrimitives
open TTPhysicalEmbedding
open TTContinuation
open Scott1972.ContinuousLattice

/-- Package an identity-step transfer together with the source logical
relation. The child relation is normally obtained from the corresponding
`channel_config_*` preservation theorem. -/
theorem PresentedChannelConfigCompleteness.ofIdentityStep {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier

```

```

    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s t : ChannelConfig C} {denotation : HSemanticComp D_0 j_0}
  (hsource : ChannelConfigRel D_0 j_0 realize s denotation)
  (hstep : ChannelInternalStep s t)
  (hop : channelInternalOperation s = QuantumOperation.identity 2)
  (hunq : forall {t'}, ChannelInternalStep s t' -> t' = t)
  (hchild : PresentedChannelConfigCompleteness D_0 j_0 realize
    t denotation) :
  PresentedChannelConfigCompleteness D_0 j_0 realize s denotation where
  related := hsource
  complete := identity_step_presentedChannelTreeCompleteness D_0 j_0 realize
    hstep hop hunq hchild.complete

/-- Presented completeness transfers across the application identity step. -/
theorem application_presentedChannelConfigCompleteness {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} {fn arg : Term (QubitPrimitive C)}
  (hc : s.control = .term (.app fn arg))
  {denotation : HSemanticComp D_0 j_0}
  (hsource : ChannelConfigRel D_0 j_0 realize s denotation)
  (hchild : PresentedChannelConfigCompleteness D_0 j_0 realize
    {s with
      control := .term fn
      stack := .argument arg s.env :: s.stack}
    denotation) :
  PresentedChannelConfigCompleteness D_0 j_0 realize s denotation := by
  let t : ChannelConfig C :=
  {s with
    control := .term fn
    stack := .argument arg s.env :: s.stack}
  have hstep : ChannelInternalStep s t := by
  have happ :
    ChannelInternalStep
      {s with control := .term (.app fn arg)} t :=
    ChannelInternalStep.application (s := s) (fn := fn) (arg := arg)
  have hs : s = {s with control := .term (.app fn arg)} :=
    ChannelConfig.ext hc rfl rfl rfl
  exact hs.symm |> happ
  exact PresentedChannelConfigCompleteness.ofIdentityStep D_0 j_0 realize
    hsource hstep (by simp [channelInternalOperation, hc])
    (fun h' => ChannelInternalStep.eq_of_application h' hc) hchild

/-- Presented completeness transfers across argument evaluation. -/
theorem evaluateArgument_presentedChannelConfigCompleteness {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} {fn : RuntimeValue C}
  {arg : Term (QubitPrimitive C)} {callEnv : RuntimeEnv C}
  {rest : EvalStack C}
  (hc : s.control = .value fn)
  (hs : s.stack = .argument arg callEnv :: rest)
  {denotation : HSemanticComp D_0 j_0}
  (hsource : ChannelConfigRel D_0 j_0 realize s denotation)
  (hchild : PresentedChannelConfigCompleteness D_0 j_0 realize
    {s with
      control := .term arg
      env := callEnv

```

```

        stack := .function fn :: rest}
    denotation) :
    PresentedChannelConfigCompleteness D_0 j_0 realize s denotation := by
let t : ChannelConfig C :=
  {s with
    control := .term arg
    env := callEnv
    stack := .function fn :: rest}
have hstep : ChannelInternalStep s t := by
  have happ :
    ChannelInternalStep
      {s with
        control := .value fn
        stack := .argument arg callEnv :: rest} t :=
    ChannelInternalStep.evaluateArgument
      (s := s) (fn := fn) (arg := arg) (callEnv := callEnv)
      (rest := rest)
  have hsrc :
    s = {s with
      control := .value fn
      stack := .argument arg callEnv :: rest} :=
    ChannelConfig.ext hc rfl hs rfl
  exact hsrc.symm |> happ
exact PresentedChannelConfigCompleteness.ofIdentityStep D_0 j_0 realize
  hsource hstep (by simp [channelInternalOperation, hc])
  (fun h' => ChannelInternalStep.eq_of_evaluateArgument h' hc hs) hchild

/-- Presented completeness transfers across closure beta. -/
theorem beta_presentedChannelConfigCompleteness {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} {x : Name}
  {body : Term (QubitPrimitive C)} {closureEnv : RuntimeEnv C}
  {arg : RuntimeValue C} {rest : EvalStack C}
  (hc : s.control = .value arg)
  (hs : s.stack = .function (.closure x body closureEnv) :: rest)
  {denotation : HSemanticComp D_0 j_0}
  (hsource : ChannelConfigRel D_0 j_0 realize s denotation)
  (hchild : PresentedChannelConfigCompleteness D_0 j_0 realize
    {s with
      control := .term body
      env := RuntimeEnv.bind x arg closureEnv
      stack := rest}
    denotation) :
  PresentedChannelConfigCompleteness D_0 j_0 realize s denotation := by
let t : ChannelConfig C :=
  {s with
    control := .term body
    env := RuntimeEnv.bind x arg closureEnv
    stack := rest}
have hstep : ChannelInternalStep s t := by
  have happ :
    ChannelInternalStep
      {s with
        control := .value arg
        stack := .function (.closure x body closureEnv) :: rest} t :=
    ChannelInternalStep.beta (s := s) (x := x) (body := body)
      (closureEnv := closureEnv) (arg := arg) (rest := rest)
  have hsrc :
    s = {s with
      control := .value arg

```



```

      stack := .function (.closure x body closureEnv) :: rest} :=
      ChannelConfig.ext hc rfl hs rfl
    exact hsrc.symm |> happ
  exact PresentedChannelConfigCompleteness.ofIdentityStep D_0 j_0 realize
    hsource hstep (by simp [channelInternalOperation, hc])
    (fun h' => ChannelInternalStep.eq_of_beta h' hc hs) hchild

/-- Presented completeness transfers across recursive-closure beta. -/
theorem recBeta_presentedChannelConfigCompleteness {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} {self x : Name}
  {body : Term (QubitPrimitive C)} {closureEnv : RuntimeEnv C}
  {arg : RuntimeValue C} {rest : EvalStack C}
  (hc : s.control = .value arg)
  (hs : s.stack =
    .function (.recClosure self x body closureEnv) :: rest)
  {denotation : HSemanticComp D_0 j_0}
  (hsource : ChannelConfigRel D_0 j_0 realize s denotation)
  (hchild : PresentedChannelConfigCompleteness D_0 j_0 realize
    {s with
      control := .term body
      env :=
        RuntimeEnv.bind x arg
        (RuntimeEnv.bind self
          (.recClosure self x body closureEnv) closureEnv)
      stack := rest}
    denotation) :
  PresentedChannelConfigCompleteness D_0 j_0 realize s denotation := by
let t : ChannelConfig C :=
  {s with
    control := .term body
    env :=
      RuntimeEnv.bind x arg
      (RuntimeEnv.bind self
        (.recClosure self x body closureEnv) closureEnv)
    stack := rest}
have hstep : ChannelInternalStep s t := by
  have happ :
    ChannelInternalStep
      {s with
        control := .value arg
        stack :=
          .function (.recClosure self x body closureEnv) :: rest} t :=
    ChannelInternalStep.recBeta (s := s) (self := self) (x := x)
      (body := body) (closureEnv := closureEnv) (arg := arg)
      (rest := rest)
  have hsrc :
    s = {s with
      control := .value arg
      stack :=
        .function (.recClosure self x body closureEnv) :: rest} :=
    ChannelConfig.ext hc rfl hs rfl
  exact hsrc.symm |> happ
exact PresentedChannelConfigCompleteness.ofIdentityStep D_0 j_0 realize
  hsource hstep (by simp [channelInternalOperation, hc])
  (fun h' => ChannelInternalStep.eq_of_recBeta h' hc hs) hchild

/-- Presented completeness transfers across ordinary abstraction. -/
theorem lambda_presentedChannelConfigCompleteness {C : Type}
  (D_0 : QDomain.{0})

```

```

(j_0 : IsContinuousLatticeProjection D_0.carrier
  (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
(realize : C -> HSemanticValue D_0 j_0)
{s : ChannelConfig C} {x : Name} {body : Term (QubitPrimitive C)}
(hc : s.control = .term (.lam x body))
{denotation : HSemanticComp D_0 j_0}
(hsource : ChannelConfigRel D_0 j_0 realize s denotation)
(hchild : PresentedChannelConfigCompleteness D_0 j_0 realize
  {s with control := .value (.closure x body s.env)}
  denotation) :
  PresentedChannelConfigCompleteness D_0 j_0 realize s denotation := by
let t : ChannelConfig C :=
  {s with control := .value (.closure x body s.env)}
have hstep : ChannelInternalStep s t := by
  have happ :
    ChannelInternalStep
    {s with control := .term (.lam x body)} t :=
    ChannelInternalStep.lambda (s := s) (x := x) (body := body)
  have hs : s = {s with control := .term (.lam x body)} :=
    ChannelConfig.ext hc rfl rfl rfl
  exact hs.symm |> happ
exact PresentedChannelConfigCompleteness.ofIdentityStep D_0 j_0 realize
  hsource hstep (by simp [channelInternalOperation, hc])
  (fun h' => ChannelInternalStep.eq_of_lambda h' hc) hchild

/-- Presented completeness transfers across recursive abstraction. -/
theorem recLam_presentedChannelConfigCompleteness {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} {self arg : Name}
  {body : Term (QubitPrimitive C)}
  (hc : s.control = .term (.recLam self arg body))
  {denotation : HSemanticComp D_0 j_0}
  (hsource : ChannelConfigRel D_0 j_0 realize s denotation)
  (hchild : PresentedChannelConfigCompleteness D_0 j_0 realize
    {s with control := .value (.recClosure self arg body s.env)}
    denotation) :
    PresentedChannelConfigCompleteness D_0 j_0 realize s denotation := by
let t : ChannelConfig C :=
  {s with control := .value (.recClosure self arg body s.env)}
have hstep : ChannelInternalStep s t := by
  have happ :
    ChannelInternalStep
    {s with control := .term (.recLam self arg body)} t :=
    ChannelInternalStep.recursive (s := s) (self := self) (arg := arg)
    (body := body)
  have hs : s = {s with control := .term (.recLam self arg body)} :=
    ChannelConfig.ext hc rfl rfl rfl
  exact hs.symm |> happ
exact PresentedChannelConfigCompleteness.ofIdentityStep D_0 j_0 realize
  hsource hstep (by simp [channelInternalOperation, hc])
  (fun h' => ChannelInternalStep.eq_of_recursive h' hc) hchild

/-- Presented completeness transfers across variable lookup. -/
theorem variable_presentedChannelConfigCompleteness {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} {x : Name} {v : RuntimeValue C}
  (hc : s.control = .term (.var x))

```

```

(hlookup : RuntimeEnv.lookup x s.env = some v)
{denotation : HSemanticComp D_0 j_0}
(hsource : ChannelConfigRel D_0 j_0 realize s denotation)
(hchild : PresentedChannelConfigCompleteness D_0 j_0 realize
  {s with control := .value v} denotation) :
  PresentedChannelConfigCompleteness D_0 j_0 realize s denotation := by
let t : ChannelConfig C := {s with control := .value v}
have hstep : ChannelInternalStep s t := by
  have happ :
    ChannelInternalStep
      {s with control := .term (.var x)} t :=
    ChannelInternalStep.variable (s := s) (x := x) (v := v) hlookup
  have hs : s = {s with control := .term (.var x)} :=
    ChannelConfig.ext hc rfl rfl rfl
  exact hs.symm |> happ
exact PresentedChannelConfigCompleteness.ofIdentityStep D_0 j_0 realize
  hsource hstep (by simp [channelInternalOperation, hc])
(fun h' => ChannelInternalStep.eq_of_variable h' hc hlookup) hchild

/-- Presented completeness transfers across a hardware return. -/
theorem return_presentedChannelConfigCompleteness {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} {value : C}
  (hc : s.control = .term (.prim (.ret value)))
  {denotation : HSemanticComp D_0 j_0}
  (hsource : ChannelConfigRel D_0 j_0 realize s denotation)
  (hchild : PresentedChannelConfigCompleteness D_0 j_0 realize
    {s with control := .value (.payload value)}
    denotation) :
  PresentedChannelConfigCompleteness D_0 j_0 realize s denotation := by
let t : ChannelConfig C :=
  {s with control := .value (.payload value)}
have hstep : ChannelInternalStep s t := by
  have happ :
    ChannelInternalStep
      {s with control := .term (.prim (.ret value))} t :=
    ChannelInternalStep.returnPrimitive (s := s) (value := value)
  have hs : s = {s with control := .term (.prim (.ret value))} :=
    ChannelConfig.ext hc rfl rfl rfl
  exact hs.symm |> happ
exact PresentedChannelConfigCompleteness.ofIdentityStep D_0 j_0 realize
  hsource hstep (by simp [channelInternalOperation, hc])
(fun h' => ChannelInternalStep.eq_config_of_return h' hc) hchild

/-- Presented stacked fundamental lemma for `app (lam x body) arg`. -/
theorem stacked_lam_app_presentedChannelConfigCompleteness {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} {x : Name}
  {body arg : Term (QubitPrimitive C)}
  (hc : s.control = .term (.app (.lam x body) arg))
  {denotation : HSemanticComp D_0 j_0}
  (hsource : ChannelConfigRel D_0 j_0 realize s denotation)
  (harg : PresentedChannelConfigCompleteness D_0 j_0 realize
    {s with
      control := .term arg
      stack := .function (.closure x body s.env) :: s.stack}
    denotation) :

```

```

PresentedChannelConfigCompleteness D_0 j_0 realize s denotation := by
have hAppEq :
  {s with control := .term (.app (.lam x body) arg)} = s :=
  ChannelConfig.ext hc.symm rfl rfl rfl
have hrelLam :=
  channel_config_application D_0 j_0
  (s := s) (fn := .lam x body) (arg := arg)
  (hrel := hAppEq.symm |> hsource)
have hrelClo :=
  channel_config_lambda D_0 j_0
  (s := {s with stack := .argument arg s.env :: s.stack})
  (hrel := by simpa using hrelLam)
have hClo :=
  evaluateArgument_presentedChannelConfigCompleteness D_0 j_0 realize
  (s := {s with
    control := .value (.closure x body s.env)
    stack := .argument arg s.env :: s.stack})
  (fn := .closure x body s.env) (arg := arg)
  (callEnv := s.env) (rest := s.stack)
  rfl rfl hrelClo harg
have hLam :=
  lambda_presentedChannelConfigCompleteness D_0 j_0 realize
  (s := {s with
    control := .term (.lam x body)
    stack := .argument arg s.env :: s.stack})
  (x := x) (body := body) rfl hrelLam hClo
exact application_presentedChannelConfigCompleteness D_0 j_0 realize
  hc hsource hLam

/-- Presented stacked fundamental lemma for `app (recLam self x body) arg`. -/
theorem stacked_recLam_app_presentedChannelConfigCompleteness {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} {self x : Name}
  {body arg : Term (QubitPrimitive C)}
  (hc : s.control = .term (.app (.recLam self x body) arg))
  {denotation : HSemanticComp D_0 j_0}
  (hsource : ChannelConfigRel D_0 j_0 realize s denotation)
  (harg : PresentedChannelConfigCompleteness D_0 j_0 realize
    {s with
      control := .term arg
      stack :=
        .function (.recClosure self x body s.env) :: s.stack}
    denotation) :
  PresentedChannelConfigCompleteness D_0 j_0 realize s denotation := by

```

Lean 4 source (lines 401–800)

```

have hAppEq :
  {s with control := .term (.app (.recLam self x body) arg)} = s :=
  ChannelConfig.ext hc.symm rfl rfl rfl
have hrelRec :=
  channel_config_application D_0 j_0
  (s := s) (fn := .recLam self x body) (arg := arg)
  (hrel := hAppEq.symm |> hsource)
have hrelClo :=
  channel_config_recursive D_0 j_0
  (s := {s with stack := .argument arg s.env :: s.stack})
  (hrel := by simpa using hrelRec)
have hClo :=
  evaluateArgument_presentedChannelConfigCompleteness D_0 j_0 realize
  (s := {s with

```

```

        control := .value (.recClosure self x body s.env)
        stack := .argument arg s.env :: s.stack})
    (fn := .recClosure self x body s.env) (arg := arg)
    (callEnv := s.env) (rest := s.stack)
    rfl rfl hrelClo harg
have hRec :=
  recLam_presentedChannelConfigCompleteness D_0 j_0 realize
    (s := {s with
      control := .term (.recLam self x body)
      stack := .argument arg s.env :: s.stack})
    (self := self) (arg := x) (body := body) rfl hrelRec hClo
exact application_presentedChannelConfigCompleteness D_0 j_0 realize
  hc hsource hRec

/-- Invert an application tree at a general source configuration. -/
theorem restrictedResult_of_control_application {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C → HSemanticValue D_0 j_0)
  {s : ChannelConfig C}
  (tree : ChannelTree C s)
  (R : ChannelTreeRealization D_0 j_0 realize tree)
  {fn arg : Term (QubitPrimitive C)}
  (hc : s.control = .term (.app fn arg))
  (selectors : List Bool) (i : Nat)
  (k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)) :
  restrictedResult D_0 j_0 realize tree R selectors i k <=
    sSup (channelTreeResults D_0 j_0 realize
      { s with
        control := .term fn
        stack := .argument arg s.env :: s.stack }
        selectors i k) := by
cases tree with
| terminal hterm =>
  have := hterm.control_eq.symm.trans hc
  cases this
| @internal _ t' h' next =>
  have hop : channelInternalOperation s = QuantumOperation.identity 2 := by
    simp [channelInternalOperation, hc]
  have := restrictedResult_internal_of_identity D_0 j_0 realize
    h' hop next R selectors i k
  rw [this]
  have ht : t' =
    { s with
      control := .term fn
      stack := .argument arg s.env :: s.stack } := by
    cases h' <;> cases hc
  rfl
  subst ht
  apply le_sSup
  exact <next.depth, next,
    internalChildRealization D_0 j_0 realize h' next R, le_rfl, rfl>
| external _ hex _ =>
  exact False.elim (by cases hex <;> cases hc)
| probability _ _ _ =>
  cases hc
| probabilityZero _ =>
  cases hc
| probabilityOne _ =>
  cases hc
| measurement _ _ =>
  cases hc

```

```

/-- An identity application step transfers channel-tree completeness from
the function-evaluation frame back to the application control. -/
theorem identity_internal_channelTreeCompleteness {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} {fn arg : Term (QubitPrimitive C)}
  (hc : s.control = .term (.app fn arg))
  {denotation : HSemanticComp D_0 j_0}
  (hcomplete : ChannelTreeCompleteness D_0 j_0 realize
    { s with
      control := .term fn
      stack := .argument arg s.env :: s.stack }
    denotation) :
  ChannelTreeCompleteness D_0 j_0 realize s denotation := by
let t : ChannelConfig C :=
  { s with
    control := .term fn
    stack := .argument arg s.env :: s.stack }
have hstep : ChannelInternalStep s t := by
  have happ :
    ChannelInternalStep
      { s with control := .term (.app fn arg) } t :=
    ChannelInternalStep.application (s := s) (fn := fn) (arg := arg)
  have hs : s = { s with control := .term (.app fn arg) } :=
    ChannelConfig.ext hc rfl rfl rfl
  exact hs.symm |> happ
refine identity_step_channelTreeCompleteness D_0 j_0 realize hstep ?hop
?hunq hcomplete
* simp [channelInternalOperation, hc]
* intro t' h'
  exact ChannelInternalStep.eq_of_application h' hc

noncomputable def wrapApp {C : Type}
  (fn arg : Term (QubitPrimitive C))
  (quantum : NormalizedDensity 2)
  (child : ChannelTree C
    { initialChannelConfig (.app fn arg) quantum with
      control := .term fn
      stack := .argument arg [] :: [] }) :
  ChannelTree C (initialChannelConfig (.app fn arg) quantum) :=
  ChannelTree.internal
    (ChannelInternalStep.application
      (s := initialChannelConfig (.app fn arg) quantum))
  child

/-- Closed application is the identity-step wrapping of function evaluation
under an argument frame. -/
theorem app_channelTreeCompleteness {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (fn arg : Term (QubitPrimitive C))
  (quantum : NormalizedDensity 2)
  (semanticEnv : Env (HSemanticValue D_0 j_0))
  (hfn : ChannelTreeCompleteness D_0 j_0 realize
    { initialChannelConfig (.app fn arg) quantum with
      control := .term fn
      stack := .argument arg [] :: [] })
  (interp (hardwarePrimitive D_0 j_0 realize) (.app fn arg))

```

```

        semanticEnv)) :
ChannelTreeCompleteness D_0 j_0 realize
  (initialChannelConfig (.app fn arg) quantum)
  (interp (hardwarePrimitive D_0 j_0 realize) (.app fn arg)
   semanticEnv) :=
identity_internal_channelTreeCompleteness D_0 j_0 realize
  (show (initialChannelConfig (.app fn arg) quantum).control =
   .term (.app fn arg) from rfl)
hfn

/-- Function evaluation under an argument frame is residual bind of
`applyContinuation`; selectors act only on the leftover coordinate. -/
theorem selectPath_app {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
   (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (fn arg : Term (QubitPrimitive C))
  (semanticEnv : Env (HSemanticValue D_0 j_0))
  (selectors : List Bool) (i : Nat)
  (k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)) :
HardwareAdequacy.selectPath selectors
  (interp (hardwarePrimitive D_0 j_0 realize) (.app fn arg)
   semanticEnv) i k =
semanticBind (Q := TTEExternalContinuationPower 2)
  (D_0 := D_0) (j_0 := j_0)
  (applyContinuation (Q := TTEExternalContinuationPower 2)
   (D_0 := D_0) (j_0 := j_0)
   (interp (hardwarePrimitive D_0 j_0 realize) arg) semanticEnv)
  (interp (hardwarePrimitive D_0 j_0 realize) fn semanticEnv)
  (HardwareAdequacy.encodePath selectors i) k := by
rw [interp_app_apply, HardwareAdequacy.selectPath_apply_encode]
rfl

/-- Argument evaluation under a function frame is residual bind of
`semanticUnfold`. -/
theorem evaluateArgument_channelTreeCompleteness {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
   (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} {fn : RuntimeValue C}
  {arg : Term (QubitPrimitive C)} {callEnv : RuntimeEnv C}
  {rest : EvalStack C}
  (hc : s.control = .value fn)
  (hs : s.stack = .argument arg callEnv :: rest)
  {denotation : HSemanticComp D_0 j_0}
  (hcomplete : ChannelTreeCompleteness D_0 j_0 realize
   { s with
     control := .term arg
     env := callEnv
     stack := .function fn :: rest }
   denotation) :
ChannelTreeCompleteness D_0 j_0 realize s denotation := by
let t : ChannelConfig C :=
{ s with
  control := .term arg
  env := callEnv
  stack := .function fn :: rest }
have hstep : ChannelInternalStep s t := by
have happ :
  ChannelInternalStep
  { s with

```

```

        control := .value fn
        stack := .argument arg callEnv :: rest } t :=
ChannelInternalStep.evaluateArgument
  (s := s) (fn := fn) (arg := arg) (callEnv := callEnv)
  (rest := rest)
have hsrc :
  s = { s with
    control := .value fn
    stack := .argument arg callEnv :: rest } :=
  ChannelConfig.ext hc rfl hs rfl
exact hsrc.symm |> happ
refine identity_step_channelTreeCompleteness D_0 j_0 realize hstep ?hop
?hunq hcomplete
* simp [channelInternalOperation, hc]
* intro t' h'
  exact ChannelInternalStep.eq_of_evaluateArgument h' hc hs

/-- Closure beta is an identity administrative step into the body. -/
theorem beta_channelTreeCompleteness {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} {x : Name}
  {body : Term (QubitPrimitive C)} {closureEnv : RuntimeEnv C}
  {arg : RuntimeValue C} {rest : EvalStack C}
  (hc : s.control = .value arg)
  (hs : s.stack = .function (.closure x body closureEnv) :: rest)
  {denotation : HSemanticComp D_0 j_0}
  (hcomplete : ChannelTreeCompleteness D_0 j_0 realize
    { s with
      control := .term body
      env := RuntimeEnv.bind x arg closureEnv
      stack := rest }
    denotation) :
  ChannelTreeCompleteness D_0 j_0 realize s denotation := by
let t : ChannelConfig C :=
  { s with
    control := .term body
    env := RuntimeEnv.bind x arg closureEnv
    stack := rest }
have hstep : ChannelInternalStep s t := by
  have happ :
    ChannelInternalStep
      { s with
        control := .value arg
        stack := .function (.closure x body closureEnv) :: rest } t :=
    ChannelInternalStep.beta (s := s) (x := x) (body := body)
      (closureEnv := closureEnv) (arg := arg) (rest := rest)
  have hsrc :
    s = { s with
      control := .value arg
      stack := .function (.closure x body closureEnv) :: rest } :=
    ChannelConfig.ext hc rfl hs rfl
  exact hsrc.symm |> happ
refine identity_step_channelTreeCompleteness D_0 j_0 realize hstep ?hop
?hunq hcomplete
* simp [channelInternalOperation, hc]
* intro t' h'
  exact ChannelInternalStep.eq_of_beta h' hc hs

/-- Recursive-closure beta is an identity step into one finite unfolding. -/
theorem recBeta_channelTreeCompleteness {C : Type}

```



```

(D_0 : QDomain.{0})
(j_0 : IsContinuousLatticeProjection D_0.carrier
  (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
(realize : C -> HSemanticValue D_0 j_0)
{s : ChannelConfig C} {self x : Name}
{body : Term (QubitPrimitive C)} {closureEnv : RuntimeEnv C}
{arg : RuntimeValue C} {rest : EvalStack C}
(hc : s.control = .value arg)
(hs : s.stack =
  .function (.recClosure self x body closureEnv) :: rest)
{denotation : HSemanticComp D_0 j_0}
(hcomplete : ChannelTreeCompleteness D_0 j_0 realize
  { s with
    control := .term body
    env :=
      RuntimeEnv.bind x arg
      (RuntimeEnv.bind self
        (.recClosure self x body closureEnv) closureEnv)
    stack := rest }
  denotation) :
ChannelTreeCompleteness D_0 j_0 realize s denotation := by
let t : ChannelConfig C :=
{ s with
  control := .term body
  env :=
    RuntimeEnv.bind x arg
    (RuntimeEnv.bind self
      (.recClosure self x body closureEnv) closureEnv)
  stack := rest }
have hstep : ChannelInternalStep s t := by
  have happ :
    ChannelInternalStep
    { s with
      control := .value arg
      stack :=
        .function (.recClosure self x body closureEnv) :: rest }
    t :=
    ChannelInternalStep.recBeta (s := s) (self := self) (x := x)
    (body := body) (closureEnv := closureEnv) (arg := arg)
    (rest := rest)
  have hsrc :
    s = { s with
      control := .value arg
      stack :=
        .function (.recClosure self x body closureEnv) :: rest } :=
    ChannelConfig.ext hc rfl hs rfl
  exact hsrc.symm |> happ
refine identity_step_channelTreeCompleteness D_0 j_0 realize hstep ?hop
?hunq hcomplete
* simp [channelInternalOperation, hc]
* intro t' h'
  exact ChannelInternalStep.eq_of_recBeta h' hc hs

/-- Abstraction is an identity step to the related closure value. -/
theorem lambda_channelTreeCompleteness {C : Type}
(D_0 : QDomain.{0})
(j_0 : IsContinuousLatticeProjection D_0.carrier
  (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
(realize : C -> HSemanticValue D_0 j_0)
{s : ChannelConfig C} {x : Name} {body : Term (QubitPrimitive C)}
(hc : s.control = .term (.lam x body))
{denotation : HSemanticComp D_0 j_0}
(hcomplete : ChannelTreeCompleteness D_0 j_0 realize

```

```

    { s with control := .value (.closure x body s.env) }
    denotation) :
  ChannelTreeCompleteness D_0 j_0 realize s denotation := by
let t : ChannelConfig C :=
  { s with control := .value (.closure x body s.env) }
have hstep : ChannelInternalStep s t := by
  have happ :
    ChannelInternalStep
      { s with control := .term (.lam x body) } t :=
    ChannelInternalStep.lambda (s := s) (x := x) (body := body)
  have hsrc : s = { s with control := .term (.lam x body) } :=
    ChannelConfig.ext hc rfl rfl rfl
  exact hsrc.symm |> happ
refine identity_step_channelTreeCompleteness D_0 j_0 realize hstep ?hop
?hunq hcomplete
* simp [channelInternalOperation, hc]
* intro t' h'
  exact ChannelInternalStep.eq_of_lambda h' hc

/-- Recursive abstraction is an identity step to the related recursive
closure; the denotation remains the Scott fixed point, not a finite
unfolding. -/
theorem recLam_identity_channelTreeCompleteness {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} {self arg : Name}
  {body : Term (QubitPrimitive C)}
  (hc : s.control = .term (.recLam self arg body))
  {denotation : HSemanticComp D_0 j_0}
  (hcomplete : ChannelTreeCompleteness D_0 j_0 realize
    { s with
      control := .value (.recClosure self arg body s.env) }
    denotation) :
  ChannelTreeCompleteness D_0 j_0 realize s denotation := by
let t : ChannelConfig C :=
  { s with control := .value (.recClosure self arg body s.env) }
have hstep : ChannelInternalStep s t := by
  have happ :
    ChannelInternalStep
      { s with control := .term (.recLam self arg body) } t :=
    ChannelInternalStep.recursive (s := s) (self := self) (arg := arg)
      (body := body)
  have hsrc :
    s = { s with control := .term (.recLam self arg body) } :=
    ChannelConfig.ext hc rfl rfl rfl
  exact hsrc.symm |> happ
refine identity_step_channelTreeCompleteness D_0 j_0 realize hstep ?hop
?hunq hcomplete
* simp [channelInternalOperation, hc]
* intro t' h'
  exact ChannelInternalStep.eq_of_recursive h' hc

/-- Finite Scott unfoldings of a recursive closure are the denotations
used by fuel induction: the full fixed point is their supremum. -/
theorem recLambdaValue_iSup_le_related
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (self arg : Name)
  (body : ScottMap (Env (HSemanticValue D_0 j_0)) (HSemanticComp D_0 j_0))
  (? : Env (HSemanticValue D_0 j_0))

```

```

(fuel : Nat) :
ScottFixApproximation.iterateBot
  (recFunctional (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0) self arg body ?) fuel <=
  recLambdaValue (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0) self arg body ? :=
ScottFixApproximation.iterateBot_le_fix _ _

```

Lean 4 source (lines 801–1200)

```

/-- Related CEK states inherit channel-tree completeness along any identity
administrative step that is not internal choice. The empty-stack initial
theorem is the special case of a related start. -/
theorem related_identity_channelTreeCompleteness {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C}
  {denotation : HSemanticComp D_0 j_0}
  {fn arg : Term (QubitPrimitive C)}
  (hc : s.control = .term (.app fn arg))
  (_hrel : ChannelConfigRel D_0 j_0 realize s denotation)
  (hcomplete : ChannelTreeCompleteness D_0 j_0 realize
    { s with
      control := .term fn
      stack := .argument arg s.env :: s.stack }
    denotation) :
  ChannelTreeCompleteness D_0 j_0 realize s denotation :=
  identity_internal_channelTreeCompleteness D_0 j_0 realize hc hcomplete

/-- The initial related configuration inherits channel-tree completeness
from any proof that the closed term is complete. -/
theorem related_initial_channelTreeCompleteness {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (code : Term (QubitPrimitive C))
  (quantum : NormalizedDensity 2)
  (semanticEnv : Env (HSemanticValue D_0 j_0))
  (hcomplete : ChannelTreeCompleteness D_0 j_0 realize
    (initialChannelConfig code quantum)
    (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv)) :
  ChannelConfigRel D_0 j_0 realize (initialChannelConfig code quantum)
    (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv) /\
  ChannelTreeCompleteness D_0 j_0 realize
    (initialChannelConfig code quantum)
    (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv) :=
  <initialChannelConfig_related D_0 j_0 realize code quantum semanticEnv,
  hcomplete>

/-- Recursive denotations are the supremum of finite Scott unfoldings, so a
fuel-bounded completeness proof for each `iterateBot` stage lifts by Scott
continuity of `selectPath`. -/
theorem selectPath_recLambdaValue_iSup
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (self arg : Name)
  (body : ScottMap (Env (HSemanticValue D_0 j_0)) (HSemanticComp D_0 j_0))
  (? : Env (HSemanticValue D_0 j_0))
  (selectors : List Bool) (i : Nat)
  (k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)) :

```

```

HardwareAdequacy.selectPath selectors
  (semanticUnit (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0)
    (recLambdaValue (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0) self arg body ?)) i k =
HardwareAdequacy.selectPath selectors
  (semanticUnit (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0)
    (bigcup fuel, ScottFixApproximation.iterateBot
      (recFunctional (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0) self arg body ?) fuel)) i k := by
rw [recLambdaValue_eq_iSup_channel_finite]

/-- Closed recursive abstractions denote the unit of the Scott fixed point,
which is the supremum of the finite unfoldings used by fuel induction. -/
theorem recLam_denotation_eq_iSup_iterateBot {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (self arg : Name) (body : Term (QubitPrimitive C))
  (semanticEnv : Env (HSemanticValue D_0 j_0)) :
  interp (hardwarePrimitive D_0 j_0 realize) (.recLam self arg body)
    semanticEnv =
  semanticUnit (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0)
    (bigcup fuel, ScottFixApproximation.iterateBot
      (recFunctional (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0) self arg
        (interp (hardwarePrimitive D_0 j_0 realize) body) semanticEnv)
      fuel) := by
rw [interp_recLam_apply, recLambdaValue_eq_iSup_channel_finite]

/-- Closed recursive abstractions denote the unit of the Scott fixed point.
Selector paths commute with that unit, so fuel induction may replace the
fixed point by the supremum of `iterateBot` stages. -/
theorem selectPath_recLam {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (self arg : Name) (body : Term (QubitPrimitive C))
  (semanticEnv : Env (HSemanticValue D_0 j_0))
  (selectors : List Bool) (i : Nat)
  (k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)) :
  HardwareAdequacy.selectPath selectors
    (interp (hardwarePrimitive D_0 j_0 realize) (.recLam self arg body)
      semanticEnv) i k =
  HardwareAdequacy.selectPath selectors
    (semanticUnit (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0)
      (bigcup fuel, ScottFixApproximation.iterateBot
        (recFunctional (Q := TTEExternalContinuationPower 2)
          (D_0 := D_0) (j_0 := j_0) self arg
          (interp (hardwarePrimitive D_0 j_0 realize) body)
            semanticEnv) fuel)) i k := by
rw [recLam_denotation_eq_iSup_iterateBot]

/-- Each finite unfolding is below the recursive denotation, so a
fuel-indexed lower bound for `iterateBot` is a lower bound for `recLam`. -/
theorem selectPath_iterateBot_le_recLam {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier

```

```

    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (self arg : Name) (body : Term (QubitPrimitive C))
  (semanticEnv : Env (HSemanticValue D_0 j_0))
  (fuel : Nat)
  (selectors : List Bool) (i : Nat)
  (k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)) :
HardwareAdequacy.selectPath selectors
  (semanticUnit (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0)
    (ScottFixApproximation.iterateBot
      (recFunctional (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0) self arg
        (interp (hardwarePrimitive D_0 j_0 realize) body)
        semanticEnv) fuel)) i k <=
HardwareAdequacy.selectPath selectors
  (interp (hardwarePrimitive D_0 j_0 realize) (.recLam self arg body)
    semanticEnv) i k := by
rw [interp_recLam_apply, HardwareAdequacy.selectPath_apply_encode,
  HardwareAdequacy.selectPath_apply_encode]
exact
  (semanticUnit (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0)).monotone
  (ScottFixApproximation.iterateBot_le_fix _ _)
  (HardwareAdequacy.encodePath selectors i) k

/-- Tagged unit is evaluation: a finite unfolding and the recursive value
are compared only after the same result continuation. -/
theorem semanticUnit_apply_eq
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (d : HSemanticValue D_0 j_0) (i : Nat)
  (k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)) :
semanticUnit (Q := TTEExternalContinuationPower 2)
  (D_0 := D_0) (j_0 := j_0) d i k =
  k d :=
rfl

/-- Scott continuity of the result continuation moves it through the
supremum of finite unfoldings. -/
theorem continuation_iSup_iterateBot
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (self arg : Name)
  (body : ScottMap (Env (HSemanticValue D_0 j_0)) (HSemanticComp D_0 j_0))
  (? : Env (HSemanticValue D_0 j_0))
  (k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)) :
k (recLambdaValue (Q := TTEExternalContinuationPower 2)
  (D_0 := D_0) (j_0 := j_0) self arg body ?) =
  bigcup fuel, k (ScottFixApproximation.iterateBot
    (recFunctional (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0) self arg body ?) fuel) := by
rw [recLambdaValue_eq_iSup_channel_finite]
rw [ <- sSup_range,
  k.preservesDirectedSup_coe
    (Set.range
      (ScottFixApproximation.iterateBot
        (recFunctional (Q := TTEExternalContinuationPower 2)
          (D_0 := D_0) (j_0 := j_0) self arg body ?)))
    (ScottFixApproximation.iterateBot_range_nonempty _)
    (ScottFixApproximation.iterateBot_range_directed _),

```

```

    <- Set.range_comp, sSup_range]
  rfl

/-- The recursive unit at any coordinate is the supremum of the finite
unfolding units at that same continuation. -/
theorem semanticUnit_recLambdaValue_eq_iSup_iterateBot
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (self arg : Name)
  (body : ScottMap (Env (HSemanticValue D_0 j_0)) (HSemanticComp D_0 j_0))
  (? : Env (HSemanticValue D_0 j_0))
  (i : Nat)
  (k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)) :
  semanticUnit (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0)
    (recLambdaValue (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0) self arg body ?) i k =
  bigcup fuel,
  semanticUnit (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0)
    (ScottFixApproximation.iterateBot
      (recFunctional (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0) self arg body ?) fuel) i k := by
  simpa [semanticUnit_apply_eq] using
    continuation_iSup_iterateBot D_0 j_0 self arg body ? k

/-- One successor unfolding is exactly `recFunctional` at the previous
finite stage. -/
theorem semanticUnit_iterateBot_succ
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (self arg : Name)
  (body : ScottMap (Env (HSemanticValue D_0 j_0)) (HSemanticComp D_0 j_0))
  (? : Env (HSemanticValue D_0 j_0))
  (fuel : Nat) (i : Nat)
  (k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)) :
  semanticUnit (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0)
    (ScottFixApproximation.iterateBot
      (recFunctional (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0) self arg body ?) (fuel + 1)) i k =
  semanticUnit (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0)
    (recFunctional (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0) self arg body ?
      (ScottFixApproximation.iterateBot
        (recFunctional (Q := TTEExternalContinuationPower 2)
          (D_0 := D_0) (j_0 := j_0) self arg body ?) fuel)) i k := by
  rw [ScottFixApproximation.iterateBot_succ]

/-- Tokens of a recursive value are exactly tokens of some finite
unfolding. Membership in the Scott supremum of rounded theories is
existential in the fuel. -/
theorem mem_recLambdaValue_iff_exists_iterateBot
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (self arg : Name)
  (body : ScottMap (Env (HSemanticValue D_0 j_0)) (HSemanticComp D_0 j_0))
  (? : Env (HSemanticValue D_0 j_0))
  (i : Nat)

```

```

(k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2))
(token : TTObservationToken 2) :
token in
  semanticUnit (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0)
    (recLambdaValue (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0) self arg body ?) i k <->
exists fuel,
  token in
    semanticUnit (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0)
      (ScottFixApproximation.iterateBot
        (recFunctional (Q := TTEExternalContinuationPower 2)
          (D_0 := D_0) (j_0 := j_0) self arg body ?) fuel) i k := by
rw [semanticUnit_recLambdaValue_eq_iSup_iterateBot]
rw [ <- sSup_range, RoundedTheory.mem_sSup]
constructor
* rintro <T, <fuel, rfl>, ht>
  exact <fuel, ht>
* rintro <fuel, ht>
  exact <_, <fuel, rfl>, ht>

/-- Closed `recLam` tokens are tokens of some finite unfolding. -/
theorem mem_selectPath_recLam_iff_exists_iterateBot {C : Type}
(D_0 : QDomain.{0})
(j_0 : IsContinuousLatticeProjection D_0.carrier
  (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
(realize : C -> HSemanticValue D_0 j_0)
(self arg : Name) (body : Term (QubitPrimitive C))
(semanticEnv : Env (HSemanticValue D_0 j_0))
(selectors : List Bool) (i : Nat)
(k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2))
(token : TTObservationToken 2) :
token in HardwareAdequacy.selectPath selectors
  (interp (hardwarePrimitive D_0 j_0 realize) (.recLam self arg body)
    semanticEnv) i k <->
exists fuel,
  token in HardwareAdequacy.selectPath selectors
    (semanticUnit (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0)
      (ScottFixApproximation.iterateBot
        (recFunctional (Q := TTEExternalContinuationPower 2)
          (D_0 := D_0) (j_0 := j_0) self arg
            (interp (hardwarePrimitive D_0 j_0 realize) body)
              semanticEnv) fuel)) i k := by
constructor
* intro ht
  rw [interp_recLam_apply, HardwareAdequacy.selectPath_apply_encode] at ht
  obtain <fuel, hfuel> :=
    (mem_recLambdaValue_iff_exists_iterateBot D_0 j_0 self arg
      (interp (hardwarePrimitive D_0 j_0 realize) body) semanticEnv
      (HardwareAdequacy.encodePath selectors i) k token).mp ht
  refine <fuel, ?_>
  rwa [HardwareAdequacy.selectPath_apply_encode]
* rintro <fuel, hfuel>
  rw [interp_recLam_apply, HardwareAdequacy.selectPath_apply_encode]
  rw [mem_recLambdaValue_iff_exists_iterateBot]
  refine <fuel, ?_>
  rwa [HardwareAdequacy.selectPath_apply_encode] at hfuel

/-- At a related empty-stack recursive closure, the path result is the
final continuation at the recursive value, hence the supremum of its
finite unfoldings. -/

```

```

theorem mem_path_recClosure_iff_exists_iterateBot {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} {self arg : Name}
  {body : Term (QubitPrimitive C)} {closureEnv : RuntimeEnv C}
  (hc : s.control = .value (.recClosure self arg body closureEnv))
  (hstack : s.stack = [])
  {active : Nat} {observedStack : ObservedStack C}
  {finalK : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)}
  {result : TTResult 2}
  (hrel : PathChannelConfigRel D_0 j_0 realize
    s active observedStack finalK result)
  (hscoped : ChannelConfig.WellScoped s)
  (token : TTObservationToken 2) :
  token in result <->
    exists (semanticEnv : Env (HSemanticValue D_0 j_0)) (fuel : Nat),
      EnvRel D_0 j_0 realize closureEnv semanticEnv /\
        token in
          semanticUnit (Q := TTEExternalContinuationPower 2)
            (D_0 := D_0) (j_0 := j_0)
            (ScottFixApproximation.iterateBot
              (recFunctional (Q := TTEExternalContinuationPower 2)
                (D_0 := D_0) (j_0 := j_0) self arg
                (interp (hardwarePrimitive D_0 j_0 realize) body)
                semanticEnv) fuel) active finalK := by
  rcases hrel with <herase, current, currentK, hcontrol, hstackRel, hresult>
  have hobserved : observedStack = [] := by
    cases observedStack with
    | nil => rfl
    | cons frame rest =>
      rw [ObservedStack.erase_cons, hstack] at herase
      cases herase
  subst observedStack
  cases hstackRel
  rw [hc] at hcontrol
  cases hcontrol with
  | value _ d _ hvalue =>
    cases hvalue with
    | recClosure _ _ _ semanticEnv henv =>
      have hvalueScoped : RuntimeValue.WellScoped
        (.recClosure self arg body closureEnv) := by
        have hctl := hscoped.left
        rw [hc] at hctl
        exact hctl.right
      rw [hresult]
      constructor
      * intro ht
      obtain <fuel, hfuel> :=
        (mem_recLambdaValue_iff_exists_iterateBot D_0 j_0 self arg
          (interp (hardwarePrimitive D_0 j_0 realize) body)
          semanticEnv active finalK token).mp ht
      exact <semanticEnv, fuel, henv, hfuel>
      * rintro <semanticEnv', fuel, henv', hfuel>
      have heq :
        recLambdaValue (Q := TTEExternalContinuationPower 2)
          (D_0 := D_0) (j_0 := j_0) self arg
          (interp (hardwarePrimitive D_0 j_0 realize) body)
          semanticEnv =
          recLambdaValue (Q := TTEExternalContinuationPower 2)
            (D_0 := D_0) (j_0 := j_0) self arg
            (interp (hardwarePrimitive D_0 j_0 realize) body)

```



```

        semanticEnv' :=
valueRel_functional D_0 j_0 realize hvalueScoped
  (ValueRel.recClosure self arg body closureEnv
    semanticEnv henv)
  (ValueRel.recClosure self arg body closureEnv
    semanticEnv' henv')
have hlim :
  token in
    semanticUnit (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0)
      (recLambdaValue (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0) self arg
        (interp (hardwarePrimitive D_0 j_0 realize) body)
        semanticEnv') active finalK :=
      (semanticUnit (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0)).monotone
      (ScottFixApproximation.iterateBot_le_fix _ fuel)
      active finalK hfuel
  rwa [ <- heq] at hlim

/-- Selector-path form of the Scott unfolding of a recursive value. -/
theorem selectPath_recLambdaValue_eq_iSup_iterateBot
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (self arg : Name)
  (body : ScottMap (Env (HSemanticValue D_0 j_0)) (HSemanticComp D_0 j_0))
  (? : Env (HSemanticValue D_0 j_0))
  (selectors : List Bool) (i : Nat)
  (k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)) :
  HardwareAdequacy.selectPath selectors

```

Lean 4 source (lines 1201–1600)

```

  (semanticUnit (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0)
    (recLambdaValue (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0) self arg body ?)) i k =
  bigcup fuel,
  HardwareAdequacy.selectPath selectors
  (semanticUnit (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0)
    (ScottFixApproximation.iterateBot
      (recFunctional (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0) self arg body ?) fuel)) i k := by
  rw [HardwareAdequacy.selectPath_apply_encode,
    semanticUnit_recLambdaValue_eq_iSup_iterateBot]
  refine iSup_congr fun fuel => ?_
  rw [HardwareAdequacy.selectPath_apply_encode]

/-- A uniform upper bound for every finite unfolding is an upper bound
for the recursive fixed point. This is the Scott-continuity half of
fuel induction. -/
theorem selectPath_recLambdaValue_le_of_iterateBot
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (self arg : Name)
  (body : ScottMap (Env (HSemanticValue D_0 j_0)) (HSemanticComp D_0 j_0))
  (? : Env (HSemanticValue D_0 j_0))
  (selectors : List Bool) (i : Nat)
  (k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2))
  {T : TTResult 2}
  (hle : forall fuel,

```

```

HardwareAdequacy.selectPath selectors
  (semanticUnit (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0)
    (ScottFixApproximation.iterateBot
      (recFunctional (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0) self arg body ?) fuel)) i k <= T) :
HardwareAdequacy.selectPath selectors
  (semanticUnit (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0)
    (recLambdaValue (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0) self arg body ?)) i k <= T := by
rw [selectPath_recLambdaValue_eq_iSup_iterateBot]
exact iSup_le hle

/-- Presented completeness of the recursive fixed point from soundness
plus a fuel-indexed lower bound. Each `iterateBot` stage remains a
finite denotation; no single tree is identified with the fixed point. -/
theorem presented_recLambdaValue_of_iterateBot {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (start : ChannelConfig C)
  (self arg : Name)
  (body : ScottMap (Env (HSemanticValue D_0 j_0)) (HSemanticComp D_0 j_0))
  (? : Env (HSemanticValue D_0 j_0))
  (hsound : forall selectors i
    (? : HSemanticValue D_0 j_0 -> FiniteInstrumentComp 2 PUnit.{1})
    (k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)),
    (forall d, k d = (? d).satisfiedTTTheory resultCode) ->
    sSup (channelTreeResults D_0 j_0 realize start selectors i k) <=
      HardwareAdequacy.selectPath selectors
        (semanticUnit (Q := TTEExternalContinuationPower 2)
          (D_0 := D_0) (j_0 := j_0)
          (recLambdaValue (Q := TTEExternalContinuationPower 2)
            (D_0 := D_0) (j_0 := j_0) self arg body ?)) i k)
  (hlower : forall fuel selectors i
    (? : HSemanticValue D_0 j_0 -> FiniteInstrumentComp 2 PUnit.{1})
    (k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)),
    (forall d, k d = (? d).satisfiedTTTheory resultCode) ->
    HardwareAdequacy.selectPath selectors
      (semanticUnit (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0)
        (ScottFixApproximation.iterateBot
          (recFunctional (Q := TTEExternalContinuationPower 2)
            (D_0 := D_0) (j_0 := j_0) self arg body ?) fuel)) i k <=
        sSup (channelTreeResults D_0 j_0 realize start selectors i k)) :
  PresentedChannelTreeCompleteness D_0 j_0 realize start
  (semanticUnit (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0)
    (recLambdaValue (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0) self arg body ?)) where
selected_result_eq_channelTree_sup_presented := by
intro selectors i ? k hk
apply le_antisymm
* exact selectPath_recLambdaValue_le_of_iterateBot D_0 j_0
  self arg body ? selectors i k (fun fuel => hlower fuel selectors i ? k hk)
* exact hsound selectors i ? k hk

/-- Finite unfolding of a related recursive closure at a chosen fuel. -/
noncomputable def recClosureFuelValue {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier

```

```

    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (self arg : Name) (body : Term (QubitPrimitive C))
  (semanticEnv : Env (HSemanticValue D_0 j_0)) (fuel : Nat) :
  HSemanticValue D_0 j_0 :=
ScottFixApproximation.iterateBot
  (recFunctional (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0) self arg
    (interp (hardwarePrimitive D_0 j_0 realize) body) semanticEnv) fuel

/-- Fuel-indexed logical relation. Ordinary values ignore the fuel.
Recursive closures are related to the `fuel`-fold `iterateBot` unfolding
rather than the Scott fixed point. -/
inductive FuelValueRel {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0) :
  Nat -> RuntimeValue C -> HSemanticValue D_0 j_0 -> Prop where
| payload (fuel : Nat) (c : C) :
  FuelValueRel D_0 j_0 realize fuel (.payload c) (realize c)
| closure (fuel : Nat) (x : Name) (body : Term (QubitPrimitive C))
  (runtimeEnv : RuntimeEnv C)
  (semanticEnv : Env (HSemanticValue D_0 j_0))
  (henv : forall y v, RuntimeEnv.lookup y runtimeEnv = some v ->
    FuelValueRel D_0 j_0 realize fuel v (semanticEnv y)) :
  FuelValueRel D_0 j_0 realize fuel (.closure x body runtimeEnv)
  (lambdaValue (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0) x
    (interp (hardwarePrimitive D_0 j_0 realize) body) semanticEnv)
| recClosure (fuel : Nat) (self arg : Name)
  (body : Term (QubitPrimitive C))
  (runtimeEnv : RuntimeEnv C)
  (semanticEnv : Env (HSemanticValue D_0 j_0))
  (henv : forall y v, RuntimeEnv.lookup y runtimeEnv = some v ->
    FuelValueRel D_0 j_0 realize fuel v (semanticEnv y)) :
  FuelValueRel D_0 j_0 realize fuel
  (.recClosure self arg body runtimeEnv)
  (recClosureFuelValue D_0 j_0 realize self arg body semanticEnv fuel)

/-- Agreement of a finite runtime environment with a fuel-truncated
semantic one. -/
def FuelEnvRel {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (fuel : Nat)
  (runtimeEnv : RuntimeEnv C)
  (semanticEnv : Env (HSemanticValue D_0 j_0)) : Prop :=
forall x v, RuntimeEnv.lookup x runtimeEnv = some v ->
  FuelValueRel D_0 j_0 realize fuel v (semanticEnv x)

theorem recClosureFuelValue_zero {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (self arg : Name) (body : Term (QubitPrimitive C))
  (semanticEnv : Env (HSemanticValue D_0 j_0)) :
  recClosureFuelValue D_0 j_0 realize self arg body semanticEnv 0 = False :=
ScottFixApproximation.iterateBot_zero _

```

```

theorem recClosureFuelValue_succ {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (self arg : Name) (body : Term (QubitPrimitive C))
  (semanticEnv : Env (HSemanticValue D_0 j_0)) (fuel : Nat) :
  recClosureFuelValue D_0 j_0 realize self arg body semanticEnv (fuel + 1) =
    recFunctional (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0) self arg
      (interp (hardwarePrimitive D_0 j_0 realize) body) semanticEnv
      (recClosureFuelValue D_0 j_0 realize self arg body semanticEnv fuel) :=
    ScottFixApproximation.iterateBot_succ _ _

theorem recClosureFuelValue_le_recLambdaValue {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (self arg : Name) (body : Term (QubitPrimitive C))
  (semanticEnv : Env (HSemanticValue D_0 j_0)) (fuel : Nat) :
  recClosureFuelValue D_0 j_0 realize self arg body semanticEnv fuel <=
    recLambdaValue (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0) self arg
      (interp (hardwarePrimitive D_0 j_0 realize) body) semanticEnv :=
    ScottFixApproximation.iterateBot_le_fix _ _

theorem recLambdaValue_eq_iSup_recClosureFuelValue {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (self arg : Name) (body : Term (QubitPrimitive C))
  (semanticEnv : Env (HSemanticValue D_0 j_0)) :
  recLambdaValue (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0) self arg
    (interp (hardwarePrimitive D_0 j_0 realize) body) semanticEnv =
    bigcup fuel, recClosureFuelValue D_0 j_0 realize self arg body
    semanticEnv fuel :=
  recLambdaValue_eq_iSup_channel_finite D_0 j_0 self arg
    (interp (hardwarePrimitive D_0 j_0 realize) body) semanticEnv

/-- The zero unfolding is bottom, so a related recursive closure at fuel
zero contributes no token. -/
theorem fuelValueRel_recClosure_zero {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {self arg : Name} {body : Term (QubitPrimitive C)}
  {runtimeEnv : RuntimeEnv C}
  {semanticEnv : Env (HSemanticValue D_0 j_0)}
  (henv : FuelEnvRel D_0 j_0 realize 0 runtimeEnv semanticEnv) :
  FuelValueRel D_0 j_0 realize 0
    (.recClosure self arg body runtimeEnv) False := by
  have h := FuelValueRel.recClosure (D_0 := D_0) (j_0 := j_0)
    (realize := realize) 0 self arg body runtimeEnv semanticEnv henv
  rwa [recClosureFuelValue_zero] at h

/-- One successor unfolding is `recFunctional` at the previous fuel. -/
theorem fuelValueRel_recClosure_succ {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier

```

```

    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {self arg : Name} {body : Term (QubitPrimitive C)}
  {runtimeEnv : RuntimeEnv C}
  {semanticEnv : Env (HSemanticValue D_0 j_0)}
  {fuel : Nat}
  (henv : FuelEnvRel D_0 j_0 realize (fuel + 1) runtimeEnv semanticEnv) :
  FuelValueRel D_0 j_0 realize (fuel + 1)
    (.recClosure self arg body runtimeEnv)
    (recFunctional (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0) self arg
      (interp (hardwarePrimitive D_0 j_0 realize) body) semanticEnv
      (recClosureFuelValue D_0 j_0 realize self arg body
        semanticEnv fuel)) := by
  have h := FuelValueRel.recClosure (D_0 := D_0) (j_0 := j_0)
    (realize := realize) (fuel + 1) self arg body runtimeEnv
    semanticEnv henv
  rwa [recClosureFuelValue_succ] at h

/-- Unfolding a finite recursive approximant applies the body with `self`
bound to the previous fuel. This is the semantic `recBeta` step used by
fuel induction. -/
theorem applyComp_pure_recFunctional
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (self arg : Name)
  (body : ScottMap (Env (HSemanticValue D_0 j_0)) (HSemanticComp D_0 j_0))
  (? : Env (HSemanticValue D_0 j_0))
  (approx d : HSemanticValue D_0 j_0) :
  applyComp (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0)
    ((semanticUnit (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0)).comp
      (ScottMap.const
        (recFunctional (Q := TTEExternalContinuationPower 2)
          (D_0 := D_0) (j_0 := j_0) self arg body ? approx)))
    ((semanticUnit (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0)).comp
      (ScottMap.const d))
    ? =
  body
    (envUpdate (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0) arg
      (envUpdate (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0) self (? , approx), d)) := by
  rw [applyComp_apply]
  change
    semanticBind (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0)
      (applyContinuation (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0)
        ((semanticUnit (Q := TTEExternalContinuationPower 2)
          (D_0 := D_0) (j_0 := j_0)).comp
          (ScottMap.const d)) ?)
      (semanticUnit (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0)
        (recFunctional (Q := TTEExternalContinuationPower 2)
          (D_0 := D_0) (j_0 := j_0) self arg body ? approx)) =
  body
    (envUpdate (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0) arg
      (envUpdate (Q := TTEExternalContinuationPower 2)

```

```

      (D_0 := D_0) (j_0 := j_0) self (?, approx), d))
have hOuter := congrArg
  (fun f : ScottMap (HSemanticValue D_0 j_0) (HSemanticComp D_0 j_0) =>
    f (recFunctional (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0) self arg body ? approx))
  (IsQuantumMonad.unit_bind (Q := TTEExternalContinuationPower 2)
    (applyContinuation (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0)
      ((semanticUnit (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0)).comp
        (ScottMap.const d)) ?))
rw [ScottMap.comp_apply] at hOuter
rw [hOuter, applyContinuation_apply]
have harg :
  ((semanticUnit (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0)).comp
    (ScottMap.const d)) ? =
  semanticUnit (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0) d :=
  rfl
rw [harg]
have hInner := congrArg
  (fun f : ScottMap (HSemanticValue D_0 j_0) (HSemanticComp D_0 j_0) =>
    f d)
  (IsQuantumMonad.unit_bind (Q := TTEExternalContinuationPower 2)
    (semanticUnfold (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0)
      (recFunctional (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0) self arg body ? approx))))
rw [ScottMap.comp_apply] at hInner
refine hInner.trans ?_
change
  qEmbInfInf (QModel (TTEExternalContinuationPower 2)) D_0 j_0
    (qProjInfInf (QModel (TTEExternalContinuationPower 2)) D_0 j_0
      (scottLambda
        (body.comp
          ((envUpdate (Q := TTEExternalContinuationPower 2)
            (D_0 := D_0) (j_0 := j_0) arg).comp
            (ScottMap.pairMap
              ((envUpdate (Q := TTEExternalContinuationPower 2)
                (D_0 := D_0) (j_0 := j_0) self).comp
                ScottMap.fstMap)
              ScottMap.sndMap))))
          (?, approx)))
      d =
      body
      (envUpdate (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0) arg
        (envUpdate (Q := TTEExternalContinuationPower 2)
          (D_0 := D_0) (j_0 := j_0) self (?, approx), d))
let f : ScottMap (HSemanticValue D_0 j_0) (HSemanticComp D_0 j_0) :=
  scottLambda
    (body.comp
      ((envUpdate (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0) arg).comp
        (ScottMap.pairMap
          ((envUpdate (Q := TTEExternalContinuationPower 2)
            (D_0 := D_0) (j_0 := j_0) self).comp
            ScottMap.fstMap)
          ScottMap.sndMap)))
      (?, approx)
    )
have hf := congrArg
  (fun g : ScottMap (HSemanticValue D_0 j_0) (HSemanticComp D_0 j_0) =>

```

```

    g d)
    (qEmbInfInf_qProjInfInf (QModel (TTEExternalContinuationPower 2))
      D_0 j_0 f)
  simp only [f, scottLambda_apply, ScottMap.comp_apply,
    ScottMap.pairMap_apply, ScottMap.fstMap_apply,
    ScottMap.sndMap_apply] using hf

/-- Applying the successor unfolding is exactly one semantic `recBeta`
into the previous fuel. -/
theorem applyComp_iterateBot_succ
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (self arg : Name)
  (body : ScottMap (Env (HSemanticValue D_0 j_0)) (HSemanticComp D_0 j_0))
  (? : Env (HSemanticValue D_0 j_0))
  (fuel : Nat) (d : HSemanticValue D_0 j_0) :
  applyComp (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0)
    ((semanticUnit (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0)).comp
      (ScottMap.const
        (ScottFixApproximation.iterateBot
          (recFunctional (Q := TTEExternalContinuationPower 2)
            (D_0 := D_0) (j_0 := j_0) self arg body ?) (fuel + 1))))
      ((semanticUnit (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0)).comp
        (ScottMap.const d))
      ? =
  body
    (envUpdate (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0) arg
      (envUpdate (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0) self
        (?, ScottFixApproximation.iterateBot
          (recFunctional (Q := TTEExternalContinuationPower 2)
            (D_0 := D_0) (j_0 := j_0) self arg body ?) fuel),
        d)) := by
  rw [ScottFixApproximation.iterateBot_succ]
  exact applyComp_pure_recFunctional D_0 j_0 self arg body ?
    (ScottFixApproximation.iterateBot
      (recFunctional (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0) self arg body ?) fuel) d

/-- Syntax-level successor unfolding: applying the next `recClosureFuelValue`
evaluates the body with `self` bound to the previous fuel. -/
theorem applyComp_recClosureFuelValue_succ {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (self arg : Name) (body : Term (QubitPrimitive C))
  (semanticEnv : Env (HSemanticValue D_0 j_0))
  (fuel : Nat) (d : HSemanticValue D_0 j_0) :
  applyComp (Q := TTEExternalContinuationPower 2)

```

Lean 4 source (lines 1601–2000)

```

  (D_0 := D_0) (j_0 := j_0)
  ((semanticUnit (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0)).comp
    (ScottMap.const
      (recClosureFuelValue D_0 j_0 realize self arg body
        semanticEnv (fuel + 1))))

```

```

      ((semanticUnit (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0)).comp
        (ScottMap.const d))
      semanticEnv =
    interp (hardwarePrimitive D_0 j_0 realize) body
      (envUpdate (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0) arg
        (envUpdate (Q := TTEExternalContinuationPower 2)
          (D_0 := D_0) (j_0 := j_0) self
          (semanticEnv,
            recClosureFuelValue D_0 j_0 realize self arg body
            semanticEnv fuel),
          d)) :=
    applyComp_iterateBot_succ D_0 j_0 self arg
      (interp (hardwarePrimitive D_0 j_0 realize) body) semanticEnv fuel d

/-- A related recursive closure is the supremum of its fuel-indexed
unfoldings. -/
theorem valueRel_recClosure_eq_iSup_fuel {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {self arg : Name} {body : Term (QubitPrimitive C)}
  {runtimeEnv : RuntimeEnv C} {d : HSemanticValue D_0 j_0}
  (h : ValueRel D_0 j_0 realize
    (.recClosure self arg body runtimeEnv) d) :
  exists semanticEnv : Env (HSemanticValue D_0 j_0),
    EnvRel D_0 j_0 realize runtimeEnv semanticEnv /\
    d = bigcup fuel, recClosureFuelValue D_0 j_0 realize self arg body
    semanticEnv fuel := by
  cases h with
  | recClosure _ _ _ semanticEnv henv =>
    exact <semanticEnv, henv,
      recLambdaValue_eq_iSup_recClosureFuelValue D_0 j_0 realize
      self arg body semanticEnv>

/-- Selector paths are monotone in the returned value. -/
theorem selectPath_semanticUnit_monotone
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  {d d' : HSemanticValue D_0 j_0} (hle : d <= d')
  (selectors : List Bool) (i : Nat)
  (k : ScottMap (HSemanticValue D_0 j_0) (TResult 2)) :
  HardwareAdequacy.selectPath selectors
    (semanticUnit (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0) d) i k <=
  HardwareAdequacy.selectPath selectors
    (semanticUnit (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0) d') i k := by
  rw [HardwareAdequacy.selectPath_apply_encode,
    HardwareAdequacy.selectPath_apply_encode]
  exact
    (semanticUnit (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0)).monotone hle
    (HardwareAdequacy.encodePath selectors i) k

/-- The zero unfolding contributes the bottom observation. -/
theorem selectPath_recClosureFuelValue_zero {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))

```



```

    (realize : C -> HSemanticValue D_0 j_0)
    (self arg : Name) (body : Term (QubitPrimitive C))
    (semanticEnv : Env (HSemanticValue D_0 j_0))
    (selectors : List Bool) (i : Nat)
    (k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)) :
    HardwareAdequacy.selectPath selectors
      (semanticUnit (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0)
        (recClosureFuelValue D_0 j_0 realize self arg body
          semanticEnv 0)) i k =
      k False := by
rw [recClosureFuelValue_zero, HardwareAdequacy.selectPath_apply_encode]
rfl

/-- Each finite unfolding is below the recursive value, after any
selector path. -/
theorem selectPath_recClosureFuelValue_le_recLambdaValue {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (self arg : Name) (body : Term (QubitPrimitive C))
  (semanticEnv : Env (HSemanticValue D_0 j_0)) (fuel : Nat)
  (selectors : List Bool) (i : Nat)
  (k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)) :
  HardwareAdequacy.selectPath selectors
    (semanticUnit (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0)
      (recClosureFuelValue D_0 j_0 realize self arg body
        semanticEnv fuel)) i k <=
  HardwareAdequacy.selectPath selectors
    (semanticUnit (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0)
      (recLambdaValue (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0) self arg
        (interp (hardwarePrimitive D_0 j_0 realize) body)
        semanticEnv)) i k :=
selectPath_semanticUnit_monotone D_0 j_0
(recClosureFuelValue_le_recLambdaValue D_0 j_0 realize
  self arg body semanticEnv fuel)
selectors i k

/-- The body at a finite `self` unfolding is below the operational
`recBeta` body, which binds the full recursive value. -/
theorem interp_body_fuel_le_recBeta {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (self arg : Name) (body : Term (QubitPrimitive C))
  (semanticEnv : Env (HSemanticValue D_0 j_0))
  (fuel : Nat) (d : HSemanticValue D_0 j_0) :
  interp (hardwarePrimitive D_0 j_0 realize) body
    (envUpdate (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0) arg
      (envUpdate (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0) self
        (semanticEnv,
          recClosureFuelValue D_0 j_0 realize self arg body
            semanticEnv fuel),
        d)) <=
  interp (hardwarePrimitive D_0 j_0 realize) body
    (envUpdate (Q := TTEExternalContinuationPower 2)

```

```

(D_0 := D_0) (j_0 := j_0) arg
(envUpdate (Q := TTEExternalContinuationPower 2)
  (D_0 := D_0) (j_0 := j_0) self
  (semanticEnv,
    recLambdaValue (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0) self arg
      (interp (hardwarePrimitive D_0 j_0 realize) body)
      semanticEnv),
  d)) := by
refine (interp (hardwarePrimitive D_0 j_0 realize) body).monotone ?_
refine (envUpdate (Q := TTEExternalContinuationPower 2)
  (D_0 := D_0) (j_0 := j_0) arg).monotone ?_
refine Prod.mk_le_mk.mpr <?_, le_rfl>
exact (envUpdate (Q := TTEExternalContinuationPower 2)
  (D_0 := D_0) (j_0 := j_0) self).monotone
(Prod.mk_le_mk.mpr <le_rfl,
  recClosureFuelValue_le_recLambdaValue D_0 j_0 realize
  self arg body semanticEnv fuel>)

/-- Applying the successor unfolding is below the operational `recBeta`
denotation. -/
theorem applyComp_recClosureFuelValue_succ_le_recBeta {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (self x : Name) (body : Term (QubitPrimitive C))
  (closureEnv : RuntimeEnv C)
  (semanticEnv : Env (HSemanticValue D_0 j_0))
  (_henv : EnvRel D_0 j_0 realize closureEnv semanticEnv)
  (arg : RuntimeValue C) (d : HSemanticValue D_0 j_0)
  (_harg : ValueRel D_0 j_0 realize arg d)
  (fuel : Nat) :
  applyComp (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0)
    ((semanticUnit (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0)).comp
      (ScottMap.const
        (recClosureFuelValue D_0 j_0 realize self x body
          semanticEnv (fuel + 1)))))
    ((semanticUnit (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0)).comp
      (ScottMap.const d))
    semanticEnv <=
  interp (hardwarePrimitive D_0 j_0 realize) body
  (envUpdate (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0) x
    (envUpdate (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0) self
      (semanticEnv,
        recLambdaValue (Q := TTEExternalContinuationPower 2)
          (D_0 := D_0) (j_0 := j_0) self x
          (interp (hardwarePrimitive D_0 j_0 realize) body)
          semanticEnv),
        d)) := by
  rw [applyComp_recClosureFuelValue_succ]
  exact interp_body_fuel_le_recBeta D_0 j_0 realize self x body
    semanticEnv fuel d

/-- Fuel induction step: a lower bound for the body at fuel `n` is a
lower bound for applying the successor unfolding. -/
theorem selectPath_applyComp_recClosureFuelValue_succ_le_of_body {C : Type}
  (D_0 : QDomain.{0})

```

```

(j_0 : IsContinuousLatticeProjection D_0.carrier
  (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
(realize : C -> HSemanticValue D_0 j_0)
(self arg : Name) (body : Term (QubitPrimitive C))
(semanticEnv : Env (HSemanticValue D_0 j_0))
(fuel : Nat) (d : HSemanticValue D_0 j_0)
(selectors : List Bool) (i : Nat)
(k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2))
{T : TTResult 2}
(hbody :
  HardwareAdequacy.selectPath selectors
    (interp (hardwarePrimitive D_0 j_0 realize) body
      (envUpdate (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0) arg
        (envUpdate (Q := TTEExternalContinuationPower 2)
          (D_0 := D_0) (j_0 := j_0) self
          (semanticEnv,
            recClosureFuelValue D_0 j_0 realize self arg body
            semanticEnv fuel),
          d))) i k <= T) :
  HardwareAdequacy.selectPath selectors
    (applyComp (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0)
      ((semanticUnit (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0)).comp
      (ScottMap.const
        (recClosureFuelValue D_0 j_0 realize self arg body
        semanticEnv (fuel + 1))))
      ((semanticUnit (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0)).comp
      (ScottMap.const d))
      semanticEnv) i k <= T := by
  rwa [applyComp_recClosureFuelValue_succ]

/-- Binding `self` to the current fuel unfolding and `arg` to a related
value preserves `FuelEnvRel`. -/
theorem recClosure_unfold_env_fuel {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  {realize : C -> HSemanticValue D_0 j_0}
  {self arg : Name} {body : Term (QubitPrimitive C)}
  {runtimeEnv : RuntimeEnv C}
  {semanticEnv : Env (HSemanticValue D_0 j_0)}
  {value : RuntimeValue C} {d : HSemanticValue D_0 j_0}
  {fuel : Nat}
  (henv : FuelEnvRel D_0 j_0 realize fuel runtimeEnv semanticEnv)
  (hvalue : FuelValueRel D_0 j_0 realize fuel value d) :
  FuelEnvRel D_0 j_0 realize fuel
    (RuntimeEnv.bind arg value
      (RuntimeEnv.bind self
        (.recClosure self arg body runtimeEnv) runtimeEnv))
    (envUpdate (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0) arg
      (envUpdate (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0) self
        (semanticEnv,
          recClosureFuelValue D_0 j_0 realize self arg body
          semanticEnv fuel),
        d)) := by
  intro y w hw
  by_cases hyarg : y = arg
  * subst y

```

```

simp [RuntimeEnv.bind, RuntimeEnv.lookup] at hw
cases hw
simp [envUpdate_apply] using hvalue
* by_cases hyself : y = self
* subst y
  simp [RuntimeEnv.bind, RuntimeEnv.lookup, hyarg] at hw
  cases hw
  simp [envUpdate_apply, envUpdate_other hyarg] using
    FuelValueRel.recClosure (D_0 := D_0) (j_0 := j_0) (realize := realize)
    fuel self arg body runtimeEnv semanticEnv henv
* simp [RuntimeEnv.bind, RuntimeEnv.lookup, hyarg, hyself] at hw
  have hy : y != arg := hyarg
  have hy' : y != self := hyself
  simp [envUpdate_apply, envUpdate_other hy, envUpdate_other hy'] using
    henv y w hw

/-- A related empty-stack recursive closure denotes the unit of its
Scott value. -/
theorem recClosure_terminal_related {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} {self arg : Name}
  {body : Term (QubitPrimitive C)} {closureEnv : RuntimeEnv C}
  (hc : s.control = .value (.recClosure self arg body closureEnv))
  (hstack : s.stack = [])
  {semanticEnv : Env (HSemanticValue D_0 j_0)}
  (henv : EnvRel D_0 j_0 realize closureEnv semanticEnv) :
  ChannelConfigRel D_0 j_0 realize s
    (semanticUnit (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0)
      (recLambdaValue (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0) self arg
        (interp (hardwarePrimitive D_0 j_0 realize) body)
        semanticEnv)) := by
  refine <semanticUnit (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0)
    (recLambdaValue (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0) self arg
      (interp (hardwarePrimitive D_0 j_0 realize) body) semanticEnv),
    id, ?_, ?_, rfl>
* exact hc.symm |> ControlRel.value _ _ s.env
  (recClosure_created D_0 j_0 realize self arg body
    closureEnv semanticEnv henv)
* rw [hstack]
  exact StackRel.nil

/-- Operational fuel induction at a related empty-stack recursive closure:
each `iterateBot` stage is below the unique terminal tree, so the Scott
fixed point is presented-complete. -/
theorem recClosure_terminal_presentedChannelTreeCompleteness {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} {self arg : Name}
  {body : Term (QubitPrimitive C)} {closureEnv : RuntimeEnv C}
  (hc : s.control = .value (.recClosure self arg body closureEnv))
  (hstack : s.stack = [])
  (hscoped : ChannelConfig.WellScoped s)
  {semanticEnv : Env (HSemanticValue D_0 j_0)}
  (henv : EnvRel D_0 j_0 realize closureEnv semanticEnv) :

```

```

PresentedChannelTreeCompleteness D_0 j_0 realize s
  (semanticUnit (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0)
    (recLambdaValue (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0) self arg
      (interp (hardwarePrimitive D_0 j_0 realize) body)
      semanticEnv)) := by
have hrel := recClosure_terminal_related D_0 j_0 realize hc hstack henv
have hterminal : ChannelTerminal s := <.recClosure self arg body closureEnv, hc, hstack>
have hd : ValueRel D_0 j_0 realize hterminal.value
  (recLambdaValue (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0) self arg
    (interp (hardwarePrimitive D_0 j_0 realize) body) semanticEnv) := by
have hv : hterminal.value =
  .recClosure self arg body closureEnv := by
  have hctl := hterminal.control_eq
  rw [hc] at hctl
  injection hctl with h
  exact h.symm
rw [hv]
exact recClosure_created D_0 j_0 realize self arg body
  closureEnv semanticEnv henv
let R := terminalValueRealization D_0 j_0 hterminal hd
refine presented_recLambdaValue_of_iterateBot D_0 j_0 realize s
  self arg (interp (hardwarePrimitive D_0 j_0 realize) body) semanticEnv
  ?hsound ?hlower
* intro selectors i ? k hk
  apply sSup_le
  rintro T <_, tree, treeR, _, rfl>
  cases tree with
  | terminal hterm =>
    exact (terminal_channelTreePointwiseSound D_0 j_0 hterm hscoped
      hrel treeR).restricted_le_selected selectors i k
  | internal hstep next =>
    exact False.elim
      (ChannelInternalStep.not_value_nil hstep hc hstack)
  | external _ hex _ =>
    exact False.elim (by cases hex <;> cases hc)
  | probability _ _ _ =>
    cases hc
  | probabilityZero _ =>
    cases hc
  | probabilityOne _ =>
    cases hc
  | measurement _ _ =>
    cases hc
* intro fuel selectors i ? k hk
  refine (selectPath_recClosureFuelValue_le_recLambdaValue D_0 j_0
    realize self arg body semanticEnv fuel selectors i k).trans ?_
  have heq :=
    terminal_restrictedResult_eq D_0 j_0 hterminal hscoped hrel R
    selectors i k
  rw [ <- heq]
  apply le_sSup
  exact <0, ChannelTree.terminal hterminal, R, le_rfl, rfl>

/-- Recursive abstraction at an empty stack is the identity wrap of the
related recursive closure, so operational fuel induction lifts through
`recLam`. -/
theorem recLam_terminal_presentedChannelTreeCompleteness {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))

```

```

(realize : C -> HSemanticValue D_0 j_0)
{s : ChannelConfig C} {self arg : Name}
{body : Term (QubitPrimitive C)}
(hc : s.control = .term (.recLam self arg body))
(hstack : s.stack = [])
(hscoped : ChannelConfig.WellScoped s)
{semanticEnv : Env (HSemanticValue D_0 j_0)}
(henv : EnvRel D_0 j_0 realize s.env semanticEnv) :
PresentedChannelTreeCompleteness D_0 j_0 realize s
  (interp (hardwarePrimitive D_0 j_0 realize)
    (.recLam self arg body) semanticEnv) := by
have hvalueScoped : RuntimeValue.WellScoped
  (.recClosure self arg body s.env) := by
have hctl := hscoped.left
rw [hc] at hctl
exact RuntimeValue.WellScoped.recClosure self arg body s.env

```

Lean 4 source (lines 2001–2400)

```

      hctl.left fun y hy => hctl.right y hy
have henvScoped : RuntimeEnv.WellScoped s.env := by
  have hctl := hscoped.left
  rw [hc] at hctl
  exact hctl.left
have hchild : PresentedChannelTreeCompleteness D_0 j_0 realize
  {s with control := .value (.recClosure self arg body s.env)}
  (semanticUnit (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0)
    (recLambdaValue (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0) self arg
      (interp (hardwarePrimitive D_0 j_0 realize) body)
      semanticEnv)) :=
recClosure_terminal_presentedChannelTreeCompleteness D_0 j_0 realize
  (s := {s with control := .value (.recClosure self arg body s.env)})
  rfl hstack
  <<henvScoped, hvalueScoped>, hscoped.right>
  henv
let t : ChannelConfig C :=
  {s with control := .value (.recClosure self arg body s.env)}
have hstep : ChannelInternalStep s t := by
  have happ :
    ChannelInternalStep
      {s with control := .term (.recLam self arg body)} t :=
    ChannelInternalStep.recursive (s := s) (self := self) (arg := arg)
    (body := body)
  have hs : s = {s with control := .term (.recLam self arg body)} :=
    ChannelConfig.ext hc rfl rfl
  exact hs.symm |> happ
rw [interp_recLam_apply]
exact identity_step_presentedChannelTreeCompleteness D_0 j_0 realize
  hstep (by simp [channelInternalOperation, hc])
  (fun h' => ChannelInternalStep.eq_of_recursive h' hc) hchild

/-- A syntactically closed `recLam` at a normalized start is
presented-complete: the unique empty-stack unfolding is the Scott
fixed point of its finite `iterateBot` stages. -/
theorem recLam_initial_presentedChannelTreeCompleteness {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (self arg : Name) (body : Term (QubitPrimitive C))
  (hclosed : Closed (.recLam self arg body))
  (quantum : NormalizedDensity 2)

```

```

    (semanticEnv : Env (HSemanticValue D_0 j_0)) :
    PresentedChannelTreeCompleteness D_0 j_0 realize
      (initialChannelConfig (.recLam self arg body) quantum)
      (interp (hardwarePrimitive D_0 j_0 realize)
        (.recLam self arg body) semanticEnv) :=
  recLam_terminal_presentedChannelTreeCompleteness D_0 j_0 realize
  rfl rfl (initialChannelConfig_wellScoped hclosed quantum)
  (env_nil D_0 j_0 realize semanticEnv)

/-- Packaged presented completeness for a closed initial `recLam`. -/
theorem recLam_initial_presentedChannelConfigCompleteness {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (self arg : Name) (body : Term (QubitPrimitive C))
  (hclosed : Closed (.recLam self arg body))
  (quantum : NormalizedDensity 2)
  (semanticEnv : Env (HSemanticValue D_0 j_0)) :
  PresentedChannelConfigCompleteness D_0 j_0 realize
    (initialChannelConfig (.recLam self arg body) quantum)
    (interp (hardwarePrimitive D_0 j_0 realize)
      (.recLam self arg body) semanticEnv) where
  related := initialChannelConfig_related D_0 j_0 realize
    (.recLam self arg body) quantum semanticEnv
  complete := recLam_initial_presentedChannelTreeCompleteness D_0 j_0
    realize self arg body hclosed quantum semanticEnv

/-- Presented completeness is token adequacy at finitely represented
final continuations. -/
theorem presented_channel_tree_token_adequacy_iff {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (start : ChannelConfig C) (denotation : HSemanticComp D_0 j_0)
  (hcomplete : PresentedChannelTreeCompleteness D_0 j_0 realize
    start denotation)
  (selectors : List Bool)
  (? : HSemanticValue D_0 j_0 -> FiniteInstrumentComp 2 PUnit.{1})
  (k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2))
  (hk : forall d, k d = (? d).satisfiedTTTheory resultCode)
  (i : Nat) (token : TTObservationToken 2) :
  token in HardwareAdequacy.selectPath selectors denotation i k <->
    exists fuel, exists (tree : ChannelTree C start)
      (R : ChannelTreeRealization D_0 j_0 realize tree),
      tree.depth <= fuel /\
      ResultAvailable tree selectors i /\
      TTObservationToken.Holds resultCode token
      ((restrictedInstrument D_0 j_0 realize tree R selectors i).bind
        ?) := by
  classical
  rw [hcomplete.selected_result_eq_channelTree_sup_presented
    selectors i ? k hk, RoundedTheory.mem_sSup]
  constructor
  * rintro <_, <fuel, tree, R, hdepth, rfl>, htoken>
  by_cases havail : ResultAvailable tree selectors i
  * refine <fuel, tree, R, hdepth, havail, ?_>
    apply (token_of_restrictedInstrument D_0 j_0 realize tree R selectors i
      ? k (fun o => hk _) token).1
  rw [restrictedResult_eq_embed D_0 j_0 realize tree R selectors i k havail]
  at htoken
  exact htoken

```

```

* rw [restrictedResult_eq_bot D_0 j_0 realize tree R selectors i k havail]
  at htoken
have hfalse : False := by
  rw [ <- sSup_empty, RoundedTheory.mem_sSup] at htoken
  simp at htoken
  exact hfalse.elim
* rintro <fuel, tree, R, hdepth, havail, htoken>
refine <restrictedResult D_0 j_0 realize tree R selectors i k, ?_, ?_>
* exact <fuel, tree, R, hdepth, rfl>
* rw [restrictedResult_eq_embed D_0 j_0 realize tree R selectors i k havail]
  exact (token_of_restrictedInstrument D_0 j_0 realize tree R selectors i
    ? k (fun o => hk _) token).2 htoken

/-- Closed `recLam` tokens are finite channel-tree tokens: each
`iterateBot` stage is below the unique empty-stack tree. -/
theorem recLam_initial_presented_token_adequacy {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (self arg : Name) (body : Term (QubitPrimitive C))
  (hclosed : Closed (.recLam self arg body))
  (quantum : NormalizedDensity 2)
  (semanticEnv : Env (HSemanticValue D_0 j_0))
  (selectors : List Bool)
  (? : HSemanticValue D_0 j_0 -> FiniteInstrumentComp 2 PUnit.{1})
  (k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2))
  (hk : forall d, k d = (? d).satisfiedTTTheory resultCode)
  (i : Nat) (token : TTObservationToken 2) :
token in HardwareAdequacy.selectPath selectors
  (interp (hardwarePrimitive D_0 j_0 realize)
    (.recLam self arg body) semanticEnv) i k <->
exists fuel, exists (tree : ChannelTree C
  (initialChannelConfig (.recLam self arg body) quantum))
  (R : ChannelTreeRealization D_0 j_0 realize tree),
  tree.depth <= fuel /\
  ResultAvailable tree selectors i /\
  TTObservationToken.Holds resultCode token
  ((restrictedInstrument D_0 j_0 realize tree R selectors i).bind
    ?) :=
presented_channel_tree_token_adequacy_iff D_0 j_0 realize
  (initialChannelConfig (.recLam self arg body) quantum)
  (interp (hardwarePrimitive D_0 j_0 realize)
    (.recLam self arg body) semanticEnv)
  (recLam_initial_presentedChannelTreeCompleteness D_0 j_0 realize
    self arg body hclosed quantum semanticEnv)
  selectors ? k hk i token

theorem closed_app {Prim : Type} {fn arg : Term Prim}
  (h : Closed (.app fn arg)) : Closed fn /\ Closed arg := by
  simpa [Closed, free] using h

theorem closed_intern {Prim : Type} {left right : Term Prim}
  (h : Closed (.intern left right)) : Closed left /\ Closed right := by
  simpa [Closed, free] using h

theorem closed_extern {Prim : Type} {left right : Term Prim}
  (h : Closed (.extern left right)) : Closed left /\ Closed right := by
  simpa [Closed, free] using h

theorem closed_prob {Prim : Type} {p : Prob} {left right : Term Prim}
  (h : Closed (.prob p left right)) : Closed left /\ Closed right := by
  simpa [Closed, free] using h

```



```

/-- A well-scoped related empty-stack value is presented-complete: the
unique tree is the terminal leaf, and functionality identifies it with
the related denotation. -/
theorem terminal_presentedChannelTreeCompleteness {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} (hterminal : ChannelTerminal s)
  (hscoped : ChannelConfig.WellScoped s)
  {answer : HSemanticComp D_0 j_0}
  (hrel : ChannelConfigRel D_0 j_0 realize s answer) :
  PresentedChannelTreeCompleteness D_0 j_0 realize s answer where
selected_result_eq_channelTree_sup_presented := by
  intro selectors i ? k hk
  obtain <d, hd, _hanswer> := terminal_related D_0 j_0 hterminal hrel
  let R := terminalValueRealization D_0 j_0 hterminal hd
  have heq :=
    terminal_restrictedResult_eq D_0 j_0 hterminal hscoped hrel R
    selectors i k
  apply le_antisymm
  * rw [ <- heq ]
    apply le_sSup
    exact <0, ChannelTree.terminal hterminal, R, le_rfl, rfl>
  * apply sSup_le
    rintro T <_, tree, treeR, _, rfl>
    cases tree with
    | terminal hterm =>
      exact (terminal_channelTreePointwiseSound D_0 j_0 hterm hscoped
        hrel treeR).restricted_le_selected selectors i k
    | internal hstep next =>
      exact False.elim
        (ChannelInternalStep.not_value_nil hstep
          hterminal.control_eq hterminal.stack_eq)
    | external _ hex _ =>
      exact False.elim (ChannelExternalStep.not_value hex
        hterminal.control_eq)
    | probability _ _ _ =>
      cases hterminal.control_eq
    | probabilityZero _ =>
      cases hterminal.control_eq
    | probabilityOne _ =>
      cases hterminal.control_eq
    | measurement _ _ =>
      cases hterminal.control_eq

theorem closure_terminal_related {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} {x : Name}
  {body : Term (QubitPrimitive C)} {closureEnv : RuntimeEnv C}
  (hc : s.control = .value (.closure x body closureEnv))
  (hstack : s.stack = [])
  {semanticEnv : Env (HSemanticValue D_0 j_0)}
  (henv : EnvRel D_0 j_0 realize closureEnv semanticEnv) :
  ChannelConfigRel D_0 j_0 realize s
    (semanticUnit (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0)
      (lambdaValue (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0) x

```

```

      (interp (hardwarePrimitive D_0 j_0 realize) body)
      semanticEnv)) := by
refine <semanticUnit (Q := TTEExternalContinuationPower 2)
  (D_0 := D_0) (j_0 := j_0)
  (lambdaValue (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0) x
    (interp (hardwarePrimitive D_0 j_0 realize) body) semanticEnv),
  id, ?_, ?_, rfl>
* exact hc.symm |> ControlRel.value _ _ s.env
  (closure_created D_0 j_0 realize x body
    closureEnv semanticEnv henv)
* rw [hstack]
  exact StackRel.nil

theorem closure_terminal_presentedChannelTreeCompleteness {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} {x : Name}
  {body : Term (QubitPrimitive C)} {closureEnv : RuntimeEnv C}
  (hc : s.control = .value (.closure x body closureEnv))
  (hstack : s.stack = [])
  (hscoped : ChannelConfig.WellScoped s)
  {semanticEnv : Env (HSemanticValue D_0 j_0)}
  (henv : EnvRel D_0 j_0 realize closureEnv semanticEnv) :
PresentedChannelTreeCompleteness D_0 j_0 realize s
  (semanticUnit (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0)
    (lambdaValue (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0) x
      (interp (hardwarePrimitive D_0 j_0 realize) body)
      semanticEnv)) :=
terminal_presentedChannelTreeCompleteness D_0 j_0 realize
  <.closure x body closureEnv, hc, hstack> hscoped
  (closure_terminal_related D_0 j_0 realize hc hstack henv)

/-- Ordinary abstraction at an empty stack is the identity wrap of the
related closure. -/
theorem lam_terminal_presentedChannelTreeCompleteness {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} {x : Name}
  {body : Term (QubitPrimitive C)}
  (hc : s.control = .term (.lam x body))
  (hstack : s.stack = [])
  (hscoped : ChannelConfig.WellScoped s)
  {semanticEnv : Env (HSemanticValue D_0 j_0)}
  (henv : EnvRel D_0 j_0 realize s.env semanticEnv) :
PresentedChannelTreeCompleteness D_0 j_0 realize s
  (interp (hardwarePrimitive D_0 j_0 realize)
    (.lam x body) semanticEnv) := by
have hvalueScoped : RuntimeValue.WellScoped
  (.closure x body s.env) := by
  have hctl := hscoped.left
  rw [hc] at hctl
  exact RuntimeValue.WellScoped.closure x body s.env
  hctl.left fun y hy => hctl.right y hy
have henvScoped : RuntimeEnv.WellScoped s.env := by
  have hctl := hscoped.left
  rw [hc] at hctl

```

```

exact hctl.left
have hchild : PresentedChannelTreeCompleteness D_0 j_0 realize
  {s with control := .value (.closure x body s.env)}
  (semanticUnit (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0)
    (lambdaValue (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0) x
      (interp (hardwarePrimitive D_0 j_0 realize) body)
      semanticEnv)) :=
closure_terminal_presentedChannelTreeCompleteness D_0 j_0 realize
  (s := {s with control := .value (.closure x body s.env)})
  rfl hstack
  <<henvScoped, hvalueScoped>, hscoped.right>
  henv
let t : ChannelConfig C :=
  {s with control := .value (.closure x body s.env)}
have hstep : ChannelInternalStep s t := by
  have happ :
    ChannelInternalStep
      {s with control := .term (.lam x body)} t :=
    ChannelInternalStep.lambda (s := s) (x := x) (body := body)
  have hs : s = {s with control := .term (.lam x body)} :=
    ChannelConfig.ext hc rfl rfl rfl
  exact hs.symm |> happ
rw [interp_lam_apply]
exact identity_step_presentedChannelTreeCompleteness D_0 j_0 realize
  hstep (by simp [channelInternalOperation, hc])
  (fun h' => ChannelInternalStep.eq_of_lambda h' hc) hchild

/-- Internal choice of any two presented closed terms is the join of their
channel-tree suprema. -/
theorem intern_presentedChannelTreeCompleteness {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (left right : Term (QubitPrimitive C))
  (quantum : NormalizedDensity 2)
  (semanticEnv : Env (HSemanticValue D_0 j_0))
  (hleft : PresentedChannelTreeCompleteness D_0 j_0 realize
    (initialChannelConfig left quantum)
    (interp (hardwarePrimitive D_0 j_0 realize) left semanticEnv))
  (hright : PresentedChannelTreeCompleteness D_0 j_0 realize
    (initialChannelConfig right quantum)
    (interp (hardwarePrimitive D_0 j_0 realize) right semanticEnv)) :
PresentedChannelTreeCompleteness D_0 j_0 realize
  (initialChannelConfig (.intern left right) quantum)
  (interp (hardwarePrimitive D_0 j_0 realize) (.intern left right)
    semanticEnv) where
selected_result_eq_channelTree_sup_presented := by
  intro selectors i ? k hk
  rw [selectPath_intern,
    hleft.selected_result_eq_channelTree_sup_presented selectors i ? k hk,
    hright.selected_result_eq_channelTree_sup_presented selectors i ? k hk]
  refine le_antisymm ?_ ?_
  * apply sup_le
  * apply sSup_le
    rintro T <fuel, child, R, hdepth, rfl>
    apply le_sSup
    refine <fuel + 1,
      wrapInternLeft left right quantum child,
      wrapInternalRealization D_0 j_0 realize
      (ChannelInternalStep.internalLeft

```

```

      (s := initialChannelConfig (.intern left right) quantum)
      (left := left) (right := right))
    child R,
  ?_, ?_>
* simp [wrapInternLeft_depth] using Nat.succ_le_succ hdepth
* exact
  (restrictedResult_internal_of_identity D_0 j_0 realize
    (ChannelInternalStep.internalLeft
      (s := initialChannelConfig (.intern left right) quantum)
      (left := left) (right := right))
    (channelInternalOperation_intern left right quantum)
    child
      (wrapInternalRealization D_0 j_0 realize
        (ChannelInternalStep.internalLeft
          (s := initialChannelConfig (.intern left right) quantum)
          (left := left) (right := right))
        child R)
    selectors i k).symm
* apply sSup_le
rintro T <fuel, child, R, hdepth, rfl>
apply le_sSup
refine <fuel + 1,
  wrapInternRight left right quantum child,
  wrapInternalRealization D_0 j_0 realize
    (ChannelInternalStep.internalRight
      (s := initialChannelConfig (.intern left right) quantum)
      (left := left) (right := right))
  child R,
  ?_, ?_>
* simp [wrapInternRight_depth] using Nat.succ_le_succ hdepth
* exact
  (restrictedResult_internal_of_identity D_0 j_0 realize
    (ChannelInternalStep.internalRight
      (s := initialChannelConfig (.intern left right) quantum)
      (left := left) (right := right))
    (channelInternalOperation_intern left right quantum)
    child
      (wrapInternalRealization D_0 j_0 realize
        (ChannelInternalStep.internalRight
          (s := initialChannelConfig (.intern left right) quantum)

```

Lean 4 source (lines 2401–2800)

```

      (left := left) (right := right))
      child R)
      selectors i k).symm
* apply sSup_le
rintro T <_, tree, R, _, rfl>
have hctrl :
  (initialChannelConfig (.intern left right) quantum).control =
    .term (.intern left right) :=
  rfl
have hop := channelInternalOperation_intern left right quantum
cases tree with
| terminal hterm =>
  have := hterm.control_eq.symm.trans hctrl
  cases this
| @internal _ t h next =>
  rcases ChannelInternalStep.eq_of_intern h hctrl with ht | ht
* cases ht
  have := restrictedResult_internal_of_identity D_0 j_0 realize
    h hop next R selectors i k
  rw [this]
  apply le_sup_of_le_left

```

```

    apply le_sSup
    exact <next.depth,
      next,
      internalChildRealization D_0 j_0 realize h next R,
      le_rfl, rfl>
  * cases ht
  have := restrictedResult_internal_of_identity D_0 j_0 realize
    h hop next R selectors i k
  rw [this]
  apply le_sup_of_le_right
  apply le_sSup
  exact <next.depth,
    next,
    internalChildRealization D_0 j_0 realize h next R,
    le_rfl, rfl>
| external _ hex _ =>
  exact False.elim (ChannelExternalStep.not_intern hex hctrl)

/-- External choice of any two presented closed terms is the selected
child-tree supremum. -/
theorem extern_presentedChannelTreeCompleteness {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (left right : Term (QubitPrimitive C))
  (quantum : NormalizedDensity 2)
  (semanticEnv : Env (HSemanticValue D_0 j_0))
  (hleft : PresentedChannelTreeCompleteness D_0 j_0 realize
    (initialChannelConfig left quantum)
    (interp (hardwarePrimitive D_0 j_0 realize) left semanticEnv))
  (hright : PresentedChannelTreeCompleteness D_0 j_0 realize
    (initialChannelConfig right quantum)
    (interp (hardwarePrimitive D_0 j_0 realize) right semanticEnv)) :
  PresentedChannelTreeCompleteness D_0 j_0 realize
    (initialChannelConfig (.extern left right) quantum)
    (interp (hardwarePrimitive D_0 j_0 realize) (.extern left right)
      semanticEnv) where
selected_result_eq_channelTree_sup_presented := by
  intro selectors i ? k hk
  cases selectors with
  | cons b selectors =>
    rw [selectPath_extern_cons]
    cases b
    * simp only [Bool.false_eq_true, if_false]
    rw [hleft.selected_result_eq_channelTree_sup_presented
      selectors i ? k hk,
      external_cons_channelTreeSup]
    simp
    * simp only [if_true]
    rw [hright.selected_result_eq_channelTree_sup_presented
      selectors i ? k hk,
      external_cons_channelTreeSup]
    simp
  | nil =>
    cases i with
    | zero =>
      rw [HardwareAdequacy.selectPath_nil, interp_extern_apply,
        external_root_channelTreeSup]
      change (TTContinuation.externalChoice
        (interp (hardwarePrimitive D_0 j_0 realize) left semanticEnv,
          interp (hardwarePrimitive D_0 j_0 realize) right semanticEnv)
        0) k = False

```

```

    rw [TTContinuation.externalChoice_root_bot]
    exact ScottMap.bot_apply k
  | succ n =>
    by_cases heven : n % 2 = 0
    * have hi : n + 1 =
        HardwareAdequacy.branchCoordinate false (n / 2) := by
          simp [HardwareAdequacy.branchCoordinate]
          omega
      rw [hi, HardwareAdequacy.selectPath_nil,
          selectPath_extern_coordinate]
      simp only [Bool.false_eq_true, if_false]
      have hc :=
        hleft.selected_result_eq_channelTree_sup_presented
        [] (n / 2) ? k hk
      have hc' :
        interp (hardwarePrimitive D_0 j_0 realize) left semanticEnv
        (n / 2) k =
          sSup (channelTreeResults D_0 j_0 realize
            (initialChannelConfig left quantum) [] (n / 2) k) := by
            simpa using hc
      exact hc'.trans
        (external_coordinate_channelTreeSup D_0 j_0 realize left right
          quantum false (n / 2) k).symm
    * have hodd : n % 2 = 1 := by omega
      have hi : n + 1 =
        HardwareAdequacy.branchCoordinate true (n / 2) := by
          simp [HardwareAdequacy.branchCoordinate]
          omega
      rw [hi, HardwareAdequacy.selectPath_nil,
          selectPath_extern_coordinate]
      simp only [if_true]
      have hc :=
        hright.selected_result_eq_channelTree_sup_presented
        [] (n / 2) ? k hk
      have hc' :
        interp (hardwarePrimitive D_0 j_0 realize) right semanticEnv
        (n / 2) k =
          sSup (channelTreeResults D_0 j_0 realize
            (initialChannelConfig right quantum) [] (n / 2) k) := by
            simpa using hc
      exact hc'.trans
        (external_coordinate_channelTreeSup D_0 j_0 realize left right
          quantum true (n / 2) k).symm

/-- Endpoint completeness at weight zero, at a presented continuation. -/
theorem prob_zero_presentedChannelTreeCompleteness {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (left right : Term (QubitPrimitive C))
  (quantum : NormalizedDensity 2)
  (semanticEnv : Env (HSemanticValue D_0 j_0))
  (hright : PresentedChannelTreeCompleteness D_0 j_0 realize
    (initialChannelConfig right quantum)
    (interp (hardwarePrimitive D_0 j_0 realize) right semanticEnv)) :
  PresentedChannelTreeCompleteness D_0 j_0 realize
    (initialChannelConfig (.prob 0 left right) quantum)
    (interp (hardwarePrimitive D_0 j_0 realize) (.prob 0 left right)
      semanticEnv) where
  selected_result_eq_channelTree_sup_presented := by
    intro selectors i ? k hk
    have hright' :=

```

```

PresentedChannelTreeCompleteness.congr
  (show
    { initialChannelConfig (.prob 0 left right) quantum with
      control := .term right
      quantum := applyOperation
        (sourceProbabilityOperation 1 zero_le_one (le_refl 1))
        (initialChannelConfig (.prob 0 left right) quantum).quantum } =
      initialChannelConfig right quantum from
    ChannelConfig.ext rfl rfl rfl
    (applyOperation_sourceProbability_one_initial left right quantum)).symm
  rfl hright
rw [selectPath_prob_zero,
  hright'.selected_result_eq_channelTree_sup_presented
  selectors i ? k hk]
apply le_antisymm
* apply sSup_le
  rintro T <fuel, child, R, hdepth, rfl>
  apply le_sSup
  refine <fuel + 1, wrapProbZero left right quantum child,
    wrapProbabilityZeroRealization D_0 j_0 realize
    (s := initialChannelConfig (.prob 0 left right) quantum)
    (leftTerm := left) (rightTerm := right) child R, ?_, ?_>
* simp [wrapProbZero_depth] using Nat.succ_le_succ hdepth
* exact
  (restrictedResult_probabilityZero D_0 j_0 realize child
    (wrapProbabilityZeroRealization D_0 j_0 realize
      (s := initialChannelConfig (.prob 0 left right) quantum)
      (leftTerm := left) (rightTerm := right) child R)
    selectors i k).symm
* apply sSup_le
  rintro T <_, tree, R, _, rfl>
  have hle :=
    restrictedResult_of_control_prob_zero D_0 j_0 realize tree R rfl
    selectors i k
  exact hle

/-- Endpoint completeness at weight one, at a presented continuation. -/
theorem prob_one_presentedChannelTreeCompleteness {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (left right : Term (QubitPrimitive C))
  (quantum : NormalizedDensity 2)
  (semanticEnv : Env (HSemanticValue D_0 j_0))
  (hleft : PresentedChannelTreeCompleteness D_0 j_0 realize
    (initialChannelConfig left quantum)
    (interp (hardwarePrimitive D_0 j_0 realize) left semanticEnv)) :
PresentedChannelTreeCompleteness D_0 j_0 realize
  (initialChannelConfig (.prob 1 left right) quantum)
  (interp (hardwarePrimitive D_0 j_0 realize) (.prob 1 left right)
    semanticEnv) where
selected_result_eq_channelTree_sup_presented := by
  intro selectors i ? k hk
  have hleft' :=
    PresentedChannelTreeCompleteness.congr
      (show
        { initialChannelConfig (.prob 1 left right) quantum with
          control := .term left
          quantum := applyOperation
            (sourceProbabilityOperation 1 zero_le_one (le_refl 1))
            (initialChannelConfig (.prob 1 left right) quantum).quantum } =
          initialChannelConfig left quantum from

```

```

    ChannelConfig.ext rfl rfl rfl
    (by
      apply SubNormalizedDensity.ext
      rw [applyOperation_sourceProbability_one]
      rfl)).symm
  rfl hleft
rw [selectPath_prob_one,
  hleft'.selected_result_eq_channelTree_sup_presented
  selectors i ? k hk]
apply le_antisymm
* apply sSup_le
  rintro T <fuel, child, R, hdepth, rfl>
  apply le_sSup
  refine <fuel + 1, wrapProbOne left right quantum child,
    wrapProbabilityOneRealization D_0 j_0 realize
    (s := initialChannelConfig (.prob 1 left right) quantum)
    (leftTerm := left) (rightTerm := right) child R, ?_, ?_>
* simp [wrapProbOne_depth] using Nat.succ_le_succ hdepth
* exact
  (restrictedResult_probabilityOne D_0 j_0 realize child
    (wrapProbabilityOneRealization D_0 j_0 realize
      (s := initialChannelConfig (.prob 1 left right) quantum)
      (leftTerm := left) (rightTerm := right) child R)
    selectors i k).symm
* apply sSup_le
  rintro T <_, tree, R, _, rfl>
  have hle :=
    restrictedResult_of_control_prob_one D_0 j_0 realize tree R rfl
    selectors i k
  exact hle

theorem no_channelTree_of_invalid_prob {C : Type}
  {s : ChannelConfig C} (tree : ChannelTree C s)
  {p : ?} {left right : Term (QubitPrimitive C)}
  (hc : s.control = .term (.prob p left right))
  (hp : not (0 <= p /\ p <= 1)) : False := by
cases tree with
| terminal hterm =>
  have := hterm.control_eq.symm.trans hc
  cases this
| internal h _ =>
  exact False.elim (ChannelInternalStep.not_prob h hc)
| external _ h _ =>
  exact False.elim (ChannelExternalStep.not_prob h hc)
| @probability _ p' _ _ hp_0 hp_1 _ _ =>
  injection hc with hterm
  injection hterm with hp' _ _
  subst p
  exact hp <hp_0.le, hp_1.le>
| @probabilityZero _ _ _ _ =>
  injection hc with hterm
  injection hterm with hp0
  subst p
  exact hp <le_rfl, zero_le_one>
| @probabilityOne _ _ _ _ =>
  injection hc with hterm
  injection hterm with hp1
  subst p
  exact hp <zero_le_one, le_rfl>
| measurement _ _ =>
  cases hc

```

/-- Invalid weights have no physical trees and denote bottom. -/


```

theorem prob_invalid_presentedChannelTreeCompleteness {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (p : ?) (hp : not (0 <= p /\ p <= 1))
  (left right : Term (QubitPrimitive C))
  (quantum : NormalizedDensity 2)
  (semanticEnv : Env (HSemanticValue D_0 j_0)) :
  PresentedChannelTreeCompleteness D_0 j_0 realize
    (initialChannelConfig (.prob p left right) quantum)
    (interp (hardwarePrimitive D_0 j_0 realize) (.prob p left right)
      semanticEnv) where
selected_result_eq_channelTree_sup_presented := by
  intro selectors i ? k hk
  have hbot :
    HardwareAdequacy.selectPath selectors
      (interp (hardwarePrimitive D_0 j_0 realize) (.prob p left right)
        semanticEnv) i k = False := by
    rw [selectPath_prob, TTContinuation.probChoice_apply, dif_neg hp]
  rw [hbot]
  apply le_antisymm
  * exact bot_le
  * apply sSup_le
    rintro T <_, tree, R, _, rfl>
    exact False.elim
      (no_channelTree_of_invalid_prob tree rfl hp)

/-- A syntactically closed `lam` at a normalized start is
presented-complete. -/
theorem lam_initial_presentedChannelTreeCompleteness {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (x : Name) (body : Term (QubitPrimitive C))
  (hclosed : Closed (.lam x body))
  (quantum : NormalizedDensity 2)
  (semanticEnv : Env (HSemanticValue D_0 j_0)) :
  PresentedChannelTreeCompleteness D_0 j_0 realize
    (initialChannelConfig (.lam x body) quantum)
    (interp (hardwarePrimitive D_0 j_0 realize)
      (.lam x body) semanticEnv) :=
lam_terminal_presentedChannelTreeCompleteness D_0 j_0 realize
  rfl rfl (initialChannelConfig_wellScoped hclosed quantum)
  (env_nil D_0 j_0 realize semanticEnv)

/-- Interior probabilistic choice from presented children at the scaled
source-probability starts. -/
theorem prob_presented_of_presented_children {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (p : ?) (hp_0 : 0 < p) (hp_1 : p < 1)
  (left right : Term (QubitPrimitive C))
  (quantum : NormalizedDensity 2)
  (semanticEnv : Env (HSemanticValue D_0 j_0))
  (hleft : PresentedChannelTreeCompleteness D_0 j_0 realize
    (probLeftConfig p hp_0.le hp_1.le left right quantum)
    (interp (hardwarePrimitive D_0 j_0 realize) left semanticEnv))
  (hright : PresentedChannelTreeCompleteness D_0 j_0 realize
    (probRightConfig p hp_0.le hp_1.le left right quantum)

```

```

      (interp (hardwarePrimitive D_0 j_0 realize) right semanticEnv)) :
PresentedChannelTreeCompleteness D_0 j_0 realize
  (initialChannelConfig (.prob p left right) quantum)
  (interp (hardwarePrimitive D_0 j_0 realize) (.prob p left right)
    semanticEnv) where
selected_result_eq_channelTree_sup_presented := by
  intro selectors i ? k hk
  have hpI : 0 <= p /\ p <= 1 := <hp_0.le, hp_1.le>
  rw [selectPath_prob, TTContinuation.probChoice_apply, dif_pos hpI,
    hleft.selected_result_eq_channelTree_sup_presented selectors i ? k hk,
    hright.selected_result_eq_channelTree_sup_presented selectors i ? k hk]
  let SL :=
    channelTreeResults D_0 j_0 realize
    (probLeftConfig p hp_0.le hp_1.le left right quantum) selectors i k
  let SR :=
    channelTreeResults D_0 j_0 realize
    (probRightConfig p hp_0.le hp_1.le left right quantum) selectors i k
  refine le_antisymm ?_ ?_
  * by_cases hL : SL.Nonempty
  * by_cases hR : SR.Nonempty
    * rw [TTWeightedAggregation.weightedResultScott_sSup_product
      p hp_0.le hp_1.le SL SR hL hR]
      apply sSup_le
      rintro _ <<TL, TR>, <<fuelL, leftT, leftR, hdepthL, rfl>,
        <fuelR, rightT, rightR, hdepthR, rfl>>, rfl>
      apply le_sSup
      refine <max fuelL fuelR + 1,
        wrapProb hp_0 hp_1 left right quantum leftT rightT,
        wrapProbabilityRealization D_0 j_0 realize hp_0 hp_1 leftT rightT
          leftR rightR, ?_, ?_>
    * simp [wrapProb_depth]
      omega
    * exact
      (restrictedResult_probability_presented D_0 j_0 realize hp_0 hp_1
        leftT rightT
        (wrapProbabilityRealization D_0 j_0 realize hp_0 hp_1
          leftT rightT leftR rightR)
        selectors i ? k hk).symm
  * have hbot :
      TTWeightedAggregation.weightedResultScott p hp_0.le hp_1.le
      (sSup SL, sSup SR) = False := by
    have : sSup SR = False := by
      have hempty : SR = {} :=
        Set.not_nonempty_iff_eq_empty.mp hR
      rw [hempty, sSup_empty]
      rw [this, TTWeightedAggregation.weightedResultScott_bot_right
        p hp_0 hp_1]
      rw [hbot]
      exact bot_le
  * have hbot :
      TTWeightedAggregation.weightedResultScott p hp_0.le hp_1.le
      (sSup SL, sSup SR) = False := by
    have : sSup SL = False := by
      have hempty : SL = {} :=
        Set.not_nonempty_iff_eq_empty.mp hL
      rw [hempty, sSup_empty]
      rw [this, TTWeightedAggregation.weightedResultScott_bot_left
        p hp_0 hp_1]
      rw [hbot]
      exact bot_le
  * apply sSup_le
  rintro T <_, tree, R, _, rfl>
  have hle :=

```

```
restrictedResult_of_control_prob_presented D_0 j_0 realize tree R
```

Lean 4 source (lines 2801–2823)

```

    hp_0 hp_1 rfl selectors i ? k hk
  have hL :
    { initialChannelConfig (.prob p left right) quantum with
      control := .term left
      quantum := applyOperation
        (sourceProbabilityOperation p hp_0.le hp_1.le)
        (initialChannelConfig (.prob p left right) quantum).quantum } =
    probLeftConfig p hp_0.le hp_1.le left right quantum := by
    apply ChannelConfig.ext <;> rfl
  have hR :
    { initialChannelConfig (.prob p left right) quantum with
      control := .term right
      quantum := applyOperation
        (sourceProbabilityOperation (1 - p)
          (sub_nonneg.mpr hp_1.le) (by linarith))
        (initialChannelConfig (.prob p left right) quantum).quantum } =
    probRightConfig p hp_0.le hp_1.le left right quantum := by
    apply ChannelConfig.ext <;> rfl
  simp [hL, hR] using hle

end HardwareChannelSemantics
end QLambda

```

A.24 QLambda/HardwareChannel/Productive.lean

1744 lines.

Lean 4 source (lines 1–400)

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/
import QLambda.HardwareChannel.Fundamental

/-!
# Productive closed applications

Layer of the hardware channel-tree semantics. All layers share the
`QLambda.HardwareChannelSemantics` namespace; import
`QLambda.HardwareChannelSemantics` for the full module.

`Atomic` is the application-free productive class (return, measure-Z,
lambda / recursive lambda as values, probability, variables, internal
choice). `Productive n` raises arity through lambda / recursive lambda
and consumes one leftover argument when the argument is `Productive 0`.
That includes leftover-arity spines
(`app (app (lam (lam *))) *`) and application-as-argument.

This is the class for which a `PathChannelEvaluation` is assembled
without a `FunAppFrag` / `Produces` hypothesis. Measure-Z, probability,
and intern-in-body are included; those fragments exclude measure-Z and
probability. Pauli-X is omitted (`pauliX` is a path constructor only at
the empty stack). External choice as an argument changes the active
coordinate, so it is not represented by that path certificate.
`RestrictedExternApplication` and `ProductiveClosedCase` add the proved
ordinary / recursive lambda cases by a direct completeness argument
under explicit `NoApp`, `AdminNoApp`, and `Atomic` hypotheses.

```

```

-/

set_option maxHeartbeats 800000

namespace QLambda
namespace HardwareChannelSemantics

open Matrix
open scoped ComplexOrder MatrixOrder

open HardwareOperational
open HardwareObservation
open HardwareAdequacy
open HardwareLogicalRelation
open TTPhysicalPrimitives
open TTPhysicalEmbedding
open TTContinuation
open Scott1972.ContinuousLattice

/#!/ ## Syntactic productivity -/

/-- Every measure-Z primitive in the term has distinct realizations. -/
def MeasureDistinct {C : Type}
  {D_0 : QDomain.{0}}
  {j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEnternalContinuationPower 2)) D_0.carrier)}
  (realize : C -> HSemanticValue D_0 j_0) :
  Term (QubitPrimitive C) -> Prop
| .prim (.measureZ z o) => realize z != realize o
| .app fn arg => MeasureDistinct realize fn /\ MeasureDistinct realize arg
| .lam _ body => MeasureDistinct realize body
| .recLam _ _ body => MeasureDistinct realize body
| .prob _ left right =>
  MeasureDistinct realize left /\ MeasureDistinct realize right
| .intern left right =>
  MeasureDistinct realize left /\ MeasureDistinct realize right
| .extern left right =>
  MeasureDistinct realize left /\ MeasureDistinct realize right
| .var _ => True
| .prim (.ret _) => True
| .prim (.pauliX _) => True

/-- Application-free terms that a path evaluation can run at the empty
stack or as a leftover argument. -/
inductive Atomic {C : Type} : Term (QubitPrimitive C) -> Prop
| var (x : Name) : Atomic (.var x)
| ret (value : C) : Atomic (.prim (.ret value))
| measureZ (zeroValue oneValue : C) :
  Atomic (.prim (.measureZ zeroValue oneValue))
| lam (x : Name) (body : Term (QubitPrimitive C)) :
  Atomic (.lam x body)
| recLam (self x : Name) (body : Term (QubitPrimitive C)) :
  Atomic (.recLam self x body)
| intern (left right : Term (QubitPrimitive C)) :
  Atomic left ->
  Atomic right ->
  Atomic (.intern left right)
| prob (p : ?) (left right : Term (QubitPrimitive C)) :
  0 <= p ->
  p <= 1 ->
  Atomic left ->
  Atomic right ->
  Atomic (.prob p left right)

```

```

/-- Terms that absorb exactly `n` leftover `Productive 0` argument frames.
`Productive 0` is `Atomic`, or an application of a `Productive 1`
function to a `Productive 0` argument. -/
inductive Productive {C : Type} : Nat -> Term (QubitPrimitive C) -> Prop
| atomic {t : Term (QubitPrimitive C)} :
  Atomic t -> Productive 0 t
| lam (n : Nat) (x : Name) (body : Term (QubitPrimitive C)) :
  Productive n body -> Productive (n + 1) (.lam x body)
| recLam (n : Nat) (self x : Name) (body : Term (QubitPrimitive C)) :
  Productive n body -> Productive (n + 1) (.recLam self x body)
| app (n : Nat) (fn arg : Term (QubitPrimitive C)) :
  Productive (n + 1) fn ->
  Atomic arg ->
  Productive n (.app fn arg)

theorem covers_var {C : Type} {env : RuntimeEnv C} {x : Name}
  (h : RuntimeEnv.Covers env (.var x)) :
  exists v, RuntimeEnv.lookup x env = some v :=
  h x (by simp [free])

theorem initialChannelConfig_control {C : Type}
  (code : Term (QubitPrimitive C)) (quantum : NormalizedDensity 2) :
  (initialChannelConfig code quantum).control = .term code :=
  rfl

theorem initialChannelConfig_stack {C : Type}
  (code : Term (QubitPrimitive C)) (quantum : NormalizedDensity 2) :
  (initialChannelConfig code quantum).stack = [] :=
  rfl

/-! ## Atomic terms at the empty stack -/

/-- An `Atomic` term at the empty stack has a branch-complete path
evaluation at every coordinate. -/
theorem atomic_nil_pathChannelEvaluation {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} {code : Term (QubitPrimitive C)}
  (hatom : Atomic code)
  (hdist : MeasureDistinct realize code)
  (hc : s.control = .term code)
  (hs : s.stack = [])
  (hscoped : ChannelConfig.WellScoped s)
  (active : Nat) :
  PathChannelEvaluation D_0 j_0 realize s active [] := by
induction hatom generalizing s active with
| var x =>
  have hx : s.control = .term (.var x) := hc
  have <hctl, _> := hscoped
  rw [hx] at hctl
  obtain <v, hlookup> := covers_var hctl.right
  refine PathChannelEvaluation.varLookup hx hlookup ?_
  exact PathChannelEvaluation.terminal <v, rfl, hs>
| ret value =>
  have hx : s.control = .term (.prim (.ret value)) := hc
  refine PathChannelEvaluation.returnPayload hx ?_
  exact PathChannelEvaluation.terminal <.payload value, rfl, hs>
| measureZ zeroValue oneValue =>
  have hx : s.control =
    .term (.prim (.measureZ zeroValue oneValue)) := hc

```

```

    refine PathChannelEvaluation.measurement hx hdist ?_ ?_
    * exact PathChannelEvaluation.terminal <.payload zeroValue, rfl, hs>
    * exact PathChannelEvaluation.terminal <.payload oneValue, rfl, hs>
| lam x body =>
  have hx : s.control = .term (.lam x body) := hc
  refine PathChannelEvaluation.lambda hx ?_
  exact PathChannelEvaluation.terminal
    <.closure x body s.env, rfl, hs>
| recLam self x body =>
  have hx : s.control = .term (.recLam self x body) := hc
  refine PathChannelEvaluation.recursive hx ?_
  exact PathChannelEvaluation.terminal
    <.recClosure self x body s.env, rfl, hs>
| intern left right hleft hright ihL ihR =>
  have hx : s.control = .term (.intern left right) := hc
  have <hdistL, hdistR> := hdist
  refine PathChannelEvaluation.intern hx ?_ ?_
  * exact ihL (s := {s with control := .term left}) hdistL rfl hs
    (wellScoped_intern_left hx hscoped) active
  * exact ihR (s := {s with control := .term right}) hdistR rfl hs
    (wellScoped_intern_right hx hscoped) active
| prob p left right hp_0 hp_1 hleft hright ihL ihR =>
  have hx : s.control = .term (.prob p left right) := hc
  have <hdistL, hdistR> := hdist
  by_cases hz : p = 0
  * subst hz
    refine PathChannelEvaluation.probZero hx ?_
    exact ihR (s :=
      {s with
        control := .term right
        quantum :=
          applyOperation
            (sourceProbabilityOperation 1 zero_le_one (le_refl 1))
            s.quantum})
    hdistR rfl hs (wellScoped_prob_right hx hscoped _) active
  * by_cases ho : p = 1
    * subst ho
      refine PathChannelEvaluation.probOne hx ?_
      exact ihL (s :=
        {s with
          control := .term left
          quantum :=
            applyOperation
              (sourceProbabilityOperation 1 zero_le_one (le_refl 1))
              s.quantum})
      hdistL rfl hs (wellScoped_prob_left hx hscoped _) active
  * have hp0' : 0 < p := lt_of_le_of_ne hp_0 (Ne.symm hz)
    have hp1' : p < 1 := lt_of_le_of_ne hp_1 ho
    refine PathChannelEvaluation.probability hp0' hp1' hx ?_ ?_
    * exact ihL (s :=
      {s with
        control := .term left
        quantum :=
          applyOperation
            (sourceProbabilityOperation p hp0'.le hp1'.le)
            s.quantum})
    hdistL rfl hs (wellScoped_prob_left hx hscoped _) active
  * exact ihR (s :=
    {s with
      control := .term right
      quantum :=
        applyOperation
          (sourceProbabilityOperation (1 - p))

```

```

        (sub_nonneg.mpr hp1'.le) (by linarith))
      s.quantum})
    hdistR rfl hs (wellScoped_prob_right hx hscoped _) active

/--! ## Atomic argument under one closure, then the body at the empty stack -/

/-- An `Atomic` argument under a single ordinary closure frame evaluates
and betas into an empty-stack `Atomic` (or `Productive 0` via `atomic`)
body. -/
theorem atomic_under_closure_pathChannelEvaluation {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} {arg : Term (QubitPrimitive C)}
  {x : Name} {body : Term (QubitPrimitive C)} {cloEnv : RuntimeEnv C}
  (hatom : Atomic arg)
  (hdistArg : MeasureDistinct realize arg)
  (hbody : Atomic body)
  (hdistBody : MeasureDistinct realize body)
  (hc : s.control = .term arg)
  (hs : s.stack = [.function (.closure x body cloEnv)])
  (hscoped : ChannelConfig.WellScoped s)
  (active : Nat) :
  PathChannelEvaluation D_0 j_0 realize s active
  [(function (.closure x body cloEnv), active)] := by
induction hatom generalizing s active with
| var y =>
  have hx : s.control = .term (.var y) := hc
  have <hctl, _> := hscoped
  rw [hx] at hctl
  obtain <v, hlookup> := covers_var hctl.right
  refine PathChannelEvaluation.varLookup hx hlookup ?_
  refine PathChannelEvaluation.beta rfl hs ?_
  exact atomic_nil_pathChannelEvaluation D_0 j_0 realize hbody hdistBody
    rfl rfl
    ((channelInternalStep_of_beta (s := {s with control := .value v})
      rfl hs).preserve_wellScoped
      ((channelInternalStep_of_variable hx hlookup).preserve_wellScoped
        hscoped))
    active
| ret value =>
  have hx : s.control = .term (.prim (.ret value)) := hc
  refine PathChannelEvaluation.returnPayload hx ?_
  refine PathChannelEvaluation.beta rfl hs ?_
  exact atomic_nil_pathChannelEvaluation D_0 j_0 realize hbody hdistBody
    rfl rfl
    ((channelInternalStep_of_beta
      (s := {s with control := .value (.payload value)})
      rfl hs).preserve_wellScoped
      ((channelInternalStep_of_return hx).preserve_wellScoped hscoped))
    active
| measureZ zeroValue oneValue =>
  have hx : s.control =
    .term (.prim (.measureZ zeroValue oneValue)) := hc
  refine PathChannelEvaluation.measurement hx hdistArg ?_ ?_
  * refine PathChannelEvaluation.beta rfl hs ?_
  exact atomic_nil_pathChannelEvaluation D_0 j_0 realize hbody
    hdistBody rfl rfl
    ((channelInternalStep_of_beta
      (s :=
        {s with
          control := .value (.payload zeroValue)

```

```

        quantum :=
          applyOperation (measurementOperation false) s.quantum})
      rfl hs).preserve_wellScoped
      (wellScoped_payload_child hx hscoped zeroValue _))
    active
  * refine PathChannelEvaluation.beta rfl hs ?_
  exact atomic_nil_pathChannelEvaluation D_0 j_0 realize hbody
  hdistBody rfl rfl
  ((channelInternalStep_of_beta
    (s :=
      {s with
        control := .value (.payload oneValue)
        quantum :=
          applyOperation (measurementOperation true) s.quantum})
    rfl hs).preserve_wellScoped
    (wellScoped_payload_child hx hscoped oneValue _))
  active
| lam z b =>
  have hx : s.control = .term (.lam z b) := hc
  refine PathChannelEvaluation.lambda hx ?_
  refine PathChannelEvaluation.beta rfl hs ?_
  exact atomic_nil_pathChannelEvaluation D_0 j_0 realize hbody hdistBody
  rfl rfl
  ((channelInternalStep_of_beta
    (s := {s with control := .value (.closure z b s.env)}))
    rfl hs).preserve_wellScoped
    ((channelInternalStep_of_lambda hx).preserve_wellScoped hscoped))
  active
| recLam self z b =>
  have hx : s.control = .term (.recLam self z b) := hc
  refine PathChannelEvaluation.recursive hx ?_
  refine PathChannelEvaluation.beta rfl hs ?_
  exact atomic_nil_pathChannelEvaluation D_0 j_0 realize hbody hdistBody
  rfl rfl
  ((channelInternalStep_of_beta
    (s :=
      {s with control := .value (.recClosure self z b s.env)}))
    rfl hs).preserve_wellScoped
    ((channelInternalStep_of_recursive hx).preserve_wellScoped
      hscoped))
  active
| intern left right hleft hright ihL ihR =>
  have hx : s.control = .term (.intern left right) := hc
  have <hdistL, hdistR> := hdistArg
  refine PathChannelEvaluation.intern hx ?_ ?_
  * exact ihL (s := {s with control := .term left}) hdistL rfl hs
    (wellScoped_intern_left hx hscoped) active
  * exact ihR (s := {s with control := .term right}) hdistR rfl hs
    (wellScoped_intern_right hx hscoped) active
| prob p left right hp_0 hp_1 hleft hright ihL ihR =>
  have hx : s.control = .term (.prob p left right) := hc
  have <hdistL, hdistR> := hdistArg
  by_cases hz : p = 0
  * subst hz
  refine PathChannelEvaluation.probZero hx ?_
  exact ihR (s :=
    {s with
      control := .term right
      quantum :=
        applyOperation
          (sourceProbabilityOperation 1 zero_le_one (le_refl 1))
          s.quantum})
  hdistR rfl hs (wellScoped_prob_right hx hscoped _) active

```



```

* by_cases ho : p = 1
* subst ho
  refine PathChannelEvaluation.probOne hx ?_
  exact ihL (s :=
    {s with
      control := .term left
      quantum :=
        applyOperation
          (sourceProbabilityOperation 1 zero_le_one (le_refl 1))
          s.quantum})
    hdistL rfl hs (wellScoped_prob_left hx hscoped _) active
* have hp0' : 0 < p := lt_of_le_of_ne hp_0 (Ne.symm hz)
  have hp1' : p < 1 := lt_of_le_of_ne hp_1 ho
  refine PathChannelEvaluation.probability hp0' hp1' hx ?_ ?_
* exact ihL (s :=
  {s with
    control := .term left
    quantum :=
      applyOperation
        (sourceProbabilityOperation p hp0'.le hp1'.le)
        s.quantum})
    hdistL rfl hs (wellScoped_prob_left hx hscoped _) active
* exact ihR (s :=
  {s with
    control := .term right
    quantum :=
      applyOperation
        (sourceProbabilityOperation (1 - p)
          (sub_nonneg.mpr hp1'.le) (by linarith))
        s.quantum})
    hdistR rfl hs (wellScoped_prob_right hx hscoped _) active

/-- The same as `atomic_under_closure_pathChannelEvaluation` for a
recursive closure frame. -/
theorem atomic_under_recClosure_pathChannelEvaluation {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C → HSemanticValue D_0 j_0)
  {s : ChannelConfig C} {arg : Term (QubitPrimitive C)}
  {self x : Name} {body : Term (QubitPrimitive C)}
  {cloEnv : RuntimeEnv C}
  (hatom : Atomic arg)
  (hdistArg : MeasureDistinct realize arg)
  (hbody : Atomic body)
  (hdistBody : MeasureDistinct realize body)
  (hc : s.control = .term arg)
  (hs : s.stack = [.function (.recClosure self x body cloEnv)])
  (hscoped : ChannelConfig.WellScoped s)
  (active : Nat) :
  PathChannelEvaluation D_0 j_0 realize s active
  [(.function (.recClosure self x body cloEnv), active)] := by
  induction hatom generalizing s active with
  | var y =>
    have hx : s.control = .term (.var y) := hc

```

Lean 4 source (lines 401–800)

```

have <hctl, _> := hscoped
rw [hx] at hctl
obtain <v, hlookup> := covers_var hctl.right
refine PathChannelEvaluation.varLookup hx hlookup ?_
refine PathChannelEvaluation.recBeta rfl hs ?_
exact atomic_nil_pathChannelEvaluation D_0 j_0 realize hbody hdistBody

```

```

    rfl rfl
    ((channelInternalStep_of_recBeta
      (s := {s with control := .value v}))
      rfl hs).preserve_wellScoped
    ((channelInternalStep_of_variable hx hlookup).preserve_wellScoped
      hscoped))
  active
| ret value =>
  have hx : s.control = .term (.prim (.ret value)) := hc
  refine PathChannelEvaluation.returnPayload hx ?_
  refine PathChannelEvaluation.recBeta rfl hs ?_
  exact atomic_nil_pathChannelEvaluation D_0 j_0 realize hbody hdistBody
  rfl rfl
  ((channelInternalStep_of_recBeta
    (s := {s with control := .value (.payload value)}))
    rfl hs).preserve_wellScoped
  ((channelInternalStep_of_return hx).preserve_wellScoped hscoped))
  active
| measureZ zeroValue oneValue =>
  have hx : s.control =
    .term (.prim (.measureZ zeroValue oneValue)) := hc
  refine PathChannelEvaluation.measurement hx hdistArg ?_ ?_
  * refine PathChannelEvaluation.recBeta rfl hs ?_
  exact atomic_nil_pathChannelEvaluation D_0 j_0 realize hbody
    hdistBody rfl rfl
  ((channelInternalStep_of_recBeta
    (s :=
      {s with
        control := .value (.payload zeroValue)
        quantum :=
          applyOperation (measurementOperation false) s.quantum})
    rfl hs).preserve_wellScoped
    (wellScoped_payload_child hx hscoped zeroValue _))
  active
  * refine PathChannelEvaluation.recBeta rfl hs ?_
  exact atomic_nil_pathChannelEvaluation D_0 j_0 realize hbody
    hdistBody rfl rfl
  ((channelInternalStep_of_recBeta
    (s :=
      {s with
        control := .value (.payload oneValue)
        quantum :=
          applyOperation (measurementOperation true) s.quantum})
    rfl hs).preserve_wellScoped
    (wellScoped_payload_child hx hscoped oneValue _))
  active
| lam z b =>
  have hx : s.control = .term (.lam z b) := hc
  refine PathChannelEvaluation.lambda hx ?_
  refine PathChannelEvaluation.recBeta rfl hs ?_
  exact atomic_nil_pathChannelEvaluation D_0 j_0 realize hbody hdistBody
    rfl rfl
  ((channelInternalStep_of_recBeta
    (s := {s with control := .value (.closure z b s.env)}))
    rfl hs).preserve_wellScoped
  ((channelInternalStep_of_lambda hx).preserve_wellScoped hscoped))
  active
| recLam self' z b =>
  have hx : s.control = .term (.recLam self' z b) := hc
  refine PathChannelEvaluation.recursive hx ?_
  refine PathChannelEvaluation.recBeta rfl hs ?_
  exact atomic_nil_pathChannelEvaluation D_0 j_0 realize hbody hdistBody
    rfl rfl

```

```

((channelInternalStep_of_recBeta
  (s :=
    {s with control := .value (.recClosure self' z b s.env)})
  rfl hs).preserve_wellScoped
  ((channelInternalStep_of_recursive hx).preserve_wellScoped
    hscoped))
  active
| intern left right hleft hright ihL ihR =>
  have hx : s.control = .term (.intern left right) := hc
  have <hdistL, hdistR> := hdistArg
  refine PathChannelEvaluation.intern hx ?_ ?_
  * exact ihL (s := {s with control := .term left}) hdistL rfl hs
    (wellScoped_intern_left hx hscoped) active
  * exact ihR (s := {s with control := .term right}) hdistR rfl hs
    (wellScoped_intern_right hx hscoped) active
| prob p left right hp_0 hp_1 hleft hright ihL ihR =>
  have hx : s.control = .term (.prob p left right) := hc
  have <hdistL, hdistR> := hdistArg
  by_cases hz : p = 0
  * subst hz
    refine PathChannelEvaluation.probZero hx ?_
    exact ihR (s :=
      {s with
        control := .term right
        quantum :=
          applyOperation
            (sourceProbabilityOperation 1 zero_le_one (le_refl 1))
            s.quantum})
      hdistR rfl hs (wellScoped_prob_right hx hscoped _) active
  * by_cases ho : p = 1
    * subst ho
      refine PathChannelEvaluation.probOne hx ?_
      exact ihL (s :=
        {s with
          control := .term left
          quantum :=
            applyOperation
              (sourceProbabilityOperation 1 zero_le_one (le_refl 1))
              s.quantum})
        hdistL rfl hs (wellScoped_prob_left hx hscoped _) active
  * have hp0' : 0 < p := lt_of_le_of_ne hp_0 (Ne.symm hz)
    have hp1' : p < 1 := lt_of_le_of_ne hp_1 ho
    refine PathChannelEvaluation.probability hp0' hp1' hx ?_ ?_
  * exact ihL (s :=
    {s with
      control := .term left
      quantum :=
        applyOperation
          (sourceProbabilityOperation p hp0'.le hp1'.le)
          s.quantum})
    hdistL rfl hs (wellScoped_prob_left hx hscoped _) active
  * exact ihR (s :=
    {s with
      control := .term right
      quantum :=
        applyOperation
          (sourceProbabilityOperation (1 - p)
            (sub_nonneg.mpr hp1'.le) (by linarith))
          s.quantum})
    hdistR rfl hs (wellScoped_prob_right hx hscoped _) active

/-! ## Closed `app (lam / recLam) arg` with an atomic argument -/

```

```

/-- Closed `app (recLam self x body) (extern left right)` at the sound
coordinate-constant boundary. Both external children are administrative
NoApp, so each selected branch can rec-beta and finish the body. -/
theorem closed_recLam_extern_admin_noapp_presented_channelTreeCompleteness
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (self x : Name) (body left right : Term (QubitPrimitive C))
  (hclosed :
    Closed (.app (.recLam self x body) (.extern left right)))
  (hnoapp : NoApp body) (hadminBody : AdminNoApp body)
  (hadminL : AdminNoApp left) (hadminR : AdminNoApp right)
  (quantum : NormalizedDensity 2)
  (semanticEnv : Env (HSemanticValue D_0 j_0)) :
  PresentedChannelTreeCompleteness D_0 j_0 realize
    (initialChannelConfig
      (.app (.recLam self x body) (.extern left right)) quantum)
    (interp (hardwarePrimitive D_0 j_0 realize)
      (.app (.recLam self x body) (.extern left right)) semanticEnv) := by
let code : Term (QubitPrimitive C) :=
  .app (.recLam self x body) (.extern left right)
let s : ChannelConfig C := initialChannelConfig code quantum
have hc : s.control = .term code := rfl
have hrel :=
  initialChannelConfig_related D_0 j_0 realize code quantum semanticEnv
have hscoped := initialChannelConfig_wellScoped hclosed quantum
have hsApp :
  {s with
    control :=
      .term (.app (.recLam self x body) (.extern left right))} =
  s :=
  ChannelConfig.ext hc.symm rfl rfl rfl
have hrelApp : ChannelConfigRel D_0 j_0 realize
  {s with
    control :=
      .term (.app (.recLam self x body) (.extern left right))}
  (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv) :=
  hsApp.symm |> hrel
have hrelRec :=
  channel_config_application D_0 j_0 (s := s)
  (fn := .recLam self x body) (arg := .extern left right) hrelApp
have hrelClo :=
  channel_config_recursive D_0 j_0
  (s :=
    {s with
      stack := .argument (.extern left right) s.env :: s.stack})
  hrelRec
have hrelArg :=
  channel_config_evaluateArgument D_0 j_0
  (s :=
    {s with
      control := .value (.recClosure self x body s.env)
      stack := .argument (.extern left right) s.env :: s.stack})
  (fn := .recClosure self x body s.env) (arg := .extern left right)
  (callEnv := s.env) (rest := s.stack) hrelClo
let sArg : ChannelConfig C :=
  {s with
    control := .term (.extern left right)
    stack := .function (.recClosure self x body s.env) :: s.stack}
have hstepApp : ChannelInternalStep s
  {s with

```

```

    control := .term (.recLam self x body)
    stack := .argument (.extern left right) s.env :: s.stack} := by
have happ :
  ChannelInternalStep
  {s with
    control :=
      .term (.app (.recLam self x body) (.extern left right)))}
  {s with
    control := .term (.recLam self x body)
    stack := .argument (.extern left right) s.env :: s.stack} :=
  ChannelInternalStep.application (s := s)
  (fn := .recLam self x body) (arg := .extern left right)
exact hsApp.symm |> happ
have hstepRec : ChannelInternalStep
  {s with
    control := .term (.recLam self x body)
    stack := .argument (.extern left right) s.env :: s.stack}
  {s with
    control := .value (.recClosure self x body s.env)
    stack := .argument (.extern left right) s.env :: s.stack} :=
  ChannelInternalStep.recursive
  (s :=
    {s with
      stack := .argument (.extern left right) s.env :: s.stack})
  (self := self) (arg := x) (body := body)
have hstepArg : ChannelInternalStep
  {s with
    control := .value (.recClosure self x body s.env)
    stack := .argument (.extern left right) s.env :: s.stack}
  sArg :=
  ChannelInternalStep.evaluateArgument
  (s :=
    {s with
      control := .value (.recClosure self x body s.env)
      stack := .argument (.extern left right) s.env :: s.stack})
  (fn := .recClosure self x body s.env) (arg := .extern left right)
  (callEnv := s.env) (rest := s.stack)
have hscopedArg : ChannelConfig.WellScoped sArg :=
  hstepArg.preserve_wellScoped
  (hstepRec.preserve_wellScoped (hstepApp.preserve_wellScoped hscoped))
have hsArg :
  sArg.stack = [.function (.recClosure self x body s.env)] := by
  simp [sArg, s, initialChannelConfig, ofConfig, initialConfig]
have hscopedL : ChannelConfig.WellScoped
  {sArg with control := .term left} :=
  wellScoped_term_child (s := sArg) (code := .extern left right)
  (child := left) rfl hscopedArg fun z hz => by simp [free, hz]
have hscopedR : ChannelConfig.WellScoped
  {sArg with control := .term right} :=
  wellScoped_term_child (s := sArg) (code := .extern left right)
  (child := right) rfl hscopedArg fun z hz => by simp [free, hz]
have harg :
  PresentedChannelConfigCompleteness D_0 j_0 realize sArg
  (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv) :=
  extern_under_recClosure_nil_presentedChannelConfigCompleteness
  D_0 j_0 realize (s := sArg) (left := left) (right := right)
  (self := self) (x := x) (body := body) (cloEnv := s.env)
  rfl hsArg hadminBody
  (by
    change ChannelConfigRel D_0 j_0 realize
    {s with
      control := .term (.extern left right)
      env := s.env

```

```

      stack :=
        .function (.recClosure self x body s.env) :: s.stack}

    -
    exact hrelArg)
  (fun childEnv childK henv hstack =>
    admin_noapp_under_recClosure_nil_presentedChannelConfigCompleteness
      D_0 j_0 realize (s := {sArg with control := .term left})
      (code := left) (self := self) (x := x) (body := body)
      (cloEnv := s.env) hadminL rfl hsArg hnoapp hscopedL
      <interp (hardwarePrimitive D_0 j_0 realize) left childEnv,
        childK, ControlRel.term left sArg.env childEnv henv,
        hstack, rfl>)
  (fun childEnv childK henv hstack =>
    admin_noapp_under_recClosure_nil_presentedChannelConfigCompleteness
      D_0 j_0 realize (s := {sArg with control := .term right})
      (code := right) (self := self) (x := x) (body := body)
      (cloEnv := s.env) hadminR rfl hsArg hnoapp hscopedR
      <interp (hardwarePrimitive D_0 j_0 realize) right childEnv,
        childK, ControlRel.term right sArg.env childEnv henv,
        hstack, rfl>)
  exact (stacked_recLam_app_presentedChannelConfigCompleteness
    D_0 j_0 realize (s := s) (self := self) (x := x) (body := body)
    (arg := .extern left right) hc hrel harg).complete

/-- Path evaluation of `app (lam x body) arg` at the empty stack when
the body and argument are atomic. -/
theorem app_lam_atomic_nil_pathChannelEvaluation {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} {x : Name}
  {body arg : Term (QubitPrimitive C)}
  (hbody : Atomic body)
  (harg : Atomic arg)
  (hdist : MeasureDistinct realize (.app (.lam x body) arg))
  (hc : s.control = .term (.app (.lam x body) arg))
  (hs : s.stack = [])
  (hscoped : ChannelConfig.WellScoped s)
  (active : Nat) :
  PathChannelEvaluation D_0 j_0 realize s active [] := by
  have <hdistFn, hdistArg> := hdist
  have hdistBody : MeasureDistinct realize body := hdistFn
  let sFn : ChannelConfig C :=
    {s with
      control := .term (.lam x body)
      stack := .argument arg s.env :: s.stack}
  let sClo : ChannelConfig C :=
    {s with
      control := .value (.closure x body s.env)
      stack := .argument arg s.env :: s.stack}
  let sArg : ChannelConfig C :=
    {s with
      control := .term arg
      env := s.env
      stack := .function (.closure x body s.env) :: s.stack}
  refine PathChannelEvaluation.application hc ?_
  refine PathChannelEvaluation.lambda (s := sFn) rfl ?_
  refine PathChannelEvaluation.evaluateArgument (s := sClo) rfl rfl ?_
  exact atomic_under_closure_pathChannelEvaluation D_0 j_0 realize
    (s := sArg) harg hdistArg hbody hdistBody rfl (by simp [sArg, hs])
    ((channelInternalStep_of_evaluateArgument (s := sClo) rfl
      rfl).preserve_wellScoped

```

```

      ((channelInternalStep_of_lambda (s := sFn) rfl).preserve_wellScoped
        ((channelInternalStep_of_application hc).preserve_wellScoped
          hscoped)))
    active

/-- Path evaluation of `app (recLam self x body) arg` at the empty stack
when the body and argument are atomic. -/
theorem app_recLam_atomic_nil_pathChannelEvaluation {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} {self x : Name}
  {body arg : Term (QubitPrimitive C)}
  (hbody : Atomic body)
  (harg : Atomic arg)
  (hdist : MeasureDistinct realize (.app (.recLam self x body) arg))
  (hc : s.control = .term (.app (.recLam self x body) arg))
  (hs : s.stack = [])
  (hscoped : ChannelConfig.WellScoped s)
  (active : Nat) :
  PathChannelEvaluation D_0 j_0 realize s active [] := by
have <hdistFn, hdistArg> := hdist
have hdistBody : MeasureDistinct realize body := hdistFn
let sFn : ChannelConfig C :=
  {s with
    control := .term (.recLam self x body)
    stack := .argument arg s.env :: s.stack}
let sClo : ChannelConfig C :=
  {s with
    control := .value (.recClosure self x body s.env)
    stack := .argument arg s.env :: s.stack}
let sArg : ChannelConfig C :=
  {s with
    control := .term arg
    env := s.env
    stack := .function (.recClosure self x body s.env) :: s.stack}
refine PathChannelEvaluation.application hc ?_
refine PathChannelEvaluation.recursive (s := sFn) rfl ?_
refine PathChannelEvaluation.evaluateArgument (s := sClo) rfl rfl ?_
exact atomic_under_recClosure_pathChannelEvaluation D_0 j_0 realize
  (s := sArg) harg hdistArg hbody hdistBody rfl (by simp [sArg, hs])
  ((channelInternalStep_of_evaluateArgument (s := sClo) rfl
    rfl).preserve_wellScoped
    ((channelInternalStep_of_recursive (s := sFn) rfl).preserve_wellScoped
      ((channelInternalStep_of_application hc).preserve_wellScoped
        hscoped))))
  active

/-! ## Leftover-arity spines and `Productive 0` arguments -/

/-- Observed leftover argument frames, all tagged with the same active
coordinate. -/
def argumentObserved {C : Type} (active : Nat)
  (frames : List (Term (QubitPrimitive C) x RuntimeEnv C)) :
  ObservedStack C :=
  frames.map fun p => (.argument p.1 p.2, active)

@[simp]
theorem argumentObserved_nil {C : Type} (active : Nat) :
  argumentObserved active
    ([] : List (Term (QubitPrimitive C) x RuntimeEnv C)) = [] :=
  rfl

```

```

@[simp]
theorem argumentObserved_cons {C : Type} (active : Nat)
  (arg : Term (QubitPrimitive C)) (callEnv : RuntimeEnv C)
  (rest : List (Term (QubitPrimitive C) x RuntimeEnv C)) :
  argumentObserved active ((arg, callEnv) :: rest) =
    (.argument arg callEnv, active) ::
      argumentObserved active rest :=
  rfl

theorem argumentObserved_erase {C : Type} (active : Nat)
  (frames : List (Term (QubitPrimitive C) x RuntimeEnv C)) :
  ObservedStack.erase (argumentObserved active frames) =
    argumentStack frames := by
  induction frames with
  | nil => simp [argumentObserved, argumentStack, ObservedStack.erase]

```

Lean 4 source (lines 801–1200)

```

| cons p rest ih =>
  cases p
  simp [argumentObserved, argumentStack, ObservedStack.erase, ih]

/-- Leftover frames that a path evaluation can run as arguments. -/
def AtomicFramesOk {C : Type}
  {D_0 : QDomain.{0}}
  {j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier)}
  (realize : C -> HSemanticValue D_0 j_0)
  (frames : List (Term (QubitPrimitive C) x RuntimeEnv C)) : Prop :=
  forall p in frames, Atomic p.1 /\ MeasureDistinct realize p.1

/-- An `Atomic` argument under an ordinary closure, then a `Productive n`
body under `n` leftover Atomic argument frames. -/
theorem atomic_under_closure_then_args_pathChannelEvaluation {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} {arg : Term (QubitPrimitive C)}
  {x : Name} {body : Term (QubitPrimitive C)} {cloEnv : RuntimeEnv C}
  {n : Nat} {frames : List (Term (QubitPrimitive C) x RuntimeEnv C)}
  (hatom : Atomic arg)
  (hdistArg : MeasureDistinct realize arg)
  (_hbody : Productive n body)
  (hdistBody : MeasureDistinct realize body)
  (_hframes : frames.length = n)
  (_hok : AtomicFramesOk realize frames)
  (hc : s.control = .term arg)
  (hs : s.stack =
    .function (.closure x body cloEnv) :: argumentStack frames)
  (hscoped : ChannelConfig.WellScoped s)
  (active : Nat)
  (hbodyEval :
    forall (s' : ChannelConfig C),
      s'.control = .term body ->
      s'.stack = argumentStack frames ->
      ChannelConfig.WellScoped s' ->
      PathChannelEvaluation D_0 j_0 realize s' active
        (argumentObserved active frames)) :
  PathChannelEvaluation D_0 j_0 realize s active
    ((.function (.closure x body cloEnv), active) ::
      argumentObserved active frames) := by
  induction hatom generalizing s with

```



```

| var y =>
  have hx : s.control = .term (.var y) := hc
  have <hctl, _> := hscoped
  rw [hx] at hctl
  obtain <v, hlookup> := covers_var hctl.right
  refine PathChannelEvaluation.varLookup hx hlookup ?_
  refine PathChannelEvaluation.beta rfl hs ?_
  exact hbodyEval _ rfl rfl
  ((channelInternalStep_of_beta (s := {s with control := .value v})
    rfl hs).preserve_wellScoped
    ((channelInternalStep_of_variable hx hlookup).preserve_wellScoped
      hscoped))
| ret value =>
  have hx : s.control = .term (.prim (.ret value)) := hc
  refine PathChannelEvaluation.returnPayload hx ?_
  refine PathChannelEvaluation.beta rfl hs ?_
  exact hbodyEval _ rfl rfl
  ((channelInternalStep_of_beta
    (s := {s with control := .value (.payload value)})
    rfl hs).preserve_wellScoped
    ((channelInternalStep_of_return hx).preserve_wellScoped hscoped))
| measureZ zeroValue oneValue =>
  have hx : s.control =
    .term (.prim (.measureZ zeroValue oneValue)) := hc
  refine PathChannelEvaluation.measurement hx hdistArg ?_ ?_
  * refine PathChannelEvaluation.beta rfl hs ?_
  exact hbodyEval _ rfl rfl
  ((channelInternalStep_of_beta
    (s :=
      {s with
        control := .value (.payload zeroValue)
        quantum :=
          applyOperation (measurementOperation false) s.quantum})
    rfl hs).preserve_wellScoped
    (wellScoped_payload_child hx hscoped zeroValue _))
  * refine PathChannelEvaluation.beta rfl hs ?_
  exact hbodyEval _ rfl rfl
  ((channelInternalStep_of_beta
    (s :=
      {s with
        control := .value (.payload oneValue)
        quantum :=
          applyOperation (measurementOperation true) s.quantum})
    rfl hs).preserve_wellScoped
    (wellScoped_payload_child hx hscoped oneValue _))
| lam z b =>
  have hx : s.control = .term (.lam z b) := hc
  refine PathChannelEvaluation.lambda hx ?_
  refine PathChannelEvaluation.beta rfl hs ?_
  exact hbodyEval _ rfl rfl
  ((channelInternalStep_of_beta
    (s := {s with control := .value (.closure z b s.env)})
    rfl hs).preserve_wellScoped
    ((channelInternalStep_of_lambda hx).preserve_wellScoped hscoped))
| recLam self z b =>
  have hx : s.control = .term (.recLam self z b) := hc
  refine PathChannelEvaluation.recursive hx ?_
  refine PathChannelEvaluation.beta rfl hs ?_
  exact hbodyEval _ rfl rfl
  ((channelInternalStep_of_beta
    (s :=
      {s with control := .value (.recClosure self z b s.env)})
    rfl hs).preserve_wellScoped

```

```

      ((channelInternalStep_of_recursive hx).preserve_wellScoped
        hscoped))
| intern left right hleft hright ihL ihR =>
  have hx : s.control = .term (.intern left right) := hc
  have <hdistL, hdistR> := hdistArg
  refine PathChannelEvaluation.intern hx ?_ ?_
  * exact ihL (s := {s with control := .term left}) hdistL rfl hs
    (wellScoped_intern_left hx hscoped)
  * exact ihR (s := {s with control := .term right}) hdistR rfl hs
    (wellScoped_intern_right hx hscoped)
| prob p left right hp_0 hp_1 hleft hright ihL ihR =>
  have hx : s.control = .term (.prob p left right) := hc
  have <hdistL, hdistR> := hdistArg
  by_cases hz : p = 0
  * subst hz
    refine PathChannelEvaluation.probZero hx ?_
    exact ihR (s :=
      {s with
        control := .term right
        quantum :=
          applyOperation
            (sourceProbabilityOperation 1 zero_le_one (le_refl 1))
            s.quantum})
    hdistR rfl hs (wellScoped_prob_right hx hscoped _)
  * by_cases ho : p = 1
    * subst ho
      refine PathChannelEvaluation.probOne hx ?_
      exact ihL (s :=
        {s with
          control := .term left
          quantum :=
            applyOperation
              (sourceProbabilityOperation 1 zero_le_one (le_refl 1))
              s.quantum})
      hdistL rfl hs (wellScoped_prob_left hx hscoped _)
    * have hp0' : 0 < p := lt_of_le_of_ne hp_0 (Ne.symm hz)
      have hp1' : p < 1 := lt_of_le_of_ne hp_1 ho
      refine PathChannelEvaluation.probability hp0' hp1' hx ?_ ?_
      * exact ihL (s :=
        {s with
          control := .term left
          quantum :=
            applyOperation
              (sourceProbabilityOperation p hp0'.le hp1'.le)
              s.quantum})
      hdistL rfl hs (wellScoped_prob_left hx hscoped _)
      * exact ihR (s :=
        {s with
          control := .term right
          quantum :=
            applyOperation
              (sourceProbabilityOperation (1 - p)
                (sub_nonneg.mpr hp1'.le) (by linarith))
              s.quantum})
      hdistR rfl hs (wellScoped_prob_right hx hscoped _)

/-- The same as `atomic_under_closure_then_args_pathChannelEvaluation`
for a recursive closure frame. -/
theorem atomic_under_recClosure_then_args_pathChannelEvaluation {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)

```

```

{s : ChannelConfig C} {arg : Term (QubitPrimitive C)}
{self x : Name} {body : Term (QubitPrimitive C)} {cloEnv : RuntimeEnv C}
{n : Nat} {frames : List (Term (QubitPrimitive C) x RuntimeEnv C)}
(hatom : Atomic arg)
(hdistArg : MeasureDistinct realize arg)
(_hbody : Productive n body)
(hdistBody : MeasureDistinct realize body)
(_hframes : frames.length = n)
(_hok : AtomicFramesOk realize frames)
(hc : s.control = .term arg)
(hs : s.stack =
  .function (.recClosure self x body cloEnv) :: argumentStack frames)
(hscoped : ChannelConfig.WellScoped s)
(active : Nat)
(hbodyEval :
  forall (s' : ChannelConfig C),
    s'.control = .term body ->
    s'.stack = argumentStack frames ->
    ChannelConfig.WellScoped s' ->
    PathChannelEvaluation D_0 j_0 realize s' active
      (argumentObserved active frames)) :
  PathChannelEvaluation D_0 j_0 realize s active
    ((.function (.recClosure self x body cloEnv), active) ::
      argumentObserved active frames) := by
induction hatom generalizing s with
| var y =>
  have hx : s.control = .term (.var y) := hc
  have <hctl, _> := hscoped
  rw [hx] at hctl
  obtain <v, hlookup> := covers_var hctl.right
  refine PathChannelEvaluation.varLookup hx hlookup ?_
  refine PathChannelEvaluation.recBeta rfl hs ?_
  exact hbodyEval _ rfl rfl
  ((channelInternalStep_of_recBeta (s := {s with control := .value v})
    rfl hs).preserve_wellScoped
    ((channelInternalStep_of_variable hx hlookup).preserve_wellScoped
      hscoped))
| ret value =>
  have hx : s.control = .term (.prim (.ret value)) := hc
  refine PathChannelEvaluation.returnPayload hx ?_
  refine PathChannelEvaluation.recBeta rfl hs ?_
  exact hbodyEval _ rfl rfl
  ((channelInternalStep_of_recBeta
    (s := {s with control := .value (.payload value)})
    rfl hs).preserve_wellScoped
    ((channelInternalStep_of_return hx).preserve_wellScoped hscoped))
| measureZ zeroValue oneValue =>
  have hx : s.control =
    .term (.prim (.measureZ zeroValue oneValue)) := hc
  refine PathChannelEvaluation.measurement hx hdistArg ?_ ?_
  * refine PathChannelEvaluation.recBeta rfl hs ?_
  exact hbodyEval _ rfl rfl
  ((channelInternalStep_of_recBeta
    (s :=
      {s with
        control := .value (.payload zeroValue)
        quantum :=
          applyOperation (measurementOperation false) s.quantum})
    rfl hs).preserve_wellScoped
    (wellScoped_payload_child hx hscoped zeroValue _))
  * refine PathChannelEvaluation.recBeta rfl hs ?_
  exact hbodyEval _ rfl rfl
  ((channelInternalStep_of_recBeta

```

```

(s :=
  {s with
    control := .value (.payload oneValue)
    quantum :=
      applyOperation (measurementOperation true) s.quantum}}
  rfl hs).preserve_wellScoped
  (wellScoped_payload_child hx hscoped oneValue _))
| lam z b =>
  have hx : s.control = .term (.lam z b) := hc
  refine PathChannelEvaluation.lambda hx ?_
  refine PathChannelEvaluation.recBeta rfl hs ?_
  exact hbodyEval _ rfl rfl
  ((channelInternalStep_of_recBeta
    (s := {s with control := .value (.closure z b s.env)}))
    rfl hs).preserve_wellScoped
    ((channelInternalStep_of_lambda hx).preserve_wellScoped hscoped))
| recLam self' z b =>
  have hx : s.control = .term (.recLam self' z b) := hc
  refine PathChannelEvaluation.recursive hx ?_
  refine PathChannelEvaluation.recBeta rfl hs ?_
  exact hbodyEval _ rfl rfl
  ((channelInternalStep_of_recBeta
    (s :=
      {s with control := .value (.recClosure self' z b s.env)}))
    rfl hs).preserve_wellScoped
    ((channelInternalStep_of_recursive hx).preserve_wellScoped
      hscoped))
| intern left right hleft hright ihL ihR =>
  have hx : s.control = .term (.intern left right) := hc
  have <hdistL, hdistR> := hdistArg
  refine PathChannelEvaluation.intern hx ?_ ?_
  * exact ihL (s := {s with control := .term left}) hdistL rfl hs
    (wellScoped_intern_left hx hscoped)
  * exact ihR (s := {s with control := .term right}) hdistR rfl hs
    (wellScoped_intern_right hx hscoped)
| prob p left right hp_0 hp_1 hleft hright ihL ihR =>
  have hx : s.control = .term (.prob p left right) := hc
  have <hdistL, hdistR> := hdistArg
  by_cases hz : p = 0
  * subst hz
    refine PathChannelEvaluation.probZero hx ?_
    exact ihR (s :=
      {s with
        control := .term right
        quantum :=
          applyOperation
            (sourceProbabilityOperation 1 zero_le_one (le_refl 1))
            s.quantum}}
      hdistR rfl hs (wellScoped_prob_right hx hscoped _))
  * by_cases ho : p = 1
    * subst ho
      refine PathChannelEvaluation.probOne hx ?_
      exact ihL (s :=
        {s with
          control := .term left
          quantum :=
            applyOperation
              (sourceProbabilityOperation 1 zero_le_one (le_refl 1))
              s.quantum}}
        hdistL rfl hs (wellScoped_prob_left hx hscoped _))
    * have hp0' : 0 < p := lt_of_le_of_ne hp_0 (Ne.symm hz)
      have hp1' : p < 1 := lt_of_le_of_ne hp_1 ho
      refine PathChannelEvaluation.probability hp0' hp1' hx ?_ ?_

```

```

* exact ihL (s :=
  {s with
    control := .term left
    quantum :=
      applyOperation
        (sourceProbabilityOperation p hp0'.le hp1'.le)
        s.quantum})
  hdistL rfl hs (wellScoped_prob_left hx hscoped _)
* exact ihR (s :=
  {s with
    control := .term right
    quantum :=
      applyOperation
        (sourceProbabilityOperation (1 - p)
          (sub_nonneg.mpr hp1'.le) (by linarith))
        s.quantum})
  hdistR rfl hs (wellScoped_prob_right hx hscoped _)

/-- A `Productive n` term under exactly `n` leftover Atomic argument
frames has a branch-complete path evaluation. This is leftover-arity
(`app (app (lam (lam *) *) *)`) and, when the leftover argument is
itself `Productive 0` via `atomic`, the inner application spine. -/
theorem productive_under_argument_frames_pathChannelEvaluation {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} {n : Nat} {code : Term (QubitPrimitive C)}
  {frames : List (Term (QubitPrimitive C) x RuntimeEnv C)}
  (hprod : Productive n code)
  (hdist : MeasureDistinct realize code)
  (hlen : frames.length = n)
  (hok : AtomicFramesOk realize frames)
  (hc : s.control = .term code)
  (hs : s.stack = argumentStack frames)
  (hscoped : ChannelConfig.WellScoped s)
  (active : Nat) :
  PathChannelEvaluation D_0 j_0 realize s active
    (argumentObserved active frames) := by
induction hprod generalizing s frames with
| atomic hatom =>
  have hnil : frames = [] := List.eq_nil_of_length_eq_zero hlen
  subst frames
  exact atomic_nil_pathChannelEvaluation D_0 j_0 realize hatom hdist hc
    (by simp [argumentStack] using hs) hscoped active
| lam n x body hprod ih =>
  match frames with
  | [] =>
    exact (Nat.succ_ne_zero n hlen.symm).elim
  | (arg, callEnv) :: rest =>
    have hlenRest : rest.length = n := by simp using hlen
    have <hatomArg, hdistArg> := hok (arg, callEnv) (by simp)
    have hokRest : AtomicFramesOk realize rest :=
      fun q hq => hok q (by simp [hq])
    have hdistBody : MeasureDistinct realize body := hdist
    have hscopedArg :
      ChannelConfig.WellScoped
        {s with
          control := .term arg
          env := callEnv
          stack :=
            .function (.closure x body s.env) ::
              argumentStack rest} :=

```

```

    (channelInternalStep_of_evaluateArgument
      (s := {s with control := .value (.closure x body s.env)}))
    rfl (by simp using hs)).preserve_wellScoped
    ((channelInternalStep_of_lambda (s := s) hc).preserve_wellScoped
      hscoped)
  refine PathChannelEvaluation.lambda (s := s) hc ?_
  refine PathChannelEvaluation.evaluateArgument
    (s := {s with control := .value (.closure x body s.env)}))
    rfl (by simp using hs) ?_
  exact atomic_under_closure_then_args_pathChannelEvaluation
    D_0 j_0 realize hatomArg hdistArg hprod hdistBody hlenRest hokRest
  rfl rfl hscopedArg active
  (fun s' hc' hs' hscoped' =>
    ih (s := s') (frames := rest) hdistBody hlenRest hokRest
      hc' hs' hscoped')
| recLam n self x body hprod ih =>
  match frames with
  | [] =>
    exact (Nat.succ_ne_zero n hlen.symm).elim
  | (arg, callEnv) :: rest =>
    have hlenRest : rest.length = n := by simp using hlen
    have <hatomArg, hdistArg> := hok (arg, callEnv) (by simp)
    have hokRest : AtomicFramesOk realize rest :=
      fun q hq => hok q (by simp [hq])
    have hdistBody : MeasureDistinct realize body := hdist
    have hscopedArg :
      ChannelConfig.WellScoped
      {s with
        control := .term arg
        env := callEnv
        stack :=
          .function (.recClosure self x body s.env) ::
            argumentStack rest} :=
      (channelInternalStep_of_evaluateArgument
        (s := {s with control := .value (.recClosure self x body s.env)}))
        rfl (by simp using hs)).preserve_wellScoped
        ((channelInternalStep_of_recursive (s := s) hc).preserve_wellScoped
          hscoped)
    refine PathChannelEvaluation.recursive (s := s) hc ?_
    refine PathChannelEvaluation.evaluateArgument

```

Lean 4 source (lines 1201–1600)

```

    (s := {s with control := .value (.recClosure self x body s.env)}))
    rfl (by simp using hs) ?_
  exact atomic_under_recClosure_then_args_pathChannelEvaluation
    D_0 j_0 realize hatomArg hdistArg hprod hdistBody hlenRest hokRest
  rfl rfl hscopedArg active
  (fun s' hc' hs' hscoped' =>
    ih (s := s') (frames := rest) hdistBody hlenRest hokRest
      hc' hs' hscoped')
| app n fn arg hfn harg ih =>
  have <hdistFn, hdistArg> := hdist
  refine PathChannelEvaluation.application hc ?_
  exact ih (frames := (arg, s.env) :: frames) hdistFn
    (by simp using hlen)
  (fun q hq => by
    simp at hq
    rcases hq with hhere | hrest
    * cases hhere
      exact <harg, hdistArg>
    * exact hok q hrest)
  rfl (by simp [hs])
  ((channelInternalStep_of_application hc).preserve_wellScoped

```

```

    hscoped)

/-- Closed `extern` at the empty stack, with Atomic children. -/
theorem extern_nil_pathChannelEvaluation {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} {left right : Term (QubitPrimitive C)}
  (hleft : Atomic left)
  (hright : Atomic right)
  (hdist : MeasureDistinct realize (.extern left right))
  (hc : s.control = .term (.extern left right))
  (hs : s.stack = [])
  (hscoped : ChannelConfig.WellScoped s)
  (active : Nat) :
  PathChannelEvaluation D_0 j_0 realize s active [] := by
  have <hdistL, hdistR> := hdist
  match active with
  | 0 => exact PathChannelEvaluation.externRoot hc
  | n + 1 =>
    let selected : Bool := n % 2 != 0
    let childActive : Nat := n / 2
    have hstep :=
      channelExternalStep_of_extern (selected := selected) hc
    refine (branchCoordinate_succ n) |>
      PathChannelEvaluation.externBranch hc hstep ?_
    exact atomic_nil_pathChannelEvaluation D_0 j_0 realize
      (s := {s with control := .term (if selected then right else left)})
      (by cases selected <;> first | exact hright | exact hleft)
      (by cases selected <;> first | exact hdistR | exact hdistL)
      rfl hs (hstep.preserve_wellScoped hscoped) childActive

/-- An `Atomic` argument under two ordinary closures: beta into the
inner `Atomic` body under the outer closure, then the outer body at
the empty stack. This is `app` as an argument. -/
theorem atomic_under_two_closures_pathChannelEvaluation {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} {arg : Term (QubitPrimitive C)}
  {y : Name} {inner : Term (QubitPrimitive C)} {cloY : RuntimeEnv C}
  {x : Name} {body : Term (QubitPrimitive C)} {cloX : RuntimeEnv C}
  (hatom : Atomic arg)
  (hdistArg : MeasureDistinct realize arg)
  (hinner : Atomic inner)
  (hdistInner : MeasureDistinct realize inner)
  (hbody : Atomic body)
  (hdistBody : MeasureDistinct realize body)
  (hc : s.control = .term arg)
  (hs : s.stack =
    [.function (.closure y inner cloY),
     .function (.closure x body cloX)])
  (hscoped : ChannelConfig.WellScoped s)
  (active : Nat) :
  PathChannelEvaluation D_0 j_0 realize s active
    [(function (.closure y inner cloY), active),
     (function (.closure x body cloX), active)] := by
  induction hatom generalizing s with
  | var z =>
    have hx : s.control = .term (.var z) := hc
    have <hctl, _> := hscoped

```

```

rw [hx] at hctl
obtain <v, hlookup> := covers_var hctl.right
refine PathChannelEvaluation.varLookup hx hlookup ?_
refine PathChannelEvaluation.beta rfl hs ?_
exact atomic_under_closure_pathChannelEvaluation D_0 j_0 realize
  hinner hdistInner hbody hdistBody rfl rfl
  ((channelInternalStep_of_beta (s := {s with control := .value v})
    rfl hs).preserve_wellScoped
    ((channelInternalStep_of_variable hx hlookup).preserve_wellScoped
      hscoped))
  active
| ret value =>
  have hx : s.control = .term (.prim (.ret value)) := hc
  refine PathChannelEvaluation.returnPayload hx ?_
  refine PathChannelEvaluation.beta rfl hs ?_
  exact atomic_under_closure_pathChannelEvaluation D_0 j_0 realize
    hinner hdistInner hbody hdistBody rfl rfl
    ((channelInternalStep_of_beta
      (s := {s with control := .value (.payload value)})
      rfl hs).preserve_wellScoped
      ((channelInternalStep_of_return hx).preserve_wellScoped hscoped))
    active
| measureZ zeroValue oneValue =>
  have hx : s.control =
    .term (.prim (.measureZ zeroValue oneValue)) := hc
  refine PathChannelEvaluation.measurement hx hdistArg ?_ ?_
  * refine PathChannelEvaluation.beta rfl hs ?_
  exact atomic_under_closure_pathChannelEvaluation D_0 j_0 realize
    hinner hdistInner hbody hdistBody rfl rfl
    ((channelInternalStep_of_beta
      (s :=
        {s with
          control := .value (.payload zeroValue)
          quantum :=
            applyOperation (measurementOperation false) s.quantum})
      rfl hs).preserve_wellScoped
      (wellScoped_payload_child hx hscoped zeroValue _))
    active
  * refine PathChannelEvaluation.beta rfl hs ?_
  exact atomic_under_closure_pathChannelEvaluation D_0 j_0 realize
    hinner hdistInner hbody hdistBody rfl rfl
    ((channelInternalStep_of_beta
      (s :=
        {s with
          control := .value (.payload oneValue)
          quantum :=
            applyOperation (measurementOperation true) s.quantum})
      rfl hs).preserve_wellScoped
      (wellScoped_payload_child hx hscoped oneValue _))
    active
| lam z b =>
  have hx : s.control = .term (.lam z b) := hc
  refine PathChannelEvaluation.lambda hx ?_
  refine PathChannelEvaluation.beta rfl hs ?_
  exact atomic_under_closure_pathChannelEvaluation D_0 j_0 realize
    hinner hdistInner hbody hdistBody rfl rfl
    ((channelInternalStep_of_beta
      (s := {s with control := .value (.closure z b s.env)})
      rfl hs).preserve_wellScoped
      ((channelInternalStep_of_lambda hx).preserve_wellScoped hscoped))
    active
| recLam self z b =>
  have hx : s.control = .term (.recLam self z b) := hc

```



```

refine PathChannelEvaluation.recursive hx ?_
refine PathChannelEvaluation.beta rfl hs ?_
exact atomic_under_closure_pathChannelEvaluation D_0 j_0 realize
  hinner hdistInner hbody hdistBody rfl rfl
  ((channelInternalStep_of_beta
    (s :=
      {s with control := .value (.recClosure self z b s.env)})
    rfl hs).preserve_wellScoped
    ((channelInternalStep_of_recursive hx).preserve_wellScoped
      hscoped))
  active
| intern left right hleft hright ihL ihR =>
  have hx : s.control = .term (.intern left right) := hc
  have <hdistL, hdistR> := hdistArg
  refine PathChannelEvaluation.intern hx ?_ ?_
  * exact ihL (s := {s with control := .term left}) hdistL rfl hs
    (wellScoped_intern_left hx hscoped)
  * exact ihR (s := {s with control := .term right}) hdistR rfl hs
    (wellScoped_intern_right hx hscoped)
| prob p left right hp_0 hp_1 hleft hright ihL ihR =>
  have hx : s.control = .term (.prob p left right) := hc
  have <hdistL, hdistR> := hdistArg
  by_cases hz : p = 0
  * subst hz
    refine PathChannelEvaluation.probZero hx ?_
    exact ihR (s :=
      {s with
        control := .term right
        quantum :=
          applyOperation
            (sourceProbabilityOperation 1 zero_le_one (le_refl 1))
            s.quantum})
    hdistR rfl hs (wellScoped_prob_right hx hscoped _)
  * by_cases ho : p = 1
    * subst ho
      refine PathChannelEvaluation.probOne hx ?_
      exact ihL (s :=
        {s with
          control := .term left
          quantum :=
            applyOperation
              (sourceProbabilityOperation 1 zero_le_one (le_refl 1))
              s.quantum})
      hdistL rfl hs (wellScoped_prob_left hx hscoped _)
    * have hp0' : 0 < p := lt_of_le_of_ne hp_0 (Ne.symm hz)
      have hp1' : p < 1 := lt_of_le_of_ne hp_1 ho
      refine PathChannelEvaluation.probability hp0' hp1' hx ?_ ?_
      * exact ihL (s :=
        {s with
          control := .term left
          quantum :=
            applyOperation
              (sourceProbabilityOperation p hp0'.le hp1'.le)
              s.quantum})
      hdistL rfl hs (wellScoped_prob_left hx hscoped _)
    * exact ihR (s :=
      {s with
        control := .term right
        quantum :=
          applyOperation
            (sourceProbabilityOperation (1 - p)
              (sub_nonneg.mpr hp1'.le) (by linarith))
            s.quantum})

```

```

      hdistR rfl hs (wellScoped_prob_right hx hscoped _)

/-- Path evaluation of `app (lam x body) (app (lam y inner) arg)` at the
empty stack when every piece is atomic. -/
theorem app_lam_app_nil_pathChannelEvaluation {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} {x y : Name}
  {body inner arg : Term (QubitPrimitive C)}
  (hbody : Atomic body)
  (hinner : Atomic inner)
  (harg : Atomic arg)
  (hdist :
    MeasureDistinct realize
      (.app (.lam x body) (.app (.lam y inner) arg)))
  (hc : s.control =
    .term (.app (.lam x body) (.app (.lam y inner) arg)))
  (hs : s.stack = [])
  (hscoped : ChannelConfig.WellScoped s)
  (active : Nat) :
    PathChannelEvaluation D_0 j_0 realize s active [] := by
have <hdistFn, hdistInnerApp> := hdist
have hdistBody : MeasureDistinct realize body := hdistFn
have <hdistInnerFn, hdistArg> := hdistInnerApp
have hdistInner : MeasureDistinct realize inner := hdistInnerFn
refine PathChannelEvaluation.application hc ?_
refine PathChannelEvaluation.lambda
  (s :=
    {s with
      control := .term (.lam x body)
      stack := .argument (.app (.lam y inner) arg) s.env :: s.stack})
  rfl ?_
refine PathChannelEvaluation.evaluateArgument
  (s :=
    {s with
      control := .value (.closure x body s.env)
      stack := .argument (.app (.lam y inner) arg) s.env :: s.stack})
  rfl rfl ?_
refine PathChannelEvaluation.application
  (s :=
    {s with
      control := .term (.app (.lam y inner) arg)
      stack := .function (.closure x body s.env) :: s.stack})
  rfl ?_
refine PathChannelEvaluation.lambda
  (s :=
    {s with
      control := .term (.lam y inner)
      stack :=
        .argument arg s.env ::
        .function (.closure x body s.env) :: s.stack})
  rfl ?_
refine PathChannelEvaluation.evaluateArgument
  (s :=
    {s with
      control := .value (.closure y inner s.env)
      stack :=
        .argument arg s.env ::
        .function (.closure x body s.env) :: s.stack})
  rfl rfl ?_
exact atomic_under_two_closures_pathChannelEvaluation D_0 j_0 realize

```

```

harg hdistArg hinner hdistInner hbody hdistBody rfl
(by simp [hs])
((channelInternalStep_of_evaluateArgument
  (s :=
    {s with
      control := .value (.closure y inner s.env)
      stack :=
        .argument arg s.env ::
        .function (.closure x body s.env) :: s.stack})
  rfl rfl).preserve_wellScoped
  ((channelInternalStep_of_lambda
    (s :=
      {s with
        control := .term (.lam y inner)
        stack :=
          .argument arg s.env ::
          .function (.closure x body s.env) :: s.stack})
    rfl).preserve_wellScoped
    ((channelInternalStep_of_application
      (s :=
        {s with
          control := .term (.app (.lam y inner) arg)
          stack := .function (.closure x body s.env) :: s.stack})
        rfl).preserve_wellScoped
        ((channelInternalStep_of_evaluateArgument
          (s :=
            {s with
              control := .value (.closure x body s.env)
              stack :=
                .argument (.app (.lam y inner) arg) s.env :: s.stack})
            rfl rfl).preserve_wellScoped
            ((channelInternalStep_of_lambda
              (s :=
                {s with
                  control := .term (.lam x body)
                  stack :=
                    .argument (.app (.lam y inner) arg) s.env ::
                    s.stack})
                rfl).preserve_wellScoped
                ((channelInternalStep_of_application hc).preserve_wellScoped
                  hscoped))))))
    active

/-- A closed `Productive 0` program, or a closed `extern` with Atomic
children, has a branch-complete path evaluation at every heap
coordinate. `Productive 0` includes leftover-arity spines and
intern-in-body. -/
theorem closed_productive_pathChannelEvaluation {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (code : Term (QubitPrimitive C))
  (hclosed : Closed code)
  (hprod : Productive 0 code \
    (exists left right,
      code = .extern left right /\ Atomic left /\ Atomic right) \
    (exists x y body inner arg,
      code = .app (.lam x body) (.app (.lam y inner) arg) /\
        Atomic body /\ Atomic inner /\ Atomic arg))
  (hdist : MeasureDistinct realize code)
  (quantum : NormalizedDensity 2)
  (i : Nat) :

```

```

PathChannelEvaluation D_0 j_0 realize
  (initialChannelConfig code quantum) i [] := by
have hscoped := initialChannelConfig_wellScoped hclosed quantum
have hc := initialChannelConfig_control code quantum
have hs := initialChannelConfig_stack code quantum
rcases hprod with hP | hex | happ
* exact productive_under_argument_frames_pathChannelEvaluation D_0 j_0
  realize hP hdist (frames := []) rfl (fun _ h => by cases h) hc
  (by simp [argumentStack, hs]) hscoped i
* obtain <left, right, rfl, hL, hR> := hex
  exact extern_nil_pathChannelEvaluation D_0 j_0 realize hL hR hdist hc hs
  hscoped i
* obtain <x, y, body, inner, arg, rfl, hbody, hinner, harg> := happ
  exact app_lam_app_nil_pathChannelEvaluation D_0 j_0 realize hbody
  hinner harg hdist hc hs hscoped i

/-- Channel-tree completeness for a closed productive program. -/
theorem closed_term_presented_channelTreeCompleteness_of_productive
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (code : Term (QubitPrimitive C))
  (hclosed : Closed code)
  (hprod : Productive 0 code \/)
  (exists left right,
    code = .extern left right /\ Atomic left /\ Atomic right) \/>
  (exists x y body inner arg,
    code = .app (.lam x body) (.app (.lam y inner) arg) /\
      Atomic body /\ Atomic inner /\ Atomic arg))
  (hdist : MeasureDistinct realize code)
  (quantum : NormalizedDensity 2)
  (semanticEnv : Env (HSemanticValue D_0 j_0)) :
PresentedChannelTreeCompleteness D_0 j_0 realize
  (initialChannelConfig code quantum)
  (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv) :=
closed_term_presented_channelTreeCompleteness D_0 j_0 realize code hclosed
quantum semanticEnv
(fun i =>
  closed_productive_pathChannelEvaluation D_0 j_0 realize code hclosed
  hprod hdist quantum i)

/-- Token adequacy for a closed productive program. -/
theorem closed_term_presented_token_adequacy_of_productive {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (code : Term (QubitPrimitive C))
  (hclosed : Closed code)
  (hprod : Productive 0 code \/)
  (exists left right,
    code = .extern left right /\ Atomic left /\ Atomic right) \/>
  (exists x y body inner arg,
    code = .app (.lam x body) (.app (.lam y inner) arg) /\
      Atomic body /\ Atomic inner /\ Atomic arg))
  (hdist : MeasureDistinct realize code)
  (quantum : NormalizedDensity 2)
  (semanticEnv : Env (HSemanticValue D_0 j_0))
  (selectors : List Bool)
  (? : HSemanticValue D_0 j_0 -> FiniteInstrumentComp 2 PUnit.{1})
  (k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2))

```

```

(hk : forall d, k d = (? d).satisfiedTTTheory resultCode)

Lean 4 source (lines 1601–1744)

(i : Nat) (token : TTObservationToken 2) :
token in HardwareAdequacy.selectPath selectors
  (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv)
  i k <->
exists fuel, exists (tree : ChannelTree C
  (initialChannelConfig code quantum))
  (R : ChannelTreeRealization D_0 j_0 realize tree),
  tree.depth <= fuel /\
  ResultAvailable tree selectors i /\
  TTObservationToken.Holds resultCode token
  ((restrictedInstrument D_0 j_0 realize tree R selectors i).bind
  ?) :=
closed_term_presented_token_adequacy D_0 j_0 realize code hclosed quantum
semanticEnv
(fun i =>
  closed_productive_pathChannelEvaluation D_0 j_0 realize code hclosed
  hprod hdist quantum i)
selectors ? k hk i token

/#!/ ## Restricted extern arguments -/

/-- The direct-completeness cases that cannot be represented by the
current path certificate: external selection changes the active
coordinate before the pending beta/rec-beta. Coordinate-constancy of
the body unfolding makes that reindexing sound. The Atomic hypotheses
record the productive syntax class; the additional `AdminNoApp`
hypotheses are the currently proved under-frame boundary. -/
inductive RestrictedExternApplication {C : Type} :
  Term (QubitPrimitive C) -> Prop where
| lam (x : Name) (body left right : Term (QubitPrimitive C))
  (hnoapp : NoApp body) (hadminBody : AdminNoApp body)
  (hleft : Atomic left) (hright : Atomic right)
  (hadminL : AdminNoApp left) (hadminR : AdminNoApp right) :
  RestrictedExternApplication
  (.app (.lam x body) (.extern left right))
| recLam (self x : Name) (body left right : Term (QubitPrimitive C))
  (hnoapp : NoApp body) (hadminBody : AdminNoApp body)
  (hleft : Atomic left) (hright : Atomic right)
  (hadminL : AdminNoApp left) (hadminR : AdminNoApp right) :
  RestrictedExternApplication
  (.app (.recLam self x body) (.extern left right))

/-- Existing path-productive coverage, extended by the sound direct
extern-under-closure cases. -/
def ProductiveClosedCase {C : Type} (code : Term (QubitPrimitive C)) :
  Prop :=
(Productive 0 code /\
  (exists left right,
    code = .extern left right /\ Atomic left /\ Atomic right) /\
  (exists x y body inner arg,
    code = .app (.lam x body) (.app (.lam y inner) arg) /\
    Atomic body /\ Atomic inner /\ Atomic arg)) /\
  RestrictedExternApplication code

/-- Closed productive completeness including the restricted ordinary and
recursive extern-as-argument cases. This wrapper is direct rather than
a `PathChannelEvaluation`: external selection changes the active
coordinate before beta, while the explicit administrative hypotheses
prove that the pending continuation commutes with that selection. -/
theorem closed_term_presented_channelTreeCompleteness_of_productive_case

```

```

{C : Type}
(D_0 : QDomain.{0})
(j_0 : IsContinuousLatticeProjection D_0.carrier
  (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
(realize : C -> HSemanticValue D_0 j_0)
(code : Term (QubitPrimitive C))
(hclosed : Closed code)
(hcase : ProductiveClosedCase code)
(hdist : MeasureDistinct realize code)
(quantum : NormalizedDensity 2)
(semanticEnv : Env (HSemanticValue D_0 j_0)) :
PresentedChannelTreeCompleteness D_0 j_0 realize
  (initialChannelConfig code quantum)
  (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv) := by
rcases hcase with hbase | hextern
* exact closed_term_presented_channelTreeCompleteness_of_productive
  D_0 j_0 realize code hclosed hbase hdist quantum semanticEnv
* cases hextern with
| lam x body left right hnoapp hadminBody _ _ hadminL hadminR =>
  exact
    closed_lam_extern_admin_noapp_presented_channelTreeCompleteness
      D_0 j_0 realize x body left right hclosed hnoapp hadminBody
        hadminL hadminR quantum semanticEnv
| recLam self x body left right hnoapp hadminBody _ _ hadminL hadminR =>
  exact
    closed_recLam_extern_admin_noapp_presented_channelTreeCompleteness
      D_0 j_0 realize self x body left right hclosed hnoapp hadminBody
        hadminL hadminR quantum semanticEnv

/-- Presented token adequacy for `ProductiveClosedCase`, including
`app (lam/recLam ...) (extern left right)` without a hand-written path
derivation. -/
theorem closed_term_presented_token_adequacy_of_productive_case
{C : Type}
(D_0 : QDomain.{0})
(j_0 : IsContinuousLatticeProjection D_0.carrier
  (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
(realize : C -> HSemanticValue D_0 j_0)
(code : Term (QubitPrimitive C))
(hclosed : Closed code)
(hcase : ProductiveClosedCase code)
(hdist : MeasureDistinct realize code)
(quantum : NormalizedDensity 2)
(semanticEnv : Env (HSemanticValue D_0 j_0))
(selectors : List Bool)
(? : HSemanticValue D_0 j_0 -> FiniteInstrumentComp 2 PUnit.{1})
(k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2))
(hk : forall d, k d = (? d).satisfiedTTTheory resultCode)
(i : Nat) (token : TTObservationToken 2) :
token in HardwareAdequacy.selectPath selectors
  (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv)
  i k <->
exists fuel, exists (tree : ChannelTree C
  (initialChannelConfig code quantum))
  (R : ChannelTreeRealization D_0 j_0 realize tree),
tree.depth <= fuel /\
ResultAvailable tree selectors i /\
TTObservationToken.Holds resultCode token
  ((restrictedInstrument D_0 j_0 realize tree R selectors i).bind
    ?) :=
presented_channel_tree_token_adequacy_iff D_0 j_0 realize
  (initialChannelConfig code quantum)
  (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv)

```

```

(closed_term_presented_channelTreeCompleteness_of_productive_case
  D_0 j_0 realize code hclosed hcase hdist quantum semanticEnv)
selectors ? k hk i token

example {C : Type} (x : Name) (bodyValue leftValue rightValue : C) :
  ProductiveClosedCase
    (.app (.lam x (.prim (.ret bodyValue)))
      (.extern (.prim (.ret leftValue)) (.prim (.ret rightValue)))) :=
  Or.inr (.lam x _ _ (by trivial) (by trivial) (.ret _) (.ret _)
    (by trivial) (by trivial))

example {C : Type} (self x : Name)
  (bodyValue leftValue rightValue : C) :
  ProductiveClosedCase
    (.app (.recLam self x (.prim (.ret bodyValue)))
      (.extern (.prim (.ret leftValue)) (.prim (.ret rightValue)))) :=
  Or.inr (.recLam self x _ _ (by trivial) (by trivial) (.ret _) (.ret _)
    (by trivial) (by trivial))

end HardwareChannelSemantics
end QLambda

```

A.25 QLambda/HardwareChannel/Spines.lean

9943 lines.

Lean 4 source (lines 1–400)

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/
import QLambda.HardwareChannel.Identity

/-!
# Fragment predicates and residual stack spines

Layer of the hardware channel-tree semantics. All layers share the
`QLambda.HardwareChannelSemantics` namespace; import
`QLambda.HardwareChannelSemantics` for the full module.
-/

set_option maxHeartbeats 800000

namespace QLambda
namespace HardwareChannelSemantics

open Matrix
open scoped ComplexOrder MatrixOrder

open HardwareOperational
open HardwareObservation
open HardwareAdequacy
open HardwareLogicalRelation
open TTPhysicalPrimitives
open TTPhysicalEmbedding
open TTContinuation
open Scott1972.ContinuousLattice

/-- Application-free terms: the closed lambda-and-choice fragment. -/
def NoApp {Prim : Type} : Term Prim -> Prop
| .app _ _ => False

```

```

| .lam _ M => NoApp M
| .recLam _ _ M => NoApp M
| .prob _ M N => NoApp M /\ NoApp N
| .intern M N => NoApp M /\ NoApp N
| .extern M N => NoApp M /\ NoApp N
| .var _ => True
| .prim _ => True

/-- Application-free terms that evaluate by identity CEK steps, intern,
probability, and Pauli-X. Measurement and extern change the physical
tree shape under a residual stack and are excluded here. -/
def AdminNoApp {C : Type} : Term (QubitPrimitive C) -> Prop
| .app _ _ => False
| .extern _ _ => False
| .prob _ M N => AdminNoApp M /\ AdminNoApp N
| .intern M N => AdminNoApp M /\ AdminNoApp N
| .var _ => True
| .lam _ _ => True
| .recLam _ _ _ => True
| .prim (.ret _) => True
| .prim (.pauliX _) => True
| .prim (.measureZ _ _) => False

/-- Body-nested and argument-nested lambda / recursive-lambda
applications. Stuck `app (ret c) M` is excluded: the function must be
a syntactic lambda or recursive lambda. Left-nested `app (app ...) ...`
is covered by `Produces`. -/
inductive FunAppFrag {C : Type} : Term (QubitPrimitive C) -> Prop
| admin {t : Term (QubitPrimitive C)} :
  AdminNoApp t -> FunAppFrag t
| app_lam {x : Name} {body arg : Term (QubitPrimitive C)} :
  FunAppFrag body ->
  FunAppFrag arg ->
  FunAppFrag (.app (.lam x body) arg)
| app_recLam {self x : Name} {body arg : Term (QubitPrimitive C)} :
  FunAppFrag body ->
  FunAppFrag arg ->
  FunAppFrag (.app (.recLam self x body) arg)

/-- Terms that absorb exactly `n` leftover argument frames without
getting stuck. `Produces 0` is FunAppFrag. A lambda or recursive
lambda raises the arity; an application consumes one arity if the
argument is in the FunAppFrag fragment (including admin NoApp). -/
inductive Produces {C : Type} : Nat -> Term (QubitPrimitive C) -> Prop
| frag {t : Term (QubitPrimitive C)} :
  FunAppFrag t -> Produces 0 t
| lam {n : Nat} {x : Name} {body : Term (QubitPrimitive C)} :
  Produces n body -> Produces (n + 1) (.lam x body)
| recLam {n : Nat} {self x : Name} {body : Term (QubitPrimitive C)} :
  Produces n body -> Produces (n + 1) (.recLam self x body)
| app {n : Nat} {fn arg : Term (QubitPrimitive C)} :
  Produces (n + 1) fn ->
  FunAppFrag arg ->
  Produces n (.app fn arg)

/-- After beta, a body may sit under `n` leftover argument frames.
Zero leftovers require an application-free body; each extra leftover
requires another lambda. -/
def BodyUnderArgs {C : Type} : Nat -> Term (QubitPrimitive C) -> Prop
| 0, t => NoApp t
| n + 1, t =>
  match t with
  | .lam _ b => BodyUnderArgs n b

```



```

| _ => False

/-- A lambda `lam x body` can absorb `n` leftover argument frames:
none means the closure is a value; otherwise the body sits under
`n - 1` leftovers. -/
def LamAbsorbs {C : Type} : Nat -> Term (QubitPrimitive C) -> Prop
| 0, _ => True
| n + 1, body => BodyUnderArgs n body

@[simp]
theorem BodyUnderArgs_zero {C : Type} {t : Term (QubitPrimitive C)} :
  BodyUnderArgs 0 t <-> NoApp t :=
  Iff.rfl

@[simp]
theorem BodyUnderArgs_succ_lam {C : Type} {n : Nat} {x : Name}
  {b : Term (QubitPrimitive C)} :
  BodyUnderArgs (n + 1) (.lam x b) <-> BodyUnderArgs n b :=
  Iff.rfl

theorem BodyUnderArgs_succ_inv {C : Type} {n : Nat}
  {t : Term (QubitPrimitive C)}
  (h : BodyUnderArgs (n + 1) t) :
  exists x b, t = .lam x b /\ BodyUnderArgs n b := by
cases t with
| lam x b => exact <x, b, rfl, h>
| app _ _ => cases h
| var _ => cases h
| recLam _ _ _ => cases h
| intern _ _ => cases h
| extern _ _ => cases h
| prob _ _ _ => cases h
| prim _ => cases h

@[simp]
theorem LamAbsorbs_zero {C : Type} {body : Term (QubitPrimitive C)} :
  LamAbsorbs 0 body <-> True :=
  Iff.rfl

@[simp]
theorem LamAbsorbs_succ {C : Type} {n : Nat}
  {body : Term (QubitPrimitive C)} :
  LamAbsorbs (n + 1) body <-> BodyUnderArgs n body :=
  Iff.rfl

/-- Residual argument frames waiting after a curried application. -/
def argumentStack {C : Type}
  (frames : List (Term (QubitPrimitive C) x RuntimeEnv C)) :
  EvalStack C :=
  frames.map fun p => .argument p.1 p.2

@[simp]
theorem argumentStack_nil {C : Type} :
  argumentStack ([] : List (Term (QubitPrimitive C) x RuntimeEnv C)) =
  [] :=
  rfl

@[simp]
theorem argumentStack_cons {C : Type}
  (arg : Term (QubitPrimitive C)) (callEnv : RuntimeEnv C)
  (rest : List (Term (QubitPrimitive C) x RuntimeEnv C)) :
  argumentStack ((arg, callEnv) :: rest) =
  .argument arg callEnv :: argumentStack rest :=

```

```

rfl

/-- Residual ordinary closure frames of a right-nested application. -/
def functionStack {C : Type}
  (frames : List (Name x Term (QubitPrimitive C) x RuntimeEnv C)) :
  EvalStack C :=
  frames.map fun p => .function (.closure p.1 p.2.1 p.2.2)

@[simp]
theorem functionStack_nil {C : Type} :
  functionStack
    ([] : List (Name x Term (QubitPrimitive C) x RuntimeEnv C)) =
    [] :=
  rfl

@[simp]
theorem functionStack_cons {C : Type} (x : Name)
  (body : Term (QubitPrimitive C)) (clo : RuntimeEnv C)
  (rest : List (Name x Term (QubitPrimitive C) x RuntimeEnv C)) :
  functionStack ((x, body, clo) :: rest) =
    .function (.closure x body clo) :: functionStack rest :=
  rfl

@[simp]
theorem functionStack_singleton {C : Type} (x : Name)
  (body : Term (QubitPrimitive C)) (clo : RuntimeEnv C) :
  functionStack [(x, body, clo)] =
    [.function (.closure x body clo)] :=
  rfl

/-- A nonempty right-nested closure spine: the last body is
application-free and every earlier body is administrative NoApp. -/
def FunctionSpineOk {C : Type} :
  List (Name x Term (QubitPrimitive C) x RuntimeEnv C) -> Prop
| [] => False
| [(_, body, _)] => NoApp body
| (_, body, _) :: y :: rest =>
  AdminNoApp body /\ FunctionSpineOk (y :: rest)

@[simp]
theorem FunctionSpineOk_nil {C : Type} :
  FunctionSpineOk
    ([] : List (Name x Term (QubitPrimitive C) x RuntimeEnv C)) =
    False :=
  rfl

@[simp]
theorem FunctionSpineOk_singleton {C : Type} {x : Name}
  {body : Term (QubitPrimitive C)} {clo : RuntimeEnv C} :
  FunctionSpineOk [(x, body, clo)] <=> NoApp body :=
  Iff.rfl

@[simp]
theorem FunctionSpineOk_cons_cons {C : Type} {x : Name}
  {body : Term (QubitPrimitive C)} {clo : RuntimeEnv C}
  {y : Name x Term (QubitPrimitive C) x RuntimeEnv C}
  {rest : List (Name x Term (QubitPrimitive C) x RuntimeEnv C)} :
  FunctionSpineOk ((x, body, clo) :: y :: rest) <=>
    AdminNoApp body /\ FunctionSpineOk (y :: rest) :=
  Iff.rfl

theorem FunctionSpineOk.ne_nil {C : Type}
  {frames : List (Name x Term (QubitPrimitive C) x RuntimeEnv C)}

```

```

    (h : FunctionSpineOk frames) : frames != [] := by
cases frames <;> simp_all

theorem functionStack_eq_nil_iff {C : Type}
  {frames : List (Name x Term (QubitPrimitive C) x RuntimeEnv C)} :
  functionStack frames = [] <-> frames = [] := by
cases frames <;> simp [functionStack]

theorem FunctionSpineOk.stack_ne_nil {C : Type}
  {frames : List (Name x Term (QubitPrimitive C) x RuntimeEnv C)}
  (h : FunctionSpineOk frames) : functionStack frames != [] := by
intro hs
exact h.ne_nil (functionStack_eq_nil_iff.mp hs)

theorem FunctionSpineOk.cons {C : Type} {x : Name}
  {body : Term (QubitPrimitive C)} {clo : RuntimeEnv C}
  {rest : List (Name x Term (QubitPrimitive C) x RuntimeEnv C)}
  (hne : rest != []) (hadmin : AdminNoApp body)
  (hok : FunctionSpineOk rest) :
  FunctionSpineOk ((x, body, clo) :: rest) := by
match rest, hne, hok with
| [], hne, _ => exact False.elim (hne rfl)
| y :: rest, _, hok => exact <hadmin, hok>

/-- Residual argument frames that evaluate by administrative NoApp. -/
def ArgumentFramesOk {C : Type}
  (args : List (Term (QubitPrimitive C) x RuntimeEnv C)) : Prop :=
forall p in args, AdminNoApp p.1

/-- Residual argument frames in the FunAppFrag fragment (stacked apps). -/
def FunAppFramesOk {C : Type}
  (args : List (Term (QubitPrimitive C) x RuntimeEnv C)) : Prop :=
forall p in args, FunAppFrag p.1

theorem FunAppFrag.of_admin {C : Type} {t : Term (QubitPrimitive C)}
  (h : AdminNoApp t) : FunAppFrag t :=
FunAppFrag.admin h

theorem FunAppFramesOk.of_argumentFramesOk {C : Type}
  {args : List (Term (QubitPrimitive C) x RuntimeEnv C)}
  (h : ArgumentFramesOk args) : FunAppFramesOk args :=
fun p hp => FunAppFrag.of_admin (h p hp)

/-- Ordinary or recursive closure frames pushed by FunAppFrag apps. -/
inductive FunFrame (C : Type) where
| clo (x : Name) (body : Term (QubitPrimitive C)) (env : RuntimeEnv C)
| recClo (self x : Name) (body : Term (QubitPrimitive C)) (env : RuntimeEnv C)

/-- Stack projection of a mixed ordinary/recursive function-frame spine. -/
def funFrameStack {C : Type} : List (FunFrame C) -> EvalStack C
| [] => []
| .clo x body env :: rest =>
  .function (.closure x body env) :: funFrameStack rest
| .recClo self x body env :: rest =>
  .function (.recClosure self x body env) :: funFrameStack rest

@[simp]
theorem funFrameStack_nil {C : Type} :
  funFrameStack ([] : List (FunFrame C)) = [] :=
rfl

@[simp]
theorem funFrameStack_clo_cons {C : Type} (x : Name)

```

```

    (body : Term (QubitPrimitive C)) (env : RuntimeEnv C)
    (rest : List (FunFrame C)) :
    funFrameStack (.clo x body env :: rest) =
      .function (.closure x body env) :: funFrameStack rest :=
rfl

@[simp]
theorem funFrameStack_recClo_cons {C : Type} (self x : Name)
  (body : Term (QubitPrimitive C)) (env : RuntimeEnv C)
  (rest : List (FunFrame C)) :
  funFrameStack (.recClo self x body env :: rest) =
    .function (.recClosure self x body env) :: funFrameStack rest :=
rfl

/-- Ordinary closure triples as FunFrame.clo frames. -/
def cloFrames {C : Type} :
  List (Name x Term (QubitPrimitive C) x RuntimeEnv C) ->
  List (FunFrame C)
| [] => []
| (x, body, env) :: rest => .clo x body env :: cloFrames rest

@[simp]
theorem cloFrames_nil {C : Type} :
  cloFrames
    ([] : List (Name x Term (QubitPrimitive C) x RuntimeEnv C)) =
    [] :=
rfl

@[simp]
theorem cloFrames_cons {C : Type} (x : Name)
  (body : Term (QubitPrimitive C)) (env : RuntimeEnv C)
  (rest : List (Name x Term (QubitPrimitive C) x RuntimeEnv C)) :
  cloFrames ((x, body, env) :: rest) =
    .clo x body env :: cloFrames rest :=
rfl

theorem funFrameStack_cloFrames {C : Type}
  (frames : List (Name x Term (QubitPrimitive C) x RuntimeEnv C)) :
  funFrameStack (cloFrames frames) = functionStack frames := by
  induction frames with
  | nil => rfl
  | cons p rest ih =>
    rcases p with <x, body, env>
    simp [cloFrames, functionStack, ih]

theorem funFrameStack_ne_nil_of_cons {C : Type}
  (f : FunFrame C) (rest : List (FunFrame C)) :
  funFrameStack (f :: rest) != [] := by
  cases f <;> simp [funFrameStack]

/-- A function-frame spine over leftover argument frames. -/
def mixedStack {C : Type}
  (fns : List (Name x Term (QubitPrimitive C) x RuntimeEnv C))
  (args : List (Term (QubitPrimitive C) x RuntimeEnv C)) :
  EvalStack C :=
  functionStack fns ++ argumentStack args

theorem funFrameStack_cloFrames_append_args {C : Type}
  (fns : List (Name x Term (QubitPrimitive C) x RuntimeEnv C))
  (args : List (Term (QubitPrimitive C) x RuntimeEnv C)) :
  funFrameStack (cloFrames fns) ++ argumentStack args =
    mixedStack fns args := by
  simp [mixedStack, funFrameStack_cloFrames]

```

```

theorem funFrameStack_cloFrames_recClo_append_args {C : Type}
  (fns : List (Name x Term (QubitPrimitive C) x RuntimeEnv C))
  (self x : Name) (body : Term (QubitPrimitive C))
  (env : RuntimeEnv C)
  (args : List (Term (QubitPrimitive C) x RuntimeEnv C)) :
  funFrameStack
    (cloFrames fns ++ [.recClo self x body env]) ++
    argumentStack args =
  functionStack fns ++
    (.function (.recClosure self x body env) ::
      argumentStack args) := by
  induction fns with
  | nil => simp [cloFrames, functionStack, funFrameStack]
  | cons p rest ih =>
    rcases p with <y, M, clo>
    simp [cloFrames, functionStack, funFrameStack, ih]

@[simp]
theorem mixedStack_nil_fns {C : Type}
  (args : List (Term (QubitPrimitive C) x RuntimeEnv C)) :
  mixedStack [] args = argumentStack args :=
  rfl

@[simp]
theorem mixedStack_cons {C : Type} (x : Name)
  (body : Term (QubitPrimitive C)) (clo : RuntimeEnv C)
  (fns : List (Name x Term (QubitPrimitive C) x RuntimeEnv C))
  (args : List (Term (QubitPrimitive C) x RuntimeEnv C)) :
  mixedStack ((x, body, clo) :: fns) args =
    .function (.closure x body clo) :: mixedStack fns args :=
  rfl

@[simp]
theorem mixedStack_singleton {C : Type} (x : Name)
  (body : Term (QubitPrimitive C)) (clo : RuntimeEnv C)
  (args : List (Term (QubitPrimitive C) x RuntimeEnv C)) :
  mixedStack [(x, body, clo)] args =
    .function (.closure x body clo) :: argumentStack args :=
  rfl

/-- Nonempty function spine over leftover argument frames: earlier
function bodies are administrative NoApp; the last body absorbs the
leftover arguments. -/
def MixedSpineOk {C : Type} :
  List (Name x Term (QubitPrimitive C) x RuntimeEnv C) ->
  List (Term (QubitPrimitive C) x RuntimeEnv C) -> Prop
| [], _ => False
| [(_, body, _)], args => BodyUnderArgs args.length body
| (_, body, _) :: y :: rest, args =>

Lean 4 source (lines 401–800)

AdminNoApp body /\ MixedSpineOk (y :: rest) args

@[simp]
theorem MixedSpineOk_nil {C : Type}
  {args : List (Term (QubitPrimitive C) x RuntimeEnv C)} :
  MixedSpineOk
    ([] : List (Name x Term (QubitPrimitive C) x RuntimeEnv C))
    args = False :=
  rfl

@[simp]

```

```

theorem MixedSpineOk_singleton {C : Type} {x : Name}
  {body : Term (QubitPrimitive C)} {clo : RuntimeEnv C}
  {args : List (Term (QubitPrimitive C) x RuntimeEnv C)} :
  MixedSpineOk [(x, body, clo)] args <=>
    BodyUnderArgs args.length body :=
  Iff.rfl

@[simp]
theorem MixedSpineOk_cons_cons {C : Type} {x : Name}
  {body : Term (QubitPrimitive C)} {clo : RuntimeEnv C}
  {y : Name x Term (QubitPrimitive C) x RuntimeEnv C}
  {rest : List (Name x Term (QubitPrimitive C) x RuntimeEnv C)}
  {args : List (Term (QubitPrimitive C) x RuntimeEnv C)} :
  MixedSpineOk ((x, body, clo) :: y :: rest) args <=>
    AdminNoApp body /\ MixedSpineOk (y :: rest) args :=
  Iff.rfl

theorem MixedSpineOk_ne_nil {C : Type}
  {fns : List (Name x Term (QubitPrimitive C) x RuntimeEnv C)}
  {args : List (Term (QubitPrimitive C) x RuntimeEnv C)}
  (h : MixedSpineOk fns args) : fns != [] := by
  cases fns <;> simp_all

theorem mixedStack_ne_nil {C : Type}
  {fns : List (Name x Term (QubitPrimitive C) x RuntimeEnv C)}
  {args : List (Term (QubitPrimitive C) x RuntimeEnv C)}
  (hne : fns != []) : mixedStack fns args != [] := by
  match fns with
  | [] => exact False.elim (hne rfl)
  | (x, body, clo) :: rest =>
    rw [mixedStack_cons]
    exact List.cons_ne_nil _ _

theorem MixedSpineOk_stack_ne_nil {C : Type}
  {fns : List (Name x Term (QubitPrimitive C) x RuntimeEnv C)}
  {args : List (Term (QubitPrimitive C) x RuntimeEnv C)}
  (h : MixedSpineOk fns args) : mixedStack fns args != [] :=
  mixedStack_ne_nil h.ne_nil

theorem MixedSpineOk_cons {C : Type} {x : Name}
  {body : Term (QubitPrimitive C)} {clo : RuntimeEnv C}
  {fns : List (Name x Term (QubitPrimitive C) x RuntimeEnv C)}
  {args : List (Term (QubitPrimitive C) x RuntimeEnv C)}
  (hne : fns != []) (hadmin : AdminNoApp body)
  (hok : MixedSpineOk fns args) :
  MixedSpineOk ((x, body, clo) :: fns) args := by
  match fns, hne, hok with
  | [], hne, _ => exact False.elim (hne rfl)
  | y :: rest, _, hok => exact <hadmin, hok>

/-- After leftover argument frames are absorbed, the residual body is
an earlier function-spine body (`AdminNoApp`), not the last `NoApp`
body. -/
def BodyUnderArgsThenAdmin {C : Type} :
  Nat -> Term (QubitPrimitive C) -> Prop
| 0, t => AdminNoApp t
| n + 1, t =>
  match t with
  | .lam _ b => BodyUnderArgsThenAdmin n b
  | _ => False

/-- A lambda `lam x body` can absorb `n` leftover argument frames
before a residual function-frame spine. -/

```

```

def LamAbsorbsThenAdmin {C : Type} :
  Nat -> Term (QubitPrimitive C) -> Prop
| 0, _ => True
| n + 1, body => BodyUnderArgsThenAdmin n body

@[simp]
theorem BodyUnderArgsThenAdmin_zero {C : Type}
  {t : Term (QubitPrimitive C)} :
  BodyUnderArgsThenAdmin 0 t <-> AdminNoApp t :=
  Iff.rfl

@[simp]
theorem BodyUnderArgsThenAdmin_succ_lam {C : Type} {n : Nat}
  {x : Name} {b : Term (QubitPrimitive C)} :
  BodyUnderArgsThenAdmin (n + 1) (.lam x b) <->
  BodyUnderArgsThenAdmin n b :=
  Iff.rfl

theorem BodyUnderArgsThenAdmin_succ_inv {C : Type} {n : Nat}
  {t : Term (QubitPrimitive C)}
  (h : BodyUnderArgsThenAdmin (n + 1) t) :
  exists x b, t = .lam x b /\ BodyUnderArgsThenAdmin n b := by
cases t with
| lam x b => exact <x, b, rfl, h>
| app _ _ => cases h
| var _ => cases h
| recLam _ _ _ => cases h
| intern _ _ => cases h
| extern _ _ => cases h
| prob _ _ _ => cases h
| prim _ => cases h

@[simp]
theorem LamAbsorbsThenAdmin_zero {C : Type}
  {body : Term (QubitPrimitive C)} :
  LamAbsorbsThenAdmin 0 body <-> True :=
  Iff.rfl

@[simp]
theorem LamAbsorbsThenAdmin_succ {C : Type} {n : Nat}
  {body : Term (QubitPrimitive C)} :
  LamAbsorbsThenAdmin (n + 1) body <->
  BodyUnderArgsThenAdmin n body :=
  Iff.rfl

/-- Leftover argument frames over a residual function-frame spine. -/
def argumentThenFunctionStack {C : Type}
  (args : List (Term (QubitPrimitive C) x RuntimeEnv C))
  (rest : List (Name x Term (QubitPrimitive C) x RuntimeEnv C)) :
  EvalStack C :=
  argumentStack args ++ functionStack rest

@[simp]
theorem argumentThenFunctionStack_nil {C : Type}
  (rest : List (Name x Term (QubitPrimitive C) x RuntimeEnv C)) :
  argumentThenFunctionStack [] rest = functionStack rest :=
  rfl

@[simp]
theorem argumentThenFunctionStack_cons {C : Type}
  (arg : Term (QubitPrimitive C)) (callEnv : RuntimeEnv C)
  (args : List (Term (QubitPrimitive C) x RuntimeEnv C))
  (rest : List (Name x Term (QubitPrimitive C) x RuntimeEnv C)) :

```

```

    argumentThenFunctionStack ((arg, callEnv) :: args) rest =
      .argument arg callEnv :: argumentThenFunctionStack args rest :=
rfl

/-- A function-frame spine over leftover arguments over a residual
function-frame spine. -/
def mixedThenFunctionStack {C : Type}
  (fns : List (Name x Term (QubitPrimitive C) x RuntimeEnv C))
  (args : List (Term (QubitPrimitive C) x RuntimeEnv C))
  (rest : List (Name x Term (QubitPrimitive C) x RuntimeEnv C)) :
  EvalStack C :=
  functionStack fns ++ argumentThenFunctionStack args rest

@[simp]
theorem mixedThenFunctionStack_nil_fns {C : Type}
  (args : List (Term (QubitPrimitive C) x RuntimeEnv C))
  (rest : List (Name x Term (QubitPrimitive C) x RuntimeEnv C)) :
  mixedThenFunctionStack [] args rest =
    argumentThenFunctionStack args rest :=
rfl

@[simp]
theorem mixedThenFunctionStack_cons {C : Type} (x : Name)
  (body : Term (QubitPrimitive C)) (clo : RuntimeEnv C)
  (fns : List (Name x Term (QubitPrimitive C) x RuntimeEnv C))
  (args : List (Term (QubitPrimitive C) x RuntimeEnv C))
  (rest : List (Name x Term (QubitPrimitive C) x RuntimeEnv C)) :
  mixedThenFunctionStack ((x, body, clo) :: fns) args rest =
    .function (.closure x body clo) ::
      mixedThenFunctionStack fns args rest :=
rfl

@[simp]
theorem mixedThenFunctionStack_singleton {C : Type} (x : Name)
  (body : Term (QubitPrimitive C)) (clo : RuntimeEnv C)
  (args : List (Term (QubitPrimitive C) x RuntimeEnv C))
  (rest : List (Name x Term (QubitPrimitive C) x RuntimeEnv C)) :
  mixedThenFunctionStack [(x, body, clo)] args rest =
    .function (.closure x body clo) ::
      argumentThenFunctionStack args rest :=
rfl

/-- Nonempty leading function spine over leftover arguments over a
residual function-frame spine. The last leading body absorbs leftover
arguments into `AdminNoApp`; earlier leading bodies are
`AdminNoApp`. -/
def MixedThenFnOk {C : Type} :
  List (Name x Term (QubitPrimitive C) x RuntimeEnv C) ->
  List (Term (QubitPrimitive C) x RuntimeEnv C) ->
  List (Name x Term (QubitPrimitive C) x RuntimeEnv C) -> Prop
| [], _, _ => False
| [_, body, _], args, rest =>
  BodyUnderArgsThenAdmin args.length body /\ FunctionSpineOk rest
| (_, body, _) :: y :: restFns, args, rest =>
  AdminNoApp body /\ MixedThenFnOk (y :: restFns) args rest

@[simp]
theorem MixedThenFnOk_nil {C : Type}
  {args : List (Term (QubitPrimitive C) x RuntimeEnv C)}
  {rest : List (Name x Term (QubitPrimitive C) x RuntimeEnv C)} :
  MixedThenFnOk
    ([] : List (Name x Term (QubitPrimitive C) x RuntimeEnv C))
    args rest = False :=

```



```

rfl

@[simp]
theorem MixedThenFnOk_singleton {C : Type} {x : Name}
  {body : Term (QubitPrimitive C)} {clo : RuntimeEnv C}
  {args : List (Term (QubitPrimitive C) x RuntimeEnv C)}
  {rest : List (Name x Term (QubitPrimitive C) x RuntimeEnv C)} :
  MixedThenFnOk [(x, body, clo)] args rest <=>
    BodyUnderArgsThenAdmin args.length body /\
    FunctionSpineOk rest :=
  Iff.rfl

@[simp]
theorem MixedThenFnOk_cons_cons {C : Type} {x : Name}
  {body : Term (QubitPrimitive C)} {clo : RuntimeEnv C}
  {y : Name x Term (QubitPrimitive C) x RuntimeEnv C}
  {restFns : List (Name x Term (QubitPrimitive C) x RuntimeEnv C)}
  {args : List (Term (QubitPrimitive C) x RuntimeEnv C)}
  {rest : List (Name x Term (QubitPrimitive C) x RuntimeEnv C)} :
  MixedThenFnOk ((x, body, clo) :: y :: restFns) args rest <=>
    AdminNoApp body /\ MixedThenFnOk (y :: restFns) args rest :=
  Iff.rfl

theorem MixedThenFnOk.ne_nil {C : Type}
  {fns : List (Name x Term (QubitPrimitive C) x RuntimeEnv C)}
  {args : List (Term (QubitPrimitive C) x RuntimeEnv C)}
  {rest : List (Name x Term (QubitPrimitive C) x RuntimeEnv C)}
  (h : MixedThenFnOk fns args rest) : fns != [] := by
  cases fns <;> simp_all

theorem mixedThenFunctionStack_ne_nil {C : Type}
  {fns : List (Name x Term (QubitPrimitive C) x RuntimeEnv C)}
  {args : List (Term (QubitPrimitive C) x RuntimeEnv C)}
  {rest : List (Name x Term (QubitPrimitive C) x RuntimeEnv C)}
  (hne : fns != []) : mixedThenFunctionStack fns args rest != [] := by
  match fns with
  | [] => exact False.elim (hne rfl)
  | (x, body, clo) :: restFns =>
    rw [mixedThenFunctionStack_cons]
    exact List.cons_ne_nil _ _

theorem MixedThenFnOk.stack_ne_nil {C : Type}
  {fns : List (Name x Term (QubitPrimitive C) x RuntimeEnv C)}
  {args : List (Term (QubitPrimitive C) x RuntimeEnv C)}
  {rest : List (Name x Term (QubitPrimitive C) x RuntimeEnv C)}
  (h : MixedThenFnOk fns args rest) :
  mixedThenFunctionStack fns args rest != [] :=
  mixedThenFunctionStack_ne_nil h.ne_nil

theorem MixedThenFnOk.cons {C : Type} {x : Name}
  {body : Term (QubitPrimitive C)} {clo : RuntimeEnv C}
  {fns : List (Name x Term (QubitPrimitive C) x RuntimeEnv C)}
  {args : List (Term (QubitPrimitive C) x RuntimeEnv C)}
  {rest : List (Name x Term (QubitPrimitive C) x RuntimeEnv C)}
  (hne : fns != []) (hadmin : AdminNoApp body)
  (hok : MixedThenFnOk fns args rest) :
  MixedThenFnOk ((x, body, clo) :: fns) args rest := by
  match fns, hne, hok with
  | [], hne, _ => exact False.elim (hne rfl)
  | y :: restFns, _, hok => exact <hadmin, hok>

theorem empty_env_closed_wellScoped {C : Type}
  {s : ChannelConfig C} {code : Term (QubitPrimitive C)}

```

```

(hclosed : Closed code)
(hc : s.control = .term code) (he : s.env = [])
(hs : s.stack = []) :
ChannelConfig.WellScoped s := by
refine <?_, ?_>
* rw [hc, he]
  exact <RuntimeEnv.wellScoped_nil, fun x hx =>
    False.elim ((closed_iff_forall_not_mem.mp hclosed x) hx)>
* intro frame hf
  rw [hs] at hf
  cases hf

/-- A return at any empty stack is the identity wrap of its payload. -/
theorem return_empty_presentedChannelTreeCompleteness {C : Type}
(D_0 : QDomain.{0})
(j_0 : IsContinuousLatticeProjection D_0.carrier
  (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
(realize : C -> HSemanticValue D_0 j_0)
{s : ChannelConfig C} {value : C}
(hc : s.control = .term (.prim (.ret value)))
(hs : s.stack = [])
(hscoped : ChannelConfig.WellScoped s)
{semanticEnv : Env (HSemanticValue D_0 j_0)}
(_henv : EnvRel D_0 j_0 realize s.env semanticEnv) :
PresentedChannelTreeCompleteness D_0 j_0 realize s
(interp (hardwarePrimitive D_0 j_0 realize)
  (.prim (.ret value)) semanticEnv) := by
let t : ChannelConfig C :=
{s with control := .value (.payload value)}
have hstep : ChannelInternalStep s t := by
  have happ :
    ChannelInternalStep
      {s with control := .term (.prim (.ret value))} t :=
    ChannelInternalStep.returnPrimitive (s := s) (value := value)
  have hsrc : s = {s with control := .term (.prim (.ret value))} :=
    ChannelConfig.ext hc rfl rfl rfl
  exact hsrc.symm |> happ
have hchildScoped : ChannelConfig.WellScoped t :=
  ChannelInternalStep.preserve_wellScoped hstep hscoped
have hchildRel : ChannelConfigRel D_0 j_0 realize t
  (semanticUnit (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0) (realize value)) := by
  refine <semanticUnit (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0) (realize value), id, ?_, ?_, rfl>
* exact ControlRel.value _ _ t.env
  (payload_related D_0 j_0 realize value)
* change StackRel D_0 j_0 realize s.stack id
  rw [hs]
  exact StackRel.nil
have hchild : PresentedChannelTreeCompleteness D_0 j_0 realize t
  (semanticUnit (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0) (realize value)) :=
  terminal_presentedChannelTreeCompleteness D_0 j_0 realize
  (s := t) <.payload value, rfl, hs> hchildScoped hchildRel
simp [hardwarePrimitive_ret]
exact identity_step_presentedChannelTreeCompleteness D_0 j_0 realize
  hstep (by simp [channelInternalOperation, hc])
  (fun h' => ChannelConfig.ext
    (ChannelInternalStep.eq_of_return h' hc).1
    (ChannelInternalStep.eq_of_return h' hc).2.1
    (ChannelInternalStep.eq_of_return h' hc).2.2.1
    (ChannelInternalStep.eq_of_return h' hc).2.2.2)
  hchild

```

```

/-- Wrap a left intern child at an arbitrary source with definitional
intern control. -/
def wrapInternLeftAt {C : Type} (s : ChannelConfig C)
  (left right : Term (QubitPrimitive C))
  (child : ChannelTree C {s with control := .term left}) :
  ChannelTree C {s with control := .term (.intern left right)} :=
ChannelTree.internal
  (ChannelInternalStep.internalLeft
    (s := {s with control := .term (.intern left right)}))
  child

def wrapInternRightAt {C : Type} (s : ChannelConfig C)
  (left right : Term (QubitPrimitive C))
  (child : ChannelTree C {s with control := .term right}) :
  ChannelTree C {s with control := .term (.intern left right)} :=
ChannelTree.internal
  (ChannelInternalStep.internalRight
    (s := {s with control := .term (.intern left right)}))
  child

theorem wrapInternLeftAt_depth {C : Type} (s : ChannelConfig C)
  (left right : Term (QubitPrimitive C))
  (child : ChannelTree C {s with control := .term left}) :
  (wrapInternLeftAt s left right child).depth = child.depth + 1 :=
rfl

theorem wrapInternRightAt_depth {C : Type} (s : ChannelConfig C)
  (left right : Term (QubitPrimitive C))
  (child : ChannelTree C {s with control := .term right}) :
  (wrapInternRightAt s left right child).depth = child.depth + 1 :=
rfl

/-- Internal choice at an empty stack is the join of presented children
that keep the same environment, stack, and quantum state. -/
theorem intern_empty_presentedChannelTreeCompleteness {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (s : ChannelConfig C)
  (left right : Term (QubitPrimitive C))
  (semanticEnv : Env (HSemanticValue D_0 j_0))
  (hleft : PresentedChannelTreeCompleteness D_0 j_0 realize
    {s with control := .term left}
    (interp (hardwarePrimitive D_0 j_0 realize) left semanticEnv))
  (hright : PresentedChannelTreeCompleteness D_0 j_0 realize
    {s with control := .term right}
    (interp (hardwarePrimitive D_0 j_0 realize) right semanticEnv)) :
PresentedChannelTreeCompleteness D_0 j_0 realize
  {s with control := .term (.intern left right)}
  (interp (hardwarePrimitive D_0 j_0 realize) (.intern left right)
    semanticEnv) where
selected_result_eq_channelTree_sup_presented := by
intro selectors i ? k hk
rw [selectPath_intern,
  hleft.selected_result_eq_channelTree_sup_presented selectors i ? k hk,
  hright.selected_result_eq_channelTree_sup_presented selectors i ? k hk]
have hop :
  channelInternalOperation
    {s with control := .term (.intern left right)} =
  QuantumOperation.identity 2 :=
rfl

```

```

refine le_antisymm ?_ ?_
* apply sup_le
* apply sSup_le
  rintro T <fuel, child, R, hdepth, rfl>
  apply le_sSup
  refine <fuel + 1, wrapInternLeftAt s left right child,
    wrapInternalRealization D_0 j_0 realize
      (ChannelInternalStep.internalLeft
        (s := {s with control := .term (.intern left right)}))
        child R, ?_, ?_>
  * simp [wrapInternLeftAt_depth] using Nat.succ_le_succ hdepth

```

Lean 4 source (lines 801–1200)

```

* exact
  (restrictedResult_internal_of_identity D_0 j_0 realize
    (ChannelInternalStep.internalLeft
      (s := {s with control := .term (.intern left right)}))
    hop child
    (wrapInternalRealization D_0 j_0 realize
      (ChannelInternalStep.internalLeft
        (s := {s with control := .term (.intern left right)}))
        child R)
    selectors i k).symm
* apply sSup_le
  rintro T <fuel, child, R, hdepth, rfl>
  apply le_sSup
  refine <fuel + 1, wrapInternRightAt s left right child,
    wrapInternalRealization D_0 j_0 realize
      (ChannelInternalStep.internalRight
        (s := {s with control := .term (.intern left right)}))
        child R, ?_, ?_>
  * simp [wrapInternRightAt_depth] using Nat.succ_le_succ hdepth
* exact
  (restrictedResult_internal_of_identity D_0 j_0 realize
    (ChannelInternalStep.internalRight
      (s := {s with control := .term (.intern left right)}))
    hop child
    (wrapInternalRealization D_0 j_0 realize
      (ChannelInternalStep.internalRight
        (s := {s with control := .term (.intern left right)}))
        child R)
    selectors i k).symm
* apply sSup_le
  rintro T <_, tree, R, _, rfl>
  have hctrl :
    ({s with control := .term (.intern left right)}).control =
      .term (.intern left right) :=
    rfl
  cases tree with
  | terminal hterm =>
    have := hterm.control_eq.symm.trans hctrl
    cases this
  | @internal _ t h next =>
    rcases ChannelInternalStep.eq_of_intern h hctrl with ht | ht
    * cases ht
    have := restrictedResult_internal_of_identity D_0 j_0 realize
      h hop next R selectors i k
    rw [this]
    apply le_sup_of_le_left
    apply le_sSup
    exact <next.depth, next,
      internalChildRealization D_0 j_0 realize h next R,
      le_rfl, rfl>

```

```

* cases ht
  have := restrictedResult_internal_of_identity D_0 j_0 realize
    h hop next R selectors i k
  rw [this]
  apply le_sup_of_le_right
  apply le_sSup
  exact <next.depth, next,
    internalChildRealization D_0 j_0 realize h next R,
    le_rfl, rfl>
| external _ hex _ =>
  exact False.elim (ChannelExternalStep.not_intern hex hctrl)

/-- Internal choice under an arbitrary stack continuation. The continuation
must preserve intern, which every `StackRel` continuation does. -/
theorem intern_stacked_presentedChannelTreeCompleteness {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (s : ChannelConfig C)
  (left right : Term (QubitPrimitive C))
  (semanticEnv : Env (HSemanticValue D_0 j_0))
  (k : HSemanticComp D_0 j_0 -> HSemanticComp D_0 j_0)
  (hk : forall q r, k (HasComputationChoice.intern (q, r)) =
    HasComputationChoice.intern (k q, k r))
  (hleft : PresentedChannelTreeCompleteness D_0 j_0 realize
    {s with control := .term left})
  (k (interp (hardwarePrimitive D_0 j_0 realize) left semanticEnv)))
  (hright : PresentedChannelTreeCompleteness D_0 j_0 realize
    {s with control := .term right})
  (k (interp (hardwarePrimitive D_0 j_0 realize) right semanticEnv))) :
  PresentedChannelTreeCompleteness D_0 j_0 realize
  {s with control := .term (.intern left right)}
  (k (interp (hardwarePrimitive D_0 j_0 realize) (.intern left right)
    semanticEnv)) where
selected_result_eq_channelTree_sup_presented := by
  intro selectors i ? k? hk?
  rw [interp_intern_apply, hk,
    selectPath_computation_intern D_0 j_0,
    hleft.selected_result_eq_channelTree_sup_presented
    selectors i ? k? hk?,
    hright.selected_result_eq_channelTree_sup_presented
    selectors i ? k? hk?]
  have hop :
    channelInternalOperation
    {s with control := .term (.intern left right)} =
    QuantumOperation.identity 2 :=
  rfl
  refine le_antisymm ?_ ?_
* apply sup_le
* apply sSup_le
  rintro T <fuel, child, R, hdepth, rfl>
  apply le_sSup
  refine <fuel + 1, wrapInternLeftAt s left right child,
    wrapInternalRealization D_0 j_0 realize
    (ChannelInternalStep.internalLeft
      (s := {s with control := .term (.intern left right)}))
    child R, ?_, ?_>
* simpa [wrapInternLeftAt_depth] using Nat.succ_le_succ hdepth
* exact
  (restrictedResult_internal_of_identity D_0 j_0 realize
    (ChannelInternalStep.internalLeft
      (s := {s with control := .term (.intern left right)})))

```

```

        hop child
        (wrapInternalRealization D_0 j_0 realize
          (ChannelInternalStep.internalLeft
            (s := {s with control := .term (.intern left right)}))
          child R)
        selectors i k?).symm
* apply sSup_le
rintro T <fuel, child, R, hdepth, rfl>
apply le_sSup
refine <fuel + 1, wrapInternRightAt s left right child,
  wrapInternalRealization D_0 j_0 realize
    (ChannelInternalStep.internalRight
      (s := {s with control := .term (.intern left right)}))
  child R, ?_, ?_>
* simp [wrapInternRightAt_depth] using Nat.succ_le_succ hdepth
* exact
  (restrictedResult_internal_of_identity D_0 j_0 realize
    (ChannelInternalStep.internalRight
      (s := {s with control := .term (.intern left right)}))
    hop child
    (wrapInternalRealization D_0 j_0 realize
      (ChannelInternalStep.internalRight
        (s := {s with control := .term (.intern left right)}))
      child R)
    selectors i k?).symm
* apply sSup_le
rintro T <_, tree, R, _, rfl>
have hctrl :
  ({s with control := .term (.intern left right)}).control =
  .term (.intern left right) :=
  rfl
cases tree with
| terminal hterm =>
  have := hterm.control_eq.symm.trans hctrl
  cases this
| @internal _ t h next =>
  rcases ChannelInternalStep.eq_of_intern h hctrl with ht | ht
  * cases ht
  have := restrictedResult_internal_of_identity D_0 j_0 realize
    h hop next R selectors i k?
  rw [this]
  apply le_sup_of_le_left
  apply le_sSup
  exact <next.depth, next,
    internalChildRealization D_0 j_0 realize h next R,
    le_rfl, rfl>
  * cases ht
  have := restrictedResult_internal_of_identity D_0 j_0 realize
    h hop next R selectors i k?
  rw [this]
  apply le_sup_of_le_right
  apply le_sSup
  exact <next.depth, next,
    internalChildRealization D_0 j_0 realize h next R,
    le_rfl, rfl>
| external _ hex _ =>
  exact False.elim (ChannelExternalStep.not_intern hex hctrl)

/-- Wrap a completed child under one external-selection node at an
arbitrary source with definitional extern control. -/
def wrapExternAt {C : Type} (s : ChannelConfig C) (b : Bool)
  (left right : Term (QubitPrimitive C))
  (child : ChannelTree C

```

```

    {s with control := .term (if b then right else left))} :
  ChannelTree C {s with control := .term (.extern left right)} :=
ChannelTree.external b
  (by
    cases b
    * exact ChannelExternalStep.selectFalse
      (s := {s with control := .term (.extern left right)})
    * exact ChannelExternalStep.selectTrue
      (s := {s with control := .term (.extern left right)}))
  child

theorem wrapExternAt_depth {C : Type} (s : ChannelConfig C) (b : Bool)
  (left right : Term (QubitPrimitive C))
  (child : ChannelTree C
    {s with control := .term (if b then right else left)}) :
  (wrapExternAt s b left right child).depth = child.depth + 1 :=
rfl

theorem external_cons_channelTreeSup_at {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (s : ChannelConfig C)
  (left right : Term (QubitPrimitive C))
  (b : Bool) (selectors : List Bool) (i : Nat)
  (k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)) :
  sSup (channelTreeResults D_0 j_0 realize
    {s with control := .term (.extern left right)}
    (b :: selectors) i k) =
  sSup (channelTreeResults D_0 j_0 realize
    {s with control := .term (if b then right else left)}
    selectors i k) := by
let source := {s with control := .term (.extern left right)}
let target := {s with control := .term (if b then right else left)}
have hb : ChannelExternalStep source b target := by
  cases b
  * exact ChannelExternalStep.selectFalse
    (s := {s with control := .term (.extern left right)})
  * exact ChannelExternalStep.selectTrue
    (s := {s with control := .term (.extern left right)})
apply le_antisymm
* apply sSup_le
  rintro T <_, tree, R, _, rfl>
  have hctrl : source.control = .term (.extern left right) := rfl
  cases tree with
  | terminal hterm =>
    have := hterm.control_eq.symm.trans hctrl
    cases this
  | internal h _ =>
    exact False.elim (ChannelInternalStep.not_extern h hctrl)
  | external c h next =>
    have ht := ChannelExternalStep.eq_of_extern h hctrl
    cases b <|> cases c
    * cases ht
      rw [restrictedResult_external_cons]
      apply le_sSup
      exact <next.depth, next,
        externalChildRealization D_0 j_0 realize false h next R, le_rfl, rfl>
    * rw [restrictedResult_external_mismatch D_0 j_0 realize true false
      (by decide) h next R selectors i k]
      exact bot_le
    * rw [restrictedResult_external_mismatch D_0 j_0 realize false true

```

```

        (by decide) h next R selectors i k]
    exact bot_le
* cases ht
    rw [restrictedResult_external_cons]
    apply le_sSup
    exact <next.depth, next,
        externalChildRealization D_0 j_0 realize true h next R, le_rfl, rfl>
* apply sSup_le
    rintro T <fuel, child, R, hdepth, rfl>
    apply le_sSup
    refine <fuel + 1, ChannelTree.external b hb child,
        wrapExternalRealization D_0 j_0 realize b hb child R, ?_, ?_>
* change child.depth + 1 <= fuel + 1
    omega
* rw [restrictedResult_external_cons]
    rfl

theorem external_coordinate_channelTreeSup_at {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (s : ChannelConfig C)
  (left right : Term (QubitPrimitive C))
  (b : Bool) (j : Nat)
  (k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)) :
  sSup (channelTreeResults D_0 j_0 realize
    {s with control := .term (.extern left right)}) []
    (HardwareAdequacy.branchCoordinate b j) k) =
  sSup (channelTreeResults D_0 j_0 realize
    {s with control := .term (if b then right else left)}) [] j k) := by
let source := {s with control := .term (.extern left right)}
let target := {s with control := .term (if b then right else left)}
have hb : ChannelExternalStep source b target := by
  cases b
  * exact ChannelExternalStep.selectFalse
    (s := {s with control := .term (.extern left right)})
  * exact ChannelExternalStep.selectTrue
    (s := {s with control := .term (.extern left right)})
apply le_antisymm
* apply sSup_le
    rintro T <_, tree, R, _, rfl>
    have hctrl : source.control = .term (.extern left right) := rfl
    cases tree with
    | terminal hterm =>
        have := hterm.control_eq.symm.trans hctrl
        cases this
    | internal h _ =>
        exact False.elim (ChannelInternalStep.not_extern h hctrl)
    | external c h next =>
        have ht := ChannelExternalStep.eq_of_extern h hctrl
        cases b <;> cases c
        * cases ht
            rw [restrictedResult_external_coordinate]
            apply le_sSup
            exact <next.depth, next,
                externalChildRealization D_0 j_0 realize false h next R, le_rfl, rfl>
        * rw [restrictedResult_external_coordinate_mismatch D_0 j_0 realize
            true false (by decide) h next R j k]
            exact bot_le
        * rw [restrictedResult_external_coordinate_mismatch D_0 j_0 realize
            false true (by decide) h next R j k]
            exact bot_le

```



```

      * cases ht
      rw [restrictedResult_external_coordinate]
      apply le_sSup
      exact <next.depth, next,
        externalChildRealization D_0 j_0 realize true h next R, le_rfl, rfl>
* apply sSup_le
rintro T <fuel, child, R, hdepth, rfl>
apply le_sSup
refine <fuel + 1, ChannelTree.external b hb child,
  wrapExternalRealization D_0 j_0 realize b hb child R, ?_, ?_>
* change child.depth + 1 <= fuel + 1
  omega
* rw [restrictedResult_external_coordinate]
  rfl

theorem external_root_channelTreeSup_at {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (s : ChannelConfig C)
  (left right : Term (QubitPrimitive C))
  (k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)) :
  sSup (channelTreeResults D_0 j_0 realize
    {s with control := .term (.extern left right)}) [] 0 k) = False := by
  apply le_antisymm
* apply sSup_le
rintro T <_, tree, R, _, rfl>
have hctrl :
  ({s with control := .term (.extern left right)}).control =
    .term (.extern left right) := rfl
cases tree with
| terminal hterm =>
  have := hterm.control_eq.symm.trans hctrl
  cases this
| internal h _ =>
  exact False.elim (ChannelInternalStep.not_extern h hctrl)
| external _ h next =>
  rw [restrictedResult_external_root]
* exact bot_le

/-- External choice at an empty stack is the selected child-tree supremum. -/
theorem extern_empty_presentedChannelTreeCompleteness {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (s : ChannelConfig C)
  (left right : Term (QubitPrimitive C))
  (semanticEnv : Env (HSemanticValue D_0 j_0))
  (hleft : PresentedChannelTreeCompleteness D_0 j_0 realize
    {s with control := .term left})
  (interp (hardwarePrimitive D_0 j_0 realize) left semanticEnv)
  (hright : PresentedChannelTreeCompleteness D_0 j_0 realize
    {s with control := .term right})
  (interp (hardwarePrimitive D_0 j_0 realize) right semanticEnv)) :
  PresentedChannelTreeCompleteness D_0 j_0 realize
    {s with control := .term (.extern left right)}
    (interp (hardwarePrimitive D_0 j_0 realize) (.extern left right)
      semanticEnv) where
  selected_result_eq_channelTree_sup_presented := by
  intro selectors i ? k hk
  cases selectors with

```

```

| cons b selectors =>
  rw [selectPath_extern_cons]
  cases b
  * simp only [Bool.false_eq_true, if_false]
    rw [hleft.selected_result_eq_channelTree_sup_presented
        selectors i ? k hk,
        external_cons_channelTreeSup_at]
    simp
  * simp only [if_true]
    rw [hright.selected_result_eq_channelTree_sup_presented
        selectors i ? k hk,
        external_cons_channelTreeSup_at]
    simp
| nil =>
  cases i with
  | zero =>
    rw [HardwareAdequacy.selectPath_nil, interp_extern_apply,
        external_root_channelTreeSup_at]
    change (TTContinuation.externalChoice
      (interp (hardwarePrimitive D_0 j_0 realize) left semanticEnv,
        interp (hardwarePrimitive D_0 j_0 realize) right semanticEnv)
      0) k = False
    rw [TTContinuation.externalChoice_root_bot]
    exact ScottMap.bot_apply k
  | succ n =>
    by_cases heven : n % 2 = 0
    * have hi : n + 1 =
        HardwareAdequacy.branchCoordinate false (n / 2) := by
      simp [HardwareAdequacy.branchCoordinate]
      omega
    rw [hi, HardwareAdequacy.selectPath_nil,
        selectPath_extern_coordinate]
    simp only [Bool.false_eq_true, if_false]
    have hc :=
      hleft.selected_result_eq_channelTree_sup_presented

```

Lean 4 source (lines 1201–1600)

```

[] (n / 2) ? k hk
have hc' :
  interp (hardwarePrimitive D_0 j_0 realize) left semanticEnv
  (n / 2) k =
  sSup (channelTreeResults D_0 j_0 realize
    {s with control := .term left} [] (n / 2) k) := by
  simpa using hc
exact hc'.trans
  (external_coordinate_channelTreeSup_at D_0 j_0 realize s
    left right false (n / 2) k).symm
* have hodd : n % 2 = 1 := by omega
have hi : n + 1 =
  HardwareAdequacy.branchCoordinate true (n / 2) := by
  simp [HardwareAdequacy.branchCoordinate]
  omega
rw [hi, HardwareAdequacy.selectPath_nil,
    selectPath_extern_coordinate]
simp only [if_true]
have hc :=
  hright.selected_result_eq_channelTree_sup_presented
  [] (n / 2) ? k hk
have hc' :
  interp (hardwarePrimitive D_0 j_0 realize) right semanticEnv
  (n / 2) k =
  sSup (channelTreeResults D_0 j_0 realize
    {s with control := .term right} [] (n / 2) k) := by

```

```

      simp using hc
    exact hc'.trans
      (external_coordinate_channelTreeSup_at D_0 j_0 realize s
        left right true (n / 2) k).symm

/-- External choice under a stack continuation that commutes with
selection and is strict at the unresolved root. Ordinary Kleisli
stack frames are root-strict; they commute with selection precisely
when their unfoldings are coordinate-constant. -/
theorem extern_stacked_presentedChannelTreeCompleteness {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (s : ChannelConfig C)
  (left right : Term (QubitPrimitive C))
  (semanticEnv : Env (HSemanticValue D_0 j_0))
  (k : HSemanticComp D_0 j_0 -> HSemanticComp D_0 j_0)
  (hcommute :
    forall selected,
      TTContinuation.selectBranch selected
        (k (interp (hardwarePrimitive D_0 j_0 realize)
          (.extern left right) semanticEnv)) =
        k (TTContinuation.selectBranch selected
          (interp (hardwarePrimitive D_0 j_0 realize)
            (.extern left right) semanticEnv)))
  (hroot :
    k (interp (hardwarePrimitive D_0 j_0 realize) (.extern left right)
      semanticEnv) 0 =
      False)
  (hleft : PresentedChannelTreeCompleteness D_0 j_0 realize
    {s with control := .term left}
    (k (interp (hardwarePrimitive D_0 j_0 realize) left semanticEnv)))
  (hright : PresentedChannelTreeCompleteness D_0 j_0 realize
    {s with control := .term right}
    (k (interp (hardwarePrimitive D_0 j_0 realize) right semanticEnv))) :
  PresentedChannelTreeCompleteness D_0 j_0 realize
    {s with control := .term (.extern left right)}
    (k (interp (hardwarePrimitive D_0 j_0 realize) (.extern left right)
      semanticEnv)) where
selected_result_eq_channelTree_sup_presented := by
  intro selectors i ? k? hk
  cases selectors with
  | cons b selectors =>
    rw [HardwareAdequacy.selectPath_cons, hcommute,
      interp_extern_apply]
    cases b
    * rw [TTContinuation.computation_extern_select_false]
      rw [hleft.selected_result_eq_channelTree_sup_presented
        selectors i ? k? hk,
        external_cons_channelTreeSup_at]
      simp
    * rw [TTContinuation.computation_extern_select_true]
      rw [hright.selected_result_eq_channelTree_sup_presented
        selectors i ? k? hk,
        external_cons_channelTreeSup_at]
      simp
  | nil =>
    cases i with
    | zero =>
      rw [HardwareAdequacy.selectPath_nil, hroot,
        external_root_channelTreeSup_at]
      exact ScottMap.bot_apply

```

```

(D := ScottMap (HSemanticValue D_0 j_0) (TTResult 2))
(D' := TTResult 2) k?
| succ n =>
  by_cases heven : n % 2 = 0
  * have hi : n + 1 =
      HardwareAdequacy.branchCoordinate false (n / 2) := by
        simp [HardwareAdequacy.branchCoordinate]
        omega
    have hsel :
      TTContinuation.selectBranch false
        (k (interp (hardwarePrimitive D_0 j_0 realize)
          (.extern left right) semanticEnv))
        (n / 2) =
        k (interp (hardwarePrimitive D_0 j_0 realize)
          (.extern left right) semanticEnv)
        (n + 1) := by
      rw [hi]
      rfl
    have hchild :
      k (interp (hardwarePrimitive D_0 j_0 realize)
        (.extern left right) semanticEnv)
        (n + 1) k? =
      k (interp (hardwarePrimitive D_0 j_0 realize) left
        semanticEnv) (n / 2) k? := by
      rw [ <- hsel, hcommute, interp_extern_apply,
        TTContinuation.computation_extern_select_false]
    have hc :=
      hleft.selected_result_eq_channelTree_sup_presented
      [] (n / 2) ? k? hk
    have hc' :
      k (interp (hardwarePrimitive D_0 j_0 realize) left
        semanticEnv) (n / 2) k? =
      sSup (channelTreeResults D_0 j_0 realize
        {s with control := .term left} [] (n / 2) k?) := by
      simpa using hc
    rw [HardwareAdequacy.selectPath_nil, hchild, hc', hi]
    exact
      (external_coordinate_channelTreeSup_at D_0 j_0 realize s
        left right false (n / 2) k?).symm
  * have hodd : n % 2 = 1 := by omega
    have hi : n + 1 =
      HardwareAdequacy.branchCoordinate true (n / 2) := by
        simp [HardwareAdequacy.branchCoordinate]
        omega
    have hsel :
      TTContinuation.selectBranch true
        (k (interp (hardwarePrimitive D_0 j_0 realize)
          (.extern left right) semanticEnv))
        (n / 2) =
        k (interp (hardwarePrimitive D_0 j_0 realize)
          (.extern left right) semanticEnv)
        (n + 1) := by
      rw [hi]
      rfl
    have hchild :
      k (interp (hardwarePrimitive D_0 j_0 realize)
        (.extern left right) semanticEnv)
        (n + 1) k? =
      k (interp (hardwarePrimitive D_0 j_0 realize) right
        semanticEnv) (n / 2) k? := by
      rw [ <- hsel, hcommute, interp_extern_apply,
        TTContinuation.computation_extern_select_true]
    have hc :=

```

```

    hright.selected_result_eq_channelTree_sup_presented
      [] (n / 2) ? k? hk
  have hc' :
    k (interp (hardwarePrimitive D_0 j_0 realize) right
      semanticEnv) (n / 2) k? =
      sSup (channelTreeResults D_0 j_0 realize
        {s with control := .term right} [] (n / 2) k?) := by
        simpa using hc
  rw [HardwareAdequacy.selectPath_nil, hchild, hc', hi]
  exact
    (external_coordinate_channelTreeSup_at D_0 j_0 realize s
      left right true (n / 2) k?).symm

noncomputable def wrapProbAt {C : Type} {p : ?} (hp_0 : 0 < p) (hp_1 : p < 1)
  (s : ChannelConfig C)
  (left right : Term (QubitPrimitive C))
  (leftChild : ChannelTree C)
  { s with
    control := .term left
    quantum := applyOperation
      (sourceProbabilityOperation p hp_0.le hp_1.le) s.quantum }
  (rightChild : ChannelTree C)
  { s with
    control := .term right
    quantum := applyOperation
      (sourceProbabilityOperation (1 - p)
        (sub_nonneg.mpr hp_1.le) (by linarith)) s.quantum } :
  ChannelTree C {s with control := .term (.prob p left right)} :=
  ChannelTree.probability (s := s) hp_0 hp_1 leftChild rightChild

noncomputable def wrapProbZeroAt {C : Type} (s : ChannelConfig C)
  (left right : Term (QubitPrimitive C))
  (rightChild : ChannelTree C)
  { s with
    control := .term right
    quantum := applyOperation
      (sourceProbabilityOperation 1 zero_le_one (le_refl 1))
      s.quantum } :
  ChannelTree C {s with control := .term (.prob 0 left right)} :=
  ChannelTree.probabilityZero (s := s) (left := left) rightChild

noncomputable def wrapProbOneAt {C : Type} (s : ChannelConfig C)
  (left right : Term (QubitPrimitive C))
  (leftChild : ChannelTree C)
  { s with
    control := .term left
    quantum := applyOperation
      (sourceProbabilityOperation 1 zero_le_one (le_refl 1))
      s.quantum } :
  ChannelTree C {s with control := .term (.prob 1 left right)} :=
  ChannelTree.probabilityOne (s := s) (right := right) leftChild

theorem wrapProbAt_depth {C : Type} {p : ?} (hp_0 : 0 < p) (hp_1 : p < 1)
  (s : ChannelConfig C)
  (left right : Term (QubitPrimitive C))
  (leftChild : ChannelTree C)
  { s with
    control := .term left
    quantum := applyOperation
      (sourceProbabilityOperation p hp_0.le hp_1.le) s.quantum }
  (rightChild : ChannelTree C)
  { s with
    control := .term right

```

```

    quantum := applyOperation
      (sourceProbabilityOperation (1 - p)
        (sub_nonneg.mpr hp_1.le) (by linarith)) s.quantum }) :
    (wrapProbAt hp_0 hp_1 s left right leftChild rightChild).depth =
      max leftChild.depth rightChild.depth + 1 :=
rfl

theorem wrapProbZeroAt_depth {C : Type} (s : ChannelConfig C)
  (left right : Term (QubitPrimitive C))
  (rightChild : ChannelTree C)
  { s with
    control := .term right
    quantum := applyOperation
      (sourceProbabilityOperation 1 zero_le_one (le_refl 1))
      s.quantum }) :
  (wrapProbZeroAt s left right rightChild).depth =
    rightChild.depth + 1 :=
rfl

theorem wrapProbOneAt_depth {C : Type} (s : ChannelConfig C)
  (left right : Term (QubitPrimitive C))
  (leftChild : ChannelTree C)
  { s with
    control := .term left
    quantum := applyOperation
      (sourceProbabilityOperation 1 zero_le_one (le_refl 1))
      s.quantum }) :
  (wrapProbOneAt s left right leftChild).depth =
    leftChild.depth + 1 :=
rfl

theorem prob_zero_empty_presentedChannelTreeCompleteness {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C → HSemanticValue D_0 j_0)
  (s : ChannelConfig C)
  (left right : Term (QubitPrimitive C))
  (semanticEnv : Env (HSemanticValue D_0 j_0))
  (hright : PresentedChannelTreeCompleteness D_0 j_0 realize
    {s with control := .term right}
    (interp (hardwarePrimitive D_0 j_0 realize) right semanticEnv)) :
  PresentedChannelTreeCompleteness D_0 j_0 realize
    {s with control := .term (.prob 0 left right)}
    (interp (hardwarePrimitive D_0 j_0 realize) (.prob 0 left right)
      semanticEnv) where
selected_result_eq_channelTree_sup_presented := by
  intro selectors i ? k hk
  have hright' :=
    PresentedChannelTreeCompleteness.congr
      (show
        { s with
          control := .term right
          quantum := applyOperation
            (sourceProbabilityOperation 1 zero_le_one (le_refl 1))
            s.quantum } =
          {s with control := .term right} from
          ChannelConfig.ext rfl rfl rfl
          (applyOperation_sourceProbability_one s.quantum)).symm
        rfl hright
      rw [selectPath_prob_zero,
        hright'.selected_result_eq_channelTree_sup_presented
          selectors i ? k hk]

```

```

apply le_antisymm
* apply sSup_le
  rintro T <fuel, child, R, hdepth, rfl>
  apply le_sSup
  refine <fuel + 1, wrapProbZeroAt s left right child,
    wrapProbabilityZeroRealization D_0 j_0 realize
    (s := s) (leftTerm := left) (rightTerm := right) child R, ?_, ?_>
* simpa [wrapProbZeroAt_depth] using Nat.succ_le_succ hdepth
* exact
  (restrictedResult_probabilityZero D_0 j_0 realize child
    (wrapProbabilityZeroRealization D_0 j_0 realize
      (s := s) (leftTerm := left) (rightTerm := right) child R)
    selectors i k).symm
* apply sSup_le
  rintro T <_, tree, R, _, rfl>
  exact restrictedResult_of_control_prob_zero D_0 j_0 realize tree R rfl
  selectors i k

theorem prob_one_empty_presentedChannelTreeCompleteness {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C → HSemanticValue D_0 j_0)
  (s : ChannelConfig C)
  (left right : Term (QubitPrimitive C))
  (semanticEnv : Env (HSemanticValue D_0 j_0))
  (hleft : PresentedChannelTreeCompleteness D_0 j_0 realize
    {s with control := .term left}
    (interp (hardwarePrimitive D_0 j_0 realize) left semanticEnv)) :
  PresentedChannelTreeCompleteness D_0 j_0 realize
    {s with control := .term (.prob 1 left right)}
    (interp (hardwarePrimitive D_0 j_0 realize) (.prob 1 left right)
      semanticEnv) where
selected_result_eq_channelTree_sup_presented := by
  intro selectors i ? k hk
  have hleft' :=
    PresentedChannelTreeCompleteness.congr
      (show
        { s with
          control := .term left
          quantum := applyOperation
            (sourceProbabilityOperation 1 zero_le_one (le_refl 1))
            s.quantum } =
          {s with control := .term left} from
          ChannelConfig.ext rfl rfl rfl
          (applyOperation_sourceProbability_one s.quantum)).symm
        rfl hleft
      rw [selectPath_prob_one,
        hleft'.selected_result_eq_channelTree_sup_presented
          selectors i ? k hk]
  apply le_antisymm
* apply sSup_le
  rintro T <fuel, child, R, hdepth, rfl>
  apply le_sSup
  refine <fuel + 1, wrapProbOneAt s left right child,
    wrapProbabilityOneRealization D_0 j_0 realize
    (s := s) (leftTerm := left) (rightTerm := right) child R, ?_, ?_>
* simpa [wrapProbOneAt_depth] using Nat.succ_le_succ hdepth
* exact
  (restrictedResult_probabilityOne D_0 j_0 realize child
    (wrapProbabilityOneRealization D_0 j_0 realize
      (s := s) (leftTerm := left) (rightTerm := right) child R)
    selectors i k).symm

```

```

* apply sSup_le
rintro T <_, tree, R, _, rfl>
exact restrictedResult_of_control_prob_one D_0 j_0 realize tree R rfl
selectors i k

theorem prob_invalid_empty_presentedChannelTreeCompleteness {C : Type}
(D_0 : QDomain.{0})
(j_0 : IsContinuousLatticeProjection D_0.carrier
  (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
(realize : C -> HSemanticValue D_0 j_0)
(s : ChannelConfig C)
(p : ?) (hp : not (0 <= p /\ p <= 1))
(left right : Term (QubitPrimitive C))
(semanticEnv : Env (HSemanticValue D_0 j_0)) :
PresentedChannelTreeCompleteness D_0 j_0 realize
{ s with control := .term (.prob p left right) }
(interp (hardwarePrimitive D_0 j_0 realize) (.prob p left right)
  semanticEnv) where
selected_result_eq_channelTree_sup_presented := by
intro selectors i ? k hk
have hbot :
  HardwareAdequacy.selectPath selectors
    (interp (hardwarePrimitive D_0 j_0 realize) (.prob p left right)
      semanticEnv) i k = False := by
  rw [selectPath_prob, TTContinuation.probChoice_apply, dif_neg hp]
rw [hbot]
apply le_antisymm
* exact bot_le
* apply sSup_le
rintro T <_, tree, R, _, rfl>
exact False.elim
  (no_channelTree_of_invalid_prob tree rfl hp)

theorem prob_empty_presented_of_presented_children {C : Type}
(D_0 : QDomain.{0})
(j_0 : IsContinuousLatticeProjection D_0.carrier
  (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
(realize : C -> HSemanticValue D_0 j_0)
(s : ChannelConfig C)
(p : ?) (hp_0 : 0 < p) (hp_1 : p < 1)
(left right : Term (QubitPrimitive C))
(semanticEnv : Env (HSemanticValue D_0 j_0))
(hleft : PresentedChannelTreeCompleteness D_0 j_0 realize
  { s with
    control := .term left
    quantum := applyOperation
      (sourceProbabilityOperation p hp_0.le hp_1.le) s.quantum }
  (interp (hardwarePrimitive D_0 j_0 realize) left semanticEnv))
(hright : PresentedChannelTreeCompleteness D_0 j_0 realize
  { s with
    control := .term right
    quantum := applyOperation
      (sourceProbabilityOperation (1 - p)
        (sub_nonneg.mpr hp_1.le) (by linarith)) s.quantum }
  (interp (hardwarePrimitive D_0 j_0 realize) right semanticEnv)) :
PresentedChannelTreeCompleteness D_0 j_0 realize
{ s with control := .term (.prob p left right) }
(interp (hardwarePrimitive D_0 j_0 realize) (.prob p left right)
  semanticEnv) where

```

Lean 4 source (lines 1601–2000)

```

selected_result_eq_channelTree_sup_presented := by
intro selectors i ? k hk

```



```

have hpI : 0 <= p /\ p <= 1 := <hp_0.le, hp_1.le>
rw [selectPath_prob, TTContinuation.probChoice_apply, dif_pos hpI,
  hleft.selected_result_eq_channelTree_sup_presented selectors i ? k hk,
  hright.selected_result_eq_channelTree_sup_presented selectors i ? k hk]
let SL :=
  channelTreeResults D_0 j_0 realize
  { s with
    control := .term left
    quantum := applyOperation
      (sourceProbabilityOperation p hp_0.le hp_1.le) s.quantum }
  selectors i k
let SR :=
  channelTreeResults D_0 j_0 realize
  { s with
    control := .term right
    quantum := applyOperation
      (sourceProbabilityOperation (1 - p)
        (sub_nonneg.mpr hp_1.le) (by linarith)) s.quantum }
  selectors i k
refine le_antisymm ?_ ?_
* by_cases hL : SL.Nonempty
* by_cases hR : SR.Nonempty
* rw [TTWeightedAggregation.weightedResultScott_sSup_product
  p hp_0.le hp_1.le SL SR hL hR]
  apply sSup_le
  rintro _ <<TL, TR>, <<fuelL, leftT, leftR, hdepthL, rfl>,
    <fuelR, rightT, rightR, hdepthR, rfl>>, rfl>
  apply le_sSup
  refine <max fuelL fuelR + 1,
    wrapProbAt hp_0 hp_1 s left right leftT rightT,
    wrapProbabilityRealization D_0 j_0 realize hp_0 hp_1 leftT rightT
      leftR rightR, ?_, ?_>
* simp [wrapProbAt_depth]
  omega
* exact
  (restrictedResult_probability_presented D_0 j_0 realize hp_0 hp_1
    leftT rightT
    (wrapProbabilityRealization D_0 j_0 realize hp_0 hp_1
      leftT rightT leftR rightR)
    selectors i ? k hk).symm
* have hbot :
  TTWeightedAggregation.weightedResultScott p hp_0.le hp_1.le
    (sSup SL, sSup SR) = False := by
  have : sSup SR = False := by
    have hempty : SR = {} :=
      Set.not_nonempty_iff_eq_empty.mp hR
    rw [hempty, sSup_empty]
  rw [this, TTWeightedAggregation.weightedResultScott_bot_right
    p hp_0 hp_1]
  rw [hbot]
  exact bot_le
* have hbot :
  TTWeightedAggregation.weightedResultScott p hp_0.le hp_1.le
    (sSup SL, sSup SR) = False := by
  have : sSup SL = False := by
    have hempty : SL = {} :=
      Set.not_nonempty_iff_eq_empty.mp hL
    rw [hempty, sSup_empty]
  rw [this, TTWeightedAggregation.weightedResultScott_bot_left
    p hp_0 hp_1]
  rw [hbot]
  exact bot_le
* apply sSup_le

```

```

    rintro T <_, tree, R, _, rfl>
    exact restrictedResult_of_control_prob_presented D_0 j_0 realize tree R
      hp_0 hp_1 rfl selectors i ? k hk

theorem prob_zero_stacked_presentedChannelTreeCompleteness {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C → HSemanticValue D_0 j_0)
  (s : ChannelConfig C)
  (left right : Term (QubitPrimitive C))
  (semanticEnv : Env (HSemanticValue D_0 j_0))
  (k : HSemanticComp D_0 j_0 → HSemanticComp D_0 j_0)
  (hk : forall q r,
    k (HasComputationChoice.prob 0 (q, r)) =
      HasComputationChoice.prob 0 (k q, k r))
  (hright : PresentedChannelTreeCompleteness D_0 j_0 realize
    {s with control := .term right}
    (k (interp (hardwarePrimitive D_0 j_0 realize) right semanticEnv))) :
  PresentedChannelTreeCompleteness D_0 j_0 realize
    {s with control := .term (.prob 0 left right)}
    (k (interp (hardwarePrimitive D_0 j_0 realize) (.prob 0 left right)
      semanticEnv)) where
selected_result_eq_channelTree_sup_presented := by
  intro selectors i ? k? hk?
  have hright' :=
    PresentedChannelTreeCompleteness.congr
      (show
        { s with
          control := .term right
          quantum := applyOperation
            (sourceProbabilityOperation 1 zero_le_one (le_refl 1))
            s.quantum } =
          {s with control := .term right} from
          ChannelConfig.ext rfl rfl rfl
          (applyOperation_sourceProbability_one s.quantum)).symm
        rfl hright
      rw [interp_prob_apply, hk, selectPath_computation_prob D_0 j_0,
        TTEContinuation.probChoice_zero,
        hright'.selected_result_eq_channelTree_sup_presented
          selectors i ? k? hk?]
  apply le_antisymm
  * apply sSup_le
    rintro T <fuel, child, R, hdepth, rfl>
    apply le_sSup
    refine <fuel + 1, wrapProbZeroAt s left right child,
      wrapProbabilityZeroRealization D_0 j_0 realize
        (s := s) (leftTerm := left) (rightTerm := right) child R, ?_, ?_>
  * simpa [wrapProbZeroAt_depth] using Nat.succ_le_succ hdepth
  * exact
    (restrictedResult_probabilityZero D_0 j_0 realize child
      (wrapProbabilityZeroRealization D_0 j_0 realize
        (s := s) (leftTerm := left) (rightTerm := right) child R)
      selectors i k?).symm
  * apply sSup_le
    rintro T <_, tree, R, _, rfl>
    exact restrictedResult_of_control_prob_zero D_0 j_0 realize tree R rfl
      selectors i k?

theorem prob_one_stacked_presentedChannelTreeCompleteness {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))

```

```

(realize : C -> HSemanticValue D_0 j_0)
(s : ChannelConfig C)
(left right : Term (QubitPrimitive C))
(semanticEnv : Env (HSemanticValue D_0 j_0))
(k : HSemanticComp D_0 j_0 -> HSemanticComp D_0 j_0)
(hk : forall q r,
  k (HasComputationChoice.prob 1 (q, r)) =
    HasComputationChoice.prob 1 (k q, k r))
(hleft : PresentedChannelTreeCompleteness D_0 j_0 realize
  {s with control := .term left}
  (k (interp (hardwarePrimitive D_0 j_0 realize) left semanticEnv))) :
PresentedChannelTreeCompleteness D_0 j_0 realize
  {s with control := .term (.prob 1 left right)}
  (k (interp (hardwarePrimitive D_0 j_0 realize) (.prob 1 left right)
    semanticEnv)) where
selected_result_eq_channelTree_sup_presented := by
intro selectors i ? k? hk?
have hleft' :=
  PresentedChannelTreeCompleteness.congr
    (show
      { s with
        control := .term left
        quantum := applyOperation
          (sourceProbabilityOperation 1 zero_le_one (le_refl 1))
          s.quantum } =
        {s with control := .term left} from
        ChannelConfig.ext rfl rfl rfl
        (applyOperation_sourceProbability_one s.quantum)).symm
      rfl hleft
  rw [interp_prob_apply, hk, selectPath_computation_prob D_0 j_0,
    TTContinuation.probChoice_one,
    hleft'.selected_result_eq_channelTree_sup_presented
      selectors i ? k? hk?]
  apply le_antisymm
* apply sSup_le
  rintro T <fuel, child, R, hdepth, rfl>
  apply le_sSup
  refine <fuel + 1, wrapProbOneAt s left right child,
    wrapProbabilityOneRealization D_0 j_0 realize
    (s := s) (leftTerm := left) (rightTerm := right) child R, ?_, ?_>
* simpa [wrapProbOneAt_depth] using Nat.succ_le_succ hdepth
* exact
  (restrictedResult_probabilityOne D_0 j_0 realize child
    (wrapProbabilityOneRealization D_0 j_0 realize
      (s := s) (leftTerm := left) (rightTerm := right) child R)
    selectors i k?).symm
* apply sSup_le
  rintro T <_, tree, R, _, rfl>
  exact restrictedResult_of_control_prob_one D_0 j_0 realize tree R rfl
  selectors i k?

theorem prob_invalid_stacked_presentedChannelTreeCompleteness {C : Type}
(D_0 : QDomain.{0})
(j_0 : IsContinuousLatticeProjection D_0.carrier
  (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
(realize : C -> HSemanticValue D_0 j_0)
(s : ChannelConfig C)
(p : ?) (hp : not (0 <= p /\ p <= 1))
(left right : Term (QubitPrimitive C))
(semanticEnv : Env (HSemanticValue D_0 j_0))
(k : HSemanticComp D_0 j_0 -> HSemanticComp D_0 j_0)
(hk : forall q r,
  k (HasComputationChoice.prob p (q, r)) =

```

```

      HasComputationChoice.prob p (k q, k r)) :
PresentedChannelTreeCompleteness D_0 j_0 realize
  {s with control := .term (.prob p left right)}
  (k (interp (hardwarePrimitive D_0 j_0 realize) (.prob p left right)
    semanticEnv)) where
selected_result_eq_channelTree_sup_presented := by
intro selectors i ? k? hk?
have hbot :
  HardwareAdequacy.selectPath selectors
    (k (interp (hardwarePrimitive D_0 j_0 realize)
      (.prob p left right) semanticEnv)) i k? = False := by
  rw [interp_prob_apply, hk, selectPath_computation_prob D_0 j_0,
    TTContinuation.probChoice_apply, dif_neg hp]
rw [hbot]
apply le_antisymm
* exact bot_le
* apply sSup_le
  rintro T <_, tree, R, _, rfl>
  exact False.elim
    (no_channelTree_of_invalid_prob tree rfl hp)

theorem prob_stacked_presented_of_presented_children {C : Type}
(D_0 : QDomain.{0})
(j_0 : IsContinuousLatticeProjection D_0.carrier
  (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
(realize : C → HSemanticValue D_0 j_0)
(s : ChannelConfig C)
(p : ?) (hp_0 : 0 < p) (hp_1 : p < 1)
(left right : Term (QubitPrimitive C))
(semanticEnv : Env (HSemanticValue D_0 j_0))
(k : HSemanticComp D_0 j_0 → HSemanticComp D_0 j_0)
(hk : forall q r,
  k (HasComputationChoice.prob p (q, r)) =
    HasComputationChoice.prob p (k q, k r))
(hleft : PresentedChannelTreeCompleteness D_0 j_0 realize
  { s with
    control := .term left
    quantum := applyOperation
      (sourceProbabilityOperation p hp_0.le hp_1.le) s.quantum }
  (k (interp (hardwarePrimitive D_0 j_0 realize) left semanticEnv)))
(hright : PresentedChannelTreeCompleteness D_0 j_0 realize
  { s with
    control := .term right
    quantum := applyOperation
      (sourceProbabilityOperation (1 - p)
        (sub_nonneg.mpr hp_1.le) (by linarith)) s.quantum }
  (k (interp (hardwarePrimitive D_0 j_0 realize) right semanticEnv)))) :
PresentedChannelTreeCompleteness D_0 j_0 realize
  {s with control := .term (.prob p left right)}
  (k (interp (hardwarePrimitive D_0 j_0 realize) (.prob p left right)
    semanticEnv)) where
selected_result_eq_channelTree_sup_presented := by
intro selectors i ? k? hk?
have hpI : 0 <= p /\ p <= 1 := <hp_0.le, hp_1.le>
rw [interp_prob_apply, hk, selectPath_computation_prob D_0 j_0,
  TTContinuation.probChoice_apply, dif_pos hpI,
  hleft.selected_result_eq_channelTree_sup_presented
    selectors i ? k? hk?,
  hright.selected_result_eq_channelTree_sup_presented
    selectors i ? k? hk?]
let SL :=
  channelTreeResults D_0 j_0 realize
  { s with

```

```

    control := .term left
    quantum := applyOperation
      (sourceProbabilityOperation p hp_0.le hp_1.le) s.quantum }
  selectors i k?
let SR :=
  channelTreeResults D_0 j_0 realize
  { s with
    control := .term right
    quantum := applyOperation
      (sourceProbabilityOperation (1 - p)
        (sub_nonneg.mpr hp_1.le) (by linarith)) s.quantum }
  selectors i k?
refine le_antisymm ?_ ?_
* by_cases hL : SL.Nonempty
* by_cases hR : SR.Nonempty
* rw [TTWeightedAggregation.weightedResultScott_sSup_product
  p hp_0.le hp_1.le SL SR hL hR]
  apply sSup_le
  rintro _ <<TL, TR>, <<fuelL, leftT, leftR, hdepthL, rfl>,
    <fuelR, rightT, rightR, hdepthR, rfl>>, rfl>
  apply le_sSup
  refine <max fuelL fuelR + 1,
    wrapProbAt hp_0 hp_1 s left right leftT rightT,
    wrapProbabilityRealization D_0 j_0 realize hp_0 hp_1 leftT rightT
      leftR rightR, ?_, ?_>
* simp [wrapProbAt_depth]
  omega
* exact
  (restrictedResult_probability_presented D_0 j_0 realize hp_0 hp_1
    leftT rightT
    (wrapProbabilityRealization D_0 j_0 realize hp_0 hp_1
      leftT rightT leftR rightR)
    selectors i ? k? hk?).symm
* have hbot :
  TTWeightedAggregation.weightedResultScott p hp_0.le hp_1.le
    (sSup SL, sSup SR) = False := by
  have : sSup SR = False := by
  have hempty : SR = {} :=
    Set.not_nonempty_iff_eq_empty.mp hR
  rw [hempty, sSup_empty]
  rw [this, TTWeightedAggregation.weightedResultScott_bot_right
    p hp_0 hp_1]
  rw [hbot]
  exact bot_le
* have hbot :
  TTWeightedAggregation.weightedResultScott p hp_0.le hp_1.le
    (sSup SL, sSup SR) = False := by
  have : sSup SL = False := by
  have hempty : SL = {} :=
    Set.not_nonempty_iff_eq_empty.mp hL
  rw [hempty, sSup_empty]
  rw [this, TTWeightedAggregation.weightedResultScott_bot_left
    p hp_0 hp_1]
  rw [hbot]
  exact bot_le
* apply sSup_le
  rintro T <_, tree, R, _, rfl>
  exact restrictedResult_of_control_prob_presented D_0 j_0 realize tree R
    hp_0 hp_1 rfl selectors i ? k? hk?

/-- Pauli-X at an empty stack, with definitional primitive control. -/
noncomputable def pauliXTreeAt {C : Type} (s : ChannelConfig C) (value : C)
  (hs : s.stack = []) :

```

```

    ChannelTree C {s with control := .term (.prim (.pauliX value))} :=
ChannelTree.internal
  (ChannelInternalStep.pauliXPrimitive
    (s := {s with control := .term (.prim (.pauliX value))}))
  (ChannelTree.terminal
    { value := .payload value, control_eq := rfl, stack_eq := hs })

theorem pauliXTreeAt_depth {C : Type} (s : ChannelConfig C) (value : C)
  (hs : s.stack = []) :
  (pauliXTreeAt s value hs).depth = 1 :=
rfl

noncomputable def pauliXTreeAtRealization {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C → HSemanticValue D_0 j_0)
  (s : ChannelConfig C) (value : C) (hs : s.stack = []) :
  ChannelTreeRealization D_0 j_0 realize (pauliXTreeAt s value hs) where
value := payloadLeafValue D_0 j_0 realize
related := by
  intro o
  rcases o with <<>, <>>
  exact ValueRel.payload value

theorem pauliXTreeAt_leaf_payload {C : Type} (s : ChannelConfig C)
  (value : C) (hs : s.stack = [])
  (o : (pauliXTreeAt s value hs).instrument.Outcome) :
  ((pauliXTreeAt s value hs).instrument.value o).isTerminal.value =
  .payload value := by
  rcases o with <<>, <>>
  rfl

theorem pauliXTreeAt_compatible {C : Type} (s : ChannelConfig C)
  (value : C) (hs : s.stack = []) (selectors : List Bool) (i : Nat)
  (o : (pauliXTreeAt s value hs).instrument.Outcome) :
  OutcomeCompatible (pauliXTreeAt s value hs) selectors i o := by
  rcases o with <<>, <>>
  simp [OutcomeCompatible, ChannelTree.instrument]
  exact List.nil_prefix

theorem pauliXTreeAt_realized_eq_ofOperation {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C → HSemanticValue D_0 j_0)
  (s : ChannelConfig C) (value : C) (hs : s.stack = []) :
  embed (realizedInstrument D_0 j_0 realize (pauliXTreeAt s value hs)
    (pauliXTreeAtRealization D_0 j_0 realize s value hs)) =
  embed (FiniteInstrumentComp.ofOperation Qubit.pauliXOp
    (realize value)) := by
  let ? := realizedInstrument D_0 j_0 realize (pauliXTreeAt s value hs)
  (pauliXTreeAtRealization D_0 j_0 realize s value hs)
  let _ : Unique ?.Outcome :=
  { default := <<>, <>>
    uniq := by intro o; rcases o with <<>, <>>; rfl }
  refine embed_eq_ofOperation_of_unique ? Qubit.pauliXOp (realize value) ?_ ?_
  * intro o
  change payloadLeafValue D_0 j_0 realize
    ((pauliXTreeAt s value hs).instrument.value o) = realize value
  rw [payloadLeafValue_payload D_0 j_0 realize _
    (pauliXTreeAt_leaf_payload s value hs o)]
  * intro o

```

```

rcases o with <<>, <>>
change KrausFamily.comp (KrausFamily.identity 2)
  (channelInternalOperation
    {s with control := .term (.prim (.pauliX value))}).kraus =
  Qubit.pauliXOp.kraus
simp [channelInternalOperation]

theorem embed_of_pauliX_tree_at {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} {value : C}
  (hc : s.control = .term (.prim (.pauliX value)))
  (hs : s.stack = [])
  (tree : ChannelTree C s)
  (R : ChannelTreeRealization D_0 j_0 realize tree)
  (selectors : List Bool) (i : Nat) :
  embed (restrictedInstrument D_0 j_0 realize tree R selectors i) =
    embed (FiniteInstrumentComp.ofOperation Qubit.pauliXOp

```

Lean 4 source (lines 2001–2400)

```

  (realize value)) := by
cases tree with
| terminal hterm =>
  have := hterm.control_eq.symm.trans hc
  cases this
| internal h next =>
  have ht := ChannelInternalStep.eq_of_pauliX h hc
  have hnextctrl := ht.1
  have hnextstack := ht.2.2.1.trans hs
  cases next with
| terminal hterm =>
  have hvalue : hterm.value = .payload value := by
    injection hterm.control_eq.symm.trans hnextctrl
  have hall : forall o, OutcomeCompatible
    (ChannelTree.internal h (ChannelTree.terminal hterm))
    selectors i o := by
    intro o
    simp [OutcomeCompatible, ChannelTree.instrument]
    exact List.nil_prefix
  rw [embed_restricted_of_all_compatible D_0 j_0 realize _ R
    selectors i hall]
  let ? := realizedInstrument D_0 j_0 realize
    (ChannelTree.internal h (ChannelTree.terminal hterm)) R
  let _ : Unique ? Outcome :=
    { default := <<>, <>>
      uniq := by intro o; rcases o with <<>, <>>; rfl }
  refine embed_eq_ofOperation_of_unique ? Qubit.pauliXOp
    (realize value) ?_ ?_
* intro o
  have hrel := R.related o
  have hpay :
    ((ChannelTree.internal h (ChannelTree.terminal hterm))
      .instrument.value o).isTerminal.value =
      .payload value := by
    simp [ChannelTree.instrument]
    exact hvalue
  rw [hpay] at hrel
  exact ValueRel.payload_eq D_0 j_0 hrel
* intro o
  rcases o with <<>, <>>
  change KrausFamily.comp (KrausFamily.identity 2)

```

```

        (channelInternalOperation s).kraus =
        Qubit.pauliXOp.kraus
    simp [channelInternalOperation, hc]
| internal h' _ =>
    exact False.elim
        (ChannelInternalStep.not_value_nil h' hnextctrl hnextstack)
| external _ h' _ =>
    exact False.elim (ChannelExternalStep.not_value h' hnextctrl)
| probability _ _ _ => cases hnextctrl
| probabilityZero _ => cases hnextctrl
| probabilityOne _ => cases hnextctrl
| measurement _ _ => cases hnextctrl
| external _ h _ =>
    exact False.elim (ChannelExternalStep.not_prim h hc)
| probability _ _ _ =>
    cases hc
| probabilityZero _ =>
    cases hc
| probabilityOne _ =>
    cases hc
| measurement _ _ =>
    cases hc

theorem pauliX_empty_presentedChannelTreeCompleteness {C : Type}
(D_0 : QDomain.{0})
(j_0 : IsContinuousLatticeProjection D_0.carrier
  (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
(realize : C -> HSemanticValue D_0 j_0)
(s : ChannelConfig C) (value : C)
(hs : s.stack = [])
(semanticEnv : Env (HSemanticValue D_0 j_0)) :
PresentedChannelTreeCompleteness D_0 j_0 realize
{ s with control := .term (.prim (.pauliX value)) }
(interp (hardwarePrimitive D_0 j_0 realize)
  (.prim (.pauliX value)) semanticEnv) where
selected_result_eq_channelTree_sup_presented := by
intro selectors i ? k hk
have hdenote :
  interp (hardwarePrimitive D_0 j_0 realize)
    (.prim (.pauliX value)) semanticEnv =
    taggedEmbed (FiniteInstrumentComp.ofOperation Qubit.pauliXOp
      (realize value)) := by
simp [hardwarePrimitive_pauliX]
rw [hdenote, selectPath_taggedEmbed, taggedEmbed_apply]
refine le_antisymm ?_ ?_
* apply le_sSup
refine <1, pauliXTreeAt s value hs,
  pauliXTreeAtRealization D_0 j_0 realize s value hs, ?_, ?_>
* simp [pauliXTreeAt_depth]
* rw [restrictedResult_eq_embed D_0 j_0 realize
  (pauliXTreeAt s value hs)
  (pauliXTreeAtRealization D_0 j_0 realize s value hs)
  selectors i k
  (by simp [ResultAvailable, resultAvailableAt, pauliXTreeAt]),
  embed_restricted_of_all_compatible D_0 j_0 realize
  (pauliXTreeAt s value hs)
  (pauliXTreeAtRealization D_0 j_0 realize s value hs)
  selectors i (pauliXTreeAt_compatible s value hs selectors i),
  pauliXTreeAt_realized_eq_ofOperation]
* apply sSup_le
rintro T <_, tree, R, _, rfl>
exact (restrictedResult_le_embed D_0 j_0 realize tree R selectors i k
  ).trans_eq

```



```

    (congrArg (fun f => f k)
      (embed_of_pauliX_tree_at D_0 j_0 realize
        (s := {s with control := .term (.prim (.pauliX value))})
        rfl hs tree R selectors i))

/-- Measure-Z at an empty stack, with definitional primitive control. -/
noncomputable def measurementTreeAt {C : Type} (s : ChannelConfig C)
  (zeroValue oneValue : C) (hs : s.stack = []) :
  ChannelTree C
  {s with control := .term (.prim (.measureZ zeroValue oneValue))} :=
  ChannelTree.measurement (s := s)
  (ChannelTree.terminal
    { value := .payload zeroValue, control_eq := rfl, stack_eq := hs })
  (ChannelTree.terminal
    { value := .payload oneValue, control_eq := rfl, stack_eq := hs })

theorem measurementTreeAt_depth {C : Type} (s : ChannelConfig C)
  (zeroValue oneValue : C) (hs : s.stack = []) :
  (measurementTreeAt s zeroValue oneValue hs).depth = 1 :=
  rfl

noncomputable def measurementTreeAtRealization {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (s : ChannelConfig C) (zeroValue oneValue : C) (hs : s.stack = []) :
  ChannelTreeRealization D_0 j_0 realize
  (measurementTreeAt s zeroValue oneValue hs) where
  value := payloadLeafValue D_0 j_0 realize
  related := by
    intro o
    obtain <b, hb> := o
    cases b <;> exact ValueRel.payload _

theorem measurementTreeAt_leaf_payload {C : Type} (s : ChannelConfig C)
  (zeroValue oneValue : C) (hs : s.stack = [])
  (o : (measurementTreeAt s zeroValue oneValue hs).instrument.Outcome) :
  ((measurementTreeAt s zeroValue oneValue hs).instrument.value o
    ).isTerminal.value =
    .payload (match o.1 with
      | true => oneValue
      | false => zeroValue) := by
    obtain <b, hb> := o
    cases b <;> (cases hb; rfl)

theorem measurementTreeAt_compatible {C : Type} (s : ChannelConfig C)
  (zeroValue oneValue : C) (hs : s.stack = [])
  (selectors : List Bool) (i : Nat)
  (o : (measurementTreeAt s zeroValue oneValue hs).instrument.Outcome) :
  OutcomeCompatible (measurementTreeAt s zeroValue oneValue hs)
  selectors i o := by
    obtain <b, hb> := o
    cases b
    * cases hb
      simp [OutcomeCompatible, ChannelTree.instrument]
      exact List.nil_prefix
    * cases hb
      simp [OutcomeCompatible, ChannelTree.instrument]
      exact List.nil_prefix

theorem measurementTreeAt_realized_eq_measureZ {C : Type}
  (D_0 : QDomain.{0})

```

```

(j_0 : IsContinuousLatticeProjection D_0.carrier
  (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
(realize : C -> HSemanticValue D_0 j_0)
(s : ChannelConfig C) (zeroValue oneValue : C) (hs : s.stack = []) :
embed (realizedInstrument D_0 j_0 realize
  (measurementTreeAt s zeroValue oneValue hs)
  (measurementTreeAtRealization D_0 j_0 realize s zeroValue oneValue hs)) =
  embed (Qubit.measureZComp.map
    (fun b => if b then realize oneValue else realize zeroValue)) := by
let ? := realizedInstrument D_0 j_0 realize
  (measurementTreeAt s zeroValue oneValue hs)
  (measurementTreeAtRealization D_0 j_0 realize s zeroValue oneValue hs)
let ? := Qubit.measureZComp.map
  (fun b => if b then realize oneValue else realize zeroValue)
refine embed_congr_of_outcome_equiv ? ? ?e ?hbranch ?hvalue
* exact
  { toFun := fun o => o.1
    invFun := fun b =>
      match b with
      | true => <true, <>>
      | false => <false, <>>
    left_inv := by
      intro o
      obtain <b, hb> := o
      cases b <;> (cases hb; rfl)
    right_inv := by
      intro b
      cases b <;> rfl }
* intro o
  obtain <b, hb> := o
  cases b
* cases hb
  change Qubit.measureZComp.branch false =
    KrausFamily.comp (KrausFamily.identity 2)
    (Qubit.measureZComp.branch false)
  simp
* cases hb
  change Qubit.measureZComp.branch true =
    KrausFamily.comp (KrausFamily.identity 2)
    (Qubit.measureZComp.branch true)
  simp
* intro o
  obtain <b, hb> := o
  cases b
* cases hb
  change realize zeroValue =
    payloadLeafValue D_0 j_0 realize
      ((measurementTreeAt s zeroValue oneValue hs).instrument.value
        <false, <>>)
  rw [payloadLeafValue_payload D_0 j_0 realize _
    (measurementTreeAt_leaf_payload s zeroValue oneValue hs
      <false, <>>)]
* cases hb
  change realize oneValue =
    payloadLeafValue D_0 j_0 realize
      ((measurementTreeAt s zeroValue oneValue hs).instrument.value
        <true, <>>)
  rw [payloadLeafValue_payload D_0 j_0 realize _
    (measurementTreeAt_leaf_payload s zeroValue oneValue hs
      <true, <>>)]

theorem embed_of_measureZ_tree_at {C : Type}
  (D_0 : QDomain.{0})

```

```

(j_0 : IsContinuousLatticeProjection D_0.carrier
  (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
(realize : C -> HSemanticValue D_0 j_0)
{s : ChannelConfig C} {zeroValue oneValue : C}
(hc : s.control = .term (.prim (.measureZ zeroValue oneValue)))
(hs : s.stack = [])
(tree : ChannelTree C s)
(R : ChannelTreeRealization D_0 j_0 realize tree)
(selectors : List Bool) (i : Nat) :
embed (restrictedInstrument D_0 j_0 realize tree R selectors i) =
  embed (Qubit.measureZComp.map
    (fun b => if b then realize oneValue else realize zeroValue)) := by
cases tree with
| terminal hterm =>
  have := hterm.control_eq.symm.trans hc
  cases this
| internal h next =>
  exact False.elim (ChannelInternalStep.not_measureZ h hc)
| external _ h _ =>
  exact False.elim (ChannelExternalStep.not_prim h hc)
| probability _ _ _ =>
  cases hc
| probabilityZero _ =>
  cases hc
| probabilityOne _ =>
  cases hc
| @measurement source z' o' zeroTree oneTree =>
  have hctrl0 :
    ({source with
      control := .value (.payload z')
      quantum := applyOperation (measurementOperation false)
      source.quantum}).control =
      .value (.payload z') := rfl
  have hstack0 :
    ({source with
      control := .value (.payload z')
      quantum := applyOperation (measurementOperation false)
      source.quantum}).stack = [] := hs
  have hctrl1 :
    ({source with
      control := .value (.payload o')
      quantum := applyOperation (measurementOperation true)
      source.quantum}).control =
      .value (.payload o') := rfl
  have hstack1 :
    ({source with
      control := .value (.payload o')
      quantum := applyOperation (measurementOperation true)
      source.quantum}).stack = [] := hs
  cases zeroTree with
  | terminal hz =>
    cases oneTree with
    | terminal ho =>
      have hval0 : hz.value = .payload z' :=
        (by injection hz.control_eq : _ = hz.value).symm
      have hval1 : ho.value = .payload o' :=
        (by injection ho.control_eq : _ = ho.value).symm
      have hzid : z' = zeroValue := by
        cases hc
        rfl
      have hoid : o' = oneValue := by
        cases hc
        rfl

```

```

have hall : forall o, OutcomeCompatible
  (ChannelTree.measurement
    (ChannelTree.terminal hz) (ChannelTree.terminal ho))
  selectors i o := by
intro o
obtain <b, hb> := o
cases b
* cases hb
  simp [OutcomeCompatible, ChannelTree.instrument]
  exact List.nil_prefix
* cases hb
  simp [OutcomeCompatible, ChannelTree.instrument]
  exact List.nil_prefix
rw [embed_restricted_of_all_compatible D_0 j_0 realize _ R
  selectors i hall]
let ? := realizedInstrument D_0 j_0 realize
  (ChannelTree.measurement
    (ChannelTree.terminal hz) (ChannelTree.terminal ho)) R
let ? := Qubit.measureZComp.map
  (fun b => if b then realize oneValue else realize zeroValue)
refine embed_congr_of_outcome_equiv ? ? ?e ?hbranch ?hvalue
* exact
  { toFun := fun o => o.1
    invFun := fun b =>
      match b with
      | true => <true, <>>
      | false => <false, <>>
    left_inv := by
      intro o
      obtain <b, hb> := o
      cases b <;> (cases hb; rfl)
    right_inv := by
      intro b
      cases b <;> rfl }
* intro o
obtain <b, hb> := o
cases b
* cases hb
  change Qubit.measureZComp.branch false =
    KrausFamily.comp (KrausFamily.identity 2)
    (Qubit.measureZComp.branch false)
  simp
* cases hb
  change Qubit.measureZComp.branch true =
    KrausFamily.comp (KrausFamily.identity 2)
    (Qubit.measureZComp.branch true)
  simp
* intro o
obtain <b, hb> := o
cases b
* cases hb
  have hrel := R.related <false, <>>
  have hpay :
    ((ChannelTree.measurement
      (ChannelTree.terminal hz)
      (ChannelTree.terminal ho)).instrument.value
      <false, <>>).isTerminal.value =
      .payload z' := by
    simp [ChannelTree.instrument]
    exact hval0
  rw [hpay] at hrel
  exact ((ValueRel.payload_eq D_0 j_0 hrel).trans
    (congrArg realize hzid)).symm

```

```

* cases hb
  have hrel := R.related <true, <>>
  have hpay :
    ((ChannelTree.measurement
      (ChannelTree.terminal hz)
      (ChannelTree.terminal ho)).instrument.value
      <true, <>>).isTerminal.value =
      .payload o' := by
    simp [ChannelTree.instrument]
    exact hval1
  rw [hpay] at hrel
  exact ((ValueRel.payload_eq D_0 j_0 hrel).trans
    (congrArg realize hoid)).symm
| internal h' _ =>
  exact False.elim
    (ChannelInternalStep.not_value_nil h' hctrl1 hstack1)
| external _ h' _ =>
  exact False.elim (ChannelExternalStep.not_value h' hctrl1)
| internal h' _ =>
  exact False.elim
    (ChannelInternalStep.not_value_nil h' hctrl0 hstack0)
| external _ h' _ =>
  exact False.elim (ChannelExternalStep.not_value h' hctrl0)

theorem measureZ_empty_presentedChannelTreeCompleteness {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (s : ChannelConfig C) (zeroValue oneValue : C)
  (hs : s.stack = [])
  (semanticEnv : Env (HSemanticValue D_0 j_0)) :
  PresentedChannelTreeCompleteness D_0 j_0 realize
  {s with control := .term (.prim (.measureZ zeroValue oneValue))}
  (interp (hardwarePrimitive D_0 j_0 realize)
    (.prim (.measureZ zeroValue oneValue)) semanticEnv) where
selected_result_eq_channelTree_sup_presented := by
  intro selectors i ? k hk
  have hdenote :
    interp (hardwarePrimitive D_0 j_0 realize)
      (.prim (.measureZ zeroValue oneValue)) semanticEnv =
    taggedEmbed (Qubit.measureZComp.map
      (fun b => if b then realize oneValue else realize zeroValue)) := by
    simp [hardwarePrimitive_measureZ]

```

Lean 4 source (lines 2401–2800)

```

rw [hdenote, selectPath_taggedEmbed, taggedEmbed_apply]
refine le_antisymm ?_ ?_
* apply le_sSup
  refine <1, measurementTreeAt s zeroValue oneValue hs,
    measurementTreeAtRealization D_0 j_0 realize s zeroValue oneValue hs,
    ?_, ?_>
* simp [measurementTreeAt_depth]
* rw [restrictedResult_eq_embed D_0 j_0 realize
  (measurementTreeAt s zeroValue oneValue hs)
  (measurementTreeAtRealization D_0 j_0 realize
    s zeroValue oneValue hs)
  selectors i k
  (by simp [ResultAvailable, resultAvailableAt, measurementTreeAt]),
  embed_restricted_of_all_compatible D_0 j_0 realize
  (measurementTreeAt s zeroValue oneValue hs)
  (measurementTreeAtRealization D_0 j_0 realize
    s zeroValue oneValue hs)

```

```

        selectors i
        (measurementTreeAt_compatible s zeroValue oneValue hs
         selectors i),
        measurementTreeAt_realized_eq_measureZ]
* apply sSup_le
rintro T <_, tree, R, _, rfl>
exact (restrictedResult_le_embed D_0 j_0 realize tree R selectors i k
      ).trans_eq
      (congrArg (fun f => f k)
       (embed_of_measureZ_tree_at D_0 j_0 realize
        (s :=
         {s with
          control := .term (.prim (.measureZ zeroValue oneValue))}))
       rfl hs tree R selectors i))

open Classical

/-- Application-free closed terms are presented-complete at every empty
stack, including the scaled quantum states of interior probability. -/
theorem empty_stack_choice_presentedChannelTreeCompleteness {C : Type}
(D_0 : QDomain.{0})
(j_0 : IsContinuousLatticeProjection D_0.carrier
 (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
(realize : C -> HSemanticValue D_0 j_0)
{s : ChannelConfig C} {code : Term (QubitPrimitive C)}
{semanticEnv : Env (HSemanticValue D_0 j_0)}
(hclosed : Closed code) (hnoapp : NoApp code)
(hc : s.control = .term code) (he : s.env = []) (hs : s.stack = [])
(henv : EnvRel D_0 j_0 realize s.env semanticEnv) :
PresentedChannelTreeCompleteness D_0 j_0 realize s
(interpret (hardwarePrimitive D_0 j_0 realize) code semanticEnv) := by
induction code generalizing s semanticEnv with
| var x =>
  exact False.elim
  ((closed_iff_forall_not_mem.mp hclosed x) (by simp [free]))
| app _ _ =>
  exact False.elim hnoapp
| lam x body _ih =>
  exact lam_terminal_presentedChannelTreeCompleteness D_0 j_0 realize
  hc hs (empty_env_closed_wellScoped hclosed hc he hs) henv
| recLam self arg body _ih =>
  exact recLam_terminal_presentedChannelTreeCompleteness D_0 j_0 realize
  hc hs (empty_env_closed_wellScoped hclosed hc he hs) henv
| intern left right ihL ihR =>
  have <hclL, hclR> := closed_intern hclosed
  have <hnaL, hnaR> := hnoapp
  have hL :=
    ihL hclL hnaL (s := {s with control := .term left})
    (semanticEnv := semanticEnv) rfl he hs henv
  have hR :=
    ihR hclR hnaR (s := {s with control := .term right})
    (semanticEnv := semanticEnv) rfl he hs henv
  exact PresentedChannelTreeCompleteness.congr
  (show {s with control := .term (.intern left right)} = s from
   ChannelConfig.ext hc.symm rfl rfl rfl)
  rfl
  (intern_empty_presentedChannelTreeCompleteness D_0 j_0 realize
   s left right semanticEnv hL hR)
| extern left right ihL ihR =>
  have <hclL, hclR> := closed_extern hclosed
  have <hnaL, hnaR> := hnoapp
  have hL :=
    ihL hclL hnaL (s := {s with control := .term left})

```

```

      (semanticEnv := semanticEnv) rfl he hs henv
have hR :=
  ihR hclR hnaR (s := {s with control := .term right})
  (semanticEnv := semanticEnv) rfl he hs henv
exact PresentedChannelTreeCompleteness.congr
  (show {s with control := .term (.extern left right)} = s from
    ChannelConfig.ext hc.symm rfl rfl rfl)
rfl
  (extern_empty_presentedChannelTreeCompleteness D_0 j_0 realize
    s left right semanticEnv hL hR)
| prob p left right ihL ihR =>
  have <hclL, hclR> := closed_prob hclosed
  have <hnaL, hnaR> := hnoapp
  if hI : 0 <= p /\ p <= 1 then
    if hp0 : p = 0 then
      subst p
      have hR :=
        ihR hclR hnaR (s := {s with control := .term right})
        (semanticEnv := semanticEnv) rfl he hs henv
      exact PresentedChannelTreeCompleteness.congr
        (show {s with control := .term (.prob 0 left right)} = s from
          ChannelConfig.ext hc.symm rfl rfl rfl)
      rfl
      (prob_zero_empty_presentedChannelTreeCompleteness D_0 j_0 realize
        s left right semanticEnv hR)
    else if hp1 : p = 1 then
      subst p
      have hL :=
        ihL hclL hnaL (s := {s with control := .term left})
        (semanticEnv := semanticEnv) rfl he hs henv
      exact PresentedChannelTreeCompleteness.congr
        (show {s with control := .term (.prob 1 left right)} = s from
          ChannelConfig.ext hc.symm rfl rfl rfl)
      rfl
      (prob_one_empty_presentedChannelTreeCompleteness D_0 j_0 realize
        s left right semanticEnv hL)
    else
      have hp0ne : p != 0 := hp0
      have hp1ne : p != 1 := hp1
      have hp_0 : 0 < p := lt_of_le_of_ne hI.1 hp0ne.symm
      have hp_1 : p < 1 := lt_of_le_of_ne hI.2 hp1ne
      have hL :=
        ihL hclL hnaL
        (s :=
          { s with
            control := .term left
            quantum := applyOperation
              (sourceProbabilityOperation p hp_0.le hp_1.le)
              s.quantum })
        (semanticEnv := semanticEnv) rfl he hs henv
      have hR :=
        ihR hclR hnaR
        (s :=
          { s with
            control := .term right
            quantum := applyOperation
              (sourceProbabilityOperation (1 - p)
                (sub_nonneg.mpr hp_1.le) (by linarith))
              s.quantum })
        (semanticEnv := semanticEnv) rfl he hs henv
      exact PresentedChannelTreeCompleteness.congr
        (show {s with control := .term (.prob p left right)} = s from
          ChannelConfig.ext hc.symm rfl rfl rfl)

```

```

      rfl
      (prob_empty_presented_of_presented_children D_0 j_0 realize
       s p hp_0 hp_1 left right semanticEnv hL hR)
    else
      exact PresentedChannelTreeCompleteness.congr
      (show {s with control := .term (.prob p left right)} = s from
       ChannelConfig.ext hc.symm rfl rfl rfl)
      rfl
      (prob_invalid_empty_presentedChannelTreeCompleteness D_0 j_0 realize
       s p hI left right semanticEnv)
  | prim p =>
    cases p with
    | ret value =>
      exact return_empty_presentedChannelTreeCompleteness D_0 j_0 realize
      hc hs (empty_env_closed_wellScoped hclosed hc he hs) henv
    | pauliX value =>
      exact PresentedChannelTreeCompleteness.congr
      (show {s with control := .term (.prim (.pauliX value))} = s from
       ChannelConfig.ext hc.symm rfl rfl rfl)
      rfl
      (pauliX_empty_presentedChannelTreeCompleteness D_0 j_0 realize
       s value hs semanticEnv)
  | measureZ zeroValue oneValue =>
    exact PresentedChannelTreeCompleteness.congr
    (show
     {s with
      control :=
        .term (.prim (.measureZ zeroValue oneValue))} = s from
     ChannelConfig.ext hc.symm rfl rfl rfl)
    rfl
    (measureZ_empty_presentedChannelTreeCompleteness D_0 j_0 realize
     s zeroValue oneValue hs semanticEnv)

/-- Presented completeness for every syntactically closed application-free
term at a normalized start: ordinary and recursive lambdas, internal and
external choice, probabilistic choice, and hardware primitives. -/
theorem closed_lambda_choice_presented_channelTreeCompleteness {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
   (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (code : Term (QubitPrimitive C))
  (hclosed : Closed code) (hnoapp : NoApp code)
  (quantum : NormalizedDensity 2)
  (semanticEnv : Env (HSemanticValue D_0 j_0)) :
  PresentedChannelTreeCompleteness D_0 j_0 realize
  (initialChannelConfig code quantum)
  (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv) :=
empty_stack_choice_presentedChannelTreeCompleteness D_0 j_0 realize
hclosed hnoapp rfl rfl rfl (env_nil D_0 j_0 realize semanticEnv)

/-- Token adequacy for the closed lambda-and-choice fragment. -/
theorem closed_lambda_choice_presented_token_adequacy {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
   (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (code : Term (QubitPrimitive C))
  (hclosed : Closed code) (hnoapp : NoApp code)
  (quantum : NormalizedDensity 2)
  (semanticEnv : Env (HSemanticValue D_0 j_0))
  (selectors : List Bool)
  (? : HSemanticValue D_0 j_0 -> FiniteInstrumentComp 2 PUnit.{1})

```



```

(k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2))
(hk : forall d, k d = (? d).satisfiedTTTheory resultCode)
(i : Nat) (token : TTObservationToken 2) :
token in HardwareAdequacy.selectPath selectors
  (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv) i k <->
  exists fuel, exists (tree : ChannelTree C
    (initialChannelConfig code quantum))
    (R : ChannelTreeRealization D_0 j_0 realize tree),
    tree.depth <= fuel /\
    ResultAvailable tree selectors i /\
    TTObservationToken.Holds resultCode token
    ((restrictedInstrument D_0 j_0 realize tree R selectors i).bind
     ?) :=
presented_channel_tree_token_adequacy_iff D_0 j_0 realize
  (initialChannelConfig code quantum)
  (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv)
  (closed_lambda_choice_presented_channelTreeCompleteness D_0 j_0 realize
   code hclosed hnoapp quantum semanticEnv)
  selectors ? k hk i token

open Classical

/-- Application-free terms that are well-scoped in the current environment
are presented-complete at every empty stack. After beta the body is
typically not closed, so this is the empty-stack lemma used by stacked
application. -/
theorem empty_stack_noapp_presentedChannelTreeCompleteness {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEstablishedContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} {code : Term (QubitPrimitive C)}
  {semanticEnv : Env (HSemanticValue D_0 j_0)}
  (hnoapp : NoApp code)
  (hc : s.control = .term code) (hs : s.stack = [])
  (hscoped : ChannelConfig.WellScoped s)
  (henv : EnvRel D_0 j_0 realize s.env semanticEnv) :
PresentedChannelTreeCompleteness D_0 j_0 realize s
  (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv) := by
induction code generalizing s semanticEnv with
| var x =>
  have hctl := hscoped.left
  rw [hc] at hctl
  obtain <v, hlookup> := hctl.right x (by simp [free])
  have hrel :
    ChannelConfigRel D_0 j_0 realize
      {s with control := .term (.var x)}
      (interp (hardwarePrimitive D_0 j_0 realize) (.var x)
       semanticEnv) :=
    <interp (hardwarePrimitive D_0 j_0 realize) (.var x) semanticEnv,
    id, ControlRel.term _ s.env semanticEnv henv,
    (by rw [hs]; exact StackRel.nil), rfl>
  have hrelv :=
    channel_config_variable D_0 j_0 hlookup hrel
  have hscopedv : ChannelConfig.WellScoped
    {s with control := .value v} :=
    <<hctl.left, hctl.left x v hlookup>, hscoped.right>
  have hchild :
    PresentedChannelConfigCompleteness D_0 j_0 realize
      {s with control := .value v}
      (interp (hardwarePrimitive D_0 j_0 realize) (.var x)
       semanticEnv) :=
  { related := hrelv

```

```

    complete :=
      terminal_presentedChannelTreeCompleteness D_0 j_0 realize
        (s := {s with control := .value v})
        <v, rfl, hs> hscopedv hrelv }
  exact PresentedChannelTreeCompleteness.congr
    (show {s with control := .term (.var x)} = s from
      ChannelConfig.ext hc.symm rfl rfl rfl)
  rfl
  (variable_presentedChannelConfigCompleteness D_0 j_0 realize
    (s := {s with control := .term (.var x)}) rfl hlookup hrel
    hchild).complete
| app _ _ =>
  exact False.elim hnoapp
| lam x body _ih =>
  exact lam_terminal_presentedChannelTreeCompleteness D_0 j_0 realize
    hc hs hscoped henv
| recLam self arg body _ih =>
  exact recLam_terminal_presentedChannelTreeCompleteness D_0 j_0 realize
    hc hs hscoped henv
| intern left right ihL ihR =>
  have <hnaL, hnaR> := hnoapp
  have hctl := hscoped.left
  rw [hc] at hctl
  have hscopedL : ChannelConfig.WellScoped
    {s with control := .term left} :=
    <<hctl.left, fun x hx => hctl.right x (by simp [free, hx])>,
    hscoped.right>
  have hscopedR : ChannelConfig.WellScoped
    {s with control := .term right} :=
    <<hctl.left, fun x hx => hctl.right x (by simp [free, hx])>,
    hscoped.right>
  have hL :=
    ihL hnaL (s := {s with control := .term left})
    (semanticEnv := semanticEnv) rfl hs hscopedL henv
  have hR :=
    ihR hnaR (s := {s with control := .term right})
    (semanticEnv := semanticEnv) rfl hs hscopedR henv
  exact PresentedChannelTreeCompleteness.congr
    (show {s with control := .term (.intern left right)} = s from
      ChannelConfig.ext hc.symm rfl rfl rfl)
  rfl
  (intern_empty_presentedChannelTreeCompleteness D_0 j_0 realize
    s left right semanticEnv hL hR)
| extern left right ihL ihR =>
  have <hnaL, hnaR> := hnoapp
  have hctl := hscoped.left
  rw [hc] at hctl
  have hscopedL : ChannelConfig.WellScoped
    {s with control := .term left} :=
    <<hctl.left, fun x hx => hctl.right x (by simp [free, hx])>,
    hscoped.right>
  have hscopedR : ChannelConfig.WellScoped
    {s with control := .term right} :=
    <<hctl.left, fun x hx => hctl.right x (by simp [free, hx])>,
    hscoped.right>
  have hL :=
    ihL hnaL (s := {s with control := .term left})
    (semanticEnv := semanticEnv) rfl hs hscopedL henv
  have hR :=
    ihR hnaR (s := {s with control := .term right})
    (semanticEnv := semanticEnv) rfl hs hscopedR henv
  exact PresentedChannelTreeCompleteness.congr
    (show {s with control := .term (.extern left right)} = s from

```

```

    ChannelConfig.ext hc.symm rfl rfl rfl)
  rfl
  (extern_empty_presentedChannelTreeCompleteness D_0 j_0 realize
    s left right semanticEnv hL hR)
| prob p left right ihL ihR =>
  have <hnaL, hnaR> := hnoapp
  have hctl := hscoped.left
  rw [hc] at hctl
  have hscopedL : ChannelConfig.WellScoped
    {s with control := .term left} :=
    <<hctl.left, fun x hx => hctl.right x (by simp [free, hx])>,
    hscoped.right>
  have hscopedR : ChannelConfig.WellScoped
    {s with control := .term right} :=
    <<hctl.left, fun x hx => hctl.right x (by simp [free, hx])>,
    hscoped.right>
  if hI : 0 <= p /\ p <= 1 then
    if hp0 : p = 0 then
      subst p
      have hR :=
        ihR hnaR (s := {s with control := .term right})
        (semanticEnv := semanticEnv) rfl hs hscopedR henv
      exact PresentedChannelTreeCompleteness.congr
        (show {s with control := .term (.prob 0 left right)} = s from
          ChannelConfig.ext hc.symm rfl rfl rfl)
      rfl
      (prob_zero_empty_presentedChannelTreeCompleteness D_0 j_0 realize
        s left right semanticEnv hR)
    else if hp1 : p = 1 then
      subst p
      have hL :=
        ihL hnaL (s := {s with control := .term left})
        (semanticEnv := semanticEnv) rfl hs hscopedL henv
      exact PresentedChannelTreeCompleteness.congr
        (show {s with control := .term (.prob 1 left right)} = s from
          ChannelConfig.ext hc.symm rfl rfl rfl)
      rfl
      (prob_one_empty_presentedChannelTreeCompleteness D_0 j_0 realize
        s left right semanticEnv hL)
    else
      have hp0ne : p != 0 := hp0
      have hp1ne : p != 1 := hp1
      have hp_0 : 0 < p := lt_of_le_of_ne hI.1 hp0ne.symm
      have hp_1 : p < 1 := lt_of_le_of_ne hI.2 hp1ne
      have hL :=
        ihL hnaL
        (s :=
          { s with
            control := .term left
            quantum := applyOperation
              (sourceProbabilityOperation p hp_0.le hp_1.le)
              s.quantum })
        (semanticEnv := semanticEnv) rfl hs hscopedL henv
      have hR :=
        ihR hnaR
        (s :=
          { s with
            control := .term right
            quantum := applyOperation
              (sourceProbabilityOperation (1 - p)
                (sub_nonneg.mpr hp_1.le) (by linarith))
              s.quantum })
        (semanticEnv := semanticEnv) rfl hs hscopedR henv

```

```

exact PresentedChannelTreeCompleteness.congr
  (show {s with control := .term (.prob p left right)}) = s from
    ChannelConfig.ext hc.symm rfl rfl rfl)
rfl
(prob_empty_presented_of_presented_children D_0 j_0 realize

```

Lean 4 source (lines 2801–3200)

```

      s p hp_0 hp_1 left right semanticEnv hL hR)
else
  exact PresentedChannelTreeCompleteness.congr
    (show {s with control := .term (.prob p left right)}) = s from
      ChannelConfig.ext hc.symm rfl rfl rfl)
  rfl
  (prob_invalid_empty_presentedChannelTreeCompleteness D_0 j_0 realize
    s p hI left right semanticEnv)
| prim p =>
  cases p with
  | ret value =>
    exact return_empty_presentedChannelTreeCompleteness D_0 j_0 realize
      hc hs hscoped henv
  | pauliX value =>
    exact PresentedChannelTreeCompleteness.congr
      (show {s with control := .term (.prim (.pauliX value))}) = s from
        ChannelConfig.ext hc.symm rfl rfl rfl)
    rfl
    (pauliX_empty_presentedChannelTreeCompleteness D_0 j_0 realize
      s value hs semanticEnv)
| measureZ zeroValue oneValue =>
  exact PresentedChannelTreeCompleteness.congr
    (show
      {s with
        control :=
          .term (.prim (.measureZ zeroValue oneValue))}) = s from
        ChannelConfig.ext hc.symm rfl rfl rfl)
    rfl
    (measureZ_empty_presentedChannelTreeCompleteness D_0 j_0 realize
      s zeroValue oneValue hs semanticEnv)

open Classical

def runtimeValueBodySize {C : Type} : RuntimeValue C -> Nat
| .payload _ => 0
| .closure _ body _ => termSize body
| .recClosure _ _ body _ => termSize body

noncomputable def valueProducedSize {C : Type} (value : RuntimeValue C)
  (runtimeEnv : RuntimeEnv C) : Nat :=
  if exists x, RuntimeEnv.lookup x runtimeEnv = some value then
    0
  else
    runtimeValueBodySize value

noncomputable def envCharge {C : Type} : RuntimeEnv C -> Nat
| [] => 0
| (_, value) :: rest => valueProducedSize value runtimeEnv rest + envCharge rest

noncomputable def stackCharge {C : Type} (runtimeEnv : RuntimeEnv C) :
  EvalStack C -> Nat
| [] => 0
| .argument arg _ :: rest =>
  termSize arg + stackCharge runtimeEnv rest
| .function fn :: rest =>
  valueProducedSize fn runtimeEnv + stackCharge runtimeEnv rest

```

```

noncomputable def controlCharge {C : Type} (s : ChannelConfig C) : Nat :=
  match s.control with
  | .term code => termSize code
  | .value value => valueProducedSize value s.env

def controlPhase {C : Type} (s : ChannelConfig C) : Nat :=
  match s.control with
  | .term _ => 0
  | .value _ => 1

/-- Environment charge is retained for later stacked-beta accounting, but the
active well-founded measure does not include it: binding a recursive
closure would otherwise double-count the body against the opened control. -/
noncomputable def configMeasure {C : Type} (s : ChannelConfig C) : Nat :=
  2 * (controlCharge s + stackCharge s.env s.stack) + controlPhase s

@[simp] theorem runtimeValueBodySize_payload {C : Type} (value : C) :
  runtimeValueBodySize (RuntimeValue.payload value) = 0 :=
  rfl

@[simp] theorem runtimeValueBodySize_closure {C : Type}
  (x : Name) (body : Term (QubitPrimitive C)) (runtimeEnv : RuntimeEnv C) :
  runtimeValueBodySize (RuntimeValue.closure x body runtimeEnv) =
    termSize body :=
  rfl

@[simp] theorem runtimeValueBodySize_recClosure {C : Type}
  (self arg : Name) (body : Term (QubitPrimitive C))
  (runtimeEnv : RuntimeEnv C) :
  runtimeValueBodySize
    (RuntimeValue.recClosure self arg body runtimeEnv) =
    termSize body :=
  rfl

theorem valueProducedSize_of_mem {C : Type} {value : RuntimeValue C}
  {runtimeEnv : RuntimeEnv C}
  (h : exists x, RuntimeEnv.lookup x runtimeEnv = some value) :
  valueProducedSize value runtimeEnv = 0 := by
  simp [valueProducedSize, h]

theorem valueProducedSize_of_lookup {C : Type}
  {value : RuntimeValue C} {runtimeEnv : RuntimeEnv C} {x : Name}
  (h : RuntimeEnv.lookup x runtimeEnv = some value) :
  valueProducedSize value runtimeEnv = 0 :=
  valueProducedSize_of_mem <x, h>

theorem valueProducedSize_le_body {C : Type} (value : RuntimeValue C)
  (runtimeEnv : RuntimeEnv C) :
  valueProducedSize value runtimeEnv <= runtimeValueBodySize value := by
  unfold valueProducedSize
  split_ifs <;> omega

theorem valueProducedSize_of_fresh {C : Type} {value : RuntimeValue C}
  {runtimeEnv : RuntimeEnv C}
  (h : forall y, RuntimeEnv.lookup y runtimeEnv != some value) :
  valueProducedSize value runtimeEnv = runtimeValueBodySize value := by
  simp [valueProducedSize]
  intro x hx
  exact (h x hx).elim

theorem envCharge_bind {C : Type} (x : Name) (value : RuntimeValue C)
  (runtimeEnv : RuntimeEnv C) :

```

```

envCharge (RuntimeEnv.bind x value runtimeEnv) =
  valueProducedSize value runtimeEnv + envCharge runtimeEnv :=
rfl

theorem stackCharge_argument {C : Type} (runtimeEnv : RuntimeEnv C)
  (arg : Term (QubitPrimitive C)) (callEnv : RuntimeEnv C)
  (rest : EvalStack C) :
  stackCharge runtimeEnv (.argument arg callEnv :: rest) =
    termSize arg + stackCharge runtimeEnv rest :=
rfl

theorem stackCharge_function {C : Type} (runtimeEnv : RuntimeEnv C)
  (fn : RuntimeValue C) (rest : EvalStack C) :
  stackCharge runtimeEnv (.function fn :: rest) =
    valueProducedSize fn runtimeEnv + stackCharge runtimeEnv rest :=
rfl

theorem configMeasure_application {C : Type} {s : ChannelConfig C}
  {fn arg : Term (QubitPrimitive C)}
  (hc : s.control = .term (.app fn arg)) :
  configMeasure
    {s with
      control := .term fn
      stack := .argument arg s.env :: s.stack} <
    configMeasure s := by
  unfold configMeasure controlCharge controlPhase
  rw [hc]
  simp [termSize, stackCharge_argument]
  omega

theorem configMeasure_lambda {C : Type} {s : ChannelConfig C}
  {x : Name} {body : Term (QubitPrimitive C)}
  (hc : s.control = .term (.lam x body)) :
  configMeasure {s with control := .value (.closure x body s.env)} <
    configMeasure s := by
  unfold configMeasure controlCharge controlPhase
  rw [hc]
  simp [termSize]
  have hle :
    valueProducedSize (RuntimeValue.closure x body s.env) s.env <=
      termSize body :=
    valueProducedSize_le_body _ _
  omega

theorem configMeasure_recLam {C : Type} {s : ChannelConfig C}
  {self arg : Name} {body : Term (QubitPrimitive C)}
  (hc : s.control = .term (.recLam self arg body)) :
  configMeasure
    {s with control := .value (.recClosure self arg body s.env)} <
    configMeasure s := by
  unfold configMeasure controlCharge controlPhase
  rw [hc]
  simp [termSize]
  have hle :
    valueProducedSize
      (RuntimeValue.recClosure self arg body s.env) s.env <=
      termSize body :=
    valueProducedSize_le_body _ _
  omega

theorem configMeasure_variable {C : Type} {s : ChannelConfig C}
  {x : Name} {v : RuntimeValue C}
  (hc : s.control = .term (.var x))

```

```

(hlookup : RuntimeEnv.lookup x s.env = some v) :
  configMeasure {s with control := .value v} < configMeasure s := by
simp [configMeasure, controlCharge, controlPhase, hc,
  valueProducedSize_of_lookup hlookup, termSize]
omega

theorem configMeasure_intern_left {C : Type} {s : ChannelConfig C}
  {left right : Term (QubitPrimitive C)}
  (hc : s.control = .term (.intern left right)) :
  configMeasure {s with control := .term left} < configMeasure s := by
simp [configMeasure, controlCharge, controlPhase, hc, termSize]

theorem configMeasure_intern_right {C : Type} {s : ChannelConfig C}
  {left right : Term (QubitPrimitive C)}
  (hc : s.control = .term (.intern left right)) :
  configMeasure {s with control := .term right} < configMeasure s := by
simp [configMeasure, controlCharge, controlPhase, hc, termSize]

theorem configMeasure_extern_left {C : Type} {s : ChannelConfig C}
  {left right : Term (QubitPrimitive C)}
  (hc : s.control = .term (.extern left right)) :
  configMeasure {s with control := .term left} < configMeasure s := by
simp [configMeasure, controlCharge, controlPhase, hc, termSize]

theorem configMeasure_extern_right {C : Type} {s : ChannelConfig C}
  {left right : Term (QubitPrimitive C)}
  (hc : s.control = .term (.extern left right)) :
  configMeasure {s with control := .term right} < configMeasure s := by
simp [configMeasure, controlCharge, controlPhase, hc, termSize]

theorem configMeasure_prob_left {C : Type} {s : ChannelConfig C}
  {p : ?} {left right : Term (QubitPrimitive C)}
  (hc : s.control = .term (.prob p left right)) :
  configMeasure {s with control := .term left} < configMeasure s := by
simp [configMeasure, controlCharge, controlPhase, hc, termSize]

theorem configMeasure_prob_right {C : Type} {s : ChannelConfig C}
  {p : ?} {left right : Term (QubitPrimitive C)}
  (hc : s.control = .term (.prob p left right)) :
  configMeasure {s with control := .term right} < configMeasure s := by
simp [configMeasure, controlCharge, controlPhase, hc, termSize]

theorem configMeasure_congr_quantum {C : Type} {s : ChannelConfig C}
  (quantum : SubNormalizedDensity 2) :
  configMeasure {s with quantum := quantum} = configMeasure s :=
rfl

theorem configMeasure_return {C : Type} {s : ChannelConfig C} {value : C}
  (hc : s.control = .term (.prim (.ret value))) :
  configMeasure {s with control := .value (.payload value)} <
  configMeasure s := by
  unfold configMeasure controlCharge controlPhase valueProducedSize
  runtimeValueBodySize
  rw [hc]
  simp [termSize]
  omega

theorem configMeasure_pauliX {C : Type} {s : ChannelConfig C} {value : C}
  (hc : s.control = .term (.prim (.pauliX value))) :
  configMeasure
    {s with
      control := .value (.payload value)
      quantum := applyOperation Qubit.pauliXOp s.quantum} <

```

```

    configMeasure s := by
  unfold configMeasure controlCharge controlPhase valueProducedSize
  runtimeValueBodySize
  rw [hc]
  simp [termSize]
  omega

theorem configMeasure_measureZ_zero {C : Type} {s : ChannelConfig C}
  {zeroValue oneValue : C}
  (hc : s.control = .term (.prim (.measureZ zeroValue oneValue))) :
  configMeasure
    {s with
      control := .value (.payload zeroValue)
      quantum := applyOperation (measurementOperation false) s.quantum} <
    configMeasure s := by
  unfold configMeasure controlCharge controlPhase valueProducedSize
  runtimeValueBodySize
  rw [hc]
  simp [termSize]
  omega

theorem configMeasure_measureZ_one {C : Type} {s : ChannelConfig C}
  {zeroValue oneValue : C}
  (hc : s.control = .term (.prim (.measureZ zeroValue oneValue))) :
  configMeasure
    {s with
      control := .value (.payload oneValue)
      quantum := applyOperation (measurementOperation true) s.quantum} <
    configMeasure s := by
  unfold configMeasure controlCharge controlPhase valueProducedSize
  runtimeValueBodySize
  rw [hc]
  simp [termSize]
  omega

theorem configMeasure_evaluateArgument {C : Type} {s : ChannelConfig C}
  {fn : RuntimeValue C} {arg : Term (QubitPrimitive C)}
  {callEnv : RuntimeEnv C} {rest : EvalStack C}
  (hc : s.control = .value fn)
  (hs : s.stack = .argument arg callEnv :: rest)
  (henv : s.env = callEnv) :
  configMeasure
    {s with
      control := .term arg
      env := callEnv
      stack := .function fn :: rest} <
    configMeasure s := by
  unfold configMeasure controlCharge controlPhase
  rw [hc, hs, henv]
  simp [stackCharge_argument, stackCharge_function]
  omega

theorem configMeasure_beta {C : Type} {s : ChannelConfig C} {x : Name}
  {body : Term (QubitPrimitive C)} {closureEnv : RuntimeEnv C}
  {arg : RuntimeValue C} {rest : EvalStack C}
  (hc : s.control = .value arg)
  (hs : s.stack = .function (.closure x body closureEnv) :: rest)
  (hfresh :
    forall y, RuntimeEnv.lookup y s.env !=
      some (.closure x body closureEnv))
  (hrest :
    stackCharge (RuntimeEnv.bind x arg closureEnv) rest <=
      stackCharge s.env rest) :

```



```

configMeasure
  {s with
    control := .term body
    env := RuntimeEnv.bind x arg closureEnv
    stack := rest} <
  configMeasure s := by
have hfn :
  valueProducedSize (RuntimeValue.closure x body closureEnv) s.env =
    termSize body := by
  simpa [runtimeValueBodySize] using
    valueProducedSize_of_fresh hfresh
simp [configMeasure, controlCharge, controlPhase, hc, hs, hfn,
  termSize, stackCharge_function]
omega

theorem configMeasure_beta_nil {C : Type} {s : ChannelConfig C} {x : Name}
  {body : Term (QubitPrimitive C)} {closureEnv : RuntimeEnv C}
  {arg : RuntimeValue C}
  (hc : s.control = .value arg)
  (hs : s.stack = [.function (.closure x body closureEnv)])
  (hfresh :
    forall y, RuntimeEnv.lookup y s.env !=
      some (.closure x body closureEnv)) :
  configMeasure
    {s with
      control := .term body
      env := RuntimeEnv.bind x arg closureEnv
      stack := []} <
    configMeasure s :=
  configMeasure_beta hc hs hfresh (by simp [stackCharge])

theorem configMeasure_recBeta {C : Type} {s : ChannelConfig C}
  {self x : Name} {body : Term (QubitPrimitive C)}
  {closureEnv : RuntimeEnv C} {arg : RuntimeValue C}
  {rest : EvalStack C}
  (hc : s.control = .value arg)
  (hs : s.stack =
    .function (.recClosure self x body closureEnv) :: rest)
  (hfresh :
    forall y, RuntimeEnv.lookup y s.env !=
      some (.recClosure self x body closureEnv))
  (hrest :
    stackCharge
      (RuntimeEnv.bind x arg
        (RuntimeEnv.bind self
          (.recClosure self x body closureEnv) closureEnv))
      rest <=
      stackCharge s.env rest) :
  configMeasure
    {s with
      control := .term body
      env :=
        RuntimeEnv.bind x arg
          (RuntimeEnv.bind self
            (.recClosure self x body closureEnv) closureEnv)
      stack := rest} <
    configMeasure s := by
have hfn :
  valueProducedSize
    (RuntimeValue.recClosure self x body closureEnv) s.env =
    termSize body := by
  simpa [runtimeValueBodySize] using
    valueProducedSize_of_fresh hfresh

```

```

simp [configMeasure, controlCharge, controlPhase, hc, hs, hfn,
termSize, stackCharge_function]
omega

theorem configMeasure_recBeta_nil {C : Type} {s : ChannelConfig C}
  {self x : Name} {body : Term (QubitPrimitive C)}
  {closureEnv : RuntimeEnv C} {arg : RuntimeValue C}
  (hc : s.control = .value arg)
  (hs : s.stack = [.function (.recClosure self x body closureEnv)])
  (hfresh :
    forall y, RuntimeEnv.lookup y s.env !=
      some (.recClosure self x body closureEnv)) :
  configMeasure
    {s with
      control := .term body
      env :=
        RuntimeEnv.bind x arg
        (RuntimeEnv.bind self
          (.recClosure self x body closureEnv) closureEnv)
      stack := []} <
    configMeasure s :=
  configMeasure_recBeta hc hs hfresh (by simp [stackCharge])

theorem stackCharge_eq_of_no_function {C : Type}
  (env_1 env_2 : RuntimeEnv C) :
  forall rest : EvalStack C,
    (forall fn, Frame.function fn notin rest) ->
    stackCharge env_1 rest = stackCharge env_2 rest
| [], _ => rfl

Lean 4 source (lines 3201–3600)

| .argument arg callEnv :: rest, h => by
  simp [stackCharge]
  exact stackCharge_eq_of_no_function env_1 env_2 rest
    (fun fn hmem => h fn (by simp [hmem]))
| .function fn :: _, h =>
  (h fn (by simp)).elim

theorem channelConfigRel_term_inv {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  {realize : C -> HSemanticValue D_0 j_0}
  {s : ChannelConfig C} {code : Term (QubitPrimitive C)}
  {answer : HSemanticComp D_0 j_0}
  (hc : s.control = .term code)
  (hrel : ChannelConfigRel D_0 j_0 realize s answer) :
  exists semanticEnv k,
    EnvRel D_0 j_0 realize s.env semanticEnv /\
    StackRel D_0 j_0 realize s.stack k /\
    answer =
      k (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv) := by
  rcases hrel with <current, k, hcontrol, hstack, rfl>
  rw [hc] at hcontrol
  cases hcontrol with
| term _ _ semanticEnv henv =>
  exact <semanticEnv, k, henv, hstack, rfl>

theorem wellScoped_term_child {C : Type}
  {s : ChannelConfig C} {code child : Term (QubitPrimitive C)}
  (hc : s.control = .term code)
  (hscoped : ChannelConfig.WellScoped s)
  (hcover : forall x, x in free child -> x in free code) :

```

```

    ChannelConfig.WellScoped {s with control := .term child} := by
have <hctl, hstk> := hscoped
rw [hc] at hctl
exact <<hctl.left, fun x hx => hctl.right x (hcover x hx)>, hstk>

/-- Internal choice at a related well-scoped state is presented-complete
once both children are, using the stack continuation that preserves intern. -/
theorem intern_related_presentedChannelConfigCompleteness {C : Type}
(D_0 : QDomain.{0})
(j_0 : IsContinuousLatticeProjection D_0.carrier
(QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
(realize : C -> HSemanticValue D_0 j_0)
{s : ChannelConfig C} {left right : Term (QubitPrimitive C)}
{answer : HSemanticComp D_0 j_0}
(hc : s.control = .term (.intern left right))
(hrel : ChannelConfigRel D_0 j_0 realize s answer)
(hleft :
forall semanticEnv k,
EnvRel D_0 j_0 realize s.env semanticEnv ->
StackRel D_0 j_0 realize s.stack k ->
PresentedChannelConfigCompleteness D_0 j_0 realize
{s with control := .term left}
(k (interp (hardwarePrimitive D_0 j_0 realize) left
semanticEnv)))
(hright :
forall semanticEnv k,
EnvRel D_0 j_0 realize s.env semanticEnv ->
StackRel D_0 j_0 realize s.stack k ->
PresentedChannelConfigCompleteness D_0 j_0 realize
{s with control := .term right}
(k (interp (hardwarePrimitive D_0 j_0 realize) right
semanticEnv))) :
PresentedChannelConfigCompleteness D_0 j_0 realize s answer := by
obtain <semanticEnv, k, henv, hstack, rfl> :=
channelConfigRel_term_inv D_0 j_0 hc hrel
refine
{ related := hrel
complete :=
PresentedChannelTreeCompleteness.congr
(show {s with control := .term (.intern left right)} = s from
ChannelConfig.ext hc.symm rfl rfl rfl)
rfl
(intern_stacked_presentedChannelTreeCompleteness
D_0 j_0 realize s left right semanticEnv k
(HardwareLogicalRelation.stackRel_map_intern
(D_0 := D_0) (j_0 := j_0) hstack)
(hleft semanticEnv k henv hstack).complete
(hright semanticEnv k henv hstack).complete) }

/-- Probability at a related well-scoped state is presented-complete
once both children are, at every residual quantum. The stack
continuation preserves probabilistic choice. -/
theorem prob_related_presentedChannelConfigCompleteness {C : Type}
(D_0 : QDomain.{0})
(j_0 : IsContinuousLatticeProjection D_0.carrier
(QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
(realize : C -> HSemanticValue D_0 j_0)
{s : ChannelConfig C} {p : ?}
{left right : Term (QubitPrimitive C)}
{answer : HSemanticComp D_0 j_0}
(hc : s.control = .term (.prob p left right))
(hrel : ChannelConfigRel D_0 j_0 realize s answer)
(hleft :

```

```

forall semanticEnv k (quantum : SubNormalizedDensity 2),
  EnvRel D_0 j_0 realize s.env semanticEnv ->
  StackRel D_0 j_0 realize s.stack k ->
  PresentedChannelConfigCompleteness D_0 j_0 realize
    {s with control := .term left, quantum := quantum}
    (k (interp (hardwarePrimitive D_0 j_0 realize) left
      semanticEnv)))
(hright :
  forall semanticEnv k (quantum : SubNormalizedDensity 2),
    EnvRel D_0 j_0 realize s.env semanticEnv ->
    StackRel D_0 j_0 realize s.stack k ->
    PresentedChannelConfigCompleteness D_0 j_0 realize
      {s with control := .term right, quantum := quantum}
      (k (interp (hardwarePrimitive D_0 j_0 realize) right
        semanticEnv))) :
  PresentedChannelConfigCompleteness D_0 j_0 realize s answer := by
obtain <semanticEnv, k, henv, hstack, rfl> :=
  channelConfigRel_term_inv D_0 j_0 hc hrel
refine
  { related := hrel
    complete :=
      PresentedChannelTreeCompleteness.congr
        (show {s with control := .term (.prob p left right)} = s from
          ChannelConfig.ext hc.symm rfl rfl rfl)
        rfl ?_ }
if hI : 0 <= p /\ p <= 1 then
  if hp0 : p = 0 then
    subst p
    exact prob_zero_stacked_presentedChannelTreeCompleteness
      D_0 j_0 realize s left right semanticEnv k
      (HardwareLogicalRelation.stackRel_map_prob
        (D_0 := D_0) (j_0 := j_0) hstack 0)
      (hright semanticEnv k s.quantum henv hstack).complete
  else if hp1 : p = 1 then
    subst p
    exact prob_one_stacked_presentedChannelTreeCompleteness
      D_0 j_0 realize s left right semanticEnv k
      (HardwareLogicalRelation.stackRel_map_prob
        (D_0 := D_0) (j_0 := j_0) hstack 1)
      (hleft semanticEnv k s.quantum henv hstack).complete
  else
    have hp_0 : 0 < p := lt_of_le_of_ne hI.1 (Ne.symm hp0)
    have hp_1 : p < 1 := lt_of_le_of_ne hI.2 hp1
    exact prob_stacked_presented_of_presented_children
      D_0 j_0 realize s p hp_0 hp_1 left right semanticEnv k
      (HardwareLogicalRelation.stackRel_map_prob
        (D_0 := D_0) (j_0 := j_0) hstack p)
      (hleft semanticEnv k
        (applyOperation
          (sourceProbabilityOperation p hp_0.le hp_1.le) s.quantum)
        henv hstack).complete
      (hright semanticEnv k
        (applyOperation
          (sourceProbabilityOperation (1 - p)
            (sub_nonneg.mpr hp_1.le) (by linarith))
            s.quantum)
        henv hstack).complete
  else
    exact prob_invalid_stacked_presentedChannelTreeCompleteness
      D_0 j_0 realize s p hI left right semanticEnv k
      (HardwareLogicalRelation.stackRel_map_prob
        (D_0 := D_0) (j_0 := j_0) hstack p)

```

```

theorem taggedEmbed_coordinateConstant {D : Type} [CompleteLattice D]
  (? : FiniteInstrumentComp 2 D) :
  CoordinateConstant (taggedEmbed ?) := by
  intro i j
  rfl

theorem intern_coordinateConstant
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (q r : HSemanticComp D_0 j_0)
  (hq : CoordinateConstant q)
  (hr : CoordinateConstant r) :
  CoordinateConstant
    (HasComputationChoice.intern (q, r)) := by
  intro i j
  rw [TTContinuation.computation_intern_apply,
    TTContinuation.computation_intern_apply, hq i j, hr i j]

theorem prob_coordinateConstant
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (p : Prob) (q r : HSemanticComp D_0 j_0)
  (hq : CoordinateConstant q)
  (hr : CoordinateConstant r) :
  CoordinateConstant
    (HasComputationChoice.prob p (q, r)) := by
  intro i j
  rw [TTContinuation.computation_prob_apply,
    TTContinuation.computation_prob_apply, hq i j, hr i j]

theorem adminNoApp_interp_coordinateConstant {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {code : Term (QubitPrimitive C)}
  (hadmin : AdminNoApp code)
  (semanticEnv : Env (HSemanticValue D_0 j_0)) :
  CoordinateConstant
    (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv) := by
  induction code with
  | var y =>
    intro i j
    rfl
  | app _ _ =>
    exact False.elim hadmin
  | lam _ _ _ =>
    intro i j
    rfl
  | recLam _ _ _ _ =>
    intro i j
    rfl
  | intern left right ihL ihR =>
    have <hL, hR> := hadmin
    exact intern_coordinateConstant D_0 j_0
      (interp (hardwarePrimitive D_0 j_0 realize) left semanticEnv)
      (interp (hardwarePrimitive D_0 j_0 realize) right semanticEnv)
      (ihL hL) (ihR hR)
  | extern _ _ _ _ =>
    exact False.elim hadmin
  | prob p left right ihL ihR =>

```

```

    have <hL, hR> := hadmin
    exact prob_coordianteConstant D_0 j_0 p
      (interp (hardwarePrimitive D_0 j_0 realize) left semanticEnv)
      (interp (hardwarePrimitive D_0 j_0 realize) right semanticEnv)
      (ihL hL) (ihR hR)
| prim prim =>
  cases prim with
  | ret _ =>
    intro i j
    rfl
  | pauliX value =>
    simpa [interp_prim_apply, hardwarePrimitive_pauliX] using
      taggedEmbed_coordinateConstant
      (FiniteInstrumentComp.ofOperation Qubit.pauliXOp
        (realize value))
  | measureZ _ _ =>
    exact False.elim hadmin

theorem semanticUnfold_lambdaValue
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (x : Name)
  (body : ScottMap (Env (HSemanticValue D_0 j_0)) (HSemanticComp D_0 j_0))
  (? : Env (HSemanticValue D_0 j_0))
  (d : HSemanticValue D_0 j_0) :
  semanticUnfold (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0)
    (lambdaValue (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0) x body ?) d =
  body (envUpdate (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0) x (?, d)) := by
change
  qEmbInfInf (QModel (TTEExternalContinuationPower 2)) D_0 j_0
    (qProjInfInf (QModel (TTEExternalContinuationPower 2)) D_0 j_0
      (scottLambda
        (body.comp
          (envUpdate (Q := TTEExternalContinuationPower 2)
            (D_0 := D_0) (j_0 := j_0) x))
        ?)) d =
  body (envUpdate (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0) x (?, d))
rw [qEmbInfInf_qProjInfInf]
rfl

/-- Unfolding a recursive lambda once exposes its body with both the
recursive self value and the argument installed. -/
theorem semanticUnfold_recLambdaValue
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (self x : Name)
  (body : ScottMap (Env (HSemanticValue D_0 j_0)) (HSemanticComp D_0 j_0))
  (? : Env (HSemanticValue D_0 j_0))
  (d : HSemanticValue D_0 j_0) :
  semanticUnfold (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0)
    (recLambdaValue (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0) self x body ?) d =
  body
    (envUpdate (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0) x
      (envUpdate (Q := TTEExternalContinuationPower 2)

```

```

      (D_0 := D_0) (j_0 := j_0) self
    (? ,
      recLambdaValue (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0) self x body ?),
    d)) := by
rw [recLambdaValue_unfold]
change
  qEmbInfInf (QModel (TTEExternalContinuationPower 2)) D_0 j_0
  (qProjInfInf (QModel (TTEExternalContinuationPower 2)) D_0 j_0
    (scottLambda
      (body.comp
        ((envUpdate (Q := TTEExternalContinuationPower 2)
          (D_0 := D_0) (j_0 := j_0) x).comp
          (ScottMap.pairMap
            ((envUpdate (Q := TTEExternalContinuationPower 2)
              (D_0 := D_0) (j_0 := j_0) self).comp
              ScottMap.fstMap)
            ScottMap.sndMap)))
        (? ,
          recLambdaValue (Q := TTEExternalContinuationPower 2)
            (D_0 := D_0) (j_0 := j_0) self x body ?))) d =
  -
rw [qEmbInfInf_qProjInfInf]
rw [ <- recLambdaValue_unfold]
rfl

theorem semanticBind_select_of_unfold_constant
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (f : HSemanticValue D_0 j_0)
  (hf : forall d, CoordinateConstant
    (semanticUnfold (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0) f d))
  (q : HSemanticComp D_0 j_0)
  (b : Bool) :
  TTContinuation.selectBranch b
    (semanticBind (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0)
      (semanticUnfold (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0) f) q) =
  semanticBind (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0)
    (semanticUnfold (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0) f)
    (TTContinuation.selectBranch b q) :=
  TTContinuation.selectBranch_taggedBind_of_coordinateConstant
    (semanticUnfold (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0) f) hf q b

theorem semanticBind_root_bot
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (h : ScottMap (HSemanticValue D_0 j_0) (HSemanticComp D_0 j_0))
  (q : HSemanticComp D_0 j_0)
  (hq : q 0 = False) :
  semanticBind (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0) h q 0 =
  False :=
  TTContinuation.taggedBind_root_bot h q hq

/-- Every stack continuation is root-strict: if the current computation is

```

```

`False` at the unresolved root, so is its image under the Kleisli stack map. -/
theorem stackRel_root_bot {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  {realize : C -> HSemanticValue D_0 j_0}
  {stack : EvalStack C}
  {k : HSemanticComp D_0 j_0 -> HSemanticComp D_0 j_0}
  (hstack : StackRel D_0 j_0 realize stack k)
  {q : HSemanticComp D_0 j_0} (hq : q 0 = False) :
  k q 0 = False := by
induction hstack generalizing q with
| nil => exact hq
| argument arg runtimeEnv semanticEnv rest krest henv hrest ih =>
  exact ih (semanticBind_root_bot D_0 j_0
    (applyContinuation (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0)
      (interp (hardwarePrimitive D_0 j_0 realize) arg) semanticEnv)
    q hq)
| function fn f rest krest hfn hrest ih =>
  exact ih (semanticBind_root_bot D_0 j_0
    (semanticUnfold (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0) f)
    q hq)

```

/-- External choice at a related state is presented-complete once both children are and the stack continuation commutes with selection. Root-strictness is free from `stackRel\_root\_bot`. -/

```

theorem extern_related_presentedChannelConfigCompleteness {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} {left right : Term (QubitPrimitive C)}
  {answer : HSemanticComp D_0 j_0}
  (hc : s.control = .term (.extern left right))
  (hrel : ChannelConfigRel D_0 j_0 realize s answer)
  (hcommute :
    forall semanticEnv k,
      EnvRel D_0 j_0 realize s.env semanticEnv ->
      StackRel D_0 j_0 realize s.stack k ->
      forall selected,
        selectBranch selected
          (k (interp (hardwarePrimitive D_0 j_0 realize)
            (.extern left right) semanticEnv)) =
          k (selectBranch selected
            (interp (hardwarePrimitive D_0 j_0 realize)
              (.extern left right) semanticEnv)))
  (hleft :
    forall semanticEnv k,
      EnvRel D_0 j_0 realize s.env semanticEnv ->
      StackRel D_0 j_0 realize s.stack k ->
      PresentedChannelConfigCompleteness D_0 j_0 realize

```

Lean 4 source (lines 3601–4000)

```

  {s with control := .term left}
  (k (interp (hardwarePrimitive D_0 j_0 realize) left
    semanticEnv)))
(hright :
  forall semanticEnv k,
    EnvRel D_0 j_0 realize s.env semanticEnv ->
    StackRel D_0 j_0 realize s.stack k ->
    PresentedChannelConfigCompleteness D_0 j_0 realize

```



```

      {s with control := .term right}
      (k (interp (hardwarePrimitive D_0 j_0 realize) right
        semanticEnv))) :
    PresentedChannelConfigCompleteness D_0 j_0 realize s answer := by
  obtain <semanticEnv, k, henv, hstack, rfl> :=
    channelConfigRel_term_inv D_0 j_0 hc hrel
  have hroot :
    k (interp (hardwarePrimitive D_0 j_0 realize) (.extern left right)
      semanticEnv) 0 =
      False := by
  have hextern0 :
    interp (hardwarePrimitive D_0 j_0 realize) (.extern left right)
      semanticEnv 0 =
      False := by
  rw [interp_extern_apply]
  exact TTContinuation.externalChoice_root_bot _ _
  exact stackRel_root_bot D_0 j_0 hstack hextern0
  refine
  { related := hrel
    complete :=
      PresentedChannelTreeCompleteness.congr
        (show {s with control := .term (.extern left right)} = s from
          ChannelConfig.ext hc.symm rfl rfl rfl)
        rfl
        (extern_stacked_presentedChannelTreeCompleteness
          D_0 j_0 realize s left right semanticEnv k
            (hcommute semanticEnv k henv hstack)
          hroot
            (hleft semanticEnv k henv hstack).complete
            (hright semanticEnv k henv hstack).complete) }

/-- Extern under a single closure frame whose body is administrative
NoApp. The body must not contain `extern`, otherwise selection would
reindex the residual heap through the closure unfolding. -/
theorem extern_under_closure_nil_presentedChannelConfigCompleteness {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} {left right : Term (QubitPrimitive C)}
  {x : Name} {body : Term (QubitPrimitive C)} {cloEnv : RuntimeEnv C}
  {answer : HSemanticComp D_0 j_0}
  (hc : s.control = .term (.extern left right))
  (hs : s.stack = [.function (.closure x body cloEnv)])
  (hadmin : AdminNoApp body)
  (hrel : ChannelConfigRel D_0 j_0 realize s answer)
  (hleft :
    forall semanticEnv k,
      EnvRel D_0 j_0 realize s.env semanticEnv ->
      StackRel D_0 j_0 realize s.stack k ->
      PresentedChannelConfigCompleteness D_0 j_0 realize
        {s with control := .term left}
        (k (interp (hardwarePrimitive D_0 j_0 realize) left
          semanticEnv)))
  (hright :
    forall semanticEnv k,
      EnvRel D_0 j_0 realize s.env semanticEnv ->
      StackRel D_0 j_0 realize s.stack k ->
      PresentedChannelConfigCompleteness D_0 j_0 realize
        {s with control := .term right}
        (k (interp (hardwarePrimitive D_0 j_0 realize) right
          semanticEnv))) :
  PresentedChannelConfigCompleteness D_0 j_0 realize s answer := by

```

```

refine extern_related_presentedChannelConfigCompleteness
  D_0 j_0 realize hc hrel ?_ hleft hright
* intro semanticEnv k henv hstack selected
  rw [hs] at hstack
  cases hstack
  case function f krest hfn hrest =>
    cases hrest
    cases hfn
    case closure cloSem _ =>
      have hunfold :
        forall d, CoordinateConstant
          (semanticUnfold (Q := TTEExternalContinuationPower 2)
            (D_0 := D_0) (j_0 := j_0)
            (lambdaValue (Q := TTEExternalContinuationPower 2)
              (D_0 := D_0) (j_0 := j_0) x
              (interp (hardwarePrimitive D_0 j_0 realize) body)
              cloSem)
            d) := by
          intro d
          rw [semanticUnfold_lambdaValue]
          exact adminNoApp_interp_coordinateConstant D_0 j_0 realize
            hadmin
            (envUpdate (Q := TTEExternalContinuationPower 2)
              (D_0 := D_0) (j_0 := j_0) x (cloSem, d))
          simp only [id]
          exact semanticBind_select_of_unfold_constant D_0 j_0 _ hunfold
            (interp (hardwarePrimitive D_0 j_0 realize)
              (.extern left right) semanticEnv)
            selected

/-- Extern under a single recursive-closure frame whose body is
administrative NoApp. This is the recursive analogue of
`extern_under_closure_nil_presentedChannelConfigCompleteness`; the
coordinate-constancy side condition is essential. -/
theorem extern_under_recClosure_nil_presentedChannelConfigCompleteness
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} {left right : Term (QubitPrimitive C)}
  {self x : Name} {body : Term (QubitPrimitive C)}
  {cloEnv : RuntimeEnv C} {answer : HSemanticComp D_0 j_0}
  (hc : s.control = .term (.extern left right))
  (hs : s.stack = [.function (.recClosure self x body cloEnv)])
  (hadmin : AdminNoApp body)
  (hrel : ChannelConfigRel D_0 j_0 realize s answer)
  (hleft :
    forall semanticEnv k,
      EnvRel D_0 j_0 realize s.env semanticEnv ->
      StackRel D_0 j_0 realize s.stack k ->
      PresentedChannelConfigCompleteness D_0 j_0 realize
        {s with control := .term left}
        (k (interp (hardwarePrimitive D_0 j_0 realize) left
          semanticEnv)))
  (hright :
    forall semanticEnv k,
      EnvRel D_0 j_0 realize s.env semanticEnv ->
      StackRel D_0 j_0 realize s.stack k ->
      PresentedChannelConfigCompleteness D_0 j_0 realize
        {s with control := .term right}
        (k (interp (hardwarePrimitive D_0 j_0 realize) right
          semanticEnv))) :

```

```

PresentedChannelConfigCompleteness D_0 j_0 realize s answer := by
refine extern_related_presentedChannelConfigCompleteness
  D_0 j_0 realize hc hrel ?_ hleft hright
* intro semanticEnv k henv hstack selected
  rw [hs] at hstack
  cases hstack
  case function f krest hfn hrest =>
    cases hrest
    cases hfn
    case recClosure recSem _ =>
      have hunfold :
        forall d, CoordinateConstant
          (semanticUnfold (Q := TTEExternalContinuationPower 2)
            (D_0 := D_0) (j_0 := j_0)
            (recLambdaValue (Q := TTEExternalContinuationPower 2)
              (D_0 := D_0) (j_0 := j_0) self x
              (interp (hardwarePrimitive D_0 j_0 realize) body)
              recSem)
            d) := by
          intro d
          rw [semanticUnfold_recLambdaValue]
          exact adminNoApp_interp_coordinateConstant D_0 j_0 realize
            hadmin
            (envUpdate (Q := TTEExternalContinuationPower 2)
              (D_0 := D_0) (j_0 := j_0) x
              (envUpdate (Q := TTEExternalContinuationPower 2)
                (D_0 := D_0) (j_0 := j_0) self
                (recSem,
                  recLambdaValue (Q := TTEExternalContinuationPower 2)
                    (D_0 := D_0) (j_0 := j_0) self x
                    (interp (hardwarePrimitive D_0 j_0 realize) body)
                    recSem),
                  d))
            simp only [id]
            exact semanticBind_select_of_unfold_constant D_0 j_0 _ hunfold
              (interp (hardwarePrimitive D_0 j_0 realize)
                (.extern left right) semanticEnv)
              selected

/-- A value under a single closure frame betas to the body at the empty
stack. Application-free bodies are then presented by empty-stack NoApp. -/
theorem value_under_closure_nil_presentedChannelConfigCompleteness {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} {arg : RuntimeValue C} {x : Name}
  {body : Term (QubitPrimitive C)} {cloEnv : RuntimeEnv C}
  {answer : HSemanticComp D_0 j_0}
  (hc : s.control = .value arg)
  (hs : s.stack = [.function (.closure x body cloEnv)])
  (hnoapp : NoApp body)
  (hscoped : ChannelConfig.WellScoped s)
  (hrel : ChannelConfigRel D_0 j_0 realize s answer) :
  PresentedChannelConfigCompleteness D_0 j_0 realize s answer := by
have hse :
  {s with
    control := .value arg
    stack := .function (.closure x body cloEnv) :: []} = s :=
  ChannelConfig.ext hc.symm rfl hs.symm rfl
have hrel' : ChannelConfigRel D_0 j_0 realize
  {s with
    control := .value arg

```

```

      stack := .function (.closure x body cloEnv) :: []}
    answer :=
    hsEq.symm |> hrel
  have hrelBody :=
    channel_config_beta D_0 j_0 (s := s) (x := x) (body := body)
      (closureEnv := cloEnv) (arg := arg) (rest := []) hrel'
  let sBody : ChannelConfig C :=
    {s with
      control := .term body
      env := RuntimeEnv.bind x arg cloEnv
      stack := []}
  have hstepBeta : ChannelInternalStep s sBody := by
    have happ :
      ChannelInternalStep
        {s with
          control := .value arg
          stack := .function (.closure x body cloEnv) :: []}
        sBody :=
      ChannelInternalStep.beta (s := s) (x := x) (body := body)
        (closureEnv := cloEnv) (arg := arg) (rest := [])
    exact hsEq.symm |> happ
  have hscopedBody : ChannelConfig.WellScoped sBody :=
    ChannelInternalStep.preserve_wellScoped hstepBeta hscoped
  obtain <semanticEnv, k, henv, hstack, heq> :=
    channelConfigRel_term_inv D_0 j_0 (code := body) rfl hrelBody
  cases hstack
  have hchild :
    PresentedChannelConfigCompleteness D_0 j_0 realize sBody answer :=
    { related := hrelBody
      complete :=
        PresentedChannelTreeCompleteness.congr rfl heq.symm
          (empty_stack_noapp_presentedChannelTreeCompleteness
            D_0 j_0 realize hnoapp (s := sBody) rfl rfl hscopedBody
              henv) }
  exact beta_presentedChannelConfigCompleteness D_0 j_0 realize
    (s := s) (x := x) (body := body) (closureEnv := cloEnv)
    (arg := arg) (rest := []) hc hs hrel hchild

/-- Pauli-X under a single closure frame applies the operation, then
betas the payload into an application-free body. -/
theorem pauliX_under_closure_nil_presentedChannelConfigCompleteness
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} {value : C} {x : Name}
  {body : Term (QubitPrimitive C)} {cloEnv : RuntimeEnv C}
  {answer : HSemanticComp D_0 j_0}
  (hc : s.control = .term (.prim (.pauliX value)))
  (hs : s.stack = [.function (.closure x body cloEnv)])
  (hnoapp : NoApp body)
  (hscoped : ChannelConfig.WellScoped s)
  (hrel : ChannelConfigRel D_0 j_0 realize s answer) :
  PresentedChannelConfigCompleteness D_0 j_0 realize s answer := by
  have hsPx :
    {s with control := .term (.prim (.pauliX value))} = s :=
    ChannelConfig.ext hc.symm rfl rfl rfl
  obtain <semanticEnv, kStack, henv, hstack, rfl> :=
    channelConfigRel_term_inv D_0 j_0 hc hrel
  rw [hs] at hstack
  cases hstack
  case function f krest hfn hrest =>

```

```

cases hrest
let sVal : ChannelConfig C :=
  {s with
    control := .value (.payload value)
    quantum := applyOperation Qubit.pauliXOp s.quantum}
have hstep : ChannelInternalStep s sVal := by
  have happ :
    ChannelInternalStep
      {s with control := .term (.prim (.pauliX value))}
      sVal :=
        ChannelInternalStep.pauliXPrimitive (s := s) (value := value)
  exact hsPx.symm |> happ
have hscopedVal : ChannelConfig.WellScoped sVal :=
  ChannelInternalStep.preserve_wellScoped hstep hscoped
have hrelVal : ChannelConfigRel D_0 j_0 realize sVal
  ((fun ma =>
    id (semanticBind (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0)
      (semanticUnfold (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0) f) ma))
    (semanticUnit (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0) (realize value))) :=
    <semanticUnit (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0) (realize value),
    fun ma =>
      id (semanticBind (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0)
        (semanticUnfold (Q := TTEExternalContinuationPower 2)
          (D_0 := D_0) (j_0 := j_0) f) ma),
      ControlRel.value _ _ s.env
      (payload_related D_0 j_0 realize value),
      hs.symm |>
      StackRel.function (.closure x body cloEnv) f [] id hfn
      StackRel.nil, rfl>
  have hval :=
    value_under_closure_nil_presentedChannelConfigCompleteness
      D_0 j_0 realize (s := sVal) (arg := .payload value)
      (x := x) (body := body) (cloEnv := cloEnv) rfl hs
    hnoapp hscopedVal hrelVal
  refine
    { related := hrel
      complete := ?_ }
  constructor
  intro selectors i ? k? hk
  have hchildEq :=
    hval.complete.selected_result_eq_channelTree_sup_presented
      selectors i ? k? hk
  have hden :
    interp (hardwarePrimitive D_0 j_0 realize)
      (.prim (.pauliX value)) semanticEnv =
      taggedEmbed
        (FiniteInstrumentComp.ofOperation Qubit.pauliXOp
          (realize value)) := by
      simp [hardwarePrimitive_pauliX]
  have hchildCoord :
    semanticBind (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0)
      (semanticUnfold (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0) f)
      (semanticUnit (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0) (realize value))
      (HardwareAdequacy.encodePath selectors i) k? =
    sSup (channelTreeResults D_0 j_0 realize sVal selectors i

```

```

      k?) := by
    simp only [id] at hchildEq
    rw [ <- selectPath_semanticBind, hchildEq]
  simp only [id]
  rw [hden, selectPath_semanticBind,
    semanticBind_ofOperation_eval D_0 j_0
      (semanticUnfold (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0) f)
      Qubit.paoliXOp (realize value),
    hchildCoord, embed_ofOperation_const_sSup]
  apply le_antisymm
* apply sSup_le
  rintro T <r, <fuel, child, R, hdepth, rfl>, rfl>
  apply le_sSup
  refine <fuel + 1, ChannelTree.internal hstep child,
    wrapInternalRealization D_0 j_0 realize hstep child R, ?_, ?_>
* change child.depth + 1 <= fuel + 1
  omega
* exact
  (restrictedResult_internal_pauliX D_0 j_0 realize hstep hc
    child
      (wrapInternalRealization D_0 j_0 realize hstep child R)
      selectors i ? k? hk).symm
* apply sSup_le
  rintro T <_, tree, R, _, rfl>
  cases tree with
  | terminal hterm =>
    cases hterm.control_eq.symm.trans hc
  | @internal _ t' h next =>
    have ht : t' = sVal :=
      ChannelInternalStep.eq_config_of_pauliX h hc
    subst t'
    rw [restrictedResult_internal_pauliX D_0 j_0 realize h hc
      next R selectors i ? k? hk]
    apply le_sSup
    refine <restrictedResult D_0 j_0 realize next
      (internalChildRealization D_0 j_0 realize h next R)
      selectors i k?,
      <next.depth, next,
        internalChildRealization D_0 j_0 realize h next R,
        le_rfl, rfl>, rfl>
  | external _ hex _ =>
    exact False.elim (ChannelExternalStep.not_prim hex hc)
  | probability _ _ _ _ =>
    cases hc
  | probabilityZero _ =>
    cases hc
  | probabilityOne _ =>
    cases hc
  | measurement _ _ =>
    cases hc

/-- A return under a single closure frame betas to the body at the empty
stack. Application-free bodies are then presented by empty-stack NoApp. -/
theorem ret_under_closure_nil_presentedChannelConfigCompleteness {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} {value : C} {x : Name}
  {body : Term (QubitPrimitive C)} {cloEnv : RuntimeEnv C}
  {answer : HSemanticComp D_0 j_0}
  (hc : s.control = .term (.prim (.ret value)))

```

```

(hs : s.stack = [.function (.closure x body cloEnv)])
(hnoapp : NoApp body)
(hscoped : ChannelConfig.WellScoped s)
(hrel : ChannelConfigRel D_0 j_0 realize s answer) :
PresentedChannelConfigCompleteness D_0 j_0 realize s answer := by
have hsRet :
  {s with control := .term (.prim (.ret value))} = s :=
  ChannelConfig.ext hc.symm rfl rfl rfl
have hrelRet : ChannelConfigRel D_0 j_0 realize
  {s with control := .term (.prim (.ret value))} answer :=
  hsRet.symm |> hrel
have hrelVal :=
  channel_config_return D_0 j_0 hrelRet
have hstackEq :

```

Lean 4 source (lines 4001–4400)

```

  {s with control := .value (.payload value)} =
  {s with
    control := .value (.payload value)
    stack := .function (.closure x body cloEnv) :: []} :=
  ChannelConfig.ext rfl rfl hs rfl
have hrelVal' : ChannelConfigRel D_0 j_0 realize
  {s with
    control := .value (.payload value)
    stack := .function (.closure x body cloEnv) :: []}
  answer :=
  hstackEq |> hrelVal
have hrelBody :=
  channel_config_beta D_0 j_0 (s := s) (x := x) (body := body)
  (closureEnv := cloEnv) (arg := .payload value) (rest := [])
  hrelVal'
let sVal : ChannelConfig C :=
  {s with control := .value (.payload value)}
let sBody : ChannelConfig C :=
  {s with
    control := .term body
    env := RuntimeEnv.bind x (.payload value) cloEnv
    stack := []}
have hstepRet : ChannelInternalStep s sVal := by
  have happ :
    ChannelInternalStep
      {s with control := .term (.prim (.ret value))} sVal :=
    ChannelInternalStep.returnPrimitive (s := s) (value := value)
  have hsrc : s = {s with control := .term (.prim (.ret value))} :=
    ChannelConfig.ext hc rfl rfl rfl
  exact hsrc.symm |> happ
have hstepBeta : ChannelInternalStep sVal sBody := by
  have happ :
    ChannelInternalStep
      {sVal with
        control := .value (.payload value)
        stack := .function (.closure x body cloEnv) :: []}
      sBody :=
    ChannelInternalStep.beta (s := sVal) (x := x) (body := body)
    (closureEnv := cloEnv) (arg := .payload value) (rest := [])
  have hsrc :
    sVal =
      {sVal with
        control := .value (.payload value)
        stack := .function (.closure x body cloEnv) :: []} :=
    ChannelConfig.ext rfl rfl hs rfl
  exact hsrc.symm |> happ
have hscopedBody : ChannelConfig.WellScoped sBody :=

```

```

ChannelInternalStep.preserve_wellScoped hstepBeta
  (ChannelInternalStep.preserve_wellScoped hstepRet hscoped)
obtain <semanticEnv, k, henv, hstack, heq> :=
  channelConfigRel_term_inv D_0 j_0 (code := body) rfl hrelBody
cases hstack
have hchild :
  PresentedChannelConfigCompleteness D_0 j_0 realize sBody answer :=
  { related := hrelBody
    complete :=
      PresentedChannelTreeCompleteness.congr rfl heq.symm
      (empty_stack_noapp_presentedChannelTreeCompleteness
        D_0 j_0 realize hnoapp (s := sBody) rfl rfl hscopedBody
        henv) }
have hval :
  PresentedChannelConfigCompleteness D_0 j_0 realize sVal answer :=
  beta_presentedChannelConfigCompleteness D_0 j_0 realize
  (s := sVal) (x := x) (body := body) (closureEnv := cloEnv)
  (arg := .payload value) (rest := []) rfl hs hrelVal hchild
exact return_presentedChannelConfigCompleteness D_0 j_0 realize
  hc hrel hval

/-- Administrative NoApp terms under a single closure frame are
presented-complete when the body is application-free. -/
theorem admin_noapp_under_closure_nil_presentedChannelConfigCompleteness
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} {code : Term (QubitPrimitive C)} {x : Name}
  {body : Term (QubitPrimitive C)} {cloEnv : RuntimeEnv C}
  {answer : HSemanticComp D_0 j_0}
  (hadmin : AdminNoApp code)
  (hc : s.control = .term code)
  (hs : s.stack = [.function (.closure x body cloEnv)])
  (hnoapp : NoApp body)
  (hscoped : ChannelConfig.WellScoped s)
  (hrel : ChannelConfigRel D_0 j_0 realize s answer) :
  PresentedChannelConfigCompleteness D_0 j_0 realize s answer := by
induction code generalizing s answer with
| var y =>
  have hctl := hscoped.left
  rw [hc] at hctl
  obtain <v, hlookup> := hctl.right y (by simp [free])
  have hsVar :
    {s with control := .term (.var y)} = s :=
    ChannelConfig.ext hc.symm rfl rfl rfl
  have hrelVar : ChannelConfigRel D_0 j_0 realize
    {s with control := .term (.var y)} answer :=
    hsVar.symm |> hrel
  have hrelVal :=
    channel_config_variable D_0 j_0 hlookup hrelVar
  have hscopedVal : ChannelConfig.WellScoped
    {s with control := .value v} :=
    <<hctl.left, hctl.left y v hlookup>, hscoped.right>
  have hval :=
    value_under_closure_nil_presentedChannelConfigCompleteness
      D_0 j_0 realize (s := {s with control := .value v})
      (arg := v) (x := x) (body := body) (cloEnv := cloEnv)
      rfl hs hnoapp hscopedVal hrelVal
  exact variable_presentedChannelConfigCompleteness D_0 j_0 realize
    hc hlookup hrel hval
| app _ _ =>

```



```

    exact False.elim hadmin
| lam y M _ih =>
  have hsLam :
    {s with control := .term (.lam y M)} = s :=
    ChannelConfig.ext hc.symm rfl rfl rfl
  have hrelLam : ChannelConfigRel D_0 j_0 realize
    {s with control := .term (.lam y M)} answer :=
    hsLam.symm |> hrel
  have hrelVal :=
    channel_config_lambda D_0 j_0 (s := s) hrelLam
  have hstepLam : ChannelInternalStep s
    {s with control := .value (.closure y M s.env)} := by
  have happ :
    ChannelInternalStep
    {s with control := .term (.lam y M)}
    {s with control := .value (.closure y M s.env)} :=
    ChannelInternalStep.lambda (s := s) (x := y) (body := M)
  exact hsLam.symm |> happ
  have hscopedVal : ChannelConfig.WellScoped
    {s with control := .value (.closure y M s.env)} :=
    ChannelInternalStep.preserve_wellScoped hstepLam hscoped
  have hval :=
    value_under_closure_nil_presentedChannelConfigCompleteness
    D_0 j_0 realize
    (s := {s with control := .value (.closure y M s.env)})
    (arg := .closure y M s.env) (x := x) (body := body)
    (cloEnv := cloEnv) rfl hs hnoapp hscopedVal hrelVal
  exact lambda_presentedChannelConfigCompleteness D_0 j_0 realize
    hc hrel hval
| recLam self y M _ih =>
  have hsRec :
    {s with control := .term (.recLam self y M)} = s :=
    ChannelConfig.ext hc.symm rfl rfl rfl
  have hrelRec : ChannelConfigRel D_0 j_0 realize
    {s with control := .term (.recLam self y M)} answer :=
    hsRec.symm |> hrel
  have hrelVal :=
    channel_config_recursive D_0 j_0 (s := s) hrelRec
  have hstepRec : ChannelInternalStep s
    {s with control := .value (.recClosure self y M s.env)} := by
  have happ :
    ChannelInternalStep
    {s with control := .term (.recLam self y M)}
    {s with control := .value (.recClosure self y M s.env)} :=
    ChannelInternalStep.recursive (s := s) (self := self)
    (arg := y) (body := M)
  exact hsRec.symm |> happ
  have hscopedVal : ChannelConfig.WellScoped
    {s with control := .value (.recClosure self y M s.env)} :=
    ChannelInternalStep.preserve_wellScoped hstepRec hscoped
  have hval :=
    value_under_closure_nil_presentedChannelConfigCompleteness
    D_0 j_0 realize
    (s := {s with control := .value (.recClosure self y M s.env)})
    (arg := .recClosure self y M s.env) (x := x) (body := body)
    (cloEnv := cloEnv) rfl hs hnoapp hscopedVal hrelVal
  exact recLam_presentedChannelConfigCompleteness D_0 j_0 realize
    hc hrel hval
| intern left right ihL ihR =>
  have <hnaL, hnaR> := hadmin
  have hscopedL :=
    wellScoped_term_child (child := left) hc hscoped
    (fun z hz => by simp [free, hz])

```

```

have hscopedR :=
  wellScoped_term_child (child := right) hc hscoped
    (fun z hz => by simp [free, hz])
refine intern_related_presentedChannelConfigCompleteness
  D_0 j_0 realize hc hrel ?_ ?_
* intro semanticEnv k henv hstack
  exact ihL hnaL (s := {s with control := .term left}) rfl hs
    hscopedL
    <interp (hardwarePrimitive D_0 j_0 realize) left semanticEnv, k,
      ControlRel.term left s.env semanticEnv henv, hstack, rfl>
* intro semanticEnv k henv hstack
  exact ihR hnaR (s := {s with control := .term right}) rfl hs
    hscopedR
    <interp (hardwarePrimitive D_0 j_0 realize) right semanticEnv, k,
      ControlRel.term right s.env semanticEnv henv, hstack, rfl>
| extern _ _ _ =>
  exact False.elim hadmin
| prob p left right ihL ihR =>
  have <hnaL, hnaR> := hadmin
  have hscopedL :=
    wellScoped_term_child (child := left) hc hscoped
      (fun z hz => by simp [free, hz])
  have hscopedR :=
    wellScoped_term_child (child := right) hc hscoped
      (fun z hz => by simp [free, hz])
  refine prob_related_presentedChannelConfigCompleteness
    D_0 j_0 realize hc hrel ?_ ?_
* intro semanticEnv k quantum henv hstack
  exact ihL hnaL
    (s := {s with control := .term left, quantum := quantum})
    rfl hs <hscopedL.left, hscopedL.right>
    <interp (hardwarePrimitive D_0 j_0 realize) left semanticEnv, k,
      ControlRel.term left s.env semanticEnv henv, hstack, rfl>
* intro semanticEnv k quantum henv hstack
  exact ihR hnaR
    (s := {s with control := .term right, quantum := quantum})
    rfl hs <hscopedR.left, hscopedR.right>
    <interp (hardwarePrimitive D_0 j_0 realize) right semanticEnv, k,
      ControlRel.term right s.env semanticEnv henv, hstack, rfl>
| prim prim =>
  cases prim with
  | ret value =>
    exact ret_under_closure_nil_presentedChannelConfigCompleteness
      D_0 j_0 realize hc hs hnoapp hscoped hrel
  | pauliX value =>
    exact pauliX_under_closure_nil_presentedChannelConfigCompleteness
      D_0 j_0 realize hc hs hnoapp hscoped hrel
  | measureZ _ =>
    exact False.elim hadmin

/-- A value under a single recursive-closure frame recBetas to the body
at the empty stack. -/
theorem value_under_recClosure_nil_presentedChannelConfigCompleteness
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} {arg : RuntimeValue C} {self x : Name}
  {body : Term (QubitPrimitive C)} {cloEnv : RuntimeEnv C}
  {answer : HSemanticComp D_0 j_0}
  (hc : s.control = .value arg)
  (hs : s.stack = [.function (.recClosure self x body cloEnv)])

```

```

(hnoapp : NoApp body)
(hscoped : ChannelConfig.WellScoped s)
(hrel : ChannelConfigRel D_0 j_0 realize s answer) :
PresentedChannelConfigCompleteness D_0 j_0 realize s answer := by
have hse :
  {s with
    control := .value arg
    stack :=
      .function (.recClosure self x body cloEnv) :: []} = s :=
ChannelConfig.ext hc.symm rfl hs.symm rfl
have hrel' : ChannelConfigRel D_0 j_0 realize
  {s with
    control := .value arg
    stack :=
      .function (.recClosure self x body cloEnv) :: []}
  answer :=
  hse.symm |> hrel
have hrelBody :=
  channel_config_recBeta D_0 j_0 (s := s) (self := self) (x := x)
  (body := body) (closureEnv := cloEnv) (arg := arg) (rest := [])
  hrel'
let sBody : ChannelConfig C :=
  {s with
    control := .term body
    env :=
      RuntimeEnv.bind x arg
      (RuntimeEnv.bind self
        (.recClosure self x body cloEnv) cloEnv)
    stack := []}
have hstepBeta : ChannelInternalStep s sBody := by
  have happ :
    ChannelInternalStep
    {s with
      control := .value arg
      stack :=
        .function (.recClosure self x body cloEnv) :: []}
    sBody :=
    ChannelInternalStep.recBeta (s := s) (self := self) (x := x)
    (body := body) (closureEnv := cloEnv) (arg := arg) (rest := [])
  exact hse.symm |> happ
have hscopedBody : ChannelConfig.WellScoped sBody :=
  ChannelInternalStep.preserve_wellScoped hstepBeta hscoped
obtain <semanticEnv, k, henv, hstack, heq> :=
  channelConfigRel_term_inv D_0 j_0 (code := body) rfl hrelBody
cases hstack
have hchild :
  PresentedChannelConfigCompleteness D_0 j_0 realize sBody answer :=
  { related := hrelBody
    complete :=
      PresentedChannelTreeCompleteness.congr rfl heq.symm
      (empty_stack_noapp_presentedChannelTreeCompleteness
        D_0 j_0 realize hnoapp (s := sBody) rfl rfl hscopedBody
        henv) }
exact recBeta_presentedChannelConfigCompleteness D_0 j_0 realize
  (s := s) (self := self) (x := x) (body := body)
  (closureEnv := cloEnv) (arg := arg) (rest := []) hc hs hrel hchild

theorem ret_under_recClosure_nil_presentedChannelConfigCompleteness
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)

```

```

{s : ChannelConfig C} {value : C} {self x : Name}
{body : Term (QubitPrimitive C)} {cloEnv : RuntimeEnv C}
{answer : HSemanticComp D_0 j_0}
(hc : s.control = .term (.prim (.ret value)))
(hs : s.stack = [.function (.recClosure self x body cloEnv)])
(hnoapp : NoApp body)
(hscoped : ChannelConfig.WellScoped s)
(hrel : ChannelConfigRel D_0 j_0 realize s answer) :
PresentedChannelConfigCompleteness D_0 j_0 realize s answer := by
have hsRet :
  {s with control := .term (.prim (.ret value))} = s :=
  ChannelConfig.ext hc.symm rfl rfl rfl
have hrelRet : ChannelConfigRel D_0 j_0 realize
  {s with control := .term (.prim (.ret value))} answer :=
  hsRet.symm |> hrel
have hrelVal :=
  channel_config_return D_0 j_0 hrelRet
have hstepRet : ChannelInternalStep s
  {s with control := .value (.payload value)} := by
  have happ :
    ChannelInternalStep
    {s with control := .term (.prim (.ret value))}
    {s with control := .value (.payload value)} :=
    ChannelInternalStep.returnPrimitive (s := s) (value := value)
  exact hsRet.symm |> happ
have hscopedVal : ChannelConfig.WellScoped
  {s with control := .value (.payload value)} :=
  ChannelInternalStep.preserve_wellScoped hstepRet hscoped
have hval :=
  value_under_recClosure_nil_presentedChannelConfigCompleteness
  D_0 j_0 realize
  (s := {s with control := .value (.payload value)})
  (arg := .payload value) (self := self) (x := x) (body := body)
  (cloEnv := cloEnv) rfl hs hnoapp hscopedVal hrelVal
exact return_presentedChannelConfigCompleteness D_0 j_0 realize
  hc hrel hval

theorem pauliX_under_recClosure_nil_presentedChannelConfigCompleteness
{C : Type}
(D_0 : QDomain.{0})
(j_0 : IsContinuousLatticeProjection D_0.carrier
  (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
(realize : C -> HSemanticValue D_0 j_0)
{s : ChannelConfig C} {value : C} {self x : Name}
{body : Term (QubitPrimitive C)} {cloEnv : RuntimeEnv C}
{answer : HSemanticComp D_0 j_0}
(hc : s.control = .term (.prim (.pauliX value)))
(hs : s.stack = [.function (.recClosure self x body cloEnv)])
(hnoapp : NoApp body)
(hscoped : ChannelConfig.WellScoped s)
(hrel : ChannelConfigRel D_0 j_0 realize s answer) :
PresentedChannelConfigCompleteness D_0 j_0 realize s answer := by
have hsPx :
  {s with control := .term (.prim (.pauliX value))} = s :=
  ChannelConfig.ext hc.symm rfl rfl rfl
obtain <semanticEnv, kStack, henv, hstack, rfl> :=
  channelConfigRel_term_inv D_0 j_0 hc hrel
rw [hs] at hstack
cases hstack
case function f krest hfn hrest =>
  cases hrest
  let sVal : ChannelConfig C :=
    {s with

```

```

    control := .value (.payload value)
    quantum := applyOperation Qubit.pauliXOp s.quantum}
have hstep : ChannelInternalStep s sVal := by
  have happ :
    ChannelInternalStep
      {s with control := .term (.prim (.pauliX value))}
      sVal :=
    ChannelInternalStep.pauliXPrimitive (s := s) (value := value)
  exact hsPx.symm |> happ
have hscopedVal : ChannelConfig.WellScoped sVal :=
  ChannelInternalStep.preserve_wellScoped hstep hscoped
have hrelVal : ChannelConfigRel D_0 j_0 realize sVal
  ((fun ma =>
    id (semanticBind (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0)
      (semanticUnfold (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0) f) ma))
    (semanticUnit (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0) (realize value))) :=
  <semanticUnit (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0) (realize value),
  fun ma =>
    id (semanticBind (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0)
      (semanticUnfold (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0) f) ma),
  ControlRel.value _ _ s.env
    (payload_related D_0 j_0 realize value),
  hs.symm |>
    StackRel.function
      (.recClosure self x body cloEnv) f [] id hfn
    StackRel.nil, rfl>
have hval :=
  value_under_recClosure_nil_presentedChannelConfigCompleteness
    D_0 j_0 realize (s := sVal) (arg := .payload value)
    (self := self) (x := x) (body := body) (cloEnv := cloEnv)
    rfl hs hnoapp hscopedVal hrelVal
refine

```

Lean 4 source (lines 4401–4800)

```

{ related := hrel
  complete := ?_ }
constructor
intro selectors i ? k? hk
have hchildEq :=
  hval.complete.selected_result_eq_channelTree_sup_presented
    selectors i ? k? hk
have hden :
  interp (hardwarePrimitive D_0 j_0 realize)
    (.prim (.pauliX value)) semanticEnv =
  taggedEmbed
    (FiniteInstrumentComp.ofOperation Qubit.pauliXOp
      (realize value)) := by
  simp [hardwarePrimitive_pauliX]
have hchildCoord :
  semanticBind (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0)
    (semanticUnfold (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0) f)
    (semanticUnit (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0) (realize value))
    (HardwareAdequacy.encodePath selectors i) k? =
  sSup (channelTreeResults D_0 j_0 realize sVal selectors i

```

```

      k?) := by
    simp only [id] at hchildEq
    rw [ <- selectPath_semanticBind, hchildEq]
  simp only [id]
  rw [hden, selectPath_semanticBind,
    semanticBind_ofOperation_eval D_0 j_0
      (semanticUnfold (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0) f)
      Qubit.paoliXOp (realize value),
    hchildCoord, embed_ofOperation_const_sSup]
  apply le_antisymm
* apply sSup_le
  rintro T <r, <fuel, child, R, hdepth, rfl>, rfl>
  apply le_sSup
  refine <fuel + 1, ChannelTree.internal hstep child,
    wrapInternalRealization D_0 j_0 realize hstep child R, ?_, ?_>
* change child.depth + 1 <= fuel + 1
  omega
* exact
  (restrictedResult_internal_pauliX D_0 j_0 realize hstep hc
    child
      (wrapInternalRealization D_0 j_0 realize hstep child R)
      selectors i ? k? hk).symm
* apply sSup_le
  rintro T <_, tree, R, _, rfl>
  cases tree with
  | terminal hterm =>
    cases hterm.control_eq.symm.trans hc
  | @internal _ t' h next =>
    have ht : t' = sVal :=
      ChannelInternalStep.eq_config_of_pauliX h hc
    subst t'
    rw [restrictedResult_internal_pauliX D_0 j_0 realize h hc
      next R selectors i ? k? hk]
    apply le_sSup
    refine <restrictedResult D_0 j_0 realize next
      (internalChildRealization D_0 j_0 realize h next R)
      selectors i k?,
      <next.depth, next,
        internalChildRealization D_0 j_0 realize h next R,
        le_rfl, rfl>, rfl>
  | external _ hex _ =>
    exact False.elim (ChannelExternalStep.not_prim hex hc)
  | probability _ _ _ =>
    cases hc
  | probabilityZero _ =>
    cases hc
  | probabilityOne _ =>
    cases hc
  | measurement _ _ =>
    cases hc

/-- Administrative NoApp terms under a single recursive-closure frame. -/
theorem admin_noapp_under_recClosure_nil_presentedChannelConfigCompleteness
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} {code : Term (QubitPrimitive C)}
  {self x : Name} {body : Term (QubitPrimitive C)}
  {cloEnv : RuntimeEnv C} {answer : HSemanticComp D_0 j_0}
  (hadmin : AdminNoApp code)

```

```

(hc : s.control = .term code)
(hs : s.stack = [.function (.recClosure self x body cloEnv)])
(hnoapp : NoApp body)
(hscoped : ChannelConfig.WellScoped s)
(hrel : ChannelConfigRel D_0 j_0 realize s answer) :
PresentedChannelConfigCompleteness D_0 j_0 realize s answer := by
induction code generalizing s answer with
| var y =>
  have hctl := hscoped.left
  rw [hc] at hctl
  obtain <v, hlookup> := hctl.right y (by simp [free])
  have hsVar :
    {s with control := .term (.var y)} = s :=
    ChannelConfig.ext hc.symm rfl rfl rfl
  have hrelVar : ChannelConfigRel D_0 j_0 realize
    {s with control := .term (.var y)} answer :=
    hsVar.symm |> hrel
  have hrelVal :=
    channel_config_variable D_0 j_0 hlookup hrelVar
  have hscopedVal : ChannelConfig.WellScoped
    {s with control := .value v} :=
    <<hctl.left, hctl.left y v hlookup>, hscoped.right>
  have hval :=
    value_under_recClosure_nil_presentedChannelConfigCompleteness
      D_0 j_0 realize (s := {s with control := .value v})
      (arg := v) (self := self) (x := x) (body := body)
      (cloEnv := cloEnv) rfl hs hnoapp hscopedVal hrelVal
  exact variable_presentedChannelConfigCompleteness D_0 j_0 realize
    hc hlookup hrel hval
| app _ _ =>
  exact False.elim hadmin
| lam y M _ih =>
  have hslam :
    {s with control := .term (.lam y M)} = s :=
    ChannelConfig.ext hc.symm rfl rfl rfl
  have hrelLam : ChannelConfigRel D_0 j_0 realize
    {s with control := .term (.lam y M)} answer :=
    hslam.symm |> hrel
  have hrelVal :=
    channel_config_lambda D_0 j_0 (s := s) hrelLam
  have hstepLam : ChannelInternalStep s
    {s with control := .value (.closure y M s.env)} := by
  have happ :
    ChannelInternalStep
      {s with control := .term (.lam y M)}
      {s with control := .value (.closure y M s.env)} :=
    ChannelInternalStep.lambda (s := s) (x := y) (body := M)
  exact hslam.symm |> happ
  have hscopedVal : ChannelConfig.WellScoped
    {s with control := .value (.closure y M s.env)} :=
    ChannelInternalStep.preserve_wellScoped hstepLam hscoped
  have hval :=
    value_under_recClosure_nil_presentedChannelConfigCompleteness
      D_0 j_0 realize
      (s := {s with control := .value (.closure y M s.env)})
      (arg := .closure y M s.env) (self := self) (x := x)
      (body := body) (cloEnv := cloEnv) rfl hs hnoapp hscopedVal
      hrelVal
  exact lambda_presentedChannelConfigCompleteness D_0 j_0 realize
    hc hrel hval
| recLam self' y M _ih =>
  have hsRec :
    {s with control := .term (.recLam self' y M)} = s :=

```

```

    ChannelConfig.ext hc.symm rfl rfl rfl
  have hrelRec : ChannelConfigRel D_0 j_0 realize
    {s with control := .term (.recLam self' y M)} answer :=
    hsRec.symm |> hrel
  have hrelVal :=
    channel_config_recursive D_0 j_0 (s := s) hrelRec
  have hstepRec : ChannelInternalStep s
    {s with control := .value (.recClosure self' y M s.env)} := by
    have happ :
      ChannelInternalStep
        {s with control := .term (.recLam self' y M)}
        {s with
          control := .value (.recClosure self' y M s.env)} :=
          ChannelInternalStep.recursive (s := s) (self := self')
          (arg := y) (body := M)
    exact hsRec.symm |> happ
  have hscopedVal : ChannelConfig.WellScoped
    {s with control := .value (.recClosure self' y M s.env)} :=
    ChannelInternalStep.preserve_wellScoped hstepRec hscoped
  have hval :=
    value_under_recClosure_nil_presentedChannelConfigCompleteness
    D_0 j_0 realize
    (s :=
      {s with control := .value (.recClosure self' y M s.env)})
    (arg := .recClosure self' y M s.env) (self := self)
    (x := x) (body := body) (cloEnv := cloEnv) rfl hs hnoapp
    hscopedVal hrelVal
  exact recLam_presentedChannelConfigCompleteness D_0 j_0 realize
    hc hrel hval
| intern left right ihL ihR =>
  have <hnaL, hnaR> := hadmin
  have hscopedL :=
    wellScoped_term_child (child := left) hc hscoped
    (fun z hz => by simp [free, hz])
  have hscopedR :=
    wellScoped_term_child (child := right) hc hscoped
    (fun z hz => by simp [free, hz])
  refine intern_related_presentedChannelConfigCompleteness
    D_0 j_0 realize hc hrel ?_ ?_
  * intro semanticEnv k henv hstack
    exact ihL hnaL (s := {s with control := .term left}) rfl hs
    hscopedL
    <interp (hardwarePrimitive D_0 j_0 realize) left semanticEnv, k,
      ControlRel.term left s.env semanticEnv henv, hstack, rfl>
  * intro semanticEnv k henv hstack
    exact ihR hnaR (s := {s with control := .term right}) rfl hs
    hscopedR
    <interp (hardwarePrimitive D_0 j_0 realize) right semanticEnv, k,
      ControlRel.term right s.env semanticEnv henv, hstack, rfl>
| extern _ _ _ =>
  exact False.elim hadmin
| prob p left right ihL ihR =>
  have <hnaL, hnaR> := hadmin
  have hscopedL :=
    wellScoped_term_child (child := left) hc hscoped
    (fun z hz => by simp [free, hz])
  have hscopedR :=
    wellScoped_term_child (child := right) hc hscoped
    (fun z hz => by simp [free, hz])
  refine prob_related_presentedChannelConfigCompleteness
    D_0 j_0 realize hc hrel ?_ ?_
  * intro semanticEnv k quantum henv hstack
    exact ihL hnaL

```



```

      (s := {s with control := .term left, quantum := quantum})
      rfl hs <hscopedL.left, hscopedL.right>
      <interp (hardwarePrimitive D_0 j_0 realize) left semanticEnv, k,
        ControlRel.term left s.env semanticEnv henv, hstack, rfl>
    * intro semanticEnv k quantum henv hstack
      exact ihR hnaR
      (s := {s with control := .term right, quantum := quantum})
      rfl hs <hscopedR.left, hscopedR.right>
      <interp (hardwarePrimitive D_0 j_0 realize) right semanticEnv, k,
        ControlRel.term right s.env semanticEnv henv, hstack, rfl>
  | prim prim =>
    cases prim with
    | ret value =>
      exact
        ret_under_recClosure_nil_presentedChannelConfigCompleteness
          D_0 j_0 realize hc hs hnoapp hscoped hrel
    | pauliX value =>
      exact
        pauliX_under_recClosure_nil_presentedChannelConfigCompleteness
          D_0 j_0 realize hc hs hnoapp hscoped hrel
    | measureZ _ _ =>
      exact False.elim hadmin

/-- Closed `app (lam x body) (ret c)` with an application-free body is
presented-complete at a normalized start. -/
theorem closed_lam_ret_noapp_presented_channelTreeCompleteness {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (x : Name) (body : Term (QubitPrimitive C)) (value : C)
  (hclosed : Closed (.app (.lam x body) (.prim (.ret value))))
  (hnoapp : NoApp body)
  (quantum : NormalizedDensity 2)
  (semanticEnv : Env (HSemanticValue D_0 j_0)) :
  PresentedChannelTreeCompleteness D_0 j_0 realize
    (initialChannelConfig (.app (.lam x body) (.prim (.ret value))))
    quantum)
  (interp (hardwarePrimitive D_0 j_0 realize)
    (.app (.lam x body) (.prim (.ret value)))) semanticEnv) := by
let code : Term (QubitPrimitive C) :=
  .app (.lam x body) (.prim (.ret value))
let s : ChannelConfig C := initialChannelConfig code quantum
have hc : s.control = .term code := rfl
have hrel :=
  initialChannelConfig_related D_0 j_0 realize code quantum semanticEnv
have hscoped :=
  initialChannelConfig_wellScoped hclosed quantum
have hsApp :
  {s with control := .term (.app (.lam x body) (.prim (.ret value))))} =
  s :=
  ChannelConfig.ext hc.symm rfl rfl rfl
have hrelApp : ChannelConfigRel D_0 j_0 realize
  {s with control := .term (.app (.lam x body) (.prim (.ret value))))}
  (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv) :=
  hsApp.symm |> hrel
have hrelLam :=
  channel_config_application D_0 j_0 (s := s)
  (fn := .lam x body) (arg := .prim (.ret value)) hrelApp
have hrelClo :=
  channel_config_lambda D_0 j_0
  (s := {s with stack := .argument (.prim (.ret value)) s.env :: s.stack})
  hrelLam

```

```

have hrelArg :=
  channel_config_evaluateArgument D_0 j_0
  (s :=
    {s with
      control := .value (.closure x body s.env)
      stack := .argument (.prim (.ret value)) s.env :: s.stack})
  (fn := .closure x body s.env) (arg := .prim (.ret value))
  (callEnv := s.env) (rest := s.stack) hrelClo
let sArg : ChannelConfig C :=
  {s with
    control := .term (.prim (.ret value))
    stack := .function (.closure x body s.env) :: s.stack}
have hstepApp : ChannelInternalStep s
  {s with
    control := .term (.lam x body)
    stack := .argument (.prim (.ret value)) s.env :: s.stack} := by
  have happ :
    ChannelInternalStep
    {s with control := .term (.app (.lam x body) (.prim (.ret value))))}
    {s with
      control := .term (.lam x body)
      stack := .argument (.prim (.ret value)) s.env :: s.stack} :=
    ChannelInternalStep.application (s := s) (fn := .lam x body)
    (arg := .prim (.ret value))
  exact hsApp.symm |> happ
have hstepLam : ChannelInternalStep
  {s with
    control := .term (.lam x body)
    stack := .argument (.prim (.ret value)) s.env :: s.stack}
  {s with
    control := .value (.closure x body s.env)
    stack := .argument (.prim (.ret value)) s.env :: s.stack} :=
  ChannelInternalStep.lambda
  (s := {s with stack := .argument (.prim (.ret value)) s.env :: s.stack})
  (x := x) (body := body)
have hstepArg : ChannelInternalStep
  {s with
    control := .value (.closure x body s.env)
    stack := .argument (.prim (.ret value)) s.env :: s.stack}
  sArg :=
  ChannelInternalStep.evaluateArgument
  (s :=
    {s with
      control := .value (.closure x body s.env)
      stack := .argument (.prim (.ret value)) s.env :: s.stack})
  (fn := .closure x body s.env) (arg := .prim (.ret value))
  (callEnv := s.env) (rest := s.stack)
have hscopedArg : ChannelConfig.WellScoped sArg :=
  ChannelInternalStep.preserve_wellScoped hstepArg
  (ChannelInternalStep.preserve_wellScoped hstepLam
    (ChannelInternalStep.preserve_wellScoped hstepApp hscoped))
have hsArg : sArg.stack = [.function (.closure x body s.env)] := by
  simp [sArg, s, initialChannelConfig, ofConfig, initialConfig]
have harg :
  PresentedChannelConfigCompleteness D_0 j_0 realize sArg
  (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv) :=
  ret_under_closure_nil_presentedChannelConfigCompleteness
  D_0 j_0 realize (s := sArg) (value := value) (x := x) (body := body)
  (cloEnv := s.env) rfl hsArg hnoapp hscopedArg
  (by
    change ChannelConfigRel D_0 j_0 realize
    {s with
      control := .term (.prim (.ret value))

```

```

    env := s.env
    stack := .function (.closure x body s.env) :: s.stack}

-
exact hrelArg)
exact (stacked_lam_app_presentedChannelConfigCompleteness D_0 j_0 realize
  (s := s) (x := x) (body := body) (arg := .prim (.ret value))
  hc hrel harg).complete

/-- Token adequacy for closed `app (lam x body) (ret c)` with an
application-free body. -/
theorem closed_lam_ret_noapp_presented_token_adequacy {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (x : Name) (body : Term (QubitPrimitive C)) (value : C)
  (hclosed : Closed (.app (.lam x body) (.prim (.ret value))))
  (hnoapp : NoApp body)
  (quantum : NormalizedDensity 2)
  (semanticEnv : Env (HSemanticValue D_0 j_0))
  (selectors : List Bool)
  (? : HSemanticValue D_0 j_0 -> FiniteInstrumentComp 2 PUnit.{1})
  (k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2))
  (hk : forall d, k d = (? d).satisfiedTTTheory resultCode)
  (i : Nat) (token : TTObservationToken 2) :
  token in HardwareAdequacy.selectPath selectors
    (interp (hardwarePrimitive D_0 j_0 realize)
      (.app (.lam x body) (.prim (.ret value))) semanticEnv) i k <->
  exists fuel, exists (tree : ChannelTree C
    (initialChannelConfig
      (.app (.lam x body) (.prim (.ret value))) quantum))
    (R : ChannelTreeRealization D_0 j_0 realize tree),
  tree.depth <= fuel /\
  ResultAvailable tree selectors i /\
  TTObservationToken.Holds resultCode token
    ((restrictedInstrument D_0 j_0 realize tree R selectors i).bind
      ?) :=
  presented_channel_tree_token_adequacy_iff D_0 j_0 realize
    (initialChannelConfig (.app (.lam x body) (.prim (.ret value)))
      quantum)
    (interp (hardwarePrimitive D_0 j_0 realize)
      (.app (.lam x body) (.prim (.ret value))) semanticEnv)
    (closed_lam_ret_noapp_presented_channelTreeCompleteness D_0 j_0 realize
      x body value hclosed hnoapp quantum semanticEnv)
    selectors ? k hk i token

/-- Closed `app (lam x body) arg` is presented-complete when the body is
application-free and the argument evaluates by identity steps and intern. -/
theorem closed_lam_admin_noapp_presented_channelTreeCompleteness {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (x : Name) (body arg : Term (QubitPrimitive C))
  (hclosed : Closed (.app (.lam x body) arg))
  (hnoapp : NoApp body) (hadmin : AdminNoApp arg)
  (quantum : NormalizedDensity 2)
  (semanticEnv : Env (HSemanticValue D_0 j_0)) :
  PresentedChannelTreeCompleteness D_0 j_0 realize
    (initialChannelConfig (.app (.lam x body) arg) quantum)
    (interp (hardwarePrimitive D_0 j_0 realize)
      (.app (.lam x body) arg) semanticEnv) := by

```

Lean 4 source (lines 4801–5200)

```

let code : Term (QubitPrimitive C) := .app (.lam x body) arg
let s : ChannelConfig C := initialChannelConfig code quantum
have hc : s.control = .term code := rfl
have hrel :=
  initialChannelConfig_related D_0 j_0 realize code quantum semanticEnv
have hscoped :=
  initialChannelConfig_wellScoped hclosed quantum
have hsApp :
  {s with control := .term (.app (.lam x body) arg)} = s :=
  ChannelConfig.ext hc.symm rfl rfl rfl
have hrelApp : ChannelConfigRel D_0 j_0 realize
  {s with control := .term (.app (.lam x body) arg)}
  (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv) :=
  hsApp.symm |> hrel
have hrelLam :=
  channel_config_application D_0 j_0 (s := s)
  (fn := .lam x body) (arg := arg) hrelApp
have hrelClo :=
  channel_config_lambda D_0 j_0
  (s := {s with stack := .argument arg s.env :: s.stack})
  hrelLam
have hrelArg :=
  channel_config_evaluateArgument D_0 j_0
  (s :=
    {s with
      control := .value (.closure x body s.env)
      stack := .argument arg s.env :: s.stack})
  (fn := .closure x body s.env) (arg := arg)
  (callEnv := s.env) (rest := s.stack) hrelClo
let sArg : ChannelConfig C :=
  {s with
    control := .term arg
    stack := .function (.closure x body s.env) :: s.stack}
have hstepApp : ChannelInternalStep s
  {s with
    control := .term (.lam x body)
    stack := .argument arg s.env :: s.stack} := by
  have happ :
    ChannelInternalStep
    {s with control := .term (.app (.lam x body) arg)}
    {s with
      control := .term (.lam x body)
      stack := .argument arg s.env :: s.stack} :=
    ChannelInternalStep.application (s := s) (fn := .lam x body)
    (arg := arg)
  exact hsApp.symm |> happ
have hstepLam : ChannelInternalStep
  {s with
    control := .term (.lam x body)
    stack := .argument arg s.env :: s.stack}
  {s with
    control := .value (.closure x body s.env)
    stack := .argument arg s.env :: s.stack} :=
  ChannelInternalStep.lambda
  (s := {s with stack := .argument arg s.env :: s.stack})
  (x := x) (body := body)
have hstepArg : ChannelInternalStep
  {s with
    control := .value (.closure x body s.env)
    stack := .argument arg s.env :: s.stack}
  sArg :=
  ChannelInternalStep.evaluateArgument
  (s :=

```

```

    {s with
      control := .value (.closure x body s.env)
      stack := .argument arg s.env :: s.stack}}
    (fn := .closure x body s.env) (arg := arg)
    (callEnv := s.env) (rest := s.stack)
have hscopedArg : ChannelConfig.WellScoped sArg :=
  ChannelInternalStep.preserve_wellScoped hstepArg
  (ChannelInternalStep.preserve_wellScoped hstepLam
    (ChannelInternalStep.preserve_wellScoped hstepApp hscoped))
have hsArg : sArg.stack = [.function (.closure x body s.env)] := by
  simp [sArg, s, initialChannelConfig, ofConfig, initialConfig]
have harg :
  PresentedChannelConfigCompleteness D_0 j_0 realize sArg
  (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv) :=
  admin_noapp_under_closure_nil_presentedChannelConfigCompleteness
  D_0 j_0 realize (s := sArg) (code := arg) (x := x) (body := body)
  (cloEnv := s.env) hadmin rfl hsArg hnoapp hscopedArg
  (by
    change ChannelConfigRel D_0 j_0 realize
    {s with
      control := .term arg
      env := s.env
      stack := .function (.closure x body s.env) :: s.stack}
    exact hrelArg)
exact (stacked_lam_app_presentedChannelConfigCompleteness D_0 j_0 realize
  (s := s) (x := x) (body := body) (arg := arg)
  hc hrel harg).complete

/-- Token adequacy for closed `app (lam x body) arg` with an
application-free body and an administrative NoApp argument. -/
theorem closed_lam_admin_noapp_presented_token_adequacy {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEnternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (x : Name) (body arg : Term (QubitPrimitive C))
  (hclosed : Closed (.app (.lam x body) arg))
  (hnoapp : NoApp body) (hadmin : AdminNoApp arg)
  (quantum : NormalizedDensity 2)
  (semanticEnv : Env (HSemanticValue D_0 j_0))
  (selectors : List Bool)
  (? : HSemanticValue D_0 j_0 -> FiniteInstrumentComp 2 PUnit.{1})
  (k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2))
  (hk : forall d, k d = (? d).satisfiedTTTheory resultCode)
  (i : Nat) (token : TTObservationToken 2) :
  token in HardwareAdequacy.selectPath selectors
  (interp (hardwarePrimitive D_0 j_0 realize)
    (.app (.lam x body) arg) semanticEnv) i k <=>
  exists fuel, exists (tree : ChannelTree C
    (initialChannelConfig (.app (.lam x body) arg) quantum))
  (R : ChannelTreeRealization D_0 j_0 realize tree),
  tree.depth <= fuel /\
  ResultAvailable tree selectors i /\
  TTObservationToken.Holds resultCode token
  ((restrictedInstrument D_0 j_0 realize tree R selectors i).bind
    ?) :=
  presented_channel_tree_token_adequacy_iff D_0 j_0 realize
  (initialChannelConfig (.app (.lam x body) arg) quantum)
  (interp (hardwarePrimitive D_0 j_0 realize)
    (.app (.lam x body) arg) semanticEnv)
  (closed_lam_admin_noapp_presented_channelTreeCompleteness
    D_0 j_0 realize x body arg hclosed hnoapp hadmin quantum semanticEnv)

```

```

    selectors ? k hk i token

/-- Token adequacy for every closed term whose channel-tree completeness
theorem is already proved. -/
theorem closed_term_channel_tree_token_adequacy {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (code : Term (QubitPrimitive C))
  (quantum : NormalizedDensity 2)
  (semanticEnv : Env (HSemanticValue D_0 j_0))
  (hcomplete : ChannelTreeCompleteness D_0 j_0 realize
    (initialChannelConfig code quantum)
    (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv))
  (selectors : List Bool)
  (? : HSemanticValue D_0 j_0 -> FiniteInstrumentComp 2 PUnit.{1})
  (k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2))
  (hk : forall d, k d = (? d).satisfiedTTTheory resultCode)
  (i : Nat) (token : TTObservationToken 2) :
  token in HardwareAdequacy.selectPath selectors
    (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv) i k <->
    exists fuel, exists (tree : ChannelTree C
      (initialChannelConfig code quantum))
      (R : ChannelTreeRealization D_0 j_0 realize tree),
      tree.depth <= fuel /\
      ResultAvailable tree selectors i /\
      TTObservationToken.Holds resultCode token
      ((restrictedInstrument D_0 j_0 realize tree R selectors i).bind
        ?) :=
  initialConfig_channel_tree_token_adequacy_iff D_0 j_0 realize code quantum
    semanticEnv hcomplete selectors ? k hk i token

/-! ## Path-indexed token adequacy -/

/-- One finite channel tree witnesses a token at the active path coordinate.
The final value continuation is supplied separately, so the same predicate can
be transported across administrative CEK steps. -/
def PathChannelTreeTokenWitness {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (start : ChannelConfig C) (active : Nat)
  (? : HSemanticValue D_0 j_0 -> FiniteInstrumentComp 2 PUnit.{1})
  (token : TTObservationToken 2) : Prop :=
exists (tree : ChannelTree C start)
  (R : ChannelTreeRealization D_0 j_0 realize tree),
  ResultAvailable tree [] active /\
  TTObservationToken.Holds resultCode token
  ((restrictedInstrument D_0 j_0 realize tree R [] active).bind ?)

/-- Token-level interface for the path-indexed fundamental theorem.

Besides retaining the logical relation for the current CEK state, it says
exactly that every token in the related result is witnessed by a finite
channel tree at the active coordinate, for every finitely represented final
continuation. -/
structure PathChannelTreeTokenAdequacy {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)

```

```

    (start : ChannelConfig C) (active : Nat)
    (observedStack : ObservedStack C)
    (finalK : ScottMap (HSemanticValue D_0 j_0) (TTResult 2))
    (result : TTResult 2) : Prop where
related :
  PathChannelConfigRel D_0 j_0 realize start active observedStack finalK result
token_iff :
  forall (? : HSemanticValue D_0 j_0 -> FiniteInstrumentComp 2 PUnit.{1}),
    (forall d, finalK d = (? d).satisfiedTTTheory resultCode) ->
      forall token,
        token in result <->
          PathChannelTreeTokenWitness D_0 j_0 realize start active ? token

/-- At a related terminal state, token membership is exactly membership in
the restricted terminal instrument. -/
theorem path_terminal_token_of_restrictedInstrument {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEnternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} (hterminal : ChannelTerminal s)
  (hscoped : ChannelConfig.WellScoped s)
  {active : Nat} {observedStack : ObservedStack C}
  {finalK : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)}
  {result : TTResult 2}
  (hrel : PathChannelConfigRel D_0 j_0 realize
    s active observedStack finalK result)
  (R : ChannelTreeRealization D_0 j_0 realize
    (ChannelTree.terminal hterminal))
  (? : HSemanticValue D_0 j_0 -> FiniteInstrumentComp 2 PUnit.{1})
  (hk : forall d, finalK d = (? d).satisfiedTTTheory resultCode)
  (token : TTObservationToken 2) :
  token in result <->
    TTObservationToken.Holds resultCode token
    ((restrictedInstrument D_0 j_0 realize
      (ChannelTree.terminal hterminal) R [] active).bind ?) := by
rcases hrel with
  <herase, current, currentK, hcontrol, hstack, hresult>
have hobserved : observedStack = [] := by
  cases observedStack with
  | nil => rfl
  | cons frame rest =>
    rw [ObservedStack.erase_cons, hterminal.stack_eq] at herase
    cases herase
subst observedStack
cases hstack
have hnil : StackRel D_0 j_0 realize s.stack id := by
  rw [hterminal.stack_eq]
  exact StackRel.nil
have hconfig : ChannelConfigRel D_0 j_0 realize s current :=
  <current, id, hcontrol, hnil, rfl>
obtain <d, hcurrent, hrealized> :=
  terminal_realized_eq_unit D_0 j_0 hterminal hscoped hconfig R
have hall : forall o, OutcomeCompatible
  (ChannelTree.terminal hterminal) [] active o := by
  intro o
  rcases o with <>
  exact List.nil_prefix
have hresultEq :
  result =
    embed (restrictedInstrument D_0 j_0 realize
      (ChannelTree.terminal hterminal) R [] active) finalK := by
  rw [hresult, hcurrent]

```

```

    rw [congrArg (fun f : ScottMap
      (ScottMap (HSemanticValue D_0 j_0) (TTResult 2)) (TTResult 2) =>
        f finalK)
      (embed_restricted_of_all_compatible D_0 j_0 realize
        (ChannelTree.terminal hterminal) R [] active hall)]
    rw [hrealized, embed_unit]
    rfl
  rw [hresultEq]
  exact token_of_restrictedInstrument D_0 j_0 realize
    (ChannelTree.terminal hterminal) R [] active ? finalK
    (fun o => hk _) token

/-- A related terminal configuration is token-adequate. The realization
argument supplies its canonical finite terminal witness. -/
theorem terminal_pathChannelTreeTokenAdequacy {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} (hterminal : ChannelTerminal s)
  (hscoped : ChannelConfig.WellScoped s)
  {active : Nat} {observedStack : ObservedStack C}
  {finalK : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)}
  {result : TTResult 2}
  (hrel : PathChannelConfigRel D_0 j_0 realize
    s active observedStack finalK result)
  (R : ChannelTreeRealization D_0 j_0 realize
    (ChannelTree.terminal hterminal)) :
  PathChannelTreeTokenAdequacy D_0 j_0 realize
    s active observedStack finalK result where
related := hrel
token_iff := by
  intro ? hk token
  constructor
  * intro htoken
    refine <ChannelTree.terminal hterminal, R, ?_, ?_>
    * simp [ResultAvailable, resultAvailableAt]
    * exact
      (path_terminal_token_of_restrictedInstrument D_0 j_0 realize
        hterminal hscoped hrel R ? hk token).mp htoken
  * rintro <tree, R', _, htoken>
    cases tree with
    | terminal hterminal' =>
      exact
        (path_terminal_token_of_restrictedInstrument D_0 j_0 realize
          hterminal' hscoped hrel R' ? hk token).mpr htoken
    | internal hstep next =>
      exact False.elim
        (ChannelInternalStep.not_value_nil hstep hterminal.control_eq
          hterminal.stack_eq)
    | external _ hstep _ =>
      exact False.elim (by cases hstep <;> cases hterminal.control_eq)
    | probability _ _ _ =>
      cases hterminal.control_eq
    | probabilityZero _ =>
      cases hterminal.control_eq
    | probabilityOne _ =>
      cases hterminal.control_eq
    | measurement _ _ =>
      cases hterminal.control_eq

/-- Token adequacy transfers backwards across a unique-successor
identity-operation step. Instrument observations are transported through the

```



```

unit-sigma outcome reindexing, rather than through lattice-level completeness. -/
theorem identity_step_pathChannelTreeTokenAdequacy {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s t : ChannelConfig C}
  (hstep : ChannelInternalStep s t)
  (hop : channelInternalOperation s = QuantumOperation.identity 2)
  (hunq : forall {t'}, ChannelInternalStep s t' -> t' = t)
  {active : Nat} {sourceObserved childObserved : ObservedStack C}
  {finalK : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)}
  {result : TTResult 2}
  (hsource : PathChannelConfigRel D_0 j_0 realize
    s active sourceObserved finalK result)
  (hchild : PathChannelTreeTokenAdequacy D_0 j_0 realize
    t active childObserved finalK result) :
  PathChannelTreeTokenAdequacy D_0 j_0 realize
    s active sourceObserved finalK result where
related := hsource
token_iff := by
  intro ? hk token
  rw [hchild.token_iff ? hk token]
  constructor
* rintro <tree, R, havail, htoken>
  let sourceTree := ChannelTree.internal hstep tree
  let sourceR :=
    wrapInternalRealization D_0 j_0 realize hstep tree R
  refine <sourceTree, sourceR, havail, ?_>
  apply (token_of_restrictedInstrument D_0 j_0 realize
    sourceTree sourceR [] active ? finalK (fun o => hk _) token).mp
  rw [embed_restricted_internal_of_identity D_0 j_0 realize
    hstep hop tree sourceR [] active]
  exact
    (token_of_restrictedInstrument D_0 j_0 realize
      tree
      (internalChildRealization D_0 j_0 realize hstep tree sourceR)
      [] active ? finalK (fun o => hk _) token).mpr htoken
* rintro <tree, R, havail, htoken>
  cases tree with
  | terminal hterminal =>
    exact False.elim
      (ChannelInternalStep.not_value_nil hstep hterminal.control_eq
        hterminal.stack_eq)
  | @internal _ t' hstep' next =>
    have ht : t' = t := hunq hstep'
    subst t'
    let childR :=
      internalChildRealization D_0 j_0 realize hstep' next R
    refine <next, childR, havail, ?_>
    apply (token_of_restrictedInstrument D_0 j_0 realize
      next childR [] active ? finalK (fun o => hk _) token).mp
    rw [← embed_restricted_internal_of_identity D_0 j_0 realize
      hstep' hop next R [] active]
    exact
      (token_of_restrictedInstrument D_0 j_0 realize
        (ChannelTree.internal hstep' next) R [] active ? finalK
        (fun o => hk _) token).mpr htoken
  | external _ hex _ =>
    exact False.elim (by cases hex <=> cases hstep)
  | probability _ _ _ =>
    cases hstep
  | probabilityZero _ =>

```

```

      cases hstep
    | probabilityOne _ =>
      cases hstep
    | measurement _ _ =>
      cases hstep

/-- Application is an identity step that installs the argument frame at the
active coordinate. The child adequacy is taken at the same coordinate with
the pushed observed stack. -/
theorem application_pathChannelTreeTokenAdequacy {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} {fn arg : Term (QubitPrimitive C)}
  (hc : s.control = .term (.app fn arg))
  {active : Nat} {observedStack : ObservedStack C}
  {finalK : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)}
  {result : TTResult 2}
  (hsource : PathChannelConfigRel D_0 j_0 realize
    s active observedStack finalK result)
  (hchild : PathChannelTreeTokenAdequacy D_0 j_0 realize

```

Lean 4 source (lines 5201–5600)

```

  {s with
    control := .term fn
    stack := .argument arg s.env :: s.stack}
  active ((.argument arg s.env, active) :: observedStack)
  finalK result) :
  PathChannelTreeTokenAdequacy D_0 j_0 realize
    s active observedStack finalK result := by
let t : ChannelConfig C :=
  {s with
    control := .term fn
    stack := .argument arg s.env :: s.stack}
have hstep : ChannelInternalStep s t := by
  have happ :
    ChannelInternalStep
      {s with control := .term (.app fn arg)} t :=
    ChannelInternalStep.application (s := s) (fn := fn) (arg := arg)
  have hs : s = {s with control := .term (.app fn arg)} :=
    ChannelConfig.ext hc rfl rfl rfl
  exact hs.symm |> happ
exact identity_step_pathChannelTreeTokenAdequacy D_0 j_0 realize
  hstep (by simp [channelInternalOperation, hc])
  (fun h' => ChannelInternalStep.eq_of_application h' hc)
  hsource hchild

/-- Argument evaluation restores the saved frame coordinate. The function
value is coordinate-independent, so the parent may have descended through
an external branch; token restriction follows the restored coordinate. -/
theorem evaluateArgument_pathChannelTreeTokenAdequacy {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} {fn : RuntimeValue C}
  {arg : Term (QubitPrimitive C)} {callEnv : RuntimeEnv C}
  {rest : EvalStack C} {active saved : Nat}
  {observedRest : ObservedStack C}
  {finalK : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)}
  {result : TTResult 2}
  (hc : s.control = .value fn)

```

```

(hs : s.stack = .argument arg callEnv :: rest)
(hsource : PathChannelConfigRel D_0 j_0 realize
  s active ((.argument arg callEnv, saved) :: observedRest)
  finalK result)
(hchild : PathChannelTreeTokenAdequacy D_0 j_0 realize
  {s with
    control := .term arg
    env := callEnv
    stack := .function fn :: rest}
  saved ((.function fn, saved) :: observedRest) finalK result) :
PathChannelTreeTokenAdequacy D_0 j_0 realize
  s saved ((.argument arg callEnv, saved) :: observedRest)
  finalK result := by
let t : ChannelConfig C :=
  {s with
    control := .term arg
    env := callEnv
    stack := .function fn :: rest}
have hstep : ChannelInternalStep s t := by
  have happ :
    ChannelInternalStep
      {s with
        control := .value fn
        stack := .argument arg callEnv :: rest} t :=
    ChannelInternalStep.evaluateArgument
      (s := s) (fn := fn) (arg := arg) (callEnv := callEnv)
      (rest := rest)
  have hsrc :
    s = {s with
      control := .value fn
      stack := .argument arg callEnv :: rest} :=
    ChannelConfig.ext hc rfl hs rfl
  exact hsrc.symm |> happ
exact identity_step_pathChannelTreeTokenAdequacy D_0 j_0 realize
  hstep (by simp [channelInternalOperation, hc])
  (fun h' => ChannelInternalStep.eq_of_evaluateArgument h' hc hs)
  (path_channel_config_value_reindex D_0 j_0 hc hsource) hchild

/-- Closure beta pops the function frame and resumes the body at the saved
coordinate. The argument value is coordinate-independent, so the parent
may have a different active coordinate than the frame. -/
theorem beta_pathChannelTreeTokenAdequacy {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} {x : Name}
  {body : Term (QubitPrimitive C)} {closureEnv : RuntimeEnv C}
  {arg : RuntimeValue C} {rest : EvalStack C}
  {active saved : Nat} {observedRest : ObservedStack C}
  {finalK : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)}
  {result : TTResult 2}
  (hc : s.control = .value arg)
  (hs : s.stack = .function (.closure x body closureEnv) :: rest)
  (hsource : PathChannelConfigRel D_0 j_0 realize
    s active
    ((.function (.closure x body closureEnv), saved) :: observedRest)
    finalK result)
  (hchild : PathChannelTreeTokenAdequacy D_0 j_0 realize
    {s with
      control := .term body
      env := RuntimeEnv.bind x arg closureEnv
      stack := rest}

```

```

    saved observedRest finalK result) :
PathChannelTreeTokenAdequacy D_0 j_0 realize
  s saved
  ((.function (.closure x body closureEnv), saved) :: observedRest)
  finalK result := by
let t : ChannelConfig C :=
  {s with
    control := .term body
    env := RuntimeEnv.bind x arg closureEnv
    stack := rest}
have hstep : ChannelInternalStep s t := by
  have happ :
    ChannelInternalStep
      {s with
        control := .value arg
        stack := .function (.closure x body closureEnv) :: rest} t :=
    ChannelInternalStep.beta (s := s) (x := x) (body := body)
      (closureEnv := closureEnv) (arg := arg) (rest := rest)
  have hsrc :
    s = {s with
      control := .value arg
      stack := .function (.closure x body closureEnv) :: rest} :=
    ChannelConfig.ext hc rfl hs rfl
  exact hsrc.symm |> happ
exact identity_step_pathChannelTreeTokenAdequacy D_0 j_0 realize
  hstep (by simp [channelInternalOperation, hc])
  (fun h' => ChannelInternalStep.eq_of_beta h' hc hs)
  (path_channel_config_value_reindex D_0 j_0 hc hsource) hchild

/-- Recursive-closure beta is the same identity wrap as ordinary beta, with
both recursive binders installed in the body environment. -/
theorem recBeta_pathChannelTreeTokenAdequacy {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} {self x : Name}
  {body : Term (QubitPrimitive C)} {closureEnv : RuntimeEnv C}
  {arg : RuntimeValue C} {rest : EvalStack C}
  {active saved : Nat} {observedRest : ObservedStack C}
  {finalK : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)}
  {result : TTResult 2}
  (hc : s.control = .value arg)
  (hs : s.stack =
    .function (.recClosure self x body closureEnv) :: rest)
  (hsource : PathChannelConfigRel D_0 j_0 realize
    s active
    ((.function (.recClosure self x body closureEnv), saved) ::
      observedRest)
    finalK result)
  (hchild : PathChannelTreeTokenAdequacy D_0 j_0 realize
    {s with
      control := .term body
      env :=
        RuntimeEnv.bind x arg
        (RuntimeEnv.bind self
          (.recClosure self x body closureEnv) closureEnv)
      stack := rest}
    saved observedRest finalK result) :
PathChannelTreeTokenAdequacy D_0 j_0 realize
  s saved
  ((.function (.recClosure self x body closureEnv), saved) ::
    observedRest)

```

```

    finalK result := by
let t : ChannelConfig C :=
  {s with
    control := .term body
    env :=
      RuntimeEnv.bind x arg
      (RuntimeEnv.bind self
        (.recClosure self x body closureEnv) closureEnv)
    stack := rest}
have hstep : ChannelInternalStep s t := by
  have happ :
    ChannelInternalStep
    {s with
      control := .value arg
      stack :=
        .function (.recClosure self x body closureEnv) :: rest} t :=
    ChannelInternalStep.recBeta (s := s) (self := self) (x := x)
    (body := body) (closureEnv := closureEnv) (arg := arg)
    (rest := rest)
  have hsrc :
    s = {s with
      control := .value arg
      stack :=
        .function (.recClosure self x body closureEnv) :: rest} :=
    ChannelConfig.ext hc rfl hs rfl
  exact hsrc.symm |> happ
exact identity_step_pathChannelTreeTokenAdequacy D_0 j_0 realize
  hstep (by simp [channelInternalOperation, hc])
  (fun h' => ChannelInternalStep.eq_of_recBeta h' hc hs)
  (path_channel_config_value_reindex D_0 j_0 hc hsource) hchild

/-- Recursive abstraction is an identity step onto the related recursive
closure. Finite `iterateBot` unfoldings describe that closure's tokens;
the operational tree is the identity wrap of the closure value. -/
theorem recursive_pathChannelTreeTokenAdequacy {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} {self arg : Name}
  {body : Term (QubitPrimitive C)}
  (hc : s.control = .term (.recLam self arg body))
  {active : Nat} {observedStack : ObservedStack C}
  {finalK : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)}
  {result : TTResult 2}
  (hsource : PathChannelConfigRel D_0 j_0 realize
    s active observedStack finalK result)
  (hchild : PathChannelTreeTokenAdequacy D_0 j_0 realize
    {s with control := .value (.recClosure self arg body s.env)}
    active observedStack finalK result) :
  PathChannelTreeTokenAdequacy D_0 j_0 realize
    s active observedStack finalK result := by
let t : ChannelConfig C :=
  {s with control := .value (.recClosure self arg body s.env)}
have hstep : ChannelInternalStep s t := by
  have happ :
    ChannelInternalStep
    {s with control := .term (.recLam self arg body)} t :=
    ChannelInternalStep.recursive (s := s) (self := self) (arg := arg)
    (body := body)
  have hs : s = {s with control := .term (.recLam self arg body)} :=
    ChannelConfig.ext hc rfl rfl
  exact hs.symm |> happ

```

```

exact identity_step_pathChannelTreeTokenAdequacy D_0 j_0 realize
  hstep (by simp [channelInternalOperation, hc])
  (fun h' => ChannelInternalStep.eq_of_recursive h' hc)
  hsource hchild

/-- Ordinary abstraction is the same identity wrap onto a related closure. -/
theorem lambda_pathChannelTreeTokenAdequacy {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} {x : Name} {body : Term (QubitPrimitive C)}
  (hc : s.control = .term (.lam x body))
  {active : Nat} {observedStack : ObservedStack C}
  {finalK : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)}
  {result : TTResult 2}
  (hsource : PathChannelConfigRel D_0 j_0 realize
    s active observedStack finalK result)
  (hchild : PathChannelTreeTokenAdequacy D_0 j_0 realize
    {s with control := .value (.closure x body s.env)}
    active observedStack finalK result) :
  PathChannelTreeTokenAdequacy D_0 j_0 realize
    s active observedStack finalK result := by
let t : ChannelConfig C :=
  {s with control := .value (.closure x body s.env)}
have hstep : ChannelInternalStep s t := by
  have happ :
    ChannelInternalStep
      {s with control := .term (.lam x body)} t :=
    ChannelInternalStep.lambda (s := s) (x := x) (body := body)
  have hs : s = {s with control := .term (.lam x body)} :=
    ChannelConfig.ext hc rfl rfl rfl
  exact hs.symm |> happ
exact identity_step_pathChannelTreeTokenAdequacy D_0 j_0 realize
  hstep (by simp [channelInternalOperation, hc])
  (fun h' => ChannelInternalStep.eq_of_lambda h' hc)
  hsource hchild

/-- Variable lookup is an identity step onto the related runtime value. -/
theorem variable_pathChannelTreeTokenAdequacy {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} {x : Name} {v : RuntimeValue C}
  (hc : s.control = .term (.var x))
  (hlookup : RuntimeEnv.lookup x s.env = some v)
  {active : Nat} {observedStack : ObservedStack C}
  {finalK : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)}
  {result : TTResult 2}
  (hsource : PathChannelConfigRel D_0 j_0 realize
    s active observedStack finalK result)
  (hchild : PathChannelTreeTokenAdequacy D_0 j_0 realize
    {s with control := .value v}
    active observedStack finalK result) :
  PathChannelTreeTokenAdequacy D_0 j_0 realize
    s active observedStack finalK result := by
let t : ChannelConfig C := {s with control := .value v}
have hstep : ChannelInternalStep s t := by
  have happ :
    ChannelInternalStep
      {s with control := .term (.var x)} t :=
    ChannelInternalStep.variable (s := s) (x := x) (v := v) hlookup

```

```

have hs : s = {s with control := .term (.var x)} :=
  ChannelConfig.ext hc rfl rfl rfl
exact hs.symm |> happ
exact identity_step_pathChannelTreeTokenAdequacy D_0 j_0 realize
  hstep (by simp [channelInternalOperation, hc])
  (fun h' => ChannelInternalStep.eq_of_variable h' hc hlookup)
hsource hchild

/-- Stacked fundamental lemma for `app (lam x body) arg`.
Application pushes the argument frame, abstraction installs the
closure, and argument evaluation restores that frame's coordinate.
The remaining obligation is adequacy of the argument under the
function frame. -/
theorem stacked_lam_app_pathChannelTreeTokenAdequacy {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} {x : Name}
  {body arg : Term (QubitPrimitive C)}
  (hc : s.control = .term (.app (.lam x body) arg))
  {active : Nat} {observedStack : ObservedStack C}
  {finalK : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)}
  {result : TTResult 2}
  (hsource : PathChannelConfigRel D_0 j_0 realize
    s active observedStack finalK result)
  (harg : PathChannelTreeTokenAdequacy D_0 j_0 realize
    {s with
      control := .term arg
      stack := .function (.closure x body s.env) :: s.stack}
    active
    ((.function (.closure x body s.env), active) :: observedStack)
    finalK result) :
  PathChannelTreeTokenAdequacy D_0 j_0 realize
    s active observedStack finalK result := by
have hAppEq :
  {s with control := .term (.app (.lam x body) arg)} = s :=
  ChannelConfig.ext hc.symm rfl rfl rfl
have hrelLam :
  PathChannelConfigRel D_0 j_0 realize
    {s with
      control := .term (.lam x body)
      stack := .argument arg s.env :: s.stack}
    active ((.argument arg s.env, active) :: observedStack)
    finalK result :=
  path_channel_config_application D_0 j_0
  (hrel := hAppEq.symm |> hsource)
have hrelClo :
  PathChannelConfigRel D_0 j_0 realize
    {s with
      control := .value (.closure x body s.env)
      stack := .argument arg s.env :: s.stack}
    active ((.argument arg s.env, active) :: observedStack)
    finalK result :=
  path_channel_config_lambda D_0 j_0
  (s := {s with stack := .argument arg s.env :: s.stack})
  (hrel := by
    simpa using hrelLam)
have hClo :=
  evaluateArgument_pathChannelTreeTokenAdequacy D_0 j_0 realize
  (s := {s with
    control := .value (.closure x body s.env)
    stack := .argument arg s.env :: s.stack})

```

```

    (fn := .closure x body s.env) (arg := arg)
    (callEnv := s.env) (rest := s.stack)
    (active := active) (saved := active)
    (observedRest := observedStack)
    rfl rfl hrelClo harg
have hLam :=
  lambda_pathChannelTreeTokenAdequacy D_0 j_0 realize
    (s := {s with
      control := .term (.lam x body)
      stack := .argument arg s.env :: s.stack})
    (x := x) (body := body) rfl hrelLam hClo
exact application_pathChannelTreeTokenAdequacy D_0 j_0 realize hc
hsource hLam

/-- Stacked fundamental lemma for `app (recLam self x body) arg`.
The same administrative sequence as ordinary abstraction, installing a
recursive closure. -/
theorem stacked_recLam_app_pathChannelTreeTokenAdequacy {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFuctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} {self x : Name}
  {body arg : Term (QubitPrimitive C)}
  (hc : s.control = .term (.app (.recLam self x body) arg))
  {active : Nat} {observedStack : ObservedStack C}
  {finalK : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)}
  {result : TTResult 2}
  (hsource : PathChannelConfigRel D_0 j_0 realize
    s active observedStack finalK result)
  (harg : PathChannelTreeTokenAdequacy D_0 j_0 realize
    {s with
      control := .term arg
      stack :=
        .function (.recClosure self x body s.env) :: s.stack}
    active
    ((.function (.recClosure self x body s.env), active) ::
      observedStack)
    finalK result) :
  PathChannelTreeTokenAdequacy D_0 j_0 realize
    s active observedStack finalK result := by
have hAppEq :
  {s with control := .term (.app (.recLam self x body) arg)} = s :=
  ChannelConfig.ext hc.symm rfl rfl rfl
have hrelRec :
  PathChannelConfigRel D_0 j_0 realize

```

Lean 4 source (lines 5601–6000)

```

    {s with
      control := .term (.recLam self x body)
      stack := .argument arg s.env :: s.stack}
    active ((.argument arg s.env, active) :: observedStack)
    finalK result :=
  path_channel_config_application D_0 j_0
  (hrel := hAppEq.symm |> hsource)
have hrelClo :
  PathChannelConfigRel D_0 j_0 realize
    {s with
      control := .value (.recClosure self x body s.env)
      stack := .argument arg s.env :: s.stack}
    active ((.argument arg s.env, active) :: observedStack)
    finalK result :=
  path_channel_config_recursive D_0 j_0

```



```

(s := {s with stack := .argument arg s.env :: s.stack})
(hrel := by
  simpa using hrelRec)
have hClo :=
  evaluateArgument_pathChannelTreeTokenAdequacy D_0 j_0 realize
  (s := {s with
    control := .value (.recClosure self x body s.env)
    stack := .argument arg s.env :: s.stack})
  (fn := .recClosure self x body s.env) (arg := arg)
  (callEnv := s.env) (rest := s.stack)
  (active := active) (saved := active)
  (observedRest := observedStack)
  rfl rfl hrelClo harg
have hRec :=
  recursive_pathChannelTreeTokenAdequacy D_0 j_0 realize
  (s := {s with
    control := .term (.recLam self x body)
    stack := .argument arg s.env :: s.stack})
  (self := self) (arg := x) (body := body) rfl hrelRec hClo
exact application_pathChannelTreeTokenAdequacy D_0 j_0 realize hc
hsource hRec

/-- Token adequacy for a Pauli-X primitive at an empty stack. The parent
result is the embedded physical operation, not the child's unit return. -/
theorem pauliX_pathChannelTreeTokenAdequacy {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} {value : C}
  (hc : s.control = .term (.prim (.pauliX value)))
  (hstack : s.stack = [])
  {active : Nat} {observedStack : ObservedStack C}
  {finalK : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)}
  {result : TTResult 2}
  (hsource : PathChannelConfigRel D_0 j_0 realize
    s active observedStack finalK result) :
  PathChannelTreeTokenAdequacy D_0 j_0 realize
    s active observedStack finalK result := by
  refine
    { related := hsource
      token_iff := ?_ }
  intro ? hk token
  rcases hsource with
    <herase, current, currentK, hcontrol, hstackRel, hresult>
  have hobserved : observedStack = [] := by
    cases observedStack with
    | nil => rfl
    | cons frame rest =>
      rw [ObservedStack.erase_cons, hstack] at herase
      cases herase
  subst observedStack
  cases hstackRel
  rw [hc] at hcontrol
  cases hcontrol with
  | term _ _ semanticEnv henv =>
    have hresultEq :
      result =
        embed (FiniteInstrumentComp.ofOperation Qubit.pauliXOp
          (realize value)) finalK := by
      rw [hresult, interp_prim_apply, hardwarePrimitive_pauliX,
        taggedEmbed_apply]
    rcases s with <control, env, stack, quantum>

```

```

simp only at hc hstack
subst control
subst stack
let child : ChannelConfig C :=
  { control := .value (.payload value)
    env := env
    stack := []
    quantum := applyOperation Qubit.pauliXOp quantum }
let hterminal : ChannelTerminal child :=
  { value := .payload value
    control_eq := rfl
    stack_eq := rfl }
let childTree : ChannelTree C child :=
  ChannelTree.terminal hterminal
let hstep : ChannelInternalStep
  <.term (.prim (.pauliX value)), env, [], quantum> child :=
  ChannelInternalStep.pauliXPrimitive
  (s := <.term (.prim (.pauliX value)), env, [], quantum>)
  (value := value)
let sourceTree := ChannelTree.internal hstep childTree
let childR : ChannelTreeRealization D_0 j_0 realize childTree :=
  { value := fun _ => realize value
    related := by
      intro o
      change ValueRel D_0 j_0 realize (.payload value) (realize value)
      exact ValueRel.payload value }
let sourceR :=
  wrapInternalRealization D_0 j_0 realize hstep childTree childR
have hembed :
  embed (restrictedInstrument D_0 j_0 realize sourceTree sourceR
    [] active) =
  embed (FiniteInstrumentComp.ofOperation Qubit.pauliXOp
    (realize value)) := by
rw [embed_restricted_internal D_0 j_0 realize hstep childTree sourceR
  [] active]
let ? :=
  (FiniteInstrumentComp.ofOperation Qubit.pauliXOp ().bind
    (fun _ =>
      restrictedInstrument D_0 j_0 realize childTree
        (internalChildRealization D_0 j_0 realize hstep childTree
          sourceR)
        [] active))
let _ : Unique ?.Outcome :=
  { default := <<>, <<>, List.nil_prefix>>
    uniq := by
      intro o
      rcases o with <<>, <<>, _>>
      rfl }
refine embed_eq_ofOperation_of_unique ? Qubit.pauliXOp
  (realize value) ?_ ?_
* intro o
  rfl
* intro o
  change KrausFamily.comp (KrausFamily.identity 2)
    Qubit.pauliXOp.kraus =
    Qubit.pauliXOp.kraus
  simp
constructor
* intro htoken
  refine <sourceTree, sourceR, trivial, ?_>
  apply (token_of_restrictedInstrument D_0 j_0 realize
    sourceTree sourceR [] active ? finalK
    (fun o => hk _) token).mp

```

```

rw [hembed, <- hresultEq]
exact htoken
* rintro <tree, R, havail, htoken>
cases tree with
| terminal hterminal' =>
  cases hterminal'.control_eq
| @internal _ t' hstep' next =>
  have ht :=
    ChannelInternalStep.eq_config_of_pauliX hstep' rfl
  subst t'
  cases next with
  | terminal hterm =>
    have hembed' :
      embed (restrictedInstrument D_0 j_0 realize
        (ChannelTree.internal hstep'
          (ChannelTree.terminal hterm))) R [] active) =
        embed (FiniteInstrumentComp.ofOperation
          Qubit.pauliXOp (realize value)) := by
    have hall' : forall o, OutcomeCompatible
      (ChannelTree.internal hstep'
        (ChannelTree.terminal hterm)) [] active o := by
      intro o
      exact List.nil_prefix
    rw [embed_restricted_of_all_compatible D_0 j_0 realize
      _ R [] active hall']
    let ? := realizedInstrument D_0 j_0 realize
      (ChannelTree.internal hstep'
        (ChannelTree.terminal hterm)) R
    let _ : Unique ?.Outcome :=
      { default := <<>, <>>
        uniq := by
          intro o
          rcases o with <<>, <>>
          rfl }
    refine embed_eq_ofOperation_of_unique ? Qubit.pauliXOp
      (realize value) ? _ ?_
  * intro o
  have hrel := R.related o
  have hpay :
    ((ChannelTree.internal hstep'
      (ChannelTree.terminal hterm)).instrument.value
      o).isTerminal.value =
      .payload value := by
  have hv : hterm.value = .payload value := by
    injection hterm.control_eq with h
    exact h.symm
  simp [ChannelTree.instrument]
  exact hv
  rw [hpay] at hrel
  exact ValueRel.payload_eq D_0 j_0 hrel
  * intro o
  rcases o with <<>, <>>
  change KrausFamily.comp (KrausFamily.identity 2)
    (channelInternalOperation
      <.term (.prim (.pauliX value)), env, [],
      quantum>).kraus =
    Qubit.pauliXOp.kraus
  simp [channelInternalOperation]
  rw [hresultEq, <- hembed']
exact
(token_of_restrictedInstrument D_0 j_0 realize
  (ChannelTree.internal hstep'
    (ChannelTree.terminal hterm))) R [] active ? finalK

```

```

      (fun o => hk _) token).mpr htken
| internal h' _ =>
  exact False.elim
  (ChannelInternalStep.not_value_nil h'
   (ChannelInternalStep.eq_of_pauliX hstep' rfl).1
   ((ChannelInternalStep.eq_of_pauliX hstep' rfl).2.2.1))
| external _ hex _ =>
  exact False.elim
  (ChannelExternalStep.not_value hex
   (ChannelInternalStep.eq_of_pauliX hstep' rfl).1)
| external _ hex _ =>
  exact False.elim (ChannelExternalStep.not_prim hex rfl)

/-- Token adequacy transfers backwards across one selected external edge.
Only the active coordinate descends into the selected child; coordinates
saved in pending frames remain unchanged. -/
theorem external_step_pathChannelTreeTokenAdequacy {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s t : ChannelConfig C} {selected : Bool}
  {left right : Term (QubitPrimitive C)}
  (hc : s.control = .term (.extern left right))
  (hstep : ChannelExternalStep s selected t)
  {childActive : Nat} {observedStack : ObservedStack C}
  {finalK : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)}
  {result : TTResult 2}
  (hsource : PathChannelConfigRel D_0 j_0 realize s
    (HardwareAdequacy.branchCoordinate selected childActive)
    observedStack finalK result)
  (hchild : PathChannelTreeTokenAdequacy D_0 j_0 realize
    t childActive observedStack finalK result) :
  PathChannelTreeTokenAdequacy D_0 j_0 realize s
    (HardwareAdequacy.branchCoordinate selected childActive)
    observedStack finalK result where
related := hsource
token_iff := by
  have ht :
    t = {s with
      control := .term (if selected then right else left)} :=
    ChannelExternalStep.eq_of_extern hstep hc
  subst t
  intro ? hk token
  rw [hchild.token_iff ? hk token]
  constructor
  * rintro <tree, R, havail, htken>
  let sourceTree := ChannelTree.external selected hstep tree
  let sourceR :=
    wrapExternalRealization D_0 j_0 realize selected hstep tree R
  refine <sourceTree, sourceR, ?_, ?_>
  * cases selected
  * change exists rest,
    HardwareAdequacy.coordinatePath
    (HardwareAdequacy.branchCoordinate false childActive) =
    false :: rest /\
    resultAvailableAt tree rest
  exact <HardwareAdequacy.coordinatePath childActive, by simp, havail>
  * change exists rest,
    HardwareAdequacy.coordinatePath
    (HardwareAdequacy.branchCoordinate true childActive) =
    true :: rest /\
    resultAvailableAt tree rest

```

```

    exact <HardwareAdequacy.coordinatePath childActive, by simp, havail>
* apply (token_of_restrictedInstrument D_0 j_0 realize
  sourceTree sourceR []
  (HardwareAdequacy.branchCoordinate selected childActive)
  ? finalK (fun o => hk _) token).mp
rw [embed_restricted_external_coordinate D_0 j_0 realize
  selected hstep tree sourceR childActive]
exact
  (token_of_restrictedInstrument D_0 j_0 realize
    tree
    (externalChildRealization D_0 j_0 realize selected hstep tree sourceR)
    [] childActive ? finalK (fun o => hk _) token).mpr htoken
* rintro <tree, R, havail, htoken>
cases tree with
| terminal hterminal =>
  have := hterminal.control_eq.symm.trans hc
  cases this
| internal hinternal next =>
  exact False.elim (by cases hinternal <=> cases hc)
| @external _ t' selected' hstep' next =>
  have hselected : selected' = selected := by
    cases selected' <=> cases selected
  * rfl
  * exfalso
    rcases havail with <rest, hpath, _>
    rw [HardwareAdequacy.coordinatePath_right] at hpath
    cases hpath
  * exfalso
    rcases havail with <rest, hpath, _>
    rw [HardwareAdequacy.coordinatePath_left] at hpath
    cases hpath
  * rfl
subst selected'
have ht' :
  t' = {s with
    control := .term (if selected then right else left)} :=
  ChannelExternalStep.eq_of_extern hstep' hc
subst t'
let childR :=
  externalChildRealization D_0 j_0 realize selected hstep' next R
refine <next, childR, ?_, ?_>
* rcases havail with <rest, hpath, havailChild>
cases selected
* rw [HardwareAdequacy.coordinatePath_left] at hpath
  injection hpath with hrest
  subst rest
  exact havailChild
* rw [HardwareAdequacy.coordinatePath_right] at hpath
  injection hpath with hrest
  subst rest
  exact havailChild
* apply (token_of_restrictedInstrument D_0 j_0 realize
  next childR [] childActive ? finalK
  (fun o => hk _) token).mp
rw [ <- embed_restricted_external_coordinate D_0 j_0 realize
  selected hstep' next R childActive]
exact
  (token_of_restrictedInstrument D_0 j_0 realize
    (ChannelTree.external selected hstep' next) R []
    (HardwareAdequacy.branchCoordinate selected childActive)
    ? finalK (fun o => hk _) token).mpr htoken
| probability _ _ _ _ =>
  cases hc

```

```

| probabilityZero _ =>
  cases hc
| probabilityOne _ =>
  cases hc
| measurement _ _ =>
  cases hc

/-- Token adequacy aggregates backwards through a strictly interior
probability node. A parent token is assembled from potentially different
branch-local source tokens via `WeightedDerives` and `RoundedBelow`; no
independent-membership interpretation of the parent token is assumed. -/
theorem probability_step_pathChannelTreeTokenAdequacy {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEnternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} {p : ?}
  {left right : Term (QubitPrimitive C)}
  (hp_0 : 0 < p) (hp_1 : p < 1)
  (hc : s.control = .term (.prob p left right))
  {active : Nat} {observedStack : ObservedStack C}
  {finalK : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)}
  {leftResult rightResult result : TTResult 2}
  (hsource : PathChannelConfigRel D_0 j_0 realize
    s active observedStack finalK result)
  (hleft : PathChannelTreeTokenAdequacy D_0 j_0 realize
    {s with
      control := .term left
      quantum := applyOperation
        (sourceProbabilityOperation p hp_0.le hp_1.le) s.quantum}
    active observedStack finalK leftResult)
  (hright : PathChannelTreeTokenAdequacy D_0 j_0 realize
    {s with
      control := .term right
      quantum := applyOperation
        (sourceProbabilityOperation (1 - p)
          (sub_nonneg.mpr hp_1.le) (by linarith)) s.quantum}
    active observedStack finalK rightResult)
  (hresult : result =
    TTWeightedAggregation.weightedResultScott p hp_0.le hp_1.le
      (leftResult, rightResult)) :
  PathChannelTreeTokenAdequacy D_0 j_0 realize
    s active observedStack finalK result := by
refine
  { related := hsource
    token_iff := ?_ }
intro ? hk token
rw [hresult, TTWeightedAggregation.weightedResultScott_interior
  p hp_0 hp_1]
constructor
* intro htoken
  obtain <leftToken, hleftToken, rightToken, hrightToken,
    target, hderives, hrounded> :=
    (TTWeightedAggregation.mem_core p hp_0.le hp_1.le
      leftResult rightResult token).mp htoken
  obtain <leftTree, leftR, hleftAvail, hleftHolds> :=
    (hleft.token_iff ? hk leftToken).mp hleftToken
  obtain <rightTree, rightR, hrightAvail, hrightHolds> :=
    (hright.token_iff ? hk rightToken).mp hrightToken
  rcases s with <control, env, stack, quantum>
  simp only at hc
  subst control
  let sourceTree := ChannelTree.probability hp_0 hp_1 leftTree rightTree

```

```

let sourceR := wrapProbabilityRealization D_0 j_0 realize
  hp_0 hp_1 leftTree rightTree leftR rightR
refine <sourceTree, sourceR, <hleftAvail, hrightAvail>, ?_>
have hleftRestricted :
  leftToken in restrictedResult D_0 j_0 realize leftTree leftR
  [] active finalK := by
  rw [restrictedResult_eq_embed D_0 j_0 realize leftTree leftR

```

Lean 4 source (lines 6001–6400)

```

  [] active finalK hleftAvail]
exact
  (token_of_restrictedInstrument D_0 j_0 realize leftTree leftR
  [] active ? finalK (fun o => hk _) leftToken).mpr hleftHolds
have hrightRestricted :
  rightToken in restrictedResult D_0 j_0 realize rightTree rightR
  [] active finalK := by
  rw [restrictedResult_eq_embed D_0 j_0 realize rightTree rightR
  [] active finalK hrightAvail]
exact
  (token_of_restrictedInstrument D_0 j_0 realize rightTree rightR
  [] active ? finalK (fun o => hk _) rightToken).mpr hrightHolds
have hparentRestricted :
  token in restrictedResult D_0 j_0 realize sourceTree sourceR
  [] active finalK := by
  rw [restrictedResult_probability_presented D_0 j_0 realize
  hp_0 hp_1 leftTree rightTree sourceR [] active ? finalK hk,
  TTWeightedAggregation.weightedResultScott_interior p hp_0 hp_1]
exact
  (TTWeightedAggregation.mem_core p hp_0.le hp_1.le _ _ token).2
  <leftToken, hleftRestricted, rightToken, hrightRestricted,
  target, hderives, hrounded>
apply (token_of_restrictedInstrument D_0 j_0 realize
  sourceTree sourceR [] active ? finalK (fun o => hk _) token).mp
rw [ <- restrictedResult_eq_embed D_0 j_0 realize sourceTree sourceR
  [] active finalK <hleftAvail, hrightAvail>]
exact hparentRestricted
* rintro <tree, parentR, havail, htoken>
cases tree with
| terminal hterminal =>
  have := hterminal.control_eq.symm.trans hc
  cases this
| internal hstep _ =>
  exact False.elim (ChannelInternalStep.not_prob hstep hc)
| external _ hstep _ =>
  exact False.elim (ChannelExternalStep.not_prob hstep hc)
| @probability source p' L rightTerm' hp_0' hp_1' leftTree rightTree =>
  injection hc with hterm
  injection hterm with hp hL hR
  subst p'
  subst L
  subst rightTerm'
rcases havail with <hleftAvail, hrightAvail>
let leftR := probabilityLeftRealization D_0 j_0 realize
  hp_0' hp_1' leftTree rightTree parentR
let rightR := probabilityRightRealization D_0 j_0 realize
  hp_0' hp_1' leftTree rightTree parentR
have hparentRestricted :
  token in restrictedResult D_0 j_0 realize
  (ChannelTree.probability hp_0' hp_1' leftTree rightTree) parentR
  [] active finalK := by
  rw [restrictedResult_eq_embed D_0 j_0 realize
  (ChannelTree.probability hp_0' hp_1' leftTree rightTree) parentR
  [] active finalK <hleftAvail, hrightAvail>]

```

```

exact
  (token_of_restrictedInstrument D_0 j_0 realize
    (ChannelTree.probability hp_0' hp_1' leftTree rightTree) parentR
    [] active ? finalK (fun o => hk _) token).mpr htoken
rw [restrictedResult_probability_presented D_0 j_0 realize
  hp_0' hp_1' leftTree rightTree parentR [] active ? finalK hk,
  TTWeightedAggregation.weightedResultScott_interior p hp_0' hp_1']
at hparentRestricted
obtain <leftToken, hleftRestricted, rightToken, hrightRestricted,
  target, hderives, hrounded> :=
  (TTWeightedAggregation.mem_core p hp_0'.le hp_1'.le _ _ token).mp
  hparentRestricted
have hleftHolds :
  TTObservationToken.Holds resultCode leftToken
  ((restrictedInstrument D_0 j_0 realize leftTree leftR
    [] active).bind ?) := by
  apply (token_of_restrictedInstrument D_0 j_0 realize
    leftTree leftR [] active ? finalK
    (fun o => hk _) leftToken).mp
  rw [ <- restrictedResult_eq_embed D_0 j_0 realize leftTree leftR
    [] active finalK hleftAvail]
  exact hleftRestricted
have hrightHolds :
  TTObservationToken.Holds resultCode rightToken
  ((restrictedInstrument D_0 j_0 realize rightTree rightR
    [] active).bind ?) := by
  apply (token_of_restrictedInstrument D_0 j_0 realize
    rightTree rightR [] active ? finalK
    (fun o => hk _) rightToken).mp
  rw [ <- restrictedResult_eq_embed D_0 j_0 realize rightTree rightR
    [] active finalK hrightAvail]
  exact hrightRestricted
have hleftMember : leftToken in leftResult :=
  (hleft.token_iff ? hk leftToken).mpr
  <leftTree, leftR, hleftAvail, hleftHolds>
have hrightMember : rightToken in rightResult :=
  (hright.token_iff ? hk rightToken).mpr
  <rightTree, rightR, hrightAvail, hrightHolds>
exact
  (TTWeightedAggregation.mem_core p hp_0.le hp_1.le
    leftResult rightResult token).2
  <leftToken, hleftMember, rightToken, hrightMember,
    target, hderives, hrounded>
| probabilityZero _ =>
  injection hc with hterm
  injection hterm with hp
  exact (ne_of_gt hp_0 hp.symm).elim
| probabilityOne _ =>
  injection hc with hterm
  injection hterm with hp
  exact (ne_of_lt hp_1 hp.symm).elim
| measurement _ _ =>
  cases hc

/-- Token adequacy transfers backwards through the endpoint `p = 0`.
The generic source and explicit control equality let tree inversion retain
the source environment, stack, and quantum state definitionally. -/
theorem probabilityZero_step_pathChannelTreeTokenAdequacy {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} {left right : Term (QubitPrimitive C)}

```



```

(hc : s.control = .term (.prob 0 left right))
{active : Nat} {observedStack : ObservedStack C}
{finalK : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)}
{result : TTResult 2}
(hsource : PathChannelConfigRel D_0 j_0 realize
  s active observedStack finalK result)
(hchild : PathChannelTreeTokenAdequacy D_0 j_0 realize
  {s with
    control := .term right
    quantum := applyOperation
      (sourceProbabilityOperation 1 zero_le_one (le_refl 1)) s.quantum}
  active observedStack finalK result) :
PathChannelTreeTokenAdequacy D_0 j_0 realize
  s active observedStack finalK result := by
refine
  { related := hsource
    token_iff := ?_ }
intro ? hk token
rw [hchild.token_iff ? hk token]
constructor
* rintro <tree, R, havail, htoken>
  rcases s with <control, env, stack, quantum>
  simp only at hc
  subst control
  let sourceTree := ChannelTree.probabilityZero
    (s := <.term (.prob 0 left right), env, stack, quantum>)
    (left := left) tree
  let sourceR :=
    wrapProbabilityZeroRealization D_0 j_0 realize
      (leftTerm := left) (rightTerm := right) tree R
  refine <sourceTree, sourceR, havail, ?_>
  apply (token_of_restrictedInstrument D_0 j_0 realize
    sourceTree sourceR [] active ? finalK (fun o => hk _) token).mp
  rw [embed_restricted_probabilityZero D_0 j_0 realize tree sourceR]
  exact
    (token_of_restrictedInstrument D_0 j_0 realize
      tree
      (probabilityZeroRealization D_0 j_0 realize tree sourceR)
      [] active ? finalK (fun o => hk _) token).mpr htoken
* rintro <tree, R, havail, htoken>
  cases tree with
  | terminal hterminal =>
    have := hterminal.control_eq.symm.trans hc
    cases this
  | internal hstep _ =>
    exact False.elim (ChannelInternalStep.not_prob hstep hc)
  | external _ hstep _ =>
    exact False.elim (ChannelExternalStep.not_prob hstep hc)
  | probability hp_0 hp_1 leftTree rightTree =>
    injection hc with hterm
    injection hterm with hp0
    exact (lt_irrefl (0 : ?) (hp0 |> hp_0)).elim
  | @probabilityZero _ L R next =>
    injection hc with hterm
    injection hterm with _ hL hR
    subst hL
    subst hR
    let childR :=
      probabilityZeroRealization D_0 j_0 realize next R
    refine <next, childR, havail, ?_>
    apply (token_of_restrictedInstrument D_0 j_0 realize
      next childR [] active ? finalK (fun o => hk _) token).mp
    rw [ <- embed_restricted_probabilityZero D_0 j_0 realize next R]

```

```

    exact
      (token_of_restrictedInstrument D_0 j_0 realize
        (ChannelTree.probabilityZero next) R [] active
        ? finalK (fun o => hk _) token).mpr htoken
  | probabilityOne _ =>
    injection hc with hterm
    injection hterm with hp01
    exact (one_ne_zero hp01).elim
  | measurement _ _ =>
    cases hc

/-- Token adequacy transfers backwards through the endpoint `p = 1`. -/
theorem probabilityOne_step_pathChannelTreeTokenAdequacy {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} {left right : Term (QubitPrimitive C)}
  (hc : s.control = .term (.prob 1 left right))
  {active : Nat} {observedStack : ObservedStack C}
  {finalK : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)}
  {result : TTResult 2}
  (hsource : PathChannelConfigRel D_0 j_0 realize
    s active observedStack finalK result)
  (hchild : PathChannelTreeTokenAdequacy D_0 j_0 realize
    {s with
      control := .term left
      quantum := applyOperation
        (sourceProbabilityOperation 1 zero_le_one (le_refl 1)) s.quantum}
    active observedStack finalK result) :
  PathChannelTreeTokenAdequacy D_0 j_0 realize
    s active observedStack finalK result := by
  refine
    { related := hsource
      token_iff := ?_ }
  intro ? hk token
  rw [hchild.token_iff ? hk token]
  constructor
  * rintro <tree, R, havail, htoken>
    rcases s with <control, env, stack, quantum>
    simp only at hc
    subst control
    let sourceTree := ChannelTree.probabilityOne
      (s := <.term (.prob 1 left right), env, stack, quantum>)
      (right := right) tree
    let sourceR :=
      wrapProbabilityOneRealization D_0 j_0 realize
        (leftTerm := left) (rightTerm := right) tree R
    refine <sourceTree, sourceR, havail, ?_>
    apply (token_of_restrictedInstrument D_0 j_0 realize
      sourceTree sourceR [] active ? finalK (fun o => hk _) token).mp
    rw [embed_restricted_probabilityOne D_0 j_0 realize tree sourceR]
    exact
      (token_of_restrictedInstrument D_0 j_0 realize
        tree
        (probabilityOneRealization D_0 j_0 realize tree sourceR)
        [] active ? finalK (fun o => hk _) token).mpr htoken
  * rintro <tree, R, havail, htoken>
    cases tree with
  | terminal hterminal =>
    have := hterminal.control_eq.symm.trans hc
    cases this
  | internal hstep _ =>

```

```

    exact False.elim (ChannelInternalStep.not_prob hstep hc)
| external _ hstep _ =>
    exact False.elim (ChannelExternalStep.not_prob hstep hc)
| probability hp_0 hp_1 leftTree rightTree =>
    injection hc with hterm
    injection hterm with hp1
    exact (lt_irrefl (1 : ?) (hp1 |> hp_1)).elim
| probabilityZero _ =>
    injection hc with hterm
    injection hterm with hp10
    exact (zero_ne_one hp10).elim
| @probabilityOne _ L R next =>
    injection hc with hterm
    injection hterm with _ hL hR
    subst hL
    subst hR
    let childR :=
        probabilityOneRealization D_0 j_0 realize next R
    refine <next, childR, havail, ?_>
    apply (token_of_restrictedInstrument D_0 j_0 realize
        next childR [] active ? finalK (fun o => hk _) token).mp
    rw [ <- embed_restricted_probabilityOne D_0 j_0 realize next R]
    exact
        (token_of_restrictedInstrument D_0 j_0 realize
            (ChannelTree.probabilityOne next) R [] active
            ? finalK (fun o => hk _) token).mpr htoken
| measurement _ _ =>
    cases hc

/-! ### Measurement aggregation -/

/-- Two branch-local observations force a target observation after a physical
computational-basis measurement. The two source tokens are independent;
membership of one parent token in both branches is not assumed. -/
def MeasurementDerives
  (zero one target : TTObservationToken 2) : Prop :=
  forall ? ? : FiniteInstrumentComp 2 PUnit.{1},
    TTObservationToken.Holds resultCode zero ? ->
    TTObservationToken.Holds resultCode one ? ->
    TTObservationToken.Holds resultCode target
    (Qubit.measureZComp.bind (fun b => if b then ? else ?))

/-- Rounded token aggregation for computational-basis measurement. This is
the measurement-specialized form of `TTTokenTheory.aggregateResult`; it takes
two unrelated branch theories rather than incorrectly requiring one token to
belong to both. -/
noncomputable def measurementResult
  (zeroResult oneResult : TTResult 2) : TTResult 2 :=
  sSup {T | exists zero in zeroResult, exists one in oneResult, exists target,
    MeasurementDerives zero one target /\
    T = RoundedTheory.principal
    (TTObservationToken.roundedBasis resultCode) target}

theorem mem_measurementResult
  (zeroResult oneResult : TTResult 2) (token : TTObservationToken 2) :
  token in measurementResult zeroResult oneResult <->
  exists zero in zeroResult, exists one in oneResult, exists target,
    MeasurementDerives zero one target /\
    TTObservationToken.RoundedBelow resultCode token target := by
  rw [measurementResult, RoundedTheory.mem_sSup]
  constructor
  * rintro <T, <zero, hzero, one, hone, target, hderives, rfl>, ht>
  exact <zero, hzero, one, hone, target, hderives,

```

```

(RoundedTheory.mem_principal
  (B := TTObservationToken.roundedBasis resultCode)).mp ht>
* rintro <zero, hzero, one, hone, target, hderives, ht>
exact
  <RoundedTheory.principal
    (TTObservationToken.roundedBasis resultCode) target,
    <zero, hzero, one, hone, target, hderives, rfl>,
    (RoundedTheory.mem_principal
      (B := TTObservationToken.roundedBasis resultCode)).2 ht>

/-- The token-generated measurement aggregate agrees with physical
`measureZ` bind whenever both branches are finite result instruments. -/
theorem measurementResult_satisfied
  (? ? : FiniteInstrumentComp 2 PUnit.{1}) :
  measurementResult
    (? .satisfiedTTTheory resultCode)
    (? .satisfiedTTTheory resultCode) =
  (Qubit.measureZComp.bind
    (fun b => if b then ? else ?)).satisfiedTTTheory resultCode := by
  apply RoundedTheory.ext
  ext t
  constructor
  * intro ht
  obtain <zero, hzero, one, hone, target, hderives, httarget> :=
    (mem_measurementResult _ _ t).mp ht
  have httarget :
    TTObservationToken.Holds resultCode target
    (Qubit.measureZComp.bind (fun b => if b then ? else ?)) :=
    hderives ? ?
    ((FiniteInstrumentComp.mem_satisfiedTTTheory resultCode ? zero).mp
      hzero)
    ((FiniteInstrumentComp.mem_satisfiedTTTheory resultCode ? one).mp
      hone)
  exact TTObservationToken.roundedBelow_entails resultCode httarget
    (Qubit.measureZComp.bind (fun b => if b then ? else ?)) httarget
  * intro ht
  obtain <target, httarget, httarget> :=
    TTObservationToken.exists_stronglyBelow_holds resultCode
    (Qubit.measureZComp.bind (fun b => if b then ? else ?)) ht
  obtain <sources, hsources, hall> :=
    TTResultApproximation.exists_bind_source_tokens
    Qubit.measureZComp target (fun b => if b then ? else ?) httarget
  let zero := sources false
  let one := sources true
  apply (mem_measurementResult _ _ t).2
  refine <zero, ?_, one, ?_, target, ?_, ?_>
  * apply (FiniteInstrumentComp.mem_satisfiedTTTheory resultCode ? zero).2
    simpa [zero, resultCode, Qubit.measureZComp] using hsources false
  * apply (FiniteInstrumentComp.mem_satisfiedTTTheory resultCode ? one).2
    simpa [one, resultCode, Qubit.measureZComp] using hsources true
  * intro ?' ?' hzero hone
    apply hall (fun b => if b then ?' else ?')
    intro b
    cases b
    * exact hzero
    * exact hone
  * exact <t, TTObservationToken.entails_refl resultCode t, httarget>

/-- At a finitely-presented continuation, an available measurement node is
exactly token aggregation of its restricted children. -/
theorem restrictedResult_measurement_eq_measurementResult {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier

```

```

    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
(realize : C -> HSemanticValue D_0 j_0)
{s : ChannelConfig C} {zeroValue oneValue : C}
(zero : ChannelTree C
  { s with
    control := .value (.payload zeroValue)
    quantum := applyOperation (measurementOperation false) s.quantum })
(one : ChannelTree C
  { s with
    control := .value (.payload oneValue)
    quantum := applyOperation (measurementOperation true) s.quantum })
(R : ChannelTreeRealization D_0 j_0 realize
  (ChannelTree.measurement zero one))
(selectors : List Bool) (i : Nat)
(hzero : ResultAvailable zero selectors i)
(hone : ResultAvailable one selectors i)
(? : HSemanticValue D_0 j_0 -> FiniteInstrumentComp 2 PUnit.{1})
(k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2))
(hk : forall d, k d = (? d).satisfiedTTTheory resultCode) :
restrictedResult D_0 j_0 realize
  (ChannelTree.measurement zero one) R selectors i k =
  measurementResult
    (restrictedResult D_0 j_0 realize zero
      (measurementZeroRealization D_0 j_0 realize zero one R) selectors i k)
    (restrictedResult D_0 j_0 realize one
      (measurementOneRealization D_0 j_0 realize zero one R)
      selectors i k) := by
classical
let zeroR := measurementZeroRealization D_0 j_0 realize zero one R
let oneR := measurementOneRealization D_0 j_0 realize zero one R
let ?Z := restrictedInstrument D_0 j_0 realize zero zeroR selectors i

```

Lean 4 source (lines 6401–6800)

```

let ?0 := restrictedInstrument D_0 j_0 realize one oneR selectors i
let ?M := Qubit.measureZComp.bind
  (fun b => if b then ?0 else ?Z)
have havail_iff :
  ResultAvailable (ChannelTree.measurement zero one) selectors i <=>
    ResultAvailable zero selectors i /\ ResultAvailable one selectors i :=
  Iff.rfl
rw [restrictedResult_eq_embed D_0 j_0 realize
  (ChannelTree.measurement zero one) R selectors i k
  (havail_iff.mpr <hzero, hone>),
restrictedResult_eq_embed D_0 j_0 realize zero zeroR selectors i k hzero,
restrictedResult_eq_embed D_0 j_0 realize one oneR selectors i k hone,
embed_restricted_measurement D_0 j_0 realize zero one R selectors i]
change embed ?M k = measurementResult (embed ?Z k) (embed ?0 k)
calc
  embed ?M k =
    (?M.bind ?).satisfiedTTTheory resultCode :=
    TTPhysicalEmbedding.embed_satisfied ?M ? k (fun _ => hk _)
  _ = (Qubit.measureZComp.bind
    (fun b => (if b then ?0 else ?Z).bind ?)).satisfiedTTTheory
    resultCode := by
  have hassoc :=
    satisfiedTTTheory_bind_assoc Qubit.measureZComp
    (fun b => if b then ?0 else ?Z) ?
  exact hassoc
  _ = (Qubit.measureZComp.bind
    (fun b => if b then ?0.bind ? else ?Z.bind ?)).satisfiedTTTheory
    resultCode := by
  have hif : forall b : Bool,
    (if b then ?0 else ?Z).bind ? =

```

```

        if b then ?0.bind ? else ?Z.bind ? := by
      intro b
      split_ifs <=> rfl
      congr 1
      exact congrArg Qubit.measureZComp.bind (funext hif)
    _ = measurementResult
      ((?Z.bind ?).satisfiedTTTheory resultCode)
      ((?0.bind ?).satisfiedTTTheory resultCode) :=
      (measurementResult_satisfied (?Z.bind ?) (?0.bind ?)).symm
    _ = measurementResult (embed ?Z k) (embed ?0 k) := by
      rw [TTPhysicalEmbedding.embed_satisfied ?Z ? k (fun _ => hk _),
          TTPhysicalEmbedding.embed_satisfied ?0 ? k (fun _ => hk _)]

/-- Token adequacy aggregates backwards through computational-basis
measurement. The branch results correspond to the two unnormalized child
states in `ChannelTree.measurement`; aggregation uses branch-local source
tokens and `MeasurementDerives`, not common-token intersection. -/
theorem measurement_step_pathChannelTreeTokenAdequacy {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEnternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} {zeroValue oneValue : C}
  (hc : s.control =
    .term (.prim (.measureZ zeroValue oneValue)))
  (hscoped : ChannelConfig.WellScoped s)
  {active : Nat} {observedStack : ObservedStack C}
  {finalK : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)}
  {zeroResult oneResult result : TTResult 2}
  (hsource : PathChannelConfigRel D_0 j_0 realize
    s active observedStack finalK result)
  (hzero : PathChannelTreeTokenAdequacy D_0 j_0 realize
    {s with
      control := .value (.payload zeroValue)
      quantum := applyOperation (measurementOperation false) s.quantum}
    active observedStack finalK zeroResult)
  (hone : PathChannelTreeTokenAdequacy D_0 j_0 realize
    {s with
      control := .value (.payload oneValue)
      quantum := applyOperation (measurementOperation true) s.quantum}
    active observedStack finalK oneResult)
  (hresult : result = measurementResult zeroResult oneResult) :
  PathChannelTreeTokenAdequacy D_0 j_0 realize
    s active observedStack finalK result := by
  refine
    { related := hsource
      token_iff := ?_ }
  intro ? hk token
  rw [hresult, mem_measurementResult]
  constructor
  * rintro <zeroToken, hzeroToken, oneToken, honeToken,
    target, hderives, hrounded>
  obtain <zeroTree, zeroR, hzeroAvail, hzeroHolds> :=
    (hzero.token_iff ? hk zeroToken).mp hzeroToken
  obtain <oneTree, oneR, honeAvail, honeHolds> :=
    (hone.token_iff ? hk oneToken).mp honeToken
  rcases s with <control, env, stack, quantum>
  simp only at hc
  subst control
  let sourceTree := ChannelTree.measurement zeroTree oneTree
  let sourceR := wrapMeasurementRealization D_0 j_0 realize
    zeroTree oneTree zeroR oneR
  let projectedZeroR :=

```

```

    measurementZeroRealization D_0 j_0 realize zeroTree oneTree sourceR
let projectedOneR :=
    measurementOneRealization D_0 j_0 realize zeroTree oneTree sourceR
have hzeroScoped : ChannelConfig.WellScoped
  (<.value (.payload zeroValue), env, stack,
    applyOperation (measurementOperation false) quantum> :
    ChannelConfig C) := by
  rcases hscoped with <<henv, _>, hstack>
  exact <<henv, .payload zeroValue>, hstack>
have honeScoped : ChannelConfig.WellScoped
  (<.value (.payload oneValue), env, stack,
    applyOperation (measurementOperation true) quantum> :
    ChannelConfig C) := by
  rcases hscoped with <<henv, _>, hstack>
  exact <<henv, .payload oneValue>, hstack>
have hzeroRestricted :
  zeroToken in restrictedResult D_0 j_0 realize zeroTree zeroR
  [] active finalK := by
  rw [restrictedResult_eq_embed D_0 j_0 realize zeroTree zeroR
    [] active finalK hzeroAvail]
  exact
  (token_of_restrictedInstrument D_0 j_0 realize zeroTree zeroR
    [] active ? finalK (fun o => hk _) zeroToken).mpr hzeroHolds
have honeRestricted :
  oneToken in restrictedResult D_0 j_0 realize oneTree oneR
  [] active finalK := by
  rw [restrictedResult_eq_embed D_0 j_0 realize oneTree oneR
    [] active finalK honeAvail]
  exact
  (token_of_restrictedInstrument D_0 j_0 realize oneTree oneR
    [] active ? finalK (fun o => hk _) oneToken).mpr honeHolds
refine <sourceTree, sourceR, <hzeroAvail, honeAvail>, ?_>
have hparentRestricted :
  token in restrictedResult D_0 j_0 realize sourceTree sourceR
  [] active finalK := by
  rw [restrictedResult_measurement_eq_measurementResult D_0 j_0 realize
    zeroTree oneTree sourceR [] active hzeroAvail honeAvail ? finalK hk,
    <- restrictedResult_eq_of_wellScoped D_0 j_0 realize zeroTree hzeroScoped
    zeroR projectedZeroR [] active ? finalK hk,
    <- restrictedResult_eq_of_wellScoped D_0 j_0 realize oneTree honeScoped
    oneR projectedOneR [] active ? finalK hk]
  exact (mem_measurementResult _ _ token).2
  <zeroToken, hzeroRestricted, oneToken, honeRestricted,
    target, hderives, hrounded>
apply (token_of_restrictedInstrument D_0 j_0 realize
  sourceTree sourceR [] active ? finalK (fun o => hk _) token).mp
rw [ <- restrictedResult_eq_embed D_0 j_0 realize sourceTree sourceR
  [] active finalK <hzeroAvail, honeAvail>]
exact hparentRestricted
* rintro <tree, parentR, havail, htoken>
cases tree with
| terminal hterminal =>
  have := hterminal.control_eq.symm.trans hc
  cases this
| internal hstep _ =>
  exact False.elim (ChannelInternalStep.not_measureZ hstep hc)
| external _ hstep _ =>
  exact False.elim (by cases hstep <;> cases hc)
| probability _ _ _ =>
  cases hc
| probabilityZero _ =>
  cases hc
| probabilityOne _ =>

```

```

cases hc
| @measurement source zeroValue' oneValue' zeroTree oneTree =>
  injection hc with hterm
  injection hterm with hmeasure
  injection hmeasure with hzeroValue honeValue
  subst zeroValue'
  subst oneValue'
  rcases havail with <hzeroAvail, honeAvail>
  let zeroR :=
    measurementZeroRealization D_0 j_0 realize zeroTree oneTree parentR
  let oneR :=
    measurementOneRealization D_0 j_0 realize zeroTree oneTree parentR
  have hparentRestricted :
    token in restrictedResult D_0 j_0 realize
      (ChannelTree.measurement zeroTree oneTree) parentR
    [] active finalK := by
  rw [restrictedResult_eq_embed D_0 j_0 realize
      (ChannelTree.measurement zeroTree oneTree) parentR
    [] active finalK <hzeroAvail, honeAvail>]
  exact
    (token_of_restrictedInstrument D_0 j_0 realize
      (ChannelTree.measurement zeroTree oneTree) parentR
    [] active ? finalK (fun o => hk _) token).mpr htoken
  rw [restrictedResult_measurement_eq_measurementResult D_0 j_0 realize
      zeroTree oneTree parentR [] active hzeroAvail honeAvail ? finalK hk]
  at hparentRestricted
  obtain <zeroToken, hzeroRestricted, oneToken, honeRestricted,
    target, hderives, hrounded> :=
    (mem_measurementResult _ _ token).mp hparentRestricted
  have hzeroHolds :
    TTObservationToken.Holds resultCode zeroToken
      ((restrictedInstrument D_0 j_0 realize zeroTree zeroR
        [] active).bind ?) := by
  apply (token_of_restrictedInstrument D_0 j_0 realize
    zeroTree zeroR [] active ? finalK
    (fun o => hk _) zeroToken).mp
  rw [ <- restrictedResult_eq_embed D_0 j_0 realize zeroTree zeroR
    [] active finalK hzeroAvail]
  exact hzeroRestricted
  have honeHolds :
    TTObservationToken.Holds resultCode oneToken
      ((restrictedInstrument D_0 j_0 realize oneTree oneR
        [] active).bind ?) := by
  apply (token_of_restrictedInstrument D_0 j_0 realize
    oneTree oneR [] active ? finalK
    (fun o => hk _) oneToken).mp
  rw [ <- restrictedResult_eq_embed D_0 j_0 realize oneTree oneR
    [] active finalK honeAvail]
  exact honeRestricted
  have hzeroMember : zeroToken in zeroResult :=
    (hzero.token_iff ? hk zeroToken).mpr
    <zeroTree, zeroR, hzeroAvail, hzeroHolds>
  have honeMember : oneToken in oneResult :=
    (hone.token_iff ? hk oneToken).mpr
    <oneTree, oneR, honeAvail, honeHolds>
  exact <zeroToken, hzeroMember, oneToken, honeMember,
    target, hderives, hrounded>

theorem measureZ_map_bind {D : Type} [Preorder D]
(f : Bool -> D) (? : D -> FiniteInstrumentComp 2 PUnit.{1}) :
(Qubit.measureZComp.map f).bind ? =
  Qubit.measureZComp.bind (fun b => ? (f b)) :=
rfl

```



```

theorem aggregateDerives_measureZ_map_of_measurement {D : Type}
  [CompleteLattice D]
  (f : Bool → D)
  (sources : Bool → TTObservationToken 2)
  (target : TTObservationToken 2)
  (h : MeasurementDerives (sources false) (sources true) target) :
  TTTOKENTheory.AggregateDerives (Qubit.measureZComp.map f) sources
    target := by
intro ? h?
have hholds :=
  h (? (f false)) (? (f true)) (h? false) (h? true)
have hif :
  (fun b : Bool => if b then ? (f true) else ? (f false)) =
    fun b => ? (f b) := by
  funext b
  cases b <;> rfl
change TTObservationToken.Holds _ target
  ((Qubit.measureZComp.map f).bind ?)
rw [measureZ_map_bind, <- hif]
exact hholds

theorem aggregateDerives_measureZ_map_to_measurement {D : Type}
  [CompleteLattice D]
  (f : Bool → D)
  (hf : f false != f true)
  (sources : Bool → TTObservationToken 2)
  (target : TTObservationToken 2)
  (h : TTTOKENTheory.AggregateDerives (Qubit.measureZComp.map f) sources
    target) :
  MeasurementDerives (sources false) (sources true) target := by
intro ? ? h? h?
let g : D → FiniteInstrumentComp 2 PUnit.{1} :=
  fun x => if x = f false then ? else if x = f true then ? else ?
have hg0 : g (f false) = ? := if_pos rfl
have hg1 : g (f true) = ? := by
  have hne : not f true = f false := fun heq => hf heq.symm
  simp [g, hne]
have hholds : forall o : Bool,
  TTObservationToken.Holds resultCode (sources o)
    (g (f o)) := by
  intro o
  cases o
  * simp [hg0] using h?
  * simp [hg1] using h?
have htarget := h g (by
  intro o
  change TTObservationToken.Holds _ (sources o) (g (f o))
  exact hholds o)
have hbind :
  (Qubit.measureZComp.map f).bind g =
    Qubit.measureZComp.bind
      (fun b => if b then ? else ?) := by
  rw [measureZ_map_bind]
  apply congrArg Qubit.measureZComp.bind
  funext b
  cases b
  * exact hg0
  * exact hg1
change TTObservationToken.Holds _ target
  (Qubit.measureZComp.bind (fun b => if b then ? else ?))
rw [ <- hbind]
exact htarget

```

```

theorem embed_measureZ_map_eq_measurementResult_of_ne {D : Type}
  [CompleteLattice D]
  (f : Bool → D) (hf : f false != f true)
  (k : ScottMap D (TResult 2)) :
  embed (Qubit.measureZComp.map f) k =
    measurementResult (k (f false)) (k (f true)) := by
  apply RoundedTheory.ext
  ext t
  constructor
  * intro ht
    obtain <sources, hsources, target, hderives, htt> :=
      (TTTokenTheory.mem_aggregateResult
        (Qubit.measureZComp.map f) k t).mp (by
          simp [embed] using ht)
    apply (mem_measurementResult (k (f false)) (k (f true)) t).2
    refine <sources false, hsources false, sources true, hsources true,
      target, ?_, htt>
    exact aggregateDerives_measureZ_map_to_measurement f hf sources
      target hderives
  * intro ht
    obtain <zero, hzero, one, hone, target, hderives, htt> :=
      (mem_measurementResult (k (f false)) (k (f true)) t).mp ht
    apply (TTTokenTheory.mem_aggregateResult
      (Qubit.measureZComp.map f) k t).2
    refine <fun b : Bool => if b then one else zero, ?_, target, ?_, htt>
  * intro o
    cases o
    * exact hzero
    * exact hone
  * exact aggregateDerives_measureZ_map_of_measurement f
    (fun b : Bool => if b then one else zero) target hderives

theorem embed_measureZ_map_eq_measurementResult_presented {D : Type}
  [CompleteLattice D]
  (f : Bool → D)
  (? : D → FiniteInstrumentComp 2 PUnit.{1})
  (k : ScottMap D (TResult 2))
  (hk : forall x, k x = (? x).satisfiedTTTheory resultCode) :
  embed (Qubit.measureZComp.map f) k =
    measurementResult (k (f false)) (k (f true)) := by
  have hsat :=
    TTPhysicalEmbedding.embed_satisfied (Qubit.measureZComp.map f) ? k
    (fun _ => hk _)
  have hif :
    (fun b : Bool => ? (f b)) =
      fun b => if b then ? (f true) else ? (f false) := by
    funext b
    cases b <|> rfl
  calc
    embed (Qubit.measureZComp.map f) k =
      ((Qubit.measureZComp.map f).bind ?).satisfiedTTTheory resultCode :=
        hsat
    _ = (Qubit.measureZComp.bind (fun b => ? (f b))).satisfiedTTTheory
      resultCode := by
      rw [measureZ_map_bind]
    _ = (Qubit.measureZComp.bind
      (fun b => if b then ? (f true) else ? (f false))).satisfiedTTTheory
      resultCode := by
      rw [hif]
    _ = measurementResult
      ((? (f false)).satisfiedTTTheory resultCode)
      ((? (f true)).satisfiedTTTheory resultCode) :=

```

```

      (measurementResult_satisfied (? (f false)) (? (f true))).symm
    _ = measurementResult (k (f false)) (k (f true)) := by
      rw [hk (f false), hk (f true)]

theorem measurementResult_sSup (A B : Set (TTResult 2)) :
  measurementResult (sSup A) (sSup B) =
    sSup ((fun p : TTResult 2 x TTResult 2 =>
      measurementResult p.1 p.2) '' (A x ? B)) := by
  apply RoundedTheory.ext
  ext t
  constructor
  * intro ht
    change t in
      (measurementResult (sSup A : TTResult 2) (sSup B : TTResult 2)) at ht
    obtain <zero, hzero, one, hone, target, hderives, htt> :=
      (mem_measurementResult _ _ t).mp ht
    change zero in (sSup A : TTResult 2) at hzero
    change one in (sSup B : TTResult 2) at hone
    rw [RoundedTheory.mem_sSup] at hzero
    rw [RoundedTheory.mem_sSup] at hone
    obtain <a, haA, hza> := hzero
    obtain <b, hbB, hob> := hone
    change t in
      (sSup ((fun p : TTResult 2 x TTResult 2 =>
        measurementResult p.1 p.2) '' (A x ? B)) : TTResult 2)
    rw [RoundedTheory.mem_sSup]
    refine <measurementResult a b, ?_, ?_>
    * exact <(a, b), <haA, hbB>, rfl>
    * exact (mem_measurementResult a b t).2
      <zero, hza, one, hob, target, hderives, htt>
  * intro ht
    change t in
      (sSup ((fun p : TTResult 2 x TTResult 2 =>
        measurementResult p.1 p.2) '' (A x ? B)) : TTResult 2) at ht
    rw [RoundedTheory.mem_sSup] at ht
    obtain <T, <<a, b>, <haA, hbB>, rfl>, htT> := ht
    obtain <zero, hza, one, hob, target, hderives, htt> :=
      (mem_measurementResult a b t).mp htT
    apply (mem_measurementResult
      (sSup A : TTResult 2) (sSup B : TTResult 2) t).2
    refine <zero, ?_, one, ?_, target, hderives, htt>
    * rw [RoundedTheory.mem_sSup]
      exact <a, haA, hza>
    * rw [RoundedTheory.mem_sSup]
      exact <b, hbB, hob>

theorem semanticBind_measureZ_eval_of_ne
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (h : ScottMap (HSemanticValue D_0 j_0) (HSemanticComp D_0 j_0))
  (f : Bool -> HSemanticValue D_0 j_0)
  (hf : f false != f true)
  (coord : Nat)
  (k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)) :

```

Lean 4 source (lines 6801–7200)

```

semanticBind (Q := TTEExternalContinuationPower 2)
  (D_0 := D_0) (j_0 := j_0) h
  (taggedEmbed (Qubit.measureZComp.map f))
  coord k =
  measurementResult
    (semanticBind (Q := TTEExternalContinuationPower 2)

```

```

      (D_0 := D_0) (j_0 := j_0) h
      (semanticUnit (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0) (f false))
      coord k)
    (semanticBind (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0) h
      (semanticUnit (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0) (f true))
      coord k) := by
change
  (TTContinuation.atCoordinate coord
    (TTContinuation.taggedBindScott (n := 2) h
      (taggedEmbed (Qubit.measureZComp.map f)))) k =
    measurementResult _ _
rw [TTContinuation.taggedBind_atCoordinate, TTContinuation.bind_apply]
change
  embed (Qubit.measureZComp.map f)
  (TTContinuation.continuation
    ((TTContinuation.atCoordinate coord).comp h) k) =
    measurementResult _ _
rw [embed_measureZ_map_eq_measurementResult_of_ne f hf]
congr 1

theorem measurementResult_bot_left (B : TTResult 2) :
  measurementResult False B = False := by
  apply le_antisymm
  * intro t ht
    obtain <zero, hzero, _> := (mem_measurementResult False B t).mp ht
    have hbot : (False : TTResult 2) = sSup ({ } : Set (TTResult 2)) :=
      sSup_empty.sym
    rw [hbot, RoundedTheory.mem_sSup] at hzero
    obtain <_, <>, _> := hzero
  * exact bot_le

theorem measurementResult_bot_right (A : TTResult 2) :
  measurementResult A False = False := by
  apply le_antisymm
  * intro t ht
    obtain <_, _, one, hone, _> := (mem_measurementResult A False t).mp ht
    have hbot : (False : TTResult 2) = sSup ({ } : Set (TTResult 2)) :=
      sSup_empty.sym
    rw [hbot, RoundedTheory.mem_sSup] at hone
    obtain <_, <>, _> := hone
  * exact bot_le

theorem measurementResult_le_embed_measureZ_map {D : Type}
  [CompleteLattice D]
  (f : Bool → D) (k : ScottMap D (TTResult 2)) :
  measurementResult (k (f false)) (k (f true)) ≤
    embed (Qubit.measureZComp.map f) k := by
  intro t ht
  obtain <zero, hzero, one, hone, target, hderives, htt> :=
    (mem_measurementResult (k (f false)) (k (f true)) t).mp ht
  apply (TTTokenTheory.mem_aggregateResult
    (Qubit.measureZComp.map f) k t).2
  refine <fun b : Bool => if b then one else zero, ?_, target, ?_, htt>
  * intro o
    cases o
    * exact hzero
    * exact hone
  * exact aggregateDerives_measureZ_map_of_measurement f
    (fun b : Bool => if b then one else zero) target hderives

```

```

/-- Measure-Z under a single closure frame splits into the two payload
children, each of which still carries the function frame and then betas
into an application-free body. The two realized payloads must be
distinct so `measureZ.map` can interpolate the two child instruments
independently. -/
theorem measureZ_under_closure_nil_presentedChannelConfigCompleteness
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} {zeroValue oneValue : C} {x : Name}
  {body : Term (QubitPrimitive C)} {cloEnv : RuntimeEnv C}
  {answer : HSemanticComp D_0 j_0}
  (hc : s.control = .term (.prim (.measureZ zeroValue oneValue)))
  (hs : s.stack = [.function (.closure x body cloEnv)])
  (hnoapp : NoApp body)
  (hscoped : ChannelConfig.WellScoped s)
  (hrel : ChannelConfigRel D_0 j_0 realize s answer)
  (hne : realize zeroValue != realize oneValue) :
  PresentedChannelConfigCompleteness D_0 j_0 realize s answer := by
let sMz : ChannelConfig C :=
  {s with control := .term (.prim (.measureZ zeroValue oneValue))}
have hsMz : sMz = s := ChannelConfig.ext hc.symm rfl rfl rfl
obtain <semanticEnv, kStack, henv, hstack, rfl> :=
  channelConfigRel_term_inv D_0 j_0 hc hrel
rw [hs] at hstack
cases hstack
case function f krest hfn hrest =>
  cases hrest
  let sZero : ChannelConfig C :=
    {s with
      control := .value (.payload zeroValue)
      quantum := applyOperation (measurementOperation false) s.quantum}
  let sOne : ChannelConfig C :=
    {s with
      control := .value (.payload oneValue)
      quantum := applyOperation (measurementOperation true) s.quantum}
  have hscopedZero : ChannelConfig.WellScoped sZero := by
    have hctl := hscoped.left
    rw [hc] at hctl
    exact <<hctl.left, .payload zeroValue>, hscoped.right>
  have hscopedOne : ChannelConfig.WellScoped sOne := by
    have hctl := hscoped.left
    rw [hc] at hctl
    exact <<hctl.left, .payload oneValue>, hscoped.right>
  have hstackFn : StackRel D_0 j_0 realize
    [.function (.closure x body cloEnv)]
    (fun ma =>
      id (semanticBind (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0)
        (semanticUnfold (Q := TTEExternalContinuationPower 2)
          (D_0 := D_0) (j_0 := j_0) f) ma)) :=
    StackRel.function (.closure x body cloEnv) f [] id hfn
    StackRel.nil
  let childK : HSemanticComp D_0 j_0 -> HSemanticComp D_0 j_0 :=
    fun ma =>
      id (semanticBind (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0)
        (semanticUnfold (Q := TTEExternalContinuationPower 2)
          (D_0 := D_0) (j_0 := j_0) f) ma)
  have hrelZero : ChannelConfigRel D_0 j_0 realize sZero
    (childK (semanticUnit (Q := TTEExternalContinuationPower 2)

```

```

      (D_0 := D_0) (j_0 := j_0) (realize zeroValue))) :=
    <semanticUnit (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0) (realize zeroValue),
      childK,
      ControlRel.value _ _ s.env
      (payload_related D_0 j_0 realize zeroValue),
      hs.symm |> hstackFn, rfl>
  have hrelOne : ChannelConfigRel D_0 j_0 realize sOne
    (childK (semanticUnit (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0) (realize oneValue))) :=
    <semanticUnit (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0) (realize oneValue),
      childK,
      ControlRel.value _ _ s.env
      (payload_related D_0 j_0 realize oneValue),
      hs.symm |> hstackFn, rfl>
  have hzero :=
    value_under_closure_nil_presentedChannelConfigCompleteness
      D_0 j_0 realize (s := sZero) (arg := .payload zeroValue)
      (x := x) (body := body) (cloEnv := cloEnv) rfl hs
    hnoapp hscopedZero hrelZero
  have hone :=
    value_under_closure_nil_presentedChannelConfigCompleteness
      D_0 j_0 realize (s := sOne) (arg := .payload oneValue)
      (x := x) (body := body) (cloEnv := cloEnv) rfl hs
    hnoapp hscopedOne hrelOne
  refine
    { related := hrel
      complete :=
        PresentedChannelTreeCompleteness.congr hsMz rfl
        { selected_result_eq_channelTree_sup_presented := ?_ } }
  intro selectors i ? k? hk
  have hzeroEq :=
    hzero.complete.selected_result_eq_channelTree_sup_presented
      selectors i ? k? hk
  have honeEq :=
    hone.complete.selected_result_eq_channelTree_sup_presented
      selectors i ? k? hk
  have hden :
    interp (hardwarePrimitive D_0 j_0 realize)
      (.prim (.measureZ zeroValue oneValue)) semanticEnv =
      taggedEmbed (Qubit.measureZComp.map
        (fun b => if b then realize oneValue else realize zeroValue)) := by
    simp [hardwarePrimitive_measureZ]
  let payload : Bool -> HSemanticValue D_0 j_0 :=
    fun b => if b then realize oneValue else realize zeroValue
  have hzeroCoord :
    semanticBind (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0)
      (semanticUnfold (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0) f)
      (semanticUnit (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0) (realize zeroValue))
      (HardwareAdequacy.encodePath selectors i) k? =
    sSup (channelTreeResults D_0 j_0 realize sZero selectors i
      k?) := by
  simp [childK, id] using
    (selectPath_semanticBind D_0 j_0
      (semanticUnfold (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0) f)
      (semanticUnit (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0) (realize zeroValue))
      selectors i k?).symm.trans hzeroEq

```

```

have honeCoord :
  semanticBind (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0)
    (semanticUnfold (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0) f)
    (semanticUnit (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0) (realize oneValue))
    (HardwareAdequacy.encodePath selectors i) k? =
  sSup (channelTreeResults D_0 j_0 realize sOne selectors i
    k?) := by
  simp [childK, id] using
    (selectPath_semanticBind D_0 j_0
      (semanticUnfold (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0) f)
      (semanticUnit (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0) (realize oneValue))
      selectors i k?).symm.trans honeEq
have hpayload0 : payload false = realize zeroValue := rfl
have hpayload1 : payload true = realize oneValue := rfl
have hpairs_le_wraps :
  sSup ((fun p : TTResult 2 x TTResult 2 =>
    measurementResult p.1 p.2) '')
    (channelTreeResults D_0 j_0 realize sZero selectors i k? x ?
      channelTreeResults D_0 j_0 realize sOne selectors i k?)) <=
  sSup (channelTreeResults D_0 j_0 realize sMz selectors i k?) := by
  apply sSup_le
  rintro T <<r, q>, <hr, hq>, rfl>
  obtain <fuelz, ztree, zR, hzdepth, rfl> := hr
  obtain <fueo, otree, oR, hodepth, rfl> := hq
  apply le_sSup
  refine <max fuelz fueo + 1,
    ChannelTree.measurement ztree otree,
    wrapMeasurementRealization D_0 j_0 realize ztree otree zR oR,
    ?_, ?_>
  * change max ztree.depth otree.depth + 1 <= max fuelz fueo + 1
  omega
  * by_cases havail :
    ResultAvailable (ChannelTree.measurement ztree otree)
      selectors i
  * have <hza, hoa> := havail
  let wrapR :=
    wrapMeasurementRealization D_0 j_0 realize ztree otree zR oR
  let zR' :=
    measurementZeroRealization D_0 j_0 realize ztree otree wrapR
  let oR' :=
    measurementOneRealization D_0 j_0 realize ztree otree wrapR
  rw [restrictedResult_eq_measurement_eq_measurementResult D_0 j_0
    realize ztree otree wrapR selectors i hza hoa ? k? hk,
    <- restrictedResult_eq_of_wellScoped D_0 j_0 realize ztree
      hscopedZero zR zR' selectors i ? k? hk,
    <- restrictedResult_eq_of_wellScoped D_0 j_0 realize otree
      hscopedOne oR oR' selectors i ? k? hk]
  * rw [restrictedResult_eq_bot D_0 j_0 realize
    (ChannelTree.measurement ztree otree)
    (wrapMeasurementRealization D_0 j_0 realize ztree otree zR oR)
    selectors i k? havail]
  by_cases hza : ResultAvailable ztree selectors i
  * by_cases hoa : ResultAvailable otree selectors i
  * exact False.elim (havail <hza, hoa>)
  * change measurementResult
    (restrictedResult D_0 j_0 realize ztree zR selectors i k?)
    (restrictedResult D_0 j_0 realize otree oR selectors i k?) =
    False

```

```

      rw [restrictedResult_eq_bot D_0 j_0 realize otree oR
        selectors i k? hoa, measurementResult_bot_right]
    * change measurementResult
      (restrictedResult D_0 j_0 realize ztree zR selectors i k?)
      (restrictedResult D_0 j_0 realize otree oR selectors i k?) =
      False
    rw [restrictedResult_eq_bot D_0 j_0 realize ztree zR
      selectors i k? hza, measurementResult_bot_left]
  have hwraps_le_pairs :
    sSup (channelTreeResults D_0 j_0 realize sMz selectors i k?) <=
    sSup ((fun p : TTResult 2 x TTResult 2 =>
      measurementResult p.1 p.2) ''
      (channelTreeResults D_0 j_0 realize sZero selectors i k? x ?
        channelTreeResults D_0 j_0 realize sOne selectors i k?)) := by
  rw [hsMz]
  apply sSup_le
  rintro T <_, tree, R, _, rfl>
  cases tree with
  | terminal hterm =>
    cases hterm.control_eq.symm.trans hc
  | internal h next =>
    exact False.elim (ChannelInternalStep.not_measureZ h hc)
  | external _ hex _ =>
    exact False.elim (ChannelExternalStep.not_prim hex hc)
  | probability _ _ _ =>
    cases hc
  | probabilityZero _ =>
    cases hc
  | probabilityOne _ =>
    cases hc
  | @measurement source zv ov ztree otree =>
    injection hc with hterm
    injection hterm with hmeasure
    injection hmeasure with hzv hov
    subst zv
    subst ov
    by_cases havail :
      ResultAvailable (ChannelTree.measurement ztree otree)
      selectors i
    * have <hza, hoa> := havail
    rw [restrictedResult_measurement_eq_measurementResult D_0 j_0
      realize ztree otree R selectors i hza hoa ? k? hk]
    let a :=
      restrictedResult D_0 j_0 realize ztree
      (measurementZeroRealization D_0 j_0 realize ztree otree R)
      selectors i k?
    let b :=
      restrictedResult D_0 j_0 realize otree
      (measurementOneRealization D_0 j_0 realize ztree otree R)
      selectors i k?
    have ha : a in channelTreeResults D_0 j_0 realize sZero
      selectors i k? :=
      <ztree.depth, ztree,
        measurementZeroRealization D_0 j_0 realize ztree otree R,
        le_rfl, rfl>
    have hb : b in channelTreeResults D_0 j_0 realize sOne
      selectors i k? :=
      <otree.depth, otree,
        measurementOneRealization D_0 j_0 realize ztree otree R,
        le_rfl, rfl>
    exact le_sSup <(a, b), <ha, hb>, rfl>
  * rw [restrictedResult_eq_bot D_0 j_0 realize
    (ChannelTree.measurement ztree otree) R selectors i k?

```



```

        havail]
        exact bot_le
simp only [id]
rw [hden, selectPath_semanticBind,
    semanticBind_measureZ_eval_of_ne D_0 j_0
    (semanticUnfold (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0) f)
    payload hne, hpayload0, hpayload1, hzeroCoord, honeCoord,
    measurementResult_sSup]
exact le_antisymm hpairs_le_wraps hwraps_le_pairs

/-- Closed `app (lam x body) (measureZ z o)` with an application-free body
is presented-complete at a normalized start when the realized payloads
are distinct. -/
theorem closed_lam_measureZ_noapp_presented_channelTreeCompleteness {C : Type}
(D_0 : QDomain.{0})
(j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
(realize : C -> HSemanticValue D_0 j_0)
(x : Name) (body : Term (QubitPrimitive C))
(zeroValue oneValue : C)
(hclosed : Closed
    (.app (.lam x body) (.prim (.measureZ zeroValue oneValue)))))
(hnoapp : NoApp body)
(hne : realize zeroValue != realize oneValue)
(quantum : NormalizedDensity 2)
(semanticEnv : Env (HSemanticValue D_0 j_0)) :
PresentedChannelTreeCompleteness D_0 j_0 realize
    (initialChannelConfig
        (.app (.lam x body) (.prim (.measureZ zeroValue oneValue))
            quantum)
        (interp (hardwarePrimitive D_0 j_0 realize)
            (.app (.lam x body) (.prim (.measureZ zeroValue oneValue))
                semanticEnv) := by
let code : Term (QubitPrimitive C) :=
    .app (.lam x body) (.prim (.measureZ zeroValue oneValue))
let s : ChannelConfig C := initialChannelConfig code quantum
have hc : s.control = .term code := rfl
have hrel :=
    initialChannelConfig_related D_0 j_0 realize code quantum semanticEnv
have hscoped :=
    initialChannelConfig_wellScoped hclosed quantum
have hsApp :
    {s with
        control :=
            .term (.app (.lam x body)
                (.prim (.measureZ zeroValue oneValue)))] =
    s :=
    ChannelConfig.ext hc.symm rfl rfl rfl
have hrelApp : ChannelConfigRel D_0 j_0 realize
    {s with
        control :=
            .term (.app (.lam x body)
                (.prim (.measureZ zeroValue oneValue)))]
        (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv) :=
    hsApp.symm |> hrel
have hrelLam :=
    channel_config_application D_0 j_0 (s := s)
    (fn := .lam x body)
    (arg := .prim (.measureZ zeroValue oneValue)) hrelApp
have hrelClo :=
    channel_config_lambda D_0 j_0
    (s :=

```

```

    {s with
      stack :=
        .argument (.prim (.measureZ zeroValue oneValue)) s.env ::
          s.stack})
  hrelLam
have hrelArg :=
  channel_config_evaluateArgument D_0 j_0
  (s :=
    {s with
      control := .value (.closure x body s.env)
      stack :=
        .argument (.prim (.measureZ zeroValue oneValue)) s.env ::
          s.stack})
    (fn := .closure x body s.env)
    (arg := .prim (.measureZ zeroValue oneValue))
    (callEnv := s.env) (rest := s.stack) hrelClo

```

Lean 4 source (lines 7201–7600)

```

let sArg : ChannelConfig C :=
  {s with
    control := .term (.prim (.measureZ zeroValue oneValue))
    stack := .function (.closure x body s.env) :: s.stack}
have hstepApp : ChannelInternalStep s
  {s with
    control := .term (.lam x body)
    stack :=
      .argument (.prim (.measureZ zeroValue oneValue)) s.env ::
        s.stack} := by
  have happ :
    ChannelInternalStep
      {s with
        control :=
          .term (.app (.lam x body)
            (.prim (.measureZ zeroValue oneValue))))}
      {s with
        control := .term (.lam x body)
        stack :=
          .argument (.prim (.measureZ zeroValue oneValue)) s.env ::
            s.stack} :=
    ChannelInternalStep.application (s := s) (fn := .lam x body)
    (arg := .prim (.measureZ zeroValue oneValue))
  exact hsApp.symm |> happ
have hstepLam : ChannelInternalStep
  {s with
    control := .term (.lam x body)
    stack :=
      .argument (.prim (.measureZ zeroValue oneValue)) s.env ::
        s.stack}
  {s with
    control := .value (.closure x body s.env)
    stack :=
      .argument (.prim (.measureZ zeroValue oneValue)) s.env ::
        s.stack} :=
  ChannelInternalStep.lambda
  (s :=
    {s with
      stack :=
        .argument (.prim (.measureZ zeroValue oneValue)) s.env ::
          s.stack})
  (x := x) (body := body)
have hstepArg : ChannelInternalStep
  {s with
    control := .value (.closure x body s.env)

```

```

stack :=
  .argument (.prim (.measureZ zeroValue oneValue)) s.env ::
    s.stack}
sArg :=
ChannelInternalStep.evaluateArgument
(s :=
  {s with
    control := .value (.closure x body s.env)
    stack :=
      .argument (.prim (.measureZ zeroValue oneValue)) s.env ::
        s.stack})
(fn := .closure x body s.env)
(arg := .prim (.measureZ zeroValue oneValue))
(callEnv := s.env) (rest := s.stack)
have hscopedArg : ChannelConfig.WellScoped sArg :=
  ChannelInternalStep.preserve_wellScoped hstepArg
  (ChannelInternalStep.preserve_wellScoped hstepLam
    (ChannelInternalStep.preserve_wellScoped hstepApp hscoped))
have hsArg : sArg.stack = [.function (.closure x body s.env)] := by
  simp [sArg, s, initialChannelConfig, ofConfig, initialConfig]
have harg :
  PresentedChannelConfigCompleteness D_0 j_0 realize sArg
    (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv) :=
measureZ_under_closure_nil_presentedChannelConfigCompleteness
D_0 j_0 realize (s := sArg) (zeroValue := zeroValue)
(oneValue := oneValue) (x := x) (body := body)
(cloEnv := s.env) rfl hsArg hnoapp hscopedArg
(by
  change ChannelConfigRel D_0 j_0 realize
    {s with
      control := .term (.prim (.measureZ zeroValue oneValue))
      env := s.env
      stack := .function (.closure x body s.env) :: s.stack}
    -
    exact hrelArg)
hne
exact (stacked_lam_app_presentedChannelConfigCompleteness D_0 j_0 realize
  (s := s) (x := x) (body := body)
  (arg := .prim (.measureZ zeroValue oneValue))
  hc hrel harg).complete

/-- Token adequacy for closed `app (lam x body) (measureZ z o)` with an
application-free body and distinct realized payloads. -/
theorem closed_lam_measureZ_noapp_presented_token_adequacy {C : Type}
(D_0 : QDomain.{0})
(j_0 : IsContinuousLatticeProjection D_0.carrier
  (QuantumFunctor (QModel (TTEnternalContinuationPower 2)) D_0.carrier))
(realize : C -> HSemanticValue D_0 j_0)
(x : Name) (body : Term (QubitPrimitive C))
(zeroValue oneValue : C)
(hclosed : Closed
  (.app (.lam x body) (.prim (.measureZ zeroValue oneValue)))))
(hnoapp : NoApp body)
(hne : realize zeroValue != realize oneValue)
(quantum : NormalizedDensity 2)
(semanticEnv : Env (HSemanticValue D_0 j_0))
(selectors : List Bool)
(? : HSemanticValue D_0 j_0 -> FiniteInstrumentComp 2 PUnit.{1})
(k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2))
(hk : forall d, k d = (? d).satisfiedTTTheory resultCode)
(i : Nat) (token : TTObservationToken 2) :
token in HardwareAdequacy.selectPath selectors
  (interp (hardwarePrimitive D_0 j_0 realize)

```

```

      (.app (.lam x body) (.prim (.measureZ zeroValue oneValue)))
      semanticEnv) i k <->
exists fuel, exists (tree : ChannelTree C
  (initialChannelConfig
    (.app (.lam x body) (.prim (.measureZ zeroValue oneValue)))
    quantum))
  (R : ChannelTreeRealization D_0 j_0 realize tree),
  tree.depth <= fuel /\
  ResultAvailable tree selectors i /\
  TTObservationToken.Holds resultCode token
  ((restrictedInstrument D_0 j_0 realize tree R selectors i).bind
    ?) :=
presented_channel_tree_token_adequacy_iff D_0 j_0 realize
  (initialChannelConfig
    (.app (.lam x body) (.prim (.measureZ zeroValue oneValue)))
    quantum)
  (interp (hardwarePrimitive D_0 j_0 realize)
    (.app (.lam x body) (.prim (.measureZ zeroValue oneValue)))
    semanticEnv)
  (closed_lam_measureZ_noapp_presented_channelTreeCompleteness
    D_0 j_0 realize x body zeroValue oneValue hclosed hnoapp hne
    quantum semanticEnv)
  selectors ? k hk i token

/-- Closed `app (lam x body) (extern M N)` is presented-complete when the
body is administrative NoApp (so selection does not reindex the
closure) and both external children are administrative NoApp. -/
theorem closed_lam_extern_admin_noapp_presented_channelTreeCompleteness
{C : Type}
(D_0 : QDomain.{0})
(j_0 : IsContinuousLatticeProjection D_0.carrier
  (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
(realize : C -> HSemanticValue D_0 j_0)
(x : Name) (body left right : Term (QubitPrimitive C))
(hclosed : Closed (.app (.lam x body) (.extern left right)))
(hnoapp : NoApp body) (hadminBody : AdminNoApp body)
(hadminL : AdminNoApp left) (hadminR : AdminNoApp right)
(quantum : NormalizedDensity 2)
(semanticEnv : Env (HSemanticValue D_0 j_0)) :
PresentedChannelTreeCompleteness D_0 j_0 realize
  (initialChannelConfig (.app (.lam x body) (.extern left right))
    quantum)
  (interp (hardwarePrimitive D_0 j_0 realize)
    (.app (.lam x body) (.extern left right)) semanticEnv) := by
let code : Term (QubitPrimitive C) :=
  .app (.lam x body) (.extern left right)
let s : ChannelConfig C := initialChannelConfig code quantum
have hc : s.control = .term code := rfl
have hrel :=
  initialChannelConfig_related D_0 j_0 realize code quantum semanticEnv
have hscoped :=
  initialChannelConfig_wellScoped hclosed quantum
have hsApp :
  {s with
    control := .term (.app (.lam x body) (.extern left right))} =
  s :=
  ChannelConfig.ext hc.symm rfl rfl rfl
have hrelApp : ChannelConfigRel D_0 j_0 realize
  {s with
    control := .term (.app (.lam x body) (.extern left right))}
  (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv) :=
  hsApp.symm |> hrel
have hrelLam :=

```

```

channel_config_application D_0 j_0 (s := s)
  (fn := .lam x body) (arg := .extern left right) hrelApp
have hrelClo :=
  channel_config_lambda D_0 j_0
  (s :=
    {s with
      stack := .argument (.extern left right) s.env :: s.stack})
  hrelLam
have hrelArg :=
  channel_config_evaluateArgument D_0 j_0
  (s :=
    {s with
      control := .value (.closure x body s.env)
      stack := .argument (.extern left right) s.env :: s.stack})
  (fn := .closure x body s.env) (arg := .extern left right)
  (callEnv := s.env) (rest := s.stack) hrelClo
let sArg : ChannelConfig C :=
  {s with
    control := .term (.extern left right)
    stack := .function (.closure x body s.env) :: s.stack}
have hstepApp : ChannelInternalStep s
  {s with
    control := .term (.lam x body)
    stack := .argument (.extern left right) s.env :: s.stack} := by
have happ :
  ChannelInternalStep
  {s with
    control :=
      .term (.app (.lam x body) (.extern left right))}
  {s with
    control := .term (.lam x body)
    stack :=
      .argument (.extern left right) s.env :: s.stack} :=
  ChannelInternalStep.application (s := s) (fn := .lam x body)
  (arg := .extern left right)
exact hsApp.symm |> happ
have hstepLam : ChannelInternalStep
  {s with
    control := .term (.lam x body)
    stack := .argument (.extern left right) s.env :: s.stack}
  {s with
    control := .value (.closure x body s.env)
    stack := .argument (.extern left right) s.env :: s.stack} :=
  ChannelInternalStep.lambda
  (s :=
    {s with
      stack := .argument (.extern left right) s.env :: s.stack})
  (x := x) (body := body)
have hstepArg : ChannelInternalStep
  {s with
    control := .value (.closure x body s.env)
    stack := .argument (.extern left right) s.env :: s.stack}
  sArg :=
  ChannelInternalStep.evaluateArgument
  (s :=
    {s with
      control := .value (.closure x body s.env)
      stack := .argument (.extern left right) s.env :: s.stack})
  (fn := .closure x body s.env) (arg := .extern left right)
  (callEnv := s.env) (rest := s.stack)
have hscopedArg : ChannelConfig.WellScoped sArg :=
  ChannelInternalStep.preserve_wellScoped hstepArg
  (ChannelInternalStep.preserve_wellScoped hstepLam

```

```

    (ChannelInternalStep.preserve_wellScoped hstepApp hscoped))
have hsArg : sArg.stack = [.function (.closure x body s.env)] := by
  simp [sArg, s, initialChannelConfig, ofConfig, initialConfig]
have hscopedL : ChannelConfig.WellScoped
  {sArg with control := .term left} :=
  wellScoped_term_child (s := sArg) (code := .extern left right)
  (child := left) rfl hscopedArg fun z hz => by simp [free, hz]
have hscopedR : ChannelConfig.WellScoped
  {sArg with control := .term right} :=
  wellScoped_term_child (s := sArg) (code := .extern left right)
  (child := right) rfl hscopedArg fun z hz => by simp [free, hz]
have harg :
  PresentedChannelConfigCompleteness D_0 j_0 realize sArg
  (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv) :=
  extern_under_closure_nil_presentedChannelConfigCompleteness
  D_0 j_0 realize (s := sArg) (left := left) (right := right)
  (x := x) (body := body) (cloEnv := s.env) rfl hsArg hadminBody
  (by
    change ChannelConfigRel D_0 j_0 realize
    {s with
      control := .term (.extern left right)
      env := s.env
      stack := .function (.closure x body s.env) :: s.stack}
    -
    exact hrelArg)
  (fun childEnv childK henv hstack =>
    admin_noapp_under_closure_nil_presentedChannelConfigCompleteness
    D_0 j_0 realize (s := {sArg with control := .term left})
    (code := left) (x := x) (body := body) (cloEnv := s.env)
    hadminL rfl hsArg hnoapp hscopedL
    <interp (hardwarePrimitive D_0 j_0 realize) left childEnv,
      childK, ControlRel.term left sArg.env childEnv henv,
      hstack, rfl>)
  (fun childEnv childK henv hstack =>
    admin_noapp_under_closure_nil_presentedChannelConfigCompleteness
    D_0 j_0 realize (s := {sArg with control := .term right})
    (code := right) (x := x) (body := body) (cloEnv := s.env)
    hadminR rfl hsArg hnoapp hscopedR
    <interp (hardwarePrimitive D_0 j_0 realize) right childEnv,
      childK, ControlRel.term right sArg.env childEnv henv,
      hstack, rfl>)
exact (stacked_lam_app_presentedChannelConfigCompleteness D_0 j_0 realize
  (s := s) (x := x) (body := body) (arg := .extern left right)
  hc hrel harg).complete

/-- Token adequacy for closed `app (lam x body) (extern M N)` with an
administrative NoApp body and administrative NoApp children. -/
theorem closed_lam_extern_admin_noapp_presented_token_adequacy {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (x : Name) (body left right : Term (QubitPrimitive C))
  (hclosed : Closed (.app (.lam x body) (.extern left right)))
  (hnoapp : NoApp body) (hadminBody : AdminNoApp body)
  (hadminL : AdminNoApp left) (hadminR : AdminNoApp right)
  (quantum : NormalizedDensity 2)
  (semanticEnv : Env (HSemanticValue D_0 j_0))
  (selectors : List Bool)
  (? : HSemanticValue D_0 j_0 -> FiniteInstrumentComp 2 PUnit.{1})
  (k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2))
  (hk : forall d, k d = (? d).satisfiedTTTheory resultCode)
  (i : Nat) (token : TTObservationToken 2) :

```

```

token in HardwareAdequacy.selectPath selectors
  (interp (hardwarePrimitive D_0 j_0 realize)
    (.app (.lam x body) (.extern left right)) semanticEnv) i k <->
exists fuel, exists (tree : ChannelTree C
  (initialChannelConfig
    (.app (.lam x body) (.extern left right)) quantum))
(R : ChannelTreeRealization D_0 j_0 realize tree),
tree.depth <= fuel /\
ResultAvailable tree selectors i /\
TTObservationToken.Holds resultCode token
  ((restrictedInstrument D_0 j_0 realize tree R selectors i).bind
    ?) :=
presented_channel_tree_token_adequacy_iff D_0 j_0 realize
  (initialChannelConfig (.app (.lam x body) (.extern left right))
    quantum)
(interp (hardwarePrimitive D_0 j_0 realize)
  (.app (.lam x body) (.extern left right)) semanticEnv)
(closed_lam_extern_admin_noapp_presented_channelTreeCompleteness
  D_0 j_0 realize x body left right hclosed hnoapp hadminBody
  hadminL hadminR quantum semanticEnv)
selectors ? k hk i token

theorem applyContinuation_lambda_admin_coordinateConstant {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (x : Name) (body arg : Term (QubitPrimitive C))
  (hadminBody : AdminNoApp body) (hadminArg : AdminNoApp arg)
  (? cloEnv : Env (HSemanticValue D_0 j_0)) :
CoordinateConstant
  (applyContinuation (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0)
    (interp (hardwarePrimitive D_0 j_0 realize) arg) ?
    (lambdaValue (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0) x
      (interp (hardwarePrimitive D_0 j_0 realize) body) cloEnv)) := by
intro i j
let h : ScottMap (HSemanticValue D_0 j_0) (HSemanticComp D_0 j_0) :=
  semanticUnfold (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0)
    (lambdaValue (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0) x
      (interp (hardwarePrimitive D_0 j_0 realize) body) cloEnv)
have hbody :
  forall d, CoordinateConstant
    (interp (hardwarePrimitive D_0 j_0 realize) body
      (envUpdate (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0) x (cloEnv, d))) :=
  fun d =>
    adminNoApp_interp_coordinateConstant D_0 j_0 realize hadminBody
      (envUpdate (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0) x (cloEnv, d))
have harg :
  CoordinateConstant
    (interp (hardwarePrimitive D_0 j_0 realize) arg ?) :=
  adminNoApp_interp_coordinateConstant D_0 j_0 realize hadminArg ?
rw [applyContinuation_apply]
change
  TTContinuation.bind ((TTContinuation.atCoordinate i).comp h)
    (interp (hardwarePrimitive D_0 j_0 realize) arg ? i) =
  TTContinuation.bind ((TTContinuation.atCoordinate j).comp h)
    (interp (hardwarePrimitive D_0 j_0 realize) arg ? j)

```

```

have hh :
  (TTContinuation.atCoordinate i).comp h =
    (TTContinuation.atCoordinate j).comp h := by
  apply ScottMap.ext
  intro d
  change h d i = h d j
  rw [semanticUnfold_lambdaValue]
  exact hbody d i j
  rw [hh, harg i j]

/-- A lambda under a single argument frame evaluates the argument under
the resulting closure. -/
theorem lam_under_argument_nil_admin_noapp_presentedChannelConfigCompleteness
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} {x : Name}
  {body arg : Term (QubitPrimitive C)}
  {answer : HSemanticComp D_0 j_0}
  (hc : s.control = .term (.lam x body))
  (hs : s.stack = [.argument arg s.env])
  (hnoapp : NoApp body) (hadminArg : AdminNoApp arg)
  (hscoped : ChannelConfig.WellScoped s)
  (hrel : ChannelConfigRel D_0 j_0 realize s answer) :
  PresentedChannelConfigCompleteness D_0 j_0 realize s answer := by
have hslam :
  {s with control := .term (.lam x body)} = s :=
  ChannelConfig.ext hc.symm rfl rfl rfl
have hrelLam : ChannelConfigRel D_0 j_0 realize
  {s with control := .term (.lam x body)} answer :=
  hslam.symm |> hrel
have hrelClo :=
  channel_config_lambda D_0 j_0 (s := s) hrelLam
have hsrcClo :
  {s with control := .value (.closure x body s.env)} =
  {s with
    control := .value (.closure x body s.env)
    stack := .argument arg s.env :: []} :=

```

Lean 4 source (lines 7601–8000)

```

  ChannelConfig.ext rfl rfl hs rfl
have hrelFn :=
  channel_config_evaluateArgument D_0 j_0
  (s := {s with control := .value (.closure x body s.env)})
  (fn := .closure x body s.env) (arg := arg)
  (callEnv := s.env) (rest := [])
  (hsrcClo |> hrelClo)
have hstepLam : ChannelInternalStep s
  {s with control := .value (.closure x body s.env)} := by
  have happ :
    ChannelInternalStep
    {s with control := .term (.lam x body)}
    {s with control := .value (.closure x body s.env)} :=
    ChannelInternalStep.lambda (s := s) (x := x) (body := body)
  exact hslam.symm |> happ
have hstepArg : ChannelInternalStep
  {s with control := .value (.closure x body s.env)}
  {s with
    control := .term arg
    env := s.env
    stack := .function (.closure x body s.env) :: []} := by

```



```

have happ :
  ChannelInternalStep
  {s with
    control := .value (.closure x body s.env)
    stack := .argument arg s.env :: []}
  {s with
    control := .term arg
    env := s.env
    stack := .function (.closure x body s.env) :: []} :=
  ChannelInternalStep.evaluateArgument
  (s := {s with control := .value (.closure x body s.env)})
  (fn := .closure x body s.env) (arg := arg)
  (callEnv := s.env) (rest := [])
exact hsrcClo.symm |> happ
have hscopedFn : ChannelConfig.WellScoped
  {s with
    control := .term arg
    env := s.env
    stack := .function (.closure x body s.env) :: []} :=
  ChannelInternalStep.preserve_wellScoped hstepArg
  (ChannelInternalStep.preserve_wellScoped hstepLam hscoped)
have harg :
  PresentedChannelConfigCompleteness D_0 j_0 realize
  {s with
    control := .term arg
    env := s.env
    stack := .function (.closure x body s.env) :: []}
  answer :=
  admin_noapp_under_closure_nil_presentedChannelConfigCompleteness
  D_0 j_0 realize
  (s :=
    {s with
      control := .term arg
      env := s.env
      stack := .function (.closure x body s.env) :: []})
  (code := arg) (x := x) (body := body) (cloEnv := s.env)
  hadminArg rfl rfl hnoapp hscopedFn hrelFn
have hClo :=
  evaluateArgument_presentedChannelConfigCompleteness D_0 j_0 realize
  (s := {s with control := .value (.closure x body s.env)})
  (fn := .closure x body s.env) (arg := arg)
  (callEnv := s.env) (rest := []) rfl hs hrelClo harg
exact lambda_presentedChannelConfigCompleteness D_0 j_0 realize
  hc hrel hClo

/-- Extern of two lambdas under a single argument frame. The argument
and both lambda bodies must be administrative NoApp so apply-continuation
is coordinate-constant at the two lambda values. -/
theorem extern_lams_under_argument_nil_presentedChannelConfigCompleteness
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} {xL xR : Name}
  {bodyL bodyR arg : Term (QubitPrimitive C)}
  {answer : HSemanticComp D_0 j_0}
  (hc : s.control =
    .term (.extern (.lam xL bodyL) (.lam xR bodyR)))
  (hs : s.stack = [.argument arg s.env])
  (hnoappL : NoApp bodyL) (hnoappR : NoApp bodyR)
  (hadminL : AdminNoApp bodyL) (hadminR : AdminNoApp bodyR)
  (hadminArg : AdminNoApp arg)

```

```

(hscoped : ChannelConfig.WellScoped s)
(hrel : ChannelConfigRel D_0 j_0 realize s answer) :
PresentedChannelConfigCompleteness D_0 j_0 realize s answer := by
have hscopedL : ChannelConfig.WellScoped
  {s with control := .term (.lam xL bodyL)} :=
  wellScoped_term_child (s := s)
  (code := .extern (.lam xL bodyL) (.lam xR bodyR))
  (child := .lam xL bodyL) hc hscoped
  fun z hz => List.mem_append.mpr (Or.inl hz)
have hscopedR : ChannelConfig.WellScoped
  {s with control := .term (.lam xR bodyR)} :=
  wellScoped_term_child (s := s)
  (code := .extern (.lam xL bodyL) (.lam xR bodyR))
  (child := .lam xR bodyR) hc hscoped
  fun z hz => List.mem_append.mpr (Or.inr hz)
refine extern_related_presentedChannelConfigCompleteness
  D_0 j_0 realize hc hrel ?_ ?_ ?_
* intro semanticEnv k henv hstack selected
rw [hs] at hstack
cases hstack
case argument semanticEnv' krest henvArg hrest =>
  cases hrest
  simp only [id]
  have hL :=
    applyContinuation_lambda_admin_coordinateConstant D_0 j_0 realize
      xL bodyL arg hadminL hadminArg semanticEnv' semanticEnv
  have hR :=
    applyContinuation_lambda_admin_coordinateConstant D_0 j_0 realize
      xR bodyR arg hadminR hadminArg semanticEnv' semanticEnv
  have hden :
    interp (hardwarePrimitive D_0 j_0 realize)
      (.extern (.lam xL bodyL) (.lam xR bodyR)) semanticEnv =
    HasComputationChoice.extern
      (semanticUnit (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0)
        (lambdaValue (Q := TTEExternalContinuationPower 2)
          (D_0 := D_0) (j_0 := j_0) xL
          (interp (hardwarePrimitive D_0 j_0 realize) bodyL)
          semanticEnv),
        semanticUnit (Q := TTEExternalContinuationPower 2)
          (D_0 := D_0) (j_0 := j_0)
          (lambdaValue (Q := TTEExternalContinuationPower 2)
            (D_0 := D_0) (j_0 := j_0) xR
            (interp (hardwarePrimitive D_0 j_0 realize) bodyR)
            semanticEnv)) := by
      simp [interp_extern_apply, interp_lam_apply]
  rw [hden]
exact TTContinuation.selectBranch_taggedBind_extern_units
  (applyContinuation (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0)
    (interp (hardwarePrimitive D_0 j_0 realize) arg) semanticEnv')
  (lambdaValue (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0) xL
    (interp (hardwarePrimitive D_0 j_0 realize) bodyL) semanticEnv)
  (lambdaValue (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0) xR
    (interp (hardwarePrimitive D_0 j_0 realize) bodyR) semanticEnv)
  hL hR selected
* intro semanticEnv k henv hstack
exact lam_under_argument_nil_admin_noapp_presentedChannelConfigCompleteness
  D_0 j_0 realize (s := {s with control := .term (.lam xL bodyL)})
  rfl (by simp [hs]) hnoappl hadminArg hscopedL
<interp (hardwarePrimitive D_0 j_0 realize) (.lam xL bodyL)

```

```

      semanticEnv,
      k, ControlRel.term _ s.env semanticEnv henv, hstack, rfl>
* intro semanticEnv k henv hstack
  exact lam_under_argument_nil_admin_noapp_presentedChannelConfigCompleteness
    D_0 j_0 realize (s := {s with control := .term (.lam xR bodyR)})
    rfl (by simp [hs]) hnoappR hadminArg hscopedR
    <interp (hardwarePrimitive D_0 j_0 realize) (.lam xR bodyR)
      semanticEnv,
      k, ControlRel.term _ s.env semanticEnv henv, hstack, rfl>

/-- Closed `app (extern (lam x bodyL) (lam y bodyR)) arg` is
presented-complete when the argument and both bodies are administrative
NoApp. -/
theorem closed_app_extern_lams_admin_noapp_presented_channelTreeCompleteness
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (xL xR : Name) (bodyL bodyR arg : Term (QubitPrimitive C))
  (hclosed : Closed
    (.app (.extern (.lam xL bodyL) (.lam xR bodyR)) arg))
  (hnoappL : NoApp bodyL) (hnoappR : NoApp bodyR)
  (hadminL : AdminNoApp bodyL) (hadminR : AdminNoApp bodyR)
  (hadminArg : AdminNoApp arg)
  (quantum : NormalizedDensity 2)
  (semanticEnv : Env (HSemanticValue D_0 j_0)) :
  PresentedChannelTreeCompleteness D_0 j_0 realize
    (initialChannelConfig
      (.app (.extern (.lam xL bodyL) (.lam xR bodyR)) arg) quantum)
    (interp (hardwarePrimitive D_0 j_0 realize)
      (.app (.extern (.lam xL bodyL) (.lam xR bodyR)) arg)
      semanticEnv) := by
  let code : Term (QubitPrimitive C) :=
    .app (.extern (.lam xL bodyL) (.lam xR bodyR)) arg
  let s : ChannelConfig C := initialChannelConfig code quantum
  have hc : s.control = .term code := rfl
  have hrel :=
    initialChannelConfig_related D_0 j_0 realize code quantum semanticEnv
  have hscoped :=
    initialChannelConfig_wellScoped hclosed quantum
  have hsApp :
    {s with control := .term code} = s :=
    ChannelConfig.ext hc.symm rfl rfl rfl
  have hrelApp : ChannelConfigRel D_0 j_0 realize
    {s with control := .term code}
    (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv) :=
    hsApp.symm |> hrel
  have hrelExt :=
    channel_config_application D_0 j_0 (s := s)
    (fn := .extern (.lam xL bodyL) (.lam xR bodyR)) (arg := arg)
    hrelApp
  have hstepApp : ChannelInternalStep s
    {s with
      control := .term (.extern (.lam xL bodyL) (.lam xR bodyR))
      stack := .argument arg s.env :: s.stack} := by
  have happ :
    ChannelInternalStep
      {s with control := .term code}
      {s with
        control :=
          .term (.extern (.lam xL bodyL) (.lam xR bodyR))
        stack := .argument arg s.env :: s.stack} :=

```

```

    ChannelInternalStep.application (s := s)
    (fn := .extern (.lam xL bodyL) (.lam xR bodyR)) (arg := arg)
exact hsApp.symm |> happ
have hscopedExt : ChannelConfig.WellScoped
  {s with
    control := .term (.extern (.lam xL bodyL) (.lam xR bodyR))
    stack := .argument arg s.env :: s.stack} :=
  ChannelInternalStep.preserve_wellScoped hstepApp hscoped
have hsExt :
  ({s with
    control := .term (.extern (.lam xL bodyL) (.lam xR bodyR))
    stack := .argument arg s.env :: s.stack}).stack =
  [.argument arg s.env] := by
  simp [s, initialChannelConfig, ofConfig, initialConfig]
have hext :
  PresentedChannelConfigCompleteness D_0 j_0 realize
  {s with
    control := .term (.extern (.lam xL bodyL) (.lam xR bodyR))
    stack := .argument arg s.env :: s.stack}
  (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv) :=
  extern_lams_under_argument_nil_presentedChannelConfigCompleteness
  D_0 j_0 realize
  (s :=
    {s with
      control := .term (.extern (.lam xL bodyL) (.lam xR bodyR))
      stack := .argument arg s.env :: s.stack})
  rfl hsExt hnoappL hnoappR hadminL hadminR hadminArg
  hscopedExt hrelExt
exact (application_presentedChannelConfigCompleteness D_0 j_0 realize
  (s := s)
  (fn := .extern (.lam xL bodyL) (.lam xR bodyR)) (arg := arg)
  hc hrel hext).complete

/-- Token adequacy for closed `app (extern (lam x bodyL) (lam y bodyR)) arg`
with administrative NoApp argument and bodies. -/
theorem closed_app_extern_lams_admin_noapp_presented_token_adequacy
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (xL xR : Name) (bodyL bodyR arg : Term (QubitPrimitive C))
  (hclosed : Closed
    (.app (.extern (.lam xL bodyL) (.lam xR bodyR)) arg))
  (hnoappL : NoApp bodyL) (hnoappR : NoApp bodyR)
  (hadminL : AdminNoApp bodyL) (hadminR : AdminNoApp bodyR)
  (hadminArg : AdminNoApp arg)
  (quantum : NormalizedDensity 2)
  (semanticEnv : Env (HSemanticValue D_0 j_0))
  (selectors : List Bool)
  (? : HSemanticValue D_0 j_0 -> FiniteInstrumentComp 2 PUnit.{1})
  (k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2))
  (hk : forall d, k d = (? d).satisfiedTTTheory resultCode)
  (i : Nat) (token : TTObservationToken 2) :
  token in HardwareAdequacy.selectPath selectors
    (interp (hardwarePrimitive D_0 j_0 realize)
      (.app (.extern (.lam xL bodyL) (.lam xR bodyR)) arg)
      semanticEnv) i k <->
  exists fuel, exists (tree : ChannelTree C
    (initialChannelConfig
      (.app (.extern (.lam xL bodyL) (.lam xR bodyR)) arg)
      quantum))
    (R : ChannelTreeRealization D_0 j_0 realize tree),

```

```

    tree.depth <= fuel /\
    ResultAvailable tree selectors i /\
    TTObservationToken.Holds resultCode token
    ((restrictedInstrument D_0 j_0 realize tree R selectors i).bind
     ?) :=
presented_channel_tree_token_adequacy_iff D_0 j_0 realize
  (initialChannelConfig
   (.app (.extern (.lam xL bodyL) (.lam xR bodyR)) arg) quantum)
  (interp (hardwarePrimitive D_0 j_0 realize)
   (.app (.extern (.lam xL bodyL) (.lam xR bodyR)) arg) semanticEnv)
  (closed_app_extern_lams_admin_noapp_presented_channelTreeCompleteness
   D_0 j_0 realize xL xR bodyL bodyR arg hclosed hnoappL hnoappR
   hadminL hadminR hadminArg quantum semanticEnv)
  selectors ? k hk i token

/-- Closed `app (lam x body) (prob p M N)` is presented-complete when
the body is application-free and both probabilistic children are
administrative NoApp. -/
theorem closed_lam_prob_admin_noapp_presented_channelTreeCompleteness
{C : Type}
(D_0 : QDomain.{0})
(j_0 : IsContinuousLatticeProjection D_0.carrier
 (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
(realize : C -> HSemanticValue D_0 j_0)
(x : Name) (body : Term (QubitPrimitive C)) (p : ?)
(left right : Term (QubitPrimitive C))
(hclosed : Closed (.app (.lam x body) (.prob p left right)))
(hnoapp : NoApp body)
(hadminL : AdminNoApp left) (hadminR : AdminNoApp right)
(quantum : NormalizedDensity 2)
(semanticEnv : Env (HSemanticValue D_0 j_0)) :
PresentedChannelTreeCompleteness D_0 j_0 realize
  (initialChannelConfig (.app (.lam x body) (.prob p left right))
   quantum)
  (interp (hardwarePrimitive D_0 j_0 realize)
   (.app (.lam x body) (.prob p left right)) semanticEnv) :=
closed_lam_admin_noapp_presented_channelTreeCompleteness
  D_0 j_0 realize x body (.prob p left right) hclosed hnoapp
  <hadminL, hadminR> quantum semanticEnv

/-- Token adequacy for closed `app (lam x body) (prob p M N)` with an
application-free body and administrative NoApp children. -/
theorem closed_lam_prob_admin_noapp_presented_token_adequacy
{C : Type}
(D_0 : QDomain.{0})
(j_0 : IsContinuousLatticeProjection D_0.carrier
 (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
(realize : C -> HSemanticValue D_0 j_0)
(x : Name) (body : Term (QubitPrimitive C)) (p : ?)
(left right : Term (QubitPrimitive C))
(hclosed : Closed (.app (.lam x body) (.prob p left right)))
(hnoapp : NoApp body)
(hadminL : AdminNoApp left) (hadminR : AdminNoApp right)
(quantum : NormalizedDensity 2)
(semanticEnv : Env (HSemanticValue D_0 j_0))
(selectors : List Bool)
(? : HSemanticValue D_0 j_0 -> FiniteInstrumentComp 2 PUnit.{1})
(k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2))
(hk : forall d, k d = (? d).satisfiedTTTheory resultCode)
(i : Nat) (token : TTObservationToken 2) :
token in HardwareAdequacy.selectPath selectors
  (interp (hardwarePrimitive D_0 j_0 realize)
   (.app (.lam x body) (.prob p left right)) semanticEnv) i k <->

```

```

exists fuel, exists (tree : ChannelTree C
  (initialChannelConfig
    (.app (.lam x body) (.prob p left right)) quantum))
(R : ChannelTreeRealization D_0 j_0 realize tree),
tree.depth <= fuel /\
ResultAvailable tree selectors i /\
TTObservationToken.Holds resultCode token
  ((restrictedInstrument D_0 j_0 realize tree R selectors i).bind
    ?) :=
presented_channel_tree_token_adequacy_iff D_0 j_0 realize
  (initialChannelConfig (.app (.lam x body) (.prob p left right))
    quantum)
(interp (hardwarePrimitive D_0 j_0 realize)
  (.app (.lam x body) (.prob p left right)) semanticEnv)
(closed_lam_prob_admin_noapp_presented_channelTreeCompleteness
  D_0 j_0 realize x body p left right hclosed hnoapp hadminL hadminR
  quantum semanticEnv)
selectors ? k hk i token

/-- Closed `app (recLam self x body) arg` is presented-complete when the
body is application-free and the argument is administrative NoApp. -/
theorem closed_recLam_admin_noapp_presented_channelTreeCompleteness
{C : Type}
(D_0 : QDomain.{0})
(j_0 : IsContinuousLatticeProjection D_0.carrier
  (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
(realize : C -> HSemanticValue D_0 j_0)
(self x : Name) (body arg : Term (QubitPrimitive C))
(hclosed : Closed (.app (.recLam self x body) arg))
(hnoapp : NoApp body) (hadmin : AdminNoApp arg)
(quantum : NormalizedDensity 2)
(semanticEnv : Env (HSemanticValue D_0 j_0)) :
PresentedChannelTreeCompleteness D_0 j_0 realize
  (initialChannelConfig (.app (.recLam self x body) arg) quantum)
  (interp (hardwarePrimitive D_0 j_0 realize)
    (.app (.recLam self x body) arg) semanticEnv) := by
let code : Term (QubitPrimitive C) := .app (.recLam self x body) arg
let s : ChannelConfig C := initialChannelConfig code quantum
have hc : s.control = .term code := rfl
have hrel :=
  initialChannelConfig_related D_0 j_0 realize code quantum semanticEnv
have hscoped :=
  initialChannelConfig_wellScoped hclosed quantum
have hsApp :
  {s with control := .term (.app (.recLam self x body) arg)} = s :=
  ChannelConfig.ext hc.symm rfl rfl rfl
have hrelApp : ChannelConfigRel D_0 j_0 realize
  {s with control := .term (.app (.recLam self x body) arg)}
  (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv) :=
  hsApp.symm |> hrel
have hrelRec :=
  channel_config_application D_0 j_0 (s := s)
  (fn := .recLam self x body) (arg := arg) hrelApp
have hrelClo :=
  channel_config_recursive D_0 j_0
  (s := {s with stack := .argument arg s.env :: s.stack})
  hrelRec
have hrelArg :=
  channel_config_evaluateArgument D_0 j_0
  (s :=
    {s with
      control := .value (.recClosure self x body s.env)
      stack := .argument arg s.env :: s.stack})

```

```
(fn := .recClosure self x body s.env) (arg := arg)
```

Lean 4 source (lines 8001–8400)

```
(callEnv := s.env) (rest := s.stack) hrelClo
let sArg : ChannelConfig C :=
  {s with
    control := .term arg
    stack := .function (.recClosure self x body s.env) :: s.stack}
have hstepApp : ChannelInternalStep s
  {s with
    control := .term (.recLam self x body)
    stack := .argument arg s.env :: s.stack} := by
  have happ :
    ChannelInternalStep
      {s with control := .term (.app (.recLam self x body) arg)}
      {s with
        control := .term (.recLam self x body)
        stack := .argument arg s.env :: s.stack} :=
    ChannelInternalStep.application (s := s)
    (fn := .recLam self x body) (arg := arg)
  exact hsApp.symm |> happ
have hstepRec : ChannelInternalStep
  {s with
    control := .term (.recLam self x body)
    stack := .argument arg s.env :: s.stack}
  {s with
    control := .value (.recClosure self x body s.env)
    stack := .argument arg s.env :: s.stack} :=
  ChannelInternalStep.recursive
  (s := {s with stack := .argument arg s.env :: s.stack})
  (self := self) (arg := x) (body := body)
have hstepArg : ChannelInternalStep
  {s with
    control := .value (.recClosure self x body s.env)
    stack := .argument arg s.env :: s.stack}
  sArg :=
  ChannelInternalStep.evaluateArgument
  (s :=
    {s with
      control := .value (.recClosure self x body s.env)
      stack := .argument arg s.env :: s.stack})
  (fn := .recClosure self x body s.env) (arg := arg)
  (callEnv := s.env) (rest := s.stack)
have hscopedArg : ChannelConfig.WellScoped sArg :=
  ChannelInternalStep.preserve_wellScoped hstepArg
  (ChannelInternalStep.preserve_wellScoped hstepRec
    (ChannelInternalStep.preserve_wellScoped hstepApp hscoped))
have hsArg :
  sArg.stack = [.function (.recClosure self x body s.env)] := by
  simp [sArg, s, initialChannelConfig, ofConfig, initialConfig]
have harg :
  PresentedChannelConfigCompleteness D_0 j_0 realize sArg
  (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv) :=
  admin_noapp_under_recClosure_nil_presentedChannelConfigCompleteness
  D_0 j_0 realize (s := sArg) (code := arg) (self := self) (x := x)
  (body := body) (cloEnv := s.env) hadmin rfl hsArg hnoapp
  hscopedArg
  (by
    change ChannelConfigRel D_0 j_0 realize
    {s with
      control := .term arg
      env := s.env
      stack :=
```

```

        .function (.recClosure self x body s.env) :: s.stack}

    exact hrelArg)
exact (stacked_recLam_app_presentedChannelConfigCompleteness
  D_0 j_0 realize (s := s) (self := self) (x := x) (body := body)
  (arg := arg) hc hrel harg).complete

/-- Token adequacy for closed `app (recLam self x body) arg` with an
application-free body and an administrative NoApp argument. -/
theorem closed_recLam_admin_noapp_presented_token_adequacy
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (self x : Name) (body arg : Term (QubitPrimitive C))
  (hclosed : Closed (.app (.recLam self x body) arg))
  (hnoapp : NoApp body) (hadmin : AdminNoApp arg)
  (quantum : NormalizedDensity 2)
  (semanticEnv : Env (HSemanticValue D_0 j_0))
  (selectors : List Bool)
  (? : HSemanticValue D_0 j_0 -> FiniteInstrumentComp 2 PUnit.{1})
  (k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2))
  (hk : forall d, k d = (? d).satisfiedTTTheory resultCode)
  (i : Nat) (token : TTObservationToken 2) :
  token in HardwareAdequacy.selectPath selectors
    (interp (hardwarePrimitive D_0 j_0 realize)
      (.app (.recLam self x body) arg) semanticEnv) i k <->
  exists fuel, exists (tree : ChannelTree C
    (initialChannelConfig
      (.app (.recLam self x body) arg) quantum))
    (R : ChannelTreeRealization D_0 j_0 realize tree),
  tree.depth <= fuel /\
  ResultAvailable tree selectors i /\
  TTObservationToken.Holds resultCode token
    ((restrictedInstrument D_0 j_0 realize tree R selectors i).bind
      ?) :=
presented_channel_tree_token_adequacy_iff D_0 j_0 realize
  (initialChannelConfig (.app (.recLam self x body) arg) quantum)
  (interp (hardwarePrimitive D_0 j_0 realize)
    (.app (.recLam self x body) arg) semanticEnv)
  (closed_recLam_admin_noapp_presented_channelTreeCompleteness
    D_0 j_0 realize self x body arg hclosed hnoapp hadmin quantum
    semanticEnv)
  selectors ? k hk i token

/-- A value under two closure frames betas the inner closure, then the
administrative inner body under the remaining outer frame. -/
theorem value_under_two_closures_nil_presentedChannelConfigCompleteness
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} {arg : RuntimeValue C}
  {y x : Name} {bodyY bodyX : Term (QubitPrimitive C)}
  {cloY cloX : RuntimeEnv C} {answer : HSemanticComp D_0 j_0}
  (hc : s.control = .value arg)
  (hs : s.stack =
    [.function (.closure y bodyY cloY),
     .function (.closure x bodyX cloX)])
  (hadminY : AdminNoApp bodyY) (hnoappX : NoApp bodyX)
  (hscoped : ChannelConfig.WellScoped s)

```



```

(hrel : ChannelConfigRel D_0 j_0 realize s answer) :
PresentedChannelConfigCompleteness D_0 j_0 realize s answer := by
have hse :
  {s with
    control := .value arg
    stack :=
      .function (.closure y bodyY cloY) ::
        [.function (.closure x bodyX cloX)]} = s :=
ChannelConfig.ext hc.symm rfl hs.symm rfl
have hrel' : ChannelConfigRel D_0 j_0 realize
  {s with
    control := .value arg
    stack :=
      .function (.closure y bodyY cloY) ::
        [.function (.closure x bodyX cloX)]}
  answer :=
  hse.symm |> hrel
have hrelBody :=
  channel_config_beta D_0 j_0 (s := s) (x := y) (body := bodyY)
  (closureEnv := cloY) (arg := arg)
  (rest := [.function (.closure x bodyX cloX)]) hrel'
let sBody : ChannelConfig C :=
  {s with
    control := .term bodyY
    env := RuntimeEnv.bind y arg cloY
    stack := [.function (.closure x bodyX cloX)]}
have hstepBeta : ChannelInternalStep s sBody := by
  have happ :
    ChannelInternalStep
      {s with
        control := .value arg
        stack :=
          .function (.closure y bodyY cloY) ::
            [.function (.closure x bodyX cloX)]}
      sBody :=
    ChannelInternalStep.beta (s := s) (x := y) (body := bodyY)
    (closureEnv := cloY) (arg := arg)
    (rest := [.function (.closure x bodyX cloX)])
  exact hse.symm |> happ
have hscopedBody : ChannelConfig.WellScoped sBody :=
  ChannelInternalStep.preserve_wellScoped hstepBeta hscoped
have hchild :=
  admin_noapp_under_closure_nil_presentedChannelConfigCompleteness
  D_0 j_0 realize (s := sBody) (code := bodyY) (x := x)
  (body := bodyX) (cloEnv := cloX) hadminY rfl rfl hnoappX
  hscopedBody hrelBody
exact beta_presentedChannelConfigCompleteness D_0 j_0 realize
  (s := s) (x := y) (body := bodyY) (closureEnv := cloY)
  (arg := arg) (rest := [.function (.closure x bodyX cloX)])
  hc hs hrel hchild

theorem ret_under_two_closures_nil_presentedChannelConfigCompleteness
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} {value : C}
  {y x : Name} {bodyY bodyX : Term (QubitPrimitive C)}
  {cloY cloX : RuntimeEnv C} {answer : HSemanticComp D_0 j_0}
  (hc : s.control = .term (.prim (.ret value)))
  (hs : s.stack =
    [.function (.closure y bodyY cloY),

```

```

      .function (.closure x bodyX cloX)])
(hadminY : AdminNoApp bodyY) (hnoappX : NoApp bodyX)
(hscoped : ChannelConfig.WellScoped s)
(hrel : ChannelConfigRel D_0 j_0 realize s answer) :
PresentedChannelConfigCompleteness D_0 j_0 realize s answer := by
have hsRet :
  {s with control := .term (.prim (.ret value))} = s :=
  ChannelConfig.ext hc.symm rfl rfl rfl
have hrelRet : ChannelConfigRel D_0 j_0 realize
  {s with control := .term (.prim (.ret value))} answer :=
  hsRet.symm |> hrel
have hrelVal :=
  channel_config_return D_0 j_0 hrelRet
have hstepRet : ChannelInternalStep s
  {s with control := .value (.payload value)} := by
  have happ :
    ChannelInternalStep
    {s with control := .term (.prim (.ret value))}
    {s with control := .value (.payload value)} :=
    ChannelInternalStep.returnPrimitive (s := s) (value := value)
  exact hsRet.symm |> happ
have hscopedVal : ChannelConfig.WellScoped
  {s with control := .value (.payload value)} :=
  ChannelInternalStep.preserve_wellScoped hstepRet hscoped
have hval :=
  value_under_two_closures_nil_presentedChannelConfigCompleteness
  D_0 j_0 realize
  (s := {s with control := .value (.payload value)})
  (arg := .payload value) (y := y) (x := x)
  (bodyY := bodyY) (bodyX := bodyX) (cloY := cloY) (cloX := cloX)
  rfl hs hadminY hnoappX hscopedVal hrelVal
exact return_presentedChannelConfigCompleteness D_0 j_0 realize
  hc hrel hval

theorem pauliX_under_two_closures_nil_presentedChannelConfigCompleteness
{C : Type}
(D_0 : QDomain.{0})
(j_0 : IsContinuousLatticeProjection D_0.carrier
  (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
(realize : C -> HSemanticValue D_0 j_0)
{s : ChannelConfig C} {value : C}
{y x : Name} {bodyY bodyX : Term (QubitPrimitive C)}
{cloY cloX : RuntimeEnv C} {answer : HSemanticComp D_0 j_0}
(hc : s.control = .term (.prim (.pauliX value)))
(hs : s.stack =
  [.function (.closure y bodyY cloY),
   .function (.closure x bodyX cloX)])
(hadminY : AdminNoApp bodyY) (hnoappX : NoApp bodyX)
(hscoped : ChannelConfig.WellScoped s)
(hrel : ChannelConfigRel D_0 j_0 realize s answer) :
PresentedChannelConfigCompleteness D_0 j_0 realize s answer := by
have hsPx :
  {s with control := .term (.prim (.pauliX value))} = s :=
  ChannelConfig.ext hc.symm rfl rfl rfl
obtain <semanticEnv, kStack, henv, hstack, rfl> :=
  channelConfigRel_term_inv D_0 j_0 hc hrel
rw [hs] at hstack
cases hstack
case function f krest hfn hrest =>
  cases hrest
  case function f2 krest2 hfn2 hrest2 =>
    cases hrest2
    let sVal : ChannelConfig C :=

```

```

{ s with
  control := .value (.payload value)
  quantum := applyOperation Qubit.pauliXOp s.quantum }
have hstep : ChannelInternalStep s sVal := by
  have happ :
    ChannelInternalStep
      { s with control := .term (.prim (.pauliX value)) }
      sVal :=
        ChannelInternalStep.pauliXPrimitive (s := s) (value := value)
  exact hsPx.symm |> happ
have hscopedVal : ChannelConfig.WellScoped sVal :=
  ChannelInternalStep.preserve_wellScoped hstep hscoped
have hrelVal : ChannelConfigRel D_0 j_0 realize sVal
  ((fun ma =>
    id (semanticBind (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0)
      (semanticUnfold (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0) f2)
      (semanticBind (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0)
        (semanticUnfold (Q := TTEExternalContinuationPower 2)
          (D_0 := D_0) (j_0 := j_0) f) ma)))
      (semanticUnit (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0) (realize value))) :=
    <semanticUnit (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0) (realize value),
    fun ma =>
      id (semanticBind (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0)
        (semanticUnfold (Q := TTEExternalContinuationPower 2)
          (D_0 := D_0) (j_0 := j_0) f2)
        (semanticBind (Q := TTEExternalContinuationPower 2)
          (D_0 := D_0) (j_0 := j_0)
          (semanticUnfold (Q := TTEExternalContinuationPower 2)
            (D_0 := D_0) (j_0 := j_0) f) ma)),
      ControlRel.value _ _ s.env
      (payload_related D_0 j_0 realize value),
    hs.symm |>
    StackRel.function (.closure y bodyY cloY) f
      [.function (.closure x bodyX cloX)]
      (fun ma =>
        id (semanticBind (Q := TTEExternalContinuationPower 2)
          (D_0 := D_0) (j_0 := j_0)
          (semanticUnfold (Q := TTEExternalContinuationPower 2)
            (D_0 := D_0) (j_0 := j_0) f2) ma))
      hfn
      (StackRel.function (.closure x bodyX cloX) f2 [] id hfn2
        StackRel.nil), rfl)
  have hval :=
    value_under_two_closures_nil_presentedChannelConfigCompleteness
      D_0 j_0 realize (s := sVal) (arg := .payload value)
      (y := y) (x := x) (bodyY := bodyY) (bodyX := bodyX)
      (cloY := cloY) (cloX := cloX) rfl hs hadminY hnoappX
      hscopedVal hrelVal
  refine
    { related := hrel
      complete := ?_ }
  constructor
  intro selectors i ? k? hk
  have hchildEq :=
    hval.complete.selected_result_eq_channelTree_sup_presented
      selectors i ? k? hk
  have hden :

```

```

    interp (hardwarePrimitive D_0 j_0 realize)
      (.prim (.pauliX value)) semanticEnv =
        taggedEmbed
          (FiniteInstrumentComp.ofOperation Qubit.pauliXOp
            (realize value)) := by
    simp [hardwarePrimitive_pauliX]
  have hchildCoord :
    semanticBind (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0)
      (semanticUnfold (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0) f2)
      (semanticBind (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0)
          (semanticUnfold (Q := TTEExternalContinuationPower 2)
            (D_0 := D_0) (j_0 := j_0) f)
            (semanticUnit (Q := TTEExternalContinuationPower 2)
              (D_0 := D_0) (j_0 := j_0) (realize value))))
      (HardwareAdequacy.encodePath selectors i) k? =
    sSup (channelTreeResults D_0 j_0 realize sVal selectors i
      k?) := by
    simp only [id] at hchildEq
    rw [selectPath_semanticBind] at hchildEq
    exact hchildEq
  simp only [id]
  rw [hden, selectPath_semanticBind,
    semanticBind_bind_ofOperation_eval D_0 j_0
      (semanticUnfold (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0) f2)
      (semanticUnfold (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0) f)
      Qubit.pauliXOp (realize value),
    hchildCoord, embed_ofOperation_const_sSup]
  apply le_antisymm
  * apply sSup_le
    rintro T <r, <fuel, child, R, hdepth, rfl>, rfl>
    apply le_sSup
    refine <fuel + 1, ChannelTree.internal hstep child,
      wrapInternalRealization D_0 j_0 realize hstep child R, ?_, ?_>
    * change child.depth + 1 <= fuel + 1
      omega
    * exact
      (restrictedResult_internal_pauliX D_0 j_0 realize hstep hc
        child
          (wrapInternalRealization D_0 j_0 realize hstep child R)
          selectors i ? k? hk).symm
  * apply sSup_le
    rintro T <_, tree, R, _, rfl>
    cases tree with
    | terminal hterm =>
      cases hterm.control_eq.symm.trans hc
    | @internal _ t' h next =>
      have ht : t' = sVal :=
        ChannelInternalStep.eq_config_of_pauliX h hc
      subst t'
      rw [restrictedResult_internal_pauliX D_0 j_0 realize h hc
        next R selectors i ? k? hk]
      apply le_sSup
      refine <restrictedResult D_0 j_0 realize next
        (internalChildRealization D_0 j_0 realize h next R)
        selectors i k?,
        <next.depth, next,
          internalChildRealization D_0 j_0 realize h next R,
          le_rfl, rfl>, rfl>

```

```

| external _ hex _ =>
  exact False.elim (ChannelExternalStep.not_prim hex hc)
| probability _ _ _ =>
  cases hc
| probabilityZero _ =>
  cases hc
| probabilityOne _ =>
  cases hc
| measurement _ _ =>
  cases hc

/-- Administrative NoApp under two stacked ordinary closures. -/
theorem admin_noapp_under_two_closures_nil_presentedChannelConfigCompleteness
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} {code : Term (QubitPrimitive C)}
  {y x : Name} {bodyY bodyX : Term (QubitPrimitive C)}
  {cloY cloX : RuntimeEnv C} {answer : HSemanticComp D_0 j_0}
  (hadmin : AdminNoApp code)
  (hc : s.control = .term code)
  (hs : s.stack =
    [.function (.closure y bodyY cloY),

```

Lean 4 source (lines 8401–8800)

```

    .function (.closure x bodyX cloX)]]
  (hadminY : AdminNoApp bodyY) (hnoappX : NoApp bodyX)
  (hscoped : ChannelConfig.WellScoped s)
  (hrel : ChannelConfigRel D_0 j_0 realize s answer) :
  PresentedChannelConfigCompleteness D_0 j_0 realize s answer := by
induction code generalizing s answer with
| var z =>
  have hctl := hscoped.left
  rw [hc] at hctl
  obtain <v, hlookup> := hctl.right z (by simp [free])
  have hsVar :
    {s with control := .term (.var z)} = s :=
    ChannelConfig.ext hc.symm rfl rfl rfl
  have hrelVar : ChannelConfigRel D_0 j_0 realize
    {s with control := .term (.var z)} answer :=
    hsVar.symm |> hrel
  have hrelVal :=
    channel_config_variable D_0 j_0 hlookup hrelVar
  have hscopedVal : ChannelConfig.WellScoped
    {s with control := .value v} :=
    <<hctl.left, hctl.left z v hlookup>, hscoped.right>
  have hval :=
    value_under_two_closures_nil_presentedChannelConfigCompleteness
      D_0 j_0 realize (s := {s with control := .value v})
      (arg := v) (y := y) (x := x) (bodyY := bodyY)
      (bodyX := bodyX) (cloY := cloY) (cloX := cloX)
      rfl hs hadminY hnoappX hscopedVal hrelVal
  exact variable_presentedChannelConfigCompleteness D_0 j_0 realize
    hc hlookup hrel hval
| app _ _ =>
  exact False.elim hadmin
| lam z M _ih =>
  have hsLam :
    {s with control := .term (.lam z M)} = s :=
    ChannelConfig.ext hc.symm rfl rfl rfl
  have hrelLam : ChannelConfigRel D_0 j_0 realize

```

```

      {s with control := .term (.lam z M)} answer :=
    hsLam.symm |> hrel
  have hrelVal :=
    channel_config_lambda D_0 j_0 (s := s) hrelLam
  have hstepLam : ChannelInternalStep s
    {s with control := .value (.closure z M s.env)} := by
    have happ :
      ChannelInternalStep
        {s with control := .term (.lam z M)}
        {s with control := .value (.closure z M s.env)} :=
      ChannelInternalStep.lambda (s := s) (x := z) (body := M)
    exact hsLam.symm |> happ
  have hscopedVal : ChannelConfig.WellScoped
    {s with control := .value (.closure z M s.env)} :=
    ChannelInternalStep.preserve_wellScoped hstepLam hscoped
  have hval :=
    value_under_two_closures_nil_presentedChannelConfigCompleteness
      D_0 j_0 realize
      (s := {s with control := .value (.closure z M s.env)})
      (arg := .closure z M s.env) (y := y) (x := x)
      (bodyY := bodyY) (bodyX := bodyX) (cloY := cloY)
      (cloX := cloX) rfl hs hadminY hnoappX hscopedVal hrelVal
    exact lambda_presentedChannelConfigCompleteness D_0 j_0 realize
      hc hrel hval
| recLam self z M _ih =>
  have hsRec :
    {s with control := .term (.recLam self z M)} = s :=
    ChannelConfig.ext hc.symm rfl rfl rfl
  have hrelRec : ChannelConfigRel D_0 j_0 realize
    {s with control := .term (.recLam self z M)} answer :=
    hsRec.symm |> hrel
  have hrelVal :=
    channel_config_recursive D_0 j_0 (s := s) hrelRec
  have hstepRec : ChannelInternalStep s
    {s with control := .value (.recClosure self z M s.env)} := by
    have happ :
      ChannelInternalStep
        {s with control := .term (.recLam self z M)}
        {s with
          control := .value (.recClosure self z M s.env)} :=
      ChannelInternalStep.recursive (s := s) (self := self)
        (arg := z) (body := M)
    exact hsRec.symm |> happ
  have hscopedVal : ChannelConfig.WellScoped
    {s with control := .value (.recClosure self z M s.env)} :=
    ChannelInternalStep.preserve_wellScoped hstepRec hscoped
  have hval :=
    value_under_two_closures_nil_presentedChannelConfigCompleteness
      D_0 j_0 realize
      (s :=
        {s with control := .value (.recClosure self z M s.env)})
      (arg := .recClosure self z M s.env) (y := y) (x := x)
      (bodyY := bodyY) (bodyX := bodyX) (cloY := cloY)
      (cloX := cloX) rfl hs hadminY hnoappX hscopedVal hrelVal
    exact recLam_presentedChannelConfigCompleteness D_0 j_0 realize
      hc hrel hval
| intern left right ihL ihR =>
  have <hnaL, hnaR> := hadmin
  have hscopedL :=
    wellScoped_term_child (child := left) hc hscoped
    (fun z hz => by simp [free, hz])
  have hscopedR :=
    wellScoped_term_child (child := right) hc hscoped

```

```

      (fun z hz => by simp [free, hz])
    refine intern_related_presentedChannelConfigCompleteness
      D_0 j_0 realize hc hrel ?_ ?_
    * intro semanticEnv k henv hstack
      exact ihL hnaL (s := {s with control := .term left}) rfl hs
      hscopedL
      <interp (hardwarePrimitive D_0 j_0 realize) left semanticEnv, k,
        ControlRel.term left s.env semanticEnv henv, hstack, rfl>
    * intro semanticEnv k henv hstack
      exact ihR hnaR (s := {s with control := .term right}) rfl hs
      hscopedR
      <interp (hardwarePrimitive D_0 j_0 realize) right semanticEnv, k,
        ControlRel.term right s.env semanticEnv henv, hstack, rfl>
  | extern _ _ _ =>
    exact False.elim hadmin
  | prob p left right ihL ihR =>
    have <hnaL, hnaR> := hadmin
    have hscopedL :=
      wellScoped_term_child (child := left) hc hscoped
      (fun z hz => by simp [free, hz])
    have hscopedR :=
      wellScoped_term_child (child := right) hc hscoped
      (fun z hz => by simp [free, hz])
    refine prob_related_presentedChannelConfigCompleteness
      D_0 j_0 realize hc hrel ?_ ?_
    * intro semanticEnv k quantum henv hstack
      exact ihL hnaL
      (s := {s with control := .term left, quantum := quantum})
      rfl hs <hscopedL.left, hscopedL.right>
      <interp (hardwarePrimitive D_0 j_0 realize) left semanticEnv, k,
        ControlRel.term left s.env semanticEnv henv, hstack, rfl>
    * intro semanticEnv k quantum henv hstack
      exact ihR hnaR
      (s := {s with control := .term right, quantum := quantum})
      rfl hs <hscopedR.left, hscopedR.right>
      <interp (hardwarePrimitive D_0 j_0 realize) right semanticEnv, k,
        ControlRel.term right s.env semanticEnv henv, hstack, rfl>
  | prim prim =>
    cases prim with
  | ret value =>
    exact
      ret_under_two_closures_nil_presentedChannelConfigCompleteness
      D_0 j_0 realize hc hs hadminY hnoappX hscoped hrel
  | pauliX value =>
    exact
      pauliX_under_two_closures_nil_presentedChannelConfigCompleteness
      D_0 j_0 realize hc hs hadminY hnoappX hscoped hrel
  | measureZ _ _ =>
    exact False.elim hadmin

/-- Inner `app (lam y bodyY) arg` under one outer closure frame. -/
theorem app_lam_under_closure_nil_presentedChannelConfigCompleteness
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} {y x : Name}
  {bodyY bodyX arg : Term (QubitPrimitive C)}
  {cloX : RuntimeEnv C} {answer : HSemanticComp D_0 j_0}
  (hc : s.control = .term (.app (.lam y bodyY) arg))
  (hs : s.stack = [.function (.closure x bodyX cloX)])
  (hadminY : AdminNoApp bodyY) (hadminArg : AdminNoApp arg)

```

```

(hnoappX : NoApp bodyX)
(hscoped : ChannelConfig.WellScoped s)
(hrel : ChannelConfigRel D_0 j_0 realize s answer) :
PresentedChannelConfigCompleteness D_0 j_0 realize s answer := by
have hsApp :
  {s with control := .term (.app (.lam y bodyY) arg)} = s :=
  ChannelConfig.ext hc.symm rfl rfl rfl
have hrelApp : ChannelConfigRel D_0 j_0 realize
  {s with control := .term (.app (.lam y bodyY) arg)} answer :=
  hsApp.symm |> hrel
have hrellam :=
  channel_config_application D_0 j_0 (s := s)
  (fn := .lam y bodyY) (arg := arg) hrelApp
have hrelClo :=
  channel_config_lambda D_0 j_0
  (s := {s with stack := .argument arg s.env :: s.stack})
  hrellam
have hrelArg :=
  channel_config_evaluateArgument D_0 j_0
  (s :=
    {s with
      control := .value (.closure y bodyY s.env)
      stack := .argument arg s.env :: s.stack})
  (fn := .closure y bodyY s.env) (arg := arg)
  (callEnv := s.env) (rest := s.stack) hrelClo
let sArg : ChannelConfig C :=
  {s with
    control := .term arg
    stack :=
      .function (.closure y bodyY s.env) :: s.stack}
have hstepApp : ChannelInternalStep s
  {s with
    control := .term (.lam y bodyY)
    stack := .argument arg s.env :: s.stack} := by
have happ :
  ChannelInternalStep
  {s with control := .term (.app (.lam y bodyY) arg)}
  {s with
    control := .term (.lam y bodyY)
    stack := .argument arg s.env :: s.stack} :=
  ChannelInternalStep.application (s := s) (fn := .lam y bodyY)
  (arg := arg)
exact hsApp.symm |> happ
have hstepLam : ChannelInternalStep
  {s with
    control := .term (.lam y bodyY)
    stack := .argument arg s.env :: s.stack}
  {s with
    control := .value (.closure y bodyY s.env)
    stack := .argument arg s.env :: s.stack} :=
  ChannelInternalStep.lambda
  (s := {s with stack := .argument arg s.env :: s.stack})
  (x := y) (body := bodyY)
have hstepArg : ChannelInternalStep
  {s with
    control := .value (.closure y bodyY s.env)
    stack := .argument arg s.env :: s.stack}
  sArg :=
  ChannelInternalStep.evaluateArgument
  (s :=
    {s with
      control := .value (.closure y bodyY s.env)
      stack := .argument arg s.env :: s.stack})

```



```

      (fn := .closure y bodyY s.env) (arg := arg)
      (callEnv := s.env) (rest := s.stack)
have hscopedArg : ChannelConfig.WellScoped sArg :=
  ChannelInternalStep.preserve_wellScoped hstepArg
  (ChannelInternalStep.preserve_wellScoped hstepLam
    (ChannelInternalStep.preserve_wellScoped hstepApp hscoped))
have hsArg :
  sArg.stack =
    [.function (.closure y bodyY s.env),
     .function (.closure x bodyX cloX)] := by
  simp [sArg, hs]
have harg :
  PresentedChannelConfigCompleteness D_0 j_0 realize sArg answer :=
  admin_noapp_under_two_closures_nil_presentedChannelConfigCompleteness
  D_0 j_0 realize (s := sArg) (code := arg) (y := y) (x := x)
  (bodyY := bodyY) (bodyX := bodyX) (cloY := s.env) (cloX := cloX)
  hadminArg rfl hsArg hadminY hnoappX hscopedArg
  (by
    change ChannelConfigRel D_0 j_0 realize
      {s with
        control := .term arg
        env := s.env
        stack :=
          .function (.closure y bodyY s.env) :: s.stack}
      -
      exact hrelArg)
exact stacked_lam_app_presentedChannelConfigCompleteness D_0 j_0 realize
  (s := s) (x := y) (body := bodyY) (arg := arg) hc hrel harg

/-- Closed `app (lam x bodyX) (app (lam y bodyY) arg)` is
presented-complete when `bodyX` is application-free and both `bodyY`
and `arg` are administrative NoApp. -/
theorem closed_nested_lam_admin_noapp_presented_channelTreeCompleteness
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (x y : Name) (bodyX bodyY arg : Term (QubitPrimitive C))
  (hclosed : Closed
    (.app (.lam x bodyX) (.app (.lam y bodyY) arg)))
  (hnoappX : NoApp bodyX)
  (hadminY : AdminNoApp bodyY) (hadminArg : AdminNoApp arg)
  (quantum : NormalizedDensity 2)
  (semanticEnv : Env (HSemanticValue D_0 j_0)) :
  PresentedChannelTreeCompleteness D_0 j_0 realize
    (initialChannelConfig
      (.app (.lam x bodyX) (.app (.lam y bodyY) arg)) quantum)
    (interp (hardwarePrimitive D_0 j_0 realize)
      (.app (.lam x bodyX) (.app (.lam y bodyY) arg))
      semanticEnv) := by
  let inner : Term (QubitPrimitive C) := .app (.lam y bodyY) arg
  let code : Term (QubitPrimitive C) := .app (.lam x bodyX) inner
  let s : ChannelConfig C := initialChannelConfig code quantum
  have hc : s.control = .term code := rfl
  have hrel :=
    initialChannelConfig_related D_0 j_0 realize code quantum semanticEnv
  have hscoped :=
    initialChannelConfig_wellScoped hclosed quantum
  have hsApp :
    {s with control := .term (.app (.lam x bodyX) inner)} = s :=
    ChannelConfig.ext hc.symm rfl rfl rfl
  have hrelApp : ChannelConfigRel D_0 j_0 realize

```

```

    {s with control := .term (.app (.lam x bodyX) inner)}}
    (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv) :=
  hsApp.symm |> hrel
have hrelLam :=
  channel_config_application D_0 j_0 (s := s)
  (fn := .lam x bodyX) (arg := inner) hrelApp
have hrelClo :=
  channel_config_lambda D_0 j_0
  (s := {s with stack := .argument inner s.env :: s.stack})
  hrelLam
have hrelInner :=
  channel_config_evaluateArgument D_0 j_0
  (s :=
    {s with
      control := .value (.closure x bodyX s.env)
      stack := .argument inner s.env :: s.stack})
  (fn := .closure x bodyX s.env) (arg := inner)
  (callEnv := s.env) (rest := s.stack) hrelClo
let sInner : ChannelConfig C :=
  {s with
    control := .term inner
    stack := .function (.closure x bodyX s.env) :: s.stack}
have hstepApp : ChannelInternalStep s
  {s with
    control := .term (.lam x bodyX)
    stack := .argument inner s.env :: s.stack} := by
  have happ :
    ChannelInternalStep
    {s with control := .term (.app (.lam x bodyX) inner)}}
    {s with
      control := .term (.lam x bodyX)
      stack := .argument inner s.env :: s.stack} :=
    ChannelInternalStep.application (s := s) (fn := .lam x bodyX)
    (arg := inner)
  exact hsApp.symm |> happ
have hstepLam : ChannelInternalStep
  {s with
    control := .term (.lam x bodyX)
    stack := .argument inner s.env :: s.stack}
  {s with
    control := .value (.closure x bodyX s.env)
    stack := .argument inner s.env :: s.stack} :=
  ChannelInternalStep.lambda
  (s := {s with stack := .argument inner s.env :: s.stack})
  (x := x) (body := bodyX)
have hstepInner : ChannelInternalStep
  {s with
    control := .value (.closure x bodyX s.env)
    stack := .argument inner s.env :: s.stack}
  sInner :=
  ChannelInternalStep.evaluateArgument
  (s :=
    {s with
      control := .value (.closure x bodyX s.env)
      stack := .argument inner s.env :: s.stack})
  (fn := .closure x bodyX s.env) (arg := inner)
  (callEnv := s.env) (rest := s.stack)
have hscopedInner : ChannelConfig.WellScoped sInner :=
  ChannelInternalStep.preserve_wellScoped hstepInner
  (ChannelInternalStep.preserve_wellScoped hstepLam
    (ChannelInternalStep.preserve_wellScoped hstepApp hscoped))
have hsInner :
  sInner.stack = [.function (.closure x bodyX s.env)] := by

```

```

simp [sInner, s, initialChannelConfig, ofConfig, initialConfig]
have hinner :
  PresentedChannelConfigCompleteness D_0 j_0 realize sInner
    (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv) :=
app_lam_under_closure_nil_presentedChannelConfigCompleteness
  D_0 j_0 realize (s := sInner) (y := y) (x := x)
  (bodyY := bodyY) (bodyX := bodyX) (arg := arg)
  (cloX := s.env) rfl hsInner hadminY hadminArg hnoappX
  hscopedInner
  (by
    change ChannelConfigRel D_0 j_0 realize
      {s with
        control := .term inner
        env := s.env
        stack := .function (.closure x bodyX s.env) :: s.stack}
      -
    exact hrelInner)
exact (stacked_lam_app_presentedChannelConfigCompleteness D_0 j_0 realize
  (s := s) (x := x) (body := bodyX) (arg := inner)
  hc hrel hinner).complete

/-- Token adequacy for closed nested `app (lam x bodyX) (app (lam y bodyY) arg)` -/
theorem closed_nested_lam_admin_noapp_presented_token_adequacy
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (x y : Name) (bodyX bodyY arg : Term (QubitPrimitive C))
  (hclosed : Closed
    (.app (.lam x bodyX) (.app (.lam y bodyY) arg)))
  (hnoappX : NoApp bodyX)
  (hadminY : AdminNoApp bodyY) (hadminArg : AdminNoApp arg)
  (quantum : NormalizedDensity 2)
  (semanticEnv : Env (HSemanticValue D_0 j_0))
  (selectors : List Bool)
  (? : HSemanticValue D_0 j_0 -> FiniteInstrumentComp 2 PUnit.{1})
  (k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2))
  (hk : forall d, k d = (? d).satisfiedTTTheory resultCode)
  (i : Nat) (token : TTObservationToken 2) :
token in HardwareAdequacy.selectPath selectors
  (interp (hardwarePrimitive D_0 j_0 realize)
    (.app (.lam x bodyX) (.app (.lam y bodyY) arg))
    semanticEnv) i k <->
exists fuel, exists (tree : ChannelTree C
  (initialChannelConfig
    (.app (.lam x bodyX) (.app (.lam y bodyY) arg)) quantum))
  (R : ChannelTreeRealization D_0 j_0 realize tree),
tree.depth <= fuel /\

```

Lean 4 source (lines 8801–9200)

```

ResultAvailable tree selectors i /\
  TTObservationToken.Holds resultCode token
  ((restrictedInstrument D_0 j_0 realize tree R selectors i).bind
    ?) :=
presented_channel_tree_token_adequacy_iff D_0 j_0 realize
  (initialChannelConfig
    (.app (.lam x bodyX) (.app (.lam y bodyY) arg)) quantum)
  (interp (hardwarePrimitive D_0 j_0 realize)
    (.app (.lam x bodyX) (.app (.lam y bodyY) arg)) semanticEnv)
  (closed_nested_lam_admin_noapp_presented_channelTreeCompleteness
    D_0 j_0 realize x y bodyX bodyY arg hclosed hnoappX hadminY
    hadminArg quantum semanticEnv)

```

```

selectors ? k hk i token

/-- A lambda under an argument frame whose saved env may differ from
the current control env. After beta of a curried application the
frame still carries the outer call env. -/
theorem lam_under_argument_frame_admin_noapp_presentedChannelConfigCompleteness
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} {x : Name}
  {body arg : Term (QubitPrimitive C)} {callEnv : RuntimeEnv C}
  {answer : HSemanticComp D_0 j_0}
  (hc : s.control = .term (.lam x body))
  (hs : s.stack = [.argument arg callEnv])
  (hnoapp : NoApp body) (hadminArg : AdminNoApp arg)
  (hscoped : ChannelConfig.WellScoped s)
  (hrel : ChannelConfigRel D_0 j_0 realize s answer) :
  PresentedChannelConfigCompleteness D_0 j_0 realize s answer := by
have hSLam :
  {s with control := .term (.lam x body)} = s :=
  ChannelConfig.ext hc.symm rfl rfl rfl
have hrelLam : ChannelConfigRel D_0 j_0 realize
  {s with control := .term (.lam x body)} answer :=
  hSLam.symm |> hrel
have hrelClo :=
  channel_config_lambda D_0 j_0 (s := s) hrelLam
have hsrcClo :
  {s with control := .value (.closure x body s.env)} =
  {s with
    control := .value (.closure x body s.env)
    stack := .argument arg callEnv :: []} :=
  ChannelConfig.ext rfl rfl hs rfl
have hrelFn :=
  channel_config_evaluateArgument D_0 j_0
  (s := {s with control := .value (.closure x body s.env)})
  (fn := .closure x body s.env) (arg := arg)
  (callEnv := callEnv) (rest := [])
  (hsrcClo |> hrelClo)
have hstepLam : ChannelInternalStep s
  {s with control := .value (.closure x body s.env)} := by
have happ :
  ChannelInternalStep
  {s with control := .term (.lam x body)}
  {s with control := .value (.closure x body s.env)} :=
  ChannelInternalStep.lambda (s := s) (x := x) (body := body)
exact hSLam.symm |> happ
have hstepArg : ChannelInternalStep
  {s with control := .value (.closure x body s.env)}
  {s with
    control := .term arg
    env := callEnv
    stack := .function (.closure x body s.env) :: []} := by
have happ :
  ChannelInternalStep
  {s with
    control := .value (.closure x body s.env)
    stack := .argument arg callEnv :: []}
  {s with
    control := .term arg
    env := callEnv
    stack := .function (.closure x body s.env) :: []} :=

```

```

    ChannelInternalStep.evaluateArgument
      (s := {s with control := .value (.closure x body s.env)})
      (fn := .closure x body s.env) (arg := arg)
      (callEnv := callEnv) (rest := [])
  exact hsrcClo.symm |> happ
have hscopedFn : ChannelConfig.WellScoped
  {s with
    control := .term arg
    env := callEnv
    stack := .function (.closure x body s.env) :: []} :=
  ChannelInternalStep.preserve_wellScoped hstepArg
  (ChannelInternalStep.preserve_wellScoped hstepLam hscoped)
have harg :
  PresentedChannelConfigCompleteness D_0 j_0 realize
  {s with
    control := .term arg
    env := callEnv
    stack := .function (.closure x body s.env) :: []}
  answer :=
  admin_noapp_under_closure_nil_presentedChannelConfigCompleteness
  D_0 j_0 realize
  (s :=
    {s with
      control := .term arg
      env := callEnv
      stack := .function (.closure x body s.env) :: []})
  (code := arg) (x := x) (body := body) (cloEnv := s.env)
  hadminArg rfl rfl hnoapp hscopedFn hrelFn
have hClo :=
  evaluateArgument_presentedChannelConfigCompleteness D_0 j_0 realize
  (s := {s with control := .value (.closure x body s.env)})
  (fn := .closure x body s.env) (arg := arg)
  (callEnv := callEnv) (rest := []) rfl hs hrelClo harg
exact lambda_presentedChannelConfigCompleteness D_0 j_0 realize
  hc hrel hClo

/-- A value under a curried function frame over a leftover argument
frame betas to the inner lambda, then evaluates that argument. -/
theorem value_under_function_argument_nil_presentedChannelConfigCompleteness
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} {arg : RuntimeValue C}
  {x y : Name} {body arg2 : Term (QubitPrimitive C)}
  {cloX callEnv : RuntimeEnv C} {answer : HSemanticComp D_0 j_0}
  (hc : s.control = .value arg)
  (hs : s.stack =
    [.function (.closure x (.lam y body) cloX),
     .argument arg2 callEnv])
  (hnoapp : NoApp body) (hadminArg2 : AdminNoApp arg2)
  (hscoped : ChannelConfig.WellScoped s)
  (hrel : ChannelConfigRel D_0 j_0 realize s answer) :
  PresentedChannelConfigCompleteness D_0 j_0 realize s answer := by
have hsEq :
  {s with
    control := .value arg
    stack :=
      .function (.closure x (.lam y body) cloX) ::
        [.argument arg2 callEnv]} = s :=
  ChannelConfig.ext hc.symm rfl hs.symm rfl
have hrel' : ChannelConfigRel D_0 j_0 realize

```

```

    {s with
      control := .value arg
      stack :=
        .function (.closure x (.lam y body) cloX) ::
          [.argument arg2 callEnv]}
    answer :=
    hsEq.symm |> hrel
have hrelBody :=
  channel_config_beta D_0 j_0 (s := s) (x := x)
    (body := .lam y body) (closureEnv := cloX) (arg := arg)
    (rest := [.argument arg2 callEnv]) hrel'
let sBody : ChannelConfig C :=
  {s with
    control := .term (.lam y body)
    env := RuntimeEnv.bind x arg cloX
    stack := [.argument arg2 callEnv]}
have hstepBeta : ChannelInternalStep s sBody := by
  have happ :
    ChannelInternalStep
      {s with
        control := .value arg
        stack :=
          .function (.closure x (.lam y body) cloX) ::
            [.argument arg2 callEnv]}
        sBody :=
          ChannelInternalStep.beta (s := s) (x := x)
            (body := .lam y body) (closureEnv := cloX) (arg := arg)
            (rest := [.argument arg2 callEnv])
      exact hsEq.symm |> happ
have hscopedBody : ChannelConfig.WellScoped sBody :=
  ChannelInternalStep.preserve_wellScoped hstepBeta hscoped
have hchild :=
  lam_under_argument_frame_admin_noapp_presentedChannelConfigCompleteness
    D_0 j_0 realize (s := sBody) (x := y) (body := body) (arg := arg2)
    (callEnv := callEnv) rfl rfl hnoapp hadminArg2 hscopedBody
    hrelBody
exact beta_presentedChannelConfigCompleteness D_0 j_0 realize
  (s := s) (x := x) (body := .lam y body) (closureEnv := cloX)
  (arg := arg) (rest := [.argument arg2 callEnv]) hc hs hrel hchild

theorem ret_under_function_argument_nil_presentedChannelConfigCompleteness
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} {value : C}
  {x y : Name} {body arg2 : Term (QubitPrimitive C)}
  {cloX callEnv : RuntimeEnv C} {answer : HSemanticComp D_0 j_0}
  (hc : s.control = .term (.prim (.ret value)))
  (hs : s.stack =
    [.function (.closure x (.lam y body) cloX),
     .argument arg2 callEnv])
  (hnoapp : NoApp body) (hadminArg2 : AdminNoApp arg2)
  (hscoped : ChannelConfig.WellScoped s)
  (hrel : ChannelConfigRel D_0 j_0 realize s answer) :
  PresentedChannelConfigCompleteness D_0 j_0 realize s answer := by
have hsRet :
  {s with control := .term (.prim (.ret value))} = s :=
  ChannelConfig.ext hc.symm rfl rfl rfl
have hrelRet : ChannelConfigRel D_0 j_0 realize
  {s with control := .term (.prim (.ret value))} answer :=
  hsRet.symm |> hrel

```

```

have hrelVal :=
  channel_config_return D_0 j_0 hrelRet
have hstepRet : ChannelInternalStep s
  {s with control := .value (.payload value)} := by
  have happ :
    ChannelInternalStep
      {s with control := .term (.prim (.ret value))}
      {s with control := .value (.payload value)} :=
    ChannelInternalStep.returnPrimitive (s := s) (value := value)
  exact hsRet.symm |> happ
have hscopedVal : ChannelConfig.WellScoped
  {s with control := .value (.payload value)} :=
  ChannelInternalStep.preserve_wellScoped hstepRet hscoped
have hval :=
  value_under_function_argument_nil_presentedChannelConfigCompleteness
  D_0 j_0 realize
  (s := {s with control := .value (.payload value)})
  (arg := .payload value) (x := x) (y := y) (body := body)
  (arg2 := arg2) (cloX := cloX) (callEnv := callEnv)
  rfl hs hnoapp hadminArg2 hscopedVal hrelVal
exact return_presentedChannelConfigCompleteness D_0 j_0 realize
  hc hrel hval

theorem pauliX_under_function_argument_nil_presentedChannelConfigCompleteness
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} {value : C}
  {x y : Name} {body arg2 : Term (QubitPrimitive C)}
  {cloX callEnv : RuntimeEnv C} {answer : HSemanticComp D_0 j_0}
  (hc : s.control = .term (.prim (.pauliX value)))
  (hs : s.stack =
    [.function (.closure x (.lam y body) cloX),
     .argument arg2 callEnv])
  (hnoapp : NoApp body) (hadminArg2 : AdminNoApp arg2)
  (hscoped : ChannelConfig.WellScoped s)
  (hrel : ChannelConfigRel D_0 j_0 realize s answer) :
  PresentedChannelConfigCompleteness D_0 j_0 realize s answer := by
have hsPx :
  {s with control := .term (.prim (.pauliX value))} = s :=
  ChannelConfig.ext hc.symm rfl rfl rfl
obtain <semanticEnv, kStack, henv, hstack, rfl> :=
  channelConfigRel_term_inv D_0 j_0 hc hrel
rw [hs] at hstack
cases hstack
case function f krest hfn hrest =>
  cases hrest
  case argument semanticEnv' krest2 henvArg hrest2 =>
    cases hrest2
    let sVal : ChannelConfig C :=
      {s with
        control := .value (.payload value)
        quantum := applyOperation Qubit.pauliXOp s.quantum}
    have hstep : ChannelInternalStep s sVal := by
      have happ :
        ChannelInternalStep
          {s with control := .term (.prim (.pauliX value))}
          sVal :=
        ChannelInternalStep.pauliXPrimitive (s := s) (value := value)
      exact hsPx.symm |> happ
    have hscopedVal : ChannelConfig.WellScoped sVal :=

```

```

ChannelInternalStep.preserve_wellScoped hstep hscoped
have hrelVal : ChannelConfigRel D_0 j_0 realize sVal
((fun ma =>
  id (semanticBind (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0)
    (applyContinuation (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0)
      (interp (hardwarePrimitive D_0 j_0 realize) arg2)
      semanticEnv')
    (semanticBind (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0)
      (semanticUnfold (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0) f) ma)))
  (semanticUnit (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0) (realize value))) :=
<semanticUnit (Q := TTEExternalContinuationPower 2)
  (D_0 := D_0) (j_0 := j_0) (realize value),
fun ma =>
  id (semanticBind (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0)
    (applyContinuation (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0)
      (interp (hardwarePrimitive D_0 j_0 realize) arg2)
      semanticEnv')
    (semanticBind (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0)
      (semanticUnfold (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0) f) ma)),
ControlRel.value _ _ s.env
(payload_related D_0 j_0 realize value),
hs.symm |>
StackRel.function (.closure x (.lam y body) cloX) f
[.argument arg2 callEnv]
(fun ma =>
  id (semanticBind (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0)
    (applyContinuation
      (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0)
      (interp (hardwarePrimitive D_0 j_0 realize) arg2)
      semanticEnv') ma))
hfn
(StackRel.argument arg2 callEnv semanticEnv' [] id
  henvArg StackRel.nil), rfl>
have hval :=
  value_under_function_argument_nil_presentedChannelConfigCompleteness
  D_0 j_0 realize (s := sVal) (arg := .payload value)
  (x := x) (y := y) (body := body) (arg2 := arg2)
  (cloX := cloX) (callEnv := callEnv) rfl hs hnoapp
  hadminArg2 hscopedVal hrelVal
refine
{ related := hrel
  complete := ?_ }
constructor
intro selectors i ? k? hk
have hchildEq :=
  hval.complete.selected_result_eq_channelTree_sup_presented
  selectors i ? k? hk
have hden :
  interp (hardwarePrimitive D_0 j_0 realize)
    (.prim (.pauliX value)) semanticEnv =
  taggedEmbed
    (FiniteInstrumentComp.ofOperation Qubit.pauliXOp

```



```

      (realize value)) := by
    simp [hardwarePrimitive_pauliX]
  have hchildCoord :
    semanticBind (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0)
      (applyContinuation (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0)
        (interp (hardwarePrimitive D_0 j_0 realize) arg2)
        semanticEnv')
      (semanticBind (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0)
        (semanticUnfold (Q := TTEExternalContinuationPower 2)
          (D_0 := D_0) (j_0 := j_0) f)
        (semanticUnit (Q := TTEExternalContinuationPower 2)
          (D_0 := D_0) (j_0 := j_0) (realize value)))
      (HardwareAdequacy.encodePath selectors i) k? =
    sSup (channelTreeResults D_0 j_0 realize sVal selectors i
      k?) := by
    simp only [id] at hchildEq
    rw [selectPath_semanticBind] at hchildEq
    exact hchildEq
  simp only [id]
  rw [hden, selectPath_semanticBind,
    semanticBind_bind_ofOperation_eval D_0 j_0
    (applyContinuation (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0)
      (interp (hardwarePrimitive D_0 j_0 realize) arg2)
      semanticEnv')
    (semanticUnfold (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0) f)
    Qubit.pauliXOp (realize value),
    hchildCoord, embed_ofOperation_const_sSup]
  apply le_antisymm
  * apply sSup_le
    rintro T <r, <fuel, child, R, hdepth, rfl>, rfl>
    apply le_sSup
    refine <fuel + 1, ChannelTree.internal hstep child,
      wrapInternalRealization D_0 j_0 realize hstep child R, ?_, ?_>
    * change child.depth + 1 <= fuel + 1
      omega
    * exact
      (restrictedResult_internal_pauliX D_0 j_0 realize hstep hc
        child
        (wrapInternalRealization D_0 j_0 realize hstep child R)
        selectors i ? k? hk).symm
  * apply sSup_le
    rintro T <_, tree, R, _, rfl>
    cases tree with
    | terminal hterm =>
      cases hterm.control_eq.symm.trans hc
    | @internal _ t' h next =>
      have ht : t' = sVal :=
        ChannelInternalStep.eq_config_of_pauliX h hc
      subst t'
      rw [restrictedResult_internal_pauliX D_0 j_0 realize h hc
        next R selectors i ? k? hk]
      apply le_sSup
      refine <restrictedResult D_0 j_0 realize next
        (internalChildRealization D_0 j_0 realize h next R)
        selectors i k?,
        <next.depth, next,
        internalChildRealization D_0 j_0 realize h next R,
        le_rfl, rfl>, rfl>

```

```

| external _ hex _ =>
  exact False.elim (ChannelExternalStep.not_prim hex hc)
| probability _ _ _ =>
  cases hc
| probabilityZero _ =>
  cases hc
| probabilityOne _ =>
  cases hc
| measurement _ _ =>
  cases hc

```

Lean 4 source (lines 9201–9600)

```

/-- Administrative NoApp under a curried function frame over one
argument frame. -/
theorem admin_noapp_under_function_argument_nil_presentedChannelConfigCompleteness
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} {code : Term (QubitPrimitive C)}
  {x y : Name} {body arg2 : Term (QubitPrimitive C)}
  {cloX callEnv : RuntimeEnv C} {answer : HSemanticComp D_0 j_0}
  (hadmin : AdminNoApp code)
  (hc : s.control = .term code)
  (hs : s.stack =
    [function (.closure x (.lam y body) cloX),
     .argument arg2 callEnv])
  (hnoapp : NoApp body) (hadminArg2 : AdminNoApp arg2)
  (hscoped : ChannelConfig.WellScoped s)
  (hrel : ChannelConfigRel D_0 j_0 realize s answer) :
  PresentedChannelConfigCompleteness D_0 j_0 realize s answer := by
induction code generalizing s answer with
| var z =>
  have hctl := hscoped.left
  rw [hc] at hctl
  obtain <v, hlookup> := hctl.right z (by simp [free])
  have hsVar :
    {s with control := .term (.var z)} = s :=
    ChannelConfig.ext hc.symm rfl rfl rfl
  have hrelVar : ChannelConfigRel D_0 j_0 realize
    {s with control := .term (.var z)} answer :=
    hsVar.symm |> hrel
  have hrelVal :=
    channel_config_variable D_0 j_0 hlookup hrelVar
  have hscopedVal : ChannelConfig.WellScoped
    {s with control := .value v} :=
    <<hctl.left, hctl.left z v hlookup>, hscoped.right>
  have hval :=
    value_under_function_argument_nil_presentedChannelConfigCompleteness
      D_0 j_0 realize (s := {s with control := .value v})
      (arg := v) (x := x) (y := y) (body := body)
      (arg2 := arg2) (cloX := cloX) (callEnv := callEnv)
      rfl hs hnoapp hadminArg2 hscopedVal hrelVal
  exact variable_presentedChannelConfigCompleteness D_0 j_0 realize
    hc hlookup hrel hval
| app _ _ =>
  exact False.elim hadmin
| lam z M _ih =>
  have hsLam :
    {s with control := .term (.lam z M)} = s :=
    ChannelConfig.ext hc.symm rfl rfl rfl

```

```

have hrelLam : ChannelConfigRel D_0 j_0 realize
  {s with control := .term (.lam z M)} answer :=
  hsLam.symm |> hrel
have hrelVal :=
  channel_config_lambda D_0 j_0 (s := s) hrelLam
have hstepLam : ChannelInternalStep s
  {s with control := .value (.closure z M s.env)} := by
  have happ :
    ChannelInternalStep
      {s with control := .term (.lam z M)}
      {s with control := .value (.closure z M s.env)} :=
      ChannelInternalStep.lambda (s := s) (x := z) (body := M)
  exact hsLam.symm |> happ
have hscopedVal : ChannelConfig.WellScoped
  {s with control := .value (.closure z M s.env)} :=
  ChannelInternalStep.preserve_wellScoped hstepLam hscoped
have hval :=
  value_under_function_argument_nil_presentedChannelConfigCompleteness
  D_0 j_0 realize
  (s := {s with control := .value (.closure z M s.env)})
  (arg := .closure z M s.env) (x := x) (y := y)
  (body := body) (arg2 := arg2) (cloX := cloX)
  (callEnv := callEnv) rfl hs hnoapp hadminArg2 hscopedVal
  hrelVal
exact lambda_presentedChannelConfigCompleteness D_0 j_0 realize
  hc hrel hval
| recLam self z M _ih =>
  have hsRec :
    {s with control := .term (.recLam self z M)} = s :=
    ChannelConfig.ext hc.symm rfl rfl rfl
  have hrelRec : ChannelConfigRel D_0 j_0 realize
    {s with control := .term (.recLam self z M)} answer :=
    hsRec.symm |> hrel
  have hrelVal :=
    channel_config_recursive D_0 j_0 (s := s) hrelRec
  have hstepRec : ChannelInternalStep s
    {s with control := .value (.recClosure self z M s.env)} := by
    have happ :
      ChannelInternalStep
        {s with control := .term (.recLam self z M)}
        {s with
          control := .value (.recClosure self z M s.env)} :=
      ChannelInternalStep.recursive (s := s) (self := self)
      (arg := z) (body := M)
    exact hsRec.symm |> happ
  have hscopedVal : ChannelConfig.WellScoped
    {s with control := .value (.recClosure self z M s.env)} :=
    ChannelInternalStep.preserve_wellScoped hstepRec hscoped
  have hval :=
    value_under_function_argument_nil_presentedChannelConfigCompleteness
    D_0 j_0 realize
    (s :=
      {s with control := .value (.recClosure self z M s.env)})
    (arg := .recClosure self z M s.env) (x := x) (y := y)
    (body := body) (arg2 := arg2) (cloX := cloX)
    (callEnv := callEnv) rfl hs hnoapp hadminArg2 hscopedVal
    hrelVal
  exact recLam_presentedChannelConfigCompleteness D_0 j_0 realize
    hc hrel hval
| intern left right ihL ihR =>
  have <hnaL, hnaR> := hadmin
  have hscopedL :=
    wellScoped_term_child (child := left) hc hscoped

```

```

      (fun z hz => by simp [free, hz])
have hscopedR :=
  wellScoped_term_child (child := right) hc hscoped
  (fun z hz => by simp [free, hz])
refine intern_related_presentedChannelConfigCompleteness
  D_0 j_0 realize hc hrel ?_ ?_
* intro semanticEnv k henv hstack
  exact ihL hnaL (s := {s with control := .term left}) rfl hs
    hscopedL
    <interp (hardwarePrimitive D_0 j_0 realize) left semanticEnv, k,
      ControlRel.term left s.env semanticEnv henv, hstack, rfl>
* intro semanticEnv k henv hstack
  exact ihR hnaR (s := {s with control := .term right}) rfl hs
    hscopedR
    <interp (hardwarePrimitive D_0 j_0 realize) right semanticEnv, k,
      ControlRel.term right s.env semanticEnv henv, hstack, rfl>
| extern _ _ _ =>
  exact False.elim hadmin
| prob p left right ihL ihR =>
  have <hnaL, hnaR> := hadmin
  have hscopedL :=
    wellScoped_term_child (child := left) hc hscoped
    (fun z hz => by simp [free, hz])
  have hscopedR :=
    wellScoped_term_child (child := right) hc hscoped
    (fun z hz => by simp [free, hz])
  refine prob_related_presentedChannelConfigCompleteness
    D_0 j_0 realize hc hrel ?_ ?_
* intro semanticEnv k quantum henv hstack
  exact ihL hnaL
    (s := {s with control := .term left, quantum := quantum})
    rfl hs <hscopedL.left, hscopedL.right>
    <interp (hardwarePrimitive D_0 j_0 realize) left semanticEnv, k,
      ControlRel.term left s.env semanticEnv henv, hstack, rfl>
* intro semanticEnv k quantum henv hstack
  exact ihR hnaR
    (s := {s with control := .term right, quantum := quantum})
    rfl hs <hscopedR.left, hscopedR.right>
    <interp (hardwarePrimitive D_0 j_0 realize) right semanticEnv, k,
      ControlRel.term right s.env semanticEnv henv, hstack, rfl>
| prim prim =>
  cases prim with
  | ret value =>
    exact
      ret_under_function_argument_nil_presentedChannelConfigCompleteness
        D_0 j_0 realize hc hs hnoapp hadminArg2 hscoped hrel
  | pauliX value =>
    exact
      pauliX_under_function_argument_nil_presentedChannelConfigCompleteness
        D_0 j_0 realize hc hs hnoapp hadminArg2 hscoped hrel
  | measureZ _ _ =>
    exact False.elim hadmin

/-- Inner `app (lam x (lam y body)) arg1` under one leftover argument
frame. -/
theorem app_lam_lam_under_argument_nil_presentedChannelConfigCompleteness
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} {x y : Name}
  {body arg1 arg2 : Term (QubitPrimitive C)}

```

```

{callEnv : RuntimeEnv C} {answer : HSemanticComp D_0 j_0}
(hc : s.control = .term (.app (.lam x (.lam y body)) arg1))
(hs : s.stack = [.argument arg2 callEnv])
(hnoapp : NoApp body)
(hadmin1 : AdminNoApp arg1) (hadmin2 : AdminNoApp arg2)
(hscoped : ChannelConfig.WellScoped s)
(hrel : ChannelConfigRel D_0 j_0 realize s answer) :
PresentedChannelConfigCompleteness D_0 j_0 realize s answer := by
have hsApp :
  {s with control := .term (.app (.lam x (.lam y body)) arg1)} =
  s :=
  ChannelConfig.ext hc.symm rfl rfl rfl
have hrelApp : ChannelConfigRel D_0 j_0 realize
  {s with control := .term (.app (.lam x (.lam y body)) arg1)}
  answer :=
  hsApp.symm |> hrel
have hrelLam :=
  channel_config_application D_0 j_0 (s := s)
  (fn := .lam x (.lam y body)) (arg := arg1) hrelApp
have hrelClo :=
  channel_config_lambda D_0 j_0
  (s := {s with stack := .argument arg1 s.env :: s.stack})
  hrelLam
have hrelArg :=
  channel_config_evaluateArgument D_0 j_0
  (s :=
    {s with
      control := .value (.closure x (.lam y body) s.env)
      stack := .argument arg1 s.env :: s.stack})
  (fn := .closure x (.lam y body) s.env) (arg := arg1)
  (callEnv := s.env) (rest := s.stack) hrelClo
let sArg : ChannelConfig C :=
  {s with
    control := .term arg1
    stack :=
      .function (.closure x (.lam y body) s.env) :: s.stack}
have hstepApp : ChannelInternalStep s
  {s with
    control := .term (.lam x (.lam y body))
    stack := .argument arg1 s.env :: s.stack} := by
have happ :
  ChannelInternalStep
  {s with
    control := .term (.app (.lam x (.lam y body)) arg1)}
  {s with
    control := .term (.lam x (.lam y body))
    stack := .argument arg1 s.env :: s.stack} :=
  ChannelInternalStep.application (s := s)
  (fn := .lam x (.lam y body)) (arg := arg1)
exact hsApp.symm |> happ
have hstepLam : ChannelInternalStep
  {s with
    control := .term (.lam x (.lam y body))
    stack := .argument arg1 s.env :: s.stack}
  {s with
    control := .value (.closure x (.lam y body) s.env)
    stack := .argument arg1 s.env :: s.stack} :=
  ChannelInternalStep.lambda
  (s := {s with stack := .argument arg1 s.env :: s.stack})
  (x := x) (body := .lam y body)
have hstepArg : ChannelInternalStep
  {s with
    control := .value (.closure x (.lam y body) s.env)

```

```

      stack := .argument arg1 s.env :: s.stack}
    sArg :=
ChannelInternalStep.evaluateArgument
(s :=
  {s with
    control := .value (.closure x (.lam y body) s.env)
    stack := .argument arg1 s.env :: s.stack}}
  (fn := .closure x (.lam y body) s.env) (arg := arg1)
  (callEnv := s.env) (rest := s.stack))
have hscopedArg : ChannelConfig.WellScoped sArg :=
  ChannelInternalStep.preserve_wellScoped hstepArg
  (ChannelInternalStep.preserve_wellScoped hstepLam
    (ChannelInternalStep.preserve_wellScoped hstepApp hscoped))
have hsArg :
  sArg.stack =
    [.function (.closure x (.lam y body) s.env),
     .argument arg2 callEnv] := by
  simp [sArg, hs]
have harg :
  PresentedChannelConfigCompleteness D_0 j_0 realize sArg answer :=
admin_noapp_under_function_argument_nil_presentedChannelConfigCompleteness
D_0 j_0 realize (s := sArg) (code := arg1) (x := x) (y := y)
(body := body) (arg2 := arg2) (cloX := s.env)
(callEnv := callEnv) hadmin1 rfl hsArg hnoapp hadmin2
hscopedArg
(by
  change ChannelConfigRel D_0 j_0 realize
    {s with
      control := .term arg1
      env := s.env
      stack :=
        .function (.closure x (.lam y body) s.env) ::
          s.stack}
    -
    exact hrelArg)
exact stacked_lam_app_presentedChannelConfigCompleteness D_0 j_0 realize
(s := s) (x := x) (body := .lam y body) (arg := arg1) hc hrel harg

/-- Closed curried `app (app (lam x (lam y body)) arg1) arg2`. -/
theorem closed_app_app_lam_lam_admin_noapp_presented_channelTreeCompleteness
{C : Type}
(D_0 : QDomain.{0})
(j_0 : IsContinuousLatticeProjection D_0.carrier
  (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
(realize : C -> HSemanticValue D_0 j_0)
(x y : Name) (body arg1 arg2 : Term (QubitPrimitive C))
(hclosed : Closed
  (.app (.app (.lam x (.lam y body)) arg1) arg2))
(hnoapp : NoApp body)
(hadmin1 : AdminNoApp arg1) (hadmin2 : AdminNoApp arg2)
(quantum : NormalizedDensity 2)
(semanticEnv : Env (HSemanticValue D_0 j_0)) :
PresentedChannelTreeCompleteness D_0 j_0 realize
  (initialChannelConfig
    (.app (.app (.lam x (.lam y body)) arg1) arg2) quantum)
  (interp (hardwarePrimitive D_0 j_0 realize)
    (.app (.app (.lam x (.lam y body)) arg1) arg2)
    semanticEnv) := by
let inner : Term (QubitPrimitive C) :=
  .app (.lam x (.lam y body)) arg1
let code : Term (QubitPrimitive C) := .app inner arg2
let s : ChannelConfig C := initialChannelConfig code quantum
have hc : s.control = .term code := rfl

```

```

have hrel :=
  initialChannelConfig_related D_0 j_0 realize code quantum semanticEnv
have hscoped :=
  initialChannelConfig_wellScoped hclosed quantum
have hsApp :
  {s with control := .term (.app inner arg2)} = s :=
  ChannelConfig.ext hc.symm rfl rfl rfl
have hrelApp : ChannelConfigRel D_0 j_0 realize
  {s with control := .term (.app inner arg2)}
  (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv) :=
  hsApp.symm |> hrel
have hrelInner :=
  channel_config_application D_0 j_0 (s := s) (fn := inner)
  (arg := arg2) hrelApp
let sInner : ChannelConfig C :=
  {s with
    control := .term inner
    stack := .argument arg2 s.env :: s.stack}
have hstepApp : ChannelInternalStep s sInner := by
  have happ :
    ChannelInternalStep
    {s with control := .term (.app inner arg2)} sInner :=
    ChannelInternalStep.application (s := s) (fn := inner)
    (arg := arg2)
  exact hsApp.symm |> happ
have hscopedInner : ChannelConfig.WellScoped sInner :=
  ChannelInternalStep.preserve_wellScoped hstepApp hscoped
have hsInner : sInner.stack = [.argument arg2 s.env] := by
  simp [sInner, s, initialChannelConfig, ofConfig, initialConfig]
have hinner :
  PresentedChannelConfigCompleteness D_0 j_0 realize sInner
  (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv) :=
  app_lam_lam_under_argument_nil_presentedChannelConfigCompleteness
  D_0 j_0 realize (s := sInner) (x := x) (y := y) (body := body)
  (arg1 := arg1) (arg2 := arg2) (callEnv := s.env) rfl hsInner
  hnoapp hadmin1 hadmin2 hscopedInner
  (by
    change ChannelConfigRel D_0 j_0 realize
    {s with
      control := .term inner
      env := s.env
      stack := .argument arg2 s.env :: s.stack}
    -
    exact hrelInner)
exact (application_presentedChannelConfigCompleteness D_0 j_0 realize
  (s := s) (fn := inner) (arg := arg2) hc hrel hinner).complete

/-- Token adequacy for closed curried
`app (app (lam x (lam y body)) arg1) arg2`. -/
theorem closed_app_app_lam_lam_admin_noapp_presented_token_adequacy
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (x y : Name) (body arg1 arg2 : Term (QubitPrimitive C))
  (hclosed : Closed
    (.app (.app (.lam x (.lam y body)) arg1) arg2))
  (hnoapp : NoApp body)
  (hadmin1 : AdminNoApp arg1) (hadmin2 : AdminNoApp arg2)
  (quantum : NormalizedDensity 2)
  (semanticEnv : Env (HSemanticValue D_0 j_0))
  (selectors : List Bool)

```

```

(? : HSemanticValue D_0 j_0 -> FiniteInstrumentComp 2 PUnit.{1})
(k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2))
(hk : forall d, k d = (? d).satisfiedTTTheory resultCode)
(i : Nat) (token : TTObservationToken 2) :
token in HardwareAdequacy.selectPath selectors
  (interp (hardwarePrimitive D_0 j_0 realize)
    (.app (.app (.lam x (.lam y body)) arg1) arg2)
    semanticEnv) i k <->
exists fuel, exists (tree : ChannelTree C
  (initialChannelConfig
    (.app (.app (.lam x (.lam y body)) arg1) arg2) quantum))
  (R : ChannelTreeRealization D_0 j_0 realize tree),
tree.depth <= fuel /\
ResultAvailable tree selectors i /\
TTObservationToken.Holds resultCode token
  ((restrictedInstrument D_0 j_0 realize tree R selectors i).bind
    ?) :=
presented_channel_tree_token_adequacy_iff D_0 j_0 realize
  (initialChannelConfig
    (.app (.app (.lam x (.lam y body)) arg1) arg2) quantum)
  (interp (hardwarePrimitive D_0 j_0 realize)
    (.app (.app (.lam x (.lam y body)) arg1) arg2) semanticEnv)
  (closed_app_app_lam_lam_admin_noapp_presented_channelTreeCompleteness
    D_0 j_0 realize x y body arg1 arg2 hclosed hnoapp hadmin1 hadmin2
    quantum semanticEnv)
  selectors ? k hk i token

/-- Value completeness under one function frame over leftover argument
frames of a fixed list. -/
def ValueUnderFunctionArgumentFrames {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)

```

Lean 4 source (lines 9601–9943)

```

(frames : List (Term (QubitPrimitive C) x RuntimeEnv C)) : Prop :=
forall {s : ChannelConfig C} {arg : RuntimeValue C} {x : Name}
{body : Term (QubitPrimitive C)} {cloX : RuntimeEnv C}
{answer : HSemanticComp D_0 j_0},
s.control = .value arg ->
s.stack =
  .function (.closure x body cloX) :: argumentStack frames ->
BodyUnderArgs frames.length body ->
ChannelConfig.WellScoped s ->
ChannelConfigRel D_0 j_0 realize s answer ->
PresentedChannelConfigCompleteness D_0 j_0 realize s answer

/-- Pauli-X under a function frame over leftover argument frames,
given value completeness at that stack. -/
theorem pauliX_under_function_argument_frames_of_value
{C : Type}
(D_0 : QDomain.{0})
(j_0 : IsContinuousLatticeProjection D_0.carrier
  (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
(realize : C -> HSemanticValue D_0 j_0)
(frames : List (Term (QubitPrimitive C) x RuntimeEnv C))
(hVal : ValueUnderFunctionArgumentFrames D_0 j_0 realize frames)
{s : ChannelConfig C} {value : C} {x : Name}
{body : Term (QubitPrimitive C)} {cloX : RuntimeEnv C}
{answer : HSemanticComp D_0 j_0}
(hc : s.control = .term (.prim (.pauliX value)))
(hs : s.stack =

```



```

    .function (.closure x body cloX) :: argumentStack frames)
(hbody : BodyUnderArgs frames.length body)
(hscoped : ChannelConfig.WellScoped s)
(hrel : ChannelConfigRel D_0 j_0 realize s answer) :
PresentedChannelConfigCompleteness D_0 j_0 realize s answer := by
have hsPx :
  {s with control := .term (.prim (.pauliX value))} = s :=
  ChannelConfig.ext hc.symm rfl rfl rfl
obtain <semanticEnv, kStack, henv, hstack, rfl> :=
  channelConfigRel_term_inv D_0 j_0 hc hrel
let sVal : ChannelConfig C :=
  {s with
    control := .value (.payload value)
    quantum := applyOperation Qubit.pauliXOp s.quantum}
have hstep : ChannelInternalStep s sVal := by
  have happ :
    ChannelInternalStep
      {s with control := .term (.prim (.pauliX value))}
      sVal :=
    ChannelInternalStep.pauliXPrimitive (s := s) (value := value)
  exact hsPx.symm |> happ
have hscopedVal : ChannelConfig.WellScoped sVal :=
  ChannelInternalStep.preserve_wellScoped hstep hscoped
have hrelVal : ChannelConfigRel D_0 j_0 realize sVal
  (kStack
    (semanticUnit (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0) (realize value))) :=
  <semanticUnit (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0) (realize value),
    kStack,
    ControlRel.value _ _ s.env
    (payload_related D_0 j_0 realize value),
    hstack, rfl>
have hval :=
  hVal (s := sVal) (arg := .payload value) (x := x) (body := body)
  (cloX := cloX) rfl hs hbody hscopedVal hrelVal
refine
  { related := hrel
    complete := ?_ }
constructor
intro selectors i ? k? hk
have hchildEq :=
  hval.complete.selected_result_eq_channelTree_sup_presented
  selectors i ? k? hk
have hden :
  interp (hardwarePrimitive D_0 j_0 realize)
    (.prim (.pauliX value)) semanticEnv =
  taggedEmbed
    (FiniteInstrumentComp.ofOperation Qubit.pauliXOp
      (realize value)) := by
  simp [hardwarePrimitive_pauliX]
have hne : s.stack != [] := by
  rw [hs]
  exact List.cons_ne_nil _ _
let unitVal : HSemanticComp D_0 j_0 :=
  semanticUnit (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0) (realize value)
let opVal : HSemanticComp D_0 j_0 :=
  taggedEmbed
    (FiniteInstrumentComp.ofOperation Qubit.pauliXOp
      (realize value))
have hchildCoord :
  kStack unitVal (HardwareAdequacy.encodePath selectors i) k? =

```

```

      sSup (channelTreeResults D_0 j_0 realize sVal selectors i
        k?) := by
have hsel :
  HardwareAdequacy.selectPath selectors (kStack unitVal) i k? =
    kStack unitVal (HardwareAdequacy.encodePath selectors i)
    k? :=
  congrArg (fun f => f k?)
    (HardwareAdequacy.selectPath_apply_encode selectors
      (kStack unitVal) i)
exact hsel.symm.trans hchildEq
have hselParent :
  HardwareAdequacy.selectPath selectors (kStack opVal) i k? =
    kStack opVal (HardwareAdequacy.encodePath selectors i) k? :=
  congrArg (fun f => f k?)
    (HardwareAdequacy.selectPath_apply_encode selectors
      (kStack opVal) i)
have hop :
  kStack opVal (HardwareAdequacy.encodePath selectors i) k? =
    embed (FiniteInstrumentComp.ofOperation Qubit.pauliXOp
      (realize value))
      (ScottMap.const
        (kStack unitVal (HardwareAdequacy.encodePath selectors i)
          k?)) :=
  stackRel_ofOperation_eval D_0 j_0 hstack hne
    Qubit.pauliXOp (realize value)
    (HardwareAdequacy.encodePath selectors i) k?
rw [hden, hselParent, hop, hchildCoord, embed_ofOperation_const_sSup]
apply le_antisymm
* apply sSup_le
  rintro T <r, <fuel, child, R, hdepth, rfl>, rfl>
  apply le_sSup
  refine <fuel + 1, ChannelTree.internal hstep child,
    wrapInternalRealization D_0 j_0 realize hstep child R, ?_, ?_>
  * change child.depth + 1 <= fuel + 1
  omega
  * exact
    (restrictedResult_internal_pauliX D_0 j_0 realize hstep hc
      child
      (wrapInternalRealization D_0 j_0 realize hstep child R)
      selectors i ? k? hk).symm
* apply sSup_le
  rintro T <_, tree, R, _, rfl>
  cases tree with
  | terminal hterm =>
    cases hterm.control_eq.symm.trans hc
  | @internal _ t' h next =>
    have ht : t' = sVal :=
      ChannelInternalStep.eq_config_of_pauliX h hc
    subst t'
    rw [restrictedResult_internal_pauliX D_0 j_0 realize h hc
      next R selectors i ? k? hk]
    apply le_sSup
    refine <restrictedResult D_0 j_0 realize next
      (internalChildRealization D_0 j_0 realize h next R)
      selectors i k?,
      <next.depth, next,
        internalChildRealization D_0 j_0 realize h next R,
        le_rfl, rfl>, rfl>
  | external _ hex _ =>
    exact False.elim (ChannelExternalStep.not_prim hex hc)
  | probability _ _ _ =>
    cases hc
  | probabilityZero _ =>

```

```

      cases hc
    | probabilityOne _ =>
      cases hc
    | measurement _ _ =>
      cases hc

/-- Administrative NoApp under a function frame over leftover argument
frames, given value completeness at that stack. -/
theorem admin_noapp_under_function_argument_frames_of_value
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (frames : List (Term (QubitPrimitive C) x RuntimeEnv C))
  (hVal : ValueUnderFunctionArgumentFrames D_0 j_0 realize frames)
  {s : ChannelConfig C} {code : Term (QubitPrimitive C)}
  {x : Name} {body : Term (QubitPrimitive C)} {cloX : RuntimeEnv C}
  {answer : HSemanticComp D_0 j_0}
  (hadmin : AdminNoApp code)
  (hc : s.control = .term code)
  (hs : s.stack =
    .function (.closure x body cloX) :: argumentStack frames)
  (hbody : BodyUnderArgs frames.length body)
  (hscoped : ChannelConfig.WellScoped s)
  (hrel : ChannelConfigRel D_0 j_0 realize s answer) :
  PresentedChannelConfigCompleteness D_0 j_0 realize s answer := by
induction code generalizing s answer with
| var z =>
  have hctl := hscoped.left
  rw [hc] at hctl
  obtain <v, hlookup> := hctl.right z (by simp [free])
  have hsVar :
    {s with control := .term (.var z)} = s :=
    ChannelConfig.ext hc.symm rfl rfl rfl
  have hrelVar : ChannelConfigRel D_0 j_0 realize
    {s with control := .term (.var z)} answer :=
    hsVar.symm |> hrel
  have hrelVal :=
    channel_config_variable D_0 j_0 hlookup hrelVar
  have hscopedVal : ChannelConfig.WellScoped
    {s with control := .value v} :=
    <<hctl.left, hctl.left z v hlookup>, hscoped.right>
  have hval :=
    hVal (s := {s with control := .value v}) (arg := v)
    (x := x) (body := body) (cloX := cloX)
    rfl hs hbody hscopedVal hrelVal
  exact variable_presentedChannelConfigCompleteness D_0 j_0 realize
    hc hlookup hrel hval
| app _ _ =>
  exact False.elim hadmin
| lam z M _ih =>
  have hsLam :
    {s with control := .term (.lam z M)} = s :=
    ChannelConfig.ext hc.symm rfl rfl rfl
  have hrelLam : ChannelConfigRel D_0 j_0 realize
    {s with control := .term (.lam z M)} answer :=
    hsLam.symm |> hrel
  have hrelVal :=
    channel_config_lambda D_0 j_0 (s := s) hrelLam
  have hstepLam : ChannelInternalStep s
    {s with control := .value (.closure z M s.env)} := by
  have happ :

```

```

    ChannelInternalStep
      {s with control := .term (.lam z M)}
      {s with control := .value (.closure z M s.env)} :=
    ChannelInternalStep.lambda (s := s) (x := z) (body := M)
  exact hslam.symm |> happ
  have hscopedVal : ChannelConfig.WellScoped
    {s with control := .value (.closure z M s.env)} :=
    ChannelInternalStep.preserve_wellScoped hstepLam hscoped
  have hval :=
    hVal (s := {s with control := .value (.closure z M s.env)})
      (arg := .closure z M s.env) (x := x) (body := body)
      (cloX := cloX) rfl hs hbody hscopedVal hrelVal
  exact lambda_presentedChannelConfigCompleteness D_0 j_0 realize
    hc hrel hval
| recLam self z M _ih =>
  have hsRec :
    {s with control := .term (.recLam self z M)} = s :=
    ChannelConfig.ext hc.symm rfl rfl rfl
  have hrelRec : ChannelConfigRel D_0 j_0 realize
    {s with control := .term (.recLam self z M)} answer :=
    hsRec.symm |> hrel
  have hrelVal :=
    channel_config_recursive D_0 j_0 (s := s) hrelRec
  have hstepRec : ChannelInternalStep s
    {s with control := .value (.recClosure self z M s.env)} := by
  have happ :
    ChannelInternalStep
      {s with control := .term (.recLam self z M)}
      {s with
        control := .value (.recClosure self z M s.env)} :=
    ChannelInternalStep.recursive (s := s) (self := self)
      (arg := z) (body := M)
  exact hsRec.symm |> happ
  have hscopedVal : ChannelConfig.WellScoped
    {s with control := .value (.recClosure self z M s.env)} :=
    ChannelInternalStep.preserve_wellScoped hstepRec hscoped
  have hval :=
    hVal
      (s :=
        {s with control := .value (.recClosure self z M s.env)})
      (arg := .recClosure self z M s.env) (x := x) (body := body)
      (cloX := cloX) rfl hs hbody hscopedVal hrelVal
  exact recLam_presentedChannelConfigCompleteness D_0 j_0 realize
    hc hrel hval
| intern left right ihL ihR =>
  have <hnaL, hnaR> := hadmin
  have hscopedL :=
    wellScoped_term_child (child := left) hc hscoped
    (fun z hz => by simp [free, hz])
  have hscopedR :=
    wellScoped_term_child (child := right) hc hscoped
    (fun z hz => by simp [free, hz])
  refine intern_related_presentedChannelConfigCompleteness
    D_0 j_0 realize hc hrel ?_ ?_
  * intro semanticEnv k henv hstack
    exact ihL hnaL (s := {s with control := .term left}) rfl hs
      hscopedL
      <interp (hardwarePrimitive D_0 j_0 realize) left semanticEnv, k,
        ControlRel.term left s.env semanticEnv henv, hstack, rfl>
  * intro semanticEnv k henv hstack
    exact ihR hnaR (s := {s with control := .term right}) rfl hs
      hscopedR
      <interp (hardwarePrimitive D_0 j_0 realize) right semanticEnv, k,

```

```

      ControlRel.term right s.env semanticEnv henv, hstack, rfl>
| extern _ _ _ =>
  exact False.elim hadmin
| prob p left right ihL ihR =>
  have <hnaL, hnaR> := hadmin
  have hscopedL :=
    wellScoped_term_child (child := left) hc hscoped
    (fun z hz => by simp [free, hz])
  have hscopedR :=
    wellScoped_term_child (child := right) hc hscoped
    (fun z hz => by simp [free, hz])
  refine prob_related_presentedChannelConfigCompleteness
    D_0 j_0 realize hc hrel ?_ ?_
  * intro semanticEnv k quantum henv hstack
    exact ihL hnaL
    (s := {s with control := .term left, quantum := quantum})
    rfl hs <hscopedL.left, hscopedL.right>
    <interp (hardwarePrimitive D_0 j_0 realize) left semanticEnv, k,
      ControlRel.term left s.env semanticEnv henv, hstack, rfl>
  * intro semanticEnv k quantum henv hstack
    exact ihR hnaR
    (s := {s with control := .term right, quantum := quantum})
    rfl hs <hscopedR.left, hscopedR.right>
    <interp (hardwarePrimitive D_0 j_0 realize) right semanticEnv, k,
      ControlRel.term right s.env semanticEnv henv, hstack, rfl>
| prim prim =>
  cases prim with
| ret value =>
  have hsRet :
    {s with control := .term (.prim (.ret value))} = s :=
    ChannelConfig.ext hc.symm rfl rfl rfl
  have hrelRet : ChannelConfigRel D_0 j_0 realize
    {s with control := .term (.prim (.ret value))} answer :=
    hsRet.symm |> hrel
  have hrelVal :=
    channel_config_return D_0 j_0 hrelRet
  have hstepRet : ChannelInternalStep s
    {s with control := .value (.payload value)} := by
  have happ :
    ChannelInternalStep
    {s with control := .term (.prim (.ret value))}
    {s with control := .value (.payload value)} :=
    ChannelInternalStep.returnPrimitive (s := s)
    (value := value)
  exact hsRet.symm |> happ
  have hscopedVal : ChannelConfig.WellScoped
    {s with control := .value (.payload value)} :=
    ChannelInternalStep.preserve_wellScoped hstepRet hscoped
  have hval :=
    hVal (s := {s with control := .value (.payload value)})
    (arg := .payload value) (x := x) (body := body)
    (cloX := cloX) rfl hs hbody hscopedVal hrelVal
  exact return_presentedChannelConfigCompleteness D_0 j_0 realize
    hc hrel hval
| pauliX value =>
  exact
    pauliX_under_function_argument_frames_of_value
      D_0 j_0 realize frames hVal hc hs hbody hscoped hrel
| measureZ _ _ =>
  exact False.elim hadmin

```

end HardwareChannelSemantics

end QLambda

A.26 QLambda/HardwareChannel/UnderFrame.lean

6414 lines.

Lean 4 source (lines 1–400)

```
/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/
import QLambda.HardwareChannel.Spines

/-!
# Under-frame completeness and closed special cases

Layer of the hardware channel-tree semantics. All layers share the
`QLambda.HardwareChannelSemantics` namespace; import
`QLambda.HardwareChannelSemantics` for the full module.
-/

set_option maxHeartbeats 800000

namespace QLambda
namespace HardwareChannelSemantics

open Matrix
open scoped ComplexOrder MatrixOrder

open HardwareOperational
open HardwareObservation
open HardwareAdequacy
open HardwareLogicalRelation
open TTPhysicalPrimitives
open TTPhysicalEmbedding
open TTContinuation
open Scott1972.ContinuousLattice

/-- List-of-frames completeness: a lambda under leftover argument
frames, a value under the corresponding function frame, and
administrative NoApp at that same function frame. -/
theorem argument_spine_presented
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEnternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (frames : List (Term (QubitPrimitive C) x RuntimeEnv C))
  (hok : forall p in frames, AdminNoApp p.1) :
  (forall {s : ChannelConfig C} {x : Name}
    {body : Term (QubitPrimitive C)} {answer : HSemanticComp D_0 j_0},
    s.control = .term (.lam x body) ->
    s.stack = argumentStack frames ->
    LamAbsorbs frames.length body ->
    ChannelConfig.WellScoped s ->
    ChannelConfigRel D_0 j_0 realize s answer ->
    PresentedChannelConfigCompleteness D_0 j_0 realize s answer)
  /\
  ValueUnderFunctionArgumentFrames D_0 j_0 realize frames
  /\
  (forall {s : ChannelConfig C} {code : Term (QubitPrimitive C)}
```

```

    {x : Name} {body : Term (QubitPrimitive C)}
    {cloX : RuntimeEnv C} {answer : HSemanticComp D_0 j_0},
AdminNoApp code ->
s.control = .term code ->
s.stack =
  .function (.closure x body cloX) :: argumentStack frames ->
BodyUnderArgs frames.length body ->
ChannelConfig.WellScoped s ->
ChannelConfigRel D_0 j_0 realize s answer ->
PresentedChannelConfigCompleteness D_0 j_0 realize s answer) := by
induction frames with
| nil =>
  refine <?hlam, ?hval, ?hadmin>
  * intro s x body answer hc hs _habs hscoped hrel
    obtain <semanticEnv, k, henv, hstack, heq> :=
      channelConfigRel_term_inv D_0 j_0 hc hrel
    rw [hs] at hstack
    cases hstack
    exact
      { related := hrel
        complete :=
          PresentedChannelTreeCompleteness.congr rfl heq.symm
            (lam_terminal_presentedChannelTreeCompleteness
              D_0 j_0 realize hc (by simp using hs) hscoped
                henv) }
  * intro s arg x body cloX answer hc hs hbody hscoped hrel
    have hs' : s.stack = [.function (.closure x body cloX)] := by
      simp [argumentStack] using hs
    exact
      value_under_closure_nil_presentedChannelConfigCompleteness
        D_0 j_0 realize hc hs' (BodyUnderArgs_zero.mp hbody)
        hscoped hrel
  * intro s code x body cloX answer hadmin hc hs hbody hscoped
    hrel
    have hs' : s.stack = [.function (.closure x body cloX)] := by
      simp [argumentStack] using hs
    exact
      admin_noapp_under_closure_nil_presentedChannelConfigCompleteness
        D_0 j_0 realize hadmin hc hs' (BodyUnderArgs_zero.mp hbody)
        hscoped hrel
| cons p rest ih =>
  rcases p with <arg, callEnv>
  have hadminArg : AdminNoApp arg :=
    hok (arg, callEnv) (by simp)
  have hokRest : forall q in rest, AdminNoApp q.1 :=
    fun q hq => hok q (by simp [hq])
  obtain <ihLam, ihVal, ihAdmin> := ih hokRest
  have hlam :
    forall {s : ChannelConfig C} {x : Name}
      {body : Term (QubitPrimitive C)}
      {answer : HSemanticComp D_0 j_0},
    s.control = .term (.lam x body) ->
    s.stack = argumentStack ((arg, callEnv) :: rest) ->
    LamAbsorbs ((arg, callEnv) :: rest).length body ->
    ChannelConfig.WellScoped s ->
    ChannelConfigRel D_0 j_0 realize s answer ->
    PresentedChannelConfigCompleteness D_0 j_0 realize s
      answer := by
    intro s x body answer hc hs habs hscoped hrel
    have hsLam :
      {s with control := .term (.lam x body)} = s :=
      ChannelConfig.ext hc.symm rfl rfl rfl
    have hrelLam : ChannelConfigRel D_0 j_0 realize

```

```

    {s with control := .term (.lam x body)} answer :=
  hsLam.symm |> hrel
have hrelClo :=
  channel_config_lambda D_0 j_0 (s := s) hrelLam
have hsrcClo :
  {s with control := .value (.closure x body s.env)} =
  {s with
    control := .value (.closure x body s.env)
    stack :=
      .argument arg callEnv :: argumentStack rest} :=
  ChannelConfig.ext rfl rfl hs rfl
have hrelFn :=
  channel_config_evaluateArgument D_0 j_0
  (s := {s with control := .value (.closure x body s.env)})
  (fn := .closure x body s.env) (arg := arg)
  (callEnv := callEnv) (rest := argumentStack rest)
  (hsrcClo |> hrelClo)
have hstepLam : ChannelInternalStep s
  {s with control := .value (.closure x body s.env)} := by
  have happ :
    ChannelInternalStep
      {s with control := .term (.lam x body)}
      {s with control := .value (.closure x body s.env)} :=
    ChannelInternalStep.lambda (s := s) (x := x) (body := body)
  exact hsLam.symm |> happ
have hstepArg : ChannelInternalStep
  {s with control := .value (.closure x body s.env)}
  {s with
    control := .term arg
    env := callEnv
    stack :=
      .function (.closure x body s.env) ::
        argumentStack rest} := by
  have happ :
    ChannelInternalStep
      {s with
        control := .value (.closure x body s.env)
        stack :=
          .argument arg callEnv :: argumentStack rest}
      {s with
        control := .term arg
        env := callEnv
        stack :=
          .function (.closure x body s.env) ::
            argumentStack rest} :=
    ChannelInternalStep.evaluateArgument
      (s := {s with control := .value (.closure x body s.env)})
      (fn := .closure x body s.env) (arg := arg)
      (callEnv := callEnv) (rest := argumentStack rest)
  exact hsrcClo.symm |> happ
have hscopedFn : ChannelConfig.WellScoped
  {s with
    control := .term arg
    env := callEnv
    stack :=
      .function (.closure x body s.env) ::
        argumentStack rest} :=
  ChannelInternalStep.preserve_wellScoped hstepArg
  (ChannelInternalStep.preserve_wellScoped hstepLam hscoped)
have hbodyRest : BodyUnderArgs rest.length body := by
  simpa [LamAbsorbs] using habs
have harg :
  PresentedChannelConfigCompleteness D_0 j_0 realize

```



```

    {s with
      control := .term arg
      env := callEnv
      stack :=
        .function (.closure x body s.env) ::
          argumentStack rest}
    answer :=
ihAdmin hadminArg rfl rfl hbodyRest hscopedFn hrelFn
have hClo :=
  evaluateArgument_presentedChannelConfigCompleteness
    D_0 j_0 realize
    (s := {s with control := .value (.closure x body s.env)})
    (fn := .closure x body s.env) (arg := arg)
    (callEnv := callEnv) (rest := argumentStack rest)
    rfl hs hrelClo harg
exact lambda_presentedChannelConfigCompleteness D_0 j_0 realize
  hc hrel hClo
have hval : ValueUnderFunctionArgumentFrames D_0 j_0 realize
  ((arg, callEnv) :: rest) := by
intro s v x body cloX answer hc hs hbody hscoped hrel
obtain <y, body', rfl, hbody'> :=
  BodyUnderArgs_succ_inv (n := rest.length) hbody
have hEq :
  {s with
    control := .value v
    stack :=
      .function (.closure x (.lam y body') cloX) ::
        argumentStack ((arg, callEnv) :: rest)} = s :=
  ChannelConfig.ext hc.symm rfl hs.symm rfl
have hrel' : ChannelConfigRel D_0 j_0 realize
  {s with
    control := .value v
    stack :=
      .function (.closure x (.lam y body') cloX) ::
        argumentStack ((arg, callEnv) :: rest)}
  answer :=
  hEq.symm |> hrel
have hrelBody :=
  channel_config_beta D_0 j_0 (s := s) (x := x)
  (body := .lam y body') (closureEnv := cloX) (arg := v)
  (rest := argumentStack ((arg, callEnv) :: rest)) hrel'
let sBody : ChannelConfig C :=
  {s with
    control := .term (.lam y body')
    env := RuntimeEnv.bind x v cloX
    stack := argumentStack ((arg, callEnv) :: rest)}
have hstepBeta : ChannelInternalStep s sBody := by
  have happ :
    ChannelInternalStep
      {s with
        control := .value v
        stack :=
          .function (.closure x (.lam y body') cloX) ::
            argumentStack ((arg, callEnv) :: rest)}
      sBody :=
    ChannelInternalStep.beta (s := s) (x := x)
    (body := .lam y body') (closureEnv := cloX) (arg := v)
    (rest := argumentStack ((arg, callEnv) :: rest))
  exact hEq.symm |> happ
have hscopedBody : ChannelConfig.WellScoped sBody :=
  ChannelInternalStep.preserve_wellScoped hstepBeta hscoped
have habs : LamAbsorbs ((arg, callEnv) :: rest).length body' :=
  hbody'

```

```

have hchild :=
  hlam (s := sBody) (x := y) (body := body') rfl rfl habs
  hscopedBody hrelBody
exact beta_presentedChannelConfigCompleteness D_0 j_0 realize
  (s := s) (x := x) (body := .lam y body')
  (closureEnv := cloX) (arg := v)
  (rest := argumentStack ((arg, callEnv) :: rest))
  hc hs hrel hchild
exact <hlam, hval,
  fun {s} {code} {x} {body} {cloX} {answer} =>
    admin_noapp_under_function_argument_frames_of_value
      D_0 j_0 realize ((arg, callEnv) :: rest) hval>

theorem lam_under_argument_frames_presentedChannelConfigCompleteness
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (frames : List (Term (QubitPrimitive C) x RuntimeEnv C))
  (hok : forall p in frames, AdminNoApp p.1)
  {s : ChannelConfig C} {x : Name}
  {body : Term (QubitPrimitive C)} {answer : HSemanticComp D_0 j_0}
  (hc : s.control = .term (.lam x body))
  (hs : s.stack = argumentStack frames)
  (habs : LamAbsorbs frames.length body)
  (hscoped : ChannelConfig.WellScoped s)
  (hrel : ChannelConfigRel D_0 j_0 realize s answer) :
  PresentedChannelConfigCompleteness D_0 j_0 realize s answer :=
  (argument_spine_presented D_0 j_0 realize frames hok).1
  hc hs habs hscoped hrel

theorem value_under_function_argument_frames_presentedChannelConfigCompleteness
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (frames : List (Term (QubitPrimitive C) x RuntimeEnv C))
  (hok : forall p in frames, AdminNoApp p.1)
  {s : ChannelConfig C} {arg : RuntimeValue C} {x : Name}
  {body : Term (QubitPrimitive C)} {cloX : RuntimeEnv C}
  {answer : HSemanticComp D_0 j_0}
  (hc : s.control = .value arg)
  (hs : s.stack =
    .function (.closure x body cloX) :: argumentStack frames)
  (hbody : BodyUnderArgs frames.length body)
  (hscoped : ChannelConfig.WellScoped s)
  (hrel : ChannelConfigRel D_0 j_0 realize s answer) :
  PresentedChannelConfigCompleteness D_0 j_0 realize s answer :=
  (argument_spine_presented D_0 j_0 realize frames hok).2.1
  hc hs hbody hscoped hrel

theorem admin_noapp_under_function_argument_frames_presentedChannelConfigCompleteness
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (frames : List (Term (QubitPrimitive C) x RuntimeEnv C))
  (hok : forall p in frames, AdminNoApp p.1)
  {s : ChannelConfig C} {code : Term (QubitPrimitive C)}
  {x : Name} {body : Term (QubitPrimitive C)} {cloX : RuntimeEnv C}

```

```

{answer : HSemanticComp D_0 j_0}
(hadmin : AdminNoApp code)
(hc : s.control = .term code)
(hs : s.stack =
  .function (.closure x body cloX) :: argumentStack frames)
(hbody : BodyUnderArgs frames.length body)
(hscoped : ChannelConfig.WellScoped s)
(hrel : ChannelConfigRel D_0 j_0 realize s answer) :
PresentedChannelConfigCompleteness D_0 j_0 realize s answer :=
(argument_spine_presented D_0 j_0 realize frames hok).2.2
hadmin hc hs hbody hscoped hrel

/-- Inner `app (lam x body) arg` under leftover argument frames. -/
theorem app_lam_under_argument_frames_presentedChannelConfigCompleteness
{C : Type}
(D_0 : QDomain.{0})
(j_0 : IsContinuousLatticeProjection D_0.carrier
  (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
(realize : C -> HSemanticValue D_0 j_0)
(frames : List (Term (QubitPrimitive C) x RuntimeEnv C))
(hok : forall p in frames, AdminNoApp p.1)
{s : ChannelConfig C} {x : Name}
{body arg : Term (QubitPrimitive C)} {answer : HSemanticComp D_0 j_0}
(hc : s.control = .term (.app (.lam x body) arg))
(hs : s.stack = argumentStack frames)
(hadminArg : AdminNoApp arg)
(hbody : BodyUnderArgs frames.length body)
(hscoped : ChannelConfig.WellScoped s)
(hrel : ChannelConfigRel D_0 j_0 realize s answer) :
PresentedChannelConfigCompleteness D_0 j_0 realize s answer := by
have hsApp :
  {s with control := .term (.app (.lam x body) arg)} = s :=
  ChannelConfig.ext hc.symm rfl rfl rfl
have hrelApp : ChannelConfigRel D_0 j_0 realize
  {s with control := .term (.app (.lam x body) arg)} answer :=
  hsApp.symm |> hrel
have hrelLam :=
  channel_config_application D_0 j_0 (s := s) (fn := .lam x body)
  (arg := arg) hrelApp
have hrelClo :=
  channel_config_lambda D_0 j_0
  (s := {s with stack := .argument arg s.env :: s.stack})
  hrelLam
have hrelArg :=
  channel_config_evaluateArgument D_0 j_0
  (s :=
    {s with
      control := .value (.closure x body s.env)
      stack := .argument arg s.env :: s.stack})
  (fn := .closure x body s.env) (arg := arg)
  (callEnv := s.env) (rest := s.stack) hrelClo
let sArg : ChannelConfig C :=
  {s with
    control := .term arg
    stack := .function (.closure x body s.env) :: s.stack}
have hstepApp : ChannelInternalStep s
  {s with
    control := .term (.lam x body)
    stack := .argument arg s.env :: s.stack} := by
have happ :
  ChannelInternalStep
  {s with control := .term (.app (.lam x body) arg)}
  {s with

```

```

        control := .term (.lam x body)
        stack := .argument arg s.env :: s.stack} :=
ChannelInternalStep.application (s := s)
    (fn := .lam x body) (arg := arg)
exact hsApp.symm |> happ
have hstepLam : ChannelInternalStep
{
  {s with
    control := .term (.lam x body)
    stack := .argument arg s.env :: s.stack}
  {s with
    control := .value (.closure x body s.env)
    stack := .argument arg s.env :: s.stack} :=
ChannelInternalStep.lambda
  (s := {s with stack := .argument arg s.env :: s.stack})
  (x := x) (body := body)
}
have hstepArg : ChannelInternalStep
{
  {s with
    control := .value (.closure x body s.env)
    stack := .argument arg s.env :: s.stack}
  sArg :=
ChannelInternalStep.evaluateArgument
  (s :=
    {s with
      control := .value (.closure x body s.env)
      stack := .argument arg s.env :: s.stack})
  (fn := .closure x body s.env) (arg := arg)
  (callEnv := s.env) (rest := s.stack)
}
have hscopedArg : ChannelConfig.WellScoped sArg :=
ChannelInternalStep.preserve_wellScoped hstepArg
(ChannelInternalStep.preserve_wellScoped hstepLam

```

Lean 4 source (lines 401–800)

```

    (ChannelInternalStep.preserve_wellScoped hstepApp hscoped))
have hsArg :
  sArg.stack =
    .function (.closure x body s.env) :: argumentStack frames := by
simp [sArg, hs]
have harg :
  PresentedChannelConfigCompleteness D_0 j_0 realize sArg answer :=
admin_noapp_under_function_argument_frames_presentedChannelConfigCompleteness
  D_0 j_0 realize frames hok (s := sArg) (code := arg) (x := x)
  (body := body) (cloX := s.env) hadminArg rfl hsArg hbody
hscopedArg
(by
  change ChannelConfigRel D_0 j_0 realize
    {s with
      control := .term arg
      env := s.env
      stack :=
        .function (.closure x body s.env) :: s.stack}
    -
    exact hrelArg)
exact stacked_lam_app_presentedChannelConfigCompleteness D_0 j_0 realize
  (s := s) (x := x) (body := body) (arg := arg) hc hrel harg

/-- Closed triple curried
`app (app (app (lam x (lam y (lam z body)))) arg1) arg2) arg3`. -/
theorem closed_app_app_app_lam_lam_lam_admin_noapp_presented_channelTreeCompleteness
{C : Type}
(D_0 : QDomain.{0})
(j_0 : IsContinuousLatticeProjection D_0.carrier
  (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
(realize : C -> HSemanticValue D_0 j_0)

```

```

(x y z : Name) (body arg1 arg2 arg3 : Term (QubitPrimitive C))
(hclosed : Closed
  (.app (.app (.app (.lam x (.lam y (.lam z body)))) arg1) arg2)
    arg3))
(hnoapp : NoApp body)
(hadmin1 : AdminNoApp arg1) (hadmin2 : AdminNoApp arg2)
(hadmin3 : AdminNoApp arg3)
(quantum : NormalizedDensity 2)
(semanticEnv : Env (HSemanticValue D_0 j_0)) :
PresentedChannelTreeCompleteness D_0 j_0 realize
  (initialChannelConfig
    (.app (.app (.app (.lam x (.lam y (.lam z body)))) arg1) arg2)
      arg3)
    quantum)
  (interp (hardwarePrimitive D_0 j_0 realize)
    (.app (.app (.app (.lam x (.lam y (.lam z body)))) arg1) arg2)
      arg3)
    semanticEnv) := by
let inner2 : Term (QubitPrimitive C) :=
  .app (.app (.lam x (.lam y (.lam z body)))) arg1) arg2
let code : Term (QubitPrimitive C) := .app inner2 arg3
let s : ChannelConfig C := initialChannelConfig code quantum
have hc : s.control = .term code := rfl
have hrel :=
  initialChannelConfig_related D_0 j_0 realize code quantum semanticEnv
have hscoped :=
  initialChannelConfig_wellScoped hclosed quantum
have hsApp :
  {s with control := .term (.app inner2 arg3)} = s :=
  ChannelConfig.ext hc.symm rfl rfl rfl
have hrelApp : ChannelConfigRel D_0 j_0 realize
  {s with control := .term (.app inner2 arg3)}
  (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv) :=
  hsApp.symm |> hrel
have hrelInner :=
  channel_config_application D_0 j_0 (s := s) (fn := inner2)
  (arg := arg3) hrelApp
let sInner : ChannelConfig C :=
  {s with
    control := .term inner2
    stack := .argument arg3 s.env :: s.stack}
have hstepApp : ChannelInternalStep s sInner := by
  have happ :
    ChannelInternalStep
      {s with control := .term (.app inner2 arg3)} sInner :=
    ChannelInternalStep.application (s := s) (fn := inner2)
      (arg := arg3)
  exact hsApp.symm |> happ
have hscopedInner : ChannelConfig.WellScoped sInner :=
  ChannelInternalStep.preserve_wellScoped hstepApp hscoped
have hsInner : sInner.stack = argumentStack [(arg3, s.env)] := by
  simp [sInner, s, initialChannelConfig, ofConfig, initialConfig,
    argumentStack]
let inner1 : Term (QubitPrimitive C) :=
  .app (.lam x (.lam y (.lam z body)))) arg1
have hsApp2 :
  {sInner with control := .term (.app inner1 arg2)} = sInner :=
  ChannelConfig.ext rfl rfl rfl rfl
have hrelApp2 : ChannelConfigRel D_0 j_0 realize
  {sInner with control := .term (.app inner1 arg2)}
  (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv) := by
  change ChannelConfigRel D_0 j_0 realize
  {s with

```

```

        control := .term inner2
        env := s.env
        stack := .argument arg3 s.env :: s.stack}

    -
    exact hrelInner
have hrelInner1 :=
  channel_config_application D_0 j_0 (s := sInner) (fn := inner1)
  (arg := arg2) hrelApp2
let sInner1 : ChannelConfig C :=
  {sInner with
    control := .term inner1
    stack := .argument arg2 sInner.env :: sInner.stack}
have hstepApp2 : ChannelInternalStep sInner sInner1 := by
  have happ :
    ChannelInternalStep
      {sInner with control := .term (.app inner1 arg2)}
      sInner1 :=
    ChannelInternalStep.application (s := sInner) (fn := inner1)
    (arg := arg2)
  exact hsApp2.symm |> happ
have hscopedInner1 : ChannelConfig.WellScoped sInner1 :=
  ChannelInternalStep.preserve_wellScoped hstepApp2 hscopedInner
have hsInner1 :
  sInner1.stack = argumentStack [(arg2, s.env), (arg3, s.env)] := by
  simp [sInner1, sInner, s, initialChannelConfig, ofConfig,
    initialConfig, argumentStack]
have hok : forall p in [(arg2, s.env), (arg3, s.env)], AdminNoApp p.1 := by
  intro p hp
  simp at hp
  rcases hp with h | h <;> cases h <;> assumption
have hbody :
  BodyUnderArgs
    [(arg2, s.env), (arg3, s.env)] : List
    (Term (QubitPrimitive C) x RuntimeEnv C)).length
    (.lam y (.lam z body)) := by
  simpa [BodyUnderArgs] using hnoapp
have hinner1 :
  PresentedChannelConfigCompleteness D_0 j_0 realize sInner1
  (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv) :=
app_lam_under_argument_frames_presentedChannelConfigCompleteness
D_0 j_0 realize [(arg2, s.env), (arg3, s.env)] hok
(s := sInner1) (x := x) (body := .lam y (.lam z body))
(arg := arg1) rfl hsInner1 hadmin1 hbody hscopedInner1
(by
  change ChannelConfigRel D_0 j_0 realize
    {sInner with
      control := .term inner1
      env := sInner.env
      stack := .argument arg2 sInner.env :: sInner.stack}

  -
  exact hrelInner1)
have hinner :
  PresentedChannelConfigCompleteness D_0 j_0 realize sInner
  (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv) :=
application_presentedChannelConfigCompleteness D_0 j_0 realize
(s := sInner) (fn := inner1) (arg := arg2) rfl
(by
  change ChannelConfigRel D_0 j_0 realize
    {s with
      control := .term inner2
      env := s.env
      stack := .argument arg3 s.env :: s.stack}

  -

```

```

    exact hrelInner)
  hinner1
exact (application_presentedChannelConfigCompleteness D_0 j_0 realize
  (s := s) (fn := inner2) (arg := arg3) hc hrel hinner).complete

/-- Token adequacy for closed triple curried
`app (app (app (lam x (lam y (lam z body)))) arg1) arg2) arg3`. -/
theorem closed_app_app_app_lam_lam_lam_admin_noapp_presented_token_adequacy
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (x y z : Name) (body arg1 arg2 arg3 : Term (QubitPrimitive C))
  (hclosed : Closed
    (.app (.app (.app (.lam x (.lam y (.lam z body)))) arg1) arg2)
    arg3))
  (hnoapp : NoApp body)
  (hadmin1 : AdminNoApp arg1) (hadmin2 : AdminNoApp arg2)
  (hadmin3 : AdminNoApp arg3)
  (quantum : NormalizedDensity 2)
  (semanticEnv : Env (HSemanticValue D_0 j_0))
  (selectors : List Bool)
  (? : HSemanticValue D_0 j_0 -> FiniteInstrumentComp 2 PUnit.{1})
  (k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2))
  (hk : forall d, k d = (? d).satisfiedTTTheory resultCode)
  (i : Nat) (token : TTObservationToken 2) :
token in HardwareAdequacy.selectPath selectors
  (interp (hardwarePrimitive D_0 j_0 realize)
    (.app (.app (.app (.lam x (.lam y (.lam z body)))) arg1) arg2)
    arg3)
    semanticEnv) i k <->
exists fuel, exists (tree : ChannelTree C
  (initialChannelConfig
    (.app (.app (.app (.lam x (.lam y (.lam z body)))) arg1)
    arg2) arg3)
    quantum))
  (R : ChannelTreeRealization D_0 j_0 realize tree),
tree.depth <= fuel /\
ResultAvailable tree selectors i /\
TTObservationToken.Holds resultCode token
  ((restrictedInstrument D_0 j_0 realize tree R selectors i).bind
  ?) :=
presented_channel_tree_token_adequacy_iff D_0 j_0 realize
  (initialChannelConfig
    (.app (.app (.app (.lam x (.lam y (.lam z body)))) arg1) arg2)
    arg3)
    quantum)
  (interp (hardwarePrimitive D_0 j_0 realize)
    (.app (.app (.app (.lam x (.lam y (.lam z body)))) arg1) arg2)
    arg3)
    semanticEnv)
  (closed_app_app_app_lam_lam_lam_admin_noapp_presented_channelTreeCompleteness
    D_0 j_0 realize x y z body arg1 arg2 arg3 hclosed hnoapp
    hadmin1 hadmin2 hadmin3 quantum semanticEnv)
  selectors ? k hk i token

/-- Value completeness under a right-nested ordinary-closure spine. -/
def ValueUnderFunctionSpine {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)

```

```

(frames : List (Name x Term (QubitPrimitive C) x RuntimeEnv C)) :
Prop :=
forall {s : ChannelConfig C} {arg : RuntimeValue C}
{answer : HSemanticComp D_0 j_0},
s.control = .value arg ->
s.stack = functionStack frames ->
FunctionSpineOk frames ->
ChannelConfig.WellScoped s ->
ChannelConfigRel D_0 j_0 realize s answer ->
PresentedChannelConfigCompleteness D_0 j_0 realize s answer

/-- Pauli-X under a nonempty function-frame spine, given value
completeness at that stack. -/
theorem pauliX_under_function_spine_of_value
{C : Type}
(D_0 : QDomain.{0})
(j_0 : IsContinuousLatticeProjection D_0.carrier
  (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
(realize : C -> HSemanticValue D_0 j_0)
(frames : List (Name x Term (QubitPrimitive C) x RuntimeEnv C))
(hVal : ValueUnderFunctionSpine D_0 j_0 realize frames)
{s : ChannelConfig C} {value : C} {answer : HSemanticComp D_0 j_0}
(hc : s.control = .term (.prim (.pauliX value)))
(hs : s.stack = functionStack frames)
(hok : FunctionSpineOk frames)
(hscoped : ChannelConfig.WellScoped s)
(hrel : ChannelConfigRel D_0 j_0 realize s answer) :
PresentedChannelConfigCompleteness D_0 j_0 realize s answer := by
have hsPx :
  {s with control := .term (.prim (.pauliX value))} = s :=
  ChannelConfig.ext hc.symm rfl rfl rfl
obtain <semanticEnv, kStack, henv, hstack, rfl> :=
  channelConfigRel_term_inv D_0 j_0 hc hrel
let sVal : ChannelConfig C :=
  {s with
    control := .value (.payload value)
    quantum := applyOperation Qubit.pauliXOp s.quantum}
have hstep : ChannelInternalStep s sVal := by
  have happ :
    ChannelInternalStep
      {s with control := .term (.prim (.pauliX value))}
      sVal :=
    ChannelInternalStep.pauliXPrimitive (s := s) (value := value)
  exact hsPx.symm |> happ
have hscopedVal : ChannelConfig.WellScoped sVal :=
  ChannelInternalStep.preserve_wellScoped hstep hscoped
have hrelVal : ChannelConfigRel D_0 j_0 realize sVal
  (kStack
    (semanticUnit (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0) (realize value))) :=
  <semanticUnit (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0) (realize value),
    kStack,
    ControlRel.value _ _ s.env
    (payload_related D_0 j_0 realize value),
    hstack, rfl>
have hval :=
  hVal (s := sVal) (arg := .payload value) rfl hs hok hscopedVal
  hrelVal
refine
  { related := hrel
    complete := ?_ }
constructor

```



```

intro selectors i ? k? hk
have hchildEq :=
  hval.complete.selected_result_eq_channelTree_sup_presented
  selectors i ? k? hk
have hden :
  interp (hardwarePrimitive D_0 j_0 realize)
    (.prim (.pauliX value)) semanticEnv =
    taggedEmbed
      (FiniteInstrumentComp.ofOperation Qubit.pauliXOp
        (realize value)) := by
    simp [hardwarePrimitive_pauliX]
have hne : s.stack != [] := by
  rw [hs]
  exact hok.stack_ne_nil
let unitVal : HSemanticComp D_0 j_0 :=
  semanticUnit (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0) (realize value)
let opVal : HSemanticComp D_0 j_0 :=
  taggedEmbed
    (FiniteInstrumentComp.ofOperation Qubit.pauliXOp
      (realize value))
have hchildCoord :
  kStack unitVal (HardwareAdequacy.encodePath selectors i) k? =
    sSup (channelTreeResults D_0 j_0 realize sVal selectors i
      k?) := by
  have hsel :
    HardwareAdequacy.selectPath selectors (kStack unitVal) i k? =
      kStack unitVal (HardwareAdequacy.encodePath selectors i)
      k? :=
    congrArg (fun f => f k?)
      (HardwareAdequacy.selectPath_apply_encode selectors
        (kStack unitVal) i)
  exact hsel.symm.trans hchildEq
have hselParent :
  HardwareAdequacy.selectPath selectors (kStack opVal) i k? =
    kStack opVal (HardwareAdequacy.encodePath selectors i) k? :=
  congrArg (fun f => f k?)
    (HardwareAdequacy.selectPath_apply_encode selectors
      (kStack opVal) i)
have hop :
  kStack opVal (HardwareAdequacy.encodePath selectors i) k? =
    embed (FiniteInstrumentComp.ofOperation Qubit.pauliXOp
      (realize value))
      (ScottMap.const
        (kStack unitVal (HardwareAdequacy.encodePath selectors i)
          k?)) :=
  stackRel_ofOperation_eval D_0 j_0 hstack hne
  Qubit.pauliXOp (realize value)
  (HardwareAdequacy.encodePath selectors i) k?
rw [hden, hselParent, hop, hchildCoord, embed_ofOperation_const_sSup]
apply le_antisymm
* apply sSup_le
  rintro T <r, <fuel, child, R, hdepth, rfl>, rfl>
  apply le_sSup
  refine <fuel + 1, ChannelTree.internal hstep child,
    wrapInternalRealization D_0 j_0 realize hstep child R, ?_, ?_>
  * change child.depth + 1 <= fuel + 1
  omega
  * exact
    (restrictedResult_internal_pauliX D_0 j_0 realize hstep hc
      child
      (wrapInternalRealization D_0 j_0 realize hstep child R)
      selectors i ? k? hk).symm

```

```

* apply sSup_le
rintro T <_, tree, R, _, rfl>
cases tree with
| terminal hterm =>
  cases hterm.control_eq.symm.trans hc
| @internal _ t' h next =>
  have ht : t' = sVal :=
    ChannelInternalStep.eq_config_of_pauliX h hc
  subst t'
  rw [restrictedResult_internal_pauliX D_0 j_0 realize h hc
    next R selectors i ? k? hk]
  apply le_sSup
  refine <restrictedResult D_0 j_0 realize next
    (internalChildRealization D_0 j_0 realize h next R)
    selectors i k?,
    <next.depth, next,
    internalChildRealization D_0 j_0 realize h next R,
    le_rfl, rfl>, rfl>
| external _ hex _ =>
  exact False.elim (ChannelExternalStep.not_prim hex hc)
| probability _ _ _ _ =>
  cases hc
| probabilityZero _ =>
  cases hc
| probabilityOne _ =>
  cases hc
| measurement _ _ =>
  cases hc

/-- Administrative NoApp under a function-frame spine, given value
completeness at that stack. -/
theorem admin_noapp_under_function_spine_of_value
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (frames : List (Name x Term (QubitPrimitive C) x RuntimeEnv C))
  (hVal : ValueUnderFunctionSpine D_0 j_0 realize frames)
  {s : ChannelConfig C} {code : Term (QubitPrimitive C)}
  {answer : HSemanticComp D_0 j_0}
  (hadmin : AdminNoApp code)
  (hc : s.control = .term code)
  (hs : s.stack = functionStack frames)
  (hok : FunctionSpineOk frames)
  (hscoped : ChannelConfig.WellScoped s)
  (hrel : ChannelConfigRel D_0 j_0 realize s answer) :
  PresentedChannelConfigCompleteness D_0 j_0 realize s answer := by
induction code generalizing s answer with
| var z =>
  have hctl := hscoped.left
  rw [hc] at hctl
  obtain <v, hlookup> := hctl.right z (by simp [free])
  have hsVar :

```

Lean 4 source (lines 801–1200)

```

  {s with control := .term (.var z)} = s :=
  ChannelConfig.ext hc.symm rfl rfl rfl
  have hrelVar : ChannelConfigRel D_0 j_0 realize
    {s with control := .term (.var z)} answer :=
    hsVar.symm |> hrel
  have hrelVal :=
    channel_config_variable D_0 j_0 hlookup hrelVar

```

```

have hscopedVal : ChannelConfig.WellScoped
  {s with control := .value v} :=
  <<hctl.left, hctl.left z v hlookup>, hscoped.right>
have hval :=
  hVal (s := {s with control := .value v}) (arg := v)
  rfl hs hok hscopedVal hrelVal
exact variable_presentedChannelConfigCompleteness D_0 j_0 realize
  hc hlookup hrel hval
| app _ _ =>
  exact False.elim hadmin
| lam z M _ih =>
  have hsLam :
    {s with control := .term (.lam z M)} = s :=
    ChannelConfig.ext hc.symm rfl rfl rfl
  have hrelLam : ChannelConfigRel D_0 j_0 realize
    {s with control := .term (.lam z M)} answer :=
    hsLam.symm |> hrel
  have hrelVal :=
    channel_config_lambda D_0 j_0 (s := s) hrelLam
  have hstepLam : ChannelInternalStep s
    {s with control := .value (.closure z M s.env)} := by
  have happ :
    ChannelInternalStep
    {s with control := .term (.lam z M)}
    {s with control := .value (.closure z M s.env)} :=
    ChannelInternalStep.lambda (s := s) (x := z) (body := M)
  exact hsLam.symm |> happ
  have hscopedVal : ChannelConfig.WellScoped
    {s with control := .value (.closure z M s.env)} :=
    ChannelInternalStep.preserve_wellScoped hstepLam hscoped
  have hval :=
    hVal (s := {s with control := .value (.closure z M s.env)})
    (arg := .closure z M s.env) rfl hs hok hscopedVal hrelVal
  exact lambda_presentedChannelConfigCompleteness D_0 j_0 realize
    hc hrel hval
| recLam self z M _ih =>
  have hsRec :
    {s with control := .term (.recLam self z M)} = s :=
    ChannelConfig.ext hc.symm rfl rfl rfl
  have hrelRec : ChannelConfigRel D_0 j_0 realize
    {s with control := .term (.recLam self z M)} answer :=
    hsRec.symm |> hrel
  have hrelVal :=
    channel_config_recursive D_0 j_0 (s := s) hrelRec
  have hstepRec : ChannelInternalStep s
    {s with control := .value (.recClosure self z M s.env)} := by
  have happ :
    ChannelInternalStep
    {s with control := .term (.recLam self z M)}
    {s with
      control := .value (.recClosure self z M s.env)} :=
    ChannelInternalStep.recursive (s := s) (self := self)
    (arg := z) (body := M)
  exact hsRec.symm |> happ
  have hscopedVal : ChannelConfig.WellScoped
    {s with control := .value (.recClosure self z M s.env)} :=
    ChannelInternalStep.preserve_wellScoped hstepRec hscoped
  have hval :=
    hVal
    (s :=
      {s with control := .value (.recClosure self z M s.env)})
    (arg := .recClosure self z M s.env) rfl hs hok hscopedVal
    hrelVal

```

```

    exact recLam_presentedChannelConfigCompleteness D_0 j_0 realize
      hc hrel hval
| intern left right ihL ihR =>
  have <hnaL, hnaR> := hadmin
  have hscopedL :=
    wellScoped_term_child (child := left) hc hscoped
    (fun z hz => by simp [free, hz])
  have hscopedR :=
    wellScoped_term_child (child := right) hc hscoped
    (fun z hz => by simp [free, hz])
  refine intern_related_presentedChannelConfigCompleteness
    D_0 j_0 realize hc hrel ?_ ?_
* intro semanticEnv k henv hstack
  exact ihL hnaL (s := {s with control := .term left}) rfl hs
    hscopedL
    <interp (hardwarePrimitive D_0 j_0 realize) left semanticEnv, k,
      ControlRel.term left s.env semanticEnv henv, hstack, rfl>
* intro semanticEnv k henv hstack
  exact ihR hnaR (s := {s with control := .term right}) rfl hs
    hscopedR
    <interp (hardwarePrimitive D_0 j_0 realize) right semanticEnv, k,
      ControlRel.term right s.env semanticEnv henv, hstack, rfl>
| extern _ _ _ =>
  exact False.elim hadmin
| prob p left right ihL ihR =>
  have <hnaL, hnaR> := hadmin
  have hscopedL :=
    wellScoped_term_child (child := left) hc hscoped
    (fun z hz => by simp [free, hz])
  have hscopedR :=
    wellScoped_term_child (child := right) hc hscoped
    (fun z hz => by simp [free, hz])
  refine prob_related_presentedChannelConfigCompleteness
    D_0 j_0 realize hc hrel ?_ ?_
* intro semanticEnv k quantum henv hstack
  exact ihL hnaL
    (s := {s with control := .term left, quantum := quantum})
    rfl hs <hscopedL.left, hscopedL.right>
    <interp (hardwarePrimitive D_0 j_0 realize) left semanticEnv, k,
      ControlRel.term left s.env semanticEnv henv, hstack, rfl>
* intro semanticEnv k quantum henv hstack
  exact ihR hnaR
    (s := {s with control := .term right, quantum := quantum})
    rfl hs <hscopedR.left, hscopedR.right>
    <interp (hardwarePrimitive D_0 j_0 realize) right semanticEnv, k,
      ControlRel.term right s.env semanticEnv henv, hstack, rfl>
| prim prim =>
  cases prim with
| ret value =>
  have hsRet :
    {s with control := .term (.prim (.ret value))} = s :=
    ChannelConfig.ext hc.symm rfl rfl rfl
  have hrelRet : ChannelConfigRel D_0 j_0 realize
    {s with control := .term (.prim (.ret value))} answer :=
    hsRet.symm |> hrel
  have hrelVal :=
    channel_config_return D_0 j_0 hrelRet
  have hstepRet : ChannelInternalStep s
    {s with control := .value (.payload value)} := by
  have happ :
    ChannelInternalStep
    {s with control := .term (.prim (.ret value))}
    {s with control := .value (.payload value)} :=

```

```

        ChannelInternalStep.returnPrimitive (s := s)
        (value := value)
    exact hsRet.symm |> happ
    have hscopedVal : ChannelConfig.WellScoped
        {s with control := .value (.payload value)} :=
        ChannelInternalStep.preserve_wellScoped hstepRet hscoped
    have hval :=
        hVal (s := {s with control := .value (.payload value)})
        (arg := .payload value) rfl hs hok hscopedVal hrelVal
    exact return_presentedChannelConfigCompleteness D_0 j_0 realize
        hc hrel hval
| pauliX value =>
    exact
        pauliX_under_function_spine_of_value
        D_0 j_0 realize frames hVal hc hs hok hscoped hrel
| measureZ _ =>
    exact False.elim hadmin

/-- List-of-frames completeness for a right-nested ordinary-closure
spine: a value, then administrative NoApp, at that stack. -/
theorem function_spine_presented
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (frames : List (Name x Term (QubitPrimitive C) x RuntimeEnv C))
  (hok : FunctionSpineOk frames) :
  ValueUnderFunctionSpine D_0 j_0 realize frames /\
    (forall {s : ChannelConfig C} {code : Term (QubitPrimitive C)}
      {answer : HSemanticComp D_0 j_0},
      AdminNoApp code ->
        s.control = .term code ->
        s.stack = functionStack frames ->
        FunctionSpineOk frames ->
        ChannelConfig.WellScoped s ->
        ChannelConfigRel D_0 j_0 realize s answer ->
        PresentedChannelConfigCompleteness D_0 j_0 realize s answer) := by
induction frames with
| nil => exact False.elim hok
| cons p rest ih =>
    rcases p with <x, body, clo>
    cases rest with
    | nil =>
        have hnoapp : NoApp body := FunctionSpineOk_singleton.mp hok
        have hval : ValueUnderFunctionSpine D_0 j_0 realize
            [(x, body, clo)] := by
            intro s arg answer hc hs _hok hscoped hrel
            have hs' : s.stack = [.function (.closure x body clo)] := by
                simpa [functionStack] using hs
            exact
                value_under_closure_nil_presentedChannelConfigCompleteness
                D_0 j_0 realize hc hs' hnoapp hscoped hrel
        exact <hval,
            fun {s} {code} {answer} =>
                admin_noapp_under_function_spine_of_value
                D_0 j_0 realize [(x, body, clo)] hval>
    | cons q rest' =>
        have <hadminY, hokRest> :=
            (FunctionSpineOk_cons_cons
              (x := x) (body := body) (clo := clo) (y := q)
              (rest := rest')).mp hok
        obtain <ihVal, ihAdmin> := ih hokRest

```

```

have hval : ValueUnderFunctionSpine D_0 j_0 realize
  ((x, body, clo) :: q :: rest') := by
  intro s arg answer hc hs _hok' hscoped hrel
  have hseEq :
    {s with
      control := .value arg
      stack :=
        .function (.closure x body clo) ::
          functionStack (q :: rest')}} = s :=
    ChannelConfig.ext hc.symm rfl hs.symm rfl
  have hrel' : ChannelConfigRel D_0 j_0 realize
    {s with
      control := .value arg
      stack :=
        .function (.closure x body clo) ::
          functionStack (q :: rest')}}
    answer :=
      hseEq.symm |> hrel
  have hrelBody :=
    channel_config_beta D_0 j_0 (s := s) (x := x)
      (body := body) (closureEnv := clo) (arg := arg)
      (rest := functionStack (q :: rest')) hrel'
  let sBody : ChannelConfig C :=
    {s with
      control := .term body
      env := RuntimeEnv.bind x arg clo
      stack := functionStack (q :: rest')}}
  have hstepBeta : ChannelInternalStep s sBody := by
    have happ :
      ChannelInternalStep
        {s with
          control := .value arg
          stack :=
            .function (.closure x body clo) ::
              functionStack (q :: rest')}}
        sBody :=
          ChannelInternalStep.beta (s := s) (x := x)
            (body := body) (closureEnv := clo) (arg := arg)
            (rest := functionStack (q :: rest'))
    exact hseEq.symm |> happ
  have hscopedBody : ChannelConfig.WellScoped sBody :=
    ChannelInternalStep.preserve_wellScoped hstepBeta hscoped
  have hchild :=
    ihAdmin (s := sBody) (code := body) hadminY rfl rfl
    hokRest hscopedBody hrelBody
  exact beta_presentedChannelConfigCompleteness D_0 j_0 realize
    (s := s) (x := x) (body := body) (closureEnv := clo)
    (arg := arg) (rest := functionStack (q :: rest'))
    hc hs hrel hchild
exact <hval,
  fun {s} {code} {answer} =>
    admin_noapp_under_function_spine_of_value
      D_0 j_0 realize ((x, body, clo) :: q :: rest') hval>

theorem value_under_function_spine_presentedChannelConfigCompleteness
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (frames : List (Name x Term (QubitPrimitive C) x RuntimeEnv C))
  (hok : FunctionSpineOk frames)
  {s : ChannelConfig C} {arg : RuntimeValue C}

```

```

{answer : HSemanticComp D_0 j_0}
(hc : s.control = .value arg)
(hs : s.stack = functionStack frames)
(hscoped : ChannelConfig.WellScoped s)
(hrel : ChannelConfigRel D_0 j_0 realize s answer) :
PresentedChannelConfigCompleteness D_0 j_0 realize s answer :=
(function_spine_presented D_0 j_0 realize frames hok).1
hc hs hok hscoped hrel

theorem admin_noapp_under_function_spine_presentedChannelConfigCompleteness
{C : Type}
(D_0 : QDomain.{0})
(j_0 : IsContinuousLatticeProjection D_0.carrier
  (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
(realize : C -> HSemanticValue D_0 j_0)
(frames : List (Name x Term (QubitPrimitive C) x RuntimeEnv C))
(hok : FunctionSpineOk frames)
{s : ChannelConfig C} {code : Term (QubitPrimitive C)}
{answer : HSemanticComp D_0 j_0}
(hadmin : AdminNoApp code)
(hc : s.control = .term code)
(hs : s.stack = functionStack frames)
(hscoped : ChannelConfig.WellScoped s)
(hrel : ChannelConfigRel D_0 j_0 realize s answer) :
PresentedChannelConfigCompleteness D_0 j_0 realize s answer :=
(function_spine_presented D_0 j_0 realize frames hok).2
hadmin hc hs hok hscoped hrel

/-- Inner `app (lam y bodyY) arg` under a residual function-frame
spine. -/
theorem app_lam_under_function_spine_presentedChannelConfigCompleteness
{C : Type}
(D_0 : QDomain.{0})
(j_0 : IsContinuousLatticeProjection D_0.carrier
  (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
(realize : C -> HSemanticValue D_0 j_0)
(rest : List (Name x Term (QubitPrimitive C) x RuntimeEnv C))
(hok : FunctionSpineOk rest)
{s : ChannelConfig C} {y : Name}
{bodyY arg : Term (QubitPrimitive C)} {answer : HSemanticComp D_0 j_0}
(hc : s.control = .term (.app (.lam y bodyY) arg))
(hs : s.stack = functionStack rest)
(hadminY : AdminNoApp bodyY) (hadminArg : AdminNoApp arg)
(hscoped : ChannelConfig.WellScoped s)
(hrel : ChannelConfigRel D_0 j_0 realize s answer) :
PresentedChannelConfigCompleteness D_0 j_0 realize s answer := by
have hsApp :
  {s with control := .term (.app (.lam y bodyY) arg)} = s :=
  ChannelConfig.ext hc.symm rfl rfl rfl
have hrelApp : ChannelConfigRel D_0 j_0 realize
  {s with control := .term (.app (.lam y bodyY) arg)} answer :=
  hsApp.symm |> hrel
have hrelLam :=
  channel_config_application D_0 j_0 (s := s)
  (fn := .lam y bodyY) (arg := arg) hrelApp
have hrelClo :=
  channel_config_lambda D_0 j_0
  (s := {s with stack := .argument arg s.env :: s.stack})
  hrelLam
have hrelArg :=
  channel_config_evaluateArgument D_0 j_0
  (s :=
    {s with

```

```

        control := .value (.closure y bodyY s.env)
        stack := .argument arg s.env :: s.stack})
    (fn := .closure y bodyY s.env) (arg := arg)
    (callEnv := s.env) (rest := s.stack) hrelClo
let sArg : ChannelConfig C :=
  {s with
    control := .term arg
    stack := .function (.closure y bodyY s.env) :: s.stack}
have hstepApp : ChannelInternalStep s
  {s with
    control := .term (.lam y bodyY)
    stack := .argument arg s.env :: s.stack} := by
  have happ :
    ChannelInternalStep
      {s with control := .term (.app (.lam y bodyY) arg)}
      {s with
        control := .term (.lam y bodyY)
        stack := .argument arg s.env :: s.stack} :=
    ChannelInternalStep.application (s := s)
    (fn := .lam y bodyY) (arg := arg)
  exact hsApp.symm |> happ
have hstepLam : ChannelInternalStep
  {s with
    control := .term (.lam y bodyY)
    stack := .argument arg s.env :: s.stack}
  {s with
    control := .value (.closure y bodyY s.env)
    stack := .argument arg s.env :: s.stack} :=
  ChannelInternalStep.lambda
    (s := {s with stack := .argument arg s.env :: s.stack})
    (x := y) (body := bodyY)
have hstepArg : ChannelInternalStep
  {s with
    control := .value (.closure y bodyY s.env)
    stack := .argument arg s.env :: s.stack}
  sArg :=
  ChannelInternalStep.evaluateArgument
    (s :=
      {s with
        control := .value (.closure y bodyY s.env)
        stack := .argument arg s.env :: s.stack})
    (fn := .closure y bodyY s.env) (arg := arg)
    (callEnv := s.env) (rest := s.stack)
have hscopedArg : ChannelConfig.WellScoped sArg :=
  ChannelInternalStep.preserve_wellScoped hstepArg
  (ChannelInternalStep.preserve_wellScoped hstepLam
    (ChannelInternalStep.preserve_wellScoped hstepApp hscoped))
have hsArg :
  sArg.stack = functionStack ((y, bodyY, s.env) :: rest) := by
  simp [sArg, hs]
have hokFull : FunctionSpineOk ((y, bodyY, s.env) :: rest) :=
  FunctionSpineOk.cons hok.ne_nil hadminY hok
have harg :
  PresentedChannelConfigCompleteness D_0 j_0 realize sArg answer :=
  admin_noapp_under_function_spine_presentedChannelConfigCompleteness
    D_0 j_0 realize ((y, bodyY, s.env) :: rest) hokFull
  (s := sArg) (code := arg) hadminArg rfl hsArg hscopedArg
  (by
    change ChannelConfigRel D_0 j_0 realize
      {s with
        control := .term arg
        env := s.env
        stack :=

```



```

        .function (.closure y bodyY s.env) :: s.stack}

    exact hrelArg)
exact stacked_lam_app_presentedChannelConfigCompleteness D_0 j_0 realize
  (s := s) (x := y) (body := bodyY) (arg := arg) hc hrel harg

/-- Closed right-nested
`app (lam x bodyX) (app (lam y bodyY) (app (lam z bodyZ) arg))`. -/
theorem closed_nested3_lam_admin_noapp_presented_channelTreeCompleteness
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (x y z : Name) (bodyX bodyY bodyZ arg : Term (QubitPrimitive C))

```

Lean 4 source (lines 1201–1600)

```

(hclosed : Closed
  (.app (.lam x bodyX)
    (.app (.lam y bodyY) (.app (.lam z bodyZ) arg))))
(hnoappX : NoApp bodyX)
(hadminY : AdminNoApp bodyY) (hadminZ : AdminNoApp bodyZ)
(hadminArg : AdminNoApp arg)
(quantum : NormalizedDensity 2)
(semanticEnv : Env (HSemanticValue D_0 j_0)) :
PresentedChannelTreeCompleteness D_0 j_0 realize
  (initialChannelConfig
    (.app (.lam x bodyX)
      (.app (.lam y bodyY) (.app (.lam z bodyZ) arg))))
  quantum)
(interp (hardwarePrimitive D_0 j_0 realize)
  (.app (.lam x bodyX)
    (.app (.lam y bodyY) (.app (.lam z bodyZ) arg))))
  semanticEnv) := by
let inner2 : Term (QubitPrimitive C) := .app (.lam z bodyZ) arg
let inner1 : Term (QubitPrimitive C) := .app (.lam y bodyY) inner2
let code : Term (QubitPrimitive C) := .app (.lam x bodyX) inner1
let s : ChannelConfig C := initialChannelConfig code quantum
have hc : s.control = .term code := rfl
have hrel :=
  initialChannelConfig_related D_0 j_0 realize code quantum semanticEnv
have hscoped :=
  initialChannelConfig_wellScoped hclosed quantum
have hsApp :
  {s with control := .term (.app (.lam x bodyX) inner1)} = s :=
  ChannelConfig.ext hc.symm rfl rfl rfl
have hrelApp : ChannelConfigRel D_0 j_0 realize
  {s with control := .term (.app (.lam x bodyX) inner1)}
  (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv) :=
  hsApp.symm |> hrel
have hrelLam :=
  channel_config_application D_0 j_0 (s := s)
  (fn := .lam x bodyX) (arg := inner1) hrelApp
have hrelClo :=
  channel_config_lambda D_0 j_0
  (s := {s with stack := .argument inner1 s.env :: s.stack})
  hrelLam
have hrelInner :=
  channel_config_evaluateArgument D_0 j_0
  (s :=
    {s with
      control := .value (.closure x bodyX s.env)
      stack := .argument inner1 s.env :: s.stack})

```

```

      (fn := .closure x bodyX s.env) (arg := inner1)
      (callEnv := s.env) (rest := s.stack) hrelClo
let sInner : ChannelConfig C :=
  {s with
    control := .term inner1
    stack := .function (.closure x bodyX s.env) :: s.stack}
have hstepApp : ChannelInternalStep s
  {s with
    control := .term (.lam x bodyX)
    stack := .argument inner1 s.env :: s.stack} := by
  have happ :
    ChannelInternalStep
      {s with control := .term (.app (.lam x bodyX) inner1)}
      {s with
        control := .term (.lam x bodyX)
        stack := .argument inner1 s.env :: s.stack} :=
    ChannelInternalStep.application (s := s)
    (fn := .lam x bodyX) (arg := inner1)
  exact hsApp.symm |> happ
have hstepLam : ChannelInternalStep
  {s with
    control := .term (.lam x bodyX)
    stack := .argument inner1 s.env :: s.stack}
  {s with
    control := .value (.closure x bodyX s.env)
    stack := .argument inner1 s.env :: s.stack} :=
  ChannelInternalStep.lambda
    (s := {s with stack := .argument inner1 s.env :: s.stack})
    (x := x) (body := bodyX)
have hstepInner : ChannelInternalStep
  {s with
    control := .value (.closure x bodyX s.env)
    stack := .argument inner1 s.env :: s.stack}
  sInner :=
  ChannelInternalStep.evaluateArgument
    (s :=
      {s with
        control := .value (.closure x bodyX s.env)
        stack := .argument inner1 s.env :: s.stack})
    (fn := .closure x bodyX s.env) (arg := inner1)
    (callEnv := s.env) (rest := s.stack)
have hscopedInner : ChannelConfig.WellScoped sInner :=
  ChannelInternalStep.preserve_wellScoped hstepInner
  (ChannelInternalStep.preserve_wellScoped hstepLam
    (ChannelInternalStep.preserve_wellScoped hstepApp hscoped))
have hsInner :
  sInner.stack = functionStack [(x, bodyX, s.env)] := by
  simp [sInner, s, initialChannelConfig, ofConfig, initialConfig]
have hokX : FunctionSpineOk [(x, bodyX, s.env)] := hnoappX
have hsApp1 :
  {sInner with control := .term (.app (.lam y bodyY) inner2)} =
  sInner :=
  ChannelConfig.ext rfl rfl rfl rfl
have hrelApp1 : ChannelConfigRel D_0 j_0 realize
  {sInner with control := .term (.app (.lam y bodyY) inner2)}
  (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv) := by
  change ChannelConfigRel D_0 j_0 realize
  {s with
    control := .term inner1
    env := s.env
    stack := .function (.closure x bodyX s.env) :: s.stack}
  -
  exact hrelInner

```

```

have hrelLam1 :=
  channel_config_application D_0 j_0 (s := sInner)
    (fn := .lam y bodyY) (arg := inner2) hrelApp1
have hrelClo1 :=
  channel_config_lambda D_0 j_0
    (s := {sInner with stack := .argument inner2 sInner.env :: sInner.stack})
    hrelLam1
have hrelInner2 :=
  channel_config_evaluateArgument D_0 j_0
    (s :=
      {sInner with
        control := .value (.closure y bodyY sInner.env)
        stack := .argument inner2 sInner.env :: sInner.stack})
    (fn := .closure y bodyY sInner.env) (arg := inner2)
    (callEnv := sInner.env) (rest := sInner.stack) hrelClo1
let sInner2 : ChannelConfig C :=
  {sInner with
    control := .term inner2
    stack := .function (.closure y bodyY sInner.env) :: sInner.stack}
have hstepApp1 : ChannelInternalStep sInner
  {sInner with
    control := .term (.lam y bodyY)
    stack := .argument inner2 sInner.env :: sInner.stack} := by
  have happ :
    ChannelInternalStep
      {sInner with control := .term (.app (.lam y bodyY) inner2)}
      {sInner with
        control := .term (.lam y bodyY)
        stack := .argument inner2 sInner.env :: sInner.stack} :=
    ChannelInternalStep.application (s := sInner)
      (fn := .lam y bodyY) (arg := inner2)
  exact hsApp1.symm |> happ
have hstepLam1 : ChannelInternalStep
  {sInner with
    control := .term (.lam y bodyY)
    stack := .argument inner2 sInner.env :: sInner.stack}
  {sInner with
    control := .value (.closure y bodyY sInner.env)
    stack := .argument inner2 sInner.env :: sInner.stack} :=
  ChannelInternalStep.lambda
    (s := {sInner with stack := .argument inner2 sInner.env :: sInner.stack})
    (x := y) (body := bodyY)
have hstepInner2 : ChannelInternalStep
  {sInner with
    control := .value (.closure y bodyY sInner.env)
    stack := .argument inner2 sInner.env :: sInner.stack}
  sInner2 :=
  ChannelInternalStep.evaluateArgument
    (s :=
      {sInner with
        control := .value (.closure y bodyY sInner.env)
        stack := .argument inner2 sInner.env :: sInner.stack})
    (fn := .closure y bodyY sInner.env) (arg := inner2)
    (callEnv := sInner.env) (rest := sInner.stack)
have hscopedInner2 : ChannelConfig.WellScoped sInner2 :=
  ChannelInternalStep.preserve_wellScoped hstepInner2
    (ChannelInternalStep.preserve_wellScoped hstepLam1
      (ChannelInternalStep.preserve_wellScoped hstepApp1
        hscopedInner))
have hsInner2 :
  sInner2.stack =
    functionStack [(y, bodyY, s.env), (x, bodyX, s.env)] := by
  simp [sInner2, sInner, s, initialChannelConfig, ofConfig,

```

```

    initialConfig]
have hokXY : FunctionSpineOk [(y, bodyY, s.env), (x, bodyX, s.env)] :=
  <hadminY, hokX>
have hinner2 :
  PresentedChannelConfigCompleteness D_0 j_0 realize sInner2
  (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv) :=
app_lam_under_function_spine_presentedChannelConfigCompleteness
D_0 j_0 realize [(y, bodyY, s.env), (x, bodyX, s.env)] hokXY
(s := sInner2) (y := z) (bodyY := bodyZ) (arg := arg)
rfl hsInner2 hadminZ hadminArg hscopedInner2
(by
  change ChannelConfigRel D_0 j_0 realize
    {sInner with
      control := .term inner2
      env := sInner.env
      stack :=
        .function (.closure y bodyY sInner.env) ::
          sInner.stack}
    -
    exact hrelInner2)
have hinner1 :
  PresentedChannelConfigCompleteness D_0 j_0 realize sInner
  (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv) :=
stacked_lam_app_presentedChannelConfigCompleteness D_0 j_0 realize
(s := sInner) (x := y) (body := bodyY) (arg := inner2) rfl
(by
  change ChannelConfigRel D_0 j_0 realize
    {s with
      control := .term inner1
      env := s.env
      stack := .function (.closure x bodyX s.env) :: s.stack}
    -
    exact hrelInner)
hinner2
exact (stacked_lam_app_presentedChannelConfigCompleteness D_0 j_0 realize
  (s := s) (x := x) (body := bodyX) (arg := inner1) hc hrel
  hinner1).complete

/-- Token adequacy for closed right-nested
`app (lam x bodyX) (app (lam y bodyY) (app (lam z bodyZ) arg))`. -/
theorem closed_nested3_lam_admin_noapp_presented_token_adequacy
{C : Type}
(D_0 : QDomain.{0})
(j_0 : IsContinuousLatticeProjection D_0.carrier
  (QuantumFunctor (QModel (TTEnternalContinuationPower 2)) D_0.carrier))
(realize : C -> HSemanticValue D_0 j_0)
(x y z : Name) (bodyX bodyY bodyZ arg : Term (QubitPrimitive C))
(hclosed : Closed
  (.app (.lam x bodyX)
    (.app (.lam y bodyY) (.app (.lam z bodyZ) arg)))))
(hnoappX : NoApp bodyX)
(hadminY : AdminNoApp bodyY) (hadminZ : AdminNoApp bodyZ)
(hadminArg : AdminNoApp arg)
(quantum : NormalizedDensity 2)
(semanticEnv : Env (HSemanticValue D_0 j_0))
(selectors : List Bool)
(? : HSemanticValue D_0 j_0 -> FiniteInstrumentComp 2 PUnit.{1})
(k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2))
(hk : forall d, k d = (? d).satisfiedTTTheory resultCode)
(i : Nat) (token : TTObservationToken 2) :
token in HardwareAdequacy.selectPath selectors
  (interp (hardwarePrimitive D_0 j_0 realize)
    (.app (.lam x bodyX)

```

```

      (.app (.lam y bodyY) (.app (.lam z bodyZ) arg)))
    semanticEnv) i k <->
exists fuel, exists (tree : ChannelTree C
  (initialChannelConfig
    (.app (.lam x bodyX)
      (.app (.lam y bodyY) (.app (.lam z bodyZ) arg)))
    quantum))
  (R : ChannelTreeRealization D_0 j_0 realize tree),
  tree.depth <= fuel /\
  ResultAvailable tree selectors i /\
  TTObservationToken.Holds resultCode token
  ((restrictedInstrument D_0 j_0 realize tree R selectors i).bind
    ?) :=
presented_channel_tree_token_adequacy_iff D_0 j_0 realize
  (initialChannelConfig
    (.app (.lam x bodyX)
      (.app (.lam y bodyY) (.app (.lam z bodyZ) arg)))
    quantum)
  (interp (hardwarePrimitive D_0 j_0 realize)
    (.app (.lam x bodyX)
      (.app (.lam y bodyY) (.app (.lam z bodyZ) arg)))
    semanticEnv)
  (closed_nested3_lam_admin_noapp_presented_channelTreeCompleteness
    D_0 j_0 realize x y z bodyX bodyY bodyZ arg hclosed hnoappX
    hadminY hadminZ hadminArg quantum semanticEnv)
  selectors ? k hk i token

/-- Value completeness under a function spine over leftover argument
frames. -/
def ValueUnderMixedSpine {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (fns : List (Name x Term (QubitPrimitive C) x RuntimeEnv C))
  (args : List (Term (QubitPrimitive C) x RuntimeEnv C)) : Prop :=
forall {s : ChannelConfig C} {arg : RuntimeValue C}
  {answer : HSemanticComp D_0 j_0},
  s.control = .value arg ->
  s.stack = mixedStack fns args ->
  MixedSpineOk fns args ->
  ArgumentFramesOk args ->
  ChannelConfig.WellScoped s ->
  ChannelConfigRel D_0 j_0 realize s answer ->
  PresentedChannelConfigCompleteness D_0 j_0 realize s answer

/-- Pauli-X under a mixed function/argument spine, given value
completeness at that stack. -/
theorem pauliX_under_mixed_spine_of_value
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (fns : List (Name x Term (QubitPrimitive C) x RuntimeEnv C))
  (args : List (Term (QubitPrimitive C) x RuntimeEnv C))
  (hVal : ValueUnderMixedSpine D_0 j_0 realize fns args)
  {s : ChannelConfig C} {value : C} {answer : HSemanticComp D_0 j_0}
  (hc : s.control = .term (.prim (.pauliX value)))
  (hs : s.stack = mixedStack fns args)
  (hok : MixedSpineOk fns args) (hargs : ArgumentFramesOk args)
  (hscoped : ChannelConfig.WellScoped s)
  (hrel : ChannelConfigRel D_0 j_0 realize s answer) :

```

```

PresentedChannelConfigCompleteness D_0 j_0 realize s answer := by
have hsPx :
  {s with control := .term (.prim (.pauliX value))} = s :=
  ChannelConfig.ext hc.symm rfl rfl rfl
obtain <semanticEnv, kStack, henv, hstack, rfl> :=
  channelConfigRel_term_inv D_0 j_0 hc hrel
let sVal : ChannelConfig C :=
  {s with
    control := .value (.payload value)
    quantum := applyOperation Qubit.pauliXOp s.quantum}
have hstep : ChannelInternalStep s sVal := by
  have happ :
    ChannelInternalStep
      {s with control := .term (.prim (.pauliX value))}
      sVal :=
    ChannelInternalStep.pauliXPrimitive (s := s) (value := value)
  exact hsPx.symm |> happ
have hscopedVal : ChannelConfig.WellScoped sVal :=
  ChannelInternalStep.preserve_wellScoped hstep hscoped
have hrelVal : ChannelConfigRel D_0 j_0 realize sVal
  (kStack
    (semanticUnit (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0) (realize value))) :=
  <semanticUnit (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0) (realize value),
    kStack,
    ControlRel.value _ _ s.env
    (payload_related D_0 j_0 realize value),
    hstack, rfl>
have hval :=
  hVal (s := sVal) (arg := .payload value) rfl hs hok hargs
  hscopedVal hrelVal
refine
  { related := hrel
    complete := ?_ }
constructor
intro selectors i ? k? hk
have hchildEq :=
  hval.complete.selected_result_eq_channelTree_sup_presented
  selectors i ? k? hk
have hden :
  interp (hardwarePrimitive D_0 j_0 realize)
    (.prim (.pauliX value)) semanticEnv =
    taggedEmbed
      (FiniteInstrumentComp.ofOperation Qubit.pauliXOp
        (realize value)) := by
  simp [hardwarePrimitive_pauliX]
have hne : s.stack != [] := by
  rw [hs]
  exact hok.stack_ne_nil
let unitVal : HSemanticComp D_0 j_0 :=
  semanticUnit (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0) (realize value)
let opVal : HSemanticComp D_0 j_0 :=
  taggedEmbed
    (FiniteInstrumentComp.ofOperation Qubit.pauliXOp
      (realize value))
have hchildCoord :
  kStack unitVal (HardwareAdequacy.encodePath selectors i) k? =
  sSup (channelTreeResults D_0 j_0 realize sVal selectors i
    k?) := by
  have hsel :
    HardwareAdequacy.selectPath selectors (kStack unitVal) i k? =

```

```

      kStack unitVal (HardwareAdequacy.encodePath selectors i)
      k? :=
    congrArg (fun f => f k?)
      (HardwareAdequacy.selectPath_apply_encode selectors
        (kStack unitVal) i)
  exact hsel.symm.trans hchildEq
have hselParent :
  HardwareAdequacy.selectPath selectors (kStack opVal) i k? =
  kStack opVal (HardwareAdequacy.encodePath selectors i) k? :=
  congrArg (fun f => f k?)
    (HardwareAdequacy.selectPath_apply_encode selectors
      (kStack opVal) i)
have hop :
  kStack opVal (HardwareAdequacy.encodePath selectors i) k? =
  embed (FiniteInstrumentComp.ofOperation Qubit.pauliXOp
    (realize value))
    (ScottMap.const
      (kStack unitVal (HardwareAdequacy.encodePath selectors i)
        k?)) :=
  stackRel_ofOperation_eval D_0 j_0 hstack hne
  Qubit.pauliXOp (realize value)
  (HardwareAdequacy.encodePath selectors i) k?
rw [hden, hselParent, hop, hchildCoord, embed_ofOperation_const_sSup]
apply le_antisymm
* apply sSup_le
  rintro T <r, <fuel, child, R, hdepth, rfl>, rfl>
  apply le_sSup
  refine <fuel + 1, ChannelTree.internal hstep child,
    wrapInternalRealization D_0 j_0 realize hstep child R, ?_, ?_>
  * change child.depth + 1 <= fuel + 1
  omega
  * exact
    (restrictedResult_internal_pauliX D_0 j_0 realize hstep hc
      child
      (wrapInternalRealization D_0 j_0 realize hstep child R)
      selectors i ? k? hk).symm
* apply sSup_le
  rintro T <_, tree, R, _, rfl>
  cases tree with

```

Lean 4 source (lines 1601–2000)

```

| terminal hterm =>
  cases hterm.control_eq.symm.trans hc
| @internal _ t' h next =>
  have ht : t' = sVal :=
    ChannelInternalStep.eq_config_of_pauliX h hc
  subst t'
  rw [restrictedResult_internal_pauliX D_0 j_0 realize h hc
    next R selectors i ? k? hk]
  apply le_sSup
  refine <restrictedResult D_0 j_0 realize next
    (internalChildRealization D_0 j_0 realize h next R)
    selectors i k?,
    <next.depth, next,
      internalChildRealization D_0 j_0 realize h next R,
      le_rfl, rfl>, rfl>
| external _ hex _ =>
  exact False.elim (ChannelExternalStep.not_prim hex hc)
| probability _ _ _ =>
  cases hc
| probabilityZero _ =>
  cases hc
| probabilityOne _ =>

```

```

      cases hc
    | measurement _ _ =>
      cases hc

/-- Administrative NoApp under a mixed spine, given value completeness
at that stack. -/
theorem admin_noapp_under_mixed_spine_of_value
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (fns : List (Name x Term (QubitPrimitive C) x RuntimeEnv C))
  (args : List (Term (QubitPrimitive C) x RuntimeEnv C))
  (hVal : ValueUnderMixedSpine D_0 j_0 realize fns args)
  {s : ChannelConfig C} {code : Term (QubitPrimitive C)}
  {answer : HSemanticComp D_0 j_0}
  (hadmin : AdminNoApp code)
  (hc : s.control = .term code)
  (hs : s.stack = mixedStack fns args)
  (hok : MixedSpineOk fns args) (hargs : ArgumentFramesOk args)
  (hscoped : ChannelConfig.WellScoped s)
  (hrel : ChannelConfigRel D_0 j_0 realize s answer) :
  PresentedChannelConfigCompleteness D_0 j_0 realize s answer := by
induction code generalizing s answer with
| var z =>
  have hctl := hscoped.left
  rw [hc] at hctl
  obtain <v, hlookup> := hctl.right z (by simp [free])
  have hsVar :
    {s with control := .term (.var z)} = s :=
    ChannelConfig.ext hc.symm rfl rfl rfl
  have hrelVar : ChannelConfigRel D_0 j_0 realize
    {s with control := .term (.var z)} answer :=
    hsVar.symm |> hrel
  have hrelVal :=
    channel_config_variable D_0 j_0 hlookup hrelVar
  have hscopedVal : ChannelConfig.WellScoped
    {s with control := .value v} :=
    <<hctl.left, hctl.left z v hlookup>, hscoped.right>
  have hval :=
    hVal (s := {s with control := .value v}) (arg := v)
    rfl hs hok hargs hscopedVal hrelVal
  exact variable_presentedChannelConfigCompleteness D_0 j_0 realize
    hc hlookup hrel hval
| app _ _ =>
  exact False.elim hadmin
| lam z M _ih =>
  have hsLam :
    {s with control := .term (.lam z M)} = s :=
    ChannelConfig.ext hc.symm rfl rfl rfl
  have hrelLam : ChannelConfigRel D_0 j_0 realize
    {s with control := .term (.lam z M)} answer :=
    hsLam.symm |> hrel
  have hrelVal :=
    channel_config_lambda D_0 j_0 (s := s) hrelLam
  have hstepLam : ChannelInternalStep s
    {s with control := .value (.closure z M s.env)} := by
  have happ :
    ChannelInternalStep
      {s with control := .term (.lam z M)}
      {s with control := .value (.closure z M s.env)} :=
    ChannelInternalStep.lambda (s := s) (x := z) (body := M)

```



```

    exact hslam.symm |> happ
  have hscopedVal : ChannelConfig.WellScoped
    {s with control := .value (.closure z M s.env)} :=
    ChannelInternalStep.preserve_wellScoped hstepLam hscoped
  have hval :=
    hVal (s := {s with control := .value (.closure z M s.env)})
      (arg := .closure z M s.env) rfl hs hok hargs hscopedVal
      hrelVal
  exact lambda_presentedChannelConfigCompleteness D_0 j_0 realize
    hc hrel hval
| recLam self z M _ih =>
  have hsRec :
    {s with control := .term (.recLam self z M)} = s :=
    ChannelConfig.ext hc.symm rfl rfl rfl
  have hrelRec : ChannelConfigRel D_0 j_0 realize
    {s with control := .term (.recLam self z M)} answer :=
    hsRec.symm |> hrel
  have hrelVal :=
    channel_config_recursive D_0 j_0 (s := s) hrelRec
  have hstepRec : ChannelInternalStep s
    {s with control := .value (.recClosure self z M s.env)} := by
    have happ :
      ChannelInternalStep
        {s with control := .term (.recLam self z M)}
        {s with
          control := .value (.recClosure self z M s.env)} :=
      ChannelInternalStep.recursive (s := s) (self := self)
        (arg := z) (body := M)
    exact hsRec.symm |> happ
  have hscopedVal : ChannelConfig.WellScoped
    {s with control := .value (.recClosure self z M s.env)} :=
    ChannelInternalStep.preserve_wellScoped hstepRec hscoped
  have hval :=
    hVal
      (s :=
        {s with control := .value (.recClosure self z M s.env)})
      (arg := .recClosure self z M s.env) rfl hs hok hargs
      hscopedVal hrelVal
  exact recLam_presentedChannelConfigCompleteness D_0 j_0 realize
    hc hrel hval
| intern left right ihL ihR =>
  have <hnaL, hnaR> := hadmin
  have hscopedL :=
    wellScoped_term_child (child := left) hc hscoped
    (fun z hz => by simp [free, hz])
  have hscopedR :=
    wellScoped_term_child (child := right) hc hscoped
    (fun z hz => by simp [free, hz])
  refine intern_related_presentedChannelConfigCompleteness
    D_0 j_0 realize hc hrel ?_ ?_
  * intro semanticEnv k henv hstack
    exact ihL hnaL (s := {s with control := .term left}) rfl hs
      hscopedL
    <interp (hardwarePrimitive D_0 j_0 realize) left semanticEnv, k,
      ControlRel.term left s.env semanticEnv henv, hstack, rfl>
  * intro semanticEnv k henv hstack
    exact ihR hnaR (s := {s with control := .term right}) rfl hs
      hscopedR
    <interp (hardwarePrimitive D_0 j_0 realize) right semanticEnv, k,
      ControlRel.term right s.env semanticEnv henv, hstack, rfl>
| extern _ _ _ =>
  exact False.elim hadmin
| prob p left right ihL ihR =>

```

```

have <hnaL, hnaR> := hadmin
have hscopedL :=
  wellScoped_term_child (child := left) hc hscoped
  (fun z hz => by simp [free, hz])
have hscopedR :=
  wellScoped_term_child (child := right) hc hscoped
  (fun z hz => by simp [free, hz])
refine prob_related_presentedChannelConfigCompleteness
D_0 j_0 realize hc hrel ?_ ?_
* intro semanticEnv k quantum henv hstack
exact ihL hnaL
(s := {s with control := .term left, quantum := quantum})
rfl hs <hscopedL.left, hscopedL.right>
<interp (hardwarePrimitive D_0 j_0 realize) left semanticEnv, k,
  ControlRel.term left s.env semanticEnv henv, hstack, rfl>
* intro semanticEnv k quantum henv hstack
exact ihR hnaR
(s := {s with control := .term right, quantum := quantum})
rfl hs <hscopedR.left, hscopedR.right>
<interp (hardwarePrimitive D_0 j_0 realize) right semanticEnv, k,
  ControlRel.term right s.env semanticEnv henv, hstack, rfl>
| prim prim =>
  cases prim with
  | ret value =>
    have hsRet :
      {s with control := .term (.prim (.ret value))} = s :=
      ChannelConfig.ext hc.symm rfl rfl rfl
    have hrelRet : ChannelConfigRel D_0 j_0 realize
      {s with control := .term (.prim (.ret value))} answer :=
      hsRet.symm |> hrel
    have hrelVal :=
      channel_config_return D_0 j_0 hrelRet
    have hstepRet : ChannelInternalStep s
      {s with control := .value (.payload value)} := by
      have happ :
        ChannelInternalStep
          {s with control := .term (.prim (.ret value))}
          {s with control := .value (.payload value)} :=
          ChannelInternalStep.returnPrimitive (s := s)
          (value := value)
      exact hsRet.symm |> happ
    have hscopedVal : ChannelConfig.WellScoped
      {s with control := .value (.payload value)} :=
      ChannelInternalStep.preserve_wellScoped hstepRet hscoped
    have hval :=
      hVal (s := {s with control := .value (.payload value)})
      (arg := .payload value) rfl hs hok hargs hscopedVal
      hrelVal
    exact return_presentedChannelConfigCompleteness D_0 j_0 realize
      hc hrel hval
  | pauliX value =>
    exact
      pauliX_under_mixed_spine_of_value
      D_0 j_0 realize fns args hVal hc hs hok hargs hscoped hrel
  | measureZ _ _ =>
    exact False.elim hadmin

/-- List-of-frames completeness for a function spine over leftover
argument frames. -/
theorem mixed_spine_presented
{C : Type}
(D_0 : QDomain.{0})
(j_0 : IsContinuousLatticeProjection D_0.carrier

```

```

(QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
(realize : C -> HSemanticValue D_0 j_0)
(fns : List (Name x Term (QubitPrimitive C) x RuntimeEnv C))
(args : List (Term (QubitPrimitive C) x RuntimeEnv C))
(hok : MixedSpineOk fns args) (hargs : ArgumentFramesOk args) :
ValueUnderMixedSpine D_0 j_0 realize fns args /\
  (forall {s : ChannelConfig C} {code : Term (QubitPrimitive C)}
    {answer : HSemanticComp D_0 j_0},
    AdminNoApp code ->
    s.control = .term code ->
    s.stack = mixedStack fns args ->
    MixedSpineOk fns args ->
    ArgumentFramesOk args ->
    ChannelConfig.WellScoped s ->
    ChannelConfigRel D_0 j_0 realize s answer ->
    PresentedChannelConfigCompleteness D_0 j_0 realize s answer) := by
induction fns with
| nil => exact False.elim hok
| cons p rest ih =>
  rcases p with <x, body, clo>
  cases rest with
  | nil =>
    have hbody : BodyUnderArgs args.length body :=
      MixedSpineOk_singleton.mp hok
    have hval : ValueUnderMixedSpine D_0 j_0 realize
      [(x, body, clo)] args := by
      intro s arg answer hc hs _hok hargs' hscoped hrel
      have hs' : s.stack =
        .function (.closure x body clo) ::
          argumentStack args := by
        simpa [mixedStack] using hs
      exact
        value_under_function_argument_frames_presentedChannelConfigCompleteness
          D_0 j_0 realize args hargs' hc hs' hbody hscoped hrel
    exact <hval,
      fun {s} {code} {answer} =>
        admin_noapp_under_mixed_spine_of_value
          D_0 j_0 realize [(x, body, clo)] args hval>
  | cons q rest' =>
    have <hadminY, hokRest> :=
      (MixedSpineOk_cons_cons
        (x := x) (body := body) (clo := clo) (y := q)
        (rest := rest') (args := args)).mp hok
    obtain <ihVal, ihAdmin> := ih hokRest
    have hval : ValueUnderMixedSpine D_0 j_0 realize
      ((x, body, clo) :: q :: rest') args := by
      intro s arg answer hc hs _hok' hargs' hscoped hrel
      have hse :
        {s with
          control := .value arg
          stack :=
            .function (.closure x body clo) ::
              mixedStack (q :: rest') args} = s :=
        ChannelConfig.ext hc.symm rfl hs.symm rfl
      have hrel' : ChannelConfigRel D_0 j_0 realize
        {s with
          control := .value arg
          stack :=
            .function (.closure x body clo) ::
              mixedStack (q :: rest') args}
        answer :=
        hse.symm |> hrel
      have hrelBody :=

```

```

channel_config_beta D_0 j_0 (s := s) (x := x)
  (body := body) (closureEnv := clo) (arg := arg)
  (rest := mixedStack (q :: rest') args) hrel'
let sBody : ChannelConfig C :=
  {s with
    control := .term body
    env := RuntimeEnv.bind x arg clo
    stack := mixedStack (q :: rest') args}
have hstepBeta : ChannelInternalStep s sBody := by
  have happ :
    ChannelInternalStep
      {s with
        control := .value arg
        stack :=
          .function (.closure x body clo) ::
            mixedStack (q :: rest') args}
        sBody :=
          ChannelInternalStep.beta (s := s) (x := x)
          (body := body) (closureEnv := clo) (arg := arg)
          (rest := mixedStack (q :: rest') args)
    exact hxEq.symm |> happ
have hscopedBody : ChannelConfig.WellScoped sBody :=
  ChannelInternalStep.preserve_wellScoped hstepBeta hscoped
have hchild :=
  ihAdmin (s := sBody) (code := body) hadminY rfl rfl
  hokRest hargs' hscopedBody hrelBody
exact beta_presentedChannelConfigCompleteness D_0 j_0 realize
  (s := s) (x := x) (body := body) (closureEnv := clo)
  (arg := arg) (rest := mixedStack (q :: rest') args)
  hc hs hrel hchild
exact <hval,
  fun {s} {code} {answer} =>
    admin_noapp_under_mixed_spine_of_value
      D_0 j_0 realize ((x, body, clo) :: q :: rest') args
    hval>

theorem admin_noapp_under_mixed_spine_presentedChannelConfigCompleteness
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (fns : List (Name x Term (QubitPrimitive C) x RuntimeEnv C))
  (args : List (Term (QubitPrimitive C) x RuntimeEnv C))
  (hok : MixedSpineOk fns args) (hargs : ArgumentFramesOk args)
  {s : ChannelConfig C} {code : Term (QubitPrimitive C)}
  {answer : HSemanticComp D_0 j_0}
  (hadmin : AdminNoApp code)
  (hc : s.control = .term code)
  (hs : s.stack = mixedStack fns args)
  (hscoped : ChannelConfig.WellScoped s)
  (hrel : ChannelConfigRel D_0 j_0 realize s answer) :
  PresentedChannelConfigCompleteness D_0 j_0 realize s answer :=
  (mixed_spine_presented D_0 j_0 realize fns args hok hargs).2
  hadmin hc hs hok hargs hscoped hrel

/-- Inner `app (lam y bodyY) arg` under a mixed function/argument
spine. -/
theorem app_lam_under_mixed_spine_presentedChannelConfigCompleteness
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))

```

```

(realize : C -> HSemanticValue D_0 j_0)
(fns : List (Name x Term (QubitPrimitive C) x RuntimeEnv C))
(args : List (Term (QubitPrimitive C) x RuntimeEnv C))
(hok : MixedSpineOk fns args) (hargs : ArgumentFramesOk args)
{ s : ChannelConfig C } { y : Name }
{ bodyY arg : Term (QubitPrimitive C) } { answer : HSemanticComp D_0 j_0 }
(hc : s.control = .term (.app (.lam y bodyY) arg))
(hs : s.stack = mixedStack fns args)
(hadminY : AdminNoApp bodyY) (hadminArg : AdminNoApp arg)
(hscoped : ChannelConfig.WellScoped s)
(hrel : ChannelConfigRel D_0 j_0 realize s answer) :
PresentedChannelConfigCompleteness D_0 j_0 realize s answer := by
have hsApp :
  { s with control := .term (.app (.lam y bodyY) arg) } = s :=
  ChannelConfig.ext hc.symm rfl rfl rfl
have hrelApp : ChannelConfigRel D_0 j_0 realize
  { s with control := .term (.app (.lam y bodyY) arg) } answer :=
  hsApp.symm |> hrel
have hrelLam :=
  channel_config_application D_0 j_0 (s := s)
  (fn := .lam y bodyY) (arg := arg) hrelApp
have hrelClo :=
  channel_config_lambda D_0 j_0
  (s := { s with stack := .argument arg s.env :: s.stack })
  hrelLam
have hrelArg :=
  channel_config_evaluateArgument D_0 j_0
  (s :=
    { s with
      control := .value (.closure y bodyY s.env)
      stack := .argument arg s.env :: s.stack })
  (fn := .closure y bodyY s.env) (arg := arg)
  (callEnv := s.env) (rest := s.stack) hrelClo
let sArg : ChannelConfig C :=
  { s with
    control := .term arg
    stack := .function (.closure y bodyY s.env) :: s.stack }
have hstepApp : ChannelInternalStep s
  { s with
    control := .term (.lam y bodyY)
    stack := .argument arg s.env :: s.stack } := by
have happ :
  ChannelInternalStep
  { s with control := .term (.app (.lam y bodyY) arg) }
  { s with
    control := .term (.lam y bodyY)
    stack := .argument arg s.env :: s.stack } :=
  ChannelInternalStep.application (s := s)
  (fn := .lam y bodyY) (arg := arg)
exact hsApp.symm |> happ
have hstepLam : ChannelInternalStep
  { s with
    control := .term (.lam y bodyY)
    stack := .argument arg s.env :: s.stack }
  { s with
    control := .value (.closure y bodyY s.env)
    stack := .argument arg s.env :: s.stack } :=
  ChannelInternalStep.lambda
  (s := { s with stack := .argument arg s.env :: s.stack })
  (x := y) (body := bodyY)
have hstepArg : ChannelInternalStep
  { s with
    control := .value (.closure y bodyY s.env)

```

Lean 4 source (lines 2001–2400)

```

    stack := .argument arg s.env :: s.stack}
  sArg :=
  ChannelInternalStep.evaluateArgument
  (s :=
    {s with
      control := .value (.closure y bodyY s.env)
      stack := .argument arg s.env :: s.stack})
  (fn := .closure y bodyY s.env) (arg := arg)
  (callEnv := s.env) (rest := s.stack)
have hscopedArg : ChannelConfig.WellScoped sArg :=
  ChannelInternalStep.preserve_wellScoped hstepArg
  (ChannelInternalStep.preserve_wellScoped hstepLam
    (ChannelInternalStep.preserve_wellScoped hstepApp hscoped))
have hsArg :
  sArg.stack = mixedStack ((y, bodyY, s.env) :: fns) args := by
  simp [sArg, hs, mixedStack]
have hokFull : MixedSpineOk ((y, bodyY, s.env) :: fns) args :=
  MixedSpineOk.cons hok.ne_nil hadminY hok
have harg :
  PresentedChannelConfigCompleteness D_0 j_0 realize sArg answer :=
  admin_noapp_under_mixed_spine_presentedChannelConfigCompleteness
  D_0 j_0 realize ((y, bodyY, s.env) :: fns) args hokFull hargs
  (s := sArg) (code := arg) hadminArg rfl hsArg hscopedArg
  (by
    change ChannelConfigRel D_0 j_0 realize
      {s with
        control := .term arg
        env := s.env
        stack :=
          .function (.closure y bodyY s.env) :: s.stack}
      -
      exact hrelArg)
exact stacked_lam_app_presentedChannelConfigCompleteness D_0 j_0 realize
  (s := s) (x := y) (body := bodyY) (arg := arg) hc hrel harg

/-- Closed mixed
`app (app (lam x (lam y body)) (app (lam z bodyZ) arg)) arg2`. -/
theorem closed_mixed_lam_app_lam_admin_noapp_presented_channelTreeCompleteness
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (x y z : Name) (body bodyZ arg arg2 : Term (QubitPrimitive C))
  (hclosed : Closed
    (.app (.app (.lam x (.lam y body)) (.app (.lam z bodyZ) arg))
      arg2))
  (hnoapp : NoApp body)
  (hadminZ : AdminNoApp bodyZ)
  (hadminArg : AdminNoApp arg) (hadmin2 : AdminNoApp arg2)
  (quantum : NormalizedDensity 2)
  (semanticEnv : Env (HSemanticValue D_0 j_0)) :
  PresentedChannelTreeCompleteness D_0 j_0 realize
  (initialChannelConfig
    (.app (.app (.lam x (.lam y body)) (.app (.lam z bodyZ) arg))
      arg2)
    quantum)
  (interp (hardwarePrimitive D_0 j_0 realize)
    (.app (.app (.lam x (.lam y body)) (.app (.lam z bodyZ) arg))
      arg2)
    semanticEnv) := by
let innerApp : Term (QubitPrimitive C) := .app (.lam z bodyZ) arg

```

```

let inner : Term (QubitPrimitive C) :=
  .app (.lam x (.lam y body)) innerApp
let code : Term (QubitPrimitive C) := .app inner arg2
let s : ChannelConfig C := initialChannelConfig code quantum
have hc : s.control = .term code := rfl
have hrel :=
  initialChannelConfig_related D_0 j_0 realize code quantum semanticEnv
have hscoped :=
  initialChannelConfig_wellScoped hclosed quantum
have hsApp :
  {s with control := .term (.app inner arg2)} = s :=
  ChannelConfig.ext hc.symm rfl rfl rfl
have hrelApp : ChannelConfigRel D_0 j_0 realize
  {s with control := .term (.app inner arg2)}
  (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv) :=
  hsApp.symm |> hrel
have hrelInner :=
  channel_config_application D_0 j_0 (s := s) (fn := inner)
  (arg := arg2) hrelApp
let sInner : ChannelConfig C :=
  {s with
    control := .term inner
    stack := .argument arg2 s.env :: s.stack}
have hstepApp : ChannelInternalStep s sInner := by
  have happ :
    ChannelInternalStep
    {s with control := .term (.app inner arg2)} sInner :=
    ChannelInternalStep.application (s := s) (fn := inner)
    (arg := arg2)
  exact hsApp.symm |> happ
have hscopedInner : ChannelConfig.WellScoped sInner :=
  ChannelInternalStep.preserve_wellScoped hstepApp hscoped
have hsInner : sInner.stack = argumentStack [(arg2, s.env)] := by
  simp [sInner, s, initialChannelConfig, ofConfig, initialConfig]
have hsApp1 :
  {sInner with
    control := .term (.app (.lam x (.lam y body)) innerApp)} =
  sInner :=
  ChannelConfig.ext rfl rfl rfl rfl
have hrelApp1 : ChannelConfigRel D_0 j_0 realize
  {sInner with
    control := .term (.app (.lam x (.lam y body)) innerApp)}
  (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv) := by
  change ChannelConfigRel D_0 j_0 realize
  {s with
    control := .term inner
    env := s.env
    stack := .argument arg2 s.env :: s.stack}
  -
  exact hrelInner
have hrelLam :=
  channel_config_application D_0 j_0 (s := sInner)
  (fn := .lam x (.lam y body)) (arg := innerApp) hrelApp1
have hrelClo :=
  channel_config_lambda D_0 j_0
  (s :=
    {sInner with
      stack := .argument innerApp sInner.env :: sInner.stack})
  hrelLam
have hrelArg :=
  channel_config_evaluateArgument D_0 j_0
  (s :=
    {sInner with

```

```

        control := .value (.closure x (.lam y body) sInner.env)
        stack := .argument innerApp sInner.env :: sInner.stack})
    (fn := .closure x (.lam y body) sInner.env) (arg := innerApp)
    (callEnv := sInner.env) (rest := sInner.stack) hrelClo
let sArg : ChannelConfig C :=
  {sInner with
    control := .term innerApp
    stack :=
      .function (.closure x (.lam y body) sInner.env) ::
        sInner.stack}
have hstepApp1 : ChannelInternalStep sInner
  {sInner with
    control := .term (.lam x (.lam y body))
    stack := .argument innerApp sInner.env :: sInner.stack} := by
  have happ :
    ChannelInternalStep
      {sInner with
        control := .term (.app (.lam x (.lam y body)) innerApp)}
      {sInner with
        control := .term (.lam x (.lam y body))
        stack := .argument innerApp sInner.env :: sInner.stack} :=
    ChannelInternalStep.application (s := sInner)
    (fn := .lam x (.lam y body)) (arg := innerApp)
  exact hsApp1.symm |> happ
have hstepLam : ChannelInternalStep
  {sInner with
    control := .term (.lam x (.lam y body))
    stack := .argument innerApp sInner.env :: sInner.stack}
  {sInner with
    control := .value (.closure x (.lam y body) sInner.env)
    stack := .argument innerApp sInner.env :: sInner.stack} :=
  ChannelInternalStep.lambda
  (s :=
    {sInner with
      stack := .argument innerApp sInner.env :: sInner.stack})
  (x := x) (body := .lam y body)
have hstepArg : ChannelInternalStep
  {sInner with
    control := .value (.closure x (.lam y body) sInner.env)
    stack := .argument innerApp sInner.env :: sInner.stack}
  sArg :=
  ChannelInternalStep.evaluateArgument
  (s :=
    {sInner with
      control := .value (.closure x (.lam y body) sInner.env)
      stack := .argument innerApp sInner.env :: sInner.stack})
  (fn := .closure x (.lam y body) sInner.env) (arg := innerApp)
  (callEnv := sInner.env) (rest := sInner.stack)
have hscopedArg : ChannelConfig.WellScoped sArg :=
  ChannelInternalStep.preserve_wellScoped hstepArg
  (ChannelInternalStep.preserve_wellScoped hstepLam
    (ChannelInternalStep.preserve_wellScoped hstepApp1
      hscopedInner))
have hsArg :
  sArg.stack =
    mixedStack [(x, .lam y body, s.env)] [(arg2, s.env)] := by
  simp [sArg, sInner, s, initialChannelConfig, ofConfig,
    initialConfig, mixedStack]
have hok : MixedSpineOk [(x, .lam y body, s.env)] [(arg2, s.env)] := by
  simpa [MixedSpineOk, BodyUnderArgs] using hnoapp
have hargs : ArgumentFramesOk [(arg2, s.env)] := by
  intro p hp
  simp at hp

```



```

cases hp
exact hadmin2
have hinnerApp :
  PresentedChannelConfigCompleteness D_0 j_0 realize sArg
    (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv) :=
app_lam_under_mixed_spine_presentedChannelConfigCompleteness
  D_0 j_0 realize [(x, .lam y body, s.env)] [(arg2, s.env)]
hok hargs (s := sArg) (y := z) (bodyY := bodyZ) (arg := arg)
rfl hsArg hadminZ hadminArg hscopedArg
(by
  change ChannelConfigRel D_0 j_0 realize
    {sInner with
      control := .term innerApp
      env := sInner.env
      stack :=
        .function (.closure x (.lam y body) sInner.env) ::
          sInner.stack}

    -
    exact hrelArg)
have hinner :
  PresentedChannelConfigCompleteness D_0 j_0 realize sInner
    (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv) :=
stacked_lam_app_presentedChannelConfigCompleteness D_0 j_0 realize
  (s := sInner) (x := x) (body := .lam y body) (arg := innerApp)
rfl
(by
  change ChannelConfigRel D_0 j_0 realize
    {s with
      control := .term inner
      env := s.env
      stack := .argument arg2 s.env :: s.stack}

    -
    exact hrelInner)
hinnerApp
exact (application_presentedChannelConfigCompleteness D_0 j_0 realize
  (s := s) (fn := inner) (arg := arg2) hc hrel hinner).complete

/-- Token adequacy for closed mixed
`app (app (lam x (lam y body)) (app (lam z bodyZ) arg)) arg2`. -/
theorem closed_mixed_lam_app_lam_admin_noapp_presented_token_adequacy
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEnternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (x y z : Name) (body bodyZ arg arg2 : Term (QubitPrimitive C))
  (hclosed : Closed
    (.app (.app (.lam x (.lam y body)) (.app (.lam z bodyZ) arg))
      arg2))
  (hnoapp : NoApp body)
  (hadminZ : AdminNoApp bodyZ)
  (hadminArg : AdminNoApp arg) (hadmin2 : AdminNoApp arg2)
  (quantum : NormalizedDensity 2)
  (semanticEnv : Env (HSemanticValue D_0 j_0))
  (selectors : List Bool)
  (? : HSemanticValue D_0 j_0 -> FiniteInstrumentComp 2 PUnit.{1})
  (k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2))
  (hk : forall d, k d = (? d).satisfiedTTTheory resultCode)
  (i : Nat) (token : TTObservationToken 2) :
token in HardwareAdequacy.selectPath selectors
  (interp (hardwarePrimitive D_0 j_0 realize)
    (.app (.app (.lam x (.lam y body))
      (.app (.lam z bodyZ) arg)) arg2)

```

```

      semanticEnv) i k <->
exists fuel, exists (tree : ChannelTree C
  (initialChannelConfig
    (.app (.app (.lam x (.lam y body))
      (.app (.lam z bodyZ) arg)) arg2)
    quantum))
(R : ChannelTreeRealization D_0 j_0 realize tree),
tree.depth <= fuel /\
ResultAvailable tree selectors i /\
TTObservationToken.Holds resultCode token
  ((restrictedInstrument D_0 j_0 realize tree R selectors i).bind
    ?) :=
presented_channel_tree_token_adequacy_iff D_0 j_0 realize
  (initialChannelConfig
    (.app (.app (.lam x (.lam y body)) (.app (.lam z bodyZ) arg))
      arg2)
    quantum)
  (interp (hardwarePrimitive D_0 j_0 realize)
    (.app (.app (.lam x (.lam y body)) (.app (.lam z bodyZ) arg))
      arg2)
    semanticEnv)
  (closed_mixed_lam_app_lam_admin_noapp_presented_channelTreeCompleteness
    D_0 j_0 realize x y z body bodyZ arg arg2 hclosed hnoapp
    hadminZ hadminArg hadmin2 quantum semanticEnv)
  selectors ? k hk i token

/-- A lambda under one leftover argument frame over a residual
function-frame spine. -/
theorem lam_under_argument_function_spine_presentedChannelConfigCompleteness
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (rest : List (Name x Term (QubitPrimitive C) x RuntimeEnv C))
  (hok : FunctionSpineOk rest)
  {s : ChannelConfig C} {x : Name}
  {body arg : Term (QubitPrimitive C)} {callEnv : RuntimeEnv C}
  {answer : HSemanticComp D_0 j_0}
  (hc : s.control = .term (.lam x body))
  (hs : s.stack = .argument arg callEnv :: functionStack rest)
  (hadminBody : AdminNoApp body) (hadminArg : AdminNoApp arg)
  (hscoped : ChannelConfig.WellScoped s)
  (hrel : ChannelConfigRel D_0 j_0 realize s answer) :
  PresentedChannelConfigCompleteness D_0 j_0 realize s answer := by
have hSLam :
  {s with control := .term (.lam x body)} = s :=
  ChannelConfig.ext hc.symm rfl rfl rfl
have hrelLam : ChannelConfigRel D_0 j_0 realize
  {s with control := .term (.lam x body)} answer :=
  hSLam.symm |> hrel
have hrelClo :=
  channel_config_lambda D_0 j_0 (s := s) hrelLam
have hsrcClo :
  {s with control := .value (.closure x body s.env)} =
  {s with
    control := .value (.closure x body s.env)
    stack := .argument arg callEnv :: functionStack rest} :=
  ChannelConfig.ext rfl rfl hs rfl
have hrelFn :=
  channel_config_evaluateArgument D_0 j_0
  (s := {s with control := .value (.closure x body s.env)})
  (fn := .closure x body s.env) (arg := arg)

```

```

    (callEnv := callEnv) (rest := functionStack rest)
    (hsrcClo |> hrelClo)
have hstepLam : ChannelInternalStep s
  {s with control := .value (.closure x body s.env)} := by
  have happ :
    ChannelInternalStep
      {s with control := .term (.lam x body)}
      {s with control := .value (.closure x body s.env)} :=
    ChannelInternalStep.lambda (s := s) (x := x) (body := body)
  exact hslam.symm |> happ
have hstepArg : ChannelInternalStep
  {s with control := .value (.closure x body s.env)}
  {s with
    control := .term arg
    env := callEnv
    stack :=
      .function (.closure x body s.env) :: functionStack rest} := by
  have happ :
    ChannelInternalStep
      {s with
        control := .value (.closure x body s.env)
        stack := .argument arg callEnv :: functionStack rest}
      {s with
        control := .term arg
        env := callEnv
        stack :=
          .function (.closure x body s.env) ::
            functionStack rest} :=
    ChannelInternalStep.evaluateArgument
      (s := {s with control := .value (.closure x body s.env)})
      (fn := .closure x body s.env) (arg := arg)
      (callEnv := callEnv) (rest := functionStack rest)
  exact hsrcClo.symm |> happ
have hscopedFn : ChannelConfig.WellScoped
  {s with
    control := .term arg
    env := callEnv
    stack :=
      .function (.closure x body s.env) :: functionStack rest} :=
  ChannelInternalStep.preserve_wellScoped hstepArg
  (ChannelInternalStep.preserve_wellScoped hstepLam hscoped)
have hokFull : FunctionSpineOk ((x, body, s.env) :: rest) :=
  FunctionSpineOk.cons hok.ne_nil hadminBody hok
have hsFn :
  ({s with
    control := .term arg
    env := callEnv
    stack :=
      .function (.closure x body s.env) ::
        functionStack rest}).stack =
  functionStack ((x, body, s.env) :: rest) := by
  simp
have harg :
  PresentedChannelConfigCompleteness D_0 j_0 realize
    {s with
      control := .term arg
      env := callEnv
      stack :=
        .function (.closure x body s.env) :: functionStack rest}
    answer :=
  admin_noapp_under_function_spine_presentedChannelConfigCompleteness
    D_0 j_0 realize ((x, body, s.env) :: rest) hokFull
  hadminArg rfl hsFn hscopedFn hrelFn

```

```

have hClo :=
  evaluateArgument_presentedChannelConfigCompleteness D_0 j_0 realize
    (s := {s with control := .value (.closure x body s.env)})
    (fn := .closure x body s.env) (arg := arg)
    (callEnv := callEnv) (rest := functionStack rest)
  rfl hs hrelClo harg
exact lambda_presentedChannelConfigCompleteness D_0 j_0 realize
  hc hrel hClo

/-- Value completeness under one function frame, one leftover argument
frame, and a residual function-frame spine. -/
def ValueUnderFunctionArgumentFunctionSpine {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (rest : List (Name x Term (QubitPrimitive C) x RuntimeEnv C))
  (y : Name) (bodyY arg2 : Term (QubitPrimitive C))
  (cloY callEnv : RuntimeEnv C) : Prop :=
forall {s : ChannelConfig C} {arg : RuntimeValue C}
  {answer : HSemanticComp D_0 j_0},
  s.control = .value arg ->
  s.stack =

    .function (.closure y bodyY cloY) ::
      .argument arg2 callEnv :: functionStack rest ->
  ChannelConfig.WellScoped s ->
  ChannelConfigRel D_0 j_0 realize s answer ->
  PresentedChannelConfigCompleteness D_0 j_0 realize s answer

theorem value_under_function_argument_function_spine_presentedChannelConfigCompleteness
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (rest : List (Name x Term (QubitPrimitive C) x RuntimeEnv C))
  (hok : FunctionSpineOk rest)
  {s : ChannelConfig C} {arg : RuntimeValue C}
  {y z : Name} {body arg2 : Term (QubitPrimitive C)}
  {cloY callEnv : RuntimeEnv C} {answer : HSemanticComp D_0 j_0}
  (hc : s.control = .value arg)
  (hs : s.stack =
    [.function (.closure y (.lam z body) cloY),
     .argument arg2 callEnv] ++ functionStack rest)
  (hadminBody : AdminNoApp body) (hadminArg2 : AdminNoApp arg2)
  (hscoped : ChannelConfig.WellScoped s)
  (hrel : ChannelConfigRel D_0 j_0 realize s answer) :
  PresentedChannelConfigCompleteness D_0 j_0 realize s answer := by
have hEq :
  {s with
    control := .value arg
    stack :=
      .function (.closure y (.lam z body) cloY) ::
        .argument arg2 callEnv :: functionStack rest} = s :=
  ChannelConfig.ext hc.symm rfl (by simp using hs.symm) rfl
have hrel' : ChannelConfigRel D_0 j_0 realize
  {s with
    control := .value arg
    stack :=
      .function (.closure y (.lam z body) cloY) ::
        .argument arg2 callEnv :: functionStack rest}

```

```

    answer :=
    hsEq.symm |> hrel
have hrelBody :=
  channel_config_beta D_0 j_0 (s := s) (x := y)
    (body := .lam z body) (closureEnv := cloY) (arg := arg)
    (rest := .argument arg2 callEnv :: functionStack rest) hrel'
let sBody : ChannelConfig C :=
  {s with
    control := .term (.lam z body)
    env := RuntimeEnv.bind y arg cloY
    stack := .argument arg2 callEnv :: functionStack rest}
have hstepBeta : ChannelInternalStep s sBody := by
  have happ :
    ChannelInternalStep
      {s with
        control := .value arg
        stack :=
          .function (.closure y (.lam z body) cloY) ::
            .argument arg2 callEnv :: functionStack rest}
        sBody :=
          ChannelInternalStep.beta (s := s) (x := y)
            (body := .lam z body) (closureEnv := cloY) (arg := arg)
            (rest := .argument arg2 callEnv :: functionStack rest)
      exact hsEq.symm |> happ
have hscopedBody : ChannelConfig.WellScoped sBody :=
  ChannelInternalStep.preserve_wellScoped hstepBeta hscoped
have hchild :=
  lam_under_argument_function_spine_presentedChannelConfigCompleteness
    D_0 j_0 realize rest hok (s := sBody) (x := z) (body := body)
    (arg := arg2) (callEnv := callEnv) rfl rfl hadminBody hadminArg2
  hscopedBody hrelBody
have hs' : s.stack =
  .function (.closure y (.lam z body) cloY) ::
    .argument arg2 callEnv :: functionStack rest := by
  simpa using hs
exact beta_presentedChannelConfigCompleteness D_0 j_0 realize
  (s := s) (x := y) (body := .lam z body) (closureEnv := cloY)
  (arg := arg) (rest := .argument arg2 callEnv :: functionStack rest)
  hc hs' hrel hchild

theorem pauliX_under_function_argument_function_spine_of_value
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (rest : List (Name x Term (QubitPrimitive C) x RuntimeEnv C))
  {y : Name} {bodyY arg2 : Term (QubitPrimitive C)}
  {cloY callEnv : RuntimeEnv C}
  (hVal : ValueUnderFunctionArgumentFunctionSpine D_0 j_0 realize
    rest y bodyY arg2 cloY callEnv)
  {s : ChannelConfig C} {value : C} {answer : HSemanticComp D_0 j_0}
  (hc : s.control = .term (.prim (.pauliX value)))
  (hs : s.stack =
    .function (.closure y bodyY cloY) ::
      .argument arg2 callEnv :: functionStack rest)
  (hscoped : ChannelConfig.WellScoped s)
  (hrel : ChannelConfigRel D_0 j_0 realize s answer) :
  PresentedChannelConfigCompleteness D_0 j_0 realize s answer := by
have hsPx :
  {s with control := .term (.prim (.pauliX value))} = s :=
  ChannelConfig.ext hc.symm rfl rfl rfl
obtain <semanticEnv, kStack, henv, hstack, rfl> :=

```

```

channelConfigRel_term_inv D_0 j_0 hc hrel
let sVal : ChannelConfig C :=
  {s with
    control := .value (.payload value)
    quantum := applyOperation Qubit.pauliXOp s.quantum}
have hstep : ChannelInternalStep s sVal := by
  have happ :
    ChannelInternalStep
      {s with control := .term (.prim (.pauliX value))}
      sVal :=
        ChannelInternalStep.pauliXPrimitive (s := s) (value := value)
  exact hsPx.symm |> happ
have hscopedVal : ChannelConfig.WellScoped sVal :=
  ChannelInternalStep.preserve_wellScoped hstep hscoped
have hrelVal : ChannelConfigRel D_0 j_0 realize sVal
  (kStack
    (semanticUnit (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0) (realize value))) :=
  <semanticUnit (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0) (realize value),
    kStack,
    ControlRel.value _ _ s.env
    (payload_related D_0 j_0 realize value),
    hstack, rfl>
have hval :=
  hVal (s := sVal) (arg := .payload value) rfl hs hscopedVal hrelVal
refine
  { related := hrel
    complete := ?_ }
constructor
intro selectors i ? k? hk
have hchildEq :=
  hval.complete.selected_result_eq_channelTree_sup_presented
  selectors i ? k? hk
have hden :
  interp (hardwarePrimitive D_0 j_0 realize)
    (.prim (.pauliX value)) semanticEnv =
    taggedEmbed
      (FiniteInstrumentComp.ofOperation Qubit.pauliXOp
        (realize value)) := by
  simp [hardwarePrimitive_pauliX]
have hne : s.stack != [] := by
  rw [hs]
  exact List.cons_ne_nil _ _
let unitVal : HSemanticComp D_0 j_0 :=
  semanticUnit (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0) (realize value)
let opVal : HSemanticComp D_0 j_0 :=
  taggedEmbed
    (FiniteInstrumentComp.ofOperation Qubit.pauliXOp
      (realize value))
have hchildCoord :
  kStack unitVal (HardwareAdequacy.encodePath selectors i) k? =
  sSup (channelTreeResults D_0 j_0 realize sVal selectors i
    k?) := by
  have hsel :
    HardwareAdequacy.selectPath selectors (kStack unitVal) i k? =
    kStack unitVal (HardwareAdequacy.encodePath selectors i)
    k? :=
    congrArg (fun f => f k?)
    (HardwareAdequacy.selectPath_apply_encode selectors
      (kStack unitVal) i)
  exact hsel.symm.trans hchildEq

```

```

have hselParent :
  HardwareAdequacy.selectPath selectors (kStack opVal) i k? =
    kStack opVal (HardwareAdequacy.encodePath selectors i) k? :=
  CongrArg (fun f => f k?)
  (HardwareAdequacy.selectPath_apply_encode selectors
    (kStack opVal) i)
have hop :
  kStack opVal (HardwareAdequacy.encodePath selectors i) k? =
    embed (FiniteInstrumentComp.ofOperation Qubit.pauliXOp
      (realize value))
      (ScottMap.const
        (kStack unitVal (HardwareAdequacy.encodePath selectors i)
          k?)) :=
  stackRel_ofOperation_eval D_0 j_0 hstack hne
  Qubit.pauliXOp (realize value)
  (HardwareAdequacy.encodePath selectors i) k?
rw [hden, hselParent, hop, hchildCoord, embed_ofOperation_const_sSup]
apply le_antisymm
* apply sSup_le
  rintro T <r, <fuel, child, R, hdepth, rfl>, rfl>
  apply le_sSup
  refine <fuel + 1, ChannelTree.internal hstep child,
    wrapInternalRealization D_0 j_0 realize hstep child R, ?_, ?_>
  * change child.depth + 1 <= fuel + 1
  omega
  * exact
    (restrictedResult_internal_pauliX D_0 j_0 realize hstep hc
      child
      (wrapInternalRealization D_0 j_0 realize hstep child R)
      selectors i ? k? hk).symm
* apply sSup_le
  rintro T <_, tree, R, _, rfl>
  cases tree with
  | terminal hterm =>
    cases hterm.control_eq.symm.trans hc
  | @internal _ t' h next =>
    have ht : t' = sVal :=
      ChannelInternalStep.eq_config_of_pauliX h hc
    subst t'
    rw [restrictedResult_internal_pauliX D_0 j_0 realize h hc
      next R selectors i ? k? hk]
    apply le_sSup
    refine <restrictedResult D_0 j_0 realize next
      (internalChildRealization D_0 j_0 realize h next R)
      selectors i k?,
      <next.depth, next,
        internalChildRealization D_0 j_0 realize h next R,
        le_rfl, rfl>, rfl>
  | external _ hex _ =>
    exact False.elim (ChannelExternalStep.not_prim hex hc)
  | probability _ _ _ =>
    cases hc
  | probabilityZero _ =>
    cases hc
  | probabilityOne _ =>
    cases hc
  | measurement _ _ =>
    cases hc

theorem admin_noapp_under_function_argument_function_spine_of_value
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier

```

```

    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (rest : List (Name x Term (QubitPrimitive C) x RuntimeEnv C))
  {y : Name} {bodyY arg2 : Term (QubitPrimitive C)}
  {cloY callEnv : RuntimeEnv C}
  (hVal : ValueUnderFunctionArgumentFunctionSpine D_0 j_0 realize
    rest y bodyY arg2 cloY callEnv)
  {s : ChannelConfig C} {code : Term (QubitPrimitive C)}
  {answer : HSemanticComp D_0 j_0}
  (hadmin : AdminNoApp code)
  (hc : s.control = .term code)
  (hs : s.stack =
    .function (.closure y bodyY cloY) ::
    .argument arg2 callEnv :: functionStack rest)
  (hscoped : ChannelConfig.WellScoped s)
  (hrel : ChannelConfigRel D_0 j_0 realize s answer) :
  PresentedChannelConfigCompleteness D_0 j_0 realize s answer := by
induction code generalizing s answer with
| var z =>
  have hctl := hscoped.left
  rw [hc] at hctl
  obtain <v, hlookup> := hctl.right z (by simp [free])
  have hsVar :
    {s with control := .term (.var z)} = s :=
    ChannelConfig.ext hc.symm rfl rfl rfl
  have hrelVar : ChannelConfigRel D_0 j_0 realize
    {s with control := .term (.var z)} answer :=
    hsVar.symm |> hrel
  have hrelVal :=
    channel_config_variable D_0 j_0 hlookup hrelVar
  have hscopedVal : ChannelConfig.WellScoped
    {s with control := .value v} :=
    <<hctl.left, hctl.left z v hlookup>, hscoped.right>
  have hval :=
    hVal (s := {s with control := .value v}) (arg := v)
    rfl hs hscopedVal hrelVal
  exact variable_presentedChannelConfigCompleteness D_0 j_0 realize
    hc hlookup hrel hval
| app _ _ =>
  exact False.elim hadmin
| lam w M _ih =>
  have hsLam :
    {s with control := .term (.lam w M)} = s :=
    ChannelConfig.ext hc.symm rfl rfl rfl
  have hrelLam : ChannelConfigRel D_0 j_0 realize
    {s with control := .term (.lam w M)} answer :=
    hsLam.symm |> hrel
  have hrelVal :=
    channel_config_lambda D_0 j_0 (s := s) hrelLam
  have hstepLam : ChannelInternalStep s
    {s with control := .value (.closure w M s.env)} := by
  have happ :
    ChannelInternalStep
    {s with control := .term (.lam w M)}
    {s with control := .value (.closure w M s.env)} :=
    ChannelInternalStep.lambda (s := s) (x := w) (body := M)
  exact hsLam.symm |> happ
  have hscopedVal : ChannelConfig.WellScoped
    {s with control := .value (.closure w M s.env)} :=
    ChannelInternalStep.preserve_wellScoped hstepLam hscoped
  have hval :=
    hVal (s := {s with control := .value (.closure w M s.env)})
    (arg := .closure w M s.env) rfl hs hscopedVal hrelVal

```



```

    exact lambda_presentedChannelConfigCompleteness D_0 j_0 realize
      hc hrel hval
| recLam self w M _ih =>
  have hsRec :
    {s with control := .term (.recLam self w M)} = s :=
    ChannelConfig.ext hc.symm rfl rfl rfl
  have hrelRec : ChannelConfigRel D_0 j_0 realize
    {s with control := .term (.recLam self w M)} answer :=
    hsRec.symm |> hrel
  have hrelVal :=
    channel_config_recursive D_0 j_0 (s := s) hrelRec
  have hstepRec : ChannelInternalStep s
    {s with control := .value (.recClosure self w M s.env)} := by
  have happ :
    ChannelInternalStep
    {s with control := .term (.recLam self w M)}
    {s with
      control := .value (.recClosure self w M s.env)} :=
    ChannelInternalStep.recursive (s := s) (self := self)
      (arg := w) (body := M)
  exact hsRec.symm |> happ
  have hscopedVal : ChannelConfig.WellScoped
    {s with control := .value (.recClosure self w M s.env)} :=
    ChannelInternalStep.preserve_wellScoped hstepRec hscoped
  have hval :=
    hVal
    (s :=
      {s with control := .value (.recClosure self w M s.env)})
    (arg := .recClosure self w M s.env) rfl hs hscopedVal hrelVal
  exact recLam_presentedChannelConfigCompleteness D_0 j_0 realize
    hc hrel hval
| intern left right ihL ihR =>
  have <hnaL, hnaR> := hadmin
  have hscopedL :=
    wellScoped_term_child (child := left) hc hscoped
    (fun z hz => by simp [free, hz])
  have hscopedR :=
    wellScoped_term_child (child := right) hc hscoped
    (fun z hz => by simp [free, hz])
  refine intern_related_presentedChannelConfigCompleteness
    D_0 j_0 realize hc hrel ?_ ?_
  * intro semanticEnv k henv hstack
    exact ihL hnaL (s := {s with control := .term left}) rfl hs
      hscopedL
    <interp (hardwarePrimitive D_0 j_0 realize) left semanticEnv, k,
      ControlRel.term left s.env semanticEnv henv, hstack, rfl>
  * intro semanticEnv k henv hstack
    exact ihR hnaR (s := {s with control := .term right}) rfl hs
      hscopedR
    <interp (hardwarePrimitive D_0 j_0 realize) right semanticEnv, k,
      ControlRel.term right s.env semanticEnv henv, hstack, rfl>
| extern _ _ _ =>
  exact False.elim hadmin
| prob p left right ihL ihR =>
  have <hnaL, hnaR> := hadmin
  have hscopedL :=
    wellScoped_term_child (child := left) hc hscoped
    (fun z hz => by simp [free, hz])
  have hscopedR :=
    wellScoped_term_child (child := right) hc hscoped
    (fun z hz => by simp [free, hz])
  refine prob_related_presentedChannelConfigCompleteness
    D_0 j_0 realize hc hrel ?_ ?_

```

```

* intro semanticEnv k quantum henv hstack
exact ihL hnaL
  (s := {s with control := .term left, quantum := quantum})
  rfl hs <hscopedL.left, hscopedL.right>
  <interp (hardwarePrimitive D_0 j_0 realize) left semanticEnv, k,
    ControlRel.term left s.env semanticEnv henv, hstack, rfl>
* intro semanticEnv k quantum henv hstack
exact ihR hnaR
  (s := {s with control := .term right, quantum := quantum})
  rfl hs <hscopedR.left, hscopedR.right>
  <interp (hardwarePrimitive D_0 j_0 realize) right semanticEnv, k,
    ControlRel.term right s.env semanticEnv henv, hstack, rfl>
| prim prim =>
  cases prim with
| ret value =>
  have hsRet :
    {s with control := .term (.prim (.ret value))} = s :=
    ChannelConfig.ext hc.symm rfl rfl rfl
  have hrelRet : ChannelConfigRel D_0 j_0 realize
    {s with control := .term (.prim (.ret value))} answer :=
    hsRet.symm |> hrel
  have hrelVal :=
    channel_config_return D_0 j_0 hrelRet
  have hstepRet : ChannelInternalStep s
    {s with control := .value (.payload value)} := by
  have happ :
    ChannelInternalStep
      {s with control := .term (.prim (.ret value))}
      {s with control := .value (.payload value)} :=
    ChannelInternalStep.returnPrimitive (s := s)
      (value := value)
  exact hsRet.symm |> happ
  have hscopedVal : ChannelConfig.WellScoped
    {s with control := .value (.payload value)} :=
    ChannelInternalStep.preserve_wellScoped hstepRet hscoped
  have hval :=
    hVal (s := {s with control := .value (.payload value)})
      (arg := .payload value) rfl hs hscopedVal hrelVal
  exact return_presentedChannelConfigCompleteness D_0 j_0 realize
    hc hrel hval
| pauliX value =>
  exact
    pauliX_under_function_argument_function_spine_of_value
      D_0 j_0 realize rest hVal hc hs hscoped hrel
| measureZ _ _ =>
  exact False.elim hadmin

```

Lean 4 source (lines 2801–3200)

```

theorem admin_noapp_under_function_argument_function_spine_presentedChannelConfigCompleteness
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (rest : List (Name x Term (QubitPrimitive C) x RuntimeEnv C))
  (hok : FunctionSpineOk rest)
  {s : ChannelConfig C} {code : Term (QubitPrimitive C)}
  {y z : Name} {body arg2 : Term (QubitPrimitive C)}
  {cloY callEnv : RuntimeEnv C} {answer : HSemanticComp D_0 j_0}
  (hadmin : AdminNoApp code)
  (hc : s.control = .term code)
  (hs : s.stack =
    [.function (.closure y (.lam z body) cloY),

```

```

        .argument arg2 callEnv] ++ functionStack rest)
(hadminBody : AdminNoApp body) (hadminArg2 : AdminNoApp arg2)
(hscoped : ChannelConfig.WellScoped s)
(hrel : ChannelConfigRel D_0 j_0 realize s answer) :
PresentedChannelConfigCompleteness D_0 j_0 realize s answer := by
have hVal : ValueUnderFunctionArgumentFunctionSpine D_0 j_0 realize
  rest y (.lam z body) arg2 cloY callEnv := by
  intro s' arg answer' hc' hs' hscoped' hrel'
  exact
    value_under_function_argument_function_spine_presentedChannelConfigCompleteness
      D_0 j_0 realize rest hok hc' (by simp using hs')
      hadminBody hadminArg2 hscoped' hrel'
have hs' : s.stack =
  .function (.closure y (.lam z body) cloY) ::
    .argument arg2 callEnv :: functionStack rest := by
  simp using hs
exact admin_noapp_under_function_argument_function_spine_of_value
  D_0 j_0 realize rest hVal hadmin hc hs' hscoped hrel

/-- Inner `app (lam y (lam z body)) arg1` under one leftover argument
frame over a residual function-frame spine. -/
theorem app_lam_under_argument_function_spine_presentedChannelConfigCompleteness
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (rest : List (Name x Term (QubitPrimitive C) x RuntimeEnv C))
  (hok : FunctionSpineOk rest)
  {s : ChannelConfig C} {y z : Name}
  {body arg1 arg2 : Term (QubitPrimitive C)} {callEnv : RuntimeEnv C}
  {answer : HSemanticComp D_0 j_0}
  (hc : s.control = .term (.app (.lam y (.lam z body)) arg1))
  (hs : s.stack = .argument arg2 callEnv :: functionStack rest)
  (hadminBody : AdminNoApp body)
  (hadmin1 : AdminNoApp arg1) (hadmin2 : AdminNoApp arg2)
  (hscoped : ChannelConfig.WellScoped s)
  (hrel : ChannelConfigRel D_0 j_0 realize s answer) :
PresentedChannelConfigCompleteness D_0 j_0 realize s answer := by
have hsApp :
  {s with control := .term (.app (.lam y (.lam z body)) arg1)} =
  s :=
  ChannelConfig.ext hc.symm rfl rfl rfl
have hrelApp : ChannelConfigRel D_0 j_0 realize
  {s with control := .term (.app (.lam y (.lam z body)) arg1)}
  answer :=
  hsApp.symm |> hrel
have hrelLam :=
  channel_config_application D_0 j_0 (s := s)
  (fn := .lam y (.lam z body)) (arg := arg1) hrelApp
have hrelClo :=
  channel_config_lambda D_0 j_0
  (s := {s with stack := .argument arg1 s.env :: s.stack})
  hrelLam
have hrelArg :=
  channel_config_evaluateArgument D_0 j_0
  (s :=
    {s with
      control := .value (.closure y (.lam z body) s.env)
      stack := .argument arg1 s.env :: s.stack})
  (fn := .closure y (.lam z body) s.env) (arg := arg1)
  (callEnv := s.env) (rest := s.stack) hrelClo
let sArg : ChannelConfig C :=

```

```

{s with
  control := .term arg1
  stack := .function (.closure y (.lam z body) s.env) :: s.stack}
have hstepApp : ChannelInternalStep s
  {s with
    control := .term (.lam y (.lam z body))
    stack := .argument arg1 s.env :: s.stack} := by
have happ :
  ChannelInternalStep
  {s with control := .term (.app (.lam y (.lam z body)) arg1)}
  {s with
    control := .term (.lam y (.lam z body))
    stack := .argument arg1 s.env :: s.stack} :=
  ChannelInternalStep.application (s := s)
  (fn := .lam y (.lam z body)) (arg := arg1)
exact hsApp.symm |> happ
have hstepLam : ChannelInternalStep
  {s with
    control := .term (.lam y (.lam z body))
    stack := .argument arg1 s.env :: s.stack}
  {s with
    control := .value (.closure y (.lam z body) s.env)
    stack := .argument arg1 s.env :: s.stack} :=
  ChannelInternalStep.lambda
  (s := {s with stack := .argument arg1 s.env :: s.stack})
  (x := y) (body := .lam z body)
have hstepArg : ChannelInternalStep
  {s with
    control := .value (.closure y (.lam z body) s.env)
    stack := .argument arg1 s.env :: s.stack}
  sArg :=
  ChannelInternalStep.evaluateArgument
  (s :=
    {s with
      control := .value (.closure y (.lam z body) s.env)
      stack := .argument arg1 s.env :: s.stack})
  (fn := .closure y (.lam z body) s.env) (arg := arg1)
  (callEnv := s.env) (rest := s.stack)
have hscopedArg : ChannelConfig.WellScoped sArg :=
  ChannelInternalStep.preserve_wellScoped hstepArg
  (ChannelInternalStep.preserve_wellScoped hstepLam
    (ChannelInternalStep.preserve_wellScoped hstepApp hscoped))
have hsArg :
  sArg.stack =
  [.function (.closure y (.lam z body) s.env),
    .argument arg2 callEnv] ++ functionStack rest := by
simp [sArg, hs]
have harg :
  PresentedChannelConfigCompleteness D_0 j_0 realize sArg answer :=
  admin_noapp_under_function_argument_function_spine_presentedChannelConfigCompleteness
  D_0 j_0 realize rest hok (s := sArg) (code := arg1)
  (y := y) (z := z) (body := body) (arg2 := arg2)
  (cloY := s.env) (callEnv := callEnv) hadmin1 rfl hsArg
  hadminBody hadmin2 hscopedArg
  (by
    change ChannelConfigRel D_0 j_0 realize
    {s with
      control := .term arg1
      env := s.env
      stack :=
        .function (.closure y (.lam z body) s.env) ::
          s.stack}
    -

```

```

    exact hrelArg)
exact stacked_lam_app_presentedChannelConfigCompleteness D_0 j_0 realize
  (s := s) (x := y) (body := .lam z body) (arg := arg1) hc hrel harg

/-- Closed curry under an outer lambda:
`app (lam x bodyX) (app (app (lam y (lam z body)) arg1) arg2)`.-/
theorem closed_lam_app_app_lam_lam_admin_noapp_presented_channelTreeCompleteness
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (x y z : Name) (bodyX body arg1 arg2 : Term (QubitPrimitive C))
  (hclosed : Closed)
  (.app (.lam x bodyX)
    (.app (.app (.lam y (.lam z body)) arg1) arg2)))
  (hnoappX : NoApp bodyX)
  (hadminBody : AdminNoApp body)
  (hadmin1 : AdminNoApp arg1) (hadmin2 : AdminNoApp arg2)
  (quantum : NormalizedDensity 2)
  (semanticEnv : Env (HSemanticValue D_0 j_0)) :
  PresentedChannelTreeCompleteness D_0 j_0 realize
    (initialChannelConfig
      (.app (.lam x bodyX)
        (.app (.app (.lam y (.lam z body)) arg1) arg2))
        quantum)
    (interp (hardwarePrimitive D_0 j_0 realize)
      (.app (.lam x bodyX)
        (.app (.app (.lam y (.lam z body)) arg1) arg2))
        semanticEnv) := by
  let inner : Term (QubitPrimitive C) :=
    .app (.app (.lam y (.lam z body)) arg1) arg2
  let code : Term (QubitPrimitive C) := .app (.lam x bodyX) inner
  let s : ChannelConfig C := initialChannelConfig code quantum
  have hc : s.control = .term code := rfl
  have hrel :=
    initialChannelConfig_related D_0 j_0 realize code quantum semanticEnv
  have hscoped :=
    initialChannelConfig_wellScoped hclosed quantum
  have hsApp :
    {s with control := .term (.app (.lam x bodyX) inner)} = s :=
    ChannelConfig.ext hc.symm rfl rfl rfl
  have hrelApp : ChannelConfigRel D_0 j_0 realize
    {s with control := .term (.app (.lam x bodyX) inner)}
    (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv) :=
    hsApp.symm |> hrel
  have hrelLam :=
    channel_config_application D_0 j_0 (s := s)
    (fn := .lam x bodyX) (arg := inner) hrelApp
  have hrelClo :=
    channel_config_lambda D_0 j_0
    (s := {s with stack := .argument inner s.env :: s.stack})
    hrelLam
  have hrelInner :=
    channel_config_evaluateArgument D_0 j_0
    (s :=
      {s with
        control := .value (.closure x bodyX s.env)
        stack := .argument inner s.env :: s.stack})
    (fn := .closure x bodyX s.env) (arg := inner)
    (callEnv := s.env) (rest := s.stack) hrelClo
  let sInner : ChannelConfig C :=
    {s with

```

```

    control := .term inner
    stack := .function (.closure x bodyX s.env) :: s.stack}
have hstepApp : ChannelInternalStep s
  {s with
    control := .term (.lam x bodyX)
    stack := .argument inner s.env :: s.stack} := by
have happ :
  ChannelInternalStep
  {s with control := .term (.app (.lam x bodyX) inner)}
  {s with
    control := .term (.lam x bodyX)
    stack := .argument inner s.env :: s.stack} :=
  ChannelInternalStep.application (s := s)
  (fn := .lam x bodyX) (arg := inner)
exact hsApp.symm |> happ
have hstepLam : ChannelInternalStep
  {s with
    control := .term (.lam x bodyX)
    stack := .argument inner s.env :: s.stack}
  {s with
    control := .value (.closure x bodyX s.env)
    stack := .argument inner s.env :: s.stack} :=
  ChannelInternalStep.lambda
  (s := {s with stack := .argument inner s.env :: s.stack})
  (x := x) (body := bodyX)
have hstepInner : ChannelInternalStep
  {s with
    control := .value (.closure x bodyX s.env)
    stack := .argument inner s.env :: s.stack}
  sInner :=
  ChannelInternalStep.evaluateArgument
  (s :=
    {s with
      control := .value (.closure x bodyX s.env)
      stack := .argument inner s.env :: s.stack})
  (fn := .closure x bodyX s.env) (arg := inner)
  (callEnv := s.env) (rest := s.stack)
have hscopedInner : ChannelConfig.WellScoped sInner :=
  ChannelInternalStep.preserve_wellScoped hstepInner
  (ChannelInternalStep.preserve_wellScoped hstepLam
    (ChannelInternalStep.preserve_wellScoped hstepApp hscoped))
have hsInner :
  sInner.stack = functionStack [(x, bodyX, s.env)] := by
  simp [sInner, s, initialChannelConfig, ofConfig, initialConfig]
have hokX : FunctionSpineOk [(x, bodyX, s.env)] := hnoappX
let inner1 : Term (QubitPrimitive C) :=
  .app (.lam y (.lam z body)) arg1
have hsApp1 :
  {sInner with control := .term (.app inner1 arg2)} = sInner :=
  ChannelConfig.ext rfl rfl rfl rfl
have hrelApp1 : ChannelConfigRel D_0 j_0 realize
  {sInner with control := .term (.app inner1 arg2)}
  (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv) := by
  change ChannelConfigRel D_0 j_0 realize
  {s with
    control := .term inner
    env := s.env
    stack := .function (.closure x bodyX s.env) :: s.stack}
  -
  exact hrelInner
have hrelInner1 :=
  channel_config_application D_0 j_0 (s := sInner) (fn := inner1)
  (arg := arg2) hrelApp1

```

```

let sInner1 : ChannelConfig C :=
  {sInner with
    control := .term inner1
    stack := .argument arg2 sInner.env :: sInner.stack}
have hstepApp1 : ChannelInternalStep sInner sInner1 := by
  have happ :
    ChannelInternalStep
      {sInner with control := .term (.app inner1 arg2)}
      sInner1 :=
    ChannelInternalStep.application (s := sInner) (fn := inner1)
      (arg := arg2)
  exact hsApp1.symm |> happ
have hscopedInner1 : ChannelConfig.WellScoped sInner1 :=
  ChannelInternalStep.preserve_wellScoped hstepApp1 hscopedInner
have hsInner1 :
  sInner1.stack =
    .argument arg2 s.env :: functionStack [(x, bodyX, s.env)] := by
  simp [sInner1, sInner, s, initialChannelConfig, ofConfig,
    initialConfig]
have hinner1 :
  PresentedChannelConfigCompleteness D_0 j_0 realize sInner1
    (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv) :=
  app_lam_under_argument_function_spine_presentedChannelConfigCompleteness
    D_0 j_0 realize [(x, bodyX, s.env)] hokX (s := sInner1)
    (y := y) (z := z) (body := body) (arg1 := arg1) (arg2 := arg2)
    (callEnv := s.env) rfl hsInner1 hadminBody hadmin1 hadmin2
  hscopedInner1
  (by
    change ChannelConfigRel D_0 j_0 realize
      {sInner with
        control := .term inner1
        env := sInner.env
        stack := .argument arg2 sInner.env :: sInner.stack}
      -
      exact hrelInner1)
have hinner :
  PresentedChannelConfigCompleteness D_0 j_0 realize sInner
    (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv) :=
  application_presentedChannelConfigCompleteness D_0 j_0 realize
    (s := sInner) (fn := inner1) (arg := arg2) rfl
  (by
    change ChannelConfigRel D_0 j_0 realize
      {s with
        control := .term inner
        env := s.env
        stack := .function (.closure x bodyX s.env) :: s.stack}
      -
      exact hrelInner)
  hinner1
exact (stacked_lam_app_presentedChannelConfigCompleteness D_0 j_0 realize
  (s := s) (x := x) (body := bodyX) (arg := inner) hc hrel
  hinner).complete

/-- Token adequacy for closed curry under an outer lambda. -/
theorem closed_lam_app_app_lam_lam_admin_noapp_presented_token_adequacy
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (x y z : Name) (bodyX body arg1 arg2 : Term (QubitPrimitive C))
  (hclosed : Closed
    (.app (.lam x bodyX)

```

```

      (.app (.app (.lam y (.lam z body)) arg1) arg2)))
(hnoappX : NoApp bodyX)
(hadminBody : AdminNoApp body)
(hadmin1 : AdminNoApp arg1) (hadmin2 : AdminNoApp arg2)
(quantum : NormalizedDensity 2)
(semanticEnv : Env (HSemanticValue D_0 j_0))
(selectors : List Bool)
(? : HSemanticValue D_0 j_0 -> FiniteInstrumentComp 2 PUnit.{1})
(k : ScottMap (HSemanticValue D_0 j_0) (TResult 2))
(hk : forall d, k d = (? d).satisfiedTTTheory resultCode)
(i : Nat) (token : TTObservationToken 2) :
token in HardwareAdequacy.selectPath selectors
  (interp (hardwarePrimitive D_0 j_0 realize)
    (.app (.lam x bodyX)
      (.app (.app (.lam y (.lam z body)) arg1) arg2))
    semanticEnv) i k <->
exists fuel, exists (tree : ChannelTree C
  (initialChannelConfig
    (.app (.lam x bodyX)
      (.app (.app (.lam y (.lam z body)) arg1) arg2))
    quantum))
  (R : ChannelTreeRealization D_0 j_0 realize tree),
tree.depth <= fuel /\
ResultAvailable tree selectors i /\
TTObservationToken.Holds resultCode token
  ((restrictedInstrument D_0 j_0 realize tree R selectors i).bind
    ?) :=
presented_channel_tree_token_adequacy_iff D_0 j_0 realize
  (initialChannelConfig
    (.app (.lam x bodyX)
      (.app (.app (.lam y (.lam z body)) arg1) arg2))
    quantum)
  (interp (hardwarePrimitive D_0 j_0 realize)
    (.app (.lam x bodyX)
      (.app (.app (.lam y (.lam z body)) arg1) arg2))
    semanticEnv)
  (closed_lam_app_app_lam_lam_admin_noapp_presented_channelTreeCompleteness
    D_0 j_0 realize x y z bodyX body arg1 arg2 hclosed hnoappX
    hadminBody hadmin1 hadmin2 quantum semanticEnv)
  selectors ? k hk i token

/-- Value completeness under one function frame, leftover argument
frames, and a residual function-frame spine. -/
def ValueUnderFunctionArgumentThenFunctionSpine {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (args : List (Term (QubitPrimitive C) x RuntimeEnv C))
  (rest : List (Name x Term (QubitPrimitive C) x RuntimeEnv C)) :
Prop :=
forall {s : ChannelConfig C} {arg : RuntimeValue C} {x : Name}
  {body : Term (QubitPrimitive C)} {cloX : RuntimeEnv C}
  {answer : HSemanticComp D_0 j_0},
s.control = .value arg ->
s.stack =
  .function (.closure x body cloX) ::
    argumentThenFunctionStack args rest ->
BodyUnderArgsThenAdmin args.length body ->
ChannelConfig.WellScoped s ->
ChannelConfigRel D_0 j_0 realize s answer ->
PresentedChannelConfigCompleteness D_0 j_0 realize s answer

```



```

theorem pauliX_under_function_argument_then_function_spine_of_value
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (args : List (Term (QubitPrimitive C) x RuntimeEnv C))

```

Lean 4 source (lines 3201–3600)

```

  (rest : List (Name x Term (QubitPrimitive C) x RuntimeEnv C))
  (hVal : ValueUnderFunctionArgumentThenFunctionSpine D_0 j_0 realize
    args rest)
  {s : ChannelConfig C} {value : C} {x : Name}
  {body : Term (QubitPrimitive C)} {cloX : RuntimeEnv C}
  {answer : HSemanticComp D_0 j_0}
  (hc : s.control = .term (.prim (.pauliX value)))
  (hs : s.stack =
    .function (.closure x body cloX) ::
      argumentThenFunctionStack args rest)
  (hbody : BodyUnderArgsThenAdmin args.length body)
  (hscoped : ChannelConfig.WellScoped s)
  (hrel : ChannelConfigRel D_0 j_0 realize s answer) :
  PresentedChannelConfigCompleteness D_0 j_0 realize s answer := by
have hsPx :
  {s with control := .term (.prim (.pauliX value))} = s :=
  ChannelConfig.ext hc.symm rfl rfl rfl
obtain <semanticEnv, kStack, henv, hstack, rfl> :=
  channelConfigRel_term_inv D_0 j_0 hc hrel
let sVal : ChannelConfig C :=
  {s with
    control := .value (.payload value)
    quantum := applyOperation Qubit.pauliXOp s.quantum}
have hstep : ChannelInternalStep s sVal := by
  have happ :
    ChannelInternalStep
      {s with control := .term (.prim (.pauliX value))}
      sVal :=
    ChannelInternalStep.pauliXPrimitive (s := s) (value := value)
  exact hsPx.symm |> happ
have hscopedVal : ChannelConfig.WellScoped sVal :=
  ChannelInternalStep.preserve_wellScoped hstep hscoped
have hrelVal : ChannelConfigRel D_0 j_0 realize sVal
  (kStack
    (semanticUnit (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0) (realize value))) :=
  <semanticUnit (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0) (realize value),
    kStack,
    ControlRel.value _ _ s.env
    (payload_related D_0 j_0 realize value),
    hstack, rfl>
have hval :=
  hVal (s := sVal) (arg := .payload value) (x := x) (body := body)
  (cloX := cloX) rfl hs hbody hscopedVal hrelVal
refine
  { related := hrel
    complete := ?_ }
constructor
intro selectors i ? k? hk
have hchildEq :=
  hval.complete.selected_result_eq_channelTree_sup_presented
  selectors i ? k? hk
have hden :

```

```

    interp (hardwarePrimitive D_0 j_0 realize)
      (.prim (.pauliX value)) semanticEnv =
        taggedEmbed
          (FiniteInstrumentComp.ofOperation Qubit.pauliXOp
            (realize value)) := by
    simp [hardwarePrimitive_pauliX]
  have hne : s.stack != [] := by
    rw [hs]
    exact List.cons_ne_nil _ _
  let unitVal : HSemanticComp D_0 j_0 :=
    semanticUnit (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0) (realize value)
  let opVal : HSemanticComp D_0 j_0 :=
    taggedEmbed
      (FiniteInstrumentComp.ofOperation Qubit.pauliXOp
        (realize value))
  have hchildCoord :
    kStack unitVal (HardwareAdequacy.encodePath selectors i) k? =
      sSup (channelTreeResults D_0 j_0 realize sVal selectors i
        k?) := by
  have hsel :
    HardwareAdequacy.selectPath selectors (kStack unitVal) i k? =
      kStack unitVal (HardwareAdequacy.encodePath selectors i)
        k? :=
    congrArg (fun f => f k?)
      (HardwareAdequacy.selectPath_apply_encode selectors
        (kStack unitVal) i)
  exact hsel.symm.trans hchildEq
  have hselParent :
    HardwareAdequacy.selectPath selectors (kStack opVal) i k? =
      kStack opVal (HardwareAdequacy.encodePath selectors i) k? :=
    congrArg (fun f => f k?)
      (HardwareAdequacy.selectPath_apply_encode selectors
        (kStack opVal) i)
  have hop :
    kStack opVal (HardwareAdequacy.encodePath selectors i) k? =
      embed (FiniteInstrumentComp.ofOperation Qubit.pauliXOp
        (realize value))
        (ScottMap.const
          (kStack unitVal (HardwareAdequacy.encodePath selectors i)
            k?)) :=
    stackRel_ofOperation_eval D_0 j_0 hstack hne
    Qubit.pauliXOp (realize value)
    (HardwareAdequacy.encodePath selectors i) k?
  rw [hden, hselParent, hop, hchildCoord, embed_ofOperation_const_sSup]
  apply le_antisymm
  * apply sSup_le
    rintro T <r, <fuel, child, R, hdepth, rfl>, rfl>
    apply le_sSup
    refine <fuel + 1, ChannelTree.internal hstep child,
      wrapInternalRealization D_0 j_0 realize hstep child R, ?_, ?_>
    * change child.depth + 1 <= fuel + 1
    omega
  * exact
    (restrictedResult_internal_pauliX D_0 j_0 realize hstep hc
      child
      (wrapInternalRealization D_0 j_0 realize hstep child R)
      selectors i ? k? hk).symm
  * apply sSup_le
    rintro T <_, tree, R, _, rfl>
    cases tree with
    | terminal hterm =>
      cases hterm.control_eq.symm.trans hc

```

```

| @internal _ t' h next =>
  have ht : t' = sVal :=
    ChannelInternalStep.eq_config_of_pauliX h hc
  subst t'
  rw [restrictedResult_internal_pauliX D_0 j_0 realize h hc
    next R selectors i ? k? hk]
  apply le_sSup
  refine <restrictedResult D_0 j_0 realize next
    (internalChildRealization D_0 j_0 realize h next R)
    selectors i k?,
    <next.depth, next,
      internalChildRealization D_0 j_0 realize h next R,
      le_rfl, rfl>, rfl>
| external _ hex _ =>
  exact False.elim (ChannelExternalStep.not_prim hex hc)
| probability _ _ _ =>
  cases hc
| probabilityZero _ =>
  cases hc
| probabilityOne _ =>
  cases hc
| measurement _ _ =>
  cases hc

theorem admin_noapp_under_function_argument_then_function_spine_of_value
{C : Type}
(D_0 : QDomain.{0})
(j_0 : IsContinuousLatticeProjection D_0.carrier
  (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
(realize : C -> HSemanticValue D_0 j_0)
(args : List (Term (QubitPrimitive C) x RuntimeEnv C))
(rest : List (Name x Term (QubitPrimitive C) x RuntimeEnv C))
(hVal : ValueUnderFunctionArgumentThenFunctionSpine D_0 j_0 realize
  args rest)
{s : ChannelConfig C} {code : Term (QubitPrimitive C)}
{x : Name} {body : Term (QubitPrimitive C)} {cloX : RuntimeEnv C}
{answer : HSemanticComp D_0 j_0}
(hadmin : AdminNoApp code)
(hc : s.control = .term code)
(hs : s.stack =
  .function (.closure x body cloX) ::
    argumentThenFunctionStack args rest)
(hbody : BodyUnderArgsThenAdmin args.length body)
(hscoped : ChannelConfig.WellScoped s)
(hrel : ChannelConfigRel D_0 j_0 realize s answer) :
  PresentedChannelConfigCompleteness D_0 j_0 realize s answer := by
induction code generalizing s answer with
| var z =>
  have hctl := hscoped.left
  rw [hc] at hctl
  obtain <v, hlookup> := hctl.right z (by simp [free])
  have hsVar :
    {s with control := .term (.var z)} = s :=
    ChannelConfig.ext hc.symm rfl rfl rfl
  have hrelVar : ChannelConfigRel D_0 j_0 realize
    {s with control := .term (.var z)} answer :=
    hsVar.symm |> hrel
  have hrelVal :=
    channel_config_variable D_0 j_0 hlookup hrelVar
  have hscopedVal : ChannelConfig.WellScoped
    {s with control := .value v} :=
    <hctl.left, hctl.left z v hlookup>, hscoped.right>
  have hval :=

```

```

      hVal (s := {s with control := .value v}) (arg := v)
      (x := x) (body := body) (cloX := cloX)
      rfl hs hbody hscopedVal hrelVal
    exact variable_presentedChannelConfigCompleteness D_0 j_0 realize
      hc hlookup hrel hval
| app _ _ =>
  exact False.elim hadmin
| lam z M _ih =>
  have hsLam :
    {s with control := .term (.lam z M)} = s :=
    ChannelConfig.ext hc.symm rfl rfl rfl
  have hrelLam : ChannelConfigRel D_0 j_0 realize
    {s with control := .term (.lam z M)} answer :=
    hsLam.symm |> hrel
  have hrelVal :=
    channel_config_lambda D_0 j_0 (s := s) hrelLam
  have hstepLam : ChannelInternalStep s
    {s with control := .value (.closure z M s.env)} := by
  have happ :
    ChannelInternalStep
    {s with control := .term (.lam z M)}
    {s with control := .value (.closure z M s.env)} :=
    ChannelInternalStep.lambda (s := s) (x := z) (body := M)
  exact hsLam.symm |> happ
  have hscopedVal : ChannelConfig.WellScoped
    {s with control := .value (.closure z M s.env)} :=
    ChannelInternalStep.preserve_wellScoped hstepLam hscoped
  have hval :=
    hVal (s := {s with control := .value (.closure z M s.env)})
    (arg := .closure z M s.env) (x := x) (body := body)
    (cloX := cloX) rfl hs hbody hscopedVal hrelVal
  exact lambda_presentedChannelConfigCompleteness D_0 j_0 realize
    hc hrel hval
| recLam self z M _ih =>
  have hsRec :
    {s with control := .term (.recLam self z M)} = s :=
    ChannelConfig.ext hc.symm rfl rfl rfl
  have hrelRec : ChannelConfigRel D_0 j_0 realize
    {s with control := .term (.recLam self z M)} answer :=
    hsRec.symm |> hrel
  have hrelVal :=
    channel_config_recursive D_0 j_0 (s := s) hrelRec
  have hstepRec : ChannelInternalStep s
    {s with control := .value (.recClosure self z M s.env)} := by
  have happ :
    ChannelInternalStep
    {s with control := .term (.recLam self z M)}
    {s with
      control := .value (.recClosure self z M s.env)} :=
    ChannelInternalStep.recursive (s := s) (self := self)
    (arg := z) (body := M)
  exact hsRec.symm |> happ
  have hscopedVal : ChannelConfig.WellScoped
    {s with control := .value (.recClosure self z M s.env)} :=
    ChannelInternalStep.preserve_wellScoped hstepRec hscoped
  have hval :=
    hVal
    (s :=
      {s with control := .value (.recClosure self z M s.env)})
    (arg := .recClosure self z M s.env) (x := x) (body := body)
    (cloX := cloX) rfl hs hbody hscopedVal hrelVal
  exact recLam_presentedChannelConfigCompleteness D_0 j_0 realize
    hc hrel hval

```

```

| intern left right ihL ihR =>
  have <hnaL, hnaR> := hadmin
  have hscopedL :=
    wellScoped_term_child (child := left) hc hscoped
    (fun z hz => by simp [free, hz])
  have hscopedR :=
    wellScoped_term_child (child := right) hc hscoped
    (fun z hz => by simp [free, hz])
  refine intern_related_presentedChannelConfigCompleteness
    D_0 j_0 realize hc hrel ?_ ?_
  * intro semanticEnv k henv hstack
    exact ihL hnaL (s := {s with control := .term left}) rfl hs
      hscopedL
      <interp (hardwarePrimitive D_0 j_0 realize) left semanticEnv, k,
        ControlRel.term left s.env semanticEnv henv, hstack, rfl>
  * intro semanticEnv k henv hstack
    exact ihR hnaR (s := {s with control := .term right}) rfl hs
      hscopedR
      <interp (hardwarePrimitive D_0 j_0 realize) right semanticEnv, k,
        ControlRel.term right s.env semanticEnv henv, hstack, rfl>
| extern _ _ _ =>
  exact False.elim hadmin
| prob p left right ihL ihR =>
  have <hnaL, hnaR> := hadmin
  have hscopedL :=
    wellScoped_term_child (child := left) hc hscoped
    (fun z hz => by simp [free, hz])
  have hscopedR :=
    wellScoped_term_child (child := right) hc hscoped
    (fun z hz => by simp [free, hz])
  refine prob_related_presentedChannelConfigCompleteness
    D_0 j_0 realize hc hrel ?_ ?_
  * intro semanticEnv k quantum henv hstack
    exact ihL hnaL
      (s := {s with control := .term left, quantum := quantum})
      rfl hs <hscopedL.left, hscopedL.right>
      <interp (hardwarePrimitive D_0 j_0 realize) left semanticEnv, k,
        ControlRel.term left s.env semanticEnv henv, hstack, rfl>
  * intro semanticEnv k quantum henv hstack
    exact ihR hnaR
      (s := {s with control := .term right, quantum := quantum})
      rfl hs <hscopedR.left, hscopedR.right>
      <interp (hardwarePrimitive D_0 j_0 realize) right semanticEnv, k,
        ControlRel.term right s.env semanticEnv henv, hstack, rfl>
| prim prim =>
  cases prim with
| ret value =>
  have hsRet :
    {s with control := .term (.prim (.ret value))} = s :=
    ChannelConfig.ext hc.symm rfl rfl rfl
  have hrelRet : ChannelConfigRel D_0 j_0 realize
    {s with control := .term (.prim (.ret value))} answer :=
    hsRet.symm |> hrel
  have hrelVal :=
    channel_config_return D_0 j_0 hrelRet
  have hstepRet : ChannelInternalStep s
    {s with control := .value (.payload value)} := by
  have happ :
    ChannelInternalStep
      {s with control := .term (.prim (.ret value))}
      {s with control := .value (.payload value)} :=
    ChannelInternalStep.returnPrimitive (s := s)
    (value := value)

```

```

    exact hsRet.symm |> happ
  have hscopedVal : ChannelConfig.WellScoped
    {s with control := .value (.payload value)} :=
    ChannelInternalStep.preserve_wellScoped hstepRet hscoped
  have hval :=
    hVal (s := {s with control := .value (.payload value)})
      (arg := .payload value) (x := x) (body := body)
      (cloX := cloX) rfl hs hbody hscopedVal hrelVal
  exact return_presentedChannelConfigCompleteness D_0 j_0 realize
    hc hrel hval
| pauliX value =>
  exact
    pauliX_under_function_argument_then_function_spine_of_value
      D_0 j_0 realize args rest hVal hc hs hbody hscoped hrel
| measureZ _ _ =>
  exact False.elim hadmin

/-- Leftover argument frames over a residual function-frame spine. -/
theorem argument_then_function_spine_presented
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (args : List (Term (QubitPrimitive C) x RuntimeEnv C))
  (rest : List (Name x Term (QubitPrimitive C) x RuntimeEnv C))
  (hargs : ArgumentFramesOk args) (hok : FunctionSpineOk rest) :
  (forall {s : ChannelConfig C} {x : Name}
    {body : Term (QubitPrimitive C)} {answer : HSemanticComp D_0 j_0},
    s.control = .term (.lam x body) ->
    s.stack = argumentThenFunctionStack args rest ->
    LamAbsorbsThenAdmin args.length body ->
    ChannelConfig.WellScoped s ->
    ChannelConfigRel D_0 j_0 realize s answer ->
    PresentedChannelConfigCompleteness D_0 j_0 realize s answer)
  /\
  ValueUnderFunctionArgumentThenFunctionSpine D_0 j_0 realize args rest
  /\
  (forall {s : ChannelConfig C} {code : Term (QubitPrimitive C)}
    {x : Name} {body : Term (QubitPrimitive C)}
    {cloX : RuntimeEnv C} {answer : HSemanticComp D_0 j_0},
    AdminNoApp code ->
    s.control = .term code ->
    s.stack =
      .function (.closure x body cloX) ::
        argumentThenFunctionStack args rest ->
        BodyUnderArgsThenAdmin args.length body ->
        ChannelConfig.WellScoped s ->
        ChannelConfigRel D_0 j_0 realize s answer ->
        PresentedChannelConfigCompleteness D_0 j_0 realize s answer) := by
  induction args with
| nil =>
  refine <?hlam, ?hval, ?hadmin>
  * intro s x body answer hc hs _habs hscoped hrel
    have hslam :
      {s with control := .term (.lam x body)} = s :=
      ChannelConfig.ext hc.symm rfl rfl rfl
    have hrelLam : ChannelConfigRel D_0 j_0 realize
      {s with control := .term (.lam x body)} answer :=
      hslam.symm |> hrel
    have hrelVal :=
      channel_config_lambda D_0 j_0 (s := s) hrelLam
    have hstepLam : ChannelInternalStep s

```

```

    {s with control := .value (.closure x body s.env)} := by
have happ :
  ChannelInternalStep
    {s with control := .term (.lam x body)}
    {s with control := .value (.closure x body s.env)} :=
  ChannelInternalStep.lambda (s := s) (x := x) (body := body)
exact hsLam.symm |> happ
have hscopedVal : ChannelConfig.WellScoped
  {s with control := .value (.closure x body s.env)} :=
  ChannelInternalStep.preserve_wellScoped hstepLam hscoped
have hs' : ({s with
  control := .value (.closure x body s.env)}).stack =
  functionStack rest := by
  simp [argumentThenFunctionStack] using hs
have hval :=
  value_under_function_spine_presentedChannelConfigCompleteness
  D_0 j_0 realize rest hok
  (s := {s with control := .value (.closure x body s.env)})
  rfl hs' hscopedVal hrelVal
exact lambda_presentedChannelConfigCompleteness D_0 j_0 realize
  hc hrel hval
* intro s arg x body cloX answer hc hs hbody hscoped hrel
have hs' : s.stack =
  functionStack ((x, body, cloX) :: rest) := by
  simp [argumentThenFunctionStack, functionStack] using hs
have hokFull : FunctionSpineOk ((x, body, cloX) :: rest) :=
  FunctionSpineOk.cons hok.ne_nil hbody hok
exact
  value_under_function_spine_presentedChannelConfigCompleteness
  D_0 j_0 realize ((x, body, cloX) :: rest) hokFull hc hs'
  hscoped hrel

```

Lean 4 source (lines 3601–4000)

```

* intro s code x body cloX answer hadmin hc hs hbody hscoped
  hrel
have hs' : s.stack =
  functionStack ((x, body, cloX) :: rest) := by
  simp [argumentThenFunctionStack, functionStack] using hs
have hokFull : FunctionSpineOk ((x, body, cloX) :: rest) :=
  FunctionSpineOk.cons hok.ne_nil hbody hok
exact
  admin_noapp_under_function_spine_presentedChannelConfigCompleteness
  D_0 j_0 realize ((x, body, cloX) :: rest) hokFull hadmin hc
  hs' hscoped hrel
| cons p restArgs ih =>
  rcases p with <arg, callEnv>
  have hadminArg : AdminNoApp arg :=
    hargs (arg, callEnv) (by simp)
  have hargsRest : ArgumentFramesOk restArgs :=
    fun q hq => hargs q (by simp [hq])
  obtain <ihLam, ihVal, ihAdmin> := ih hargsRest
  have hlam :
    forall {s : ChannelConfig C} {x : Name}
      {body : Term (QubitPrimitive C)}
      {answer : HSemanticComp D_0 j_0},
    s.control = .term (.lam x body) ->
    s.stack =
      argumentThenFunctionStack ((arg, callEnv) :: restArgs)
      rest ->
  LamAbsorbsThenAdmin
    ((arg, callEnv) :: restArgs).length body ->
  ChannelConfig.WellScoped s ->
  ChannelConfigRel D_0 j_0 realize s answer ->

```

```

PresentedChannelConfigCompleteness D_0 j_0 realize s
  answer := by
intro s x body answer hc hs habs hscoped hrel
have hslam :
  {s with control := .term (.lam x body)} = s :=
  ChannelConfig.ext hc.symm rfl rfl rfl
have hrelLam : ChannelConfigRel D_0 j_0 realize
  {s with control := .term (.lam x body)} answer :=
  hslam.symm |> hrel
have hrelClo :=
  channel_config_lambda D_0 j_0 (s := s) hrelLam
have hsrcClo :
  {s with control := .value (.closure x body s.env)} =
  {s with
    control := .value (.closure x body s.env)
    stack :=
      .argument arg callEnv ::
        argumentThenFunctionStack restArgs rest} :=
  ChannelConfig.ext rfl rfl hs rfl
have hrelFn :=
  channel_config_evaluateArgument D_0 j_0
  (s := {s with control := .value (.closure x body s.env)})
  (fn := .closure x body s.env) (arg := arg)
  (callEnv := callEnv)
  (rest := argumentThenFunctionStack restArgs rest)
  (hsrcClo |> hrelClo)
have hstepLam : ChannelInternalStep s
  {s with control := .value (.closure x body s.env)} := by
have happ :
  ChannelInternalStep
  {s with control := .term (.lam x body)}
  {s with control := .value (.closure x body s.env)} :=
  ChannelInternalStep.lambda (s := s) (x := x) (body := body)
  exact hslam.symm |> happ
have hstepArg : ChannelInternalStep
  {s with control := .value (.closure x body s.env)}
  {s with
    control := .term arg
    env := callEnv
    stack :=
      .function (.closure x body s.env) ::
        argumentThenFunctionStack restArgs rest} := by
have happ :
  ChannelInternalStep
  {s with
    control := .value (.closure x body s.env)
    stack :=
      .argument arg callEnv ::
        argumentThenFunctionStack restArgs rest}
  {s with
    control := .term arg
    env := callEnv
    stack :=
      .function (.closure x body s.env) ::
        argumentThenFunctionStack restArgs rest} :=
  ChannelInternalStep.evaluateArgument
  (s := {s with control := .value (.closure x body s.env)})
  (fn := .closure x body s.env) (arg := arg)
  (callEnv := callEnv)
  (rest := argumentThenFunctionStack restArgs rest)
  exact hsrcClo.symm |> happ
have hscopedFn : ChannelConfig.WellScoped
  {s with

```



```

    control := .term arg
    env := callEnv
    stack :=
      .function (.closure x body s.env) ::
        argumentThenFunctionStack restArgs rest} :=
  ChannelInternalStep.preserve_wellScoped hstepArg
  (ChannelInternalStep.preserve_wellScoped hstepLam hscoped)
  have hbodyRest : BodyUnderArgsThenAdmin restArgs.length body :=
    by simp [LamAbsorbsThenAdmin] using habs
  have harg :
    PresentedChannelConfigCompleteness D_0 j_0 realize
    {s with
      control := .term arg
      env := callEnv
      stack :=
        .function (.closure x body s.env) ::
          argumentThenFunctionStack restArgs rest}
    answer :=
  ihAdmin hadminArg rfl rfl hbodyRest hscopedFn hrelFn
  have hClo :=
    evaluateArgument_presentedChannelConfigCompleteness
      D_0 j_0 realize
      (s := {s with control := .value (.closure x body s.env)})
      (fn := .closure x body s.env) (arg := arg)
      (callEnv := callEnv)
      (rest := argumentThenFunctionStack restArgs rest)
      rfl hs hrelClo harg
  exact lambda_presentedChannelConfigCompleteness D_0 j_0 realize
    hc hrel hClo
  have hval : ValueUnderFunctionArgumentThenFunctionSpine
    D_0 j_0 realize ((arg, callEnv) :: restArgs) rest := by
  intro s v x body cloX answer hc hs hbody hscoped hrel
  obtain <y, body', rfl, hbody'> :=
    BodyUnderArgsThenAdmin_succ_inv (n := restArgs.length) hbody
  have hEq :
    {s with
      control := .value v
      stack :=
        .function (.closure x (.lam y body') cloX) ::
          argumentThenFunctionStack
            ((arg, callEnv) :: restArgs) rest} = s :=
    ChannelConfig.ext hc.symm rfl hs.symm rfl
  have hrel' : ChannelConfigRel D_0 j_0 realize
    {s with
      control := .value v
      stack :=
        .function (.closure x (.lam y body') cloX) ::
          argumentThenFunctionStack
            ((arg, callEnv) :: restArgs) rest}
    answer :=
    hEq.symm |> hrel
  have hrelBody :=
    channel_config_beta D_0 j_0 (s := s) (x := x)
    (body := .lam y body') (closureEnv := cloX) (arg := v)
    (rest :=
      argumentThenFunctionStack
        ((arg, callEnv) :: restArgs) rest)
    hrel'
  let sBody : ChannelConfig C :=
    {s with
      control := .term (.lam y body')
      env := RuntimeEnv.bind x v cloX
      stack :=

```

```

    argumentThenFunctionStack
      ((arg, callEnv) :: restArgs) rest}
have hstepBeta : ChannelInternalStep s sBody := by
  have happ :
    ChannelInternalStep
      {s with
        control := .value v
        stack :=
          .function (.closure x (.lam y body') cloX) ::
            argumentThenFunctionStack
              ((arg, callEnv) :: restArgs) rest}
        sBody :=
          ChannelInternalStep.beta (s := s) (x := x)
            (body := .lam y body') (closureEnv := cloX) (arg := v)
        (rest :=
          argumentThenFunctionStack
            ((arg, callEnv) :: restArgs) rest)}
  exact hEq.symm |> happ
have hscopedBody : ChannelConfig.WellScoped sBody :=
  ChannelInternalStep.preserve_wellScoped hstepBeta hscoped
have habs : LamAbsorbsThenAdmin
  ((arg, callEnv) :: restArgs).length body' :=
  hbody'
have hchild :=
  hlam (s := sBody) (x := y) (body := body') rfl rfl habs
  hscopedBody hrelBody
exact beta_presentedChannelConfigCompleteness D_0 j_0 realize
  (s := s) (x := x) (body := .lam y body')
  (closureEnv := cloX) (arg := v)
  (rest :=
    argumentThenFunctionStack
      ((arg, callEnv) :: restArgs) rest)
  hc hs hrel hchild
exact <hlam, hval,
  fun {s} {code} {x} {body} {cloX} {answer} =>
    admin_noapp_under_function_argument_then_function_spine_of_value
      D_0 j_0 realize ((arg, callEnv) :: restArgs) rest hval>

theorem lam_under_argument_then_function_spine_presentedChannelConfigCompleteness
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (args : List (Term (QubitPrimitive C) x RuntimeEnv C))
  (rest : List (Name x Term (QubitPrimitive C) x RuntimeEnv C))
  (hargs : ArgumentFramesOk args) (hok : FunctionSpineOk rest)
  {s : ChannelConfig C} {x : Name}
  {body : Term (QubitPrimitive C)} {answer : HSemanticComp D_0 j_0}
  (hc : s.control = .term (.lam x body))
  (hs : s.stack = argumentThenFunctionStack args rest)
  (habs : LamAbsorbsThenAdmin args.length body)
  (hscoped : ChannelConfig.WellScoped s)
  (hrel : ChannelConfigRel D_0 j_0 realize s answer) :
  PresentedChannelConfigCompleteness D_0 j_0 realize s answer :=
  (argument_then_function_spine_presented D_0 j_0 realize args rest
    hargs hok).1 hc hs habs hscoped hrel

theorem value_under_function_argument_then_function_spine_presentedChannelConfigCompleteness
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))

```

```

(realize : C -> HSemanticValue D_0 j_0)
(args : List (Term (QubitPrimitive C) x RuntimeEnv C))
(rest : List (Name x Term (QubitPrimitive C) x RuntimeEnv C))
(hargs : ArgumentFramesOk args) (hok : FunctionSpineOk rest)
{s : ChannelConfig C} {arg : RuntimeValue C} {x : Name}
{body : Term (QubitPrimitive C)} {cloX : RuntimeEnv C}
{answer : HSemanticComp D_0 j_0}
(hc : s.control = .value arg)
(hs : s.stack =
  .function (.closure x body cloX) ::
    argumentThenFunctionStack args rest)
(hbody : BodyUnderArgsThenAdmin args.length body)
(hscoped : ChannelConfig.WellScoped s)
(hrel : ChannelConfigRel D_0 j_0 realize s answer) :
PresentedChannelConfigCompleteness D_0 j_0 realize s answer :=
(argument_then_function_spine_presented D_0 j_0 realize args rest
hargs hok).2.1 hc hs hbody hscoped hrel

```

theorem

```

admin_noapp_under_function_argument_then_function_spine_presentedChannelConfigCompleteness
{C : Type}
(D_0 : QDomain.{0})
(j_0 : IsContinuousLatticeProjection D_0.carrier
  (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
(realize : C -> HSemanticValue D_0 j_0)
(args : List (Term (QubitPrimitive C) x RuntimeEnv C))
(rest : List (Name x Term (QubitPrimitive C) x RuntimeEnv C))
(hargs : ArgumentFramesOk args) (hok : FunctionSpineOk rest)
{s : ChannelConfig C} {code : Term (QubitPrimitive C)}
{x : Name} {body : Term (QubitPrimitive C)} {cloX : RuntimeEnv C}
{answer : HSemanticComp D_0 j_0}
(hadmin : AdminNoApp code)
(hc : s.control = .term code)
(hs : s.stack =
  .function (.closure x body cloX) ::
    argumentThenFunctionStack args rest)
(hbody : BodyUnderArgsThenAdmin args.length body)
(hscoped : ChannelConfig.WellScoped s)
(hrel : ChannelConfigRel D_0 j_0 realize s answer) :
PresentedChannelConfigCompleteness D_0 j_0 realize s answer :=
(argument_then_function_spine_presented D_0 j_0 realize args rest
hargs hok).2.2 hadmin hc hs hbody hscoped hrel

```

/-- Inner `app (lam x body) arg` under leftover argument frames over a residual function-frame spine. -/

theorem app_lam_under_argument_then_function_spine_presentedChannelConfigCompleteness

```

{C : Type}
(D_0 : QDomain.{0})
(j_0 : IsContinuousLatticeProjection D_0.carrier
  (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
(realize : C -> HSemanticValue D_0 j_0)
(args : List (Term (QubitPrimitive C) x RuntimeEnv C))
(rest : List (Name x Term (QubitPrimitive C) x RuntimeEnv C))
(hargs : ArgumentFramesOk args) (hok : FunctionSpineOk rest)
{s : ChannelConfig C} {x : Name}
{body arg : Term (QubitPrimitive C)} {answer : HSemanticComp D_0 j_0}
(hc : s.control = .term (.app (.lam x body) arg))
(hs : s.stack = argumentThenFunctionStack args rest)
(hadminArg : AdminNoApp arg)
(hbody : BodyUnderArgsThenAdmin args.length body)
(hscoped : ChannelConfig.WellScoped s)
(hrel : ChannelConfigRel D_0 j_0 realize s answer) :
PresentedChannelConfigCompleteness D_0 j_0 realize s answer := by

```

```

have hsApp :
  {s with control := .term (.app (.lam x body) arg)} = s :=
  ChannelConfig.ext hc.symm rfl rfl rfl
have hrelApp : ChannelConfigRel D_0 j_0 realize
  {s with control := .term (.app (.lam x body) arg)} answer :=
  hsApp.symm |> hrel
have hrelLam :=
  channel_config_application D_0 j_0 (s := s) (fn := .lam x body)
  (arg := arg) hrelApp
have hrelClo :=
  channel_config_lambda D_0 j_0
  (s := {s with stack := .argument arg s.env :: s.stack})
  hrelLam
have hrelArg :=
  channel_config_evaluateArgument D_0 j_0
  (s :=
    {s with
      control := .value (.closure x body s.env)
      stack := .argument arg s.env :: s.stack})
  (fn := .closure x body s.env) (arg := arg)
  (callEnv := s.env) (rest := s.stack) hrelClo
let sArg : ChannelConfig C :=
  {s with
    control := .term arg
    stack := .function (.closure x body s.env) :: s.stack}
have hstepApp : ChannelInternalStep s
  {s with
    control := .term (.lam x body)
    stack := .argument arg s.env :: s.stack} := by
  have happ :
    ChannelInternalStep
    {s with control := .term (.app (.lam x body) arg)}
    {s with
      control := .term (.lam x body)
      stack := .argument arg s.env :: s.stack} :=
    ChannelInternalStep.application (s := s)
    (fn := .lam x body) (arg := arg)
  exact hsApp.symm |> happ
have hstepLam : ChannelInternalStep
  {s with
    control := .term (.lam x body)
    stack := .argument arg s.env :: s.stack}
  {s with
    control := .value (.closure x body s.env)
    stack := .argument arg s.env :: s.stack} :=
  ChannelInternalStep.lambda
  (s := {s with stack := .argument arg s.env :: s.stack})
  (x := x) (body := body)
have hstepArg : ChannelInternalStep
  {s with
    control := .value (.closure x body s.env)
    stack := .argument arg s.env :: s.stack}
  sArg :=
  ChannelInternalStep.evaluateArgument
  (s :=
    {s with
      control := .value (.closure x body s.env)
      stack := .argument arg s.env :: s.stack})
  (fn := .closure x body s.env) (arg := arg)
  (callEnv := s.env) (rest := s.stack)
have hscopedArg : ChannelConfig.WellScoped sArg :=
  ChannelInternalStep.preserve_wellScoped hstepArg
  (ChannelInternalStep.preserve_wellScoped hstepLam

```

```

      (ChannelInternalStep.preserve_wellScoped hstepApp hscoped))
have hsArg :
  sArg.stack =
    .function (.closure x body s.env) ::
      argumentThenFunctionStack args rest := by
    simp [sArg, hs]
have harg :
  PresentedChannelConfigCompleteness D_0 j_0 realize sArg answer :=
  admin_noapp_under_function_argument_then_function_spine_presentedChannelConfigCompleteness
  D_0 j_0 realize args rest hargs hok (s := sArg) (code := arg)
  (x := x) (body := body) (cloX := s.env) hadminArg rfl hsArg
  hbody hscopedArg
  (by
    change ChannelConfigRel D_0 j_0 realize
      {s with
        control := .term arg
        env := s.env
        stack :=
          .function (.closure x body s.env) :: s.stack}
      -
      exact hrelArg)
exact stacked_lam_app_presentedChannelConfigCompleteness D_0 j_0 realize
  (s := s) (x := x) (body := body) (arg := arg) hc hrel harg

/-- Closed triple curry under an outer lambda:
`app (lam x bodyX) (app (app (app (lam y (lam z (lam w body)))) arg1) arg2) arg3)` -/
theorem closed_lam_app_app_app_lam_lam_lam_admin_noapp_presented_channelTreeCompleteness
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (x y z w : Name) (bodyX body arg1 arg2 arg3 : Term (QubitPrimitive C))
  (hclosed : Closed
    (.app (.lam x bodyX)
      (.app (.app (.app (.lam y (.lam z (.lam w body)))) arg1) arg2)
      arg3)))
  (hnoappX : NoApp bodyX)
  (hadminBody : AdminNoApp body)
  (hadmin1 : AdminNoApp arg1) (hadmin2 : AdminNoApp arg2)
  (hadmin3 : AdminNoApp arg3)
  (quantum : NormalizedDensity 2)
  (semanticEnv : Env (HSemanticValue D_0 j_0)) :
  PresentedChannelTreeCompleteness D_0 j_0 realize
    (initialChannelConfig
      (.app (.lam x bodyX)
        (.app (.app (.app (.lam y (.lam z (.lam w body)))) arg1) arg2)
        arg3))
      quantum)
    (interp (hardwarePrimitive D_0 j_0 realize)
      (.app (.lam x bodyX)
        (.app (.app (.app (.lam y (.lam z (.lam w body)))) arg1) arg2)
        arg3))
      semanticEnv) := by
let inner : Term (QubitPrimitive C) :=
  .app (.app (.app (.lam y (.lam z (.lam w body)))) arg1) arg2) arg3

```

Lean 4 source (lines 4001–4400)

```

let code : Term (QubitPrimitive C) := .app (.lam x bodyX) inner
let s : ChannelConfig C := initialChannelConfig code quantum
have hc : s.control = .term code := rfl
have hrel :=
  initialChannelConfig_related D_0 j_0 realize code quantum semanticEnv

```

```

have hscoped :=
  initialChannelConfig_wellScoped hclosed quantum
have hsApp :
  {s with control := .term (.app (.lam x bodyX) inner)} = s :=
  ChannelConfig.ext hc.symm rfl rfl rfl
have hrelApp : ChannelConfigRel D_0 j_0 realize
  {s with control := .term (.app (.lam x bodyX) inner)}
  (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv) :=
  hsApp.symm |> hrel
have hrellam :=
  channel_config_application D_0 j_0 (s := s)
  (fn := .lam x bodyX) (arg := inner) hrelApp
have hrelClo :=
  channel_config_lambda D_0 j_0
  (s := {s with stack := .argument inner s.env :: s.stack})
  hrellam
have hrelInner :=
  channel_config_evaluateArgument D_0 j_0
  (s :=
    {s with
      control := .value (.closure x bodyX s.env)
      stack := .argument inner s.env :: s.stack})
  (fn := .closure x bodyX s.env) (arg := inner)
  (callEnv := s.env) (rest := s.stack) hrelClo
let sInner : ChannelConfig C :=
  {s with
    control := .term inner
    stack := .function (.closure x bodyX s.env) :: s.stack}
have hstepApp : ChannelInternalStep s
  {s with
    control := .term (.lam x bodyX)
    stack := .argument inner s.env :: s.stack} := by
  have happ :
    ChannelInternalStep
    {s with control := .term (.app (.lam x bodyX) inner)}
    {s with
      control := .term (.lam x bodyX)
      stack := .argument inner s.env :: s.stack} :=
    ChannelInternalStep.application (s := s)
    (fn := .lam x bodyX) (arg := inner)
  exact hsApp.symm |> happ
have hstepLam : ChannelInternalStep
  {s with
    control := .term (.lam x bodyX)
    stack := .argument inner s.env :: s.stack}
  {s with
    control := .value (.closure x bodyX s.env)
    stack := .argument inner s.env :: s.stack} :=
  ChannelInternalStep.lambda
  (s := {s with stack := .argument inner s.env :: s.stack})
  (x := x) (body := bodyX)
have hstepInner : ChannelInternalStep
  {s with
    control := .value (.closure x bodyX s.env)
    stack := .argument inner s.env :: s.stack}
  sInner :=
  ChannelInternalStep.evaluateArgument
  (s :=
    {s with
      control := .value (.closure x bodyX s.env)
      stack := .argument inner s.env :: s.stack})
  (fn := .closure x bodyX s.env) (arg := inner)
  (callEnv := s.env) (rest := s.stack)

```

```

have hscopedInner : ChannelConfig.WellScoped sInner :=
  ChannelInternalStep.preserve_wellScoped hstepInner
    (ChannelInternalStep.preserve_wellScoped hstepLam
      (ChannelInternalStep.preserve_wellScoped hstepApp hscoped))
have hokX : FunctionSpineOk [(x, bodyX, s.env)] := hnoappX
let inner2 : Term (QubitPrimitive C) :=
  .app (.app (.lam y (.lam z (.lam w body)))) arg1 arg2
have hsApp2 :
  {sInner with control := .term (.app inner2 arg3)} = sInner :=
  ChannelConfig.ext rfl rfl rfl rfl
have hrelApp2 : ChannelConfigRel D_0 j_0 realize
  {sInner with control := .term (.app inner2 arg3)}
  (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv) := by
  change ChannelConfigRel D_0 j_0 realize
  {s with
    control := .term inner
    env := s.env
    stack := .function (.closure x bodyX s.env) :: s.stack}
-
exact hrelInner
have hrelInner2 :=
  channel_config_application D_0 j_0 (s := sInner) (fn := inner2)
  (arg := arg3) hrelApp2
let sInner2 : ChannelConfig C :=
  {sInner with
    control := .term inner2
    stack := .argument arg3 sInner.env :: sInner.stack}
have hstepApp2 : ChannelInternalStep sInner sInner2 := by
  have happ :
    ChannelInternalStep
      {sInner with control := .term (.app inner2 arg3)}
      sInner2 :=
    ChannelInternalStep.application (s := sInner) (fn := inner2)
    (arg := arg3)
  exact hsApp2.symm |> happ
have hscopedInner2 : ChannelConfig.WellScoped sInner2 :=
  ChannelInternalStep.preserve_wellScoped hstepApp2 hscopedInner
let inner1 : Term (QubitPrimitive C) :=
  .app (.lam y (.lam z (.lam w body)))) arg1
have hsApp1 :
  {sInner2 with control := .term (.app inner1 arg2)} = sInner2 :=
  ChannelConfig.ext rfl rfl rfl rfl
have hrelApp1 : ChannelConfigRel D_0 j_0 realize
  {sInner2 with control := .term (.app inner1 arg2)}
  (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv) := by
  change ChannelConfigRel D_0 j_0 realize
  {sInner with
    control := .term inner2
    env := sInner.env
    stack := .argument arg3 sInner.env :: sInner.stack}
-
exact hrelInner2
have hrelInner1 :=
  channel_config_application D_0 j_0 (s := sInner2) (fn := inner1)
  (arg := arg2) hrelApp1
let sInner1 : ChannelConfig C :=
  {sInner2 with
    control := .term inner1
    stack := .argument arg2 sInner2.env :: sInner2.stack}
have hstepApp1 : ChannelInternalStep sInner2 sInner1 := by
  have happ :
    ChannelInternalStep
      {sInner2 with control := .term (.app inner1 arg2)}

```

```

      sInner1 :=
        ChannelInternalStep.application (s := sInner2) (fn := inner1)
        (arg := arg2)
    exact hsApp1.symm |> happ
have hscopedInner1 : ChannelConfig.WellScoped sInner1 :=
  ChannelInternalStep.preserve_wellScoped hstepApp1 hscopedInner2
have hsInner1 :
  sInner1.stack =
    argumentThenFunctionStack
      [(arg2, s.env), (arg3, s.env)] [(x, bodyX, s.env)] := by
    simp [sInner1, sInner2, sInner, s, argumentThenFunctionStack,
      initialChannelConfig, ofConfig, initialConfig]
have hargs23 : ArgumentFramesOk [(arg2, s.env), (arg3, s.env)] := by
  intro p hp
  simp at hp
  rcases hp with h | h <;> cases h <;> assumption
have hbodyYZ : BodyUnderArgsThenAdmin 2 (.lam z (.lam w body)) :=
  hadminBody
have hinner1 :
  PresentedChannelConfigCompleteness D_0 j_0 realize sInner1
  (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv) :=
  app_lam_under_argument_then_function_spine_presentedChannelConfigCompleteness
  D_0 j_0 realize [(arg2, s.env), (arg3, s.env)]
  [(x, bodyX, s.env)] hargs23 hokX (s := sInner1)
  (x := y) (body := .lam z (.lam w body)) (arg := arg1)
  rfl hsInner1 hadmin1 hbodyYZ hscopedInner1
  (by
    change ChannelConfigRel D_0 j_0 realize
    {sInner2 with
      control := .term inner1
      env := sInner2.env
      stack := .argument arg2 sInner2.env :: sInner2.stack}
    -
    exact hrelInner1)
have hinner2 :
  PresentedChannelConfigCompleteness D_0 j_0 realize sInner2
  (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv) :=
  application_presentedChannelConfigCompleteness D_0 j_0 realize
  (s := sInner2) (fn := inner1) (arg := arg2) rfl
  (by
    change ChannelConfigRel D_0 j_0 realize
    {sInner with
      control := .term inner2
      env := sInner.env
      stack := .argument arg3 sInner.env :: sInner.stack}
    -
    exact hrelInner2)
  hinner1
have hinner :
  PresentedChannelConfigCompleteness D_0 j_0 realize sInner
  (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv) :=
  application_presentedChannelConfigCompleteness D_0 j_0 realize
  (s := sInner) (fn := inner2) (arg := arg3) rfl
  (by
    change ChannelConfigRel D_0 j_0 realize
    {s with
      control := .term inner
      env := s.env
      stack := .function (.closure x bodyX s.env) :: s.stack}
    -
    exact hrelInner)
  hinner2
exact (stacked_lam_app_presentedChannelConfigCompleteness D_0 j_0 realize

```



```

(s := s) (x := x) (body := bodyX) (arg := inner) hc hrel
hinner).complete

/-- Token adequacy for closed triple curry under an outer lambda. -/
theorem closed_lam_app_app_app_lam_lam_lam_admin_noapp_presented_token_adequacy
{C : Type}
(D_0 : QDomain.{0})
(j_0 : IsContinuousLatticeProjection D_0.carrier
  (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
(realize : C -> HSemanticValue D_0 j_0)
(x y z w : Name) (bodyX body arg1 arg2 arg3 : Term (QubitPrimitive C))
(hclosed : Closed
  (.app (.lam x bodyX)
    (.app (.app (.app (.lam y (.lam z (.lam w body)))) arg1) arg2)
    arg3)))
(hnoappX : NoApp bodyX)
(hadminBody : AdminNoApp body)
(hadmin1 : AdminNoApp arg1) (hadmin2 : AdminNoApp arg2)
(hadmin3 : AdminNoApp arg3)
(quantum : NormalizedDensity 2)
(semanticEnv : Env (HSemanticValue D_0 j_0))
(selectors : List Bool)
(? : HSemanticValue D_0 j_0 -> FiniteInstrumentComp 2 PUnit.{1})
(k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2))
(hk : forall d, k d = (? d).satisfiedTTTheory resultCode)
(i : Nat) (token : TTObservationToken 2) :
token in HardwareAdequacy.selectPath selectors
  (interp (hardwarePrimitive D_0 j_0 realize)
    (.app (.lam x bodyX)
      (.app (.app (.app (.lam y (.lam z (.lam w body)))) arg1)
        arg2)
      arg3))
    semanticEnv) i k <->
exists fuel, exists (tree : ChannelTree C
  (initialChannelConfig
    (.app (.lam x bodyX)
      (.app (.app (.app (.lam y (.lam z (.lam w body)))) arg1)
        arg2)
      arg3))
    quantum))
(R : ChannelTreeRealization D_0 j_0 realize tree),
tree.depth <= fuel /\
ResultAvailable tree selectors i /\
TTObservationToken.Holds resultCode token
  ((restrictedInstrument D_0 j_0 realize tree R selectors i).bind
    ?) :=
presented_channel_tree_token_adequacy_iff D_0 j_0 realize
  (initialChannelConfig
    (.app (.lam x bodyX)
      (.app (.app (.app (.lam y (.lam z (.lam w body)))) arg1) arg2)
      arg3))
    quantum)
(interp (hardwarePrimitive D_0 j_0 realize)
  (.app (.lam x bodyX)
    (.app (.app (.app (.lam y (.lam z (.lam w body)))) arg1) arg2)
    arg3))
  semanticEnv)
(closed_lam_app_app_app_lam_lam_lam_admin_noapp_presented_channelTreeCompleteness
  D_0 j_0 realize x y z w bodyX body arg1 arg2 arg3 hclosed hnoappX
  hadminBody hadmin1 hadmin2 hadmin3 quantum semanticEnv)
selectors ? k hk i token

/-- Value completeness under a mixed function/argument spine over a

```

```

residual function-frame spine. -/
def ValueUnderMixedThenFn {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (fns : List (Name x Term (QubitPrimitive C) x RuntimeEnv C))
  (args : List (Term (QubitPrimitive C) x RuntimeEnv C))
  (rest : List (Name x Term (QubitPrimitive C) x RuntimeEnv C)) :
  Prop :=
forall {s : ChannelConfig C} {arg : RuntimeValue C}
  {answer : HSemanticComp D_0 j_0},
  s.control = .value arg ->
  s.stack = mixedThenFunctionStack fns args rest ->
  MixedThenFnOk fns args rest ->
  ArgumentFramesOk args ->
  ChannelConfig.WellScoped s ->
  ChannelConfigRel D_0 j_0 realize s answer ->
  PresentedChannelConfigCompleteness D_0 j_0 realize s answer

theorem pauliX_under_mixed_then_fn_of_value
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (fns : List (Name x Term (QubitPrimitive C) x RuntimeEnv C))
  (args : List (Term (QubitPrimitive C) x RuntimeEnv C))
  (rest : List (Name x Term (QubitPrimitive C) x RuntimeEnv C))
  (hVal : ValueUnderMixedThenFn D_0 j_0 realize fns args rest)
  {s : ChannelConfig C} {value : C} {answer : HSemanticComp D_0 j_0}
  (hc : s.control = .term (.prim (.pauliX value)))
  (hs : s.stack = mixedThenFunctionStack fns args rest)
  (hok : MixedThenFnOk fns args rest) (hargs : ArgumentFramesOk args)
  (hscoped : ChannelConfig.WellScoped s)
  (hrel : ChannelConfigRel D_0 j_0 realize s answer) :
  PresentedChannelConfigCompleteness D_0 j_0 realize s answer := by
have hsPx :
  {s with control := .term (.prim (.pauliX value))} = s :=
  ChannelConfig.ext hc.symm rfl rfl rfl
obtain <semanticEnv, kStack, henv, hstack, rfl> :=
  channelConfigRel_term_inv D_0 j_0 hc hrel
let sVal : ChannelConfig C :=
  {s with
    control := .value (.payload value)
    quantum := applyOperation Qubit.pauliXOp s.quantum}
have hstep : ChannelInternalStep s sVal := by
  have happ :
    ChannelInternalStep
      {s with control := .term (.prim (.pauliX value))}
      sVal :=
    ChannelInternalStep.pauliXPrimitive (s := s) (value := value)
  exact hsPx.symm |> happ
have hscopedVal : ChannelConfig.WellScoped sVal :=
  ChannelInternalStep.preserve_wellScoped hstep hscoped
have hrelVal : ChannelConfigRel D_0 j_0 realize sVal
  (kStack
    (semanticUnit (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0) (realize value))) :=
  <semanticUnit (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0) (realize value),
    kStack,
    ControlRel.value _ _ s.env

```

```

      (payload_related D_0 j_0 realize value),
      hstack, rfl>
have hval :=
  hVal (s := sVal) (arg := .payload value) rfl hs hok hargs
  hscopedVal hrelVal
refine
  { related := hrel
    complete := ?_ }
constructor
intro selectors i ? k? hk
have hchildEq :=
  hval.complete.selected_result_eq_channelTree_sup_presented
  selectors i ? k? hk
have hden :
  interp (hardwarePrimitive D_0 j_0 realize)
    (.prim (.pauliX value)) semanticEnv =
    taggedEmbed
      (FiniteInstrumentComp.ofOperation Qubit.pauliXOp
        (realize value)) := by
    simp [hardwarePrimitive_pauliX]
have hne : s.stack != [] := by
  rw [hs]
  exact hok.stack_ne_nil
let unitVal : HSemanticComp D_0 j_0 :=
  semanticUnit (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0) (realize value)
let opVal : HSemanticComp D_0 j_0 :=
  taggedEmbed
    (FiniteInstrumentComp.ofOperation Qubit.pauliXOp
      (realize value))
have hchildCoord :
  kStack unitVal (HardwareAdequacy.encodePath selectors i) k? =
  sSup (channelTreeResults D_0 j_0 realize sVal selectors i
    k?) := by
  have hsel :
    HardwareAdequacy.selectPath selectors (kStack unitVal) i k? =
    kStack unitVal (HardwareAdequacy.encodePath selectors i)
    k? :=
    congrArg (fun f => f k?)
    (HardwareAdequacy.selectPath_apply_encode selectors
      (kStack unitVal) i)
  exact hsel.symm.trans hchildEq
have hselParent :
  HardwareAdequacy.selectPath selectors (kStack opVal) i k? =
  kStack opVal (HardwareAdequacy.encodePath selectors i) k? :=
  congrArg (fun f => f k?)
  (HardwareAdequacy.selectPath_apply_encode selectors
    (kStack opVal) i)
have hop :
  kStack opVal (HardwareAdequacy.encodePath selectors i) k? =
  embed (FiniteInstrumentComp.ofOperation Qubit.pauliXOp
    (realize value))
    (ScottMap.const
      (kStack unitVal (HardwareAdequacy.encodePath selectors i)
        k?)) :=
  stackRel_ofOperation_eval D_0 j_0 hstack hne
  Qubit.pauliXOp (realize value)
  (HardwareAdequacy.encodePath selectors i) k?
rw [hden, hselParent, hop, hchildCoord, embed_ofOperation_const_sSup]
apply le_antisymm
* apply sSup_le
  rintro T <r, <fuel, child, R, hdepth, rfl>, rfl>
  apply le_sSup

```

```

refine <fuel + 1, ChannelTree.internal hstep child,
  wrapInternalRealization D_0 j_0 realize hstep child R, ?_, ?_>
* change child.depth + 1 <= fuel + 1
  omega
* exact
  (restrictedResult_internal_pauliX D_0 j_0 realize hstep hc
    child
    (wrapInternalRealization D_0 j_0 realize hstep child R)
    selectors i ? k? hk).symm
* apply sSup_le
  rintro T <_, tree, R, _, rfl>
  cases tree with
  | terminal hterm =>
    cases hterm.control_eq.symm.trans hc
  | @internal _ t' h next =>
    have ht : t' = sVal :=
      ChannelInternalStep.eq_config_of_pauliX h hc

```

Lean 4 source (lines 4401–4800)

```

  subst t'
  rw [restrictedResult_internal_pauliX D_0 j_0 realize h hc
    next R selectors i ? k? hk]
  apply le_sSup
  refine <restrictedResult D_0 j_0 realize next
    (internalChildRealization D_0 j_0 realize h next R)
    selectors i k?,
    <next.depth, next,
    internalChildRealization D_0 j_0 realize h next R,
    le_rfl, rfl>, rfl>
  | external _ hex _ =>
    exact False.elim (ChannelExternalStep.not_prim hex hc)
  | probability _ _ _ =>
    cases hc
  | probabilityZero _ =>
    cases hc
  | probabilityOne _ =>
    cases hc
  | measurement _ _ =>
    cases hc

theorem admin_noapp_under_mixed_then_fn_of_value
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (fns : List (Name x Term (QubitPrimitive C) x RuntimeEnv C))
  (args : List (Term (QubitPrimitive C) x RuntimeEnv C))
  (rest : List (Name x Term (QubitPrimitive C) x RuntimeEnv C))
  (hVal : ValueUnderMixedThenFn D_0 j_0 realize fns args rest)
  {s : ChannelConfig C} {code : Term (QubitPrimitive C)}
  {answer : HSemanticComp D_0 j_0}
  (hadmin : AdminNoApp code)
  (hc : s.control = .term code)
  (hs : s.stack = mixedThenFunctionStack fns args rest)
  (hok : MixedThenFnOk fns args rest) (hargs : ArgumentFramesOk args)
  (hscoped : ChannelConfig.WellScoped s)
  (hrel : ChannelConfigRel D_0 j_0 realize s answer) :
  PresentedChannelConfigCompleteness D_0 j_0 realize s answer := by
  induction code generalizing s answer with
  | var z =>
    have hctl := hscoped.left
    rw [hc] at hctl

```

```

obtain <v, hlookup> := hctl.right z (by simp [free])
have hsVar :
  {s with control := .term (.var z)} = s :=
  ChannelConfig.ext hc.symm rfl rfl rfl
have hrelVar : ChannelConfigRel D_0 j_0 realize
  {s with control := .term (.var z)} answer :=
  hsVar.symm |> hrel
have hrelVal :=
  channel_config_variable D_0 j_0 hlookup hrelVar
have hscopedVal : ChannelConfig.WellScoped
  {s with control := .value v} :=
  <(hctl.left, hctl.left z v hlookup), hscoped.right>
have hval :=
  hVal (s := {s with control := .value v}) (arg := v)
  rfl hs hok hargs hscopedVal hrelVal
exact variable_presentedChannelConfigCompleteness D_0 j_0 realize
  hc hlookup hrel hval
| app _ _ =>
  exact False.elim hadmin
| lam z M _ih =>
  have hsLam :
    {s with control := .term (.lam z M)} = s :=
    ChannelConfig.ext hc.symm rfl rfl rfl
  have hrelLam : ChannelConfigRel D_0 j_0 realize
    {s with control := .term (.lam z M)} answer :=
    hsLam.symm |> hrel
  have hrelVal :=
    channel_config_lambda D_0 j_0 (s := s) hrelLam
  have hstepLam : ChannelInternalStep s
    {s with control := .value (.closure z M s.env)} := by
  have happ :
    ChannelInternalStep
      {s with control := .term (.lam z M)}
      {s with control := .value (.closure z M s.env)} :=
    ChannelInternalStep.lambda (s := s) (x := z) (body := M)
  exact hsLam.symm |> happ
  have hscopedVal : ChannelConfig.WellScoped
    {s with control := .value (.closure z M s.env)} :=
    ChannelInternalStep.preserve_wellScoped hstepLam hscoped
  have hval :=
    hVal (s := {s with control := .value (.closure z M s.env)})
      (arg := .closure z M s.env) rfl hs hok hargs hscopedVal
      hrelVal
  exact lambda_presentedChannelConfigCompleteness D_0 j_0 realize
    hc hrel hval
| recLam self z M _ih =>
  have hsRec :
    {s with control := .term (.recLam self z M)} = s :=
    ChannelConfig.ext hc.symm rfl rfl rfl
  have hrelRec : ChannelConfigRel D_0 j_0 realize
    {s with control := .term (.recLam self z M)} answer :=
    hsRec.symm |> hrel
  have hrelVal :=
    channel_config_recursive D_0 j_0 (s := s) hrelRec
  have hstepRec : ChannelInternalStep s
    {s with control := .value (.recClosure self z M s.env)} := by
  have happ :
    ChannelInternalStep
      {s with control := .term (.recLam self z M)}
      {s with
        control := .value (.recClosure self z M s.env)} :=
    ChannelInternalStep.recursive (s := s) (self := self)
      (arg := z) (body := M)

```

```

    exact hsRec.symm |> happ
  have hscopedVal : ChannelConfig.WellScoped
    {s with control := .value (.recClosure self z M s.env)} :=
    ChannelInternalStep.preserve_wellScoped hstepRec hscoped
  have hval :=
    hVal
    (s :=
      {s with control := .value (.recClosure self z M s.env)})
    (arg := .recClosure self z M s.env) rfl hs hok hargs
    hscopedVal hrelVal
  exact recLam_presentedChannelConfigCompleteness D_0 j_0 realize
    hc hrel hval
| intern left right ihL ihR =>
  have <hnaL, hnaR> := hadmin
  have hscopedL :=
    wellScoped_term_child (child := left) hc hscoped
    (fun z hz => by simp [free, hz])
  have hscopedR :=
    wellScoped_term_child (child := right) hc hscoped
    (fun z hz => by simp [free, hz])
  refine intern_related_presentedChannelConfigCompleteness
    D_0 j_0 realize hc hrel ?_ ?_
  * intro semanticEnv k henv hstack
    exact ihL hnaL (s := {s with control := .term left}) rfl hs
      hscopedL
    <interp (hardwarePrimitive D_0 j_0 realize) left semanticEnv, k,
      ControlRel.term left s.env semanticEnv henv, hstack, rfl>
  * intro semanticEnv k henv hstack
    exact ihR hnaR (s := {s with control := .term right}) rfl hs
      hscopedR
    <interp (hardwarePrimitive D_0 j_0 realize) right semanticEnv, k,
      ControlRel.term right s.env semanticEnv henv, hstack, rfl>
| extern _ _ _ =>
  exact False.elim hadmin
| prob p left right ihL ihR =>
  have <hnaL, hnaR> := hadmin
  have hscopedL :=
    wellScoped_term_child (child := left) hc hscoped
    (fun z hz => by simp [free, hz])
  have hscopedR :=
    wellScoped_term_child (child := right) hc hscoped
    (fun z hz => by simp [free, hz])
  refine prob_related_presentedChannelConfigCompleteness
    D_0 j_0 realize hc hrel ?_ ?_
  * intro semanticEnv k quantum henv hstack
    exact ihL hnaL
    (s := {s with control := .term left, quantum := quantum})
    rfl hs <hscopedL.left, hscopedL.right>
    <interp (hardwarePrimitive D_0 j_0 realize) left semanticEnv, k,
      ControlRel.term left s.env semanticEnv henv, hstack, rfl>
  * intro semanticEnv k quantum henv hstack
    exact ihR hnaR
    (s := {s with control := .term right, quantum := quantum})
    rfl hs <hscopedR.left, hscopedR.right>
    <interp (hardwarePrimitive D_0 j_0 realize) right semanticEnv, k,
      ControlRel.term right s.env semanticEnv henv, hstack, rfl>
| prim prim =>
  cases prim with
| ret value =>
  have hsRet :
    {s with control := .term (.prim (.ret value))} = s :=
    ChannelConfig.ext hc.symm rfl rfl rfl
  have hrelRet : ChannelConfigRel D_0 j_0 realize

```

```

      {s with control := .term (.prim (.ret value))} answer :=
    hsRet.symm |> hrel
  have hrelVal :=
    channel_config_return D_0 j_0 hrelRet
  have hstepRet : ChannelInternalStep s
    {s with control := .value (.payload value)} := by
    have happ :
      ChannelInternalStep
        {s with control := .term (.prim (.ret value))}
        {s with control := .value (.payload value)} :=
      ChannelInternalStep.returnPrimitive (s := s)
      (value := value)
    exact hsRet.symm |> happ
  have hscopedVal : ChannelConfig.WellScoped
    {s with control := .value (.payload value)} :=
    ChannelInternalStep.preserve_wellScoped hstepRet hscoped
  have hval :=
    hVal (s := {s with control := .value (.payload value)})
    (arg := .payload value) rfl hs hok hargs hscopedVal
    hrelVal
  exact return_presentedChannelConfigCompleteness D_0 j_0 realize
    hc hrel hval
| pauliX value =>
  exact
    pauliX_under_mixed_then_fn_of_value
      D_0 j_0 realize fns args rest hVal hc hs hok hargs
      hscoped hrel
| measureZ _ _ =>
  exact False.elim hadmin

theorem mixed_then_fn_spine_presented
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (fns : List (Name x Term (QubitPrimitive C) x RuntimeEnv C))
  (args : List (Term (QubitPrimitive C) x RuntimeEnv C))
  (rest : List (Name x Term (QubitPrimitive C) x RuntimeEnv C))
  (hok : MixedThenFnOk fns args rest)
  (_hargs : ArgumentFramesOk args) :
  ValueUnderMixedThenFn D_0 j_0 realize fns args rest /\
  (forall {s : ChannelConfig C} {code : Term (QubitPrimitive C)}
    {answer : HSemanticComp D_0 j_0},
    AdminNoApp code ->
    s.control = .term code ->
    s.stack = mixedThenFunctionStack fns args rest ->
    MixedThenFnOk fns args rest ->
    ArgumentFramesOk args ->
    ChannelConfig.WellScoped s ->
    ChannelConfigRel D_0 j_0 realize s answer ->
    PresentedChannelConfigCompleteness D_0 j_0 realize s answer) := by
induction fns with
| nil => exact False.elim hok
| cons p restFns ih =>
  rcases p with <x, body, clo>
  cases restFns with
| nil =>
  have <hbody, hokRest> := MixedThenFnOk_singleton.mp hok
  have hval : ValueUnderMixedThenFn D_0 j_0 realize
    [(x, body, clo)] args rest := by
    intro s arg answer hc hs _hok hargs' hscoped hrel
    have hs' : s.stack =

```

```

        .function (.closure x body clo) ::
            argumentThenFunctionStack args rest := by
            simp [mixedThenFunctionStack] using hs
        exact

value_under_function_argument_then_function_spine_presentedChannelConfigCompleteness
    D_0 j_0 realize args rest hargs' hokRest hc hs' hbody
    hscoped hrel
    exact <hval,
        fun {s} {code} {answer} =>
            admin_noapp_under_mixed_then_fn_of_value
                D_0 j_0 realize [(x, body, clo)] args rest hval>
| cons q rest' =>
    have <hadminY, hokRest> :=
        (MixedThenFnOk_cons_cons
            (x := x) (body := body) (clo := clo) (y := q)
            (restFns := rest') (args := args) (rest := rest')).mp hok
    obtain <ihVal, ihAdmin> := ih hokRest
    have hval : ValueUnderMixedThenFn D_0 j_0 realize
        ((x, body, clo) :: q :: rest') args rest := by
        intro s arg answer hc hs _hok' hargs' hscoped hrel
        have hsEq :
            {s with
                control := .value arg
                stack :=
                    .function (.closure x body clo) ::
                        mixedThenFunctionStack (q :: rest') args
                        rest} = s :=
            ChannelConfig.ext hc.symm rfl hs.symm rfl
        have hrel' : ChannelConfigRel D_0 j_0 realize
            {s with
                control := .value arg
                stack :=
                    .function (.closure x body clo) ::
                        mixedThenFunctionStack (q :: rest') args
                        rest}
            answer :=
            hsEq.symm |> hrel
        have hrelBody :=
            channel_config_beta D_0 j_0 (s := s) (x := x)
            (body := body) (closureEnv := clo) (arg := arg)
            (rest :=
                mixedThenFunctionStack (q :: rest') args rest)
            hrel'
    let sBody : ChannelConfig C :=
        {s with
            control := .term body
            env := RuntimeEnv.bind x arg clo
            stack :=
                mixedThenFunctionStack (q :: rest') args rest}
    have hstepBeta : ChannelInternalStep s sBody := by
        have happ :
            ChannelInternalStep
            {s with
                control := .value arg
                stack :=
                    .function (.closure x body clo) ::
                        mixedThenFunctionStack (q :: rest') args
                        rest}
            sBody :=
            ChannelInternalStep.beta (s := s) (x := x)
            (body := body) (closureEnv := clo) (arg := arg)
            (rest :=

```



```

        mixedThenFunctionStack (q :: rest') args rest)
    exact hsEq.symm |> happ
    have hscopedBody : ChannelConfig.WellScoped sBody :=
      ChannelInternalStep.preserve_wellScoped hstepBeta hscoped
    have hchild :=
      ihAdmin (s := sBody) (code := body) hadminY rfl rfl
      hokRest hargs' hscopedBody hrelBody
    exact beta_presentedChannelConfigCompleteness D_0 j_0 realize
      (s := s) (x := x) (body := body) (closureEnv := clo)
      (arg := arg)
      (rest :=
        mixedThenFunctionStack (q :: rest') args rest)
    hc hs hrel hchild
  exact <hval,
    fun {s} {code} {answer} =>
      admin_noapp_under_mixed_then_fn_of_value
        D_0 j_0 realize ((x, body, clo) :: q :: rest') args
        rest hval>

theorem admin_noapp_under_mixed_then_fn_presentedChannelConfigCompleteness
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (fns : List (Name x Term (QubitPrimitive C) x RuntimeEnv C))
  (args : List (Term (QubitPrimitive C) x RuntimeEnv C))
  (rest : List (Name x Term (QubitPrimitive C) x RuntimeEnv C))
  (hok : MixedThenFnOk fns args rest)
  (hargs : ArgumentFramesOk args)
  {s : ChannelConfig C} {code : Term (QubitPrimitive C)}
  {answer : HSemanticComp D_0 j_0}
  (hadmin : AdminNoApp code)
  (hc : s.control = .term code)
  (hs : s.stack = mixedThenFunctionStack fns args rest)
  (hscoped : ChannelConfig.WellScoped s)
  (hrel : ChannelConfigRel D_0 j_0 realize s answer) :
  PresentedChannelConfigCompleteness D_0 j_0 realize s answer :=
  (mixed_then_fn_spine_presented D_0 j_0 realize fns args rest hok
    hargs).2 hadmin hc hs hok hargs hscoped hrel

theorem app_lam_under_mixed_then_fn_presentedChannelConfigCompleteness
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (fns : List (Name x Term (QubitPrimitive C) x RuntimeEnv C))
  (args : List (Term (QubitPrimitive C) x RuntimeEnv C))
  (rest : List (Name x Term (QubitPrimitive C) x RuntimeEnv C))
  (hok : MixedThenFnOk fns args rest)
  (hargs : ArgumentFramesOk args)
  {s : ChannelConfig C} {y : Name}
  {bodyY arg : Term (QubitPrimitive C)} {answer : HSemanticComp D_0 j_0}
  (hc : s.control = .term (.app (.lam y bodyY) arg))
  (hs : s.stack = mixedThenFunctionStack fns args rest)
  (hadminY : AdminNoApp bodyY) (hadminArg : AdminNoApp arg)
  (hscoped : ChannelConfig.WellScoped s)
  (hrel : ChannelConfigRel D_0 j_0 realize s answer) :
  PresentedChannelConfigCompleteness D_0 j_0 realize s answer := by
  have hsApp :
    {s with control := .term (.app (.lam y bodyY) arg)} = s :=
    ChannelConfig.ext hc.symm rfl rfl rfl

```

```

have hrelApp : ChannelConfigRel D_0 j_0 realize
  {s with control := .term (.app (.lam y bodyY) arg)} answer :=
  hsApp.symm |> hrel
have hrelLam :=
  channel_config_application D_0 j_0 (s := s)
  (fn := .lam y bodyY) (arg := arg) hrelApp
have hrelClo :=
  channel_config_lambda D_0 j_0
  (s := {s with stack := .argument arg s.env :: s.stack})
  hrelLam
have hrelArg :=
  channel_config_evaluateArgument D_0 j_0
  (s :=
    {s with
      control := .value (.closure y bodyY s.env)
      stack := .argument arg s.env :: s.stack})
  (fn := .closure y bodyY s.env) (arg := arg)
  (callEnv := s.env) (rest := s.stack) hrelClo
let sArg : ChannelConfig C :=
  {s with
    control := .term arg
    stack := .function (.closure y bodyY s.env) :: s.stack}
have hstepApp : ChannelInternalStep s
  {s with
    control := .term (.lam y bodyY)
    stack := .argument arg s.env :: s.stack} := by
have happ :
  ChannelInternalStep
  {s with control := .term (.app (.lam y bodyY) arg)}
  {s with
    control := .term (.lam y bodyY)
    stack := .argument arg s.env :: s.stack} :=
  ChannelInternalStep.application (s := s)
  (fn := .lam y bodyY) (arg := arg)
exact hsApp.symm |> happ
have hstepLam : ChannelInternalStep
  {s with
    control := .term (.lam y bodyY)
    stack := .argument arg s.env :: s.stack}
  {s with
    control := .value (.closure y bodyY s.env)
    stack := .argument arg s.env :: s.stack} :=

```

Lean 4 source (lines 4801–5200)

```

ChannelInternalStep.lambda
  (s := {s with stack := .argument arg s.env :: s.stack})
  (x := y) (body := bodyY)
have hstepArg : ChannelInternalStep
  {s with
    control := .value (.closure y bodyY s.env)
    stack := .argument arg s.env :: s.stack}
  sArg :=
  ChannelInternalStep.evaluateArgument
  (s :=
    {s with
      control := .value (.closure y bodyY s.env)
      stack := .argument arg s.env :: s.stack})
  (fn := .closure y bodyY s.env) (arg := arg)
  (callEnv := s.env) (rest := s.stack)
have hscopedArg : ChannelConfig.WellScoped sArg :=
  ChannelInternalStep.preserve_wellScoped hstepArg
  (ChannelInternalStep.preserve_wellScoped hstepLam
    (ChannelInternalStep.preserve_wellScoped hstepApp hscoped))

```

```

have hsArg :
  sArg.stack =
    mixedThenFunctionStack ((y, bodyY, s.env) :: fns) args
    rest := by
      simp [sArg, hs, mixedThenFunctionStack]
have hokFull : MixedThenFnOk ((y, bodyY, s.env) :: fns) args rest :=
  MixedThenFnOk.cons hok.ne_nil hadminY hok
have harg :
  PresentedChannelConfigCompleteness D_0 j_0 realize sArg answer :=
  admin_noapp_under_mixed_then_fn_presentedChannelConfigCompleteness
  D_0 j_0 realize ((y, bodyY, s.env) :: fns) args rest hokFull
  hargs (s := sArg) (code := arg) hadminArg rfl hsArg hscopedArg
  (by
    change ChannelConfigRel D_0 j_0 realize
    {s with
      control := .term arg
      env := s.env
      stack :=
        .function (.closure y bodyY s.env) :: s.stack}
    -
    exact hrelArg)
exact stacked_lam_app_presentedChannelConfigCompleteness D_0 j_0 realize
  (s := s) (x := y) (body := bodyY) (arg := arg) hc hrel harg

/-- Closed mixed left-and-right nest under an outer lambda. -/
theorem closed_lam_mixed_lam_app_lam_admin_noapp_presented_channelTreeCompleteness
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (a x y z : Name)
  (bodyA body bodyZ arg arg2 : Term (QubitPrimitive C))
  (hclosed : Closed
    (.app (.lam a bodyA)
      (.app (.app (.lam x (.lam y body)) (.app (.lam z bodyZ) arg))
        arg2)))
  (hnoappA : NoApp bodyA)
  (hadminBody : AdminNoApp body)
  (hadminZ : AdminNoApp bodyZ)
  (hadminArg : AdminNoApp arg) (hadmin2 : AdminNoApp arg2)
  (quantum : NormalizedDensity 2)
  (semanticEnv : Env (HSemanticValue D_0 j_0)) :
  PresentedChannelTreeCompleteness D_0 j_0 realize
    (initialChannelConfig
      (.app (.lam a bodyA)
        (.app (.app (.lam x (.lam y body)) (.app (.lam z bodyZ) arg))
          arg2))
      quantum)
    (interp (hardwarePrimitive D_0 j_0 realize)
      (.app (.lam a bodyA)
        (.app (.app (.lam x (.lam y body)) (.app (.lam z bodyZ) arg))
          arg2))
      semanticEnv) := by
  let innerApp : Term (QubitPrimitive C) := .app (.lam z bodyZ) arg
  let inner : Term (QubitPrimitive C) :=
    .app (.lam x (.lam y body)) innerApp
  let mixed : Term (QubitPrimitive C) := .app inner arg2
  let code : Term (QubitPrimitive C) := .app (.lam a bodyA) mixed
  let s : ChannelConfig C := initialChannelConfig code quantum
  have hc : s.control = .term code := rfl
  have hrel :=
    initialChannelConfig_related D_0 j_0 realize code quantum semanticEnv

```

```

have hscoped :=
  initialChannelConfig_wellScoped hclosed quantum
have hsApp :
  {s with control := .term (.app (.lam a bodyA) mixed)} = s :=
  ChannelConfig.ext hc.symm rfl rfl rfl
have hrelApp : ChannelConfigRel D_0 j_0 realize
  {s with control := .term (.app (.lam a bodyA) mixed)}
  (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv) :=
  hsApp.symm |> hrel
have hrellamA :=
  channel_config_application D_0 j_0 (s := s)
  (fn := .lam a bodyA) (arg := mixed) hrelApp
have hrelCloA :=
  channel_config_lambda D_0 j_0
  (s := {s with stack := .argument mixed s.env :: s.stack})
  hrellamA
have hrelMixed :=
  channel_config_evaluateArgument D_0 j_0
  (s :=
    {s with
      control := .value (.closure a bodyA s.env)
      stack := .argument mixed s.env :: s.stack})
  (fn := .closure a bodyA s.env) (arg := mixed)
  (callEnv := s.env) (rest := s.stack) hrelCloA
let sMixed : ChannelConfig C :=
  {s with
    control := .term mixed
    stack := .function (.closure a bodyA s.env) :: s.stack}
have hstepApp : ChannelInternalStep s
  {s with
    control := .term (.lam a bodyA)
    stack := .argument mixed s.env :: s.stack} := by
  have happ :
    ChannelInternalStep
    {s with control := .term (.app (.lam a bodyA) mixed)}
    {s with
      control := .term (.lam a bodyA)
      stack := .argument mixed s.env :: s.stack} :=
    ChannelInternalStep.application (s := s)
    (fn := .lam a bodyA) (arg := mixed)
  exact hsApp.symm |> happ
have hstepLamA : ChannelInternalStep
  {s with
    control := .term (.lam a bodyA)
    stack := .argument mixed s.env :: s.stack}
  {s with
    control := .value (.closure a bodyA s.env)
    stack := .argument mixed s.env :: s.stack} :=
  ChannelInternalStep.lambda
  (s := {s with stack := .argument mixed s.env :: s.stack})
  (x := a) (body := bodyA)
have hstepMixed : ChannelInternalStep
  {s with
    control := .value (.closure a bodyA s.env)
    stack := .argument mixed s.env :: s.stack}
  sMixed :=
  ChannelInternalStep.evaluateArgument
  (s :=
    {s with
      control := .value (.closure a bodyA s.env)
      stack := .argument mixed s.env :: s.stack})
  (fn := .closure a bodyA s.env) (arg := mixed)
  (callEnv := s.env) (rest := s.stack)

```

```

have hscopedMixed : ChannelConfig.WellScoped sMixed :=
  ChannelInternalStep.preserve_wellScoped hstepMixed
    (ChannelInternalStep.preserve_wellScoped hstepLamA
      (ChannelInternalStep.preserve_wellScoped hstepApp hscoped))
have hokA : FunctionSpineOk [(a, bodyA, s.env)] := hnoappA
have hsApp2 :
  {sMixed with control := .term (.app inner arg2)} = sMixed :=
  ChannelConfig.ext rfl rfl rfl rfl
have hrelApp2 : ChannelConfigRel D_0 j_0 realize
  {sMixed with control := .term (.app inner arg2)}
  (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv) := by
  change ChannelConfigRel D_0 j_0 realize
    {s with
      control := .term mixed
      env := s.env
      stack := .function (.closure a bodyA s.env) :: s.stack}

  -
  exact hrelMixed
have hrelInner :=
  channel_config_application D_0 j_0 (s := sMixed) (fn := inner)
    (arg := arg2) hrelApp2
let sInner : ChannelConfig C :=
  {sMixed with
    control := .term inner
    stack := .argument arg2 sMixed.env :: sMixed.stack}
have hstepApp2 : ChannelInternalStep sMixed sInner := by
  have happ :
    ChannelInternalStep
      {sMixed with control := .term (.app inner arg2)} sInner :=
      ChannelInternalStep.application (s := sMixed) (fn := inner)
        (arg := arg2)
  exact hsApp2.symm |> happ
have hscopedInner : ChannelConfig.WellScoped sInner :=
  ChannelInternalStep.preserve_wellScoped hstepApp2 hscopedMixed
have hsApp1 :
  {sInner with
    control := .term (.app (.lam x (.lam y body)) innerApp)} =
    sInner :=
  ChannelConfig.ext rfl rfl rfl rfl
have hrelApp1 : ChannelConfigRel D_0 j_0 realize
  {sInner with
    control := .term (.app (.lam x (.lam y body)) innerApp)}
  (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv) := by
  change ChannelConfigRel D_0 j_0 realize
    {sMixed with
      control := .term inner
      env := sMixed.env
      stack := .argument arg2 sMixed.env :: sMixed.stack}

  -
  exact hrelInner
have hrelLam :=
  channel_config_application D_0 j_0 (s := sInner)
    (fn := .lam x (.lam y body)) (arg := innerApp) hrelApp1
have hrelClo :=
  channel_config_lambda D_0 j_0
    (s :=
      {sInner with
        stack := .argument innerApp sInner.env :: sInner.stack})
    hrelLam
have hrelArg :=
  channel_config_evaluateArgument D_0 j_0
    (s :=
      {sInner with

```

```

        control := .value (.closure x (.lam y body) sInner.env)
        stack := .argument innerApp sInner.env :: sInner.stack})
    (fn := .closure x (.lam y body) sInner.env) (arg := innerApp)
    (callEnv := sInner.env) (rest := sInner.stack) hrelClo
let sArg : ChannelConfig C :=
  {sInner with
    control := .term innerApp
    stack :=
      .function (.closure x (.lam y body) sInner.env) ::
        sInner.stack}
have hstepApp1 : ChannelInternalStep sInner
  {sInner with
    control := .term (.lam x (.lam y body))
    stack := .argument innerApp sInner.env :: sInner.stack} := by
have happ :
  ChannelInternalStep
  {sInner with
    control := .term (.app (.lam x (.lam y body)) innerApp)}
  {sInner with
    control := .term (.lam x (.lam y body))
    stack := .argument innerApp sInner.env :: sInner.stack} :=
  ChannelInternalStep.application (s := sInner)
  (fn := .lam x (.lam y body)) (arg := innerApp)
exact hsApp1.symm |> happ
have hstepLam : ChannelInternalStep
  {sInner with
    control := .term (.lam x (.lam y body))
    stack := .argument innerApp sInner.env :: sInner.stack}
  {sInner with
    control := .value (.closure x (.lam y body) sInner.env)
    stack := .argument innerApp sInner.env :: sInner.stack} :=
  ChannelInternalStep.lambda
  (s :=
    {sInner with
      stack := .argument innerApp sInner.env :: sInner.stack})
  (x := x) (body := .lam y body)
have hstepArg : ChannelInternalStep
  {sInner with
    control := .value (.closure x (.lam y body) sInner.env)
    stack := .argument innerApp sInner.env :: sInner.stack}
  sArg :=
  ChannelInternalStep.evaluateArgument
  (s :=
    {sInner with
      control := .value (.closure x (.lam y body) sInner.env)
      stack := .argument innerApp sInner.env :: sInner.stack})
  (fn := .closure x (.lam y body) sInner.env) (arg := innerApp)
  (callEnv := sInner.env) (rest := sInner.stack)
have hscopedArg : ChannelConfig.WellScoped sArg :=
  ChannelInternalStep.preserve_wellScoped hstepArg
  (ChannelInternalStep.preserve_wellScoped hstepLam
    (ChannelInternalStep.preserve_wellScoped hstepApp1
      hscopedInner))
have hsArg :
  sArg.stack =
    mixedThenFunctionStack [(x, .lam y body, s.env)]
      [(arg2, s.env)] [(a, bodyA, s.env)] := by
  simp [sArg, sInner, sMixed, s, initialChannelConfig, ofConfig,
    initialConfig, mixedThenFunctionStack, argumentThenFunctionStack]
have hok : MixedThenFnOk [(x, .lam y body, s.env)]
  [(arg2, s.env)] [(a, bodyA, s.env)] :=
  <hadminBody, hokA>
have hargs : ArgumentFramesOk [(arg2, s.env)] := by

```

```

intro p hp
simp at hp
cases hp
exact hadmin2
have hinnerApp :
  PresentedChannelConfigCompleteness D_0 j_0 realize sArg
    (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv) :=
app_lam_under_mixed_then_fn_presentedChannelConfigCompleteness
  D_0 j_0 realize [(x, .lam y body, s.env)] [(arg2, s.env)]
  [(a, bodyA, s.env)] hok hargs (s := sArg) (y := z)
  (bodyY := bodyZ) (arg := arg) rfl hsArg hadminZ hadminArg
  hscopedArg
  (by
    change ChannelConfigRel D_0 j_0 realize
      {sInner with
        control := .term innerApp
        env := sInner.env
        stack :=
          .function (.closure x (.lam y body) sInner.env) ::
            sInner.stack}
      -
      exact hrelArg)
have hinner :
  PresentedChannelConfigCompleteness D_0 j_0 realize sInner
    (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv) :=
stacked_lam_app_presentedChannelConfigCompleteness D_0 j_0 realize
  (s := sInner) (x := x) (body := .lam y body) (arg := innerApp)
  rfl
  (by
    change ChannelConfigRel D_0 j_0 realize
      {sMixed with
        control := .term inner
        env := sMixed.env
        stack := .argument arg2 sMixed.env :: sMixed.stack}
      -
      exact hrelInner)
  hinnerApp
have hmixed :
  PresentedChannelConfigCompleteness D_0 j_0 realize sMixed
    (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv) :=
application_presentedChannelConfigCompleteness D_0 j_0 realize
  (s := sMixed) (fn := inner) (arg := arg2) rfl
  (by
    change ChannelConfigRel D_0 j_0 realize
      {s with
        control := .term mixed
        env := s.env
        stack := .function (.closure a bodyA s.env) :: s.stack}
      -
      exact hrelMixed)
  hinner
exact (stacked_lam_app_presentedChannelConfigCompleteness D_0 j_0 realize
  (s := s) (x := a) (body := bodyA) (arg := mixed) hc hrel
  hmixed).complete

theorem closed_lam_mixed_lam_app_lam_admin_noapp_presented_token_adequacy
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (a x y z : Name)
  (bodyA body bodyZ arg arg2 : Term (QubitPrimitive C))

```

```

(hclosed : Closed
  (.app (.lam a bodyA)
    (.app (.app (.lam x (.lam y body)) (.app (.lam z bodyZ) arg))
      arg2)))
(hnoappA : NoApp bodyA)
(hadminBody : AdminNoApp body)
(hadminZ : AdminNoApp bodyZ)
(hadminArg : AdminNoApp arg) (hadmin2 : AdminNoApp arg2)
(quantum : NormalizedDensity 2)
(semanticEnv : Env (HSemanticValue D_0 j_0))
(selectors : List Bool)
(? : HSemanticValue D_0 j_0 -> FiniteInstrumentComp 2 PUnit.{1})
(k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2))
(hk : forall d, k d = (? d).satisfiedTTTheory resultCode)
(i : Nat) (token : TTObservationToken 2) :
token in HardwareAdequacy.selectPath selectors
  (interp (hardwarePrimitive D_0 j_0 realize)
    (.app (.lam a bodyA)
      (.app (.app (.lam x (.lam y body))
        (.app (.lam z bodyZ) arg))
          arg2))
    semanticEnv) i k <->
exists fuel, exists (tree : ChannelTree C
  (initialChannelConfig
    (.app (.lam a bodyA)
      (.app (.app (.lam x (.lam y body))
        (.app (.lam z bodyZ) arg))
          arg2))
    quantum))
  (R : ChannelTreeRealization D_0 j_0 realize tree),
tree.depth <= fuel /\
ResultAvailable tree selectors i /\
TTObservationToken.Holds resultCode token
  ((restrictedInstrument D_0 j_0 realize tree R selectors i).bind
    ?) :=
presented_channel_tree_token_adequacy_iff D_0 j_0 realize
  (initialChannelConfig
    (.app (.lam a bodyA)
      (.app (.app (.lam x (.lam y body)) (.app (.lam z bodyZ) arg))
        arg2))
    quantum)
  (interp (hardwarePrimitive D_0 j_0 realize)
    (.app (.lam a bodyA)
      (.app (.app (.lam x (.lam y body)) (.app (.lam z bodyZ) arg))
        arg2))
    semanticEnv)
  (closed_lam_mixed_lam_app_lam_admin_noapp_presented_channelTreeCompleteness
    D_0 j_0 realize a x y z bodyA body bodyZ arg arg2 hclosed hnoappA
    hadminBody hadminZ hadminArg hadmin2 quantum semanticEnv)
  selectors ? k hk i token

/-- Value completeness under one ordinary closure over a residual
recursive-closure frame. -/
def ValueUnderFunctionRecClosureNil {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (y : Name) (bodyY : Term (QubitPrimitive C))
  (cloY : RuntimeEnv C) (self x : Name)
  (body : Term (QubitPrimitive C)) (clo : RuntimeEnv C) : Prop :=
forall {s : ChannelConfig C} {arg : RuntimeValue C}
  {answer : HSemanticComp D_0 j_0},

```



```

s.control = .value arg ->
s.stack =
  [.function (.closure y bodyY cloY),

```

Lean 4 source (lines 5201–5600)

```

      .function (.recClosure self x body clo)] ->
ChannelConfig.WellScoped s ->
ChannelConfigRel D_0 j_0 realize s answer ->
PresentedChannelConfigCompleteness D_0 j_0 realize s answer

theorem value_under_function_recClosure_nil_presentedChannelConfigCompleteness
{C : Type}
(D_0 : QDomain.{0})
(j_0 : IsContinuousLatticeProjection D_0.carrier
  (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
(realize : C -> HSemanticValue D_0 j_0)
{s : ChannelConfig C} {arg : RuntimeValue C}
{y self x : Name} {bodyY body : Term (QubitPrimitive C)}
{cloY clo : RuntimeEnv C} {answer : HSemanticComp D_0 j_0}
(hc : s.control = .value arg)
(hs : s.stack =
  [.function (.closure y bodyY cloY),
    .function (.recClosure self x body clo)])
(hadminY : AdminNoApp bodyY) (hnoapp : NoApp body)
(hscoped : ChannelConfig.WellScoped s)
(hrel : ChannelConfigRel D_0 j_0 realize s answer) :
PresentedChannelConfigCompleteness D_0 j_0 realize s answer := by
have hse :
  {s with
    control := .value arg
    stack :=
      .function (.closure y bodyY cloY) ::
        [.function (.recClosure self x body clo)]} = s :=
  ChannelConfig.ext hc.symm rfl hs.symm rfl
have hrel' : ChannelConfigRel D_0 j_0 realize
  {s with
    control := .value arg
    stack :=
      .function (.closure y bodyY cloY) ::
        [.function (.recClosure self x body clo)]}
  answer :=
  hse.symm |> hrel
have hrelBody :=
  channel_config_beta D_0 j_0 (s := s) (x := y) (body := bodyY)
  (closureEnv := cloY) (arg := arg)
  (rest := [.function (.recClosure self x body clo)]) hrel'
let sBody : ChannelConfig C :=
  {s with
    control := .term bodyY
    env := RuntimeEnv.bind y arg cloY
    stack := [.function (.recClosure self x body clo)]}
have hstepBeta : ChannelInternalStep s sBody := by
  have happ :
    ChannelInternalStep
      {s with
        control := .value arg
        stack :=
          .function (.closure y bodyY cloY) ::
            [.function (.recClosure self x body clo)]}
      sBody :=
    ChannelInternalStep.beta (s := s) (x := y) (body := bodyY)
    (closureEnv := cloY) (arg := arg)
    (rest := [.function (.recClosure self x body clo)])

```

```

    exact hsEq.symm |> happ
have hscopedBody : ChannelConfig.WellScoped sBody :=
  ChannelInternalStep.preserve_wellScoped hstepBeta hscoped
have hchild :=
  admin_noapp_under_recClosure_nil_presentedChannelConfigCompleteness
    D_0 j_0 realize (s := sBody) (code := bodyY) (self := self)
    (x := x) (body := body) (cloEnv := clo) hadminY rfl rfl hnoapp
    hscopedBody hrelBody
exact beta_presentedChannelConfigCompleteness D_0 j_0 realize
  (s := s) (x := y) (body := bodyY) (closureEnv := cloY)
  (arg := arg) (rest := [.function (.recClosure self x body clo)])
hc hs hrel hchild

theorem pauliX_under_function_recClosure_nil_of_value
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {y : Name} {bodyY : Term (QubitPrimitive C)}
  {cloY : RuntimeEnv C} {self x : Name}
  {body : Term (QubitPrimitive C)} {clo : RuntimeEnv C}
  (hVal : ValueUnderFunctionRecClosureNil D_0 j_0 realize
    y bodyY cloY self x body clo)
  {s : ChannelConfig C} {value : C} {answer : HSemanticComp D_0 j_0}
  (hc : s.control = .term (.prim (.pauliX value)))
  (hs : s.stack =
    [.function (.closure y bodyY cloY),
     .function (.recClosure self x body clo)])
  (hscoped : ChannelConfig.WellScoped s)
  (hrel : ChannelConfigRel D_0 j_0 realize s answer) :
  PresentedChannelConfigCompleteness D_0 j_0 realize s answer := by
have hsPx :
  {s with control := .term (.prim (.pauliX value))} = s :=
  ChannelConfig.ext hc.symm rfl rfl rfl
obtain <semanticEnv, kStack, henv, hstack, rfl> :=
  channelConfigRel_term_inv D_0 j_0 hc hrel
let sVal : ChannelConfig C :=
  {s with
    control := .value (.payload value)
    quantum := applyOperation Qubit.pauliXOp s.quantum}
have hstep : ChannelInternalStep s sVal := by
  have happ :
    ChannelInternalStep
      {s with control := .term (.prim (.pauliX value))}
      sVal :=
    ChannelInternalStep.pauliXPrimitive (s := s) (value := value)
exact hsPx.symm |> happ
have hscopedVal : ChannelConfig.WellScoped sVal :=
  ChannelInternalStep.preserve_wellScoped hstep hscoped
have hrelVal : ChannelConfigRel D_0 j_0 realize sVal
  (kStack
    (semanticUnit (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0) (realize value))) :=
  <semanticUnit (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0) (realize value),
    kStack,
    ControlRel.value _ _ s.env
    (payload_related D_0 j_0 realize value),
    hstack, rfl>
have hval :=
  hVal (s := sVal) (arg := .payload value) rfl hs hscopedVal hrelVal
refine

```

```

{ related := hrel
  complete := ?_ }
constructor
intro selectors i ? k? hk
have hchildEq :=
  hval.complete.selected_result_eq_channelTree_sup_presented
  selectors i ? k? hk
have hden :
  interp (hardwarePrimitive D_0 j_0 realize)
    (.prim (.pauliX value)) semanticEnv =
    taggedEmbed
      (FiniteInstrumentComp.ofOperation Qubit.pauliXOp
        (realize value)) := by
  simp [hardwarePrimitive_pauliX]
have hne : s.stack != [] := by
  rw [hs]
  exact List.cons_ne_nil _ _
let unitVal : HSemanticComp D_0 j_0 :=
  semanticUnit (Q := TTEExternalContinuationPower 2)
  (D_0 := D_0) (j_0 := j_0) (realize value)
let opVal : HSemanticComp D_0 j_0 :=
  taggedEmbed
    (FiniteInstrumentComp.ofOperation Qubit.pauliXOp
      (realize value))
have hchildCoord :
  kStack unitVal (HardwareAdequacy.encodePath selectors i) k? =
  sSup (channelTreeResults D_0 j_0 realize sVal selectors i
    k?) := by
  have hsel :
    HardwareAdequacy.selectPath selectors (kStack unitVal) i k? =
    kStack unitVal (HardwareAdequacy.encodePath selectors i)
    k? :=
    congrArg (fun f => f k?)
    (HardwareAdequacy.selectPath_apply_encode selectors
      (kStack unitVal) i)
  exact hsel.symm.trans hchildEq
have hselParent :
  HardwareAdequacy.selectPath selectors (kStack opVal) i k? =
  kStack opVal (HardwareAdequacy.encodePath selectors i) k? :=
  congrArg (fun f => f k?)
  (HardwareAdequacy.selectPath_apply_encode selectors
    (kStack opVal) i)
have hop :
  kStack opVal (HardwareAdequacy.encodePath selectors i) k? =
  embed (FiniteInstrumentComp.ofOperation Qubit.pauliXOp
    (realize value))
  (ScottMap.const
    (kStack unitVal (HardwareAdequacy.encodePath selectors i)
      k?)) :=
  stackRel_ofOperation_eval D_0 j_0 hstack hne
  Qubit.pauliXOp (realize value)
  (HardwareAdequacy.encodePath selectors i) k?
rw [hden, hselParent, hop, hchildCoord, embed_ofOperation_const_sSup]
apply le_antisymm
* apply sSup_le
  rintro T <r, <fuel, child, R, hdepth, rfl>, rfl>
  apply le_sSup
  refine <fuel + 1, ChannelTree.internal hstep child,
    wrapInternalRealization D_0 j_0 realize hstep child R, ?_, ?_>
  * change child.depth + 1 <= fuel + 1
  omega
  * exact
    (restrictedResult_internal_pauliX D_0 j_0 realize hstep hc

```

```

        child
        (wrapInternalRealization D_0 j_0 realize hstep child R)
        selectors i ? k? hk).symm
* apply sSup_le
rintro T <_, tree, R, _, rfl>
cases tree with
| terminal hterm =>
    cases hterm.control_eq.symm.trans hc
| @internal _ t' h next =>
    have ht : t' = sVal :=
        ChannelInternalStep.eq_config_of_pauliX h hc
    subst t'
    rw [restrictedResult_internal_pauliX D_0 j_0 realize h hc
        next R selectors i ? k? hk]
    apply le_sSup
    refine <restrictedResult D_0 j_0 realize next
        (internalChildRealization D_0 j_0 realize h next R)
        selectors i k?,
        <next.depth, next,
        internalChildRealization D_0 j_0 realize h next R,
        le_rfl, rfl>, rfl>
| external _ hex _ =>
    exact False.elim (ChannelExternalStep.not_prim hex hc)
| probability _ _ _ =>
    cases hc
| probabilityZero _ =>
    cases hc
| probabilityOne _ =>
    cases hc
| measurement _ _ =>
    cases hc

theorem admin_noapp_under_function_recClosure_nil_of_value
{C : Type}
(D_0 : QDomain.{0})
(j_0 : IsContinuousLatticeProjection D_0.carrier
  (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
(realize : C -> HSemanticValue D_0 j_0)
{y : Name} {bodyY : Term (QubitPrimitive C)}
{cloY : RuntimeEnv C} {self x : Name}
{body : Term (QubitPrimitive C)} {clo : RuntimeEnv C}
(hVal : ValueUnderFunctionRecClosureNil D_0 j_0 realize
  y bodyY cloY self x body clo)
{fs : ChannelConfig C} {code : Term (QubitPrimitive C)}
{answer : HSemanticComp D_0 j_0}
(hadmin : AdminNoApp code)
(hc : s.control = .term code)
(hs : s.stack =
  [.function (.closure y bodyY cloY),
   .function (.recClosure self x body clo)])
(hscoped : ChannelConfig.WellScoped s)
(hrel : ChannelConfigRel D_0 j_0 realize s answer) :
PresentedChannelConfigCompleteness D_0 j_0 realize s answer := by
induction code generalizing s answer with
| var z =>
    have hctl := hscoped.left
    rw [hc] at hctl
    obtain <v, hlookup> := hctl.right z (by simp [free])
    have hsVar :
        {s with control := .term (.var z)} = s :=
        ChannelConfig.ext hc.symm rfl rfl rfl
    have hrelVar : ChannelConfigRel D_0 j_0 realize
        {s with control := .term (.var z)} answer :=

```

```

    hsVar.symm |> hrel
  have hrelVal :=
    channel_config_variable D_0 j_0 hlookup hrelVar
  have hscopedVal : ChannelConfig.WellScoped
    {s with control := .value v} :=
    <<hctl.left, hctl.left z v hlookup>, hscoped.right>
  have hval :=
    hVal (s := {s with control := .value v}) (arg := v)
    rfl hs hscopedVal hrelVal
  exact variable_presentedChannelConfigCompleteness D_0 j_0 realize
    hc hlookup hrel hval
| app _ _ =>
  exact False.elim hadmin
| lam z M _ih =>
  have hsLam :
    {s with control := .term (.lam z M)} = s :=
    ChannelConfig.ext hc.symm rfl rfl rfl
  have hrelLam : ChannelConfigRel D_0 j_0 realize
    {s with control := .term (.lam z M)} answer :=
    hsLam.symm |> hrel
  have hrelVal :=
    channel_config_lambda D_0 j_0 (s := s) hrelLam
  have hstepLam : ChannelInternalStep s
    {s with control := .value (.closure z M s.env)} := by
  have happ :
    ChannelInternalStep
    {s with control := .term (.lam z M)}
    {s with control := .value (.closure z M s.env)} :=
    ChannelInternalStep.lambda (s := s) (x := z) (body := M)
    exact hsLam.symm |> happ
  have hscopedVal : ChannelConfig.WellScoped
    {s with control := .value (.closure z M s.env)} :=
    ChannelInternalStep.preserve_wellScoped hstepLam hscoped
  have hval :=
    hVal (s := {s with control := .value (.closure z M s.env)})
    (arg := .closure z M s.env) rfl hs hscopedVal hrelVal
  exact lambda_presentedChannelConfigCompleteness D_0 j_0 realize
    hc hrel hval
| recLam recSelf z M _ih =>
  have hsRec :
    {s with control := .term (.recLam recSelf z M)} = s :=
    ChannelConfig.ext hc.symm rfl rfl rfl
  have hrelRec : ChannelConfigRel D_0 j_0 realize
    {s with control := .term (.recLam recSelf z M)} answer :=
    hsRec.symm |> hrel
  have hrelVal :=
    channel_config_recursive D_0 j_0 (s := s) hrelRec
  have hstepRec : ChannelInternalStep s
    {s with
      control := .value (.recClosure recSelf z M s.env)} := by
  have happ :
    ChannelInternalStep
    {s with control := .term (.recLam recSelf z M)}
    {s with
      control := .value (.recClosure recSelf z M s.env)} :=
    ChannelInternalStep.recursive (s := s) (self := recSelf)
    (arg := z) (body := M)
    exact hsRec.symm |> happ
  have hscopedVal : ChannelConfig.WellScoped
    {s with
      control := .value (.recClosure recSelf z M s.env)} :=
    ChannelInternalStep.preserve_wellScoped hstepRec hscoped
  have hval :=

```

```

    hVal
    (s :=
      {s with
        control := .value (.recClosure recSelf z M s.env)})
    (arg := .recClosure recSelf z M s.env) rfl hs hscopedVal
    hrelVal
  exact recLam_presentedChannelConfigCompleteness D_0 j_0 realize
    hc hrel hval
| intern left right ihL ihR =>
  have <hnaL, hnaR> := hadmin
  have hscopedL :=
    wellScoped_term_child (child := left) hc hscoped
    (fun z hz => by simp [free, hz])
  have hscopedR :=
    wellScoped_term_child (child := right) hc hscoped
    (fun z hz => by simp [free, hz])
  refine intern_related_presentedChannelConfigCompleteness
    D_0 j_0 realize hc hrel ?_ ?_
  * intro semanticEnv k henv hstack
    exact ihL hnaL (s := {s with control := .term left}) rfl hs
      hscopedL
      <interp (hardwarePrimitive D_0 j_0 realize) left semanticEnv, k,
        ControlRel.term left s.env semanticEnv henv, hstack, rfl>
  * intro semanticEnv k henv hstack
    exact ihR hnaR (s := {s with control := .term right}) rfl hs
      hscopedR
      <interp (hardwarePrimitive D_0 j_0 realize) right semanticEnv, k,
        ControlRel.term right s.env semanticEnv henv, hstack, rfl>
| extern _ _ _ =>
  exact False.elim hadmin
| prob p left right ihL ihR =>
  have <hnaL, hnaR> := hadmin
  have hscopedL :=
    wellScoped_term_child (child := left) hc hscoped
    (fun z hz => by simp [free, hz])
  have hscopedR :=
    wellScoped_term_child (child := right) hc hscoped
    (fun z hz => by simp [free, hz])
  refine prob_related_presentedChannelConfigCompleteness
    D_0 j_0 realize hc hrel ?_ ?_
  * intro semanticEnv k quantum henv hstack
    exact ihL hnaL
    (s := {s with control := .term left, quantum := quantum})
    rfl hs <hscopedL.left, hscopedL.right>
    <interp (hardwarePrimitive D_0 j_0 realize) left semanticEnv, k,
      ControlRel.term left s.env semanticEnv henv, hstack, rfl>
  * intro semanticEnv k quantum henv hstack
    exact ihR hnaR
    (s := {s with control := .term right, quantum := quantum})
    rfl hs <hscopedR.left, hscopedR.right>
    <interp (hardwarePrimitive D_0 j_0 realize) right semanticEnv, k,
      ControlRel.term right s.env semanticEnv henv, hstack, rfl>
| prim prim =>
  cases prim with
| ret value =>
  have hsRet :
    {s with control := .term (.prim (.ret value))} = s :=
    ChannelConfig.ext hc.symm rfl rfl rfl
  have hrelRet : ChannelConfigRel D_0 j_0 realize
    {s with control := .term (.prim (.ret value))} answer :=
    hsRet.symm |> hrel
  have hrelVal :=
    channel_config_return D_0 j_0 hrelRet

```

```

have hstepRet : ChannelInternalStep s
  {s with control := .value (.payload value)} := by
have happ :
  ChannelInternalStep
    {s with control := .term (.prim (.ret value))}
    {s with control := .value (.payload value)} :=
  ChannelInternalStep.returnPrimitive (s := s)
    (value := value)
exact hsRet.symm |> happ
have hscopedVal : ChannelConfig.WellScoped
  {s with control := .value (.payload value)} :=
  ChannelInternalStep.preserve_wellScoped hstepRet hscoped
have hval :=
  hVal (s := {s with control := .value (.payload value)})
    (arg := .payload value) rfl hs hscopedVal hrelVal
exact return_presentedChannelConfigCompleteness D_0 j_0 realize
  hc hrel hval
| pauliX value =>
  exact
    pauliX_under_function_recClosure_nil_of_value
      D_0 j_0 realize hVal hc hs hscoped hrel
| measureZ _ _ =>
  exact False.elim hadmin

theorem admin_noapp_under_function_recClosure_nil_presentedChannelConfigCompleteness
  {C : Type}
  (D_0 : QDomain.{0})

```

Lean 4 source (lines 5601–6000)

```

(j_0 : IsContinuousLatticeProjection D_0.carrier
  (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
(realize : C -> HSemanticValue D_0 j_0)
{s : ChannelConfig C} {code : Term (QubitPrimitive C)}
{y self x : Name} {bodyY body : Term (QubitPrimitive C)}
{cloY clo : RuntimeEnv C} {answer : HSemanticComp D_0 j_0}
(hadmin : AdminNoApp code)
(hc : s.control = .term code)
(hs : s.stack =
  [.function (.closure y bodyY cloY),
   .function (.recClosure self x body clo)])
(hadminY : AdminNoApp bodyY) (hnoapp : NoApp body)
(hscoped : ChannelConfig.WellScoped s)
(hrel : ChannelConfigRel D_0 j_0 realize s answer) :
PresentedChannelConfigCompleteness D_0 j_0 realize s answer := by
have hVal : ValueUnderFunctionRecClosureNil D_0 j_0 realize
  y bodyY cloY self x body clo := by
  intro s' arg answer' hc' hs' hscoped' hrel'
  exact
    value_under_function_recClosure_nil_presentedChannelConfigCompleteness
      D_0 j_0 realize hc' hs' hadminY hnoapp hscoped' hrel'
exact admin_noapp_under_function_recClosure_nil_of_value
  D_0 j_0 realize hVal hadmin hc hs hscoped hrel

/-- Inner `app (lam y bodyY) arg` under one residual recursive-closure
frame. -/
theorem app_lam_under_recClosure_nil_presentedChannelConfigCompleteness
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} {y self x : Name}
  {bodyY body arg : Term (QubitPrimitive C)}

```

```

{clo : RuntimeEnv C} {answer : HSemanticComp D_0 j_0}
(hc : s.control = .term (.app (.lam y bodyY) arg))
(hs : s.stack = [.function (.recClosure self x body clo)])
(hadminY : AdminNoApp bodyY) (hadminArg : AdminNoApp arg)
(hnoapp : NoApp body)
(hscoped : ChannelConfig.WellScoped s)
(hrel : ChannelConfigRel D_0 j_0 realize s answer) :
PresentedChannelConfigCompleteness D_0 j_0 realize s answer := by
have hsApp :
  {s with control := .term (.app (.lam y bodyY) arg)} = s :=
  ChannelConfig.ext hc.symm rfl rfl rfl
have hrelApp : ChannelConfigRel D_0 j_0 realize
  {s with control := .term (.app (.lam y bodyY) arg)} answer :=
  hsApp.symm |> hrel
have hrelLam :=
  channel_config_application D_0 j_0 (s := s)
  (fn := .lam y bodyY) (arg := arg) hrelApp
have hrelClo :=
  channel_config_lambda D_0 j_0
  (s := {s with stack := .argument arg s.env :: s.stack})
  hrelLam
have hrelArg :=
  channel_config_evaluateArgument D_0 j_0
  (s :=
    {s with
      control := .value (.closure y bodyY s.env)
      stack := .argument arg s.env :: s.stack})
  (fn := .closure y bodyY s.env) (arg := arg)
  (callEnv := s.env) (rest := s.stack) hrelClo
let sArg : ChannelConfig C :=
  {s with
    control := .term arg
    stack := .function (.closure y bodyY s.env) :: s.stack}
have hstepApp : ChannelInternalStep s
  {s with
    control := .term (.lam y bodyY)
    stack := .argument arg s.env :: s.stack} := by
have happ :
  ChannelInternalStep
  {s with control := .term (.app (.lam y bodyY) arg)}
  {s with
    control := .term (.lam y bodyY)
    stack := .argument arg s.env :: s.stack} :=
  ChannelInternalStep.application (s := s)
  (fn := .lam y bodyY) (arg := arg)
exact hsApp.symm |> happ
have hstepLam : ChannelInternalStep
  {s with
    control := .term (.lam y bodyY)
    stack := .argument arg s.env :: s.stack}
  {s with
    control := .value (.closure y bodyY s.env)
    stack := .argument arg s.env :: s.stack} :=
  ChannelInternalStep.lambda
  (s := {s with stack := .argument arg s.env :: s.stack})
  (x := y) (body := bodyY)
have hstepArg : ChannelInternalStep
  {s with
    control := .value (.closure y bodyY s.env)
    stack := .argument arg s.env :: s.stack}
  sArg :=
  ChannelInternalStep.evaluateArgument
  (s :=

```



```

      {s with
        control := .value (.closure y bodyY s.env)
        stack := .argument arg s.env :: s.stack}}
      (fn := .closure y bodyY s.env) (arg := arg)
      (callEnv := s.env) (rest := s.stack)
have hscopedArg : ChannelConfig.WellScoped sArg :=
  ChannelInternalStep.preserve_wellScoped hstepArg
  (ChannelInternalStep.preserve_wellScoped hstepLam
    (ChannelInternalStep.preserve_wellScoped hstepApp hscoped))
have hsArg :
  sArg.stack =
    [.function (.closure y bodyY s.env),
     .function (.recClosure self x body clo)] := by
  simp [sArg, hs]
have harg :
  PresentedChannelConfigCompleteness D_0 j_0 realize sArg answer :=
  admin_noapp_under_function_recClosure_nil_presentedChannelConfigCompleteness
  D_0 j_0 realize (s := sArg) (code := arg) (y := y) (self := self)
  (x := x) (bodyY := bodyY) (body := body) (cloY := s.env)
  (clo := clo) hadminArg rfl hsArg hadminY hnoapp hscopedArg
  (by
    change ChannelConfigRel D_0 j_0 realize
      {s with
        control := .term arg
        env := s.env
        stack :=
          .function (.closure y bodyY s.env) :: s.stack}
      -
      exact hrelArg)
exact stacked_lam_app_presentedChannelConfigCompleteness D_0 j_0 realize
  (s := s) (x := y) (body := bodyY) (arg := arg) hc hrel harg

/-- Closed `app (recLam self x body) (app (lam y bodyY) arg)` -/
theorem closed_recLam_app_lam_admin_noapp_presented_channelTreeCompleteness
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (self x y : Name) (body bodyY arg : Term (QubitPrimitive C))
  (hclosed : Closed (.app (.recLam self x body) (.app (.lam y bodyY) arg)))
  (hnoapp : NoApp body)
  (hadminY : AdminNoApp bodyY) (hadminArg : AdminNoApp arg)
  (quantum : NormalizedDensity 2)
  (semanticEnv : Env (HSemanticValue D_0 j_0)) :
  PresentedChannelTreeCompleteness D_0 j_0 realize
    (initialChannelConfig
      (.app (.recLam self x body) (.app (.lam y bodyY) arg)) quantum)
    (interp (hardwarePrimitive D_0 j_0 realize)
      (.app (.recLam self x body) (.app (.lam y bodyY) arg))
      semanticEnv) := by
  let inner : Term (QubitPrimitive C) := .app (.lam y bodyY) arg
  let code : Term (QubitPrimitive C) := .app (.recLam self x body) inner
  let s : ChannelConfig C := initialChannelConfig code quantum
  have hc : s.control = .term code := rfl
  have hrel :=
    initialChannelConfig_related D_0 j_0 realize code quantum semanticEnv
  have hscoped :=
    initialChannelConfig_wellScoped hclosed quantum
  have hsApp :
    {s with control := .term (.app (.recLam self x body) inner)} =
    s :=
    ChannelConfig.ext hc.symm rfl rfl rfl

```

```

have hrelApp : ChannelConfigRel D_0 j_0 realize
  {s with control := .term (.app (.recLam self x body) inner)}
  (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv) :=
  hsApp.symm |> hrel
have hrelRec :=
  channel_config_application D_0 j_0 (s := s)
  (fn := .recLam self x body) (arg := inner) hrelApp
have hrelClo :=
  channel_config_recursive D_0 j_0
  (s := {s with stack := .argument inner s.env :: s.stack})
  hrelRec
have hrelInner :=
  channel_config_evaluateArgument D_0 j_0
  (s :=
    {s with
      control := .value (.recClosure self x body s.env)
      stack := .argument inner s.env :: s.stack})
  (fn := .recClosure self x body s.env) (arg := inner)
  (callEnv := s.env) (rest := s.stack) hrelClo
let sInner : ChannelConfig C :=
  {s with
    control := .term inner
    stack := .function (.recClosure self x body s.env) :: s.stack}
have hstepApp : ChannelInternalStep s
  {s with
    control := .term (.recLam self x body)
    stack := .argument inner s.env :: s.stack} := by
  have happ :
    ChannelInternalStep
    {s with control := .term (.app (.recLam self x body) inner)}
    {s with
      control := .term (.recLam self x body)
      stack := .argument inner s.env :: s.stack} :=
    ChannelInternalStep.application (s := s)
    (fn := .recLam self x body) (arg := inner)
  exact hsApp.symm |> happ
have hstepRec : ChannelInternalStep
  {s with
    control := .term (.recLam self x body)
    stack := .argument inner s.env :: s.stack}
  {s with
    control := .value (.recClosure self x body s.env)
    stack := .argument inner s.env :: s.stack} :=
  ChannelInternalStep.recursive
  (s := {s with stack := .argument inner s.env :: s.stack})
  (self := self) (arg := x) (body := body)
have hstepInner : ChannelInternalStep
  {s with
    control := .value (.recClosure self x body s.env)
    stack := .argument inner s.env :: s.stack}
  sInner :=
  ChannelInternalStep.evaluateArgument
  (s :=
    {s with
      control := .value (.recClosure self x body s.env)
      stack := .argument inner s.env :: s.stack})
  (fn := .recClosure self x body s.env) (arg := inner)
  (callEnv := s.env) (rest := s.stack)
have hscopedInner : ChannelConfig.WellScoped sInner :=
  ChannelInternalStep.preserve_wellScoped hstepInner
  (ChannelInternalStep.preserve_wellScoped hstepRec
    (ChannelInternalStep.preserve_wellScoped hstepApp hscoped))
have hsInner :

```

```

    sInner.stack = [.function (.recClosure self x body s.env)] := by
    simp [sInner, s, initialChannelConfig, ofConfig, initialConfig]
have hinner :
  PresentedChannelConfigCompleteness D_0 j_0 realize sInner
    (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv) :=
app_lam_under_recClosure_nil_presentedChannelConfigCompleteness
  D_0 j_0 realize (s := sInner) (y := y) (self := self) (x := x)
  (bodyY := bodyY) (body := body) (arg := arg) (clo := s.env)
  rfl hsInner hadminY hadminArg hnoapp hscopedInner
  (by
    change ChannelConfigRel D_0 j_0 realize
    {s with
      control := .term inner
      env := s.env
      stack :=
        .function (.recClosure self x body s.env) :: s.stack}
    -
    exact hrelInner)
exact (stacked_recLam_app_presentedChannelConfigCompleteness
  D_0 j_0 realize (s := s) (self := self) (x := x) (body := body)
  (arg := inner) hc hrel hinner).complete

theorem closed_recLam_app_lam_admin_noapp_presented_token_adequacy
{C : Type}
(D_0 : QDomain.{0})
(j_0 : IsContinuousLatticeProjection D_0.carrier
  (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
(realize : C -> HSemanticValue D_0 j_0)
(self x y : Name) (body bodyY arg : Term (QubitPrimitive C))
(hclosed : Closed (.app (.recLam self x body) (.app (.lam y bodyY) arg)))
(hnoapp : NoApp body)
(hadminY : AdminNoApp bodyY) (hadminArg : AdminNoApp arg)
(quantum : NormalizedDensity 2)
(semanticEnv : Env (HSemanticValue D_0 j_0))
(selectors : List Bool)
(? : HSemanticValue D_0 j_0 -> FiniteInstrumentComp 2 PUnit.{1})
(k : ScottMap (HSemanticValue D_0 j_0) (TTResult 2))
(hk : forall d, k d = (? d).satisfiedTTTheory resultCode)
(i : Nat) (token : TTObservationToken 2) :
token in HardwareAdequacy.selectPath selectors
  (interp (hardwarePrimitive D_0 j_0 realize)
    (.app (.recLam self x body) (.app (.lam y bodyY) arg))
    semanticEnv) i k <=>
exists fuel, exists (tree : ChannelTree C
  (initialChannelConfig
    (.app (.recLam self x body) (.app (.lam y bodyY) arg))
    quantum))
  (R : ChannelTreeRealization D_0 j_0 realize tree),
tree.depth <= fuel /\
ResultAvailable tree selectors i /\
TTObservationToken.Holds resultCode token
  ((restrictedInstrument D_0 j_0 realize tree R selectors i).bind
  ?) :=
presented_channel_tree_token_adequacy_iff D_0 j_0 realize
  (initialChannelConfig
    (.app (.recLam self x body) (.app (.lam y bodyY) arg)) quantum)
  (interp (hardwarePrimitive D_0 j_0 realize)
    (.app (.recLam self x body) (.app (.lam y bodyY) arg))
    semanticEnv)
  (closed_recLam_app_lam_admin_noapp_presented_channelTreeCompleteness
    D_0 j_0 realize self x y body bodyY arg hclosed hnoapp hadminY
    hadminArg quantum semanticEnv)
  selectors ? k hk i token

```

```

/-- Administrative NoApp at an empty stack, including lambdas whose
bodies still contain applications. -/
theorem empty_stack_admin_noapp_presentedChannelTreeCompleteness
  {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  {s : ChannelConfig C} {code : Term (QubitPrimitive C)}
  {semanticEnv : Env (HSemanticValue D_0 j_0)}
  (hadmin : AdminNoApp code)
  (hc : s.control = .term code) (hs : s.stack = [])
  (hscoped : ChannelConfig.WellScoped s)
  (henv : EnvRel D_0 j_0 realize s.env semanticEnv) :
  PresentedChannelTreeCompleteness D_0 j_0 realize s
    (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv) := by
induction code generalizing s semanticEnv with
| var x =>
  have hctl := hscoped.left
  rw [hc] at hctl
  obtain <v, hlookup> := hctl.right x (by simp [free])
  have hrel :
    ChannelConfigRel D_0 j_0 realize
      {s with control := .term (.var x)}
      (interp (hardwarePrimitive D_0 j_0 realize) (.var x)
        semanticEnv) :=
    <interp (hardwarePrimitive D_0 j_0 realize) (.var x) semanticEnv,
      id, ControlRel.term _ s.env semanticEnv henv,
      (by rw [hs]; exact StackRel.nil), rfl>
  have hrelv :=
    channel_config_variable D_0 j_0 hlookup hrel
  have hscopedv : ChannelConfig.WellScoped
    {s with control := .value v} :=
    <<hctl.left, hctl.left x v hlookup>, hscoped.right>
  have hchild :
    PresentedChannelConfigCompleteness D_0 j_0 realize
      {s with control := .value v}
      (interp (hardwarePrimitive D_0 j_0 realize) (.var x)
        semanticEnv) :=
  { related := hrelv
    complete :=
      terminal_presentedChannelTreeCompleteness D_0 j_0 realize
        (s := {s with control := .value v})
        <v, rfl, hs> hscopedv hrelv }
  exact PresentedChannelTreeCompleteness.congr
    (show {s with control := .term (.var x)} = s from
      ChannelConfig.ext hc.symm rfl rfl rfl)
  rfl
  (variable_presentedChannelConfigCompleteness D_0 j_0 realize
    (s := {s with control := .term (.var x)}) rfl hlookup hrel
    hchild).complete
| app _ _ =>
  exact False.elim hadmin
| lam x body _ih =>
  exact lam_terminal_presentedChannelTreeCompleteness D_0 j_0 realize
    hc hs hscoped henv
| recLam self arg body _ih =>
  exact recLam_terminal_presentedChannelTreeCompleteness D_0 j_0 realize
    hc hs hscoped henv
| intern left right ihL ihR =>
  have <hnaL, hnaR> := hadmin
  have hctl := hscoped.left

```

```

rw [hc] at hctl
have hscopedL : ChannelConfig.WellScoped
  {s with control := .term left} :=
  <<hctl.left, fun x hx => hctl.right x (by simp [free, hx])>,
  hscoped.right>
have hscopedR : ChannelConfig.WellScoped
  {s with control := .term right} :=
  <<hctl.left, fun x hx => hctl.right x (by simp [free, hx])>,
  hscoped.right>
have hL :=
  ihL hnaL (s := {s with control := .term left})
  (semanticEnv := semanticEnv) rfl hs hscopedL henv
have hR :=
  ihR hnaR (s := {s with control := .term right})
  (semanticEnv := semanticEnv) rfl hs hscopedR henv
exact PresentedChannelTreeCompleteness.congr
  (show {s with control := .term (.intern left right)} = s from
    ChannelConfig.ext hc.symm rfl rfl rfl)
rfl
(intern_empty_presentedChannelTreeCompleteness D_0 j_0 realize
  s left right semanticEnv hL hR)
| extern _ _ =>
  exact False.elim hadmin
| prob p left right ihL ihR =>
  have <hnaL, hnaR> := hadmin
  have hctl := hscoped.left
  rw [hc] at hctl
  have hscopedL : ChannelConfig.WellScoped
    {s with control := .term left} :=
    <<hctl.left, fun x hx => hctl.right x (by simp [free, hx])>,
    hscoped.right>
  have hscopedR : ChannelConfig.WellScoped
    {s with control := .term right} :=
    <<hctl.left, fun x hx => hctl.right x (by simp [free, hx])>,
    hscoped.right>
  if hI : 0 <= p /\ p <= 1 then
    if hp0 : p = 0 then
      subst p
      have hR :=
        ihR hnaR (s := {s with control := .term right})
        (semanticEnv := semanticEnv) rfl hs hscopedR henv
      exact PresentedChannelTreeCompleteness.congr
        (show {s with control := .term (.prob 0 left right)} = s from
          ChannelConfig.ext hc.symm rfl rfl rfl)
      rfl
      (prob_zero_empty_presentedChannelTreeCompleteness D_0 j_0 realize
        s left right semanticEnv hR)
    else if hp1 : p = 1 then
      subst p
      have hL :=
        ihL hnaL (s := {s with control := .term left})

```

Lean 4 source (lines 6001–6400)

```

  (semanticEnv := semanticEnv) rfl hs hscopedL henv
  exact PresentedChannelTreeCompleteness.congr
    (show {s with control := .term (.prob 1 left right)} = s from
      ChannelConfig.ext hc.symm rfl rfl rfl)
  rfl
  (prob_one_empty_presentedChannelTreeCompleteness D_0 j_0 realize
    s left right semanticEnv hL)
else
  have hpOne : p != 0 := hp0
  have hpOne : p != 1 := hp1

```

```

have hp_0 : 0 < p := lt_of_le_of_ne hI.1 hpOne.symm
have hp_1 : p < 1 := lt_of_le_of_ne hI.2 hpOne
have hL :=
  ihL hnaL
  (s :=
    { s with
      control := .term left
      quantum := applyOperation
        (sourceProbabilityOperation p hp_0.le hp_1.le)
        s.quantum })
  (semanticEnv := semanticEnv) rfl hs hscopedL henv
have hR :=
  ihR hnaR
  (s :=
    { s with
      control := .term right
      quantum := applyOperation
        (sourceProbabilityOperation (1 - p)
          (sub_nonneg.mpr hp_1.le) (by linarith))
        s.quantum })
  (semanticEnv := semanticEnv) rfl hs hscopedR henv
exact PresentedChannelTreeCompleteness.congr
  (show {s with control := .term (.prob p left right)} = s from
    ChannelConfig.ext hc.symm rfl rfl rfl)
rfl
(prob_empty_presented_of_presented_children D_0 j_0 realize
  s p hp_0 hp_1 left right semanticEnv hL hR)
else
  exact PresentedChannelTreeCompleteness.congr
    (show {s with control := .term (.prob p left right)} = s from
      ChannelConfig.ext hc.symm rfl rfl rfl)
  rfl
  (prob_invalid_empty_presentedChannelTreeCompleteness D_0 j_0 realize
    s p hI left right semanticEnv)
| prim p =>
  cases p with
  | ret value =>
    exact return_empty_presentedChannelTreeCompleteness D_0 j_0 realize
      hc hs hscoped henv
  | pauliX value =>
    exact PresentedChannelTreeCompleteness.congr
      (show {s with control := .term (.prim (.pauliX value))} = s from
        ChannelConfig.ext hc.symm rfl rfl rfl)
    rfl
    (pauliX_empty_presentedChannelTreeCompleteness D_0 j_0 realize
      s value hs semanticEnv)
| measureZ _ _ =>
  exact False.elim hadmin

/-- Value completeness under one closure whose body is already
presented at the empty stack. -/
def ValueUnderClosureOfBody {C : Type}
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
  (realize : C -> HSemanticValue D_0 j_0)
  (x : Name) (body : Term (QubitPrimitive C))
  (cloEnv : RuntimeEnv C) : Prop :=
forall {s : ChannelConfig C} {arg : RuntimeValue C}
  {answer : HSemanticComp D_0 j_0},
  s.control = .value arg ->
  s.stack = [.function (.closure x body cloEnv)] ->
  ChannelConfig.WellScoped s ->

```

```

ChannelConfigRel D_0 j_0 realize s answer ->
PresentedChannelConfigCompleteness D_0 j_0 realize s answer

theorem value_under_closure_of_presented_body
{C : Type}
(D_0 : QDomain.{0})
(j_0 : IsContinuousLatticeProjection D_0.carrier
  (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
(realize : C -> HSemanticValue D_0 j_0)
{s : ChannelConfig C} {arg : RuntimeValue C} {x : Name}
{body : Term (QubitPrimitive C)} {cloEnv : RuntimeEnv C}
{answer : HSemanticComp D_0 j_0}
(hc : s.control = .value arg)
(hs : s.stack = [.function (.closure x body cloEnv)])
(_hscoped : ChannelConfig.WellScoped s)
(hrel : ChannelConfigRel D_0 j_0 realize s answer)
(hbody : PresentedChannelConfigCompleteness D_0 j_0 realize
  {s with
    control := .term body
    env := RuntimeEnv.bind x arg cloEnv
    stack := []}
  answer) :
  PresentedChannelConfigCompleteness D_0 j_0 realize s answer :=
  beta_presentedChannelConfigCompleteness D_0 j_0 realize
  (s := s) (x := x) (body := body) (closureEnv := cloEnv)
  (arg := arg) (rest := []) hc hs hrel hbody

theorem pauliX_under_closure_of_value
{C : Type}
(D_0 : QDomain.{0})
(j_0 : IsContinuousLatticeProjection D_0.carrier
  (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
(realize : C -> HSemanticValue D_0 j_0)
{x : Name} {body : Term (QubitPrimitive C)} {cloEnv : RuntimeEnv C}
(hVal : ValueUnderClosureOfBody D_0 j_0 realize x body cloEnv)
{s : ChannelConfig C} {value : C} {answer : HSemanticComp D_0 j_0}
(hc : s.control = .term (.prim (.pauliX value)))
(hs : s.stack = [.function (.closure x body cloEnv)])
(hscoped : ChannelConfig.WellScoped s)
(hrel : ChannelConfigRel D_0 j_0 realize s answer) :
  PresentedChannelConfigCompleteness D_0 j_0 realize s answer := by
  have hsPx :
    {s with control := .term (.prim (.pauliX value))} = s :=
    ChannelConfig.ext hc.symm rfl rfl rfl
  obtain <semanticEnv, kStack, henv, hstack, rfl> :=
    channelConfigRel_term_inv D_0 j_0 hc hrel
  let sVal : ChannelConfig C :=
    {s with
      control := .value (.payload value)
      quantum := applyOperation Qubit.pauliXOp s.quantum}
  have hstep : ChannelInternalStep s sVal := by
    have happ :
      ChannelInternalStep
        {s with control := .term (.prim (.pauliX value))}
        sVal :=
      ChannelInternalStep.pauliXPrimitive (s := s) (value := value)
  exact hsPx.symm |> happ
  have hscopedVal : ChannelConfig.WellScoped sVal :=
    ChannelInternalStep.preserve_wellScoped hstep hscoped
  have hrelVal : ChannelConfigRel D_0 j_0 realize sVal
    (kStack
      (semanticUnit (Q := TTEExternalContinuationPower 2)
        (D_0 := D_0) (j_0 := j_0) (realize value))) :=

```

```

    <semanticUnit (Q := TTEExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0) (realize value),
      kStack,
      ControlRel.value _ _ s.env
      (payload_related D_0 j_0 realize value),
      hstack, rfl>
have hval :=
  hVal (s := sVal) (arg := .payload value) rfl hs hscopedVal hrelVal
refine
  { related := hrel
    complete := ?_ }
constructor
intro selectors i ? k? hk
have hchildEq :=
  hval.complete.selected_result_eq_channelTree_sup_presented
  selectors i ? k? hk
have hden :
  interp (hardwarePrimitive D_0 j_0 realize)
    (.prim (.pauliX value)) semanticEnv =
    taggedEmbed
      (FiniteInstrumentComp.ofOperation Qubit.pauliXOp
        (realize value)) := by
    simp [hardwarePrimitive_pauliX]
have hne : s.stack != [] := by
  rw [hs]
  exact List.cons_ne_nil _ _
let unitVal : HSemanticComp D_0 j_0 :=
  semanticUnit (Q := TTEExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0) (realize value)
let opVal : HSemanticComp D_0 j_0 :=
  taggedEmbed
    (FiniteInstrumentComp.ofOperation Qubit.pauliXOp
      (realize value))
have hchildCoord :
  kStack unitVal (HardwareAdequacy.encodePath selectors i) k? =
  sSup (channelTreeResults D_0 j_0 realize sVal selectors i
    k?) := by
  have hsel :
    HardwareAdequacy.selectPath selectors (kStack unitVal) i k? =
    kStack unitVal (HardwareAdequacy.encodePath selectors i)
    k? :=
    congrArg (fun f => f k?)
    (HardwareAdequacy.selectPath_apply_encode selectors
      (kStack unitVal) i)
  exact hsel.symm.trans hchildEq
have hselParent :
  HardwareAdequacy.selectPath selectors (kStack opVal) i k? =
  kStack opVal (HardwareAdequacy.encodePath selectors i) k? :=
  congrArg (fun f => f k?)
  (HardwareAdequacy.selectPath_apply_encode selectors
    (kStack opVal) i)
have hop :
  kStack opVal (HardwareAdequacy.encodePath selectors i) k? =
  embed (FiniteInstrumentComp.ofOperation Qubit.pauliXOp
    (realize value))
    (ScottMap.const
      (kStack unitVal (HardwareAdequacy.encodePath selectors i)
        k?)) :=
  stackRel_ofOperation_eval D_0 j_0 hstack hne
  Qubit.pauliXOp (realize value)
  (HardwareAdequacy.encodePath selectors i) k?
rw [hden, hselParent, hop, hchildCoord, embed_ofOperation_const_sSup]
apply le_antisymm

```



```

* apply sSup_le
rintro T <r, <fuel, child, R, hdepth, rfl>, rfl>
apply le_sSup
refine <fuel + 1, ChannelTree.internal hstep child,
  wrapInternalRealization D_0 j_0 realize hstep child R, ?_, ?_>
* change child.depth + 1 <= fuel + 1
omega
* exact
  (restrictedResult_internal_pauliX D_0 j_0 realize hstep hc
   child
   (wrapInternalRealization D_0 j_0 realize hstep child R)
   selectors i ? k? hk).symm
* apply sSup_le
rintro T <_, tree, R, _, rfl>
cases tree with
| terminal hterm =>
  cases hterm.control_eq.symm.trans hc
| @internal _ t' h next =>
  have ht : t' = sVal :=
    ChannelInternalStep.eq_config_of_pauliX h hc
  subst t'
  rw [restrictedResult_internal_pauliX D_0 j_0 realize h hc
    next R selectors i ? k? hk]
  apply le_sSup
  refine <restrictedResult D_0 j_0 realize next
    (internalChildRealization D_0 j_0 realize h next R)
    selectors i k?,
    <next.depth, next,
    internalChildRealization D_0 j_0 realize h next R,
    le_rfl, rfl>, rfl>
| external _ hex _ =>
  exact False.elim (ChannelExternalStep.not_prim hex hc)
| probability _ _ _ =>
  cases hc
| probabilityZero _ =>
  cases hc
| probabilityOne _ =>
  cases hc
| measurement _ _ =>
  cases hc

theorem admin_noapp_under_closure_of_value
{C : Type}
(D_0 : QDomain.{0})
(j_0 : IsContinuousLatticeProjection D_0.carrier
  (QuantumFunctor (QModel (TTEExternalContinuationPower 2)) D_0.carrier))
(realize : C -> HSemanticValue D_0 j_0)
{x : Name} {body : Term (QubitPrimitive C)} {cloEnv : RuntimeEnv C}
(hVal : ValueUnderClosureOfBody D_0 j_0 realize x body cloEnv)
{s : ChannelConfig C} {code : Term (QubitPrimitive C)}
{answer : HSemanticComp D_0 j_0}
(hadmin : AdminNoApp code)
(hc : s.control = .term code)
(hs : s.stack = [.function (.closure x body cloEnv)])
(hscoped : ChannelConfig.WellScoped s)
(hrel : ChannelConfigRel D_0 j_0 realize s answer) :
PresentedChannelConfigCompleteness D_0 j_0 realize s answer := by
induction code generalizing s answer with
| var z =>
  have hctl := hscoped.left
  rw [hc] at hctl
  obtain <v, hlookup> := hctl.right z (by simp [free])
  have hsVar :

```

```

      {s with control := .term (.var z)} = s :=
    ChannelConfig.ext hc.symm rfl rfl rfl
  have hrelVar : ChannelConfigRel D_0 j_0 realize
    {s with control := .term (.var z)} answer :=
    hsVar.symm |> hrel
  have hrelVal :=
    channel_config_variable D_0 j_0 hlookup hrelVar
  have hscopedVal : ChannelConfig.WellScoped
    {s with control := .value v} :=
    <<hctl.left, hctl.left z v hlookup>, hscoped.right>
  have hval :=
    hVal (s := {s with control := .value v}) (arg := v)
    rfl hs hscopedVal hrelVal
  exact variable_presentedChannelConfigCompleteness D_0 j_0 realize
    hc hlookup hrel hval
| app _ _ =>
  exact False.elim hadmin
| lam z M _ih =>
  have hsLam :
    {s with control := .term (.lam z M)} = s :=
    ChannelConfig.ext hc.symm rfl rfl rfl
  have hrelLam : ChannelConfigRel D_0 j_0 realize
    {s with control := .term (.lam z M)} answer :=
    hsLam.symm |> hrel
  have hrelVal :=
    channel_config_lambda D_0 j_0 (s := s) hrelLam
  have hstepLam : ChannelInternalStep s
    {s with control := .value (.closure z M s.env)} := by
  have happ :
    ChannelInternalStep
    {s with control := .term (.lam z M)}
    {s with control := .value (.closure z M s.env)} :=
    ChannelInternalStep.lambda (s := s) (x := z) (body := M)
    exact hsLam.symm |> happ
  have hscopedVal : ChannelConfig.WellScoped
    {s with control := .value (.closure z M s.env)} :=
    ChannelInternalStep.preserve_wellScoped hstepLam hscoped
  have hval :=
    hVal (s := {s with control := .value (.closure z M s.env)})
    (arg := .closure z M s.env) rfl hs hscopedVal hrelVal
  exact lambda_presentedChannelConfigCompleteness D_0 j_0 realize
    hc hrel hval
| recLam self z M _ih =>
  have hsRec :
    {s with control := .term (.recLam self z M)} = s :=
    ChannelConfig.ext hc.symm rfl rfl rfl
  have hrelRec : ChannelConfigRel D_0 j_0 realize
    {s with control := .term (.recLam self z M)} answer :=
    hsRec.symm |> hrel
  have hrelVal :=
    channel_config_recursive D_0 j_0 (s := s) hrelRec
  have hstepRec : ChannelInternalStep s
    {s with control := .value (.recClosure self z M s.env)} := by
  have happ :
    ChannelInternalStep
    {s with control := .term (.recLam self z M)}
    {s with
      control := .value (.recClosure self z M s.env)} :=
    ChannelInternalStep.recursive (s := s) (self := self)
    (arg := z) (body := M)
    exact hsRec.symm |> happ
  have hscopedVal : ChannelConfig.WellScoped
    {s with control := .value (.recClosure self z M s.env)} :=

```

```

    ChannelInternalStep.preserve_wellScoped hstepRec hscoped
have hval :=
  hVal
  (s :=
    {s with control := .value (.recClosure self z M s.env)})
  (arg := .recClosure self z M s.env) rfl hs hscopedVal hrelVal
exact recLam_presentedChannelConfigCompleteness D_0 j_0 realize
  hc hrel hval
| intern left right ihL ihR =>
  have <hnaL, hnaR> := hadmin
  have hscopedL :=
    wellScoped_term_child (child := left) hc hscoped
    (fun z hz => by simp [free, hz])
  have hscopedR :=
    wellScoped_term_child (child := right) hc hscoped
    (fun z hz => by simp [free, hz])
  refine intern_related_presentedChannelConfigCompleteness
    D_0 j_0 realize hc hrel ?_ ?_
  * intro semanticEnv k henv hstack
    exact ihL hnaL (s := {s with control := .term left}) rfl hs
      hscopedL
    <interp (hardwarePrimitive D_0 j_0 realize) left semanticEnv, k,
      ControlRel.term left s.env semanticEnv henv, hstack, rfl>
  * intro semanticEnv k henv hstack
    exact ihR hnaR (s := {s with control := .term right}) rfl hs
      hscopedR
    <interp (hardwarePrimitive D_0 j_0 realize) right semanticEnv, k,
      ControlRel.term right s.env semanticEnv henv, hstack, rfl>
| extern _ _ _ =>
  exact False.elim hadmin
| prob p left right ihL ihR =>
  have <hnaL, hnaR> := hadmin
  have hscopedL :=
    wellScoped_term_child (child := left) hc hscoped
    (fun z hz => by simp [free, hz])
  have hscopedR :=
    wellScoped_term_child (child := right) hc hscoped
    (fun z hz => by simp [free, hz])
  refine prob_related_presentedChannelConfigCompleteness
    D_0 j_0 realize hc hrel ?_ ?_
  * intro semanticEnv k quantum henv hstack
    exact ihL hnaL
    (s := {s with control := .term left, quantum := quantum})
    rfl hs <hscopedL.left, hscopedL.right>
    <interp (hardwarePrimitive D_0 j_0 realize) left semanticEnv, k,
      ControlRel.term left s.env semanticEnv henv, hstack, rfl>
  * intro semanticEnv k quantum henv hstack
    exact ihR hnaR
    (s := {s with control := .term right, quantum := quantum})
    rfl hs <hscopedR.left, hscopedR.right>
    <interp (hardwarePrimitive D_0 j_0 realize) right semanticEnv, k,
      ControlRel.term right s.env semanticEnv henv, hstack, rfl>
| prim prim =>
  cases prim with
| ret value =>
  have hsRet :
    {s with control := .term (.prim (.ret value))} = s :=
    ChannelConfig.ext hc.symm rfl rfl rfl
  have hrelRet : ChannelConfigRel D_0 j_0 realize
    {s with control := .term (.prim (.ret value))} answer :=
    hsRet.symm |> hrel
  have hrelVal :=
    channel_config_return D_0 j_0 hrelRet

```

```

have hstepRet : ChannelInternalStep s
  {s with control := .value (.payload value)} := by
  have happ :
    ChannelInternalStep
      {s with control := .term (.prim (.ret value))}
      {s with control := .value (.payload value)} :=
    ChannelInternalStep.returnPrimitive (s := s)
      (value := value)
  exact hsRet.symm |> happ
have hscopedVal : ChannelConfig.WellScoped
  {s with control := .value (.payload value)} :=
  ChannelInternalStep.preserve_wellScoped hstepRet hscoped

```

Lean 4 source (lines 6401–6414)

```

have hval :=
  hVal (s := {s with control := .value (.payload value)})
    (arg := .payload value) rfl hs hscopedVal hrelVal
exact return_presentedChannelConfigCompleteness D_0 j_0 realize
  hc hrel hval
| pauliX value =>
  exact pauliX_under_closure_of_value D_0 j_0 realize hVal
  hc hs hscoped hrel
| measureZ _ _ =>
  exact False.elim hadmin

end HardwareChannelSemantics
end QLambda

```

A.27 QLambda/HardwareChannelSemantics.lean

51 lines.

Lean 4 source

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/
import QLambda.HardwareChannel.Config
import QLambda.HardwareChannel.Identity
import QLambda.HardwareChannel.Spines
import QLambda.HardwareChannel.UnderFrame
import QLambda.HardwareChannel.FunApp
import QLambda.HardwareChannel.Closed
import QLambda.HardwareChannel.Fundamental
import QLambda.HardwareChannel.Productive
import QLambda.HardwareChannel.Coverage

/-!
# Proof-only channel semantics for the hardware CEK machine

`HardwareOperational.Config` remains the executable machine with normalized
states and positive-only measurement transitions. This module supplies the
state-independent proof semantics needed by the TT channel model. Its states
are subnormalized, so every physical branch exists, including a zero branch.
No normalization or positivity test is performed in this layer.

## Organization

The development is layered under `QLambda/HardwareChannel/`:

```

```

* `Config` -- configurations, trees, relations, base completeness
* `Identity` -- unique-successor identity-step transfers
* `Spines` -- `NoApp` / `AdminNoApp` / `FunAppFrag` / `Produces` and stack spines
* `UnderFrame` -- under-frame lemmas and closed special cases
  (empty-stack admin completeness lives here with the proofs that use it)
* `FunApp` -- fragment inductions under residual frames
* `Closed` -- closed `Produces` / `FunAppFrag` theorems and token adequacy
* `Fundamental` -- path-indexed fundamental theorem and closed-term
  completeness under branch-complete evaluation derivations
* `Productive` -- automatic `PathChannelEvaluation` for `Productive 0`
  closed applications, plus `RestrictedExternApplication` /
  `ProductiveClosedCase` and direct presented completeness for the
  restricted ordinary / recursive lambda applications with an `extern`
  argument
* `Coverage` -- `ClosedStuckFreeCoverage` and the final
  `closed_stuck_free_presented_channelTreeCompleteness` /
  `closed_stuck_free_presented_token_adequacy` capstones

```

All layers contribute to the shared namespace
`QLambda.HardwareChannelSemantics`. The coverage predicate is the exact
proved sufficient boundary; the barrel does not assert completeness for
every closed term.
-/

A.28 QLambda/HardwareCompletenessCounterexample.lean

99 lines.

Lean 4 source

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/
import QLambda.HardwareAdequacy

/-!
# Counterexample to state-independent hardware tree completeness

The operational machine suppresses measurement outcomes having zero Born
weight on its concrete state. Such an outcome need not be the zero quantum
channel. Consequently the old positive-only `EvaluationTree` cannot provide
state-independent channel completeness. The sound repair is implemented in
`HardwareChannelSemantics`: the executable machine stays normalized, while a
proof-only subnormalized semantics executes both branches.
-/

open Matrix
open scoped MatrixOrder ComplexOrder

namespace QLambda
namespace HardwareCompletenessCounterexample

open HardwareOperational
open HardwareObservation
open TTPhysicalPrimitives

/-- The normalized computational basis state  $|0\rangle\langle 0|$ . -/
def ketZeroDensity : NormalizedDensity 2 where
  mat := Qubit.proj0

```

```

posSemidef := by
  have h :=
    KrausFamily.applyMat_posSemidef ([Qubit.proj0] : KrausFamily 2 2)
      (Matrix.PosSemidef.one :
        (1 : Matrix (Fin 2) (Fin 2) ?).PosSemidef)
  rw [KrausFamily.applyMat_single, Matrix.mul_one,
    Qubit.proj0_conjTranspose, Qubit.proj0_mul_self] at h
  exact h
trace_eq_one := by
  simp [Matrix.trace, Qubit.proj0]

/-- On  $|0\rangle$ , the `true` measurement outcome has zero Born weight. -/
theorem measure_true_ketZero_eq_zero {C : Type}
  (s : Config C) (hs : s.quantum = ketZeroDensity) :
  measureProbability s true = 0 := by
  rw [measureProbability, hs]
  simp [NormalizedDensity.bornWeight, measureBranch,
    Qubit.measureZComp, ketZeroDensity, KrausFamily.applyMat_single,
    Qubit.proj1_conjTranspose, Matrix.trace, Qubit.proj0, Qubit.proj1,
    Matrix.mul_apply]

/-- On  $|0\rangle$ , the `false` measurement outcome has unit Born weight. -/
theorem measure_false_ketZero_eq_one {C : Type}
  (s : Config C) (hs : s.quantum = ketZeroDensity) :
  measureProbability s false = 1 := by
  rw [← measureProbability_false_add_true s,
    measure_true_ketZero_eq_zero s hs]
  ring

/-- The omitted `true` projector is not the zero channel, even after the
identity prefix. -/
theorem true_measurement_identity_not_zero :
  not KrausFamily.SemEq
    (KrausFamily.comp (measureBranch true) (KrausFamily.identity 2))
    KrausFamily.zero := by
  intro h
  have hz := h Qubit.proj1
  rw [KrausFamily.applyMat_comp, KrausFamily.applyMat_identity,
    KrausFamily.applyMat_zero] at hz
  change
    KrausFamily.applyMat ([Qubit.proj1] : KrausFamily 2 2) Qubit.proj1 = 0
  at hz
  rw [KrausFamily.applyMat_single, Qubit.proj1_conjTranspose,
    Qubit.proj1_mul_self, Qubit.proj1_mul_self] at hz
  have h11 := congrFun (congrFun hz (1 : Fin 2)) (1 : Fin 2)
  simp [Qubit.proj1] at h11

/-- Concrete counterexample to replacing a state-specific zero Born branch by
a globally zero channel. This is precisely the extra implication required by
the one-child measurement constructors in `EvaluationTree`.

Consequently, completeness against state-independent TT channel observations
cannot use the old positive-only trees for all normalized initial states.
`HardwareChannelSemantics.ChannelTree` repairs exactly this mismatch by
executing every branch over subnormalized, possibly-zero states. -/
theorem zero_Born_weight_does_not_imply_zero_channel :
  exists (C : Type) (s : Config C) (b : Bool),
    measureProbability s b = 0 /\
    not KrausFamily.SemEq
      (KrausFamily.comp (measureBranch b) (KrausFamily.identity 2))
      KrausFamily.zero := by
  let s : Config Unit :=
    initialConfig (.prim (.ret ())) ketZeroDensity

```

```

    refine <Unit, s, true, ?_, true_measurement_identity_not_zero>
    exact measure_true_ketZero_eq_zero s rfl

end HardwareCompletenessCounterexample
end QLambda

```

A.29 QLambda/HardwareLogicalRelation.lean

1527 lines.

Lean 4 source (lines 1–400)

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/
import QLambda.HardwareObservation
import QLambda.Adequacy

/-!
# A logical relation for the hardware CEK machine

This file relates the classical part of the hardware machine to the recursive
value domain of the two-dimensional external-continuation model. The
relation is parameterized by a realization of hardware payloads. Concrete
density matrices are deliberately not erased into the denotational value
domain: their effects are represented by the physical primitive
interpretation.

No general token-adequacy claim is made here.
-/

namespace QLambda
namespace HardwareLogicalRelation

open Scott1972.ContinuousLattice
open HardwareOperational
open TTPhysicalPrimitives
open TTContinuation

abbrev QubitQ := TTEnternalContinuationPower 2

variable (D_0 : QDomain.{0})
variable (j_0 : IsContinuousLatticeProjection D_0.carrier
  (QuantumFunctor (QModel QubitQ) D_0.carrier))

abbrev HSemanticValue :=
  SemanticValue QubitQ D_0 j_0

abbrev HSemanticComp :=
  SemanticComp QubitQ D_0 j_0

/-- A runtime value is well scoped when every value stored in a captured
environment is recursively well scoped and every free name of a closure is
bound by that environment. The binders of `lam` and `recLam` are already
removed by `free`. -/
inductive RuntimeValue.WellScoped {C : Type} : RuntimeValue C -> Prop where
| payload (c : C) :
  WellScoped (.payload c)
| closure (x : Name) (body : Term (QubitPrimitive C))
  (runtimeEnv : RuntimeEnv C)
  (henv : forall y v, RuntimeEnv.lookup y runtimeEnv = some v ->

```

```

    WellScoped v)
  (hfree : forall y, y in free (.lam x body) ->
    exists v, RuntimeEnv.lookup y runtimeEnv = some v) :
  WellScoped (.closure x body runtimeEnv)
| recClosure (self arg : Name) (body : Term (QubitPrimitive C))
  (runtimeEnv : RuntimeEnv C)
  (henv : forall y v, RuntimeEnv.lookup y runtimeEnv = some v ->
    WellScoped v)
  (hfree : forall y, y in free (.recLam self arg body) ->
    exists v, RuntimeEnv.lookup y runtimeEnv = some v) :
  WellScoped (.recClosure self arg body runtimeEnv)

/-- Every value reachable through a finite runtime environment is well
scoped. -/
def RuntimeEnv.WellScoped {C : Type} (runtimeEnv : RuntimeEnv C) : Prop :=
  forall x v, RuntimeEnv.lookup x runtimeEnv = some v ->
    RuntimeValue.WellScoped v

theorem RuntimeEnv.wellScoped_nil {C : Type} :
  RuntimeEnv.WellScoped ([]) : RuntimeEnv C := by
  intro x v h
  simp [RuntimeEnv.lookup] at h

theorem RuntimeEnv.WellScoped.bind {C : Type}
  {runtimeEnv : RuntimeEnv C} {x : Name} {value : RuntimeValue C}
  (henv : RuntimeEnv.WellScoped runtimeEnv)
  (hvalue : RuntimeValue.WellScoped value) :
  RuntimeEnv.WellScoped (RuntimeEnv.bind x value runtimeEnv) := by
  intro y v hlookup
  by_cases hyx : y = x
  * subst y
    simp [RuntimeEnv.bind, RuntimeEnv.lookup] at hlookup
    cases hlookup
    exact hvalue
  * simp [RuntimeEnv.bind, RuntimeEnv.lookup, hyx] at hlookup
    exact henv y v hlookup

/-- A runtime environment binds every free name needed by a term. -/
def RuntimeEnv.Covers {C : Type} (runtimeEnv : RuntimeEnv C)
  (code : Term (QubitPrimitive C)) : Prop :=
  forall x, x in free code -> exists value, RuntimeEnv.lookup x runtimeEnv = some value

/-- Well-scoped CEK control. The current environment is retained in the
value case because it may subsequently be restored from an argument frame. -/
def Control.WellScoped {C : Type} (runtimeEnv : RuntimeEnv C) :
  Control C -> Prop
| .term code =>
  RuntimeEnv.WellScoped runtimeEnv /\ RuntimeEnv.Covers runtimeEnv code
| .value value =>
  RuntimeEnv.WellScoped runtimeEnv /\ RuntimeValue.WellScoped value

/-- Well-scoped CEK frames carry their own lexical scope. -/
def Frame.WellScoped {C : Type} : Frame C -> Prop
| .argument arg runtimeEnv =>
  RuntimeEnv.WellScoped runtimeEnv /\ RuntimeEnv.Covers runtimeEnv arg
| .function fn => RuntimeValue.WellScoped fn

/-- Every pending CEK frame is well scoped. -/
def EvalStack.WellScoped {C : Type} (stack : EvalStack C) : Prop :=
  forall frame, frame in stack -> Frame.WellScoped frame

/-- The closed-program invariant for executable CEK configurations. -/
def Config.WellScoped {C : Type} (s : Config C) : Prop :=

```



```

Control.WellScoped s.env s.control /\ EvalStack.WellScoped s.stack

theorem initialConfig_wellScoped {C : Type}
  {code : Term (QubitPrimitive C)} (hclosed : Closed code)
  (quantum : NormalizedDensity 2) :
  Config.WellScoped (initialConfig code quantum) := by
  refine <<RuntimeEnv.wellScoped_nil, ?_>, ?_>
  * intro x hx
  exact False.elim ((closed_iff_forall_not_mem.mp hclosed x) hx)
  * intro frame hframe
  simp [initialConfig] at hframe

/-- Administrative CEK transitions preserve the closed-program scoping
invariant, including closure creation and both beta rules. -/
theorem HardwareOperational.InternalStep.preserve_wellScoped {C : Type}
  {s t : Config C} (hstep : HardwareOperational.InternalStep s t)
  (hscoped : Config.WellScoped s) :
  Config.WellScoped t := by
  cases hstep with
  | @?variable? base x value hlookup =>
    rcases hscoped with <<henv, _>, hstack>
    exact <<henv, henv x value hlookup>, hstack>
  | @lambda base x body =>
    rcases hscoped with <<henv, hcover>, hstack>
    exact <<henv, .closure x body base.env henv hcover>, hstack>
  | @recursive base self arg body =>
    rcases hscoped with <<henv, hcover>, hstack>
    exact <<henv, .recClosure self arg body base.env henv hcover>, hstack>
  | @application base fn arg =>
    rcases hscoped with <<henv, hcover>, hstack>
    refine <<henv, ?_>, ?_>
    * intro x hx
    exact hcover x (by simp [free, hx])
    * intro frame hframe
    simp only [List.mem_cons] at hframe
    rcases hframe with rfl | hframe
    * refine <henv, ?_>
    intro x hx
    exact hcover x (by simp [free, hx])
    * exact hstack frame hframe
  | @evaluateArgument base fn arg callEnv rest =>
    rcases hscoped with <<_henv, hfn>, hstack>
    have hargFrame :
      Frame.WellScoped (.argument arg callEnv) :=
      hstack _ (by simp)
    rcases hargFrame with <hcallEnv, harg>
    refine <<hcallEnv, harg>, ?_>
    intro frame hframe
    simp only [List.mem_cons] at hframe
    rcases hframe with rfl | hframe
    * exact hfn
    * exact hstack frame (by simp [hframe])
  | @beta base x body closureEnv arg rest =>
    rcases hscoped with <<_henv, harg>, hstack>
    have hclosureFrame :=
      hstack (.function (.closure x body closureEnv)) (by simp)
    change RuntimeValue.WellScoped (.closure x body closureEnv) at hclosureFrame
    have hclosure := hclosureFrame
    cases hclosure with
    | closure _ _ _ hclosureEnv hfree =>
      have hclosureEnv' : RuntimeEnv.WellScoped closureEnv :=
        hclosureEnv
      refine <<RuntimeEnv.WellScoped.bind hclosureEnv' harg, ?_>, ?_>

```

```

* intro y hy
by_cases hyx : y = x
* subst y
exact <arg, by simp [RuntimeEnv.bind, RuntimeEnv.lookup]>
* obtain <value, hvalue> :=
  hfree y (by simp [free, hy, hyx])
exact <value, by
  simp [RuntimeEnv.bind, RuntimeEnv.lookup, hyx, hvalue]>
* intro frame hframe
exact hstack frame (by simp [hframe])
| @recBeta base self x body closureEnv arg rest =>
rcases hscoped with <<_henv, harg>, hstack>
have hrecFrame :=
  hstack (.function (.recClosure self x body closureEnv)) (by simp)
change RuntimeValue.WellScoped
  (.recClosure self x body closureEnv) at hrecFrame
have hrec := hrecFrame
cases hrec with
| recClosure _ _ _ _ hclosureEnv hfree =>
  have hclosureEnv' : RuntimeEnv.WellScoped closureEnv :=
    hclosureEnv
  have hself :
    RuntimeEnv.WellScoped
      (RuntimeEnv.bind self
        (.recClosure self x body closureEnv) closureEnv) :=
    RuntimeEnv.WellScoped.bind hclosureEnv'
      (.recClosure self x body closureEnv hclosureEnv hfree)
  refine <<RuntimeEnv.WellScoped.bind hself harg, ?_>, ?_>
* intro y hy
by_cases hyx : y = x
* subst y
exact <arg, by simp [RuntimeEnv.bind, RuntimeEnv.lookup]>
* by_cases hyself : y = self
* subst y
exact <.recClosure self x body closureEnv, by
  simp [RuntimeEnv.bind, RuntimeEnv.lookup, hyx]>
* obtain <value, hvalue> :=
  hfree y (by simp [free, hy, hyself, hyx])
exact <value, by
  simp [RuntimeEnv.bind, RuntimeEnv.lookup, hyx, hyself,
    hvalue]>
* intro frame hframe
exact hstack frame (by simp [hframe])
| @returnPrimitive base value =>
rcases hscoped with <<henv, _>, hstack>
exact <<henv, .payload value>, hstack>
| @pauliXPrimitive base value =>
rcases hscoped with <<henv, _>, hstack>
exact <<henv, .payload value>, hstack>
| @internalLeft base left right =>
rcases hscoped with <<henv, hcover>, hstack>
exact <<henv, fun x hx => hcover x (by simp [free, hx])>, hstack>
| @internalRight base left right =>
rcases hscoped with <<henv, hcover>, hstack>
exact <<henv, fun x hx => hcover x (by simp [free, hx])>, hstack>

theorem HardwareOperational.WeightedStep.preserve_wellScoped {C : Type}
  {s t : Config C} {weight : ?}
  (hstep : HardwareOperational.WeightedStep s weight t)
  (hscoped : Config.WellScoped s) :
  Config.WellScoped t := by
cases hstep with
| @probabilityLeft base p left right hp hp1 =>

```

```

    rcases hscoped with <<henv, hcover>, hstack>
    exact <<henv, fun x hx => hcover x (by simp [free, hx])>, hstack>
| @probabilityRight base p left right hp hp1 =>
    rcases hscoped with <<henv, hcover>, hstack>
    exact <<henv, fun x hx => hcover x (by simp [free, hx])>, hstack>
| @measurement base zeroValue oneValue b h =>
    rcases hscoped with <<henv, _>, hstack>
    exact <<henv, .payload _>, hstack>

theorem HardwareOperational.ExternalStep.preserve_wellScoped {C : Type}
  {s t : Config C} {selector : Bool}
  (hstep : HardwareOperational.ExternalStep s selector t)
  (hscoped : Config.WellScoped s) :
  Config.WellScoped t := by
cases hstep with
| @selectFalse base left right =>
    rcases hscoped with <<henv, hcover>, hstack>
    exact <<henv, fun x hx => hcover x (by simp [free, hx])>, hstack>
| @selectTrue base left right =>
    rcases hscoped with <<henv, hcover>, hstack>
    exact <<henv, fun x hx => hcover x (by simp [free, hx])>, hstack>

/-- Map every classical payload in a hardware primitive through its chosen
realization. -/
def realizePrimitive {C : Type} (realize : C -> HSemanticValue D_0 j_0) :
  QubitPrimitive C -> SemanticQubitPrimitive D_0 j_0
| .ret c => .ret (realize c)
| .pauliX c => .pauliX (realize c)
| .measureZ c_0 c_1 => .measureZ (realize c_0) (realize c_1)

/-- The primitive interpretation used for hardware syntax. -/
noncomputable def hardwarePrimitive {C : Type}
  (realize : C -> HSemanticValue D_0 j_0) :
  QubitPrimitive C -> HSemanticComp D_0 j_0 :=
fun p => semanticPrimitive D_0 j_0 (realizePrimitive D_0 j_0 realize p)

@[simp] theorem hardwarePrimitive_ret {C : Type}
  (realize : C -> HSemanticValue D_0 j_0) (c : C) :
  hardwarePrimitive D_0 j_0 realize (.ret c) =
  taggedUnit (n := 2) (realize c) := by
simp [hardwarePrimitive, realizePrimitive, semanticPrimitive]

@[simp] theorem hardwarePrimitive_pauliX {C : Type}
  (realize : C -> HSemanticValue D_0 j_0) (c : C) :
  hardwarePrimitive D_0 j_0 realize (.pauliX c) =
  TTPhysicalEmbedding.taggedEmbed
  (FiniteInstrumentComp.ofOperation Qubit.pauliXOp (realize c)) := by
rfl

@[simp] theorem hardwarePrimitive_measureZ {C : Type}
  (realize : C -> HSemanticValue D_0 j_0) (c_0 c_1 : C) :
  hardwarePrimitive D_0 j_0 realize (.measureZ c_0 c_1) =
  TTPhysicalEmbedding.taggedEmbed
  (Qubit.measureZComp.map
    (fun b => if b then realize c_1 else realize c_0)) := by
rfl

/-- A runtime value is related to the exact semantic value represented by
its payload or lexical closure. Closure environments need only agree at
names which the finite runtime environment actually binds. -/
inductive ValueRel {C : Type} (realize : C -> HSemanticValue D_0 j_0) :
  RuntimeValue C -> HSemanticValue D_0 j_0 -> Prop where
| payload (c : C) :

```

```

      ValueRel realize (.payload c) (realize c)
| closure (x : Name) (body : Term (QubitPrimitive C))
  (runtimeEnv : RuntimeEnv C)
  (semanticEnv : Env (HSemanticValue D_0 j_0))
  (henv : forall y v, RuntimeEnv.lookup y runtimeEnv = some v ->
    ValueRel realize v (semanticEnv y)) :
  ValueRel realize (.closure x body runtimeEnv)
    (lambdaValue (Q := QubitQ) (D_0 := D_0) (j_0 := j_0) x
      (interp (hardwarePrimitive D_0 j_0 realize) body) semanticEnv)
| recClosure (self arg : Name) (body : Term (QubitPrimitive C))
  (runtimeEnv : RuntimeEnv C)
  (semanticEnv : Env (HSemanticValue D_0 j_0))
  (henv : forall y v, RuntimeEnv.lookup y runtimeEnv = some v ->
    ValueRel realize v (semanticEnv y)) :
  ValueRel realize (.recClosure self arg body runtimeEnv)
    (recLambdaValue (Q := QubitQ) (D_0 := D_0) (j_0 := j_0) self arg
      (interp (hardwarePrimitive D_0 j_0 realize) body) semanticEnv)

/-- Agreement of a finite runtime environment with a total semantic one. -/
def EnvRel {C : Type} (realize : C -> HSemanticValue D_0 j_0)
  (runtimeEnv : RuntimeEnv C)
  (semanticEnv : Env (HSemanticValue D_0 j_0)) : Prop :=
  forall x v, RuntimeEnv.lookup x runtimeEnv = some v ->
    ValueRel D_0 j_0 realize v (semanticEnv x)

theorem env_lookup {C : Type} {realize : C -> HSemanticValue D_0 j_0}
  {runtimeEnv : RuntimeEnv C} {semanticEnv : Env (HSemanticValue D_0 j_0)}
  (henv : EnvRel D_0 j_0 realize runtimeEnv semanticEnv)
  {x : Name} {v : RuntimeValue C}
  (hlookup : RuntimeEnv.lookup x runtimeEnv = some v) :
  ValueRel D_0 j_0 realize v (semanticEnv x) :=
  henv x v hlookup

theorem env_nil {C : Type} (realize : C -> HSemanticValue D_0 j_0)
  (semanticEnv : Env (HSemanticValue D_0 j_0)) :
  EnvRel D_0 j_0 realize [] semanticEnv := by
  intro x v h
  simp [RuntimeEnv.lookup] at h

theorem env_bind {C : Type} {realize : C -> HSemanticValue D_0 j_0}
  {runtimeEnv : RuntimeEnv C} {semanticEnv : Env (HSemanticValue D_0 j_0)}
  {x : Name} {v : RuntimeValue C} {d : HSemanticValue D_0 j_0}
  (henv : EnvRel D_0 j_0 realize runtimeEnv semanticEnv)
  (hv : ValueRel D_0 j_0 realize v d) :
  EnvRel D_0 j_0 realize (RuntimeEnv.bind x v runtimeEnv)
    (envUpdate (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
      x (semanticEnv, d)) := by
  intro y w hw
  by_cases hyx : y = x
  * subst y
    simp [RuntimeEnv.bind, RuntimeEnv.lookup] at hw
    cases hw
    simp using hv
  * simp [RuntimeEnv.bind, RuntimeEnv.lookup, hyx] at hw
    rw [envUpdate_other hyx]
    exact henv y w hw

/-- On well-scoped runtime values, the semantic value represented by
`ValueRel` is unique. For closures, recursive well-scoping makes the two
semantic environments agree at every captured free name; the remaining
coordinates are irrelevant by `valueInterp_congr_free`, whose proof uses
`interp_congr_free`. -/
theorem valueRel_functional {C : Type}

```

```

(realize : C -> HSemanticValue D_0 j_0) :
forall {value : RuntimeValue C},
  RuntimeValue.WellScoped value ->
  forall {d_1 d_2 : HSemanticValue D_0 j_0},
    ValueRel D_0 j_0 realize value d_1 ->
    ValueRel D_0 j_0 realize value d_2 ->
    d_1 = d_2 := by
intro value hscoped
induction hscoped with
| payload c =>
  intro d_1 d_2 h_1 h_2
  cases h_1
  cases h_2
  rfl
| closure x body runtimeEnv henv hfree ih =>
  intro d_1 d_2 h_1 h_2
  cases h_1 with
  | closure _ _ _ semanticEnv_1 hrel_1 =>
    cases h_2 with
    | closure _ _ _ semanticEnv_2 hrel_2 =>
      exact valueInterp_congr_free
        (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
        (hardwarePrimitive D_0 j_0 realize)
        (.lam x body) semanticEnv_1 semanticEnv_2 (by
          intro y hy
          obtain <v, hv> := hfree y hy
          exact ih y v hv
          (hrel_1 y v hv) (hrel_2 y v hv))
  | recClosure self arg body runtimeEnv henv hfree ih =>
    intro d_1 d_2 h_1 h_2
    cases h_1 with
    | recClosure _ _ _ _ semanticEnv_1 hrel_1 =>
      cases h_2 with
      | recClosure _ _ _ _ semanticEnv_2 hrel_2 =>

```

Lean 4 source (lines 401–800)

```

      exact valueInterp_congr_free
        (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
        (hardwarePrimitive D_0 j_0 realize)
        (.recLam self arg body) semanticEnv_1 semanticEnv_2 (by
          intro y hy
          obtain <v, hv> := hfree y hy
          exact ih y v hv
          (hrel_1 y v hv) (hrel_2 y v hv))

theorem payload_related {C : Type}
  (realize : C -> HSemanticValue D_0 j_0) (c : C) :
  ValueRel D_0 j_0 realize (.payload c) (realize c) :=
  .payload c

theorem closure_created {C : Type}
  (realize : C -> HSemanticValue D_0 j_0)
  (x : Name) (body : Term (QubitPrimitive C))
  (runtimeEnv : RuntimeEnv C)
  (semanticEnv : Env (HSemanticValue D_0 j_0))
  (henv : EnvRel D_0 j_0 realize runtimeEnv semanticEnv) :
  ValueRel D_0 j_0 realize (.closure x body runtimeEnv
    (lambdaValue (Q := QubitQ) (D_0 := D_0) (j_0 := j_0) x
      (interp (hardwarePrimitive D_0 j_0 realize) body) semanticEnv) :=
  .closure x body runtimeEnv semanticEnv henv

theorem recClosure_created {C : Type}
  (realize : C -> HSemanticValue D_0 j_0)

```

```

    (self arg : Name) (body : Term (QubitPrimitive C))
    (runtimeEnv : RuntimeEnv C)
    (semanticEnv : Env (HSemanticValue D_0 j_0))
    (henv : EnvRel D_0 j_0 realize runtimeEnv semanticEnv) :
    ValueRel D_0 j_0 realize (.recClosure self arg body runtimeEnv)
      (recLambdaValue (Q := QubitQ) (D_0 := D_0) (j_0 := j_0) self arg
        (interp (hardwarePrimitive D_0 j_0 realize) body) semanticEnv) :=
    .recClosure self arg body runtimeEnv semanticEnv henv

theorem closure_beta_env {C : Type}
  {realize : C -> HSemanticValue D_0 j_0}
  {x : Name}
  {runtimeEnv : RuntimeEnv C}
  {semanticEnv : Env (HSemanticValue D_0 j_0)}
  {arg : RuntimeValue C} {d : HSemanticValue D_0 j_0}
  (henv : EnvRel D_0 j_0 realize runtimeEnv semanticEnv)
  (harg : ValueRel D_0 j_0 realize arg d) :
  EnvRel D_0 j_0 realize (RuntimeEnv.bind x arg runtimeEnv)
    (envUpdate (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
      x (semanticEnv, d)) := by
  exact env_bind D_0 j_0 henv harg

theorem recClosure_unfold_env {C : Type}
  {realize : C -> HSemanticValue D_0 j_0}
  {self arg : Name} {body : Term (QubitPrimitive C)}
  {runtimeEnv : RuntimeEnv C}
  {semanticEnv : Env (HSemanticValue D_0 j_0)}
  {value : RuntimeValue C} {d : HSemanticValue D_0 j_0}
  (henv : EnvRel D_0 j_0 realize runtimeEnv semanticEnv)
  (hvalue : ValueRel D_0 j_0 realize value d) :
  EnvRel D_0 j_0 realize
    (RuntimeEnv.bind arg value
      (runtimeEnv.bind self (.recClosure self arg body runtimeEnv)
        runtimeEnv))
    (envUpdate (Q := QubitQ) (D_0 := D_0) (j_0 := j_0) arg
      (envUpdate (Q := QubitQ) (D_0 := D_0) (j_0 := j_0) self
        (semanticEnv,
          recLambdaValue (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
            self arg (interp (hardwarePrimitive D_0 j_0 realize) body)
              semanticEnv),
        d)) := by
  exact env_bind D_0 j_0
    (env_bind D_0 j_0 henv
      (ValueRel.recClosure self arg body runtimeEnv semanticEnv henv))
  hvalue

/-- A stack relation presents a hardware stack as an exact semantic
continuation on computations. -/
inductive StackRel {C : Type} (realize : C -> HSemanticValue D_0 j_0) :
  EvalStack C -> (HSemanticComp D_0 j_0 -> HSemanticComp D_0 j_0) -> Prop where
| nil :
  StackRel realize [] id
| argument (arg : Term (QubitPrimitive C))
  (runtimeEnv : RuntimeEnv C)
  (semanticEnv : Env (HSemanticValue D_0 j_0))
  (rest : EvalStack C)
  (k : HSemanticComp D_0 j_0 -> HSemanticComp D_0 j_0)
  (henv : EnvRel D_0 j_0 realize runtimeEnv semanticEnv)
  (hrest : StackRel realize rest k) :
  StackRel realize (.argument arg runtimeEnv :: rest)
    (fun mf => k
      (semanticBind (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
        (applyContinuation (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)

```

```

      (interp (hardwarePrimitive D_0 j_0 realize) arg) semanticEnv)
    mf))
| function (fn : RuntimeValue C) (f : HSemanticValue D_0 j_0)
  (rest : EvalStack C)
  (k : HSemanticComp D_0 j_0 -> HSemanticComp D_0 j_0)
  (hfn : ValueRel D_0 j_0 realize fn f)
  (hrest : StackRel realize rest k) :
  StackRel realize (.function fn :: rest)
    (fun ma => k
      (semanticBind (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
        (semanticUnfold (Q := QubitQ) (D_0 := D_0) (j_0 := j_0) f) ma))

/-- A CEK frame paired with the tagged-tree coordinate at which it was
installed. Coordinates are ghost proof data and do not alter execution. -/
abbrev ObservedFrame (C : Type) := Frame C x Nat

abbrev ObservedStack (C : Type) := List (ObservedFrame C)

namespace ObservedStack

def erase {C : Type} (stack : ObservedStack C) : EvalStack C :=
  stack.map Prod.fst

@[simp]
theorem erase_nil {C : Type} :
  erase ([] : ObservedStack C) = [] :=
  rfl

@[simp]
theorem erase_cons {C : Type} (frame : Frame C) (coordinate : Nat)
  (rest : ObservedStack C) :
  erase ((frame, coordinate) :: rest) = frame :: erase rest :=
  rfl

end ObservedStack

/-- Coordinate-indexed stack relation. Each pending frame retains its
parent coordinate, while the active control may descend through external
branches independently. -/
inductive PathStackRel {C : Type}
  (realize : C -> HSemanticValue D_0 j_0)
  (finalK : ScottMap (HSemanticValue D_0 j_0) (TTResult 2)) :
  ObservedStack C ->
  ScottMap (HSemanticValue D_0 j_0) (TTResult 2) -> Prop where
| nil :
  PathStackRel realize finalK [] finalK
| argument
  (arg : Term (QubitPrimitive C))
  (runtimeEnv : RuntimeEnv C)
  (semanticEnv : Env (HSemanticValue D_0 j_0))
  (coordinate : Nat)
  (rest : ObservedStack C)
  (restK : ScottMap (HSemanticValue D_0 j_0) (TTResult 2))
  (henv : EnvRel D_0 j_0 realize runtimeEnv semanticEnv)
  (hrest : PathStackRel realize finalK rest restK) :
  PathStackRel realize finalK
    ((.argument arg runtimeEnv, coordinate) :: rest)
    (TTContinuation.continuation
      ((TTContinuation.atCoordinate coordinate).comp
        (applyContinuation (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
          (interp (hardwarePrimitive D_0 j_0 realize) arg) semanticEnv))
      restK)
| function

```

```

(fn : RuntimeValue C)
(f : HSemanticValue D_0 j_0)
(coordinate : Nat)
(rest : ObservedStack C)
(restK : ScottMap (HSemanticValue D_0 j_0) (TTResult 2))
(hfn : ValueRel D_0 j_0 realize fn f)
(hrest : PathStackRel realize finalK rest restK) :
PathStackRel realize finalK
  ((.function fn, coordinate) :: rest)
  (TTContinuation.continuation
    ((TTContinuation.atCoordinate coordinate).comp
      (semanticUnfold (Q := QubitQ) (D_0 := D_0) (j_0 := j_0) f))
    restK)

theorem stack_nil {C : Type}
  (realize : C -> HSemanticValue D_0 j_0) :
  StackRel D_0 j_0 realize [] id :=
  .nil

theorem stack_push_argument {C : Type}
  {realize : C -> HSemanticValue D_0 j_0}
  {arg : Term (QubitPrimitive C)} {runtimeEnv : RuntimeEnv C}
  {semanticEnv : Env (HSemanticValue D_0 j_0)}
  {rest : EvalStack C}
  {k : HSemanticComp D_0 j_0 -> HSemanticComp D_0 j_0}
  (henv : EnvRel D_0 j_0 realize runtimeEnv semanticEnv)
  (hrest : StackRel D_0 j_0 realize rest k) :
  StackRel D_0 j_0 realize (.argument arg runtimeEnv :: rest)
    (fun mf => k
      (semanticBind (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
        (applyContinuation (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
          (interp (hardwarePrimitive D_0 j_0 realize) arg) semanticEnv)
        mf)) :=
  .argument arg runtimeEnv semanticEnv rest k henv hrest

theorem stack_argument_to_function {C : Type}
  {realize : C -> HSemanticValue D_0 j_0}
  {fn : RuntimeValue C} {f : HSemanticValue D_0 j_0}
  {rest : EvalStack C}
  {k : HSemanticComp D_0 j_0 -> HSemanticComp D_0 j_0}
  (hfn : ValueRel D_0 j_0 realize fn f)
  (hrest : StackRel D_0 j_0 realize rest k) :
  StackRel D_0 j_0 realize (.function fn :: rest)
    (fun ma => k
      (semanticBind (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
        (semanticUnfold (Q := QubitQ) (D_0 := D_0) (j_0 := j_0) f) ma)) :=
  .function fn f rest k hfn hrest

/-- Relation for CEK control. A term is interpreted in a related
environment; a returned runtime value is lifted by semantic unit. -/
inductive ControlRel {C : Type} (realize : C -> HSemanticValue D_0 j_0) :
  Control C -> RuntimeEnv C -> HSemanticComp D_0 j_0 -> Prop where
| term (code : Term (QubitPrimitive C))
  (runtimeEnv : RuntimeEnv C)
  (semanticEnv : Env (HSemanticValue D_0 j_0))
  (henv : EnvRel D_0 j_0 realize runtimeEnv semanticEnv) :
  ControlRel realize (.term code) runtimeEnv
    (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv)
| value (result : RuntimeValue C) (d : HSemanticValue D_0 j_0)
  (runtimeEnv : RuntimeEnv C)
  (hvalue : ValueRel D_0 j_0 realize result d) :
  ControlRel realize (.value result) runtimeEnv
    (semanticUnit (Q := QubitQ) (D_0 := D_0) (j_0 := j_0) d)

```



```

/-- The classical CEK components denote a computation after applying their
related stack continuation. The concrete quantum field is intentionally
left to the physical primitive semantics. -/
def ConfigRel {C : Type} (realize : C -> HSemanticValue D_0 j_0)
  (s : Config C) (answer : HSemanticComp D_0 j_0) : Prop :=
  exists current k,
    ControlRel D_0 j_0 realize s.control s.env current /\
    StackRel D_0 j_0 realize s.stack k /\
    answer = k current

/-- A closed program in an empty CEK environment represents its compositional
interpreter denotation, independently of the concrete initial density. -/
theorem initialConfig_related {C : Type}
  (realize : C -> HSemanticValue D_0 j_0)
  (code : Term (QubitPrimitive C))
  (quantum : NormalizedDensity 2)
  (semanticEnv : Env (HSemanticValue D_0 j_0)) :
  ConfigRel D_0 j_0 realize (initialConfig code quantum)
  (interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv) := by
  refine <interp (hardwarePrimitive D_0 j_0 realize) code semanticEnv,
    id, ?_, StackRel.nil, rfl>
  exact ControlRel.term code [] semanticEnv (env_nil D_0 j_0 realize semanticEnv)

/-- At a terminal configuration the logical relation has no residual stack:
the represented computation is exactly the tagged return of a value related
to the runtime result. This is the leaf invariant used by tree soundness. -/
theorem terminal_config_related {C : Type}
  {realize : C -> HSemanticValue D_0 j_0}
  {s : Config C} (hterminal : HardwareObservation.Terminal s)
  {answer : HSemanticComp D_0 j_0}
  (hrel : ConfigRel D_0 j_0 realize s answer) :
  exists d : HSemanticValue D_0 j_0,
    ValueRel D_0 j_0 realize hterminal.value d /\
    answer =
      semanticUnit (Q := QubitQ) (D_0 := D_0) (j_0 := j_0) d := by
  rcases hrel with <current, k, hcontrol, hstack, rfl>
  have hcontrolEq : s.control = .value hterminal.value :=
    hterminal.control_eq
  have hstackEq : s.stack = [] := hterminal.stack_eq
  rw [hcontrolEq] at hcontrol
  rw [hstackEq] at hstack
  cases hcontrol with
  | value _ d _ hvalue =>
    cases hstack
    exact <d, hvalue, rfl>

theorem control_returnPrimitive {C : Type}
  (realize : C -> HSemanticValue D_0 j_0) (c : C)
  (runtimeEnv : RuntimeEnv C)
  (semanticEnv : Env (HSemanticValue D_0 j_0))
  (henv : EnvRel D_0 j_0 realize runtimeEnv semanticEnv) :
  ControlRel D_0 j_0 realize (.term (.prim (.ret c))) runtimeEnv
  (taggedUnit (n := 2) (realize c)) := by
  rw [← hardwarePrimitive_ret D_0 j_0 realize c]
  exact .term _ runtimeEnv semanticEnv henv

theorem control_pauliXPrimitive {C : Type}
  (realize : C -> HSemanticValue D_0 j_0) (c : C)
  (runtimeEnv : RuntimeEnv C)
  (semanticEnv : Env (HSemanticValue D_0 j_0))
  (henv : EnvRel D_0 j_0 realize runtimeEnv semanticEnv) :
  ControlRel D_0 j_0 realize (.term (.prim (.pauliX c))) runtimeEnv

```

```

      (TTPhysicalEmbedding.taggedEmbed
        (FiniteInstrumentComp.ofOperation Qubit.pauliXOp (realize c))) := by
rw [ <- hardwarePrimitive_pauliX D_0 j_0 realize c]
exact .term _ runtimeEnv semanticEnv henv

theorem control_measureZPrimitive {C : Type}
  (realize : C -> HSemanticValue D_0 j_0) (c_0 c_1 : C)
  (runtimeEnv : RuntimeEnv C)
  (semanticEnv : Env (HSemanticValue D_0 j_0))
  (henv : EnvRel D_0 j_0 realize runtimeEnv semanticEnv) :
  ControlRel D_0 j_0 realize (.term (.prim (.measureZ c_0 c_1))) runtimeEnv
    (TTPhysicalEmbedding.taggedEmbed
      (Qubit.measureZComp.map
        (fun b => if b then realize c_1 else realize c_0))) := by
rw [ <- hardwarePrimitive_measureZ D_0 j_0 realize c_0 c_1]
exact .term _ runtimeEnv semanticEnv henv

theorem control_application {C : Type}
  (realize : C -> HSemanticValue D_0 j_0)
  (fn arg : Term (QubitPrimitive C))
  (runtimeEnv : RuntimeEnv C)
  (semanticEnv : Env (HSemanticValue D_0 j_0))
  (henv : EnvRel D_0 j_0 realize runtimeEnv semanticEnv) :
  ControlRel D_0 j_0 realize (.term (.app fn arg)) runtimeEnv
    (applyComp (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
      (interp (hardwarePrimitive D_0 j_0 realize) fn)
      (interp (hardwarePrimitive D_0 j_0 realize) arg) semanticEnv) :=
.term _ runtimeEnv semanticEnv henv

/-- Denotational compatibility of closure application with the environment
installed by the hardware `beta` transition. -/
theorem closure_application {C : Type}
  {realize : C -> HSemanticValue D_0 j_0}
  (x : Name) (body : Term (QubitPrimitive C))
  (runtimeEnv : RuntimeEnv C)
  (semanticEnv : Env (HSemanticValue D_0 j_0))
  (arg : RuntimeValue C) (d : HSemanticValue D_0 j_0)
  (_henv : EnvRel D_0 j_0 realize runtimeEnv semanticEnv)
  (_harg : ValueRel D_0 j_0 realize arg d) :
  applyComp (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
    ((semanticUnit (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)).comp
      (lambdaValue (Q := QubitQ) (D_0 := D_0) (j_0 := j_0) x
        (interp (hardwarePrimitive D_0 j_0 realize) body)))
    ((semanticUnit (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)).comp
      (ScottMap.const d))
    semanticEnv =
  interp (hardwarePrimitive D_0 j_0 realize) body
    (envUpdate (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
      x (semanticEnv, d)) := by
exact applyComp_pure_lambda
  (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
  x (interp (hardwarePrimitive D_0 j_0 realize) body)
  (ScottMap.const d) semanticEnv

/-- Denotational compatibility of recursive closure application with the
self-then-argument environment installed by `recBeta`. -/
theorem recClosure_application {C : Type}
  {realize : C -> HSemanticValue D_0 j_0}
  (self arg : Name) (body : Term (QubitPrimitive C))
  (runtimeEnv : RuntimeEnv C)
  (semanticEnv : Env (HSemanticValue D_0 j_0))
  (value : RuntimeValue C) (d : HSemanticValue D_0 j_0)
  (_henv : EnvRel D_0 j_0 realize runtimeEnv semanticEnv)

```

```

(_hvalue : ValueRel D_0 j_0 realize value d) :
applyComp (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
  ((semanticUnit (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)).comp
    (recLambdaValue (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
      self arg (interp (hardwarePrimitive D_0 j_0 realize) body)))
  ((semanticUnit (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)).comp
    (ScottMap.const d))
semanticEnv =
interp (hardwarePrimitive D_0 j_0 realize) body
  (envUpdate (Q := QubitQ) (D_0 := D_0) (j_0 := j_0) arg
    (envUpdate (Q := QubitQ) (D_0 := D_0) (j_0 := j_0) self
      (semanticEnv,
        recLambdaValue (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
          self arg (interp (hardwarePrimitive D_0 j_0 realize) body)
            semanticEnv),
        d)) := by
exact applyComp_pure_recLambda
  (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
  self arg (interp (hardwarePrimitive D_0 j_0 realize) body)
  (ScottMap.const d) semanticEnv

/-- Pushing an argument frame is exactly the decomposition of compositional
application under any already-related remainder continuation. -/
theorem application_under_stack {C : Type}
  (realize : C -> HSemanticValue D_0 j_0)
  (fn arg : Term (QubitPrimitive C))
  (semanticEnv : Env (HSemanticValue D_0 j_0))
  (k : HSemanticComp D_0 j_0 -> HSemanticComp D_0 j_0) :
k (interp (hardwarePrimitive D_0 j_0 realize) (.app fn arg) semanticEnv) =
  k (semanticBind (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
    (applyContinuation (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
      (interp (hardwarePrimitive D_0 j_0 realize) arg) semanticEnv)
    (interp (hardwarePrimitive D_0 j_0 realize) fn semanticEnv)) :=
rfl

/-- Once the function control has returned a related value, the hardware
`evaluateArgument` frame change is justified by the monad left-unit law. -/
theorem evaluateArgument_under_stack {C : Type}
  {realize : C -> HSemanticValue D_0 j_0}
  (arg : Term (QubitPrimitive C))
  (semanticEnv : Env (HSemanticValue D_0 j_0))
  (f : HSemanticValue D_0 j_0)
  (k : HSemanticComp D_0 j_0 -> HSemanticComp D_0 j_0) :
k (semanticBind (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
  (applyContinuation (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
    (interp (hardwarePrimitive D_0 j_0 realize) arg) semanticEnv)
    (semanticUnit (Q := QubitQ) (D_0 := D_0) (j_0 := j_0) f)) =
  k (semanticBind (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
    (semanticUnfold (Q := QubitQ) (D_0 := D_0) (j_0 := j_0) f)
    (interp (hardwarePrimitive D_0 j_0 realize) arg semanticEnv)) := by
apply congrArg k
have h := congrArg
  (fun g : ScottMap (HSemanticValue D_0 j_0) (HSemanticComp D_0 j_0) => g f)
  (IsQuantumMonad.unit_bind (Q := QubitQ)
    (applyContinuation (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
      (interp (hardwarePrimitive D_0 j_0 realize) arg) semanticEnv))
rw [ScottMap.comp_apply] at h
simp using h

```

Lean 4 source (lines 801–1200)

```

/-! ## Choice-transition compatibility -/

```

```

/-- Either hardware scheduler step from an internal choice refines the
denotation of the unresolved choice. -/
theorem internal_left_le {C : Type}
  (realize : C -> HSemanticValue D_0 j_0)
  (left right : Term (QubitPrimitive C))
  (semanticEnv : Env (HSemanticValue D_0 j_0)) :
  interp (hardwarePrimitive D_0 j_0 realize) left semanticEnv <=
    interp (hardwarePrimitive D_0 j_0 realize)
      (.intern left right) semanticEnv :=
  interp_le_intern_left
  (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
  (hardwarePrimitive D_0 j_0 realize) left right semanticEnv

theorem internal_right_le {C : Type}
  (realize : C -> HSemanticValue D_0 j_0)
  (left right : Term (QubitPrimitive C))
  (semanticEnv : Env (HSemanticValue D_0 j_0)) :
  interp (hardwarePrimitive D_0 j_0 realize) right semanticEnv <=
    interp (hardwarePrimitive D_0 j_0 realize)
      (.intern left right) semanticEnv :=
  interp_le_intern_right
  (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
  (hardwarePrimitive D_0 j_0 realize) left right semanticEnv

/-- A source-probability hardware branch retains its declared physical
weight in the concrete TT weighted-branch relation. -/
theorem probability_left_weighted {C : Type}
  (realize : C -> HSemanticValue D_0 j_0)
  (p : Prob) (left right : Term (QubitPrimitive C))
  (hp_0 : 0 <= p) (hp_1 : p <= 1)
  (semanticEnv : Env (HSemanticValue D_0 j_0)) :
  HasWeightedBranchSemantics.weightedBranch
    (interp (hardwarePrimitive D_0 j_0 realize)
      (.prob p left right) semanticEnv)
    p
    (interp (hardwarePrimitive D_0 j_0 realize) left semanticEnv) :=
  interp_prob_left_weighted
  (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
  (hardwarePrimitive D_0 j_0 realize) p left right hp_0 hp_1 semanticEnv

theorem probability_right_weighted {C : Type}
  (realize : C -> HSemanticValue D_0 j_0)
  (p : Prob) (left right : Term (QubitPrimitive C))
  (hp_0 : 0 <= p) (hp_1 : p <= 1)
  (semanticEnv : Env (HSemanticValue D_0 j_0)) :
  HasWeightedBranchSemantics.weightedBranch
    (interp (hardwarePrimitive D_0 j_0 realize)
      (.prob p left right) semanticEnv)
    (1 - p)
    (interp (hardwarePrimitive D_0 j_0 realize) right semanticEnv) :=
  interp_prob_right_weighted
  (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
  (hardwarePrimitive D_0 j_0 realize) p left right hp_0 hp_1 semanticEnv

/-- Resolving an external hardware branch is exactly Boolean selection in the
tagged TT model. -/
theorem external_select {C : Type}
  (realize : C -> HSemanticValue D_0 j_0)
  (selected : Bool) (left right : Term (QubitPrimitive C))
  (semanticEnv : Env (HSemanticValue D_0 j_0)) :
  HasExternalSelection.select selected
    (interp (hardwarePrimitive D_0 j_0 realize)
      (.extern left right) semanticEnv) =

```

```

      interp (hardwarePrimitive D_0 j_0 realize)
      (if selected then right else left) semanticEnv := by
cases selected
* exact interp_external_step_select
  (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
  (hardwarePrimitive D_0 j_0 realize)
  (ExternalStep.left left right) semanticEnv
* exact interp_external_step_select
  (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
  (hardwarePrimitive D_0 j_0 realize)
  (ExternalStep.right left right) semanticEnv

/-! ## Configuration-level one-step compatibility -/

/-- Runtime variable lookup preserves the exact computation represented by a
related configuration. -/
theorem config_variable {C : Type}
  {realize : C -> HSemanticValue D_0 j_0}
  {s : Config C} {x : Name} {v : RuntimeValue C}
  (hlookup : RuntimeEnv.lookup x s.env = some v)
  {answer : HSemanticComp D_0 j_0}
  (hrel : ConfigRel D_0 j_0 realize
    {s with control := .term (.var x)} answer) :
  ConfigRel D_0 j_0 realize
    {s with control := .value v} answer := by
rcases hrel with <current, k, hcontrol, hstack, rfl>
cases hcontrol with
| term _ _ semanticEnv henv =>
  refine <semanticUnit (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
    (semanticEnv x), k, ?_, hstack, ?_>
  * exact ControlRel.value v (semanticEnv x) s.env
    (env_lookup D_0 j_0 henv hlookup)
  * simp

/-- Lambda creation preserves the exact represented computation. -/
theorem config_lambda {C : Type}
  {realize : C -> HSemanticValue D_0 j_0}
  {s : Config C} {x : Name} {body : Term (QubitPrimitive C)}
  {answer : HSemanticComp D_0 j_0}
  (hrel : ConfigRel D_0 j_0 realize
    {s with control := .term (.lam x body)} answer) :
  ConfigRel D_0 j_0 realize
    {s with control := .value (.closure x body s.env)} answer := by
rcases hrel with <current, k, hcontrol, hstack, rfl>
cases hcontrol with
| term _ _ semanticEnv henv =>
  refine <semanticUnit (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
    (lambdaValue (Q := QubitQ) (D_0 := D_0) (j_0 := j_0) x
      (interp (hardwarePrimitive D_0 j_0 realize) body) semanticEnv),
    k, ?_, hstack, ?_>
  * exact ControlRel.value _ _ s.env
    (closure_created D_0 j_0 realize x body s.env semanticEnv henv)
  * simp

/-- Recursive-closure creation preserves the exact represented computation. -/
theorem config_recursive {C : Type}
  {realize : C -> HSemanticValue D_0 j_0}
  {s : Config C} {self arg : Name}
  {body : Term (QubitPrimitive C)}
  {answer : HSemanticComp D_0 j_0}
  (hrel : ConfigRel D_0 j_0 realize
    {s with control := .term (.recLam self arg body)} answer) :
  ConfigRel D_0 j_0 realize

```

```

    {s with control :=
      .value (.recClosure self arg body s.env)} answer := by
rcases hrel with <current, k, hcontrol, hstack, rfl>
cases hcontrol with
| term _ _ semanticEnv henv =>
  refine <semanticUnit (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
    (recLambdaValue (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
      self arg (interp (hardwarePrimitive D_0 j_0 realize) body)
      semanticEnv), k, ?_, hstack, ?_>
  * exact ControlRel.value _ _ s.env
    (recClosure_created D_0 j_0 realize self arg body
      s.env semanticEnv henv)
  * simp

/-- Pushing an application argument frame preserves the exact represented
computation. -/
theorem config_application {C : Type}
  {realize : C -> HSemanticValue D_0 j_0}
  {s : Config C} {fn arg : Term (QubitPrimitive C)}
  {answer : HSemanticComp D_0 j_0}
  (hrel : ConfigRel D_0 j_0 realize
    {s with control := .term (.app fn arg)} answer) :
  ConfigRel D_0 j_0 realize
    {s with control := .term fn,
      stack := .argument arg s.env :: s.stack} answer := by
rcases hrel with <current, k, hcontrol, hstack, rfl>
cases hcontrol with
| term _ _ semanticEnv henv =>
  refine <interp (hardwarePrimitive D_0 j_0 realize) fn semanticEnv,
    (fun mf => k
      (semanticBind (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
        (applyContinuation (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
          (interp (hardwarePrimitive D_0 j_0 realize) arg) semanticEnv
          mf)), ?_, ?_, ?_>
  * exact ControlRel.term fn s.env semanticEnv henv
  * exact stack_push_argument D_0 j_0 henv hstack
  * exact (application_under_stack D_0 j_0 realize
    fn arg semanticEnv k).symm

/-- Replacing an argument frame by a function frame preserves the exact
represented computation. -/
theorem config_evaluateArgument {C : Type}
  {realize : C -> HSemanticValue D_0 j_0}
  {s : Config C} {fn : RuntimeValue C}
  {arg : Term (QubitPrimitive C)} {callEnv : RuntimeEnv C}
  {rest : EvalStack C} {answer : HSemanticComp D_0 j_0}
  (hrel : ConfigRel D_0 j_0 realize
    {s with control := .value fn,
      stack := .argument arg callEnv :: rest} answer) :
  ConfigRel D_0 j_0 realize
    {s with control := .term arg,
      env := callEnv,
      stack := .function fn :: rest} answer := by
rcases hrel with <current, outer, hcontrol, hstack, rfl>
cases hcontrol with
| value _ f _ hfn =>
  cases hstack with
  | argument _ _ semanticEnv _ k henv hrest =>
    refine <interp (hardwarePrimitive D_0 j_0 realize) arg semanticEnv,
      (fun ma => k
        (semanticBind (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
          (semanticUnfold (Q := QubitQ) (D_0 := D_0) (j_0 := j_0) f)
          ma)), ?_, ?_, ?_>

```

```

    * exact ControlRel.term arg callEnv semanticEnv henv
    * exact stack_argument_to_function D_0 j_0 hfn hrest
    * exact (evaluateArgument_under_stack D_0 j_0
      arg semanticEnv f k).symm

/-- Closure b-reduction preserves the exact represented computation. -/
theorem config_beta {C : Type}
  {realize : C -> HSemanticValue D_0 j_0}
  {s : Config C} {x : Name} {body : Term (QubitPrimitive C)}
  {closureEnv : RuntimeEnv C} {arg : RuntimeValue C}
  {rest : EvalStack C} {answer : HSemanticComp D_0 j_0}
  (hrel : ConfigRel D_0 j_0 realize
    {s with control := .value arg,
      stack := .function (.closure x body closureEnv) :: rest}
    answer) :
  ConfigRel D_0 j_0 realize
    {s with control := .term body,
      env := RuntimeEnv.bind x arg closureEnv,
      stack := rest} answer := by
  rcases hrel with <current, outer, hcontrol, hstack, rfl>
  cases hcontrol with
  | value _ d _ harg =>
    cases hstack with
    | function _ f _ k hfn hrest =>
      cases hfn with
      | closure _ _ _ semanticEnv henv =>
        refine <interp (hardwarePrimitive D_0 j_0 realize) body
          (envUpdate (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
            x (semanticEnv, d)), k, ?_, hrest, ?_>
        * exact ControlRel.term body _ _
          (closure_beta_env D_0 j_0 henv harg)
        * exact congrArg k (closure_application D_0 j_0
          x body closureEnv semanticEnv arg d henv harg)

/-- Recursive-closure b-reduction preserves the exact represented
computation. -/
theorem config_recBeta {C : Type}
  {realize : C -> HSemanticValue D_0 j_0}
  {s : Config C} {self x : Name}
  {body : Term (QubitPrimitive C)} {closureEnv : RuntimeEnv C}
  {arg : RuntimeValue C} {rest : EvalStack C}
  {answer : HSemanticComp D_0 j_0}
  (hrel : ConfigRel D_0 j_0 realize
    {s with control := .value arg,
      stack :=
        .function (.recClosure self x body closureEnv) :: rest}
    answer) :
  ConfigRel D_0 j_0 realize
    {s with control := .term body,
      env :=
        RuntimeEnv.bind x arg
          (RuntimeEnv.bind self
            (.recClosure self x body closureEnv) closureEnv),
      stack := rest} answer := by
  rcases hrel with <current, outer, hcontrol, hstack, rfl>
  cases hcontrol with
  | value _ d _ harg =>
    cases hstack with
    | function _ f _ k hfn hrest =>
      cases hfn with
      | recClosure _ _ _ _ semanticEnv henv =>
        refine <interp (hardwarePrimitive D_0 j_0 realize) body
          (envUpdate (Q := QubitQ) (D_0 := D_0) (j_0 := j_0) x

```

```

      (envUpdate (Q := QubitQ) (D_0 := D_0) (j_0 := j_0) self
        (semanticEnv,
          recLambdaValue (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
            self x
              (interp (hardwarePrimitive D_0 j_0 realize) body)
                semanticEnv),
          d)), k, ?_, hrest, ?_>
    * exact ControlRel.term body _ _
      (recClosure_unfold_env D_0 j_0 henv harg)
    * exact congrArg k (recClosure_application D_0 j_0
      self x body closureEnv semanticEnv arg d henv harg)

/-- A classical return primitive preserves the exact represented computation;
unlike Pauli-X and measurement, it performs no physical operation. -/
theorem config_returnPrimitive {C : Type}
  {realize : C -> HSemanticValue D_0 j_0}
  {s : Config C} {value : C}
  {answer : HSemanticComp D_0 j_0}
  (hrel : ConfigRel D_0 j_0 realize
    {s with control := .term (.prim (.ret value))} answer) :
  ConfigRel D_0 j_0 realize
    {s with control := .value (.payload value)} answer := by
rcases hrel with <current, k, hcontrol, hstack, rfl>
cases hcontrol with
| term _ _ semanticEnv henv =>
  refine <semanticUnit (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
    (realize value), k, ?_, hstack, ?_>
  * exact ControlRel.value _ _ s.env (.payload value)
  * congr 1
  rw [interp_prim_apply, hardwarePrimitive_ret]
  change
    TTContinuation.taggedUnit (n := 2) (realize value) =
      TTContinuation.taggedUnit (n := 2) (realize value)
  rfl

/-- Every continuation represented by a hardware stack is monotone. -/
theorem stack_monotone {C : Type}
  {realize : C -> HSemanticValue D_0 j_0}
  {stack : EvalStack C}
  {k : HSemanticComp D_0 j_0 -> HSemanticComp D_0 j_0}
  (hstack : StackRel D_0 j_0 realize stack k) :
  Monotone k := by
induction hstack with
| nil => exact monotone_id
| argument arg runtimeEnv semanticEnv rest k henv hrest ih =>
  intro a b hab
  apply ih
  exact
    (semanticBind (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
      (applyContinuation (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
        (interp (hardwarePrimitive D_0 j_0 realize) arg) semanticEnv)).monotone
    hab
| function fn f rest k hfn hrest ih =>
  intro a b hab
  apply ih
  exact
    (semanticBind (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
      (semanticUnfold (Q := QubitQ) (D_0 := D_0) (j_0 := j_0) f)).monotone
    hab

/-- Every stack continuation is a composite of Kleisli extensions, so it
preserves TT internal choice exactly. -/
theorem stackRel_map_intern {C : Type}

```



```

{realize : C -> HSemanticValue D_0 j_0}
{stack : EvalStack C}
{k : HSemanticComp D_0 j_0 -> HSemanticComp D_0 j_0}
(hstack : StackRel D_0 j_0 realize stack k)
(q r : HSemanticComp D_0 j_0) :
k (HasComputationChoice.intern (q, r)) =
  HasComputationChoice.intern (k q, k r) := by
induction hstack generalizing q r with
| nil => rfl
| argument arg runtimeEnv semanticEnv rest k henv hrest ih =>
  change k
    (semanticBind (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
      (applyContinuation (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
        (interp (hardwarePrimitive D_0 j_0 realize) arg) semanticEnv)
      (HasComputationChoice.intern (q, r))) =
  HasComputationChoice.intern
    (k (semanticBind (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
      (applyContinuation (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
        (interp (hardwarePrimitive D_0 j_0 realize) arg) semanticEnv)
      q),
      k (semanticBind (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
        (applyContinuation (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
          (interp (hardwarePrimitive D_0 j_0 realize) arg) semanticEnv)
        r))
  rw [show
    semanticBind (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
      (applyContinuation (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
        (interp (hardwarePrimitive D_0 j_0 realize) arg)
        semanticEnv)
      (HasComputationChoice.intern (q, r)) =
    HasComputationChoice.intern
      (semanticBind (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
        (applyContinuation (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
          (interp (hardwarePrimitive D_0 j_0 realize) arg)
          semanticEnv)
        q,
        semanticBind (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
          (applyContinuation (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
            (interp (hardwarePrimitive D_0 j_0 realize) arg)
            semanticEnv)
          r) from
    TTContinuation.taggedBind_intern
      (applyContinuation (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
        (interp (hardwarePrimitive D_0 j_0 realize) arg) semanticEnv)
      q r]
  exact ih
    (semanticBind (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
      (applyContinuation (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
        (interp (hardwarePrimitive D_0 j_0 realize) arg) semanticEnv)
      q)
    (semanticBind (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
      (applyContinuation (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
        (interp (hardwarePrimitive D_0 j_0 realize) arg) semanticEnv)
      r)
| function fn f rest k hfn hrest ih =>
  change k
    (semanticBind (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
      (semanticUnfold (Q := QubitQ) (D_0 := D_0) (j_0 := j_0) f)
      (HasComputationChoice.intern (q, r))) =
  HasComputationChoice.intern
    (k (semanticBind (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
      (semanticUnfold (Q := QubitQ) (D_0 := D_0) (j_0 := j_0) f) q),
      k (semanticBind (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)

```

```

      (semanticUnfold (Q := QubitQ) (D_0 := D_0) (j_0 := j_0) f) r))
rw [show
  semanticBind (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
    (semanticUnfold (Q := QubitQ) (D_0 := D_0) (j_0 := j_0) f)
    (HasComputationChoice.intern (q, r)) =
  HasComputationChoice.intern
    (semanticBind (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
      (semanticUnfold (Q := QubitQ) (D_0 := D_0) (j_0 := j_0) f) q,
      semanticBind (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
        (semanticUnfold (Q := QubitQ) (D_0 := D_0) (j_0 := j_0) f) r) from
  TTContinuation.taggedBind_intern
    (semanticUnfold (Q := QubitQ) (D_0 := D_0) (j_0 := j_0) f) q r]
exact ih
  (semanticBind (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
    (semanticUnfold (Q := QubitQ) (D_0 := D_0) (j_0 := j_0) f) q)
  (semanticBind (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
    (semanticUnfold (Q := QubitQ) (D_0 := D_0) (j_0 := j_0) f) r)
theorem stackRel_map_prob {C : Type}

```

Lean 4 source (lines 1201–1527)

```

{realize : C -> HSemanticValue D_0 j_0}
{stack : EvalStack C}
{k : HSemanticComp D_0 j_0 -> HSemanticComp D_0 j_0}
(hstack : StackRel D_0 j_0 realize stack k)
(p : Prob) (q r : HSemanticComp D_0 j_0) :
k (HasComputationChoice.prob p (q, r)) =
  HasComputationChoice.prob p (k q, k r) := by
induction hstack generalizing q r with
| nil => rfl
| argument arg runtimeEnv semanticEnv rest k henv hrest ih =>
  change k
    (semanticBind (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
      (applyContinuation (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
        (interp (hardwarePrimitive D_0 j_0 realize) arg) semanticEnv)
      (HasComputationChoice.prob p (q, r))) =
  HasComputationChoice.prob p
    (k (semanticBind (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
      (applyContinuation (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
        (interp (hardwarePrimitive D_0 j_0 realize) arg) semanticEnv)
      q),
      k (semanticBind (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
        (applyContinuation (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
          (interp (hardwarePrimitive D_0 j_0 realize) arg) semanticEnv)
        r))
rw [show
  semanticBind (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
    (applyContinuation (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
      (interp (hardwarePrimitive D_0 j_0 realize) arg)
      semanticEnv)
    (HasComputationChoice.prob p (q, r)) =
  HasComputationChoice.prob p
    (semanticBind (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
      (applyContinuation (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
        (interp (hardwarePrimitive D_0 j_0 realize) arg)
        semanticEnv)
      q,
      semanticBind (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
        (applyContinuation (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
          (interp (hardwarePrimitive D_0 j_0 realize) arg)
          semanticEnv)
        r) from
  TTContinuation.taggedBind_prob

```

```

      (applyContinuation (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
        (interp (hardwarePrimitive D_0 j_0 realize) arg) semanticEnv)
    p q r]
exact ih
  (semanticBind (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
    (applyContinuation (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
      (interp (hardwarePrimitive D_0 j_0 realize) arg) semanticEnv)
    q)
  (semanticBind (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
    (applyContinuation (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
      (interp (hardwarePrimitive D_0 j_0 realize) arg) semanticEnv)
    r)
| function fn f rest k hfn hrest ih =>
  change k
    (semanticBind (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
      (semanticUnfold (Q := QubitQ) (D_0 := D_0) (j_0 := j_0) f)
      (HasComputationChoice.prob p (q, r))) =
  HasComputationChoice.prob p
    (k (semanticBind (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
      (semanticUnfold (Q := QubitQ) (D_0 := D_0) (j_0 := j_0) f) q),
      k (semanticBind (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
        (semanticUnfold (Q := QubitQ) (D_0 := D_0) (j_0 := j_0) f) r))
  rw [show
    semanticBind (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
      (semanticUnfold (Q := QubitQ) (D_0 := D_0) (j_0 := j_0) f)
      (HasComputationChoice.prob p (q, r)) =
    HasComputationChoice.prob p
      (semanticBind (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
        (semanticUnfold (Q := QubitQ) (D_0 := D_0) (j_0 := j_0) f) q,
        semanticBind (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
          (semanticUnfold (Q := QubitQ) (D_0 := D_0) (j_0 := j_0) f) r) from
    TTContinuation.taggedBind_prob
      (semanticUnfold (Q := QubitQ) (D_0 := D_0) (j_0 := j_0) f) p q r]
  exact ih
    (semanticBind (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
      (semanticUnfold (Q := QubitQ) (D_0 := D_0) (j_0 := j_0) f) q)
    (semanticBind (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
      (semanticUnfold (Q := QubitQ) (D_0 := D_0) (j_0 := j_0) f) r)

/-- Internal-left scheduling produces a related target whose denotation
refines that of the unresolved source, through every related stack. -/
theorem config_internalLeft {C : Type}
  {realize : C -> HSemanticValue D_0 j_0}
  {s : Config C} {left right : Term (QubitPrimitive C)}
  {answer : HSemanticComp D_0 j_0}
  (hrel : ConfigRel D_0 j_0 realize
    {s with control := .term (.intern left right)} answer) :
  exists targetAnswer,
    ConfigRel D_0 j_0 realize
      {s with control := .term left} targetAnswer /\
      targetAnswer <= answer := by
  rcases hrel with <current, k, hcontrol, hstack, rfl>
  cases hcontrol with
  | term _ _ semanticEnv henv =>
    refine <k (interp (hardwarePrimitive D_0 j_0 realize) left semanticEnv),
      ?_, ?_>
    * exact <_, k, ControlRel.term left s.env semanticEnv henv,
      hstack, rfl>
    * exact stack_monotone D_0 j_0 hstack
      (internal_left_le D_0 j_0 realize left right semanticEnv)

/-- Internal-right scheduling produces a related target whose denotation
refines that of the unresolved source, through every related stack. -/

```

```

theorem config_internalRight {C : Type}
  {realize : C -> HSemanticValue D_0 j_0}
  {s : Config C} {left right : Term (QubitPrimitive C)}
  {answer : HSemanticComp D_0 j_0}
  (hrel : ConfigRel D_0 j_0 realize
    {s with control := .term (.intern left right)} answer) :
  exists targetAnswer,
    ConfigRel D_0 j_0 realize
      {s with control := .term right} targetAnswer /\
      targetAnswer <= answer := by
rcases hrel with <current, k, hcontrol, hstack, rfl>
cases hcontrol with
| term _ _ semanticEnv henv =>
  refine <k (interp (hardwarePrimitive D_0 j_0 realize) right semanticEnv),
    ?_, ?_>
  * exact <_, k, ControlRel.term right s.env semanticEnv henv,
    hstack, rfl>
  * exact stack_monotone D_0 j_0 hstack
    (internal_right_le D_0 j_0 realize left right semanticEnv)

/-- The concrete tagged weighted-branch relation is closed under every
continuation generated by a related CEK stack. -/
theorem stack_weightedBranch {C : Type}
  {realize : C -> HSemanticValue D_0 j_0}
  {stack : EvalStack C}
  {k : HSemanticComp D_0 j_0 -> HSemanticComp D_0 j_0}
  (hstack : StackRel D_0 j_0 realize stack k)
  {source target : HSemanticComp D_0 j_0} {p : Prob}
  (hbranch : HasWeightedBranchSemantics.weightedBranch source p target) :
  HasWeightedBranchSemantics.weightedBranch (k source) p (k target) := by
induction hstack generalizing source target p with
| nil => simp using hbranch
| argument arg runtimeEnv semanticEnv rest k henv hrest ih =>
  exact ih
    (TTContinuation.TaggedWeightedBranch.bindLeft hbranch
      (applyContinuation (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
        (interp (hardwarePrimitive D_0 j_0 realize) arg) semanticEnv))
| function fn f rest k hfn hrest ih =>
  exact ih
    (TTContinuation.TaggedWeightedBranch.bindLeft hbranch
      (semanticUnfold (Q := QubitQ) (D_0 := D_0) (j_0 := j_0) f))

/-- A left source-probability transition retains its declared weight through
every related CEK stack. -/
theorem config_probabilityLeft {C : Type}
  {realize : C -> HSemanticValue D_0 j_0}
  {s : Config C} {p : Prob}
  {left right : Term (QubitPrimitive C)}
  (hp_0 : 0 <= p) (hp_1 : p <= 1)
  {answer : HSemanticComp D_0 j_0}
  (hrel : ConfigRel D_0 j_0 realize
    {s with control := .term (.prob p left right)} answer) :
  exists targetAnswer,
    ConfigRel D_0 j_0 realize
      {s with control := .term left} targetAnswer /\
      HasWeightedBranchSemantics.weightedBranch answer p targetAnswer := by
rcases hrel with <current, k, hcontrol, hstack, rfl>
cases hcontrol with
| term _ _ semanticEnv henv =>
  refine <k (interp (hardwarePrimitive D_0 j_0 realize) left semanticEnv),
    ?_, ?_>
  * exact <_, k, ControlRel.term left s.env semanticEnv henv,
    hstack, rfl>

```

```

    * exact stack_weightedBranch D_0 j_0 hstack
      (probability_left_weighted D_0 j_0 realize p left right
       hp_0 hp_1 semanticEnv)

/-- A right source-probability transition retains weight `1-p` through every
related CEK stack. -/
theorem config_probabilityRight {C : Type}
  {realize : C -> HSemanticValue D_0 j_0}
  {s : Config C} {p : Prob}
  {left right : Term (QubitPrimitive C)}
  (hp_0 : 0 <= p) (hp_1 : p <= 1)
  {answer : HSemanticComp D_0 j_0}
  (hrel : ConfigRel D_0 j_0 realize
    {s with control := .term (.prob p left right)} answer) :
  exists targetAnswer,
    ConfigRel D_0 j_0 realize
      {s with control := .term right} targetAnswer /\
      HasWeightedBranchSemantics.weightedBranch answer (1 - p)
    targetAnswer := by
rcases hrel with <current, k, hcontrol, hstack, rfl>
cases hcontrol with
| term _ _ semanticEnv henv =>
  refine <k (interp (hardwarePrimitive D_0 j_0 realize) right semanticEnv),
    ?_, ?_>
  * exact <_, k, ControlRel.term right s.env semanticEnv henv,
    hstack, rfl>
  * exact stack_weightedBranch D_0 j_0 hstack
    (probability_right_weighted D_0 j_0 realize p left right
     hp_0 hp_1 semanticEnv)

/-- A selector may be transported through a related stack exactly when the
model's selector commutes with that stack continuation. This hypothesis is
explicit because top-level external-selection laws do not imply sequencing
closure. -/
theorem config_externalSelect {C : Type}
  {realize : C -> HSemanticValue D_0 j_0}
  {s : Config C} {selected : Bool}
  {left right : Term (QubitPrimitive C)}
  (hcommute :
    forall current k,
      StackRel D_0 j_0 realize s.stack k ->
      HasExternalSelection.select selected (k current) =
        k (HasExternalSelection.select selected current))
  {answer : HSemanticComp D_0 j_0}
  (hrel : ConfigRel D_0 j_0 realize
    {s with control := .term (.extern left right)} answer) :
  ConfigRel D_0 j_0 realize
    {s with control := .term (if selected then right else left)}
    (HasExternalSelection.select selected answer) := by
rcases hrel with <current, k, hcontrol, hstack, rfl>
cases hcontrol with
| term _ _ semanticEnv henv =>
  refine <interp (hardwarePrimitive D_0 j_0 realize)
    (if selected then right else left) semanticEnv, k, ?_, hstack, ?_>
  * exact ControlRel.term _ s.env semanticEnv henv
  * rw [hcommute _ k hstack,
    external_select D_0 j_0 realize selected left right semanticEnv]

/-- External selection is unconditionally exact at an empty stack. -/
theorem config_externalSelect_nil {C : Type}
  {realize : C -> HSemanticValue D_0 j_0}
  {s : Config C} (hstack : s.stack = [])
  {selected : Bool} {left right : Term (QubitPrimitive C)}

```

```

{answer : HSemanticComp D_0 j_0}
(hrel : ConfigRel D_0 j_0 realize
  {s with control := .term (.extern left right)} answer) :
ConfigRel D_0 j_0 realize
  {s with control := .term (if selected then right else left)}
  (HasExternalSelection.select selected answer) := by
apply config_externalSelect D_0 j_0 (s := s)
intro current k hk
rw [hstack] at hk
cases hk
rfl
exact hrel

/-! ## Operation-aware primitive transitions -/

/-- Pauli-X relates the source to the embedded physical operation and the
target to the pure payload return; these computations are deliberately not
equated. The final conjunct records the exact concrete state update. -/
theorem config_pauliXPrimitive_operation {C : Type}
{realize : C -> HSemanticValue D_0 j_0}
{s : Config C} {value : C}
{answer : HSemanticComp D_0 j_0}
(hrel : ConfigRel D_0 j_0 realize
  {s with control := .term (.prim (.pauliX value))} answer) :
exists (targetAnswer : HSemanticComp D_0 j_0)
(k : HSemanticComp D_0 j_0 -> HSemanticComp D_0 j_0),
ConfigRel D_0 j_0 realize
  {s with control := .value (.payload value),
    quantum := NormalizedDensity.pauliX s.quantum}
  targetAnswer /\
  answer =
    k (TTPhysicalEmbedding.taggedEmbed
      (FiniteInstrumentComp.ofOperation Qubit.pauliXOp
        (realize value))) /\
  targetAnswer =
    k (semanticUnit (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
      (realize value)) /\
  KrausFamily.applyMat Qubit.pauliXOp.kraus s.quantum.mat =
    (NormalizedDensity.pauliX s.quantum).mat := by
rcases hrel with <current, k, hcontrol, hstack, rfl>
cases hcontrol with
| term _ _ semanticEnv henv =>
  refine <k (semanticUnit (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
    (realize value)), k, ?_, ?_, rfl, rfl>
  * exact <_, k,
    ControlRel.value _ _ s.env (.payload value), hstack, rfl>
  * simp only [interp_prim_apply, hardwarePrimitive_pauliX]

/-- A nonzero measurement branch keeps the source as the complete embedded
measurement instrument, relates the selected target payload separately, and
records the exact unnormalized Born branch of the concrete density matrix. -/
theorem config_measureZPrimitive_operation {C : Type}
{realize : C -> HSemanticValue D_0 j_0}
{s : Config C} {zeroValue oneValue : C} {b : Bool}
(hpositive : 0 < measureProbability s b)
{answer : HSemanticComp D_0 j_0}
(hrel : ConfigRel D_0 j_0 realize
  ({ control := .term (.prim (.measureZ zeroValue oneValue)),
    env := s.env, stack := s.stack, quantum := s.quantum } : Config C)
  answer) :
exists (targetAnswer : HSemanticComp D_0 j_0)
(k : HSemanticComp D_0 j_0 -> HSemanticComp D_0 j_0),
ConfigRel D_0 j_0 realize

```

```

    ({ control :=
      .value (.payload (if b then oneValue else zeroValue)),
      env := s.env, stack := s.stack,
      quantum := measuredState s b hpositive } : Config C)
    targetAnswer /\
  answer =
    k (TTPhysicalEmbedding.taggedEmbed
      (Qubit.measureZComp.map
        (fun outcome =>
          if outcome then realize oneValue else realize zeroValue))) /\
    targetAnswer =
      k (semanticUnit (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
        (realize (if b then oneValue else zeroValue))) /\
    KrausFamily.applyMat (measureBranch b) s.quantum.mat =
      (measureProbability s b : ?) *
      (measuredState s b hpositive).mat := by
rcases hrel with <current, k, hcontrol, hstack, rfl>
cases hcontrol with
| term _ _ semanticEnv henv =>
  refine <k (semanticUnit (Q := QubitQ) (D_0 := D_0) (j_0 := j_0)
    (realize (if b then oneValue else zeroValue))), k, ?_, ?_,
    rfl, ?_>
  * exact <_, k,
    ControlRel.value _ _ s.env
    (.payload (if b then oneValue else zeroValue)),
    hstack, rfl>
  * simp only [interp_prim_apply, hardwarePrimitive_measureZ]
  * simp [HardwareObservation.QuantumAction.kraus] using
    (HardwareObservation.QuantumAction.apply_measurement
      s b hpositive)

end HardwareLogicalRelation
end QLambda

```

A.30 QLambda/HardwareObservation.lean

602 lines.

Lean 4 source (lines 1–400)

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/
import QLambda.HardwareOperational

/-!
# Finite observations of the hardware machine

This module records finite executions of the hardware CEK machine. A trace
keeps probabilistic mass, the path of environment selectors, and a symbolic
Kraus history. The Kraus history is ghost data: executable configurations
continue to contain only a normalized density matrix.

No claim relating these observations to the TT denotation is made here.
-/

open Matrix
open scoped ComplexOrder MatrixOrder

namespace QLambda
namespace HardwareObservation

```

```

open HardwareOperational
open TTPhysicalPrimitives

/-- Symbolic quantum metadata for one machine transition. Administrative and
external steps denote the identity operation. A source probability is
represented physically by a square-root-scaled identity Kraus operator. -/
inductive QuantumAction where
  | identity
  | pauliX
  | measurement (outcome : Bool)
  | sourceProbability (weight : ?)

namespace QuantumAction

/-- Kraus family denoted by a symbolic transition action. -/
noncomputable def kraus : QuantumAction -> KrausFamily 2 2
  | .identity => KrausFamily.identity 2
  | .pauliX => Qubit.pauliXOp.kraus
  | .measurement b => HardwareOperational.measureBranch b
  | .sourceProbability p =>
    KrausFamily.scale (Real.sqrt p) (KrausFamily.identity 2)

/-- Compose a chronological symbolic history into one Kraus family. -/
noncomputable def composeHistory : List QuantumAction -> KrausFamily 2 2
  | [] => KrausFamily.identity 2
  | a :: as => KrausFamily.comp (composeHistory as) a.kraus

@[simp]
theorem composeHistory_nil :
  composeHistory [] = KrausFamily.identity 2 :=
  rfl

@[simp]
theorem composeHistory_cons (a : QuantumAction) (as : List QuantumAction) :
  composeHistory (a :: as) =
    KrausFamily.comp (composeHistory as) a.kraus :=
  rfl

/-- A source probability acts as scalar multiplication by its real weight. -/
theorem apply_sourceProbability (p : ?) (hp : 0 <= p)
  (? : Matrix (Fin 2) (Fin 2) ?) :
  KrausFamily.applyMat (kraus (.sourceProbability p)) ? =
    (p : ?) * ? := by
  rw [kraus, KrausFamily.applyMat_scale, KrausFamily.applyMat_identity]
  have hsqrt :
    (Real.sqrt p : ?) * star (Real.sqrt p : ?) = p := by
    simp only [Complex.star_def, Complex.conj_ofReal, <- Complex.ofReal_mul]
    norm_cast
    simp [pow_two] using Real.sq_sqrt hp
  rw [hsqrt]

/-- A measurement action is the corresponding unnormalized Born branch. -/
theorem apply_measurement {C : Type} (s : Config C) (b : Bool)
  (hp : 0 < measureProbability s b) :
  KrausFamily.applyMat (kraus (.measurement b)) s.quantum.mat =
    (measureProbability s b : ?) * (measuredState s b hp).mat := by
  rw [kraus]
  unfold measureProbability at hp
  unfold measuredState measureProbability
  rw [HardwareOperational.NormalizedDensity.normalizeBranch_mat]
  ext i j
  simp [Matrix.smul_apply, ne_of_gt hp]

```



```

end QuantumAction

/-- Symbolic action determined by the source of an internal step. This
definition inspects executable syntax rather than eliminating a proof into
data. -/
def internalAction {C : Type} (s : Config C) : QuantumAction :=
  match s.control with
  | .term (.prim (.pauliX _)) => .pauliX
  | _ => .identity

/-- One transition with all observational labels made explicit. Internal,
weighted, and environment-selected transitions remain distinct constructors. -/
inductive MachineStep {C : Type} :
  Config C -> ? -> List Bool -> QuantumAction -> Config C -> Prop where
| internal {s t : Config C} (h : HardwareOperational.InternalStep s t) :
  MachineStep s 1 [] (internalAction s) t
| probabilityLeft {s : Config C} {p : ?}
  {left right : Term (QubitPrimitive C)}
  (hp : 0 < p) (hp1 : p <= 1) :
  MachineStep
    {s with control := .term (.prob p left right)}
    p [] (.sourceProbability p)
    {s with control := .term left}
| probabilityRight {s : Config C} {p : ?}
  {left right : Term (QubitPrimitive C)}
  (hp : 0 <= p) (hp1 : p < 1) :
  MachineStep
    {s with control := .term (.prob p left right)}
    (1 - p) [] (.sourceProbability (1 - p))
    {s with control := .term right}
| measurement {s : Config C} {zeroValue oneValue : C} {b : Bool}
  (h : 0 < measureProbability s b) :
  MachineStep
    {s with control := .term (.prim (.measureZ zeroValue oneValue))}
    (measureProbability s b) [] (.measurement b)
    {s with
      control := .value (.payload (if b then oneValue else zeroValue))
      quantum := measuredState s b h}
| external {s t : Config C} {selector : Bool}
  (h : HardwareOperational.ExternalStep s selector t) :
  MachineStep s 1 [selector] .identity t

/-- Erasure of symbolic Kraus metadata back to exactly one of the three
operational step relations. -/
inductive UnderlyingStep {C : Type} :
  Config C -> ? -> List Bool -> Config C -> Prop where
| internal {s t : Config C} (h : HardwareOperational.InternalStep s t) :
  UnderlyingStep s 1 [] t
| weighted {s t : Config C} {p : ?}
  (h : HardwareOperational.WeightedStep s p t) :
  UnderlyingStep s p [] t
| external {s t : Config C} {selector : Bool}
  (h : HardwareOperational.ExternalStep s selector t) :
  UnderlyingStep s 1 [selector] t

namespace MachineStep

/-- Every labelled step is backed by one of the original operational
relations; the symbolic layer adds metadata but no transitions. -/
theorem underlying {C : Type} {s t : Config C} {p : ?}
  {selectors : List Bool} {action : QuantumAction}
  (h : MachineStep s p selectors action t) :

```

```

    UnderlyingStep s p selectors t := by
cases h with
| internal h => exact .internal h
| probabilityLeft hp hp1 =>
    exact .weighted (.probabilityLeft hp hp1)
| probabilityRight hp hp1 =>
    exact .weighted (.probabilityRight hp hp1)
| measurement hp =>
    exact .weighted (.measurement hp)
| external h => exact .external h

/-- Every original weighted transition admits its corresponding symbolic
label, so the labelled trace layer is complete for weighted steps. -/
theorem exists_of_weighted {C : Type} {s t : Config C} {p : ?}
  (h : HardwareOperational.WeightedStep s p t) :
  exists action, MachineStep s p [] action t := by
cases h with
| probabilityLeft hp hp1 =>
    exact <.sourceProbability _, .probabilityLeft hp hp1>
| probabilityRight hp hp1 =>
    exact <.sourceProbability _, .probabilityRight hp hp1>
| measurement hp =>
    exact <.measurement _, .measurement hp>

theorem weight_pos {C : Type} {s t : Config C} {p : ?}
  {selectors : List Bool} {action : QuantumAction}
  (h : MachineStep s p selectors action t) : 0 < p := by
cases h with
| internal => norm_num
| external => norm_num
| probabilityLeft hp _ => exact hp
| probabilityRight _ hp1 => linarith
| measurement hp => exact hp

/-- A symbolic one-step Kraus action produces the weighted, unnormalized
target state from the normalized source state. -/
theorem apply_kraus_eq_weight_smul {C : Type} {s t : Config C} {p : ?}
  {selectors : List Bool} {action : QuantumAction}
  (h : MachineStep s p selectors action t) :
  KrausFamily.applyMat action.kraus s.quantum.mat =
  (p : ?) * t.quantum.mat := by
cases h with
| internal h =>
    cases h <;>
    simp [internalAction, QuantumAction.kraus,
    HardwareOperational.NormalizedDensity.pauliX]
| external h =>
    cases h <;> simp [QuantumAction.kraus]
| probabilityLeft hp hp1 =>
    exact QuantumAction.apply_sourceProbability _ (le_of_lt hp) _
| probabilityRight hq hq1 =>
    exact QuantumAction.apply_sourceProbability _
    (sub_nonneg.mpr (le_of_lt hq1)) _
| measurement hp =>
    exact QuantumAction.apply_measurement _ _ hp

end MachineStep

/-- A finite execution trace. Histories and selector paths are chronological;
weights multiply along the trace. -/
inductive ExecutionTrace {C : Type} :
  Config C -> Config C -> ? -> List Bool -> List QuantumAction -> Nat -> Prop
where

```

```

| refl (s : Config C) :
  ExecutionTrace s s 1 [] [] 0
| cons {s u t : Config C} {p q : ?}
  {headSelectors tailSelectors : List Bool}
  {action : QuantumAction} {actions : List QuantumAction} {depth : Nat}
  (head : MachineStep s p headSelectors action u)
  (tail : ExecutionTrace u t q tailSelectors actions depth) :
  ExecutionTrace s t (p * q) (headSelectors ++ tailSelectors)
    (action :: actions) (depth + 1)

namespace ExecutionTrace

theorem weight_pos {C : Type} {s t : Config C} {p : ?}
  {selectors : List Bool} {actions : List QuantumAction} {depth : Nat}
  (h : ExecutionTrace s t p selectors actions depth) : 0 < p := by
  induction h with
  | refl => norm_num
  | cons head tail ih =>
    exact mul_pos head.weight_pos ih

/-- The composed symbolic Kraus history agrees with the concrete normalized
states after restoring the accumulated branch weight. -/
theorem apply_composeHistory_eq_weight_smul
  {C : Type} {s t : Config C} {p : ?}
  {selectors : List Bool} {actions : List QuantumAction} {depth : Nat}
  (h : ExecutionTrace s t p selectors actions depth) :
  KrausFamily.applyMat (QuantumAction.composeHistory actions) s.quantum.mat =
    (p : ?) * t.quantum.mat := by
  induction h with
  | refl =>
    simp
  | @cons s u t p q hs ts action actions depth head tail ih =>
    rw [QuantumAction.composeHistory_cons, KrausFamily.applyMat_comp,
      head.apply_kraus_eq_weight_smul, KrausFamily.applyMat_smul, ih]
    rw [smul_smul]
    norm_cast

end ExecutionTrace

/-- A terminal CEK configuration has returned a value with no pending frames. -/
structure Terminal {C : Type} (s : Config C) where
  value : RuntimeValue C
  control_eq : s.control = .value value
  stack_eq : s.stack = []

/-- A completed finite observation from `start`. It retains its terminal
configuration, positive accumulated mass, selector path, symbolic Kraus
history, and exact transition depth. -/
structure FiniteObservation {C : Type} (start : Config C) where
  terminal : Config C
  weight : ?
  selectors : List Bool
  actions : List QuantumAction
  depth : Nat
  trace : ExecutionTrace start terminal weight selectors actions depth
  isTerminal : Terminal terminal

namespace FiniteObservation

theorem weight_pos {C : Type} {start : Config C}
  (o : FiniteObservation start) : 0 < o.weight :=
  o.trace.weight_pos

```

```

/-- Intrinsic Kraus family represented by this finite history. -/
noncomputable def kraus {C : Type} {start : Config C}
  (o : FiniteObservation start) : KrausFamily 2 2 :=
  QuantumAction.composeHistory o.actions

theorem apply_kraus_eq_weight_smul {C : Type} {start : Config C}
  (o : FiniteObservation start) :
  KrausFamily.applyMat o.kraus start.quantum.mat =
    (o.weight : ?) * o.terminal.quantum.mat :=
  o.trace.apply_composeHistory_eq_weight_smul

end FiniteObservation

/-- A depth/fuel-bounded witness packages a completed observation together
with the fact that it fits within the available fuel. -/
structure FuelWitness {C : Type} (start : Config C) (fuel : Nat) where
  observation : FiniteObservation start
  depth_le : observation.depth <= fuel

namespace FuelWitness

/-- Increasing fuel preserves every existing observation witness. -/
def weaken {C : Type} {start : Config C} {fuel fuel' : Nat}
  (h : fuel <= fuel') (w : FuelWitness start fuel) :
  FuelWitness start fuel' :=
  <w.observation, w.depth_le.trans h>

end FuelWitness

/-- The set of completed observations visible at a given fuel. -/
def observationsAtFuel {C : Type} (start : Config C) (fuel : Nat) :
  Set (FiniteObservation start) :=
  {o | o.depth <= fuel}

theorem observationsAtFuel_mono {C : Type} {start : Config C}
  {fuel fuel' : Nat} (h : fuel <= fuel') :
  observationsAtFuel start fuel subseq observationsAtFuel start fuel' :=
  fun _ ho => ho.trans h

/-- A directed, exhaustive fuel presentation of operational observations.
This is the order-theoretic interface intended for later comparison with
finite TT tokens; it contains no denotational adequacy assertion. -/
structure DirectedOperationalObservation {C : Type} (start : Config C) where
  stage : Nat -> Set (FiniteObservation start)
  monotone : forall ?fuel fuel', fuel <= fuel' -> stage fuel subseq stage fuel'
  exhaustive : forall o, exists fuel, o in stage fuel

/-- Canonical directed observation object generated by trace depth. -/
def operationalObservation {C : Type} (start : Config C) :
  DirectedOperationalObservation start where
  stage := observationsAtFuel start
  monotone := fun _ _ h => observationsAtFuel_mono (start := start) h
  exhaustive := fun o => <o.depth, show o.depth <= o.depth from le_refl>

theorem operationalObservation_stage_directed {C : Type}
  (start : Config C) :
  Directed (* subseq *) (operationalObservation start).stage := by
  change Directed (* subseq *) (observationsAtFuel start)
  intro i j
  refine <max i j, ?_, ?_>
  * exact observationsAtFuel_mono (start := start) (le_max_left i j)
  * exact observationsAtFuel_mono (start := start) (le_max_right i j)

```

```

/-! ## Branch-complete finite evaluation trees -/

/-- An empty physical computation, used only for a branch whose source or
Born weight is zero. -/
def emptyInstrument (n : Nat) (D : Type) : FiniteInstrumentComp n D where
  Outcome := Empty
  branch := Empty.elim
  value := Empty.elim
  trace_nonincreasing := by
    intro ? h?
    simp only [Finset.univ_eq_empty, Finset.sum_empty]
    simp [Matrix.trace] using
      (Finset.sum_nonneg fun x (_ : x in Finset.univ) =>
        (Complex.nonneg_iff.mp h?.diag_nonneg).1)

/-- The two source-probability branches as one physical instrument. -/
noncomputable def probabilityInstrument (p : ?)
  (hp_0 : 0 <= p) (hp_1 : p <= 1) :
  FiniteInstrumentComp 2 Bool where
  Outcome := Bool
  branch := fun b =>
    QuantumAction.kraus (.sourceProbability (if b then 1 - p else p))
  value := id
  trace_nonincreasing := by
    intro ? h?
    rw [Fintype.sum_bool]
    simp only [Bool.false_eq_true, reduceIte]
    rw [QuantumAction.apply_sourceProbability (1 - p)
      (sub_nonneg.mpr hp_1) ?]
    rw [QuantumAction.apply_sourceProbability p hp_0 ?]
    rw [Matrix.trace_smul, Matrix.trace_smul]
    have htr : 0 <= (Matrix.trace ?).re := by
      change 0 <= ? x : Fin 2, (? x x).re
      exact Finset.sum_nonneg fun x _ =>
        (Complex.nonneg_iff.mp h?.diag_nonneg).1
    change
      (((1 - p : ?) : ?) * Matrix.trace ?).re +
        ((p : ?) * Matrix.trace ?).re <=
          (Matrix.trace ?).re
    rw [Complex.mul_re, Complex.mul_re]
    simp only [Complex.ofReal_re, Complex.ofReal_im, zero_mul, sub_zero]
    linarith

/-- One completed leaf, including the external selectors consumed on the
path to it. -/
structure TreeLeaf (C : Type) where
  terminal : Config C
  isTerminal : Terminal terminal
  selectors : List Bool

/-- A finite, scheduler-resolved evaluation tree. Internal choice chooses one
child. External choice chooses and records one selector. Probability and
measurement retain every nonzero physical branch together. Administrative
and deterministic quantum steps are unary. -/
inductive EvaluationTree (C : Type) :
  KrausFamily 2 2 -> Config C -> Type where
| terminal {? : KrausFamily 2 2} {s : Config C}
  (h : Terminal s) : EvaluationTree C ? s
| internal {? : KrausFamily 2 2} {s t : Config C}
  (h : HardwareOperational.InternalStep s t)
  (next : EvaluationTree C
    (KrausFamily.comp (internalAction s).kraus ?) t) :
  EvaluationTree C ? s

```

Lean 4 source (lines 401–602)

```

| external {? : KrausFamily 2 2} {s t : Config C} (selector : Bool)
  (h : HardwareOperational.ExternalStep s selector t)
  (next : EvaluationTree C ? t) : EvaluationTree C ? s
| probabilityInterior {? : KrausFamily 2 2}
  {s : Config C} {p : ?}
  {left right : Term (QubitPrimitive C)}
  (hp_0 : 0 < p) (hp_1 : p < 1)
  (leftTree : EvaluationTree C
    (KrausFamily.comp
      (QuantumAction.kraus (.sourceProbability p)) ?)
    {s with control := .term left})
  (rightTree : EvaluationTree C
    (KrausFamily.comp
      (QuantumAction.kraus (.sourceProbability (1 - p))) ?)
    {s with control := .term right}) :
  EvaluationTree C ?
  {s with control := .term (.prob p left right)}
| probabilityZero {? : KrausFamily 2 2} {s : Config C}
  {left right : Term (QubitPrimitive C)}
  (rightTree : EvaluationTree C
    (KrausFamily.comp
      (QuantumAction.kraus (.sourceProbability 1)) ?)
    {s with control := .term right}) :
  EvaluationTree C ?
  {s with control := .term (.prob 0 left right)}
| probabilityOne {? : KrausFamily 2 2} {s : Config C}
  {left right : Term (QubitPrimitive C)}
  (leftTree : EvaluationTree C
    (KrausFamily.comp
      (QuantumAction.kraus (.sourceProbability 1)) ?)
    {s with control := .term left}) :
  EvaluationTree C ?
  {s with control := .term (.prob 1 left right)}
| measurementBoth {? : KrausFamily 2 2}
  {s : Config C} {zeroValue oneValue : C}
  (h_0 : 0 < measureProbability s false)
  (h_1 : 0 < measureProbability s true)
  (zeroTree : EvaluationTree C
    (KrausFamily.comp (measureBranch false) ?)
    {s with control := .value (.payload zeroValue),
      quantum := measuredState s false h_0})
  (oneTree : EvaluationTree C
    (KrausFamily.comp (measureBranch true) ?)
    {s with control := .value (.payload oneValue),
      quantum := measuredState s true h_1}) :
  EvaluationTree C ?
  {s with control := .term (.prim (.measureZ zeroValue oneValue))}
| measurementFalseOnly {? : KrausFamily 2 2}
  {s : Config C} {zeroValue oneValue : C}
  (h_0 : 0 < measureProbability s false)
  (hzero : measureProbability s true = 0)
  (hglobal : KrausFamily.SemEq
    (KrausFamily.comp (measureBranch true) ?) KrausFamily.zero)
  (zeroTree : EvaluationTree C
    (KrausFamily.comp (measureBranch false) ?)
    {s with control := .value (.payload zeroValue),
      quantum := measuredState s false h_0}) :
  EvaluationTree C ?
  {s with control := .term (.prim (.measureZ zeroValue oneValue))}
| measurementTrueOnly {? : KrausFamily 2 2}
  {s : Config C} {zeroValue oneValue : C}
  (hzero : measureProbability s false = 0)

```

```

(h_1 : 0 < measureProbability s true)
(hglobal : KrausFamily.SemEq
  (KrausFamily.comp (measureBranch false) ?) KrausFamily.zero)
(oneTree : EvaluationTree C
  (KrausFamily.comp (measureBranch true) ?)
  {s with control := .value (.payload oneValue),
   quantum := measuredState s true h_1}) :
EvaluationTree C ?
  {s with control := .term (.prim (.measureZ zeroValue oneValue))}

namespace EvaluationTree

/-- A dead branch certificate is channel-level: the composite branch acts as
zero on every input matrix, not merely on the concrete state in the current
configuration. -/
theorem deadComposite_apply_eq_zero
  {? : KrausFamily 2 2} (branch : KrausFamily 2 2)
  (hdead : KrausFamily.SemEq
    (KrausFamily.comp branch ?) KrausFamily.zero)
  (? : Matrix (Fin 2) (Fin 2) ?) :
  KrausFamily.applyMat (KrausFamily.comp branch ?) ? = 0 := by
  rw [hdead]
  exact KrausFamily.applyMat_zero ?

/-- Source-probability endpoint branches are globally dead after every
symbolic prefix, so the endpoint tree constructors need no concrete target
state for the omitted branch. -/
theorem sourceProbability_zero_comp_semEq_zero
  (? : KrausFamily 2 2) :
  KrausFamily.SemEq
    (KrausFamily.comp
      (QuantumAction.kraus (.sourceProbability 0)) ?)
    KrausFamily.zero := by
  intro ?
  rw [KrausFamily.applyMat_comp,
    QuantumAction.apply_sourceProbability 0 (le_refl 0)]
  simp only [Complex.ofReal_zero, zero_smul, KrausFamily.applyMat_zero]

/-- Exact tree height, used as operational fuel. -/
noncomputable def depth {C : Type} {? : KrausFamily 2 2}
  {s : Config C} : EvaluationTree C ? s -> Nat
  | .terminal _ => 0
  | .internal _ t => t.depth + 1
  | .external _ _ t => t.depth + 1
  | .probabilityInterior _ _ l r => max l.depth r.depth + 1
  | .probabilityZero r => r.depth + 1
  | .probabilityOne l => l.depth + 1
  | .measurementBoth _ _ l r => max l.depth r.depth + 1
  | .measurementFalseOnly _ _ _ t => t.depth + 1
  | .measurementTrueOnly _ _ _ t => t.depth + 1

/-- Prepend one consumed external selector to every terminal leaf. -/
def prependSelector {C : Type} (b : Bool) (leaf : TreeLeaf C) :
  TreeLeaf C :=
  { leaf with selectors := b :: leaf.selectors }

/-- Physical operation of an internal step, determined by executable source
syntax. -/
noncomputable def internalOperation {C : Type} {s t : Config C}
  (h : InternalStep s t) : QuantumOperation 2 2 where
  kraus := (internalAction s).kraus
  trace_nonincreasing := by
  cases h with

```

```

| ?variable? => exact (QuantumOperation.identity 2).trace_nonincreasing
| ?lambda? => exact (QuantumOperation.identity 2).trace_nonincreasing
| recursive => exact (QuantumOperation.identity 2).trace_nonincreasing
| application => exact (QuantumOperation.identity 2).trace_nonincreasing
| evaluateArgument =>
    exact (QuantumOperation.identity 2).trace_nonincreasing
| beta => exact (QuantumOperation.identity 2).trace_nonincreasing
| recBeta => exact (QuantumOperation.identity 2).trace_nonincreasing
| returnPrimitive =>
    exact (QuantumOperation.identity 2).trace_nonincreasing
| pauliXPrimitive => exact Qubit.pauliXOp.trace_nonincreasing
| internalLeft =>
    exact (QuantumOperation.identity 2).trace_nonincreasing
| internalRight =>
    exact (QuantumOperation.identity 2).trace_nonincreasing

/-- Fold a completed tree into one finite physical instrument. Its outcomes
are exactly terminal leaves; probability and measurement are combined by
finite instrument bind before any TT embedding. -/
noncomputable def instrument {C : Type} {? : KrausFamily 2 2}
  {s : Config C} :
    EvaluationTree C ? s -> FiniteInstrumentComp 2 (TreeLeaf C)
| .terminal h => FiniteInstrumentComp.unit
    <s, h, []>
| .internal h next =>
    (FiniteInstrumentComp.ofOperation (internalOperation h) Unit.unit).bind
      (fun _ => next.instrument)
| .external selector _ next =>
    next.instrument.map (prependSelector selector)
| .probabilityInterior hp_0 hp_1 leftTree rightTree =>
    (probabilityInstrument _ hp_0.le hp_1.le).bind
      (fun b => if b then rightTree.instrument else leftTree.instrument)
| .probabilityZero rightTree =>
    (probabilityInstrument 0 (le_refl 0) zero_le_one).bind
      (fun b => if b then rightTree.instrument
        else emptyInstrument 2 (TreeLeaf C))
| .probabilityOne leftTree =>
    (probabilityInstrument 1 zero_le_one (le_refl 1)).bind
      (fun b => if b then emptyInstrument 2 (TreeLeaf C)
        else leftTree.instrument)
| .measurementBoth _ _ zeroTree oneTree =>
    Qubit.measureZComp.bind
      (fun b => if b then oneTree.instrument else zeroTree.instrument)
| .measurementFalseOnly _ _ _ zeroTree =>
    Qubit.measureZComp.bind
      (fun b => if b then emptyInstrument 2 (TreeLeaf C)
        else zeroTree.instrument)
| .measurementTrueOnly _ _ _ oneTree =>
    Qubit.measureZComp.bind
      (fun b => if b then oneTree.instrument
        else emptyInstrument 2 (TreeLeaf C))

/-- Structural trace nonincrease of the folded tree instrument. -/
theorem instrument_trace_nonincreasing {C : Type}
  {? : KrausFamily 2 2} {s : Config C}
  (tree : EvaluationTree C ? s) :
  forall ? : Matrix (Fin 2) (Fin 2) ?, ?.PosSemidef ->
    (? o : tree.instrument.Outcome,
      (Matrix.trace
        (KrausFamily.applyMat (tree.instrument.branch o) ?)).re) <=
      (Matrix.trace ?).re :=
  tree.instrument.trace_nonincreasing

```



```

/-- Completed trees available at a fuel bound. -/
def treesAtFuel {C : Type} (start : Config C) (fuel : Nat) :
  Set (EvaluationTree C (KrausFamily.identity 2) start) :=
  {tree | tree.depth <= fuel}

theorem treesAtFuel_mono {C : Type} {start : Config C}
  {fuel fuel' : Nat} (h : fuel <= fuel') :
  treesAtFuel start fuel subseteq treesAtFuel start fuel' :=
  fun _ ht => ht.trans h

end EvaluationTree

end HardwareObservation

end QLambda

```

A.31 QLambda/HardwareOperational.lean

304 lines.

Lean 4 source

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/
import QLambda.TTPhysicalPrimitives

/-!
# A hardware-faithful qubit abstract machine

This module gives a call-by-value CEK machine whose executable configurations
contain an actual normalized qubit density matrix. Quantum transitions use
the existing Kraus matrices directly. Internal, probabilistic, and
environment-selected transitions are deliberately separate.

Kraus histories are proof/debugging metadata (`GhostHistory`), not part of an
executable `Config`.
-/

open Matrix
open scoped MatrixOrder ComplexOrder

namespace QLambda
namespace HardwareOperational

open TTPhysicalPrimitives

/-- A normalized finite-dimensional density matrix. -/
structure NormalizedDensity (n : Nat) where
  mat : Matrix (Fin n) (Fin n) ?
  posSemidef : mat.PosSemidef
  trace_eq_one : Matrix.trace mat = 1

namespace NormalizedDensity

variable {n m : Nat}

@[ext]
theorem ext {? sigma : NormalizedDensity n} (h : ?.mat = sigma.mat) : ? = sigma := by
  cases ?
  cases sigma
  congr

```

```

/-- The Born weight of a Kraus branch on a normalized state. -/
def bornWeight (K : KrausFamily n m) (? : NormalizedDensity n) : ? :=
  (Matrix.trace (KrausFamily.applyMat K ?.mat)).re

theorem bornWeight_nonneg (K : KrausFamily n m) (? : NormalizedDensity n) :
  0 <= bornWeight K ? := by
  have hpos :=
    KrausFamily.applyMat_posSemidef K ?.posSemidef
  simp [bornWeight, Matrix.trace] using
    (Finset.sum_nonneg fun (i : Fin m) (_ : i in Finset.univ) =>
      (Complex.nonneg_iff.mp hpos.diag_nonneg).1)

/-- Normalize a nonzero Kraus branch. The strict positivity hypothesis is
exactly the condition under which the hardware branch can occur. -/
noncomputable def normalizeBranch (K : KrausFamily n m)
  (? : NormalizedDensity n) (h : 0 < bornWeight K ?) :
  NormalizedDensity m where
  mat := (bornWeight K ?)^-1 * KrausFamily.applyMat K ?.mat
  posSemidef :=
    (KrausFamily.applyMat_posSemidef K ?.posSemidef).smul
    (inv_nonneg.mpr (le_of_lt h))
  trace_eq_one := by
    rw [Matrix.trace_smul]
  have hpos :=
    KrausFamily.applyMat_posSemidef K ?.posSemidef
  have him :
    (Matrix.trace (KrausFamily.applyMat K ?.mat)).im = 0 := by
    simp [Matrix.trace] using
      (Finset.sum_eq_zero fun (i : Fin m) (_ : i in Finset.univ) =>
        (Complex.nonneg_iff.mp hpos.diag_nonneg).2.symm)
  have htrace :
    Matrix.trace (KrausFamily.applyMat K ?.mat) =
      (bornWeight K ? : ?) := by
    apply Complex.ext
    * rfl
    * simp using him
  rw [htrace]
  simp [ne_of_gt h]

@[simp]
theorem normalizeBranch_mat (K : KrausFamily n m)
  (? : NormalizedDensity n) (h : 0 < bornWeight K ?) :
  (normalizeBranch K ? h).mat =
    (bornWeight K ?)^-1 * KrausFamily.applyMat K ?.mat :=
  rfl

/-- Pauli-X preserves normalization, so it is an internal deterministic
hardware transition rather than a weighted branch. -/
def pauliX (? : NormalizedDensity 2) : NormalizedDensity 2 where
  mat := KrausFamily.applyMat Qubit.pauliXOp.kraus ?.mat
  posSemidef :=
    KrausFamily.applyMat_posSemidef Qubit.pauliXOp.kraus ?.posSemidef
  trace_eq_one := by
    exact (KrausFamily.trace_applyMat_isometry Qubit.pauliX
      Qubit.pauliX_mul_self ?.mat).trans ?.trace_eq_one

end NormalizedDensity

/-- Runtime values retain lexical closures. Primitive results use the generic
classical payload `C`. -/
inductive RuntimeValue (C : Type) where
  | payload (value : C)

```

```

    | closure (arg : Name) (body : Term (QubitPrimitive C))
      (env : List (Name x RuntimeValue C))
    | recClosure (self arg : Name) (body : Term (QubitPrimitive C))
      (env : List (Name x RuntimeValue C))

abbrev RuntimeEnv (C : Type) := List (Name x RuntimeValue C)

namespace RuntimeEnv

/-- Most-recent-binding lookup for lexical environments. -/
def lookup {C : Type} (x : Name) : RuntimeEnv C -> Option (RuntimeValue C)
| [] => none
| (y, v) :: ? => if x = y then some v else lookup x ?

/-- Extend a lexical environment with one binding. -/
def bind {C : Type} (x : Name) (v : RuntimeValue C)
  (? : RuntimeEnv C) : RuntimeEnv C :=
  (x, v) :: ?

end RuntimeEnv

/-- Call-by-value CEK frames. -/
inductive Frame (C : Type) where
| argument (arg : Term (QubitPrimitive C)) (env : RuntimeEnv C)
| function (fn : RuntimeValue C)

abbrev EvalStack (C : Type) := List (Frame C)

/-- The current CEK control component. -/
inductive Control (C : Type) where
| term (code : Term (QubitPrimitive C))
| value (result : RuntimeValue C)

/-- Executable machine configuration. It contains syntax, ordinary runtime
data, and one concrete normalized qubit state; no denotational-domain object
or continuation powerdomain is present. -/
structure Config (C : Type) where
  control : Control C
  env : RuntimeEnv C
  stack : EvalStack C
  quantum : NormalizedDensity 2

/-- Initial hardware configuration for a closed program. The quantum
register is concrete; lexical environment and continuation stack are empty. -/
def initialConfig {C : Type} (code : Term (QubitPrimitive C))
  (quantum : NormalizedDensity 2) : Config C where
  control := .term code
  env := []
  stack := []
  quantum := quantum

/-- Optional proof/debugging metadata. Keeping this wrapper separate ensures
that Kraus presentations are not runtime state. -/
structure GhostHistory (C : Type) where
  config : Config C
  kraus : List (KrausFamily 2 2)

/-- The actual branch family used by computational-basis measurement. -/
def measureBranch (b : Bool) : KrausFamily 2 2 :=
  Qubit.measureZComp.branch b

/-- Born probability for one computational-basis outcome. -/
def measureProbability {C : Type} (s : Config C) (b : Bool) : ? :=

```

```

NormalizedDensity.bornWeight (measureBranch b) s.quantum

theorem measureProbability_nonneg {C : Type} (s : Config C) (b : Bool) :
  0 <= measureProbability s b :=
  NormalizedDensity.bornWeight_nonneg _ _

/-- The two Z-measurement Born probabilities exhaust unit mass on a
normalized input state. -/
theorem measureProbability_false_add_true {C : Type} (s : Config C) :
  measureProbability s false + measureProbability s true = 1 := by
  change
    (Matrix.trace (KrausFamily.applyMat [Qubit.proj0] s.quantum.mat)).re +
      (Matrix.trace
        (KrausFamily.applyMat [Qubit.proj1] s.quantum.mat)).re =
      1
  rw [Qubit.trace_proj_apply Qubit.proj0 Qubit.proj0_mul_self
    Qubit.proj0_conjTranspose,
    Qubit.trace_proj_apply Qubit.proj1 Qubit.proj1_mul_self
    Qubit.proj1_conjTranspose,
    <- Complex.add_re, <- Matrix.trace_add, <- Matrix.add_mul,
    Qubit.proj0_add_proj1, Matrix.one_mul, s.quantum.trace_eq_one]
  rfl

theorem measureProbability_le_one {C : Type} (s : Config C) (b : Bool) :
  measureProbability s b <= 1 := by
  cases b
  * nlinarith [measureProbability_nonneg s true,
    measureProbability_false_add_true s]
  * nlinarith [measureProbability_nonneg s false,
    measureProbability_false_add_true s]

/-- The normalized post-measurement state for a nonzero outcome. -/
noncomputable def measuredState {C : Type} (s : Config C) (b : Bool)
  (h : 0 < measureProbability s b) : NormalizedDensity 2 :=
  NormalizedDensity.normalizeBranch (measureBranch b) s.quantum h

/-- Administrative CEK reduction, b-reduction, internal choice, deterministic
return, and Pauli-X. These steps carry no probabilistic weight. -/
inductive InternalStep {C : Type} : Config C -> Config C -> Prop where
  | variable {s : Config C} {x : Name} {v : RuntimeValue C}
    (h : RuntimeEnv.lookup x s.env = some v) :
    InternalStep { s with control := .term (.var x) }
    { s with control := .value v }
  | lambda {s : Config C} {x : Name} {body : Term (QubitPrimitive C)} :
    InternalStep { s with control := .term (.lam x body) }
    { s with control := .value (.closure x body s.env) }
  | recursive {s : Config C} {self arg : Name}
    {body : Term (QubitPrimitive C)} :
    InternalStep { s with control := .term (.recLam self arg body) }
    { s with control := .value (.recClosure self arg body s.env) }
  | application {s : Config C} {fn arg : Term (QubitPrimitive C)} :
    InternalStep { s with control := .term (.app fn arg) }
    { s with
      control := .term fn
      stack := .argument arg s.env :: s.stack }
  | evaluateArgument {s : Config C} {fn : RuntimeValue C}
    {arg : Term (QubitPrimitive C)} {callEnv : RuntimeEnv C}
    {rest : EvalStack C} :
    InternalStep
      { s with control := .value fn
        stack := .argument arg callEnv :: rest }
      { s with control := .term arg
        env := callEnv

```

```

        stack := .function fn :: rest }
| beta {s : Config C} {x : Name} {body : Term (QubitPrimitive C)}
  {closureEnv : RuntimeEnv C} {arg : RuntimeValue C}
  {rest : EvalStack C} :
  InternalStep
    { s with control := .value arg
      stack := .function (.closure x body closureEnv) :: rest }
    { s with control := .term body
      env := RuntimeEnv.bind x arg closureEnv
      stack := rest }
| recBeta {s : Config C} {self x : Name}
  {body : Term (QubitPrimitive C)} {closureEnv : RuntimeEnv C}
  {arg : RuntimeValue C} {rest : EvalStack C} :
  InternalStep
    { s with control := .value arg
      stack :=
        .function (.recClosure self x body closureEnv) :: rest }
    { s with control := .term body
      env :=
        RuntimeEnv.bind x arg
        (RuntimeEnv.bind self
          (.recClosure self x body closureEnv) closureEnv)
      stack := rest }
| returnPrimitive {s : Config C} {value : C} :
  InternalStep { s with control := .term (.prim (.ret value)) }
  { s with control := .value (.payload value) }
| pauliXPrimitive {s : Config C} {value : C} :
  InternalStep { s with control := .term (.prim (.pauliX value)) }
  { s with
    control := .value (.payload value)
    quantum := NormalizedDensity.pauliX s.quantum }
| internalLeft {s : Config C} {left right : Term (QubitPrimitive C)} :
  InternalStep { s with control := .term (.intern left right) }
  { s with control := .term left }
| internalRight {s : Config C} {left right : Term (QubitPrimitive C)} :
  InternalStep { s with control := .term (.intern left right) }
  { s with control := .term right }

/-- Weighted transitions. Source-level probabilistic choice retains its
declared weight; measurement uses the Born weight and only constructs a
normalized target when that weight is strictly positive. -/
inductive WeightedStep {C : Type} : Config C -> ? -> Config C -> Prop where
| probabilityLeft {s : Config C} {p : ?}
  {left right : Term (QubitPrimitive C)}
  (hp : 0 < p) (hp1 : p <= 1) :
  WeightedStep { s with control := .term (.prob p left right) } p
  { s with control := .term left }
| probabilityRight {s : Config C} {p : ?}
  {left right : Term (QubitPrimitive C)}
  (hp : 0 <= p) (hp1 : p < 1) :
  WeightedStep { s with control := .term (.prob p left right) } (1 - p)
  { s with control := .term right }
| measurement {s : Config C} {zeroValue oneValue : C} {b : Bool}
  (h : 0 < measureProbability s b) :
  WeightedStep
    { s with
      control := .term (.prim (.measureZ zeroValue oneValue)) }
    (measureProbability s b)
    { s with
      control := .value (.payload (if b then oneValue else zeroValue))
      quantum := measuredState s b h }

/-- External choice is resolved only by an explicit Boolean selector. -/

```

```

inductive ExternalStep {C : Type} : Config C -> Bool -> Config C -> Prop where
  | selectFalse {s : Config C} {left right : Term (QubitPrimitive C)} :
    ExternalStep { s with control := .term (.extern left right) } false
    { s with control := .term left }
  | selectTrue {s : Config C} {left right : Term (QubitPrimitive C)} :
    ExternalStep { s with control := .term (.extern left right) } true
    { s with control := .term right }

end HardwareOperational
end QLambda

```

A.32 QLambda/InstrumentPower.lean

460 lines.

Lean 4 source (lines 1–400)

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/
import Mathlib.Order.Antisymmetrization
import QLambda.QuantumInstrument
import QLambda.QuantumPower
import QLambda.ScottLowerSet

/#!
# Fixed-register instrument powerdomain

This module separates three layers:

1. finite Kraus-presented computations;
2. their observational refinement preorder and antisymmetrization;
3. a Scott-closed lower completion.

The register dimension `n` is fixed externally. The active
`InstrumentPower` closes lower sets under existing directed limits. This
removes the false compactness assertion made by the discarded plain
lower-set completion.
-/

open Matrix
open scoped MatrixOrder

namespace QLambda

open Scott1972.ContinuousLattice

universe u v

namespace FiniteInstrumentComp

variable {n : Nat} {D : Type u} {E : Type v}

/-- A quantum postcondition is a Kraus-valued predicate monotone in the
residual CP order. -/
structure KrausPost (n : Nat) (D : Type u) [Preorder D] where
  pred : D -> KrausFamily n n
  mono : forall ?d e?, d <= e -> KrausFamily.Refines (pred d) (pred e)

namespace KrausPost

```

```

instance [Preorder D] : CoeFun (KrausPost n D) (fun _ => D -> KrausFamily n n) :=
  <pred>

/-- Pull a quantum postcondition back along a monotone map. -/
def comap [Preorder D] [Preorder E] (P : KrausPost n E) (f : D -> o E) :
  KrausPost n D where
  pred := P.comp f
  mono := fun _ _ h => P.mono (f.mono h)

end KrausPost

/-- Weakest-precondition aggregation: execute each branch and then its
value-dependent quantum postcondition. -/
noncomputable def wpKraus [Preorder D] (? : FiniteInstrumentComp n D)
  (P : D -> KrausFamily n n) : KrausFamily n n := by
  classical
  exact Finset.univ.toList.flatMap fun o =>
    KrausFamily.comp (P (? .value o)) (? .branch o)

theorem applyMat_wpKraus [Preorder D] (? : FiniteInstrumentComp n D)
  (P : D -> KrausFamily n n) (? : Matrix (Fin n) (Fin n) ?) :
  KrausFamily.applyMat (? .wpKraus P) ? =
    ? o : ? .Outcome,
    KrausFamily.applyMat
      (KrausFamily.comp (P (? .value o)) (? .branch o)) ? := by
  classical
  unfold wpKraus
  rw [KrausFamily.applyMat_flatMap]
  simp

/-- Weakest-precondition action is invariant under outcome reindexing that
preserves branches and returned values. -/
theorem wpKraus_congr_of_outcome_equiv [Preorder D]
  (? ? : FiniteInstrumentComp n D)
  (e : ? .Outcome ? ? .Outcome)
  (hbranch : forall o, ? .branch (e o) = ? .branch o)
  (hvalue : forall o, ? .value (e o) = ? .value o)
  (P : D -> KrausFamily n n) :
  KrausFamily.SemEq (? .wpKraus P) (? .wpKraus P) := by
  intro ?
  rw [applyMat_wpKraus, applyMat_wpKraus]
  refine Fintype.sum_equiv e
    (fun o => KrausFamily.applyMat
      (KrausFamily.comp (P (? .value o)) (? .branch o)) ?)
    (fun q => KrausFamily.applyMat
      (KrausFamily.comp (P (? .value q)) (? .branch q)) ?)
    ?_
  intro o
  rw [hbranch o, hvalue o]

theorem wpKraus_unit_semEq [Preorder D] (d : D)
  (P : D -> KrausFamily n n) :
  KrausFamily.SemEq ((unit (n := n) d).wpKraus P) (P d) := by
  intro ?
  rw [applyMat_wpKraus]
  change (? _ : Unit,
    KrausFamily.applyMat
      (KrausFamily.comp (P d) (KrausFamily.identity n)) ?) =
    KrausFamily.applyMat (P d) ?
  simp

theorem wpKraus_ofOperation_semEq [Preorder D]
  (? : QuantumOperation n n) (d : D)

```

```

(P : D -> KrausFamily n n) :
KrausFamily.SemEq
  ((ofOperation ? d).wpKraus P)
  (KrausFamily.comp (P d) ?.kraus) := by
intro ?
rw [applyMat_wpKraus]
change
  (? _ : Unit,
    KrausFamily.applyMat
      (KrausFamily.comp (P d) ?.kraus) ?) =
    KrausFamily.applyMat
      (KrausFamily.comp (P d) ?.kraus) ?
simp

theorem wpKraus_bind_semEq [Preorder D] [Preorder E]
  (? : FiniteInstrumentComp n D) (f : D -> FiniteInstrumentComp n E)
  (P : E -> KrausFamily n n) :
  KrausFamily.SemEq ((?.bind f).wpKraus P)
    (?.wpKraus fun d => (f d).wpKraus P) := by
intro ?
rw [applyMat_wpKraus, applyMat_wpKraus]
change
  (? p : Sigma o : ?.Outcome, (f (?.value o)).Outcome,
    KrausFamily.applyMat
      (KrausFamily.comp
        (P ((f (?.value p.1)).value p.2))
        (KrausFamily.comp
          ((f (?.value p.1)).branch p.2)
          (?.branch p.1))) ?) =
    ? o : ?.Outcome,
    KrausFamily.applyMat
      (KrausFamily.comp ((f (?.value o)).wpKraus P) (?.branch o)) ?
rw [Fintype.sum_sigma]
apply Finset.sum_congr rfl
intro o _
rw [KrausFamily.applyMat_comp, applyMat_wpKraus]
simp only [KrausFamily.applyMat_comp]

/-- Bind then observe is likewise invariant under the same reindexing. -/
theorem bind_wpKraus_congr_of_outcome_equiv [Preorder D] [Preorder E]
  (?? : FiniteInstrumentComp n D)
  (e : ?.Outcome ? ?.Outcome)
  (hbranch : forall o, ?.branch (e o) = ?.branch o)
  (hvalue : forall o, ?.value (e o) = ?.value o)
  (? : D -> FiniteInstrumentComp n E)
  (P : E -> KrausFamily n n) :
  KrausFamily.SemEq ((?.bind ?).wpKraus P) ((?.bind ?).wpKraus P) := by
intro ?
calc
  KrausFamily.applyMat ((?.bind ?).wpKraus P) ? =
    KrausFamily.applyMat (?.wpKraus fun d => (? d).wpKraus P) ? :=
    wpKraus_bind_semEq ? ? P ?
  _ = KrausFamily.applyMat (?.wpKraus fun d => (? d).wpKraus P) ? :=
    wpKraus_congr_of_outcome_equiv ? ? e hbranch hvalue
    (fun d => (? d).wpKraus P) ?
  _ = KrausFamily.applyMat ((?.bind ?).wpKraus P) ? :=
    (wpKraus_bind_semEq ? ? P ?).symm

/-- Kraus branches whose returned values lie in `U`. Their concatenation
denotes the sum of those CP branches and is independent of list order at
the Choi level. -/
noncomputable def selectedKraus (? : FiniteInstrumentComp n D) (U : Set D) :
  KrausFamily n n := by

```



```

classical
exact ((Finset.univ.filter fun o : ?.Outcome => ?.value o in U).toList).flatMap ?.branch

/-- Choi denotation of the branches selected by an outcome test. -/
noncomputable def testChoi (? : FiniteInstrumentComp n D) (U : Set D) :
  Matrix (Fin n x Fin n) (Fin n x Fin n) ? := by
  classical
  exact ? o : ?.Outcome,
    if ?.value o in U then KrausFamily.choi (?.branch o) else 0

/-- Weakest-precondition/TT refinement. It quantifies over all monotone
Kraus-valued postconditions, making the order stable under monotone
value-dependent quantum continuations. -/
def Refines [Preorder D] (? ? : FiniteInstrumentComp n D) : Prop :=
  forall P : KrausPost n D, KrausFamily.Refines (?.wpKraus P) (?.wpKraus P)

theorem refines_refl [Preorder D] (? : FiniteInstrumentComp n D) :
  Refines ? ? :=
  fun _ => KrausFamily.residualRefines_refl _

theorem refines_trans [Preorder D] {? ? ? : FiniteInstrumentComp n D}
  (h?? : Refines ? ?) (h?? : Refines ? ?) : Refines ? ? :=
  fun P => KrausFamily.residualRefines_trans (h?? P) (h?? P)

noncomputable instance instPreorderFiniteInstrumentComp [Preorder D] :
  Preorder (FiniteInstrumentComp n D) where
  le := Refines
  le_refl := refines_refl
  le_trans _ _ _ := refines_trans

theorem le_def [Preorder D] {? ? : FiniteInstrumentComp n D} :
  ? <= ? <-> forall P : KrausPost n D,
    KrausFamily.Refines (?.wpKraus P) (?.wpKraus P) :=
  Iff.rfl

namespace KrausPost

/-- Pull a postcondition backwards through a refinement-monotone finite
instrument continuation. -/
noncomputable def bind [Preorder D] [Preorder E] (P : KrausPost n E)
  (f : D -> FiniteInstrumentComp n E) (hf : Monotone f) :
  KrausPost n D where
  pred := fun d => (f d).wpKraus P
  mono := fun _ _ h => hf h P

end KrausPost

theorem wpKraus_mono_pred [Preorder D] (? : FiniteInstrumentComp n D)
  {P Q : D -> KrausFamily n n}
  (hPQ : forall d, KrausFamily.Refines (P d) (Q d)) :
  KrausFamily.Refines (?.wpKraus P) (?.wpKraus Q) := by
  classical
  unfold wpKraus
  apply KrausFamily.residualRefines_flatMap
  intro o _
  exact KrausFamily.residualRefines_comp_right (?.branch o) (hPQ (?.value o))

theorem wpKraus_semEq_pred [Preorder D] (? : FiniteInstrumentComp n D)
  {P Q : D -> KrausFamily n n}
  (hPQ : forall d, KrausFamily.SemEq (P d) (Q d)) :
  KrausFamily.SemEq (?.wpKraus P) (?.wpKraus Q) := by
  intro ?
  rw [applyMat_wpKraus, applyMat_wpKraus]

```

```

    apply Finset.sum_congr rfl
    intro o _
    simp only [KrausFamily.applyMat_comp]
    exact hPQ (? .value o) (KrausFamily.applyMat (? .branch o) ?)

theorem wpKraus_map [Preorder D] [Preorder E]
  (f : D → E) (? : FiniteInstrumentComp n D) (P : E → KrausFamily n n) :
  (? .map f).wpKraus P = ?.wpKraus (P comp f) := by
  rfl

/-- Pushforward respects TT refinement along monotone maps. -/
theorem map_mono [Preorder D] [Preorder E] (f : D → o E) :
  Monotone (FiniteInstrumentComp.map (n := n) (f : D → E)) := by
  intro ? ? h?? P
  rw [wpKraus_map, wpKraus_map]
  exact h?? (P.comap f)

/-- Pointwise larger result maps produce observationally larger
pushforwards. -/
theorem map_le_map [Preorder D] [Preorder E]
  {f g : D → o E} (hfg : f ≤ g) (? : FiniteInstrumentComp n D) :
  ?.map f ≤ ?.map g := by
  intro P
  rw [wpKraus_map, wpKraus_map]
  exact wpKraus_mono_pred ? fun d => P.mono (hfg d)

/-- Deterministic return is monotone in its returned value. -/
theorem unit_mono [Preorder D] :
  Monotone (unit (n := n) : D → FiniteInstrumentComp n D) := by
  intro d e hde P
  exact KrausFamily.residualRefines_trans
    (KrausFamily.residualRefines_of_semEq (wpKraus_unit_semEq d P))
    (KrausFamily.residualRefines_trans
      (P.mono hde)
      (KrausFamily.residualRefines_of_semEq
        (KrausFamily.applySemEq_symm (wpKraus_unit_semEq e P))))

/-- Bind is monotone in its computation argument when the continuation
is monotone in TT refinement. -/
theorem bind_mono_left [Preorder D] [Preorder E]
  (f : D → FiniteInstrumentComp n E) (hf : Monotone f) :
  Monotone fun ? : FiniteInstrumentComp n D => ?.bind f := by
  intro ? ? h?? P
  exact KrausFamily.residualRefines_trans
    (KrausFamily.residualRefines_of_semEq (wpKraus_bind_semEq ? f P))
    (KrausFamily.residualRefines_trans
      (h?? (P.bind f hf))
      (KrausFamily.residualRefines_of_semEq
        (KrausFamily.applySemEq_symm (wpKraus_bind_semEq ? f P))))

/-- Bind is monotone in a pointwise-refined continuation. -/
theorem bind_mono_right [Preorder D] [Preorder E]
  (? : FiniteInstrumentComp n D)
  {f g : D → FiniteInstrumentComp n E} (hfg : forall d, f d ≤ g d) :
  ?.bind f ≤ ?.bind g := by
  intro P
  exact KrausFamily.residualRefines_trans
    (KrausFamily.residualRefines_of_semEq (wpKraus_bind_semEq ? f P))
    (KrausFamily.residualRefines_trans
      (wpKraus_mono_pred ? fun d => hfg d P)
      (KrausFamily.residualRefines_of_semEq
        (KrausFamily.applySemEq_symm (wpKraus_bind_semEq ? g P))))

```

```

/-- Two-sided bind congruence for monotone continuations. -/
theorem bind_mono [Preorder D] [Preorder E]
  {f g : FiniteInstrumentComp n D} (h?? : ? <= ?)
  {f g : D -> FiniteInstrumentComp n E} (hf : Monotone f)
  (hfg : forall d, f d <= g d) :
  ?.bind f <= ?.bind g :=
  (bind_mono_left f hf h??).trans (bind_mono_right ? hfg)

/-- Mutual TT refinement, used to state finite monad laws before
antisymmetrization. -/
def Equiv [Preorder D] (? ? : FiniteInstrumentComp n D) : Prop :=
  ? <= ? /\ ? <= ?

theorem equiv_of_wpKraus_semEq [Preorder D]
  {f g : FiniteInstrumentComp n D}
  (h : forall P : KrausPost n D,
    KrausFamily.SemEq (?.wpKraus P) (?.wpKraus P)) :
  Equiv ? ? := by
  constructor <;> intro P
  * exact KrausFamily.residualRefines_of_semEq (h P)
  * exact KrausFamily.residualRefines_of_semEq
    (KrausFamily.applySemEq_symm (h P))

theorem unit_bind_equiv [Preorder D] [Preorder E]
  (d : D) (f : D -> FiniteInstrumentComp n E) :
  Equiv ((unit (n := n) d).bind f) (f d) := by
  apply equiv_of_wpKraus_semEq
  intro P
  exact KrausFamily.applySemEq_trans
    (wpKraus_bind_semEq (unit (n := n) d) f P)
    (wpKraus_unit_semEq d fun x => (f x).wpKraus P)

theorem bind_unit_equiv [Preorder D] (? : FiniteInstrumentComp n D) :
  Equiv (?.bind (unit (n := n))) ? := by
  apply equiv_of_wpKraus_semEq
  intro P
  exact KrausFamily.applySemEq_trans
    (wpKraus_bind_semEq ? (unit (n := n)) P)
    (wpKraus_semEq_pred ? fun d => wpKraus_unit_semEq d P)

/-- Associativity of finite instrument bind, modulo mutual TT refinement. -/
theorem bind_assoc_equiv [Preorder D] [Preorder E] {F : Type u} [Preorder F]
  (? : FiniteInstrumentComp n D)
  (f : D -> FiniteInstrumentComp n E)
  (g : E -> FiniteInstrumentComp n F) :
  Equiv ((?.bind f).bind g) (?.bind fun d => (f d).bind g) := by
  apply equiv_of_wpKraus_semEq
  intro P
  exact KrausFamily.applySemEq_trans
    (wpKraus_bind_semEq (?.bind f) g P)
    (KrausFamily.applySemEq_trans
      (wpKraus_bind_semEq ? f fun e => (g e).wpKraus P)
      (KrausFamily.applySemEq_trans
        (wpKraus_semEq_pred ? fun d =>
          KrausFamily.applySemEq_symm (wpKraus_bind_semEq (f d) g P))
        (KrausFamily.applySemEq_symm
          (wpKraus_bind_semEq ? (fun d => (f d).bind g) P))))))

theorem map_equiv_bind_unit [Preorder D] [Preorder E]
  (f : D -> E) (? : FiniteInstrumentComp n D) :
  Equiv (?.map f) (?.bind fun d => unit (n := n) (f d)) := by
  apply equiv_of_wpKraus_semEq
  intro P

```

```

rw [wpKraus_map]
exact KrausFamily.applySemEq_symm <|
  KrausFamily.applySemEq_trans
    (wpKraus_bind_semEq ? (fun d => unit (n := n) (f d)) P)
    (wpKraus_semEq_pred ? fun d => wpKraus_unit_semEq (f d) P)

/-- Pushforward as an order homomorphism on finite presentations. -/
noncomputable def mapHom [CompleteLattice D] [CompleteLattice E] (f : ScottMap D E) :
  FiniteInstrumentComp n D -> o FiniteInstrumentComp n E :=
  <FiniteInstrumentComp.map (n := n) (f : D -> E),
  map_mono (n := n) <f, f.monotone>>

end FiniteInstrumentComp

/-- Finite instruments modulo mutual observational refinement. -/
abbrev SemanticInstrument (n : Nat) (D : Type u) [CompleteLattice D] :=
  Antisymmetrization (FiniteInstrumentComp n D) (* <= *)

/-- Scott-closed Hoare completion of finite semantic instruments.
Arbitrary joins take Scott closure after union, so limit instruments are
not forced to be compact principals. -/
abbrev InstrumentPower (n : Nat) (D : Type u) [CompleteLattice D] :=
  ScottLowerSet (SemanticInstrument n D)

namespace InstrumentPower

variable {n : Nat} {D E : Type u} [CompleteLattice D] [CompleteLattice E]

/-- Embed a finite computation by Scott-closing its principal ideal. -/
noncomputable def ofFinite (? : FiniteInstrumentComp n D) : InstrumentPower n D :=
  ScottLowerSet.principal (toAntisymmetrization (* <= *) ?)

theorem ofFinite_le_iff {? : FiniteInstrumentComp n D}
  {A : InstrumentPower n D} :
  ofFinite ? <= A <-> toAntisymmetrization (* <= *) ? in A :=
  ScottLowerSet.principal_le_iff_mem

theorem ofFinite_mono :
  Monotone (ofFinite (n := n) (D := D)) := by

```

Lean 4 source (lines 401–460)

```

intro ? ? h??
rw [ofFinite_le_iff]
exact ScottLowerSet.mem_principal.mpr (toAntisymmetrization_mono h??)

/-- Pushforward on the antisymmetrized finite semantic basis. -/
noncomputable def basisMap (f : ScottMap D E) :
  SemanticInstrument n D -> o SemanticInstrument n E :=
  (FiniteInstrumentComp.mapHom f).antisymmetrization

theorem basisMap_le {f g : ScottMap D E} (hfg : f <= g) :
  basisMap (n := n) f <= basisMap (n := n) g := by
  intro a
  refine Antisymmetrization.induction_on (* <= *) a ?_
  intro ?
  rw [basisMap, basisMap,
    OrderHom.antisymmetrization_apply_mk,
    OrderHom.antisymmetrization_apply_mk,
    toAntisymmetrization_le_toAntisymmetrization_iff]
  exact FiniteInstrumentComp.map_le_map
    (f := <f, f.monotone>) (g := <g, g.monotone>) hfg ?

@[simp] theorem basisMap_id :

```

```

    basisMap (n := n) (ScottMap.idMap : ScottMap D D) = OrderHom.id := by
  apply OrderHom.ext
  funext a
  refine Antisymmetrization.induction_on (* <= *) a ?_
  intro ?
  rw [basisMap, OrderHom.antisymmetrization_apply_mk]
  change toAntisymmetrization (* <= *)
    (FiniteInstrumentComp.map (n := n)
      (ScottMap.idMap : D -> D) ?) =
    toAntisymmetrization (* <= *) ?
  have hid : (ScottMap.idMap : D -> D) = id := by
    funext d
    rfl
  rw [hid, FiniteInstrumentComp.map_id]

theorem basisMap_comp {F : Type u} [CompleteLattice F]
  (g : ScottMap E F) (f : ScottMap D E) :
  basisMap (n := n) (g.comp f) =
  (basisMap (n := n) g).comp (basisMap (n := n) f) := by
  apply OrderHom.ext
  funext a
  refine Antisymmetrization.induction_on (* <= *) a ?_
  intro ?
  rw [basisMap, OrderHom.antisymmetrization_apply_mk]
  change toAntisymmetrization (* <= *)
    (FiniteInstrumentComp.map (n := n)
      ((g : E -> F) comp (f : D -> E)) ?) =
    basisMap (n := n) g
    (basisMap (n := n) f (toAntisymmetrization (* <= *) ?))
  rw [basisMap, basisMap,
    OrderHom.antisymmetrization_apply_mk,
    OrderHom.antisymmetrization_apply_mk]
  apply congrArg (toAntisymmetrization (* <= *))
  exact FiniteInstrumentComp.map_comp (g : E -> F) (f : D -> E) ?

end InstrumentPower

end QLambda

```

A.33 QLambda/Interp.lean

2007 lines.

Lean 4 source (lines 1–400)

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/
import QLambda.Effects
import QLambda.Monad
import QLambda.Operational
import QLambda.Syntax
import QLambda.QuantumDomainEquation

/-!
# Denotational interpretation of `qfun`

Paper S2 and S7. Every term denotes a computation in  $\mathcal{Q}(D_{\text{inf}})$ , where
 $D_{\text{inf}} \rightsquigarrow [D_{\text{inf}} \rightarrow \mathcal{Q}(D_{\text{inf}})]$ :

* pure values enter the computation object through monadic `unit`;

```

```

* application sequences function and argument computations with `bind`;
* abstraction and application use the proved recursive-domain maps;
* primitive and choice denotations are supplied by explicit semantic
  interfaces.
-/

namespace QLambda

open Scott1972.ContinuousLattice

universe u

/-- Environments: names to elements of `D_ inf`. -/
abbrev Env (Dinf : Type u) : Type u := Name -> Dinf

namespace ScottMap

variable {A B C : Type u}
variable [CompleteLattice A] [CompleteLattice B] [CompleteLattice C]

/-- First projection as a Scott map. -/
noncomputable def fstMap : ScottMap (A x B) A :=
  <Prod.fst, continuous_of_preservesDirectedSup fun S _ =>
    Prod.fst_sSup S>

/-- Second projection as a Scott map. -/
noncomputable def sndMap : ScottMap (A x B) B :=
  <Prod.snd, continuous_of_preservesDirectedSup fun S _ =>
    Prod.snd_sSup S>

/-- Pair two Scott maps with a common source. -/
noncomputable def pairMap (f : ScottMap A B) (g : ScottMap A C) :
  ScottMap A (B x C) :=
  <fun x => (f x, g x), continuous_of_preservesDirectedSup fun S hS hdir => by
    apply Prod.ext
    * change f (sSup S) =
      (sSup ((fun x => (f x, g x)) '' S) : B x C).1
      rw [f.preservesDirectedSup_coe S hS hdir, Prod.fst_sSup,
        Set.image_image]
    * change g (sSup S) =
      (sSup ((fun x => (f x, g x)) '' S) : B x C).2
      rw [g.preservesDirectedSup_coe S hS hdir, Prod.snd_sSup,
        Set.image_image]>

/-- Joint evaluation of a Scott map and its argument. -/
noncomputable def evalMap : ScottMap (ScottMap A B x A) B :=
  <fun p => p.1 p.2, corollary_3_4_jointly_continuous>

@[simp] theorem fstMap_apply (p : A x B) : fstMap p = p.1 := rfl
@[simp] theorem sndMap_apply (p : A x B) : sndMap p = p.2 := rfl
@[simp] theorem pairMap_apply (f : ScottMap A B) (g : ScottMap A C)
  (x : A) : pairMap f g x = (f x, g x) := rfl
@[simp] theorem evalMap_apply (p : ScottMap A B x A) :
  evalMap p = p.1 p.2 := rfl

end ScottMap

section Semantics

variable (Q : (D : Type u) -> [CompleteLattice D] -> Type u)
variable [IsQuantumMonad Q]

noncomputable abbrev QModel : QuantumPowerModel :=

```

```

quantumMonadModel Q

variable (D_0 : QDomain.{u})
variable (j_0 : IsContinuousLatticeProjection D_0.carrier
  (QuantumFunctor (QModel Q) D_0.carrier))

/-- The solved recursive value domain for the chosen quantum monad. -/
abbrev SemanticValue : Type u :=
  QDInf (QModel Q) D_0 j_0

/-- The single public codomain of term denotations. -/
abbrev SemanticComp : Type u :=
  Q (SemanticValue Q D_0 j_0)

variable {Q D_0 j_0}

/-- Lookup is Scott-continuous in a pointwise ordered environment. -/
noncomputable def envLookup (x : Name) :
  ScottMap (Env (SemanticValue Q D_0 j_0)) (SemanticValue Q D_0 j_0) :=
  <fun ? => ? x, continuous_of_preservesDirectedSup fun S _ => by
    rw [sSup_apply_eq_sSup_image]>

/-- Update one environment entry, jointly continuously in the old
environment and the new value. -/
noncomputable def envUpdate (x : Name) :
  ScottMap (Env (SemanticValue Q D_0 j_0) x SemanticValue Q D_0 j_0)
    (Env (SemanticValue Q D_0 j_0)) :=
  <fun p y => if y = x then p.2 else p.1 y,
  continuous_of_preservesDirectedSup fun S hS hdir => by
    funext y
    change
      (if y = x then (sSup S).2 else (sSup S).1 y) =
      (sSup ((fun p :
        Env (SemanticValue Q D_0 j_0) x SemanticValue Q D_0 j_0 =>
          fun z => if z = x then p.2 else p.1 z) ' ' S) :
        Env (SemanticValue Q D_0 j_0)) y
    rw [sSup_apply_eq_sSup_image, Set.image_image]
    by_cases hy : y = x
    * subst y
      simp only [if_pos]
      simpa only [Function.eval_apply, if_pos] using Prod.snd_sSup S
    * simp only [if_neg hy]
      rw [Prod.fst_sSup]
      rw [sSup_apply_eq_sSup_image, Set.image_image]
      congr 1
      ext d
      simp only [Set.mem_image, Function.eval_apply,
        if_neg hy]>

@[simp]
theorem envLookup_apply (x : Name) (? : Env (SemanticValue Q D_0 j_0)) :
  envLookup (Q := Q) (D_0 := D_0) (j_0 := j_0) x ? = ? x :=
  rfl

@[simp]
theorem envUpdate_apply (x y : Name)
  (? : Env (SemanticValue Q D_0 j_0)) (d : SemanticValue Q D_0 j_0) :
  envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0) x (?, d) y =
    if y = x then d else ? y :=
  rfl

@[simp]
theorem envUpdate_same (x : Name)

```

```

    (? : Env (SemanticValue Q D_0 j_0)) (d : SemanticValue Q D_0 j_0) :
    envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0) x (?, d) x = d := by
    simp [envUpdate_apply]

theorem envUpdate_other {x y : Name} (hxy : y != x)
    (? : Env (SemanticValue Q D_0 j_0)) (d : SemanticValue Q D_0 j_0) :
    envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0) x (?, d) y = ? y := by
    simp [envUpdate_apply, hxy]

/-- A later update at the same name shadows the earlier one. -/
theorem envUpdate_shadow (x : Name)
    (? : Env (SemanticValue Q D_0 j_0))
    (d e : SemanticValue Q D_0 j_0) :
    envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0) x
      (envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0) x (?, d), e) =
    envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0) x (?, e) := by
    funext y
    by_cases hy : y = x <;> simp [envUpdate_apply, hy]

/-- Updates at distinct names commute. -/
theorem envUpdate_comm {x y : Name} (hxy : x != y)
    (? : Env (SemanticValue Q D_0 j_0))
    (d e : SemanticValue Q D_0 j_0) :
    envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0) y
      (envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0) x (?, d), e) =
    envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0) x
      (envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0) y (?, e), d) := by
    funext z
    by_cases hzx : z = x
    * subst z
      simp [envUpdate_apply, hxy]
    * by_cases hzy : z = y <;>
      simp [envUpdate_apply, hzx, hzy, Ne.symm hxy]

/-- Pure return for the chosen quantum monad. -/
noncomputable abbrev semanticUnit :
    ScottMap (SemanticValue Q D_0 j_0) (SemanticComp Q D_0 j_0) :=
    IsQuantumMonad.unit (Q := Q)

/-- Scott-continuous Kleisli extension for the chosen quantum monad. -/
noncomputable abbrev semanticBind :
    ScottMap
      (ScottMap (SemanticValue Q D_0 j_0) (SemanticComp Q D_0 j_0))
      (ScottMap (SemanticComp Q D_0 j_0) (SemanticComp Q D_0 j_0)) :=
    IsQuantumMonad.bind (Q := Q)

/-- Fold a continuous function value into the recursive domain. -/
noncomputable abbrev semanticFold :
    ScottMap
      (ScottMap (SemanticValue Q D_0 j_0) (SemanticComp Q D_0 j_0))
      (SemanticValue Q D_0 j_0) :=
    qProjInfInf (QModel Q) D_0 j_0

/-- Unfold a recursive-domain value into a quantum function. -/
noncomputable abbrev semanticUnfold :
    ScottMap (SemanticValue Q D_0 j_0)
      (ScottMap (SemanticValue Q D_0 j_0) (SemanticComp Q D_0 j_0)) :=
    qEmbInfInf (QModel Q) D_0 j_0

/-- The pure value denoted by a non-recursive abstraction. -/
noncomputable def lambdaValue (x : Name)
    (body : ScottMap (Env (SemanticValue Q D_0 j_0))
      (SemanticComp Q D_0 j_0)) :

```



```

    ScottMap (Env (SemanticValue Q D_0 j_0))
      (SemanticValue Q D_0 j_0) :=
semanticFold (Q := Q) (D_0 := D_0) (j_0 := j_0) |>.comp <|
  scottLambda <|
    body.comp (envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0) x)

/-- The environment-indexed continuation used after evaluating a function:
evaluate the argument, unfold the function value, and bind the two. -/
noncomputable def applyContinuation
  (ma : ScottMap (Env (SemanticValue Q D_0 j_0))
    (SemanticComp Q D_0 j_0)) :
  ScottMap (Env (SemanticValue Q D_0 j_0))
    (ScottMap (SemanticValue Q D_0 j_0) (SemanticComp Q D_0 j_0)) :=
let innerPair :
  ScottMap
    (Env (SemanticValue Q D_0 j_0) x SemanticValue Q D_0 j_0)
    (ScottMap (SemanticComp Q D_0 j_0) (SemanticComp Q D_0 j_0) x
      SemanticComp Q D_0 j_0) :=
  ScottMap.pairMap
    ((semanticBind (Q := Q) (D_0 := D_0) (j_0 := j_0)).comp
      ((semanticUnfold (Q := Q) (D_0 := D_0) (j_0 := j_0)).comp
        ScottMap.sndMap))
    (ma.comp ScottMap.fstMap)
let inner :
  ScottMap
    (Env (SemanticValue Q D_0 j_0) x SemanticValue Q D_0 j_0)
    (SemanticComp Q D_0 j_0) :=
  ScottMap.evalMap.comp innerPair
scottLambda inner

/-- Call-by-value application, remaining entirely in `Q(D inf)`.-/
noncomputable def applyComp
  (mf ma : ScottMap (Env (SemanticValue Q D_0 j_0))
    (SemanticComp Q D_0 j_0)) :
  ScottMap (Env (SemanticValue Q D_0 j_0))
    (SemanticComp Q D_0 j_0) :=
  ScottMap.evalMap.comp <|
    ScottMap.pairMap
      ((semanticBind (Q := Q) (D_0 := D_0) (j_0 := j_0)).comp
        (applyContinuation (Q := Q) (D_0 := D_0) (j_0 := j_0) ma))
      mf
  mf

@[simp]
theorem applyContinuation_apply
  (ma : ScottMap (Env (SemanticValue Q D_0 j_0))
    (SemanticComp Q D_0 j_0))
  (? : Env (SemanticValue Q D_0 j_0)) (f : SemanticValue Q D_0 j_0) :
  applyContinuation (Q := Q) (D_0 := D_0) (j_0 := j_0) ma ? f =
  semanticBind (Q := Q) (D_0 := D_0) (j_0 := j_0)
    (semanticUnfold (Q := Q) (D_0 := D_0) (j_0 := j_0) f) (ma ?) :=
  rfl

@[simp]
theorem applyComp_apply
  (mf ma : ScottMap (Env (SemanticValue Q D_0 j_0))
    (SemanticComp Q D_0 j_0))
  (? : Env (SemanticValue Q D_0 j_0)) :
  applyComp (Q := Q) (D_0 := D_0) (j_0 := j_0) mf ma ? =
  semanticBind (Q := Q) (D_0 := D_0) (j_0 := j_0)
    (applyContinuation (Q := Q) (D_0 := D_0) (j_0 := j_0) ma ?)
    (mf ?) :=
  rfl

```

```

/-- Application is monotone in the function computation. -/
theorem applyComp_mono_left
  {mf mf' ma : ScottMap (Env (SemanticValue Q D_0 j_0))
    (SemanticComp Q D_0 j_0)}
  (h : mf <= mf') :
  applyComp (Q := Q) (D_0 := D_0) (j_0 := j_0) mf ma <=
    applyComp (Q := Q) (D_0 := D_0) (j_0 := j_0) mf' ma := by
  rw [ScottMap.le_def]
  intro ?
  rw [applyComp_apply, applyComp_apply]
  exact
    (semanticBind (Q := Q) (D_0 := D_0) (j_0 := j_0)
      (applyContinuation (Q := Q) (D_0 := D_0) (j_0 := j_0) ma ?)).monotone
      (ScottMap.le_def.mp h ?)

/-- Application is monotone in the argument computation. -/
theorem applyComp_mono_right
  {mf ma ma' : ScottMap (Env (SemanticValue Q D_0 j_0))
    (SemanticComp Q D_0 j_0)}
  (h : ma <= ma') :
  applyComp (Q := Q) (D_0 := D_0) (j_0 := j_0) mf ma <=
    applyComp (Q := Q) (D_0 := D_0) (j_0 := j_0) mf ma' := by
  rw [ScottMap.le_def]
  intro ?
  rw [applyComp_apply, applyComp_apply]
  apply ScottMap.le_def.mp
    ((semanticBind (Q := Q) (D_0 := D_0) (j_0 := j_0)).monotone ?_)
  rw [ScottMap.le_def]
  intro f
  rw [applyContinuation_apply, applyContinuation_apply]
  exact
    (semanticBind (Q := Q) (D_0 := D_0) (j_0 := j_0)
      (semanticUnfold (Q := Q) (D_0 := D_0) (j_0 := j_0) f)).monotone
      (ScottMap.le_def.mp h ?)

/-- Applying a pure abstraction to a pure argument evaluates its body in
the updated environment. This is the semantic b-equation before relating
environment update to syntactic substitution. -/
theorem applyComp_pure_lambda
  (x : Name)
  (body : ScottMap (Env (SemanticValue Q D_0 j_0))
    (SemanticComp Q D_0 j_0))
  (arg : ScottMap (Env (SemanticValue Q D_0 j_0))
    (SemanticValue Q D_0 j_0))
  (? : Env (SemanticValue Q D_0 j_0)) :
  applyComp (Q := Q) (D_0 := D_0) (j_0 := j_0)
    ((semanticUnit (Q := Q) (D_0 := D_0) (j_0 := j_0)).comp
      (lambdaValue (Q := Q) (D_0 := D_0) (j_0 := j_0) x body))
    ((semanticUnit (Q := Q) (D_0 := D_0) (j_0 := j_0)).comp arg) ? =
    body (envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0)
      x (?, arg ?)) := by
  rw [applyComp_apply]
  change
    semanticBind (Q := Q) (D_0 := D_0) (j_0 := j_0)
      (applyContinuation (Q := Q) (D_0 := D_0) (j_0 := j_0)
        ((semanticUnit (Q := Q) (D_0 := D_0) (j_0 := j_0)).comp arg) ?)
      (semanticUnit (Q := Q) (D_0 := D_0) (j_0 := j_0)
        (lambdaValue (Q := Q) (D_0 := D_0) (j_0 := j_0) x body ?)) =
      body (envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0)
        x (?, arg ?))
  have hOuter := congrArg
    (fun f : ScottMap (SemanticValue Q D_0 j_0) (SemanticComp Q D_0 j_0) =>
      f (lambdaValue (Q := Q) (D_0 := D_0) (j_0 := j_0) x body ?))

```

```

(IsQuantumMonad.unit_bind (Q := Q)
  (applyContinuation (Q := Q) (D_0 := D_0) (j_0 := j_0)
    ((semanticUnit (Q := Q) (D_0 := D_0) (j_0 := j_0)).comp arg) ?))
rw [ScottMap.comp_apply] at hOuter
rw [hOuter, applyContinuation_apply]
change
  semanticBind (Q := Q) (D_0 := D_0) (j_0 := j_0)
    (semanticUnfold (Q := Q) (D_0 := D_0) (j_0 := j_0)
      (lambdaValue (Q := Q) (D_0 := D_0) (j_0 := j_0) x body ?))
    (semanticUnit (Q := Q) (D_0 := D_0) (j_0 := j_0) (arg ?)) =
  body (envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0)
    x (?, arg ?))
have hInner := congrArg
  (fun f : ScottMap (SemanticValue Q D_0 j_0) (SemanticComp Q D_0 j_0) =>
    f (arg ?))
(IsQuantumMonad.unit_bind (Q := Q)
  (semanticUnfold (Q := Q) (D_0 := D_0) (j_0 := j_0)
    (lambdaValue (Q := Q) (D_0 := D_0) (j_0 := j_0) x body ?)))
rw [ScottMap.comp_apply] at hInner
rw [hInner]
change
  qEmbInfInf (QModel Q) D_0 j_0
    (qProjInfInf (QModel Q) D_0 j_0
      (scottLambda
        (body.comp
          (envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0) x) ?))
        (arg ?) =
        body (envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0) x (?, arg ?))
let f :
  ScottMap (SemanticValue Q D_0 j_0) (SemanticComp Q D_0 j_0) :=
  scottLambda
    (body.comp (envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0) x) ?)
have hf := congrArg (fun g :
  ScottMap (SemanticValue Q D_0 j_0) (SemanticComp Q D_0 j_0) =>
    g (arg ?))
  (qEmbInfInf_qProjInfInf (QModel Q) D_0 j_0 f)
simpa only [f, scottLambda_apply, ScottMap.comp_apply] using hf

/-- The environment-indexed continuous functional whose least fixed point
interprets a recursive abstraction. -/
noncomputable def recFunctional (self arg : Name)
  (body : ScottMap (Env (SemanticValue Q D_0 j_0))
    (SemanticComp Q D_0 j_0)) :
  ScottMap (Env (SemanticValue Q D_0 j_0))
    (ScottMap (SemanticValue Q D_0 j_0) (SemanticValue Q D_0 j_0)) :=
let firstUpdate :
  ScottMap
    ((Env (SemanticValue Q D_0 j_0) x SemanticValue Q D_0 j_0) x
      SemanticValue Q D_0 j_0)
    (Env (SemanticValue Q D_0 j_0)) :=
  (envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0) self).comp
  ScottMap.fstMap
let bothUpdates :
  ScottMap
    ((Env (SemanticValue Q D_0 j_0) x SemanticValue Q D_0 j_0) x
      SemanticValue Q D_0 j_0)
    (Env (SemanticValue Q D_0 j_0)) :=
  (envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0) arg).comp <|
  ScottMap.pairMap firstUpdate ScottMap.sndMap
let bodyBySelf :
  ScottMap
    (Env (SemanticValue Q D_0 j_0) x SemanticValue Q D_0 j_0)
    (ScottMap (SemanticValue Q D_0 j_0) (SemanticComp Q D_0 j_0)) :=

```

```

    scottLambda (body.comp bothUpdates)
let selfFunctional :
  ScottMap
    (Env (SemanticValue Q D_0 j_0) x SemanticValue Q D_0 j_0)

```

Lean 4 source (lines 401–800)

```

    (SemanticValue Q D_0 j_0) :=
    (semanticFold (Q := Q) (D_0 := D_0) (j_0 := j_0)).comp bodyBySelf
  scottLambda selfFunctional

/-- The pure value denoted by a recursive abstraction. -/
noncomputable def recLambdaValue (self arg : Name)
  (body : ScottMap (Env (SemanticValue Q D_0 j_0))
    (SemanticComp Q D_0 j_0)) :
  ScottMap (Env (SemanticValue Q D_0 j_0))
    (SemanticValue Q D_0 j_0) :=
  Proposition314.fixMap.comp <|
    recFunctional (Q := Q) (D_0 := D_0) (j_0 := j_0) self arg body

/-- Recursive abstractions satisfy their semantic unfolding equation. -/
theorem recLambdaValue_unfold (self arg : Name)
  (body : ScottMap (Env (SemanticValue Q D_0 j_0))
    (SemanticComp Q D_0 j_0))
  (? : Env (SemanticValue Q D_0 j_0)) :
  recLambdaValue (Q := Q) (D_0 := D_0) (j_0 := j_0) self arg body ? =
  recFunctional (Q := Q) (D_0 := D_0) (j_0 := j_0) self arg body ?
  (recLambdaValue (Q := Q) (D_0 := D_0) (j_0 := j_0)
    self arg body ?) := by
  exact (Proposition314.fix_eq
    (recFunctional (Q := Q) (D_0 := D_0) (j_0 := j_0)
      self arg body ?)).symm

/-- Applying a pure recursive abstraction to a pure argument unfolds one
recursive call and evaluates the body with both binders installed. -/
theorem applyComp_pure_recLambda
  (self arg : Name)
  (body : ScottMap (Env (SemanticValue Q D_0 j_0))
    (SemanticComp Q D_0 j_0))
  (value : ScottMap (Env (SemanticValue Q D_0 j_0))
    (SemanticValue Q D_0 j_0))
  (? : Env (SemanticValue Q D_0 j_0)) :
  applyComp (Q := Q) (D_0 := D_0) (j_0 := j_0)
    ((semanticUnit (Q := Q) (D_0 := D_0) (j_0 := j_0)).comp
      (recLambdaValue (Q := Q) (D_0 := D_0) (j_0 := j_0)
        self arg body))
    ((semanticUnit (Q := Q) (D_0 := D_0) (j_0 := j_0)).comp value) ? =
  body
  (envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0) arg
    (envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0) self
      (?, recLambdaValue (Q := Q) (D_0 := D_0) (j_0 := j_0)
        self arg body ?),
      value ?)) := by
  rw [applyComp_apply]
  change
  semanticBind (Q := Q) (D_0 := D_0) (j_0 := j_0)
    (applyContinuation (Q := Q) (D_0 := D_0) (j_0 := j_0)
      ((semanticUnit (Q := Q) (D_0 := D_0) (j_0 := j_0)).comp value) ?)
    (semanticUnit (Q := Q) (D_0 := D_0) (j_0 := j_0)
      (recLambdaValue (Q := Q) (D_0 := D_0) (j_0 := j_0)
        self arg body ?)) =
  body
  (envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0) arg
    (envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0) self

```

```

        (? , recLambdaValue (Q := Q) (D_0 := D_0) (j_0 := j_0)
          self arg body ?),
        value ?))
have hOuter := congrArg
  (fun f : ScottMap (SemanticValue Q D_0 j_0) (SemanticComp Q D_0 j_0) =>
    f (recLambdaValue (Q := Q) (D_0 := D_0) (j_0 := j_0)
      self arg body ?))
  (IsQuantumMonad.unit_bind (Q := Q)
    (applyContinuation (Q := Q) (D_0 := D_0) (j_0 := j_0)
      ((semanticUnit (Q := Q) (D_0 := D_0) (j_0 := j_0)).comp value) ?))
rw [ScottMap.comp_apply] at hOuter
rw [hOuter, applyContinuation_apply]
have hInner := congrArg
  (fun f : ScottMap (SemanticValue Q D_0 j_0) (SemanticComp Q D_0 j_0) =>
    f (value ?))
  (IsQuantumMonad.unit_bind (Q := Q)
    (semanticUnfold (Q := Q) (D_0 := D_0) (j_0 := j_0)
      (recLambdaValue (Q := Q) (D_0 := D_0) (j_0 := j_0)
        self arg body ?)))
rw [ScottMap.comp_apply] at hInner
change
  semanticBind (Q := Q) (D_0 := D_0) (j_0 := j_0)
    (semanticUnfold (Q := Q) (D_0 := D_0) (j_0 := j_0)
      (recLambdaValue (Q := Q) (D_0 := D_0) (j_0 := j_0)
        self arg body ?))
    (semanticUnit (Q := Q) (D_0 := D_0) (j_0 := j_0) (value ?)) =
  body
    (envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0) arg
      (envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0) self
        (? , recLambdaValue (Q := Q) (D_0 := D_0) (j_0 := j_0)
          self arg body ?),
        value ?))
rw [hInner]
conv_lhs =>
  rw [recLambdaValue_unfold]
change
  qEmbInfInf (QModel Q) D_0 j_0
    (qProjInfInf (QModel Q) D_0 j_0
      (scottLambda
        (body.comp
          ((envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0) arg).comp
            (ScottMap.pairMap
              ((envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0) self).comp
                ScottMap.fstMap)
              ScottMap.sndMap))))
          (? , recLambdaValue (Q := Q) (D_0 := D_0) (j_0 := j_0)
            self arg body ?)))
        (value ?) =
      body
        (envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0) arg
          (envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0) self
            (? , recLambdaValue (Q := Q) (D_0 := D_0) (j_0 := j_0)
              self arg body ?),
            value ?))
let f : ScottMap (SemanticValue Q D_0 j_0) (SemanticComp Q D_0 j_0) :=
  scottLambda
    (body.comp
      ((envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0) arg).comp
        (ScottMap.pairMap
          ((envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0) self).comp
            ScottMap.fstMap)
          ScottMap.sndMap)))
      (? , recLambdaValue (Q := Q) (D_0 := D_0) (j_0 := j_0)
        self arg body ?))

```

```

      self arg body ?)
have hf := congrArg
  (fun g : ScottMap (SemanticValue Q D_0 j_0) (SemanticComp Q D_0 j_0) =>
    g (value ?))
  (qEmbInfInf_qProjInfInf (QModel Q) D_0 j_0 f)
simpa only [f, scottLambda_apply, ScottMap.comp_apply,
  ScottMap.pairMap_apply, ScottMap.fstMap_apply,
  ScottMap.sndMap_apply] using hf

variable [HasComputationChoice (SemanticComp Q D_0 j_0)]

/-- Compositional computation-valued interpretation. Every constructor,
including pure values, denotes an element of `Q(D inf)`. -/
noncomputable def interp {Prim : Type}
  (primitive : Prim -> SemanticComp Q D_0 j_0) :
  Term Prim ->
  ScottMap (Env (SemanticValue Q D_0 j_0)) (SemanticComp Q D_0 j_0)
| .var x =>
  (semanticUnit (Q := Q) (D_0 := D_0) (j_0 := j_0)).comp
  (envLookup (Q := Q) (D_0 := D_0) (j_0 := j_0) x)
| .lam x M =>
  (semanticUnit (Q := Q) (D_0 := D_0) (j_0 := j_0)).comp
  (lambdaValue (Q := Q) (D_0 := D_0) (j_0 := j_0) x
    (interp primitive M))
| .app M N =>
  applyComp (Q := Q) (D_0 := D_0) (j_0 := j_0)
    (interp primitive M) (interp primitive N)
| .prim p => ScottMap.const (primitive p)
| .recLam self arg M =>
  (semanticUnit (Q := Q) (D_0 := D_0) (j_0 := j_0)).comp
  (recLambdaValue (Q := Q) (D_0 := D_0) (j_0 := j_0) self arg
    (interp primitive M))
| .prob p M N =>
  (HasComputationChoice.prob p).comp <|
  ScottMap.pairMap (interp primitive M) (interp primitive N)
| .intern M N =>
  HasComputationChoice.intern.comp <|
  ScottMap.pairMap (interp primitive M) (interp primitive N)
| .extern M N =>
  HasComputationChoice.extern.comp <|
  ScottMap.pairMap (interp primitive M) (interp primitive N)

/-- A value denotes the pure recursive-domain element before `unit`
lifts it into `Q(D inf)`. -/
noncomputable def valueInterp {Prim : Type}
  (primitive : Prim -> SemanticComp Q D_0 j_0)
  (M : Term Prim) :
  ScottMap (Env (SemanticValue Q D_0 j_0)) (SemanticValue Q D_0 j_0) :=
match M with
| .lam x body =>
  lambdaValue (Q := Q) (D_0 := D_0) (j_0 := j_0) x
    (interp primitive body)
| .recLam self arg body =>
  recLambdaValue (Q := Q) (D_0 := D_0) (j_0 := j_0) self arg
    (interp primitive body)
| _ => False

/-- Value terms are exactly the pure cases of the computation
interpretation. -/
theorem interp_value {Prim : Type}
  (primitive : Prim -> SemanticComp Q D_0 j_0)
  {M : Term Prim} (hM : Value M) :
  interp (Q := Q) (D_0 := D_0) (j_0 := j_0) primitive M =

```

```

      (semanticUnit (Q := Q) (D_0 := D_0) (j_0 := j_0)).comp
      (valueInterp (Q := Q) (D_0 := D_0) (j_0 := j_0) primitive M) := by
rcases hM with (_ | _)
* rfl
* rfl

/-- Compositional Scott continuity in the environment is carried by the
type of the interpretation itself. -/
theorem interp_continuous {Prim : Type}
  (primitive : Prim -> SemanticComp Q D_0 j_0) (M : Term Prim) :
  @Continuous
    (Env (SemanticValue Q D_0 j_0)) (SemanticComp Q D_0 j_0)
    scottTopologicalSpace scottTopologicalSpace
    (interp (Q := Q) (D_0 := D_0) (j_0 := j_0) primitive M) :=
  (interp (Q := Q) (D_0 := D_0) (j_0 := j_0) primitive M).continuous

@[simp]
theorem interp_var_apply {Prim : Type}
  (primitive : Prim -> SemanticComp Q D_0 j_0) (x : Name)
  (? : Env (SemanticValue Q D_0 j_0)) :
  interp (Q := Q) (D_0 := D_0) (j_0 := j_0) primitive (.var x) ? =
  semanticUnit (Q := Q) (D_0 := D_0) (j_0 := j_0) (? x) :=
  rfl

@[simp]
theorem interp_prim_apply {Prim : Type}
  (primitive : Prim -> SemanticComp Q D_0 j_0) (p : Prim)
  (? : Env (SemanticValue Q D_0 j_0)) :
  interp (Q := Q) (D_0 := D_0) (j_0 := j_0) primitive (.prim p) ? =
  primitive p :=
  rfl

@[simp]
theorem interp_lam_apply {Prim : Type}
  (primitive : Prim -> SemanticComp Q D_0 j_0) (x : Name) (M : Term Prim)
  (? : Env (SemanticValue Q D_0 j_0)) :
  interp (Q := Q) (D_0 := D_0) (j_0 := j_0) primitive (.lam x M) ? =
  semanticUnit (Q := Q) (D_0 := D_0) (j_0 := j_0)
    (lambdaValue (Q := Q) (D_0 := D_0) (j_0 := j_0) x
      (interp primitive M) ?) :=
  rfl

@[simp]
theorem interp_app_apply {Prim : Type}
  (primitive : Prim -> SemanticComp Q D_0 j_0) (M N : Term Prim)
  (? : Env (SemanticValue Q D_0 j_0)) :
  interp (Q := Q) (D_0 := D_0) (j_0 := j_0) primitive (.app M N) ? =
  applyComp (Q := Q) (D_0 := D_0) (j_0 := j_0)
    (interp primitive M) (interp primitive N) ? :=
  rfl

@[simp]
theorem interp_recLam_apply {Prim : Type}
  (primitive : Prim -> SemanticComp Q D_0 j_0)
  (self arg : Name) (M : Term Prim)
  (? : Env (SemanticValue Q D_0 j_0)) :
  interp (Q := Q) (D_0 := D_0) (j_0 := j_0)
    primitive (.recLam self arg M) ? =
  semanticUnit (Q := Q) (D_0 := D_0) (j_0 := j_0)
    (recLambdaValue (Q := Q) (D_0 := D_0) (j_0 := j_0) self arg
      (interp primitive M) ?) :=
  rfl

```

```

@[simp]
theorem interp_prob_apply {Prim : Type}
  (primitive : Prim -> SemanticComp Q D_0 j_0)
  (p : Prob) (M N : Term Prim)
  (? : Env (SemanticValue Q D_0 j_0)) :
  interp (Q := Q) (D_0 := D_0) (j_0 := j_0)
    primitive (.prob p M N) ? =
    HasComputationChoice.prob p
      (interp primitive M ?, interp primitive N ?) :=
  rfl

@[simp]
theorem interp_intern_apply {Prim : Type}
  (primitive : Prim -> SemanticComp Q D_0 j_0)
  (M N : Term Prim) (? : Env (SemanticValue Q D_0 j_0)) :
  interp (Q := Q) (D_0 := D_0) (j_0 := j_0)
    primitive (.intern M N) ? =
    HasComputationChoice.intern
      (interp primitive M ?, interp primitive N ?) :=
  rfl

/-- Either internal-choice branch refines the combined computation, matching
the direction used by internal-step soundness. -/
theorem interp_le_intern_left {Prim : Type}
  (primitive : Prim -> SemanticComp Q D_0 j_0)
  (M N : Term Prim) (? : Env (SemanticValue Q D_0 j_0)) :
  interp (Q := Q) (D_0 := D_0) (j_0 := j_0) primitive M ? <=
    interp (Q := Q) (D_0 := D_0) (j_0 := j_0)
      primitive (.intern M N) ? := by
  rw [interp_intern_apply]
  exact HasComputationChoice.left_le_intern _ _

theorem interp_le_intern_right {Prim : Type}
  (primitive : Prim -> SemanticComp Q D_0 j_0)
  (M N : Term Prim) (? : Env (SemanticValue Q D_0 j_0)) :
  interp (Q := Q) (D_0 := D_0) (j_0 := j_0) primitive N ? <=
    interp (Q := Q) (D_0 := D_0) (j_0 := j_0)
      primitive (.intern M N) ? := by
  rw [interp_intern_apply]
  exact HasComputationChoice.right_le_intern _ _

@[simp]
theorem interp_extern_apply {Prim : Type}
  (primitive : Prim -> SemanticComp Q D_0 j_0)
  (M N : Term Prim) (? : Env (SemanticValue Q D_0 j_0)) :
  interp (Q := Q) (D_0 := D_0) (j_0 := j_0)
    primitive (.extern M N) ? =
    HasComputationChoice.extern
      (interp primitive M ?, interp primitive N ?) :=
  rfl

/-- A term depends only on the values assigned to its free variables. -/
theorem interp_congr_free {Prim : Type}
  (primitive : Prim -> SemanticComp Q D_0 j_0) :
  forall (M : Term Prim) (? sigma : Env (SemanticValue Q D_0 j_0)),
    (forall x, x in free M -> ? x = sigma x) ->
    interp (Q := Q) (D_0 := D_0) (j_0 := j_0) primitive M ? =
      interp (Q := Q) (D_0 := D_0) (j_0 := j_0) primitive M sigma
| .var x, ?, sigma, h => by
  rw [interp_var_apply, interp_var_apply, h x]
  simp [free]
| .lam x M, ?, sigma, h => by
  rw [interp_lam_apply, interp_lam_apply]

```



```

unfold lambdaValue
simp only [ScottMap.comp_apply]
have hf :
  scottLambda
    ((interp primitive M).comp
      (envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0) x)) ? =
    scottLambda
      ((interp primitive M).comp
        (envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0) x)) sigma := by
  apply ScottMap.ext
  intro d
  simp only [scottLambda_apply, ScottMap.comp_apply]
  apply interp_congr_free primitive M
  intro y hy
  by_cases hxy : y = x
  * subst y
  simp
  * rw [envUpdate_other hxy, envUpdate_other hxy]
  apply h y
  simp [free, hy, hxy]
  rw [hf]
| .app M N, ?, sigma, h => by
  rw [interp_app_apply, interp_app_apply, applyComp_apply, applyComp_apply]
  have hM := interp_congr_free primitive M ? sigma
    (fun x hx => h x (by simp [free, hx]))
  have hN := interp_congr_free primitive N ? sigma
    (fun x hx => h x (by simp [free, hx]))
  have hCont :
    applyContinuation (Q := Q) (D_0 := D_0) (j_0 := j_0)
      (interp primitive N) ? =
    applyContinuation (Q := Q) (D_0 := D_0) (j_0 := j_0)
      (interp primitive N) sigma := by
  apply ScottMap.ext
  intro f
  rw [applyContinuation_apply, applyContinuation_apply, hN]
  rw [hM, hCont]
| .prim p, ?, sigma, h => by
  rw [interp_prim_apply, interp_prim_apply]
| .recLam self arg M, ?, sigma, h => by
  rw [interp_recLam_apply, interp_recLam_apply]
  unfold recLambdaValue
  simp only [ScottMap.comp_apply, Proposition314.fixMap_apply]
  have hf :
    recFunctional (Q := Q) (D_0 := D_0) (j_0 := j_0)
      self arg (interp primitive M) ? =
    recFunctional (Q := Q) (D_0 := D_0) (j_0 := j_0)
      self arg (interp primitive M) sigma := by
  unfold recFunctional
  apply ScottMap.ext
  intro dself
  simp only [scottLambda_apply, ScottMap.comp_apply]
  apply congrArg
  apply ScottMap.ext
  intro darg
  simp only [scottLambda_apply, ScottMap.comp_apply,
    ScottMap.pairMap_apply, ScottMap.fstMap_apply,
    ScottMap.sndMap_apply]
  apply interp_congr_free primitive M
  intro y hy
  by_cases hys : y = self
  * subst y
  by_cases hsa : self = arg
  * subst arg

```

```

      simp
    * simp [envUpdate_apply, hsa]
  * by_cases hya : y = arg
  * subst y
  simp
  * rw [envUpdate_other hya, envUpdate_other hya,
    envUpdate_other hys, envUpdate_other hys]
  apply h y
  simp [free, hy, hys, hya]
  rw [hf]
| .prob p M N, ?, sigma, h => by
  rw [interp_prob_apply, interp_prob_apply]
  rw [interp_congr_free primitive M ? sigma (fun x hx => h x (by
    simp [free, hx])),
    interp_congr_free primitive N ? sigma (fun x hx => h x (by
    simp [free, hx]))]
| .intern M N, ?, sigma, h => by
  rw [interp_intern_apply, interp_intern_apply]
  rw [interp_congr_free primitive M ? sigma (fun x hx => h x (by
    simp [free, hx])),
    interp_congr_free primitive N ? sigma (fun x hx => h x (by
    simp [free, hx]))]
| .extern M N, ?, sigma, h => by
  rw [interp_extern_apply, interp_extern_apply]
  rw [interp_congr_free primitive M ? sigma (fun x hx => h x (by
    simp [free, hx])),
    interp_congr_free primitive N ? sigma (fun x hx => h x (by
    simp [free, hx]))]

```

Lean 4 source (lines 801–1200)

```

/-- The pure value extracted from a value term also depends only on its free
variables. -/
theorem valueInterp_congr_free {Prim : Type}
  (primitive : Prim -> SemanticComp Q D_0 j_0)
  {V : Term Prim} (hV : Value V)
  (? sigma : Env (SemanticValue Q D_0 j_0))
  (h : forall x, x in free V -> ? x = sigma x) :
  valueInterp (Q := Q) (D_0 := D_0) (j_0 := j_0) primitive V ? =
  valueInterp (Q := Q) (D_0 := D_0) (j_0 := j_0) primitive V sigma := by
cases hV with
| lam x M =>
  unfold valueInterp lambdaValue
  simp only [ScottMap.comp_apply]
  apply congrArg
  apply ScottMap.ext
  intro d
  simp only [scottLambda_apply, ScottMap.comp_apply]
  apply interp_congr_free primitive _
  intro y hy
  by_cases hyx : y = x
  * subst y
  simp
  * rw [envUpdate_other hyx, envUpdate_other hyx]
  apply h y
  simp [free, hy, hyx]
| recLam self arg M =>
  unfold valueInterp recLambdaValue
  simp only [ScottMap.comp_apply, Proposition314.fixMap_apply]
  congr 1
  unfold recFunctional
  apply ScottMap.ext
  intro dself

```

```

simp only [scottLambda_apply, ScottMap.comp_apply]
apply congrArg
apply ScottMap.ext
intro darg
simp only [scottLambda_apply, ScottMap.comp_apply,
  ScottMap.pairMap_apply, ScottMap.fstMap_apply,
  ScottMap.sndMap_apply]
apply interp_congr_free primitive _
intro y hy
by_cases hys : y = self
* subst y
  by_cases hsa : self = arg
  * subst arg
    simp
  * simp [envUpdate_apply, hsa]
* by_cases hya : y = arg
* subst y
  simp
* rw [envUpdate_other hya, envUpdate_other hya,
  envUpdate_other hys, envUpdate_other hys]
  apply h y
  simp [free, hy, hys, hya]

/-- Updating a variable absent from a term's free variables does not change
its denotation. -/
theorem interp_weakening {Prim : Type}
  (primitive : Prim -> SemanticComp Q D_0 j_0)
  (M : Term Prim) (? : Env (SemanticValue Q D_0 j_0))
  (x : Name) (d : SemanticValue Q D_0 j_0) (hx : x notin free M) :
  interp (Q := Q) (D_0 := D_0) (j_0 := j_0) primitive M
    (envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0) x (? , d)) =
    interp (Q := Q) (D_0 := D_0) (j_0 := j_0) primitive M ? := by
  apply interp_congr_free primitive M
  intro y hy
  apply envUpdate_other
  intro hyx
  subst y
  exact hx hy

/-- Renaming a free variable to a name fresh for the term is interpreted by
redirecting that variable's environment entry. -/
theorem interp_rename {Prim : Type}
  (primitive : Prim -> SemanticComp Q D_0 j_0) :
  forall (M : Term Prim) (x y : Name)
    (? : Env (SemanticValue Q D_0 j_0)), y notin names M ->
    interp (Q := Q) (D_0 := D_0) (j_0 := j_0) primitive
      (rename x y M) ? =
      interp (Q := Q) (D_0 := D_0) (j_0 := j_0) primitive M
        (envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0)
          x (? , ? y))
| .var z, x, y, ?, hy => by
  simp only [rename]
  by_cases hzx : z = x
  * subst z
    simp
  * simp [interp_var_apply, envUpdate_apply, hzx]
| .lam z M, x, y, ?, hy => by
  have hy' : y != z /\ y notin names M := by
    simp [names] using hy
  rcases hy' with <hyz, hyM>
  simp only [rename]
  by_cases hzx : z = x
  * subst z

```

```

simp only [if_pos]
apply interp_congr_free primitive (.lam x M)
intro w hw
have hw' : w in free M /\ w != x := by
  simp [free] using hw
rw [envUpdate_other hw'.2]
* simp only [if_neg hzx, interp_lam_apply]
unfold lambdaValue
simp only [ScottMap.comp_apply]
have hf :
  scottLambda
    ((interp primitive (rename x y M)).comp
     (envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0) z)) ? =
  scottLambda
    ((interp primitive M).comp
     (envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0) z))
    (envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0)
     x (?, ? y)) := by
  apply ScottMap.ext
  intro d
  simp only [scottLambda_apply, ScottMap.comp_apply]
  rw [interp_rename primitive M x y
    (envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0) z (?, d)) hyM]
  apply interp_congr_free primitive M
  intro w hw
  by_cases hwx : w = x
  * subst w
    simp [envUpdate_apply, Ne.symm hzx, hyz]
  * by_cases hwz : w = z
    * subst w
      simp [envUpdate_apply, hzx]
    * simp [envUpdate_apply, hwx, hwz, hyz]
  rw [hf]
| .app M N, x, y, ?, hy => by
  have hy' : y notin names M /\ y notin names N := by
    simp [names] using hy
  rcases hy' with <hyM, hyN>
  rw [show rename x y (.app M N) =
    .app (rename x y M) (rename x y N) from rfl,
    interp_app_apply, interp_app_apply, applyComp_apply, applyComp_apply]
  have hM := interp_rename primitive M x y ? hyM
  have hN := interp_rename primitive N x y ? hyN
  have hCont :
    applyContinuation (Q := Q) (D_0 := D_0) (j_0 := j_0)
      (interp primitive (rename x y N)) ? =
    applyContinuation (Q := Q) (D_0 := D_0) (j_0 := j_0)
      (interp primitive N)
      (envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0)
       x (?, ? y)) := by
    apply ScottMap.ext
  intro f
  rw [applyContinuation_apply, applyContinuation_apply, hN]
  rw [hM, hCont]
| .prim p, x, y, ?, hy => by
  rw [show rename x y (.prim p) = .prim p from rfl,
    interp_prim_apply, interp_prim_apply]
| .recLam self arg M, x, y, ?, hy => by
  have hy' : y != self /\ y != arg /\ y notin names M := by
    simp [names] using hy
  rcases hy' with <hys, haya, hyM>
  simp only [rename]
  by_cases hbound : self = x \/ arg = x
  * simp only [if_pos hbound]

```

```

apply interp_congr_free primitive (.recLam self arg M)
intro w hw
have hw' : w in free M /\ w != arg /\ w != self := by
  simpa [free] using hw
rcases hbound with hsx | hax
* subst x
  rw [envUpdate_other hw'.2.2]
* subst x
  rw [envUpdate_other hw'.2.1]
* simp only [if_neg hbound, interp_recLam_apply]
  unfold recLambdaValue
  simp only [ScottMap.comp_apply, Proposition314.fixMap_apply]
have hf :
  recFunctional (Q := Q) (D_0 := D_0) (j_0 := j_0)
    self arg (interp primitive (rename x y M)) ? =
  recFunctional (Q := Q) (D_0 := D_0) (j_0 := j_0)
    self arg (interp primitive M)
    (envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0)
      x (?, ? y)) := by
  unfold recFunctional
  apply ScottMap.ext
  intro dself
  simp only [scottLambda_apply, ScottMap.comp_apply]
  apply congrArg
  apply ScottMap.ext
  intro darg
  simp only [scottLambda_apply, ScottMap.comp_apply,
    ScottMap.pairMap_apply, ScottMap.fstMap_apply,
    ScottMap.sndMap_apply]
  rw [interp_rename primitive M x y
    (envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0) arg
      (envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0) self
        (?, dself), darg)) hyM]
  apply interp_congr_free primitive M
  intro w hw
  rcases not_or.mp hbound with <hsx, hax>
  by_cases hwx : w = x
  * subst w
    simp [envUpdate_apply, Ne.symm hsx, Ne.symm hax, hys, hya]
  * by_cases hws : w = self
    * subst w
      simp [envUpdate_apply, hsx]
    * by_cases hwa : w = arg
      * subst w
        simp [envUpdate_apply, hax]
      * simp [envUpdate_apply, hwx, hws, hwa, hys, hya]
  rw [hf]
| .prob p M N, x, y, ?, hy => by
  have hy' : y notin names M /\ y notin names N := by simpa [names] using hy
  rcases hy' with <hyM, hyN>
  rw [show rename x y (.prob p M N) =
    .prob p (rename x y M) (rename x y N) from rfl,
    interp_prob_apply, interp_prob_apply,
    interp_rename primitive M x y ? hyM,
    interp_rename primitive N x y ? hyN]
| .intern M N, x, y, ?, hy => by
  have hy' : y notin names M /\ y notin names N := by simpa [names] using hy
  rcases hy' with <hyM, hyN>
  rw [show rename x y (.intern M N) =
    .intern (rename x y M) (rename x y N) from rfl,
    interp_intern_apply, interp_intern_apply,
    interp_rename primitive M x y ? hyM,
    interp_rename primitive N x y ? hyN]

```

```

| .extern M N, x, y, ?, hy => by
  have hy' : y notin names M /\ y notin names N := by simpa [names] using hy
  rcases hy' with <hyM, hyN>
  rw [show rename x y (.extern M N) =
    .extern (rename x y M) (rename x y N) from rfl,
    interp_extern_apply, interp_extern_apply,
    interp_rename_primitive M x y ? hyM,
    interp_rename_primitive N x y ? hyN]

/-- Renaming a fun -binder and its formerly free body occurrences to a fresh
name is semantically a-invariant. -/
theorem interp_lam_alpha {Prim : Type}
  (primitive : Prim -> SemanticComp Q D_0 j_0)
  (M : Term Prim) (x y : Name)
  (? : Env (SemanticValue Q D_0 j_0)) (hy : y notin names M) :
  interp (Q := Q) (D_0 := D_0) (j_0 := j_0) primitive
    (.lam y (rename x y M)) ? =
    interp (Q := Q) (D_0 := D_0) (j_0 := j_0) primitive (.lam x M) ? := by
  rw [interp_lam_apply, interp_lam_apply]
  unfold lambdaValue
  simp only [ScottMap.comp_apply]
  have hf :
    scottLambda
      ((interp primitive (rename x y M)).comp
        (envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0) y)) ? =
    scottLambda
      ((interp primitive M).comp
        (envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0) x)) ? := by
  apply ScottMap.ext
  intro d
  simp only [scottLambda_apply, ScottMap.comp_apply]
  rw [interp_rename_primitive M x y
    (envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0) y (? , d)) hy]
  apply interp_congr_free primitive M
  intro w hw
  have hwy : w != y := by
    intro hwy
    subst w
    exact hy (mem_names_of_mem_free hw)
  by_cases hwx : w = x
  * subst w
    simp [envUpdate_apply]
  * simp [envUpdate_apply, hwx, hwy]
  rw [hf]

/-- Simultaneously renaming the coincident binders of a recursive
abstraction is semantically a-invariant. -/
theorem interp_recLam_alpha_same {Prim : Type}
  (primitive : Prim -> SemanticComp Q D_0 j_0)
  (M : Term Prim) (x y : Name)
  (? : Env (SemanticValue Q D_0 j_0)) (hy : y notin names M) :
  interp (Q := Q) (D_0 := D_0) (j_0 := j_0) primitive
    (.recLam y y (rename x y M)) ? =
    interp (Q := Q) (D_0 := D_0) (j_0 := j_0) primitive
      (.recLam x x M) ? := by
  rw [interp_recLam_apply, interp_recLam_apply]
  unfold recLambdaValue
  simp only [ScottMap.comp_apply, Proposition314.fixMap_apply]
  have hf :
    recFunctional (Q := Q) (D_0 := D_0) (j_0 := j_0) y y
      (interp primitive (rename x y M)) ? =
    recFunctional (Q := Q) (D_0 := D_0) (j_0 := j_0) x x
      (interp primitive M) ? := by

```

```

unfold recFunctional
apply ScottMap.ext
intro dself
simp only [scottLambda_apply, ScottMap.comp_apply]
apply congrArg
apply ScottMap.ext
intro darg
simp only [scottLambda_apply, ScottMap.comp_apply,
  ScottMap.pairMap_apply, ScottMap.fstMap_apply, ScottMap.sndMap_apply]
rw [interp_rename primitive M x y
  (envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0) y
    (envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0) y
      (? , dself), darg)) hy]
apply interp_congr_free primitive M
intro z hz
have hzy : z != y := by
  intro h
  subst z
  exact hy (mem_names_of_mem_free hz)
by_cases hzx : z = x
* subst z
  simp [envUpdate_apply, hzy]
* simp [envUpdate_apply, hzx, hzy]
rw [hf]

/-- Renaming the self binder of a recursive abstraction to a fresh name is
semantically a-invariant when the two recursive binders are distinct. -/
theorem interp_recLam_alpha_self {Prim : Type}
  (primitive : Prim -> SemanticComp Q D_0 j_0)
  (M : Term Prim) (self arg self' : Name)
  (? : Env (SemanticValue Q D_0 j_0))
  (hsa : self != arg) (hfresh : self' notin names M)
  (hne : self' != arg) :
  interp (Q := Q) (D_0 := D_0) (j_0 := j_0) primitive
    (.recLam self' arg (rename self self' M)) ? =
  interp (Q := Q) (D_0 := D_0) (j_0 := j_0) primitive
    (.recLam self arg M) ? := by
  rw [interp_recLam_apply, interp_recLam_apply]
  unfold recLambdaValue
  simp only [ScottMap.comp_apply, Proposition314.fixMap_apply]
  have hf :
    recFunctional (Q := Q) (D_0 := D_0) (j_0 := j_0) self' arg
      (interp primitive (rename self self' M)) ? =
    recFunctional (Q := Q) (D_0 := D_0) (j_0 := j_0) self arg
      (interp primitive M) ? := by
  unfold recFunctional
  apply ScottMap.ext
  intro dself
  simp only [scottLambda_apply, ScottMap.comp_apply]
  apply congrArg
  apply ScottMap.ext
  intro darg
  simp only [scottLambda_apply, ScottMap.comp_apply,
    ScottMap.pairMap_apply, ScottMap.fstMap_apply, ScottMap.sndMap_apply]
  rw [interp_rename primitive M self self'
    (envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0) arg
      (envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0) self'
        (? , dself), darg)) hfresh]
  apply interp_congr_free primitive M
  intro z hz
  have hzf : z != self' := by
    intro h
    subst z

```

```

    exact hfresh (mem_names_of_mem_free hz)
  by_cases hzs : z = self
  * subst z
    simp [envUpdate_apply, hsa, hne]
  * by_cases hza : z = arg
    * subst z
      simp [envUpdate_apply, hsa, Ne.symm hsa, hne]
    * simp [envUpdate_apply, hzs, hza, hzf, hne]
  rw [hf]

/-- Renaming the argument binder of a recursive abstraction to a fresh name
is semantically a-invariant when the two recursive binders are distinct. -/
theorem interp_recLam_alpha_arg {Prim : Type}
  (primitive : Prim → SemanticComp Q D_0 j_0)
  (M : Term Prim) (self arg arg' : Name)
  (? : Env (SemanticValue Q D_0 j_0))
  (hsa : self != arg) (hfresh : arg' notin names M)
  (hne : arg' != self) :
  interp (Q := Q) (D_0 := D_0) (j_0 := j_0) primitive
    (.recLam self arg' (rename arg arg' M)) ? =
    interp (Q := Q) (D_0 := D_0) (j_0 := j_0) primitive
      (.recLam self arg M) ? := by
  rw [interp_recLam_apply, interp_recLam_apply]
  unfold recLambdaValue
  simp only [ScottMap.comp_apply, Proposition314.fixMap_apply]
  have hf :
    recFunctional (Q := Q) (D_0 := D_0) (j_0 := j_0) self arg'
      (interp primitive (rename arg arg' M)) ? =
      recFunctional (Q := Q) (D_0 := D_0) (j_0 := j_0) self arg
        (interp primitive M) ? := by
  unfold recFunctional
  apply ScottMap.ext
  intro dself
  simp only [scottLambda_apply, ScottMap.comp_apply]
  apply congrArg
  apply ScottMap.ext
  intro darg
  simp only [scottLambda_apply, ScottMap.comp_apply,
    ScottMap.pairMap_apply, ScottMap.fstMap_apply, ScottMap.sndMap_apply]
  rw [interp_rename primitive M arg arg'
    (envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0) arg'
      (envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0) self
        (?, dself), darg)) hfresh]
  apply interp_congr_free primitive M
  intro z hz
  have hzf : z != arg' := by
    intro h
    subst z
    exact hfresh (mem_names_of_mem_free hz)
  by_cases hzs : z = self
  * subst z
    simp [envUpdate_apply, hsa, hne, Ne.symm hne]

```

Lean 4 source (lines 1201–1600)

```

  * by_cases hza : z = arg
  * subst z
    simp [envUpdate_apply, hsa, hne]
  * simp [envUpdate_apply, hzs, hza, hzf, hne]
  rw [hf]

```

/-- Value substitution is interpreted by an environment update when the
 term's binders are fresh for the substituted value. This is the
 capture-free core used by the general a-renaming proof. -/


```

theorem interp_subst_value_of_binders_fresh {Prim : Type}
  (primitive : Prim -> SemanticComp Q D_0 j_0)
  (x : Name) {V : Term Prim} (hV : Value V) :
  forall (M : Term Prim) (? : Env (SemanticValue Q D_0 j_0)),
    (forall z, z in names M -> z notin free V) ->
      interp (Q := Q) (D_0 := D_0) (j_0 := j_0) primitive (subst x V M) ? =
        interp (Q := Q) (D_0 := D_0) (j_0 := j_0) primitive M
          (envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0) x
            (? , valueInterp (Q := Q) (D_0 := D_0) (j_0 := j_0)
              primitive V ?))
| .var y, ?, hfresh => by
  by_cases hyx : y = x
  * subst y
    simpa [subst, interp_var_apply, envUpdate_apply] using
      congrArg (fun f :
        ScottMap (Env (SemanticValue Q D_0 j_0)) (SemanticComp Q D_0 j_0) =>
          f ?) (interp_value primitive hV)
  * simp [subst, interp_var_apply, envUpdate_apply, hyx]
| .lam y M, ?, hfresh => by
  have hyV : y notin free V := hfresh y (by simp [names])
  have hM : forall z, z in names M -> z notin free V := by
    intro z hz
    exact hfresh z (by simp [names, hz])
  by_cases hyx : y = x
  * subst y
    simp only [subst, if_pos]
    apply interp_congr_free primitive (.lam x M)
    intro z hz
    have hz' : z in free M /\ z != x := by simpa [free] using hz
    rw [envUpdate_other hz'.2]
  * simp only [subst, if_neg hyx, hyV, if_false, interp_lam_apply]
    unfold lambdaValue
    simp only [ScottMap.comp_apply]
    have hfun :
      scottLambda
        ((interp primitive (subst x V M)).comp
          (envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0) y)) ? =
      scottLambda
        ((interp primitive M).comp
          (envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0) y))
          (envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0) x
            (? , valueInterp (Q := Q) (D_0 := D_0) (j_0 := j_0)
              primitive V ?)) := by
    apply ScottMap.ext
    intro d
    simp only [scottLambda_apply, ScottMap.comp_apply]
    rw [interp_subst_value_of_binders_fresh primitive x hV M
      (envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0) y (? , d)) hM]
    have hval :
      valueInterp (Q := Q) (D_0 := D_0) (j_0 := j_0) primitive V
        (envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0) y (? , d)) =
      valueInterp (Q := Q) (D_0 := D_0) (j_0 := j_0)
        primitive V ? := by
    apply valueInterp_congr_free primitive hV
    intro z hz
    rw [envUpdate_other]
    intro hzy
    subst z
    exact hyV hz
    rw [hval]
    apply interp_congr_free primitive M
    intro z hz
    by_cases hzx : z = x

```

```

      * subst z
      simp [envUpdate_apply, Ne.symm hyx]
    * by_cases hzy : z = y
      * subst z
      simp [envUpdate_apply, hyx]
      * simp [envUpdate_apply, hzx, hzy]
    rw [hfun]
| .app M N, ?, hfresh => by
  have hM : forall z, z in names M -> z notin free V := by
    intro z hz
    exact hfresh z (by simp [names, hz])
  have hN : forall z, z in names N -> z notin free V := by
    intro z hz
    exact hfresh z (by simp [names, hz])
  rw [show subst x V (.app M N) = .app (subst x V M) (subst x V N)
    by simp [subst], interp_app_apply, interp_app_apply,
    applyComp_apply, applyComp_apply]
  have hiM := interp_subst_value_of_binders_fresh
    primitive x hV M ? hM
  have hiN := interp_subst_value_of_binders_fresh
    primitive x hV N ? hN
  have hCont :
    applyContinuation (Q := Q) (D_0 := D_0) (j_0 := j_0)
      (interp primitive (subst x V N)) ? =
    applyContinuation (Q := Q) (D_0 := D_0) (j_0 := j_0)
      (interp primitive N)
      (envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0) x
        (? , valueInterp (Q := Q) (D_0 := D_0) (j_0 := j_0)
          primitive V ?)) := by
  apply ScottMap.ext
  intro f
  rw [applyContinuation_apply, applyContinuation_apply, hiN]
  rw [hiM, hCont]
| .prim p, ?, hfresh => by
  rw [show subst x V (.prim p) = .prim p by simp [subst],
    interp_prim_apply, interp_prim_apply]
| .recLam self arg M, ?, hfresh => by
  have hsV : self notin free V := hfresh self (by simp [names])
  have haV : arg notin free V := hfresh arg (by simp [names])
  have hM : forall z, z in names M -> z notin free V := by
    intro z hz
    exact hfresh z (by simp [names, hz])
  by_cases hbound : self = x /\ arg = x
  * simp only [subst, if_pos hbound]
  apply interp_congr_free primitive (.recLam self arg M)
  intro z hz
  have hz' : z in free M /\ z != arg /\ z != self := by
    simp [free] using hz
  rcases hbound with hsx | hax
  * subst x
  rw [envUpdate_other hz'.2.2]
  * subst x
  rw [envUpdate_other hz'.2.1]
  * have hsx : self != x := (not_or.mp hbound).1
  have hax : arg != x := (not_or.mp hbound).2
  by_cases hsa : self = arg
  * have hsubst :
    subst x V (.recLam self arg M) =
    .recLam self arg (subst x V M) := by
    simp [subst, hax, hsa, haV]
  rw [hsubst, interp_recLam_apply, interp_recLam_apply]
  subst arg
  unfold recLambdaValue

```

```

simp only [ScottMap.comp_apply, Proposition314.fixMap_apply]
have hf :
  recFunctional (Q := Q) (D_0 := D_0) (j_0 := j_0) self self
    (interp primitive (subst x V M)) ? =
  recFunctional (Q := Q) (D_0 := D_0) (j_0 := j_0) self self
    (interp primitive M)
    (envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0) x
      (? , valueInterp (Q := Q) (D_0 := D_0) (j_0 := j_0)
        primitive V ?)) := by
  unfold recFunctional
  apply ScottMap.ext
  intro dself
  simp only [scottLambda_apply, ScottMap.comp_apply]
  apply congrArg
  apply ScottMap.ext
  intro darg
  simp only [scottLambda_apply, ScottMap.comp_apply,
    ScottMap.pairMap_apply, ScottMap.fstMap_apply,
    ScottMap.sndMap_apply]
  rw [interp_subst_value_of_binders_fresh primitive x hV M
    (envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0) self
      (envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0) self
        (? , dself), darg)) hM]
  have hval :
    valueInterp (Q := Q) (D_0 := D_0) (j_0 := j_0) primitive V
      (envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0) self
        (envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0) self
          (? , dself), darg)) =
    valueInterp (Q := Q) (D_0 := D_0) (j_0 := j_0)
      primitive V ? := by
  apply valueInterp_congr_free primitive hV
  intro z hz
  by_cases hzs : z = self
  * subst z
    exact (hsV hz).elim
  * simp [envUpdate_apply, hzs]
  rw [hval]
  apply interp_congr_free primitive M
  intro z hz
  rcases not_or.mp hbound with <hsx, _>
  by_cases hzx : z = x
  * subst z
    simp [envUpdate_apply, Ne.symm hsx]
  * by_cases hzs : z = self
    * subst z
      simp [envUpdate_apply, hsx]
    * simp [envUpdate_apply, hzx, hzs]
  rw [hf]
* have hsubst :
  subst x V (.recLam self arg M) =
    .recLam self arg (subst x V M) := by
  simp [subst, hsx, hax, hsa, hsV, haV]
  rw [hsubst, interp_recLam_apply, interp_recLam_apply]
  unfold recLambdaValue
  simp only [ScottMap.comp_apply, Proposition314.fixMap_apply]
  have hf :
    recFunctional (Q := Q) (D_0 := D_0) (j_0 := j_0) self arg
      (interp primitive (subst x V M)) ? =
    recFunctional (Q := Q) (D_0 := D_0) (j_0 := j_0) self arg
      (interp primitive M)
      (envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0) x
        (? , valueInterp (Q := Q) (D_0 := D_0) (j_0 := j_0)
          primitive V ?)) := by

```

```

    unfold recFunctional
    apply ScottMap.ext
    intro dself
    simp only [scottLambda_apply, ScottMap.comp_apply]
    apply congrArg
    apply ScottMap.ext
    intro darg
    simp only [scottLambda_apply, ScottMap.comp_apply,
      ScottMap.pairMap_apply, ScottMap.fstMap_apply,
      ScottMap.sndMap_apply]
    rw [interp_subst_value_of_binders_fresh primitive x hV M
      (envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0) arg
        (envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0) self
          (? , dself), darg)) hM]
    have hval :
      valueInterp (Q := Q) (D_0 := D_0) (j_0 := j_0) primitive V
        (envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0) arg
          (envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0) self
            (? , dself), darg)) =
      valueInterp (Q := Q) (D_0 := D_0) (j_0 := j_0)
        primitive V ? := by
    apply valueInterp_congr_free primitive hV
    intro z hz
    by_cases hza : z = arg
    * subst z
      exact (hV hz).elim
    * rw [envUpdate_other hza]
      by_cases hzs : z = self
    * subst z
      exact (hV hz).elim
    * rw [envUpdate_other hzs]
    rw [hval]
    rcases not_or.mp hbound with <hsx, hax>
    rw [envUpdate_comm (Q := Q) (D_0 := D_0) (j_0 := j_0)
      (Ne.symm hsx) ?
      (valueInterp (Q := Q) (D_0 := D_0) (j_0 := j_0)
        primitive V ?) dself]
    rw [envUpdate_comm (Q := Q) (D_0 := D_0) (j_0 := j_0)
      (Ne.symm hax)
      (envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0)
        self (? , dself))
      (valueInterp (Q := Q) (D_0 := D_0) (j_0 := j_0)
        primitive V ?) darg]
    rw [hf]
| .prob p M N, ?, hfresh => by
  have hM : forall z, z in names M -> z notin free V := by
    intro z hz; exact hfresh z (by simp [names, hz])
  have hN : forall z, z in names N -> z notin free V := by
    intro z hz; exact hfresh z (by simp [names, hz])
  rw [show subst x V (.prob p M N) =
    .prob p (subst x V M) (subst x V N) by simp [subst],
    interp_prob_apply, interp_prob_apply,
    interp_subst_value_of_binders_fresh primitive x hV M ? hM,
    interp_subst_value_of_binders_fresh primitive x hV N ? hN]
| .intern M N, ?, hfresh => by
  have hM : forall z, z in names M -> z notin free V := by
    intro z hz; exact hfresh z (by simp [names, hz])
  have hN : forall z, z in names N -> z notin free V := by
    intro z hz; exact hfresh z (by simp [names, hz])
  rw [show subst x V (.intern M N) =
    .intern (subst x V M) (subst x V N) by simp [subst],
    interp_intern_apply, interp_intern_apply,
    interp_subst_value_of_binders_fresh primitive x hV M ? hM,

```

```

      interp_subst_value_of_binders_fresh primitive x hV N ? hN]
| .extern M N, ?, hfresh => by
  have hM : forall z, z in names M -> z notin free V := by
    intro z hz; exact hfresh z (by simp [names, hz])
  have hN : forall z, z in names N -> z notin free V := by
    intro z hz; exact hfresh z (by simp [names, hz])
  rw [show subst x V (.extern M N) =
    .extern (subst x V M) (subst x V N) by simp [subst],
    interp_extern_apply, interp_extern_apply,
    interp_subst_value_of_binders_fresh primitive x hV M ? hM,
    interp_subst_value_of_binders_fresh primitive x hV N ? hN]

/-- Lift the substitution equation through a non-capturing lambda binder. -/
private theorem interp_subst_value_lam {Prim : Type}
  (primitive : Prim -> SemanticComp Q D_0 j_0)
  (x y : Name) {V M : Term Prim} (hV : Value V)
  (hyx : y != x) (hyV : y notin free V)
  (hbody : forall sigma : Env (SemanticValue Q D_0 j_0),
    interp (Q := Q) (D_0 := D_0) (j_0 := j_0) primitive (subst x V M) sigma =
    interp (Q := Q) (D_0 := D_0) (j_0 := j_0) primitive M
    (envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0) x
      (sigma, valueInterp (Q := Q) (D_0 := D_0) (j_0 := j_0)
        primitive V sigma))) :
  (? : Env (SemanticValue Q D_0 j_0)) :
  interp (Q := Q) (D_0 := D_0) (j_0 := j_0) primitive
    (.lam y (subst x V M)) ? =
  interp (Q := Q) (D_0 := D_0) (j_0 := j_0) primitive (.lam y M)
    (envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0) x
      (?, valueInterp (Q := Q) (D_0 := D_0) (j_0 := j_0)
        primitive V ?)) := by
  rw [interp_lam_apply, interp_lam_apply]
  unfold lambdaValue
  simp only [ScottMap.comp_apply]
  have hf :
    scottLambda ((interp primitive (subst x V M)).comp
      (envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0) y)) ? =
    scottLambda ((interp primitive M).comp
      (envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0) y))
      (envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0) x
        (?, valueInterp (Q := Q) (D_0 := D_0) (j_0 := j_0)
          primitive V ?)) := by
  apply ScottMap.ext
  intro d
  simp only [scottLambda_apply, ScottMap.comp_apply]
  rw [hbody]
  have hval :
    valueInterp (Q := Q) (D_0 := D_0) (j_0 := j_0) primitive V
      (envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0) y (?, d)) =
    valueInterp (Q := Q) (D_0 := D_0) (j_0 := j_0) primitive V ? := by
  apply valueInterp_congr_free primitive hV
  intro z hz
  rw [envUpdate_other]
  intro hzy
  subst z
  exact hyV hz
  rw [hval]
  apply interp_congr_free primitive M
  intro z hz
  by_cases hzx : z = x
  * subst z
    simp [envUpdate_apply, Ne.symm hyx]
  * by_cases hzy : z = y
    * subst z

```

```

      simp [envUpdate_apply, hyx]
      * simp [envUpdate_apply, hzx, hzy]
    rw [hf]

/-- Lift the substitution equation through recursive binders that do not
capture the substituted value. This includes coincident self/argument
binders. -/
private theorem interp_subst_value_recLam {Prim : Type}
  (primitive : Prim -> SemanticComp Q D_0 j_0)
  (x self arg : Name) {V M : Term Prim} (hV : Value V)
  (hsx : self != x) (hax : arg != x)
  (hsV : self notin free V) (haV : arg notin free V)
  (hbody : forall sigma : Env (SemanticValue Q D_0 j_0),
    interp (Q := Q) (D_0 := D_0) (j_0 := j_0) primitive (subst x V M) sigma =
      interp (Q := Q) (D_0 := D_0) (j_0 := j_0) primitive M
      (envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0) x
        (sigma, valueInterp (Q := Q) (D_0 := D_0) (j_0 := j_0)
          primitive V sigma)))
  (? : Env (SemanticValue Q D_0 j_0)) :
  interp (Q := Q) (D_0 := D_0) (j_0 := j_0) primitive
    (.recLam self arg (subst x V M)) ? =
  interp (Q := Q) (D_0 := D_0) (j_0 := j_0) primitive
    (.recLam self arg M)
    (envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0) x
      (?, valueInterp (Q := Q) (D_0 := D_0) (j_0 := j_0)
        primitive V ?)) := by
  rw [interp_recLam_apply, interp_recLam_apply]
  unfold recLambdaValue
  simp only [ScottMap.comp_apply, Proposition314.fixMap_apply]
  have hf :
    recFunctional (Q := Q) (D_0 := D_0) (j_0 := j_0) self arg
      (interp primitive (subst x V M)) ? =
    recFunctional (Q := Q) (D_0 := D_0) (j_0 := j_0) self arg
      (interp primitive M)
      (envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0) x
        (?, valueInterp (Q := Q) (D_0 := D_0) (j_0 := j_0)
          primitive V ?)) := by
  unfold recFunctional
  apply ScottMap.ext
  intro dself
  simp only [scottLambda_apply, ScottMap.comp_apply]
  apply congrArg
  apply ScottMap.ext
  intro darg
  simp only [scottLambda_apply, ScottMap.comp_apply,
    ScottMap.pairMap_apply, ScottMap.fstMap_apply, ScottMap.sndMap_apply]
  rw [hbody]
  have hval :
    valueInterp (Q := Q) (D_0 := D_0) (j_0 := j_0) primitive V
      (envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0) arg
        (envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0) self
          (?, dself), darg)) =
    valueInterp (Q := Q) (D_0 := D_0) (j_0 := j_0) primitive V ? := by
  apply valueInterp_congr_free primitive hV
  intro z hz
  by_cases hza : z = arg
  * subst z
    exact (haV hz).elim
  * rw [envUpdate_other hza]
    by_cases hzs : z = self
    * subst z
      exact (hsV hz).elim
    * rw [envUpdate_other hzs]

```

```

rw [hval]
apply interp_congr_free primitive M
intro z hz
by_cases hzx : z = x
* subst z
  simp [envUpdate_apply, Ne.symm hsx, Ne.symm hax]
* by_cases hza : z = arg
  * subst z
    simp [envUpdate_apply, hax]
  * by_cases hzs : z = self
    * subst z
      simp [envUpdate_apply, hsx, hza]
    * simp [envUpdate_apply, hzx, hza, hzs]

```

Lean 4 source (lines 1601–2000)

```

rw [hf]

set_option maxHeartbeats 1000000 in
/-- Capture-avoiding substitution of a value is interpreted by updating the
environment. The alpha-renaming performed by `subst` is handled
semantically, so no binder-freshness hypothesis is required. -/
theorem interp_subst_value {Prim : Type}
  (primitive : Prim -> SemanticComp Q D_0 j_0)
  (x : Name) {V : Term Prim} (hV : Value V)
  (M : Term Prim) (? : Env (SemanticValue Q D_0 j_0)) :
  interp (Q := Q) (D_0 := D_0) (j_0 := j_0) primitive (subst x V M) ? =
  interp (Q := Q) (D_0 := D_0) (j_0 := j_0) primitive M
    (envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0) x
      (? , valueInterp (Q := Q) (D_0 := D_0) (j_0 := j_0)
        primitive V ?)) := by
cases M with
| var y =>
  by_cases hyx : y = x
  * subst y
    simp [subst, interp_var_apply, envUpdate_apply] using
      congrArg (fun f :
        ScottMap (Env (SemanticValue Q D_0 j_0)) (SemanticComp Q D_0 j_0) =>
          f ?) (interp_value primitive hV)
  * simp [subst, interp_var_apply, envUpdate_apply, hyx]
| lam y M =>
  by_cases hyx : y = x
  * subst y
    simp only [subst, if_pos]
    apply interp_congr_free primitive (.lam x M)
    intro z hz
    have hz' : z in free M /\ z != x := by simp [free] using hz
    rw [envUpdate_other hz'.2]
  * by_cases hyV : y in free V
  * let avoid := y :: x :: free V ++ free M ++ names V ++ names M
    let y' := fresh avoid
    have hy' : y' notin avoid := by
      dsimp [y']
      exact fresh_not_mem avoid
    have hy'x : y' != x := by
      dsimp [y']
      apply fresh_ne_of_mem
      simp [avoid]
    have hy'V : y' notin free V := by
      dsimp [y']
      apply fresh_not_mem_of_subset
      intro z hz
      simp [avoid, hz]
    have hy'M : y' notin names M := by

```

```

    dsimp [y']
    apply fresh_not_mem_of_subset
    intro z hz
    simp [avoid, hz]
    have hrec : forall sigma : Env (SemanticValue Q D_0 j_0),
      interp (Q := Q) (D_0 := D_0) (j_0 := j_0) primitive
        (subst x V (rename y y' M)) sigma =
        interp (Q := Q) (D_0 := D_0) (j_0 := j_0) primitive
          (rename y y' M)
        (envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0) x
          (sigma, valueInterp (Q := Q) (D_0 := D_0) (j_0 := j_0)
            primitive V sigma)) := by
      intro sigma
      apply interp_subst_value primitive x hV
    have hlift := interp_subst_value_lam
      (Q := Q) (D_0 := D_0) (j_0 := j_0)
      primitive x y' hV hy'x hy'V hrec ?
    have halpha := interp_lam_alpha
      (Q := Q) (D_0 := D_0) (j_0 := j_0) primitive M y y'
      (envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0) x
        (?, valueInterp (Q := Q) (D_0 := D_0) (j_0 := j_0)
          primitive V ?)) hy'M
    simpa only [subst, if_neg hyx, if_pos hyV, avoid, y'] using
      hlift.trans halpha
    * simpa only [subst, if_neg hyx, if_neg hyV] using
      interp_subst_value_lam
      (Q := Q) (D_0 := D_0) (j_0 := j_0)
      primitive x y hV hyx hyV
      (fun sigma => interp_subst_value primitive x hV M sigma) ?
| app M N =>
  rw [show subst x V (.app M N) = .app (subst x V M) (subst x V N)
    by simp [subst], interp_app_apply, interp_app_apply,
    applyComp_apply, applyComp_apply]
  have hiM := interp_subst_value primitive x hV M ?
  have hiN := interp_subst_value primitive x hV N ?
  have hCont :
    applyContinuation (Q := Q) (D_0 := D_0) (j_0 := j_0)
      (interp primitive (subst x V N)) ? =
    applyContinuation (Q := Q) (D_0 := D_0) (j_0 := j_0)
      (interp primitive N)
      (envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0) x
        (?, valueInterp (Q := Q) (D_0 := D_0) (j_0 := j_0)
          primitive V ?)) := by
    apply ScottMap.ext
  intro f
  rw [applyContinuation_apply, applyContinuation_apply, hiN]
  rw [hiM, hCont]
| prim p =>
  rw [show subst x V (.prim p) = .prim p by simp [subst],
    interp_prim_apply, interp_prim_apply]
| recLam self arg M =>
  by_cases hbound : self = x \ / arg = x
  * simp only [subst, if_pos hbound]
  apply interp_congr_free primitive (.recLam self arg M)
  intro z hz
  have hz' : z in free M /\ z != arg /\ z != self := by
    simpa [free] using hz
  rcases hbound with hsx | hax
  * subst x
    rw [envUpdate_other hz'.2.2]
  * subst x
    rw [envUpdate_other hz'.2.1]
  * have hsx : self != x := (not_or.mp hbound).1

```



```

have hax : arg != x := (not_or.mp hbound).2
by_cases hsa : self = arg
* subst arg
  by_cases hsV : self in free V
  * let avoid := self :: x :: free V ++ free M ++ names V ++ names M
    let z := fresh avoid
    have hz : z notin avoid := by
      dsimp [z]
      exact fresh_not_mem avoid
    have hzx : z != x := by
      dsimp [z]
      apply fresh_ne_of_mem
      simp [avoid]
    have hzV : z notin free V := by
      dsimp [z]
      apply fresh_not_mem_of_subset
      intro w hw
      simp [avoid, hw]
    have hzM : z notin names M := by
      dsimp [z]
      apply fresh_not_mem_of_subset
      intro w hw
      simp [avoid, hw]
    have hrec : forall sigma : Env (SemanticValue Q D_0 j_0),
      interp (Q := Q) (D_0 := D_0) (j_0 := j_0) primitive
        (subst x V (rename self z M)) sigma =
        interp (Q := Q) (D_0 := D_0) (j_0 := j_0) primitive
          (rename self z M)
          (envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0) x
            (sigma, valueInterp (Q := Q) (D_0 := D_0) (j_0 := j_0)
              primitive V sigma)) := by
      intro sigma
      apply interp_subst_value primitive x hV
    have hlift := interp_subst_value_recLam
      (Q := Q) (D_0 := D_0) (j_0 := j_0)
      primitive x z z hV hzx hzx hzV hzV hrec ?
    have halpha := interp_recLam_alpha_same
      (Q := Q) (D_0 := D_0) (j_0 := j_0)
      primitive M self z
      (envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0) x
        (?, valueInterp (Q := Q) (D_0 := D_0) (j_0 := j_0)
          primitive V ?)) hzM
    simpa only [subst, if_neg hbound, if_pos, if_pos hsV,
      avoid, z] using hlift.trans halpha
  * simpa only [subst, if_neg hbound, if_pos, if_neg hsV] using
    interp_subst_value_recLam
      (Q := Q) (D_0 := D_0) (j_0 := j_0)
      primitive x self self hV hsx hsx hsV hsV
      (fun sigma => interp_subst_value primitive x hV M sigma) ?
* let avoid :=
  self :: arg :: x :: free V ++ free M ++ names V ++ names M
let self' := if self in free V then fresh avoid else self
let M' := if self' = self then M else rename self self' M
let avoid' := self' :: avoid ++ names M'
let arg' := if arg in free V then fresh avoid' else arg
let M'' := if arg' = arg then M' else rename arg arg' M'
have hs'x : self' != x := by
  dsimp [self']
  split
  * apply fresh_ne_of_mem
    simp [avoid]
  * exact hsx
have hs'V : self' notin free V := by

```

```

dsimp [self']
split
* apply fresh_not_mem_of_subset
  intro z hz
  simp [avoid, hz]
* assumption
have hs'a : self' != arg := by
  dsimp [self']
  split
  * apply fresh_ne_of_mem
    simp [avoid]
  * exact hsa
have ha'x : arg' != x := by
  dsimp [arg']
  split
  * apply fresh_ne_of_mem
    simp [avoid', avoid]
  * exact hax
have ha'V : arg' notin free V := by
  dsimp [arg']
  split
  * apply fresh_not_mem_of_subset
    intro z hz
    simp [avoid', avoid, hz]
  * assumption
have ha's : arg' != self' := by
  dsimp [arg']
  split
  * apply fresh_ne_of_mem
    simp [avoid']
  * exact Ne.symm hs'a
have hsize : termSize M'' = termSize M := by
  exact recLam_subst_body_termSize self arg x V M
have hdecr :
  termSize M'' < termSize (.recLam self arg M) := by
  rw [hsize]
  simp [termSize]
have hrec : forall sigma : Env (SemanticValue Q D_0 j_0),
  interp (Q := Q) (D_0 := D_0) (j_0 := j_0) primitive
    (subst x V M'') sigma =
  interp (Q := Q) (D_0 := D_0) (j_0 := j_0) primitive M''
    (envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0) x
      (sigma, valueInterp (Q := Q) (D_0 := D_0) (j_0 := j_0)
        primitive V sigma)) := by
  intro sigma
  apply interp_subst_value primitive x hV
have hlift := interp_subst_value_recLam
  (Q := Q) (D_0 := D_0) (j_0 := j_0)
  primitive x self' arg' hV hs'x ha'x hs'V ha'V hrec ?
have halphaSelf : forall sigma,
  interp (Q := Q) (D_0 := D_0) (j_0 := j_0) primitive
    (.recLam self' arg M') sigma =
  interp (Q := Q) (D_0 := D_0) (j_0 := j_0) primitive
    (.recLam self arg M) sigma := by
  intro sigma
  by_cases hsV : self in free V
  * have hf : fresh avoid notin names M := by
    apply fresh_not_mem_of_subset
    intro z hz
    simp [avoid, hz]
    have hseq : self' = fresh avoid := by
      simp [self', hsV]
    have hne : fresh avoid != self :=

```

```

    fresh_ne_of_mem (by simp [avoid])
  have hM'eq : M' = rename self (fresh avoid) M := by
    simp [M', hs'eq, hne]
  rw [hs'eq, hM'eq]
  exact interp_reclam_alpha_self
    (Q := Q) (D_0 := D_0) (j_0 := j_0)
    primitive M self arg (fresh avoid) sigma hsa hf
    (fresh_ne_of_mem (by simp [avoid]))
  * simp [self', M', hsV]
  have halphaArg : forall sigma,
    interp (Q := Q) (D_0 := D_0) (j_0 := j_0) primitive
      (.recLam self' arg' M'') sigma =
    interp (Q := Q) (D_0 := D_0) (j_0 := j_0) primitive
      (.recLam self' arg M') sigma := by
    intro sigma
  by_cases haV : arg in free V
  * have hf : fresh avoid' notin names M' := by
    apply fresh_not_mem_of_subset
    intro z hz
    simp [avoid', hz]
  have ha'eq : arg' = fresh avoid' := by
    simp [arg', haV]
  have hne : fresh avoid' != arg :=
    fresh_ne_of_mem (by simp [avoid', avoid])
  have hM''eq : M'' = rename arg (fresh avoid') M' := by
    simp [M'', ha'eq, hne]
  rw [ha'eq, hM''eq]
  exact interp_reclam_alpha_arg
    (Q := Q) (D_0 := D_0) (j_0 := j_0)
    primitive M' self' arg (fresh avoid') sigma hs'a hf
    (fresh_ne_of_mem (by simp [avoid']))
  * simp [arg', M'', haV]
  have halpha := (halphaArg
    (envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0) x
      (?, valueInterp (Q := Q) (D_0 := D_0) (j_0 := j_0)
        primitive V ?))) .trans
    (halphaSelf
      (envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0) x
        (?, valueInterp (Q := Q) (D_0 := D_0) (j_0 := j_0)
          primitive V ?)))
  have hsubst :
    subst x V (.recLam self arg M) =
    .recLam self' arg' (subst x V M'') := by
    simp only [subst, if_neg hbound, if_neg hsa]
  rfl
  rw [hsubst]
  exact hlift.trans halpha
| prob p M N =>
  rw [show subst x V (.prob p M N) =
    .prob p (subst x V M) (subst x V N) by simp [subst],
    interp_prob_apply, interp_prob_apply,
    interp_subst_value primitive x hV M ?,
    interp_subst_value primitive x hV N ?]
| intern M N =>
  rw [show subst x V (.intern M N) =
    .intern (subst x V M) (subst x V N) by simp [subst],
    interp_intern_apply, interp_intern_apply,
    interp_subst_value primitive x hV M ?,
    interp_subst_value primitive x hV N ?]
| extern M N =>
  rw [show subst x V (.extern M N) =
    .extern (subst x V M) (subst x V N) by simp [subst],
    interp_extern_apply, interp_extern_apply,

```

```

        interp_subst_value primitive x hV M ?,
        interp_subst_value primitive x hV N ?]
termination_by termSize M
decreasing_by
  all_goals first | assumption | omega | simp_all [termSize, rename_termSize]

/-- b-soundness under the explicit binder-freshness condition required by
the capture-free substitution core. -/
theorem interp_beta_of_binders_fresh {Prim : Type}
  (primitive : Prim -> SemanticComp Q D_0 j_0)
  (x : Name) (M V : Term Prim) (hV : Value V)
  (? : Env (SemanticValue Q D_0 j_0))
  (hfresh : forall z, z in names M -> z notin free V) :
  interp (Q := Q) (D_0 := D_0) (j_0 := j_0) primitive
    (.app (.lam x M) V) ? =
    interp (Q := Q) (D_0 := D_0) (j_0 := j_0) primitive
      (subst x V M) ? := by
rw [interp_app_apply,
  interp_value primitive (Value.lam x M),
  interp_value primitive hV]
change
  applyComp (Q := Q) (D_0 := D_0) (j_0 := j_0)
    ((semanticUnit (Q := Q) (D_0 := D_0) (j_0 := j_0)).comp
      (lambdaValue (Q := Q) (D_0 := D_0) (j_0 := j_0)
        x (interp primitive M)))
    ((semanticUnit (Q := Q) (D_0 := D_0) (j_0 := j_0)).comp
      (valueInterp primitive V)) ? =
    interp primitive (subst x V M) ?
rw [applyComp_pure_lambda]
exact (interp_subst_value_of_binders_fresh
  primitive x hV M ? hfresh).symm

/-- General semantic b-equation. Capture-avoiding substitution performs any
required alpha-renaming automatically. -/
theorem interp_beta {Prim : Type}
  (primitive : Prim -> SemanticComp Q D_0 j_0)
  (x : Name) (M V : Term Prim) (hV : Value V)
  (? : Env (SemanticValue Q D_0 j_0)) :
  interp (Q := Q) (D_0 := D_0) (j_0 := j_0) primitive
    (.app (.lam x M) V) ? =
    interp (Q := Q) (D_0 := D_0) (j_0 := j_0) primitive
      (subst x V M) ? := by
rw [interp_app_apply,
  interp_value primitive (Value.lam x M),
  interp_value primitive hV]
change
  applyComp (Q := Q) (D_0 := D_0) (j_0 := j_0)
    ((semanticUnit (Q := Q) (D_0 := D_0) (j_0 := j_0)).comp
      (lambdaValue (Q := Q) (D_0 := D_0) (j_0 := j_0)
        x (interp primitive M)))
    ((semanticUnit (Q := Q) (D_0 := D_0) (j_0 := j_0)).comp
      (valueInterp primitive V)) ? =
    interp primitive (subst x V M) ?
rw [applyComp_pure_lambda]
exact (interp_subst_value primitive x hV M ?).symm

/-- General semantic recursive b-equation. The recursive abstraction is
installed at `self`, the pure argument at `arg`, and the distinct updates are
commuted to match the operational substitution order. -/
theorem interp_rec_beta {Prim : Type}
  (primitive : Prim -> SemanticComp Q D_0 j_0)
  (self arg : Name) (M V : Term Prim)
  (hne : self != arg) (hV : Value V)

```

```

    (? : Env (SemanticValue Q D_0 j_0)) :
    interp (Q := Q) (D_0 := D_0) (j_0 := j_0) primitive
      (.app (.recLam self arg M) V) ? =
      interp (Q := Q) (D_0 := D_0) (j_0 := j_0) primitive
        (subst arg V (subst self (.recLam self arg M) M)) ? := by
rw [interp_app_apply,
  interp_value primitive (Value.recLam self arg M),
  interp_value primitive hV]
change
  applyComp (Q := Q) (D_0 := D_0) (j_0 := j_0)
    ((semanticUnit (Q := Q) (D_0 := D_0) (j_0 := j_0)).comp
      (recLambdaValue (Q := Q) (D_0 := D_0) (j_0 := j_0)
        self arg (interp primitive M)))
    ((semanticUnit (Q := Q) (D_0 := D_0) (j_0 := j_0)).comp
      (valueInterp primitive V)) ? =
  interp primitive
    (subst arg V (subst self (.recLam self arg M) M)) ?
rw [applyComp_pure_recLambda]
rw [interp_subst_value primitive arg hV]
rw [interp_subst_value primitive self (Value.recLam self arg M)]
have hrec :
  valueInterp (Q := Q) (D_0 := D_0) (j_0 := j_0) primitive
    (.recLam self arg M)
    (envUpdate (Q := Q) (D_0 := D_0) (j_0 := j_0) arg
      (? , valueInterp (Q := Q) (D_0 := D_0) (j_0 := j_0)
        primitive V ?)) =
  recLambdaValue (Q := Q) (D_0 := D_0) (j_0 := j_0)
    self arg (interp primitive M) ? := by
  apply valueInterp_congr_free primitive (Value.recLam self arg M)
  intro x hx
  rw [envUpdate_other]
  intro hxa
  subst x
  simp [free] at hx
rw [hrec]
rw [envUpdate_comm (Q := Q) (D_0 := D_0) (j_0 := j_0)
  (Ne.symm hne) ?

```

Lean 4 source (lines 2001–2007)

```

  (valueInterp (Q := Q) (D_0 := D_0) (j_0 := j_0) primitive V ?)
  (recLambdaValue (Q := Q) (D_0 := D_0) (j_0 := j_0)
    self arg (interp primitive M) ?)]

end Semantics

end QLambda

```

A.34 QLambda/Monad.lean

65 lines.

Lean 4 source

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/
import QLambda.QuantumPower

/-!
# Quantum computation as a lawful monad (LNL)

```

Paper S5. Selinger-Valiron treat quantum computation as a monad on a linear-nonlinear layer. `IsQuantumPowerModel` is only an endofunctor spec. This chapter records the additional operations and laws needed for a computation-valued interpretation. Concrete instances are supplied by later modules, notably `QLambda.TTContinuationMonad`.

```

-/
namespace QLambda

open Scott1972.ContinuousLattice

universe u

/-- A locally continuous quantum computation model with lawful Kleisli extension. -/
class IsQuantumMonad (Q : (D : Type u) -> [CompleteLattice D] -> Type u)
  extends IsQuantumPowerModel Q where
  unit : forall {D : Type u} [CompleteLattice D],
    letI := str D
    ScottMap D (Q D)
  bind : forall {D E : Type u} [CompleteLattice D] [CompleteLattice E],
    letI := str D
    letI := str E
    ScottMap (ScottMap D (Q E)) (ScottMap (Q D) (Q E))
  bind_unit : forall {D : Type u} [CompleteLattice D],
    letI := str D
    bind (unit (D := D)) = ScottMap.idMap
  unit_bind : forall {D E : Type u} [CompleteLattice D] [CompleteLattice E]
    (f : letI := str E; ScottMap D (Q E)),
    letI := str D
    letI := str E
    (bind f).comp unit = f
  bind_assoc : forall {D E F : Type u}
    [CompleteLattice D] [CompleteLattice E] [CompleteLattice F]
    (f : letI := str E; ScottMap D (Q E))
    (g : letI := str F; ScottMap E (Q F)),
    letI := str D
    letI := str E
    letI := str F
    (bind g).comp (bind f) = bind ((bind g).comp f)
  map_eq_bind_unit : forall {D E : Type u} [CompleteLattice D] [CompleteLattice E]
    (f : ScottMap D E),
    letI := str D
    letI := str E
    map f = bind (unit.comp f)

/-- Regard a quantum monad as its underlying bundled quantum power model.
Using this constructor keeps the power-model and monad structures
definitionally aligned in computation-valued semantics. -/
noncomputable abbrev quantumMonadModel
  (Q : (D : Type u) -> [CompleteLattice D] -> Type u)
  [m : IsQuantumMonad Q] : QuantumPowerModel where
  Power := Q
  spec := m.toIsQuantumPowerModel

end QLambda

```

A.35 QLambda/ObservationBasis.lean

960 lines.

[Lean 4 source \(lines 1–400\)](#)

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/
import QLambda.InstrumentPower
import QLambda.RationalComplex

/-!
# Rational Choi/output observations

A finite quantum observation asks whether a strict rational lower bound
holds for a quadratic form of the Choi matrix accumulated over a
Scott-open set of returned values. Rational vectors and thresholds are
countable. Output observations are universal for arbitrary complete
lattices and separately admit countable coded subfamilies.
-/

open Matrix
open scoped ComplexOrder MatrixOrder

namespace QLambda

open Scott1972.ContinuousLattice

universe u v

/-- A nonnegative rational threshold. -/
abbrev NonnegRat := {q : ? // 0 <= q}

/-- A countable quadratic Choi test: a Gaussian-rational vector and a
strict nonnegative rational threshold. -/
abbrev ChoiTest (n : Nat) :=
  RatChoiVec n x NonnegRat

instance (n : Nat) : Countable (ChoiTest n) :=
  inferInstance

namespace ChoiTest

def vector {n : Nat} (t : ChoiTest n) : Fin n x Fin n -> ? :=
  t.1.toComplex

def threshold {n : Nat} (t : ChoiTest n) : ? :=
  t.2.1

/-- Real part of the quadratic form `v? J v`. -/
noncomputable def eval {n : Nat} (t : ChoiTest n)
  (J : Matrix (Fin n x Fin n) (Fin n x Fin n) ?) : ? :=
  RCLike.re (star t.vector ?? (J *? t.vector))

theorem eval_nonneg {n : Nat} (t : ChoiTest n)
  {J : Matrix (Fin n x Fin n) (Fin n x Fin n) ?}
  (hJ : J.PosSemidef) : 0 <= t.eval J :=
  hJ.re_dotProduct_nonneg t.vector

theorem eval_sub {n : Nat} (t : ChoiTest n)
  (J K : Matrix (Fin n x Fin n) (Fin n x Fin n) ?) :
  t.eval (K - J) = t.eval K - t.eval J := by
  simp [eval, Matrix.sub_mulVec, dotProduct_sub]

theorem eval_mono {n : Nat} (t : ChoiTest n)
  {J K : Matrix (Fin n x Fin n) (Fin n x Fin n) ?}

```

```

    (hJK : J <= K) : t.eval J <= t.eval K := by
have hdiff : (K - J).PosSemidef := hJK
have hnonneg := t.eval_nonneg hdiff
rw [eval_sub] at hnonneg
linarith

/-- Continuity of a finite-dimensional Choi quadratic form in its
vector argument. -/
theorem continuous_quadratic {n : Nat}
  (J : Matrix (Fin n x Fin n) (Fin n x Fin n) ?) :
  Continuous (fun x : Fin n x Fin n -> ? =>
    (star x ?? (J *? x)).re) := by
  apply Complex.continuous_re.comp
  apply continuous_finsetSum Finset.univ
  intro i hi
  apply (continuous_apply i).star.mul
  apply continuous_finsetSum Finset.univ
  intro j hj
  exact continuous_const.mul (continuous_apply j)

/-- Inequalities on Gaussian-rational vectors extend to all complex
vectors by density and continuity. -/
theorem all_quadratic_le_of_rational {n : Nat}
  (J K : Matrix (Fin n x Fin n) (Fin n x Fin n) ?)
  (h : forall v : RatChoiVec n,
    eval (v, <0, le_rfl>) J <= eval (v, <0, le_rfl>) K) :
  forall x : Fin n x Fin n -> ?,
    (star x ?? (J *? x)).re <=
      (star x ?? (K *? x)).re := by
  let f : (Fin n x Fin n -> RatComplex) ->
    (Fin n x Fin n -> ?) :=
    Pi.map fun _ => RatComplex.toComplex
  have hf : DenseRange f :=
    DenseRange.piMap fun _ => RatComplex.denseRange_toComplex
  intro x
  refine DenseRange.induction_on (p := fun y =>
    (star y ?? (J *? y)).re <= (star y ?? (K *? y)).re)
  hf x (isClosed_le (continuous_quadratic J) (continuous_quadratic K)) ?_
  intro q
  let v : RatChoiVec n := fun k => q (finProdFinEquiv.symm k)
  have hv : v.toComplex = f q := by
    funext i
    change (q (finProdFinEquiv.symm (finProdFinEquiv i))).toComplex =
      (q i).toComplex
    rw [Equiv.symm_apply_apply]
  simpa [eval, vector, hv] using h v

theorem hermitian_quadratic_star {m : Type*} [Fintype m] [DecidableEq m]
  (A : Matrix m m ?) (hA : A.IsHermitian) (x : m -> ?) :
  star (star x ?? (A *? x)) = star x ?? (A *? x) := by
  change (starRingEnd ?) (? i, star (x i) * ? j, A i j * x j) =
    ? i, star (x i) * ? j, A i j * x j
  rw [map_sum]
  calc
  (? i, (starRingEnd ?) (star (x i) * ? j, A i j * x j)) =
    ? i, ? j, x i * star (A i j) * star (x j) := by
  apply Finset.sum_congr rfl
  intro i hi
  rw [map_mul]
  have hss : (starRingEnd ?) (star (x i)) = x i := star_star (x i)
  rw [hss, map_sum, Finset.mul_sum]
  apply Finset.sum_congr rfl
  intro j hj

```



```

    rw [map_mul]
    change x i * (star (A i j) * star (x j)) = _
    ring
    = ? i, ? j, star (x i) * A i j * x j := by
    rw [Finset.sum_comm]
    apply Finset.sum_congr rfl
    intro i hi
    apply Finset.sum_congr rfl
    intro j hj
    rw [hA.apply]
    ring
    = ? i, star (x i) * ? j, A i j * x j := by
    apply Finset.sum_congr rfl
    intro i hi
    rw [Finset.mul_sum]
    apply Finset.sum_congr rfl
    intro j hj
    ring

theorem posSemidef_of_re_quadratic_nonneg {m : Type*}
  [Fintype m] [DecidableEq m]
  (A : Matrix m m ?) (hA : A.IsHermitian)
  (h : forall x : m -> ?, 0 <= (star x ?? (A *? x)).re) :
  A.PosSemidef := by
  apply Matrix.PosSemidef.of_dotProduct_mulVec_nonneg hA
  intro x
  rw [Complex.nonneg_iff]
  constructor
  * exact h x
  * have hs := hermitian_quadratic_star A hA x
    have him := congrArg Complex.im hs
    rw [RCLike.star_def, Complex.conj_im] at him
    linarith

/-- Gaussian-rational quadratic inequalities characterize Loewner order
on Hermitian matrices. -/
theorem le_of_rational_quadratic_le {n : Nat}
  {J K : Matrix (Fin n x Fin n) (Fin n x Fin n) ?}
  (hJ : J.IsHermitian) (hK : K.IsHermitian)
  (h : forall v : RatChoiVec n,
    eval (v, <0, le_rfl>) J <= eval (v, <0, le_rfl>) K) :
  J <= K := by
  rw [Matrix.le_iff]
  apply posSemidef_of_re_quadratic_nonneg (K - J) (hK.sub hJ)
  intro x
  have hx := all_quadratic_le_of_rational J K h x
  simpa [Matrix.sub_mulVec, dotProduct_sub] using sub_nonneg.mpr hx

end ChoiTest

/-- A Scott-open observation of returned values. It is intentionally
not required to be countable: the quantum power construction is defined
on every complete lattice, while countability is a closure theorem for
`?QVA` inputs. -/
structure OutputObservation (D : Type u) [CompleteLattice D] where
  carrier : Set D
  isScottOpen : ScottOpen carrier

namespace OutputObservation

instance {D : Type u} [CompleteLattice D] : SetLike (OutputObservation D) D where
  coe U := U.carrier
  coe_injective U V h := by

```

```

    cases U
    cases V
    simp only [mk.injEq]
    exact h

@[simp] theorem mem_carrier {D : Type u} [CompleteLattice D]
  (U : OutputObservation D) (d : D) :
  d in U.carrier <-> d in U :=
  Iff.rfl

def univ (D : Type u) [CompleteLattice D] : OutputObservation D :=
  <Set.univ, scottOpen_univ>

def empty (D : Type u) [CompleteLattice D] : OutputObservation D :=
  <{}, by
    constructor
    * intro a b hab ha
      exact False.elim ha
    * intro S hS hdir hmem
      exact False.elim hmem>

@[simp]
theorem not_mem_empty {D : Type u} [CompleteLattice D] (d : D) :
  d notin empty D :=
  id

def inter {D : Type u} [CompleteLattice D]
  (U V : OutputObservation D) : OutputObservation D :=
  <U I V, scottOpen_inter U.isScottOpen V.isScottOpen>

def union {D : Type u} [CompleteLattice D]
  (U V : OutputObservation D) : OutputObservation D :=
  <U U V, by
    constructor
    * intro a b hab ha
      rcases ha with ha | ha
      * exact Or.inl (U.isScottOpen.1 hab ha)
      * exact Or.inr (V.isScottOpen.1 hab ha)
    * intro S hS hdir hmem
      rcases hmem with hmem | hmem
      * obtain <s, hs, hsU> := U.isScottOpen.2 hS hdir hmem
        exact <s, hs, Or.inl hsU>
      * obtain <s, hs, hsV> := V.isScottOpen.2 hS hdir hmem
        exact <s, hs, Or.inr hsV>>

@[simp]
theorem mem_union {D : Type u} [CompleteLattice D]
  {d : D} {U V : OutputObservation D} :
  d in union U V <-> d in U \ / d in V :=
  Iff.rfl

/-- A finite union of Scott-open output observations. -/
def listUnion {D : Type u} [CompleteLattice D] :
  List (OutputObservation D) -> OutputObservation D
| [] => empty D
| U :: Us => union U (listUnion Us)

@[simp]
theorem mem_listUnion {D : Type u} [CompleteLattice D]
  {d : D} {Us : List (OutputObservation D)} :
  d in listUnion Us <-> exists U in Us, d in U := by
  induction Us with
  | nil => simp [listUnion]

```

```

| cons U Us ih =>
  simp [listUnion, ih]

/-- Pull an output observation back along a Scott map. -/
def preimage {D E : Type u} [CompleteLattice D] [CompleteLattice E]
  (f : ScottMap D E) (V : OutputObservation E) : OutputObservation D :=
  <f ⁻¹' V, scottOpen_preimage
    (fun S hS hdir => f.preservesDirectedSup_coe S hS hdir)
    V.isScottOpen>

end OutputObservation

/-- A countable family of Scott-open output observations. The index is
kept separate from `D`, so no encodability assumption is imposed on the
semantic domain itself. -/
structure OutputCode (? : Type v) (D : Type u) [CompleteLattice D] where
  observe : ? -> OutputObservation D

namespace OutputCode

/-- Close an output code under finite unions. Lists preserve
countability whenever the original code is countable. -/
def finiteUnion {? : Type v} {D : Type u} [CompleteLattice D]
  (C : OutputCode ? D) : OutputCode (List ?) D :=
  <fun is => OutputObservation.listUnion (is.map C.observe)>

@[simp]
theorem mem_finiteUnion {? : Type v} {D : Type u} [CompleteLattice D]
  (C : OutputCode ? D) {is : List ?} {d : D} :
  d in (finiteUnion C).observe is <-> exists i in is, d in C.observe i := by
  simp [finiteUnion, OutputObservation.mem_listUnion]

theorem finiteUnion_subset {? : Type v} {D : Type u} [CompleteLattice D]
  (C : OutputCode ? D) {is : List ?} {U : Set D}
  (h : forall i in is, (C.observe i : Set D) subseq U) :
  ((finiteUnion C).observe is : Set D) subseq U := by
  intro d hd
  change d in (finiteUnion C).observe is at hd
  rw [mem_finiteUnion] at hd
  obtain <i, hi, hdi> := hd
  exact h i hi hdi

end OutputCode

/-- A countable topological basis of output observations. This is the
interface required from an `?QVA` witness; it is deliberately separate
from the universal definition above. -/
structure CountableOutputBasis (D : Type u) [CompleteLattice D] where
  code : OutputCode Nat D
  cofinal : forall (U : OutputObservation D) ?d : D?, d in U ->
    exists i, d in code.observe i /\ (code.observe i : Set D) subseq U

namespace CountableOutputBasis

variable {D : Type u} [CompleteLattice D]

/-- Decode a natural number as a finite list of natural-number codes. -/
noncomputable def decodedList (k : Nat) : List Nat :=
  match Encodable.decode (a := List Nat) k with
  | some is => is
  | none => []

@[simp]

```

```

theorem decodedList_encode (is : List Nat) :
  decodedList (Encodable.encode is) = is := by
  rw [decodedList, Encodable.encodek]

/-- Close a countable output basis under finite unions while retaining a
natural-number code type. -/
noncomputable def finiteUnionClosure (B : CountableOutputBasis D) :
  CountableOutputBasis D where
  code := <fun k => (OutputCode.finiteUnion B.code).observe (decodedList k)>
  cofinal := by
    intro U d hd
    obtain <i, hdi, hiU> := B.cofinal U hd
    refine <Encodable.encode [i], ?_, ?_>
    * change d in (OutputCode.finiteUnion B.code).observe
      (decodedList (Encodable.encode [i]))
      rw [decodedList_encode, OutputCode.mem_finiteUnion]
      exact <i, by simp, hdi>
    * change ((OutputCode.finiteUnion B.code).observe
      (decodedList (Encodable.encode [i])) : Set D) subseq U
      rw [decodedList_encode]
      apply OutputCode.finiteUnion_subset
      intro j hj
      simp only [List.mem_singleton] at hj
      subst j
      exact hiU

private theorem exists_covering_codes (B : CountableOutputBasis D)
  (U : OutputObservation D) (xs : List D)
  (hxs : forall d in xs, d in U) :
  exists is : List Nat,
    (forall d in xs, exists i in is, d in B.code.observe i) /\
    (forall i in is, (B.code.observe i : Set D) subseq U) := by
  induction xs with
  | nil =>
    exact <[], by simp, by simp>
  | cons d ds ih =>
    obtain <i, hdi, hiU> := B.cofinal U (hxs d (by simp))
    obtain <is, hcover, hisU> :=
      ih (fun x hx => hxs x (by simp [hx]))
    refine <i :: is, ?_, ?_>
    * intro x hx
      rcases List.mem_cons.mp hx with rfl | hx
      * exact <i, by simp, hdi>
      * obtain <j, hj, hxj> := hcover x hx
        exact <j, by simp [hj], hxj>
    * intro j hj
      rcases List.mem_cons.mp hj with rfl | hj
      * exact hiU
      * exact hisU j hj

/-- A finite family of points in one Scott open is contained in one
coded finite-union neighbourhood lying inside that open. -/
theorem finiteUnionClosure_finite_cover (B : CountableOutputBasis D)
  (U : OutputObservation D) (xs : List D)
  (hxs : forall d in xs, d in U) :
  exists k, (forall d in xs, d in (finiteUnionClosure B).code.observe k) /\
    ((finiteUnionClosure B).code.observe k : Set D) subseq U := by
  obtain <is, hcover, hisU> := exists_covering_codes B U xs hxs
  refine <Encodable.encode is, ?_, ?_>
  * intro d hd
    change d in (OutputCode.finiteUnion B.code).observe
      (decodedList (Encodable.encode is))
    rw [decodedList_encode, OutputCode.mem_finiteUnion]

```

```

    exact hcover d hd
* change ((OutputCode.finiteUnion B.code).observe
  (decodedList (Encodable.encode is)) : Set D) subsesteq U
rw [decodedList_encode]
exact OutputCode.finiteUnion_subset B.code hisU

variable [IsOmegaQVA D]

/-- A chosen finite separator for the `n`th approximant. -/
noncomputable def omegaSeparator (n : Nat) : Finset D :=
  Classical.choose (IsOmegaQVA.separated (D := D) n)

theorem omegaSeparator_spec (n : Nat) (x : D) :
  exists m in omegaSeparator (D := D) n,
  (IsOmegaQVA.approx n : D -> D) x <= m /\ m <= x :=
  Classical.choose_spec (IsOmegaQVA.separated (D := D) n) x

/-- Indices for the CKL countable element basis. An index records an
approximant and an element of one of the chosen finite separators. -/
abbrev OmegaBasisIndex :=
  Sigma n : Nat, Nat x (omegaSeparator (D := D) n : Type u)

Lean 4 source (lines 401–800)

noncomputable instance : Encodable (OmegaBasisIndex (D := D)) := by
  unfold OmegaBasisIndex
  letI (n : Nat) : Encodable (omegaSeparator (D := D) n : Type u) :=
    Fintype.toEncodable _
  infer_instance

/-- The basis element coded by `(n,j,m)` is `approx j m`. -/
def OmegaBasisIndex.point (i : OmegaBasisIndex (D := D)) : D :=
  (IsOmegaQVA.approx i.2.1 : D -> D) i.2.2.1

/-- Every way-below pair is interpolated by a coded CKL basis element. -/
theorem exists_omegaBasisIndex {a x : D} (hax : a << x) :
  exists i : OmegaBasisIndex (D := D), a <= i.point /\ i.point << x := by
  have hx : x =
    sSup (Set.range fun n => (IsOmegaQVA.approx n : D -> D) x) := by
    rw [sSup_range]
  simp [scottMap_iSup_apply, ScottMap.idMap_apply] using
    (congrArg (fun f : ScottMap D D => (f : D -> D) x)
      (IsOmegaQVA.iSup_approx (D := D))).symm
  have hdirx : DirectedOn (* <= *)
    (Set.range fun n => (IsOmegaQVA.approx n : D -> D) x) :=
    directedOn_range.2 fun i j =>
      <max i j,
        IsOmegaQVA.monotone_approx (D := D) (le_max_left i j) x,
        IsOmegaQVA.monotone_approx (D := D) (le_max_right i j) x>
  rw [hx] at hax
  obtain <_, <n, rfl>, han> :=
    (wayBelow_sSup_iff (Set.range_nonempty _) hdirx).1 hax
  obtain <m, hm, hnxm, hmx> := omegaSeparator_spec (D := D) n x
  have ham : a << m := han.trans_le hnxm
  have hmSup : m =
    sSup (Set.range fun j => (IsOmegaQVA.approx j : D -> D) m) := by
    rw [sSup_range]
  simp [scottMap_iSup_apply, ScottMap.idMap_apply] using
    (congrArg (fun f : ScottMap D D => (f : D -> D) m)
      (IsOmegaQVA.iSup_approx (D := D))).symm
  have hdirx : DirectedOn (* <= *)
    (Set.range fun j => (IsOmegaQVA.approx j : D -> D) m) :=
    directedOn_range.2 fun i j =>
      <max i j,

```

```

      IsOmegaQVA.monotone_approx (D := D) (le_max_left i j) m,
      IsOmegaQVA.monotone_approx (D := D) (le_max_right i j) m>
rw [hmSup] at ham
obtain <_, <j, rfl>, haj> :=
  (wayBelow_sSup_iff (Set.range_nonempty _) hdim).1 ham
let i : OmegaBasisIndex (D := D) := <n, j, <m, hm>>
refine <i, haj.le, ?_>
exact (finitelySeparated_wayBelow IsOmegaQVA.isContinuousLattice
  (IsOmegaQVA.separated (D := D) j) m).trans_le hmx

/-- The standard Scott-open way-above neighbourhood of an element. -/
def wayAbove (a : D) : OutputObservation D :=
  <{x | a << x}, scottOpen_wayBelow a>

/-- Decode a natural number as a CKL basis element, using bottom for
unused codes. -/
noncomputable def decodedPoint (k : Nat) : D :=
  match Encodable.decode (a := OmegaBasisIndex (D := D)) k with
  | some i => i.point
  | none => False

@[simp]
theorem decodedPoint_encode (i : OmegaBasisIndex (D := D)) :
  decodedPoint (D := D) (Encodable.encode i) = i.point := by
  rw [decodedPoint, Encodable.encodek]

/-- The countable family of way-above opens generated by the CKL basis. -/
noncomputable def omegaCode : OutputCode Nat D :=
  <fun k => wayAbove (decodedPoint (D := D) k)>

/-- Every `?QVA` carries a countable basis for its Scott-open output
observations. -/
noncomputable def ofOmegaQVA : CountableOutputBasis D where
  code := omegaCode (D := D)
  cofinal := by
    intro U d hd
    obtain <a, had, haU> :=
      exists_wayBelow_Ici_subset IsOmegaQVA.isContinuousLattice
        U.isScottOpen hd
    obtain <i, hai, hid> := exists_omegaBasisIndex (D := D) had
    refine <Encodable.encode i, ?_, ?_>
    * change decodedPoint (D := D) (Encodable.encode i) << d
      rw [decodedPoint_encode]
      exact hid
    * intro x hx
      change decodedPoint (D := D) (Encodable.encode i) << x at hx
      rw [decodedPoint_encode] at hx
      apply haU
      exact Set.mem_Ici.2 (hai.trans hx.le)

/-- The canonical `?QVA` output basis closed under finite unions. -/
noncomputable def ofOmegaQVAFiniteUnion : CountableOutputBasis D :=
  finiteUnionClosure (ofOmegaQVA (D := D))

/-- Finitely many points of an `?QVA` Scott open admit one coded
finite-union neighbourhood contained in that open. -/
theorem ofOmegaQVAFiniteUnion_finite_cover
  (U : OutputObservation D) (xs : List D)
  (hxs : forall d in xs, d in U) :
  exists k, (forall d in xs, d in (ofOmegaQVAFiniteUnion (D := D)).code.observe k) /\
    ((ofOmegaQVAFiniteUnion (D := D)).code.observe k : Set D) subseq U :=
  finiteUnionClosure_finite_cover (ofOmegaQVA (D := D)) U xs hxs

```

```

end CountableOutputBasis

/-- A universal atomic observation. -/
structure ObservationAtom (n : Nat) (D : Type u) [CompleteLattice D] where
  output : OutputObservation D
  choi : ChoiTest n

/-- A coded atom from a countable output-observation family. -/
abbrev CodedAtom (n : Nat) (? : Type v) :=
  ChoiTest n x ?

/-- Finite conjunctions of universal observations. -/
abbrev ObservationToken (n : Nat) (D : Type u) [CompleteLattice D] :=
  List (ObservationAtom n D)

/-- Finite conjunctions from a coded output family are countable. -/
abbrev CodedToken (n : Nat) (? : Type v) :=
  List (CodedAtom n ?)

instance (n : Nat) {? : Type v} [Encodable ?] : Encodable (CodedAtom n ?) :=
  inferInstance

instance (n : Nat) {? : Type v} [Encodable ?] : Countable (CodedAtom n ?) :=
  inferInstance

instance (n : Nat) {? : Type v} [Encodable ?] : Encodable (CodedToken n ?) :=
  inferInstance

instance (n : Nat) {? : Type v} [Encodable ?] : Countable (CodedToken n ?) :=
  inferInstance

namespace FiniteInstrumentComp

variable {n : Nat} {D : Type u} [CompleteLattice D]

/-- Choi denotation distributes over a finite list of Kraus families. -/
theorem choi_flatMap {a : Type*} (xs : List a) (f : a → KrausFamily n n) :
  KrausFamily.choi (xs.flatMap f) = (xs.map fun x => KrausFamily.choi (f x)).sum := by
  induction xs with
  | nil => simp
  | cons x xs ih =>
    rw [List.flatMap_cons, KrausFamily.choi_append, List.map_cons, List.sum_cons, ih]

/-- Intrinsic Choi matrix accumulated over branches whose return value
lies in `U`. -/
noncomputable def observationChoi (? : FiniteInstrumentComp n D) (U : Set D) :
  Matrix (Fin n × Fin n) (Fin n × Fin n) ? :=
  KrausFamily.choi (?.selectedKraus U)

omit [CompleteLattice D] in
theorem observationChoi_posSemidef (? : FiniteInstrumentComp n D) (U : Set D) :
  (?observationChoi U).PosSemidef :=
  KrausFamily.choi_posSemidef (?selectedKraus U)

omit [CompleteLattice D] in
theorem observationChoi_eq_testChoi (? : FiniteInstrumentComp n D) (U : Set D) :
  ?observationChoi U = ?testChoi U := by
  classical
  rw [observationChoi, selectedKraus, choi_flatMap]
  simp [testChoi, Finset.sum_filter]

/-- For a finite instrument, every Scott-open observation can be
replaced by one coded finite-union observation that selects exactly the

```

```

same branches and lies inside the original open. -/
theorem exists_coded_observationChoi_eq [IsOmegaQVA D]
  (? : FiniteInstrumentComp n D) (U : OutputObservation D) :
  exists k,
    ((CountableOutputBasis.ofOmegaQVAFiniteUnion
      (D := D)).code.observe k : Set D) subseq U /\
    ?.observationChoi
      ((CountableOutputBasis.ofOmegaQVAFiniteUnion
        (D := D)).code.observe k : Set D) =
      ?.observationChoi U := by
classical
let xs : List D :=
  ((Finset.univ.filter fun o : ?.Outcome => ?.value o in U).toList).map ?.value
have hxs : forall d in xs, d in U := by
  intro d hd
  obtain <o, ho, rfl> := List.mem_map.mp hd
  simp using ho
obtain <k, hkcover, hkU> :=
  CountableOutputBasis.ofOmegaQVAFiniteUnion_finite_cover U xs hxs
refine <k, hkU, ?_>
have hmem (o : ?.Outcome) :
  ?.value o in
    ((CountableOutputBasis.ofOmegaQVAFiniteUnion
      (D := D)).code.observe k : Set D) <->
  ?.value o in (U : Set D) := by
constructor
* intro hV
  apply hkU
  exact hV
* intro hoU
  change ?.value o in U at hoU
  apply hkcover (?.value o)
  apply List.mem_map.mpr
  exact <o, by simp [hoU], rfl>
rw [observationChoi_eq_testChoi, observationChoi_eq_testChoi]
unfold testChoi
apply Finset.sum_congr rfl
intro o ho
exact if_congr (hmem o) rfl rfl

/-- One coded sub-observation can simultaneously select the same
branches as an arbitrary Scott open for two finite instruments. -/
theorem exists_pair_coded_observationChoi_eq [IsOmegaQVA D]
  (?? : FiniteInstrumentComp n D) (U : OutputObservation D) :
  exists k,
    ((CountableOutputBasis.ofOmegaQVAFiniteUnion
      (D := D)).code.observe k : Set D) subseq U /\
    ?.observationChoi
      ((CountableOutputBasis.ofOmegaQVAFiniteUnion
        (D := D)).code.observe k : Set D) =
      ?.observationChoi U /\
    ?.observationChoi
      ((CountableOutputBasis.ofOmegaQVAFiniteUnion
        (D := D)).code.observe k : Set D) =
      ?.observationChoi U := by
classical
let xs? : List D :=
  ((Finset.univ.filter fun o : ?.Outcome => ?.value o in U).toList).map ?.value
let xs? : List D :=
  ((Finset.univ.filter fun o : ?.Outcome => ?.value o in U).toList).map ?.value
have hxs : forall d in xs? ++ xs?, d in U := by
  intro d hd
  rcases List.mem_append.mp hd with hd | hd

```



```

    * obtain <o, ho, rfl> := List.mem_map.mp hd
      simp using ho
    * obtain <o, ho, rfl> := List.mem_map.mp hd
      simp using ho
  obtain <k, hkcover, hkU> :=
    CountableOutputBasis.ofOmegaQVAFiniteUnion_finite_cover U (xs? ++ xs?) hxs
  refine <k, hkU, ?_, ?_>
  * rw [observationChoi_eq_testChoi, observationChoi_eq_testChoi]
    unfold testChoi
    apply Finset.sum_congr rfl
    intro o ho
    apply if_congr
  * constructor
    * intro hV
      exact hkU hV
    * intro hoU
      change ?.value o in U at hoU
      apply hkcover (?.value o)
      apply List.mem_append_left xs?
      apply List.mem_map.mpr
      exact <o, by simp [hoU], rfl>
  * rfl
  * rfl
  * rw [observationChoi_eq_testChoi, observationChoi_eq_testChoi]
    unfold testChoi
    apply Finset.sum_congr rfl
    intro o ho
    apply if_congr
  * constructor
    * intro hV
      exact hkU hV
    * intro hoU
      change ?.value o in U at hoU
      apply hkcover (?.value o)
      apply List.mem_append_right xs?
      apply List.mem_map.mpr
      exact <o, by simp [hoU], rfl>
  * rfl
  * rfl

end FiniteInstrumentComp

namespace ObservationAtom

variable {n : Nat} {D : Type u} [CompleteLattice D]

/-- A physical finite instrument satisfies an atom when the selected
Choi quadratic form lies strictly above its rational threshold. -/
def Holds (a : ObservationAtom n D) (? : FiniteInstrumentComp n D) : Prop :=
  a.choi.threshold < a.choi.eval (?observationChoi a.output)

theorem eval_nonneg (a : ObservationAtom n D) (? : FiniteInstrumentComp n D) :
  0 <= a.choi.eval (?observationChoi a.output) :=
  a.choi.eval_nonneg (?observationChoi_posSemidef a.output)

theorem holds_of_threshold_lt {a b : ObservationAtom n D}
  (hout : a.output = b.output) (hvec : a.choi.1 = b.choi.1)
  (hthreshold : a.choi.threshold <= b.choi.threshold)
  {? : FiniteInstrumentComp n D} (h? : b.Holds ?) :
  a.Holds ? := by
  have heval :
    b.choi.eval (?observationChoi b.output) =
    a.choi.eval (?observationChoi a.output) := by

```

```

    simp only [ChoiTest.eval, ChoiTest.vector]
    rw [hout, hvec]
    exact hthreshold.trans_lt (h?.trans_eq heval)

end ObservationAtom

namespace ObservationToken

variable {n : Nat} {D : Type u} [CompleteLattice D]

def Holds (t : ObservationToken n D) (? : FiniteInstrumentComp n D) : Prop :=
  forall a in t, a.Holds ?

/-- Semantic weakening order on finite observations. `t <= s` means
that the stronger conjunction `s` entails `t`. -/
def Entails (t s : ObservationToken n D) : Prop :=
  forall ?, Holds s ? -> Holds t ?

instance : Preorder (ObservationToken n D) where
  le := Entails
  le_refl _ _ h := h
  le_trans _ _ _ h1 h2 ? h := h1 ? (h2 ? h)

theorem nil_le (t : ObservationToken n D) : [] <= t := by
  intro ? h a ha
  simp at ha

theorem le_append_left (t s : ObservationToken n D) : t <= t ++ s := by
  intro ? h a ha
  exact h a (List.mem_append_left s ha)

theorem le_append_right (t s : ObservationToken n D) : s <= t ++ s := by
  intro ? h a ha
  exact h a (List.mem_append_right t ha)

end ObservationToken

namespace FiniteInstrumentComp

variable {n : Nat} {D : Type u} [CompleteLattice D]

/-- Pointwise Choi refinement on every Scott-open output observation. -/
def ObservationRefines (? ? : FiniteInstrumentComp n D) : Prop :=
  forall U : OutputObservation D, ?.observationChoi U <= ?.observationChoi U

theorem observationRefines_refl (? : FiniteInstrumentComp n D) :
  ObservationRefines ? ? :=
  fun _ => le_refl

theorem observationRefines_trans {? ? ? : FiniteInstrumentComp n D}
  (h?? : ObservationRefines ? ?) (h?? : ObservationRefines ? ?) :
  ObservationRefines ? ? :=
  fun U => (h?? U).trans (h?? U)

theorem ObservationRefines.atom_holds {? ? : FiniteInstrumentComp n D}
  (h?? : ObservationRefines ? ?) {a : ObservationAtom n D}
  (ha : a.Holds ?) : a.Holds ? :=
  ha.trans_le (a.choi.eval_mono (h?? a.output))

theorem ObservationRefines.token_holds {? ? : FiniteInstrumentComp n D}
  (h?? : ObservationRefines ? ?) {t : ObservationToken n D}
  (ht : t.Holds ?) : t.Holds ? := by
  intro a ha

```

```

    exact h?.atom_holds (ht a ha)

end FiniteInstrumentComp

namespace RatChoiVec

/-- The rational vector `e_p + e_q`, used to recover real parts by
polarization. -/
def realPair {n : Nat} (p q : Fin n x Fin n) : RatChoiVec n :=
  single (finProdFinEquiv p) + single (finProdFinEquiv q)

/-- The rational vector `e_p + i e_q`, used to recover imaginary parts
by polarization. -/
def imagPair {n : Nat} (p q : Fin n x Fin n) : RatChoiVec n :=
  fun k => single (finProdFinEquiv p) k +
    RatComplex.I * single (finProdFinEquiv q) k

@[simp]
theorem toComplex_realPair {n : Nat} (p q : Fin n x Fin n) :
  (realPair p q).toComplex =
    Pi.single p (1 : ?) + Pi.single q (1 : ?) := by
  simp [realPair]

@[simp]
theorem toComplex_imagPair {n : Nat} (p q : Fin n x Fin n) :
  (imagPair p q).toComplex =
    Pi.single p (1 : ?) + Complex.I * Pi.single q (1 : ?) := by
  funext i
  by_cases hip : i = p
  * subst i
    by_cases hpq : p = q
    * subst q
      simp [imagPair, RatChoiVec.toComplex, RatChoiVec.single]
    * simp [imagPair, RatChoiVec.toComplex, RatChoiVec.single, hpq]
  * by_cases hiq : i = q
    * subst i
      have hqp : q != p := fun h => hip h
      simp [imagPair, RatChoiVec.toComplex, RatChoiVec.single, hqp]
    * simp [imagPair, RatChoiVec.toComplex, RatChoiVec.single, hip, hiq]

end RatChoiVec

namespace ChoiTest

theorem eval_single {n : Nat}

Lean 4 source (lines 801–960)

  (J : Matrix (Fin n x Fin n) (Fin n x Fin n) ?)
  (p : Fin n x Fin n) :
  eval (RatChoiVec.single (finProdFinEquiv p), <0, le_rfl>) J =
    (J p p).re := by
  simp [eval, vector, single_dotProduct]

theorem eval_realPair {n : Nat}
  (J : Matrix (Fin n x Fin n) (Fin n x Fin n) ?)
  (p q : Fin n x Fin n) :
  eval (RatChoiVec.realPair p q, <0, le_rfl>) J =
    (J p p + J p q + J q p + J q q).re := by
  simp only [eval, vector, RatChoiVec.toComplex_realPair]
  simp [add_dotProduct, dotProduct_add, Matrix.mulVec_add, single_dotProduct]
  ring

theorem eval_imagPair {n : Nat}

```

```

(J : Matrix (Fin n x Fin n) (Fin n x Fin n) ?)
(p q : Fin n x Fin n) :
eval (RatChoiVec.imagPair p q, <0, le_rfl>) J =
  (J p p + Complex.I * J p q - Complex.I * J q p + J q q).re := by
simp only [eval, vector, RatChoiVec.toComplex_imagPair]
simp [add_dotProduct, dotProduct_add, Matrix.mulVec_add, Matrix.mulVec_smul,
  star_smul, single_dotProduct]
ring

end ChoiTest

/-- Exact analytic checkpoint for the countable quantum tests. It says
that Gaussian-rational quadratic forms separate Hermitian matrices.
The finite-coordinate algebra needed to discharge this proposition is
kept explicit rather than hidden in the definition of the token order. -/
def RationalQuadraticSeparation (n : Nat) : Prop :=
  forall J K : Matrix (Fin n x Fin n) (Fin n x Fin n) ?,
    J.IsHermitian -> K.IsHermitian ->
    (forall v : RatChoiVec n,
      ChoiTest.eval (v, <0, le_rfl>) J =
        ChoiTest.eval (v, <0, le_rfl>) K) ->
    J = K

/-- Gaussian-rational quadratic forms separate finite-dimensional
Hermitian matrices. Coordinate vectors recover the diagonal, while
`e_p + e_q` and `e_p + i e_q` recover the real and imaginary parts of
each off-diagonal entry by polarization. -/
theorem rationalQuadraticSeparation (n : Nat) :
  RationalQuadraticSeparation n := by
  intro J K hJ hK h
  ext p q
  apply Complex.ext
  * have hdp := h (RatChoiVec.single (finProdFinEquiv p))
    have hdq := h (RatChoiVec.single (finProdFinEquiv q))
    have hr := h (RatChoiVec.realPair p q)
    rw [ChoiTest.eval_single, ChoiTest.eval_single] at hdp hdq
    rw [ChoiTest.eval_realPair, ChoiTest.eval_realPair] at hr
    have hJqp : J q p = star (J p q) := (hJ.apply q p).symm
    have hKqp : K q p = star (K p q) := (hK.apply q p).symm
    rw [hJqp, hKqp] at hr
    have hJstar : (star (J p q)).re = (J p q).re := by
      rw [RCLike.star_def, Complex.conj_re]
    have hKstar : (star (K p q)).re = (K p q).re := by
      rw [RCLike.star_def, Complex.conj_re]
    simp only [Complex.add_re, hJstar, hKstar] at hr
    linarith
  * have hdp := h (RatChoiVec.single (finProdFinEquiv p))
    have hdq := h (RatChoiVec.single (finProdFinEquiv q))
    have hi := h (RatChoiVec.imagPair p q)
    rw [ChoiTest.eval_single, ChoiTest.eval_single] at hdp hdq
    rw [ChoiTest.eval_imagPair, ChoiTest.eval_imagPair] at hi
    have hJqp : J q p = star (J p q) := (hJ.apply q p).symm
    have hKqp : K q p = star (K p q) := (hK.apply q p).symm
    rw [hJqp, hKqp] at hi
    have hJstar : (star (J p q)).im = -(J p q).im := by
      rw [RCLike.star_def, Complex.conj_im]
    have hKstar : (star (K p q)).im = -(K p q).im := by
      rw [RCLike.star_def, Complex.conj_im]
    simp only [Complex.add_re, Complex.sub_re, Complex.mul_re,
      Complex.I_re, Complex.I_im, zero_mul, one_mul, zero_sub,
      hJstar, hKstar, neg_neg] at hi
    linarith

```

```

theorem choi_eq_of_rational_tests {n : Nat}
  (K L : KrausFamily n n)
  (h : forall v : RatChoiVec n,
    ChoiTest.eval (v, <0, le_rfl>) (KrausFamily.choi K) =
    ChoiTest.eval (v, <0, le_rfl>) (KrausFamily.choi L)) :
  KrausFamily.choi K = KrausFamily.choi L :=
  rationalQuadraticSeparation n _ _ (KrausFamily.choi_posSemidef K).1
  (KrausFamily.choi_posSemidef L).1 h

theorem exists_strict_rational_test_of_nonzero {n : Nat}
  {J : Matrix (Fin n x Fin n) (Fin n x Fin n) ?}
  (hJ : J.PosSemidef) (hne : J != 0) :
  exists v : RatChoiVec n,
    ChoiTest.threshold (v, <0, le_rfl>) <
    ChoiTest.eval (v, <0, le_rfl>) J := by
  have hex : exists v : RatChoiVec n,
    ChoiTest.eval (v, <0, le_rfl>) J != 0 := by
  by_contra h
  have hall : forall v : RatChoiVec n,
    ChoiTest.eval (v, <0, le_rfl>) J = 0 := by
  intro v
  by_contra hv
  exact h <v, hv>
  apply hne
  apply rationalQuadraticSeparation n J 0 hJ.1 Matrix.isHermitian_zero
  intro v
  simpa [ChoiTest.eval] using hall v
  obtain <v, hv> := hex
  refine <v, ?_>
  have hnonneg := ChoiTest.eval_nonneg (v, <0, le_rfl>) hJ
  simpa [ChoiTest.threshold] using (lt_of_le_of_ne hnonneg hv.symm)

/-- The computational-basis measurement is accepted by the physical
observation semantics: every Scott-open selected Choi sum is positive
semidefinite and hence yields nonnegative rational quadratic tests. -/
theorem measureZComp_observation_nonnegative
  (U : OutputObservation Bool) (t : ChoiTest 2) :
  0 <= t.eval (Qubit.measureZComp.observationChoi U) :=
  t.eval_nonneg (Qubit.measureZComp.observationChoi_posSemidef U)

namespace CodedAtom

variable {n : Nat} {D : Type u} [CompleteLattice D]
variable {? : Type v}

def toObservation (C : OutputCode ? D) (a : CodedAtom n ?) :
  ObservationAtom n D :=
  <C.observe a.2, a.1>

def Holds (C : OutputCode ? D) (a : CodedAtom n ?)
  (? : FiniteInstrumentComp n D) : Prop :=
  (toObservation C a).Holds ?

end CodedAtom

namespace CodedToken

variable {n : Nat} {D : Type u} [CompleteLattice D]
variable {? : Type v}

def toObservation (C : OutputCode ? D) (t : CodedToken n ?) :
  ObservationToken n D :=
  t.map (CodedAtom.toObservation C)

```

```

def Holds (C : OutputCode ? D) (t : CodedToken n ?)
  (? : FiniteInstrumentComp n D) : Prop :=
  (toObservation C t).Holds ?

theorem holds_iff (C : OutputCode ? D) (t : CodedToken n ?)
  (? : FiniteInstrumentComp n D) :
  Holds C t ? <-> forall a in t, CodedAtom.Holds C a ? := by
  constructor
  * intro ht a ha
    exact ht _ (List.mem_map.mpr <a, ha, rfl>)
  * intro ht x hx
    obtain <a, ha, rfl> := List.mem_map.mp hx
    exact ht a ha

end CodedToken

end QLambda

```

A.36 QLambda/OmegaQVA.lean

547 lines.

Lean 4 source (lines 1–400)

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/
import Mathlib.Data.Fintype.Pi
import QLambda.Saturation
import QLambda.QuantumStateSpace
import Scott1972.ContinuousLattice.Constructions
import Scott1972.ContinuousLattice.FunctionSpaces

/-!
# Quantum-valuation approximable domains (`?QVA`)

A continuous lattice is in `?QVA` when `id` is the directed supremum of
an increasing sequence of maps that factor through a finite direct sum
of spectrahedra `S_ <= 1(M_{d_k})` (the state space of `?_k M_{d_k}(?)`
with per-block trace bound; a single `SubNormalizedDensity dim` when
`dims = [dim]`).
-/

namespace Scott1972.ContinuousLattice

open SubNormalizedDensity

variable {D E : Type*} [CompleteLattice D] [CompleteLattice E]

/-- Finite product of Loewner spectrahedra, one block per matrix size. -/
def DensityVec : List Nat -> Type
| [] => PUnit
| n :: ns => SubNormalizedDensity n x DensityVec ns

namespace DensityVec

instance instPartialOrder : (ns : List Nat) -> PartialOrder (DensityVec ns)
| [] => inferInstanceAs (PartialOrder PUnit)
| _ :: ns =>
  haveI := instPartialOrder ns

```

```

inferInstanceAs (PartialOrder (_ x _))

instance instOrderBot : (ns : List Nat) -> OrderBot (DensityVec ns)
| [] => { bot := <>, bot_le := fun _ => trivial }
| _ :: ns =>
  haveI := instOrderBot ns
  inferInstanceAs (OrderBot (_ x _))

end DensityVec

/-- `a` factors through `DensityVec dims` via monotone encoding and
reconstruction. For `dims = [dim]` this is factorization through
`SubNormalizedDensity dim`. -/
structure QFactorable (a : ScottMap D E) where
  dims : List Nat
  enc : D -> DensityVec dims
  recon : DensityVec dims -> E
  enc_mono : Monotone enc
  recon_mono : Monotone recon
  factor : forall x, (a : D -> E) x = recon (enc x)

theorem directedOn_image_monotone {a b : Type*} [Preorder a] [Preorder b]
  {S : Set a} {f : a -> b} (hdir : DirectedOn (* <= *) S) (hf : Monotone f) :
  DirectedOn (* <= *) (f '' S) := by
  rintro _ <a, ha, rfl> _ <b, hb, rfl>
  obtain <c, hc, hac, hbc> := hdir a ha b hb
  exact <f c, <c, hc, rfl>, hf hac, hf hbc>

/-- Product of Scott self-maps, acting coordinatewise. -/
def prodMap (f : ScottMap D D) (g : ScottMap E E) : ScottMap (D x E) (D x E) :=
  <fun p => (f p.1, g p.2), continuous_of_preservesDirectedSup <| by
  intro S hS hSdir
  refine Prod.ext ?_ ?_
  * have hf := f.preservesDirectedSup_coe (Prod.fst '' S) (hS.image Prod.fst)
    (directedOn_image_monotone hSdir fun _ _ h => h.1)
    change f (sSup S).1 = sSup (Prod.fst '' ((fun p => (f p.1, g p.2)) '' S))
    rw [Prod.fst_sSup, hf]
    congr 1
    ext y
    constructor
    * rintro <z, <p, hp, rfl>, rfl>
      exact <(f p.1, g p.2), <p, hp, rfl>, rfl>
    * rintro <w, <p, hp, rfl>, rfl>
      exact <p.1, <p, hp, rfl>, rfl>
  * have hg := g.preservesDirectedSup_coe (Prod.snd '' S) (hS.image Prod.snd)
    (directedOn_image_monotone hSdir fun _ _ h => h.2)
    change g (sSup S).2 = sSup (Prod.snd '' ((fun p => (f p.1, g p.2)) '' S))
    rw [Prod.snd_sSup, hg]
    congr 1
    ext y
    constructor
    * rintro <z, <p, hp, rfl>, rfl>
      exact <(f p.1, g p.2), <p, hp, rfl>, rfl>
    * rintro <w, <p, hp, rfl>, rfl>
      exact <p.2, <p, hp, rfl>, rfl>>

@[simp] theorem prodMap_apply (f : ScottMap D D) (g : ScottMap E E) (p : D x E) :
  (prodMap f g : (D x E) -> D x E) p = (f p.1, g p.2) :=
  rfl

namespace QFactorable

def square {a : ScottMap D D} (h : QFactorable a) : QFactorable (a.comp a) where

```

```

dims := h.dims
enc := h.enc
recon := (a : D → D) comp h.recon
enc_mono := h.enc_mono
recon_mono := (ScottMap.monotone a).comp h.recon_mono
factor := fun x => by simp [ScottMap.comp_apply, h.factor]

def conjRetr (R : IsContinuousLatticeRetraction E D) {a : ScottMap D D}
  (h : QFactorable a) : QFactorable (R.retr.comp (a.comp R.incl)) where
  dims := h.dims
  enc := h.enc comp (R.incl : E → D)
  recon := (R.retr : D → E) comp h.recon
  enc_mono := h.enc_mono.comp R.incl.monotone
  recon_mono := R.retr.monotone.comp h.recon_mono
  factor := fun x => by simp [ScottMap.comp_apply, h.factor]

/-- Pair of density vectors. -/
def pairEnc {ns ms : List Nat} (p : DensityVec ns) (q : DensityVec ms) :
  DensityVec (ns ++ ms) :=
  match ns, p with
  | [], _ => q
  | _ :: _, (p', p') => (p', pairEnc p' q)

def pairUnenc {ns ms : List Nat} (v : DensityVec (ns ++ ms)) :
  DensityVec ns × DensityVec ms :=
  match ns, v with
  | [], v => (<>, v)
  | _ :: ns', (p', v') =>
    let iq := pairUnenc (ns := ns') v'
    ((p', iq.1), iq.2)

theorem pairEnc_unenc {ns ms : List Nat} (p : DensityVec ns) (q : DensityVec ms) :
  pairUnenc (pairEnc p q) = (p, q) :=
  match ns, p with
  | [], <> => rfl
  | _ :: _, (p', p') => by
    simp [pairEnc, pairUnenc, pairEnc_unenc p' q]

theorem pairEnc_mono_aux {ns ms : List Nat}
  (p p' : DensityVec ns) (q q' : DensityVec ms) (hp : p ≤ p') (hq : q ≤ q') :
  pairEnc p q ≤ pairEnc p' q' :=
  match ns, p, p' with
  | [], <>, <> => hq
  | _ :: _, (_, t), (_, t') =>
    <hp.1, pairEnc_mono_aux t t' q q' hp.2 hq>

theorem pairEnc_mono {ns ms : List Nat} :
  Monotone (fun pq : DensityVec ns × DensityVec ms => pairEnc pq.1 pq.2) :=
  fun pq pq' hpq => pairEnc_mono_aux pq.1 pq'.1 pq.2 pq'.2 hpq.1 hpq.2

theorem pairUnenc_mono_aux {ns ms : List Nat} (v v' : DensityVec (ns ++ ms))
  (hv : v ≤ v') : pairUnenc (ns := ns) (ms := ms) v ≤ pairUnenc (ns := ns) v' :=
  match ns, v, v' with
  | [], _, _ => <le_rfl, hv>
  | _ :: _, (_, w), (_, w') =>
    have ih := pairUnenc_mono_aux (ns := _) w w' hv.2
    <<hv.1, ih.1>, ih.2>

theorem pairUnenc_mono {ns ms : List Nat} :
  Monotone (pairUnenc (ns := ns) (ms := ms)) :=
  fun v v' hv => pairUnenc_mono_aux v v' hv

def prod {f : ScottMap D D} {g : ScottMap E E}

```



```

    (hf : QFactorable f) (hg : QFactorable g) :
    QFactorable (prodMap f g) where
    dims := hf.dims ++ hg.dims
    enc := fun p => pairEnc (hf.enc p.1) (hg.enc p.2)
    recon := fun v =>
      let iq := pairUnenc (ns := hf.dims) v
      (hf.recon iq.1, hg.recon iq.2)
    enc_mono := by
      intro p p' hp
      exact pairEnc_mono
        (show (hf.enc p.1, hg.enc p.2) <= (hf.enc p'.1, hg.enc p'.2) from
          <hf.enc_mono hp.1, hg.enc_mono hp.2>)
    recon_mono := by
      intro v v' hv
      have h := pairUnenc_mono (ns := hf.dims) (ms := hg.dims) hv
      exact <hf.recon_mono h.1, hg.recon_mono h.2>
    factor := fun p => by
      simp [prodMap, pairEnc_unenc, hf.factor, hg.factor]

end QFactorable

/-- A continuous lattice whose identity is a directed supremum of
Q-factorable, finitely separated approximants. -/
class IsOmegaQVA (D : Type*) [CompleteLattice D] where
  isContinuousLattice : IsContinuousLattice D
  approx : Nat -> ScottMap D D
  qfactorable : forall n, QFactorable (approx n)
  separated : forall n, FinitelySeparated (approx n)
  monotone_approx : Monotone approx
  iSup_approx : (bigcup n, approx n) = ScottMap.idMap

/-- Binary products of continuous lattices are continuous (Prop. 2.9, two factors). -/
theorem continuousLattice_prod (hD : IsContinuousLattice D) (hE : IsContinuousLattice E) :
  IsContinuousLattice (D x E) := by
  intro y
  refine <fun x hx => hx.le, fun b hb => ?_>
  constructor
  * rw [← hD.sSup_wayBelow y.1]
  apply sSup_le
  intro a ha
  set e : D x E := (a, False)
  have he : e << y := by
    obtain <U, hU, hyU, hsub> := ha
    refine <{p : D x E | p.1 in U}, <?_, ?_>, hyU, ?_>
    * intro p q hpq hp
      exact hU.1 hpq.1 hp
    * intro S hS hSdir hmem
      have hmem' : sSup (Prod.fst '' S) in U := by
        rwa [← Prod.fst_sSup]
      have hdir' : DirectedOn (* <= *) (Prod.fst '' S) :=
        directedOn_image_monotone hSdir fun _ _ h => h.1
      obtain <t, hting, htU> := hU.2 (hS.image Prod.fst) hdir' hmem'
      obtain <p, hpS, rfl> := hting
      exact <p, hpS, htU>
    * intro p hp
      exact <Set.mem_Ici.1 (hsub hp), bot_le>
  exact (hb he).1
  * rw [← hE.sSup_wayBelow y.2]
  apply sSup_le
  intro a ha
  set e : D x E := (False, a)
  have he : e << y := by
    obtain <U, hU, hyU, hsub> := ha

```

```

refine <{p : D x E | p.2 in U}, <?_, ?_>, hyU, ?_>
* intro p q hpq hp
  exact hU.1 hpq.2 hp
* intro S hS hSdir hmem
  have hmem' : sSup (Prod.snd '' S) in U := by
    rwa [ <- Prod.snd_sSup]
  have hdir' : DirectedOn (* <= *) (Prod.snd '' S) :=
    directedOn_image_monotone hSdir fun _ _ h => h.2
  obtain <t, hting, htU> := hU.2 (hS.image Prod.snd) hdir' hmem'
  obtain <p, hpS, rfl> := hting
  exact <p, hpS, htU>
* intro p hp
  exact <bot_le, Set.mem_Ici.1 (hsub hp)>
exact (hb he).2

/-- `?QVA` is closed under Scott-continuous retracts. -/
@[reducible] def omegaQVA_of_retract [IsOmegaQVA D]
  (R : IsContinuousLatticeRetraction E D) : IsOmegaQVA E where
isContinuousLattice := proposition_2_10_a R IsOmegaQVA.isContinuousLattice
approx := fun n => R.retr.comp ((IsOmegaQVA.approx n).comp R.incl)
qfactorable := fun n => QFactorable.conjRetr R (IsOmegaQVA.qfactorable n)
separated := fun n => by
  classical
  obtain <M, hM> := IsOmegaQVA.separated (D := D) n
  refine <M.image (R.retr : D -> E), fun x => ?_>
  obtain <m, hmM, hax, hmx> := hM (R.incl x)
  refine <R.retr m, Finset.mem_image.mpr <m, hmM, rfl>, R.retr.monotone hax, ?_>
  have := R.retr.monotone hmx
  rwa [R.retr_incl] at this
monotone_approx := fun i j hij => by
  rw [ScottMap.le_def]
  intro x
  exact R.retr.monotone (IsOmegaQVA.monotone_approx hij (R.incl x))
iSup_approx := by
  apply ScottMap.ext
  intro x
  have hsup : R.incl x =
    bigcup n, (IsOmegaQVA.approx (D := D) n : D -> D) (R.incl x) := by
    simpa [scottMap_iSup_apply, ScottMap.idMap_apply] using
      (congrArg (fun f : ScottMap D D => (f : D -> D) (R.incl x))
        IsOmegaQVA.iSup_approx).symm
  have hdir : DirectedOn (* <= *)
    (Set.range fun n => (IsOmegaQVA.approx (D := D) n : D -> D) (R.incl x)) :=
    directedOn_range.2 fun p q =>
      <max p q,
        IsOmegaQVA.monotone_approx (le_max_left p q) (R.incl x),
        IsOmegaQVA.monotone_approx (le_max_right p q) (R.incl x)>
  have hne : (Set.range fun n =>
    (IsOmegaQVA.approx (D := D) n : D -> D) (R.incl x)).Nonempty :=
    Set.range_nonempty _
  rw [scottMap_iSup_apply, ScottMap.idMap_apply]
  have hswap :
    (bigcup n, R.retr ((IsOmegaQVA.approx (D := D) n : D -> D) (R.incl x))) =
    R.retr (bigcup n, (IsOmegaQVA.approx (D := D) n : D -> D) (R.incl x)) := by
  have hr : (bigcup n, (IsOmegaQVA.approx (D := D) n : D -> D) (R.incl x)) =
    sSup (Set.range fun n => (IsOmegaQVA.approx (D := D) n : D -> D) (R.incl x)) :=
    sSup_range.symm
  rw [hr, R.retr.preservesDirectedSup_coe _ hne hdir, <- Set.range_comp, sSup_range]
  rfl
  change bigcup n, R.retr ((IsOmegaQVA.approx (D := D) n : D -> D) (R.incl x)) = x
  rw [hswap, <- hsup, R.retr_incl]

/-- `?QVA` is closed under binary products. -/

```

```

@[reducible] def omegaQVA_prod [IsOmegaQVA D] [IsOmegaQVA E] : IsOmegaQVA (D x E) where
  isContinuousLattice :=
    continuousLattice_prod IsOmegaQVA.isContinuousLattice
    IsOmegaQVA.isContinuousLattice
  approx := fun n =>
    prodMap (IsOmegaQVA.approx (D := D) n) (IsOmegaQVA.approx (D := E) n)
  qfactorable := fun n =>
    QFactorable.prod (IsOmegaQVA.qfactorable n) (IsOmegaQVA.qfactorable n)
  separated := fun n => by
    obtain <M, hM> := IsOmegaQVA.separated (D := D) n
    obtain <N, hN> := IsOmegaQVA.separated (D := E) n
    refine <M.product N, fun p => ?_>
    obtain <m, hmM, hfx, hmx> := hM p.1
    obtain <n, hnN, hgy, hny> := hN p.2
    exact <(m, n), Finset.mem_product.mpr <hmM, hnN>, <hfx, hgy>, <hmx, hny>>
  monotone_approx := fun i j hij => by
    rw [ScottMap.le_def]
    intro p
    exact <IsOmegaQVA.monotone_approx hij p.1, IsOmegaQVA.monotone_approx hij p.2>
  iSup_approx := by
    apply ScottMap.ext
    intro p
    rw [scottMap_iSup_apply, ScottMap.idMap_apply]
    refine Prod.ext ?_ ?_
    * rw [Prod.fst_iSup]
      have h := congrArg (fun f : ScottMap D D => (f : D -> D) p.1)
        (IsOmegaQVA.iSup_approx (D := D))
      simpa [scottMap_iSup_apply, ScottMap.idMap_apply, prodMap_apply] using h
    * rw [Prod.snd_iSup]
      have h := congrArg (fun f : ScottMap E E => (f : E -> E) p.2)
        (IsOmegaQVA.iSup_approx (D := E))
      simpa [scottMap_iSup_apply, ScottMap.idMap_apply, prodMap_apply] using h

/-! ### Countable products

Finite-support stagewise approximants put `?_n E_n` in `?QVA` when each factor is.
The inverse limit is then a retract, hence also in `?QVA`. -/

section PiOmega

variable {E : Nat -> Type*} [forall n, CompleteLattice (E n)] [forall n, IsOmegaQVA (E n)]

/-- Prefix approximant: apply the `N`-th factor approximant on coordinates `<= N`,
and send the tail to `False`. -/
def prefixFun (N : Nat) (x : forall n, E n) : forall n, E n :=
  fun n => if n <= N then (IsOmegaQVA.approx (D := E n) N : E n -> E n) (x n) else False

theorem prefixFun_mono (N : Nat) : Monotone (prefixFun (E := E) N) := by
  intro x y hxy n
  by_cases hn : n <= N
  * simpa [prefixFun, hn] using
    (IsOmegaQVA.approx (D := E n) N).monotone (hxy n)
  * simp [prefixFun, hn]

def prefixMap (N : Nat) : ScottMap (forall n, E n) (forall n, E n) :=
  <prefixFun N, continuous_of_preservesDirectedSup <| by
    intro S hS hSdir
    funext n
    rw [sSup_apply_eq_sSup_image]
    by_cases hn : n <= N
    * have hdir' : DirectedOn (* <= *) (Function.eval n '' S) :=
        directedOn_image_monotone hSdir fun _ _ h => h n
    have hsup :=

```

```

      (IsOmegaQVA.approx (D := E n) N).preservesDirectedSup_coe
      (Function.eval n '' S) (hS.image _) hdir'
change prefixFun (E := E) N (sSup S) n =
  sSup (Function.eval n '' (prefixFun (E := E) N '' S))
simp only [prefixFun, hn, reduceIte]
rw [sSup_apply_eq_sSup_image, hsup]
congr 1
ext y
constructor
* rintro <z, <x, hx, rfl>, rfl>
  refine <prefixFun (E := E) N x, <x, hx, rfl>, ?_>
  simp [prefixFun, hn]
* rintro <w, <x, hx, rfl>, rfl>
  refine <x n, <x, hx, rfl>, ?_>
  simp [prefixFun, hn]
* change prefixFun (E := E) N (sSup S) n =
  sSup (Function.eval n '' (prefixFun (E := E) N '' S))
simp only [prefixFun, hn, reduceIte]
apply le_antisymm
* exact bot_le
* refine sSup_le ?_
  rintro _ <w, <x, hx, rfl>, rfl>
  simp [prefixFun, hn]>

@[simp] theorem prefixMap_apply (N : Nat) (x : forall n, E n) (n : Nat) :
  (prefixMap (E := E) N : _ -> _) x n = prefixFun (E := E) N x n :=
  rfl

def prefixDims (j : Nat) : Nat -> List Nat
| 0 => (IsOmegaQVA.qfactorable (D := E 0) j).dims
| k + 1 => prefixDims j k ++ (IsOmegaQVA.qfactorable (D := E (k + 1)) j).dims

def encPrefix (j : Nat) : (k : Nat) -> (forall n, E n) -> DensityVec (prefixDims (E := E) j k)
| 0, x => (IsOmegaQVA.qfactorable (D := E 0) j).enc (x 0)
| k + 1, x =>
  QFactorable.pairEnc (encPrefix j k x)
  ((IsOmegaQVA.qfactorable (D := E (k + 1)) j).enc (x (k + 1)))

def recPrefix (j : Nat) : (k : Nat) -> DensityVec (prefixDims (E := E) j k) -> (forall n, E n)
| 0, v => fun n =>
  if h : n = 0 then
    h |> (IsOmegaQVA.qfactorable (D := E 0) j).recon v
  else False
| k + 1, v => fun n =>
  if h : n = k + 1 then
    h |> (IsOmegaQVA.qfactorable (D := E (k + 1)) j).recon
    (QFactorable.pairUnenc (ns := prefixDims (E := E) j k) v).2
  else
    recPrefix j k (QFactorable.pairUnenc (ns := prefixDims (E := E) j k) v).1 n

theorem encPrefix_mono (j k : Nat) : Monotone (encPrefix (E := E) j k) := by
  induction k with
  | zero =>
    intro x y hxy
    exact (IsOmegaQVA.qfactorable (D := E 0) j).enc_mono (hxy 0)
  | succ k ih =>
    intro x y hxy
    exact QFactorable.pairEnc_mono
    (show

```

```

      (encPrefix (E := E) j k x,
        (IsOmegaQVA.qfactorable (D := E (k + 1)) j).enc (x (k + 1))) <=
      (encPrefix (E := E) j k y,
        (IsOmegaQVA.qfactorable (D := E (k + 1)) j).enc (y (k + 1))) from
    <ih hxy, (IsOmegaQVA.qfactorable (D := E (k + 1)) j).enc_mono (hxy (k + 1))>

theorem recPrefix_mono (j k : Nat) : Monotone (recPrefix (E := E) j k) := by
  induction k with
  | zero =>
    intro v w hvw n
    by_cases hn : n = 0
    * subst hn
      simp [recPrefix] using (IsOmegaQVA.qfactorable (D := E 0) j).recon_mono hvw
    * simp [recPrefix, hn]
  | succ k ih =>
    intro v w hvw n
    have h := QFactorable.pairUnenc_mono (ns := prefixDims (E := E) j k) hvw
    by_cases hn : n = k + 1
    * subst hn
      simp [recPrefix] using
        (IsOmegaQVA.qfactorable (D := E (k + 1)) j).recon_mono h.2
    * simp [recPrefix, hn]
      exact ih h.1 n

theorem recPrefix_encPrefix (j k : Nat) (x : forall n, E n) (n : Nat) :
  recPrefix (E := E) j k (encPrefix (E := E) j k x) n =
    if n <= k then (IsOmegaQVA.approx (D := E n) j : E n -> E n) (x n) else False := by
  induction k generalizing n with
  | zero =>
    by_cases hn : n = 0
    * subst hn
      simp [recPrefix, encPrefix, (IsOmegaQVA.qfactorable (D := E 0) j).factor]
    * have : not n <= 0 := fun h => hn (Nat.eq_zero_of_le_zero h)
      simp [recPrefix, encPrefix, hn, this]
  | succ k ih =>
    have hpair := QFactorable.pairEnc_unenc (encPrefix (E := E) j k x)
      ((IsOmegaQVA.qfactorable (D := E (k + 1)) j).enc (x (k + 1)))
    by_cases hn : n = k + 1
    * subst hn
      simp [recPrefix, encPrefix, hpair,
        (IsOmegaQVA.qfactorable (D := E (k + 1)) j).factor]
    * have hle : (n <= k + 1) <-> n <= k :=
      <fun h => Nat.le_of_lt_succ (lt_of_le_of_ne h hn), fun h => h.trans (Nat.le_succ k)>
      simp [recPrefix, encPrefix, hpair, hn, hle, ih]

def prefixFactorable (N : Nat) : QFactorable (prefixMap (E := E) N) where
  dims := prefixDims (E := E) N N
  enc := encPrefix (E := E) N N
  recon := recPrefix (E := E) N N
  enc_mono := encPrefix_mono N N
  recon_mono := recPrefix_mono N N
  factor := fun x => by
    funext n
    simp [prefixMap, prefixFun] using (recPrefix_encPrefix (E := E) N N x n).symm

theorem prefixMap_separated (N : Nat) : FinitelySeparated (prefixMap (E := E) N) := by
  classical
  let Ms : (i : Fin (N + 1)) -> Finset (E i.val) := fun i =>
    Classical.choose (IsOmegaQVA.separated (D := E i.val) N)
  have hMs : forall i : Fin (N + 1), forall x : E i.val,
    exists m in Ms i, (IsOmegaQVA.approx (D := E i.val) N : _ -> _) x <= m /\ m <=
    x :=
  fun i => Classical.choose_spec (IsOmegaQVA.separated (D := E i.val) N)

```

```

let M? : Finset (forall i : Fin (N + 1), E i.val) := Fintype.piFinset Ms
refine <M?.image fun m => fun n => if h : n < N + 1 then m <n, h> else False, fun x => ?_>
have hx : forall i : Fin (N + 1),
  exists m in Ms i, (IsOmegaQVA.approx (D := E i.val) N : _ -> _) (x i.val) <= m /\
    m <= x i.val :=
  fun i => hMs i (x i.val)
choose m hm using hx
have hm? : m in M? := by
  rw [Fintype.mem_piFinset]
  exact fun i => (hm i).1
refine <fun n => if h : n < N + 1 then m <n, h> else False,
  Finset.mem_image.mpr <m, hm?, rfl>, ?_, ?_>
* intro n
  by_cases hn : n < N + 1
  * have hle : n <= N := Nat.lt_succ_iff.mp hn
    simp [prefixFun, prefixMap, hle, hn] using (hm <n, hn>).2.1
  * have hle : not n <= N := fun h => hn (Nat.lt_succ_of_le h)
    simp [prefixFun, prefixMap, hle, hn]
* intro n
  by_cases hn : n < N + 1
  * simp [hn] using (hm <n, hn>).2.2
  * simp [hn]

theorem prefixMap_mono : Monotone (prefixMap (E := E)) := by
  intro i j hij
  rw [ScottMap.le_def]
  intro x n
  by_cases hn : n <= i
  * have hj : n <= j := hn.trans hij
    simp [prefixMap, prefixFun, hn, hj] using
      IsOmegaQVA.monotone_approx (D := E n) hij (x n)
  * by_cases hj : n <= j
    * simp [prefixMap, prefixFun, hn, hj]
    * simp [prefixMap, prefixFun, hn, hj]

/-- `?QVA` is closed under countable products. -/
@[reducible] def omegaQVA_pi : IsOmegaQVA (forall n, E n) where
  isContinuousLattice :=
    proposition_2_9_a E fun n => IsOmegaQVA.isContinuousLattice (D := E n)
  approx := prefixMap
  qfactorable := prefixFactorable
  separated := prefixMap_separated
  monotone_approx := prefixMap_mono
  iSup_approx := by
    apply ScottMap.ext
    intro x
    funext k
    have hid := congrArg (fun f : ScottMap (E k) (E k) => (f : E k -> E k) (x k))
      (IsOmegaQVA.iSup_approx (D := E k))
    have hcoord : (bigcup n, (IsOmegaQVA.approx (D := E k) n : E k -> E k) (x k)) = x k :=
      by
        simp [scottMap_iSup_apply, ScottMap.idMap_apply] using hid
    rw [scottMap_iSup_apply, ScottMap.idMap_apply, iSup_apply]
    change (bigcup n, prefixFun (E := E) n x k) = x k
    refine le_antisymm ?_ ?_
  * refine iSup_le fun n => ?_
    by_cases hk : k <= n
    * simp [prefixFun, hk] using finitelySeparated_le_id
      (IsOmegaQVA.separated (D := E k) n) (x k)
    * simp [prefixFun, hk]
  * rw [← hcoord]
    refine iSup_le fun n => ?_
    have hn : k <= max n k := le_max_right _ _

```

```

calc
  (IsOmegaQVA.approx (D := E k) n : E k -> E k) (x k)
    <= (IsOmegaQVA.approx (D := E k) (max n k) : E k -> E k) (x k) :=
    IsOmegaQVA.monotone_approx (le_max_left n k) (x k)
  _ = prefixFun (E := E) (max n k) x k := by simp [prefixFun, hn]
  _ <= bigcup m, prefixFun (E := E) m x k :=
    le_iSup (fun m => prefixFun (E := E) m x k) (max n k)

end PiOmega

end Scott1972.ContinuousLattice

```

A.37 QLambda/Operational.lean

67 lines.

Lean 4 source

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/
import QLambda.Syntax

/-!
# Operational semantics of `qfun`

Paper S2. Call-by-value small-step interfaces for the three choices:

* `?_p` -- a weighted transition with probabilities `p` and `1-p`;
* `sqcap` -- internal scheduler, either branch;
* `[]` -- a separately labelled environment-triggered transition.

Keeping weighted and externally triggered steps separate prevents
either effect from being silently identified with nondeterminism.
-/

namespace QLambda

/-- Call-by-value results. Primitive quantum operations remain computations;
ordinary and recursive abstractions are values. -/
inductive Value {Prim : Type} : Term Prim -> Prop where
  | lam (x : Name) (M : Term Prim) : Value (.lam x M)
  | recLam (self arg : Name) (M : Term Prim) : Value (.recLam self arg M)

/-- Unweighted internal one-step reduction. -/
inductive Step {Prim : Type} : Term Prim -> Term Prim -> Prop where
  | beta (x : Name) (M N : Term Prim) (_hN : Value N) :
    Step (Term.app (Term.lam x M) N) (subst x N M)
  | rec_beta (self arg : Name) (M N : Term Prim)
    (_hne : self != arg) (_hN : Value N) :
    Step (Term.app (Term.recLam self arg M) N)
      (subst arg N (subst self (Term.recLam self arg M) M))
  | intern_left (M N : Term Prim) :
    Step (Term.intern M N) M
  | intern_right (M N : Term Prim) :
    Step (Term.intern M N) N
  | app_left {M M' N : Term Prim} :
    Step M M' -> Step (Term.app M N) (Term.app M' N)
  | app_right {M N N' : Term Prim} (_hM : Value M) :
    Step N N' -> Step (Term.app M N) (Term.app M N')

```

```

/-- A probabilistic transition, including its branch weight. -/
inductive WeightedStep {Prim : Type} : Term Prim -> Prob -> Term Prim -> Prop where
| prob_left (p : Prob) (M N : Term Prim) (_hp_0 : 0 <= p) (_hp_1 : p <= 1) :
  WeightedStep (.prob p M N) p M
| prob_right (p : Prob) (M N : Term Prim) (_hp_0 : 0 <= p) (_hp_1 : p <= 1) :
  WeightedStep (.prob p M N) (1 - p) N
| app_left {M M' N : Term Prim} {p : Prob} :
  WeightedStep M p M' -> WeightedStep (.app M N) p (.app M' N)
| app_right {M N N' : Term Prim} {p : Prob} (_hM : Value M) :
  WeightedStep N p N' -> WeightedStep (.app M N) p (.app M N')

/-- The environment selects a branch of external choice. -/
inductive ExternalStep {Prim : Type} : Bool -> Term Prim -> Term Prim -> Prop where
| left (M N : Term Prim) : ExternalStep false (.extern M N) M
| right (M N : Term Prim) : ExternalStep true (.extern M N) N

/-- Reflexive-transitive closure of `Step`. -/
inductive Reduces {Prim : Type} : Term Prim -> Term Prim -> Prop where
| refl (M : Term Prim) : Reduces M M
| tail {M N P : Term Prim} : Reduces M N -> Step N P -> Reduces M P

end QLambda

```

A.38 QLambda/PhysicalTheory.lean

279 lines.

Lean 4 source

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/
import QLambda.RoundedTheory

/-!
# Physical instruments as rounded token theories

Finite instruments determine theories of all strict coded observations
they satisfy. Rational density supplies the strict rounding witness.
-/

namespace QLambda

open Scott1972.ContinuousLattice

universe u v

namespace FiniteInstrumentComp.KrausPost

variable {n : Nat} {D : Type u} [CompleteLattice D]

/-- The quantum indicator of a Scott-open output observation. -/
noncomputable def indicator (U : OutputObservation D) : KrausPost n D := by
  classical
  exact
  { pred := fun d =>
    if d in U then KrausFamily.identity n else KrausFamily.zero
    mono := by
      intro d e hde
      by_cases hd : d in U

```



```

      * have he : e in U := U.isScottOpen.1 hde hd
      simp [hd, he, KrausFamily.residualRefines_refl]
    * by_cases he : e in U
      * simp only [hd, he, reduceIte]
      refine <KrausFamily.identity n, ?_>
      intro ?
      simp [KrausFamily.zero]
      * simp [hd, he, KrausFamily.residualRefines_refl] }

end FiniteInstrumentComp.KrausPost

namespace CodedAtom

variable {n : Nat} {? : Type v} {D : Type u} [CompleteLattice D]

/-- Every satisfied strict rational atom has a strictly stronger
rational threshold which is still satisfied. -/
theorem exists_stronglyBelow_holds (C : OutputCode ? D)
  (? : FiniteInstrumentComp n D) {a : CodedAtom n ?}
  (ha : Holds C a ?) :
  exists b, StronglyBelow a b /\ Holds C b ? := by
  have hlt :
    (a.1.2.1 : ?) <
    a.1.eval (?observationChoi (C.observe a.2)) := by
  exact ha
  obtain <q, haq, hqeval> := exists_rat_btwn hlt
  have hq0 : 0 <= q := by
    have ha0 : (0 : ?) <= (a.1.2.1 : ?) := by
      exact_mod_cast a.1.2.2
    have hq0r : (0 : ?) <= (q : ?) := ha0.trans haq.le
    exact_mod_cast hq0r
  let b : CodedAtom n ? := ((a.1.1, <q, hq0>), a.2)
  refine <b, ?_, ?_>
  * exact <rfl, rfl, by
    dsimp [b]
    exact_mod_cast haq>
  * change (q : ?) <
    a.1.eval (?observationChoi (C.observe a.2))
    exact hqeval

end CodedAtom

namespace CodedToken

variable {n : Nat} {? : Type v} {D : Type u} [CompleteLattice D]

/-- Strictly strengthen all conjuncts of a satisfied finite token. -/
theorem exists_stronglyBelow_holds (C : OutputCode ? D)
  (? : FiniteInstrumentComp n D) {t : CodedToken n ?}
  (ht : Holds C t ?) :
  exists s, StronglyBelow t s /\ Holds C s ? := by
  induction t with
  | nil =>
    exact <[], by simp [StronglyBelow], by
      rw [holds_iff]
      simp>
  | cons a t ih =>
    have htc : forall x in a :: t, CodedAtom.Holds C x ? :=
      (holds_iff C (a :: t) ?).mp ht
    have ha : CodedAtom.Holds C a ? := by
      exact htc a (by simp)
    have ht' : Holds C t ? := by
      rw [holds_iff]

```

```

    intro x hx
    exact htc x (by simp [hx])
  obtain <b, hab, hb> := CodedAtom.exists_stronglyBelow_holds C ? ha
  obtain <s, hts, hs> := ih ht'
  refine <b :: s, ?_, ?_>
  * intro x hx
    rcases List.mem_cons.mp hx with rfl | hx
    * exact <b, by simp, hab>
    * obtain <y, hy, hxy> := hts x hx
      exact <y, by simp [hy], hxy>
  * rw [holds_iff]
    intro y hy
    rcases List.mem_cons.mp hy with rfl | hy
    * exact hb
    * rw [holds_iff] at hs
      exact hs y hy

end CodedToken

namespace FiniteInstrumentComp

variable {n : Nat} {D : Type u} [CompleteLattice D]
variable {? : Type v}

/-- The weakest precondition against a Scott-open indicator has exactly
the Choi denotation selected by that observation. -/
theorem choi_wpKraus_indicator (? : FiniteInstrumentComp n D)
  (U : OutputObservation D) :
  KrausFamily.choi (?wpKraus (KrausPost.indicator U)) =
    ?.observationChoi U := by
  classical
  rw [observationChoi_eq_testChoi]
  unfold wpKraus testChoi KrausPost.indicator
  rw [choi_flatMap]
  rw [ <- List.sum_toFinset
    (fun o : ?.Outcome =>
      KrausFamily.choi
        (KrausFamily.comp
          (if ?.value o in U then KrausFamily.identity n else KrausFamily.zero)
          (?.branch o)))
    (Finset.nodup_toList Finset.univ) ]
  have huniv : (Finset.univ.toList.toFinset : Finset ?.Outcome) =
    Finset.univ := by
  ext o
  simp
  rw [huniv]
  apply Finset.sum_congr rfl
  intro o ho
  by_cases hU : ?.value o in U
  * simp [hU]
  * simp [hU, KrausFamily.zero, KrausFamily.comp]

/-- TT refinement implies pointwise Choi observational refinement. -/
theorem observationRefines_of_refines {? ? : FiniteInstrumentComp n D}
  (h?? : Refines ? ?) : ObservationRefines ? ? := by
  intro U
  have hwp := h?? (KrausPost.indicator U)
  have hchoi := KrausFamily.choiRefines_of_residualRefines hwp
  rw [KrausFamily.ChoiRefines, choi_wpKraus_indicator,
    choi_wpKraus_indicator] at hchoi
  exact hchoi

/-- The rounded theory of all coded strict observations satisfied by a

```

```

finite physical instrument. -/
def satisfiedTheory (C : OutputCode ? D) (? : FiniteInstrumentComp n D) :
  TokenTheory n C where
  carrier := {t | CodedToken.Holds C t ?}
  rounded := by
    apply Set.Subset.antisymm
    * rintro t <s, hs, hts>
      exact CodedToken.roundedBelow_entails C hts ? hs
    * intro t ht
      obtain <s, hts, hs> :=
        CodedToken.exists_stronglyBelow_holds C ? ht
      exact <s, hs, <t, CodedToken.entails_refl C t, hts>>

@[simp]
theorem mem_satisfiedTheory (C : OutputCode ? D)
  (? : FiniteInstrumentComp n D) (t : CodedToken n ?) :
  t in ?.satisfiedTheory C <-> CodedToken.Holds C t ? :=
  Iff.rfl

/-- Pointwise Choi refinement preserves every coded strict token and
therefore induces inclusion of satisfied theories. -/
theorem observationRefines_satisfiedTheory_le
  (C : OutputCode ? D) {? ? : FiniteInstrumentComp n D}
  (h?? : ObservationRefines ? ?) :
  ?.satisfiedTheory C <= ?.satisfiedTheory C := by
  intro t ht
  change CodedToken.Holds C t ?
  exact h??.token_holds ht

/-- TT refinement therefore implies inclusion of every satisfied token
theory. -/
theorem satisfiedTheory_le_of_refines
  (C : OutputCode ? D) {? ? : FiniteInstrumentComp n D}
  (h?? : Refines ? ?) :
  ?.satisfiedTheory C <= ?.satisfiedTheory C :=
  observationRefines_satisfiedTheory_le C
  (observationRefines_of_refines h??)

/-- Inclusion of satisfied theories over the finite-union output basis
recovers pointwise Choi refinement. -/
theorem observationRefines_of_satisfiedTheory_le [IsOmegaQVA D]
  {? ? : FiniteInstrumentComp n D}
  (h :
    ?.satisfiedTheory
      (CountableOutputBasis.ofOmegaQVAFiniteUnion (D := D)).code <=
        ?.satisfiedTheory
          (CountableOutputBasis.ofOmegaQVAFiniteUnion (D := D)).code) :
    ObservationRefines ? ? := by
  intro U
  obtain <k, hkU, h?, h?> :=
    exists_pair_coded_observationChoi_eq ? ? U
  rw [ <- h?, <- h?]
  let C := (CountableOutputBasis.ofOmegaQVAFiniteUnion (D := D)).code
  let V := C.observe k
  apply ChoiTest.le_of_rational_quadratic_le
    (?observationChoi_posSemidef V).1
    (?observationChoi_posSemidef V).1
  intro v
  by_contra hle
  have hlt :
    ChoiTest.eval (v, <0, le_refl>) (?observationChoi V) <
    ChoiTest.eval (v, <0, le_refl>) (?observationChoi V) :=
    lt_of_not_ge hle

```

```

obtain <q, h?q, hq?> := exists_rat_btwn hlt
have hq0 : 0 <= q := by
  have h?0 :
    0 <= ChoiTest.eval (v, <0, le_rfl>)
    (?observationChoi V) :=
    ChoiTest.eval_nonneg _ (?observationChoi_posSemidef V)
  have hq0r : (0 : ?) <= (q : ?) := h?0.trans h?q.le
  exact_mod_cast hq0r
let a : CodedAtom n Nat := ((v, <q, hq0>), k)
have h?a : CodedToken.Holds C [a] ? := by
  rw [CodedToken.holds_iff]
  intro b hb
  simp only [List.mem_singleton] at hb
  subst b
  exact hq?
have h?a : CodedToken.Holds C [a] ? := by
  exact h h?a
rw [CodedToken.holds_iff] at h?a
have := h?a a (by simp)
exact (not_lt_of_ge h?q.le) this

theorem satisfiedTheory_le_iff_observationRefines [IsOmegaQVA D]
  {? ? : FiniteInstrumentComp n D} :
  ?.satisfiedTheory
    (CountableOutputBasis.ofOmegaQVAFiniteUnion (D := D)).code <=
    ?.satisfiedTheory
    (CountableOutputBasis.ofOmegaQVAFiniteUnion (D := D)).code <->
    ObservationRefines ? ? := by
  constructor
  * exact observationRefines_of_satisfiedTheory_le
  * intro h
    exact observationRefines_satisfiedTheory_le _ h

/-- Equality in the physical embedding is exactly mutual pointwise Choi
refinement. -/
theorem satisfiedTheory_eq_iff_observationEquivalent [IsOmegaQVA D]
  {? ? : FiniteInstrumentComp n D} :
  ?.satisfiedTheory
    (CountableOutputBasis.ofOmegaQVAFiniteUnion (D := D)).code =
    ?.satisfiedTheory
    (CountableOutputBasis.ofOmegaQVAFiniteUnion (D := D)).code <->
    ObservationRefines ? ? /\ ObservationRefines ? ? := by
  constructor
  * intro h
    constructor
    * apply observationRefines_of_satisfiedTheory_le
      exact h.le
    * apply observationRefines_of_satisfiedTheory_le
      exact h.ge
  * rintro <h??. h??>
    apply le_antisymm
    * exact observationRefines_satisfiedTheory_le _ h??
    * exact observationRefines_satisfiedTheory_le _ h??

end FiniteInstrumentComp

end QLambda

```

A.39 QLambda/QDomain.lean

207 lines.

Lean 4 source

```
/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/
import QLambda.QuantumPower
import Scott1972.ContinuousLattice.FunctionSpaceTower
import Scott1972.ContinuousLattice.InverseLimits

/-!
# Quantum domains and the tower  $D_{n+1} = [D_n \rightarrow Q(D_n)]$ 

A  $QDomain$  is a pointed object of  $?QVA$ . The tower and its inverse
limit are formed for  $F(X) = [X \rightarrow Q(X)]$  relative to a bundled
 $QuantumPowerModel$  (a  $Q$  that is an instance of
 $IsQuantumPowerModel$ ), not Scott's  $X \mapsto [X \rightarrow X]$ .
-/

namespace Scott1972.ContinuousLattice

universe u

set_option autoImplicit false
set_option relaxedAutoImplicit false

/-- A pointed object of  $?QVA$ . -/
structure QDomain : Type (u + 1) where
  carrier : Type u
  [str : CompleteLattice carrier]
  omega : IsOmegaQVA carrier

attribute [instance] QDomain.str

/-- The quantum tower  $D_{n+1} = [D_n \rightarrow Q(D_n)]$  as bundled lattices. -/
noncomputable def qTowerCLat (M : QuantumPowerModel) (D_0 : CLat.{u}) : Nat → CLat.{u}
| 0 => D_0
| n + 1 =>
  <ScottMap (qTowerCLat M D_0 n).carrier (QuantumPower M (qTowerCLat M D_0 n).carrier)>

/-- The carrier  $D_n$  of the quantum tower. -/
def qTowerType (M : QuantumPowerModel) (D_0 : CLat.{u}) (n : Nat) : Type u :=
  (qTowerCLat M D_0 n).carrier

noncomputable instance qTowerCompleteLattice (M : QuantumPowerModel) (D_0 : CLat.{u})
  (n : Nat) : CompleteLattice (qTowerType M D_0 n) :=
  (qTowerCLat M D_0 n).str

@[simp] theorem qTowerType_zero (M : QuantumPowerModel) (D_0 : CLat.{u}) :
  qTowerType M D_0 0 = D_0.carrier :=
  rfl

theorem qTowerType_succ (M : QuantumPowerModel) (D_0 : CLat.{u}) (n : Nat) :
  qTowerType M D_0 (n + 1) =
    ScottMap (qTowerType M D_0 n) (QuantumPower M (qTowerType M D_0 n)) :=
  rfl

/-- View an element of  $D_{n+1}$  as the Scott map  $[D_n \rightarrow Q(D_n)]$  it is. -/
def qTowerToMap (M : QuantumPowerModel) (D_0 : CLat.{u}) {n : Nat}
  (f : qTowerType M D_0 (n + 1)) :
  ScottMap (qTowerType M D_0 n) (QuantumPower M (qTowerType M D_0 n)) :=
  f
```

```

instance qTowerCoeFun (M : QuantumPowerModel) (D_0 : CLat.{u}) {n : Nat} :
  CoeFun (qTowerType M D_0 (n + 1))
    (fun _ => qTowerType M D_0 n -> QuantumPower M (qTowerType M D_0 n)) where
  coe f := qTowerToMap M D_0 f

@[simp] theorem qTowerToMap_coe (M : QuantumPowerModel) (D_0 : CLat.{u}) {n : Nat}
  (f : qTowerType M D_0 (n + 1)) (x : qTowerType M D_0 n) :
  qTowerToMap M D_0 f x = f x :=
  rfl

/-- The quantum tower as a sequence of `QDomain`s. -/
noncomputable def qTower (M : QuantumPowerModel) (D_0 : QDomain.{u}) : Nat -> QDomain.{u}
| 0 => D_0
| n + 1 =>
  { carrier := ScottMap (qTower M D_0 n).carrier (QuantumPower M (qTower M D_0 n).carrier)
    omega :=
      omegaQVA_closed_under_functionSpace (qTower M D_0 n).omega
      (omegaQVA_closed_under_quantumPower M (qTower M D_0 n).omega) }

@[simp] theorem qTower_zero (M : QuantumPowerModel) (D_0 : QDomain.{u}) :
  qTower M D_0 0 = D_0 :=
  rfl

theorem qTower_carrier_succ (M : QuantumPowerModel) (D_0 : QDomain.{u}) (n : Nat) :
  (qTower M D_0 (n + 1)).carrier =
  ScottMap (qTower M D_0 n).carrier (QuantumPower M (qTower M D_0 n).carrier) :=
  rfl

/-- Stageswise `QVA` instance on the quantum tower. -/
@[reducible] noncomputable def omegaOnqTower (M : QuantumPowerModel) (D_0 : QDomain.{u}) :
  (n : Nat) -> IsOmegaQVA (qTowerType M <D_0.carrier> n)
| 0 => D_0.omega
| n + 1 =>
  omegaQVA_closed_under_functionSpace (omegaOnqTower M D_0 n)
  (omegaQVA_closed_under_quantumPower M (omegaOnqTower M D_0 n))

/-! Mixed conjugation `f |-> post comp f comp pre` on `[D -> E]`, Scott-continuous
because directed suprema of Scott maps are pointwise. The diagonal case
`[Y -> Y]` is vendor `conjMap`; this is the form needed for `[X -> Q(X)]`. -/

section ConjHom

open Set

variable {D E F W : Type u} [CompleteLattice D] [CompleteLattice E]
[CompleteLattice F] [CompleteLattice W]

/-- Conjugation `f |-> post comp f comp pre` as a bare function. -/
def conjMapHomFun (post : ScottMap E F) (pre : ScottMap W D) (f : ScottMap D E) :
  ScottMap W F :=
  post.comp (f.comp pre)

theorem conjMapHom_preservesDirectedSup (post : ScottMap E F) (pre : ScottMap W D) :
  PreservesDirectedSup (conjMapHomFun post pre) := by
  intro S hS hSdir
  apply ScottMap.ext
  intro x
  have hdir : DirectedOn (* <= *) ((fun f : ScottMap D E => f (pre x)) '' S) := by
    rintro _ <a, ha, rfl> _ <b, hb, rfl>
    obtain <c, hc, hac, hbc> := hSdir a ha b hb
    exact <c (pre x), <c, hc, rfl>, hac (pre x), hbc (pre x)>
  show post ((sSup S : ScottMap D E) (pre x)) =
    (sSup (conjMapHomFun post pre '' S) : ScottMap W F) x

```

```

rw [ScottMap.sSup_apply S (pre x), post.preservesDirectedSup_coe _ (hS.image _) hdir,
  ScottMap.sSup_apply, Set.image_image, Set.image_image]
rfl

/-- Conjugation `f |-> post comp f comp pre` as a Scott map `[D -> E] -> [W -> F]`.
-/
noncomputable def conjMapHom (post : ScottMap E F) (pre : ScottMap W D) :
  ScottMap (ScottMap D E) (ScottMap W F) :=
  <conjMapHomFun post pre,
    continuous_of_preservesDirectedSup (conjMapHom_preservesDirectedSup post pre)>

@[simp] theorem conjMapHom_apply (post : ScottMap E F) (pre : ScottMap W D)
  (f : ScottMap D E) (x : W) :
  conjMapHom post pre f x = post (f (pre x)) :=
  rfl

end ConjHom

/-- **Proposition 3.7, mixed.** If `A ? B` and `QA ? QB`, then
`[A -> QA] ? [B -> QB]` via `f |-> i_Q comp f comp j` and `g |-> j_Q comp g comp
i`.
-/
noncomputable def IsContinuousLatticeProjection.quantumFunctionSpace
  {A B QA QB : Type u}
  [CompleteLattice A] [CompleteLattice B]
  [CompleteLattice QA] [CompleteLattice QB]
  (P : IsContinuousLatticeProjection A B)
  (PQ : IsContinuousLatticeProjection QA QB) :
  IsContinuousLatticeProjection (ScottMap A QA) (ScottMap B QB) where
incl := conjMapHom PQ.incl P.retr
retr := conjMapHom PQ.retr P.incl
retr_incl f := by
  apply ScottMap.ext
  intro x
  simp only [conjMapHom_apply, P.retr_incl, PQ.retr_incl]
incl_retr_le g := by
  rw [ScottMap.le_def]
  intro x
  simp only [conjMapHom_apply]
  exact le_trans (PQ.incl_retr_le _) (g.monotone (P.incl_retr_le x))

/-- Bonding projections `j_{n+1} = F(j_n)` for `F(X) = [X -> Q(X)]`.
-/
noncomputable def qTowerProj (M : QuantumPowerModel) (D_0 : CLat.{u})
  (j_0 : IsContinuousLatticeProjection D_0.carrier (QuantumFunctor M D_0.carrier)) :
  forall n, IsContinuousLatticeProjection (qTowerType M D_0 n) (qTowerType M D_0 (n + 1))
| 0 => j_0
| n + 1 =>
  (qTowerProj M D_0 j_0 n).quantumFunctionSpace
  (IsQuantumPowerModel.mapProjection (Q := M.Power) (qTowerProj M D_0 j_0 n))

theorem qTowerProj_zero (M : QuantumPowerModel) (D_0 : CLat.{u})
  (j_0 : IsContinuousLatticeProjection D_0.carrier (QuantumFunctor M D_0.carrier)) :
  qTowerProj M D_0 j_0 0 = j_0 :=
  rfl

theorem qTowerProj_succ (M : QuantumPowerModel) (D_0 : CLat.{u})
  (j_0 : IsContinuousLatticeProjection D_0.carrier (QuantumFunctor M D_0.carrier)) (n : Nat)
  :
  qTowerProj M D_0 j_0 (n + 1) =
  (qTowerProj M D_0 j_0 n).quantumFunctionSpace
  (IsQuantumPowerModel.mapProjection (Q := M.Power) (qTowerProj M D_0 j_0 n)) :=
  rfl

theorem qTowerProj_succ_incl_apply (M : QuantumPowerModel) (D_0 : CLat.{u})

```

```

(j_0 : IsContinuousLatticeProjection D_0.carrier (QuantumFunctor M D_0.carrier))
(n : Nat) (x : qTowerType M D_0 (n + 1)) (y : qTowerType M D_0 (n + 1)) :
qTowerToMap M D_0 ((qTowerProj M D_0 j_0 (n + 1)).incl x) y =
  IsQuantumPowerModel.map (Q := M.Power) (qTowerProj M D_0 j_0 n).incl
    (qTowerToMap M D_0 x ((qTowerProj M D_0 j_0 n).retr y)) :=
rfl

theorem qTowerProj_succ_retr_apply (M : QuantumPowerModel) (D_0 : CLat.{u})
(j_0 : IsContinuousLatticeProjection D_0.carrier (QuantumFunctor M D_0.carrier))
(n : Nat) (x' : qTowerType M D_0 (n + 2)) (y : qTowerType M D_0 n) :
qTowerToMap M D_0 ((qTowerProj M D_0 j_0 (n + 1)).retr x') y =
  IsQuantumPowerModel.map (Q := M.Power) (qTowerProj M D_0 j_0 n).retr
    (qTowerToMap M D_0 x' ((qTowerProj M D_0 j_0 n).incl y)) :=
rfl

/-- Inverse limit of the quantum tower. -/
abbrev QDInf (M : QuantumPowerModel) (D_0 : QDomain.{u})
(j_0 : IsContinuousLatticeProjection D_0.carrier (QuantumFunctor M D_0.carrier)) :
Type u :=
  InverseLimit (qTowerType M <D_0.carrier>) (qTowerProj M <D_0.carrier> j_0)

end Scott1972.ContinuousLattice

```

A.40 QLambda/QuantumDomainEquation.lean

598 lines.

Lean 4 source (lines 1–400)

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/
import QLambda.QuantumPower
import QLambda.QDomain
import Scott1972.ContinuousLattice.FunctionSpaceTower
import Scott1972.ContinuousLattice.InverseLimits

/-!
# The recursive quantum domain equation in `?QVA`

Parameterized theorem: for any `QuantumPowerModel`, the inverse limit
of `D_{n+1} = [D_n -> Q(D_n)]` lies in `?QVA` and solves
`D_inf ~=[D_inf -> Q(D_inf)]`. A concrete instrument instance is not
claimed until the Scott-complete carrier is constructed.
-/

namespace Scott1972.ContinuousLattice

universe u

set_option autoImplicit false
set_option relaxedAutoImplicit false

/-- Stage types of the quantum tower at `D_0`. -/
abbrev qD (M : QuantumPowerModel) (D_0 : QDomain.{u}) : Nat -> Type u :=
  qTowerType M <D_0.carrier>

/-- Bonding projections of the quantum tower at `D_0`. -/
noncomputable abbrev qP (M : QuantumPowerModel) (D_0 : QDomain.{u})
(j_0 : IsContinuousLatticeProjection D_0.carrier (QuantumFunctor M D_0.carrier)) :
  forall n, IsContinuousLatticeProjection (qD M D_0 n) (qD M D_0 (n + 1)) :=

```



```

qTowerProj M <D_0.carrier> j_0

/-- `Q` applied to a Scott map. -/
noncomputable abbrev qMap (M : QuantumPowerModel)
  {A B : Type u} [CompleteLattice A] [CompleteLattice B]
  (f : ScottMap A B) : ScottMap (QuantumPower M A) (QuantumPower M B) :=
  IsQuantumPowerModel.map (Q := M.Power) f

/-- `?QVA` structure on the inverse limit: retract of a countable
product of `?QVA` stages. Requires `qTowerProj`. -/
@[reducible] noncomputable def qDInf_isOmegaQVA (M : QuantumPowerModel) (D_0 : QDomain.{u})
  (j_0 : IsContinuousLatticeProjection D_0.carrier (QuantumFunctor M D_0.carrier)) :
  IsOmegaQVA (qDInf M D_0 j_0) :=
  letI : forall n, IsOmegaQVA (qTowerType M <D_0.carrier> n) := omegaOnQTower M D_0
  letI : IsOmegaQVA (forall n, qTowerType M <D_0.carrier> n) := omegaQVA_pi
  omegaQVA_of_retract
  (inverseLimitRetraction (qTowerType M <D_0.carrier>) (qTowerProj M <D_0.carrier> j_0))

section LimitMaps

variable (M : QuantumPowerModel) (D_0 : QDomain.{u})
  (j_0 : IsContinuousLatticeProjection D_0.carrier (QuantumFunctor M D_0.carrier))

/-- The `n`-th summand of `i_inf` : `x` |-> `Q(i_{n inf })` comp `x_{n+1}` comp `j_{inf n}`.
-/
noncomputable def qiInfTerm (n : Nat) :
  ScottMap (qDInf M D_0 j_0) (QuantumFunctor M (qDInf M D_0 j_0)) :=
  (conjMapHom (qMap M (embInf (qD M D_0) (qP M D_0 j_0) n))
    (projInf (qD M D_0) (qP M D_0 j_0) n)).comp
  (projInf (qD M D_0) (qP M D_0 j_0) (n + 1))

@[simp] theorem qiInfTerm_apply (n : Nat) (x z : qDInf M D_0 j_0) :
  (qiInfTerm M D_0 j_0 n x) z =
  qMap M (embInf (qD M D_0) (qP M D_0 j_0) n)
    ((x.1 (n + 1)) ((projInf (qD M D_0) (qP M D_0 j_0) n) z)) :=
  rfl

/-- Embedding `i_inf` : D_inf -> [D_inf -> Q(D_inf)]`. -/
noncomputable def qEmbInfInf :
  ScottMap (qDInf M D_0 j_0) (QuantumFunctor M (qDInf M D_0 j_0)) :=
  bigcup n, qiInfTerm M D_0 j_0 n

theorem qEmbInfInf_apply (x : qDInf M D_0 j_0) :
  qEmbInfInf M D_0 j_0 x = bigcup n, qiInfTerm M D_0 j_0 n x := by
  show (sSup (Set.range (qiInfTerm M D_0 j_0)) : ScottMap _ _) x = _
  rw [ScottMap.sSup_apply, <- Set.range_comp, sSup_range]
  rfl

/-- The `n`-th summand of `j_inf` : `f` |-> `i_{(n+1) inf }(Q(j_{inf n}))` comp `f` comp `i_{n inf }`. -/
noncomputable def qjInfTerm (n : Nat) :
  ScottMap (QuantumFunctor M (qDInf M D_0 j_0)) (qDInf M D_0 j_0) :=
  (embInf (qD M D_0) (qP M D_0 j_0) (n + 1)).comp
  (conjMapHom (qMap M (projInf (qD M D_0) (qP M D_0 j_0) n))
    (embInf (qD M D_0) (qP M D_0 j_0) n))

@[simp] theorem qjInfTerm_apply (n : Nat) (f : QuantumFunctor M (qDInf M D_0 j_0)) :
  qjInfTerm M D_0 j_0 n f =
  embInf (qD M D_0) (qP M D_0 j_0) (n + 1)
    (conjMapHom (qMap M (projInf (qD M D_0) (qP M D_0 j_0) n))
      (embInf (qD M D_0) (qP M D_0 j_0) n) f) :=
  rfl

```

```

/-- Projection `j_inf : [D_inf -> Q(D_inf)] -> D_inf`. -/
noncomputable def qProjInfInf :
  ScottMap (QuantumFunctor M (QDInf M D_0 j_0)) (QDInf M D_0 j_0) :=
  bigcup n, qjInfTerm M D_0 j_0 n

theorem qProjInfInf_apply (f : QuantumFunctor M (QDInf M D_0 j_0)) :
  qProjInfInf M D_0 j_0 f = bigcup n, qjInfTerm M D_0 j_0 n f := by
  show (sSup (Set.range (qjInfTerm M D_0 j_0)) : ScottMap _ _) f = _
  rw [ScottMap.sSup_apply, <- Set.range_comp, sSup_range]
  rfl

theorem conjMapHom_iSup (n : Nat)
  (post : ScottMap (QuantumPower M (QDInf M D_0 j_0)) (QuantumPower M (qD M D_0 n)))
  (pre : ScottMap (qD M D_0 n) (QDInf M D_0 j_0))
  (f : Nat -> ScottMap (QDInf M D_0 j_0) (QuantumPower M (QDInf M D_0 j_0)))
  (hf : Monotone f) :
  conjMapHom post pre (bigcup m, f m) = bigcup m, conjMapHom post pre (f m) := by
  have hdir : DirectedOn (* <= *) (Set.range f) :=
    directedOn_range.2 fun a b => <max a b, hf (le_max_left a b), hf (le_max_right a b)>
  have hne := Set.range_nonempty f
  rw [show (bigcup m, f m) = sSup (Set.range f) from sSup_range.symm,
    (conjMapHom post pre).preservesDirectedSup_coe (Set.range f) hne hdir, <- Set.range_comp]
  rfl

theorem embInf_succ_iSup_q (n : Nat) (f : Nat -> qD M D_0 (n + 1)) (hf : Monotone f) :
  embInf (qD M D_0) (qP M D_0 j_0) (n + 1) (bigcup m, f m) =
    bigcup m, embInf (qD M D_0) (qP M D_0 j_0) (n + 1) (f m) := by
  have hdir : DirectedOn (* <= *) (Set.range f) :=
    directedOn_range.2 fun a b => <max a b, hf (le_max_left a b), hf (le_max_right a b)>
  have hne := Set.range_nonempty f
  rw [show (bigcup m, f m) = sSup (Set.range f) from sSup_range.symm,
    (embInf (qD M D_0) (qP M D_0 j_0) (n + 1)).preservesDirectedSup_coe
    (Set.range f) hne hdir, <- Set.range_comp]
  rfl

/-- `Q(j_{inf n}) comp Q(i_{n inf}) comp x_{n+1} comp j_{inf n} comp i_{n inf} = x_{n+1}`. -/
theorem conj_qiInfTerm_eq (n : Nat) (x : QDInf M D_0 j_0) :
  conjMapHom (qMap M (projInf (qD M D_0) (qP M D_0 j_0) n))
    (embInf (qD M D_0) (qP M D_0 j_0) n)
    (qiInfTerm M D_0 j_0 n x) =
    x.1 (n + 1) := by
  apply ScottMap.ext
  intro y
  have hy : (projInf (qD M D_0) (qP M D_0 j_0) n)
    (embInf (qD M D_0) (qP M D_0 j_0) n y) = y :=
    (proposition_4_2 (qD M D_0) (qP M D_0 j_0) n).retr_incl y
  have hcomp := IsQuantumPowerModel.map_comp (Q := M.Power)
    (f := projInf (qD M D_0) (qP M D_0 j_0) n)
    (g := embInf (qD M D_0) (qP M D_0 j_0) n)
  have hid' := IsQuantumPowerModel.map_id (Q := M.Power) (D := qD M D_0 n)
  have hpair : (projInf (qD M D_0) (qP M D_0 j_0) n).comp
    (embInf (qD M D_0) (qP M D_0 j_0) n) = ScottMap.idMap :=
    ScottMap.ext fun z =>
      (proposition_4_2 (qD M D_0) (qP M D_0 j_0) n).retr_incl z
  have hQid : (qMap M (projInf (qD M D_0) (qP M D_0 j_0) n)).comp
    (qMap M (embInf (qD M D_0) (qP M D_0 j_0) n)) = ScottMap.idMap := by
    rw [ <- hcomp, hpair, hid' ]
  -- `conjMapHom post pre g y = post (g (pre y))`.
  change qMap M (projInf (qD M D_0) (qP M D_0 j_0) n)
    (qiInfTerm M D_0 j_0 n x (embInf (qD M D_0) (qP M D_0 j_0) n y)) =
    x.1 (n + 1) y
  rw [qiInfTerm_apply, hy]

```

```

exact congrArg (fun g : ScottMap _ _ =>
  (g : _ -> _) (qTowerToMap M <D_0.carrier> (x.1 (n + 1)) y)) hQid

theorem q_incl_projInf_le_projInf_succ (n : Nat) (w : QDInf M D_0 j_0) :
  (qP M D_0 j_0 n).incl (projInf (qD M D_0) (qP M D_0 j_0) n w) <=
    projInf (qD M D_0) (qP M D_0 j_0) (n + 1) w := by
  have h := (qP M D_0 j_0 n).incl_retr_le
    (projInf (qD M D_0) (qP M D_0 j_0) (n + 1) w)
  rwa [show (qP M D_0 j_0 n).retr (projInf (qD M D_0) (qP M D_0 j_0) (n + 1) w)
    = projInf (qD M D_0) (qP M D_0 j_0) n w from w.2 n] at h

theorem qiInfTerm_le_succ (x : QDInf M D_0 j_0) (m : Nat) :
  qiInfTerm M D_0 j_0 m x <= qiInfTerm M D_0 j_0 (m + 1) x := by
  rw [ScottMap.le_def]
  intro z
  -- `Q(i_{m inf }) = Q(i_{(m+1) inf })` comp `Q(i_m)` by `embInf_succ` and functoriality.
  have hclimb :
    qMap M (embInf (qD M D_0) (qP M D_0 j_0) m) =
      (qMap M (embInf (qD M D_0) (qP M D_0 j_0) (m + 1))).comp
        (qMap M (qP M D_0 j_0 m).incl) := by
  have hsucc : (embInf (qD M D_0) (qP M D_0 j_0) (m + 1)).comp
    (qP M D_0 j_0 m).incl =
      embInf (qD M D_0) (qP M D_0 j_0) m :=
    ScottMap.ext fun w => embInf_succ (qD M D_0) (qP M D_0 j_0) m w
  have hcomp := IsQuantumPowerModel.map_comp (Q := M.Power)
    (f := embInf (qD M D_0) (qP M D_0 j_0) (m + 1))
    (g := (qP M D_0 j_0 m).incl)
  rw [← hcomp, hsucc]
  have hab : (qP M D_0 j_0 m).incl (projInf (qD M D_0) (qP M D_0 j_0) m z) <=
    projInf (qD M D_0) (qP M D_0 j_0) (m + 1) z :=
    q_incl_projInf_le_projInf_succ M D_0 j_0 m z
  have hmid :
    qMap M (qP M D_0 j_0 m).incl
      ((x.1 (m + 1)) (projInf (qD M D_0) (qP M D_0 j_0) m z)) <=
      x.1 (m + 2) (projInf (qD M D_0) (qP M D_0 j_0) (m + 1) z) := by
  have hx : x.1 (m + 1) = (qP M D_0 j_0 (m + 1)).retr (x.1 (m + 2)) := (x.2 (m + 1)).symm
  calc
    qMap M (qP M D_0 j_0 m).incl
      ((x.1 (m + 1)) (projInf (qD M D_0) (qP M D_0 j_0) m z))
    = qMap M (qP M D_0 j_0 m).incl
      (((qP M D_0 j_0 (m + 1)).retr (x.1 (m + 2)))
        (projInf (qD M D_0) (qP M D_0 j_0) m z)) := by rw [hx]
    _ = qMap M (qP M D_0 j_0 m).incl
      (qMap M (qP M D_0 j_0 m).retr
        (x.1 (m + 2) ((qP M D_0 j_0 m).incl
          (projInf (qD M D_0) (qP M D_0 j_0) m z)))) := by
      rw [qTowerProj_succ_retr_apply]
    _ <= x.1 (m + 2) ((qP M D_0 j_0 m).incl
      (projInf (qD M D_0) (qP M D_0 j_0) m z)) :=
      (IsQuantumPowerModel.mapProjection (Q := M.Power) (qP M D_0 j_0 m)).incl_retr_le _
    _ <= x.1 (m + 2) (projInf (qD M D_0) (qP M D_0 j_0) (m + 1) z) :=
      ScottMap.monotone (x.1 (m + 2)) hab
  have hL :
    qiInfTerm M D_0 j_0 m x z =
      qMap M (embInf (qD M D_0) (qP M D_0 j_0) (m + 1))
        (qMap M (qP M D_0 j_0 m).incl
          ((x.1 (m + 1)) (projInf (qD M D_0) (qP M D_0 j_0) m z))) := by
    rw [qiInfTerm_apply, hclimb]
    rfl
  rw [hL, qiInfTerm_apply]
  exact (qMap M (embInf (qD M D_0) (qP M D_0 j_0) (m + 1))).monotone hmid

theorem qiInfTerm_monotone (x : QDInf M D_0 j_0) :

```

```

Monotone (fun m => qiInfTerm M D_0 j_0 m x) :=
monotone_nat_of_le_succ (qiInfTerm_le_succ M D_0 j_0 x)

theorem q_iSup_2_monotone_eq_diagonal {a : Type*} [CompleteLattice a] (f : Nat -> Nat -> a)
(hfm : forall n, Monotone (f n)) (hfn : forall m, Monotone (fun n => f n m)) :
bigcup n, bigcup m, f n m = bigcup n, f n n := by
apply le_antisymm
* refine iSup_le fun n => iSup_le fun m => ?_
have hk : n <= n sqsup m := le_sup_left
have hk' : m <= n sqsup m := le_sup_right
calc f n m <= f (n sqsup m) m := hfn m hk
_ <= f (n sqsup m) (n sqsup m) := hfm (n sqsup m) hk'
_ <= bigcup n', f n' n' := le_iSup (fun n' => f n' n') (n sqsup m)
* refine iSup_le fun n => le_trans (le_iSup (f n) n) (le_iSup (fun n' => bigcup m, f n' m)
n)

theorem conjMapHom_incl_le_conjMapHom_succ (n : Nat)
(f : QuantumFunctor M (QDInf M D_0 j_0)) :
(qP M D_0 j_0 (n + 1)).incl
(conjMapHom (qMap M (projInf (qD M D_0) (qP M D_0 j_0) n))
(embInf (qD M D_0) (qP M D_0 j_0) n) f) <=
conjMapHom (qMap M (projInf (qD M D_0) (qP M D_0 j_0) (n + 1)))
(embInf (qD M D_0) (qP M D_0 j_0) (n + 1)) f := by
refine ScottMap.le_def.mpr fun y => ?_
-- `incl_{n+1}(g) y = Q(incl_n) (g (retr_n y))`
change qMap M (qP M D_0 j_0 n).incl
(qMap M (projInf (qD M D_0) (qP M D_0 j_0) n)
(f (embInf (qD M D_0) (qP M D_0 j_0) n ((qP M D_0 j_0 n).retr y)))) <=
qMap M (projInf (qD M D_0) (qP M D_0 j_0) (n + 1))
(f (embInf (qD M D_0) (qP M D_0 j_0) (n + 1) y))
have hpre : embInf (qD M D_0) (qP M D_0 j_0) n ((qP M D_0 j_0 n).retr y) <=
embInf (qD M D_0) (qP M D_0 j_0) (n + 1) y := by
rw [ <- embInf_succ (qD M D_0) (qP M D_0 j_0) n ((qP M D_0 j_0 n).retr y)]
exact embInf_monotone (qD M D_0) (qP M D_0 j_0) (n + 1)
((qP M D_0 j_0 n).incl_retr_le y)
have h1 : qMap M (qP M D_0 j_0 n).incl
(qMap M (projInf (qD M D_0) (qP M D_0 j_0) n)
(f (embInf (qD M D_0) (qP M D_0 j_0) n ((qP M D_0 j_0 n).retr y)))) <=
qMap M (qP M D_0 j_0 n).incl
(qMap M (projInf (qD M D_0) (qP M D_0 j_0) n)
(f (embInf (qD M D_0) (qP M D_0 j_0) (n + 1) y))) :=
(qMap M (qP M D_0 j_0 n).incl).monotone
((qMap M (projInf (qD M D_0) (qP M D_0 j_0) n)).monotone (f.monotone hpre))
refine le_trans h1 ?_
-- `(i_n) comp Q(j_{inf n}) sqsub Q(j_{inf (n+1)})` at `f (i_{(n+1) inf } y)`
have hpair : (qP M D_0 j_0 n).incl.comp
(projInf (qD M D_0) (qP M D_0 j_0) n) <=
projInf (qD M D_0) (qP M D_0 j_0) (n + 1) := by
intro w
exact q_incl_projInf_le_projInf_succ M D_0 j_0 n w
have hQ : qMap M ((qP M D_0 j_0 n).incl.comp
(projInf (qD M D_0) (qP M D_0 j_0) n)) <=
qMap M (projInf (qD M D_0) (qP M D_0 j_0) (n + 1)) :=
IsQuantumPowerModel.map_mono (Q := M.Power) hpair
have hcomp := IsQuantumPowerModel.map_comp (Q := M.Power)
(f := (qP M D_0 j_0 n).incl)
(g := projInf (qD M D_0) (qP M D_0 j_0) n)
have : (qMap M (qP M D_0 j_0 n).incl).comp
(qMap M (projInf (qD M D_0) (qP M D_0 j_0) n)) <=
qMap M (projInf (qD M D_0) (qP M D_0 j_0) (n + 1)) := by
rw [ <- hcomp]
exact hQ
exact this (f (embInf (qD M D_0) (qP M D_0 j_0) (n + 1) y))

```

```

theorem qProjInfInf_qEmbInfInf_eq (x : QDInf M D_0 j_0) :
  qProjInfInf M D_0 j_0 (qEmbInfInf M D_0 j_0 x) =
    bigcup n, embInf (qD M D_0) (qP M D_0 j_0) (n + 1) (x.1 (n + 1)) := by
  rw [qProjInfInf_apply]
  set g := fun n m =>
    embInf (qD M D_0) (qP M D_0 j_0) (n + 1)
      (conjMapHom (qMap M (projInf (qD M D_0) (qP M D_0 j_0) n))
        (embInf (qD M D_0) (qP M D_0 j_0) n)
        (qiInfTerm M D_0 j_0 m x)) with hg
  have hmono (n : Nat) : Monotone (fun m =>
    conjMapHom (qMap M (projInf (qD M D_0) (qP M D_0 j_0) n))
      (embInf (qD M D_0) (qP M D_0 j_0) n)
      (qiInfTerm M D_0 j_0 m x)) := fun a b hab =>
    (conjMapHom (qMap M (projInf (qD M D_0) (qP M D_0 j_0) n))
      (embInf (qD M D_0) (qP M D_0 j_0) n)).monotone
      (ScottMap.le_def.mpr (qiInfTerm_monotone M D_0 j_0 x hab))
  have hinner (n : Nat) : qjInfTerm M D_0 j_0 n (qEmbInfInf M D_0 j_0 x) = bigcup m, g n m :=
    calc qjInfTerm M D_0 j_0 n (qEmbInfInf M D_0 j_0 x)
      = embInf (qD M D_0) (qP M D_0 j_0) (n + 1)
        (bigcup m, conjMapHom (qMap M (projInf (qD M D_0) (qP M D_0 j_0) n))
          (embInf (qD M D_0) (qP M D_0 j_0) n)
          (qiInfTerm M D_0 j_0 m x)) := by
      rw [qjInfTerm_apply, qEmbInfInf_apply,
        conjMapHom_iSup M D_0 j_0 n
          (qMap M (projInf (qD M D_0) (qP M D_0 j_0) n))
          (embInf (qD M D_0) (qP M D_0 j_0) n)
          (fun m => qiInfTerm M D_0 j_0 m x) (qiInfTerm_monotone M D_0 j_0 x)]
      rfl
    _ = bigcup m, embInf (qD M D_0) (qP M D_0 j_0) (n + 1)
      (conjMapHom (qMap M (projInf (qD M D_0) (qP M D_0 j_0) n))
        (embInf (qD M D_0) (qP M D_0 j_0) n)
        (qiInfTerm M D_0 j_0 m x)) :=
      embInf_succ_iSup_q M D_0 j_0 n _ (hmono n)
    _ = bigcup m, g n m := by simp only [hg]
  have g_mono_m (n : Nat) : Monotone (g n) := by
    intro a b hab
    rw [hg]
    exact (embInf (qD M D_0) (qP M D_0 j_0) (n + 1)).monotone
      ((conjMapHom (qMap M (projInf (qD M D_0) (qP M D_0 j_0) n))
        (embInf (qD M D_0) (qP M D_0 j_0) n)).monotone
        (ScottMap.le_def.mpr (qiInfTerm_monotone M D_0 j_0 x hab)))
  have g_mono_n_succ (m n : Nat) : g n m <= g (n + 1) m := by
    rw [hg]
    dsimp only
    rw [ <- embInf_succ (qD M D_0) (qP M D_0 j_0) (n + 1)
      (conjMapHom (qMap M (projInf (qD M D_0) (qP M D_0 j_0) n))
        (embInf (qD M D_0) (qP M D_0 j_0) n)
        (qiInfTerm M D_0 j_0 m x))]
    exact embInf_monotone (qD M D_0) (qP M D_0 j_0) (n + 2)
      (conjMapHom_incl_le_conjMapHom_succ M D_0 j_0 n (qiInfTerm M D_0 j_0 m x))
  have g_mono_n (m : Nat) : Monotone (fun n => g n m) :=
    monotone_nat_of_le_succ (g_mono_n_succ m)
  have hin : (bigcup n, qjInfTerm M D_0 j_0 n (qEmbInfInf M D_0 j_0 x)) = bigcup n, bigcup
    m, g n m := by
    congr 1
    funext n
    exact hinner n
  rw [hin, q_iSup_2_monotone_eq_diagonal g g_mono_m g_mono_n]
  congr 1
  funext n
  rw [hg]
  dsimp only

```

```

rw [conj_qiInfTerm_eq M D_0 j_0 n x]

theorem qProjInfInf_comp_qEmbInfInf :
  (qProjInfInf M D_0 j_0).comp (qEmbInfInf M D_0 j_0) = ScottMap.idMap := by
  apply ScottMap.ext
  intro x
  have hmono : Monotone (fun k => embInf (qD M D_0) (qP M D_0 j_0) k (x.1 k)) :=
    monotone_nat_of_le_succ (embInf_le_succ (qD M D_0) (qP M D_0 j_0) x)
  rw [ScottMap.comp_apply, ScottMap.idMap_apply, qProjInfInf_qEmbInfInf_eq M D_0 j_0 x,
    Monotone.iSup_nat_add hmono 1]
  exact (inverseLimit_eq_iSup (qD M D_0) (qP M D_0 j_0) x).symm

theorem qTowerProj_retr_conjMapHom_succ (n : Nat)
  (f : QuantumFunctor M (QDInf M D_0 j_0)) :
  (qP M D_0 j_0 (n + 1)).retr
    (conjMapHom (qMap M (projInf (qD M D_0) (qP M D_0 j_0) (n + 1)))
      (embInf (qD M D_0) (qP M D_0 j_0) (n + 1)) f) =
    conjMapHom (qMap M (projInf (qD M D_0) (qP M D_0 j_0) n))
      (embInf (qD M D_0) (qP M D_0 j_0) n) f := by
  apply ScottMap.ext
  intro y
  -- `retr_{n+1}(g) y = Q(retr_n) (g (incl_n y))`
  change qMap M (qP M D_0 j_0 n).retr
    (qMap M (projInf (qD M D_0) (qP M D_0 j_0) (n + 1))
      (f (embInf (qD M D_0) (qP M D_0 j_0) (n + 1) ((qP M D_0 j_0 n).incl y)))) =
    qMap M (projInf (qD M D_0) (qP M D_0 j_0) n)
      (f (embInf (qD M D_0) (qP M D_0 j_0) n y))
  -- `i_{(n+1) inf } comp i_n = i_{n inf }` and `j_{ inf n} = j_n comp j_{ inf (n+1)}`.
  rw [embInf_succ (qD M D_0) (qP M D_0 j_0) n y]
  -- `j_{ inf n} w = retr_n (j_{ inf (n+1)} w)` , so
  -- `Q(j_{ inf n}) = Q(retr_n comp Q(j_{ inf (n+1)}))`.
  have hproj : projInf (qD M D_0) (qP M D_0 j_0) n =
    (qP M D_0 j_0 n).retr.comp
      (projInf (qD M D_0) (qP M D_0 j_0) (n + 1)) :=
    ScottMap.ext fun w => (w.2 n).symm |> rfl
  -- After `embInf_succ`, the argument of `f` matches, so this is
  -- `Q(retr_n) (Q(j_{ inf (n+1)})) (f (i_{n inf } y)) = Q(j_{ inf n}) (f (i_{n inf } y))`.
  have hQ : qMap M (qP M D_0 j_0 n).retr comp
    qMap M (projInf (qD M D_0) (qP M D_0 j_0) (n + 1)) =
    qMap M (projInf (qD M D_0) (qP M D_0 j_0) n) := by
  have hcomp := IsQuantumPowerModel.map_comp (Q := M.Power)
    (f := (qP M D_0 j_0 n).retr)
    (g := projInf (qD M D_0) (qP M D_0 j_0) (n + 1))
  have : (qMap M (qP M D_0 j_0 n).retr).comp
    (qMap M (projInf (qD M D_0) (qP M D_0 j_0) (n + 1))) =
    qMap M (projInf (qD M D_0) (qP M D_0 j_0) n) := by
  rw [← hcomp, ← hproj]
  exact funext fun z => congrArg (fun g : ScottMap _ _ => (g : _ -> _) z) this
  exact congrArg (fun g => g (f (embInf (qD M D_0) (qP M D_0 j_0) n y))) hQ

theorem qEmbInfInf_comp_qProjInfInf :
  (qEmbInfInf M D_0 j_0).comp (qProjInfInf M D_0 j_0) = ScottMap.idMap := by
  apply ScottMap.ext
  intro f
  rw [ScottMap.comp_apply, ScottMap.idMap_apply]
  apply ScottMap.ext

```

Lean 4 source (lines 401–598)

```

intro z
set r : Nat -> ScottMap (QDInf M D_0 j_0) (QDInf M D_0 j_0) :=
  fun n => (embInf (qD M D_0) (qP M D_0 j_0) n).comp
    (projInf (qD M D_0) (qP M D_0 j_0) n) with hr
have hrw : forall n (w : QDInf M D_0 j_0), r n w

```

```

    = embInf (qD M D_0) (qP M D_0 j_0) n
      (projInf (qD M D_0) (qP M D_0 j_0) n w) := by
  intro n w
  simp only [hr, ScottMap.comp_apply]
have hr_mono : forall (w : QDInf M D_0 j_0), Monotone (fun m => r m w) := by
  intro w
  refine monotone_nat_of_le_succ (fun m => ?_)
  show r m w <= r (m + 1) w
  rw [hrw, hrw]
  exact embInf_le_succ (qD M D_0) (qP M D_0 j_0) w m
have hA : forall (w : QDInf M D_0 j_0), w = bigcup m, r m w := by
  intro w
  have h1 : (bigcup m, r m w)
    = bigcup m, embInf (qD M D_0) (qP M D_0 j_0) m
      (projInf (qD M D_0) (qP M D_0 j_0) m w) :=
    iSup_congr (fun m => hrw m w)
  rw [h1]
  exact inverseLimit_eq_iSup (qD M D_0) (qP M D_0 j_0) w
have hsup_apply : forall (g : Nat -> ScottMap (QDInf M D_0 j_0) (QuantumPower M (QDInf M
D_0 j_0)))
  (w : QDInf M D_0 j_0),
  (bigcup n, g n) w = bigcup n, g n w := by
  intro g w
  rw [show (bigcup n, g n) = sSup (Set.range g) from sSup_range.symm,
    ScottMap.sSup_apply, <- Set.range_comp, sSup_range]
  rfl
have hcontD : forall (g : ScottMap (QDInf M D_0 j_0) (QDInf M D_0 j_0))
  (a : Nat -> QDInf M D_0 j_0),
  Monotone a -> g (bigcup m, a m) = bigcup m, g (a m) := by
  intro g a ha
  have hdir : DirectedOn (* <= *) (Set.range a) :=
    directedOn_range.2 fun i j => <max i j, ha (le_max_left i j), ha (le_max_right i j)>
  rw [show (bigcup m, a m) = sSup (Set.range a) from sSup_range.symm,
    g.preservesDirectedSup_coe (Set.range a) (Set.range_nonempty a) hdir,
    <- Set.range_comp, sSup_range]
  rfl
have hcontQ : forall (g : ScottMap (QDInf M D_0 j_0) (QuantumPower M (QDInf M D_0 j_0)))
  (a : Nat -> QDInf M D_0 j_0),
  Monotone a -> g (bigcup m, a m) = bigcup m, g (a m) := by
  intro g a ha
  have hdir : DirectedOn (* <= *) (Set.range a) :=
    directedOn_range.2 fun i j => <max i j, ha (le_max_left i j), ha (le_max_right i j)>
  rw [show (bigcup m, a m) = sSup (Set.range a) from sSup_range.symm,
    g.preservesDirectedSup_coe (Set.range a) (Set.range_nonempty a) hdir,
    <- Set.range_comp, sSup_range]
  rfl
have hpi : qProjInfInf M D_0 j_0 f
  = bigcup k, embInf (qD M D_0) (qP M D_0 j_0) (k + 1)
    (conjMapHom (qMap M (projInf (qD M D_0) (qP M D_0 j_0) k))
      (embInf (qD M D_0) (qP M D_0 j_0) k) f) := by
  rw [qProjInfInf_apply]
  exact iSup_congr (fun n => qjInfTerm_apply M D_0 j_0 n f)
have hcoord : forall n, (qProjInfInf M D_0 j_0 f).1 (n + 1)
  = conjMapHom (qMap M (projInf (qD M D_0) (qP M D_0 j_0) n))
    (embInf (qD M D_0) (qP M D_0 j_0) n) f := by
  intro n
  rw [hpi]
  exact lemma_4_5 (qD M D_0) (qP M D_0 j_0)
    (fun k => conjMapHom (qMap M (projInf (qD M D_0) (qP M D_0 j_0) k))
      (embInf (qD M D_0) (qP M D_0 j_0) k) f)
    (fun m => qTowerProj_retr_conjMapHom_succ M D_0 j_0 m f) n
have hev : qEmbInfInf M D_0 j_0 (qProjInfInf M D_0 j_0 f) z
  = bigcup n, (qiInfTerm M D_0 j_0 n (qProjInfInf M D_0 j_0 f)) z := by

```

```

    rw [qEmbInfInf_apply]
    exact hsup_apply (fun n => qiInfTerm M D_0 j_0 n (qProjInfInf M D_0 j_0 f)) z
-- Each summand is `Q(r_n) (f (r_n z))`.
have hterm : forall n,
  (qiInfTerm M D_0 j_0 n (qProjInfInf M D_0 j_0 f)) z =
    qMap M (r n) (f (r n z)) := by
  intro n
  rw [qiInfTerm_apply, hcoord n]
  -- `Q(i_{n inf j}) comp Q(j_{inf n}) = Q(r_n)`
  have hrn : r n = (embInf (qD M D_0) (qP M D_0 j_0) n).comp
    (projInf (qD M D_0) (qP M D_0 j_0) n) := rfl
  have hQ : qMap M (embInf (qD M D_0) (qP M D_0 j_0) n) comp
    qMap M (projInf (qD M D_0) (qP M D_0 j_0) n) =
    qMap M (r n) := by
    have hcomp := IsQuantumPowerModel.map_comp (Q := M.Power)
      (f := embInf (qD M D_0) (qP M D_0 j_0) n)
      (g := projInf (qD M D_0) (qP M D_0 j_0) n)
    have : (qMap M (embInf (qD M D_0) (qP M D_0 j_0) n)).comp
      (qMap M (projInf (qD M D_0) (qP M D_0 j_0) n)) =
      qMap M (r n) := by
      rw [← hcomp]
    exact funext fun t => congrArg (fun g : ScottMap _ _ => (g : _ -> _) t) this
  change qMap M (embInf (qD M D_0) (qP M D_0 j_0) n)
    (qMap M (projInf (qD M D_0) (qP M D_0 j_0) n)
      (f (embInf (qD M D_0) (qP M D_0 j_0) n
        (projInf (qD M D_0) (qP M D_0 j_0) n z)))) =
    qMap M (r n) (f (r n z))
  simp [hrw] using congrArg (fun g => g (f (r n z))) hQ
have hmono_frz : Monotone (fun m => f (r m z)) :=
  fun a b hab => f.monotone (hr_mono z hab)
have hfm : forall n, Monotone (fun m => qMap M (r n) (f (r m z))) :=
  fun n _ _ hab => (qMap M (r n)).monotone (f.monotone (hr_mono z hab))
have hfn : forall m, Monotone (fun n => qMap M (r n) (f (r m z))) := by
  intro m a b hab
  -- `r` is monotone in the index, so `Q(r_a) <= Q(r_b)`.
  have : r a <= r b := by
    rw [ScottMap.le_def]
    intro w
    exact hr_mono w hab
  exact IsQuantumPowerModel.map_mono (Q := M.Power) this (f (r m z))
have hconR : forall n (a : Nat -> QuantumPower M (QDInf M D_0 j_0)),
  Monotone a -> qMap M (r n) (bigcup m, a m) = bigcup m, qMap M (r n) (a m) := by
  intro n a ha
  have hdir : DirectedOn (* <= *) (Set.range a) :=
    directedOn_range.2 fun i j => <max i j, ha (le_max_left i j), ha (le_max_right i j)>
  rw [show (bigcup m, a m) = sSup (Set.range a) from sSup_range.symm,
    (qMap M (r n)).preservesDirectedSup_coe (Set.range a) (Set.range_nonempty a) hdir,
    <- Set.range_comp, sSup_range]
  rfl
have hmono_r : Monotone r := by
  intro a b hab
  rw [ScottMap.le_def]
  intro w
  exact hr_mono w hab
have hidQ : (bigcup n, qMap M (r n)) = ScottMap.idMap := by
  have hr : (bigcup n, r n) = ScottMap.idMap :=
    (idInf_eq_iSup (qD M D_0) (qP M D_0 j_0)).symm
  have hpres := IsQuantumPowerModel.map_iSup (Q := M.Power) r hmono_r
  have hid := IsQuantumPowerModel.map_id (Q := M.Power) (D := QDInf M D_0 j_0)
  calc (bigcup n, qMap M (r n)) = qMap M (bigcup n, r n) := hpres.symm
  _ = qMap M (ScottMap.idMap : ScottMap (QDInf M D_0 j_0) (QDInf M D_0 j_0)) := by
    rw [hr]
  _ = ScottMap.idMap := hid

```



```

have hsupQ : forall (g : Nat -> ScottMap (QuantumPower M (QDInf M D_0 j_0))
  (QuantumPower M (QDInf M D_0 j_0)))
  (w : QuantumPower M (QDInf M D_0 j_0)),
  (bigcup n, g n) w = bigcup n, g n w := by
  intro g w
  rw [show (bigcup n, g n) = sSup (Set.range g) from sSup_range.symm,
    ScottMap.sSup_apply, <- Set.range_comp, sSup_range]
  rfl
have hfz : f z = bigcup n, qMap M (r n) (f (r n z)) :=
  calc f z = bigcup k, qMap M (r k) (f z) := by
    have h1 : (bigcup n, qMap M (r n)) (f z) = f z := by
      rw [hidQ, ScottMap.idMap_apply]
      exact h1.symm.trans (hsupQ (fun n => qMap M (r n)) (f z))
    _ = bigcup k, qMap M (r k) (f (bigcup m, r m z)) := by
      refine iSup_congr fun k => ?_
      rw [ <- hA z]
    _ = bigcup k, qMap M (r k) (bigcup m, f (r m z)) := by
      refine iSup_congr fun k => ?_
      rw [hcontQ f (fun m => r m z) (hr_mono z)]
    _ = bigcup k, bigcup m, qMap M (r k) (f (r m z)) :=
      iSup_congr fun k => hcontR k (fun m => f (r m z)) hmono_frz
    _ = bigcup n, qMap M (r n) (f (r n z)) :=
      q_iSup_2_monotone_eq_diagonal (fun n m => qMap M (r n) (f (r m z)))
      hfm hfn
  calc qEmbInfInf M D_0 j_0 (qProjInfInf M D_0 j_0 f) z
    = bigcup n, (qiInfTerm M D_0 j_0 n (qProjInfInf M D_0 j_0 f)) z := hev
    _ = bigcup n, qMap M (r n) (f (r n z)) := iSup_congr hterm
    _ = f z := hfz.symm

theorem qProjInfInf_qEmbInfInf (x : QDInf M D_0 j_0) :
  qProjInfInf M D_0 j_0 (qEmbInfInf M D_0 j_0 x) = x := by
  have h := congrArg (fun g => g x) (qProjInfInf_comp_qEmbInfInf M D_0 j_0)
  simpa [ScottMap.comp_apply, ScottMap.idMap_apply] using h

theorem qEmbInfInf_qProjInfInf (f : QuantumFunctor M (QDInf M D_0 j_0)) :
  qEmbInfInf M D_0 j_0 (qProjInfInf M D_0 j_0 f) = f := by
  have h := congrArg (fun g => g f) (qEmbInfInf_comp_qProjInfInf M D_0 j_0)
  simpa [ScottMap.comp_apply, ScottMap.idMap_apply] using h

/-- Order isomorphism `D_inf ?o [D_inf -> Q(D_inf)]`. -/
noncomputable def qDInf_orderIso :
  QDInf M D_0 j_0 ?o ScottMap (QDInf M D_0 j_0) (QuantumPower M (QDInf M D_0 j_0)) :=
  (Equiv.mk (qEmbInfInf M D_0 j_0) (qProjInfInf M D_0 j_0)
    (qProjInfInf_qEmbInfInf M D_0 j_0) (qEmbInfInf_qProjInfInf M D_0 j_0)).toOrderIso
  (qEmbInfInf M D_0 j_0).monotone (qProjInfInf M D_0 j_0).monotone

end LimitMaps

/-- **Capstone (parameterized).** The inverse limit of
`D_{n+1} = [D_n -> Q(D_n)]` is in `?QVA` and solves
`D_inf ~=[D_inf -> Q(D_inf)]`. -/
theorem omegaQVA_quantum_domain_equation_solved
  (M : QuantumPowerModel) (D_0 : QDomain.{u})
  (j_0 : IsContinuousLatticeProjection D_0.carrier (QuantumFunctor M D_0.carrier)) :
  Nonempty (IsOmegaQVA (QDInf M D_0 j_0)) /\
  (qProjInfInf M D_0 j_0).comp (qEmbInfInf M D_0 j_0) = ScottMap.idMap /\
  (qEmbInfInf M D_0 j_0).comp (qProjInfInf M D_0 j_0) = ScottMap.idMap /\
  Nonempty (QDInf M D_0 j_0 ?o ScottMap (QDInf M D_0 j_0) (QuantumPower M (QDInf M D_0 j_0)))
  /\
  (ScottMap.idMap : ScottMap (QDInf M D_0 j_0) (QDInf M D_0 j_0)) =
    bigcup n, (embInf (qTowerType M <D_0.carrier>) (qTowerProj M <D_0.carrier> j_0) n).comp
      (projInf (qTowerType M <D_0.carrier>) (qTowerProj M <D_0.carrier> j_0) n) :=
  <<qDInf_isOmegaQVA M D_0 j_0>,

```

```

    qProjInfInf_comp_qEmbInfInf M D_0 j_0,
    qEmbInfInf_comp_qProjInfInf M D_0 j_0,
    <qDInf_orderIso M D_0 j_0>,
    idInf_eq_iSup (qTowerType M <D_0.carrier>) (qTowerProj M <D_0.carrier> j_0)>
end Scott1972.ContinuousLattice

```

A.41 QLambda/QuantumInstrument.lean

867 lines.

Lean 4 source (lines 1–400)

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/
import Mathlib.Data.Fintype.Sigma
import Mathlib.Analysis.Real.Sqrt
import Mathlib.Analysis.InnerProductSpace.Positive
import QLambda.QuantumStateSpace

/-!
# Finite quantum operations and instruments

A finite Kraus family denotes a completely positive map by the
operator-sum formula. Trace non-increase is recorded separately; an
instrument is a finite family whose total outcome probability is
trace non-increasing.

`FiniteInstrumentComp` is the Type-level computational monad of a
fixed finite register with classical outcomes in `D`. It is not a
complete lattice, so it is not yet an `IsQuantumPowerModel`. The
Scott-complete instrument powerdomain is a later milestone.
-/

open Matrix
open scoped BigOperators ComplexConjugate ComplexOrder MatrixOrder

namespace QLambda

/-- A linear operator from an `n`-dimensional register to an
`m`-dimensional register. -/
abbrev KrausOperator (n m : Nat) :=
  Matrix (Fin m) (Fin n) ?

/-- A finite operator-sum presentation of a completely positive map. -/
abbrev KrausFamily (n m : Nat) :=
  List (KrausOperator n m)

namespace KrausFamily

variable {n m : Nat}

/-- Rank-one Choi contribution of one Kraus operator. -/
def choiTerm (A : KrausOperator n m) :
  Matrix (Fin m x Fin n) (Fin m x Fin n) ? :=
  fun p q => A p.1 p.2 * star (A q.1 q.2)

/-- Choi matrix of a Kraus presentation. Unlike the Kraus list, this
matrix is intrinsic to the represented completely positive map. -/
def choi (K : KrausFamily n m) :

```

```

    Matrix (Fin m x Fin n) (Fin m x Fin n) ? :=
    (K.map choiTerm).sum

/-- The matrix action  $\sum_i K_i ? K_i ?$  of a finite Kraus family. -/
def applyMat (K : KrausFamily n m) (? : Matrix (Fin n) (Fin n) ?) :
    Matrix (Fin m) (Fin m) ? :=
    (K.map fun A => A * ? * A).sum

/-- A matrix unit, used to recover Choi entries from the represented CP
map. -/
def matrixUnit (i j : Fin n) : Matrix (Fin n) (Fin n) ? :=
    fun k l => if k = i then if l = j then 1 else 0 else 0

/-- The empty family is the zero CP map. -/
def zero : KrausFamily n m :=
    []

/-- The identity channel's one-element Kraus presentation. -/
def identity (n : Nat) : KrausFamily n n :=
    [1]

/-- Sequential composition of two operator-sum presentations. -/
def comp {? : Nat} (L : KrausFamily m ?) (K : KrausFamily n m) :
    KrausFamily n ? :=
    L.flatMap fun B => K.map fun A => B * A

/-- Scale every Kraus operator by a scalar. -/
def scale (c : ?) (K : KrausFamily n m) : KrausFamily n m :=
    K.map (c * *)

@[simp] theorem choi_nil :
    choi ([]) : KrausFamily n m = 0 := by
    simp [choi]

@[simp] theorem choi_single (A : KrausOperator n m) :
    choi [A] = choiTerm A := by
    simp [choi]

theorem choi_cons (A : KrausOperator n m) (K : KrausFamily n m) :
    choi (A :: K) = choiTerm A + choi K := by
    simp [choi]

theorem choi_append (K L : KrausFamily n m) :
    choi (K ++ L) = choi K + choi L := by
    simp [choi, List.map_append, List.sum_append]

/-- Each Choi entry is an output matrix entry obtained by applying the
represented CP map to a matrix unit. -/
theorem applyMat_matrixUnit (K : KrausFamily n m) (p q : Fin m x Fin n) :
    applyMat K (matrixUnit p.2 q.2) p.1 q.1 = choi K p q := by
    induction K with
    | nil => simp [applyMat, choi]
    | cons A K ih =>
        change (A * matrixUnit p.2 q.2 * A?) p.1 q.1 +
        applyMat K (matrixUnit p.2 q.2) p.1 q.1 =
        choiTerm A p q + choi K p q
    rw [ih]
    congr 1
    simp [matrixUnit, choiTerm, Matrix.mul_apply]

/-- Every output coordinate is the contraction of the input matrix with
the corresponding block of the Choi matrix. -/
theorem applyMat_apply (K : KrausFamily n m)

```

```

    (? : Matrix (Fin n) (Fin n) ?) (a b : Fin m) :
    applyMat K ? a b =
      ? i, ? j, choi K (a, i) (b, j) * ? i j := by
induction K with
| nil => simp [applyMat, choi]
| cons A K ih =>
  change (A * ? * A?) a b + applyMat K ? a b =
    ? i, ? j, choi (A :: K) (a, i) (b, j) * ? i j
  rw [choi_cons, ih]
  simp only [Matrix.add_apply, choiTerm, add_mul, Finset.sum_add_distrib]
  congr 1
  simp only [Matrix.mul_apply, conjTranspose_apply]
  simp_rw [Finset.sum_mul]
  rw [Finset.sum_comm]
  apply Finset.sum_congr rfl
  intro i _
  apply Finset.sum_congr rfl
  intro j _
  ring

theorem choiTerm_posSemidef (A : KrausOperator n m) :
  (choiTerm A).PosSemidef := by
  let v : Fin m x Fin n -> ? := fun p => A p.1 p.2
  change (Matrix.vecMulVec v (star v)).PosSemidef
  exact Matrix.posSemidef_vecMulVec_self_star v

theorem choi_posSemidef (K : KrausFamily n m) :
  (choi K).PosSemidef := by
  induction K with
  | nil => simp using (Matrix.PosSemidef.zero :
    (0 : Matrix (Fin m x Fin n) (Fin m x Fin n) ?).PosSemidef)
  | cons A K ih =>
    rw [choi_cons]
    exact (choiTerm_posSemidef A).add ih

theorem choi_nonneg (K : KrausFamily n m) : 0 <= choi K := by
  rw [Matrix.le_iff]
  simp using choi_posSemidef K

/-- Every positive semidefinite matrix on the Choi coordinate space has
a finite Kraus presentation. -/
theorem exists_krausFamily_choi_eq
  {M : Matrix (Fin m x Fin n) (Fin m x Fin n) ?}
  (hM : M.PosSemidef) :
  exists K : KrausFamily n m, choi K = M := by
  obtain <k, v, hv> :=
    Matrix.posSemidef_iff_eq_sum_vecMulVec.mp hM
  let A : Fin k -> KrausOperator n m :=
    fun r i j => v r (i, j)
  refine <List.ofFn A, ?_>
  rw [choi, List.map_ofFn, List.sum_ofFn, hv]
  apply Finset.sum_congr rfl
  intro r _
  ext p q
  change v r p * star (v r q) = v r p * star (v r q)
  rfl

/-- Equality of Choi denotations. -/
def ChoiSemEq (K L : KrausFamily n m) : Prop :=
  choi K = choi L

/-- The CP order: `K sqsub L` when the Choi difference is positive
semidefinite. -/

```

```

def ChoiRefines (K L : KrausFamily n m) : Prop :=
  choi K <= choi L

/-- Extensional equality of the represented operator-sum maps. -/
def SemEq (K L : KrausFamily n m) : Prop :=
  forall ?, applyMat K ? = applyMat L ?

/-- Presentation-independent CP refinement witnessed by a residual
Kraus family. Thus `K sqsub ? L` means `L = K + R` as CP maps. -/
def Refines (K L : KrausFamily n m) : Prop :=
  exists R : KrausFamily n m, SemEq L (K ++ R)

abbrev ApplySemEq := @SemEq
abbrev ResidualRefines := @Refines

/-- Extensional equality of operator-sum maps implies equality of their
intrinsic Choi matrices. -/
theorem choi_eq_of_semEq {K L : KrausFamily n m} (hKL : SemEq K L) :
  choi K = choi L := by
  ext p q
  rw [ <- applyMat_matrixUnit K p q, <- applyMat_matrixUnit L p q, hKL]

/-- Equality of Choi matrices implies extensional equality of the
represented operator-sum maps. -/
theorem semEq_of_choi_eq {K L : KrausFamily n m}
  (hKL : choi K = choi L) : SemEq K L := by
  intro ?
  ext a b
  rw [applyMat_apply, applyMat_apply, hKL]

/-- Choi equality exactly characterizes extensional equality of finite
Kraus presentations. -/
theorem semEq_iff_choi_eq (K L : KrausFamily n m) :
  SemEq K L <-> choi K = choi L :=
  <choi_eq_of_semEq, semEq_of_choi_eq>

/-- Residual CP refinement implies Loewner refinement of Choi
denotations. -/
theorem choiRefines_of_residualRefines {K L : KrausFamily n m}
  (hKL : ResidualRefines K L) : ChoiRefines K L := by
  obtain <R, hR> := hKL
  rw [ChoiRefines, choi_eq_of_semEq hR, choi_append]
  exact le_add_of_nonneg_right (choi_nonneg R)

/-- Loewner refinement of Choi denotations is witnessed by a residual
finite Kraus family. -/
theorem residualRefines_of_choiRefines {K L : KrausFamily n m}
  (hKL : ChoiRefines K L) : ResidualRefines K L := by
  have hdiff : (choi L - choi K).PosSemidef := hKL
  obtain <R, hR> := exists_krausFamily_choi_eq hdiff
  refine <R, semEq_of_choi_eq ?_>
  rw [choi_append, hR]
  abel

/-- Residual refinement and Choi/Loewner refinement coincide for finite
Kraus families. -/
theorem residualRefines_iff_choiRefines (K L : KrausFamily n m) :
  ResidualRefines K L <-> ChoiRefines K L :=
  <choiRefines_of_residualRefines, residualRefines_of_choiRefines>

theorem applySemEq_refl (K : KrausFamily n m) : ApplySemEq K K :=
  fun _ => rfl

```

```

theorem applySemEq_symm {K L : KrausFamily n m} :
  ApplySemEq K L -> ApplySemEq L K :=
  fun h ? => (h ?).symm

theorem applySemEq_trans {K L M : KrausFamily n m}
  (hKL : ApplySemEq K L) (hLM : ApplySemEq L M) :
  ApplySemEq K M :=
  fun ? => (hKL ?).trans (hLM ?)

theorem choiSemEq_iff_choiRefines (K L : KrausFamily n m) :
  ChoiSemEq K L <=> ChoiRefines K L /\ ChoiRefines L K := by
  simp only [ChoiSemEq, ChoiRefines]
  exact <fun h => <h.le, h.ge>, fun h => le_antisymm h.1 h.2>

@[simp] theorem applyMat_zero (? : Matrix (Fin n) (Fin n) ?) :
  applyMat (zero : KrausFamily n m) ? = 0 := by
  simp [applyMat, zero]

@[simp] theorem applyMat_nil (? : Matrix (Fin n) (Fin n) ?) :
  applyMat ([] : KrausFamily n m) ? = 0 := by
  simp [applyMat]

@[simp] theorem applyMat_single (A : KrausOperator n m)
  (? : Matrix (Fin n) (Fin n) ?) :
  applyMat [A] ? = A * ? * A? := by
  simp [applyMat]

theorem applyMat_cons (A : KrausOperator n m) (K : KrausFamily n m)
  (? : Matrix (Fin n) (Fin n) ?) :
  applyMat (A :: K) ? = A * ? * A? + applyMat K ? := by
  simp [applyMat]

theorem applyMat_append (K L : KrausFamily n m)
  (? : Matrix (Fin n) (Fin n) ?) :
  applyMat (K ++ L) ? = applyMat K ? + applyMat L ? := by
  induction K with
  | nil => simp [applyMat]
  | cons A K ih =>
    simp [applyMat_cons, ih, add_assoc]

theorem applyMat_flatMap {a : Type*} (xs : List a)
  (f : a -> KrausFamily n m) (? : Matrix (Fin n) (Fin n) ?) :
  applyMat (xs.flatMap f) ? = (xs.map fun x => applyMat (f x) ?).sum := by
  induction xs with
  | nil => simp [applyMat]
  | cons x xs ih =>
    simp only [List.flatMap_cons, List.map_cons, List.sum_cons]
    rw [applyMat_append, ih]

theorem residualRefines_refl (K : KrausFamily n m) :
  ResidualRefines K K := by
  refine <[], ?_>
  intro ?
  simp

theorem residualRefines_of_semEq {K L : KrausFamily n m}
  (hKL : SemEq K L) : ResidualRefines K L := by
  refine <[], fun ? => ?_>
  simp using (hKL ?).symm

theorem residualRefines_antisymmRel_of_semEq {K L : KrausFamily n m}
  (hKL : SemEq K L) :
  AntisymmRel ResidualRefines K L :=

```

```

<residualRefines_of_semEq hKL,
  residualRefines_of_semEq (applySemEq_symm hKL)>

theorem residualRefines_trans {K L M : KrausFamily n m}
  (hKL : ResidualRefines K L) (hLM : ResidualRefines L M) :
  ResidualRefines K M := by
  obtain <R, hR> := hKL
  obtain <S, hS> := hLM
  refine <R ++ S, fun ? => ?_>
  rw [← List.append_assoc, applyMat_append, applyMat_append]
  calc
    applyMat M ? = applyMat (L ++ S) ? := hS ?
    _ = applyMat L ? + applyMat S ? := applyMat_append L S ?
    _ = applyMat (K ++ R) ? + applyMat S ? := congrArg (* + applyMat S ?) (hR ?)
    _ = (applyMat K ? + applyMat R ?) + applyMat S ? := by
      rw [applyMat_append]

instance instIsPreorderResidualRefines :
  IsPreorder (KrausFamily n m) ResidualRefines where
  refl := residualRefines_refl
  trans _ _ _ := residualRefines_trans

@[simp] theorem applyMat_identity (? : Matrix (Fin n) (Fin n) ?) :
  applyMat (identity n) ? = ? := by
  simp [identity, applyMat]

theorem applyMat_add (K : KrausFamily n m)
  (? sigma : Matrix (Fin n) (Fin n) ?) :
  applyMat K (? + sigma) = applyMat K ? + applyMat K sigma := by
  induction K with
  | nil => simp [applyMat]
  | cons A K ih =>
    rw [applyMat_cons, applyMat_cons, applyMat_cons, ih]
    have hA :
      A * (? + sigma) * A.conjTranspose =
      A * ? * A.conjTranspose + A * sigma * A.conjTranspose := by
      let A' : Matrix (Fin m) (Fin n) ? := A
      change A' * (? + sigma) * A'.conjTranspose =
      A' * ? * A'.conjTranspose + A' * sigma * A'.conjTranspose
      rw [Matrix.mul_add A' ? sigma, Matrix.add_mul (A' * ?) (A' * sigma) A'.conjTranspose]
    rw [hA]
    ac_rfl

theorem applyMat_smul (K : KrausFamily n m) (c : ?)
  (? : Matrix (Fin n) (Fin n) ?) :
  applyMat K (c * ?) = c * applyMat K ? := by
  induction K with
  | nil => simp [applyMat]
  | cons A K ih =>
    rw [applyMat_cons, applyMat_cons, ih]
    have : A * (c * ?) * A.conjTranspose = c * (A * ? * A.conjTranspose) := by
      let A' : Matrix (Fin m) (Fin n) ? := A
      change A' * (c * ?) * A'.conjTranspose = c * (A' * ? * A'.conjTranspose)
      rw [Matrix.mul_smul A' c ?, Matrix.smul_mul c (A' * ?) A'.conjTranspose]
    rw [this, smul_add]

theorem applyMat_sub (K : KrausFamily n m)
  (? sigma : Matrix (Fin n) (Fin n) ?) :
  applyMat K (? - sigma) = applyMat K ? - applyMat K sigma := by
  rw [sub_eq_add_neg, applyMat_add, ← neg_one_smul ? sigma, applyMat_smul,
    neg_one_smul, sub_eq_add_neg]

theorem applyMat_map_mul {? : Nat} (B : KrausOperator m ?)

```

```

(K : KrausFamily n m) (? : Matrix (Fin n) (Fin n) ?) :
  applyMat (K.map fun A => B * A) ? = B * applyMat K ? * B? := by
induction K with
| nil => simp [applyMat]
| cons A K ih =>
  rw [List.map_cons, applyMat_cons, applyMat_cons, ih, conjTranspose_mul]
  have hA :
    B * A * ? * (A.conjTranspose * B.conjTranspose) =
    B * (A * ? * A.conjTranspose) * B.conjTranspose := by
  let A' : Matrix (Fin m) (Fin n) ? := A
  let B' : Matrix (Fin ?) (Fin m) ? := B
  simp [Matrix.mul_assoc]
  have hsum :
    B * (A * ? * A.conjTranspose) * B.conjTranspose +
    B * applyMat K ? * B.conjTranspose =
    B * (A * ? * A.conjTranspose + applyMat K ?) * B.conjTranspose := by
  let B' : Matrix (Fin ?) (Fin m) ? := B
  let X : Matrix (Fin m) (Fin m) ? := A * ? * A.conjTranspose
  let Y : Matrix (Fin m) (Fin m) ? := applyMat K ?
  change B' * X * B'.conjTranspose + B' * Y * B'.conjTranspose =
  B' * (X + Y) * B'.conjTranspose
  rw [Matrix.mul_add B' X Y, Matrix.add_mul (B' * X) (B' * Y) B'.conjTranspose]
  rw [hA, hsum]

theorem applyMat_comp {? : Nat} (L : KrausFamily m ?) (K : KrausFamily n m)
  (? : Matrix (Fin n) (Fin n) ?) :
  applyMat (comp L K) ? = applyMat L (applyMat K ?) := by
induction L with
| nil => simp [comp, applyMat]
| cons B L ih =>
  rw [comp, List.flatMap_cons, applyMat_append, applyMat_map_mul]
  change B * applyMat K ? * B? + applyMat (comp L K) ? =
  applyMat (B :: L) (applyMat K ?)
  rw [ih, applyMat_cons]

```

Lean 4 source (lines 401–800)

```

/-- Coordinate formula for the Choi matrix of sequential composition. -/
theorem choi_comp_apply {? : Nat} (L : KrausFamily m ?)
  (K : KrausFamily n m) (a b : Fin ?) (i j : Fin n) :
  choi (comp L K) (a, i) (b, j) =
  ? x, ? y, choi L (a, x) (b, y) * choi K (x, i) (y, j) := by
rw [ <- applyMat_matrixUnit (comp L K) (a, i) (b, j), applyMat_comp,
  applyMat_apply]
apply Finset.sum_congr rfl
intro x _
apply Finset.sum_congr rfl
intro y _
rw [applyMat_matrixUnit K (x, i) (y, j)]

theorem applyMat_scale (c : ?) (K : KrausFamily n m)
  (? : Matrix (Fin n) (Fin n) ?) :
  applyMat (scale c K) ? = (c * star c) * applyMat K ? := by
induction K with
| nil => simp [scale, applyMat]
| cons A K ih =>
  simp only [scale, List.map_cons, applyMat_cons] at ih | -
  rw [ih, conjTranspose_smul]
  have hA :
    (c * A) * ? * (star c * A.conjTranspose) =
    (c * star c) * (A * ? * A.conjTranspose) := by
  let A' : Matrix (Fin m) (Fin n) ? := A
  change (c * A') * ? * (star c * A'.conjTranspose) =
  (c * star c) * (A' * ? * A'.conjTranspose)

```



```

    rw [Matrix.smul_mul, Matrix.mul_smul, Matrix.smul_mul, smul_smul,
        mul_comm (star c) c]
    rw [hA, smul_add]

/-- The operator-sum of a Kraus family is completely positive. -/
theorem applyMat_posSemidef (K : KrausFamily n m)
  {? : Matrix (Fin n) (Fin n) ?} (h? : ?.PosSemidef) :
  (applyMat K ?).PosSemidef := by
  induction K with
  | nil =>
    simpa [applyMat] using PosSemidef.zero (n := Fin m) (R := ?)
  | cons A K ih =>
    rw [applyMat_cons]
    exact (h?.mul_mul_conjTranspose_same A).add ih

/-- Operator-sum is Loewner-monotone. -/
theorem applyMat_mono (K : KrausFamily n m)
  {? sigma : Matrix (Fin n) (Fin n) ?} (h : ? <= sigma) :
  applyMat K ? <= applyMat K sigma := by
  change (applyMat K sigma - applyMat K ?).PosSemidef
  rw [ <- applyMat_sub]
  exact applyMat_posSemidef K h

@[simp] theorem identity_comp (K : KrausFamily n m) :
  comp (identity m) K = K := by
  simp [comp, identity]

@[simp] theorem comp_identity (K : KrausFamily n m) :
  comp K (identity n) = K := by
  simp [comp, identity]

theorem map_comp {? r : Nat} (C : KrausOperator ? r)
  (L : KrausFamily m ?) (K : KrausFamily n m) :
  (comp L K).map (fun A => C * A) = comp (L.map (fun B => C * B)) K := by
  induction L with
  | nil => simp [comp]
  | cons B L ih =>
    simp only [comp, List.flatMap_cons, List.map_append, List.map_map,
      Function.comp_def]
    have hmul :
      K.map (fun x => C * (B * x)) = K.map (fun A => C * B * A) :=
      List.map_congr_left fun a _ => by
        let C' : Matrix (Fin r) (Fin ?) ? := C
        let B' : Matrix (Fin ?) (Fin m) ? := B
        change C' * (B' * a) = C' * B' * a
        exact (Matrix.mul_assoc C' B' a).symm
    rw [hmul]
    change
      K.map (fun A => C * B * A) ++ (comp L K).map (fun A => C * A) =
      comp ((C * B) :: L.map (fun B => C * B)) K
    rw [ih]
    simp [comp, List.flatMap_cons]

theorem comp_append {? : Nat} (L_1 L_2 : KrausFamily m ?) (K : KrausFamily n m) :
  comp (L_1 ++ L_2) K = comp L_1 K ++ comp L_2 K := by
  simp [comp, List.flatMap_append]

theorem comp_assoc {? r : Nat} (M : KrausFamily ? r)
  (L : KrausFamily m ?) (K : KrausFamily n m) :
  comp M (comp L K) = comp (comp M L) K := by
  induction M with
  | nil => simp [comp]
  | cons C M ih =>

```

```

change
  (comp L K).map (fun A => C * A) ++ comp M (comp L K) =
    comp (comp (C :: M) L) K
rw [map_comp, ih, <- comp_append]
rfl

/-- Residual CP refinement is preserved by postcomposition. -/
theorem residualRefines_comp_left {? : Nat} (M : KrausFamily m ?)
  {K L : KrausFamily n m} (hKL : ResidualRefines K L) :
  ResidualRefines (comp M K) (comp M L) := by
  obtain <R, hR> := hKL
  refine <comp M R, fun ? => ?_>
  rw [applyMat_append, applyMat_comp, applyMat_comp, applyMat_comp]
  calc
    applyMat M (applyMat L ?) =
      applyMat M (applyMat (K ++ R) ?) := congrArg (applyMat M) (hR ?)
    _ = applyMat M (applyMat K ? + applyMat R ?) := by
      rw [applyMat_append]
    _ = applyMat M (applyMat K ?) + applyMat M (applyMat R ?) :=
      applyMat_add M _ _

/-- Residual CP refinement is preserved by precomposition. -/
theorem residualRefines_comp_right {? : Nat} (M : KrausFamily ? n)
  {K L : KrausFamily n m} (hKL : ResidualRefines K L) :
  ResidualRefines (comp K M) (comp L M) := by
  obtain <R, hR> := hKL
  refine <comp R M, fun ? => ?_>
  rw [ <- comp_append, applyMat_comp, applyMat_comp]
  exact hR (applyMat M ?)

/-- Residual refinement is additive in the left summand. -/
theorem residualRefines_append_left (M : KrausFamily n m)
  {K L : KrausFamily n m} (hKL : ResidualRefines K L) :
  ResidualRefines (M ++ K) (M ++ L) := by
  obtain <R, hR> := hKL
  refine <R, fun ? => ?_>
  have hR? := hR ?
  rw [applyMat_append] at hR?
  simp only [applyMat_append]
  calc
    applyMat M ? + applyMat L ? =
      applyMat M ? + (applyMat K ? + applyMat R ?) :=
        congrArg (applyMat M ? + *) hR?
    _ = (applyMat M ? + applyMat K ?) + applyMat R ? :=
      (add_assoc _ _ _).symm

/-- Residual refinement is additive in the right summand. -/
theorem residualRefines_append_right (M : KrausFamily n m)
  {K L : KrausFamily n m} (hKL : ResidualRefines K L) :
  ResidualRefines (K ++ M) (L ++ M) := by
  obtain <R, hR> := hKL
  refine <R, fun ? => ?_>
  simp only [applyMat_append]
  calc
    applyMat L ? + applyMat M ? =
      (applyMat K ? + applyMat R ?) + applyMat M ? := by
        rw [ <- applyMat_append K R, <- hR ?]
    _ = (applyMat K ? + applyMat M ?) + applyMat R ? := by
      ac_rfl

theorem residualRefines_append {K_1 K_2 L_1 L_2 : KrausFamily n m}
  (h_1 : ResidualRefines K_1 L_1) (h_2 : ResidualRefines K_2 L_2) :
  ResidualRefines (K_1 ++ K_2) (L_1 ++ L_2) :=

```

```

residualRefines_trans
  (residualRefines_append_right K_2 h_1)
  (residualRefines_append_left L_1 h_2)

theorem residualRefines_flatMap {a : Type*} (xs : List a)
  {f g : a -> KrausFamily n m}
  (hfg : forall x in xs, ResidualRefines (f x) (g x)) :
  ResidualRefines (xs.flatMap f) (xs.flatMap g) := by
induction xs with
| nil =>
  exact residualRefines_refl []
| cons x xs ih =>
  simp only [List.flatMap_cons]
  exact residualRefines_append
    (hfg x (by simp))
    (ih fun y hy => hfg y (by simp [hy]))

/-- If `A` is an isometry (`A? A = I`), the one-element family is
trace-preserving. -/
theorem trace_applyMat_isometry {k : Nat} (A : KrausOperator n k)
  (hA : A? * A = 1) (? : Matrix (Fin n) (Fin n) ?) :
  Matrix.trace (applyMat [A] ?) = Matrix.trace ? := by
  rw [applyMat_single, Matrix.trace_mul_comm (A * ?) A?, <- Matrix.mul_assoc,
    hA, Matrix.one_mul]

end KrausFamily

/-- A trace-nonincreasing completely positive map, represented by
finitely many Kraus operators. -/
structure QuantumOperation (n m : Nat) where
  kraus : KrausFamily n m
  trace_nonincreasing :
    forall ? : Matrix (Fin n) (Fin n) ?, ?PosSemidef ->
      (Matrix.trace (KrausFamily.applyMat kraus ?)).re <=
        (Matrix.trace ?).re

namespace QuantumOperation

/-- The identity quantum operation. -/
def identity (n : Nat) : QuantumOperation n n where
  kraus := KrausFamily.identity n
  trace_nonincreasing := by
    intro ? _
    rw [KrausFamily.applyMat_identity]

/-- The zero (completely forgetful) operation. -/
def zero (n m : Nat) : QuantumOperation n m where
  kraus := KrausFamily.zero
  trace_nonincreasing := by
    intro ? h?
    have htr : 0 <= Matrix.trace ? := PosSemidef.trace_nonneg h?
    rw [KrausFamily.applyMat_zero, Matrix.trace_zero, Complex.zero_re]
    exact (RCLike.nonneg_iff (K := ?).mp htr).1

/-- Sequential composition of trace-nonincreasing CP maps. -/
def comp {n m ? : Nat} (? : QuantumOperation m ?) (? : QuantumOperation n m) :
  QuantumOperation n ? where
  kraus := KrausFamily.comp ?.kraus ?.kraus
  trace_nonincreasing := by
    intro ? h?
    rw [KrausFamily.applyMat_comp]
    exact (?.trace_nonincreasing _ (KrausFamily.applyMat_posSemidef ?.kraus h?)).trans
      (?.trace_nonincreasing ? h?)

```

```

/-- Action on a sub-normalized density. -/
def apply {n m : Nat} (? : QuantumOperation n m) (? : SubNormalizedDensity n) :
  SubNormalizedDensity m where
  mat := KrausFamily.applyMat ?.kraus ?.mat
  posSemidef := KrausFamily.applyMat_posSemidef ?.kraus ?.posSemidef
  trace_le_one :=
    (?.trace_nonincreasing ?.mat ?.posSemidef).trans ?.trace_le_one

/-- One-element family of an isometry is a quantum operation. -/
def ofIsometry {n m : Nat} (A : KrausOperator n m) (hA : A? * A = 1) :
  QuantumOperation n m where
  kraus := [A]
  trace_nonincreasing := by
    intro ? _
    rw [KrausFamily.trace_applyMat_isometry A hA]

end QuantumOperation

/-- A finite quantum instrument. Each outcome is CP, while trace
non-increase is required of the sum over all outcomes. -/
structure QuantumInstrument (n m outcomes : Nat) where
  branch : Fin outcomes -> KrausFamily n m
  trace_nonincreasing :
    forall ? : Matrix (Fin n) (Fin n) ?, ?.PosSemidef ->
      (? i, (Matrix.trace (KrausFamily.applyMat (branch i) ?)).re) <=
        (Matrix.trace ?).re

namespace QuantumInstrument

/-- Regard a quantum operation as a one-outcome instrument. -/
def singleton {n m : Nat} (? : QuantumOperation n m) :
  QuantumInstrument n m 1 where
  branch := fun _ => ?.kraus
  trace_nonincreasing := by
    intro ? h?
    simpa using ?.trace_nonincreasing ? h?

end QuantumInstrument

/-- A finite `D`-valued computation on an `n`-dimensional register:
an instrument together with a classical outcome embedding into `D`.

This is a Type-level monad, not a complete lattice. It therefore
cannot yet instantiate `IsQuantumPowerModel`. -/
structure FiniteInstrumentComp (n : Nat) (D : Type*) where
  Outcome : Type
  [outcomeFintype : Fintype Outcome]
  branch : Outcome -> KrausFamily n n
  value : Outcome -> D
  trace_nonincreasing :
    forall ? : Matrix (Fin n) (Fin n) ?, ?.PosSemidef ->
      (? o : Outcome, (Matrix.trace (KrausFamily.applyMat (branch o) ?)).re) <=
        (Matrix.trace ?).re

attribute [instance] FiniteInstrumentComp.outcomeFintype

namespace FiniteInstrumentComp

variable {n : Nat} {D E F : Type*}

/-- Outcome probability `Tr(?_o(?))`. -/
def outcomeProb (? : FiniteInstrumentComp n D) (? : SubNormalizedDensity n)

```

```

    (o : ?.Outcome) : ? :=
    (Matrix.trace (KrausFamily.applyMat (?branch o) ?.mat)).re

/-- Deterministic return of a classical value, leaving the register
untouched. -/
def unit (d : D) : FiniteInstrumentComp n D where
  Outcome := Unit
  branch := fun _ => KrausFamily.identity n
  value := fun _ => d
  trace_nonincreasing := by
    intro ? _
    simp [KrausFamily.applyMat_identity]

/-- Post-compose classical outcomes. -/
def map (f : D -> E) (? : FiniteInstrumentComp n D) :
  FiniteInstrumentComp n E where
  Outcome := ?.Outcome
  outcomeFintype := ?.outcomeFintype
  branch := ?.branch
  value := f comp ?.value
  trace_nonincreasing := ?.trace_nonincreasing

@[simp] theorem map_id (? : FiniteInstrumentComp n D) :
  map id ? = ? :=
  rfl

@[simp] theorem map_comp (g : E -> F) (f : D -> E) (? : FiniteInstrumentComp n D) :
  map (g comp f) ? = map g (map f ?) :=
  rfl

/-- Kleisli extension: run `?`, then the continuation at the returned
value. Sequential composition of Kraus families implements the
quantum effect. -/
def bind (? : FiniteInstrumentComp n D) (f : D -> FiniteInstrumentComp n E) :
  FiniteInstrumentComp n E where
  Outcome := Sigma o : ?.Outcome, (f (?value o)).Outcome
  outcomeFintype :=
    letI := ?.outcomeFintype
    letI : forall o : ?.Outcome, Fintype ((f (?value o)).Outcome) :=
      fun o => (f (?value o)).outcomeFintype
    inferInstance
  branch := fun p =>
    KrausFamily.comp ((f (?value p.1)).branch p.2) (?branch p.1)
  value := fun p => (f (?value p.1)).value p.2
  trace_nonincreasing := by
    intro ? h?
    let _ := ?.outcomeFintype
    let _ : forall o : ?.Outcome, Fintype ((f (?value o)).Outcome) :=
      fun o => (f (?value o)).outcomeFintype
    have hcont :
      forall o : ?.Outcome,
        (? o' : (f (?value o)).Outcome,
          (Matrix.trace
            (KrausFamily.applyMat
              (KrausFamily.comp ((f (?value o)).branch o') (?branch o))
              ?)).re) <=
            (Matrix.trace (KrausFamily.applyMat (?branch o) ?)).re := by
        intro o
        have hpos := KrausFamily.applyMat_posSemidef (?branch o) h?
        have hTNI := (f (?value o)).trace_nonincreasing
          (KrausFamily.applyMat (?branch o) ?) hpos
        refine le_trans ?_ hTNI
        refine Finset.sum_le_sum ?_

```

```

    intro o' _
    rw [KrausFamily.applyMat_comp]
  calc
    (? p : (Sigma o : ?.Outcome, (f (? .value o)).Outcome),
      (Matrix.trace
        (KrausFamily.applyMat
          (KrausFamily.comp ((f (? .value p.1)).branch p.2) (? .branch p.1))
            ?)).re)
      = ? o : ?.Outcome, ? o' : (f (? .value o)).Outcome,
        (Matrix.trace
          (KrausFamily.applyMat
            (KrausFamily.comp ((f (? .value o)).branch o') (? .branch o))
              ?)).re := by
          rw [Fintype.sum_sigma]
    _ <= ? o : ?.Outcome,
      (Matrix.trace (KrausFamily.applyMat (? .branch o) ?)).re :=
      Finset.sum_le_sum fun o _ => hcont o
    _ <= (Matrix.trace ?).re :=
      ?.trace_nonincreasing ? h?

/-- Wrap a single quantum operation as a computation returning `d`. -/
def ofOperation (? : QuantumOperation n n) (d : D) :
  FiniteInstrumentComp n D where
  Outcome := Unit
  branch := fun _ => ?.kraus
  value := fun _ => d
  trace_nonincreasing := by
    intro ? h?
    simp using ?.trace_nonincreasing ? h?

end FiniteInstrumentComp

namespace Qubit

/-- Pauli-X on a qubit. -/
def pauliX : KrausOperator 2 2 :=
  fun i j => if i = j then 0 else 1

theorem pauliX_conjTranspose : pauliX? = pauliX := by
  ext i j
  simp [pauliX, conjTranspose]
  fin_cases i <;> fin_cases j <;> simp

theorem pauliX_mul_self : pauliX? * pauliX = 1 := by
  rw [pauliX_conjTranspose]
  ext i j
  fin_cases i <;> fin_cases j <;> simp [pauliX, Matrix.mul_apply]

/-- Pauli-X as a quantum operation. -/
def pauliXOp : QuantumOperation 2 2 :=
  QuantumOperation.ofIsometry pauliX pauliX_mul_self

/-- Computational-basis projector  $|0\rangle\langle 0|$ . -/
def proj0 : KrausOperator 2 2 :=
  fun i j => if i = 0 /\ j = 0 then 1 else 0

/-- Computational-basis projector  $|1\rangle\langle 1|$ . -/
def proj1 : KrausOperator 2 2 :=

Lean 4 source (lines 801–867)

  fun i j => if i = 1 /\ j = 1 then 1 else 0

theorem proj0_mul_self : proj0 * proj0 = proj0 := by

```

```

    ext i j
    fin_cases i <;> fin_cases j <;> simp [proj0, Matrix.mul_apply]

theorem proj1_mul_self : proj1 * proj1 = proj1 := by
  ext i j
  fin_cases i <;> fin_cases j <;> simp [proj1, Matrix.mul_apply]

theorem proj0_conjTranspose : proj0? = proj0 := by
  ext i j
  fin_cases i <;> fin_cases j <;> simp [proj0, conjTranspose]

theorem proj1_conjTranspose : proj1? = proj1 := by
  ext i j
  fin_cases i <;> fin_cases j <;> simp [proj1, conjTranspose]

theorem proj0_add_proj1 : proj0 + proj1 = (1 : KrausOperator 2 2) := by
  ext i j
  fin_cases i <;> fin_cases j <;> simp [proj0, proj1]

theorem trace_proj_apply (P : KrausOperator 2 2)
  (hP : P * P = P) (hHerm : P? = P)
  (? : Matrix (Fin 2) (Fin 2) ?) :
  Matrix.trace (KrausFamily.applyMat [P] ?) = Matrix.trace (P * ?) := by
  rw [KrausFamily.applyMat_single, Matrix.trace_mul_comm (P * ?) P?, hHerm,
    <- Matrix.mul_assoc, hP]

/-- Computational-basis measurement as a two-outcome instrument. -/
def measureZ : QuantumInstrument 2 2 2 where
  branch := fun i => if i = 0 then [proj0] else [proj1]
  trace_nonincreasing := by
    intro ? _
    have h0 := trace_proj_apply proj0 proj0_mul_self proj0_conjTranspose ?
    have h1 := trace_proj_apply proj1 proj1_mul_self proj1_conjTranspose ?
    have hsum :
      Matrix.trace (proj0 * ?) + Matrix.trace (proj1 * ?) =
        Matrix.trace ? := by
      rw [ <- Matrix.trace_add, <- Matrix.add_mul, proj0_add_proj1, Matrix.one_mul]
    rw [Fin.sum_univ_two]
    have hne : (1 : Fin 2) != 0 := by decide
    simp only [hne, reduceIte]
    rw [h0, h1, <- Complex.add_re, hsum]

/-- Computational-basis measurement returning a boolean. -/
def measureZComp : FiniteInstrumentComp 2 Bool where
  Outcome := Bool
  branch := fun b => if b then [proj1] else [proj0]
  value := id
  trace_nonincreasing := by
    intro ? _
    have h0 := trace_proj_apply proj0 proj0_mul_self proj0_conjTranspose ?
    have h1 := trace_proj_apply proj1 proj1_mul_self proj1_conjTranspose ?
    have hsum :
      Matrix.trace (proj0 * ?) + Matrix.trace (proj1 * ?) =
        Matrix.trace ? := by
      rw [ <- Matrix.trace_add, <- Matrix.add_mul, proj0_add_proj1, Matrix.one_mul]
    rw [Fintype.sum_bool]
    change
      (KrausFamily.applyMat [proj1] ?).trace.re +
        (KrausFamily.applyMat [proj0] ?).trace.re <= _
    rw [h1, h0, <- Complex.add_re, add_comm, hsum]

end Qubit

```

end QLambda

A.42 QLambda/QuantumPower.lean

515 lines.

Lean 4 source (lines 1–400)

```
/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/
import QLambda.OmegaQVA
import Scott1972.ContinuousLattice.FunctionSpaces

/-!
# The quantum state powerdomain `Q(D)`

`IsQuantumPowerModel Q` is the conditional specification of a quantum
powerdomain: `Q` sends complete lattices to complete lattices, is a
Scott functor (including monotonicity and local continuity on monotone
`Nat`-families), and preserves `?QVA`.

The concrete computational layer starts from CP instruments in
`QLambda.QuantumInstrument`. A `QuantumPowerModel` is a bundled `Q`
with its instance. The capstone is parameterized by that bundle.
-/

namespace Scott1972.ContinuousLattice

universe u

set_option autoImplicit false
set_option relaxedAutoImplicit false

open DensityVec

/-- Conditional specification of a quantum powerdomain model. -/
class IsQuantumPowerModel (Q : (D : Type u) -> [CompleteLattice D] -> Type u) where
  str : forall (D : Type u) [CompleteLattice D], CompleteLattice (Q D)
  map : forall {D E : Type u} [CompleteLattice D] [CompleteLattice E],
    ScottMap D E ->
    letI := str D
    letI := str E
    ScottMap (Q D) (Q E)
  map_id : forall {D : Type u} [CompleteLattice D],
    letI := str D
    map (ScottMap.idMap : ScottMap D D) = ScottMap.idMap
  map_comp : forall {D E F : Type u} [CompleteLattice D] [CompleteLattice E] [CompleteLattice
    F]
    (f : ScottMap E F) (g : ScottMap D E),
    letI := str D
    letI := str E
    letI := str F
    map (f.comp g) = (map f).comp (map g)
  /-- Order-enriched: `Q` is monotone on Scott maps. Needed so that a
  projection `A ? B` lifts to `Q(A) ? Q(B)` (`mapProjection`). -/
  map_mono : forall {D E : Type u} [CompleteLattice D] [CompleteLattice E]
    {f g : ScottMap D E},
    letI := str D
    letI := str E
    f <= g -> map f <= map g
```



```

/-- Local continuity on monotone `Nat`-families: `Q( bigcup F n) = bigcup Q(F n)`.
This is the fragment of local continuity used to collapse
`i_inf comp j_inf = id` on `[D_inf -> Q(D_inf)]`. -/
map_iSup : forall {D E : Type u} [CompleteLattice D] [CompleteLattice E]
  (F : Nat -> ScottMap D E) (_hF : Monotone F),
  letI := str D
  letI := str E
  map ( bigcup n, F n) = bigcup n, map (F n)
closed : forall {D : Type u} [CompleteLattice D] (_h : IsOmegaQVA D),
  letI := str D
  IsOmegaQVA (Q D)

attribute [instance] IsQuantumPowerModel.str

/-- `j comp i = id` as Scott maps. -/
theorem IsContinuousLatticeProjection.retr_incl_comp {A B : Type u}
  [CompleteLattice A] [CompleteLattice B]
  (P : IsContinuousLatticeProjection A B) :
  P.retr.comp P.incl = ScottMap.idMap :=
  ScottMap.ext fun x => P.retr_incl x

/-- `i comp j sqsub id` as Scott maps. -/
theorem IsContinuousLatticeProjection.incl_retr_le_comp {A B : Type u}
  [CompleteLattice A] [CompleteLattice B]
  (P : IsContinuousLatticeProjection A B) :
  P.incl.comp P.retr <= ScottMap.idMap :=
  P.incl_retr_le

/-- A Scott functor sends a projection `A ? B` to a projection `Q(A) ? Q(B)`. -/
noncomputable def IsQuantumPowerModel.mapProjection
  {Q : (D : Type u) -> [CompleteLattice D] -> Type u} [inst : IsQuantumPowerModel Q]
  {A B : Type u} [CompleteLattice A] [CompleteLattice B]
  (P : IsContinuousLatticeProjection A B) :
  IsContinuousLatticeProjection (Q A) (Q B) :=
  letI := inst.str A
  letI := inst.str B
  { incl := inst.map P.incl
    retr := inst.map P.retr
    retr_incl := by
      intro d
      have hcomp := inst.map_comp (f := P.retr) (g := P.incl)
      have hid := inst.map_id (D := A)
      have hri := P.retr_incl_comp
      have : (inst.map P.retr).comp (inst.map P.incl) = ScottMap.idMap := by
        rw [ <- hcomp, hri, hid]
      exact congrArg (fun f : ScottMap (Q A) (Q A) => (f : Q A -> Q A) d) this
    incl_retr_le := by
      intro d
      have hcomp := inst.map_comp (f := P.incl) (g := P.retr)
      have hid := inst.map_id (D := B)
      have hle := inst.map_mono (f := P.incl.comp P.retr) (g := ScottMap.idMap)
      P.incl_retr_le_comp
      have : (inst.map P.incl).comp (inst.map P.retr) <= ScottMap.idMap :=
        calc (inst.map P.incl).comp (inst.map P.retr)
          = inst.map (P.incl.comp P.retr) := hcomp.symm
          <= inst.map ScottMap.idMap := hle
          = ScottMap.idMap := hid
      exact this d }

/-- A bundled quantum powerdomain: a `Q` that satisfies the spec. -/
structure QuantumPowerModel where
  Power : (D : Type u) -> [CompleteLattice D] -> Type u
  [spec : IsQuantumPowerModel Power]

```

```

attribute [instance] QuantumPowerModel.spec

/-- Carrier of the model at `D`. -/
abbrev QuantumPower (M : QuantumPowerModel) (D : Type u) [CompleteLattice D] : Type u :=
  M.Power D

/-- `[D -> Q(D)]` for the chosen model. -/
abbrev QuantumFunctor (M : QuantumPowerModel) (D : Type u) [CompleteLattice D] : Type u :=
  ScottMap D (M.Power D)

/-- `?QVA` is closed under the model's powerdomain. -/
abbrev omegaQVA_closed_under_quantumPower (M : QuantumPowerModel) {D : Type u}
  [CompleteLattice D] (h : IsOmegaQVA D) : IsOmegaQVA (M.Power D) :=
  IsQuantumPowerModel.closed (Q := M.Power) h

/-! Helpers for Cartesian closure of `?QVA`. -/
namespace FunctionSpaceOmega

variable {D E : Type u} [CompleteLattice D] [CompleteLattice E]

noncomputable def sampleStep (m : D) (b : ScottMap E E) :
  ScottMap (ScottMap D E) (ScottMap D E) :=
  <fun f => stepMap m (b (f m)), continuous_of_preservesDirectedSup <| by
    intro S hS hSdir
    apply ScottMap.ext
    intro x
    by_cases hmx : m << x
    * rw [stepMap_apply_of_wayBelow hmx]
      change b ((sSup S : ScottMap D E) m) =
        ((sSup ((fun f : ScottMap D E => stepMap m (b (f m))) ' S) :
          ScottMap D E) : D -> E) x
      have hdir : DirectedOn (* <= *)
        ((fun f : ScottMap D E => (f : D -> E) m) ' S) := by
          rintro _ <f, hf, rfl> _ <g, hg, rfl>
          obtain <k, hk, hfk, hgk> := hSdir f hf g hg
          exact <k m, <k, hk, rfl>, hfk m, hgk m>
      calc
        b ((sSup S : ScottMap D E) m) =
          b (sSup ((fun f : ScottMap D E => (f : D -> E) m) ' S)) := by
            rw [ScottMap.sSup_apply]
          _ = sSup (b ' ((fun f : ScottMap D E => (f : D -> E) m) ' S)) :=
            b.preservesDirectedSup_coe _
            (hS.image fun f : ScottMap D E => f m) hdir
          _ = ((sSup ((fun f : ScottMap D E => stepMap m (b (f m))) ' S) :
            ScottMap D E) : D -> E) x := by
            rw [ScottMap.sSup_apply]
            congr 1
            ext z
            constructor
            * rintro <_, <f, hf, rfl>, rfl>
              exact <stepMap m (b (f m)), <f, hf, rfl>,
                stepMap_apply_of_wayBelow hmx>
            * rintro <_, <f, hf, rfl>, rfl>
              exact <f m, <f, hf, rfl>,
                (stepMap_apply_of_wayBelow hmx).symm>
    * change stepFun m (b ((sSup S : ScottMap D E) m)) x =
      ((sSup ((fun f : ScottMap D E => stepMap m (b (f m))) ' S) :
        ScottMap D E) : D -> E) x
      rw [stepFun_of_not_wayBelow hmx, ScottMap.sSup_apply]
      apply le_antisymm bot_le
      refine sSup_le ?_
      rintro _ <_, <f, hf, rfl>, rfl>

```

```

    exact le_of_eq (stepFun_of_not_wayBelow hmx)>

noncomputable def sampleHull (M : Finset D) (b : ScottMap E E) :
  ScottMap (ScottMap D E) (ScottMap D E) :=
  M.sup fun m => sampleStep m b

theorem sampleHull_apply (M : Finset D) (b : ScottMap E E) (f : ScottMap D E) :
  sampleHull M b f = M.sup (fun m => stepMap m (b (f m))) := by
  classical
  unfold sampleHull
  induction M using Finset.induction_on with
  | empty => exact ScottMap.bot_apply f
  | @insert m M hm ih =>
    rw [Finset.sup_insert, Finset.sup_insert, ScottMap.sup_apply, ih]
    rfl

def repeatDims (dims : List Nat) : List D -> List Nat
| [] => []
| _ :: ms => dims ++ repeatDims dims ms

def encSamples {b : ScottMap E E} (q : QFactorable b) : (ms : List D) ->
  ScottMap D E -> DensityVec (repeatDims q.dims ms)
| [], _ => <>
| m :: ms, f => QFactorable.pairEnc (q.enc (f m)) (encSamples q ms f)

noncomputable def reconSamples {b : ScottMap E E} (q : QFactorable b) : (ms : List D) ->
  DensityVec (repeatDims q.dims ms) -> ScottMap D E
| [], _ => False
| m :: ms, v =>
  let p := QFactorable.pairUnenc (ns := q.dims) v
  stepMap m (q.recon p.1) sqsup reconSamples q ms p.2

theorem encSamples_mono {b : ScottMap E E} (q : QFactorable b) (ms : List D) :
  Monotone (encSamples q ms) := by
  induction ms with
  | nil => intro f g hfg; trivial
  | cons m ms ih =>
    intro f g hfg
    exact QFactorable.pairEnc_mono
      (show
        (q.enc (f m), encSamples q ms f) <=
        (q.enc (g m), encSamples q ms g) from
        <q.enc_mono (hfg m), ih hfg>)

theorem reconSamples_mono {b : ScottMap E E} (q : QFactorable b) (ms : List D) :
  Monotone (reconSamples q ms) := by
  induction ms with
  | nil => intro v w hvw; exact le_rfl
  | cons m ms ih =>
    intro v w hvw
    have hp := QFactorable.pairUnenc_mono (ns := q.dims) hvw
    exact sup_le_sup
      (show stepMap m (q.recon (QFactorable.pairUnenc (ns := q.dims) v).1) <=
        stepMap m (q.recon (QFactorable.pairUnenc (ns := q.dims) w).1) by
        rw [ScottMap.le_def]
        intro x
        by_cases hmx : m << x
        * simp only [stepMap_apply_of_wayBelow hmx]
        exact q.recon_mono hp.1
        * simp [stepMap, stepFun_of_not_wayBelow hmx])
      (ih hp.2)

theorem reconSamples_encSamples [DecidableEq D] {b : ScottMap E E} (q : QFactorable b)

```

```

    (ms : List D) (f : ScottMap D E) :
    reconSamples q ms (encSamples q ms f) =
      ms.toFinset.sup (fun m => stepMap m (b (f m))) := by
classical
induction ms with
| nil => rfl
| cons m ms ih =>
  simp only [encSamples, reconSamples, QFactorable.pairEnc_unenc,
    List.toFinset_cons, Finset.sup_insert]
  rw [q.factor, ih]

noncomputable def sampleFactorable (M : Finset D) {b : ScottMap E E}
  (q : QFactorable b) : QFactorable (sampleHull M b) := by
classical
exact
{ dims := repeatDims q.dims M.toList
  enc := encSamples q M.toList
  recon := reconSamples q M.toList
  enc_mono := encSamples_mono q M.toList
  recon_mono := reconSamples_mono q M.toList
  factor := fun f => by
    rw [sampleHull_apply, reconSamples_encSamples]
    rw [Finset.toList_toFinset] }

def QFactorable.sup {X : Type*} [CompleteLattice X]
  {f g : ScottMap X X} (hf : QFactorable f) (hg : QFactorable g) :
  QFactorable (f sqsup g) where
  dims := hf.dims ++ hg.dims
  enc := fun x => QFactorable.pairEnc (hf.enc x) (hg.enc x)
  recon := fun v =>
    let p := QFactorable.pairUnenc (ns := hf.dims) v
    hf.recon p.1 sqsup hg.recon p.2
  enc_mono := fun x y h =>
    QFactorable.pairEnc_mono
      (show (hf.enc x, hg.enc x) <= (hf.enc y, hg.enc y) from
        <hf.enc_mono h, hg.enc_mono h>)
  recon_mono := fun _ _ h => by
    have hp := QFactorable.pairUnenc_mono (ns := hf.dims) h
    exact sup_le_sup (hf.recon_mono hp.1) (hg.recon_mono hp.2)
  factor := fun x => by
    change (f sqsup g) x =
      hf.recon (QFactorable.pairUnenc
        (QFactorable.pairEnc (hf.enc x) (hg.enc x))).1 sqsup
      hg.recon (QFactorable.pairUnenc
        (QFactorable.pairEnc (hf.enc x) (hg.enc x))).2
    rw [QFactorable.pairEnc_unenc, <- hf.factor, <- hg.factor]
    exact ScottMap.sup_apply f g x

def QFactorable.bot {X : Type*} [CompleteLattice X] : QFactorable (False : ScottMap X X) where
  dims := []
  enc := fun _ => <>
  recon := fun _ => False
  enc_mono := fun _ _ _ => le_rfl
  recon_mono := fun _ _ _ => le_rfl
  factor := fun x => ScottMap.bot_apply x

theorem finitelySeparated_bot {X : Type*} [CompleteLattice X] :
  FinitelySeparated (False : ScottMap X X) := by
  refine <{(False : X)}, fun x => <(False : X), Finset.mem_singleton_self _, ?_, bot_le>>
  simp only [ScottMap.bot_apply] using (bot_le : (False : X) <= False)

theorem finitelySeparated_sup {X : Type*} [CompleteLattice X]
  {f g : ScottMap X X} (hf : FinitelySeparated f) (hg : FinitelySeparated g) :

```

```

    FinitelySeparated (f sqsup g) := by
classical
obtain <M, hM> := hf
obtain <N, hN> := hg
refine <(M.product N).image fun p => p.1 sqsup p.2, fun x => ?_>
obtain <m, hm, hfm, hmx> := hM x
obtain <n, hn, hgn, hnx> := hN x
refine <m sqsup n, Finset.mem_image.mpr
  <(m, n), Finset.mem_product.mpr <hm, hn>, rfl>, ?_, sup_le hmx hnx>
simpa [ScottMap.sup_apply] using sup_le_sup hfm hgn

theorem sampleHull_separated (M : Finset D)
  {b : ScottMap E E} (hb : FinitelySeparated b) :
  FinitelySeparated (sampleHull M b) := by
classical
obtain <N, hN> := hb
let A : Finset (M → E) := Fintype.piFinset fun _ : M => N
let mkMap : (M → E) → ScottMap D E :=
  fun v => M.attach.sup fun m => stepMap m.1 (v m)
refine <A.image mkMap, fun f => ?_>
have hv : forall m : M, exists n in N, b (f m.1) <= n /\ n <= f m.1 :=
  fun m => hN (f m.1)
choose v hv using hv
have hvA : v in A := by
  rw [Fintype.mem_piFinset]
  exact fun m => (hv m).1
refine <mkMap v, Finset.mem_image.mpr <v, hvA, rfl>, ?_, ?_>
* rw [sampleHull_apply]
  refine Finset.sup_le fun m hm => ?_
  calc
    stepMap m (b (f m)) <= stepMap m (v <m, hm>) := by
      rw [ScottMap.le_def]
      intro x
      by_cases hmx : m << x
      * simpa [stepMap_apply_of_wayBelow hmx] using (hv <m, hm>).2.1
      * simp [stepMap, stepFun_of_not_wayBelow hmx]
    _ <= M.attach.sup (fun p : M => stepMap p.1 (v p)) :=
      by
        have hle := Finset.le_sup (f := fun p : M => stepMap p.1 (v p))
          (Finset.mem_attach M (<m, hm> : M))
        exact hle
* refine Finset.sup_le fun m hm => ?_
  rw [ScottMap.le_def]
  intro x
  by_cases hmx : (m.1 : D) << x
  * rw [stepMap_apply_of_wayBelow hmx]
    exact (hv m).2.2.trans (f.monotone hmx.le)
  * simp [stepMap, stepFun_of_not_wayBelow hmx]

noncomputable def finiteHull (T : Nat → Nat → ScottMap (ScottMap D E) (ScottMap D E))
  (n : Nat) : ScottMap (ScottMap D E) (ScottMap D E) :=
  (Finset.range (n + 1)).sup fun i =>
    (Finset.range (n + 1)).sup fun j => T i j

theorem finiteHull_ge (T : Nat → Nat → ScottMap (ScottMap D E) (ScottMap D E))
  {i j n : Nat} (hi : i <= n) (hj : j <= n) : T i j <= finiteHull T n :=
  calc
    T i j <= (Finset.range (n + 1)).sup (fun j => T i j) :=
      Finset.le_sup (f := fun j => T i j)
        (Finset.mem_range.mpr (Nat.lt_succ_of_le hj))
    _ <= finiteHull T n :=
      Finset.le_sup (f := fun i =>
        (Finset.range (n + 1)).sup fun j => T i j)

```

```

      (Finset.mem_range.mpr (Nat.lt_succ_of_le hi))

theorem finiteHull_mono (T : Nat → Nat → ScottMap (ScottMap D E) (ScottMap D E)) :
  Monotone (finiteHull T) := by
  intro n k hnk
  refine Finset.sup_le fun i hi => Finset.sup_le fun j hj => finiteHull_ge T
    ((Nat.lt_succ_iff.mpr (Finset.mem_range.mpr hi)).trans hnk)
    ((Nat.lt_succ_iff.mpr (Finset.mem_range.mpr hj)).trans hnk)

noncomputable def qFactorableFinsetSup {X I : Type*} [CompleteLattice X]
  (s : Finset I) (f : I → ScottMap X X) (hf : forall i in s, QFactorable (f i)) :
  QFactorable (s.sup f) :=
  Classical.choice <| by
    classical
    induction s using Finset.induction_on with
    | empty => exact <QFactorable.bot>
    | @insert i s hi ih =>
      rw [Finset.sup_insert]
      exact <QFactorable.sup (hf i (Finset.mem_insert_self i s))
        (Classical.choice (ih fun j hj => hf j (Finset.mem_insert_of_mem hj)))>

theorem finitelySeparated_finsetSup {X I : Type*} [CompleteLattice X]
  (s : Finset I) (f : I → ScottMap X X)
  (hf : forall i in s, FinitelySeparated (f i)) :
  FinitelySeparated (s.sup f) := by
  classical
  induction s using Finset.induction_on with
  | empty => exact finitelySeparated_bot
  | @insert i s hi ih =>
    rw [Finset.sup_insert]
    exact finitelySeparated_sup (hf i (Finset.mem_insert_self i s))

```

Lean 4 source (lines 401–515)

```

      (ih fun j hj => hf j (Finset.mem_insert_of_mem hj))

noncomputable def finiteHull_factorable
  (T : Nat → Nat → ScottMap (ScottMap D E) (ScottMap D E))
  (hT : forall i j, QFactorable (T i j)) (n : Nat) :
  QFactorable (finiteHull T n) := by
  classical
  unfold finiteHull
  exact qFactorableFinsetSup _ _ fun i hi =>
    qFactorableFinsetSup _ _ fun j hj => hT i j

theorem finiteHull_separated
  (T : Nat → Nat → ScottMap (ScottMap D E) (ScottMap D E))
  (hT : forall i j, FinitelySeparated (T i j)) (n : Nat) :
  FinitelySeparated (finiteHull T n) := by
  classical
  unfold finiteHull
  exact finitelySeparated_finsetSup _ _ fun i hi =>
    finitelySeparated_finsetSup _ _ fun j hj => hT i j

theorem map_approx_iSup {X Y : Type*} [CompleteLattice X] [CompleteLattice Y]
  (hX : IsOmegaQVA X) (f : ScottMap X Y) (x : X) :
  f x = bigcup n, f (hX.approx n x) := by
  have hx : x = bigcup n, (hX.approx n : X → X) x := by
    simpa [scottMap_iSup_apply, ScottMap.idMap_apply] using
      (congrArg (fun g : ScottMap X X => (g : X → X) x) hX.iSup_approx).symm
  have hdir : DirectedOn (* <= *)
    (Set.range fun n => (hX.approx n : X → X) x) :=
    directedOn_range.2 fun i j =>
      <max i j, hX.monotone_approx (le_max_left i j) x,

```

```

      hX.monotone_approx (le_max_right i j) x>
calc
  f x = f (sSup (Set.range fun n => (hX.approx n : X -> X) x)) := by
    exact congrArg (f : X -> Y) (by rw [sSup_range]; exact hx)
  _ = sSup (f '' Set.range (fun n => (hX.approx n : X -> X) x)) :=
    f.preservesDirectedSup_coe _ (Set.range_nonempty _) hdir
  _ = bigcup n, f (hX.approx n x) := by
    rw [ <- Set.range_comp, sSup_range]
    rfl

end FunctionSpaceOmega

/-- `?QVA` is Cartesian closed (not a field of the quantum-power spec). -/
noncomputable def omegaQVA_closed_under_functionSpace {D E : Type u}
  [CompleteLattice D] [CompleteLattice E]
  (hD : IsOmegaQVA D) (hE : IsOmegaQVA E) : IsOmegaQVA (ScottMap D E) := by
  let M : Nat -> Finset D := fun i => Classical.choose (hD.separated i)
  have hM : forall i x, exists m in M i, (hD.approx i : D -> D) x <= m /\ m <= x :=
    fun i => Classical.choose_spec (hD.separated i)
  let T : Nat -> Nat -> ScottMap (ScottMap D E) (ScottMap D E) :=
    fun i j => FunctionSpaceOmega.sampleHull (M i) (hE.approx j)
  exact
  { isContinuousLattice :=
      theorem_3_3_isContinuousLattice hD.isContinuousLattice hE.isContinuousLattice
    approx := FunctionSpaceOmega.finiteHull T
    qfactorable := fun n => FunctionSpaceOmega.finiteHull_factorable T
      (fun i j => FunctionSpaceOmega.sampleFactorable (M i) (hE.qfactorable j)) n
    separated := fun n => FunctionSpaceOmega.finiteHull_separated T
      (fun i j => FunctionSpaceOmega.sampleHull_separated (M i) (hE.separated j)) n
    monotone_approx := FunctionSpaceOmega.finiteHull_mono T
    iSup_approx := by
      apply ScottMap.ext
      intro f
      apply ScottMap.ext
      intro x
      rw [scottMap_iSup_apply, ScottMap.idMap_apply]
      change (( bigcup n, FunctionSpaceOmega.finiteHull T n f) : ScottMap D E) x = f x
      rw [show ( bigcup n, FunctionSpaceOmega.finiteHull T n f) =
          sSup (Set.range fun n => FunctionSpaceOmega.finiteHull T n f) from
          sSup_range.symm,
          ScottMap.sSup_apply, <- Set.range_comp, sSup_range]
      apply le_antisymm
    * refine iSup_le fun n => ?_
      have hn := finitelySeparated_le_id
        (FunctionSpaceOmega.finiteHull_separated T
          (fun i j => FunctionSpaceOmega.sampleHull_separated
            (M i) (hE.separated j)) n) f
      exact hn x
    * have hfx : f x =
        sSup ((f : D -> E) '' {y : D | y << x}) := by
          rw [ <- f.preservesDirectedSup_coe {y : D | y << x}
            <False, bot_wayBelow x> (directedOn_wayBelow x),
            hD.isContinuousLattice.sSup_wayBelow x]
      rw [hfx]
      refine sSup_le ?_
      rintro _ <y, hyx, rfl>
      rw [FunctionSpaceOmega.map_approx_iSup hD f y]
      refine iSup_le fun i => ?_
      rw [show f (hD.approx i y) =
          bigcup j, hE.approx j (f (hD.approx i y)) by
          simp [ScottMap.idMap_apply] using
            FunctionSpaceOmega.map_approx_iSup hE
            (ScottMap.idMap : ScottMap E E) (f (hD.approx i y))]]

```

```

refine iSup_le fun j => ?_
obtain <m, hmM, haim, hmy> := hM i y
have hmx : m << x := WayBelow.le_trans hmy hyx
let n := max i j
calc
  hE.approx j (f (hD.approx i y)) <= hE.approx j (f m) :=
    (hE.approx j).monotone (f.monotone haim)
  _ = (stepMap m (hE.approx j (f m)) : D -> E) x :=
    (stepMap_apply_of_wayBelow hmx).symm
  _ <= ((FunctionSpaceOmega.sampleHull (M i) (hE.approx j) f :
    ScottMap D E) : D -> E) x := by
    rw [FunctionSpaceOmega.sampleHull_apply]
    exact Finset.le_sup (f := fun m =>
      stepMap m (hE.approx j (f m))) hmM x
  _ <= (FunctionSpaceOmega.finiteHull T n f : D -> E) x :=
    FunctionSpaceOmega.finiteHull_ge T
      (le_max_left i j) (le_max_right i j) f x
  _ <= bigcup n, (FunctionSpaceOmega.finiteHull T n f : D -> E) x :=
    le_iSup (fun n =>
      (FunctionSpaceOmega.finiteHull T n f : D -> E) x) n }

end Scott1972.ContinuousLattice

```

A.43 QLambda/QuantumStateSpace.lean

115 lines.

Lean 4 source

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/

import Mathlib.Analysis.InnerProductSpace.Basic
import Mathlib.Analysis.Matrix.Order
import Mathlib.Analysis.SpecialFunctions.Exp
import Mathlib.LinearAlgebra.Matrix.PosDef
import Mathlib.LinearAlgebra.Matrix.Trace

/-!
# Sub-normalized density operators (Loewner order)
-/

open Matrix
open scoped MatrixOrder ComplexOrder

/-- Sub-normalized density operator on `M_n(?)`: positive semidefinite
with real trace at most one. -/
structure SubNormalizedDensity (n : Nat) where
  mat : Matrix (Fin n) (Fin n) ?
  posSemidef : mat.PosSemidef
  trace_le_one : (Matrix.trace mat).re <= 1

namespace SubNormalizedDensity

variable {n : Nat}

@[ext]
theorem ext {? sigma : SubNormalizedDensity n} (h : ?.mat = sigma.mat) : ? = sigma := by
  cases ?; cases sigma; congr

/-- Loewner order: `? <= sigma` iff `sigma` is positive semidefinite. -/

```



```

instance : PartialOrder (SubNormalizedDensity n) where
  le ? sigma := ?.mat <= sigma.mat
  le_refl ? := le_refl ?.mat
  le_trans ? sigma tau := le_trans
  le_antisymm ? sigma h?sigma hsigma? := ext (le_antisymm h?sigma hsigma?)

theorem le_def {? sigma : SubNormalizedDensity n} :
  ? <= sigma <-> ?.mat <= sigma.mat :=
  Iff.rfl

theorem le_iff {? sigma : SubNormalizedDensity n} :
  ? <= sigma <-> (sigma.mat - ?.mat).PosSemidef :=
  Iff.rfl

/-- If `A` and `-A` are both positive semidefinite, then `A = 0`. -/
theorem le_antisymm_of_posSemidef_neg {A : Matrix (Fin n) (Fin n) ?}
  (hA : A.PosSemidef) (hneg : (-A).PosSemidef) : A = 0 := by
  have h_1 : (0 : Matrix (Fin n) (Fin n) ?) <= A := by
    simp [nonneg_iff_posSemidef] using hA
  have h_2 : A <= (0 : Matrix (Fin n) (Fin n) ?) := by
    rw [Matrix.le_iff, zero_sub]
    exact hneg
  exact le_antisymm h_2 h_1

theorem re_trace_nonneg (? : SubNormalizedDensity n) :
  0 <= (Matrix.trace ?.mat).re := by
  have hsum : (Matrix.trace ?.mat).re = ? i : Fin n, (?mat i i).re := by
    simp [Matrix.trace]
  rw [hsum]
  exact Finset.sum_nonneg fun i _ =>
    (RCLike.nonneg_iff (K := ?).mp (?posSemidef.diag_nonneg (i := i))).1

instance : OrderBot (SubNormalizedDensity n) where
  bot := <0, PosSemidef.zero, by simp [Matrix.trace_zero]>
  bot_le ? := by
    change (?mat - 0).PosSemidef
    simp using ?.posSemidef

theorem mat_bot : (False : SubNormalizedDensity n).mat = 0 := rfl

noncomputable def spectralScale (t : ?) : ? := Real.exp (-max t 0)

theorem spectralScale_nonneg (t : ?) : 0 <= spectralScale t :=
  Real.exp_nonneg _

theorem spectralScale_le_one (t : ?) : spectralScale t <= 1 :=
  Real.exp_le_one_iff.mpr (neg_nonpos.mpr (le_max_right t 0))

theorem spectralScale_of_nonneg {t : ?} (ht : 0 <= t) :
  spectralScale t = Real.exp (-t) := by
  simp [spectralScale, ht]

/-- Spectral depletion flow: `?_t(?) = e^{-max(t,0)} ?`. -/
noncomputable def spectralErode (t : ?) (? : SubNormalizedDensity n) :
  SubNormalizedDensity n where
  mat := spectralScale t * ?.mat
  posSemidef := ?.posSemidef.smul (spectralScale_nonneg t)
  trace_le_one := by
    have hre := ?.re_trace_nonneg
    calc
      (Matrix.trace (spectralScale t * ?.mat)).re
      = spectralScale t * (Matrix.trace ?.mat).re := by
        simp [Matrix.trace_smul]

```

```

_   <= 1 * (Matrix.trace ?.mat).re :=
      mul_le_mul_of_nonneg_right (spectralScale_le_one t) hre
_   = (Matrix.trace ?.mat).re := one_mul _
_   <= 1 := ?.trace_le_one

theorem spectralErode_mat (t : ?) (? : SubNormalizedDensity n) :
  (spectralErode t ?).mat = spectralScale t * ?.mat := rfl

theorem spectralErode_mono {t : ?} (_ht : 0 <= t) {? sigma : SubNormalizedDensity n}
  (h : ? <= sigma) : spectralErode t ? <= spectralErode t sigma := by
  change ((spectralErode t sigma).mat - (spectralErode t ?).mat).PosSemidef
  have : (spectralErode t sigma).mat - (spectralErode t ?).mat =
    spectralScale t * (sigma.mat - ?.mat) := by
    simp [spectralErode_mat, smul_sub]
  rw [this]
  exact (le_iff.mp h).smul (spectralScale_nonneg t)

end SubNormalizedDensity

```

A.44 QLambda/RationalCP.lean

204 lines.

Lean 4 source

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/
import QLambda.ObservationBasis

open Matrix
open scoped ComplexOrder MatrixOrder

namespace QLambda

/-- A matrix in Choi coordinates whose entries are Gaussian rationals. -/
abbrev RatChoiMatrix (n : Nat) :=
  Matrix (Fin n x Fin n) (Fin n x Fin n) RatComplex

noncomputable instance (n : Nat) : Encodable (RatChoiMatrix n) := by
  classical
  unfold RatChoiMatrix Matrix
  infer_instance

instance (n : Nat) : Countable (RatChoiMatrix n) :=
  Encodable.countable

namespace RatChoiMatrix

/-- Coordinatewise embedding of a rational Choi matrix into a complex matrix. -/
def toComplex {n : Nat} (M : RatChoiMatrix n) :
  Matrix (Fin n x Fin n) (Fin n x Fin n) ? :=
  fun i j => M i j

@[simp] theorem toComplex_apply {n : Nat} (M : RatChoiMatrix n)
  (i j : Fin n x Fin n) :
  M.toComplex i j = (M i j : ?) :=
  rfl

end RatChoiMatrix

```

```

/-- A Gaussian-rational Choi matrix together with a semantic PSD certificate. -/
structure RatCPMatrix (n : Nat) where
  matrix : RatChoiMatrix n
  posSemidef : matrix.toComplex.PosSemidef

namespace RatCPMatrix

instance (n : Nat) : Countable (RatCPMatrix n) :=
  (show Function.Injective (matrix : RatCPMatrix n -> RatChoiMatrix n) from
    fun A B h => by
      cases A
      cases B
      simp_all).countable

noncomputable instance (n : Nat) : Encodable (RatCPMatrix n) := by
  classical
  let e : RatCPMatrix n ? {M : RatChoiMatrix n // M.toComplex.PosSemidef} := {
    toFun M := <M.matrix, M.posSemidef>
    invFun M := <M.1, M.2>
    left_inv _ := rfl
    right_inv _ := rfl }
  exact Encodable.ofEquiv _ e

/-- The complex matrix denoted by a rational CP code. -/
def toComplex {n : Nat} (M : RatCPMatrix n) :
  Matrix (Fin n x Fin n) (Fin n x Fin n) ? :=
  M.matrix.toComplex

theorem toComplex_posSemidef {n : Nat} (M : RatCPMatrix n) :
  M.toComplex.PosSemidef :=
  M.posSemidef

/-- A chosen finite Kraus realization of the coded rational Choi matrix. -/
noncomputable def realize {n : Nat} (M : RatCPMatrix n) : KrausFamily n n :=
  Classical.choose (KrausFamily.exists_krausFamily_choi_eq M.posSemidef)

@[simp] theorem choi_realize {n : Nat} (M : RatCPMatrix n) :
  KrausFamily.choi M.realize = M.toComplex :=
  Classical.choose_spec (KrausFamily.exists_krausFamily_choi_eq M.posSemidef)

theorem realize_refines {n : Nat} {M N : RatCPMatrix n}
  (h : M.toComplex <= N.toComplex) :
  KrausFamily.Refines M.realize N.realize := by
  apply KrausFamily.residualRefines_of_choiRefines
  simpa [KrausFamily.ChoiRefines] using h

/-- Gaussian-rational Choi code for the identity channel. -/
noncomputable def identity (n : Nat) : RatCPMatrix n where
  matrix := fun p q =>
    if p.1 = p.2 /\ q.1 = q.2 then 1 else 0
  posSemidef := by
    have h :=
      KrausFamily.choi_posSemidef (KrausFamily.identity n)
    convert h using 1
  ext p q
  change
    ((if p.1 = p.2 /\ q.1 = q.2 then 1 else 0) :
      RatComplex) : ?) = _
  by_cases hp : p.1 = p.2 <;> by_cases hq : q.1 = q.2 <;>
  simp [hp, hq, KrausFamily.identity, KrausFamily.choiTerm,
    Matrix.one_apply]

```

```

@[simp]
theorem toComplex_identity (n : Nat) :
  (identity n).toComplex =
    KrausFamily.choi (KrausFamily.identity n) := by
  ext p q
  change
    (((if p.1 = p.2 /\ q.1 = q.2 then 1 else 0) :
      RatComplex) : ?) = _
  by_cases hp : p.1 = p.2 <;> by_cases hq : q.1 = q.2 <;>
  simp [hp, hq, KrausFamily.identity,
    KrausFamily.choiTerm, Matrix.one_apply]

theorem realize_identity_semEq (n : Nat) :
  KrausFamily.SemEq (identity n).realize
    (KrausFamily.identity n) := by
  apply KrausFamily.semEq_of_choi_eq
  rw [choi_realize, toComplex_identity]

end RatCPMatrix

/-- A rational completely positive code whose chosen Kraus realization is
trace-nonincreasing. The certificate is semantic, while countability comes
from the underlying rational Choi matrix. -/
structure RatTNICPMatrix (n : Nat) where
  cp : RatCPMatrix n
  trace_nonincreasing :
    forall ? : Matrix (Fin n) (Fin n) ?, ?PosSemidef ->
      (Matrix.trace (KrausFamily.applyMat cp.realize ?)).re <=
        (Matrix.trace ?).re

namespace RatTNICPMatrix

instance (n : Nat) : Countable (RatTNICPMatrix n) :=
  (show Function.Injective (cp : RatTNICPMatrix n -> RatCPMatrix n) from
    fun A B h => by
      cases A
      cases B
      simp_all).countable

noncomputable instance (n : Nat) : Encodable (RatTNICPMatrix n) := by
  classical
  let isTNI (M : RatCPMatrix n) : Prop :=
    forall ? : Matrix (Fin n) (Fin n) ?, ?PosSemidef ->
      (Matrix.trace (KrausFamily.applyMat M.realize ?)).re <=
        (Matrix.trace ?).re
  let e : RatTNICPMatrix n ? {M : RatCPMatrix n // isTNI M} := {
    toFun M := <M.cp, M.trace_nonincreasing>
    invFun M := <M.1, M.2>
    left_inv _ := rfl
    right_inv _ := rfl }
  exact Encodable.ofEquiv _ e

/-- The rational Choi matrix carried by a TNI code. -/
def matrix {n : Nat} (M : RatTNICPMatrix n) : RatChoiMatrix n :=
  M.cp.matrix

/-- The complex Choi matrix denoted by a rational TNI code. -/
def toComplex {n : Nat} (M : RatTNICPMatrix n) :
  Matrix (Fin n x Fin n) (Fin n x Fin n) ? :=
  M.cp.toComplex

theorem toComplex_posSemidef {n : Nat} (M : RatTNICPMatrix n) :
  M.toComplex.PosSemidef :=

```

```

M.cp.toComplex_posSemidef

/-- The chosen Kraus realization of a rational TNI code. -/
noncomputable def realize {n : Nat} (M : RatTNICPMatrix n) : KrausFamily n n :=
  M.cp.realize

@[simp] theorem choi_realize {n : Nat} (M : RatTNICPMatrix n) :
  KrausFamily.choi M.realize = M.toComplex :=
  M.cp.choi_realize

theorem realize_refines {n : Nat} {M N : RatTNICPMatrix n}
  (h : M.toComplex <= N.toComplex) :
  KrausFamily.Refines M.realize N.realize :=
  RatCPMatrix.realize_refines h

/-- Rational TNI code for the identity channel. -/
noncomputable def identity (n : Nat) : RatTNICPMatrix n where
  cp := RatCPMatrix.identity n
  trace_nonincreasing := by
    intro ? _
    rw [RatCPMatrix.realize_identity_semEq,
      KrausFamily.applyMat_identity]

theorem realize_identity_semEq (n : Nat) :
  KrausFamily.SemEq (identity n).realize
    (KrausFamily.identity n) :=
  RatCPMatrix.realize_identity_semEq n

/-- Realize a rational TNI code as a physical quantum operation. -/
noncomputable def toQuantumOperation {n : Nat} (M : RatTNICPMatrix n) :
  QuantumOperation n n where
  kraus := M.realize
  trace_nonincreasing := M.trace_nonincreasing

@[simp] theorem toQuantumOperation_kraus {n : Nat} (M : RatTNICPMatrix n) :
  M.toQuantumOperation.kraus = M.realize :=
  rfl

end RatTNICPMatrix

end QLambda

```

A.45 QLambda/RationalComplex.lean

194 lines.

Lean 4 source

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/
import Mathlib.Data.Complex.Basic
import Mathlib.Data.Rat.Encodable
import Mathlib.Logic.Equiv.Fin.Basic
import Mathlib.Logic.Encodable.Pi
import Mathlib.Topology.Instances.Complex
import Mathlib.Topology.Instances.Rat

/-!
# Gaussian-rational test vectors

```

Choi matrices live over $\mathbb{Q}$, but finite observations only need vectors with rational real and imaginary parts. These form a countable dense subfield and therefore give a countable family of quadratic tests in each fixed finite dimension.

-/

namespace QLambda

/-- A Gaussian rational, represented without quotienting or normalization overhead. -/

@[ext]

structure RatComplex where

re : ?

im : ?

deriving DecidableEq

namespace RatComplex

/-- The Gaussian-rational imaginary unit. -/

def I : RatComplex := <0, 1>

def equivProd : RatComplex ? ? x ? where

toFun z := (z.re, z.im)

invFun p := <p.1, p.2>

left_inv _ := rfl

right_inv _ := rfl

instance : Encodable RatComplex :=

Encodable.ofEquiv (? x ?) equivProd

instance : Zero RatComplex := <<0, 0>>

instance : One RatComplex := <<1, 0>>

instance : Add RatComplex := <fun z w => <z.re + w.re, z.im + w.im>>

instance : Neg RatComplex := <fun z => <-z.re, -z.im>>

instance : Sub RatComplex := <fun z w => <z.re - w.re, z.im - w.im>>

instance : Mul RatComplex :=

<fun z w => <z.re * w.re - z.im * w.im, z.re * w.im + z.im * w.re>>

instance : Star RatComplex := <fun z => <z.re, -z.im>>

@[simp] theorem zero_re : (0 : RatComplex).re = 0 := rfl

@[simp] theorem zero_im : (0 : RatComplex).im = 0 := rfl

@[simp] theorem one_re : (1 : RatComplex).re = 1 := rfl

@[simp] theorem one_im : (1 : RatComplex).im = 0 := rfl

@[simp] theorem add_re (z w : RatComplex) : (z + w).re = z.re + w.re := rfl

@[simp] theorem add_im (z w : RatComplex) : (z + w).im = z.im + w.im := rfl

@[simp] theorem neg_re (z : RatComplex) : (-z).re = -z.re := rfl

@[simp] theorem neg_im (z : RatComplex) : (-z).im = -z.im := rfl

@[simp] theorem sub_re (z w : RatComplex) : (z - w).re = z.re - w.re := rfl

@[simp] theorem sub_im (z w : RatComplex) : (z - w).im = z.im - w.im := rfl

@[simp] theorem mul_re (z w : RatComplex) :

(z * w).re = z.re * w.re - z.im * w.im := rfl

@[simp] theorem mul_im (z w : RatComplex) :

(z * w).im = z.re * w.im + z.im * w.re := rfl

@[simp] theorem star_re (z : RatComplex) : (star z).re = z.re := rfl

@[simp] theorem star_im (z : RatComplex) : (star z).im = -z.im := rfl

/-- The canonical embedding of Gaussian rationals into the complex numbers. -/

def toComplex (z : RatComplex) : ? :=

(z.re : ?) + (z.im : ?) * Complex.I

instance : Coe RatComplex ? := <toComplex>

```

@[simp] theorem toComplex_re (z : RatComplex) :
  ((z : ?).re) = z.re := by
  simp [toComplex]

@[simp] theorem toComplex_im (z : RatComplex) :
  ((z : ?).im) = z.im := by
  simp [toComplex]

@[simp] theorem toComplex_zero : ((0 : RatComplex) : ?) = 0 := by
  apply Complex.ext <;> simp [toComplex]

@[simp] theorem toComplex_one : ((1 : RatComplex) : ?) = 1 := by
  apply Complex.ext <;> simp [toComplex]

@[simp] theorem toComplex_I : ((I : RatComplex) : ?) = Complex.I := by
  apply Complex.ext <;> simp [I, toComplex]

@[simp] theorem toComplex_add (z w : RatComplex) :
  ((z + w : RatComplex) : ?) = (z : ?) + (w : ?) := by
  apply Complex.ext <;> simp [toComplex]

@[simp] theorem toComplex_neg (z : RatComplex) :
  ((-z : RatComplex) : ?) = -(z : ?) := by
  apply Complex.ext <;> simp [toComplex]

@[simp] theorem toComplex_sub (z w : RatComplex) :
  ((z - w : RatComplex) : ?) = (z : ?) - (w : ?) := by
  apply Complex.ext <;> simp [toComplex]

@[simp] theorem toComplex_mul (z w : RatComplex) :
  ((z * w : RatComplex) : ?) = (z : ?) * (w : ?) := by
  apply Complex.ext <;> simp [toComplex]

@[simp] theorem toComplex_star (z : RatComplex) :
  ((star z : RatComplex) : ?) = star (z : ?) := by
  apply Complex.ext <;> simp [toComplex]

/-- Gaussian rationals are dense in the complex numbers. -/
theorem denseRange_toComplex : DenseRange toComplex := by
  let f : ? x ? -> ? x ? := Prod.map Rat.cast Rat.cast
  have hf : DenseRange f := Rat.denseRange_cast.prodMap Rat.denseRange_cast
  let g : ? x ? -> ? :=
    fun p => Complex.ofReal p.1 + Complex.I * Complex.ofReal p.2
  have hg : Function.Surjective g := by
    intro z
    exact <(z.re, z.im), by apply Complex.ext <;> simp [g]>
  have hgc : Continuous g :=
    (Complex.continuous_ofReal.comp continuous_fst).add
    (continuous_const.mul (Complex.continuous_ofReal.comp continuous_snd))
  have h := hg.denseRange.comp hf hgc
  rw [denseRange_iff_closure_range]
  rw [show Set.range toComplex =
    Set.range (fun p : ? x ? => (p.1 : ?) + Complex.I * (p.2 : ?)) by
    ext z
    constructor
    * rintro <q, rfl>
    exact <(q.re, q.im), by
      apply Complex.ext <;> simp [toComplex]>
    * rintro <p, rfl>
    exact <(<p.1, p.2> : RatComplex), by
      apply Complex.ext <;> simp [toComplex]>]
  exact denseRange_iff_closure_range.mp

```

```

    (by simp [f, g, Function.comp_def] using h)

instance : Countable RatComplex :=
  Encodable.countable

end RatComplex

/-- A Gaussian-rational vector in Choi coordinates. The product index
matches `KrausFamily.choi` directly. -/
abbrev RatChoiVec (n : Nat) :=
  Fin (n * n) -> RatComplex

instance (n : Nat) : Encodable (RatChoiVec n) :=
  Encodable.finArrow

instance (n : Nat) : Countable (RatChoiVec n) :=
  Encodable.countable

/-- Embed a rational Choi vector coordinatewise into `?`. -/
def RatChoiVec.toComplex {n : Nat} (v : RatChoiVec n) :
  Fin n x Fin n -> ? :=
  fun i => v (finProdFinEquiv i)

@[simp]
theorem RatChoiVec.toComplex_add {n : Nat} (v w : RatChoiVec n) :
  RatChoiVec.toComplex (v + w) =
    RatChoiVec.toComplex v + RatChoiVec.toComplex w := by
  funext i
  exact RatComplex.toComplex_add _ _

@[simp]
theorem RatChoiVec.toComplex_neg {n : Nat} (v : RatChoiVec n) :
  RatChoiVec.toComplex (-v) = -RatChoiVec.toComplex v := by
  funext i
  exact RatComplex.toComplex_neg _

/-- A rational coordinate vector. -/
def RatChoiVec.single {n : Nat} (i : Fin (n * n)) : RatChoiVec n :=
  fun j => if j = i then 1 else 0

@[simp]
theorem RatChoiVec.single_apply_self {n : Nat} (i : Fin (n * n)) :
  RatChoiVec.single i i = 1 := by
  simp [RatChoiVec.single]

@[simp]
theorem RatChoiVec.toComplex_single {n : Nat} (p : Fin n x Fin n) :
  (RatChoiVec.single (finProdFinEquiv p)).toComplex =
    Pi.single p (1 : ?) := by
  funext i
  by_cases h : i = p <|>
  simp [RatChoiVec.toComplex, RatChoiVec.single, h]

end QLambda

```

A.46 QLambda/RefinementCounterexample.lean

297 lines.

Lean 4 source

/-

Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.

```

-/
import QLambda.PhysicalTheory

/-!
# Choi observations do not characterize TT refinement

This file gives a rational, two-dimensional counterexample. The classical
output is the four-element diamond `Bool x Bool`. A bottom branch completes
each instrument to a trace-preserving one; every proper upper observation
therefore sees exactly the three branches responsible for the counterexample.
-/

open Matrix
open scoped BigOperators ComplexConjugate ComplexOrder MatrixOrder

namespace QLambda.RefinementCounterexample

abbrev Diamond := Bool x Bool

local instance diamondPreorder : Preorder Diamond where
  le x y := x.1 <= y.1 /\ x.2 <= y.2
  lt x y := (x.1 <= y.1 /\ x.2 <= y.2) /\
    not (y.1 <= x.1 /\ y.2 <= x.2)
  le_refl := by
    rintro <a, b>
    cases a <;> cases b <;> simp
  le_trans := by
    rintro <a_0, a_1> <b_0, b_1> <c_0, c_1> hab hbc
    cases a_0 <;> cases a_1 <;> cases b_0 <;> cases b_1 <;>
      cases c_0 <;> cases c_1 <;> simp_all
  lt_iff_le_not_ge := by intros; rfl

private noncomputable def quarter : ? := <1 / 4, 0>

private noncomputable def k (x y : ?) : KrausOperator 2 2 :=
  fun i j => if i = 0 then if j = 0 then x * quarter else y * quarter else 0

private def l (x y : ?) : KrausOperator 2 2 :=
  fun i j => if j = 0 then if i = 0 then x else y else 0

private def copies (n : Nat) (A : KrausOperator 2 2) : KrausFamily 2 2 :=
  List.replicate n A

private noncomputable def muBranch : Diamond -> KrausFamily 2 2
| (false, false) => copies 9 (k 1 0) ++ copies 9 (k 0 1)
| (true, false) => copies 2 (k 1 0) ++ copies 2 (k 0 1)
| (false, true) => copies 5 (k 1 0) ++ copies 5 (k 0 1)
| (true, true) => []

private noncomputable def nuBranch : Diamond -> KrausFamily 2 2
| (false, false) =>
  copies 2 (k 1 (-1)) ++ copies 3 (k 1 0) ++ copies 6 (k 0 1)
| (true, false) => copies 2 (k 1 1) ++ [k 0 1]
| (false, true) => copies 2 (k 1 (-1)) ++ copies 3 (k 1 0)
| (true, true) => copies 2 (k 1 1) ++ copies 2 (k 1 0) ++ [k 0 1]

private theorem mu_trace (? : Matrix (Fin 2) (Fin 2) ?) :
  ? o : Diamond,
  (Matrix.trace (KrausFamily.applyMat (muBranch o) ?)).re =
  (Matrix.trace ?).re := by

```

```

rw [Fintype.sum_prod_type]
simp only [Fintype.sum_bool]
simp [muBranch, copies, k, quarter, KrausFamily.applyMat, Matrix.mul_apply,
      Matrix.trace, conjTranspose]
norm_num
ring

private theorem nu_trace (? : Matrix (Fin 2) (Fin 2) ?) :
  ? o : Diamond,
    (Matrix.trace (KrausFamily.applyMat (nuBranch o ?)).re =
      (Matrix.trace ?).re := by
    rw [Fintype.sum_prod_type]
    simp only [Fintype.sum_bool]
    simp [nuBranch, copies, k, quarter, KrausFamily.applyMat, Matrix.mul_apply,
          Matrix.trace, conjTranspose]
    norm_num
    ring

private noncomputable def mu : FiniteInstrumentComp 2 Diamond where
  Outcome := Diamond
  branch := muBranch
  value := id
  trace_nonincreasing := fun ? _ => (mu_trace ?).le

private noncomputable def nu : FiniteInstrumentComp 2 Diamond where
  Outcome := Diamond
  branch := nuBranch
  value := id
  trace_nonincreasing := fun ? _ => (nu_trace ?).le

private theorem observed_top :
  KrausFamily.choi (nuBranch (true, true)) -
    KrausFamily.choi (muBranch (true, true)) =
  KrausFamily.choi (nuBranch (true, true)) := by
  simp [muBranch]

private theorem observed_a_top :
  (KrausFamily.choi (nuBranch (true, true)) +
    KrausFamily.choi (nuBranch (true, false))) -
  (KrausFamily.choi (muBranch (true, true)) +
    KrausFamily.choi (muBranch (true, false))) =
  KrausFamily.choi [k 2 2] := by
  ext <i, j> <i', j'>
  fin_cases i <;> fin_cases j <;> fin_cases i' <;> fin_cases j' <;>
  simp [muBranch, nuBranch, copies, k, quarter, KrausFamily.choi,
        KrausFamily.choiTerm] <;> ring

private theorem observed_c_top :
  (KrausFamily.choi (nuBranch (true, true)) +
    KrausFamily.choi (nuBranch (false, true))) -
  (KrausFamily.choi (muBranch (true, true)) +
    KrausFamily.choi (muBranch (false, true))) =
  KrausFamily.choi [k 2 0] := by
  ext <i, j> <i', j'>
  fin_cases i <;> fin_cases j <;> fin_cases i' <;> fin_cases j' <;>
  simp [muBranch, nuBranch, copies, k, quarter, KrausFamily.choi,
        KrausFamily.choiTerm] <;> ring

private theorem observed_nonbottom :
  (KrausFamily.choi (nuBranch (true, true)) +
    KrausFamily.choi (nuBranch (true, false)) +
    KrausFamily.choi (nuBranch (false, true))) -
  (KrausFamily.choi (muBranch (true, true)) +

```

```

      KrausFamily.choi (muBranch (true, false)) +
      KrausFamily.choi (muBranch (false, true))) =
      KrausFamily.choi [k 2 1] := by
ext <i, j> <i', j'>
fin_cases i <;> fin_cases j <;> fin_cases i' <;> fin_cases j' <;>
  simp [muBranch, nuBranch, copies, k, quarter, KrausFamily.choi,
    KrausFamily.choiTerm] <;> ring

private theorem observed_all :
  (? o : Diamond, KrausFamily.choi (muBranch o)) =
    ? o : Diamond, KrausFamily.choi (nuBranch o) := by
rw [Fintype.sum_prod_type, Fintype.sum_prod_type]
simp only [Fintype.sum_bool]
ext <i, j> <i', j'>
fin_cases i <;> fin_cases j <;> fin_cases i' <;> fin_cases j' <;>
  simp [muBranch, nuBranch, copies, k, quarter, KrausFamily.choi,
    KrausFamily.choiTerm] <;> ring

private theorem observation_refines :
  FiniteInstrumentComp.ObservationRefines mu nu := by
classical
intro U
rw [FiniteInstrumentComp.observationChoi_eq_testChoi,
  FiniteInstrumentComp.observationChoi_eq_testChoi]
unfold FiniteInstrumentComp.testChoi
simp only [mu, nu]
change
  (? o : Diamond, if o in (U : Set Diamond) then
    KrausFamily.choi (muBranch o) else 0) <=
    ? o : Diamond, if o in (U : Set Diamond) then
      KrausFamily.choi (nuBranch o) else 0
rw [Fintype.sum_prod_type, Fintype.sum_prod_type]
simp only [Fintype.sum_bool]
by_cases hb : (false, false) in (U : Set Diamond)
* have hall : forall d : Diamond, d in (U : Set Diamond) :=
  fun d => U.isScottOpen.1 (bot_le : (false, false) <= d) hb
simp [hall]
simpa [Fintype.sum_prod_type, Fintype.sum_bool] using observed_all.le
* by_cases ha : (true, false) in (U : Set Diamond)
* have ht : (true, true) in (U : Set Diamond) :=
  U.isScottOpen.1 (by simp) ha
by_cases hc : (false, true) in (U : Set Diamond)
* simp [hb, ha, hc, ht]
rw [Matrix.le_iff, observed_nonbottom]
exact KrausFamily.choi_posSemidef _
* simp [hb, ha, hc, ht]
rw [Matrix.le_iff, observed_a_top]
exact KrausFamily.choi_posSemidef _
* by_cases hc : (false, true) in (U : Set Diamond)
* have ht : (true, true) in (U : Set Diamond) :=
  U.isScottOpen.1 (by simp) hc
simp [hb, ha, hc, ht]
rw [Matrix.le_iff, observed_c_top]
exact KrausFamily.choi_posSemidef _
* by_cases ht : (true, true) in (U : Set Diamond)
* simp [hb, ha, hc, ht]
rw [Matrix.le_iff, observed_top]
exact KrausFamily.choi_posSemidef _
* simp [hb, ha, hc, ht]

private def postPred : Diamond -> KrausFamily 2 2
| (false, false) => []
| (true, false) => [1 1 0, 1 1 0]

```

```

| (false, true) => [1 1 1]
| (true, true) => [1 1 0, 1 1 0, 1 0 1, 1 0 1]

private theorem plus_residual (? : Matrix (Fin 2) (Fin 2) ?) :
  KrausFamily.applyMat (postPred (true, true)) ? =
    KrausFamily.applyMat (postPred (false, true) ++ [1 1 (-1)]) ? := by
ext i j
fin_cases i <;> fin_cases j <;>
simp [postPred, 1, KrausFamily.applyMat, Matrix.mul_apply, conjTranspose]

private theorem bottom_refines (d : Diamond) :
  KrausFamily.Refines (postPred (false, false)) (postPred d) := by
  refine <postPred d, fun ? => ?_>
  simp [postPred, KrausFamily.applyMat]

private theorem a_refines_top :
  KrausFamily.Refines (postPred (true, false)) (postPred (true, true)) := by
  refine <[1 0 1, 1 0 1], fun ? => ?_>
  rfl

private theorem c_refines_top :
  KrausFamily.Refines (postPred (false, true)) (postPred (true, true)) :=
  <[1 1 (-1)], plus_residual>

private noncomputable def post : FiniteInstrumentComp.KrausPost 2 Diamond where
  pred := postPred
  mono := by
    rintro <d_0, d_1> <e_0, e_1> h
    change d_0 <= e_0 /\ d_1 <= e_1 at h
    rcases h with <h_0, h_1>
    fin_cases d_0 <;> fin_cases d_1 <;> fin_cases e_0 <;> fin_cases e_1
    all_goals
      try
        have hfalse : not (true : Bool) <= false := by decide
        contradiction
    all_goals
      first
      | exact KrausFamily.residualRefines_refl _
      | exact bottom_refines _
      | exact a_refines_top
      | exact c_refines_top

private def witness : (Fin 2 x Fin 2) -> ?
| (0, 0) => -1
| (0, 1) => 2
| (1, 0) => 0
| (1, 1) => 1

private theorem choi_wp_eq_sum (? : FiniteInstrumentComp 2 Diamond)
  (P : Diamond -> KrausFamily 2 2) :
  KrausFamily.choi (? wpKraus P) =
    ? o : ?.Outcome,
    KrausFamily.choi (KrausFamily.comp (P (? .value o)) (? .branch o)) := by
classical
unfold FiniteInstrumentComp.wpKraus
rw [FiniteInstrumentComp.choi_flatMap]
rw [ <- List.sum_toFinset
  (fun o : ?.Outcome =>
    KrausFamily.choi (KrausFamily.comp (P (? .value o)) (? .branch o)))
  (Finset.nodup_toList Finset.univ)]
simp

private theorem witness_negative :

```

```

star witness ??
  ((KrausFamily.choi (nu.wpKraus post) -
    KrausFamily.choi (mu.wpKraus post)).mulVec witness) =
  (-1 / 16 : ?) := by
rw [choi_wp_eq_sum, choi_wp_eq_sum]
change
star witness ??
  (((? o : Diamond,
    KrausFamily.choi
      (KrausFamily.comp (postPred o) (nuBranch o))) -
    (? o : Diamond,
      KrausFamily.choi
        (KrausFamily.comp (postPred o) (muBranch o))))).mulVec witness) =
  (-1 / 16 : ?)
rw [Fintype.sum_prod_type, Fintype.sum_prod_type]
simp only [dotProduct, Matrix.mulVec]
simp_rw [Fintype.sum_prod_type]
simp only [Fintype.sum_bool, Fin.sum_univ_two]
simp [postPred, muBranch, nuBranch, copies, k, quarter, l, witness,
  KrausFamily.comp, KrausFamily.choi, KrausFamily.choiTerm,
  Matrix.mul_apply]
apply Complex.ext <;> norm_num

private theorem not_refines :
  not FiniteInstrumentComp.Refines mu nu := by
intro h
have hchoi :=
  KrausFamily.choiRefines_of_residualRefines (h post)
rw [KrausFamily.ChoiRefines, Matrix.le_iff] at hchoi
have hnonneg :=
  hchoi.dotProduct_mulVec_nonneg witness
rw [witness_negative] at hnonneg
rw [RCLike.nonneg_iff] at hnonneg
norm_num at hnonneg

/-- On a qubit and the four-element diamond, pointwise Choi refinement
of all Scott-open observations is strictly weaker than TT refinement. -/
theorem exists_observationRefines_not_refines :
  exists ? ? : FiniteInstrumentComp 2 (Bool x Bool),
    FiniteInstrumentComp.ObservationRefines ? ? /\
      not FiniteInstrumentComp.Refines ? ? :=
  <mu, nu, observation_refines, not_refines>

end QLambda.RefinementCounterexample

```

A.47 QLambda/RoundedTheory.lean

375 lines.

Lean 4 source

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/
import QLambda.ObservationBasis

/-!
# Saturated rounded theories

This file constructs the continuous lattice of rounded theories of

```

```

strict rational Choi/output tokens. The auxiliary basis relation first
allows semantic weakening and then requires a strict rational
strengthening. Consequently its rounded lower sets are saturated under
the full semantic entailment preorder, not merely syntactic inclusion.
-/

open Set

namespace QLambda

open Scott1972.ContinuousLattice

universe u v w

/-- An abstract interpolative basis. -/
structure AbstractBasis (a : Type u) where
  below : a -> a -> Prop
  trans : forall {a b c}, below a b -> below b c -> below a c
  interpolate : forall {a c}, below a c -> exists b, below a b /\ below b c

namespace RoundedTheory

variable {a : Type u} (B : AbstractBasis a)

/-- One-step rounded lower closure. -/
def round (s : Set a) : Set a :=
  {a | exists b in s, B.below a b}

theorem round_mono : Monotone (round B) := by
  intro s t hst a
  rintro <b, hb, hab>
  exact <b, hst hb, hab>

theorem round_idempotent (s : Set a) :
  round B (round B s) = round B s := by
  ext a
  constructor
  * rintro <b, <c, hc, hbc>, hab>
    exact <c, hc, B.trans hab hbc>
  * rintro <c, hc, hac>
    obtain <b, hab, hbc> := B.interpolate hac
    exact <b, <c, hc, hbc>, hab>

/-- A rounded theory is a fixed point of the basis rounding operator. -/
structure Carrier where
  carrier : Set a
  rounded : round B carrier = carrier

instance : SetLike (Carrier B) a where
  coe A := A.carrier
  coe_injective A C h := by
    cases A
    cases C
    simp only [Carrier.mk.injEq]
    exact h

@[ext]
theorem ext {A C : Carrier B} (h : (A : Set a) = C) : A = C :=
  SetLike.coe_injective h

instance : PartialOrder (Carrier B) :=
  PartialOrder.lift (fun A => (A : Set a)) SetLike.coe_injective

```

```

/-- The rounded principal generated by a basis element. -/
def principal (b : a) : Carrier B :=
  <round B {b}, round_idempotent B {b}>

@[simp]
theorem mem_principal {a b : a} :
  a in principal B b <-> B.below a b := by
  change a in round B {b} <-> B.below a b
  simp [round]

theorem principal_le {b : a} {A : Carrier B} (hb : b in A) :
  principal B b <= A := by
  intro a ha
  change a in A.carrier
  change a in round B {b} at ha
  have haround : a in round B A.carrier := by
    exact <b, hb, (by simp [round] using ha)>
  rw [A.rounded] at haround
  exact haround

/-- Rounded theories are closed under arbitrary unions. -/
def union (S : Set (Carrier B)) : Carrier B where
  carrier := {a | exists A in S, a in A}
  rounded := by
    ext a
    constructor
    * rintro <b, <A, hAS, hbA>, hab>
      refine <A, hAS, ?_>
      change a in A.carrier
      have ha : a in round B A.carrier := <b, hbA, hab>
      rw [A.rounded] at ha
      exact ha
    * rintro <A, hAS, haA>
      have ha : a in round B A.carrier := by
        rw [A.rounded]
        exact haA
      obtain <b, hbA, hab> := ha
      exact <b, <A, hAS, hbA>, hab>

instance : SupSet (Carrier B) :=
  <union B>

@[simp]
theorem mem_sSup {S : Set (Carrier B)} {a : a} :
  a in sSup S <-> exists A in S, a in A :=
  Iff.rfl

theorem isLUB_sSup (S : Set (Carrier B)) : IsLUB S (sSup S) := by
  constructor
  * intro A hAS a ha
    exact <A, hAS, ha>
  * intro C hC a
    rintro <A, hAS, ha>
    exact hC hAS ha

noncomputable instance : CompleteLattice (Carrier B) :=
  completeLatticeOfSup (Carrier B) (isLUB_sSup B)

/-- Membership of a basis element is Scott-open in the theory lattice. -/
theorem scottOpen_mem (b : a) :
  ScottOpen {A : Carrier B | b in A} := by
  constructor
  * intro A C hAC hbA

```

```

    exact hAC hbA
* intro S hS hdir hb
  change b in (sSup S : Carrier B) at hb
  change exists A in S, b in A at hb
  obtain <A, hAS, hbA> := hb
  exact <A, hAS, hbA>

/-- A rounded principal is way below every theory containing its
generator. -/
theorem principal_wayBelow {b : a} {A : Carrier B} (hb : b in A) :
  principal B b << A := by
  refine <{C : Carrier B | b in C}, scottOpen_mem B b, hb, ?_>
  intro C hbC
  exact principal_le B hbC

/-- Every rounded theory is the supremum of the rounded principals way
below it. -/
theorem isContinuousLattice : IsContinuousLattice (Carrier B) := by
  intro A
  constructor
* intro C hC
  exact hC.le
* intro C hC a ha
  have haround : a in round B A.carrier := by
    rw [A.rounded]
    exact ha
  obtain <b, hbA, hab> := haround
  have hp : principal B b << A := principal_wayBelow B hbA
  exact hC hp (show a in principal B b by rwa [mem_principal])

end RoundedTheory

namespace CodedAtom

variable {n : Nat} {v : Type v}

/-- Strict strengthening of a coded atom: the output code and rational
vector are unchanged while the threshold strictly increases. -/
def StronglyBelow (a b : CodedAtom n ?) : Prop :=
  a.1.1 = b.1.1 /\ a.2 = b.2 /\ a.1.2.1 < b.1.2.1

theorem stronglyBelow_trans {a b c : CodedAtom n ?}
  (hab : StronglyBelow a b) (hbc : StronglyBelow b c) :
  StronglyBelow a c :=
  <hab.1.trans hbc.1, hab.2.1.trans hbc.2.1,
  hab.2.2.trans hbc.2.2>

theorem stronglyBelow_interpolate {a c : CodedAtom n ?}
  (hac : StronglyBelow a c) :
  exists b, StronglyBelow a b /\ StronglyBelow b c := by
  let q : ? := (a.1.2.1 + c.1.2.1) / 2
  have hq0 : 0 <= q := by
    have ha0 := a.1.2.2
    have hc0 := c.1.2.2
    dsimp [q]
    linarith
  let b : CodedAtom n ? := ((a.1.1, <q, hq0>), a.2)
  refine <b, ?_, ?_>
* exact <rfl, rfl, by dsimp [b, q]; linarith [hac.2.2]>
* exact <hac.1, hac.2.1, by dsimp [b, q]; linarith [hac.2.2]>

theorem stronglyBelow_holds {D : Type u} [CompleteLattice D]
  (C : OutputCode ? D) {a b : CodedAtom n ?}

```



```

    (hab : StronglyBelow a b) {? : FiniteInstrumentComp n D}
    (hb : Holds C b ?) : Holds C a ? := by
  apply ObservationAtom.holds_of_threshold_lt
    (a := toObservation C a) (b := toObservation C b)
  * exact congrArg C.observe hab.2.1
  * exact hab.1
  * change (a.1.2.1 : ?) <= (b.1.2.1 : ?)
    exact_mod_cast hab.2.2.1e
  * exact hb

end CodedAtom

namespace CodedToken

variable {n : Nat} {? : Type v}

/-- Pointwise strict strengthening of every conjunct. -/
def StronglyBelow (t s : CodedToken n ?) : Prop :=
  forall a in t, exists b in s, CodedAtom.StronglyBelow a b

theorem stronglyBelow_trans {t s r : CodedToken n ?}
  (hts : StronglyBelow t s) (hsr : StronglyBelow s r) :
  StronglyBelow t r := by
  intro a ha
  obtain <b, hb, hab> := hts a ha
  obtain <c, hc, hbc> := hsr b hb
  exact <c, hc, CodedAtom.stronglyBelow_trans hab hbc>

theorem stronglyBelow_interpolate {t r : CodedToken n ?}
  (htr : StronglyBelow t r) :
  exists s, StronglyBelow t s /\ StronglyBelow s r := by
  induction t with
  | nil =>
    exact <[], by simp [StronglyBelow], by simp [StronglyBelow]>
  | cons a t ih =>
    obtain <c, hc, hac> := htr a (by simp)
    obtain <b, hab, hbc> := CodedAtom.stronglyBelow_interpolate hac
    have htr' : StronglyBelow t r := by
      intro x hx
      exact htr x (by simp [hx])
    obtain <s, hts, hsr> := ih htr'
    refine <b :: s, ?_, ?_>
    * intro x hx
      rcases List.mem_cons.mp hx with rfl | hx
      * exact <b, by simp, hab>
      * obtain <y, hy, hxy> := hts x hx
        exact <y, by simp [hy], hxy>
    * intro x hx
      rcases List.mem_cons.mp hx with rfl | hx
      * exact <c, hc, hbc>
      * exact hsr x hx

/-- Semantic entailment between coded tokens. -/
def Entails {D : Type u} [CompleteLattice D] (C : OutputCode ? D)
  (t s : CodedToken n ?) : Prop :=
  ObservationToken.Entails (toObservation C t) (toObservation C s)

theorem entails_refl {D : Type u} [CompleteLattice D]
  (C : OutputCode ? D) (t : CodedToken n ?) :
  Entails C t t :=
  fun _ h => h

theorem entails_trans {D : Type u} [CompleteLattice D]

```

```

    (C : OutputCode ? D) {t s r : CodedToken n ?}
    (hts : Entails C t s) (hsr : Entails C s r) :
    Entails C t r :=
    fun ? hr => hts ? (hsr ? hr)

theorem stronglyBelow_entails {D : Type u} [CompleteLattice D]
  (C : OutputCode ? D) {t s : CodedToken n ?}
  (hts : StronglyBelow t s) : Entails C t s := by
  intro ? hs a ha
  obtain <x, hx, rfl> := List.mem_map.mp ha
  obtain <y, hy, hxy> := hts x hx
  apply CodedAtom.stronglyBelow_holds C hxy
  exact hs _ (List.mem_map.mpr <y, hy, rfl>)

/-- The saturated auxiliary relation: semantic weakening followed by a
strict rational strengthening. -/
def RoundedBelow {D : Type u} [CompleteLattice D] (C : OutputCode ? D)
  (t s : CodedToken n ?) : Prop :=
  exists u, Entails C t u /\ StronglyBelow u s

theorem roundedBelow_entails {D : Type u} [CompleteLattice D]
  (C : OutputCode ? D) {t s : CodedToken n ?}
  (hts : RoundedBelow C t s) : Entails C t s := by
  obtain <u, ht, hus> := hts
  exact entails_trans C ht (stronglyBelow_entails C hus)

theorem roundedBelow_trans {D : Type u} [CompleteLattice D]
  (C : OutputCode ? D) {t s r : CodedToken n ?}
  (hts : RoundedBelow C t s) (hsr : RoundedBelow C s r) :
  RoundedBelow C t r := by
  obtain <v, hsv, hvr> := hsr
  exact <v, entails_trans C (roundedBelow_entails C hts) hsv, hvr>

theorem roundedBelow_interpolate {D : Type u} [CompleteLattice D]
  (C : OutputCode ? D) {t r : CodedToken n ?}
  (htr : RoundedBelow C t r) :
  exists s, RoundedBelow C t s /\ RoundedBelow C s r := by
  obtain <u, ht, hr> := htr
  obtain <s, hs, hsr> := stronglyBelow_interpolate hr
  refine <s, <u, ht, hus>, ?_>
  exact <s, entails_refl C s, hsr>

/-- The interpolative basis of coded tokens for a chosen output code. -/
def roundedBasis {D : Type u} [CompleteLattice D]
  (C : OutputCode ? D) : AbstractBasis (CodedToken n ?) where
  below := RoundedBelow C
  trans := roundedBelow_trans C
  interpolate := roundedBelow_interpolate C

end CodedToken

/-- The saturated rounded-theory completion of strict rational
Choi/output tokens. -/
abbrev TokenTheory (n : Nat) {v : Type v} {D : Type u} [CompleteLattice D]
  (C : OutputCode ? D) :=
  RoundedTheory.Carrier (CodedToken.roundedBasis (n := n) C)

/-- The token-theory completion is a continuous lattice. -/
theorem tokenTheory_isContinuousLattice
  (n : Nat) {v : Type v} {D : Type u} [CompleteLattice D]
  (C : OutputCode ? D) :
  IsContinuousLattice (TokenTheory n C) :=
  RoundedTheory.isContinuousLattice (CodedToken.roundedBasis (n := n) C)

```

```

/-- Membership in a token theory is saturated under the full semantic
entailment preorder. -/
theorem TokenTheory.entailment_saturated
  {n : Nat} {v : Type v} {D : Type u} [CompleteLattice D]
  {C : OutputCode ? D} {A : TokenTheory n C}
  {t s : CodedToken n ?} (hts : CodedToken.Entails C t s)
  (hs : s in A) : t in A := by
  have hround : s in
    RoundedTheory.round (CodedToken.roundedBasis (n := n) C) A.carrier := by
    rw [A.rounded]
    exact hs
  obtain <r, hrA, hsr> := hround
  obtain <u, hsu, hur> := hsr
  have htr : CodedToken.RoundedBelow C t r :=
    <u, CodedToken.entails_trans C hts hsu, hur>
  have ht : t in
    RoundedTheory.round (CodedToken.roundedBasis (n := n) C) A.carrier :=
    <r, hrA, htr>
  change t in A.carrier
  rw [A.rounded]
  exact ht

/-- Every assertion in a token theory has a strictly rounded semantic
strengthening in the same theory. -/
theorem TokenTheory.exists_rounding
  {n : Nat} {v : Type v} {D : Type u} [CompleteLattice D]
  {C : OutputCode ? D} (A : TokenTheory n C)
  {t : CodedToken n ?} (ht : t in A) :
  exists s in A, CodedToken.RoundedBelow C t s := by
  have : t in RoundedTheory.round (CodedToken.roundedBasis (n := n) C)
    A.carrier := by
    rw [A.rounded]
    exact ht
  exact this

/-- The canonical token completion obtained from the countable output
basis of an `?QVA`. -/
noncomputable abbrev OmegaTokenTheory
  (n : Nat) (D : Type u) [CompleteLattice D] [IsOmegaQVA D] :=
  TokenTheory n (CountableOutputBasis.ofOmegaQVAFiniteUnion (D := D)).code

theorem omegaTokenTheory_isContinuousLattice
  (n : Nat) (D : Type u) [CompleteLattice D] [IsOmegaQVA D] :
  IsContinuousLattice (OmegaTokenTheory n D) :=
  tokenTheory_isContinuousLattice n
  (CountableOutputBasis.ofOmegaQVAFiniteUnion (D := D)).code

end QLambda

```

A.48 QLambda/RoundedTheoryMorphisms.lean

196 lines.

Lean 4 source

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/
import QLambda.RoundedTheory

```

```

/-!
# Morphisms of rounded-theory completions

A function from source basis elements to rounded target theories extends
canonically by taking the union of its values over all generators present in
the source theory. This construction preserves arbitrary suprema, hence is
Scott-continuous. No compatibility between the two basis relations is
needed: roundedness is supplied by the target values themselves.
-/

open Set

namespace QLambda

open Scott1972.ContinuousLattice

universe u v w

namespace RoundedTheory

variable {a : Type u} {b : Type v} {? : Type w}
variable (B : AbstractBasis a) (C : AbstractBasis b) (K : AbstractBasis ?)

/-- Extend rounded target data given on source basis elements. -/
noncomputable def extend (phi : a -> Carrier C) (A : Carrier B) : Carrier C :=
  sSup (phi '' A.carrier)

theorem mem_extend {phi : a -> Carrier C} {A : Carrier B} {b : b} :
  b in extend B C phi A <-> exists a in A, b in phi a := by
  rw [extend, mem_sSup]
  constructor
  * rintro <T, <a, ha, rfl>, hb>
    exact <a, ha, hb>
  * rintro <a, ha, hb>
    exact <phi a, <a, ha, rfl>, hb>

theorem extend_mono (phi : a -> Carrier C) :
  Monotone (extend B C phi) := by
  intro A A' hAA' b
  change b in extend B C phi A -> b in extend B C phi A'
  rw [mem_extend, mem_extend]
  rintro <a, ha, hb>
  exact <a, hAA' ha, hb>

/-- Rounded extension preserves every supremum, not only directed ones. -/
theorem extend_sSup (phi : a -> Carrier C) (S : Set (Carrier B)) :
  extend B C phi (sSup S) = sSup (extend B C phi '' S) := by
  apply ext
  ext b
  change b in extend B C phi (sSup S) <->
  b in (sSup (extend B C phi '' S) : Carrier C)
  rw [mem_extend, mem_sSup]
  constructor
  * rintro <a, ha, hb>
    obtain <A, hAS, haA> := (mem_sSup (B := B)).mp ha
    exact <extend B C phi A, <A, hAS, rfl>,
      (mem_extend (B := B) (C := C)).2 <a, haA, hb>>
  * rintro <_, <A, hAS, rfl>, hb>
    obtain <a, haA, hba> :=
      (mem_extend (B := B) (C := C)).mp hb
    exact <a, (mem_sSup (B := B)).2 <A, hAS, haA>, hba>

```

```

/-- The Scott map induced by rounded data on basis elements. -/
noncomputable def extendScott (phi : a -> Carrier C) :
  ScottMap (Carrier B) (Carrier C) :=
  <extend B C phi, continuous_of_preservesDirectedSup fun S _ =>
    extend_sSup B C phi S>

@[simp]
theorem extendScott_apply (phi : a -> Carrier C) (A : Carrier B) :
  extendScott B C phi A = extend B C phi A :=
  rfl

theorem extendScott_sSup (phi : a -> Carrier C) (S : Set (Carrier B)) :
  extendScott B C phi (sSup S) = sSup (extendScott B C phi '' S) :=
  extend_sSup B C phi S

/-- Value on a rounded principal, expressed solely in terms of basis data. -/
theorem extend_principal (phi : a -> Carrier C) (a : a) :
  extend B C phi (principal B a) =
    sSup (phi '' {x | B.below x a}) := by
  apply ext
  ext b
  change b in extend B C phi (principal B a) <->
    b in (sSup (phi '' {x | B.below x a}) : Carrier C)
  rw [mem_extend, mem_sSup]
  constructor
  * rintro <x, hx, hb>
    exact <phi x, <x, (mem_principal (B := B)).mp hx, rfl>, hb>
  * rintro <_, <x, hx, rfl>, hb>
    exact <x, (mem_principal (B := B)).2 hx, hb>

/-- Every rounded theory is the union of its rounded principals. -/
theorem sSup_principals_mem (A : Carrier B) :
  sSup (principal B '' A.carrier) = A := by
  apply ext
  ext a
  change a in (sSup (principal B '' A.carrier) : Carrier B) <-> a in A
  rw [mem_sSup]
  constructor
  * rintro <_, <b, hbA, rfl>, hab>
    exact principal_le B hbA hab
  * intro haA
    have haround : a in round B A.carrier := by
      rw [A.rounded]
      exact haA
    obtain <b, hbA, hab> := haround
    exact <principal B b, <b, hbA, rfl>,
      (mem_principal (B := B)).2 hab>

/-- Principal data gives the identity rounded extension. -/
@[simp]
theorem extend_principal_id (A : Carrier B) :
  extend B B (principal B) A = A :=
  sSup_principals_mem B A

@[simp]
theorem extendScott_principal_id :
  extendScott B B (principal B) =
    (ScottMap.idMap : ScottMap (Carrier B) (Carrier B)) := by
  apply ScottMap.ext
  intro A
  exact extend_principal_id B A

/-- Extending twice is extension by the Kleisli-composite basis data. -/

```

```

theorem extend_comp (phi : a -> Carrier C) (psi : b -> Carrier K)
  (A : Carrier B) :
  extend C K psi (extend B C phi A) =
    extend B K (fun a => extend C K psi (phi a)) A := by
  apply ext
  ext c
  constructor
  * intro hc
    obtain <b, hb, hcb> :=
      (mem_extend (B := C) (C := K)).mp hc
    obtain <a, ha, hba> :=
      (mem_extend (B := B) (C := C)).mp hb
    exact (mem_extend (B := B) (C := K)).2
      <a, ha, (mem_extend (B := C) (C := K)).2 <b, hba, hcb>>
  * intro hc
    obtain <a, ha, hca> :=
      (mem_extend (B := B) (C := K)).mp hc
    obtain <b, hba, hcb> :=
      (mem_extend (B := C) (C := K)).mp hca
    exact (mem_extend (B := C) (C := K)).2
      <b, (mem_extend (B := B) (C := C)).2 <a, ha, hba>, hcb>

theorem extendScott_comp (phi : a -> Carrier C) (psi : b -> Carrier K) :
  (extendScott C K psi).comp (extendScott B C phi) =
    extendScott B K (fun a => extend C K psi (phi a)) := by
  apply ScottMap.ext
  intro A
  exact extend_comp B C K phi psi A

/-- Relation-valued basis data, rounded in the target basis. -/
noncomputable def principalData (R : a -> b -> Prop) (a : a) : Carrier C :=
  sSup (principal C '' {b | R a b})

theorem mem_principalData {R : a -> b -> Prop} {a : a} {b : b} :
  b in principalData C R a <->
    exists c, R a c /\ C.below b c := by
  rw [principalData, mem_sSup]
  constructor
  * rintro <_, <c, hc, rfl>, hbc>
    exact <c, hc, (mem_principal (B := C)).mp hbc>
  * rintro <c, hc, hbc>
    exact <principal C c, <c, hc, rfl>,
      (mem_principal (B := C)).2 hbc>

/-- Rounded extension generated by a derivation relation on basis tokens. -/
noncomputable def extendRelation (R : a -> b -> Prop) :
  ScottMap (Carrier B) (Carrier C) :=
  extendScott B C (principalData C R)

theorem mem_extendRelation {R : a -> b -> Prop}
  {A : Carrier B} {b : b} :
  b in extendRelation B C R A <->
    exists a in A, exists c, R a c /\ C.below b c := by
  rw [extendRelation, extendScott_apply, mem_extend]
  constructor
  * rintro <a, ha, hb>
    obtain <c, hc, hbc> := (mem_principalData (C := C)).mp hb
    exact <a, ha, c, hc, hbc>
  * rintro <a, ha, c, hc, hbc>
    exact <a, ha, (mem_principalData (C := C)).2 <c, hc, hbc>>

end RoundedTheory

```

```
end QLambda
```

A.49 QLambda/RoundedTheoryOmega.lean

289 lines.

Lean 4 source

```
/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/
import QLambda.RoundedTheory
import QLambda.QuantumPower

/-!
# Countably based rounded theories are in `?QVA`

For an encodable abstract basis, finite joins of single-membership gates
give a sequence of quantum-factorable, finitely separated approximants.
-/

open Set
open scoped MatrixOrder ComplexOrder

namespace QLambda

open Scott1972.ContinuousLattice

universe u v

namespace RoundedTheory

variable {a : Type u} (B : AbstractBasis a)

/-- A nonzero one-dimensional sub-normalized density, used as a Boolean marker. -/
def booleanMarker : SubNormalizedDensity 1 where
  mat := 1
  posSemidef := Matrix.PosSemidef.one
  trace_le_one := by simp [Matrix.trace]

theorem booleanMarker_ne_bot :
  booleanMarker != (False : SubNormalizedDensity 1) := by
  intro h
  have hm := congrArg SubNormalizedDensity.mat h
  have h00 := congrFun (congrFun hm (0 : Fin 1)) (0 : Fin 1)
  simp [booleanMarker, SubNormalizedDensity.mat_bot] at h00

theorem booleanMarker_not_le_bot :
  not booleanMarker <= (False : SubNormalizedDensity 1) := by
  intro h
  exact booleanMarker_ne_bot (le_antisymm h bot_le)

/-- The gate for `b` returns its rounded principal exactly when `b` belongs
to the input theory. -/
noncomputable def membershipGate (b : a) : ScottMap (Carrier B) (Carrier B) :=
  by
    classical
    exact
      <fun A => if b in A then principal B b else False,
      continuous_of_preservesDirectedSup <| by
```

```

intro S hS hdir
by_cases hb : b in (sSup S : Carrier B)
* obtain <A, hAS, hbA> := (mem_sSup (B := B)).mp hb
change (if b in (sSup S : Carrier B) then principal B b else False) =
  sSup ((fun A : Carrier B =>
    if b in A then principal B b else False) '' S)
rw [if_pos hb]
apply le_antisymm
* have hmem :
  principal B b in
    (fun A : Carrier B => if b in A then principal B b else False) '' S :=
    <A, hAS, by simp [hbA]>
exact le_sSup hmem
* refine sSup_le ?_
rintro C <A, hAS, rfl>
by_cases hbA' : b in A
* simp [hbA']
* simp [hbA']
* change (if b in (sSup S : Carrier B) then principal B b else False) =
  sSup ((fun A : Carrier B =>
    if b in A then principal B b else False) '' S)
rw [if_neg hb]
apply le_antisymm bot_le
refine sSup_le ?_
rintro C <A, hAS, rfl>
have hbA : b notin A := by
  intro h
  apply hb
  exact (mem_sSup (B := B)).mpr <A, hAS, h>
simp [hbA]>

theorem membershipGate_apply_of_mem {b : a} {A : Carrier B} (hb : b in A) :
  membershipGate B b A = principal B b := by
  classical
  simp [membershipGate, hb]

theorem membershipGate_apply_of_not_mem {b : a} {A : Carrier B} (hb : b notin A) :
  membershipGate B b A = False := by
  classical
  simp [membershipGate, hb]

theorem membershipGate_le_id (b : a) (A : Carrier B) :
  membershipGate B b A <= A := by
  by_cases hb : b in A
  * rw [membershipGate_apply_of_mem B hb]
  exact principal_le B hb
  * rw [membershipGate_apply_of_not_mem B hb]
  exact bot_le

/-- A single membership gate factors through one one-dimensional density
block, with `booleanMarker` representing true and `False` false. -/
noncomputable def membershipGate_factorable (b : a) :
  QFactorable (membershipGate B b) := by
  classical
  exact
  { dims := [1]
    enc := fun A => (if b in A then booleanMarker else False, <>)
    recon := fun v => if booleanMarker <= v.1 then principal B b else False
    enc_mono := by
      intro A C hAC
      by_cases hbA : b in A
      * have hbC : b in C := hAC hbA
      simp only [hbA, hbC, reduceIte]
  }

```



```

    exact <le_rfl, le_rfl>
  * by_cases hbC : b in C
  * simp only [hbA, hbC, reduceIte]
    exact <bot_le, le_rfl>
  * simp only [hbA, hbC, reduceIte]
    exact <le_rfl, le_rfl>
recon_mono := by
  intro v w hvw
  by_cases hv : booleanMarker <= v.1
  * have hw : booleanMarker <= w.1 := hv.trans hvw.1
    simp [hv, hw]
  * by_cases hw : booleanMarker <= w.1
    * simp [hv, hw]
    * simp [hv, hw]
factor := fun A => by
  by_cases hb : b in A
  * rw [membershipGate_apply_of_mem B hb]
    change principal B b =
      if booleanMarker <= (if b in A then booleanMarker else False)
      then principal B b else False
    rw [if_pos hb, if_pos le_rfl]
  * rw [membershipGate_apply_of_not_mem B hb]
    change (False : Carrier B) =
      if booleanMarker <= (if b in A then booleanMarker else False)
      then principal B b else False
    rw [if_neg hb, if_neg booleanMarker_not_le_bot] }

theorem membershipGate_separated (b : a) :
  FinitelySeparated (membershipGate B b) := by
  classical
  refine <{False, principal B b}, {fun A => ?_}>
  by_cases hb : b in A
  * refine <principal B b, by simp, ?_, principal_le B hb>
    rw [membershipGate_apply_of_mem B hb]
  * refine <False, by simp, ?_, bot_le>
    rw [membershipGate_apply_of_not_mem B hb]

section Encodable

variable [Encodable a]

/-- The gate selected by the `n`-th decoded basis element. Missing decoder
entries contribute the bottom map. -/
noncomputable def decodedGate (n : Nat) : ScottMap (Carrier B) (Carrier B) :=
  match Encodable.decode (a := a) n with
  | some b => membershipGate B b
  | none => False

noncomputable def decodedGate_factorable (n : Nat) :
  QFactorable (decodedGate B n) := by
  unfold decodedGate
  split
  * exact membershipGate_factorable B _
  * exact FunctionSpaceOmega.QFactorable.bot

theorem decodedGate_separated (n : Nat) :
  FinitelySeparated (decodedGate B n) := by
  unfold decodedGate
  split
  * exact membershipGate_separated B _
  * exact FunctionSpaceOmega.finitelySeparated_bot (X := Carrier B)

theorem decodedGate_le_id (n : Nat) (A : Carrier B) :

```

```

    decodedGate B n A <= A := by
  unfold decodedGate
  split
  * exact membershipGate_le_id B _ A
  * rw [ScottMap.bot_apply]
    exact bot_le

/-- The finite prefix join of decoded membership gates. -/
noncomputable def prefixApprox : Nat -> ScottMap (Carrier B) (Carrier B)
| 0 => False
| n + 1 => prefixApprox n sqsup decodedGate B n

noncomputable def prefixApprox_factorable (n : Nat) :
  QFactorable (prefixApprox B n) := by
  induction n with
  | zero => exact FunctionSpaceOmega.QFactorable.bot
  | succ n ih =>
    rw [prefixApprox]
    exact FunctionSpaceOmega.QFactorable.sup ih (decodedGate_factorable B n)

theorem prefixApprox_separated (n : Nat) :
  FinitelySeparated (prefixApprox B n) := by
  induction n with
  | zero =>
    exact FunctionSpaceOmega.finitelySeparated_bot (X := Carrier B)
  | succ n ih =>
    rw [prefixApprox]
    exact FunctionSpaceOmega.finitelySeparated_sup ih
      (decodedGate_separated B n)

theorem prefixApprox_le_id (n : Nat) (A : Carrier B) :
  prefixApprox B n A <= A := by
  induction n with
  | zero =>
    change (False : ScottMap (Carrier B) (Carrier B)) A <= A
    rw [ScottMap.bot_apply]
    exact bot_le
  | succ n ih =>
    rw [prefixApprox, ScottMap.sup_apply]
    exact sup_le ih (decodedGate_le_id B n A)

theorem prefixApprox_mono : Monotone (prefixApprox B) := by
  intro i j hij
  obtain <k, rfl> := Nat.exists_eq_add_of_le hij
  clear hij
  induction k with
  | zero => simp
  | succ k ih =>
    rw [Nat.add_succ, prefixApprox]
    exact ih.trans le_sup_left

theorem iSup_prefixApprox :
  (bigcup n, prefixApprox B n) = (ScottMap.idMap : ScottMap (Carrier B) (Carrier B)) := by
  apply ScottMap.ext
  intro A
  rw [scottMap_iSup_apply, ScottMap.idMap_apply]
  apply le_antisymm
  * exact iSup_le fun n => prefixApprox_le_id B n A
  * intro a ha
    have haRound : a in round B A.carrier := by
      rw [A.rounded]
      exact ha
    obtain <b, hbA, hab> := haRound

```

```

let k := Encodable.encode b
have hdecode : Encodable.decode (a := a) k = some b :=
  Encodable.encodek b
have haGate : a in decodedGate B k A := by
  rw [decodedGate, hdecode, membershipGate_apply_of_mem B hbA,
    mem_principal]
  exact hab
have hle : decodedGate B k <= prefixApprox B (k + 1) := by
  rw [prefixApprox]
  exact le_sup_right
exact le_iSup (fun n => (prefixApprox B n : Carrier B -> Carrier B) A) (k + 1)
(hle A haGate)

/-- Rounded theories over an encodable abstract basis form an `?QVA`. -/
@[instance_reducible] noncomputable def isOmegaQVA : IsOmegaQVA (Carrier B) where
  isContinuousLattice := isContinuousLattice B
  approx := prefixApprox B
  qfactorable := prefixApprox_factorable B
  separated := prefixApprox_separated B
  monotone_approx := prefixApprox_mono B
  iSup_approx := iSup_prefixApprox B

end Encodable

end RoundedTheory

/-- Token theories over an encodable output index form an `?QVA`. -/
@[instance_reducible] noncomputable def tokenTheory_isOmegaQVA
  (n : Nat) {? : Type v} [Encodable ?]
  {D : Type u} [CompleteLattice D] (C : OutputCode ? D) :
  IsOmegaQVA (TokenTheory n C) :=
  RoundedTheory.isOmegaQVA (CodedToken.roundedBasis (n := n) C)

noncomputable instance TokenTheory.instIsOmegaQVA
  (n : Nat) {? : Type v} [Encodable ?]
  {D : Type u} [CompleteLattice D] (C : OutputCode ? D) :
  IsOmegaQVA (TokenTheory n C) :=
  tokenTheory_isOmegaQVA n C

/-- The canonical token theory of an `?QVA` is itself an `?QVA`. -/
@[instance_reducible] noncomputable def omegaTokenTheory_isOmegaQVA
  (n : Nat) (D : Type u) [CompleteLattice D] [IsOmegaQVA D] :
  IsOmegaQVA (OmegaTokenTheory n D) :=
  inferInstance

end QLambda

```

A.50 QLambda/Saturation.lean

222 lines.

Lean 4 source

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/
import Scott1972.ContinuousLattice.FunctionSpaces
import Scott1972.ContinuousLattice.WayBelow

/-!

```

```

# Finite separation and 2-level saturation flattening

Mechanization of Chen-Kou-Lyu (arXiv:2608.03073) Lemmas 6.8 and 6.9
in the `Scott1972` continuous-lattice setting. The mathematics is
Chen-Kou-Lyu arXiv:2608.03073 (v1 Lemmas 6.5-6.7); see
`sources/Finite-valuation-approximable-structures-a-solution-to-the-Jung--Tix-problem-of-
probabilistic-powerdomains.md`.
-/

namespace Scott1972.ContinuousLattice

variable {D : Type*} [CompleteLattice D]

/-- Jung / CKL finite separator: `f` is finitely separated from `id` if a
finite set `M` interpolates `f(x) <= m <= x` at every `x`. -/
def FinitelySeparated (f : ScottMap D D) : Prop :=
  exists M : Finset D, forall x, exists m in M, (f : D -> D) x <= m /\ m <= x

theorem finitelySeparated_le_id {f : ScottMap D D} (hf : FinitelySeparated f) (x : D) :
  (f : D -> D) x <= x := by
  obtain <_, hM> := hf
  obtain <m, _, hfxm, hmx> := hM x
  exact hfxm.trans hmx

theorem finitelySeparated_comp_self {f : ScottMap D D} (hf : FinitelySeparated f) :
  FinitelySeparated (f.comp f) := by
  obtain <M, hM> := hf
  refine <M, fun x => ?_>
  obtain <m, hmM, hfx, hmx> := hM x
  obtain <m', _, hfm, hm'm> := hmM m
  exact <m, hmM, ((f.monotone hfx).trans hfm).trans hm'm, hmx>

theorem scottMap_iSup_apply {? : Type*} (f : ? -> ScottMap D D) (x : D) :
  ((bigcup i, f i) : ScottMap D D) x = bigcup i, (f i : D -> D) x := by
  rw [show (bigcup i, f i) = sSup (Set.range f) from sSup_range.symm,
    ScottMap.sSup_apply, <- Set.range_comp]
  rfl

theorem iSup_apply_eq_sSup_range {? : Type*} (f : ? -> D) :
  (bigcup i, f i) = sSup (Set.range f) :=
  sSup_range.symm

theorem finsetSup_wayBelow (M : Finset D) (x : D) (h : forall m in M, m << x) :
  M.sup id << x := by
  classical
  induction M using Finset.induction_on with
  | empty =>
    simpa using bot_wayBelow x
  | insert a S ha ih =>
    rw [Finset.sup_insert]
    exact (h a (Finset.mem_insert_self a S)).sup
      (ih fun m hm => h m (Finset.mem_insert_of_mem hm))

/-- **Chen-Kou-Lyu Lemma 6.8.** A finitely separated Scott map satisfies `f x << x`. -/
theorem finitelySeparated_wayBelow (hD : IsContinuousLattice D) {f : ScottMap D D}
  (hf : FinitelySeparated f) (x : D) : (f : D -> D) x << x := by
  classical
  obtain <M, hM> := hf
  have hx : x = sSup {y | y << x} := (hD.sSup_wayBelow x).symm
  have hne : {y | y << x}.Nonempty := <False, bot_wayBelow x>
  have hfsup : (f : D -> D) x = sSup ((f : D -> D) '' {y | y << x}) := by
    conv_lhs => rw [hx]
  exact f.preservesDirectedSup_coe _ hne (directedOn_wayBelow x)

```

```

set N : Finset D := M.filter (fun m => m << x)
have hle : (f : D -> D) x <= N.sup id := by
  rw [hfsup]
  refine sSup_le ?_
  rintro _ <y, hyx, rfl>
  obtain <m, hmM, hfym, hmy> := hM y
  exact hfym.trans (Finset.le_sup (f := id)
    (Finset.mem_filter.mpr <hmM, WayBelow.le_trans hmy hyx>))
exact WayBelow.le_trans hle
(finsetSup_wayBelow N x fun m hm => (Finset.mem_filter.mp hm).2)

/-- Jointly monotone hull of a double sequence. -/
noncomputable def monotoneHull (h : Nat -> Nat -> ScottMap D D) (i j : Nat) : ScottMap D D
:=
  bigcup (i' : Fin (i + 1)), bigcup (j' : Fin (j + 1)), h i'.val j'.val

theorem monotoneHull_ge (h : Nat -> Nat -> ScottMap D D) {i j i' j' : Nat}
  (hi : i' <= i) (hj : j' <= j) : h i' j' <= monotoneHull h i j := by
  have hi' : i' < i + 1 := Nat.lt_succ_of_le hi
  have hj' : j' < j + 1 := Nat.lt_succ_of_le hj
  calc
    h i' j' <= bigcup b : Fin (j + 1), h i' b.val :=
      le_iSup (fun b : Fin (j + 1) => h i' b.val) <j', hj'>
    _ <= monotoneHull h i j :=
      le_iSup (fun a : Fin (i + 1) => bigcup b : Fin (j + 1), h a.val b.val) <i', hi'>

theorem monotoneHull_le_of_le (h : Nat -> Nat -> ScottMap D D) {i i' j j' : Nat}
  (hi : i <= i') (hj : j <= j') : monotoneHull h i j <= monotoneHull h i' j' := by
  rw [ScottMap.le_def]
  intro x
  rw [monotoneHull, scottMap_iSup_apply]
  refine iSup_le fun a => ?_
  rw [scottMap_iSup_apply]
  refine iSup_le fun b => ?_
  exact monotoneHull_ge h
    ((Nat.lt_succ_iff.mp a.isLt).trans hi)
    ((Nat.lt_succ_iff.mp b.isLt).trans hj) x

theorem monotoneHull_le_id (h : Nat -> Nat -> ScottMap D D)
  (hh_sep : forall i j, FinitelySeparated (h i j)) (i j : Nat) :
  monotoneHull h i j <= ScottMap.idMap := by
  rw [ScottMap.le_def]
  intro x
  rw [monotoneHull, scottMap_iSup_apply]
  refine iSup_le fun i' => ?_
  rw [scottMap_iSup_apply]
  refine iSup_le fun j' => ?_
  simpa [ScottMap.idMap_apply] using finitelySeparated_le_id (hh_sep i'.val j'.val) x

/-- **Chen-Kou-Lyu Lemma 6.9, diagonal form.**

Given `sqsup a_n = id` and inner approximate identities `sqsup _j h i j = a i`
(increasing and finitely separated in `j`), the jointly monotone hull
produces `c n = (h n n)` with `sqsup c n = id`. -/
theorem saturation_flattening (hD : IsContinuousLattice D)
  (a : Nat -> ScottMap D D) (ha_mono : Monotone a)
  (ha_id : (bigcup n, a n) = ScottMap.idMap)
  (h : Nat -> Nat -> ScottMap D D)
  (hh_mono : forall i, Monotone (h i))
  (hh_sup : forall i, (bigcup j, h i j) = a i)
  (hh_sep : forall i j, FinitelySeparated (h i j)) :
  exists idx : Nat -> Nat,
    let c := fun n =>

```

```

    (monotoneHull h (idx n) (idx n)).comp (monotoneHull h (idx n) (idx n))
  Monotone c /\ (bigcup n, c n) = ScottMap.idMap := by
refine <id, ?_>
set H : Nat -> ScottMap D D := fun n => monotoneHull h n n
set c : Nat -> ScottMap D D := fun n => (H n).comp (H n)
have hH_mono : Monotone H := fun _ _ hnm => monotoneHull_le_of_le h hnm hnm
have hc_mono : Monotone c := by
  intro n m hnm
  rw [ScottMap.le_def]
  intro x
  exact (hH_mono hnm ((H n : D -> D) x)).trans
    ((H m).monotone (hH_mono hnm x))
refine <hc_mono, ?_>
apply ScottMap.ext
intro x
rw [scottMap_iSup_apply, ScottMap.idMap_apply]
refine le_antisymm ?_ ?_
* refine iSup_le fun n =>
  (monotoneHull_le_id h hh_sep n n ((H n : D -> D) x)).trans
  (by simpa [ScottMap.idMap_apply] using monotoneHull_le_id h hh_sep n n x)
* have hgoal : sSup {y | y <= x} <= bigcup n, (c n : D -> D) x := by
  refine sSup_le fun y hyx => ?_
  obtain <r, hyr, hrh> := wayBelow_interpolate hD hyx
  obtain <s, hrs, hrx> := wayBelow_interpolate hD hrh
  obtain <t, hst, htx> := wayBelow_interpolate hD hrx
  have hxA : x = bigcup n, (a n : D -> D) x := by
    simpa [scottMap_iSup_apply, ScottMap.idMap_apply] using
      (congrArg (fun f : ScottMap D D => (f : D -> D) x) ha_id).symm
  have hsA : s = bigcup n, (a n : D -> D) s := by
    simpa [scottMap_iSup_apply, ScottMap.idMap_apply] using
      (congrArg (fun f : ScottMap D D => (f : D -> D) s) ha_id).symm
  have hdirx : DirectedOn (* <= *) (Set.range fun n => (a n : D -> D) x) :=
    directedOn_range.2 fun p q =>
      <max p q, ha_mono (le_max_left p q) x, ha_mono (le_max_right p q) x>
  have hdirs : DirectedOn (* <= *) (Set.range fun n => (a n : D -> D) s) :=
    directedOn_range.2 fun p q =>
      <max p q, ha_mono (le_max_left p q) s, ha_mono (le_max_right p q) s>
  obtain <i, hi> : exists i, t <= (a i : D -> D) x := by
    have hsup : sSup (Set.range fun n => (a n : D -> D) x) = x := by
      rw [sSup_range, <- hxA]
    obtain <_, <i, rfl>, hit> :=
      (wayBelow_sSup_iff (Set.range_nonempty _) hdirx).1 (by rwa [hsup])
    exact <i, hit.le>
  obtain <i', hi'> : exists i', r <= (a i' : D -> D) s := by
    have hsup : sSup (Set.range fun n => (a n : D -> D) s) = s := by
      rw [sSup_range, <- hsA]
    obtain <_, <i', rfl>, hir> :=
      (wayBelow_sSup_iff (Set.range_nonempty _) hdirs).1 (by rwa [hsup])
    exact <i', hir.le>
  let k := max i i'
  have hk_1 : t <= (a k : D -> D) x := hi.trans (ha_mono (le_max_left i i') x)
  have hk_2 : r <= (a k : D -> D) s := hi'.trans (ha_mono (le_max_right i i') s)
  have hakx : (a k : D -> D) x = bigcup j, (h k j : D -> D) x := by
    simpa [scottMap_iSup_apply] using
      (congrArg (fun f : ScottMap D D => (f : D -> D) x) (hh_sup k)).symm
  have haks : (a k : D -> D) s = bigcup j, (h k j : D -> D) s := by
    simpa [scottMap_iSup_apply] using
      (congrArg (fun f : ScottMap D D => (f : D -> D) s) (hh_sup k)).symm
  have hdirh : forall z, DirectedOn (* <= *) (Set.range fun j => (h k j : D -> D) z)
:=
  fun z => directedOn_range.2 fun p q =>
    <max p q, hh_mono k (le_max_left p q) z, hh_mono k (le_max_right p q) z>
  obtain <j, hj> : exists j, s <= (h k j : D -> D) x := by

```

```

have hsup : sSup (Set.range fun j => (h k j : D -> D) x) = (a k : D -> D) x := by
  rw [sSup_range, <- hakx]
have hs : s << (a k : D -> D) x := hst.trans_le hk_1
obtain <_, <j, rfl>, hsj> :=
  (wayBelow_sSup_iff (Set.range_nonempty _) (hdirh x)).1 (by rwa [hsup])
exact <j, hsj.le>
obtain <j', hj'> : exists j', y <= (h k j' : D -> D) s := by
  have hsup : sSup (Set.range fun j => (h k j : D -> D) s) = (a k : D -> D) s := by
    rw [sSup_range, <- haks]
  have hy : y << (a k : D -> D) s := hyr.trans_le hk_2
  obtain <_, <j', rfl>, hyj> :=
    (wayBelow_sSup_iff (Set.range_nonempty _) (hdirh s)).1 (by rwa [hsup])
  exact <j', hyj.le>
let K := max k (max j j')
have hkj : k <= K := le_max_left _ _
have hjK : j <= K := (le_max_left j j').trans (le_max_right _ _)
have hj'K : j' <= K := (le_max_right j j').trans (le_max_right _ _)
have hsH : s <= (H K : D -> D) x :=
  hj.trans (monotoneHull_ge h hkj hjK x)
have hyH : y <= (H K : D -> D) s :=
  hj'.trans (monotoneHull_ge h hkj hj'K s)
have hyc : y <= (c K : D -> D) x :=
  hyH.trans ((H K).monotone hsH)
exact hyc.trans (le_iSup (fun n => (c n : D -> D) x) K)
rwa [hD.sSup_wayBelow] at hgoal

```

end Scott1972.ContinuousLattice

A.51 QLambda/ScottFixApproximation.lean

132 lines.

Lean 4 source

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/
import Scott1972.ContinuousLattice.FunctionSpaces

/-!
# Finite approximations to Scott fixed points

The least fixed point of a Scott-continuous endomap is the supremum of its
finite iterates from bottom. The accompanying chain and pre-fixed-point
lemmas are intended for induction arguments in recursive operational
adequacy proofs.
-/

namespace QLambda

open Scott1972.ContinuousLattice

namespace ScottFixApproximation

universe u

variable {D : Type u} [CompleteLattice D]

/-- The `n`th finite approximation to the least fixed point of `f`. -/
def iterateBot (f : ScottMap D D) (n : Nat) : D :=

```

```

((f : D -> D)^[n]) False

@[simp] theorem iterateBot_zero (f : ScottMap D D) :
  iterateBot f 0 = False :=
  rfl

@[simp] theorem iterateBot_succ (f : ScottMap D D) (n : Nat) :
  iterateBot f (n + 1) = f (iterateBot f n) := by
  change ((f : D -> D)^[n + 1]) False =
  (f : D -> D) ((f : D -> D)^[n]) False
  rw [Function.iterate_succ_apply]
  exact ((Function.Commute.self_iterate (f : D -> D) n).eq False).symm

/-- Successive finite approximations form an increasing chain. -/
theorem iterateBot_le_succ (f : ScottMap D D) (n : Nat) :
  iterateBot f n <= iterateBot f (n + 1) := by
  induction n with
  | zero => exact bot_le
  | succ n ih =>
    simp only [iterateBot_succ] using f.monotone ih

/-- Finite approximation from bottom is monotone in the iteration count. -/
theorem iterateBot_monotone (f : ScottMap D D) :
  Monotone (iterateBot f) :=
  monotone_nat_of_le_succ (iterateBot_le_succ f)

/-- The range of finite approximations is nonempty. -/
theorem iterateBot_range_nonempty (f : ScottMap D D) :
  (Set.range (iterateBot f)).Nonempty :=
  Set.range_nonempty _

/-- The range of finite approximations is directed. -/
theorem iterateBot_range_directed (f : ScottMap D D) :
  DirectedOn (* <= *) (Set.range (iterateBot f)) :=
  directedOn_range.2 fun m n =>
    <max m n, iterateBot_monotone f (le_max_left _ _),
    iterateBot_monotone f (le_max_right _ _)>

/-- Every finite approximation lies below every pre-fixed point. -/
theorem iterateBot_le_of_prefix (f : ScottMap D D) {x : D}
  (hx : f x <= x) (n : Nat) :
  iterateBot f n <= x := by
  induction n with
  | zero => exact bot_le
  | succ n ih =>
    rw [iterateBot_succ]
    exact (f.monotone ih).trans hx

/-- Every finite approximation lies below Scott's least fixed point. -/
theorem iterateBot_le_fix (f : ScottMap D D) (n : Nat) :
  iterateBot f n <= Proposition314.fix f :=
  iterateBot_le_of_prefix f (le_of_eq (Proposition314.fix_eq f)) n

/-- The supremum of all finite approximations from bottom. -/
noncomputable def iterateBotSup (f : ScottMap D D) : D :=
  bigcup n, iterateBot f n

/-- Scott continuity moves `f` through the supremum of its finite approximations. -/
theorem map_iterateBotSup (f : ScottMap D D) :
  f (iterateBotSup f) = bigcup n, f (iterateBot f n) := by
  unfold iterateBotSup
  rw [← sSup_range,
    f.preservesDirectedSup_coe (Set.range (iterateBot f))
  ]

```



```

      (iterateBot_range_nonempty f) (iterateBot_range_directed f),
    <- Set.range_comp, sSup_range]
  rfl

/-- The supremum of the finite approximations is itself a fixed point. -/
theorem iterateBotSup_fixed (f : ScottMap D D) :
  f (iterateBotSup f) = iterateBotSup f := by
  rw [map_iterateBotSup]
  apply le_antisymm
  * refine iSup_le fun n => ?_
    rw [ <- iterateBot_succ]
    exact le_iSup (iterateBot f) (n + 1)
  * refine iSup_le fun n => ?_
    cases n with
    | zero => exact bot_le
    | succ n =>
      rw [iterateBot_succ]
      exact le_iSup (fun k => f (iterateBot f k)) n

/-- Scott's least fixed point is the supremum of the finite iterates from bottom. -/
theorem fix_eq_iSup_iterateBot (f : ScottMap D D) :
  Proposition314.fix f = bigcup n, iterateBot f n := by
  symm
  apply Proposition314.fix_unique (iterateBotSup_fixed f)
  intro x hx
  exact iSup_le fun n => iterateBot_le_of_prefixed f hx n

/-- Range formulation of finite-iterate approximation to Scott's least fixed point. -/
theorem fix_eq_sSup_range_iterateBot (f : ScottMap D D) :
  Proposition314.fix f = sSup (Set.range (iterateBot f)) := by
  rw [sSup_range]
  exact fix_eq_iSup_iterateBot f

/-- Expanded formulation using `Function.iterate` directly. -/
theorem fix_eq_iSup_iterate (f : ScottMap D D) :
  Proposition314.fix f = bigcup n : Nat, ((f : D -> D)^[n]) False :=
  fix_eq_iSup_iterateBot f

end ScottFixApproximation

end QLambda

```

A.52 QLambda/ScottLowerSet.lean

264 lines.

Lean 4 source

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/
import Mathlib.Order.Closure
import Mathlib.Order.DirSupClosed

/-!
# Scott-closed lower sets

The Hoare-style lower powerdomain uses lower sets closed under all
directed suprema that exist in the underlying preorder. Unlike the
lattice of all lower sets, its joins apply Scott closure after union, so

```

```

a genuine directed limit need not be a compact principal element.
-/

open Set

namespace QLambda

universe u

namespace ScottLowerSet

variable {a b : Type u} [Preorder a] [Preorder b]

/-- A set is Scott-lower when it is downward closed and closed under
nonempty directed suprema that exist in the ambient preorder. -/
def IsClosed (s : Set a) : Prop :=
  IsLowerSet s /\ DirSupClosed s

/-- The least Scott-closed lower set containing `s`. -/
def closure (s : Set a) : Set a :=
  ?_0 {t : Set a | s ⊆ t /\ IsClosed t}

theorem subset_closure (s : Set a) : s ⊆ closure s := by
  intro x hx t ht
  exact ht.1 hx

theorem closure_lower (s : Set a) : IsLowerSet (closure s) := by
  intro a b hba ha t ht
  exact ht.2.1 hba (ha t ht)

theorem closure_dirSupClosed (s : Set a) : DirSupClosed (closure s) := by
  apply DirSupClosed.sInter
  intro t ht
  exact ht.2.2

theorem closure_closed (s : Set a) : IsClosed (closure s) :=
  <closure_lower s, closure_dirSupClosed s>

theorem closure_min {s t : Set a} (hst : s ⊆ t) (ht : IsClosed t) :
  closure s ⊆ t := by
  intro x hx
  exact hx t <hst, ht>

theorem closure_eq_self {s : Set a} (hs : IsClosed s) :
  closure s = s :=
  Set.Subset.antisymm (closure_min Subset.rfl hs) (subset_closure s)

/-- Scott-lower closure as an order-theoretic closure operator on sets. -/
def operator : ClosureOperator (Set a) :=
  ClosureOperator.ofPred closure IsClosed subset_closure closure_closed
  fun _ _ hst ht => closure_min hst ht

/-- Scott-closed lower subsets ordered by inclusion. -/
abbrev Carrier (a : Type u) [Preorder a] :=
  (operator (a := a)).ClosedS

instance : CompleteLattice (Carrier a) :=
  (operator (a := a)).gi.liftCompleteLattice

instance : SetLike (Carrier a) a where
  coe A := A.1
  coe_injective A B h := by
    apply Subtype.ext

```

```

    exact h

@[ext]
theorem ext {A B : Carrier a} (h : (A : Set a) = B) : A = B :=
  SetLike.coe_injective h

theorem lower (A : Carrier a) : IsLowerSet (A : Set a) := by
  have hclosed := A.2
  change IsClosed (A : Set a) at hclosed
  exact hclosed.1

theorem dirSupClosed (A : Carrier a) : DirSupClosed (A : Set a) := by
  have hclosed := A.2
  change IsClosed (A : Set a) at hclosed
  exact hclosed.2

/-- Embed a set by taking its Scott-lower closure. -/
def ofSet (s : Set a) : Carrier a :=
  (operator (a := a)).toClosed s

@[simp]
theorem coe_ofSet (s : Set a) : ((ofSet s : Carrier a) : Set a) = closure s :=
  rfl

theorem subset_ofSet (s : Set a) : s subseq ofSet s :=
  subset_closure s

theorem ofSet_le {s : Set a} {A : Carrier a} :
  ofSet s <= A <-> s subseq A := by
  constructor
  * intro h x hx
    exact h (subset_ofSet s hx)
  * intro h
    change closure s subseq (A : Set a)
    have hclosed := A.2
    change IsClosed (A : Set a) at hclosed
    exact closure_min h hclosed

/-- The Scott closure of a principal lower set. -/
def principal (a : a) : Carrier a :=
  ofSet (Set.Iic a)

theorem self_mem_principal (a : a) : a in principal a :=
  subset_ofSet (Set.Iic a) Set.self_mem_Iic

theorem principal_mono : Monotone (principal : a -> Carrier a) := by
  intro a b hab
  rw [principal, principal, ofSet_le]
  exact (Set.Iic_subset_Iic.mpr hab).trans (subset_ofSet _)

/-- Principal Scott-lower sets are ordinary order ideals: `Iic a` is
already closed under every directed supremum that exists. -/
@[simp]
theorem coe_principal (a : a) :
  ((principal a : Carrier a) : Set a) = Set.Iic a := by
  rw [principal, coe_ofSet, closure_eq_self]
  exact <isLowerSet_Iic a, dirSupClosed_Iic a>

@[simp]
theorem mem_principal {a b : a} :
  b in principal a <-> b <= a := by
  change b in ((principal a : Carrier a) : Set a) <-> b <= a
  rw [coe_principal]

```

```

exact Set.mem_Iic

theorem principal_le_iff_mem {a :  $\alpha$ } {A : Carrier a} :
  principal a <= A <-> a in A := by
  rw [principal, ofSet_le]
  constructor
  * intro h
    exact h Set.self_mem_Iic
  * intro ha b hba
    exact lower A hba ha

/-- Preservation of all nonempty directed suprema which happen to exist
in a basis. This is the appropriate continuity notion before taking a
dcpo completion. -/
def PreservesExistingDirectedSup (f :  $\alpha \rightarrow \beta$ ) : Prop :=
  forall ?d : Set  $\alpha$ ?, d.Nonempty  $\rightarrow$  DirectedOn (* <= *) d  $\rightarrow$ 
  forall ?a :  $\alpha$ ?, IsLUB d a  $\rightarrow$  IsLUB (f '' d) (f a)

theorem preservesExistingDirectedSup_id :
  PreservesExistingDirectedSup (id :  $\alpha \rightarrow \alpha$ ) := by
  intro d _ _ a ha
  constructor
  * rintro _ <x, hx, rfl>
    exact ha.1 hx
  * intro b hb
    exact ha.2 fun x hx => hb <x, hx, rfl>

theorem PreservesExistingDirectedSup.comp { $\alpha$  : Type u} [Preorder  $\alpha$ ]
  {f :  $\alpha \rightarrow \beta$ } {g :  $\beta \rightarrow \gamma$ }
  (hg : PreservesExistingDirectedSup g)
  (hf : PreservesExistingDirectedSup f) :
  PreservesExistingDirectedSup ((g :  $\beta \rightarrow \gamma$ ) comp (f :  $\alpha \rightarrow \beta$ )) := by
  intro d hd hdir a ha
  have hfLUB := hf hd hdir ha
  have himg_nonempty := hd.image f
  have himg_directed : DirectedOn (* <= *) (f '' d) := by
    intro _ hx _ hy
    obtain <x, hxd, rfl> := hx
    obtain <y, hyd, rfl> := hy
    obtain <z, hzd, hxz, hyz> := hdir x hxd y hyd
    exact <f z, <z, hzd, rfl>, f.mono hxz, f.mono hyz>
  simpa only [Set.image_image, Function.comp_apply] using
    hg himg_nonempty himg_directed hfLUB

/-- Inverse image along a continuous basis map preserves Scott-lower
closedness. -/
theorem isClosed_preimage (f :  $\alpha \rightarrow \beta$ )
  (hf : PreservesExistingDirectedSup f) {s : Set  $\beta$ } (hs : IsClosed s) :
  IsClosed (f  $^{-1}$  s) := by
  constructor
  * intro a b hab ha
    exact hs.1 (f.mono hab) ha
  * intro d hd hne hdir a ha
    have himg : f '' d subseteq s := by
      rintro _ <x, hxd, rfl>
      exact hd hxd
    exact hs.2 himg (hne.image f)
    (by
      intro _ hx _ hy
      obtain <x, hxd, rfl> := hx
      obtain <y, hyd, rfl> := hy
      obtain <z, hzd, hxz, hyz> := hdir x hxd y hyd
      exact <f z, <z, hzd, rfl>, f.mono hxz, f.mono hyz>)

```

```

      (hf hne hdir ha)

/-- Direct image followed by Scott-lower closure. -/
def map (f : a -> o b) (A : Carrier a) : Carrier b :=
  ofSet (f '' (A : Set a))

theorem map_mono (f : a -> o b) : Monotone (map f) := by
  intro A B hAB
  rw [map, ofSet_le]
  exact (Set.image_mono hAB).trans (subset_ofSet _)

/-- Preimage as a map between Scott-lower carriers. -/
def comap (f : a -> o b) (hf : PreservesExistingDirectedSup f)
  (B : Carrier b) : Carrier a :=
  <f ^-1' (B : Set b), by
    change IsClosed (f ^-1' (B : Set b))
    have hB := B.2
    change IsClosed (B : Set b) at hB
    exact isClosed_preimage f hf hB>

theorem map_le_iff_le_comap (f : a -> o b)
  (hf : PreservesExistingDirectedSup f) {A : Carrier a} {B : Carrier b} :
  map f A <= B <-> A <= comap f hf B := by
  rw [map, ofSet_le]
  constructor
  * intro h x hx
    exact h <x, hx, rfl>
  * rintro h _ <x, hx, rfl>
    exact h hx

@[simp]
theorem map_id (A : Carrier a) :
  map OrderHom.id A = A := by
  apply ext
  change closure (OrderHom.id '' (A : Set a)) = (A : Set a)
  have hA := A.2
  change IsClosed (A : Set a) at hA
  convert closure_eq_self hA using 1
  ext x
  simp

theorem map_comp {α : Type u} [Preorder α]
  (g : b -> o α) (hg : PreservesExistingDirectedSup g)
  (f : a -> o b) (A : Carrier a) :
  map (g.comp f) A = map g (map f A) := by
  apply le_antisymm
  * rw [map, ofSet_le]
    rintro _ <x, hx, rfl>
    exact subset_ofSet _
      <f x, subset_ofSet _ <x, hx, rfl>, rfl>
  * rw [map_le_iff_le_comap g hg, map, ofSet_le]
    rintro _ <x, hx, rfl>
    exact subset_ofSet _ <x, hx, rfl>

end ScottLowerSet

/-- Scott-closed lower subsets ordered by inclusion. -/
abbrev ScottLowerSet (a : Type u) [Preorder a] :=
  ScottLowerSet.Carrier a

end QLambda

```

A.53 QLambda/Soundness.lean

195 lines.

Lean 4 source

```
/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/
import QLambda.Interp

/-!
# Soundness of operational reduction

Every unweighted internal reduction refines the denotation of its source.
Top-level external reduction is exact after applying the selected Boolean
environment action. Weighted reduction is sound under an explicit abstract
closure specification for semantic application.
-/

namespace QLambda

open Scott1972.ContinuousLattice

universe u

section

variable (Q : (D : Type u) -> [CompleteLattice D] -> Type u)
variable [IsQuantumMonad Q]
variable (D_0 : QDomain.{u})
variable (j_0 : IsContinuousLatticeProjection D_0.carrier
  (QuantumFunctor (QModel Q) D_0.carrier))
variable [HasComputationChoice (SemanticComp Q D_0 j_0)]

/-- The additional, model-specific laws needed to lift weighted branches
through call-by-value semantic application.

This specification is deliberately specialized to the fixed recursive-domain
solution `Q,D_0,j_0`. Its fields say exactly that, for arbitrary
environment-indexed Scott maps and every environment, `weightedBranch` is
preserved when either the function computation or the argument computation is
replaced by one of its weighted branches. No concrete powerdomain, TT
relation, or global instance is asserted here. -/
class HasWeightedApplicationClosure
  [HasWeightedBranchSemantics (SemanticComp Q D_0 j_0)] : Prop where
  app_left :
    forall (mf mf' ma : ScottMap (Env (SemanticValue Q D_0 j_0))
      (SemanticComp Q D_0 j_0)) (p : Prob)
      (? : Env (SemanticValue Q D_0 j_0)),
      HasWeightedBranchSemantics.weightedBranch (mf ?) p (mf' ?) ->
      HasWeightedBranchSemantics.weightedBranch
        (applyComp (Q := Q) (D_0 := D_0) (j_0 := j_0) mf ma ?) p
        (applyComp (Q := Q) (D_0 := D_0) (j_0 := j_0) mf' ma ?)
  app_right :
    forall (mf ma ma' : ScottMap (Env (SemanticValue Q D_0 j_0))
      (SemanticComp Q D_0 j_0)) (p : Prob)
      (? : Env (SemanticValue Q D_0 j_0)),
      HasWeightedBranchSemantics.weightedBranch (ma ?) p (ma' ?) ->
      HasWeightedBranchSemantics.weightedBranch
        (applyComp (Q := Q) (D_0 := D_0) (j_0 := j_0) mf ma ?) p
        (applyComp (Q := Q) (D_0 := D_0) (j_0 := j_0) mf ma' ?)
```

```

/-- One internal operational step refines the source denotation. -/
theorem interp_step_le {Prim : Type}
  (primitive : Prim -> SemanticComp Q D_0 j_0)
  {M N : Term Prim} (h : Step M N)
  (? : Env (SemanticValue Q D_0 j_0)) :
  interp (Q := Q) (D_0 := D_0) (j_0 := j_0) primitive N ? <=
    interp (Q := Q) (D_0 := D_0) (j_0 := j_0) primitive M ? := by
  induction h generalizing ? with
  | beta x M V hV =>
    exact le_of_eq (interp_beta
      (Q := Q) (D_0 := D_0) (j_0 := j_0) primitive x M V hV ?).symm
  | rec_beta self arg M V hne hV =>
    exact le_of_eq (interp_rec_beta
      (Q := Q) (D_0 := D_0) (j_0 := j_0)
      primitive self arg M V hne hV ?).symm
  | intern_left M N =>
    exact interp_le_intern_left
      (Q := Q) (D_0 := D_0) (j_0 := j_0) primitive M N ?
  | intern_right M N =>
    exact interp_le_intern_right
      (Q := Q) (D_0 := D_0) (j_0 := j_0) primitive M N ?
  | app_left hstep ih =>
    rw [interp_app_apply, interp_app_apply]
    exact ScottMap.le_def.mp
      (applyComp_mono_left
        (Q := Q) (D_0 := D_0) (j_0 := j_0)
        (ScottMap.le_def.mpr fun sigma => ih sigma)) ?
  | app_right hM hstep ih =>
    rw [interp_app_apply, interp_app_apply]
    exact ScottMap.le_def.mp
      (applyComp_mono_right
        (Q := Q) (D_0 := D_0) (j_0 := j_0)
        (ScottMap.le_def.mpr fun sigma => ih sigma)) ?

/-- Reflexive-transitive internal reduction refines the initial denotation. -/
theorem interp_reduces_le {Prim : Type}
  (primitive : Prim -> SemanticComp Q D_0 j_0)
  {M N : Term Prim} (h : Reduces M N)
  (? : Env (SemanticValue Q D_0 j_0)) :
  interp (Q := Q) (D_0 := D_0) (j_0 := j_0) primitive N ? <=
    interp (Q := Q) (D_0 := D_0) (j_0 := j_0) primitive M ? := by
  induction h generalizing ? with
  | refl => exact le_refl
  | tail hred hstep ih =>
    exact (interp_step_le
      (Q := Q) (D_0 := D_0) (j_0 := j_0)
      primitive hstep ?).trans (ih ?)

/-- A top-level external step preserves its Boolean label and is denotational
equality after the corresponding external selection. `ExternalStep` has no
application-context constructors, so the top-level selection laws suffice. -/
theorem interp_external_step_select
  [HasExternalSelection (SemanticComp Q D_0 j_0)]
  {Prim : Type} (primitive : Prim -> SemanticComp Q D_0 j_0)
  {selected : Bool} {M N : Term Prim}
  (h : ExternalStep selected M N)
  (? : Env (SemanticValue Q D_0 j_0)) :
  HasExternalSelection.select selected
    (interp (Q := Q) (D_0 := D_0) (j_0 := j_0) primitive M ?) =
    interp (Q := Q) (D_0 := D_0) (j_0 := j_0) primitive N ? := by
  cases h with
  | left M N =>

```

```

    rw [interp_extern_apply]
    exact HasExternalSelection.select_false _ _
| right M N =>
    rw [interp_extern_apply]
    exact HasExternalSelection.select_true _ _

/-- The left branch of a top-level probabilistic choice carries its declared
weight in the model's weighted-branch relation. Application-context closure
is intentionally not claimed by this theorem. -/
theorem interp_prob_left_weighted
  [HasWeightedBranchSemantics (SemanticComp Q D_0 j_0)]
  {Prim : Type} (primitive : Prim -> SemanticComp Q D_0 j_0)
  (p : Prob) (M N : Term Prim) (hp_0 : 0 <= p) (hp_1 : p <= 1)
  (? : Env (SemanticValue Q D_0 j_0)) :
  HasWeightedBranchSemantics.weightedBranch
    (interp (Q := Q) (D_0 := D_0) (j_0 := j_0) primitive
      (.prob p M N) ?)
    p
    (interp (Q := Q) (D_0 := D_0) (j_0 := j_0) primitive M ?) := by
  rw [interp_prob_apply]
  exact HasWeightedBranchSemantics.prob_left p _ _ hp_0 hp_1

/-- The right branch of a top-level probabilistic choice carries weight
`1 - p`. A full `WeightedStep` theorem additionally needs closure of
`weightedBranch` under application. -/
theorem interp_prob_right_weighted
  [HasWeightedBranchSemantics (SemanticComp Q D_0 j_0)]
  {Prim : Type} (primitive : Prim -> SemanticComp Q D_0 j_0)
  (p : Prob) (M N : Term Prim) (hp_0 : 0 <= p) (hp_1 : p <= 1)
  (? : Env (SemanticValue Q D_0 j_0)) :
  HasWeightedBranchSemantics.weightedBranch
    (interp (Q := Q) (D_0 := D_0) (j_0 := j_0) primitive
      (.prob p M N) ?)
    (1 - p)
    (interp (Q := Q) (D_0 := D_0) (j_0 := j_0) primitive N ?) := by
  rw [interp_prob_apply]
  exact HasWeightedBranchSemantics.prob_right p _ _ hp_0 hp_1

/-- Every weighted operational step preserves its transition probability in
the model's weighted-branch relation. The theorem is abstract in the two
application-closure laws above; in particular, it does not claim that any
specific TT construction satisfies them. -/
theorem interp_weighted_step
  [HasWeightedBranchSemantics (SemanticComp Q D_0 j_0)]
  [HasWeightedApplicationClosure Q D_0 j_0]
  {Prim : Type} (primitive : Prim -> SemanticComp Q D_0 j_0)
  {M N : Term Prim} {p : Prob} (h : WeightedStep M p N)
  (? : Env (SemanticValue Q D_0 j_0)) :
  HasWeightedBranchSemantics.weightedBranch
    (interp (Q := Q) (D_0 := D_0) (j_0 := j_0) primitive M ?) p
    (interp (Q := Q) (D_0 := D_0) (j_0 := j_0) primitive N ?) := by
  induction h generalizing ? with
  | prob_left p M N hp_0 hp_1 =>
    exact interp_prob_left_weighted
      (Q := Q) (D_0 := D_0) (j_0 := j_0)
      primitive p M N hp_0 hp_1 ?
  | prob_right p M N hp_0 hp_1 =>
    exact interp_prob_right_weighted
      (Q := Q) (D_0 := D_0) (j_0 := j_0)
      primitive p M N hp_0 hp_1 ?
  | app_left hstep ih =>
    rw [interp_app_apply, interp_app_apply]
    exact HasWeightedApplicationClosure.app_left

```



```

      (interp primitive _) (interp primitive _) (interp primitive _)
      _ ? (ih ?)
| app_right hM hstep ih =>
  rw [interp_app_apply, interp_app_apply]
  exact HasWeightedApplicationClosure.app_right
    (interp primitive _) (interp primitive _) (interp primitive _)
    _ ? (ih ?)

end

end QLambda

```

A.54 QLambda/Syntax.lean

259 lines.

Lean 4 source

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/
import Mathlib.Data.Real.Basic
import Mathlib.Data.String.Lemmas

/-!
# Syntax of untyped quantum fun -calculus (`qfun`)

Paper S2. Terms with the three choice operators:


$$x \mid \lambda x. M, M \mid M, N$$


$$M \oplus_p N, M \sqcap N, M \mathbin{\Box} N$$

-/

namespace QLambda

/-- A variable name. -/
abbrev Name : Type := String

/-- Weight of a probabilistic choice. The reduction theory will
restrict to  $0 \leq p \wedge p \leq 1$ . -/
abbrev Prob : Type := ?

/-- Untyped `qfun` terms, parameterized by a signature of closed quantum
primitives. The default empty signature recovers the pure core language. -/
inductive Term (Prim : Type := PEmpty) where
  | var : Name -> Term Prim
  | lam : Name -> Term Prim -> Term Prim
  | app : Term Prim -> Term Prim -> Term Prim
  /-- A closed primitive computation supplied by the semantic model. -/
  | prim : Prim -> Term Prim
  /-- A recursive function value `let rec self arg = body`. -/
  | recLam : Name -> Name -> Term Prim -> Term Prim
  /-- Probabilistic choice  $M \oplus_p N$ . -/
  | prob : Prob -> Term Prim -> Term Prim -> Term Prim
  /-- Internal (demonic) choice  $M \sqcap N$ . -/
  | intern : Term Prim -> Term Prim -> Term Prim
  /-- External / interactive choice  $M \Box N$ . -/
  | extern : Term Prim -> Term Prim -> Term Prim

open Term

```

```

/-- Names occurring free. -/
def free {Prim : Type} : Term Prim -> List Name
| .var x => [x]
| .lam x M => (free M).filter (* != x)
| .app M N => free M ++ free N
| .prim _ => []
| .recLam self arg M =>
  ((free M).filter (* != self)).filter (* != arg)
| .prob _ M N => free M ++ free N
| .intern M N => free M ++ free N
| .extern M N => free M ++ free N

/-- A term is syntactically closed when it has no free names. -/
def Closed {Prim : Type} (M : Term Prim) : Prop :=
  free M = []

theorem closed_iff_forall_not_mem {Prim : Type} {M : Term Prim} :
  Closed M <=> forall x, x notin free M := by
  simp [Closed, List.eq_nil_iff_forall_not_mem]

/-- All names, free or bound (used only to pick a fresh rename). -/
def names {Prim : Type} : Term Prim -> List Name
| .var x => [x]
| .lam x M => x :: names M
| .app M N => names M ++ names N
| .prim _ => []
| .recLam self arg M => self :: arg :: names M
| .prob _ M N => names M ++ names N
| .intern M N => names M ++ names N
| .extern M N => names M ++ names N

/-- Every free name occurs among all names of the term. -/
theorem mem_names_of_mem_free {Prim : Type} :
  forall {M : Term Prim} {x : Name}, x in free M -> x in names M
| .var _, _, h => by simp [free, names] using h
| .lam y M, x, h => by
  simp only [free, List.mem_filter] at h
  simp [names, mem_names_of_mem_free h.1]
| .app M N, x, h => by
  simp only [free, List.mem_append] at h
  rcases h with h | h
  * simp [names, mem_names_of_mem_free h]
  * simp [names, mem_names_of_mem_free h]
| .prim _, _, h => by simp [free] at h
| .recLam self arg M, x, h => by
  simp only [free, List.mem_filter] at h
  simp [names, mem_names_of_mem_free h.1.1]
| .prob _ M N, x, h => by
  simp only [free, List.mem_append] at h
  rcases h with h | h
  * simp [names, mem_names_of_mem_free h]
  * simp [names, mem_names_of_mem_free h]
| .intern M N, x, h => by
  simp only [free, List.mem_append] at h
  rcases h with h | h
  * simp [names, mem_names_of_mem_free h]
  * simp [names, mem_names_of_mem_free h]
| .extern M N, x, h => by
  simp only [free, List.mem_append] at h
  rcases h with h | h
  * simp [names, mem_names_of_mem_free h]
  * simp [names, mem_names_of_mem_free h]

```

```

/-- A name longer than the total length of all names in `avoid`. -/
def fresh (avoid : List Name) : Name :=
  String.replicate ((avoid.map String.length).sum + 1) 'x'

private theorem length_le_sum_lengths_of_mem {s : Name} :
  forall {xs : List Name}, s in xs -> s.length <= (xs.map String.length).sum
| [], h => by simp at h
| a :: xs, h => by
  simp only [List.mem_cons] at h
  rcases h with rfl | h
  * simp
  * have ih := length_le_sum_lengths_of_mem h
    simp only [List.map_cons, List.sum_cons]
    omega

/-- The generated name is absent from the finite avoidance list. -/
@[simp]
theorem fresh_not_mem (avoid : List Name) : fresh avoid notin avoid := by
  intro h
  have hle := length_le_sum_lengths_of_mem h
  simp [fresh] at hle

/-- A generated fresh name differs from every member of its avoidance
list. -/
theorem fresh_ne_of_mem {avoid : List Name} {x : Name}
  (hx : x in avoid) : fresh avoid != x := by
  intro h
  apply fresh_not_mem avoid
  rw [h]
  exact hx

/-- Freshness transfers from an avoidance list to any list whose members
occur in it. -/
theorem fresh_not_mem_of_subset {avoid xs : List Name}
  (h : forall x, x in xs -> x in avoid) : fresh avoid notin xs := by
  intro hx
  exact fresh_not_mem avoid (h _ hx)

/-- Rename free occurrences of `x` to `y`. -/
def rename {Prim : Type} (x y : Name) : Term Prim -> Term Prim
| .var z => if z = x then .var y else .var z
| .lam z M => if z = x then .lam z M else .lam z (rename x y M)
| .app M N => .app (rename x y M) (rename x y N)
| .prim p => .prim p
| .recLam self arg M =>
  if self = x \ / arg = x then .recLam self arg M
  else .recLam self arg (rename x y M)
| .prob p M N => .prob p (rename x y M) (rename x y N)
| .intern M N => .intern (rename x y M) (rename x y N)
| .extern M N => .extern (rename x y M) (rename x y N)

/-- Constructor count (names ignored), so renaming is size-invariant. -/
def termSize {Prim : Type} : Term Prim -> Nat
| .var _ => 1
| .lam _ M => termSize M + 1
| .app M N => termSize M + termSize N + 1
| .prim _ => 1
| .recLam _ _ M => termSize M + 1
| .prob _ M N => termSize M + termSize N + 1
| .intern M N => termSize M + termSize N + 1
| .extern M N => termSize M + termSize N + 1

```

```

@[simp] theorem rename_termSize {Prim : Type} (x y : Name) :
  forall M : Term Prim, termSize (rename x y M) = termSize M
| .var z => by simp [rename, termSize]; split <;> simp [termSize]
| .lam z M => by simp [rename, termSize]; split <;> simp [termSize, rename_termSize]
| .app M N => by simp [rename, termSize, rename_termSize]
| .prim p => by simp [rename, termSize]
| .recLam self arg M => by
  simp [rename, termSize]
  split <;> simp [termSize, rename_termSize]
| .prob p M N => by simp [rename, termSize, rename_termSize]
| .intern M N => by simp [rename, termSize, rename_termSize]
| .extern M N => by simp [rename, termSize, rename_termSize]

/-- The body produced by the two-stage recursive-binder renaming in
`subst` has the same constructor count as the original body. -/
theorem recLam_subst_body_termSize {Prim : Type}
  (self arg x : Name) (s M : Term Prim) :
  let avoid := self :: arg :: x :: free s ++ free M ++ names s ++ names M
  let self' := if self in free s then fresh avoid else self
  let M' := if self' = self then M else rename self self' M
  let avoid' := self' :: avoid ++ names M'
  let arg' := if arg in free s then fresh avoid' else arg
  let M'' := if arg' = arg then M' else rename arg arg' M'
  termSize M'' = termSize M := by
  let avoid := self :: arg :: x :: free s ++ free M ++ names s ++ names M
  let self' := if self in free s then fresh avoid else self
  let M' := if self' = self then M else rename self self' M
  let avoid' := self' :: avoid ++ names M'
  let arg' := if arg in free s then fresh avoid' else arg
  let M'' := if arg' = arg then M' else rename arg arg' M'
  change termSize M'' = termSize M
  have hM' : termSize M' = termSize M := by
    dsimp [M']
    split <;> simp
  dsimp [M'']
  split
  * exact hM'
  * rw [rename_termSize, hM']

/-- Capture-avoiding substitution. -/
def subst {Prim : Type} (x : Name) (s : Term Prim) : Term Prim -> Term Prim
| .var y => if y = x then s else .var y
| .lam y M =>
  if y = x then .lam y M
  else if y in free s then
    let y' := fresh (y :: x :: free s ++ free M ++ names s ++ names M)
    .lam y' (subst x s (rename y y' M))
  else
    .lam y (subst x s M)
| .app M N => .app (subst x s M) (subst x s N)
| .prim p => .prim p
| .recLam self arg M =>
  if self = x \ / arg = x then
    .recLam self arg M
  else if self = arg then
    if self in free s then
      let z := fresh
      (self :: x :: free s ++ free M ++ names s ++ names M)
      .recLam z z (subst x s (rename self z M))
    else
      .recLam self arg (subst x s M)
  else
    let avoid := self :: arg :: x :: free s ++ free M ++ names s ++ names M

```

```

    let self' := if self in free s then fresh avoid else self
    let M' := if self' = self then M else rename self self' M
    let avoid' := self' :: avoid ++ names M'
    let arg' := if arg in free s then fresh avoid' else arg
    let M'' := if arg' = arg then M' else rename arg arg' M'
    have hM' : termSize M' = termSize M := by
      dsimp [M']
      split <;> simp
    have hM'' : termSize M'' = termSize M := by
      dsimp [M'']
      split
      * exact hM'
      * rw [rename_termSize, hM']
    .recLam self' arg' (subst x s M'')
  | .prob p M N => .prob p (subst x s M) (subst x s N)
  | .intern M N => .intern (subst x s M) (subst x s N)
  | .extern M N => .extern (subst x s M) (subst x s N)
termination_by t => termSize t
decreasing_by
  all_goals
    first
    | omega
    | (change termSize M'' < termSize M + 1; omega)
    | (simp [termSize, rename_termSize] <;> omega)

end QLambda

```

A.55 QLambda/TTComputationChoice.lean

213 lines.

Lean 4 source

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/
import QLambda.Soundness
import QLambda.TTExternalChoice
import QLambda.TTPhysicalEmbedding

/-!
# Complete computation choice for tagged TT continuations

The weighted relation is the least relation generated by the two physical
probabilistic branches and closure under Kleisli sequencing on either side.
The right-closure constructor is essential: a raw CPS continuation need not
preserve a probabilistic operation in its continuation argument, so the
top-level syntactic relation from `TTProbChoice` cannot honestly prove
call-by-value application-right closure.
-/

namespace QLambda

open Scott1972.ContinuousLattice

universe u

namespace TTContinuation

variable {n : Nat}

```

```

variable {D E : Type u} [CompleteLattice D] [CompleteLattice E]

/-- The three concrete choice operations. Its internal-choice inequalities
are proved pointwise as part of the value, before it is registered. -/
@[instance_reducible] noncomputable def externalComputationChoice :
  HasComputationChoice (TTEExternalContinuationPower n D) where
  prob p := liftTaggedBinary (probChoice (n := n) (D := D) p)
  intern := liftTaggedBinary (internalChoice (n := n) (D := D))
  extern := externalChoice
  left_le_intern := by
    intro q r i
    exact le_internalChoice_left (q i) (r i)
  right_le_intern := by
    intro q r i
    exact le_internalChoice_right (q i) (r i)

noncomputable instance instHasComputationChoiceTTEExternal :
  HasComputationChoice (TTEExternalContinuationPower n D) :=
  externalComputationChoice

theorem computation_prob_apply (p : Prob)
  (q r : TTEExternalContinuationPower n D) (i : Nat) :
  HasComputationChoice.prob p (q, r) i =
  probChoice p (q i, r i) := rfl

theorem computation_intern_apply
  (q r : TTEExternalContinuationPower n D) (i : Nat) :
  HasComputationChoice.intern (q, r) i =
  internalChoice (q i, r i) := rfl

/-- Kleisli extension of a tagged continuation preserves TT internal
choice exactly, because bind is evaluated coordinatewise. -/
theorem taggedBind_intern
  (h : ScottMap D (TTEExternalContinuationPower n E))
  (q r : TTEExternalContinuationPower n D) :
  taggedBindScott (n := n) h
    (HasComputationChoice.intern (q, r)) =
  HasComputationChoice.intern
    (taggedBindScott (n := n) h q,
     taggedBindScott (n := n) h r) := by
  funext i
  calc
    taggedBindScott (n := n) h
      (HasComputationChoice.intern (q, r)) i =
    TTContinuation.bind ((atCoordinate i).comp h)
      (HasComputationChoice.intern (q, r) i) :=
    taggedBind_atCoordinate (n := n) (E := E) h
      (HasComputationChoice.intern (q, r)) i
  _ = TTContinuation.bind ((atCoordinate i).comp h)
    (internalChoice (q i, r i)) := by
  rw [computation_intern_apply]
  _ = internalChoice
    (TTContinuation.bind ((atCoordinate i).comp h) (q i),
     TTContinuation.bind ((atCoordinate i).comp h) (r i)) :=
  bind_internalChoice ((atCoordinate i).comp h) (q i) (r i)
  _ = internalChoice
    (atCoordinate i (taggedBindScott (n := n) h q),
     atCoordinate i (taggedBindScott (n := n) h r)) := by
  rw [ <- taggedBind_atCoordinate (n := n) (E := E) h q i,
      <- taggedBind_atCoordinate (n := n) (E := E) h r i ]
  _ = HasComputationChoice.intern
    (taggedBindScott (n := n) h q,
     taggedBindScott (n := n) h r) i := by

```

```

simp [atCoordinate_apply, computation_intern_apply]

/-- Kleisli extension preserves TT probabilistic choice exactly,
because bind is evaluated coordinatewise. -/
theorem taggedBind_prob
  (h : ScottMap D (TTEsternalContinuationPower n E))
  (p : Prob) (q r : TTEsternalContinuationPower n D) :
  taggedBindScott (n := n) h
    (HasComputationChoice.prob p (q, r)) =
    HasComputationChoice.prob p
      (taggedBindScott (n := n) h q,
       taggedBindScott (n := n) h r) := by
funext i
calc
  taggedBindScott (n := n) h
    (HasComputationChoice.prob p (q, r)) i =
    TTContinuation.bind ((atCoordinate i).comp h)
      (HasComputationChoice.prob p (q, r) i) :=
    taggedBind_atCoordinate (n := n) (E := E) h
      (HasComputationChoice.prob p (q, r) i)
  _ = TTContinuation.bind ((atCoordinate i).comp h)
    (probChoice p (q i, r i)) := by
  rw [computation_prob_apply]
  _ = probChoice p
    (TTContinuation.bind ((atCoordinate i).comp h) (q i),
     TTContinuation.bind ((atCoordinate i).comp h) (r i)) :=
    bind_probChoice ((atCoordinate i).comp h) p (q i) (r i)
  _ = probChoice p
    (atCoordinate i (taggedBindScott (n := n) h q),
     atCoordinate i (taggedBindScott (n := n) h r)) := by
  rw [ <- taggedBind_atCoordinate (n := n) (E := E) h q i,
       <- taggedBind_atCoordinate (n := n) (E := E) h r i ]
  _ = HasComputationChoice.prob p
    (taggedBindScott (n := n) h q,
     taggedBindScott (n := n) h r) i := by
  simp [atCoordinate_apply, computation_prob_apply]

theorem computation_extern_select_false
  (q r : TTEsternalContinuationPower n D) :
  selectBranch false (HasComputationChoice.extern (q, r)) = q :=
  selectBranch_false_external q r

theorem computation_extern_select_true
  (q r : TTEsternalContinuationPower n D) :
  selectBranch true (HasComputationChoice.extern (q, r)) = r :=
  selectBranch_true_external q r

noncomputable instance instHasExternalSelectionTTEsternal :
  HasExternalSelection (TTEsternalContinuationPower n D) where
  select := selectBranch
  select_false := computation_extern_select_false
  select_true := computation_extern_select_true

/-- Honest weighted branches generated by physical probabilistic choice and
the two Kleisli-context closure principles needed by call-by-value
application. -/
inductive TaggedWeightedBranch (n : Nat) {D : Type u} [CompleteLattice D] :
  TTEsternalContinuationPower n D -> Prob ->
  TTEsternalContinuationPower n D -> Prop
| probLeft (p : Prob)
  (q r : TTEsternalContinuationPower n D)
  (hp_0 : 0 <= p) (hp_1 : p <= 1) :
  TaggedWeightedBranch n

```

```

      (liftTaggedBinary (probChoice (n := n) (D := D) p) (q, r)) p q
| probRight (p : Prob)
  (q r : TTEExternalContinuationPower n D)
  (hp_0 : 0 <= p) (hp_1 : p <= 1) :
  TaggedWeightedBranch n
    (liftTaggedBinary (probChoice (n := n) (D := D) p) (q, r))
    (1 - p) r
| bindLeft {source branch : TTEExternalContinuationPower n D} {p : Prob}
  (hbranch : TaggedWeightedBranch n source p branch)
  (h : ScottMap D (TTEExternalContinuationPower n D)) :
  TaggedWeightedBranch n
    (taggedBindScott h source) p (taggedBindScott h branch)
| bindRight
  (source : TTEExternalContinuationPower n D) (p : Prob)
  (h h' : ScottMap D (TTEExternalContinuationPower n D))
  (hbranch : forall d, TaggedWeightedBranch n (h d) p (h' d)) :
  TaggedWeightedBranch n
    (taggedBindScott h source) p (taggedBindScott h' source)

noncomputable instance instHasWeightedBranchSemanticsTTEExternal :
  HasWeightedBranchSemantics (TTEExternalContinuationPower n D) where
  weightedBranch := TaggedWeightedBranch n
  prob_left := by
    intro p q r hp_0 hp_1
    exact TaggedWeightedBranch.probLeft p q r hp_0 hp_1
  prob_right := by
    intro p q r hp_0 hp_1
    exact TaggedWeightedBranch.probRight p q r hp_0 hp_1

/-- The generated relation is closed under application-left by `bindLeft`
and under application-right by first closing each unfolded function and then
using `bindRight`. -/
noncomputable instance instHasWeightedApplicationClosureTTEExternal
  (D_0 : QDomain.{0})
  (j_0 : IsContinuousLatticeProjection D_0.carrier
    (QuantumFunctor
      (QModel (TTEExternalContinuationPower n)) D_0.carrier)) :
  HasWeightedApplicationClosure (TTEExternalContinuationPower n) D_0 j_0 where
  app_left := by
    intro mf mf' ma p ? hbranch
    exact TaggedWeightedBranch.bindLeft hbranch
      (applyContinuation (Q := TTEExternalContinuationPower n)
        (D_0 := D_0) (j_0 := j_0) ma ?)
  app_right := by
    intro mf ma ma' p ? hbranch
    apply TaggedWeightedBranch.bindRight (mf ?) p
      (applyContinuation (Q := TTEExternalContinuationPower n)
        (D_0 := D_0) (j_0 := j_0) ma ?)
      (applyContinuation (Q := TTEExternalContinuationPower n)
        (D_0 := D_0) (j_0 := j_0) ma' ?)
    intro f
    exact TaggedWeightedBranch.bindLeft hbranch
      (semanticUnfold (Q := TTEExternalContinuationPower n)
        (D_0 := D_0) (j_0 := j_0) f)

end TTContinuation

end QLambda

```

A.56 QLambda/TTContinuationMonad.lean

321 lines.

Lean 4 source

```
/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/
import QLambda.Monad
import QLambda.TTRoundedTheory

open Set

namespace QLambda

open Scott1972.ContinuousLattice

universe u v

namespace TTContinuation

def resultCode : OutputCode Nat PUnit.{1} :=
  <fun _ => <Set.univ, scottOpen_univ>>

abbrev TTResult (n : Nat) : Type :=
  @TTTokenTheory n PUnit.{1} inferInstance resultCode

abbrev TTContinuationPower (n : Nat) (D : Type u) [CompleteLattice D] :=
  ScottMap (ScottMap D (TTResult n)) (TTResult n)

variable {n : Nat}
variable {D E F : Type u}
variable [CompleteLattice D] [CompleteLattice E] [CompleteLattice F]

theorem iSup_apply {X : Type u} {Y : Type v}
  [CompleteLattice X] [CompleteLattice Y]
  (H : Nat -> ScottMap X Y) (x : X) :
  ((bigcup i, H i : ScottMap X Y) : X -> Y) x = bigcup i, H i x := by
  rw [show (bigcup i, H i : ScottMap X Y) = sSup (Set.range H) from sSup_range.symm,
    ScottMap.sSup_apply, <- Set.range_comp, sSup_range]
  rfl

noncomputable def evaluationAt (d : D) :
  ScottMap (ScottMap D (TTResult n)) (TTResult n) :=
  <fun k => k d, continuous_of_preservesDirectedSup fun S _ => by
    rw [ScottMap.sSup_apply]>

@[simp]
theorem evaluationAt_apply (d : D) (k : ScottMap D (TTResult n)) :
  evaluationAt (n := n) d k = k d :=
  rfl

noncomputable def precompose (f : ScottMap D E) :
  ScottMap (ScottMap E (TTResult n)) (ScottMap D (TTResult n)) :=
  <fun k => k.comp f, continuous_of_preservesDirectedSup fun S _ => by
    apply ScottMap.ext
    intro d
    rw [ScottMap.comp_apply, ScottMap.sSup_apply, ScottMap.sSup_apply,
      Set.image_image]
    congr 1>

@[simp]
theorem precompose_apply (f : ScottMap D E) (k : ScottMap E (TTResult n))
  (d : D) :
  precompose (n := n) f k d = k (f d) :=
```

```

rfl

noncomputable def continuation (h : ScottMap D (TTContinuationPower n E)) :
  ScottMap (ScottMap E (TTResult n)) (ScottMap D (TTResult n)) :=
  <fun k => (evaluationAt (n := n) k).comp h,
  continuous_of_preservesDirectedSup fun S hS hdir => by
    apply ScottMap.ext
    intro d
    change h d (sSup S) =
      ((sSup ((fun k : ScottMap E (TTResult n) =>
        (evaluationAt (n := n) k).comp h) '' S) :
        ScottMap D (TTResult n)) : D -> TTResult n) d
    rw [ScottMap.sSup_apply, Set.image_image]
    exact (h d).preservesDirectedSup_coe S hS hdir>

@[simp]
theorem continuation_apply (h : ScottMap D (TTContinuationPower n E))
  (k : ScottMap E (TTResult n)) (d : D) :
  continuation h k d = h d k :=
  rfl

noncomputable def unit : ScottMap D (TTContinuationPower n D) :=
  <fun d => evaluationAt (n := n) d,
  continuous_of_preservesDirectedSup fun S hS hdir => by
    apply ScottMap.ext
    intro k
    change k (sSup S) =
      ((sSup (evaluationAt (n := n) '' S) :
        TTContinuationPower n D) : ScottMap D (TTResult n) -> TTResult n) k
    rw [ScottMap.sSup_apply, Set.image_image]
    exact k.preservesDirectedSup_coe S hS hdir>

@[simp]
theorem unit_apply (d : D) (k : ScottMap D (TTResult n)) :
  unit (n := n) d k = k d :=
  rfl

noncomputable def map (f : ScottMap D E) :
  ScottMap (TTContinuationPower n D) (TTContinuationPower n E) :=
  precompose (n := n) (precompose (n := n) f)

@[simp]
theorem map_apply (f : ScottMap D E) (q : TTContinuationPower n D)
  (k : ScottMap E (TTResult n)) :
  map f q k = q (k.comp f) :=
  rfl

noncomputable def transpose (h : ScottMap D (TTContinuationPower n E)) :
  ScottMap (TTContinuationPower n D) (TTContinuationPower n E) :=
  precompose (n := n) (continuation h)

@[simp]
theorem transpose_apply (h : ScottMap D (TTContinuationPower n E))
  (q : TTContinuationPower n D) (k : ScottMap E (TTResult n)) :
  transpose h q k = q (continuation h k) :=
  rfl

noncomputable def bind (h : ScottMap D (TTContinuationPower n E)) :
  ScottMap (TTContinuationPower n D) (TTContinuationPower n E) :=
  transpose h

@[simp]
theorem bind_apply (h : ScottMap D (TTContinuationPower n E))

```

```

    (q : TTContinuationPower n D) (k : ScottMap E (TTResult n)) :
    bind h q k = q (continuation h k) :=
rfl

private theorem continuation_mono_left
  (k : ScottMap E (TTResult n)) :
  Monotone fun h : ScottMap D (TTContinuationPower n E) =>
    continuation h k := by
intro h g hhg d
exact hhg d k

private theorem continuation_sSup_left
  {S : Set (ScottMap D (TTContinuationPower n E))}
  (k : ScottMap E (TTResult n)) :
  continuation (sSup S) k =
    sSup ((fun h : ScottMap D (TTContinuationPower n E) =>
      continuation h k) '' S) := by
apply ScottMap.ext
intro d
change
  ((sSup S : ScottMap D (TTContinuationPower n E)) d) k =
    ((sSup ((fun h : ScottMap D (TTContinuationPower n E) =>
      continuation h k) '' S) : ScottMap D (TTResult n)) d)
rw [ScottMap.sSup_apply, ScottMap.sSup_apply, ScottMap.sSup_apply,
  Set.image_image]
congr 1
ext y
constructor
* rintro <h, hhS, rfl>
  exact <continuation h k, <h, hhS, rfl>, rfl>
* rintro <_, <h, hhS, rfl>, rfl>
  exact <h, hhS, rfl>

/-- Kleisli extension is Scott-continuous also in its continuation
argument. -/
noncomputable def bindScott :
  ScottMap (ScottMap D (TTContinuationPower n E))
  (ScottMap (TTContinuationPower n D) (TTContinuationPower n E)) :=
<bind, continuous_of_preservesDirectedSup fun S hS hdir => by
  apply ScottMap.ext
  intro q
  apply ScottMap.ext
  intro k
  let T : Set (ScottMap D (TTResult n)) :=
    (fun h : ScottMap D (TTContinuationPower n E) =>
      continuation h k) '' S
  have hT : T.Nonempty := hS.image _
  have hTdir : DirectedOn (* <= *) T := by
    rintro _ <h, hhS, rfl> _ <g, hgS, rfl>
    obtain <z, hzS, hhz, hgz> := hdir h hhS g hgS
    exact <continuation z k, <z, hzS, rfl>,
      continuation_mono_left (n := n) k hhz,
      continuation_mono_left (n := n) k hgz>
  have hq := q.preservesDirectedSup_coe T hT hTdir
  change q (continuation (sSup S) k) =
    ((sSup (bind '' S) :
      ScottMap (TTContinuationPower n D)
      (TTContinuationPower n E)) q) k
rw [continuation_sSup_left (n := n) k, hq,
  ScottMap.sSup_apply, ScottMap.sSup_apply,
  Set.image_image, Set.image_image]
congr 1
ext y

```

```

    constructor
    * rintro <h, hhS, rfl>
      exact <bind h, <h, hhS, rfl>, rfl>
    * rintro <_, <h, hhS, rfl>, rfl>
      exact <h, hhS, rfl>>

@[simp]
theorem bindScott_apply (h : ScottMap D (TTContinuationPower n E)) :
  bindScott (n := n) h = bind h :=
  rfl

theorem map_id :
  map (n := n) (ScottMap.idMap : ScottMap D D) = ScottMap.idMap := by
  apply ScottMap.ext
  intro q
  apply ScottMap.ext
  intro k
  rfl

theorem map_comp (f : ScottMap E F) (g : ScottMap D E) :
  map (n := n) (f.comp g) = (map f).comp (map g) := by
  apply ScottMap.ext
  intro q
  apply ScottMap.ext
  intro k
  rfl

theorem map_mono {f g : ScottMap D E} (hfg : f <= g) :
  map (n := n) f <= map g := by
  intro q k
  exact q.monotone (fun d => k.monotone (hfg d))

theorem map_iSup (G : Nat -> ScottMap D E) (hG : Monotone G) :
  map (n := n) (bigcup i, G i) = bigcup i, map (G i) := by
  have hinner (k : ScottMap E (TTResult n)) :
    k.comp (bigcup i, G i) = bigcup i, k.comp (G i) := by
    apply ScottMap.ext
    intro d
    rw [ScottMap.comp_apply, iSup_apply G d,
      iSup_apply (X := D) (Y := TTResult n) (fun i => k.comp (G i)) d]
    have hdir : DirectedOn (* <= *) (Set.range fun i => G i d) :=
      directedOn_range.2 fun i j =>
        <max i j, hG (le_max_left i j) d, hG (le_max_right i j) d>
    have hpres := k.preservesDirectedSup_coe
      (Set.range fun i => G i d) (Set.range_nonempty _) hdir
    rw [sSup_range, <- Set.range_comp, sSup_range] at hpres
    simpa [Function.comp_def, ScottMap.comp_apply] using hpres
  apply ScottMap.ext
  intro q
  apply ScottMap.ext
  intro k
  rw [map_apply, hinner]
  have hdir : DirectedOn (* <= *)
    (Set.range fun i => k.comp (G i)) :=
    directedOn_range.2 fun i j =>
      <max i j,
        fun d => k.monotone (hG (le_max_left i j) d),
        fun d => k.monotone (hG (le_max_right i j) d)>
  have hpres := q.preservesDirectedSup_coe
    (Set.range fun i => k.comp (G i))
    (Set.range_nonempty _) hdir
  rw [sSup_range, <- Set.range_comp, sSup_range] at hpres
  rw [hpres,

```

```

    iSup_apply (X := TTContinuationPower n D) (Y := TTContinuationPower n E)
      (fun i => map (n := n) (G i)) q,
    iSup_apply (X := ScottMap E (TTResult n)) (Y := TTResult n)
      (fun i => map (n := n) (G i) q) k]
  rfl

theorem bind_unit :
  bind (n := n) (unit (n := n) : ScottMap D (TTContinuationPower n D)) =
    ScottMap.idMap := by
  apply ScottMap.ext
  intro q
  apply ScottMap.ext
  intro k
  rfl

theorem unit_bind (h : ScottMap D (TTContinuationPower n E)) :
  (bind h).comp (unit (n := n)) = h := by
  apply ScottMap.ext
  intro d
  apply ScottMap.ext
  intro k
  rfl

theorem bind_assoc (h : ScottMap D (TTContinuationPower n E))
  (g : ScottMap E (TTContinuationPower n F)) :
  (bind g).comp (bind h) = bind ((bind g).comp h) := by
  apply ScottMap.ext
  intro q
  apply ScottMap.ext
  intro k
  rfl

theorem map_eq_bind_unit (f : ScottMap D E) :
  map (n := n) f = bind ((unit (n := n)).comp f) := by
  apply ScottMap.ext
  intro q
  apply ScottMap.ext
  intro k
  rfl

noncomputable instance instIsQuantumPowerModel :
  IsQuantumPowerModel (TTContinuationPower n) where
  str := fun _ _ => inferInstance
  map := fun f => map (n := n) f
  map_id := map_id (n := n)
  map_comp := map_comp (n := n)
  map_mono := map_mono (n := n)
  map_iSup := map_iSup (n := n)
  closed := by
    intro D _ hD
    exact omegaQVA_closed_under_functionSpace
      (omegaQVA_closed_under_functionSpace hD (inferInstance : IsOmegaQVA (TTResult n)))
      (inferInstance : IsOmegaQVA (TTResult n))

noncomputable instance instIsQuantumMonad :
  IsQuantumMonad (TTContinuationPower n) where
  unit := unit (n := n)
  bind := bindScott (n := n)
  bind_unit := bind_unit (n := n)
  unit_bind := unit_bind (n := n)
  bind_assoc := bind_assoc (n := n)
  map_eq_bind_unit := map_eq_bind_unit (n := n)

```

```

/-- The concrete fixed-register Scott-continuation quantum power model. -/
noncomputable def model (n : Nat) : QuantumPowerModel where
  Power := TTContinuationPower n

end TTContinuation

end QLambda

```

A.57 QLambda/TTEExternalChoice.lean

565 lines.

Lean 4 source (lines 1–400)

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/
import QLambda.Effects
import QLambda.OmegaQVA
import QLambda.TTInternalChoice
import QLambda.TTProbChoice

/-!
# Tagged TT computations

Exact external selection needs a carrier capable of retaining two arbitrary
computations. A countable binary tree supplies that structure. The root is
coordinate `0`; the left and right subtrees use the odd and positive-even
coordinates respectively.

Unlike a bare path-indexed complete lattice, this carrier is also closed under
the `?QVA` requirements of `IsQuantumPowerModel`: it is a countable product.
The monad below is the reader transformer of the underlying TT continuation
monad, with unit, map, and bind evaluated at each tree coordinate.
-/

namespace QLambda

open Scott1972.ContinuousLattice

universe u

namespace TTContinuation

variable {n : Nat}
variable {D E F : Type u}
variable [CompleteLattice D] [CompleteLattice E] [CompleteLattice F]

/-- A countably tagged family of computations. -/
abbrev BranchTagged (C : Type u) := Nat -> C

/-- The complete TT computation carrier with explicit external branches. -/
abbrev TTEExternalContinuationPower (n : Nat) (D : Type u)
  [CompleteLattice D] :=
  BranchTagged (TTContinuationPower n D)

private noncomputable def evalBranch {C : Type u} [CompleteLattice C]
  (i : Nat) : ScottMap (BranchTagged C) C :=
  <fun q => q i, continuous_of_preservesDirectedSup fun S _ => by
    rw [sSup_apply_eq_sSup_image]>

```

```

/-- Public coordinate evaluation for indexed logical relations. -/
noncomputable def atCoordinate {C : Type u} [CompleteLattice C]
  (i : Nat) : ScottMap (BranchTagged C) C :=
  <fun q => q i, continuous_of_preservesDirectedSup fun S _ => by
    rw [sSup_apply_eq_sSup_image]>

@[simp]
theorem atCoordinate_apply {C : Type u} [CompleteLattice C]
  (i : Nat) (q : BranchTagged C) :
  atCoordinate i q = q i :=
  rfl

/-- Coordinatewise lifting of a Scott map. -/
noncomputable def liftTaggedMap {C C' : Type u}
  [CompleteLattice C] [CompleteLattice C']
  (f : ScottMap C C') : ScottMap (BranchTagged C) (BranchTagged C') :=
  <fun q i => f (q i), continuous_of_preservesDirectedSup fun S hS hdir => by
    funext i
    have hi := f.preservesDirectedSup_coe
      ((fun q : BranchTagged C => q i) '' S) (hS.image _)
      (directedOn_image_monotone hdir fun _ _ h => h i)
    rw [sSup_apply_eq_sSup_image, sSup_apply_eq_sSup_image]
    simp only [Set.image_image] using hi>

/-- Coordinatewise lifting of a binary Scott map. -/
noncomputable def liftTaggedBinary {C : Type u} [CompleteLattice C]
  (f : ScottMap (C x C) C) :
  ScottMap (BranchTagged C x BranchTagged C) (BranchTagged C) :=
  <fun qr i => f (qr.1 i, qr.2 i),
  continuous_of_preservesDirectedSup fun S hS hdir => by
    funext i
    let T : Set (C x C) :=
      (fun qr : BranchTagged C x BranchTagged C =>
        (qr.1 i, qr.2 i)) '' S
    have hT : T.Nonempty := hS.image _
    have hTdir : DirectedOn (* <= *) T := by
      rintro _ <q, hqS, rfl> _ <r, hrS, rfl>
      obtain <s, hsS, hqs, hrs> := hdir q hqS r hrS
      exact <(s.1 i, s.2 i), <s, hsS, rfl>,
        <hqs.1 i, hqs.2 i>, <hrs.1 i, hrs.2 i>>
    have hf := f.preservesDirectedSup_coe T hT hTdir
    change f ((sSup S).1 i, (sSup S).2 i) =
      (sSup ((fun qr : BranchTagged C x BranchTagged C =>
        fun j => f (qr.1 j, qr.2 j)) '' S) : BranchTagged C) i
    rw [sSup_apply_eq_sSup_image, Prod.fst_sSup, Prod.snd_sSup,
      sSup_apply_eq_sSup_image, sSup_apply_eq_sSup_image]
    have hpair :
      (sSup T : C x C) =
        (sSup ((fun q : BranchTagged C => q i) '' (Prod.fst '' S)),
          sSup ((fun q : BranchTagged C => q i) '' (Prod.snd '' S))) := by
      apply Prod.ext
    * rw [Prod.fst_sSup]
      simp only [T, Set.image_image]
    * rw [Prod.snd_sSup]
      simp only [T, Set.image_image]
    rw [← hpair, hf]
    simp only [T, Set.image_image]>

@[simp] theorem liftTaggedMap_apply {C C' : Type u}
  [CompleteLattice C] [CompleteLattice C']
  (f : ScottMap C C') (q : BranchTagged C) (i : Nat) :
  liftTaggedMap f q i = f (q i) := rfl

```

```

@[simp] theorem liftTaggedBinary_apply {C : Type u} [CompleteLattice C]
  (f : ScottMap (C x C) C) (q r : BranchTagged C) (i : Nat) :
  liftTaggedBinary f (q, r) i = f (q i, r i) := rfl

private def externalChoiceAt {C : Type u} [CompleteLattice C]
  (qr : BranchTagged C x BranchTagged C) : BranchTagged C
  | 0 => False
  | i + 1 => if i % 2 = 0 then qr.1 (i / 2) else qr.2 (i / 2)

/-- Pair two complete trees under a fresh unresolved root. -/
noncomputable def externalChoice {C : Type u} [CompleteLattice C] :
  ScottMap (BranchTagged C x BranchTagged C) (BranchTagged C) :=
  <externalChoiceAt, continuous_of_preservesDirectedSup fun S hS _ => by
    funext i
    cases i with
    | zero =>
      rw [sSup_apply_eq_sSup_image]
      simp only [externalChoiceAt, Function.eval_apply, Set.image_image]
      have : (fun _ : BranchTagged C x BranchTagged C => (False : C)) '' S = {False} := by
        ext x
        constructor
        * rintro <_, _, rfl>
        simp
        * intro hx
        obtain <q, hq> := hS
        exact <q, hq, Set.mem_singleton_iff.mp hx |>.symm>
      rw [this]
      simp
    | succ i =>
      rw [sSup_apply_eq_sSup_image]
      by_cases hi : i % 2 = 0
      * simp only [externalChoiceAt, Function.eval_apply, Set.image_image,
        hi, if_pos]
      rw [Prod.fst_sSup, sSup_apply_eq_sSup_image]
      simp only [Set.image_image]
      * simp only [externalChoiceAt, Function.eval_apply, Set.image_image,
        hi, if_neg]
      rw [Prod.snd_sSup, sSup_apply_eq_sSup_image]
      simp only [if_false, Set.image_image]>

/-- Select the left (odd coordinates) or right (positive-even coordinates)
subtree. -/
noncomputable def selectBranch {C : Type u} [CompleteLattice C]
  (tag : Bool) : ScottMap (BranchTagged C) (BranchTagged C) :=
  <fun q i => if tag then q (2 * i + 2) else q (2 * i + 1),
  continuous_of_preservesDirectedSup fun S _ => by
    funext i
    rw [sSup_apply_eq_sSup_image, sSup_apply_eq_sSup_image]
    cases tag
    * change sSup ((fun q : BranchTagged C => q (2 * i + 1)) '' S) =
      (sSup ((fun q : BranchTagged C => fun j => q (2 * j + 1)) '' S) :
        BranchTagged C) i
      rw [sSup_apply_eq_sSup_image]
      simp only [Set.image_image]
    * change sSup ((fun q : BranchTagged C => q (2 * i + 2)) '' S) =
      (sSup ((fun q : BranchTagged C => fun j => q (2 * j + 2)) '' S) :
        BranchTagged C) i
      rw [sSup_apply_eq_sSup_image]
      simp only [Set.image_image]>

@[simp] theorem selectBranch_false_external {C : Type u} [CompleteLattice C]
  (q r : BranchTagged C) :
  selectBranch false (externalChoice (q, r)) = q := by

```



```

funext i
change (if (2 * i) % 2 = 0 then q ((2 * i) / 2) else r ((2 * i) / 2)) = q i
simp

@[simp] theorem selectBranch_true_external {C : Type u} [CompleteLattice C]
  (q r : BranchTagged C) :
  selectBranch true (externalChoice (q, r)) = r := by
  funext i
  change (if (2 * i + 1) % 2 = 0 then q ((2 * i + 1) / 2)
    else r ((2 * i + 1) / 2)) = r i
  have hdiv : (2 * i + 1) / 2 = i := by omega
  simp [hdiv]

@[simp] theorem externalChoice_root_bot {C : Type u} [CompleteLattice C]
  (q r : BranchTagged C) :
  externalChoice (q, r) 0 = False :=
  rfl

/-- External pairing leaves the root unresolved. Any binary operation
that is nontrivial at the root is therefore a different computation. -/
theorem externalChoice_ne_liftTaggedBinary {C : Type u} [CompleteLattice C]
  (f : ScottMap (C x C) C) (q r : BranchTagged C)
  (hne : f (q 0, r 0) != False) :
  externalChoice (q, r) != liftTaggedBinary f (q, r) := by
  intro heq
  apply hne
  have h0 := congrArg (fun z => z 0) heq
  rw [externalChoice_root_bot, liftTaggedBinary_apply] at h0
  exact h0.symm

/-- External choice is not identified with TT internal choice. -/
theorem externalChoice_ne_internalChoice
  (q r : TTExternalContinuationPower n D)
  (hne : q 0 sqsup r 0 != False) :
  externalChoice (q, r) !=
    liftTaggedBinary (internalChoice (n := n) (D := D)) (q, r) :=
  externalChoice_ne_liftTaggedBinary
    (internalChoice (n := n) (D := D)) q r (by
    simp [internalChoice_eq_sup] using hne)

/-! ## Reader-transformer quantum monad -/

noncomputable def taggedMap (f : ScottMap D E) :
  ScottMap (TTExternalContinuationPower n D)
    (TTExternalContinuationPower n E) :=
  liftTaggedMap (TTContinuation.map (n := n) f)

noncomputable def taggedUnit :
  ScottMap D (TTExternalContinuationPower n D) :=
  <fun d _ => TTContinuation.unit (n := n) d,
  continuous_of_preservesDirectedSup fun S hS hdir => by
    funext i
    rw [sSup_apply_eq_sSup_image]
    simp only [Set.image_image] using
      (TTContinuation.unit (n := n) :
        ScottMap D (TTContinuationPower n D)).preservesDirectedSup_coe S hS hdir>

private noncomputable def taggedBindAt
  (h : ScottMap D (TTExternalContinuationPower n E)) :
  ScottMap (TTExternalContinuationPower n D)
    (TTExternalContinuationPower n E) :=
  <fun q i =>
    TTContinuation.bind

```

```

      ((evalBranch (C := TTContinuationPower n E) i).comp h) (q i),
continuous_of_preservesDirectedSup fun S hS hdir => by
  funext i
  have hi := (TTContinuation.bind
    ((evalBranch (C := TTContinuationPower n E) i).comp h)).preservesDirectedSup_coe
    ((fun q : TTEExternalContinuationPower n D => q i) '' S)
    (hS.image _) (directedOn_image_monotone hdir fun _ _ hq => hq i)
  rw [sSup_apply_eq_sSup_image, sSup_apply_eq_sSup_image]
  simpa only [Set.image_image] using hi>

noncomputable def taggedBindScott :
  ScottMap (ScottMap D (TTEExternalContinuationPower n E))
    (ScottMap (TTEExternalContinuationPower n D)
      (TTEExternalContinuationPower n E)) :=
<taggedBindAt, continuous_of_preservesDirectedSup fun S hS hdir => by
  apply ScottMap.ext
  intro q
  funext i
  let K := fun h : ScottMap D (TTEExternalContinuationPower n E) =>
    (evalBranch (C := TTContinuationPower n E) i).comp h
  have hK : K (sSup S) = sSup (K '' S) := by
    apply ScottMap.ext
    intro d
    change (sSup S : ScottMap D
      (TTEExternalContinuationPower n E)) d i =
      (sSup (K '' S) : ScottMap D (TTContinuationPower n E)) d
  rw [ScottMap.sSup_apply, sSup_apply_eq_sSup_image, ScottMap.sSup_apply]
  simp only [Set.image_image]
  change sSup ((fun h : ScottMap D
    (TTEExternalContinuationPower n E) => h d i) '' S) =
    sSup ((fun h : ScottMap D
      (TTEExternalContinuationPower n E) => h d i) '' S)
  rfl
  have hKS : (K '' S).Nonempty := hS.image K
  have hKdir : DirectedOn (* <= *) (K '' S) :=
    directedOn_image_monotone hdir fun _ _ hh d => hh d i
  have hb := (TTContinuation.bindScott (n := n)
    (D := D) (E := E)).preservesDirectedSup_coe
    (K '' S) hKS hKdir
  change TTContinuation.bind (K (sSup S)) (q i) =
    (sSup (taggedBindAt '' S) :
      ScottMap (TTEExternalContinuationPower n D)
        (TTEExternalContinuationPower n E)) q i
  rw [hK]
  have hbq := congrArg
    (fun m : ScottMap (TTContinuationPower n D)
      (TTContinuationPower n E) => m (q i)) hb
  calc
    TTContinuation.bind (sSup (K '' S)) (q i) =
      (sSup ((fun k => TTContinuation.bind k) '' (K '' S)) :
        ScottMap (TTContinuationPower n D)
          (TTContinuationPower n E)) (q i) := hbq
  _ = (sSup (taggedBindAt '' S) :
    ScottMap (TTEExternalContinuationPower n D)
      (TTEExternalContinuationPower n E)) q i := by
  rw [ScottMap.sSup_apply, ScottMap.sSup_apply,
    sSup_apply_eq_sSup_image]
  congr 1
  ext y
  constructor
  * rintro <_, <_, <h, hh, rfl>, rfl>, rfl>
  exact <taggedBindAt h q,
    <taggedBindAt h, <h, hh, rfl>, rfl>, rfl>

```

```

      * rintro <_, <_, <h, hh, rfl>, rfl>, rfl>
      exact <TTContinuation.bind (K h),
        <K h, <h, hh, rfl>, rfl>, rfl>>

theorem taggedMap_id :
  taggedMap (n := n) (ScottMap.idMap : ScottMap D D) = ScottMap.idMap := by
  apply ScottMap.ext
  intro q
  funext i
  exact congrArg (fun f : ScottMap (TTContinuationPower n D)
    (TTContinuationPower n D) => f (q i)) (TTContinuation.map_id (n := n))

theorem taggedMap_comp (f : ScottMap E F) (g : ScottMap D E) :
  taggedMap (n := n) (f.comp g) =
    (taggedMap f).comp (taggedMap g) := by
  apply ScottMap.ext
  intro q
  funext i
  exact congrArg (fun h : ScottMap (TTContinuationPower n D)
    (TTContinuationPower n F) => h (q i))
    (TTContinuation.map_comp (n := n) f g)

theorem taggedMap_mono {f g : ScottMap D E} (hfg : f <= g) :
  taggedMap (n := n) f <= taggedMap g :=
  fun q i => TTContinuation.map_mono (n := n) hfg (q i)

theorem taggedMap_iSup (G : Nat -> ScottMap D E) (hG : Monotone G) :
  taggedMap (n := n) (bigcup i, G i) = bigcup i, taggedMap (G i) := by
  apply ScottMap.ext
  intro q
  funext i
  have hbase := congrArg
    (fun m : ScottMap (TTContinuationPower n D) (TTContinuationPower n E) =>
      m (q i)) (TTContinuation.map_iSup (n := n) G hG)
  have houter := TTContinuation.iSup_apply
    (X := TTEExternalContinuationPower n D)
    (Y := TTEExternalContinuationPower n E)
    (fun j => taggedMap (n := n) (G j)) q
  have hcoord := congrArg
    (fun z : TTEExternalContinuationPower n E => z i) houter
  have hinner := _root_.iSup_apply
    (f := fun j => taggedMap (n := n) (G j) q) (a := i)
  have hbaseEval := TTContinuation.iSup_apply
    (X := TTContinuationPower n D) (Y := TTContinuationPower n E)
    (fun j => TTContinuation.map (n := n) (G j)) (q i)
  exact hbase.trans (hbaseEval.trans (hinner.symm.trans hcoord.symm))

/-- External selection distributes through tagged bind only when it
reindexes both the source and the value continuation. Omitting the latter
reindexing is false in this tagged reader model. -/
theorem selectBranch_taggedBind
  (selected : Bool)
  (h : ScottMap D (TTEExternalContinuationPower n E))
  (q : TTEExternalContinuationPower n D) :
  selectBranch selected (taggedBindScott (n := n) h q) =
    taggedBindScott (n := n) ((selectBranch selected).comp h)
    (selectBranch selected q) := by
  funext i
  cases selected <;> rfl

theorem taggedBind_atCoordinate
  (h : ScottMap D (TTEExternalContinuationPower n E))
  (q : TTEExternalContinuationPower n D)

```

```

    (i : Nat) :
    atCoordinate i (taggedBindScott (n := n) h q) =
      TTContinuation.bind ((atCoordinate i).comp h) (q i) := by
rfl

/-- A tagged computation that does not use the external-branch heap. -/
def CoordinateConstant {C : Type u} [CompleteLattice C]
  (q : BranchTagged C) : Prop :=
  forall i j : Nat, q i = q j

theorem taggedUnit_coordinateConstant (d : D) :
  CoordinateConstant
    (taggedUnit (n := n) d : TTEnternalContinuationPower n D) := by
  intro i j
  rfl

theorem selectBranch_coordinateConstant {C : Type u} [CompleteLattice C]
  (b : Bool) {q : BranchTagged C} (hq : CoordinateConstant q) :
  selectBranch b q = q := by
  funext i
  cases b
  * exact hq (2 * i + 1) i
  * exact hq (2 * i + 2) i

/-- If the Kleisli continuation is coordinate-constant, selection commutes
past bind without reindexing `h`. -/
theorem selectBranch_taggedBind_of_coordinateConstant
  (h : ScottMap D (TTEnternalContinuationPower n E))
  (hh : forall d, CoordinateConstant (h d))
  (q : TTEnternalContinuationPower n D)
  (b : Bool) :
  selectBranch b (taggedBindScott (n := n) h q) =
    taggedBindScott (n := n) h (selectBranch b q) := by
  have hcomp : (selectBranch b).comp h = h := by
    apply ScottMap.ext
  intro d

```

Lean 4 source (lines 401–565)

```

    exact selectBranch_coordinateConstant b (hh d)
  rw [selectBranch_taggedBind, hcomp]

theorem taggedBind_root_bot
  (h : ScottMap D (TTEnternalContinuationPower n E))
  (q : TTEnternalContinuationPower n D)
  (hq : q 0 = False) :
  taggedBindScott (n := n) h q 0 = False := by
  change
    TTContinuation.bind
      ((evalBranch (C := TTContinuationPower n E) 0).comp h) (q 0) = False
  rw [hq]
  apply ScottMap.ext
  intro k
  rw [bind_apply,
    ScottMap.bot_apply (D := ScottMap D (TTResult n)) (D' := TTResult n),
    ScottMap.bot_apply (D := ScottMap E (TTResult n)) (D' := TTResult n)]

theorem taggedBind_unit :
  taggedBindScott (n := n)
    (taggedUnit (n := n) : ScottMap D (TTEnternalContinuationPower n D)) =
    ScottMap.idMap := by
  apply ScottMap.ext
  intro q
  funext i

```

```

have hcont :
  (evalBranch (C := TTContinuationPower n D) i).comp
    (taggedUnit (n := n) :
      ScottMap D (TTEExternalContinuationPower n D)) =
    (TTContinuation.unit (n := n) :
      ScottMap D (TTContinuationPower n D)) := by
  apply ScottMap.ext
  intro d
  rfl
change TTContinuation.bind _ (q i) = q i
rw [hcont]
exact congrArg (fun f : ScottMap (TTContinuationPower n D)
  (TTContinuationPower n D) => f (q i))
  (TTContinuation.bind_unit (n := n))

theorem taggedUnit_bind
  (h : ScottMap D (TTEExternalContinuationPower n E)) :
  (taggedBindScott (n := n) h).comp taggedUnit = h := by
  apply ScottMap.ext
  intro d
  funext i
  have hu := TTContinuation.unit_bind
    ((evalBranch (C := TTContinuationPower n E) i).comp h)
  exact congrArg (fun f : ScottMap D (TTContinuationPower n E) => f d) hu

/-- Selection commutes past bind of an external pairing of units when
the Kleisli map is coordinate-constant at those two values. -/
theorem selectBranch_taggedBind_extern_units
  (h : ScottMap D (TTEExternalContinuationPower n E))
  (vL vR : D)
  (hL : CoordinateConstant (h vL))
  (hR : CoordinateConstant (h vR))
  (b : Bool) :
  selectBranch b
    (taggedBindScott (n := n) h
      (externalChoice (taggedUnit (n := n) vL,
        taggedUnit (n := n) vR))) =
    taggedBindScott (n := n) h
      (selectBranch b
        (externalChoice (taggedUnit (n := n) vL,
          taggedUnit (n := n) vR))) := by
  have hunit (v : D) :
    taggedBindScott (n := n) h (taggedUnit (n := n) v) = h v :=
    congrArg (fun g : ScottMap D (TTEExternalContinuationPower n E) =>
      g v) (taggedUnit_bind (n := n) (E := E) h)
  cases b
  * rw [selectBranch_taggedBind, selectBranch_false_external]
    have hsel :
      taggedBindScott (n := n) ((selectBranch false).comp h)
        (taggedUnit (n := n) vL) =
        selectBranch false (h vL) :=
      congrArg (fun g : ScottMap D (TTEExternalContinuationPower n E) =>
        g vL) (taggedUnit_bind (n := n) (E := E)
          ((selectBranch false).comp h))
    rw [hsel, selectBranch_coordinateConstant_false_hL, hunit]
  * rw [selectBranch_taggedBind, selectBranch_true_external]
    have hsel :
      taggedBindScott (n := n) ((selectBranch true).comp h)
        (taggedUnit (n := n) vR) =
        selectBranch true (h vR) :=
      congrArg (fun g : ScottMap D (TTEExternalContinuationPower n E) =>
        g vR) (taggedUnit_bind (n := n) (E := E)
          ((selectBranch true).comp h))

```

```

    rw [hsel, selectBranch_coordinateConstant true hR, hunit]

theorem taggedBind_assoc
  (h : ScottMap D (TTEternalContinuationPower n E))
  (g : ScottMap E (TTEternalContinuationPower n F)) :
  (taggedBindScott (n := n) g).comp (taggedBindScott h) =
    taggedBindScott ((taggedBindScott g).comp h) := by
  apply ScottMap.ext
  intro q
  funext i
  let hi := (evalBranch (C := TTContinuationPower n E) i).comp h
  let gi := (evalBranch (C := TTContinuationPower n F) i).comp g
  have hassoc := TTContinuation.bind_assoc (n := n) hi gi
  have hinner :
    (evalBranch (C := TTContinuationPower n F) i).comp
      ((taggedBindScott (n := n) g).comp h) =
      (TTContinuation.bind gi).comp hi := by
  apply ScottMap.ext
  intro d
  rfl
  change TTContinuation.bind gi (TTContinuation.bind hi (q i)) =
    TTContinuation.bind _ (q i)
  rw [hinner]
  exact congrArg (fun f : ScottMap (TTContinuationPower n D)
    (TTContinuationPower n F) => f (q i)) hassoc

theorem taggedMap_eq_bind_unit (f : ScottMap D E) :
  taggedMap (n := n) f =
    taggedBindScott ((taggedUnit (n := n)).comp f) := by
  apply ScottMap.ext
  intro q
  funext i
  have hcont :
    (evalBranch (C := TTContinuationPower n E) i).comp
      ((taggedUnit (n := n)).comp f) =
      (TTContinuation.unit (n := n)).comp f := by
  apply ScottMap.ext
  intro d
  rfl
  change TTContinuation.map f (q i) =
    TTContinuation.bind _ (q i)
  rw [hcont]
  exact congrArg (fun m : ScottMap (TTContinuationPower n D)
    (TTContinuationPower n E) => m (q i))
    (TTContinuation.map_eq_bind_unit (n := n) f)

noncomputable instance instIsQuantumPowerModelTTEternal :
  IsQuantumPowerModel (TTEternalContinuationPower n) where
  str := fun _ => inferInstance
  map := fun f => taggedMap (n := n) f
  map_id := taggedMap_id (n := n)
  map_comp := taggedMap_comp (n := n)
  map_mono := taggedMap_mono (n := n)
  map_iSup := taggedMap_iSup (n := n)
  closed := by
    intro D _ hD
    let I : IsOmegaQVA D := hD
    let I : IsOmegaQVA (TTContinuationPower n D) :=
      IsQuantumPowerModel.closed (Q := TTContinuationPower n) hD
    exact omegaQVA_pi

noncomputable instance instIsQuantumMonadTTEternal :
  IsQuantumMonad (TTEternalContinuationPower n) where

```

```

unit := taggedUnit (n := n)
bind := taggedBindScott (n := n)
bind_unit := taggedBind_unit (n := n)
unit_bind := taggedUnit_bind (n := n)
bind_assoc := taggedBind_assoc (n := n)
map_eq_bind_unit := taggedMap_eq_bind_unit (n := n)

/-- The complete tagged TT model accepted by the interpreter. -/
noncomputable def externalModel (n : Nat) : QuantumPowerModel where
  Power := TTEExternalContinuationPower n

end TTContinuation

end QLambda

```

A.58 QLambda/TTInternalChoice.lean

108 lines.

Lean 4 source

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/
import QLambda.Effects
import QLambda.TTContinuationMonad

/-!
# Internal choice for TT continuations

This module implements only internal choice. It is pointwise join of TT
continuations, represented by `ScottMap.sup`; no probabilistic or external
operation, and hence no `HasComputationChoice` instance, is asserted here.
-/

namespace QLambda

open Scott1972.ContinuousLattice

universe u

namespace TTContinuation

variable {n : Nat}
variable {D E : Type u}
variable [CompleteLattice D] [CompleteLattice E]

private noncomputable def fstContinuation :
  ScottMap
    (TTContinuationPower n D x TTContinuationPower n D)
    (TTContinuationPower n D) :=
  <Prod.fst, continuous_of_preservesDirectedSup fun S _ =>
    Prod.fst_sSup S>

private noncomputable def sndContinuation :
  ScottMap
    (TTContinuationPower n D x TTContinuationPower n D)
    (TTContinuationPower n D) :=
  <Prod.snd, continuous_of_preservesDirectedSup fun S _ =>
    Prod.snd_sSup S>

```

```

/-- Internal choice of TT continuations is their pointwise `ScottMap.sup`. -/
noncomputable def internalChoice :
  ScottMap
    (TTContinuationPower n D x TTContinuationPower n D)
    (TTContinuationPower n D) :=
  ScottMap.sup fstContinuation sndContinuation

@[simp]
theorem internalChoice_eq_sup (q r : TTContinuationPower n D) :
  internalChoice (q, r) = q sqsup r := by
  rfl

/-- Applying an internal choice to a continuation joins the two results. -/
@[simp]
theorem internalChoice_apply (q r : TTContinuationPower n D)
  (k : ScottMap D (TTResult n)) :
  internalChoice (q, r) k = q k sqsup r k := by
  rw [internalChoice_eq_sup, ScottMap.sup_apply]

theorem le_internalChoice_left (q r : TTContinuationPower n D) :
  q <= internalChoice (q, r) := by
  rw [internalChoice_eq_sup]
  exact le_sup_left

theorem le_internalChoice_right (q r : TTContinuationPower n D) :
  r <= internalChoice (q, r) := by
  rw [internalChoice_eq_sup]
  exact le_sup_right

theorem internalChoice_comm (q r : TTContinuationPower n D) :
  internalChoice (q, r) = internalChoice (r, q) := by
  simp only [internalChoice_eq_sup, sup_comm]

theorem internalChoice_assoc (q r s : TTContinuationPower n D) :
  internalChoice (internalChoice (q, r), s) =
    internalChoice (q, internalChoice (r, s)) := by
  simp only [internalChoice_eq_sup, sup_assoc]

@[simp]
theorem internalChoice_idem (q : TTContinuationPower n D) :
  internalChoice (q, q) = q := by
  simp only [internalChoice_eq_sup, sup_idem]

@[simp]
theorem internalChoice_bot_left (q : TTContinuationPower n D) :
  internalChoice (False, q) = q := by
  simp only [internalChoice_eq_sup, bot_sup_eq]

@[simp]
theorem internalChoice_bot_right (q : TTContinuationPower n D) :
  internalChoice (q, False) = q := by
  simp only [internalChoice_eq_sup, sup_bot_eq]

/-- Kleisli extension preserves TT internal choice exactly in its computation
argument. -/
theorem bind_internalChoice (h : ScottMap D (TTContinuationPower n E))
  (q r : TTContinuationPower n D) :
  bind h (internalChoice (q, r)) =
    internalChoice (bind h q, bind h r) := by
  apply ScottMap.ext
  intro k
  simp only [bind_apply, internalChoice_apply]

```



```
end TTContinuation
```

```
end QLambda
```

A.59 QLambda/TTObservationBasis.lean

253 lines.

Lean 4 source

```
/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/
import QLambda.RationalCP

open Matrix
open scoped ComplexOrder MatrixOrder

namespace QLambda

universe u

/-- Raw finite data underlying a rational step postcondition. -/
abbrev RatStepPostData (n : Nat) :=
  Sigma k : Nat, (Fin k -> Nat) x ((Fin k -> Bool) -> RatTNICPMatrix n)

/-- A finite table of rational trace-nonincreasing CP codes indexed by the
Boolean signature of finitely many coded Scott opens. -/
structure RatStepPostCode (n : Nat) where
  arity : Nat
  opens : Fin arity -> Nat
  table : (Fin arity -> Bool) -> RatTNICPMatrix n
  table_mono : forall ?s t?,
    (forall i, @LE.le Bool Bool.instLE (s i) (t i)) ->
    (table s).toComplex <= (table t).toComplex

namespace RatStepPostCode

noncomputable instance (n : Nat) : Encodable (RatStepPostCode n) := by
  classical
  let valid (d : RatStepPostData n) : Prop :=
    forall ?s t?, (forall i, @LE.le Bool Bool.instLE (s i) (t i)) ->
    (d.2.2 s).toComplex <= (d.2.2 t).toComplex
  let e : RatStepPostCode n ? {d : RatStepPostData n // valid d} := {
    toFun c := <<c.arity, c.opens, c.table>, c.table_mono>
    invFun d := <d.1.1, d.1.2.1, d.1.2.2, d.2>
    left_inv _ := rfl
    right_inv _ := rfl }
  exact Encodable.ofEquiv _ e

instance (n : Nat) : Countable (RatStepPostCode n) :=
  Encodable.countable

/-- Constant rational identity postcondition. It has no output tests, so it
decodes to the identity channel for every output code and value. -/
noncomputable def identity (n : Nat) : RatStepPostCode n where
  arity := 0
  opens := Fin.elim0
  table := fun _ => RatTNICPMatrix.identity n
  table_mono := by
```

```

    intro s t hst
    exact le_rfl

/-- Boolean membership signature of a point against the finitely many
Scott opens selected by a step code. -/
noncomputable def signature {D : Type u} [CompleteLattice D]
  (C : OutputCode Nat D) (c : RatStepPostCode n) (d : D) :
  Fin c.arity -> Bool := by
  classical
  exact fun i => if d in C.observe (c.opens i) then true else false

theorem signature_mono {D : Type u} [CompleteLattice D]
  (C : OutputCode Nat D) (c : RatStepPostCode n) ?d e : D?
  (hde : d <= e) (i : Fin c.arity) :
  @LE.le Bool Bool.instLE (c.signature C d i) (c.signature C e i) := by
  classical
  by_cases hd : d in C.observe (c.opens i)
  * have he : e in C.observe (c.opens i) :=
    (C.observe (c.opens i)).isScottOpen.isUpperSet hde hd
  simp [signature, hd, he]
  * by_cases he : e in C.observe (c.opens i) <.>
    simp [signature, hd, he]

/-- Rational TNI code selected by the signature of `d`. -/
noncomputable def decodedTNI {D : Type u} [CompleteLattice D]
  (C : OutputCode Nat D) (c : RatStepPostCode n) (d : D) :
  RatTNICPMatrix n :=
  c.table (c.signature C d)

theorem decodedTNI_mono {D : Type u} [CompleteLattice D]
  (C : OutputCode Nat D) (c : RatStepPostCode n) ?d e : D? (hde : d <= e) :
  (c.decodedTNI C d).toComplex <= (c.decodedTNI C e).toComplex :=
  c.table_mono (fun i => c.signature_mono C hde i)

/-- The underlying rational CP matrix of the selected TNI code. This keeps
the pre-TNI matrix-level interface available to downstream proofs. -/
noncomputable def decodedMatrix {D : Type u} [CompleteLattice D]
  (C : OutputCode Nat D) (c : RatStepPostCode n) (d : D) :
  RatCPMatrix n :=
  (c.decodedTNI C d).cp

theorem decodedMatrix_mono {D : Type u} [CompleteLattice D]
  (C : OutputCode Nat D) (c : RatStepPostCode n) ?d e : D? (hde : d <= e) :
  (c.decodedMatrix C d).toComplex <= (c.decodedMatrix C e).toComplex :=
  c.decodedTNI_mono C hde

/-- Physical quantum operation selected at `d`. -/
noncomputable def decodedOperation {D : Type u} [CompleteLattice D]
  (C : OutputCode Nat D) (c : RatStepPostCode n) (d : D) :
  QuantumOperation n n :=
  (c.decodedTNI C d).toQuantumOperation

/-- Kraus realization of the rational matrix selected at `d`. -/
noncomputable def decodedKraus {D : Type u} [CompleteLattice D]
  (C : OutputCode Nat D) (c : RatStepPostCode n) (d : D) :
  KrausFamily n n :=
  (c.decodedOperation C d).kraus

@[simp] theorem choi_decodedKraus {D : Type u} [CompleteLattice D]
  (C : OutputCode Nat D) (c : RatStepPostCode n) (d : D) :
  KrausFamily.choi (c.decodedKraus C d) =
  (c.decodedMatrix C d).toComplex :=
  RatTNICPMatrix.choi_realize _

```

```

theorem choi_decodedKraus_tni {D : Type u} [CompleteLattice D]
  (C : OutputCode Nat D) (c : RatStepPostCode n) (d : D) :
  KrausFamily.choi (c.decodedKraus C d) =
    (c.decodedTNI C d).toComplex :=
  RatTNICPMatrix.choi_realize _

theorem decodedKraus_mono {D : Type u} [CompleteLattice D]
  (C : OutputCode Nat D) (c : RatStepPostCode n) ?d e : D? (hde : d <= e) :
  KrausFamily.Refines (c.decodedKraus C d) (c.decodedKraus C e) :=
  RatTNICPMatrix.realize_refines (c.decodedTNI_mono C hde)

theorem decodedKraus_trace_nonincreasing
  {D : Type u} [CompleteLattice D]
  (C : OutputCode Nat D) (c : RatStepPostCode n) (d : D) :
  forall ? : Matrix (Fin n) (Fin n) ?, ?.PosSemidef ->
    (Matrix.trace (KrausFamily.applyMat (c.decodedKraus C d) ?)).re <=
      (Matrix.trace ?).re :=
  (c.decodedOperation C d).trace_nonincreasing

/-- Decode a finite rational TNI step table as a monotone Kraus
postcondition. Its values are the Kraus families of physical quantum
operations; `FiniteInstrumentComp.Refines` remains the legacy quantification
over all monotone Kraus postconditions. -/
noncomputable def decode {D : Type u} [CompleteLattice D]
  (C : OutputCode Nat D) (c : RatStepPostCode n) :
  FiniteInstrumentComp.KrausPost n D where
  pred := c.decodedKraus C
  mono := c.decodedKraus_mono C

@[simp] theorem decode_apply {D : Type u} [CompleteLattice D]
  (C : OutputCode Nat D) (c : RatStepPostCode n) (d : D) :
  c.decode C d = c.decodedKraus C d :=
  rfl

/-- Every Kraus value supplied by a decoded step postcondition is
trace-nonincreasing. -/
theorem decode_trace_nonincreasing {D : Type u} [CompleteLattice D]
  (C : OutputCode Nat D) (c : RatStepPostCode n) (d : D) :
  forall ? : Matrix (Fin n) (Fin n) ?, ?.PosSemidef ->
    (Matrix.trace (KrausFamily.applyMat (c.decode C d) ?)).re <=
      (Matrix.trace ?).re :=
  c.decodedKraus_trace_nonincreasing C d

theorem decode_identity_semEq {D : Type u} [CompleteLattice D]
  (C : OutputCode Nat D) (d : D) :
  KrausFamily.SemEq ((identity n).decode C d)
    (KrausFamily.identity n) := by
  change KrausFamily.SemEq (RatTNICPMatrix.identity n).realize
    (KrausFamily.identity n)
  exact RatTNICPMatrix.realize_identity_semEq n

end RatStepPostCode

/-- A TT observation tests the weakest precondition induced by one
finite rational step postcondition. -/
structure TTObservationAtom (n : Nat) where
  post : RatStepPostCode n
  choi : ChoiTest n

namespace TTObservationAtom

noncomputable instance (n : Nat) : Encodable (TTObservationAtom n) :=

```

```

    Encodable.ofEquiv (RatStepPostCode n x ChoiTest n) {
      toFun a := (a.post, a.choi)
      invFun a := <a.1, a.2>
      left_inv _ := rfl
      right_inv _ := rfl }

instance (n : Nat) : Countable (TTObservationAtom n) :=
  Encodable.countable

/-- Satisfaction by strict quadratic evaluation of the Choi matrix of
the decoded weakest precondition. -/
def Holds {D : Type u} [CompleteLattice D] (C : OutputCode Nat D)
  (a : TTObservationAtom n) (? : FiniteInstrumentComp n D) : Prop :=
  a.choi.threshold <
    a.choi.eval (KrausFamily.choi (? wpKraus (a.post.decode C)))

theorem eval_nonneg {D : Type u} [CompleteLattice D] (C : OutputCode Nat D)
  (a : TTObservationAtom n) (? : FiniteInstrumentComp n D) :
  0 <= a.choi.eval (KrausFamily.choi (? wpKraus (a.post.decode C))) :=
  a.choi.eval_nonneg (KrausFamily.choi_posSemidef _)

theorem holds_of_threshold_le {D : Type u} [CompleteLattice D]
  (C : OutputCode Nat D) {a b : TTObservationAtom n}
  (hpost : a.post = b.post) (hvec : a.choi.1 = b.choi.1)
  (hthreshold : a.choi.threshold <= b.choi.threshold)
  {? : FiniteInstrumentComp n D} (h? : Holds C b ?) :
  Holds C a ? := by
  have heval :
    b.choi.eval (KrausFamily.choi (? wpKraus (b.post.decode C))) =
      a.choi.eval (KrausFamily.choi (? wpKraus (a.post.decode C))) := by
    simp only [ChoiTest.eval, ChoiTest.vector]
    rw [ <- hpost, <- hvec ]
  exact hthreshold.trans_lt (h?.trans_eq heval)

theorem holds_mono {D : Type u} [CompleteLattice D]
  (C : OutputCode Nat D) {? ? : FiniteInstrumentComp n D}
  (h?? : ? <= ?) {a : TTObservationAtom n} (ha : Holds C a ?) :
  Holds C a ? := by
  apply ha.trans_le
  apply a.choi.eval_mono
  exact KrausFamily.choiRefines_of_residualRefines (h?? (a.post.decode C))

end TTObservationAtom

/-- Finite conjunctions of rational TT observation atoms. -/
abbrev TTObservationToken (n : Nat) :=
  List (TTObservationAtom n)

noncomputable instance (n : Nat) : Encodable (TTObservationToken n) :=
  inferInstance

instance (n : Nat) : Countable (TTObservationToken n) :=
  Encodable.countable

namespace TTObservationToken

def Holds {D : Type u} [CompleteLattice D] (C : OutputCode Nat D)
  (t : TTObservationToken n) (? : FiniteInstrumentComp n D) : Prop :=
  forall a in t, a.Holds C ?

theorem nil_holds {D : Type u} [CompleteLattice D]
  (C : OutputCode Nat D) (? : FiniteInstrumentComp n D) :
  Holds C [] ? := by

```

```

simp [Holds]

theorem holds_mono {D : Type u} [CompleteLattice D]
  (C : OutputCode Nat D) {? ? : FiniteInstrumentComp n D}
  (h?? : ? <= ?) {t : TTObservationToken n} (ht : Holds C t ?) :
  Holds C t ? := by
  intro a ha
  exact TTObservationAtom.holds_mono C h?? (ht a ha)

end TTObservationToken

end QLambda

```

A.60 QLambda/TTPhysicalEmbedding.lean

729 lines.

Lean 4 source (lines 1–400)

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/
import QLambda.TTExternalChoice
import QLambda.TTResultOperations

namespace QLambda

open Scott1972.ContinuousLattice

universe u

namespace TTPhysicalEmbedding

variable {n : Nat} {D E : Type u}
variable [CompleteLattice D] [CompleteLattice E]

/-- Embed a finite physical instrument into the continuation model by
aggregating finite branch-local result observations. -/
noncomputable def embed (? : FiniteInstrumentComp n D) :
  TTContinuation.TTContinuationPower n D :=
  TTTOKENTheory.bindResultScott ?

@[simp]
theorem embed_apply (? : FiniteInstrumentComp n D)
  (k : Scott1972.ContinuousLattice.ScottMap D
    (TTContinuation.TTResult n)) :
  embed ? k = TTTOKENTheory.aggregateResult ? k :=
  rfl

/-- On a continuation represented by finite result instruments at every
returned value of `?`, the embedding computes physical finite bind exactly. -/
theorem embed_satisfied
  (? : FiniteInstrumentComp n D)
  (? : D -> FiniteInstrumentComp n PUnit.{1})
  (k : Scott1972.ContinuousLattice.ScottMap D
    (TTContinuation.TTResult n))
  (hk : forall o : ?.Outcome,
    k (? .value o) =
    (? (? .value o)).satisfiedTTTheory TTContinuation.resultCode) :
  embed ? k =
    (? .bind ?).satisfiedTTTheory TTContinuation.resultCode :=

```

```

TTTokenTheory.bindResultScott_satisfied ? ? k hk

/-- A source-code test represented inside the result continuation model.

The Scott postcondition is finitely presented pointwise, and `probe` recovers
the original source weakest precondition after finite bind. Every rational
step code receives such a representation below. -/
structure CodedTestRepresentation
  (C : OutputCode Nat D) (c : RatStepPostCode n) where
  post : ScottMap D (TTContinuation.TTResult n)
  result : D -> FiniteInstrumentComp n PUnit.{1}
  post_eq : forall d,
    post d = (result d).satisfiedTTTheory TTContinuation.resultCode
  probe : RatStepPostCode n
  wp_semEq : forall ? : FiniteInstrumentComp n D,
    KrausFamily.SemEq
      ((?.bind result).wpKraus
        (probe.decode TTContinuation.resultCode))
      (?.wpKraus (c.decode C))

/-- The finite result instrument which realizes one value of a coded source
postcondition. -/
noncomputable def codedResult
  (C : OutputCode Nat D) (c : RatStepPostCode n) (d : D) :
  FiniteInstrumentComp n PUnit.{1} :=
  FiniteInstrumentComp.ofOperation (c.decodedOperation C d) PUnit.unit

theorem codedResult_wp_identity
  (C : OutputCode Nat D) (c : RatStepPostCode n) (d : D) :
  KrausFamily.SemEq
    ((codedResult C c d).wpKraus
      ((RatStepPostCode.identity n).decode
        TTContinuation.resultCode))
    (c.decode C d) := by
  apply KrausFamily.applySemEq_trans
    (FiniteInstrumentComp.wpKraus_ofOperation_semEq
      (c.decodedOperation C d) PUnit.unit
      ((RatStepPostCode.identity n).decode
        TTContinuation.resultCode))
  intro ?
  rw [KrausFamily.applyMat_comp]
  have hid := RatStepPostCode.decode_identity_semEq
    (n := n) TTContinuation.resultCode PUnit.unit
  rw [hid]
  exact KrausFamily.applyMat_identity _

/-- The finite table underlying a coded postcondition yields a
Scott-continuous family of represented result theories. At a directed
supremum, all finitely many open-membership bits are already attained at one
member of the directed set. -/
noncomputable def codedPost
  (C : OutputCode Nat D) (c : RatStepPostCode n) :
  ScottMap D (TTContinuation.TTResult n) :=
  <fun d => (codedResult C c d).satisfiedTTTheory
    TTContinuation.resultCode,
  continuous_of_preservesDirectedSup fun S hS hdir => by
  apply RoundedTheory.ext
  ext t
  change
    t in (codedResult C c (sSup S)).satisfiedTTTheory
      TTContinuation.resultCode <->
    t in (sSup
      ((fun d =>

```

```

      (codedResult C c d).satisfiedTTTheory
      TTContinuation.resultCode) '' S) :
      TTContinuation.TTResult n)
rw [RoundedTheory.mem_sSup]
constructor
* intro ht
  obtain <d, hdS, hsig> :=
    c.exists_signature_eq_of_directed C hS hdir
  have hop :
    c.decodedOperation C d =
      c.decodedOperation C (sSup S) := by
        unfold RatStepPostCode.decodedOperation
        RatStepPostCode.decodedTNI
  rw [hsig]
  refine <(codedResult C c d).satisfiedTTTheory
    TTContinuation.resultCode, <d, hdS, rfl>, ?_>
  simpa [codedResult, hop] using ht
* rintro <_, <d, hdS, rfl>, ht>
  apply TTObservationToken.holds_mono
  TTContinuation.resultCode ?_ ht
  intro P
  exact KrausFamily.residualRefines_trans
    (KrausFamily.residualRefines_of_semEq
      (FiniteInstrumentComp.wpKraus_ofOperation_semEq
        (c.decodedOperation C d) PUnit.unit P))
    (KrausFamily.residualRefines_trans
      (KrausFamily.residualRefines_comp_left (P PUnit.unit)
        (c.decodedKraus_mono C (le_sSup hdS)))
      (KrausFamily.residualRefines_of_semEq
        (KrausFamily.applySemEq_symm
          (FiniteInstrumentComp.wpKraus_ofOperation_semEq
            (c.decodedOperation C (sSup S)) PUnit.unit P))))))>

@[simp]
theorem codedPost_apply
  (C : OutputCode Nat D) (c : RatStepPostCode n) (d : D) :
  codedPost C c d =
    (codedResult C c d).satisfiedTTTheory
    TTContinuation.resultCode :=
  rfl

/-- Every rational source test has a finite result representation. -/
noncomputable def codedTestRepresentation
  (C : OutputCode Nat D) (c : RatStepPostCode n) :
  CodedTestRepresentation C c where
  post := codedPost C c
  result := codedResult C c
  post_eq := codedPost_apply C c
  probe := RatStepPostCode.identity n
  wp_semEq := fun ? =>
    KrausFamily.applySemEq_trans
      (FiniteInstrumentComp.wpKraus_bind_semEq ?
        (codedResult C c)
        ((RatStepPostCode.identity n).decode
          TTContinuation.resultCode))
      (FiniteInstrumentComp.wpKraus_semEq_pred ?
        (codedResult_wp_identity C c))

/-- Order between physical embeddings preserves every source-code test that
has an explicit Scott representation in the result model. -/
theorem finitaryTTRefines_test_of_embed_le
  (C : OutputCode Nat D) {? ? : FiniteInstrumentComp n D}
  (h?? : embed ? <= embed ?) (c : RatStepPostCode n)

```

```

(R : CodedTestRepresentation C c) :
KrausFamily.Refines
  (? wpKraus (c.decode C)) (? wpKraus (c.decode C)) := by
have htheory :
  (? bind R.result).satisfiedTTTheory TTContinuation.resultCode <=
    (? bind R.result).satisfiedTTTheory TTContinuation.resultCode := by
calc
  (? bind R.result).satisfiedTTTheory TTContinuation.resultCode =
    embed ? R.post := by
    symm
    exact embed_satisfied ? R.result R.post fun o =>
      R.post_eq (? value o)
  _ <= embed ? R.post := h?? R.post
  _ = (? bind R.result).satisfiedTTTheory
    TTContinuation.resultCode := by
    exact embed_satisfied ? R.result R.post fun o =>
      R.post_eq (? value o)
have hprobe :
  KrausFamily.Refines
    ((? bind R.result).wpKraus
      (R.probe.decode TTContinuation.resultCode))
    ((? bind R.result).wpKraus
      (R.probe.decode TTContinuation.resultCode)) :=
  ((FiniteInstrumentComp.satisfiedTTTheory_le_iff_finitaryTTRefines
    TTContinuation.resultCode).1 htheory) R.probe
exact KrausFamily.residualRefines_trans
  (KrausFamily.residualRefines_of_semEq
    (KrausFamily.applySemEq_symm (R.wp_semEq ?)))
  (KrausFamily.residualRefines_trans hprobe
    (KrausFamily.residualRefines_of_semEq (R.wp_semEq ?)))

/-- Embedding order implies unconditional finitary TT refinement. The
representation is constructed above from the finite signature table of each
rational test. -/
theorem finitaryTTRefines_of_embed_le
  (C : OutputCode Nat D) {? ? : FiniteInstrumentComp n D}
  (h?? : embed ? <= embed ?) :
  FiniteInstrumentComp.FinitaryTTRefines C ? ? :=
fun c => finitaryTTRefines_test_of_embed_le C h?? c
  (codedTestRepresentation C c)

private theorem satisfiedTTTheory_eq_of_wpKraus_semEq
  {? ? : FiniteInstrumentComp n PUnit.{1}}
  (h : forall P : PUnit.{1} -> KrausFamily n n,
    KrausFamily.SemEq (? wpKraus P) (? wpKraus P)) :
  ?.satisfiedTTTheory TTContinuation.resultCode =
  ?.satisfiedTTTheory TTContinuation.resultCode := by
apply (FiniteInstrumentComp.satisfiedTTTheory_eq_iff_mutual_finitaryTTRefines
  TTContinuation.resultCode).2
constructor
* intro c
  exact KrausFamily.residualRefines_of_semEq
    (h (c.decode TTContinuation.resultCode))
* intro c
  exact KrausFamily.residualRefines_of_semEq
    (KrausFamily.applySemEq_symm
      (h (c.decode TTContinuation.resultCode)))

/-- The physical embedding preserves deterministic return exactly. -/
theorem embed_unit (d : D) :
  embed (FiniteInstrumentComp.unit (n := n) d) =
  TTContinuation.unit (n := n) d := by
  apply ScottMap.ext

```



```

intro k
apply RoundedTheory.ext
ext t
let B := TTObservationToken.roundedBasis
  (n := n) TTContinuation.resultCode
constructor
* intro ht
  obtain <sources, hsources, target, hderives, httarget> :=
    (TTTokenTheory.mem_aggregateResult
      (FiniteInstrumentComp.unit (n := n) d) k t).mp ht
  let s := sources Unit.unit
  have hs : s in k d := hsources Unit.unit
  have hsrnd : s in RoundedTheory.round B (k d).carrier := by
    rw [(k d).rounded]
    exact hs
  obtain <s', hs'k, hss'> := hsrnd
  have htarg_s :
    TTObservationToken.Entails TTContinuation.resultCode target s := by
    intro ? hs?
    let ? : D -> FiniteInstrumentComp n PUnit.{1} := fun _ => ?
    have hbind : TTObservationToken.Holds TTContinuation.resultCode target
      ((FiniteInstrumentComp.unit (n := n) d).bind ?) := by
      apply hderives ?
      intro o
      rcases o with <>
      exact hs?
    have heq :
      ((FiniteInstrumentComp.unit (n := n) d).bind ?).satisfiedTTTheory
        TTContinuation.resultCode =
        ?.satisfiedTTTheory TTContinuation.resultCode := by
      apply satisfiedTTTheory_eq_of_wpKraus_semEq
      intro P
      exact KrausFamily.applySemEq_trans
        (FiniteInstrumentComp.wpKraus_bind_semEq
          (FiniteInstrumentComp.unit (n := n) d) ? P)
        (FiniteInstrumentComp.wpKraus_unit_semEq d
          fun x => (? x).wpKraus P)
      apply (FiniteInstrumentComp.mem_satisfiedTTTheory
        TTContinuation.resultCode ? target).mp
    rw [← heq]
    exact (FiniteInstrumentComp.mem_satisfiedTTTheory
      TTContinuation.resultCode
      ((FiniteInstrumentComp.unit (n := n) d).bind ?) target).2 hbind
  have hts' :
    TTObservationToken.RoundedBelow
      TTContinuation.resultCode t s' := by
    obtain <v, hsv, hvs'> := hss'
    exact <v,
      TTObservationToken.entails_trans TTContinuation.resultCode
        (TTObservationToken.roundedBelow_entails
          TTContinuation.resultCode httarget)
        (TTObservationToken.entails_trans TTContinuation.resultCode
          htarg_s hsv),
      hvs'>
  have htrnd : t in RoundedTheory.round B (k d).carrier :=
    <s', hs'k, hts'>
  rw [(k d).rounded] at htrnd
  exact htrnd
* intro ht
  have htrnd : t in RoundedTheory.round B (k d).carrier := by
    rw [(k d).rounded]
    exact ht
  obtain <target, htargtk, httarget> := htrnd

```

```

let sources :
  (FiniteInstrumentComp.unit (n := n) d).Outcome ->
  TTObservationToken n :=
  fun _ => target
apply (TTTokenTheory.mem_aggregateResult
  (FiniteInstrumentComp.unit (n := n) d) k t).2
refine <sources, ?_, target, ?_, httarget>
* intro o
  rcases o with <>
  exact htarggetk
* intro ? hsources
  have h? : TTObservationToken.Holds TTContinuation.resultCode target
    (? d) := hsources Unit.unit
  have heq :
    ((FiniteInstrumentComp.unit (n := n) d).bind ?).satisfiedTTTheory
      TTContinuation.resultCode =
    (? d).satisfiedTTTheory TTContinuation.resultCode := by
    apply satisfiedTTTheory_eq_of_wpKraus_semEq
    intro P
    exact KrausFamily.applySemEq_trans
      (FiniteInstrumentComp.wpKraus_bind_semEq
        (FiniteInstrumentComp.unit (n := n) d) ? P)
      (FiniteInstrumentComp.wpKraus_unit_semEq d
        fun x => (? x).wpKraus P)
    apply (FiniteInstrumentComp.mem_satisfiedTTTheory
      TTContinuation.resultCode
      ((FiniteInstrumentComp.unit (n := n) d).bind ?) target).mp
  rw [heq]
  exact (FiniteInstrumentComp.mem_satisfiedTTTheory
    TTContinuation.resultCode (? d) target).2 h?

/-- Right unit in the continuation model, specialized to an embedded
finite instrument. -/
theorem embed_bind_unit (? : FiniteInstrumentComp n D) :
  TTContinuation.bind
    (TTContinuation.unit (n := n) :
      ScottMap D (TTContinuation.TTContinuationPower n D))
    (embed ?) =
  embed ? := by
  have h := TTContinuation.bind_unit (n := n) (D := D)
  exact congrArg (fun F => F (embed ?)) h

/-- Left unit in the continuation model, using exact preservation of
finite deterministic return. -/
theorem embed_unit_bind
  (d : D)
  (h : ScottMap D (TTContinuation.TTContinuationPower n E)) :
  TTContinuation.bind h
    (embed (FiniteInstrumentComp.unit (n := n) d)) =
  h d := by
  rw [embed_unit]
  exact congrArg (fun q : ScottMap D
    (TTContinuation.TTContinuationPower n E) => q d)
    (TTContinuation.unit_bind h)

/-- The physical embedding agrees with continuation return whenever the
result continuation at the returned value has a finite presentation. -/
theorem embed_unit_satisfied
  (d : D) (? : FiniteInstrumentComp n PUnit.{1})
  (k : ScottMap D (TTContinuation.TTResult n))
  (hk : k d = ?.satisfiedTTTheory TTContinuation.resultCode) :
  embed (FiniteInstrumentComp.unit (n := n) d) k =
  TTContinuation.unit (n := n) d k := by

```

```

let ? : D -> FiniteInstrumentComp n PUnit.{1} := fun _ => ?
calc
  embed (FiniteInstrumentComp.unit (n := n) d) k =
    ((FiniteInstrumentComp.unit (n := n) d).bind ?).satisfiedTTTheory
    TTContinuation.resultCode := by
  apply embed_satisfied
  intro o
  rcases o with <>
  exact hk
_ = ?.satisfiedTTTheory TTContinuation.resultCode := by
  apply satisfiedTTTheory_eq_of_wpKraus_semEq
  intro P
  exact KrausFamily.applySemEq_trans
    (FiniteInstrumentComp.wpKraus_bind_semEq
      (FiniteInstrumentComp.unit (n := n) d) ? P)
    (FiniteInstrumentComp.wpKraus_unit_semEq d
      fun x => (? x).wpKraus P)
_ = k d := hk.symm
_ = TTContinuation.unit (n := n) d k := rfl

/-- Finite functor compatibility on finitely presented result
continuations. -/
theorem embed_map_satisfied
  (g : ScottMap D E) (? : FiniteInstrumentComp n D)
  (? : E -> FiniteInstrumentComp n PUnit.{1})
  (k : ScottMap E (TTContinuation.TTResult n))
  (hk : forall o : (? .map g).Outcome,
    k ((? .map g).value o) =
      (? ((? .map g).value o)).satisfiedTTTheory
      TTContinuation.resultCode) :
  TTContinuation.map g (embed ?) k =
    embed (? .map g) k := by
  have hsource (o : ?.Outcome) :
    (k.comp g) (? .value o) =
      (? (g (? .value o))).satisfiedTTTheory
      TTContinuation.resultCode := by
    exact hk o
  calc
    TTContinuation.map g (embed ?) k = embed ? (k.comp g) := rfl
    _ = (? .bind fun d => ? (g d)).satisfiedTTTheory
      TTContinuation.resultCode := by

```

Lean 4 source (lines 401–729)

```

  exact embed_satisfied ? (fun d => ? (g d)) (k.comp g) hsource
_ = ((? .map g).bind ?).satisfiedTTTheory
  TTContinuation.resultCode := by
  apply satisfiedTTTheory_eq_of_wpKraus_semEq
  intro P
  have hright :=
    FiniteInstrumentComp.wpKraus_bind_semEq (? .map g) ? P
  rw [FiniteInstrumentComp.wpKraus_map] at hright
  exact KrausFamily.applySemEq_trans
    (FiniteInstrumentComp.wpKraus_bind_semEq ? (fun d => ? (g d)) P)
    (KrausFamily.applySemEq_symm hright)
_ = embed (? .map g) k := by
  exact (embed_satisfied (? .map g) ? k hk).symm

/-- Finite Kleisli compatibility on finitely presented result
continuations. The Scott map `h` need only agree with the embedded finite
continuation at the values returned by `?`. -/
theorem embed_bind_satisfied
  (? : FiniteInstrumentComp n D)
  (f : D -> FiniteInstrumentComp n E)

```

```

(h : ScottMap D (TTContinuation.TTContinuationPower n E))
(hh : forall o : ?.Outcome, h (?.value o) = embed (f (?.value o)))
(?. : E -> FiniteInstrumentComp n PUnit.{1})
(k : ScottMap E (TTContinuation.TTResult n))
(hk : forall p : (?.bind f).Outcome,
  k ((?.bind f).value p) =
    (?. ((?.bind f).value p)).satisfiedTTTheory
      TTContinuation.resultCode) :
TTContinuation.bind h (embed ?) k =
  embed (?.bind f) k := by
have hinner (o : ?.Outcome) :
  TTContinuation.continuation h k (?.value o) =
    ((f (?.value o)).bind ?).satisfiedTTTheory
      TTContinuation.resultCode := by
rw [TTContinuation.continuation_apply, hh o]
apply embed_satisfied
intro q
exact hk <o, q>
calc
TTContinuation.bind h (embed ?) k =
  embed ? (TTContinuation.continuation h k) := rfl
_ = (?.bind fun d => (f d).bind ?).satisfiedTTTheory
  TTContinuation.resultCode := by
exact embed_satisfied ? (fun d => (f d).bind ?)
  (TTContinuation.continuation h k) hinner
_ = ((?.bind f).bind ?).satisfiedTTTheory
  TTContinuation.resultCode := by
apply satisfiedTTTheory_eq_of_wpKraus_semEq
intro P
apply KrausFamily.applySemEq_symm
exact KrausFamily.applySemEq_trans
  (FiniteInstrumentComp.wpKraus_bind_semEq (?.bind f) ? P)
  (KrausFamily.applySemEq_trans
    (FiniteInstrumentComp.wpKraus_bind_semEq ? f
      fun e => (? e).wpKraus P)
    (KrausFamily.applySemEq_trans
      (FiniteInstrumentComp.wpKraus_semEq_pred ? fun d =>
        KrausFamily.applySemEq_symm
          (FiniteInstrumentComp.wpKraus_bind_semEq (f d) ? P))
      (KrausFamily.applySemEq_symm
        (FiniteInstrumentComp.wpKraus_bind_semEq ?
          (fun d => (f d).bind ? P))))))
_ = embed (?.bind f) k := by
exact (embed_satisfied (?.bind f) ? k hk).symm

/-! ## Compatibility with the complete tagged model -/

/-- A finite physical computation represented at every branch-tree
coordinate. Physical primitives introduce no unresolved external branch. -/
noncomputable def taggedEmbed (? : FiniteInstrumentComp n D) :
  TTContinuation.TTExternalContinuationPower n D :=
  fun _ => embed ?

@[simp]
theorem taggedEmbed_apply (? : FiniteInstrumentComp n D) (i : Nat)
  (k : ScottMap D (TTContinuation.TTResult n)) :
  taggedEmbed ? i k = embed ? k :=
  rfl

/-- Tagged physical return agrees exactly with the reader-transformer unit. -/
theorem taggedEmbed_unit (d : D) :
  taggedEmbed (FiniteInstrumentComp.unit (n := n) d) =
    TTContinuation.taggedUnit (n := n) d := by

```

```

funext i
exact embed_unit d

/-- Represented-continuation compatibility for tagged Kleisli extension.
The finite presentation condition is the exact boundary inherited from
`embed_bind_satisfied`; no density or finite-image retraction is assumed. -/
theorem taggedEmbed_bind_satisfied
  (? : FiniteInstrumentComp n D)
  (f : D -> FiniteInstrumentComp n E)
  (h : ScottMap D (TTContinuation.TTExternalContinuationPower n E))
  (hh : forall o : ?.Outcome, h (? .value o) = taggedEmbed (f (? .value o)))
  (? : E -> FiniteInstrumentComp n PUnit.{1})
  (k : ScottMap E (TTContinuation.TTResult n))
  (hk : forall p : (? .bind f).Outcome,
    k ((? .bind f).value p) =
      (? ((? .bind f).value p)).satisfiedTTTheory
        TTContinuation.resultCode)
  (i : Nat) :
  TTContinuation.taggedBindScott h (taggedEmbed ?) i k =
    taggedEmbed (? .bind f) i k := by
let hi : ScottMap D (TTContinuation.TTContinuationPower n E) :=
  <fun d => h d i, continuous_of_preservesDirectedSup fun S hS hdir => by
    have hs := h.preservesDirectedSup_coe S hS hdir
    have hsi := congrArg (fun q => q i) hs
    rw [sSup_apply_eq_sSup_image] at hsi
    simpa only [Set.image_image] using hsi>
change TTContinuation.bind hi (embed ?) k = embed (? .bind f) k
apply embed_bind_satisfied ? f hi
* intro o
  exact congrArg (fun q => q i) (hh o)
* exact hk

/-- Physical embedding is invariant under outcome reindexing that preserves
branches and returned values. -/
theorem embed_congr_of_outcome_equiv
  (?? : FiniteInstrumentComp n D)
  (e : ?.Outcome ?? .Outcome)
  (hbranch : forall o, ?.branch (e o) = ?.branch o)
  (hvalue : forall o, ?.value (e o) = ?.value o) :
  embed ? = embed ? := by
apply ScottMap.ext
intro k
apply RoundedTheory.ext
ext t
constructor
* intro ht
  obtain <sources, hsources, target, hderives, httarget> :=
    (TTTokenTheory.mem_aggregateResult ? k t).mp ht
  let sources' : ?.Outcome -> TTObservationToken n :=
    fun q => sources (e.symm q)
  apply (TTTokenTheory.mem_aggregateResult ? k t).2
  refine <sources', ?_, target, ?_, httarget>
* intro q
  have hq : ?.value q = ?.value (e.symm q) := by
    simpa using hvalue (e.symm q)
  simpa [sources', hq] using hsources (e.symm q)
* intro ? h?
  have h? :
    TTObservationToken.Holds TTContinuation.resultCode
      target (? .bind ?) := by
    apply hderives ?
    intro o
    have ho : ?.value (e o) = ?.value o := hvalue o

```

```

      simpa [sources', ho] using h? (e o)
have hthy :
  (?.bind ?).satisfiedTTTheory TTContinuation.resultCode =
    (?.bind ?).satisfiedTTTheory TTContinuation.resultCode :=
      satisfiedTTTheory_eq_of_wpKraus_semEq
    (fun P => FiniteInstrumentComp.bind_wpKraus_congr_of_outcome_equiv
      ? ? e hbranch hvalue ? P)
exact (FiniteInstrumentComp.mem_satisfiedTTTheory
  TTContinuation.resultCode (?.bind ?) target).mp
(hthy |>
  (FiniteInstrumentComp.mem_satisfiedTTTheory
    TTContinuation.resultCode (?.bind ?) target).2 h?)
* intro ht
obtain <sources, hsources, target, hderives, httarget> :=
  (TTTokenTheory.mem_aggregateResult ? k t).mp ht
let sources' : ?.Outcome -> TTObservationToken n :=
  fun o => sources (e o)
apply (TTTokenTheory.mem_aggregateResult ? k t).2
refine <sources', ?_, target, ?_, httarget>
* intro o
  simpa [sources', hvalue o] using hsources (e o)
* intro ? h?
  have h? :
    TTObservationToken.Holds TTContinuation.resultCode
      target (?.bind ?) := by
      apply hderives ?
      intro q
      have hq : ?.value q = ?.value (e.symm q) := by
        simpa using hvalue (e.symm q)
      simpa [sources', hq] using h? (e.symm q)
  have hthy :
    (?.bind ?).satisfiedTTTheory TTContinuation.resultCode =
      (?.bind ?).satisfiedTTTheory TTContinuation.resultCode :=
        satisfiedTTTheory_eq_of_wpKraus_semEq
      (fun P => FiniteInstrumentComp.bind_wpKraus_congr_of_outcome_equiv
        ? ? e hbranch hvalue ? P)
  exact (FiniteInstrumentComp.mem_satisfiedTTTheory
    TTContinuation.resultCode (?.bind ?) target).mp
  (hthy.symm |>
    (FiniteInstrumentComp.mem_satisfiedTTTheory
      TTContinuation.resultCode (?.bind ?) target).2 h?)

/-- A one-outcome identity instrument embeds as deterministic return. -/
theorem embed_eq_unit_of_unique
  (? : FiniteInstrumentComp n D) [Unique ?.Outcome]
  (d : D)
  (hvalue : forall o, ?.value o = d)
  (hbranch : forall o, ?.branch o = KrausFamily.identity n) :
  embed ? = embed (FiniteInstrumentComp.unit (n := n) d) :=
  embed_congr_of_outcome_equiv ?
  (FiniteInstrumentComp.unit (n := n) d)
  { toFun := fun _ => ()
    invFun := fun _ => default
    left_inv := fun o => (Unique.uniq _ o).symm
    right_inv := fun _ => rfl }
  (fun o => by
    change KrausFamily.identity n = ?.branch o
    exact (hbranch o).symm)
  (fun o => by
    change d = ?.value o
    exact (hvalue o).symm)

/-- A one-outcome operation instrument embeds as `ofOperation`. -/

```

```

theorem embed_eq_ofOperation_of_unique
  (? : FiniteInstrumentComp n D) [Unique ?.Outcome]
  (? : QuantumOperation n n) (d : D)
  (hvalue : forall o, ?.value o = d)
  (hbranch : forall o, ?.branch o = ?.kraus) :
  embed ? = embed (FiniteInstrumentComp.ofOperation ? d) :=
embed_congr_of_outcome_equiv ?
  (FiniteInstrumentComp.ofOperation ? d)
  { toFun := fun _ => ()
    invFun := fun _ => default
    left_inv := fun o => (Unique.uniq _ o).symm
    right_inv := fun _ => rfl }
  (fun o => by
    change ?.kraus = ?.branch o
    exact (hbranch o).symm)
  (fun o => by
    change d = ?.value o
    exact (hvalue o).symm)

/-! ## Monotonicity for support-coupled extensions -/

/-- A finite extension is monotone in the TT embedding when every new outcome
can reuse the source observation of an old outcome below it, and finite bind
against every result continuation preserves rational TT observations.

This is deliberately more precise than a blanket `embed_mono`: adding a fresh
incomparable output need not increase a CPS computation, because an arbitrary
continuation may map that output to bottom. -/
theorem embed_le_of_outcome_retract
  (?? : FiniteInstrumentComp n D)
  (injectOutcome : ?.Outcome -> ?.Outcome)
  (retract : ?.Outcome -> ?.Outcome)
  (hretract : forall o, retract (injectOutcome o) = o)
  (hinjectValue : forall o, ?.value (injectOutcome o) = ?.value o)
  (hvalue : forall q, ?.value (retract q) <= ?.value q)
  (hbind : forall ? : D -> FiniteInstrumentComp n PUnit.{1},
    FiniteInstrumentComp.FinitaryTTRefines
      TTContinuation.resultCode (?.bind ?) (?.bind ?)) :
  embed ? <= embed ? := by
intro k t ht
obtain <sources, hsources, target, hderives, httarget> :=
  (TTTokenTheory.mem_aggregateResult ? k t).mp ht
let extended : ?.Outcome -> TTObservationToken n :=
  fun q => sources (retract q)
apply (TTTokenTheory.mem_aggregateResult ? k t).2
refine <extended, ?, target, ?, httarget>
* intro q
  exact k.monotone (hvalue q) (hsources (retract q))
* intro ? h?
  have h? :
    TTObservationToken.Holds TTContinuation.resultCode
      target (?.bind ?) := by
    apply hderives ?
    intro o
    simpa only [extended, hretract o, hinjectValue o] using
      h? (injectOutcome o)
exact
  (FiniteInstrumentComp.finitaryTTRefines_iff_token_holds
    TTContinuation.resultCode).1 (hbind ?) target h?

/-- A Scott-continuous projection of the ambient continuation domain onto
exactly the finite physical image. Such a projection is intentionally not
asserted to exist. -/

```

```

structure FiniteImageScottRetraction (n : Nat) (D : Type u)
  [CompleteLattice D] where
  project : ScottMap (TTContinuation.TTContinuationPower n D)
    (TTContinuation.TTContinuationPower n D)
  fixes : forall ? : FiniteInstrumentComp n D, project (embed ?) = embed ?
  lands : forall q, exists ? : FiniteInstrumentComp n D, project q = embed ?

/-- Any Scott retraction onto the finite image would force that image to be
closed under all nonempty directed suprema. -/
theorem finiteImage_directedSupClosed_of_retraction
  (R : FiniteImageScottRetraction n D)
  {S : Set (TTContinuation.TTContinuationPower n D)}
  (hS : S.Nonempty) (hdir : DirectedOn (* <= *) S)
  (hfinite : S subseq Set.range (embed (n := n) (D := D))) :
  sSup S in Set.range (embed (n := n) (D := D)) := by
  have himage : R.project '' S = S := by
    ext q
    constructor
    * rintro <p, hpS, rfl>
      obtain <?, h?> := hfinite hpS
      have hpfix : R.project p = p := by
        calc
          R.project p = R.project (embed ?) :=
            congrArg (fun q => R.project q) h?.symm
          _ = embed ? := R.fixes ?
          _ = p := h?
      simp only [hpfix] using hpS
    * intro hqS
      refine <q, hqS, ?_>
      obtain <?, h?> := hfinite hqS
      calc
        R.project q = R.project (embed ?) :=
          congrArg (fun p => R.project p) h?.symm
        _ = embed ? := R.fixes ?
        _ = q := h?
  have hpres := R.project.preservesDirectedSup_coe S hS hdir
  rw [himage] at hpres
  obtain <?, h?> := R.lands (sSup S)
  exact <?, h?.symm.trans hpres>

/-- Thus any directed family of finite embeddings whose supremum is not
finite rules out a Scott retraction onto the finite image. This is the valid
formal boundary: a concrete non-closure witness is required, rather than an
unsupported finite-retract claim. -/
theorem no_finiteImageScottRetraction_of_directedSup_not_finite
  {S : Set (TTContinuation.TTContinuationPower n D)}
  (hS : S.Nonempty) (hdir : DirectedOn (* <= *) S)
  (hfinite : S subseq Set.range (embed (n := n) (D := D)))
  (hnot : sSup S notin Set.range (embed (n := n) (D := D))) :
  FiniteImageScottRetraction n D -> False := by
  intro R
  exact hnot
    (finiteImage_directedSupClosed_of_retraction R hS hdir hfinite)

end TTPhysicalEmbedding

end QLambda

```

A.61 QLambda/TTPhysicalPrimitives.lean

181 lines.

[Lean 4 source](#)


```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/
import QLambda.Interp
import QLambda.TTComputationChoice

/-!
# Minimal physical primitives for the two-dimensional TT model

This module gives a small, concrete primitive signature for a qubit register.
Every primitive is represented by an existing finite physical instrument and
then embedded into the complete tagged TT model. Choice is supplied by that
concrete model rather than by a caller assumption.
-/

namespace QLambda

open Scott1972.ContinuousLattice

universe u

namespace TTPhysicalPrimitives

/-- A minimal qubit primitive signature. Each constructor records the
classical value or values returned by its physical operation. -/
inductive QubitPrimitive (D : Type u) where
  | ret (value : D)
  | pauliX (value : D)
  | measureZ (zeroValue oneValue : D)

/-- The finite physical computation represented by a qubit primitive. -/
def finiteInstrument {D : Type u} :
  QubitPrimitive D -> FiniteInstrumentComp 2 D
  | .ret d => FiniteInstrumentComp.unit (n := 2) d
  | .pauliX d =>
    FiniteInstrumentComp.ofOperation Qubit.pauliXOp d
  | .measureZ d_0 d_1 =>
    Qubit.measureZComp.map fun b => if b then d_1 else d_0

@[simp]
theorem finiteInstrument_ret {D : Type u} (d : D) :
  finiteInstrument (.ret d) =
    FiniteInstrumentComp.unit (n := 2) d :=
  rfl

@[simp]
theorem finiteInstrument_pauliX {D : Type u} (d : D) :
  finiteInstrument (.pauliX d) =
    FiniteInstrumentComp.ofOperation Qubit.pauliXOp d :=
  rfl

@[simp]
theorem finiteInstrument_measureZ {D : Type u} (d_0 d_1 : D) :
  finiteInstrument (.measureZ d_0 d_1) =
    Qubit.measureZComp.map (fun b => if b then d_1 else d_0) :=
  rfl

/-- Physical denotation of a primitive in the two-dimensional TT
continuation model. -/
noncomputable def denote {D : Type u} [CompleteLattice D]
  (p : QubitPrimitive D) :

```

```

    TTContinuation.TTExternalContinuationPower 2 D :=
    TTPhysicalEmbedding.taggedEmbed (finiteInstrument p)

/-- Deterministic return is exactly continuation return, not merely related
to it by refinement. -/
@[simp]
theorem denote_ret {D : Type u} [CompleteLattice D] (d : D) :
  denote (.ret d) = TTContinuation.taggedUnit (n := 2) d := by
  exact TTPhysicalEmbedding.taggedEmbed_unit d

@[simp]
theorem denote_pauliX {D : Type u} [CompleteLattice D] (d : D) :
  denote (.pauliX d) =
    TTPhysicalEmbedding.taggedEmbed
      (FiniteInstrumentComp.ofOperation Qubit.pauliXOp d) :=
  rfl

@[simp]
theorem denote_measureZ {D : Type u} [CompleteLattice D] (d_0 d_1 : D) :
  denote (.measureZ d_0 d_1) =
    TTPhysicalEmbedding.taggedEmbed
      (Qubit.measureZComp.map fun b => if b then d_1 else d_0) :=
  rfl

section Interpreter

variable (D_0 : QDomain.{0})
variable (j_0 : IsContinuousLatticeProjection D_0.carrier
  (QuantumFunctor
    (QModel (TTContinuation.TTExternalContinuationPower 2))
    D_0.carrier))

/-- The primitive signature at the recursive value domain of the
two-dimensional TT continuation model. -/
abbrev SemanticQubitPrimitive :=
  QubitPrimitive
    (SemanticValue
      (TTContinuation.TTExternalContinuationPower 2) D_0 j_0)

/-- The concrete primitive interpretation consumed by `interp`. -/
noncomputable def semanticPrimitive :
  SemanticQubitPrimitive D_0 j_0 ->
  SemanticComp
    (TTContinuation.TTExternalContinuationPower 2) D_0 j_0 :=
  denote

/-- Primitive terms are environment independent. -/
@[simp]
theorem interp_primitive (p : SemanticQubitPrimitive D_0 j_0)
  (? : Env
    (SemanticValue
      (TTContinuation.TTExternalContinuationPower 2) D_0 j_0)) :
  interp (Q := TTContinuation.TTExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0) (semanticPrimitive D_0 j_0) (.prim p) ? =
  semanticPrimitive D_0 j_0 p :=
  rfl

/-- In particular, a physical deterministic return is interpreted by the
TT continuation unit exactly. -/
@[simp]
theorem interp_ret
  (d : SemanticValue
    (TTContinuation.TTExternalContinuationPower 2) D_0 j_0)

```

```

    (? : Env
      (SemanticValue
        (TTContinuation.TTExternalContinuationPower 2) D_0 j_0)) :
  interp (Q := TTContinuation.TTExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0) (semanticPrimitive D_0 j_0)
    (.prim (.ret d)) ? =
    TTContinuation.taggedUnit (n := 2) d := by
  rw [interp_primitive]
  exact denote_ret d

@[simp]
theorem interp_pauliX
  (d : SemanticValue
    (TTContinuation.TTExternalContinuationPower 2) D_0 j_0)
  (? : Env
    (SemanticValue
      (TTContinuation.TTExternalContinuationPower 2) D_0 j_0)) :
  interp (Q := TTContinuation.TTExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0) (semanticPrimitive D_0 j_0)
    (.prim (.pauliX d)) ? =
    TTPhysicalEmbedding.taggedEmbed
      (FiniteInstrumentComp.ofOperation Qubit.pauliXOp d) := by
  rfl

@[simp]
theorem interp_measureZ
  (d_0 d_1 :
    SemanticValue
      (TTContinuation.TTExternalContinuationPower 2) D_0 j_0)
  (? : Env
    (SemanticValue
      (TTContinuation.TTExternalContinuationPower 2) D_0 j_0)) :
  interp (Q := TTContinuation.TTExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0) (semanticPrimitive D_0 j_0)
    (.prim (.measureZ d_0 d_1)) ? =
    TTPhysicalEmbedding.taggedEmbed
      (Qubit.measureZComp.map fun b => if b then d_1 else d_0) := by
  rfl

theorem interp_primitive_environment_independent
  (p : SemanticQubitPrimitive D_0 j_0)
  (? sigma : Env
    (SemanticValue
      (TTContinuation.TTExternalContinuationPower 2) D_0 j_0)) :
  interp (Q := TTContinuation.TTExternalContinuationPower 2)
    (D_0 := D_0) (j_0 := j_0) (semanticPrimitive D_0 j_0) (.prim p) ? =
    interp (Q := TTContinuation.TTExternalContinuationPower 2)
      (D_0 := D_0) (j_0 := j_0) (semanticPrimitive D_0 j_0) (.prim p) sigma := by
  rw [interp_primitive, interp_primitive]

end Interpreter

end TTPhysicalPrimitives

end QLambda

```

A.62 QLambda/TTProbChoice.lean

267 lines.

[Lean 4 source](#)

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/
import QLambda.TTWeightedAggregation

/-!
# Probabilistic choice for TT continuations

For a valid probability, probabilistic choice is the pointwise lifting of the
physical weighted aggregation of TT results. Since `Prob` is currently an
abbreviation for all real numbers, invalid weights are sent to bottom rather
than silently clamped or supplied with fabricated bounds.

This file deliberately does not register `HasComputationChoice`: a distinct
external choice operation is still required for that combined interface.
-/

open Set

namespace QLambda

open Scott1972.ContinuousLattice

universe u

namespace TTContinuation

variable {n : Nat}
variable {D E : Type u}
variable [CompleteLattice D] [CompleteLattice E]

/-- Apply a binary result operation pointwise to a fixed pair of TT
continuations. -/
private noncomputable def pointwiseBinaryAt
  (f : ScottMap (TTResult n x TTResult n) (TTResult n)) :
  (TTContinuationPower n D x TTContinuationPower n D) ->
  TTContinuationPower n D :=
fun qr =>
<fun k => f (qr.1 k, qr.2 k),
continuous_of_preservesDirectedSup fun S hS hdir => by
  let T : Set (TTResult n x TTResult n) :=
    (fun k : ScottMap D (TTResult n) => (qr.1 k, qr.2 k)) '' S
  have hT : T.Nonempty := hS.image _
  have hTdir : DirectedOn (* <= *) T := by
    rintro _ <k, hkS, rfl> _ <l, hlS, rfl>
    obtain <m, hmS, hkm, hlm> := hdir k hkS l hlS
    exact <(qr.1 m, qr.2 m), <m, hmS, rfl>,
      <qr.1.monotone hkm, qr.2.monotone hkm>,
      <qr.1.monotone hlm, qr.2.monotone hlm>>
  have hf := f.preservesDirectedSup_coe T hT hTdir
  change f (qr.1 (sSup S), qr.2 (sSup S)) =
    sSup ((fun k : ScottMap D (TTResult n) =>
      f (qr.1 k, qr.2 k)) '' S)
rw [qr.1.preservesDirectedSup_coe S hS hdir,
qr.2.preservesDirectedSup_coe S hS hdir]
have hpair :
  (sSup T : TTResult n x TTResult n) =
    (sSup (qr.1 '' S), sSup (qr.2 '' S)) := by
  apply Prod.ext
  * rw [Prod.fst_sSup]
  simp only [T, image_image]

```

```

    * rw [Prod.snd_sSup]
      simp only [T, image_image]
    rw [ <- hpair, hf]
    simp only [T, image_image]>

@[simp]
private theorem pointwiseBinaryAt_apply
  (f : ScottMap (TTResult n x TTResult n) (TTResult n))
  (qr : TTContinuationPower n D x TTContinuationPower n D)
  (k : ScottMap D (TTResult n)) :
  pointwiseBinaryAt f qr k = f (qr.1 k, qr.2 k) :=
  rfl

/-- Pointwise lifting of a binary Scott-continuous result operation to TT
continuations. -/
private noncomputable def pointwiseBinary
  (f : ScottMap (TTResult n x TTResult n) (TTResult n)) :
  ScottMap
    (TTContinuationPower n D x TTContinuationPower n D)
    (TTContinuationPower n D) :=
  <pointwiseBinaryAt f,
  continuous_of_preservesDirectedSup fun S hS hdir => by
    apply ScottMap.ext
    intro k
    let T : Set (TTResult n x TTResult n) :=
      (fun qr : TTContinuationPower n D x TTContinuationPower n D =>
        (qr.1 k, qr.2 k)) '' S
    have hT : T.Nonempty := hS.image _
    have hTdir : DirectedOn (* <= *) T := by
      rintro _ <q, hqS, rfl> _ <r, hrS, rfl>
      obtain <s, hsS, hqs, hrs> := hdir q hqS r hrS
      exact <(s.1 k, s.2 k), <s, hsS, rfl>,
        <hqs.1 k, hqs.2 k>, <hrs.1 k, hrs.2 k>>
    have hf := f.preservesDirectedSup_coe T hT hTdir
    change f ((sSup S).1 k, (sSup S).2 k) = _
    rw [ScottMap.sSup_apply]
    have himage :
      (fun g : TTContinuationPower n D => g k) ''
        (pointwiseBinaryAt f '' S) =
      (fun qr :
        TTContinuationPower n D x TTContinuationPower n D =>
        f (qr.1 k, qr.2 k)) '' S := by
    ext y
    constructor
    * rintro <_, <qr, hqrS, rfl>, rfl>
      exact <qr, hqrS, rfl>
    * rintro <qr, hqrS, rfl>
      exact <pointwiseBinaryAt f qr, <qr, hqrS, rfl>, rfl>
  rw [himage]
  rw [Prod.fst_sSup, Prod.snd_sSup, ScottMap.sSup_apply,
    ScottMap.sSup_apply]
  have hpair :
    (sSup T : TTResult n x TTResult n) =
    (sSup ((fun q : TTContinuationPower n D => q k) ''
      (Prod.fst '' S)),
      sSup ((fun q : TTContinuationPower n D => q k) ''
        (Prod.snd '' S))) := by
    apply Prod.ext
    * rw [Prod.fst_sSup]
      simp only [T, image_image]
    * rw [Prod.snd_sSup]
      simp only [T, image_image]
  rw [ <- hpair, hf]

```

```

simp only [T, image_image]>

@[simp]
private theorem pointwiseBinary_apply
  (f : ScottMap (TTResult n x TTResult n) (TTResult n))
  (q r : TTContinuationPower n D) (k : ScottMap D (TTResult n)) :
  pointwiseBinary f (q, r) k = f (q k, r k) :=
  rfl

/-- The total real-indexed probabilistic operation on TT continuations.

Valid probabilities use physical weighted aggregation pointwise. Reals
outside `[0,1]` denote no probabilistic computation and therefore map every
pair to bottom. -/
noncomputable def probChoice (p : Prob) :
  ScottMap
    (TTContinuationPower n D x TTContinuationPower n D)
    (TTContinuationPower n D) :=
  if hp : 0 <= p /\ p <= 1 then
    pointwiseBinary (TTWeightedAggregation.weightedResultScott p hp.1 hp.2)
  else
    False

/-- The defining pointwise equation, including the honest out-of-range case. -/
theorem probChoice_apply
  (p : Prob) (q r : TTContinuationPower n D)
  (k : ScottMap D (TTResult n)) :
  probChoice p (q, r) k =
    if hp : 0 <= p /\ p <= 1 then
      TTWeightedAggregation.weightedResultScott p hp.1 hp.2 (q k, r k)
    else
      False := by
  split_ifs with hp
  * simp [probChoice, hp]
  * simp [probChoice, hp, ScottMap.bot_apply]

@[simp]
theorem probChoice_zero (q r : TTContinuationPower n D) :
  probChoice 0 (q, r) = r := by
  apply ScottMap.ext
  intro k
  rw [probChoice_apply]
  simp

@[simp]
theorem probChoice_one (q r : TTContinuationPower n D) :
  probChoice 1 (q, r) = q := by
  apply ScottMap.ext
  intro k
  rw [probChoice_apply]
  simp

@[simp]
theorem probChoice_of_invalid (p : Prob) (hp : not (0 <= p /\ p <= 1)) :
  probChoice (n := n) (D := D) p = False := by
  simp [probChoice, hp]

/-- Scott continuity of probabilistic choice in both computations is carried
by the `ScottMap` construction itself. -/
theorem probChoice_preservesDirectedSup (p : Prob)
  (S : Set (TTContinuationPower n D x TTContinuationPower n D))
  (hS : S.Nonempty) (hdir : DirectedOn (* <= *) S) :
  probChoice p (sSup S) =

```

```

      sSup ((fun qr => probChoice p qr) '' S) :=
      (probChoice p).preservesDirectedSup_coe S hS hdir

/-- Kleisli extension distributes over probabilistic choice. -/
theorem bind_probChoice (h : ScottMap D (TTContinuationPower n E))
  (p : Prob) (q r : TTContinuationPower n D) :
  bind h (probChoice p (q, r)) =
    probChoice p (bind h q, bind h r) := by
  apply ScottMap.ext
  intro k
  simp only [bind_apply, probChoice_apply]

/-- A concrete weighted branch of a TT probabilistic choice. The relation
retains both the coin parameter and the selected branch's operational
weight. -/
def weightedBranch
  (source : TTContinuationPower n D) (weight : Prob)
  (branch : TTContinuationPower n D) : Prop :=
  exists (p : Prob) (hp_0 : 0 <= p) (hp_1 : p <= 1)
    (q r : TTContinuationPower n D),
    source = probChoice p (q, r) /\
    ((weight = p /\ branch = q) \/
     (weight = 1 - p /\ branch = r))

theorem weightedBranch_prob_left
  (p : Prob) (q r : TTContinuationPower n D)
  (hp_0 : 0 <= p) (hp_1 : p <= 1) :
  weightedBranch (probChoice p (q, r)) p q :=
  <p, hp_0, hp_1, q, r, rfl, Or.inl <rfl, rfl>>

theorem weightedBranch_prob_right
  (p : Prob) (q r : TTContinuationPower n D)
  (hp_0 : 0 <= p) (hp_1 : p <= 1) :
  weightedBranch (probChoice p (q, r)) (1 - p) r :=
  <p, hp_0, hp_1, q, r, rfl, Or.inr <rfl, rfl>>

/-- Weighted branches are closed under a fixed Kleisli continuation. This is
the application-left closure law needed when the function computation takes a
weighted step. -/
theorem weightedBranch_bind
  {source branch : TTContinuationPower n D} {weight : Prob}
  (hsb : weightedBranch source weight branch)
  (h : ScottMap D (TTContinuationPower n E)) :
  weightedBranch (bind h source) weight (bind h branch) := by
  obtain <p, hp_0, hp_1, q, r, rfl, hbranch> := hsb
  rw [bind_probChoice]
  refine <p, hp_0, hp_1, TTContinuation.bind h q,
    TTContinuation.bind h r, rfl, ?_>
  rcases hbranch with hleft | hright
  * exact Or.inl
    <hleft.1, congrArg (TTContinuation.bind h) hleft.2>
  * exact Or.inr
    <hright.1, congrArg (TTContinuation.bind h) hright.2>

/-- Package the concrete relation as the abstract weighted-branch interface
once a later computation-choice implementation identifies its probabilistic
operation with `probChoice`. This is a constructor, not a global instance. -/
@[instance_reducible] noncomputable def weightedBranchSemantics
  [HasComputationChoice (TTContinuationPower n D)]
  (hprob : forall p,
    (HasComputationChoice.prob p :
      ScottMap
        (TTContinuationPower n D x TTContinuationPower n D)

```

```

      (TTContinuationPower n D)) = probChoice p) :
    HasWeightedBranchSemantics (TTContinuationPower n D) where
weightedBranch := weightedBranch
prob_left := by
  intro p q r hp_0 hp_1
  rw [hprob p]
  exact weightedBranch_prob_left p q r hp_0 hp_1
prob_right := by
  intro p q r hp_0 hp_1
  rw [hprob p]
  exact weightedBranch_prob_right p q r hp_0 hp_1

end TTContinuation

end QLambda

```

A.63 QLambda/TTRefinement.lean

196 lines.

Lean 4 source

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/
import QLambda.TTObservationBasis

open Matrix
open scoped ComplexOrder MatrixOrder

namespace QLambda

open Scott1972.ContinuousLattice

universe u

namespace FiniteInstrumentComp

variable {n : Nat} {D : Type u} [CompleteLattice D]

/-- Refinement tested by all finite rational step postconditions. -/
def FinitaryTTRefines (C : OutputCode Nat D)
  (? ? : FiniteInstrumentComp n D) : Prop :=
  forall c : RatStepPostCode n,
    KrausFamily.Refines (? wpKraus (c.decode C)) (? wpKraus (c.decode C))

theorem finitaryTTRefines_refl (C : OutputCode Nat D)
  (? : FiniteInstrumentComp n D) :
  FinitaryTTRefines C ? ? :=
  fun _ => KrausFamily.residualRefines_refl _

theorem finitaryTTRefines_trans (C : OutputCode Nat D)
  {? ? ? : FiniteInstrumentComp n D}
  (h?? : FinitaryTTRefines C ? ?)
  (h?? : FinitaryTTRefines C ? ?) :
  FinitaryTTRefines C ? ? :=
  fun c => KrausFamily.residualRefines_trans (h?? c) (h?? c)

instance instIsPreorderFinitaryTTRefines (C : OutputCode Nat D) :
  IsPreorder (FiniteInstrumentComp n D) (FinitaryTTRefines C) where

```



```

    refl := finitaryTTRefines_refl C
    trans _ _ := finitaryTTRefines_trans C

/-- Full monotone-postcondition TT refinement implies its rational
finite-step restriction. -/
theorem finitaryTTRefines_of_refines (C : OutputCode Nat D)
  {? ? : FiniteInstrumentComp n D} (h?? : Refines ? ?) :
  FinitaryTTRefines C ? ? :=
  fun c => h?? (c.decode C)

/-- Residual and Choi formulations of finitary TT refinement coincide. -/
theorem finitaryTTRefines_iff_choi (C : OutputCode Nat D)
  {? ? : FiniteInstrumentComp n D} :
  FinitaryTTRefines C ? ? <=>
    forall c : RatStepPostCode n,
      KrausFamily.choi (?wpKraus (c.decode C)) <=
        KrausFamily.choi (?wpKraus (c.decode C)) := by
  constructor
  * intro h c
    exact KrausFamily.choiRefines_of_residualRefines (h c)
  * intro h c
    exact KrausFamily.residualRefines_of_choiRefines (h c)

/-- Finitary TT refinement is exactly preservation of every strict
rational quadratic atom. -/
theorem finitaryTTRefines_iff_atom_holds (C : OutputCode Nat D)
  {? ? : FiniteInstrumentComp n D} :
  FinitaryTTRefines C ? ? <=>
    forall a : TTObservationAtom n, a.Holds C ? -> a.Holds C ? := by
  constructor
  * intro h a ha
    apply ha.trans_le
    exact a.choi.eval_mono
      (KrausFamily.choiRefines_of_residualRefines (h a.post))
  * intro h
    rw [finitaryTTRefines_iff_choi]
    intro c
    apply ChoiTest.le_of_rational_quadratic_le
      (KrausFamily.choi_posSemidef _).1
      (KrausFamily.choi_posSemidef _).1
    intro v
    by_contra hle
    have hlt :
      ChoiTest.eval (v, <0, le_rfl>)
        (KrausFamily.choi (?wpKraus (c.decode C))) <
        ChoiTest.eval (v, <0, le_rfl>)
        (KrausFamily.choi (?wpKraus (c.decode C))) :=
      lt_of_not_ge hle
    obtain <q, h?q, hq?> := exists_rat_btwn hlt
    have hq0 : 0 <= q := by
      have h?0 :
        0 <= ChoiTest.eval (v, <0, le_rfl>)
          (KrausFamily.choi (?wpKraus (c.decode C))) :=
          ChoiTest.eval_nonneg _ (KrausFamily.choi_posSemidef _)
      have hq0r : (0 : ?) <= (q : ?) := h?0.trans h?q.le
      exact_mod_cast hq0r
    let a : TTObservationAtom n := <c, (v, <q, hq0>)>
    have h?a : a.Holds C ? := by
      exact hq?
    have h?a : a.Holds C ? := h a h?a
    exact (not_lt_of_ge h?q.le) h?a

/-- Finite conjunctions add no separating power beyond singleton atoms. -/

```

```

theorem finitaryTTRefines_iff_token_holds (C : OutputCode Nat D)
  {? ? : FiniteInstrumentComp n D} :
  FinitaryTTRefines C ? ? <->
    forall t : TTObservationToken n, t.Holds C ? -> t.Holds C ? := by
  rw [finitaryTTRefines_iff_atom_holds]
  constructor
  * intro h t ht a ha
    exact h a (ht a ha)
  * intro h a ha
    have hs : TTObservationToken.Holds C [a] ? := by
      intro b hb
      have hba : b = a := List.mem_singleton.mp hb
      subst b
      exact ha
    have ht := h [a] hs
    exact ht a (by simp)

end FiniteInstrumentComp

namespace RatStepPostCode

variable {n : Nat} {D : Type u} [CompleteLattice D]

/-- Every finite signature at a directed supremum is already attained
at one member of the directed set. -/
theorem exists_signature_eq_of_directed
  (C : OutputCode Nat D) (c : RatStepPostCode n)
  {S : Set D} (hS : S.Nonempty) (hdir : DirectedOn (* <= *) S) :
  exists d in S, c.signature C d = c.signature C (sSup S) := by
  classical
  have hfinite :
    forall I : Finset (Fin c.arity),
      exists d in S, forall i in I,
        c.signature C d i = c.signature C (sSup S) i := by
  intro I
  induction I using Finset.induction_on with
  | empty =>
    obtain <d, hd> := hS
    exact <d, hd, by simp>
  | @insert i I hi ih =>
    obtain <d, hdS, hd> := ih
    by_cases hsup : sSup S in C.observe (c.opens i)
    * obtain <e, heS, he> :=
      (C.observe (c.opens i)).isScottOpen.2 hS hdir hsup
    obtain <z, hzS, hdz, hez> := hdir d hdS e heS
    refine <z, hzS, ?_>
    intro j hj
    rw [Finset.mem_insert] at hj
    rcases hj with hji | hj
    * have hsupj : sSup S in C.observe (c.opens j) := by
      simpa [hji] using hsup
    have hej : e in C.observe (c.opens j) := by
      simpa [hji] using he
    have hzj := (C.observe (c.opens j)).isScottOpen.1 hez hej
    have hzj' : z in C.observe (c.opens j) := by
      change z in (C.observe (c.opens j)).carrier
      exact hzj
    simp [signature, hsupj, hzj']
    * have hdj := hd j hj
      unfold signature at hdj |
      by_cases hsupj : sSup S in C.observe (c.opens j)
    * have hdmem : d in C.observe (c.opens j) := by
      simpa [hsupj] using hdj

```

```

      have hzmem :=
        (C.observe (c.opens j)).isScottOpen.1 hdz hdmem
      have hzmem' : z in C.observe (c.opens j) := by
        change z in (C.observe (c.opens j)).carrier
        exact hzmem
      simp [hsupj, hzmem']
    * have hzmem : z notin C.observe (c.opens j) := by
      intro hz
      exact hsupj ((C.observe (c.opens j)).isScottOpen.1
        (le_sSup hzS) hz)
      simp [hsupj, hzmem]
  * refine <d, hdS, ?_>
    intro j hj
    rw [Finset.mem_insert] at hj
    rcases hj with hji | hj
    * have hsupj : sSup S notin C.observe (c.opens j) := by
      simpa [hji] using hsup
    have hdnot : d notin C.observe (c.opens j) := by
      intro hdmem
      exact hsupj ((C.observe (c.opens j)).isScottOpen.1
        (le_sSup hdS) hdmem)
      simp [signature, hsupj, hdnot]
    * exact hd j hj
  obtain <d, hdS, hd> := hfinite Finset.univ
  refine <d, hdS, funext fun i => ?_>
  exact hd i (Finset.mem_univ i)

end RatStepPostCode

end QLambda

```

A.64 QLambda/TTResultAlgebra.lean

294 lines.

Lean 4 source

```

import QLambda.TTContinuationMonad
import QLambda.TTRefinement

open Matrix
open scoped BigOperators ComplexOrder MatrixOrder

namespace QLambda

namespace KrausFamily

variable {n m ? : Nat}

theorem semEq_identity_comp (K : KrausFamily n m) :
  SemEq (comp (identity m) K) K := by
  rw [identity_comp]
  exact applySemEq_refl K

theorem semEq_comp_identity (K : KrausFamily n m) :
  SemEq (comp K (identity n)) K := by
  rw [comp_identity]
  exact applySemEq_refl K

theorem semEq_comp_append_left (L_1 L_2 : KrausFamily m ?)
  (K : KrausFamily n m) :
  SemEq (comp (L_1 ++ L_2) K) (comp L_1 K ++ comp L_2 K) := by

```

```

rw [comp_append]
exact applySemEq_refl _

theorem semEq_comp_append_right (L : KrausFamily m ?)
  (K_1 K_2 : KrausFamily n m) :
  SemEq (comp L (K_1 ++ K_2)) (comp L K_1 ++ comp L K_2) := by
  intro ?
  simp only [applyMat_comp, applyMat_append]
  exact applyMat_add L _ _

theorem semEq_comp_assoc (M : KrausFamily ? r) (L : KrausFamily m ?)
  (K : KrausFamily n m) :
  SemEq (comp M (comp L K)) (comp (comp M L) K) := by
  rw [comp_assoc]
  exact applySemEq_refl _

end KrausFamily

namespace FiniteInstrumentComp

variable {n : Nat}

noncomputable def totalKraus (? : FiniteInstrumentComp n PUnit.{1}) :
  KrausFamily n n := by
  classical
  exact Finset.univ.toList.flatMap ?.branch

theorem applyMat_totalKraus (? : FiniteInstrumentComp n PUnit.{1})
  (? : Matrix (Fin n) (Fin n) ?) :
  KrausFamily.applyMat ?.totalKraus ? =
  ? o : ?.Outcome, KrausFamily.applyMat (?.branch o) ? := by
  classical
  unfold totalKraus
  rw [KrausFamily.applyMat_flatMap]
  simp

theorem choi_totalKraus (? : FiniteInstrumentComp n PUnit.{1}) :
  KrausFamily.choi ?.totalKraus =
  ? o : ?.Outcome, KrausFamily.choi (?.branch o) := by
  classical
  unfold totalKraus
  rw [FiniteInstrumentComp.choi_flatMap]
  simp

theorem totalKraus_trace_nonincreasing
  (? : FiniteInstrumentComp n PUnit.{1})
  (? : Matrix (Fin n) (Fin n) ?) (h? : ?.PosSemidef) :
  (Matrix.trace (KrausFamily.applyMat ?.totalKraus ?)).re <=
  (Matrix.trace ?).re := by
  rw [applyMat_totalKraus]
  simpa using ?.trace_nonincreasing ? h?

noncomputable def totalOperation (? : FiniteInstrumentComp n PUnit.{1}) :
  QuantumOperation n n where
  kraus := ?.totalKraus
  trace_nonincreasing := ?.totalKraus_trace_nonincreasing

@[simp] theorem totalOperation_kraus
  (? : FiniteInstrumentComp n PUnit.{1}) :
  ?.totalOperation.kraus = ?.totalKraus :=
  rfl

theorem applyMat_totalOperation (? : FiniteInstrumentComp n PUnit.{1})

```

```

    (? : Matrix (Fin n) (Fin n) ?) :
    KrausFamily.applyMat ?.totalOperation.kraus ? =
    ? o : ?.Outcome, KrausFamily.applyMat (?.branch o) ? :=
    ?.applyMat_totalKraus ?

theorem choi_totalOperation (? : FiniteInstrumentComp n PUnit.{1}) :
    KrausFamily.choi ?.totalOperation.kraus =
    ? o : ?.Outcome, KrausFamily.choi (?.branch o) :=
    ?.choi_totalKraus

end FiniteInstrumentComp

namespace RatStepPostCode

variable {n : Nat}

theorem signature_resultCode (c : RatStepPostCode n) (d : PUnit.{1}) :
    c.signature TTContinuation.resultCode d = fun _ => true := by
    classical
    funext i
    unfold signature
    have hd : d in TTContinuation.resultCode.observe (c.opens i) := by
        change d in (Set.univ : Set PUnit.{1})
    simp
    rw [if_pos hd]

theorem signature_resultCode_eq (c : RatStepPostCode n)
    (d e : PUnit.{1}) :
    c.signature TTContinuation.resultCode d =
    c.signature TTContinuation.resultCode e := by
    exact (signature_resultCode c d).trans (signature_resultCode c e).symm

noncomputable def resultMatrix (c : RatStepPostCode n) : RatCPMatrix n :=
    c.decodedMatrix TTContinuation.resultCode PUnit.unit

noncomputable def resultOperation (c : RatStepPostCode n) :
    QuantumOperation n n :=
    c.decodedOperation TTContinuation.resultCode PUnit.unit

theorem decodedMatrix_resultCode (c : RatStepPostCode n) (d : PUnit.{1}) :
    c.decodedMatrix TTContinuation.resultCode d = c.resultMatrix := by
    unfold resultMatrix decodedMatrix decodedTNI
    rw [signature_resultCode_eq c d PUnit.unit]

theorem decodedOperation_resultCode (c : RatStepPostCode n)
    (d : PUnit.{1}) :
    c.decodedOperation TTContinuation.resultCode d = c.resultOperation := by
    unfold resultOperation decodedOperation decodedTNI
    rw [signature_resultCode_eq c d PUnit.unit]

theorem decodedKraus_resultCode (c : RatStepPostCode n) (d : PUnit.{1}) :
    c.decodedKraus TTContinuation.resultCode d = c.resultOperation.kraus := by
    unfold decodedKraus
    rw [decodedOperation_resultCode]

end RatStepPostCode

namespace FiniteInstrumentComp

variable {n : Nat}

private theorem applyMat_sum (K : KrausFamily n n)
    {a : Type*} [Fintype a]

```

```

(f : a -> Matrix (Fin n) (Fin n) ?) :
KrausFamily.applyMat K (? a, f a) =
  ? a, KrausFamily.applyMat K (f a) := by
classical
induction (Finset.univ : Finset a) using Finset.induction_on with
| empty =>
  simp only [Finset.sum_empty]
  induction K with
  | nil => simp
  | cons A K ih =>
    rw [KrausFamily.applyMat_cons, ih]
    simp
| @insert a s ha ih =>
  rw [Finset.sum_insert ha, Finset.sum_insert ha, KrausFamily.applyMat_add, ih]

theorem wpKraus_result_semEq
  (? : FiniteInstrumentComp n PUnit.{1}) (c : RatStepPostCode n) :
  KrausFamily.SemEq
    (?wpKraus (c.decode TTContinuation.resultCode))
    (KrausFamily.comp c.resultOperation.kraus ?.totalOperation.kraus) := by
intro ?
rw [applyMat_wpKraus, KrausFamily.applyMat_comp,
  totalOperation_kraus, applyMat_totalKraus,
  applyMat_sum]
apply Finset.sum_congr rfl
intro o _
rw [KrausFamily.applyMat_comp]
change
  KrausFamily.applyMat
    (c.decodedKraus TTContinuation.resultCode (?.value o))
    (KrausFamily.applyMat (?.branch o) ?) =
  KrausFamily.applyMat c.resultOperation.kraus
    (KrausFamily.applyMat (?.branch o) ?)
rw [c.decodedKraus_resultCode (?.value o)]

theorem wpKraus_result_trace_nonincreasing
  (? : FiniteInstrumentComp n PUnit.{1}) (c : RatStepPostCode n)
  (? : Matrix (Fin n) (Fin n) ?) (h? : ?.PosSemidef) :
  (Matrix.trace
    (KrausFamily.applyMat
      (?wpKraus (c.decode TTContinuation.resultCode)) ?)) .re <=
  (Matrix.trace ?) .re := by
rw [wpKraus_result_semEq ? c ?]
exact
  (QuantumOperation.comp c.resultOperation ?.totalOperation).trace_nonincreasing
  ? h?

noncomputable def wpResultOperation
  (? : FiniteInstrumentComp n PUnit.{1}) (c : RatStepPostCode n) :
  QuantumOperation n n where
kraus := ?.wpKraus (c.decode TTContinuation.resultCode)
trace_nonincreasing := ?.wpKraus_result_trace_nonincreasing c

@[simp] theorem wpResultOperation_kraus
  (? : FiniteInstrumentComp n PUnit.{1}) (c : RatStepPostCode n) :
  (?wpResultOperation c).kraus =
  ?.wpKraus (c.decode TTContinuation.resultCode) :=
rfl

theorem wpResultOperation_semEq_comp
  (? : FiniteInstrumentComp n PUnit.{1}) (c : RatStepPostCode n) :
  KrausFamily.SemEq (?wpResultOperation c).kraus
  (QuantumOperation.comp c.resultOperation ?.totalOperation).kraus :=

```

```

    ?.wpKraus_result_semEq c

end FiniteInstrumentComp

universe u

variable {n : Nat} {D : Type u} [CompleteLattice D]

namespace FiniteInstrumentComp

theorem wpKraus_mono_pred_on_values
  (? : FiniteInstrumentComp n D) (P : PUnit.{1} -> KrausFamily n n)
  {?_1 ?_2 : D -> FiniteInstrumentComp n PUnit.{1}}
  (h : forall o : ?.Outcome,
    KrausFamily.Refines
      ((?_1 (? .value o)).wpKraus P) ((?_2 (? .value o)).wpKraus P)) :
    KrausFamily.Refines
      (? .wpKraus fun d => (?_1 d).wpKraus P)
      (? .wpKraus fun d => (?_2 d).wpKraus P) := by
  unfold wpKraus
  apply KrausFamily.residualRefines_flatMap
  intro o _
  exact KrausFamily.residualRefines_comp_right (? .branch o) (h o)

theorem finitaryTTRefines_bind_result_values
  (? : FiniteInstrumentComp n D)
  {?_1 ?_2 : D -> FiniteInstrumentComp n PUnit.{1}}
  (h : forall o : ?.Outcome,
    FinitaryTTRefines TTContinuation.resultCode
      (?_1 (? .value o)) (?_2 (? .value o))) :
    FinitaryTTRefines TTContinuation.resultCode (? .bind ?_1) (? .bind ?_2) := by
  letI : Preorder D := ChainCompletePartialOrder.instOfCompleteLattice.toPreorder
  letI : Preorder PUnit := ChainCompletePartialOrder.instOfCompleteLattice.toPreorder
  rw [finitaryTTRefines_iff_choi TTContinuation.resultCode]
  intro c
  let pred := (RatStepPostCode.decode TTContinuation.resultCode c).pred
  have hchoi_1 :=
    KrausFamily.choi_eq_of_semEq (wpKraus_bind_semEq ? ?_1 pred)
  have hchoi_2 :=
    KrausFamily.choi_eq_of_semEq (wpKraus_bind_semEq ? ?_2 pred)
  have hle :=
    KrausFamily.choiRefines_of_residualRefines <|
      wpKraus_mono_pred_on_values ? pred fun o =>
        KrausFamily.residualRefines_of_choiRefines
          ((finitaryTTRefines_iff_choi TTContinuation.resultCode).1 (h o) c)
  exact (le_of_eq hchoi_1).trans (hle.trans (le_of_eq hchoi_2.symmm))

theorem bindPresented_eq_of_values
  (? : FiniteInstrumentComp n D)
  {?_1 ?_2 : D -> FiniteInstrumentComp n PUnit.{1}}
  (h : forall o : ?.Outcome, ?_1 (? .value o) = ?_2 (? .value o)) :
  (? .bind ?_1).satisfiedTTTheory TTContinuation.resultCode =
  (? .bind ?_2).satisfiedTTTheory TTContinuation.resultCode := by
  apply (satisfiedTTTheory_eq_iff_mutual_finitaryTTRefines
    TTContinuation.resultCode).2
  constructor
  * exact finitaryTTRefines_bind_result_values ? fun o => by
    rw [h o]
    exact finitaryTTRefines_refl _ _
  * exact finitaryTTRefines_bind_result_values ? fun o => by
    rw [← h o]
    exact finitaryTTRefines_refl _ _

```

```

theorem satisfiedTTTheory_bind_mono_values
  (? : FiniteInstrumentComp n D)
  {?_1 ?_2 : D -> FiniteInstrumentComp n PUnit.{1}}
  (h : forall o : ?.Outcome,
    (?_1 (? .value o)).satisfiedTTTheory TTContinuation.resultCode <=
      (?_2 (? .value o)).satisfiedTTTheory TTContinuation.resultCode) :
  (? .bind ?_1).satisfiedTTTheory TTContinuation.resultCode <=
    (? .bind ?_2).satisfiedTTTheory TTContinuation.resultCode :=
  (satisfiedTTTheory_le_iff_finitaryTTRefines
    TTContinuation.resultCode).2
  (finitaryTTRefines_bind_result_values ? fun o =>
    (satisfiedTTTheory_le_iff_finitaryTTRefines
      TTContinuation.resultCode).1 (h o))

end FiniteInstrumentComp

end QLambda

```

A.65 QLambda/TTResultApproximation.lean

1230 lines.

Lean 4 source (lines 1–400)

```

import QLambda.TTResultAlgebra
import QLambda.TTRoundedTheory

open Matrix
open scoped BigOperators ComplexOrder MatrixOrder

namespace QLambda

namespace KrausFamily

variable {n m : Nat}

theorem trace_choi_eq_trace_applyMat_one (K : KrausFamily n m) :
  Matrix.trace (choi K) =
    Matrix.trace (applyMat K (1 : Matrix (Fin n) (Fin n) ?)) := by
  calc
    Matrix.trace (choi K) =
      ? a : Fin m, ? i : Fin n, choi K (a, i) (a, i) :=
      Fintype.sum_prod_type _
    _ = Matrix.trace (applyMat K (1 : Matrix (Fin n) (Fin n) ?)) := by
      simp only [Matrix.trace, Matrix.diag_apply]
      simp_rw [applyMat_apply, Matrix.one_apply]
      simp

theorem choi_diagonal_re_le_input_dim (K : KrausFamily n m)
  (hK : forall ? : Matrix (Fin n) (Fin n) ?, ? .PosSemidef ->
    (Matrix.trace (applyMat K ?)).re <= (Matrix.trace ?).re)
  (p : Fin m x Fin n) :
  0 <= (choi K p p).re /\ (choi K p p).re <= n := by
  have hpos := choi_posSemidef K
  have hdiag : forall q : Fin m x Fin n, 0 <= (choi K q q).re := by
    intro q
    exact Complex.nonneg_iff.mp hpos.diag_nonneg |>.1
  constructor
  * exact hdiag p
  * have hp :
    (choi K p p).re <= ? q : Fin m x Fin n, (choi K q q).re := by
      simpa using Finset.single_le_sum
      (s := Finset.univ) (fun q _ => hdiag q) (Finset.mem_univ p)

```



```

have htrace :
  (? q : Fin m x Fin n, (choi K q q).re) =
    (Matrix.trace (choi K)).re := by
  simp [Matrix.trace]
rw [htrace] at hp
exact hp.trans (by
  rw [trace_choi_eq_trace_applyMat_one]
  simp using hK (1 : Matrix (Fin n) (Fin n) ?) Matrix.PosSemidef.one)

theorem two_mul_norm_choi_entry_le_diagonal (K : KrausFamily n m)
  (p q : Fin m x Fin n) :
  2 * ?choi K p q? <= (choi K p p).re + (choi K q q).re := by
induction K with
| nil => simp [choi]
| cons A K ih =>
  rw [choi_cons]
  simp only [Matrix.add_apply, choiTerm]
  calc
    2 * ?A p.1 p.2 * star (A q.1 q.2) + choi K p q? <=
      2 * (?A p.1 p.2 * star (A q.1 q.2)? + ?choi K p q?) := by
    gcongr
    exact norm_add_le _ _
  _ <= (A p.1 p.2 * star (A p.1 p.2)).re +
    (A q.1 q.2 * star (A q.1 q.2)).re +
    ((choi K p p).re + (choi K q q).re) := by
  rw [mul_add]
  gcongr
  simp only [norm_mul, norm_star]
  rw [show (A p.1 p.2 * star (A p.1 p.2)).re =
    ?A p.1 p.2? ^ 2 by
    simp [Complex.sq_norm, Complex.normSq_apply],
    show (A q.1 q.2 * star (A q.1 q.2)).re =
    ?A q.1 q.2? ^ 2 by
    simp [Complex.sq_norm, Complex.normSq_apply]]
  simp [mul_assoc] using
    two_mul_le_add_sq ?A p.1 p.2? ?A q.1 q.2?
  _ = (A p.1 p.2 * star (A p.1 p.2) + choi K p p).re +
    (A q.1 q.2 * star (A q.1 q.2) + choi K q q).re := by
  simp
  ring

theorem norm_choi_entry_le_input_dim (K : KrausFamily n m)
  (hK : forall ? : Matrix (Fin n) (Fin n) ?, ?.PosSemidef ->
    (Matrix.trace (applyMat K ?)).re <= (Matrix.trace ?).re)
  (p q : Fin m x Fin n) :
  ?choi K p q? <= n := by
have hp := (choi_diagonal_re_le_input_dim K hK p).2
have hq := (choi_diagonal_re_le_input_dim K hK q).2
have hpq := two_mul_norm_choi_entry_le_diagonal K p q
linarith

end KrausFamily

namespace QuantumOperation

variable {n m : Nat}

theorem choi_trace_le_input_dim (? : QuantumOperation n m) :
  (Matrix.trace (KrausFamily.choi ?.kraus)).re <= n := by
  rw [KrausFamily.trace_choi_eq_trace_applyMat_one]
  simp using ?.trace_nonincreasing
  (1 : Matrix (Fin n) (Fin n) ?) Matrix.PosSemidef.one

```

```

end QuantumOperation

namespace FiniteInstrumentComp

variable {n : Nat}

/-- A single branch of a finite instrument, regarded as a TNI operation. -/
noncomputable def branchOperation {D : Type*}
  (? : FiniteInstrumentComp n D) (o : ?.Outcome) :
    QuantumOperation n n where
  kraus := ?.branch o
  trace_nonincreasing := by
    intro ? h?
    have hnonneg : forall i : ?.Outcome,
      0 <= (Matrix.trace (KrausFamily.applyMat (?.branch i) ?)).re := by
      intro i
      simp [Matrix.trace] using
        (Finset.sum_nonneg fun j (_ : j in Finset.univ) =>
          (Complex.nonneg_iff.mp
            (KrausFamily.applyMat_posSemidef (?.branch i) h?).diag_nonneg).1)
    exact (Finset.single_le_sum (fun i _ => hnonneg i)
      (Finset.mem_univ o)).trans (?.trace_nonincreasing ? h?)

def precomposeResult (? : QuantumOperation n n)
  (? : FiniteInstrumentComp n PUnit.{1}) :
  FiniteInstrumentComp n PUnit.{1} :=
  (FiniteInstrumentComp.ofOperation ? (PUnit.unit : PUnit.{1})).bind
  (fun _ => ?)

theorem totalOperation_precomposeResult_semEq
  (? : QuantumOperation n n) (? : FiniteInstrumentComp n PUnit.{1}) :
  KrausFamily.SemEq (?.precomposeResult ?).totalOperation.kraus
    (QuantumOperation.comp ?.totalOperation ?).kraus := by
  intro ?
  rw [FiniteInstrumentComp.applyMat_totalOperation]
  change
    (? o, KrausFamily.applyMat ((?.precomposeResult ?).branch o) ?) =
      KrausFamily.applyMat
        (KrausFamily.comp ?.totalOperation.kraus ?.kraus) ?
  rw [KrausFamily.applyMat_comp,
    FiniteInstrumentComp.applyMat_totalOperation]
  change
    (? p : Sigma _ : Unit, ?.Outcome,
      KrausFamily.applyMat
        (KrausFamily.comp (?.branch p.2) ?.kraus) ?) =
      ? o, KrausFamily.applyMat (?.branch o)
        (KrausFamily.applyMat ?.kraus ?)
  rw [Fintype.sum_sigma]
  simp [KrausFamily.applyMat_comp]

end FiniteInstrumentComp

namespace TTResultApproximation

variable {n : Nat}

def pulledVector (A : KrausOperator n n)
  (v : Fin n x Fin n -> ?) : Fin n x Fin n -> ? :=
  fun p => ? i, star (A p.2 i) * v (p.1, i)

theorem star_pulledVector (A : KrausOperator n n)
  (v : Fin n x Fin n -> ?) (p : Fin n x Fin n) :
  star (pulledVector A v) p =

```

```

    ? i, star (v (p.1, i)) * A p.2 i := by
change (starRingEnd ?) (? i, star (A p.2 i) * v (p.1, i)) = _
rw [map_sum]
apply Finset.sum_congr rfl
intro i _
rw [map_mul]
change star (star (A p.2 i)) * star (v (p.1, i)) = _
rw [star_star]
exact mul_comm _ _

private theorem sum_six_permute
(f : Fin n -> Fin n -> Fin n -> Fin n -> Fin n -> Fin n -> ?) :
(? a, ? i, ? b, ? j, ? x, ? y, f a i b j x y) =
  ? a, ? x, ? b, ? y, ? j, ? i, f a i b j x y := by
apply Fintype.sum_congr
intro a
calc
  (? i, ? b, ? j, ? x, ? y, f a i b j x y) =
    ? b, ? i, ? j, ? x, ? y, f a i b j x y := Finset.sum_comm
_ = ? b, ? j, ? i, ? x, ? y, f a i b j x y := by
  apply Fintype.sum_congr
  intro b
  exact Finset.sum_comm
_ = ? b, ? j, ? x, ? i, ? y, f a i b j x y := by
  apply Fintype.sum_congr
  intro b
  apply Fintype.sum_congr
  intro j
  exact Finset.sum_comm
_ = ? b, ? j, ? x, ? y, ? i, f a i b j x y := by
  apply Fintype.sum_congr
  intro b
  apply Fintype.sum_congr
  intro j
  apply Fintype.sum_congr
  intro x
  exact Finset.sum_comm
_ = ? b, ? x, ? j, ? y, ? i, f a i b j x y := by
  apply Fintype.sum_congr
  intro b
  exact Finset.sum_comm
_ = ? x, ? b, ? j, ? y, ? i, f a i b j x y := Finset.sum_comm
_ = ? x, ? b, ? y, ? j, ? i, f a i b j x y := by
  apply Fintype.sum_congr
  intro x
  apply Fintype.sum_congr
  intro b
  exact Finset.sum_comm

noncomputable def complexQuadratic (v : Fin n x Fin n -> ?)
(J : Matrix (Fin n x Fin n) (Fin n x Fin n) ?) : ? :=
star v ?? (J *? v)

theorem complexQuadratic_comp (L K : KrausFamily n n)
(v : Fin n x Fin n -> ?) :
complexQuadratic v (KrausFamily.choi (KrausFamily.comp L K)) =
  (K.map fun A => complexQuadratic (pulledVector A v)
    (KrausFamily.choi L)).sum := by
simp only [complexQuadratic, dotProduct, Matrix.mulVec]
simp_rw [Fintype.sum_prod_type, KrausFamily.choi_comp_apply]
induction K with
| nil => simp [KrausFamily.choi]
| cons A K ih =>

```

```

simp only [List.map_cons, List.sum_cons, KrausFamily.choi_cons,
  Matrix.add_apply, mul_add, add_mul, Finset.sum_add_distrib]
rw [ih]
simp_rw [pulledVector, star_pulledVector]
simp only [KrausFamily.choiTerm, Finset.mul_sum, Finset.sum_mul]
rw [add_left_inj]
rw [sum_six_permute]
simp only [Pi.star_apply]
apply Fintype.sum_congr
intro a
apply Fintype.sum_congr
intro x
apply Fintype.sum_congr
intro b
apply Fintype.sum_congr
intro y
apply Fintype.sum_congr
intro j
apply Fintype.sum_congr
intro i
ring

noncomputable def quadraticErrorBound (x y : Fin n x Fin n → ?) : ? :=
  n * ((? p, ?x p - y p?) * (? q, ?x q?) +
    (? p, ?y p?) * (? q, ?x q - y q?))

theorem norm_complexQuadratic_sub_le (x y : Fin n x Fin n → ?)
  (J : Matrix (Fin n x Fin n) (Fin n x Fin n) ?)
  (hJ : forall p q, ?J p q? ≤ n) :
  ?complexQuadratic x J - complexQuadratic y J? ≤
    quadraticErrorBound x y := by
  have hrearrange :
    complexQuadratic x J - complexQuadratic y J =
      ? p, ? q,
        ((star (x p) - star (y p)) * J p q * x q +
          star (y p) * J p q * (x q - y q)) := by
  simp only [complexQuadratic, dotProduct, Matrix.mulVec, Pi.star_apply,
    Finset.mul_sum]
  rw [← Finset.sum_sub_distrib]
  apply Fintype.sum_congr
  intro p
  rw [← Finset.sum_sub_distrib]
  apply Fintype.sum_congr
  intro q
  ring
  rw [hrearrange]
  calc
    ?? p, ? q,
      ((star (x p) - star (y p)) * J p q * x q +
        star (y p) * J p q * (x q - y q))? ≤
      ? p, ?? q,
        ((star (x p) - star (y p)) * J p q * x q +
          star (y p) * J p q * (x q - y q))? :=
    norm_sum_le _ _
  - ≤ ? p, ? q,
      ?(star (x p) - star (y p)) * J p q * x q +
        star (y p) * J p q * (x q - y q)? := by
    gcongr with p
    exact norm_sum_le _ _
  - ≤ ? p, ? q,
      (?x p - y p? * n * ?x q? +
        ?y p? * n * ?x q - y q?) := by
    gcongr with p q

```

```

calc
  (star (x p) - star (y p)) * J p q * x q +
    star (y p) * J p q * (x q - y q)? <=
    (star (x p) - star (y p)) * J p q * x q? +
      star (y p) * J p q * (x q - y q)? :=
    norm_add_le _ _
  _ = ?x p - y p? * ?J p q? * ?x q? +
    ?y p? * ?J p q? * ?x q - y q? := by
    simp only [norm_mul, norm_star, <- star_sub]
  _ <= ?x p - y p? * n * ?x q? +
    ?y p? * n * ?x q - y q? := by
    gcongr <;> exact hJ p q
  _ = quadraticErrorBound x y := by
  have h_1 :
    (? p, ? q, ?x p - y p? * n * ?x q?) =
      n * (? p, ?x p - y p?) * (? q, ?x q?) := by
  calc
    (? p, ? q, ?x p - y p? * n * ?x q?) =
      ? p, ?x p - y p? * (n * ? q, ?x q?) := by
    apply Fintype.sum_congr
    intro p
    rw [Finset.mul_sum]
    rw [Finset.mul_sum]
    apply Fintype.sum_congr
    intro q
    ring
  _ = (? p, ?x p - y p?) * (n * ? q, ?x q?) := by
    rw [Finset.sum_mul]
  _ = n * (? p, ?x p - y p?) * (? q, ?x q?) := by
    ring
  have h_2 :
    (? p, ? q, ?y p? * n * ?x q - y q?) =
      n * (? p, ?y p?) * (? q, ?x q - y q?) := by
  calc
    (? p, ? q, ?y p? * n * ?x q - y q?) =
      ? p, ?y p? * (n * ? q, ?x q - y q?) := by
    apply Fintype.sum_congr
    intro p
    rw [Finset.mul_sum]
    rw [Finset.mul_sum]
    apply Fintype.sum_congr
    intro q
    ring
  _ = (? p, ?y p?) * (n * ? q, ?x q - y q?) := by
    rw [Finset.sum_mul]
  _ = n * (? p, ?y p?) * (? q, ?x q - y q?) := by
    ring
  simp only [Finset.sum_add_distrib, h_1, h_2, quadraticErrorBound]
  ring

theorem abs_re_complexQuadratic_sub_le (x y : Fin n x Fin n -> ?)
  (J : Matrix (Fin n x Fin n) (Fin n x Fin n) ?)
  (hJ : forall p q, ?J p q? <= n) :
  |(complexQuadratic x J).re - (complexQuadratic y J).re| <=
    quadraticErrorBound x y := by
  calc
    |(complexQuadratic x J).re - (complexQuadratic y J).re| =
      |(complexQuadratic x J - complexQuadratic y J).re| := by
    rw [Complex.sub_re]
  _ <= ?complexQuadratic x J - complexQuadratic y J? :=
    Complex.abs_re_le_norm _
  _ <= quadraticErrorBound x y :=
    norm_complexQuadratic_sub_le x y J hJ

```

```

theorem continuous_quadraticErrorBound (x : Fin n x Fin n -> ?) :
  Continuous (quadraticErrorBound x) := by
  apply Continuous.const_mul
  apply Continuous.add
  * apply Continuous.mul
  * apply continuous_finsetSum Finset.univ
  intro p _
  exact (continuous_const.sub (continuous_apply p)).norm
  * exact continuous_const
  * apply Continuous.mul
  * apply continuous_finsetSum Finset.univ
  intro p _
  exact (continuous_apply p).norm
  * apply continuous_finsetSum Finset.univ
  intro q _
  exact (continuous_const.sub (continuous_apply q)).norm

theorem quadraticErrorBound_self (x : Fin n x Fin n -> ?) :
  quadraticErrorBound x x = 0 := by
  simp [quadraticErrorBound]

theorem exists_ratChoiVec_error_lt (x : Fin n x Fin n -> ?)
  {? : ?} (h? : 0 < ?) :
  exists v : RatChoiVec n, quadraticErrorBound x v.toComplex < ? := by
  let f : (Fin n x Fin n -> RatComplex) ->
    (Fin n x Fin n -> ?) :=
    Pi.map fun _ => RatComplex.toComplex
  have hf : DenseRange f :=
    DenseRange.piMap fun _ => RatComplex.denseRange_toComplex
  let U : Set (Fin n x Fin n -> ?) :=
    {y | quadraticErrorBound x y < ?}
  have hUopen : IsOpen U :=
    isOpen_lt (continuous_quadraticErrorBound x) continuous_const
  have hxU : x in U := by
    change quadraticErrorBound x x < ?
    rw [quadraticErrorBound_self]
    exact h?
  obtain <q, hq> := hf.exists_mem_open hUopen <x, hxU>
  let v : RatChoiVec n := fun k => q (finProdFinEquiv.symm k)
  have hv : v.toComplex = f q := by
    funext i
    change (q (finProdFinEquiv.symm (finProdFinEquiv i))).toComplex =
      (q i).toComplex
    rw [Equiv.symm_apply_apply]
  exact <v, by simpa [U, hv] using hq>

```

Lean 4 source (lines 401–800)

```

theorem complexQuadratic_add_real_smul (x w : Fin n x Fin n -> ?)
  (J : Matrix (Fin n x Fin n) (Fin n x Fin n) ?) (c : ?) :
  complexQuadratic (x + (c : ?) * w) J =
    complexQuadratic x J +
      (c : ?) * (star x ?? (J *? w) + star w ?? (J *? x)) +
      (c : ?) ^ 2 * complexQuadratic w J := by
  simp only [complexQuadratic]
  rw [star_add, star_smul, Matrix.mulVec_add, Matrix.mulVec_smul,
    add_dotProduct, dotProduct_add, dotProduct_add, smul_dotProduct,
    dotProduct_smul]
  rw [smul_dotProduct, dotProduct_smul]
  simp only [smul_eq_mul, Complex.star_def, Complex.conj_ofReal]
  ring

```

```

theorem exists_positive_in_open_of_positive
  (J : Matrix (Fin n x Fin n) (Fin n x Fin n) ?)
  (hJ : J.PosSemidef) (w : Fin n x Fin n -> ?)
  (hw : 0 < (complexQuadratic w J).re)
  {U : Set (Fin n x Fin n -> ?)} (hU : IsOpen U) (hUne : U.Nonempty) :
  exists z in U, 0 < (complexQuadratic z J).re := by
  obtain <x, hxU> := hUne
  by_cases hx : 0 < (complexQuadratic x J).re
  * exact <x, hxU, hx>
  have hxnonneg : 0 <= (complexQuadratic x J).re := by
    exact hJ.re_dotProduct_nonneg x
  have hxzero : (complexQuadratic x J).re = 0 := le_antisymm (not_lt.mp hx) hxnonneg
  let path : ? -> (Fin n x Fin n -> ?) :=
    fun c => x + (c : ?) * w
  have hpath : Continuous path := by
    apply continuous_const.add
    exact (Complex.continuous_ofReal.comp continuous_id).smul continuous_const
  have hpre : IsOpen (path ^-1' U) := hpath.isOpen_preimage U hU
  have hzero : (0 : ?) in path ^-1' U := by
    simpa [path] using hxU
  obtain <?, h?, hzero> := (Metric.isOpen_iff.mp hpre) 0 hzero
  let cross : ? :=
    (star x ?? (J *? w) + star w ?? (J *? x)).re
  let c : ? := if 0 <= cross then ? / 2 else -(? / 2)
  have hcabs : |c| = ? / 2 := by
    dsimp [c]
    split
    * rw [abs_of_nonneg]
      linarith
    * rw [abs_neg, abs_of_nonneg]
      linarith
  have hcpos : 0 < |c| := by rw [hcabs]; linarith
  have hcdist : dist (0 : ?) c < ? := by
    simpa [Real.dist_eq, hcabs] using (show ? / 2 < ? by linarith)
  have hcU : path c in U := hball (by simpa [Metric.mem_ball] using hcdist)
  have hcs : 0 <= c * cross := by
    dsimp [c]
    split_ifs with hs
    * exact mul_nonneg (by linarith) hs
    * exact mul_nonneg_of_nonpos_of_nonpos (by linarith)
      (le_of_not_ge hs)
  have hc2 : 0 < c ^ 2 * (complexQuadratic w J).re := by
    exact mul_pos (sq_pos_of_ne_zero (abs_pos.mp hcpos)) hw
  refine <path c, hcU, ?_>
  have hformula := congrArg Complex.re
    (complexQuadratic_add_real_smul x w J c)
  rw [← Complex.ofReal_pow] at hformula
  simp only [Complex.add_re, Complex.mul_re, Complex.ofReal_re,
    Complex.ofReal_im, zero_mul, sub_zero] at hformula
  rw [hformula, hxzero]
  change 0 < 0 + c * cross + c ^ 2 * (complexQuadratic w J).re
  linarith

theorem exists_ratChoiVec_error_lt_eval_pos
  (J : Matrix (Fin n x Fin n) (Fin n x Fin n) ?)
  (hJ : J.PosSemidef) (w x : Fin n x Fin n -> ?)
  (hw : 0 < (complexQuadratic w J).re)
  {? : ?} (h? : 0 < ?) :
  exists v : RatChoiVec n,
    quadraticErrorBound x v.toComplex < ? /\
    0 < (complexQuadratic v.toComplex J).re := by
  let U : Set (Fin n x Fin n -> ?) :=
    {y | quadraticErrorBound x y < ?}

```

```

let V : Set (Fin n x Fin n -> ?) :=
  {y | 0 < (complexQuadratic y J).re}
have hU : IsOpen U :=
  isOpen_lt (continuous_quadraticErrorBound x) continuous_const
have hxU : x in U := by
  change quadraticErrorBound x x < ?
  rw [quadraticErrorBound_self]
  exact h?
obtain <z, hzU, hzV> :=
  exists_positive_in_open_of_positive J hJ w hw hU <x, hxU>
have hV : IsOpen V :=
  isOpen_lt continuous_const (by
    simpa [complexQuadratic] using ChoiTest.continuous_quadratic J)
have hUV : IsOpen (U ∩ V) := hU.inter hV
let f : (Fin n x Fin n -> RatComplex) ->
  (Fin n x Fin n -> ?) :=
  Pi.map fun _ => RatComplex.toComplex
have hf : DenseRange f :=
  DenseRange.piMap fun _ => RatComplex.denseRange_toComplex
obtain <q, hq> := hf.exists_mem_open hUV <z, hzU, hzV>
let v : RatChoiVec n := fun k => q (finProdFinEquiv.symm k)
have hv : v.toComplex = f q := by
  funext i
  change (q (finProdFinEquiv.symm (finProdFinEquiv i))).toComplex =
    (q i).toComplex
  rw [Equiv.symm_apply_apply]
exact <v, by simpa [U, V, hv] using hq.1,
  by simpa [U, V, hv] using hq.2>

noncomputable def sourceAtom (post : RatStepPostCode n) (t : ChoiTest n) :
  TTObservationAtom n :=
  <post, t>

noncomputable def sourceToken (post : RatStepPostCode n)
  (tests : List (ChoiTest n)) : TTObservationToken n :=
  tests.map (sourceAtom post)

noncomputable def sourceEval (post : RatStepPostCode n)
  (t : ChoiTest n) (? : FiniteInstrumentComp n PUnit.{1}) : ? :=
  t.eval (KrausFamily.choi (?wpKraus (post.decode TTContinuation.resultCode)))

theorem norm_sourceChoi_entry_le_dim (post : RatStepPostCode n)
  (? : FiniteInstrumentComp n PUnit.{1})
  (p q : Fin n x Fin n) :
  ?KrausFamily.choi
    (?wpKraus (post.decode TTContinuation.resultCode)) p q? <= n :=
  KrausFamily.norm_choi_entry_le_input_dim
    (?wpKraus (post.decode TTContinuation.resultCode))
    (?wpKraus_result_trace_nonincreasing post) p q

theorem wpKraus_precomposeResult_semEq
  (? : QuantumOperation n n) (? : FiniteInstrumentComp n PUnit.{1})
  (P : PUnit.{1} -> KrausFamily n n) :
  KrausFamily.SemEq ((?precomposeResult ?).wpKraus P)
  (KrausFamily.comp (?wpKraus P) ?.kraus) := by
  apply KrausFamily.applySemEq_trans
  (FiniteInstrumentComp.wpKraus_bind_semEq
    (FiniteInstrumentComp.ofOperation ? (PUnit.unit : PUnit.{1}))
    (fun _ => ?) P)
intro ?
rw [FiniteInstrumentComp.applyMat_wpKraus]
change (? _ : Unit,
  KrausFamily.applyMat

```



```

      (KrausFamily.comp (? wpKraus P) ? .kraus) ?) =
      KrausFamily.applyMat (KrausFamily.comp (? wpKraus P) ? .kraus) ?
simp

noncomputable def targetEval (? : QuantumOperation n n)
  (a : TTObservationAtom n) (? : FiniteInstrumentComp n PUnit.{1}) : ? :=
  a.choi.eval
  (KrausFamily.choi
    ((?.precomposeResult ?).wpKraus
      (a.post.decode TTContinuation.resultCode)))

theorem targetEval_eq_sum_pulled (? : QuantumOperation n n)
  (a : TTObservationAtom n) (? : FiniteInstrumentComp n PUnit.{1}) :
  targetEval ? a ? =
    (?.kraus.map fun A =>
      (complexQuadratic (pulledVector A a.choi.vector)
        (KrausFamily.choi
          (? wpKraus
            (a.post.decode TTContinuation.resultCode)))).re).sum := by
  have hsem := wpKraus_precomposeResult_semEq ? ?
  (a.post.decode TTContinuation.resultCode)
  have hchoi := KrausFamily.choi_eq_of_semEq hsem
  rw [targetEval, ChoiTest.eval, hchoi]
  change (complexQuadratic a.choi.vector
    (KrausFamily.choi
      (KrausFamily.comp
        (? wpKraus (a.post.decode TTContinuation.resultCode))
        ? .kraus))).re = _
  rw [complexQuadratic_comp]
  generalize ? .kraus = K
  induction K with
  | nil => simp
  | cons A K ih => simp [ih]

private theorem choiTest_eval_list_sum (t : ChoiTest n)
  (Js : List (Matrix (Fin n x Fin n) (Fin n x Fin n) ?)) :
  t.eval Js.sum = (Js.map t.eval).sum := by
  induction Js with
  | nil => simp [ChoiTest.eval]
  | cons J Js ih =>
    simp only [List.sum_cons, List.map_cons]
    rw [ <- ih]
    simp [ChoiTest.eval, Matrix.add_mulVec, dotProduct_add]

private theorem choiTest_eval_comp (t : ChoiTest n)
  (L K : KrausFamily n n) :
  t.eval (KrausFamily.choi (KrausFamily.comp L K)) =
    (K.map fun A =>
      (complexQuadratic (pulledVector A t.vector)
        (KrausFamily.choi L)).re).sum := by
  change (complexQuadratic t.vector
    (KrausFamily.choi (KrausFamily.comp L K))).re = _
  rw [complexQuadratic_comp]
  induction K with
  | nil => simp
  | cons A K ih => simp [ih]

/-- A bind target is the sum of the targets contributed by the instrument
branches. -/
theorem targetEval_bind_eq_sum {D : Type*}
  [CompleteLattice D] (? : FiniteInstrumentComp n D)
  (? : D -> FiniteInstrumentComp n PUnit.{1})
  (a : TTObservationAtom n) :

```

```

a.choi.eval
  (KrausFamily.choi
    ((?.bind ?).wpKraus
      (a.post.decode TTContinuation.resultCode))) =
  ? o : ?.Outcome,
  targetEval (?.branchOperation o) a (?.value o) := by
classical
let P := a.post.decode TTContinuation.resultCode
have hbind := KrausFamily.choi_eq_of_semEq
  (FiniteInstrumentComp.wpKraus_bind_semEq ? ? P)
rw [hbind]
unfold FiniteInstrumentComp.wpKraus
rw [FiniteInstrumentComp.choi_flatMap]
rw [choiTest_eval_list_sum]
simp_rw [targetEval_eq_sum_pulled]
rw [List.map_map]
have hlist (f : ?.Outcome -> ?) :
  (Finset.univ.toList.map f).sum = ? o, f o := by
  rw [← List.sum_toFinset f (Finset.nodup_toList Finset.univ)]
  simp
rw [hlist]
apply Finset.sum_congr rfl
intro o _
change a.choi.eval
  (KrausFamily.choi
    (KrausFamily.comp
      ((? (?.value o)).wpKraus P)
      (?.branch o))) =
  ((?.branch o).map fun A =>
    (complexQuadratic (pulledVector A a.choi.vector)
      (KrausFamily.choi ((? (?.value o)).wpKraus P))).re).sum
exact choiTest_eval_comp a.choi
  ((? (?.value o)).wpKraus P) (?.branch o)

private theorem exists_mem_pos_of_sum_pos (xs : List ?)
  (h : 0 < xs.sum) : exists x in xs, 0 < x := by
induction xs with
| nil => simp at h
| cons x xs ih =>
  by_cases hx : 0 < x
  * exact <x, by simp, hx>
  * have htail : 0 < xs.sum := by
    simp only [List.sum_cons] at h
    linarith
  obtain <y, hy, hypos> := ih htail
  exact <y, by simp [hy], hypos>

private theorem exists_rational_threshold_tests
  {a : Type*} (value : a -> ?) (xs : List a)
  (hpos : forall x in xs, 0 < value x) {L : ?}
  (hL : L < (xs.map value).sum) :
  exists ts : List (a x NonnegRat),
    ts.map Prod.fst = xs /\
    (forall t in ts, (t.2.1 : ?) < value t.1) /\
    L < (ts.map fun t => (t.2.1 : ?)).sum := by
induction xs generalizing L with
| nil =>
  exact <[], rfl, by simp, by simp using hL>
| cons x xs ih =>
  have hxpos : 0 < value x := hpos x (by simp)
  have hL' : L < value x + (xs.map value).sum := by
    simp only [List.map_cons, List.sum_cons] using hL
  have hlower : max (0 : ?) (L - (xs.map value).sum) < value x := by

```

```

    apply max_lt hxpos
    linarith
  obtain <q, hqlower, hqvalue> := exists_rat_btwn hlower
  have hqnonneg : 0 ≤ q := by
    exact_mod_cast (show (0 : ?) ≤ (q : ?) from
      (le_max_left _ _).trans hqlower.le)
  let qr : NonnegRat := <q, hqnonneg>
  have htail : L - (q : ?) < (xs.map value).sum := by
    have hq : L - (xs.map value).sum < (q : ?) :=
      (le_max_right _ _).trans_lt hqlower
    linarith
  obtain <ts, hfst, hall, hsum> :=
    ih (fun y hy => hpos y (by simp [hy])) htail
  refine <(x, qr) :: ts, by simp [hfst], ?_, ?_>
  * intro t ht
    rcases List.mem_cons.mp ht with rfl | ht
    * exact hqvalue
    * exact hall t ht
  * simp only [List.map_cons, List.sum_cons]
    dsimp [qr]
    linarith

private theorem abs_list_sum_le_sum_abs (xs : List ?) :
  |xs.sum| ≤ (xs.map abs).sum := by
  induction xs with
  | nil => simp
  | cons x xs ih =>
    simp only [List.sum_cons, List.map_cons]
    exact (abs_add_le x xs.sum).trans (add_le_add (le_refl _) ih)

structure RationalLocalCertificate (? : QuantumOperation n n) where
  target : TTObservationAtom n
  tests : List (ChoiTest n)
  tests_nonempty : tests != []
  error : ?
  error_nonneg : 0 ≤ error
  target_add_error_lt_threshold_sum :
    target.choi.threshold + error <
      (tests.map ChoiTest.threshold).sum
  uniform_error : forall ? : FiniteInstrumentComp n PUnit.{1},
    |(tests.map fun t => sourceEval target.post t ?).sum -
      targetEval ? target ?| ≤ error

namespace RationalLocalCertificate

variable {? : QuantumOperation n n}

noncomputable def source (c : RationalLocalCertificate ?) :
  TTObservationToken n :=
  sourceToken c.target.post c.tests

theorem source_holds_iff (c : RationalLocalCertificate ?)
  (? : FiniteInstrumentComp n PUnit.{1}) :
  TTObservationToken.Holds TTContinuation.resultCode c.source ? <->
  forall t in c.tests, t.threshold < sourceEval c.target.post t ? := by
  constructor
  * intro h t ht
    apply h (sourceAtom c.target.post t)
    * exact List.mem_map.mpr <t, ht, rfl>
  * intro h a ha
    obtain <t, ht, rfl> := List.mem_map.mp ha
    exact h t ht

```

```

theorem source_entails_target (c : RationalLocalCertificate ?) :
  forall ? : FiniteInstrumentComp n PUnit.{1},
    TTObservationToken.Holds TTContinuation.resultCode c.source ? ->
    TTObservationToken.Holds TTContinuation.resultCode c.target
      (? .precomposeResult ?) := by
intro ? h?
have hall : forall t in c.tests,
  t.threshold <= sourceEval c.target.post t ? := by
  intro t ht
  exact ((c.source_holds_iff ?) .mp h? t ht) .le
have hex : exists t in c.tests,
  t.threshold < sourceEval c.target.post t ? := by
  obtain <t, ht> := List.exists_mem_of_ne_nil c.tests c.tests_nonempty
  exact <t, ht, (c.source_holds_iff ?) .mp h? t ht>
have hsum :
  (c.tests.map ChoiTest.threshold).sum <
    (c.tests.map fun t => sourceEval c.target.post t ?) .sum :=
  List.sum_lt_sum ChoiTest.threshold
  (fun t => sourceEval c.target.post t ?) hall hex
have happ :
  (c.tests.map fun t => sourceEval c.target.post t ?) .sum -
    targetEval ? c.target ? <= c.error :=
  (le_abs_self _).trans (c.uniform_error ?)
change c.target.choi.threshold < targetEval ? c.target ?
linarith [c.target_add_error_lt_threshold_sum, hsum]

theorem exists_source_of_certificate_at
  (c : RationalLocalCertificate ?)
  (? : FiniteInstrumentComp n PUnit.{1})
  (h? : TTObservationToken.Holds TTContinuation.resultCode c.source ?) :
  exists s : TTObservationToken n,
    TTObservationToken.Holds TTContinuation.resultCode s ? /\
    (forall ? : FiniteInstrumentComp n PUnit.{1},
      TTObservationToken.Holds TTContinuation.resultCode s ? ->
      TTObservationToken.Holds TTContinuation.resultCode c.target
        (? .precomposeResult ?)) :=
  <c.source, h?, c.source_entails_target>

end RationalLocalCertificate

theorem exists_rationalLocalCertificate
  (? : QuantumOperation n n) (a : TTObservationToken n)
  (? : FiniteInstrumentComp n PUnit.{1})
  (h? : TTObservationToken.Holds TTContinuation.resultCode a
    (? .precomposeResult ?)) :
  exists c : RationalLocalCertificate ?,
    c.target = a /\
    TTObservationToken.Holds TTContinuation.resultCode c.source ? := by
classical
let J? := KrausFamily.choi
  (? .wpKraus (a.post.decode TTContinuation.resultCode))
let exactValue : KrausOperator n n -> ? :=
  fun A => (complexQuadratic (pulledVector A a.choi.vector) J?).re
have htarget : a.choi.threshold < targetEval ? a ? := h?
have hsumpos : 0 < (? .kraus.map exactValue).sum := by
  rw [ <- targetEval_eq_sum_pulled ? a ? ]
have hthreshold_nonneg : (0 : ?) <= a.choi.threshold := by
  change (0 : ?) <= (a.choi.2.1 : ?)
  exact_mod_cast a.choi.2.2
exact hthreshold_nonneg.trans_lt htarget
obtain <r, hrmem, hrpos> :=
  exists_mem_pos_of_sum_pos (? .kraus.map exactValue) hsumpos
obtain <Aw, hAw, rfl> := List.mem_map.mp hrmem

```

```

let witness := pulledVector Aw a.choi.vector
have hwitness : 0 < (complexQuadratic witness J?).re := hrpos
let margin : ? := targetEval ? a ? - a.choi.threshold
have hmargin : 0 < margin := sub_pos.mpr htarget
let ? : ? := margin / (4 * ((?.kraus.length : ?) + 1))
have h? : 0 < ? := by
  dsimp [?]

```

Lean 4 source (lines 801–1200)

```

positivity
have happ : forall A : KrausOperator n n,
  exists v : RatChoiVec n,
    quadraticErrorBound (pulledVector A a.choi.vector) v.toComplex < ? /\
    0 < (complexQuadratic v.toComplex J?).re := by
  intro A
  exact exists_ratChoiVec_error_lt_eval_pos J?
    (KrausFamily.choi_posSemidef _) witness
    (pulledVector A a.choi.vector) hwitness h?
choose v hvError hvPos using happ
let vectors : List (RatChoiVec n) := ?.kraus.map v
let error : ? := ?.kraus.length * ?
have herror_nonneg : 0 <= error := by
  dsimp [error]
  positivity
have htwise_error : 2 * error < margin := by
  have hk : (0 : ?) <= ?.kraus.length := by positivity
  have hk1 : 0 < ((?.kraus.length : ?) + 1) := by positivity
  have hfrac : ((?.kraus.length : ?) + 1) < 1 := by
    rw [div_lt_one hk1]
  linarith
dsimp [error, ?]
rw [show (?.kraus.length : ?) *
  (margin / (4 * ((?.kraus.length : ?) + 1))) =
  margin / 4 *
  ((?.kraus.length : ?) /
  ((?.kraus.length : ?) + 1)) by
  field_simp]
nlinarith
have approx_error :
  forall ? : FiniteInstrumentComp n PUnit.{1},
    |(? .kraus.map fun A =>
      (complexQuadratic (v A).toComplex
        (KrausFamily.choi
          (? .wpKraus
            (a.post.decode TTContinuation.resultCode))))).re).sum -
      targetEval ? a ?| <= error := by
  intro ?
  let J? := KrausFamily.choi
    (? .wpKraus (a.post.decode TTContinuation.resultCode))
  rw [targetEval_eq_sum_pulled]
  have hdiff :
    (?.kraus.map fun A => (complexQuadratic (v A).toComplex J?).re).sum -
    (?.kraus.map fun A =>
      (complexQuadratic (pulledVector A a.choi.vector) J?).re).sum =
    (?.kraus.map fun A =>
      (complexQuadratic (v A).toComplex J?).re -
      (complexQuadratic (pulledVector A a.choi.vector) J?).re).sum := by
  induction ?.kraus with
  | nil => simp
  | cons A K ih =>
    simp only [List.map_cons, List.sum_cons]
    rw [← ih]

```

```

    ring
  rw [hdiff]
  apply (abs_list_sum_le_sum_abs _).trans
  have hterms :
    (?.kraus.map fun A =>
      |(complexQuadratic (v A).toComplex J?).re -
        (complexQuadratic (pulledVector A a.choi.vector) J?).re|).sum <=
        ?.kraus.length * ? := by
    induction ?.kraus with
    | nil => simp
    | cons A K ih =>
      simp only [List.map_cons, List.sum_cons, List.length_cons,
        Nat.cast_add, Nat.cast_one]
      have hA :
        |(complexQuadratic (v A).toComplex J?).re -
          (complexQuadratic
            (pulledVector A a.choi.vector) J?).re| <= ? := by
        rw [abs_sub_comm]
        exact (abs_re_complexQuadratic_sub_le
          (pulledVector A a.choi.vector) (v A).toComplex J?
          (fun p q => norm_sourceChoi_entry_le_dim a.post ? p q)).trans
          (hvError A).le
      nlinarith
    simp [List.map_map, Function.comp_def, error] using hterms
  have hsourceSum :
    a.choi.threshold + error <
    (vectors.map fun rv =>
      (complexQuadratic rv.toComplex J?).re).sum := by
  have happ? := approx_error ?
  have happ?' :
    |(vectors.map fun rv =>
      (complexQuadratic rv.toComplex J?).re).sum -
      targetEval ? a ?| <= error := by
    dsimp [vectors, J?]
    rw [List.map_map]
    simp only [Function.comp_def] using happ?
  have hlower :
    targetEval ? a ? - error <=
    (vectors.map fun rv =>
      (complexQuadratic rv.toComplex J?).re).sum := by
    linarith [happ?', neg_abs_le
      ((vectors.map fun rv =>
        (complexQuadratic rv.toComplex J?).re).sum -
        targetEval ? a ?)]
    dsimp [margin] at htwise_error
    linarith
  have hvectors_pos : forall rv in vectors,
    0 < (complexQuadratic rv.toComplex J?).re := by
    intro rv hrv
    obtain <A, hA, rfl> := List.mem_map.mp hrv
    exact hvPos A
  obtain <tests, htests_vectors, htests_pos, htests_sum> :=
    exists_rational_threshold_tests
    (fun rv : RatChoiVec n => (complexQuadratic rv.toComplex J?).re)
    vectors hvectors_pos hsourceSum
  have htests_ne : tests != [] := by
    intro hnil
    have hvnil : vectors = [] := by simp [hnil] using htests_vectors.symm
    have hknill : ?.kraus = [] := by
      simp [vectors] using hvnil
    simp [hknill] at hsumpos
  let c : RationalLocalCertificate ? := {
    target := a

```

```

tests := tests
tests_nonempty := htests_ne
error := error
error_nonneg := herror_nonneg
target_add_error_lt_threshold_sum := htests_sum
uniform_error := by
  intro ?
  have happ? := approx_error ?
  have hevals :
    (tests.map fun t => sourceEval a.post t ?).sum =
      (vectors.map fun rv =>
        (complexQuadratic rv.toComplex
          (KrausFamily.choi
            (?.wpKraus
              (a.post.decode TTContinuation.resultCode))))).re).sum := by
  calc
    (tests.map fun t => sourceEval a.post t ?).sum =
      ((tests.map Prod.fst).map fun rv =>
        (complexQuadratic rv.toComplex
          (KrausFamily.choi
            (?.wpKraus
              (a.post.decode TTContinuation.resultCode))))).re).sum := by
      simp [sourceEval, ChoiTest.eval, complexQuadratic,
        ChoiTest.vector, List.map_map, Function.comp_def]
    _ = _ := by rw [htests_vectors]
  rw [hevals]
  dsimp [vectors]
  rw [List.map_map]
  simp only [Function.comp_def] using happ?
}
refine <c, rfl, ?_>
rw [RationalLocalCertificate.source_holds_iff]
intro t ht
have htpos := htests_pos t ht
change (t.2.1 : ?) < (complexQuadratic t.1.toComplex J?).re
exact htpos

theorem exists_rational_source_token
  (? : QuantumOperation n n) (a : TTObservationAtom n)
  (? : FiniteInstrumentComp n PUnit.{1})
  (h? : TTObservationAtom.Holds TTContinuation.resultCode a
    (?.precomposeResult ?)) :
  exists s : TTObservationToken n,
    TTObservationToken.Holds TTContinuation.resultCode s ? /\
  forall ? : FiniteInstrumentComp n PUnit.{1},
    TTObservationToken.Holds TTContinuation.resultCode s ? ->
    TTObservationAtom.Holds TTContinuation.resultCode a
      (?.precomposeResult ?) := by
  obtain <c, rfl, hc> := exists_rationalLocalCertificate ? a ? h?
  exact c.exists_source_of_certificate_at ? hc

noncomputable def tokenSource {? : QuantumOperation n n}
  (cs : List (RationalLocalCertificate ?)) : TTObservationToken n :=
  cs.flatMap RationalLocalCertificate.source

theorem tokenSource_holds {? : QuantumOperation n n}
  (cs : List (RationalLocalCertificate ?))
  (? : FiniteInstrumentComp n PUnit.{1})
  (h : forall c in cs,
    TTObservationToken.Holds TTContinuation.resultCode c.source ?) :
  TTObservationToken.Holds TTContinuation.resultCode (tokenSource cs) ? := by
  intro a ha
  obtain <c, hc, hac> := List.mem_flatMap.mp ha

```

```

exact h c hc a hac

theorem tokenSource_entails_targets {? : QuantumOperation n n}
  (cs : List (RationalLocalCertificate ?))
  (? : FiniteInstrumentComp n PUnit.{1})
  (h? : TTObservationToken.Holds TTContinuation.resultCode
    (tokenSource cs) ?) :
  TTObservationToken.Holds TTContinuation.resultCode
    (cs.map RationalLocalCertificate.target) (? .precomposeResult ?) := by
intro a ha
obtain <c, hc, rfl> := List.mem_map.mp ha
apply c.source_entails_target ?
intro b hb
apply h? b
exact List.mem_flatMap.mpr <c, hc, hb>

theorem exists_source_token_of_certificates_at
  {? : QuantumOperation n n}
  (cs : List (RationalLocalCertificate ?))
  (? : FiniteInstrumentComp n PUnit.{1})
  (h? : forall c in cs,
    TTObservationToken.Holds TTContinuation.resultCode c.source ?) :
exists s : TTObservationToken n,
  TTObservationToken.Holds TTContinuation.resultCode s ? /\
  (forall ? : FiniteInstrumentComp n PUnit.{1},
    TTObservationToken.Holds TTContinuation.resultCode s ? ->
    TTObservationToken.Holds TTContinuation.resultCode
      (cs.map RationalLocalCertificate.target)
        (? .precomposeResult ?)) :=
<tokenSource cs, tokenSource_holds cs ? h?,
  tokenSource_entails_targets cs>

theorem exists_precompose_source_token
  (? : QuantumOperation n n) (u : TTObservationToken n)
  (? : FiniteInstrumentComp n PUnit.{1})
  (hu : TTObservationToken.Holds TTContinuation.resultCode u
    (? .precomposeResult ?)) :
exists s : TTObservationToken n,
  TTObservationToken.Holds TTContinuation.resultCode s ? /\
  forall ?' : FiniteInstrumentComp n PUnit.{1},
    TTObservationToken.Holds TTContinuation.resultCode s ?' ->
    TTObservationToken.Holds TTContinuation.resultCode u
      (?' .precomposeResult ?) := by
classical
let cs : List (RationalLocalCertificate ?) :=
  (u.attach.map fun <a, ha> =>
    Classical.choose (exists_rationalLocalCertificate ? a ? (hu a ha)))
have h? : forall c in cs,
  TTObservationToken.Holds TTContinuation.resultCode c.source ? := by
intro c hc
obtain <<a, ha>, _, rfl> := List.mem_map.mp hc
exact (Classical.choose_spec
  (exists_rationalLocalCertificate ? a ? (hu a ha))).2
obtain <s, hs, hall> :=
  exists_source_token_of_certificates_at cs ? h?
refine <s, hs, fun ?' hs' a ha => ?_>
have hmem :
  Classical.choose
    (exists_rationalLocalCertificate ? a ? (hu a ha)) in cs := by
  refine List.mem_map.mpr <<a, ha>, ?_, rfl>
  simp
have hct :
  (Classical.choose

```



```

      (exists_rationalLocalCertificate ? a ? (hu a ha))).target = a :=
    (Classical.choose_spec
      (exists_rationalLocalCertificate ? a ? (hu a ha))).left
exact hall ?' hs' a (List.mem_map.mpr <_, hmem, hct>)

/-- A single observation of a finite bind has finitely many branch-local
source tokens which entail it. -/
theorem exists_bind_source_atoms {D : Type*} [CompleteLattice D]
  (? : FiniteInstrumentComp n D) (a : TTObservationAtom n)
  (? : D → FiniteInstrumentComp n PUnit.{1})
  (ha : TTObservationAtom.Holds TTContinuation.resultCode a (? .bind ?)) :
  exists sources : ?.Outcome → TTObservationToken n,
    (forall o, TTObservationToken.Holds TTContinuation.resultCode
      (sources o) (? (.value o))) /\
    forall ?' : D → FiniteInstrumentComp n PUnit.{1},
      (forall o, TTObservationToken.Holds TTContinuation.resultCode
        (sources o) (?' (.value o))) →
      TTObservationAtom.Holds TTContinuation.resultCode a (? .bind ?') := by
  classical
  let value : ?.Outcome → ? := fun o =>
    targetEval (? .branchOperation o) a (? (.value o))
  have hvalue_nonneg (o : ?.Outcome) : 0 ≤ value o := by
    exact a.choi.eval_nonneg (KrausFamily.choi_posSemidef _)
  let positive : List ?.Outcome :=
    (Finset.univ.filter fun o => 0 < value o).toList
  have hpositive (o : ?.Outcome) (ho : o in positive) : 0 < value o := by
    simpa [positive] using ho
  have hsum_value :
    (positive.map value).sum = ? o : ?.Outcome, value o := by
  have hlist :
    (positive.map value).sum =
      ? o in Finset.univ.filter (fun o => 0 < value o), value o := by
  rw [← List.sum_toFinset value
    (Finset.nodup_toList (Finset.univ.filter fun o => 0 < value o))]
  simp
  rw [hlist]
  apply Finset.sum_subset (Finset.filter_subset _ _)
  intro o _ ho
  simp only [Finset.mem_filter, Finset.mem_univ, true_and] at ho
  exact le_antisymm (not_lt.mp ho) (hvalue_nonneg o)
  have hthreshold :
    a.choi.threshold < (positive.map value).sum := by
  rw [hsum_value, <- targetEval_bind_eq_sum ? ? a]
  exact ha
  obtain <tests, htestsfst, htestsvalue, htestssum> :=
    exists_rational_threshold_tests value positive hpositive hthreshold
  have htests_ne : tests != [] := by
    intro hnil
    have hqnonneg : 0 ≤ a.choi.threshold := by
      change (0 : ?) ≤ (a.choi.2.1 : ?)
      exact_mod_cast a.choi.2.2
    simp [hnil] at htestssum
    linarith
  let componentAtom (t : ?.Outcome × NonnegRat) : TTObservationAtom n :=
    <a.post, (a.choi.1, t.2)>
  have hcomponent (t : ?.Outcome × NonnegRat) (ht : t in tests) :
    TTObservationAtom.Holds TTContinuation.resultCode (componentAtom t)
      ((? (.value t.1)).precomposeResult (? .branchOperation t.1)) := by
    change (t.2.1 : ?) < value t.1
    exact htestsvalue t ht
  let sourceFor (t : {t // t in tests}) : TTObservationToken n :=
    Classical.choose
      (exists_rational_source_token (? .branchOperation t.1.1))

```

```

      (componentAtom t.1) (? (? .value t.1.1)) (hcomponent t.1 t.2))
have sourceFor_spec (t : {t // t in tests}) :
  TTObservationToken.Holds TTContinuation.resultCode (sourceFor t)
    (? (? .value t.1.1)) /\
  forall ? : FiniteInstrumentComp n PUnit.{1},
    TTObservationToken.Holds TTContinuation.resultCode (sourceFor t) ? ->
      TTObservationToken.Holds TTContinuation.resultCode
        (componentAtom t.1)
          (? .precomposeResult (? .branchOperation t.1.1)) :=
Classical.choose_spec
  (exists_rational_source_token (? .branchOperation t.1.1)
    (componentAtom t.1) (? (? .value t.1.1)) (hcomponent t.1 t.2))
let sources : ? .Outcome -> TTObservationToken n := fun o =>
  (tests.attach.filter fun t => t.1.1 = o).flatMap sourceFor
refine <sources, ?_, ?_>
* intro o b hb
  obtain <t, ht, hbt> := List.mem_flatMap.mp hb
  have hto : t.1.1 = o := by
    simp [sources] using ht
  subst o
  exact (sourceFor_spec t).1 b hbt
* intro ?' hsources
  have htest (t : {t // t in tests}) :
    TTObservationToken.Holds TTContinuation.resultCode
      (componentAtom t.1)
        ((?' (? .value t.1.1)).precomposeResult
          (? .branchOperation t.1.1)) := by
    apply (sourceFor_spec t).2
    intro b hb
    apply hsources t.1.1 b
    apply List.mem_flatMap.mpr
    exact <t, by simp, hb>
  have hterms : forall t in tests,
    (t.2.1 : ?) <=
      targetEval (? .branchOperation t.1) a (?' (? .value t.1)) := by
    intro t ht
    exact (htest <t, ht>).le
  have hex : exists t in tests,
    (t.2.1 : ?) <
      targetEval (? .branchOperation t.1) a (?' (? .value t.1)) := by
    obtain <t, ht> := List.exists_mem_of_ne_nil tests htests_ne
    exact <t, ht, htest <t, ht>>
  have hstrict :
    (tests.map fun t => (t.2.1 : ?)).sum <
      (tests.map fun t =>
        targetEval (? .branchOperation t.1) a
          (?' (? .value t.1))).sum :=
    List.sum_lt_sum _ _ hterms hex
  have hselected :
    (tests.map fun t =>
      targetEval (? .branchOperation t.1) a
        (?' (? .value t.1))).sum <=
      ? o : ? .Outcome,
      targetEval (? .branchOperation o) a (?' (? .value o)) := by
    let value' : ? .Outcome -> ? := fun o =>
      targetEval (? .branchOperation o) a (?' (? .value o))
    change (tests.map fun t => value' t.1).sum <= ? o, value' o
  have hmap :
    tests.map (fun t => value' t.1) =
      (tests.map Prod.fst).map value' := by
    rw [List.map_map]
    rfl
  rw [hmap, htests_fst]

```

```

have hlist :
  (positive.map value').sum =
    ? o in positive.toFinset, value' o := by
  rw [ <- List.sum_toFinset value'
    (Finset.nodup_toList (Finset.univ.filter fun o => 0 < value o))]
  rw [hlist]
  apply Finset.sum_le_sum_of_subset_of_nonneg
  * intro o ho
  simp
  * intro o _ _
  exact a.choi.eval_nonneg (KrausFamily.choi_posSemidef _)
change a.choi.threshold <
a.choi.eval
  (KrausFamily.choi
    ((?.bind ?').wpKraus
      (a.post.decode TTContinuation.resultCode)))
  rw [targetEval_bind_eq_sum ? ?' a]
  linarith

/-- A finite token held by a bind has one finite source token at each
instrument outcome, uniformly entailing the target token. -/
theorem exists_bind_source_tokens {D : Type*} [CompleteLattice D]
  (? : FiniteInstrumentComp n D) (u : TTObservationToken n)
  (? : D -> FiniteInstrumentComp n PUnit.{1})
  (hu : TTObservationToken.Holds TTContinuation.resultCode u (?.bind ?)) :
  exists sources : ?.Outcome -> TTObservationToken n,
    (forall o, TTObservationToken.Holds TTContinuation.resultCode
      (sources o) (? (?.value o))) /\
    forall ?' : D -> FiniteInstrumentComp n PUnit.{1},
      (forall o, TTObservationToken.Holds TTContinuation.resultCode
        (sources o) (?' (?.value o))) ->

Lean 4 source (lines 1201–1230)

TTObservationToken.Holds TTContinuation.resultCode u (?.bind ?') := by
classical
let atomSources (p : {a // a in u}) :
  ?.Outcome -> TTObservationToken n :=
  Classical.choose (exists_bind_source_atoms ? p.1 ? (hu p.1 p.2))
have atomSources_spec (p : {a // a in u}) :
  (forall o, TTObservationToken.Holds TTContinuation.resultCode
    (atomSources p o) (? (?.value o))) /\
  forall ?' : D -> FiniteInstrumentComp n PUnit.{1},
    (forall o, TTObservationToken.Holds TTContinuation.resultCode
      (atomSources p o) (?' (?.value o))) ->
    TTObservationToken.Holds TTContinuation.resultCode p.1 (?.bind ?') :=
  Classical.choose_spec
    (exists_bind_source_atoms ? p.1 ? (hu p.1 p.2))
let sources : ?.Outcome -> TTObservationToken n := fun o =>
  u.attach.flatMap fun p => atomSources p o
refine <sources, ?_, ?_>
* intro o b hb
  obtain <p, hp, hbp> := List.mem_flatMap.mp hb
  exact (atomSources_spec p).1 o b hbp
* intro ?' hsources a ha
  let p : {a // a in u} := <a, ha>
  apply (atomSources_spec p).2 ?'
  intro o b hb
  apply hsources o b
  exact List.mem_flatMap.mpr <p, by simp, hb>

end TTResultApproximation

end QLambda

```

A.66 QLambda/TTResultOperations.lean

266 lines.

Lean 4 source

```
/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/
import QLambda.TTContinuationMonad
import QLambda.TTResultAlgebra
import QLambda.TTResultApproximation
import QLambda.TTTokenTheoryOperations

open Set

namespace QLambda

open Scott1972.ContinuousLattice

universe u

namespace TTTokenTheory

variable {n : Nat}

private def resultCode : OutputCode Nat PUnit.{1} :=
  TTContinuation.resultCode

/-- Semantic token derivation for trace-nonincreasing Kraus precomposition on
the fixed result theory. -/
def PrecomposeDerives (? : QuantumOperation n n)
  (s t : TTObservationToken n) : Prop :=
  forall ? : FiniteInstrumentComp n PUnit.{1},
    TTObservationToken.Holds resultCode s ? ->
    TTObservationToken.Holds resultCode t (?..precomposeResult ?)

/-- Scott-continuous TNI precomposition on the rounded result domain. -/
noncomputable def precomposeResultScott (? : QuantumOperation n n) :
  ScottMap (TTContinuation.TTResult n) (TTContinuation.TTResult n) :=
  mapOfDerivation resultCode resultCode (PrecomposeDerives ?)

theorem mem_precomposeResultScott {? : QuantumOperation n n}
  {T : TTContinuation.TTResult n} {t : TTObservationToken n} :
  t in precomposeResultScott ? T <->
    exists s in T, exists u, PrecomposeDerives ? s u /\
      TTObservationToken.RoundedBelow resultCode t u := by
  dsimp [precomposeResultScott, mapOfDerivation, RoundedTheory.extendRelation]
  exact RoundedTheory.mem_extendRelation
    (B := TTObservationToken.roundedBasis (n := n) resultCode)
    (C := TTObservationToken.roundedBasis (n := n) resultCode)

theorem precomposeResultScott_mono (? : QuantumOperation n n) :
  Monotone (precomposeResultScott ?) := by
  intro T T' hTT' t ht
  obtain <s, hs, u, hst, ht> := (mem_precomposeResultScott (? := ?)).mp ht
  exact (mem_precomposeResultScott (? := ?)).2
    <s, hTT' hs, u, hst, ht>

theorem precomposeResultScott_satisfiedTTTheory
  (? : QuantumOperation n n) (? : FiniteInstrumentComp n PUnit.{1}) :
  precomposeResultScott ? (?..satisfiedTTTheory resultCode) =
```

```

    (? .precomposeResult ?) .satisfiedTTTheory resultCode := by
  apply RoundedTheory.ext
  ext t
  constructor
  * intro ht
    obtain <s, hs, u, hst, htu> := (mem_precomposeResultScott (? := ?)) .mp ht
    have hc :
      TTObservationToken.Holds resultCode u (? .precomposeResult ?) :=
        hst _ ((FiniteInstrumentComp.mem_satisfiedTTTheory resultCode ? s) .mp hs)
    exact TTObservationToken.roundedBelow_entails resultCode htu
      (? .precomposeResult ?) hc
  * intro ht
    obtain <u, htu, hu> :=
      TTObservationToken.exists_stronglyBelow_holds resultCode
        (? .precomposeResult ?) ht
    obtain <s, hs, hall> :=
      TTResultApproximation.exists_precompose_source_token ? u ? hu
    apply (mem_precomposeResultScott (? := ?)) .2
    refine <s, (FiniteInstrumentComp.mem_satisfiedTTTheory resultCode ? s) .2 hs,
      u, ?_, ?_>
  * intro ?' hs'
    exact hall ?' hs'
  * exact <t, TTObservationToken.entails_refl resultCode t, htu>

variable {D : Type u} [CompleteLattice D]

/-- Continuations presented on the values returned by a finite instrument. -/
def PresentedOnValues (? : FiniteInstrumentComp n D)
  (k : ScottMap D (TTContinuation.TTResult n)) : Type (max u 1) :=
  {? : D -> FiniteInstrumentComp n PUnit.{1} //
    forall o : ?.Outcome, (? (? .value o)) .satisfiedTTTheory resultCode <= k (? .value o)}

namespace PresentedOnValues

variable {? : FiniteInstrumentComp n D}
variable {k : ScottMap D (TTContinuation.TTResult n)}

def mk (? : D -> FiniteInstrumentComp n PUnit.{1})
  (h? : forall o : ?.Outcome,
    (? (? .value o)) .satisfiedTTTheory resultCode <= k (? .value o)) :
  PresentedOnValues ? k :=
  <?, h?>

def val (? : PresentedOnValues ? k) : D -> FiniteInstrumentComp n PUnit.{1} :=
  ?.1

end PresentedOnValues

/-- Exact finite-instrument aggregation on the result theory. -/
noncomputable def bindPresented (? : FiniteInstrumentComp n D)
  {k : ScottMap D (TTContinuation.TTResult n)}
  (? : PresentedOnValues ? k) : TTContinuation.TTResult n :=
  (? .bind ? .val) .satisfiedTTTheory resultCode

theorem bindPresented_eq_of_values (? : FiniteInstrumentComp n D)
  {?_1 ?_2 : D -> FiniteInstrumentComp n PUnit.{1}}
  (h : forall o : ?.Outcome, ?_1 (? .value o) = ?_2 (? .value o)) :
  (? .bind ?_1) .satisfiedTTTheory resultCode =
  (? .bind ?_2) .satisfiedTTTheory resultCode :=
  FiniteInstrumentComp.bindPresented_eq_of_values ? h

/-- Branch-local finite observations which semantically force a target
observation after binding the fixed instrument. -/

```

```

def AggregateDerives (? : FiniteInstrumentComp n D)
  (sources : ?.Outcome -> TTObservationToken n)
  (target : TTObservationToken n) : Prop :=
  forall ? : D -> FiniteInstrumentComp n PUnit.{1},
  (forall o, TTObservationToken.Holds resultCode
    (sources o) (? (? .value o))) ->
  TTObservationToken.Holds resultCode target (? .bind ?)

private def resultBasis (n : Nat) :=
  TTObservationToken.roundedBasis (n := n) resultCode

/-- Rounded result theory generated by finite branch-local observations. -/
noncomputable def aggregateResult (? : FiniteInstrumentComp n D)
  (k : ScottMap D (TTContinuation.TTResult n)) :
  TTContinuation.TTResult n :=
  sSup {T | exists sources target,
    (forall o, sources o in k (? .value o)) /\
    AggregateDerives ? sources target /\
    T = RoundedTheory.principal (resultBasis n) target}

theorem mem_aggregateResult (? : FiniteInstrumentComp n D)
  (k : ScottMap D (TTContinuation.TTResult n))
  (t : TTObservationToken n) :
  t in aggregateResult ? k <->
  exists sources, (forall o, sources o in k (? .value o)) /\
  exists target, AggregateDerives ? sources target /\
  TTObservationToken.RoundedBelow resultCode t target := by
  rw [aggregateResult, RoundedTheory.mem_sSup]
  constructor
  * rintro <T, <sources, target, hsources, hderives, rfl>, ht>
  exact <sources, hsources, target, hderives,
    (RoundedTheory.mem_principal (B := resultBasis n)).mp ht>
  * rintro <sources, hsources, target, hderives, ht>
  exact <RoundedTheory.principal (resultBasis n) target,
    <sources, target, hsources, hderives, rfl>,
    (RoundedTheory.mem_principal (B := resultBasis n)).2 ht>

theorem aggregateResult_sSup (? : FiniteInstrumentComp n D)
  {S : Set (ScottMap D (TTContinuation.TTResult n))}
  (hS : S.Nonempty) (hdir : DirectedOn (* <= *) S) :
  aggregateResult ? (sSup S) =
  sSup (aggregateResult ? ' S) := by
  classical
  apply RoundedTheory.ext
  ext t
  change t in aggregateResult ? (sSup S) <->
  t in (sSup (aggregateResult ? ' S) : TTContinuation.TTResult n)
  rw [RoundedTheory.mem_sSup]
  constructor
  * intro ht
  obtain <sources, hsources, target, hderives, httarget> :=
    (mem_aggregateResult ? (sSup S) t).mp ht
  have hpoint (o : ?.Outcome) :
    exists i : S, sources o in
      (i.1 : ScottMap D (TTContinuation.TTResult n)) (? .value o) := by
    have hs := hsources o
    rw [ScottMap.sSup_apply, RoundedTheory.mem_sSup] at hs
    obtain <T, <i, hi, rfl>, hsT> := hs
    exact <<i, hi>, hsT>
  obtain <k_0, hk_0> := hS
  have hfin :
    forall F : Finset ?.Outcome,
      exists i : S, forall o in F, sources o in

```

```

      (i.1 : ScottMap D (TTContinuation.TTResult n)) (?.value o) := by
intro F
induction F using Finset.induction_on with
| empty =>
  exact <<k_0, hk_0>, by simp>
| @insert o F ho ih =>
  obtain <<i, hi>, hsi> := ih
  obtain <<j, hj>, hsj> := hpoint o
  obtain <z, hz, hiz, hjz> := hdir i hi j hj
  refine <<z, hz>, ?_>
  intro o' ho'
  rw [Finset.mem_insert] at ho'
  rcases ho' with rfl | ho'
  * exact hjz (?.value o') hsj
  * exact hiz (?.value o') (hsi o' ho')
obtain <<i, hi>, hsi> := hfin Finset.univ
have ht_i : t in aggregateResult ? i :=
  (mem_aggregateResult ? i t).2
  <sources, fun o => hsi o (Finset.mem_univ o),
  target, hderives, httarget>
exact <aggregateResult ? i, <i, hi, rfl>, ht_i>
* rintro <T, <i, hi, rfl>, ht>
obtain <sources, hsources, target, hderives, httarget> :=
  (mem_aggregateResult ? i t).mp ht
apply (mem_aggregateResult ? (sSup S) t).2
refine <sources, ?_, target, hderives, httarget>
intro o
exact (le_sSup hi (?.value o)) (hsources o)

/-- Scott-continuous finite-instrument aggregation on the rounded result
domain. -/
noncomputable def bindResultScott (? : FiniteInstrumentComp n D) :
  ScottMap (ScottMap D (TTContinuation.TTResult n))
  (TTContinuation.TTResult n) :=
  <aggregateResult ?, continuous_of_preservesDirectedSup fun _ hS hdir =>
  aggregateResult_sSup ? hS hdir>

@[simp]
theorem bindResultScott_apply (? : FiniteInstrumentComp n D)
  (k : ScottMap D (TTContinuation.TTResult n)) :
  bindResultScott ? k = aggregateResult ? k :=
  rfl

theorem bindResultScott_satisfied
  (? : FiniteInstrumentComp n D)
  (? : D -> FiniteInstrumentComp n PUnit.{1})
  (k : ScottMap D (TTContinuation.TTResult n))
  (hk : forall o : ?.Outcome,
    k (?.value o) =
      (? (?.value o)).satisfiedTTTheory resultCode) :
  bindResultScott ? k =
    (? .bind ?).satisfiedTTTheory resultCode := by
  apply RoundedTheory.ext
  ext t
  constructor
  * intro ht
  obtain <sources, hsources, target, hderives, httarget> :=
    (mem_aggregateResult ? k t).mp ht
  have htarg : TTObservationToken.Holds resultCode target (? .bind ?) :=
    hderives ? fun o =>
      (FiniteInstrumentComp.mem_satisfiedTTTheory resultCode
        (? (?.value o)) (sources o)).mp
        (by rw [← hk o]; exact hsources o)

```

```

    exact TTObservationToken.roundedBelow_entails resultCode
      httarget (? .bind ?) htarget
* intro ht
  obtain <target, httarget, htarget> :=
    TTObservationToken.exists_stronglyBelow_holds
      resultCode (? .bind ?) ht
  obtain <sources, hsources, hderives> :=
    TTResultApproximation.exists_bind_source_tokens ? target ? htarget
  apply (mem_aggregateResult ? k t).2
  refine <sources, ?_, target, hderives, ?_>
* intro o
  rw [hk o]
  exact (FiniteInstrumentComp.mem_satisfiedTTTheory resultCode
    (? (? .value o)) (sources o)).2 (hsources o)
* exact <t, TTObservationToken.entails_refl resultCode t, httarget>

end TTokenTheory

end QLambda

```

A.67 QLambda/TToundedTheory.lean

302 lines.

Lean 4 source

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/
import QLambda.RoundedTheoryOmega
import QLambda.TTRefinement

open Set

namespace QLambda

open Scott1972.ContinuousLattice

universe u

namespace TTObservationAtom

variable {n : Nat}

/-- Strict strengthening of a TT atom: the postcondition code and rational
vector are unchanged while the threshold strictly increases. -/
def StronglyBelow (a b : TTObservationAtom n) : Prop :=
  a.post = b.post /\ a.choi.1 = b.choi.1 /\ a.choi.2.1 < b.choi.2.1

theorem stronglyBelow_trans {a b c : TTObservationAtom n}
  (hab : StronglyBelow a b) (hbc : StronglyBelow b c) :
  StronglyBelow a c :=
  <hab.1.trans hbc.1, hab.2.1.trans hbc.2.1,
  hab.2.2.trans hbc.2.2>

theorem stronglyBelow_interpolate {a c : TTObservationAtom n}
  (hac : StronglyBelow a c) :
  exists b, StronglyBelow a b /\ StronglyBelow b c := by
  let q : ? := (a.choi.2.1 + c.choi.2.1) / 2
  have hq0 : 0 <= q := by

```



```

    have ha0 := a.choi.2.2
    have hc0 := c.choi.2.2
    dsimp [q]
    linarith
let b : TTObservationAtom n :=
  <a.post, (a.choi.1, <q, hq0>)>
refine <b, ?_, ?_>
* exact <rfl, rfl, by dsimp [b, q]; linarith [hac.2.2]>
* exact <hac.1, hac.2.1, by dsimp [b, q]; linarith [hac.2.2]>

theorem stronglyBelow_holds {D : Type u} [CompleteLattice D]
  (C : OutputCode Nat D) {a b : TTObservationAtom n}
  (hab : StronglyBelow a b) {? : FiniteInstrumentComp n D}
  (hb : Holds C b ?) : Holds C a ? := by
  apply holds_of_threshold_le C hab.1 hab.2.1
* change (a.choi.2.1 : ?) <= (b.choi.2.1 : ?)
  exact_mod_cast hab.2.2.le
* exact hb

end TTObservationAtom

namespace TTObservationToken

variable {n : Nat}

/-- Pointwise strict strengthening of every TT conjunct. -/
def StronglyBelow (t s : TTObservationToken n) : Prop :=
  forall a in t, exists b in s, TTObservationAtom.StronglyBelow a b

theorem stronglyBelow_trans {t s r : TTObservationToken n}
  (hts : StronglyBelow t s) (hsr : StronglyBelow s r) :
  StronglyBelow t r := by
  intro a ha
  obtain <b, hb, hab> := hts a ha
  obtain <c, hc, hbc> := hsr b hb
  exact <c, hc, TTObservationAtom.stronglyBelow_trans hab hbc>

theorem stronglyBelow_interpolate {t r : TTObservationToken n}
  (htr : StronglyBelow t r) :
  exists s, StronglyBelow t s /\ StronglyBelow s r := by
  induction t with
  | nil =>
    exact <[], by simp [StronglyBelow], by simp [StronglyBelow]>
  | cons a t ih =>
    obtain <c, hc, hac> := htr a (by simp)
    obtain <b, hab, hbc> :=
      TTObservationAtom.stronglyBelow_interpolate hac
    have htr' : StronglyBelow t r := by
      intro x hx
      exact htr x (by simp [hx])
    obtain <s, hts, hsr> := ih htr'
    refine <b :: s, ?_, ?_>
    * intro x hx
      rcases List.mem_cons.mp hx with rfl | hx
      * exact <b, by simp, hab>
      * obtain <y, hy, hxy> := hts x hx
        exact <y, by simp [hy], hxy>
    * intro x hx
      rcases List.mem_cons.mp hx with rfl | hx
      * exact <c, hc, hbc>
      * exact hsr x hx

/-- Semantic entailment between TT observation tokens. -/

```

```

def Entails {D : Type u} [CompleteLattice D] (C : OutputCode Nat D)
  (t s : TTObservationToken n) : Prop :=
  forall ? : FiniteInstrumentComp n D, Holds C s ? -> Holds C t ?

theorem entails_refl {D : Type u} [CompleteLattice D]
  (C : OutputCode Nat D) (t : TTObservationToken n) :
  Entails C t t :=
  fun _ h => h

theorem entails_trans {D : Type u} [CompleteLattice D]
  (C : OutputCode Nat D) {t s r : TTObservationToken n}
  (hts : Entails C t s) (hsr : Entails C s r) :
  Entails C t r :=
  fun ? hr => hts ? (hsr ? hr)

theorem stronglyBelow_entails {D : Type u} [CompleteLattice D]
  (C : OutputCode Nat D) {t s : TTObservationToken n}
  (hts : StronglyBelow t s) : Entails C t s := by
  intro ? hs a ha
  obtain <b, hb, hab> := hts a ha
  exact TTObservationTokenAtom.stronglyBelow_holds C hab (hs b hb)

/-- Semantic weakening followed by strict rational strengthening. -/
def RoundedBelow {D : Type u} [CompleteLattice D] (C : OutputCode Nat D)
  (t s : TTObservationToken n) : Prop :=
  exists u, Entails C t u /\ StronglyBelow u s

theorem roundedBelow_entails {D : Type u} [CompleteLattice D]
  (C : OutputCode Nat D) {t s : TTObservationToken n}
  (hts : RoundedBelow C t s) : Entails C t s := by
  obtain <u, ht_u, hus> := hts
  exact entails_trans C ht_u (stronglyBelow_entails C hus)

theorem roundedBelow_trans {D : Type u} [CompleteLattice D]
  (C : OutputCode Nat D) {t s r : TTObservationToken n}
  (hts : RoundedBelow C t s) (hsr : RoundedBelow C s r) :
  RoundedBelow C t r := by
  obtain <v, hsv, hvr> := hsr
  exact <v, entails_trans C (roundedBelow_entails C hts) hsv, hvr>

theorem roundedBelow_interpolate {D : Type u} [CompleteLattice D]
  (C : OutputCode Nat D) {t r : TTObservationToken n}
  (htr : RoundedBelow C t r) :
  exists s, RoundedBelow C t s /\ RoundedBelow C s r := by
  obtain <u, ht_u, hur> := htr
  obtain <s, hus, hsr> := stronglyBelow_interpolate hur
  refine <s, <u, ht_u, hus>, ?_>
  exact <s, entails_refl C s, hsr>

/-- The interpolative basis of TT observation tokens. -/
def roundedBasis {D : Type u} [CompleteLattice D]
  (C : OutputCode Nat D) : AbstractBasis (TTObservationToken n) where
  below := RoundedBelow C
  trans := roundedBelow_trans C
  interpolate := roundedBelow_interpolate C

end TTObservationToken

/-- The saturated rounded-theory completion of TT observation tokens. -/
abbrev TTTOKENTheory (n : Nat) {D : Type u} [CompleteLattice D]
  (C : OutputCode Nat D) :=
  RoundedTheory.Carrier (TTObservationToken.roundedBasis (n := n) C)

```

```

/-- The TT token-theory completion is a continuous lattice. -/
theorem ttTokenTheory_isContinuousLattice
  (n : Nat) {D : Type u} [CompleteLattice D] (C : OutputCode Nat D) :
  IsContinuousLattice (TTTokenTheory n C) :=
  RoundedTheory.isContinuousLattice
  (TTObservationToken.roundedBasis (n := n) C)

/-- TT token theories form an `?QVA`. -/
@[instance_reducible] noncomputable def ttTokenTheory_isOmegaQVA
  (n : Nat) {D : Type u} [CompleteLattice D] (C : OutputCode Nat D) :
  IsOmegaQVA (TTTokenTheory n C) :=
  RoundedTheory.isOmegaQVA
  (TTObservationToken.roundedBasis (n := n) C)

noncomputable instance TTTTokenTheory_instIsOmegaQVA
  (n : Nat) {D : Type u} [CompleteLattice D] (C : OutputCode Nat D) :
  IsOmegaQVA (TTTokenTheory n C) :=
  ttTokenTheory_isOmegaQVA n C

namespace TTObservationAtom

variable {n : Nat} {D : Type u} [CompleteLattice D]

/-- Every satisfied TT atom has a strict rational strengthening which is
still satisfied. -/
theorem exists_stronglyBelow_holds (C : OutputCode Nat D)
  (? : FiniteInstrumentComp n D) {a : TTObservationAtom n}
  (ha : Holds C a ?) :
  exists b, StronglyBelow a b /\ Holds C b ? := by
  have hlt :
    (a.choi.threshold : ?) <
    a.choi.eval (KrausFamily.choi (?wpKraus (a.post.decode C))) :=
    ha
  obtain <q, haq, hqeval> := exists_rat_btwn hlt
  have hq0 : 0 <= q := by
    have ha0 : (0 : ?) <= (a.choi.2.1 : ?) := by
      exact_mod_cast a.choi.2.2
    have hq0r : (0 : ?) <= (q : ?) := ha0.trans haq.le
    exact_mod_cast hq0r
  let b : TTObservationAtom n :=
    <a.post, (a.choi.1, <q, hq0>>>
  refine <b, ?_, ?_>
  * exact <rfl, rfl, by
    dsimp [b]
    change (a.choi.2.1 : ?) < (q : ?) at haq
    have haqrat : a.choi.2.1 < q := by
      exact_mod_cast haq
    exact haqrat>
  * change (q : ?) <
    a.choi.eval (KrausFamily.choi (?wpKraus (a.post.decode C)))
    exact hqeval

end TTObservationAtom

namespace TTObservationToken

variable {n : Nat} {D : Type u} [CompleteLattice D]

/-- Strictly strengthen every conjunct of a satisfied TT token. -/
theorem exists_stronglyBelow_holds (C : OutputCode Nat D)
  (? : FiniteInstrumentComp n D) {t : TTObservationToken n}
  (ht : Holds C t ?) :
  exists s, StronglyBelow t s /\ Holds C s ? := by

```

```

induction t with
| nil =>
  exact <[], by simp [StronglyBelow], nil_holds C ?>
| cons a t ih =>
  have ha : a.Holds C ? := ht a (by simp)
  have ht' : Holds C t ? := by
    intro x hx
    exact ht x (by simp [hx])
  obtain <b, hab, hb> :=
    TTObservationAtom.exists_stronglyBelow_holds C ? ha
  obtain <s, hts, hs> := ih ht'
  refine <b :: s, ?_, ?_>
  * intro x hx
    rcases List.mem_cons.mp hx with rfl | hx
    * exact <b, by simp, hab>
    * obtain <y, hy, hxy> := hts x hx
      exact <y, by simp [hy], hxy>
  * intro y hy
    rcases List.mem_cons.mp hy with rfl | hy
    * exact hb
    * exact hs y hy

end TTObservationToken

namespace FiniteInstrumentComp

variable {n : Nat} {D : Type u} [CompleteLattice D]

/-- The rounded theory of all TT observation tokens satisfied by a finite
instrument. -/
def satisfiedTTTheory (C : OutputCode Nat D) (? : FiniteInstrumentComp n D) :
  TTTTokenTheory n C where
  carrier := {t | TTObservationToken.Holds C t ?}
  rounded := by
    apply Set.Subset.antisymm
  * rintro t <s, hs, hts>
    exact TTObservationToken.roundedBelow_entails C hts ? hs
  * intro t ht
    obtain <s, hts, hs> :=
      TTObservationToken.exists_stronglyBelow_holds C ? ht
    exact <s, hs, <t, TTObservationToken.entails_refl C t, hts>>

@[simp]
theorem mem_satisfiedTTTheory (C : OutputCode Nat D)
  (? : FiniteInstrumentComp n D) (t : TTObservationToken n) :
  t in ?.satisfiedTTTheory C <-> TTObservationToken.Holds C t ? :=
  Iff.rfl

/-- Theory inclusion is exactly finitary TT refinement. -/
theorem satisfiedTTTheory_le_iff_finitaryTTRefines
  (C : OutputCode Nat D) {? ? : FiniteInstrumentComp n D} :
  ?.satisfiedTTTheory C <= ?.satisfiedTTTheory C <->
  FinitaryTTRefines C ? ? := by
  rw [finitaryTTRefines_iff_token_holds]
  rfl

/-- Equality of satisfied TT theories is exactly mutual finitary TT
refinement. -/
theorem satisfiedTTTheory_eq_iff_mutual_finitaryTTRefines
  (C : OutputCode Nat D) {? ? : FiniteInstrumentComp n D} :
  ?.satisfiedTTTheory C = ?.satisfiedTTTheory C <->
  FinitaryTTRefines C ? ? /\ FinitaryTTRefines C ? ? := by
  constructor

```

```

* intro h
  constructor
* rw [ <- satisfiedTTTheory_le_iff_finitaryTTRefines C]
  exact h.le
* rw [ <- satisfiedTTTheory_le_iff_finitaryTTRefines C]
  exact h.ge
* rintro <h??. h??>
  apply le_antisymm
* exact (satisfiedTTTheory_le_iff_finitaryTTRefines C).2 h??
* exact (satisfiedTTTheory_le_iff_finitaryTTRefines C).2 h??

end FiniteInstrumentComp

end QLambda

```

A.68 QLambda/TTTokenTheoryOperations.lean

424 lines.

Lean 4 source (lines 1–400)

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/
import QLambda.RoundedTheoryMorphisms
import QLambda.TTRoundedTheory

open Set

namespace QLambda

open Scott1972.ContinuousLattice

universe u

/-- Exact closure of chosen output codes under pullback along a Scott map. -/
structure OutputCodeHom {D E : Type u} [CompleteLattice D] [CompleteLattice E]
  (C : OutputCode Nat D) (C' : OutputCode Nat E) (f : ScottMap D E) where
  pull : Nat -> Nat
  observe_pull : forall i, C.observe (pull i) = OutputObservation.preimage f (C'.observe i)

/-- Exact closure of finite rational postconditions under a finite
instrument continuation. -/
structure BindCodeHom {n : Nat} {D E : Type u}
  [CompleteLattice D] [CompleteLattice E]
  (C : OutputCode Nat D) (C' : OutputCode Nat E)
  (k : D -> FiniteInstrumentComp n E) where
  pullPost : RatStepPostCode n -> RatStepPostCode n
  wp_semEq : forall c d,
    KrausFamily.SemEq ((k d).wpKraus (c.decode C'))
    ((pullPost c).decode C d)

namespace OutputCodeHom

variable {D E F : Type u}
variable [CompleteLattice D] [CompleteLattice E] [CompleteLattice F]
variable {C : OutputCode Nat D} {C' : OutputCode Nat E} {C'' : OutputCode Nat F}
variable {f : ScottMap D E} {g : ScottMap E F}

/-- Pull a rational finite-step postcondition through a code-compatible map. -/
def pullPost (h : OutputCodeHom C C' f) {n : Nat}

```

```

    (c : RatStepPostCode n) : RatStepPostCode n where
    arity := c.arity
    opens := h.pull comp c.opens
    table := c.table
    table_mono := c.table_mono

theorem signature_pullPost (h : OutputCodeHom C C' f) {n : Nat}
  (c : RatStepPostCode n) (d : D) :
  (h.pullPost c).signature C d = c.signature C' (f d) := by
  classical
  funext i
  change (if d in C.observe (h.pull (c.opens i)) then true else false) =
    if f d in C'.observe (c.opens i) then true else false
  rw [h.observe_pull]
  rfl

theorem decode_pullPost (h : OutputCodeHom C C' f) {n : Nat}
  (c : RatStepPostCode n) (d : D) :
  (h.pullPost c).decode C d = c.decode C' (f d) := by
  change (h.pullPost c).decodedKraus C d =
    c.decodedKraus C' (f d)
  unfold RatStepPostCode.decodedKraus RatStepPostCode.decodedOperation
  RatStepPostCode.decodedTNI RatTNICPMatrix.toQuantumOperation
  RatTNICPMatrix.realize
  rw [signature_pullPost]
  rfl

def pullAtom (h : OutputCodeHom C C' f) {n : Nat}
  (a : TTObservationAtom n) : TTObservationAtom n :=
  <h.pullPost a.post, a.choi>

def pullToken (h : OutputCodeHom C C' f) {n : Nat}
  (t : TTObservationToken n) : TTObservationToken n :=
  t.map h.pullAtom

theorem holds_map_iff (h : OutputCodeHom C C' f) {n : Nat}
  (a : TTObservationAtom n) (? : FiniteInstrumentComp n D) :
  TTObservationAtom.Holds C' a (? .map f) <=>
  TTObservationAtom.Holds C (h.pullAtom a) ? := by
  have hdecode :
    a.post.decode C' comp (f : D -> E) = (h.pullPost a.post).decode C := by
  funext d
  exact (decode_pullPost h a.post d).symm
  unfold TTObservationAtom.Holds pullAtom
  rw [FiniteInstrumentComp.wpKraus_map, hdecode]

theorem token_holds_map_iff (h : OutputCodeHom C C' f) {n : Nat}
  (t : TTObservationToken n) (? : FiniteInstrumentComp n D) :
  TTObservationToken.Holds C' t (? .map f) <=>
  TTObservationToken.Holds C (h.pullToken t) ? := by
  constructor
  * intro ht a ha
  obtain <b, hb, rfl> := List.mem_map.mp ha
  exact (holds_map_iff h b ?).mp (ht b hb)
  * intro ht a ha
  exact (holds_map_iff h a ?).mpr
    (ht (h.pullAtom a) (List.mem_map.mpr <a, ha, rfl>))

end OutputCodeHom

namespace BindCodeHom

variable {n : Nat} {D E : Type u}

```

```

variable [CompleteLattice D] [CompleteLattice E]
variable {C : OutputCode Nat D} {C' : OutputCode Nat E}
variable {k : D -> FiniteInstrumentComp n E}

def pullAtom (h : BindCodeHom C C' k)
  (a : TTObservationAtom n) : TTObservationAtom n :=
  <h.pullPost a.post, a.choi>

def pullToken (h : BindCodeHom C C' k)
  (t : TTObservationToken n) : TTObservationToken n :=
  t.map h.pullAtom

theorem holds_bind_iff (h : BindCodeHom C C' k)
  (a : TTObservationAtom n) (? : FiniteInstrumentComp n D) :
  TTObservationAtom.Holds C' a (? .bind k) <=>
  TTObservationAtom.Holds C (h.pullAtom a) ? := by
  have hsem :
    KrausFamily.SemEq ((? .bind k).wpKraus (a.post.decode C'))
      (? .wpKraus ((h.pullPost a.post).decode C)) :=
    KrausFamily.applySemEq_trans
      (FiniteInstrumentComp.wpKraus_bind_semEq ? k (a.post.decode C'))
      (FiniteInstrumentComp.wpKraus_semEq_pred ? fun d =>
        h.wp_semEq a.post d)
  have hchoi := KrausFamily.choi_eq_of_semEq hsem
  unfold TTObservationAtom.Holds pullAtom
  rw [hchoi]

theorem token_holds_bind_iff (h : BindCodeHom C C' k)
  (t : TTObservationToken n) (? : FiniteInstrumentComp n D) :
  TTObservationToken.Holds C' t (? .bind k) <=>
  TTObservationToken.Holds C (h.pullToken t) ? := by
  constructor
  * intro ht a ha
    obtain <b, hb, rfl> := List.mem_map.mp ha
    exact (holds_bind_iff h b ?).mp (ht b hb)
  * intro ht a ha
    exact (holds_bind_iff h a ?).mpr
      (ht (h.pullAtom a) (List.mem_map.mpr <a, ha, rfl>))

end BindCodeHom

namespace FiniteInstrumentComp

variable {n : Nat} {D E : Type u}
variable [CompleteLattice D] [CompleteLattice E]
variable {C : OutputCode Nat D} {C' : OutputCode Nat E}
variable {f : ScottMap D E}

theorem finitaryTTRefines_map (h : OutputCodeHom C C' f)
  {? ? : FiniteInstrumentComp n D}
  (h?? : FinitaryTTRefines C ? ?) :
  FinitaryTTRefines C' (? .map f) (? .map f) := by
  intro c
  have hpull := h?? (h.pullPost c)
  have hdecode :
    c.decode C' comp (f : D -> E) = (h.pullPost c).decode C := by
    funext d
    exact (OutputCodeHom.decode_pullPost h c d).symm
  rw [wpKraus_map, wpKraus_map, hdecode]
  exact hpull

theorem finitaryTTRefines_bind_left
  {k : D -> FiniteInstrumentComp n E}

```

```

(h : BindCodeHom C C' k)
{? ? : FiniteInstrumentComp n D}
(h?? : FinitaryTTRefines C ? ?) :
FinitaryTTRefines C' (? .bind k) (? .bind k) := by
intro c
exact KrausFamily.residualRefines_trans
  (KrausFamily.residualRefines_of_semEq <|
    KrausFamily.applySemEq_trans
      (wpKraus_bind_semEq ? k (c.decode C'))
      (wpKraus_semEq_pred ? fun d => h.wp_semEq c d))
  (KrausFamily.residualRefines_trans
    (h?? (h.pullPost c))
    (KrausFamily.residualRefines_of_semEq <|
      KrausFamily.applySemEq_symm <|
        KrausFamily.applySemEq_trans
          (wpKraus_bind_semEq ? k (c.decode C'))
          (wpKraus_semEq_pred ? fun d => h.wp_semEq c d)))

end FiniteInstrumentComp

namespace TTObservationAtom

variable {n : Nat} {D : Type u} [CompleteLattice D]

theorem exists_unit_holds_of_directed (C : OutputCode Nat D)
  (a : TTObservationAtom n) {S : Set D}
  (hS : S.Nonempty) (hdir : DirectedOn (* <= *) S)
  (ha : Holds C a (FiniteInstrumentComp.unit (n := n) (sSup S))) :
exists d in S, Holds C a (FiniteInstrumentComp.unit (n := n) d) := by
obtain <d, hdS, hsig> :=
  RatStepPostCode.exists_signature_eq_of_directed C a.post hS hdir
refine <d, hdS, ?_>
have hpost :
  a.post.decode C d = a.post.decode C (sSup S) := by
change a.post.decodedKraus C d =
  a.post.decodedKraus C (sSup S)
unfold RatStepPostCode.decodedKraus RatStepPostCode.decodedOperation
  RatStepPostCode.decodedTNI RatTNICPMatrix.toQuantumOperation
  RatTNICPMatrix.realize
rw [hsig]
have hchoi :
  KrausFamily.choi
    ((FiniteInstrumentComp.unit (n := n) d).wpKraus
      (a.post.decode C)) =
  KrausFamily.choi
    ((FiniteInstrumentComp.unit (n := n) (sSup S)).wpKraus
      (a.post.decode C)) := by
calc
  KrausFamily.choi
    ((FiniteInstrumentComp.unit (n := n) d).wpKraus
      (a.post.decode C)) =
  KrausFamily.choi (a.post.decode C d) :=
  KrausFamily.choi_eq_of_semEq
    (FiniteInstrumentComp.wpKraus_unit_semEq d (a.post.decode C))
_ = KrausFamily.choi (a.post.decode C (sSup S)) :=
  congrArg KrausFamily.choi hpost
_ = KrausFamily.choi
  ((FiniteInstrumentComp.unit (n := n) (sSup S)).wpKraus
    (a.post.decode C)) :=
  (KrausFamily.choi_eq_of_semEq
    (FiniteInstrumentComp.wpKraus_unit_semEq
      (sSup S) (a.post.decode C))).symm
unfold Holds at ha |-

```



```

    rw [hchoi]
    exact ha

end TTObservationAtom

namespace TTObservationToken

variable {n : Nat} {D : Type u} [CompleteLattice D]

theorem exists_unit_holds_of_directed (C : OutputCode Nat D)
  (t : TTObservationToken n) {S : Set D}
  (hS : S.Nonempty) (hdir : DirectedOn (* <= *) S)
  (ht : Holds C t (FiniteInstrumentComp.unit (n := n) (sSup S))) :
  exists d in S, Holds C t (FiniteInstrumentComp.unit (n := n) d) := by
  induction t with
  | nil =>
    obtain <d, hdS> := hS
    exact <d, hdS, nil_holds C _>
  | cons a t ih =>
    have ha : TTObservationAtom.Holds C a
      (FiniteInstrumentComp.unit (n := n) (sSup S)) :=
      ht a (by simp)
    have ht' : Holds C t
      (FiniteInstrumentComp.unit (n := n) (sSup S)) := by
      intro b hb
      exact ht b (by simp [hb])
    obtain <d, hdS, had> :=
      TTObservationAtom.exists_unit_holds_of_directed C a hS hdir ha
    obtain <e, heS, hte> := ih ht'
    obtain <z, hzS, hdz, hez> := hdir d hdS e heS
    refine <z, hzS, ?_>
    intro b hb
    rcases List.mem_cons.mp hb with rfl | hb
    * exact TTObservationAtom.holds_mono C
      (FiniteInstrumentComp.unit_mono hdz) had
    * exact holds_mono C (FiniteInstrumentComp.unit_mono hez) hte b hb

end TTObservationToken

namespace TTTokenTheory

variable {n : Nat} {D : Type u} [CompleteLattice D]

/-- Deterministic return as a TT theory of finitary observations. -/
noncomputable def unit (C : OutputCode Nat D) (d : D) : TTTokenTheory n C :=
  (FiniteInstrumentComp.unit (n := n) d).satisfiedTTTheory C

theorem mem_unit (C : OutputCode Nat D) (d : D) (t : TTObservationToken n) :
  t in unit (n := n) C d <=>
  TTObservationToken.Holds C t (FiniteInstrumentComp.unit (n := n) d) :=
  Iff.rfl

theorem unit_mono (C : OutputCode Nat D) :
  Monotone (unit (n := n) C) := by
  intro d e hde t ht
  exact TTObservationToken.holds_mono C
    (FiniteInstrumentComp.unit_mono hde) ht

theorem unit_sSup_directed (C : OutputCode Nat D)
  {S : Set D} (hS : S.Nonempty) (hdir : DirectedOn (* <= *) S) :
  unit (n := n) C (sSup S) = sSup (unit (n := n) C '' S) := by
  apply RoundedTheory.ext
  ext t

```

```

change t in unit (n := n) C (sSup S) <->
  t in (sSup (unit (n := n) C ' ' S) : TTTTokenTheory n C)
rw [RoundedTheory.mem_sSup]
constructor
* intro ht
  obtain <d, hdS, htd> :=
    TTObservationToken.exists_unit_holds_of_directed C t hS hdir ht
  exact <unit (n := n) C d, <d, hdS, rfl>, htd>
* rintro <_, <d, hdS, rfl>, htd>
  exact TTObservationToken.holds_mono C
    (FiniteInstrumentComp.unit_mono (le_sSup hdS)) htd

/-- Deterministic return is Scott-continuous for every chosen output code. -/
noncomputable def unitScott (C : OutputCode Nat D) :
  ScottMap D (TTTokenTheory n C) :=
  <unit (n := n) C, continuous_of_preservesDirectedSup fun _ hS hdir =>
    unit_sSup_directed C hS hdir>

@[simp]
theorem unitScott_apply (C : OutputCode Nat D) (d : D) :
  unitScott (n := n) C d = unit (n := n) C d :=
  rfl

/-- A token-derivation relation induces a Scott-continuous TT-theory map. -/
noncomputable def mapOfDerivation
  {E : Type u} [CompleteLattice E]
  (C : OutputCode Nat D) (C' : OutputCode Nat E)
  (R : TTObservationToken n -> TTObservationToken n -> Prop) :
  ScottMap (TTTokenTheory n C) (TTTokenTheory n C') :=
  RoundedTheory.extendRelation
    (TTObservationToken.rounderBasis (n := n) C)
    (TTObservationToken.rounderBasis (n := n) C') R

/-- Token derivation for pushforward along a code-compatible Scott map. -/
def MapDerives
  {E : Type u} [CompleteLattice E]
  {C : OutputCode Nat D} {C' : OutputCode Nat E}
  {f : ScottMap D E} (h : OutputCodeHom C C' f)
  (s t : TTObservationToken n) : Prop :=
  s = h.pullToken t

/-- Pushforward generated by exact pullback of finite TT observations. -/
noncomputable def map
  {E : Type u} [CompleteLattice E]
  (C : OutputCode Nat D) (C' : OutputCode Nat E)
  (f : ScottMap D E) (h : OutputCodeHom C C' f) :
  ScottMap (TTTokenTheory n C) (TTTokenTheory n C') :=
  mapOfDerivation C C' (MapDerives h)

/-- The derivation-generated map agrees exactly with finite pushforward. -/
theorem map_satisfiedTTTheory
  {E : Type u} [CompleteLattice E]
  (C : OutputCode Nat D) (C' : OutputCode Nat E)
  (f : ScottMap D E) (h : OutputCodeHom C C' f)
  (? : FiniteInstrumentComp n D) :
  map C C' f h (?satisfiedTTTheory C) =
    (?map f).satisfiedTTTheory C' := by
  apply RoundedTheory.ext
  ext t
  constructor
* intro ht
  obtain <s, hs, c, hsc, htc> :=
    (RoundedTheory.mem_extendRelation

```

```

      (B := TTObservationToken.roundedBasis (n := n) C)
      (C := TTObservationToken.roundedBasis (n := n) C')).mp ht
subst s
have hc :
  TTObservationToken.Holds C' c (?.map f) :=
  (OutputCodeHom.token_holds_map_iff h c ?).mpr hs
exact TTObservationToken.roundedBelow_entails C' htc (?.map f) hc
* intro ht
obtain <c, htc, hc> :=
  TTObservationToken.exists_stronglyBelow_holds C' (?.map f) ht
apply (RoundedTheory.mem_extendRelation
  (B := TTObservationToken.roundedBasis (n := n) C)
  (C := TTObservationToken.roundedBasis (n := n) C')).2
refine <h.pullToken c,
  (OutputCodeHom.token_holds_map_iff h c ?).mp hc, c, rfl, ?_>
exact <t, TTObservationToken.entails_refl C' t, htc>

/-- Token derivation induced by an exactly representable finite continuation. -/
def BindDerives
  {E : Type u} [CompleteLattice E]
  {C : OutputCode Nat D} {C' : OutputCode Nat E}
  {k : D -> FiniteInstrumentComp n E} (h : BindCodeHom C C' k)
  (s t : TTObservationToken n) : Prop :=
  s = h.pullToken t

/-- Finitary bind generated by pulling TT tokens through a finite continuation. -/
noncomputable def bindFinite
  {E : Type u} [CompleteLattice E]
  (C : OutputCode Nat D) (C' : OutputCode Nat E)
  (k : D -> FiniteInstrumentComp n E) (h : BindCodeHom C C' k) :
  ScottMap (TTTokenTheory n C) (TTTokenTheory n C') :=
  mapOfDerivation C C' (BindDerives h)

/-- The derivation-generated finitary bind agrees with finite instrument bind. -/
theorem bindFinite_satisfiedTTTheory
  {E : Type u} [CompleteLattice E]
  (C : OutputCode Nat D) (C' : OutputCode Nat E)
  (k : D -> FiniteInstrumentComp n E) (h : BindCodeHom C C' k)
  (? : FiniteInstrumentComp n D) :
  bindFinite C C' k h (?.satisfiedTTTheory C) =
  (?.bind k).satisfiedTTTheory C' := by
  apply RoundedTheory.ext
  ext t

```

Lean 4 source (lines 401–424)

```

constructor
* intro ht
obtain <s, hs, c, hsc, htc> :=
  (RoundedTheory.mem_extendRelation
    (B := TTObservationToken.roundedBasis (n := n) C)
    (C := TTObservationToken.roundedBasis (n := n) C')).mp ht
subst s
have hc :
  TTObservationToken.Holds C' c (?.bind k) :=
  (BindCodeHom.token_holds_bind_iff h c ?).mpr hs
exact TTObservationToken.roundedBelow_entails C' htc (?.bind k) hc
* intro ht
obtain <c, htc, hc> :=
  TTObservationToken.exists_stronglyBelow_holds C' (?.bind k) ht
apply (RoundedTheory.mem_extendRelation
  (B := TTObservationToken.roundedBasis (n := n) C)
  (C := TTObservationToken.roundedBasis (n := n) C')).2
refine <h.pullToken c,

```

```

      (BindCodeHom.token_holds_bind_iff h c ?).mp hc, c, rfl, ?_>
exact <t, TTObservationToken.entails_refl C' t, htc>

end TTokenTheory

end QLambda

```

A.69 QLambda/TTWeightedAggregation.lean

442 lines.

Lean 4 source (lines 1–400)

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/
import QLambda.Effects
import QLambda.TTResultOperations

/-!
# Weighted aggregation of TT results

The construction in this file is generated by finite TT observations of a
genuine probabilistic coin instrument. In particular, it is not defined as
lattice join. Endpoints are routed explicitly; this both gives exact endpoint
laws on the completed carrier and avoids pretending that the token basis has
already been proved separating for zero-weight branches.
-/

open Matrix Set
open scoped BigOperators ComplexOrder MatrixOrder

namespace QLambda

open Scott1972.ContinuousLattice

namespace FiniteInstrumentComp

variable {n : Nat}

/-- A two-outcome coin whose branches have CP weights `p` and `1-p`.
The bounds are data because outside `[0,1]` these branches need not form a
trace-nonincreasing instrument. -/
noncomputable def weightedCoin (p : Prob) (hp_0 : 0 <= p) (hp_1 : p <= 1) :
  FiniteInstrumentComp n Bool where
  Outcome := Bool
  branch := fun b =>
    if b then
      KrausFamily.scale (Real.sqrt (1 - p)) (KrausFamily.identity n)
    else
      KrausFamily.scale (Real.sqrt p) (KrausFamily.identity n)
  value := id
  trace_nonincreasing := by
    intro ? h?
    rw [Fintype.sum_bool]
    change
      (Matrix.trace (KrausFamily.applyMat
        (KrausFamily.scale (Real.sqrt (1 - p))
          (KrausFamily.identity n)) ?)).re +
      (Matrix.trace (KrausFamily.applyMat
        (KrausFamily.scale (Real.sqrt p)
          (KrausFamily.identity n)) ?)).re

```

```

      (KrausFamily.identity n)) ?)).re <=
      (Matrix.trace ?).re
    rw [KrausFamily.applyMat_scale, KrausFamily.applyMat_scale,
      KrausFamily.applyMat_identity]
    have hp' : 0 <= 1 - p := sub_nonneg.mpr hp_1
    have hsqrt_p : (Real.sqrt p : ?) * star (Real.sqrt p : ?) = p := by
      simp only [Complex.star_def, Complex.conj_ofReal, <- Complex.ofReal_mul]
      norm_cast
      simp [pow_two] using Real.sq_sqrt hp_0
    have hsqrt_q :
      (Real.sqrt (1 - p) : ?) * star (Real.sqrt (1 - p) : ?) = 1 - p := by
      simp only [Complex.star_def, Complex.conj_ofReal, <- Complex.ofReal_mul]
      norm_cast
      simp [pow_two] using Real.sq_sqrt hp'
    rw [hsqrt_p, hsqrt_q]
    rw [Matrix.trace_smul, Matrix.trace_smul]
    have hre (x : ?) :
      ((x : ?) * Matrix.trace ?).re = x * (Matrix.trace ?).re := by
      rw [smul_eq_mul, Complex.mul_re]
      simp
    rw [ <- Complex.ofReal_one, <- Complex.ofReal_sub]
    rw [hre, hre]
    ring_nf
    exact le_rfl

/-- Physical weighted combination of two finite result instruments. -/
noncomputable def weightedResult
  (p : Prob) (hp_0 : 0 <= p) (hp_1 : p <= 1)
  (? ? : FiniteInstrumentComp n PUnit.{1}) :
  FiniteInstrumentComp n PUnit.{1} :=
  (weightedCoin (n := n) p hp_0 hp_1).bind fun b => if b then ? else ?

end FiniteInstrumentComp

namespace TTWeightedAggregation

variable {n : Nat}

private def resultCode : OutputCode Nat PUnit.{1} :=
  TTContinuation.resultCode

/-- Two branch-local finite observations force a target observation when the
corresponding finite result instruments are physically weighted. -/
def WeightedDerives
  (p : Prob) (hp_0 : 0 <= p) (hp_1 : p <= 1)
  (left right target : TTObservationToken n) : Prop :=
  forall ? ? : FiniteInstrumentComp n PUnit.{1},
  TTObservationToken.Holds resultCode left ? ->
  TTObservationToken.Holds resultCode right ? ->
  TTObservationToken.Holds resultCode target
  (?..weightedResult p hp_0 hp_1 ?)

private def resultBasis (n : Nat) :=
  TTObservationToken.roundedBasis (n := n) resultCode

/-- Interior, token-generated weighted aggregation. -/
noncomputable def core
  (p : Prob) (hp_0 : 0 <= p) (hp_1 : p <= 1)
  (T U : TTContinuation.TTResult n) :
  TTContinuation.TTResult n :=
  sSup {V | exists left in T, exists right in U, exists target,
    WeightedDerives p hp_0 hp_1 left right target /\
    V = RoundedTheory.principal (resultBasis n) target}

```

```

theorem mem_core
  (p : Prob) (hp_0 : 0 <= p) (hp_1 : p <= 1)
  (T U : TTContinuation.TTResult n) (t : TTObservationToken n) :
  t in core p hp_0 hp_1 T U <->
    exists left in T, exists right in U, exists target,
      WeightedDerives p hp_0 hp_1 left right target /\
      TTObservationToken.RoundedBelow resultCode t target := by
rw [core, RoundedTheory.mem_sSup]
constructor
* rintro <V, <left, hleft, right, hright, target, hderives, rfl>, ht>
  exact <left, hleft, right, hright, target, hderives,
    (RoundedTheory.mem_principal (B := resultBasis n)).mp ht>
* rintro <left, hleft, right, hright, target, hderives, ht>
  exact <RoundedTheory.principal (resultBasis n) target,
    <left, hleft, right, hright, target, hderives, rfl>,
    (RoundedTheory.mem_principal (B := resultBasis n)).2 ht>

theorem core_sSup
  (p : Prob) (hp_0 : 0 <= p) (hp_1 : p <= 1)
  {S : Set (TTContinuation.TTResult n x TTContinuation.TTResult n)}
  (hS : S.Nonempty) (hdir : DirectedOn (* <= *) S) :
  core p hp_0 hp_1 (sSup S).1 (sSup S).2 =
    sSup ((fun q => core p hp_0 hp_1 q.1 q.2) '' S) := by
classical
apply RoundedTheory.ext
ext t
change t in core p hp_0 hp_1 (sSup S).1 (sSup S).2 <->
  t in (sSup ((fun q => core p hp_0 hp_1 q.1 q.2) '' S) :
    TTContinuation.TTResult n)
rw [RoundedTheory.mem_sSup]
constructor
* intro ht
  obtain <left, hleft, right, hright, target, hderives, httarget> :=
    (mem_core p hp_0 hp_1 (sSup S).1 (sSup S).2 t).mp ht
  rw [Prod.fst_sSup, RoundedTheory.mem_sSup] at hleft
  rw [Prod.snd_sSup, RoundedTheory.mem_sSup] at hright
  obtain <TL, <qL, hqLS, rfl>, hleft> := hleft
  obtain <UR, <qR, hqRS, rfl>, hright> := hright
  obtain <q, hqS, hLq, hRq> := hdir qL hqLS qR hqRS
  refine <core p hp_0 hp_1 q.1 q.2, <q, hqS, rfl>, ?_>
  exact (mem_core p hp_0 hp_1 q.1 q.2 t).2
    <left, hLq.1 hleft, right, hRq.2 hright,
      target, hderives, httarget>
* rintro <V, <q, hqS, rfl>, ht>
  obtain <left, hleft, right, hright, target, hderives, httarget> :=
    (mem_core p hp_0 hp_1 q.1 q.2 t).mp ht
  apply (mem_core p hp_0 hp_1 (sSup S).1 (sSup S).2 t).2
  refine <left, ?_, right, ?_, target, hderives, httarget>
* rw [Prod.fst_sSup, RoundedTheory.mem_sSup]
  exact <q.1, <q, hqS, rfl>, hleft>
* rw [Prod.snd_sSup, RoundedTheory.mem_sSup]
  exact <q.2, <q, hqS, rfl>, hright>

/-- The interior construction is jointly Scott-continuous in both results. -/
noncomputable def coreScott
  (p : Prob) (hp_0 : 0 <= p) (hp_1 : p <= 1) :
  ScottMap
    (TTContinuation.TTResult n x TTContinuation.TTResult n)
    (TTContinuation.TTResult n) :=
<fun q => core p hp_0 hp_1 q.1 q.2,
  continuous_of_preservesDirectedSup fun _ hS hdir =>
    core_sSup p hp_0 hp_1 hS hdir>

```

```

private noncomputable def fstResult :
  ScottMap
    (TTContinuation.TTResult n x TTContinuation.TTResult n)
    (TTContinuation.TTResult n) :=
  <Prod.fst, continuous_of_preservesDirectedSup fun S _ =>
    Prod.fst_sSup S>

private noncomputable def sndResult :
  ScottMap
    (TTContinuation.TTResult n x TTContinuation.TTResult n)
    (TTContinuation.TTResult n) :=
  <Prod.snd, continuous_of_preservesDirectedSup fun S _ =>
    Prod.snd_sSup S>

/-- Scott-continuous weighted aggregation. Exact endpoints are part of the
definition; strictly interior weights use the token-generated physical
construction. -/
noncomputable def weightedResultScott
  (p : Prob) (hp_0 : 0 <= p) (hp_1 : p <= 1) :
  ScottMap
    (TTContinuation.TTResult n x TTContinuation.TTResult n)
    (TTContinuation.TTResult n) :=
  if p = 0 then sndResult
  else if p = 1 then fstResult
  else coreScott p hp_0 hp_1

@[simp]
theorem weightedResultScott_zero
  (T U : TTContinuation.TTResult n) :
  weightedResultScott (n := n) 0 (le_refl 0) zero_le_one (T, U) = U := by
  simp [weightedResultScott, sndResult]

@[simp]
theorem weightedResultScott_one
  (T U : TTContinuation.TTResult n) :
  weightedResultScott (n := n) 1 zero_le_one (le_refl 1) (T, U) = T := by
  simp [weightedResultScott, fstResult]

/-- At weight zero, weighted aggregation cannot be lattice join whenever the
discarded left result contributes genuinely new information. -/
theorem weightedResultScott_zero_ne_sup
  {T U : TTContinuation.TTResult n} (hTU : not T <= U) :
  weightedResultScott (n := n) 0 (le_refl 0) zero_le_one (T, U) !=
  T sqsup U := by
  intro h
  apply hTU
  have hleft : T <= T sqsup U := le_sup_left
  rw [weightedResultScott_zero] at h
  exact hleft.trans (le_of_eq h.symm)

/-- Symmetrically, at weight one the discarded right result prevents
identification with join whenever it is not already below the left result. -/
theorem weightedResultScott_one_ne_sup
  {T U : TTContinuation.TTResult n} (hUT : not U <= T) :
  weightedResultScott (n := n) 1 zero_le_one (le_refl 1) (T, U) !=
  T sqsup U := by
  intro h
  apply hUT
  have hright : U <= T sqsup U := le_sup_right
  rw [weightedResultScott_one] at h
  exact hright.trans (le_of_eq h.symm)

```

```

theorem weightedResultScott_interior
  (p : Prob) (hp_0 : 0 < p) (hp_1 : p < 1)
  (T U : TTContinuation.TTResult n) :
  weightedResultScott p hp_0.le hp_1.le (T, U) =
    core p hp_0.le hp_1.le T U := by
  simp [weightedResultScott, hp_0.ne', hp_1.ne]
  rfl

/-- The token-generated core agrees exactly with physical weighting whenever
both inputs are represented by finite result instruments. The reverse
inclusion is the substantive direction: finite support is extracted from the
existing bind-approximation theorem for the two-outcome coin. -/
theorem core_satisfiedTTTheory
  (p : Prob) (hp_0 : 0 <= p) (hp_1 : p <= 1)
  (? ? : FiniteInstrumentComp n PUnit.{1}) :
  core p hp_0 hp_1
    (?.satisfiedTTTheory resultCode)
    (?.satisfiedTTTheory resultCode) =
    (?.weightedResult p hp_0 hp_1 ?).satisfiedTTTheory resultCode := by
  apply RoundedTheory.ext
  ext t
  constructor
  * intro ht
    obtain <left, hleft, right, hright, target, hderives, httarget> :=
      (mem_core p hp_0 hp_1
        (?.satisfiedTTTheory resultCode)
        (?.satisfiedTTTheory resultCode) t).mp ht
    have htarget :
      TTObservationToken.Holds resultCode target
        (?.weightedResult p hp_0 hp_1 ?) :=
      hderives ? ?
      ((FiniteInstrumentComp.mem_satisfiedTTTheory resultCode ? left).mp hleft)
      ((FiniteInstrumentComp.mem_satisfiedTTTheory resultCode ? right).mp hright)
    exact TTObservationToken.roundedBelow_entails resultCode httarget
      (?.weightedResult p hp_0 hp_1 ?) htarget
  * intro ht
    obtain <target, httarget, htarget> :=
      TTObservationToken.exists_stronglyBelow_holds resultCode
        (?.weightedResult p hp_0 hp_1 ?) ht
    obtain <sources, hsources, hall> :=
      TTResultApproximation.exists_bind_source_tokens
        (FiniteInstrumentComp.weightedCoin (n := n) p hp_0 hp_1)
        target (fun b => if b then ? else ?) htarget
    let left := sources false
    let right := sources true
    apply (mem_core p hp_0 hp_1
      (?.satisfiedTTTheory resultCode)
      (?.satisfiedTTTheory resultCode) t).2
    refine <left, ?, right, ?, target, ?, ?>
    * apply (FiniteInstrumentComp.mem_satisfiedTTTheory resultCode ? left).2
      simpa [left, resultCode, FiniteInstrumentComp.weightedCoin] using
        hsources false
    * apply (FiniteInstrumentComp.mem_satisfiedTTTheory resultCode ? right).2
      simpa [right, resultCode, FiniteInstrumentComp.weightedCoin] using
        hsources true
    * intro ?' ?' hleft hright
      change TTObservationToken.Holds resultCode target
        ((FiniteInstrumentComp.weightedCoin (n := n) p hp_0 hp_1).bind
          (fun b => if b then ?' else ?'))
      apply hall (fun b => if b then ?' else ?')
      intro b
      cases b
      * exact hleft

```



```

    * exact hright
    * exact <t, TTObservationToken.entails_refl resultCode t, httarget>

/-- Exact finite-instrument agreement for every strictly interior weight. -/
theorem weightedResultScott_satisfied_interior
  (p : Prob) (hp_0 : 0 < p) (hp_1 : p < 1)
  (?? : FiniteInstrumentComp n PUnit.{1}) :
  weightedResultScott p hp_0.le hp_1.le
    (?.satisfiedTTTheory resultCode,
     ?.satisfiedTTTheory resultCode) =
    (?.weightedResult p hp_0.le hp_1.le ?).satisfiedTTTheory resultCode := by
exact Eq.trans
  (weightedResultScott_interior p hp_0 hp_1
    (?.satisfiedTTTheory resultCode)
    (?.satisfiedTTTheory resultCode))
  (core_satisfiedTTTheory p hp_0.le hp_1.le ? ?)

theorem weightedResultScott_bot_left
  (p : Prob) (hp_0 : 0 < p) (hp_1 : p < 1)
  (U : TTContinuation.TTResult n) :
  weightedResultScott p hp_0.le hp_1.le (False, U) = False := by
rw [weightedResultScott_interior p hp_0 hp_1]
apply RoundedTheory.ext
ext t
constructor
* intro ht
  obtain <left, hleft, _> :=
    (mem_core p hp_0.le hp_1.le False U t).mp ht
  have : False := by
    rw [ <- sSup_empty, RoundedTheory.mem_sSup] at hleft
    simpa using hleft
  exact this.elim
* intro ht
  have : False := by
    rw [ <- sSup_empty] at ht
    have ht' := (RoundedTheory.mem_sSup (S := ({}) : Set
      (TTContinuation.TTResult n))))).mp ht
    simpa using ht'
  exact this.elim

theorem weightedResultScott_bot_right
  (p : Prob) (hp_0 : 0 < p) (hp_1 : p < 1)
  (T : TTContinuation.TTResult n) :
  weightedResultScott p hp_0.le hp_1.le (T, False) = False := by
rw [weightedResultScott_interior p hp_0 hp_1]
apply RoundedTheory.ext
ext t
constructor
* intro ht
  obtain <_, _, right, hright, _> :=
    (mem_core p hp_0.le hp_1.le T False t).mp ht
  have : False := by
    rw [ <- sSup_empty, RoundedTheory.mem_sSup] at hright
    simpa using hright
  exact this.elim
* intro ht
  have : False := by
    rw [ <- sSup_empty] at ht
    have ht' := (RoundedTheory.mem_sSup (S := ({}) : Set
      (TTContinuation.TTResult n))))).mp ht
    simpa using ht'
  exact this.elim

```

```
/-- The token-generated interior operation preserves arbitrary (not merely
directed) suprema in the two arguments jointly. -/
```

```
theorem core_sSup_product
  (p : Prob) (hp_0 : 0 <= p) (hp_1 : p <= 1)
  (S U : Set (TTContinuation.TTResult n)) :
  core p hp_0 hp_1 (sSup S) (sSup U) =
    sSup ((fun q => core p hp_0 hp_1 q.1 q.2) '' (S x ? U)) := by
  apply RoundedTheory.ext
  ext t
  change t in core p hp_0 hp_1 (sSup S) (sSup U) <->
    t in (sSup ((fun q => core p hp_0 hp_1 q.1 q.2) '' (S x ? U)) :
      TTContinuation.TTResult n)
  rw [RoundedTheory.mem_sSup]
  constructor
  * intro ht
    obtain <left, hleft, right, hright, target, hderives, httarget> :=
      (mem_core p hp_0 hp_1 (sSup S) (sSup U) t).mp ht
    rw [RoundedTheory.mem_sSup] at hleft hright
    obtain <T, hTS, hleft> := hleft
    obtain <V, hVU, hright> := hright
    refine <core p hp_0 hp_1 T V, ?_, ?_>
    * exact <(T, V), <hTS, hVU>, rfl>
    * exact (mem_core p hp_0 hp_1 T V t).2
      <left, hleft, right, hright, target, hderives, httarget>
  * rintro <W, <<T, V>, <hTS, hVU>, rfl>, ht>
    obtain <left, hleft, right, hright, target, hderives, httarget> :=
      (mem_core p hp_0 hp_1 T V t).mp ht
    apply (mem_core p hp_0 hp_1 (sSup S) (sSup U) t).2
    refine <left, ?_, right, ?_, target, hderives, httarget>
    * rw [RoundedTheory.mem_sSup]
      exact <T, hTS, hleft>
    * rw [RoundedTheory.mem_sSup]
      exact <V, hVU, hright>
```

```
/-- Physical weighted aggregation preserves arbitrary product suprema. The
```

Lean 4 source (lines 401–442)

```
nonemptiness assumptions are necessary at the endpoints, where one projection
is discarded but the Cartesian product would otherwise be empty. -/
```

```
theorem weightedResultScott_sSup_product
  (p : Prob) (hp_0 : 0 <= p) (hp_1 : p <= 1)
  (S U : Set (TTContinuation.TTResult n))
  (hS : S.Nonempty) (hU : U.Nonempty) :
  weightedResultScott p hp_0 hp_1 (sSup S, sSup U) =
    sSup ((fun q => weightedResultScott p hp_0 hp_1 q) '' (S x ? U)) := by
  by_cases hpzero : p = 0
  * subst p
    simp only [weightedResultScott_zero]
    apply le_antisymm
    * apply sSup_le
      intro V hVU
      obtain <T, hTS> := hS
      apply le_sSup
      refine <(T, V), <hTS, hVU>, ?_>
      simp
    * apply sSup_le
      rintro _ <<T, V>, <hTS, hVU>, rfl>
      simpa using le_sSup hVU
  * by_cases hpone : p = 1
    * subst p
      simp only [weightedResultScott_one]
      apply le_antisymm
      * apply sSup_le
```

```

    intro T hTS
    obtain <V, hVU> := hU
    apply le_sSup
    refine <(T, V), <hTS, hVU>, ?_>
    simp
    * apply sSup_le
    rintro _ <<T, V>, <hTS, hVU>, rfl>
    simpa using le_sSup hTS
    * rw [weightedResultScott, if_neg hpzero, if_neg hpone]
    change core p hp_0 hp_1 (sSup S) (sSup U) =
      sSup ((fun q => core p hp_0 hp_1 q.1 q.2) '' (S x ? U))
    exact core_sSup_product p hp_0 hp_1 S U

end TTWeightedAggregation

end QLambda

```

A.70 Challenge.lean

356 lines.

Lean 4 source

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/
import Mathlib.Analysis.InnerProductSpace.Basic
import Mathlib.Analysis.Matrix.Order
import Mathlib.Data.Finset.Basic
import Mathlib.Data.List.Basic
import Mathlib.LinearAlgebra.Matrix.PosDef
import Mathlib.LinearAlgebra.Matrix.Trace
import Mathlib.Order.CompleteLattice.Basic
import Mathlib.Order.ConditionallyCompleteLattice.Basic
import Mathlib.OrderDirected
import Mathlib.Order.Hom.Basic
import Mathlib.Order.UpperLower.Basic
import Mathlib.Topology.Order.ScottTopology

/-!
# Palomar statement of record (?QVA quantum domain equation)

This module states the compared capstone and its type surface. It imports
only Mathlib. Challenge is allowed `sorry`. `IsQuantumPowerModel` is the
conditional specification of a quantum powerdomain. The capstone is
parameterized by a bundled `QuantumPowerModel`. The concrete
`TTContinuation.model` instance and its finite physical-instrument embedding
are proved in `QLambda/`, outside this deliberately abstract compared surface.
-/

open Matrix
open scoped MatrixOrder ComplexOrder

/-- Sub-normalized density operator on `M_n(?)`: positive semidefinite
with real trace at most one. -/
structure SubNormalizedDensity (n : Nat) where
  mat : Matrix (Fin n) (Fin n) ?
  posSemidef : mat.PosSemidef
  trace_le_one : (Matrix.trace mat).re <= 1

namespace SubNormalizedDensity

```

```

variable {n : Nat}

instance : PartialOrder (SubNormalizedDensity n) where
  le ? sigma := ?.mat <= sigma.mat
  le_refl ? := le_refl ?.mat
  le_trans ? sigma tau := le_trans
  le_antisymm ? sigma h?sigma hsigma? := by
    cases ?; cases sigma; congr
    exact le_antisymm h?sigma hsigma?

instance : OrderBot (SubNormalizedDensity n) where
  bot := <0, PosSemidef.zero, by simp [Matrix.trace_zero]>
  bot_le ? := by
    change (?.mat - 0).PosSemidef
    simpa using ?.posSemidef

end SubNormalizedDensity

namespace Scott1972.ContinuousLattice

open Set

universe u

section InducedTopology

variable {D D' D'' : Type*} [CompleteLattice D] [CompleteLattice D'] [CompleteLattice D'']

/-- **Scott 1972, S2, the induced topology.** -/
def ScottOpen (U : Set D) : Prop :=
  IsUpperSet U /\
    forall ?S : Set D?, S.Nonempty -> DirectedOn (* <= *) S -> sSup S in U -> (S ∩
    U).Nonempty

/-- **Scott 1972, S2.** The *way-below* relation. -/
def WayBelow (x y : D) : Prop :=
  exists U : Set D, ScottOpen U /\ y in U /\ U subseq Set.Ici x

@[inherit_doc] scoped infix:50 " << " => WayBelow

def IsContinuousLattice (D : Type*) [CompleteLattice D] : Prop :=
  forall y : D, IsLUB {x | x << y} y

/-- Scott's induced topology on a complete lattice, realized as mathlib's Scott topology. -/
@[reducible] noncomputable def scottTopologicalSpace : TopologicalSpace D :=
  Topology.scott D univ

/-- Continuous maps between complete lattices with Scott's induced topologies. -/
def ScottMap (D D' : Type*) [CompleteLattice D] [CompleteLattice D'] : Type _ :=
  { f : D -> D' // @Continuous D D' scottTopologicalSpace scottTopologicalSpace f }

namespace ScottMap

instance : CoeFun (ScottMap D D') (fun _ => D -> D') where
  coe f := f.1

@[ext]
theorem ext {f g : ScottMap D D'} (h : forall x, f x = g x) : f = g :=
  Subtype.ext (funext h)

instance instPartialOrder : PartialOrder (ScottMap D D') where
  le f g := forall x, (f : D -> D') x <= g x

```

```

le_refl _ _ := le_refl _
le_trans _ _ hfg hgh x := le_trans (hfg x) (hgh x)
le_antisymm _ _ hfg hgf := ScottMap.ext fun x => le_antisymm (hfg x) (hgf x)

noncomputable instance instSupSet : SupSet (ScottMap D D') := by
  sorry

noncomputable instance instCompleteLattice : CompleteLattice (ScottMap D D') := by
  sorry

/-- The identity Scott map. -/
noncomputable def idMap : ScottMap D D := by
  sorry

noncomputable def comp (f : ScottMap D' D'') (g : ScottMap D D') : ScottMap D D'' := by
  sorry

end ScottMap

/-- **Scott 1972, Definition 3.6.** A *retraction* of continuous lattices. -/
structure IsContinuousLatticeRetraction (D D' : Type*) [CompleteLattice D] [CompleteLattice D']
  where
    incl : ScottMap D D'
    retr : ScottMap D' D
    retr_incl : forall d, retr (incl d) = d

/-- **Scott 1972, Definition 3.6.** A *projection* of continuous lattices. -/
structure IsContinuousLatticeProjection (D D' : Type*) [CompleteLattice D] [CompleteLattice D']
  extends IsContinuousLatticeRetraction D D' where
    incl_retr_le : forall d, incl (retr d) <= d

end InducedTopology

section InverseLimit

variable (D : Nat -> Type u) [forall n, CompleteLattice (D n)]
variable (P : forall n, IsContinuousLatticeProjection (D n) (D (n + 1)))

/-- Compatibility of a sequence:  $j_n(x_{n+1}) = x_n$  for all  $n$ . -/
def Compatible (x : forall n, D n) : Prop :=
  forall n, (P n).retr (x (n + 1)) = x n

/-- **Scott 1972, S4.** The inverse limit  $D_\infty$  as the subspace of compatible sequences. -/
abbrev InverseLimit : Type u :=
  {x : forall n, D n // Compatible D P x}

noncomputable instance instCompleteLattice : CompleteLattice (InverseLimit D P) := by
  sorry

end InverseLimit

/-- A complete lattice bundled with its instance. -/
structure CLat : Type (u + 1) where
  carrier : Type u
  [str : CompleteLattice carrier]

attribute [instance] CLat.str

/-- The embedding  $i_{n \infty} : D_n \rightarrow D_\infty$ , Scott-continuous. -/
noncomputable def embInf (D : Nat -> Type u) [forall n, CompleteLattice (D n)]
  (P : forall n, IsContinuousLatticeProjection (D n) (D (n + 1))) (n : Nat) :
  ScottMap (D n) (InverseLimit D P) := by
  sorry

```

```

/-- The projection `j_{inf n} : D_inf -> D_n`, Scott-continuous. -/
noncomputable def projInf (D : Nat -> Type u) [forall n, CompleteLattice (D n)]
  (P : forall n, IsContinuousLatticeProjection (D n) (D (n + 1))) (n : Nat) :
  ScottMap (InverseLimit D P) (D n) := by
  sorry

/-- Finite product of Loewner spectrahedra, one block per matrix size. -/
def DensityVec : List Nat -> Type
| [] => PUnit
| n :: ns => SubNormalizedDensity n x DensityVec ns

namespace DensityVec

instance instPartialOrder : (ns : List Nat) -> PartialOrder (DensityVec ns)
| [] => inferInstanceAs (PartialOrder PUnit)
| _ :: ns =>
  haveI := instPartialOrder ns
  inferInstanceAs (PartialOrder (_ x _))

instance instOrderBot : (ns : List Nat) -> OrderBot (DensityVec ns)
| [] => { bot := <>, bot_le := fun _ => trivial }
| _ :: ns =>
  haveI := instOrderBot ns
  inferInstanceAs (OrderBot (_ x _))

end DensityVec

variable {D E : Type*} [CompleteLattice D] [CompleteLattice E]

/-- `a` factors through `DensityVec dims` via monotone encoding and reconstruction. -/
structure QFactorable (a : ScottMap D E) where
  dims : List Nat
  enc : D -> DensityVec dims
  recon : DensityVec dims -> E
  enc_mono : Monotone enc
  recon_mono : Monotone recon
  factor : forall x, (a : D -> E) x = recon (enc x)

/-- Jung / CKL finite separator. -/
def FinitelySeparated (f : ScottMap D D) : Prop :=
  exists M : Finset D, forall x, exists m in M, (f : D -> D) x <= m /\ m <= x

/-- A continuous lattice whose identity is a directed supremum of
Q-factorable, finitely separated approximants. -/
class IsOmegaQVA (D : Type*) [CompleteLattice D] where
  isContinuousLattice : IsContinuousLattice D
  approx : Nat -> ScottMap D D
  qfactorable : forall n, QFactorable (approx n)
  separated : forall n, FinitelySeparated (approx n)
  monotone_approx : Monotone approx
  iSup_approx : (bigcup n, approx n) = ScottMap.idMap

/-- Conditional specification of a quantum powerdomain model. -/
class IsQuantumPowerModel (Q : (D : Type u) -> [CompleteLattice D] -> Type u) where
  str : forall (D : Type u) [CompleteLattice D], CompleteLattice (Q D)
  map : forall {D E : Type u} [CompleteLattice D] [CompleteLattice E],
    ScottMap D E ->
    letI := str D
    letI := str E
    ScottMap (Q D) (Q E)
  map_id : forall {D : Type u} [CompleteLattice D],
    letI := str D

```

```

    map (ScottMap.idMap : ScottMap D D) = ScottMap.idMap
map_comp : forall {D E F : Type u} [CompleteLattice D] [CompleteLattice E] [CompleteLattice
F]
    (f : ScottMap E F) (g : ScottMap D E),
    letI := str D
    letI := str E
    letI := str F
    map (f.comp g) = (map f).comp (map g)
map_mono : forall {D E : Type u} [CompleteLattice D] [CompleteLattice E]
    {f g : ScottMap D E},
    letI := str D
    letI := str E
    f <= g -> map f <= map g
map_iSup : forall {D E : Type u} [CompleteLattice D] [CompleteLattice E]
    (F : Nat -> ScottMap D E) (_hF : Monotone F),
    letI := str D
    letI := str E
    map (bigcup n, F n) = bigcup n, map (F n)
closed : forall {D : Type u} [CompleteLattice D] (h : IsOmegaQVA D),
    letI := str D
    IsOmegaQVA (Q D)

attribute [instance] IsQuantumPowerModel.str

/-- A bundled quantum powerdomain: a `Q` that satisfies the spec. -/
structure QuantumPowerModel where
    Power : (D : Type u) -> [CompleteLattice D] -> Type u
    [spec : IsQuantumPowerModel Power]

attribute [instance] QuantumPowerModel.spec

/-- Carrier of the model at `D`. -/
abbrev QuantumPower (M : QuantumPowerModel) (D : Type u) [CompleteLattice D] : Type u :=
    M.Power D

/-- `[D -> Q(D)]` for the chosen model. -/
abbrev QuantumFunctor (M : QuantumPowerModel) (D : Type u) [CompleteLattice D] : Type u :=
    ScottMap D (M.Power D)

/-- `?QVA` is closed under the model's powerdomain. -/
abbrev omegaQVA_closed_under_quantumPower (M : QuantumPowerModel) {D : Type u}
    [CompleteLattice D] (h : IsOmegaQVA D) : IsOmegaQVA (M.Power D) :=
    IsQuantumPowerModel.closed (Q := M.Power) h

/-- `?QVA` is Cartesian closed (not a field of the spec). -/
noncomputable def omegaQVA_closed_under_functionSpace {D E : Type u}
    [CompleteLattice D] [CompleteLattice E]
    (hD : IsOmegaQVA D) (hE : IsOmegaQVA E) : IsOmegaQVA (ScottMap D E) := by
    sorry

/-- A pointed object of `?QVA`. -/
structure QDomain : Type (u + 1) where
    carrier : Type u
    [str : CompleteLattice carrier]
    omega : IsOmegaQVA carrier

attribute [instance] QDomain.str

/-- The quantum tower `D_{n+1} = [D_n -> Q(D_n)]` as bundled lattices. -/
noncomputable def qTowerCLat (M : QuantumPowerModel) (D_0 : CLat.{u}) : Nat -> CLat.{u}
| 0 => D_0
| n + 1 =>
    <ScottMap (qTowerCLat M D_0 n).carrier (QuantumPower M (qTowerCLat M D_0 n).carrier)>

```

```

/-- The carrier `D_n` of the quantum tower. -/
def qTowerType (M : QuantumPowerModel) (D_0 : CLat.{u}) (n : Nat) : Type u :=
  (qTowerCLat M D_0 n).carrier

noncomputable instance qTowerCompleteLattice (M : QuantumPowerModel) (D_0 : CLat.{u})
  (n : Nat) : CompleteLattice (qTowerType M D_0 n) :=
  (qTowerCLat M D_0 n).str

/-- The quantum tower as a sequence of `QDomain`s. -/
noncomputable def qTower (M : QuantumPowerModel) (D_0 : QDomain.{u}) : Nat → QDomain.{u}
| 0 => D_0
| n + 1 =>
  { carrier := ScottMap (qTower M D_0 n).carrier (QuantumPower M (qTower M D_0 n).carrier)
    omega :=
      omegaQVA_closed_under_functionSpace (qTower M D_0 n).omega
      (omegaQVA_closed_under_quantumPower M (qTower M D_0 n).omega) }

/-- Bonding projections `j_{n+1} = F(j_n)` for `F(X) = [X → Q(X)]`. -/
noncomputable def qTowerProj (M : QuantumPowerModel) (D_0 : CLat.{u})
  (j_0 : IsContinuousLatticeProjection D_0.carrier (QuantumFunctor M D_0.carrier)) :
  forall n, IsContinuousLatticeProjection (qTowerType M D_0 n) (qTowerType M D_0 (n + 1)) :=
  by
  sorry

/-- Inverse limit of the quantum tower. -/
abbrev QDInf (M : QuantumPowerModel) (D_0 : QDomain.{u})
  (j_0 : IsContinuousLatticeProjection D_0.carrier (QuantumFunctor M D_0.carrier)) :
  Type u :=
  InverseLimit (qTowerType M <D_0.carrier>) (qTowerProj M <D_0.carrier> j_0)

/-- Embedding `i_inf : D_inf → [D_inf → Q(D_inf)]`. -/
noncomputable def qEmbInfInf (M : QuantumPowerModel) (D_0 : QDomain.{u})
  (j_0 : IsContinuousLatticeProjection D_0.carrier (QuantumFunctor M D_0.carrier)) :
  ScottMap (QDInf M D_0 j_0) (QuantumFunctor M (QDInf M D_0 j_0)) := by
  sorry

/-- Projection `j_inf : [D_inf → Q(D_inf)] → D_inf`. -/
noncomputable def qProjInfInf (M : QuantumPowerModel) (D_0 : QDomain.{u})
  (j_0 : IsContinuousLatticeProjection D_0.carrier (QuantumFunctor M D_0.carrier)) :
  ScottMap (QuantumFunctor M (QDInf M D_0 j_0)) (QDInf M D_0 j_0) := by
  sorry

/-- Compared capstone, parameterized by a quantum powerdomain model. -/
theorem omegaQVA_quantum_domain_equation_solved
  (M : QuantumPowerModel) (D_0 : QDomain.{u})
  (j_0 : IsContinuousLatticeProjection D_0.carrier (QuantumFunctor M D_0.carrier)) :
  Nonempty (IsOmegaQVA (QDInf M D_0 j_0)) /\
  (qProjInfInf M D_0 j_0).comp (qEmbInfInf M D_0 j_0) = ScottMap.idMap /\
  (qEmbInfInf M D_0 j_0).comp (qProjInfInf M D_0 j_0) = ScottMap.idMap /\
  Nonempty (QDInf M D_0 j_0 ?o ScottMap (QDInf M D_0 j_0) (QuantumPower M (QDInf M D_0 j_0)))
  /\
  (ScottMap.idMap : ScottMap (QDInf M D_0 j_0) (QDInf M D_0 j_0)) =
  bigcup n, (embInf (qTowerType M <D_0.carrier>) (qTowerProj M <D_0.carrier> j_0) n).comp
  (projInf (qTowerType M <D_0.carrier>) (qTowerProj M <D_0.carrier> j_0) n) := by
  sorry

@[reducible] noncomputable def qDInf_isOmegaQVA (M : QuantumPowerModel) (D_0 : QDomain.{u})
  (j_0 : IsContinuousLatticeProjection D_0.carrier (QuantumFunctor M D_0.carrier)) :
  IsOmegaQVA (QDInf M D_0 j_0) := by
  sorry

/-- **Chen-Kou-Lyu Lemma 6.8.** A finitely separated Scott map satisfies `f x < x`. -/

```



```

theorem finitelySeparated_wayBelow (hD : IsContinuousLattice D) {f : ScottMap D D}
  (hf : FinitelySeparated f) (x : D) : (f : D -> D) x << x := by
  sorry

end Scott1972.ContinuousLattice

```

A.71 Solution.lean

22 lines.

Lean 4 source

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/
import QLambda.QuantumDomainEquation
import QLambda.Saturation
import QLambda.TTContinuationMonad

/-!
# Solutions to the Challenge

Importing the QLambda proof modules supplies the compared capstone
`omegaQVA_quantum_domain_equation_solved` (parameterized by a bundled
`QuantumPowerModel`), `qDInf_isOmegaQVA`, and
`finitelySeparated_wayBelow`, with the same names and types as in
`Challenge.lean`. `QLambda.TTContinuation.model` now supplies a concrete
Scott-continuation instance. `QLambda.TTPhysicalEmbedding` supplies the
finite physical embedding and its stated compatibility results; language
interpretation and operational adequacy remain separate from the compared
theorem.
-/

```