

Mechanized Denotation and Circuit Staging for an N -Bounded Linear Quantum λ -Fragment in Lean 4

Lars Warren Ericson

September 2026
CMU-CS-26-XXX

School of Computer Science
Carnegie Mellon University
Pittsburgh, PA 15213

Keywords: Lean 4; formal verification; quantum lambda calculus; linear types; CP-presheaf semantics; OpenQASM; quantum relations; quantum CPO

Abstract

We present a Lean 4 formalization of a typed linear/nonlinear quantum λ -calculus and a completed denotational and staging package for a first-order fragment of programs that use at most N live qubits. Separate unrestricted and linear contexts prevent implicit copy or discard of quantum data. The full language includes recursive types and `fix`; the fragment treated denotationally excludes them. Probability arises only from measurement. Kernel-checked foundations include quantum relations, a compact-closed $\text{Set} \dashv \text{qRel}$ model, quantum CPOs, and finite completely positive maps; these do not yet form one model of the full language. For the fragment we check a `Route~A` CP-presheaf denotation (`FragCert.denote`), the `UsesAtMostQubits` N -qubit resource bound, measured `new0` Born adequacy, staging of successfully elaborated closed terms to IBM Composer/OpenQASM, and Hom-to-ideal-CQ agreement on a declared quotation covering set, including two-wire circuit completeness. Full-language `bang/LNL`, recursive-type denotation, higher-order adequacy, and full abstraction remain objectives behind `AmbientCP` `Day-bang` glue. The mechanization gives new Lean proofs of quantum-relation complete-hom lattices, bilateral join-continuity of composition, dagger reversal, quantum function composition, and discrete qCPO completeness. To our knowledge this is the first machine-checked compact-closed $\text{Set} \rightleftarrows \text{qRel}$ adjunction in this representation, and the first certified typed lambda quotation theorem for the declared two-wire Composer fragment; priority wording is limited by the literature audit below. Sources: <https://github.com/catskillsresearch/qlambda>.

Contents

1	Introduction	3
1.1	Contributions	3
1.2	Scope	4
1.3	Lean development structure	4
2	The Typed Linear Language	5
2.1	Contexts and typing	5
2.2	Substitution and source safety	6
2.3	Theorem dependence	6
3	Finite Quantum Runtime	7
3.1	Theorem dependence	7
4	Quantum Sets, Relations, and qCPOs	7
4.1	Formalized relation algebra	8
4.2	Quantum posets and completeness	8
4.3	Theorem dependence	8
5	Type-Indexed Denotation and Recursive Types	8
5.1	Target compositional semantics	10
5.2	Theorem dependence (Route A fragment)	11
6	Deterministic Staging to Circuits	11
6.1	Theorem dependence	12
7	Circuit Reflection and Completeness	13
7.1	Theorem dependence	13
8	Composer and OpenQASM Interchange	13
8.1	Theorem dependence	14
9	Mechanized Claims and Release Boundary	15
9.1	Semantic objectives	15
9.2	Claim-surface dependence	16
10	Related Work and Novelty Qualification	16
11	References	17
12	Acknowledgments	18
A	Lean module index	18
A.1	QLambda project and Palomar	18
A.2	Vendored Scott1972 (subset of rows; full tree under vendor/scott1972/)	34

List of Figures

1	Layered Lean development: checked N -bounded fragment path (solid)	4
2	Section 2 theorem dependence: typing and substitution support	6
3	Section 3 theorem dependence: register dynamics support internal	7
4	Section 4 theorem dependence: quantum-relation algebra supports the	9
5	Section 5 checked-fragment theorem dependence culminating in the	12
6	Section 6 theorem dependence: successful elaboration yields	12
7	Section 7 theorem dependence: two-wire quotation capstone and the	14
8	Section 8 theorem dependence: canonical OpenQASM render/parse	14
9	Section 9 claim-surface dependence among the Palomar-facing and	16

1 Introduction

Quantum programming combines two incompatible structural regimes. Classical data may be weakened and contracted; unknown quantum data may not be copied, and its disposal must be represented by a physical operation. A semantics that puts both kinds of values in an ordinary Cartesian context obscures this distinction. We instead use a linear/nonlinear judgment

$$\Gamma; \Delta \vdash M : A,$$

where Γ contains unrestricted assumptions and Δ contains exactly-once assumptions. The semantic objective assigns a derivation a morphism

$$F[\Gamma] \otimes [\Delta] \longrightarrow [A]$$

in a CP-enriched, ω CPO-enriched LNL model. That full model remains the long-term target; the kernel-checked deliverable of this paper is the N -bounded first-order fragment package summarized above.

This is a typed, type-indexed account. It does not use a universal untyped reflexive object. In the intended model, each admissible recursive type has its own approximation chain, quantum evolution is represented by linear morphisms, and measurement is the source of probabilistic branching. The present Lean development establishes the source metatheory and supporting categorical components but does not yet assemble that intended model.

1.1 Contributions

The development has five connected parts.

1. It gives a Church-style linear/nonlinear quantum λ -calculus with de Bruijn syntax, verified formation predicates for recursive types, substitution, preservation, and a finite-register operational semantics.
2. It formalizes quantum-set and quantum-relation algebra, including complete hom orders, ω -continuous composition, compact closure, the concrete $\text{Set} \dashv \text{qRel}$ LNL model, and a separate category of quantum CPOs and Scott-continuous quantum functions.
3. It gives a Route~A CP-presheaf denotation for a first-order fragment (no μ/fix), including classical-bit Day comonoid contexts, closed β/Step packaging, measured new0 Born adequacy, and an N -qubit staging interface (`n_qubit_fragment_denotation_openqasm_interface`).
4. It constructs a deterministic, resource-certified staging procedure from closed elaborable fragment terms to circuit normal form and OpenQASM, with $\text{Hom} \Rightarrow \text{CQ}$ agreement on a declared quotation covering set.
5. It gives canonical typed lambda quotation for a two-wire circuit fragment and a structured Composer/OpenQASM interchange with ideal classical–quantum denotation and canonical parse/render theorems.

The first substantial formalization obligation not available as an off-the-shelf machine-checked library was the enriched algebra of quantum relations. Weaver, Kornell, Jenča–Lindhovius, and Kornell–Lindhovius–Mislove prove stronger paper-level categorical results, but provide no Lean implementation of the chosen matrix/subspace representation. We prove the complete hom lattice, bilateral join-continuity

of composition, closure of functions under composition, and the discrete-qCPO instance directly. The higher-order development further proves explicit tensor, evaluation/currying, unitors, associator, braiding, and the ordinary strong monoidal adjunction. In particular it does not use the false route from pointwise-ordered continuous maps to graph relations: graph is used from a discretely ordered ordinary set category.

1.2 Scope

The headline claim is the N -bounded fragment package above, not a finished domain semantics of the full language. “Circuit completeness” means that every circuit in the declared finite target fragment (presently the supported two-wire Composer quotation surface) has a canonical well-typed lambda representative. It does not mean that every unitary has an exact finite decomposition, nor that every fragment term elaborates. OpenQASM is an interchange format here, not the denotational semantics, and no result concerns calibration, noise, transpiler heuristics, or arbitrary Python/Qiskit programs. The AmbientCP / Track~L path is the intended extension to bang, recursive types, and full-language adequacy; it is open, not abandoned.

1.3 Lean development structure

The mechanization is layered. Source metatheory and the finite runtime sit above a quantum-relation / qCPO substrate and a CP-presheaf fragment model; staging and quotation connect the fragment to Composer/OpenQASM. Track~L bang glue is deferred and does not block the N -bounded package.

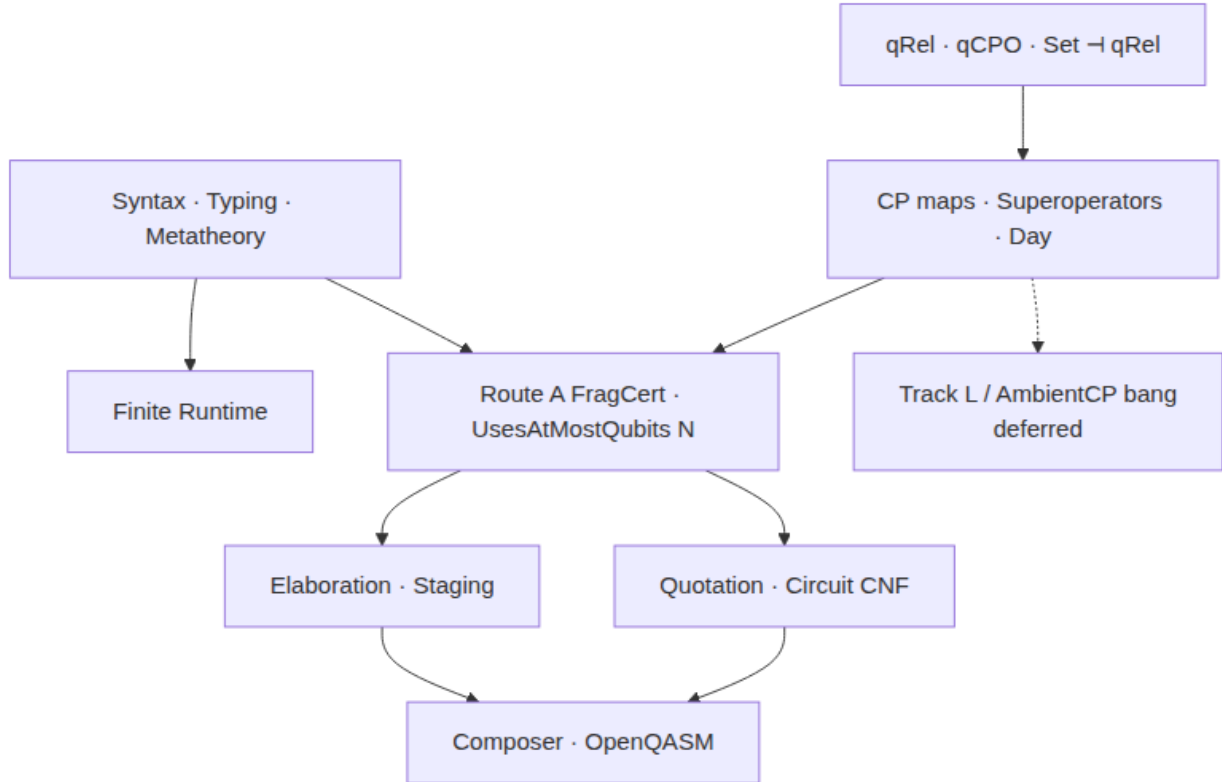


Figure 1: Layered Lean development: checked N -bounded fragment path (solid)

versus deferred Track~L bang glue (dashed).

2 The Typed Linear Language

The binder mode, types, physical constants, terms, and values are:

$$\kappa ::= \text{lin} \mid \text{unres},$$

$$A, B ::= \alpha \mid 1 \mid \text{Bit} \mid \text{Qubit} \mid A \otimes B \mid A \multimap B \mid A \rightarrow B \mid \mu\alpha.A.$$

Here $A \multimap B$ abbreviates $\text{arrow}(\text{lin}, A, B)$ and $A \rightarrow B$ abbreviates $\text{arrow}(\text{unres}, A, B)$. Recursive type variables use de Bruijn indices; μA binds type index zero in A .

$$p ::= \text{new0} \mid X \mid H \mid T \mid \text{RY}(r) \mid \text{CX} \mid \text{reset}, \quad r \in \mathbb{Q},$$

$$\begin{aligned} M, N, K ::= & x_n^\kappa \mid \lambda^\kappa(A).M \mid M N \mid \langle \rangle \mid \text{bit}(b) \\ & \mid \langle M, N \rangle \mid \text{unpair } M K \mid \text{if } M \text{ then } N \text{ else } K \\ & \mid p \mid \text{measure } M K \mid \text{fix}_A M \mid \text{fold}_A M \mid \text{unfold } M, \quad b \in \{\text{false}, \text{true}\}. \end{aligned}$$

Term variables use separate de Bruijn indices in the unrestricted and linear contexts, selected by κ . Lambda is the only term binder. The eliminator $\text{unpair } M K$ applies the curried linear continuation $K : A \multimap B \multimap C$ to the two components of $M : A \otimes B$. Similarly, $\text{measure } M K$ consumes $M : \text{Qubit}$ and invokes $K : \text{Bit} \rightarrow \text{Qubit} \multimap A$: the measured bit is unrestricted, while the post-measurement qubit remains linear.

The constants have the following complete source types:

$$\begin{array}{ll} \text{new0} & : 1 \multimap \text{Qubit} \\ \text{CX} & : \text{Qubit} \multimap \text{Qubit} \multimap (\text{Qubit} \otimes \text{Qubit}) \end{array} \quad \begin{array}{ll} X, H, T, \text{RY}(r) & : \text{Qubit} \multimap \text{Qubit} \\ \text{reset} & : \text{Qubit} \multimap \text{Qubit}. \end{array}$$

The call-by-value values are

$$V, W ::= \langle \rangle \mid \text{bit}(b) \mid \lambda^\kappa(A).M \mid \langle V, W \rangle \mid p \mid \text{fold}_A V.$$

Qubits are not closed source values; runtime wire handles inhabit the machine boundary. Probability is likewise absent from the term grammar and appears only on measurement transitions. There is no `emit`, source sequencing primitive, probabilistic choice, internal choice, or external choice.

2.1 Contexts and typing

Typing judgments have the form

$$\Gamma; \Delta \vdash M : A, \quad \Gamma ::= \cdot \mid \Gamma, A, \quad \Delta ::= \cdot \mid \Delta, _ \mid \Delta, A.$$

The unrestricted context Γ is a list of types. The linear context Δ is a position-preserving list of optional types: an empty cell `_` records a consumed or absent de Bruijn position.

Unrestricted variables may be weakened and contracted. A linear context is a list of optional type cells; context splitting partitions occupied cells while preserving de Bruijn positions. Linear application and tensor introduction split the linear context. An unrestricted closure may not capture live linear resources.

Lean declarations are concentrated in:

- `QLambda/Linear/Syntax.lean`;
- `QLambda/Linear/Context.lean`;
- `QLambda/Linear/Typing.lean`;
- `QLambda/Linear/TypeFormation.lean`.

The executable type checker is connected to the proof-level typing relation. Negative examples include cloning a qubit and capturing a live qubit in an unrestricted function.

2.2 Substitution and source safety

The formal substitution proof distinguishes used and unused linear variables. It includes split rotation, all-none transport, linear substitution, and unrestricted substitution with empty linear support. These results imply preservation for deterministic source reduction and for measurement-labelled transitions.

For closed nonrecursive terms, progress yields either a value, a classical step, or a genuine quantum blocking point. It is not the vacuous statement that a primitive is “stuck.”

2.3 Theorem dependence

The Palomar-facing type-safety package sits on preservation, progress, and determinism; those in turn rest on substitution and the typing judgment.

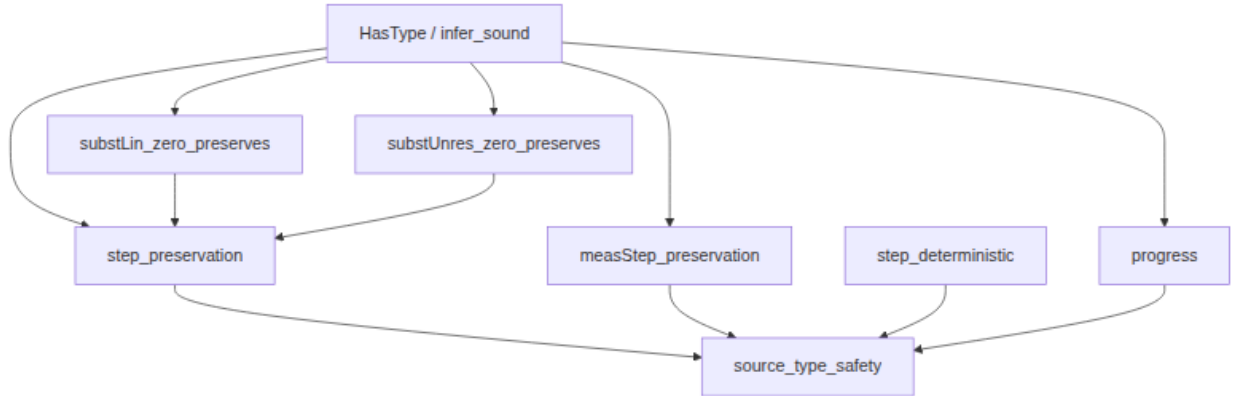


Figure 2: Section 2 theorem dependence: typing and substitution support

preservation/progress; `source_type_safety` packages the closed-program capstone.

3 Finite Quantum Runtime

A runtime configuration contains a finite register state, allocated-wire information, an environment, and a typed control stack. Gates act by their canonical matrices. Reset discards and reinitializes one wire. Measurement has two labelled branches whose weights are obtained from the Born rule.

The runtime proves:

- internal-transition preservation;
- measurement-transition preservation;
- nonnegativity and upper bounds of branch probabilities;
- normalization of the two measurement outcomes;
- progress modulo finite-wire exhaustion.

The runtime does not add source-level probability. Probabilities label physical measurement transitions only.

3.1 Theorem dependence

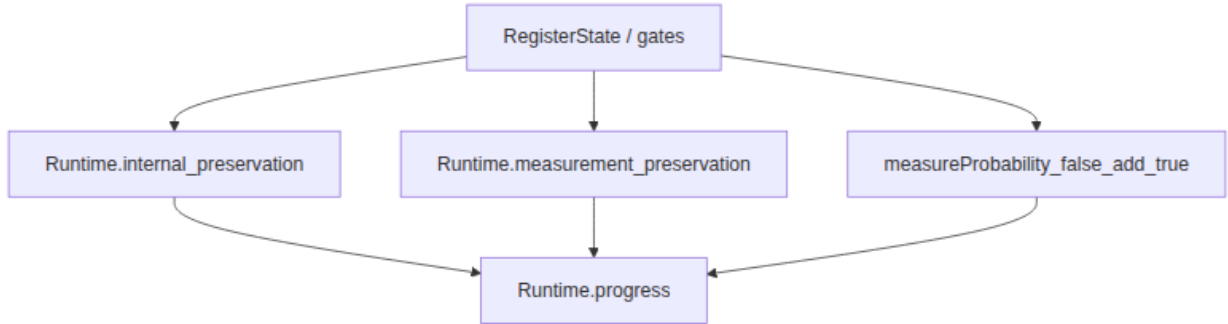


Figure 3: Section 3 theorem dependence: register dynamics support internal

and measurement preservation, Born normalization, and runtime progress.

4 Quantum Sets, Relations, and qCPOs

A quantum set X is a family of finite-dimensional Hilbert spaces $(X_x)_{x \in \text{At}(X)}$. A quantum relation $R : X \rightarrow Y$ assigns to each pair (x, y) a complex linear subspace

$$R(x, y) \subseteq \mathcal{L}(X_x, Y_y).$$

Relations are ordered pointwise by inclusion. Composition takes the span of operator products over intermediate atoms, and dagger takes adjoints while reversing atom pairs.

4.1 Formalized relation algebra

`QLambda/Domain/QuantumRel.lean` proves:

$$(T \circ S) \circ R = T \circ (S \circ R), \quad R \circ 1 = R = 1 \circ R,$$

$$(S \circ R)^\dagger = R^\dagger \circ S^\dagger,$$

and

$$\left(\bigvee_n S_n \right) \circ R = \bigvee_n (S_n \circ R), \quad S \circ \left(\bigvee_n R_n \right) = \bigvee_n (S \circ R_n).$$

Each hom is a complete lattice. Consequently quantum sets and quantum relations form an ω CPO-enriched category `qRelCategory`.

A relation is a quantum function when it satisfies the usual dagger inequalities. Comparable quantum functions are equal, and quantum functions are closed under composition. Unitary matrices yield quantum functions, and the formalized H , X , T , RY , and CX matrices agree with their completed-CP presentations.

4.2 Quantum posets and completeness

A quantum poset is a quantum set with a reflexive, transitive, antisymmetric quantum relation. The qCPO condition is stated using increasing sequences of functions from atomic probes. Discrete quantum posets are qCPOs because comparability forces equality, so every such chain is constant. This gives the qubit, classical bit, and tensor-unit objects used by the finite fragment.

`QuantumMonoidal.lean` supplies tensor on homs, internal hom, evaluation, currying, unitors, associator, and braiding, and proves the required ω -supremum laws. `QuantumLNL.lean` packages the resulting concrete model. Its nonlinear category consists of sets and functions with discrete hom orders; classical inclusion is the graph functor and its right adjoint is the set of relations from the tensor unit. This deliberately avoids the non-monotone graph map from pointwise-ordered continuous-function homs.

Separately, `QuantumCPOCategory.lean` packages quantum CPOs and Scott-continuous quantum functions as an ω CPO-enriched category. The formalization does not identify that category with the linear category of the concrete `Set-qRel` adjunction. The published recursive LNL route instead uses the quantum lift monad and its Kleisli category; that construction is not yet present here.

4.3 Theorem dependence

concrete LNL packaging and the separate Scott-function qCPO category.

5 Type-Indexed Denotation and Recursive Types

This section separates the kernel-checked Route~A fragment denotation from the intended full-language model. The fragment package (first-order data, linear FO-domain arrows, unrestricted bit binders, primitives, measurement; no μ /fix) supplies compositional `FragCert.denote`, classical-bit Day contexts,

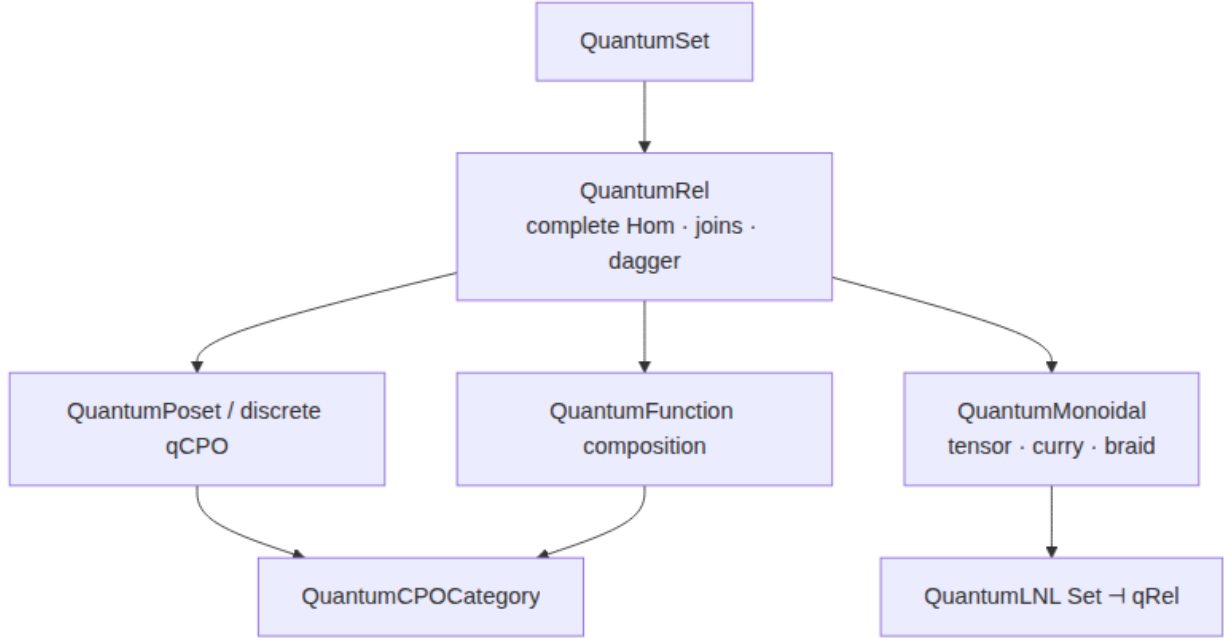


Figure 4: Section 4 theorem dependence: quantum-relation algebra supports the

closed β /Step laws, measured new0 Born adequacy, and the N -qubit OpenQASM staging interface; see §9. The intended full-language interpretation still assigns

$$\llbracket \Gamma; \Delta \rrbracket = F[\llbracket \Gamma \rrbracket] \otimes \llbracket \Delta \rrbracket.$$

Tensor and arrows are to be interpreted by the monoidal and closed structure. Primitives are to embed the checked presentation-independent finite CP classes, and measurement is to be interpreted as a finite instrument into a classical sum while retaining the post-measurement qubit.

For a strictly positive recursive body $A(\alpha)$, the intended object $\llbracket \mu\alpha.A \rrbracket$ is the bilimit of its finite unfolding chain. `QLambda/Domain/RecursiveTypes.lean` constructs the carrier of compatible approximants and its complete-lattice structure. Dropping and restoring the zeroth approximation define inverse ω -continuous maps, packaged as `ProjectionChain.shiftIso`. It does not yet construct the source-type functor or connect strict positivity to a concrete unfolding chain.

`QLambda/Linear/Denotation.lean` records the operations needed by every typing rule, its desired constructor equations, and presentation-independent finite CP meanings for physical primitives. No concrete full-language `DenotationModel` instance exists. Classical beta, fix unfolding, and fold/unfold are exact only in the operational quotient generated by source reduction; these are not yet full-language denotational soundness or adequacy theorems.

The finite CP substrate for that target is now checked: intrinsic Choi maps are equivalent to the existing completed Kraus classes, TNI superoperators contain allocation, reset, gates, and measurement branches, and specialized modules have Yoneda, representable Day tensor, representable internal hom, and finite symmetric powers. First-order source types (unit, bits, qubits, and their tensors) have representable objects, and every source primitive agrees with its intrinsic superoperator. The symmetric series has weakening, dereliction, contraction, and promotion along finite basis equivalences.

A stronger fragment is now kernel checked for low dimensions. For every system of dimension $A \leq 1$,

the formal series exponential carries a genuine Day comonoid structure and satisfies the cofree universal property

$$\text{ComonoidHom}(C, !A) \cong \text{Hom}(C, y(A)),$$

inducing co-Kleisli promotion $\text{Hom}(!B, A) \rightarrow \text{Hom}(!B, !A)$. At the same time, two TNI obstructions are checked. Complementary computational-basis effects on a qubit sum to discard, but composition with matching isometric preparations yields two copies of id_1 , which admit no TNI Choi sum; hence generic joint precomposition at fiber dimension $d \geq 2$ fails for representable modules. Separately, every canonical homogeneous bang split of total degree k has the same effect as the unsplit coefficient, so the joint effect is $(k + 1)$ copies of that effect: the proposed raw Route~A joint-effect bound already fails at $A = 2$, degree 1. These refutations do not by themselves prove failure of every Day-bilinear admissibility predicate: transferring the effect witness into `BangComultComponentsAdmissible` requires an explicit bilinear that recovers both ordered degree-one splits in one TNI fiber (`BangComultDayTransferWitness`). We prove that any such witness implies $\neg \text{BangComultComponentsAdmissible } 2$ by extracting the selected two-term row through flattening and reindexing, but no TNI/representable construction of the witness is given (fixed projection pairs recover only one ordering; product modules separate summands; unscaled addition of both orderings leaves the TNI carrier). Gate~L8 therefore publishes the named replacement category `AmbientCPDayBangCategory` of unrestricted-CP fibers (`cpmModule`), which restores binary fiber sums and joint action at every dimension and cannot host the nonsummable Bool pair; the Gate~8 suite is `ambientCP_gate8_testSuite`, with terminal theorem `day_bang_l8_resolved_by_ambientCP_replacement`. `BangSplitEffectAdmissible` is the global universal Route~A bound, not a hereditary carrier-membership predicate; it fails at $A = 2$ by excluding the degree-one identity series. Scaling by $\frac{1}{2}$ repairs the $(A, k) = (2, 1)$ joint-effect matrix bound to I , but left/right counit force the $(0, 1)$ and $(1, 0)$ boundary weights to remain 1, so uniform half-scaling is not a counital repair. The coefficientwise tensor-square object is still not the genuine Day tensor of two series modules. General Day closure for based modules, an all-dimensional TNI cofree exponential, a bang rebuilt in the ambient-CP replacement, the based double-dual classical subcategory, and the LNL package remain objectives. Consequently unrestricted arrows are not yet interpreted for $A \geq 2$. The intended adequacy boundary is closed terms with first-order observable result: denotation should equal the supremum of finite-step subnormalized operational instruments. Adequacy at arbitrary higher-order result types and full abstraction are not claimed.

5.1 Target compositional semantics

For clarity, we state the complete Scott–Strachey-style definition that the remaining formalization must realize. This subsection is a specification, not a list of completed theorems. In the intended linear category $\mathcal{L}$, with tensor unit I , additives, internal hom $\multimap$, and exponential $!$, type objects are

$$\begin{aligned} \llbracket 1 \rrbracket &= I, & \llbracket \text{Bit} \rrbracket &= I \oplus I, & \llbracket \text{Qubit} \rrbracket &= y(2), \\ \llbracket A \otimes B \rrbracket &= \llbracket A \rrbracket \otimes \llbracket B \rrbracket, & \llbracket A \multimap B \rrbracket &= \llbracket A \rrbracket \multimap \llbracket B \rrbracket, & \llbracket A \rightarrow B \rrbracket &= !\llbracket A \rrbracket \multimap \llbracket B \rrbracket. \end{aligned}$$

For a strictly positive body $A(\alpha)$, $\llbracket \mu\alpha.A \rrbracket$ is the embedding–projection colimit of

$$0 \longrightarrow \llbracket A \rrbracket(0) \longrightarrow \llbracket A \rrbracket^2(0) \longrightarrow \cdots,$$

with inverse continuous maps $\text{fold}_A : \llbracket A[\mu\alpha.A/\alpha] \rrbracket \rightrightarrows \llbracket \mu\alpha.A \rrbracket : \text{unfold}_A$. The context object is

$$C_{\Gamma;\Delta} = F\left(\prod_{A \in \Gamma} G[A]\right) \otimes \bigotimes_{A \in \Delta} [A],$$

where an empty linear cell contributes I . A typing derivation denotes $\llbracket \Gamma; \Delta \vdash M : A \rrbracket : C_{\Gamma;\Delta} \rightarrow [A]$.

Let split_s be the structural map induced by a verified linear context split s , let lookup^ω and lookup^1 be unrestricted and linear projections, and let discard be the structural map available exactly for an all-empty linear context. Writing ev_κ , curry_κ , tensorElim , and $\text{bitElim}(f, g)$ for the corresponding model-derived maps, the term clauses are required to be:

$$\begin{aligned} \llbracket x_n^\omega \rrbracket &= \text{lookup}_n^\omega, \\ \llbracket x_n^1 \rrbracket &= \text{lookup}_n^1, \\ \llbracket \lambda^\kappa(A).M \rrbracket &= \text{curry}_\kappa(\llbracket M \rrbracket), \\ \llbracket M N \rrbracket &= \text{ev}_\kappa \circ (\llbracket M \rrbracket \otimes \llbracket N \rrbracket) \circ \text{split}_s, \\ \llbracket \langle \rangle \rrbracket &= \text{unit} \circ \text{discard}, \\ \llbracket \text{bit}(b) \rrbracket &= \text{bit}_b \circ \text{discard}, \\ \llbracket \langle M, N \rangle \rrbracket &= (\llbracket M \rrbracket \otimes \llbracket N \rrbracket) \circ \text{split}_s, \\ \llbracket \text{unpair } M \ K \rrbracket &= \text{tensorElim} \circ (\llbracket M \rrbracket \otimes \llbracket K \rrbracket) \circ \text{split}_s, \\ \llbracket \text{if } B \ M \ N \rrbracket &= \text{bitElim}(\llbracket M \rrbracket, \llbracket N \rrbracket) \circ (\llbracket B \rrbracket \otimes \text{id}) \circ \text{split}_s, \\ \llbracket p \rrbracket &= \text{prim}_p \circ \text{discard}, \\ \llbracket \text{measure } M \ K \rrbracket &= \text{handleMeasure} \circ (\llbracket M \rrbracket \otimes \llbracket K \rrbracket) \circ \text{split}_s, \\ \llbracket \text{fix}_A \ M \rrbracket &= \bigsqcup_{n < \omega} \Phi_{\llbracket M \rrbracket}^n(\perp), \\ \llbracket \text{fold}_A \ M \rrbracket &= \text{fold}_A \circ \llbracket M \rrbracket, \\ \llbracket \text{unfold } M \rrbracket &= \text{unfold}_A \circ \llbracket M \rrbracket. \end{aligned}$$

Here prim_p must be the checked CP map for the complete primitive signature, and handleMeasure must use the two subnormalized maps $\rho \mapsto P_b \rho P_b$ while promoting the known outcome bit and retaining the measured qubit. The implementation is complete only when these clauses are derived from the concrete model, independent of typing derivations, and validated by substitution, soundness, and adequacy.

5.2 Theorem dependence (Route A fragment)

N -qubit staging interface package.

6 Deterministic Staging to Circuits

The circuit-normal fragment has statically bounded qubit and classical registers. A prefix allocator produces `Fin q` wire indices and proves freshness, distinctness, and bounds. Fresh-qubit allocation lowers to reset on a fresh physical wire.

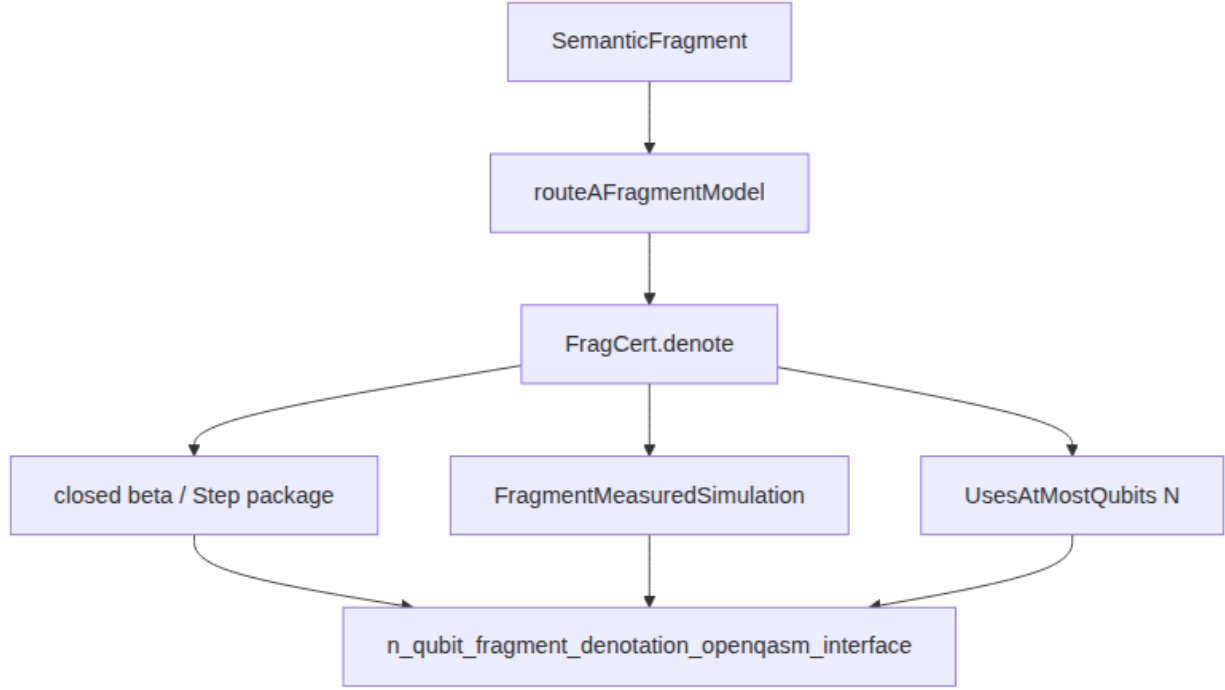


Figure 5: Section 5 checked-fragment theorem dependence culminating in the

Staging is a fuelled call-by-value evaluator. Lambdas, including higher-order gate combinators, execute at staging time. A successful result contains first-order data only. Recursive types and general recursion remain in the language semantics but are excluded from this finite compilation fragment.

Lean proves successful staging is deterministic and preserves source type, resource typing, circuit well-formedness, and allocation bounds. Regression examples include Bell preparation, measurement-controlled gates, reset/reuse, and higher-order gate composition.

6.1 Theorem dependence

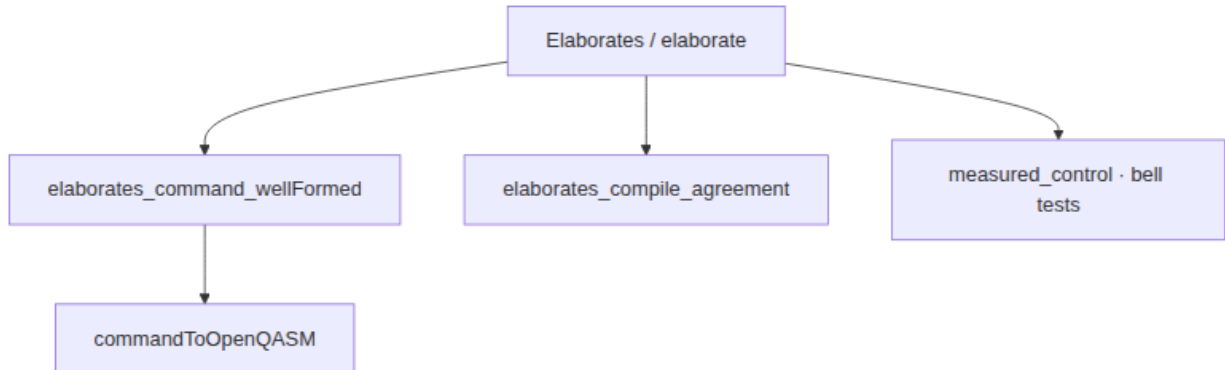


Figure 6: Section 6 theorem dependence: successful elaboration yields

well-formed Composer commands, CQ compile agreement, and OpenQASM export.

7 Circuit Reflection and Completeness

`QLambda/Linear/Circuit.lean` translates between the circuit normal form and the supported Composer block fragment. Compilation preserves ideal CQ denotation. Reflection is total on a proof-carrying supported block, and compilation after reflection returns the original block.

A canonical lambda quotation uses unrestricted binders for classical slots and linear binders for wires. `QuotationGeneral.lean` covers two qubits and one classical bit, including distinct-wire CX , measurement, reset/reuse, store, sequencing, and conditionals. It excludes the unsupported coin command by an explicit `Quotable` predicate.

The checked circuit-level declarations have the following meanings:

- `denote_compile`: the quotation meaning, defined from the represented command, equals that command's CQ denotation;
- `denote_reflect`: command reflection preserves the same inherited CQ denotation;
- `compile_reflect`: compiling a canonical representative returns the canonical circuit;
- `quotation_capstone`: every `Quotable` command has a well-typed canonical lambda representative whose compilation is the original command and whose inherited CQ denotation is equal to the circuit denotation.

These results give circuit-level completeness for the declared two-wire `Quotable` surface. At the fragment level, closed quotations in the covering set identify `FragCert.denote` with ideal `CQ.Sem` via `interpretQuoteSpine / interpretQuoteSpineExt`, and successful elaboration reuses `elaborates_compile_agreement` together with quote-normal-form transport. A general extract of `CQ.Sem` from an arbitrary quotation `Hom`, and dedicated spines for every remaining `Quotable` constructor, remain open; so does a full-language source-level `denote_compile` theorem beyond the fragment packaging.

7.1 Theorem dependence

extended $\text{Hom} \Rightarrow \text{CQ}$ covering-set spines.

8 Composer and OpenQASM Interchange

The target is a frozen, versioned AST with finite registers. The supported structured subset includes gates, measurement, reset, classical assignment, conditionals, switches, bounded loops, boxes, and structured loop control where the ideal semantics is defined.

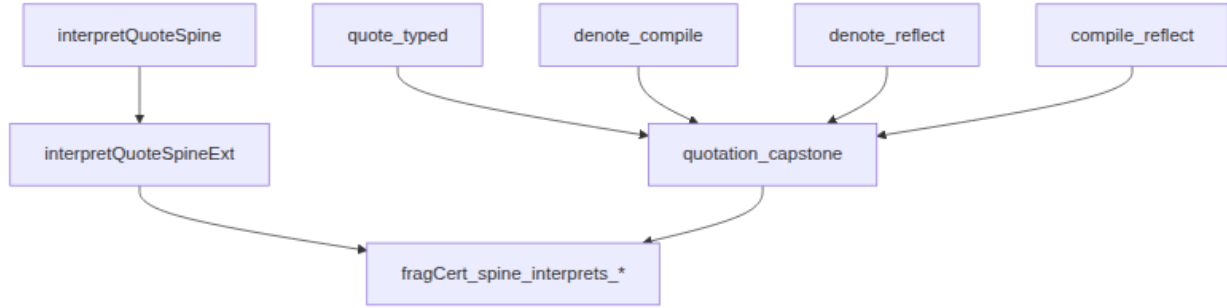


Figure 7: Section 7 theorem dependence: two-wire quotation capstone and the

Rendering produces canonical OpenQASM text. Parsing accepts exactly the declared canonical presentation and proves render/parse round trips under the `ParserCanonical` boundary. This is deliberately not a parser for arbitrary OpenQASM 3 text.

Circuit denotation is an ideal classical–quantum instrument. Sequencing is instrument bind; measurement updates a classical slot; structured control is interpreted compositionally. Barriers and delays remain syntax but are identities in the ideal semantics.

8.1 Theorem dependence

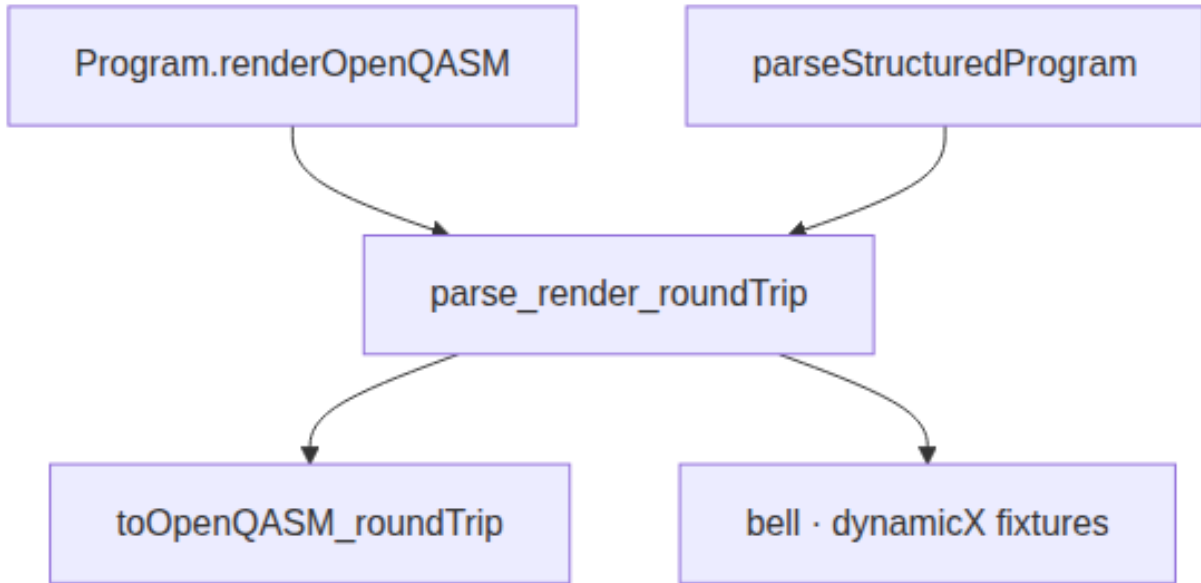


Figure 8: Section 8 theorem dependence: canonical OpenQASM render/parse

round trips on the declared structured subset.

9 Mechanized Claims and Release Boundary

The following components are kernel checked without semantic axioms:

- source scope, typing, substitution, preservation, and progress;
- finite-register gate/reset/measurement runtime and normalization;
- pointed ω CPO maps, products, evaluation, currying, and least fixed points;
- complete quantum-relation hom lattices and enriched composition;
- tensor/internal-hom closure and the concrete `Set-qRel` LNL model;
- the category of qCPOs and Scott-continuous quantum functions;
- inverse continuous shift maps for projection-chain bilimits;
- discrete qCPO instances and finite CP/gate presentations;
- `Route~A` fragment denotation (`FragCert.denote`), classical-bit `Day` comonoid contexts, closed fragment β /Step packaging, and measured `new0` Born adequacy;
- N -qubit staging interface (`UsesAtMostQubits`, `successfulElaborates` $\Rightarrow$ well-formed `Composer`, `commandToOpenQASM`) and covering-set `Hom` $\Rightarrow$ `CQ` quotation bridges;
- deterministic staging with resource certificates;
- circuit/Composer correspondence on the supported block fragment;
- typed lambda quotation and circuit completeness for the declared two-wire fragment;
- structured canonical `OpenQASM` round trips.

The theorem boundary does not include an equivalence between the checked LNL and qCPO categories, a fully instantiated denotation of every admissible recursive source type, full abstraction, or unrestricted adequacy. It also does not include noisy-device behavior or exact finite synthesis of every unitary. Missing semantic structure is not introduced as an axiom or hidden as a theorem parameter.

9.1 Semantic objectives

Checked progress now includes the `Day` bang comonoid and cofree universal property for $A \leq 1$, the fiber-2 TNI obstruction, the raw `Route~A` split-family refutation, and the failure of the global raw split-effect bound at $A = 2$. Half-scaling repairs the $(2, 1)$ joint-effect matrix bound but is not a counital repair (boundary weights remain 1); the implication from `BangComultDayTransferWitness` to failure of dimension-two `Day` admissibility is checked; no TNI witness is constructed, and `L8` instead records `AmbientCP DayBangCategory / day_bang_l8_resolved_by_ambientCP_replacement`. The finite CP maps, TNI superoperators, representable `Yoneda/Day` fragment, first-order type objects, $A \leq 1$ bang/-cofreeness, `Route~A/global-bound` refutations, ambient-CP `Gate~8` replacement, and primitive agreement are checked; they are not an all-dimensional LNL instance or full-language denotation. The minimum fragment (first-order data, linear FO-domain arrows, unrestricted bit binders, primitives, measurement) has a

checked `Route~A PresheafFragmentModel`, compositional `FragCert . denote` via controlled `ite Elim`, classical-bit Day comonoid contexts with Day/FO closed β/η , closed FO `ite`, closed linear and unrestricted identity β , closed unpair β , constant unrestricted subst β , Step congruence / `fragment_step_ denote_sound_complete`, measured new0 Born adequacy (`FragmentMeasuredSimulation`), and the N-qubit packaging theorem `n_qubit_fragment_denotation_openqasm_interface` (`UsesAtMostQubits`, successful `Elaborates  $\Rightarrow$  well-formed Composer`, `commandToOpenQASM`). Hom-side quote spines and `interpretQuoteSpine / interpretQuoteSpineExt` identify `Frag Cert . denote` with ideal CQ . Sem for skip/x/h and a covering set of Quotable forms (t/reset/measure/seq-skip; branch via `interpretQuoteHom` packaging). Remaining Quotable constructors without dedicated Hom spines and undecidable arbitrary `Hom  $\rightarrow$  CQ` extract stay open; `Track~L / bang` are independent. The concrete physical-bit copy/discard is not counital; `classicalBitModule` is the unrestricted carrier with checked comonoid laws. Track L packages are deferred on L9: relative `AmbientCP` admissibility for $A \leq 1$, a degree-row gate at 2, and `AmbientCPComonoid` packaging for $A \leq 1$ are checked; A=1-style glue is blocked by $\$ \backslash \text{neg} \$$ `BangDegreeUnitRectangleHasSum 2`, so glued `BangComultAmbientCP Admissible 2` remains open (absolute $A=2$ not claimed).

9.2 Claim-surface dependence

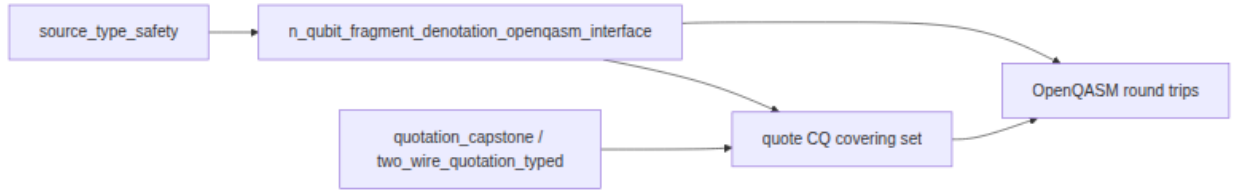


Figure 9: Section 9 claim-surface dependence among the Palomar-facing and

N -bounded packaging theorems.

10 Related Work and Novelty Qualification

Weaver introduced quantum relations as operator subspaces. Kornell, Lindenhovius, and Mislove developed quantum posets and quantum CPOs and used them for recursive quantum programming. Selinger and Valiron established linear/nonlinear semantic methods for higher-order quantum computation. Pagani, Selinger, and Valiron gave quantitative semantics, and Tsukada and Asada developed enriched presheaf models with strong recursion and full-abstraction results.

Those works are the semantic foundation and prove stronger paper-level results than claimed here: complete relation homs, arbitrary-join-preserving composition, dagger compactness, quantum-function order, qCPO enrichment, and the lifted recursive LNL model all have explicit literature support. Our novelty claim is therefore limited to Lean formalization of the selected representation and its integration with the typed source and finite circuit pipeline. We list exact declarations. Absence of another proof-assistant implementation from the sources checked is not itself a mathematical priority proof.

11 References

References

- [1] A. Kornell, B. Lindenhovius, and M. Mislove, *Quantum CPOs*, 2021, arXiv:2109.02196.
 - [2] N. Weaver, *Quantum relations*, Memoirs of the American Mathematical Society 215(1010), 2012.
 - [3] A. Jenča and B. Lindenhovius, *Monoidal Quantaloids*, 2025.
 - [4] A. Kornell et al., *A Category of Quantum Posets*, 2023.
 - [5] A. Kornell et al., *Categories of Quantum CPOs*, arXiv:2406.01816.
 - [6] P. Selinger and B. Valiron, *A lambda calculus for quantum computation with classical control*, Mathematical Structures in Computer Science 16(3), 2006.
 - [7] M. Pagani, P. Selinger, and B. Valiron, *Applying quantitative semantics to higher-order quantum computing*, POPL, 2014.
 - [8] T. Tsukada and K. Asada, *Enriched presheaf model of quantum FPC*, 2024.
 - [9] Committee on Publication Ethics (COPE). *Authorship and AI tools: COPE position statement*. 2024. <https://publicationethics.org/guidance/cope-position/authorship-and-ai-tools>
 - [10] AnySphere, Inc. *Cursor: AI-native code editor and agent environment*. <https://cursor.com> (accessed 2026).
 - [11] xAI. *Grok 4.7*. Model documentation as integrated in Cursor, <https://cursor.com/docs/models> (accessed 2026).
 - [12] Anthropic. *Claude Opus 5.5*. Model documentation as integrated in Cursor, <https://cursor.com/docs/models> (accessed 2026).
 - [13] OpenAI. *GPT 5.6*. Model documentation as integrated in Cursor, <https://cursor.com/docs/models> (accessed 2026).
 - [14] AnySphere, Inc. *Composer 2.5*. Model documentation as integrated in Cursor, <https://cursor.com/docs/models> (accessed 2026).
-

12 Acknowledgments

The human author retains sole responsibility for the mathematical content, the choice of formalization route, and every formal claim in this work. Following standard publisher practice (for example, COPE guidance on authorship and AI tools), no large language model is listed as a co-author.

Lean and this narrative were produced with AI-agent assistance under the author’s direction and review. The trusted proof object is the Lean kernel output, not generated prose or tests. Assistance from the following tools is recorded in `scripts/ai_model_cards.py` and expanded when building `arxiv.tex`:

- **Cursor [Cur26]** — agent-assisted editing in the Cursor IDE for the typed linear calculus, quantum-relation and qCPO developments, the CP-presheaf substrate, circuit quotation, and drafting this narrative. Generated Lean was provisional until it compiled under the pinned toolchain.
- **xAI Grok 4.7 [Grk47]** — formalization and drafting in Cursor: typed linear syntax and metatheory, the intrinsic CP-map and superoperator-module substrate, first-order type objects, primitive agreement, fragment denotation packaging, and the proved-versus-objective boundary of this narrative. Every emitted proof term was checked by the Lean kernel.
- **Anthropic Claude Opus 5.5 [Cla55]** — formalization and refactoring in Cursor: Route A fragment denotation, quotation Hom-to-CQ covering-set bridges, N-qubit OpenQASM staging packaging, CMU report narrative alignment, and proof cleanup. Every emitted proof term was checked by the Lean kernel.
- **OpenAI GPT 5.6 [Gpt56]** — substantive Palomar editorial and packaging passes in Cursor (`statement_alignment`, `definition_fidelity`, `literature_notability`, and `synthesis`), plus claim-boundary review against `THEOREMS.md`. Those passes review claims; they do not replace kernel-checked Lean.
- **Cursor Composer 2.5 [Cmp25]** — lighter Palomar editorial and codebase-navigation passes in Cursor (`classification`, `metadata`, and related packaging checks). Composer assists with repository-local edits; it does not replace kernel-checked Lean.

A Lean module index

Checked by `lake build`. Repository: <https://github.com/catskillsresearch/qlambda>. Vendored `vendor/scott1972` is pinned in `vendor/FROZEN.txt`.

A.1 QLambda project and Palomar

Role	File
QLambda root import graph	QLambda.lean
QLambda development	QLambda/CQ/Basic.lean

Role	File
QLambda development	QLambda/CQ/Domain.lean
QLambda development	QLambda/CQ/FiniteSemantics.lean
Composer/OpenQASM interchange	QLambda/Composer/CircuitSyntax.lean
Composer/OpenQASM interchange	QLambda/Composer/Denotation.lean
Composer/OpenQASM interchange	QLambda/Composer/Fixtures.lean
Composer/OpenQASM interchange	QLambda/Composer/MatrixSemantics.lean
Composer/OpenQASM interchange	QLambda/Composer/Model.lean
Composer/OpenQASM interchange	QLambda/Composer/OpenQASM.lean
Composer/OpenQASM interchange	QLambda/Composer/OpenQASMParser.lean
Composer/OpenQASM interchange	QLambda/Composer/Probability.lean
Composer/OpenQASM interchange	QLambda/Composer/Program.lean
Composer/OpenQASM interchange	QLambda/Composer/Syntax.lean
Composer/OpenQASM interchange	QLambda/Composer/WellFormed.lean
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/CPRepresentation.lean
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/CPRepresentationInstances.lean
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/CartesianClosed.lean
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/CompletedCP.lean
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/CompletedCPInstrument.lean
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/DiscreteSet.lean
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/Enriched.lean
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/Finite.lean
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/FiniteInstances.lean
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/Functor.lean
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/LNLModel.lean
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/LinearNonlinear.lean
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/OmegaCPO.lean
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/OmegaCartesianClosed.lean
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/OmegaCategory.lean
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/OmegaCategoryIso.lean
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/OmegaComplete.lean
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/OmegaCompleteInstances.lean
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/OmegaIdentityLNL.lean

Role	File
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/OmegaMap.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/OmegaMapCategory.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/OmegaMapClosed.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/OmegaMapFunctionSpace.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/OmegaMapFunctionSpaceInstances.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/OmegaMapInstances.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/OmegaObject.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/OmegaObjectInstances.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/OmegaSymmetricMonoidalClosed.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/PlainFunctor.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/Presheaf/AdditiveProduct.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/Presheaf/AdmissibleMatrix.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/Presheaf/AmbientCPBang.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/Presheaf/AmbientCPBangAdmissible.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/Presheaf/AmbientCPComonoid.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/Presheaf/AmbientCPGate8TestSuite.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/Presheaf/AmbientCPModule.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/Presheaf/AmbientCPModuleInstances.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/Presheaf/Basis.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/Presheaf/BasisGenerated.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/Presheaf/Bilinear.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/Presheaf/BilinearSums.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/Presheaf/BiorthogonalCategory.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/Presheaf/CPMap.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/Presheaf/CPMapInstances.lean</code>

Role	File
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/Presheaf/CanonicalReflexivity.lean
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/Presheaf/CategoryPresentation.lean
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/Presheaf/Classical.lean
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/Presheaf/ClassicalCategory.lean
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/Presheaf/ClassicalMonoidal.lean
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/Presheaf/ClassicalObject.lean
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/Presheaf/ClassicalRepresentableOne.lean
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/Presheaf/ClassicalZero.lean
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/Presheaf/ClassicalZeroInstances.lean
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/Presheaf/ClosedBasis.lean
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/Presheaf/ClosedCoefficient.lean
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/Presheaf/ClosedGenerated.lean
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/Presheaf/ClosedGeneration.lean
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/Presheaf/Comonoid.lean
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/Presheaf/ComonoidHom.lean
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/Presheaf/DayBangBoundary.lean
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/Presheaf/DayClosedPresentation.lean
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/Presheaf/DayCoend.lean
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/Presheaf/DayCoendSum.lean
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/Presheaf/DayComonoidAdmissible.lean
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/Presheaf/DayComonoidCoassoc.lean
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/Presheaf/DayComonoidCofree.lean

Role	File
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/Presheaf/Day ComonoidCore.lean
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/Presheaf/Day ComonoidCounit.lean
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/Presheaf/Day ComonoidRouteA.lean
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/Presheaf/Day InternalHom.lean
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/Presheaf/Day Negation.lean
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/Presheaf/DayTensor Basic.lean
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/Presheaf/DayTensor Coherence.lean
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/Presheaf/DayTensor Presentation.lean
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/Presheaf/DayTensor Representable.lean
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/Presheaf/ Exponential.lean
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/Presheaf/ ExponentialCore.lean
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/Presheaf/Fiber.lean
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/Presheaf/Fiber Instances.lean
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/Presheaf/Generated. lean
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/Presheaf/HasActSum FromDim.lean
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/Presheaf/HasActSum FromDimInstances.lean
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/Presheaf/HasActSum FromDim_cpmModule.lean
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/Presheaf/HasActSum FromDim_zeroModule.lean
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/Presheaf/Hom.lean
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/Presheaf/Hom Instances.lean
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/Presheaf/Internal HomRepresentable.lean
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/Presheaf/LNL.lean
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/Presheaf/Module. lean

Role	File
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/Presheaf/ModuleChoiSum.lean
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/Presheaf/ModuleIso.lean
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/Presheaf/Monoidal.lean
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/Presheaf/NegationData.lean
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/Presheaf/OmegaEnriched.lean
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/Presheaf/OmegaEnrichedInstances.lean
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/Presheaf/OrthogonalPseudoBasis.lean
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/Presheaf/PartialCountableSum.lean
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/Presheaf/PseudoBasis.lean
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/Presheaf/PseudoRepresentability.lean
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/Presheaf/PseudoRepresentable.lean
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/Presheaf/RepresentableBipolar/BornDensity.lean
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/Presheaf/RepresentableBipolar/BornExpectationExt.lean
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/Presheaf/RepresentableBipolar/BornHomogeneity.lean
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/Presheaf/RepresentableBipolar/BornMatch.lean
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/Presheaf/RepresentableBipolar/BornPolarForm.lean
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/Presheaf/RepresentableBipolar/EffectFamily.lean
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/Presheaf/RepresentableBipolar/EffectSeparation.lean

Role	File
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/Presheaf/RepresentableBipolar/NormalizedCup.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/Presheaf/RepresentableBipolar/Surjectivity.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/Presheaf/SigmaMon.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/Presheaf/Summation.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/Presheaf/Superoperator.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/Presheaf/SuperoperatorInstances.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/Presheaf/SuperoperatorInstrument.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/Presheaf/SuperoperatorModule.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/Presheaf/SymmetricElement.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/Presheaf/SymmetricElementInstances.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/Presheaf/SymmetricEquivalenceComonoidHom.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/Presheaf/SymmetricPower.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/Presheaf/SymmetricPowerCore.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/Presheaf/TrackLDeferral.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/Presheaf/Yoneda.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/Presheaf/biorthogonalHomOmegaComplete.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/Presheaf/biorthogonalHomOrderBot.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/Presheaf/biorthogonalHomPartialOrder.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/Presheaf/classicalHomOmegaComplete.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/Presheaf/classicalHomOrderBot.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/Presheaf/classicalHomPartialOrder.lean</code>

Role	File
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/Presheaf/cpmModule_ambientCP.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/Presheaf/instAddCPMap.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/Presheaf/instAddCommMonoidCPMap.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/Presheaf/instLECPMap.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/Presheaf/instModuleNNRealCPMap.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/Presheaf/instOrderBotCPMap.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/Presheaf/instOrderBotSuperoperator.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/Presheaf/instPartialOrderCPMap.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/Presheaf/instPartialOrderSuperoperator.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/Presheaf/instSMulNNRealCPMap.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/Presheaf/instZeroCPMap.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/Presheaf/instZeroDayCarrier.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/Presheaf/instZeroDayRaw.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/Presheaf/instZeroFiberCarrier.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/Presheaf/instZeroHom.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/Presheaf/instZeroSuperoperator.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/Presheaf/instZeroSymmetricElement.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/Presheaf/omegaComplete.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/Presheaf/setoid.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/Presheaf/unitHomOmegaComplete.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/Presheaf/unitHomOrderBot.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/Presheaf/unitHomPartialOrder.lean</code>

Role	File
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/ProjectionChain.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/QObj.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/QuantumCPO.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/QuantumCPOCategory.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/QuantumCategory.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/QuantumClassical.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/QuantumFunction.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/QuantumFunctionInstances.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/QuantumLNL.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/QuantumMonoidal.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/QuantumPoset.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/QuantumRel.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/QuantumRelAtoms.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/QuantumRelChains.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/QuantumRelComp.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/QuantumRelDagger.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/QuantumRelExamples.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/QuantumRelFunction.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/QuantumRelInstances.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/QuantumRelational.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/QuantumRelations.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/QuantumSet.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/QuantumSetInstances.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/QuantumSets.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/RecursiveObject.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/RecursiveTypes.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/ScottFunction.lean</code>

Role	File
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/ScottFunctionInstances.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/SetHom.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/SetHomInstances.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/SymmetricMonoidalClosed.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/instBotQuantumRel.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/instBoundedOrderQuantumRel.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/instCoeFunOmegaMap.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/instCoeFunSetHom.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/instCoeScottFunction.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/instCoeSortOmegaObject.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/instCompleteLatticeQuantumRel.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/instDecidableEqLiftSetAtom.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/instDecidableEqSumAtom.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/instDecidableEqTensorAtom.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/instFiniteAtomic.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/instFiniteBit.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/instFiniteEmpty.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/instFiniteLiftSet.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/instFiniteQubit.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/instFiniteSum.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/instFiniteTensor.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/instFiniteUnit.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/instFintypeLiftSetAtom.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/instInfSetQuantumRel.lean</code>

Role	File
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/instInhabitedAtomicAtom.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/instInhabitedQubitAtom.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/instInhabitedUnitAtom.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/instLELiftSetAtom.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/instLEOmegaMap.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/instLEQuantumFunction.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/instLEQuantumRel.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/instLEScottFunction.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/instLESetHom.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/instLatticeQuantumRel.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/instOmegaComplete.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/instOmegaCompleteFunctionSpace.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/instOmegaCompleteOfCompleteLattice.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/instOmegaCompleteProd.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/instOmegaCompleteSetHom.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/instOrderBotOmegaMap.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/instPartialOrderLiftSetAtom.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/instPartialOrderOmegaMap.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/instPartialOrderQuantumFunction.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/instPartialOrderQuantumRel.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/instPartialOrderScottFunction.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/instPartialOrderSetHom.lean</code>
Quantum relation, qCPO, and LNL semantics	<code>QLambda/Domain/instPreorderCPPresentation.lean</code>

Role	File
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/instPreorderLiftSetAtom.lean
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/instSemilatticeInfQuantumRel.lean
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/instSemilatticeSupQuantumRel.lean
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/instSupSetQuantumRel.lean
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/instTopQuantumRel.lean
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/instUniqueAtomicAtom.lean
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/instUniqueQubitAtom.lean
Quantum relation, qCPO, and LNL semantics	QLambda/Domain/instUniqueUnitAtom.lean
QLambda development	QLambda/FiniteInstrumentComp.lean
QLambda development	QLambda/KrausFamily.lean
QLambda development	QLambda/KrausFamilyInstances.lean
Typed linear language, runtime, and circuit correspondence	QLambda/Linear/Circuit.lean
Typed linear language, runtime, and circuit correspondence	QLambda/Linear/Compilation.lean
Typed linear language, runtime, and circuit correspondence	QLambda/Linear/Config.lean
Typed linear language, runtime, and circuit correspondence	QLambda/Linear/Context.lean
Typed linear language, runtime, and circuit correspondence	QLambda/Linear/Denotation.lean
Typed linear language, runtime, and circuit correspondence	QLambda/Linear/DenotationInstances.lean
Typed linear language, runtime, and circuit correspondence	QLambda/Linear/Elaboration.lean
Typed linear language, runtime, and circuit correspondence	QLambda/Linear/Examples.lean
Typed linear language, runtime, and circuit correspondence	QLambda/Linear/FragmentAdequacy.lean
Typed linear language, runtime, and circuit correspondence	QLambda/Linear/FragmentBranching.lean
Typed linear language, runtime, and circuit correspondence	QLambda/Linear/FragmentClassicalBitChannels.lean
Typed linear language, runtime, and circuit correspondence	QLambda/Linear/FragmentClassicalBitCoassoc/Psi_tensor_id_at_copy.lean

Role	File
Typed linear language, runtime, and circuit correspondence	QLambda/Linear/FragmentClassicalBitCoassoc/bitCoassocLeft.lean
Typed linear language, runtime, and circuit correspondence	QLambda/Linear/FragmentClassicalBitCoassoc/bitCoassocLeftPre.lean
Typed linear language, runtime, and circuit correspondence	QLambda/Linear/FragmentClassicalBitCoassoc/bitCoassocLeftPre_choi.lean
Typed linear language, runtime, and circuit correspondence	QLambda/Linear/FragmentClassicalBitCoassoc/bitCoassocLeftPre_choi_collapsed.lean
Typed linear language, runtime, and circuit correspondence	QLambda/Linear/FragmentClassicalBitCoassoc/bitCoassocLeft_eq_pre.lean
Typed linear language, runtime, and circuit correspondence	QLambda/Linear/FragmentClassicalBitCoassoc/bitCoassocLeft_eq_right.lean
Typed linear language, runtime, and circuit correspondence	QLambda/Linear/FragmentClassicalBitCoassoc/bitCoassocRight.lean
Typed linear language, runtime, and circuit correspondence	QLambda/Linear/FragmentClassicalBitCoassoc/bitCoassocRight_choi.lean
Typed linear language, runtime, and circuit correspondence	QLambda/Linear/FragmentClassicalBitCoassoc/bitCoassocRight_choi_collapsed.lean
Typed linear language, runtime, and circuit correspondence	QLambda/Linear/FragmentClassicalBitCoassoc/bitCopy_choi.lean
Typed linear language, runtime, and circuit correspondence	QLambda/Linear/FragmentClassicalBitCoassoc/bitCopy_comp_dephase_choi.lean
Typed linear language, runtime, and circuit correspondence	QLambda/Linear/FragmentClassicalBitCoassoc/bitCopy_comp_dephase_raw_choi_pair.lean
Typed linear language, runtime, and circuit correspondence	QLambda/Linear/FragmentClassicalBitCoassoc/copyIdx.lean
Typed linear language, runtime, and circuit correspondence	QLambda/Linear/FragmentClassicalBitCoassoc/id_tensor_Psi_at_copy.lean
Typed linear language, runtime, and circuit correspondence	QLambda/Linear/FragmentClassicalBitCoassoc/identity_choi_pair.lean
Typed linear language, runtime, and circuit correspondence	QLambda/Linear/FragmentClassicalBitCoassoc/tensorAssociatorEquiv_two_two_two.lean

Role	File
Typed linear language, runtime, and circuit correspondence	QLambda/Linear/FragmentClassicalBitCoassoc/tensorAssociator_two_two_two.lean
Typed linear language, runtime, and circuit correspondence	QLambda/Linear/FragmentClassicalBitCoassoc/tripleCopyChoi.lean
Typed linear language, runtime, and circuit correspondence	QLambda/Linear/FragmentClassicalBitModule.lean
Typed linear language, runtime, and circuit correspondence	QLambda/Linear/FragmentCoherence.lean
Typed linear language, runtime, and circuit correspondence	QLambda/Linear/FragmentCoherenceCore.lean
Typed linear language, runtime, and circuit correspondence	QLambda/Linear/FragmentContext.lean
Typed linear language, runtime, and circuit correspondence	QLambda/Linear/FragmentContextComonoid.lean
Typed linear language, runtime, and circuit correspondence	QLambda/Linear/FragmentContextDay.lean
Typed linear language, runtime, and circuit correspondence	QLambda/Linear/FragmentContextObjects.lean
Typed linear language, runtime, and circuit correspondence	QLambda/Linear/FragmentContextSplit.lean
Typed linear language, runtime, and circuit correspondence	QLambda/Linear/FragmentDenotation.lean
Typed linear language, runtime, and circuit correspondence	QLambda/Linear/FragmentDenotationModel.lean
Typed linear language, runtime, and circuit correspondence	QLambda/Linear/FragmentDenoteEq.lean
Typed linear language, runtime, and circuit correspondence	QLambda/Linear/FragmentIdentityBeta.lean
Typed linear language, runtime, and circuit correspondence	QLambda/Linear/FragmentIte.lean
Typed linear language, runtime, and circuit correspondence	QLambda/Linear/FragmentIteBeta.lean
Typed linear language, runtime, and circuit correspondence	QLambda/Linear/FragmentIteBranching.lean
Typed linear language, runtime, and circuit correspondence	QLambda/Linear/FragmentItePrep.lean
Typed linear language, runtime, and circuit correspondence	QLambda/Linear/FragmentMeasuredSimulation.lean
Typed linear language, runtime, and circuit correspondence	QLambda/Linear/FragmentModel.lean
Typed linear language, runtime, and circuit correspondence	QLambda/Linear/FragmentNDenotation.lean

Role	File
Typed linear language, runtime, and circuit correspondence	QLambda/Linear/FragmentPhysicalBit.lean
Typed linear language, runtime, and circuit correspondence	QLambda/Linear/FragmentPhysicalBitInstances.lean
Typed linear language, runtime, and circuit correspondence	QLambda/Linear/FragmentQuoteBridgeExt.lean
Typed linear language, runtime, and circuit correspondence	QLambda/Linear/FragmentRuntimeCore.lean
Typed linear language, runtime, and circuit correspondence	QLambda/Linear/FragmentRuntimeN.lean
Typed linear language, runtime, and circuit correspondence	QLambda/Linear/FragmentSourceCircuitN.lean
Typed linear language, runtime, and circuit correspondence	QLambda/Linear/FragmentStepCongruence.lean
Typed linear language, runtime, and circuit correspondence	QLambda/Linear/FragmentSubstBeta.lean
Typed linear language, runtime, and circuit correspondence	QLambda/Linear/FragmentUnpairBeta.lean
Typed linear language, runtime, and circuit correspondence	QLambda/Linear/FragmentWeightedSimulation.lean
Typed linear language, runtime, and circuit correspondence	QLambda/Linear/Metatheory.lean
Typed linear language, runtime, and circuit correspondence	QLambda/Linear/Operational.lean
Typed linear language, runtime, and circuit correspondence	QLambda/Linear/PresheafFragmentModel.lean
Typed linear language, runtime, and circuit correspondence	QLambda/Linear/PrimitiveSuperoperator.lean
Typed linear language, runtime, and circuit correspondence	QLambda/Linear/Quotation.lean
Typed linear language, runtime, and circuit correspondence	QLambda/Linear/QuotationGeneral.lean
Typed linear language, runtime, and circuit correspondence	QLambda/Linear/RegFile.lean
Typed linear language, runtime, and circuit correspondence	QLambda/Linear/Runtime.lean
Typed linear language, runtime, and circuit correspondence	QLambda/Linear/RuntimeCore.lean
Typed linear language, runtime, and circuit correspondence	QLambda/Linear/SemanticFragment.lean
Typed linear language, runtime, and circuit correspondence	QLambda/Linear/StageResult.lean
Typed linear language, runtime, and circuit correspondence	QLambda/Linear/StagedValue.lean

Role	File
Typed linear language, runtime, and circuit correspondence	QLambda/Linear/Substitution.lean
Typed linear language, runtime, and circuit correspondence	QLambda/Linear/Syntax.lean
Typed linear language, runtime, and circuit correspondence	QLambda/Linear/TypeFormation.lean
Typed linear language, runtime, and circuit correspondence	QLambda/Linear/TypeFormationInstances.lean
Typed linear language, runtime, and circuit correspondence	QLambda/Linear/TypeInterpretation.lean
Typed linear language, runtime, and circuit correspondence	QLambda/Linear/Typing.lean
Typed linear language, runtime, and circuit correspondence	QLambda/Linear/instDecidableAdmissibleAt.lean
Typed linear language, runtime, and circuit correspondence	QLambda/Linear/instDecidableDoesNotContainAt.lean
Typed linear language, runtime, and circuit correspondence	QLambda/Linear/instDecidableDuplicableAt.lean
Typed linear language, runtime, and circuit correspondence	QLambda/Linear/instDecidablePositiveRec.lean
Typed linear language, runtime, and circuit correspondence	QLambda/Linear/instDecidableStrictlyPositiveAt.lean
Typed linear language, runtime, and circuit correspondence	QLambda/Linear/instDecidableWellScopedAt.lean
Typed linear language, runtime, and circuit correspondence	QLambda/Linear/instZeroClassicalBitCarrier.lean
Typed linear language, runtime, and circuit correspondence	QLambda/Linear/operationalSetoid.lean
QLambda development	QLambda/NormalizedDensity.lean
QLambda development	QLambda/QuantumInstrument.lean
QLambda development	QLambda/QuantumInstruments.lean
QLambda development	QLambda/QuantumOperation.lean
QLambda development	QLambda/QuantumQubit.lean
QLambda development	QLambda/QuantumRuntimeState.lean
QLambda development	QLambda/QuantumStateSpace.lean
QLambda development	QLambda/SubNormalizedDensity.lean
QLambda development	QLambda/SubNormalizedDensityInstances.lean
QLambda development	QLambda/instIsPreorderResidualRefines.lean
QLambda development	QLambda/instOrderBotSubNormalizedDensity.lean
QLambda development	QLambda/instPartialOrderSubNormalizedDensity.lean

Role	File
Palomar challenge statements	<code>Challenge.lean</code>
Palomar compared solutions	<code>Solution.lean</code>

A.2 Vendored Scott1972 (subset of rows; full tree under vendor/scott1972/)

Role	File
Vendored Scott 1972 foundation	<code>vendor/scott1972/Scott1972.lean</code>
Vendored Scott 1972 foundation	<code>vendor/scott1972/Scott1972/ ContinuousLattice/Constructions. lean</code>
Vendored Scott 1972 foundation	<code>vendor/scott1972/Scott1972/ ContinuousLattice/FunctionSpace Tower.lean</code>
Vendored Scott 1972 foundation	<code>vendor/scott1972/Scott1972/ ContinuousLattice/FunctionSpaces. lean</code>
Vendored Scott 1972 foundation	<code>vendor/scott1972/Scott1972/ ContinuousLattice/Injective.lean</code>
Vendored Scott 1972 foundation	<code>vendor/scott1972/Scott1972/ ContinuousLattice/InverseLimits. lean</code>
Vendored Scott 1972 foundation	<code>vendor/scott1972/Scott1972/ ContinuousLattice/Milner Correction.lean</code>
Vendored Scott 1972 foundation	<code>vendor/scott1972/Scott1972/ ContinuousLattice/ScottMaps.lean</code>
Vendored Scott 1972 foundation	<code>vendor/scott1972/Scott1972/ ContinuousLattice/Specialization. lean</code>
Vendored Scott 1972 foundation	<code>vendor/scott1972/Scott1972/ ContinuousLattice/Theorem212.lean</code>
Vendored Scott 1972 foundation	<code>vendor/scott1972/Scott1972/ ContinuousLattice/WayBelow.lean</code>

Primary OCR source: `sources/ScottContinLatt1972.md` — transcription of [Sco72].

Total indexed: 360 files (349 project + 11 vendor), 60713 lines of Lean.