

A Lean 4 Formalization of Scott’s Measurement Structures and Linear Inequalities (1964)

Lars Warren Ericson¹

¹Catskills Research Company

¹<https://github.com/catskillsresearch/scott1964>

¹lars.ericson@catskillsresearch.com

September 6, 2026

ORCID: 0000-0001-8299-9361

Primary Category: math.LO (Logic)

Secondary Category: econ.TH (Theoretical Economics)

Abstract

This note records a Lean 4 / mathlib formalization of Dana Scott’s 1964 paper *Measurement Structures and Linear Inequalities*. Scott begins with a finite-dimensional separation criterion for systems of homogeneous linear inequalities and then reuses it for three representation problems: intransitive indifference, ordered utility differences, and qualitative probability. The Lean development proves all eight numbered theorems in the paper: Theorems 1.1–1.4, 2.1, 3.1, 3.2, and 4.1.

The sorry-free library consists of approximately 4,200 lines in 21 modules under `Scott1964/MeasurementStruct`. It also formalizes Scott’s ordered-group and signed-charge remarks, the literal characteristic-vector form of probability cancellation, a finite Kraft–Pratt–Seidenberg counterexample, and a separately labelled modern reconstruction of an infinite probability theorem. The latter uses an explicit `GeneralizedKelleyCondition`; it is not attributed to Scott’s unstated, unpublished extension mentioned in the paper’s closing paragraph.

The repository has no project-defined axioms and no Lake dependency beyond mathlib. Completed proofs use the standard classical mathlib footprint `[propext, Quot.sound, Classical.choice]`. Deliberate proof holes occur only in the Mathlib-only `Challenge.lean`; `Solution.lean` re-exports the kernel-checked development. The project is packaged for `Palomar` with a Challenge / Solution pair and `formalization.yaml` metadata.

Dana Scott was not contacted and did not participate in, review, or endorse this formalization. Lean code was written by AI agents under the direction and review of the author, who takes sole responsibility for the mathematical content.

Proofs in this note are summarized at the level of their main constructions. Short representative Lean fragments are copied from the library; a generated review copy with its configured source appendix is available through `(scripts/generate_arxiv_with_code.sh → arxiv_with_code.md)`.

- **Cursor [Cur26]** — agent-assisted editing in the Cursor IDE: formalizing Scott’s 1964 *Measurement Structures and Linear Inequalities* in Lean 4 / mathlib, `lake build` repair, vision-OCR transcription, drafting this narrative (`arxiv.md`), and tracking the formalized inventory. Generated Lean was provisional until it compiled under the pinned toolchain.
- **Cursor Composer 2.5 Fast [Cmp25]** — routine multi-step work: module scaffolding, dependency-ordered wiring of `Scott1964/MeasurementStructures/`, documentation, and medium proof obligations where the strategy was already fixed.

- **Anthropic Claude Sonnet 5 (medium reasoning)** [Son26] — day-to-day formalization and proof-engineering in Cursor at the medium reasoning tier: inventory and narrative maintenance, module wiring, and medium-complexity Lean obligations where the proof strategy was already fixed.
- **Anthropic Claude Opus 4.8 (high reasoning)** [Ant26] — selective use for the heaviest proof work. Every emitted proof term was checked by the Lean kernel.

1 Introduction

Measurement theory asks when qualitative comparisons can be represented by real numbers. A relation on alternatives might be represented by utility differences, a relation on pairs might be represented by the sum of two utilities, and a relation on events might be represented by a finitely additive probability. The difficult direction is sufficiency: given only qualitative axioms, why must a numerical representation exist?

Scott’s paper gives a common answer. Encode each qualitative comparison as a linear inequality between vectors, then apply a finite separation theorem. For a finite symmetric set X in a real vector space and a chosen “nonnegative” part $N \subseteq X$, a realization is a linear functional φ satisfying

$$x \in N \iff 0 \leq \varphi(x) \quad (x \in X).$$

Sign completeness ensures that every $x \in X$ receives at least one weak sign. Cancellation prevents a positive combination of strictly positive vectors from collapsing into the neutral span. Together these conditions separate the strict cone from the neutral subspace and produce φ . Rational coordinates permit positive real coefficients to be replaced by integer multiplicities, yielding Scott’s unweighted sequence conditions.

The three applications use different incidence vectors but the same engine.

1. **Intransitive indifference.** A strict relation P on a finite set is represented by $xPy \iff f(x) \geq f(y) + 1$.
2. **Ordered differences.** Comparisons of pairs are represented first by $f(x) + f'(x')$, then reversal combines the two scales into one utility difference $f(x) - f(y)$.
3. **Subjective probability.** An event in a finite Boolean algebra is sent to its 0/1 incidence vector on atoms. A separating functional gives atom weights, which normalize to a probability.

The formalization follows this mathematical decomposition rather than treating the eight theorems as unrelated endpoints. It also records where a proof route differs from Scott’s exposition: most importantly, Theorem 2.1 currently uses a direct finite Scott–Suppes staircase construction, while Scott’s local cycle reductions are formalized separately.

2 Scope and layout

The library has 21 Lean modules and approximately 4,200 lines. The root module `Scott1964/MeasurementStru` re-exports the complete development imported by `Solution.lean`.

Module cluster	Role
<code>FinHead</code>	Stable distinguished index in <code>Fin (n + 1)</code> cancellation schemes

Module cluster	Role
LinearInequalities/Definitions, Separation, Sequences	Geometric and sequence forms of Scott's finite inequality criterion
LinearInequalities/Rationalization, ScottTheorems	Rational coefficient clearing and Theorems 1.1–1.4
LinearInequalities/OrderedGroup	Finite local real embedding and lexicographic obstruction
Preference/Direct, Intransitive, Cycle	Scott–Suppes construction, Theorem 2.1, and source proof reductions
Differences/Pair, Ordered	Incidence vectors and Theorems 3.1–3.2
Probability/Basic, Atoms, Finite	Finitely additive probabilities, atom vectors, signed charges, and Theorem 4.1
Probability/KPSCounterexample	Exact five-atom KPS qualitative order and nonrepresentability
Probability/Infinite/*	Universal event space, Hahn–Banach/Kelley machinery, and the modern infinite reconstruction
Challenge / Solution	Palomar statement of record and sorry-free realization

The published scope is exactly the eight numbered theorems. Supplementary results are clearly separated from that inventory:

- `finite_local_real_embedding` formalizes Scott's ordered-group observation;
- `scott_p15_signed_charge` and its vector form formalize the p. 15 signed-measure characterization;
- `deFinetti_axioms_insufficient` integrates the KPS five-atom obstruction;
- `reconstructed_infinite_theorem_4_1` is a modern theorem motivated by, but not identified with, Scott's closing announcement.

The project is standalone. It imports none of the sibling formalizations of Scott's later domain-theory papers.

3 How the proofs use mathlib

Mathlib supplies the finite-dimensional analytic and algebraic substrate. The predicates and reductions specific to Scott's paper are defined in this repository.

Finite-dimensional separation. The key imported result is `geometric_hahn_banach_compact_closed` from mathlib's locally convex separation library. The formalization specializes it to a finite convex hull and a finite-dimensional subspace. It then proves that the separator vanishes on the subspace and is strictly positive on the finite set:

Lean 4 source

```
theorem finite_strict_separation {A B : Set L} (hA : A.Finite) :
  Disjoint (convexHull ? A) (Submodule.span ? B : Set L) <->
    exists phi : Module.Dual ? L,
      (forall x in A, 0 < phi x) /\ forall x in B, phi x = 0
```

Finite combinatorics. Cancellation schemes are indexed by $\text{Fin } (n + 1)$ so that a distinguished comparison always exists. `Equiv.Perm` expresses Scott’s two independent permutations in the pair and difference problems. `Finset` sums, subtype cardinalities, and `Equiv.ofFiberEquiv` turn equality of incidence-vector sums into actual permutations.

Linear algebra over function spaces. Scott’s vectors are represented as functions into $\cdot$. Pair incidence vectors live in $\text{Sum } A \ A' \rightarrow \cdot$; event vectors live in $\{a : B \ // \ \text{IsAtom } a\} \rightarrow \cdot$. Mathlib linear maps provide the representing functionals, while `Pi.single` and finite sums implement the coordinate encodings.

Finite Boolean algebras. Mathlib’s `BooleanAlgebra`, `IsAtom`, and finite-lattice API support decomposition of each event as the supremum of its atoms. The formalization proves both the atom-count and vector-sum versions of cancellation and constructs finitely additive functions by integrating atom weights.


Classical quotient orders. The direct proof of Theorem 2.1 uses `Antisymmetrization` of a finite total preorder. Substitutability classes remove duplicate preference profiles, and a recursively constructed staircase gives the numerical representation.

Functional analysis for the supplementary infinite theorem. The universal event space is a normed span of evaluation functions on all finitely additive probabilities. Continuous dual separation and a countable Kelley cover produce one functional that is nonnegative on weak comparisons and positive on strict comparisons.

What mathlib does not supply is Scott’s measurement-theoretic interface: the sign and cancellation conditions, relation-difference encoding, Scott–Suppes weak order, pair permutation principle, atom-vector transport, or generalized Kelley condition. Those constructions are developed here.


4 Proof dependency structure

The main published development follows one linear-inequality core and three applications.

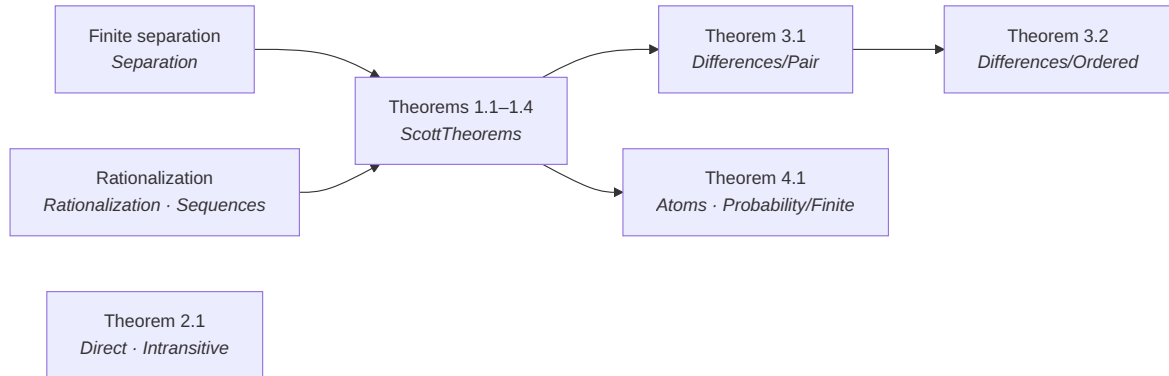

Theorem 2.1 is shown as an independent branch because its completed proof is the direct Scott–Suppes construction. The source-facing cycle lemmas remain available for a future proof routed through the section-1 machinery.

The finite probability and modern infinite developments have distinct foundations:

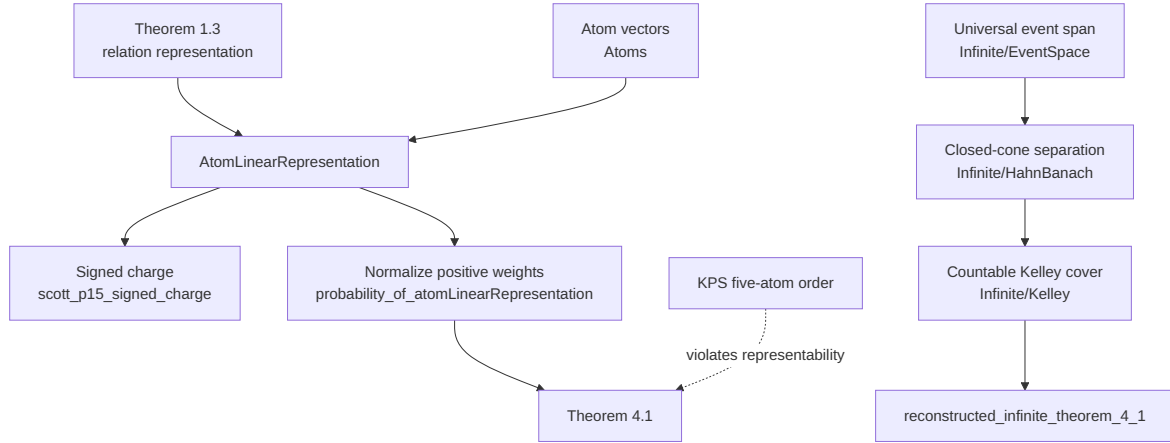

5 Theorem inventory

Paper result	Lean theorem	Content
Theorem 1.1	<code>LinearInequalities.scott_theorem_1_1</code>	Finite symmetric sign systems: realizability iff sign completeness and positive-weight cancellation
Theorem 1.2	<code>LinearInequalities.scott_theorem_1_2</code>	Rational-coordinate version with unweighted repeated summands
Theorem 1.3	<code>LinearInequalities.scott_theorem_1_3</code>	Complete relations on finite rational vectors: realizability iff paired equal-sums cancellation
Theorem 1.4	<code>LinearInequalities.scott_theorem_1_4</code>	Realizability iff extension to a strictly monotonic relation on the additive closure
Theorem 2.1	<code>theorem_2_1</code>	Intransitive-indifference representation with unit discrimination threshold
Theorem 3.1	<code>theorem_3_1</code>	Additive representation of pair comparisons by two utilities
Theorem 3.2	<code>theorem_3_2</code>	Ordered-difference representation by one utility
Theorem 4.1	<code>theorem_4_1</code>	Finite qualitative probability representation

Further source-facing or diagnostic results:

Topic	Lean theorem	Status
Literal form of (4_B)	<code>theorem_4_1_vector</code>	Equivalent vector-sum version of Theorem 4.1

Topic	Lean theorem	Status
Scott’s p. 15 signed charge	<code>scott_p15_signed_charge,</code> <code>_vector</code>	Proved without normalization or nonnegativity
Ordered-group remark	<code>finite_local_real_</code> <code>embedding</code>	Proved for each finite subset
Global obstruction	<code>no_global_real_additive_</code> <code>lex_realization</code>	Lexicographic $\times$ has no global additive real representation
KPS counterexample	<code>deFinetti_axioms_</code> <code>insufficient</code>	Exact five-atom order satisfies bundled de Finetti axioms but has no probability realization
Infinite analogue	<code>Probability.Infinite.reconstruction</code> <code>infinite_theorem_4_1</code>	Modified result under GeneralizedKelleyCondition ; not attributed to Scott

The Palomar comparison locks all eight published theorems and the separately labelled infinite reconstruction, together with the 28 definitions appearing in their types. The Challenge imports only Mathlib; the Solution imports the corresponding completed declarations.

6 Proof notes

6.1 Theorem 1.1 — finite separation

Let X be finite and symmetric, and let $N \subseteq X$ denote the vectors declared nonnegative. The strict vectors are those $x \in N$ for which $-x \notin N$; the neutral vectors have both signs. Scott’s cancellation hypothesis states geometrically that the convex hull of the strict set is disjoint from the linear span of the neutral set.

`weightedCancellation_of_sequence` derives this geometric disjointness from the literal positive-weight sequence condition. It expands a hypothetical intersection point twice: as a convex combination of strict vectors and as a linear combination of neutral vectors. Signs of the latter coefficients are absorbed using symmetry, producing one positive finite dependence. Sequence cancellation would force the negative of a strict vector into N , a contradiction.

`finite_strict_separation` then produces a linear functional positive on strict vectors and zero on neutral vectors. Sign completeness proves that the functional realizes N :

Lean 4 source

```
theorem scott_theorem_1_1 {X N : Set L}
  (hX : X.Finite) (hsym : Symmetric X) :
  Realizable X N <->
  SignComplete X N /\ WeightedSequenceCancellation X N
```

The necessary direction is elementary: apply a realizing functional to a positive dependence and compare signs.

6.2 Theorem 1.2 — rationalization

Theorem 1.2 replaces arbitrary positive real coefficients with repeated unit coefficients when vectors have rational coordinates. The nontrivial direction of `UnweightedSequenceCancellation.rationalWeights` is factored through `Rationalization.lean`:

1. a positive real dependence among finitely many rational vectors is replaced by a positive rational dependence;
2. denominators are cleared to positive natural multiplicities;
3. each vector is repeated according to its multiplicity;
4. unweighted cancellation applies to the resulting finite sequence.

This is the precise point where `[Fintype S]` and `IsRationalSet X` enter. Theorem 1.1 then supplies the realizing functional.

6.3 Theorems 1.3 and 1.4 — relations and additive closure

For a relation R on a finite set Y , Theorem 1.3 moves from points to differences $x - y$. Completeness gives sign completeness of the difference set. Scott’s paired equal-sums condition gives unweighted cancellation:

$$\sum_i x_i = \sum_i y_i, \quad x_i R y_i \ (i \neq 0) \implies y_0 R x_0.$$

The proof constructs the symmetric rational difference set and applies Theorem 1.2. A short two-element cancellation argument ensures that the functional’s weak inequality implies the original relation rather than only some relation with the same positive cone.

Theorem 1.4 characterizes the same realizability by extension to the additive closure Y^+ . A realizing functional immediately defines the extension. Conversely, strict monotonicity gives paired cancellation by summing all comparisons except the distinguished one and cancelling equal totals:

Lean 4 source

```
theorem scott_theorem_1_4 {S : Type*} [Fintype S]
  {Y : Set (S -> ?)} {R : (S -> ?) -> (S -> ?) -> Prop}
  (hY : Y.Finite) (hYrat : IsRationalSet Y) :
  RelationRealizable Y R <=>
    exists Rplus,
      ExtendsOn Y (additiveClosure Y) R Rplus /\
      StrictlyMonotonic (additiveClosure Y) Rplus
```

6.4 Theorem 2.1 — intransitive indifference

Scott’s relation permits indifference to be intransitive while preserving a real representation with a fixed discrimination threshold:

$$xPy \iff f(x) \geq f(y) + 1.$$

The forward implications to irreflexivity and the two quadruple axioms are linear arithmetic. The completed converse uses a direct finite Scott–Suppes construction. `ScottWeakOrder` compares alternatives by their strict-preference profiles. The quadruple axioms make it a total preorder; `Antisymmetrization` quotients alternatives with identical profiles. On the finite quotient, lower sections are nested, and `finite_staircase_representation` recursively assigns real values with the required unit gap. The representation is then pulled back to alternatives.

Lean 4 source

```

theorem theorem_2_1 {A : Type u} [Fintype A] [Nonempty A]
  (P : A -> A -> Prop) :
  RealizablePreference P <=>
    PrefIrrefl P /\ PrefQuadA P /\ PrefQuadB P

```

The library also verifies Scott’s remarks around the theorem: every positive threshold is equivalent up to rescaling, every realization can be widened to a positive margin, and on a finite set the boundary can be avoided with a strict inequality. `Preference/Cycle.lean` separately proves transitivity and the three local cycle-shortening moves used in Scott’s printed route. There is not yet a second completed proof assembling those reductions through the section-1 linear-inequality theorem.

6.5 Theorems 3.1 and 3.2 — pairs and differences

For Theorem 3.1, a pair (x, x') is represented by an incidence vector having one unit coordinate in each side of $\text{Sum } A \ A'$. Equality of sums of such vectors means that the first coordinates and second coordinates occur with the same multiplicities. `pairVector_sum_eq_permutations` upgrades those fiberwise cardinality equalities to two permutations.

The pair relation is transported to the finite rational range of `pairVector`. Pair totality becomes relation completeness and Scott’s permutation axiom becomes paired sequence cancellation. Theorem 1.3 then returns a functional φ . Restricting φ to the two kinds of singleton coordinates yields f and f' :

Lean 4 source

```

theorem theorem_3_1 {A : Type u} {A' : Type v}
  [Fintype A] [Nonempty A] [Fintype A'] [Nonempty A']
  (V : A -> A' -> A -> A' -> Prop) :
  RealizableUtilityPair V <=> PairTotal V /\ PairPermutation V

```

Theorem 3.2 treats a difference comparison $D(x, y, z, w)$ first as a pair comparison represented by $g(x) + q(y)$. Reversal supplies the second inequality needed to combine the scales. The function $f(x) = g(x) - q(x)$ then represents the ordered differences. Thus the sufficiency proof is a short application of Theorem 3.1 plus `difference_of_pair_and_reversal`.

Condition (2_D) remains an infinite scheme: Lean quantifies over every $n : \mathbb{N}$ and both permutations of $\text{Fin } (n + 1)$. No finite truncation is claimed.

6.6 Theorem 4.1 — finite subjective probability

For a finite Boolean algebra B , `atomVector` x is the real-valued characteristic function of the atoms below x . It is injective, and finite additivity is coordinate addition on disjoint suprema.

Scott writes (4_B) as equality of algebraic sums of characteristic functions. The primary `ProbCancellation` uses the equivalent atom-counting reading stated immediately after the theorem: each atom occurs below equally many events on the two sides. `ProbVectorCancellation` is the literal vector-sum form, and the equivalence is proved explicitly:

Lean 4 source

```

theorem probVectorCancellation_iff_probCancellation :
  ProbVectorCancellation R <=> ProbCancellation R

```

Totality and cancellation are transported through the range of `atomVector` and discharged by Theorem 1.3, yielding `AtomLinearRepresentation` R . Evaluation of the resulting functional on atom vectors is already a finitely additive signed charge. Nontriviality makes its value at $\top$ positive; nonnegativity makes all event values nonnegative. Division by the top value normalizes the charge without changing comparisons:

Lean 4 source

```
theorem theorem_4_1 {B : Type u} [BooleanAlgebra B] [Fintype B]
  (R : B -> B -> Prop) :
  RealizableProbability R <=>
    ProbNontrivial R /\ ProbNonneg R /\
    ProbTotal R /\ ProbCancellation R
```

The structure `IsProbability` includes zero at $\perp$, normalization at $\top$, finite additivity on disjoint events, and nonnegativity. `IsSignedCharge` deliberately omits normalization and nonnegativity. This separation makes Scott’s p. 15 statement exact:

Lean 4 source

```
theorem scott_p15_signed_charge (R : B -> B -> Prop) :
  RealizableSignedCharge R <=> ProbTotal R /\ ProbCancellation R
```

Cancellation also derives reflexivity, transitivity, and both directions of de Finetti’s disjoint-union invariance. These lemmas connect Scott’s stronger cancellation criterion with the older qualitative-probability axioms.

6.7 Ordered groups and the lexicographic boundary

Scott observes after Theorem 1.4 that finite pieces of an ordered abelian group can be represented in the reals while preserving the addition equations visible in that piece. `finite_local_real_embedding` encodes order tests and local addition tests as rational coordinate vectors and applies Theorem 1.4. It produces an order-reflecting $f : S \rightarrow \mathbb{R}$ preserving every equation $x + y = z$ whose three terms lie in the finite set.

This local statement cannot be extended globally without an Archimedean hypothesis. The lexicographic group $\mathbb{Z} \times \mathbb{Z}$ supplies the counterexample. Its positive comparison is strictly monotonic on the additive closure of two generators, but any additive real representation would force one positive generator to dominate arbitrarily many multiples of the other. `no_global_real_additive_lex_realization` formalizes the contradiction.

6.8 The Kraft–Pratt–Seidenberg counterexample

`Probability/KPSCounterexample.lean` encodes the exact 32-event order on a five-atom powerset from Kraft, Pratt, and Seidenberg. Finite decidability is used to verify comparability, transitivity, bottom minimality, and de Finetti’s disjoint-union invariance. These are bundled as `DeFinettiAxioms`.

Nonrepresentability is not left to exhaustive computation. Finite additivity expresses every event weight as a sum of singleton weights, and selected strict comparisons in the KPS order force an impossible cycle of linear inequalities. Consequently:

Lean 4 source

```
theorem deFinetti_axioms_insufficient :
  DeFinettiAxioms KPSCe /\ not RealizableProbability KPSCe
```

`DeFinettiAxioms` uses de Finetti’s literal weak nontriviality condition $\neg R \perp \top$. Scott’s `ProbNontrivial` is stronger: $R \top \perp \wedge \neg R \perp \top$.

6.9 Modern reconstruction of an infinite analogue

Scott’s final paragraph announces an extension to infinite Boolean algebras but gives neither a theorem statement nor hypotheses. The repository therefore does not attempt to recover or

attribute that unpublished result. Instead it proves a modern analogue under a fully explicit condition.

`EventSpace.lean` embeds each event into the normed span of its evaluation function over all finitely additive probabilities. Stone-point indicators prove that this encoding is faithful. Weak comparisons generate a closed cone, described by its continuous-dual polar. Strict comparison vectors are covered by countably many closed convex upper sets avoiding zero—the `GeneralizedKelleyCondition`.

`Kelley.lean` separates each layer from zero and combines the separators with summable positive coefficients. The resulting continuous functional is nonnegative on every weak comparison and strictly positive on every strict comparison. Its value at $\top$ is positive, so normalization yields a finitely additive probability representing the relation:

Lean 4 source

```
theorem reconstructed_infinite_theorem_4_1 (R : B -> B -> Prop) :
  RealizableProbability R <=>
    ProbNontrivial R /\ ProbNonneg R /\ ProbTotal R /\
    GeneralizedKelleyCondition R
```

This theorem is a supplementary reconstruction, not a ninth theorem of Scott’s published paper.

7 Source fidelity

The working source is `sources/ScottMeasurement1964.pdf`. A searchable triple-pass vision transcription is generated at `sources/ScottMeasurement1964_vision.md` by `scripts/ocr_pdf_pipeline.sh`. The PDF and transcription are source material, not part of the Apache-2.0 grant.

7.1 Formal conventions

Scott writes finite sequences with an exceptional zeroth term. Lean uses `Fin (n + 1)` and the named index `finHead n`; this avoids empty-index edge cases and stabilizes the statements used by the Palomar Comparator.

Relations are oriented as “at least as preferred/probable.” Thus `RelationRealizable Y` states $R\ x\ y \leftrightarrow \varphi\ y \leq \varphi\ x$, and `RealizableProbability R` states $R\ x\ y \leftrightarrow x \geq y$. Scott’s strict comparison is represented by `StrictlyPreferred R x y := ¬ R y x`.

The finite probability theorem uses abstract finite Boolean algebras rather than a concrete powerset. Characteristic vectors are indexed by Boolean atoms, which is equivalent to choosing the atoms of a finite field of events.

The development is classical. The disclosed axiom footprint is `propext`, `Quot.sound`, and `Classical.choice`; no project axiom is declared.

7.2 Recorded divergences and limitations

- Theorem 2.1 is completed by the direct finite Scott–Suppes staircase construction. Scott’s local cycle reductions are formalized in `Preference/Cycle.lean`, but they are not assembled into an alternate section-1 proof.
- The primary `theorem_4_1` uses Scott’s atom-count explanation of `(4_B). theorem_4_1_vector` separately proves the equivalent literal equality of characteristic-vector sums.
- Scott’s closing paragraph does not state his infinite theorem. `reconstructed_infinite_theorem_4_1` is explicitly a modern Hahn–Banach/Kelley reconstruction under `GeneralizedKelleyCondi`

- The KPS development formalizes an external 1958 counterexample used to delimit the strength of de Finetti’s axioms; it is not a numbered theorem of Scott’s article.
- No external mathematical review has been performed. Every proof is checked by the Lean kernel, but the project remains self-assessed.

8 Palomar statement of record

`Challenge.lean` contains Mathlib-only declarations with deliberate theorem holes. `Solution.lean` imports the completed library. `comparator.json` compares the nine theorem names (eight published theorems plus the separately labelled infinite reconstruction) and 28 definitions in their statement closure.

File	Role
<code>Challenge.lean</code>	Mathlib-only statement of record with deliberate <code>sorry</code>
<code>Solution.lean</code>	Re-exports matching kernel-checked declarations
<code>comparator.json</code>	Compared theorem/definition names and permitted axioms
<code>formalization.yaml</code>	Scope, source alignment, fidelity, and review metadata
<code>PROVENANCE.md</code>	Standalone status and relation to sibling Scott projects
<code>docs/PALOMAR_EDITORIAL_AUDIT.md</code>	Mechanical and editorial preflight discipline

The compared inventory is narrower than the entire library only in the sense that supplementary lemmas are reached through the published capstones rather than all being named independently. `Solution.lean` and every file below `Scott1964/` must remain sorry-free.

9 Build and preflight

The repository pins Lean and mathlib **v4.33.0**.

```
lake exe cache get
lake build
bash scripts/palomar_preflight.sh --mechanical-only # CI / routine
bash scripts/palomar_preflight.sh # before Palomar submission
bash scripts/generate_arxiv_with_code.sh # -> arxiv_with_code.md
```

`lake build` checks the `Scott1964`, `Challenge`, and `Solution` targets. Mechanical preflight validates packaging, builds the project, compares Challenge/Solution declaration types and closure values, runs Palomar’s pinned Comparator, scans completed sources for proof holes, checks permitted axioms, and checks patch formatting. Full preflight adds policy synchronization and the editorial audit.

`arxiv_with_code.md` is a generated review artifact: this narrative followed by the source appendix configured in `scripts/generate_arxiv_with_code.py`. It is gitignored and should be regenerated whenever `arxiv.md` or a listed source file changes.

10 License and source PDF

Original Lean code and author-written documentation are Apache-2.0. `sources/ScottMeasurement1964.pdf` and its transcription are not Apache-2.0; see NOTICE and `sources/README.md` for the copyright

carve-out.

- [Cur26] Anysphere, Inc. *Cursor: AI-native code editor and agent environment*. <https://cursor.com> (accessed 2026).
- [Cmp25] Anysphere, Inc. *Composer 2.5*. Model announcement and documentation, <https://cursor.com/blog/composer-2-5>; model card as integrated in Cursor, <https://cursor.com/docs/models> (accessed 2026).
- [Son26] Anthropic. *Claude Sonnet 5* (medium reasoning variant). System card, <https://www.anthropic.com/claude-sonnet-5-system-card>; model documentation as integrated in Cursor, <https://cursor.com/docs/models> (accessed 2026).
- [Ant26] Anthropic. *Claude Opus 4.8* (high thinking/reasoning variant). System card and announcement, <https://www.anthropic.com/news/claude-opus-4-8>; model documentation as integrated in Cursor, <https://cursor.com/docs/models/claude-opus-4-8> (accessed 2026).

A Complete Lean source

Role	File
Root import graph	Scott1964.lean
Stable distinguished sequence index	Scott1964/MeasurementStructures/FinHead.lean
Scott’s finite inequality predicates	Scott1964/MeasurementStructures/LinearInequalities/
Finite convex separation	Scott1964/MeasurementStructures/LinearInequalities/
Rational coefficient reduction	Scott1964/MeasurementStructures/LinearInequalities/
Explicit finite sequence conditions	Scott1964/MeasurementStructures/LinearInequalities/
Theorems 1.1–1.4	Scott1964/MeasurementStructures/LinearInequalities/
Ordered-group consequences and obstruction	Scott1964/MeasurementStructures/LinearInequalities/
Finite Scott–Suppes staircase representation	Scott1964/MeasurementStructures/Preference/Direct.1
Local cycle reductions	Scott1964/MeasurementStructures/Preference/Cycle.1
Theorem 2.1	Scott1964/MeasurementStructures/Preference/Intransi
Theorem 3.1	Scott1964/MeasurementStructures/Differences/Pair.1
Theorem 3.2	Scott1964/MeasurementStructures/Differences/Ordered
Finite qualitative probability definitions	Scott1964/MeasurementStructures/Probability/Basic.1
Atom-vector representation	Scott1964/MeasurementStructures/Probability/Atoms.1
Theorem 4.1 and signed charges	Scott1964/MeasurementStructures/Probability/Finite.
Kraft–Pratt–Seidenberg counterexample	Scott1964/MeasurementStructures/Probability/KPSCoun
Universal event space	Scott1964/MeasurementStructures/Probability/Infini
Closed-cone separation	Scott1964/MeasurementStructures/Probability/Infini
Generalized Kelley cover	Scott1964/MeasurementStructures/Probability/Infini
Modern infinite reconstruction	Scott1964/MeasurementStructures/Probability/Infini
Complete library re-export	Scott1964/MeasurementStructures/Basic.lean

Primary source (PDF): [sources/ScottMeasurement1964.pdf](#) — Dana S. Scott, *Measurement Structures and Linear Inequalities* (J. Math. Psychology 1, 1964).

Files appear in `Scott1964.lean` import order. Each block is a verbatim copy of the repository file at generation time.

A.1 Scott1964.lean

8 lines.

Lean 4 source

```
/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
Github: https://github.com/catskillsresearch/scott1964
-/

import Scott1964.MeasurementStructures.Basic
```

A.2 Scott1964/MeasurementStructures/FinHead.lean

31 lines.

Lean 4 source

```
/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/

import Mathlib.Data.Fin.Basic

/-!
# Stable `Fin (n + 1)` head index

Compared Scott permutation/cancellation conditions mention the distinguished
index `0 : Fin (n + 1)`. Elaborating that literal attaches a generated
`.proof_N` to whichever declaration first needs `OfNat`. Palomar compares
those generated constants, so Challenge and Solution must share a named
proof of `0 < n + 1` instead.
-/

namespace Scott1964.MeasurementStructures

theorem fin_succ_pos (n : Nat) : 0 < n + 1 :=
  Nat.succ_pos n

/-- The distinguished index in a nonempty Scott sequence of length `n + 1`. -/
def finHead (n : Nat) : Fin (n + 1) :=
  <0, fin_succ_pos n>

theorem finHead_eq_zero (n : Nat) : finHead n = 0 :=
  Fin.ext rfl

end Scott1964.MeasurementStructures
```

A.3 Scott1964/MeasurementStructures/LinearInequalities/Definitions.lean

122 lines.

Lean 4 source

```
/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
```

Released under Apache 2.0 license as described in the file LICENSE.

Authors: Lars Warren Ericson.

-/

```
import Mathlib.Analysis.Convex.Topology
import Mathlib.LinearAlgebra.FiniteDimensional.Basic
```

/-!

Scott's finite systems of linear inequalities

Definitions corresponding to S1 of Scott (1964), pp. 233-237.

-/

open Set

namespace Scott1964.MeasurementStructures.LinearInequalities

variable {L : Type*} [AddCommGroup L] [Module ? L]

/-- A set is symmetric when it is closed under negation. -/

def Symmetric (X : Set L) : Prop := forall ?x?, x in X -> -x in X

/-- `N` is realized on `X` by a real linear functional. -/

def Realizable (X N : Set L) : Prop :=
 exists phi : Module.Dual ? L, forall x in X, x in N <-> 0 <= phi x

/-- Scott's notation `x ? 0` : positive, but its negative is not positive. -/

def strictPositive (X N : Set L) : Set L :=
 {x | x in X /\ x in N /\ -x notin N}

/-- Vectors declared both nonnegative and nonpositive. -/

def indifferent (X N : Set L) : Set L :=
 {x | x in X /\ x in N /\ -x in N}

/-- Condition (1): every vector has one of the two weak signs. -/

def SignComplete (X N : Set L) : Prop :=
 forall ?x?, x in X -> x in N \/ -x in N

/-- Geometric form of Scott's condition (2).

No convex combination of strictly positive vectors belongs to the linear span of vectors carrying both weak signs. For finite symmetric systems this is equivalent to Scott's positive-coefficient cancellation condition.

-/

def WeightedCancellation (X N : Set L) : Prop :=
 Disjoint (convexHull ? (strictPositive X N))
 (Submodule.span ? (indifferent X N) : Set L)

/-- Scott's literal positive-weight finite-sequence condition (2).

Sequences are indexed by `Fin (n + 1)`, making nonemptiness explicit. -/

def WeightedSequenceCancellation (X N : Set L) : Prop :=
 forall (n : Nat) (x : Fin (n + 1) -> L) (c : Fin (n + 1) -> ?),
 (forall i, x i in X) -> (forall i, x i in N) -> (forall i, 0 < c i) ->
 ? i, c i * x i = 0 -> forall i, -x i in N

/-- Scott's literal unweighted finite-sequence condition (4). -/

def UnweightedSequenceCancellation (X N : Set L) : Prop :=
 forall (n : Nat) (x : Fin (n + 1) -> L),
 (forall i, x i in X) -> (forall i, x i in N) ->
 ? i, x i = 0 -> forall i, -x i in N

/-- Positive natural-multiplicity version, intermediate between rational weights and literal repetition. -/

```

def NatWeightedSequenceCancellation (X N : Set L) : Prop :=
  forall (n : Nat) (x : Fin (n + 1) -> L) (k : Fin (n + 1) -> Nat),
    (forall i, x i in X) -> (forall i, x i in N) -> (forall i, 0 < k i) ->
      ? i, k i * x i = 0 -> forall i, -x i in N

/-- A vector in `S -> ?` has rational coordinates. -/
def IsRationalVector {S : Type*} (x : S -> ?) : Prop :=
  forall s, exists q : ?, x s = q

/-- A set consists of rational vectors. -/
def IsRationalSet {S : Type*} (X : Set (S -> ?)) : Prop :=
  forall ?x?, x in X -> IsRationalVector x

/-- Realizability of a relation by comparison of functional values. -/
def RelationRealizable (Y : Set L) (R : L -> L -> Prop) : Prop :=
  exists phi : Module.Dual ? L, forall x in Y, forall y in Y, R x y <-> phi y <= phi
    x

/-- Condition (5): completeness on `Y`. -/
def RelationComplete (Y : Set L) (R : L -> L -> Prop) : Prop :=
  forall ?x?, x in Y -> forall ?y?, y in Y -> R x y \ / R y x

/-- Strictly positive differences associated to a relation. -/
def strictDifferences (Y : Set L) (R : L -> L -> Prop) : Set L :=
  {z | exists x in Y, exists y in Y, R x y /\ not R y x /\ z = x - y}

/-- Indifferent differences associated to a relation. -/
def indifferentDifferences (Y : Set L) (R : L -> L -> Prop) : Set L :=
  {z | exists x in Y, exists y in Y, R x y /\ R y x /\ z = x - y}

/-- Geometric form of Scott's equal-sums cancellation condition (6). -/
def RelationCancellation (Y : Set L) (R : L -> L -> Prop) : Prop :=
  Disjoint (convexHull ? (strictDifferences Y R))
    (Submodule.span ? (indifferentDifferences Y R) : Set L)

/-- Scott's literal paired equal-sums condition (6). -/
def RelationSequenceCancellation (Y : Set L) (R : L -> L -> Prop) : Prop :=
  forall (n : Nat) (x y : Fin (n + 1) -> L),
    (forall i, x i in Y) -> (forall i, y i in Y) -> (forall i, R (x i) (y i)) ->
      ? i, x i = ? i, y i -> forall i, R (y i) (x i)

/-- The additive closure `Y^+` (including the empty sum). -/
def additiveClosure (Y : Set L) : Set L :=
  AddSubmonoid.closure Y

/-- Scott's three axioms (i)-(iii) for a strictly monotonic relation. -/
structure StrictlyMonotonic (Z : Set L) (R : L -> L -> Prop) : Prop where
  complete : forall ?x?, x in Z -> forall ?y?, y in Z -> R x y \ / R y x
  add : forall ?x_0 y_0 x_1 y_1?, x_0 in Z -> y_0 in Z -> x_1 in Z -> y_1 in Z
    ->
    R x_0 y_0 -> R x_1 y_1 -> R (x_0 + x_1) (y_0 + y_1)
  cancel : forall ?x_0 y_0 x_1 y_1?, x_0 in Z -> y_0 in Z -> x_1 in Z -> y_1 in
    Z ->
    x_0 + x_1 = y_0 + y_1 -> R x_1 y_1 -> R y_0 x_0

/-- `Rplus` extends `R` from `Y` to `Z`. -/
def ExtendsOn (Y Z : Set L) (R Rplus : L -> L -> Prop) : Prop :=
  Y subteq Z /\ forall ?x?, x in Y -> forall ?y?, y in Y -> (Rplus x y <-> R
    x y)

end Scott1964.MeasurementStructures.LinearInequalities

```

A.4 Scott1964/MeasurementStructures/LinearInequalities/Separation.lean

67 lines.

Lean 4 source

```
/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/

import Scott1964.MeasurementStructures.LinearInequalities.Definitions
import Mathlib.Analysis.LocallyConvex.Separation
import Mathlib.Analysis.LocallyConvex.WithSeminorms

/#!
# Finite convex separation

The separation lemma used in Scott's proof of Theorem 1.1.
-/

open Set

namespace Scott1964.MeasurementStructures.LinearInequalities

variable {L : Type*} [NormedAddCommGroup L] [NormedSpace ? L]
[FiniteDimensional ? L]

/-- A finite set `A` can be made strictly positive while `B` is made zero
exactly when its convex hull misses the span of `B`. -/
theorem finite_strict_separation {A B : Set L} (hA : A.Finite) :
  Disjoint (convexHull ? A) (Submodule.span ? B : Set L) <=>
    exists phi : Module.Dual ? L, (forall x in A, 0 < phi x) /\ forall x in B, phi x
    = 0 := by
  constructor
  * intro hdisj
  let M : Submodule ? L := Submodule.span ? B
  have hMclosed : IsClosed (M : Set L) := M.closed_of_finiteDimensional
  obtain <f, u, v, hfA, huv, hfM> :=
    geometric_hahn_banach_compact_closed (convex_convexHull ? A)
    (hA.isCompact_convexHull ?) M.convex hMclosed hdisj
  have hf_zero : forall m in M, f m = 0 := by
    intro m hm
    by_contra hne
    have hscaled := hfM (((v - 1) / f m) * m) (M.smul_mem _ hm)
    have hmap : f (((v - 1) / f m) * m) = v - 1 := by
      rw [map_smul, smul_eq_mul]
    field_simp
    rw [hmap] at hscaled
    linarith
  let phi : Module.Dual ? L := -(f : L -> L[?] ?).toLinearMap
  refine <phi, ?_, ?_>
  * intro x hx
  have hxHull : x in convexHull ? A := subset_convexHull ? A hx
  have hv : v < 0 := by simpa using hfM 0 M.zero_mem
  have hfx : f x < 0 := (hfA x hxHull).trans (huv.trans hv)
  simpa [phi] using neg_pos.mpr hfx
  * intro x hx
  have hxM : x in M := Submodule.subset_span hx
  simp [phi, hf_zero x hxM]
  * rintro <phi, hphiA, hphiB>
  rw [Set.disjoint_left]
  intro z hzA hzB
```

```

have hzpos : 0 < phi z := by
  exact convexHull_min (fun x hx => hphiA x hx)
    (convex_halfSpace_gt phi.isLinear 0) hzA
have hzM : phi z = 0 := by
  have hle : Submodule.span ? B <= LinearMap.ker phi :=
    Submodule.span_le.mpr fun x hx => LinearMap.mem_ker.mpr (hphiB x hx)
  exact LinearMap.mem_ker.mp (hle hzM)
linarith
end Scott1964.MeasurementStructures.LinearInequalities

```

A.5 Scott1964/MeasurementStructures/LinearInequalities/Rationalization.lean

243 lines.

Lean 4 source

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/

import Scott1964.MeasurementStructures.LinearInequalities.Definitions
import Mathlib.Algebra.Algebra.Rat
import Mathlib.LinearAlgebra.TensorProduct.Finiteness
import Mathlib.LinearAlgebra.TensorProduct.Pi
import Mathlib.RingTheory.Flat.Basic
import Mathlib.Topology.Algebra.Order.Archimedean
import Mathlib.Topology.NhdsWithin

/-!
# Rational vectors

Elementary closure facts used in Scott's reduction from relations to
inequalities on the rational difference set `Y - Y`.
-/

namespace Scott1964.MeasurementStructures.LinearInequalities

variable {S : Type*}

open scoped TensorProduct

theorem isRationalVector_zero : IsRationalVector (0 : S -> ?) := by
  intro s
  exact <0, by simp>

theorem IsRationalVector.neg {x : S -> ?} (hx : IsRationalVector x) :
  IsRationalVector (-x) := by
  intro s
  obtain <q, hq> := hx s
  exact <-q, by simp [hq]>

theorem IsRationalVector.sub {x y : S -> ?}
  (hx : IsRationalVector x) (hy : IsRationalVector y) :
  IsRationalVector (x - y) := by
  intro s
  obtain <q, hq> := hx s
  obtain <r, hr> := hy s
  exact <q - r, by simp [hq, hr]>

```

```

theorem rational_difference_set {Y : Set (S -> ?)} (hY : IsRationalSet Y) :
  IsRationalSet {z | exists x in Y, exists y in Y, z = x - y} := by
  rintro z <x, hx, y, hy, rfl>
  exact (hY hx).sub (hY hy)

section PositiveKernel

variable {I : Type*} [Fintype I] [DecidableEq I]
[Fintype S] [DecidableEq S]

/-- A strictly positive real relation between finitely many rational vectors
can be replaced by a strictly positive rational relation.

This is the scalar-extension step in Scott's proof of Theorem 1.2. Exactness
of tensoring the rational kernel with ``?`` writes the given real relation as a
finite real linear combination of rational kernel vectors. Density of a
finite product of copies of ``?`` then preserves all strict coordinate
inequalities. -/
theorem exists_pos_rational_relation (x : I -> S -> ?)
  (hx : forall i, IsRationalVector (x i)) (c : I -> ?)
  (hc : forall i, 0 < c i) (hsum : ? i, c i * x i = 0) :
  exists q : I -> ?, (forall i, 0 < q i) /\ ? i, (q i : ?) * x i = 0 := by
  classical
  choose a ha using fun i s |> hx i s
  let f : (I -> ?) -> ?[?] (S -> ?) :=
    { toFun := fun d s |> ? i, d i * a i s
      map_add' := by
        intro d e
        ext s
        simp only [Pi.add_apply, add_mul, Finset.sum_add_distrib]
      map_smul' := by
        intro r d
        ext s
        simp only [Pi.smul_apply, smul_eq_mul, RingHom.id_apply, mul_assoc, Finset.mul_sum] }
  let eI := TensorProduct.piScalarRight ? ? ? I
  let eS := TensorProduct.piScalarRight ? ? ? S
  have hc_repr : eI.symm c = ? i, c i ??[?] Pi.single i 1 := by
    apply eI.injective
  ext i
  simp [eI, Pi.single_apply]
  have hbase : f.baseChange ? (eI.symm c) = 0 := by
    rw [hc_repr]
    apply eS.injective
  ext s
  have hs := congrFun hsum s
  simp [eS, f, Pi.single_apply, ha, Algebra.smul_def, smul_eq_mul, mul_comm] using hs
  have hexact :=
    Module.Flat.lTensor_exact ? (LinearMap.exact_subtype_ker_map f)
  rw [ <- LinearMap.baseChange_eq_ltensor ] at hexact
  obtain <t, ht> := (hexact (eI.symm c)).mp hbase
  obtain <k, r, v, rfl> := TensorProduct.exists_sum_tmul_eq t
  let U : Set (Fin k -> ?) :=
    {d | forall i, 0 < ? j, d j * ((v j : I -> ?) i : ?)}
  have hrU : r in U := by
    intro i
    have htc := congrArg eI ht
    have hi := congrFun htc i
    have hi' : ? j, r j * ((v j : I -> ?) i : ?) = c i := by
      simp [eI, Algebra.smul_def, smul_eq_mul, mul_comm] using hi
    rw [hi']
    exact hc i
  have hUopen : IsOpen U := by
    rw [show U = ? i, {d | (0 : ?) < ? j, d j * ((v j : I -> ?) i : ?)} by

```

```

    ext d
    simp [U]]
  apply isOpen_iInter_of_finite
  intro i
  apply isOpen_lt continuous_const
  fun_prop
  have hdense : DenseRange (Pi.map fun _ : Fin k |-> (( : ? -> ?)) :=
    DenseRange.piMap fun _ |-> Rat.denseRange_cast
  obtain <q, hqU> := hdense.exists_mem_open hUopen <r, hrU>
  let w : I -> ? := fun i |-> ? j, q j * (v j : I -> ?) i
  refine <w, ?_, ?_>
  * intro i
    have hi : (0 : ?) < ? j, (q j : ?) * ((v j : I -> ?) i : ?) := by
      simpa using hqU i
    have hcast : (w i : ?) = ? j, (q j : ?) * ((v j : I -> ?) i : ?) := by
      simp [w]
    rw [← hcast] at hi
    exact_mod_cast hi
  * have hv : forall j, f (v j : I -> ?) = 0 :=
    fun j |-> LinearMap.mem_ker.mp (v j).property
  ext s
  have hwzero : ? i, w i * a i s = 0 := by
    simp_rw [w, Finset.sum_mul]
    rw [Finset.sum_comm, Finset.sum_eq_zero]
    intro j hj
    have hfj := congrFun (hv j) s
    change (? i, (v j : I -> ?) i * a i s) = 0 at hfj
    calc
      ? i, q j * (v j : I -> ?) i * a i s =
        q j * ? i, (v j : I -> ?) i * a i s := by
          rw [Finset.mul_sum]
          apply Finset.sum_congr rfl
          intro i hi
          ring
        _ = 0 := by rw [hfj, mul_zero]
  have hwzeroR := congrArg (( : ? -> ?) hwzero
  simpa only [Finset.sum_apply, Pi.smul_apply, smul_eq_mul, Pi.zero_apply,
    Rat.cast_sum, Rat.cast_mul, Rat.cast_zero, ha] using hwzeroR

end PositiveKernel

section Repetition

variable {L : Type*} [AddCommGroup L] [Module ? L]

/-- Clearing to positive natural coefficients can be discharged by literal
repetition of each vector. -/
theorem UnweightedSequenceCancellation.natWeighted {X N : Set L}
  (h : UnweightedSequenceCancellation X N) :
  NatWeightedSequenceCancellation X N := by
  intro n x k hx hN hk hsum
  let I := Sigma i : Fin (n + 1), Fin (k i)
  let i0 : I := <0, <0, hk 0>>
  have hI : 0 < Fintype.card I := Fintype.card_pos_iff.mpr <i0>
  let m := Fintype.card I - 1
  have hcard : Fintype.card I = m + 1 := by
    dsimp [m]
    omega
  let e : Fin (m + 1) ? I :=
    Fintype.equivOfCardEq (by simpa using hcard.symm)
  let z : Fin (m + 1) -> L := fun j |-> x (e j).1
  have hzsum : ? j, z j = 0 := by
    rw [← hsum]

```

```

change ? j, x (e j).1 = ? i, k i * x i
calc
  ? j, x (e j).1 = ? a : I, x a.1 := e.sum_comp (fun a |-> x a.1)
  _ = ? i, ? _j : Fin (k i), x i := Fintype.sum_sigma (fun a : I |-> x a.1)
  _ = ? i, k i * x i := by simp
have hz := h m z (fun j |-> hx (e j).1) (fun j |-> hN (e j).1) hzsum
intro i
let a : I := <i, <0, hk i>>
simp [z, a] using hz (e.symm a)

end Repetition

section RationalRepetition

variable {S : Type*} [Fintype S]

/-- On rational coordinate vectors, Scott's unit-weight cancellation
condition implies his arbitrary positive-real-weight condition. -/
theorem UnweightedSequenceCancellation.rationalWeighted
  {X N : Set (S -> ?)} (h : UnweightedSequenceCancellation X N)
  (hX : IsRationalSet X) : WeightedSequenceCancellation X N := by
intro n x c hx hN hc hsum
classical
obtain <q, hq, hqsum> :=
  exists_pos_rational_relation x (fun i |-> hX (hx i)) c hc hsum
let D : Nat := ? i, (q i).den
have hden : forall i, (q i).den ? D := by
  intro i
  exact Finset.dvd_prod_of_mem (fun j |-> (q j).den) (Finset.mem_univ i)
choose d hd using hden
let k : Fin (n + 1) -> Nat := fun i |-> (q i).num.natAbs * d i
have hnum : forall i, 0 < (q i).num := fun i |-> Rat.num_pos.mpr (hq i)
have hk : forall i, 0 < k i := by
  intro i
  have hD : 0 < D := Finset.prod_pos fun i _ |-> (q i).den_pos
  have hdpos : 0 < d i := by
    have := hd i
    nlinarith [(q i).den_pos]
  exact Nat.mul_pos (Int.natAbs_pos.mpr (hnum i).ne') hdpos
have hkq : forall i, (k i : ?) = (D : ?) * q i := by
  intro i
  have hnumcast : ((q i).num.natAbs : Int) = (q i).num :=
    Int.natAbs_of_nonneg (hnum i).le
  rw [← (q i).num_div_den]
  have hnumq : (0 : ?) < (q i).num := by exact_mod_cast hnum i
  norm_num [k, hd i, hnumcast, abs_of_pos hnumq]
  field_simp
have hksum : ? i, k i * x i = 0 := by
  calc
    ? i, k i * x i = ? i, (k i : ?) * x i := by
      apply Finset.sum_congr rfl
      intro i hi
      exact (Nat.cast_smul_eq_nsmul ? (k i) (x i)).symm
    _ = ? i, ((D : ?) * q i : ?) * x i := by
      apply Finset.sum_congr rfl
      intro i hi
      rw [← hkq i]
      rfl
    _ = (D : ?) * ? i, (q i : ?) * x i := by
      ext s
      simp only [Finset.sum_apply, Pi.smul_apply, smul_eq_mul]
      rw [Finset.mul_sum]
      apply Finset.sum_congr rfl

```

```

      intro i hi
      simp [Algebra.smul_def]
      ring
      _ = 0 := by rw [hqsum, smul_zero]
    exact h.natWeighted n x k hx hN hk hksum

end RationalRepetition

end Scott1964.MeasurementStructures.LinearInequalities

```

A.6 Scott1964/MeasurementStructures/LinearInequalities/Sequences.lean

63 lines.

Lean 4 source

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/

import Scott1964.MeasurementStructures.LinearInequalities.Definitions

/-!
# Scott's explicit finite sequence conditions
-/

open scoped BigOperators

namespace Scott1964.MeasurementStructures.LinearInequalities

variable {L : Type*} [AddCommGroup L] [Module ? L]

/-- A realizing functional satisfies Scott's positive-weight condition (2). -/
theorem Realizable.weightedSequenceCancellation {X N : Set L}
  (hreal : Realizable X N) (hsym : Symmetric X) :
  WeightedSequenceCancellation X N := by
  obtain <phi, hphi> := hreal
  intro n x c hx hN hc hsum
  have hnonneg : forall i, 0 <= c i * phi (x i) :=
    fun i |> mul_nonneg (hc i).le ((hphi (x i) (hx i)).mp (hN i))
  have hzero : ? i, c i * phi (x i) = 0 := by
    have := congrArg phi hsum
    simpa only [map_sum, map_smul, smul_eq_mul, map_zero] using this
  intro j
  have hxzero : phi (x j) = 0 := by
    have hterm : c j * phi (x j) = 0 :=
      (Finset.sum_eq_zero_iff_of_nonneg fun i _ |> hnonneg i).mp hzero j (Finset.mem_univ j)
    exact (mul_eq_zero.mp hterm).resolve_left (hc j).ne'
  apply (hphi (-x j) (hsym (hx j))).mpr
  simp [hxzero]

/-- Condition (2) immediately implies the unit-weight condition (4). -/
theorem WeightedSequenceCancellation.unweighted {X N : Set L}
  (h : WeightedSequenceCancellation X N) :
  UnweightedSequenceCancellation X N := by
  intro n x hx hN hsum
  apply h n x (fun _ |> 1) hx hN (fun _ |> zero_lt_one)
  simpa using hsum

/-- A realizing relation satisfies Scott's paired equal-sums condition (6). -/

```

```

theorem RelationRealizable.sequenceCancellation {Y : Set L} {R : L -> L -> Prop}
  (hreal : RelationRealizable Y R) : RelationSequenceCancellation Y R := by
  obtain <phi, hphi> := hreal
  intro n x y hx hy hR hsum
  have hle : forall i, phi (y i) <= phi (x i) :=
    fun i |> (hphi (x i) (hx i) (y i) (hy i)).mp (hR i)
  have hsumphi : ? i, phi (x i) = ? i, phi (y i) := by
    simpa only [map_sum] using congrArg phi hsum
  intro j
  have hhead : phi (x j) <= phi (y j) := by
    have hall :=
      (Finset.sum_eq_sum_iff_of_le (s := Finset.univ)
        (fun i _ |> hle i)).mp hsumphi.symm
    exact (hall j (Finset.mem_univ j)).ge
  exact (hphi (y j) (hy j) (x j) (hx j)).mpr hhead
end Scott1964.MeasurementStructures.LinearInequalities

```

A.7 Scott1964/MeasurementStructures/LinearInequalities/ScottTheorems.lean

402 lines.

Lean 4 source (lines 1–400)

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/

import Scott1964.MeasurementStructures.LinearInequalities.Separation
import Scott1964.MeasurementStructures.LinearInequalities.Rationalization
import Scott1964.MeasurementStructures.LinearInequalities.Sequences

/-!
# Scott 1964, Theorems 1.1–1.4

Finite convex-separation forms of the general method in S1.
-/

open Set

namespace Scott1964.MeasurementStructures.LinearInequalities

variable {L : Type*} [NormedAddCommGroup L] [NormedSpace ? L]
  [FiniteDimensional ? L]

/-- The sequence formulation may be used with any nonempty finite index type. -/
theorem WeightedSequenceCancellation.fintype {X N : Set L}
  (h : WeightedSequenceCancellation X N) {I : Type*} [Fintype I] [Nonempty I]
  (x : I -> L) (c : I -> ?) (hx : forall i, x i in X)
  (hN : forall i, x i in N) (hc : forall i, 0 < c i)
  (hsum : ? i, c i * x i = 0) : forall i, -x i in N := by
  let n := Fintype.card I - 1
  have hcard : Fintype.card I = n + 1 := by
    dsimp [n]
    have := Fintype.card_pos (a := I)
    omega
  let e : Fin (n + 1) ? I :=
    Fintype.equivOfCardEq (by simpa using hcard.symm)
  have he := h n (x comp e) (c comp e) (fun i |> hx (e i))
  (fun i |> hN (e i)) (fun i |> hc (e i))
  (by

```

```

    rw [ <- hsum]
    exact e.sum_comp (fun i |-> c i * x i))
intro i
simpa using he (e.symm i)

/-- Under sign completeness, Scott's positive-weight sequence condition is
equivalent to the geometric cancellation condition. -/
theorem weightedCancellation_of_sequence {X N : Set L}
  (hsym : Symmetric X) (hcomplete : SignComplete X N)
  (hseq : WeightedSequenceCancellation X N) :
  WeightedCancellation X N := by
  rw [WeightedCancellation, Set.disjoint_left]
  intro z hzconv hzspan
  obtain <?, inst?, w, a, hw, hwone, ha, hwa> :=
    mem_convexHull_iff_exists_fintype.mp hzconv
  obtain <d, t, ht, hdsupp, hdt> :=
    Submodule.mem_span_iff_exists_finset_subset.mp hzspan
  let I_1 := {i : ? // w i != 0}
  let I_2 := {y : t // d y != 0}
  let I := I_1 ? I_2
  let v : I -> L
  | Sum.inl i => a i
  | Sum.inr y => if 0 < d y.1.1 then -y.1.1 else y.1.1
  let c : I -> ?
  | Sum.inl i => w i
  | Sum.inr y => |d y.1.1|
  have hI : Nonempty I := by
    have hwne : exists i, w i != 0 := by
      by_contra h
      push_neg at h
      simp [h] at hwone
    exact <Sum.inl <hwne.choose, hwne.choose_spec>>
  letI : Nonempty I := hI
  have hvX : forall i, v i in X := by
    rintro (i | y)
    * exact (ha i).1
    * rcases ht y.1.2 with <hyX, hyN, hnyN>
      dsimp [v]
      split_ifs
      * exact hsym hyX
      * exact hyX
  have hvN : forall i, v i in N := by
    rintro (i | y)
    * exact (ha i).2.1
    * rcases ht y.1.2 with <hyX, hyN, hnyN>
      dsimp [v]
      split_ifs
      * exact hnyN
      * exact hyN
  have hc : forall i, 0 < c i := by
    rintro (i | y)
    * exact lt_of_le_of_ne (hw i) i.property.symm
    * exact abs_pos.mpr y.property
  have hsum : ? i, c i * v i = 0 := by
    rw [Fintype.sum_sum_type]
    have hleft : ? i : I_1, c (.inl i) * v (.inl i) = z := by
      rw [ <- hwa]
      rw [show (? i : I_1, c (.inl i) * v (.inl i)) =
        (? i in Finset.univ.filter (fun i |-> w i != 0), w i * a i) by
        simpa [I_1, c, v] using
          (Finset.sum_subtype (Finset.univ.filter fun i |-> w i != 0)
            (by simp) (fun i |-> w i * a i)).symm]
      exact Finset.sum_filter_of_ne fun i hi hterm hwi |->

```

```

      hterm (by simp [hwi])
have hright : ? y : I_2, c (.inr y) * v (.inr y) = -z := by
  rw [ <- hdt]
have hsub :
  ? y : I_2, c (.inr y) * v (.inr y) =
    -? y in t, d y * y := by
  rw [ <- Finset.sum_neg_distrib]
  rw [show (? y : I_2, c (.inr y) * v (.inr y)) =
    (? y : {y : t // d y.1 != 0}, -(d y.1.1 * y.1.1)) by
    apply Finset.sum_congr rfl
    intro y hy
    dsimp [I_2, c, v]
    split_ifs with hdy
    * rw [abs_of_pos hdy, smul_neg]
    * have hdyneq : d y.1.1 < 0 := lt_of_le_of_ne (le_of_not_gt hdy) y.2
      rw [abs_of_neg hdyneq, neg_smul]]
  calc
    ? y : {y : t // d y.1 != 0}, -(d y.1.1 * y.1.1) =
      ? y in Finset.univ.filter (fun y : t |-> d y.1 != 0),
        -(d y.1 * y.1) := by
        exact (Finset.sum_subtype
          (Finset.univ.filter fun y : t |-> d y.1 != 0)
            (by simp) (fun y : t |-> -(d y.1 * y.1))).symm
    _ = ? y : t, -(d y.1 * y.1) := by
      exact Finset.sum_filter_of_ne fun y hy hterm hdy |->
        hterm (by simp [hdy])
    _ = ? y in t, -(d y * y) := by
      change (t.attach.sum fun y |-> -(d y.1 * y.1)) = _
      exact Finset.sum_attach t (fun y |-> -(d y * y))
  exact hsub
  rw [hleft, hright]
  exact add_neg_cancel z
have hall := hseq.fintype v c hvX hvN hc hsum
obtain <i, hi> : exists i, w i != 0 := by
  by_contra h
  push_neg at h
  simp [h] at hwone
have hnot := (ha i).2.2
exact hnot (by
  simp [v] using hall (Sum.inl (show I_1 from <i, hi>)))

/-- Scott (1964), Theorem 1.1. -/
theorem scott_theorem_1_1 {X N : Set L} (hX : X.Finite) (hsym : Symmetric X) :
  Realizable X N <-> SignComplete X N /\ WeightedSequenceCancellation X N := by
  constructor
  * rintro <phi, hphi>
    refine <?_, ?_>
    * intro x hx
      by_cases h : 0 <= phi x
      * exact Or.inl ((hphi x hx).mpr h)
      * right
        have hnx := hsym hx
        apply (hphi (-x) hnx).mpr
        simp using le_of_not_ge h
    * exact Realizable.weightedSequenceCancellation <phi, hphi> hsym
  * rintro <htotal, hseq>
    have hcancel := weightedCancellation_of_sequence hsym htotal hseq
    obtain <phi, hstrict, hneutral> :=
      (finite_strict_separation
        (hX.subset fun _ hx |-> hx.1)).mp hcancel
    refine <phi, fun x hx |-> ?_>
    constructor
    * intro hN

```

```

by_cases hnN : -x in N
* exact le_of_eq (hneutral x <hx, hN, hnN>).symm
* exact (hstrict x <hx, hN, hnN>).le
* intro hphi
rcases httotal hx with hN | hnN
* exact hN
* by_contra hxN
  have hneg := hstrict (-x) <hsym hx, hnN, by simp using hxN>
  simp only [map_neg] at hneg
  linarith

/-- Scott (1964), Theorem 1.2, for rational coordinate vectors.

Rationality is used to replace a positive real dependence by a positive
rational dependence, clear denominators, and reduce to repeated unweighted
summands.
-/
theorem scott_theorem_1_2 {S : Type*} [Fintype S] {X N : Set (S → ?)}
  (hX : X.Finite) (hrat : IsRationalSet X) (hsym : Symmetric X) :
  Realizable X N ↔ SignComplete X N /\ UnweightedSequenceCancellation X N := by
  constructor
* intro hreal
  have h := (scott_theorem_1_1 hX hsym).mp hreal
  exact <h.1, h.2.unweighted>
* rintro <hcomplete, hunweighted>
  apply (scott_theorem_1_1 hX hsym).mpr
  exact <hcomplete, hunweighted.rationalWeighted hrat>

/-- Geometric intermediate form used in the proof of Theorem 1.3. -/
theorem scott_theorem_1_3_geometric {Y : Set L} {R : L → L → Prop} (hY : Y.Finite) :
  RelationRealizable Y R ↔ RelationComplete Y R /\ RelationCancellation Y R := by
  constructor
* rintro <phi, hphi>
  refine <?_, ?_>
* intro x hx y hy
  exact le_total (phi y) (phi x) |>.imp (fun h |> (hphi x hx y hy).mpr h)
  (fun h |> (hphi y hy x hx).mpr h)
* have hstrictFinite : (strictDifferences Y R).Finite := by
  apply ((hY.prod hY).image fun p : L × L |> p.1 - p.2).subset
  rintro z <x, hx, y, hy, -, -, rfl>
  exact <<x, y>, <hx, hy>, rfl>
  apply (finite_strict_separation hstrictFinite).mpr
  refine <phi, ?_, ?_>
* rintro z <x, hx, y, hy, hxy, hyx, rfl>
  have hle := (hphi x hx y hy).mp hxy
  have hnle : not phi x <= phi y := by
    intro h
    exact hyx ((hphi y hy x hx).mpr h)
  simp only [map_sub]
  linarith
* rintro z <x, hx, y, hy, hxy, hyx, rfl>
  have h_1 := (hphi x hx y hy).mp hxy
  have h_2 := (hphi y hy x hx).mp hyx
  simp only [map_sub]
  linarith
* rintro <hcomplete, hcancel>
  have hstrictFinite : (strictDifferences Y R).Finite := by
    apply ((hY.prod hY).image fun p : L × L |> p.1 - p.2).subset
    rintro z <x, hx, y, hy, -, -, rfl>
    exact <<x, y>, <hx, hy>, rfl>
  obtain <phi, hstrict, hneutral> :=
    (finite_strict_separation hstrictFinite).mp hcancel
  refine <phi, fun x hx y hy |> ?_>

```

```

constructor
* intro hxy
  by_cases hxy : R y x
  * have hz := hneutral (x - y) <x, hx, y, hy, hxy, hyx, rfl>
    have heq : phi x = phi y := by
      simp only [map_sub] at hz
      linarith
    exact heq.ge
  * have hz := hstrict (x - y) <x, hx, y, hy, hxy, hyx, rfl>
    simp [map_sub, sub_pos] using hz.le
* intro hle
  rcases hcomplete hx hy with hxy | hyx
  * exact hxy
  * by_contra hnxy
    have hz := hstrict (y - x) <y, hy, x, hx, hyx, hnxy, rfl>
    simp only [map_sub, sub_pos] at hz
    linarith

/-- Scott (1964), Theorem 1.3, with the literal paired equal-sums
cancellation condition (6). -/
theorem scott_theorem_1_3 {S : Type*} [Fintype S]
  {Y : Set (S -> ?)} {R : (S -> ?) -> (S -> ?) -> Prop}
  (hY : Y.Finite) (hYrat : IsRationalSet Y) :
  RelationRealizable Y R <->
    RelationComplete Y R /\ RelationSequenceCancellation Y R := by
constructor
* intro hreal
  obtain <phi, hphi> := hreal
  refine <?, RelationRealizable.sequenceCancellation <phi, hphi>>
  intro x hx y hy
  exact le_total (phi y) (phi x) |>.imp
    (fun h |> (hphi x hx y hy).mpr h) (fun h |> (hphi y hy x hx).mpr h)
* rintro <hcomplete, hcancel>
  let X : Set (S -> ?) := {z | exists x in Y, exists y in Y, z = x - y}
  let N : Set (S -> ?) := {z | exists x in Y, exists y in Y, R x y /\ z = x - y}
  have hXfinite : X.Finite := by
    apply ((hY.prod hY).image fun p : (S -> ?) x (S -> ?) |> p.1 - p.2).subset
    rintro z <x, hx, y, hy, rfl>
    exact <(x, y), <hx, hy>, rfl>
  have hXrat : IsRationalSet X := rational_difference_set hYrat
  have hXsym : Symmetric X := by
    rintro z <x, hx, y, hy, rfl>
    exact <y, hy, x, hx, by simp [sub_eq_add_neg, add_comm]>
  have hsign : SignComplete X N := by
    rintro z <x, hx, y, hy, rfl>
    rcases hcomplete hx hy with hxy | hyx
    * left
      exact <x, hx, y, hy, hxy, rfl>
    * right
      exact <y, hy, x, hx, hyx, by simp [sub_eq_add_neg, add_comm]>
  have hunweighted : UnweightedSequenceCancellation X N := by
    intro n z hzX hzN hsum
    choose x hx y hy hR hxy using hzN
    have hsumeq : ? i, x i = ? i, y i := by
      have hzero : ? i, x i - ? i, y i = 0 := by
        rw [← Finset.sum_sub_distrib]
        simp only [hxy] using hsum
      exact sub_eq_zero.mpr hzero
    have hrev := hcancel n x y hx hy hR hsumeq
    intro i
    exact <y i, hy i, x i, hx i, hrev i, by
      rw [hxy i]
      simp [sub_eq_add_neg, add_comm]>

```

```

obtain <phi, hphi> :=
  (scott_theorem_1_2 hXfinite hXrat hXsym).mpr <hsign, hunweighted>
refine <phi, fun x hx y hy |-> ?_>
constructor
* intro hxy
  have hN : x - y in N := <x, hx, y, hy, hxy, rfl>
  have hnonneg := (hphi (x - y) <x, hx, y, hy, rfl>).mp hN
  simp [map_sub, sub_nonneg] using hnonneg
* intro hle
  have hnonneg : 0 <= phi (x - y) := by simp [map_sub, sub_nonneg] using hle
  obtain <x', hx', y', hy', hx'y', heq> :=
    (hphi (x - y) <x, hx, y, hy, rfl>).mpr hnonneg
  by_contra hnxy
  have hyx := (hcomplete hx hy).resolve_left hnxy
  let xs : Fin 2 -> S -> ? := ![x', y]
  let ys : Fin 2 -> S -> ? := ![y', x]
  have hsum2 : ? i, xs i = ? i, ys i := by
    rw [Fin.sum_univ_two, Fin.sum_univ_two]
    dsimp [xs, ys]
  ext s
  have hs := congrFun heq s
  dsimp at hs |-
  linarith
  have hback := hcanceled 1 xs ys (by simp [xs, hx', hy])
    (by simp [ys, hy', hx]) (by
      intro i
      fin_cases i <=> simp [xs, ys, hx'y', hyx]) hsum2
  exact hnxy (by simp [xs, ys] using hback (1 : Fin 2))

/-- A realizing functional supplies Scott's strictly monotonic extension to
the additive closure. This is the forward half of Theorem 1.4. -/
theorem scott_theorem_1_4_forward {Y : Set L} {R : L -> L -> Prop}
  (hreal : RelationRealizable Y R) :
  exists Rplus : L -> L -> Prop,
    ExtendsOn Y (additiveClosure Y) R Rplus /\
    StrictlyMonotonic (additiveClosure Y) Rplus := by
obtain <phi, hphi> := hreal
let Rplus : L -> L -> Prop := fun x y |-> phi y <= phi x
refine <Rplus, <AddSubmonoid.subset_closure, ?_>, ?_>
* intro x hx y hy
  exact (hphi x hx y hy).symm
* refine <?_, ?_, ?_>
* intro x hx y hy
  exact le_total (phi y) (phi x)
* intro x_0 y_0 x_1 y_1 hx_0 hy_0 hx_1 hy_1 h_0 h_1
  dsimp [Rplus] at h_0 h_1 |-
  simp only [map_add]
  linarith
* intro x_0 y_0 x_1 y_1 hx_0 hy_0 hx_1 hy_1 heq h_1
  dsimp [Rplus] at h_1 |-
  have hsum : phi x_0 + phi x_1 = phi y_0 + phi y_1 := by
    simp only [map_add] using congrArg phi heq
  linarith

/-- A strictly monotonic extension implies Scott's literal condition (6). -/
theorem StrictlyMonotonic.relationSequenceCancellation
  {Y : Set L} {R Rplus : L -> L -> Prop}
  (hext : ExtendsOn Y (additiveClosure Y) R Rplus)
  (hmono : StrictlyMonotonic (additiveClosure Y) Rplus) :
  RelationSequenceCancellation Y R := by
intro n x y hx hy hR hsum
have hsumRel :
  forall s : Finset (Fin (n + 1)),

```

```

      Rplus (? i in s, x i) (? i in s, y i) := by
intro s
classical
induction s using Finset.induction_on with
| empty =>
  simp using (hmono.complete
    (show (0 : L) in additiveClosure Y from AddSubmonoid.zero_mem _)
    (show (0 : L) in additiveClosure Y from AddSubmonoid.zero_mem _)).elim id id
| @insert i s hi ih =>
  rw [Finset.sum_insert hi, Finset.sum_insert hi]
  apply hmono.add (hext.1 (hx i)) (hext.1 (hy i))
  (AddSubmonoid.sum_mem _ fun j hj |-> hext.1 (hx j))
  (AddSubmonoid.sum_mem _ fun j hj |-> hext.1 (hy j))
  ((hext.2 (hx i) (hy i)).mpr (hR i)) ih
intro j
let t : Finset (Fin (n + 1)) := Finset.univ.erase j
have htail := hsumRel t
apply (hext.2 (hy j) (hx j)).mp
apply hmono.cancel (hext.1 (hx j)) (hext.1 (hy j))
  (AddSubmonoid.sum_mem _ fun i hi |-> hext.1 (hx i))
  (AddSubmonoid.sum_mem _ fun i hi |-> hext.1 (hy i))
  ?_ htail
have hxsplit : x j + ? i in t, x i = ? i, x i := by
  rw [add_comm, <- Finset.sum_erase_add _ _ (Finset.mem_univ j)]
have hysplit : y j + ? i in t, y i = ? i, y i := by
  rw [add_comm, <- Finset.sum_erase_add _ _ (Finset.mem_univ j)]
rw [hxsplit, hysplit, hsum]

/-- Scott (1964), Theorem 1.4: realizability is equivalent to extendability
to a strictly monotonic relation on the additive closure. -/
theorem scott_theorem_1_4 {S : Type*} [Fintype S]
  {Y : Set (S -> ?)} {R : (S -> ?) -> (S -> ?) -> Prop}
  (hY : Y.Finite) (hYrat : IsRationalSet Y) :
  RelationRealizable Y R <->
    exists Rplus : (S -> ?) -> (S -> ?) -> Prop,
      ExtendsOn Y (additiveClosure Y) R Rplus /\
      StrictlyMonotonic (additiveClosure Y) Rplus := by
  constructor
* intro h
  exact scott_theorem_1_4_forward h
* rintro <Rplus, hext, hmono>
  apply (scott_theorem_1_3 hY hYrat).mpr
  refine <?_, hmono.relationSequenceCancellation hext>
  intro x hx y hy
  exact (hmono.complete (hext.1 hx) (hext.1 hy)).imp
    (fun h |-> hext.2 hx hy |>.mp h) (fun h |-> hext.2 hy hx |>.mp h)

```

Lean 4 source (lines 401–402)

end Scott1964.MeasurementStructures.LinearInequalities

A.8 Scott1964/MeasurementStructures/LinearInequalities/OrderedGroup.lean

309 lines.

Lean 4 source

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/

```

```

import Scott1964.MeasurementStructures.LinearInequalities.ScottTheorems
import Mathlib.Algebra.Order.Monoid.Lex

/-!
# Ordered groups after Scott's Theorem 1.4

The first result makes precise Scott's observation that every finite part of
a linearly ordered abelian group has a real-valued model. Pair-sums are put
into the finite system, so the model preserves every addition equation visible
inside that finite part.

The second group of results records the standard lexicographic obstruction:
each finite subsystem is real-valued, but the whole ordered monoid is not.
-/

open Set

namespace Scott1964.MeasurementStructures.LinearInequalities

section Local

variable {G : Type*} [AddCommGroup G] [LinearOrder G] [IsOrderedAddMonoid G]

private def localBasis {S : Set G} (x : S) : S → ? :=
  Pi.single x 1

private def localPair {S : Set G} (p : S × S) : S → ? :=
  localBasis p.1 + localBasis p.2

private def localTests (S : Set G) : Set (S → ?) :=
  Set.range localBasis ∪ Set.range localPair

private def natCoordinates {S : Set G} (n : S → Nat) : S → ? :=
  fun i |> n i

private def coordinateValue {S : Set G} [Fintype S] (n : S → Nat) : G :=
  ? i, n i * (i : G)

private theorem natCoordinates_injective {S : Set G} :
  Function.Injective (natCoordinates (S := S)) := by
  intro m n h
  funext i
  exact Nat.cast_injective (congrFun h i)

private theorem localBasis_coordinates {S : Set G} [Fintype S] (x : S) :
  localBasis x = natCoordinates (Pi.single x 1) := by
  funext i
  classical
  by_cases h : i = x
  * subst i
  simp [localBasis, natCoordinates]
  * simp [localBasis, natCoordinates, Pi.single_apply, h]

private theorem localPair_coordinates {S : Set G} [Fintype S] (p : S × S) :
  localPair p =
    natCoordinates (Pi.single p.1 1 + Pi.single p.2 1) := by
  rw [localPair, localBasis_coordinates, localBasis_coordinates]
  funext i
  simp [natCoordinates]

private theorem coordinateValue_single {S : Set G} [Fintype S] (x : S) :
  coordinateValue (Pi.single x 1) = x := by

```

```

classical
rw [coordinateValue, Finset.sum_eq_single x]
* simp
* intro b _ hbx
  simp [Pi.single_apply, hbx]
* simp

private theorem coordinateValue_add {S : Set G} [Fintype S] (m n : S → Nat) :
  coordinateValue (m + n) = coordinateValue m + coordinateValue n := by
  classical
  simp only [coordinateValue, Pi.add_apply, add_nsmul, Finset.sum_add_distrib]

private theorem natCoordinates_add {S : Set G} (m n : S → Nat) :
  natCoordinates m + natCoordinates n = natCoordinates (m + n) := by
  funext i
  simp [natCoordinates]

private def coordinateRelation {S : Set G} [Fintype S]
  (v w : S → ?) : Prop :=
  exists m n : S → Nat,
  natCoordinates m = v /\ natCoordinates n = w /\
  coordinateValue n ≤ coordinateValue m

private theorem coordinateRelation_encode_iff {S : Set G} [Fintype S]
  (m n : S → Nat) :
  coordinateRelation (natCoordinates m) (natCoordinates n) <=>
  coordinateValue n ≤ coordinateValue m := by
  constructor
  * rintro <m', n', hm, hn, hle>
  have hmm : m' = m := natCoordinates_injective hm
  have hnn : n' = n := natCoordinates_injective hn
  simp [hmm, hnn] using hle
  * intro hle
  exact <m, n, rfl, rfl, hle>

private theorem localTests_finite {S : Set G} [Fintype S] :
  (localTests S).Finite :=
  (Set.finite_range localBasis).union (Set.finite_range localPair)

private theorem localTests_rational {S : Set G} [Fintype S] :
  IsRationalSet (localTests S) := by
  rintro v (<x, rfl> | <p, rfl>) i
  * classical
  by_cases h : i = x
  * subst i
    exact <1, by simp [localBasis]>
  * exact <0, by simp [localBasis, Pi.single_apply, h]>
  * classical
  by_cases h_1 : i = p.1 <=> by_cases h_2 : i = p.2
  * subst i
    have : p.1 = p.2 := h_2
    exact <2, by simp [localPair, localBasis, this]; norm_num>
  * subst i
    exact <1, by simp [localPair, localBasis, Pi.single_apply, h_2]>
  * subst i
    exact <1, by simp [localPair, localBasis, Pi.single_apply, h_1]>
  * exact <0, by simp [localPair, localBasis, Pi.single_apply, h_1, h_2]>

private theorem localTests_closure_coordinates {S : Set G} [Fintype S]
  {v : S → ?} (hv : v in additiveClosure (localTests S)) :
  exists n : S → Nat, natCoordinates n = v := by
  induction hv using AddSubmonoid.closure_induction with
  | mem v hv =>

```

```

    rcases hv with <x, rfl> | <p, rfl>
    * exact <Pi.single x 1, localBasis_coordinates x |>.symm>
    * exact <Pi.single p.1 1 + Pi.single p.2 1,
      localPair_coordinates p |>.symm>
| zero => exact <fun _ |-> 0, by funext i; norm_num [natCoordinates]>
| add v w hv hw ihv ihw =>
  obtain <m, rfl> := ihv
  obtain <n, rfl> := ihw
  exact <m + n, natCoordinates_add m n |>.symm>

private theorem coordinateRelation_strictlyMonotonic {S : Set G} [Fintype S] :
  StrictlyMonotonic (additiveClosure (localTests S))
  (coordinateRelation (S := S)) := by
  refine <?_, ?_, ?_>
  * intro v hv w hw
    obtain <m, rfl> := localTests_closure_coordinates hv
    obtain <n, rfl> := localTests_closure_coordinates hw
    exact (le_total (coordinateValue n) (coordinateValue m)).imp
      (coordinateRelation_encode_iff m n |>.mpr)
      (coordinateRelation_encode_iff n m |>.mpr)
  * intro v_0 w_0 v_1 w_1 hv_0 hw_0 hv_1 hw_1 h_0 h_1
    obtain <m_0, n_0, rfl, rfl, h_0> := h_0
    obtain <m_1, n_1, hm_1, hn_1, h_1> := h_1
    subst v_1
    subst w_1
    rw [natCoordinates_add m_0 m_1, natCoordinates_add n_0 n_1,
      coordinateRelation_encode_iff, coordinateValue_add, coordinateValue_add]
    exact add_le_add h_0 h_1
  * intro v_0 w_0 v_1 w_1 hv_0 hw_0 hv_1 hw_1 heq h_1
    obtain <m_0, rfl> := localTests_closure_coordinates hv_0
    obtain <n_0, rfl> := localTests_closure_coordinates hw_0
    obtain <m_1, rfl> := localTests_closure_coordinates hv_1
    obtain <n_1, rfl> := localTests_closure_coordinates hw_1
    have hmn : m_0 + m_1 = n_0 + n_1 := by
      apply natCoordinates_injective
      rw [← natCoordinates_add, ← natCoordinates_add]
      exact heq
    have hvalue :
      coordinateValue m_0 + coordinateValue m_1 =
        coordinateValue n_0 + coordinateValue n_1 := by
      rw [← coordinateValue_add, ← coordinateValue_add, hmn]
    have htail : coordinateValue n_1 ≤ coordinateValue m_1 :=
      (coordinateRelation_encode_iff m_1 n_1).mp h_1
    apply (coordinateRelation_encode_iff n_0 m_0).mpr
    apply (add_le_add_iff_right (coordinateValue m_1)).mp
    rw [hvalue]
    simpa [add_comm] using add_le_add_left htail (coordinateValue n_0)

/-- Every finite subset of a linearly ordered abelian group admits a local
real embedding. It reflects the ambient order and preserves every equation
`x + y = z` all three of whose terms belong to the finite set. -/
theorem finite_local_real_embedding (S : Set G) (hS : S.Finite) :
  exists f : S -> ?,
    (forall x y : S, x ≤ y <=> f x ≤ f y) /\
    (forall x y z : S, (x : G) + y = z -> f x + f y = f z) := by
  letI : Fintype S := hS.fintype
  have hext :
    exists Rplus : (S -> ?) -> (S -> ?) -> Prop,
      ExtendsOn (localTests S) (additiveClosure (localTests S))
      (coordinateRelation (S := S)) Rplus /\
      StrictlyMonotonic (additiveClosure (localTests S)) Rplus :=
    <coordinateRelation, <AddSubmonoid.subset_closure, fun _ _ _ _ |-> Iff.rfl>,
      coordinateRelation_strictlyMonotonic>

```

```

obtain <phi, hphi> :=
  (scott_theorem_1_4 (localTests_finite (S := S))
    (localTests_rational (S := S))).mpr hext
refine <fun x |-> phi (localBasis x), ?_, ?_>
* intro x y
  have hx : localBasis x in localTests S := Or.inl <x, rfl>
  have hy : localBasis y in localTests S := Or.inl <y, rfl>
  rw [ <- hphi (localBasis y) hy (localBasis x) hx]
  rw [localBasis_coordinates, localBasis_coordinates,
    coordinateRelation_encode_iff, coordinateValue_single,
    coordinateValue_single]
  rfl
* intro x y z hxy
  have hp : localPair (x, y) in localTests S := Or.inr <(x, y), rfl>
  have hz : localBasis z in localTests S := Or.inl <z, rfl>
  have hpz : coordinateRelation (localPair (x, y)) (localBasis z) := by
    rw [localPair_coordinates, localBasis_coordinates,
      coordinateRelation_encode_iff, coordinateValue_add,
      coordinateValue_single, coordinateValue_single, coordinateValue_single,
      hxy]
  have hzp : coordinateRelation (localBasis z) (localPair (x, y)) := by
    rw [localPair_coordinates, localBasis_coordinates,
      coordinateRelation_encode_iff, coordinateValue_add,
      coordinateValue_single, coordinateValue_single, coordinateValue_single,
      hxy]
  have hle := (hphi (localPair (x, y)) hp (localBasis z) hz).mp hpz
  have hge := (hphi (localBasis z) hz (localPair (x, y)) hp).mp hzp
  simp [localPair, map_add] using le_antisymm hge hle

end Local

section Lexicographic

abbrev LexIntPair := Int x ? Int

def lexGenerators : Set LexIntPair :=
  {toLex (1, 0), toLex (0, 1)}

def lexPreference (x y : LexIntPair) : Prop :=
  (ofLex y).1 < (ofLex x).1 \ /
  (ofLex y).1 = (ofLex x).1 /\ (ofLex y).2 <= (ofLex x).2

theorem lexPreference_strictlyMonotonic :
  StrictlyMonotonic (additiveClosure lexGenerators) lexPreference := by
  refine <?_, ?_, ?_>
  * intro x hx y hy
    rcases x with <x_1, x_2>
    rcases y with <y_1, y_2>
    simp only [lexPreference, ofLex]
    omega
  * intro x_0 y_0 x_1 y_1 _ _ _ h_0 h_1
    rcases x_0 with <x_0_1, x_0_2>
    rcases y_0 with <y_0_1, y_0_2>
    rcases x_1 with <x_1_1, x_1_2>
    rcases y_1 with <y_1_1, y_1_2>
    change y_0_1 < x_0_1 \ / y_0_1 = x_0_1 /\ y_0_2 <= x_0_2 at h_0
    change y_1_1 < x_1_1 \ / y_1_1 = x_1_1 /\ y_1_2 <= x_1_2 at h_1
    change y_0_1 + y_1_1 < x_0_1 + x_1_1 \ /
      y_0_1 + y_1_1 = x_0_1 + x_1_1 /\ y_0_2 + y_1_2 <= x_0_2 + x_1_2
    omega
  * intro x_0 y_0 x_1 y_1 _ _ _ heq h_1
    rcases x_0 with <x_0_1, x_0_2>
    rcases y_0 with <y_0_1, y_0_2>

```

```

rcases x_1 with <x_1_1, x_1_2>
rcases y_1 with <y_1_1, y_1_2>
change y_1_1 < x_1_1 \ / y_1_1 = x_1_1 /\ y_1_2 <= x_1_2 at h_1
change x_0_1 < y_0_1 \ / x_0_1 = y_0_1 /\ x_0_2 <= y_0_2
change (x_0_1 + x_1_1, x_0_2 + x_1_2) =
  (y_0_1 + y_1_1, y_0_2 + y_1_2) at heq
have hfirst := congrArg Prod.fst heq
have hsecond := congrArg Prod.snd heq
simp only at hfirst hsecond
omega

/-- No additive real-valued functional realizes lexicographic comparison on
the whole lexicographically ordered group `Int x Int`. The obstruction already
uses the positive additive closure of the two nonzero generators: `(0,1) > 0`,
while every natural multiple `(0,n)` remains below `(1,0)`. -/
theorem no_global_real_additive_lex_realization :
  not exists f : LexIntPair -> + ?,
    forall x y, lexPreference x y <-> f y <= f x := by
rintro <f, hf>
let e_1 : LexIntPair := toLex (1, 0)
let e_2 : LexIntPair := toLex (0, 1)
have he_2pos : 0 < f e_2 := by
  have hstrict : lexPreference e_2 0 /\ not lexPreference 0 e_2 := by
    constructor
    * right
    norm_num [lexPreference, e_2]
    * intro h
    rcases h with h | h < ;> norm_num [lexPreference, e_2] at h
  have hnonneg := (hf e_2 0).mp hstrict.1
  have hne : f e_2 != 0 := by
    intro hzero
    apply hstrict.2
    apply (hf 0 e_2).mpr
    simp [hzero]
  have hnonneg' : 0 <= f e_2 := by simpa using hnonneg
  exact lt_of_le_of_ne hnonneg' (Ne.symm hne)
obtain <n, hn> := exists_nat_gt (f e_1 / f e_2)
have hlex : lexPreference e_1 (n * e_2) := by
  left
  change (0 : Int) < 1
  norm_num
have hbound := (hf e_1 (n * e_2)).mp hlex
simp only [map_nsmul] at hbound
have hlarge : f e_1 < n * f e_2 := by
  have := (mul_lt_mul_of_pos_right hn he_2pos)
  field_simp at this
  simpa [mul_comm] using this
exact (not_lt_of_ge hbound) (by simpa [nsmul_eq_mul] using hlarge)

end Lexicographic

end Scott1964.MeasurementStructures.LinearInequalities

```

A.9 Scott1964/MeasurementStructures/Preference/Direct.lean

270 lines.

Lean 4 source

```

import Mathlib
import Mathlib.Order.Antisymmetrization

```

```

/-!
# Direct finite semiorder representation

The order used here is the one introduced by Scott and Suppes (1958):
`x ? y` says that every predecessor of `x` is a predecessor of `y`, and
every successor of `y` is a successor of `x`. Its antisymmetrization is
the paper's quotient by substitutability.
-/

namespace Scott1964.MeasurementStructures

section WeakOrder

variable {A : Type u} (P : A → A → Prop)

/-- The Scott--Suppes weak order associated with a strict preference. -/
def ScottWeakOrder (x y : A) : Prop :=
  (forall z, P z x → P z y) /\ (forall z, P y z → P x z)

/-- Substitute alternatives have identical strict-preference profiles. -/
def PreferenceSubstitute (x y : A) : Prop :=
  (forall z, P z x ↔ P z y) /\ (forall z, P x z ↔ P y z)

theorem scottWeakOrder_refl (x : A) : ScottWeakOrder P x x :=
  <fun _ h |-> h, fun _ h |-> h>

theorem scottWeakOrder_trans :
  Transitive (ScottWeakOrder P) := by
  intro x y z hxy hyz
  exact <fun w hwx |-> hyz.1 w (hxy.1 w hwx),
    fun w hzw |-> hxy.2 w (hyz.2 w hzw)>

theorem scottWeakOrder_total
  (hirr : forall x, not P x x)
  (hA : forall x y z w, P x y → P z w → P x w /\ P z y)
  (hB : forall x y z w, P x y → P z x → P w y /\ P z w) :
  forall x y, ScottWeakOrder P x y /\ ScottWeakOrder P y x := by
  intro x y
  classical
  by_cases hxy : ScottWeakOrder P x y
  * exact Or.inl hxy
  by_cases hyx : ScottWeakOrder P y x
  * exact Or.inr hyx
  exfalse
  unfold ScottWeakOrder at hxy hyx
  rw [not_and_or] at hxy hyx
  rcases hxy with hxy | hxy
  * push_neg at hxy
  rcases hxy with <z, hzx, hzy>
  rcases hyx with hyx | hyx
  * push_neg at hyx
  rcases hyx with <w, hwy, hwnx>
  rcases hA z x w y hzx hwy with hzy | hwx
  * exact hzy hzy
  * exact hwnx hwx
  * push_neg at hyx
  rcases hyx with <w, hwx, hnyw>
  rcases hB x w z y hwx hzx with hyw | hzy
  * exact hnyw hyw
  * exact hzy hzy
  * push_neg at hxy
  rcases hxy with <z, hyz, hnxz>
  rcases hyx with hyx | hyx

```

```

* push_neg at hyx
rcases hyx with <w, hwy, hwnx>
rcases hB y z w x hyz hwy with hxz | hwx
* exact hnxz hxz
* exact hwnx hwx
* push_neg at hyx
rcases hyx with <w, hwx, hnyw>
rcases hA y z x w hyz hwx with hyw | hxz
* exact hnyw hyw
* exact hnxz hxz

theorem preferenceSubstitute_iff :
  PreferenceSubstitute P x y <->
    ScottWeakOrder P x y /\ ScottWeakOrder P y x := by
  constructor
* rintro <hin, hout>
  exact <<fun z |-> (hin z).mp, fun z |-> (hout z).mpr>,
    <fun z |-> (hin z).mpr, fun z |-> (hout z).mp>>
* rintro <hxy, hyx>
  exact <fun z |-> <hxy.1 z, hyx.1 z>,
    fun z |-> <hyx.2 z, hxy.2 z>>

theorem preference_implies_scottWeakOrder
  (hirr : forall x, not P x x)
  (hA : forall x y z w, P x y -> P z w -> P x w /\ P z y)
  {x y : A} (hxy : P x y) :
  ScottWeakOrder P x y := by
  have htrans : Transitive P := by
    intro a b c hab hbc
    rcases hA a b b c hab hbc with hac | hbb
    * exact hac
    * exact (hirr b hbb).elim
  exact <fun z hzx |-> htrans hzx hxy, fun z hyz |-> htrans hxy hyz>

theorem scottWeakOrder_preference_scottWeakOrder
  {x x_1 y_1 y : A} (hxx_1 : ScottWeakOrder P x x_1)
  (hx_1y_1 : P x_1 y_1) (hy_1y : ScottWeakOrder P y_1 y) : P x y :=
  hy_1y.1 x (hxx_1.2 y_1 hx_1y_1)

end WeakOrder

section FiniteStaircase

/-- A finite relation whose lower sections are nested along a linear order
has a unit-threshold representation. This is the finite recursive core of
the Scott--Suppes construction. -/
theorem finite_staircase_representation
  (A : Type u) [Fintype A] [LinearOrder A] (P : A -> A -> Prop)
  (hforward : forall {x y}, P x y -> y < x)
  (hmono : forall {x x' y y'}, x <= x' -> y' <= y -> P x y -> P x' y') :
  exists f : A -> ?,
    (forall x y, P x y <-> f x >= f y + 1) /\
    (forall {x y}, x < y -> f x < f y) := by
  classical
  induction hcard : Fintype.card A using Nat.strong_induction_on generalizing A with
  | h n ih =>
    by_cases hA : IsEmpty A
    * letI := hA
      exact <fun x |-> isEmptyElim x, by simp, by simp>
    * letI : Nonempty A := not_isEmpty_iff.mp hA
      let m : A := Finset.univ.max' Finset.univ_nonempty
      let B := {x : A // x != m}
      by_cases hB : IsEmpty B

```

```

* refine <fun _ |-> 0, ?_, ?_>
* intro x y
  have hx : x = m := by
    by_contra hx
    exact hB.false <x, hx>
  have hy : y = m := by
    by_contra hy
    exact hB.false <y, hy>
  subst x
  subst y
  simp only [ge_iff_le]
  constructor
* intro hmn
  exact (hforward hmn).false.elim
* norm_num
* intro x y hxy
  exact (hxy.ne (by
    have hx : x = m := by
      by_contra hx
      exact hB.false <x, hx>
    have hy : y = m := by
      by_contra hy
      exact hB.false <y, hy>
    simp [hx, hy])).elim
* letI : Nonempty B := not_isEmpty_iff.mp hB
let PB : B -> B -> Prop := fun x y |-> P x.1 y.1
have hcardB : Fintype.card B < n := by
  have hc : Fintype.card B = Fintype.card A - 1 := by
    simp [B]
  have hpos : 0 < Fintype.card A := Fintype.card_pos
  rw [← hcard]
  omega
obtain <g, hg, gmono> :=
  ih (Fintype.card B) hcardB B PB
  (fun h |-> hforward h)
  (fun hxx' hyy' h |-> hmono hxx' hyy' h) rfl
let nonpref : Finset B := Finset.univ.filter fun x |-> not P m x.1
let score : B -> ? := fun x |-> if P m x.1 then g x + 1 else g x
obtain <b, -, hb> :=
  Finset.exists_max_image (Finset.univ : Finset B) score Finset.univ_nonempty
let top : ? :=
  if hn : nonpref.Nonempty then
    let j := nonpref.min' hn
    (score b + (g j + 1)) / 2
  else score b + 1
have hscore_lt {j : B} (hj : not P m j.1) :
  score b < g j + 1 := by
  apply lt_of_le_of_lt (hb b (Finset.mem_univ b))
  dsimp [score]
  split_ifs with hpb
* have hbj : b < j := by
  apply lt_of_not_ge
  intro hjb
  exact hj (hmono le_rfl hjb hpb)
  linarith [gmono hbj]
* have hnot : not PB b j := by
  intro hbj
  have hbm : b.1 <= m :=
    Finset.le_max' Finset.univ b.1 (Finset.mem_univ b.1)
  exact hj (hmono hbm le_rfl hbj)
  have hlt := not_le.mp (mt (hg b j).mpr hnot)
  linarith
have htop_score : score b < top := by

```

```

dsimp [top]
split_ifs with hn
* let j := nonpref.min' hn
  have hj : not P m j.1 := by
    have hjmem := nonpref.min'_mem hn
    simpa [nonpref, j] using hjmem
  have hs := hscore_lt hj
  dsimp [j] at hs | -
  linarith
* linarith
have htop_nonpref {j : B} (hj : not P m j.1) :
  top < g j + 1 := by
dsimp [top]
split_ifs with hn
* let k := nonpref.min' hn
  have hk_mem : k in nonpref := nonpref.min'_mem hn
  have hkj : k <= j := nonpref.min'_le _ (by simp [nonpref, hj])
  have hgkj : g k <= g j := by
    rcases hkj.eq_or_lt with rfl | hlt
    * exact le_rfl
    * exact (gmono hlt).le
  have hk : not P m k.1 := by simpa [nonpref] using hk_mem
  have hs := hscore_lt hk
  dsimp [k] at hs hgkj | -
  linarith
* exact (hn < j, by simp [nonpref, hj])>.elim
let f : A -> ? := fun x |> if hx : x = m then top else g <x, hx>
refine <f, ?_, ?_>
* intro x y
  by_cases hx : x = m
* subst x
  by_cases hy : y = m
* subst y
  rw [show f m = top by simp [f]]
  exact <fun hmm |> (hforward hmm).false.elim, by simp>
* simp only [f, dif_pos rfl, dif_neg hy, ge_iff_le]
  constructor
* intro hmy
  have hsc : g <y, hy> + 1 = score <y, hy> := by
    simp [score, hmy]
  rw [hsc]
  exact (hb _ (Finset.mem_univ _)).trans htop_score.le
* intro hle
  by_contra hmy
  have hlt := htop_nonpref (j := <y, hy>) hmy
  linarith
* by_cases hy : y = m
* subst y
  simp only [f, dif_neg hx, dif_pos rfl]
  exact <fun h |> ((not_lt_of_ge (Finset.le_max' Finset.univ x
    (Finset.mem_univ x))) (hforward h)).elim, by
  intro hbad
  have hgs : g <x, hx> <= score <x, hx> := by
    dsimp [score]
    split_ifs <;> linarith
  have hlt :=
    (hgs.trans (hb _ (Finset.mem_univ _))).trans_lt htop_score
  linarith>
  * simpa [f, hx, hy, PB] using hg <x, hx> <y, hy>
* intro x y hxy
  by_cases hy : y = m
* subst y
  have hx : x != m := hxy.ne

```

```

      simp only [f, dif_neg hx, dif_pos rfl]
      have hgs : g <x, hx> <= score <x, hx> := by
        dsimp [score]
        split_ifs <;> linarith
      exact (hgs.trans (hb _ (Finset.mem_univ _))).trans_lt htop_score
    * have hx : x != m := by
      intro hx
      subst x
      exact (not_lt_of_ge (Finset.le_max' Finset.univ y
        (Finset.mem_univ y))) hxy
      simp [f, hx, hy] using gmono (show (<x, hx> : B) < <y, hy> from hxy)

end FiniteStaircase

end Scott1964.MeasurementStructures

```

A.10 Scott1964/MeasurementStructures/Preference/Cycle.lean

52 lines.

Lean 4 source

```

import Mathlib

/-!
# Local reductions in Scott's cycle argument

These lemmas are the three local moves used on pp. 8--9 of Scott (1964).
They are kept separate from the linear-inequality interface so that the
finite-array cancellation proof does not depend on names in S1.
-/

namespace Scott1964.MeasurementStructures

theorem preference_transitive_of_quadA {A : Type u} {P : A → A → Prop}
  (hirr : forall x, not P x x)
  (hquad : forall x y z w, P x y → P z w → P x w ∨ P z y) :
  Transitive P := by
  intro x y z hxy hyz
  rcases hquad x y y z hxy hyz with hxz | hyy
  * exact hxz
  * exact (hirr y hyy).elim

/-- Scott's first shortening move, for `z P x P y Q w`.
Here `y Q w` abbreviates `not w P y`. -/
theorem preference_shorten_ppq {A : Type u} {P : A → A → Prop}
  (hquad : forall x y z w, P x y → P z x → P w y ∨ P z w) {z x y w : A}
  (hzx : P z x) (hxy : P x y) (hyw : not P w y) :
  P z w := by
  rcases hquad x y z w hxy hzx with hwy | hzw
  * exact (hyw hwy).elim
  * exact hzw

/-- The rotated form of Scott's first shortening move, for `w Q z P x P y`.
Here `w Q z` abbreviates `not z P w`. -/
theorem preference_shorten_qpp {A : Type u} {P : A → A → Prop}
  (hquad : forall x y z w, P x y → P z x → P w y ∨ P z w) {w z x y : A}
  (hwz : not P z w) (hzx : P z x) (hxy : P x y) :
  P w y := by
  rcases hquad x y z w hxy hzx with hwy | hzw
  * exact hwy
  * exact (hwz hzw).elim

```

```

/-- Scott's alternating shortening move, for `x P y Q z P w`.
Here `y Q z` abbreviates `not z P y`. -/
theorem preference_shorten_pqp {A : Type u} {P : A -> A -> Prop}
  (hquad : forall x y z w, P x y -> P z w -> P x w \ / P z y) {x y z w : A}
  (hxy : P x y) (hyz : not P z y) (hzw : P z w) :
  P x w := by
  rcases hquad x y z w hxy hzw with hxx | hzy
  * exact hxx
  * exact (hyz hzy).elim
end Scott1964.MeasurementStructures

```

A.11 Scott1964/MeasurementStructures/Preference/Intransitive.lean

298 lines.

Lean 4 source

```

import Scott1964.MeasurementStructures.Preference.Direct

/-!
# Scott's intransitive-indifference problem

The definitions reproduce conditions `(1_P)`--`(3_P)` in S2. The elementary
direction of Theorem 2.1 is recorded here; the converse is supplied by the
finite linear-inequality engine.
-/

namespace Scott1964.MeasurementStructures

/-- A strict preference relation is represented with discrimination threshold `1`. -/
def RealizablePreference {A : Type u} (P : A -> A -> Prop) : Prop :=
  exists f : A -> ?, forall x y, P x y <-> f x >= f y + 1

/-- Scott 1964, condition `(1_P)`. -/
def PrefIrrefl {A : Type u} (P : A -> A -> Prop) : Prop :=
  forall x, not P x x

/-- Scott 1964, condition `(2_P)`. -/
def PrefQuada {A : Type u} (P : A -> A -> Prop) : Prop :=
  forall x y z w, P x y -> P z w -> P x w \ / P z y

/-- Scott 1964, condition `(3_P)`. -/
def PrefQuadb {A : Type u} (P : A -> A -> Prop) : Prop :=
  forall x y z w, P x y -> P z x -> P w y \ / P z w

/-- Realization with a strict margin above the conventional unit threshold. -/
def RealizablePreferenceWithGap {A : Type u} (P : A -> A -> Prop) : Prop :=
  exists f : A -> ?, exists ? > 0, forall x y, P x y <-> f x >= f y + 1 + ?

/-- Scott's stronger conclusion following Theorem 2.1: the same unit
threshold may be taken strict on every preferred pair. -/
def StrictlyRealizablePreference {A : Type u} (P : A -> A -> Prop) : Prop :=
  exists f : A -> ?, forall x y, P x y <-> f x > f y + 1

theorem RealizablePreference.irrefl {A : Type u} {P : A -> A -> Prop}
  (hP : RealizablePreference P) : PrefIrrefl P := by
  rcases hP with <f, hf>
  intro x hxx
  have := (hf x x).1 hxx
  linarith

```

```

theorem RealizablePreference.quadA {A : Type u} {P : A → A → Prop}
  (hP : RealizablePreference P) : PrefQuadA P := by
  rcases hP with <f, hf>
  intro x y z w hxy hzw
  rw [hf] at hxy hzw
  by_cases hwx : f w + 1 ≤ f x
  * exact Or.inl ((hf x w).2 hwx)
  * apply Or.inr
    apply (hf z y).2
    have hlt : f x < f w + 1 := lt_of_not_ge hwx
    linarith

theorem RealizablePreference.quadB {A : Type u} {P : A → A → Prop}
  (hP : RealizablePreference P) : PrefQuadB P := by
  rcases hP with <f, hf>
  intro x y z w hxy hzx
  rw [hf] at hxy hzx
  by_cases hwy : f y + 1 ≤ f w
  * exact Or.inl ((hf w y).2 hwy)
  * apply Or.inr
    apply (hf z w).2
    have hlt : f w < f y + 1 := lt_of_not_ge hwy
    linarith

theorem RealizablePreference.necessary {A : Type u} {P : A → A → Prop}
  (hP : RealizablePreference P) :
  PrefIrrefl P /\ PrefQuadA P /\ PrefQuadB P :=
  <hP.irrefl, hP.quadA, hP.quadB>

/-- **Scott 1964, Theorem 2.1 (intransitive indifference).**

The converse uses the direct finite Scott--Suppes construction: quotient by
substitutability, order the quotient by the weak order `ScottWeakOrder`, and
represent its nested lower sections by a recursively constructed sequence. -/
theorem theorem_2_1 {A : Type u} [Fintype A] [Nonempty A] (P : A → A → Prop) :
  RealizablePreference P ↔ PrefIrrefl P /\ PrefQuadA P /\ PrefQuadB P := by
  constructor
  * exact RealizablePreference.necessary
  * rintro <hirr, hA, hB>
    classical
    letI : Preorder A :=
    {
      le x y := ScottWeakOrder P y x
      le_refl x := scottWeakOrder_refl P x
      le_trans x y z hxy hyz := scottWeakOrder_trans P hyz hxy
      lt x y := ScottWeakOrder P y x /\ not ScottWeakOrder P x y
      lt_iff_le_not_ge _ _ := Iff.rfl
    }
    letI : Std.Total (a := A) (* ≤ *) :=
    <fun x y |-> scottWeakOrder_total P hirr hA hB y x>
    let Q := Antisymmetrization A (* ≤ *)
    letI : Finite Q :=
    Finite.of_surjective (toAntisymmetrization (a := A) (* ≤ *))
      (fun q |-> <ofAntisymmetrization (* ≤ *) q,
        toAntisymmetrization_ofAntisymmetrization (* ≤ *) q>)
    letI : Fintype Q := Fintype.ofFinite Q
    let PQ : Q → Q → Prop :=
    fun x y |-> P (ofAntisymmetrization (* ≤ *) x)
      (ofAntisymmetrization (* ≤ *) y)
    have hPQ_forward {x y : Q} (hxy : PQ x y) : y < x := by
      let ox := ofAntisymmetrization (* ≤ *) x
      let oy := ofAntisymmetrization (* ≤ *) y

```

```

have hle : y <= x := by
  rw [ <- toAntisymmetrization_ofAntisymmetrization (* <= *) y,
    <- toAntisymmetrization_ofAntisymmetrization (* <= *) x,
    toAntisymmetrization_le_toAntisymmetrization_iff]
  exact preference_implies_scottWeakOrder P hirr hA hxy
refine lt_of_le_of_ne hle ?_
intro heq
have hback : ScottWeakOrder P oy ox := by
  have : x <= y := heq.ge
  rw [ <- toAntisymmetrization_ofAntisymmetrization (* <= *) x,
    <- toAntisymmetrization_ofAntisymmetrization (* <= *) y,
    toAntisymmetrization_le_toAntisymmetrization_iff] at this
  exact this
exact hirr ox (hback.1 ox hxy)
have hPQ_mono {x x' y y' : Q} (hxx' : x <= x') (hyy' : y' <= y)
  (hxy : PQ x y) : PQ x' y' := by
  have hx :
    ScottWeakOrder P (ofAntisymmetrization (* <= *) x')
      (ofAntisymmetrization (* <= *) x) := by
  have hq :
    toAntisymmetrization (* <= *)
      (ofAntisymmetrization (* <= *) x) <=
      toAntisymmetrization (* <= *)
        (ofAntisymmetrization (* <= *) x') := by
    simpa only [toAntisymmetrization_ofAntisymmetrization] using hxx'
  change ScottWeakOrder P
    (ofAntisymmetrization (* <= *) x')
    (ofAntisymmetrization (* <= *) x) at hq
  exact hq
  have hy :
    ScottWeakOrder P (ofAntisymmetrization (* <= *) y)
      (ofAntisymmetrization (* <= *) y') := by
  have hq :
    toAntisymmetrization (* <= *)
      (ofAntisymmetrization (* <= *) y') <=
      toAntisymmetrization (* <= *)
        (ofAntisymmetrization (* <= *) y) := by
    simpa only [toAntisymmetrization_ofAntisymmetrization] using hyy'
  change ScottWeakOrder P
    (ofAntisymmetrization (* <= *) y)
    (ofAntisymmetrization (* <= *) y') at hq
  exact hq
  exact scottWeakOrder_preference_scottWeakOrder P hx hxy hy
obtain <g, hg, -> :=
  finite_staircase_representation Q PQ hPQ_forward hPQ_mono
refine <fun x |-> g (toAntisymmetrization (* <= *) x), fun x y |-> ?_>
let ox := ofAntisymmetrization (* <= *)
  (toAntisymmetrization (* <= *) x)
let oy := ofAntisymmetrization (* <= *)
  (toAntisymmetrization (* <= *) y)
have hx :
  PreferenceSubstitute P x ox := by
  apply (preferenceSubstitute_iff P).2
  constructor
  * have h :
    toAntisymmetrization (* <= *) ox <=
    toAntisymmetrization (* <= *) x := by
    simp [ox]
  exact h
  * have h :
    toAntisymmetrization (* <= *) x <=
    toAntisymmetrization (* <= *) ox := by
    simp [ox]

```

```

    exact h
have hy :
  PreferenceSubstitute P y oy := by
  apply (preferenceSubstitute_iff P).2
  constructor
  * have h :
    toAntisymmetrization (* <= *) oy <=
    toAntisymmetrization (* <= *) y := by
    simp [oy]
  exact h
  * have h :
    toAntisymmetrization (* <= *) y <=
    toAntisymmetrization (* <= *) oy := by
    simp [oy]
  exact h
  rw [show P x y <-> P ox oy from (hy.1 x).trans (hx.2 oy)]
  exact hg _ _

/-- Any positive discrimination threshold can be changed to `1` by a change
of units, as noted immediately before S1. -/
theorem realizablePreference_threshold_iff {A : Type u} (P : A -> A -> Prop)
  {c : ?} (hc : 0 < c) :
  (exists f : A -> ?, forall x y, P x y <-> f x >= f y + c) <->
  RealizablePreference P := by
  constructor
  * rintro <f, hf>
  refine <fun x |>-> f x / c, ?_>
  intro x y
  rw [hf]
  constructor <;> intro h
  * rw [show f y / c + 1 = (f y + c) / c by field_simp]
  exact (div_le_div_iff_of_pos_right hc).2 h
  * rw [show f y / c + 1 = (f y + c) / c by field_simp] at h
  exact (div_le_div_iff_of_pos_right hc).1 h
  * rintro <f, hf>
  refine <fun x |>-> c * f x, ?_>
  intro x y
  rw [hf]
  constructor <;> intro h
  * nlinarith
  * nlinarith

/-- Rescaling any unit-threshold realization produces an arbitrary positive
margin above the unit threshold. -/
theorem RealizablePreference.withGap {A : Type u} {P : A -> A -> Prop}
  (hP : RealizablePreference P) : RealizablePreferenceWithGap P := by
  rcases hP with <f, hf>
  refine <fun x |>-> 2 * f x, 1, by norm_num, ?_>
  intro x y
  rw [hf]
  constructor <;> intro h <;> nlinarith

theorem realizablePreferenceWithGap_iff {A : Type u} (P : A -> A -> Prop) :
  RealizablePreferenceWithGap P <-> RealizablePreference P := by
  constructor
  * rintro <f, ?, h?, hf>
  exact (realizablePreference_threshold_iff P (by linarith : 0 < 1 + ?)).mp
  <f, by simp [add_assoc] using hf>
  * exact RealizablePreference.withGap

/-- On a finite set the boundary can be avoided altogether, as Scott notes
after Theorem 2.1: preferred pairs lie strictly beyond the same unit
threshold. -/

```

```

theorem RealizablePreference.strict_of_finite {A : Type u} [Fintype A] [Nonempty A]
  {P : A → A → Prop} (hP : RealizablePreference P) :
  StrictlyRealizablePreference P := by
classical
rcases hP with <f, hf>
let values : Finset ? :=
  (Finset.univ x ? Finset.univ).image fun p : A × A |>
    if P p.1 p.2 then 0 else max 0 (f p.1 - f p.2)
have hvalues : values.Nonempty := by
  let a : A := Classical.choice ?Nonempty A
  exact <if P a a then 0 else max 0 (f a - f a),
    Finset.mem_image.mpr <(a, a), by simp, rfl>>
let M : ? := values.max' hvalues
have hM_nonneg : 0 ≤ M := by
  obtain <v, hv> := hvalues
  have hv_nonneg : 0 ≤ v := by
    rcases Finset.mem_image.mp hv with <p, -, rfl>
    split <;> simp
  exact hv_nonneg.trans (Finset.le_max' values v hv)
have hM_lt_one : M < 1 := by
  apply (Finset.max'_lt_iff values hvalues).mpr
  intro v hv
  rcases Finset.mem_image.mp hv with <p, -, rfl>
  split_ifs with hp
  * norm_num
  * have hlt : f p.1 - f p.2 < 1 := by
      have := not_le.mp (mt (hf p.1 p.2).mpr hp)
      linarith
    exact max_lt (by norm_num) hlt
have hbound {x y : A} (hxy : not P x y) : f x - f y ≤ M := by
  have hmem : max 0 (f x - f y) in values := by
    exact Finset.mem_image.mpr <(x, y), by simp, by simp [hxy]>
  exact (le_max_right 0 (f x - f y)).trans (Finset.le_max' values _ hmem)
let s : ? := 1 + (1 - M) / 2
have hs : 1 < s := by
  dsimp [s]
  linarith
refine <fun x |> s * f x, fun x y |> ?_>
constructor
* intro hxy
  have hdiff : 1 ≤ f x - f y := by
    have := (hf x y).mp hxy
    linarith
  have hspos : 0 < s := lt_trans (by norm_num) hs
  have : s ≤ s * (f x - f y) := by nlinarith
  dsimp
  nlinarith
* intro hstrict
  by_contra hxy
  have hd := hbound hxy
  have hdiff_lt : f x - f y < 1 := by
    have := not_le.mp (mt (hf x y).mpr hxy)
    linarith
  have hspos : 0 < s := lt_trans (by norm_num) hs
  have hscaled : s * (f x - f y) ≤ 1 := by
    by_cases hd0 : f x - f y ≤ 0
    * nlinarith
    * have hprod : s * (f x - f y) ≤ s * M :=
        mul_le_mul_of_nonneg_left hd hspos.le
      dsimp [s] at hprod |-
      nlinarith [mul_nonneg (sub_nonneg.mpr hM_nonneg)
        (sub_nonneg.mpr (le_of_lt hM_lt_one))]
    dsimp at hstrict

```

```

nlinarith
end Scott1964.MeasurementStructures

```

A.12 Scott1964/MeasurementStructures/Differences/Pair.lean

266 lines.

Lean 4 source

```

import Scott1964.MeasurementStructures.FinHead
import Scott1964.MeasurementStructures.LinearInequalities.ScottTheorems

/--
# Additive utility for pairs

This is Scott 1964, Theorem 3.1.
-/

namespace Scott1964.MeasurementStructures

open scoped BigOperators
open scoped Classical

/-- The incidence vector of a pair, with one coordinate in each summand. -/
noncomputable def pairVector {A : Type u} {A' : Type v} (x : A) (x' : A') :
  Sum A A' -> ? :=
  Pi.single (Sum.inl x) 1 + Pi.single (Sum.inr x') 1

theorem pairVector_injective {A : Type u} {A' : Type v} :
  Function.Injective (Function.uncurry (@pairVector A A')) := by
  rintro <x, x'> <y, y'> h
  have hx := congrFun h (Sum.inl x)
  have hx' := congrFun h (Sum.inr x')
  simp [pairVector, Pi.single_apply] at hx hx'
  exact Prod.ext hx hx'

/-- Equality of sums of incidence vectors gives the two independent
permutations of coordinates used in condition `(2_V)`. -/
theorem pairVector_sum_eq_permutations {A : Type u} {A' : Type v}
  {? : Type*} [Fintype ?] (x y : ? -> A) (x' y' : ? -> A')
  (h : ? i, pairVector (x i) (x' i) =
    ? i, pairVector (y i) (y' i)) :
  exists ? sigma : Equiv.Perm ?,
  (forall i, y i = x (? i)) /\ (forall i, y' i = x' (sigma i)) := by
  classical
  have hleft (a : A) :
    Fintype.card {i // y i = a} = Fintype.card {i // x i = a} := by
    have ha := congrFun h (Sum.inl a)
    simp only [Fintype.sum_apply, pairVector, Pi.add_apply, Pi.single_apply,
      Sum.inl.injEq, Sum.inl_ne_inr, reduceIte, add_zero] at ha
    have hy :
      Fintype.card {i // y i = a} =
        (Finset.univ.filter fun i |> y i = a).card := by
    rw [ <- Fintype.card_coe]
    exact Fintype.card_congr
      (Equiv.subtypeEquivRight fun i |> by simp)
  have hx :
    Fintype.card {i // x i = a} =
      (Finset.univ.filter fun i |> x i = a).card := by
    rw [ <- Fintype.card_coe]
    exact Fintype.card_congr

```

```

      (Equiv.subtypeEquivRight fun i |-> by simp)
    rw [hy, hx]
    rw [Finset.card_filter, Finset.card_filter]
    exact_mod_cast (by simp [eq_comm] using ha.symm)
  have hright (a : A') :
    Fintype.card {i // y' i = a} = Fintype.card {i // x' i = a} := by
    have ha := congrFun h (Sum.inr a)
    simp only [Fintype.sum_apply, pairVector, Pi.add_apply, Pi.single_apply,
      Sum.inr.injEq, Sum.inr_ne_inl, reduceIte, zero_add] at ha
    have hy :
      Fintype.card {i // y' i = a} =
        (Finset.univ.filter fun i |-> y' i = a).card := by
      rw [← Fintype.card_coe]
      exact Fintype.card_congr
      (Equiv.subtypeEquivRight fun i |-> by simp)
    have hx :
      Fintype.card {i // x' i = a} =
        (Finset.univ.filter fun i |-> x' i = a).card := by
      rw [← Fintype.card_coe]
      exact Fintype.card_congr
      (Equiv.subtypeEquivRight fun i |-> by simp)
    rw [hy, hx]
    rw [Finset.card_filter, Finset.card_filter]
    exact_mod_cast (by simp [eq_comm] using ha.symm)
let ? : Equiv.Perm ? :=
  Equiv.ofFiberEquiv fun a |-> Fintype.equivOfCardEq (hleft a)
let sigma : Equiv.Perm ? :=
  Equiv.ofFiberEquiv fun a |-> Fintype.equivOfCardEq (hright a)
refine <?, sigma, ?_, ?_>
* intro i
  change y i = x ((Equiv.ofFiberEquiv
    (fun a |-> Fintype.equivOfCardEq (hleft a))) i)
  exact ((Fintype.equivOfCardEq (hleft (y i)))
    ((Equiv.sigmaFiberEquiv y).symm i).2).2.symm
* intro i
  change y' i = x' ((Equiv.ofFiberEquiv
    (fun a |-> Fintype.equivOfCardEq (hright a))) i)
  exact ((Fintype.equivOfCardEq (hright (y' i)))
    ((Equiv.sigmaFiberEquiv y').symm i).2).2.symm

/-- A relation on pairs is represented by the sum of two utility functions. -/
def RealizableUtilityPair {A : Type u} {A' : Type v}
  (V : A -> A' -> A -> A' -> Prop) : Prop :=
  exists f : A -> ?, exists f' : A' -> ?,
    forall x x' y y', V x x' y y' <-> f x + f' x' >= f y + f' y'

/-- Scott 1964, condition `(1_V)` -/
def PairTotal {A : Type u} {A' : Type v}
  (V : A -> A' -> A -> A' -> Prop) : Prop :=
  forall x x' y y', V x x' y y' \ / V y y' x x'

/-- Scott 1964, condition `(2_V)`, indexed at length `n + 1` so that the
distinguished index `0` always exists. -/
def PairPermutation {A : Type u} {A' : Type v}
  (V : A -> A' -> A -> A' -> Prop) : Prop :=
  forall (n : Nat) (x : Fin (n + 1) -> A) (x' : Fin (n + 1) -> A')
    (? sigma : Equiv.Perm (Fin (n + 1))),
    (forall i, i != finHead n -> V (x i) (x' i) (x (? i)) (x' (sigma i))) ->
      V (x (? (finHead n))) (x' (sigma (finHead n))) (x (finHead n)) (x' (finHead n))

/-- Scott's observation following `(2_V)`: the permutation condition already
implies transitivity. -/
theorem PairPermutation.transitive {A : Type u} {A' : Type v}

```

```

    {V : A -> A' -> A -> A' -> Prop} (hV : PairPermutation V) :
    forall p q r : A x A',
      V p.1 p.2 q.1 q.2 -> V q.1 q.2 r.1 r.2 -> V p.1 p.2 r.1 r.2 := by
rintro <x, x'> <y, y'> <z, z'> hxy hyz
let p : Equiv.Perm (Fin 3) :=
  Equiv.ofBijective ![1, 2, 0] (by native_decide)
apply hV 2 ![z, x, y] ![z', x', y'] p p
intro i hi
have hi0 : i != 0 := by simpa [finHead_eq_zero] using hi
fin_cases i
* contradiction
* simpa [p] using hxy
* simpa [p] using hyz

theorem RealizableUtilityPair.total {A : Type u} {A' : Type v}
  {V : A -> A' -> A -> A' -> Prop} (hV : RealizableUtilityPair V) :
  PairTotal V := by
  rcases hV with <f, f', hrep>
  intro x x' y y'
  rcases le_total (f y + f' y') (f x + f' x') with h | h
  * exact Or.inl ((hrep x x' y y').2 h)
  * exact Or.inr ((hrep y y' x x').2 h)

theorem RealizableUtilityPair.permutation {A : Type u} {A' : Type v}
  {V : A -> A' -> A -> A' -> Prop} (hV : RealizableUtilityPair V) :
  PairPermutation V := by
  rcases hV with <f, f', hrep>
  intro n x x' ? sigma h
  let s : Fin (n + 1) -> ? := fun i |> f (x i) + f' (x' i)
  let t : Fin (n + 1) -> ? := fun i |> f (x (? i)) + f' (x' (sigma i))
  have h? : ? i, f (x (? i)) = ? i, f (x i) :=
    Fintype.sum_equiv ? _ _ (fun _ |> rfl)
  have hsigma : ? i, f' (x' (sigma i)) = ? i, f' (x' i) :=
    Fintype.sum_equiv sigma _ _ (fun _ |> rfl)
  have hsum : ? i, s i = ? i, t i := by
    simp only [s, t, Finset.sum_add_distrib]
    rw [h?, hsigma]
  have hrest :
    ? i in (Finset.univ.erase (finHead n)), t i <=
    ? i in (Finset.univ.erase (finHead n)), s i := by
    apply Finset.sum_le_sum
    intro i hi
    have hi0 : i != finHead n := by
      simpa using (Finset.mem_erase.mp hi).1
    exact (hrep _ _ _).1 (h i hi0)
  apply (hrep _ _ _).2
  have hzero : finHead n in Finset.univ := Finset.mem_univ _
  have hs := Finset.sum_erase_add _ s hzero
  have ht := Finset.sum_erase_add _ t hzero
  dsimp only [s, t] at *
  linarith

theorem RealizableUtilityPair.necessary {A : Type u} {A' : Type v}
  {V : A -> A' -> A -> A' -> Prop} (hV : RealizableUtilityPair V) :
  PairTotal V /\ PairPermutation V :=
  <hV.total, hV.permutation>

/-- **Scott 1964, Theorem 3.1 (additive utility for pairs).** -/
theorem theorem_3_1 {A : Type u} {A' : Type v}
  [Fintype A] [Nonempty A] [Fintype A'] [Nonempty A']
  (V : A -> A' -> A -> A' -> Prop) :
  RealizableUtilityPair V <-> PairTotal V /\ PairPermutation V := by
  constructor

```

```

* exact RealizableUtilityPair.necessary
* rintro <htotal, hperm>
let Y : Set (Sum A A' -> ?) :=
  Set.range (Function.uncurry (@pairVector A A'))
let R : (Sum A A' -> ?) -> (Sum A A' -> ?) -> Prop :=
  fun z w |> forall x x' y y',
    z = pairVector x x' -> w = pairVector y y' -> V x x' y y'
have hR_pair (x : A) (x' : A') (y : A) (y' : A') :
  R (pairVector x x') (pairVector y y') <-> V x x' y y' := by
  constructor
* intro h
  exact h x x' y y' rfl rfl
* intro h a a' b b' ha hb
  have hxa : (x, x') = (a, a') :=
    pairVector_injective ha
  have hyb : (y, y') = (b, b') :=
    pairVector_injective hb
  have hxa_1 : x = a := congrArg Prod.fst hxa
  have hxa_2 : x' = a' := congrArg Prod.snd hxa
  have hyb_1 : y = b := congrArg Prod.fst hyb
  have hyb_2 : y' = b' := congrArg Prod.snd hyb
  simpa [ <- hxa_1, <- hxa_2, <- hyb_1, <- hyb_2 ] using h
have hYfinite : Y.Finite := Set.finite_range _
have hYrat : LinearInequalities.IsRationalSet Y := by
  rintro z <<x, x'>, rfl> s
  rcases s with a | a'
* by_cases ha : a = x
  * exact <1, by simp [pairVector, ha]>
  * exact <0, by simp [pairVector, ha]>
* by_cases ha : a' = x'
  * exact <1, by simp [pairVector, ha]>
  * exact <0, by simp [pairVector, ha]>
have hcomplete : LinearInequalities.RelationComplete Y R := by
  rintro z <<x, x'>, rfl> w <<y, y'>, rfl>
  change R (pairVector x x') (pairVector y y') \ /
    R (pairVector y y') (pairVector x x')
  rw [hR_pair, hR_pair]
  exact htotal x x' y y'
have hcancel : LinearInequalities.RelationSequenceCancellation Y R := by
  intro n z w hz hw hR hsum
  choose p hp using hz
  choose q hq using hw
  let x : Fin (n + 1) -> A := fun i |> (p i).1
  let x' : Fin (n + 1) -> A' := fun i |> (p i).2
  let y : Fin (n + 1) -> A := fun i |> (q i).1
  let y' : Fin (n + 1) -> A' := fun i |> (q i).2
  have hx (i) : z i = pairVector (x i) (x' i) := by
    have hi := hp i
    change pairVector (p i).1 (p i).2 = z i at hi
    simpa [x, x'] using hi.symm
  have hy (i) : w i = pairVector (y i) (y' i) := by
    have hi := hq i
    change pairVector (q i).1 (q i).2 = w i at hi
    simpa [y, y'] using hi.symm
  have hsum' :
    ? i, pairVector (x i) (x' i) =
      ? i, pairVector (y i) (y' i) := by
    simpa only [hx, hy] using hsum
  obtain <?, sigma, h?, hsigma> :=
    pairVector_sum_eq_permutations x y x' y' hsum'
  intro i
  let tau : Equiv.Perm (Fin (n + 1)) := Equiv.swap (finHead n) i
  let ?' : Equiv.Perm (Fin (n + 1)) := tau.trans (?'.trans tau)

```

```

let sigma' : Equiv.Perm (Fin (n + 1)) := tau.trans (sigma.trans tau)
have hconcl := hperm n (fun j |-> x (tau j)) (fun j |-> x' (tau j)) ?' sigma' (by
  intro j hj
  have htau_j : tau j != i := by
    intro heq
    have : j = finHead n := tau.injective (by simpa [tau] using heq)
    exact hj this
  have hvR := hR (tau j)
  rw [hx (tau j), hy (tau j), hR_pair] at hvR
  have hv := hvR
  simpa [?', sigma', tau, h? (tau j), hsigma (tau j)] using hv)
rw [hy i, hx i, hR_pair]
simpa [?', sigma', tau, h? i, hsigma i] using hconcl
obtain <phi, hphi> :=
  (LinearInequalities.scott_theorem_1_3 hYfinite hYrat).2
  <hcomplete, hcancel>
refine <fun x |-> phi (Pi.single (Sum.inl x) 1),
  fun x' |-> phi (Pi.single (Sum.inr x') 1), ?_>
intro x x' y y'
have hxy := hphi (pairVector x x') <(x, x'), rfl>
  (pairVector y y') <(y, y'), rfl>
rw [hR_pair] at hxy
simpa only [pairVector, map_add] using hxy

```

end Scott1964.MeasurementStructures

A.13 Scott1964/MeasurementStructures/Differences/Ordered.lean

103 lines.

Lean 4 source

```

import Scott1964.MeasurementStructures.Differences.Pair

/-!
# Ordered differences

Scott's reduction of the one-utility problem to Theorem 3.1 is entirely
algebraic. The key point is that reversal lets the two utilities be combined.
-/

namespace Scott1964.MeasurementStructures

/-- Representation of comparisons of utility differences. -/
def RealizableDifference {A : Type u} (D : A -> A -> A -> A -> Prop) : Prop :=
  exists f : A -> ?, forall x y z w, D x y z w <=> f x - f y >= f z - f w

/-- Scott 1964, condition `(1_D)`. -/
def DiffTotal {A : Type u} (D : A -> A -> A -> A -> Prop) : Prop :=
  forall x y z w, D x y z w \ / D z w x y

/-- Scott 1964, condition `(2_D)`. -/
def DiffPermutation {A : Type u} (D : A -> A -> A -> A -> Prop) : Prop :=
  forall (n : Nat) (x y : Fin (n + 1) -> A) (? sigma : Equiv.Perm (Fin (n + 1))),
    (forall i, i != finHead n -> D (x i) (y i) (x (? i)) (y (sigma i))) ->
      D (x (? (finHead n))) (y (sigma (finHead n))) (x (finHead n)) (y (finHead n))

/-- Scott 1964, condition `(3_D)`. -/
def DiffReversal {A : Type u} (D : A -> A -> A -> A -> Prop) : Prop :=
  forall x y z w, D x y z w -> D w z y x

theorem RealizableDifference.utilityPair {A : Type u}

```

```

    {D : A -> A -> A -> A -> Prop} (hD : RealizableDifference D) :
      RealizableUtilityPair D := by
    rcases hD with <f, hf>
    refine <f, fun y |-> -f y, ?_>
    intro x y z w
    rw [hf]
    constructor <;> intro h <;> dsimp at h |-> <;> linarith

theorem RealizableDifference.reversal {A : Type u}
  {D : A -> A -> A -> A -> Prop} (hD : RealizableDifference D) :
    DiffReversal D := by
  rcases hD with <f, hf>
  intro x y z w h
  rw [hf] at h |->
  linarith

theorem RealizableDifference.necessary {A : Type u}
  {D : A -> A -> A -> A -> Prop} (hD : RealizableDifference D) :
    DiffTotal D /\ DiffPermutation D /\ DiffReversal D := by
  have hp := hD.utilityPair.necessary
  exact <hp.1, hp.2, hD.reversal>

/-- The combining-utilities argument in the proof of Theorem 3.2. -/
theorem difference_of_pair_and_reversal {A : Type u}
  {D : A -> A -> A -> A -> Prop} (hp : RealizableUtilityPair D)
  (hr : DiffReversal D) : RealizableDifference D := by
  rcases hp with <g, q, hrep>
  refine <fun x |-> g x - q x, ?_>
  intro x y z w
  constructor
  * intro h
    have h_1 := (hrep x y z w).1 h
    have h_2 := (hrep w z y x).1 (hr x y z w h)
    dsimp
    linarith
  * intro hdiff
    by_contra hn
    have hstrict : g x + q y < g z + q w :=
      lt_of_not_ge (fun h |-> hn ((hrep x y z w).2 h))
    have hreverse : D z w x y := (hrep z w x y).2 (le_of_lt hstrict)
    have h_2 := (hrep y x w z).1 (hr z w x y hreverse)
    dsimp at hdiff
    linarith

/-- The exact logical reduction used for Theorem 3.2. -/
theorem realizableDifference_iff_pair_reversal {A : Type u}
  (D : A -> A -> A -> A -> Prop) :
    RealizableDifference D <-> RealizableUtilityPair D /\ DiffReversal D := by
  exact <fun h |-> <h.utilityPair, h.reversal>,
    fun h |-> difference_of_pair_and_reversal h.1 h.2>

/-- Once Theorem 3.1 is available, its sufficiency immediately yields Scott's
Theorem 3.2 through the preceding combining lemma. -/
theorem difference_sufficient_of_pair_sufficient {A : Type u}
  (pairSufficient :
    forall V : A -> A -> A -> A -> Prop,
      PairTotal V /\ PairPermutation V -> RealizableUtilityPair V)
  {D : A -> A -> A -> A -> Prop}
  (hD : DiffTotal D /\ DiffPermutation D /\ DiffReversal D) :
    RealizableDifference D :=
  difference_of_pair_and_reversal (pairSufficient D <hD.1, hD.2.1>) hD.2.2

/-- **Scott 1964, Theorem 3.2 (ordered differences).** -/

```

```

theorem theorem_3_2 {A : Type u} [Fintype A] [Nonempty A]
  (D : A → A → A → A → Prop) :
  RealizableDifference D <=> DiffTotal D /\ DiffPermutation D /\ DiffReversal D := by
  constructor
  * exact RealizableDifference.necessary
  * rintro <htotal, hperm, hreversal>
  exact difference_of_pair_and_reversal
    ((theorem_3_1 D).2 <htotal, hperm>) hreversal

end Scott1964.MeasurementStructures

```

A.14 Scott1964/MeasurementStructures/Probability/Basic.lean

176 lines.

Lean 4 source

```

import Mathlib
import Scott1964.MeasurementStructures.FinHead

/-!
# Finitely additive probabilities on Boolean algebras

Scott's probabilities are real-valued and finitely additive. This file deliberately
does not use Mathlib's countably additive `MeasureTheory.Measure`: the source works
with an arbitrary Boolean algebra and only finite disjoint unions.
-/

namespace Scott1964.MeasurementStructures

open scoped BigOperators Classical

/-- A normalized finitely additive probability on a Boolean algebra. -/
structure IsProbability {B : Type u} [BooleanAlgebra B] (? : B → ?) : Prop where
  bot : ? False = 0
  top : ? top = 1
  additive : forall x y, Disjoint x y → ? (x sqsup y) = ? x + ? y
  nonnegative : forall x, 0 <= ? x

/-- A finitely additive signed charge. Unlike `IsProbability`, no
nonnegativity or normalization is imposed. -/
structure IsSignedCharge {B : Type u} [BooleanAlgebra B] (? : B → ?) : Prop where
  bot : ? False = 0
  additive : forall x y, Disjoint x y → ? (x sqsup y) = ? x + ? y

/-- Nonnegativity of a finitely additive set function. -/
def IsNonnegative {B : Type u} [BooleanAlgebra B] (? : B → ?) : Prop :=
  forall x, 0 <= ? x

/-- Compatibility name for a finitely additive probability. -/
def IsFinitelyAdditiveProbability {B : Type u} [BooleanAlgebra B] (? : B → ?) : Prop :=
  IsProbability ?

/-- A qualitative ordering is represented exactly by a normalized additive function. -/
def RealizableProbability {B : Type u} [BooleanAlgebra B] (R : B → B → Prop) : Prop :=
  exists ? : B → ?, IsProbability ? /\ forall x y, R x y <=> ? x >= ? y

/-- A qualitative relation is represented by a finitely additive signed
charge, with no normalization or positivity requirement. -/
def RealizableSignedCharge {B : Type u} [BooleanAlgebra B]
  (R : B → B → Prop) : Prop :=
  exists ? : B → ?, IsSignedCharge ? /\ forall x y, R x y <=> ? x >= ? y

```

```

/-- Scott's strict notation: `x ? y` means that `y` is not weakly preferred to `x`. -/
def StrictlyPreferred {B : Type u} (R : B -> B -> Prop) (x y : B) : Prop :=
  not R y x

/-- Scott 1964, condition `(1_B)`: the certain event is strictly above the null event. -/
def ProbNontrivial {B : Type u} [BooleanAlgebra B] (R : B -> B -> Prop) : Prop :=
  R top False /\ not R False top

/-- Scott 1964, condition `(2_B)`: every event is at least as likely as null. -/
def ProbNonneg {B : Type u} [BooleanAlgebra B] (R : B -> B -> Prop) : Prop :=
  forall x, R x False

/-- Scott 1964, condition `(3_B)`: qualitative probabilities are comparable. -/
def ProbTotal {B : Type u} [BooleanAlgebra B] (R : B -> B -> Prop) : Prop :=
  forall x y, R x y \/ R y x

/-- Scott 1964, condition `(4_B)`. The equality says that every atom occurs
equally often on the two sides. -/
def ProbCancellation {B : Type u} [BooleanAlgebra B] [Fintype B]
  (R : B -> B -> Prop) : Prop :=
  forall (n : Nat) (x y : Fin (n + 1) -> B),
    (forall a : B, IsAtom a ->
      (? i, if a <= x i then 1 else 0) =
      (? i, if a <= y i then 1 else 0 : Nat)) ->
      (forall i, i != finHead n -> R (x i) (y i)) -> R (y (finHead n)) (x (finHead n))

/-- Transitivity, de Finetti's condition (iv). -/
def ProbTransitive {B : Type u} (R : B -> B -> Prop) : Prop :=
  forall ?x y z?, R x y -> R y z -> R x z

/-- Invariance under adjoining one event disjoint from both sides, de Finetti's
condition (v). -/
def ProbDisjointUnionInvariant {B : Type u} [BooleanAlgebra B]
  (R : B -> B -> Prop) : Prop :=
  forall ?x y z?, Disjoint z x -> Disjoint z y ->
    (R x y <-> R (x sqsup z) (y sqsup z))

/-- De Finetti's five qualitative-probability axioms. Condition (i) is
literally `not R False top`; it does not include Scott's additional `R top False`
conjunct from `(1_B)`. -/
structure DeFinettiAxioms {B : Type u} [BooleanAlgebra B]
  (R : B -> B -> Prop) : Prop where
  nontrivial : not R False top
  bottom : forall x, R x False
  total : ProbTotal R
  transitive : ProbTransitive R
  disjointUnionInvariant : ProbDisjointUnionInvariant R

theorem IsProbability.compl {B : Type u} [BooleanAlgebra B] {? : B -> ?}
  (h? : IsProbability ?) (x : B) : ? x? = 1 - ? x := by
  have hd : Disjoint x x? := disjoint_compl_right
  have h := h?.additive x x? hd
  rw [sup_compl_eq_top, h?.top] at h
  linarith

theorem IsProbability.mono_of_nonnegative {B : Type u} [BooleanAlgebra B]
  {? : B -> ?} (h? : IsProbability ?) (hn : IsNonnegative ?)
  ?x y : B? (hxy : x <= y) : ? x <= ? y := by
  have hd : Disjoint x (y \ x) := by
    rw [disjoint_iff_inf_le]
    simp
  have hy : x sqsup (y \ x) = y := by

```

```

    exact sup_sdiff_cancel_right hxy
  rw [ <- hy, h?.additive _ _ hd]
  exact le_add_of_nonneg_right (hn _)

theorem IsProbability.mono {B : Type u} [BooleanAlgebra B]
  {? : B -> ?} (h? : IsProbability ?) ?x y : B? (hxy : x <= y) :
  ? x <= ? y :=
  h?.mono_of_nonnegative h?.nonnegative hxy

theorem IsProbability.le_one_of_nonnegative {B : Type u} [BooleanAlgebra B]
  {? : B -> ?} (h? : IsProbability ?) (hn : IsNonnegative ?) (x : B) :
  ? x <= 1 := by
  simpa [h?.top] using h?.mono_of_nonnegative hn (show x <= (top : B) from le_top)

theorem IsProbability.le_one {B : Type u} [BooleanAlgebra B]
  {? : B -> ?} (h? : IsProbability ?) (x : B) : ? x <= 1 :=
  h?.le_one_of_nonnegative h?.nonnegative x

theorem RealizableProbability.nonnegative {B : Type u} [BooleanAlgebra B]
  {R : B -> B -> Prop} (hR : RealizableProbability R) (_h0 : ProbNonneg R) :
  exists ? : B -> ?, IsFinitelyAdditiveProbability ? /\
    forall x y, R x y <-> ? x >= ? y := by
  rcases hR with <?, h?, hrep>
  exact <?, h?, hrep>

theorem RealizableProbability.probNonneg {B : Type u} [BooleanAlgebra B]
  {R : B -> B -> Prop} (hR : RealizableProbability R) :
  ProbNonneg R := by
  rcases hR with <?, h?, hrep>
  intro x
  apply (hrep x False).2
  simpa [h?.bot] using h?.nonnegative x

theorem RealizableProbability.probTotal {B : Type u} [BooleanAlgebra B]
  {R : B -> B -> Prop} (hR : RealizableProbability R) : ProbTotal R := by
  rcases hR with <?, -, hrep>
  intro x y
  rcases le_total (? y) (? x) with h | h
  * exact Or.inl ((hrep x y).2 h)
  * exact Or.inr ((hrep y x).2 h)

theorem RealizableProbability.probNontrivial {B : Type u} [BooleanAlgebra B]
  {R : B -> B -> Prop} (hR : RealizableProbability R) :
  ProbNontrivial R := by
  rcases hR with <?, h?, hrep>
  constructor
  * exact (hrep top False).2 (by rw [h?.top, h?.bot]; norm_num)
  * intro h
    have := (hrep False top).1 h
    rw [h?.top, h?.bot] at this
    norm_num at this

theorem RealizableProbability.probTransitive {B : Type u} [BooleanAlgebra B]
  {R : B -> B -> Prop} (hR : RealizableProbability R) : ProbTransitive R := by
  rcases hR with <?, -, hrep>
  intro x y z hxy hyz
  exact (hrep x z).2 (((hrep y z).1 hyz).trans ((hrep x y).1 hxy))

theorem RealizableProbability.disjointUnionInvariant {B : Type u} [BooleanAlgebra B]
  {R : B -> B -> Prop} (hR : RealizableProbability R) :
  ProbDisjointUnionInvariant R := by
  rcases hR with <?, h?, hrep>
  intro x y z hzx hzy

```

```

    rw [hrep x y, hrep (x sqsup z) (y sqsup z)]
    rw [h?.additive x z hzx.symm, h?.additive y z hzy.symm]
    constructor <;> intro h <;> linarith
end Scott1964.MeasurementStructures

```

A.15 Scott1964/MeasurementStructures/Probability/Atoms.lean

213 lines.

Lean 4 source

```

import Mathlib.Order.Atoms
import Scott1964.MeasurementStructures.Probability.Basic

/-!
# Atom vectors for finite Boolean algebras

Scott identifies an event with its `0`/`1` characteristic vector on the atoms.
The cancellation identity in Theorem 4.1 is equality of sums of these vectors.
-/

namespace Scott1964.MeasurementStructures

open scoped BigOperators Classical

noncomputable section

/-- The real characteristic vector of an event on Boolean atoms. -/
def atomVector {B : Type u} [BooleanAlgebra B] (x : B) :
  {a : B // IsAtom a} -> ? :=
  fun a |>-> if (a : B) <= x then 1 else 0

@[simp]
theorem atomVector_apply {B : Type u} [BooleanAlgebra B] (x : B)
  (a : {a : B // IsAtom a}) :
  atomVector x a = if (a : B) <= x then 1 else 0 :=
  rfl

theorem atomVector_bot {B : Type u} [BooleanAlgebra B] :
  atomVector (False : B) = 0 := by
  funext a
  simp [atomVector, a.property.1]

theorem atomVector_top {B : Type u} [BooleanAlgebra B] :
  atomVector (top : B) = 1 := by
  funext a
  simp [atomVector]

theorem atomVector_sup_of_disjoint {B : Type u} [BooleanAlgebra B]
  {x y : B} (hxy : Disjoint x y) :
  atomVector (x sqsup y) = atomVector x + atomVector y := by
  funext a
  have hatom := a.property
  by_cases hx : (a : B) <= x
  * have hny : not (a : B) <= y := by
    intro hy
    have : (a : B) <= x sqcap y := le_inf hx hy
    rw [hxy.eq_bot] at this
    exact hatom.1 (bot_unique this)
  have hsup : (a : B) <= x sqsup y := hx.trans le_sup_left
  simp [atomVector, hx, hny, hsup]

```

```

* by_cases hy : (a : B) <= y
* have hsup : (a : B) <= x sqsup y := hy.trans le_sup_right
  simp [atomVector, hx, hy, hsup]
* have hsup : not (a : B) <= x sqsup y := by
  intro ha
  have hix : (a : B) sqcap x = False := by
    rcases hatom.le_iff.mp inf_le_left with hbot | heq
    * exact hbot
    * exact False.elim (hx (by rw [ <- heq]; exact inf_le_right))
  have hiy : (a : B) sqcap y = False := by
    rcases hatom.le_iff.mp inf_le_left with hbot | heq
    * exact hbot
    * exact False.elim (hy (by rw [ <- heq]; exact inf_le_right))
  have haeq : (a : B) sqcap (x sqsup y) = a := inf_eq_left.mpr ha
  rw [inf_sup_left, hix, hiy, bot_sup_eq] at haeq
  exact hatom.1 haeq.symm
  simp [atomVector, hx, hy, hsup]

theorem atomVector_injective {B : Type u} [BooleanAlgebra B] [Fintype B] :
  Function.Injective (atomVector : B -> ({a : B // IsAtom a} -> ?)) := by
  let _ : IsAtomic B := isAtomic_of_orderBot_wellFounded_lt wellFounded_lt
  intro x y hxy
  apply BooleanAlgebra.eq_iff_atom_le_iff.mpr
  intro a ha
  have h := congrFun hxy <a, ha>
  simp only [atomVector_apply] at h
  constructor <;> intro hle
  * by_contra hn
    simp [hle, hn] at h
  * by_contra hn
    simp [hle, hn] at h

/-- Distinct Boolean atoms are disjoint. -/
theorem disjoint_atoms_of_ne {B : Type u} [BooleanAlgebra B]
  (a b : {a : B // IsAtom a}) (hab : a != b) :
  Disjoint (a : B) b := by
  rw [disjoint_iff_inf_le]
  rcases a.property.le_iff.mp inf_le_left with hbot | heq
  * exact le_of_eq hbot
  * have hab_le : (a : B) <= b := by
    rw [ <- heq]
    exact inf_le_right
  rcases b.property.le_iff.mp hab_le with ha0 | heqab
  * exact False.elim (a.property.1 ha0)
  * exact False.elim (hab (Subtype.ext heqab))

theorem disjoint_atom_finset_sup {B : Type u} [BooleanAlgebra B]
  (a : {a : B // IsAtom a}) (s : Finset {a : B // IsAtom a})
  (ha : a notin s) :
  Disjoint (a : B) (s.sup fun b |-> (b : B)) := by
  induction s using Finset.induction_on with
  | empty => simp
  | @insert b s hb ih =>
    rw [Finset.sup_insert]
    exact (disjoint_sup_right).2
      <disjoint_atoms_of_ne a b (by
        intro hab
        subst b
        exact ha (Finset.mem_insert_self _ _)),
        ih (fun has |-> ha (Finset.mem_insert_of_mem has))>

/-- A signed charge evaluates a supremum of distinct atoms as the sum of
their charges. -/

```

```

theorem IsSignedCharge.finset_sup_atoms
  {B : Type u} [BooleanAlgebra B] {? : B → ?}
  (h? : IsSignedCharge ?) (s : Finset {a : B // IsAtom a}) :
  ? (s.sup fun a |→ (a : B)) = ? a in s, ? a := by
  induction s using Finset.induction_on with
  | empty => simp [h?.bot]
  | @insert a s ha ih =>
    rw [Finset.sup_insert, h?.additive _ _ (disjoint_atom_finset_sup a s ha),
      Finset.sum_insert ha, ih]

/-- Finite additivity evaluates a supremum of distinct atoms as the sum of
their masses. -/
theorem IsProbability.finset_sup_atoms
  {B : Type u} [BooleanAlgebra B] {? : B → ?}
  (h? : IsProbability ?) (s : Finset {a : B // IsAtom a}) :
  ? (s.sup fun a |→ (a : B)) = ? a in s, ? a := by
  induction s using Finset.induction_on with
  | empty => simp [h?.bot]
  | @insert a s ha ih =>
    rw [Finset.sup_insert, h?.additive _ _ (disjoint_atom_finset_sup a s ha),
      Finset.sum_insert ha, ih]

/-- The atoms below an event. -/
def atomsBelow {B : Type u} [BooleanAlgebra B] [Fintype B] (x : B) :
  Finset {a : B // IsAtom a} :=
  Finset.univ.filter fun a |→ (a : B) ≤ x

theorem sup_atomsBelow {B : Type u} [BooleanAlgebra B] [Fintype B] (x : B) :
  (atomsBelow x).sup (fun a |→ (a : B)) = x := by
  let _ : IsAtomic B := isAtomic_of_orderBot_wellFounded_lt wellFounded_lt
  apply BooleanAlgebra.eq_iff_atom_le_iff.mpr
  intro a ha
  constructor
  * intro h
    exact h.trans (Finset.sup_le fun b hb |→
      (Finset.mem_filter.mp hb).2)
  * intro h
    exact Finset.le_sup (f := fun b : {a : B // IsAtom a} |→ (b : B))
      (show <a, ha> in atomsBelow x by simp [atomsBelow, h])

/-- Every finitely additive signed charge is the sum of its atom charges. -/
theorem IsSignedCharge.eq_sum_atoms
  {B : Type u} [BooleanAlgebra B] [Fintype B] {? : B → ?}
  (h? : IsSignedCharge ?) (x : B) :
  ? x = ? a in atomsBelow x, ? a := by
  calc
  ? x = ? ((atomsBelow x).sup fun a |→ (a : B)) := by
    rw [sup_atomsBelow]
  _ = ? a in atomsBelow x, ? a := h?.finset_sup_atoms (atomsBelow x)

/-- Every finitely additive probability is the sum of its atom masses. -/
theorem IsProbability.eq_sum_atoms
  {B : Type u} [BooleanAlgebra B] [Fintype B] {? : B → ?}
  (h? : IsProbability ?) (x : B) :
  ? x = ? a in atomsBelow x, ? a := by
  calc
  ? x = ? ((atomsBelow x).sup fun a |→ (a : B)) := by
    rw [sup_atomsBelow]
  _ = ? a in atomsBelow x, ? a := h?.finset_sup_atoms (atomsBelow x)

/-- Pointwise equality of sums of event vectors is exactly Scott's
atom-count identity. -/
theorem sum_atomVector_eq_iff {B : Type u} [BooleanAlgebra B]

```

```

(n : Nat) (x y : Fin n -> B) :
(? i, atomVector (x i)) = ? i, atomVector (y i) <->
  forall a : B, IsAtom a ->
    (? i, if a <= x i then 1 else 0) =
      (? i, if a <= y i then 1 else 0 : Nat) := by
constructor
* intro h a ha
  have haeq := congrFun h <a, ha>
  simp only [Finset.sum_apply, atomVector_apply] at haeq
  exact_mod_cast haeq
* intro h
  funext a
  simp only [Finset.sum_apply, atomVector_apply]
  exact_mod_cast h a a.property

/-- Scott 1964, literal condition `(4_B)`: cancellation is stated using
equality of sums of the characteristic vectors themselves. -/
def ProbVectorCancellation {B : Type u} [BooleanAlgebra B]
  (R : B -> B -> Prop) : Prop :=
  forall (n : Nat) (x y : Fin (n + 1) -> B),
    (? i, atomVector (x i)) = ? i, atomVector (y i) ->
      (forall i, i != 0 -> R (x i) (y i)) -> R (y 0) (x 0)

/-- The literal vector-sum and atom-count formulations of `(4_B)` agree. -/
theorem probVectorCancellation_iff_probCancellation
  {B : Type u} [BooleanAlgebra B] [Fintype B]
  {R : B -> B -> Prop} :
  ProbVectorCancellation R <-> ProbCancellation R := by
constructor
* intro h n x y hcount hweak
  exact h n x y ((sum_atomVector_eq_iff (n + 1) x y).2 hcount) hweak
* intro h n x y hsum hweak
  exact h n x y ((sum_atomVector_eq_iff (n + 1) x y).1 hsum) hweak
end

end Scott1964.MeasurementStructures

```

A.16 Scott1964/MeasurementStructures/Probability/Finite.lean

463 lines.

Lean 4 source (lines 1–400)

```

import Scott1964.MeasurementStructures.Probability.Atoms
import Scott1964.MeasurementStructures.LinearInequalities.ScottTheorems

/-!
# Finite qualitative probability

This file isolates the last step of Scott's proof: a separating functional on
atom vectors is normalized to a finitely additive probability.
-/

namespace Scott1964.MeasurementStructures

open scoped BigOperators Classical

noncomputable section

open LinearInequalities

/-- Linear-functional representation of a qualitative relation on event

```

```

characteristic vectors. -/
def AtomLinearRepresentation {B : Type u} [BooleanAlgebra B]
  (R : B → B → Prop) : Prop :=
  exists phi : ({a : B // IsAtom a} → ?) → ?[?] ?,
  forall x y, R x y <=> phi (atomVector x) >= phi (atomVector y)

/-- Integration of atom vectors against the atom masses of a finite
probability. -/
def atomWeightFunctional {B : Type u} [BooleanAlgebra B] [Fintype B]
  (? : B → ?) : ({a : B // IsAtom a} → ?) → ?[?] ? where
  toFun v := ? a, v a * ? a
  map_add' u v := by
    simp only [Pi.add_apply, add_mul, Finset.sum_add_distrib]
  map_smul' c v := by
    simp only [Pi.smul_apply, smul_eq_mul, RingHom.id_apply]
    symm
    rw [Finset.mul_sum]
    apply Finset.sum_congr rfl
    intro a ha
    ring

@[simp]
theorem atomWeightFunctional_apply
  {B : Type u} [BooleanAlgebra B] [Fintype B] (? : B → ?)
  (v : {a : B // IsAtom a} → ?) :
  atomWeightFunctional ? v = ? a, v a * ? a :=
  rfl

theorem atomWeightFunctional_atomVector
  {B : Type u} [BooleanAlgebra B] [Fintype B]
  {? : B → ?} (h? : IsProbability ?) (x : B) :
  atomWeightFunctional ? (atomVector x) = ? x := by
  rw [h?.eq_sum_atoms x]
  simp only [atomWeightFunctional_apply, atomVector_apply, atomsBelow]
  rw [Finset.sum_filter]
  apply Finset.sum_congr rfl
  intro a ha
  by_cases hax : (a : B) <= x <;> simp [hax]

/-- Atom-weight integration also recovers an arbitrary signed charge. -/
theorem atomWeightFunctional_atomVector_signed
  {B : Type u} [BooleanAlgebra B] [Fintype B]
  {? : B → ?} (h? : IsSignedCharge ?) (x : B) :
  atomWeightFunctional ? (atomVector x) = ? x := by
  rw [h?.eq_sum_atoms x]
  simp only [atomWeightFunctional_apply, atomVector_apply, atomsBelow]
  rw [Finset.sum_filter]
  apply Finset.sum_congr rfl
  intro a ha
  by_cases hax : (a : B) <= x <;> simp [hax]

theorem RealizableProbability.atomLinearRepresentation
  {B : Type u} [BooleanAlgebra B] [Fintype B]
  {R : B → B → Prop} (hR : RealizableProbability R) :
  AtomLinearRepresentation R := by
  rcases hR with <?, h?, hrep>
  refine <atomWeightFunctional ?, ?_>
  intro x y
  rw [atomWeightFunctional_atomVector h?,
    atomWeightFunctional_atomVector h?]
  exact hrep x y

theorem RealizableSignedCharge.atomLinearRepresentation

```

```

    {B : Type u} [BooleanAlgebra B] [Fintype B]
    {R : B -> B -> Prop} (hR : RealizableSignedCharge R) :
    AtomLinearRepresentation R := by
rcases hR with <?, h?, hrep>
refine <atomWeightFunctional ?, ?_>
intro x y
rw [atomWeightFunctional_atomVector_signed h?,
    atomWeightFunctional_atomVector_signed h?]
exact hrep x y

/-- A linear representation on atom vectors induces a signed charge directly.
No division by the charge of `top` is needed. -/
theorem signedCharge_of_atomLinearRepresentation
  {B : Type u} [BooleanAlgebra B] {R : B -> B -> Prop}
  (hR : AtomLinearRepresentation R) :
  RealizableSignedCharge R := by
rcases hR with <phi, hrep>
let ? : B -> ? := fun x |> phi (atomVector x)
refine <?, ?_, ?_>
* refine <?_, ?_>
* simp [?, atomVector_bot]
* intro x y hxy
  simp only [?, atomVector_sup_of_disjoint hxy, map_add]
* exact hrep

/-- A nondegenerate atom-functional representation normalizes to a finitely
additive probability without changing any comparisons. -/
theorem probability_of_atomLinearRepresentation {B : Type u} [BooleanAlgebra B]
  {R : B -> B -> Prop}
  (hR : AtomLinearRepresentation R)
  (hnt : ProbNontrivial R) (hn : ProbNonneg R) :
  RealizableProbability R := by
rcases hR with <phi, hrep>
have hbot : phi (atomVector (False : B)) = 0 := by rw [atomVector_bot, map_zero]
have htop : phi (atomVector (top : B)) > 0 := by
  have hge := (hrep top False).1 hnt.1
  have hnle := fun h |> hnt.2 ((hrep False top).2 h)
  rw [hbot] at hge hnle
  exact lt_of_not_ge hnle
let ? : B -> ? := fun x |> phi (atomVector x) / phi (atomVector (top : B))
refine <?, ?_, ?_>
* refine <?_, ?_, ?_, ?_>
* simp [?, atomVector_bot]
* simp [?, ne_of_gt htop]
* intro x y hxy
  change phi (atomVector (x sqsup y)) / phi (atomVector (top : B)) =
    phi (atomVector x) / phi (atomVector (top : B)) +
    phi (atomVector y) / phi (atomVector (top : B))
  rw [atomVector_sup_of_disjoint hxy, map_add, add_div]
* intro x
  have hx := (hrep x False).1 (hn x)
  rw [hbot] at hx
  exact div_nonneg hx htop.le
* intro x y
  rw [hrep]
  change phi (atomVector y) <= phi (atomVector x) <->
    phi (atomVector y) / phi (atomVector (top : B)) <=
    phi (atomVector x) / phi (atomVector (top : B))
  exact (div_le_div_iff_of_pos_right htop).symm

/-- Condition `(2_B)` makes the normalized signed measure nonnegative. -/
theorem nonnegative_probability_of_atomLinearRepresentation
  {B : Type u} [BooleanAlgebra B] {R : B -> B -> Prop}

```

```

(hR : AtomLinearRepresentation R) (hnt : ProbNontrivial R)
(hn : ProbNonneg R) :
exists ? : B -> ?, IsFinitelyAdditiveProbability ? /\
  forall x y, R x y <=> ? x >= ? y :=
probability_of_atomLinearRepresentation hR hnt hn

/-- Every atom-functional representation satisfies Scott's cancellation
scheme. This is the easy direction of the finite separation theorem. -/
theorem AtomLinearRepresentation.cancellation
  {B : Type u} [BooleanAlgebra B] [Fintype B]
  {R : B -> B -> Prop} (hR : AtomLinearRepresentation R) :
  forall (n : Nat) (x y : Fin (n + 1) -> B),
    (forall a : B, IsAtom a ->
      (? i, if a <= x i then 1 else 0) =
        (? i, if a <= y i then 1 else 0 : Nat)) ->
      (forall i, i != finHead n -> R (x i) (y i)) ->
        R (y (finHead n)) (x (finHead n)) := by
  rcases hR with <phi, hrep>
  intro n x y hcount hweak
  have hvectors :
    (? i, atomVector (x i)) = ? i, atomVector (y i) :=
    (sum_atomVector_eq_iff (n + 1) x y).2 hcount
  have hsums :
    ? i, phi (atomVector (x i)) = ? i, phi (atomVector (y i)) := by
    simpa only [map_sum] using congrArg phi hvectors
  have hrest :
    ? i in (Finset.univ.erase (finHead n)),
      phi (atomVector (y i)) <=
    ? i in (Finset.univ.erase (finHead n)),
      phi (atomVector (x i)) := by
    apply Finset.sum_le_sum
    intro i hi
    have hi0 : i != finHead n := by simpa using (Finset.mem_erase.mp hi).1
    exact (hrep (x i) (y i)).1 (hweak i hi0)
  apply (hrep (y (finHead n)) (x (finHead n))).2
  have hzero : finHead n in Finset.univ := Finset.mem_univ _
  have hx := Finset.sum_erase_add _ (fun i |>-> phi (atomVector (x i))) hzero
  have hy := Finset.sum_erase_add _ (fun i |>-> phi (atomVector (y i))) hzero
  linarith

theorem AtomLinearRepresentation.probCancellation
  {B : Type u} [BooleanAlgebra B] [Fintype B]
  {R : B -> B -> Prop} (hR : AtomLinearRepresentation R) :
  ProbCancellation R :=
  hR.cancellation

/-- The atom-count formulation can equivalently be supplied as an equality
of sums of characteristic vectors. -/
theorem ProbCancellation.of_atomVector_sum
  {B : Type u} [BooleanAlgebra B] [Fintype B]
  {R : B -> B -> Prop} (hR : ProbCancellation R)
  (n : Nat) (x y : Fin (n + 1) -> B)
  (hsum : (? i, atomVector (x i)) = ? i, atomVector (y i))
  (hweak : forall i, i != finHead n -> R (x i) (y i)) :
  R (y (finHead n)) (x (finHead n)) :=
  hR n x y ((sum_atomVector_eq_iff (n + 1) x y).1 hsum) hweak

/-- Scott cancellation alone implies reflexivity. -/
theorem ProbCancellation.refl
  {B : Type u} [BooleanAlgebra B] [Fintype B]
  {R : B -> B -> Prop} (hR : ProbCancellation R) (x : B) :
  R x x := by
  apply hR.of_atomVector_sum 0 (fun _ |>-> x) (fun _ |>-> x)

```

```

* rfl
* intro i hi
  exact False.elim (hi (by simp [finHead_eq_zero] using Fin.eq_zero i))

/-- Scott cancellation implies de Finetti transitivity. -/
theorem ProbCancellation.transitive
  {B : Type u} [BooleanAlgebra B] [Fintype B]
  {R : B → B → Prop} (hR : ProbCancellation R) :
  ProbTransitive R := by
  intro x y z hxy hyz
  let xs : Fin 3 → B := ![z, x, y]
  let ys : Fin 3 → B := ![x, y, z]
  apply hR.of_atomVector_sum 2 xs ys
  * simp [xs, ys, Fin.sum_univ_succ]
  abel
* intro i hi
  fin_cases i
  * exact False.elim (hi (finHead_eq_zero _).symm)
  * exact hxy
  * exact hyz

/-- Scott cancellation gives both directions of de Finetti's invariance
under adjoining a common disjoint event. -/
theorem ProbCancellation.disjointUnionInvariant
  {B : Type u} [BooleanAlgebra B] [Fintype B]
  {R : B → B → Prop} (hR : ProbCancellation R) :
  ProbDisjointUnionInvariant R := by
  intro x y z hzx hzy
  have hxz : atomVector (x sqsup z) = atomVector x + atomVector z :=
    atomVector_sup_of_disjoint hzx.symm
  have hyz : atomVector (y sqsup z) = atomVector y + atomVector z :=
    atomVector_sup_of_disjoint hzy.symm
  constructor
  * intro hxy
    let xs : Fin 2 → B := ![y sqsup z, x]
    let ys : Fin 2 → B := ![x sqsup z, y]
    apply hR.of_atomVector_sum 1 xs ys
    * simp [xs, ys, Fin.sum_univ_succ, hxz, hyz]
    abel
  * intro i hi
    fin_cases i
    * exact False.elim (hi (finHead_eq_zero _).symm)
    * exact hxy
  * intro hxy
    let xs : Fin 2 → B := ![y, x sqsup z]
    let ys : Fin 2 → B := ![x, y sqsup z]
    apply hR.of_atomVector_sum 1 xs ys
    * simp [xs, ys, Fin.sum_univ_succ, hxz, hyz]
    abel
  * intro i hi
    fin_cases i
    * exact False.elim (hi (finHead_eq_zero _).symm)
    * exact hxy

/-! ## Reduction to Scott's explicit S1 relation theorem -/

/-- The event represented by an atom vector in the range of `atomVector`.
Outside that range its value is immaterial. -/
def eventOfAtomVector {B : Type u} [BooleanAlgebra B]
  (v : {a : B // IsAtom a} → ?) : B :=
  if h : exists x, atomVector x = v then Classical.choose h else False

```

@[simp]

```

theorem eventOfAtomVector_atomVector
  {B : Type u} [BooleanAlgebra B] [Fintype B] (x : B) :
    eventOfAtomVector (atomVector x) = x := by
  unfold eventOfAtomVector
  split
  * rename_i h
    exact atomVector_injective (Classical.choose_spec h)
  * rename_i h
    exact False.elim (h <x, rfl>)

/-- The relation transported from events to their characteristic vectors. -/
def AtomVectorRelation {B : Type u} [BooleanAlgebra B]
  (R : B → B → Prop)
  (u v : {a : B // IsAtom a} → ?) : Prop :=
  R (eventOfAtomVector u) (eventOfAtomVector v)

@[simp]
theorem atomVectorRelation_atomVectors
  {B : Type u} [BooleanAlgebra B] [Fintype B]
  (R : B → B → Prop) (x y : B) :
    AtomVectorRelation R (atomVector x) (atomVector y) <=> R x y := by
  simp [AtomVectorRelation]

theorem atomVector_range_finite
  {B : Type u} [BooleanAlgebra B] [Fintype B] :
    (Set.range (atomVector :
      B → ({a : B // IsAtom a} → ?))).Finite :=
  Set.finite_range _

theorem atomVector_range_rational
  {B : Type u} [BooleanAlgebra B] :
    IsRationalSet (Set.range (atomVector :
      B → ({a : B // IsAtom a} → ?))) := by
  rintro v <x, rfl> a
  by_cases h : (a : B) <= x
  * exact <1, by simp [atomVector, h]>
  * exact <0, by simp [atomVector, h]>

theorem atomVectorRelation_complete
  {B : Type u} [BooleanAlgebra B] [Fintype B]
  {R : B → B → Prop} (hR : ProbTotal R) :
    RelationComplete
      (Set.range (atomVector :
        B → ({a : B // IsAtom a} → ?)))
      (AtomVectorRelation R) := by
  rintro u <x, rfl> v <y, rfl>
  simpa only [atomVectorRelation_atomVectors] using hR x y

theorem atomVectorRelation_sequenceCancellation
  {B : Type u} [BooleanAlgebra B] [Fintype B]
  {R : B → B → Prop} (hR : ProbCancellation R) :
    RelationSequenceCancellation
      (Set.range (atomVector :
        B → ({a : B // IsAtom a} → ?)))
      (AtomVectorRelation R) := by
  intro n u v hu hv huv hsum j
  let e : Equiv.Perm (Fin (n + 1)) := Equiv.swap (finHead n) j
  let x : Fin (n + 1) → B := fun i |> eventOfAtomVector (u (e i))
  let y : Fin (n + 1) → B := fun i |> eventOfAtomVector (v (e i))
  have hxu : forall i, atomVector (x i) = u (e i) := by
    intro i
    rcases hu (e i) with <xi, hxi>
    change atomVector (eventOfAtomVector (u (e i))) = u (e i)

```

```

    rw [ <- hxi]
    simp
  have hyv : forall i, atomVector (y i) = v (e i) := by
    intro i
    rcases hv (e i) with <yi, hyi>
    change atomVector (eventOfAtomVector (v (e i))) = v (e i)
    rw [ <- hyi]
    simp
  change R (eventOfAtomVector (v j)) (eventOfAtomVector (u j))
  apply hR.of_atomVector_sum n x y
  * simp only [hxu, hyv]
  rw [Equiv.sum_comp e, Equiv.sum_comp e, hsum]
  * intro i hi
  change R (eventOfAtomVector (u (e i))) (eventOfAtomVector (v (e i)))
  exact huv (e i)

theorem atomLinearRepresentation_of_relationRealizable
  {B : Type u} [BooleanAlgebra B] [Fintype B]
  {R : B -> B -> Prop}
  (hreal : RelationRealizable
    (Set.range (atomVector :
      B -> ({a : B // IsAtom a} -> ?)))
    (AtomVectorRelation R)) :
  AtomLinearRepresentation R := by
  rcases hreal with <phi, hphi>
  refine <phi, ?_>
  intro x y
  simp only [atomVectorRelation_atomVectors] using
    hphi (atomVector x) (Set.mem_range_self x)
    (atomVector y) (Set.mem_range_self y)

/-- Scott's `(3_B)` and `(4_B)` produce a linear representation on atom
vectors, without any positivity or nondegeneracy assumptions. -/
theorem atomLinearRepresentation_of_total_cancellation
  {B : Type u} [BooleanAlgebra B] [Fintype B]
  {R : B -> B -> Prop}
  (htotal : ProbTotal R) (hcancel : ProbCancellation R) :
  AtomLinearRepresentation R := by
  have hreal : RelationRealizable
    (Set.range (atomVector :
      B -> ({a : B // IsAtom a} -> ?)))
    (AtomVectorRelation R) :=
    (scott_theorem_1_3 atomVector_range_finite atomVector_range_rational).2
    <atomVectorRelation_complete htotal,
      atomVectorRelation_sequenceCancellation hcancel>
  exact atomLinearRepresentation_of_relationRealizable hreal

theorem RealizableProbability.probCancellation
  {B : Type u} [BooleanAlgebra B] [Fintype B]
  {R : B -> B -> Prop} (hR : RealizableProbability R) :
  ProbCancellation R :=
  hR.atomLinearRepresentation.probCancellation

theorem RealizableProbability.finiteNecessary
  {B : Type u} [BooleanAlgebra B] [Fintype B]
  {R : B -> B -> Prop} (hR : RealizableProbability R) :
  ProbNontrivial R /\ ProbNonneg R /\ ProbTotal R /\ ProbCancellation R :=
  <hR.probNontrivial, hR.probNonneg, hR.probTotal, hR.probCancellation>

theorem RealizableSignedCharge.finiteNecessary
  {B : Type u} [BooleanAlgebra B] [Fintype B]
  {R : B -> B -> Prop} (hR : RealizableSignedCharge R) :
  ProbTotal R /\ ProbCancellation R := by

```

```

have hlin := hR.atomLinearRepresentation
constructor
* rcases hlin with <phi, hrep>

```

Lean 4 source (lines 401–463)

```

intro x y
exact (le_total (phi (atomVector y)) (phi (atomVector x))).imp
((hrep x y).2) ((hrep y x).2)
* exact hlin.probCancellation

/-- Scott's p.15 signed-measure claim: `(3_B)` and `(4_B)` are exactly the
conditions for representation by a finitely additive signed charge. -/
theorem scott_p15_signed_charge
  {B : Type u} [BooleanAlgebra B] [Fintype B]
  (R : B -> B -> Prop) :
  RealizableSignedCharge R <=> ProbTotal R /\ ProbCancellation R := by
  constructor
  * exact RealizableSignedCharge.finiteNecessary
  * rintro <htotal, hcancel>
  exact signedCharge_of_atomLinearRepresentation
    (atomLinearRepresentation_of_total_cancellation htotal hcancel)

/-- Scott's p.15 claim with literal vector-sum cancellation `(4_B)`. -/
theorem scott_p15_signed_charge_vector
  {B : Type u} [BooleanAlgebra B] [Fintype B]
  (R : B -> B -> Prop) :
  RealizableSignedCharge R <=> ProbTotal R /\ ProbVectorCancellation R := by
  rw [scott_p15_signed_charge,
    probVectorCancellation_iff_probCancellation]

theorem probability_of_finite_axioms
  {B : Type u} [BooleanAlgebra B] [Fintype B]
  {R : B -> B -> Prop}
  (hnt : ProbNontrivial R) (hn : ProbNonneg R)
  (htotal : ProbTotal R) (hcancel : ProbCancellation R) :
  RealizableProbability R := by
  have hreal : RelationRealizable
    (Set.range (atomVector :
      B -> ({a : B // IsAtom a} -> ?)))
    (AtomVectorRelation R) :=
    (scott_theorem_1_3 atomVector_range_finite atomVector_range_rational).2
    <atomVectorRelation_complete htotal,
      atomVectorRelation_sequenceCancellation hcancel>
  exact probability_of_atomLinearRepresentation
    (atomLinearRepresentation_of_relationRealizable hreal) hnt hn

/-- **Scott 1964, Theorem 4.1 (subjective probability).** -/
theorem theorem_4_1 {B : Type u} [BooleanAlgebra B] [Fintype B]
  (R : B -> B -> Prop) :
  RealizableProbability R <=>
    ProbNontrivial R /\ ProbNonneg R /\ ProbTotal R /\ ProbCancellation R := by
  constructor
  * exact RealizableProbability.finiteNecessary
  * rintro <hnt, hn, htotal, hcancel>
  exact probability_of_finite_axioms hnt hn htotal hcancel

/-- **Scott 1964, Theorem 4.1**, with `(4_B)` stated literally as equality
of sums of atom vectors. -/
theorem theorem_4_1_vector {B : Type u} [BooleanAlgebra B] [Fintype B]
  (R : B -> B -> Prop) :
  RealizableProbability R <=>
    ProbNontrivial R /\ ProbNonneg R /\ ProbTotal R /\
    ProbVectorCancellation R := by

```

```

    rw [theorem_4_1, probVectorCancellation_iff_probCancellation]

end

end Scott1964.MeasurementStructures

```

A.17 Scott1964/MeasurementStructures/Probability/KPSCounterexample.lean

238 lines.

Lean 4 source

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/

import Scott1964.MeasurementStructures.Probability.Finite

/-!
# The Kraft-Pratt-Seidenberg five-atom counterexample

This file formalizes the simple ordering displayed in Section 4 of
Kraft-Pratt-Seidenberg, *Intuitive Probability on Finite Sets* (1959).
The five atoms `p q r s t` are represented by `0 1 2 3 4 : Fin 5`.

The rank table below is the paper's displayed order, from the empty event
through the full event. Its four decisive comparisons are

`qs < p`, `pq < rs`, `ps < tq`, and `rt < spq`.

The finite de Finetti properties are checked by evaluating all events.
The non-representability argument itself is symbolic: finite additivity
turns the four strict event comparisons into four incompatible linear
inequalities between singleton weights.
-/

namespace Scott1964.MeasurementStructures.Probability.KPSCounterexample

abbrev Atom := Fin 5
abbrev Event := Finset Atom

def p : Atom := 0
def q : Atom := 1
def r : Atom := 2
def s : Atom := 3
def t : Atom := 4

/-- Binary code for an event, with `p q r s t` as bits `0 1 2 3 4`. -/
def eventCode (A : Event) : Nat :=
  ? i in A, 2 ^ i.val

/-- Position in the strict 32-event order printed by KPS. -/
def kpsRank (A : Event) : Nat :=
  match eventCode A with
  | 0 => 0 -- 1 (the empty event)
  | 2 => 1 -- q
  | 4 => 2 -- r
  | 8 => 3 -- s
  | 6 => 4 -- qr
  | 10 => 5 -- qs
  | 1 => 6 -- p

```

```

| 3 => 7 -- pq
| 12 => 8 -- rs
| 16 => 9 -- t
| 14 => 10 -- qrs
| 5 => 11 -- rp
| 9 => 12 -- ps
| 18 => 13 -- tq
| 7 => 14 -- qrp
| 20 => 15 -- rt
| 11 => 16 -- spq
| 24 => 17 -- st
| 13 => 18 -- rsp
| 22 => 19 -- qrt
| 26 => 20 -- qst
| 17 => 21 -- pt
| 15 => 22 -- qrsp
| 19 => 23 -- qpt
| 28 => 24 -- rst
| 30 => 25 -- qrst
| 21 => 26 -- rpt
| 25 => 27 -- spt
| 23 => 28 -- qrpt
| 27 => 29 -- qspt
| 29 => 30 -- rspt
| 31 => 31 -- pqrst
| _ => 0 -- unreachable for an event on five atoms

def KPSLe (A B : Event) : Prop := kpsRank A <= kpsRank B
def KPSLt (A B : Event) : Prop := kpsRank A < kpsRank B

/-- The KPS order oriented as ?at least as probable?, matching the shared
qualitative-probability API. -/
def KPSGe (A B : Event) : Prop := KPSLe B A

instance : DecidableRel KPSLe := by
  intro A B
  unfold KPSLe
  infer_instance

instance : DecidableRel KPSLt := by
  intro A B
  unfold KPSLt
  infer_instance

instance : DecidableRel KPSGe := by
  intro A B
  unfold KPSGe
  infer_instance

/-- The table gives distinct ranks to all 32 events. -/
theorem kpsRank_injective : Function.Injective kpsRank := by
  native_decide +revert

/-- Comparability (C). -/
theorem comparable (A B : Event) : KPSLe A B \ / KPSLe B A := by
  simp only [KPSLe]
  omega

/-- Transitivity (T). -/
theorem transitive {A B C : Event} :
  KPSLe A B -> KPSLe B C -> KPSLe A C := by
  simp only [KPSLe]
  omega

```

```

/-- The empty event is no more likely than every event. -/
theorem empty_le (A : Event) : KPSLe {} A := by
  native_decide +revert

/-- De Finetti's disjoint-union invariance (A), exhaustively verified. -/
theorem disjoint_union_invariance (A B C : Event)
  (hCA : Disjoint C A) (hCB : Disjoint C B) :
  KPSLe A B <-> KPSLe (A U C) (B U C) := by
  native_decide +revert

theorem qs_lt_p : KPSLt {q, s} {p} := by native_decide
theorem pq_lt_rs : KPSLt {p, q} {r, s} := by native_decide
theorem ps_lt_tq : KPSLt {p, s} {t, q} := by native_decide
theorem rt_lt_spq : KPSLt {r, t} {s, p, q} := by native_decide

/-- Finite additivity determines every event from its singleton values. -/
theorem measure_eq_sum_singletons {? : Event -> ?}
  (h? : IsProbability ?) (A : Event) :
  ? A = ? i in A, ? {i} := by
  classical
  induction A using Finset.induction_on with
  | empty =>
    simpa using h?.bot
  | @insert a A ha ih =>
    calc
      ? (insert a A) = ? ({a} U A) := by rw [Finset.singleton_union]
      _ = ? {a} + ? A := h?.additive _ _
      (Finset.disjoint_singleton_left.mpr ha)
      _ = ? {a} + ? i in A, ? {i} := by rw [ih]
      _ = ? i in insert a A, ? {i} := by simp [ha]

/-- Strict numerical representation of the KPS strict order. -/
def StrictlyRepresents (? : Event -> ?) : Prop :=
  forall A B, KPSLt A B <-> ? A < ? B

/--
No real finitely additive probability strictly represents the displayed
Kraft-Pratt-Seidenberg order.
-/
theorem no_strictly_representing_probability :
  not exists ? : Event -> ?,
  IsProbability ? /\ StrictlyRepresents ? := by
  rintro <?, h?, hrep>
  have h1 : ? {q, s} < ? {p} := (hrep _ _).mp qs_lt_p
  have h2 : ? {p, q} < ? {r, s} := (hrep _ _).mp pq_lt_rs
  have h3 : ? {p, s} < ? {t, q} := (hrep _ _).mp ps_lt_tq
  have h4 : ? {r, t} < ? {s, p, q} := (hrep _ _).mp rt_lt_spq
  rw [measure_eq_sum_singletons h?, measure_eq_sum_singletons h?] at h1
  rw [measure_eq_sum_singletons h?, measure_eq_sum_singletons h?] at h2
  rw [measure_eq_sum_singletons h?, measure_eq_sum_singletons h?] at h3
  rw [measure_eq_sum_singletons h?, measure_eq_sum_singletons h?] at h4
  simp [p, q, r, s, t] at h1 h2 h3 h4
  linarith

theorem kpsGe_nontrivial : not KPSGe (False : Event) top := by
  native_decide

theorem kpsGe_bottom (A : Event) : KPSGe A False :=
  empty_le A

theorem kpsGe_total : ProbTotal KPSGe := by
  intro A B

```

```

exact (comparable B A).imp id id

theorem kpsGe_transitive : ProbTransitive KPSGe := by
  intro A B C hAB hBC
  exact transitive hBC hAB

theorem kpsGe_disjointUnionInvariant :
  ProbDisjointUnionInvariant KPSGe := by
  intro A B C hCA hCB
  exact disjoint_union_invariance (A := B) (B := A) (C := C) hCB hCA

/-- The exact KPS order satisfies de Finetti's five axioms, with condition
(i) in its original weak form `not R False top`. -/
theorem kpsGe_deFinettiAxioms : DeFinettiAxioms KPSGe where
  nontrivial := kpsGe_nontrivial
  bottom := kpsGe_bottom
  total := kpsGe_total
  transitive := kpsGe_transitive
  disjointUnionInvariant := kpsGe_disjointUnionInvariant

theorem measure_strict_of_kpsLt {? : Event -> ?}
  (hrep : forall A B, KPSGe A B <-> ? A >= ? B)
  {A B : Event} (hAB : KPSLt A B) :
  ? A < ? B := by
  have hBA : KPSGe B A := by
    exact hAB.le
  have hnAB : not KPSGe A B := by
    simp only [KPSGe, KPSLe, KPSLt] at hAB |·
    omega
  have hle := (hrep B A).1 hBA
  have hnle : not ? A >= ? B := fun h |·> hnAB ((hrep A B).2 h)
  linarith

/-- No shared-API probability weakly represents the exact KPS ?at least as
probable? order. The contradiction uses the paper's four decisive
inequalities. -/
theorem not_realizableProbability_kpsGe :
  not RealizableProbability KPSGe := by
  rintro <?, h?, hrep>
  have h1 : ? {q, s} < ? {p} :=
    measure_strict_of_kpsLt hrep qs_lt_p
  have h2 : ? {p, q} < ? {r, s} :=
    measure_strict_of_kpsLt hrep pq_lt_rs
  have h3 : ? {p, s} < ? {t, q} :=
    measure_strict_of_kpsLt hrep ps_lt_tq
  have h4 : ? {r, t} < ? {s, p, q} :=
    measure_strict_of_kpsLt hrep rt_lt_spq
  rw [measure_eq_sum_singletons h?, measure_eq_sum_singletons h?] at h1
  rw [measure_eq_sum_singletons h?, measure_eq_sum_singletons h?] at h2
  rw [measure_eq_sum_singletons h?, measure_eq_sum_singletons h?] at h3
  rw [measure_eq_sum_singletons h?, measure_eq_sum_singletons h?] at h4
  simp [p, q, r, s, t] at h1 h2 h3 h4
  linarith

/-- De Finetti's five axioms are insufficient for finite additive-probability
representation. -/
theorem deFinetti_axioms_insufficient :
  DeFinettiAxioms KPSGe /\ not RealizableProbability KPSGe :=
  <kpsGe_deFinettiAxioms, not_realizableProbability_kpsGe>

end Scott1964.MeasurementStructures.Probability.KPSCounterexample

```

A.18 Scott1964/MeasurementStructures/Probability/Infinite/EventSpace.lean

412 lines.

Lean 4 source (lines 1–400)

```
/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/

import Scott1964.MeasurementStructures.Probability.Basic
import Mathlib.Order.PrimeSeparator
import Mathlib.Topology.Bornology.BoundedOperation
import Mathlib.Topology.ContinuousMap.Bounded.Basic

/-!
# Universal event spaces for an infinite Boolean algebra

This file supplies two complementary universal realizations of a Boolean algebra.

* `PrimePoint B` and `stoneIndicator` are the usual Stone representation by
  characteristic functions on prime ideals. This representation is faithful and is
  convenient for stating Scott's finite-sum cancellation condition.
* `ProbabilityPoint B` and `eventVector` evaluate an event at every finitely additive
  probability. Their real span is a normed order-unit space on which probabilities
  are exactly the point-evaluation positive normalized continuous linear functionals.

The second realization is used for the elementary, choice-free state correspondence
below. Constructing the analogous functional on the Stone-indicator span requires
the separate simple-function integration theorem for arbitrary finitely additive
charges.
-/

namespace Scott1964.MeasurementStructures.Probability.Infinite

open scoped BoundedContinuousFunction
open Set

noncomputable section

universe u

variable (B : Type u) [BooleanAlgebra B]

/-! ## The probability-evaluation event space -/

noncomputable instance instBoundedAddReal : BoundedAdd ? := inferInstance

/-- A point of the universal probability-evaluation space. -/
def ProbabilityPoint :=
  {? : B -> ? // IsFinitelyAdditiveProbability ?}

instance instTopologicalSpaceProbabilityPoint : TopologicalSpace (ProbabilityPoint B) := False

theorem probabilityPoint_discrete_eq_bot :
  instTopologicalSpaceProbabilityPoint B = False :=
  rfl

instance instDiscreteTopologyProbabilityPoint : DiscreteTopology (ProbabilityPoint B) where
  eq_bot := probabilityPoint_discrete_eq_bot B

noncomputable instance instAddCommMonoidProbabilityBCF :
```

```

AddCommMonoid (ProbabilityPoint B -> ? ?) := inferInstance

noncomputable instance instModuleProbabilityBCF :
  Module ? (ProbabilityPoint B -> ? ?) := inferInstance

noncomputable instance instAddCommGroupProbabilityBCF :
  AddCommGroup (ProbabilityPoint B -> ? ?) := inferInstance

theorem probabilityPoint_nonnegative (p : ProbabilityPoint B) (a : B) :
  0 <= p.1 a :=
  p.2.nonnegative a

theorem probabilityPoint_le_one (p : ProbabilityPoint B) (a : B) :
  p.1 a <= 1 :=
  p.2.le_one a

theorem eventVector_dist_le_one (a : B) (p q : ProbabilityPoint B) :
  dist (p.1 a) (q.1 a) <= 1 := by
  rw [Real.dist_eq, abs_sub_le_iff]
  constructor <,>
  linarith [probabilityPoint_nonnegative B p a,
    probabilityPoint_nonnegative B q a,
    probabilityPoint_le_one B p a,
    probabilityPoint_le_one B q a]

/-- The universal evaluation vector `? |-> ?(a)` of an event. -/
def eventVector (a : B) : ProbabilityPoint B -> ? ? :=
  BoundedContinuousFunction.mkOfDiscrete (fun p => p.1 a) 1
  (eventVector_dist_le_one B a)

/-- The real normed space generated by universal event-evaluation vectors. -/
def EventSpan : Submodule ? (ProbabilityPoint B -> ? ?) :=
  Submodule.span ? (Set.range (eventVector B))

noncomputable instance instNormedAddCommGroupEventSpan :
  NormedAddCommGroup (EventSpan B) := inferInstance

noncomputable instance instNormedSpaceEventSpan :
  NormedSpace ? (EventSpan B) := inferInstance

noncomputable instance instLocallyConvexSpaceEventSpan :
  LocallyConvexSpace ? (EventSpan B) := inferInstance

/-- The event vector as an element of `EventSpan`. -/
def event (a : B) : EventSpan B :=
  <eventVector B a, Submodule.subset_span (Set.mem_range_self a)>

/-! ## Stone points and indicator vectors -/

/-- A Stone point of `B`, presented as a prime (equivalently maximal) ideal. -/
structure PrimePoint where
  ideal : Order.Ideal B
  isPrime : ideal.IsPrime

instance : TopologicalSpace (PrimePoint B) := False

instance : DiscreteTopology (PrimePoint B) := <rfl>

/-- The `0`/`1` value of an event at a Stone point. -/
def stoneValue (a : B) (p : PrimePoint B) : ? :=
  @ite ? (a in p.ideal) (Classical.propDecidable (a in p.ideal)) 0 1

/-- The characteristic vector of an event on the Stone points of `B`.

```

```

The convention is that a point lies in the event `a` exactly when its prime ideal
does not contain `a`.
-/
def stoneIndicator (a : B) : PrimePoint B -> ? ? :=
  by
    classical
    exact BoundedContinuousFunction.mkOfDiscrete
      (stoneValue B a) 1 (by
        intro p q
        simp only [stoneValue, Real.dist_eq]
        split <;> split <;> norm_num)

@[simp]
theorem stoneIndicator_apply (a : B) (p : PrimePoint B) :
  stoneIndicator B a p = stoneValue B a p :=
  rfl

@[simp]
theorem stoneIndicator_bot : stoneIndicator B (False : B) = 0 := by
  classical
  ext p
  simp [stoneIndicator, stoneValue]

@[simp]
theorem stoneIndicator_top : stoneIndicator B (top : B) = 1 := by
  classical
  ext p
  have hp : (top : B) notin p.ideal := p.isPrime.toIsProper.top_notMem
  simp [stoneIndicator, stoneValue, hp]

@[simp]
theorem stoneIndicator_sup_of_disjoint {a b : B} (h : Disjoint a b) :
  stoneIndicator B (a sqsup b) = stoneIndicator B a + stoneIndicator B b := by
  classical
  ext p
  have hp := p.isPrime
  by_cases ha : a in p.ideal
  * by_cases hb : b in p.ideal
    * simp [stoneIndicator, stoneValue, ha, hb, Order.Ideal.sup_mem ha hb]
    * have hab : a sqsup b notin p.ideal := fun hs => hb (p.ideal.lower le_sup_right hs)
      simp [stoneIndicator, stoneValue, ha, hb, hab]
  * by_cases hb : b in p.ideal
    * have hab : a sqsup b notin p.ideal := fun hs => ha (p.ideal.lower le_sup_left hs)
      simp [stoneIndicator, stoneValue, ha, hb, hab]
    * have hab : a sqsup b notin p.ideal := fun hs => ha (p.ideal.lower le_sup_left hs)
      have hnotboth : not (a notin p.ideal /\ b notin p.ideal) := by
        intro hn
        have hi : a sqcap b in p.ideal := by
          rw [h.eq_bot]
          exact p.ideal.bot_mem
        exact (hp.mem_or_mem hi).elim hn.1 hn.2
      exact (hnotboth <ha, hb>).elim

/-- Stone indicators separate events, so the Stone representation is faithful. -/
theorem stoneIndicator_injective : Function.Injective (stoneIndicator B) := by
  classical
  intro a b hab
  apply le_antisymm
  * by_contra hle
    have hd : Disjoint
      ((Order.PFilter.principal a : Order.PFilter B) : Set B)
      ((Order.Ideal.principal b : Order.Ideal B) : Set B) := by

```

```

    rw [Set.disjoint_left]
    intro x hax hxb
    exact hle ((Order.PFilter.mem_principal.mp hax).trans
      (Order.Ideal.mem_principal.mp hxb))
  obtain <J, hJ, hbJ, hdis> :=
    DistribLattice.prime_ideal_of_disjoint_filter_ideal hd
  let p : PrimePoint B := <J, hJ>
  have hbin : b in J := hbJ Order.Ideal.mem_principal_self
  have hain : a notin J := by
    intro haJ
    exact Set.disjoint_left.mp hdis
    (show a in Order.PFilter.principal a by
      rw [Order.PFilter.mem_principal]) haJ
  have := congrArg (fun f : PrimePoint B -> ? ? => f p) hab
  simp [stoneIndicator, stoneValue, p, hbin, hain] at this
* by_contra hle
  have hd : Disjoint
    ((Order.PFilter.principal b : Order.PFilter B) : Set B)
    ((Order.Ideal.principal a : Order.Ideal B) : Set B) := by
    rw [Set.disjoint_left]
    intro x hbx hxa
    exact hle ((Order.PFilter.mem_principal.mp hbx).trans
      (Order.Ideal.mem_principal.mp hxa))
  obtain <J, hJ, haJ, hdis> :=
    DistribLattice.prime_ideal_of_disjoint_filter_ideal hd
  let p : PrimePoint B := <J, hJ>
  have hain : a in J := haJ Order.Ideal.mem_principal_self
  have hbin : b notin J := by
    intro hbJ
    exact Set.disjoint_left.mp hdis
    (show b in Order.PFilter.principal b by
      rw [Order.PFilter.mem_principal]) hbJ
  have := congrArg (fun f : PrimePoint B -> ? ? => f p) hab
  simp [stoneIndicator, stoneValue, p, hbin, hain] at this

/-- Equality of two finite sums of event indicators. -/
def IndicatorSumEqual {? : Type*} [Fintype ?] (x y : ? -> B) : Prop :=
  ? i, stoneIndicator B (x i) = ? i, stoneIndicator B (y i)

theorem indicatorSumEqual_iff {? : Type*} [Fintype ?] (x y : ? -> B) :
  IndicatorSumEqual B x y <=>
    forall p : PrimePoint B,
      ? i, stoneValue B (x i) p =
        ? i, stoneValue B (y i) p := by
  classical
  constructor
  * intro h p
    have := congrArg (fun f : PrimePoint B -> ? ? => f p) h
    simp [IndicatorSumEqual, stoneIndicator, stoneValue] using this
  * intro h
    apply BoundedContinuousFunction.ext
    intro p
    simp [IndicatorSumEqual, stoneIndicator, stoneValue] using h p

/-- The two-valued finitely additive probability associated with a Stone point. -/
def primeProbability (p : PrimePoint B) : ProbabilityPoint B := by
  refine <fun a => stoneValue B a p, ?_>
  refine
    { bot := by simp [stoneValue]
      top := by
        have hp : (top : B) notin p.ideal := p.isPrime.toIsProper.top_notMem
        simp [stoneValue, hp]
      additive := ?_

```

```

    nonnegative := ?_ }
*
  intro a b h
  have hs := congrArg (fun f : PrimePoint B -> ? ? => f p)
    (stoneIndicator_sup_of_disjoint B h)
  simp [stoneIndicator_apply] using hs
*
  intro a
  simp only [stoneValue]
  split <;> norm_num

@[simp]
theorem primeProbability_apply (p : PrimePoint B) (a : B) :
  (primeProbability B p).1 a = stoneValue B a p :=
  rfl

@[simp]
theorem eventVector_apply (a : B) (p : ProbabilityPoint B) :
  eventVector B a p = p.1 a :=
  rfl

@[simp]
theorem eventVector_bot : eventVector B (False : B) = 0 := by
  ext p
  exact p.2.bot

@[simp]
theorem eventVector_top : eventVector B (top : B) = 1 := by
  ext p
  exact p.2.top

@[simp]
theorem eventVector_sup_of_disjoint {a b : B} (h : Disjoint a b) :
  eventVector B (a sqsup b) = eventVector B a + eventVector B b := by
  ext p
  exact p.2.additive a b h

/-- Probability-evaluation vectors are also a faithful representation of events. -/
theorem eventVector_injective : Function.Injective (eventVector B) := by
  intro a b hab
  apply stoneIndicator_injective B
  ext p
  have h := congrArg (fun f : ProbabilityPoint B -> ? ? =>
    f (primeProbability B p)) hab
  exact h

@[simp]
theorem event_apply (a : B) (p : ProbabilityPoint B) :
  (event B a : ProbabilityPoint B -> ? ?) p = p.1 a :=
  rfl

@[simp]
theorem event_bot : event B (False : B) = 0 := by
  apply Subtype.ext
  exact eventVector_bot B

@[simp]
theorem event_top_coe :
  ((event B (top : B) : EventSpan B) : ProbabilityPoint B -> ? ?) = 1 :=
  eventVector_top B

@[simp]
theorem event_sup_of_disjoint {a b : B} (h : Disjoint a b) :

```

```

    event B (a sqsup b) = event B a + event B b := by
    apply Subtype.ext
    exact eventVector_sup_of_disjoint B h

/-- Pointwise positivity for a functional on the event span. -/
def IsPositive (L : EventSpan B → L[?] ?) : Prop :=
  forall f : EventSpan B,
    (forall p : ProbabilityPoint B, 0 ≤ (f : ProbabilityPoint B → ? ?) p) →
      0 ≤ L f

/-- A positive normalized bounded linear functional on the universal event span. -/
structure PositiveState where
  functional : EventSpan B → L[?] ?
  positive : IsPositive B functional
  normalized : functional (event B top) = 1

/-- Evaluation at a finitely additive probability is a positive normalized state. -/
def probabilityToState (p : ProbabilityPoint B) : PositiveState B where
  functional :=
    (BoundedContinuousFunction.evalCLM ? p).comp (EventSpan B).subtypeL
  positive := by
    intro f hf
    exact hf p
  normalized := by
    exact p.2.top

@[ext]
theorem PositiveState.ext {S T : PositiveState B}
  (h : S.functional = T.functional) : S = T := by
  cases S
  cases T
  simp_all

/-- A positive normalized state restricts to a finitely additive probability on events. -/
def stateToProbability (S : PositiveState B) : ProbabilityPoint B := by
  refine <fun a => S.functional (event B a), ?_>
  refine
    { bot := by simp
      top := S.normalized
      additive := ?_
      nonnegative := ?_ }
  *
  intro a b h
  rw [event_sup_of_disjoint B h, map_add]
  *
  intro a
  apply S.positive
  intro p
  exact p.2.nonnegative a

@[simp]
theorem stateToProbability_apply (S : PositiveState B) (a : B) :
  (stateToProbability B S).1 a = S.functional (event B a) :=
  rfl

@[simp]
theorem stateToProbability_probabilityToState (p : ProbabilityPoint B) :
  stateToProbability B (probabilityToState B p) = p := by
  apply Subtype.ext
  funext a
  rfl

theorem probabilityToState_stateToProbability (S : PositiveState B) :

```

```

probabilityToState B (stateToProbability B S) = S := by
cases S with
| mk L hpos hnorm =>
  apply PositiveState.ext
  apply ContinuousLinearMap.ext
  intro f
  change f.1 (stateToProbability B <L, hpos, hnorm>) =
    L f
  refine Submodule.span_induction
  (p := fun g hg =>
    g (stateToProbability B <L, hpos, hnorm>) =
      L <g, hg>) ?_ ?_ ?_ ?_ f.2
  * intro g hg
  rcases hg with <a, rfl>
  rfl
  * change 0 = L 0
  simp
  * intro x y hx hy hx' hy'
  change x (stateToProbability B <L, hpos, hnorm>) +
    y (stateToProbability B <L, hpos, hnorm>) =
    L (<x, hx> + <y, hy>)
  rw [map_add, hx', hy']
  * intro c x hx hx'
  change c * x (stateToProbability B <L, hpos, hnorm>) =
    L (c * <x, hx>)
  rw [map_smul, hx']
  simp [smul_eq_mul]

```

Lean 4 source (lines 401–412)

```

/-- Finitely additive probabilities and positive normalized states on `EventSpan`
are canonically equivalent. -/
def probabilityStateEquiv : ProbabilityPoint B ? PositiveState B where
  toFun := probabilityToState B
  invFun := stateToProbability B
  left_inv := stateToProbability_probabilityToState B
  right_inv := probabilityToState_stateToProbability B

end

end Scott1964.MeasurementStructures.Probability.Infinite

```

A.19 Scott1964/MeasurementStructures/Probability/Infinite/HahnBanach.lean

58 lines.

Lean 4 source

```

import Mathlib.Analysis.LocallyConvex.Separation
import Mathlib.Analysis.Convex.Cone.Basic

/-!
# Hahn--Banach separation above a closed cone

This is the analytic step used in the reconstructed infinite version of
Scott's Theorem 4.1. A closed convex set which is stable under translation
by a closed cone and avoids zero admits a functional which is nonnegative on
the cone and strictly positive on the set.
-/

namespace Scott1964.MeasurementStructures.Probability.Infinite

```

```

open Set

noncomputable section

variable {E : Type*} [NormedAddCommGroup E] [NormedSpace ? E]
[LocallyConvexSpace ? E]

/-- `K` is upward closed under translation by the cone `C`. -/
def ConeUpperSet (C : ProperCone ? E) (K : Set E) : Prop :=
  forall ?x c?, x in K -> c in C -> x + c in K

/-- The Hahn--Banach separation lemma in the exact form needed for Kelley's
countable-cover argument. -/
theorem exists_positive_separator_of_coneUpper
  (C : ProperCone ? E) {K : Set E}
  (hKne : K.Nonempty) (hKconv : Convex ? K) (hKclosed : IsClosed K)
  (hKzero : (0 : E) notin K) (hupper : ConeUpperSet C K) :
  exists f : StrongDual ? E,
    (forall c in C, 0 <= f c) /\ forall x in K, 0 < f x := by
obtain <f, u, hfu, hfK> :=
  geometric_hahn_banach_point_closed hKconv hKclosed hKzero
have hu : 0 < u := by simpa using hfu
rcases hKne with <x_0, hx_0>
have hcne : forall c in C, 0 <= f c := by
  intro c hc
  by_contra hneg
  have hfc : f c < 0 := lt_of_not_ge hneg
  have hden : 0 < -f c := neg_pos.mpr hfc
  obtain <n : Nat, hn> := exists_nat_gt ((f x_0 - u) / (-f c))
  have hn' : f x_0 - u < (n : ?) * (-f c) :=
    (div_lt_iff_0 hden).mp hn
  have hnc : (n : ?) * c in C :=
    C.smul_mem hc (Nat.cast_nonneg n)
  have hxnc : x_0 + (n : ?) * c in K := hupper hx_0 hnc
  have hsep := hfK _ hxnc
  rw [map_add, map_smul, smul_eq_mul] at hsep
  linarith
refine <f, hcne, ?_>
intro x hx
exact hu.trans (hfK x hx)

end

end Scott1964.MeasurementStructures.Probability.Infinite

```

A.20 Scott1964/MeasurementStructures/Probability/Infinite/Kelley.lean

120 lines.

Lean 4 source

```

import Scott1964.MeasurementStructures.Probability.Infinite.HahnBanach
import Mathlib.Analysis.Normed.Module.Dual

/-!
# A generalized Kelley cover

The countable cover below is the explicit Archimedean hypothesis used in the
reconstructed infinite theorem. Each layer is a closed convex upper set over
the weak-comparison cone and is bounded away from zero. Hahn--Banach supplies
one positive separator per nonempty layer.
-/

```

```

namespace Scott1964.MeasurementStructures.Probability.Infinite

open Set

noncomputable section

variable {E : Type*} [NormedAddCommGroup E] [NormedSpace ? E]
[LocallyConvexSpace ? E]

/-- Countable Kelley cover of strict-comparison vectors above a closed weak
comparison cone. -/
structure KelleyCover (C : ProperCone ? E) (S : Set E) where
  layer : Nat -> Set E
  strictInCone : S ⊆ C
  covers : S ⊆ ⋃ n, layer n
  convex : ∀ n, Convex ? (layer n)
  closed : ∀ n, IsClosed (layer n)
  avoidsZero : ∀ n, (0 : E) ∉ layer n
  upper : ∀ n, ConeUpperSet C (layer n)

/-- Hahn--Banach produces a positive separator for every layer, with the zero
functional used harmlessly on empty layers. -/
theorem KelleyCover.exists_separator_family {C : ProperCone ? E} {S : Set E}
(h : KelleyCover C S) :
  exists f : Nat -> StrongDual ? E,
    (∀ n c, c ∈ C -> 0 ≤ f n c) /\
    (∀ n x, x ∈ h.layer n -> 0 < f n x) := by
  classical
  have hex : ∀ n, exists f : StrongDual ? E,
    (∀ c, c ∈ C -> 0 ≤ f c) /\
    (∀ x, x ∈ h.layer n -> 0 < f x) := by
    intro n
    by_cases hne : (h.layer n).Nonempty
    * obtain <f, hfC, hfK> :=
        exists_positive_separator_of_coneUpper C hne
        (h.convex n) (h.closed n) (h.avoidsZero n) (h.upper n)
    exact <f, hfC, hfK>
    * refine <0, by simp, ?_>
    intro x hx
    exact (hne <x, hx>).elim
  choose f hf using hex
  exact <f, fun n c hc |>-> (hf n).1 c hc, fun n x hx |>-> (hf n).2 x hx>

/-- A summable positive combination of the layer separators is nonnegative on
the weak cone and strictly positive on every covered strict vector. -/
theorem KelleyCover.exists_combined_separator
{C : ProperCone ? E} {S : Set E} (h : KelleyCover C S) :
  exists F : StrongDual ? E,
    (∀ c ∈ C, 0 ≤ F c) /\ ∀ x ∈ S, 0 < F x := by
  classical
  obtain <f, hfC, hfK> := h.exists_separator_family
  let w : Nat -> ? := fun n |>-> (1 / 2 : ?) ^ n / (1 + ?f n?)
  let g : Nat -> StrongDual ? E := fun n |>-> w n * f n
  have hwpos : ∀ n, 0 < w n := by
    intro n
    exact div_pos (pow_pos (by norm_num) _) (by positivity)
  have hgnorm : ∀ n, ?g n? ≤ (1 / 2 : ?) ^ n := by
    intro n
    have hb : 0 ≤ (1 / 2 : ?) ^ n := (pow_nonneg (by norm_num) _)
    have hd : 0 < 1 + ?f n? := by positivity
    have hr : ?f n? / (1 + ?f n?) ≤ 1 :=
      (div_le_one hd).2 (by linarith [norm_nonneg (f n)])

```

```

change ?w n * f n? <= (1 / 2 : ?) ^ n
rw [norm_smul, Real.norm_eq_abs, abs_of_pos (hwpos n)]
calc
  w n * ?f n? =
    (1 / 2 : ?) ^ n * (?f n? / (1 + ?f n?)) := by
      dsimp [w]
      ring
  _ <= (1 / 2 : ?) ^ n * 1 := mul_le_mul_of_nonneg_left hr hb
  _ = (1 / 2 : ?) ^ n := mul_one _
have hgeom : Summable (fun n : Nat |-> (1 / 2 : ?) ^ n) :=
  summable_geometric_of_norm_lt_one (by norm_num)
have hnormsum : Summable (fun n |-> ?g n?) :=
  Summable.of_nonneg_of_le (fun _ |-> norm_nonneg _) hgnorm hgeom
have hgsum : Summable g := Summable.of_norm hnormsum
let F : StrongDual ? E := ?' n, g n
refine <F, ?_, ?_>
* intro c hc
  have happly := ((ContinuousLinearMap.apply ? ?) c).map_tsum hgsum
  change F c = ?' n, g n c at happly
  rw [show F c = ?' n, g n c from happly]
  apply tsum_nonneg
  intro n
  change 0 <= w n * f n c
  exact mul_nonneg (hwpos n).le (hfC n c hc)
* intro x hx
  rcases Set.mem_iUnion.mp (h.covers hx) with <n, hxn>
  have heval : Summable (fun k |-> g k x) := by
    have hm := hgsum.map ((ContinuousLinearMap.apply ? ?) x)
    ((ContinuousLinearMap.apply ? ?) x).continuous
    change Summable (fun k |-> g k x) at hm
    exact hm
  have hterm : 0 < g n x := by
    change 0 < w n * f n x
    exact mul_pos (hwpos n) (hfK n x hxn)
  have hle : g n x <= ?' k, g k x :=
    heval.le_tsum n (fun k _ |-> by
      change 0 <= w k * f k x
      exact mul_nonneg (hwpos k).le (hfC k x (h.strictInCone hx)))
  have happly := ((ContinuousLinearMap.apply ? ?) x).map_tsum hgsum
  change F x = ?' k, g k x at happly
  rw [show F x = ?' k, g k x from happly]
  exact hterm.trans_le hle
end

end Scott1964.MeasurementStructures.Probability.Infinite

```

A.21 Scott1964/MeasurementStructures/Probability/Infinite/Reconstructed.lean

220 lines.

Lean 4 source

```

import Scott1964.MeasurementStructures.Probability.Infinite.EventSpace
import Scott1964.MeasurementStructures.Probability.Infinite.Kelley

```

```

/-!

```

```

# A modern reconstruction of the infinite probability theorem

```

Scott's published 1964 paper states and proves the finite theorem. The result below is a modern functional-analytic reconstruction of the corresponding infinite statement; it is not presented as Scott's unpublished theorem.

```

Weak comparisons generate a closed cone in the universal event span, expressed
here by its continuous dual polar. The additional generalized Kelley condition
gives a countable cover of the strict comparisons by closed convex upper sets.
The real Hahn--Banach theorem in `HahnBanach.lean`, through
`KelleyCover.exists_combined_separator`, then supplies one functional which is
nonnegative on every weak comparison and positive on every strict comparison.
-/

namespace Scott1964.MeasurementStructures.Probability.Infinite

open Set

noncomputable section

universe u

variable {B : Type u} [BooleanAlgebra B]

/-- The signed event-span vector associated with the comparison of `x` to `y`. -/
def comparisonVector (B : Type u) [BooleanAlgebra B] (x y : B) : EventSpan B :=
  event B x - event B y

/-- The closed weak-comparison cone, defined as the intersection of all closed
dual half-spaces which contain the declared weak comparisons. -/
def weakComparisonCone (R : B → B → Prop) : ProperCone ? (EventSpan B) :=
  ? (L : StrongDual ? (EventSpan B))
    (_hL : forall x y, R x y → 0 ≤ L (comparisonVector B x y)),
    (ProperCone.positive ? ?).comap L

theorem mem_weakComparisonCone_iff {R : B → B → Prop} {v : EventSpan B} :
  v in weakComparisonCone R <=>
    forall L : StrongDual ? (EventSpan B),
      (forall x y, R x y → 0 ≤ L (comparisonVector B x y)) →
        0 ≤ L v := by
  simp [weakComparisonCone]

theorem comparisonVector_mem_weakComparisonCone {R : B → B → Prop}
  {x y : B} (hxy : R x y) :
  comparisonVector B x y in weakComparisonCone R := by
  rw [mem_weakComparisonCone_iff]
  intro L hL
  exact hL x y hxy

/-- The set of vectors corresponding to source-strict comparisons
`x ? y`, namely `not R y x`. -/
def strictComparisonSet (R : B → B → Prop) : Set (EventSpan B) :=
  {v | exists x y, StrictlyPreferred R x y /\ v = comparisonVector B x y}

theorem comparisonVector_mem_strictComparisonSet {R : B → B → Prop}
  {x y : B} (hxy : StrictlyPreferred R x y) :
  comparisonVector B x y in strictComparisonSet R :=
  <x, y, hxy, rfl>

/-- Concrete generalized Kelley condition used by this reconstruction: strict
comparison vectors admit a countable Kelley cover above the closed weak cone. -/
def GeneralizedKelleyCondition (R : B → B → Prop) : Prop :=
  Nonempty (KelleyCover (weakComparisonCone R) (strictComparisonSet R))

private theorem exists_reciprocal_le {r : ?} (hr : 0 < r) :
  exists n : Nat, (1 : ?) / (n + 1) ≤ r := by
  obtain <n : Nat, hn> := exists_nat_gt (1 / r)
  refine <n, ?_>

```

```

have hnpos : (0 : ?) < n + 1 := by positivity
rw [div_le_iff_0 hnpos]
have hr' : (1 : ?) < (n + 1) * r := by
  have := (div_lt_iff_0 hr).mp hn
  nlinarith
nlinarith

private theorem realizable_generalizedKelley
  {R : B → B → Prop} (hR : RealizableProbability R) :
    GeneralizedKelleyCondition R := by
  rcases hR with <?, h?, hrep>
  let p : ProbabilityPoint B := <?, h?>
  let L : StrongDual ? (EventSpan B) :=
    (BoundedContinuousFunction.evalCLM ? p).comp (EventSpan B).subtypeL
  let K : Nat → Set (EventSpan B) :=
    fun n => {v | (1 : ?) / (n + 1) <= L v}
  refine <{
    layer := K
    strictInCone := ?_
    covers := ?_
    convex := ?_
    closed := ?_
    avoidsZero := ?_
    upper := ?_
  }>
  * rintro v <x, y, hstrict, rfl>
    apply comparisonVector_mem_weakComparisonCone
    apply (hrep x y).2
    exact le_of_not_gt (fun h => hstrict ((hrep y x).2 h.le))
  * rintro v <x, y, hstrict, rfl>
    have hpos : 0 < L (comparisonVector B x y) := by
      change 0 < ? x - ? y
      apply sub_pos.mpr
      exact lt_of_not_ge (fun h => hstrict ((hrep y x).2 h))
    obtain <n, hn> := exists_reciprocal_le hpos
    apply Set.mem_iUnion.mpr
    exact <n, hn>
  * intro n
    exact convex_halfSpace_ge L.toLinearMap.isLinear _
  * intro n
    exact isClosed_le continuous_const L.continuous
  * intro n hz
    change (1 : ?) / (n + 1) <= L 0 at hz
    rw [map_zero] at hz
    have : (0 : ?) < 1 / (n + 1) := by positivity
    linarith
  * intro n v c hv hc
    dsimp [K] at hv |-
    rw [map_add]
    apply hv.trans
    apply le_add_of_nonneg_right
    rw [mem_weakComparisonCone_iff] at hc
    apply hc L
    intro x y hxy
    change 0 <= ? x - ? y
    exact sub_nonneg.mpr ((hrep x y).1 hxy)

private theorem generalizedKelley_realizable
  {R : B → B → Prop}
  (hnt : ProbNontrivial R) (hnn : ProbNonneg R) (htot : ProbTotal R)
  (hK : GeneralizedKelleyCondition R) :
    RealizableProbability R := by
  rcases hK with <cover>

```

```

obtain <F, hFweak, hFstrict> := cover.exists_combined_separator
have htopStrict : StrictlyPreferred R ( top : B) False := hnt.2
have htopSet :
  comparisonVector B ( top : B) False in strictComparisonSet R :=
  comparisonVector_mem_strictComparisonSet htopStrict
have htopPos : 0 < F (event B ( top : B)) := by
  have := hFstrict _ htopSet
  have hvec :
    event B ( top : B) - event B (False : B) = event B ( top : B) := by
      rw [event_bot]
    exact sub_zero (event B ( top : B))
  rwa [comparisonVector, hvec] at this
let ? : B -> ? := fun a => F (event B a) / F (event B ( top : B))
have h? : IsProbability ? := by
  refine {
    bot := ?_
    top := ?_
    additive := ?_
    nonnegative := ?_
  }
* simp [?]
* exact div_self htopPos.ne'
* intro x y hxy
  simp only [?]
  rw [event_sup_of_disjoint B hxy, map_add, add_div]
* intro x
  have hxcone :
    comparisonVector B x False in weakComparisonCone R :=
    comparisonVector_mem_weakComparisonCone (hnn x)
  have hxnnonneg := hFweak _ hxcone
  have : 0 <= F (event B x) := by
    have hvec : event B x - event B (False : B) = event B x := by
      rw [event_bot]
    exact sub_zero (event B x)
  rwa [comparisonVector, hvec] at hxnnonneg
  exact div_nonneg this htopPos.le
refine <?, h?, ?_>
intro x y
constructor
* intro hxy
  have hccone :
    comparisonVector B x y in weakComparisonCone R :=
    comparisonVector_mem_weakComparisonCone hxy
  have hnonneg := hFweak _ hccone
  change F (event B x) / F (event B top) >=
    F (event B y) / F (event B top)
  exact (div_le_div_iff_of_pos_right htopPos).2 (by
    have hmap := map_sub F (event B x) (event B y)
    change 0 <= F (event B x - event B y) at hnonneg
    linarith)
* intro h?xy
  rcases htot x y with hxy | hyx
* exact hxy
* by_contra hnxy
  have hstrict : StrictlyPreferred R y x := hnxy
  have hset :
    comparisonVector B y x in strictComparisonSet R :=
    comparisonVector_mem_strictComparisonSet hstrict
  have hpos := hFstrict _ hset
  have hlt : ? x < ? y := by
    change F (event B x) / F (event B top) <
      F (event B y) / F (event B top)
  rw [div_lt_div_iff_of_pos_right htopPos]

```

```

    have hmap := map_sub F (event B y) (event B x)
    change 0 < F (event B y - event B x) at hpos
    linarith
    exact (not_lt_of_ge h?xy) hlt

/-- Modern reconstruction of an infinite analogue of Scott's Theorem 4.1.
This is deliberately documented as a reconstruction, not as an attribution of
an unpublished theorem to Scott. -/
theorem reconstructed_infinite_theorem_4_1 (R : B -> B -> Prop) :
  RealizableProbability R <=>
    ProbNontrivial R /\ ProbNonneg R /\ ProbTotal R /\
    GeneralizedKelleyCondition R := by
  constructor
  * intro hR
    exact <hR.probNontrivial, hR.probNonneg, hR.probTotal,
      realizable_generalizedKelley hR>
  * rintro <hnt, hnn, htot, hK>
    exact generalizedKelley_realizable hnt hnn htot hK

end

end Scott1964.MeasurementStructures.Probability.Infinite

```

A.22 Scott1964/MeasurementStructures/Basic.lean

48 lines.

Lean 4 source

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/

import Scott1964.MeasurementStructures.FinHead
import Scott1964.MeasurementStructures.LinearInequalities.Definitions
import Scott1964.MeasurementStructures.LinearInequalities.Separation
import Scott1964.MeasurementStructures.LinearInequalities.Rationalization
import Scott1964.MeasurementStructures.LinearInequalities.Sequences
import Scott1964.MeasurementStructures.LinearInequalities.ScottTheorems
import Scott1964.MeasurementStructures.LinearInequalities.OrderedGroup
import Scott1964.MeasurementStructures.Preference.Direct
import Scott1964.MeasurementStructures.Preference.Cycle
import Scott1964.MeasurementStructures.Preference.Intransitive
import Scott1964.MeasurementStructures.Differences.Pair
import Scott1964.MeasurementStructures.Differences.Ordered
import Scott1964.MeasurementStructures.Probability.Basic
import Scott1964.MeasurementStructures.Probability.Atoms
import Scott1964.MeasurementStructures.Probability.Finite
import Scott1964.MeasurementStructures.Probability.KPSCounterexample
import Scott1964.MeasurementStructures.Probability.Infinite.EventSpace
import Scott1964.MeasurementStructures.Probability.Infinite.HahnBanach
import Scott1964.MeasurementStructures.Probability.Infinite.Kelley
import Scott1964.MeasurementStructures.Probability.Infinite.Reconstructed

/-!
# Scott 1964 -- Measurement Structures and Linear Inequalities

Primary source: Dana S. Scott, *Measurement Structures and Linear
Inequalities*, Journal of Mathematical Psychology 1 (1964), 233-247.
Working transcription: `sources/ScottMeasurement1964_vision.md`.

```

The paper applies the general solvability criterion for finite systems of linear inequalities (Theorems 1.1-1.4) to three measurement problems: intransitive indifference (Theorem 2.1), ordered differences (Theorems 3.1 and 3.2), and subjective probability (Theorem 4.1).

This module re-exports the complete sorry-free development imported by ``Solution.lean``: Scott's eight published theorems, the finite KPS counterexample, and the separately labelled modern reconstruction of the infinite probability theorem.

-/

namespace Scott1964.MeasurementStructures

end Scott1964.MeasurementStructures