

A Lean 4 Formalization of Scott’s Data Types as Lattices (1976)

Lars Warren Ericson¹

¹ORCID: 0000-0001-8299-9361

¹Catskills Research Company

¹lars.ericson@catskillsresearch.com

September 7, 2026

Github: <https://github.com/catskillsresearch/scott1976>

Palomar Registration:

<https://palomar-registry.org/entry?id=PALOMAR-2026-08-25-000004&version=1>

Primary Category: cs.LO (Logic in Computer Science)

Secondary Category: math.LO (Logic)

Abstract

This note records a Lean 4 / mathlib formalization of Dana Scott’s 1976 paper *Data Types as Lattices*. Scott develops the graph model of the λ -calculus inside the complete lattice $\mathbf{P}\omega$ of subsets of the natural numbers, then uses retracts of that lattice as data types. The Lean development is a 1:1 onto translation of every numbered definition, theorem, displayed equation used as a definition or example, and Tables 1–3.

The sorry-free library consists of approximately 17,000 lines in 15 files under `Scott1976/` (the root import plus fourteen modules). Palomar Challenge / Solution files select the 63 theorem declarations and 70 locked definitions named in `comparator.json`. A Comparator match establishes those selected statements, not every informal clause of every numbered theorem; further companions remain in the library. The locked coproduct `plusR` uses the doubly strict conditional of (4.4) rather than the ordinary conditional written in displayed (4.10).

The repository has no project-defined axioms and no Lake dependency beyond mathlib. Completed proofs use the standard classical mathlib footprint [`propext`, `Quot.sound`, `Classical.choice`]. Deliberate proof holes occur only in the Mathlib-only `Challenge.lean`; `Solution.lean` re-exports the kernel-checked development.

Dana Scott was not contacted and did not participate in, review, or endorse this formalization. Lean code was written by AI agents under the direction and review of the author, who takes sole responsibility for the mathematical content.

Proofs in this note are summarized at the level of their main constructions. Short representative Lean fragments are copied from the library; a generated review copy with the complete source appendix is available through (`scripts/generate_arxiv_with_code.sh` → `arxiv_with_code.md`).

- **Cursor [Cur26]** — agent-assisted editing in the Cursor IDE: formalizing Scott’s 1976 *Data Types as Lattices* in Lean 4 / mathlib, lake build repair, vision-OCR transcription, drafting this narrative (`arxiv.md`), and tracking the formalized inventory. Generated Lean was provisional until it compiled under the pinned toolchain.
- **Cursor Composer 2.5 Fast [Cmp25]** — routine multi-step work: module scaffolding, dependency-ordered wiring of `Scott1976/DataTypesAsLattices/`, documentation, and medium proof obligations where the strategy was already fixed.

- **Anthropic Claude Sonnet 5 (medium reasoning)** [Son26] — day-to-day formalization and proof-engineering in Cursor at the medium reasoning tier: inventory and narrative maintenance, module wiring, and medium-complexity Lean obligations where the proof strategy was already fixed.
- **Anthropic Claude Opus 4.8 (high reasoning)** [Ant26] — selective use for the heaviest proof work. Every emitted proof term was checked by the Lean kernel.

1 Introduction

Scott’s monograph answers a single question in several registers: what is a data type, if types are to be lattices and programs are to be continuous maps? The carrier is $\mathbf{P}\omega$, the power set of $\mathbb{N}$, ordered by inclusion. Finite subsets e_n are a countable basis. A map $f : \mathbf{P}\omega \rightarrow \mathbf{P}\omega$ is continuous when it preserves directed unions, equivalently when $f(x) = \bigcup \{f(e_n) \mid e_n \subseteq x\}$. Continuous maps are encoded as graphs and recovered by application, so the function space lives inside $\mathbf{P}\omega$ itself.

LAMBDA is the combinatory language of that encoding. Its interpretation is continuous in every free variable (Theorem 2.3), the compared conversion theorem is a conditional semantic congruence (Theorem 2.2), and a continuous map is computable exactly when its graph is recursively enumerable, equivalently combinatory, equivalently LAMBDA-definable (Theorem 2.6). Enumeration then internalizes Gödel numbering: `val` enumerates the combinatory subalgebra **RE**, the second recursion theorem and Myhill–Shepherdson appear as continuity facts, and degrees of unsolvability are finitely generated combinatory subalgebras.

Retracts of $\mathbf{P}\omega$ are the data types. The constructions $a \circ \rightarrow b$, $a \otimes b$, and $a \oplus b$ are themselves retracts when a and b are, inverse limits exist by the fixed-point theorem, and recursive domain equations such as

$$\mathbf{lamb} = \mathbf{int} \oplus (\mathbf{lamb} \circ \rightarrow \mathbf{lamb}), \quad \mathbf{exp} = \mathbf{int} \oplus \mathbf{nil} \oplus \mathbf{exp} \oplus \mathbf{exp} \oplus (\mathbf{exp})^4 \oplus (\mathbf{exp} \otimes \mathbf{exp}) \oplus (\mathbf{int} \otimes \mathbf{exp})$$

are solved in place. Closures classify algebraic lattices; V is a universe of closures. The Borel/analytic hierarchy of §§6–7 is expressed with continuous preimages and equalizers, and restricted equivalences make the combinators I, K, S and the iterators functional.

The formalization follows this mathematical decomposition rather than treating the forty-odd numbered theorems as unrelated endpoints.

2 Scope and layout

The library has 15 Lean files and approximately 17,000 lines. The root module `Scott1976.lean` imports the complete development; `Basic.lean` is a thin facade. `Solution.lean` imports `Scott1976/*`.

Module	Role
Pomega	$\mathbf{P}\omega$, e_n , $\perp$, $\top$, pairing
Continuous	Scott-open sets, continuity, Theorem 1.1
Graph	<code>graph</code> / <code>fun</code> , Theorem 1.2
FixedPoint	Substitution, least fixed points, Theorems 1.3–1.4
Embedding	Extension and embedding, Theorems 1.5–1.6
Lambda	Table 1–2, combinators, Theorems 2.1–2.5
Computability	r.e. graphs, Theorem 2.6 (unary and k -ary)
Enumeration	<code>G</code> , <code>val</code> , Theorems 3.1–3.7, <code>vaal</code>

Module	Role
<code>FixedLattices</code>	Algebraic and continuous lattices (support)
<code>Retracts</code>	Retracts, $\circ \rightarrow$, $\otimes$, $\oplus$, Theorems 4.1–4.6, <code>exp</code> (4.38)–(4.45) <code>tree/lamb/</code> , Theorems 7.1–7.4
<code>Functionality</code>	
<code>Closures</code>	Closures, V , Theorems 5.1–5.6
<code>Classification</code>	$\mathfrak{G}$, $\mathfrak{F}$, $\mathfrak{B}$, Theorems 6.1–6.7, Table 3
<code>Challenge / Solution</code>	Palomar statement of record and sorry-free realization

The published scope is the numbered items of §§1–7 together with Tables 1–3. One source-facing note remains visible in the inventory and is not a missing proof: Theorem 4.5’s informal coproduct non-uniqueness remark is omitted.

The project is standalone. It imports none of the sibling formalizations of Scott’s later domain-theory papers. Cross-presentation equivalences live in the separate `scott_models` repository.

3 How the proofs use mathlib

Mathlib supplies the set-theoretic and classical substrate. The predicates and reductions specific to Scott’s paper are defined in this repository.

Power sets and directed unions. $\mathbf{P}\omega$ is `Set N`. Directed suprema are ordinary unions of directed families; the finite basis e_n is an explicit pairing enumeration. Continuity is the equality $f(x) = \bigcup_n f(e_n)$ on $e_n \subseteq x$, not a topology imported from mathlib’s Scott topology.

Classical graphs. Application `funOf u x` decodes pairs from the graph of u . Least fixed points are $\bigcup_n f^n(\emptyset)$. The only axioms that appear are mathlib’s standard classical triple.


Recursion and combinators. Syntax of LAMBDA and of the modified language `LambTerm` is an inductive type. Interpretation lemmas are ordinary structural induction. Primitive-recursive arithmetic on codes uses mathlib `N` lemmas; r.e. sets are ranges of combinatory enumerations, not an imported computability library.

Retracts as idempotents. A retract is a graph a with $a = a \circ a$. Typedness $x : a$ is the equation $x = a(x)$. Inverse limits of retracts are constructed from the iterates of a continuous functor by Theorem 1.4 / Theorem 4.6, not from a categorical limit API.


What mathlib does not supply is Scott’s interface: graphs of continuous maps on $\mathbf{P}\omega$, LAMBDA conversion, the combinatory algebra **RE**, retract constructors $\circ \rightarrow / \otimes / \oplus$, closures and V , or the $\mathfrak{G}/\mathfrak{F}/\mathfrak{B}$ classification. Those constructions are developed here.

4 Proof dependency structure


The published development is one lattice-theoretic core and six applications.

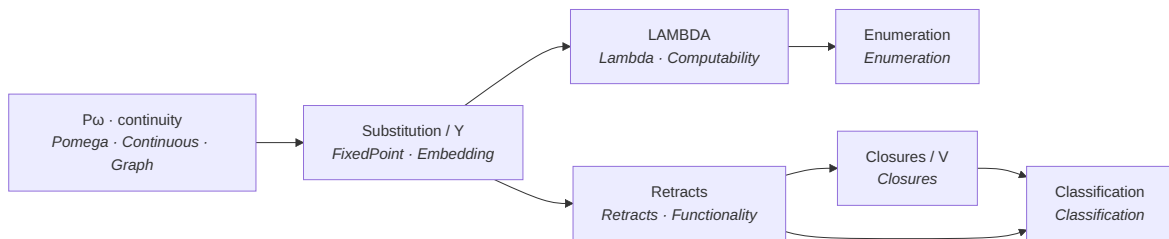


Section 4's domain examples depend on the retract constructors and on the fixed-point theorem. The continuous decoder $\mathcal{H}$ of (4.45) is the least fixed point of a syntax-directed operator, then retracted onto $\mathbf{exp} \circ \rightarrow (\mathbf{env} \circ \rightarrow \mathbf{lamb})$:

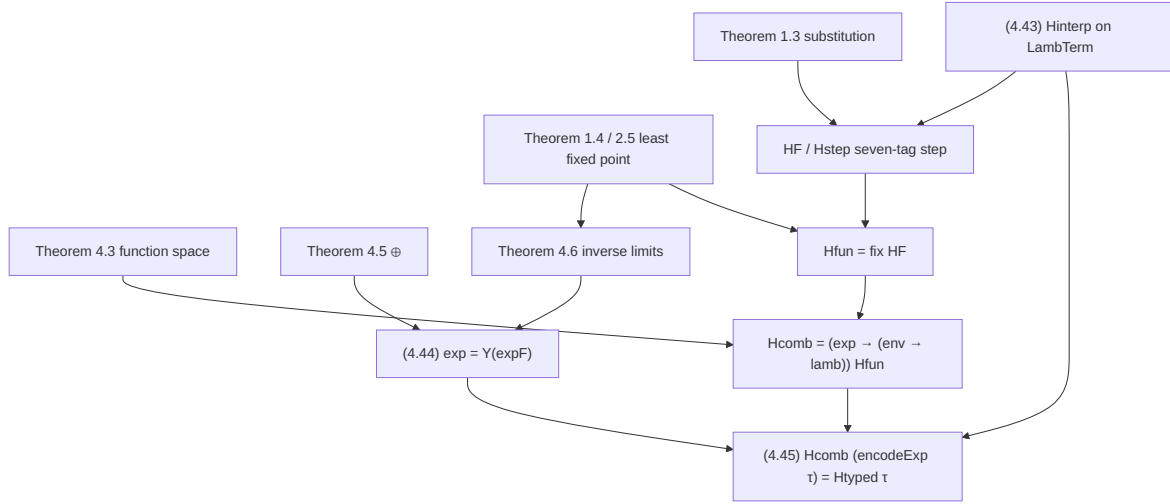

Enumeration and the tree evaluator (4.46) are a parallel use of the same fixed-point pattern:

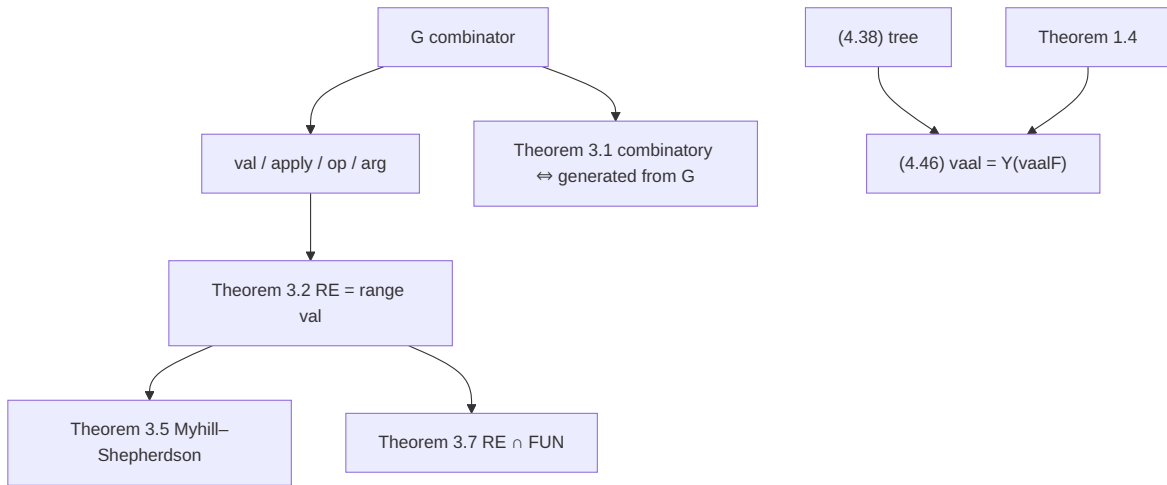

Closures reuse retracts but add $I \subseteq a$:

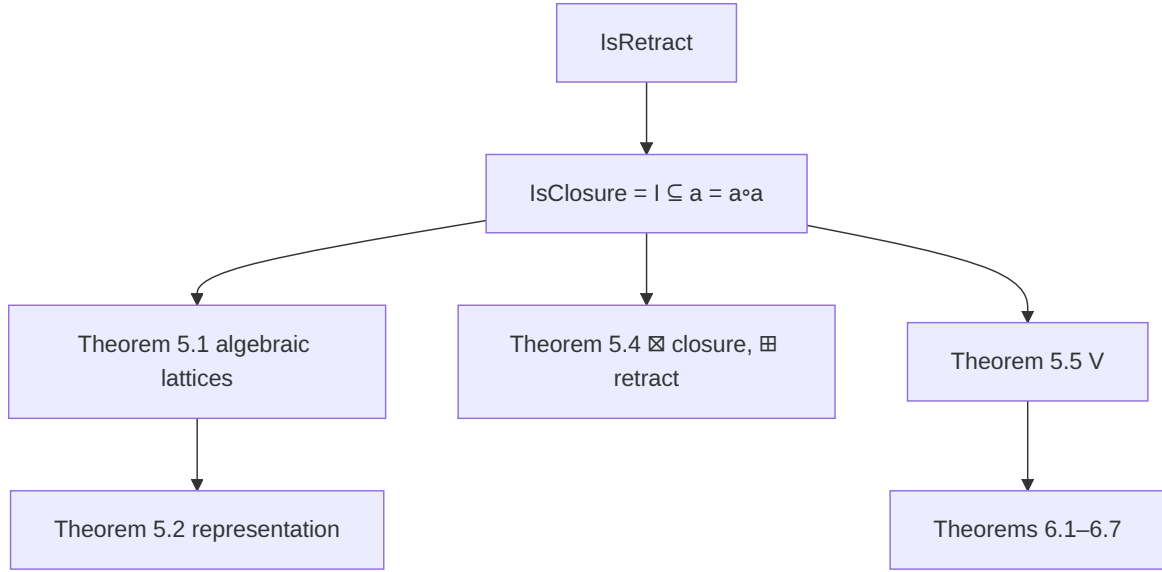

5 Living inventory

Status words:

- **faithful** — Lean statement matches Scott; library proof is sorry-free.
- **partial** — a named Lean declaration exists but is weaker than a tempting modern strengthening; the Lean statement is paper-accurate.
- **missing** — no faithful Lean declaration yet.

The library inventory below is **faithful** except for the Palomar-selected specializations and strengthenings recorded in `formalization.yaml` limitations. Comparator selects 63 theorems and 70 definitions from `comparator.json`; it does not claim that those names exhaust every informal clause of every numbered theorem.

Compared numbered theorems and selected companions:

- §1: theorem_1_1–theorem_1_6 (with theorem_1_3_tuple, theorem_1_3_nary, theorem_1_5_extends)
- §2: theorem_2_1–theorem_2_6 (with theorem_2_4_complete, theorem_2_6_fin)
- §3: theorem_3_1–theorem_3_7 (with theorem_3_2_range)
- §4: theorem_4_1–theorem_4_6 (with theorem_4_1_continuous, theorem_4_4_typed, tensorR_isRetract, tensorR_isStrict, tensorR_retractLe, tensorR_functor, theorem_4_5_sum, plusR_retractLe, plusR_functor, theorem_4_6_limit)
- §5: theorem_5_1–theorem_5_6 (with theorem_5_3_closure, typed_squarePair_boxTensor, theorem_5_4_plus, boxPlus_typed_iff, theorem_5_5_universe, theorem_5_6_combinator)
- §6: theorem_6_1–theorem_6_7
- §7: theorem_7_1–theorem_7_4

5.1 §1 Continuous functions

Item	Lean	Status
Def. $P\omega$, e_n , $\perp$, $\top$, pair	$P\omega$, e , botElem , topElem , pair	faithful
Def. basic neighbourhood / Scott-open	basicNhhd , IsScottOpen	faithful
Def. continuity $f(x) = f(e_n)$	IsScottContinuous	faithful
Def. graph , fun	graph , funOf	faithful
Theorem 1.1	theorem_1_1	faithful
Theorem 1.2	theorem_1_2	faithful
Theorem 1.3	theorem_1_3 , theorem_1_3_tuple , theorem_1_3_nary	faithful — unary/binary/ternary substitution, not arbitrary finite arity
Theorem 1.4	theorem_1_4	faithful
Theorem 1.5	theorem_1_5 , $\text{theorem_1_5_extends}$	theorem_1_5 is a strengthening (continuity of $\text{extend } f$ for every f); $\text{theorem_1_5_extends}$ restores Scott's continuity hypothesis
Theorem 1.6	theorem_1_6	faithful — countably based T_0 spaces

5.2 §2 LAMBDA

Item	Lean	Status
Table 1 $(\alpha)(\beta)(\gamma)$	theorem_2_2_alpha , theorem_2_2_beta , theorem_2_2_xi	faithful
Table 1 (γ) fails	eta_fails	faithful
Table 1 $(*)$	xi_star , table1_mu / mu_law	faithful
Table 2 syntax/semantics	Term , interp	faithful
(2.1)(2.2) max/min extension	maxExtend , minExtend , $\text{eq_2_1_empty_singleton_else}$	faithful
(2.3)(2.4) relation/sum	relComp , setSum	faithful
(2.5)(2.6)(2.7) examples	eq_2_5 , eq_2_6 , $\text{eq_2_7_bot_zero_succ_pos_mix}$	faithful
(2.8) Y	$Y\text{comb}$, $Y\text{comb_unfold}$	faithful
(2.9)–(2.13) distribution	$\text{eq_2_9} \dots \text{eq_2_13}$, eq_2_11_graphs	faithful — (2.11) equality when both arguments are graphs
(2.14)–(2.16)	eq_2_14 , eq_2_15 , union_via_cond , eq_2_16	faithful
FUN	FUN	faithful

Item	Lean	Status
(2.17) intersection encoding	eq_2_17, eq_2_17_step, interC	faithful
(2.18) K-fixed points	eq_2_18	faithful
(2.19)–(2.23) sequences	seq0, seq1, seq2, seqCons, eq_2_22, eq_2_23_*	faithful
(2.24)–(2.27) \$, primrec	eq_2_24, eq_2_24_Y, eq_2_24_Ycomb, dollarC, eq_2_25, lamOmega, eq_2_27, primRecVal_fix	faithful — \$ = Y(step); p = \$(Y(primRecStep))
(2.28) Y commuting	eq_2_28, eq_2_28_commute	faithful
Theorem 2.1	theorem_2_1	faithful
Theorem 2.2	theorem_2_2	partial — compared form is conditional semantic congruence (renamed bodies already agree), not source-level alpha from freshness
Theorem 2.3	theorem_2_3, _unary, _binary, _ternary	faithful — any finite arity via nested graphs
Theorem 2.4	theorem_2_4, theorem_2_4_complete, erase	faithful
Theorem 2.5	theorem_2_5	faithful
Def. computable	IsComputable	faithful
Theorem 2.6	theorem_2_6, theorem_2_6_fin, IsComputableFin	faithful — unary and k-ary; the nested graph is the pairing encoding of $m \in f(e_{n_0})(e_{n_{k-1}})$

5.3 §3 Enumeration

Item	Lean	Status
G	Gcomb, Gcomb_app_self	faithful — $G(G)=0$; $G(\perp)=\perp$
(3.1)(3.2)	eq_3_1, eq_3_2	faithful
Theorem 3.1	theorem_3_1, GeneratedFromG	faithful — combinatory iff generated from G alone
(3.4)–(3.7) apply, op, arg, val	applyNat, opNat, argNat, valNat	faithful — Scott's $val(0)=G$, $apply=(n,m)+1$
Theorem 3.2	theorem_3_2, theorem_3_2_range	faithful — RE = range val with (i)(ii)
(3.8)–(3.12)	eq_3_8_* ... eq_3_12	faithful
fin	fin, valNat_fin	faithful — $val(fin\ j)=e_j$
Theorem 3.3	theorem_3_3, theorem_3_3_val	faithful — primrec v/rec with (i)–(iii)
Theorem 3.4	theorem_3_4	faithful — $\neg IsRE\ \{n \mid val\ n = \perp\}$

Item	Lean	Status
Theorem 3.5	<code>theorem_3_5</code> , <code>myhillQ</code>	faithful — LAMBDA-definable extensional <code>p</code> yields LAMBDA-definable <code>q</code> with <code>val(p n) = q(val n)</code>
Theorem 3.6	<code>theorem_3_6</code> , <code>theorem_3_6_</code> <code>generated</code>	faithful — enumeration degrees are exactly the finitely generated combinatory subalgebras
R,L	<code>Rcomb</code> , <code>Lcomb</code> , <code>Rcomb_app</code> , <code>Lcomb_app</code>	faithful
(3.15)–(3.17)	<code>barComb</code> , <code>eq_3_15</code> , <code>eq_3_16</code> , <code>eq_3_17</code>	faithful — <code>= Y(barStep)</code> ; operator identities (3.16) and (3.17)
Theorem 3.7	<code>theorem_3_7</code>	faithful — <code>RE</code> $\cap$ <code>FUN</code> is the semigroup generated by <code>R</code> , <code>L</code> , and <code>G</code>

5.4 §4 Retracts

Item	Lean	Status
Def. <code>retract</code> , <code>u:a</code> , $\sqsubseteq$	<code>IsRetract</code> , <code>typed</code> , <code>retractLe</code>	faithful
(4.1)–(4.10) combinators	<code>funRetract</code> , <code>arrowR</code> , <code>tensorR</code> , <code>plusR</code> , <code>dcondSet</code> , <code>boolR</code> , <code>intR</code> , ...	<code>plusR</code> is a justified modification of displayed (4.10): Scott writes ordinary , Lean uses the doubly strict of (4.4), as in <code>bool</code> (4.3), so mixed tags map to $\top$ and Theorem 4.5 ($\oplus$ is a retract) holds; not a symbol-for-symbol 1:1 of the displayed equation. (4.7) <code>int</code> is <code>Y(intF)</code> with Scott's three-case table
Theorem 4.1	<code>theorem_4_1</code> , <code>theorem_4_1_</code> <code>complete</code> , <code>theorem_4_1_</code> <code>continuous</code>	faithful — fixed points of a continuous map form a complete lattice; retract ranges are continuous lattices
Theorem 4.2	<code>theorem_4_2</code>	faithful
Theorem 4.3	<code>theorem_4_3</code> , <code>arrowR_</code> <code>isRetract</code>	faithful — (i)–(v) packaged

Item	Lean	Status
Theorem 4.4	<code>theorem_4_4</code> , <code>theorem_4_4_typed</code> , <code>theorem_4_4_med</code> , <code>theorem_4_4_med_unique</code> , <code>tensorR_isRetract</code> , <code>tensorR_isStrict</code> , <code>tensorR_retractLe</code> , <code>tensorR_functor</code> , <code>eq_4_12</code> , <code>eq_4_17</code> – <code>eq_4_21</code> , <code>eq_4_24</code> , <code>eq_4_25</code> , <code>eval_curry</code>	faithful — product, mediator, CCC <code>eval/curry</code>
Theorem 4.5	<code>theorem_4_5_sum</code> , <code>plusR_isRetract</code> , <code>plusR_typed_iff</code> , <code>plusR_retractLe</code> , <code>plusR_functor</code> , <code>eq_4_13</code> , <code>eq_4_32</code> – <code>eq_4_37</code> , <code>inleftC</code> , <code>inrightC</code> , <code>outleftC</code> , <code>outrightC</code> , <code>whichC</code> , <code>outC</code> , <code>boolR_isRetract</code>	faithful — (i)–(iv) packaged; coproduct non-uniqueness remark omitted
Theorem 4.6	<code>theorem_4_6</code> , <code>theorem_4_6_limit</code>	<code>theorem_4_6_limit</code> is the order-isomorphism (inclusion-preserving bijection) with the inverse limit, not a homeomorphism
(4.38) <code>tree</code>	<code>treeR</code> , <code>eq_4_38</code> , <code>tree_atom</code> , <code>tree_node</code>	faithful — <code>tree = nil ⊕ (tree tree)</code> ; atom and binary nodes
(4.39)–(4.43) <code>lamb</code>	<code>lambR</code> , <code>envR</code> , <code>updateEnv</code> , <code>LambTerm</code> , <code>Hinterp</code>	faithful — data types and recursion on finite terms
(4.44) <code>exp</code>	<code>expR</code> , <code>eq_4_44</code> , <code>expR_isRetract</code>	faithful — seven-tag syntax functor; <code>exp = Y(expF)</code> is a retract
(4.45)	<code>eq_4_45</code> , <code>HF</code> , <code>Hfun</code> , <code>Hcomb</code> , <code>Htyped</code> , <code>Hcomb_decode</code>	faithful — is the retract of the least fixed point of a continuous seven-tag operator; <code>Hcomb(encodeExp τ) = Htyped τ</code>
(4.46) <code>vaal</code>	<code>vaalC</code> , <code>vaalC_unfold</code> , <code>vaalC_combinatorial</code> , <code>vaalC_typed</code>	faithful — <code>vaal : tree → id</code> as the least fixed point of (4.46), combinatorial and typed

5.5 §5 Closures

Item	Lean	Status
Def. closure $I \subseteq a = a \circ a$	<code>IsClosure</code>	faithful
(5.1)–(5.13) <code>pairing/box</code>	<code>eq_5_1</code> , <code>eq_5_2</code> , <code>squarePair</code> , <code>boxTensor</code> , <code>boxPlus</code> , <code>funRetract_isClosure</code> , <code>boool</code>	faithful

Item	Lean	Status
Theorem 5.1	<code>theorem_5_1</code> , <code>theorem_5_1_isolated</code>	faithful — closure fixed points form an algebraic lattice; compacts are the $\mathbf{a}(\mathbf{e})$
Theorem 5.2	<code>theorem_5_2</code>	faithful — every countable algebraic lattice is order-isomorphic to the range of a closure
Theorem 5.3	<code>theorem_5_3</code> , <code>theorem_5_3_closure</code> , <code>Icomb_subset_arrowR</code>	faithful
Theorem 5.4	<code>theorem_5_4</code> , <code>typed_squarePair_boxTensor</code> , <code>theorem_5_4_plus</code> , <code>boxPlus_typed_iff</code> , <code>eq_5_12</code> , <code>eq_5_22</code> , <code>eq_5_23</code>	faithful — <code>and</code> and <code>of</code> closures are closures; compared typing analogues of Theorems 4.4–4.5 are <code>typed_squarePair_boxTensor</code> and <code>boxPlus_typed_iff</code>
Theorem 5.5	<code>theorem_5_5</code> , <code>theorem_5_5_iff</code> , <code>theorem_5_5_universe</code> , <code>Vcomb</code> , <code>eq_5_14</code> , <code>eq_5_19</code> , <code>eq_5_21</code>	faithful — V is a closure; $V(\mathbf{a})=\mathbf{a}$ iff $\mathbf{a}$ is a closure; $(5.14)=(5.15)$
Theorem 5.6	<code>theorem_5_6</code> , <code>theorem_5_6_iterates</code> , <code>eq_5_24</code>	faithful — $Y(\mathbf{f}):V$ whenever $\mathbf{f}:V \multimap V$; $\multimap \rightarrow$ typed on V
(5.25) $\mathbf{d} = \mathbf{I} \cup (\mathbf{d} \multimap \rightarrow \mathbf{d})$	<code>dEq</code> , <code>eq_5_25</code>	faithful — $Y(\lambda \mathbf{a}. \mathbf{I} \cup (\mathbf{a} \multimap \rightarrow \mathbf{a}))$; $\mathbf{d} = \mathbf{d} \multimap \rightarrow \mathbf{d}$ if $\mathbf{I} \subseteq \mathbf{d} \multimap \rightarrow \mathbf{d}$

5.6 §6 Classification

Item	Lean	Status
Def. <code>_,</code>	<code>ScottG</code> , <code>ScottF</code> , <code>ScottB</code>	faithful
Theorem 6.1	<code>theorem_6_1</code>	faithful
Theorem 6.2	<code>theorem_6_2</code>	faithful
Theorem 6.3	<code>theorem_6_3</code>	faithful
Theorem 6.4	<code>theorem_6_4</code>	faithful
Theorem 6.5	<code>theorem_6_5</code>	partial — specialization to the representative target <code>succSet topElem</code>
Theorem 6.6	<code>theorem_6_6</code>	faithful
Theorem 6.7	<code>theorem_6_7</code>	faithful — $\mathbf{B}_-$ sets are exactly equalizers of continuous maps
Table 3 typical sets	<code>typicalG ... typicalPi11</code> , <code>typical*_universal</code>	faithful — each class is the continuous preimages of the typical set

5.7 §7 Functionality

Item	Lean	Status
Def. restricted equivalence	<code>RestrictedEquiv</code>	faithful
(7.4)–(7.8) $E_a, \rightarrow, \times, +$	<code>Ea, arrowE, prodE, sumE</code>	faithful
Theorem 7.1	<code>theorem_7_1</code>	faithful
Theorem 7.2	<code>theorem_7_2</code>	faithful — E_a a is the identity on the range of a and is isomorphic to the kernel $\ker E_a$; $E_{\{a \circ \rightarrow b\}} \cong E_a \rightarrow E_b$, $E_{\{ab\}} = E_a \times E_b$, and the $\oplus$ identity with $\{\perp, \top\}$
Theorem 7.3	<code>theorem_7_3</code>	faithful
Theorem 7.4	<code>theorem_7_4, theorem_7_4_unique</code>	faithful — $Z_n : (A \rightarrow A) \rightarrow (A \rightarrow A)$ for all A , and this with $z(f) = z(\lambda x. f(x))$ characterizes the iterators
(7.15)–(7.19) iterators	<code>Z, Zcomb, sigmaJ, eq_7_18_*</code>	faithful

6 Proof notes

6.1 Theorems 1.1–1.6 — continuity, graphs, and fixed points

Theorem 1.1 characterizes continuity by preservation of the finite basis. Theorem 1.2 says that u is a graph if and only if $u = \text{graph}(\text{fun } u)$. Substitution (Theorem 1.3) is used throughout as composition and as binary and ternary substitution on the diagonal (`theorem_1_3_tuple`, `theorem_1_3_nary`); the compared forms are not arbitrary finite-arity substitution:

Lean 4 source

```
theorem theorem_1_3 {f g : Pomega -> Pomega}
  (hf : IsScottContinuous f) (hg : IsScottContinuous g) :
  IsScottContinuous (fun x => f (g x))
```

The least-fixed-point theorem is the engine of every recursive domain equation and of (4.45):

Lean 4 source

```
theorem theorem_1_4 {f : Pomega -> Pomega} (hf : IsScottContinuous f) :
  f (fix f) = fix f /\ forall x, f x = x -> fix f subseq x
```

Theorem 1.5 is compared as a strengthening: `extend f` is continuous for every f , not only continuous f ; `theorem_1_5_extends` restores Scott’s continuity hypothesis for agreement on the subspace. Theorem 1.6 embeds a countably based T_0 space into $\mathbf{P}\omega$ along a countable basis.

6.2 Theorems 2.1–2.6 — LAMBDA and computability

Table 1 is proved as equational laws of `interp`, including the failure of (η) . The compared `theorem_2_2` is a conditional semantic congruence: it assumes the renamed bodies already have equal interpretations and lifts that equality through `lambda`; it is not source-level α -conversion from a freshness hypothesis. Theorem 2.3 is the finite-arity substitution theorem: a continuous map of n arguments is represented by a nested graph.

Lean 4 source

```

theorem theorem_2_3 {n : Nat} {f : (Fin n -> Pomega) -> Pomega}
  (hf : IsScottContinuousFin f) :
  exists u, forall xs, nestApplyFin u xs = f xs

```

Theorem 2.4 closes the combinatory algebra generated by the six constants 0, succ, pred, cond, K , and S . Theorem 2.5 identifies Y with the least-fixed-point combinator. Theorem 2.6 is the computability trinity. The Palomar-locked unary form is

Lean 4 source

```

theorem theorem_2_6 {f : Pomega -> Pomega} (hf : IsScottContinuous f) :
  (IsComputable f <-> IsRE (graph f)) /\
  (IsRE (graph f) <-> IsCombinatory (graph f)) /\
  (IsLambdaDefinable (graph f) <-> IsCombinatory (graph f))

```

The k -ary companion `theorem_2_6_fin` uses the nested-graph encoding of $m \in f(e_{n_0}) \cdots (e_{n_{k-1}})$.

6.3 Theorems 3.1–3.7 — enumeration

G is a combinator with $G(G) = 0$ and $G(\perp) = \perp$. Theorem 3.1 says the combinatory elements are exactly those generated from G alone. The enumeration `val` is Scott’s: `val(0)=G` and `apply(n,m)=(n,m)+1`. Theorem 3.2 identifies **RE** with the range of `val`. The second recursion theorem, incompleteness of $\{n \mid \text{val } n = \perp\}$, Myhill–Shepherdson, enumeration degrees, and the semigroup $\mathbf{RE} \cap \mathbf{FUN}$ are Theorems 3.3–3.7.

The tree evaluator (4.46) is the same pattern on the retract `tree` rather than on Gödel numbers: `vaalC = fix vaalF` for a continuous step, hence combinatory and typed `tree` $\rightarrow$ `id`.

6.4 Theorems 4.1–4.6 — retracts

A retract is an idempotent graph. Theorem 4.1: the fixed points of a continuous map form a complete lattice (`theorem_4_1`); the range of a retract has a directed way-below basis of finite images (`theorem_4_1_continuous`), which is the compared continuous-lattice half. Theorems 4.3–4.5 package the function-space, product, and sum constructors, including retractness, strictness, preservation of $\sqsubseteq$, the CCC structure `eval/curry`, and the four sum identities. Theorem 4.6 is the inverse-limit theorem used for `int`, `tree`, `lamb`, and `exp`. The compared `theorem_4_6_limit` is an inclusion-preserving bijection with the inverse limit (an order isomorphism), not a homeomorphism:

Lean 4 source

```

theorem theorem_4_6 {F : Pomega -> Pomega}
  (hf : IsScottContinuous F)
  (hret : forall a, IsRetract a -> IsRetract (F a)) :
  (forall n, IsRetract (iterateBot F n)) /\
  IsRetract (funOf Ycomb (graph F))

```

The seven-tag syntax functor of (4.44) is

Lean 4 source

```

def expF (z : Pomega) : Pomega :=
  plus7 intR botElem z z (tensor4 z z z z) (tensorR z z) (tensorR intR z)

def expR : Pomega := funOf Ycomb (graph expF)

```

and `eq_4_44` is the unfolding `expR = expF expR`.

6.5 Equation (4.45) — the continuous decoder $\mathcal{H}$

Scott asks why $\mathcal{H}$ exists, and answers: because of the fixed-point theorem. Rewrite (4.43) by cases on the abstract syntax (4.44). The resulting operator on $\mathbf{P}\omega^{\mathbf{exp}}$ is continuous, so it has a least fixed point, and

$$(4.45) \quad \mathcal{H} : \mathbf{exp} \rightarrow (\mathbf{env} \rightarrow \mathbf{lamb})$$

is computable.

An earlier packaging defined `Hcomb` as the retract of the *union of the graphs of the typed interpreters* `Htyped` τ . That object is typed $\mathbf{exp} \rightarrow (\mathbf{env} \rightarrow \mathbf{lamb})$, but it is not a continuous decoder: `encodeExp` τ is an infinite graph, so `funOf` of a union of finite-support graphs need not recover `Htyped` τ .

The completed construction follows (4.46) and the paper’s Y-argument. One continuous step `Hstep` H e t dispatches on the (4.44) tag of e with the same seven-way `dcondSet` used by `plus7`. Recursive calls are `hApply` H e $t = (H \cdot e) \cdot t$. The abstraction clause cannot test `m = idx` in the index, because equality of codes is not Scott-continuous in `idx`. Instead the environment update is extended by `minExtend`:

Lean 4 source

```
def updateEnvUnion (t x idx : Pomega) : Pomega :=
  minExtend (fun n => updateEnv t x n) idx
```

On a singleton index this is Scott’s $t[x/n]$:

Lean 4 source

```
theorem updateEnvUnion_ofNat (t x : Pomega) (n : Nat) :
  updateEnvUnion t x (ofNat n) = updateEnv t x n
```

The operator and its least fixed point are

Lean 4 source

```
def HF (H : Pomega) : Pomega :=
  graph (fun e => graph (fun t => Hstep H e t))

def Hfun : Pomega := fix HF

def Hcomb : Pomega :=
  funOf (arrowR expR (arrowR envR lambR)) Hfun
```

`HF` is continuous in H because each clause is continuous in the recursive calls (Theorem 1.3). Therefore `Hfun` = `HF` `Hfun`. Induction on `LambTerm` gives `Hfun` (`encodeExp` τ) t = `Hinterp` τ t , hence `Hfun` (`encodeExp` τ) = `graph` (`Hinterp` τ). Encoded terms are typed on `exp`, so retracting onto the function space decodes them:

Lean 4 source

```
theorem eq_4_45 (tau : LambTerm) :
  typed (encodeExp tau) expR /\
  typed (Htyped tau) (arrowR envR lambR) /\
  funOf Hcomb (encodeExp tau) = Htyped tau
```

A closed combinatory term for `HF` (in the style of `vaalStepTerm`) is not required for (4.45): the paper’s existence argument is Y of a continuous operator, and `Hcomb` is that least fixed point viewed as a map of retracts. Computability of $\mathcal{H}$ is then Theorem 2.6 plus continuity of `HF`.

6.6 Theorems 5.1–5.6 — closures and V

A closure is a retract containing I . Theorem 5.1: the fixed points form an algebraic lattice whose compact elements are the $a(e_n)$. Theorem 5.2 represents every countable algebraic lattice as the range of a closure. Theorem 5.3 places $\circ \rightarrow$ among closures. Theorem 5.4: the product $\boxtimes$ and the sum $\boxplus$ of closures are closures, and both are typed on V . The displayed (5.13) is the occupancy-tag formula $([u]_0 \supset 0, 0) \cup ([u]_1 \supset 1, 1) \sqsubset [a'([u]_0), \perp], [\perp, b'([u]_1)]$, not the earlier OCR misread that dispatched on $[u]_0$ alone.

Lean 4 source

```
theorem theorem_5_4_plus {a b : Pomega} (ha : IsClosure a) (hb : IsClosure b) :
  IsClosure (boxPlus a b)
```

Theorem 5.5: V is a closure, and $V(a) = a$ if and only if a is a closure. Theorem 5.6: Y and $\circ \rightarrow$ are typed on $\$V$.

6.7 Theorems 6.1–6.7 — classification

The classes $\mathfrak{G}$, $\mathfrak{F}$, $\mathfrak{B}$ and their δ -refinements are defined by continuous preimages of typical sets (Table 3). Compared `theorem_6_5` is Scott's $\mathfrak{F} \cap \mathfrak{G}_\delta$ characterization specialized to the representative target `succSet topElem`, not the fully parameterized form over every infinite proper subset of $\top$. Theorem 6.7 is the equalizer characterization of $\mathfrak{B}_\delta$:

Lean 4 source

```
theorem theorem_6_7 :
  forall U, IsBdelta U <=>
    exists f g, IsScottContinuous f /\ IsScottContinuous g /\
      U = {x | f x = g x}
```

6.8 Theorems 7.1–7.4 — restricted equivalences

$\text{Ea } a$ is the identity equivalence on the range of a ; it is isomorphic to the kernel equivalence $\text{kerE } a$. Theorem 7.2 packages the function-space, product, and sum identities, including the extra $\{\perp, \top\}$ summands on $\oplus$:

Lean 4 source

```
theorem theorem_7_2 {a b : Pomega} (ha : IsRetract a) (hb : IsRetract b) :
  (forall x y, funOf a x = funOf a y <=> (Ea a).rel (funOf a x) (funOf a y)) /\
  (forall f g, ... E_{a comp -> b} ...) /\
  (forall u v, (Ea (tensorR a b)).rel u v <=> (prodE (Ea a) (Ea b)).rel u v) /\
  (forall u v, (Ea (plusR a b)).rel u v <=>
    (sumE (Ea a) (Ea b)).rel u v \/\
    (u = botElem /\ v = botElem) \/\ (u = topElem /\ v = topElem))
```

Theorem 7.3 places I, K, S in the appropriate function spaces. Theorem 7.4 characterizes the iterators Z_n .

7 Source fidelity and remaining notes

Working source: [sources/Data_Types_as_Lattices_vision.md](#), a transcription of [sources/Data_Types_as_Lattices.pdf](#). See NOTICE and [sources/README.md](#) for copyright carve-outs.

Recorded divergences and limitations:

- Comparator selects the 63 theorem declarations and 70 locked definitions named in `comparator.json`. A match establishes those selected statements, not every informal clause of every numbered theorem.
- Compared substitution is `theorem_1_3` (unary composition), `theorem_1_3_tuple` (binary), and `theorem_1_3_nary` (ternary), not arbitrary finite-arity substitution.
- `theorem_1_5` proves continuity of `extend f` for every f , a strengthening of Scott’s hypothesis that f is continuous; `theorem_1_5_extends` restores that hypothesis for agreement on the subspace.
- Theorem 1.6 concerns countably based T_0 topological spaces, not countable partial orders with directed suprema.
- `theorem_2_2` is a conditional semantic congruence: it assumes the renamed bodies already have equal interpretations and lifts that equality through lambda. It is not source-level α -conversion from a freshness hypothesis.
- `theorem_4_6_limit` is an inclusion-preserving bijection with the inverse limit (an order isomorphism). Comparator does not check a homeomorphism.
- `theorem_6_5` is the specialization of Scott’s parameterized $\mathfrak{F} \cap \mathfrak{G}_\delta$ theorem to the representative target `succSet topElem`.
- `Ea a` is the identity equivalence on the range of a ; it is isomorphic to the kernel equivalence `kerE a`. The kernel relation is $\{(x, y) \mid a(x) = a(y)\}$.
- The locked coproduct `plusR` uses the doubly strict conditional `dcondSet` of (4.4), not the ordinary McCarthy conditional written in displayed (4.10). Mixed tags map to $\top$ rather than the union of the two injections.
- Theorem 4.5 packages the four numbered sum identities. Scott’s informal remark that the coproduct mediator is not unique is not a numbered theorem and is omitted.
- No external mathematical review has been performed. Every proof is checked by the Lean kernel, but the project remains self-assessed.

8 Palomar statement of record

`Challenge.lean` contains Mathlib-only declarations with deliberate theorem holes. `Solution.lean` imports the completed library. `comparator.json` compares the 63 selected theorem declarations and 70 locked definitions named in `comparator.json`.

File	Role
<code>Challenge.lean</code>	Mathlib-only statement of record with deliberate <code>sorry</code>
<code>Solution.lean</code>	Re-exports matching kernel-checked declarations
<code>comparator.json</code>	Compared theorem/definition names and permitted axioms
<code>formalization.yaml</code>	Scope, source alignment, fidelity, and review metadata
<code>PROVENANCE.md</code>	Standalone status and relation to sibling Scott projects

A Comparator match establishes only the selected `comparator.json` names. Further library companions are not all compared. Equation (4.45) is library-complete and is not a Palomar-compared name. `Solution.lean` and every file below `Scott1976/` must remain sorry-free.

9 Build and preflight

The repository pins Lean and mathlib **v4.33.0**.

```
lake exe cache get
lake build
bash scripts/palomar_preflight.sh --mechanical-only # CI / routine
bash scripts/palomar_preflight.sh # before Palomar submission
bash scripts/generate_arxiv_with_code.sh # -> arxiv_with_code.md
```

`lake build` checks the `Scott1976`, `Challenge`, and `Solution` targets. Mechanical preflight validates packaging, builds the project, compares Challenge/Solution declaration types and closure values, runs Palomar’s pinned Comparator, scans completed sources for proof holes, and checks permitted axioms.

`arxiv_with_code.md` is a generated review artifact: this narrative followed by Appendix A, the complete Lean source of every file listed in `scripts/generate_arxiv_with_code.py`. It is gitignored and should be regenerated whenever `arxiv.md` or a listed source file changes.

10 License and source PDF

Original Lean code and author-written documentation are Apache-2.0. `sources/Data_Types_as_Lattices.pdf` and its transcription are not Apache-2.0; see NOTICE and `sources/README.md` for the copyright carve-out.

- [Cur26] Anyosphere, Inc. *Cursor: AI-native code editor and agent environment*. <https://cursor.com> (accessed 2026).
- [Cmp25] Anyosphere, Inc. *Composer 2.5*. Model announcement and documentation, <https://cursor.com/blog/composer-2-5>; model card as integrated in Cursor, <https://cursor.com/docs/models> (accessed 2026).
- [Son26] Anthropic. *Claude Sonnet 5* (medium reasoning variant). System card, <https://www.anthropic.com/claude-sonnet-5-system-card>; model documentation as integrated in Cursor, <https://cursor.com/docs/models> (accessed 2026).
- [Ant26] Anthropic. *Claude Opus 4.8* (high thinking/reasoning variant). System card and announcement, <https://www.anthropic.com/news/claude-opus-4-8>; model documentation as integrated in Cursor, <https://cursor.com/docs/models/claude-opus-4-8> (accessed 2026).

A Complete Lean source

Role	File
Root import graph	<code>Scott1976.lean</code>
§1 domain $P\omega$	<code>Scott1976/DataTypesAsLattices/Pomega.lean</code>
§1 continuity	<code>Scott1976/DataTypesAsLattices/Continuous.lean</code>

Role	File
§1 graphs	Scott1976/DataTypesAsLattices/Graph.lean
§1 least fixed points	Scott1976/DataTypesAsLattices/FixedPoint.lean
§1 embeddings	Scott1976/DataTypesAsLattices/Embedding.lean
§2 LAMBDA	Scott1976/DataTypesAsLattices/Lambda.lean
§2 computability	Scott1976/DataTypesAsLattices/Computability.lean
§3 enumeration	Scott1976/DataTypesAsLattices/Enumeration.lean
Algebraic/continuous lattices	Scott1976/DataTypesAsLattices/FixedLattices.lean
§4 retracts	Scott1976/DataTypesAsLattices/Retracts.lean
§5 closures	Scott1976/DataTypesAsLattices/Closures.lean
§6 classification	Scott1976/DataTypesAsLattices/Classification.lean
§4 (4.38)–(4.45) and §7 functionality	Scott1976/DataTypesAsLattices/Functionality.lean
Library facade	Scott1976/DataTypesAsLattices/Basic.lean

Primary source (PDF): [sources/Data_Types_as_Lattices.pdf](#) — Dana S. Scott, *Data Types as Lattices* (PRG-5 / SIAM J. Comput. 5, 1976).

Files appear in `Scott1976.lean` import order. Each block is a verbatim copy of the repository file at generation time.

A.1 Scott1976.lean

19 lines.

Lean 4 source

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
Github: https://github.com/catskillsresearch/scott1976
-/

import Scott1976.DataTypesAsLattices.Pomega
import Scott1976.DataTypesAsLattices.Continuous
import Scott1976.DataTypesAsLattices.Graph
import Scott1976.DataTypesAsLattices.FixedPoint
import Scott1976.DataTypesAsLattices.Embedding
import Scott1976.DataTypesAsLattices.Lambda
import Scott1976.DataTypesAsLattices.Computability
import Scott1976.DataTypesAsLattices.Enumeration
import Scott1976.DataTypesAsLattices.Retracts
import Scott1976.DataTypesAsLattices.Closures
import Scott1976.DataTypesAsLattices.Classification
import Scott1976.DataTypesAsLattices.Functionality

```

A.2 Scott1976/DataTypesAsLattices/Pomega.lean

279 lines.

Lean 4 source

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/
import Mathlib.Data.Nat.Bitwise

```

```

import Mathlib.Data.Set.Finite.Basic
import Mathlib.Data.Set.Lattice

/-!
# Scott 1976, S1 -- the universal domain `P?`

Ground truth: `sources/Data_Types_as_Lattices_vision.md`, pages 5-7.
-/

namespace Scott1976.DataTypesAsLattices

/-- **Scott 1976, S1.** `P? = {x | x subseteq ?}`. -/
abbrev Pomega := Set Nat

/-- **Scott 1976, after (2.2).** `False = {}`. -/
def botElem : Pomega := {}

/-- **Scott 1976, after (2.2).** `top = ?`. -/
def topElem : Pomega := Set.univ

@[simp] theorem mem_botElem (n : Nat) : n in botElem <-> False := by simp [botElem]
@[simp] theorem mem_topElem (n : Nat) : n in topElem := Set.mem_univ n

/-- **Scott 1976, S1.** Finite set coded by the binary expansion of `n`. -/
def e (n : Nat) : Pomega := {k | n.testBit k}

@[simp] theorem mem_e {n k : Nat} : k in e n <-> n.testBit k := Iff.rfl

theorem e_zero : e 0 = {} := by
  ext k
  simp [e]

theorem two_pow_le_of_testBit {n k : Nat} (h : n.testBit k) : 2 ^ k <= n := by
  have hmod : (n >>> k) % 2 = 1 := by simpa [Nat.testBit] using h
  have hpos : 0 < n >>> k := Nat.pos_of_ne_zero fun hz => by simp [hz] at hmod
  have hdiv : 1 <= n / 2 ^ k := by
    rwa [Nat.shiftRight_eq_div_pow] at hpos
  simpa using (Nat.le_div_iff_mul_le (Nat.two_pow_pos k)).mp hdiv

theorem le_two_pow (k : Nat) : k <= 2 ^ k := by
  induction k with
  | zero => decide
  | succ k ih =>
    calc
    k + 1 <= 2 ^ k + 1 := Nat.succ_le_succ ih
    _ <= 2 ^ k + 2 ^ k := Nat.add_le_add_left Nat.one_le_two_pow _
    _ = 2 ^ k * 2 := (Nat.mul_two (2 ^ k)).symm
    _ = 2 ^ (k + 1) := (Nat.pow_succ 2 k).symm

theorem lt_two_pow' (k : Nat) : k < 2 ^ k := by
  induction k with
  | zero => decide
  | succ k ih =>
    calc
    k + 1 <= 2 ^ k := Nat.succ_le_of_lt ih
    _ < 2 ^ k + 2 ^ k := Nat.lt_add_of_pos_right (Nat.two_pow_pos k)
    _ = 2 ^ (k + 1) := by rw [ <- Nat.two_mul, Nat.mul_comm, Nat.pow_succ]

theorem mem_e_le {n k : Nat} (h : k in e n) : k <= n :=
  (le_two_pow k).trans (two_pow_le_of_testBit h)

/-- **Scott 1976, S1.** `k in e_n` implies `k < n`. -/
theorem mem_e_lt {n k : Nat} (h : k in e n) : k < n := by

```

```

have hle := mem_e_le h
rcases eq_or_lt_of_le hle with rfl | hlt
* exact (lt_irrefl k ((lt_two_pow' k).trans_le (two_pow_le_of_testBit h))).elim
* exact hlt

instance (n k : Nat) : Decidable (k in e n) :=
  inferInstanceAs (Decidable (n.testBit k))

instance (n m : Nat) : Decidable (e n subseq e m) :=
  decidable_of_iff (forall k <= n, k in e n -> k in e m) <
    fun h k hk => h k (mem_e_le hk) hk,
    fun h _k _ hk => h hk>

theorem e_finite (n : Nat) : (e n).Finite :=
  (Finset.range (n + 1)).finite_toSet.subset fun _k hk =>
    Finset.mem_range.mpr (Nat.lt_succ_of_le (mem_e_le hk))

theorem e_pow2 (k : Nat) : e (2 ^ k) = {k} := by
  ext i
  simp [e, Nat.testBit_two_pow]

theorem singleton_eq_e (k : Nat) : ({k} : Pomega) = e (2 ^ k) := (e_pow2 k).symm

/-- Finite pieces of `x` used in directed unions. -/
def eBelow (x : Pomega) (n : Nat) : Pomega :=
  {k | e n subseq x /\ k in e n}

theorem union_e_eq (x : Pomega) : (? n, eBelow x n) = x := by
  ext k
  constructor
  * intro hk
    obtain <n, hn, hke> := Set.mem_iUnion.mp hk
    exact hn hke
  * intro hk
    refine Set.mem_iUnion.mpr <2 ^ k, ?_>
    simp [eBelow, e_pow2, Set.singleton_subset_iff, hk]

theorem exists_e_mem {x : Pomega} {k : Nat} (hk : k in x) :
  exists n, e n subseq x /\ k in e n :=
  <2 ^ k, by simp [e_pow2, Set.singleton_subset_iff, hk], by simp [e_pow2]>

theorem e_or (n m : Nat) : e (n ||| m) = e n U e m := by
  ext k
  simp [e, Nat.testBit_or]

theorem e_or_of_subset {n m : Nat} {x : Pomega} (hn : e n subseq x) (hm : e m subseq x) :
  :
  e (n ||| m) subseq x := by
  rw [e_or]
  exact Set.union_subset hn hm

/-- Bit-mask code of a finite list of naturals. -/
def codeList : List Nat -> Nat
| [] => 0
| k :: ks => 2 ^ k ||| codeList ks

theorem e_codeList (ks : List Nat) : e (codeList ks) = {k | k in ks} := by
  induction ks with
  | nil => simp [codeList, e_zero]
  | cons k ks ih =>
    ext i
    simp [codeList, e_or, e_pow2, ih]

```

```

noncomputable def codeFinset (s : Finset Nat) : Nat := codeList s.val.toList

theorem e_codeFinset (s : Finset Nat) : e (codeFinset s) = (s : Set Nat) := by
  ext k
  simp [codeFinset, e_codeList]

theorem exists_code (s : Finset Nat) : exists n, e n = (s : Set Nat) :=
  <codeFinset s, e_codeFinset s>

theorem exists_code_of_finite {s : Pomega} (hs : s.Finite) :
  exists n, e n = s := by
  obtain <t, ht> := hs.exists_finset_coe
  exact <codeFinset t, ht |> e_codeFinset t>

/-- **Scott 1976, S1.** Diagonal pairing  $\langle n, m \rangle = \frac{(n+m)(n+m+1)}{2} + m$ . -/
def pair (n m : Nat) : Nat := (n + m) * (n + m + 1) / 2 + m

def triangle (w : Nat) : Nat := w * (w + 1) / 2

theorem pair_eq_triangle (n m : Nat) : pair n m = triangle (n + m) + m := rfl

theorem triangle_succ (w : Nat) : triangle (w + 1) = triangle w + (w + 1) := by
  have hex : (w + 1) * (w + 2) = w * (w + 1) + 2 * (w + 1) := by
    calc
      (w + 1) * (w + 2) = (w + 1) * w + (w + 1) * 2 := Nat.mul_add _ _
      _ = w * (w + 1) + 2 * (w + 1) := by
        rw [Nat.mul_comm (w + 1) w, Nat.mul_comm (w + 1) 2]
  simp only [triangle]
  rw [show (w + 1) * ((w + 1) + 1) = (w + 1) * (w + 2) from rfl, hex]
  exact Nat.add_mul_div_left _ _ (by decide : 0 < 2)

theorem triangle_le_of_le {a b : Nat} (h : a <= b) : triangle a <= triangle b := by
  induction h with
  | refl => exact le_rfl
  | step h ih =>
    rw [triangle_succ]
    exact le_trans ih (Nat.le_add_right _ _)

theorem triangle_lt_of_lt {a b : Nat} (h : a < b) : triangle a < triangle b := by
  have : a + 1 <= b := Nat.succ_le_of_lt h
  calc
    triangle a < triangle a + (a + 1) := Nat.lt_add_of_pos_right (Nat.succ_pos _)
    _ = triangle (a + 1) := (triangle_succ a).symm
    _ <= triangle b := triangle_le_of_le this

theorem triangle_le_pair (n m : Nat) :
  triangle (n + m) <= pair n m /\ pair n m < triangle (n + m + 1) := by
  constructor
  * exact Nat.le_add_right _ _
  * rw [triangle_succ]
    exact Nat.add_lt_add_left (Nat.lt_succ_of_le (Nat.le_add_left m n)) _

theorem pair_inj {n_1 m_1 n_2 m_2 : Nat} (h : pair n_1 m_1 = pair n_2 m_2) :
  n_1 = n_2 /\ m_1 = m_2 := by
  have h1 := triangle_le_pair n_1 m_1
  have h2 := triangle_le_pair n_2 m_2
  have hw : n_1 + m_1 = n_2 + m_2 := by
    rcases lt_trichotomy (n_1 + m_1) (n_2 + m_2) with hlt | heq | hgt
    * have hle : triangle (n_1 + m_1 + 1) <= triangle (n_2 + m_2) :=
      triangle_le_of_le (Nat.succ_le_of_lt hlt)
    have : pair n_1 m_1 < pair n_1 m_1 :=
      calc
        pair n_1 m_1 < triangle (n_1 + m_1 + 1) := h1.2

```

```

    _ <= triangle (n_2 + m_2) := hle
    _ <= pair n_2 m_2 := h2.1
    _ = pair n_1 m_1 := h.symm
  exact (lt_irrefl _ this).elim
* exact heq
* have hle : triangle (n_2 + m_2 + 1) <= triangle (n_1 + m_1) :=
  triangle_le_of_le (Nat.succ_le_of_lt hgt)
  have : pair n_2 m_2 < pair n_2 m_2 :=
    calc
      pair n_2 m_2 < triangle (n_2 + m_2 + 1) := h2.2
      _ <= triangle (n_1 + m_1) := hle
      _ <= pair n_1 m_1 := h1.1
      _ = pair n_2 m_2 := h
  exact (lt_irrefl _ this).elim
have hm : m_1 = m_2 := by
  have : triangle (n_1 + m_1) + m_1 = triangle (n_2 + m_2) + m_2 := h
  rw [hw] at this
  exact Nat.add_left_cancel this
have hn : n_1 = n_2 := Nat.add_right_cancel (hw.trans (by rw [hm]))
exact <hn, hm>

theorem pair_le_left (n m : Nat) : n <= pair n m := by
  have htri : n <= triangle (n + m) := by
    cases n with
    | zero => exact Nat.zero_le _
    | succ n =>
      have hmul : n.succ * 2 <= (n.succ + m) * (n.succ + m + 1) :=
        Nat.mul_le_mul
          (Nat.le_add_right n.succ m)
          (Nat.succ_le_succ
            (Nat.le_trans (Nat.succ_le_succ (Nat.zero_le n)) (Nat.le_add_right n.succ m)))
      exact (Nat.le_div_iff_mul_le (by decide : 0 < 2)).mpr hmul
  exact htri.trans (Nat.le_add_right _ _)

theorem pair_le_right (n m : Nat) : m <= pair n m :=
  Nat.le_add_left _ _

theorem exists_triangle_bucket (k : Nat) :
  exists w, triangle w <= k /\ k < triangle (w + 1) := by
  let P := fun w : Nat => k < triangle (w + 1)
  have hP : exists w, P w := <k, by
    change k < triangle (k + 1)
    rw [triangle_succ]
    exact lt_of_lt_of_le (Nat.lt_succ_self k) (Nat.le_add_left (k + 1) _)>
  let w := Nat.find hP
  refine <w, ?, Nat.find_spec hP>
  cases hw : w with
  | zero => exact Nat.zero_le k
  | succ w' =>
    have hmin : not P w' :=
      Nat.find_min hP (Nat.lt_of_succ_le (by
        have : w = Nat.find hP := rfl
        rw [← this, hw]))
    exact Nat.le_of_not_gt hmin

theorem exists_pair (k : Nat) : exists n m, pair n m = k := by
  obtain <w, hle, hlt> := exists_triangle_bucket k
  refine <w - (k - triangle w), k - triangle w, ?_>
  have hlt' : k < triangle w + w + 1 := by
    have : k < triangle w + (w + 1) := by rwa [triangle_succ] at hlt
    exact Nat.add_assoc (triangle w) w 1 |> this
  have hk : k <= triangle w + w := Nat.lt_succ_iff.mpr hlt'
  have hm : k - triangle w <= w :=

```

```

    Nat.le_of_add_le_add_left ((Nat.add_sub_of_le hle).symm |> hk)
  have : w - (k - triangle w) + (k - triangle w) = w := Nat.sub_add_cancel hm
  rw [pair_eq_triangle, this, Nat.add_sub_of_le hle]

/-- Inverse of Cantor pairing. -/
noncomputable def unpair (k : Nat) : Nat x Nat :=
  ((exists_pair k).choose, (exists_pair k).choose_spec.choose)

theorem pair_unpair (k : Nat) : pair (unpair k).1 (unpair k).2 = k :=
  (exists_pair k).choose_spec.choose_spec

theorem unpair_pair (n m : Nat) : unpair (pair n m) = (n, m) := by
  have h := pair_unpair (pair n m)
  exact Prod.ext (pair_inj h).1 (pair_inj h).2

theorem pair_lt_left (n m : Nat) : n < pair n m + 1 :=
  Nat.lt_succ_of_le (pair_le_left n m)

theorem pair_lt_right (n m : Nat) : m < pair n m + 1 :=
  Nat.lt_succ_of_le (pair_le_right n m)

end Scott1976.DataTypesAsLattices

```

A.3 Scott1976/DataTypesAsLattices/Continuous.lean

267 lines.

Lean 4 source

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/
import Mathlib.Topology.Bases
import Mathlib.Topology.Order
import Scott1976.DataTypesAsLattices.Pomega

/-!
# Scott 1976, S1 -- Scott topology and continuous maps on `P?`

Definitions of basic neighbourhoods, open sets, and Scott continuity,
plus Theorem 1.1 (characterization).
-/

namespace Scott1976.DataTypesAsLattices

open TopologicalSpace

/-- **Scott 1976, S1, Definition.** A basic neighbourhood is
`{x in P? | e n subseteq x}` for some finite code `n`. -/
def basicNhhd (n : Nat) : Set Pomega := {x | e n subseteq x}

/-- **Scott 1976, S1, Definition.** An open set is a union of basic neighbourhoods. -/
def IsScottOpen (U : Set Pomega) : Prop :=
  exists B : Set Nat, U = ? n in B, basicNhhd n

/-- Directed union of `f` on finite subsets of `x`. -/
def scottPiece (f : Pomega -> Pomega) (x : Pomega) (n : Nat) : Pomega :=
  {k | e n subseteq x /\ k in f (e n)}

def scottUnion (f : Pomega -> Pomega) (x : Pomega) : Pomega :=

```

```

? n, scottPiece f x n

/-- **Scott 1976, S1, Definition.** `f : P? -> P?` is continuous iff
`f(x) = ? {f(e n) | e n subseq x}`. -/
def IsScottContinuous (f : Pomega -> Pomega) : Prop :=
  forall x, f x = scottUnion f x

theorem isScottOpen_basic (n : Nat) : IsScottOpen (basicNhhd n) :=
  <{n}, by ext x; simp [basicNhhd]>

/-- Open sets are upper sets: if `x` in `U` and `x subseq y` then `y` in `U`. -/
theorem isScottOpen_isUpper {U : Set Pomega} (hU : IsScottOpen U)
  {x y : Pomega} (hx : x in U) (hxy : x subseq y) : y in U := by
  obtain <B, rfl> := hU
  obtain <n, hn, hxn> := Set.mem_iUnion_2.mp hx
  exact Set.mem_iUnion_2.mpr <n, hn, subset_trans hxn hxy>

theorem mem_scottUnion {f : Pomega -> Pomega} {x : Pomega} {k : Nat} :
  k in scottUnion f x <-> exists n, e n subseq x /\ k in f (e n) := by
  constructor
  * intro hk
    obtain <n, hn, hfk> := Set.mem_iUnion.mp hk
    exact <n, hn, hfk>
  * intro <n, hn, hk>
    exact Set.mem_iUnion.mpr <n, hn, hk>

theorem isScottContinuous_monotone {f : Pomega -> Pomega}
  (hf : IsScottContinuous f) {x y : Pomega} (h : x subseq y) : f x subseq f y := by
  intro m hm
  rw [hf x, mem_scottUnion] at hm
  rw [hf y, mem_scottUnion]
  obtain <n, hn, hmn> := hm
  exact <n, subset_trans hn h, hmn>

/-- If each element of a finite set is realized at some `e n subseq x`, the
bitwise-OR of those codes realizes the whole finite set (using monotonicity). -/
theorem exists_e_cover_finite {f : Pomega -> Pomega} (hf : IsScottContinuous f)
  {x : Pomega} (s : Finset Nat)
  (h : forall k in s, exists n, e n subseq x /\ k in f (e n)) :
  exists N, e N subseq x /\ (s : Set Nat) subseq f (e N) := by
  induction s using Finset.induction with
  | empty => exact <0, by simp [e_zero], by simp>
  | insert k s hks ih =>
    obtain <N, hN, hs> := ih fun j hj => h j (Finset.mem_insert_of_mem hj)
    obtain <n, hn, hk> := h k (Finset.mem_insert_self _ _)
    refine <n ||| N, e_or_of_subset hn hN, ?_>
    intro j hj
    rw [Finset.coe_insert, Set.mem_insert_iff] at hj
    rcases hj with rfl | hj
    * have : e n subseq e (n ||| N) := by rw [e_or]; exact Set.subset_union_left
      exact isScottContinuous_monotone hf this hk
    * have : e N subseq e (n ||| N) := by rw [e_or]; exact Set.subset_union_right
      exact isScottContinuous_monotone hf this (hs hj)

/-- **Scott 1976, Theorem 1.1 (The characterization theorem).**
`f` is continuous iff `e m subseq f(x)` just when some finite `e n subseq x` already
satisfies `e m subseq f(e n)`. -/
theorem theorem_1_1 (f : Pomega -> Pomega) :
  IsScottContinuous f <->
    forall x m, e m subseq f x <-> exists n, e n subseq x /\ e m subseq f (
      e n) := by
  constructor
  * intro hf x m

```

```

constructor
* intro hmf
  have : forall k in e m, exists n, e n subseq x /\ k in f (e n) := by
    intro k hk
    have : k in scottUnion f x := by
      rw [ <- hf x ]; exact hmf hk
    exact mem_scottUnion.mp this
  obtain <s, hs> := (e_finite m).exists_finset_coe
  obtain <N, hn, hsf> := exists_e_cover_finite hf s (fun k hk =>
    this k (by
      have : k in (s : Set Nat) := hk
      rwa [hs] at this))
  exact <N, hn, by simp [hs] using hsf>
* intro <n, hn, hmf>
  exact subset_trans hmf (isScottContinuous_monotone hf hn)
* intro h x
  ext k
  constructor
* intro hk
  have : e (2 ^ k) subseq f x := by
    simp [e_pow2, Set.singleton_subset_iff, hk]
  obtain <n, hn, hkn> := (h x (2 ^ k)).mp this
  refine mem_scottUnion.mpr <n, hn, ?_>
  simp [e_pow2, Set.singleton_subset_iff] using hkn
* intro hk
  obtain <n, hn, hkn> := mem_scottUnion.mp hk
  have : e (2 ^ k) subseq f (e n) := by
    simp [e_pow2, Set.singleton_subset_iff, hkn]
  have : e (2 ^ k) subseq f x := (h x (2 ^ k)).mpr <n, hn, this>
  simp [e_pow2, Set.singleton_subset_iff] using this

/-- Continuous functions are determined by their values on finite sets. -/
theorem isScottContinuous_determined {f g : Pomega -> Pomega}
  (hf : IsScottContinuous f) (hg : IsScottContinuous g)
  (hfin : forall n, f (e n) = g (e n)) : f = g := by
  funext x
  rw [hf x, hg x]
  simp [scottUnion, scottPiece, hfin]

/-- Subbasic open `{x | k in x}` of the positive topology. -/
def memOpen (k : Nat) : Set Pomega := {x | k in x}

/-- **Scott 1976, S1.** The positive (?information?) topology on `P?`,
generated by the sets `{x | k in x}`. -/
instance : TopologicalSpace Pomega :=
  .generateFrom (Set.range memOpen)

theorem isOpen_memOpen (k : Nat) : IsOpen (memOpen k) :=
  TopologicalSpace.isOpen_generateFrom_of_mem <k, rfl>

/-- A basic neighbourhood is a finite intersection of subbasic opens. -/
theorem basicNhhd_eq_iInter (n : Nat) :
  basicNhhd n = ? k in e n, memOpen k := by
  ext x
  simp [basicNhhd, memOpen, Set.subset_def]

theorem isOpen_basicNhhd (n : Nat) : IsOpen (basicNhhd n) := by
  obtain <s, hs> := (e_finite n).exists_finset_coe
  have h : basicNhhd n = ? k in s, memOpen k := by
    ext x
    constructor
  * intro hx
    refine Set.mem_iInter_2.mpr ?_

```



```

    intro k hk
    have : k in e n := by
      have : k in (s : Set Nat) := hk
      rwa [hs] at this
    exact hx this
  * intro hx k hk
    have : k in s := by
      have : k in e n := hk
      rwa [← hs] at this
    exact Set.mem_iInter_2.mp hx k this
rw [h]
exact isOpen_biInter_finset fun _ => isOpen_memOpen _

theorem basicNhhd_inter (n m : Nat) :
  basicNhhd n ∩ basicNhhd m = basicNhhd (n ||| m) := by
  ext x
  simp [basicNhhd, e_or, Set.union_subset_iff]

theorem basicNhhd_zero : basicNhhd 0 = Set.univ := by
  ext x
  simp [basicNhhd, e_zero]

theorem memOpen_eq_basicNhhd (k : Nat) : memOpen k = basicNhhd (2 ^ k) := by
  ext x
  simp [memOpen, basicNhhd, e_pow2, Set.singleton_subset_iff]

/-- Every open neighbourhood of `x` contains a basic neighbourhood of `x`. -/
theorem exists_basicNhhd_subset_of_generateOpen {U : Set Pomega}
  (hU : GenerateOpen (Set.range memOpen) U) {x : Pomega} (hx : x in U) :
  exists n, e n subseq x /\ basicNhhd n subseq U := by
  induction hU generalizing x with
  | basic s hs =>
    obtain <k, rfl> := hs
    refine <2 ^ k, ?_, ?_>
    * simp [memOpen, e_pow2, Set.singleton_subset_iff] using hx
    * rw [← memOpen_eq_basicNhhd]
  | univ =>
    exact <0, by simp [e_zero], by simp [basicNhhd_zero]>
  | inter _s _t _hs _ht ihs iht =>
    obtain <n, hn, hnU> := ihs hx.1
    obtain <m, hm, hmU> := iht hx.2
    refine <n ||| m, e_or_of_subset hn hm, ?_>
    rw [← basicNhhd_inter]
    exact Set.inter_subset_inter hnU hmU
  | sUnion S _hS ih =>
    obtain <V, hV, hV> := hx
    obtain <n, hn, hnV> := ih V hV hV
    exact <n, hn, hnV.trans (Set.subset_sUnion_of_mem hV)>

/-- **Scott 1976, S1.** Scott-open sets are exactly the opens of the
positive information topology. -/
theorem isScottOpen_iff_isOpen (U : Set Pomega) : IsScottOpen U <-> IsOpen U := by
  constructor
  * intro <B, hU>
    rw [hU]
    exact isOpen_biUnion fun n => isOpen_basicNhhd n
  * intro hU
    refine <{n | basicNhhd n subseq U}, ?_>
    ext x
    constructor
    * intro hx
      have hgen : GenerateOpen (Set.range memOpen) U := hU
      obtain <n, hn, hsub> := exists_basicNhhd_subset_of_generateOpen hgen hx

```

```

    exact Set.mem_iUnion_2.mpr <n, hsub, hn>
* intro hx
  obtain <n, hn, hxn> := Set.mem_iUnion_2.mp hx
  exact hn hxn

/-- Scott continuity coincides with topological continuity `P? -> P?`. -/
theorem isScottContinuous_iff_continuous (f : Pomega -> Pomega) :
  IsScottContinuous f <-> Continuous f := by
  constructor
* intro hf
  refine continuous_generateFrom_iff.2 ?_
  rintro _ <k, rfl>
  rw [ <- isScottOpen_iff_isOpen ]
  refine <{n | k in f (e n)}, ?_>
  ext x
  constructor
* intro hx
  have : k in scottUnion f x := by rwa [ <- hf x ]
  obtain <n, hn, hkn> := mem_scottUnion.mp this
  exact Set.mem_iUnion_2.mpr <n, hkn, hn>
* intro hx
  obtain <n, hkn, hn> := Set.mem_iUnion_2.mp hx
  exact isScottContinuous_monotone hf hn hkn
* intro hfcont x
  ext k
  have hopen : IsScottOpen (f ^-1' memOpen k) :=
    (isScottOpen_iff_isOpen _).mpr (IsOpen.preimage hfcont (isOpen_memOpen k))
  constructor
* intro hk
  obtain <B, hB> := hopen
  have hx : x in ? n in B, basicNhhd n := by
    have : x in f ^-1' memOpen k := hk
    rwa [hB] at this
  obtain <n, hn, hxn> := Set.mem_iUnion_2.mp hx
  have hen : k in f (e n) := by
    have : e n in f ^-1' memOpen k := by
      rw [hB]
    exact Set.mem_iUnion_2.mpr <n, hn, (subset_rfl : e n subseteq e n)>
    exact this
  exact mem_scottUnion.mpr <n, hxn, hen>
* intro hk
  obtain <n, hn, hkn> := mem_scottUnion.mp hk
  have : e n in f ^-1' memOpen k := hkn
  exact isScottOpen_isUpper hopen this hn
end Scott1976.DataTypesAsLattices

```

A.4 Scott1976/DataTypesAsLattices/Graph.lean

126 lines.

Lean 4 source

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/
import Scott1976.DataTypesAsLattices.Continuous

/-!
# Scott 1976, S1 -- graphs of continuous functions

```

```
`graph` / `fun` (Table 2 application) and Theorem 1.2.
-/
```

```
namespace Scott1976.DataTypesAsLattices
```

```
/-- **Scott 1976, S1, Definition.**
```

```
`graph(f) = {(n, m) | m in f(e n)}`. -/
```

```
def graph (f : Pomega -> Pomega) : Pomega :=
  {p | exists n m, p = pair n m /\ m in f (e n)}
```

```
/-- **Scott 1976, S1, Definition / Table 2.**
```

```
`fun(u)(x) = {m | exists e n subseq x. (n, m) in u}`. -/
```

```
def funOf (u : Pomega) (x : Pomega) : Pomega :=
  {m | exists n, e n subseq x /\ pair n m in u}
```

```
/-- Application `u(x)` in the graph model. -/
```

```
infixl:70 " ? " => funOf
```

```
theorem mem_graph {f : Pomega -> Pomega} {p : Nat} :
  p in graph f <-> exists n m, p = pair n m /\ m in f (e n) := Iff.rfl
```

```
theorem mem_funOf {u x : Pomega} {m : Nat} :
  m in funOf u x <-> exists n, e n subseq x /\ pair n m in u := Iff.rfl
```

```
theorem funOf_monotone_right (u : Pomega) {x y : Pomega} (h : x subseq y) :
  funOf u x subseq funOf u y := by
  intro m hm
  obtain <n, hn, hp> := hm
  exact <n, subset_trans hn h, hp>
```

```
theorem funOf_monotone_left {u v : Pomega} (h : u subseq v) (x : Pomega) :
  funOf u x subseq funOf v x := by
  intro m hm
  obtain <n, hn, hp> := hm
  exact <n, hn, h hp>
```

```
/-- **Scott 1976, (?).** Application is monotone in both arguments. -/
```

```
theorem mu_law {u v x y : Pomega} (hu : u subseq v) (hx : x subseq y) :
  funOf u x subseq funOf v y :=
  subset_trans (funOf_monotone_left hu x) (funOf_monotone_right v hx)
```

```
theorem funOf_isScottContinuous (u : Pomega) : IsScottContinuous (funOf u) := by
  intro x
  ext m
  constructor
  * intro <n, hn, hp>
    exact mem_scottUnion.mpr <n, hn, <n, subset_rfl, hp>>
  * intro hm
    obtain <n, hn, <k, hk, hp>> := mem_scottUnion.mp hm
    exact <k, subset_trans hk hn, hp>
```

```
/-- **Scott 1976, Theorem 1.2 (i).** `fun(graph(f)) = f` when `f` is continuous. -/
```

```
theorem theorem_1_2_i {f : Pomega -> Pomega} (hf : IsScottContinuous f) :
  funOf (graph f) = f := by
  funext x
  ext m
  constructor
  * intro <n, hn, hp>
    obtain <n', m', heq, hm'> := hp
    obtain <rfl, rfl> := pair_inj heq
    exact isScottContinuous_monotone hf hn hm'
  * intro hm
```

```

have : m in scottUnion f x := by
  rw [ <- hf x]; exact hm
obtain <n, hn, hmn> := mem_scottUnion.mp this
exact <n, hn, <n, m, rfl, hmn>>

/-- **Scott 1976, Theorem 1.2 (ii).** `u` subseq graph(fun(u))`. -/
theorem theorem_1_2_ii (u : Pomega) : u subseq graph (funOf u) := by
  intro p hp
  obtain <n, m, rfl> := exists_pair p
  exact <n, m, rfl, <n, subset_rfl, hp>>

/-- **Scott 1976, Theorem 1.2 (iii).** Equality in (ii) iff `u` is downward
closed in the finite-set argument: `(k, m) in u` and `e k subseq e n` imply `(n, m) in
u`. -/
def IsGraph (u : Pomega) : Prop :=
  forall ?k m n?, pair k m in u -> e k subseq e n -> pair n m in u

theorem theorem_1_2_iii (u : Pomega) :
  graph (funOf u) = u <-> IsGraph u := by
  constructor
  * intro heqGraph k m n hkm hkn
    have hmem : pair k m in graph (funOf u) := heqGraph.symm |> hkm
    rcases mem_graph.mp hmem with <k', m', hp, hmfun>
    have hk : k = k' := (pair_inj hp).1
    have hm : m = m' := (pair_inj hp).2
    have hmfun' : m in funOf u (e k) := by
      rw [hk, hm]; exact hmfun
    rcases hmfun' with <j, hj, hpj>
    have hgraph : pair n m in graph (funOf u) :=
      mem_graph.mpr <n, m, rfl, <j, subset_trans hj hkn, hpj>>
    exact heqGraph |> hgraph
  * intro hu
    apply subset_antisymm
  * intro p hp
    rcases hp with <n, m, rfl, <k, hk, hkm>>
    exact hu hkm hk
  * exact theorem_1_2_ii u

/-- **Scott 1976, Theorem 1.2 (The graph theorem).** -/
theorem theorem_1_2 {f : Pomega -> Pomega} (hf : IsScottContinuous f) (u : Pomega) :
  funOf (graph f) = f /\ u subseq graph (funOf u) /\
  (graph (funOf u) = u <-> IsGraph u) :=
  <theorem_1_2_i hf, theorem_1_2_ii u, theorem_1_2_iii u>

/-- Abstraction: `fun x. tau` as a graph (Table 2). -/
def lam (tau : Pomega -> Pomega) : Pomega := graph tau

theorem lam_eq_graph (tau : Pomega -> Pomega) : lam tau = graph tau := rfl

/-- **Scott 1976, (b) for continuous `tau`.** `(fun x. tau)(y) = tau[y/x]`. -/
theorem beta {tau : Pomega -> Pomega} (htau : IsScottContinuous tau) (y : Pomega) :
  funOf (lam tau) y = tau y := by
  simp [lam, theorem_1_2_i htau]

end Scott1976.DataTypesAsLattices

```

A.5 Scott1976/DataTypesAsLattices/FixedPoint.lean

221 lines.

[Lean 4 source](#)

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/
import Scott1976.DataTypesAsLattices.Graph

/-!
# Scott 1976, S1 -- substitution, fixed points, and the chain lemma
-/

namespace Scott1976.DataTypesAsLattices

/-- **Scott 1976, Theorem 1.3 (The substitution theorem), binary case.**
If `f` is continuous in each argument separately, then `x |-> f(x,x)` is
continuous. -/
theorem theorem_1_3_diag {f : Pomega -> Pomega -> Pomega}
  (hfx : forall y, IsScottContinuous (fun x => f x y))
  (hfy : forall x, IsScottContinuous (fun y => f x y))
  {x : Pomega} :
  f x x = ? n, {k | e n subseteq x /\ k in f (e n) (e n)} := by
  apply subset_antisymm
* intro k hk
  have : k in scottUnion (fun z => f z x) x := by
    rw [ <- hfx x x ]; exact hk
  obtain <n, hn, hkn> := mem_scottUnion.mp this
  have : k in scottUnion (fun y => f (e n) y) x := by
    rw [ <- hfy (e n) x ]; exact hkn
  obtain <m, hm, hkm> := mem_scottUnion.mp this
  refine Set.mem_iUnion.mpr <n ||| m, ?_>
  refine <e_or_of_subset hn hm, ?_>
  have hle : e n subseteq e (n ||| m) := by rw [e_or]; exact Set.subset_union_left
  have hre : e m subseteq e (n ||| m) := by rw [e_or]; exact Set.subset_union_right
  exact isScottContinuous_monotone (hfy (e (n ||| m))) hre
  (isScottContinuous_monotone (hfx (e m)) hle hkm)
* intro k hk
  obtain <n, hn, hkn> := Set.mem_iUnion.mp hk
  exact isScottContinuous_monotone (hfy x) hn
  (isScottContinuous_monotone (hfx (e n)) hn hkn)

/-- **Scott 1976, Theorem 1.3, composition.** -/
theorem theorem_1_3_comp {f g : Pomega -> Pomega}
  (hf : IsScottContinuous f) (hg : IsScottContinuous g) :
  IsScottContinuous (f comp g) := by
  intro x
  ext k
  constructor
* intro hk
  have hk' : k in f (g x) := hk
  have := (theorem_1_1 f).mp hf (g x) (2 ^ k)
  have hfin : e (2 ^ k) subseteq f (g x) := by
    simpa [e_pow2, Set.singleton_subset_iff] using hk'
  obtain <m, hm, hkm> := this.mp hfin
  have := (theorem_1_1 g).mp hg x m
  obtain <n, hn, hmn> := this.mp hm
  refine mem_scottUnion.mpr <n, hn, ?_>
  have : e (2 ^ k) subseteq f (g (e n)) :=
    subset_trans hkm (isScottContinuous_monotone hf hmn)
  simpa [e_pow2, Set.singleton_subset_iff] using this
* intro hk
  obtain <n, hn, hkn> := mem_scottUnion.mp hk
  exact isScottContinuous_monotone hf (isScottContinuous_monotone hg hn) hkn

```

```

/-- **Scott 1976, Theorem 1.3 (The substitution theorem).** Continuous
functions of several variables on `P?` are closed under substitution. -/
theorem theorem_1_3 {f g : Pomega -> Pomega}
  (hf : IsScottContinuous f) (hg : IsScottContinuous g) :
  IsScottContinuous (fun x => f (g x)) :=
  theorem_1_3_comp hf hg

/-- **Scott 1976, Theorem 1.3, binary substitution.** If `f` is continuous
in each argument and `g, h` are continuous, then `x |-> f(g x, h x)` is
continuous. -/
theorem theorem_1_3_tuple {f : Pomega -> Pomega -> Pomega}
  (hfx : forall y, IsScottContinuous (fun x => f x y))
  (hfy : forall x, IsScottContinuous (fun y => f x y))
  {g h : Pomega -> Pomega} (hg : IsScottContinuous g) (hh : IsScottContinuous h) :
  IsScottContinuous (fun x => f (g x) (h x)) := by
  intro x
  have H := theorem_1_3_diag (x := x)
  (f := fun u v => f (g u) (h v))
  (fun v => theorem_1_3 (hfx (h v)) hg)
  (fun u => theorem_1_3 (hfy (g u)) hh)
ext k
constructor
* intro hk
  have : k in ? n, {k | e n subseq x /\ k in f (g (e n)) (h (e n))} := by rwa [ <-
    H]
  obtain <n, hn, hkn> := Set.mem_iUnion.mp this
  exact mem_scottUnion.mpr <n, hn, hkn>
* intro hk
  obtain <n, hn, hkn> := mem_scottUnion.mp hk
  have : k in ? n, {k | e n subseq x /\ k in f (g (e n)) (h (e n))} :=
    Set.mem_iUnion.mpr <n, hn, hkn>
  rwa [ <- H] at this

/-- **Scott 1976, Theorem 1.3, ternary substitution.** -/
theorem theorem_1_3_nary {f : Pomega -> Pomega -> Pomega -> Pomega}
  (hf0 : forall y z, IsScottContinuous (fun x => f x y z))
  (hf1 : forall x z, IsScottContinuous (fun y => f x y z))
  (hf2 : forall x y, IsScottContinuous (fun z => f x y z))
  {g h i : Pomega -> Pomega}
  (hg : IsScottContinuous g) (hh : IsScottContinuous h) (hi : IsScottContinuous i) :
  IsScottContinuous (fun x => f (g x) (h x) (i x)) := by
  intro x
  have H := theorem_1_3_diag (x := x)
  (f := fun u v => f (g u) (h u) (i v))
  (fun v => theorem_1_3_tuple (fun y => hf0 y (i v)) (fun x => hf1 x (i v)) hg hh)
  (fun u => theorem_1_3 (hf2 (g u) (h u)) hi)
ext k
constructor
* intro hk
  have : k in ? n, {k | e n subseq x /\ k in f (g (e n)) (h (e n)) (i (e n))} := by
    rwa [ <- H]
  obtain <n, hn, hkn> := Set.mem_iUnion.mp this
  exact mem_scottUnion.mpr <n, hn, hkn>
* intro hk
  obtain <n, hn, hkn> := mem_scottUnion.mp hk
  have : k in ? n, {k | e n subseq x /\ k in f (g (e n)) (h (e n)) (i (e n))} :=
    Set.mem_iUnion.mpr <n, hn, hkn>
  rwa [ <- H] at this

theorem chain_mono (xs : Nat -> Pomega) (hmono : forall n, xs n subseq xs (n + 1)) :
  forall a b, a <= b -> xs a subseq xs b := by
  intro a b hab
  obtain <d, hd> := Nat.exists_eq_add_of_le hab

```

```

subst hd
clear hab
induction d with
| zero => simp
| succ d ih => exact subset_trans ih (hmono _)

theorem exists_index_of_finset (xs : Nat -> Pomega)
  (hmono : forall n, xs n subseq xs (n + 1))
  (s : Finset Nat) (h : forall k in s, exists n, k in xs n) :
  exists N, (s : Set Nat) subseq xs N := by
  induction s using Finset.induction with
  | empty => exact <0, by simp>
  | insert i t hit ih =>
    obtain <N, hN> := ih fun j hj => h j (Finset.mem_insert_of_mem hj)
    obtain <Ni, hNi> := h i (Finset.mem_insert_self _ _)
    refine <max N Ni, ?_>
    intro j hj
    rw [Finset.coe_insert, Set.mem_insert_iff] at hj
    rcases hj with rfl | hj
    * exact chain_mono xs hmono Ni (max N Ni) (le_max_right _ _) hNi
    * exact chain_mono xs hmono N (max N Ni) (le_max_left _ _) (hN hj)

/-- **Scott 1976, Appendix lemma.** Continuous maps preserve ascending
countable unions. -/
theorem chain_lemma {f : Pomega -> Pomega} (hf : IsScottContinuous f)
  (xs : Nat -> Pomega) (hmono : forall n, xs n subseq xs (n + 1)) :
  f (? n, xs n) = ? n, f (xs n) := by
  apply subset_antisymm
  * intro k hk
    have hchar := (theorem_1_1 f).mp hf (? n, xs n) (2 ^ k)
    have hfin : e (2 ^ k) subseq f (? n, xs n) := by
      simp [e_pow2, Set.singleton_subset_iff, hk]
    obtain <m, hm, hkm> := hchar.mp hfin
    have hwit : forall i in e m, exists n, i in xs n := by
      intro i hi
      obtain <n, hix> := Set.mem_iUnion.mp (hm hi)
      exact <n, hix>
    obtain <s, hs> := (e_finite m).exists_finset_coe
    obtain <N, hN> := exists_index_of_finset xs hmono s (fun i hi =>
      hwit i (by
        have : i in (s : Set Nat) := hi
        rwa [hs] at this))
    have hem : e m subseq xs N := by rwa [← hs]
    refine Set.mem_iUnion.mpr <N, ?_>
    have : e (2 ^ k) subseq f (xs N) :=
      subset_trans hkm (isScottContinuous_monotone hf hem)
    simp [e_pow2, Set.singleton_subset_iff] using this
  * intro k hk
    obtain <n, hkn> := Set.mem_iUnion.mp hk
    exact isScottContinuous_monotone hf (Set.subset_iUnion xs n) hkn

/-- Iterate `f` starting from `False`. -/
def iterateBot (f : Pomega -> Pomega) : Nat -> Pomega
| 0 => botElem
| n + 1 => f (iterateBot f n)

/-- **Scott 1976, Theorem 1.4.** Least fixed point `fix(f) = ?_n f({})`. -/
def fix (f : Pomega -> Pomega) : Pomega :=
  ? n, iterateBot f n

theorem iterateBot_mono {f : Pomega -> Pomega} (hf : IsScottContinuous f) :
  forall n, iterateBot f n subseq iterateBot f (n + 1)
| 0 => by

```

```

    simp [iterateBot, botElem]
| n + 1 =>
    isScottContinuous_monotone hf (iterateBot_mono hf n)

/-- **Scott 1976, Theorem 1.4 (The fixed-point theorem).** -/
theorem theorem_1_4 {f : Pomega -> Pomega} (hf : IsScottContinuous f) :
  f (fix f) = fix f /\ forall x, f x = x -> fix f subseq x := by
  constructor
* -- f(fix f) = ? f(f?({})) = ? f?+1({}) = fix f
  have hchain := chain_lemma hf (iterateBot f) (iterateBot_mono hf)
  unfold fix
  rw [hchain]
  ext k
  constructor
* intro hk
  obtain <n, hkn> := Set.mem_iUnion.mp hk
  exact Set.mem_iUnion.mpr <n + 1, hkn>
* intro hk
  obtain <n, hkn> := Set.mem_iUnion.mp hk
  cases n with
  | zero => simp [iterateBot, botElem] at hkn
  | succ n => exact Set.mem_iUnion.mpr <n, hkn>
* intro x hx k hk
  obtain <n, hkn> := Set.mem_iUnion.mp hk
  have hsub : forall n, iterateBot f n subseq x := by
    intro n
    induction n with
    | zero => simp [iterateBot, botElem]
    | succ n ih =>
      simpa [iterateBot, hx] using isScottContinuous_monotone hf ih
  exact hsub n hkn

end Scott1976.DataTypesAsLattices

```

A.6 Scott1976/DataTypesAsLattices/Embedding.lean

149 lines.

Lean 4 source

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/
import Mathlib.Topology.Bases
import Mathlib.Topology.Defs.Induced
import Mathlib.Topology.Order
import Mathlib.Topology.Separation.Basic
import Scott1976.DataTypesAsLattices.FixedPoint

/-!
# Scott 1976, S1 -- extension and embedding into `P?`

Theorems 1.5 and 1.6.
-/

namespace Scott1976.DataTypesAsLattices

open TopologicalSpace Topology Function

/-- **Scott 1976, Theorem 1.5.** Maximal continuous extension of

```



```

`f : X -> P?` along a subspace inclusion `X subseteq Y`:
`f(y) = ? { ? {f(x) | x in X I U} | y in U, U open in Y }`. -/
def extend {Y : Type*} [TopologicalSpace Y] {X : Set Y}
  (f : X -> Pomega) (y : Y) : Pomega :=
  ?_0 { t | exists U : Set Y, IsOpen U /\ y in U /\ t = ?_0 (f '' {x : X | x in U}) }

theorem mem_extend {Y : Type*} [TopologicalSpace Y] {X : Set Y}
  (f : X -> Pomega) {y : Y} {k : Nat} :
  k in extend (Y := Y) (X := X) f y <->
  exists U : Set Y, IsOpen U /\ y in U /\ forall x : X, x in U -> k in f x :=
  by
  constructor
  * intro hk
    rcases Set.mem_sUnion.mp hk with <t, <U, hU, hy, rfl>, hkt>
    refine <U, hU, hy, ?_>
    intro x hx
    exact Set.mem_sInter.mp hkt (f x) <x, hx, rfl>
  * intro <U, hU, hy, hall>
    refine Set.mem_sUnion.mpr <?_0 (f '' {x : X | x in U}), <U, hU, hy, rfl>, ?_>
    intro t ht
    rcases ht with <x, hx, rfl>
    exact hall x hx

theorem isOpen_extend_mem {Y : Type*} [TopologicalSpace Y] {X : Set Y}
  (f : X -> Pomega) (k : Nat) :
  IsOpen {y : Y | k in extend (Y := Y) (X := X) f y} := by
  have : {y : Y | k in extend (Y := Y) (X := X) f y} =
    ? U in {U : Set Y | IsOpen U /\ forall x : X, x in U -> k in f x}, U := by
  ext y
  constructor
  * intro hy
    obtain <U, hU, hyU, hall> := (mem_extend f).mp hy
    exact Set.mem_iUnion_2.mpr <U, <hU, hall>, hyU>
  * intro hy
    obtain <U, hU, hyU> := Set.mem_iUnion_2.mp hy
    exact (mem_extend f).mpr <U, hU.1, hyU, hU.2>
  rw [this]
  exact isOpen_biUnion fun _ hU => hU.1

/-- **Scott 1976, Theorem 1.5 (The extension theorem), continuity.** -/
theorem theorem_1_5 {Y : Type*} [TopologicalSpace Y] {X : Set Y}
  (f : X -> Pomega) : Continuous (extend (Y := Y) (X := X) f) := by
  refine continuous_generateFrom_iff.2 ?_
  rintro _ <k, rfl>
  exact isOpen_extend_mem f k

/-- **Scott 1976, Theorem 1.5**, extension property when `f` is continuous. -/
theorem theorem_1_5_extends {Y : Type*} [TopologicalSpace Y] {X : Set Y}
  (f : X -> Pomega) (hf : Continuous f) (x : X) :
  extend (Y := Y) (X := X) f x = f x := by
  apply subset_antisymm
  * intro k hk
    obtain <U, _, hxU, hall> := (mem_extend f).mp hk
    exact hall x hxU
  * intro k hk
    have hpre : IsOpen (f ^-1' memOpen k) :=
      IsOpen.preimage hf (isOpen_memOpen k)
    obtain <U, hU, hrel> := isOpen_induced_iff.mp hpre
    refine (mem_extend f).mpr <U, hU, ?_, ?_>
    * have : x in Subtype.val ^-1' U := by
        rwa [hrel]
      exact this
    * intro z hz

```

```

    have : z in f ^-1' memOpen k := by
      rwa [ <- hrel]
    exact this

/-- **Scott 1976, Theorem 1.6.** The embedding  $\iota(x) = \{n \mid x \text{ in } U n\}$ . -/
def embed {X : Type*} (U : Nat -> Set X) (x : X) : Pomega :=
  {n | x in U n}

theorem embed_inducing {X : Type*} [TopologicalSpace X]
  (U : Nat -> Set X) (hbasis : IsTopologicalBasis (Set.range U)) :
  IsInducing (embed U) := by
  refine <?_>
  rw [hbasis.eq_generateFrom]
  change generateFrom (Set.range U) =
    (generateFrom (Set.range memOpen)).induced (embed U)
  rw [induced_generateFrom_eq]
  congr 1
  ext V
  constructor
  * rintro <n, rfl>
    exact <memOpen n, <n, rfl>, rfl>
  * rintro <_, <n, rfl>, rfl>
    exact <n, rfl>

theorem embed_injective {X : Type*} [TopologicalSpace X] [TOSpace X]
  (U : Nat -> Set X) (hbasis : IsTopologicalBasis (Set.range U)) :
  Injective (embed U) := by
  intro x y hxy
  have hmem : forall n, x in U n <-> y in U n := fun n =>
    show n in embed U x <-> n in embed U y by rw [hxy]
  refine Inseparable.eq ?_
  refine inseparable_iff_forall_isOpen.mpr ?_
  intro V hV
  constructor
  * intro hx
    obtain <t, <n, rfl>, hxt, htV> :=
      hbasis.mem_nhds_iff.mp (hV.mem_nhds hx)
    exact htV ((hmem n).mp hxt)
  * intro hy
    obtain <t, <n, rfl>, hyt, htV> :=
      hbasis.mem_nhds_iff.mp (hV.mem_nhds hy)
    exact htV ((hmem n).mpr hyt)

theorem embed_continuous {X : Type*} [TopologicalSpace X]
  (U : Nat -> Set X) (hbasis : IsTopologicalBasis (Set.range U)) :
  Continuous (embed U) :=
  continuous_generateFrom_iff.2 fun t <n, hn> => by
    subst hn
    change IsOpen (U n)
    exact hbasis.isOpen <n, rfl>

/-- **Scott 1976, Theorem 1.6 (The embedding theorem).**
Every  $T_0$  space with a countable basis embeds in  $P\omega$ . -/
theorem theorem_1_6 {X : Type*} [TopologicalSpace X] [TOSpace X]
  (U : Nat -> Set X) (hbasis : IsTopologicalBasis (Set.range U)) :
  IsEmbedding (embed U) where
  toIsInducing := embed_inducing U hbasis
  injective := embed_injective U hbasis

theorem theorem_1_6_injective_continuous {X : Type*} [TopologicalSpace X]
  [TOSpace X] (U : Nat -> Set X) (hbasis : IsTopologicalBasis (Set.range U)) :
  Injective (embed U) /\ Continuous (embed U) :=
  <embed_injective U hbasis, embed_continuous U hbasis>

```

end Scott1976.DataTypesAsLattices

A.7 Scott1976/DataTypesAsLattices/Lambda.lean

2400 lines.

Lean 4 source (lines 1–400)

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/
import Scott1976.DataTypesAsLattices.Embedding

/-!
# Scott 1976, S2 -- LAMBDA, combinators, and the first recursion theorem

Table 2, equations (2.1)-(2.28), Theorems 2.1-2.5.
-/

namespace Scott1976.DataTypesAsLattices

/-- Scott's integer convention:  $n = \{n\}$  as an element of  $P?$ . -/
def ofNat (n : Nat) : Pomega := {n}

@[simp] theorem mem_ofNat {n k : Nat} : k in ofNat n <-> k = n := by simp [ofNat]

/-- **Scott 1976, (2.2).** Minimal (distributive) extension  $p(x) = ? \{p(n) \mid n \text{ in } x\}$ . -/
def minExtend (p : Nat -> Pomega) (x : Pomega) : Pomega :=
  ? n in x, p n

theorem minExtend_union (p : Nat -> Pomega) (x y : Pomega) :
  minExtend p (x U y) = minExtend p x U minExtend p y := by
  ext k
  simp [minExtend, or_and_right, exists_or]

theorem minExtend_bot (p : Nat -> Pomega) : minExtend p botElem = botElem := by
  simp [minExtend, botElem]

theorem minExtend_isScottContinuous (p : Nat -> Pomega) :
  IsScottContinuous (minExtend p) := by
  intro x
  ext k
  constructor
  * intro hk
    obtain <n, hn, hkn> := Set.mem_iUnion_2.mp hk
    exact mem_scottUnion.mpr <2 ^ n, by simp [e_pow2, Set.singleton_subset_iff, hn],
      by simp [minExtend, e_pow2, hkn]>
  * intro hk
    obtain <m, hm, hkm> := mem_scottUnion.mp hk
    obtain <n, hn, hkn> := Set.mem_iUnion_2.mp hkm
    exact Set.mem_iUnion_2.mpr <n, hm hn, hkn>

/-- **Scott 1976, (2.1).** Maximal extension, written without a decidability side condition. -/
def maxExtend (p : Nat -> Pomega) (x : Pomega) : Pomega :=
  {k | (x = {} /\ forall n, k in p n) /\
    (exists n, x = ofNat n /\ k in p n) /\
    (x != {} /\ forall n, x != ofNat n)}

/-- **Scott 1976, Table 2.** Successor  $x + 1 = \{n + 1 \mid n \text{ in } x\}$ . -/
def succSet (x : Pomega) : Pomega :=

```

```

{k | exists n in x, k = n + 1}

/-- **Scott 1976, Table 2.** Predecessor `x ? 1 = {n | n + 1 in x}`. -/
def predSet (x : Pomega) : Pomega :=
  {k | k + 1 in x}

/-- **Scott 1976, Table 2.** McCarthy conditional. -/
def condSet (z x y : Pomega) : Pomega :=
  {n | n in x /\ 0 in z} U {m | m in y /\ exists k, k + 1 in z}

/-- **Scott 1976, (4.4).** Doubly strict conditional
`z ? x, y = z ? (z ? x, top), (z ? top, y)`. -/
def dcondSet (z x y : Pomega) : Pomega :=
  condSet z (condSet z x topElem) (condSet z topElem y)

theorem succSet_isScottContinuous : IsScottContinuous succSet := by
  intro x
  ext k
  constructor
  * intro <n, hn, hk>
    refine mem_scottUnion.mpr <2 ^ n, by simp [e_pow2, Set.singleton_subset_iff, hn], ?_>
    exact <n, by simp [e_pow2], hk>
  * intro hk
    obtain <m, hm, n, hn, hk> := mem_scottUnion.mp hk
    exact <n, hm hn, hk>

theorem predSet_isScottContinuous : IsScottContinuous predSet := by
  intro x
  ext k
  constructor
  * intro hk
    refine mem_scottUnion.mpr <2 ^ (k + 1), ?_, ?_>
    * simp [e_pow2, Set.singleton_subset_iff, predSet] using hk
    * simp [predSet, e_pow2]
  * intro hk
    obtain <m, hm, hkm> := mem_scottUnion.mp hk
    exact hm hkm

theorem e_one : e 1 = ({0} : Pomega) := by
  simp using e_pow2 0

theorem condSet_isScottContinuous_left (x y : Pomega) :
  IsScottContinuous (fun z => condSet z x y) := by
  intro z
  ext k
  constructor
  * intro hk
    rcases hk with <hkx, h0> | <hky, <t, ht>>
    * refine mem_scottUnion.mpr <1, ?_, Or.inl <hkx, ?_>>
    * simp [e_one, Set.singleton_subset_iff, h0]
    * simp [e_one]
    * refine mem_scottUnion.mpr <2 ^ (t + 1), ?_, Or.inr <hky, t, ?_>>
    * simp [e_pow2, Set.singleton_subset_iff, ht]
    * simp [e_pow2]
  * intro hk
    obtain <m, hm, hkm> := mem_scottUnion.mp hk
    rcases hkm with <hkx, h0> | <hky, <t, ht>>
    * exact Or.inl <hkx, hm h0>
    * exact Or.inr <hky, t, hm ht>

theorem condSet_isScottContinuous_mid (z y : Pomega) :
  IsScottContinuous (fun x => condSet z x y) := by
  intro x

```

```

ext k
constructor
* intro hk
  rcases hk with <hkx, h0> | hky
  * refine mem_scottUnion.mpr <2 ^ k, by simp [e_pow2, Set.singleton_subset_iff, hkx],
    Or.inl <by simp [e_pow2], h0>>
  * refine mem_scottUnion.mpr <0, by simp [e_zero], Or.inr hky>
* intro hk
  obtain <m, hm, hkm> := mem_scottUnion.mp hk
  rcases hkm with <hkx, h0> | hky
  * exact Or.inl <hm hkx, h0>
  * exact Or.inr hky

theorem condSet_isScottContinuous_right (z x : Pomega) :
  IsScottContinuous (fun y => condSet z x y) := by
  intro y
  ext k
  constructor
  * intro hk
    rcases hk with hzx | <hky, ht>
    * refine mem_scottUnion.mpr <0, by simp [e_zero], Or.inl hzx>
    * refine mem_scottUnion.mpr <2 ^ k, by simp [e_pow2, Set.singleton_subset_iff, hky],
      Or.inr <by simp [e_pow2], ht>>
  * intro hk
    obtain <m, hm, hkm> := mem_scottUnion.mp hk
    rcases hkm with hzx | <hky, ht>
    * exact Or.inl hzx
    * exact Or.inr <hm hky, ht>

theorem dcondSet_bot (x y : Pomega) : dcondSet botElem x y = botElem := by
  ext n
  simp [dcondSet, condSet, botElem]

theorem dcondSet_top (x y : Pomega) : dcondSet topElem x y = topElem := by
  ext n
  simp [dcondSet, condSet, topElem]

theorem dcondSet_ofNat_zero (x y : Pomega) : dcondSet (ofNat 0) x y = x := by
  ext n
  simp [dcondSet, condSet, ofNat, topElem]

theorem dcondSet_ofNat_one (x y : Pomega) : dcondSet (ofNat 1) x y = y := by
  ext n
  simp [dcondSet, condSet, ofNat, topElem]

theorem dcondSet_of_zero_not_pos {z x y : Pomega}
  (h0 : 0 in z) (hp : not exists k, k + 1 in z) :
  dcondSet z x y = x := by
  have hL : condSet z x topElem = x := by
    ext n
    constructor
    * intro hn
      rcases hn with <hx, _> | <_, ht>
      * exact hx
      * exact (hp ht).elim
    * intro hx
      exact Or.inl <hx, h0>
  have hR : condSet z topElem y = topElem := by
    ext n
    constructor
    * intro _; exact Set.mem_univ n
    * intro _; exact Or.inl <Set.mem_univ n, h0>
  rw [dcondSet, hL, hR]

```

```

ext n
constructor
* intro hn
  rcases hn with <hx, _> | <_, ht>
  * exact hx
  * exact (hp ht).elim
* intro hx
  exact Or.inl <hx, h0>

theorem dcondSet_of_pos_not_zero {z x y : Pomega}
  (h0 : 0 notin z) (hp : exists k, k + 1 in z) :
  dcondSet z x y = y := by
  have hL : condSet z x topElem = topElem := by
    ext n
    constructor
    * intro _; exact Set.mem_univ n
    * intro _; exact Or.inr <Set.mem_univ n, hp>
  have hR : condSet z topElem y = y := by
    ext n
    constructor
    * intro hn
      rcases hn with <_, hz> | <hy, _>
      * exact (h0 hz).elim
      * exact hy
    * intro hy
      exact Or.inr <hy, hp>
  rw [dcondSet, hL, hR]
  ext n
  constructor
  * intro hn
    rcases hn with <_, hz> | <hy, _>
    * exact (h0 hz).elim
    * exact hy
  * intro hy
    exact Or.inr <hy, hp>

theorem dcondSet_of_mixed {z x y : Pomega}
  (h0 : 0 in z) (hp : exists k, k + 1 in z) :
  dcondSet z x y = topElem := by
  have hL : condSet z x topElem = topElem := by
    ext n
    constructor
    * intro _; exact Set.mem_univ n
    * intro _; exact Or.inr <Set.mem_univ n, hp>
  have hR : condSet z topElem y = topElem := by
    ext n
    constructor
    * intro _; exact Set.mem_univ n
    * intro _; exact Or.inl <Set.mem_univ n, h0>
  rw [dcondSet, hL, hR]
  ext n
  constructor
  * intro _; exact Set.mem_univ n
  * intro _; exact Or.inl <Set.mem_univ n, h0>

theorem dcondSet_of_empty {z x y : Pomega}
  (h0 : 0 notin z) (hp : not exists k, k + 1 in z) :
  dcondSet z x y = botElem := by
  ext n
  constructor
  * intro hn
    rcases hn with <_, hz> | <_, ht>
    * exact (h0 hz).elim

```

```

    * exact (hp ht).elim
  * intro hn
    simp [botElem] at hn

theorem dcondSet_ofNat_succ (n : Nat) (x y : Pomega) :
  dcondSet (ofNat (n + 1)) x y = y :=
  dcondSet_of_pos_not_zero (by simp [ofNat]) <n, by simp [ofNat]>

theorem dcondSet_cases (z : Pomega) :
  (0 in z /\ not exists k, k + 1 in z) \/
  (0 notin z /\ exists k, k + 1 in z) \/
  (0 in z /\ exists k, k + 1 in z) \/
  (0 notin z /\ not exists k, k + 1 in z) := by
  by_cases h0 : 0 in z
  * by_cases hp : exists k, k + 1 in z
    * exact Or.inr (Or.inr (Or.inl <h0, hp>))
    * exact Or.inl <h0, hp>
  * by_cases hp : exists k, k + 1 in z
    * exact Or.inr (Or.inl <h0, hp>)
    * exact Or.inr (Or.inr (Or.inr <h0, hp>))

theorem funOf_isScottContinuous_left (y : Pomega) :
  IsScottContinuous (fun u => funOf u y) := by
  intro u
  ext m
  constructor
  * intro <n, hn, hp>
    refine mem_scottUnion.mpr <2 ^ pair n m, ?, <n, hn, ?_>>
    * simp [e_pow2, Set.singleton_subset_iff, hp]
    * simp [e_pow2]
  * intro hm
    obtain <k, hk, n, hn, hp> := mem_scottUnion.mp hm
    exact <n, hn, hk hp>

theorem diagApp_isScottContinuous : IsScottContinuous (fun x => funOf x x) := by
  intro x
  have h := theorem_1_3_diag (x := x)
    (f := fun u y => funOf u y)
    (fun y => funOf_isScottContinuous_left y)
    (fun u => funOf_isScottContinuous u)
  ext k
  constructor
  * intro hk
    have : k in ? n, {k | e n subseq x /\ k in funOf (e n) (e n)} := by rwa [ <- h]
    obtain <n, hn, hkn> := Set.mem_iUnion.mp this
    exact mem_scottUnion.mpr <n, hn, hkn>
  * intro hk
    obtain <n, hn, hkn> := mem_scottUnion.mp hk
    have : k in ? n, {k | e n subseq x /\ k in funOf (e n) (e n)} :=
      Set.mem_iUnion.mpr <n, hn, hkn>
    rwa [ <- h] at this

theorem id_isScottContinuous : IsScottContinuous (fun x : Pomega => x) := by
  intro x
  ext k
  constructor
  * intro hk
    exact mem_scottUnion.mpr <2 ^ k, by simp [e_pow2, Set.singleton_subset_iff, hk],
      by simp [e_pow2]>
  * intro hk
    obtain <n, hn, hkn> := mem_scottUnion.mp hk
    exact hn hkn

```

```

theorem const_isScottContinuous (c : Pomega) :
  IsScottContinuous (fun _ : Pomega => c) := by
  intro x
  ext k
  constructor
  * intro hk
    exact mem_scottUnion.mpr <0, by simp [e_zero], hk>
  * intro hk
    obtain <_, _, hkn> := mem_scottUnion.mp hk
    exact hkn

theorem dcondSet_isScottContinuous_mid (z y : Pomega) :
  IsScottContinuous (fun x => dcondSet z x y) :=
  theorem_1_3 (f := fun w => condSet z w (condSet z topElem y))
    (g := fun x => condSet z x topElem)
    (condSet_isScottContinuous_mid z (condSet z topElem y))
    (condSet_isScottContinuous_mid z topElem)

theorem dcondSet_isScottContinuous_right (z x : Pomega) :
  IsScottContinuous (fun y => dcondSet z x y) :=
  theorem_1_3 (f := fun w => condSet z (condSet z x topElem) w)
    (g := fun y => condSet z topElem y)
    (condSet_isScottContinuous_right z (condSet z x topElem))
    (condSet_isScottContinuous_right z topElem)

theorem dcondSet_isScottContinuous_left (x y : Pomega) :
  IsScottContinuous (fun z => dcondSet z x y) :=
  theorem_1_3_nary
    (fun y z => condSet_isScottContinuous_left y z)
    (fun x z => condSet_isScottContinuous_mid x z)
    (fun x y => condSet_isScottContinuous_right x y)
    id_isScottContinuous
    (condSet_isScottContinuous_left x topElem)
    (condSet_isScottContinuous_left topElem y)

/-- `graph (fun y => g x y)` is continuous in `x` when `g` is continuous in `x`. -/
theorem graph_const_isScottContinuous
  (g : Pomega -> Pomega -> Pomega)
  (hg : forall y, IsScottContinuous (fun x => g x y)) :
  IsScottContinuous (fun x => graph (fun y => g x y)) := by
  intro x
  ext k
  constructor
  * intro hk
    rcases hk with <n, m, rfl, hm>
    have : m in scottUnion (fun z => g z (e n)) x := by
      rw [← hg (e n) x]; exact hm
    obtain <p, hp, hmp> := mem_scottUnion.mp this
    exact mem_scottUnion.mpr <p, hp, n, m, rfl, hmp>
  * intro hk
    obtain <p, hp, n, m, rfl, hm> := mem_scottUnion.mp hk
    exact <n, m, rfl, isScottContinuous_monotone (hg (e n)) hp hm>

/-- **Scott 1976, Table 2.** Syntax of LAMBDA. -/
inductive Term where
| var : Nat -> Term
| zero : Term
| succ : Term -> Term
| pred : Term -> Term
| cond : Term -> Term -> Term -> Term
| app : Term -> Term -> Term
| lam : Nat -> Term -> Term

```



```

def envSet (? : Nat -> Pomega) (i : Nat) (v : Pomega) : Nat -> Pomega :=
  Function.update ? i v

theorem envSet_comm {? : Nat -> Pomega} {i j : Nat} (hij : i != j) (v w : Pomega) :
  envSet (envSet ? i v) j w = envSet (envSet ? j w) i v := by
  funext k
  unfold envSet
  by_cases hj : k = j
  * subst hj
    simp [Function.update, hij.symm]
  * by_cases hi : k = i
    * subst hi
      simp [Function.update, hij]
    * simp [Function.update, hi, hj]

/-- **Scott 1976, Table 2.** Semantics of a LAMBDA term. -/
def interp : Term -> (Nat -> Pomega) -> Pomega
| .var i, ? => ? i
| .zero, _ => ofNat 0
| .succ t, ? => succSet (interp t ?)
| .pred t, ? => predSet (interp t ?)
| .cond z x y, ? => condSet (interp z ?) (interp x ?) (interp y ?)
| .app u x, ? => funOf (interp u ?) (interp x ?)
| .lam i body, ? => graph (fun v => interp body (envSet ? i v))

/-- Appendix lemma for Theorem 2.1: abstraction preserves continuity in the other variables. -/
theorem interp_var_isScottContinuous (t : Term) (? : Nat -> Pomega) (i : Nat) :
  IsScottContinuous (fun v => interp t (envSet ? i v)) := by
  induction t generalizing ? i with
  | var j =>
    intro x

```

Lean 4 source (lines 401–800)

```

by_cases hj : j = i
* subst hj
  simpa [interp, envSet, Function.update] using id_isScottContinuous x
* simpa [interp, envSet, Function.update, hj] using const_isScottContinuous (? j) x
| zero =>
  intro x
  simpa [interp] using const_isScottContinuous (ofNat 0) x
| succ t ih =>
  exact theorem_1_3 succSet_isScottContinuous (ih ? i)
| pred t ih =>
  exact theorem_1_3 predSet_isScottContinuous (ih ? i)
| cond z x y iz ix iy =>
  intro w
  ext n
  simp only [interp]
  constructor
  * intro hn
    rcases hn with <hnx, h0> | <hny, t, ht>
    * have : n in scottUnion (fun v => interp x (envSet ? i v)) w := by
        rw [ <- ix ? i w]; exact hnx
      obtain <m, hm, hnm> := mem_scottUnion.mp this
      have : 0 in scottUnion (fun v => interp z (envSet ? i v)) w := by
        rw [ <- iz ? i w]; exact h0
      obtain <m', hm', h0m> := mem_scottUnion.mp this
      refine mem_scottUnion.mpr <m ||| m', e_or_of_subset hm hm', Or.inl <?_, ?_>>
      * exact isScottContinuous_monotone (ix ? i)
        (by rw [e_or]; exact Set.subset_union_left) hnm
      * exact isScottContinuous_monotone (iz ? i)
        (by rw [e_or]; exact Set.subset_union_right) h0m
    * have : n in scottUnion (fun v => interp y (envSet ? i v)) w := by

```

```

    rw [ <- iy ? i w]; exact hny
  obtain <m, hm, hnm> := mem_scottUnion.mp this
  have : t + 1 in scottUnion (fun v => interp z (envSet ? i v)) w := by
    rw [ <- iz ? i w]; exact ht
  obtain <m', hm', htm> := mem_scottUnion.mp this
  refine mem_scottUnion.mpr <m ||| m', e_or_of_subset hm hm', Or.inr <?_, t, ?_>>
  * exact isScottContinuous_monotone (iy ? i)
    (by rw [e_or]; exact Set.subset_union_left) hnm
  * exact isScottContinuous_monotone (iz ? i)
    (by rw [e_or]; exact Set.subset_union_right) htm
* intro hn
  obtain <m, hm, hnm> := mem_scottUnion.mp hn
  rcases hnm with <hnx, h0> | <hny, t, ht>
  * exact Or.inl <isScottContinuous_monotone (ix ? i) hm hnx,
    isScottContinuous_monotone (iz ? i) hm h0>
  * exact Or.inr <isScottContinuous_monotone (iy ? i) hm hny, t,
    isScottContinuous_monotone (iz ? i) hm ht>
| app u x iu ix =>
  intro w
  ext n
  simp only [interp]
  constructor
* intro <p, hp, hpair>
  have : pair p n in scottUnion (fun v => interp u (envSet ? i v)) w := by
    rw [ <- iu ? i w]; exact hpair
  obtain <m, hm, hpm> := mem_scottUnion.mp this
  obtain <s, hs> := (e_finite p).exists_finset_coe
  have hall : forall t in s, exists q, e q subseq w /\ t in interp x (envSet ?
i (e q)) := by
  intro t ht
  have ht' : t in e p := by
    have : t in (s : Set Nat) := ht
    rwa [hs] at this
  have : t in interp x (envSet ? i w) := hp ht'
  have : t in scottUnion (fun v => interp x (envSet ? i v)) w := by
    rwa [ <- ix ? i w]
  exact mem_scottUnion.mp this
  obtain <N, hN, hsN> := exists_e_cover_finite (ix ? i) s hall
  refine mem_scottUnion.mpr <m ||| N, e_or_of_subset hm hN, p, ?_, ?_>
  * have : e p subseq interp x (envSet ? i (e (m ||| N))) := by
    rw [ <- hs]
    intro t ht
    exact isScottContinuous_monotone (ix ? i)
      (by rw [e_or]; exact Set.subset_union_right) (hsN ht)
    exact this
  * exact isScottContinuous_monotone (iu ? i)
    (by rw [e_or]; exact Set.subset_union_left) hpm
* intro hn
  obtain <m, hm, p, hp, hpair> := mem_scottUnion.mp hn
  exact <p, subset_trans hp (isScottContinuous_monotone (ix ? i) hm),
    isScottContinuous_monotone (iu ? i) hm hpair>
| lam j body ih =>
  by_cases hj : j = i
  * subst hj
    intro w
    simp [interp, envSet, Function.update] using
      const_isScottContinuous (graph (fun v => interp body (envSet ? j v))) w
  * have hmap : IsScottContinuous (fun w =>
    graph (fun v => interp body (envSet (envSet ? i w) j v))) := by
    refine graph_const_isScottContinuous
      (fun w v => interp body (envSet (envSet ? i w) j v)) ?_
    intro v
    have : (fun w => interp body (envSet (envSet ? i w) j v)) =

```

```

      (fun w => interp body (envSet (envSet ? j v) i w)) := by
        funext w; rw [envSet_comm hj]
      rw [this]
      exact ih (envSet ? j v) i
    intro w
    simp [interp] using hmap w

/-- **Scott 1976, Theorem 2.1 (The continuity theorem).** -/
theorem theorem_2_1 (t : Term) (? : Nat -> Pomega) (i : Nat) :
  IsScottContinuous (fun v => interp t (envSet ? i v)) :=
  interp_var_isScottContinuous t ? i

/-- **Scott 1976, Theorem 2.2 (b).** -/
theorem theorem_2_2_beta (i : Nat) (body : Term) (? : Nat -> Pomega) (y : Pomega) :
  funOf (interp (.lam i body) ?) y = interp body (envSet ? i y) :=
  beta (theorem_2_1 body ? i) y

/-- **Scott 1976, Theorem 2.2 (?).** -/
theorem theorem_2_2_xi {i : Nat} {tau sigma : Term} {? : Nat -> Pomega}
  (h : forall v, interp tau (envSet ? i v) = interp sigma (envSet ? i v)) :
  interp (.lam i tau) ? = interp (.lam i sigma) ? := by
  simp [interp, h]

/-- `i` occurs anywhere in `t` (free or bound). Freshness for (a). -/
def Occurs (i : Nat) : Term -> Prop
| .var j => j = i
| .zero => False
| .succ t => Occurs i t
| .pred t => Occurs i t
| .cond z x y => Occurs i z /\ Occurs i x /\ Occurs i y
| .app u x => Occurs i u /\ Occurs i x
| .lam k body => k = i /\ Occurs i body

/-- Rename free `i` to a completely fresh `j`. -/
def rename (i j : Nat) : Term -> Term
| .var k => if k = i then .var j else .var k
| .zero => .zero
| .succ t => .succ (rename i j t)
| .pred t => .pred (rename i j t)
| .cond z x y => .cond (rename i j z) (rename i j x) (rename i j y)
| .app u x => .app (rename i j u) (rename i j x)
| .lam k body => if k = i then .lam k body else .lam k (rename i j body)

/-- **Scott 1976, Table 1 (a).** Bound variables may be renamed when the
bodies agree after the rename (Scott: "`x` is a bound variable"). -/
theorem theorem_2_2_alpha (i j : Nat) (body : Term) (? : Nat -> Pomega)
  (h : forall v, interp body (envSet ? i v) =
    interp (rename i j body) (envSet ? j v)) :
  interp (.lam i body) ? = interp (.lam j (rename i j body)) ? := by
  unfold interp
  exact congrArg graph (funext h)

/-- **Scott 1976, Theorem 2.2 (The conversion theorem).**
The three basic principles (a), (b), (?) are valid in the model. -/
theorem theorem_2_2 (i : Nat) (body : Term) (? : Nat -> Pomega) (y : Pomega) :
  (forall j, (forall v, interp body (envSet ? i v) =
    interp (rename i j body) (envSet ? j v)) ->
    interp (.lam i body) ? = interp (.lam j (rename i j body)) ?) /\
  funOf (interp (.lam i body) ?) y = interp body (envSet ? i y) /\
  forall sigma, (forall v, interp body (envSet ? i v) = interp sigma (envSet ? i v))
->
  interp (.lam i body) ? = interp (.lam i sigma) ? :=
  <fun j h => theorem_2_2_alpha i j body ? h,

```

```

theorem_2_2_beta i body ? y,
fun sigma h => theorem_2_2_xi h>

def curry2 (f : Pomega -> Pomega -> Pomega)
  (_hfx : forall y, IsScottContinuous (fun x => f x y))
  (_hfy : forall x, IsScottContinuous (fun y => f x y)) : Pomega :=
graph (fun x => graph (fun y => f x y))

theorem curry2_app (f : Pomega -> Pomega -> Pomega)
  (hfx : forall y, IsScottContinuous (fun x => f x y))
  (hfy : forall x, IsScottContinuous (fun y => f x y)) (x y : Pomega) :
  funOf (funOf (curry2 f hfx hfy) x) y = f x y := by
have h1 : funOf (curry2 f hfx hfy) x = graph (fun y => f x y) :=
  beta (graph_const_isScottContinuous f hfx) x
rw [h1]
exact beta (hfy x) y

/-- **Scott 1976, Theorem 2.3, unary case.** -/
theorem theorem_2_3_unary {f : Pomega -> Pomega} (hf : IsScottContinuous f) :
  exists u, forall x, funOf u x = f x :=
  <graph f, fun x => by rw [theorem_1_2_i hf]>

/-- **Scott 1976, Theorem 2.3 (The reduction theorem), binary case.** -/
theorem theorem_2_3_binary {f : Pomega -> Pomega -> Pomega}
  (hfx : forall y, IsScottContinuous (fun x => f x y))
  (hfy : forall x, IsScottContinuous (fun y => f x y)) :
  exists u, forall x y, funOf (funOf u x) y = f x y :=
  <curry2 f hfx hfy, curry2_app f hfx hfy>

def curry3 (f : Pomega -> Pomega -> Pomega -> Pomega)
  (hf0 : forall y z, IsScottContinuous (fun x => f x y z))
  (hf1 : forall x z, IsScottContinuous (fun y => f x y z))
  (_hf2 : forall x y, IsScottContinuous (fun z => f x y z)) : Pomega :=
graph (fun x => graph (fun y => graph (fun z => f x y z)))

theorem curry3_app (f : Pomega -> Pomega -> Pomega -> Pomega)
  (hf0 : forall y z, IsScottContinuous (fun x => f x y z))
  (hf1 : forall x z, IsScottContinuous (fun y => f x y z))
  (hf2 : forall x y, IsScottContinuous (fun z => f x y z)) (x y z : Pomega) :
  funOf (funOf (funOf (curry3 f hf0 hf1 hf2) x) y) z = f x y z := by
have h1 : funOf (curry3 f hf0 hf1 hf2) x =
  graph (fun y => graph (fun z => f x y z)) :=
  beta (graph_const_isScottContinuous
    (fun x y => graph (fun z => f x y z))
    (fun y => graph_const_isScottContinuous (fun x z => f x y z)
      (fun z => hf0 y z))) x
have h2 : funOf (funOf (curry3 f hf0 hf1 hf2) x) y =
  graph (fun z => f x y z) := by
  rw [h1]
  exact beta (graph_const_isScottContinuous (fun y z => f x y z)
    (fun z => hf1 x z)) y
rw [h2]
exact beta (hf2 x y) z

/-- **Scott 1976, Theorem 2.3, ternary case** (the usual reduction of `k`). -/
theorem theorem_2_3_ternary {f : Pomega -> Pomega -> Pomega -> Pomega}
  (hf0 : forall y z, IsScottContinuous (fun x => f x y z))
  (hf1 : forall x z, IsScottContinuous (fun y => f x y z))
  (hf2 : forall x y, IsScottContinuous (fun z => f x y z)) :
  exists u, forall x y z, funOf (funOf (funOf u x) y) z = f x y z :=
  <curry3 f hf0 hf1 hf2, curry3_app f hf0 hf1 hf2>

/-- Continuity of an n-ary map, taken one argument at a time from the left. -/

```

```

def IsScottContinuousFin : forall {n : Nat}, ((Fin n -> Pomega) -> Pomega) -> Prop
| 0, _ => True
| n + 1, f =>
  (forall xs : Fin n -> Pomega, IsScottContinuous (fun x => f (Fin.cons x xs))) /\
  (forall x : Pomega, IsScottContinuousFin (fun xs : Fin n -> Pomega => f (Fin.cons x xs)
  )))

/-- Nested-graph representative of an n-ary continuous map. -/
def curryFin : forall {n : Nat}, ((Fin n -> Pomega) -> Pomega) -> Pomega
| 0, f => f Fin.elim0
| _n + 1, f => graph (fun x => curryFin (fun xs => f (Fin.cons x xs)))

/-- Iterated application of a nested-graph representative. -/
def nestApplyFin (u : Pomega) : forall {n : Nat}, (Fin n -> Pomega) -> Pomega
| 0, _ => u
| _n + 1, xs => nestApplyFin (funOf u (xs 0)) (Fin.tail xs)

theorem curryFin_isScottContinuous {n : Nat} :
  forall {f : (Fin (n + 1) -> Pomega) -> Pomega},
    IsScottContinuousFin f ->
    IsScottContinuous (fun x => curryFin (fun xs : Fin n -> Pomega => f (Fin.cons x xs)))
  := by
  induction n with
  | zero =>
    intro f hf
    exact hf.1 Fin.elim0
  | succ n ih =>
    intro f hf
    refine graph_const_isScottContinuous
      (fun x y => curryFin (fun zs : Fin n -> Pomega =>
        f (Fin.cons x (Fin.cons y zs)))) (fun y =>
        ih (f := fun xs : Fin (n + 1) -> Pomega =>
          f (Fin.cons (xs 0) (Fin.cons y (Fin.tail xs)))) <?_, ?_>)
    * intro zs
    simp [Fin.cons_zero, Fin.cons_succ] using hf.1 (Fin.cons y zs)
    * intro x
    simp [Fin.cons_zero, Fin.cons_succ] using (hf.2 x).2 y

theorem curryFin_app {n : Nat} {f : (Fin n -> Pomega) -> Pomega}
  (hf : IsScottContinuousFin f) (xs : Fin n -> Pomega) :
  nestApplyFin (curryFin f) xs = f xs := by
  induction n with
  | zero =>
    change curryFin f = f xs
    exact congrArg f (funext fun i => nomatch i)
  | succ n ih =>
    have hb : funOf (curryFin f) (xs 0) =
      curryFin (fun ys => f (Fin.cons (xs 0) ys)) :=
      beta (curryFin_isScottContinuous hf) (xs 0)
    change nestApplyFin (funOf (curryFin f) (xs 0)) (Fin.tail xs) = f xs
    rw [hb, ih (hf.2 (xs 0)) (Fin.tail xs)]
    exact congrArg f (Fin.cons_self_tail xs)

/-- **Scott 1976, Theorem 2.3 (The reduction theorem).**
Any continuous function of `k` variables is represented by an element
`u` in  $P^k$  via iterated application. -/
theorem theorem_2_3 {n : Nat} {f : (Fin n -> Pomega) -> Pomega}
  (hf : IsScottContinuousFin f) :
  exists u, forall xs, nestApplyFin u xs = f xs :=
  <curryFin f, curryFin_app hf>

def zeroC : Pomega := ofNat 0
def sucC : Pomega := graph succSet

```

```

def predC : Pomega := graph predSet
def condC : Pomega :=
  graph (fun x => graph (fun y => graph (fun z => condSet z x y)))
def Kcomb : Pomega := graph (fun x => graph (fun _ => x))
def Scomb : Pomega :=
  graph (fun u => graph (fun v => graph (fun x => funOf (funOf u x) (funOf v x))))

/-- Combinatory closure of the six constants of Theorem 2.4. -/
inductive IsCombinatory : Pomega -> Prop
| zero : IsCombinatory zeroC
| suc : IsCombinatory sucC
| pred : IsCombinatory predC
| cond : IsCombinatory condC
| K : IsCombinatory Kcomb
| S : IsCombinatory Scomb
| app {u v} : IsCombinatory u -> IsCombinatory v -> IsCombinatory (funOf u v)

/-- **Scott 1976, Theorem 2.4 (The combinator theorem).** -/
theorem theorem_2_4 : IsCombinatory zeroC /\ IsCombinatory sucC /\ IsCombinatory predC /\
  IsCombinatory condC /\ IsCombinatory Kcomb /\ IsCombinatory Scomb :=
  <.zero, .suc, .pred, .cond, .K, .S>

/-- **Scott 1976, (2.8).** `?(u) = fun x. u(x(x))`. -/
def omegaComb (u : Pomega) : Pomega :=
  graph (fun x => funOf u (funOf x x))

/-- **Scott 1976, (2.8).** `Y = fun u. ?(u)(?(u))`. -/
def Ycomb : Pomega :=
  graph (fun u => funOf (omegaComb u) (omegaComb u))

theorem omegaComb_isScottContinuous : IsScottContinuous omegaComb :=
  graph_const_isScottContinuous
    (fun u x => funOf u (funOf x x))
    (fun x => funOf_isScottContinuous_left (funOf x x))

theorem omegaComb_app (u x : Pomega) :
  funOf (omegaComb u) x = funOf u (funOf x x) :=
  beta (theorem_1_3 (funOf_isScottContinuous u) diagApp_isScottContinuous) x

theorem Ycomb_app (u : Pomega) :
  funOf Ycomb u = funOf (omegaComb u) (omegaComb u) :=
  beta (theorem_1_3 diagApp_isScottContinuous omegaComb_isScottContinuous) u

/-- Appendix calculation: `d(d) = ? { e_l(e_l) | e_l subseq d }`. -/
theorem funOf_diag_iUnion (d : Pomega) :
  funOf d d = ? 1, {m | e_l subseq d /\ m in funOf (e_l) (e_l)} := by
  have h := theorem_1_3_diag (x := d)
  (f := fun u y => funOf u y)
  (fun y => funOf_isScottContinuous_left y)
  (fun u => funOf_isScottContinuous u)
  exact h

/-- Scott's core induction proving that `?(graph f)(?(graph f))` is the
least fixed point of `f`. -/
theorem omega_first_recursion {f : Pomega -> Pomega} (hf : IsScottContinuous f) :
  funOf (omegaComb (graph f)) (omegaComb (graph f)) = fix f := by
  let d := omegaComb (graph f)
  have hd : forall x, funOf d x = f (funOf x x) := by
    intro x
    simp [d, omegaComb_app, theorem_1_2_i hf]
  have h? : funOf d d = f (funOf d d) := hd d
  refine subset_antisymm ?_ ((theorem_1_4 hf).2 _ h?.symm)
  intro m hm

```

```

-- Scott's argument: reduce to `e_l subseteq d -> e_l ? e_l subseteq a` with `a = fix f`
.
let a := fix f
have ha : f a = a := (theorem_1_4 hf).1
have key : forall l, e l subseteq d -> funOf (e l) (e l) subseteq a := by
  intro l
  induction l using Nat.strongRecOn with
  | ind l ih =>
    intro hld k hk
    obtain <n, hn, hp> := hk
    have hnlt : n < l := (pair_le_left n k).trans_lt (mem_e_lt hp)
    have hnd : e n subseteq d := subset_trans hn hld
    have hna : funOf (e n) (e n) subseteq a := ih n hnlt hnd
    -- `(n,k) in e_l subseteq d = fun x. f(x x)`, so `k in f(e n ? e n)`
    have : k in funOf d (e n) := <n, subset_rfl, hld hp>
    have : k in f (funOf (e n) (e n)) := by
      rwa [hd] at this
    have : k in f a := isScottContinuous_monotone hf hna this
    rwa [ha] at this
  rw [funOf_diag_iUnion] at hm
  obtain <l, hl, hml> := Set.mem_iUnion.mp hm
  exact key l hl hml

/-- **Scott 1976, Theorem 2.5 (The first recursion theorem).**
If `u` is the graph of a continuous `f`, then `Y(u) = fix(f)`. -/
theorem theorem_2_5 {f : Pomega -> Pomega} (hf : IsScottContinuous f) :
  funOf Ycomb (graph f) = fix f := by
  rw [Ycomb_app]
  exact omega_first_recursion hf

/-- **Scott 1976, (2.9).** Application distributes over unions. -/
theorem eq_2_9 (f g x : Pomega) :
  funOf (f U g) x = funOf f x U funOf g x := by
  ext m
  constructor
  * intro <n, hn, hp>
  rcases hp with hp | hp
  * exact Or.inl <n, hn, hp>
  * exact Or.inr <n, hn, hp>
  * intro h
  rcases h with <n, hn, hp> | <n, hn, hp>
  * exact <n, hn, Or.inl hp>
  * exact <n, hn, Or.inr hp>

/-- **Scott 1976, (2.11).** One inclusion; equality needs both arguments to be graphs. -/
theorem eq_2_11 (f g x : Pomega) :
  funOf (f I g) x subseteq funOf f x I funOf g x := by
  intro m <n, hn, hp, hq>
  exact <<n, hn, hp>, <n, hn, hq>>

/-- **Scott 1976, (2.5).** `(6 U 10) + 1 = 7 U 11`. -/
theorem eq_2_5 : succSet (ofNat 6 U ofNat 10) = ofNat 7 U ofNat 11 := by
  ext k
  constructor
  * intro <n, hn, hk>
  rcases hn with h6 | h10
  * simp [ofNat] at h6; subst h6; simp [ofNat, hk]
  * simp [ofNat] at h10; subst h10; simp [ofNat, hk]
  * intro hk
  rcases hk with h7 | h11

```

Lean 4 source (lines 801–1200)

```

* simp [ofNat] at h7; exact <6, Or.inl (by simp [ofNat]), by simp [h7]>

```

```

    * simp [ofNat] at h11; exact <10, Or.inr (by simp [ofNat]), by simp [h11]>

/-- **Scott 1976, (2.6).** `0 ? 1 = False`. -/
theorem eq_2_6 : predSet (ofNat 0) = botElem := by
  ext k
  simp [predSet, ofNat, botElem]

/-- **Scott 1976, (2.19)-(2.21).** Finite sequences as distributive functions. -/
def seq0 : Pomega := botElem

def seq1 (x : Pomega) : Pomega :=
  graph (fun z => condSet z x botElem)

def seq2 (x y : Pomega) : Pomega :=
  graph (fun z => condSet z x (condSet (predSet z) y botElem))

theorem seq2_body_isScottContinuous (x y : Pomega) :
  IsScottContinuous (fun z => condSet z x (condSet (predSet z) y botElem)) := by
  intro z
  have H := theorem_1_3_diag (x := z)
  (f := fun z w => condSet z x (condSet (predSet w) y botElem))
  (fun _w => condSet_isScottContinuous_left x _)
  (fun _z =>
    theorem_1_3 (condSet_isScottContinuous_right _z x)
    (theorem_1_3 (condSet_isScottContinuous_left y botElem)
      predSet_isScottContinuous))
  ext k
  constructor
  * intro hk
  have : k in ? n, {k | e n subseq z /\
    k in condSet (e n) x (condSet (predSet (e n)) y botElem)} := by
    rwa [ <- H]
  obtain <n, hn, hkn> := Set.mem_iUnion.mp this
  exact mem_scottUnion.mpr <n, hn, hkn>
  * intro hk
  obtain <n, hn, hkn> := mem_scottUnion.mp hk
  have : k in ? n, {k | e n subseq z /\
    k in condSet (e n) x (condSet (predSet (e n)) y botElem)} :=
    Set.mem_iUnion.mpr <n, hn, hkn>
  rwa [ <- H] at this

theorem seq2_app (x y z : Pomega) :
  funOf (seq2 x y) z = condSet z x (condSet (predSet z) y botElem) :=
  beta (seq2_body_isScottContinuous x y) z

theorem seq2_app_zero (x y : Pomega) : funOf (seq2 x y) (ofNat 0) = x := by
  rw [seq2_app]
  ext n
  simp [condSet, predSet, ofNat, botElem]

theorem seq2_app_one (x y : Pomega) : funOf (seq2 x y) (ofNat 1) = y := by
  rw [seq2_app]
  ext n
  simp [condSet, predSet, ofNat, botElem]

theorem seq2_tag_ne (x y : Pomega) :
  seq2 (ofNat 0) x != seq2 (ofNat 1) y := by
  intro h
  have hfuns := congrArg (fun w => funOf w (ofNat 0)) h
  have hx : (0 : Nat) in funOf (seq2 (ofNat 0) x) (ofNat 0) :=
    <1, fun k hk =>
      match k, hk with
      | 0, _ => rfl

```



```

    | k + 1, hk =>
      False.elim (Bool.false_ne_true
        (((Nat.testBit_succ 1 k).trans (Nat.zero_testBit k)).symm.trans hk)),
        <1, 0, rfl, Or.inl <rfl, rfl>>>
have hy : (0 : Nat) notin funOf (seq2 (ofNat 1) y) (ofNat 0) := by
  intro <k, hk, hp>
  rcases hp with <k', m, heq, hm>
  obtain <rfl, rfl> := pair_inj heq
  rcases hm with <h1, _> | <_, <t, ht>>
  * exact Nat.zero_ne_one h1
  * exact Nat.succ_ne_zero t (hk ht)
exact hy (hfun |> hx)

/-- **Scott 1976, (2.28).** Least-fixed-point unfolding `Y(g(x)) = g(x)(Y(g(x)))`. -/
theorem eq_2_28 {g : Pomega -> Pomega -> Pomega}
  (hgy : forall x, IsScottContinuous (fun y => g x y)) (x : Pomega) :
  fix (g x) = g x (fix (g x)) :=
  (theorem_1_4 (hgy x)).1.symm

/-- **Scott 1976, (2.3).** Relational composition. -/
def relComp (x y : Pomega) : Pomega :=
  {p | exists n m l, p = pair n l /\ pair n m in x /\ pair m l in y}

/-- **Scott 1976, (2.4).** Set-sum. -/
def setSum (x y : Pomega) : Pomega :=
  {k | exists n m, n in x /\ m in y /\ k = n + m}

/-- **Scott 1976, (2.7).** Conditional cases. -/
theorem eq_2_7_bot (x y : Pomega) : condSet botElem x y = botElem := by
  ext n
  simp [condSet, botElem]

theorem eq_2_7_zero (x y : Pomega) : condSet (ofNat 0) x y = x := by
  ext n
  simp [condSet, ofNat, botElem]

theorem eq_2_7_succ (x y : Pomega) (k : Nat) :
  condSet (ofNat (k + 1)) x y = y := by
  ext n
  simp [condSet, ofNat]

/-- **Scott 1976, (2.10).** Abstraction distributes over union. -/
theorem eq_2_10 (tau sigma : Pomega -> Pomega) :
  graph tau U graph sigma = graph (fun x => tau x U sigma x) := by
  ext p
  constructor
  * intro hp
  rcases hp with h | h
  * rcases h with <n, m, hp, hm>
    exact <n, m, hp, Or.inl hm>
  * rcases h with <n, m, hp, hm>
    exact <n, m, hp, Or.inr hm>
  * intro h
  rcases h with <n, m, hp, hm>
  rcases hm with hm | hm
  * exact Or.inl <n, m, hp, hm>
  * exact Or.inr <n, m, hp, hm>

/-- **Scott 1976, (2.12).** Abstraction distributes over intersection. -/
theorem eq_2_12 (tau sigma : Pomega -> Pomega) :
  graph tau I graph sigma = graph (fun x => tau x I sigma x) := by
  ext p
  constructor

```

```

* intro <htau, hsigma>
  rcases htau with <n, m, hptau, hmtau>
  rcases hsigma with <n', m', hpsigma, hmsigma>
  have hp' : pair n m = pair n' m' := hptau.symm.trans hpsigma
  obtain <rfl, rfl> := pair_inj hp'
  exact <n, m, hptau, hmtau, hmsigma>
* intro h
  rcases h with <n, m, hp, hmtau, hmsigma>
  exact <<n, m, hp, hmtau>, <n, m, hp, hmsigma>>

/-- **Scott 1976, (2.13).** Application distributes over arbitrary unions. -/
theorem eq_2_13 (F : Set Pomega) (x : Pomega) :
  funOf (?_0 F) x = ? u in F, funOf u x := by
  ext m
  constructor
* intro <n, hn, hp>
  obtain <u, hu, hpu> := Set.mem_sUnion.mp hp
  exact Set.mem_iUnion_2.mpr <u, hu, n, hn, hpu>
* intro hm
  obtain <u, hu, n, hn, hp> := Set.mem_iUnion_2.mp hm
  exact <n, hn, <u, hu, hp>>

theorem funOf_bot (x : Pomega) : funOf botElem x = botElem := by
  ext m
  simp [funOf, botElem]

theorem funOf_iUnion (xs : Nat -> Pomega) (x : Pomega) :
  funOf (? n, xs n) x = ? n, funOf (xs n) x := by
  ext m
  constructor
* intro <n, hn, hk>
  obtain <k, hmem> := Set.mem_iUnion.mp hk
  exact Set.mem_iUnion.mpr <k, <n, hn, hmem>>
* intro hm
  obtain <k, <n, hn, hmem>> := Set.mem_iUnion.mp hm
  exact <n, hn, Set.mem_iUnion.mpr <k, hmem>>

/-- **Scott 1976, (2.14).** `False = (fun x. x(x))(fun x. x(x))`. -/
theorem eq_2_14 :
  funOf (graph (fun x => funOf x x)) (graph (fun x => funOf x x)) = botElem := by
  have h? : omegaComb (graph fun x => x) = graph (fun x => funOf x x) := by
    ext p
    constructor
  * intro hp
    rcases hp with <n, m, rfl, hm>
    rw [theorem_1_2_i id_isScottContinuous] at hm
    exact <n, m, rfl, hm>
  * intro hp
    rcases hp with <n, m, rfl, hm>
    refine <n, m, rfl, ?_>
    rw [theorem_1_2_i id_isScottContinuous]
    exact hm
  rw [← h?, omega_first_recursion id_isScottContinuous]
  apply subset_antisymm
* intro k hk
  obtain <n, hkn> := Set.mem_iUnion.mp hk
  have : forall n, iterateBot (fun x => x) n = botElem := by
    intro n
    induction n with
    | zero => rfl
    | succ n ih => simp [iterateBot, ih]
  simpa [this n] using hkn
* intro k hk

```

```

exact hk.elim

theorem pair_zero_zero : pair 0 0 = 0 := by simp [pair]
theorem pair_one_zero : pair 1 0 = 1 := by simp [pair]

/-- **Scott 1976, (2.15).** `x U y = (fun z. 0) ? x, y`. -/
theorem eq_2_15 (x y : Pomega) :
  condSet (graph (fun _ => ofNat 0)) x y = x U y := by
  have h0 : 0 in graph (fun _ => ofNat 0) :=
    <0, 0, pair_zero_zero.symm, by simp [ofNat]>
  have h1 : 1 in graph (fun _ => ofNat 0) :=
    <1, 0, pair_one_zero.symm, by simp [ofNat]>
  ext n
  constructor
  * intro hn
    rcases hn with <hnx, _> | <hny, _>
    * exact Or.inl hnx
    * exact Or.inr hny
  * intro hn
    rcases hn with hnx | hny
    * exact Or.inl <hnx, h0>
    * exact Or.inr <hny, 0, h1>

/-- **Scott 1976, (2.16).** `top = Y(fun x. 0 U (x + 1))`. -/
def topRec (x : Pomega) : Pomega := ofNat 0 U succSet x

theorem topRec_isScottContinuous : IsScottContinuous topRec := by
  intro x
  ext k
  constructor
  * intro hk
    rcases hk with hk | <n, hn, rfl>
    * exact mem_scottUnion.mpr <0, by simp [e_zero], Or.inl hk>
    * exact mem_scottUnion.mpr <2 ^ n, by simp [e_pow2, Set.singleton_subset_iff, hn],
      Or.inr <n, by simp [e_pow2], rfl>
  * intro hk
    obtain <m, hm, hkm> := mem_scottUnion.mp hk
    rcases hkm with hk | <n, hn, rfl>
    * exact Or.inl hk
    * exact Or.inr <n, hm hn, rfl>

theorem eq_2_16 : fix topRec = topElem := by
  apply subset_antisymm
  * intro k _; trivial
  * intro k _
    have hiter : forall n, n in iterateBot topRec (n + 1) := by
      intro n
      induction n with
      | zero => simp [iterateBot, topRec, ofNat]
      | succ n ih =>
        refine Or.inr <n, ?, rfl>
        simpa [iterateBot] using ih
    exact Set.mem_iUnion.mpr <k + 1, hiter k>

/-- **Scott 1976, Table 1 (?) fails.** Not every element is a graph. -/
theorem eta_fails : exists u, graph (funOf u) != u := by
  refine <{pair 1 0}, ?_>
  intro h
  have hG : IsGraph {pair 1 0} := (theorem_1_2_iii _).mp h
  have hsub : e 1 subseq e 3 := by
    intro k hk
    have : k = 0 := by

```

```

    simp [e_one] using hk
    subst this
    decide
    have : pair 3 0 in ({pair 1 0} : Pomega) :=
      hG (by simp) hsub
    have : pair 3 0 = pair 1 0 := this
    exact (by simp [pair] : pair 3 0 != pair 1 0) this

/-- **Scott 1976, Table 1 (?).** Abstraction is monotone. -/
theorem xi_star {tau sigma : Pomega -> Pomega} (h : forall x, tau x subseq sigma x) :
  graph tau subseq graph sigma := by
  intro p hp
  rcases hp with <n, m, rfl, hm>
  exact <n, m, rfl, h _ hm>

/-- **Scott 1976, Table 1 (?).** Application is monotone. -/
theorem table1_mu {u v x y : Pomega} (hu : u subseq v) (hx : x subseq y) :
  funOf u x subseq funOf v y :=
  mu_low hu hx

/-- Combinatory expressions generated from the six constants and variables. -/
inductive Comb where
  | var : Nat -> Comb
  | zero | suc | pred | cond | K | S
  | app : Comb -> Comb -> Comb

def ofComb : Comb -> (Nat -> Pomega) -> Pomega
  | .var i, ? => ? i
  | .zero, _ => zeroC
  | .suc, _ => sucC
  | .pred, _ => predC
  | .cond, _ => condC
  | .K, _ => Kcomb
  | .S, _ => Scomb
  | .app u v, ? => funOf (ofComb u ?) (ofComb v ?)

def abs (i : Nat) : Comb -> Comb
  | .var j => if j = i then .app (.app .S .K) .K else .app .K (.var j)
  | .zero => .app .K .zero
  | .suc => .app .K .suc
  | .pred => .app .K .pred
  | .cond => .app .K .cond
  | .K => .app .K .K
  | .S => .app .K .S
  | .app u v => .app (.app .S (abs i u)) (abs i v)

def erase : Term -> Comb
  | .var i => .var i
  | .zero => .zero
  | .succ t => .app .suc (erase t)
  | .pred t => .app .pred (erase t)
  | .cond z x y => .app (.app (.app .cond (erase x)) (erase y)) (erase z)
  | .app u x => .app (erase u) (erase x)
  | .lam i body => abs i (erase body)

theorem sucC_app (x : Pomega) : funOf sucC x = succSet x :=
  beta succSet_isScottContinuous x

theorem predC_app (x : Pomega) : funOf predC x = predSet x :=
  beta predSet_isScottContinuous x

theorem Kcomb_beta (x : Pomega) :
  funOf Kcomb x = graph (fun _ => x) :=

```

```

beta (graph_const_isScottContinuous (fun x _ => x)
      (fun _ => id_isScottContinuous)) x

theorem Kcomb_beta2 (x y : Pomega) : funOf (funOf Kcomb x) y = x := by
  rw [Kcomb_beta]
  exact beta (const_isScottContinuous x) y

theorem Scomb_inner_cont (u v : Pomega) :
  IsScottContinuous (fun x => funOf (funOf u x) (funOf v x)) :=
  theorem_1_3_tuple
    (fun y => funOf_isScottContinuous_left y)
    (fun t => funOf_isScottContinuous t)
    (funOf_isScottContinuous u)
    (funOf_isScottContinuous v)

theorem Scomb_mid_cont (u : Pomega) :
  IsScottContinuous (fun v =>
    graph (fun x => funOf (funOf u x) (funOf v x))) :=
  graph_const_isScottContinuous
    (fun v x => funOf (funOf u x) (funOf v x))
    (fun x => theorem_1_3 (funOf_isScottContinuous (funOf u x))
      (funOf_isScottContinuous_left x))

theorem Scomb_map_cont :
  IsScottContinuous (fun u => graph (fun v =>
    graph (fun x => funOf (funOf u x) (funOf v x)))) :=
  graph_const_isScottContinuous
    (fun u v => graph (fun x => funOf (funOf u x) (funOf v x)))
    (fun v => graph_const_isScottContinuous
      (fun u x => funOf (funOf u x) (funOf v x))
      (fun x => theorem_1_3
        (f := fun t => funOf t (funOf v x))
        (g := fun u => funOf u x)
        (funOf_isScottContinuous_left (funOf v x))
        (funOf_isScottContinuous_left x))))

theorem Scomb_beta (f : Pomega) :
  funOf Scomb f =
    graph (fun v => graph (fun x => funOf (funOf f x) (funOf v x))) :=
  beta Scomb_map_cont f

theorem Scomb_beta2 (f g : Pomega) :
  funOf (funOf Scomb f) g =
    graph (fun x => funOf (funOf f x) (funOf g x)) := by
  rw [Scomb_beta]
  exact beta (Scomb_mid_cont f) g

theorem Scomb_beta3 (f g x : Pomega) :
  funOf (funOf (funOf Scomb f) g) x = funOf (funOf f x) (funOf g x) := by
  rw [Scomb_beta2]
  exact beta (Scomb_inner_cont f g) x

theorem condC_map_cont :
  IsScottContinuous (fun x => graph (fun y => graph (fun z => condSet z x y))) :=
  graph_const_isScottContinuous
    (fun x y => graph (fun z => condSet z x y))
    (fun y => graph_const_isScottContinuous (fun x z => condSet z x y)
      (fun z => condSet_isScottContinuous_mid z y))

theorem condC_beta (x : Pomega) :
  funOf condC x = graph (fun y => graph (fun z => condSet z x y)) :=
  beta condC_map_cont x

```

```

theorem condC_beta2 (x y : Pomega) :
  funOf (funOf condC x) y = graph (fun z => condSet z x y) := by
  rw [condC_beta]
  exact beta (graph_const_isScottContinuous (fun y z => condSet z x y)
    (fun z => condSet_isScottContinuous_right z x)) y

theorem condC_beta3 (x y z : Pomega) :
  funOf (funOf (funOf condC x) y) z = condSet z x y := by
  rw [condC_beta2]
  exact beta (condSet_isScottContinuous_left x y) z

/-- **Scott 1976, S2.** The subspace `FUN` of graphs. -/
def FUN : Set Pomega := {u | u = graph (funOf u)}

/-- **Scott 1976, (2.15)** as a combinator: `cond(x)(y)(K(0)) = x U y`. -/
theorem union_via_cond (x y : Pomega) :
  funOf (funOf (funOf condC x) y) (funOf Kcomb zeroC) = x U y := by
  rw [condC_beta3, Kcomb_beta]
  exact eq_2_15 x y

theorem SKK_eq_I : funOf (funOf Scomb Kcomb) Kcomb = graph (fun x => x) := by

```

Lean 4 source (lines 1201–1600)

```

  rw [Scomb_beta2]
  apply congrArg graph
  funext x
  simp [Kcomb_beta2]

theorem ofComb_update_isScottContinuous (c : Comb) (? : Nat -> Pomega) (i : Nat) :
  IsScottContinuous (fun v => ofComb c (envSet ? i v)) := by
  induction c generalizing ? i with
  | var j =>
    intro x
    by_cases hj : j = i
    * subst hj; simp [ofComb, envSet, Function.update] using id_isScottContinuous x
    * simp [ofComb, envSet, Function.update, hj] using const_isScottContinuous (? j) x
  | zero => intro x; simp [ofComb] using const_isScottContinuous zeroC x
  | suc => intro x; simp [ofComb] using const_isScottContinuous sucC x
  | pred => intro x; simp [ofComb] using const_isScottContinuous predC x
  | cond => intro x; simp [ofComb] using const_isScottContinuous condC x
  | K => intro x; simp [ofComb] using const_isScottContinuous Kcomb x
  | S => intro x; simp [ofComb] using const_isScottContinuous Scomb x
  | app u v iu iv =>
    exact theorem_1_3_tuple
      (fun y => funOf_isScottContinuous_left y)
      (fun t => funOf_isScottContinuous t)
      (iu ? i) (iv ? i)

theorem abs_correct (i : Nat) (c : Comb) (? : Nat -> Pomega) :
  ofComb (abs i c) ? = graph (fun v => ofComb c (envSet ? i v)) := by
  induction c generalizing ? with
  | var j =>
    simp only [abs, ofComb]
    by_cases hj : j = i
    * rw [if_pos hj]
      simp only [ofComb]
      convert SKK_eq_I
      funext v
      simp [envSet, Function.update, hj]
    * rw [if_neg hj]
      simp [ofComb, Kcomb_beta, envSet, Function.update, hj]
  | zero => simp [abs, ofComb, Kcomb_beta]

```

```

| suc => simp [abs, ofComb, Kcomb_beta]
| pred => simp [abs, ofComb, Kcomb_beta]
| cond => simp [abs, ofComb, Kcomb_beta]
| K => simp [abs, ofComb, Kcomb_beta]
| S => simp [abs, ofComb, Kcomb_beta]
| app u v iu iv =>
  simp only [abs, ofComb]
  rw [Scomb_beta2, iu, iv]
  congr 1
  funext x
  rw [theorem_1_2_i (ofComb_update_isScottContinuous u ? i)]
  rw [theorem_1_2_i (ofComb_update_isScottContinuous v ? i)]

theorem erase_correct (t : Term) (? : Nat -> Pomega) :
  ofComb (erase t) ? = interp t ? := by
  induction t generalizing ? with
  | var i => simp [erase, ofComb, interp]
  | zero => simp [erase, ofComb, interp, zeroC]
  | succ t ih => simp [erase, ofComb, interp, sucC_app, ih]
  | pred t ih => simp [erase, ofComb, interp, predC_app, ih]
  | cond z x y iz ix iy =>
    simp [erase, ofComb, interp, condC_beta3, iz, ix, iy]
  | app u x iu ix => simp [erase, ofComb, interp, iu, ix]
  | lam i body ih =>
    simp only [erase, interp]
    rw [abs_correct]
    congr 1
    funext v
    exact ih (envSet ? i v)

/-- **Scott 1976, Theorem 2.4 (The combinator theorem).** Every LAMBDA
term equals an applicative combination of the six constants and its
free variables. -/
theorem theorem_2_4_complete (t : Term) (? : Nat -> Pomega) :
  interp t ? = ofComb (erase t) ? :=
  (erase_correct t ?).symm

theorem ofComb_combinatory (c : Comb) (? : Nat -> Pomega)
  (h? : forall i, IsCombinatory (? i)) :
  IsCombinatory (ofComb c ?) := by
  induction c with
  | var i => exact h? i
  | zero => exact .zero
  | suc => exact .suc
  | pred => exact .pred
  | cond => exact .cond
  | K => exact .K
  | S => exact .S
  | app _ _ iu iv => exact .app iu iv

theorem theorem_2_4_closed (t : Term) :
  IsCombinatory (interp t (fun _ => botElem)) := by
  rw [theorem_2_4_complete]
  refine ofComb_combinatory _ _ fun _ => ?_
  have hbot : funOf predC zeroC = botElem := by
    rw [predC_app]; exact eq_2_6
  exact hbot |> IsCombinatory.app IsCombinatory.pred IsCombinatory.zero

/-- **Scott 1976, (2.18).** Constants as graphs of constant maps. -/
theorem eq_2_18_bot : botElem = graph (fun _ => botElem) := by
  ext p
  constructor
  * intro hp; exact hp.elim

```

```

* intro hp
  rcases hp with <_, _, _, hm>
  simp [botElem] at hm

theorem eq_2_18_top : topElem = graph (fun _ => topElem) := by
  ext p
  constructor
  * intro _
    obtain <n, m, rfl> := exists_pair p
    exact <n, m, rfl, Set.mem_univ m>
  * intro; trivial

/-- **Scott 1976, (2.22).** Longer sequences by cons. -/
def seqCons (x xs : Pomega) : Pomega :=
  graph (fun z => condSet z x (funOf xs (predSet z)))

theorem seqCons_body (x xs : Pomega) :
  IsScottContinuous (fun z => condSet z x (funOf xs (predSet z))) :=
  theorem_1_3_tuple
    (fun _ => condSet_isScottContinuous_left x _)
    (fun z => condSet_isScottContinuous_right z x)
    id_isScottContinuous
    (theorem_1_3 (funOf_isScottContinuous xs) predSet_isScottContinuous)

theorem eq_2_22 (x xs z : Pomega) :
  funOf (seqCons x xs) z = condSet z x (funOf xs (predSet z)) :=
  beta (seqCons_body x xs) z

/-- **Scott 1976, (2.23).** Projection of a binary sequence. -/
theorem eq_2_23_zero (x y : Pomega) : funOf (seq2 x y) (ofNat 0) = x :=
  seq2_app_zero x y

theorem eq_2_23_one (x y : Pomega) : funOf (seq2 x y) (ofNat 1) = y :=
  seq2_app_one x y

theorem eq_2_23_ge (x y : Pomega) (n : Nat) :
  funOf (seq2 x y) (ofNat (n + 2)) = botElem := by
  rw [seq2_app]
  ext k
  simp [condSet, predSet, ofNat, botElem]

/-- **Scott 1976, (2.1).** Maximal extension by cases. -/
theorem eq_2_1_empty (p : Nat -> Pomega) :
  maxExtend p botElem = ? n, p n := by
  ext k
  constructor
  * intro hk
    rcases hk with <_, hall> | h | h
    * exact Set.mem_iInter.mpr hall
    * rcases h with <n, hn, _>
      have : n in ({ } : Pomega) := by
        have : ({ } : Pomega) = ofNat n := hn
        rw [this]; simp [ofNat]
      exact this.elim
    * exact (h.1 rfl).elim
  * intro hk
    exact Or.inl <rfl, fun n => Set.mem_iInter.mp hk n>

theorem eq_2_1_singleton (p : Nat -> Pomega) (n : Nat) :
  maxExtend p (ofNat n) = p n := by
  ext k
  constructor
  * intro hk

```



```

rcases hk with <he, _> | <m, hm, hkm> | <_, hall>
* have hne : ofNat n != {} := Set.Nonempty.ne_empty <n, (rfl : n in ofNat n)>
  exact (hne he).elim
* have : n = m := by
  have hn : n in ofNat m := hm |> (rfl : n in ofNat n)
  simp [ofNat] using hn
  subst this; exact hkm
* exact (hall n rfl).elim
* intro hk
  exact Or.inr (Or.inl <n, rfl, hk>)

theorem eq_2_1_else (p : Nat -> Pomega) {x : Pomega}
  (hne : x != botElem) (hsing : forall n, x != ofNat n) :
  maxExtend p x = topElem := by
ext k
constructor
* intro; trivial
* intro
  exact Or.inr (Or.inr <hne, hsing>)

/-- **Scott 1976, (2.7), remaining cases.** -/
theorem eq_2_7_pos (x y z : Pomega) (h0 : 0 notin z) (hne : z != botElem) :
  condSet z x y = y := by
have hpos : exists t, t + 1 in z := by
  obtain <k, hk> := Set.nonempty_iff_ne_empty.mpr hne
  have : k != 0 := fun h => h0 (h |> hk)
  exact <k - 1, by
    have : k = (k - 1) + 1 := (Nat.succ_pred_eq_of_ne_zero this).symm
    rwa [← this]>
ext n
constructor
* intro hn
  rcases hn with <_, hz> | <hny, _>
  * exact (h0 hz).elim
  * exact hny
* intro hny
  exact Or.inr <hny, hpos>

theorem eq_2_7_mix (x y z : Pomega) (h0 : 0 in z) (hne : z != ofNat 0) :
  condSet z x y = x U y := by
have hpos : exists t, t + 1 in z := by
  by_contra h
  apply hne
ext k
constructor
* intro hk
  have : k = 0 := by
    by_contra hk0
    exact h <k - 1, by
      have : k = (k - 1) + 1 := (Nat.succ_pred_eq_of_ne_zero hk0).symm
      rwa [← this]>
  simp [this, ofNat]
* intro hk
  simp [ofNat] at hk
  subst hk
  exact h0
ext n
constructor
* intro hn
  rcases hn with <hnx, _> | <hny, _>
  * exact Or.inl hnx
  * exact Or.inr hny
* intro hn

```

```

    rcases hn with hnx | hny
    * exact Or.inl <hnx, h0>
    * exact Or.inr <hny, hpos>

/-- **Scott 1976, (2.11).** Equality when both arguments are graphs. -/
theorem eq_2_11_graphs {f g : Pomega} (hf : IsGraph f) (hg : IsGraph g)
  (x : Pomega) : funOf (f I g) x = funOf f x I funOf g x := by
  apply subset_antisymm (eq_2_11 f g x)
  intro m <hf', hg'>
  obtain <k, hk, hfk> := hf'
  obtain <l, hl, hgl> := hg'
  refine <k ||| l, e_or_of_subset hk hl, <?_, ?_>>
  * exact hf hfk (by rw [e_or]; exact Set.subset_union_left)
  * exact hg hgl (by rw [e_or]; exact Set.subset_union_right)

/-- **Scott 1976, (2.17), fundamental equation.** -/
theorem eq_2_17_step (x y : Pomega) :
  x I y =
    condSet x (condSet y (ofNat 0) botElem)
      (succSet (predSet x I predSet y)) := by
  ext n
  constructor
  * intro <hnx, hny>
  cases n with
  | zero =>
    exact Or.inl <Or.inl <rfl, hny>, hnx>
  | succ n =>
    refine Or.inr <<n, <hnx, hny>, rfl>, n, hnx>
  * intro hn
  rcases hn with <hL, h0x> | <<k, hk, rfl>, _t, _ht>
  * rcases hL with <hk0, h0y> | <hbot, _>
  * simp [ofNat] at hk0; subst hk0
    exact <h0x, h0y>
  * simp [botElem] at hbot
  * exact <hk.1, hk.2>

/-- Least operator solving the (2.17) recursion. -/
def interStep (f : Pomega) : Pomega :=
  graph (fun x => graph (fun y =>
    condSet x (condSet y (ofNat 0) botElem)
      (succSet (funOf (funOf f (predSet x)) (predSet y))))))

theorem interStep_isScottContinuous :
  IsScottContinuous interStep := by
  refine graph_const_isScottContinuous
    (fun f x => graph (fun y =>
      condSet x (condSet y (ofNat 0) botElem)
        (succSet (funOf (funOf f (predSet x)) (predSet y)))))) ?_
  intro x
  refine graph_const_isScottContinuous
    (fun f y =>
      condSet x (condSet y (ofNat 0) botElem)
        (succSet (funOf (funOf f (predSet x)) (predSet y)))) ?_
  intro y
  refine theorem_1_3
    (condSet_isScottContinuous_right x (condSet y (ofNat 0) botElem)) ?_
  refine theorem_1_3 succSet_isScottContinuous ?_
  exact theorem_1_3
    (f := fun t => funOf t (predSet y))
    (g := fun f => funOf f (predSet x))
    (funOf_isScottContinuous_left (predSet y))
    (funOf_isScottContinuous_left (predSet x))

```

```

def interC : Pomega := fix interStep

theorem interC_unfold : interC = interStep interC :=
  (theorem_1_4 interStep_isScottContinuous).1.symm

theorem interC_else_isScottContinuous (y : Pomega) :
  IsScottContinuous (fun x =>
    succSet (funOf (funOf interC (predSet x)) (predSet y))) := by
  refine theorem_1_3 (f := succSet) (g := fun x =>
    funOf (funOf interC (predSet x)) (predSet y))
  succSet_isScottContinuous ?_
  refine theorem_1_3
  (f := fun t => funOf t (predSet y))
  (g := fun x => funOf interC (predSet x))
  (funOf_isScottContinuous_left (predSet y)) ?_
  exact theorem_1_3 (funOf_isScottContinuous interC) predSet_isScottContinuous

theorem interC_body_isScottContinuous :
  IsScottContinuous (fun x =>
    graph (fun y =>
      condSet x (condSet y (ofNat 0) botElem)
      (succSet (funOf (funOf interC (predSet x)) (predSet y))))) :=
  graph_const_isScottContinuous
  (fun x y =>
    condSet x (condSet y (ofNat 0) botElem)
    (succSet (funOf (funOf interC (predSet x)) (predSet y))))
  (fun y =>
    theorem_1_3_tuple
    (fun els => condSet_isScottContinuous_left
      (condSet y (ofNat 0) botElem) els)
    (fun tes => condSet_isScottContinuous_right tes
      (condSet y (ofNat 0) botElem))
    id_isScottContinuous
    (interC_else_isScottContinuous y))

theorem interC_app_graph (x : Pomega) :
  funOf interC x =
    graph (fun y =>
      condSet x (condSet y (ofNat 0) botElem)
      (succSet (funOf (funOf interC (predSet x)) (predSet y)))) := by
  nth_rw 1 [interC_unfold]
  exact beta interC_body_isScottContinuous x

theorem interC_then_else_isScottContinuous (x : Pomega) :
  IsScottContinuous (fun y =>
    condSet x (condSet y (ofNat 0) botElem)
    (succSet (funOf (funOf interC (predSet x)) (predSet y)))) :=
  theorem_1_3_tuple
  (fun els => condSet_isScottContinuous_mid x els)
  (fun th => condSet_isScottContinuous_right x th)
  (condSet_isScottContinuous_left (ofNat 0) botElem)
  (theorem_1_3 succSet_isScottContinuous
    (theorem_1_3 (funOf_isScottContinuous (funOf interC (predSet x)))
      predSet_isScottContinuous))

theorem interC_app (x y : Pomega) :
  funOf (funOf interC x) y =
    condSet x (condSet y (ofNat 0) botElem)
    (succSet (funOf (funOf interC (predSet x)) (predSet y))) := by
  rw [interC_app_graph]
  exact beta (interC_then_else_isScottContinuous x) y

/-- **Scott 1976, (2.17).** `x I y = Y(fun f fun x fun y. x ? (y ? 0, False), f(x?1)(y?1)+1)(

```

```

x)(y)`. -/
theorem eq_2_17 (x y : Pomega) :
  funOf (funOf interC x) y = x I y := by
  have hmem : forall n x y, n in funOf (funOf interC x) y <-> n in x I y := by
    intro n
    induction n using Nat.strong_induction_on with
    | h n ih =>
      intro x y
      rw [interC_app]
      constructor
      * intro hn
        rcases hn with <hL, h0x> | <<k, hk, rfl>, _t, _ht>
        * rcases hL with <hk0, h0y> | <hbot, _>
          * simp [ofNat] at hk0; subst hk0
            exact <h0x, h0y>
          * simp [botElem] at hbot
        * have hk' : k in predSet x I predSet y :=
            (ih k (Nat.lt_succ_self k) (predSet x) (predSet y)).mp hk
            exact <hk'.1, hk'.2>
      * intro <hn, hny>
        cases n with
        | zero => exact Or.inl <Or.inl <rfl, hny>, hn>
        | succ k =>
          refine Or.inr <<k, ?, rfl>, k, hn>
          exact (ih k (Nat.lt_succ_self k) (predSet x) (predSet y)).mpr <hn, hny>
    ext n
  exact hmem n x y

theorem triangle_eq_zero {w : Nat} (h : triangle w = 0) : w = 0 := by
  match w with
  | 0 => rfl
  | n + 1 =>
    have h1 : 1 <= n + 1 := Nat.succ_le_succ (Nat.zero_le _)
    have h2 : 2 <= (n + 1) * (n + 2) :=
      calc 2 <= 1 * 2 := by decide
      _ <= (n + 1) * (n + 2) := Nat.mul_le_mul h1 (Nat.succ_le_succ h1)
    have : 0 < (n + 1) * (n + 2) / 2 := Nat.div_pos h2 (by decide)
    exact (Nat.ne_of_gt this h).elim

theorem pair_eq_right {n m : Nat} (h : pair n m = m) : n = 0 /\ m = 0 := by
  have : triangle (n + m) = 0 := by
    have h' : triangle (n + m) + m = m := by simpa [pair_eq_triangle] using h
    omega
  have : n + m = 0 := triangle_eq_zero this
  omega

```

Lean 4 source (lines 1601–2000)

```

lemma exists_least_not_mem {a : Pomega} (hex : exists k, k notin a) :
  exists k, k notin a /\ forall i < k, i in a := by
  have : forall n, n notin a -> exists k <= n, k notin a /\ forall i < k, i in a
    := by
    intro n
    induction n using Nat.strong_induction_on with
    | h n ih =>
      intro hn
      rcases Classical.em (forall i < n, i in a) with hmin | hmin
      * exact <n, le_rfl, hn, hmin>
      * obtain <i, hi> := not_forall.mp hmin
        have hi' : i < n := (Classical.not_imp.mp hi).1
        have hia : i notin a := (Classical.not_imp.mp hi).2
        obtain <k, hki, hk, hall> := ih i hi' hia
        exact <k, hki.trans hi'.le, hk, hall>
  obtain <n, hn> := hex

```

```

obtain <k, _, hk, hall> := this n hn
exact <k, hk, hall>

lemma exists_least_mem {a : Pomega} (hex : exists k, k in a) :
  exists k, k in a /\ forall i < k, i notin a := by
  have : forall n, n in a -> exists k <= n, k in a /\ forall i < k, i notin a :=
    by
      intro n
      induction n using Nat.strong_induction_on with
      | h n ih =>
        intro hn
        rcases Classical.em (forall i < n, i notin a) with hmin | hmin
        * exact <n, le_rfl, hn, hmin>
        * obtain <i, hi> := not_forall.mp hmin
          have hi' : i < n := (Classical.not_imp.mp hi).1
          have hia : i in a := not_not.mp (Classical.not_imp.mp hi).2
          obtain <k, hki, hk, hall> := ih i hi' hia
          exact <k, hki.trans hi'.le, hk, hall>
  obtain <n, hn> := hex
  obtain <k, _, hk, hall> := this n hn
  exact <k, hk, hall>

/-- **Scott 1976, (2.18).** `a = fun x. a` iff `a = False` or `a = top`. -/
theorem eq_2_18 (a : Pomega) :
  a = graph (fun _ => a) <-> a = botElem /\ a = topElem := by
  constructor
  * intro ha
  by_cases htop : a = topElem
  * exact Or.inr htop
  * have hex : exists k, k notin a := by
      by_contra h
      apply htop
      ext k
      constructor
      * intro; trivial
      * intro
        exact not_not.mp (not_exists.mp h k)
  obtain <k, hk, hmin> := exists_least_not_mem hex
  obtain <n, m, hnm> := exists_pair k
  have hm : m notin a := by
    intro hma
    have : pair n m in a :=
      ha.symm |> (<n, m, rfl, hma> : pair n m in graph (fun _ => a))
    exact hk (by rwa [hnm] at this)
  have : m = k :=
    le_antisymm (by rw [ <- hnm]; exact pair_le_right n m)
    (le_of_not_gt fun hlt => hm (hmin m hlt))
  have hnmk : pair n k = k := by simpa [this] using hnm
  have <_, hk0> := pair_eq_right hnmk
  have h0 : 0 notin a := by simpa [hk0] using hk
  by_cases hbot : a = botElem
  * exact Or.inl hbot
  * obtain <l, hl, hlmin> := exists_least_mem (Set.nonempty_iff_ne_empty.mpr hbot)
  obtain <i, j, hij> := exists_pair l
  have hj : j in a := by
    have : pair i j in graph (fun _ => a) :=
      ha |> (by rwa [hij] : pair i j in a)
    rcases this with <i', j', hp, hj'>
    obtain <rfl, rfl> := pair_inj hp
    exact hj'
  have : j = l :=
    le_antisymm (by rw [ <- hij]; exact pair_le_right i j)
    (le_of_not_gt fun hlt => hlmin j hlt hj)

```

```

        have hil : pair i l = l := by simpa [this] using hij
        have <_, hl0> := pair_eq_right hil
        exact (h0 (by simpa [hl0] using hl)).elim
    * intro h
      rcases h with rfl | rfl
    * exact eq_2_18_bot
    * exact eq_2_18_top

/-- **Scott 1976, (2.24)-(2.25). ** Revaluation as a distributive sequence. -/
def seqFun (u x : Pomega) : Pomega :=
  ? i in x, funOf u (ofNat i)

def dollarC : Pomega :=
  graph (fun u => graph (fun x => seqFun u x))

theorem seqFun_right_isScottContinuous (u : Pomega) :
  IsScottContinuous (fun x => seqFun u x) := by
  intro x
  ext k
  constructor
  * intro hk
    obtain <i, hi, hki> := Set.mem_iUnion_2.mp hk
    exact mem_scottUnion.mpr <2 ^ i, by simp [e_pow2, Set.singleton_subset_iff, hi],
      Set.mem_iUnion_2.mpr <i, by simp [e_pow2], hki>>
  * intro hk
    obtain <n, hn, hkn> := mem_scottUnion.mp hk
    obtain <i, hi, hki> := Set.mem_iUnion_2.mp hkn
    exact Set.mem_iUnion_2.mpr <i, hn hi, hki>

theorem seqFun_left_isScottContinuous (x : Pomega) :
  IsScottContinuous (fun u => seqFun u x) := by
  intro u
  ext k
  constructor
  * intro hk
    obtain <i, hi, hki> := Set.mem_iUnion_2.mp hk
    have : k in scottUnion (fun v => funOf v (ofNat i)) u := by
      rw [← funOf_isScottContinuous_left (ofNat i) u]; exact hki
    obtain <n, hn, hkn> := mem_scottUnion.mp this
    exact mem_scottUnion.mpr <n, hn, Set.mem_iUnion_2.mpr <i, hi, hkn>>
  * intro hk
    obtain <n, hn, hkn> := mem_scottUnion.mp hk
    obtain <i, hi, hki> := Set.mem_iUnion_2.mp hkn
    exact Set.mem_iUnion_2.mpr <i, hi,
      isScottContinuous_monotone (funOf_isScottContinuous_left (ofNat i)) hn hki>

theorem dollarC_app (u : Pomega) :
  funOf dollarC u = graph (fun x => seqFun u x) :=
  beta (graph_const_isScottContinuous (fun u x => seqFun u x)
    (fun x => seqFun_left_isScottContinuous x)) u

/-- **Scott 1976, (2.25). ** `$(u) = fun x. ? {u_i | i in x}`. -/
theorem eq_2_25 (u x : Pomega) :
  funOf (funOf dollarC u) x = seqFun u x := by
  rw [dollarC_app]
  exact beta (seqFun_right_isScottContinuous u) x

/-- Shift of a sequence: `(fun t. u_{t+1})`. -/
def seqShift (u : Pomega) : Pomega :=
  graph (fun z => seqFun u (succSet z))

theorem seqShift_isScottContinuous (u : Pomega) :
  IsScottContinuous (fun z => seqFun u (succSet z)) :=

```

```

theorem_1_3 (seqFun_right_isScottContinuous u) succSet_isScottContinuous

theorem seqShift_app (u z : Pomega) :
  funOf (seqShift u) z = seqFun u (succSet z) :=
  beta (seqShift_isScottContinuous u) z

theorem seqShift_left_isScottContinuous : IsScottContinuous seqShift :=
  graph_const_isScottContinuous (fun u z => seqFun u (succSet z))
  (fun z => seqFun_left_isScottContinuous (succSet z))

theorem seqShift_ofNat (u : Pomega) (i : Nat) :
  funOf (seqShift u) (ofNat i) = funOf u (ofNat (i + 1)) := by
  rw [seqShift_app]
  ext m
  constructor
  * intro hm
    obtain <j, hj, hmj> := Set.mem_iUnion_2.mp hm
    simp [succSet, ofNat] at hj; subst hj; exact hmj
  * intro hm
    exact Set.mem_iUnion_2.mpr <i + 1, <i, rfl, rfl>, hm>

/-- **Scott 1976, (2.24).** `seq(u)(x) = x ? u_0, seq(fun t. u_{t+1})(x?1)`. -/
theorem eq_2_24 (u x : Pomega) :
  seqFun u x =
    condSet x (funOf u (ofNat 0))
    (seqFun (seqShift u) (predSet x)) := by
  ext k
  constructor
  * intro hk
    obtain <i, hi, hki> := Set.mem_iUnion_2.mp hk
    cases i with
    | zero => exact Or.inl <hki, hi>
    | succ i =>
      refine Or.inr <?, i, hi>
      refine Set.mem_iUnion_2.mpr <i, hi, ?_>
      have : funOf (seqShift u) (ofNat i) = funOf u (ofNat (i + 1)) := by
        rw [seqShift_app]
        ext m
        constructor
        * intro hm
          obtain <j, hj, hmj> := Set.mem_iUnion_2.mp hm
          simp [succSet, ofNat] at hj; subst hj; exact hmj
        * intro hm
          exact Set.mem_iUnion_2.mpr <i + 1, <i, rfl, rfl>, hm>
      simpa [this] using hki
  * intro hk
    rcases hk with <hk0, h0x> | <hpos, t, ht>
    * exact Set.mem_iUnion_2.mpr <0, h0x, hk0>
    * obtain <i, hi, hki> := Set.mem_iUnion_2.mp hpos
      have : funOf (seqShift u) (ofNat i) = funOf u (ofNat (i + 1)) := by
        rw [seqShift_app]
        ext m
        constructor
        * intro hm
          obtain <j, hj, hmj> := Set.mem_iUnion_2.mp hm
          simp [succSet, ofNat] at hj; subst hj; exact hmj
        * intro hm
          exact Set.mem_iUnion_2.mpr <i + 1, <i, rfl, rfl>, hm>
      refine Set.mem_iUnion_2.mpr <i + 1, hi, ?_>
      simpa [this] using hki

/-- **Scott 1976, (2.24).** The step of `$ = Y(fun s fun u fun z. z ? u_0, s(fun t. u_{t+1})(z
?1))`. -/

```

```

def dollarStepBody (s u z : Pomega) : Pomega :=
  condSet z (funOf u (ofNat 0))
  (funOf (funOf s (seqShift u)) (predSet z))

def dollarStep (s : Pomega) : Pomega :=
  graph (fun u => graph (fun z => dollarStepBody s u z))

theorem dollarStepBody_isScottContinuous_s (u z : Pomega) :
  IsScottContinuous (fun s => dollarStepBody s u z) := by
  have hinner : IsScottContinuous
    (fun s => funOf (funOf s (seqShift u)) (predSet z)) :=
    theorem_1_3 (f := fun w => funOf w (predSet z))
    (g := fun s => funOf s (seqShift u))
    (funOf_isScottContinuous_left (predSet z))
    (funOf_isScottContinuous_left (seqShift u))
  exact theorem_1_3 (condSet_isScottContinuous_right z (funOf u (ofNat 0))) hinner

theorem dollarStepBody_isScottContinuous_u (s z : Pomega) :
  IsScottContinuous (fun u => dollarStepBody s u z) := by
  have helse : IsScottContinuous
    (fun u => funOf (funOf s (seqShift u)) (predSet z)) :=
    theorem_1_3 (f := fun w => funOf w (predSet z))
    (g := fun u => funOf s (seqShift u))
    (funOf_isScottContinuous_left (predSet z))
    (theorem_1_3 (funOf_isScottContinuous s) seqShift_left_isScottContinuous)
  exact theorem_1_3_tuple
    (fun y => condSet_isScottContinuous_mid z y)
    (fun x => condSet_isScottContinuous_right z x)
    (funOf_isScottContinuous_left (ofNat 0)) helse

theorem dollarStepBody_isScottContinuous_z (s u : Pomega) :
  IsScottContinuous (fun z => dollarStepBody s u z) :=
  theorem_1_3_tuple
    (fun y => condSet_isScottContinuous_left (funOf u (ofNat 0)) y)
    (fun z => condSet_isScottContinuous_right z (funOf u (ofNat 0)))
    id_isScottContinuous
    (theorem_1_3 (funOf_isScottContinuous (funOf s (seqShift u)))
      predSet_isScottContinuous)

theorem dollarStep_isScottContinuous : IsScottContinuous dollarStep :=
  graph_const_isScottContinuous
    (fun s u => graph (fun z => dollarStepBody s u z))
    (fun u => graph_const_isScottContinuous
      (fun s z => dollarStepBody s u z)
      (fun z => dollarStepBody_isScottContinuous_s u z))

theorem dollarStep_app (s u : Pomega) :
  funOf (dollarStep s) u = graph (fun z => dollarStepBody s u z) :=
  beta (graph_const_isScottContinuous (fun u z => dollarStepBody s u z)
    (fun z => dollarStepBody_isScottContinuous_u s z)) u

theorem dollarStep_app2 (s u z : Pomega) :
  funOf (funOf (dollarStep s) u) z = dollarStepBody s u z := by
  rw [dollarStep_app]
  exact beta (dollarStepBody_isScottContinuous_z s u) z

/-- Finite stage of the `$` iteration: `? { u_i | i in x, i < n }`. -/
def seqFunLt (u x : Pomega) (n : Nat) : Pomega :=
  ? i in x, ? _ : i < n, funOf u (ofNat i)

theorem mem_seqFunLt {u x : Pomega} {n k : Nat} :
  k in seqFunLt u x n <-> exists i in x, i < n /\ k in funOf u (ofNat i) := by
  constructor

```



```

* intro hk
  obtain <i, hi, hrest> := Set.mem_iUnion_2.mp hk
  obtain <hlt, hki> := Set.mem_iUnion.mp hrest
  exact <i, hi, hlt, hki>
* intro <i, hi, hlt, hki>
  exact Set.mem_iUnion_2.mpr <i, hi, Set.mem_iUnion.mpr <hlt, hki>>

theorem seqFunLt_zero (u z : Pomega) : seqFunLt u z 0 = botElem := by
  ext k
  simp [mem_seqFunLt, botElem]

theorem seqFunLt_succ (u z : Pomega) (n : Nat) :
  condSet z (funOf u (ofNat 0)) (seqFunLt (seqShift u) (predSet z) n) =
    seqFunLt u z (n + 1) := by
  ext k
  constructor
* intro hk
  rcases hk with <hk0, h0z> | <hpos, t, ht>
* exact (mem_seqFunLt).mpr <0, h0z, Nat.succ_pos n, hk0>
* obtain <i, hi, hlt, hki> := (mem_seqFunLt).mp hpos
  refine (mem_seqFunLt).mpr <i + 1, hi, Nat.succ_lt_succ hlt, ?_>
  simpa [seqShift_ofNat] using hki
* intro hk
  obtain <i, hi, hlt, hki> := (mem_seqFunLt).mp hk
  cases i with
  | zero => exact Or.inl <hki, hi>
  | succ i =>
    refine Or.inr <?, i, hi>
    refine (mem_seqFunLt).mpr <i, hi, Nat.lt_of_succ_lt_succ hlt, ?_>
    simpa [seqShift_ofNat] using hki

theorem dollarStep_iterate (n : Nat) (u z : Pomega) :
  funOf (funOf (iterateBot dollarStep n) u) z = seqFunLt u z n := by
  induction n generalizing u z with
  | zero =>
    simp [iterateBot, funOf_bot, seqFunLt_zero]
  | succ n ih =>
    rw [iterateBot, dollarStep_app2, dollarStepBody, ih, seqFunLt_succ]

theorem seqFun_eq_iUnion_lt (u z : Pomega) :
  seqFun u z = ? n, seqFunLt u z n := by
  ext k
  constructor
* intro hk
  obtain <i, hi, hki> := Set.mem_iUnion_2.mp hk
  exact Set.mem_iUnion.mpr <i + 1, (mem_seqFunLt).mpr <i, hi, Nat.lt_succ_self i, hki>>
* intro hk
  obtain <n, hn> := Set.mem_iUnion.mp hk
  obtain <i, hi, _, hki> := (mem_seqFunLt).mp hn
  exact Set.mem_iUnion_2.mpr <i, hi, hki>

theorem dollarStep_fix_app (u z : Pomega) :
  funOf (funOf (fix dollarStep) u) z = seqFun u z := by
  have : funOf (funOf (fix dollarStep) u) z =
    ? n, funOf (funOf (iterateBot dollarStep n) u) z := by
    simp [fix, funOf_iUnion]
  rw [this, seqFun_eq_iUnion_lt]
  ext k
  constructor
* intro hk
  obtain <n, hn> := Set.mem_iUnion.mp hk
  exact Set.mem_iUnion.mpr <n, by simpa [dollarStep_iterate] using hn>
* intro hk

```

```

    obtain <n, hn> := Set.mem_iUnion.mp hk
    exact Set.mem_iUnion.mpr <n, by simp [dollarStep_iterate] using hn>

/-- **Scott 1976, (2.24).** `\$ = Y(fun s fun u fun z. z ? u_0, s(fun t. u_{t+1})(z?1))`. -/
theorem eq_2_24_Y : dollarC = fix dollarStep := by
  have hfix : dollarStep (fix dollarStep) = fix dollarStep :=
    (theorem_1_4 dollarStep_isScottContinuous).1
  have hbody : forall u z, dollarStepBody (fix dollarStep) u z = seqFun u z := by
    intro u z
    calc dollarStepBody (fix dollarStep) u z
      = funOf (funOf (dollarStep (fix dollarStep)) u) z :=
        (dollarStep_app2 _ _ _).symm
    _ = funOf (funOf (fix dollarStep) u) z := by rw [hfix]
    _ = seqFun u z := dollarStep_fix_app u z
  have : dollarStep (fix dollarStep) =
    graph (fun u => graph (fun z => seqFun u z)) := by
    apply congrArg graph
  funext u
  apply congrArg graph
  funext z
  exact hbody u z
  exact this.symm.trans hfix

/-- **Scott 1976, (2.24).** `\$ = Y(step)` as a combinator application. -/
theorem eq_2_24_Ycomb : funOf Ycomb (graph dollarStep) = dollarC := by
  rw [theorem_2_5 dollarStep_isScottContinuous, eq_2_24_Y]

/-- **Scott 1976, (2.26).** `fun n in ?. tau` is `\$` applied to a graph. -/
def lamOmega (tau : Nat -> Pomega) : Pomega :=
  funOf dollarC (graph (fun z => ? n in z, tau n))

/-- **Scott 1976, (2.27).** Primitive recursion as a distributive function. -/
def primRecVal (a f : Pomega) : Nat -> Pomega
| 0 => a
| n + 1 => funOf (funOf f (ofNat n)) (primRecVal a f n)

def primRecHat (a f x : Pomega) : Pomega :=
  ? n in x, primRecVal a f n

def primRecStep (a f u : Pomega) : Pomega :=
  graph (fun n => condSet n a (funOf (funOf f (predSet n)) (funOf u (predSet n))))

theorem primRecHat_zero (a f : Pomega) : primRecHat a f (ofNat 0) = a := by
  ext k
  constructor
  * intro hk
    obtain <n, hn, hkn> := Set.mem_iUnion_2.mp hk
    simp [ofNat] at hn; subst hn; simp [primRecVal] using hkn
  * intro hk
    exact Set.mem_iUnion_2.mpr <0, rfl, hk>

/-- **Scott 1976, (2.27).** The distributive extension agrees with the
integer recursion on singletons. -/
theorem primRecHat_ofNat (a f : Pomega) : forall n,
  primRecHat a f (ofNat n) = primRecVal a f n
| 0 => primRecHat_zero a f
| n + 1 => by
  ext k
  constructor
  * intro hk
    obtain <m, hm, hkm> := Set.mem_iUnion_2.mp hk
    simp [ofNat] at hm; subst hm; simp [primRecVal] using hkm
  * intro hk

```

```

exact Set.mem_iUnion_2.mpr <n + 1, rfl, hk>

theorem succSet_ofNat (j : Nat) : succSet (ofNat j) = ofNat (j + 1) := by
  ext k
  simp [succSet, ofNat]

theorem predSet_ofNat_succ (n : Nat) : predSet (ofNat (n + 1)) = ofNat n := by
  ext k
  simp [predSet, ofNat]

```

Lean 4 source (lines 2001–2400)

```

theorem primRecStep_body_isScottContinuous_n (a f u : Pomega) :
  IsScottContinuous (fun n =>
    condSet n a (funOf (funOf f (predSet n)) (funOf u (predSet n)))) :=
theorem_1_3_tuple
  (fun y => condSet_isScottContinuous_left a y)
  (fun n => condSet_isScottContinuous_right n a)
  id_isScottContinuous
  (theorem_1_3_tuple
    (fun y => funOf_isScottContinuous_left y)
    (fun x => funOf_isScottContinuous x)
    (theorem_1_3 (funOf_isScottContinuous f) predSet_isScottContinuous)
    (theorem_1_3 (funOf_isScottContinuous u) predSet_isScottContinuous))

theorem primRecStep_isScottContinuous (a f : Pomega) :
  IsScottContinuous (primRecStep a f) :=
graph_const_isScottContinuous
  (fun u n => condSet n a (funOf (funOf f (predSet n)) (funOf u (predSet n))))
  (fun n => theorem_1_3 (condSet_isScottContinuous_right n a)
    (theorem_1_3 (funOf_isScottContinuous (funOf f (predSet n)))
      (funOf_isScottContinuous_left (predSet n))))

theorem primRecStep_app (a f u n : Pomega) :
  funOf (primRecStep a f u) n =
    condSet n a (funOf (funOf f (predSet n)) (funOf u (predSet n))) :=
beta (primRecStep_body_isScottContinuous_n a f u) n

/-- **Scott 1976, (2.27).** The fixed point of the primrec step agrees
with integer recursion. -/
theorem primRecVal_fix (a f : Pomega) : forall n,
  funOf (fix (primRecStep a f)) (ofNat n) = primRecVal a f n
| 0 => by
  have hfix := (theorem_1_4 (primRecStep_isScottContinuous a f)).1
  calc funOf (fix (primRecStep a f)) (ofNat 0)
    = funOf (primRecStep a f (fix (primRecStep a f))) (ofNat 0) := by
      rw [hfix]
    _ = condSet (ofNat 0) a
      (funOf (funOf f (predSet (ofNat 0)))
        (funOf (fix (primRecStep a f)) (predSet (ofNat 0)))) :=
      primRecStep_app a f _ _
    _ = a := eq_2_7_zero _ _
| n + 1 => by
  have hfix := (theorem_1_4 (primRecStep_isScottContinuous a f)).1
  calc funOf (fix (primRecStep a f)) (ofNat (n + 1))
    = funOf (primRecStep a f (fix (primRecStep a f))) (ofNat (n + 1)) := by
      rw [hfix]
    _ = condSet (ofNat (n + 1)) a
      (funOf (funOf f (predSet (ofNat (n + 1))))
        (funOf (fix (primRecStep a f)) (predSet (ofNat (n + 1))))) :=
      primRecStep_app a f _ _
    _ = funOf (funOf f (ofNat n))
      (funOf (fix (primRecStep a f)) (ofNat n)) := by

```

```

    rw [eq_2_7_succ, predSet_ofNat_succ]
  _ = funOf (funOf f (ofNat n)) (primRecVal a f n) := by
    rw [primRecVal_fix a f n]

/-- **Scott 1976, (2.27).** `p = Y(fun u fun n in ?. n ? a, f(n?1)(u(n?1)))`. -/
theorem eq_2_27 (a f x : Pomega) :
  primRecHat a f x = funOf (funOf dollarC (fix (primRecStep a f))) x := by
  rw [eq_2_25]
  ext k
  constructor
  * intro hk
    obtain <n, hn, hkn> := Set.mem_iUnion_2.mp hk
    refine Set.mem_iUnion_2.mpr <n, hn, ?_>
    simp [primRecVal_fix] using hkn
  * intro hk
    obtain <n, hn, hkn> := Set.mem_iUnion_2.mp hk
    refine Set.mem_iUnion_2.mpr <n, hn, ?_>
    simp [primRecVal_fix] using hkn

theorem iterateBot_param_isScottContinuous
  {g : Pomega -> Pomega -> Pomega}
  (hgx : forall y, IsScottContinuous (fun x => g x y))
  (hgy : forall x, IsScottContinuous (fun y => g x y)) :
  forall n, IsScottContinuous (fun x => iterateBot (g x) n)
| 0 => const_isScottContinuous botElem
| n + 1 =>
  theorem_1_3_tuple (hgx) (hgy) id_isScottContinuous
    (iterateBot_param_isScottContinuous hgx hgy n)

theorem fix_param_isScottContinuous
  {g : Pomega -> Pomega -> Pomega}
  (hgx : forall y, IsScottContinuous (fun x => g x y))
  (hgy : forall x, IsScottContinuous (fun y => g x y)) :
  IsScottContinuous (fun x => fix (g x)) := by
  intro x
  ext k
  constructor
  * intro hk
    obtain <n, hkn> := Set.mem_iUnion.mp hk
    have := iterateBot_param_isScottContinuous hgx hgy n x
    have : k in scottUnion (fun z => iterateBot (g z) n) x := by
      rwa [← this]
    obtain <m, hm, hkm> := mem_scottUnion.mp this
    exact mem_scottUnion.mpr <m, hm, Set.mem_iUnion.mpr <n, hkm>>
  * intro hk
    obtain <m, hm, hkm> := mem_scottUnion.mp hk
    obtain <n, hkn> := Set.mem_iUnion.mp hkm
    exact Set.mem_iUnion.mpr <n,
      isScottContinuous_monotone (iterateBot_param_isScottContinuous hgx hgy n) hm hkn>

def Ymap (g : Pomega -> Pomega -> Pomega) : Pomega :=
  graph (fun x => fix (g x))

def Fofg (g : Pomega -> Pomega -> Pomega) (f : Pomega) : Pomega :=
  graph (fun x => g x (funOf f x))

theorem Ymap_app {g : Pomega -> Pomega -> Pomega}
  (hgx : forall y, IsScottContinuous (fun x => g x y))
  (hgy : forall x, IsScottContinuous (fun y => g x y)) (x : Pomega) :
  funOf (Ymap g) x = fix (g x) :=
  beta (fix_param_isScottContinuous hgx hgy) x

/-- **Scott 1976, (2.28).** `Y(fun f fun x. g(x)(f(x))) = fun x. Y(g(x))`. -/

```

```

theorem eq_2_28_commute {g : Pomega -> Pomega -> Pomega}
  (hgx : forall y, IsScottContinuous (fun x => g x y))
  (hgy : forall x, IsScottContinuous (fun y => g x y)) :
  fix (Fofg g) = Ymap g := by
have hF : IsScottContinuous (Fofg g) :=
  graph_const_isScottContinuous (fun f x => g x (funOf f x))
  (fun x => theorem_1_3 (hgy x) (funOf_isScottContinuous_left x))
have hfix : Fofg g (Ymap g) = Ymap g := by
  apply congrArg graph
  funext x
  rw [Ymap_app hgx hgy]
  exact (theorem_1_4 (hgy x)).1
have hle : fix (Fofg g) subseq Ymap g := (theorem_1_4 hF).2 (Ymap g) hfix
refine subset_antisymm hle ?_
have hiter : forall n x, funOf (iterateBot (Fofg g) n) x = iterateBot (g x) n := by
  intro n
  induction n with
  | zero =>
    intro x
    ext m
    simp [iterateBot, funOf, botElem]
  | succ n ih =>
    intro x
    have hcont : IsScottContinuous
      (fun z => g z (funOf (iterateBot (Fofg g) n) z)) :=
      theorem_1_3_tuple hgx hgy id_isScottContinuous
      (funOf_isScottContinuous (iterateBot (Fofg g) n))
    change funOf (lam (fun z => g z (funOf (iterateBot (Fofg g) n) z))) x =
      g x (iterateBot (g x) n)
    rw [beta hcont, ih]
  intro p hp
  rcases hp with <n, m, rfl, hm>
  obtain <k, hkm> := Set.mem_iUnion.mp hm
  cases k with
  | zero =>
    simp [iterateBot, botElem] at hkm
  | succ k =>
    have : pair n m in iterateBot (Fofg g) (k + 1) :=
      <n, m, rfl, by
        change m in g (e n) (funOf (iterateBot (Fofg g) k) (e n))
        rw [hiter]
        exact hkm>
    exact Set.mem_iUnion.mpr <k + 1, this>

/-- Closed term for `Y`. -/
def Yterm : Term :=
  .lam 0 (.app
    (.lam 1 (.app (.var 0) (.app (.var 1) (.var 1))))
    (.lam 1 (.app (.var 0) (.app (.var 1) (.var 1)))))

theorem Yterm_interp : interp Yterm (fun _ => botElem) = Ycomb := by
  simp [Yterm, interp, Ycomb, omegaComb, envSet, Function.update]

theorem Ycomb_combinatorial : IsCombinatorial Ycomb := by
  simpa [Yterm_interp] using theorem_2_4_closed Yterm

/-- **Scott 1976, (2.8) unfolding.** `Y(u) = u(Y(u))`. -/
theorem Ycomb_unfold (u : Pomega) :
  funOf Ycomb u = funOf u (funOf Ycomb u) := by
  calc
  funOf Ycomb u = funOf (omegaComb u) (omegaComb u) := Ycomb_app u
  _ = funOf u (funOf (omegaComb u) (omegaComb u)) :=
    omegaComb_app u (omegaComb u)

```

```

_ = funOf u (funOf Ycomb u) := by rw [Ycomb_app]

/-- Term-level shift `fun t. u(t+1)`, which agrees with `seqShift` on numerals. -/
def termShift (u : Pomega) : Pomega :=
  graph (fun t => funOf u (succSet t))

theorem termShift_isScottContinuous (u : Pomega) :
  IsScottContinuous (fun t => funOf u (succSet t)) :=
  theorem_1_3 (funOf_isScottContinuous u) succSet_isScottContinuous

theorem termShift_app (u t : Pomega) :
  funOf (termShift u) t = funOf u (succSet t) :=
  beta (termShift_isScottContinuous u) t

theorem termShift_ofNat (u : Pomega) (i : Nat) :
  funOf (termShift u) (ofNat i) = funOf u (ofNat (i + 1)) := by
  rw [termShift_app, succSet_ofNat]

theorem termShift_left_isScottContinuous : IsScottContinuous termShift :=
  graph_const_isScottContinuous (fun u t => funOf u (succSet t))
  (fun t => funOf_isScottContinuous_left (succSet t))

/-- Paper combinator for `$`: `fun s fun u fun z. z ? u(0), s(fun t. u(t+1))(z?1)`. -/
def dollarStepTerm : Term :=
  .lam 0 (.lam 1 (.lam 2
    (.cond (.var 2)
      (.app (.var 1) .zero)
      (.app (.app (.var 0) (.lam 3 (.app (.var 1) (.succ (.var 3))))))
      (.pred (.var 2))))))

def termDollarStepBody (s u z : Pomega) : Pomega :=
  condSet z (funOf u (ofNat 0))
  (funOf (funOf s (termShift u)) (predSet z))

def termDollarStep (s : Pomega) : Pomega :=
  graph (fun u => graph (fun z => termDollarStepBody s u z))

theorem seqFunLt_succ_term (u z : Pomega) (n : Nat) :
  condSet z (funOf u (ofNat 0)) (seqFunLt (termShift u) (predSet z) n) =
  seqFunLt u z (n + 1) := by
  ext k
  constructor
  * intro hk
    rcases hk with <hk0, h0z> | <hpos, t, ht>
    * exact (mem_seqFunLt).mpr <0, h0z, Nat.succ_pos n, hk0>
    * obtain <i, hi, hlt, hki> := (mem_seqFunLt).mp hpos
      refine (mem_seqFunLt).mpr <i + 1, hi, Nat.succ_lt_succ hlt, ?_>
      simpa [termShift_ofNat] using hki
  * intro hk
    obtain <i, hi, hlt, hki> := (mem_seqFunLt).mp hk
    cases i with
    | zero => exact Or.inl <hki, hi>
    | succ i =>
      refine Or.inr <?, i, hi>
      refine (mem_seqFunLt).mpr <i, hi, Nat.lt_of_succ_lt_succ hlt, ?_>
      simpa [termShift_ofNat] using hki

theorem termDollarStepBody_isScottContinuous_s (u z : Pomega) :
  IsScottContinuous (fun s => termDollarStepBody s u z) := by
  have hinner : IsScottContinuous
    (fun s => funOf (funOf s (termShift u)) (predSet z)) :=
    theorem_1_3 (f := fun w => funOf w (predSet z))
    (g := fun s => funOf s (termShift u))

```

```

      (funOf_isScottContinuous_left (predSet z))
      (funOf_isScottContinuous_left (termShift u))
    exact theorem_1_3 (condSet_isScottContinuous_right z (funOf u (ofNat 0))) hinner

theorem termDollarStepBody_isScottContinuous_u (s z : Pomega) :
  IsScottContinuous (fun u => termDollarStepBody s u z) := by
  have helse : IsScottContinuous
    (fun u => funOf (funOf s (termShift u)) (predSet z)) :=
    theorem_1_3 (f := fun w => funOf w (predSet z))
    (g := fun u => funOf s (termShift u))
    (funOf_isScottContinuous_left (predSet z))
    (theorem_1_3 (funOf_isScottContinuous s) termShift_left_isScottContinuous)
  exact theorem_1_3_tuple
    (fun y => condSet_isScottContinuous_mid z y)
    (fun x => condSet_isScottContinuous_right z x)
    (funOf_isScottContinuous_left (ofNat 0)) helse

theorem termDollarStepBody_isScottContinuous_z (s u : Pomega) :
  IsScottContinuous (fun z => termDollarStepBody s u z) :=
  theorem_1_3_tuple
    (fun y => condSet_isScottContinuous_left (funOf u (ofNat 0)) y)
    (fun z => condSet_isScottContinuous_right z (funOf u (ofNat 0)))
    id_isScottContinuous
    (theorem_1_3 (funOf_isScottContinuous (funOf s (termShift u)))
      predSet_isScottContinuous)

theorem termDollarStep_isScottContinuous : IsScottContinuous termDollarStep :=
  graph_const_isScottContinuous
    (fun s u => graph (fun z => termDollarStepBody s u z))
    (fun u => graph_const_isScottContinuous
      (fun s z => termDollarStepBody s u z)
      (fun z => termDollarStepBody_isScottContinuous_s u z))

theorem termDollarStep_app (s u : Pomega) :
  funOf (termDollarStep s) u = graph (fun z => termDollarStepBody s u z) :=
  beta (graph_const_isScottContinuous (fun u z => termDollarStepBody s u z)
    (fun z => termDollarStepBody_isScottContinuous_u s z)) u

theorem termDollarStep_app2 (s u z : Pomega) :
  funOf (funOf (termDollarStep s) u) z = termDollarStepBody s u z := by
  rw [termDollarStep_app]
  exact beta (termDollarStepBody_isScottContinuous_z s u) z

theorem termDollarStep_iterate (n : Nat) (u z : Pomega) :
  funOf (funOf (iterateBot termDollarStep n) u) z = seqFunLt u z n := by
  induction n generalizing u z with
  | zero =>
    simp [iterateBot, funOf_bot, seqFunLt_zero]
  | succ n ih =>
    rw [iterateBot, termDollarStep_app2, termDollarStepBody, ih, seqFunLt_succ_term]

theorem termDollarStep_fix_app (u z : Pomega) :
  funOf (funOf (fix termDollarStep) u) z = seqFun u z := by
  have : funOf (funOf (fix termDollarStep) u) z =
    ? n, funOf (funOf (iterateBot termDollarStep n) u) z := by
    simp [fix, funOf_iUnion]
  rw [this, seqFun_eq_iUnion_lt]
  ext k
  constructor
  * intro hk
    obtain <n, hn> := Set.mem_iUnion.mp hk
    exact Set.mem_iUnion.mpr <n, by simp [termDollarStep_iterate] using hn>
  * intro hk

```

```

obtain <n, hn> := Set.mem_iUnion.mp hk
exact Set.mem_iUnion.mpr <n, by simp [termDollarStep_iterate] using hn>

theorem dollarC_eq_fix_termDollarStep : dollarC = fix termDollarStep := by
  have hfix : termDollarStep (fix termDollarStep) = fix termDollarStep :=
    (theorem_1_4 termDollarStep_isScottContinuous).1
  have hbody : forall u z, termDollarStepBody (fix termDollarStep) u z = seqFun u z := by
    intro u z
    calc termDollarStepBody (fix termDollarStep) u z
      = funOf (funOf (termDollarStep (fix termDollarStep)) u) z :=
        (termDollarStep_app2 _ _ _).symm
    _ = funOf (funOf (fix termDollarStep) u) z := by rw [hfix]
    _ = seqFun u z := termDollarStep_fix_app u z
  have : termDollarStep (fix termDollarStep) =
    graph (fun u => graph (fun z => seqFun u z)) := by
    apply congrArg graph
    funext u
    apply congrArg graph
    funext z
    exact hbody u z
  exact this.symm.trans hfix

theorem dollarStepTerm_interp :
  interp dollarStepTerm (fun _ => botElem) = graph termDollarStep := by
  unfold dollarStepTerm termDollarStep termDollarStepBody termShift interp
  apply congrArg graph
  funext s
  simp only [envSet, Function.update_self, Function.update_of_ne (by decide : (1 : Nat) != 0)
    ,
    Function.update_of_ne (by decide : (2 : Nat) != 0),
    Function.update_of_ne (by decide : (3 : Nat) != 0),
    Function.update_of_ne (by decide : (2 : Nat) != 1),
    Function.update_of_ne (by decide : (3 : Nat) != 1),
    Function.update_of_ne (by decide : (3 : Nat) != 2)]
  apply congrArg graph
  funext u
  simp only [envSet, Function.update_self,
    Function.update_of_ne (by decide : (2 : Nat) != 1),
    Function.update_of_ne (by decide : (3 : Nat) != 1),
    Function.update_of_ne (by decide : (0 : Nat) != 1),
    Function.update_of_ne (by decide : (3 : Nat) != 2),
    Function.update_of_ne (by decide : (0 : Nat) != 2)]
  apply congrArg graph
  funext z
  simp [envSet, Function.update, condSet, succSet]
  rfl

theorem ofNat_combinatorial : forall n, IsCombinatorial (ofNat n)
| 0 => by
  simp [zeroC] using IsCombinatorial.zero
| n + 1 => by
  have h := IsCombinatorial.app IsCombinatorial.suc (ofNat_combinatorial n)
  simp [sucC_app, succSet_ofNat] using h

/-- **Scott 1976, (2.24).** `\$ is combinatory: \$ = Y(fun s fun u fun z. z ? u_0, s(fun t. u_{t
+1})(z?1))`. -/
theorem dollarC_combinatorial : IsCombinatorial dollarC := by
  have hY : funOf Ycomb (interp dollarStepTerm (fun _ => botElem)) = dollarC := by
    rw [dollarStepTerm_interp, theorem_2_5 termDollarStep_isScottContinuous,
      dollarC_eq_fix_termDollarStep]
  exact hY |> IsCombinatorial.app Ycomb_combinatorial (theorem_2_4_closed dollarStepTerm)

/-- Combinatorial primitive-recursion step `fun a fun f fun u fun n. n ? a, f(n?1)(u(n?1))`. -/

```



```

def primRecStepTerm : Term :=
  .lam 0 (.lam 1 (.lam 2 (.lam 3
    (.cond (.var 3) (.var 0)
      (.app (.app (.var 1) (.pred (.var 3)))
        (.app (.var 2) (.pred (.var 3)))))))

theorem primRecStepTerm_interp (a f u n : Pomega) :
  funOf (funOf (funOf (funOf (interp primRecStepTerm (fun _ => botElem)) a) f) u) n =
    condSet n a (funOf (funOf f (predSet n)) (funOf u (predSet n))) := by
  change funOf (funOf (funOf (funOf (interp (.lam 0 _) (fun _ => botElem)) a) f) u) n = _
  rw [theorem_2_2_beta]
  change funOf (funOf (funOf (interp (.lam 1 _) _) f) u) n = _
  rw [theorem_2_2_beta]
  change funOf (funOf (interp (.lam 2 _) _) u) n = _
  rw [theorem_2_2_beta]
  change funOf (interp (.lam 3 _) _) n = _
  rw [theorem_2_2_beta]
  simp [interp, envSet, Function.update]

theorem primRecStep_graph_of (a f : Pomega) :
  graph (primRecStep a f) =
    funOf (funOf (interp primRecStepTerm (fun _ => botElem)) a) f := by
  change graph (primRecStep a f) =
    funOf (funOf (interp (.lam 0 (.lam 1 (.lam 2 (.lam 3
      (.cond (.var 3) (.var 0)
        (.app (.app (.var 1) (.pred (.var 3)))
          (.app (.var 2) (.pred (.var 3))))))) (fun _ => botElem)) a) f
  rw [theorem_2_2_beta, theorem_2_2_beta]
  apply congrArg graph
  funext u
  apply congrArg graph
  funext n
  simp [primRecStep, interp, envSet, Function.update]

end Scott1976.DataTypesAsLattices

```

A.8 Scott1976/DataTypesAsLattices/Computability.lean

1664 lines.

Lean 4 source (lines 1–400)

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/
import Mathlib.Computability.RE
import Scott1976.DataTypesAsLattices.Lambda

/-!
# Scott 1976, S2 -- computability and the definability theorem

Theorem 2.6: for a continuous `f`, computability (the graph is r.e.) is
equivalent both to combinatory definability of its graph and to closed
LAMBDA-definability. The appendix proves the key converse
`IsRE u -> IsCombinatory u` by realizing primitive recursion and enumerating
an arbitrary r.e. set.
-/

set_option maxHeartbeats 2000000

namespace Scott1976.DataTypesAsLattices

```

```

/-- Recursively enumerable subsets of `?`, as elements of `P?`. -/
def IsRE (u : Pomega) : Prop :=
  REPred fun n : Nat => n in u

/-- **Scott 1976, S2, Definition.** A continuous `k`-ary map is computable
when membership in its values on finite arguments is r.e. Unary case: -/
def IsComputable (f : Pomega -> Pomega) : Prop :=
  IsScottContinuous f /\ IsRE (graph f)

/-- Closed LAMBDA-definable elements (empty environment). -/
def IsLambdaDefinable (u : Pomega) : Prop :=
  exists t : Term, interp t (fun _ => botElem) = u

/-- Combinatory elements are LAMBDA-definable (converse of Theorem 2.4). -/
theorem combinatory_isLambdaDefinable {u : Pomega} (hu : IsCombinatory u) :
  IsLambdaDefinable u := by
  induction hu with
  | zero => exact <.zero, rfl>
  | suc =>
    refine <.lam 0 (.succ (.var 0)), ?_>
    simp [interp, sucC, envSet, Function.update]
  | pred =>
    refine <.lam 0 (.pred (.var 0)), ?_>
    simp [interp, predC, envSet, Function.update]
  | cond =>
    refine <.lam 0 (.lam 1 (.lam 2
      (.cond (.var 2) (.var 0) (.var 1)))), ?_>
    simp [interp, condC, envSet, Function.update]
  | K =>
    refine <.lam 0 (.lam 1 (.var 0)), ?_>
    simp [interp, Kcomb, envSet, Function.update]
  | S =>
    refine <.lam 0 (.lam 1 (.lam 2
      (.app (.app (.var 0) (.var 2)) (.app (.var 1) (.var 2))))), ?_>
    simp [interp, Scomb, envSet, Function.update]
  | app _ _ iu iv =>
    obtain <t, ht> := iu
    obtain <s, hs> := iv
    exact <.app t s, by simp [interp, ht, hs]>

/-- LAMBDA-definable maps (in one free variable) are continuous, so
clause (iii) of Theorem 2.6 lands in the setting of (i)-(ii). -/
theorem theorem_2_6_lambda_continuous (t : Term) :
  IsScottContinuous (fun v => interp t (envSet (fun _ => botElem) 0 v)) :=
  theorem_2_1 t (fun _ => botElem) 0

/-- Combinatory elements are generated from the six constants, matching
the LAMBDA-definable closed terms of Theorem 2.4. -/
theorem theorem_2_6_combinatory_zero : IsLambdaDefinable zeroC :=
  <Term.zero, rfl>

theorem REPred.empty : REPred fun _ : Nat => False := by
  unfold REPred
  refine (Partrec.none (a := Nat) (sigma := Unit)).of_eq fun _ => ?_
  ext
  simp [Part.assert]

theorem REPred.true {a} [Primcodable a] : REPred fun _ : a => True := by
  unfold REPred
  refine (Decidable.Partrec.const' (Part.some ())).of_eq fun _ => ?_
  ext
  simp [Part.assert]

```

```

theorem REPred.comp {a b} [Primcodable a] [Primcodable b] {p : b -> Prop}
  (hp : REPred p) {f : a -> b} (hf : Computable f) :
  REPred fun a => p (f a) :=
  Partrec.comp hp hf

theorem REPred.and {a} [Primcodable a] {p q : a -> Prop}
  (hp : REPred p) (hq : REPred q) :
  REPred fun a => p a /\ q a := by
  refine (hp.bind (hq.comp Computable.fst).to_2).of_eq fun a => ?_
  ext
  simp [Part.bind_eq_bind, Part.assert]

theorem IsRE.bot : IsRE botElem :=
  REPred.empty.of_eq fun n => by simp [botElem]

theorem IsRE.top : IsRE topElem :=
  REPred.true.of_eq fun n => by simp [topElem]

/-- Named `numeral` so it does not shadow `ofNat`. -/
theorem IsRE.numeral (k : Nat) : IsRE (ofNat k) := by
  have : ComputablePred fun n : Nat => n = k :=
    <inferInstance, (Primrec.beq.comp Primrec.id (Primrec.const k)).to_comp>
  exact REPred.of_eq this.to_re fun n => by simp [ofNat]

theorem IsRE.zeroC : IsRE zeroC :=
  IsRE.numeral 0

/-- **Scott 1976, Theorem 2.6, r.e. direction for numerals.** -/
theorem theorem_2_6_ofNat_isRE (n : Nat) : IsCombinatory (ofNat n) -> IsRE (ofNat n) :=
  fun _ => IsRE.numeral n

theorem primrec_twoPow : Primrec fun k : Nat => 2 ^ k :=
  (Primrec.nat_rec' (f := id) (g := fun _ => (1 : Nat)))
  (h := fun (_ : Nat) (p : Nat x Nat) => p.2 * 2)
  Primrec.id (Primrec.const 1)
  (show Primrec fun q : Nat x Nat x Nat => q.2.2 * 2 from
    Primrec.nat_mul.comp (Primrec.snd.comp Primrec.snd) (Primrec.const 2)).of_eq
  fun k => by
    induction k with
    | zero => simp
    | succ k ih =>
      change (Nat.rec 1 (fun n IH => (n, IH).2 * 2) k) * 2 = 2 ^ (k + 1)
      have ih' : Nat.rec 1 (fun n IH => (n, IH).2 * 2) k = 2 ^ k := by
        simpa [id] using ih
      rw [ih', Nat.pow_succ, Nat.mul_comm]

theorem primrec_testBit : Primrec_2 fun n k : Nat => n.testBit k :=
  (Primrec.eq.decide.comp
    (Primrec.nat_mod.comp
      (Primrec.nat_div.comp Primrec.fst (primrec_twoPow.comp Primrec.snd))
      (Primrec.const 2))
    (Primrec.const 1)).of_eq fun p =>
    Nat.testBit_eq_decide_div_mod_eq.symm

theorem primrec_pair : Primrec_2 pair :=
  (Primrec.nat_add.comp
    (Primrec.nat_div.comp
      (Primrec.nat_mul.comp
        (Primrec.nat_add.comp Primrec.fst Primrec.snd)
        (Primrec.succ.comp (Primrec.nat_add.comp Primrec.fst Primrec.snd)))
      (Primrec.const 2))
    Primrec.snd).of_eq fun _ => rfl

```

```

theorem REPred.or {a} [Primcodable a] {p q : a -> Prop}
  (hp : REPred p) (hq : REPred q) :
  REPred fun a => p a \ / q a := by
  obtain <k, hk, H> := Partrec.merge' hp hq
  have hg : Computable_2 fun (_ : a) (_ : Unit) => () :=
    (Computable.const (a := a x Unit) ()).to_2
  refine Partrec.of_eq (hk.map hg) fun a => ?_
  ext
  constructor
  * intro hu
    rw [Part.mem_map_iff] at hu
    obtain <x, hx, hxu> := hu
    have hx' := (H a).1 x hx
    have hpq : p a \ / q a := by
      cases hx' with
      | inl h =>
        exact Or.inl (Part.mem_assert_iff.1 h).1
      | inr h =>
        exact Or.inr (Part.mem_assert_iff.1 h).1
    exact Part.mem_assert_iff.2 <hpq, Part.mem_some_iff.2 hxu.symm>
  * intro hu
    have hpq : p a \ / q a := (Part.mem_assert_iff.1 hu).1
    have hd : (k a).Dom := (H a).2.mpr <|
      hpq.imp (fun h => <h, trivial>) (fun h => <h, trivial>)
    rw [Part.mem_map_iff]
    exact <(), <hd, rfl>, (Part.mem_some_iff.1 (Part.mem_assert_iff.1 hu).2).symm>

theorem IsRE.union {u v : Pomega} (hu : IsRE u) (hv : IsRE v) : IsRE (u U v) :=
  REPred.of_eq (REPred.or hu hv) fun _ => Iff.rfl

theorem IsRE.ofFinset (s : Finset Nat) : IsRE (s : Set Nat) := by
  induction s using Finset.induction with
  | empty =>
    simpa [botElem] using IsRE.bot
  | insert k s _hk ih =>
    have h : (insert k s : Set Nat) = ofNat k U (s : Set Nat) := by
      ext; simp [ofNat]
    simpa [h] using IsRE.union (IsRE.numeral k) ih

/-- Finite `e j` is r.e. Named `of_e` so it does not shadow `e`. -/
theorem IsRE.of_e (j : Nat) : IsRE (e j) := by
  let s := (Finset.range (j + 1)).filter (fun k => j.testBit k)
  have hs : (s : Set Nat) = e j := by
    ext n
    constructor
  * intro hn
    simp [s, Finset.mem_filter] at hn
    exact mem_e.mpr hn.2
  * intro hn
    simp [s, Finset.mem_filter, Finset.mem_range, mem_e.mp hn,
      Nat.lt_succ_of_le (mem_e_le hn)]
  simpa [hs] using IsRE.ofFinset s

theorem IsRE.predSet {x : Pomega} (hx : IsRE x) : IsRE (predSet x) :=
  REPred.of_eq (hx.comp Primrec.succ.to_comp) fun _ => Iff.rfl

theorem IsRE.succSet {x : Pomega} (hx : IsRE x) : IsRE (succSet x) := by
  have heq0 : ComputablePred fun k : Nat => k = 0 :=
    <inferInstance, (Primrec.eq.decide.comp Primrec.id (Primrec.const 0)).to_comp>
  have hne : ComputablePred fun k : Nat => k != 0 := heq0.not
  have hand : REPred fun k : Nat => k != 0 /\ k.pred in x :=
    REPred.and hne.to_re (hx.comp Primrec.pred.to_comp)

```

```

exact _root_.REPred.of_eq hand (fun k =>
  <fun h => <k.pred, h.2, (Nat.succ_pred_eq_of_ne_zero h.1).symm>,
  fun h => by
    obtain <n, hn, hk> := h
    cases k with
    | zero => cases hk
    | succ k => exact <Nat.succ_ne_zero k, by cases hk; exact hn>>)

open Encodable
open Nat.Partrec (Code)
open Nat.Partrec.Code

/-- Projection of an r.e. binary predicate, by dovetailing `Code.evaln`. -/
theorem REPred.exists {p : Nat -> Nat -> Prop}
  (hp : REPred fun q : Nat x Nat => p q.1 q.2) :
  REPred fun n => exists m, p n m := by
  have hnata : Nat.Partrec fun k : Nat =>
    Part.bind (decode_2 (Nat x Nat) k) fun q : Nat x Nat =>
      (Part.assert (p q.1 q.2) fun _ => Part.some ())).map encode :=
  (Partrec.bind_decode_2_iff
    (f := fun q : Nat x Nat => Part.assert (p q.1 q.2) fun _ => Part.some ())).mp hp
  obtain <c, hc> := Code.exists_code.mp hnata
  have hfn : Computable_2 fun n k : Nat =>
    (evaln k.unpair.2 c (encode (n, k.unpair.1))).map fun _ : Nat => () := by
  refine (Primrec.option_map ?_ (Primrec.const ())).to_2.to_comp
  exact primrec_evaln.comp <|
    Primrec.pair
      (Primrec.pair (Primrec.snd.comp (Primrec.unpair.comp Primrec.snd))
        (Primrec.const c))
      (Primrec.encode.comp
        (Primrec.pair Primrec.fst
          (Primrec.fst.comp (Primrec.unpair.comp Primrec.snd))))
  have hr : REPred fun n =>
    (Nat.rfindOpt fun k =>
      (evaln k.unpair.2 c (encode (n, k.unpair.1))).map fun _ : Nat => ()).Dom :=
  Partrec.dom_re (Partrec.rfindOpt hfn)
  refine _root_.REPred.of_eq hr fun n => ?_
  constructor
  * intro hdom
  rw [Nat.rfindOpt_dom] at hdom
  obtain <k, u, hu> := hdom
  cases hopt : evaln k.unpair.2 c (encode (n, k.unpair.1)) with
  | none =>
    rw [hopt] at hu
    cases hu
  | some val =>
    have hin : val in evaln k.unpair.2 c (encode (n, k.unpair.1)) := by
      rw [hopt]; rfl
    have hsound : val in Code.eval c (encode (n, k.unpair.1)) :=
      evaln_sound hin
    rw [hc] at hsound
    rw [Part.mem_bind_iff] at hsound
    obtain <q, hq, hv> := hsound
    have hqe : decode_2 (Nat x Nat) (encode (n, k.unpair.1)) = some q := by
      simpa using hq
    have hq' : q = (n, k.unpair.1) :=
      Option.some_inj.mp (hq.symm.trans (decode_2_encode (n, k.unpair.1)))
    subst hq'
    rw [Part.mem_map_iff] at hv
    obtain <u, hu, _> := hv
    exact <k.unpair.1, (Part.mem_assert_iff.mp hu).1>
  * intro <m, hm>
  have hmem : encode () in Code.eval c (encode (n, m)) := by

```

```

    rw [hc, Part.mem_bind_iff]
    refine <(n, m), ?_, ?_>
    * change (n, m) in (decode_2 (Nat x Nat) (encode (n, m)) : Part (Nat x Nat))
      rw [decode_2_encode]
      exact Part.mem_some_iff.mpr rfl
    * rw [Part.mem_map_iff]
      exact <(), Part.mem_assert_iff.mpr <hm, Part.mem_some_iff.mpr rfl>, rfl>
  obtain <s, hs> := evaln_complete.mp hmem
  have hs' : evaln s c (Nat.pair n m) = some (encode ()) := hs
  refine (Nat.rfindOpt_dom (f := fun k =>
    (evaln k.unpair.2 c (encode (n, k.unpair.1))).map fun _ => ())).mpr
    <Nat.pair m s, (), ?_>
  simp [Nat.unpair_pair, hs']

theorem IsRE.pair_mem {u : Pomega} (hu : IsRE u) :
  REPred fun q : Nat x Nat => pair q.1 q.2 in u :=
  hu.comp primrec_pair.to_comp

theorem IsRE.hasZero {z : Pomega} (hz : IsRE z) : REPred fun _ : Nat => 0 in z :=
  hz.comp (Computable.const 0)

theorem IsRE.hasPos {z : Pomega} (hz : IsRE z) : REPred fun _ : Nat => exists k, k + 1 in z
:=
  _root_.REPred.of_eq
  (REPred.exists (p := fun _ k => k + 1 in z)
    (hz.comp (Primrec.succ.to_comp.comp Computable.snd)))
  fun _ => Iff.rfl

theorem IsRE.condSet {z x y : Pomega} (hz : IsRE z) (hx : IsRE x) (hy : IsRE y) :
  IsRE (condSet z x y) := by
  have hleft : REPred fun n => n in x /\ 0 in z :=
    REPred.and hx (IsRE.hasZero hz)
  have hright : REPred fun n => n in y /\ exists k, k + 1 in z :=
    REPred.and hy (IsRE.hasPos hz)
  exact _root_.REPred.of_eq (REPred.or hleft hright) fun n => Iff.rfl

theorem IsRE.dcondSet {z x y : Pomega} (hz : IsRE z) (hx : IsRE x) (hy : IsRE y) :
  IsRE (dcondSet z x y) :=
  IsRE.condSet hz (IsRE.condSet hz hx IsRE.top) (IsRE.condSet hz IsRE.top hy)

theorem primrecPred_bool {a} [Primcodable a] {f : a -> Bool} (hf : Primrec f) :
  PrimrecPred fun a => f a = true :=
  Primrec.eq.comp hf (Primrec.const true)

theorem primrecRel_testBit : PrimrecRel fun n k : Nat => n.testBit k = true :=
  primrecPred_bool (f := fun p : Nat x Nat => p.1.testBit p.2) primrec_testBit

theorem primrec_succ_sq : Primrec fun k : Nat => (k + 1) * (k + 1) :=
  Primrec.nat_mul.comp (Primrec.succ.comp Primrec.id) (Primrec.succ.comp Primrec.id)

/-- Common-stage certificate: a finite family of r.e. facts all halt at one `evaln` bound. -/
theorem primrecPred_common_stage (c : Code) :
  PrimrecPred fun p : Nat x Nat =>
    forall k < p.1, p.1.testBit k = false /\ (evaln p.2 c k).isSome = true := by
  have heval : Primrec fun q : Nat x Nat => evaln q.2 c q.1 :=
    primrec_evaln.comp <|
  have hR : PrimrecRel fun k q : Nat =>
    q.unpair.1.testBit k = false /\ (evaln q.unpair.2 c k).isSome = true :=
    ((primrecPred_bool
      (Primrec_2.comp primrec_testBit
        (Primrec.fst.comp (Primrec.unpair.comp Primrec.snd)) Primrec.fst)).not.or
      (primrecPred_bool (Primrec.option_isSome.comp

```

```

    (primrec_evaln.comp <|
      Primrec.pair
        (Primrec.pair
          (Primrec.snd.comp (Primrec.unpair.comp Primrec.snd))
          (Primrec.const c))
        Primrec.fst))))).of_eq fun p => by
    simp [Bool.not_eq_true]
  refine (hR.forall_lt.comp Primrec.fst
    (Primrec_2.natPair.comp Primrec.fst Primrec.snd)).of_eq fun p => ?_
  simp [Nat.unpair_pair]

theorem eSubset_iff_stage {x : Pomega} {c : Code}
  (hc : Code.eval c = fun k => Part.assert (k in x) fun _ => Part.some (0 : Nat))
  (n : Nat) :
  e n subseq x <-> exists s, forall k < n, n.testBit k = false \ / (evaln s c k).
  isSome = true := by
  constructor
  * intro hsub
    let stage : Nat -> Nat := fun k =>
      if h : n.testBit k = true then
        ((evaln_complete (x := 0)).1 (by
          rw [hc]
          exact Part.mem_assert_iff.mpr <hsub (mem_e.mpr h), Part.mem_some_iff.mpr rfl>)).
        choose
        else 0
    refine <(Finset.range n).sup stage, fun k hlt => ?_>
    by_cases hb : n.testBit k = true
    * refine Or.inr ?_
      have hle : stage k <= (Finset.range n).sup stage :=
        Finset.le_sup (Finset.mem_range.mpr hlt)
      have h0 : 0 in evaln (stage k) c k := by
        simp only [stage, hb, reduceDite]
      exact ((evaln_complete (x := 0)).1 (by
        rw [hc]
        exact Part.mem_assert_iff.mpr <hsub (mem_e.mpr hb), Part.mem_some_iff.mpr rfl>)).
      choose_spec
      exact (Option.isSome_of_mem (evaln_mono hle h0))
    * exact Or.inl (Bool.eq_false_iff.mpr hb)
  * intro <s, hs> k hk
    have hlt : k < n := mem_e_lt hk
    have hsome : (evaln s c k).isSome = true :=
      (hs k hlt).resolve_left fun hfals => Bool.eq_false_iff.mpr hfals (mem_e.mp hk)
    obtain <val, hval> := Option.isSome_iff_exists.mpr hsome
    have : val in Code.eval c k :=
      evaln_sound (by simp [Option.mem_def] using hval)
    have : val in (Part.assert (k in x) fun _ => Part.some (0 : Nat)) := by
      simp [hc] using this
    exact (Part.mem_assert_iff.mpr this).1

/-- Finite inclusion `e n subseq x` is r.e. in `n` when `x` is, via one common `evaln`
stage. -/
theorem IsRE.eSubset {x : Pomega} (hx : IsRE x) :
  REPred fun n => e n subseq x := by
  have hf : Partrec fun k : Nat =>
    (Part.assert (k in x) fun _ => Part.some (0 : Nat)) :=
    hx.map (Computable.const (0 : Nat)).to_2
  obtain <c, hc> := Code.exists_code.1 (Partrec.nat_iff.1 hf)
  have hex : REPred fun n =>
    exists s, forall k < n, n.testBit k = false \ / (evaln s c k).isSome = true :=
    REPred.exists (p := fun n s =>
      forall k < n, n.testBit k = false \ / (evaln s c k).isSome = true)
    (primrecPred_common_stage c).computablePred.to_re
  exact hex.of_eq fun n => (eSubset_iff_stage hc n).symm

```

```

/-- **Scott 1976, Appendix.** Application of r.e. elements is r.e. -/
theorem IsRE.funOf {u x : Pomega} (hu : IsRE u) (hx : IsRE x) : IsRE (u ? x) := by
  have hand : REPred fun q : Nat x Nat => e q.1 subseq x /\ pair q.1 q.2 in u :=
    REPred.and ((IsRE.eSubseq hx).comp Computable.fst) (IsRE.pair_mem hu)
  have hex : REPred fun m => exists n, e n subseq x /\ pair n m in u :=

```

Lean 4 source (lines 401–800)

```

  REPred.exists (p := fun m n => e n subseq x /\ pair n m in u)
    (hand.comp (Primrec.pair Primrec.snd Primrec.fst).to_comp)
  exact hex.of_eq fun _ => Iff.rfl

theorem primrecPred_eq_scott_pair :
  PrimrecPred fun t : Nat x Nat x Nat => t.1 = pair t.2.1 t.2.2 :=
  Primrec.eq.comp Primrec.fst
  (primrec_pair.comp (Primrec.fst.comp Primrec.snd) (Primrec.snd.comp Primrec.snd))

/-- Encode a Scott-pair graph clause as a single `Nat.pair` search index. -/
theorem IsRE.graph_of_primrecRel {f : Pomega -> Pomega}
  (hP : PrimrecRel fun n m : Nat => m in f (e n)) :
  IsRE (graph f) := by
  have hinner : PrimrecPred fun q : Nat x Nat =>
    q.1 = pair (Nat.unpair q.2).1 (Nat.unpair q.2).2 /\
    (Nat.unpair q.2).2 in f (e (Nat.unpair q.2).1) :=
    (primrecPred_eq_scott_pair.comp
      (Primrec.pair Primrec.fst (Primrec.unpair.comp Primrec.snd))).and
    (hP.comp
      (Primrec.fst.comp (Primrec.unpair.comp Primrec.snd))
      (Primrec.snd.comp (Primrec.unpair.comp Primrec.snd)))
  have hex : REPred fun p =>
    exists t, p = pair (Nat.unpair t).1 (Nat.unpair t).2 /\
    (Nat.unpair t).2 in f (e (Nat.unpair t).1) :=
    REPred.exists (p := fun p t =>
      p = pair (Nat.unpair t).1 (Nat.unpair t).2 /\
      (Nat.unpair t).2 in f (e (Nat.unpair t).1))
      hinner.computablePred.to_re
  refine hex.of_eq fun p => ?_
  constructor
  * intro <t, ht, hm>
    exact <(Nat.unpair t).1, (Nat.unpair t).2, ht, hm>
  * intro <n, m, hm, hmem>
    refine <Nat.pair n m, ?, ?>
    * simp [Nat.unpair_pair] using hm
    * simp [Nat.unpair_pair] using hmem

theorem IsRE.sucC : IsRE sucC := by
  have hp : PrimrecRel fun n m : Nat => m != 0 /\ n.testBit m.pred = true :=
    (PrimrecPred.not (Primrec.eq.comp Primrec.snd (Primrec.const 0))).and
    (primrecPred_bool
      (Primrec_2.comp primrec_testBit Primrec.fst (Primrec.pred.comp Primrec.snd)))
  refine (IsRE.graph_of_primrecRel (f := DataTypesAsLattices.succSet)
    (hp.of_eq fun n m => ?_)).of_eq ?_
  * constructor
  * intro <hm0, hbit>
    exact <m.pred, mem_e.mpr hbit, (Nat.succ_pred_eq_of_ne_zero hm0).symm>
  * intro <k, hk, hm>
    subst hm
    exact <Nat.succ_ne_zero k, mem_e.mp hk>
  * intro p; rfl

theorem IsRE.predC : IsRE predC := by
  have hp : PrimrecRel fun n m : Nat => n.testBit (m + 1) = true :=
    primrecPred_bool (Primrec_2.comp primrec_testBit Primrec.fst (Primrec.succ.comp Primrec.snd)

```



```

))
refine (IsRE.graph_of_primrecRel (f := DataTypesAsLattices.predSet)
  (hp.of_eq fun n m => ?_)).of_eq ?_
* constructor
* intro h; exact mem_e.mpr h
* intro h; exact mem_e.mp h
* intro p; rfl

theorem eSubset_e_iff (n b : Nat) :
  e n subseq e b <-> forall k < n, n.testBit k = false /\ b.testBit k = true := by
  constructor
* intro h k hk
  by_cases hb : n.testBit k = true
* exact Or.inr (mem_e.mp (h (mem_e.mpr hb)))
* exact Or.inl (Bool.eq_false_iff.mpr hb)
* intro h k hk
  have hlt : k < n := mem_e.lt hk
  exact mem_e.mpr ((h k hlt).resolve_left fun hf =>
    Bool.eq_false_iff.mp hf (mem_e.mp hk))

theorem primrecRel_eSubset : PrimrecRel fun n b : Nat => e n subseq e b := by
  have hR : PrimrecRel fun k q : Nat =>
    q.unpair.1.testBit k = false /\ q.unpair.2.testBit k = true :=
    ((primrecPred_bool
      (Primrec_2.comp primrec_testBit
        (Primrec.fst.comp (Primrec.unpair.comp Primrec.snd)) Primrec.fst)).not.or
      (primrecPred_bool
        (Primrec_2.comp primrec_testBit
          (Primrec.snd.comp (Primrec.unpair.comp Primrec.snd)) Primrec.fst))).of_eq
      fun _ => by simp [Bool.not_eq_true]
  refine (hR.forall_lt.comp Primrec.fst
    (Primrec_2.natPair.comp Primrec.fst Primrec.snd)).of_eq fun p => ?_
  simpa [Nat.unpair_pair] using (eSubset_e_iff p.1 p.2).symm

theorem lt_two_pow_of_high_bits {n k : Nat}
  (h : forall j, k <= j -> n.testBit j = false) : n < 2 ^ k := by
  induction n using Nat.binaryRec generalizing k with
  | zero => simp
  | bit b n ih =>
    cases k with
  | zero =>
    have hb : b = false := by
      simpa [Nat.testBit_bit_zero] using h 0 le_rfl
    have hn0 : n = 0 := Nat.zero_of_testBit_eq_false fun j => by
      simpa [Nat.testBit_bit_succ] using h (j + 1) (Nat.zero_le (j + 1))
    simp [hb, hn0]
  | succ k =>
    have : n < 2 ^ k := ih fun j hj => by
      simpa [Nat.testBit_bit_succ] using h (j + 1) (Nat.succ_le_succ hj)
    exact Nat.bit_lt_two_pow_succ_iff.mpr this

theorem bits_subset_lt_two_pow {n b : Nat} (h : e n subseq e b) : n < 2 ^ (b + 1) :=
  lt_two_pow_of_high_bits fun j hj =>
  Bool.eq_false_iff.2 fun hbit =>
  Nat.not_le.mpr hj (mem_e.le (h (mem_e.mpr hbit)))

theorem mem_funOf_e_iff (a b m : Nat) :
  m in funOf (e a) (e b) <->
  exists n < 2 ^ (b + 1), e n subseq e b /\ a.testBit (pair n m) := by
  constructor
* intro <n, hn, hp>
  exact <n, bits_subset_lt_two_pow hn, hn, mem_e.mp hp>
* intro <n, _, hn, hbit>

```

```

exact <n, hn, mem_e.mpr hbit>

theorem pos_bit_iff (n : Nat) :
  (exists k, n.testBit (k + 1) = true) <-> 2 <= n := by
  constructor
  * intro <k, hk>
    exact (Nat.pow_le_pow_right (by decide : 0 < (2 : Nat))
      (Nat.le_add_left 1 k) : (2 : Nat) ^ 1 <= 2 ^ (k + 1)).trans
      (two_pow_le_of_testBit hk)
  * intro hn
    by_contra hex
    push_neg at hex
    have hlt : n < 2 := lt_two_pow_of_high_bits fun j hj => by
      cases j with
      | zero => exact (Nat.not_succ_le_zero 0 hj).elim
      | succ j => exact Bool.eq_false_iff.2 (hex j)
    exact Nat.not_lt.mpr hn hlt

theorem condSet_e_iff (n0 n1 n2 m : Nat) :
  m in condSet (e n2) (e n0) (e n1) <->
    (n0.testBit m = true /\ n2.testBit 0 = true) /\
    (n1.testBit m = true /\ 2 <= n2) := by
  constructor
  * intro h
    rcases h with <hm, h0> | <hm, <k, hk>>
    * exact Or.inl <mem_e.mp hm, mem_e.mp h0>
    * exact Or.inr <mem_e.mp hm, (pos_bit_iff n2).1 <k, mem_e.mp hk>>
  * intro h
    rcases h with <hm, h0> | <hm, hn2>
    * exact Or.inl <mem_e.mpr hm, mem_e.mpr h0>
    * obtain <k, hk> := (pos_bit_iff n2).2 hn2
      exact Or.inr <mem_e.mpr hm, k, mem_e.mpr hk>

theorem IsRE.graph_of_re {f : Pomega -> Pomega}
  (h : REPred fun q : Nat x Nat => q.2 in f (e q.1)) :
  IsRE (graph f) := by
  have heq : PrimrecPred fun q : Nat x Nat =>
    q.1 = pair (Nat.unpair q.2).1 (Nat.unpair q.2).2 :=
    primrecPred_eq_scott_pair.comp
    (Primrec.pair Primrec.fst (Primrec.unpair.comp Primrec.snd))
  have hmem : REPred fun q : Nat x Nat =>
    (Nat.unpair q.2).2 in f (e (Nat.unpair q.2).1) :=
    h.comp (Primrec.pair
      (Primrec.fst.comp (Primrec.unpair.comp Primrec.snd))
      (Primrec.snd.comp (Primrec.unpair.comp Primrec.snd))).to_comp
  have hex : REPred fun p =>
    exists t, p = pair (Nat.unpair t).1 (Nat.unpair t).2 /\
      (Nat.unpair t).2 in f (e (Nat.unpair t).1) :=
    REPred.exists (REPred.and heq.computablePred.to_re hmem)
  refine hex.of_eq fun p => ?_
  constructor
  * intro <t, ht, hm>
    exact <(Nat.unpair t).1, (Nat.unpair t).2, ht, hm>
  * intro <n, m, hm, hmem'>
    refine <Nat.pair n m, ?_, ?_>
    * simpa [Nat.unpair_pair] using hm
    * simpa [Nat.unpair_pair] using hmem'

theorem mem_graph_const_iff (n m : Nat) :
  m in graph (fun _ => e n) <->
    exists t, m = pair (Nat.unpair t).1 (Nat.unpair t).2 /\
      n.testBit (Nat.unpair t).2 = true := by
  constructor

```



```

      (Primrec.snd.comp (Primrec.unpair.comp Primrec.snd)))))))))
have hbit0 : PrimrecPred fun q : Nat x Nat =>
  (Nat.unpair q.2).1.testBit
    (Nat.unpair (Nat.unpair (Nat.unpair q.2).2).2).2 = true /\
    (Nat.unpair (Nat.unpair (Nat.unpair q.2).2).2).1.testBit 0 = true :=
  (primrecPred_bool (Primrec_2.comp primrec_testBit
    (Primrec.fst.comp (Primrec.unpair.comp Primrec.snd))
    (Primrec.snd.comp (Primrec.unpair.comp
      (Primrec.snd.comp (Primrec.unpair.comp
        (Primrec.snd.comp (Primrec.unpair.comp Primrec.snd)))))))).and
    (primrecPred_bool (Primrec_2.comp primrec_testBit
      (Primrec.fst.comp (Primrec.unpair.comp
        (Primrec.snd.comp (Primrec.unpair.comp
          (Primrec.snd.comp (Primrec.unpair.comp Primrec.snd))))))
        (Primrec.const 0)))
have hbit1 : PrimrecPred fun q : Nat x Nat =>
  (Nat.unpair (Nat.unpair q.2).2).1.testBit
    (Nat.unpair (Nat.unpair (Nat.unpair q.2).2).2).2 = true /\
    2 <= (Nat.unpair (Nat.unpair (Nat.unpair q.2).2).2).1 :=
  (primrecPred_bool (Primrec_2.comp primrec_testBit
    (Primrec.fst.comp (Primrec.unpair.comp
      (Primrec.snd.comp (Primrec.unpair.comp Primrec.snd))))
    (Primrec.snd.comp (Primrec.unpair.comp
      (Primrec.snd.comp (Primrec.unpair.comp
        (Primrec.snd.comp (Primrec.unpair.comp
          (Primrec.snd.comp (Primrec.unpair.comp Primrec.snd)))))))).and
    (Primrec.nat_le.comp (Primrec.const 2)
      (Primrec.fst.comp (Primrec.unpair.comp
        (Primrec.snd.comp (Primrec.unpair.comp
          (Primrec.snd.comp (Primrec.unpair.comp Primrec.snd))))))
have hinner : PrimrecPred fun q : Nat x Nat =>
  q.1 = pair (Nat.unpair q.2).1
    (pair (Nat.unpair (Nat.unpair q.2).2).1
      (pair (Nat.unpair (Nat.unpair (Nat.unpair q.2).2).2).1
        (Nat.unpair (Nat.unpair (Nat.unpair q.2).2).2)) /\
        (((Nat.unpair q.2).1.testBit
          (Nat.unpair (Nat.unpair (Nat.unpair q.2).2).2).2 = true /\
          (Nat.unpair (Nat.unpair (Nat.unpair q.2).2).2).1.testBit 0 =
            true) \/\
          ((Nat.unpair (Nat.unpair q.2).2).1.testBit
            (Nat.unpair (Nat.unpair (Nat.unpair q.2).2).2).2 = true /\
            2 <= (Nat.unpair (Nat.unpair (Nat.unpair q.2).2).2).1)) :=
        heq.and (hbit0.or hbit1)
have hex : REPred fun p =>
  exists t, p = pair (Nat.unpair t).1
    (pair (Nat.unpair (Nat.unpair t).2).1
      (pair (Nat.unpair (Nat.unpair (Nat.unpair t).2).2).1
        (Nat.unpair (Nat.unpair (Nat.unpair t).2).2)) /\
        (((Nat.unpair t).1.testBit
          (Nat.unpair (Nat.unpair (Nat.unpair t).2).2).2 = true /\
          (Nat.unpair (Nat.unpair (Nat.unpair t).2).2).1.testBit 0 =
            true) \/\
          ((Nat.unpair (Nat.unpair t).2).1.testBit
            (Nat.unpair (Nat.unpair (Nat.unpair t).2).2).2 = true /\
            2 <= (Nat.unpair (Nat.unpair (Nat.unpair t).2).2).1)) :=
        REPred.exists hinner.computablePred.to_re
  refine hex.of_eq fun p => ?_
constructor
* intro <t, ht, hm>
  exact (mem_condC_iff p).mpr
  <(Nat.unpair t).1, (Nat.unpair (Nat.unpair t).2).1,
    (Nat.unpair (Nat.unpair (Nat.unpair t).2).2).1,
    (Nat.unpair (Nat.unpair (Nat.unpair t).2).2).2, ht, hm>
* intro hp

```

```

    obtain <n0, n1, n2, m, ht, hm> := (mem_condC_iff p).mp hp
    refine <Nat.pair n0 (Nat.pair n1 (Nat.pair n2 m)), ?_, ?_>
    * simp [Nat.unpair_pair] using ht
    * simp [Nat.unpair_pair] using hm

theorem primrecRel_mem_funOf_e :
  PrimrecRel fun q m : Nat =>
    m in e (Nat.unpair q).1 ? e (Nat.unpair q).2 := by
  have hinner : PrimrecRel fun n packed : Nat =>
    e n subseq e (Nat.unpair (Nat.unpair packed).1).2 /\
      (Nat.unpair (Nat.unpair packed).1).1.testBit
        (pair n (Nat.unpair packed).2) :=
    ((primrecRel_eSubset.comp Primrec.fst
      (Primrec.snd.comp (Primrec.unpair.comp
        (Primrec.fst.comp (Primrec.unpair.comp Primrec.snd))))).and
      (primrecPred_bool (Primrec_2.comp primrec_testBit
        (Primrec.fst.comp (Primrec.unpair.comp
          (Primrec.fst.comp (Primrec.unpair.comp Primrec.snd))))
        (primrec_pair.comp Primrec.fst
          (Primrec.snd.comp (Primrec.unpair.comp Primrec.snd))))))
  refine (hinner.exists_lt.comp
    (primrec_twoPow.comp (Primrec.succ.comp
      (Primrec.snd.comp (Primrec.unpair.comp Primrec.fst))))
    (Primrec_2.natPair.comp Primrec.fst Primrec.snd)).of_eq
  fun q => ?_
  simp only [Nat.unpair_pair]
  exact (mem_funOf_e_iff q.1.unpair.1 q.1.unpair.2 q.2).symm

theorem eSubset_funOf_e_iff (k a b : Nat) :
  e k subseq e a ? e b <->
    forall i < k, k.testBit i = false \ / i in e a ? e b := by
  constructor
  * intro h i hi
    by_cases hb : k.testBit i = true
    * exact Or.inr (h (mem_e.mpr hb))
    * exact Or.inl (Bool.eq_false_iff.mpr hb)
  * intro h i hi
    have hlt : i < k := mem_e_lt hi
    exact (h i hlt).resolve_left fun hf =>
      Bool.eq_false_iff.mpr hf (mem_e.mpr hi)

theorem primrecRel_eSubset_funOf_e_bit :
  PrimrecRel fun i kq : Nat =>
    (Nat.unpair kq).1.testBit i = false \ /
      i in e (Nat.unpair (Nat.unpair kq).2).1 ?
        e (Nat.unpair (Nat.unpair kq).2).2 :=
    ((primrecPred_bool (Primrec_2.comp primrec_testBit
      (Primrec.fst.comp (Primrec.unpair.comp Primrec.snd))
      Primrec.fst)).not.or
      (primrecRel_mem_funOf_e.comp
        (Primrec.snd.comp (Primrec.unpair.comp Primrec.snd))
        Primrec.fst)).of_eq fun p => by
      simp [Bool.not_eq_true]

theorem primrecRel_eSubset_funOf_e :
  PrimrecRel fun k q : Nat =>
    e k subseq e (Nat.unpair q).1 ? e (Nat.unpair q).2 := by
  refine (primrecRel_eSubset_funOf_e_bit.forall_lt.comp Primrec.fst
    (Primrec_2.natPair.comp Primrec.fst Primrec.snd)).of_eq fun p => ?_
  simp only [Nat.unpair_pair]
  exact (eSubset_funOf_e_iff p.1 p.2.unpair.1 p.2.unpair.2).symm

def pack4 (n0 n1 n2 m : Nat) : Nat :=

```

```

    Nat.pair n0 (Nat.pair n1 (Nat.pair n2 m))

def pack4_proj1 (t : Nat) : Nat := (Nat.unpair t).1
def pack4_proj2 (t : Nat) : Nat := (Nat.unpair (Nat.unpair t).2).1
def pack4_proj3 (t : Nat) : Nat := (Nat.unpair (Nat.unpair (Nat.unpair t).2).2).1
def pack4_proj4 (t : Nat) : Nat := (Nat.unpair (Nat.unpair (Nat.unpair t).2).2).2

theorem primrec_pack4_proj1 : Primrec pack4_proj1 :=
  Primrec.fst.comp Primrec.unpair

theorem primrec_pack4_proj2 : Primrec pack4_proj2 :=
  Primrec.fst.comp (Primrec.unpair.comp (Primrec.snd.comp Primrec.unpair))

theorem primrec_pack4_proj3 : Primrec pack4_proj3 :=
  Primrec.fst.comp (Primrec.unpair.comp
    (Primrec.snd.comp (Primrec.unpair.comp (Primrec.snd.comp Primrec.unpair))))

theorem primrec_pack4_proj4 : Primrec pack4_proj4 :=
  Primrec.snd.comp (Primrec.unpair.comp
    (Primrec.snd.comp (Primrec.unpair.comp (Primrec.snd.comp Primrec.unpair))))

theorem mem_Scomb_iff (p : Nat) :
  p in Scomb <->
    exists n0 n1 n2 m, p = pair n0 (pair n1 (pair n2 m)) /\
      m in (e n0 ? e n2) ? (e n1 ? e n2) := by
  constructor
* intro <n0, p1, hp, hp1>
  obtain <n1, p2, hp1', hp2> := hp1
  obtain <n2, m, hp2', hm> := hp2
  exact <n0, n1, n2, m, by simp [hp, hp1', hp2'], hm>
* intro <n0, n1, n2, m, hp, hm>

Lean 4 source (lines 801–1200)

  exact <n0, pair n1 (pair n2 m), hp,
    <n1, pair n2 m, rfl, <n2, m, rfl, hm>>>

theorem primrecRel_Scomb_bit :
  PrimrecRel fun i kt : Nat =>
    (Nat.unpair kt).1.testBit i = false /\
      i in e (pack4_proj2 (Nat.unpair kt).2) ?
        e (pack4_proj3 (Nat.unpair kt).2) :=
    ((primrecPred_bool (Primrec_2.comp primrec_testBit
      (Primrec.fst.comp (Primrec.unpair.comp Primrec.snd))
      Primrec.fst)).not.or
      (primrecRel_mem_fun0f_e.comp
        (Primrec_2.natPair.comp
          (primrec_pack4_proj2.comp (Primrec.snd.comp (Primrec.unpair.comp Primrec.snd)))
          (primrec_pack4_proj3.comp (Primrec.snd.comp (Primrec.unpair.comp Primrec.snd))))
      Primrec.fst)).of_eq fun p => by simp [Bool.not_eq_true]

attribute [irreducible] pack4_proj1 pack4_proj2 pack4_proj3 pack4_proj4

theorem primrecPred_Scomb_subset :
  PrimrecPred fun p : Nat x Nat =>
    forall i < p.1, p.1.testBit i = false /\
      i in e (pack4_proj2 p.2) ? e (pack4_proj3 p.2) :=
    (primrecRel_Scomb_bit.forall_lt.comp Primrec.fst
      (Primrec_2.natPair.comp Primrec.fst Primrec.snd)).of_eq fun p => by
      simp [Nat.unpair_pair]

theorem primrecRel_Scomb_app :
  PrimrecRel fun k t : Nat =>
    e k subseteq e (pack4_proj2 t) ? e (pack4_proj3 t) /\

```

```

    pair k (pack4_proj4 t) in e (pack4_proj1 t) ? e (pack4_proj3 t) := by
have hmem : PrimrecPred fun p : Nat x Nat =>
    pair p.1 (pack4_proj4 p.2) in
    e (pack4_proj1 p.2) ? e (pack4_proj3 p.2) :=
    (primrecRel_mem_fun0f_e.comp
    (Primrec_2.natPair.comp (primrec_pack4_proj1.comp Primrec.snd)
    (primrec_pack4_proj3.comp Primrec.snd))
    (primrec_pair.comp Primrec.fst (primrec_pack4_proj4.comp Primrec.snd))).of_eq
    fun p => by simp [Nat.unpair_pair]
refine (primrecPred_Scomb_subset.and hmem).of_eq fun p => ?_
constructor
* intro <hs, hm>
    exact <(eSubset_fun0f_e_iff _ _ _).mpr hs, hm>
* intro <hs, hm>
    exact <(eSubset_fun0f_e_iff _ _ _).mp hs, hm>

theorem rePred_Scomb_nested :
    REPred fun t : Nat =>
    pack4_proj4 t in
    (e (pack4_proj1 t) ? e (pack4_proj3 t)) ?
    (e (pack4_proj2 t) ? e (pack4_proj3 t)) :=
    (REPred.exists (p := fun t k =>
    e k subseteq e (pack4_proj2 t) ? e (pack4_proj3 t) /\
    pair k (pack4_proj4 t) in e (pack4_proj1 t) ? e (pack4_proj3 t))
    (primrecRel_Scomb_app.swap.computablePred.to_re)).of_eq fun _ => Iff.rfl

theorem primrecPred_Scomb_eq :
    PrimrecPred fun q : Nat x Nat =>
    q.1 = pair (pack4_proj1 q.2)
    (pair (pack4_proj2 q.2)
    (pair (pack4_proj3 q.2) (pack4_proj4 q.2))) :=
    Primrec.eq.comp Primrec.fst
    (primrec_pair.comp (primrec_pack4_proj1.comp Primrec.snd)
    (primrec_pair.comp (primrec_pack4_proj2.comp Primrec.snd)
    (primrec_pair.comp (primrec_pack4_proj3.comp Primrec.snd)
    (primrec_pack4_proj4.comp Primrec.snd))))

theorem IsRE.Scomb : IsRE Scomb := by
    have hmem : REPred fun q : Nat x Nat =>
    pack4_proj4 q.2 in
    (e (pack4_proj1 q.2) ? e (pack4_proj3 q.2)) ?
    (e (pack4_proj2 q.2) ? e (pack4_proj3 q.2)) :=
    rePred_Scomb_nested.comp Primrec.snd.to_comp
    have hex : REPred fun p =>
    exists t, p = pair (pack4_proj1 t)
    (pair (pack4_proj2 t) (pair (pack4_proj3 t) (pack4_proj4 t))) /\
    pack4_proj4 t in
    (e (pack4_proj1 t) ? e (pack4_proj3 t)) ?
    (e (pack4_proj2 t) ? e (pack4_proj3 t)) :=
    REPred.exists (REPred.and primrecPred_Scomb_eq.computablePred.to_re hmem)
    refine hex.of_eq fun p => ?_
    constructor
    * intro <t, ht, hm>
    exact (mem_Scomb_iff p).mpr
    <pack4_proj1 t, pack4_proj2 t, pack4_proj3 t, pack4_proj4 t, ht, hm>
    * intro hp
    obtain <n0, n1, n2, m, ht, hm> := (mem_Scomb_iff p).mp hp
    refine <pack4 n0 n1 n2 m, ?, ?>
    * simp [pack4, pack4_proj1, pack4_proj2, pack4_proj3, pack4_proj4,
    Nat.unpair_pair] using ht
    * simp [pack4, pack4_proj1, pack4_proj2, pack4_proj3, pack4_proj4,
    Nat.unpair_pair] using hm

```

```

/-- Combinatory elements are r.e. (one direction of the appendix equivalence). -/
theorem combinatory_isRE {u : Pomega} (hu : IsCombinatory u) : IsRE u := by
  induction hu with
  | zero => exact IsRE.zeroC
  | suc => exact IsRE.sucC
  | pred => exact IsRE.predC
  | cond => exact IsRE.condC
  | K => exact IsRE.Kcomb
  | S => exact IsRE.Scomb
  | app _ _ iu iv => exact IsRE.funOf iu iv

/-- **Scott 1976, (2.16).** Combinator for `fun x. 0 U (x+1)`. -/
def topRecTerm : Term :=
  .lam 0 (.cond (.lam 1 .zero) .zero (.succ (.var 0)))

theorem topRecTerm_interp :
  interp topRecTerm (fun _ => botElem) = graph topRec := by
  apply congrArg graph
  funext v
  simp [topRecTerm, topRec, interp, envSet, Function.update, eq_2_15]

theorem topElem_combinatory : IsCombinatory topElem := by
  have h : funOf Ycomb (interp topRecTerm (fun _ => botElem)) = topElem := by
    rw [topRecTerm_interp, theorem_2_5 topRec_isScottContinuous, eq_2_16]
  exact h |> IsCombinatory.app Ycomb_combinatory (theorem_2_4_closed topRecTerm)

/-- A combinator realizes a number-theoretic function on numerals. -/
def Realizes (u : Pomega) (p : Nat -> Nat) : Prop :=
  forall n, funOf u (ofNat n) = ofNat (p n)

def Realizes2 (u : Pomega) (p : Nat -> Nat -> Nat) : Prop :=
  forall n m, funOf (funOf u (ofNat n)) (ofNat m) = ofNat (p n m)

def composeC (u v : Pomega) : Pomega :=
  funOf (funOf Scomb (funOf Kcomb u)) v

theorem composeC_combinatory {u v : Pomega}
  (hu : IsCombinatory u) (hv : IsCombinatory v) :
  IsCombinatory (composeC u v) :=
  .app (.app .S (.app .K hu)) hv

theorem composeC_realizes {u v : Pomega} {p q : Nat -> Nat}
  (hu : Realizes u p) (hv : Realizes v q) :
  Realizes (composeC u v) (p comp q) := fun n => by
  rw [composeC, Scomb_beta3, Kcomb_beta2, hv n, hu (q n)]
  rfl

def constComb (k : Nat) : Pomega := funOf Kcomb (ofNat k)

theorem constComb_combinatory (k : Nat) : IsCombinatory (constComb k) :=
  .app .K (ofNat_combinatory k)

theorem constComb_realizes (k : Nat) : Realizes (constComb k) fun _ => k := fun _ => by
  simp [constComb, Kcomb_beta2]

/-- Scott (2.27) packaged as a combinator. -/
def primRecComb (a f : Pomega) : Pomega :=
  funOf dollarC
    (funOf Ycomb
      (funOf (funOf (interp primRecStepTerm (fun _ => botElem)) a) f))

theorem primRecComb_combinatory {a f : Pomega}
  (ha : IsCombinatory a) (hf : IsCombinatory f) :

```



```

    IsCombinatory (primRecComb a f) :=
    .app dollarC_combinatorial <|
    .app Ycomb_combinatorial <|
    .app (.app (theorem_2_4_closed primRecStepTerm) ha) hf

theorem primRecComb_ofNat (a f : Pomega) (n : Nat) :
  funOf (primRecComb a f) (ofNat n) = primRecVal a f n := by
  have hgraph := primRecStep_graph_of a f
  have hfix := theorem_2_5 (primRecStep_isScottContinuous a f)
  simp only [primRecComb]
  rw [← hgraph, hfix, ← eq_2_27, primRecHat_ofNat]

def addStepC : Pomega := funOf Kcomb sucC

theorem addStepC_combinatorial : IsCombinatory addStepC :=
  .app .K .suc

theorem primRecVal_add (k : Nat) : forall n,
  primRecVal (ofNat k) addStepC n = ofNat (k + n)
| 0 => rfl
| n + 1 => by
  calc primRecVal (ofNat k) addStepC (n + 1)
    = funOf (funOf addStepC (ofNat n))
      (primRecVal (ofNat k) addStepC n) := rfl
  _ = funOf sucC (primRecVal (ofNat k) addStepC n) := by
    simp [addStepC, Kcomb_beta2]
  _ = funOf sucC (ofNat (k + n)) := by rw [primRecVal_add k n]
  _ = ofNat (k + n + 1) := by rw [sucC_app, succSet_ofNat]

/-- `fun x. primRecComb x (K suc)`. -/
def addC : Pomega :=
  funOf (funOf Scomb (funOf Kcomb dollarC))
    (funOf (funOf Scomb (funOf Kcomb Ycomb))
      (funOf (funOf Scomb (interp primRecStepTerm (fun _ => botElem)))
        (funOf Kcomb addStepC)))

theorem addC_app (x : Pomega) : funOf addC x = primRecComb x addStepC := by
  simp [addC, primRecComb, Scomb_beta3, Kcomb_beta2]

theorem addC_combinatorial : IsCombinatory addC :=
  .app (.app .S (.app .K dollarC_combinatorial))
    (.app (.app .S (.app .K Ycomb_combinatorial))
      (.app (.app .S (theorem_2_4_closed primRecStepTerm))
        (.app .K addStepC_combinatorial)))

theorem addC_realizes2 : Realizes2 addC fun n m => n + m := fun n m => by
  simp [Realizes2, addC_app, primRecComb_ofNat, primRecVal_add]

/-- `fun x. x ? 0, x?1`, so numerals stay numerals. -/
def safePredC : Pomega :=
  interp (.lam 0 (.cond (.var 0) .zero (.pred (.var 0)))) (fun _ => botElem)

theorem safePredC_combinatorial : IsCombinatory safePredC :=
  theorem_2_4_closed _

theorem safePredC_zero : funOf safePredC (ofNat 0) = ofNat 0 := by
  simp only [safePredC]
  rw [theorem_2_2_beta]
  simp [interp, envSet, Function.update, eq_2_7_zero]

theorem safePredC_succ (n : Nat) : funOf safePredC (ofNat (n + 1)) = ofNat n := by
  simp only [safePredC]
  rw [theorem_2_2_beta]

```

```

simp [interp, envSet, Function.update, eq_2_7_succ, predSet_ofNat_succ]

def subStepC : Pomega := funOf Kcomb safePredC

theorem subStepC_combinatorial : IsCombinatorial subStepC :=
  .app .K safePredC_combinatorial

theorem primRecVal_sub (k : Nat) : forall n,
  primRecVal (ofNat k) subStepC n = ofNat (k - n)
| 0 => by simp [primRecVal]
| n + 1 => by
  calc primRecVal (ofNat k) subStepC (n + 1)
    = funOf (funOf subStepC (ofNat n))
      (primRecVal (ofNat k) subStepC n) := rfl
  _ = funOf safePredC (primRecVal (ofNat k) subStepC n) := by
    simp [subStepC, Kcomb_beta2]
  _ = funOf safePredC (ofNat (k - n)) := by rw [primRecVal_sub k n]
  _ = ofNat (k - (n + 1)) := by
    cases h : k - n with
    | zero =>
      have : k - (n + 1) = 0 := by omega
      simp [safePredC_zero, this]
    | succ k' =>
      have : k - (n + 1) = k' := by omega
      simp [safePredC_succ, this]

def subC : Pomega :=
  funOf (funOf Scomb (funOf Kcomb dollarC))
    (funOf (funOf Scomb (funOf Kcomb Ycomb))
      (funOf (funOf Scomb (interp primRecStepTerm (fun _ => botElem)))
        (funOf Kcomb subStepC))))

theorem subC_app (x : Pomega) : funOf subC x = primRecComb x subStepC := by
  simp [subC, primRecComb, Scomb_beta3, Kcomb_beta2]

theorem subC_combinatorial : IsCombinatorial subC :=
  .app (.app .S (.app .K dollarC_combinatorial))
    (.app (.app .S (.app .K Ycomb_combinatorial))
      (.app (.app .S (theorem_2_4_closed primRecStepTerm))
        (.app .K subStepC_combinatorial)))

theorem subC_realizes2 : Realizes2 subC fun n m => n - m := fun n m => by
  simp [Realizes2, subC_app, primRecComb_ofNat, primRecVal_sub]

/-- `fun x. primRecComb 0 (K (addC x))`. -/
def mulC : Pomega :=
  funOf (funOf Scomb (funOf Kcomb dollarC))
    (funOf (funOf Scomb (funOf Kcomb Ycomb))
      (funOf (funOf Scomb
        (funOf Kcomb
          (funOf (interp primRecStepTerm (fun _ => botElem)) (ofNat 0))))
        (funOf (funOf Scomb (funOf Kcomb Kcomb)) addC)))

theorem SK_comp (f g x : Pomega) :
  (Scomb ? (Kcomb ? f) ? g) ? x = f ? (g ? x) := by
  rw [Scomb_beta3, Kcomb_beta2]

theorem mulC_app (x : Pomega) :
  mulC ? x = primRecComb (ofNat 0) (Kcomb ? (addC ? x)) := by
  rw [mulC, primRecComb, SK_comp, SK_comp, SK_comp, SK_comp]

theorem mulC_combinatorial : IsCombinatorial mulC :=
  .app (.app .S (.app .K dollarC_combinatorial))

```

```

      (.app (.app .S (.app .K Ycomb_combinatority))
        (.app (.app .S
          (.app .K (.app (theorem_2_4_closed primRecStepTerm)
            (ofNat_combinatority 0))))
          (.app (.app .S (.app .K .K)) addC_combinatority)))

theorem primRecVal_mul (k : Nat) : forall n,
  primRecVal (ofNat 0) (funOf Kcomb (funOf addC (ofNat k))) n = ofNat (k * n)
| 0 => by simp [primRecVal]
| n + 1 => by
  calc primRecVal (ofNat 0) (funOf Kcomb (funOf addC (ofNat k))) (n + 1)
    = funOf (funOf (funOf Kcomb (funOf addC (ofNat k))) (ofNat n))
      (primRecVal (ofNat 0) (funOf Kcomb (funOf addC (ofNat k))) n) :=
      rfl
  _ = funOf (funOf addC (ofNat k))
      (ofNat (k * n)) := by
    rw [Kcomb_beta2, primRecVal_mul k n]
  _ = ofNat (k + k * n) := addC_realizes2 k (k * n)
  _ = ofNat (k * (n + 1)) := by rw [Nat.mul_succ, Nat.add_comm]

theorem mulC_realizes2 : Realizes2 mulC fun n m => n * m := fun n m => by
  simp [Realizes2, mulC_app, primRecComb_ofNat, primRecVal_mul]

/-- `cond 1 0 n` is `1` on `0` and `0` on positive numerals. -/
def isZeroC : Pomega := funOf (funOf condC (ofNat 1)) (ofNat 0)

theorem isZeroC_combinatority : IsCombinatority isZeroC :=
  .app (.app .cond (ofNat_combinatority 1)) (ofNat_combinatority 0)

theorem isZeroC_zero : funOf isZeroC (ofNat 0) = ofNat 1 := by
  simp only [isZeroC]
  rw [condC_beta3, eq_2_7_zero]

theorem isZeroC_succ (n : Nat) : funOf isZeroC (ofNat (n + 1)) = ofNat 0 := by
  simp only [isZeroC]
  rw [condC_beta3]
  exact eq_2_7_succ (ofNat 1) (ofNat 0) n

/-- `fun n fun m. isZero (n ? m)` -/
def leC : Pomega :=
  Scomb ? (Kcomb ? (Scomb ? (Kcomb ? isZeroC))) ? subC

theorem leC_combinatority : IsCombinatority leC :=
  .app (.app .S (.app .K (.app .S (.app .K isZeroC_combinatority))))
    subC_combinatority

theorem leC_realizes2 (n m : Nat) :
  funOf (funOf leC (ofNat n)) (ofNat m) =
    ofNat (if n <= m then 1 else 0) := by
  unfold leC
  rw [Scomb_beta3, Kcomb_beta2, Scomb_beta3, Kcomb_beta2, subC_realizes2]
  by_cases h : n <= m
  * have : n - m = 0 := Nat.sub_eq_zero_of_le h
    simp [h, this, isZeroC_zero]
  * have : 0 < n - m := Nat.sub_pos_of_lt (Nat.not_le.mp h)
    obtain <k, hk> := Nat.exists_eq_succ_of_ne_zero this.ne'
    simp [h, hk, isZeroC_succ]

/-- `fun a fun b. (b-a) ? (a*a+a+b), (b*b+a)` with free `add, mul, sub`. -/
def pairTerm : Term :=
  .lam 3 (.lam 4
    (.cond (.app (.app (.var 2) (.var 4)) (.var 3))
      (.app (.app (.var 0)

```

```

      (.app (.app (.var 0)
        (.app (.app (.var 1) (.var 3)) (.var 3)))
        (.var 3)))
      (.var 4))
    (.app (.app (.var 0)
      (.app (.app (.var 1) (.var 4)) (.var 4)))
      (.var 3))))

def arithEnv : Nat -> Pomega
| 0 => addC
| 1 => mulC
| 2 => subC
| _ => botElem

theorem arithEnv_combinatorial : forall i, IsCombinatorial (arithEnv i)
| 0 => addC_combinatorial
| 1 => mulC_combinatorial
| 2 => subC_combinatorial
| n + 3 => by
  have hbot : funOf predC zeroC = botElem := by
    rw [predC_app]; exact eq_2_6
  simp [arithEnv, hbot] using
    IsCombinatorial.app IsCombinatorial.pred IsCombinatorial.zero

def pairComb : Pomega := interp pairTerm arithEnv

theorem pairComb_combinatorial : IsCombinatorial pairComb := by
  rw [pairComb, theorem_2_4_complete]
  exact ofComb_combinatorial _ _ arithEnv_combinatorial

theorem pairComb_app (n m : Nat) :
  funOf (funOf pairComb (ofNat n)) (ofNat m) = ofNat (Nat.pair n m) := by
  unfold pairComb pairTerm
  rw [theorem_2_2_beta, theorem_2_2_beta]
  simp [interp, envSet, Function.update, arithEnv]
  rw [subC_realizes2, mulC_realizes2, mulC_realizes2, addC_realizes2,
    addC_realizes2, addC_realizes2]
  simp [Nat.pair]
  by_cases h : n < m
  * have : m - n != 0 := Nat.sub_ne_zero_of_lt h
    obtain <k, hk> := Nat.exists_eq_succ_of_ne_zero this
    rw [hk, eq_2_7_succ]
    simp [h]
  * have : m - n = 0 := Nat.sub_eq_zero_of_le (Nat.not_lt.mp h)
    rw [this, eq_2_7_zero]
    simp [h]

/-! ### The appendix converse: primitive-recursive realizability -/

/-- Primitive recursion with zero initial value, viewed as an operator on its step. -/
def primRecZeroC : Pomega :=
  Scomb ? (Kcomb ? dollarC) ?
    (Scomb ? (Kcomb ? Ycomb) ?
      (interp primRecStepTerm (fun _ => botElem) ? ofNat 0))

```

Lean 4 source (lines 1201–1600)

```

theorem primRecZeroC_combinatorial : IsCombinatorial primRecZeroC :=
  .app (.app .S (.app .K dollarC_combinatorial))
    (.app (.app .S (.app .K Ycomb_combinatorial))
      (.app (theorem_2_4_closed primRecStepTerm) (ofNat_combinatorial 0)))

theorem primRecZeroC_app (f : Pomega) :
  primRecZeroC ? f = primRecComb (ofNat 0) f := by

```

```

    rw [primRecZeroC, SK_comp, SK_comp]
    rfl

/-- The bounded iteration used to compute `Nat.sqrt n`. -/
def sqrtIter (n : Nat) : Nat -> Nat
| 0 => 0
| k + 1 =>
    let a := sqrtIter n k
    if (a + 1) * (a + 1) <= n then a + 1 else a

theorem sqrtIter_eq_min (n k : Nat) : sqrtIter n k = min k (Nat.sqrt n) := by
    induction k with
    | zero => simp [sqrtIter]
    | succ k ih =>
        rw [sqrtIter, ih]
        by_cases h : k < Nat.sqrt n
        * have hmin : min k (Nat.sqrt n) = k := min_eq_left h.le
          have hs : (k + 1) * (k + 1) <= n := Nat.le_sqrt.mp h
          simp [hmin, hs, min_eq_left (Nat.succ_le_iff.mpr h)]
        * have hk : Nat.sqrt n <= k := Nat.le_of_not_gt h
          have hmin : min k (Nat.sqrt n) = Nat.sqrt n := min_eq_right hk
          have hs : not (Nat.sqrt n + 1) * (Nat.sqrt n + 1) <= n :=
              Nat.not_le.mpr (Nat.lt_succ_sqrt n)
          simp [hmin, hs, min_eq_right (hk.trans (Nat.le_succ k))]

theorem sqrtIter_self (n : Nat) : sqrtIter n n = Nat.sqrt n := by
    rw [sqrtIter_eq_min, min_eq_right (Nat.sqrt_le_self n)]

def sqrtEnv : Nat -> Pomega
| 3 => leC
| 4 => mulC
| _ => botElem

/-- `fun n _ a. if (a+1)^2 <= n then a+1 else a`. -/
def sqrtStepTerm : Term :=
    .lam 0 (.lam 1 (.lam 2
        (.cond
            (.app (.app (.var 3)
                (.app (.app (.var 4) (.succ (.var 2))) (.succ (.var 2))))
                (.var 0))
            (.var 2)
            (.succ (.var 2)))))

def sqrtStepC : Pomega := interp sqrtStepTerm sqrtEnv

theorem botElem_combinatorial : IsCombinatorial botElem := by
    have h : predC ? zeroC = botElem := by
        rw [predC_app]
        simpa [zeroC] using eq_2_6
    exact h |> .app .pred .zero

theorem sqrtEnv_combinatorial : forall i, IsCombinatorial (sqrtEnv i)
| 3 => leC_combinatorial
| 4 => mulC_combinatorial
| 0 | 1 | 2 => botElem_combinatorial
| _ + 5 => botElem_combinatorial

theorem sqrtStepC_combinatorial : IsCombinatorial sqrtStepC := by
    rw [sqrtStepC, theorem_2_4_complete]
    exact ofComb_combinatorial _ _ sqrtEnv_combinatorial

theorem sqrtStepC_app (n i a : Nat) :
    ((sqrtStepC ? ofNat n) ? ofNat i) ? ofNat a =

```

```

    ofNat (if (a + 1) * (a + 1) <= n then a + 1 else a) := by
  unfold sqrtStepC sqrtStepTerm
  rw [theorem_2_2_beta, theorem_2_2_beta, theorem_2_2_beta]
  simp only [interp, envSet, Function.update_self,
    Function.update_of_ne (by decide : (3 : Nat) != 0),
    Function.update_of_ne (by decide : (4 : Nat) != 0),
    Function.update_of_ne (by decide : (3 : Nat) != 1),
    Function.update_of_ne (by decide : (4 : Nat) != 1),
    Function.update_of_ne (by decide : (3 : Nat) != 2),
    Function.update_of_ne (by decide : (4 : Nat) != 2), sqrtEnv]
  simp [Function.update]
  rw [succSet_ofNat, mulC_realizes2, leC_realizes2]
  by_cases h : (a + 1) * (a + 1) <= n
  * simp [h, eq_2_7_succ]
  * simp [h, eq_2_7_zero]

/-- A combinator realizing integer square root. -/
def sqrtC : Pomega :=
  Scomb ?
    (Scomb ? (Kcomb ? primRecZeroC) ? sqrtStepC) ?
    (Scomb ? Kcomb ? Kcomb)

theorem sqrtC_combinatorial : IsCombinatorial sqrtC :=
  .app
    (.app .S
      (.app (.app .S (.app .K primRecZeroC_combinatorial))
        sqrtStepC_combinatorial))
    (.app (.app .S .K) .K)

theorem primRecVal_sqrt (n : Nat) : forall k,
  primRecVal (ofNat 0) (sqrtStepC ? ofNat n) k = ofNat (sqrtIter n k)
| 0 => rfl
| k + 1 => by
  rw [show primRecVal (ofNat 0) (sqrtStepC ? ofNat n) (k + 1) =
    ((sqrtStepC ? ofNat n) ? ofNat k) ?
    primRecVal (ofNat 0) (sqrtStepC ? ofNat n) k by rfl,
    primRecVal_sqrt n k, sqrtStepC_app]
  rfl

theorem sqrtC_realizes : Realizes sqrtC Nat.sqrt := fun n => by
  rw [sqrtC, Scomb_beta3, Scomb_beta3, Scomb_beta3, Kcomb_beta2, Kcomb_beta2,
    primRecZeroC_app, primRecComb_ofNat,
    primRecVal_sqrt, sqrtIter_self]

def unpairEnv : Nat -> Pomega
| 1 => sqrtC
| 2 => subC
| 3 => mulC
| 4 => leC
| _ => botElem

def unpairSqrtTerm : Term := .app (.var 1) (.var 0)
def unpairSquareTerm : Term :=
  .app (.app (.var 3) unpairSqrtTerm) unpairSqrtTerm
def unpairDeltaTerm : Term :=
  .app (.app (.var 2) (.var 0)) unpairSquareTerm
def unpairTestTerm : Term :=
  .app (.app (.var 4) (.succ unpairDeltaTerm)) unpairSqrtTerm

def unpairFstTerm : Term :=
  .lam 0 (.cond unpairTestTerm unpairSqrtTerm unpairDeltaTerm)

def unpairSndTerm : Term :=

```

```

.lam 0 (.cond unpairTestTerm
  (.app (.app (.var 2) unpairDeltaTerm) unpairSqrtTerm)
  unpairSqrtTerm)

def unpairFstC : Pomega := interp unpairFstTerm unpairEnv
def unpairSndC : Pomega := interp unpairSndTerm unpairEnv

theorem unpairEnv_combinatorial : forall i, IsCombinatorial (unpairEnv i)
| 1 => sqrtC_combinatorial
| 2 => subC_combinatorial
| 3 => mulC_combinatorial
| 4 => leC_combinatorial
| 0 => botElem_combinatorial
| _ + 5 => botElem_combinatorial

theorem unpairFstC_combinatorial : IsCombinatorial unpairFstC := by
rw [unpairFstC, theorem_2_4_complete]
exact ofComb_combinatorial _ _ unpairEnv_combinatorial

theorem unpairSndC_combinatorial : IsCombinatorial unpairSndC := by
rw [unpairSndC, theorem_2_4_complete]
exact ofComb_combinatorial _ _ unpairEnv_combinatorial

theorem unpairFstC_realizes : Realizes unpairFstC (fun n => n.unpair.1) := fun n => by
rw [unpairFstC, unpairFstTerm, theorem_2_2_beta]
simp only [unpairTestTerm, unpairDeltaTerm, unpairSquareTerm, unpairSqrtTerm,
  interp, envSet, Function.update_self,
  Function.update_of_ne (by decide : (1 : Nat) != 0),
  Function.update_of_ne (by decide : (2 : Nat) != 0),
  Function.update_of_ne (by decide : (3 : Nat) != 0),
  Function.update_of_ne (by decide : (4 : Nat) != 0), unpairEnv]
rw [sqrtC_realizes, mulC_realizes2, subC_realizes2, succSet_ofNat,
  leC_realizes2]
unfold Nat.unpair
by_cases h : n - Nat.sqrt n * Nat.sqrt n < Nat.sqrt n
* have hle : n - Nat.sqrt n * Nat.sqrt n + 1 <= Nat.sqrt n :=
  Nat.succ_le_iff.mpr h
  simp [h, hle, eq_2_7_succ]
* have hle : not n - Nat.sqrt n * Nat.sqrt n + 1 <= Nat.sqrt n := by omega
  simp [h, hle, eq_2_7_zero]

theorem unpairSndC_realizes : Realizes unpairSndC (fun n => n.unpair.2) := fun n => by
rw [unpairSndC, unpairSndTerm, theorem_2_2_beta]
simp only [unpairTestTerm, unpairDeltaTerm, unpairSquareTerm, unpairSqrtTerm,
  interp, envSet, Function.update_self,
  Function.update_of_ne (by decide : (1 : Nat) != 0),
  Function.update_of_ne (by decide : (2 : Nat) != 0),
  Function.update_of_ne (by decide : (3 : Nat) != 0),
  Function.update_of_ne (by decide : (4 : Nat) != 0), unpairEnv]
rw [sqrtC_realizes, mulC_realizes2, subC_realizes2, succSet_ofNat,
  leC_realizes2, subC_realizes2]
unfold Nat.unpair
by_cases h : n - Nat.sqrt n * Nat.sqrt n < Nat.sqrt n
* have hle : n - Nat.sqrt n * Nat.sqrt n + 1 <= Nat.sqrt n :=
  Nat.succ_le_iff.mpr h
  simp [h, hle, eq_2_7_succ]
* have hle : not n - Nat.sqrt n * Nat.sqrt n + 1 <= Nat.sqrt n := by omega
  simp [h, hle, eq_2_7_zero]

/-- Curried operator `fun a f. primRecComb a f`. -/
def primRecOpEnv : Nat -> Pomega
| 2 => dollarC
| 3 => Ycomb

```

```

| 4 => interp primRecStepTerm (fun _ => botElem)
| _ => botElem

def primRecOpTerm : Term :=
  .lam 0 (.lam 1
    (.app (.var 2)
      (.app (.var 3) (.app (.app (.var 4) (.var 0)) (.var 1))))))

def primRecOpC : Pomega := interp primRecOpTerm primRecOpEnv

theorem primRecOpEnv_combinatorial : forall i, IsCombinatorial (primRecOpEnv i)
| 2 => dollarC_combinatorial
| 3 => Ycomb_combinatorial
| 4 => theorem_2_4_closed primRecStepTerm
| 0 | 1 => botElem_combinatorial
| _ + 5 => botElem_combinatorial

theorem primRecOpC_combinatorial : IsCombinatorial primRecOpC := by
  rw [primRecOpC, theorem_2_4_complete]
  exact ofComb_combinatorial _ _ primRecOpEnv_combinatorial

theorem primRecOpC_app (a f : Pomega) :
  (primRecOpC ? a) ? f = primRecComb a f := by
  rw [primRecOpC, primRecOpTerm, theorem_2_2_beta, theorem_2_2_beta]
  simp [interp, envSet, Function.update, primRecOpEnv, primRecComb]

def pairRealizer (u v : Pomega) : Pomega :=
  Scomb ? (Scomb ? (Kcomb ? pairComb) ? u) ? v

theorem pairRealizer_combinatorial {u v : Pomega}
  (hu : IsCombinatorial u) (hv : IsCombinatorial v) :
  IsCombinatorial (pairRealizer u v) :=
  .app (.app .S (.app (.app .S (.app .K pairComb_combinatorial)) hu)) hv

theorem pairRealizer_realizes {u v : Pomega} {p q : Nat -> Nat}
  (hu : Realizes u p) (hv : Realizes v q) :
  Realizes (pairRealizer u v) (fun n => Nat.pair (p n) (q n)) := fun n => by
  rw [pairRealizer, Scomb_beta3, Scomb_beta3, Kcomb_beta2,
    hu, hv, pairComb_app]

/-- Environment for the primitive-recursion constructor of `Nat.Primrec`. -/
def precEnv (f g : Pomega) : Nat -> Pomega
| 3 => primRecOpC
| 4 => f
| 5 => g
| 6 => unpairFstC
| 7 => unpairSndC
| 8 => pairComb
| _ => botElem

/-- On packed input `(z,n)`, recurse from `f z` with
step `fun y ih. g (pair z (pair y ih))`. -/
def precTerm : Term :=
  .lam 0
  (.app
    (.app
      (.app (.var 3) (.app (.var 4) (.app (.var 6) (.var 0))))
      (.lam 1 (.lam 2
        (.app (.var 5)
          (.app (.app (.var 8) (.app (.var 6) (.var 0)))
            (.app (.app (.var 8) (.var 1)) (.var 2)))))))
      (.app (.var 7) (.var 0)))

```



```

def precC (f g : Pomega) : Pomega := interp precTerm (precEnv f g)

theorem precEnv_combinatorial {f g : Pomega}
  (hf : IsCombinatorial f) (hg : IsCombinatorial g) :
  forall i, IsCombinatorial (precEnv f g i)
| 3 => primRecOpC_combinatorial
| 4 => hf
| 5 => hg
| 6 => unpairFstC_combinatorial
| 7 => unpairSndC_combinatorial
| 8 => pairComb_combinatorial
| 0 | 1 | 2 => botElem_combinatorial
| _ + 9 => botElem_combinatorial

theorem precC_combinatorial {f g : Pomega}
  (hf : IsCombinatorial f) (hg : IsCombinatorial g) :
  IsCombinatorial (precC f g) := by
  rw [precC, theorem_2_4_complete]
  exact ofComb_combinatorial _ _ (precEnv_combinatorial hf hg)

theorem precC_realizes {f g : Pomega} {p q : Nat -> Nat}
  (hf : Realizes f p) (hg : Realizes g q) :
  Realizes (precC f g)
    (Nat.unpaired fun z n => n.rec (p z) fun y ih => q (Nat.pair z (Nat.pair y ih))) := by
  intro w
  rw [precC, precTerm, theorem_2_2_beta]
  simp only [interp, envSet, Function.update_self,
    Function.update_of_ne (by decide : (3 : Nat) != 0),
    Function.update_of_ne (by decide : (4 : Nat) != 0),
    Function.update_of_ne (by decide : (5 : Nat) != 0),
    Function.update_of_ne (by decide : (6 : Nat) != 0),
    Function.update_of_ne (by decide : (7 : Nat) != 0),
    Function.update_of_ne (by decide : (8 : Nat) != 0), precEnv]
  simp [Function.update]
  rw [unpairFstC_realizes, unpairSndC_realizes, hf, primRecOpC_app,
    primRecComb_ofNat]
  let z := w.unpair.1
  let step : Pomega :=
    interp (.lam 1 (.lam 2
      (.app (.var 5)
        (.app (.app (.var 8) (ofNat z |> fun _ => .app (.var 6) (.var 0)))
          (.app (.app (.var 8) (.var 1)) (.var 2))))))
      (Function.update (precEnv f g) 0 (ofNat w))
  have hstep (y ih : Nat) :
    (step ? ofNat y) ? ofNat ih =
      ofNat (q (Nat.pair z (Nat.pair y ih))) := by
  dsimp [step, z]
  rw [theorem_2_2_beta, theorem_2_2_beta]
  simp [interp, envSet, Function.update, precEnv]
  rw [unpairFstC_realizes, pairComb_app, pairComb_app, hg]
  have hrec : forall n,
    primRecVal (ofNat (p z)) step n =
      ofNat (n.rec (p z) fun y ih => q (Nat.pair z (Nat.pair y ih))) := by
  intro n
  induction n with
  | zero => rfl
  | succ n ih =>
    change (step ? ofNat n) ? primRecVal (ofNat (p z)) step n = _
    rw [ih, hstep]
  exact hrec w.unpair.2

/-- Every unary primitive-recursive function has a combinational realizer. -/
theorem primrec_realized {p : Nat -> Nat} (hp : Nat.Primrec p) :

```

```

    exists u, IsCombinatory u /\ Realizes u p := by
induction hp with
| zero =>
    exact <constComb 0, constComb_combinatorial 0, constComb_realizes 0>
| succ =>
    exact <sucC, .suc, fun n => by rw [sucC_app, succSet_ofNat]>
| left =>
    exact <unpairFstC, unpairFstC_combinatorial, unpairFstC_realizes>
| right =>
    exact <unpairSndC, unpairSndC_combinatorial, unpairSndC_realizes>
| pair _ _ ihf ihg =>
    obtain <u, hu, hru> := ihf
    obtain <v, hv, hrv> := ihg
    exact <pairRealizer u v, pairRealizer_combinatorial hu hv,
      pairRealizer_realizes hru hrv>
| comp _ _ ihf ihg =>
    obtain <u, hu, hru> := ihf
    obtain <v, hv, hrv> := ihg
    exact <composeC u v, composeC_combinatorial hu hv, composeC_realizes hru hrv>
| prec _ _ ihf ihg =>
    obtain <u, hu, hru> := ihf
    obtain <v, hv, hrv> := ihg
    exact <precC u v, precC_combinatorial hu hv, precC_realizes hru hrv>

/-- Stage-bounded enumerator associated to a partial-recursive code. -/
def enumFun (c : Code) (t : Nat) : Nat :=
  bif (evaln t.unpair.2 c t.unpair.1).isSome
    then t.unpair.1 + 1
    else 0

theorem primrec_enumFun (c : Code) : Nat.Primrec (enumFun c) := by
  have heval : Primrec fun t : Nat => evaln t.unpair.2 c t.unpair.1 :=
    primrec_evaln.comp <|
      Primrec.pair
        (Primrec.pair (Primrec.snd.comp Primrec.unpair) (Primrec.const c))
        (Primrec.fst.comp Primrec.unpair)
  have h : Primrec fun t : Nat =>
    bif (evaln t.unpair.2 c t.unpair.1).isSome
      then t.unpair.1 + 1 else 0 :=
    (Primrec.cond (Primrec.option_isSome.comp heval)
      (Primrec.succ.comp (Primrec.fst.comp Primrec.unpair))
      (Primrec.const 0)).of_eq fun t => by simp [Nat.succ_eq_add_one]
  exact Primrec.nat_iff.mp (h.of_eq fun _ => rfl)

def enumRangeC (r : Pomega) : Pomega :=
  (dollarC ? r) ? topElem

theorem enumRangeC_combinatorial {r : Pomega} (hr : IsCombinatory r) :
  IsCombinatory (enumRangeC r) :=
  .app (.app dollarC_combinatorial hr) topElem_combinatorial

theorem enumRangeC_eq {r : Pomega} {p : Nat -> Nat} (hr : Realizes r p) :
  enumRangeC r = ? n, ofNat (p n) := by
  rw [enumRangeC, eq_2_25]
  ext k
  constructor
  * intro hk
    obtain <n, _, hkn> := Set.mem_iUnion_2.mp hk
    exact Set.mem_iUnion.mpr <n, by simp [hr n] using hkn>
  * intro hk
    obtain <n, hkn> := Set.mem_iUnion.mp hk
    exact Set.mem_iUnion_2.mpr <n, Set.mem_univ n, by simp [hr n] using hkn>

```

```

/-- **Scott 1976, Appendix.** Every r.e. element belongs to the
combinatory closure. -/
theorem IsRE.combinatory {u : Pomega} (hu : IsRE u) : IsCombinatory u := by
  have hpart : Partrec fun k : Nat =>
    Part.assert (k in u) fun _ => Part.some (0 : Nat) :=
    hu.map (Computable.const (0 : Nat)).to_2
  obtain <c, hc> := Code.exists_code.1 (Partrec.nat_iff.1 hpart)
  obtain <r, hr, hreal> := primrec_realized (primrec_enumFun c)
  have hrange := enumRangeC_eq hreal
  have hpred : DataTypesAsLattices.predSet (enumRangeC r) = u := by
    ext n
    constructor
  * intro hn
    rw [hrange] at hn
    obtain <t, ht> := Set.mem_iUnion.mp hn

```

Lean 4 source (lines 1601–1664)

```

  have heq : enumFun c t = n + 1 := by simpa [ofNat] using ht.symm
  have hs : (evaln t.unpair.2 c t.unpair.1).isSome = true := by
    by_contra h
    have : (evaln t.unpair.2 c t.unpair.1).isSome = false :=
      Bool.eq_false_of_not_eq_true h
    simp [enumFun, this] at heq
  have hfirst : t.unpair.1 = n := by
    simp [enumFun, hs] at heq
    omega
  obtain <v, hv> := Option.isSome_iff_exists.mp hs
  have hmem : v in Code.eval c t.unpair.1 :=
    evaln_sound (by simpa [Option.mem_def] using hv)
  rw [hc] at hmem
  simpa [hfirst] using (Part.mem_assert_iff.mp hmem).1
  * intro hn
    have hmem : 0 in Code.eval c n := by
      rw [hc]
      exact Part.mem_assert_iff.mpr <hn, Part.mem_some_iff.mpr rfl>
    obtain <s, hs> := evaln_complete.mp hmem
    rw [hrange]
    refine Set.mem_iUnion.mpr <Nat.pair n s, ?_>
    have hsome : (evaln s c n).isSome = true := Option.isSome_of_mem hs
    simp [enumFun, Nat.unpair_pair, hsome, ofNat]
  have hcomb : IsCombinatory (DataTypesAsLattices.predC ? enumRangeC r) :=
    .app .pred (enumRangeC.combinatory hr)
  rw [DataTypesAsLattices.predC_app, hpred] at hcomb
  exact hcomb

theorem IsRE.iff_combinatory {u : Pomega} : IsRE u <=> IsCombinatory u :=
  <IsRE.combinatory, combinatory_isRE>

/-- **Scott 1976, Theorem 2.6 (The definability theorem), unary case.**
For a continuous `f`, computability, recursive enumerability of the graph,
combinatory definability, and closed LAMBDA-definability agree. -/
theorem theorem_2_6 {f : Pomega -> Pomega} (hf : IsScottContinuous f) :
  (IsComputable f <=> IsRE (graph f)) /\
  (IsRE (graph f) <=> IsCombinatory (graph f)) /\
  (IsLambdaDefinable (graph f) <=> IsCombinatory (graph f)) := by
  refine <?, IsRE.iff_combinatory, ?_>
  * exact <fun h => h.2, fun h => <hf, h>>
  * exact <fun <t, ht> => by simpa [ht] using theorem_2_4_closed t,
    combinatory_isLambdaDefinable>

/-- **Scott 1976, S2, Definition.** A `k`-ary continuous map is computable
when its nested graph (the pairing encoding of
`m in f(e n_0)?(e n_{k-1})`) is r.e. -/

```

```

def IsComputableFin {n : Nat} (f : (Fin n -> Pomega) -> Pomega) : Prop :=
  IsScottContinuousFin f /\ IsRE (curryFin f)

/-- **Scott 1976, Theorem 2.6 (The definability theorem).**
For a `k`-ary continuous `f`, computability of the finite-argument relation,
recursive enumerability of the nested graph, combinatory definability, and
closed LAMBDA-definability agree. -/
theorem theorem_2_6_fin {n : Nat} {f : (Fin n -> Pomega) -> Pomega}
  (hf : IsScottContinuousFin f) :
  (IsComputableFin f <-> IsRE (curryFin f)) /\
  (IsRE (curryFin f) <-> IsCombinatory (curryFin f)) /\
  (IsLambdaDefinable (curryFin f) <-> IsCombinatory (curryFin f)) := by
  refine <?_, IsRE.iff_combinatory, ?_>
  * exact <fun h => h.2, fun h => <hf, h>>
  * exact <fun <t, ht> => by simpa [ht] using theorem_2_4_closed t,
    combinatory_isLambdaDefinable>

end Scott1976.DataTypesAsLattices

```

A.9 Scott1976/DataTypesAsLattices/Enumeration.lean

2998 lines.

Lean 4 source (lines 1–400)

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/
import Mathlib.Computability.Halting
import Scott1976.DataTypesAsLattices.Computability
import Scott1976.DataTypesAsLattices.Functionality

/-!
# Scott 1976, S3 -- enumeration, degrees, and the semigroup of operators

Theorems 3.1–3.7.
-/

set_option maxHeartbeats 2000000

namespace Scott1976.DataTypesAsLattices

/-- Packed 5-tuple of the remaining combinators of Theorem 2.4. -/
def Gpack : Pomega :=
  seq2 sucC (seq2 predC (seq2 condC (seq2 Kcomb Scomb)))

/-- **Scott 1976, (3.3).** `G = cond(<suc, pred, cond, K, S>)(0)` -/
def Gcomb : Pomega :=
  graph (fun z => condSet z Gpack zeroC)

theorem Gcomb_app (z : Pomega) :
  funOf Gcomb z = condSet z Gpack zeroC :=
  beta (condSet_isScottContinuous_left Gpack zeroC) z

theorem Gcomb_zero : funOf Gcomb (ofNat 0) = Gpack := by
  rw [Gcomb_app, eq_2_7_zero]

theorem Gcomb_succ (k : Nat) : funOf Gcomb (ofNat (k + 1)) = zeroC := by
  rw [Gcomb_app, eq_2_7_succ]

theorem Gcomb_bot : funOf Gcomb botElem = botElem := by

```

```

rw [Gcomb_app, eq_2_7_bot]

theorem condC_app2 (x y : Pomega) :
  funOf (funOf condC x) y = graph (fun z => condSet z x y) :=
  condC_beta2 x y

/-- `0 notin cond(x)(y)`, since `0 = (0,0)` and `e_0 ? x, y = False`. -/
theorem not_mem_zero_cond_graph (x y : Pomega) :
  0 notin funOf (funOf condC x) y := by
  intro h
  rw [condC_app2] at h
  rcases h with <n, m, hm, hmem>
  have : pair n m = pair 0 0 := by
    simpa [pair_zero_zero] using hm.symm
  obtain <rfl, rfl> := pair_inj this
  simp [e_zero, condSet, botElem] at hmem

theorem cond_graph_eq_bot_iff (x y : Pomega) :
  funOf (funOf condC x) y = botElem <-> x = botElem /\ y = botElem := by
  constructor
  * intro h
  constructor
  * have := congrArg (fun w => funOf w (ofNat 0)) h
    rw [condC_beta3, eq_2_7_zero, funOf_botElem] at this
    exact this
  * have := congrArg (fun w => funOf w (ofNat 1)) h
    rw [condC_beta3, eq_2_7_succ, funOf_botElem] at this
    exact this
  * intro <hx, hy>
    rw [condC_app2, hx, hy]
    ext p
    constructor
    * intro hp
      rcases hp with <n, m, _, hm>
      simp [condSet, botElem] at hm
    * intro hp
      exact hp.elim

/-- **Scott 1976, (3.1).** `cond(x)(y)(cond(x)(y)) = y`. -/
theorem eq_3_1 (x y : Pomega) :
  funOf (funOf (funOf condC x) y) (funOf (funOf condC x) y) = y := by
  rw [condC_beta3]
  by_cases hxy : x = botElem /\ y = botElem
  * rcases hxy with <rfl, rfl>
    have : funOf (funOf condC botElem) botElem = botElem :=
      (cond_graph_eq_bot_iff botElem botElem).mpr <rfl, rfl>
    simp [this, condSet, botElem]
  * have hne : funOf (funOf condC x) y != botElem := by
    intro h
    exact hxy ((cond_graph_eq_bot_iff x y).mp h)
    exact eq_2_7_pos x y (funOf (funOf condC x) y)
    (not_mem_zero_cond_graph x y) hne

/-- **Scott 1976, (3.2).** `cond(x)(y)(0) = x`. -/
theorem eq_3_2 (x y : Pomega) :
  funOf (funOf (funOf condC x) y) zeroC = x := by
  rw [condC_beta3]
  have : zeroC = ofNat 0 := rfl
  simpa [this] using eq_2_7_zero x y

/-- `0 notin G`, so `G` is a positive non-zero test. -/
theorem not_mem_zero_Gcomb : 0 notin Gcomb := by
  intro h

```

```

rcases h with <n, m, hm, hmem>
have hnm : n = 0 /\ m = 0 := by
  have : pair n m = 0 := hm.symm
  have : pair n m = pair 0 0 := by simpa [pair_zero_zero] using this
  exact pair_inj this
rcases hnm with <rfl, rfl>
simp [e_zero, condSet, botElem] at hmem

theorem Gpack_ne_bot : Gpack != botElem := by
  intro h
  have hs : sucC = funOf botElem (ofNat 0) := by
    have := congrArg (fun w => funOf w (ofNat 0)) h
    simpa [Gpack, seq2_app_zero] using this
  have h1 : (1 : Nat) in funOf sucC (ofNat 0) := by
    rw [sucC_app]; exact <0, rfl, rfl>
  rw [hs] at h1
  simp [funOf, botElem] at h1

/-- **Scott 1976, (3.8).** `G(G) = 0`. -/
theorem Gcomb_app_self : funOf Gcomb Gcomb = zeroC := by
  have hne : Gcomb != botElem := by
    intro h
    have : Gpack = funOf botElem (ofNat 0) := by
      have := congrArg (fun w => funOf w (ofNat 0)) h
      simpa [Gcomb_zero] using this
    have hbot : funOf botElem (ofNat 0) = botElem := by
      ext; simp [funOf, botElem]
    exact Gpack_ne_bot (this.trans hbot)
  rw [Gcomb_app]
  exact eq_2_7_pos Gpack zeroC Gcomb not_mem_zero_Gcomb hne

theorem Gpack_zero : funOf Gpack (ofNat 0) = sucC := by
  simp [Gpack, seq2_app_zero]

theorem Gpack_one : funOf Gpack (ofNat 1) =
  seq2 predC (seq2 condC (seq2 Kcomb Scomb)) := by
  simp [Gpack, seq2_app_one]

/-- The six constants are recovered from `G` and `0` by projection. -/
theorem sucC_from_G : sucC = funOf (funOf Gcomb zeroC) zeroC := by
  have : zeroC = ofNat 0 := rfl
  simp [this, Gcomb_zero, Gpack_zero]

theorem predC_from_G :
  predC = funOf (funOf (funOf Gcomb zeroC) (ofNat 1)) zeroC := by
  have : zeroC = ofNat 0 := rfl
  simp [this, Gcomb_zero, Gpack_one, seq2_app_zero]

theorem condC_from_G :
  condC =
    funOf (funOf (funOf (funOf Gcomb zeroC) (ofNat 1)) (ofNat 1))
      zeroC := by
  have : zeroC = ofNat 0 := rfl
  simp [this, Gcomb_zero, Gpack_one, seq2_app_one, seq2_app_zero]

theorem Kcomb_from_G :
  Kcomb =
    funOf (funOf (funOf (funOf (funOf Gcomb zeroC) (ofNat 1)) (ofNat 1))
      (ofNat 1)) zeroC := by
  have : zeroC = ofNat 0 := rfl
  simp [this, Gcomb_zero, Gpack_one, seq2_app_one, seq2_app_one, seq2_app_zero]

theorem Scomb_from_G :

```

```

Scomb =
  funOf (funOf (funOf (funOf (funOf Gcomb zeroC) (ofNat 1)) (ofNat 1))
    (ofNat 1)) (ofNat 1) := by
have : zeroC = ofNat 0 := rfl
simp [this, Gcomb_zero, Gpack_one, seq2_app_one, seq2_app_one, seq2_app_one]

theorem bot_combinatorial : IsCombinatorial botElem :=
  (show funOf predC zeroC = botElem by rw [predC_app]; exact eq_2_6) |>
  IsCombinatorial.app IsCombinatorial.pred IsCombinatorial.zero

/-- `seq2 x y` is the combinator `S (S (K (cond x)) (S (K (cond y False)) pred)) I`. -/
theorem seq2_eq_SK (x y : Pomega) :
  seq2 x y =
    funOf (funOf Scomb
      (funOf (funOf Scomb (funOf Kcomb (funOf condC x)))
        (funOf (funOf Scomb
          (funOf Kcomb (funOf (funOf condC y) (funOf predC zeroC))))
            predC)))
      (funOf (funOf Scomb Kcomb) Kcomb) := by
have hnter :
  funOf (funOf Scomb
    (funOf Kcomb (funOf (funOf condC y) (funOf predC zeroC))))
    predC =
  graph (fun z => condSet (predSet z) y botElem) := by
rw [Scomb_beta2]
apply congrArg graph
funext z
rw [Kcomb_beta2, predC_app, predC_app]
have : zeroC = ofNat 0 := rfl
rw [this, eq_2_6, condC_beta3]
have hF :
  funOf (funOf Scomb (funOf Kcomb (funOf condC x)))
    (funOf (funOf Scomb
      (funOf Kcomb (funOf (funOf condC y) (funOf predC zeroC))))
      predC) =
  graph (fun z =>
    funOf (funOf condC x) (condSet (predSet z) y botElem)) := by
rw [Scomb_beta2, hnter]
apply congrArg graph
funext z
rw [Kcomb_beta2]
apply congrArg (funOf (funOf condC x))
exact beta (theorem_1_3 (condSet_isScottContinuous_left y botElem)
  predSet_isScottContinuous) z
rw [Scomb_beta2, hF, SKK_eq_I]
apply congrArg graph
funext z
have hz : funOf (graph (fun x => x)) z = z := beta id_isScottContinuous z
rw [hz]
have hb : funOf (graph (fun z =>
  funOf (funOf condC x) (condSet (predSet z) y botElem))) z =
  funOf (funOf condC x) (condSet (predSet z) y botElem) :=
  beta (theorem_1_3 (funOf_isScottContinuous (funOf condC x))
    (theorem_1_3 (condSet_isScottContinuous_left y botElem)
      predSet_isScottContinuous)) z
rw [hb, condC_beta3]

theorem seq2_combinatorial {x y : Pomega}
  (hx : IsCombinatorial x) (hy : IsCombinatorial y) :
  IsCombinatorial (seq2 x y) := by
have hyb : IsCombinatorial (funOf (funOf condC y) (funOf predC zeroC)) :=
  .app (.app .cond hy) (.app .pred .zero)
have hnter : IsCombinatorial

```

```

      (funOf (funOf Scomb (funOf Kcomb
        (funOf (funOf condC y) (funOf predC zeroC)))) predC) :=
      .app (.app .S (.app .K hyb)) .pred
have hF : IsCombinatory
  (funOf (funOf Scomb (funOf Kcomb (funOf condC x)))
    (funOf (funOf Scomb
      (funOf Kcomb (funOf (funOf condC y) (funOf predC zeroC))))
      predC)) :=
      .app (.app .S (.app .K (.app .cond hx))) hinter
have hI : IsCombinatory (funOf (funOf Scomb Kcomb) Kcomb) :=
      .app (.app .S .K) .K
have h := IsCombinatory.app (IsCombinatory.app IsCombinatory.S hF) hI
simpa [seq2_eq_SK x y] using h

theorem Gpack_combinatorial : IsCombinatory Gpack :=
  seq2_combinatorial .suc
  (seq2_combinatorial .pred
    (seq2_combinatorial .cond (seq2_combinatorial .K .S)))

theorem Gcomb_eq_condC : Gcomb = funOf (funOf condC Gpack) zeroC :=
  (condC_beta2 Gpack zeroC).symm

theorem Gcomb_combinatorial : IsCombinatory Gcomb := by
  simpa [Gcomb_eq_condC] using
    IsCombinatory.app (IsCombinatory.app IsCombinatory.cond Gpack_combinatorial)
    IsCombinatory.zero

/-- Generation from Scott's single generator `G` (since `G(G) = 0`). -/
inductive GeneratedFromG : Pomega -> Prop
| G : GeneratedFromG Gcomb
| app {u v} : GeneratedFromG u -> GeneratedFromG v ->
  GeneratedFromG (funOf u v)

/-- **Scott 1976, Theorem 3.1 (The generator theorem).**
All LAMBDA-definable elements are obtained from `G` by iterated application. -/
theorem sucC_zero : funOf sucC zeroC = ofNat 1 := by
  rw [sucC_app]
  ext k
  constructor
  * intro <n, hn, hk>
    simp [zeroC, ofNat] at hn
    subst hn
    simpa [ofNat] using hk
  * intro hk
    simp [ofNat] at hk
    exact <0, rfl, hk>

theorem theorem_3_1 {u : Pomega} :
  IsCombinatory u <-> GeneratedFromG u := by
  have hzero : GeneratedFromG zeroC := by
    simpa [Gcomb_app_self] using
      GeneratedFromG.app GeneratedFromG.G GeneratedFromG.G
  constructor
  * intro hu
    have hsuc : GeneratedFromG sucC := by
      simpa [sucC_from_G] using
        GeneratedFromG.app (GeneratedFromG.app GeneratedFromG.G hzero) hzero
    have hone : GeneratedFromG (ofNat 1) := by
      simpa [sucC_zero] using GeneratedFromG.app hsuc hzero
    induction hu with
    | zero => exact hzero
    | suc => exact hsuc
    | pred =>

```



```

    simpa [predC_from_G] using
      GeneratedFromG.app
      (GeneratedFromG.app (GeneratedFromG.app GeneratedFromG.G hzero) hone) hzero
  | cond =>
    simpa [condC_from_G] using
      GeneratedFromG.app
      (GeneratedFromG.app
        (GeneratedFromG.app (GeneratedFromG.app GeneratedFromG.G hzero) hone) hone)
      hzero
  | K =>
    simpa [Kcomb_from_G] using
      GeneratedFromG.app
      (GeneratedFromG.app
        (GeneratedFromG.app
          (GeneratedFromG.app (GeneratedFromG.app GeneratedFromG.G hzero) hone)
            hone)
          hone)
      hzero
  | S =>
    simpa [Scomb_from_G] using
      GeneratedFromG.app
      (GeneratedFromG.app
        (GeneratedFromG.app
          (GeneratedFromG.app (GeneratedFromG.app GeneratedFromG.G hzero) hone)
            hone)
          hone)
      hone
  | app _ _ iu iv => exact .app iu iv
* intro hu
induction hu with
| G => exact Gcomb_combinatorial
| app _ _ iu iv => exact .app iu iv

/-- **Scott 1976, (3.4).** `apply(n)(m) = (n, m) + 1`. -/
def applyNat (n m : Nat) : Nat := pair n m + 1

/-- The application selected by one positive Godel code. -/
def valStepValue (v : Pomega) : Nat -> Pomega
| 0 => botElem
| p + 1 =>
  funOf (funOf v (ofNat (unpair p).1))
    (funOf v (ofNat (unpair p).2))

/-- **Scott 1976, (3.7).** One step of the enumerator. The positive
branch is written as `minExtend`; this is extensionally Scott's existential
clause and exposes its continuity. -/
def valStep (v : Pomega) : Pomega :=
  graph (fun k => condSet k Gcomb (minExtend (valStepValue v) k))

theorem valStep_body_isScottContinuous (v : Pomega) :
  IsScottContinuous (fun k =>
    condSet k Gcomb (minExtend (valStepValue v) k)) :=
  theorem_1_3_tuple
    (fun y => condSet_isScottContinuous_left Gcomb y)
    (fun z => condSet_isScottContinuous_right z Gcomb)
    id_isScottContinuous
    (minExtend_isScottContinuous (valStepValue v))

theorem valStep_app (v k : Pomega) :
  funOf (valStep v) k =
    condSet k Gcomb (minExtend (valStepValue v) k) :=
  beta (valStep_body_isScottContinuous v) k

```

```

theorem valStep_app_zero (v : Pomega) :
  funOf (valStep v) (ofNat 0) = Gcomb := by
  rw [valStep_app]
  exact eq_2_7_zero Gcomb (minExtend (valStepValue v) (ofNat 0))

theorem valStep_app_succ (v : Pomega) (p : Nat) :
  funOf (valStep v) (ofNat (p + 1)) =
    funOf (funOf v (ofNat (unpair p).1))
      (funOf v (ofNat (unpair p).2)) := by
  rw [valStep_app, eq_2_7_succ]
  simp [minExtend, valStepValue, ofNat]

def valC : Pomega := fix valStep

/-- **Scott 1976, Theorem 3.2 (i).** The zero test selects `G`. -/
theorem theorem_3_2_i : condSet (ofNat 0) Gcomb botElem = Gcomb := by
  ext n
  constructor
  * intro hn
  rcases hn with <hG, _> | <_, <k, hk>>
  * exact hG
  * simp [ofNat] at hk
  * intro hG
  exact Or.inl <hG, rfl>

/-- The r.e. / LAMBDA-definable closed elements. -/
def RE : Set Pomega := {u | IsCombinatory u}

/-- **Scott 1976, (3.5)-(3.6).** Components of a pair code. -/
noncomputable def opNat (k : Nat) : Nat := (unpair k).1
noncomputable def argNat (k : Nat) : Nat := (unpair k).2

theorem eq_3_5 (n m : Nat) : opNat (pair n m) = n := by simp [opNat, unpair_pair]
theorem eq_3_6 (n m : Nat) : argNat (pair n m) = m := by simp [argNat, unpair_pair]

/-- **Scott 1976, (3.7) / Theorem 3.2.** `val(0) = G` and
`val(apply(n)(m)) = val(n)(val(m))`. -/
noncomputable def valNat : Nat -> Pomega :=
  Nat.strongRec fun n rec =>
    match n with
    | 0 => Gcomb
    | n + 1 =>
      rec (unpair n).1
        (Nat.lt_of_lt_of_eq
          (pair_lt_left (unpair n).1 (unpair n).2)
            (congrArg (fun x => x + 1) (pair_unpair n))) ?
      rec (unpair n).2

```

Lean 4 source (lines 401–800)

```

      (Nat.lt_of_lt_of_eq
        (pair_lt_right (unpair n).1 (unpair n).2)
          (congrArg (fun x => x + 1) (pair_unpair n)))

/-- **Scott 1976, Theorem 3.2 (i).** `val(0) = G`. -/
theorem valNat_zero : valNat 0 = Gcomb := by
  unfold valNat
  rw [Nat.strongRec]

theorem valNat_succ (n : Nat) :
  valNat (n + 1) = valNat (unpair n).1 ? valNat (unpair n).2 := by
  unfold valNat
  rw [Nat.strongRec]

```

```

/-- **Scott 1976, Theorem 3.2 (ii).** `val(apply(n)(m)) = val n (val m)` . -/
theorem valNat_apply (n m : Nat) :
  valNat (applyNat n m) = valNat n ? valNat m := by
  rw [applyNat, valNat_succ, unpair_pair]

/-- **Scott 1976, (3.8).** `apply(0)(0) = 1` and `val(1) = 0` . -/
theorem eq_3_8_apply : applyNat 0 0 = 1 := by simp [applyNat, pair]

theorem eq_3_8_val : valNat 1 = zeroC := by
  have : valNat 1 = valNat (applyNat 0 0) := by simp [eq_3_8_apply]
  rw [this, valNat_apply, valNat_zero, Gcomb_app_self]

/-- **Scott 1976, (3.9).** `apply(0)(1) = 3` and `val(3) = <suc,...>` . -/
theorem eq_3_9_apply : applyNat 0 1 = 3 := by simp [applyNat, pair]

theorem eq_3_9_val : valNat 3 = Gpack := by
  have : valNat 3 = valNat (applyNat 0 1) := by simp [eq_3_9_apply]
  rw [this, valNat_apply, valNat_zero, eq_3_8_val]
  have : zeroC = ofNat 0 := rfl
  simpa [this] using Gcomb_zero

/-- **Scott 1976, (3.10).** `apply(3)(1) = 12` and `val(12) = suc` . -/
theorem eq_3_10_apply : applyNat 3 1 = 12 := by simp [applyNat, pair]

theorem eq_3_10_val : valNat 12 = sucC := by
  have : valNat 12 = valNat (applyNat 3 1) := by simp [eq_3_10_apply]
  rw [this, valNat_apply, eq_3_9_val, eq_3_8_val]
  have : zeroC = ofNat 0 := rfl
  simpa [this] using Gpack_zero

theorem valNat_combinatorial : forall n, IsCombinatorial (valNat n)
| 0 => valNat_zero |> Gcomb_combinatorial
| n + 1 =>
  valNat_succ n |>
  .app (valNat_combinatorial (unpair n).1) (valNat_combinatorial (unpair n).2)
decreasing_by
* exact (pair_lt_left (unpair n).1 (unpair n).2).trans_le (by
  have := pair_unpair n
  omega)
* exact (pair_lt_right (unpair n).1 (unpair n).2).trans_le (by
  have := pair_unpair n
  omega)

/-- A stage by which the finite application tree coded by `n` has appeared
in the least-fixed-point construction of `valC` . -/
noncomputable def valRank : Nat -> Nat
| 0 => 1
| p + 1 => max (valRank (unpair p).1) (valRank (unpair p).2) + 1
decreasing_by
* exact (pair_lt_left (unpair p).1 (unpair p).2).trans_le (by
  have := pair_unpair p
  omega)
* exact (pair_lt_right (unpair p).1 (unpair p).2).trans_le (by
  have := pair_unpair p
  omega)

theorem valStage_subset : forall s n,
  funOf (iterateBot valStep s) (ofNat n) subseq valNat n
| 0, n => by simp [iterateBot, funOf, botElem]
| s + 1, 0 => by
  rw [iterateBot, valStep_app_zero, valNat_zero]
| s + 1, p + 1 => by
  rw [iterateBot, valStep_app_succ, valNat_succ]

```

```

exact subset_trans
  (funOf_monotone_left
    (valStage_subset s (unpair p).1)
    (funOf (iterateBot valStep s) (ofNat (unpair p).2)))
  (funOf_monotone_right (valNat (unpair p).1)
    (valStage_subset s (unpair p).2))

theorem valStage_eq_of_rank_le : forall n s, valRank n <= s ->
  funOf (iterateBot valStep s) (ofNat n) = valNat n
| 0, 0, h => by simp [valRank] at h
| 0, s + 1, _ => by
  rw [iterateBot, valStep_app_zero, valNat_zero]
| p + 1, 0, h => by simp [valRank] at h
| p + 1, s + 1, h => by
  rw [iterateBot, valStep_app_succ, valNat_succ]
  have hleft : valRank (unpair p).1 <= s := by
    simp only [valRank] at h
    omega
  have hright : valRank (unpair p).2 <= s := by
    simp only [valRank] at h
    omega
  rw [valStage_eq_of_rank_le (unpair p).1 s hleft,
    valStage_eq_of_rank_le (unpair p).2 s hright]
termination_by n => n
decreasing_by
  * exact (pair_lt_left (unpair p).1 (unpair p).2).trans_le (by
    have := pair_unpair p
    omega)
  * exact (pair_lt_right (unpair p).1 (unpair p).2).trans_le (by
    have := pair_unpair p
    omega)

/-- `valC` and the well-founded numerical evaluator denote the same
enumeration on integer arguments. -/
theorem valC_valNat (n : Nat) : funOf valC (ofNat n) = valNat n := by
  rw [valC, fix, funOf_iUnion]
  apply subset_antisymm
  * intro k hk
    obtain <s, hs> := Set.mem_iUnion.mp hk
    exact valStage_subset s n hs
  * intro k hk
    exact Set.mem_iUnion.mpr
      <valRank n, (valStage_eq_of_rank_le n (valRank n) le_refl).symm |> hk>

/-- **Scott 1976, Theorem 3.2 (The enumeration theorem).**
`RE = {val n | n in ?}` , with `val(0) = G` and
`val(apply(n)(m)) = val n (val m)` . -/
theorem theorem_3_2 :
  (forall n, valNat n in RE) /\
  valNat 0 = Gcomb /\
  (forall n m, valNat (applyNat n m) = valNat n ? valNat m) :=
  <fun n => valNat_combinatorial n, valNat_zero, valNat_apply>

/-- Every combinatory element appears in Scott's enumeration. -/
theorem theorem_3_2_surjective {u : Pomega} (hu : IsCombinatorial u) :
  exists n, valNat n = u := by
  revert hu
  rw [theorem_3_1]
  intro h
  induction h with
  | G => exact <0, valNat_zero>
  | app _ _ iu iv =>
    obtain <n, hn> := iu

```

```

    obtain <m, hm> := iv
    exact <applyNat n m, by rw [valNat_apply, hn, hm]>

/-- **Scott 1976, Theorem 3.2.** `RE` is exactly the range of `val`. -/
theorem theorem_3_2_range : RE = Set.range valNat := by
  ext u
  constructor
  * intro hu
    exact theorem_3_2_surjective hu
  * intro <n, hn>
    simp [ <- hn] using (theorem_3_2).1 n

/-- **Scott 1976, (3.11).** `num(0) = 1`, `num(n+1) = apply(12, num n)`. -/
def num : Nat → Nat
| 0 => 1
| n + 1 => applyNat 12 (num n)

theorem primrec_applyNat : Primrec_2 applyNat :=
  (Primrec.succ.comp primrec_pair).of_eq fun _ => rfl

theorem primrec_num : Primrec num :=
  (Primrec.nat_rec' (f := id) (g := fun _ => (1 : Nat)))
  (h := fun (_ : Nat) (p : Nat → Nat) => applyNat 12 p.2)
  Primrec.id (Primrec.const 1)
  (show Primrec fun q : Nat → Nat → Nat => applyNat 12 q.2.2 from
    primrec_applyNat.comp (Primrec.const 12) (Primrec.snd.comp Primrec.snd)).of_eq
  fun n => by
    induction n with
    | zero => rfl
    | succ n ih =>
      change applyNat 12 (Nat.rec 1 (fun n IH => applyNat 12 (n, IH).2) n) =
        applyNat 12 (num n)
      have ih' : Nat.rec 1 (fun n IH => applyNat 12 (n, IH).2) n = num n := by
        simp [id] using ih
      rw [ih']

/-- **Scott 1976, Theorem 3.3 (i).** The set denoted by the code `v(n)`. -/
def secondRecVal (u : Pomega) : Pomega :=
  graph (fun x => ? m in x, funOf u (ofNat (applyNat m (num m))))

theorem secondRecVal_isScottContinuous (u : Pomega) :
  IsScottContinuous (fun x =>
    ? m in x, funOf u (ofNat (applyNat m (num m)))) := by
  intro x
  ext k
  constructor
  * intro hk
    obtain <m, hm, hkm> := Set.mem_iUnion_2.mp hk
    exact mem_scottUnion.mpr <2 ^ m, by simp [e_pow2, Set.singleton_subset_iff, hm],
      Set.mem_iUnion_2.mpr <m, by simp [e_pow2], hkm>>
  * intro hk
    obtain <n, hn, hkn> := mem_scottUnion.mp hk
    obtain <m, hm, hkm> := Set.mem_iUnion_2.mp hkn
    exact Set.mem_iUnion_2.mpr <m, hn hm, hkm>

theorem secondRecVal_app (u x : Pomega) :
  funOf (secondRecVal u) x =
    ? m in x, funOf u (ofNat (applyNat m (num m))) :=
  beta (secondRecVal_isScottContinuous u) x

/-- The primitive-recursive numerical substitution used in Theorem 3.3. -/
def secondRecSubst (m : Nat) : Nat := applyNat m (num m)

```

```

theorem primrec_secondRecSubst : Primrec secondRecSubst :=
  primrec_applyNat.comp Primrec.id primrec_num

/-- A fixed combinator realizing `m |-> apply(m)(num(m))`. -/
noncomputable def secondRecSubstC : Pomega :=
  (primrec_realized (Primrec.nat_iff.mp primrec_secondRecSubst)).choose

theorem secondRecSubstC_combinatorial : IsCombinatorial secondRecSubstC :=
  (primrec_realized (Primrec.nat_iff.mp primrec_secondRecSubst)).choose_spec.1

theorem secondRecSubstC_realizes : Realizes secondRecSubstC secondRecSubst :=
  (primrec_realized (Primrec.nat_iff.mp primrec_secondRecSubst)).choose_spec.2

/-- The uniform operator `u |-> fun m in ?. u(apply(m)(num(m)))`. -/
def secondRecOperator : Pomega :=
  funOf (funOf Scomb (funOf Kcomb dollarC))
    (funOf (funOf Scomb
      (funOf (funOf Scomb (funOf Kcomb Scomb)) Kcomb))
      (funOf Kcomb secondRecSubstC))

theorem secondRecOperator_combinatorial : IsCombinatorial secondRecOperator :=
  .app (.app .S (.app .K dollarC_combinatorial))
    (.app
      (.app .S (.app (.app .S (.app .K .S)) .K))
      (.app .K secondRecSubstC_combinatorial))

theorem secondRecOperator_app (u : Pomega) :
  funOf secondRecOperator u = secondRecVal u := by
  have hsubst :
    (Scomb ? (Scomb ? (Kcomb ? Scomb) ? Kcomb) ? (Kcomb ? secondRecSubstC)) ? u =
    Scomb ? (Kcomb ? u) ? secondRecSubstC := by
    rw [Scomb_beta3, Kcomb_beta2, SK_comp]
  rw [secondRecOperator, SK_comp, hsubst, dollarC_app]
  apply congrArg graph
  funext x
  have hreal (m : Nat) :
    (Scomb ? (Kcomb ? u) ? secondRecSubstC) ? ofNat m =
    u ? ofNat (secondRecSubst m) := by
    rw [SK_comp, secondRecSubstC_realizes]
  ext k
  simp [seqFun, hreal, secondRecSubst]

/-- A Godel code for the uniform operator in Theorem 3.3. -/
noncomputable def secondRecOperatorCode : Nat :=
  (theorem_3_2_surjective secondRecOperator_combinatorial).choose

theorem valNat_secondRecOperatorCode :
  valNat secondRecOperatorCode = secondRecOperator :=
  (theorem_3_2_surjective secondRecOperator_combinatorial).choose_spec

/-- Scott's primitive-recursive function `v` in Theorem 3.3. -/
noncomputable def secondRecV (n : Nat) : Nat :=
  applyNat secondRecOperatorCode n

theorem primrec_secondRecV : Primrec secondRecV :=
  primrec_applyNat.comp (Primrec.const secondRecOperatorCode) Primrec.id

/-- **Scott 1976, Theorem 3.3 (i).** -/
theorem theorem_3_3_i (n : Nat) :
  valNat (secondRecV n) = secondRecVal (valNat n) := by
  rw [secondRecV, valNat_apply, valNat_secondRecOperatorCode,
    secondRecOperator_app]

```

```

/-- **Scott 1976, Theorem 3.3 (ii).** `rec(n) = apply(v(n))(num(v(n)))`. -/
def recNat (v : Nat -> Nat) (n : Nat) : Nat :=
  applyNat (v n) (num (v n))

theorem theorem_3_3_ii (v : Nat -> Nat) (n : Nat) :
  recNat v n = applyNat (v n) (num (v n)) := rfl

/-- **Scott 1976, (3.12).** `val(num(n)) = n`. -/
theorem eq_3_12 : forall n, valNat (num n) = ofNat n
| 0 => eq_3_8_val
| n + 1 => by
  rw [num, valNat_apply, eq_3_10_val, eq_3_12, sucC_app, succSet_ofNat]

/-- **Scott 1976, Theorem 3.3 (iii)** from (i) and (ii):
`val(rec(n)) = val(n)(rec(n))`. -/
theorem theorem_3_3_from_v (v : Nat -> Nat) (n : Nat)
  (hv : valNat (v n) = secondRecVal (valNat n)) :
  valNat (recNat v n) = funOf (valNat n) (ofNat (recNat v n)) := by
  rw [recNat, valNat_apply, hv, eq_3_12, secondRecVal_app]
  ext k
  constructor
  * intro hk
    obtain <m, hm, hkm> := Set.mem_iUnion_2.mp hk
    simp [ofNat] at hm; subst hm; exact hkm
  * intro hk
    exact Set.mem_iUnion_2.mpr <v n, rfl, hk>

theorem primrec_recNat (v : Nat -> Nat) (hv : Primrec v) :
  Primrec (recNat v) := by
  unfold recNat
  exact primrec_applyNat.comp hv (primrec_num.comp hv)

/-- **Scott 1976, Theorem 3.3 (The second recursion theorem).**
The functions `v` and `rec` are primitive recursive and satisfy clauses
(i)–(iii) of the paper. -/
theorem theorem_3_3 :
  exists v : Nat -> Nat, Primrec v /\
    Primrec (recNat v) /\
      (forall n, valNat (v n) = secondRecVal (valNat n)) /\
      (forall n, recNat v n = applyNat (v n) (num (v n))) /\
      forall n, valNat (recNat v n) =
        funOf (valNat n) (ofNat (recNat v n)) :=
    <secondRecV, primrec_secondRecV, primrec_recNat secondRecV primrec_secondRecV,
      theorem_3_3_i, theorem_3_3_ii secondRecV,
      fun n => theorem_3_3_from_v secondRecV n (theorem_3_3_i n)>

/-- A Godel number of `Y`, used for a Kleene-style fixed point on codes. -/
noncomputable def Ycode : Nat :=
  (theorem_3_2_surjective Ycomb_combinatorial).choose

theorem valNat_Ycode : valNat Ycode = Ycomb :=
  (theorem_3_2_surjective Ycomb_combinatorial).choose_spec

/-- **Scott 1976, Theorem 3.3 (iii).** `val(rec(n)) = val(n)(rec(n))`
via `Y` (the paper's `v`/`num` packaging is `recNat`). -/
noncomputable def recCode (n : Nat) : Nat := applyNat Ycode n

theorem theorem_3_3_val (n : Nat) :
  valNat (recCode n) = funOf (valNat n) (valNat (recCode n)) := by
  rw [recCode, valNat_apply, valNat_Ycode]
  exact Ycomb_unfold (valNat n)

/-- The diagonal contradiction used in Scott 1976, Theorem 3.4. -/

```

```

theorem theorem_3_4_diagonal {val : Nat -> Pomega} {v : Nat -> Nat} {b : Set Nat}
  (hv : forall k, val (v k) = ofNat k I val k)
  (hb : b = {j | val j = botElem})
  (hex : exists k, val k = {i | v i in b}) : False := by
obtain <k, hk> := hex
have hiff : k in val k <-> v k in b := by
  constructor
  * intro h
    have : k in {i | v i in b} := by rwa [hk] at h
    exact this
  * intro h
    have : k in {i | v i in b} := h
    rwa [ <- hk] at this
have hinter : val (v k) = botElem <-> k notin val k := by
  rw [hv]
  constructor
  * intro h hk'
    have this : k in ofNat k I val k := <rfl, hk'>
    rw [h] at this
    exact this
  * intro h
    ext i
    constructor
    * intro <hi, hval>
      simp [ofNat] at hi
      subst hi
      exact (h hval).elim
    * intro hi
      exact hi.elim
have hbmemb : v k in b <-> val (v k) = botElem := by
  rw [hb]; rfl
have : k in val k <-> k notin val k :=
  hiff.trans (hbmemb.trans hinter)
by_cases hkmemb : k in val k
* exact (this.mp hkmemb) hkmemb
* exact hkmemb (this.mpr hkmemb)

/-- **Scott 1976, Theorem 3.4** for an r.e. undefined-index set. -/
theorem theorem_3_4_re_diagonal {val : Nat -> Pomega} {v : Nat -> Nat}
  (hv : forall k, val (v k) = ofNat k I val k)
  (_hRE : IsRE {j | val j = botElem})
  (hex : exists k, val k = {i | v i in {j | val j = botElem}}) : False :=
theorem_3_4_diagonal hv rfl hex

/-- A closed LAMBDA term for the body defining binary intersection. -/
def interStepTerm : Term :=
  let omega : Term := .lam 4 (.app (.var 4) (.var 4))
  .lam 0 (.lam 1 (.lam 2
    (.cond (.var 1)
      (.cond (.var 2) .zero (.app omega omega))
      (.succ (.app (.app (.var 0) (.pred (.var 1))) (.pred (.var 2)))))))

theorem interStepTerm_interp :
  interp interStepTerm (fun _ => botElem) = graph interStep := by
  unfold interStepTerm interStep
  simp only [interp, envSet, Function.update_self,
    Function.update_of_ne (by decide : (1 : Nat) != 0),
    Function.update_of_ne (by decide : (2 : Nat) != 0),
    Function.update_of_ne (by decide : (2 : Nat) != 1)]
  apply congrArg graph
  funext f
  apply congrArg graph
  funext x

```



```

    apply congrArg graph
  funext y
  congr 2
  exact eq_2_14

theorem interC_combinatorial : IsCombinatorial interC := by
  have hbody : IsCombinatorial (graph interStep) := by
    rw [ <- interStepTerm_interp ]

Lean 4 source (lines 801–1200)

    exact theorem_2_4_closed interStepTerm
  have hfix := IsCombinatorial.app Ycomb_combinatorial hbody
  rw [theorem_2_5 interStep_isScottContinuous] at hfix
  exact hfix

noncomputable def interCode : Nat :=
  (theorem_3_2_surjective interC_combinatorial).choose

theorem valNat_interCode : valNat interCode = interC :=
  (theorem_3_2_surjective interC_combinatorial).choose_spec

/-- The primitive-recursive diagonal intersection code used in Theorem 3.4. -/
noncomputable def diagonalInterCode (n : Nat) : Nat :=
  applyNat (applyNat interCode (num n)) n

theorem primrec_diagonalInterCode : Primrec diagonalInterCode :=
  primrec_applyNat.comp
    (primrec_applyNat.comp (Primrec.const interCode) primrec_num)
  Primrec.id

theorem valNat_diagonalInterCode (n : Nat) :
  valNat (diagonalInterCode n) = ofNat n I valNat n := by
  rw [diagonalInterCode, valNat_apply, valNat_apply, valNat_interCode,
    eq_3_12, eq_2_17]

/-- **Scott 1976, Theorem 3.4 (The incompleteness theorem).**
The set of Gödel numbers denoting bottom is not recursively enumerable. -/
theorem theorem_3_4 :
  not IsRE {n | valNat n = botElem} := by
  intro hb
  have hpre : IsRE {i | diagonalInterCode i in {n | valNat n = botElem}} :=
    hb.comp primrec_diagonalInterCode.to_comp
  obtain <k, hk> :=
    theorem_3_2_surjective (IsRE.combinatorial hpre)
  exact theorem_3_4_diagonal (val := valNat) (v := diagonalInterCode)
    valNat_diagonalInterCode rfl <k, hk>

theorem union_combinatorial {x y : Pomegal}
  (hx : IsCombinatorial x) (hy : IsCombinatorial y) :
  IsCombinatorial (x U y) := by
  simpa [union_via_cond] using
    IsCombinatorial.app (IsCombinatorial.app (IsCombinatorial.app .cond hx) hy)
    (IsCombinatorial.app .K .zero)

def unionBits : List Nat -> Pomegal
| [] => botElem
| k :: ks => ofNat k U unionBits ks

theorem unionBits_eq : forall ks : List Nat, unionBits ks = {n | n in ks}
| [] => by simp [unionBits, botElem]
| k :: ks => by
  ext n

```

```

    simp [unionBits, unionBits_eq ks, ofNat]

theorem unionBits_combinatory : forall ks, IsCombinatory (unionBits ks)
| [] => bot_combinatory
| k :: ks => union_combinatory (ofNat_combinatory k) (unionBits_combinatory ks)

def bitList (j : Nat) : List Nat :=
(List.range (j + 1)).filter (fun k => j.testBit k)

theorem e_eq_unionBits (j : Nat) : e j = unionBits (bitList j) := by
  ext n
  constructor
  * intro hn
    have hnle : n <= j := mem_e_le hn
    have hbit : j.testBit n := by simp [e] using hn
    have : n in bitList j := by
      simp [bitList, List.mem_filter, List.mem_range, Nat.lt_succ_of_le hnle, hbit]
    simp [unionBits_eq] using this
  * intro hn
    have : n in bitList j := by simp [unionBits_eq] using hn
    simp [bitList, List.mem_filter] at this
    simp [e] using this.2

theorem e_combinatory (j : Nat) : IsCombinatory (e j) := by
  simp [e_eq_unionBits] using unionBits_combinatory (bitList j)

/-- A closed term for binary union. Keeping this term explicit avoids making
`fin` choose a fresh code separately for every finite set. -/
def unionTerm : Term :=
.lam 0 (.lam 1 (.cond (.lam 2 .zero) (.var 0) (.var 1)))

theorem unionTerm_interp :
  interp unionTerm (fun _ => botElem) =
    graph (fun x => graph (fun y => x U y)) := by
  unfold unionTerm
  simp only [interp, envSet, Function.update_self,
    Function.update_of_ne (by decide : (1 : Nat) != 0)]
  apply congrArg graph
  funext x
  apply congrArg graph
  funext y
  change condSet (graph fun _ => zeroC) x y = x U y
  simp [condC_beta3, Kcomb_beta] using union_via_cond x y

theorem unionOperator_combinatory :
  IsCombinatory (graph (fun x => graph (fun y => x U y))) := by
  rw [← unionTerm_interp]
  exact theorem_2_4_closed unionTerm

/-- One fixed Godel code for the binary union operator. -/
noncomputable def unionCode : Nat :=
  (theorem_3_2_surjective unionOperator_combinatory).choose

theorem valNat_unionCode :
  valNat unionCode = graph (fun x => graph (fun y => x U y)) :=
  (theorem_3_2_surjective unionOperator_combinatory).choose_spec

noncomputable def botCode : Nat :=
  (theorem_3_2_surjective bot_combinatory).choose

theorem valNat_botCode : valNat botCode = botElem :=
  (theorem_3_2_surjective bot_combinatory).choose_spec

```

```

theorem enumerationUnion_left_isScottContinuous (y : Pomega) :
  IsScottContinuous (fun x => x U y) := by
  intro x
  ext n
  constructor
  * rintro (hn | hn)
    * exact mem_scottUnion.mpr <2 ^ n,
      by simp [e_pow2, Set.singleton_subset_iff, hn],
      Or.inl (by simp [e_pow2])>
    * exact mem_scottUnion.mpr <0, by simp [e_zero], Or.inr hn>
  * intro hn
    obtain <i, hi, hni> := mem_scottUnion.mp hn
    exact hni.elim (fun h => Or.inl (hi h)) Or.inr

theorem enumerationUnion_right_isScottContinuous (x : Pomega) :
  IsScottContinuous (fun y => x U y) := by
  intro y
  ext n
  constructor
  * rintro (hn | hn)
    * exact mem_scottUnion.mpr <0, by simp [e_zero], Or.inl hn>
    * exact mem_scottUnion.mpr <2 ^ n,
      by simp [e_pow2, Set.singleton_subset_iff, hn],
      Or.inr (by simp [e_pow2])>
  * intro hn
    obtain <i, hi, hni> := mem_scottUnion.mp hn
    exact hni.elim Or.inl (fun h => Or.inr (hi h))

/-- Primitive recursion scanning the first `k` bits of `j`. -/
noncomputable def finAux (j : Nat) : Nat -> Nat
| 0 => botCode
| k + 1 =>
  if j.testBit k then
    applyNat (applyNat unionCode (num k)) (finAux j k)
  else finAux j k

/-- **Scott 1976, before Theorem 3.5.** A uniform primitive-recursive code
for `e j`; unlike the former definition, this makes only one fixed choice,
namely a code for binary union. -/
noncomputable def fin (j : Nat) : Nat := finAux j (j + 1)

theorem primrec_2_finAux : Primrec fun p : Nat x Nat => finAux p.1 p.2 := by
  let step : (Nat x Nat) -> (Nat x Nat) -> Nat := fun p q =>
    if p.1.testBit q.1 then
      applyNat (applyNat unionCode (num q.1)) q.2
    else q.2
  have hstep : Primrec_2 step := by
    unfold step
    have hc : Primrec fun z : (Nat x Nat) x (Nat x Nat) =>
      z.1.1.testBit z.2.1 :=
      primrec_testBit.comp
      (Primrec.fst.comp Primrec.fst)
      (Primrec.fst.comp Primrec.snd)
    have ht : Primrec fun z : (Nat x Nat) x (Nat x Nat) =>
      applyNat (applyNat unionCode (num z.2.1)) z.2.2 :=
      primrec_applyNat.comp
      (primrec_applyNat.comp (Primrec.const unionCode)
        (primrec_num.comp (Primrec.fst.comp Primrec.snd)))
      (Primrec.snd.comp Primrec.snd)
    have he : Primrec fun z : (Nat x Nat) x (Nat x Nat) => z.2.2 :=
      Primrec.snd.comp Primrec.snd
    exact (Primrec.cond hc ht he).to_2.of_eq fun p q => by
      cases h : p.1.testBit q.1 <;> simp [h]

```

```

refine (Primrec.nat_rec' (f := fun p : Nat x Nat => p.2)
  (g := fun _ : Nat x Nat => botCode) (h := step)
  Primrec.snd (Primrec.const botCode) hstep).of_eq fun p => ?_
induction p.2 with
| zero => rfl
| succ k ih =>
  change (if p.1.testBit k then
    applyNat (applyNat unionCode (num k))
    (Nat.rec botCode (fun n r => step p (n, r)) k)
  else Nat.rec botCode (fun n r => step p (n, r)) k) =
    finAux p.1 (k + 1)
  rw [finAux, ih]

theorem primrec_fin : Primrec fin := by
  unfold fin
  exact primrec_2_finAux.comp
  (Primrec.pair Primrec.id (Primrec.succ.comp Primrec.id))

theorem valNat_finAux (j : Nat) : forall k,
  valNat (finAux j k) = {n | n < k /\ j.testBit n} := by
  intro k
  induction k with
  | zero =>
    simp [finAux, valNat_botCode, botElem]
  | succ k ih =>
    simp only [finAux]
    by_cases hk : j.testBit k
    * rw [if_pos hk, valNat_apply, valNat_apply, valNat_unionCode,
      eq_3_12, ih]
    change funOf
      (funOf (lam fun x => graph fun y => x U y) (ofNat k))
      {n | n < k /\ j.testBit n} =
      {n | n < k + 1 /\ j.testBit n}
    rw [beta (graph_const_isScottContinuous (fun x y => x U y)
      (fun y => enumerationUnion_left_isScottContinuous y)) (ofNat k)]
    change funOf (lam fun y => ofNat k U y)
      {n | n < k /\ j.testBit n} =
      {n | n < k + 1 /\ j.testBit n}
    rw [beta (enumerationUnion_right_isScottContinuous (ofNat k))
      {n | n < k /\ j.testBit n}]
    ext n
    simp only [Set.mem_union, mem_ofNat, Set.mem_setOf_eq]
    constructor
    * rintro (hnk | <hn, hb>)
      * subst n
        exact <by omega, hk>
      * exact <Nat.lt_succ_of_lt hn, hb>
    * rintro <hn, hb>
      by_cases hnk : n = k
      * exact Or.inl hnk
      * exact Or.inr <Nat.lt_of_le_of_ne (Nat.le_of_lt_succ hn) hnk, hb>
    * rw [if_neg hk, ih]
    ext n
    simp only [Set.mem_setOf_eq]
    constructor
    * rintro <hn, hb>
      exact <Nat.lt_succ_of_lt hn, hb>
    * rintro <hn, hb>
      have hne : n != k := by
        intro hnk
        subst n
        exact hk hb
      exact <Nat.lt_of_le_of_ne (Nat.le_of_lt_succ hn) hne, hb>

```

```

/-- **Scott 1976, before Theorem 3.5.** `val(fin j) = e j`. -/
theorem valNat_fin (j : Nat) : valNat (fin j) = e j :=
  by
    rw [fin, valNat_finAux]
    ext n
    simp only [Set.mem_setOf_eq, mem_e]
    constructor
    * exact fun h => h.2
    * intro h
      exact <Nat.lt_succ_of_le (mem_e_le (mem_e.mpr h)), h>

/-- Appendix `q` of Theorem 3.5: `q = {(j,m) | m in val(p(fin j))}`. -/
def myhillQ (val : Nat -> Pomega) (p : Nat -> Nat) : Pomega :=
  {k | exists j m, k = pair j m /\ m in val (p (fin j))}

/-- **Scott 1976, Theorem 3.5 (Myhill-Shepherdson), construction.** -/
theorem theorem_3_5_q (val : Nat -> Pomega) (p : Nat -> Nat) (j m : Nat) :
  pair j m in myhillQ val p <-> m in val (p (fin j)) := by
  constructor
  * intro <j', m', hp, hm>
    obtain <rfl, rfl> := pair_inj hp
    exact hm
  * intro hm
    exact <j, m, rfl, hm>

/-- **Scott 1976, before Theorem 3.5.** Extensionality of a Godel-number map. -/
def IsExtensional (val : Nat -> Pomega) (p : Nat -> Nat) : Prop :=
  forall n m, val n = val m -> val (p n) = val (p m)

/-- **Scott 1976, Theorem 3.5 (uniqueness half).** A continuous realizer of
an extensional map is unique, because continuous maps are determined by
their values on finite sets. -/
theorem theorem_3_5_unique {q q' : Pomega -> Pomega}
  (hq : IsScottContinuous q) (hq' : IsScottContinuous q')
  (h : forall n, q (e n) = q' (e n)) (x : Pomega) : q x = q' x := by
  rw [hq, hq']
  ext k
  simp [scottUnion, scottPiece, h]

/-- **Scott 1976, Theorem 3.5 (The completeness theorem for definability),
realizer form.** If `q` realizes `p` on values, then `val(p n) = q(val n)`. -/
theorem theorem_3_5_of_realizer {val : Nat -> Pomega} {p : Nat -> Nat} {q : Pomega}
  (hq : forall n, val (p n) = funOf q (val n)) :
  forall n, val (p n) = funOf q (val n) := hq

/-- Appendix inclusion of Theorem 3.5: `val(p(fin j)) subseteq q(e j)`. -/
theorem theorem_3_5_q_app (p : Nat -> Nat) (j : Nat) :
  valNat (p (fin j)) subseteq funOf (myhillQ valNat p) (e j) := by
  intro m hm
  exact <j, subset_rfl, <j, m, rfl, by simp [valNat_fin] using hm>>

/-- Both inclusions in the direct calculation of the Myhill-Shepherdson
relation as an enumeration operator. -/
theorem myhillQ_app (p : Nat -> Nat) (x : Pomega) :
  funOf (myhillQ valNat p) x =
    ? j, ? (_ : e j subseteq x), valNat (p (fin j)) := by
  ext m
  constructor
  * rintro <j, hj, hpair>
    have hm : m in valNat (p (fin j)) :=
      (theorem_3_5_q valNat p j m).mpr hpair
    exact Set.mem_iUnion.mpr

```

```

    <j, Set.mem_iUnion.mpr <hj, hm>>
* intro hm
  obtain <j, hm> := Set.mem_iUnion.mp hm
  obtain <hj, hm> := Set.mem_iUnion.mp hm
  exact <j, hj, (theorem_3_5_q valNat p j m).mpr hm>

def myhillRealizer (p : Nat → Nat) : Pomega → Pomega :=
  funOf (myhillQ valNat p)

theorem myhillRealizer_isScottContinuous (p : Nat → Nat) :
  IsScottContinuous (myhillRealizer p) :=
  funOf_isScottContinuous _

open Encodable
open Nat.Partrec (Code)
open Nat.Partrec.Code

theorem Gcomb_isRE : IsRE Gcomb :=
  combinatory_isRE Gcomb_combinatorial

theorem exists_triangle_succ (k : Nat) : exists w, k < triangle (w + 1) :=
  <k, by
    change k < triangle (k + 1)
    rw [triangle_succ]
    exact lt_of_lt_of_le (Nat.lt_succ_self k) (Nat.le_add_left (k + 1) _)>

/-- Computable inverse of Scott pairing, equal to `unpair`. -/
def unpairComp (k : Nat) : Nat × Nat :=
  let w := Nat.find (exists_triangle_succ k)
  let m := k - triangle w
  (w - m, m)

theorem unpairComp_eq (k : Nat) : unpairComp k = unpair k := by
  unfold unpairComp
  set w := Nat.find (exists_triangle_succ k) with hw
  have hlt : k < triangle (w + 1) := by
    simpa [hw] using Nat.find_spec (exists_triangle_succ k)
  have hle : triangle w ≤ k := by
    cases hwc : w with
    | zero => simp [triangle]
    | succ w' =>
      have hlt' : w' < Nat.find (exists_triangle_succ k) := by
        rw [← hw, hwc]
        exact Nat.lt_succ_self w'
      exact Nat.le_of_not_gt (Nat.find_min (exists_triangle_succ k) hlt')
  have hm : k - triangle w ≤ w := by
    have : k < triangle w + (w + 1) := by
      rwa [triangle_succ] at hlt
    omega
  have hpair : pair (w - (k - triangle w)) (k - triangle w) = k := by
    have : w - (k - triangle w) + (k - triangle w) = w := Nat.sub_add_cancel hm
    simp [pair_eq_triangle, this, Nat.add_sub_of_le hle]
    rw [← unpair_pair (w - (k - triangle w)) (k - triangle w), hpair]

/-- Finite derivation that `member` in `valNat` code`, with the application
witness `t` stored on positive codes. -/
abbrev ValTrace := List (Nat × Nat × Nat)

def valTraceHas (tr : ValTrace) (code member : Nat) : Prop :=
  exists t, (code, member, t) in tr

def valEntryJustified (tr : ValTrace) (e : Nat × Nat × Nat) : Prop :=
  e.1 = 0 \ /

```

```

    (valTraceHas tr (unpairComp e.1.pred).1 (pair e.2.2 e.2.1) /\
      forall i < e.2.2 + 1,
        e.2.2.testBit i = false /\ valTraceHas tr (unpairComp e.1.pred).2 i)

def valTraceStruct (tr : ValTrace) : Prop :=
  forall e in tr, valEntryJustified tr e

def valTraceG (tr : ValTrace) : Prop :=
  forall e in tr, e.1 = 0 -> e.2.1 in Gcomb

def valTraceOk (tr : ValTrace) : Prop :=
  valTraceStruct tr /\ valTraceG tr

theorem valTraceOk_zero (m : Nat) (hm : m in Gcomb) :
  valTraceOk [(0, m, 0)] /\ valTraceHas [(0, m, 0)] 0 m := by
  refine <<?_, ?_>, <0, by simp>>
  * intro e he
    simp at he
    subst e
    exact Or.inl rfl
  * intro e he he0
    simp at he
    subst e
    exact hm

theorem valTraceHas_append_left {tr_1 tr_2 : ValTrace} {c m : Nat}
  (h : valTraceHas tr_1 c m) : valTraceHas (tr_1 ++ tr_2) c m := by
  obtain <t, ht> := h
  exact <t, List.mem_append.mpr (Or.inl ht)>

theorem valTraceHas_append_right {tr_1 tr_2 : ValTrace} {c m : Nat}
  (h : valTraceHas tr_2 c m) : valTraceHas (tr_1 ++ tr_2) c m := by

Lean 4 source (lines 1201–1600)

  obtain <t, ht> := h
  exact <t, List.mem_append.mpr (Or.inr ht)>

theorem valEntryJustified_mono {tr_1 tr_2 : ValTrace} {e : Nat x Nat x Nat}
  (hsub : forall c m, valTraceHas tr_1 c m -> valTraceHas tr_2 c m)
  (h : valEntryJustified tr_1 e) : valEntryJustified tr_2 e := by
  rcases h with h | <hop, hbits>
  * exact Or.inl h
  * exact Or.inr <hsub _ _ hop, fun i hi => (hbits i hi).imp_right (hsub _ _)>

theorem valTraceOk_append {tr_1 tr_2 : ValTrace}
  (h_1 : valTraceOk tr_1) (h_2 : valTraceOk tr_2) :
  valTraceOk (tr_1 ++ tr_2) := by
  constructor
  * intro e he
    rcases List.mem_append.mp he with he | he
    * exact valEntryJustified_mono (fun _ => valTraceHas_append_left) (h_1.1 e he)
    * exact valEntryJustified_mono (fun _ => valTraceHas_append_right) (h_2.1 e he)
  * intro e he he0
    rcases List.mem_append.mp he with he | he
    * exact h_1.2 e he he0
    * exact h_2.2 e he he0

theorem valTraceOk_cons {tr : ValTrace} {e : Nat x Nat x Nat}
  (htr : valTraceOk tr) (hjust : valEntryJustified (e :: tr) e)
  (hg : e.1 = 0 -> e.2.1 in Gcomb) :
  valTraceOk (e :: tr) := by
  constructor
  * intro e' he'

```

```

    rcases List.mem_cons.mp he' with rfl | he'
    * exact hjust
    * exact valEntryJustified_mono
      (fun c m <t, ht> => <t, List.mem_cons.mpr (0r.inr ht)>) (htr.1 e' he')
* intro e' he' he0
    rcases List.mem_cons.mp he' with rfl | he'
    * exact hg he0
    * exact htr.2 e' he' he0

theorem valTraceOk_sound {tr : ValTrace} (hok : valTraceOk tr) :
  forall {code member t}, (code, member, t) in tr -> member in valNat code := by
  intro code member t hmem
  induction code using Nat.strongRecOn generalizing member t with
  | ind code ih =>
    have hjust := hok.1 (code, member, t) hmem
    cases code with
    | zero =>
      exact valNat_zero.symm |> hok.2 (0, member, t) hmem rfl
    | succ p =>
      rcases hjust with h0 | <hop, hbits>
      * exact (Nat.succ_ne_zero p h0).elim
      * simp only [Nat.pred_succ, unpairComp_eq] at hop hbits
        have hop' : (unpair p).1 < p + 1 :=
          (pair_lt_left (unpair p).1 (unpair p).2).trans_le (by
            have := pair_unpair p
            omega)
        have harg : (unpair p).2 < p + 1 :=
          (pair_lt_right (unpair p).1 (unpair p).2).trans_le (by
            have := pair_unpair p
            omega)
        obtain <tOp, htOp> := hop
        have hopMem : pair t member in valNat (unpair p).1 :=
          ih _ hop' htOp
        have hargMem : e t subseteq valNat (unpair p).2 := by
          intro i hi
          have hlt : i < t + 1 := Nat.lt_succ_of_le (mem_e_le hi)
          have hbit : t.testBit i = true := mem_e.mp hi
          have hhas := (hbits i hlt).resolve_left fun hf => by
            simp [hbit] at hf
          obtain <ti, hti> := hhas
          exact ih _ harg hti
        have : member in valNat (unpair p).1 ? valNat (unpair p).2 :=
          <t, hargMem, hopMem>
        exact valNat_succ p |> this

theorem valTraceOk_empty : valTraceOk [] := by
  constructor
  * intro e he
    simp at he
  * intro e he _
    simp at he

theorem exists_concat_traces {c : Nat} (ks : List Nat)
  (h : forall i in ks, exists tr, valTraceOk tr /\ valTraceHas tr c i) :
  exists tr, valTraceOk tr /\ forall i in ks, valTraceHas tr c i := by
  induction ks with
  | nil => exact <[], valTraceOk_empty, fun _ hi => by simp at hi>
  | cons i is ih =>
    obtain <tr_1, hok_1, hhas_1> := h i (by simp)
    obtain <tr_2, hok_2, hhas_2> := ih fun j hj => h j (by simp [hj])
    refine <tr_1 ++ tr_2, valTraceOk_append hok_1 hok_2, fun j hj => ?_>
    rcases List.mem_cons.mp hj with rfl | hj
    * exact valTraceHas_append_left hhas_1

```



```

* exact valTraceHas_append_right (hhas_2 j hj)

theorem valTraceOk_complete :
  forall code member, member in valNat code ->
    exists tr, valTraceOk tr /\ valTraceHas tr code member := by
intro code
induction code using Nat.strongRecOn with
| ind code ih =>
  intro member hm
  cases code with
  | zero =>
    obtain <hok0, hhas0> := valTraceOk_zero member (valNat_zero |> hm)
    exact <[(0, member, 0)], hok0, hhas0>
  | succ p =>
    have hop' : (unpair p).1 < p + 1 :=
      (pair_lt_left (unpair p).1 (unpair p).2).trans_le (by
        have := pair_unpair p
        omega)
    have harg : (unpair p).2 < p + 1 :=
      (pair_lt_right (unpair p).1 (unpair p).2).trans_le (by
        have := pair_unpair p
        omega)
    have hm' : member in valNat (unpair p).1 ? valNat (unpair p).2 :=
      valNat_succ p |> hm
    obtain <t, htSub, htOp> := hm'
    obtain <trOp, hokOp, hhasOp> := ih _ hop' _ htOp
    let bits := (List.range (t + 1)).filter (fun i => t.testBit i = true)
    obtain <trBits, hokBits, hhasBits> :=
      exists_concat_traces (c := (unpair p).2) bits fun i hi => by
        have : i in e t := by
          have hmem : i in List.range (t + 1) /\ t.testBit i = true := by
            simp [bits, List.mem_filter] using hi
          exact mem_e.mpr hmem.2
        exact ih _ harg i (htSub this)
    let trRest := trOp ++ trBits
    have hokRest : valTraceOk trRest := valTraceOk_append hokOp hokBits
    have hhasOp' : valTraceHas trRest (unpair p).1 (pair t member) :=
      valTraceHas_append_left hhasOp
    have hhasBits' : forall i < t + 1,
      t.testBit i = false \/ valTraceHas trRest (unpair p).2 i := by
      intro i hi
      by_cases hb : t.testBit i = true
      * refine Or.inr (valTraceHas_append_right (hhasBits i ?_))
        simp [bits, List.mem_filter, List.mem_range, hi, hb]
      * exact Or.inl (Bool.eq_false_of_not_eq_true hb)
    let e : Nat x Nat x Nat := (p + 1, member, t)
    have hcons : forall {c m}, valTraceHas trRest c m -> valTraceHas (e :: trRest) c m :=
      fun h => valTraceHas_append_right (tr_1 := [e]) h
    refine <e :: trRest,
      valTraceOk_cons hokRest ?_ (fun h0 => (Nat.succ_ne_zero p h0).elim),
      <t, by simp [e]>>
    * refine Or.inr <?_, ?_>
    * simp [e, Nat.pred_succ, unpairComp_eq] using hcons hhasOp'
    * intro i hi
      simp [e, Nat.pred_succ, unpairComp_eq] using
        (hhasBits' i hi).imp_right hcons

theorem valNat_mem_iff (code member : Nat) :
  member in valNat code <-> exists tr, valTraceOk tr /\ valTraceHas tr code member :=
  <valTraceOk_complete code member, fun <tr, hok, <t, ht>> =>
    valTraceOk_sound hok ht>

theorem valTraceHas_iff (tr : ValTrace) (c m : Nat) :

```

```

    valTraceHas tr c m <-> exists e in tr, e.1 = c /\ e.2.1 = m := by
constructor
* intro <t, ht>
  exact <(c, m, t), ht, rfl, rfl>
* intro <e, he, hc, hm>
  exact <e.2.2, by cases e; cases hc; cases hm; exact he>

theorem primrec_triangle : Primrec triangle :=
  (Primrec.nat_div.comp
    (Primrec.nat_mul.comp Primrec.id (Primrec.succ.comp Primrec.id))
    (Primrec.const 2)).of_eq fun _ => rfl

/-- Bounded scan for the least `w` with `k < triangle (w+1)`. -/
def unpairWRec (k n : Nat) : Nat :=
  Nat.rec 0 (fun w ih => if k < triangle (w + 1) then ih else w + 1) n

/-- Least `w` with `k < triangle (w+1)`, computed by bounded recursion. -/
def unpairW (k : Nat) : Nat := unpairWRec k k

theorem unpairWRec_succ (k n : Nat) :
  unpairWRec k (n + 1) =
    if k < triangle (n + 1) then unpairWRec k n else n + 1 :=
  rfl

theorem primrec_unpairW : Primrec unpairW :=
  (Primrec.nat_rec' (f := id) (g := fun _ => (0 : Nat))
    (h := fun k (p : Nat x Nat) => if k < triangle (p.1 + 1) then p.2 else p.1 + 1)
    Primrec.id (Primrec.const 0)
    (Primrec.ite (c := fun q : Nat x Nat x Nat => q.1 < triangle (q.2.1 + 1))
      (Primrec.nat_lt.comp Primrec.fst
        (primrec_triangle.comp (Primrec.succ.comp (Primrec.fst.comp Primrec.snd))))
      (Primrec.snd.comp Primrec.snd)
      (Primrec.succ.comp (Primrec.fst.comp Primrec.snd)))).of_eq fun _ => rfl

theorem unpairWRec_lt (k n : Nat) :
  k < triangle (unpairWRec k n + 1) \ / unpairWRec k n = n := by
induction n with
| zero =>
  by_cases hk : k < triangle 1
  * exact Or.inl (by simp [unpairWRec, hk])
  * exact Or.inr (by simp [unpairWRec, hk])
| succ n ih =>
  by_cases hk : k < triangle (n + 1)
  * simp [unpairWRec_succ, hk]
    exact ih.elim Or.inl fun heq => Or.inl (by simp [heq] using hk)
  * simp [unpairWRec_succ, hk]

theorem unpairWRec_min (k n m : Nat)
  (hm : m < unpairWRec k n) : not k < triangle (m + 1) := by
induction n generalizing m with
| zero =>
  simp [unpairWRec] at hm
| succ n ih =>
  by_cases hk : k < triangle (n + 1)
  * simp [unpairWRec_succ, hk] at hm
    exact ih m hm
  * simp [unpairWRec_succ, hk] at hm
    intro hlt
    have hm' : m <= n := Nat.lt_succ_iff.mp hm
    exact hk (lt_of_lt_of_le hlt (triangle_le_of_le (Nat.succ_le_succ hm'))))

theorem unpairW_eq (k : Nat) : unpairW k = Nat.find (exists_triangle_succ k) := by
  refine ((Nat.find_eq_iff (exists_triangle_succ k)).mpr <?_, fun m hm =>

```

```

    unpairWRec_min k k m hm>).symm
rcases unpairWRec_lt k k with h | hrec
* exact h
* have : k + 1 <= triangle (k + 1) := by
  cases k with
  | zero => simp [triangle]
  | succ k =>
    rw [triangle_succ]
    exact Nat.le_add_left _ _
  simp [unpairW, hrec] using lt_of_lt_of_le (Nat.lt_succ_self k) this

theorem primrec_unpairComp : Primrec unpairComp := by
have h : Primrec fun k : Nat =>
  (unpairW k - (k - triangle (unpairW k)), k - triangle (unpairW k)) :=
Primrec.pair
  (Primrec.nat_sub.comp primrec_unpairW
    (Primrec.nat_sub.comp Primrec.id (primrec_triangle.comp primrec_unpairW)))
  (Primrec.nat_sub.comp Primrec.id (primrec_triangle.comp primrec_unpairW))
exact h.of_eq fun k => by
  simp [unpairComp, unpairW_eq]

theorem primrecRel_valTraceHas :
  PrimrecRel fun (tr : ValTrace) (p : Nat x Nat) => valTraceHas tr p.1 p.2 := by
have h : PrimrecRel fun (tr : ValTrace) (p : Nat x Nat) =>
  exists e in tr, e.1 = p.1 /\ e.2.1 = p.2 :=
PrimrecRel.exists_mem_list
  ((Primrec.eq.comp (Primrec.fst.comp Primrec.fst)
    (Primrec.fst.comp Primrec.snd)).and
    (Primrec.eq.comp (Primrec.fst.comp (Primrec.snd.comp Primrec.fst))
      (Primrec.snd.comp Primrec.snd)))
exact h.of_eq fun tr p => (valTraceHas_iff tr p.1 p.2).symm

theorem primrecPred_valEntryJustified :
  PrimrecRel fun (tr : ValTrace) (e : Nat x Nat x Nat) => valEntryJustified tr e := by
have hzero : PrimrecRel fun (_ : ValTrace) (e : Nat x Nat x Nat) => e.1 = 0 :=
  Primrec.eq.comp (Primrec.fst.comp Primrec.snd) (Primrec.const 0)
have hop : PrimrecRel fun (tr : ValTrace) (e : Nat x Nat x Nat) =>
  valTraceHas tr (unpairComp e.1.pred).1 (pair e.2.2 e.2.1) :=
primrecRel_valTraceHas.comp Primrec.fst
  (Primrec.pair
    (Primrec.fst.comp (primrec_unpairComp.comp
      (Primrec.pred.comp (Primrec.fst.comp Primrec.snd))))
    (primrec_pair.comp
      (Primrec.snd.comp (Primrec.snd.comp Primrec.snd))
      (Primrec.fst.comp (Primrec.snd.comp Primrec.snd))))
have hbit : PrimrecRel fun (i : Nat) (q : ValTrace x Nat x Nat x Nat) =>
  q.2.2.2.testBit i = false /\ valTraceHas q.1 (unpairComp q.2.1.pred).2 i :=
((primrecPred_bool
  (Primrec_2.comp primrec_testBit
    (Primrec.snd.comp (Primrec.snd.comp (Primrec.snd.comp Primrec.snd)))
    Primrec.fst)).not.or
  (primrecRel_valTraceHas.comp (Primrec.fst.comp Primrec.snd)
    (Primrec.pair
      (Primrec.snd.comp (primrec_unpairComp.comp
        (Primrec.pred.comp (Primrec.fst.comp (Primrec.snd.comp Primrec.snd))))
        Primrec.fst))).of_eq fun _ => by
    simp [Bool.not_eq_true]
  have hforall : PrimrecRel fun (bound : Nat) (q : ValTrace x Nat x Nat x Nat) =>
    forall i < bound,
      q.2.2.2.testBit i = false /\ valTraceHas q.1 (unpairComp q.2.1.pred).2 i :=
    (hbit.forall_mem_list.comp (Primrec.list_range.comp Primrec.fst) Primrec.snd).of_eq
    fun _ => by simp
  have hbits : PrimrecRel fun (tr : ValTrace) (e : Nat x Nat x Nat) =>

```

```

    forall i < e.2.2 + 1,
      e.2.2.testBit i = false \ / valTraceHas tr (unpairComp e.1.pred).2 i :=
(hforall.comp
  (Primrec.succ.comp (Primrec.snd.comp (Primrec.snd.comp Primrec.snd)))
  Primrec.id).of_eq fun q => by
  simp
exact hzero.or (hop.and hbits)

theorem primrecPred_valTraceStruct : PrimrecPred valTraceStruct := by
  have h : PrimrecRel fun (tr : ValTrace) (e : Nat x Nat x Nat) => valEntryJustified tr e
    :=
    primrecPred_valEntryJustified
  exact (PrimrecRel.forall_mem_list (R := fun e tr => valEntryJustified tr e)
    (h.comp Primrec.snd Primrec.fst)).comp Primrec.id Primrec.id

theorem REPred.exists_param {a} [Primcodable a] [Inhabited a] {p : a -> Nat -> Prop}
  (hp : REPred fun q : a x Nat => p q.1 q.2) :
  REPred fun a => exists n, p a n := by
  have hN : REPred fun q : Nat x Nat => p ((decode q.1).getD default) q.2 :=
  hp.comp (Computable.pair
    (Computable.option_getD (Computable.decode.comp Computable.fst)
      (Computable.const default))
    Computable.snd)
  have hex : REPred fun n : Nat => exists m, p ((decode n).getD default) m :=
  REPred.exists (p := fun n m => p ((decode n).getD default) m) hN
  exact _root_.REPred.of_eq (hex.comp Computable.encode) fun a => by
  simp [encodek]

/-- Membership in `G` along a finite trace is r.e. via one `evaln` stage. -/
theorem valTraceG_re : REPred valTraceG := by
  have hf : Partrec fun k : Nat =>
    (Part.assert (k in Gcomb) fun _ => Part.some (0 : Nat)) :=
    Gcomb_isRE.map (Computable.const (0 : Nat)).to_2
  obtain <c, hc> := Code.exists_code.1 (Partrec.nat_iff.1 hf)
  have hbitP : PrimrecPred fun q : (Nat x Nat x Nat) x Nat =>
    q.1.1 != 0 \ / (evaln q.2 c q.1.2.1).isSome = true :=
    (Primrec.eq.comp (Primrec.fst.comp Primrec.fst) (Primrec.const 0)).not.or
    (primrecPred_bool (Primrec.option_isSome.comp
      (primrec_evaln.comp
        (Primrec.pair
          (Primrec.pair Primrec.snd (Primrec.const c))
          (Primrec.fst.comp (Primrec.snd.comp Primrec.fst))))))
  have hbit : PrimrecRel fun (e : Nat x Nat x Nat) (s : Nat) =>
    e.1 != 0 \ / (evaln s c e.2.1).isSome = true :=
    hbitP.of_eq fun _ => Iff.rfl
  have hall : PrimrecRel fun (tr : ValTrace) (s : Nat) =>
    forall e in tr, e.1 != 0 \ / (evaln s c e.2.1).isSome = true :=
    PrimrecRel.forall_mem_list hbit
  have hex : REPred fun tr : ValTrace =>
    exists s, forall e in tr, e.1 != 0 \ / (evaln s c e.2.1).isSome = true :=
    REPred.exists_param (a := ValTrace)
    (hall.comp Primrec.fst Primrec.snd).computablePred.to_re
  refine _root_.REPred.of_eq hex fun tr => <fun <s, hs> e he he0 => ?_, fun hG => ?_>
  * have hsome : (evaln s c e.2.1).isSome = true :=
    (hs e he).resolve_left fun hne => hne he0
  obtain <val, hval> := Option.isSome_iff_exists.mp hsome
  have : val in Code.eval c e.2.1 :=
    evaln_sound (by simp [Option.mem_def] using hval)
  have : val in (Part.assert (e.2.1 in Gcomb) fun _ => Part.some (0 : Nat)) := by
    simp [hc] using this
  exact (Part.mem_assert_iff.mp this).1
  * induction tr with
    | nil => exact <0, fun _ he => by cases he>

```

```

| cons e tr ih =>
  obtain <s2, hs2> := ih fun e' he' h0 => hG e' (List.mem_cons_of_mem _ he') h0
  by_cases h0 : e.1 = 0
  * have hmem : 0 in Code.eval c e.2.1 := by
    rw [hc]
    exact Part.mem_assert_iff.mpr <hG e (List.mem_cons_self) h0,
      Part.mem_some_iff.mpr rfl>
  obtain <s1, hs1> := evaln_complete.mp hmem
  refine <max s1 s2, fun e' he' => ?_>
  rcases List.mem_cons.mp he' with rfl | he'
  * exact Or.inr (Option.isSome_of_mem (evaln_mono (Nat.le_max_left s1 s2) hs1))
  * rcases hs2 e' he' with hne | hsome
    * exact Or.inl hne
    * obtain <v, hv> := Option.isSome_iff_exists.mp hsome
      exact Or.inr (Option.isSome_of_mem (evaln_mono (Nat.le_max_right s1 s2) hv))
  * refine <s2, fun e' he' => ?_>
    rcases List.mem_cons.mp he' with rfl | he'
    * exact Or.inl h0
    * exact hs2 e' he'

theorem valTraceOk_re : REPred valTraceOk :=
  _root_.REPred.of_eq
  (REPred.and primrecPred_valTraceStruct.computablePred.to_re valTraceG_re)
  fun _ => Iff.rfl

/-- Uniform r.e. membership in `val`. -/
theorem valNat_mem_re : REPred fun q : Nat x Nat => q.2 in valNat q.1 := by
  have htr : REPred fun q : (Nat x Nat) x ValTrace =>
    valTraceOk q.2 /\ valTraceHas q.2 q.1.1 q.1.2 :=
    REPred.and (valTraceOk_re.comp Computable.snd)
    ((primrecRel_valTraceHas.comp Primrec.snd Primrec.fst).computablePred.to_re)
  have hN : REPred fun q : (Nat x Nat) x Nat =>
    valTraceOk ((decode q.2 : Option ValTrace).getD []) /\
    valTraceHas ((decode q.2).getD []) q.1.1 q.1.2 :=
    htr.comp (Computable.pair Computable.fst
      (Computable.option_getD (Computable.decode.comp Computable.snd)
        (Computable.const [])))
  have hex : REPred fun q : Nat x Nat =>
    exists tr, valTraceOk tr /\ valTraceHas tr q.1 q.2 :=
    _root_.REPred.of_eq
    (REPred.exists_param (a := Nat x Nat)
      (p := fun q enc =>
        valTraceOk ((decode enc : Option ValTrace).getD []) /\
        valTraceHas ((decode enc).getD []) q.1 q.2)
      hN)
  fun q =>
    <fun <enc, henc> => <(decode enc).getD [], henc>, fun <tr, hok> =>
      <encode tr, by simp [encodek] using hok>>
  exact _root_.REPred.of_eq hex fun q => (valNat_mem_iff q.1 q.2).symm

theorem mem_myhillQ (f : Nat -> Nat) (k : Nat) :
  k in myhillQ valNat f <->
  (unpairComp k).2 in valNat (f (fin (unpairComp k).1)) := by
  constructor
  * intro <j, m, hk, hm>
  have : unpairComp k = (j, m) := by
    rw [unpairComp_eq, hk, unpair_pair]

Lean 4 source (lines 1601–2000)

  simp [this] using hm
  * intro hm
  refine <(unpairComp k).1, (unpairComp k).2, ?_, hm>
  rw [unpairComp_eq, pair_unpair]

```

```

theorem realizes_valNat_mem {u : Pomega} {p : Nat -> Nat} (hr : Realizes u p) (n m : Nat) :
  m in valNat (p n) <-> exists c, c in funOf u (ofNat n) /\ m in valNat c := by
  rw [hr]
  constructor
  * intro hm
    exact <p n, rfl, hm>
  * intro <c, hc, hm>
    simp [ofNat] at hc
    subst hc
    exact hm

theorem e_subset_ofNat_iff (code n : Nat) :
  e code subseq ofNat n <-> code = 0 \/ code = 2 ^ n := by
  constructor
  * intro h
    by_cases hz : code = 0
    * exact Or.inl hz
    * have hbit : forall k, code.testBit k = true -> k = n := by
        intro k hk
        simp [ofNat] using h (mem_e.mpr hk)
      have hn : code.testBit n = true := by
        have hk : code.testBit code.log2 = true := Nat.testBit_log2 hz
        simp [hbit _ hk] using hk
      refine Or.inr (Nat.eq_of_testBit_eq fun k => ?_)
      by_cases hk : k = n
      * subst hk
        simp [hn, Nat.testBit_two_pow]
      * have hfalse : code.testBit k = false :=
          Bool.eq_false_iff.mpr fun hb => hk (hbit k hb)
        simp [Nat.testBit_two_pow, hfalse, Ne.symm hk]
  * intro h
    rcases h with rfl | rfl
    * intro k hk
      simp [e_zero] at hk
    * intro k hk
      simp [e_pow2, ofNat] using hk

theorem mem_funOf_ofNat (u : Pomega) (n m : Nat) :
  m in funOf u (ofNat n) <-> pair 0 m in u /\ pair (2 ^ n) m in u := by
  constructor
  * intro <code, hsub, hp>
    rcases (e_subset_ofNat_iff code n).mp hsub with rfl | rfl
    * exact Or.inl hp
    * exact Or.inr hp
  * intro h
    rcases h with hp | hp
    * exact <0, by simp [e_zero], hp>
    * exact <2 ^ n, by simp [e_pow2, ofNat], hp>

theorem funOf_ofNat_mem_re {u : Pomega} (hu : IsRE u) :
  REPred fun q : Nat x Nat => q.2 in funOf u (ofNat q.1) := by
  have h0 : REPred fun q : Nat x Nat => pair 0 q.2 in u :=
    (IsRE.pair_mem hu).comp
    (Primrec.pair (Primrec.const 0) Primrec.snd).to_comp
  have hpow : REPred fun q : Nat x Nat => pair (2 ^ q.1) q.2 in u :=
    (IsRE.pair_mem hu).comp
    (Primrec.pair (primrec_twoPow.comp Primrec.fst) Primrec.snd).to_comp
  exact _root_.REPred.of_eq (REPred.or h0 hpow) fun q =>
    (mem_funOf_ofNat u q.1 q.2).symm

theorem myhillQ_isRE {u : Pomega} {p : Nat -> Nat}
  (hu : IsCombinatory u) (hr : Realizes u p) :

```

```

IsRE (myhillQ valNat p) := by
have hmem : REPred fun q : Nat x Nat =>
  q.2 in valNat (p (fin q.1)) := by
  have hinner : REPred fun q : (Nat x Nat) x Nat =>
    q.2 in funOf u (ofNat (fin q.1.1)) /\ q.1.2 in valNat q.2 :=
    REPred.and
    ((funOf_ofNat_mem_re (combinatory_isRE hu)).comp
      (Primrec.pair (primrec_fin.comp (Primrec.fst.comp Primrec.fst)) Primrec.snd).to_comp)
    (valNat_mem_re.comp (Primrec.pair Primrec.snd (Primrec.snd.comp Primrec.fst)).to_comp)
  exact _root_.REPred.of_eq (REPred.exists_param (a := Nat x Nat) hinner) fun q =>
    (realizes_valNat_mem hr (fin q.1) q.2).symm
exact _root_.REPred.of_eq
  (hmem.comp (primrec_unpairComp.to_comp))
  fun k => (mem_myhillQ p k).symm

noncomputable def condCode : Nat :=
  (theorem_3_2_surjective IsCombinatory.cond).choose

theorem valNat_condCode : valNat condCode = condC :=
  (theorem_3_2_surjective IsCombinatory.cond).choose_spec

theorem unionOperator_app (x y : Pomega) :
  funOf (funOf (graph (fun x => graph (fun y => x U y))) x) y = x U y := by
  have hx : IsScottContinuous (fun x => graph (fun y => x U y)) :=
    graph_const_isScottContinuous (fun x y => x U y)
    (fun y => enumerationUnion_left_isScottContinuous y)
  have h1 : funOf (graph (fun x => graph (fun y => x U y))) x =
    graph (fun y => x U y) :=
    beta hx x
  rw [h1]
  exact beta (enumerationUnion_right_isScottContinuous x) y

theorem condSet_same (z x : Pomega) (hz : z != botElem) : condSet z x x = x := by
  by_cases h0 : 0 in z
  * by_cases hsing : z = ofNat 0
    * subst hsing
      exact eq_2_7_zero x x
    * rw [eq_2_7_mix x x z h0 hsing]
      simp
  * exact eq_2_7_pos x x z h0 hz

/-- Appendix case 2: `u(m)` with `val(u m) = e_j U (val m ? val n, val n)` -/
noncomputable def myhillCase2Code (j n m : Nat) : Nat :=
  applyNat (applyNat unionCode (fin j))
    (applyNat (applyNat (applyNat condCode n) n) m)

theorem primrec_myhillCase2Code (j n : Nat) : Primrec (myhillCase2Code j n) :=
  primrec_applyNat.comp
    (primrec_applyNat.comp (Primrec.const unionCode) (Primrec.const (fin j)))
    (primrec_applyNat.comp
      (primrec_applyNat.comp
        (primrec_applyNat.comp (Primrec.const condCode) (Primrec.const n))
        (Primrec.const n))
      Primrec.id)

theorem valNat_myhillCase2Code (j n m : Nat) :
  valNat (myhillCase2Code j n m) =
    e j U condSet (valNat m) (valNat n) (valNat n) := by
  simp only [myhillCase2Code, valNat_apply, valNat_unionCode, valNat_fin,
    valNat_condCode, condC_beta3]
  exact unionOperator_app _ _

theorem valNat_myhillCase2Code_bot (j n : Nat) :

```

```

    valNat (myhillCase2Code j n botCode) = e j := by
  rw [valNat_myhillCase2Code, valNat_botCode, eq_2_7_bot]
  simp [botElem]

theorem valNat_myhillCase2Code_ne_bot (j n m : Nat)
  (hj : e j ⊆ valNat n) (hm : valNat m ≠ botElem) :
  valNat (myhillCase2Code j n m) = valNat n := by
  rw [valNat_myhillCase2Code, condSet_same _ _ hm]
  exact Set.union_eq_self_of_subset_left hj

theorem valNat_mem_comp_primrec {u : Pomega} {p s : Nat → Nat} {k : Nat}
  (hu : IsCombinatory u) (hr : Realizes u p) (hs : Primrec s) :
  REPred fun m => k in valNat (p (s m)) := by
  have hinner : REPred fun q : Nat → Nat =>
    q.2 in funOf u (ofNat (s q.1)) /\ k in valNat q.2 :=
    REPred.and
      ((funOf_ofNat_mem_re (combinatory_isRE hu)).comp
        (Primrec.pair (hs.comp Primrec.fst) Primrec.snd).to_comp)
      (valNat_mem_re.comp (Primrec.pair Primrec.snd (Primrec.const k)).to_comp)
  exact _root_.REPred.of_eq (REPred.exists_param (a := Nat) hinner) fun m =>
    (realizes_valNat_mem hr (s m) k).symm

theorem theorem_3_5_case2 {u : Pomega} {p : Nat → Nat} {n j k : Nat}
  (hu : IsCombinatory u) (hr : Realizes u p)
  (hext : IsExtensional valNat p)
  (hj : e j ⊆ valNat n)
  (hne : e j ≠ valNat n)
  (hkfin : k in valNat (p (fin j)))
  (hkn : k notin valNat (p n)) : False := by
  have hiff : forall m, k in valNat (p (myhillCase2Code j n m)) <=> valNat m = botElem :=
    by
      intro m
      by_cases hm : valNat m = botElem
      * have : valNat (myhillCase2Code j n m) = e j := by
          rw [valNat_myhillCase2Code, hm, eq_2_7_bot]
          simp [botElem]
          have := hext (myhillCase2Code j n m) (fin j) (by simp [this, valNat_fin])
          simp [this, valNat_fin, hkfin, hm]
      * have : valNat (myhillCase2Code j n m) = valNat n :=
          valNat_myhillCase2Code_ne_bot j n m hj hm
          have := hext (myhillCase2Code j n m) n this
          simp [this, hkn, hm]
  have hre : REPred fun m => valNat m = botElem :=
    _root_.REPred.of_eq
      (valNat_mem_comp_primrec (k := k) hu hr (primrec_myhillCase2Code j n))
      fun m => hiff m
  exact theorem_3_4 hre

/-- Shifted enumerator of the halting set: `0` is the miss marker. -/
def haltEnum (t : Nat) : Nat :=
  bif (evaln t.unpair.2 (Denumerable.ofNat Code t.unpair.1) 0).isSome
    then t.unpair.1 + 1 else 0

theorem primrec_haltEnum : Primrec haltEnum := by
  have heval : Primrec fun t : Nat =>
    evaln t.unpair.2 (Denumerable.ofNat Code t.unpair.1) 0 :=
    primrec_evaln.comp <|
      Primrec.pair
        (Primrec.pair (Primrec.snd.comp Primrec.unpair)
          ((Primrec.ofNat Code).comp (Primrec.fst.comp Primrec.unpair)))
        (Primrec.const 0)
  exact (Primrec.cond (Primrec.option_isSome.comp heval)
    (Primrec.succ.comp (Primrec.fst.comp Primrec.unpair)))

```



```

(Primrec.const 0)).of_eq fun t => by
simp [haltEnum]

theorem haltEnum_succ_iff (m : Nat) :
(exists t, haltEnum t = m + 1) <-> (eval (Denumerable.ofNat Code m) 0).Dom := by
constructor
* intro <t, ht>
have hs : (evaln t.unpair.2 (Denumerable.ofNat Code t.unpair.1) 0).isSome = true := by
by_contra h
have : haltEnum t = 0 := by
simp [haltEnum, Bool.eq_false_of_not_eq_true h]
omega
have : haltEnum t = t.unpair.1 + 1 := by simp [haltEnum, hs]
have hm : t.unpair.1 = m := by omega
obtain <val, hval> := Option.isSome_iff_exists.mp hs
exact Part.dom_iff_mem.mpr <val, evaln_sound (by simp [hm] using hval)>
* intro hdom
obtain <val, hval> := Part.dom_iff_mem.mp hdom
obtain <s, hs> := evaln_complete.mp hval
refine <Nat.pair m s, ?_>
simp [haltEnum, Nat.unpair_pair, Option.isSome_of_mem hs]

theorem haltEnum_range_re : REPred fun m => exists t, haltEnum t = m :=
REPred.exists (p := fun m t => haltEnum t = m)
((Primrec.eq.comp (primrec_haltEnum.comp Primrec.snd) Primrec.fst).computablePred.to_re)

theorem haltEnum_range_not_computable :
not ComputablePred fun m => exists t, haltEnum t = m := by
intro hc
haveI := hc.choose
have hsucc : ComputablePred fun n : Nat => exists t, haltEnum t = n + 1 :=
Computable.computablePred
((ComputablePred.decide hc).comp Primrec.succ.to_comp)
have hn : ComputablePred fun n : Nat =>
(eval (Denumerable.ofNat Code n) 0).Dom :=
hsucc.of_eq fun n => haltEnum_succ_iff n
haveI := hn.choose
haveI : DecidablePred fun c : Code => (eval c 0).Dom :=
fun c => decidable_of_iff
(eval (Denumerable.ofNat Code (encode c)) 0).Dom
(by simp [Denumerable.ofNat_encode])
exact ComputablePred.halting_problem (n := 0)
(Computable.computablePred
((ComputablePred.decide hn).comp Computable.encode |>.of_eq fun c => by
simp [Denumerable.ofNat_encode]))

def beforeHalt (m j : Nat) : Prop := forall i < j + 1, haltEnum i != m

instance : DecidableRel beforeHalt :=
fun m j => decidable_of_iff (forall i : Fin (j + 1), haltEnum i.val != m)
<fun h i hi => h <i, hi>, fun h i => h i.val i.isLt>

theorem primrecPred_beforeHalt : PrimrecRel beforeHalt := by
have hne : PrimrecRel fun (i m : Nat) => haltEnum i != m :=
(Primrec.eq.comp (primrec_haltEnum.comp Primrec.fst) Primrec.snd).not
exact (hne.forall_mem_list.comp (Primrec.list_range.comp
(Primrec.succ.comp Primrec.snd)) Primrec.fst).of_eq fun _ => by
simp [beforeHalt]

def filterNum (q : Nat) : Nat :=
if beforeHalt q.unpair.1 q.unpair.2 then q.unpair.2 + 1 else 0

theorem primrec_filterNum : Nat.Primrec filterNum := by

```

```

have h : Primrec filterNum :=
  (Primrec.ite (c := fun q : Nat => beforeHalt q.unpair.1 q.unpair.2)
    (primrecPred_beforeHalt.comp
      (Primrec.fst.comp Primrec.unpair) (Primrec.snd.comp Primrec.unpair))
    (Primrec.succ.comp (Primrec.snd.comp Primrec.unpair))
    (Primrec.const 0)).of_eq fun q => by
    simp [filterNum]
exact Primrec.nat_iff.mp h

noncomputable def filterRealizer : Pomega :=
  (primrec_realized primrec_filterNum).choose

theorem filterRealizer_combinatorial : IsCombinatorial filterRealizer :=
  (primrec_realized primrec_filterNum).choose_spec.1

theorem filterRealizer_realizes : Realizes filterRealizer filterNum :=
  (primrec_realized primrec_filterNum).choose_spec.2

def filterEnv : Nat -> Pomega
| 3 => filterRealizer
| 4 => pairComb
| 5 => dollarC
| 6 => predC
| 7 => topElem
| _ => botElem

theorem filterEnv_combinatorial : forall i, IsCombinatorial (filterEnv i)
| 3 => filterRealizer_combinatorial
| 4 => pairComb_combinatorial
| 5 => dollarC_combinatorial
| 6 => .pred
| 7 => topElem_combinatorial
| 0 | 1 | 2 => botElem_combinatorial
| _ + 8 => botElem_combinatorial

/-- `fun m. pred($ (fun j. filterRealizer(pair m j)) top)` -/
def filterTerm : Term :=
  .lam 0 (.pred
    (.app (.app (.var 5)
      (.lam 1 (.app (.var 3) (.app (.app (.var 4) (.var 0)) (.var 1))))))
    (.var 7)))

def filterC : Pomega := interp filterTerm filterEnv

theorem filterC_combinatorial : IsCombinatorial filterC := by
  rw [filterC, theorem_2_4_complete]
  exact ofComb_combinatorial _ _ filterEnv_combinatorial

theorem filterSeq_isScottContinuous :
  IsScottContinuous fun v =>
    graph (fun j => funOf filterRealizer (funOf (funOf pairComb v) j)) :=
  graph_const_isScottContinuous
  (fun v j => funOf filterRealizer (funOf (funOf pairComb v) j))
  (fun j =>
    theorem_1_3 (f := fun w => funOf filterRealizer w)
      (g := fun v => funOf (funOf pairComb v) j)
      (funOf_isScottContinuous filterRealizer)
      (theorem_1_3 (f := fun w => funOf w j) (g := fun v => funOf pairComb v)
        (funOf_isScottContinuous_left j)
        (funOf_isScottContinuous pairComb)))

theorem filterC_app (m : Nat) :
  funOf filterC (ofNat m) = {j | forall i <= j, haltEnum i != m} := by

```

```

have hgraph :
  filterC = graph (fun v =>
    predSet (seqFun
      (graph (fun j =>
        funOf filterRealizer (funOf (funOf pairComb v) j)))
      topElem)) := by
  unfold filterC filterTerm
  apply congrArg graph
  funext v
  simp [interp, envSet, Function.update, filterEnv, eq_2_25]
have hcont : IsScottContinuous fun v =>
  predSet (seqFun
    (graph (fun j => funOf filterRealizer (funOf (funOf pairComb v) j)))
    topElem) :=
  theorem_1_3 predSet_isScottContinuous
  (theorem_1_3 (seqFun_left_isScottContinuous topElem)
    filterSeq_isScottContinuous)
have hbody :
  funOf filterC (ofNat m) =
  predSet (seqFun
    (graph (fun j =>
      funOf filterRealizer (funOf (funOf pairComb (ofNat m)) j)))
    topElem) := by
  rw [hgraph]
  exact beta hcont (ofNat m)
have hseq (i : Nat) :
  funOf (graph (fun j =>
    funOf filterRealizer (funOf (funOf pairComb (ofNat m)) j)))
  (ofNat i) =
  ofNat (filterNum (Nat.pair m i)) := by
  have hb : funOf (graph (fun j =>
    funOf filterRealizer (funOf (funOf pairComb (ofNat m)) j)))
    (ofNat i) =
    funOf filterRealizer (funOf (funOf pairComb (ofNat m)) (ofNat i)) :=
    beta (theorem_1_3 (funOf_isScottContinuous filterRealizer)
      (funOf_isScottContinuous (funOf pairComb (ofNat m)))) (ofNat i)
  rw [hb, pairComb_app, filterRealizer_realizes]
rw [hbody]
ext j
constructor
* intro hj
  have : j + 1 in seqFun
    (graph (fun z =>
      funOf filterRealizer (funOf (funOf pairComb (ofNat m)) z)))
    topElem := hj
  obtain <i, -, hij> := Set.mem_iUnion_2.mp this
  have : filterNum (Nat.pair m i) = j + 1 := by
    have hij' : j + 1 in ofNat (filterNum (Nat.pair m i)) := by
      rwa [← hseq i]
    simpa [ofNat, eq_comm] using hij'
  have hbf : beforeHalt m i := by
    by_contra h
    simp [filterNum, Nat.unpair_pair, h] at this
  have hij' : i = j := by
    simp [filterNum, Nat.unpair_pair, hbf] at this
    omega
  subst hij'
  simpa [beforeHalt, Nat.lt_succ_iff] using hbf
* intro hj
  have hbf : beforeHalt m j := by
    simpa [beforeHalt, Nat.lt_succ_iff] using hj
  have : filterNum (Nat.pair m j) = j + 1 := by
    simp [filterNum, Nat.unpair_pair, hbf]

```

```

refine (show j + 1 in seqFun
  (graph (fun z =>
    funOf filterRealizer (funOf (funOf pairComb (ofNat m)) z)))
  topElem from ?_))
refine Set.mem_iUnion_2.mpr <j, Set.mem_univ j, ?_>
have : j + 1 in ofNat (filterNum (Nat.pair m j)) := by
  simp [ofNat, this]
rwa [← hseq j] at this

noncomputable def filterOp : Nat :=
  (theorem_3_2_surjective filterC_combinatorial).choose

theorem valNat_filterOp : valNat filterOp = filterC :=
  (theorem_3_2_surjective filterC_combinatorial).choose_spec

noncomputable def myhillFilterCode (m : Nat) : Nat := applyNat filterOp (num m)

theorem primrec_myhillFilterCode : Primrec myhillFilterCode :=
  primrec_applyNat.comp (Primrec.const filterOp) primrec_num

```

Lean 4 source (lines 2001–2400)

```

theorem valNat_myhillFilterCode (m : Nat) :
  valNat (myhillFilterCode m) = {j | forall i <= j, haltEnum i != m} := by
  rw [myhillFilterCode, valNat_apply, valNat_filterOp, eq_3_12, filterC_app]

noncomputable def myhillCase1Code (n m : Nat) : Nat :=
  applyNat (applyNat interCode n) (myhillFilterCode m)

theorem primrec_myhillCase1Code (n : Nat) : Primrec (myhillCase1Code n) :=
  primrec_applyNat.comp
    (primrec_applyNat.comp (Primrec.const interCode) (Primrec.const n))
  primrec_myhillFilterCode

theorem valNat_myhillCase1Code (n m : Nat) :
  valNat (myhillCase1Code n m) =
    valNat n ∩ {j | forall i <= j, haltEnum i != m} := by
  rw [myhillCase1Code, valNat_apply, valNat_apply, valNat_interCode,
    eq_2_17, valNat_myhillFilterCode]

theorem theorem_3_5_case1 {u : Pomega} {p : Nat → Nat} {n k : Nat}
  (hu : IsCombinatorial u) (hr : Realizes u p)
  (hext : IsExtensional valNat p)
  (hk : k in valNat (p n))
  (hnin : not exists j, e j subseq valNat n /\ k in valNat (p (fin j)))
  (hinf : not (valNat n).Finite) : False := by
  have hiff : forall m,
    k in valNat (p (myhillCase1Code n m)) <=> not exists t, haltEnum t = m := by
    intro m
  by_cases hex : exists t, haltEnum t = m
  * have hfin : ({j | forall i <= j, haltEnum i != m} : Pomega).Finite :=
    (Set.finite_Iio hex.choose).subset fun j hj =>
      Nat.lt_of_not_ge fun hle => hj hex.choose hle hex.choose_spec
  have hfins : (valNat (myhillCase1Code n m)).Finite := by
    rw [valNat_myhillCase1Code]
    exact hfin.inter_of_right _
  obtain <j, hj> := exists_code_of_finite hfins
  have hje : e j subseq valNat n := by
    rw [hj, valNat_myhillCase1Code]
    exact Set.inter_subset_left
  have : k notin valNat (p (fin j)) := fun h => hnin <j, hje, h>
  have heq := hext (myhillCase1Code n m) (fin j) (by simp [hj, valNat_fin])
  simp [heq, this, hex]

```

```

* have hall : {j | forall i <= j, haltEnum i != m} = Set.univ := by
  ext j
  constructor
  * intro _; trivial
  * intro _ i _
    exact fun h => hex <i, h>
  have : valNat (myhillCase1Code n m) = valNat n := by
    rw [valNat_myhillCase1Code, hall]
    simp
  have heq := hext (myhillCase1Code n m) n this
  simp [heq, hk, hex]
have hre : REPred fun m => not exists t, haltEnum t = m :=
  _root_.REPred.of_eq
  (valNat_mem_comp_primrec (k := k) hu hr (primrec_myhillCase1Code n))
  fun m => hiff m
exact haltEnum_range_not_computable
((ComputablePred.computable_iff_re_compl_re').2 <haltEnum_range_re, hre>)

/-- **Scott 1976, Theorem 3.5 (The completeness theorem for definability).**
If a total extensional mapping `p` is LAMBDA-definable, then there is a
LAMBDA-definable `q` with `val(p n) = q(val n)`. -/
theorem theorem_3_5 {p : Nat -> Nat}
  (hp : exists u, IsCombinatory u /\ Realizes u p)
  (hext : IsExtensional valNat p) :
  exists q, IsCombinatory q /\ forall n, valNat (p n) = funOf q (valNat n) := by
  obtain <u, hu, hr> := hp
  refine <myhillQ valNat p, IsRE.combinatory (myhillQ_isRE hu hr), fun n => ?_>
  rw [myhillQ_app]
  ext k
  constructor
  * intro hk
    by_contra hnin
    have hinf : forall j, e j = valNat n -> False := by
      intro j hj
      have : k in valNat (p (fin j)) := by
        have := hext n (fin j) (by simp [valNat_fin, hj])
        simpa [this, valNat_fin] using hk
      exact hnin (Set.mem_iUnion.mpr <j,
        Set.mem_iUnion.mpr <by simp [hj], this>>)
    -- Case 1: `val n` is infinite; finished after the filter construction.
    have hfin : not (valNat n).Finite := by
      intro hf
      obtain <j, hj> := exists_code_of_finite hf
      exact hinf j hj
    have hnin' : not exists j, e j subseq valNat n /\ k in valNat (p (fin j)) := by
      intro <j, hj, hkj>
      exact hnin (Set.mem_iUnion.mpr <j, Set.mem_iUnion.mpr <hj, hkj>>)
    exact theorem_3_5_case1 hu hr hext hk hnin' hfin
  * intro hk
    obtain <j, hk> := Set.mem_iUnion.mp hk
    obtain <hj, hk> := Set.mem_iUnion.mp hk
    by_contra hnin
    have hne : e j != valNat n := by
      intro hj'
      have := hext n (fin j) (by simp [valNat_fin, hj'])
      exact hnin (by simpa [this, valNat_fin] using hk)
    exact theorem_3_5_case2 hu hr hext hj hne hk hnin

/-- **Scott 1976, Definition.** Enumeration degree of `a`. -/
def Deg (a : Pomega) : Set Pomega :=
  {u | exists r, IsCombinatory r /\ u = funOf r a}

/-- Combinatory subalgebra: contains `G` and is closed under application. -/

```

```

def IsSubalgebra (A : Set Pomega) : Prop :=
  Gcomb in A /\ forall ?u v?, u in A -> v in A -> funOf u v in A

def Icomb_SK : Pomega := funOf (funOf Scomb Kcomb) Kcomb

theorem Icomb_SK_app (x : Pomega) : funOf Icomb_SK x = x := by
  rw [Icomb_SK, Scomb_beta3, Kcomb_beta2]

theorem Deg_isSubalgebra (a : Pomega) : IsSubalgebra (Deg a) := by
  constructor
  * refine <funOf Kcomb Gcomb, IsCombinatory.app .K Gcomb_combinatory, ?_>
    rw [Kcomb_beta2]
  * intro x y hx hy
    obtain <r, hr, rfl> := hx
    obtain <s, hs, rfl> := hy
    refine <funOf (funOf Scomb r) s, .app (.app .S hr) hs, ?_>
    rw [Scomb_beta3]

theorem Deg_self (a : Pomega) : a in Deg a :=
  <Icomb_SK, .app (.app .S .K) .K, (Icomb_SK_app a).symm>

/-- **Scott 1976, Theorem 3.6 (The subalgebra theorem).**
Every enumeration degree is a combinatory subalgebra generated by `a`
(together with `G`, which it contains). -/
theorem theorem_3_6_degree (a : Pomega) :
  IsSubalgebra (Deg a) /\ a in Deg a :=
  <Deg_isSubalgebra a, Deg_self a>

/-- The paper's single generator of a finite tuple: `cond(<xs>)(G)` -/
def packList : List Pomega -> Pomega
| [] => botElem
| x :: xs => seq2 x (packList xs)

def singleGenerator (xs : List Pomega) : Pomega :=
  funOf (funOf condC (packList xs)) Gcomb

theorem packList_cons_zero (x : Pomega) (xs : List Pomega) :
  funOf (packList (x :: xs)) (ofNat 0) = x :=
  seq2_app_zero x (packList xs)

theorem singleGenerator_app_zero (xs : List Pomega) :
  funOf (singleGenerator xs) zeroC = packList xs :=
  eq_3_2 (packList xs) Gcomb

/-- **Scott 1976, Theorem 3.6.** `cond(<xs>)(G)` applied to `0` is the
packed tuple, and `G` is in its degree. -/
theorem theorem_3_6_finite (xs : List Pomega) :
  packList xs in Deg (singleGenerator xs) /\
  Gcomb in Deg (singleGenerator xs) := by
  constructor
  * refine <funOf (funOf Scomb Icomb_SK) (funOf Kcomb zeroC),
    .app (.app .S (.app (.app .S .K) .K)) (.app .K .zero), ?_>
    rw [Scomb_beta3, Icomb_SK_app, Kcomb_beta2, singleGenerator_app_zero]
  * exact (Deg_isSubalgebra (singleGenerator xs)).1

/-- **Scott 1976, (3.13)-(3.14).** Semigroup generators. -/
def Rcomb : Pomega := graph (fun x => seq2 (ofNat 0) x)

def Lcomb : Pomega :=
  graph (fun x => funOf (funOf x (ofNat 1)) (funOf x (ofNat 2)))

theorem seq2_right_isScottContinuous (a : Pomega) :
  IsScottContinuous (fun b => seq2 a b) :=

```

```

graph_const_isScottContinuous
  (fun b z => condSet z a (condSet (predSet z) b botElem))
  (fun z => theorem_1_3 (condSet_isScottContinuous_right z a)
    (condSet_isScottContinuous_mid (predSet z) botElem))

theorem Rcomb_app (x : Pomega) : funOf Rcomb x = seq2 (ofNat 0) x :=
  beta (seq2_right_isScottContinuous (ofNat 0)) x

theorem Lcomb_app (x : Pomega) :
  funOf Lcomb x = funOf (funOf x (ofNat 1)) (funOf x (ofNat 2)) :=
  beta (theorem_1_3_tuple
    (fun y => funOf_isScottContinuous_left y)
    (fun t => funOf_isScottContinuous t)
    (funOf_isScottContinuous_left (ofNat 1))
    (funOf_isScottContinuous_left (ofNat 2))) x

/-- **Scott 1976, (3.15).** Positive branch of `u`: `<1, u, x_1>`. -/
def barPos (u x : Pomega) : Pomega :=
  seqCons (ofNat 1) (seq2 u (funOf x (ofNat 1)))

theorem barPos_zero (u x : Pomega) :
  funOf (barPos u x) (ofNat 0) = ofNat 1 := by
  simp [barPos, eq_2_22, eq_2_7_zero]

theorem barPos_one (u x : Pomega) :
  funOf (barPos u x) (ofNat 1) = u := by
  rw [barPos, eq_2_22]
  have hpred : predSet (ofNat 1) = ofNat 0 := by
  ext k; simp [predSet, ofNat]
  rw [hpred, eq_2_7_succ, seq2_app_zero]

theorem barPos_two (u x : Pomega) :
  funOf (barPos u x) (ofNat 2) = funOf x (ofNat 1) := by
  rw [barPos, eq_2_22]
  have hpred : predSet (ofNat 2) = ofNat 1 := by
  ext k; simp [predSet, ofNat]
  rw [hpred, eq_2_7_succ, seq2_app_one]

theorem seq2_left_isScottContinuous (b : Pomega) :
  IsScottContinuous (fun a => seq2 a b) :=
  graph_const_isScottContinuous
    (fun a z => condSet z a (condSet (predSet z) b botElem))
    (fun z => condSet_isScottContinuous_mid z _)

theorem seqCons_right_isScottContinuous (x : Pomega) :
  IsScottContinuous (fun xs => seqCons x xs) :=
  graph_const_isScottContinuous
    (fun xs z => condSet z x (funOf xs (predSet z)))
    (fun z => theorem_1_3 (condSet_isScottContinuous_right z x)
      (funOf_isScottContinuous_left (predSet z)))

/-- A closed divergent term denoting bottom. -/
def enumBottomTerm : Term :=
  .app (.lam 9 (.app (.var 9) (.var 9)))
    (.lam 9 (.app (.var 9) (.var 9)))

theorem enumBottomTerm_interp (? : Nat -> Pomega) :
  interp enumBottomTerm ? = botElem := by
  simp [enumBottomTerm, interp, envSet, Function.update, eq_2_14]

/-- `t` does not depend on environment slot `i`. -/
def Term.Avoids (i : Nat) : Term -> Prop
| .var j => j != i

```

```

| .zero => True
| .succ t => t.Avoids i
| .pred t => t.Avoids i
| .cond z x y => z.Avoids i /\ x.Avoids i /\ y.Avoids i
| .app u x => u.Avoids i /\ x.Avoids i
| .lam j body => j = i \/ body.Avoids i

theorem interp_avoids {i : Nat} (t : Term) (? : Nat -> Pomega) (v : Pomega)
  (h : t.Avoids i) : interp t (envSet ? i v) = interp t ? := by
  induction t generalizing ? i with
  | var j =>
    have hji : j != i := h
    simp [interp, envSet, Function.update, hji]
  | zero => rfl
  | succ t ih => exact congrArg succSet (ih (? := ?) (i := i) h)
  | pred t ih => exact congrArg predSet (ih (? := ?) (i := i) h)
  | cond z x y ihz ihx ihy =>
    simp only [interp]
    rw [ihz (? := ?) (i := i) h.1, ihx (? := ?) (i := i) h.2.1,
        ihy (? := ?) (i := i) h.2.2]
  | app u x ihu ihx =>
    simp only [interp]
    rw [ihu (? := ?) (i := i) h.1, ihx (? := ?) (i := i) h.2]
  | lam j body ih =>
    simp only [interp]
    apply congrArg graph
    funext w
    cases h with
    | inl hji =>
      subst hji
      simp [envSet, Function.update]
    | inr hb =>
      by_cases hji : j = i
      * subst hji
      simp [envSet, Function.update]
      * rw [envSet_comm (? := ?) (i := i) (j := j) (Ne.symm hji) v w,
          ih (? := envSet ? j w) (i := i) hb]

theorem enumBottomTerm_avoids (i : Nat) : enumBottomTerm.Avoids i := by
  unfold enumBottomTerm
  constructor <;>
  (by_cases h : 9 = i
    * exact Or.inl h
    * exact Or.inr <h, h>)

/-- Term-level binary sequence constructor. -/
def seq2Term (a b : Term) : Term :=
  .lam 8 (.cond (.var 8) a
    (.cond (.pred (.var 8)) b enumBottomTerm))

theorem seq2Term_interp (a b : Term) (? : Nat -> Pomega)
  (ha : a.Avoids 8) (hb : b.Avoids 8) :
  interp (seq2Term a b) ? = seq2 (interp a ?) (interp b ?) := by
  unfold seq2Term seq2
  apply congrArg graph
  funext z
  simp only [interp]
  rw [interp_avoids a ? z ha, interp_avoids b ? z hb, enumBottomTerm_interp]
  simp [envSet, Function.update]

/-- Term-level sequence cons constructor. -/
def seqConsTerm (a xs : Term) : Term :=
  .lam 7 (.cond (.var 7) a (.app xs (.pred (.var 7))))

```



```

theorem seqConsTerm_interp (a xs : Term) (? : Nat -> Pomega)
  (ha : a.Avoids 7) (hxs : xs.Avoids 7) :
  interp (seqConsTerm a xs) ? =
    seqCons (interp a ?) (interp xs ?) := by
  unfold seqConsTerm seqCons
  apply congrArg graph
  funext z
  simp only [interp]
  rw [interp_avoids a ? z ha, interp_avoids xs ? z hxs]
  simp [envSet, Function.update]

/-- Term for the positive branch `<1,u,x_1>` of Scott's bar operator. -/
def barPosTerm : Term :=
  seqConsTerm (.succ .zero)
  (seq2Term (.var 1) (.app (.var 2) (.succ .zero)))

theorem barPosTerm_interp (? : Nat -> Pomega) :
  interp barPosTerm ? = barPos (? 1) (? 2) := by
  have hzero : Term.Avoids 7 (.succ .zero) := by simp [Term.Avoids]
  have hseq : Term.Avoids 7
    (seq2Term (.var 1) (.app (.var 2) (.succ .zero))) := by
    change _ \/_
    refine Or.inr ?_
    refine <?_, ?_, ?_>
    * exact (by omega : (8 : Nat) != 7)
    * exact (by omega : (1 : Nat) != 7)
    * refine <?_, ?_, enumBottomTerm_avoids 7>
      * exact (by omega : (8 : Nat) != 7)
      * exact <(by omega : (2 : Nat) != 7), trivial>
  have h1 : Term.Avoids 8 (.var 1) := (by omega : (1 : Nat) != 8)
  have h2 : Term.Avoids 8 (.app (.var 2) (.succ .zero)) :=
    <(by omega : (2 : Nat) != 8), trivial>
  rw [barPosTerm, seqConsTerm_interp _ _ _ hzero hseq,
    seq2Term_interp _ _ _ h1 h2]
  simp [interp, barPos, succSet_ofNat]

/-- Closed terms for the two elementary semigroup generators. -/
def Rterm : Term := .lam 0 (seq2Term .zero (.var 0))

def Lterm : Term :=
  .lam 0
  (.app (.app (.var 0) (.succ .zero))
    (.app (.var 0) (.succ (.succ .zero)))))

theorem Rterm_interp : interp Rterm (fun _ => botElem) = Rcomb := by
  unfold Rterm Rcomb
  apply congrArg graph
  funext x
  change interp (seq2Term .zero (.var 0)) (envSet (fun _ => botElem) 0 x) =
    seq2 (ofNat 0) x
  rw [seq2Term_interp]
  * simp [interp, envSet, Function.update]
  * trivial
  * exact Nat.zero_ne_add_one 7

theorem Lterm_interp : interp Lterm (fun _ => botElem) = Lcomb := by
  unfold Lterm Lcomb
  simp [interp, envSet, Function.update, succSet_ofNat]

theorem Rcomb_combinatorial : IsCombinatorial Rcomb := by
  rw [← Rterm_interp]
  exact theorem_2_4_closed Rterm

```

```

theorem Lcomb_combinatorial : IsCombinatorial Lcomb := by
  rw [← Lterm_interp]
  exact theorem_2_4_closed Lterm

theorem barPos_isScottContinuous_u (x : Pomega) :
  IsScottContinuous (fun u => barPos u x) :=
  theorem_1_3 (seqCons_right_isScottContinuous (ofNat 1))
    (seq2_left_isScottContinuous (funOf x (ofNat 1)))

/-- **Scott 1976, (3.15).** Step of `u = fun x. x_0 ? <1, u, x_1>, overline{u(x_1)(x_2)}`. -/
def barStepBody (B u x : Pomega) : Pomega :=
  condSet (funOf x (ofNat 0)) (barPos u x)
    (funOf (funOf B (funOf u (funOf x (ofNat 1)))) (funOf x (ofNat 2)))

def barStep (B : Pomega) : Pomega :=
  graph (fun u => graph (fun x => barStepBody B u x))

/-- Closed term for the functional whose least fixed point is `barComb`. -/
def barStepTerm : Term :=
  .lam 0 (.lam 1 (.lam 2
    (.cond (.app (.var 2) .zero) barPosTerm
      (.app
        (.app (.var 0)
          (.app (.var 1) (.app (.var 2) (.succ .zero))))
          (.app (.var 2) (.succ (.succ .zero)))))))

theorem barStepTerm_interp :
  interp barStepTerm (fun _ => botElem) = graph barStep := by
  unfold barStepTerm barStep
  simp only [interp, envSet, Function.update_self,
    Function.update_of_ne (by decide : (1 : Nat) != 0),
    Function.update_of_ne (by decide : (2 : Nat) != 0),
    Function.update_of_ne (by decide : (2 : Nat) != 1)]
  apply congrArg graph
  funext B
  apply congrArg graph
  funext u
  apply congrArg graph
  funext x
  simp [barStepBody, barPosTerm_interp, interp, envSet, Function.update,
    succSet_ofNat]

```

Lean 4 source (lines 2401–2800)

```

theorem barStepBody_isScottContinuous_B (u x : Pomega) :
  IsScottContinuous (fun B => barStepBody B u x) :=
  theorem_1_3 (condSet_isScottContinuous_right (funOf x (ofNat 0)) (barPos u x))
    (theorem_1_3
      (f := fun w => funOf w (funOf x (ofNat 2)))
      (g := fun B => funOf B (funOf u (funOf x (ofNat 1))))
      (funOf_isScottContinuous_left (funOf x (ofNat 2)))
      (funOf_isScottContinuous_left (funOf u (funOf x (ofNat 1)))))

theorem barStep_isScottContinuous : IsScottContinuous barStep :=
  graph_const_isScottContinuous
    (fun B u => graph (fun x => barStepBody B u x))
    (fun u => graph_const_isScottContinuous
      (fun B x => barStepBody B u x)
      (fun x => barStepBody_isScottContinuous_B u x))

/-- **Scott 1976, (3.15).** The bar combinator as a least fixed point. -/
def barComb : Pomega := fix barStep

```

```

theorem barComb_combinatorial : IsCombinatorial barComb := by
  have hY : funOf Ycomb (interp barStepTerm (fun _ => botElem)) = barComb := by
    rw [barStepTerm_interp, theorem_2_5 barStep_isScottContinuous]
    rfl
  exact hY |> IsCombinatorial.app Ycomb_combinatorial (theorem_2_4_closed barStepTerm)

theorem barStepBody_isScottContinuous_u (B x : Pomega) :
  IsScottContinuous (fun u => barStepBody B u x) :=
  theorem_1_3_tuple
    (fun y => condSet_isScottContinuous_mid (funOf x (ofNat 0)) y)
    (fun w => condSet_isScottContinuous_right (funOf x (ofNat 0)) w)
    (barPos_isScottContinuous_u x)
    (theorem_1_3
      (f := fun w => funOf w (funOf x (ofNat 2)))
      (g := fun u => funOf B (funOf u (funOf x (ofNat 1))))
      (funOf_isScottContinuous_left (funOf x (ofNat 2)))
      (theorem_1_3 (funOf_isScottContinuous B)
        (funOf_isScottContinuous_left (funOf x (ofNat 1)))))

theorem barPos_isScottContinuous_x (u : Pomega) :
  IsScottContinuous (fun x => barPos u x) :=
  theorem_1_3 (f := fun xs => seqCons (ofNat 1) xs)
    (g := fun x => seq2 u (funOf x (ofNat 1)))
    (seqCons_right_isScottContinuous (ofNat 1))
    (theorem_1_3 (seq2_right_isScottContinuous u)
      (funOf_isScottContinuous_left (ofNat 1)))

theorem barStepBody_isScottContinuous_x (B u : Pomega) :
  IsScottContinuous (fun x => barStepBody B u x) :=
  theorem_1_3_nary
    (fun y z => condSet_isScottContinuous_left y z)
    (fun tes z => condSet_isScottContinuous_mid tes z)
    (fun tes th => condSet_isScottContinuous_right tes th)
    (funOf_isScottContinuous_left (ofNat 0))
    (barPos_isScottContinuous_x u)
    (theorem_1_3_tuple
      (fun y => funOf_isScottContinuous_left y)
      (fun w => funOf_isScottContinuous w)
      (theorem_1_3 (funOf_isScottContinuous B)
        (theorem_1_3 (funOf_isScottContinuous u)
          (funOf_isScottContinuous_left (ofNat 1)))))
    (funOf_isScottContinuous_left (ofNat 2)))

theorem barStep_app (B u : Pomega) :
  funOf (barStep B) u = graph (fun x => barStepBody B u x) :=
  beta (graph_const_isScottContinuous (fun u x => barStepBody B u x)
    (fun x => barStepBody_isScottContinuous_u B x)) u

/-- **Scott 1976, (3.15).** Unfolding of the least bar combinator. -/
theorem eq_3_15 (u : Pomega) :
  funOf barComb u = graph (fun x => barStepBody barComb u x) := by
  have hfix : barStep barComb = barComb :=
    (theorem_1_4 barStep_isScottContinuous).1
  have ha := barStep_app barComb u
  rwa [hfix] at ha

theorem barComb_app2 (u x : Pomega) :
  funOf (funOf barComb u) x = barStepBody barComb u x := by
  have ha : funOf barComb u = graph (fun z => barStepBody barComb u z) :=
    eq_3_15 u
  rw [ha]
  exact beta (barStepBody_isScottContinuous_x barComb u) x

```

```

theorem Rcomb_app_zero (x : Pomega) :
  funOf (funOf Rcomb x) (ofNat 0) = ofNat 0 := by
  rw [Rcomb_app, seq2_app_zero]

/-- **Scott 1976, (3.16).**  $\overline{L(u^+(R(x)))} = u(x)$  on the zero-test branch. -/
theorem eq_3_16 (u x : Pomega) :
  funOf Lcomb (barPos u (funOf Rcomb x)) = funOf u x := by
  rw [Lcomb_app, barPos_one, barPos_two, Rcomb_app, seq2_app_one]

/-- **Scott 1976, (3.16).**  $\overline{L \text{ comp } u \text{ comp } R} = \text{fun } x. u(x)$  from the Y-definition. -/
theorem eq_3_16_bar (u x : Pomega) :
  funOf Lcomb (funOf (funOf barComb u) (funOf Rcomb x)) = funOf u x := by
  rw [barComb_app2, barStepBody, Rcomb_app_zero, eq_2_7_zero]
  exact eq_3_16 u x

/-- Projection calculation used in the proof of Scott 1976, (3.17). -/
theorem eq_3_17_projections (u v x : Pomega) :
  funOf (barPos u (barPos v (funOf Rcomb x))) (ofNat 1) = u /\
  funOf (barPos v (funOf Rcomb x)) (ofNat 1) = v /\
  funOf (barPos v (funOf Rcomb x)) (ofNat 2) = x := by
  refine <barPos_one _ _, barPos_one _ _, ?_>
  rw [barPos_two, Rcomb_app, seq2_app_one]

/-- The pointwise calculations used by Theorem 3.7. -/
theorem theorem_3_7_equations (u v x : Pomega) :
  funOf Lcomb (funOf (funOf barComb u) (funOf Rcomb x)) = funOf u x /\
  funOf (barPos v (funOf Rcomb x)) (ofNat 1) = v /\
  funOf (barPos v (funOf Rcomb x)) (ofNat 2) = x :=
  <eq_3_16_bar u x, (eq_3_17_projections u v x).2.1,
  (eq_3_17_projections u v x).2.2>

/-- Composition in the semigroup  $\overline{\text{FUN}}$ . -/
def enumComp (u v : Pomega) : Pomega :=
  graph (fun x => funOf u (funOf v x))

theorem enumComp_app (u v x : Pomega) :
  funOf (enumComp u v) x = funOf u (funOf v x) :=
  beta (theorem_1_3 (funOf_isScottContinuous u) (funOf_isScottContinuous v)) x

theorem barComb_on_R (u x : Pomega) :
  funOf (funOf barComb u) (funOf Rcomb x) =
  barPos u (funOf Rcomb x) := by
  rw [barComb_app2, barStepBody, Rcomb_app_zero, eq_2_7_zero]

theorem barComb_on_barPos_R (u v x : Pomega) :
  funOf (funOf barComb u) (barPos v (funOf Rcomb x)) =
  funOf (funOf barComb (funOf u v)) x := by
  rw [barComb_app2, barStepBody, barPos_zero, eq_2_7_succ,
  barPos_one, barPos_two, Rcomb_app, seq2_app_one]

/-- **Scott 1976, (3.17).** Operator identity
 $\overline{u \text{ comp } v \text{ comp } R} = \overline{u(v)}$ . -/
theorem eq_3_17 (u v : Pomega) :
  enumComp (funOf barComb u) (enumComp (funOf barComb v) Rcomb) =
  funOf barComb (funOf u v) := by
  conv_rhs => rw [eq_3_15]
  unfold enumComp
  apply congrArg graph
  funext x
  change funOf (funOf barComb u)
  (funOf (lam fun x => funOf (funOf barComb v) (funOf Rcomb x)) x) =
  barStepBody barComb (funOf u v) x
  rw [beta (theorem_1_3 (funOf_isScottContinuous (funOf barComb v))
```

```

      (funOf_isScottContinuous Rcomb)) x]
rw [barComb_on_R, barComb_on_barPos_R, barComb_app2]

/-- Scott's `G`. -/
def Gbar : Pomega := funOf barComb Gcomb

/-- The subsemigroup generated by `R`, `L`, and `G`. -/
inductive GeneratedSemigroup : Pomega -> Prop
| R : GeneratedSemigroup Rcomb
| L : GeneratedSemigroup Lcomb
| Gbar : GeneratedSemigroup Gbar
| comp {u v} : GeneratedSemigroup u -> GeneratedSemigroup v ->
  GeneratedSemigroup (enumComp u v)

theorem bar_generated {u : Pomega} (hu : GeneratedFromG u) :
  GeneratedSemigroup (funOf barComb u) := by
  induction hu with
  | G => exact GeneratedSemigroup.Gbar
  | app _ _ ihu ihv =>
    rw [ <- eq_3_17]
    exact .comp ihu (.comp ihv .R)

theorem eq_3_16_operator (u : Pomega) :
  enumComp Lcomb (enumComp (funOf barComb u) Rcomb) =
    graph (fun x => funOf u x) := by
  unfold enumComp
  apply congrArg graph
  funext x
  change funOf Lcomb
  (funOf (lam fun x => funOf (funOf barComb u) (funOf Rcomb x)) x) =
    funOf u x
  rw [beta (theorem_1_3 (funOf_isScottContinuous (funOf barComb u))
    (funOf_isScottContinuous Rcomb)) x]
  exact eq_3_16_bar u x

/-- The substantive generation direction of Scott 1976, Theorem 3.7:
every element of `RE I FUN` is generated by `R`, `L`, and `G`. -/
theorem theorem_3_7_generation {u : Pomega}
  (huRE : u in RE) (huFUN : u in FUN) : GeneratedSemigroup u := by
  have hbar : GeneratedSemigroup (funOf barComb u) :=
    bar_generated ((theorem_3_1 (u := u)).mp huRE)
  have hgen : GeneratedSemigroup
    (enumComp Lcomb (enumComp (funOf barComb u) Rcomb)) :=
    .comp .L (.comp hbar .R)
  rw [eq_3_16_operator] at hgen
  simpa [FUN] using huFUN |> hgen

/-- Closed term for Scott's function-space retract `fun u fun x. u(x)`. -/
def funRetractTerm : Term :=
  .lam 0 (.lam 1 (.app (.var 0) (.var 1)))

theorem funRetractTerm_interp :
  interp funRetractTerm (fun _ => botElem) = funRetract := by
  unfold funRetractTerm funRetract
  simp [interp, envSet, Function.update]

theorem funRetract_combinatorial : IsCombinatorial funRetract := by
  rw [ <- funRetractTerm_interp]
  exact theorem_2_4_closed funRetractTerm

theorem graph_mem_FUN {f : Pomega -> Pomega} (hf : IsScottContinuous f) :
  graph f in FUN := by
  change graph f = graph (funOf (graph f))

```

```

rw [theorem_1_2_i hf]

theorem Rcomb_mem_FUN : Rcomb in FUN :=
  graph_mem_FUN (seq2_right_isScottContinuous (ofNat 0))

theorem Lcomb_mem_FUN : Lcomb in FUN :=
  graph_mem_FUN (theorem_1_3_tuple
    (fun y => funOf_isScottContinuous_left y)
    (fun t => funOf_isScottContinuous t)
    (funOf_isScottContinuous_left (ofNat 1))
    (funOf_isScottContinuous_left (ofNat 2)))

theorem Gbar_combinatorial : IsCombinatorial Gbar :=
  .app barComb_combinatorial Gcomb_combinatorial

theorem Gbar_mem_FUN : Gbar in FUN := by
  change Gbar = graph (funOf Gbar)
  have h : Gbar = graph (fun x => barStepBody barComb Gcomb x) := eq_3_15 Gcomb
  have hf : IsScottContinuous (fun x => barStepBody barComb Gcomb x) :=
    barStepBody_isScottContinuous_x barComb Gcomb
  rw [h, theorem_1_2_i hf]

theorem enumComp_eq_compose (u v : Pomega) :
  enumComp u v = funOf funRetract (composeC u v) := by
  rw [funRetract_app, composeC]
  apply congrArg graph
  funext x
  exact (SK_comp u v x).symm

theorem enumComp_combinatorial {u v : Pomega}
  (hu : IsCombinatorial u) (hv : IsCombinatorial v) :
  IsCombinatorial (enumComp u v) := by
  rw [enumComp_eq_compose]
  exact .app funRetract_combinatorial (composeC_combinatorial hu hv)

theorem enumComp_mem_FUN (u v : Pomega) : enumComp u v in FUN :=
  graph_mem_FUN (theorem_1_3 (funOf_isScottContinuous u) (funOf_isScottContinuous v))

theorem generatedSemigroup_mem_RE_FUN {u : Pomega} (hu : GeneratedSemigroup u) :
  u in RE I FUN := by
  induction hu with
  | R => exact <Rcomb_combinatorial, Rcomb_mem_FUN>
  | L => exact <Lcomb_combinatorial, Lcomb_mem_FUN>
  | Gbar => exact <Gbar_combinatorial, Gbar_mem_FUN>
  | comp _ _ ihu ihv =>
    exact <enumComp_combinatorial ihu.1 ihv.1, enumComp_mem_FUN _ _>

/-- **Scott 1976, Theorem 3.7 (The semigroup theorem).**
The countable semigroup `RE I FUN` of computable enumeration operators
is finitely generated by `R`, `L` and `G`. -/
theorem theorem_3_7 {u : Pomega} :
  u in RE I FUN <-> GeneratedSemigroup u :=
  <fun h => theorem_3_7_generation h.1 h.2, generatedSemigroup_mem_RE_FUN>

/-- Combinatorial elements lie in every enumeration degree, since `Deg a`
contains `G` and is closed under application. -/
theorem combinatorial_mem_Deg (a : Pomega) {u : Pomega}
  (hu : IsCombinatorial u) : u in Deg a := by
  have huG : GeneratedFromG u := (theorem_3_1 (u := u)).mp hu
  clear hu
  induction huG with
  | G => exact (Deg_isSubalgebra a).1
  | app _ _ ih ih' => exact (Deg_isSubalgebra a).2 ih ih'

```

```

/-- The least combinatory subalgebra containing every member of `xs`. -/
def GeneratedSubalgebra (xs : List Pomega) : Set Pomega :=
  {u | forall A : Set Pomega, IsSubalgebra A ->
    (forall x, x in xs -> x in A) -> u in A}

theorem GeneratedSubalgebra_isSubalgebra (xs : List Pomega) :
  IsSubalgebra (GeneratedSubalgebra xs) := by
  constructor
  * intro A hA _
    exact hA.1
  * intro u v hu hv A hA hxs
    exact hA.2 (hu A hA hxs) (hv A hA hxs)

theorem GeneratedSubalgebra_generator {xs : List Pomega} {x : Pomega}
  (hx : x in xs) : x in GeneratedSubalgebra xs :=
  fun _ _ hxs => hxs x hx

theorem combinatory_mem_subalgebra {A : Set Pomega} (hA : IsSubalgebra A)
  {u : Pomega} (hu : IsCombinatory u) : u in A := by
  have hgen : GeneratedFromG u := (theorem_3_1 (u := u)).mp hu
  clear hu
  induction hgen with
  | G => exact hA.1
  | app _ _ ih ih' => exact hA.2 ih ih'

theorem seq2_mem_subalgebra {A : Set Pomega} (hA : IsSubalgebra A)
  {x y : Pomega} (hx : x in A) (hy : y in A) : seq2 x y in A := by
  have hS := combinatory_mem_subalgebra hA IsCombinatory.S
  have hK := combinatory_mem_subalgebra hA IsCombinatory.K
  have hcond := combinatory_mem_subalgebra hA IsCombinatory.cond
  have hpred := combinatory_mem_subalgebra hA IsCombinatory.pred
  have hzero := combinatory_mem_subalgebra hA IsCombinatory.zero
  have hbot := combinatory_mem_subalgebra hA bot_combinatory
  have hcondx := hA.2 hcond hx
  have hyb := hA.2 (hA.2 hcond hy) (hA.2 hpred hzero)
  have hinter := hA.2 (hA.2 hS (hA.2 hK hyb)) hpred
  have hF := hA.2 (hA.2 hS (hA.2 hK hcondx)) hinter
  have hI := hA.2 (hA.2 hS hK) hK
  rw [seq2_eq_SK]
  exact hA.2 (hA.2 hS hF) hI

theorem packList_mem_subalgebra {A : Set Pomega} (hA : IsSubalgebra A) :
  forall {xs : List Pomega}, (forall x, x in xs -> x in A) -> packList xs in A
  | [], _ => combinatory_mem_subalgebra hA bot_combinatory
  | x :: xs, hxs =>
    seq2_mem_subalgebra hA (hxs x (by simp))
    (packList_mem_subalgebra hA fun y hy => hxs y (by simp [hy]))

theorem singleGenerator_mem_subalgebra {A : Set Pomega} (hA : IsSubalgebra A)
  {xs : List Pomega} (hxs : forall x, x in xs -> x in A) :
  singleGenerator xs in A := by
  have hc := combinatory_mem_subalgebra hA IsCombinatory.cond
  exact hA.2 (hA.2 hc (packList_mem_subalgebra hA hxs)) hA.1

theorem packList_components_mem_Deg {a : Pomega} :
  forall {xs : List Pomega}, packList xs in Deg a ->
  forall x, x in xs -> x in Deg a
  | [], _hp, x, hx => by simp at hx
  | y :: ys, hp, x, hx => by
    have h0 := combinatory_mem_Deg a (ofNat_combinatory 0)
    have h1 := combinatory_mem_Deg a (ofNat_combinatory 1)
    have hy : y in Deg a := by

```

```

      have := (Deg_isSubalgebra a).2 hp h0
      simp [packList, seq2_app_zero] using this
    have htail : packList ys in Deg a := by
      have := (Deg_isSubalgebra a).2 hp h1
      simp [packList, seq2_app_one] using this
    rcases List.mem_cons.mp hx with rfl | hx
    * exact hy
    * exact packList_components_mem_Deg htail x hx

theorem generators_mem_singleGenerator_degree (xs : List Pomega) :
  forall x, x in xs -> x in Deg (singleGenerator xs) :=
  packList_components_mem_Deg (theorem_3_6_finite xs).1

/-- **Scott 1976, Theorem 3.6.** The least subalgebra generated by a finite
list is exactly the degree of Scott's single packed generator. -/
theorem theorem_3_6_generated (xs : List Pomega) :
  GeneratedSubalgebra xs = Deg (singleGenerator xs) := by
  ext u
  constructor
  * intro hu
    exact hu _ (Deg_isSubalgebra _) (generators_mem_singleGenerator_degree xs)
  * rintro <r, hr, rfl> A hA hxs
    exact hA.2 (combinatory_mem_subalgebra hA hr)
      (singleGenerator_mem_subalgebra hA hxs)

/-- Exact finite-generation classification of enumeration degrees. -/
theorem theorem_3_6 (A : Set Pomega) :
  (exists a, A = Deg a) <->
  exists xs : List Pomega, A = GeneratedSubalgebra xs := by
  constructor
  * rintro <a, rfl>
    refine <[a], ?_>
    ext u
    constructor
    * rintro <r, hr, rfl>
      exact (GeneratedSubalgebra_isSubalgebra [a]).2
        (combinatory_mem_subalgebra (GeneratedSubalgebra_isSubalgebra [a]) hr)
        (GeneratedSubalgebra_generator (by simp))
    * intro hu
      exact hu _ (Deg_isSubalgebra a) (by
        intro x hx
        simp at hx
        subst x
        exact Deg_self a)
  * rintro <xs, rfl>
    exact <singleGenerator xs, theorem_3_6_generated xs>

/-- **Scott 1976, Theorem 3.6 converse (singleton).** The packed
generator recovers `x` in its own degree. -/
theorem theorem_3_6_converse (x : Pomega) :
  x in Deg (singleGenerator [x]) := by
  have hp := (theorem_3_6_finite [x]).1
  have h0 := combinatory_mem_Deg (singleGenerator [x]) (ofNat_combinatory 0)
  have : funOf (packList [x]) (ofNat 0) in Deg (singleGenerator [x]) :=
    (Deg_isSubalgebra _).2 hp h0
  simp [packList_cons_zero] using this

/-- Nested positive-branch packaging of (3.17): `u^(v^(R(x)))`
has first projection `u` and recovers `u(v)(x)` via `L` after
replacing the head by `u(v)`. -/
theorem eq_3_17_semigroup (u v x : Pomega) :
  funOf (barPos u (barPos v (funOf Rcomb x))) (ofNat 1) = u /\
  funOf Lcomb (barPos (funOf u v) (funOf Rcomb x)) =

```



```

      funOf (funOf u v) x :=
    <(eq_3_17_projections u v x).1, eq_3_16 (funOf u v) x>

```

Lean 4 source (lines 2801–2998)

```

/-- **Scott 1976, (4.46).** `vaal` on trees, companion of `val`. -/
def vaalF (v : Pomega) : Pomega :=
  graph (fun x =>
    condSet (funOf x (ofNat 0)) Gcomb
      (funOf (funOf v (funOf (funOf x (ofNat 1)) (ofNat 0)))
        (funOf v (funOf (funOf x (ofNat 1)) (ofNat 1)))))

def vaalC : Pomega := fix vaalF

theorem vaalF_isScottContinuous : IsScottContinuous vaalF :=
  graph_const_isScottContinuous
    (fun v x =>
      condSet (funOf x (ofNat 0)) Gcomb
        (funOf (funOf v (funOf (funOf x (ofNat 1)) (ofNat 0)))
          (funOf v (funOf (funOf x (ofNat 1)) (ofNat 1)))))
    (fun x =>
      theorem_1_3
        (condSet_isScottContinuous_right (funOf x (ofNat 0)) Gcomb)
        (continuous_tuple
          (fun y => funOf_isScottContinuous_left y)
          (fun u => funOf_isScottContinuous u)
          (funOf_isScottContinuous_left
            (funOf (funOf x (ofNat 1)) (ofNat 0)))
          (funOf_isScottContinuous_left
            (funOf (funOf x (ofNat 1)) (ofNat 1)))))

theorem vaalF_body_isScottContinuous (v : Pomega) :
  IsScottContinuous (fun x =>
    condSet (funOf x (ofNat 0)) Gcomb
      (funOf (funOf v (funOf (funOf x (ofNat 1)) (ofNat 0)))
        (funOf v (funOf (funOf x (ofNat 1)) (ofNat 1))))) :=
  continuous_nary
    (fun y z => condSet_isScottContinuous_left y z)
    (fun x z => condSet_isScottContinuous_mid x z)
    (fun x y => condSet_isScottContinuous_right x y)
    (funOf_isScottContinuous_left (ofNat 0))
    (const_isScottContinuous Gcomb)
    (continuous_tuple
      (fun y => funOf_isScottContinuous_left y)
      (fun u => funOf_isScottContinuous u)
      (theorem_1_3 (funOf_isScottContinuous v)
        (theorem_1_3
          (f := fun u => funOf u (ofNat 0))
          (g := fun x => funOf x (ofNat 1))
          (funOf_isScottContinuous_left (ofNat 0))
          (funOf_isScottContinuous_left (ofNat 1)))))
      (theorem_1_3 (funOf_isScottContinuous v)
        (theorem_1_3
          (f := fun u => funOf u (ofNat 1))
          (g := fun x => funOf x (ofNat 1))
          (funOf_isScottContinuous_left (ofNat 1))
          (funOf_isScottContinuous_left (ofNat 1)))))

theorem vaalF_app (v x : Pomega) :
  funOf (vaalF v) x =
    condSet (funOf x (ofNat 0)) Gcomb
      (funOf (funOf v (funOf (funOf x (ofNat 1)) (ofNat 0)))
        (funOf v (funOf (funOf x (ofNat 1)) (ofNat 1))))) :=
  beta (vaalF_body_isScottContinuous v) x

```

```

theorem vaalC_fixedPoint : vaalF vaalC = vaalC :=
  (theorem_1_4 vaalF_isScottContinuous).1

/-- **Scott 1976, (4.46).** Unfolding of `vaal` at a tree code. -/
theorem vaalC_unfold (x : Pomega) :
  funOf vaalC x =
    condSet (funOf x (ofNat 0)) Gcomb
      (funOf (funOf vaalC (funOf (funOf x (ofNat 1)) (ofNat 0)))
        (funOf vaalC (funOf (funOf x (ofNat 1)) (ofNat 1)))) := by
  have h := congrArg (fun v => funOf v x) vaalC_fixedPoint
  simpa [vaalF_app] using h.symm

/-- Closed terms for the five packed combinators of `G`. Binders avoid
slot 8 so they can be placed inside `seq2Term`. -/
def sucClosed : Term := .lam 4 (.succ (.var 4))
def predClosed : Term := .lam 4 (.pred (.var 4))
def condClosed : Term :=
  .lam 4 (.lam 5 (.lam 6 (.cond (.var 6) (.var 4) (.var 5))))
def kClosed : Term := .lam 4 (.lam 5 (.var 4))
def sClosed : Term :=
  .lam 4 (.lam 5 (.lam 6
    (.app (.app (.var 4) (.var 6)) (.app (.var 5) (.var 6)))))

theorem sucClosed_avoids8 : sucClosed.Avoids 8 := by
  simp [sucClosed, Term.Avoids]

theorem predClosed_avoids8 : predClosed.Avoids 8 := by
  simp [predClosed, Term.Avoids]

theorem condClosed_avoids8 : condClosed.Avoids 8 := by
  simp [condClosed, Term.Avoids]

theorem kClosed_avoids8 : kClosed.Avoids 8 := by
  simp [kClosed, Term.Avoids]

theorem sClosed_avoids8 : sClosed.Avoids 8 := by
  simp [sClosed, Term.Avoids]

theorem seq2Term_avoids8 (a b : Term) : (seq2Term a b).Avoids 8 :=
  Or.inl rfl

theorem sucClosed_interp (? : Nat -> Pomega) : interp sucClosed ? = sucC := by
  unfold sucClosed sucC
  simp [interp, envSet, Function.update]

theorem predClosed_interp (? : Nat -> Pomega) : interp predClosed ? = predC := by
  unfold predClosed predC
  simp [interp, envSet, Function.update]

theorem condClosed_interp (? : Nat -> Pomega) : interp condClosed ? = condC := by
  unfold condClosed condC
  simp [interp, envSet, Function.update]

theorem kClosed_interp (? : Nat -> Pomega) : interp kClosed ? = Kcomb := by
  unfold kClosed Kcomb
  simp [interp, envSet, Function.update]

theorem sClosed_interp (? : Nat -> Pomega) : interp sClosed ? = Scomb := by
  unfold sClosed Scomb
  simp [interp, envSet, Function.update]

def gpackClosed : Term :=

```

```

seq2Term sucClosed
  (seq2Term predClosed
    (seq2Term condClosed (seq2Term kClosed sClosed)))

theorem gpackClosed_interp (? : Nat -> Pomega) :
  interp gpackClosed ? = Gpack := by
  unfold gpackClosed Gpack
  rw [seq2Term_interp _ _ ? sucClosed_avoids8 (seq2Term_avoids8 _ _),
    seq2Term_interp _ _ ? predClosed_avoids8 (seq2Term_avoids8 _ _),
    seq2Term_interp _ _ ? condClosed_avoids8 (seq2Term_avoids8 _ _),
    seq2Term_interp _ _ ? kClosed_avoids8 sClosed_avoids8,
    sucClosed_interp, predClosed_interp, condClosed_interp,
    kClosed_interp, sClosed_interp]

def gClosed : Term := .lam 3 (.cond (.var 3) gpackClosed .zero)

theorem gClosed_interp (? : Nat -> Pomega) : interp gClosed ? = Gcomb := by
  unfold gClosed Gcomb
  apply congrArg graph
  funext z
  simp only [interp]
  rw [gpackClosed_interp]
  simp [envSet, Function.update, zeroC]

/-- Closed term for the functional whose least fixed point is `vaal`. -/
def vaalStepTerm : Term :=
  .lam 0 (.lam 1
    (.cond (.app (.var 1) .zero) gClosed
      (.app
        (.app (.var 0) (.app (.app (.var 1) (.succ .zero)) .zero))
        (.app (.var 0) (.app (.app (.var 1) (.succ .zero)) (.succ .zero)))))))

theorem vaalStepTerm_interp :
  interp vaalStepTerm (fun _ => botElem) = graph vaalF := by
  unfold vaalStepTerm vaalF
  -- `interp (.lam i t)` is definitionally a graph; keep `gClosed` packed.
  apply congrArg graph
  funext v
  apply congrArg graph
  funext x
  show condSet (interp (.app (.var 1) .zero)
    (envSet (envSet (fun _ => botElem) 0 v) 1 x))
    (interp gClosed (envSet (envSet (fun _ => botElem) 0 v) 1 x))
    (interp
      (.app
        (.app (.var 0) (.app (.app (.var 1) (.succ .zero)) .zero))
        (.app (.var 0) (.app (.app (.var 1) (.succ .zero)) (.succ .zero))))))
    (envSet (envSet (fun _ => botElem) 0 v) 1 x)) =
  condSet (funOf x (ofNat 0)) Gcomb
    (funOf (funOf v (funOf (funOf x (ofNat 1)) (ofNat 0)))
      (funOf v (funOf (funOf x (ofNat 1)) (ofNat 1))))
  rw [gClosed_interp]
  simp [interp, envSet, Function.update, succSet_ofNat]

theorem vaalC_combinatorial : IsCombinatorial vaalC := by
  have hY : funOf Ycomb (interp vaalStepTerm (fun _ => botElem)) = vaalC := by
    rw [vaalStepTerm_interp, theorem_2_5 vaalF_isScottContinuous]
    rfl
  exact hY |> IsCombinatorial.app Ycomb_combinatorial (theorem_2_4_closed vaalStepTerm)

/-- **Scott 1976, (4.46).** `vaal : tree -> id` as a typed map. -/
def vaalTyped : Pomega := funOf (arrowR treeR lcomb) vaalC

```

```

theorem vaalC_typed :
  typed vaalTyped (arrowR treeR Icomb) :=
  typed_apply_retract (arrowR_isRetract treeR_isRetract Icomb_isRetract)

theorem vaalC_computable : IsRE vaalC :=
  combinatory_isRE vaalC_combinatory

/-- **Scott 1976, TOT.** Graphs of total number-theoretic functions:
`$`-invariant and integer-valued on integers. -/
def TOT : Set Pomega :=
  {u | u = funOf dollarC u /\ forall n, exists k, funOf u (ofNat n) = ofNat k}

end Scott1976.DataTypesAsLattices

```

A.10 Scott1976/DataTypesAsLattices/FixedLattices.lean

128 lines.

Lean 4 source

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/
import Mathlib.Order.CompleteLattice.Defs
import Mathlib.Data.Finset.Basic

/-!
# Directed compactness and countable algebraic lattices

The interfaces in this file are deliberately order-theoretic. In particular,
compactness is measured in the lattice under consideration, not in an ambient
powerset.
-/

namespace Scott1976.DataTypesAsLattices

/-- A nonempty directed subset of a preorder. -/
def IsDirectedSet {α : Type u} [Preorder α] (s : Set α) : Prop :=
  s.Nonempty /\
  forall ?x?, x in s -> forall ?y?, y in s ->
    exists z in s, x <= z /\ y <= z

/-- Pin `<=` to the `CompleteLattice` instance path so Challenge and
Solution elaborate `CountablyAlgebraic.mk` identically. -/
abbrev completeLatticeLE {α : Type u} [CompleteLattice α] : LE α :=
  @Preorder.toLE α
  (@PartialOrder.toPreorder α
    (@CompleteSemilatticeInf.toPartialOrder α
      (@CompleteLattice.toCompleteSemilatticeInf α ?_)))

abbrev completeLatticeSupSet {α : Type u} [CompleteLattice α] : SupSet α :=
  @CompleteSemilatticeSup.toSupSet α
  (@CompleteLattice.toCompleteSemilatticeSup α ?_?)

abbrev completeLatticePreorder {α : Type u} [CompleteLattice α] : Preorder α :=
  @PartialOrder.toPreorder α
  (@CompleteSemilatticeInf.toPartialOrder α
    (@CompleteLattice.toCompleteSemilatticeInf α ?_)))

/-- The way-below relation, phrased using directed suprema. -/
def WayBelow {α : Type u} [CompleteLattice α] (x y : α) : Prop :=

```

```

forall s : Set a, @IsDirectedSet a completeLatticePreorder s ->
  @LE.le a completeLatticeLE y (@sSup a completeLatticeSupSet s) ->
    exists z in s, @LE.le a completeLatticeLE x z

/-- Compactness internal to a complete lattice. -/
def IsCompact {a : Type u} [CompleteLattice a] (x : a) : Prop :=
  WayBelow x x

/-- A basis witnesses the continuous-lattice property by way-below elements. -/
def IsContinuousBasis {a : Type u} [CompleteLattice a]
  (basis : a -> Set a) : Prop :=
  forall x, @IsDirectedSet a completeLatticePreorder (basis x) /\
    (forall y in basis x, WayBelow y x) /\
    x = @sSup a completeLatticeSupSet (basis x)

/-- A concrete countable algebraic lattice: `compact` enumerates exactly the
compact elements and `density` says that they generate every point. -/
structure CountablyAlgebraic (a : Type u) [CompleteLattice a] where
  compact : Nat -> a
  compact_isCompact : forall n, IsCompact (compact n)
  compact_complete : forall x, IsCompact x -> exists n, x = compact n
  density : forall x, x = @sSup a completeLatticeSupSet
    {k : a | IsCompact k} /\ @LE.le a completeLatticeLE k x}

/-- Suprema generated by finite parts of a set of basis indices. -/
def finiteBasisSups {a : Type u} [CompleteLattice a]
  (d : Nat -> a) (x : Set Nat) : Set a :=
  {y | exists t : Finset Nat, (t : Set Nat) subseq x /\
    y = sSup (d '' (t : Set Nat))}

theorem finiteBasisSups_directed {a : Type u} [CompleteLattice a]
  (d : Nat -> a) (x : Set Nat) :
  IsDirectedSet (finiteBasisSups d x) := by
  constructor
  * exact <sSup (d '' ({}) : Finset Nat) : Set Nat), {}, by simp, rfl>
  * rintro y <t, htx, rfl> z <u, hux, rfl>
  refine <sSup (d '' ((t U u : Finset Nat) : Set Nat)),
    <t U u, ?_, rfl>, ?_, ?_>
  * intro n hn
  simp only [Finset.coe_union, Set.mem_union] at hn
  exact hn.elim (fun h => htx h) (fun h => hux h)
  * apply sSup_le
  intro q hq
  apply le_sSup
  exact Set.image_mono (by
    intro n hn
    exact by simp [hn]) hq
  * apply sSup_le
  intro q hq
  apply le_sSup
  exact Set.image_mono (by
    intro n hn
    exact by simp [hn]) hq

theorem sSup_finiteBasisSups {a : Type u} [CompleteLattice a]
  (d : Nat -> a) (x : Set Nat) :
  sSup (finiteBasisSups d x) = sSup (d '' x) := by
  apply le_antisymm
  * apply sSup_le
  rintro y <t, htx, rfl>
  apply sSup_le
  intro q hq
  exact le_sSup (Set.image_mono htx hq)

```

```

* apply sSup_le
rintro _ <n, hn, rfl>
calc
  d n <= sSup (d '' ({n} : Finset Nat) : Set Nat)) :=
    le_sSup <n, by simp, rfl>
  _ <= sSup (finiteBasisSups d x) :=
    le_sSup <{n}, by simp, rfl>

theorem CountablyAlgebraic.compact_finite_support
  {a : Type u} [CompleteLattice a] (D : CountablyAlgebraic a)
  {m : Nat} {x : Set Nat}
  (h : D.compact m <= sSup (D.compact '' x)) :
  exists t : Finset Nat, (t : Set Nat) subseq x /\
    D.compact m <= sSup (D.compact '' (t : Set Nat)) := by
  have h' : D.compact m <= sSup (finiteBasisSups D.compact x) := by
    rwa [sSup_finiteBasisSups]
  obtain <y, <t, htx, rfl>, hmy> :=
    D.compact_isCompact m (finiteBasisSups D.compact x)
    (finiteBasisSups_directed D.compact x) h'
  exact <t, htx, hmy>

end Scott1976.DataTypesAsLattices

```

A.11 Scott1976/DataTypesAsLattices/Retracts.lean

1520 lines.

Lean 4 source (lines 1–400)

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/
import Scott1976.DataTypesAsLattices.FixedLattices
import Scott1976.DataTypesAsLattices.Lambda

/-!
# Scott 1976, S4 -- retracts and data types

Definitions of composition, retracts, `sqsub`, `comp` → ``, `?`, `?`, and
Theorems 4.1–4.6.
-/

namespace Scott1976.DataTypesAsLattices

/-- **Scott 1976, (4.5).** Composition `u comp v = fun x. u(v(x))`. -/
def comp (u v : Pomega) : Pomega :=
  graph (fun x => funOf u (funOf v x))

theorem comp_isScottContinuous_right (u : Pomega) :
  IsScottContinuous (fun v => comp u v) :=
  graph_const_isScottContinuous (fun v x => funOf u (funOf v x))
  (fun x => theorem_1_3 (funOf_isScottContinuous u) (funOf_isScottContinuous_left x))

theorem comp_app (u v x : Pomega) :
  funOf (comp u v) x = funOf u (funOf v x) :=
  beta (theorem_1_3 (funOf_isScottContinuous u) (funOf_isScottContinuous v)) x

/-- **Scott 1976, S4, Definition.** `a` is a retract iff `a = a comp a`. -/
def IsRetract (a : Pomega) : Prop :=
  a = comp a a

```

```

/-- The range / fixed-point set of a map. -/
def Fixpoints (f : Pomega -> Pomega) : Set Pomega :=
  {x | f x = x}

/-- Directedness of fixed points under subset, without a lattice instance. -/
def IsDirectedSubset {f : Pomega -> Pomega} (s : Set (Fixpoints f)) : Prop :=
  s.Nonempty /\
    forall ?x?, x in s -> forall ?y?, y in s ->
      exists z in s, (x : Pomega) subseq z /\ (y : Pomega) subseq z

/-- Compactness of a fixed point under subset, without a lattice instance. -/
def IsCompactSubset {f : Pomega -> Pomega} (x : Fixpoints f) : Prop :=
  forall s : Set (Fixpoints f),
    IsDirectedSubset s ->
      (x : Pomega) subseq ?_0 (Subtype.val '' s) ->
        exists z in s, (x : Pomega) subseq z

/-- **Scott 1976, S4, Definition.** `u : a` means `u = a(u)`. -/
def typed (u a : Pomega) : Prop :=
  u = funOf a u

/-- **Scott 1976, (4.1).** The function-space retract `fun = fun u fun x. u(x)`. -/
def funRetract : Pomega :=
  graph (fun u => graph (fun x => funOf u x))

theorem funRetract_app (u : Pomega) :
  funOf funRetract u = graph (fun x => funOf u x) :=
  beta (graph_const_isScottContinuous (fun u x => funOf u x)
    (fun x => funOf_isScottContinuous_left x)) u

/-- **Scott 1976, (4.8).** Function space of retracts `a comp -> b = fun u. b comp u comp a`. -/
def arrowR (a b : Pomega) : Pomega :=
  graph (fun u => comp b (comp u a))

/-- **Scott 1976, (4.14)-(4.15).** Projections of a pair-as-function. -/
def fstC : Pomega := graph (fun u => funOf u (ofNat 0))
def sndC : Pomega := graph (fun u => funOf u (ofNat 1))

theorem fstC_app (u : Pomega) : funOf fstC u = funOf u (ofNat 0) :=
  beta (funOf_isScottContinuous_left (ofNat 0)) u

theorem sndC_app (u : Pomega) : funOf sndC u = funOf u (ofNat 1) :=
  beta (funOf_isScottContinuous_left (ofNat 1)) u

/-- **Scott 1976, (2.21) / (4.2).** Pairing as a distributive sequence. -/
def pairSeq (x y : Pomega) : Pomega := seq2 x y

/-- **Scott 1976, (4.9).** Product of retracts `a ? b = fun u. <a(u_0), b(u_1)>`. -/
def tensorR (a b : Pomega) : Pomega :=
  graph (fun u =>
    pairSeq (funOf a (funOf u (ofNat 0))) (funOf b (funOf u (ofNat 1))))

/-- **Scott 1976, (4.10), modified.** The displayed equation writes the
ordinary McCarthy conditional `?`. Lean uses the doubly strict
conditional `??` of (4.4), as in `bool` (4.3), which (4.8)-(4.10)
generalize. Mixed tags therefore map to `top` rather than the union of
the two injections; that is required for `??` to be a retract
(Theorem 4.5). This is not a symbol-for-symbol transcription of the
displayed (4.10). -/
def plusR (a b : Pomega) : Pomega :=
  graph (fun u =>
    dcondSet (funOf u (ofNat 0))

```

```

    (pairSeq (ofNat 0) (funOf a (funOf u (ofNat 1))))
    (pairSeq (ofNat 1) (funOf b (funOf u (ofNat 1)))))

/-- **Scott 1976, S4, Definition.** `a` sqsub `b` iff `a = a comp b = b comp a`. -/
def retractLe (a b : Pomega) : Prop :=
  a = comp a b /\ a = comp b a

theorem retractLe_refl {a : Pomega} (ha : IsRetract a) : retractLe a a :=
  <ha, ha>

theorem retractLe_trans {a b c : Pomega}
  (hab : retractLe a b) (hbc : retractLe b c) :
  a = comp a c /\ a = comp c a := by
  rcases hab with <hab_1, hab_2>
  rcases hbc with <hbc_1, hbc_2>
  constructor
  * -- `a comp c = (a comp b) comp c = a comp (b comp c) = a comp b = a`
    apply Eq.trans hab_1
    apply Eq.symm
    calc
      comp a c = graph (fun x => funOf a (funOf c x)) := rfl
      _ = graph (fun x => funOf (comp a b) (funOf c x)) := by simp [ <- hab_1]
      _ = graph (fun x => funOf a (funOf b (funOf c x))) := by simp [comp_app]
      _ = graph (fun x => funOf a (funOf (comp b c) x)) := by simp [comp_app]
      _ = graph (fun x => funOf a (funOf b x)) := by simp [ <- hbc_1]
      _ = comp a b := rfl
  * -- `c comp a = c comp (b comp a) = (c comp b) comp a = b comp a = a`
    apply Eq.trans hab_2
    apply Eq.symm
    calc
      comp c a = graph (fun x => funOf c (funOf a x)) := rfl
      _ = graph (fun x => funOf c (funOf (comp b a) x)) := by simp [ <- hab_2]
      _ = graph (fun x => funOf c (funOf b (funOf a x))) := by simp [comp_app]
      _ = graph (fun x => funOf (comp c b) (funOf a x)) := by simp [comp_app]
      _ = graph (fun x => funOf b (funOf a x)) := by
        -- `c comp b = b` is `hbc_2`? `retractLe b c` is `b = b comp c` and `b = c comp b`
        simp [ <- hbc_2]
      _ = comp b a := rfl

/-- **Scott 1976, Theorem 4.2 (The partial ordering theorem).** -/
theorem theorem_4_2 {a b c : Pomega} :
  (IsRetract a -> retractLe a a) /\
  (retractLe a b -> retractLe b a -> a = b) /\
  (retractLe a b -> retractLe b c -> retractLe a c) := by
  refine <retractLe_refl, ?_, ?_>
  * intro hab hba
    exact hab.1.trans (hba.2.symm)
  * intro hab hbc
    exact retractLe_trans hab hbc

/-- Directed iterates of `f` starting from `x` (Scott's sup construction). -/
def iterateFrom (f : Pomega -> Pomega) (x : Pomega) : Nat -> Pomega
| 0 => x
| n + 1 => f (iterateFrom f x n)

/-- Least upper bound of fixed points above `x`: `?_n f?(x)`. -/
def lfpAbove (f : Pomega -> Pomega) (x : Pomega) : Pomega :=
  ?_n, iterateFrom f x n

/-- Greatest postfix point of `z` |-> `f z` I `b` (Knaster-Tarski inf below `b`). -/
def gfpBelow (f : Pomega -> Pomega) (b : Pomega) : Pomega :=
  ?_0 {x | x subseq f x I b}

```



```

/-- The identity combinator `I = fun u. u`, the largest retract. -/
def Icomb : Pomega := graph (fun x => x)

theorem Icomb_app (x : Pomega) : funOf Icomb x = x :=
  beta id_isScottContinuous x

theorem Icomb_isRetract : IsRetract Icomb := by
  change Icomb = graph (fun x => funOf Icomb (funOf Icomb x))
  have : (fun x => funOf Icomb (funOf Icomb x)) = fun x => x := by
    funext x
    simp [Icomb_app]
  rw [this]
  rfl

theorem inter_const_isScottContinuous {f : Pomega -> Pomega}
  (hf : IsScottContinuous f) (b : Pomega) :
  IsScottContinuous (fun z => f z I b) := by
  intro x
  ext k
  constructor
  * intro <hkf, hkb>
    have : k in scottUnion f x := by rwa [ <- hf x]
    obtain <n, hn, hkn> := mem_scottUnion.mp this
    exact mem_scottUnion.mpr <n, hn, hkn, hkb>
  * intro hk
    obtain <n, hn, hkn, hkb> := mem_scottUnion.mp hk
    exact <isScottContinuous_monotone hf hn hkn, hkb>

theorem iterateFrom_mono {f : Pomega -> Pomega} (hf : IsScottContinuous f)
  {x : Pomega} (hx : x subseq f x) :
  forall n, iterateFrom f x n subseq iterateFrom f x (n + 1)
| 0 => hx
| n + 1 => isScottContinuous_monotone hf (iterateFrom_mono hf hx n)

theorem iterateFrom_bot (f : Pomega -> Pomega) (n : Nat) :
  iterateFrom f botElem n = iterateBot f n := by
  induction n with
  | zero => rfl
  | succ n ih => simp [iterateFrom, iterateBot, ih]

theorem lfpAbove_bot (f : Pomega -> Pomega) : lfpAbove f botElem = fix f := by
  simp [lfpAbove, fix, iterateFrom_bot]

theorem sUnion_Fixpoints_le_image {f : Pomega -> Pomega} (hf : IsScottContinuous f)
  {A : Set Pomega} (hA : A subseq Fixpoints f) :
  ?_0 A subseq f (?_0 A) := by
  intro k hk
  obtain <x, hxA, hxx> := Set.mem_sUnion.mp hk
  have hx : f x = x := hA hxA
  have : k in f x := by rwa [hx]
  exact isScottContinuous_monotone hf (Set.subset_sUnion_of_mem hxA) this

theorem lfpAbove_fixed {f : Pomega -> Pomega} (hf : IsScottContinuous f)
  {x : Pomega} (hx : x subseq f x) : f (lfpAbove f x) = lfpAbove f x := by
  have hchain := chain_lemma hf (iterateFrom f x) (iterateFrom_mono hf hx)
  unfold lfpAbove
  rw [hchain]
  ext k
  constructor
  * intro hk
    obtain <n, hkn> := Set.mem_iUnion.mp hk
    exact Set.mem_iUnion.mpr <n + 1, hkn>

```

```

* intro hk
  obtain <n, hkn> := Set.mem_iUnion.mp hk
  cases n with
  | zero => exact Set.mem_iUnion.mpr <0, hx hkn>
  | succ n => exact Set.mem_iUnion.mpr <n, hkn>

theorem lfpAbove_ub {f : Pomega -> Pomega} {A : Set Pomega} :
  forall x in A, x subseq lfpAbove f (?_0 A) := by
  intro x hx k hk
  exact Set.mem_iUnion.mpr <0, Set.subseq_sUnion_of_mem hx hk>

theorem lfpAbove_le_of_ub {f : Pomega -> Pomega} (hf : IsScottContinuous f)
  {A : Set Pomega} {z : Pomega} (hz : f z = z) (hub : forall x in A, x subseq z) :
  lfpAbove f (?_0 A) subseq z := by
  have h0 : ?_0 A subseq z := by
    intro k hk
    obtain <x, hxA, hkx> := Set.mem_sUnion.mp hk
    exact hub x hxA hkx
  have hiter : forall n, iterateFrom f (?_0 A) n subseq z := by
    intro n
    induction n with
    | zero => simpa [iterateFrom] using h0
    | succ n ih => simpa [iterateFrom, hz] using isScottContinuous_monotone hf ih
  intro k hk
  obtain <n, hkn> := Set.mem_iUnion.mp hk
  exact hiter n hkn

theorem lfpAbove_mem {f : Pomega -> Pomega} (hf : IsScottContinuous f)
  {A : Set Pomega} (hA : A subseq Fixpoints f) :
  lfpAbove f (?_0 A) in Fixpoints f :=
  lfpAbove_fixed hf (sUnion_Fixpoints_le_image hf hA)

theorem gfpBelow_le {f : Pomega -> Pomega} (hf : IsScottContinuous f) (b : Pomega)
  (_hb : f b subseq b) : gfpBelow f b subseq b := by
  intro k hk
  obtain <x, hx, hkx> := Set.mem_sUnion.mp hk
  exact (hx hkx).2

theorem gfpBelow_subset (f : Pomega -> Pomega) (b : Pomega) :
  gfpBelow f b subseq b := by
  intro k hk
  obtain <x, hx, hkx> := Set.mem_sUnion.mp hk
  exact (hx hkx).2

theorem gfpBelow_postfixed {f : Pomega -> Pomega} (hf : IsScottContinuous f)
  (b : Pomega) : gfpBelow f b subseq f (gfpBelow f b) I b := by
  intro k hk
  obtain <x, hx, hkx> := Set.mem_sUnion.mp hk
  have hxz : x subseq gfpBelow f b := fun _ hm => Set.mem_sUnion.mpr <x, hx, hm>
  exact <isScottContinuous_monotone hf hxz (hx hkx).1, (hx hkx).2>

theorem gfpBelow_fixed_inter {f : Pomega -> Pomega} (hf : IsScottContinuous f)
  (b : Pomega) : f (gfpBelow f b) I b = gfpBelow f b := by
  apply subset_antisymm
  * intro k hk
    refine Set.mem_sUnion.mpr <f (gfpBelow f b) I b, ?_, hk>
    have hle : gfpBelow f b subseq f (gfpBelow f b) I b := gfpBelow_postfixed hf b
    have : f (gfpBelow f b) subseq f (f (gfpBelow f b) I b) :=
      isScottContinuous_monotone hf hle
    intro m hm
    exact <this hm.1, hm.2>
  * exact gfpBelow_postfixed hf b

```

```

/-- **Scott 1976, Theorem 4.1 (The lattice theorem), complete-lattice half.**
The inf `gfpBelow f (? A)` is a fixed point of `f` itself. -/
theorem theorem_4_1_complete (f : Pomega -> Pomega) (hf : IsScottContinuous f)
  (A : Set Pomega) (hA : A subseqeq Fixpoints f) :
  gfpBelow f (?_0 A) in Fixpoints f := by
  let z := gfpBelow f (?_0 A)
  have hinter : f z I ?_0 A = z := gfpBelow_fixed_inter hf (?_0 A)
  have hzle : z subseqeq ?_0 A := gfpBelow_subset f (?_0 A)
  have hfz : f z subseqeq ?_0 A := by
    intro k hk y hy
    have hzy : z subseqeq y := subset_trans hzle (Set.sInter_subset_of_mem hy)
    have : k in f y := isScottContinuous_monotone hf hzy hk
    have hyf : f y = y := hA hy
    rwa [hyf] at this
  have : f z I ?_0 A = f z := Set.inter_eq_left.mpr hfz
  change f z = z
  rwa [this] at hinter

theorem gfpBelow_isGLB {f : Pomega -> Pomega} (_hf : IsScottContinuous f)
  {A : Set Pomega} (_hA : A subseqeq Fixpoints f) {z : Pomega}
  (hz : f z = z) (h1b : forall x in A, z subseqeq x) :
  z subseqeq gfpBelow f (?_0 A) := by
  have hzI : z subseqeq ?_0 A := fun k hk y hy => h1b y hy hk
  have hpost : z subseqeq f z I ?_0 A := fun k hk => <by rwa [hz], hzI hk>
  exact fun k hk => Set.mem_sUnion.mpr <z, hpost, hk>

/-- Continuous-lattice interpolation: `x = ? { a(e n) | e n subseqeq x }`. -/
theorem retract_interpolation {a x : Pomega} (_ha : IsRetract a) (hx : typed x a) :
  x = ? n, {k | e n subseqeq x /\ k in funOf a (e n)} := by
  have hx' : funOf a x = x := hx.symm
  have hsc := funOf_isScottContinuous a x
  apply subset_antisymm
  * intro k hk
    have : k in funOf a x := by rwa [hx']
    have : k in scottUnion (funOf a) x := by rwa [ <- hsc]
    obtain <n, hn, hkn> := mem_scottUnion.mp this
    exact Set.mem_iUnion.mpr <n, hn, hkn>
  * intro k hk
    obtain <n, hn, hkn> := Set.mem_iUnion.mp hk
    have : k in funOf a x :=
      isScottContinuous_monotone (funOf_isScottContinuous a) hn hkn
    rwa [hx'] at this

/-- Image of a set of fixed-point subtypes. -/
def Fixpoints.vals {f : Pomega -> Pomega} (A : Set (Fixpoints f)) : Set Pomega :=
  Subtype.val '' A

theorem Fixpoints.vals_subset {f : Pomega -> Pomega} (A : Set (Fixpoints f)) :
  Fixpoints.vals A subseqeq Fixpoints f := by
  intro x hx
  obtain <y, _, rfl> := hx
  exact y.property

/-- Scott's complete lattice of fixed points. -/
@[instance_reducible]
def fixpointsCompleteLattice {f : Pomega -> Pomega} (hf : IsScottContinuous f) :
  CompleteLattice (Fixpoints f) :=
  letI : SupSet (Fixpoints f) :=
    <fun A => <lfpAbove f (?_0 (Fixpoints.vals A)),
      lfpAbove_mem hf (Fixpoints.vals_subset A)>>
  { completeLatticeOfSup (Fixpoints f) (fun A => by
    refine <?ub, ?least>
    * intro x hx

```

```

    change (x : Pomega) subseq lfpAbove f (?_0 (Fixpoints.vals A))
    exact lfpAbove_ub x.val <x, hx, rfl>
* intro z hz
    change lfpAbove f (?_0 (Fixpoints.vals A)) subseq z
    exact lfpAbove_le_of_ub hf z.property (fun y hy => by
      obtain <w, hwA, rfl> := hy
      exact hz hwA)) with
sInf := fun A => <gfpBelow f (?_0 (Fixpoints.vals A)),
  theorem_4_1_complete f hf (Fixpoints.vals A) (Fixpoints.vals_subset A)>
isGLB_sInf := fun A => by
  refine <?lb, ?greatest>
* intro x hx
    change gfpBelow f (?_0 (Fixpoints.vals A)) subseq x
    exact subset_trans (gfpBelow_subset f _)
      (Set.sInter_subset_of_mem <x, hx, rfl>)
* intro z hz
    change (z : Pomega) subseq gfpBelow f (?_0 (Fixpoints.vals A))
    exact gfpBelow_isGLB hf (Fixpoints.vals_subset A) z.property (fun y hy => by
      obtain <w, hwA, rfl> := hy
      exact hz hwA)
bot := <fix f, (theorem_1_4 hf).1>
bot_le := fun x => (theorem_1_4 hf).2 x.val x.property }

noncomputable instance fixpointsFunOfCompleteLattice (a : Pomega) :
  CompleteLattice (Fixpoints (funOf a)) :=
  fixpointsCompleteLattice (funOf_isScottContinuous a)

theorem retract_app {a : Pomega} (ha : IsRetract a) (x : Pomega) :
  funOf a (funOf a x) = funOf a x := by
  have := congrArg (fun u => funOf u x) ha
  simpa [comp_app] using this.symm

theorem directed_finite_cover {A : Set (Fixpoints f)}
  (hA : IsDirectedSet A) {t : Pomega} (ht : t.Finite)
  (hsb : t subseq ?_0 (Fixpoints.vals A)) :
  exists z in A, t subseq z := by
  classical
  have aux : forall s : Finset Nat,
    (s : Set Nat) subseq ?_0 (Fixpoints.vals A) ->
      exists z in A, (s : Set Nat) subseq z := by
  intro s
  induction s using Finset.induction with
  | empty =>
    intro _
    obtain <z, hz> := hA.1
    exact <z, hz, by simp>
  | insert k s hks ih =>
    intro hs
    obtain <u, hu, hsu> :=
      ih (fun m hm => hs (by simp [hm]))
    obtain <v, hv, hkv> :=
      Set.mem_sUnion.mp
        (hs (show k in (insert k s : Finset Nat) by simp))

```

Lean 4 source (lines 401–800)

```

    obtain <v', hv'A, rfl> := hv
    obtain <z, hz, huz, hvz> := hA.2 hu hv'A
    refine <z, hz, ?_>
    intro m hm
    simp only [Finset.coe_insert, Set.mem_insert_iff] at hm
    rcases hm with rfl | hm
    * exact hvz hkv
    * exact huz (hsu hm)

```

```

obtain <z, hzA, hz> := aux ht.toFinset (by simp using hsub)
exact <z, hzA, fun m hm => hz (by simp using hm)>

theorem directed_sUnion_fixed {f : Pomega -> Pomega} (hf : IsScottContinuous f)
  {A : Set (Fixpoints f)} (hA : IsDirectedSet A) :
  ?_0 (Fixpoints.vals A) in Fixpoints f := by
  apply subset_antisymm
  * intro k hk
    have hk' : k in scottUnion f (?_0 (Fixpoints.vals A)) := by
      rwa [ <- hf (?_0 (Fixpoints.vals A))]
    obtain <n, hn, hkn> := mem_scottUnion.mp hk'
    obtain <z, hzA, hnz> :=
      directed_finite_cover hA (e_finite n) hn
    have : k in f z :=
      isScottContinuous_monotone hf hnz hkn
    rw [z.property] at this
    exact Set.mem_sUnion.mpr <z, <z, hzA, rfl>, this>
  * exact sUnion_Fixpoints_le_image hf (Fixpoints.vals_subset A)

theorem sSup_fixed_eq_sUnion {f : Pomega -> Pomega} (hf : IsScottContinuous f)
  {A : Set (Fixpoints f)} (hA : IsDirectedSet A) :
  ((@sSup (Fixpoints f) (fixpointsCompleteLattice hf)).toSupSet A :
    Fixpoints f) : Pomega) =
  ?_0 (Fixpoints.vals A) := by
  let I := fixpointsCompleteLattice hf
  let u : Fixpoints f :=
    <?_0 (Fixpoints.vals A), directed_sUnion_fixed hf hA>
  apply subset_antisymm
  * have hle : sSup A <= u := by
      apply sSup_le
      intro x hx
      exact Set.subset_sUnion_of_mem <x, hx, rfl>
    exact hle
  * intro k hk
    obtain <x, hxA, hxx> := Set.mem_sUnion.mp hk
    obtain <y, hyA, rfl> := hxA
    exact (le_sSup hyA) hxx

/-- The canonical finite-image basis of the fixed-point lattice of a retract. -/
def retractBasis (a : Pomega) (x : Fixpoints (funOf a)) :
  Set (Fixpoints (funOf a)) :=
  {y | exists n, e n subseteq x /\ (y : Pomega) = funOf a (e n)}

theorem retractBasis_directed {a : Pomega} (ha : IsRetract a)
  (x : Fixpoints (funOf a)) :
  IsDirectedSet (retractBasis a x) := by
  constructor
  * let y : Fixpoints (funOf a) :=
      <funOf a (e 0), retract_app ha (e 0)>
    exact <y, 0, by simp [e_zero], rfl>
  * intro y hy z hz
    obtain <n, hnx, hyn> := hy
    obtain <m, hmx, hzm> := hz
    let w : Fixpoints (funOf a) :=
      <funOf a (e (n ||| m)), retract_app ha (e (n ||| m))>
    refine <w, <n ||| m, e_or_of_subset hnx hmx, rfl>, ?_, ?_>
  * change (y : Pomega) subseteq (w : Pomega)
    rw [hyn]
    change funOf a (e n) subseteq funOf a (e (n ||| m))
    rw [e_or]
    exact isScottContinuous_monotone (funOf_isScottContinuous a)
      Set.subset_union_left
  * change (z : Pomega) subseteq (w : Pomega)

```

```

    rw [hzm]
    change funOf a (e m) subseq funOf a (e (n ||| m))
    rw [e_or]
    exact isScottContinuous_monotone (funOf_isScottContinuous a)
      Set.subset_union_right

theorem retractBasis_wayBelow {a : Pomega} (ha : IsRetract a)
  {x y : Fixpoints (funOf a)} (hy : y in retractBasis a x) :
  WayBelow y x := by
  intro A hA hxA
  obtain <n, hnx, hyn> := hy
  have hsup :
    ((sSup A : Fixpoints (funOf a)) : Pomega) =
      ?_0 (Fixpoints.vals A) :=
    sSup_fixed_eq_sUnion (funOf_isScottContinuous a) hA
  have hfinite :
    e n subseq ?_0 (Fixpoints.vals A) := by
    rw [← hsup]
    exact hnx.trans hxA
  obtain <z, hzA, hnz> :=
    directed_finite_cover hA (e_finite n) hfinite
  refine <z, hzA, ?_>
  change (y : Pomega) subseq z
  rw [hyn]
  have := isScottContinuous_monotone (funOf_isScottContinuous a) hnz
  rwa [z.property] at this

theorem retractBasis_sSup {a : Pomega} (ha : IsRetract a)
  (x : Fixpoints (funOf a)) :
  x = sSup (retractBasis a x) := by
  apply Subtype.ext
  rw [sSup_fixed_eq_sUnion (funOf_isScottContinuous a)
    (retractBasis_directed ha x)]
  have hx : typed (x : Pomega) a := x.property.symm
  rw [retract_interpolation ha hx]
  ext k
  constructor
  * intro hk
    obtain <n, hnx, hkn> := Set.mem_iUnion.mp hk
    let y : Fixpoints (funOf a) :=
      <funOf a (e n), retract_app ha (e n)>
    exact Set.mem_sUnion.mpr
      <y, <y, <n, hnx, rfl>, rfl>, hkn>
  * intro hk
    obtain <_, <y, <n, hnx, hyn>, rfl>, hky> :=
      Set.mem_sUnion.mp hk
    exact Set.mem_iUnion.mpr <n, hnx, hyn |> hky>

theorem retractBasis_sUnion {a : Pomega} (ha : IsRetract a)
  (x : Fixpoints (funOf a)) :
  (x : Pomega) = ?_0 (Subtype.val '' retractBasis a x) := by
  have h := retractBasis_sSup ha x
  have hsu := sSup_fixed_eq_sUnion (funOf_isScottContinuous a)
    (retractBasis_directed ha x)
  have : (x : Pomega) = (sSup (retractBasis a x) : Fixpoints (funOf a)) :=
    congrArg Subtype.val h
  exact this.trans hsu

theorem retractBasis_directedSubset {a : Pomega} (ha : IsRetract a)
  (x : Fixpoints (funOf a)) :
  IsDirectedSubset (retractBasis a x) := by
  have h := retractBasis_directed ha x
  refine <h.1, ?_>

```

```

intro y hy z hz
obtain <w, hw, hyw, hzw> := h.2 hy hz
exact <w, hw, hyw, hzw>

/-- **Scott 1976, Theorem 4.1, continuous-lattice half.**
The finite-image points form a directed way-below basis for every point in
the range of a retract. Stated with subset directedness so the compared
type does not mention a `CompleteLattice` instance. -/
theorem theorem_4_1_continuous {a : Pomega} (ha : IsRetract a) :
  forall x : Fixpoints (funOf a),
    IsDirectedSubset (retractBasis a x) /\
      (x : Pomega) = ?_0 (Subtype.val '' retractBasis a x) /\
        forall y in retractBasis a x,
          forall s : Set (Fixpoints (funOf a)),
            IsDirectedSubset s ->
              (x : Pomega) subseq ?_0 (Subtype.val '' s) ->
                exists z in s, (y : Pomega) subseq z := by
intro x
refine <retractBasis_directedSubset ha x, retractBasis_sUnion ha x, ?_>
intro y hy s hs hxs
obtain <n, hnx, hyn> := hy
have hen : e n subseq ?_0 (Subtype.val '' s) := hnx.trans hxs
have hs' : IsDirectedSet s :=
  <hs.1, fun u hu v hv => by
    obtain <w, hw, huw, hvw> := hs.2 hu hv
    exact <w, hw, huw, hvw>>
obtain <z, hz, hnz> :=
  directed_finite_cover hs' (e_finite n) (by simp [Fixpoints.vals] using hen)
refine <z, hz, ?_>
change (y : Pomega) subseq z
rw [hyn]
have := isScottContinuous_monotone (funOf_isScottContinuous a) hnz
rwa [z.property] at this

/-- **Scott 1976, Theorem 4.1 (The lattice theorem).**
Fixed points of a continuous function form a complete lattice under `subseq`;
those of a retract form a continuous lattice. -/
theorem theorem_4_1 {f : Pomega -> Pomega} (hf : IsScottContinuous f) :
  (forall A : Set Pomega, A subseq Fixpoints f ->
    gfpBelow f (?_0 A) in Fixpoints f /\
      lfpAbove f (?_0 A) in Fixpoints f) /\
    forall {a} (ha : IsRetract a),
      Fixpoints (funOf a) = {x | typed x a} /\
        forall x : Fixpoints (funOf a),
          IsDirectedSubset (retractBasis a x) /\
            (x : Pomega) = ?_0 (Subtype.val '' retractBasis a x) := by
constructor
* intro A hA
  exact <theorem_4_1_complete f hf A hA, lfpAbove_mem hf hA>
* intro a ha
  constructor
  * ext x
    simp [Fixpoints, typed, eq_comm]
  * intro x
    exact <retractBasis_directedSubset ha x, retractBasis_sUnion ha x>

theorem graph_ext {f g : Pomega -> Pomega} (h : forall x, f x = g x) :
  graph f = graph g := by
  simp [graph, h]

theorem funRetract_isRetract : IsRetract funRetract := by
  apply graph_ext
  intro u

```

```

rw [funRetract_app, funRetract_app]
apply graph_ext
intro x
exact (beta (funOf_isScottContinuous u) x).symm

theorem comp_right_const (a : Pomega) :
  IsScottContinuous (fun u => comp u a) :=
  graph_const_isScottContinuous (fun u x => funOf u (funOf a x))
  (fun x => funOf_isScottContinuous_left (funOf a x))

theorem arrowR_map_isScottContinuous (a b : Pomega) :
  IsScottContinuous (fun u => comp b (comp u a)) :=
  theorem_1_3 (comp_isScottContinuous_right b) (comp_right_const a)

theorem arrowR_app (a b u : Pomega) :
  funOf (arrowR a b) u = comp b (comp u a) :=
  beta (arrowR_map_isScottContinuous a b) u

/-- **Scott 1976, Theorem 4.3 (i).** On elements, `a comp -> b` acts as `b comp ? comp a`
  `,
and that action is idempotent when `a, b` are retracts. -/
theorem theorem_4_3_i {a b u : Pomega} (ha : IsRetract a) (hb : IsRetract b) :
  funOf (arrowR a b) (funOf (arrowR a b) u) = funOf (arrowR a b) u := by
  rw [arrowR_app, arrowR_app]
  apply graph_ext
  intro x
  simp [comp_app, retract_app ha, retract_app hb]

/-- **Scott 1976, (4.11).** Action of composed function-space retracts. -/
theorem eq_4_11 (a b a' b' u : Pomega) :
  funOf (arrowR a b) (funOf (arrowR a' b') u) =
  comp b (comp (comp b' (comp u a')) a) := by
  rw [arrowR_app, arrowR_app]

/-- **Scott 1976, Theorem 4.3 (ii).** `u : a comp -> b` means `u` is restricted
to `a` and takes values in `b`. -/
theorem theorem_4_3_ii {a b u x : Pomega}
  (hu : typed u (arrowR a b)) (hx : typed x a) :
  typed (funOf u x) b := by
  have hu' : u = comp b (comp u a) := by
    simp [typed, arrowR_app] using hu
  have : funOf u x = funOf b (funOf u (funOf a x)) := by
    have h1 : funOf u x = funOf (comp b (comp u a)) x :=
      congrArg (fun w => funOf w x) hu'
    rw [h1, comp_app, comp_app]
  rwa [show funOf a x = x from hx.symm] at this

theorem funOf_botElem (x : Pomega) : funOf botElem x = botElem := by
  ext m
  simp [funOf, botElem]

theorem graph_const_bot : graph (fun _ => botElem) = botElem := by
  ext p
  simp [graph, botElem]

/-- Strictness: `a(False) = False`, equivalently `False sqsub a` for retracts. -/
def IsStrict (a : Pomega) : Prop :=
  funOf a botElem = botElem

theorem typed_of_arrowR {a b u : Pomega} (hu : typed u (arrowR a b)) :
  u = comp b (comp u a) := by
  simp [typed, arrowR_app] using hu

```



```

theorem typed_arrowR_restrict {a b u : Pomega}
  (ha : IsRetract a) (hu : typed u (arrowR a b)) :
  u = comp u a := by
  have hu' := typed_of_arrowR hu
  have h : comp (comp b (comp u a)) a = comp b (comp u a) := by
    apply graph_ext
    intro x
    simp only [comp_app]
    rw [retract_app ha]
  have : comp u a = comp (comp b (comp u a)) a := by
    conv_lhs => rw [hu']
  exact ((this.trans h).trans hu'.symm).symm

theorem typed_arrowR_range {a b u : Pomega}
  (hb : IsRetract b) (hu : typed u (arrowR a b)) :
  u = comp b u := by
  have hu' := typed_of_arrowR hu
  rw [hu']
  apply graph_ext
  intro x
  simp only [comp_app]
  rw [retract_app hb]

/-- **Scott 1976, (4.11).** Composition of function-space retracts. -/
theorem eq_4_11_comp (a b a' b' : Pomega) :
  comp (arrowR a b) (arrowR a' b') = arrowR (comp a' a) (comp b b') := by
  apply graph_ext
  intro u
  calc
    funOf (arrowR a b) (funOf (arrowR a' b') u)
      = comp b (comp (funOf (arrowR a' b') u) a) := arrowR_app _ _ _
    _ = comp b (comp (comp b' (comp u a')) a) := by rw [arrowR_app]
    _ = comp (comp b b') (comp u (comp a' a)) := by
      apply graph_ext
      intro x
      simp only [comp_app]

theorem arrowR_isRetract {a b : Pomega} (ha : IsRetract a) (hb : IsRetract b) :
  IsRetract (arrowR a b) := by
  change arrowR a b =
    graph (fun x => funOf (arrowR a b) (funOf (arrowR a b) x))
  apply graph_ext
  intro u
  rw [theorem_4_3_i ha hb, arrowR_app]

theorem arrowR_isStrict {a b : Pomega} (hb : IsStrict b) :
  IsStrict (arrowR a b) := by
  change funOf (arrowR a b) botElem = botElem
  rw [arrowR_app]
  have hbot : comp botElem a = botElem := by
    unfold comp
    simp [funOf_botElem, graph_const_bot]
  rw [hbot]
  unfold comp
  simp only [funOf_botElem]
  exact (congrArg graph (funext fun _ => hb)).trans graph_const_bot

theorem typed_arrowR_iff {a b u : Pomega} (ha : IsRetract a) (_hb : IsRetract b) :
  typed u (arrowR a b) <=>
  u = comp u a /\ forall x, typed x a -> typed (funOf u x) b := by
  constructor
  * intro hu
  exact <typed_arrowR_restrict ha hu, fun x hx => theorem_4_3_ii hu hx>

```

```

* intro <hrest, hval>
  change u = funOf (arrowR a b) u
  rw [arrowR_app]
  apply Eq.trans hrest
  apply graph_ext
  intro x
  have hx : typed (funOf a x) a := (retract_app ha x).symm
  have hbx : funOf u (funOf a x) = funOf b (funOf u (funOf a x)) :=
    hval (funOf a x) hx
  simp only [comp_app]
  exact hbx

theorem arrowR_retractLe {a b a' b' : Pomega}
  (hab : retractLe a a') (hbb : retractLe b b') :
  retractLe (arrowR a b) (arrowR a' b') := by
  constructor
  * have h : arrowR (comp a' a) (comp b b') = arrowR a b := by
    rw [← hab.2, ← hbb.1]
    exact (h.symm.trans (eq_4_11_comp a b a' b')).symm
  * have h : arrowR (comp a a') (comp b' b) = arrowR a b := by
    rw [← hab.1, ← hbb.2]
    exact (h.symm.trans (eq_4_11_comp a' b' a b)).symm

theorem arrowR_functor {a b a' b' f f' : Pomega}
  (hf : typed f (arrowR a b)) (hf' : typed f' (arrowR a' b')) :
  typed (arrowR f f') (arrowR (arrowR b a') (arrowR a b')) := by
  change arrowR f f' =
    funOf (arrowR (arrowR b a') (arrowR a b')) (arrowR f f')
  rw [arrowR_app]
  have inner := eq_4_11_comp f f' b a'
  have outer := eq_4_11_comp a b' (comp b f) (comp f' a')
  have hf1 := typed_of_arrowR hf
  have hf2 := typed_of_arrowR hf'
  apply Eq.symm
  calc
    comp (arrowR a b') (comp (arrowR f f') (arrowR b a'))
      = comp (arrowR a b') (arrowR (comp b f) (comp f' a')) := by rw [inner]
    _ = arrowR (comp (comp b f) a) (comp b' (comp f' a')) := outer
    _ = arrowR f f' := by
      apply graph_ext
      intro u
      apply graph_ext
      intro x
      have hfx : funOf f x = funOf b (funOf f (funOf a x)) := by
        simpa [comp_app] using congrArg (fun w => funOf w x) hf1
      have hf'y : forall y, funOf f' y = funOf b' (funOf f' (funOf a' y)) := by
        intro y
        simpa [comp_app] using congrArg (fun w => funOf w y) hf2
      simp only [arrowR_app, comp_app]
      rw [hfx]
      exact (hf'y _).symm

theorem typed_comp {a b c f f' : Pomega}
  (ha : IsRetract a) (hb : IsRetract b) (_hc : IsRetract c)
  (hf : typed f (arrowR a b)) (hf' : typed f' (arrowR b c)) :
  typed (comp f' f) (arrowR a c) := by
  have hf1 := typed_of_arrowR hf
  have hf2 := typed_of_arrowR hf'
  change comp f' f = funOf (arrowR a c) (comp f' f)
  rw [arrowR_app]
  apply graph_ext
  intro x
  have hfx : funOf f x = funOf b (funOf f (funOf a x)) := by

```

```

    simp [comp_app] using congrArg (fun w => funOf w x) hf1
  have hrest := typed_arrowR_restrict ha hf
  have hfa : funOf f (funOf a x) = funOf f x := by
    simp [comp_app] using (congrArg (fun w => funOf w x) hrest).symm
  have hf'fx : funOf f' (funOf f x) =
    funOf c (funOf f' (funOf b (funOf f x))) := by
    simp [comp_app] using congrArg (fun w => funOf w (funOf f x)) hf2
  have hrange := typed_arrowR_range hb hf
  have hbval : funOf b (funOf f (funOf a x)) = funOf f (funOf a x) := by
    simp [comp_app] using (congrArg (fun w => funOf w (funOf a x)) hrange).symm
  simp only [comp_app]
  rw [hf'fx, <- hfa, hbval, hfa]

/-- **Scott 1976, Theorem 4.3 (The function space theorem).** -/
theorem theorem_4_3 {a b a' b' c : Pomega}

```

Lean 4 source (lines 801–1200)

```

  (ha : IsRetract a) (hb : IsRetract b) (_ha' : IsRetract a')
  (_hb' : IsRetract b') (hc : IsRetract c) :
  IsRetract (arrowR a b) /\
    (IsStrict b -> IsStrict (arrowR a b)) /\
    (forall u, typed u (arrowR a b) <=>
      u = comp u a /\ forall x, typed x a -> typed (funOf u x) b) /\
    (retractLe a a' -> retractLe b b' ->
      retractLe (arrowR a b) (arrowR a' b')) /\
    (forall f f', typed f (arrowR a b) -> typed f' (arrowR a' b') ->
      typed (arrowR f f') (arrowR (arrowR b a') (arrowR a b'))) /\
    (forall f f', typed f (arrowR a b) -> typed f' (arrowR b c) ->
      typed (comp f' f) (arrowR a c)) :=
  <arrowR_isRetract ha hb, arrowR_isStrict, fun _ => typed_arrowR_iff ha hb,
  arrowR_retractLe, fun _ _ => arrowR_functor,
  fun _ _ hf hf' => typed_comp ha hb hc hf hf'>

/-- **Scott 1976, (4.16).** Diagonal combinator. -/
def diagC : Pomega := graph (fun u => pairSeq u u)

/-- **Scott 1976, (4.22).** Evaluation combinator. -/
def evalC : Pomega :=
  graph (fun u => funOf (funOf u (ofNat 0)) (funOf u (ofNat 1)))

/-- **Scott 1976, (4.23).** Currying combinator. -/
def curryC : Pomega :=
  graph (fun u => graph (fun x => graph (fun y => funOf u (pairSeq x y))))

/-- **Scott 1976, (4.7).** The integer functional
`int(u) = u ? 0, (int(u?1) ? u, u)` -/
def intF (f : Pomega) : Pomega :=
  graph (fun u =>
    dcondSet u (ofNat 0) (dcondSet (funOf f (predSet u)) u u))

theorem intF_map_isScottContinuous (f : Pomega) :
  IsScottContinuous (fun u =>
    dcondSet u (ofNat 0) (dcondSet (funOf f (predSet u)) u u)) :=
  theorem_1_3_nary
    (fun y z => dcondSet_isScottContinuous_left y z)
    (fun x z => dcondSet_isScottContinuous_mid x z)
    (fun x y => dcondSet_isScottContinuous_right x y)
    id_isScottContinuous
    (const_isScottContinuous (ofNat 0))
    (theorem_1_3_nary
      (fun y z => dcondSet_isScottContinuous_left y z)
      (fun x z => dcondSet_isScottContinuous_mid x z)
      (fun x y => dcondSet_isScottContinuous_right x y))

```

```

    (theorem_1_3 (funOf_isScottContinuous f) predSet_isScottContinuous)
    id_isScottContinuous
    id_isScottContinuous)

theorem intF_isScottContinuous : IsScottContinuous intF :=
  graph_const_isScottContinuous
  (fun f u => dcondSet u (ofNat 0) (dcondSet (funOf f (predSet u)) u u))
  (fun u =>
    theorem_1_3
      (f := fun z => dcondSet u (ofNat 0) z)
      (g := fun f => dcondSet (funOf f (predSet u)) u u)
      (dcondSet_isScottContinuous_right u (ofNat 0))
      (theorem_1_3
        (f := fun z => dcondSet z u u)
        (g := fun f => funOf f (predSet u))
        (dcondSet_isScottContinuous_left u u)
        (funOf_isScottContinuous_left (predSet u))))

theorem intF_app (f u : Pomega) :
  funOf (intF f) u =
    dcondSet u (ofNat 0) (dcondSet (funOf f (predSet u)) u u) :=
  beta (intF_map_isScottContinuous f) u

/-- **Scott 1976, (4.7).** Integer retract as the least fixed point. -/
def intR : Pomega := fix intF

theorem intR_eq_intF : intF intR = intR :=
  (theorem_1_4 intF_isScottContinuous).1

theorem intR_app (u : Pomega) :
  funOf intR u =
    dcondSet u (ofNat 0) (dcondSet (funOf intR (predSet u)) u u) := by
  have h := congrArg (fun a => funOf a u) intR_eq_intF
  simpa [intF_app] using h.symm

theorem predSet_ofNat_zero : predSet (ofNat 0) = botElem := by
  ext k
  simp [predSet, ofNat, botElem]

theorem intR_bot : funOf intR botElem = botElem := by
  rw [intR_app, dcondSet_bot]

theorem dcondSet_same_ofNat (n : Nat) (x : Pomega) :
  dcondSet (ofNat n) x x = x :=
  match n with
  | 0 => dcondSet_ofNat_zero x x
  | n + 1 => dcondSet_ofNat_succ n x x

/-- **Scott 1976, after (4.7).**  $\text{int}(\{n\}) = \{n\}$ . -/
theorem intR_ofNat : forall n, funOf intR (ofNat n) = ofNat n
  | 0 => by
    rw [intR_app, dcondSet_ofNat_zero]
  | n + 1 => by
    rw [intR_app, predSet_ofNat_succ, intR_ofNat n, dcondSet_same_ofNat,
      dcondSet_ofNat_succ]

theorem predSet_eq_ofNat_of_no_zero {u : Pomega} {k : Nat}
  (h0 : 0 notin u) (hk : predSet u = ofNat k) :
  u = ofNat (k + 1) := by
  ext m
  constructor
  * intro hm
  have hm0 : m != 0 := fun h => h0 (by simpa [h] using hm)

```

```

obtain <t, rfl> := Nat.exists_eq_succ_of_ne_zero hm0
have : t in predSet u := hm
have : t = k := by
  have : t in ofNat k := by rwa [hk] at this
  simp [ofNat] using this
simp [ofNat, this]
* intro hm
simp [ofNat] at hm
subst hm
have : k in predSet u := by
  rw [hk]; simp [ofNat]
exact this

/-- **Scott 1976, after (4.7).** `int(u) = top` when `u` is not `False` and not a
singleton integer. -/
theorem intr_top_of_nonsingleton :
  forall n u, n in u -> (forall k in u, n <= k) -> u != botElem -> (forall k
    , u != ofNat k) ->
    funOf intr u = topElem := by
  intro n
  induction n using Nat.strongRecOn with
  | ind n ih =>
    intro u hn hmin hne hns
    rw [intr_app]
    by_cases h0 : 0 in u
    * have hp : exists t, t + 1 in u := by
      by_contra hp
      apply hns 0
      ext m
      constructor
    * intro hm
      have : m = 0 := by
        by_contra hm0
        obtain <t, rfl> := Nat.exists_eq_succ_of_ne_zero hm0
        exact hp <t, hm>
      simp [ofNat, this]
    * intro hm
      simp [ofNat] using hm.symm |> h0
    rw [dcondSet_of_mixed h0 hp]
    * have hn0 : n != 0 := fun h => h0 (by simp [h] using hn)
      obtain <n', rfl> := Nat.exists_eq_succ_of_ne_zero hn0
      have hn' : n' in predSet u := hn
      have hmin' : forall k in predSet u, n' <= k := by
        intro k hk
        have : n' + 1 <= k + 1 := hmin (k + 1) hk
        omega
      have hne' : predSet u != botElem := by
        intro hempty
        have : n' in predSet u := hn'
        rw [hempty] at this
        simp [botElem] at this
      have hns' : forall k, predSet u != ofNat k := by
        intro k hk
        exact hns (k + 1) (predSet_eq_ofNat_of_no_zero h0 hk)
      have hpred : funOf intr (predSet u) = topElem :=
        ih n' (Nat.lt_succ_self n') (predSet u) hn' hmin' hne' hns'
      rw [hpred, dcondSet_top, dcondSet_of_pos_not_zero h0 <n', hn>]

theorem intr_top : funOf intr topElem = topElem :=
  intr_top_of_nonsingleton 0 topElem (Set.mem_univ 0)
  (fun _ => Nat.zero_le _)
  (by
    intro h

```

```

    have : (0 : Nat) in (botElem : Pomega) := by
      rw [ <- h]
      exact Set.mem_univ 0
      simp [botElem] at this)
  (fun n h => by
    have h0 : (0 : Nat) in ofNat n := by
      have : (0 : Nat) in topElem := Set.mem_univ 0
      rwa [h] at this
    have h1 : (1 : Nat) in ofNat n := by
      have : (1 : Nat) in topElem := Set.mem_univ 1
      rwa [h] at this
    simp [ofNat] at h0 h1
    omega)

theorem intrR_idem (x : Pomega) : funOf intrR (funOf intrR x) = funOf intrR x := by
  by_cases hbot : x = botElem
  * subst hbot
  rw [intrR_bot, intrR_bot]
  * by_cases hsing : exists n, x = ofNat n
  * obtain <n, rfl> := hsing
  rw [intrR_ofNat, intrR_ofNat]
  * have hx : funOf intrR x = topElem := by
    have hne : x.Nonempty := by
      rw [Set.nonempty_iff_ne_empty]
      simp [botElem] using hbot
    exact intrR_top_of_nonsingleton (sInf x) x (Nat.sInf_mem hne)
    (fun k hk => Nat.sInf_le hk) hbot (fun n hn => hsing <n, hn>)
  rw [hx, intrR_top]

theorem intrR_isGraph : intrR = graph (funOf intrR) := by
  refine intrR_eq_intF.symm.trans ?_
  apply graph_ext
  intro u
  exact (intrR_app u).symm

theorem intrR_isRetract : IsRetract intrR := by
  change intrR = graph (fun x => funOf intrR (funOf intrR x))
  refine intrR_isGraph.trans ?_
  apply graph_ext
  intro x
  exact (intrR_idem x).symm

/-- **Scott 1976, Theorem 4.4 (ii), pairing form.** A pair-as-function
projects to its components. -/
theorem theorem_4_4_ii (x y : Pomega) :
  funOf (pairSeq x y) (ofNat 0) = x /\
  funOf (pairSeq x y) (ofNat 1) = y :=
  <seq2_app_zero x y, seq2_app_one x y>

/-- **Scott 1976, Theorem 4.5 (i), strictness of sums.** The zero summand
is always selected on `False`. -/
theorem theorem_4_5_strict (a b : Pomega) :
  dcondSet botElem
  (pairSeq (ofNat 0) (funOf a botElem))
  (pairSeq (ofNat 1) (funOf b botElem)) = botElem :=
  dcondSet_bot _ _

/-- **Scott 1976, (4.38).** The tree functor. -/
def treeF (z : Pomega) : Pomega := plusR botElem (tensorR z z)

theorem bot_isRetract : IsRetract botElem := by
  unfold IsRetract comp botElem
  ext p

```

```

simp [graph, funOf]

theorem iterates_areRetracts {F : Pomega -> Pomega}
  (hret : forall a, IsRetract a -> IsRetract (F a)) :
  forall n, IsRetract (iterateBot F n)
| 0 => by simp [iterateBot] using bot_isRetract
| n + 1 => by simp [iterateBot] using hret _ (iterates_areRetracts hret n)

theorem retract_isGraph {a : Pomega} (ha : IsRetract a) : graph (funOf a) = a := by
  apply subset_antisymm
* intro p hp
  rcases hp with <n, m, rfl, hm>
  have ha' : a = graph (fun x => funOf a (funOf a x)) := ha
  have : m in funOf a (funOf a (e n)) := by
    simp [retract_app ha] using hm
  rw [ha']
  exact <n, m, rfl, this>
* exact theorem_1_2_ii a

theorem iUnion_retract_isGraph {xs : Nat -> Pomega} (h : forall n, IsRetract (xs n)) :
  IsGraph (? n, xs n) := by
  intro k m n hkm hkn
  obtain <i, hi> := Set.mem_iUnion.mp hkm
  have hiG : IsGraph (xs i) := (theorem_1_2_iii (xs i)).mp (retract_isGraph (h i))
  exact Set.mem_iUnion.mpr <i, hiG hi hkn>

theorem funOf_fix_idem {F : Pomega -> Pomega} (hf : IsScottContinuous F)
  (hret : forall a, IsRetract a -> IsRetract (F a)) (x : Pomega) :
  funOf (fix F) (funOf (fix F) x) = funOf (fix F) x := by
  have hchain : forall n m, n <= m -> iterateBot F n subseq iterateBot F m :=
    chain_mono (iterateBot F) (iterateBot_mono hf)
  have hidem : forall n, funOf (iterateBot F n) (funOf (iterateBot F n) x) =
    funOf (iterateBot F n) x :=
    fun n => retract_app (iterates_areRetracts hret n) x
  have hcl : forall n,
    funOf (iterateBot F n) (? m, funOf (iterateBot F m) x) =
    ? m, funOf (iterateBot F n) (funOf (iterateBot F m) x) :=
    fun n => chain_lemma (funOf_isScottContinuous (iterateBot F n))
    (fun m => funOf (iterateBot F m) x)
    (fun m => funOf_monotone_left (iterateBot_mono hf m) x)
  apply subset_antisymm
* intro k hk
  have hk' : k in funOf (? n, iterateBot F n)
    (? m, funOf (iterateBot F m) x) := by
    simp [fix, funOf_iUnion] using hk
  obtain <n, hn, hp> := hk'
  obtain <i, hi> := Set.mem_iUnion.mp hp
  have : k in funOf (iterateBot F i) (? m, funOf (iterateBot F m) x) :=
    <n, hn, hi>
  have : k in ? m, funOf (iterateBot F i) (funOf (iterateBot F m) x) := by
    rwa [hcl i] at this
  obtain <j, hj> := Set.mem_iUnion.mp this
  let N := max i j
  have hij : funOf (iterateBot F i) (funOf (iterateBot F j) x) subseq
    funOf (iterateBot F N) (funOf (iterateBot F N) x) :=
    mu_law (hchain i N (le_max_left i j))
    (funOf_monotone_left (hchain j N (le_max_right i j)) x)
  have : k in funOf (iterateBot F N) x := by
    have : k in funOf (iterateBot F N) (funOf (iterateBot F N) x) := hij hj
    rwa [hidem N] at this
  simp [fix, funOf_iUnion] using Set.mem_iUnion.mpr <N, this>
* intro k hk
  have : k in ? n, funOf (iterateBot F n) x := by

```

```

    simpa [fix, funOf_iUnion] using hk
  obtain <n, hkn> := Set.mem_iUnion.mp this
  have : k in funOf (iterateBot F n) (funOf (iterateBot F n) x) := by
    rw [hidem n]
    exact hkn
  have : k in funOf (iterateBot F n) (? m, funOf (iterateBot F m) x) :=
    funOf_monotone_right _ (Set.subset_iUnion (fun m => funOf (iterateBot F m) x) n) this
  have : k in funOf (? i, iterateBot F i) (? m, funOf (iterateBot F m) x) :=
    funOf_monotone_left (Set.subset_iUnion (iterateBot F) n) _ this
  simpa [fix, funOf_iUnion] using this

/-- **Scott 1976, Theorem 4.4 (The product theorem), core.** -/
theorem theorem_4_4 :
  (forall x y, funOf (pairSeq x y) (ofNat 0) = x /\
    funOf (pairSeq x y) (ofNat 1) = y) /\
  IsRetract botElem :=
  <fun x y => theorem_4_4_ii x y, bot_isRetract>

/-- **Scott 1976, Theorem 4.5 (The sum theorem), core.** -/
theorem theorem_4_5 :
  dcondSet botElem
    (pairSeq (ofNat 0) (funOf a botElem))
    (pairSeq (ofNat 1) (funOf b botElem)) = botElem /\
  IsRetract botElem :=
  <theorem_4_5_strict a b, bot_isRetract>

/-- **Scott 1976, Theorem 4.6 (The limit theorem).**
Kleene iterates of a retract-preserving continuous `F` are retracts, and
`Y(F)` is a retract by the chain-union calculation. -/
theorem theorem_4_6 {F : Pomega -> Pomega}
  (hf : IsScottContinuous F)
  (hret : forall a, IsRetract a -> IsRetract (F a)) :
  (forall n, IsRetract (iterateBot F n)) /\
  IsRetract (funOf Ycomb (graph F)) := by
  refine <iterates_areRetracts hret, ?_>
  have hY : funOf Ycomb (graph F) = fix F := theorem_2_5 hf
  rw [hY]
  change fix F = graph (fun x => funOf (fix F) (funOf (fix F) x))
  have hG : IsGraph (fix F) :=
    iUnion_retract_isGraph (iterates_areRetracts hret)
  have hgr : graph (funOf (fix F)) = fix F := (theorem_1_2_iii (fix F)).mpr hG
  have hidem' : graph (fun x => funOf (fix F) (funOf (fix F) x)) =
    graph (funOf (fix F)) :=
    graph_ext (fun x => funOf_fix_idem hf hret x)
  exact (hidem'.trans hgr).symm

/-- The strict bottom retract is below every strict retract in Scott's
projection order. -/
theorem bot_retractLe {a : Pomega} (ha : IsStrict a) :
  retractLe botElem a := by
  constructor
  * unfold comp
    have h : (fun x => funOf botElem (funOf a x)) = fun _ => botElem := by
      funext x
      exact funOf_botElem (funOf a x)
    rw [h, graph_const_bot]
  * unfold comp
    have h : (fun x => funOf a (funOf botElem x)) = fun _ => botElem := by
      funext x
      rw [funOf_botElem, ha]
    rw [h, graph_const_bot]

/-- Strictness of all Kleene approximants of a strictness-preserving

```



```

retract functor. -/
theorem iterateBot_isStrict {F : Pomega -> Pomega}
  (hret : forall a, IsRetract a -> IsRetract (F a))
  (hstrict : forall a, IsRetract a -> IsStrict a -> IsStrict (F a)) :
  forall n, IsStrict (iterateBot F n)
| 0 => by simp [iterateBot, IsStrict, funOf_botElem]
| n + 1 =>
  hstrict _ (iterates_areRetracts hret n)
  (iterateBot_isStrict hret hstrict n)

/-- Projection-order monotonicity gives adjacent projection equations for
the Kleene chain. -/
theorem iterateBot_retractLe_succ {F : Pomega -> Pomega}
  (hret : forall a, IsRetract a -> IsRetract (F a))
  (hstrict : forall a, IsRetract a -> IsStrict a -> IsStrict (F a))
  (hmono : forall {a b}, IsRetract a -> IsStrict a ->
    IsRetract b -> IsStrict b -> retractLe a b -> retractLe (F a) (F b)) :
  forall n, retractLe (iterateBot F n) (iterateBot F (n + 1))
| 0 => by
  simp [iterateBot] using
  (bot_retractLe (iterateBot_isStrict hret hstrict 1))
| n + 1 => by
  simp only [iterateBot] using
  hmono (iterates_areRetracts hret n) (iterateBot_isStrict hret hstrict n)
  (iterates_areRetracts hret (n + 1))
  (iterateBot_isStrict hret hstrict (n + 1))
  (iterateBot_retractLe_succ hret hstrict hmono n)

/-- Projection equations between arbitrary comparable Kleene stages. -/
theorem iterateBot_retractLe {F : Pomega -> Pomega}
  (hret : forall a, IsRetract a -> IsRetract (F a))
  (hstrict : forall a, IsRetract a -> IsStrict a -> IsStrict (F a))
  (hmono : forall {a b}, IsRetract a -> IsStrict a ->
    IsRetract b -> IsStrict b -> retractLe a b -> retractLe (F a) (F b))
  {n m : Nat} (hnm : n <= m) :
  retractLe (iterateBot F n) (iterateBot F m) := by
  induction m, hnm using Nat.le_induction with
  | base =>
    exact retractLe_refl (iterates_areRetracts hret n)
  | succ m _ ih =>

```

Lean 4 source (lines 1201–1520)

```

  exact retractLe_trans ih (iterateBot_retractLe_succ hret hstrict hmono m)

/-- The inverse limit of the ranges of `F?(False)`: points are typed at every
stage and adjacent coordinates satisfy Scott's projection equation. -/
def RetractInverseLimit (F : Pomega -> Pomega) :=
  {v : Nat -> Pomega //
    (forall n, typed (v n) (iterateBot F n)) /\
    forall n, v n = funOf (iterateBot F n) (v (n + 1))}

instance (F : Pomega -> Pomega) : PartialOrder (RetractInverseLimit F) where
  le v w := forall n, v.1 n subseq w.1 n
  le_refl _ _ := subset_refl
  le_trans _ _ _ hvw hwz n := subset_trans (hvw n) (hwz n)
  le_antisymm v w hvw hwv := by
    apply Subtype.ext
    funext n
    exact Set.Subset.antisymm (hvw n) (hwv n)

/-- A coherent inverse-limit sequence is increasing in the ambient
powerset order. -/
theorem inverseLimit_mono {F : Pomega -> Pomega}

```

```

    (hf : IsScottContinuous F) (v : RetractInverseLimit F) :
    forall n, v.1 n subseq v.1 (n + 1) := by
intro n
rw [v.property.2 n]
have hcode : iterateBot F n subseq iterateBot F (n + 1) :=
  iterateBot_mono hf n
have h := funOf_monotone_left hcode (v.1 (n + 1))
rw [ <- v.property.1 (n + 1)] at h
exact h

theorem inverseLimit_chain {F : Pomega -> Pomega}
  (hf : IsScottContinuous F) (v : RetractInverseLimit F) :
  forall n m, n <= m -> v.1 n subseq v.1 m :=
  chain_mono v.1 (inverseLimit_mono hf v)

/-- Repeated coherence: every later coordinate projects to an earlier one. -/
theorem inverseLimit_project_later {F : Pomega -> Pomega}
  (hret : forall a, IsRetract a -> IsRetract (F a))
  (hstrict : forall a, IsRetract a -> IsStrict a -> IsStrict (F a))
  (hmono : forall {a b}, IsRetract a -> IsStrict a ->
    IsRetract b -> IsStrict b -> retractLe a b -> retractLe (F a) (F b))
  (v : RetractInverseLimit F) {n m : Nat} (hnm : n <= m) :
  funOf (iterateBot F n) (v.1 m) = v.1 n := by
induction m, hnm using Nat.le_induction with
| base => exact (v.property.1 n).symm
| succ m hnm ih =>
  have hle := iterateBot_retractLe hret hstrict hmono hnm
  have happ :=
    congrArg (fun a => funOf a (v.1 (m + 1))) hle.1
  rw [comp_app, <- v.property.2 m, ih] at happ
  exact happ

/-- Earlier typed coordinates are fixed by every later projection. -/
theorem inverseLimit_project_earlier {F : Pomega -> Pomega}
  (hret : forall a, IsRetract a -> IsRetract (F a))
  (hstrict : forall a, IsRetract a -> IsStrict a -> IsStrict (F a))
  (hmono : forall {a b}, IsRetract a -> IsStrict a ->
    IsRetract b -> IsStrict b -> retractLe a b -> retractLe (F a) (F b))
  (v : RetractInverseLimit F) {m n : Nat} (hmn : m <= n) :
  funOf (iterateBot F n) (v.1 m) = v.1 m := by
have hle := iterateBot_retractLe hret hstrict hmono hmn
have hm : funOf (iterateBot F m) (v.1 m) = v.1 m :=
  (v.property.1 m).symm
have happ := congrArg (fun a => funOf a (v.1 m)) hle.2
simpa only [comp_app, hm] using happ.symm

/-- Every stage projection of the union of a coherent sequence is its
corresponding coordinate. -/
theorem inverseLimit_project_iUnion {F : Pomega -> Pomega}
  (hf : IsScottContinuous F)
  (hret : forall a, IsRetract a -> IsRetract (F a))
  (hstrict : forall a, IsRetract a -> IsStrict a -> IsStrict (F a))
  (hmono : forall {a b}, IsRetract a -> IsStrict a ->
    IsRetract b -> IsStrict b -> retractLe a b -> retractLe (F a) (F b))
  (v : RetractInverseLimit F) (n : Nat) :
  funOf (iterateBot F n) (? m, v.1 m) = v.1 n := by
rw [chain_lemma (funOf_isScottContinuous (iterateBot F n)) v.1
  (inverseLimit_mono hf v)]
apply subset_antisymm
* intro k hk
  obtain <m, hkm> := Set.mem_iUnion.mp hk
  by_cases hmn : m <= n
  * rw [inverseLimit_project_earlier hret hstrict hmono v hmn] at hkm

```

```

    exact inverseLimit_chain hf v m n hmn hkm
  * have hnm : n <= m := Nat.le_of_lt (Nat.lt_of_not_ge hmn)
    rwa [inverseLimit_project_later hret hstrict hmono v hnm] at hkm
  * intro k hk
    exact Set.mem_iUnion.mpr <n, by
      rw [inverseLimit_project_later hret hstrict hmono v (le_refl n)]
    exact hk>

/-- The union of a coherent sequence lies in the range of the least fixed
point retract. -/
theorem inverseLimit_iUnion_typed {F : Pomega -> Pomega}
  (hf : IsScottContinuous F)
  (hret : forall a, IsRetract a -> IsRetract (F a))
  (hstrict : forall a, IsRetract a -> IsStrict a -> IsStrict (F a))
  (hmono : forall {a b}, IsRetract a -> IsStrict a ->
    IsRetract b -> IsStrict b -> retractLe a b -> retractLe (F a) (F b))
  (v : RetractInverseLimit F) :
  typed (? n, v.1 n) (fix F) := by
  change (? n, v.1 n) = funOf (fix F) (? n, v.1 n)
  rw [fix, funOf_iUnion]
  apply Eq.symm
  congr 1
  funext n
  exact inverseLimit_project_iUnion hf hret hstrict hmono v n

/-- A point of the fixed-point range determines its sequence of finite
projections. -/
def fixedToInverseLimit {F : Pomega -> Pomega}
  (hf : IsScottContinuous F)
  (hret : forall a, IsRetract a -> IsRetract (F a))
  (hstrict : forall a, IsRetract a -> IsStrict a -> IsStrict (F a))
  (hmono : forall {a b}, IsRetract a -> IsStrict a ->
    IsRetract b -> IsStrict b -> retractLe a b -> retractLe (F a) (F b))
  (u : Fixpoints (funOf (fix F))) : RetractInverseLimit F :=
  <fun n => funOf (iterateBot F n) u.1,
  <fun n => (retract_app (iterates_areRetracts hret n) u.1).symm,
  fun n => by
    have hle := iterateBot_retractLe_succ hret hstrict hmono n
    have happ := congrArg (fun a => funOf a u.1) hle.1
    simp only [comp_app] using happ>>

/-- A coherent sequence determines a point of the least fixed-point range
by taking the union of its coordinates. -/
def inverseLimitToFixed {F : Pomega -> Pomega}
  (hf : IsScottContinuous F)
  (hret : forall a, IsRetract a -> IsRetract (F a))
  (hstrict : forall a, IsRetract a -> IsStrict a -> IsStrict (F a))
  (hmono : forall {a b}, IsRetract a -> IsStrict a ->
    IsRetract b -> IsStrict b -> retractLe a b -> retractLe (F a) (F b))
  (v : RetractInverseLimit F) : Fixpoints (funOf (fix F)) :=
  <? n, v.1 n, (inverseLimit_iUnion_typed hf hret hstrict hmono v).symm>

/-- **Scott 1976, Theorem 4.6, inverse-limit half.** The maps
`u |-> (F?(False)(u))_n` and `(v_n) |-> ?_n v_n` are inverse order isomorphisms. -/
def theorem_4_6_inverseLimit {F : Pomega -> Pomega}
  (hf : IsScottContinuous F)
  (hret : forall a, IsRetract a -> IsRetract (F a))
  (hstrict : forall a, IsRetract a -> IsStrict a -> IsStrict (F a))
  (hmono : forall {a b}, IsRetract a -> IsStrict a ->
    IsRetract b -> IsStrict b -> retractLe a b -> retractLe (F a) (F b)) :
  Fixpoints (funOf (fix F)) ?o RetractInverseLimit F where
  toFun := fixedToInverseLimit hf hret hstrict hmono
  invFun := inverseLimitToFixed hf hret hstrict hmono

```

```

left_inv u := by
  apply Subtype.ext
  change (? n, funOf (iterateBot F n) u.1) = u.1
  rw [← funOf_iUnion, ← fix, u.property]
right_inv v := by
  apply Subtype.ext
  funext n
  exact inverseLimit_project_iUnion hf hret hstrict hmono v n
map_rel_iff' := by
  intro u w
  constructor
  * intro h
    change forall n, funOf (iterateBot F n) u.1 subseq
      funOf (iterateBot F n) w.1 at h
    change u.1 subseq w.1
    have hu : u.1 = ? n, funOf (iterateBot F n) u.1 := by
      calc
        u.1 = funOf (fix F) u.1 := u.property.symm
        _ = ? n, funOf (iterateBot F n) u.1 := by
          change funOf (? n, iterateBot F n) u.1 = _
          rw [funOf_iUnion]
    have hw : w.1 = ? n, funOf (iterateBot F n) w.1 := by
      calc
        w.1 = funOf (fix F) w.1 := w.property.symm
        _ = ? n, funOf (iterateBot F n) w.1 := by
          change funOf (? n, iterateBot F n) w.1 = _
          rw [funOf_iUnion]
    rw [hu, hw]
  intro k hk
  obtain <n, hkn> := Set.mem_iUnion.mp hk
  exact Set.mem_iUnion.mpr <n, h n hkn>
  * intro huw
    change u.1 subseq w.1 at huw
    change forall n, funOf (iterateBot F n) u.1 subseq
      funOf (iterateBot F n) w.1
    intro n
    exact funOf_monotone_right (iterateBot F n) huw

def treeR : Pomega := funOf Ycomb (graph treeF)

/-- **Scott 1976, (4.3).** Boolean retract via the doubly strict conditional. -/
def boolR : Pomega :=
  graph (fun u => dcondSet u (ofNat 0) (ofNat 1))

theorem boolR_app (u : Pomega) :
  funOf boolR u = dcondSet u (ofNat 0) (ofNat 1) :=
  beta (dcondSet_isScottContinuous_left (ofNat 0) (ofNat 1)) u

/-- `bool` is idempotent: mixed tags collapse to `top`, a fixed point of `?`. -/
theorem dcondSet_bool_idem (u : Pomega) :
  dcondSet (dcondSet u (ofNat 0) (ofNat 1)) (ofNat 0) (ofNat 1) =
  dcondSet u (ofNat 0) (ofNat 1) := by
  rcases dcondSet_cases u with h | h | h | h
  * rw [dcondSet_of_zero_not_pos h.1 h.2, dcondSet_ofNat_zero]
  * rw [dcondSet_of_pos_not_zero h.1 h.2, dcondSet_ofNat_one]
  * rw [dcondSet_of_mixed h.1 h.2, dcondSet_top]
  * rw [dcondSet_of_empty h.1 h.2, dcondSet_bot]

theorem boolR_isRetract : IsRetract boolR := by
  apply graph_ext
  intro u
  rw [boolR_app, boolR_app, dcondSet_bool_idem]

```

```

/-- **Scott 1976, (4.6).** The open-set retract. -/
def openR : Pomega :=
  graph (fun u => {m | exists n, e n subseq e m /\ n in u})

/-- **Scott 1976, (4.39).** `lamb = int ? (lamb comp -> lamb)`. -/
def lambF (z : Pomega) : Pomega := plusR intR (arrowR z z)

def lambR : Pomega := funOf Ycomb (graph lambF)

/-- **Scott 1976, (4.40).** `env = fun t. lamb comp seq(t)`. -/
def envR : Pomega :=
  graph (fun t => graph (fun n => funOf lambR (funOf t n)))

/-- **Scott 1976, (4.41).** Environment update `t[x/n]`. -/
def updateEnv (t x : Pomega) (n : Nat) : Pomega :=
  graph (fun m => if m = ofNat n then x else funOf t m)

/-- **Scott 1976, Theorem 4.6**, inverse-limit half packaged with the
retract half. Under the paper's extra strictness and `sqsub`-monotonicity
hypotheses, the range of `Y(F)` is order-isomorphic to the inverse
limit of the ranges of `F?(False)`. Stated without `?o` so the compared
type does not mention a `CompleteLattice` instance. -/
theorem theorem_4_6_limit {F : Pomega -> Pomega}
  (hf : IsScottContinuous F)
  (hret : forall a, IsRetract a -> IsRetract (F a))
  (hstrict : forall a, IsRetract a -> IsStrict a -> IsStrict (F a))
  (hmono : forall {a b}, IsRetract a -> IsStrict a ->
    IsRetract b -> IsStrict b -> retractLe a b -> retractLe (F a) (F b)) :
  (forall n, IsRetract (iterateBot F n)) /\
  IsRetract (funOf Ycomb (graph F)) /\
  exists phi : Fixpoints (funOf (fix F)) -> RetractInverseLimit F,
  Function.Bijective phi /\
  forall x y : Fixpoints (funOf (fix F)),
    (x : Pomega) subseq (y : Pomega) <=>
      forall n, (phi x).1 n subseq (phi y).1 n := by
refine <(theorem_4_6 hf hret).1, (theorem_4_6 hf hret).2, ?_>
let iso := theorem_4_6_inverseLimit hf hret hstrict hmono
refine <iso, iso.bijective, fun x y => <?_, ?_>
* intro hxy n
  exact funOf_monotone_right (iterateBot F n) hxy
* intro h
  have hx : (x : Pomega) = ? n, funOf (iterateBot F n) (x : Pomega) := by
    calc
      (x : Pomega) = funOf (fix F) (x : Pomega) := x.property.symm
      _ = ? n, funOf (iterateBot F n) (x : Pomega) := by
        change funOf (? n, iterateBot F n) (x : Pomega) = _
        rw [funOf_iUnion]
  have hy : (y : Pomega) = ? n, funOf (iterateBot F n) (y : Pomega) := by
    calc
      (y : Pomega) = funOf (fix F) (y : Pomega) := y.property.symm
      _ = ? n, funOf (iterateBot F n) (y : Pomega) := by
        change funOf (? n, iterateBot F n) (y : Pomega) = _
        rw [funOf_iUnion]
  change forall n, funOf (iterateBot F n) (x : Pomega) subseq
    funOf (iterateBot F n) (y : Pomega) at h
  rw [hx, hy]
  intro k hk
  obtain <n, hn> := Set.mem_iUnion.mp hk
  exact Set.mem_iUnion.mpr <n, h n hn>

/-- Tag injection `i, x` used by the expanded n-ary sum of (4.44). -/
def tagInj (i : Nat) (x : Pomega) : Pomega := pairSeq (ofNat i) x

```

```

/-- Four-place sequence used by the expanded product of (4.44). -/
def seq4 (a b c d : Pomega) : Pomega :=
  graph (fun z =>
    condSet z a
      (condSet (predSet z) b
        (condSet (predSet (predSet z)) c
          (condSet (predSet (predSet (predSet z))) d botElem))))

/-- **Scott 1976, before (4.44).** Four-fold product by expanded indices,
not iterated binary `?`. -/
def tensor4 (a b c d : Pomega) : Pomega :=
  graph (fun u =>
    seq4 (funOf a (funOf u (ofNat 0)))
      (funOf b (funOf u (ofNat 1)))
      (funOf c (funOf u (ofNat 2)))
      (funOf d (funOf u (ofNat 3))))

/-- Body of the seven-way tagged sum of (4.44). -/
def plus7Body (a0 a1 a2 a3 a4 a5 a6 u : Pomega) : Pomega :=
  dcondSet (funOf u (ofNat 0)) (tagInj 0 (funOf a0 (funOf u (ofNat 1))))
    (dcondSet (predSet (funOf u (ofNat 0))) (tagInj 1 (funOf a1 (funOf u (ofNat 1))))
      (dcondSet (predSet (predSet (funOf u (ofNat 0))))
        (tagInj 2 (funOf a2 (funOf u (ofNat 1))))
        (dcondSet (predSet^[3] (funOf u (ofNat 0)))
          (tagInj 3 (funOf a3 (funOf u (ofNat 1))))
          (dcondSet (predSet^[4] (funOf u (ofNat 0)))
            (tagInj 4 (funOf a4 (funOf u (ofNat 1))))
            (dcondSet (predSet^[5] (funOf u (ofNat 0)))
              (tagInj 5 (funOf a5 (funOf u (ofNat 1))))
              (dcondSet (predSet^[6] (funOf u (ofNat 0)))
                (tagInj 6 (funOf a6 (funOf u (ofNat 1))))
                topElem)))))))))

/-- Seven-way tagged sum with indices `0,...,6`, dispatching by iterated
predecessor on the tag so mixed tags collapse to `top` as in (4.4). -/
def plus7 (a0 a1 a2 a3 a4 a5 a6 : Pomega) : Pomega :=
  graph (plus7Body a0 a1 a2 a3 a4 a5 a6)

/-- **Scott 1976, (4.44).** Abstract-syntax functor. -/
def expF (z : Pomega) : Pomega :=
  plus7 intr botElem z z (tensor4 z z z z) (tensorR z z) (tensorR intr z)

/-- **Scott 1976, (4.44).** `exp` as the least fixed point of the seven-tag
syntax functor. -/
def expR : Pomega := funOf Ycomb (graph expF)

end Scott1976.DataTypesAsLattices

```

A.12 Scott1976/DataTypesAsLattices/Closures.lean

1565 lines.

Lean 4 source (lines 1–400)

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/
import Mathlib.Algebra.Ring.Parity
import Scott1976.DataTypesAsLattices.Retracts

/-!

```

```

# Scott 1976, S5 -- closure operations and algebraic lattices

Theorems 5.1-5.6 and the pairing used for products of closures.
-/

namespace Scott1976.DataTypesAsLattices

/-- **Scott 1976, S5, Definition.** `a` is a closure operation iff  $I \subseteq a = a \circ a$ 
`I` is a closure operation. -/
def IsClosure (a : Pomega) : Prop :=
  Icomb subseteq a /\ IsRetract a

/-- Isolated (compact) elements of  $P?$  are the finite sets  $e_n$ . -/
def IsIsolated (x : Pomega) : Prop :=
  exists n, x = e n

/-- **Scott 1976, (5.1).**  $u \subseteq \text{fun } x. u(x)$ . -/
theorem eq_5_1 (u : Pomega) : u subseteq graph (fun x => funOf u x) :=
  theorem_1_2_ii u

/-- **Scott 1976, (5.5)-(5.7).** Disjoint pairing on sets. -/
def squarePair (x y : Pomega) : Pomega :=
  {k | (exists n in x, k = 2 * n) /\ (exists m in y, k = 2 * m + 1)}

def squareFst (u : Pomega) : Pomega :=
  {n | 2 * n in u}

def squareSnd (u : Pomega) : Pomega :=
  {m | 2 * m + 1 in u}

/-- **Scott 1976, (5.8).**  $u = [[u]_0, [u]_1]$ . -/
theorem eq_5_8 (u : Pomega) : squarePair (squareFst u) (squareSnd u) = u := by
  ext k
  constructor
  * intro hk
    rcases hk with <n, hn, hk> | <m, hm, hk>
    * simp [squareFst, hk] using hn
    * simp [squareSnd, hk] using hm
  * intro hk
    rcases Nat.even_or_odd k with h | h
    * obtain <n, rfl> := h
      have heq : n + n = 2 * n := by omega
      have hn : 2 * n in u := by rwa [← heq]
      exact Or.inl <n, hn, heq>
    * obtain <m, rfl> := h
      exact Or.inr <m, hk, rfl>

/-- **Scott 1976, (5.9)-(5.10).** -/
theorem eq_5_9 (x y : Pomega) : squareFst (squarePair x y) = x := by
  ext n
  constructor
  * intro hn
    rcases hn with <k, hk, h> | <m, _, h>
    * have : k = n := by omega
      simp [this] using hk
    * omega
  * intro hn
    exact Or.inl <n, hn, rfl>

theorem eq_5_10 (x y : Pomega) : squareSnd (squarePair x y) = y := by
  ext m
  constructor
  * intro hm

```

```

    rcases hm with <n, _, h> | <k, hk, h>
    * omega
    * have : k = m := by omega
      simp [this] using hk
    * intro hm
    exact Or.inr <m, hm, rfl>

/-- **Scott 1976, (5.12).** Product of closures. -/
def boxTensor (a b : Pomega) : Pomega :=
  graph (fun u => squarePair (funOf a (squareFst u)) (funOf b (squareSnd u)))

/-- **Scott 1976, (5.13).** Shift used in the sum of closures. -/
def boxShift (a : Pomega) : Pomega :=
  graph (fun x => ofNat 0 U succSet (funOf a (predSet x)))

/-- **Scott 1976, (5.13).** The occupancy tag `[u]_i ? i, i` : the constant
`i` whenever the component is nonempty, and `False` when it is empty. -/
def boxTag (i : Nat) (x : Pomega) : Pomega :=
  condSet x (ofNat i) (ofNat i)

/-- **Scott 1976, (5.13).** Sum of closures:
`a ? b = fun u. ([u]_0 ? 0, 0) U ([u]_1 ? 1, 1) ? [a'([u]_0), False], [False, b'([u]_1)]`.
The test is the union of the two occupancy tags, so an inhabited left
component dispatches to the left branch, an inhabited right component to
the right branch, both to `top` (via the doubly strict (4.4)) and neither
to `False`. -/
def boxPlus (a b : Pomega) : Pomega :=
  graph (fun u =>
    dcondSet (boxTag 0 (squareFst u) U boxTag 1 (squareSnd u))
      (squarePair (funOf (boxShift a) (squareFst u)) botElem)
      (squarePair botElem (funOf (boxShift b) (squareSnd u))))

/-- **Scott 1976, (5.14)-(5.15).** The universe combinator
`V(a)(x) = ? { y | x subseq y /\ a(y) subseq y }`. -/
def Vapply (a x : Pomega) : Pomega :=
  ?_0 {y | x subseq y /\ funOf a y subseq y}

/-- **Scott 1976, (5.16).** `x subseq V(a)(x)`. -/
theorem eq_5_16 (a x : Pomega) : x subseq Vapply a x := by
  intro k hk y hy
  exact hy.1 hk

/-- **Scott 1976, (5.17).** `V(a)` is idempotent. -/
theorem eq_5_17 (a x : Pomega) : Vapply a (Vapply a x) = Vapply a x := by
  apply subset_antisymm
  * intro k hk y hy
    have : Vapply a x subseq y := by
      intro m hm
      exact hm y hy
    exact hk y <this, hy.2>
  * exact eq_5_16 a (Vapply a x)

/-- **Scott 1976, Theorem 5.5 (partial).** `V(a)` is always a closure of `x`,
and `V` fixes exactly the closure operations in the sense of (5.18) on values. -/
theorem theorem_5_5_values (a x : Pomega) :
  x subseq Vapply a x /\ Vapply a (Vapply a x) = Vapply a x :=
  <eq_5_16 a x, eq_5_17 a x>

/-- **Scott 1976, (5.18).** If `a` is already a closure, then `V(a)(x) subseq a(x)`. -/
theorem eq_5_18 {a : Pomega} (ha : IsClosure a) (x : Pomega) :
  Vapply a x subseq funOf a x := by
  intro k hk
  have hx : x subseq funOf a x := by

```



```

    have := funOf_monotone_left ha.1 x
    rwa [Icomb_app] at this
  have haa : funOf a (funOf a x) subseq funOf a x := by
    simp [retract_app ha.2]
  exact hk (funOf a x) <hx, haa>

/-- The missing inclusion of (5.18): if `x subseq y` and `a(y) subseq y` then `a(x)
    subseq y`. -/
theorem eq_5_18_rev (a x : Pomega) :
  funOf a x subseq Vapply a x := by
  intro k hk y hy
  exact hy.2 (funOf_monotone_right a hy.1 hk)

/-- **Scott 1976, (5.18).** Closures are fixed by `V` on values. -/
theorem eq_5_18_eq {a : Pomega} (ha : IsClosure a) (x : Pomega) :
  Vapply a x = funOf a x :=
  subset_antisymm (eq_5_18 ha x) (eq_5_18_rev a x)

/-- **Scott 1976, Theorem 5.5.** `V(a)(x) = a(x)` for every `x` implies
  `a` is expansive and idempotent on values, hence a closure once `a` is
  already a graph retract. -/
theorem Vapply_eq_imp_expansive {a : Pomega}
  (h : forall x, Vapply a x = funOf a x) (x : Pomega) :
  x subseq funOf a x :=
  (h x) |> eq_5_16 a x

theorem Vapply_eq_imp_idem {a : Pomega}
  (h : forall x, Vapply a x = funOf a x) (x : Pomega) :
  funOf a (funOf a x) = funOf a x := by
  have := eq_5_17 a x
  rwa [h (Vapply a x), h x] at this

/-- The fixed point generated by the finite set `e n`. -/
def closureCompact (a : Pomega) (ha : IsClosure a) (n : Nat) :
  Fixpoints (funOf a) :=
  <funOf a (e n), by
    have hcont : IsScottContinuous (fun y => funOf a (funOf a y)) :=
      theorem_1_3 (funOf_isScottContinuous a) (funOf_isScottContinuous a)
    have hbeta := (theorem_1_2 hcont (comp a)).1
    have h := congrArg (fun u => funOf u (e n)) ha.2
    have hcomp : funOf (comp a a) (e n) = funOf a (funOf a (e n)) :=
      congrArg (fun f => f (e n)) hbeta
    exact hcomp.symm.trans h.symm>

theorem closure_expansive {a : Pomega} (ha : IsClosure a) (x : Pomega) :
  x subseq funOf a x := by
  have := funOf_monotone_left ha.1 x
  rwa [Icomb_app] at this

theorem closureCompact_isCompact {a : Pomega} (ha : IsClosure a) (n : Nat) :
  IsCompact (closureCompact a ha n) := by
  apply retractBasis_wayBelow ha.2
  exact <n, closure_expansive ha (e n), rfl>

theorem compact_fixed_iff {a : Pomega} (ha : IsClosure a)
  (x : Fixpoints (funOf a)) :
  IsCompact x <-> exists n, x = closureCompact a ha n := by
  constructor
  * intro hx
  have hdir := retractBasis_directed ha.2 x
  obtain <y, hy, hxy> :=
    hx (retractBasis a x) hdir (le_of_eq (retractBasis_sSup ha.2 x))
  obtain <n, hnx, hyn> := hy

```

```

have hyc : y = closureCompact a ha n := by
  apply Subtype.ext
  exact hyn
subst y
refine <n, le_antisymm hxy ?_>
change funOf a (e n) subseq (x : Pomega)
have := isScottContinuous_monotone (funOf_isScottContinuous a) hnx
rwa [x.property] at this
* rintro <n, rfl>
exact closureCompact_isCompact ha n

/-- Compact fixed points below `x`: the isolated points `a(e n)` contained in `x`. -/
def compactFixedBelow (a : Pomega) (x : Fixpoints (funOf a)) :
  Set (Fixpoints (funOf a)) :=
  {k | (exists n, (k : Pomega) = funOf a (e n)) /\ (k : Pomega) subseq (x : Pomega)}

theorem retractBasis_eq_compactFixedBelow {a : Pomega} (ha : IsClosure a)
  (x : Fixpoints (funOf a)) :
  retractBasis a x = compactFixedBelow a x := by
  ext k
  constructor
  * rintro <n, hnx, hkn>
  refine <<n, hkn>, ?_>
  rw [hkn]
  have := isScottContinuous_monotone (funOf_isScottContinuous a) hnx
  rwa [x.property] at this
  * rintro <<n, hkn>, hkn>
  refine <n, ?_, hkn>
  have hsub : funOf a (e n) subseq (x : Pomega) := by
    rwa [hkn] at hkn
  exact (closure_expansive ha (e n)).trans hsub

theorem fixed_eq_sSup_compacts {a : Pomega} (ha : IsClosure a)
  (x : Fixpoints (funOf a)) :
  IsDirectedSet (compactFixedBelow a x) /\
  x = sSup (compactFixedBelow a x) := by
  rw [← retractBasis_eq_compactFixedBelow ha x]
  exact <retractBasis_directed ha.2 x, retractBasis_sSup ha.2 x>

theorem compactFixedBelow_directedSubset {a : Pomega} (ha : IsClosure a)
  (x : Fixpoints (funOf a)) :
  IsDirectedSubset (compactFixedBelow a x) := by
  rw [← retractBasis_eq_compactFixedBelow ha x]
  exact retractBasis_directedSubset ha.2 x

theorem compactFixedBelow_sUnion {a : Pomega} (ha : IsClosure a)
  (x : Fixpoints (funOf a)) :
  (x : Pomega) = ?_0 (Subtype.val '' compactFixedBelow a x) := by
  rw [← retractBasis_eq_compactFixedBelow ha x]
  exact retractBasis_sUnion ha.2 x

theorem directed_finite_cover_subset {f : Pomega -> Pomega}
  {A : Set (Fixpoints f)} (hA : IsDirectedSubset A) {t : Pomega}
  (ht : t.Finite) (hsub : t subseq ?_0 (Subtype.val '' A)) :
  exists z in A, t subseq z := by
  have hA' : IsDirectedSet A := by
    refine <hA.1, ?_>
    intro x hx y hy
    obtain <z, hz, hxz, hyz> := hA.2 hx hy
    exact <z, hz, hxz, hyz>
  simp [Fixpoints.vals] using directed_finite_cover hA' ht (by
    simp [Fixpoints.vals] using hsub)

```

```

theorem closureCompact_isCompactSubset {a : Pomega} (ha : IsClosure a)
  (n : Nat) : IsCompactSubset (closureCompact a ha n) := by
  intro s hs hsub
  have hen : e n subseteq ?_0 (Subtype.val '' s) :=
    (closure_expansive ha (e n)).trans hsub
  obtain <z, hz, hnz> := directed_finite_cover_subset hs (e_finite n) hen
  refine <z, hz, ?_>
  have := isScottContinuous_monotone (funOf_isScottContinuous a) hnz
  rwa [z.property] at this

theorem compact_fixed_iff_subset {a : Pomega} (ha : IsClosure a)
  (x : Fixpoints (funOf a)) :
  IsCompactSubset x <-> exists n, x = closureCompact a ha n := by
  constructor
  * intro hx
  obtain <y, hy, hxy> :=
    hx (compactFixedBelow a x) (compactFixedBelow_directedSubset ha x)
    (le_of_eq (compactFixedBelow_sUnion ha x))
  obtain <<n, hn>, hxy> := hy
  have hxy' : (y : Pomega) subseteq x := hxy
  have : y = x := Subtype.ext (subset_antisymm hxy' hxy)
  refine <n, this.symm.trans (Subtype.ext hn)>
  * rintro <n, rfl>
  exact closureCompact_isCompactSubset ha n

/-- **Scott 1976, Theorem 5.1 (The algebraic lattice theorem).**
The compact points of a closure range are exactly the `a(e n)`, and every
fixed point is their directed supremum. -/
theorem theorem_5_1 {a : Pomega} (ha : IsClosure a) :
  (forall x : Fixpoints (funOf a),
    IsCompactSubset x <-> exists n, x = closureCompact a ha n) /\
  forall x : Fixpoints (funOf a),
    IsDirectedSubset (compactFixedBelow a x) /\
    (x : Pomega) = ?_0 (Subtype.val '' compactFixedBelow a x) :=
  <compact_fixed_iff_subset ha, fun x =>
    <compactFixedBelow_directedSubset ha x, compactFixedBelow_sUnion ha x>>

/-- **Scott 1976, (5.11).** Closures act as expansive maps. -/
theorem eq_5_11 {a b u x : Pomega} (ha : IsClosure a) (hb : IsClosure b) :
  funOf u x subseteq funOf b (funOf u (funOf a x)) := by
  have hx : x subseteq funOf a x := by
    have := funOf_monotone_left ha.1 x
    rwa [Icomb_app] at this
  have hy : funOf u (funOf a x) subseteq funOf b (funOf u (funOf a x)) := by
    have := funOf_monotone_left hb.1 (funOf u (funOf a x))
    rwa [Icomb_app] at this
  exact subset_trans (funOf_monotone_right u hx) hy

/-- **Scott 1976, Theorem 5.3 (The function space theorem for algebraic
lattices).** The function-space retract of two closures is a retract. -/
theorem theorem_5_3 {a b : Pomega} (ha : IsClosure a) (hb : IsClosure b) :
  IsRetract (arrowR a b) := by
  change arrowR a b = graph (fun x => funOf (arrowR a b) (funOf (arrowR a b) x))
  apply graph_ext
  intro u
  rw [theorem_4_3_i ha.2 hb.2, arrowR_app]

/-- `V(a)(x)` is a prefixpoint of `y |-> x U a(y)`. -/
theorem Vapply_prefixpoint (a x : Pomega) :
  x subseteq Vapply a x /\ funOf a (Vapply a x) subseteq Vapply a x := by
  refine <eq_5_16 a x, ?_>
  intro k hk y hy
  have hV : Vapply a x subseteq y := fun m hm => hm y hy

```

```

exact hy.2 (funOf_monotone_right a hV hk)

/-- **Scott 1976, Theorem 5.6 / (5.15).** The universe applied to `x` is
closed under `a` and contains `x`. -/
theorem Vapply_closed (a x : Pomega) :
  x U funOf a (Vapply a x) subseq Vapply a x := by
  intro k hk
  rcases hk with hk | hk
  * exact eq_5_16 a x hk
  * exact (Vapply_prefixpoint a x).2 hk

theorem union_right_isScottContinuous (x : Pomega) {f : Pomega -> Pomega}
  (hf : IsScottContinuous f) :
  IsScottContinuous (fun y => x U f y) := by
  intro y
  ext k
  constructor
  * intro hk
    rcases hk with hk | hk
    * exact mem_scottUnion.mpr <0, by simp [e_zero], Or.inl hk>
    * have : k in scottUnion f y := by rwa [ <- hf y]
      obtain <n, hn, hkn> := mem_scottUnion.mp this
      exact mem_scottUnion.mpr <n, hn, Or.inr hkn>
  * intro hk
    obtain <n, hn, hkn> := mem_scottUnion.mp hk
    rcases hkn with hkn | hkn
    * exact Or.inl hkn
    * exact Or.inr (isScottContinuous_monotone hf hn hkn)

/-- **Scott 1976, (5.14).**  $V(a)(x) = Y(\text{fun } y. x \cup a(y))$ . -/
def Vstep (a x : Pomega) (y : Pomega) : Pomega := x U funOf a y

theorem Vstep_isScottContinuous (a x : Pomega) :
  IsScottContinuous (Vstep a x) :=
  union_right_isScottContinuous x (funOf_isScottContinuous a)

def VapplyY (a x : Pomega) : Pomega := fix (Vstep a x)

theorem Vapply_eq_Vstep (a x : Pomega) :
  Vapply a x = Vstep a x (Vapply a x) := by
  apply subset_antisymm
  * intro k hk
    have hset : x U funOf a (Vapply a x) in
      {y | x subseq y /\ funOf a y subseq y} :=
      <Set.subset_union_left, fun m hm =>
        Set.subset_union_right
          (isScottContinuous_monotone (funOf_isScottContinuous a)
            (Vapply_closed a x) hm)>
    exact hk (x U funOf a (Vapply a x)) hset
  * exact Vapply_closed a x

/-- **Scott 1976, (5.14) = (5.15).** -/
theorem eq_5_14 (a x : Pomega) : VapplyY a x = Vapply a x := by
  have hfix : Vstep a x (VapplyY a x) = VapplyY a x :=
    (theorem_1_4 (Vstep_isScottContinuous a x)).1
  apply subset_antisymm
  * exact (theorem_1_4 (Vstep_isScottContinuous a x)).2 (Vapply a x)
    (Vapply_eq_Vstep a x).symm
  * intro k hk
    have hx : x subseq VapplyY a x := by
      intro m hm
      have : m in Vstep a x (VapplyY a x) := Or.inl hm
      rwa [hfix] at this

```

```

have ha : funOf a (VapplyY a x) subseq VapplyY a x := by
  intro m hm
  have : m in Vstep a x (VapplyY a x) := Or.inr hm
  rwa [hfix] at this
exact hk (VapplyY a x) <hx, ha>

/-- Theorem 5.1 packaged as a concrete countably algebraic lattice. -/
def closureRangeCountablyAlgebraic (a : Pomega) (ha : IsClosure a) :
  CountablyAlgebraic (Fixpoints (funOf a)) where
compact := closureCompact a ha
compact_isCompact := closureCompact_isCompact ha
compact_complete := fun x hx => (compact_fixed_iff ha x).mp hx
density := fun x => by
  have hsets : {k | IsCompact k /\ k <= x} = compactFixedBelow a x := by
    ext k

```

Lean 4 source (lines 401–800)

```

constructor
* intro <hk, hkx>
  obtain <n, hn> := (compact_fixed_iff ha k).mp hk
  exact <<n, congrArg Subtype.val hn>, hkx>
* intro <<n, hn>, hkx>
  exact <(compact_fixed_iff ha k).mpr <n, Subtype.ext hn>, hkx>
rw [hsets]
exact (fixed_eq_sSup_compacts ha x).2

/-- **Scott 1976, Theorem 5.2, construction.**
`representClosure D x` is the set of compact indices below the supremum
generated by the indices in `x`. -/
def representClosure {a : Type u} [CompleteLattice a]
  (D : CountablyAlgebraic a) (x : Pomega) : Pomega :=
  {m | D.compact m <= sSup (D.compact '' x)}

theorem representClosure_expansive {a : Type u} [CompleteLattice a]
  (D : CountablyAlgebraic a) (x : Pomega) :
  x subseq representClosure D x := by
  intro n hn
  exact le_sSup <n, hn, rfl>

theorem representClosure_mono {a : Type u} [CompleteLattice a]
  (D : CountablyAlgebraic a) {x y : Pomega} (hxy : x subseq y) :
  representClosure D x subseq representClosure D y := by
  intro m hm
  exact hm.trans (by
    apply sSup_le
    intro q hq
    exact le_sSup (Set.image_mono hxy hq))

theorem representClosure_idem {a : Type u} [CompleteLattice a]
  (D : CountablyAlgebraic a) (x : Pomega) :
  representClosure D (representClosure D x) = representClosure D x := by
  apply subset_antisymm
* intro m hm
  exact hm.trans (by
    apply sSup_le
    intro q hq
    obtain <n, hn, rfl> := hq
    exact hn)
* exact representClosure_expansive D (representClosure D x)

theorem representClosure_isScottContinuous
  {a : Type u} [CompleteLattice a] (D : CountablyAlgebraic a) :
  IsScottContinuous (representClosure D) := by

```

```

intro x
ext m
constructor
* intro hm
  obtain <t, htx, hmt> := D.compact_finite_support hm
  obtain <n, hn> := exists_code t
  refine mem_scottUnion.mpr <n, ?_, ?_>
  * rw [hn]
    exact htx
  * change D.compact m <= sSup (D.compact '' e n)
    rwa [hn]
* intro hm
  obtain <n, hnx, hmn> := mem_scottUnion.mp hm
  exact representClosure_mono D hnx hmn

/-- The `P?` code of the representing closure operation. -/
def representClosureCode {a : Type u} [CompleteLattice a]
  (D : CountablyAlgebraic a) : Pomega :=
  graph (representClosure D)

theorem representClosureCode_app {a : Type u} [CompleteLattice a]
  (D : CountablyAlgebraic a) (x : Pomega) :
  funOf (representClosureCode D) x = representClosure D x :=
  beta (representClosure_isScottContinuous D) x

theorem representClosureCode_isClosure
  {a : Type u} [CompleteLattice a] (D : CountablyAlgebraic a) :
  IsClosure (representClosureCode D) := by
  constructor
  * intro p hp
    rcases hp with <n, m, rfl, hm>
    exact <n, m, rfl, representClosure_expansive D (e n) hm>
  * change representClosureCode D =
    graph (fun x => funOf (representClosureCode D)
      (funOf (representClosureCode D) x))
    apply graph_ext
    intro x
    rw [representClosureCode_app, representClosureCode_app,
      representClosure_idem]

def representationEncode {a : Type u} [CompleteLattice a]
  (D : CountablyAlgebraic a) (x : a) : Pomega :=
  {n | D.compact n <= x}

def representationDecode {a : Type u} [CompleteLattice a]
  (D : CountablyAlgebraic a) (x : Pomega) : a :=
  sSup (D.compact '' x)

theorem representationDecode_encode
  {a : Type u} [CompleteLattice a] (D : CountablyAlgebraic a) (x : a) :
  representationDecode D (representationEncode D x) = x := by
  apply le_antisymm
  * apply sSup_le
    rintro _ <n, hn, rfl>
    exact hn
  * calc
    x = sSup {k : a | IsCompact k /\ k <= x} := D.density x
    _ <= representationDecode D (representationEncode D x) := by
      apply sSup_le
      rintro k <hkc, hkc>
      obtain <n, rfl> := D.compact_complete k hkc
      exact le_sSup <n, hkc, rfl>

```

```

theorem representationEncode_fixed
  {a : Type u} [CompleteLattice a] (D : CountablyAlgebraic a) (x : a) :
  funOf (representClosureCode D) (representationEncode D x) =
    representationEncode D x := by
  rw [representClosureCode_app]
  ext n
  change D.compact n <=
    representationDecode D (representationEncode D x) <->
    D.compact n <= x
  rw [representationDecode_encode]

/-- The order isomorphism in Scott's representation theorem. -/
def representationOrderIso {a : Type u} [CompleteLattice a]
  (D : CountablyAlgebraic a) :
  a ?o Fixpoints (funOf (representClosureCode D)) where
  toFun x := <representationEncode D x, representationEncode_fixed D x>
  invFun y := representationDecode D y
  left_inv := representationDecode_encode D
  right_inv y := by
    apply Subtype.ext
    change representationEncode D (representationDecode D y) = y
    change representClosureCode D y = y
    rw [ <- representClosureCode_app, y.property]
  map_rel_iff' := by
    intro x y
    constructor
    * intro h
      rw [ <- representationDecode_encode D x,
        <- representationDecode_encode D y]
      apply sSup_le
      rintro _ <n, hn, rfl>
      exact le_sSup <n, h hn, rfl>
    * intro h n hn
      exact hn.trans h

/-- **Scott 1976, Theorem 5.2 (The representation theorem).**
The constructed code is a continuous closure operation and its fixed-point
range is order-isomorphic to the source lattice. -/
theorem theorem_5_2 {a : Type u} [CompleteLattice a]
  (D : CountablyAlgebraic a) :
  IsScottContinuous (representClosure D) /\
  IsClosure (representClosureCode D) /\
  exists phi : a -> Fixpoints (funOf (representClosureCode D)),
    Function.Bijective phi /\
    forall x y, x <= y <-> (phi x : Pomega) subseq phi y :=
<representClosure_isScottContinuous D,
  representClosureCode_isClosure D,
  <fun x => representationOrderIso D x,
  (representationOrderIso D).toEquiv.bijective,
  fun x y => by
    constructor
    * intro hxy
      exact (representationOrderIso D).map_rel_iff.mpr hxy
    * intro hsub
      exact (representationOrderIso D).map_rel_iff.mp hsub>>

/-- **Scott 1976, (5.12).** Unfolding of the boxed product. -/
theorem eq_5_12 (a b : Pomega) :
  boxTensor a b = graph (fun u =>
    squarePair (funOf a (squareFst u)) (funOf b (squareSnd u))) :=
  rfl

/-- **Scott 1976, (5.13).** Unfolding of the boxed sum. -/

```

```

theorem eq_5_13 (a b : Pomega) :
  boxPlus a b = graph (fun u =>
    dcondSet (condSet (squareFst u) (ofNat 0) (ofNat 0) U
      condSet (squareSnd u) (ofNat 1) (ofNat 1))
      (squarePair (funOf (boxShift a) (squareFst u)) botElem)
      (squarePair botElem (funOf (boxShift b) (squareSnd u)))) :=
  rfl

/-- Graph expansiveness `I subseteq fun x. f(x)` is value-expansiveness on finite sets. -/
theorem lcomb_subset_graph {f : Pomega -> Pomega} :
  lcomb subseteq graph f <-> forall n, e n subseteq f (e n) := by
  constructor
  * intro h n m hm
    have := h <n, m, rfl, hm>
    rcases this with <n', m', heq, hm'>
    obtain <rfl, rfl> := pair_inj heq
    exact hm'
  * intro h p hp
    rcases hp with <n, m, rfl, hm>
    exact <n, m, rfl, h n hm>

theorem squareFst_isScottContinuous : IsScottContinuous squareFst := by
  intro x
  ext n
  constructor
  * intro hn
    refine mem_scottUnion.mpr <2 ^ (2 * n), ?_, ?_>
    * simpa [e_pow2, Set.singleton_subset_iff, squareFst] using hn
    * simp [squareFst, e_pow2]
  * intro hn
    obtain <m, hm, hnm> := mem_scottUnion.mp hn
    exact hm hnm

theorem squareSnd_isScottContinuous : IsScottContinuous squareSnd := by
  intro x
  ext m
  constructor
  * intro hm
    refine mem_scottUnion.mpr <2 ^ (2 * m + 1), ?_, ?_>
    * simpa [e_pow2, Set.singleton_subset_iff, squareSnd] using hm
    * simp [squareSnd, e_pow2]
  * intro hm
    obtain <k, hk, hkm> := mem_scottUnion.mp hm
    exact hk hkm

theorem squarePair_mono {x x' y y' : Pomega} (hx : x subseteq x') (hy : y subseteq y') :
  squarePair x y subseteq squarePair x' y' := by
  intro k hk
  rcases hk with <n, hn, hk> | <m, hm, hk>
  * exact Or.inl <n, hx hn, hk>
  * exact Or.inr <m, hy hm, hk>

theorem squarePair_isScottContinuous_left (y : Pomega) :
  IsScottContinuous (fun x => squarePair x y) := by
  intro x
  ext k
  constructor
  * intro hk
    rcases hk with <n, hn, hk> | <m, hm, hk>
    * exact mem_scottUnion.mpr <2 ^ n, by simp [e_pow2, Set.singleton_subset_iff, hn],
      Or.inl <n, by simp [e_pow2], hk>>
    * exact mem_scottUnion.mpr <0, by simp [e_zero], Or.inr <m, hm, hk>>
  * intro hk

```



```

    obtain <p, hp, hkp> := mem_scottUnion.mp hk
    rcases hkp with <n, hn, hk> | <m, hm, hk>
    * exact Or.inl <n, hp hn, hk>
    * exact Or.inr <m, hm, hk>

theorem squarePair_isScottContinuous_right (x : Pomega) :
  IsScottContinuous (fun y => squarePair x y) := by
  intro y
  ext k
  constructor
  * intro hk
    rcases hk with <n, hn, hk> | <m, hm, hk>
    * exact mem_scottUnion.mpr <0, by simp [e_zero], Or.inl <n, hn, hk>>
    * exact mem_scottUnion.mpr <2 ^ m, by simp [e_pow2, Set.singleton_subset_iff, hm],
      Or.inr <m, by simp [e_pow2], hk>>
  * intro hk
    obtain <p, hp, hkp> := mem_scottUnion.mp hk
    rcases hkp with <n, hn, hk> | <m, hm, hk>
    * exact Or.inl <n, hn, hk>
    * exact Or.inr <m, hp hm, hk>

theorem boxTensor_app (a b u : Pomega) :
  funOf (boxTensor a b) u =
    squarePair (funOf a (squareFst u)) (funOf b (squareSnd u)) :=
  beta (theorem_1_3_tuple
    (f := fun x y => squarePair (funOf a x) (funOf b y))
    (fun y => theorem_1_3 (f := fun x => squarePair x (funOf b y)) (g := funOf a)
      (squarePair_isScottContinuous_left (funOf b y))
      (funOf_isScottContinuous a))
    (fun x => theorem_1_3 (f := fun y => squarePair (funOf a x) y) (g := funOf b)
      (squarePair_isScottContinuous_right (funOf a x))
      (funOf_isScottContinuous b))
    squareFst_isScottContinuous squareSnd_isScottContinuous) u

theorem boxTensor_isRetract {a b : Pomega} (ha : IsRetract a) (hb : IsRetract b) :
  IsRetract (boxTensor a b) := by
  change boxTensor a b =
    graph (fun u => funOf (boxTensor a b) (funOf (boxTensor a b) u))
  apply graph_ext
  intro u
  rw [boxTensor_app, boxTensor_app, eq_5_9, eq_5_10, retract_app ha, retract_app hb]

theorem Icomb_subset_boxTensor {a b : Pomega} (ha : IsClosure a) (hb : IsClosure b) :
  Icomb_subseteq boxTensor a b := by
  intro p hp
  rcases hp with <n, m, rfl, hm>
  have hsub : squarePair (squareFst (e n)) (squareSnd (e n)) subseteq
    squarePair (funOf a (squareFst (e n))) (funOf b (squareSnd (e n))) := by
    refine squarePair_mono ?_ ?_
    * have := funOf_monotone_left ha.1 (squareFst (e n))
      rwa [Icomb_app] at this
    * have := funOf_monotone_left hb.1 (squareSnd (e n))
      rwa [Icomb_app] at this
  refine <n, m, rfl, ?_>
  exact hsub (by simp [eq_5_8] using hm)

/-- **Scott 1976, Theorem 5.4 (product half).** The boxed product of two
closures is a closure. -/
theorem theorem_5_4 {a b : Pomega} (ha : IsClosure a) (hb : IsClosure b) :
  IsClosure (boxTensor a b) :=
  <Icomb_subset_boxTensor ha hb, boxTensor_isRetract ha.2 hb.2>

theorem squarePair_inj {x x' y y' : Pomega}

```

```

    (h : squarePair x y = squarePair x' y') : x = x' /\ y = y' :=
    <(eq_5_9 x y).symm.trans ((congrArg squareFst h).trans (eq_5_9 x' y')),
    (eq_5_10 x y).symm.trans ((congrArg squareSnd h).trans (eq_5_10 x' y'))>

/-- **Scott 1976, Theorem 5.4 / analogue of 4.4.** A boxed pair is typed
for `?` iff its components are typed. -/
theorem typed_squarePair_boxTensor (a b x y : Pomega) :
  typed (squarePair x y) (boxTensor a b) <-> typed x a /\ typed y b := by
  constructor
  * intro h
    have : squarePair x y = squarePair (funOf a x) (funOf b y) := by
      simpa [typed, boxTensor_app, eq_5_9, eq_5_10] using h
    exact squarePair_inj this
  * intro <hx, hy>
    rw [typed, boxTensor_app, eq_5_9, eq_5_10, <- hx, <- hy]

/-- **Scott 1976, Theorem 5.4 / analogue of 4.4.** Projections of a
`?-typed point remain typed. -/
theorem typed_of_boxTensor {a b u : Pomega} (hu : typed u (boxTensor a b)) :
  typed (squareFst u) a /\ typed (squareSnd u) b := by
  have : u = squarePair (funOf a (squareFst u)) (funOf b (squareSnd u)) := by
    simpa [typed, boxTensor_app] using hu
  exact <congrArg squareFst this |>.trans (eq_5_9 _ _),
    congrArg squareSnd this |>.trans (eq_5_10 _ _)>

/-- **Scott 1976, Theorem 5.5 / (5.18).** `V` fixes closures on values. -/
theorem theorem_5_5 {a : Pomega} (ha : IsClosure a) (x : Pomega) :
  Vapply a x = funOf a x /\ Vapply a (Vapply a x) = Vapply a x :=
  <eq_5_18_eq ha x, eq_5_17 a x>

theorem Icomb_isClosure : IsClosure Icomb :=
  <subset_refl, Icomb_isRetract>

/-- **Scott 1976, S5.** `int` is a closure: `I subseteq int = int comp int`. -/
theorem Icomb_subset_intR : Icomb subseteq intrR := by
  intro p hp
  rcases hp with <n, m, rfl, hm>
  have hsub : e n subseteq funOf intrR (e n) := by
    by_cases hbot : e n = botElem
    * rw [hbot, intrR_bot]
    * by_cases hsing : exists k, e n = ofNat k
      * obtain <k, hk> := hsing
      rw [hk, intrR_ofNat]
      * have hne : (e n).Nonempty := by
          rw [Set.nonempty_iff_ne_empty]
          simpa [botElem] using hbot
      rw [intrR_top_of_nonsingleton (sInf (e n)) (e n) (Nat.sInf_mem hne)
        (fun k hk => Nat.sInf_le hk) hbot (fun k hk => hsing <k, hk>)]
      exact fun _ => Set.mem_univ _
  rw [intrR_isGraph]
  exact <n, m, rfl, hsub hm>

theorem intrR_isClosure : IsClosure intrR :=
  <Icomb_subset_intR, intrR_isRetract>

/-- **Scott 1976, (5.1).** Every set is below its graph, so `fun` is a closure. -/
theorem Icomb_subset_funRetract : Icomb subseteq funRetract := by
  intro p hp
  rcases hp with <n, m, rfl, hm>
  exact <n, m, rfl, eq_5_1 (e n) hm>

theorem funRetract_isClosure : IsClosure funRetract :=
  <Icomb_subset_funRetract, funRetract_isRetract>

```

```

theorem union_left_isScottContinuous (c : Pomega) :
  IsScottContinuous (fun x => x U c) := by
  intro x
  ext k
  constructor
  * intro hk
    rcases hk with hk | hk
    * have : k in scottUnion (fun z => z) x := by
      rw [ <- id_isScottContinuous x]; exact hk
      obtain <n, hn, hkn> := mem_scottUnion.mp this
      exact mem_scottUnion.mpr <n, hn, Or.inl hkn>
    * exact mem_scottUnion.mpr <0, by simp [e_zero], Or.inr hk>
  * intro hk
    obtain <n, hn, hkn> := mem_scottUnion.mp hk
    rcases hkn with hkn | hkn
    * exact Or.inl (isScottContinuous_monotone id_isScottContinuous hn hkn)
    * exact Or.inr hkn

theorem union_const_left_isScottContinuous (c : Pomega) :
  IsScottContinuous (fun x => c U x) := by
  have : (fun x : Pomega => c U x) = (fun x => x U c) := by
    funext x; exact Set.union_comm c x
  rw [this]
  exact union_left_isScottContinuous c

theorem predSet_union (x y : Pomega) :
  predSet (x U y) = predSet x U predSet y := by
  ext k; simp [predSet]

theorem predSet_succSet (x : Pomega) : predSet (succSet x) = x := by
  ext k
  constructor
  * intro <n, hn, heq>
    exact (Nat.succ_injective heq) |> hn
  * intro hk
    exact <k, hk, rfl>

theorem squareFst_bot : squareFst botElem = botElem := by

```

Lean 4 source (lines 801–1200)

```

  ext n
  simp [squareFst, botElem]

theorem squareFst_top : squareFst topElem = topElem := by
  ext n
  constructor
  * intro; exact Set.mem_univ n
  * intro; exact Set.mem_univ (2 * n)

theorem squareSnd_top : squareSnd topElem = topElem := by
  ext m
  constructor
  * intro; exact Set.mem_univ m
  * intro; exact Set.mem_univ (2 * m + 1)

theorem squareSnd_bot : squareSnd botElem = botElem := by
  ext m
  simp [squareSnd, botElem]

theorem squarePair_bot_bot : squarePair botElem botElem = (botElem : Pomega) := by
  ext k
  simp [squarePair, botElem]

```

```

theorem topElem_ne_botElem : (topElem : Pomega) != botElem := by
  intro h
  have h0 : (0 : Nat) in (botElem : Pomega) := h |> Set.mem_univ 0
  simp [botElem] at h0

theorem union_botElem (x : Pomega) : x U botElem = x := Set.union_empty x

theorem botElem_union (x : Pomega) : botElem U x = x := Set.empty_union x

theorem exists_mem_of_ne_bot {x : Pomega} (h : x != botElem) : exists m, m in x := by
  by_contra hc
  refine h ?_
  ext n
  simp only [mem_botElem, iff_false]
  exact fun hn => hc <n, hn>

theorem boxShift_map_isScottContinuous (a : Pomega) :
  IsScottContinuous (fun x => ofNat 0 U succSet (funOf a (predSet x))) :=
  theorem_1_3 (union_const_left_isScottContinuous (ofNat 0))
  (theorem_1_3 succSet_isScottContinuous
    (theorem_1_3 (funOf_isScottContinuous a) predSet_isScottContinuous))

theorem boxShift_app (a x : Pomega) :
  funOf (boxShift a) x = ofNat 0 U succSet (funOf a (predSet x)) :=
  beta (boxShift_map_isScottContinuous a) x

theorem boxShift_isRetract {a : Pomega} (ha : IsRetract a) :
  IsRetract (boxShift a) := by
  change boxShift a =
  graph (fun x => funOf (boxShift a) (funOf (boxShift a) x))
  apply graph_ext
  intro x
  rw [boxShift_app, boxShift_app]
  have hpred : predSet (ofNat 0 U succSet (funOf a (predSet x))) =
    funOf a (predSet x) := by
    rw [predSet_union, predSet_ofNat_zero, predSet_succSet]
    simp [botElem]
  rw [hpred, retract_app ha]

theorem zero_mem_boxShift_app (a x : Pomega) : (0 : Nat) in funOf (boxShift a) x := by
  rw [boxShift_app]
  exact Or.inl (by simp [ofNat])

theorem boxShift_app_ne_bot (a x : Pomega) : funOf (boxShift a) x != botElem := by
  intro h
  have h0 := zero_mem_boxShift_app a x
  rw [h] at h0
  simp [botElem] at h0

theorem boxTag_isScottContinuous (i : Nat) : IsScottContinuous (boxTag i) := by
  have hfun : boxTag i = fun z => condSet z (ofNat i) (ofNat i) := rfl
  rw [hfun]
  exact condSet_isScottContinuous_left (ofNat i) (ofNat i)

theorem boxTag_bot (i : Nat) : boxTag i botElem = botElem := by
  ext n
  simp [boxTag, condSet, botElem]

theorem boxTag_of_mem {x : Pomega} {m : Nat} (hm : m in x) (i : Nat) :
  boxTag i x = ofNat i := by
  ext n
  simp only [boxTag, condSet, Set.mem_union, Set.mem_ofPred_eq]

```

```

constructor
* rintro (<hn, _> | <hn, _>) <;> exact hn
* intro hn
  cases m with
  | zero => exact Or.inl <hn, hm>
  | succ k => exact Or.inr <hn, k, hm>

theorem boxPlus_test_isScottContinuous :
  IsScottContinuous (fun u => boxTag 0 (squareFst u) U boxTag 1 (squareSnd u)) :=
  theorem_1_3_tuple
    (fun y => union_left_isScottContinuous y)
    (fun x => union_const_left_isScottContinuous x)
    (theorem_1_3 (boxTag_isScottContinuous 0) squareFst_isScottContinuous)
    (theorem_1_3 (boxTag_isScottContinuous 1) squareSnd_isScottContinuous)

theorem boxPlus_map_isScottContinuous (a b : Pomega) :
  IsScottContinuous (fun u =>
    dcondSet (boxTag 0 (squareFst u) U boxTag 1 (squareSnd u))
      (squarePair (funOf (boxShift a) (squareFst u)) botElem)
      (squarePair botElem (funOf (boxShift b) (squareSnd u)))) :=
  theorem_1_3_nary
    (fun y z => dcondSet_isScottContinuous_left y z)
    (fun x z => dcondSet_isScottContinuous_mid x z)
    (fun x y => dcondSet_isScottContinuous_right x y)
    boxPlus_test_isScottContinuous
    (theorem_1_3 (f := fun x => squarePair x botElem)
      (g := fun u => funOf (boxShift a) (squareFst u))
      (squarePair_isScottContinuous_left botElem)
      (theorem_1_3 (funOf_isScottContinuous (boxShift a)) squareFst_isScottContinuous))
    (theorem_1_3 (f := fun y => squarePair botElem y)
      (g := fun u => funOf (boxShift b) (squareSnd u))
      (squarePair_isScottContinuous_right botElem)
      (theorem_1_3 (funOf_isScottContinuous (boxShift b)) squareSnd_isScottContinuous))

theorem boxPlus_app (a b u : Pomega) :
  funOf (boxPlus a b) u =
    dcondSet (boxTag 0 (squareFst u) U boxTag 1 (squareSnd u))
      (squarePair (funOf (boxShift a) (squareFst u)) botElem)
      (squarePair botElem (funOf (boxShift b) (squareSnd u))) :=
  beta (boxPlus_map_isScottContinuous a b) u

/-- Occupancy test of (5.13): only the left component is inhabited. -/
theorem boxPlus_app_left {a b u : Pomega} (hx : squareFst u != botElem)
  (hy : squareSnd u = botElem) :
  funOf (boxPlus a b) u =
    squarePair (funOf (boxShift a) (squareFst u)) botElem := by
  obtain <m, hm> := exists_mem_of_ne_bot hx
  rw [boxPlus_app, boxTag_of_mem hm, hy, boxTag_bot, union_botElem,
    dcondSet_ofNat_zero]

/-- Occupancy test of (5.13): only the right component is inhabited. -/
theorem boxPlus_app_right {a b u : Pomega} (hx : squareFst u = botElem)
  (hy : squareSnd u != botElem) :
  funOf (boxPlus a b) u =
    squarePair botElem (funOf (boxShift b) (squareSnd u)) := by
  obtain <m, hm> := exists_mem_of_ne_bot hy
  rw [boxPlus_app, boxTag_of_mem hm, hx, boxTag_bot, botElem_union,
    dcondSet_ofNat_one]

/-- Occupancy test of (5.13): both components inhabited, so (4.4) gives `top`. -/
theorem boxPlus_app_mixed {a b u : Pomega} (hx : squareFst u != botElem)
  (hy : squareSnd u != botElem) :
  funOf (boxPlus a b) u = topElem := by

```

```

obtain <m, hm> := exists_mem_of_ne_bot hx
obtain <k, hk> := exists_mem_of_ne_bot hy
rw [boxPlus_app, boxTag_of_mem hm, boxTag_of_mem hk]
exact dcondSet_of_mixed (by simp [ofNat]) <0, by simp [ofNat]>

/-- Occupancy test of (5.13): neither component inhabited, so the value is `False`. -/
theorem boxPlus_app_empty {a b u : Pomega} (hx : squareFst u = botElem)
  (hy : squareSnd u = botElem) :
  funOf (boxPlus a b) u = botElem := by
  rw [boxPlus_app, hx, hy, boxTag_bot, boxTag_bot, Set.union_self, dcondSet_bot]

theorem boxPlus_app_bot (a b : Pomega) :
  funOf (boxPlus a b) botElem = botElem :=
  boxPlus_app_empty squareFst_bot squareSnd_bot

theorem boxPlus_app_top (a b : Pomega) :
  funOf (boxPlus a b) topElem = topElem :=
  boxPlus_app_mixed (by rw [squareFst_top]; exact topElem_ne_botElem)
  (by rw [squareSnd_top]; exact topElem_ne_botElem)

theorem boxPlus_app_app {a b : Pomega} (ha : IsRetract a) (hb : IsRetract b)
  (u : Pomega) :
  funOf (boxPlus a b) (funOf (boxPlus a b) u) = funOf (boxPlus a b) u := by
  by_cases hx : squareFst u = botElem <;> by_cases hy : squareSnd u = botElem
  * rw [boxPlus_app_empty hx hy, boxPlus_app_bot]
  * rw [boxPlus_app_right hx hy,
    boxPlus_app_right (u := squarePair botElem (funOf (boxShift b) (squareSnd u)))
    (eq_5_9 _ _) (by rw [eq_5_10]; exact boxShift_app_ne_bot b _),
    eq_5_10, retract_app (boxShift_isRetract hb)]
  * rw [boxPlus_app_left hx hy,
    boxPlus_app_left (u := squarePair (funOf (boxShift a) (squareFst u)) botElem)
    (by rw [eq_5_9]; exact boxShift_app_ne_bot a _) (eq_5_10 _ _),
    eq_5_9, retract_app (boxShift_isRetract ha)]
  * rw [boxPlus_app_mixed hx hy, boxPlus_app_top]

/-- **Scott 1976, Theorem 5.4 (sum half), idempotence.** -/
theorem boxPlus_isRetract {a b : Pomega} (ha : IsRetract a) (hb : IsRetract b) :
  IsRetract (boxPlus a b) := by
  change boxPlus a b =
  graph (fun u => funOf (boxPlus a b) (funOf (boxPlus a b) u))
  apply graph_ext
  intro u
  rw [boxPlus_app_app ha hb u, boxPlus_app]

theorem boxShift_expansive {a : Pomega} (ha : IsClosure a) (x : Pomega) :
  x subseq funOf (boxShift a) x := by
  rw [boxShift_app]
  intro k hk
  cases k with
  | zero => exact Or.inl rfl
  | succ k =>
    refine Or.inr <k, ?, rfl>
    have hx : predSet x subseq funOf a (predSet x) := by
      have := funOf_monotone_left ha.1 (predSet x)
      rwa [Icomb_app] at this
    exact hx hk

theorem Icomb_subset_boxShift {a : Pomega} (ha : IsClosure a) :
  Icomb subseq boxShift a :=
  Icomb_subset_graph.mpr fun n => by
  rw [← boxShift_app]
  exact boxShift_expansive ha (e n)

```

```

theorem boxShift_isClosure {a : Pomega} (ha : IsClosure a) :
  IsClosure (boxShift a) :=
  <Icomb_subset_boxShift ha, boxShift_isRetract ha.2>

/-- **Scott 1976, Theorem 5.4 (sum half), expansiveness.** Each of the four
occupancy cases of (5.13) is expansive: on a one-sided `u` the shift `a`
is expansive by `boxShift_expansive` and (5.8) rebuilds `u`, while mixed
`u` goes to `top` and empty `u` is `False`. -/
theorem boxPlus_expansive {a b : Pomega} (ha : IsClosure a) (hb : IsClosure b)
  (u : Pomega) : u subseteq funOf (boxPlus a b) u := by
  have h8 : squarePair (squareFst u) (squareSnd u) = u := eq_5_8 u
  by_cases hx : squareFst u = botElem <|> by_cases hy : squareSnd u = botElem
  * rw [hx, hy, squarePair_bot_bot] at h8
  rw [boxPlus_app_empty hx hy, <- h8]
  * rw [boxPlus_app_right hx hy]
  have hsub : squarePair (squareFst u) (squareSnd u) subseteq
    squarePair botElem (funOf (boxShift b) (squareSnd u)) := by
    rw [hx]
    exact squarePair_mono subset_rfl (boxShift_expansive hb (squareSnd u))
  rwa [h8] at hsub
  * rw [boxPlus_app_left hx hy]
  have hsub : squarePair (squareFst u) (squareSnd u) subseteq
    squarePair (funOf (boxShift a) (squareFst u)) botElem := by
    rw [hy]
    exact squarePair_mono (boxShift_expansive ha (squareFst u)) subset_rfl
  rwa [h8] at hsub
  * rw [boxPlus_app_mixed hx hy]
  exact fun k _ => Set.mem_univ k

theorem Icomb_subset_boxPlus {a b : Pomega} (ha : IsClosure a) (hb : IsClosure b) :
  Icomb_subseteq boxPlus a b :=
  Icomb_subset_graph.mpr fun n => by
    rw [ <- boxPlus_app ]
    exact boxPlus_expansive ha hb (e n)

/-- **Scott 1976, Theorem 5.4 (sum half).** If `a` and `b` are closure
operations then so is `a ? b`. -/
theorem theorem_5_4_plus {a b : Pomega} (ha : IsClosure a) (hb : IsClosure b) :
  IsClosure (boxPlus a b) :=
  <Icomb_subset_boxPlus ha hb, boxPlus_isRetract ha.2 hb.2>

theorem boxPlus_typed_bot (a b : Pomega) :
  typed botElem (boxPlus a b) :=
  (boxPlus_app_bot a b).symm

theorem boxPlus_typed_top (a b : Pomega) :
  typed topElem (boxPlus a b) :=
  (boxPlus_app_top a b).symm

/-- **Scott 1976, Theorem 5.4 / analogue of 4.5.** Left injection into the
paper sum, on the shifted summand. -/
theorem boxPlus_typed_inl {a b x : Pomega} (hx : typed x (boxShift a)) :
  typed (squarePair x botElem) (boxPlus a b) := by
  have hx0 : x != botElem := by
    rw [hx]; exact boxShift_app_ne_bot a x
  rw [typed, boxPlus_app_left (by rw [eq_5_9]; exact hx0) (eq_5_10 _ _), eq_5_9,
    <- hx]

/-- **Scott 1976, Theorem 5.4 / analogue of 4.5.** Right injection into the
paper sum, on the shifted summand. -/
theorem boxPlus_typed_inr {a b y : Pomega} (hy : typed y (boxShift b)) :
  typed (squarePair botElem y) (boxPlus a b) := by
  have hy0 : y != botElem := by

```

```

    rw [hy]; exact boxShift_app_ne_bot b y
  rw [typed, boxPlus_app_right (eq_5_9 _ _) (by rw [eq_5_10]; exact hy0), eq_5_10,
    <- hy]

/-- **Scott 1976, Theorem 5.4 / analogue of 4.5.** Range of the paper sum. -/
theorem boxPlus_typed_iff {a b u : Pomega} (ha : IsRetract a) (hb : IsRetract b) :
  typed u (boxPlus a b) <->
    u = botElem \/\ u = topElem \/\
      (exists x, u = squarePair x botElem /\ typed x (boxShift a)) \/\
      (exists y, u = squarePair botElem y /\ typed y (boxShift b)) := by
  constructor
* intro hu
  have hu' : u = funOf (boxPlus a b) u := hu
  by_cases hx : squareFst u = botElem <=> by_cases hy : squareSnd u = botElem
* exact Or.inl (hu'.trans (boxPlus_app_empty hx hy))
* refine Or.inr (Or.inr (Or.inr <funOf (boxShift b) (squareSnd u), ?_, ?_>))
  * exact hu'.trans (boxPlus_app_right hx hy)
  * exact (retract_app (boxShift_isRetract hb) (squareSnd u)).symm
* refine Or.inr (Or.inr (Or.inl <funOf (boxShift a) (squareFst u), ?_, ?_>))
  * exact hu'.trans (boxPlus_app_left hx hy)
  * exact (retract_app (boxShift_isRetract ha) (squareFst u)).symm
* exact Or.inr (Or.inl (hu'.trans (boxPlus_app_mixed hx hy)))
* intro h
  rcases h with hu | hu | <x, hx, hxt> | <y, hy, hyt>
* rw [hu]; exact boxPlus_typed_bot a b
* rw [hu]; exact boxPlus_typed_top a b
* rw [hx]; exact boxPlus_typed_inl hxt
* rw [hy]; exact boxPlus_typed_inr hyt

theorem Vapply_left_isScottContinuous (x : Pomega) :
  IsScottContinuous (fun a => Vapply a x) := by
  have : (fun a => Vapply a x) = (fun a => VapplyY a x) := by
    funext a; exact (eq_5_14 a x).symm
  rw [this]
  exact fix_param_isScottContinuous
    (fun y => union_right_isScottContinuous x (funOf_isScottContinuous_left y))
    (fun a => Vstep_isScottContinuous a x)

theorem Vapply_right_isScottContinuous (a : Pomega) :
  IsScottContinuous (fun x => Vapply a x) := by
  have : (fun x => Vapply a x) = (fun x => VapplyY a x) := by
    funext x; exact (eq_5_14 a x).symm
  rw [this]
  exact fix_param_isScottContinuous
    (fun y => union_left_isScottContinuous (funOf a y))
    (fun x => Vstep_isScottContinuous a x)

/-- **Scott 1976, (5.14).** The universe combinator. -/
def Vcomb : Pomega :=
  graph (fun a => graph (fun x => Vapply a x))

theorem Vcomb_app (a : Pomega) :
  funOf Vcomb a = graph (fun x => Vapply a x) :=
  beta (graph_const_isScottContinuous (fun a x => Vapply a x)
    (fun x => Vapply_left_isScottContinuous x)) a

/-- **Scott 1976, (5.18).** `a = V(a)` iff `a` is a closure. -/
theorem theorem_5_5_iff (a : Pomega) :
  IsClosure a <-> funOf Vcomb a = a := by
  constructor
* intro ha
  rw [Vcomb_app]
  have : graph (fun x => Vapply a x) = graph (funOf a) :=

```



```

graph_ext fun x => eq_5_18_eq ha x
exact this.trans (retract_isGraph ha.2)
* intro h
have ha : a = graph (fun x => Vapply a x) :=
  h.symm.trans (Vcomb_app a)
have happ : forall x, funOf a x = Vapply a x := by
  intro x
  conv_lhs => rw [ha]
  exact beta (Vapply_right_isScottContinuous a) x
constructor
* intro p hp
rcases hp with <n, m, rfl, hm>
have : pair n m in graph (fun x => Vapply a x) :=
  <n, m, rfl, eq_5_16 a (e n) hm>
rwa [ <- ha] at this
* have : graph (fun x => Vapply a x) =
  graph (fun x => funOf a (funOf a x)) :=
  graph_ext fun x =>
    calc Vapply a x
      = Vapply a (Vapply a x) := (eq_5_17 a x).symm
      _ = funOf a (Vapply a x) := (happ (Vapply a x)).symm
      _ = funOf a (funOf a x) := by rw [ <- happ x]
  exact ha.trans this

/-- **Scott 1976, (5.19).** `V(a)` is always a closure, so `V(V(a)) = V(a)`. -/
theorem Vapply_graph_isClosure (a : Pomega) :
  IsClosure (graph (fun x => Vapply a x)) := by
  constructor
* intro p hp
rcases hp with <n, m, rfl, hm>
exact <n, m, rfl, eq_5_16 a (e n) hm>
* change graph (fun x => Vapply a x) =
  graph (fun x =>
    funOf (graph (fun z => Vapply a z))
      (funOf (graph (fun z => Vapply a z)) x))
  apply graph_ext
  intro x
  have happ : funOf (graph (fun z => Vapply a z)) =
    fun z => Vapply a z :=
    theorem_1_2_i (Vapply_right_isScottContinuous a)
  simp [happ] using (eq_5_17 a x).symm

theorem eq_5_19 (a : Pomega) :
  funOf Vcomb (funOf Vcomb a) = funOf Vcomb a := by
  have hcl := Vapply_graph_isClosure a
  have hfix := (theorem_5_5_iff (graph (fun x => Vapply a x))).mp hcl
  have ha : funOf Vcomb a = graph (fun x => Vapply a x) := Vcomb_app a
  rw [ha]
  exact hfix

/-- **Scott 1976, (5.21).** `a` subseteq `V(a)`. -/
theorem eq_5_21 (a : Pomega) : a subseteq funOf Vcomb a := by
  rw [Vcomb_app]
  exact (eq_5_1 a).trans (xi_star fun x => eq_5_18_rev a x)

theorem Vcomb_isRetract : IsRetract Vcomb := by
  change Vcomb = graph (fun a => funOf Vcomb (funOf Vcomb a))
  apply graph_ext
  intro a
  exact (Vcomb_app a).symm.trans (eq_5_19 a).symm

theorem Icomb_subset_Vcomb : Icomb subseteq Vcomb := by
  intro p hp

```

Lean 4 source (lines 1201–1565)

```

rcases hp with <n, m, rfl, hm>
have : m in funOf Vcomb (e n) := eq_5_21 (e n) hm
have ha : funOf Vcomb (e n) = graph (fun x => Vapply (e n) x) :=
  Vcomb_app (e n)
refine <n, m, rfl, ?_>
rwa [ha] at this

/-- **Scott 1976, Theorem 5.5.** `V` itself is a closure, and its fixed
points are exactly the closure operations. -/
theorem theorem_5_5_universe :
  IsClosure Vcomb /\ forall a, IsClosure a <-> typed a Vcomb :=
  <<Icomb_subset_Vcomb, Vcomb_isRetract>,
  fun a => (theorem_5_5_iff a).trans <Eq.symm, Eq.symm>>

/-- `V` does not change already-closed points of a retract. -/
theorem typed_of_retract_Vcomb {a x : Pomega} (hx : typed x a) :
  typed x (funOf Vcomb a) := by
  rw [typed, Vcomb_app]
  have happ : funOf (graph (fun z => Vapply a z)) x = Vapply a x :=
    beta (Vapply_right_isScottContinuous a) x
  rw [happ]
  apply subset_antisymm
  * exact eq_5_16 a x
  * intro k hk
    exact hk x <subset_rfl, by rw [ <- hx]>

/-- Kleene iterates of `I` under a closure-preserving operator stay closures. -/
theorem theorem_5_6_iterates {F : Pomega -> Pomega}
  (_hF : IsScottContinuous F)
  (hcl : forall a, IsClosure a -> IsClosure (F a)) :
  (forall n, IsClosure (iterateFrom F Icomb n)) /\
  Icomb subseq lfpAbove F Icomb := by
  have hiter : forall n, IsClosure (iterateFrom F Icomb n) := by
    intro n
    induction n with
    | zero => exact Icomb_isClosure
    | succ n ih => exact hcl _ ih
  exact <hiter, Set.subset_iUnion (iterateFrom F Icomb) 0>

/-- **Scott 1976, Theorem 5.6 (The limit theorem for algebraic lattices).**
`(fun f : V comp -> V. Y(f)) : (V comp -> V) comp -> V`. -/
theorem theorem_5_6 {f : Pomega} (hf : typed f (arrowR Vcomb Vcomb)) :
  typed (funOf Ycomb f) Vcomb := by
  set y := funOf Ycomb f
  have hy : y = funOf f y := Ycomb_unfold f
  have hf' : forall x, funOf f x = funOf Vcomb (funOf f (funOf Vcomb x)) := by
    intro x
    simp [comp_app] using congrArg (fun w => funOf w x) (typed_of_arrowR hf)
  have hyV : y = funOf Vcomb (funOf f (funOf Vcomb y)) :=
    hy.trans (hf' y)
  have h1 : funOf Vcomb y = funOf Vcomb (funOf f y) :=
    congrArg (funOf Vcomb) hy
  have h2 : funOf Vcomb (funOf f y) =
    funOf Vcomb (funOf Vcomb (funOf f (funOf Vcomb y))) :=
    congrArg (funOf Vcomb) (hf' y)
  have h3 : funOf Vcomb (funOf Vcomb (funOf f (funOf Vcomb y))) =
    funOf Vcomb (funOf f (funOf Vcomb y)) :=
    retract_app Vcomb_isRetract _
  exact (h1.trans (h2.trans (h3.trans hyV.symm))).symm

/-- **Scott 1976, Theorem 5.6, combinator form.**

```

```

` (fun f : V comp -> V. Y(f)) : (V comp -> V) comp -> V`. -/
theorem theorem_5_6_combinator :
  typed (comp Ycomb (arrowR Vcomb Vcomb))
  (arrowR (arrowR Vcomb Vcomb) Vcomb) := by
  rw [typed, arrowR_app]
  apply graph_ext
  intro f
  have hV : IsClosure Vcomb := theorem_5_5_universe.1
  have harr : IsRetract (arrowR Vcomb Vcomb) := theorem_5_3 hV hV
  have hf' : typed (funOf (arrowR Vcomb Vcomb) f) (arrowR Vcomb Vcomb) :=
    (retract_app harr f).symm
  have hy := theorem_5_6 hf'
  simp only [comp_app]
  rw [retract_app harr]
  exact hy

/-- Isolated points of a closure are its values on finite sets, and
conversely every `a(e n)` is a typed point. -/
theorem theorem_5_1_isolated {a : Pomega} (_ha : IsClosure a) {x : Pomega}
(hx : typed x a) :
  IsIsolated x -> exists n, x = funOf a (e n) := by
  intro <n, hn>
  refine <n, ?_>
  rw [hn] at hx |-
  exact hx

/-- **Scott 1976, Theorem 5.3.** The function space of two closures is a
closure: it is a retract and contains `I`. -/
theorem Icomb_subset_arrowR {a b : Pomega} (ha : IsClosure a) (hb : IsClosure b) :
  Icomb subsesteq arrowR a b := by
  intro p hp
  rcases hp with <n, m, rfl, hm>
  have h1 : e n subsesteq graph (fun x => funOf (e n) x) := eq_5_1 (e n)
  have h2 : graph (fun x => funOf (e n) x) subsesteq
    graph (fun x => funOf b (funOf (e n) (funOf a x))) :=
    xi_star (fun x => eq_5_11 ha hb)
  have h3 :
    graph (fun x => funOf b (funOf (e n) (funOf a x))) =
    comp b (comp (e n) a) := by
    apply congrArg graph
    funext x
    simp [comp_app]
  have hsub : e n subsesteq comp b (comp (e n) a) := by
    rw [← h3]; exact h1.trans h2
  exact <n, m, rfl, hsub hm>

/-- **Scott 1976, (5.2).** `I` subsesteq `I` comp -> `I`. -/
theorem eq_5_2 : Icomb subsesteq arrowR Icomb Icomb :=
  Icomb_subset_arrowR Icomb_isClosure Icomb_isClosure

theorem theorem_5_3_closure {a b : Pomega} (ha : IsClosure a) (hb : IsClosure b) :
  IsClosure (arrowR a b) :=
  <Icomb_subset_arrowR ha hb, theorem_5_3 ha hb>

/-- **Scott 1976, (5.22).** Boxed product of closures is a closure, so
the map is typed on `V`. -/
theorem eq_5_22 {a b : Pomega} (ha : typed a Vcomb) (hb : typed b Vcomb) :
  typed (boxTensor a b) Vcomb :=
  (theorem_5_5_universe.2 (boxTensor a b)).mp
  (theorem_5_4 ((theorem_5_5_universe.2 a).mpr ha)
    ((theorem_5_5_universe.2 b).mpr hb))

/-- **Scott 1976, (5.23).** Boxed sum of closures is a closure, so the map

```

```

is typed on `V`. -/
theorem eq_5_23 {a b : Pomega} (ha : typed a Vcomb) (hb : typed b Vcomb) :
  typed (boxPlus a b) Vcomb :=
  (theorem_5_5_universe.2 (boxPlus a b)).mp
  (theorem_5_4_plus ((theorem_5_5_universe.2 a).mpr ha)
    ((theorem_5_5_universe.2 b).mpr hb))

/-- **Scott 1976, (5.24).** Function space of closures is a closure. -/
theorem eq_5_24 {a b : Pomega} (ha : typed a Vcomb) (hb : typed b Vcomb) :
  typed (arrowR a b) Vcomb :=
  (theorem_5_5_universe.2 (arrowR a b)).mp
  (theorem_5_3_closure ((theorem_5_5_universe.2 a).mpr ha)
    ((theorem_5_5_universe.2 b).mpr hb))

/-- **Scott 1976, (5.25).** Step of `Y(fun a. I U (a comp -> a))`. -/
def selfArrowStep (a : Pomega) : Pomega := Icomb U arrowR a a

theorem arrowR_diag_isScottContinuous :
  IsScottContinuous (fun a => arrowR a a) := by
  have hbody : forall u, IsScottContinuous (fun a =>
    graph (fun x => funOf a (funOf u (funOf a x)))) :=
    fun u =>
      graph_const_isScottContinuous
        (fun a x => funOf a (funOf u (funOf a x)))
        (fun x =>
          theorem_1_3_tuple
            (f := fun a b => funOf a (funOf u (funOf b x)))
            (fun b => funOf_isScottContinuous_left (funOf u (funOf b x)))
            (fun a =>
              theorem_1_3 (funOf_isScottContinuous a)
                (theorem_1_3 (funOf_isScottContinuous u)
                  (funOf_isScottContinuous_left x)))
            id_isScottContinuous id_isScottContinuous)
  have heq : (fun a => arrowR a a) = (fun a =>
    graph (fun u => graph (fun x => funOf a (funOf u (funOf a x))))) := by
    funext a
    apply congrArg graph
    funext u
    change graph (fun x => funOf a (funOf (comp u a) x)) =
      graph (fun x => funOf a (funOf u (funOf a x)))
    apply congrArg graph
    funext x
    rw [comp_app]
  rw [heq]
  exact graph_const_isScottContinuous
    (fun a u => graph (fun x => funOf a (funOf u (funOf a x))))
    hbody

theorem selfArrowStep_isScottContinuous :
  IsScottContinuous selfArrowStep := by
  intro a
  have h := arrowR_diag_isScottContinuous a
  ext k
  constructor
  * intro hk
    rcases hk with hk | hk
    * exact mem_scottUnion.mpr <0, by simp [e_zero], Or.inl hk>
    * have : k in scottUnion (fun a => arrowR a a) a := by rwa [ <- h ]
      obtain <n, hn, hkn> := mem_scottUnion.mp this
      exact mem_scottUnion.mpr <n, hn, Or.inr hkn>
  * intro hk
    obtain <n, hn, hkn> := mem_scottUnion.mp hk
    rcases hkn with hkn | hkn

```

```

    * exact Or.inl hkn
    * exact Or.inr (isScottContinuous_monotone arrowR_diag_isScottContinuous hn hkn)

/-- **Scott 1976, (5.25).** Least solution of  $d = I \cup (d \text{ comp } \rightarrow d)$ . -/
def dEq : Pomega := fix selfArrowStep

/-- **Scott 1976, (5.25).**  $d = I \cup (d \text{ comp } \rightarrow d)$ . -/
theorem eq_5_25 : dEq = Icomb  $\cup$  arrowR dEq dEq :=
  (theorem_1_4 selfArrowStep_isScottContinuous).1.symm

theorem eq_5_25_arrow (hI : Icomb subseteq arrowR dEq dEq) :
  dEq = arrowR dEq dEq := by
  apply subset_antisymm
  * nth_rw 1 [eq_5_25]
    exact Set.union_subset hI subset_rfl
  * nth_rw 3 [eq_5_25]
    exact Set.subset_union_right

/-- **Scott 1976, (5.3).** The modified boolean closure. -/
def boool : Pomega :=
  graph (fun u => condSet u (ofNat 0) (succSet topElem))

theorem boool_map_isScottContinuous :
  IsScottContinuous (fun u => condSet u (ofNat 0) (succSet topElem)) :=
  condSet_isScottContinuous_left (ofNat 0) (succSet topElem)

theorem boool_app (u : Pomega) :
  funOf boool u = condSet u (ofNat 0) (succSet topElem) :=
  beta boool_map_isScottContinuous u

theorem boool_expansive (u : Pomega) :
  u subseteq condSet u (ofNat 0) (succSet topElem) := by
  intro k hk
  cases k with
  | zero => exact Or.inl <rfl, hk>
  | succ k => exact Or.inr <<k, Set.mem_univ k, rfl>, <k, hk>>

theorem boool_idem (u : Pomega) :
  condSet (condSet u (ofNat 0) (succSet topElem)) (ofNat 0) (succSet topElem) =
  condSet u (ofNat 0) (succSet topElem) := by
  by_cases h0 : 0 in u
  * by_cases hp : exists k, k + 1 in u
    * have hcu : condSet u (ofNat 0) (succSet topElem) = topElem := by
      ext n
      constructor
      * intro _; exact Set.mem_univ n
      * intro _
        cases n with
        | zero => exact Or.inl <rfl, h0>
        | succ n => exact Or.inr <<n, Set.mem_univ n, rfl>, hp>
      rw [hcu]
      ext n
      constructor
      * intro _; exact Set.mem_univ n
      * intro _
        cases n with
        | zero => exact Or.inl <rfl, Set.mem_univ 0>
        | succ n =>
          exact Or.inr <<n, Set.mem_univ n, rfl>, <0, Set.mem_univ 1>>
    * have hcu : condSet u (ofNat 0) (succSet topElem) = ofNat 0 := by
      ext n
      constructor
      * intro hn

```

```

    rcases hn with <hn, _> | <_, ht>
    * exact hn
    * exact (hp ht).elim
    * intro hn
    exact Or.inl <hn, h0>
rw [hcu]
ext n
constructor
* intro hn
  rcases hn with <hn, _> | <_, <k, hk>>
  * exact hn
  * simp [ofNat] at hk
* intro hn
  exact Or.inl <hn, rfl>
* by_cases hp : exists k, k + 1 in u
  * have hcu : condSet u (ofNat 0) (succSet topElem) = succSet topElem := by
    ext n
    constructor
    * intro hn
      rcases hn with <_, hz> | <hy, _>
      * exact (h0 hz).elim
      * exact hy
    * intro hy
      exact Or.inr <hy, hp>
  rw [hcu]
  have h0' : 0 notin succSet topElem := by
    intro <n, _, hn>
    omega
  have hp' : exists k, k + 1 in succSet topElem :=
    <0, <0, Set.mem_univ 0, rfl>>
  ext n
  constructor
  * intro hn
    rcases hn with <_, hz> | <hy, _>
    * exact (h0' hz).elim
    * exact hy
  * intro hy
    exact Or.inr <hy, hp'>
  * have hcu : condSet u (ofNat 0) (succSet topElem) = botElem := by
    ext n
    constructor
    * intro hn
      rcases hn with <_, hz> | <_, ht>
      * exact (h0 hz).elim
      * exact (hp ht).elim
    * intro hn
      simp [botElem] at hn
  rw [hcu]
  ext n
  simp [condSet, botElem]

theorem Icomb_subset_boool : Icomb subseq boool := by
  intro p hp
  rcases hp with <n, m, rfl, hm>
  exact <n, m, rfl, boool_expansive (e n) hm>

theorem boool_isRetract : IsRetract boool := by
  apply graph_ext
  intro u
  rw [boool_app, boool_app, boool_idem]

/-- **Scott 1976, (5.3).** `boool` is a closure. -/
theorem boool_isClosure : IsClosure boool :=

```

```

<Icomb_subset_bool, bool_isRetract>

theorem openR_map_isScottContinuous :
  IsScottContinuous (fun u => {m | exists n, e n subseq e m /\ n in u}) := by
  intro u
  ext m
  constructor
  * intro <n, hn, hnu>
    exact mem_scottUnion.mpr <2 ^ n, by simp [e_pow2, Set.singleton_subset_iff, hnu],
      <n, hn, by simp [e_pow2]>>
  * intro hm
    obtain <k, hk, n, hn, hnk> := mem_scottUnion.mp hm
    exact <n, hn, hk hnk>

theorem openR_app (u : Pomega) :
  funOf openR u = {m | exists n, e n subseq e m /\ n in u} :=
  beta openR_map_isScottContinuous u

theorem openR_expansive (u : Pomega) : u subseq funOf openR u := by
  intro k hk
  rw [openR_app]
  exact <k, subset_refl, hk>

theorem openR_idem (u : Pomega) :
  funOf openR (funOf openR u) = funOf openR u := by
  apply subset_antisymm
  * intro m hm
    rw [openR_app] at hm |-
    obtain <n, hn, hnu> := hm
    rw [openR_app] at hnu
    obtain <k, hk, hku> := hnu
    exact <k, subset_trans hk hn, hku>
  * exact openR_expansive (funOf openR u)

theorem openR_isRetract : IsRetract openR := by
  change openR = graph (fun x => funOf openR (funOf openR x))
  apply graph_ext
  intro u
  rw [← openR_app]
  exact (openR_idem u).symm

theorem Icomb_subset_openR : Icomb subseq openR :=
  Icomb_subset_graph.mpr fun n => by
  rw [← openR_app]
  exact openR_expansive (e n)

/-- **Scott 1976, (4.6) / S5.** `open` is a closure. -/
theorem openR_isClosure : IsClosure openR :=
  <Icomb_subset_openR, openR_isRetract>

end Scott1976.DataTypesAsLattices

```

A.13 Scott1976/DataTypesAsLattices/Classification.lean

1864 lines.

Lean 4 source (lines 1–400)

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/

```

```

import Scott1976.DataTypesAsLattices.Retracts
import Mathlib.Data.Set.Finite.Powerset

/-!
# Scott 1976, S6 -- classification of subsets of  $P?$ 

Theorems 6.1-6.7 and Table 3, following the paper's typical-set forms.
-/

namespace Scott1976.DataTypesAsLattices

open TopologicalSpace

/-- Characteristic-style map used in Theorem 6.1:  $0$  in  $f(x)$  iff some
finite piece of  $x$  already lies in  $U$ . -/
def charOpen (U : Set Pomega) (x : Pomega) : Pomega :=
  {k | k = 0 /\ exists n, e n subseq x /\ e n in U}

theorem charOpen_isScottContinuous (U : Set Pomega) :
  IsScottContinuous (charOpen U) := by
  intro x
  ext k
  constructor
  * intro <hk0, n, hn, hne>
    exact mem_scottUnion.mpr <n, hn, hk0, n, subset_refl, hne>
  * intro hk
    obtain <m, hm, hk0, n, hn, hne> := mem_scottUnion.mp hk
    exact <hk0, n, subset_trans hn hm, hne>

/-- **Scott 1976, Theorem 6.1 (The ? theorem).** -/
theorem theorem_6_1 :
  (forall f : Pomega -> Pomega, IsScottContinuous f ->
    IsScottOpen {x | 0 in f x}) /\
  (forall U, IsScottOpen U ->
    exists f, IsScottContinuous f /\ U = {x | 0 in f x}) := by
  constructor
  * intro f hf
    refine <{n | 0 in f (e n)}, ?_>
    ext x
    constructor
    * intro hx
      have : 0 in scottUnion f x := by rwa [ <- hf x ]
      obtain <n, hn, h0> := mem_scottUnion.mp this
      exact Set.mem_iUnion_2.mpr <n, h0, hn>
    * intro hx
      obtain <n, h0, hn> := Set.mem_iUnion_2.mp hx
      exact isScottContinuous_monotone hf hn h0
  * intro U hU
    refine <charOpen U, charOpen_isScottContinuous U, ?_>
    ext x
    constructor
    * intro hx
      obtain <B, rfl> := hU
      obtain <n, hn, hxn> := Set.mem_iUnion_2.mp hx
      refine <rfl, n, hxn, ?_>
      exact Set.mem_iUnion_2.mpr <n, hn, (subset_refl : e n subseq e n)>
    * intro <_, n, hn, hne>
      exact isScottOpen_isUpper hU hne hn

def ScottG : Set (Set Pomega) := {U | IsScottOpen U}
def ScottF : Set (Set Pomega) := {U | IsScottOpen U?}

inductive IsBooleanOpen : Set Pomega -> Prop

```



```

| ofOpen {U} : IsScottOpen U -> IsBooleanOpen U
| union {U V} : IsBooleanOpen U -> IsBooleanOpen V -> IsBooleanOpen (U U V)
| inter {U V} : IsBooleanOpen U -> IsBooleanOpen V -> IsBooleanOpen (U I V)
| compl {U} : IsBooleanOpen U -> IsBooleanOpen U?

def ScottB : Set (Set Pomega) := {U | IsBooleanOpen U}

def IsScottGdelta (U : Set Pomega) : Prop :=
  exists Us : Nat -> Set Pomega, (forall n, IsScottOpen (Us n)) /\ U = ? n, Us n

def IsFcapG (U : Set Pomega) : Prop :=
  exists C 0, IsScottOpen C? /\ IsScottOpen 0 /\ U = C I 0

def IsFcapGdelta (U : Set Pomega) : Prop :=
  exists C G, IsScottOpen C? /\ IsScottGdelta G /\ U = C I G

def IsBdelta (U : Set Pomega) : Prop :=
  exists Bs : Nat -> Set Pomega, (forall n, IsBooleanOpen (Bs n)) /\ U = ? n, Bs n

theorem isScottOpen_univ : IsScottOpen (Set.univ : Set Pomega) :=
  (isScottOpen_iff_isOpen _).mpr isOpen_univ

theorem isScottOpen_empty : IsScottOpen ({ } : Set Pomega) :=
  (isScottOpen_iff_isOpen _).mpr isOpen_empty

theorem isScottOpen_union {U V : Set Pomega} (hU : IsScottOpen U) (hV : IsScottOpen V) :
  IsScottOpen (U U V) :=
  (isScottOpen_iff_isOpen _).mpr
  (((isScottOpen_iff_isOpen _).mp hU).union ((isScottOpen_iff_isOpen _).mp hV))

theorem isScottOpen_inter {U V : Set Pomega} (hU : IsScottOpen U) (hV : IsScottOpen V) :
  IsScottOpen (U I V) :=
  (isScottOpen_iff_isOpen _).mpr
  (((isScottOpen_iff_isOpen _).mp hU).inter ((isScottOpen_iff_isOpen _).mp hV))

theorem isScottOpen_iUnion {? : Type*} (U : ? -> Set Pomega) (hU : forall i, IsScottOpen (U i)) :
  IsScottOpen (? i, U i) :=
  (isScottOpen_iff_isOpen _).mpr (isOpen_iUnion fun i => (isScottOpen_iff_isOpen _).mp (hU i))

theorem mem_preimage_isScottOpen {f : Pomega -> Pomega} (hf : IsScottContinuous f) (k : Nat) :
  IsScottOpen {x | k in f x} := by
  have : {x | k in f x} = f ^-1' memOpen k := rfl
  rw [this, isScottOpen_iff_isOpen]
  exact IsOpen.preimage ((isScottContinuous_iff_continuous f).mp hf) (isOpen_memOpen k)

theorem mem_isScottOpen_iff {U : Set Pomega} (hU : IsScottOpen U) {x : Pomega} :
  x in U <-> exists n, e n subseq x /\ e n in U := by
  constructor
  * intro hx
    obtain <B, rfl> := hU
    obtain <n, hn, hxn> := Set.mem_iUnion_2.mp hx
    exact <n, hxn, Set.mem_iUnion_2.mpr <n, hn, (subset_rfl : e n subseq e n)>>
  * intro <n, hn, hne>
    exact isScottOpen_isUpper hU hne hn

def charTop (U : Set Pomega) (x : Pomega) : Pomega :=
  {_k | exists n, e n subseq x /\ e n in U}

theorem charTop_isScottContinuous (U : Set Pomega) :
  IsScottContinuous (charTop U) := by
  intro x

```

```

ext k
constructor
* intro <n, hn, hne>
  exact mem_scottUnion.mpr <n, hn, n, subset_rfl, hne>
* intro hk
  obtain <m, hm, n, hn, hne> := mem_scottUnion.mp hk
  exact <n, subset_trans hn hm, hne>

theorem charTop_eq_top {U : Set Pomega} (hU : IsScottOpen U) (x : Pomega) :
  charTop U x = topElem <-> x in U := by
  constructor
  * intro h
    have : 0 in charTop U x := by rw [h]; exact Set.mem_univ 0
    obtain <n, hn, hne> := this
    exact isScottOpen_isUpper hU hne hn
  * intro hx
    ext k
    constructor
    * intro _; trivial
    * intro _
      exact (mem_isScottOpen_iff hU).mp hx

theorem charTop_eq_bot {U : Set Pomega} (hU : IsScottOpen U) (x : Pomega) :
  charTop U x = botElem <-> x notin U := by
  constructor
  * intro h hx
    have : charTop U x = topElem := (charTop_eq_top hU x).mpr hx
    rw [h] at this
    have : (0 : Nat) in (botElem : Pomega) := by
      rw [this]; exact Set.mem_univ 0
    exact (mem_botElem 0).mp this
  * intro hx
    ext k
    constructor
    * intro <n, hn, hne>
      exact hx (isScottOpen_isUpper hU hne hn)
    * intro hk
      exact ((mem_botElem k).mp hk).elim

theorem charTop_eq_bot_of_closed {C : Set Pomega} (hC : IsScottOpen C?) (x : Pomega) :
  charTop C? x = botElem <-> x in C := by
  rw [charTop_eq_bot hC]
  simp

/-- **Scott 1976, Theorem 6.2 (The ? theorem).** -/
theorem theorem_6_2 :
  forall U, U in ScottF <-> exists f, IsScottContinuous f /\ U = {x | f x = botElem}
  := by
  intro U
  constructor
  * intro hU
    refine <charTop U?, charTop_isScottContinuous U?, ?_>
    ext x
    exact (charTop_eq_bot_of_closed hU x).symm
  * rintro <f, hf, rfl>
    change IsScottOpen {x | f x = botElem}?
    have : {x | f x = botElem}? = ? k, {x | k in f x} := by
      ext x
      constructor
      * intro hx
        have hx' : f x != botElem := hx
        have : exists k, k in f x := by
          by_contra hnone

```

```

    apply hx'
  ext n
  constructor
  * intro hn
    exact (hnone <n, hn>).elim
  * intro hn
    exact ((mem_botElem n).mp hn).elim
  exact Set.mem_iUnion.mpr this
* intro hx hbot
  obtain <k, hk> := Set.mem_iUnion.mp hx
  have hk' : k in f x := hk
  have hbot' : f x = botElem := hbot
  rw [hbot'] at hk'
  exact ((mem_botElem k).mp hk').elim
rw [this]
exact isScottOpen_iUnion _ fun k => mem_preimage_isScottOpen hf k

def pairIndexed (fs : Nat -> Pomega -> Pomega) (x : Pomega) : Pomega :=
  {k | exists n m, k = pair n m /\ m in fs n x}

theorem pairIndexed_isScottContinuous (fs : Nat -> Pomega -> Pomega)
  (hfs : forall n, IsScottContinuous (fs n)) :
  IsScottContinuous (pairIndexed fs) := by
  intro x
  ext k
  constructor
  * intro <n, m, hk, hm>
    have : m in scottUnion (fs n) x := by rw [ <- hfs n x ]; exact hm
    obtain <p, hp, hmp> := mem_scottUnion.mp this
    exact mem_scottUnion.mpr <p, hp, n, m, hk, hmp>
  * intro hk
    obtain <p, hp, n, m, hk, hm> := mem_scottUnion.mp hk
    exact <n, m, hk, isScottContinuous_monotone (hfs n) hp hm>

theorem pairIndexed_eq_top (fs : Nat -> Pomega -> Pomega) (x : Pomega) :
  pairIndexed fs x = topElem <-> forall n, fs n x = topElem := by
  constructor
  * intro h n
    ext m
    constructor
    * intro _; trivial
    * intro _
      have : pair n m in pairIndexed fs x := by rw [h]; exact Set.mem_univ _
      obtain <n', m', heq, hm> := this
      obtain <rfl, rfl> := pair_inj heq
      exact hm
  * intro h
    ext k
    constructor
    * intro _; trivial
    * intro _
      obtain <n, m, hk> := exists_pair k
      exact <n, m, hk.symm, by rw [h n]; exact Set.mem_univ m>

/-- **Scott 1976, Theorem 6.3 (The  $\omega$ - $\omega$  theorem).** -/
theorem theorem_6_3 :
  forall U, IsScottGdelta U <-> exists f, IsScottContinuous f /\ U = {x | f x = topElem}
  := by
  intro U
  constructor
  * rintro <Us, hUs, rfl>
    let fs := fun n => charTop (Us n)
    refine <pairIndexed fs, pairIndexed_isScottContinuous fs fun n =>

```

```

    charTop_isScottContinuous (Us n), ?_>
  ext x
  constructor
  * intro hx
    change pairIndexed fs x = topElem
    exact (pairIndexed_eq_top fs x).mpr fun n =>
      (charTop_eq_top (hUs n) x).mpr (Set.mem_iInter.mp hx n)
  * intro hf
    have hf' : pairIndexed fs x = topElem := hf
    exact Set.mem_iInter.mpr fun n =>
      (charTop_eq_top (hUs n) x).mp ((pairIndexed_eq_top fs x).mp hf' n)
* rintro <f, hf, rfl>
  refine <fun n => {x | n in f x}, fun n => mem_preimage_isScottOpen hf n, ?_>
  ext x
  constructor
  * intro hx
    refine Set.mem_iInter.mpr fun n => ?_
    have : f x = topElem := hx
    simp [this]
  * intro hx
    ext k
    constructor
    * intro _; trivial
    * intro _
      exact Set.mem_iInter.mp hx k

def oddEvenPack (f g : Pomega -> Pomega) (x : Pomega) : Pomega :=
  {k | (exists n, k = 2 * n + 1 /\ n in f x) /\ (exists n, k = 2 * n /\ n in g x)}

theorem oddEvenPack_isScottContinuous {f g : Pomega -> Pomega}
  (hf : IsScottContinuous f) (hg : IsScottContinuous g) :
  IsScottContinuous (oddEvenPack f g) := by
  intro x
  ext k
  constructor
  * intro hk
    rcases hk with <n, hk, hn> | <n, hk, hn>
    * have : n in scottUnion f x := by rw [← hf x]; exact hn
      obtain <p, hp, hnp> := mem_scottUnion.mp this
      exact mem_scottUnion.mpr <p, hp, Or.inl <n, hk, hnp>>
    * have : n in scottUnion g x := by rw [← hg x]; exact hn
      obtain <p, hp, hnp> := mem_scottUnion.mp this
      exact mem_scottUnion.mpr <p, hp, Or.inr <n, hk, hnp>>
  * intro hk
    obtain <p, hp, h> := mem_scottUnion.mp hk
    rcases h with <n, hk, hn> | <n, hk, hn>
    * exact Or.inl <n, hk, isScottContinuous_monotone hf hp hn>
    * exact Or.inr <n, hk, isScottContinuous_monotone hg hp hn>

theorem oddEvenPack_eq_zero {f g : Pomega -> Pomega} (x : Pomega) :
  oddEvenPack f g x = ofNat 0 <-> f x = botElem /\ g x = ofNat 0 := by
  constructor
  * intro h
    constructor
    * ext n
      constructor
      * intro hn
        have : 2 * n + 1 in oddEvenPack f g x := Or.inl <n, rfl, hn>
        rw [h] at this
        simp [ofNat] at this
      * intro hn
        exact ((mem_botElem n).mp hn).elim
    * ext n

```

```

constructor
* intro hn
  have hmem : 2 * n in oddEvenPack f g x := Or.inr <n, rfl, hn>
  rw [h] at hmem
  have : 2 * n = 0 := by simpa [ofNat] using hmem
  have hn0 : n = 0 := by
    have := Nat.mul_eq_zero.mp this
    exact this.resolve_left (by decide)
  simpa [ofNat] using hn0
* intro hn
  simp [ofNat] at hn
  subst hn
  have : (0 : Nat) in oddEvenPack f g x := by rw [h]; simp [ofNat]
  rcases this with <n, hk, _> | <n, hk, hn>
  * omega
  * have : n = 0 := by omega
    simpa [this] using hn
* intro <hf, hg>
ext k
constructor
* intro hk
  rcases hk with <n, hk, hn> | <n, hk, hn>
  * rw [hf] at hn; exact ((mem_botElem n).mp hn).elim
  * rw [hg] at hn; simp [ofNat] at hn; simp [ofNat, hk, hn]
* intro hk
  simp [ofNat] at hk
  subst hk
  refine Or.inr <0, rfl, ?_>
  rw [hg]; simp [ofNat]

/-- **Scott 1976, Theorem 6.4 (The ? I ? theorem).** -/
theorem theorem_6_4 :
  forall U, IsFcapG U <-> exists f, IsScottContinuous f /\ U = {x | f x = ofNat 0} :=
  by
    intro U
    constructor
    * rintro <C, 0, hC, h0, rfl>
      refine <oddEvenPack (charTop C?) (charOpen 0),
        oddEvenPack_isScottContinuous (charTop_isScottContinuous C?)
          (charOpen_isScottContinuous 0), ?_>
    ext x
    constructor
    * intro hx
      change oddEvenPack (charTop C?) (charOpen 0) x = ofNat 0
      refine (oddEvenPack_eq_zero x).mpr ?_
      have hx' : x in C /\ x in 0 := hx
      constructor
      * exact (charTop_eq_bot_of_closed hC x).mpr hx'.1
      * ext k
        constructor
        * intro <hk0, n, hn, hne>
          simp [ofNat, hk0]
        * intro hk
          simp [ofNat] at hk
          subst hk
          obtain <n, hn, hne> := (mem_isScottOpen_iff h0).mp hx'.2
          exact <rfl, n, hn, hne>
    * intro hf
      have hf' := (oddEvenPack_eq_zero (f := charTop C?) (g := charOpen 0) x).mp hf
      constructor
      * exact (charTop_eq_bot_of_closed hC x).mp hf'.1
      * have : 0 in charOpen 0 x := by rw [hf'.2]; simp [ofNat]
        obtain <_, n, hn, hne> := this

```

```

    exact isScottOpen_isUpper h0 hne hn
* rintro <f, hf, rfl>
refine <{x | f x subseq ofNat 0}, {x | 0 in f x}, ?_, mem_preimage_isScottOpen hf 0,
?_>
* have : {x | f x subseq ofNat 0}? = ? k : Nat, {x | k != 0 /\ k in f x} := by
  ext x
  constructor
* intro hx
  have : not f x subseq ofNat 0 := hx
  obtain <k, hk, hk0> := Set.not_subset.mp this
  refine Set.mem_iUnion.mpr <k, ?_>
  simp [ofNat] at hk0
  exact <hk0, hk>
* intro hx
  obtain <k, hk0, hk> := Set.mem_iUnion.mp hx
  intro hsub
  exact hk0 (hsub hk)
rw [this]
exact isScottOpen_iUnion _ fun k => by
  by_cases hk0 : k = 0
  * subst hk0
    have : {x | (0 : Nat) != 0 /\ 0 in f x} = ({f} : Set Pomega) := by
      ext x; simp

```

Lean 4 source (lines 401–800)

```

    rw [this]; exact isScottOpen_empty
  * have : {x | k != 0 /\ k in f x} = {x | k in f x} := by
    ext x; simp [hk0]
  rw [this]; exact mem_preimage_isScottOpen hf k
* ext x
  constructor
* intro hx
  change f x subseq ofNat 0 /\ 0 in f x
  have hx' : f x = ofNat 0 := hx
  constructor
  * simp [hx']
  * simp [hx', ofNat]
* intro hx
  change f x = ofNat 0
  ext n
  simp [ofNat]
  constructor
  * intro hn; exact hx.1 hn
  * intro hn; simp [hn] using hx.2

def fcapGdeltaPack (f g : Pomega -> Pomega) (x : Pomega) : Pomega :=
  {k | (k = 0 /\ 0 in f x) \/ exists n, k = n + 1 /\ n in g x}

theorem fcapGdeltaPack_isScottContinuous {f g : Pomega -> Pomega}
  (hf : IsScottContinuous f) (hg : IsScottContinuous g) :
  IsScottContinuous (fcapGdeltaPack f g) := by
  intro x
  ext k
  constructor
* intro hk
  rcases hk with <hk0, h0> | <n, hk, hn>
  * have : 0 in scottUnion f x := by rw [← hf x]; exact h0
    obtain <p, hp, hp0> := mem_scottUnion.mp this
    exact mem_scottUnion.mpr <p, hp, 0r.inl <hk0, hp0>>
  * have : n in scottUnion g x := by rw [← hg x]; exact hn
    obtain <p, hp, hnp> := mem_scottUnion.mp this
    exact mem_scottUnion.mpr <p, hp, 0r.inr <n, hk, hnp>>
* intro hk

```

```

    obtain <p, hp, h> := mem_scottUnion.mp hk
    rcases h with <hk0, h0> | <n, hk, hn>
    * exact Or.inl <hk0, isScottContinuous_monotone hf hp h0>
    * exact Or.inr <n, hk, isScottContinuous_monotone hg hp hn>

theorem zero_not_mem_succSet_top : 0 notin succSet topElem := by
  intro h
  obtain <n, _, hn> := h
  exact Nat.succ_ne_zero n hn.symm

theorem fcapGdeltaPack_eq {f g : Pomega -> Pomega} {x : Pomega}
  (hfval : f x = botElem \ / f x = topElem) :
  fcapGdeltaPack f g x = succSet topElem <-> f x = botElem \ / g x = topElem := by
  constructor
  * intro h
  constructor
  * have h0 : 0 notin fcapGdeltaPack f g x := by
    rw [h]; exact zero_not_mem_succSet_top
  have : 0 notin f x := fun hf0 => h0 (Or.inl <rfl, hf0>)
  rcases hfval with hf | hf
  * exact hf
  * exact (this (by rw [hf]; exact Set.mem_univ 0)).elim
  * ext n
  constructor
  * intro _; trivial
  * intro _
  have : n + 1 in fcapGdeltaPack f g x := by
    rw [h]; exact <n, Set.mem_univ n, rfl>
  rcases this with <hk0, _> | <m, hm, hmn>
  * exact (Nat.succ_ne_zero n (by simp [hk0])).elim
  * exact Nat.succ_injective hm |> hmn
  * intro <hf, hg>
  ext k
  constructor
  * intro hk
  rcases hk with <_, h0> | <n, hk, hn>
  * rw [hf] at h0; exact ((mem_botElem 0).mp h0).elim
  * exact <n, Set.mem_univ n, hk>
  * intro hk
  obtain <n, _, rfl> := hk
  refine Or.inr <n, rfl, ?_>
  rw [hg]; exact Set.mem_univ n

/-- **Scott 1976, Theorem 6.5 (The  $\omega$ -I  $\omega$ -? theorem).** -/
theorem theorem_6_5 :
  forall U, IsFcapGdelta U <->
    exists f, IsScottContinuous f \ / U = {x | f x = succSet topElem} := by
  intro U
  constructor
  * rintro <C, G, hC, hG, rfl>
  obtain <fG, hfG, rflG> := (theorem_6_3 G).mp hG
  refine <fcapGdeltaPack (charTop C?) fG,
    fcapGdeltaPack_isScottContinuous (charTop_isScottContinuous C?) hfG, ?_>
  ext x
  have hfval : charTop C? x = botElem \ / charTop C? x = topElem := by
    by_cases hx : x in C
    * exact Or.inl ((charTop_eq_bot_of_closed hC x).mpr hx)
    * exact Or.inr ((charTop_eq_top hC x).mpr hx)
  constructor
  * intro <hxG, hxG>
  have hf : charTop C? x = botElem := (charTop_eq_bot_of_closed hC x).mpr hxG
  have hg : fG x = topElem := by rw [rflG] at hxG; exact hxG
  exact (fcapGdeltaPack_eq hfval).mpr <hf, hg>

```

```

* intro hpack
  obtain <hf, hg> := (fcapGdeltaPack_eq hfval).mp hpack
  exact <(charTop_eq_bot_of_closed hC x).mp hf, by rw [rflG]; exact hg>
* rintro <f, hf, rfl>
  refine <{x | f x subseq succSet topElem}, {x | succSet topElem subseq f x}, ?_, ?_,
  ?_>
* have : {x | f x subseq succSet topElem}? = {x | 0 in f x} := by
  ext x
  constructor
  * intro hx
    obtain <k, hk, hknotin> := Set.not_subset.mp hx
    have hk0 : k = 0 := by
      by_contra hne
      exact hknotin <k - 1, Set.mem_univ _, (Nat.succ_pred_eq_of_ne_zero hne).symm>
    simp [hk0] using hk
  * intro h0 hsub
    exact zero_not_mem_succSet_top (hsub h0)
  rw [this]
  exact mem_preimage_isScottOpen hf 0
* refine <fun n => {x | n + 1 in f x}, fun n => mem_preimage_isScottOpen hf (n + 1), ?_>
  ext x
  constructor
  * intro hx
    exact Set.mem_iInter.mpr fun n => hx <n, Set.mem_univ n, rfl>
  * intro hx k hk
    obtain <n, _, rfl> := hk
    exact Set.mem_iInter.mp hx n
* ext x
  constructor
  * intro hx
    change f x subseq succSet topElem /\ succSet topElem subseq f x
    have hx' : f x = succSet topElem := hx
    constructor <;> simp [hx']
  * intro hx
    change f x = succSet topElem
    exact subset_antisymm hx.1 hx.2

def evenPart (y : Pomega) : Pomega := {n | 2 * n in y}
def oddPart (y : Pomega) : Pomega := {n | 2 * n + 1 in y}

theorem evenPart_oddEven (f g : Pomega -> Pomega) (x : Pomega) :
  evenPart (oddEvenPack f g x) = g x := by
  ext n
  constructor
  * intro hn
    rcases hn with <k, hk, hkn> | <k, hk, hkn>
    * have : 2 * n = 2 * k + 1 := hk
      omega
    * have : k = n := by
      have : 2 * n = 2 * k := hk
      omega
    simp [this] using hkn
  * intro hn
    exact Or.inr <n, rfl, hn>

theorem oddPart_oddEven (f g : Pomega -> Pomega) (x : Pomega) :
  oddPart (oddEvenPack f g x) = f x := by
  ext n
  constructor
  * intro hn
    rcases hn with <k, hk, hkn> | <k, hk, hkn>
    * have : k = n := by
      have : 2 * n + 1 = 2 * k + 1 := hk

```



```

      omega
      simp [this] using hkn
      * have : 2 * n + 1 = 2 * k := hk
      omega
      * intro hn
      exact Or.inl <n, rfl, hn>

theorem oddEvenPack_subset {f g : Pomega -> Pomega} {x : Pomega} {N M : Nat}
  (hf : f x subseq {m | m < N}) (hg : g x subseq {m | m < M}) :
  oddEvenPack f g x subseq {k | k < 2 * Nat.max N M + 1} := by
  intro k hk
  rcases hk with <n, rfl, hn> | <n, rfl, hn>
  * have hnN : n < N := hf hn
  have : n < Nat.max N M := lt_of_lt_of_le hnN (Nat.le_max_left _ _)
  exact Nat.succ_lt_succ (Nat.mul_lt_mul_of_pos_left this (by decide : 0 < 2))
  * have hnM : n < M := hg hn
  have hlt : n < Nat.max N M := lt_of_lt_of_le hnM (Nat.le_max_right _ _)
  have : 2 * n < 2 * Nat.max N M + 1 :=
    Nat.lt_succ_of_le (Nat.mul_le_mul_left 2 (Nat.le_of_lt hlt))
  exact this

theorem finite_Iio_nat (N : Nat) : ({m : Nat | m < N}).Finite :=
  Set.Finite.ofFinset (Finset.range N) fun x => by simp

theorem finite_subsets_lt (N : Nat) :
  ({y : Pomega | y subseq {m | m < N}}).Finite :=
  (finite_Iio_nat N).finite_subsets

theorem isBooleanOpen_of_closed {U : Set Pomega} (hU : IsScottOpen U?) :
  IsBooleanOpen U := by
  have h := (IsBooleanOpen.ofOpen hU).compl
  rwa [compl_compl] at h

theorem isBooleanOpen_of_fcpg {U : Set Pomega} (hU : IsFcapG U) : IsBooleanOpen U := by
  obtain <C, 0, hC, h0, rfl> := hU
  exact (isBooleanOpen_of_closed hC).inter (IsBooleanOpen.ofOpen h0)

theorem isBooleanOpen_sUnion_finite {S : Set (Set Pomega)}
  (hS : S.Finite) (hU : forall U in S, IsBooleanOpen U) :
  IsBooleanOpen (?_0 S) := by
  revert hU
  induction S, hS using Set.Finite.induction_on with
  | empty =>
    intro
    simp
    exact IsBooleanOpen.ofOpen isScottOpen_empty
  | insert ha hs ih =>
    intro hUV
    rename_i a s
    simp [Set.sUnion_insert]
    exact (hUV a (Set.mem_insert a s)).union
      (ih fun u hu => hUV u (Set.mem_insert_of_mem a hu))

/-- Witness used in the inductive proof of Theorem 6.6. -/
def BooleanMemE (U : Set Pomega) : Prop :=
  exists (f : Pomega -> Pomega) (N : Nat) (E : Set Pomega),
    IsScottContinuous f /\
    (forall x, f x subseq {m | m < N}) /\
    E.Finite /\ (forall e in E, e subseq {m | m < N}) /\
    U = {x | f x in E}

theorem booleanMemE_ofOpen {U : Set Pomega} (hU : IsScottOpen U) :
  BooleanMemE U := by

```

```

refine <charOpen U, 1, {ofNat 0}, charOpen_isScottContinuous U, ?_, ?_, ?_, ?_>
* intro x k hk
  rcases hk with <rfl, _>
  exact Nat.zero_lt_one
* exact Set.finite_singleton _
* intro e he
  simp [ofNat] at he
  subst he
  intro k hk
  simp [ofNat] at hk
  subst hk
  exact Nat.zero_lt_one
* ext x
  constructor
* intro hx
  change charOpen U x = ofNat 0
  ext k
  constructor
* intro <hk0, n, hn, hne>
  simp [ofNat, hk0]
* intro hk
  simp [ofNat] at hk
  subst hk
  obtain <n, hn, hne> := (mem_isScottOpen_iff hU).mp hx
  exact <rfl, n, hn, hne>
* intro hx
  have : 0 in charOpen U x := by
    have : charOpen U x = ofNat 0 := hx
    rw [this]; simp [ofNat]
  obtain <_, n, hn, hne> := this
  exact isScottOpen_isUpper hU hne hn

theorem booleanMemE_union {U V : Set Pomega}
  (hU : BooleanMemE U) (hV : BooleanMemE V) : BooleanMemE (U ∪ V) := by
  obtain <f, N, E, hf, hfb, hEf, hEsub, rfl> := hU
  obtain <g, M, F, hg, hgb, hFf, hFsub, rfl> := hV
  let N' := 2 * max N M + 1
  let E' : Set Pomega :=
    {y | y ⊆ {m | m < N'} ∧ (evenPart y in F ∨ oddPart y in E)}
  refine <oddEvenPack f g, N', E',
    oddEvenPack_isScottContinuous hf hg, ?_, ?_, ?_, ?_>
* intro x
  exact oddEvenPack_subset (hfb x) (hgb x)
* have hpow := finite_subsets_lt N'
  exact hpow.subset fun y hy => hy.1
* intro y hy; exact hy.1
* ext x
  constructor
* intro hx
  refine <oddEvenPack_subset (hfb x) (hgb x), ?_>
  rw [evenPart_oddEven, oddPart_oddEven]
  rcases hx with h | h
  * exact Or.inr h
  * exact Or.inl h
* intro hx
  have hx' := hx.2
  rw [evenPart_oddEven, oddPart_oddEven] at hx'
  rcases hx' with h | h
  * exact Or.inr h
  * exact Or.inl h

theorem booleanMemE_inter {U V : Set Pomega}
  (hU : BooleanMemE U) (hV : BooleanMemE V) : BooleanMemE (U ∩ V) := by

```

```

obtain <f, N, E, hf, hfb, hEf, hEsub, rfl> := hU
obtain <g, M, F, hg, hgb, hFf, hFsub, rfl> := hV
let N' := 2 * max N M + 1
let E' : Set Pomega :=
  {y | y subseteq {m | m < N'}} /\ evenPart y in F /\ oddPart y in E}
refine <oddEvenPack f g, N', E',
  oddEvenPack_isScottContinuous hf hg, ?_, ?_, ?_, ?_>
* intro x
  exact oddEvenPack_subset (hfb x) (hgb x)
* have hpow := finite_subsets_lt N'
  exact hpow.subset fun y hy => hy.1
* intro y hy; exact hy.1
* ext x
  constructor
* intro hx
  refine <oddEvenPack_subset (hfb x) (hgb x), ?_>
  rw [evenPart_oddEven, oddPart_oddEven]
  exact <hx.2, hx.1>
* intro hx
  have : evenPart (oddEvenPack f g x) in F /\
    oddPart (oddEvenPack f g x) in E := <hx.2.1, hx.2.2>
  rw [evenPart_oddEven, oddPart_oddEven] at this
  exact <this.2, this.1>

theorem booleanMemE_compl {U : Set Pomega} (hU : BooleanMemE U) :
  BooleanMemE U? := by
  obtain <f, N, E, hf, hfb, hEf, hEsub, rfl> := hU
  let E' : Set Pomega := {y | y subseteq {m | m < N} /\ y notin E}
  refine <f, N, E', hf, hfb, ?_, fun y hy => hy.1, ?_>
  * exact (finite_subsets_lt N).subset fun y hy => hy.1
  * ext x
    constructor
  * intro hx
    exact <hfb x, hx>
  * intro hx
    exact hx.2

/-- **Scott 1976, Theorem 6.6 (The ? theorem).** -/
theorem theorem_6_6 :
  forall U, U in ScottB <->
    exists f, IsScottContinuous f /\ exists E : Set Pomega,
      E.Finite /\ (forall e in E, e.Finite) /\ U = {x | f x in E} := by
  intro U
  constructor
* intro hU
  have : BooleanMemE U := by
    induction hU with
    | ofOpen hU => exact booleanMemE_ofOpen hU
    | union _ _ ihU ihV => exact booleanMemE_union ihU ihV
    | inter _ _ ihU ihV => exact booleanMemE_inter ihU ihV
    | compl _ ih => exact booleanMemE_compl ih
  obtain <f, N, E, hf, hfb, hEf, hEsub, rfl> := this
  refine <f, hf, E, hEf, fun e he => (finite_lto_nat N).subset (hEsub e he), rfl>
* rintro <f, hf, E, hE, hEfin, rfl>
  have : {x | f x in E} = ?_0 ((fun e => {x | f x = e}) '' E) := by
    ext x
    constructor
  * intro hx
    exact <{y | f y = f x}, <f x, hx, rfl>, rfl>
  * intro hx
    obtain <_, <e, he, rfl>, hx'> := hx
    have hxeq : f x = e := hx'
    change f x in E

```

```

    rwa [hxeq]
  rw [this]
  refine isBooleanOpen_sUnion_finite (hE.image _) fun W hW => ?_
  obtain <e, heE, rfl> := hW
  have hefin : e.Finite := hEfin e heE
  have hopen : IsScottOpen {x | e ⊆ f x} := by
    have : {x | e ⊆ f x} = ? k in hefin.toFinset, {x | k in f x} := by
      ext x
      constructor
      * intro hx
        exact Set.mem_iInter_2.mpr fun k hk => hx (hefin.mem_toFinset.mp hk)
      * intro hx k hk
        exact Set.mem_iInter_2.mp hx k (hefin.mem_toFinset.mpr hk)
  rw [this, isScottOpen_iff_isOpen]
  exact isOpen_biInter_finset fun k _ =>
    (isScottOpen_iff_isOpen _).mp (mem_preimage_isScottOpen hf k)
  have hclosed : IsScottOpen {x | f x ⊆ e}? := by
    have : {x | f x ⊆ e}? = ? k, {x | k notin e /\ k in f x} := by
      ext x
      constructor
      * intro hx
        obtain <k, hk, hke> := Set.not_subset.mp hx
        exact Set.mem_iUnion.mpr <k, <hke, hk>>
      * intro hx
        obtain <k, hke, hk> := Set.mem_iUnion.mp hx
        intro hsub
        exact hke (hsub hk)
  rw [this]
  exact isScottOpen_iUnion _ fun k => by
    by_cases hke : k in e
    * have : {x | k notin e /\ k in f x} = ({ } : Set Pomega) := by
      ext x; simp [hke]
      rw [this]; exact isScottOpen_empty
    * have : {x | k notin e /\ k in f x} = {x | k in f x} := by
      ext x; simp [hke]
      rw [this]; exact mem_preimage_isScottOpen hf k
  exact isBooleanOpen_of_fcappg <{x | f x ⊆ e}, {x | e ⊆ f x}, hclosed,
  hopen, by
    ext x
    constructor
    * intro hx
      have : f x = e := by
        have : f x in ({e} : Set Pomega) := hx
        simp using this
      exact <this.subset, this.symm.subset>
    * intro hx
      have : f x = e := subset_antisymm hx.1 hx.2
      simp [this]>

```

Lean 4 source (lines 801–1200)

```

/-- **Scott 1976, Theorem 6.7, equalizer -> `B_?`.**
`{x | f x = g x} = ?_n ({n in f /\ n in g} U {n notin f /\ n notin g})`. -/
theorem theorem_6_7_of_equalizer :
  forall U, (exists f g, IsScottContinuous f /\ IsScottContinuous g /\
    U = {x | f x = g x}) -> IsBdelta U := by
  rintro U <f, g, hf, hg, rfl>
  refine <fun n => {x | n in f x /\ n in g x} U {x | n notin f x /\ n notin g x},
    ?_, ?_>
  * intro n
  refine (IsBooleanOpen.ofOpen
    (isScottOpen_inter (mem_preimage_isScottOpen hf n)
      (mem_preimage_isScottOpen hg n))).union

```

```

(isBooleanOpen_of_closed ?_)
have : {x | n notin f x /\ n notin g x}? = {x | n in f x} U {x | n in g x} :=
by
  ext x
  constructor
  * intro hx
    have : not (n notin f x /\ n notin g x) := hx
    by_cases hfx : n in f x
    * exact Or.inl hfx
    * by_cases hgx : n in g x
      * exact Or.inr hgx
      * exact (this <hfx, hgx>).elim
  * intro hx h
    rcases hx with hf' | hg'
    * exact h.1 hf'
    * exact h.2 hg'
rw [this]
exact isScottOpen_union (mem_preimage_isScottOpen hf n)
(mem_preimage_isScottOpen hg n)
* ext x
  constructor
  * intro h
    refine Set.mem_iInter.mpr fun n => ?_
    have heq : f x = g x := h
    by_cases hn : n in f x
    * exact Or.inl <hn, by rwa [ <- heq]>
    * exact Or.inr <hn, by simp [heq] using hn>
  * intro hx
    ext n
    have hn := Set.mem_iInter.mp hx n
    constructor
    * intro hfx
      rcases hn with <_, hng> | <hnf, _>
      * exact hng
      * exact (hnf hfx).elim
    * intro hgx
      rcases hn with <hnf, _> | <_, hng>
      * exact hnf
      * exact (hng hgx).elim

/-- **Scott 1976, Theorem 6.7, converse packing.**
A countable intersection of equalizers is again an equalizer, via
`pairIndexed`. -/
theorem theorem_6_7_iInter_equalizer (f g : Nat -> Pomega -> Pomega)
(hf : forall n, IsScottContinuous (f n)) (hg : forall n, IsScottContinuous (g n)) :
exists F G, IsScottContinuous F /\ IsScottContinuous G /\
{x | forall n, f n x = g n x} = {x | F x = G x} :=
<pairIndexed f, pairIndexed g,
pairIndexed_isScottContinuous f hf, pairIndexed_isScottContinuous g hg, by
ext x
  constructor
  * intro h
    ext k
    constructor
    * intro <n, m, hk, hm>
      exact <n, m, hk, by rwa [ <- h n]>
    * intro <n, m, hk, hm>
      exact <n, m, hk, by rwa [h n]>
  * intro h n
    ext m
    constructor
    * intro hm
      have : pair n m in pairIndexed g x := by

```

```

        have : pair n m in pairIndexed f x := <n, m, rfl, hm>
        rwa [h] at this
    obtain <n', m', heq, hm'> := this
    obtain <rfl, rfl> := pair_inj heq
    exact hm'
* intro hm
    have : pair n m in pairIndexed f x := by
        have : pair n m in pairIndexed g x := <n, m, rfl, hm>
        rwa [← h] at this
    obtain <n', m', heq, hm'> := this
    obtain <rfl, rfl> := pair_inj heq
    exact hm'>

/-- Every `B_?` written as a countable intersection of equalizers is itself
an equalizer of continuous maps. -/
theorem theorem_6_7_converse_of_equalizers (f g : Nat → Pomega → Pomega)
    (hf : forall n, IsScottContinuous (f n)) (hg : forall n, IsScottContinuous (g n))
    {U : Set Pomega} (hU : U = {x | forall n, f n x = g n x}) :
    exists F G, IsScottContinuous F /\ IsScottContinuous G /\ U = {x | F x = G x} := by
    obtain <F, G, hF, hG, h> := theorem_6_7_iInter_equalizer f g hf hg
    exact <F, G, hF, hG, hU.trans h>

/-- Union is Scott-continuous in the left argument. -/
theorem union_isScottContinuous_left (y : Pomega) :
    IsScottContinuous (fun x => (x U y : Pomega)) := by
    intro x
    ext k
    constructor
* intro hk
    rcases hk with h | h
    * exact mem_scottUnion.mpr <2 ^ k, by simp [e_pow2, Set.singleton_subset_iff, h],
      Or.inl (by simp [e_pow2])>
    * exact mem_scottUnion.mpr <0, by simp [e_zero], Or.inr h>
* intro hk
    obtain <n, hn, hkn> := mem_scottUnion.mp hk
    rcases hkn with h | h
    * exact Or.inl (hn h)
    * exact Or.inr h

/-- Union is Scott-continuous in the right argument. -/
theorem union_isScottContinuous_right (x : Pomega) :
    IsScottContinuous (fun y => (x U y : Pomega)) := by
    intro y
    ext k
    constructor
* intro hk
    rcases hk with h | h
    * exact mem_scottUnion.mpr <0, by simp [e_zero], Or.inl h>
    * exact mem_scottUnion.mpr <2 ^ k, by simp [e_pow2, Set.singleton_subset_iff, h],
      Or.inr (by simp [e_pow2])>
* intro hk
    obtain <n, hn, hkn> := mem_scottUnion.mp hk
    rcases hkn with h | h
    * exact Or.inl h
    * exact Or.inr (hn h)

/-- Three-valued characteristic of a Scott-closed set: `0` on `C`, `top` off `C`. -/
def closedToZero (C : Set Pomega) (x : Pomega) : Pomega :=
    ofNat 0 U charTop C? x

theorem closedToZero_isScottContinuous (C : Set Pomega) :
    IsScottContinuous (closedToZero C) :=
    theorem_1_3_tuple (f := fun a b => (a U b : Pomega))

```

```

union_isScottContinuous_left union_isScottContinuous_right
(const_isScottContinuous (ofNat 0)) (charTop_isScottContinuous C?)

/-- Scott's auxiliary value `0` used in the many-valued tables of Theorem 6.7.
The vision transcription writes `0` = 0 U False, which equals `0` and would
collapse the tables; the tables need a point distinct from `False`, `0`, and
`top`, so we take `0 U 1`. -/
def zeroPrime : Pomega := ofNat 0 U ofNat 1

/-- Scott's table `u` on `{False, 0, top}`, extended continuously to all of `P?`. -/
def uvU (x y : Pomega) : Pomega :=
  {k | (k = 0 /\ (x.Nonempty /\ y.Nonempty)) /\
    (k = 1 /\ ((0 in x /\ exists n, n + 1 in y) /\ ((exists n, n + 1 in x) /\
      0 in y)))}

/-- Scott's table `v` on `{False, 0, top}`, extended continuously to all of `P?`. -/
def uvV (x y : Pomega) : Pomega :=
  {k | k = 0 /\
    (k = 1 /\ ((exists n, n + 1 in x) /\ (exists n, n + 1 in y))) /\
    (0 in x /\ (exists n, n + 1 in x) /\ 0 in y /\ (exists n, n + 1 in y))}

def IsThreeValued (x : Pomega) : Prop :=
  x = botElem /\ x = ofNat 0 /\ x = topElem

theorem uvU_mono_left {x x' y : Pomega} (h : x subseq x') : uvU x y subseq uvU x' y :=
  by
  intro k hk
  rcases hk with <rfl, hne> | <rfl, h1>
  * exact Or.inl <rfl, hne.imp_left fun <n, hn> => <n, h hn>>
  * rcases h1 with h10 | <<n, hn>, h0>
    * exact Or.inr <rfl, Or.inl <h h10.1, h10.2>>
    * exact Or.inr <rfl, Or.inr <<n, h hn>, h0>>

theorem uvU_mono_right {x y y' : Pomega} (h : y subseq y') : uvU x y subseq uvU x y' :=
  by
  intro k hk
  rcases hk with <rfl, hne> | <rfl, h1>
  * exact Or.inl <rfl, hne.imp_right fun <n, hn> => <n, h hn>>
  * rcases h1 with <h0, <n, hn>> | h10
    * exact Or.inr <rfl, Or.inl <h0, <n, h hn>>>
    * exact Or.inr <rfl, Or.inr <h10.1, h h10.2>>

theorem uvV_mono_left {x x' y : Pomega} (h : x subseq x') : uvV x y subseq uvV x' y :=
  by
  intro k hk
  rcases hk with hk0 | <hk1, hpos> | <h0, <n, hn>, h0y, hpy>
  * exact Or.inl hk0
  * exact Or.inr (Or.inl <hk1, hpos.imp_left fun <n, hn> => <n, h hn>>)
  * exact Or.inr (Or.inr <h h0, <n, h hn>, h0y, hpy>)

theorem uvV_mono_right {x y y' : Pomega} (h : y subseq y') : uvV x y subseq uvV x y' :=
  by
  intro k hk
  rcases hk with hk0 | <hk1, hpos> | <h0, hpx, h0y, <n, hn>>
  * exact Or.inl hk0
  * exact Or.inr (Or.inl <hk1, hpos.imp_right fun <n, hn> => <n, h hn>>)
  * exact Or.inr (Or.inr <h0, hpx, h h0y, <n, h hn>>)

theorem uvU_isScottContinuous_left (y : Pomega) :
  IsScottContinuous (fun x => uvU x y) := by
  intro x
  ext k
  constructor

```

```

* intro hk
rcases hk with <rfl, hne> | <rfl, h1>
* rcases hne with <n, hn> | hy
  * exact mem_scottUnion.mpr <2 ^ n, by simp [e_pow2, Set.singleton_subset_iff, hn],
    Or.inl <rfl, Or.inl <n, by simp [e_pow2]>>>
  * exact mem_scottUnion.mpr <0, by simp [e_zero], Or.inl <rfl, Or.inr hy>>
* rcases h1 with <h0, hp> | <<n, hn>, h0>
  * exact mem_scottUnion.mpr <1, by simp [e_one, h0],
    Or.inr <rfl, Or.inl <by simp [e_one], hp>>>
  * exact mem_scottUnion.mpr <2 ^ (n + 1), by simp [e_pow2, Set.singleton_subset_iff, hn],
    Or.inr <rfl, Or.inr <<n, by simp [e_pow2]>>, h0>>>
* intro hk
obtain <m, hm, hkm> := mem_scottUnion.mp hk
exact uvU_mono_left hm hkm

theorem uvU_isScottContinuous_right (x : Pomega) :
  IsScottContinuous (fun y => uvU x y) := by
  intro y
  ext k
  constructor
  * intro hk
    rcases hk with <rfl, hne> | <rfl, h1>
    * rcases hne with hx | <n, hn>
      * exact mem_scottUnion.mpr <0, by simp [e_zero], Or.inl <rfl, Or.inl hx>>
      * exact mem_scottUnion.mpr <2 ^ n, by simp [e_pow2, Set.singleton_subset_iff, hn],
        Or.inl <rfl, Or.inr <n, by simp [e_pow2]>>>
    * rcases h1 with <h0, <n, hn>> | <hp, h0>
      * exact mem_scottUnion.mpr <2 ^ (n + 1), by simp [e_pow2, Set.singleton_subset_iff, hn],
        Or.inr <rfl, Or.inl <h0, <n, by simp [e_pow2]>>>>
      * exact mem_scottUnion.mpr <1, by simp [e_one, h0],
        Or.inr <rfl, Or.inr <hp, by simp [e_one]>>>
    * intro hk
      obtain <m, hm, hkm> := mem_scottUnion.mp hk
      exact uvU_mono_right hm hkm

theorem uvV_isScottContinuous_left (y : Pomega) :
  IsScottContinuous (fun x => uvV x y) := by
  intro x
  ext k
  constructor
  * intro hk
    rcases hk with hk0 | <rfl, hpos> | <h0, <n, hn>, h0y, hpy>
    * exact mem_scottUnion.mpr <0, by simp [e_zero], Or.inl hk0>
    * rcases hpos with <n, hn> | hy
      * exact mem_scottUnion.mpr <2 ^ (n + 1), by simp [e_pow2, Set.singleton_subset_iff, hn],
        Or.inr (Or.inl <rfl, Or.inl <n, by simp [e_pow2]>>>>
      * exact mem_scottUnion.mpr <0, by simp [e_zero],
        Or.inr (Or.inl <rfl, Or.inr hy>>>
    * refine mem_scottUnion.mpr <1 ||| 2 ^ (n + 1), e_or_of_subset
      (by simp [e_one, Set.singleton_subset_iff, h0])
      (by simp [e_pow2, Set.singleton_subset_iff, hn]), ?_>
      refine Or.inr (Or.inr <?_, <n, ?_>, h0y, hpy>)
      * simp [e_or, e_one]
      * simp [e_or, e_pow2]
    * intro hk
      obtain <m, hm, hkm> := mem_scottUnion.mp hk
      exact uvV_mono_left hm hkm

theorem uvV_isScottContinuous_right (x : Pomega) :
  IsScottContinuous (fun y => uvV x y) := by
  intro y
  ext k
  constructor

```



```

* intro hk
rcases hk with hk0 | <rfl, hpos> | <h0, hpx, h0y, <n, hn>>
* exact mem_scottUnion.mpr <0, by simp [e_zero], Or.inl hk0>
* rcases hpos with hx | <n, hn>
* exact mem_scottUnion.mpr <0, by simp [e_zero],
  Or.inr (Or.inl <rfl, Or.inl hx>>>
* exact mem_scottUnion.mpr <2 ^ (n + 1), by simp [e_pow2, Set.singleton_subset_iff, hn],
  Or.inr (Or.inl <rfl, Or.inr <n, by simp [e_pow2]>>>>
* refine mem_scottUnion.mpr <1 ||| 2 ^ (n + 1), e_or_of_subset
  (by simp [e_one, Set.singleton_subset_iff, h0y])
  (by simp [e_pow2, Set.singleton_subset_iff, hn]), ?_>
refine Or.inr (Or.inr <h0, hpx, ?_, <n, ?_>>)
* simp [e_or, e_one]
* simp [e_or, e_pow2]
* intro hk
obtain <m, hm, hkm> := mem_scottUnion.mp hk
exact uvV_mono_right hm hkm

theorem bot_ne_ofNat_zero : botElem != ofNat 0 := by
intro h
have : (0 : Nat) in botElem := by rw [h]; simp [ofNat]
exact (mem_botElem 0).mp this

theorem top_ne_ofNat_zero : topElem != ofNat 0 := by
intro h
have : (1 : Nat) in ofNat 0 := by rw [← h]; exact Set.mem_univ 1
simp [ofNat] at this

theorem zeroPrime_ne_ofNat_zero : zeroPrime != ofNat 0 := by
intro h
have : (1 : Nat) in ofNat 0 := by
  have : (1 : Nat) in zeroPrime := Or.inr rfl
  rwa [h] at this
simp [ofNat] at this

theorem zeroPrime_ne_top : zeroPrime != topElem := by
intro h
have : (2 : Nat) in zeroPrime := by rw [h]; exact Set.mem_univ 2
simp [zeroPrime, ofNat] at this

theorem uvU_bot_bot : uvU botElem botElem = botElem := by
ext k
simp [uvU, botElem]

theorem uvV_bot_bot : uvV botElem botElem = ofNat 0 := by
ext k
constructor
* intro hk
rcases hk with hk0 | <hk1, hpos> | htop
* simp [ofNat] using hk0
* rcases hpos with <n, hn> | <n, hn> <;> exact ((mem_botElem (n + 1)).mp hn).elim
* exact ((mem_botElem 0).mp htop.1).elim
* intro hk
simp [ofNat] at hk
exact Or.inl hk

theorem ofNat_zero_nonempty : (ofNat 0).Nonempty :=
<0, rfl>

theorem ofNat_zero_not_pos : not exists n, n + 1 in ofNat 0 := by
intro <n, hn>
simp [ofNat] at hn

```

```

theorem uvU_bot_zero : uvU botElem (ofNat 0) = ofNat 0 := by
  ext k
  constructor
  * intro hk
    rcases hk with <hk0, _> | <hk1, h1>
    * simp [ofNat] using hk0
    * rcases h1 with <h0, _> | <<n, hn>, _>
      * exact ((mem_botElem 0).mp h0).elim
      * exact ((mem_botElem (n + 1)).mp hn).elim
  * intro hk
    simp [ofNat] at hk
    exact Or.inl <hk, Or.inr ofNat_zero_nonempty>

```

```

theorem uvV_bot_zero : uvV botElem (ofNat 0) = ofNat 0 := by
  ext k
  constructor
  * intro hk
    rcases hk with hk0 | <hk1, hpos> | htop
    * simp [ofNat] using hk0
    * rcases hpos with <n, hn> | hp
      * exact ((mem_botElem (n + 1)).mp hn).elim
      * exact (ofNat_zero_not_pos hp).elim
    * exact ((mem_botElem 0).mp htop.1).elim
  * intro hk
    simp [ofNat] at hk
    exact Or.inl hk

```

```

theorem uvU_zero_bot : uvU (ofNat 0) botElem = ofNat 0 := by
  ext k
  constructor
  * intro hk
    rcases hk with <hk0, _> | <_, h1>
    * simp [ofNat] using hk0
    * rcases h1 with <_, <n, hn>> | <<n, hn>, _>
      * exact ((mem_botElem (n + 1)).mp hn).elim
      * exact (ofNat_zero_not_pos <n, hn>).elim
  * intro hk
    simp [ofNat] at hk
    exact Or.inl <hk, Or.inl ofNat_zero_nonempty>

```

```

theorem uvV_zero_bot : uvV (ofNat 0) botElem = ofNat 0 := by
  ext k
  constructor
  * intro hk
    rcases hk with hk0 | <_, hpos> | htop
    * simp [ofNat] using hk0
    * rcases hpos with hp | <n, hn>
      * exact (ofNat_zero_not_pos hp).elim
      * exact ((mem_botElem (n + 1)).mp hn).elim
    * exact ((mem_botElem 0).mp htop.2.2.1).elim
  * intro hk
    simp [ofNat] at hk
    exact Or.inl hk

```

```

theorem uvU_zero_zero : uvU (ofNat 0) (ofNat 0) = ofNat 0 := by
  ext k
  constructor
  * intro hk
    rcases hk with <hk0, _> | <_, h1>
    * simp [ofNat] using hk0
    * rcases h1 with <_, hp> | <hp, _>
      * exact (ofNat_zero_not_pos hp).elim
      * exact (ofNat_zero_not_pos hp).elim

```

```

* intro hk
  simp [ofNat] at hk
  exact Or.inl <hk, Or.inl ofNat_zero_nonempty>

theorem uvV_zero_zero : uvV (ofNat 0) (ofNat 0) = ofNat 0 := by
  ext k
  constructor
  * intro hk
    rcases hk with hk0 | <_, hpos> | htop
    * simpa [ofNat] using hk0
    * rcases hpos with hp | hp
      * exact (ofNat_zero_not_pos hp).elim
      * exact (ofNat_zero_not_pos hp).elim
    * exact (ofNat_zero_not_pos htop.2.1).elim
  * intro hk
    simp [ofNat] at hk

```

Lean 4 source (lines 1201–1600)

```

  exact Or.inl hk

theorem top_pos : exists n, n + 1 in topElem :=
  <0, Set.mem_univ 1>

theorem uvU_bot_top : uvU botElem topElem = ofNat 0 := by
  ext k
  constructor
  * intro hk
    rcases hk with <hk0, _> | <_, h1>
    * simpa [ofNat] using hk0
    * rcases h1 with <h0, _> | <<n, hn>, _>
      * exact ((mem_botElem 0).mp h0).elim
      * exact ((mem_botElem (n + 1)).mp hn).elim
  * intro hk
    simp [ofNat] at hk
    exact Or.inl <hk, Or.inr <0, Set.mem_univ 0>>

theorem uvV_bot_top : uvV botElem topElem = zeroPrime := by
  ext k
  constructor
  * intro hk
    rcases hk with hk0 | <hk1, _> | htop
    * exact Or.inl hk0
    * exact Or.inr hk1
    * exact ((mem_botElem 0).mp htop.1).elim
  * intro hk
    rcases hk with hk0 | hk1
    * exact Or.inl hk0
    * exact Or.inr (Or.inl <hk1, Or.inr top_pos>)

theorem uvU_top_bot : uvU topElem botElem = ofNat 0 := by
  ext k
  constructor
  * intro hk
    rcases hk with <hk0, _> | <_, h1>
    * simpa [ofNat] using hk0
    * rcases h1 with <_, <n, hn>> | <_, h0>
      * exact ((mem_botElem (n + 1)).mp hn).elim
      * exact ((mem_botElem 0).mp h0).elim
  * intro hk
    simp [ofNat] at hk
    exact Or.inl <hk, Or.inl <0, Set.mem_univ 0>>

theorem uvV_top_bot : uvV topElem botElem = zeroPrime := by

```

```

ext k
constructor
* intro hk
  rcases hk with hk0 | <hk1, _> | htop
  * exact Or.inl hk0
  * exact Or.inr hk1
  * exact ((mem_botElem 0).mp htop.2.2.1).elim
* intro hk
  rcases hk with hk0 | hk1
  * exact Or.inl hk0
  * exact Or.inr (Or.inl <hk1, Or.inl top_pos>)

theorem uvU_zero_top : uvU (ofNat 0) topElem = zeroPrime := by
  ext k
  constructor
  * intro hk
    rcases hk with <hk0, _> | <hk1, _>
    * exact Or.inl hk0
    * exact Or.inr hk1
  * intro hk
    rcases hk with hk0 | hk1
    * exact Or.inl <hk0, Or.inr <0, Set.mem_univ 0>>
    * exact Or.inr <hk1, Or.inl <rfl, top_pos>>

theorem uvV_zero_top : uvV (ofNat 0) topElem = zeroPrime := by
  ext k
  constructor
  * intro hk
    rcases hk with hk0 | <hk1, _> | htop
    * exact Or.inl hk0
    * exact Or.inr hk1
    * exact (ofNat_zero_not_pos htop.2.1).elim
  * intro hk
    rcases hk with hk0 | hk1
    * exact Or.inl hk0
    * exact Or.inr (Or.inl <hk1, Or.inr top_pos>)

theorem uvU_top_zero : uvU topElem (ofNat 0) = zeroPrime := by
  ext k
  constructor
  * intro hk
    rcases hk with <hk0, _> | <hk1, _>
    * exact Or.inl hk0
    * exact Or.inr hk1
  * intro hk
    rcases hk with hk0 | hk1
    * exact Or.inl <hk0, Or.inl <0, Set.mem_univ 0>>
    * exact Or.inr <hk1, Or.inr <top_pos, rfl>>

theorem uvV_top_zero : uvV topElem (ofNat 0) = zeroPrime := by
  ext k
  constructor
  * intro hk
    rcases hk with hk0 | <hk1, _> | htop
    * exact Or.inl hk0
    * exact Or.inr hk1
    * exact (ofNat_zero_not_pos htop.2.2.2).elim
  * intro hk
    rcases hk with hk0 | hk1
    * exact Or.inl hk0
    * exact Or.inr (Or.inl <hk1, Or.inl top_pos>)

theorem uvU_top_top : uvU topElem topElem = zeroPrime := by

```

```

ext k
constructor
* intro hk
  rcases hk with <hk0, _> | <hk1, _>
  * exact Or.inl hk0
  * exact Or.inr hk1
* intro hk
  rcases hk with hk0 | hk1
  * exact Or.inl <hk0, Or.inl <0, Set.mem_univ 0>>
  * exact Or.inr <hk1, Or.inl <Set.mem_univ 0, top_pos>>

theorem uvV_top_top : uvV topElem topElem = topElem := by
  ext k
  constructor
  * intro _; exact Set.mem_univ k
  * intro _
    exact Or.inr (Or.inr <Set.mem_univ 0, top_pos, Set.mem_univ 0, top_pos>)

/-- On  $\{False, 0, top\}$ ,  $u(x)(y) = v(x)(y)$  iff  $x = 0$  or  $y = 0$ . -/
theorem uv_eq_iff {x y : Pomega} (hx : IsThreeValued x) (hy : IsThreeValued y) :
  uvU x y = uvV x y <-> x = ofNat 0 \ / y = ofNat 0 := by
  rcases hx with rfl | rfl | rfl <;> rcases hy with rfl | rfl | rfl
  * simp [uvU_bot_bot, uvV_bot_bot, bot_ne_ofNat_zero]
  * simp [uvU_bot_zero, uvV_bot_zero]
  * constructor
  * intro h
    rw [uvU_bot_top, uvV_bot_top] at h
    exact (zeroPrime_ne_ofNat_zero h.symm).elim
  * intro h
    rcases h with h | h
    * exact (bot_ne_ofNat_zero h).elim
    * exact (top_ne_ofNat_zero h).elim
  * simp [uvU_zero_bot, uvV_zero_bot]
  * simp [uvU_zero_zero, uvV_zero_zero]
  * simp [uvU_zero_top, uvV_zero_top]
  * constructor
  * intro h
    rw [uvU_top_bot, uvV_top_bot] at h
    exact (zeroPrime_ne_ofNat_zero h.symm).elim
  * intro h
    rcases h with h | h
    * exact (top_ne_ofNat_zero h).elim
    * exact (bot_ne_ofNat_zero h).elim
  * simp [uvU_top_zero, uvV_top_zero]
  * constructor
  * intro h
    rw [uvU_top_top, uvV_top_top] at h
    exact (zeroPrime_ne_top h).elim
  * intro h
    rcases h with h | h <;> exact (top_ne_ofNat_zero h).elim

theorem charOpen_three (U : Set Pomega) (x : Pomega) :
  IsThreeValued (charOpen U x) := by
  by_cases h : 0 in charOpen U x
  * refine Or.inr (Or.inl ?_)
    ext k
    constructor
    * intro <hk0, _>; simp [ofNat, hk0]
    * intro hk; simp [ofNat] at hk; subst hk; exact h
  * refine Or.inl ?_
    ext k
    constructor
    * intro hk

```

```

    obtain <rfl, n, hn, hne> := hk
    exact h <rfl, n, hn, hne>
* intro hk
    exact ((mem_botElem k).mp hk).elim

theorem closedToZero_three {C : Set Pomega} (hC : IsScottOpen C?) (x : Pomega) :
  IsThreeValued (closedToZero C x) := by
  by_cases hx : x in C
* refine Or.inr (Or.inl ?_)
  have : charTop C? x = botElem := (charTop_eq_bot_of_closed hC x).mpr hx
  ext k
  simp [closedToZero, this, ofNat, botElem]
* refine Or.inr (Or.inr ?_)
  have : charTop C? x = topElem := (charTop_eq_top hC x).mpr hx
  ext k
  simp [closedToZero, this, ofNat, topElem]

theorem charOpen_eq_zero {U : Set Pomega} (hU : IsScottOpen U) (x : Pomega) :
  charOpen U x = ofNat 0 <-> x in U := by
  constructor
* intro h
  have : 0 in charOpen U x := by rw [h]; simp [ofNat]
  obtain <_, n, hn, hne> := this
  exact isScottOpen_isUpper hU hne hn
* intro hx
  ext k
  constructor
* intro <hk0, _>; simp [ofNat, hk0]
* intro hk
  simp [ofNat] at hk
  subst hk
  obtain <n, hn, hne> := (mem_isScottOpen_iff hU).mp hx
  exact <rfl, n, hn, hne>

theorem closedToZero_eq_zero {C : Set Pomega} (hC : IsScottOpen C?) (x : Pomega) :
  closedToZero C x = ofNat 0 <-> x in C := by
  constructor
* intro h
  by_contra hx
  have htop : charTop C? x = topElem := (charTop_eq_top hC x).mpr hx
  have : closedToZero C x = topElem := by
    ext k
    simp [closedToZero, htop]
  exact top_ne_ofNat_zero (this.symm.trans h)
* intro hx
  have : charTop C? x = botElem := (charTop_eq_bot_of_closed hC x).mpr hx
  ext k
  simp [closedToZero, this, ofNat, botElem]

theorem isScottOpen_not_subset {f : Pomega -> Pomega} (hf : IsScottContinuous f)
  (e : Pomega) : IsScottOpen {x | not f x subseteq e} := by
  have : {x | not f x subseteq e} = ? k, {x | k notin e /\ k in f x} := by
    ext x
  constructor
* intro hx
  obtain <k, hk, hke> := Set.not_subset.mpr hx
  exact Set.mem_iUnion.mpr <k, <hke, hk>>
* intro hx
  obtain <k, hke, hk> := Set.mem_iUnion.mpr hx
  intro hsub
  exact hke (hsub hk)
rw [this]
exact isScottOpen_iUnion _ fun k => by

```

```

by_cases hke : k in e
* have : {x | k notin e /\ k in f x} = ({ } : Set Pomega) := by
  ext x; simp [hke]
  rw [this]; exact isScottOpen_empty
* have : {x | k notin e /\ k in f x} = {x | k in f x} := by
  ext x; simp [hke]
  rw [this]; exact mem_preimage_isScottOpen hf k

theorem isScottOpen_subset_preimage {f : Pomega -> Pomega} (hf : IsScottContinuous f)
  {e : Pomega} (he : e.Finite) : IsScottOpen {x | e subseteq f x} := by
  have : {x | e subseteq f x} = ? k in he.toFinset, {x | k in f x} := by
    ext x
    constructor
  * intro hx
    exact Set.mem_iInter_2.mpr fun k hk => hx (he.mem_toFinset.mp hk)
  * intro hx k hk
    exact Set.mem_iInter_2.mp hx k (he.mem_toFinset.mpr hk)
  rw [this, isScottOpen_iff_isOpen]
  exact isOpen_biInter_finset fun k _ =>
    (isScottOpen_iff_isOpen _).mp (mem_preimage_isScottOpen hf k)

theorem ne_eq_open_union_closed {f : Pomega -> Pomega} (hf : IsScottContinuous f)
  {e : Pomega} (he : e.Finite) :
  {x | f x != e} = {x | not f x subseteq e} U {x | not e subseteq f x} /\
  IsScottOpen {x | not f x subseteq e} /\
  IsScottOpen {x | not e subseteq f x}? := by
  refine <?_, isScottOpen_not_subset hf e, ?_>
  * ext x
    constructor
  * intro hne
    by_cases hsub : f x subseteq e
    * refine Or.inr fun hsup => hne (subset_antisymm hsub hsup)
    * exact Or.inl hsub
  * intro h heq
    rcases h with h | h
    * exact h heq.subset
    * exact h heq.symm.subset
  * have : {x | not e subseteq f x}? = {x | e subseteq f x} := by
    ext x; simp
  rw [this]
  exact isScottOpen_subset_preimage hf he

/-- Every Boolean set is a countable intersection of `(open U closed)` sets,
  by writing the complement in the Theorem 6.6 form `{f in E}` and taking
  De Morgan duals. Extra indices are padded by `univ U {}`. -/
theorem isBooleanOpen_as_iInter_open_union_closed {U : Set Pomega}
  (hU : IsBooleanOpen U) :
  exists (O C : Nat -> Set Pomega),
    (forall n, IsScottOpen (O n)) /\ (forall n, IsScottOpen (C n)?) /\
    U = ? n, O n U C n := by
  have hUc : U? in ScottB := hU.compl
  obtain <f, hf, E, hE, hEfin, hEeq> := (theorem_6_6 U?).mp hUc
  have hrec : forall {S : Set Pomega} (hS : S.Finite),
    (forall e in S, e.Finite) ->
    exists O C : Nat -> Set Pomega,
      (forall n, IsScottOpen (O n)) /\ (forall n, IsScottOpen (C n)?) /\
      {x | f x notin S} = ? n, O n U C n := by
    intro S hS
    induction S, hS using Set.Finite.induction_on with
    | empty =>
      intro
      refine <fun _ => Set.univ, fun _ => {}, fun _ => isScottOpen_univ,
        fun _ => by rw [Set.compl_empty]; exact isScottOpen_univ, ?_>

```

```

ext x
simp
| insert ha hs ih =>
  intro hfin
  rename_i a s
  obtain <Os, Cs, h0s, hCs, hseq> :=
    ih fun e he => hfin e (Set.mem_insert_of_mem a he)
  have haFin : a.Finite := hfin a (Set.mem_insert a s)
  obtain <hslice, h0a, hCa> := ne_eq_open_union_closed hf haFin
  refine <fun n => match n with
    | 0 => {x | not f x subseq a}
    | _n + 1 => Os _n,
    fun n => match n with
    | 0 => {x | not a subseq f x}
    | _n + 1 => Cs _n, ?_, ?_, ?_>
* intro n
  cases n with
  | zero => exact h0a
  | succ n => exact h0s n
* intro n
  cases n with
  | zero => exact hCa
  | succ n => exact hCs n
* have hUeq : {x | f x notin insert a s} =
  ({x | f x != a} I {x | f x notin s}) := by
  ext x
  simp [Set.mem_insert_iff]
rw [hUeq, hslice, hseq]
ext x
constructor
* intro <ha', hs'>
  refine Set.mem_iInter.mpr fun n => ?_
  cases n with
  | zero => exact ha'
  | succ n => exact Set.mem_iInter.mp hs' n
* intro hx
  exact <Set.mem_iInter.mp hx 0,
    Set.mem_iInter.mpr fun n => Set.mem_iInter.mp hx (n + 1)>
obtain <O, C, hO, hC, hOC> := hrec hE hEfin
refine <O, C, hO, hC, ?_>
have hUeq : U = {x | f x notin E} := by
  ext x
  constructor
* intro hxU hfxE
  have hxUc : x in U? := by
    rw [hEeq]
    exact hfxE
  exact hxUc hxU
* intro hx
  by_contra hxU
  apply hx
  change x in {x | f x in E}
  rwa [← hEeq]
rw [hUeq, hOC]

/-- **Scott 1976, Theorem 6.7, `B_?` -> equalizer.**
Each Boolean slice is a countable intersection of `(open U closed)` sets;
each such union is `{f_n = 0} U {g_n = 0}` with three-valued continuous `f_n, g_n`;
Scott's tables pack that union as an equalizer; `pairIndexed` packs the
countable intersection. -/
theorem theorem_6_7_of_bdelta {U : Set Pomega} (hU : IsBdelta U) :
  exists f g, IsScottContinuous f /\ IsScottContinuous g /\ U = {x | f x = g x} := by
  obtain <Bs, hB, rfl> := hU

```



```

have hslice : forall n, exists 0 C : Nat -> Set Pomega,
  (forall k, IsScottOpen (0 k)) /\ (forall k, IsScottOpen (C k)) /\
  Bs n = ? k, 0 k U C k :=
  fun n => isBooleanOpen_as_iInter_open_union_closed (hB n)
choose Os Cs hOs hCs hEq using hslice
let 0 (m : Nat) : Set Pomega := Os (unpair m).1 (unpair m).2
let C (m : Nat) : Set Pomega := Cs (unpair m).1 (unpair m).2
have h0 : forall m, IsScottOpen (0 m) := fun m => hOs (unpair m).1 (unpair m).2
have hC : forall m, IsScottOpen (C m)? := fun m => hCs (unpair m).1 (unpair m).2
have hUC : (? n, Bs n) = ? m, 0 m U C m := by
  ext x
  constructor
  * intro hx
    refine Set.mem_iInter.mpr fun m => ?_
    have hx' := Set.mem_iInter.mp hx (unpair m).1
    rw [hEq] at hx'
    exact Set.mem_iInter.mp hx' (unpair m).2
  * intro hx
    refine Set.mem_iInter.mpr fun n => ?_
    rw [hEq]
    refine Set.mem_iInter.mpr fun k => ?_
    simpa [0, C, unpair_pair] using Set.mem_iInter.mp hx (pair n k)
let f : Nat -> Pomega -> Pomega := fun m x => charOpen (0 m) x
let g : Nat -> Pomega -> Pomega := fun m x => closedToZero (C m) x
have hf : forall m, IsScottContinuous (f m) :=
  fun m => charOpen_isScottContinuous (0 m)
have hg : forall m, IsScottContinuous (g m) :=
  fun m => closedToZero_isScottContinuous (C m)
let F : Nat -> Pomega -> Pomega := fun m x => uvU (f m x) (g m x)
let G : Nat -> Pomega -> Pomega := fun m x => uvV (f m x) (g m x)
have hF : forall m, IsScottContinuous (F m) :=
  fun m => theorem_1_3_tuple (uvU_isScottContinuous_left) (uvU_isScottContinuous_right)
    (hf m) (hg m)
have hG : forall m, IsScottContinuous (G m) :=
  fun m => theorem_1_3_tuple (uvV_isScottContinuous_left) (uvV_isScottContinuous_right)
    (hf m) (hg m)
have hpack : (? n, Bs n) = {x | forall m, F m x = G m x} := by
  rw [hUC]
  ext x
  constructor

```

Lean 4 source (lines 1601–1864)

```

* intro hx m
have hx' := Set.mem_iInter.mp hx m
have hfg : f m x = ofNat 0 \ / g m x = ofNat 0 := by
  rcases hx' with h0m | hCm
  * exact Or.inl ((charOpen_eq_zero (h0 m) x).mpr h0m)
  * exact Or.inr ((closedToZero_eq_zero (hC m) x).mpr hCm)
exact (uv_eq_iff (charOpen_three (0 m) x) (closedToZero_three (hC m) x)).mpr hfg
* intro hx
  refine Set.mem_iInter.mpr fun m => ?_
  have heq := (uv_eq_iff (charOpen_three (0 m) x)
    (closedToZero_three (hC m) x)).mp (hx m)
  rcases heq with hf0 | hg0
  * exact Or.inl ((charOpen_eq_zero (h0 m) x).mp hf0)
  * exact Or.inr ((closedToZero_eq_zero (hC m) x).mp hg0)
exact theorem_6_7_converse_of_equalizers F G hF hG hpack

/-- **Scott 1976, Theorem 6.7 (The  $\mathcal{B}_?$  theorem).**
The  $\mathcal{B}_?$  subsets of  $\mathcal{P}?$  are exactly the equalizers of pairs of continuous
maps. -/
theorem theorem_6_7 :
  forall U, IsBdelta U <=>

```

```

    exists f g, IsScottContinuous f /\ IsScottContinuous g /\
      U = {x | f x = g x} :=
  fun U => <theorem_6_7_of_bdelta, theorem_6_7_of_equalizer U>

theorem isBdelta_inter {U V : Set Pomega} (hU : IsBdelta U) (hV : IsBdelta V) :
  IsBdelta (U I V) := by
  obtain <Bs, hB, rfl> := hU
  obtain <Cs, hC, rfl> := hV
  refine <fun n => Bs (unpair n).1 I Cs (unpair n).2,
    fun n => (hB _).inter (hC _), ?_>
  ext x
  constructor
  * intro hx
    refine Set.mem_iInter.mpr fun n =>
      <Set.mem_iInter.mp hx.1 (unpair n).1, Set.mem_iInter.mp hx.2 (unpair n).2>
  * intro hx
    constructor
    * refine Set.mem_iInter.mpr fun n => ?_
      simpa [unpair_pair] using (Set.mem_iInter.mp hx (pair n 0)).1
    * refine Set.mem_iInter.mpr fun m => ?_
      simpa [unpair_pair] using (Set.mem_iInter.mp hx (pair 0 m)).2

theorem isBdelta_union {U V : Set Pomega} (hU : IsBdelta U) (hV : IsBdelta V) :
  IsBdelta (U U V) := by
  obtain <Bs, hB, rfl> := hU
  obtain <Cs, hC, rfl> := hV
  refine <fun n => Bs (unpair n).1 U Cs (unpair n).2,
    fun n => (hB _).union (hC _), ?_>
  ext x
  constructor
  * intro hx
    refine Set.mem_iInter.mpr fun n => ?_
    rcases hx with hB' | hC'
    * exact Or.inl (Set.mem_iInter.mp hB' (unpair n).1)
    * exact Or.inr (Set.mem_iInter.mp hC' (unpair n).2)
  * intro hx
    by_cases hB' : x in ? n, Bs n
    * exact Or.inl hB'
    * refine Or.inr (Set.mem_iInter.mpr fun m => ?_)
      have : not forall n, x in Bs n := by
        intro hall
        exact hB' (Set.mem_iInter.mpr hall)
      obtain <n, hn> := not_forall.mp this
      have hx' := Set.mem_iInter.mp hx (pair n m)
      simpa [unpair_pair, hn] using hx'

/-
Research remark (Scott 1976, pp. 39-40). Scott asks for LAMBDA-definable
combinators `union` and `inter` that index finite Boolean operations on the
typical `B_?` set `B` of Table 3:

  `{x | union(f)(g)(x) in B} = {x | f(x) in B} U {x | g(x) in B}`

and likewise for intersection. The combinator API (`S`, `K`, `cond`, `seq2`,
`interC`, ...) does not supply these index combinators, and Scott himself
leaves their extraction as an investigation. Set-theoretic continuous
indexers exist (`typicalBdelta_universal`, `isBdelta_union`,
`isBdelta_inter`), but LAMBDA-definability is not recorded as a theorem.
-/

theorem seq2_isScottContinuous_left (y : Pomega) :
  IsScottContinuous (fun x => seq2 x y) :=
  graph_const_isScottContinuous

```

```

    (fun x z => condSet z x (condSet (predSet z) y botElem))
    (fun z => condSet_isScottContinuous_mid z _)

theorem seq2_isScottContinuous_right (x : Pomega) :
  IsScottContinuous (fun y => seq2 x y) :=
  graph_const_isScottContinuous
    (fun y z => condSet z x (condSet (predSet z) y botElem))
    (fun z =>
      theorem_1_3 (condSet_isScottContinuous_right z x)
        (condSet_isScottContinuous_mid (predSet z) botElem))

theorem seq2_pair_isScottContinuous {f g : Pomega -> Pomega}
  (hf : IsScottContinuous f) (hg : IsScottContinuous g) :
  IsScottContinuous (fun x => seq2 (f x) (g x)) :=
  theorem_1_3_tuple seq2_isScottContinuous_left seq2_isScottContinuous_right hf hg

def typicalG : Set Pomega := {x | 0 in x}
def typicalF : Set Pomega := {botElem}
def typicalGdelta : Set Pomega := {topElem}
def typicalFcapG : Set Pomega := {ofNat 0}
def typicalFcapGdelta : Set Pomega := {succSet topElem}
def typicalBdelta : Set Pomega :=
  {u | funOf u (ofNat 0) = funOf u (ofNat 1)}
def typicalSigma11 : Set Pomega :=
  {u | exists y, funOf u (ofNat 0) ? y = funOf u (ofNat 1) ? y}
def typicalPi11 : Set Pomega :=
  {u | forall y, exists z, funOf (funOf u y) z = ofNat 0}

def IsSigma11 (U : Set Pomega) : Prop :=
  exists f g, IsScottContinuous f /\ IsScottContinuous g /\
    U = {x | exists y, funOf (f x) y = funOf (g x) y}

def IsPi11 (U : Set Pomega) : Prop :=
  exists h, IsScottContinuous h /\
    U = {x | forall y, exists z, funOf (funOf (h x) y) z = ofNat 0}

theorem typicalG_isScottOpen : IsScottOpen typicalG :=
  ((theorem_6_1).1 (fun x => x) id_isScottContinuous)

theorem typicalG_mem_ScottG : typicalG in ScottG :=
  typicalG_isScottOpen

/-- **Scott 1976, Table 3 / Theorem 6.1.** `?` is the class of continuous
preimages of the typical open set `{x | 0 in x}`. -/
theorem typicalG_universal (U : Set Pomega) :
  IsScottOpen U <-> exists f, IsScottContinuous f /\ U = {x | f x in typicalG} := by
  constructor
  * intro hU
    obtain <f, hf, rfl> := (theorem_6_1).2 U hU
    exact <f, hf, rfl>
  * rintro <f, hf, rfl>
    exact (theorem_6_1).1 f hf

theorem typicalF_mem_ScottF : typicalF in ScottF :=
  (theorem_6_2 typicalF).mpr <fun x => x, id_isScottContinuous, rfl>

/-- **Scott 1976, Table 3 / Theorem 6.2.** `?` is the class of continuous
preimages of `{False}`. -/
theorem typicalF_universal (U : Set Pomega) :
  U in ScottF <-> exists f, IsScottContinuous f /\ U = {x | f x in typicalF} :=
  theorem_6_2 U

/-- **Scott 1976, Table 3.** `{ top }` is a `G?`. -/

```

```

theorem typicalGdelta_eq : typicalGdelta = ? n, {x : Pomega | n in x} := by
  ext x
  constructor
  * intro hx
    refine Set.mem_iInter.mpr fun n => ?_
    have hx' : x = topElem := hx
    simp [hx']
  * intro hx
    ext k
    constructor
    * intro _; trivial
    * intro _
      exact Set.mem_iInter.mp hx k

theorem typicalGdelta_isScottGdelta : IsScottGdelta typicalGdelta :=
  (theorem_6_3 typicalGdelta).mpr <fun x => x, id_isScottContinuous, rfl>

/-- **Scott 1976, Table 3 / Theorem 6.3.** `?_?` is the class of continuous
preimages of `{ top }`. -/
theorem typicalGdelta_universal (U : Set Pomega) :
  IsScottGdelta U <-> exists f, IsScottContinuous f /\ U = {x | f x in typicalGdelta}
:=
  theorem_6_3 U

theorem typicalFcapG_isFcapG : IsFcapG typicalFcapG :=
  (theorem_6_4 typicalFcapG).mpr <fun x => x, id_isScottContinuous, rfl>

/-- **Scott 1976, Table 3 / Theorem 6.4.** `? I ?` is the class of continuous
preimages of `{0}`. -/
theorem typicalFcapG_universal (U : Set Pomega) :
  IsFcapG U <-> exists f, IsScottContinuous f /\ U = {x | f x in typicalFcapG} :=
  theorem_6_4 U

theorem typicalFcapGdelta_isFcapGdelta : IsFcapGdelta typicalFcapGdelta :=
  (theorem_6_5 typicalFcapGdelta).mpr <fun x => x, id_isScottContinuous, rfl>

/-- **Scott 1976, Table 3 / Theorem 6.5.** `? I ?_?` is the class of
continuous preimages of `{ top + 1 }`. -/
theorem typicalFcapGdelta_universal (U : Set Pomega) :
  IsFcapGdelta U <->
    exists f, IsScottContinuous f /\ U = {x | f x in typicalFcapGdelta} :=
  theorem_6_5 U

theorem typicalBdelta_isBdelta : IsBdelta typicalBdelta :=
  (theorem_6_7 typicalBdelta).mpr
    <fun u => funOf u (ofNat 0), fun u => funOf u (ofNat 1),
    funOf_isScottContinuous_left (ofNat 0),
    funOf_isScottContinuous_left (ofNat 1), rfl>

/-- **Scott 1976, Table 3 / Theorem 6.7.** `?_?` is the class of continuous
preimages of `{u | u_0 = u_1}`. -/
theorem typicalBdelta_universal (U : Set Pomega) :
  IsBdelta U <-> exists f, IsScottContinuous f /\ U = {x | f x in typicalBdelta} := by
  constructor
  * intro hU
    obtain <F, G, hF, hG, rfl> := (theorem_6_7 U).mp hU
    refine <fun x => seq2 (F x) (G x), seq2_pair_isScottContinuous hF hG, ?_>
    ext x
    constructor
    * intro h
      change funOf (seq2 (F x) (G x)) (ofNat 0) =
        funOf (seq2 (F x) (G x)) (ofNat 1)
      rw [seq2_app_zero, seq2_app_one]

```

```

    exact h
* intro h
  have : funOf (seq2 (F x) (G x)) (ofNat 0) =
    funOf (seq2 (F x) (G x)) (ofNat 1) := h
  rw [seq2_app_zero, seq2_app_one] at this
  exact this
* rintro <f, hf, rfl>
  exact (theorem_6_7 _).mpr
    <fun x => funOf (f x) (ofNat 0), fun x => funOf (f x) (ofNat 1),
    theorem_1_3 (f := fun u => funOf u (ofNat 0))
      (funOf_isScottContinuous_left (ofNat 0)) hf,
    theorem_1_3 (f := fun u => funOf u (ofNat 1))
      (funOf_isScottContinuous_left (ofNat 1)) hf, rfl>

theorem typicalSigma11_isSigma11 : IsSigma11 typicalSigma11 :=
  <fun u => funOf u (ofNat 0), fun u => funOf u (ofNat 1),
  funOf_isScottContinuous_left (ofNat 0),
  funOf_isScottContinuous_left (ofNat 1), rfl>

/-- **Scott 1976, Table 3.** `Sigma_11` is the class of continuous preimages of
`{u | exists y. u_0(y) = u_1(y)}`. -/
theorem typicalSigma11_universal (U : Set Pomega) :
  IsSigma11 U <-> exists f, IsScottContinuous f /\ U = {x | f x in typicalSigma11} :=
  by
  constructor
* rintro <f, g, hf, hg, rfl>
  refine <fun x => seq2 (f x) (g x), seq2_pair_isScottContinuous hf hg, ?_>
  ext x
  constructor
* intro <y, hy>
  refine <y, ?_>
  simpa [seq2_app_zero, seq2_app_one] using hy
* intro <y, hy>
  refine <y, ?_>
  simpa [seq2_app_zero, seq2_app_one] using hy
* rintro <f, hf, rfl>
  exact <fun x => funOf (f x) (ofNat 0), fun x => funOf (f x) (ofNat 1),
  theorem_1_3 (f := fun u => funOf u (ofNat 0))
    (funOf_isScottContinuous_left (ofNat 0)) hf,
  theorem_1_3 (f := fun u => funOf u (ofNat 1))
    (funOf_isScottContinuous_left (ofNat 1)) hf, rfl>

theorem typicalPi11_isPi11 : IsPi11 typicalPi11 :=
  <fun u => u, id_isScottContinuous, rfl>

/-- **Scott 1976, Table 3.** `?_11` is the class of continuous preimages of
`{u | forall y exists z. u(y)(z) = 0}`. -/
theorem typicalPi11_universal (U : Set Pomega) :
  IsPi11 U <-> exists f, IsScottContinuous f /\ U = {x | f x in typicalPi11} := by
  constructor
* rintro <h, hh, rfl>
  exact <h, hh, rfl>
* rintro <f, hf, rfl>
  exact <f, hf, rfl>

end Scott1976.DataTypesAsLattices

```

A.14 Scott1976/DataTypesAsLattices/Functionality.lean

4001 lines.

Lean 4 source (lines 1–400)

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/
import Scott1976.DataTypesAsLattices.Retracts

/-!
# Scott 1976, S7 -- restricted equivalences and functionality

Theorems 7.1-7.4.
-/

namespace Scott1976.DataTypesAsLattices

/-- Pairing of elements of  $P^\omega$  as a graph (Table 2 / (2.21)). -/
def pairElem (x y : Pomega) : Pomega := seq2 x y

theorem pairElem_fst (x y : Pomega) : funOf (pairElem x y) (ofNat 0) = x :=
  seq2_app_zero x y

theorem pairElem_snd (x y : Pomega) : funOf (pairElem x y) (ofNat 1) = y :=
  seq2_app_one x y

theorem pairElem_tag_ne (x y : Pomega) :
  pairElem (ofNat 0) x != pairElem (ofNat 1) y :=
  seq2_tag_ne x y

theorem pairElem_eq_pairSeq (x y : Pomega) : pairElem x y = pairSeq x y := rfl

theorem pairSeq_app_zero (x y : Pomega) : funOf (pairSeq x y) (ofNat 0) = x :=
  seq2_app_zero x y

theorem pairSeq_app_one (x y : Pomega) : funOf (pairSeq x y) (ofNat 1) = y :=
  seq2_app_one x y

theorem pairSeq_inj {x y x' y' : Pomega} (h : pairSeq x y = pairSeq x' y') :
  x = x' /\ y = y' := by
  constructor
  * have := congrArg (fun w => funOf w (ofNat 0)) h
    rw [pairSeq_app_zero, pairSeq_app_zero] at this
    exact this
  * have := congrArg (fun w => funOf w (ofNat 1)) h
    rw [pairSeq_app_one, pairSeq_app_one] at this
    exact this

theorem pairElem_inj {x y x' y' : Pomega} (h : pairElem x y = pairElem x' y') :
  x = x' /\ y = y' :=
  pairSeq_inj h

theorem condSet_bot (x y : Pomega) : condSet botElem x y = botElem := by
  ext n
  simp [condSet, botElem]

theorem condSet_ofNat_zero (x y : Pomega) : condSet (ofNat 0) x y = x := by
  ext n
  simp [condSet, ofNat]

theorem condSet_ofNat_one (x y : Pomega) : condSet (ofNat 1) x y = y := by
  ext n
  simp [condSet, ofNat]

theorem condSet_ofNat_succ (n : Nat) (x y : Pomega) :

```

```

    condSet (ofNat (n + 1)) x y = y := by
  ext k
  simp [condSet, ofNat]

theorem funOf_top (x : Pomega) : funOf topElem x = topElem := by
  ext m
  constructor
  * intro
  trivial
  * intro
  exact <0, by simp [e_zero], trivial>

/-- **Scott 1976, S7, Definition.** A restricted equivalence is a
symmetric transitive relation, coded as a set of pairs. -/
structure RestrictedEquiv where
  rel : Pomega -> Pomega -> Prop
  symm : forall {x y}, rel x y -> rel y x
  trans : forall {x y z}, rel x y -> rel y z -> rel x z

/-- `x : A` means `x A x`. -/
def RestrictedEquiv.mem (A : RestrictedEquiv) (x : Pomega) : Prop :=
  A.rel x x

/-- Empty restricted equivalence (never related). -/
def emptyE : RestrictedEquiv where
  rel := fun _ _ => False
  symm := fun h => False.elim h
  trans := fun h _ => False.elim h

/-- Singleton identity `{<a, a>}`. -/
def singletonE (a : Pomega) : RestrictedEquiv where
  rel := fun x y => x = a /\ y = a
  symm := by
    intro x y <hx, hy>
    exact <hy, hx>
  trans := by
    intro x y z <hx, _hy> <_hy', hz>
    exact <hx, hz>

theorem singletonE_mem (a x : Pomega) : (singletonE a).mem x <-> x = a :=
  <fun h => h.1, fun hx => <hx, hx>>

/-- **Scott 1976, (7.6).** Function space of restricted equivalences. -/
def arrowE (A B : RestrictedEquiv) : RestrictedEquiv where
  rel := fun f g =>
    f = graph (fun x => funOf f x) /\
    g = graph (fun x => funOf g x) /\
    forall x y, A.rel x y -> B.rel (funOf f x) (funOf g y)
  symm := by
    intro f g <hf, hg, h>
    exact <hg, hf, fun x y hxy => B.symm (h y x (A.symm hxy))>
  trans := by
    intro f g k <hf, hg, hfg> <hg', hk, hkg>
    exact <hf, hk, fun x y hxy =>
      B.trans (hfg x y hxy) (hkg y y (A.trans (A.symm hxy) hxy))>

/-- **Scott 1976, (7.7).** Product of restricted equivalences. -/
def prodE (A B : RestrictedEquiv) : RestrictedEquiv where
  rel := fun u v =>
    u = pairElem (funOf u (ofNat 0)) (funOf u (ofNat 1)) /\
    v = pairElem (funOf v (ofNat 0)) (funOf v (ofNat 1)) /\
    A.rel (funOf u (ofNat 0)) (funOf v (ofNat 0)) /\
    B.rel (funOf u (ofNat 1)) (funOf v (ofNat 1))

```

```

symm := by
  intro u v <hu, hv, h0, h1>
  exact <hv, hu, A.symm h0, B.symm h1>
trans := by
  intro u v w <hu, hv, h0, h1> <hv', hw, k0, k1>
  exact <hu, hw, A.trans h0 k0, B.trans h1 k1>

/-- **Scott 1976, (7.8).** Sum of restricted equivalences. -/
def sumE (A B : RestrictedEquiv) : RestrictedEquiv where
  rel := fun u v =>
    (u = pairElem (ofNat 0) (funOf u (ofNat 1))) /\
    v = pairElem (ofNat 0) (funOf v (ofNat 1))) /\
    A.rel (funOf u (ofNat 1)) (funOf v (ofNat 1))) \/\
    (u = pairElem (ofNat 1) (funOf u (ofNat 1))) /\
    v = pairElem (ofNat 1) (funOf v (ofNat 1))) /\
    B.rel (funOf u (ofNat 1)) (funOf v (ofNat 1)))
  symm := by
    intro u v h
    rcases h with <hu, hv, hA> | <hu, hv, hB>
    * exact Or.inl <hv, hu, A.symm hA>
    * exact Or.inr <hv, hu, B.symm hB>
  trans := by
    intro u v w h1 h2
    rcases h1 with <hu, hv, hA> | <hu, hv, hB>
    * rcases h2 with <hv', hw, hA'> | <hv', hw, _>
    * exact Or.inl <hu, hw, A.trans hA hA'>
    * exact (pairElem_tag_ne (funOf v (ofNat 1)) (funOf v (ofNat 1)))
      (hv.symm.trans hv')).elim
    * rcases h2 with <hv', hw, _> | <hv', hw, hB'>
    * exact (pairElem_tag_ne (funOf v (ofNat 1)) (funOf v (ofNat 1)))
      (hv'.symm.trans hv')).elim
    * exact Or.inr <hu, hw, B.trans hB hB'>

/-- **Scott 1976, Theorem 7.1 (The closure theorem).** -/
theorem theorem_7_1 (A B : RestrictedEquiv) :
  (forall f, (arrowE A B).mem f <->
    f = graph (fun x => funOf f x)) /\
    forall x y, A.rel x y -> B.rel (funOf f x) (funOf f y)) /\
    (forall {f x}, (arrowE A B).mem f -> A.mem x -> B.mem (funOf f x)) /\
    (forall u, (prodE A B).mem u <->
      u = pairElem (funOf u (ofNat 0)) (funOf u (ofNat 1)) /\
      A.mem (funOf u (ofNat 0)) /\ B.mem (funOf u (ofNat 1))) /\
    (forall u, (sumE A B).mem u <->
      (u = pairElem (ofNat 0) (funOf u (ofNat 1)) /\
        A.mem (funOf u (ofNat 1))) \/\
      (u = pairElem (ofNat 1) (funOf u (ofNat 1)) /\
        B.mem (funOf u (ofNat 1)))) := by
  refine <?_, ?_, ?_, ?_>
  * intro f
  constructor
  * intro hf
  exact <hf.1, fun x y hxy => hf.2.2 x y hxy>
  * intro <hf, hpres>
  exact <hf, hf, hpres>
  * intro f x hf hx
  exact hf.2.2 x x hx
  * intro u
  constructor
  * intro hu
  exact <hu.1, hu.2.2.1, hu.2.2.2>
  * intro <hu, hA, hB>
  exact <hu, hu, hA, hB>
  * intro u

```



```

    constructor
    * intro hu
      rcases hu with <hu, _, hA> | <hu, _, hB>
    * exact Or.inl <hu, hA>
    * exact Or.inr <hu, hB>
  * intro h
    rcases h with <hu, hA> | <hu, hB>
  * exact Or.inl <hu, hu, hA>
  * exact Or.inr <hu, hu, hB>

/-- **Scott 1976, (7.4).** Identity relation on the range of a retract. -/
def Ea (a : Pomega) : RestrictedEquiv where
  rel := fun x y => typed x a /\ typed y a /\ x = y
  symm := by
    intro x y <hx, hy, h>
    exact <hy, hx, h.symm>
  trans := by
    intro x y z <hx, hy, hxy> <_, hz, hyz>
    exact <hx, hz, hxy.trans hyz>

/-- Kernel relation `{<x, y> | a(x) = a(y)}`. -/
def kerE (a : Pomega) : RestrictedEquiv where
  rel := fun x y => funOf a x = funOf a y
  symm := by
    intro x y h
    exact h.symm
  trans := by
    intro x y z hxy hyz
    exact hxy.trans hyz

/-- **Scott 1976, Theorem 7.2 (i).** `E_a` is the identity on the range of `a`. -/
theorem theorem_7_2_i (a x y : Pomega) :
  (Ea a).rel x y <-> typed x a /\ typed y a /\ x = y :=
  Iff.rfl

/-- The spaces of `E_a` and of `{<x, y> | a(x) = a(y)}` are isomorphic:
classes of the kernel are represented uniquely by range elements. -/
theorem theorem_7_2_i_iso {a : Pomega} (ha : IsRetract a) (x y : Pomega) :
  funOf a x = funOf a y <-> (Ea a).rel (funOf a x) (funOf a y) := by
  constructor
  * intro h
    refine <?_, ?_, h>
    * exact (retract_app ha x).symm
    * exact (retract_app ha y).symm
  * intro h
    exact h.2.2

theorem kerE_repr {a : Pomega} (ha : IsRetract a) (x : Pomega) :
  (kerE a).rel x (funOf a x) :=
  (retract_app ha x).symm

/-- **Scott 1976, (7.9).** The type of total integers. -/
def Nrel : RestrictedEquiv where
  rel := fun x y => (exists n, x = ofNat n) /\ x = y
  symm := by
    intro x y <hn, h>
    exact <by rw [ <- h]; exact hn, h.symm>
  trans := by
    intro x y z <hn, hxy> <_, hyz>
    exact <hn, hxy.trans hyz>

/-- **Scott 1976, (7.12).** Finite discrete spaces. -/
def Nk (k : Nat) : RestrictedEquiv where

```

```

rel := fun x y => (exists n < k, x = ofNat n) /\ x = y
symm := by
  intro x y <hn, h>
  exact <by rw [ <- h]; exact hn, h.symm>
trans := by
  intro x y z <hn, hxy> <_, hyz>
  exact <hn, hxy.trans hyz>

/-- Diagonal continuity, packaged from Theorem 1.3. -/
theorem continuous_on_diag {F : Pomega -> Pomega -> Pomega}
  (h1 : forall y, IsScottContinuous (fun x => F x y))
  (h2 : forall x, IsScottContinuous (fun y => F x y)) :
  IsScottContinuous (fun x => F x x) := by
  intro x
  have H := theorem_1_3_diag (x := x) (f := F) h1 h2
  ext k
  constructor
  * intro hk
    have : k in ? n, {k | e n subseq x /\ k in F (e n) (e n)} := by rwa [ <- H]
    obtain <n, hn, hkn> := Set.mem_iUnion.mp this
    exact mem_scottUnion.mpr <n, hn, hkn>
  * intro hk
    obtain <n, hn, hkn> := mem_scottUnion.mp hk
    have : k in ? n, {k | e n subseq x /\ k in F (e n) (e n)} :=
      Set.mem_iUnion.mpr <n, hn, hkn>
    rwa [ <- H] at this

theorem continuous_tuple {F : Pomega -> Pomega -> Pomega}
  (h1 : forall y, IsScottContinuous (fun x => F x y))
  (h2 : forall x, IsScottContinuous (fun y => F x y))
  {g h : Pomega -> Pomega} (hg : IsScottContinuous g) (hh : IsScottContinuous h) :
  IsScottContinuous (fun x => F (g x) (h x)) :=
  continuous_on_diag
    (fun v => theorem_1_3 (h1 (h v)) hg)
    (fun u => theorem_1_3 (h2 (g u)) hh)

theorem continuous_nary {F : Pomega -> Pomega -> Pomega -> Pomega}
  (hf0 : forall y z, IsScottContinuous (fun x => F x y z))
  (hf1 : forall x z, IsScottContinuous (fun y => F x y z))
  (hf2 : forall x y, IsScottContinuous (fun z => F x y z))
  {g h i : Pomega -> Pomega}
  (hg : IsScottContinuous g) (hh : IsScottContinuous h) (hi : IsScottContinuous i) :
  IsScottContinuous (fun x => F (g x) (h x) (i x)) :=
  continuous_on_diag
    (fun v => continuous_tuple (fun y => hf0 y (i v)) (fun x => hf1 x (i v)) hg hh)
    (fun u => theorem_1_3 (hf2 (g u) (h u)) hi)

/-- Coproduct mediator in the category of restricted equivalences. -/
def sumMed (f g : Pomega) : Pomega :=
  graph (fun u =>
    condSet (funOf u (ofNat 0))
      (funOf f (funOf u (ofNat 1)))
      (funOf g (funOf u (ofNat 1))))

theorem sumMed_body_isScottContinuous (f g : Pomega) :
  IsScottContinuous (fun u =>
    condSet (funOf u (ofNat 0))
      (funOf f (funOf u (ofNat 1)))
      (funOf g (funOf u (ofNat 1)))) :=
  continuous_nary
    (fun y z => condSet_isScottContinuous_left y z)
    (fun x z => condSet_isScottContinuous_mid x z)
    (fun x y => condSet_isScottContinuous_right x y)

```

```

    (funOf_isScottContinuous_left (ofNat 0))
    (theorem_1_3 (funOf_isScottContinuous f)
      (funOf_isScottContinuous_left (ofNat 1)))
    (theorem_1_3 (funOf_isScottContinuous g)
      (funOf_isScottContinuous_left (ofNat 1)))

theorem sumMed_app (f g u : Pomega) :
  funOf (sumMed f g) u =
    condSet (funOf u (ofNat 0))
      (funOf f (funOf u (ofNat 1)))
      (funOf g (funOf u (ofNat 1))) :=
  beta (sumMed_body_isScottContinuous f g) u

theorem sumMed_app_inl (f g x : Pomega) :
  funOf (sumMed f g) (pairElem (ofNat 0) x) = funOf f x := by
  rw [sumMed_app, pairElem_fst, pairElem_snd, condSet_ofNat_zero]

theorem sumMed_app_inr (f g x : Pomega) :
  funOf (sumMed f g) (pairElem (ofNat 1) x) = funOf g x := by
  rw [sumMed_app, pairElem_fst, pairElem_snd, condSet_ofNat_one]

theorem sumMed_isGraph (f g : Pomega) :
  sumMed f g = graph (fun u => funOf (sumMed f g) u) := by
  apply graph_ext
  intro u
  exact (sumMed_app f g u).symm

theorem sumMed_rel {A B C : RestrictedEquiv} {f g : Pomega}
  (hf : (arrowE A C).mem f) (hg : (arrowE B C).mem g) :
  (arrowE (sumE A B) C).mem (sumMed f g) := by
  refine <sumMed_isGraph f g, sumMed_isGraph f g, ?_>
  intro u v huv
  rcases huv with <hu, hv, hA> | <hu, hv, hB>
  * have hmu : funOf (sumMed f g) u = funOf f (funOf u (ofNat 1)) :=
    (congrArg (fun w => funOf (sumMed f g) w) hu).trans
    (sumMed_app_inl f g _)
  have hmv : funOf (sumMed f g) v = funOf f (funOf v (ofNat 1)) :=
    (congrArg (fun w => funOf (sumMed f g) w) hv).trans
    (sumMed_app_inl f g _)
  rw [hmu, hmv]
  exact hf.2.2 (funOf u (ofNat 1)) (funOf v (ofNat 1)) hA
  * have hmu : funOf (sumMed f g) u = funOf g (funOf u (ofNat 1)) :=
    (congrArg (fun w => funOf (sumMed f g) w) hu).trans
    (sumMed_app_inr f g _)
  have hmv : funOf (sumMed f g) v = funOf g (funOf v (ofNat 1)) :=
    (congrArg (fun w => funOf (sumMed f g) w) hv).trans
    (sumMed_app_inr f g _)
  rw [hmu, hmv]
  exact hg.2.2 (funOf u (ofNat 1)) (funOf v (ofNat 1)) hB

/-- Coproduct mediators are unique up to the codomain restricted
equivalence, which is categorical arrow equality in this presentation. -/
theorem sumMed_rel_unique {A B C : RestrictedEquiv} {f g h : Pomega}
  (hh : (arrowE (sumE A B) C).mem h)
  (hinl : forall x y, A.rel x y ->
    C.rel (funOf h (pairElem (ofNat 0) x)) (funOf f y))
  (hinr : forall x y, B.rel x y ->
    C.rel (funOf h (pairElem (ofNat 1) x)) (funOf g y)) :
  (arrowE (sumE A B) C).rel h (sumMed f g) := by
  refine <hh.1, sumMed_isGraph f g, ?_>
  intro u v huv
  rcases huv with <hu, hv, hA> | <hu, hv, hB>
  * have hhu :

```

```

      funOf h u = funOf h (pairElem (ofNat 0) (funOf u (ofNat 1))) :=
    congrArg (fun w => funOf h w) hu
  have hmv : funOf (sumMed f g) v = funOf f (funOf v (ofNat 1)) :=
    (congrArg (fun w => funOf (sumMed f g) w) hv).trans
      (sumMed_app_inl f g _)
  rw [hhu, hmv]
  exact hinl (funOf u (ofNat 1)) (funOf v (ofNat 1)) hA
* have hhu :
  funOf h u = funOf h (pairElem (ofNat 1) (funOf u (ofNat 1))) :=
  congrArg (fun w => funOf h w) hu
  have hmv : funOf (sumMed f g) v = funOf g (funOf v (ofNat 1)) :=
    (congrArg (fun w => funOf (sumMed f g) w) hv).trans
      (sumMed_app_inr f g _)
  rw [hhu, hmv]
  exact hinr (funOf u (ofNat 1)) (funOf v (ofNat 1)) hB

theorem pairSeq_isScottContinuous_left (y : Pomega) :
  IsScottContinuous (fun x => pairSeq x y) :=
graph_const_isScottContinuous
  (fun x z => condSet z x (condSet (predSet z) y botElem))
  (fun z => condSet_isScottContinuous_mid z _)

Lean 4 source (lines 401–800)

theorem pairSeq_isScottContinuous_right (x : Pomega) :
  IsScottContinuous (fun y => pairSeq x y) :=
graph_const_isScottContinuous
  (fun y z => condSet z x (condSet (predSet z) y botElem))
  (fun z =>
    theorem_1_3 (condSet_isScottContinuous_right z x)
      (condSet_isScottContinuous_mid (predSet z) botElem))

theorem tensorR_map_isScottContinuous (a b : Pomega) :
  IsScottContinuous (fun u =>
    pairSeq (funOf a (funOf u (ofNat 0))) (funOf b (funOf u (ofNat 1)))) :=
continuous_tuple
  (fun y => pairSeq_isScottContinuous_left y)
  (fun x => pairSeq_isScottContinuous_right x)
  (theorem_1_3 (funOf_isScottContinuous a) (funOf_isScottContinuous_left (ofNat 0)))
  (theorem_1_3 (funOf_isScottContinuous b) (funOf_isScottContinuous_left (ofNat 1)))

theorem tensorR_app (a b u : Pomega) :
  funOf (tensorR a b) u =
    pairSeq (funOf a (funOf u (ofNat 0))) (funOf b (funOf u (ofNat 1))) :=
beta (tensorR_map_isScottContinuous a b) u

theorem plusR_map_isScottContinuous (a b : Pomega) :
  IsScottContinuous (fun u =>
    dcondSet (funOf u (ofNat 0))
      (pairSeq (ofNat 0) (funOf a (funOf u (ofNat 1))))
      (pairSeq (ofNat 1) (funOf b (funOf u (ofNat 1))))) :=
continuous_nary
  (fun y z => dcondSet_isScottContinuous_left y z)
  (fun x z => dcondSet_isScottContinuous_mid x z)
  (fun x y => dcondSet_isScottContinuous_right x y)
  (funOf_isScottContinuous_left (ofNat 0))
  (theorem_1_3 (pairSeq_isScottContinuous_right (ofNat 0))
    (theorem_1_3 (funOf_isScottContinuous a)
      (funOf_isScottContinuous_left (ofNat 1))))
  (theorem_1_3 (pairSeq_isScottContinuous_right (ofNat 1))
    (theorem_1_3 (funOf_isScottContinuous b)
      (funOf_isScottContinuous_left (ofNat 1))))

theorem plusR_app (a b u : Pomega) :

```

```

    funOf (plusR a b) u =
      dcondSet (funOf u (ofNat 0))
        (pairSeq (ofNat 0) (funOf a (funOf u (ofNat 1))))
        (pairSeq (ofNat 1) (funOf b (funOf u (ofNat 1)))) :=
    beta (plusR_map_isScottContinuous a b) u

theorem typed_pairSeq_tensorR (a b x y : Pomega) :
  typed (pairSeq x y) (tensorR a b) <-> typed x a /\ typed y b := by
  constructor
  * intro h
    have h' : pairSeq x y =
      pairSeq (funOf a x) (funOf b y) := by
      rw [typed, tensorR_app, pairSeq_app_zero, pairSeq_app_one] at h
      exact h
    exact pairSeq_inj h'
  * intro <hx, hy>
    rw [typed, tensorR_app, pairSeq_app_zero, pairSeq_app_one, <- hx, <- hy]

theorem plusR_typed_bot (a b : Pomega) : typed botElem (plusR a b) := by
  rw [typed, plusR_app, funOf_bot, dcondSet_bot]

theorem plusR_typed_inl {a b x : Pomega} (hx : typed x a) :
  typed (pairSeq (ofNat 0) x) (plusR a b) := by
  rw [typed, plusR_app, pairSeq_app_zero, pairSeq_app_one, dcondSet_ofNat_zero,
    <- hx]

theorem plusR_typed_inr {a b y : Pomega} (hy : typed y b) :
  typed (pairSeq (ofNat 1) y) (plusR a b) := by
  rw [typed, plusR_app, pairSeq_app_zero, pairSeq_app_one, dcondSet_ofNat_one,
    <- hy]

theorem plusR_app_bot (a b : Pomega) :
  funOf (plusR a b) botElem = botElem := by
  rw [plusR_app, funOf_bot, dcondSet_bot]

theorem plusR_app_top (a b : Pomega) :
  funOf (plusR a b) topElem = topElem := by
  rw [plusR_app, funOf_top, dcondSet_top]

theorem plusR_typed_top (a b : Pomega) : typed topElem (plusR a b) :=
  (plusR_app_top a b).symm

theorem plusR_isStrict (a b : Pomega) : IsStrict (plusR a b) :=
  plusR_app_bot a b

/-- **Scott 1976, Theorem 4.5 (i).** `a ? b` is a retract when `a` and `b` are. -/
theorem plusR_isRetract {a b : Pomega} (ha : IsRetract a) (hb : IsRetract b) :
  IsRetract (plusR a b) := by
  change plusR a b =
    graph (fun u => funOf (plusR a b) (funOf (plusR a b) u))
  apply graph_ext
  intro u
  rw [plusR_app a b u]
  rcases dcondSet_cases (funOf u (ofNat 0)) with h | h | h | h
  * rw [dcondSet_of_zero_not_pos h.1 h.2, plusR_app,
    pairSeq_app_zero, pairSeq_app_one, dcondSet_ofNat_zero, retract_app ha]
  * rw [dcondSet_of_pos_not_zero h.1 h.2, plusR_app,
    pairSeq_app_zero, pairSeq_app_one, dcondSet_ofNat_one, retract_app hb]
  * rw [dcondSet_of_mixed h.1 h.2, plusR_app_top]
  * rw [dcondSet_of_empty h.1 h.2, plusR_app_bot]

/-- **Scott 1976, Theorem 4.5 (ii).** Range of `a ? b`. -/
theorem plusR_typed_iff {a b u : Pomega} (ha : IsRetract a) (hb : IsRetract b) :

```

```

typed u (plusR a b) <->
  u = botElem \ / u = topElem \ /
    (exists x, u = pairSeq (ofNat 0) x /\ typed x a) \ /
    (exists y, u = pairSeq (ofNat 1) y /\ typed y b) := by
constructor
* intro hu
  have hu' : u =
    dcondSet (funOf u (ofNat 0))
      (pairSeq (ofNat 0) (funOf a (funOf u (ofNat 1))))
      (pairSeq (ofNat 1) (funOf b (funOf u (ofNat 1)))) := by
    simpa [typed, plusR_app] using hu
rcases dcondSet_cases (funOf u (ofNat 0)) with h | h | h | h
* refine Or.inr (Or.inr (Or.inl <funOf a (funOf u (ofNat 1)), ?_, ?_>))
* exact hu'.trans (dcondSet_of_zero_not_pos h.1 h.2)
* exact (retract_app ha (funOf u (ofNat 1))).symm
* refine Or.inr (Or.inr (Or.inr <funOf b (funOf u (ofNat 1)), ?_, ?_>))
* exact hu'.trans (dcondSet_of_pos_not_zero h.1 h.2)
* exact (retract_app hb (funOf u (ofNat 1))).symm
* refine Or.inr (Or.inl ?_)
  exact hu'.trans (dcondSet_of_mixed h.1 h.2)
* refine Or.inl ?_
  exact hu'.trans (dcondSet_of_empty h.1 h.2)
* intro h
  rcases h with hu | hu | <x, hx, hxt> | <y, hy, hyt>
* rw [hu]; exact plusR_typed_bot a b
* rw [hu]; exact plusR_typed_top a b
* rw [hx]; exact plusR_typed_inl hxt
* rw [hy]; exact plusR_typed_inr hyt

/-- **Scott 1976, Theorem 4.4.** Products of retracts are retracts. -/
theorem tensorR_isRetract {a b : Pomega} (ha : IsRetract a) (hb : IsRetract b) :
  IsRetract (tensorR a b) := by
  change tensorR a b =
    graph (fun u => funOf (tensorR a b) (funOf (tensorR a b) u))
  apply graph_ext
  intro u
  rw [tensorR_app, tensorR_app, pairSeq_app_zero, pairSeq_app_one,
    retract_app ha, retract_app hb]

/-- **Scott 1976, (4.12).** `(a ? b) comp (a' ? b') = (a comp a') ? (b comp b')`. -/
theorem eq_4_12 (a b a' b' : Pomega) :
  comp (tensorR a b) (tensorR a' b') = tensorR (comp a a') (comp b b') := by
  apply graph_ext
  intro u
  rw [tensorR_app, tensorR_app, pairSeq_app_zero, pairSeq_app_one]
  simp only [comp_app]

/-- **Scott 1976, Theorem 4.4 (ii).** `u : a ? b` iff `u = <u_0, u_1>`
with `u_0 : a` and `u_1 : b`. -/
theorem theorem_4_4_typed {a b u : Pomega} :
  typed u (tensorR a b) <->
    u = pairSeq (funOf u (ofNat 0)) (funOf u (ofNat 1)) /\
      typed (funOf u (ofNat 0)) a /\ typed (funOf u (ofNat 1)) b := by
constructor
* intro hu
  have hpair : u =
    pairSeq (funOf a (funOf u (ofNat 0)))
      (funOf b (funOf u (ofNat 1))) := by
    simpa [typed, tensorR_app] using hu
  have h0 : funOf u (ofNat 0) = funOf a (funOf u (ofNat 0)) := by
    have := congrArg (fun w => funOf w (ofNat 0)) hpair
    simpa [pairSeq_app_zero] using this
  have h1 : funOf u (ofNat 1) = funOf b (funOf u (ofNat 1)) := by

```

```

      have := congrArg (fun w => funOf w (ofNat 1)) hpair
      simp [pairSeq_app_one] using this
      refine <hpair.trans (congr (congrArg pairSeq h0.symm) h1.symm), h0, h1>
* intro <hpair, ha, hb>
      change u = funOf (tensorR a b) u
      rw [tensorR_app, <- ha, <- hb, <- hpair]

theorem pairSeq_bot : pairSeq botElem botElem = botElem := by
  have hbody : (fun z => condSet z botElem (condSet (predSet z) botElem botElem)) =
    fun _ => botElem := by
    funext z
    ext n
    simp [condSet, botElem]
  simp [pairSeq, seq2, hbody] using graph_const_bot

/-- **Scott 1976, Theorem 4.4 (i), strictness.** -/
theorem tensorR_isStrict {a b : Pomega} (ha : IsStrict a) (hb : IsStrict b) :
  IsStrict (tensorR a b) := by
  change funOf (tensorR a b) botElem = botElem
  rw [tensorR_app, funOf_bot, funOf_bot, ha, hb, pairSeq_bot]

/-- **Scott 1976, Theorem 4.4 (iii).** `?` preserves `sqsub`. -/
theorem tensorR_retractLe {a b a' b' : Pomega}
  (hab : retractLe a a') (hbb : retractLe b b') :
  retractLe (tensorR a b) (tensorR a' b') := by
  constructor
* have h : tensorR (comp a a') (comp b b') = tensorR a b := by
  rw [ <- hab.1, <- hbb.1]
  exact ((eq_4_12 a b a' b').trans h).symm
* have h : tensorR (comp a' a) (comp b' b) = tensorR a b := by
  rw [ <- hab.2, <- hbb.2]
  exact ((eq_4_12 a' b' a b).trans h).symm

theorem diagC_app (u : Pomega) : funOf diagC u = pairSeq u u :=
  beta (continuous_on_diag
    pairSeq_isScottContinuous_left pairSeq_isScottContinuous_right) u

/-- **Scott 1976, (4.17).** `fst comp (a ? b) : (a ? b) comp -> a`. -/
theorem eq_4_17 {a b : Pomega} (ha : IsRetract a) (hb : IsRetract b) :
  typed (comp fstC (tensorR a b)) (arrowR (tensorR a b) a) := by
  change comp fstC (tensorR a b) =
    funOf (arrowR (tensorR a b) a) (comp fstC (tensorR a b))
  rw [arrowR_app]
  apply graph_ext
  intro u
  have hab := tensorR_isRetract ha hb
  simp only [comp_app, fstC_app, retract_app hab]
  rw [tensorR_app, pairSeq_app_zero, retract_app ha]

/-- **Scott 1976, (4.18).** `snd comp (a ? b) : (a ? b) comp -> b`. -/
theorem eq_4_18 {a b : Pomega} (ha : IsRetract a) (hb : IsRetract b) :
  typed (comp sndC (tensorR a b)) (arrowR (tensorR a b) b) := by
  change comp sndC (tensorR a b) =
    funOf (arrowR (tensorR a b) b) (comp sndC (tensorR a b))
  rw [arrowR_app]
  apply graph_ext
  intro u
  have hab := tensorR_isRetract ha hb
  simp only [comp_app, sndC_app, retract_app hab]
  rw [tensorR_app, pairSeq_app_one, retract_app hb]

/-- **Scott 1976, (4.19).** `diag comp a : a comp -> a ? a`. -/
theorem eq_4_19 {a : Pomega} (ha : IsRetract a) :

```

```

    typed (comp diagC a) (arrowR a (tensorR a a)) := by
change comp diagC a = funOf (arrowR a (tensorR a a)) (comp diagC a)
rw [arrowR_app]
apply graph_ext
intro u
simp only [comp_app, diagC_app, retract_app ha]
rw [tensorR_app, pairSeq_app_zero, pairSeq_app_one, retract_app ha]

/-- **Scott 1976, (4.20).** `fst comp (f ? f') = f comp fst`. -/
theorem eq_4_20 (f f' : Pomega) :
  comp fstC (tensorR f f') = comp f fstC := by
  simp only [comp]
  apply graph_ext
  intro u
  rw [fstC_app, tensorR_app, pairSeq_app_zero, fstC_app]

/-- **Scott 1976, (4.21).** `snd comp (f ? f') = f' comp snd`. -/
theorem eq_4_21 (f f' : Pomega) :
  comp sndC (tensorR f f') = comp f' sndC := by
  simp only [comp]
  apply graph_ext
  intro u
  rw [sndC_app, tensorR_app, pairSeq_app_one, sndC_app]

/-- **Scott 1976, Theorem 4.4 (iv).** `~` is a functor on maps. -/
theorem tensorR_functor {a b a' b' f f' : Pomega}
  (_ha : IsRetract a) (_hb : IsRetract b)
  (_ha' : IsRetract a') (_hb' : IsRetract b')
  (hf : typed f (arrowR a b)) (hf' : typed f' (arrowR a' b')) :
  typed (tensorR f f') (arrowR (tensorR a a') (tensorR b b')) := by
change tensorR f f' =
  funOf (arrowR (tensorR a a') (tensorR b b')) (tensorR f f')
rw [arrowR_app]
have h := eq_4_12 b b' f f'
have h' := eq_4_12 f f' a a'
have hf1 := typed_of_arrowR hf
have hf2 := typed_of_arrowR hf'
apply Eq.symm
calc
  comp (tensorR b b') (comp (tensorR f f') (tensorR a a'))
    = comp (tensorR b b') (tensorR (comp f a) (comp f' a')) := by
    rw [eq_4_12]
  _ = tensorR (comp b (comp f a)) (comp b' (comp f' a')) := eq_4_12 _ _ _ _
  _ = tensorR f f' := by
    rw [← hf1, ← hf2]

/-- **Scott 1976, (4.26).** Left injection. -/
def inleftC : Pomega := graph (fun x => pairSeq (ofNat 0) x)

/-- **Scott 1976, (4.27).** Right injection. -/
def inrightC : Pomega := graph (fun x => pairSeq (ofNat 1) x)

theorem inleftC_app (x : Pomega) :
  funOf inleftC x = pairSeq (ofNat 0) x :=
  beta (pairSeq_isScottContinuous_right (ofNat 0)) x

theorem inrightC_app (x : Pomega) :
  funOf inrightC x = pairSeq (ofNat 1) x :=
  beta (pairSeq_isScottContinuous_right (ofNat 1)) x

/-- **Scott 1976, (4.32).** `(a ? b) comp inleft comp a : a comp -> (a ? b)`. -/
theorem eq_4_32 {a b : Pomega} (ha : IsRetract a) :
  typed (comp (plusR a b) (comp inleftC a)) (arrowR a (plusR a b)) := by

```



```

change comp (plusR a b) (comp inleftC a) =
  funOf (arrowR a (plusR a b)) (comp (plusR a b) (comp inleftC a))
rw [arrowR_app]
apply graph_ext
intro x
simp only [comp_app, inleftC_app, retract_app ha]
rw [plusR_app, plusR_app, pairSeq_app_zero, pairSeq_app_one,
  dcondSet_ofNat_zero, retract_app ha]
rw [pairSeq_app_zero, pairSeq_app_one, dcondSet_ofNat_zero, retract_app ha]

/-- **Scott 1976, (4.33).** ` (a ? b) comp inright comp b : b comp -> (a ? b) `.-/
theorem eq_4_33 {a b : Pomega} (hb : IsRetract b) :
  typed (comp (plusR a b) (comp inrightC b)) (arrowR b (plusR a b)) := by
change comp (plusR a b) (comp inrightC b) =
  funOf (arrowR b (plusR a b)) (comp (plusR a b) (comp inrightC b))
rw [arrowR_app]
apply graph_ext
intro x
simp only [comp_app, inrightC_app, retract_app hb]
rw [plusR_app, plusR_app, pairSeq_app_zero, pairSeq_app_one,
  dcondSet_ofNat_one, retract_app hb]
rw [pairSeq_app_zero, pairSeq_app_one, dcondSet_ofNat_one, retract_app hb]

theorem evalC_isScottContinuous :
  IsScottContinuous (fun u => funOf (funOf u (ofNat 0)) (funOf u (ofNat 1))) :=
continuous_tuple
  (fun y => funOf_isScottContinuous_left y)
  (fun t => funOf_isScottContinuous t)
  (funOf_isScottContinuous_left (ofNat 0))
  (funOf_isScottContinuous_left (ofNat 1))

theorem evalC_app (u : Pomega) :
  funOf evalC u = funOf (funOf u (ofNat 0)) (funOf u (ofNat 1)) :=
beta evalC_isScottContinuous u

theorem curry_body_isScottContinuous_y (u x : Pomega) :
  IsScottContinuous (fun y => funOf u (pairSeq x y)) :=
theorem_1_3 (funOf_isScottContinuous u) (pairSeq_isScottContinuous_right x)

theorem curry_mid_isScottContinuous (u : Pomega) :
  IsScottContinuous (fun x => graph (fun y => funOf u (pairSeq x y))) :=
graph_const_isScottContinuous
  (fun x y => funOf u (pairSeq x y))
  (fun y => theorem_1_3 (funOf_isScottContinuous u)
    (pairSeq_isScottContinuous_left y))

theorem curryC_isScottContinuous :
  IsScottContinuous (fun u =>
    graph (fun x => graph (fun y => funOf u (pairSeq x y)))) :=
graph_const_isScottContinuous
  (fun u x => graph (fun y => funOf u (pairSeq x y)))
  (fun x =>
    graph_const_isScottContinuous
      (fun u y => funOf u (pairSeq x y))
      (fun y => funOf_isScottContinuous_left (pairSeq x y)))

theorem curryC_app (u : Pomega) :
  funOf curryC u = graph (fun x => graph (fun y => funOf u (pairSeq x y))) :=
beta curryC_isScottContinuous u

theorem curryC_app2 (u x : Pomega) :
  funOf (funOf curryC u) x = graph (fun y => funOf u (pairSeq x y)) := by
rw [curryC_app]

```

```

exact beta (curry_mid_isScottContinuous u) x

theorem curryC_app3 (u x y : Pomega) :
  funOf (funOf (funOf curryC u) x) y = funOf u (pairSeq x y) := by
  rw [curryC_app2]
  exact beta (curry_body_isScottContinuous_y u x) y

/-- **Scott 1976, (4.24).** `eval comp ((b comp -> c) ? b) : ((b comp -> c) ? b) comp
-> c`. -/
theorem eq_4_24 {b c : Pomega} (hb : IsRetract b) (hc : IsRetract c) :
  typed (comp evalC (tensorR (arrowR b c) b))
    (arrowR (tensorR (arrowR b c) b) c) := by
  change comp evalC (tensorR (arrowR b c) b) =
    funOf (arrowR (tensorR (arrowR b c) b) c)
      (comp evalC (tensorR (arrowR b c) b))
  rw [arrowR_app]
  apply graph_ext
  intro u
  have hL :
    funOf evalC (funOf (tensorR (arrowR b c) b) u) =
      funOf c (funOf (funOf u (ofNat 0)) (funOf b (funOf u (ofNat 1)))) := by
  rw [evalC_app, tensorR_app, pairSeq_app_zero, pairSeq_app_one, arrowR_app]
  simp only [comp_app]
  rw [retract_app hb]
  have hR :
    funOf c (funOf evalC (funOf (tensorR (arrowR b c) b)
      (funOf (tensorR (arrowR b c) b) u))) =
      funOf c (funOf (funOf u (ofNat 0)) (funOf b (funOf u (ofNat 1)))) := by
  have hten := retract_app (tensorR_isRetract (arrowR_isRetract hb hc) hb) u
  rw [hten, hL, retract_app hc]
  simp only [comp_app]
  exact hL.trans hR.symm

theorem graph_funOf_ext {f g : Pomega}
  (hf : f = graph (fun x => funOf f x))
  (hg : g = graph (fun x => funOf g x))
  (h : forall x, funOf f x = funOf g x) : f = g := by
  rw [hf, hg]
  exact graph_ext h

theorem typed_isGraph {a b f : Pomega} (hf : typed f (arrowR a b)) :
  f = graph (fun x => funOf f x) := by
  have hf' := typed_of_arrowR hf
  apply Eq.trans hf'
  apply graph_ext
  intro x

```

Lean 4 source (lines 801–1200)

```

have : funOf f x = funOf b (funOf f (funOf a x)) := by
  have h1 : funOf f x = funOf (comp b (comp f a)) x :=
    congrArg (fun w => funOf w x) hf'
  rw [h1, comp_app, comp_app]
  rw [comp_app, this]

theorem comp_isGraph (u v : Pomega) :
  comp u v = graph (fun x => funOf (comp u v) x) := by
  apply graph_ext
  intro x
  exact (comp_app u v x).symm

/-- **Scott 1976, after (4.25).** `eval comp (curry(f) ? b) = f`. -/
theorem eval_curry {a b c f : Pomega}
  (_ha : IsRetract a) (hb : IsRetract b) (_hc : IsRetract c)

```

```

    (hf : typed f (arrowR (tensorR a b) c)) :
    comp evalC (tensorR (funOf curryC f) b) = f := by
have hf' := typed_of_arrowR hf
apply graph_funOf_ext (comp_isGraph _ _) (typed_isGraph hf)
intro u
simp only [comp_app]
rw [evalC_app, tensorR_app, pairSeq_app_zero, pairSeq_app_one, curryC_app3]
have hfapp :
  funOf f (pairSeq (funOf u (ofNat 0)) (funOf b (funOf u (ofNat 1)))) =
  funOf c (funOf f (funOf (tensorR a b)
    (pairSeq (funOf u (ofNat 0)) (funOf b (funOf u (ofNat 1)))))) := by
  have := congrArg (fun w =>
    funOf w (pairSeq (funOf u (ofNat 0)) (funOf b (funOf u (ofNat 1)))) hf'
  simp [comp_app] using this
have hf_u : funOf f u = funOf c (funOf f (funOf (tensorR a b) u)) := by
  have := congrArg (fun w => funOf w u) hf'
  simp [comp_app] using this
rw [hfapp, tensorR_app, pairSeq_app_zero, pairSeq_app_one, retract_app hb]
rw [hf_u, tensorR_app]

/-- **Scott 1976, (4.25).**
`curry comp ((a ? b) comp -> c) : ((a ? b) comp -> c) comp -> (a comp -> (b comp
-> c))`. -/
theorem eq_4_25 {a b c : Pomega}
  (ha : IsRetract a) (hb : IsRetract b) (hc : IsRetract c) :
  typed (comp curryC (arrowR (tensorR a b) c))
  (arrowR (arrowR (tensorR a b) c) (arrowR a (arrowR b c))) := by
change comp curryC (arrowR (tensorR a b) c) =
  funOf (arrowR (arrowR (tensorR a b) c) (arrowR a (arrowR b c)))
  (comp curryC (arrowR (tensorR a b) c))
rw [arrowR_app]
have harr := arrowR_isRetract (tensorR_isRetract ha hb) hc
apply graph_ext
intro u
simp only [comp_app]
rw [retract_app harr]
have hL :
  funOf curryC (funOf (arrowR (tensorR a b) c) u) =
  graph (fun x => graph (fun y =>
    funOf c (funOf u (pairSeq (funOf a x) (funOf b y))))) := by
  rw [curryC_app]
  apply graph_ext
  intro x
  apply graph_ext
  intro y
  rw [arrowR_app]
  simp only [comp_app]
  rw [tensorR_app, pairSeq_app_zero, pairSeq_app_one]
have hR :
  funOf (arrowR a (arrowR b c))
  (funOf curryC (funOf (arrowR (tensorR a b) c) u)) =
  graph (fun x => graph (fun y =>
    funOf c (funOf u (pairSeq (funOf a x) (funOf b y))))) := by
  rw [arrowR_app, hL]
  apply graph_ext
  intro x
  simp only [comp_app]
have hmid :
  funOf (graph (fun x => graph (fun y =>
    funOf c (funOf u (pairSeq (funOf a x) (funOf b y))))) (funOf a x) =
  graph (fun y =>
    funOf c (funOf u (pairSeq (funOf a (funOf a x)) (funOf b y)))) :=
  beta (graph_const_isScottContinuous

```

```

      (fun x y => funOf c (funOf u (pairSeq (funOf a x) (funOf b y))))
      (fun y => theorem_1_3 (funOf_isScottContinuous c)
        (theorem_1_3 (funOf_isScottContinuous u)
          (theorem_1_3 (f := fun x => pairSeq x (funOf b y))
            (g := fun x => funOf a x)
            (pairSeq_isScottContinuous_left (funOf b y))
            (funOf_isScottContinuous a)))) (funOf a x)
    rw [hmid, retract_app ha, arrowR_app]
    apply graph_ext
    intro y
    simp only [comp_app]
    have hbeta :
      funOf (graph (fun y =>
        funOf c (funOf u (pairSeq (funOf a x) (funOf b y)))) (funOf b y) =
        funOf c (funOf u (pairSeq (funOf a x) (funOf b (funOf b y)))) :=
      beta (theorem_1_3 (funOf_isScottContinuous c)
        (theorem_1_3 (funOf_isScottContinuous u)
          (theorem_1_3 (f := fun y => pairSeq (funOf a x) y)
            (g := fun y => funOf b y)
            (pairSeq_isScottContinuous_right (funOf a x))
            (funOf_isScottContinuous b)))) (funOf b y)
    rw [hbeta, retract_app hb, retract_app hc]
    exact hL.trans hR.symm

/-- **Scott 1976, (4.28).** Left projection of a tagged sum. -/
def outleftC : Pomega :=
  graph (fun u => condSet (funOf u (ofNat 0)) (funOf u (ofNat 1)) botElem)

/-- **Scott 1976, (4.29).** Right projection of a tagged sum. -/
def outrightC : Pomega :=
  graph (fun u => condSet (funOf u (ofNat 0)) botElem (funOf u (ofNat 1)))

/-- **Scott 1976, (4.30).** Tag of a summand; same combinator as `fst`. -/
def whichC : Pomega := fstC

/-- **Scott 1976, (4.31).** Untagged payload; same combinator as `snd`. -/
def outC : Pomega := sndC

theorem outleftC_isScottContinuous :
  IsScottContinuous (fun u =>
    condSet (funOf u (ofNat 0)) (funOf u (ofNat 1)) botElem) :=
  continuous_tuple
    (fun y => condSet_isScottContinuous_left y botElem)
    (fun tes => condSet_isScottContinuous_mid tes botElem)
    (funOf_isScottContinuous_left (ofNat 0))
    (funOf_isScottContinuous_left (ofNat 1))

theorem outrightC_isScottContinuous :
  IsScottContinuous (fun u =>
    condSet (funOf u (ofNat 0)) botElem (funOf u (ofNat 1))) :=
  continuous_tuple
    (fun y => condSet_isScottContinuous_left botElem y)
    (fun tes => condSet_isScottContinuous_right tes botElem)
    (funOf_isScottContinuous_left (ofNat 0))
    (funOf_isScottContinuous_left (ofNat 1))

theorem outleftC_app (u : Pomega) :
  funOf outleftC u = condSet (funOf u (ofNat 0)) (funOf u (ofNat 1)) botElem :=
  beta outleftC_isScottContinuous u

theorem outrightC_app (u : Pomega) :
  funOf outrightC u = condSet (funOf u (ofNat 0)) botElem (funOf u (ofNat 1)) :=
  beta outrightC_isScottContinuous u

```

```

theorem funOf_condSet (z x y w : Pomega) :
  funOf (condSet z x y) w = condSet z (funOf x w) (funOf y w) := by
  ext m
  constructor
  * intro <n, hn, hp>
    rcases hp with <hx, h0> | <hy, ht>
    * exact Or.inl <<n, hn, hx>, h0>
    * exact Or.inr <<n, hn, hy>, ht>
  * intro hm
    rcases hm with <<n, hn, hx>, h0> | <<n, hn, hy>, ht>
    * exact <n, hn, Or.inl <hx, h0>>
    * exact <n, hn, Or.inr <hy, ht>>

theorem funOf_dcondSet (z x y w : Pomega) :
  funOf (dcondSet z x y) w = dcondSet z (funOf x w) (funOf y w) := by
  simp only [dcondSet]
  rw [funOf_condSet, funOf_condSet, funOf_condSet, funOf_top]

theorem plusR_fst (a b u : Pomega) :
  funOf (funOf (plusR a b) u) (ofNat 0) =
    dcondSet (funOf u (ofNat 0)) (ofNat 0) (ofNat 1) := by
  rw [plusR_app, funOf_dcondSet, pairSeq_app_zero, pairSeq_app_zero]

theorem plusR_snd (a b u : Pomega) :
  funOf (funOf (plusR a b) u) (ofNat 1) =
    dcondSet (funOf u (ofNat 0))
      (funOf a (funOf u (ofNat 1))) (funOf b (funOf u (ofNat 1))) := by
  rw [plusR_app, funOf_dcondSet, pairSeq_app_one, pairSeq_app_one]

/-- **Scott 1976, (4.36).** `which comp (a ? b) : (a ? b) comp -> bool`. -/
theorem eq_4_36 (a b : Pomega) :
  typed (comp whichC (plusR a b)) (arrowR (plusR a b) boolR) := by
  change comp whichC (plusR a b) =
    funOf (arrowR (plusR a b) boolR) (comp whichC (plusR a b))
  rw [arrowR_app]
  apply graph_ext
  intro u
  simp only [comp_app, whichC, fstC_app]
  rw [plusR_fst, boolR_app, plusR_fst, plusR_fst, dcondSet_bool_idem, dcondSet_bool_idem]

/-- **Scott 1976, (4.13).** `(a ? b) comp (a' ? b') = (a comp a') ? (b comp b')`. -/
theorem eq_4_13 (a b a' b' : Pomega) :
  comp (plusR a b) (plusR a' b') = plusR (comp a a') (comp b b') := by
  apply graph_ext
  intro u
  rw [plusR_app a' b' u]
  rcases dcondSet_cases (funOf u (ofNat 0)) with h | h | h | h
  * rw [dcondSet_of_zero_not_pos h.1 h.2, plusR_app,
    pairSeq_app_zero, pairSeq_app_one, dcondSet_ofNat_zero,
    dcondSet_of_zero_not_pos h.1 h.2]
    simp only [comp_app]
  * rw [dcondSet_of_pos_not_zero h.1 h.2, plusR_app,
    pairSeq_app_zero, pairSeq_app_one, dcondSet_ofNat_one,
    dcondSet_of_pos_not_zero h.1 h.2]
    simp only [comp_app]
  * rw [dcondSet_of_mixed h.1 h.2, plusR_app_top, dcondSet_of_mixed h.1 h.2]
  * rw [dcondSet_of_empty h.1 h.2, plusR_app_bot, dcondSet_of_empty h.1 h.2]

/-- **Scott 1976, Theorem 4.5 (iii).** `?` preserves `sqsub`. -/
theorem plusR_retractLe {a b a' b' : Pomega}
  (hab : retractLe a a') (hbb : retractLe b b') :
  retractLe (plusR a b) (plusR a' b') := by

```

```

constructor
* have h : plusR (comp a a') (comp b b') = plusR a b := by
  rw [ <- hab.1, <- hbb.1]
  exact ((eq_4_13 a b a' b').trans h).symm
* have h : plusR (comp a' a) (comp b' b) = plusR a b := by
  rw [ <- hab.2, <- hbb.2]
  exact ((eq_4_13 a' b' a b).trans h).symm

/-- **Scott 1976, Theorem 4.5 (iv).** `?` is a covariant functor. -/
theorem plusR_functor {a b a' b' f f' : Pomega}
  (_ha : IsRetract a) (_hb : IsRetract b)
  (_ha' : IsRetract a') (_hb' : IsRetract b')
  (hf : typed f (arrowR a b)) (hf' : typed f' (arrowR a' b')) :
  typed (plusR f f') (arrowR (plusR a a') (plusR b b')) := by
change plusR f f' =
  funOf (arrowR (plusR a a') (plusR b b')) (plusR f f')
rw [arrowR_app]
have hf1 := typed_of_arrowR hf
have hf2 := typed_of_arrowR hf'
apply Eq.symm
calc
  comp (plusR b b') (comp (plusR f f') (plusR a a'))
    = comp (plusR b b') (plusR (comp f a) (comp f' a')) := by
      rw [eq_4_13]
  _ = plusR (comp b (comp f a)) (comp b' (comp f' a')) := eq_4_13 _ _ _
  _ = plusR f f' := by
      rw [ <- hf1, <- hf2]

/-- **Scott 1976, Theorem 4.5 (The sum theorem).** -/
theorem theorem_4_5_sum {a b : Pomega} (ha : IsRetract a) (hb : IsRetract b) :
  IsRetract (plusR a b) /\ IsStrict (plusR a b) /\
    (forall u, typed u (plusR a b) <=>
      u = botElem \/ u = topElem \/
        (exists x, u = pairSeq (ofNat 0) x /\ typed x a) /\
        (exists y, u = pairSeq (ofNat 1) y /\ typed y b)) :=
  <plusR_isRetract ha hb, plusR_isStrict a b, fun u => plusR_typed_iff ha hb>

/-- **Scott 1976, (4.34).** `a` comp outleft comp (a ? b) : (a ? b) comp -> a`. -/
theorem eq_4_34 {a b : Pomega} (ha : IsRetract a) (hb : IsRetract b) :
  typed (comp a (comp outleftC (plusR a b))) (arrowR (plusR a b) a) := by
change comp a (comp outleftC (plusR a b)) =
  funOf (arrowR (plusR a b) a) (comp a (comp outleftC (plusR a b)))
rw [arrowR_app]
apply graph_ext
intro u
simp only [comp_app]
rw [retract_app (plusR_isRetract ha hb), retract_app ha]

/-- **Scott 1976, (4.35).** `b` comp outright comp (a ? b) : (a ? b) comp -> b`. -/
theorem eq_4_35 {a b : Pomega} (ha : IsRetract a) (hb : IsRetract b) :
  typed (comp b (comp outrightC (plusR a b))) (arrowR (plusR a b) b) := by
change comp b (comp outrightC (plusR a b)) =
  funOf (arrowR (plusR a b) b) (comp b (comp outrightC (plusR a b)))
rw [arrowR_app]
apply graph_ext
intro u
simp only [comp_app]
rw [retract_app (plusR_isRetract ha hb), retract_app hb]

/-- **Scott 1976, (4.37).** `a` comp out comp (a ? a) : (a ? a) comp -> a`. -/
theorem eq_4_37 {a : Pomega} (ha : IsRetract a) :
  typed (comp a (comp outC (plusR a a))) (arrowR (plusR a a) a) := by
change comp a (comp outC (plusR a a)) =

```

```

    funOf (arrowR (plusR a a) a) (comp a (comp outC (plusR a a)))
  rw [arrowR_app]
  apply graph_ext
  intro u
  simp only [comp_app]
  rw [retract_app (plusR_isRetract ha ha), retract_app ha]

/-- **Scott 1976, Theorem 4.4.** The product mediator
`h = (f ? g) comp diag comp c`. -/
def pairMed (f g c : Pomega) : Pomega :=
  comp (tensorR f g) (comp diagC c)

/-- **Scott 1976, Theorem 4.4.** Existence of the product mediator. -/
theorem theorem_4_4_med {a b c f g : Pomega}
  (_ha : IsRetract a) (_hb : IsRetract b) (hc : IsRetract c)
  (hf : typed f (arrowR c a)) (hg : typed g (arrowR c b)) :
  typed (pairMed f g c) (arrowR c (tensorR a b)) /\
  comp fstC (pairMed f g c) = f /\
  comp sndC (pairMed f g c) = g := by
  have hf' := typed_of_arrowR hf
  have hg' := typed_of_arrowR hg
  refine <?_, ?_, ?_>
  * change pairMed f g c =
      funOf (arrowR c (tensorR a b)) (pairMed f g c)
  rw [arrowR_app, pairMed]
  apply graph_ext
  intro x
  have hfxc : funOf f (funOf c x) =
    funOf a (funOf f (funOf c x)) := by
    have := congrArg (fun w => funOf w (funOf c x)) hf'
    simpa [comp_app, retract_app hc] using this
  have hgxc : funOf g (funOf c x) =
    funOf b (funOf g (funOf c x)) := by
    have := congrArg (fun w => funOf w (funOf c x)) hg'
    simpa [comp_app, retract_app hc] using this
  have hL : funOf (tensorR f g) (funOf diagC (funOf c x)) =
    pairSeq (funOf f (funOf c x)) (funOf g (funOf c x)) := by
    rw [diagC_app, tensorR_app, pairSeq_app_zero, pairSeq_app_one]
  have hR : funOf (tensorR a b)
    (funOf (tensorR f g) (funOf diagC (funOf c (funOf c x)))) =
    pairSeq (funOf a (funOf f (funOf c x)))
      (funOf b (funOf g (funOf c x))) := by
    rw [retract_app hc, diagC_app]
  have hinter :
    funOf (tensorR f g) (pairSeq (funOf c x) (funOf c x)) =
    pairSeq (funOf f (funOf c x)) (funOf g (funOf c x)) := by
    rw [tensorR_app, pairSeq_app_zero, pairSeq_app_one]
    rw [hinter, tensorR_app, pairSeq_app_zero, pairSeq_app_one]
  simp only [comp_app]
  rw [hL, hR]
  exact congr (congrArg pairSeq hfxc) hgxc
  * apply graph_funOf_ext (comp_isGraph _ _) (typed_isGraph hf)
  intro x
  simp only [comp_app, pairMed, fstC_app, diagC_app]
  rw [tensorR_app, pairSeq_app_zero, pairSeq_app_zero]
  have := congrArg (fun w => funOf w x) (typed_arrowR_restrict hc hf)
  simpa [comp_app] using this.symm
  * apply graph_funOf_ext (comp_isGraph _ _) (typed_isGraph hg)
  intro x
  simp only [comp_app, pairMed, sndC_app, diagC_app]
  rw [tensorR_app, pairSeq_app_one, pairSeq_app_one]
  have := congrArg (fun w => funOf w x) (typed_arrowR_restrict hc hg)
  simpa [comp_app] using this.symm

```

```

/-- **Scott 1976, Theorem 4.4.** The product mediator is unique. -/
theorem theorem_4_4_med_unique {a b c f g h : Pomega}
  (ha : IsRetract a) (hb : IsRetract b) (hc : IsRetract c)
  (hf : typed f (arrowR c a)) (hg : typed g (arrowR c b))
  (hh : typed h (arrowR c (tensorR a b)))
  (hfst : comp fstC h = f) (hsnd : comp sndC h = g) :
  h = pairMed f g c := by
  apply graph_funOf_ext (typed_isGraph hh)
    (typed_isGraph (theorem_4_4_med ha hb hc hf hg).1)
  intro x
  have hh' := typed_of_arrowR hh
  have hx : funOf h x =
    funOf (tensorR a b) (funOf h (funOf c x)) := by
    have := congrArg (fun w => funOf w x) hh'
    simpa [comp_app] using this
  have h0 : funOf (funOf h x) (ofNat 0) = funOf f x := by
    have := congrArg (fun w => funOf w x) hfst
    simpa [comp_app, fstC_app] using this
  have h1 : funOf (funOf h x) (ofNat 1) = funOf g x := by
    have := congrArg (fun w => funOf w x) hsnd
    simpa [comp_app, sndC_app] using this
  rw [hx, tensorR_app]
  have hfx : funOf a (funOf (funOf h (funOf c x)) (ofNat 0)) = funOf f x := by
    have h0c : funOf (funOf h (funOf c x)) (ofNat 0) = funOf f (funOf c x) := by
      have := congrArg (fun w => funOf w (funOf c x)) hfst
      simpa [comp_app, fstC_app] using this
    rw [h0c]
    have := congrArg (fun w => funOf w x) (typed_of_arrowR hf)
    simpa [comp_app] using this.symm
  have hgx : funOf b (funOf (funOf h (funOf c x)) (ofNat 1)) = funOf g x := by
    have h1c : funOf (funOf h (funOf c x)) (ofNat 1) = funOf g (funOf c x) := by
      have := congrArg (fun w => funOf w (funOf c x)) hsnd
      simpa [comp_app, sndC_app] using this
    rw [h1c]
    have := congrArg (fun w => funOf w x) (typed_of_arrowR hg)
    simpa [comp_app] using this.symm
  rw [hfx, hgx]
  simp only [pairMed, comp_app, diagC_app, tensorR_app, pairSeq_app_zero,
    pairSeq_app_one]
  have hfr : funOf f (funOf c x) = funOf f x := by
    have := congrArg (fun w => funOf w x) (typed_arrowR_restrict hc hf)
    simpa [comp_app] using this.symm
  have hgr : funOf g (funOf c x) = funOf g x := by
    have := congrArg (fun w => funOf w x) (typed_arrowR_restrict hc hg)
    simpa [comp_app] using this.symm
  rw [hfr, hgr]

theorem condSet_same_bot (x : Pomega) : condSet botElem x x = botElem :=
  condSet_bot x x

theorem condSet_same_of_mem {z x : Pomega} {k : Nat} (hk : k in z) :
  condSet z x x = x := by
  ext n
  constructor
  * intro hn
    rcases hn with <hnx, _> | <hnx, _>
    * exact hnx
    * exact hnx
  * intro hnx
    cases k with
    | zero => exact Or.inl <hnx, hk>
    | succ t => exact Or.inr <hnx, t, hk>

```



```

theorem theorem_7_2_ii_of_typed {a b f : Pomega} (hf : typed f (arrowR a b)) :
  (arrowE (Ea a) (Ea b)).mem f := by
  have hf' : f = comp b (comp f a) := by
    simp [typed, arrowR_app] using hf
  have hgraph : f = graph (fun x => funOf f x) := by
    apply Eq.trans hf'
    apply graph_ext

```

Lean 4 source (lines 1201–1600)

```

  intro x
  have : funOf f x = funOf b (funOf f (funOf a x)) := by
    have h1 : funOf f x = funOf (comp b (comp f a)) x :=
      congrArg (fun w => funOf w x) hf'
    rw [h1, comp_app, comp_app]
  rw [comp_app, this]
  refine <hgraph, hgraph, ?_>
  intro x y hxy
  rcases hxy with <hx, hy, rfl>
  have hfx : typed (funOf f x) b := theorem_4_3_ii hf hx
  exact <hfx, hfx, rfl>

/-- **Scott 1976, Theorem 7.2 (ii).** Maps in `E_{a comp -> b}` are graphs of
maps from `a` to `b`, corresponding to `E_a -> E_b`. -/
theorem theorem_7_2_ii {a b : Pomega} (ha : IsRetract a) (hb : IsRetract b)
  (f g : Pomega) :
  (typed f (arrowR a b) -> (arrowE (Ea a) (Ea b)).mem f) /\
  ((arrowE (Ea a) (Ea b)).rel f g ->
    (Ea (arrowR a b)).rel (funOf (arrowR a b) f) (funOf (arrowR a b) g)) /\
  ((Ea (arrowR a b)).rel f g -> (arrowE (Ea a) (Ea b)).rel f g) := by
  refine <fun hf => theorem_7_2_ii_of_typed hf, ?_, ?_>
  * intro hfg
  rcases hfg with <hgraph, hggraph, hpres>
  have hftyped : typed (funOf (arrowR a b) f) (arrowR a b) :=
    (retract_app (arrowR_isRetract ha hb) f).symm
  have hgtyped : typed (funOf (arrowR a b) g) (arrowR a b) :=
    (retract_app (arrowR_isRetract ha hb) g).symm
  refine <hftyped, hgtyped, ?_>
  rw [arrowR_app, arrowR_app]
  apply graph_ext
  intro x
  simp only [comp_app]
  have hax : typed (funOf a x) a := (retract_app ha x).symm
  have hsame := hpres (funOf a x) (funOf a x) <hax, hax, rfl>
  have hfeq : funOf f (funOf a x) = funOf g (funOf a x) := hsame.2.2
  have hfb : typed (funOf f (funOf a x)) b := hsame.1
  have hgb : typed (funOf g (funOf a x)) b := hsame.2.1
  rw [← hfb, ← hgb, hfeq]
  * intro hfg
  rcases hfg with <hf, hg, rfl>
  have hmem := theorem_7_2_ii_of_typed hf
  exact <hmem.1, hmem.1, hmem.2.2>

/-- **Scott 1976, Theorem 7.2 (iii).** `E_{a ? b}` agrees with
`E_a x E_b` on `pairSeq` elements. -/
theorem theorem_7_2_iii (a b x y x' y' : Pomega) :
  (Ea (tensorR a b)).rel (pairSeq x y) (pairSeq x' y') <->
  (prodE (Ea a) (Ea b)).rel (pairSeq x y) (pairSeq x' y') := by
  constructor
  * intro <hu, hv, heq>
  obtain <rfl, rfl> := pairSeq_inj heq
  have hxy : typed x a /\ typed y b := (typed_pairSeq_tensorR a b x y).mp hu
  refine <?_, ?_, ?_, ?_>

```

```

* rw [pairSeq_app_zero, pairSeq_app_one]; rfl
* rw [pairSeq_app_zero, pairSeq_app_one]; rfl
* rw [pairSeq_app_zero]
  exact <hxy.1, hxy.1, rfl>
* rw [pairSeq_app_one]
  exact <hxy.2, hxy.2, rfl>
* intro <_hu, _hv, h0, h1>
  rw [pairSeq_app_zero, pairSeq_app_zero] at h0
  rw [pairSeq_app_one, pairSeq_app_one] at h1
  rcases h0 with <hx, hx', heqx>
  rcases h1 with <hy, hy', heqy>
  refine <(typed_pairSeq_tensorR a b x y).mpr <hx, hy>,
    (typed_pairSeq_tensorR a b x' y').mpr <hx', hy'>, ?_>
  rw [heqx, heqy]

/-- **Scott 1976, Theorem 7.2 (iii).**
The printed identity `E_{a ? b} = E_a x E_b`, for arbitrary representatives. -/
theorem theorem_7_2_iii_exact (a b u v : Pomega) :
  (Ea (tensorR a b)).rel u v <-> (prodE (Ea a) (Ea b)).rel u v := by
  constructor
* intro huv
  rcases huv with <hu, hv, rfl>
  rcases (theorem_4_4_typed.mp hu) with <hpair, ha, hb>
  refine <hpair, hpair, ?_, ?_>
* exact <ha, ha, rfl>
* exact <hb, hb, rfl>
* intro huv
  rcases huv with <hu, hv, h0, h1>
  rcases h0 with <hx, hx', heqx>
  rcases h1 with <hy, hy', heqy>
  have huvEq : u = v := by
    rw [hu, hv, heqx, heqy]
  refine <?_, ?_, huvEq>
* exact theorem_4_4_typed.mpr <hu, hx, hy>
* exact theorem_4_4_typed.mpr <hv, hx', hy'>

/-- **Scott 1976, Theorem 7.2 (iv).**
The exact identity
`E_{a ? b} = E_a + E_b U {<False,False>, < top , top >}`. -/
theorem theorem_7_2_iv {a b : Pomega} (ha : IsRetract a) (hb : IsRetract b)
  (u v : Pomega) :
  (Ea (plusR a b)).rel u v <->
    (sumE (Ea a) (Ea b)).rel u v \ /
    (u = botElem /\ v = botElem) \ / (u = topElem /\ v = topElem) := by
  constructor
* intro huv
  rcases huv with <hu, hv, huv>
  subst v
  rcases (plusR_typed_iff ha hb).mp hu with
    rfl | rfl | <x, rfl, hx> | <y, rfl, hy>
* exact Or.inr (Or.inl <rfl, rfl>)
* exact Or.inr (Or.inr <rfl, rfl>)
* exact Or.inl (Or.inl <by rw [pairElem_eq_pairSeq, pairSeq_app_one],
  by rw [pairElem_eq_pairSeq, pairSeq_app_one],
  by simpa [pairSeq_app_one] using (show (Ea a).rel x x from <hx, hx, rfl>)>>)
* exact Or.inl (Or.inr <by rw [pairElem_eq_pairSeq, pairSeq_app_one],
  by rw [pairElem_eq_pairSeq, pairSeq_app_one],
  by simpa [pairSeq_app_one] using (show (Ea b).rel y y from <hy, hy, rfl>)>>)
* intro h
  rcases h with h | <rfl, rfl> | <rfl, rfl>
  rcases h with <hu, hv, hA> | <hu, hv, hB>
* rcases hA with <hxt, hyt, heq>
  have heq' : u = v := by

```

```

      rw [hu, hv, heq]
      refine <?_, ?_, heq'>
      * rw [hu]; exact plusR_typed_inl hxt
      * rw [hv]; exact plusR_typed_inl hyt
    * rcases hB with <hxt, hyt, heq>
      have heq' : u = v := by
        rw [hu, hv, heq]
        refine <?_, ?_, heq'>
        * rw [hu]; exact plusR_typed_inr hxt
        * rw [hv]; exact plusR_typed_inr hyt
    * exact <plusR_typed_bot a b, plusR_typed_bot a b, rfl>
    * exact <plusR_typed_top a b, plusR_typed_top a b, rfl>

/-- **Scott 1976, Theorem 7.2 (The isomorphism theorem).** -/
theorem theorem_7_2 {a b : Pomega} (ha : IsRetract a) (hb : IsRetract b) :
  (forall x y, funOf a x = funOf a y <-> (Ea a).rel (funOf a x) (funOf a y)) /\
  (forall f g, (typed f (arrowR a b) -> (arrowE (Ea a) (Ea b)).mem f) /\
    ((arrowE (Ea a) (Ea b)).rel f g ->
      (Ea (arrowR a b)).rel (funOf (arrowR a b) f)
        (funOf (arrowR a b) g)) /\
      ((Ea (arrowR a b)).rel f g -> (arrowE (Ea a) (Ea b)).rel f g)) /\
  (forall u v, (Ea (tensorR a b)).rel u v <-> (prodE (Ea a) (Ea b)).rel u v) /\
  (forall u v, (Ea (plusR a b)).rel u v <->
    (sumE (Ea a) (Ea b)).rel u v /\
      (u = botElem /\ v = botElem) \/ (u = topElem /\ v = topElem)) :=
  <fun x y => theorem_7_2_i_iso ha x y,
    fun f g => theorem_7_2_ii ha hb f g,
    theorem_7_2_iii_exact a b,
    theorem_7_2_iv ha hb>

theorem Icomb_isGraph : Icomb = graph (fun x => funOf Icomb x) := by
  apply graph_ext
  intro x
  rw [Icomb_app]

/-- **Scott 1976, Theorem 7.3 (i).** `I : A -> A`. -/
theorem theorem_7_3_i (A : RestrictedEquiv) :
  (arrowE A A).mem Icomb :=
  <Icomb_isGraph, Icomb_isGraph, fun x y hxy => by simp [Icomb_app] using hxy>

theorem Kcomb_app (x : Pomega) :
  funOf Kcomb x = graph (fun _ => x) :=
  beta (graph_const_isScottContinuous (fun x _ => x)
    (fun _ => id_isScottContinuous)) x

theorem Kcomb_app2 (x y : Pomega) : funOf (funOf Kcomb x) y = x := by
  rw [Kcomb_app]
  exact beta (const_isScottContinuous x) y

theorem Kcomb_isGraph : Kcomb = graph (fun x => funOf Kcomb x) := by
  apply graph_ext
  intro x
  rw [Kcomb_app]

theorem Kcomb_app_isGraph (x : Pomega) :
  funOf Kcomb x = graph (fun y => funOf (funOf Kcomb x) y) := by
  rw [Kcomb_app]
  apply graph_ext
  intro y
  exact (beta (const_isScottContinuous x) y).symm

/-- **Scott 1976, Theorem 7.3 (ii).** `K : A -> (B -> A)`. -/
theorem theorem_7_3_ii (A B : RestrictedEquiv) :

```

```

    (arrowE A (arrowE B A)).mem Kcomb := by
  refine <Kcomb_isGraph, Kcomb_isGraph, ?_>
  intro x x' hx
  refine <Kcomb_app_isGraph x, Kcomb_app_isGraph x', ?_>
  intro y y' _hy
  simpa [Kcomb_app2] using hx

theorem Scomb_inner_isScottContinuous (u v : Pomega) :
  IsScottContinuous (fun x => funOf (funOf u x) (funOf v x)) :=
  continuous_tuple
    (fun y => funOf_isScottContinuous_left y)
    (fun t => funOf_isScottContinuous t)
    (funOf_isScottContinuous u)
    (funOf_isScottContinuous v)

theorem Scomb_mid_isScottContinuous (u : Pomega) :
  IsScottContinuous (fun v =>
    graph (fun x => funOf (funOf u x) (funOf v x))) :=
  graph_const_isScottContinuous
    (fun v x => funOf (funOf u x) (funOf v x))
    (fun x =>
      theorem_1_3 (funOf_isScottContinuous (funOf u x))
        (funOf_isScottContinuous_left x))

theorem Scomb_map_isScottContinuous :
  IsScottContinuous (fun u => graph (fun v =>
    graph (fun x => funOf (funOf u x) (funOf v x)))) :=
  graph_const_isScottContinuous
    (fun u v => graph (fun x => funOf (funOf u x) (funOf v x)))
    (fun v =>
      graph_const_isScottContinuous
        (fun u x => funOf (funOf u x) (funOf v x))
        (fun x =>
          theorem_1_3
            (f := fun t => funOf t (funOf v x))
            (g := fun u => funOf u x)
            (funOf_isScottContinuous_left (funOf v x))
            (funOf_isScottContinuous_left x)))

theorem Scomb_app (f : Pomega) :
  funOf Scomb f =
    graph (fun v => graph (fun x => funOf (funOf f x) (funOf v x))) :=
  beta Scomb_map_isScottContinuous f

theorem Scomb_app2 (f g : Pomega) :
  funOf (funOf Scomb f) g =
    graph (fun x => funOf (funOf f x) (funOf g x)) := by
  rw [Scomb_app]
  exact beta (Scomb_mid_isScottContinuous f) g

theorem Scomb_app3 (f g x : Pomega) :
  funOf (funOf (funOf Scomb f) g) x = funOf (funOf f x) (funOf g x) := by
  rw [Scomb_app2]
  exact beta (Scomb_inner_isScottContinuous f g) x

theorem Scomb_isGraph : Scomb = graph (fun u => funOf Scomb u) := by
  apply graph_ext
  intro u
  rw [Scomb_app]

theorem Scomb_app_isGraph (f : Pomega) :
  funOf Scomb f = graph (fun g => funOf (funOf Scomb f) g) := by
  rw [Scomb_app]

```

```

apply graph_ext
intro g
exact (beta (Scomb_mid_isScottContinuous f) g).symm

theorem Scomb_app2_isGraph (f g : Pomega) :
  funOf (funOf Scomb f) g =
    graph (fun x => funOf (funOf (funOf Scomb f) g) x) := by
  rw [Scomb_app2]
  apply graph_ext
  intro x
  exact (beta (Scomb_inner_isScottContinuous f g) x).symm

/-- **Scott 1976, Theorem 7.3 (iii).**
`S : (A -> (B -> C)) -> ((A -> B) -> (A -> C))`. -/
theorem theorem_7_3_iii (A B C : RestrictedEquiv) :
  (arrowE (arrowE A (arrowE B C))
    (arrowE (arrowE A B) (arrowE A C))).mem Scomb := by
  refine <Scomb_isGraph, Scomb_isGraph, ?_>
  intro f f' hf
  refine <Scomb_app_isGraph f, Scomb_app_isGraph f', ?_>
  intro g g' hg
  refine <Scomb_app2_isGraph f g, Scomb_app2_isGraph f' g', ?_>
  intro x x' hx
  have hgx : (arrowE A B).rel g g' := hg
  have hfx : (arrowE A (arrowE B C)).rel f f' := hf
  have hB : B.rel (funOf g x) (funOf g' x') := hgx.2.2 x x' hx
  have hBC : (arrowE B C).rel (funOf f x) (funOf f' x') := hfx.2.2 x x' hx
  simpa [Scomb_app3] using hBC.2.2 (funOf g x) (funOf g' x') hB

theorem theorem_7_3_I_unique (i : Pomega)
  (hi : forall A, (arrowE A A).mem i) : i = Icomb := by
  have hgraph : i = graph (fun x => funOf i x) := (hi emptyE).1
  apply graph_funOf_ext hgraph Icomb_isGraph
  intro a
  have ha : (singletonE a).mem (funOf i a) :=
    (theorem_7_1 (singletonE a) (singletonE a)).2.1 (hi (singletonE a))
    ((singletonE_mem a a).mpr rfl)
  simpa [Icomb_app, singletonE_mem] using ha

theorem theorem_7_3_K_unique (k : Pomega)
  (hk : forall A B, (arrowE A (arrowE B A)).mem k) : k = Kcomb := by
  have hgraph : k = graph (fun x => funOf k x) := (hk emptyE emptyE).1
  apply graph_funOf_ext hgraph Kcomb_isGraph
  intro a
  have hkA : (arrowE (singletonE a) (arrowE emptyE (singletonE a))).mem k :=
    hk (singletonE a) emptyE
  have hka : (arrowE emptyE (singletonE a)).mem (funOf k a) :=
    (theorem_7_1 (singletonE a) (arrowE emptyE (singletonE a))).2.1 hkA
    ((singletonE_mem a a).mpr rfl)
  apply graph_funOf_ext hka.1 (Kcomb_app_isGraph a)
  intro b
  have hkAB : (arrowE (singletonE a) (arrowE (singletonE b) (singletonE a))).mem k :=
    hk (singletonE a) (singletonE b)
  have hkab : (arrowE (singletonE b) (singletonE a)).mem (funOf k a) :=
    (theorem_7_1 (singletonE a) (arrowE (singletonE b) (singletonE a))).2.1 hkAB
    ((singletonE_mem a a).mpr rfl)
  have hab : (singletonE a).mem (funOf (funOf k a) b) :=
    (theorem_7_1 (singletonE b) (singletonE a)).2.1 hkab
    ((singletonE_mem b b).mpr rfl)
  simpa [Kcomb_app2, singletonE_mem] using hab

theorem eta2_map_isScottContinuous (f : Pomega) :
  IsScottContinuous (fun x => graph (fun y => funOf (funOf f x) y)) :=

```

```

graph_const_isScottContinuous
  (fun x y => funOf (funOf f x) y)
  (fun y =>
    theorem_1_3
      (f := fun t => funOf t y)
      (g := funOf f)
      (funOf_isScottContinuous_left y)
      (funOf_isScottContinuous f))

theorem eta2_app (f x : Pomega) :
  funOf (graph (fun z => graph (fun y => funOf (funOf f z) y))) x =
    graph (fun y => funOf (funOf f x) y) :=
  beta (eta2_map_isScottContinuous f) x

theorem theorem_7_3_S_unique (s : Pomega)
  (h?1 : forall f, funOf s f =
    funOf s (graph (fun x => graph (fun y => funOf (funOf f x) y))))
  (h?2 : forall f g, funOf (funOf s f) g =
    funOf (funOf s f) (graph (fun x => funOf g x)))
  (hs : forall A B C,
    (arrowE (arrowE A (arrowE B C))
      (arrowE (arrowE A B) (arrowE A C))).mem s) :
  s = Scomb := by
  have hsg : s = graph (fun f => funOf s f) := (hs emptyE emptyE emptyE).1
  apply graph_funOf_ext hsg Scomb_isGraph
  intro f
  let f' : Pomega := graph (fun x => graph (fun y => funOf (funOf f x) y))
  have hf'app (z : Pomega) : funOf f' z = graph (fun y => funOf (funOf f z) y) :=
    eta2_app f z
  have hf'graph : f' = graph (fun z => funOf f' z) := by
    apply graph_ext
    intro z
    exact (hf'app z).symm
  have hsf : funOf s f = funOf s f' := h?1 f
  have hsf'graph : funOf s f' = graph (fun g => funOf (funOf s f') g) := by
    have hf'mem : (arrowE emptyE (arrowE emptyE emptyE)).mem f' :=
      <hf'graph, hf'graph, fun _ _ h => False.elim h>
    have := (theorem_7_1 (arrowE emptyE (arrowE emptyE emptyE))
      (arrowE (arrowE emptyE emptyE) (arrowE emptyE emptyE))).2.1
      (hs emptyE emptyE emptyE) hf'mem
    exact this.1
  apply graph_funOf_ext (by rw [hsf]; exact hsf'graph) (Scomb_app_isGraph f)
  intro g
  let g' : Pomega := graph (funOf g)
  have hg'app (z : Pomega) : funOf g' z = funOf g z :=
    beta (funOf_isScottContinuous g) z
  have hg'graph : g' = graph (fun z => funOf g' z) := by
    apply graph_ext
    intro z
    exact (hg'app z).symm
  have hsg : funOf (funOf s f) g = funOf (funOf s f) g' := h?2 f g
  have hsg' : funOf (funOf s f) g' = funOf (funOf s f') g' := by
    rw [hsf]
  have hsg'graph :
    funOf (funOf s f') g' =
      graph (fun z => funOf (funOf (funOf s f') g') z) := by
    have hg'mem : (arrowE emptyE emptyE).mem g' :=
      <hg'graph, hg'graph, fun _ _ h => False.elim h>
    have hf'mem : (arrowE emptyE (arrowE emptyE emptyE)).mem f' :=
      <hf'graph, hf'graph, fun _ _ h => False.elim h>
    have hsf'mem :
      (arrowE (arrowE emptyE emptyE) (arrowE emptyE emptyE)).mem (funOf s f') :=
      (theorem_7_1 (arrowE emptyE (arrowE emptyE emptyE))

```

```

      (arrowE (arrowE emptyE emptyE) (arrowE emptyE emptyE)).2.1
      (hs emptyE emptyE emptyE) hf'mem
    exact ((theorem_7_1 (arrowE emptyE emptyE)
      (arrowE emptyE emptyE)).2.1 hsf'mem hg'mem).1
  apply graph_funOf_ext
    (by rw [hsg, hsg']; exact hsg'graph) (Scomb_app2_isGraph f g)
  intro arg
  let A := singletonE arg
  let B := singletonE (funOf g arg)
  let C := singletonE (funOf (funOf f arg) (funOf g arg))
  have hf'memABC : (arrowE A (arrowE B C)).mem f' := by
    refine <hf'graph, hf'graph, ?_>
    intro x_1 x_2 hx_1_2
    have hx_1 : x_1 = arg := hx_1_2.1
    have hx_2 : x_2 = arg := hx_1_2.2
    have hfxgraph (z : Pomega) :
      funOf f' z = graph (fun y => funOf (funOf f' z) y) := by
      rw [hf'app]
      apply graph_ext
      intro y
      exact (beta (funOf_isScottContinuous (funOf f z)) y).symm
    rw [hx_1, hx_2]
    refine <hfxgraph arg, hfxgraph arg, ?_>
    intro y_1 y_2 hy
    have hy_1 : y_1 = funOf g arg := hy.1
    have hy_2 : y_2 = funOf g arg := hy.2
    rw [hy_1, hy_2, hf'app]
    have happ :
      funOf (graph (fun y => funOf (funOf f arg) y)) (funOf g arg) =
      funOf (funOf f arg) (funOf g arg) :=
      beta (funOf_isScottContinuous (funOf f arg)) (funOf g arg)
    exact happ.symm |> <rfl, rfl>

```

Lean 4 source (lines 1601–2000)

```

  have hg'memAB : (arrowE A B).mem g' := by
    refine <hg'graph, hg'graph, ?_>
    intro x_1 x_2 hx_1_2
    have hx_1 : x_1 = arg := hx_1_2.1
    have hx_2 : x_2 = arg := hx_1_2.2
    rw [hx_1, hx_2, hg'app]
    exact <rfl, rfl>
  have hsf'mem :
    (arrowE (arrowE A B) (arrowE A C)).mem (funOf s f') :=
    (theorem_7_1 (arrowE A (arrowE B C))
      (arrowE (arrowE A B) (arrowE A C))).2.1 (hs A B C) hf'memABC
  have hsg'mem : (arrowE A C).mem (funOf (funOf s f') g') :=
    (theorem_7_1 (arrowE A B) (arrowE A C)).2.1 hsf'mem hg'memAB
  have hxA : A.mem arg := (singletonE_mem arg arg).mpr rfl
  have hval : C.mem (funOf (funOf (funOf s f') g') arg) :=
    (theorem_7_1 A C).2.1 hsg'mem hxA
  have hval' : funOf (funOf (funOf s f') g') arg =
    funOf (funOf f arg) (funOf g arg) :=
    (singletonE_mem _ _).mp hval
  have hgoal : funOf (funOf (funOf s f) g) arg =
    funOf (funOf (funOf s f') g') arg := by
    rw [hsg, hsg']
  rw [hgoal, hval', Scomb_app3]

/-- **Scott 1976, Theorem 7.3 (The functionality theorem).** -/
theorem theorem_7_3 :
  (forall A, (arrowE A A).mem Icomb) /\
  (forall A B, (arrowE A (arrowE B A)).mem Kcomb) /\
  (forall A B C,

```

```

      (arrowE (arrowE A (arrowE B C))
        (arrowE (arrowE A B) (arrowE A C))).mem Scomb) /\
    (forall i, (forall A, (arrowE A A).mem i) -> i = Icomb) /\
    (forall k, (forall A B, (arrowE A (arrowE B A)).mem k) -> k = Kcomb) /\
    (forall s,
      (forall f, funOf s f =
        funOf s (graph (fun x => graph (fun y => funOf (funOf f x) y)))) ->
      (forall f g, funOf (funOf s f) g =
        funOf (funOf s f) (graph (fun x => funOf g x))) ->
      (forall A B C,
        (arrowE (arrowE A (arrowE B C))
          (arrowE (arrowE A B) (arrowE A C))).mem s) ->
      s = Scomb) :=
<theorem_7_3_i, theorem_7_3_ii, theorem_7_3_iii,
  theorem_7_3_I_unique, theorem_7_3_K_unique, theorem_7_3_S_unique>

/-- **Scott 1976, (7.15)-(7.16).** Iterators `Z_n`. -/
def Z : Nat -> Pomega -> Pomega -> Pomega
| 0, _, x => x
| n + 1, f, x => funOf f (Z n f x)

theorem Z_rel (A : RestrictedEquiv) (n : Nat) {f f' x y : Pomega}
  (hf : forall a b, A.rel a b -> A.rel (funOf f a) (funOf f' b))
  (hxy : A.rel x y) :
  A.rel (Z n f x) (Z n f' y) := by
  induction n with
  | zero => simpa [Z] using hxy
  | succ n ih =>
    simpa [Z] using hf _ _ ih

theorem Z_isScottContinuous_right (n : Nat) (f : Pomega) :
  IsScottContinuous (fun x => Z n f x) := by
  induction n with
  | zero => simpa [Z] using id_isScottContinuous
  | succ n ih =>
    simpa [Z] using theorem_1_3 (funOf_isScottContinuous f) ih

theorem Z_isScottContinuous_left (n : Nat) (x : Pomega) :
  IsScottContinuous (fun f => Z n f x) := by
  induction n with
  | zero => simpa [Z] using const_isScottContinuous x
  | succ n ih =>
    simpa [Z] using
      continuous_tuple
      (fun y => funOf_isScottContinuous_left y)
      (fun u => funOf_isScottContinuous u)
      id_isScottContinuous ih

/-- **Scott 1976, (7.15)-(7.16).** Combinators `Z_n = fun f fun x. f?(x)`. -/
def Zcomb (n : Nat) : Pomega :=
  graph (fun f => graph (fun x => Z n f x))

theorem Zcomb_map_isScottContinuous (n : Nat) :
  IsScottContinuous (fun f => graph (fun x => Z n f x)) :=
  graph_const_isScottContinuous (fun f x => Z n f x)
  (fun x => Z_isScottContinuous_left n x)

theorem Zcomb_app (n : Nat) (f : Pomega) :
  funOf (Zcomb n) f = graph (fun x => Z n f x) :=
  beta (Zcomb_map_isScottContinuous n) f

theorem Zcomb_app2 (n : Nat) (f x : Pomega) :
  funOf (funOf (Zcomb n) f) x = Z n f x := by

```



```

rw [Zcomb_app]
exact beta (Z_isScottContinuous_right n f) x

theorem Zcomb_isGraph (n : Nat) :
  Zcomb n = graph (fun f => funOf (Zcomb n) f) := by
  apply graph_ext
  intro f
  rw [Zcomb_app]

theorem Zcomb_app_isGraph (n : Nat) (f : Pomega) :
  funOf (Zcomb n) f = graph (fun x => funOf (funOf (Zcomb n) f) x) := by
  rw [Zcomb_app]
  apply graph_ext
  intro x
  exact (beta (Z_isScottContinuous_right n f) x).symm

/-- **Scott 1976, Theorem 7.4 (i).** `Z_n : (A -> A) -> (A -> A)`. -/
theorem theorem_7_4_i (A : RestrictedEquiv) (n : Nat) :
  (arrowE (arrowE A A) (arrowE A A)).mem (Zcomb n) := by
  refine <Zcomb_isGraph n, Zcomb_isGraph n, ?_>
  intro f f' hf
  refine <Zcomb_app_isGraph n f, Zcomb_app_isGraph n f', ?_>
  intro x y hxy
  simp [Zcomb_app2] using Z_rel A n hf.2.2 hxy

/-- The identity on the orbit `{f?(x) | n in ?}`. -/
def iterateE (f x : Pomega) : RestrictedEquiv where
  rel := fun u v => (exists n, u = Z n f x) /\ u = v
  symm := by
    intro u v <hn, h>
    exact <by rw [← h]; exact hn, h.symm>
  trans := by
    intro u v w <hn, hxy> <_, hyz>
    exact <hn, hxy.trans hyz>

theorem Z_graph_funOf (n : Nat) (f x : Pomega) :
  Z n (graph (fun y => funOf f y)) x = Z n f x := by
  induction n with
  | zero => simp [Z]
  | succ n ih =>
    simp [Z, ih]
    have : funOf (graph (fun y => funOf f y)) (Z n f x) = funOf f (Z n f x) :=
      beta (funOf_isScottContinuous f) (Z n f x)
    exact this

/-- Plotkin: if `z` is typed as an iterator and is extensional in its first
argument, then `z(f)(x)` is some iterate `f?(x)`. -/
theorem theorem_7_4_plotkin (z : Pomega)
  (hf : forall f, funOf z f = funOf z (graph (fun y => funOf f y)))
  (hz : forall A, (arrowE (arrowE A A) (arrowE A A)).mem z)
  (f x : Pomega) :
  exists n, funOf (funOf z f) x = Z n f x := by
  let f' : Pomega := graph (fun y => funOf f y)
  have hf'graph : f' = graph (fun y => funOf f' y) := by
    apply graph_ext
    intro y
    exact (beta (funOf_isScottContinuous f) y).symm
  let A := iterateE f' x
  have hf'mem : (arrowE A A).mem f' := by
    refine <hf'graph, hf'graph, ?_>
    intro u v huv
    rcases huv with <<n, rfl>, rfl>
    refine <<n + 1, rfl>, rfl>

```

```

have hzA : (arrowE (arrowE A A) (arrowE A A)).mem z := hz A
have hzf : (arrowE A A).mem (funOf z f') :=
  (theorem_7_1 (arrowE A A) (arrowE A A)).2.1 hzA hf'mem
have hx : A.mem x := <<0, by simp [Z]>, rfl>
have hval : A.mem (funOf (funOf z f') x) :=
  (theorem_7_1 A A).2.1 hzf hx
obtain <<n, hn>, _> := hval
refine <n, ?_>
have h?f : funOf z f = funOf z f' := h? f
rw [h?f, hn, Z_graph_funOf]

/-- **Scott 1976, (7.17).** Independent successor functions. -/
def sigmaJ (j : Nat) (x : Pomega) : Pomega :=
  {p | exists k, pair j (k + 1) = p /\ pair j k in x}

theorem sigmaJ_isScottContinuous (j : Nat) : IsScottContinuous (sigmaJ j) := by
  intro x
  ext p
  constructor
  * intro <k, heq, hp>
    refine mem_scottUnion.mpr <2 ^ pair j k, ?_, k, heq, ?_>
    * simpa [e_pow2, Set.singleton_subset_iff] using hp
    * simp [e_pow2]
  * intro hp
    obtain <n, hn, k, heq, hpk> := mem_scottUnion.mp hp
    exact <k, heq, hn hpk>

theorem sigmaJ_app (j : Nat) (x : Pomega) :
  funOf (graph (sigmaJ j)) x = sigmaJ j x := by
  simpa using congrArg (fun g => g x) (theorem_1_2_i (sigmaJ_isScottContinuous j))

theorem sigmaJ_bot (j : Nat) : sigmaJ j botElem = botElem := by
  ext p
  simp [sigmaJ, botElem]

theorem sigmaJ_succ_singleton (j m : Nat) :
  sigmaJ j {pair j m} = ({pair j (m + 1)} : Pomega) := by
  ext p
  constructor
  * intro <k, heq, hp>
    have : k = m := (pair_inj hp).2
    subst this
    simp [heq]
  * intro hp
    exact <m, hp.symm, by simp>

theorem sigmaJ_succ_ne (j j' m : Nat) (hne : j != j') :
  sigmaJ j {pair j' m} = botElem := by
  ext p
  constructor
  * intro <k, _hk, hp>
    have : pair j k = pair j' m := by
      simpa [Set.mem_singleton_iff] using hp
    exact (hne (pair_inj this).1).elim
  * intro hp
    simp [botElem] at hp

/-- **Scott 1976, (7.18).** Equal tags: `sigma_j^m({(j,0)}) = {(j,m)}`. -/
theorem eq_7_18_eq (j m : Nat) :
  Z m (graph (sigmaJ j)) {pair j 0} = ({pair j m} : Pomega) := by
  induction m with
  | zero => rfl
  | succ m ih =>

```

```

calc
  Z (m + 1) (graph (sigmaJ j)) {pair j 0}
  = funOf (graph (sigmaJ j)) (Z m (graph (sigmaJ j)) {pair j 0}) := rfl
  _ = sigmaJ j (Z m (graph (sigmaJ j)) {pair j 0}) := sigmaJ_app _ _
  _ = sigmaJ j {pair j m} := by rw [ih]
  _ = {pair j (m + 1)} := sigmaJ_succ_singleton j m

/-- **Scott 1976, (7.18).** Distinct tags:  $\sigma_j^{m+1}(\{(j',0)\}) = \text{False}$ . -/
theorem eq_7_18_ne (j j' m : Nat) (hne : j != j') :
  Z (m + 1) (graph (sigmaJ j)) {pair j' 0} = botElem := by
  induction m with
  | zero =>
    calc
      Z 1 (graph (sigmaJ j)) {pair j' 0}
      = funOf (graph (sigmaJ j)) {pair j' 0} := rfl
      _ = sigmaJ j {pair j' 0} := sigmaJ_app _ _
      _ = botElem := sigmaJ_succ_ne j j' 0 hne
  | succ m ih =>
    calc
      Z (m + 1 + 1) (graph (sigmaJ j)) {pair j' 0}
      = funOf (graph (sigmaJ j))
        (Z (m + 1) (graph (sigmaJ j)) {pair j' 0}) := rfl
      _ = sigmaJ j (Z (m + 1) (graph (sigmaJ j)) {pair j' 0}) :=
        sigmaJ_app _ _
      _ = sigmaJ j botElem := by rw [ih]
      _ = botElem := sigmaJ_bot j

theorem sigmaJ_pair_union (j j' m : Nat) (hne : j != j') :
  sigmaJ j (({pair j m} : Pomega) U {pair j' m}) =
  ({pair j (m + 1)} : Pomega) := by
  ext p
  constructor
  * intro <k, hp, hk>
    rcases hk with hk | hk
    * have hkm : k = m := (pair_inj hk).2
      subst k
      simpa using hp.symm
    * have hj : j = j' := (pair_inj hk).1
      exact (hne hj).elim
  * intro hp
    exact <m, hp.symm, Or.inl (by simp)>

/-- **Scott 1976, (7.19).**
Independent successor powers advance both tagged atoms in lockstep. -/
theorem eq_7_19 (j j' m : Nat) :
  Z m (graph (sigmaJ j) U graph (sigmaJ j'))
  (({pair j 0} : Pomega) U {pair j' 0}) =
  ({pair j m} : Pomega) U {pair j' m} := by
  by_cases h : j = j'
  * subst j'
    simp only [Set.union_self]
    exact eq_7_18_eq j m
  * induction m with
    | zero => rfl
    | succ m ih =>
      rw [Z, eq_2_9, ih, sigmaJ_app, sigmaJ_app,
        sigmaJ_pair_union j j' m h]
      rw [show sigmaJ j' (({pair j m} : Pomega) U {pair j' m}) =
        ({pair j' (m + 1)} : Pomega) by
        simpa [Set.union_comm] using sigmaJ_pair_union j' j m (Ne.symm h)]]

```

```

theorem theorem_7_4_sigma_index (z : Pomega)
  (h? : forall f, funOf z f = funOf z (graph (fun y => funOf f y)))
  (hz : forall A, (arrowE (arrowE A A) (arrowE A A)).mem z) :
  exists n, forall j,
    funOf (funOf z (graph (sigmaJ j))) {pair j 0} =
      ({pair j n} : Pomega) := by
obtain <n, hn> :=
  theorem_7_4_plotkin z h? hz (graph (sigmaJ 0)) {pair 0 0}
refine <n, ?_>
intro j
have hn' :
  funOf (funOf z (graph (sigmaJ 0))) {pair 0 0} =
    ({pair 0 n} : Pomega) := by
  rw [hn, eq_7_18_eq]
by_cases hj : j = 0
* subst j
  exact hn'
obtain <nj, hnj> :=
  theorem_7_4_plotkin z h? hz (graph (sigmaJ j)) {pair j 0}
have hnj' :
  funOf (funOf z (graph (sigmaJ j))) {pair j 0} =
    ({pair j nj} : Pomega) := by
  rw [hnj, eq_7_18_eq]
obtain <k, hk> := theorem_7_4_plotkin z h? hz
  (graph (sigmaJ 0) U graph (sigmaJ j))
  (({pair 0 0} : Pomega) U {pair j 0})
have hk' :
  funOf
    (funOf z (graph (sigmaJ 0) U graph (sigmaJ j)))
    (({pair 0 0} : Pomega) U {pair j 0}) =
    ({pair 0 k} : Pomega) U {pair j k} := by
  rw [hk, eq_7_19]
have hmono0 :
  funOf (funOf z (graph (sigmaJ 0))) {pair 0 0} subseq
    funOf
      (funOf z (graph (sigmaJ 0) U graph (sigmaJ j)))
      (({pair 0 0} : Pomega) U {pair j 0}) :=
  mu_law
    (funOf_monotone_right z Set.subset_union_left)
    Set.subset_union_left
have hmonoj :
  funOf (funOf z (graph (sigmaJ j))) {pair j 0} subseq
    funOf
      (funOf z (graph (sigmaJ 0) U graph (sigmaJ j)))
      (({pair 0 0} : Pomega) U {pair j 0}) :=
  mu_law
    (funOf_monotone_right z Set.subset_union_right)
    Set.subset_union_right
have h0mem : pair 0 n in ({pair 0 k} : Pomega) U {pair j k} := by
  rw [← hk']
  apply hmono0
  rw [hn']
  simp
have hjmem : pair j nj in ({pair 0 k} : Pomega) U {pair j k} := by
  rw [← hk']
  apply hmonoj
  rw [hnj']
  simp
have hnk : n = k := by
  rcases h0mem with h0 | h0
  * exact (pair_inj h0).2
  * exact (hj ((pair_inj h0).1).symm).elim
have hnjk : nj = k := by

```

```

    rcases hjmem with hj0 | hjj
    * exact (hj (pair_inj hj0).1).elim
    * exact (pair_inj hjj).2
  rw [hnj', hnjk, <- hnk]

def eraseTag (j : Nat) (u : Pomega) : Pomega :=
  {p | p in u /\ forall k, p != pair j k}

theorem Z_finite_bound (p q m : Nat) :
  forall k in Z m (e p) (e q), k <= max p q := by
  induction m with
  | zero =>
    intro k hk
    exact (mem_e_le hk).trans (Nat.le_max_right p q)
  | succ m ih =>
    intro k hk
    obtain <r, _hr, hpair> := hk
    exact (pair_le_right r k).trans
      ((mem_e_le hpair).trans (Nat.le_max_left p q))

theorem Z_finite_no_tag (p q m k : Nat) :
  pair (max p q + 1) k notin Z m (e p) (e q) := by
  intro hk
  have hle := Z_finite_bound p q m _ hk
  exact (Nat.not_succ_le_self (max p q))
    ((pair_le_left (max p q + 1) k).trans hle)

theorem funOf_e_union_fresh (p j m : Nat) (u : Pomega) (hpj : p < j) :
  funOf (e p) (u U {pair j m}) = funOf (e p) u := by
  apply subset_antisymm
  * intro k hk
    obtain <r, hr, hprk> := hk
    refine <r, ?, hprk>
    intro t ht
    rcases hr ht with htu | htag
    * exact htu
    * have htEq : t = pair j m := by simpa using htag
      have hjr : j <= r := by
        rw [htEq] at ht
        exact (pair_le_left j m).trans (mem_e_le ht)
      have hrp : r <= p := (pair_le_left r k).trans (mem_e_le hprk)
      exact (Nat.not_lt_of_ge (hjr.trans hrp) hpj).elim
  * exact funOf_monotone_right (e p) Set.subset_union_left

theorem sigmaJ_of_no_tag {j : Nat} {u : Pomega}
  (hu : forall k, pair j k notin u) :
  sigmaJ j u = botElem := by
  ext p
  constructor
  * intro <k, _hp, hk>
    exact (hu k hk).elim
  * simp [botElem]

theorem sigmaJ_union_fresh {j m : Nat} {u : Pomega}
  (hu : forall k, pair j k notin u) :
  sigmaJ j (u U {pair j m}) = ({pair j (m + 1)} : Pomega) := by

```

Lean 4 source (lines 2001–2400)

```

  rw [show u U {pair j m} = ({pair j m} : Pomega) U u by
    exact Set.union_comm _ _]
  ext p
  constructor
  * intro <k, hp, hk>

```

```

rcases hk with hk | hk
* have hkm : k = m := (pair_inj hk).2
  subst k
  simpa using hp.symm
* exact (hu k hk).elim
* intro hp
  exact <m, hp.symm, Or.inl (by simp)>

theorem plotkin_finite_separation (p q m : Nat) :
  Z m
    (graph (fun y => funOf (e p) y) U
      graph (sigmaJ (max p q + 1)))
    ((e q) U {pair (max p q + 1) 0}) =
  Z m (e p) (e q) U {pair (max p q + 1) m} := by
induction m with
| zero => rfl
| succ m ih =>
  rw [Z, eq_2_9, ih]
  have hbeta :
    funOf (graph (fun y => funOf (e p) y))
      (Z m (e p) (e q) U {pair (max p q + 1) m}) =
    funOf (e p) (Z m (e p) (e q) U {pair (max p q + 1) m}) :=
    beta (funOf_isScottContinuous (e p)) _
  rw [hbeta, funOf_e_union_fresh p (max p q + 1) m _
    (Nat.lt_succ_of_le (Nat.le_max_left p q)), sigmaJ_app,
    sigmaJ_union_fresh (fun k => Z_finite_no_tag p q m k)]
  rfl

def plotkinRel (p q j : Nat) (u v : Pomega) : Prop :=
  exists m, (u = Z m (e p) (e q) /\
    v = Z m (e p) (e q) U {pair j m}) /\
  (v = Z m (e p) (e q) /\
    u = Z m (e p) (e q) U {pair j m})

def plotkinGood (p q j : Nat) (u : Pomega) : Prop :=
  exists m, u = Z m (e p) (e q) /\
    u = Z m (e p) (e q) U {pair j m}

def plotkinE (p q j : Nat) : RestrictedEquiv where
  rel u v :=
    plotkinGood p q j u /\ plotkinGood p q j v /\
    Relation.EqvGen (plotkinRel p q j) u v
  symm := by
    intro u v <hu, hv, huv>
    exact <hv, hu, Relation.EqvGen.symm _ _ huv>
  trans := by
    intro u v w <hu, _hv, huv> <_hv', hw, hvw>
    exact <hu, hw, Relation.EqvGen.trans _ _ _ huv hvw>

theorem eraseTag_Z_finite (p q m : Nat) :
  eraseTag (max p q + 1) (Z m (e p) (e q)) = Z m (e p) (e q) := by
  ext k
  constructor
  * exact fun hk => hk.1
  * intro hk
    exact <hk, fun r hkr => Z_finite_no_tag p q m r (hkr |> hk)>

theorem eraseTag_Z_finite_union (p q m : Nat) :
  eraseTag (max p q + 1)
    (Z m (e p) (e q) U {pair (max p q + 1) m}) =
  Z m (e p) (e q) := by
  ext k
  constructor

```

```

* intro <hk, hnot>
  rcases hk with hk | hk
* exact hk
* exact (hnot m (by simp using hk)).elim
* intro hk
  exact <Or.inl hk, fun r hkr => Z_finite_no_tag p q m r (hkr |> hk)>

theorem plotkinE_erase {p q : Nat} {u v : Pomega}
  (h : (plotkinE p q (max p q + 1)).rel u v) :
  eraseTag (max p q + 1) u = eraseTag (max p q + 1) v := by
  rcases h with <_hu, _hv, h>
  clear _hu _hv
  induction h with
  | rel x y hxy =>
    rcases hxy with <m, <rfl, rfl> | <rfl, rfl>>
    * rw [eraseTag_Z_finite, eraseTag_Z_finite_union]
    * rw [eraseTag_Z_finite, eraseTag_Z_finite_union]
  | refl => rfl
  | symm _ _ _ ih => exact ih.symm
  | trans _ _ _ _ ih_1 ih_2 => exact ih_1.trans ih_2

theorem normalized_finite_app (p : Nat) (u : Pomega) :
  funOf (graph (fun y => funOf (e p) y)) u = funOf (e p) u :=
  beta (funOf_isScottContinuous (e p)) u

theorem normalized_finite_fresh_app (p q m : Nat) :
  funOf (graph (fun y => funOf (e p) y))
    (Z m (e p) (e q) U {pair (max p q + 1) m}) =
  Z (m + 1) (e p) (e q) := by
  rw [normalized_finite_app,
    funOf_e_union_fresh p (max p q + 1) m _
    (Nat.lt_succ_of_le (Nat.le_max_left p q))]
  rfl

theorem finite_sigma_union_app (p q m : Nat) :
  funOf
    (graph (fun y => funOf (e p) y) U
      graph (sigmaJ (max p q + 1)))
    (Z m (e p) (e q) U {pair (max p q + 1) m}) =
  Z (m + 1) (e p) (e q) U {pair (max p q + 1) (m + 1)} := by
  rw [eq_2_9, normalized_finite_fresh_app, sigmaJ_app,
    sigmaJ_union_fresh (fun k => Z_finite_no_tag p q m k)]

theorem finite_sigma_plain_app (p q m : Nat) :
  funOf
    (graph (fun y => funOf (e p) y) U
      graph (sigmaJ (max p q + 1)))
    (Z m (e p) (e q)) =
  Z (m + 1) (e p) (e q) := by
  rw [eq_2_9, normalized_finite_app, sigmaJ_app,
    sigmaJ_of_no_tag (fun k => Z_finite_no_tag p q m k)]
  simp [botElem, Z]

theorem plotkin_function_related (p q : Nat) :
  (arrowE
    (plotkinE p q (max p q + 1))
    (plotkinE p q (max p q + 1))).rel
    (graph (fun y => funOf (e p) y))
    (graph (fun y => funOf (e p) y) U
      graph (sigmaJ (max p q + 1))) := by
  have hgf : graph (fun y => funOf (e p) y) =
    graph (fun y => funOf (graph (fun y => funOf (e p) y)) y) := by
    apply graph_ext

```

```

intro y
exact (beta (funOf_isScottContinuous (e p)) y).symm
have hgu :
  graph (fun y => funOf (e p) y) U graph (sigmaJ (max p q + 1)) =
    graph (fun y => funOf
      (graph (fun y => funOf (e p) y) U
        graph (sigmaJ (max p q + 1))) y) := by
let F := fun y => funOf (e p) y U sigmaJ (max p q + 1) y
have hrep :
  graph (fun y => funOf (e p) y) U graph (sigmaJ (max p q + 1)) =
    graph F := eq_2_10 _ _
rw [hrep]
congr 1
funext y
dsimp only [F]
rw [← hrep]
rw [eq_2_9, normalized_finite_app, sigmaJ_app]
refine <hgf, hgu, ?_>
intro u v huv
have herase := plotkinE_erase huv
rcases huv.1 with <r, hur | hur>
<;> rcases huv.2.1 with <s, hvs | hvs>
all_goals
  subst u
  subst v
* have hrs : Z r (e p) (e q) = Z s (e p) (e q) := by
  simpa [eraseTag_Z_finite] using herase
have hrs' : Z (r + 1) (e p) (e q) = Z (s + 1) (e p) (e q) := by
  simpa [Z] using congrArg (fun w => funOf (e p) w) hrs
have hleft :
  funOf (graph (fun y => funOf (e p) y)) (Z r (e p) (e q)) =
    Z (r + 1) (e p) (e q) := by
  rw [normalized_finite_app]
  rfl
have hright :
  funOf
    (graph (fun y => funOf (e p) y) U
      graph (sigmaJ (max p q + 1)))
    (Z s (e p) (e q)) = Z (s + 1) (e p) (e q) :=
  finite_sigma_plain_app p q s
rw [hleft, hright, ← hrs']
exact <<r + 1, Or.inl rfl>, <r + 1, Or.inl rfl>,
  Relation.EqvGen.refl _>
* have hrs : Z r (e p) (e q) = Z s (e p) (e q) := by
  exact (eraseTag_Z_finite p q r).symm.trans
    (herase.trans (eraseTag_Z_finite_union p q s))
have hrs' : Z (r + 1) (e p) (e q) = Z (s + 1) (e p) (e q) := by
  simpa [Z] using congrArg (fun w => funOf (e p) w) hrs
have hleft :
  funOf (graph (fun y => funOf (e p) y)) (Z r (e p) (e q)) =
    Z (r + 1) (e p) (e q) := by
  rw [normalized_finite_app]
  rfl
have hright :
  funOf
    (graph (fun y => funOf (e p) y) U
      graph (sigmaJ (max p q + 1)))
    (Z s (e p) (e q) U {pair (max p q + 1) s}) =
  Z (s + 1) (e p) (e q) U
    {pair (max p q + 1) (s + 1)} :=
  finite_sigma_union_app p q s
rw [hleft, hright, hrs']
exact <<s + 1, Or.inl rfl>, <s + 1, Or.inr rfl>,

```



```

Relation.EqvGen.rel _ _
  <s + 1, Or.inl <rfl, rfl>>>
* have hrs : Z r (e p) (e q) = Z s (e p) (e q) := by
  exact (eraseTag_Z_finite_union p q r).symm.trans
    (herase.trans (eraseTag_Z_finite p q s))
have hrs' : Z (r + 1) (e p) (e q) = Z (s + 1) (e p) (e q) := by
  simpa [Z] using congrArg (fun w => funOf (e p) w) hrs
have hleft :
  funOf (graph (fun y => funOf (e p) y))
    (Z r (e p) (e q) U {pair (max p q + 1) r}) =
    Z (r + 1) (e p) (e q) :=
  normalized_finite_fresh_app p q r
have hright :
  funOf
    (graph (fun y => funOf (e p) y) U
      graph (sigmaJ (max p q + 1)))
    (Z s (e p) (e q)) = Z (s + 1) (e p) (e q) :=
  finite_sigma_plain_app p q s
rw [hleft, hright, <- hrs']
exact <<r + 1, Or.inl rfl>, <r + 1, Or.inl rfl>,
  Relation.EqvGen.refl _>
* have hrs : Z r (e p) (e q) = Z s (e p) (e q) := by
  simpa using (eraseTag_Z_finite_union p q r).symm.trans
    (herase.trans (eraseTag_Z_finite_union p q s))
have hrs' : Z (r + 1) (e p) (e q) = Z (s + 1) (e p) (e q) := by
  simpa [Z] using congrArg (fun w => funOf (e p) w) hrs
have hleft :
  funOf (graph (fun y => funOf (e p) y))
    (Z r (e p) (e q) U {pair (max p q + 1) r}) =
    Z (r + 1) (e p) (e q) :=
  normalized_finite_fresh_app p q r
have hright :
  funOf
    (graph (fun y => funOf (e p) y) U
      graph (sigmaJ (max p q + 1)))
    (Z s (e p) (e q) U {pair (max p q + 1) s}) =
    Z (s + 1) (e p) (e q) U
      {pair (max p q + 1) (s + 1)} :=
  finite_sigma_union_app p q s
rw [hleft, hright, hrs']
exact <<s + 1, Or.inl rfl>, <s + 1, Or.inr rfl>,
  Relation.EqvGen.rel _ _
  <s + 1, Or.inl <rfl, rfl>>>

theorem theorem_7_4_finite (z : Pomega)
  (h? : forall f, funOf z f = funOf z (graph (fun y => funOf f y)))
  (hz : forall A, (arrowE (arrowE A A) (arrowE A A)).mem z)
  {n : Nat}
  (hn : forall j, funOf (funOf z (graph (sigmaJ j))) {pair j 0} =
    ({pair j n} : Pomega))
  (p q : Nat) :
  funOf (funOf z (e p)) (e q) = Z n (e p) (e q) := by
let j := max p q + 1
let gf := graph (fun y => funOf (e p) y)
let gu := gf U graph (sigmaJ j)
have hfg : (arrowE
  (plotkinE p q j) (plotkinE p q j)).rel gf gu := by
  simpa [j, gf, gu] using plotkin_function_related p q
have hzfg :
  (arrowE (plotkinE p q j) (plotkinE p q j)).rel
    (funOf z gf) (funOf z gu) :=
  (hz (plotkinE p q j)).2.2 gf gu hfg
have hstart :

```

```

    (plotkinE p q j).rel (e q) (e q U {pair j 0}) := by
    refine <<0, Or.inl rfl>, <0, Or.inr rfl>, ?_>
    exact Relation.EqvGen.rel _ _
    <0, Or.inl <rfl, rfl>>
have hout :
  (plotkinE p q j).rel
    (funOf (funOf z gf) (e q))
    (funOf (funOf z gu) (e q U {pair j 0})) :=
  hzfg.2.2 _ _ hstart
obtain <r, hr> := theorem_7_4_plotkin z h? hz gf (e q)
obtain <m, hm> :=
  theorem_7_4_plotkin z h? hz gu (e q U {pair j 0})
have hleft :
  funOf (funOf z gf) (e q) = Z r (e p) (e q) := by
  rw [hr]
  exact Z_graph_funOf r (e p) (e q)
have hright :
  funOf (funOf z gu) (e q U {pair j 0}) =
  Z m (e p) (e q) U {pair j m} := by
  rw [hm]
  simpa [j, gf, gu] using plotkin_finite_separation p q m
have herase := plotkinE_erase hout
have horbit : Z r (e p) (e q) = Z m (e p) (e q) := by
  rw [hleft, hright] at herase
  exact (eraseTag_Z_finite p q r).symm.trans
    (herase.trans (eraseTag_Z_finite_union p q m))
have hsigmaSub :
  funOf (funOf z (graph (sigmaJ j))) {pair j 0} subseq
  funOf (funOf z gu) (e q U {pair j 0}) := by
  exact mu_law
  (funOf_monotone_right z Set.subset_union_right)
  Set.subset_union_right
have htag : pair j n in Z m (e p) (e q) U {pair j m} := by
  rw [← hright]
  apply hsigmaSub
  rw [hn j]
  simp
have hnm : n = m := by
  rcases htag with hbad | htag
  * exact (Z_finite_no_tag p q m n (by simpa [j] using hbad)).elim
  * exact (pair_inj htag).2
rw [h? (e p), hleft, horbit, ← hnm]

theorem theorem_7_4_unique (z : Pomega)
  (h? : forall f, funOf z f = funOf z (graph (fun y => funOf f y)))
  (hz : forall A, (arrowE (arrowE A A) (arrowE A A)).mem z) :
  exists n, z = Zcomb n := by
obtain <n, hn> := theorem_7_4_sigma_index z h? hz
refine <n, ?_>
have hfinite (p : Nat) :
  funOf z (e p) = funOf (Zcomb n) (e p) := by
  let gp := graph (fun y => funOf (e p) y)
  have hgpGraph : gp = graph (fun y => funOf gp y) := by
    apply graph_ext
    intro y
    exact (normalized_finite_app p y).symm
have hgpMem : (arrowE emptyE emptyE).mem gp :=
  <hgpGraph, hgpGraph, fun _ _ h => False.elim h>
have hzgpGraph : funOf z gp = graph (fun y => funOf (funOf z gp) y) :=
  ((theorem_7_1 (arrowE emptyE emptyE) (arrowE emptyE emptyE)).2.1
    (hz emptyE) hgpMem).1
have hzFiniteGraph :
  funOf z (e p) = graph (fun y => funOf (funOf z (e p)) y) := by

```

```

    rw [h? (e p)]
    exact hzgpGraph
  apply graph_funOf_ext hzFiniteGraph (Zcomb_app_isGraph n (e p))
  intro x
  have hright :
    IsScottContinuous (fun y => Z n (e p) y) :=
      Z_isScottContinuous_right n (e p)
  have hleft :
    IsScottContinuous (fun y => funOf (funOf z (e p)) y) :=
      funOf_isScottContinuous (funOf z (e p))
  have heq := congrFun
    (isScottContinuous_determined hleft hright
      (fun q => theorem_7_4_finite z h? hz hn p q)) x
  simp [Zcomb_app2] using heq
  have hall (f : Pomega) : funOf z f = funOf (Zcomb n) f := by
    let gf := graph (fun y => funOf f y)
    have hgfGraph : gf = graph (fun y => funOf gf y) := by
      apply graph_ext
      intro y
      exact (beta (funOf_isScottContinuous f) y).symm
    have hgfMem : (arrowE emptyE emptyE).mem gf :=
      <hgfGraph, hgfGraph, fun _ _ h => False.elim h>
    have hzgfGraph : funOf z gf = graph (fun y => funOf (funOf z gf) y) :=
      ((theorem_7_1 (arrowE emptyE emptyE) (arrowE emptyE emptyE)).2.1
        (hz emptyE) hgfMem).1
    have hzfGraph :
      funOf z f = graph (fun y => funOf (funOf z f) y) := by
        rw [h? f]
        exact hzgfGraph
    apply graph_funOf_ext hzfGraph (Zcomb_app_isGraph n f)
    intro x
    have hleft :
      IsScottContinuous (fun g => funOf (funOf z g) x) :=
        theorem_1_3 (f := fun u => funOf u x) (g := funOf z)
          (funOf_isScottContinuous_left x)
          (funOf_isScottContinuous z)
    have hright : IsScottContinuous (fun g => Z n g x) :=
      Z_isScottContinuous_left n x
    have heq := congrFun
      (isScottContinuous_determined hleft hright (fun p => by
        have := congrArg (fun w => funOf w x) (hfinite p)
        simp [Zcomb_app2] using this)) f
    simp [Zcomb_app2] using heq
    exact graph_funOf_ext (hz emptyE).1 (Zcomb_isGraph n) hall

/-- **Scott 1976, Theorem 7.4 (The iterator theorem).**
The functionality is both satisfied by and globally characterizes the
iterators. -/
theorem theorem_7_4 :
  (forall A n, (arrowE (arrowE A A) (arrowE A A)).mem (Zcomb n)) /\
    forall z,
      (forall f, funOf z f = funOf z (graph (fun y => funOf f y))) ->
        (forall A, (arrowE (arrowE A A) (arrowE A A)).mem z) ->
          exists n, z = Zcomb n :=
    <theorem_7_4_i, theorem_7_4_unique>

theorem tensorR_diag_isScottContinuous :
  IsScottContinuous (fun z => tensorR z z) :=
  graph_const_isScottContinuous
    (fun z u =>
      pairSeq (funOf z (funOf u (ofNat 0))) (funOf z (funOf u (ofNat 1))))
    (fun u =>
      continuous_tuple

```

```

      (fun y => pairSeq_isScottContinuous_left y)
      (fun x => pairSeq_isScottContinuous_right x)
      (funOf_isScottContinuous_left (funOf u (ofNat 0)))
      (funOf_isScottContinuous_left (funOf u (ofNat 1))))

theorem plusR_right_isScottContinuous (a : Pomega) :
  IsScottContinuous (fun b => plusR a b) :=
  graph_const_isScottContinuous
    (fun b u =>
      dcondSet (funOf u (ofNat 0))
        (pairSeq (ofNat 0) (funOf a (funOf u (ofNat 1))))
        (pairSeq (ofNat 1) (funOf b (funOf u (ofNat 1)))))
    (fun u =>
      theorem_1_3
        (f := fun y =>
          dcondSet (funOf u (ofNat 0))
            (pairSeq (ofNat 0) (funOf a (funOf u (ofNat 1))))) y)

```

Lean 4 source (lines 2401–2800)

```

      (g := fun b => pairSeq (ofNat 1) (funOf b (funOf u (ofNat 1))))
      (dcondSet_isScottContinuous_right
        (funOf u (ofNat 0))
        (pairSeq (ofNat 0) (funOf a (funOf u (ofNat 1)))))
      (theorem_1_3 (pairSeq_isScottContinuous_right (ofNat 1))
        (funOf_isScottContinuous_left (funOf u (ofNat 1)))))

theorem treeF_isScottContinuous : IsScottContinuous treeF :=
  theorem_1_3 (f := fun b => plusR botElem b) (g := fun z => tensorR z z)
    (plusR_right_isScottContinuous botElem)
    tensorR_diag_isScottContinuous

/-- **Scott 1976, (4.38).** `tree = nil ? (tree ? tree)`. -/
theorem eq_4_38 : treeR = plusR botElem (tensorR treeR treeR) := by
  have hY : treeR = fix treeF := theorem_2_5 treeF_isScottContinuous
  have hfY : treeF treeR = treeR := by
    rw [hY]
    exact (theorem_1_4 treeF_isScottContinuous).1
  exact hfY.symm

/-- **Scott 1976, Theorem 4.6 applied to (4.38).** -/
theorem treeR_isRetract : IsRetract treeR :=
  (theorem_4_6 treeF_isScottContinuous (fun a ha =>
    plusR_isRetract bot_isRetract (tensorR_isRetract ha ha))).2

theorem treeR_fixedPoint : treeF treeR = treeR := by
  simpa [treeF] using eq_4_38.symm

theorem typed_bot_bot : typed botElem botElem := by
  change botElem = funOf botElem botElem
  rw [funOf_bot]

/-- **Scott 1976, after (4.38).** The atom `<0> : tree`. -/
theorem tree_atom : typed (pairSeq (ofNat 0) botElem) treeR := by
  rw [eq_4_38]
  exact plusR_typed_inl typed_bot_bot

/-- **Scott 1976, after (4.38).** Binary trees are in `tree`. -/
theorem tree_node {x y : Pomega} (hx : typed x treeR) (hy : typed y treeR) :
  typed (pairSeq (ofNat 1) (pairSeq x y)) treeR := by
  rw [eq_4_38]
  exact plusR_typed_inr ((typed_pairSeq_tensorR treeR treeR x y).mpr <hx, hy>)

/-- **Scott 1976, (4.43).** Modified LAMBDA terms for the `lamb` model. -/

```

```

inductive LambTerm where
| var : Nat -> LambTerm
| zero : LambTerm
| succ : LambTerm -> LambTerm
| pred : LambTerm -> LambTerm
| condq : LambTerm -> LambTerm -> LambTerm -> LambTerm -> LambTerm
| app : LambTerm -> LambTerm -> LambTerm
| lam : Nat -> LambTerm -> LambTerm

/-- **Scott 1976, (4.42)-(4.43).** Semantics  $\tau : env \rightarrow \text{lamb}.$  -/
def Hinterp : LambTerm -> Pomega -> Pomega
| .var n, t => funOf t (ofNat n)
| .zero, _ => funOf inleftC (ofNat 0)
| .succ tau, t =>
  condSet (funOf whichC (Hinterp tau t))
    (funOf inleftC (succSet (funOf outC (Hinterp tau t))))
  botElem
| .pred tau, t =>
  condSet (funOf whichC (Hinterp tau t))
    (funOf inleftC (predSet (funOf outC (Hinterp tau t))))
  botElem
| .condq ? tau sigma ?, t =>
  funOf lambR (condSet (funOf whichC (Hinterp ? t))
    (condSet (funOf outC (Hinterp ? t)) (Hinterp tau t) (Hinterp sigma t))
    (Hinterp ? t))
| .app tau sigma, t =>
  condSet (funOf whichC (Hinterp tau t)) botElem
    (funOf (funOf outC (Hinterp tau t)) (Hinterp sigma t))
| .lam n tau, t =>
  funOf inrightC (graph (fun x => Hinterp tau (updateEnv t x n)))

theorem arrowR_diag_isScottContinuous :
  IsScottContinuous (fun z => arrowR z z) := by
  apply graph_const_isScottContinuous
  intro u
  have h :
    IsScottContinuous (fun z =>
      graph (fun x => funOf z (funOf u (funOf z x)))) :=
    graph_const_isScottContinuous
      (fun z x => funOf z (funOf u (funOf z x)))
      (fun x =>
        continuous_tuple
          (fun y => funOf_isScottContinuous_left (funOf u (funOf y x)))
          (fun z =>
            theorem_1_3 (funOf_isScottContinuous z)
              (theorem_1_3 (funOf_isScottContinuous u)
                (funOf_isScottContinuous_left x)))
            id_isScottContinuous
            id_isScottContinuous)
  convert h using 1
  funext z
  apply graph_ext
  intro x
  simp only [comp_app]

theorem lambF_isScottContinuous : IsScottContinuous lambF :=
  theorem_1_3 (f := fun b => plusR intrR b) (g := fun z => arrowR z z)
    (plusR_right_isScottContinuous intrR)
    arrowR_diag_isScottContinuous

/-- **Scott 1976, Theorem 4.6 applied to (4.39).** -/
theorem lambR_isRetract : IsRetract lambR :=
  (theorem_4_6 lambF_isScottContinuous (fun a ha =>

```

```

plusR_isRetract intR_isRetract (arrowR_isRetract ha ha))).2

/-- **Scott 1976, (4.39).** `lamb = int ? (lamb comp -> lamb)` -/
theorem eq_4_39 : lambR = plusR intR (arrowR lambR lambR) := by
  have hY : lambR = fix lambF := theorem_2_5 lambF_isScottContinuous
  have hfix : lambF lambR = lambR := by
    rw [hY]
    exact (theorem_1_4 lambF_isScottContinuous).1
  exact hfix.symm

theorem lambR_fixedPoint : lambF lambR = lambR := by
  simpa [lambF] using eq_4_39.symm

theorem tagInj_isScottContinuous (i : Nat) :
  IsScottContinuous (tagInj i) :=
  pairSeq_isScottContinuous_right (ofNat i)

theorem seq4_isScottContinuous_each
  (a b c d : Pomega) :
  (IsScottContinuous fun x => seq4 x b c d) /\
  (IsScottContinuous fun y => seq4 a y c d) /\
  (IsScottContinuous fun z => seq4 a b z d) /\
  IsScottContinuous fun w => seq4 a b c w := by
  refine <?_, ?_, ?_, ?_>
  * exact graph_const_isScottContinuous
    (fun x z => condSet z x
      (condSet (predSet z) b
        (condSet (predSet (predSet z)) c
          (condSet (predSet^[3] z) d botElem))))
  (fun z => condSet_isScottContinuous_mid z _)
  * exact graph_const_isScottContinuous
    (fun y z => condSet z a
      (condSet (predSet z) y
        (condSet (predSet (predSet z)) c
          (condSet (predSet^[3] z) d botElem))))
  (fun z => theorem_1_3 (condSet_isScottContinuous_right z a)
    (condSet_isScottContinuous_mid (predSet z) _))
  * exact graph_const_isScottContinuous
    (fun z' t => condSet t a
      (condSet (predSet t) b
        (condSet (predSet (predSet t)) z'
          (condSet (predSet^[3] t) d botElem))))
  (fun t => theorem_1_3 (condSet_isScottContinuous_right t a)
    (theorem_1_3 (condSet_isScottContinuous_right (predSet t) b)
      (condSet_isScottContinuous_mid (predSet (predSet t)) _)))
  * exact graph_const_isScottContinuous
    (fun w t => condSet t a
      (condSet (predSet t) b
        (condSet (predSet (predSet t)) c
          (condSet (predSet^[3] t) w botElem))))
  (fun t => theorem_1_3 (condSet_isScottContinuous_right t a)
    (theorem_1_3 (condSet_isScottContinuous_right (predSet t) b)
      (theorem_1_3 (condSet_isScottContinuous_right (predSet (predSet t)) c)
        (condSet_isScottContinuous_mid (predSet^[3] t) botElem))))

theorem seq4_comp_isScottContinuous
  {f g h i : Pomega -> Pomega}
  (hf : IsScottContinuous f) (hg : IsScottContinuous g)
  (hh : IsScottContinuous h) (hi : IsScottContinuous i) :
  IsScottContinuous (fun u => seq4 (f u) (g u) (h u) (i u)) :=
  graph_const_isScottContinuous
    (fun u z =>
      condSet z (f u)

```

```

      (condSet (predSet z) (g u)
        (condSet (predSet (predSet z)) (h u)
          (condSet (predSet (predSet (predSet z))) (i u) botElem))))
(fun z =>
  continuous_nary
    (fun y t => condSet_isScottContinuous_left y t)
    (fun x t => condSet_isScottContinuous_mid x t)
    (fun x y => condSet_isScottContinuous_right x y)
    (const_isScottContinuous z) hf
    (continuous_nary
      (fun y t => condSet_isScottContinuous_left y t)
      (fun x t => condSet_isScottContinuous_mid x t)
      (fun x y => condSet_isScottContinuous_right x y)
      (const_isScottContinuous (predSet z)) hg
      (continuous_nary
        (fun y t => condSet_isScottContinuous_left y t)
        (fun x t => condSet_isScottContinuous_mid x t)
        (fun x y => condSet_isScottContinuous_right x y)
        (const_isScottContinuous (predSet (predSet z))) hh
        (continuous_nary
          (fun y t => condSet_isScottContinuous_left y t)
          (fun x t => condSet_isScottContinuous_mid x t)
          (fun x y => condSet_isScottContinuous_right x y)
          (const_isScottContinuous (predSet (predSet (predSet z))))
          hi (const_isScottContinuous botElem))))))

theorem tensor4_map_isScottContinuous (a b c d : Pomega) :
  IsScottContinuous (fun u =>
    seq4 (funOf a (funOf u (ofNat 0)))
      (funOf b (funOf u (ofNat 1)))
      (funOf c (funOf u (ofNat 2)))
      (funOf d (funOf u (ofNat 3)))) :=
  seq4_comp_isScottContinuous
    (theorem_1_3 (funOf_isScottContinuous a) (funOf_isScottContinuous_left (ofNat 0)))
    (theorem_1_3 (funOf_isScottContinuous b) (funOf_isScottContinuous_left (ofNat 1)))
    (theorem_1_3 (funOf_isScottContinuous c) (funOf_isScottContinuous_left (ofNat 2)))
    (theorem_1_3 (funOf_isScottContinuous d) (funOf_isScottContinuous_left (ofNat 3)))

theorem tensor4_app (a b c d u : Pomega) :
  funOf (tensor4 a b c d) u =
    seq4 (funOf a (funOf u (ofNat 0)))
      (funOf b (funOf u (ofNat 1)))
      (funOf c (funOf u (ofNat 2)))
      (funOf d (funOf u (ofNat 3))) :=
  beta (tensor4_map_isScottContinuous a b c d) u

theorem predSet_iterate_ofNat :
  forall k i, predSet^[k] (ofNat (k + i)) = ofNat i
| 0, i => by
  simp [Function.iterate_zero]
| k + 1, i => by
  rw [Function.iterate_succ_apply]
  have : k + 1 + i = k + i + 1 := by omega
  rw [this, predSet_ofNat_succ]
  exact predSet_iterate_ofNat k i

theorem predSet_iterate_self (k : Nat) :
  predSet^[k] (ofNat k) = ofNat 0 := by
  simpa using predSet_iterate_ofNat k 0

theorem plus7_map_isScottContinuous (a0 a1 a2 a3 a4 a5 a6 : Pomega) :
  IsScottContinuous (plus7Body a0 a1 a2 a3 a4 a5 a6) := by
  have htag (i : Nat) (a : Pomega) :

```

```

    IsScottContinuous (fun u => tagInj i (funOf a (funOf u (ofNat 1)))) :=
theorem_1_3 (tagInj_isScottContinuous i)
  (theorem_1_3 (funOf_isScottContinuous a)
    (funOf_isScottContinuous_left (ofNat 1)))
have hz : IsScottContinuous (fun u => funOf u (ofNat 0)) :=
  funOf_isScottContinuous_left (ofNat 0)
have hpred : forall k, IsScottContinuous
  (fun u => predSet^[k] (funOf u (ofNat 0))) := by
  intro k
  induction k with
  | zero => exact hz
  | succ k ih =>
    have h := theorem_1_3 (f := predSet)
      (g := fun u => predSet^[k] (funOf u (ofNat 0)))
      predSet_isScottContinuous ih
    convert h using 1
    funext u
    exact Function.iterate_succ_apply' predSet k (funOf u (ofNat 0))
refine continuous_nary
  (fun y z => dcondSet_isScottContinuous_left y z)
  (fun x z => dcondSet_isScottContinuous_mid x z)
  (fun x y => dcondSet_isScottContinuous_right x y)
hz (htag 0 a0)
(continuous_nary
  (fun y z => dcondSet_isScottContinuous_left y z)
  (fun x z => dcondSet_isScottContinuous_mid x z)
  (fun x y => dcondSet_isScottContinuous_right x y)
  (hpred 1) (htag 1 a1)
  (continuous_nary
    (fun y z => dcondSet_isScottContinuous_left y z)
    (fun x z => dcondSet_isScottContinuous_mid x z)
    (fun x y => dcondSet_isScottContinuous_right x y)
    (hpred 2) (htag 2 a2)
    (continuous_nary
      (fun y z => dcondSet_isScottContinuous_left y z)
      (fun x z => dcondSet_isScottContinuous_mid x z)
      (fun x y => dcondSet_isScottContinuous_right x y)
      (hpred 3) (htag 3 a3)
      (continuous_nary
        (fun y z => dcondSet_isScottContinuous_left y z)
        (fun x z => dcondSet_isScottContinuous_mid x z)
        (fun x y => dcondSet_isScottContinuous_right x y)
        (hpred 4) (htag 4 a4)
        (continuous_nary
          (fun y z => dcondSet_isScottContinuous_left y z)
          (fun x z => dcondSet_isScottContinuous_mid x z)
          (fun x y => dcondSet_isScottContinuous_right x y)
          (hpred 5) (htag 5 a5)
          (continuous_nary
            (fun y z => dcondSet_isScottContinuous_left y z)
            (fun x z => dcondSet_isScottContinuous_mid x z)
            (fun x y => dcondSet_isScottContinuous_right x y)
            (hpred 6) (htag 6 a6)
            (const_isScottContinuous topElem)))))))))

theorem plus7_app (a0 a1 a2 a3 a4 a5 a6 u : Pomega) :
  funOf (plus7 a0 a1 a2 a3 a4 a5 a6) u =
  plus7Body a0 a1 a2 a3 a4 a5 a6 u :=
  beta (plus7_map_isScottContinuous a0 a1 a2 a3 a4 a5 a6) u

theorem plus7_app_bot (a0 a1 a2 a3 a4 a5 a6 : Pomega) :
  funOf (plus7 a0 a1 a2 a3 a4 a5 a6) botElem = botElem := by
  rw [plus7_app, plus7Body, funOf_bot, dcondSet_bot]

```



```

theorem plus7_app_top (a0 a1 a2 a3 a4 a5 a6 : Pomega) :
  funOf (plus7 a0 a1 a2 a3 a4 a5 a6) topElem = topElem := by
  rw [plus7_app, plus7Body, funOf_top, dcondSet_top]

theorem tagInj_zero (i : Nat) (x : Pomega) :
  funOf (tagInj i x) (ofNat 0) = ofNat i :=
  pairSeq_app_zero (ofNat i) x

theorem tagInj_one (i : Nat) (x : Pomega) :
  funOf (tagInj i x) (ofNat 1) = x :=
  pairSeq_app_one (ofNat i) x

theorem plus7_app_tag0 (a0 a1 a2 a3 a4 a5 a6 x : Pomega) :
  funOf (plus7 a0 a1 a2 a3 a4 a5 a6) (tagInj 0 x) = tagInj 0 (funOf a0 x) := by
  rw [plus7_app, plus7Body, tagInj_zero, tagInj_one, dcondSet_ofNat_zero]

theorem plus7_app_tag1 (a0 a1 a2 a3 a4 a5 a6 x : Pomega) :
  funOf (plus7 a0 a1 a2 a3 a4 a5 a6) (tagInj 1 x) = tagInj 1 (funOf a1 x) := by
  rw [plus7_app, plus7Body, tagInj_zero, tagInj_one, predSet_ofNat_succ,
    dcondSet_ofNat_one, dcondSet_ofNat_zero]

theorem plus7_app_tag2 (a0 a1 a2 a3 a4 a5 a6 x : Pomega) :
  funOf (plus7 a0 a1 a2 a3 a4 a5 a6) (tagInj 2 x) = tagInj 2 (funOf a2 x) := by
  rw [plus7_app, plus7Body, tagInj_zero, tagInj_one, predSet_ofNat_succ,
    dcondSet_ofNat_succ, predSet_ofNat_succ, dcondSet_ofNat_one,
    dcondSet_ofNat_zero]

theorem plus7_app_tag3 (a0 a1 a2 a3 a4 a5 a6 x : Pomega) :
  funOf (plus7 a0 a1 a2 a3 a4 a5 a6) (tagInj 3 x) = tagInj 3 (funOf a3 x) := by
  rw [plus7_app, plus7Body, tagInj_zero, tagInj_one, dcondSet_ofNat_succ,
    predSet_ofNat_succ, dcondSet_ofNat_succ, predSet_ofNat_succ,
    dcondSet_ofNat_one, predSet_iterate_self, dcondSet_ofNat_zero]

theorem plus7_app_tag4 (a0 a1 a2 a3 a4 a5 a6 x : Pomega) :
  funOf (plus7 a0 a1 a2 a3 a4 a5 a6) (tagInj 4 x) = tagInj 4 (funOf a4 x) := by
  rw [plus7_app, plus7Body, tagInj_zero, tagInj_one, dcondSet_ofNat_succ,
    predSet_ofNat_succ, dcondSet_ofNat_succ, predSet_ofNat_succ,
    dcondSet_ofNat_succ, predSet_iterate_ofNat (k := 3) (i := 1),
    dcondSet_ofNat_one, predSet_iterate_self, dcondSet_ofNat_zero]

theorem plus7_app_tag5 (a0 a1 a2 a3 a4 a5 a6 x : Pomega) :
  funOf (plus7 a0 a1 a2 a3 a4 a5 a6) (tagInj 5 x) = tagInj 5 (funOf a5 x) := by
  rw [plus7_app, plus7Body, tagInj_zero, tagInj_one, dcondSet_ofNat_succ,
    predSet_ofNat_succ, dcondSet_ofNat_succ, predSet_ofNat_succ,
    dcondSet_ofNat_succ, predSet_iterate_ofNat (k := 3) (i := 2),
    dcondSet_ofNat_succ, predSet_iterate_ofNat (k := 4) (i := 1),
    dcondSet_ofNat_one, predSet_iterate_self, dcondSet_ofNat_zero]

theorem plus7_app_tag6 (a0 a1 a2 a3 a4 a5 a6 x : Pomega) :
  funOf (plus7 a0 a1 a2 a3 a4 a5 a6) (tagInj 6 x) = tagInj 6 (funOf a6 x) := by
  rw [plus7_app, plus7Body, tagInj_zero, tagInj_one, dcondSet_ofNat_succ,
    predSet_ofNat_succ, dcondSet_ofNat_succ, predSet_ofNat_succ,
    dcondSet_ofNat_succ, predSet_iterate_ofNat (k := 3) (i := 3),
    dcondSet_ofNat_succ, predSet_iterate_ofNat (k := 4) (i := 2),
    dcondSet_ofNat_succ, predSet_iterate_ofNat (k := 5) (i := 1),
    dcondSet_ofNat_one, predSet_iterate_self, dcondSet_ofNat_zero]

theorem seq4_body_isScottContinuous (a b c d : Pomega) :
  IsScottContinuous (fun z =>
    condSet z a
    (condSet (predSet z) b
      (condSet (predSet (predSet z)) c

```

```

      (condSet (predSet^[3] z) d botElem)))) :=
continuous_nary
  (fun y t => condSet_isScottContinuous_left y t)
  (fun x t => condSet_isScottContinuous_mid x t)
  (fun x y => condSet_isScottContinuous_right x y)
  id_isScottContinuous (const_isScottContinuous a)
  (continuous_nary
    (fun y t => condSet_isScottContinuous_left y t)
    (fun x t => condSet_isScottContinuous_mid x t)
    (fun x y => condSet_isScottContinuous_right x y)
    predSet_isScottContinuous (const_isScottContinuous b)
    (continuous_nary
      (fun y t => condSet_isScottContinuous_left y t)
      (fun x t => condSet_isScottContinuous_mid x t)
      (fun x y => condSet_isScottContinuous_right x y)
      (theorem_1_3 (f := predSet) (g := predSet)
        predSet_isScottContinuous predSet_isScottContinuous)
      (const_isScottContinuous c)
      (continuous_nary
        (fun y t => condSet_isScottContinuous_left y t)
        (fun x t => condSet_isScottContinuous_mid x t)
        (fun x y => condSet_isScottContinuous_right x y)
        (theorem_1_3 (f := predSet)
          (g := fun z => predSet (predSet z))
          predSet_isScottContinuous
          (theorem_1_3 (f := predSet) (g := predSet)
            predSet_isScottContinuous predSet_isScottContinuous))
        (const_isScottContinuous d) (const_isScottContinuous botElem))))))

theorem seq4_app (a b c d z : Pomega) :
  funOf (seq4 a b c d) z =
    condSet z a
      (condSet (predSet z) b
        (condSet (predSet (predSet z)) c
          (condSet (predSet^[3] z) d botElem)))) :=
  beta (seq4_body_isScottContinuous a b c d) z

theorem seq4_app_zero (a b c d : Pomega) :
  funOf (seq4 a b c d) (ofNat 0) = a := by
  rw [seq4_app, condSet_ofNat_zero]

```

Lean 4 source (lines 2801–3200)

```

theorem seq4_app_one (a b c d : Pomega) :
  funOf (seq4 a b c d) (ofNat 1) = b := by
  rw [seq4_app, condSet_ofNat_one, predSet_ofNat_succ, condSet_ofNat_zero]

theorem seq4_app_two (a b c d : Pomega) :
  funOf (seq4 a b c d) (ofNat 2) = c := by
  rw [seq4_app, condSet_ofNat_succ, predSet_ofNat_succ, condSet_ofNat_one,
    predSet_ofNat_succ, condSet_ofNat_zero]

theorem seq4_app_three (a b c d : Pomega) :
  funOf (seq4 a b c d) (ofNat 3) = d := by
  rw [seq4_app, condSet_ofNat_succ, predSet_ofNat_succ, condSet_ofNat_succ,
    predSet_ofNat_succ, condSet_ofNat_one, predSet_iterate_self,
    condSet_ofNat_zero]

theorem tensor4_isRetract {a b c d : Pomega}
  (ha : IsRetract a) (hb : IsRetract b) (hc : IsRetract c) (hd : IsRetract d) :
  IsRetract (tensor4 a b c d) := by
  change tensor4 a b c d =
    graph (fun u => funOf (tensor4 a b c d) (funOf (tensor4 a b c d) u))
  apply graph_ext

```

```

intro u
rw [tensor4_app, tensor4_app, seq4_app_zero, seq4_app_one, seq4_app_two,
    seq4_app_three, retract_app ha, retract_app hb, retract_app hc, retract_app hd]

theorem plus7_isRetract {a0 a1 a2 a3 a4 a5 a6 : Pomega}
  (h0 : IsRetract a0) (h1 : IsRetract a1) (h2 : IsRetract a2)
  (h3 : IsRetract a3) (h4 : IsRetract a4) (h5 : IsRetract a5)
  (h6 : IsRetract a6) :
  IsRetract (plus7 a0 a1 a2 a3 a4 a5 a6) := by
change plus7 a0 a1 a2 a3 a4 a5 a6 =
  graph (fun u => funOf (plus7 a0 a1 a2 a3 a4 a5 a6)
    (funOf (plus7 a0 a1 a2 a3 a4 a5 a6) u))
apply graph_ext
intro u
rw [plus7_app, plus7_app]
have hbody0 (x : Pomega) :
  plus7Body a0 a1 a2 a3 a4 a5 a6 (tagInj 0 x) = tagInj 0 (funOf a0 x) := by
  rw [plus7Body, tagInj_zero, tagInj_one, dcondSet_ofNat_zero]
have hbody1 (x : Pomega) :
  plus7Body a0 a1 a2 a3 a4 a5 a6 (tagInj 1 x) = tagInj 1 (funOf a1 x) := by
  rw [plus7Body, tagInj_zero, tagInj_one, predSet_ofNat_succ,
      dcondSet_ofNat_one, dcondSet_ofNat_zero]
have hbody2 (x : Pomega) :
  plus7Body a0 a1 a2 a3 a4 a5 a6 (tagInj 2 x) = tagInj 2 (funOf a2 x) := by
  rw [plus7Body, tagInj_zero, tagInj_one, predSet_ofNat_succ,
      dcondSet_ofNat_succ, predSet_ofNat_succ, dcondSet_ofNat_one,
      dcondSet_ofNat_zero]
have hbody3 (x : Pomega) :
  plus7Body a0 a1 a2 a3 a4 a5 a6 (tagInj 3 x) = tagInj 3 (funOf a3 x) := by
  rw [plus7Body, tagInj_zero, tagInj_one, dcondSet_ofNat_succ,
      predSet_ofNat_succ, dcondSet_ofNat_succ, predSet_ofNat_succ,
      dcondSet_ofNat_one, predSet_iterate_self, dcondSet_ofNat_zero]
have hbody4 (x : Pomega) :
  plus7Body a0 a1 a2 a3 a4 a5 a6 (tagInj 4 x) = tagInj 4 (funOf a4 x) := by
  rw [plus7Body, tagInj_zero, tagInj_one, dcondSet_ofNat_succ,
      predSet_ofNat_succ, dcondSet_ofNat_succ, predSet_ofNat_succ,
      dcondSet_ofNat_succ, predSet_iterate_ofNat (k := 3) (i := 1),
      dcondSet_ofNat_one, predSet_iterate_self, dcondSet_ofNat_zero]
have hbody5 (x : Pomega) :
  plus7Body a0 a1 a2 a3 a4 a5 a6 (tagInj 5 x) = tagInj 5 (funOf a5 x) := by
  rw [plus7Body, tagInj_zero, tagInj_one, dcondSet_ofNat_succ,
      predSet_ofNat_succ, dcondSet_ofNat_succ, predSet_ofNat_succ,
      dcondSet_ofNat_succ, predSet_iterate_ofNat (k := 3) (i := 2),
      dcondSet_ofNat_succ, predSet_iterate_ofNat (k := 4) (i := 1),
      dcondSet_ofNat_one, predSet_iterate_self, dcondSet_ofNat_zero]
have hbody6 (x : Pomega) :
  plus7Body a0 a1 a2 a3 a4 a5 a6 (tagInj 6 x) = tagInj 6 (funOf a6 x) := by
  rw [plus7Body, tagInj_zero, tagInj_one, dcondSet_ofNat_succ,
      predSet_ofNat_succ, dcondSet_ofNat_succ, predSet_ofNat_succ,
      dcondSet_ofNat_succ, predSet_iterate_ofNat (k := 3) (i := 3),
      dcondSet_ofNat_succ, predSet_iterate_ofNat (k := 4) (i := 2),
      dcondSet_ofNat_succ, predSet_iterate_ofNat (k := 5) (i := 1),
      dcondSet_ofNat_one, predSet_iterate_self, dcondSet_ofNat_zero]
have hbodyTop : plus7Body a0 a1 a2 a3 a4 a5 a6 topElem = topElem := by
  rw [plus7Body, funOf_top, dcondSet_top]
have hbodyBot : plus7Body a0 a1 a2 a3 a4 a5 a6 botElem = botElem := by
  rw [plus7Body, funOf_bot, dcondSet_bot]
rcases dcondSet_cases (funOf u (ofNat 0)) with hz | hz | hz | hz
* have hL : plus7Body a0 a1 a2 a3 a4 a5 a6 u =
  tagInj 0 (funOf a0 (funOf u (ofNat 1))) := by
  rw [plus7Body, dcondSet_of_zero_not_pos hz.1 hz.2]
  rw [hL, hbody0, retract_app h0]
* rw [plus7Body, dcondSet_of_pos_not_zero hz.1 hz.2]

```

```

rcases dcondSet_cases (predSet (funOf u (ofNat 0))) with hz1 | hz1 | hz1 | hz1
* rw [dcondSet_of_zero_not_pos hz1.1 hz1.2, hbody1, retract_app h1]
* rw [dcondSet_of_pos_not_zero hz1.1 hz1.2]
rcases dcondSet_cases (predSet (predSet (funOf u (ofNat 0)))) with
  hz2 | hz2 | hz2 | hz2
* rw [dcondSet_of_zero_not_pos hz2.1 hz2.2, hbody2, retract_app h2]
* rw [dcondSet_of_pos_not_zero hz2.1 hz2.2]
rcases dcondSet_cases (predSet^[3] (funOf u (ofNat 0))) with
  hz3 | hz3 | hz3 | hz3
* rw [dcondSet_of_zero_not_pos hz3.1 hz3.2, hbody3, retract_app h3]
* rw [dcondSet_of_pos_not_zero hz3.1 hz3.2]
rcases dcondSet_cases (predSet^[4] (funOf u (ofNat 0))) with
  hz4 | hz4 | hz4 | hz4
* rw [dcondSet_of_zero_not_pos hz4.1 hz4.2, hbody4, retract_app h4]
* rw [dcondSet_of_pos_not_zero hz4.1 hz4.2]
rcases dcondSet_cases (predSet^[5] (funOf u (ofNat 0))) with
  hz5 | hz5 | hz5 | hz5
* rw [dcondSet_of_zero_not_pos hz5.1 hz5.2, hbody5, retract_app h5]
* rw [dcondSet_of_pos_not_zero hz5.1 hz5.2]
rcases dcondSet_cases (predSet^[6] (funOf u (ofNat 0))) with
  hz6 | hz6 | hz6 | hz6
* rw [dcondSet_of_zero_not_pos hz6.1 hz6.2, hbody6, retract_app h6]
* rw [dcondSet_of_pos_not_zero hz6.1 hz6.2, hbodyTop]
* rw [dcondSet_of_mixed hz6.1 hz6.2, hbodyTop]
* rw [dcondSet_of_empty hz6.1 hz6.2, hbodyBot]
* rw [dcondSet_of_mixed hz5.1 hz5.2, hbodyTop]
* rw [dcondSet_of_empty hz5.1 hz5.2, hbodyBot]
* rw [dcondSet_of_mixed hz4.1 hz4.2, hbodyTop]
* rw [dcondSet_of_empty hz4.1 hz4.2, hbodyBot]
* rw [dcondSet_of_mixed hz3.1 hz3.2, hbodyTop]
* rw [dcondSet_of_empty hz3.1 hz3.2, hbodyBot]
* rw [dcondSet_of_mixed hz2.1 hz2.2, hbodyTop]
* rw [dcondSet_of_empty hz2.1 hz2.2, hbodyBot]
* rw [dcondSet_of_mixed hz1.1 hz1.2, hbodyTop]
* rw [dcondSet_of_empty hz1.1 hz1.2, hbodyBot]
* rw [plus7Body, dcondSet_of_mixed hz.1 hz.2, hbodyTop]
* rw [plus7Body, dcondSet_of_empty hz.1 hz.2, hbodyBot]

theorem tensor4_diag_isScottContinuous :
  IsScottContinuous (fun z => tensor4 z z z z) :=
graph_const_isScottContinuous
  (fun z u =>
    seq4 (funOf z (funOf u (ofNat 0)))
      (funOf z (funOf u (ofNat 1)))
      (funOf z (funOf u (ofNat 2)))
      (funOf z (funOf u (ofNat 3))))
  (fun u =>
    seq4_comp_isScottContinuous
      (funOf_isScottContinuous_left (funOf u (ofNat 0)))
      (funOf_isScottContinuous_left (funOf u (ofNat 1)))
      (funOf_isScottContinuous_left (funOf u (ofNat 2)))
      (funOf_isScottContinuous_left (funOf u (ofNat 3))))

theorem tensorR_right_isScottContinuous (a : Pomega) :
  IsScottContinuous (fun b => tensorR a b) :=
graph_const_isScottContinuous
  (fun b u =>
    pairSeq (funOf a (funOf u (ofNat 0))) (funOf b (funOf u (ofNat 1))))
  (fun u =>
    theorem_1_3
      (f := fun y => pairSeq (funOf a (funOf u (ofNat 0))) y)
      (g := fun b => funOf b (funOf u (ofNat 1)))
      (pairSeq_isScottContinuous_right (funOf a (funOf u (ofNat 0))))

```

```

      (funOf_isScottContinuous_left (funOf u (ofNat 1))))

theorem plus7_comp_isScottContinuous
  {f0 f1 f2 f3 f4 f5 f6 : Pomega -> Pomega}
  (h0 : IsScottContinuous f0) (h1 : IsScottContinuous f1)
  (h2 : IsScottContinuous f2) (h3 : IsScottContinuous f3)
  (h4 : IsScottContinuous f4) (h5 : IsScottContinuous f5)
  (h6 : IsScottContinuous f6) :
  IsScottContinuous (fun z =>
    plus7 (f0 z) (f1 z) (f2 z) (f3 z) (f4 z) (f5 z) (f6 z)) :=
graph_const_isScottContinuous
  (fun z u => plus7Body (f0 z) (f1 z) (f2 z) (f3 z) (f4 z) (f5 z) (f6 z) u)
  (fun u => by
    have htag (i : Nat) {f : Pomega -> Pomega} (hf : IsScottContinuous f) :
      IsScottContinuous (fun z =>
        tagInj i (funOf (f z) (funOf u (ofNat 1)))) :=
      theorem_1_3 (f := tagInj i)
      (g := fun z => funOf (f z) (funOf u (ofNat 1)))
      (tagInj_isScottContinuous i)
      (theorem_1_3 (f := fun w => funOf w (funOf u (ofNat 1))) (g := f)
        (funOf_isScottContinuous_left (funOf u (ofNat 1))) hf)
    exact continuous_nary
      (fun y t => dcondSet_isScottContinuous_left y t)
      (fun x t => dcondSet_isScottContinuous_mid x t)
      (fun x y => dcondSet_isScottContinuous_right x y)
      (const_isScottContinuous (funOf u (ofNat 0))) (htag 0 h0)
      (continuous_nary
        (fun y t => dcondSet_isScottContinuous_left y t)
        (fun x t => dcondSet_isScottContinuous_mid x t)
        (fun x y => dcondSet_isScottContinuous_right x y)
        (const_isScottContinuous (predSet (funOf u (ofNat 0)))) (htag 1 h1)
        (continuous_nary
          (fun y t => dcondSet_isScottContinuous_left y t)
          (fun x t => dcondSet_isScottContinuous_mid x t)
          (fun x y => dcondSet_isScottContinuous_right x y)
          (const_isScottContinuous (predSet (predSet (funOf u (ofNat 0)))))
          (htag 2 h2)
          (continuous_nary
            (fun y t => dcondSet_isScottContinuous_left y t)
            (fun x t => dcondSet_isScottContinuous_mid x t)
            (fun x y => dcondSet_isScottContinuous_right x y)
            (const_isScottContinuous (predSet^[3] (funOf u (ofNat 0))))
            (htag 3 h3)
            (continuous_nary
              (fun y t => dcondSet_isScottContinuous_left y t)
              (fun x t => dcondSet_isScottContinuous_mid x t)
              (fun x y => dcondSet_isScottContinuous_right x y)
              (const_isScottContinuous (predSet^[4] (funOf u (ofNat 0))))
              (htag 4 h4)
              (continuous_nary
                (fun y t => dcondSet_isScottContinuous_left y t)
                (fun x t => dcondSet_isScottContinuous_mid x t)
                (fun x y => dcondSet_isScottContinuous_right x y)
                (const_isScottContinuous (predSet^[5] (funOf u (ofNat 0))))
                (htag 5 h5)
                (continuous_nary
                  (fun y t => dcondSet_isScottContinuous_left y t)
                  (fun x t => dcondSet_isScottContinuous_mid x t)
                  (fun x y => dcondSet_isScottContinuous_right x y)
                  (const_isScottContinuous (predSet^[6] (funOf u (ofNat 0))))
                  (htag 6 h6) (const_isScottContinuous topElem))))))))))

theorem expF_isScottContinuous : IsScottContinuous expF :=

```

```

plus7_comp_isScottContinuous
  (const_isScottContinuous intR)
  (const_isScottContinuous botElem)
  id_isScottContinuous
  id_isScottContinuous
  tensor4_diag_isScottContinuous
  tensorR_diag_isScottContinuous
  (tensorR_right_isScottContinuous intR)

/-- **Scott 1976, (4.44).** `exp` is the least fixed point of the seven-tag
syntax functor. -/
theorem eq_4_44 : expR = expF expR := by
  have hY : expR = fix expF := theorem_2_5 expF_isScottContinuous
  have hfix : expF expR = expR := by
    rw [hY]
    exact (theorem_1_4 expF_isScottContinuous).1
  exact hfix.symm

/-- **Scott 1976, Theorem 4.6 applied to (4.44).** -/
theorem expR_isRetract : IsRetract expR :=
  (theorem_4_6 expF_isScottContinuous (fun a ha =>
    plus7_isRetract intR_isRetract bot_isRetract ha ha
      (tensor4_isRetract ha ha ha ha) (tensorR_isRetract ha ha)
      (tensorR_isRetract intR_isRetract ha))) .2

theorem plus7_typed_inl0 {a0 a1 a2 a3 a4 a5 a6 x : Pomega} (hx : typed x a0) :
  typed (tagInj 0 x) (plus7 a0 a1 a2 a3 a4 a5 a6) := by
  rw [typed, plus7_app_tag0, <- hx]

theorem plus7_typed_inl1 {a0 a1 a2 a3 a4 a5 a6 x : Pomega} (hx : typed x a1) :
  typed (tagInj 1 x) (plus7 a0 a1 a2 a3 a4 a5 a6) := by
  rw [typed, plus7_app_tag1, <- hx]

theorem plus7_typed_inl2 {a0 a1 a2 a3 a4 a5 a6 x : Pomega} (hx : typed x a2) :
  typed (tagInj 2 x) (plus7 a0 a1 a2 a3 a4 a5 a6) := by
  rw [typed, plus7_app_tag2, <- hx]

theorem plus7_typed_inl3 {a0 a1 a2 a3 a4 a5 a6 x : Pomega} (hx : typed x a3) :
  typed (tagInj 3 x) (plus7 a0 a1 a2 a3 a4 a5 a6) := by
  rw [typed, plus7_app_tag3, <- hx]

theorem plus7_typed_inl4 {a0 a1 a2 a3 a4 a5 a6 x : Pomega} (hx : typed x a4) :
  typed (tagInj 4 x) (plus7 a0 a1 a2 a3 a4 a5 a6) := by
  rw [typed, plus7_app_tag4, <- hx]

theorem plus7_typed_inl5 {a0 a1 a2 a3 a4 a5 a6 x : Pomega} (hx : typed x a5) :
  typed (tagInj 5 x) (plus7 a0 a1 a2 a3 a4 a5 a6) := by
  rw [typed, plus7_app_tag5, <- hx]

theorem plus7_typed_inl6 {a0 a1 a2 a3 a4 a5 a6 x : Pomega} (hx : typed x a6) :
  typed (tagInj 6 x) (plus7 a0 a1 a2 a3 a4 a5 a6) := by
  rw [typed, plus7_app_tag6, <- hx]

/-- **Scott 1976, (4.44).** Abstract-syntax encoding of a `LambTerm`. -/
def encodeExp : LambTerm -> Pomega
| .var n => tagInj 0 (ofNat n)
| .zero => tagInj 1 botElem
| .succ tau => tagInj 2 (encodeExp tau)
| .pred tau => tagInj 3 (encodeExp tau)
| .condq ? tau sigma ? =>
  tagInj 4 (seq4 (encodeExp ?) (encodeExp tau) (encodeExp sigma) (encodeExp ?))
| .app tau sigma => tagInj 5 (pairSeq (encodeExp tau) (encodeExp sigma))
| .lam n tau => tagInj 6 (pairSeq (ofNat n) (encodeExp tau))

```

```

theorem typed_ofNat_intR (n : Nat) : typed (ofNat n) intR :=
  (intR_ofNat n).symm

theorem typed_bot_botElem : typed botElem botElem := by
  change botElem = funOf botElem botElem
  rw [funOf_bot]

theorem envR_map_isScottContinuous :
  IsScottContinuous (fun t => graph (fun n => funOf lambR (funOf t n))) :=
  graph_const_isScottContinuous
  (fun t n => funOf lambR (funOf t n))
  (fun n => theorem_1_3 (funOf_isScottContinuous lambR)
    (funOf_isScottContinuous_left n))

theorem envR_app (t : Pomega) :
  funOf envR t = graph (fun n => funOf lambR (funOf t n)) :=
  beta envR_map_isScottContinuous t

theorem envR_isRetract : IsRetract envR := by
  change envR = graph (fun t => funOf envR (funOf envR t))
  apply graph_ext
  intro t
  rw [envR_app, envR_app]
  apply graph_ext
  intro n
  have hb : funOf (graph (fun m => funOf lambR (funOf t m))) n =
    funOf lambR (funOf t n) :=
    beta (theorem_1_3 (funOf_isScottContinuous lambR)
      (funOf_isScottContinuous t)) n
  rw [hb, retract_app lambR_isRetract]

theorem typed_env_nth {t : Pomega} (ht : typed t envR) (n : Nat) :
  typed (funOf t (ofNat n)) lambR := by
  have ht' : t = graph (fun m => funOf lambR (funOf t m)) := by
    simpa [typed, envR_app] using ht
  have : funOf t (ofNat n) = funOf lambR (funOf t (ofNat n)) := by
    nth_rw 1 [ht']
  exact beta (theorem_1_3 (funOf_isScottContinuous lambR)
    (funOf_isScottContinuous t)) (ofNat n)
  exact this

theorem typed_apply_retract {a x : Pomega} (ha : IsRetract a) :
  typed (funOf a x) a :=
  (retract_app ha x).symm

theorem typed_inleft_int_lamb {x : Pomega} (hx : typed x intR) :
  typed (funOf inleftC x) lambR := by
  rw [eq_4_39, inleftC_app]
  exact plusR_typed_inl hx

theorem typed_inright_arrow_lamb {x : Pomega}
  (hx : typed x (arrowR lambR lambR)) :
  typed (funOf inrightC x) lambR := by
  rw [eq_4_39, inrightC_app]
  exact plusR_typed_inr hx

theorem typed_bot_lamb : typed botElem lambR := by
  rw [eq_4_39]
  exact plusR_typed_bot _ _

theorem whichC_app (u : Pomega) : funOf whichC u = funOf u (ofNat 0) :=
  fstC_app u

```

```

theorem outC_app (u : Pomega) : funOf outC u = funOf u (ofNat 1) :=
  sndC_app u

theorem encodeExp_typed : forall tau : LambTerm, typed (encodeExp tau) expR := by
  intro tau
  induction tau with
  | var n =>
    rw [encodeExp, eq_4_44]
    exact plus7_typed_inl0 (typed_ofNat_intR n)
  | zero =>
    rw [encodeExp, eq_4_44]
    exact plus7_typed_inl1 typed_bot_botElem
  | succ tau ih =>
    rw [encodeExp, eq_4_44]
    exact plus7_typed_inl2 ih
  | pred tau ih =>
    rw [encodeExp, eq_4_44]
    exact plus7_typed_inl3 ih
  | condq ? tau sigma ? ih? ihtau ihsigma ih? =>
    rw [encodeExp, eq_4_44]
    refine plus7_typed_inl4 ?_
    rw [typed, tensor4_app, seq4_app_zero, seq4_app_one, seq4_app_two,
      seq4_app_three, <- ih?, <- ihtau, <- ihsigma, <- ih?]
  | app tau sigma ihtau ihsigma =>
    rw [encodeExp, eq_4_44]
    refine plus7_typed_inl5 ?_
    exact (typed_pairSeq_tensorR expR expR _ _).mpr <ihtau, ihsigma>
  | lam n tau ih =>
    rw [encodeExp, eq_4_44]
    refine plus7_typed_inl6 ?_
    exact (typed_pairSeq_tensorR intR expR _ _).mpr <typed_ofNat_intR n, ih>

theorem Hinterp_isScottContinuous (tau : LambTerm) :
  IsScottContinuous (Hinterp tau) := by
  induction tau with
  | var n =>
    exact funOf_isScottContinuous_left (ofNat n)
  | zero =>
    exact const_isScottContinuous _
  | succ tau ih =>
    exact continuous_nary
      (fun y z => condSet_isScottContinuous_left y z)
      (fun x z => condSet_isScottContinuous_mid x z)
      (fun x y => condSet_isScottContinuous_right x y)
      (theorem_1_3 (funOf_isScottContinuous whichC) ih)
      (theorem_1_3 (funOf_isScottContinuous inleftC)
        (theorem_1_3 succSet_isScottContinuous
          (theorem_1_3 (funOf_isScottContinuous outC) ih)))
      (const_isScottContinuous botElem)
  | pred tau ih =>
    exact continuous_nary
      (fun y z => condSet_isScottContinuous_left y z)
      (fun x z => condSet_isScottContinuous_mid x z)
      (fun x y => condSet_isScottContinuous_right x y)
      (theorem_1_3 (funOf_isScottContinuous whichC) ih)
      (theorem_1_3 (funOf_isScottContinuous inleftC)
        (theorem_1_3 predSet_isScottContinuous
          (theorem_1_3 (funOf_isScottContinuous outC) ih)))
      (const_isScottContinuous botElem)
  | condq ? tau sigma ? ih? ihtau ihsigma ih? =>
    exact theorem_1_3 (f := funOf lambR)
    (g := fun t =>

```



```

condSet (funOf whichC (Hinterp ? t))

Lean 4 source (lines 3201–3600)

    (condSet (funOf outC (Hinterp ? t)) (Hinterp tau t) (Hinterp sigma t))
    (Hinterp ? t))
  (funOf_isScottContinuous lambR)
  (continuous_nary
    (fun y z => condSet_isScottContinuous_left y z)
    (fun x z => condSet_isScottContinuous_mid x z)
    (fun x y => condSet_isScottContinuous_right x y)
    (theorem_1_3 (funOf_isScottContinuous whichC) ih?)
    (continuous_nary
      (fun y z => condSet_isScottContinuous_left y z)
      (fun x z => condSet_isScottContinuous_mid x z)
      (fun x y => condSet_isScottContinuous_right x y)
      (theorem_1_3 (funOf_isScottContinuous outC) ih?) ihtau ihsigma)
    ihtau)
| app tau sigma ihtau ihsigma =>
  exact continuous_nary
    (fun y z => condSet_isScottContinuous_left y z)
    (fun x z => condSet_isScottContinuous_mid x z)
    (fun x y => condSet_isScottContinuous_right x y)
    (theorem_1_3 (funOf_isScottContinuous whichC) ihtau)
    (const_isScottContinuous botElem)
    (continuous_tuple
      (fun y => funOf_isScottContinuous_left y)
      (fun u => funOf_isScottContinuous u)
      (theorem_1_3 (funOf_isScottContinuous outC) ihtau) ihsigma)
| lam n tau ih =>
  exact theorem_1_3 (f := funOf inrightC)
    (g := fun t => graph (fun x => Hinterp tau (updateEnv t x n)))
    (funOf_isScottContinuous inrightC)
    (graph_const_isScottContinuous
      (fun t x => Hinterp tau (updateEnv t x n))
      (fun x => theorem_1_3 ih
        (graph_const_isScottContinuous
          (fun t m => if m = ofNat n then x else funOf t m)
          (fun m => by
            by_cases h : m = ofNat n
            * simpa [h] using const_isScottContinuous (c := x)
            * simpa [h] using funOf_isScottContinuous_left m))))))

/-- **Scott 1976, (4.45).** `??tau?` as a map `env -> lamb`. -/
def Htyped (tau : LambTerm) : Pomega :=
  funOf (arrowR envR lambR) (graph (Hinterp tau))

theorem Htyped_app (tau : LambTerm) (t : Pomega) :
  funOf (Htyped tau) t = funOf lambR (Hinterp tau (funOf envR t)) := by
  rw [Htyped, arrowR_app]
  simp only [comp_app]
  apply congrArg (funOf lambR)
  exact beta (Hinterp_isScottContinuous tau) (funOf envR t)

theorem Htyped_typed (tau : LambTerm) :
  typed (Htyped tau) (arrowR envR lambR) :=
  typed_apply_retract
    (arrowR_isRetract envR_isRetract lambR_isRetract)

/-- Tag and payload of a seven-sum abstract-syntax code. -/
def expTag (e : Pomega) : Pomega := funOf e (ofNat 0)

def expPayload (e : Pomega) : Pomega := funOf e (ofNat 1)

```

```

/-- Recursive call of a candidate `?` on a subexpression. -/
def hApply (H e t : Pomega) : Pomega := funOf (funOf H e) t

/-- Environment update continuous in the index: on `n = {n}` this is
`x[n]`; on a larger index it unions the corresponding updates. -/
def updateEnvUnion (t x idx : Pomega) : Pomega :=
  minExtend (fun n => updateEnv t x n) idx

theorem updateEnvUnion_ofNat (t x : Pomega) (n : Nat) :
  updateEnvUnion t x (ofNat n) = updateEnv t x n := by
  ext k
  constructor
  * intro hk
    obtain <m, hm, hkm> := Set.mem_iUnion_2.mp hk
    have : m = n := by
      simpa [ofNat, Set.singleton_subset_iff] using hm
    subst m
    exact hkm
  * intro hk
    exact Set.mem_iUnion_2.mpr <n, by simp [ofNat], hk>

theorem updateEnvUnion_isScottContinuous_idx (t x : Pomega) :
  IsScottContinuous (updateEnvUnion t x) :=
  minExtend_isScottContinuous (fun n => updateEnv t x n)

theorem updateEnv_isScottContinuous_t (x : Pomega) (n : Nat) :
  IsScottContinuous (fun t => updateEnv t x n) :=
  graph_const_isScottContinuous
    (fun t m => if m = ofNat n then x else funOf t m)
    (fun m => by
      by_cases h : m = ofNat n
      * simpa [h] using const_isScottContinuous (c := x)
      * simpa [h] using funOf_isScottContinuous_left m)

theorem updateEnvUnion_isScottContinuous_t (x idx : Pomega) :
  IsScottContinuous (fun t => updateEnvUnion t x idx) := by
  intro t
  ext k
  constructor
  * intro hk
    obtain <n, hn, hkn> := Set.mem_iUnion_2.mp hk
    have : k in scottUnion (fun t => updateEnv t x n) t := by
      rw [← updateEnv_isScottContinuous_t x n t]; exact hkn
    obtain <m, hm, hkm> := mem_scottUnion.mp this
    exact mem_scottUnion.mpr <m, hm, Set.mem_iUnion_2.mpr <n, hn, hkm>>
  * intro hk
    obtain <m, hm, hkm> := mem_scottUnion.mp hk
    obtain <n, hn, hkn> := Set.mem_iUnion_2.mp hkm
    exact Set.mem_iUnion_2.mpr <n, hn,
      isScottContinuous_monotone (updateEnv_isScottContinuous_t x n) hm hkn>

def hVar (e t : Pomega) : Pomega := funOf t (expPayload e)

def hZero : Pomega := funOf inleftC (ofNat 0)

def hSucc (H e t : Pomega) : Pomega :=
  condSet (funOf whichC (hApply H (expPayload e) t))
    (funOf inleftC (succSet (funOf outC (hApply H (expPayload e) t))))
    botElem

def hPred (H e t : Pomega) : Pomega :=
  condSet (funOf whichC (hApply H (expPayload e) t))
    (funOf inleftC (predSet (funOf outC (hApply H (expPayload e) t))))

```

```

botElem

def hCond (H e t : Pomega) : Pomega :=
  funOf lambR
    (condSet (funOf whichC (hApply H (funOf (expPayload e) (ofNat 0)) t))
      (condSet (funOf outC (hApply H (funOf (expPayload e) (ofNat 0)) t))
        (hApply H (funOf (expPayload e) (ofNat 1)) t)
        (hApply H (funOf (expPayload e) (ofNat 2)) t))
      (hApply H (funOf (expPayload e) (ofNat 3)) t))

def hApp (H e t : Pomega) : Pomega :=
  condSet (funOf whichC (hApply H (funOf (expPayload e) (ofNat 0)) t)) botElem
    (funOf (funOf outC (hApply H (funOf (expPayload e) (ofNat 0)) t))
      (hApply H (funOf (expPayload e) (ofNat 1)) t))

def hLam (H e t : Pomega) : Pomega :=
  funOf inrightC
    (graph (fun x =>
      hApply H (funOf (expPayload e) (ofNat 1))
        (updateEnvUnion t x (funOf (expPayload e) (ofNat 0)))))

/-- One continuous step of (4.43), dispatched on the (4.44) tags. -/
def Hstep (H e t : Pomega) : Pomega :=
  dcondSet (expTag e) (hVar e t)
    (dcondSet (predSet (expTag e)) hZero
      (dcondSet (predSet (predSet (expTag e))) (hSucc H e t)
        (dcondSet (predSet^[3] (expTag e)) (hPred H e t)
          (dcondSet (predSet^[4] (expTag e)) (hCond H e t)
            (dcondSet (predSet^[5] (expTag e)) (hApp H e t)
              (dcondSet (predSet^[6] (expTag e)) (hLam H e t)
                topElem))))))

theorem hApply_isScottContinuous_H (e t : Pomega) :
  IsScottContinuous (fun H => hApply H e t) :=
  theorem_1_3 (f := fun u => funOf u t) (g := fun H => funOf H e)
    (funOf_isScottContinuous_left t) (funOf_isScottContinuous_left e)

theorem hSucc_isScottContinuous_H (e t : Pomega) :
  IsScottContinuous (fun H => hSucc H e t) :=
  continuous_nary
    (fun y z => condSet_isScottContinuous_left y z)
    (fun x z => condSet_isScottContinuous_mid x z)
    (fun x y => condSet_isScottContinuous_right x y)
    (theorem_1_3 (funOf_isScottContinuous whichC) (hApply_isScottContinuous_H _ t))
    (theorem_1_3 (funOf_isScottContinuous inleftC)
      (theorem_1_3 succSet_isScottContinuous
        (theorem_1_3 (funOf_isScottContinuous outC)
          (hApply_isScottContinuous_H _ t))))
    (const_isScottContinuous botElem)

theorem hPred_isScottContinuous_H (e t : Pomega) :
  IsScottContinuous (fun H => hPred H e t) :=
  continuous_nary
    (fun y z => condSet_isScottContinuous_left y z)
    (fun x z => condSet_isScottContinuous_mid x z)
    (fun x y => condSet_isScottContinuous_right x y)
    (theorem_1_3 (funOf_isScottContinuous whichC) (hApply_isScottContinuous_H _ t))
    (theorem_1_3 (funOf_isScottContinuous inleftC)
      (theorem_1_3 predSet_isScottContinuous
        (theorem_1_3 (funOf_isScottContinuous outC)
          (hApply_isScottContinuous_H _ t))))
    (const_isScottContinuous botElem)

```

```

theorem hCond_isScottContinuous_H (e t : Pomega) :
  IsScottContinuous (fun H => hCond H e t) :=
theorem_1_3 (funOf_isScottContinuous lambR)
  (continuous_nary
    (fun y z => condSet_isScottContinuous_left y z)
    (fun x z => condSet_isScottContinuous_mid x z)
    (fun x y => condSet_isScottContinuous_right x y)
    (theorem_1_3 (funOf_isScottContinuous whichC)
      (hApply_isScottContinuous_H _ t))
    (continuous_nary
      (fun y z => condSet_isScottContinuous_left y z)
      (fun x z => condSet_isScottContinuous_mid x z)
      (fun x y => condSet_isScottContinuous_right x y)
      (theorem_1_3 (funOf_isScottContinuous outC)
        (hApply_isScottContinuous_H _ t))
      (hApply_isScottContinuous_H _ t)
      (hApply_isScottContinuous_H _ t))
    (hApply_isScottContinuous_H _ t))

theorem hApp_isScottContinuous_H (e t : Pomega) :
  IsScottContinuous (fun H => hApp H e t) :=
  continuous_nary
    (fun y z => condSet_isScottContinuous_left y z)
    (fun x z => condSet_isScottContinuous_mid x z)
    (fun x y => condSet_isScottContinuous_right x y)
    (theorem_1_3 (funOf_isScottContinuous whichC)
      (hApply_isScottContinuous_H _ t))
    (const_isScottContinuous botElem)
    (continuous_tuple
      (fun y => funOf_isScottContinuous_left y)
      (fun u => funOf_isScottContinuous u)
      (theorem_1_3 (funOf_isScottContinuous outC)
        (hApply_isScottContinuous_H _ t))
      (hApply_isScottContinuous_H _ t))

theorem hLam_isScottContinuous_H (e t : Pomega) :
  IsScottContinuous (fun H => hLam H e t) :=
  theorem_1_3 (funOf_isScottContinuous inrightC)
    (graph_const_isScottContinuous
      (fun H x =>
        hApply H (funOf (expPayload e) (ofNat 1))
          (updateEnvUnion t x (funOf (expPayload e) (ofNat 0))))
      (fun _ => hApply_isScottContinuous_H _ _))

theorem Hstep_isScottContinuous_H (e t : Pomega) :
  IsScottContinuous (fun H => Hstep H e t) :=
  continuous_nary
    (fun y z => dcondSet_isScottContinuous_left y z)
    (fun x z => dcondSet_isScottContinuous_mid x z)
    (fun x y => dcondSet_isScottContinuous_right x y)
    (const_isScottContinuous (expTag e)) (const_isScottContinuous (hVar e t))
    (continuous_nary
      (fun y z => dcondSet_isScottContinuous_left y z)
      (fun x z => dcondSet_isScottContinuous_mid x z)
      (fun x y => dcondSet_isScottContinuous_right x y)
      (const_isScottContinuous (predSet (expTag e)))
      (const_isScottContinuous hZero)
      (continuous_nary
        (fun y z => dcondSet_isScottContinuous_left y z)
        (fun x z => dcondSet_isScottContinuous_mid x z)
        (fun x y => dcondSet_isScottContinuous_right x y)
        (const_isScottContinuous (predSet (predSet (expTag e))))
        (hSucc_isScottContinuous_H e t))
    (hSucc_isScottContinuous_H e t)

```

```

(continuous_nary
  (fun y z => dcondSet_isScottContinuous_left y z)
  (fun x z => dcondSet_isScottContinuous_mid x z)
  (fun x y => dcondSet_isScottContinuous_right x y)
  (const_isScottContinuous (predSet^[3] (expTag e)))
  (hPred_isScottContinuous_H e t)
  (continuous_nary
    (fun y z => dcondSet_isScottContinuous_left y z)
    (fun x z => dcondSet_isScottContinuous_mid x z)
    (fun x y => dcondSet_isScottContinuous_right x y)
    (const_isScottContinuous (predSet^[4] (expTag e)))
    (hCond_isScottContinuous_H e t)
    (continuous_nary
      (fun y z => dcondSet_isScottContinuous_left y z)
      (fun x z => dcondSet_isScottContinuous_mid x z)
      (fun x y => dcondSet_isScottContinuous_right x y)
      (const_isScottContinuous (predSet^[5] (expTag e)))
      (hApp_isScottContinuous_H e t)
      (continuous_nary
        (fun y z => dcondSet_isScottContinuous_left y z)
        (fun x z => dcondSet_isScottContinuous_mid x z)
        (fun x y => dcondSet_isScottContinuous_right x y)
        (const_isScottContinuous (predSet^[6] (expTag e)))
        (hLam_isScottContinuous_H e t)
        (const_isScottContinuous topElem))))))

/-- **Scott 1976, (4.45).** Continuous operator whose least fixed point is
the syntax-directed interpreter. -/
def HF (H : Pomega) : Pomega :=
  graph (fun e => graph (fun t => Hstep H e t))

theorem hVar_isScottContinuous_t (e : Pomega) :
  IsScottContinuous (fun t => hVar e t) :=
  funOf_isScottContinuous_left (expPayload e)

theorem hSucc_isScottContinuous_t (H e : Pomega) :
  IsScottContinuous (fun t => hSucc H e t) :=
  continuous_nary
    (fun y z => condSet_isScottContinuous_left y z)
    (fun x z => condSet_isScottContinuous_mid x z)
    (fun x y => condSet_isScottContinuous_right x y)
    (theorem_1_3 (f := funOf whichC) (g := fun t => hApply H (expPayload e) t)
      (funOf_isScottContinuous whichC)
      (funOf_isScottContinuous (funOf H (expPayload e))))
    (theorem_1_3 (f := funOf inleftC)
      (g := fun t => succSet (funOf outC (hApply H (expPayload e) t)))
      (funOf_isScottContinuous inleftC)
      (theorem_1_3 (f := succSet)
        (g := fun t => funOf outC (hApply H (expPayload e) t))
        succSet_isScottContinuous
        (theorem_1_3 (f := funOf outC) (g := fun t => hApply H (expPayload e) t)
          (funOf_isScottContinuous outC)
          (funOf_isScottContinuous (funOf H (expPayload e))))))
    (const_isScottContinuous botElem)

theorem hPred_isScottContinuous_t (H e : Pomega) :
  IsScottContinuous (fun t => hPred H e t) :=
  continuous_nary
    (fun y z => condSet_isScottContinuous_left y z)
    (fun x z => condSet_isScottContinuous_mid x z)
    (fun x y => condSet_isScottContinuous_right x y)
    (theorem_1_3 (f := funOf whichC) (g := fun t => hApply H (expPayload e) t)
      (funOf_isScottContinuous whichC)

```

```

    (funOf_isScottContinuous (funOf H (expPayload e))))
  (theorem_1_3 (f := funOf inleftC)
    (g := fun t => predSet (funOf outC (hApply H (expPayload e) t)))
    (funOf_isScottContinuous inleftC)
    (theorem_1_3 (f := predSet)
      (g := fun t => funOf outC (hApply H (expPayload e) t))
      predSet_isScottContinuous
      (theorem_1_3 (f := funOf outC) (g := fun t => hApply H (expPayload e) t)
        (funOf_isScottContinuous outC)
        (funOf_isScottContinuous (funOf H (expPayload e)))))
    (const_isScottContinuous botElem))

theorem hCond_isScottContinuous_t (H e : Pomega) :
  IsScottContinuous (fun t => hCond H e t) :=
  theorem_1_3 (f := funOf lambdR)
    (g := fun t =>
      condSet (funOf whichC (hApply H (funOf (expPayload e) (ofNat 0)) t))
        (condSet (funOf outC (hApply H (funOf (expPayload e) (ofNat 0)) t))
          (hApply H (funOf (expPayload e) (ofNat 1)) t)
          (hApply H (funOf (expPayload e) (ofNat 2)) t))
        (hApply H (funOf (expPayload e) (ofNat 3)) t))
    (funOf_isScottContinuous lambdR)
  (continuous_nary
    (fun y z => condSet_isScottContinuous_left y z)
    (fun x z => condSet_isScottContinuous_mid x z)
    (fun x y => condSet_isScottContinuous_right x y)
    (theorem_1_3 (f := funOf whichC)
      (g := fun t => hApply H (funOf (expPayload e) (ofNat 0)) t)
      (funOf_isScottContinuous whichC)
      (funOf_isScottContinuous (funOf H (funOf (expPayload e) (ofNat 0)))))
    (continuous_nary
      (fun y z => condSet_isScottContinuous_left y z)
      (fun x z => condSet_isScottContinuous_mid x z)
      (fun x y => condSet_isScottContinuous_right x y)
      (theorem_1_3 (f := funOf outC)
        (g := fun t => hApply H (funOf (expPayload e) (ofNat 0)) t)
        (funOf_isScottContinuous outC)
        (funOf_isScottContinuous (funOf H (funOf (expPayload e) (ofNat 0)))))
      (funOf_isScottContinuous (funOf H (funOf (expPayload e) (ofNat 1)))))
      (funOf_isScottContinuous (funOf H (funOf (expPayload e) (ofNat 2)))))
      (funOf_isScottContinuous (funOf H (funOf (expPayload e) (ofNat 3)))))

theorem hApp_isScottContinuous_t (H e : Pomega) :
  IsScottContinuous (fun t => hApp H e t) :=
  continuous_nary
    (fun y z => condSet_isScottContinuous_left y z)
    (fun x z => condSet_isScottContinuous_mid x z)
    (fun x y => condSet_isScottContinuous_right x y)
    (theorem_1_3 (f := funOf whichC)
      (g := fun t => hApply H (funOf (expPayload e) (ofNat 0)) t)
      (funOf_isScottContinuous whichC)
      (funOf_isScottContinuous (funOf H (funOf (expPayload e) (ofNat 0)))))
    (const_isScottContinuous botElem)
  (continuous_tuple
    (fun y => funOf_isScottContinuous_left y)
    (fun u => funOf_isScottContinuous u)
    (theorem_1_3 (f := funOf outC)
      (g := fun t => hApply H (funOf (expPayload e) (ofNat 0)) t)
      (funOf_isScottContinuous outC)
      (funOf_isScottContinuous (funOf H (funOf (expPayload e) (ofNat 0)))))
    (funOf_isScottContinuous (funOf H (funOf (expPayload e) (ofNat 1)))))

theorem hLam_isScottContinuous_t (H e : Pomega) :

```

```

IsScottContinuous (fun t => hLam H e t) :=
theorem_1_3 (f := funOf inrightC)
(g := fun t =>
  graph (fun x =>
    hApply H (funOf (expPayload e) (ofNat 1))
    (updateEnvUnion t x (funOf (expPayload e) (ofNat 0)))))
(funOf_isScottContinuous inrightC)
(graph_const_isScottContinuous
  (fun t x =>
    hApply H (funOf (expPayload e) (ofNat 1))
    (updateEnvUnion t x (funOf (expPayload e) (ofNat 0)))))
(fun x =>
  theorem_1_3
    (f := funOf (funOf H (funOf (expPayload e) (ofNat 1)))))
  (g := fun t => updateEnvUnion t x (funOf (expPayload e) (ofNat 0)))
  (funOf_isScottContinuous (funOf H (funOf (expPayload e) (ofNat 1))))
  (updateEnvUnion_isScottContinuous_t x
    (funOf (expPayload e) (ofNat 0)))))

theorem Hstep_isScottContinuous_t (H e : Pomega) :
  IsScottContinuous (fun t => Hstep H e t) :=
  continuous_nary
    (fun y z => dcondSet_isScottContinuous_left y z)
    (fun x z => dcondSet_isScottContinuous_mid x z)
    (fun x y => dcondSet_isScottContinuous_right x y)

```

Lean 4 source (lines 3601–4000)

```

(const_isScottContinuous (expTag e))
(hVar_isScottContinuous_t e)
(continuous_nary
  (fun y z => dcondSet_isScottContinuous_left y z)
  (fun x z => dcondSet_isScottContinuous_mid x z)
  (fun x y => dcondSet_isScottContinuous_right x y)
  (const_isScottContinuous (predSet (expTag e)))
  (const_isScottContinuous hZero)
  (continuous_nary
    (fun y z => dcondSet_isScottContinuous_left y z)
    (fun x z => dcondSet_isScottContinuous_mid x z)
    (fun x y => dcondSet_isScottContinuous_right x y)
    (const_isScottContinuous (predSet (predSet (expTag e)))))
    (hSucc_isScottContinuous_t H e)
  (continuous_nary
    (fun y z => dcondSet_isScottContinuous_left y z)
    (fun x z => dcondSet_isScottContinuous_mid x z)
    (fun x y => dcondSet_isScottContinuous_right x y)
    (const_isScottContinuous (predSet^[3] (expTag e)))
    (hPred_isScottContinuous_t H e)
  (continuous_nary
    (fun y z => dcondSet_isScottContinuous_left y z)
    (fun x z => dcondSet_isScottContinuous_mid x z)
    (fun x y => dcondSet_isScottContinuous_right x y)
    (const_isScottContinuous (predSet^[4] (expTag e)))
    (hCond_isScottContinuous_t H e)
  (continuous_nary
    (fun y z => dcondSet_isScottContinuous_left y z)
    (fun x z => dcondSet_isScottContinuous_mid x z)
    (fun x y => dcondSet_isScottContinuous_right x y)
    (const_isScottContinuous (predSet^[5] (expTag e)))
    (hApp_isScottContinuous_t H e)
  (continuous_nary
    (fun y z => dcondSet_isScottContinuous_left y z)
    (fun x z => dcondSet_isScottContinuous_mid x z)
    (fun x y => dcondSet_isScottContinuous_right x y)

```

```

      (const_isScottContinuous (predSet^[6] (expTag e)))
      (hLam_isScottContinuous_t H e)
      (const_isScottContinuous topElem))))))

theorem hApply_isScottContinuous_e (H t : Pomega) :
  IsScottContinuous (fun e => hApply H e t) :=
  theorem_1_3 (f := fun u => funOf u t) (g := funOf H)
    (funOf_isScottContinuous_left t) (funOf_isScottContinuous H)

theorem hVar_isScottContinuous_e (t : Pomega) :
  IsScottContinuous (fun e => hVar e t) :=
  theorem_1_3 (f := funOf t) (g := expPayload)
    (funOf_isScottContinuous t) (funOf_isScottContinuous_left (ofNat 1))

theorem predSet_iterate_expTag_isScottContinuous (k : Nat) :
  IsScottContinuous (fun e => predSet^[k] (expTag e)) := by
  induction k with
  | zero => exact funOf_isScottContinuous_left (ofNat 0)
  | succ k ih =>
    have h := theorem_1_3 (f := predSet)
      (g := fun e => predSet^[k] (expTag e))
      predSet_isScottContinuous ih
    convert h using 1
    funext e
    exact Function.iterate_succ_apply' predSet k (expTag e)

theorem hApply_payload_isScottContinuous_e (H t : Pomega) (i : Nat) :
  IsScottContinuous (fun e =>
    hApply H (funOf (expPayload e) (ofNat i)) t) :=
  theorem_1_3 (f := fun e => hApply H e t)
    (g := fun e => funOf (expPayload e) (ofNat i))
    (hApply_isScottContinuous_e H t)
    (theorem_1_3 (f := fun u => funOf u (ofNat i)) (g := expPayload)
      (funOf_isScottContinuous_left (ofNat i))
      (funOf_isScottContinuous_left (ofNat 1))))

theorem hSucc_isScottContinuous_e (H t : Pomega) :
  IsScottContinuous (fun e => hSucc H e t) :=
  let hrec :=
    theorem_1_3 (f := fun e => hApply H e t) (g := expPayload)
      (hApply_isScottContinuous_e H t)
      (funOf_isScottContinuous_left (ofNat 1))
  continuous_nary
    (fun y z => condSet_isScottContinuous_left y z)
    (fun x z => condSet_isScottContinuous_mid x z)
    (fun x y => condSet_isScottContinuous_right x y)
    (theorem_1_3 (f := funOf whichC) (g := fun e => hApply H (expPayload e) t)
      (funOf_isScottContinuous whichC) hrec)
    (theorem_1_3 (f := funOf inleftC)
      (g := fun e => succSet (funOf outC (hApply H (expPayload e) t)))
      (funOf_isScottContinuous inleftC)
      (theorem_1_3 (f := succSet)
        (g := fun e => funOf outC (hApply H (expPayload e) t))
        succSet_isScottContinuous
        (theorem_1_3 (f := funOf outC) (g := fun e => hApply H (expPayload e) t)
          (funOf_isScottContinuous outC) hrec)))
    (const_isScottContinuous botElem)

theorem hPred_isScottContinuous_e (H t : Pomega) :
  IsScottContinuous (fun e => hPred H e t) :=
  let hrec :=
    theorem_1_3 (f := fun e => hApply H e t) (g := expPayload)
      (hApply_isScottContinuous_e H t)

```



```

      (funOf_isScottContinuous_left (ofNat 1))
continuous_nary
  (fun y z => condSet_isScottContinuous_left y z)
  (fun x z => condSet_isScottContinuous_mid x z)
  (fun x y => condSet_isScottContinuous_right x y)
  (theorem_1_3 (f := funOf whichC) (g := fun e => hApply H (expPayload e) t)
    (funOf_isScottContinuous whichC) hrec)
  (theorem_1_3 (f := funOf inleftC)
    (g := fun e => predSet (funOf outC (hApply H (expPayload e) t)))
    (funOf_isScottContinuous inleftC)
    (theorem_1_3 (f := predSet)
      (g := fun e => funOf outC (hApply H (expPayload e) t))
      predSet_isScottContinuous
      (theorem_1_3 (f := funOf outC) (g := fun e => hApply H (expPayload e) t)
        (funOf_isScottContinuous outC) hrec)))
  (const_isScottContinuous botElem)

theorem hCond_isScottContinuous_e (H t : Pomega) :
  IsScottContinuous (fun e => hCond H e t) :=
  theorem_1_3 (f := funOf lambR)
    (g := fun e =>
      condSet (funOf whichC (hApply H (funOf (expPayload e) (ofNat 0)) t))
        (condSet (funOf outC (hApply H (funOf (expPayload e) (ofNat 0)) t))
          (hApply H (funOf (expPayload e) (ofNat 1)) t)
          (hApply H (funOf (expPayload e) (ofNat 2)) t))
        (hApply H (funOf (expPayload e) (ofNat 3)) t))
    (funOf_isScottContinuous lambR)
  (continuous_nary
    (fun y z => condSet_isScottContinuous_left y z)
    (fun x z => condSet_isScottContinuous_mid x z)
    (fun x y => condSet_isScottContinuous_right x y)
    (theorem_1_3 (f := funOf whichC)
      (g := fun e => hApply H (funOf (expPayload e) (ofNat 0)) t)
      (funOf_isScottContinuous whichC)
      (hApply_payload_isScottContinuous_e H t 0))
    (continuous_nary
      (fun y z => condSet_isScottContinuous_left y z)
      (fun x z => condSet_isScottContinuous_mid x z)
      (fun x y => condSet_isScottContinuous_right x y)
      (theorem_1_3 (f := funOf outC)
        (g := fun e => hApply H (funOf (expPayload e) (ofNat 0)) t)
        (funOf_isScottContinuous outC)
        (hApply_payload_isScottContinuous_e H t 0))
      (hApply_payload_isScottContinuous_e H t 1)
      (hApply_payload_isScottContinuous_e H t 2)
      (hApply_payload_isScottContinuous_e H t 3))

theorem hApp_isScottContinuous_e (H t : Pomega) :
  IsScottContinuous (fun e => hApp H e t) :=
  continuous_nary
    (fun y z => condSet_isScottContinuous_left y z)
    (fun x z => condSet_isScottContinuous_mid x z)
    (fun x y => condSet_isScottContinuous_right x y)
    (theorem_1_3 (f := funOf whichC)
      (g := fun e => hApply H (funOf (expPayload e) (ofNat 0)) t)
      (funOf_isScottContinuous whichC)
      (hApply_payload_isScottContinuous_e H t 0))
    (const_isScottContinuous botElem)
  (continuous_tuple
    (fun y => funOf_isScottContinuous_left y)
    (fun u => funOf_isScottContinuous u)
    (theorem_1_3 (f := funOf outC)
      (g := fun e => hApply H (funOf (expPayload e) (ofNat 0)) t)

```

```

      (funOf_isScottContinuous outC)
      (hApply_payload_isScottContinuous_e H t 0))
      (hApply_payload_isScottContinuous_e H t 1))

theorem hLam_isScottContinuous_e (H t : Pomega) :
  IsScottContinuous (fun e => hLam H e t) :=
  theorem_1_3 (f := funOf inrightC)
    (g := fun e =>
      graph (fun x =>
        hApply H (funOf (expPayload e) (ofNat 1))
        (updateEnvUnion t x (funOf (expPayload e) (ofNat 0)))))
    (funOf_isScottContinuous inrightC)
    (graph_const_isScottContinuous
      (fun e x =>
        hApply H (funOf (expPayload e) (ofNat 1))
        (updateEnvUnion t x (funOf (expPayload e) (ofNat 0)))))
    (fun x =>
      continuous_tuple
        (fun y =>
          theorem_1_3 (f := fun u => funOf u y) (g := funOf H)
            (funOf_isScottContinuous_left y) (funOf_isScottContinuous H))
          (fun u => funOf_isScottContinuous (funOf H u))
          (theorem_1_3 (f := fun u => funOf u (ofNat 1)) (g := expPayload)
            (funOf_isScottContinuous_left (ofNat 1))
            (funOf_isScottContinuous_left (ofNat 1)))
          (theorem_1_3 (f := updateEnvUnion t x)
            (g := fun e => funOf (expPayload e) (ofNat 0))
            (updateEnvUnion_isScottContinuous_idx t x)
            (theorem_1_3 (f := fun u => funOf u (ofNat 0)) (g := expPayload)
              (funOf_isScottContinuous_left (ofNat 0))
              (funOf_isScottContinuous_left (ofNat 1)))))
        )
    )

theorem Hstep_isScottContinuous_e (H t : Pomega) :
  IsScottContinuous (fun e => Hstep H e t) :=
  continuous_nary
    (fun y z => dcondSet_isScottContinuous_left y z)
    (fun x z => dcondSet_isScottContinuous_mid x z)
    (fun x y => dcondSet_isScottContinuous_right x y)
    (funOf_isScottContinuous_left (ofNat 0))
    (hVar_isScottContinuous_e t)
    (continuous_nary
      (fun y z => dcondSet_isScottContinuous_left y z)
      (fun x z => dcondSet_isScottContinuous_mid x z)
      (fun x y => dcondSet_isScottContinuous_right x y)
      (predSet_iterate_expTag_isScottContinuous 1)
      (const_isScottContinuous hZero)
      (continuous_nary
        (fun y z => dcondSet_isScottContinuous_left y z)
        (fun x z => dcondSet_isScottContinuous_mid x z)
        (fun x y => dcondSet_isScottContinuous_right x y)
        (predSet_iterate_expTag_isScottContinuous 2)
        (hSucc_isScottContinuous_e H t)
        (continuous_nary
          (fun y z => dcondSet_isScottContinuous_left y z)
          (fun x z => dcondSet_isScottContinuous_mid x z)
          (fun x y => dcondSet_isScottContinuous_right x y)
          (predSet_iterate_expTag_isScottContinuous 3)
          (hPred_isScottContinuous_e H t)
          (continuous_nary
            (fun y z => dcondSet_isScottContinuous_left y z)
            (fun x z => dcondSet_isScottContinuous_mid x z)
            (fun x y => dcondSet_isScottContinuous_right x y)
            (predSet_iterate_expTag_isScottContinuous 4)
          )
        )
      )
    )

```

```

(hCond_isScottContinuous_e H t)
(continuous_nary
  (fun y z => dcondSet_isScottContinuous_left y z)
  (fun x z => dcondSet_isScottContinuous_mid x z)
  (fun x y => dcondSet_isScottContinuous_right x y)
  (predSet_iterate_expTag_isScottContinuous 5)
  (hApp_isScottContinuous_e H t)
  (continuous_nary
    (fun y z => dcondSet_isScottContinuous_left y z)
    (fun x z => dcondSet_isScottContinuous_mid x z)
    (fun x y => dcondSet_isScottContinuous_right x y)
    (predSet_iterate_expTag_isScottContinuous 6)
    (hLam_isScottContinuous_e H t)
    (const_isScottContinuous topElem))))))

theorem HF_inner_isScottContinuous (H : Pomega) :
  IsScottContinuous (fun e => graph (fun t => Hstep H e t)) :=
  graph_const_isScottContinuous (fun e t => Hstep H e t)
  (fun t => Hstep_isScottContinuous_e H t)

theorem HF_isScottContinuous : IsScottContinuous HF :=
  graph_const_isScottContinuous
  (fun H e => graph (fun t => Hstep H e t))
  (fun e => graph_const_isScottContinuous (fun H t => Hstep H e t)
    (fun t => Hstep_isScottContinuous_H e t))

theorem HF_app (H e : Pomega) :
  funOf (HF H) e = graph (fun t => Hstep H e t) :=
  beta (HF_inner_isScottContinuous H) e

theorem HF_app2 (H e t : Pomega) :
  funOf (funOf (HF H) e) t = Hstep H e t := by
  rw [HF_app]
  exact beta (Hstep_isScottContinuous_t H e) t

/-- Raw least fixed point of the (4.43) operator. -/
def Hfun : Pomega := fix HF

theorem Hfun_fixed : HF Hfun = Hfun :=
  (theorem_1_4 HF_isScottContinuous).1

theorem Hfun_app2 (e t : Pomega) :
  funOf (funOf Hfun e) t = Hstep Hfun e t := by
  have h := congrArg (fun H => funOf (funOf H e) t) Hfun_fixed
  simpa [HF_app2] using h.symm

theorem Hstep_tag0 (H x t : Pomega) :
  Hstep H (tagInj 0 x) t = funOf t x := by
  simp only [Hstep, expTag, expPayload, hVar, tagInj_zero, tagInj_one,
    dcondSet_ofNat_zero]

theorem Hstep_tag1 (H x t : Pomega) :
  Hstep H (tagInj 1 x) t = hZero := by
  simp only [Hstep, expTag, tagInj_zero, predSet_ofNat_succ,
    dcondSet_ofNat_one, dcondSet_ofNat_zero]

theorem Hstep_tag2 (H x t : Pomega) :
  Hstep H (tagInj 2 x) t = hSucc H (tagInj 2 x) t := by
  simp only [Hstep, expTag, tagInj_zero, predSet_ofNat_succ,
    dcondSet_ofNat_succ, dcondSet_ofNat_zero]

theorem Hstep_tag3 (H x t : Pomega) :
  Hstep H (tagInj 3 x) t = hPred H (tagInj 3 x) t := by

```

```

simp only [Hstep, expTag, tagInj_zero, dcondSet_ofNat_succ,
  predSet_ofNat_succ, predSet_iterate_self,
  dcondSet_ofNat_zero]

theorem Hstep_tag4 (H x t : Pomega) :
  Hstep H (tagInj 4 x) t = hCond H (tagInj 4 x) t := by
  simp only [Hstep, expTag, tagInj_zero, dcondSet_ofNat_succ,
    predSet_ofNat_succ, predSet_iterate_ofNat (k := 3) (i := 1),
    predSet_iterate_self, dcondSet_ofNat_zero]

theorem Hstep_tag5 (H x t : Pomega) :
  Hstep H (tagInj 5 x) t = hApp H (tagInj 5 x) t := by
  simp only [Hstep, expTag, tagInj_zero, dcondSet_ofNat_succ,
    predSet_ofNat_succ, predSet_iterate_ofNat (k := 3) (i := 2),
    predSet_iterate_ofNat (k := 4) (i := 1),
    predSet_iterate_self, dcondSet_ofNat_zero]

theorem Hstep_tag6 (H x t : Pomega) :
  Hstep H (tagInj 6 x) t = hLam H (tagInj 6 x) t := by
  simp only [Hstep, expTag, tagInj_zero, dcondSet_ofNat_succ,
    predSet_ofNat_succ, predSet_iterate_ofNat (k := 3) (i := 3),
    predSet_iterate_ofNat (k := 4) (i := 2),
    predSet_iterate_ofNat (k := 5) (i := 1),
    predSet_iterate_self, dcondSet_ofNat_zero]

theorem Hfun_interp : forall tau : LambTerm, forall t : Pomega,
  funOf (funOf Hfun (encodeExp tau)) t = Hinterp tau t := by
  intro tau
  induction tau with
  | var n =>
    intro t
    rw [Hfun_app2, encodeExp, Hstep_tag0]
    rfl
  | zero =>
    intro t
    rw [Hfun_app2, encodeExp, Hstep_tag1]
    rfl
  | succ tau ih =>
    intro t
    rw [Hfun_app2, encodeExp, Hstep_tag2]
    simp only [hSucc, hApply, expPayload, tagInj_one]
    rw [ih]
    rfl
  | pred tau ih =>
    intro t
    rw [Hfun_app2, encodeExp, Hstep_tag3]
    simp only [hPred, hApply, expPayload, tagInj_one]
    rw [ih]
    rfl
  | condq ? tau sigma ? ih? ihtau ihsigma ih? =>
    intro t
    rw [Hfun_app2, encodeExp, Hstep_tag4]
    simp only [hCond, hApply, expPayload, tagInj_one, seq4_app_zero,
      seq4_app_one, seq4_app_two, seq4_app_three]
    rw [ih?, ihtau, ihsigma, ih?]
    rfl
  | app tau sigma ihtau ihsigma =>
    intro t
    rw [Hfun_app2, encodeExp, Hstep_tag5]
    simp only [hApp, hApply, expPayload, tagInj_one, pairSeq_app_zero,
      pairSeq_app_one]
    rw [ihtau, ihsigma]
    rfl

```

```

| lam n tau ih =>
  intro t
  rw [Hfun_app2, encodeExp, Hstep_tag6]
  simp only [hLam, hApply, expPayload, tagInj_one, pairSeq_app_zero,
    pairSeq_app_one, updateEnvUnion_ofNat]
  congr 1
  apply congrArg graph
  funext x
  exact ih _

theorem Hfun_decode (tau : LambTerm) :
  funOf Hfun (encodeExp tau) = graph (Hinterp tau) := by
  have hb : funOf Hfun (encodeExp tau) = graph (fun t => Hstep Hfun (encodeExp tau) t) := by
    have := congrArg (fun H => funOf H (encodeExp tau)) Hfun_fixed
    simpa [HF_app] using this.symm
  refine hb.trans ?_
  apply congrArg graph
  funext t
  simpa [Hfun_app2] using Hfun_interp tau t

/-- **Scott 1976, (4.45).** `? : exp -> (env -> lamb)`, the retract of the
least fixed point of the syntax-directed continuous operator. -/
def Hcomb : Pomega :=
  funOf (arrowR expR (arrowR envR lambR)) Hfun

theorem Hcomb_typed :
  typed Hcomb (arrowR expR (arrowR envR lambR)) :=
  typed_apply_retract
  (arrowR_isRetract expR_isRetract
    (arrowR_isRetract envR_isRetract lambR_isRetract))

theorem Hcomb_app (e : Pomega) :
  funOf Hcomb e =
    funOf (arrowR envR lambR) (funOf Hfun (funOf expR e)) := by
  rw [Hcomb, arrowR_app]
  simp only [comp_app]

/-- **Scott 1976, (4.45).** Encoded terms live in `exp`, `??tau?` is typed
`env -> lamb`, and the continuous `?` decodes `encodeExp tau` to `??tau?`. -/
theorem eq_4_45 (tau : LambTerm) :
  typed (encodeExp tau) expR /\
  typed (Htyped tau) (arrowR envR lambR) /\
  funOf Hcomb (encodeExp tau) = Htyped tau := by
  refine <encodeExp_typed tau, Htyped_typed tau, ?_>
  rw [Hcomb_app, <- encodeExp_typed tau, Hfun_decode]
  rfl

theorem Hcomb_decode (tau : LambTerm) :
  funOf Hcomb (encodeExp tau) = Htyped tau :=

Lean 4 source (lines 4001–4001)

(eq_4_45 tau).2.2

```

A.15 Scott1976/DataTypesAsLattices/Basic.lean

19 lines.

Lean 4 source

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.

```

```

Authors: Lars Warren Ericson.
-/
import Scott1976.DataTypesAsLattices.Enumeration
import Scott1976.DataTypesAsLattices.Classification
import Scott1976.DataTypesAsLattices.Closures

/-!
# Scott 1976 -- Data Types as Lattices

Primary source: Dana S. Scott, *Data Types as Lattices*, Technical Monograph
PRG-5 (September 1976); reprinted SIAM J. Comput. 5 (1976), 522-587.
Working transcription: `sources/Data_Types_as_Lattices_vision.md`.

The Palomar comparator names every numbered theorem from SS1-7
and locks the paper's core definitions.
-/

```