

Formalization of Scott’s Stochastic λ -Calculi in Agda

Lars Warren Ericson

Independent researcher, d/b/a Catskills Research Company

`lars.ericson@catskillsresearch.com`

Dana S. Scott

Computer Science Department, Carnegie Mellon University, Emeritus

September 2026

CMU-CS-26-XXX

School of Computer Science
Carnegie Mellon University
Pittsburgh, PA 15213

This report will be cross-archived on arXiv in `cs.LO` and `math.LO`.

Source repository: <https://github.com/catskillsresearch/scott2013>

Abstract

Scott’s PROGIC 2013 extended abstract *Stochastic λ -Calculi* expands the graph model of untyped λ -calculus so that enumeration operators on $\mathcal{P}(\mathbb{N})$ interpret both ordinary combinators and random algorithms. Application is continuous, every continuous map has a largest graph, and λ -abstraction preserves continuity and computability. The same space is injective and contains a homeomorphic copy of every countably based T_0 -space. Random variables valued in $\mathcal{P}(\mathbb{N})$ are closed under application, so λ -terms become stochastic programs; regular and probabilistic languages appear as special cases. This report records an Agda formalization of that development, beginning with Scott’s pairing function. The library is checked with `agda --safe` and introduces no postulates. Large-language-model assistance is used in drafting; every accepted declaration is typechecked. Source and build scripts accompany the report.

Copyright © 2026 Lars Warren Ericson and Dana S. Scott

Keywords: Agda; formal verification; lambda calculus; graph model; enumeration operators; stochastic lambda calculus

1 Introduction and Historical Context

1.1 Historical context

The graph model identifies continuous operators on $\mathcal{P}(\mathbb{N})$ with sets of integers via enumeration operators of Myhill–Shepherdson and Friedberg–Rogers. Scott defined the model in the mid-1970s; Plotkin had given a closely related set-theoretic construction earlier. The 2013 abstract recycles that model as a programming language for recursive function theory and then adds random combinators.

This formalization is a standalone Agda development of the 2013/2014 abstract. It does not import the sibling formalizations of Scott 1972, 1976, or 2026, though those papers supply historical and later context. This formalization was undertaken after Dana S. Scott suggested the paper as a target for mechanization.

1.2 Retrospective Remarks by Dana S. Scott

Editorial placeholder. Prof. Scott’s approved retrospective remarks will be inserted here before publication. No language is attributed to him in this draft.

2 Mathematical Background

2.1 Pairing, sequences, and Kleene star

Scott numbers pairs by $(n, m) = 2^n(2m + 1)$. Sequences use $\langle \rangle = 0$ and a recursive cons $\langle n_0, \dots, n_k \rangle = (\langle n_0, \dots, n_{k-1} \rangle, n_k)$. Finite sets use $\text{set}(0) = \emptyset$ and $\text{set}((n, m)) = \text{set}(n) \cup \{m\}$. Kleene star is $X^* = \{n \mid \text{set}(n) \subseteq X\}$.

The current library encodes pairing and proves that pairs are nonzero, so that 0 remains available for the empty sequence:

Agda source

```
pair : Nat -> Nat -> Nat
pair n m = 2 ^ n * suc (m + m)

pair-ne-zero : (n m : Nat) -> pair n m != 0
```

2.2 Enumeration operators and the graph model

Definition 2.1 sets $F(X) = \{m \mid \exists n \in X^*. (n, m) \in F\}$. Theorem 3.1 asserts continuity of application in both arguments. Theorem 3.2 supplies a largest graph for every continuous $\Phi : \mathcal{P}(\mathbb{N}) \rightarrow \mathcal{P}(\mathbb{N})$. Definition 3.3 and Theorems 3.4–3.8 give λ -abstraction, lattice identities, and the least-fixed-point combinator $\nabla = \lambda X. \Phi(X(X))$.

2.3 Random variables

A random variable is a map $X : [0, 1] \rightarrow \mathcal{P}(\mathbb{N})$ whose coordinate events are Lebesgue measurable (Definition 4.1). Theorem 4.2 closes this class under pointwise application. Theorems 4.4 and 4.5 recover regular and probabilistic languages from a sequentializer combinator.

3 Agda Architecture and Design Decisions

3.1 Scope and module layout

The bootstrap library is small:

Module	Role
<code>Scott2013.GraphModel.Basic</code>	Pairing function and <code>pair-ne-zero</code>

Later modules will add Kleene star, application, abstraction, injectivity, and random variables.

3.2 Builtin naturals

The pairing module is self-contained: it uses `Agda.Builtin.Nat` and `Agda.Builtin.Equality` only. Scott's pairing is not a Cantor pairing; the formalization uses the paper's exact formula $2^n(2m+1)$, written `2 ^ n * suc (m + m)`.

3.3 Proof dependency structure

Solid arrows are planned dependencies. Only the pairing node is implemented.

3.4 Verified theorem inventory

Paper result	Agda name	Status
§2 pairing	<code>pair / pair-ne-zero</code>	Proved
Theorem 3.1	<i>(pending)</i>	Application is continuous
Theorem 3.2	<i>(pending)</i>	Largest graph of a continuous map
Definition 3.3 / Theorems 3.4–3.8	<i>(pending)</i>	Abstraction, lattice laws, least fixed point
Theorems 3.10–3.12	<i>(pending)</i>	T_0 embedding and injectivity of $\mathcal{P}(\mathbb{N})$
Theorems 4.2, 4.4, 4.5	<i>(pending)</i>	Random application and languages

4 Verification and Automated Pipeline

4.1 Typechecking and reproducible build

The development is checked with `Agda --safe` (locally Agda 2.6.3).

```
bash scripts/build_agda.sh
bash scripts/generate_arxiv_with_code.sh
```

Regenerate the PDF and arXiv zip with `bash scripts/build_arxiv_pdf.sh`.

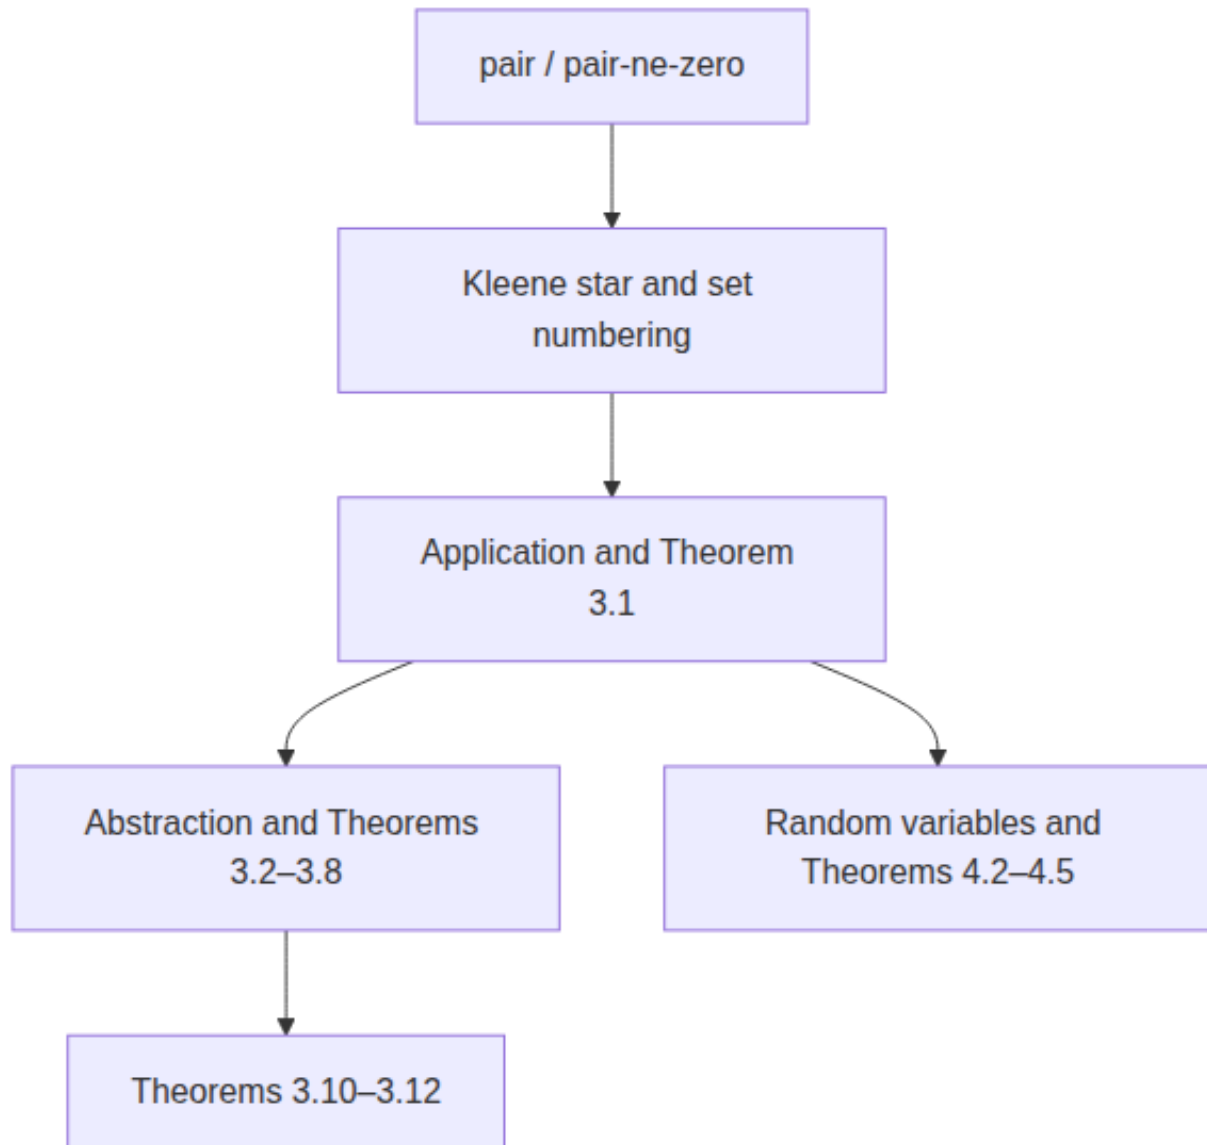


Figure 1: Intended library layers: encodings, graph-model λ -calculus, then random variables.

4.2 LLM-assisted drafting and interactive proof verification

Large language models assist with transcription, scaffolding, and this report. Outputs are provisional until Agda accepts them. No large language model is listed as an author.

5 Discussion and Future Work

Immediate work is to lock the numbered theorems rather than only the pairing encoding. The 1976 graph-model paper and the 2026 domain-valued random-variable development are related but remain separate repositories.

6 Code Availability and Archival

The complete Agda development, report source, and build scripts are at the public GitHub repository named `scott2013` under `catskillsresearch`. This version is being prepared as Carnegie Mellon University School of Computer Science Technical Report **CMU-CS-26-XXX** and will be cross-archived on arXiv under **cs.LO** and **math.LO**.

6.1 License and source PDF

Original Agda code and author-written documentation are Apache-2.0. The source paper PDF and its transcription are not Apache-2.0; see the repository NOTICE and source-material README for the copyright carve-out.

7 Acknowledgments

7.1 AI-assisted development

Agda in this repository was drafted with AI-agent assistance under Lars Warren Ericson’s direction and review. The human authors retain responsibility for the mathematical content, the formalization route, and every formal claim. **No large language model is listed as a co-author.**

We gratefully acknowledge assistance from the following tools:

- **Cursor [Cur26]** — agent-assisted editing in the Cursor IDE: formalizing Scott’s 2013 *Stochastic λ -Calculi* extended abstract in Agda, `agda --safe repair`, vision-OCR transcription, drafting this narrative (`arxiv.md`), and tracking the formalized inventory. Generated Agda was provisional until it typechecked under `--safe`.
- **Cursor Composer 2.5 Fast [Cmp25]** — routine multi-step work: module scaffolding, dependency-ordered wiring of `Scott2013/GraphModel/`, documentation, and medium proof obligations where the strategy was already fixed.
- **Anthropic Claude Sonnet 5 (medium reasoning) [Son26]** — day-to-day formalization and proof-engineering in Cursor at the medium reasoning tier: inventory and narrative maintenance, module wiring, and medium-complexity Agda obligations where the proof strategy was already fixed.

- **Anthropic Claude Opus 4.8 (high reasoning)** [Ant26] — selective use for the heaviest proof work. Every emitted proof term was checked by Agda.

List of Figures

1	Intended library layers: encodings, graph-model λ -calculus, then random variables.	3
---	---	---

8 References

- [Sco14] D. S. Scott. *Stochastic λ -calculi: An extended abstract*. Journal of Applied Logic **12** (2014), 369–376.
- [Sco76] D. S. Scott. *Data types as lattices*. SIAM Journal on Computing **5** (1976), 522–587.
- [Plo93] G. D. Plotkin. *Set-theoretical and other elementary models of the λ -calculus*. Theoretical Computer Science **121** (1993), 351–409.
- [Cur26] Anysphere, Inc. *Cursor: AI-native code editor and agent environment*. <https://cursor.com> (accessed 2026).
- [Cmp25] Anysphere, Inc. *Composer 2.5*. Model announcement and documentation, <https://cursor.com/blog/composer-2-5>; model card as integrated in Cursor, <https://cursor.com/docs/models> (accessed 2026).
- [Son26] Anthropic. *Claude Sonnet 5* (medium reasoning variant). System card, <https://www.anthropic.com/claude-sonnet-5-system-card>; model documentation as integrated in Cursor, <https://cursor.com/docs/models> (accessed 2026).
- [Ant26] Anthropic. *Claude Opus 4.8* (high thinking/reasoning variant). System card and announcement, <https://www.anthropic.com/news/claude-opus-4-8>; model documentation as integrated in Cursor, <https://cursor.com/docs/models/claude-opus-4-8> (accessed 2026).

A Agda module index

Checked by `bash scripts/build_agda.sh`. Complete sources: <https://github.com/cat-skillsresearch/scott2013>. Each subsection links to the corresponding file on GitHub.

Role	File
Root import graph	src/Scott2013.agda
Scott pairing and graph-model encodings	src/Scott2013/GraphModel/Basic.agda

Primary source (PDF): [sources/ScottPROGIC2013.pdf](#) — Dana S. Scott, *Stochastic λ -calculi: An extended abstract* (J. Applied Logic 12, 2014; PROGIC 2013).

Total: 2 modules, 64 lines of Agda.