

Formalization of Scott’s Stochastic λ -Calculi in Agda

Lars Warren Ericson

Independent researcher, d/b/a Catskills Research Company

`lars.ericson@catskillsresearch.com`

Dana S. Scott

Computer Science Department, Carnegie Mellon University, Emeritus

September 2026

CMU-CS-26-XXX

School of Computer Science
Carnegie Mellon University
Pittsburgh, PA 15213

This report will be cross-archived on arXiv in `cs.LO` and `math.LO`.

Source repository: <https://github.com/catskillsresearch/scott2013>

Abstract

Scott’s PROGIC 2013 extended abstract *Stochastic λ -Calculi* expands the graph model of untyped λ -calculus so that enumeration operators on $\mathcal{P}(\mathbb{N})$ interpret both ordinary combinators and random algorithms. Application is continuous, every continuous map has a largest graph, and λ -abstraction preserves continuity and computability. The same space is injective and contains a homeomorphic copy of every countably based T_0 -space. Random variables valued in $\mathcal{P}(\mathbb{N})$ are closed under application, so λ -terms become stochastic programs; regular and probabilistic languages appear as special cases. This report records an Agda formalization of that development, beginning with Scott’s pairing function. The library is checked with `agda --safe` and introduces no postulates. Large-language-model assistance is used in drafting; every accepted declaration is typechecked. Source and build scripts accompany the report.

Copyright © 2026 Lars Warren Ericson and Dana S. Scott

Keywords: Agda; formal verification; lambda calculus; graph model; enumeration operators; stochastic lambda calculus

1 Introduction and Historical Context

1.1 Historical context

The graph model identifies continuous operators on $\mathcal{P}(\mathbb{N})$ with sets of integers via enumeration operators of Myhill–Shepherdson and Friedberg–Rogers. Scott defined the model in the mid-1970s; Plotkin had given a closely related set-theoretic construction earlier. The 2013 abstract recycles that model as a programming language for recursive function theory and then adds random combinators.

This formalization is a standalone Agda development of the 2013/2014 abstract. It does not import the sibling formalizations of Scott 1972, 1976, or 2026, though those papers supply historical and later context. This formalization was undertaken after Dana S. Scott suggested the paper as a target for mechanization.

1.2 Retrospective Remarks by Dana S. Scott

Editorial placeholder. Prof. Scott’s approved retrospective remarks will be inserted here before publication. No language is attributed to him in this draft.

2 Tour of the Formalization

This section follows the paper’s order. Definition excerpts show the complete computational gist; theorem excerpts show the checked statement and the proof’s principal construction rather than reproducing long transport calculations. Names such as Σ , $\times$, and $\leftrightarrow$ are supplied by the local K-free prelude.

2.1 Pairing, sequence numbers, finite sets, and star

Scott’s exact pairing is used. Zero remains the empty sequence; `members` decodes cons-codes, while `setp` `n` and `star` are literally finite-list membership and $\text{set}(n) \subseteq X$.

Agda source

```
pair : Nat -> Nat -> Nat
pair n m = 2 ^ n * suc (m + m)

members : Nat -> List Nat
members-zero : members zero == []
members-pair : forall n m -> members (pair n m) == m ? members n
unpair-pair : forall n m -> unpair (pair n m) == (n , m)

?Nat : Set_1
?Nat = Nat -> Set
set_p : Nat -> ?Nat
set_p n m = m in -list members n
_ in * _ : Nat -> ?Nat -> Set
n in * X = All X (members n)
```

2.2 Definitions 2.1 and 2.2: application and continuity

Definition 2.1 carries the finite input witness, its star proof, and the graph entry. Definition 2.2 says output membership is equivalent to membership computed from finite approximants of every input.

Agda source

```
__*_ : ?Nat -> ?Nat -> ?Nat
(F * X) m = Sigma Nat (fun n -> (n in * X) x F (pair n m))

Continuous_1 : (?Nat -> ?Nat) -> Set_1
Continuous_1 ? = forall X m ->
  ? X m <-> Sigma Nat (fun k -> (k in * X) x ? (set_p k) m)
Continuous_2 : (?Nat -> ?Nat -> ?Nat) -> Set_1
Continuous_2 ? = forall F X m ->
  ? F X m <-> Sigma Nat (fun kF -> Sigma Nat (fun kX ->
    (kF in * F) x (kX in * X) x ? (set_p kF) (set_p kX) m))
```

2.3 Theorem 3.1: application is continuous

The application witness supplies the finite part of X ; its single graph entry supplies the finite part of F . Re-expanding both star witnesses proves the converse.

Agda source

```
thm-3-1-fwd : forall F X m -> (F * X) m ->
  Sigma Nat (fun kF -> Sigma Nat (fun kX ->
    (kF in * F) x (kX in * X) x (set_p kF * set_p kX) m))
thm-3-1-bwd : forall F X m ->
  Sigma Nat (fun kF -> Sigma Nat (fun kX ->
    (kF in * F) x (kX in * X) x (set_p kF * set_p kX) m)) ->
  (F * X) m
thm-3-1 : Continuous_2 __*_
thm-3-1 F X m = thm-3-1-fwd F X m , thm-3-1-bwd F X m
```

2.4 Theorem 3.2 and Definition 3.3: the largest graph

$\text{lam } \Phi$ is Scott's $\{0\} \cup \{(n, m) \mid m \in \Phi(\text{set}(n))\}$. Application recovers any continuous Φ ; decoding each nonzero entry of a competing graph proves maximality.

Agda source

```
lam : (?Nat -> ?Nat) -> ?Nat
lam ? k = (k == zero) ?
  Sigma Nat (fun n -> Sigma Nat (fun m ->
    (k == pair n m) x ? (set_p n) m))

lam-app-fwd : forall ? -> Continuous_1 ? ->
  forall X m -> (lam ? * X) m -> ? X m
lam-app-bwd : forall ? -> Continuous_1 ? ->
  forall X m -> ? X m -> (lam ? * X) m
lam-largest : forall ? G ->
  (forall X m -> (G * X) m <-> ? X m) -> G subteq lam ?
```

2.5 Theorems 3.4–3.6: iterated abstraction and lattice laws

Theorem 3.4 is the binary instance used for iterated abstraction. `lam2` realizes Corollary 3.5; its two equivalences expose one application at a time.

Agda source

```
thm-3-4 : forall ? -> Continuous_2 ? ->
  Continuous_1 (fun Y -> lam (fun X -> ? Y X))

lam_2 : (?Nat -> ?Nat -> ?Nat) -> ?Nat
lam_2 ? = lam (fun Y -> lam (fun X -> ? Y X))

thm-3-5-outer : forall ? -> Continuous_2 ? ->
  forall Y k -> (lam_2 ? * Y) k <-> lam (fun X -> ? Y X) k
thm-3-5-inner : forall ? -> Continuous_2 ? ->
  forall Y X m -> (lam (fun X' -> ? Y X') * X) m <-> ? Y X m
```

Theorem 3.6 is split into both directions of the order equivalence and both inclusions of the two equalities, avoiding function extensionality.

Agda source

```
thm-3-6- subseteq -fwd : forall F G ->
  lam (fun X -> F * X) subseteq lam (fun X -> G * X) ->
  forall X -> (F * X) subseteq (G * X)
thm-3-6- subseteq -bwd : forall F G ->
  (forall X -> (F * X) subseteq (G * X)) ->
  lam (fun X -> F * X) subseteq lam (fun X -> G * X)
thm-3-6- I : forall F G ->
  lam (fun X -> (F * X) I _p (G * X)) subseteq
  lam (fun X -> F * X) I _p lam (fun X -> G * X)
thm-3-6- I -rev : forall F G ->
  lam (fun X -> F * X) I _p lam (fun X -> G * X) subseteq
  lam (fun X -> (F * X) I _p (G * X))
thm-3-6- U : forall F G ->
  lam (fun X -> (F * X) U _p (G * X)) subseteq
  lam (fun X -> F * X) U _p lam (fun X -> G * X)
thm-3-6- U -rev : forall F G ->
  lam (fun X -> F * X) U _p lam (fun X -> G * X) subseteq
  lam (fun X -> (F * X) U _p (G * X))
```

2.6 Definition 3.7: recursive enumerability and computability

An r.e. proposition has a total fuel-indexed Boolean search: success is sound, and every proof succeeds at some fuel. Pointwise use gives an r.e. set; this is effective data, not “explicit definability.”

Agda source

```
record Semi (P : Set) : Set where
  constructor semi
  field
    search    : Nat -> Bool
    sound     : forall {fuel} -> search fuel == true -> P
```

```

complete : P -> Sigma Nat (fun fuel -> search fuel == true)

RESet : ?Nat -> Set
RESet X = forall n -> Semi (X n)

```

Closure under Boolean operations, existential projection, finite conjunction, application, and abstraction supports Definition 3.7:

Agda source

```

re-apply : forall {F X} -> RSet F -> RSet X -> RSet (F * X)
re-lam : forall {? : ?Nat -> ?Nat} ->
  (forall n -> RSet (? (set_p n))) -> RSet (lam ?)

record Computable_1 (? : ?Nat -> ?Nat) : Set_1 where
  field
    continuous_1 : Continuous_1 ?
    graph-re_1 : RSet (lam ?)

record Computable_2 (? : ?Nat -> ?Nat -> ?Nat) : Set_1 where
  field
    continuous_2 : Continuous_2 ?
    graph-re_2 : RSet (lam_2 ?)

```

2.7 Theorem 3.8: a computable least fixed point

The paper's ∇ and $P = \nabla(\nabla)$ are literal. Fixedness is pointwise in both directions; leastness uses induction on sequence codes.

Agda source

```

? : (?Nat -> ?Nat) -> ?Nat
? ? = lam (fun X -> ? (X * X))

lfp : (?Nat -> ?Nat) -> ?Nat
lfp ? = ? ? * ? ?

thm-3-8-fixed : forall ? -> Continuous_1 ? ->
  forall m -> lfp ? m <-> ? (lfp ?) m
thm-3-8-least : forall ? Q -> Continuous_1 ? ->
  (forall m -> ? Q m -> Q m) -> (forall m -> Q m -> ? Q m) ->
  forall m -> lfp ? m -> Q m

```

∇ -re builds the abstraction witness; r.e. application closes its self-application.

Agda source

```

?-re : forall ? -> Continuous_1 ? ->
  RSet (lam ?) -> RSet (? ?)

thm-3-8-computable : forall ? ->
  Computable_1 ? -> RSet (lfp ?)

```

2.8 Combinators and Definition 3.9

The ordinary combinators are graph abstractions of their semantic operators. Their correctness lemmas state actual graph application, including the three applications of S.

Agda source

```
I = lam (fun X -> X)
K = lam (fun Y -> lam (fun _ -> Y))
S = lam (fun Z -> lam (fun Y -> lam (fun X ->
    (Z * X) * (Y * X))))

I-correct-fwd : forall X m -> (I * X) m -> X m
K-correct-fwd : forall Y X m -> ((K * Y) * X) m -> Y m
S-correct-fwd : forall Z Y X m ->
    ((S * Z) * Y) * X) m -> ((Z * X) * (Y * X)) m
```

Succ, Pred, and ternary Test first receive transparent semantic operators and are then abstracted. Arithmetic proves both application directions; the three public equivalences are the materialization of the paper's arithmetic clauses.

Agda source

```
Succ-op X m = Sigma Nat (fun n -> X n x (m == suc n))
Pred-op X m = X (suc m)
Test-op Z X Y n =
    (X n x Z zero) ? (Y n x Sigma Nat (fun k -> Z (suc k)))

Succ = lam Succ-op
Pred = lam Pred-op
Test = lam (fun Z -> lam (fun X -> lam (fun Y -> Test-op Z X Y)))

Succ-correct : forall X m -> (Succ * X) m <-> Succ-op X m
Pred-correct : forall X m -> (Pred * X) m <-> Pred-op X m
Test-correct : forall Z X Y m ->
    (((Test * Z) * X) * Y) m <-> Test-op Z X Y m
```

The universal interpreter assigns codes 0–4 to K, S, Test, Succ, and Pred, and interprets 4 + pair n k by application. RE is the least fixed point of the graph of this interpreter.

Agda source

```
re-interp R zero = K
re-interp R (suc zero) = S
re-interp R (suc (suc zero)) = Test
re-interp R (suc (suc (suc zero))) = Succ
re-interp R (suc (suc (suc (suc zero)))) = Pred
re-interp R (suc (suc (suc (suc (suc k))))) =
    (R * singleton (proj_1 (unpair (suc k)))) *
    (R * singleton (proj_2 (unpair (suc k))))

RE-op R = lam (re-apply R)
RE = lfp RE-op
```

The semantic interpreter is connected back to graph application by `RE-application` and `RE-code`. Equations (i)–(vi) are therefore pointwise graph equalities, not evaluator-only statements. Finally the fixed-point operator transfers the r.e. witness for `RE-op` to `RE`.

Agda source

```
RE-i   : forall m -> (RE * singleton zero) m <-> K m
RE-ii  : forall m -> (RE * singleton (suc zero)) m <-> S m
RE-iii : forall m -> (RE * singleton (suc (suc zero))) m <-> Test m
RE-iv  : forall m -> (RE * singleton (suc (suc (suc zero)))) m <-> Succ m
RE-v   : forall m -> (RE * singleton (suc (suc (suc (suc zero))))) m <-> Pred m
RE-vi  : forall n k m ->
  (RE * singleton (suc (suc (suc (pair n k))))) m <->
  ((RE * singleton n) * (RE * singleton k)) m
RE-op-computable : Computable_1 RE-op
RE-re : RESet RE
```

2.9 Theorems 3.10–3.12: universality and injectivity

A countably based T_0 space is presented by points, basis membership, and the T_0 separation principle. The map $\varepsilon(x) = \{n \mid x \in U_n\}$ is simply basis membership viewed as a subset of naturals.

Agda source

```
record CountablyBasedT0 : Set_1 where
  field
    Point : Set
    basis : Nat -> Point -> Set
    t0    : forall x y ->
      (forall n -> basis n x <-> basis n y) -> x == y

? : (T : CountablyBasedT0) -> Point T -> ?Nat
? T x n = basis T n x
```

Theorem 3.10 is split into injectivity, continuity on the Scott subbasis, and openness onto the image. The last two reduce exactly to the definition of ε .

Agda source

```
thm-3-10-inj : forall T (x y : Point T) ->
  (forall n -> ? T x n <-> ? T y n) -> x == y
thm-3-10-inj T x y eq = t0 T x y eq

thm-3-10-cont : forall T x m ->
  Q-sing m (? T x) <-> basis T m x
thm-3-10-open : forall T m x ->
  basis T m x <-> Q-sing m (? T x)
```

Definition 3.11 is realized by the parameterized `Injectivity` module. For each coordinate of a continuous map on a subspace, its open extension U_n is supplied; Ψ collects those opens. Theorem 3.12 says that this map is continuous coordinatewise and agrees with the original map on the subspace.

Agda source

```

module Injectivity
  (UPoint : Set) (T : UPoint -> Set)
  (? : (x : UPoint) -> T x -> ?Nat)
  (U_n : Nat -> UPoint -> Set)
  (T_n=U_n : forall n x (tx : T x) -> ? x tx n <-> U_n n x) where

  ? : UPoint -> ?Nat
  ? Y n = U_n n Y
  thm-3-12-cont : forall Y n -> Q-sing n (? Y) <-> U_n n Y
  thm-3-12-extends : forall x (tx : T x) n -> ? x n <-> ? x tx n

```

2.10 Definition 4.1: literal random variables

The generic measure layer represents events as predicates and packages closure under Boolean and countable operations. Probability values and measures are abstract so that no particular real-number implementation is smuggled into the graph-model result.

Agda source

```

Event ? = ? -> Set

record MeasurableSpace (? : Set) : Set_1 where
  field
    Measurable : Event ? -> Set
    measurable-empty measurable-full : Measurable _
    measurable-compl : forall {E} -> Measurable E -> Measurable (not ? E)
    measurable-union? : forall {E : Nat -> Event ?} ->
      (forall n -> Measurable (E n)) -> Measurable (?? E)
    measurable-inter? : forall {E : Nat -> Event ?} ->
      (forall n -> Measurable (E n)) -> Measurable (?? E)

```

LebesgueUnitInterval is the explicit relative boundary of the formalization. It supplies literal interval points, Borel events, Lebesgue measure, classical proposition decisions needed for extensional events, dyadic intervals, and a convention for binary digits at dyadic boundaries. Its half-measure and finite-independence fields are the measure-theoretic facts used in §5; the development does not claim to construct this classical structure in `--safe Agda`.

Agda source

```

record LebesgueUnitInterval : Set_2 where
  field
    [0,1] : Set
    probabilities : ProbabilityValues
    borel : MeasurableSpace [0,1]
    lebesgue : ProbabilityMeasure borel probabilities
    classical : (P : Set) -> P ? not P
    dyadic : Nat -> Nat -> Event [0,1]
    dyadic-measurable : forall level index -> Measurable borel (dyadic level index)
    dyadic-measure : forall level index ->
      measure lebesgue (dyadic level index) == half-pow probabilities level
    digit : [0,1] -> Nat -> Bool
    digit-measurable : forall n b -> Measurable borel (DigitEvent digit n b)
    digit-half-true : forall n ->

```

```

measure lebesgue (DigitEvent digit n true) == ?# probabilities
digit-joint-independent : forall ns -> NoDuplicates ns -> forall bits ->
  measure lebesgue (DigitsEvent digit ns bits) ==
  half-pow probabilities (length ns)

```

Relative to such an L , Definition 4.1 is exactly a function $[0, 1] \rightarrow \mathcal{P}\mathbb{N}$ whose coordinate membership events are measurable.

Agda source

```

record RandomVar : Set_1 where
  constructor random-var
  field
    value : [0,1] L -> ?Nat
    coordinate : forall n ->
      Measurable (borel L) (fun t -> value t n)

```

2.11 Theorem 4.2 and equality events

Random application is pointwise graph application. Membership of m is a countable union over finite witnesses n , intersecting the event that all members of n occur in $Y(t)$ with the coordinate event $\text{pair } n \ m \in X(t)$. Those are exactly the closure operations in the measurable-space interface.

Agda source

```

_*?_ : RandomVar -> RandomVar -> RandomVar
X *? Y = random-var
  (fun t -> value X t * value Y t)
fun m -> measurable-union? (borel L) fun n ->
  measurable-inter (borel L)
    (all-measurable Y (members n))
    (coordinate X (pair n m))

thm-4-2 : forall X Y -> RandomVar
thm-4-2 X Y = X *? Y

```

Scott's event $\llbracket X = Y \rrbracket$ is represented as mutual inclusion, exactly as written in the paper. Each coordinate equality is a measurable Boolean combination, and the full event is their countable intersection. Its measure is then a well-typed probability value.

Agda source

```

?_?_? : RandomVar -> RandomVar -> Event ([0,1] L)
? X ? Y ? t =
  (forall n -> value X t n -> value Y t n) x
  (forall n -> value Y t n -> value X t n)

equality-event-measurable : forall X Y ->
  Measurable (borel L) ? X ? Y ?
equality-probability : RandomVar -> RandomVar ->
  Value (probabilities L)
equality-probability X Y =
  measure (lebesgue L) ? X ? Y ?

```

2.12 Definition 4.3: the sequentializer

Because members σ lists the last symbol first, the recursive `run` processes its tail before applying the head transition. This gives the composition order in Scott's display. `S-on` lifts a singleton sequence input to a continuous graph operator, and `S` is its threefold abstraction.

Agda source

```
F comp ? G = lam (fun X -> F * (G * X))

run F [] Q = Q
run F (n ? ns) Q =
  (F * singleton n) * run F ns Q

?-apply F sigma Q = run F (members sigma) Q
?-on F S Q m =
  Sigma Nat (fun sigma -> S sigma x ?-apply F sigma Q m)
? = lam (fun F -> lam (fun S -> lam (?-on F S)))
```

The public theorems connect the semantic recursion to actual graph application, prove composition, and state both recurrences extensionally. `S-re` is built from the semidecision closure layer.

Agda source

```
?-graph-run : forall F sigma Q m ->
  (((? * F) * singleton sigma) * Q) m <-> ?-apply F sigma Q m
comp ?-correct : forall F G X m ->
  ((F comp ? G) * X) m <-> (F * (G * X)) m
?-rec-empty : forall F Q m ->
  (((? * F) * singleton zero) * Q) m <-> (I * Q) m
?-rec-cons : forall F n a Q m ->
  (((? * F) * singleton (pair n a)) * Q) m <->
  (((F * singleton a) comp ? ((? * F) * singleton n)) * Q) m
?-re : RESet ?
```

2.13 Theorem 4.4: exactly the regular languages

The standard side is independent of Scott graphs: a DFA has a finite state list, initial-state proof, closed transition function, and Boolean acceptance. `StandardRegular` says that a finite-alphabet language is recognized by such a machine.

Agda source

```
record DFA (Alph : ?Nat) : Set where
  field
    states : List Nat
    start : Nat
    start-state : start in -list states
    step : Nat -> Nat -> Nat
    step-closed : forall {q a} -> q in -list states -> Alph a ->
      step q a in -list states
    accepting : Nat -> Bool

StandardRegular Alph L =
```

```
Finite Alph x Sigma (DFA Alph) (fun M ->
  forall sigma -> L sigma <-> ((sigma in * Alph) x Accepts M sigma))
```

The Scott side quantifies over finite codes for the alphabet, automaton graph, and initial state set. Acceptance is membership of zero after the sequentializer run.

Agda source

```
RegularIn Alph L =
  Finite Alph x
  Sigma Nat (fun a -> Sigma Nat (fun q ->
    forall sigma -> L sigma <->
      ((sigma in * Alph) x
        ?-apply (set_p a) sigma (set_p q) zero)))
```

For Scott-to-standard, finite graph entries determine a finite subset-state DFA; `run-scott` proves equality of every resulting state set. For standard-to-Scott, ordinary states are shifted by one and zero is inserted precisely for accepting states. The one-step and whole-run simulation lemmas feed the two translations.

Agda source

```
run-scott : forall Alph A q xs x ->
  run (set_p A) xs (set_p q) x <->
  set_p (runDFA (ScottDFA Alph A q) xs) x
dfa-run-scott : forall M alphabet ->
  (forall a -> Alph a <-> a in -list alphabet) ->
  forall xs -> WordIn Alph xs -> forall x ->
  run (set_p (dfa-graph-code M alphabet)) xs
  (set_p (dfa-start-code M)) x <->
  set_p (encode-list (state-list M (runDFA M xs))) x
standard -> scott : forall Alph L -> StandardRegular Alph L -> RegularIn Alph L
scott -> standard : forall Alph L -> RegularIn Alph L -> StandardRegular Alph L
thm-4-4 : forall Alph L -> StandardRegular Alph L <-> RegularIn Alph L
```

2.14 Theorem 4.5: probabilistic languages

The omitted side conditions in the prose theorem are bundled explicitly: the alphabet and initial state are finite codes, the oracle is random, its range lies in a listed finite family of finite graph elements, and the threshold lies between zero and one.

Agda source

```
record FiniteFiniteRange (A : RandomVar) : Set where
  field
    codes : List Nat
    covers : forall t -> Sigma Nat (fun code ->
      (code in -list codes) x
      (forall n -> value A t n <-> set_p code n))

record Theorem45Hypotheses : Set_1 where
  field
    Alphabet : ?Nat
```

```

alphabet-finite : Finite Alphabet
initial-code : Nat
oracle : RandomVar
oracle-range : FiniteFiniteRange oracle
threshold : Value (probabilities L)
threshold-lower : less-equal _ (0# _) threshold
threshold-upper : less-equal _ threshold (1# _)

```

The acceptance event uses graph-level $\mathbb{S}$, not merely `run`. `graph-accept-measurable` transports measurability across $\mathbb{S}$ -`graph-run`. `ThresholdLanguage` is Scott's displayed set, and `thm-4-5` packages event measurability with the literal $\#(E) > \delta$ characterization.

Agda source

```

GraphAcceptEvent A sigma Q t =
  ((? * value A t) * singleton sigma) * Q) zero

ThresholdLanguage H sigma =
  (sigma in * Alphabet H) x
  Above (GraphAcceptEvent (oracle H) sigma
    (set_p (initial-code H))) (threshold H)

thm-4-5 : forall H ->
  (forall sigma -> Measurable (borel L)
    (GraphAcceptEvent (oracle H) sigma (set_p (initial-code H)))) x
  (forall sigma -> ThresholdLanguage H sigma <->
    ((sigma in * Alphabet H) x Above
      (GraphAcceptEvent (oracle H) sigma (set_p (initial-code H)))
      (threshold H)))

```

2.15 Section 5: the fair independent oracle

The n th binary digit of the interval point chooses $\{0\}$ or $\{1\}$. `oracle-op` turns these choices into a continuous operator, and its graph is packaged as the random variable $\mathbb{T}$.

Agda source

```

Coin true m = m == zero
Coin false m = m == suc zero

coin-event n m t =
  (digit L t n == true x m == zero) ?
  (digit L t n == false x m == suc zero)

oracle-op t X m =
  Sigma Nat (fun n -> X n x coin-event n m t)
?-value t = lam (oracle-op t)
? = random-var ?-value ?-coordinate

```

`coin-application` unfolds lambda application. `coin-dichotomy` proves that every $\mathbb{T}(\{n\})$ is extensionally one of the two singleton sets. The equality event with $\{0\}$ is identified with the corresponding digit event, so its half measure and all finite joint-independence equations follow from the explicit Lebesgue interface.

Agda source

```
coin-application : forall t n m ->
  (value ? t * singleton n) m <-> Coin (digit L t n) m
coin-dichotomy : forall t n ->
  (forall m -> (value ? t * singleton n) m <-> m == zero) ?
  (forall m -> (value ? t * singleton n) m <-> m == suc zero)
coin-half : forall n ->
  measure (lebesgue L) (CoinZero n) == ?# (probabilities L)
coins-joint-independent : forall ns -> NoDuplicates ns ->
  measure (lebesgue L) (CoinZeros ns) ==
  half-pow (probabilities L) (length ns)
```

The original constructive Cantor/Borel modules remain available as an alternative model permitted by the paper. They are not used to disguise the literal $[0, 1]$ statements above.

3 Agda Architecture and Design Decisions

3.1 Scope and module layout

Every `--safe` library file is listed. The generated review copy `arxiv_with_code.md` repeats this index with GitHub links.

Module	File	Role
Scott2013	src/Scott2013.agda	Root import of every checked component
Scott2013.Prelude	src/Scott2013/Prelude.agda	K-free prelude; no standard library
Scott2013.GraphModel.Basic	src/Scott2013/GraphModel/Basic.agda	Pairing, set (n), Kleene star
Scott2013.GraphModel.Application	src/Scott2013/GraphModel/Application.agda	Application, λ , Theorems 3.1–3.6
Scott2013.Computability.RE	src/Scott2013/Computability/RE.agda	Fuel-indexed semidecision and r.e. closures
Scott2013.GraphModel.Combinators	src/Scott2013/GraphModel/Combinators.agda	I, K, S, ∇ , arithmetic encodings, RE, $\mathbb{S}$
Scott2013.GraphModel.Arithmetic	src/Scott2013/GraphModel/Arithmetic.agda	Application correctness of Succ, Pred, Test
Scott2013.GraphModel.UniversalRE	src/Scott2013/GraphModel/UniversalRE.agda	Graph equations (i)–(vi) and RE-re
Scott2013.GraphModel.Sequentializer	src/Scott2013/GraphModel/Sequentializer.agda	Graph recurrences and $\mathbb{S}$ -re
Scott2013.GraphModel.Topology	src/Scott2013/GraphModel/Topology.agda	Theorems 3.10–3.12
Scott2013.Automata.Finite	src/Scott2013/Automata/Finite.agda	Independent DFAs, words, StandardRegular

Module	File	Role
Scott2013.Automata. ScottEncoding	src/Scott2013/ Automata/Scott Encoding.agda	Both translations and Theorem 4.4
Scott2013.Measure Theory.Base	src/Scott2013/Measure Theory/Base.agda	Measurable spaces and probability measures
Scott2013.Measure Theory.Lebesgue	src/Scott2013/Measure Theory/Lebesgue.agda	Relative literal $[0, 1]$ interface
Scott2013.Stochastic. Lebesgue	src/Scott2013/ Stochastic/Lebesgue. agda	Literal RandomVar, Theorem 4.2, $\llbracket X = Y \rrbracket$
Scott2013.Stochastic. LebesgueTheorems	src/Scott2013/ Stochastic/Lebesgue Theorems.agda	Theorem 4.5 and fair independent oracle
Scott2013.Probability	src/Scott2013/ Probability.agda	Optional Cantor/Borel cylinder model
Scott2013.Stochastic	src/Scott2013/ Stochastic.agda	Optional Cantor random variables

3.2 Builtin naturals

The pairing module is self-contained: it uses `Agda.Builtin.Nat` and `Agda.Builtin.Equality` only. Scott’s pairing is not a Cantor pairing; the formalization uses the paper’s exact formula $2^n(2m + 1)$, written `2 ^ n * suc (m + m)`.

3.3 Type and model hierarchy

Arrows point from a type or constructor to the structures built from it. The three figures split the library along the paper: encodings and operators, languages, then the relative measure model.

3.4 Proof dependency structure

Arrows point from a checked lemma to a result that uses it. The first figure is the graph-model core; the second is recursive enumerability and regular languages; the third is the literal stochastic layer.

3.5 Module import graph

This is the actual `--safe` import order, not a planned layering.

3.6 Source-to-declaration ledger

The status column is deliberately strict: **exact** means the Agda statement has the same mathematical force as the paper; **partial** means that only a semantic surrogate, one implication, or examples are checked.

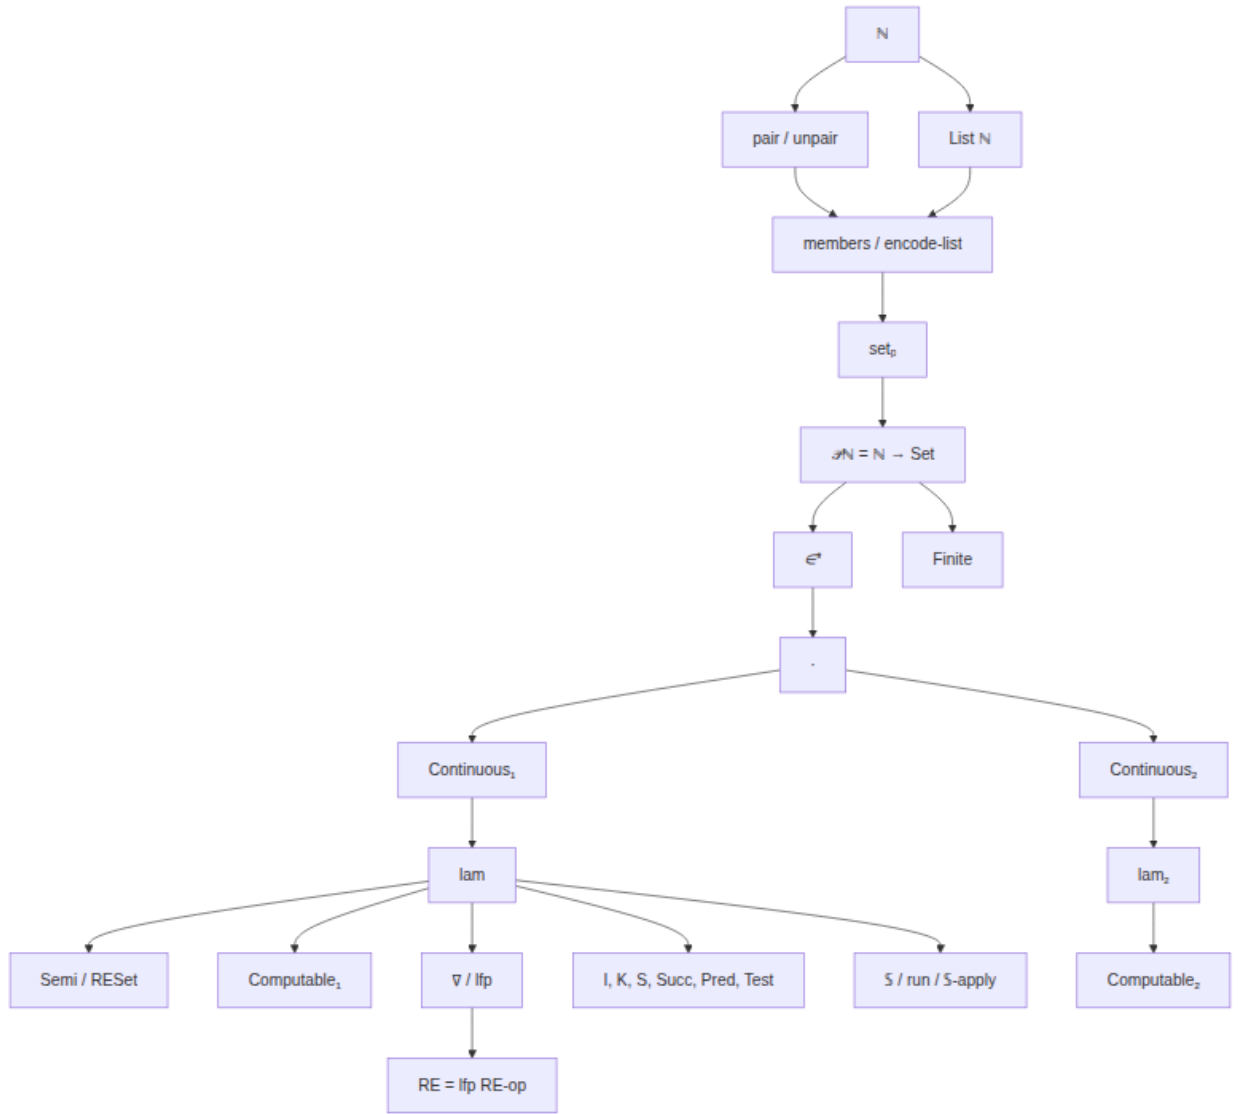


Figure 1: Graph-model encodings and operator types.

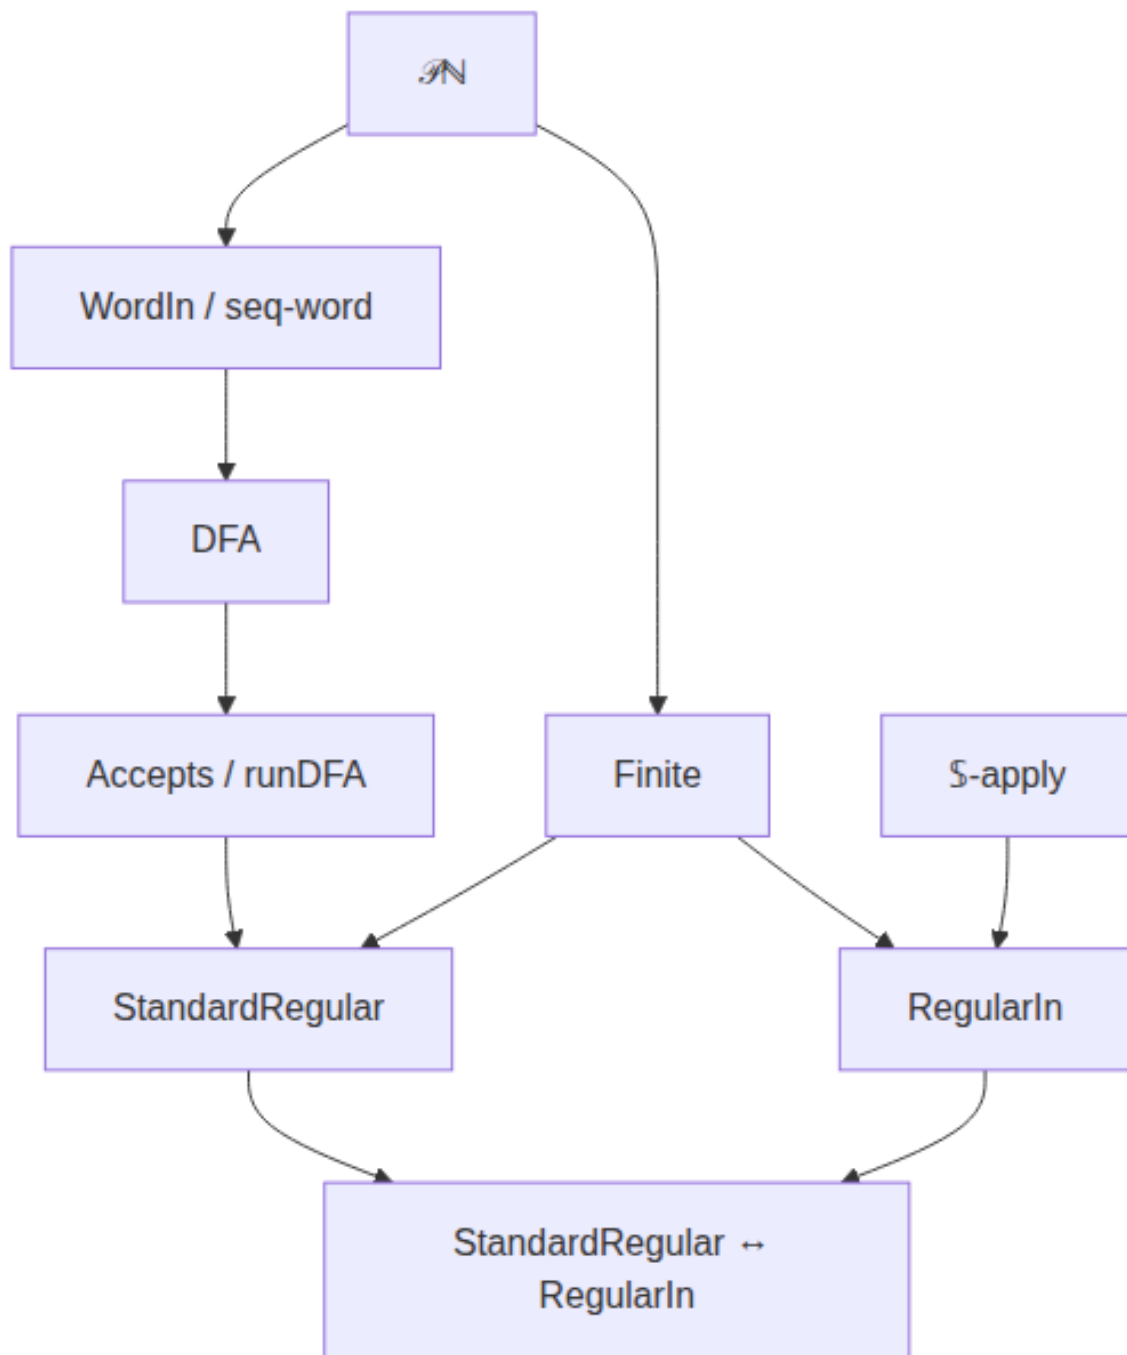


Figure 2: Language and automaton types.

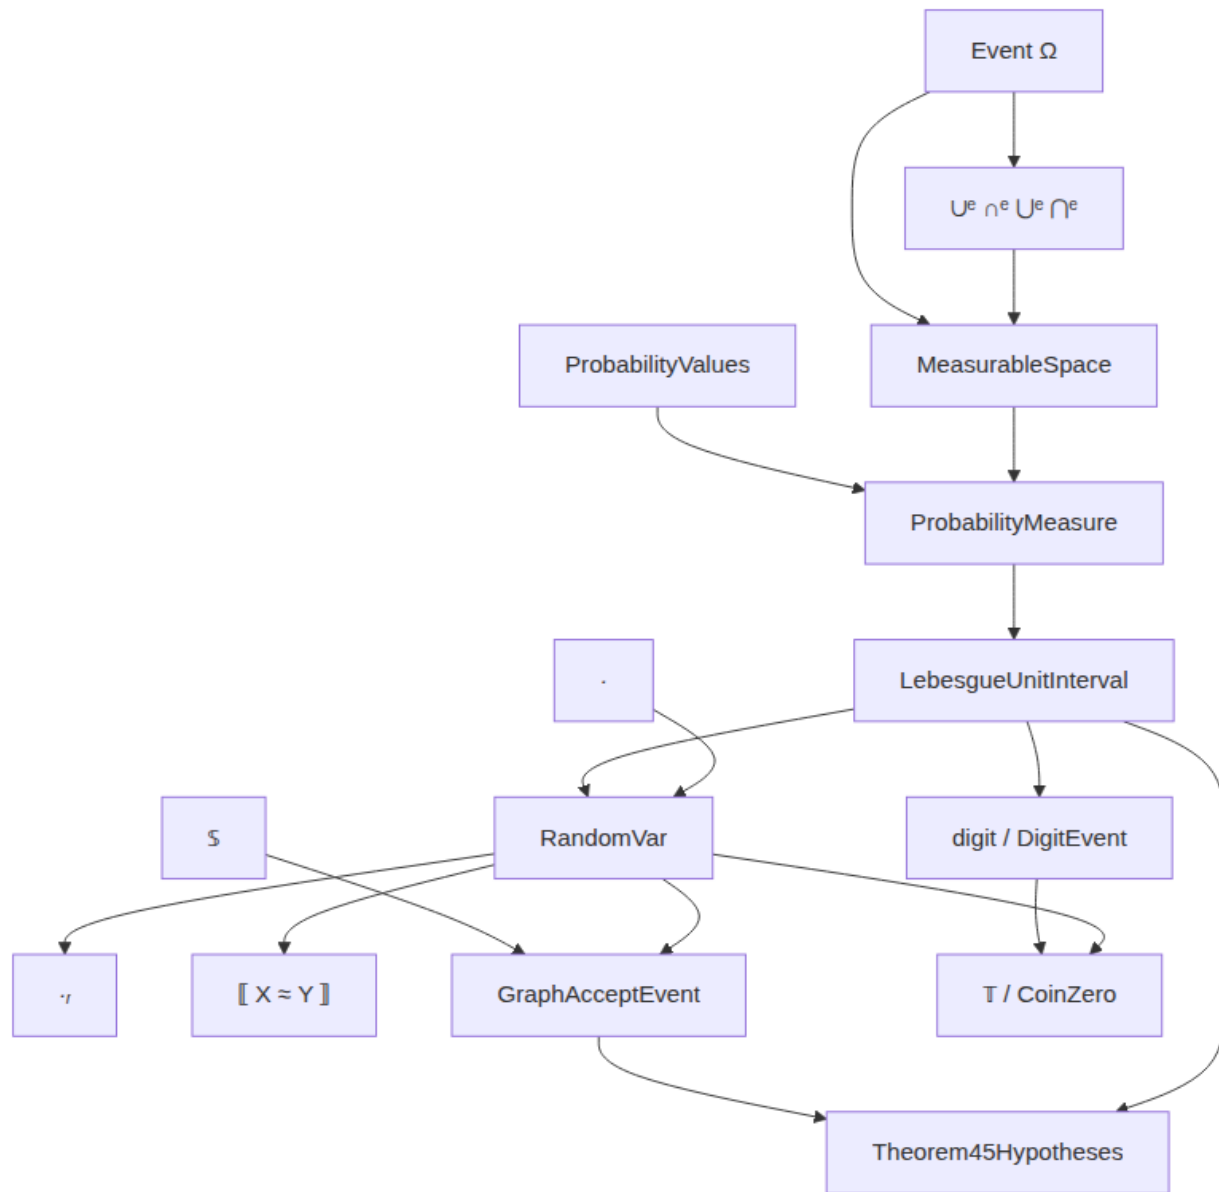


Figure 3: Relative Lebesgue and random-variable types.

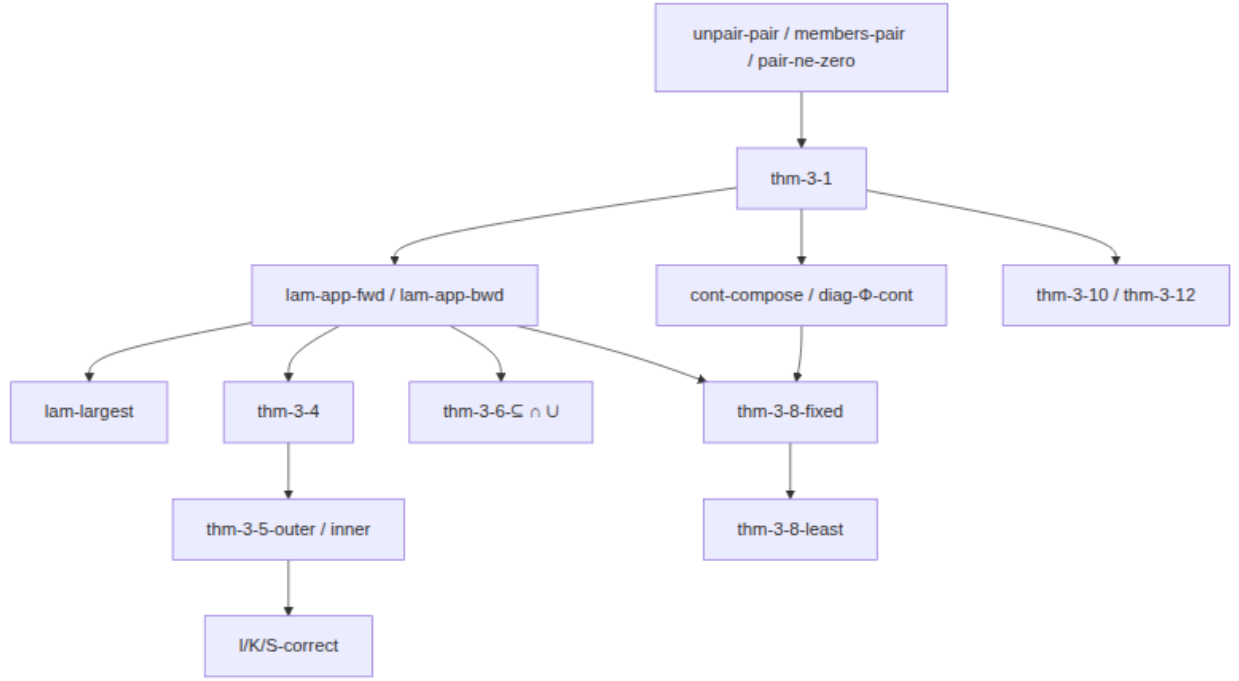


Figure 4: Graph-model proof dependencies through Theorem 3.8.

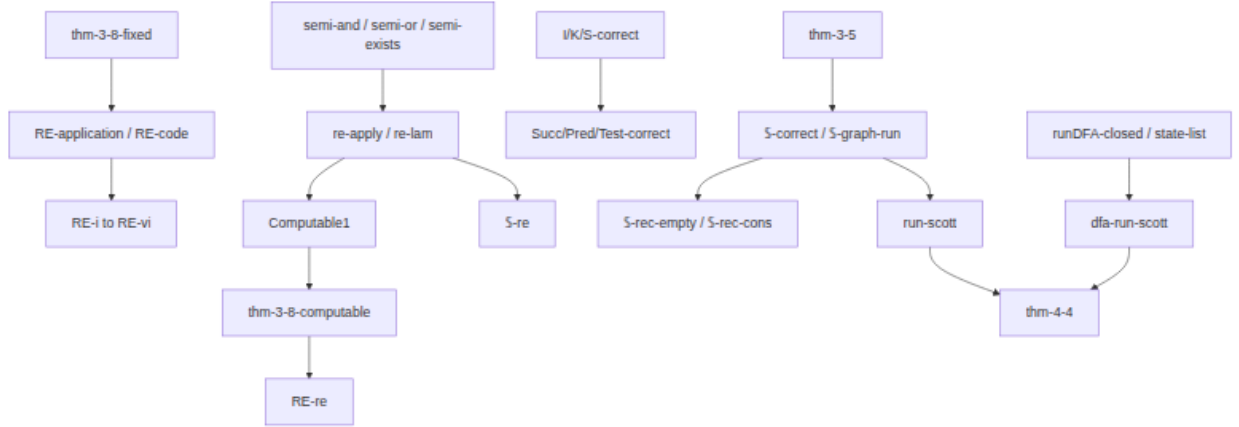


Figure 5: Recursive-enumerability, sequentializer, and Theorem 4.4 proof dependencies.

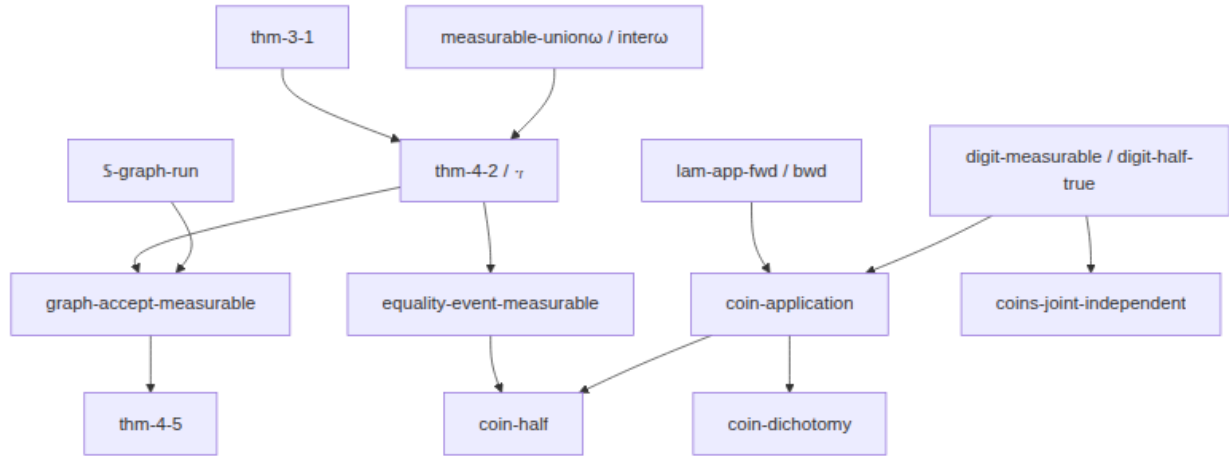


Figure 6: Literal Lebesgue proof dependencies for Theorems 4.2, 4.5, and §5.

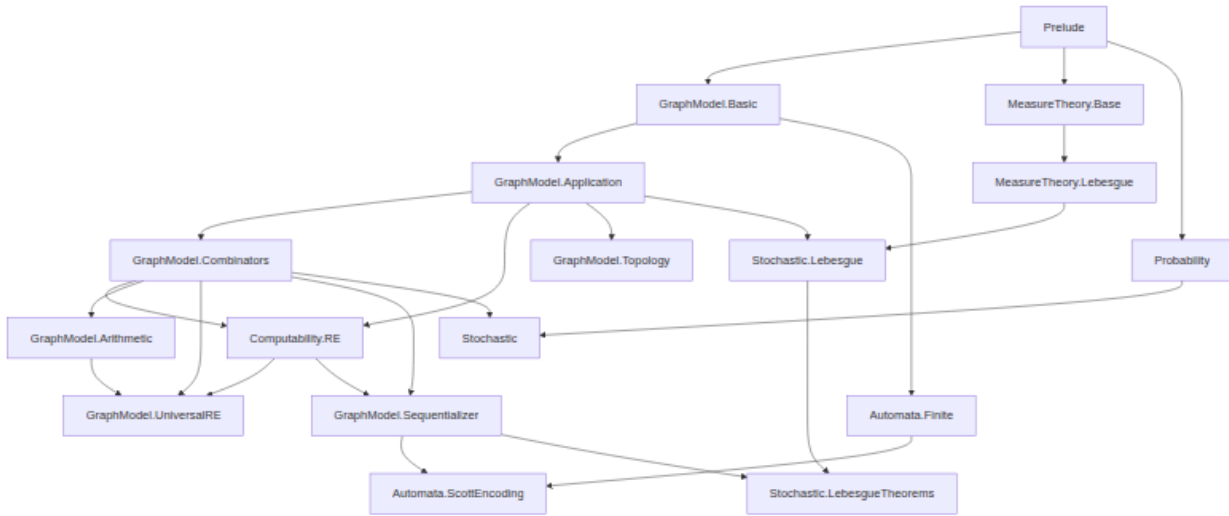


Figure 7: Implemented Agda module imports.

Paper obligation	Agda endpoint	Exact status
§2 pairing, sequences, $\text{set}(n)$, star	<code>pair</code> , <code>unpair-pair</code> , <code>members</code> , <code>set_p</code> , <code>_∈*_</code>	Exact
Definition 2.1	<code>_·_</code>	Exact
Definition 2.2	<code>Continuous₁</code> , <code>Continuous₂</code>	Exact for one and two arguments
Theorem 3.1	<code>thm-3-1</code>	Exact
Theorem 3.2	<code>lam-app-fwd</code> , <code>lam-app-bwd</code> , <code>lam-largest</code>	Exact
Definition 3.3	<code>lam</code>	Exact
Theorem 3.4 / Corollary 3.5	<code>thm-3-4</code> , <code>thm-3-5-*</code> , <code>o_o-correct</code>	Exact for the arities and composition used in the paper
Theorem 3.6	<code>thm-3-6-⊆/∩/∪</code> and reverses	Exact
Definition 3.7	<code>Semi</code> , <code>RESet</code> , <code>Computable₁</code> , <code>Computable₂</code>	Exact
Theorem 3.8, least fixed point	<code>thm-3-8-fp</code> , <code>thm-3-8-least</code>	Exact order-theoretic clause
Theorem 3.8, computability	<code>thm-3-8-computable</code>	Exact
I, K, S application	<code>I-correct-*</code> , <code>K-correct-*</code> , <code>S-correct-*</code>	Exact
Definition 3.9 arithmetic	<code>Succ-correct</code> , <code>Pred-correct</code> , <code>Test-correct</code>	Exact
Definition 3.9 universal RE	<code>RE-i-RE-vi</code> , <code>RE-op-computable</code> , <code>RE-re</code>	Exact
Theorem 3.10	<code>thm-3-10-*</code>	Exact relative to the explicit countable-basis presentation
Definition 3.11 / Theorem 3.12	<code>Injectivity.thm-3-12-*</code>	Exact relative to the paper's open-extension data
Definition 4.1	<code>Relative.RandomVar</code>	Exact relative to Lebesgue <code>UnitInterval</code> ; Cantor model separate
Theorem 4.2	<code>Relative.thm-4-2</code>	Exact
Equality-event paragraph after 4.2	<code>[[_≈_]]</code> , <code>equality-event-measurable</code> , <code>equality-probability</code>	Exact
Definition 4.3	<code>S-graph-run</code> , <code>S-rec-empty</code> , <code>S-rec-cons</code> , <code>S-re</code>	Exact
Theorem 4.4	<code>StandardRegular</code> , <code>thm-4-4</code>	Exact bidirectional theorem
Theorem 4.5	<code>Theorem45Hypotheses</code> , <code>GraphAcceptEvent</code> , <code>thm-4-5</code>	Exact relative Lebesgue statement
§5 fair oracle	<code>T</code> , <code>coin-dichotomy</code> , <code>coin-half</code> , <code>coins-joint-independent</code>	Exact relative to Lebesgue <code>UnitInterval</code>

4 Verification and Automated Pipeline

4.1 Typechecking and reproducible build

The development is checked with Agda `--safe` (locally Agda 2.6.3).

```
bash scripts/build_agda.sh
bash scripts/generate_arxiv_with_code.sh
```

Regenerate the PDF and arXiv zip with `bash scripts/build_arxiv_pdf.sh`.

4.2 LLM-assisted drafting and interactive proof verification

Large language models assist with transcription, scaffolding, and this report. Outputs are provisional until Agda accepts them. No large language model is listed as an author.

5 Discussion and Future Work

The ledger now has a checked endpoint for each definition, theorem, and substantive claim in §§2–5. Classical Lebesgue mathematics is explicitly relative to `LebesgueUnitInterval`; the constructive Cantor model remains available separately. The 1976 graph-model paper and the 2026 domain-valued random-variable development remain separate repositories.

6 Code Availability and Archival

The complete Agda development, report source, and build scripts are at the public GitHub repository named `scott2013` under `catskillsresearch`. This version is being prepared as Carnegie Mellon University School of Computer Science Technical Report **CMU-CS-26-XXX** and will be cross-archived on arXiv under **cs.LO** and **math.LO**.

6.1 License and source PDF

Original Agda code and author-written documentation are Apache-2.0. The source paper PDF and its transcription are not Apache-2.0; see the repository `NOTICE` and source-material `README` for the copyright carve-out.

7 Acknowledgments

7.1 AI-assisted development

Agda in this repository was drafted with AI-agent assistance under Lars Warren Ericson’s direction and review. The human authors retain responsibility for the mathematical content, the formalization route, and every formal claim. **No large language model is listed as a co-author.**

We gratefully acknowledge assistance from the following tools:

- **Cursor [Cur26]** — agent-assisted editing in the Cursor IDE: formalizing Scott’s 2013 *Stochastic λ -Calculi* extended abstract in Agda, `agda --safe repair`, vision-OCR transcription, drafting this

narrative (`arxiv.md`), and tracking the formalized inventory. Generated Agda was provisional until it typechecked under `--safe`.

- **Google Gemini 3.8 [Gem38]** — Google DeepMind’s Gemini 3.8 family as integrated in Cursor: alternative proof sketches, inventory review, and cross-checks of the PROGIC 2013 translation against the working transcription.
- **Cursor Grok 4.6 [Grk26]** — primary SpaceXAI / Cursor agent for the Agda `--safe` formalization of Scott’s 2013 *Stochastic λ -Calculus*: graph-model encodings, Cantor-space random variables, Theorem 4.2, `agda --safe` repair, drafting this narrative (`arxiv.md`), and tracking the formalized inventory.
- **GPT-5.6 [Gpt26]** — OpenAI’s GPT-5.6 family in Cursor (Sol variant) for Agda scaffolding, `agda --safe` repair, and long-running agent loops on `Scott2013/`. Generated Agda was provisional until it typechecked under `--safe`.
- **Cursor Composer 2.5 Fast [Cmp25]** — routine multi-step work: module scaffolding, dependency-ordered wiring of `Scott2013/GraphModel/`, documentation, and medium proof obligations where the strategy was already fixed.
- **Anthropic Claude Sonnet 5 (medium reasoning) [Son26]** — day-to-day formalization and proof-engineering in Cursor at the medium reasoning tier: inventory and narrative maintenance, module wiring, and medium-complexity Agda obligations where the proof strategy was already fixed.
- **Anthropic Claude Opus 4.8 (high reasoning) [Ant26]** — selective use for the heaviest proof work. Every emitted proof term was checked by Agda.

List of Figures

1	Graph-model encodings and operator types.	14
2	Language and automaton types.	15
3	Relative Lebesgue and random-variable types.	16
4	Graph-model proof dependencies through Theorem 3.8.	17
5	Recursive-enumerability, sequentializer, and Theorem 4.4 proof dependencies.	17
6	Literal Lebesgue proof dependencies for Theorems 4.2, 4.5, and §5.	18
7	Implemented Agda module imports.	18

8 References

- [Sco14] D. S. Scott. *Stochastic λ -calculi: An extended abstract*. Journal of Applied Logic **12** (2014), 369–376.
- [Sco76] D. S. Scott. *Data types as lattices*. SIAM Journal on Computing **5** (1976), 522–587.
- [Plo93] G. D. Plotkin. *Set-theoretical and other elementary models of the λ -calculus*. Theoretical Computer Science **121** (1993), 351–409.
- [Cur26] Anysphere, Inc. *Cursor: AI-native code editor and agent environment*. <https://cursor.com> (accessed 2026).
- [Gem38] Google DeepMind. *Gemini 3.8*. Technical documentation and model cards, <https://ai.google.dev/>; model documentation as integrated in Cursor, <https://cursor.com/docs/models> (accessed 2026).
- [Grk26] SpaceXAI and Anysphere, Inc. *Grok 4.6*. Official model card, <https://media.x.ai/v1/website/card-7f81d41b.pdf>; developer documentation, <https://docs.x.ai/developers/models/grok-4.6>; Cursor model page, <https://cursor.com/docs/models/grok-4-6>; Cursor announcement, <https://cursor.com/blog/grok-4-6> (accessed 2026).
- [Gpt26] OpenAI. *GPT-5.6 (Sol variant as integrated in Cursor)*. Model documentation, <https://cursor.com/docs/models/gpt-5-6-sol> (accessed 2026).
- [Cmp25] Anysphere, Inc. *Composer 2.5*. Model announcement and documentation, <https://cursor.com/blog/composer-2-5>; model card as integrated in Cursor, <https://cursor.com/docs/models> (accessed 2026).
- [Son26] Anthropic. *Claude Sonnet 5 (medium reasoning variant)*. System card, <https://www.anthropic.com/claude-sonnet-5-system-card>; model documentation as integrated in Cursor, <https://cursor.com/docs/models> (accessed 2026).
- [Ant26] Anthropic. *Claude Opus 4.8 (high thinking/reasoning variant)*. System card and announcement, <https://www.anthropic.com/news/claude-opus-4-8>; model documentation as integrated in Cursor, <https://cursor.com/docs/models/claude-opus-4-8> (accessed 2026).

A Agda module index

Checked by bash `scripts/build_agda.sh`. Complete sources: <https://github.com/cat-skillsresearch/scott2013>. Each subsection links to the corresponding file on GitHub.

Role	File
Root import graph	<code>src/Scott2013.agda</code>
K-free local prelude	<code>src/Scott2013/Prelude.agda</code>
Scott pairing and graph-model encodings	<code>src/Scott2013/GraphModel/Basic.agda</code>
Application, continuity, and λ -abstraction	<code>src/Scott2013/GraphModel/Application.agda</code>
Core combinators and fixed-point encodings	<code>src/Scott2013/GraphModel/Combinators.agda</code>
Semidecision and recursively enumerable closure layer	<code>src/Scott2013/Computability/RE.agda</code>
Arithmetic combinator correctness	<code>src/Scott2013/GraphModel/Arithmetic.agda</code>
Universal RE graph laws and r.e. witness	<code>src/Scott2013/GraphModel/UniversalRE.agda</code>
Sequentializer graph laws and r.e. witness	<code>src/Scott2013/GraphModel/Sequentializer.agda</code>
Universality and injectivity of the graph model	<code>src/Scott2013/GraphModel/Topology.agda</code>
Independent finite deterministic automata	<code>src/Scott2013/Automata/Finite.agda</code>
DFA/Scott translations and Theorem 4.4	<code>src/Scott2013/Automata/ScottEncoding.agda</code>
Abstract measurable spaces and probability measures	<code>src/Scott2013/MeasureTheory/Base.agda</code>
Relative literal unit-interval interface	<code>src/Scott2013/MeasureTheory/Lebesgue.agda</code>
Literal random variables and equality events	<code>src/Scott2013/Stochastic/Lebesgue.agda</code>
Theorem 4.5 and fair independent oracle	<code>src/Scott2013/Stochastic/LebesgueTheorems.agda</code>
Constructive Cantor/Borel alternative model	<code>src/Scott2013/Probability.agda</code>
Stochastic application in the Cantor model	<code>src/Scott2013/Stochastic.agda</code>

Primary source (PDF): [sources/ScottPROGIC2013.pdf](#) — Dana S. Scott, *Stochastic λ -calculi: An extended abstract* (J. Applied Logic 12, 2014; PROGIC 2013).

Total: 18 modules, 4323 lines of Agda.