

A Lean 4 Development of Interpreting Lambda Calculus in Domain-Valued Random Variables (CSL 2026)

Lars Warren Ericson¹

¹Catskills Research Company

¹<https://github.com/catskillsresearch/scott2026>

¹lars.ericson@catskillsresearch.com

September 6, 2026

ORCID: 0000-0001-8299-9361

Primary Category: cs.LO (Logic in Computer Science)

Secondary Category: math.LO (Logic)

Abstract

This note records a Lean 4 / mathlib formalization of Furber, Mardare, Panangaden, and Scott’s 2026 CSL paper *Interpreting Lambda Calculus in Domain-Valued Random Variables*. The paper develops Boolean-valued set theory and domain theory from scratch and shows how the λ -calculus can be interpreted using domain-valued random variables, building on Dana Scott’s vision of Boolean-valued models for probabilistic higher-type programming.

The library in `Scott2026/` is sorry-free and project-axiom-free. It covers the paper’s Boolean-valued universe V^A , the internal Engeler model, Theorems 26 and 30, Corollary 34, the general Lemma 35 / Proposition 36 oracle calculus, the measure algebra $A(X) = \Sigma/\mathcal{N}$, Propositions 39–42, Theorem 43, and Proposition 44. Domain-theory background is imported from a vendored copy of `scott1972` at `vendor/scott1972` (frozen SHA in `vendor/FROZEN.txt`). The development is packaged for `Palomar` with a Challenge / Solution pair and `formalization.yaml` metadata.

The paper’s authors were not contacted and did not participate in, review, or endorse this formalization. Lean is written by AI agents under the direction and review of the author, who takes sole responsibility for the mathematical content.

Proofs in this note are compact. Where a Lean argument fits in about ten lines, the snippet is copied from the library; otherwise the note states the theorem and points to the implementation in `Scott2026/`. The complete source is generated as Appendix A of the review copy (`scripts/generate_arxiv_with_code.sh` $\rightarrow$ `arxiv_with_code.md`).

- **GPT-5.6 [Gpt26]** — OpenAI’s GPT-5.6 family in Cursor (Sol variant) for Lean 4 / mathlib formalization, `lake build` repair, and long-running agent loops on `Scott2026/`. Generated Lean was provisional until it compiled under the pinned toolchain.
- **Anthropic Claude Fable 5 [Fab26]** — selective use in Cursor for the heaviest proof work and long-horizon formalization. Every emitted proof term was checked by the Lean kernel.
- **Anthropic Claude Opus 5 [Opu26]** — day-to-day formalization and proof-engineering in Cursor: inventory and narrative maintenance, module wiring, and medium-to-hard Lean obligations where the proof strategy was already fixed.
- **Cursor Grok 4.6 [Grk26]** — primary SpaceXAI / Cursor agent for Lean 4 / mathlib formalization, `lake build` repair, vision-OCR transcription, drafting this narrative (`arxiv.md`), and tracking the formalized inventory.

- **Cursor Composer 2.5** [Cmp25] — routine multi-step work: module scaffolding, dependency-ordered wiring of `Scott2026/`, documentation, and medium proof obligations where the strategy was already fixed.

1 Introduction

Boolean-valued models of set theory were introduced so that independence results—most famously the continuum hypothesis—could be read as statements about names and Boolean truth values rather than as metatheoretic constructions of forcing extensions [Sco67, Bell, Jech]. Scott later asked whether the same idea could serve *semantics*: if the Boolean algebra A is a measure algebra, then an A -valued set is a random variable taking values in a domain, and the internal language of V^A becomes a language of almost-sure statements about higher-type computation.

The CSL 2026 paper carries that program through for the untyped λ -calculus. It rebuilds, internally, the ingredients of a reflexive domain: A -posets, Scott continuity, the Engeler graph model $\mathcal{P}^A(\tilde{E})$, Church numerals, and a many-one comparison of subsets of $\mathbb{N}$ defined by λ -terms. The application (Theorem 43) produces two subsets of $\mathbb{N}$ that are incomparable under that λ -definable preorder, using independent fair coins as the underlying negligibility space. Proposition 44 records that one cannot shortcut the argument by treating $L^0(X; \mathcal{P}(Y))$ as a continuous dcpo: when $A(X)$ is non-atomic, it is not.

This formalization follows the paper’s numbered statements in dependency order. Weaker or special-case Lean theorems keep their original names; paper-type statements are introduced beside them (`theorem_30_va` beside `theorem_30`, `lemma_35_of` beside Engeler `lemma_35`, and so on). The working source is `sources/Scott2026.pdf`, with a searchable transcription in `sources/Scott2026_vision.md`. A related long version is [arXiv:2112.06339](https://arxiv.org/abs/2112.06339).

Three methodological choices are worth stating up front.

1. **Extensional ZFC boundary.** Ground sets are read through Mathlib’s `ZFSet` quotient. Raw `PSet` representatives remain an implementation device, used only where structural recursion needs them.
2. **Nontrivial Boolean algebras.** The paper’s distinctions ($\perp \neq \top$, numeral separation, strictness of `Oid(D)`) have no intended meaning in the one-element algebra. Lean states `[Nontrivial A]` exactly where those distinctions appear.
3. **Measure algebra as $\Sigma/\mathcal{N}$.** The paper’s $A(X)$ is the quotient of *measurable* sets by null sets (`MeasureAlgebra`). An all-sets presentation (`NegligibilitySpace.measurableRep`) is retained but is strictly stronger than Borel coin space can inhabit.

The formalization is **classical**. Every completed proof reports the standard mathlib footprint `[propext, Classical.choice, Quot.sound]`.

2 Scope and layout

The sorry-free development is about 38,000 lines across 38 Lean modules under `Scott2026/`, plus the vendored Scott 1972 continuous-lattice library. Deliberate proof holes occur only in the Mathlib-only `Challenge.lean`. The Palomar compared inventory is a Mathlib-expressible subset of Proposition 27; the remaining paper-type theorems are kernel-checked in the library and re-exported by `Solution.lean`.

Module cluster	Role
<code>VA</code> , <code>ExtensionalVA</code> , <code>Oid</code> , <code>Setoid</code> , <code>RelFun</code>	Boolean-valued names, A -setoids, mixing

Module cluster	Role
InternalDomain, InternalInterp, InternalEval*	Internal Definition 19 and the Theorem 26 evaluator
Theorem26, Theorem30Internal, Corollary34	Internal interpretation and Engeler in V^A
Domain, Lambda, Interp, Lemma35General, Prop36	Ground reflexive dcpos, Church calculus, oracles
Random, Coin	Measure algebra, L^0 , G_X , Propositions 42–44
Basic	Re-exports and inventory comments
Challenge / Solution	Palomar statement of record vs sorry-free proofs

Scott1972 is compiled from `vendor/scott1972 (srcDir; pin a198b6e, see vendor/FROZEN.txt)`, not as a Lake path/git dependency, so Palomar’s sandbox need not write outside `.lake/`.

3 How the proofs use Mathlib

The paper rebuilds a large fragment of Boolean-valued set theory and domain theory. Mathlib supplies the algebraic and measure-theoretic substrate; the paper-specific language (A -names, internal Scott continuity, Church combinators, G_X) is developed in `Scott2026/`.

Order and Boolean algebra. Complete Boolean algebras, Heyting implication, and complete lattices come from `Mathlib.Order.CompleteBooleanAlgebra` and `Mathlib.Order.CompleteLattice`. Internal predicates (`isFunctionB`, `isScottContinuousB`, `isReflexiveDcpoB`) are A -valued terms in that algebra, not Prop-valued class-instance searches.

ZFC presentations. `Mathlib.PSet / ZFSet (Mathlib.SetTheory.ZFC)` give a well-founded model of sets. We use `PSet` only for recursion (Church numerals as `PSet.omega`, pairing codes) and expose `ZFSet / checkExt` at the paper boundary, with representation-independence lemmas so two equivalent pre-sets cannot create a spurious failure of strictness.

Domain theory. Scott-open sets, way-below, and the injective extension operator `scottExtend` (Scott 1972, Props 2.11 / 3.8) come from the vendored `Scott1972` library, which itself sits on Mathlib topology (`IsEmbedding`, `Continuous`, Scott topology). Lemma 35(ii) applies `scottExtend` to the discrete numeral subspace and feeds the extension to `ReflexiveDcpo.lam`.


Measure theory. Fair coins are Mathlib Bernoulli measures (`Probability.Distributions.Bernoulli`) on `Bool`, extended by `Measure.infinitePi` to 2^ω and by `Measure.prod` to $2^\omega \times 2^\omega$. Nullity, countable unions, and `toMeasurable` are the usual `MeasureTheory` lemmas. The paper algebra `MeasureAlgebra` is a `Quotient` of `{s // MeasurableSet s}` by $\mu(s \triangle t) = 0$, with a `CompleteBooleanAlgebra` instance under `[IsFiniteMeasure]` (countable-chain-condition essential suprema).

Combinatorics of syntax. Capture-avoiding substitution needs `[Infinite Var]`. Countability of closed λ -terms for Theorem 43 uses an injective `Nat.pair` encoding (`Mathlib.Data.Nat.Pairing`).

What Mathlib does *not* provide, and what this library therefore builds, is the internal language of V^A : Boolean-valued membership and equality on names, the Oid equivalence, the relational evaluator of Definition 25, and the $A(X)$ -poset L^0 .

4 Proof dependency structure

The paper’s numbered results are not independent modules. The Lean import graph follows the published order: extensional names, then the internal evaluator, then Engeler in V^A , then numerals and oracles, then the measure-algebra example.

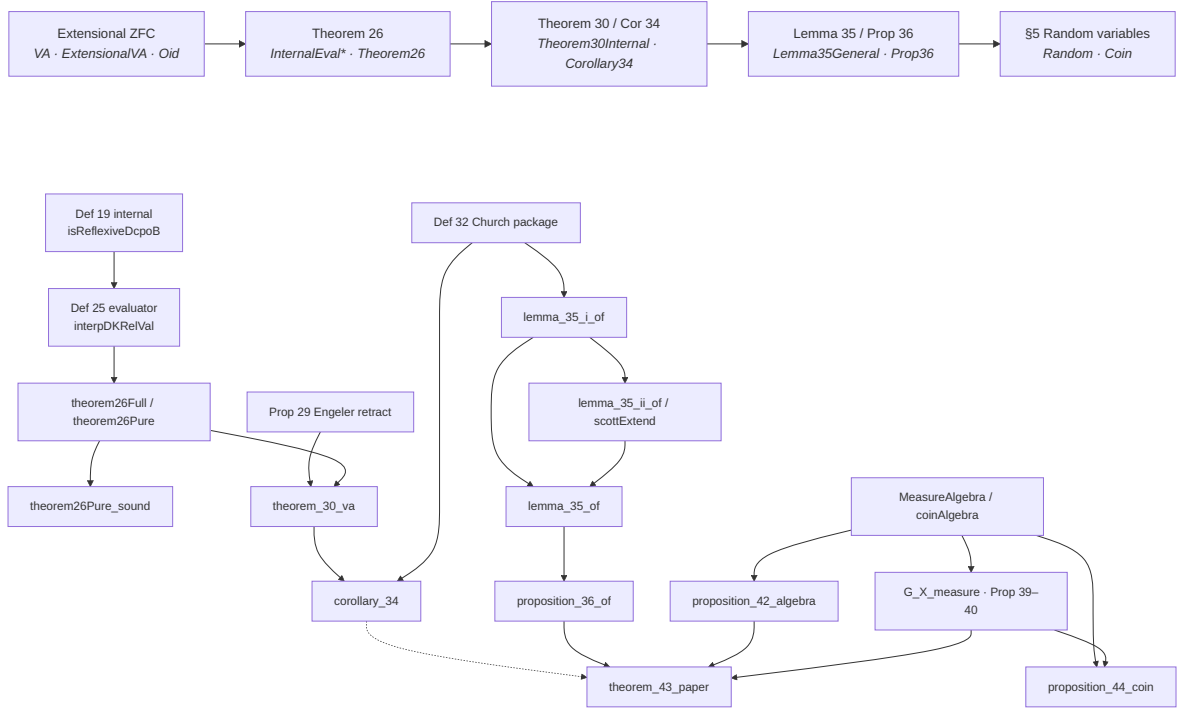

5 Theorem inventory

Paper names and Lean names. Weaker or special-case theorems keep their original names beside the paper-type theorems.

Paper	Paper-type Lean name	Weaker / special-case name
Proposition 27	<code>proposition_27 / proposition_27_finite_* wrappers</code>	<code>finite_subsets_countable</code>
Theorem 26	<code>theorem26Full / theorem26Pure / theorem26Pure_sound</code>	<code>theorem_26</code> (Engeler carrier)
Theorem 30	<code>theorem_30_va / theorem_30_internalModel</code>	<code>theorem_30</code> (canonical-carrier)
Corollary 34	<code>corollary_34</code>	<code>corollary_34_check</code>
Lemma 35	<code>lemma_35_of / lemma_35_i_of / lemma_35_ii_of</code>	<code>lemma_35</code> (Engeler)
Proposition 36	<code>proposition_36_of</code>	<code>proposition_36</code> (Engeler)
Proposition 42	<code>proposition_42_algebra</code>	<code>proposition_42</code> (raw coinMeasure)
Theorem 43	<code>theorem_43_paper</code>	<code>theorem_43</code> (external oracles)
Proposition 44	<code>proposition_44_coin / _measure / _dcpo</code>	<code>proposition_44</code> (all-sets algebra)

Further named results: `definition_25 / interp`, `lemma_31`, `definition_32`, `proposition_33`, `churchNotN / churchTest / churchWithNumerals`, `MeasureAlgebra / coinAlgebra /`

coinS1 / coinS2, G_X_measure, proposition_39_measure, proposition_40_measure, lemma_41_measure / lemma_41_algebra, not_isAtomic_coinAlgebra.

Compared Palomar declarations (Mathlib-only): proposition_27_finite_directed, proposition_27_finite_sUnion, proposition_27_finite_countable.

6 Proof notes

This section records strategy where the mechanization has to say more than the published text, and shows a short Lean fragment when the library proof is short. Longer constructions are cited by file.

6.1 Boolean-valued set theory and Oid

Jech’s lemmas on mixing, fullness, and Δ_0 reflection are `jech_lemma_14_18`, `theorem_1_iii`, and `jech_lemma_14_21`. The categorical equivalence between A -setoids and extensional names is `setAEquivSetoidR`. Completeness, totality, and strictness of $\text{Oid}(\mathcal{P}^A(X))$ are `theorem_17_va_*` / `proposition_28_va_*`. These are the substrate for every later internal statement: an internal function name is an A -valued relation that is single-valued and total at Boolean degree $\top$, then packaged as a `SetoidFHom` by Definition 16.

6.2 Theorem 26 — internal interpretation

Definition 25 interprets $\Lambda(D, \text{Var}, \mathfrak{K})$ by recursion on terms, in the internal language. The difficulty the paper leaves implicit is that abstraction must survive *fuzzy* environment updates: the body is interpreted along a pointwise Scott-continuous family, not a crisp substitution. The library therefore proves a fundamental lemma quantifying over `IsPointwiseFamily` environments (`InternalEvalFamily`, `InternalEvalComplete`), identifies application and abstraction body graphs as Scott-continuous maps into the internal function space C , and only then packs an evaluator name `interpDKGraph` (`InternalEvalPack`).

`theorem26Full` is then Definition 16 applied to that name:

Lean 4 source

```
noncomputable def theorem26Full
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top)
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?.D)) :
  SetoidFHom (oid (lamDKB ?.D V K)) (oid ?.D) :=
theorem26FullOfFunctionName ?.D V K
  (InternalReflexiveModel.interpDKGraph ? V K hK hV ?)
  (InternalReflexiveModel.interpDKGraph_isFunctionB ? V K hK hV ?)
  ?.complete
```

Soundness `theorem26Pure_sound` is the full `LamEq` theory (reflexivity, symmetry, transitivity, congruence, ξ , capture-avoiding β , α). The extra hypothesis actually needed is `OidSeparated V` (distinct variable keys are Boolean-unequal), together with `[Infinite V.idx]` for `Lam.substCA`. The Engeler-only `theorem_26` on `Set ℕ` is kept as a weaker packaging. Full proof: `Scott2026/InternalEvalCo` `InternalEvalPack.lean`, `Theorem26.lean`.

6.3 Theorem 30 and Corollary 34 — Engeler in V^A

Proposition 29’s `app/lam` pair is internalized as names `engelerFun` and `engelerLamB` on $D = \mathcal{P}^A(\omega)$. The retract `fun ∘ lam = idC` uses Scott continuity of $G \in C$ on the directed family of

finite subsets, plus membership of ground finite sets in the checked ω . The six-tuple of Definition 19 then has Boolean value $\top$:

The packaging of Corollary 34 is a conjunction, so the library proof is a tuple of already-proved conjuncts.

Lean 4 source

```
theorem corollary_34 [Nontrivial A] :
  isReflexiveDcpoB engelerD engelerR engelerC engelerQ
  engelerFun engelerLamB = top /\
  isContinuousLatticeSubsetB engelerD = top /\
  isBaseSubsetB (pfinB (checkExt PSet.omega)) engelerD = top /\
  Corollary34Check /\
  (eqB (child? (interpClosedVA churchTrue))
    (child? (interpClosedVA churchFalse)) = False) /\
  (forall n m, eqB (child? (interpClosedVA (churchNum n)))
    (child? (interpClosedVA (churchNum m)))) = top -> n = m) :=
<theorem_30_va, isContinuousLatticeSubsetB_powerB _,
  isBaseSubsetB_pfinB_powerB _, corollary_34_check,
  eqB_interpClosedVA_churchTrue_churchFalse,
  fun n m h => churchNum_interpClosedVA_injective h>
```

([Nontrivial A] is required for checkExt and for the last two conjuncts.) Full proof: Scott2026/Theorem30Internal.lean, Corollary34.lean.

6.4 Lemma 35 — discrete numerals and oracles

The paper derives closed tests $\mathbf{m}^?$ from Definition 32's if, pred, and 0?, then uses Scott-open separators and (for part (ii)) injectivity of continuous lattices. In Lean, churchNotN and churchTest live on $\mathbb{N}$ so that interpClosed_sound_full applies ([Infinite Var]). Transfer of the λ -equations is one rewrite:

Lean 4 source

```
theorem interpClosed_churchNotN_true {D : Type u} [CompleteLattice D]
  (R : ReflexiveDcpo D) :
  R.app (interpClosed R churchNotN) (interpClosed R churchTrueN) =
  interpClosed R churchFalseN := by
  rw [ <- interpClosed_app ]
  exact interpClosed_sound_full (Var := Nat) R churchNotN_true
```

Numeral injectivity is the paper's function argument: if $\llbracket c_m \rrbracket = \llbracket c_n \rrbracket$ then $\mathbf{fun}(\llbracket m^? \rrbracket)$ cannot send one to $\top$ and the other to $\perp$ (numeral_inj_of_churchTest). Part (ii) embeds the numeral subspace, notes that discreteness makes $g(\llbracket c_n \rrbracket) = \chi_A^D(n)$ continuous, and extends by scottExtend (Scott 1972). The retract identity lemma_35_ii_of_extension turns $\mathbf{lam} \bar{g}$ into the oracle. Full proof: Scott2026/Lambda.lean, Lemma35General.lean.

6.5 Proposition 36 — λ -definable many-one comparison

On a reflexive *continuous* lattice with Church numerals, paper (i) (some oracles) and (ii) (all oracles) are equivalent because Lemma 35(ii) supplies at least one pair. The library proof is exactly that pair of implications; ManyOneLe (an arbitrary $f : \mathbb{N} \rightarrow \mathbb{N}$) is kept separate, and the converse ManyOneLe $\rightarrow$ proposition_36_i is not claimed (exists_nat_fun_not_lambda_definable).

Lean 4 source

```
theorem proposition_36_of {D : Type*} [CompleteLattice D]
  (R : ReflexiveDcpo D)
```

```

(hbool : interpClosed R churchTrueN != interpClosed R churchFalseN)
(hcont : Scott1972.ContinuousLattice.IsContinuousLattice D)
(S_1 S_2 : Set Nat) :
proposition_36_i_of R hbool S_1 S_2 <->
  proposition_36_ii_of R hbool S_1 S_2 :=
<proposition_36_ii_of_i_of R hbool,
  proposition_36_i_of_ii_of R hbool hcont>

```

6.6 Measure algebra, G_X , and Proposition 42

`MeasureAlgebra` quotients measurable sets. The Boolean value of a measurable event is $\perp$ exactly when the event is null:

Lean 4 source

```

theorem mk_eq_bot [IsFiniteMeasure ?] {s : Set X}
  {hs : MeasurableSet s} :
  mk ? s hs = (False : MeasureAlgebra ?) <-> ? s = 0 := by
  rw [← mk_bot, mk_eq_iff, ae_empty_iff]

```

Equation (5) is `coinS1 n = mk (D1 n true)` (and likewise `coinS2`). Proposition 39–40 and Lemma 41 are restated on this algebra as `proposition_39_measure`, `proposition_40_measure`, `lemma_41_measure`; the un-suffixed names remain the all-sets `AssociatedAlgebra` forms. Proposition 42’s algebra form is four Boolean values equal to $\perp$: no finite standard preimage of S_1 or S_2 , and neither $S_1 = \check{f}^{-1}(S_2)$ nor the swap. Each conjunct is a Mathlib null-set calculation already in `proposition_42`, lifted by `mk_eq_bot`.

Lean 4 source

```

theorem proposition_42_algebra (f : Nat -> Nat) :
  (( bigcup K : Finset Nat, ? n, (coinS1 n ? checkSet K (f n)) sqcap
    (checkSet K (f n) ? coinS1 n) = False) /\
  (( bigcup K : Finset Nat, ? n, (coinS2 n ? checkSet K (f n)) sqcap
    (checkSet K (f n) ? coinS2 n) = False) /\
  ((? n, (coinS1 n ? coinS2 (f n)) sqcap (coinS2 (f n) ? coinS1 n) = False) /\
  ((? n, (coinS2 n ? coinS1 (f n)) sqcap (coinS1 (f n) ? coinS2 n) = False) :=
<iSup_eq_bot.mpr fun K => coinS1_finite_preimage_eq_bot f K,
  iSup_eq_bot.mpr fun K => coinS2_finite_preimage_eq_bot f K,
  coinS1_preimage_S2_eq_bot f, coinS2_preimage_S1_eq_bot f>

```

The finite- K join is over `Finset ℕ`, not the full internal $\mathcal{P}_{\text{fin}}^A(\check{\omega})$. Full proof: `Scott2026/Random.lean`, `Coin.lean`.

6.7 Theorem 43 — incomparable λ -degrees

The paper applies Theorem 1 to Lemma 35(ii) *inside* V^A , transports along G_X^{-1} , and intersects countably many conull sets. The library proof `theorem_43_paper` follows that *mathematical* recipe with one honest substitution of tools: oracles are fiberwise ground Lemma 35(ii) (`chiOracle` on the bit-sets), mixed as L^0 maps and pushed through `G_X_measure`, rather than a direct `theorem_1_iii` witness on an internalized Lemma 35 formula. Application is the existing Engeler operation `engelerAppA`. After Proposition 42 makes each numeral-mapping M null, countability of `Lam ℕ` (`lamEncode_injective`) and `measure_univ = 1` produce a point x ; $T_i = \{n \mid a_i(x) \cdot \llbracket c_n \rrbracket = \llbracket \top \rrbracket\}$ and Proposition 36 give both non-reducibility conclusions.

The statement is short; the construction of the conull set is not, so this note does not copy the body. After `exists_mem_paperGoodSet` the library defines T_i as the set of n with $a_i(x) \cdot \llbracket c_n \rrbracket = \llbracket \top \rrbracket$ and finishes with `proposition_36_i` in `Scott2026/Coin.lean`. The external-oracle theorem `theorem_43` is unchanged and has the same type.

6.8 Proposition 44 — L^0 is not a continuous dcpo

On a complete lattice the paper’s “continuous dcpo” is the existing way-below-sup predicate (`IsContinuousDcpo` aliases `IsContinuousLattice`). Transport along G_X reduces the claim to: the function space of a non-atomic complete Boolean algebra is not a continuous lattice. Faircoin `coinAlgebra` is non-atomic because any positive class splits along a first-sequence bit (or else determines that sequence and is null). Full proof: `proposition_44_coin` in `Coin.lean`; the `AssociatedAlgebra` form `proposition_44` is kept.

7 Source fidelity

Working source: `sources/Scott2026.pdf`. Vision transcription: `sources/Scott2026_vision.md` (produced by `scripts/ocr_pdf_pipeline.sh`).

7.1 Foundational convention

We read the paper’s ground sets extensionally, in ZFC. The Lean formalization therefore exposes ground-set parameters through Mathlib’s `ZFSet`; `PSet` is used only as an implementation-level well-founded presentation behind proved representation-independence lemmas. Boolean names use the quotient domain `AName.Dom`, and checked sets use `checkExt`, so duplicate pre-set presentations cannot create spurious failures of strictness.

We also believe the paper implicitly assumes that the complete Boolean algebra A is non-trivial. Statements that distinguish Boolean truth values or require $\perp \neq \top$ therefore state `[Nontrivial A]` explicitly. This is necessary: for the one-element Boolean algebra all Boolean equalities simultaneously have values $\top$ and $\perp$, so the paper’s numeral-separation and strictness conclusions cannot have their intended meaning.

7.2 Recorded divergences

- `proposition_42_algebra` finite- K is a `Finset` join (the paper’s fuzzy `pfinB` exists-quantifier is not fully internalized).
- `theorem_43_paper` uses fiberwise Lemma 35(ii) mixed in L^0/G_X measure, not a direct `theorem_1_iii` hookup; `theorem_43` remains the external-oracle form.
- All-sets `NegligibilitySpace.measurableRep / ofMeasure hN` is stronger than paper $\Sigma/\mathcal{N}$; paper $A(X)$ is `MeasureAlgebra`.
- Engeler-only `lemma_35 / proposition_36 / proposition_42 / theorem_43` keep weaker or special-case names.
- The Palomar Challenge locks only three Mathlib-only Proposition 27 wrappers. Headline theorems remain kernel-checked in `Scott2026/` and are re-exported by `Solution.lean`, but are not `Comparator`-locked because their types mention project definitions.

8 Build and preflight

The repository pins Lean / mathlib **v4.33.0** (`lean-toolchain`).

```
lake exe cache get
lake build
bash scripts/palomar_preflight.sh --mechanical-only # CI / routine
bash scripts/palomar_preflight.sh # before Palomar submission
bash scripts/generate_arxiv_with_code.sh # -> arxiv_with_code.md
```


`arxiv_with_code.md` is a generated review copy: this narrative plus **Appendix A**, a verbatim inlining of every `Scott2026/` Lean file (~38,000 lines). It is gitignored and stale whenever it is older than `arxiv.md` or any listed `.lean` file. Do not treat it as the inventory source of truth.

9 License and source PDF

Original Lean and author-written docs: Apache-2.0. `sources/Scott2026.pdf` and `sources/JechSetTheory20` are **not** Apache-2.0; see `NOTICE` and `sources/README.md`.

- [Gpt26] OpenAI. *GPT-5.6* (Sol variant as integrated in Cursor). Model documentation, <https://cursor.com/docs/models/gpt-5-6-sol> (accessed 2026).
- [Fab26] Anthropic. *Claude Fable 5*. Announcement, <https://www.anthropic.com/news/claude-fable-5-mythos-5>; system card, <https://www-cdn.anthropic.com/2f9323abbcc4abe23/Claude%20Fable%205%20&%20Claude%20Mythos%205%20System%20Card.pdf>; Cursor model page, <https://cursor.com/docs/models/claude-fable-5> (accessed 2026).
- [Opu26] Anthropic. *Claude Opus 5*. Announcement, <https://www.anthropic.com/research/claude-opus-5>; model documentation as integrated in Cursor, <https://cursor.com/docs/models/claude-opus-5> (accessed 2026).
- [Grk26] SpaceXAI and Anysphere, Inc. *Grok 4.6*. Official model card, <https://media.x.ai/v1/website/card-7f81d41b.pdf>; developer documentation, <https://docs.x.ai/developers/models/grok-4.6>; Cursor model page, <https://cursor.com/docs/models/grok-4-6>; Cursor announcement, <https://cursor.com/blog/grok-4-6> (accessed 2026).
- [Cmp25] Anysphere, Inc. *Composer 2.5*. Model announcement and documentation, <https://cursor.com/blog/composer-2-5>; model card as integrated in Cursor, <https://cursor.com/docs/models/composer-2-5> (accessed 2026).

A Complete Lean source

Role	File
Root import graph	<code>Scott2026.lean</code>
Boolean connectives and Hilbert calculus	<code>Scott2026/BooleanLogic.lean</code>
A-setoids and mixing	<code>Scott2026/Setoid.lean</code>
Relational functionals	<code>Scott2026/RelFun.lean</code>
Setoid categories	<code>Scott2026/Categories.lean</code>
A-subsets and checks	<code>Scott2026/PowerSet.lean</code>
Oid equivalence	<code>Scott2026/Oid.lean</code>
<code>Set_A</code>	<code>Scott2026/SetCategory.lean</code>
Oid strictness and completeness	<code>Scott2026/OidEssential.lean</code>
Raw-power regression tests	<code>Scott2026/RawPowerStrict.lean</code>
Boolean-valued names (Jech / Theorem 1)	<code>Scott2026/VA.lean</code>
Extensional ZFC boundary	<code>Scott2026/ExtensionalVA.lean</code>
Internal way-below / continuous lattices	<code>Scott2026/InternalDomain.lean</code>
Propositions 27–28	<code>Scott2026/Proposition28.lean</code>
Ground reflexive dcpos	<code>Scott2026/Domain.lean</code>

Role	File
λ -syntax and Definition 32 combinators	Scott2026/Lambda.lean
Ground interpretation (Definition 25)	Scott2026/Interp.lean
Engeler model (Proposition 29)	Scott2026/Engeler.lean
Internal Engeler application	Scott2026/EngelerVA.lean
Internal reflexive dcpos	Scott2026/ReflexiveVA.lean
Internal pure λ -syntax	Scott2026/LambdaVA.lean
Constant-bearing syntax	Scott2026/LambdaConstVA.lean
Ground constant interpretation	Scott2026/InterpConst.lean
Internal interpretation (Engeler carrier)	Scott2026/InterpVA.lean
Internal constant interpretation	Scott2026/InterpConstVA.lean
Relational calculus for evaluation	Scott2026/InternalInterp.lean
Internal evaluator recursion	Scott2026/InternalEval.lean
Pointwise environment families	Scott2026/InternalEvalFamily.lean
Scott continuity of app/abs	Scott2026/InternalEvalComplete.lean
Evaluator name and Theorem 26 packing	Scott2026/InternalEvalPack.lean
Exact Theorem 26	Scott2026/Theorem26.lean
Exact Theorem 30	Scott2026/Theorem30Internal.lean
Lemma 31 (check/VA agreement)	Scott2026/Lemma31.lean
Corollary 34	Scott2026/Corollary34.lean
General Lemma 35	Scott2026/Lemma35General.lean
Proposition 36	Scott2026/Prop36.lean
Measure algebra, L, G_X	Scott2026/Random.lean
Coin space; Props 42–44; Theorem 43	Scott2026/Coin.lean
Re-exports and inventory	Scott2026/Basic.lean

Primary source (PDF): [sources/Scott2026.pdf](#) — Furber, Mardare, Panangaden, and Scott, *Interpreting Lambda Calculus in Domain-Valued Random Variables* (LIPIcs, CSL 2026).

Files appear in dependency order (`Basic.lean` last). Each block is a verbatim copy of the repository file at generation time. Vendored `Scott1972/` sources are not inlined; see `vendor/scott1972`.

A.1 Scott2026.lean

8 lines.

Lean 4 source

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
Github: https://github.com/catskillsresearch/scott2026
-/

import Scott2026.Basic

```

A.2 Scott2026/BooleanLogic.lean

50 lines.

Lean 4 source

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/

import Mathlib.Order.CompleteBooleanAlgebra

/-!
# Boolean-valued propositional and first-order connectives

Furber-Mardare-Panangaden-Scott, CSL 2026, S2: a complete Boolean algebra `A`
interprets the connectives of propositional logic; completeness interprets
`forall` as a meet and `exists` as a join. Validity means Boolean value `top`.
-/

namespace Scott2026

variable {A : Type*} [CompleteBooleanAlgebra A]

/-- A statement with Boolean value `a` is *valid* when `a = top`. -/
def IsValid (a : A) : Prop := a = top

@[simp] theorem isValid_top : IsValid (top : A) := rfl

theorem isValid_inf {a b : A} (ha : IsValid a) (hb : IsValid b) : IsValid (a sqcap b) := by
  unfold IsValid at ha hb |-
  rw [ha, hb, top_inf_eq]

theorem valid_of_le_valid {a b : A} (h : a <= b) (ha : IsValid a) : IsValid b := by
  unfold IsValid at ha |-
  exact top_unique (ha |> h)

/-- Existential quantification as a join (paper S2). -/
def bExists {? : Sort*} (f : ? -> A) : A := bigcup i, f i

/-- Universal quantification as a meet (paper S2). -/
def bForall {? : Sort*} (f : ? -> A) : A := ? i, f i

theorem bExists_le_iff {? : Sort*} {f : ? -> A} {a : A} :
  bExists f <= a <-> forall i, f i <= a := iSup_le_iff

theorem le_bForall_iff {? : Sort*} {f : ? -> A} {a : A} :
  a <= bForall f <-> forall i, a <= f i := le_iInf_iff

/-- Mixing / ?maximum principle? shape used in Theorem 1 (iii) and Definition 4. -/
def Compatible {? : Sort*} (eq : ? -> ? -> A) (a : ? -> A) : Prop :=
  forall i j, a i sqcap a j <= eq i j

end Scott2026

```

A.3 Scott2026/Setoid.lean

449 lines.

Lean 4 source (lines 1–400)

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/

```

```

import Mathlib.Order.CompleteBooleanAlgebra
import Mathlib.Order.Zorn
import Scott2026.BooleanLogic

universe v

/-!
# Boolean-valued setoids and posets (CSL 2026, S3)

An  $\mathcal{A}$ -setoid is a set equipped with an  $\mathcal{A}$ -valued partial equivalence relation
(Definitions 4-11, Lemma 12).
-/

namespace Scott2026

variable {A : Type*} [CompleteBooleanAlgebra A]

/-- Helper: rearrange four infima into two pairs. -/
theorem inf_inf_inf_comm (a b c d : A) :
  (a sqcap b) sqcap (c sqcap d) = (a sqcap c) sqcap (b sqcap d) := by
  calc
    (a sqcap b) sqcap (c sqcap d) = a sqcap (b sqcap (c sqcap d)) := inf_assoc a b
    (c sqcap d)
    _ = a sqcap ((b sqcap c) sqcap d) := by rw [ <- inf_assoc b c d]
    _ = a sqcap ((c sqcap b) sqcap d) := by rw [inf_comm b c]
    _ = a sqcap (c sqcap (b sqcap d)) := by rw [inf_assoc c b d]
    _ = (a sqcap c) sqcap (b sqcap d) := (inf_assoc a c (b sqcap d)).symm

/-- Two joins are disjoint as soon as the generators are. -/
theorem sSup_inf_sSup_eq_bot {s t : Set A}
  (h : forall c in s, forall d in t, c sqcap d = False) : sSup s sqcap sSup t =
  False := by
  rw [sSup_inf_eq]
  refine iSup_eq_bot.mpr fun c => iSup_eq_bot.mpr fun hc => ?_
  rw [inf_sSup_eq]
  exact iSup_eq_bot.mpr fun d => iSup_eq_bot.mpr fun hd => h c hc d hd

/-- An  $\mathcal{A}$ -valued setoid: a set with a symmetric, transitive  $\mathcal{A}$ -valued equality
(paper S3, before Definition 4). Reflexivity is not assumed. -/
structure ASetoid (X : Type*) where
  eq : X → X → A
  symm : forall x y, eq x y = eq y x
  trans : forall x y z, eq x y sqcap eq y z <= eq x z

namespace ASetoid

variable {X Y : Type*} (S : ASetoid (A := A) X) (T : ASetoid (A := A) Y)

/--  $\text{?}_X(x) = ?x = x?_X$ , the degree to which  $x$  in  $X$ . -/
def eps (x : X) : A := S.eq x x

theorem eq_le_eps_left (x y : X) : S.eq x y <= S.eps x := by
  have h : S.eq x y sqcap S.eq y x <= S.eq x x := S.trans x y x
  have : S.eq x y sqcap S.eq x y <= S.eq x x := by
    simpa [S.symm y x] using h
  simpa [ASetoid.eps] using this

theorem eq_le_eps_right (x y : X) : S.eq x y <= S.eps y := by
  rw [S.symm]
  exact S.eq_le_eps_left y x

/-- Totality:  $\text{?}x = x? = 1$  for all  $x$ . -/
def IsTotal : Prop := forall x : X, S.eps x = top

```

```

/-- Strictness: `x = y? = 1` implies `x = y`. -/
def IsStrict : Prop := forall x y : X, S.eq x y = top -> x = y

/-- Definition 4 (i): mixing along a compatible family. The index type is
universe-polymorphic (`Type v`, auto-bound) so a complete setoid can mix a
family indexed by another setoid's underlying type (`Type*`), as Definition 13
requires. The sort mentions `v` so the Prop stays universe-polymorphic. -/
def IsComplete : Sort (imax (v + 1) 0) :=
  forall (? : Type v) (a : ? -> A) (x : ? -> X),
    (forall i j, a i sqcap a j <= S.eq (x i) (x j)) ->
      exists y : X, forall i, a i <= S.eq (x i) y

/-- Definition 4 (ii): mixing along a pairwise disjoint family with `a_i <= ?(x_i)`. -/
def IsCompleteDisjoint : Sort (imax (v + 1) 0) :=
  forall (? : Type v) (a : ? -> A) (x : ? -> X),
    (Pairwise fun i j => a i sqcap a j = False) ->
      (forall i, a i <= S.eps (x i)) ->
        exists y : X, forall i, a i <= S.eq (x i) y

/-- Definition 4 (i) implies Definition 4 (ii). -/
theorem IsComplete.toDisjoint (h : IsComplete.{v} S) : IsCompleteDisjoint.{v} S := by
  intro ? a x hdis h?
  refine h ? a x fun i j => ?_
  by_cases hij : i = j
  * subst hij
  * simp [ASetoid.eps] using h? i
  * have : a i sqcap a j = False := hdis hij
  simp [this]

/-- Definition 4 (ii) implies Definition 4 (i). A maximal pairwise disjoint family of
pieces `b <= a i` has join `bigcup i, a i`, so mixing along it also mixes the original
compatible family. -/
theorem IsCompleteDisjoint.toComplete (h : IsCompleteDisjoint.{v} S) : IsComplete.{v} S := by
  classical
  intro ? a x hcomp
  -- Pairs `(b, i)` with `b <= a i`, collected into pairwise disjoint sets.
  let D : Set (A x ?) := {p | p.1 <= a p.2}
  let ? : Set (Set (A x ?)) := {W | W subseq D /\ Set.Pairwise W fun p q => p.1 sqcap
    q.1 = False}
  have hunion (c : Set (Set (A x ?))) (hcS : c subseq ?) (hchain : IsChain (* subseq
    *) c) :
    ?_0 c in ? /\ forall s in c, s subseq ?_0 c := by
    refine <<?_, ?_, fun _ => Set.subset_sUnion_of_mem>
  * rintro p <W, hWc, hpW>
  exact (hcS hWc).1 hpW
  * rintro p <W_1, hW_1c, hpW_1> q <W_2, hW_2c, hpW_2> hpq
  rcases eq_or_ne W_1 W_2 with rfl | hW
  * exact (hcS hW_1c).2 hpW_1 hpq
  * rcases hchain hW_1c hW_2c hW with hle | hle
  * exact (hcS hW_2c).2 (hle hpW_1) hpq
  * exact (hcS hW_1c).2 hpW_1 (hle hpW_2) hpq
  obtain <W, hWmax> := zorn_subset ? fun c hcS hchain =>
    <?_0 c, (hunion c hcS hchain).1, (hunion c hcS hchain).2>
  have hWD : W subseq D := hWmax.1.1
  have hWpair : Set.Pairwise W fun p q => p.1 sqcap q.1 = False := hWmax.1.2
  -- The refinement, reindexed by `?`.
  let b : ? -> A := fun i => sSup {u : A | (u, i) in W}
  have hb_le : forall i, b i <= a i := fun i => sSup_le fun u hu => hWD hu
  have hb_dis : Pairwise fun i j => b i sqcap b j = False := by
    intro i j hij
    refine sSup_inf_sSup_eq_bot fun u hu v hv => ?_
    exact hWpair hu hv (by simp [Prod.ext_iff, hij])

```

```

have ha_eps : forall i, a i <= S.eps (x i) := fun i => by
  simpa [ASetoid.eps] using hcomp i i
have hb_eps : forall i, b i <= S.eps (x i) := fun i => (hb_le i).trans (ha_eps i)
-- Maximality: the refinement covers every `a i`.
have hcover : forall i, a i <= bigcup j, b j := by
  intro i
  have hle_g : forall p in W, p.1 <= bigcup j, b j := by
    rintro <u, j> hp
    exact (le_sSup (show u in {v : A | (v, j) in W} from hp)).trans (le_iSup b j)
  by_contra hne
  have hiff : a i <= (bigcup j, b j) <-> a i sqcap (bigcup j, b j)? = False := by
    rw [ <- disjoint_compl_right_iff, disjoint_iff]
  have hdne : a i sqcap (bigcup j, b j)? != False := mt hiff.mpr hne
  have hdisj : forall p in W, (a i sqcap (bigcup j, b j)?) sqcap p.1 = False := by
    intro p hp
    refine le_bot_iff.mp ?_
    calc (a i sqcap (bigcup j, b j)?) sqcap p.1
      <= (bigcup j, b j)? sqcap bigcup j, b j := inf_le_inf inf_le_right (hle_g p
hp)
      _ = False := by rw [inf_comm]; exact inf_compl_eq_bot
  have hinsert : insert (a i sqcap (bigcup j, b j)?, i) W in ? :=
    <Set.insert_subset_iff.mpr <inf_le_left, hWD>,
    hWpair.insert fun p hp _ => <hdisj p hp, by rw [inf_comm]; exact hdisj p hp>>
  have hdW : (a i sqcap (bigcup j, b j)?, i) in W := Maximal.mem_of_prop_insert hWmax
  hinsert
  exact hdne (by simpa using hdisj _ hdW)
obtain <y, hy> := h ? b x hb_dis hb_eps
refine <y, fun i => ?_>
have hai : a i = bigcup j, a i sqcap b j := by
  rw [ <- inf_iSup_eq]
  exact (inf_eq_left.mpr (hcover i)).symm
rw [hai]
refine iSup_le fun j => ?_
refine le_trans ?_ (S.trans (x i) (x j) y)
exact le_inf ((inf_le_inf_left (a i) (hb_le j)).trans (hcomp i j))
  (inf_le_right.trans (hy j))

/-- Definition 4: the two forms of completeness agree. -/
theorem isComplete_iff_isCompleteDisjoint : IsComplete.{v} S <-> IsCompleteDisjoint.{v} S :=
  <IsComplete.toDisjoint S, IsCompleteDisjoint.toComplete S>

/-- A complete setoid is inhabited (mix the empty family). -/
theorem IsComplete.nonempty (h : IsComplete.{v} S) : Nonempty X := by
  let a : PEmpty.{v + 1} -> A := fun i => nomatch i
  let x : PEmpty.{v + 1} -> X := fun i => nomatch i
  obtain <y, _> := h PEmpty.{v + 1} a x fun i => nomatch i
  exact <y>

/-- Definition 5: a bijection strictly preserving `A`-valued equality. -/
structure StrictIso (S : ASetoid (A := A) X) (T : ASetoid (A := A) Y) where
  toFun : X -> Y
  invFun : Y -> X
  left_inv : forall x, invFun (toFun x) = x
  right_inv : forall y, toFun (invFun y) = y
  preserve_eq : forall x_1 x_2, T.eq (toFun x_1) (toFun x_2) = S.eq x_1 x_2

namespace StrictIso

variable {S : ASetoid (A := A) X} {T : ASetoid (A := A) Y}

theorem injective (f : StrictIso S T) : Function.Injective f.toFun :=
  Function.LeftInverse.injective f.left_inv

```

```

theorem surjective (f : StrictIso S T) : Function.Surjective f.toFun :=
  Function.RightInverse.surjective f.right_inv

theorem total_iff (f : StrictIso S T) : S.IsTotal <-> T.IsTotal := by
  constructor
  * intro hS y
    have heq : T.eq y y = S.eq (f.invFun y) (f.invFun y) := by
      simpa [f.right_inv] using f.preserve_eq (f.invFun y) (f.invFun y)
    change T.eps y = top
    rw [ASetoid.eps, heq]
    exact hS (f.invFun y)
  * intro hT x
    have heq : T.eq (f.toFun x) (f.toFun x) = S.eq x x := f.preserve_eq x x
    change S.eps x = top
    rw [ASetoid.eps, <- heq]
    exact hT (f.toFun x)

theorem strict_iff (f : StrictIso S T) : S.IsStrict <-> T.IsStrict := by
  constructor
  * intro hS y_1 y_2 hy
    have heq := f.preserve_eq (f.invFun y_1) (f.invFun y_2)
    rw [f.right_inv, f.right_inv] at heq
    have hinv : f.invFun y_1 = f.invFun y_2 := hS _ _ (heq.symm.trans hy)
    calc y_1 = f.toFun (f.invFun y_1) := (f.right_inv y_1).symm
      _ = f.toFun (f.invFun y_2) := congrArg f.toFun hinv
      _ = y_2 := f.right_inv y_2
  * intro hT x_1 x_2 hx
    exact StrictIso.injective f (hT _ _ ((f.preserve_eq x_1 x_2).trans hx))

/-- Completeness transports along a strict isomorphism (Definition 5). -/
theorem complete_iff (f : StrictIso S T) : S.IsComplete.{v} <-> T.IsComplete.{v} := by
  constructor
  * intro hS ? a y hcomp
    have hcompS : forall i j, a i sqcap a j <= S.eq (f.invFun (y i)) (f.invFun (y j)) :=
      by
        intro i j
        have heq : T.eq (y i) (y j) = S.eq (f.invFun (y i)) (f.invFun (y j)) := by
          simpa [f.right_inv] using f.preserve_eq (f.invFun (y i)) (f.invFun (y j))
        exact (hcomp i j).trans_eq heq
    obtain <z, hz> := hS ? a (fun i => f.invFun (y i)) hcompS
    refine <f.toFun z, fun i => ?_>
    have heq : S.eq (f.invFun (y i)) z = T.eq (y i) (f.toFun z) := by
      simpa [f.right_inv] using (f.preserve_eq (f.invFun (y i)) z).symm
    exact (hz i).trans_eq heq
  * intro hT ? a x hcomp
    have hcompT : forall i j, a i sqcap a j <= T.eq (f.toFun (x i)) (f.toFun (x j)) := by
      intro i j
      exact (hcomp i j).trans_eq (f.preserve_eq (x i) (x j)).symm
    obtain <w, hw> := hT ? a (fun i => f.toFun (x i)) hcompT
    refine <f.invFun w, fun i => ?_>
    have heq : T.eq (f.toFun (x i)) w = S.eq (x i) (f.invFun w) := by
      have hpres := f.preserve_eq (x i) (f.invFun w)
      rwa [f.right_inv w] at hpres
    exact (hw i).trans_eq heq

end StrictIso

/-- Definition 5: a strict isomorphism transports totality, strictness, and
completeness in both directions. -/
theorem definition_5 {S : ASetoid (A := A) X} {T : ASetoid (A := A) Y}
(f : StrictIso S T) :
(S.IsTotal <-> T.IsTotal) /\ (S.IsStrict <-> T.IsStrict) /\
(S.IsComplete.{v} <-> T.IsComplete.{v}) :=

```

```

    <f.total_iff, f.strict_iff, f.complete_iff>

/-- Definition 6: product of `A`-setoids. -/
def prod : ASetoid (A := A) (X x Y) where
  eq := fun p q => S.eq p.1 q.1 sqcap T.eq p.2 q.2
  symm := fun p q => by
    rw [S.symm, T.symm, inf_comm]
  trans := fun p q r => by
    have hs := S.trans p.1 q.1 r.1
    have ht := T.trans p.2 q.2 r.2
    calc
      (S.eq p.1 q.1 sqcap T.eq p.2 q.2) sqcap (S.eq q.1 r.1 sqcap T.eq q.2 r.2)
      = (S.eq p.1 q.1 sqcap S.eq q.1 r.1) sqcap (T.eq p.2 q.2 sqcap T.eq q.2 r.2) :=
        inf_inf_inf_comm (S.eq p.1 q.1) (T.eq p.2 q.2) (S.eq q.1 r.1) (T.eq q.2 r.2)
      _ <= S.eq p.1 r.1 sqcap T.eq p.2 r.2 := inf_le_inf hs ht

@[simp] theorem prod_eq (p q : X x Y) :
  (S.prod T).eq p q = S.eq p.1 q.1 sqcap T.eq p.2 q.2 := rfl

/-- Definition 6: product equality is the infimum of the component equalities. -/
theorem definition_6 (p q : X x Y) :
  (S.prod T).eq p q = S.eq p.1 q.1 sqcap T.eq p.2 q.2 :=
  prod_eq S T p q

/-- Definition 7: a predicate on an `A`-setoid. -/
structure Predicate (S : ASetoid (A := A) X) where
  val : X -> A
  respects : forall x_1 x_2, S.eq x_1 x_2 <= himp (val x_1) (val x_2) sqcap himp (val x_2) (val x_1)
  le_eps : forall x, val x <= S.eps x

/-- A binary relation `X -> Y` is a predicate on the product (Definition 7). -/
abbrev Rel (S : ASetoid (A := A) X) (T : ASetoid (A := A) Y) :=
  Predicate (S.prod T)

/-- Definition 7: the two predicate axioms, unfolded. -/
theorem definition_7 (P : Predicate S) :
  (forall x_1 x_2, S.eq x_1 x_2 <= himp (P.val x_1) (P.val x_2) sqcap himp (P.val x_2) (P.val x_1)) /\
  (forall x, P.val x <= S.eps x) :=
  <P.respects, P.le_eps>

/-- Extensionality of `A`-valued equality in a predicate (Definition 7 (i)). -/
theorem Predicate.respects_left (P : Predicate S) (x_1 x_2 : X) :
  S.eq x_1 x_2 <= himp (P.val x_1) (P.val x_2) :=
  (le_inf_iff.mp (P.respects x_1 x_2)).1

end ASetoid

/-- Definition 11: an `A`-poset. Equality is recovered as the symmetrization of `<=`. -/
structure APoset (X : Type*) where
  le : X -> X -> A
  trans : forall x y z, le x y sqcap le y z <= le x z
  le_le_refl : forall x y, le x y <= le x x sqcap le y y

namespace APoset

variable {X Y : Type*} (P : APoset (A := A) X) (Q : APoset (A := A) Y)

/-- Equation (1): `?x = y? = ?x <= y? sqcap ?y <= x?`. -/
def eq (x y : X) : A := P.le x y sqcap P.le y x

/-- The underlying `A`-setoid of an `A`-poset (Definition 11). -/

```



```

def toASetoid : ASetoid (A := A) X where
  eq := P.eq
  symm := fun x y => by
    unfold APoset.eq
    rw [inf_comm]
  trans := fun x y z => by
    have hxy := P.trans x y z
    have hyx := P.trans z y x
    calc
      (P.le x y sqcap P.le y x) sqcap (P.le y z sqcap P.le z y)
      = (P.le x y sqcap P.le y z) sqcap (P.le y x sqcap P.le z y) :=
        inf_inf_inf_comm (P.le x y) (P.le y x) (P.le y z) (P.le z y)
      _ = (P.le x y sqcap P.le y z) sqcap (P.le z y sqcap P.le y x) := by
        rw [inf_comm (P.le y x)]
      _ <= P.le x z sqcap P.le z x := inf_le_inf hxy hyx

@[simp] theorem toASetoid_eq (x y : X) : P.toASetoid.eq x y = P.eq x y := rfl

/-- `A`-monotonicity of a function of underlying sets (Lemma 12). -/
def AMonotone (f : X -> Y) : Prop :=
  forall x_1 x_2, P.le x_1 x_2 <= Q.le (f x_1) (f x_2)

/-- Lemma 12, first sentence: an `A`-monotone map preserves `A`-valued equality. -/
theorem AMonotone.map_eq {f : X -> Y} (hf : AMonotone P Q f) (x_1 x_2 : X) :
  P.eq x_1 x_2 <= Q.eq (f x_1) (f x_2) :=
  inf_le_inf (hf x_1 x_2) (hf x_2 x_1)

/-- The hom-object `X ? Y` of Definition 9, as a predicate on functions. -/
def Functional (S : ASetoid (A := A) X) (T : ASetoid (A := A) Y) (f : X -> Y) : Prop :=
  forall x_1 x_2, S.eq x_1 x_2 <= T.eq (f x_1) (f x_2)

/-- Identity is functional (Definition 9). -/
theorem Functional.id {S : ASetoid (A := A) X} : Functional S S id :=
  fun _ _ => le_refl

/-- Composition of functional maps is functional (Definition 9). -/
theorem Functional.comp {Z : Type*} {S : ASetoid (A := A) X}
  {T : ASetoid (A := A) Y} {U : ASetoid (A := A) Z}
  {f : X -> Y} {g : Y -> Z} (hf : Functional S T f) (hg : Functional T U g) :
  Functional S U (g ∘ f) :=
  fun x_1 x_2 => (hf x_1 x_2).trans (hg (f x_1) (f x_2))

/-- Lemma 12: `A`-monotone maps are functional on the induced setoids. -/
theorem AMonotone.functional {f : X -> Y} (hf : AMonotone P Q f) :
  Functional P.toASetoid Q.toASetoid f :=
  fun x_1 x_2 => AMonotone.map_eq (P := P) (Q := Q) hf x_1 x_2

/-- Internal (A-valued) monotonicity: `forall x_1 x_2, ?x_1 <= x_2? => ?f(x_1) <= f(x_2)`
  has
Boolean value `top`. -/
def InternallyMonotone (P : APoset (A := A) X) (Q : APoset (A := A) Y) (f : X -> Y) :
  Prop :=
  (? x_1, ? x_2, himp (P.le x_1 x_2) (Q.le (f x_1) (f x_2))) = top

theorem internallyMonotone_iff_aMonotone {f : X -> Y} :
  InternallyMonotone P Q f <-> AMonotone P Q f := by
  constructor
  * intro h x_1 x_2
    unfold InternallyMonotone at h
    have hx_1 : (? x_2', himp (P.le x_1 x_2') (Q.le (f x_1) (f x_2')))) = top :=
      iInf_eq_top.mp h x_1
    exact himp_eq_top_iff.mp (iInf_eq_top.mp hx_1 x_2)
  * intro h

```

```

    unfold InternallyMonotone
    refine iInf_eq_top.mpr fun x_1 => iInf_eq_top.mpr fun x_2 => ?_
    exact himp_eq_top_iff.mpr (h x_1 x_2)

/-- Lemma 12, converse: an internally monotone `SetoidF_A` map is `A`-monotone. -/
theorem lemma_12_converse {f : X -> Y}
  (hf : Functional P.toASetoid Q.toASetoid f)
  (hmono : InternallyMonotone P Q f) : AMonotone P Q f :=
  let _ := hf
  (internallyMonotone_iff_aMonotone (P := P) (Q := Q)).mp hmono

/-- Strict isomorphism of `A`-posets: a bijection strictly preserving `<=`. -/
structure StrictIso (P : APoset (A := A) X) (Q : APoset (A := A) Y) where
  toFun : X -> Y
  invFun : Y -> X
  left_inv : forall x, invFun (toFun x) = x
  right_inv : forall y, toFun (invFun y) = y
  preserve_le : forall x_1 x_2, Q.le (toFun x_1) (toFun x_2) = P.le x_1 x_2

namespace StrictIso

variable {P : APoset (A := A) X} {Q : APoset (A := A) Y}

theorem preserve_eq (f : StrictIso P Q) (x_1 x_2 : X) :
  Q.eq (f.toFun x_1) (f.toFun x_2) = P.eq x_1 x_2 := by
  unfold APoset.eq

Lean 4 source (lines 401–449)

    rw [f.preserve_le x_1 x_2, f.preserve_le x_2 x_1]

/-- The underlying setoid isomorphism (Definition 5). -/
def toSetoidIso (f : StrictIso P Q) :
  ASetoid.StrictIso P.toASetoid Q.toASetoid where
  toFun := f.toFun
  invFun := f.invFun
  left_inv := f.left_inv
  right_inv := f.right_inv
  preserve_eq := f.preserve_eq

theorem injective (f : StrictIso P Q) : Function.Injective f.toFun :=
  Function.LeftInverse.injective f.left_inv

theorem surjective (f : StrictIso P Q) : Function.Surjective f.toFun :=
  Function.RightInverse.surjective f.right_inv

end StrictIso

end APoset

/-- Definition 5 (paper name): strict isomorphisms transport totality, strictness,
and completeness both ways. -/
theorem definition_5 {X Y : Type*} {S : ASetoid (A := A) X} {T : ASetoid (A := A) Y}
  (f : ASetoid.StrictIso S T) :
  (S.IsTotal <=> T.IsTotal) /\ (S.IsStrict <=> T.IsStrict) /\
  (S.IsComplete.{v} <=> T.IsComplete.{v}) :=
  ASetoid.definition_5 f

/-- Definition 6 (paper name): product equality is the infimum of components. -/
theorem definition_6 {X Y : Type*} (S : ASetoid (A := A) X) (T : ASetoid (A := A) Y)
  (p q : X x Y) :
  (S.prod T).eq p q = S.eq p.1 q.1 sqcap T.eq p.2 q.2 :=
  ASetoid.definition_6 S T p q

```

```

/-- Definition 7 (paper name): the two predicate axioms. -/
theorem definition_7 {X : Type*} {S : ASetoid (A := A) X} (P : ASetoid.Predicate S) :
  (forall x_1 x_2, S.eq x_1 x_2 <= himp (P.val x_1) (P.val x_2) sqcap himp (P.val x_2) (
    P.val x_1)) /\
  (forall x, P.val x <= S.eps x) :=
  ASetoid.definition_7 S P

/-- Lemma 12 converse (paper name): internally monotone functional maps are
`A`-monotone. -/
theorem lemma_12_converse {X Y : Type*} (P : APoset (A := A) X) (Q : APoset (A := A) Y)
  {f : X -> Y} (hf : APoset.Functional P.toASetoid Q.toASetoid f)
  (hmono : APoset.InternallyMonotone P Q f) : APoset.AMonotone P Q f :=
  APoset.lemma_12_converse (P := P) (Q := Q) hf hmono

end Scott2026

```

A.4 Scott2026/RelFun.lean

546 lines.

Lean 4 source (lines 1–400)

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/

import Scott2026.Setoid

/-!
# Relational and functional maps of `A`-setoids (Definitions 8-10, 13)
-/

namespace Scott2026

variable {A : Type*} [CompleteBooleanAlgebra A] {X Y : Type*}

/-- Definition 8: a relation that is single-valued and total in the `A`-valued sense. -/
structure RelFun (S : ASetoid (A := A) X) (T : ASetoid (A := A) Y) where
  val : X -> Y -> A
  respects : forall x_1 x_2 y_1 y_2,
    S.eq x_1 x_2 sqcap T.eq y_1 y_2 <=
      himp (val x_1 y_1) (val x_2 y_2) sqcap himp (val x_2 y_2) (val x_1 y_1)
  le_eps : forall x y, val x y <= S.eps x sqcap T.eps y
  single_valued : forall x y_1 y_2, val x y_1 sqcap val x y_2 <= T.eq y_1 y_2
  total : forall x, S.eps x <= bigcup y, val x y

namespace RelFun

variable {S : ASetoid (A := A) X} {T : ASetoid (A := A) Y}

/-- Definition 8 (i): substitution of equals on the source. -/
theorem subst_left (f : RelFun S T) (x_1 x_2 : X) (y : Y) :
  S.eq x_1 x_2 sqcap f.val x_1 y <= f.val x_2 y := by
  have hy : f.val x_1 y <= T.eq y y := (f.le_eps x_1 y).trans inf_le_right
  have hmp : S.eq x_1 x_2 sqcap T.eq y y sqcap f.val x_1 y <= f.val x_2 y :=
    le_himp_iff.mp (le_inf_iff.mp (f.respects x_1 x_2 y y)).1
  exact hmp.trans' (le_inf (le_inf inf_le_left (inf_le_right.trans hy)) inf_le_right)

/-- Definition 8 (i): substitution of equals on the target. -/
theorem subst_right (f : RelFun S T) (x : X) (y_1 y_2 : Y) :
  T.eq y_1 y_2 sqcap f.val x y_1 <= f.val x y_2 := by

```

```

have hx : f.val x y_1 <= S.eq x x := (f.le_eps x y_1).trans inf_le_left
have hmp : S.eq x x sqcap T.eq y_1 y_2 sqcap f.val x y_1 <= f.val x y_2 :=
  le_himp_iff.mp (le_inf_iff.mp (f.respects x x y_1 y_2)).1
exact hmp.trans' (le_inf (le_inf (inf_le_right.trans hx) inf_le_left) inf_le_right)

@[ext]
theorem ext {f g : RelFun S T} (h : forall x y, f.val x y = g.val x y) : f = g := by
  cases f
  cases g
  simp only [RelFun.mk.injEq]
  exact funext fun x => funext (h x)

end RelFun

variable {Z : Type*}

/-- Definition 8: composition value, `(g comp f)(x, z) = bigcup_y f(x,y) sqcap g(y,z)`. -/
def relCompVal {S : ASetoid (A := A) X} {T : ASetoid (A := A) Y} {U : ASetoid (A := A) Z}
  (g : RelFun T U) (f : RelFun S T) (x : X) (z : Z) : A :=
  bigcup y : Y, f.val x y sqcap g.val y z

/-- Definition 8: composition in `SetoidR_A`. -/
def RelFun.comp {S : ASetoid (A := A) X} {T : ASetoid (A := A) Y} {U : ASetoid (A := A) Z}
  (g : RelFun T U) (f : RelFun S T) : RelFun S U where
  val := relCompVal g f
  respects := fun x_1 x_2 z_1 z_2 => by
    have key : forall (u_1 u_2 : X) (w_1 w_2 : Z),
      S.eq u_1 u_2 sqcap U.eq w_1 w_2 sqcap relCompVal g f u_1 w_1 <= relCompVal g f
        u_2 w_2 := by
      intro u_1 u_2 w_1 w_2
      unfold relCompVal
      rw [inf_iSup_eq]
      refine iSup_le fun y => le_iSup_of_le y (le_inf ?_ ?_)
      * exact (f.subst_left u_1 u_2 y).trans'
        (le_inf (inf_le_of_left_le inf_le_left) (inf_le_of_right_le inf_le_left))
      * exact (g.subst_right y w_1 w_2).trans'
        (le_inf (inf_le_of_left_le inf_le_right) (inf_le_of_right_le inf_le_right))
      refine le_inf ?_ ?_ <=> rw [le_himp_iff]
      * exact key x_1 x_2 z_1 z_2
      * have h := key x_2 x_1 z_2 z_1
        rwa [S.symm x_2 x_1, U.symm z_2 z_1] at h
    le_eps := fun x z => by
      refine iSup_le fun y => le_inf ?_ ?_
      * exact inf_le_of_left_le ((f.le_eps x y).trans inf_le_left)
      * exact inf_le_of_right_le ((g.le_eps y z).trans inf_le_right)
    single_valued := fun x z_1 z_2 => by
      unfold relCompVal
      rw [iSup_inf_eq]
      refine iSup_le fun y_1 => ?_
      rw [inf_iSup_eq]
      refine iSup_le fun y_2 => ?_
      have hy : f.val x y_1 sqcap f.val x y_2 <= T.eq y_1 y_2 := f.single_valued x y_1 y_2
      have hg2 : T.eq y_1 y_2 sqcap g.val y_2 z_2 <= g.val y_1 z_2 := by
        have h := g.subst_left y_2 y_1 z_2
        rwa [T.symm y_2 y_1] at h
      refine (g.single_valued y_1 z_1 z_2).trans' (le_inf (inf_le_of_left_le inf_le_right) ?_)
      refine hg2.trans' (le_inf ?_ (inf_le_of_right_le inf_le_right))
      exact hy.trans' (le_inf (inf_le_of_left_le inf_le_left) (inf_le_of_right_le inf_le_left))
    total := fun x => by
      refine (f.total x).trans (iSup_le fun y => ?_)
      have hy : f.val x y <= T.eps y := (f.le_eps x y).trans inf_le_right
      have hstep : f.val x y <= f.val x y sqcap bigcup z, g.val y z :=

```

```

    le_inf le_rfl (hy.trans (g.total y))
  refine hstep.trans ?_
  rw [inf_iSup_eq]
  refine iSup_le fun z => le_iSup_of_le z ?_
  exact le_iSup (fun y' : Y => f.val x y' sqcap g.val y' z) y

@[simp] theorem RelFun.comp_val {S : ASetoid (A := A) X} {T : ASetoid (A := A) Y}
  {U : ASetoid (A := A) Z} (g : RelFun T U) (f : RelFun S T) (x : X) (z : Z) :
  (g.comp f).val x z = bigcup y : Y, f.val x y sqcap g.val y z := rfl

/-- Definition 10: graph of a functional map, `(f)(x,y) = ?(x) sqcap ?f(x) = y?`. -/
def gamma (S : ASetoid (A := A) X) (T : ASetoid (A := A) Y) (f : X -> Y) (x : X) (y : Y) : A
:=
  S.eps x sqcap T.eq (f x) y

/-- Definition 9: `X ? Y` is the set of equality-preserving maps. -/
def functionalMaps (S : ASetoid (A := A) X) (T : ASetoid (A := A) Y) : Set (X -> Y) :=
  {f | APoset.Functional S T f}

/-- Definition 9: `A`-valued equality of functional maps. -/
def functionalEq (S : ASetoid (A := A) X) (T : ASetoid (A := A) Y) (f_1 f_2 : X -> Y) : A :=
  ? x, himp (S.eps x) (T.eq (f_1 x) (f_2 x))

/-- Definition 9: the generating relation of the `SetoidF_A` hom-quotient,
`f_1 ~ f_2` iff `forall x, ?(x) <= ?f_1(x) = f_2(x)?`. -/
def FunctionalEquiv (S : ASetoid (A := A) X) (T : ASetoid (A := A) Y)
  (f_1 f_2 : X -> Y) : Prop :=
  forall x, S.eps x <= T.eq (f_1 x) (f_2 x)

theorem functionalEq_eq_top_iff {S : ASetoid (A := A) X} {T : ASetoid (A := A) Y}
  (f_1 f_2 : X -> Y) :
  functionalEq S T f_1 f_2 = top <-> FunctionalEquiv S T f_1 f_2 := by
  unfold functionalEq FunctionalEquiv
  rw [iInf_eq_top]
  exact forall_congr' fun _ => himp_eq_top_iff

/-- Definition 8: identity relational function `id(x,y) = ?x = y?`. -/
def RelFun.id (S : ASetoid (A := A) X) : RelFun S S where
  val := S.eq
  respects := fun x_1 x_2 y_1 y_2 => by
    refine le_inf ?fwd ?bwd
    * rw [le_himp_iff]
    calc
      S.eq x_1 x_2 sqcap S.eq y_1 y_2 sqcap S.eq x_1 y_1
      = S.eq x_2 x_1 sqcap S.eq y_1 y_2 sqcap S.eq x_1 y_1 := by rw [S.symm x_1 x_2]
      _ = S.eq x_2 x_1 sqcap (S.eq y_1 y_2 sqcap S.eq x_1 y_1) := inf_assoc _ _ _
      _ = S.eq x_2 x_1 sqcap (S.eq x_1 y_1 sqcap S.eq y_1 y_2) := by rw [inf_comm (S.eq
y_1 y_2)]
      _ = (S.eq x_2 x_1 sqcap S.eq x_1 y_1) sqcap S.eq y_1 y_2 := (inf_assoc _ _ _).symm
      _ <= S.eq x_2 y_1 sqcap S.eq y_1 y_2 := inf_le_inf (S.trans x_2 x_1 y_1) le_rfl
      _ <= S.eq x_2 y_2 := S.trans x_2 y_1 y_2
    * rw [le_himp_iff]
    calc
      S.eq x_1 x_2 sqcap S.eq y_1 y_2 sqcap S.eq x_2 y_2
      = S.eq x_1 x_2 sqcap (S.eq y_1 y_2 sqcap S.eq x_2 y_2) := inf_assoc _ _ _
      _ = S.eq x_1 x_2 sqcap (S.eq y_2 y_1 sqcap S.eq x_2 y_2) := by rw [S.symm y_1 y_2]
      _ = S.eq x_1 x_2 sqcap (S.eq x_2 y_2 sqcap S.eq y_2 y_1) := by
        rw [inf_comm (S.eq y_2 y_1), S.symm x_2 y_2]
      _ = (S.eq x_1 x_2 sqcap S.eq x_2 y_2) sqcap S.eq y_2 y_1 := (inf_assoc _ _ _).symm
      _ <= S.eq x_1 y_2 sqcap S.eq y_2 y_1 := inf_le_inf (S.trans x_1 x_2 y_2) le_rfl
      _ <= S.eq x_1 y_1 := S.trans x_1 y_2 y_1
  le_eps := fun x y => le_inf (S.eq_le_eps_left x y) (S.eq_le_eps_right x y)
  single_valued := fun x y_1 y_2 => by

```

```

calc
  S.eq x y_1 sqcap S.eq x y_2 = S.eq y_1 x sqcap S.eq x y_2 := by rw [S.symm x y_1]
  _ <= S.eq y_1 y_2 := S.trans y_1 x y_2
total := fun x => le_trans (le_rfl : S.eps x <= S.eq x x) (le_iSup (S.eq x) x)

/-- Left unit: `id_T comp f = f`. -/
theorem RelFun.id_comp {S : ASetoid (A := A) X} {T : ASetoid (A := A) Y}
  (f : RelFun S T) : (RelFun.id T).comp f = f := by
  refine RelFun.ext fun x z => ?_
  change (bigcup y : Y, f.val x y sqcap T.eq y z) = f.val x z
  refine le_antisymm ?le ?ge
  * refine iSup_le fun y => ?_
    rw [inf_comm]
    exact f.subst_right x y z
  * have : f.val x z <= f.val x z sqcap T.eq z z :=
    le_inf le_rfl ((f.le_eps x z).trans inf_le_right)
    exact this.trans (le_iSup (fun y => f.val x y sqcap T.eq y z) z)

/-- Right unit: `f comp id_S = f`. -/
theorem RelFun.comp_id {S : ASetoid (A := A) X} {T : ASetoid (A := A) Y}
  (f : RelFun S T) : f.comp (RelFun.id S) = f := by
  refine RelFun.ext fun x z => ?_
  change (bigcup y : X, S.eq x y sqcap f.val y z) = f.val x z
  refine le_antisymm ?le ?ge
  * refine iSup_le fun y => ?_
    have h := f.subst_left y x z
    rwa [S.symm y x] at h
  * have : f.val x z <= S.eq x x sqcap f.val x z :=
    le_inf ((f.le_eps x z).trans inf_le_left) le_rfl
    exact this.trans (le_iSup (fun y => S.eq x y sqcap f.val y z) x)

/-- Associativity of relational composition. -/
theorem RelFun.comp_assoc {V : Type*}
  {S : ASetoid (A := A) X} {T : ASetoid (A := A) Y}
  {U : ASetoid (A := A) Z} {R : ASetoid (A := A) V}
  (h : RelFun U R) (g : RelFun T U) (f : RelFun S T) :
  (h.comp g).comp f = h.comp (g.comp f) := by
  refine RelFun.ext fun x z => ?_
  simp only [RelFun.comp_val]
  calc bigcup y, f.val x y sqcap bigcup w, g.val y w sqcap h.val w z
    = bigcup y, bigcup w, f.val x y sqcap (g.val y w sqcap h.val w z) := by
    refine iSup_congr fun y => inf_iSup_eq (f.val x y) _
  _ = bigcup y, bigcup w, (f.val x y sqcap g.val y w) sqcap h.val w z := by
    refine iSup_congr fun y => iSup_congr fun w => (inf_assoc _ _ _).symm
  _ = bigcup w, bigcup y, (f.val x y sqcap g.val y w) sqcap h.val w z := iSup_comm
  _ = bigcup w, (bigcup y, f.val x y sqcap g.val y w) sqcap h.val w z := by
    refine iSup_congr fun w =>
      Eq.symm (iSup_inf_eq (fun y => f.val x y sqcap g.val y w) (h.val w z))

/-- Definition 8: identity and composition data, plus category laws. -/
theorem definition_8 {V : Type*}
  {S : ASetoid (A := A) X} {T : ASetoid (A := A) Y}
  {U : ASetoid (A := A) Z} {R : ASetoid (A := A) V}
  (f : RelFun S T) (g : RelFun T U) (h : RelFun U R)
  (x_1 x_2 : X) (x : X) (z : Z) :
  (RelFun.id S).val x_1 x_2 = S.eq x_1 x_2 /\
  (g.comp f).val x z = bigcup y : Y, f.val x y sqcap g.val y z /\
  (RelFun.id T).comp f = f /\
  f.comp (RelFun.id S) = f /\
  (h.comp g).comp f = h.comp (g.comp f) :=
  <rfl, RelFun.comp_val g f x z, RelFun.id_comp f, RelFun.comp_id f,
  RelFun.comp_assoc h g f>

```

```

/-- A functional map satisfies  $\gamma(x) \leq \gamma(f(x))$ . -/
theorem functional_eps_le {S : ASetoid (A := A) X} {T : ASetoid (A := A) Y}
  {f : X → Y} (hf : APoset.Functional S T f) (x : X) :
  S.eps x ≤ T.eps (f x) :=
  hf x x

/-- Definition 10: the graph of a functional map is a relational function. -/
def RelFun.ofFunctional (S : ASetoid (A := A) X) (T : ASetoid (A := A) Y)
  (f : X → Y) (hf : APoset.Functional S T f) : RelFun S T where
  val := gamma S T f
  respects := fun x_1 x_2 y_1 y_2 => by
    unfold gamma
    refine le_inf ?fwd ?bwd
    * rw [le_himp_iff]
    refine le_inf ?eps_1 ?eq_1
    * exact (S.eq_le_eps_right x_1 x_2).trans' (inf_le_left.trans inf_le_left)
    * have h_1 : S.eq x_1 x_2 sqcap T.eq (f x_1) y_1 ≤ T.eq (f x_2) y_1 := by
      have step : T.eq (f x_2) (f x_1) sqcap T.eq (f x_1) y_1 ≤ T.eq (f x_2) y_1 :=
        T.trans (f x_2) (f x_1) y_1
      have hsymm : S.eq x_1 x_2 ≤ T.eq (f x_2) (f x_1) := by
        rw [T.symm]; exact hf x_1 x_2
      exact (inf_le_inf hsymm le_rfl).trans step
    have : S.eq x_1 x_2 sqcap T.eq y_1 y_2 sqcap (S.eps x_1 sqcap T.eq (f x_1) y_1)
      ≤ T.eq (f x_2) y_2 := by
      calc
        S.eq x_1 x_2 sqcap T.eq y_1 y_2 sqcap (S.eps x_1 sqcap T.eq (f x_1) y_1)
          ≤ S.eq x_1 x_2 sqcap T.eq y_1 y_2 sqcap T.eq (f x_1) y_1 :=
            inf_le_inf le_rfl inf_le_right
        _ = (S.eq x_1 x_2 sqcap T.eq (f x_1) y_1) sqcap T.eq y_1 y_2 := by
          rw [inf_right_comm, inf_assoc]
        _ ≤ T.eq (f x_2) y_1 sqcap T.eq y_1 y_2 := inf_le_inf h_1 le_rfl
        _ ≤ T.eq (f x_2) y_2 := T.trans (f x_2) y_1 y_2
    exact this
    * rw [le_himp_iff]
    refine le_inf ?eps_2 ?eq_2
    * exact (S.eq_le_eps_left x_1 x_2).trans' (inf_le_left.trans inf_le_left)
    * have h_1 : S.eq x_1 x_2 sqcap T.eq (f x_2) y_2 ≤ T.eq (f x_1) y_2 := by
      have step : T.eq (f x_1) (f x_2) sqcap T.eq (f x_2) y_2 ≤ T.eq (f x_1) y_2 :=
        T.trans (f x_1) (f x_2) y_2
      exact (inf_le_inf (hf x_1 x_2) le_rfl).trans step
    calc
      S.eq x_1 x_2 sqcap T.eq y_1 y_2 sqcap (S.eps x_2 sqcap T.eq (f x_2) y_2)
        ≤ S.eq x_1 x_2 sqcap T.eq y_1 y_2 sqcap T.eq (f x_2) y_2 :=
          inf_le_inf le_rfl inf_le_right
      _ = (S.eq x_1 x_2 sqcap T.eq (f x_2) y_2) sqcap T.eq y_1 y_2 := by
        rw [inf_right_comm, inf_assoc]
      _ ≤ T.eq (f x_1) y_2 sqcap T.eq y_1 y_2 := inf_le_inf h_1 le_rfl
      _ ≤ T.eq (f x_1) y_1 := by
        have step : T.eq (f x_1) y_2 sqcap T.eq y_2 y_1 ≤ T.eq (f x_1) y_1 :=
          T.trans (f x_1) y_2 y_1
        rw [T.symm y_1 y_2]; exact step
  le_eps := fun x y => by
    unfold gamma
    exact le_inf inf_le_left ((T.eq_le_eps_right (f x) y).trans' inf_le_right)
  single_valued := fun x y_1 y_2 => by
    unfold gamma
    calc
      (S.eps x sqcap T.eq (f x) y_1) sqcap (S.eps x sqcap T.eq (f x) y_2)
        ≤ T.eq (f x) y_1 sqcap T.eq (f x) y_2 := inf_le_inf inf_le_right inf_le_right
      _ = T.eq y_1 (f x) sqcap T.eq (f x) y_2 := by rw [T.symm (f x) y_1]
      _ ≤ T.eq y_1 y_2 := T.trans y_1 (f x) y_2
  total := fun x => by
    unfold gamma

```

```

have h? : S.eps x <= T.eps (f x) := functional_eps_le hf x
have : S.eps x <= S.eps x sqcap T.eq (f x) (f x) :=
  le_inf le_rfl (by simp [ASetoid.eps] using h?)
exact this.trans (le_iSup (fun y => S.eps x sqcap T.eq (f x) y) (f x))

/-- Definition 9: `~` is an equivalence on functional maps. -/
def functionalSetoid (S : ASetoid (A := A) X) (T : ASetoid (A := A) Y) :
  Setoid {f : X -> Y // APoset.Functional S T f} where
  r f g := FunctionalEquiv S T f.1 g.1
  iseqv := {
    refl := fun f x => functional_eps_le f.2 x
    symm := fun {f g} h x => (h x).trans_eq (T.symm (f.1 x) (g.1 x))
    trans := fun {f g h} hfg hgh x =>
      (le_inf (hfg x) (hgh x)).trans (T.trans (f.1 x) (g.1 x) (h.1 x))
  }

/-- Definition 9: `SetoidF_A(X,Y)` is the quotient of `X ? Y` by `~`. -/
def SetoidFHom (S : ASetoid (A := A) X) (T : ASetoid (A := A) Y) : Type _ :=
  Quotient (functionalSetoid S T)

namespace SetoidFHom

/-- Identity morphism of `SetoidF_A`. -/
def id (S : ASetoid (A := A) X) : SetoidFHom S S :=
  Quotient.mk (functionalSetoid S S) <_root_.id, APoset.Functional.id>

/-- Composition is well-defined on the hom-quotient (Definition 9). -/
theorem comp_respects_equiv {Z : Type*}
  {S : ASetoid (A := A) X} {T : ASetoid (A := A) Y} {U : ASetoid (A := A) Z}
  {f_1 f_2 : X -> Y} {g_1 g_2 : Y -> Z}
  (hf_1 : APoset.Functional S T f_1) (_hf_2 : APoset.Functional S T f_2)
  (_hg_1 : APoset.Functional T U g_1) (hg_2 : APoset.Functional T U g_2)
  (hf : FunctionalEquiv S T f_1 f_2) (hg : FunctionalEquiv T U g_1 g_2) :
  FunctionalEquiv S U (g_1 comp f_1) (g_2 comp f_2) := by
  intro x
  have hfg : S.eps x <= T.eq (f_1 x) (f_2 x) := hf x
  have hg1 : S.eps x <= U.eq (g_1 (f_1 x)) (g_2 (f_1 x)) :=
    (functional_eps_le hf_1 x).trans (hg (f_1 x))
  have hg2 : S.eps x <= U.eq (g_2 (f_1 x)) (g_2 (f_2 x)) :=
    hfg.trans (hg_2 (f_1 x) (f_2 x))
  exact (le_inf hg1 hg2).trans (U.trans _ _ _)

/-- Composition of `SetoidF_A` morphisms. -/
def comp {Z : Type*} {S : ASetoid (A := A) X} {T : ASetoid (A := A) Y}
  {U : ASetoid (A := A) Z} (g : SetoidFHom T U) (f : SetoidFHom S T) :
  SetoidFHom S U :=
  Quotient.liftOn_2 g f
  (fun g f =>
    Quotient.mk (functionalSetoid S U)
      <g.1 comp f.1, APoset.Functional.comp f.2 g.2>)
  (fun g_1 f_1 g_2 f_2 hg hf =>
    Quotient.sound
      (@comp_respects_equiv A _ X Y Z S T U f_1.1 f_2.1 g_1.1 g_2.1
        f_1.2 f_2.2 g_1.2 g_2.2 hf hg))

end SetoidFHom

/-- Definition 9: hom-object is the quotient, and id/comp are well-defined. -/
theorem definition_9 {Z : Type*}
  (S : ASetoid (A := A) X) (T : ASetoid (A := A) Y) (U : ASetoid (A := A) Z) :
  FunctionalEquiv S S id id /\
  APoset.Functional S S id /\
  (forall {f_1 f_2 : X -> Y} {g_1 g_2 : Y -> Z},

```



```

      APoset.Functional S T f_1 -> APoset.Functional S T f_2 ->
      APoset.Functional T U g_1 -> APoset.Functional T U g_2 ->
      FunctionalEquiv S T f_1 f_2 -> FunctionalEquiv T U g_1 g_2 ->
      FunctionalEquiv S U (g_1 comp f_1) (g_2 comp f_2)) :=
    <fun _ => le_refl, APoset.Functional.id, SetoidFHom.comp_respects_equiv>

/-- Definition 10: `?` is well-defined on `~`. -/
theorem gamma_equiv {S : ASetoid (A := A) X} {T : ASetoid (A := A) Y}
  {f g : X -> Y} (h : FunctionalEquiv S T f g) (x : X) (y : Y) :
  gamma S T f x y = gamma S T g x y := by
  unfold gamma
  refine le_antisymm ?le ?ge
  * have : S.eps x sqcap T.eq (f x) y <= T.eq (g x) y :=
    (inf_le_inf ((h x).trans_eq (T.symm (f x) (g x))) (le_refl _)).trans
    (T.trans (g x) (f x) y)
    exact le_inf inf_le_left this
  * have : S.eps x sqcap T.eq (g x) y <= T.eq (f x) y :=
    (inf_le_inf (h x) (le_refl _)).trans (T.trans (f x) (g x) y)
    exact le_inf inf_le_left this

/-- Definition 10: `?` preserves identities. -/
theorem gamma_id (S : ASetoid (A := A) X) (x y : X) :
  gamma S S id x y = (RelFun.id S).val x y := by
  unfold gamma RelFun.id
  exact inf_eq_right.mpr (S.eq_le_eps_left x y)

/-- Definition 10: `?` preserves composition. -/
theorem gamma_comp {Z : Type*}
  {S : ASetoid (A := A) X} {T : ASetoid (A := A) Y} {U : ASetoid (A := A) Z}
  {f : X -> Y} {g : Y -> Z}
  (hf : APoset.Functional S T f) (hg : APoset.Functional T U g)
  (x : X) (z : Z) :
  gamma S U (g comp f) x z =
    relCompVal (RelFun.ofFunctional T U g hg) (RelFun.ofFunctional S T f hf) x z := by
  unfold gamma relCompVal RelFun.ofFunctional
  refine le_antisymm ?le ?ge
  * have h? : S.eps x <= T.eps (f x) := functional_eps_le hf x
    have : S.eps x sqcap U.eq (g (f x)) z <=
      S.eps x sqcap T.eq (f x) (f x) sqcap (T.eps (f x) sqcap U.eq (g (f x)) z) :=
      le_inf (le_inf inf_le_left (inf_le_left.trans h?))
        (le_inf (inf_le_left.trans h?) inf_le_right)
    exact this.trans (le_iSup (fun y =>
      (S.eps x sqcap T.eq (f x) y) sqcap (T.eps y sqcap U.eq (g y) z)) (f x))
  * refine iSup_le fun y => ?_
    have hmap : T.eq (f x) y <= U.eq (g (f x)) (g y) := hg (f x) y
    have : S.eps x sqcap T.eq (f x) y sqcap (T.eps y sqcap U.eq (g y) z) <=
      S.eps x sqcap U.eq (g (f x)) z :=
      le_inf (inf_le_of_left_le inf_le_left)

    ((le_inf (inf_le_of_left_le inf_le_right) (inf_le_of_right_le inf_le_right)).trans
      ((le_inf (inf_le_left.trans hmap) inf_le_right).trans
        (U.trans (g (f x)) (g y) z)))
    exact this

/-- Definition 10: `?` is faithful on representatives. -/
theorem gamma_faithful {S : ASetoid (A := A) X} {T : ASetoid (A := A) Y}
  {f g : X -> Y} (hf : APoset.Functional S T f) (hg : APoset.Functional S T g)
  (h : RelFun.ofFunctional S T f hf = RelFun.ofFunctional S T g hg) :
  FunctionalEquiv S T f g := by
  intro x
  have hval : gamma S T f x (f x) = gamma S T g x (f x) := by
    simp [RelFun.ofFunctional] using

```

Lean 4 source (lines 401–546)

```

    congrArg (fun r : RelFun S T => r.val x (f x)) h
  have hfx : gamma S T f x (f x) = S.eps x :=
    inf_eq_left.mpr (functional_eps_le hf x)
  have : S.eps x = S.eps x sqcap T.eq (g x) (f x) := by
    calc S.eps x = gamma S T f x (f x) := hfx.symm
      _ = gamma S T g x (f x) := hval
      _ = S.eps x sqcap T.eq (g x) (f x) := rfl
  exact ((le_inf_iff.mp this.le).2).trans_eq (T.symm (g x) (f x))

/-- Definition 10: `?` is a faithful functor `SetoidF_A -> SetoidR_A`. -/
theorem definition_10 {Z : Type*}
  {S : ASetoid (A := A) X} {T : ASetoid (A := A) Y} {U : ASetoid (A := A) Z}
  {f : X -> Y} {g : Y -> Z}
  (hf : APoset.Functional S T f) (hg : APoset.Functional T U g)
  {f' : X -> Y} (hf' : APoset.Functional S T f')
  (hequiv : FunctionalEquiv S T f f')
  (hgraph : RelFun.ofFunctional S T f hf = RelFun.ofFunctional S T f' hf')
  (x : X) (y : Y) (z : Z) :
  gamma S T f x y = gamma S T f' x y /\
  gamma S S id x x = (RelFun.id S).val x x /\
  gamma S U (g comp f) x z =
    relCompVal (RelFun.ofFunctional T U g hg)
      (RelFun.ofFunctional S T f hf) x z /\
  FunctionalEquiv S T f f' :=
  <gamma_equiv hequiv x y, gamma_id S x x, gamma_comp hf hg x z,
  gamma_faithful hf hf' hgraph>

/-!
## Definition 13: realizing a relational function on a complete codomain
-/

variable {S : ASetoid (A := A) X} {T : ASetoid (A := A) Y}

/-- The family `y |-> f(x,y)` is compatible by single-valuedness. -/
theorem RelFun.val_compatible (f : RelFun S T) (x : X) (y_1 y_2 : Y) :
  f.val x y_1 sqcap f.val x y_2 <= T.eq y_1 y_2 :=
  f.single_valued x y_1 y_2

/-- Definition 13: choose `F(f)(x)` by mixing `f(x, -)` in a complete codomain. -/
noncomputable def functionalOfRel (hT : T.IsComplete) (f : RelFun S T) : X -> Y :=
  fun x =>
    Classical.choose (hT Y (fun y => f.val x y) id (f.val_compatible x))

theorem functionalOfRel_le (hT : T.IsComplete) (f : RelFun S T) (x : X) (y : Y) :
  f.val x y <= T.eq y (functionalOfRel hT f x) :=
  Classical.choose_spec (hT Y (fun y => f.val x y) id (f.val_compatible x)) y

/-- Definition 13: `F(f)` preserves `A`-valued equality. -/
theorem functionalOfRel_functional (hT : T.IsComplete) (f : RelFun S T) :
  APoset.Functional S T (functionalOfRel hT f) := by
  intro x_1 x_2
  have hx : S.eq x_1 x_2 <= bigcup y, f.val x_1 y :=
    (S.eq_le_eps_left x_1 x_2).trans (f.total x_1)
  refine (le_inf (le_refl (S.eq x_1 x_2)) hx).trans ?_
  rw [inf_iSup_eq]
  refine iSup_le fun y => ?_
  have h_1 : S.eq x_1 x_2 sqcap f.val x_1 y <= T.eq y (functionalOfRel hT f x_1) :=
    inf_le_right.trans (functionalOfRel_le hT f x_1 y)
  have h_2 : S.eq x_1 x_2 sqcap f.val x_1 y <= T.eq y (functionalOfRel hT f x_2) :=
    (f.subst_left x_1 x_2 y).trans (functionalOfRel_le hT f x_2 y)
  have : S.eq x_1 x_2 sqcap f.val x_1 y <=
    T.eq (functionalOfRel hT f x_1) y sqcap T.eq y (functionalOfRel hT f x_2) :=
    le_inf (by rw [T.symm]; exact h_1) h_2

```

```

exact this.trans (T.trans _ _ _)

/-- Definition 13:  $\gamma(F(f)) = f$ . -/
theorem functionalOfRel_gamma (hT : T.IsComplete) (f : RelFun S T) (x : X) (y : Y) :
  gamma S T (functionalOfRel hT f) x y = f.val x y := by
  unfold gamma
  refine le_antisymm ?le ?ge
  * have htot : S.eps x <= bigcup y', f.val x y' := f.total x
    refine (inf_le_inf htot (le_refl (T.eq (functionalOfRel hT f x) y))).trans ?_
    rw [iSup_inf_eq]
    refine iSup_le fun y' => ?_
    have hy' : f.val x y' <= T.eq y' (functionalOfRel hT f x) :=
      functionalOfRel_le hT f x y'
    have heq : f.val x y' sqcap T.eq (functionalOfRel hT f x) y <= T.eq y' y :=
      (le_inf (inf_le_left.trans hy') inf_le_right).trans
      (T.trans y' (functionalOfRel hT f x) y)
    exact (f.subst_right x y' y).trans' (le_inf heq inf_le_left)
  * exact le_inf ((f.le_eps x y).trans inf_le_left)
    (by rw [T.symm]; exact functionalOfRel_le hT f x y)

/-- Definition 13, inverse step:  $\gamma(\gamma(f)) \sim f$ . -/
theorem functionalOfRel_ofFunctional (hT : T.IsComplete)
  (f : X -> Y) (hf : APoset.Functional S T f) (x : X) :
  S.eps x <= T.eq (functionalOfRel hT (RelFun.ofFunctional S T f hf) x) (f x) := by
  have heq := functionalOfRel_gamma hT (RelFun.ofFunctional S T f hf) x (f x)
  change S.eps x sqcap T.eq (functionalOfRel hT (RelFun.ofFunctional S T f hf) x) (f x) =
    S.eps x sqcap T.eq (f x) (f x) at heq
  have hR : S.eps x sqcap T.eq (f x) (f x) = S.eps x :=
    inf_eq_left.mpr (functional_eps_le hf x)
  rw [hR] at heq
  exact (le_inf_iff.mp heq.ge).2

/--  $\gamma$  as a map on the  $\text{SetoidF}_A$  hom-quotient. -/
def SetoidFHom.toRelFun {S : ASetoid (A := A) X} {T : ASetoid (A := A) Y}
  (f : SetoidFHom S T) : RelFun S T :=
  Quotient.lift (fun f => RelFun.ofFunctional S T f.1 f.2)
  (fun _ _ h => RelFun.ext fun x y => gamma_equiv h x y) f

/--  $\gamma$  as a map from relational homs into the  $\text{SetoidF}_A$  quotient. -/
noncomputable def SetoidFHom.ofRelFun {S : ASetoid (A := A) X}
  {T : ASetoid (A := A) Y} (hT : T.IsComplete) (f : RelFun S T) :
  SetoidFHom S T :=
  Quotient.mk (functionalSetoid S T)
  <functionalOfRel hT f, functionalOfRel_functional hT f>

theorem SetoidFHom.toRelFun_ofRelFun {S : ASetoid (A := A) X}
  {T : ASetoid (A := A) Y} (hT : T.IsComplete) (f : RelFun S T) :
  SetoidFHom.toRelFun (SetoidFHom.ofRelFun hT f) = f :=
  RelFun.ext fun x y => functionalOfRel_gamma hT f x y

theorem SetoidFHom.ofRelFun_toRelFun {S : ASetoid (A := A) X}
  {T : ASetoid (A := A) Y} (hT : T.IsComplete) (f : SetoidFHom S T) :
  SetoidFHom.ofRelFun hT (SetoidFHom.toRelFun f) = f := by
  refine Quotient.inductionOn f fun f => ?_
  refine Quotient.sound ?_
  intro x
  exact functionalOfRel_ofFunctional hT f.1 f.2 x

/-- Definition 13: if  $Y$  is complete,  $\gamma$  is inverse to  $\gamma$  on homs,
 $\text{SetoidR}_A(X,Y) \sim \text{SetoidF}_A(X,Y)$ . Existing definition_13 is only
 $\gamma \circ \text{comp} \gamma = \text{id}$  on representatives. -/
theorem definition_13_iso {S : ASetoid (A := A) X} {T : ASetoid (A := A) Y}
  (hT : T.IsComplete) :

```

```

    (forall f : RelFun S T,
      SetoidFHom.toRelFun (SetoidFHom.ofRelFun hT f) = f) /\
    (forall f : SetoidFHom S T,
      SetoidFHom.ofRelFun hT (SetoidFHom.toRelFun f) = f) :=
    <SetoidFHom.toRelFun_ofRelFun hT, SetoidFHom.ofRelFun_toRelFun hT>

end Scott2026

```

A.5 Scott2026/Categories.lean

110 lines.

Lean 4 source

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/

import Mathlib.CategoryTheory.Category.Basic
import Scott2026.RelFun

/-!
# Categories of Boolean-valued setoids

This module bundles the object types suppressed in Definitions 8 and 9 and
installs the category structures using Mathlib's category library.
-/

universe u

namespace Scott2026

open CategoryTheory

variable (A : Type u) [CompleteBooleanAlgebra A]

/-- A bundled `A`-setoid, used as an object of `SetoidR_A`. -/
structure SetoidRObj where
  carrier : Type u
  setoid : ASetoid (A := A) carrier

namespace SetoidRObj

instance : CoeSort (SetoidRObj A) (Type u) :=
  <SetoidRObj.carrier>

instance : CategoryStruct (SetoidRObj A) where
  Hom X Y := RelFun X.setoid Y.setoid
  id X := RelFun.id X.setoid
  comp f g := g.comp f

instance : Category (SetoidRObj A) where
  id_comp f := RelFun.comp_id f
  comp_id f := RelFun.id_comp f
  assoc f g h := (RelFun.comp_assoc h g f).symm

@[simp] theorem id_val (X : SetoidRObj A) (x y : X) :
  (? X : X --> X).val x y = X.setoid.eq x y :=
  rfl

@[simp] theorem comp_val {X Y Z : SetoidRObj A}

```

```

    (f : X --> Y) (g : Y --> Z) (x : X) (z : Z) :
    (f ? g).val x z = bigcup y : Y, f.val x y sqcap g.val y z :=
    rfl

end SetoidRObj

/-- A separately bundled `A`-setoid, used as an object of `SetoidF_A`. -/
structure SetoidFObj where
  carrier : Type u
  setoid : ASetoid (A := A) carrier

namespace SetoidFObj

instance : CoeSort (SetoidFObj A) (Type u) :=
  <SetoidFObj.carrier>

instance : CategoryStruct (SetoidFObj A) where
  Hom X Y := SetoidFHom X.setoid Y.setoid
  id X := SetoidFHom.id X.setoid
  comp f g := SetoidFHom.comp g f

theorem id_comp_hom {X Y : SetoidFObj A} (f : X --> Y) :
  SetoidFHom.comp f (SetoidFHom.id X.setoid) = f := by
  induction f using Quotient.inductionOn with
  | _ f =>
    apply Quotient.sound
    intro x
    exact functional_eps_le f.2 x

theorem comp_id_hom {X Y : SetoidFObj A} (f : X --> Y) :
  SetoidFHom.comp (SetoidFHom.id Y.setoid) f = f := by
  induction f using Quotient.inductionOn with
  | _ f =>
    apply Quotient.sound
    intro x
    exact functional_eps_le f.2 x

theorem assoc_hom {W X Y Z : SetoidFObj A}
  (f : W --> X) (g : X --> Y) (h : Y --> Z) :
  SetoidFHom.comp h (SetoidFHom.comp g f) =
  SetoidFHom.comp (SetoidFHom.comp h g) f := by
  induction f using Quotient.inductionOn with
  | _ f =>
    induction g using Quotient.inductionOn with
    | _ g =>
      induction h using Quotient.inductionOn with
      | _ h =>
        apply Quotient.sound
        intro x
        exact functional_eps_le
          (APoset.Functional.comp f.2
            (APoset.Functional.comp g.2 h.2)) x

instance : Category (SetoidFObj A) where
  id_comp := id_comp_hom (A := A)
  comp_id := comp_id_hom (A := A)
  assoc := assoc_hom (A := A)

end SetoidFObj

end Scott2026

```

A.6 Scott2026/PowerSet.lean

131 lines.

Lean 4 source

```
/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/

import Mathlib.Order.Heyting.Basic
import Scott2026.Setoid

/-!
# `A`-valued power sets (paper S2 constructions and Definitions 14-17)

We work with `A`-valued subsets of a ground type `X` (functions `X → A`).
This is the fragment of  $V^A$  used for  ${}^?A(X)$  and for check-sets  $X^\cdot$ .
-/

namespace Scott2026

variable {A : Type*} [CompleteBooleanAlgebra A] {X : Type*}

/-- An `A`-valued subset of a ground type. -/
abbrev ASubset (A : Type*) (X : Type*) := X → A

/-- Check-embedding of an ordinary set (paper S2). -/
noncomputable def checkSet (S : Set X) : ASubset A X :=
  fun x => @ite A (x in S) (Classical.propDecidable _) top False

@[simp] theorem checkSet_mem {S : Set X} {x : X} (hx : x in S) :
  checkSet (A := A) S x = top := if_pos hx

@[simp] theorem checkSet_not_mem {S : Set X} {x : X} (hx : x notin S) :
  checkSet (A := A) S x = False := if_neg hx

/-- Boolean-valued membership for an `A`-subset of a ground type. -/
def memB (x : X) (u : ASubset A X) : A := u x

/-- Boolean-valued inclusion. -/
def subsetB (u v : ASubset A X) : A := ? x, himp (u x) (v x)

/-- Boolean-valued equality of `A`-subsets. -/
def eqB (u v : ASubset A X) : A := subsetB u v sqcap subsetB v u

theorem subsetB_trans (u v w : ASubset A X) :
  subsetB u v sqcap subsetB v w <= subsetB u w := by
  unfold subsetB
  refine le_iInf fun x => ?_
  have := inf_le_inf (iInf_le (fun x => himp (u x) (v x)) x)
    (iInf_le (fun x => himp (v x) (w x)) x)
  refine this.trans ?_
  rw [le_himp_iff]
  have h := himp_inf_himp_inf_le (a := u x) (b := v x) (c := w x)
  simpa [inf_left_comm, inf_comm] using h

/-- The `A`-valued power set of a ground type, as an `A`-setoid (Definition 14). -/
def powerSetoid : ASetoid (A := A) (ASubset A X) where
  eq := eqB
  symm := fun u v => by
    unfold eqB
```

```

    rw [inf_comm]
  trans := fun u v w => by
    unfold eqB
    have h_1 := subsetB_trans u v w
    have h_2 := subsetB_trans w v u
    calc
      eqB u v sqcap eqB v w
      = (subsetB u v sqcap subsetB v u) sqcap (subsetB v w sqcap subsetB w v) := rfl
    _ = (subsetB u v sqcap subsetB v w) sqcap (subsetB v u sqcap subsetB w v) :=
      inf_inf_inf_comm (subsetB u v) (subsetB v u) (subsetB v w) (subsetB w v)
    _ <= subsetB u w sqcap subsetB w u := inf_le_inf h_1 (by
      rw [inf_comm (subsetB v u)]
      exact h_2)

/-- Power-set setoid is total (Proposition 28, totality). -/
theorem powerSetoid_isTotal : (powerSetoid (A := A) (X := X)).IsTotal := by
  intro u
  unfold ASetoid.eps ASetoid.eq powerSetoid eqB subsetB
  simp [himp_self]

/-- Mix of a compatible family of `A`-subsets (the witness used in Theorem 17). -/
def mixSubset {α : Type*} (a : α → A) (u : α → ASubset A X) : ASubset A X :=
  fun x => bigcup i, a i sqcap u i x

/-- Theorem 17, completeness of `Oid(α^A(X))` on ground types. -/
theorem powerSetoid_isComplete : (powerSetoid (A := A) (X := X)).IsComplete := by
  intro ? a u hcomp
  refine <mixSubset a u, fun i => ?_>
  unfold ASetoid.eq powerSetoid eqB
  refine le_inf ?le_mix ?mix_le
  * unfold subsetB mixSubset
    refine le_iInf fun x => ?_
    rw [le_himp_iff]
    exact le_iSup_of_le i le_rfl
  * unfold subsetB mixSubset
    refine le_iInf fun x => ?_
    rw [le_himp_iff, iSup]
    refine ((inf_sSup_eq (a := a i)
      (s := Set.range fun j : α => a j sqcap u j x)).le).trans ?_
    refine iSup_le fun b => iSup_le fun hb => ?_
    obtain <j, rfl> := hb
    have hji : a i sqcap a j <= subsetB (u j) (u i) :=
      (hcomp i j).trans inf_le_right
    have : a i sqcap a j <= himp (u j x) (u i x) :=
      hji.trans (iInf_le (fun y => himp (u j y) (u i y)) x)
    exact (inf_assoc (a i) (a j) (u j x)).symm.trans_le (le_himp_iff.mp this)

/-- Proposition 28, strictness on ground types: `?u = v? = 1` implies `u = v`. -/
theorem powerSetoid_isStrict : (powerSetoid (A := A) (X := X)).IsStrict := by
  intro u v h
  unfold ASetoid.eq powerSetoid eqB at h
  have huv : subsetB u v = top := top_unique (h.symm |> inf_le_left)
  have hvu : subsetB v u = top := top_unique (h.symm |> inf_le_right)
  funext x
  have h_1 : himp (u x) (v x) = top :=
    top_unique (huv.symm |> iInf_le (fun y => himp (u y) (v y)) x)
  have h_2 : himp (v x) (u x) = top :=
    top_unique (hvu.symm |> iInf_le (fun y => himp (v y) (u y)) x)
  exact le_antisymm (himp_eq_top_iff.mp h_1) (himp_eq_top_iff.mp h_2)

/-- `α^A(X)` as an `A`-poset under Boolean-valued inclusion. -/
def powerPoset : APoset (A := A) (ASubset A X) where
  le := subsetB

```

```

trans := subsetB_trans
le_le_refl := fun u v => by
  have hu : subsetB u u = top := by
    unfold subsetB; simp [himp_self]
  have hv : subsetB v v = top := by
    unfold subsetB; simp [himp_self]
  rw [hu, hv, inf_top_eq]
  exact le_top
end Scott2026

```

A.7 Scott2026/Oid.lean

660 lines.

Lean 4 source (lines 1–400)

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/

import Scott2026.RelFun
import Scott2026.VA

/-!
# `Oid` : from `A`-sets to `A`-setoids (CSL 2026, Definitions 14-16)

Definition 14 turns a name `X` in  $V^A$  into an `A`-setoid on  $\text{dom}(X)$ , Definition 15
turns a name `S` with  $?S \text{ subseteq } X? = 1$  into a predicate on  $\text{Oid}(X)$ , and Definition 16
turns a function name  $F : X \rightarrow A \ Y$  into a relational function  $\text{Oid}(X) \rightarrow \text{Oid}(Y)$ .

Only the functor *data* of Definition 16 is proved here (identity and composition);
fullness, faithfulness and essential surjectivity -- hence  $\text{Set}_A \ ? \ \text{SetoidR}_A$  -- are
not claimed. Theorem 17 and Corollary 18 are the completeness (and fullness) of
 $\text{Oid}(P^A(X))$  and of  $\text{Oid}(P^A(X \times A \ Y)) / \text{Oid}(\{X \rightarrow A \ Y\})$ . Proposition 28 adds
the `A`-poset  $\text{powerBPoset}$  on the raw carrier, canonical-name equality on
 $\text{Oid}(P^A(\text{check } Y))$ , and the fixed-point carrier  $\text{CanonicalPowerIdx}$  on which
the induced setoid is strict (raw index-level  $\text{IsStrict}$  fails when a
presentation repeats equivalent children).
-/

universe u

namespace Scott2026

open AName

variable {A : Type u} [CompleteBooleanAlgebra A]

/-!
## Definition 14: `Oid(X)`
-/

/-- Definition 14, equation (3):  $?x = y?_X = ?x \text{ in } X? \text{ sqcap } ?y \text{ in } X? \text{ sqcap } ?x = y?$ ,
on  $\text{dom}(X)$ . -/
noncomputable def oidEq (X : AName.{u} A) (i j : X.idx) : A :=
  memB (X.child i) X sqcap memB (X.child j) X sqcap eqB (X.child i) (X.child j)

/-- Definition 14:  $\text{Oid}(X)$ , the `A`-setoid carried by  $\text{dom}(X)$ . -/
noncomputable def oid (X : AName.{u} A) : ASetoid (A := A) X.idx where
  eq := oidEq X

```



```

symm := fun i j => by
  unfold oidEq
  rw [inf_comm (memB (X.child i) X) (memB (X.child j) X),
    eqB_comm (X.child i) (X.child j)]
trans := fun i j k => by
  unfold oidEq
  refine le_inf (le_inf ?_ ?_) ?_
  * exact inf_le_of_left_le (inf_le_of_left_le inf_le_left)
  * exact inf_le_of_right_le (inf_le_of_left_le inf_le_right)
  * exact (eqB_trans (X.child i) (X.child j) (X.child k)).trans'
    (le_inf (inf_le_of_left_le inf_le_right) (inf_le_of_right_le inf_le_right))

@[simp] theorem oid_eq (X : AName.{u} A) (i j : X.idx) :
  (oid X).eq i j =
    memB (X.child i) X sqcap memB (X.child j) X sqcap eqB (X.child i) (X.child j) :=
  rfl

/-- The extent of `i` in `dom(X)` in `Oid(X)` is `?x_i` in `X`. -/
@[simp] theorem oid_eps (X : AName.{u} A) (i : X.idx) :
  (oid X).eps i = memB (X.child i) X := by
  show oidEq X i i = _
  unfold oidEq
  rw [eqB_self (A := A) (X.child i), inf_top_eq, inf_idem]

/-!
## Definition 15: predicates from subsets
-/

/-- Definition 15: if `?S` subseteq `X` = 1` then `e(S)(x) = ?x` in `S` is a predicate on `Oid
(X)`. -/
noncomputable def ePred (X S : AName.{u} A) (h : subsetB S X = top) :
  ASetoid.Predicate (oid X) where
  val := fun i => memB (X.child i) S
  respects := fun i j => by
    simp only [oid_eq]
    refine le_inf ?_ ?_ <=> rw [le_himp_iff]
    * exact (memB_eqB_left (X.child i) S (X.child j)).trans'
      (le_inf inf_le_right (inf_le_of_left_le inf_le_right))
    * have h_2 := memB_eqB_left (X.child j) S (X.child i)
      rw [eqB_comm (X.child j) (X.child i)] at h_2
      exact h_2.trans' (le_inf inf_le_right (inf_le_of_left_le inf_le_right))
  le_eps := fun i => by
    rw [oid_eps]
    have hmem := memB_of_subsetB (X.child i) S X
    rwa [h, inf_top_eq] at hmem

@[simp] theorem ePred_val (X S : AName.{u} A) (h : subsetB S X = top) (i : X.idx) :
  (ePred X S h).val i = memB (X.child i) S :=
  rfl

/-- Every element of `dom(P^A(X))` is a subset of `X` with Boolean value 1. -/
theorem subsetB_child_powerB (X : AName.{u} A) (p : (powerB X).idx) :
  subsetB ((powerB X).child p) X = top := by
  obtain <v, hv> := p
  exact subsetB_of_le_val X v hv

/-- Definition 15, second sentence: elements of `dom(P^A(X))` give predicates on `Oid(X)`. -/
noncomputable def ePredPowerB (X : AName.{u} A) (p : (powerB X).idx) :
  ASetoid.Predicate (oid X) :=
  ePred X ((powerB X).child p) (subsetB_child_powerB X p)

/-!
## Definition 16: `Oid` on morphisms

```

-/

```

/-- A member of a relation `F` subseteq X x_A Y` lies over `X` and `Y`. -/
theorem memB_opairB_le_of_subsetB {F X Y : AName.{u} A}
  (hsub : subsetB F (prodB X Y) = top) (x y : AName.{u} A) :
  memB (opairB x y) F <= memB x X sqcap memB y Y := by
  have hmem := memB_of_subsetB (opairB x y) F (prodB X Y)
  rwa [hsub, inf_top_eq, memB_opairB_prodB] at hmem

/-- Substitution of equals into a pair-membership. -/
theorem memB_opairB_congr (F x_1 x_2 y_1 y_2 : AName.{u} A) :
  eqB x_1 x_2 sqcap eqB y_1 y_2 sqcap memB (opairB x_1 y_1) F <= memB (opairB x_2 y_2)
  F := by
  have hsubst := memB_eqB_left (opairB x_1 y_1) F (opairB x_2 y_2)
  rw [eqB_opairB x_1 y_1 x_2 y_2] at hsubst
  exact hsubst.trans' (le_inf inf_le_right inf_le_left)

/-- The second component of a pair in `F` subseteq X x_A Y` may be taken in `dom(Y)`. -/
theorem memB_opairB_le_iSup_child {F X Y : AName.{u} A}
  (hsub : subsetB F (prodB X Y) = top) (x y : AName.{u} A) :
  memB (opairB x y) F <= bigcup j : Y.idx, memB (opairB x (Y.child j)) F := by
  have hmem : memB (opairB x y) F <= memB y Y :=
    (memB_opairB_le_of_subsetB hsub x y).trans inf_le_right
  refine (le_inf (le_refl (memB (opairB x y) F)) hmem).trans ?_
  rw [memB_eq (x := y) (y := Y), inf_iSup_eq]
  refine iSup_le fun j => le_iSup_of_le j ?_
  refine (memB_opairB_congr F x x y (Y.child j)).trans' ?_
  refine le_inf (le_inf ?_ (inf_le_of_right_le inf_le_left)) inf_le_left
  exact le_top.trans (eqB_self (A := A) x).ge

/-- Definition 16: `Oid(F)(x, y) = ?(x,y)^A` in `F` for a function name `F : X -> _A Y`. -/
noncomputable def oidRel (X Y F : AName.{u} A) (h : isFunctionB F X Y = top) :
  RelFun (oid X) (oid Y) where
  val := fun i j => memB (opairB (X.child i) (Y.child j)) F
  respects := fun i_1 i_2 j_1 j_2 => by
    simp only [oid_eq]
    refine le_inf ?_ ?_ <;> rw [le_himp_iff]
    * refine (memB_opairB_congr F (X.child i_1) (X.child i_2)
      (Y.child j_1) (Y.child j_2)).trans' ?_
      exact le_inf (le_inf (inf_le_of_left_le (inf_le_of_left_le inf_le_right))
        (inf_le_of_left_le (inf_le_of_right_le inf_le_right))) inf_le_right
    * refine (memB_opairB_congr F (X.child i_2) (X.child i_1)
      (Y.child j_2) (Y.child j_1)).trans' ?_
      rw [eqB_comm (X.child i_2) (X.child i_1), eqB_comm (Y.child j_2) (Y.child j_1)]
      exact le_inf (le_inf (inf_le_of_left_le (inf_le_of_left_le inf_le_right))
        (inf_le_of_left_le (inf_le_of_right_le inf_le_right))) inf_le_right
  le_eps := fun i j => by
    rw [oid_eps, oid_eps]
    exact memB_opairB_le_of_subsetB (isFunctionB_subset h) (X.child i) (Y.child j)
  single_valued := fun i j_1 j_2 => by
    simp only [oid_eq]
    have hY_1 : memB (opairB (X.child i) (Y.child j_1)) F <= memB (Y.child j_1) Y :=
      (memB_opairB_le_of_subsetB (isFunctionB_subset h) _).trans inf_le_right
    have hY_2 : memB (opairB (X.child i) (Y.child j_2)) F <= memB (Y.child j_2) Y :=
      (memB_opairB_le_of_subsetB (isFunctionB_subset h) _).trans inf_le_right
    have hsv := isSingleValuedB_apply F (X.child i) (Y.child j_1) (Y.child j_2)
    rw [isFunctionB_single h] at hsv
    refine le_inf (le_inf (inf_le_left.trans hY_1) (inf_le_right.trans hY_2)) ?_
    exact hsv.trans' (le_inf (le_inf le_top inf_le_left) inf_le_right)
  total := fun i => by
    rw [oid_eps]
    have htot := isTotalB_apply F X (X.child i)
    rw [isFunctionB_total h, top_inf_eq] at htot

```

```

    refine htot.trans (iSup_le fun y => ?_)
    exact memB_opairB_le_iSup_child (isFunctionB_subset h) (X.child i) y

@[simp] theorem oidRel_val (X Y F : AName.{u} A) (h : isFunctionB F X Y = top)
  (i : X.idx) (j : Y.idx) :
  (oidRel X Y F h).val i j = memB (opairB (X.child i) (Y.child j)) F :=
  rfl

/-- Definition 16 for a `Set_A` morphism name, i.e. `?F` in  $(X \rightarrow _A Y)? = 1$ . -/
noncomputable def oidHom (X Y : AName.{u} A) (F : HomName (A := A) X Y) :
  RelFun (oid X) (oid Y) :=
  oidRel X Y F.1 (by rw [← memB_funsB]; exact F.2)

/-- `Oid(F)` only depends on `F` up to `?F = G? = 1`, so it descends to `Set_A(X, Y)`. -/
theorem oidRel_congr {X Y F G : AName.{u} A} (hF : isFunctionB F X Y = top)
  (hG : isFunctionB G X Y = top) (h : eqB F G = top) (i : X.idx) (j : Y.idx) :
  (oidRel X Y F hF).val i j = (oidRel X Y G hG).val i j :=
  eqB_top_memB_right h

/-- Definition 16 on identities: `Oid(id_X)` is the identity relation of `Oid(X)`. -/
theorem oidRel_id (X : AName.{u} A) (i j : X.idx) :
  (oidRel X X (idB X) (isFunctionB_id X)).val i j = (RelFun.id (oid X)).val i j := by
  show memB (opairB (X.child i) (X.child j)) (idB X) = (oid X).eq i j
  rw [memB_opairB_idB, oid_eq]
  refine le_antisymm (le_inf (le_inf inf_le_left ?_) inf_le_right)
  (le_inf (inf_le_of_left_le inf_le_left) inf_le_right)
  exact memB_eqB_left (X.child i) X (X.child j)

/-- Relation composition in `V^A` is a join over `dom(Y)`. -/
theorem memB_opairB_compB {g f X Y Z : AName.{u} A}
  (hf : subsetB f (prodB X Y) = top) (hg : subsetB g (prodB Y Z) = top)
  (x z : AName.{u} A) :
  memB (opairB x z) (compB g f X Z) =
    bigcup j : Y.idx, memB (opairB x (Y.child j)) f sqcap memB (opairB (Y.child j) z) g
  := by
  refine le_antisymm ?_ ?_
  * refine (memB_opairB_compB_le g f X Z x z).trans (iSup_le fun y => ?_)
  have hmem : memB (opairB x y) f <= memB y Y :=
    (memB_opairB_le_of_subsetB hf x y).trans inf_le_right
  refine (le_inf (le_refl (memB (opairB x y) f sqcap memB (opairB y z) g))
    (inf_le_of_left_le hmem)).trans ?_
  rw [memB_eq (x := y) (y := Y), inf_iSup_eq]
  refine iSup_le fun j => le_iSup_of_le j (le_inf ?_ ?_)
  * refine (memB_opairB_congr f x x y (Y.child j)).trans' ?_
  refine le_inf (le_inf (le_top.trans (eqB_self (A := A) x).ge)
    (inf_le_of_right_le inf_le_left)) (inf_le_of_left_le inf_le_left)
  * refine (memB_opairB_congr g y (Y.child j) z z).trans' ?_
  refine le_inf (le_inf (inf_le_of_right_le inf_le_left)
    (le_top.trans (eqB_self (A := A) z).ge)) (inf_le_of_left_le inf_le_right)
  * exact iSup_le fun j => le_memB_opairB_compB g f X Y Z x (Y.child j) z hf hg

/-- Definition 16 on composites: `Oid(g comp f)` is the composite of `Oid(f)` and `Oid(g)`. -/
theorem oidRel_comp {X Y Z f g : AName.{u} A}
  (hf : isFunctionB f X Y = top) (hg : isFunctionB g Y Z = top)
  (i : X.idx) (k : Z.idx) :
  (oidRel X Z (compB g f X Z) (isFunctionB_comp hf hg)).val i k =
    ((oidRel Y Z g hg).comp (oidRel X Y f hf)).val i k := by
  rw [oidRel_val, RelFun.comp_val]
  exact memB_opairB_compB (isFunctionB_subset hf) (isFunctionB_subset hg)
    (X.child i) (Z.child k)

/-!

```

```

## Theorem 17:  $\text{`Oid}(P^A(X))`$  is complete
-/

/-- Every child of  $\text{`P}^A(X)`$  is a member with Boolean value 1. -/
theorem memB_child_powerB (X : AName.{u} A) (p : (powerB X).idx) :
  memB ((powerB X).child p) (powerB X) = top := by
  rw [memB_powerB, subsetB_child_powerB]

/-- Pointwise mix of a family in  $\text{`dom}(P^A(X))`$ . It lands in the domain because
each  $\text{`(p k).1 i} \leq \text{X.val i}`$ . -/
noncomputable def mixPowerB {α : Type*} (X : AName.{u} A)
  (a : α → A) (p : α → (powerB X).idx) : (powerB X).idx :=
  <fun i => bigcup k, a k sqcap (p k).1 i,
  fun i => iSup_le fun k => inf_le_of_right_le ((p k).2 i)>

/-- One inclusion of the mix:  $\text{`a k} \leq \text{?(p k) subseq mix?}`$ . -/
theorem le_subsetB_mixPowerB_left {α : Type*} (X : AName.{u} A)
  (a : α → A) (p : α → (powerB X).idx) (k : α) :
  a k ≤ subsetB ((powerB X).child (p k)) ((powerB X).child (mixPowerB X a p)) := by
  change a k ≤ subsetB (mk X.idx X.child (p k).1)
  (mk X.idx X.child (mixPowerB X a p).1)
  rw [subsetB_mk]
  refine le_iInf fun i => ?_
  rw [le_himp_iff]
  exact (le_iSup_of_le k (le_refl (a k sqcap (p k).1 i))).trans
    (val_le_memB (mk X.idx X.child (mixPowerB (X := X) a p).1) i)

/-- The other inclusion of the mix, from compatibility of the family. -/
theorem le_subsetB_mixPowerB_right {α : Type*} (X : AName.{u} A)
  (a : α → A) (p : α → (powerB X).idx)
  (hcomp : forall k_1 k_2, a k_1 sqcap a k_2 ≤
    eqB ((powerB X).child (p k_1)) ((powerB X).child (p k_2)))
  (k : α) :
  a k ≤ subsetB ((powerB X).child (mixPowerB X a p)) ((powerB X).child (p k)) := by
  change a k ≤ subsetB (mk X.idx X.child (mixPowerB X a p).1)
  (mk X.idx X.child (p k).1)
  rw [subsetB_mk]
  refine le_iInf fun i => ?_
  rw [le_himp_iff]
  change a k sqcap (bigcup j, a j sqcap (p j).1 i) ≤ memB (X.child i) (mk X.idx X.
    child (p k).1)
  rw [inf_iSup_eq]
  refine iSup_le fun j => ?_
  have hsub : a k sqcap a j ≤
    subsetB ((powerB X).child (p j)) ((powerB X).child (p k)) := by
    have heq : a k sqcap a j ≤
      eqB ((powerB X).child (p k)) ((powerB X).child (p j)) := hcomp k j
    rw [eqB_comm (A := A) ((powerB X).child (p k)) ((powerB X).child (p j))] at heq
    exact heq.trans (eqB_le_subsetB _ _)
  refine (subsetB_apply ((powerB X).child (p j)) ((powerB X).child (p k)) i).trans' ?_
  exact le_inf (hsub.trans' (le_inf inf_le_left (inf_le_of_right_le inf_le_left)))
    (inf_le_of_right_le inf_le_right)

/-- Mixing in  $\text{`dom}(P^A(X))`$  realizes Boolean equality of names. -/
theorem le_eqB_mixPowerB {α : Type*} (X : AName.{u} A)
  (a : α → A) (p : α → (powerB X).idx)
  (hcomp : forall k_1 k_2, a k_1 sqcap a k_2 ≤
    eqB ((powerB X).child (p k_1)) ((powerB X).child (p k_2)))
  (k : α) :
  a k ≤ eqB ((powerB X).child (p k)) ((powerB X).child (mixPowerB X a p)) := by
  rw [eqB_eq_subset]
  exact le_inf (le_subsetB_mixPowerB_left X a p k)
    (le_subsetB_mixPowerB_right X a p hcomp k)

```

```

/-- Theorem 17: `Oid(P^A(X))` is a complete `A`-setoid. -/
theorem oid_powerB_isComplete (X : AName.{u} A) :
  (oid (powerB X)).IsComplete := by
  intro ? a p hcomp
  refine <mixPowerB X a p, fun k => ?_>
  simp only [oid_eq]
  rw [memB_child_powerB, memB_child_powerB, top_inf_eq, top_inf_eq]
  refine le_eqB_mixPowerB X a p (fun k_1 k_2 => (hcomp k_1 k_2).trans inf_le_right) k

/-- Theorem 17, totality: `?` is `top` on every child of `P^A(X)`. -/
theorem oid_powerB_isTotal (X : AName.{u} A) :
  (oid (powerB X)).IsTotal := by
  intro p
  rw [oid_eps, memB_child_powerB]

/-- On `Oid(P^A(X))`, setoid equality is Boolean equality of the child names. -/
theorem oid_eq_powerB (X : AName.{u} A) (p q : (powerB X).idx) :
  (oid (powerB X)).eq p q =
  eqB ((powerB X).child p) ((powerB X).child q) := by
  simp only [oid_eq, memB_child_powerB, top_inf_eq]

/-- Canonical representative of `S` as an element of `dom(P^A(X))`. -/
noncomputable def restrictPowerIdx (S X : AName.{u} A) : (powerB X).idx :=
  <fun i => X.val i sqcap memB (X.child i) S, fun _ => inf_le_left>

theorem restrictPowerIdx_child (S X : AName.{u} A) :
  (powerB X).child (restrictPowerIdx S X) = restrictName S X :=
  rfl

/-- Theorem 17, moreover: a congruent predicate that holds of some subset of `X`
is realized by an element of `Oid(P^A(X))`. -/
theorem oid_powerB_full (X : AName.{u} A) (? : AName.{u} A -> A)
  (hcongr : forall S T, eqB S T sqcap ? S <= ? T) (a : A)
  (ha : a = bigcup S, memB S (powerB X) sqcap ? S) :
  exists p : (powerB X).idx, ? ((powerB X).child p) = a := by
  have hphi (S T : AName.{u} A) :
    eqB S T sqcap (memB S (powerB X) sqcap ? S) <= memB T (powerB X) sqcap ? T := by
    refine le_inf ?_ ?_
  * exact (memB_eqB_left (A := A) S (powerB X) T).trans'
    (le_inf (inf_le_of_right_le inf_le_left) inf_le_left)
  * exact (hcongr S T).trans'
    (le_inf inf_le_left (inf_le_of_right_le inf_le_right))
  obtain <S, hS> := fullness (fun T => memB T (powerB X) sqcap ? T) hphi
  let p := restrictPowerIdx S X
  refine <p, le_antisymm ?le ?ge>
  * have hmem : memB (restrictName S X) (powerB X) = top := by
    rw [memB_powerB]
    exact subsetB_of_le_val X (fun i => X.val i sqcap memB (X.child i) S)
      (fun _ => inf_le_left)
  have : ? (restrictName S X) =
    memB (restrictName S X) (powerB X) sqcap ? (restrictName S X) := by
    rw [hmem, top_inf_eq]
  rw [restrictPowerIdx_child, this, ha]
  exact le_iSup (fun T => memB T (powerB X) sqcap ? T) (restrictName S X)
  * have hsub : memB S (powerB X) <= eqB S (restrictName S X) := by
    rw [memB_powerB]
    exact subsetB_le_eqB_restrict S X
  have : a <= eqB S (restrictName S X) sqcap ? S := by
    rw [ha, <- hS]
    exact le_inf (inf_le_left.trans hsub) inf_le_right
  rw [restrictPowerIdx_child]
  exact this.trans (hcongr S (restrictName S X))

```

```

/-!
## Corollary 18: products and function spaces
-/

/-- Corollary 18: `Oid(P^A(X x _A Y))` is complete. -/
theorem oid_prodB_isComplete (X Y : AName.{u} A) :
  (oid (powerB (prodB X Y))).IsComplete :=
  oid_powerB_isComplete (prodB X Y)

/-- Corollary 18, fullness for relations: a congruent predicate realized on
`P^A(X x _A Y)` is realized by an element of `Oid(P^A(X x _A Y))`. -/
theorem oid_prodB_full (X Y : AName.{u} A) (? : AName.{u} A → A)
  (hcongr : forall S T, eqB S T sqcap ? S <= ? T) (a : A)
  (ha : a = bigcup S, memB S (powerB (prodB X Y)) sqcap ? S) :
  exists p : (powerB (prodB X Y)).idx, ? ((powerB (prodB X Y)).child p) = a :=
  oid_powerB_full (prodB X Y) ? hcongr a ha

/-- Corollary 18: `Oid({X → _A Y})` is complete. The pointwise mix of functions
stays a function by `isFunctionB_congr`. -/
theorem oid_funsB_isComplete (X Y : AName.{u} A) :
  (oid (funsB X Y)).IsComplete := by
  intro ? a p hcomp
  let w : (funsB X Y).idx := mixPowerB (prodB X Y) a p
  refine <w, fun k => ?_>
  simp only [oid_eq]
  have hchild (q : (funsB X Y).idx) :
    (funsB X Y).child q = (powerB (prodB X Y)).child q := rfl
  have heq : a k <= eqB ((funsB X Y).child (p k)) ((funsB X Y).child w) := by
    rw [hchild, hchild]
    exact le_eqB_mixPowerB (prodB X Y) a p
    (fun k_1 k_2 => (hcomp k_1 k_2).trans inf_le_right) k
  have hpk : a k <= isFunctionB ((funsB X Y).child (p k)) X Y := by
    have : a k <= (oid (funsB X Y)).eps (p k) := by
      simpa [ASetoid.eps] using hcomp k k
    rw [oid_eps, memB_funsB] at this
    exact this
  have hw : a k <= isFunctionB ((funsB X Y).child w) X Y :=
    (isFunctionB_congr ((funsB X Y).child (p k)) ((funsB X Y).child w) X Y).trans'
    (le_inf heq hpk)
  rw [memB_funsB, memB_funsB]
  exact le_inf (le_inf hpk hw) heq

/-- Corollary 18, fullness for functions. -/
theorem oid_funsB_full (X Y : AName.{u} A) (? : AName.{u} A → A)

```

Lean 4 source (lines 401–660)

```

(hcongr : forall F G, eqB F G sqcap ? F <= ? G) (a : A)
(ha : a = bigcup F, memB F (funsB X Y) sqcap ? F) :
exists p : (funsB X Y).idx,
  memB ((funsB X Y).child p) (funsB X Y) sqcap ? ((funsB X Y).child p) = a := by
have hphi (F G : AName.{u} A) :
  eqB F G sqcap (memB F (funsB X Y) sqcap ? F) <= memB G (funsB X Y) sqcap ? G :=
  by
  refine le_inf ?_ ?_
  * exact (memB_eqB_left (A := A) F (funsB X Y) G).trans'
    (le_inf (inf_le_of_right_le inf_le_left) inf_le_left)
  * exact (hcongr F G).trans'
    (le_inf inf_le_left (inf_le_of_right_le inf_le_right))
obtain <F, hF> := fullness (fun G => memB G (funsB X Y) sqcap ? G) hphi
let p : (funsB X Y).idx := restrictPowerIdx F (prodB X Y)
have hchild : (funsB X Y).child p = restrictName F (prodB X Y) := rfl
refine <p, le_antisymm ?le ?ge>

```

```

* rw [hchild, ha]
  exact le_iSup (fun G => memB G (funsB X Y) sqcap ? G) (restrictName F (prodB X Y))
* have hfun : memB F (funsB X Y) <= isFunctionB F X Y := by
  rw [memB_funsB]
  have hsub : isFunctionB F X Y <= eqB F (restrictName F (prodB X Y)) := by
    unfold isFunctionB
    exact (inf_le_of_left_le inf_le_left).trans (subsetB_le_eqB_restrict F (prodB X Y))
  have h? : a <= ? (restrictName F (prodB X Y)) := by
    rw [ha, <- hF]
    exact (le_inf (inf_le_left.trans (hfun.trans hsub)) inf_le_right).trans
      (hcongr F (restrictName F (prodB X Y)))
  have hmem : a <= memB (restrictName F (prodB X Y)) (funsB X Y) := by
    rw [memB_funsB, ha, <- hF]
    refine (isFunctionB_congr F (restrictName F (prodB X Y)) X Y).trans'
      (le_inf (inf_le_left.trans (hfun.trans hsub)) (inf_le_left.trans hfun))
  rw [hchild]
  exact le_inf hmem h?

/-!
## Proposition 28:  $P^A(X)$  as an  $A$ -poset; canonical equality on  $\text{check } Y$ 

The continuous-lattice clause is isContinuousLatticeSubsetB_powerB in
Scott2026.InternalDomain. The base clause is not stated here.
-/

/-- Boolean inclusion is reflexive. -/
theorem subsetB_self (x : AName.{u} A) : subsetB x x = top :=
  iInf_eq_top.mpr fun i => himp_eq_top_iff.mpr (val_le_memB x i)

/-- Definition 11 on  $P^A(X)$ : Boolean inclusion on the same carrier as  $\text{Oid}(P^A(X))$ . -/
noncomputable def powerBPoset (X : AName.{u} A) : APoset (A := A) (powerB X).idx where
  le p q := subsetB ((powerB X).child p) ((powerB X).child q)
  trans p q r :=
    subsetB_trans ((powerB X).child p) ((powerB X).child q) ((powerB X).child r)
  le_le_refl p q := by
    have hp : subsetB ((powerB X).child p) ((powerB X).child p) = top :=
      subsetB_self _
    have hq : subsetB ((powerB X).child q) ((powerB X).child q) = top :=
      subsetB_self _
    rw [hp, hq, inf_top_eq]
    exact le_top

/-- Definition 11, equation (1): symmetrized inclusion is  $\text{Oid}(P^A(X))$  equality. -/
theorem powerBPoset_eq (X : AName.{u} A) (p q : (powerB X).idx) :
  (powerBPoset X).eq p q = (oid (powerB X)).eq p q := by
  unfold APoset.eq powerBPoset
  rw [oid_eq_powerB, eqB_eq_subset]

/-- Proposition 28, canonical equality at  $X = \text{check } Y$ :  $?S = T?_{P^A(\text{check } Y)} = 1$ 
iff  $?S = T? = 1$ , and the canonical names (same domain as  $\text{check } Y$ , values
 $?y$  in  $??$ ) are then equal. AName has no [ext]; the mk's are equated by
congr_arg / funext. This is not index-level IsStrict: a pre-set may
repeat equivalent children, so two valuations can be Boolean-equal without
matching pointwise. -/
theorem oid_powerB_check_canonical_eq (Y : PSet.{u})
  {p q : (powerB (check (A := A) Y)).idx}
  (h : (oid (powerB (check (A := A) Y))).eq p q = top) :
  restrictName ((powerB (check (A := A) Y)).child p) (check (A := A) Y) =
  restrictName ((powerB (check (A := A) Y)).child q) (check (A := A) Y) := by
  have heq : eqB ((powerB (check (A := A) Y)).child p)
    ((powerB (check (A := A) Y)).child q) = top := by
    rwa [oid_eq_powerB] at h
  refine congr_arg (mk (check (A := A) Y).idx (check (A := A) Y).child) ?_

```

```

exact funext fun i => by rw [eqB_top_memB_right (A := A) heq]

/-!
## Proposition 28: canonical (fixed-point) carrier of  $P^A(X)$ 

A raw index  $p : (\text{powerB } X).\text{idx}$  stores a valuation  $p.1 : X.\text{idx} \rightarrow A$ . Boolean
equality at  $\text{top}$  only forces  $?t$  in child  $p? = ?t$  in child  $q?$ , not  $p.1 = q.1$ ,
because  $\text{memB}$  joins over equivalent children. The fixed points of
 $\text{restrictPowerIdx (child *) } X$  store those membership values, so they are
strict. Completeness is the raw mix followed by this normalization.
-/

/-- Restriction of  $S$  to  $\text{dom}(X)$  is idempotent as a  $P^A(X)$  index. -/
theorem restrictPowerIdx_restrictName (S X : AName.{u} A) :
  restrictPowerIdx (restrictName S X) X = restrictPowerIdx S X := by
  refine Subtype.ext (funext fun i => ?_)
  change X.val i sqcap memB (X.child i) (restrictName S X) =
    X.val i sqcap memB (X.child i) S
  refine le_antisymm (le_inf inf_le_left ?le) (le_inf inf_le_left ?ge)
  * have hmem : memB (X.child i) (restrictName S X) =
      bigcup j, eqB (X.child i) (X.child j) sqcap (X.val j sqcap memB (X.child j) S) :=
    by
      rw [restrictName, memB_mk]
      rw [hmem]
      refine inf_le_right.trans (iSup_le fun j => ?_)
      exact (memB_eqB_left' (X.child j) S (X.child i)).trans'
        (le_inf inf_le_left (inf_le_of_right_le inf_le_right))
  * have := val_le_memB (restrictName S X) i
  change X.val i sqcap memB (X.child i) S <=
    memB (X.child i) (restrictName S X) at this
  exact this

/-- Indices of  $P^A(X)$  that already store  $?t$  in  $*?$  on  $\text{dom}(X)$ . -/
def CanonicalPowerIdx (X : AName.{u} A) : Type u :=
  {p : (powerB X).idx // restrictPowerIdx ((powerB X).child p) X = p}

/-- Every restricted index is a fixed point of restriction. -/
theorem restrictPowerIdx_isCanonical (S X : AName.{u} A) :
  restrictPowerIdx ((powerB X).child (restrictPowerIdx S X)) X =
    restrictPowerIdx S X := by
  rw [restrictPowerIdx_child, restrictPowerIdx_restrictName]

/-- Normalize a raw  $P^A(X)$  index to the canonical carrier. -/
noncomputable def normalizePowerIdx (X : AName.{u} A) (p : (powerB X).idx) :
  CanonicalPowerIdx X :=
  <restrictPowerIdx ((powerB X).child p) X, restrictPowerIdx_isCanonical _ X>

theorem normalizePowerIdx_val (X : AName.{u} A) (p : (powerB X).idx) :
  (normalizePowerIdx X p).1 = restrictPowerIdx ((powerB X).child p) X :=
  rfl

/-- Normalization lands in the canonical carrier (packaged). -/
theorem normalizePowerIdx_isCanonical (X : AName.{u} A) (p : (powerB X).idx) :
  restrictPowerIdx ((powerB X).child (normalizePowerIdx X p).1) X =
    (normalizePowerIdx X p).1 :=
  (normalizePowerIdx X p).2

/-- Normalization is idempotent on raw indices. -/
theorem normalizePowerIdx_idem (X : AName.{u} A) (p : (powerB X).idx) :
  normalizePowerIdx X (normalizePowerIdx X p).1 = normalizePowerIdx X p :=
  Subtype.ext (restrictPowerIdx_isCanonical ((powerB X).child p) X)

/-- A canonical index is a fixed point of normalization. -/

```



```

theorem normalizePowerIdx_canonical (X : AName.{u} A) (p : CanonicalPowerIdx X) :
  normalizePowerIdx X p.1 = p :=
  Subtype.ext p.2

/-- `S` subseteq `X` implies `?S = restrictName S X? = 1`. -/
theorem eqB_restrictName_of_subsetB (S X : AName.{u} A) (h : subsetB S X = top) :
  eqB S (restrictName S X) = top :=
  top_unique ((subsetB_le_eqB_restrict S X).trans' h.ge)

/-- Each raw element is Boolean-equal at `top` to its normalization. -/
theorem normalizePowerIdx_eqB (X : AName.{u} A) (p : (powerB X).idx) :
  eqB ((powerB X).child p) ((powerB X).child (normalizePowerIdx X p).1) = top := by
  rw [normalizePowerIdx_val, restrictPowerIdx_child]
  exact eqB_restrictName_of_subsetB _ X (subsetB_child_powerB X p)

theorem normalizePowerIdx_oid_eq (X : AName.{u} A) (p : (powerB X).idx) :
  (oid (powerB X)).eq p (normalizePowerIdx X p).1 = top := by
  rw [oid_eq_powerB]
  exact normalizePowerIdx_eqB X p

theorem eqB_top_subsetB_left {x y z : AName.{u} A} (h : eqB x y = top) :
  subsetB x z = subsetB y z := by
  have hxy : subsetB x y = top := top_unique (h.symm |> eqB_le_subsetB x y)
  have hyx : subsetB y x = top := by
    rw [eqB_comm] at h
    exact top_unique (h.symm |> eqB_le_subsetB y x)
  refine le_antisymm ?_ ?_
  * have := subsetB_trans y x z
    rwa [hyx, top_inf_eq] at this
  * have := subsetB_trans x y z
    rwa [hxy, top_inf_eq] at this

theorem eqB_top_subsetB_right {x y z : AName.{u} A} (h : eqB y z = top) :
  subsetB x y = subsetB x z :=
  iInf_congr fun i => by rw [eqB_top_memB_right h]

/-- Boolean inclusion is preserved by normalization. -/
theorem normalizePowerIdx_subsetB (X : AName.{u} A) (p q : (powerB X).idx) :
  subsetB ((powerB X).child (normalizePowerIdx X p).1)
    ((powerB X).child (normalizePowerIdx X q).1) =
  subsetB ((powerB X).child p) ((powerB X).child q) := by
  rw [eqB_top_subsetB_left (normalizePowerIdx_eqB X p),
    eqB_top_subsetB_right (normalizePowerIdx_eqB X q)]

/-- Boolean equality is preserved by normalization. -/
theorem normalizePowerIdx_eqB_eq (X : AName.{u} A) (p q : (powerB X).idx) :
  eqB ((powerB X).child (normalizePowerIdx X p).1)
    ((powerB X).child (normalizePowerIdx X q).1) =
  eqB ((powerB X).child p) ((powerB X).child q) := by
  rw [eqB_eq_subset, eqB_eq_subset, normalizePowerIdx_subsetB,
    normalizePowerIdx_subsetB]

/-- Definition 14 on the canonical carrier: restrict `Oid(P^A(X))`. -/
noncomputable def canonicalPowerSetoid (X : AName.{u} A) :
  ASetoid (A := A) (CanonicalPowerIdx X) where
  eq p q := (oid (powerB X)).eq p.1 q.1
  symm p q := (oid (powerB X)).symm p.1 q.1
  trans p q r := (oid (powerB X)).trans p.1 q.1 r.1

@[simp] theorem canonicalPowerSetoid_eq (X : AName.{u} A)
  (p q : CanonicalPowerIdx X) :
  (canonicalPowerSetoid X).eq p q = (oid (powerB X)).eq p.1 q.1 :=
  rfl

```

```

/-- Definition 11 on the canonical carrier: restrict `powerBPoset`. -/
noncomputable def canonicalPowerPoset (X : AName.{u} A) :
  APoset (A := A) (CanonicalPowerIdx X) where
  le p q := (powerBPoset X).le p.1 q.1
  trans p q r := (powerBPoset X).trans p.1 q.1 r.1
  le_le_refl p q := (powerBPoset X).le_le_refl p.1 q.1

@[simp] theorem canonicalPowerPoset_le (X : AName.{u} A)
  (p q : CanonicalPowerIdx X) :
  (canonicalPowerPoset X).le p q =
    subsetB ((powerB X).child p.1) ((powerB X).child q.1) :=
  rfl

/-- Definition 11, equation (1) on the canonical carrier. -/
theorem canonicalPowerPoset_eq (X : AName.{u} A) (p q : CanonicalPowerIdx X) :
  (canonicalPowerPoset X).eq p q = (canonicalPowerSetoid X).eq p q :=
  powerBPoset_eq X p.1 q.1

/-- The canonical carrier is total: each restricted child still has extent `top`. -/
theorem canonicalPowerSetoid_isTotal (X : AName.{u} A) :
  (canonicalPowerSetoid X).IsTotal := fun p =>
  oid_powerB_isTotal X p.1

/-- The canonical carrier is strict for arbitrary `X`: Boolean equality at `top`
  equates membership values, and the fixed-point hypotheses equate indices. -/
theorem canonicalPowerSetoid_isStrict (X : AName.{u} A) :
  (canonicalPowerSetoid X).IsStrict := by
  intro p q h
  have heq : eqB ((powerB X).child p.1) ((powerB X).child q.1) = top := by
    rwa [canonicalPowerSetoid_eq, oid_eq_powerB] at h
  have hrest :
    restrictPowerIdx ((powerB X).child p.1) X =
    restrictPowerIdx ((powerB X).child q.1) X :=
  Subtype.ext (funext fun i => by
    change X.val i sqcap memB (X.child i) ((powerB X).child p.1) =
    X.val i sqcap memB (X.child i) ((powerB X).child q.1)
    rw [eqB_top_memB_right heq])
  refine Subtype.ext ?_
  calc p.1 = restrictPowerIdx ((powerB X).child p.1) X := p.2.symm
  _ = restrictPowerIdx ((powerB X).child q.1) X := hrest
  _ = q.1 := q.2

/-- Completeness: mix on the raw carrier, then normalize. The mix is
  Boolean-equal at `top` to its restriction, so it remains a mix witness. -/
theorem canonicalPowerSetoid_isComplete (X : AName.{u} A) :
  (canonicalPowerSetoid X).IsComplete := by
  intro ? a p hcomp
  obtain <m, hm> :=
    oid_powerB_isComplete X ? a (fun k => (p k).1) (fun k_1 k_2 => hcomp k_1 k_2)
  refine <normalizePowerIdx X m, fun k => ?_>
  have hmn : (oid (powerB X)).eq m (normalizePowerIdx X m).1 = top :=
    normalizePowerIdx_oid_eq X m
  refine ((oid (powerB X)).trans (p k).1 m (normalizePowerIdx X m).1).trans' ?_
  exact le_inf (hm k) (by rw [hmn]; exact le_top)
end Scott2026

```

A.8 Scott2026/SetCategory.lean

367 lines.

[Lean 4 source](#)

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/

import Mathlib.CategoryTheory.Category.Basic
import Mathlib.CategoryTheory.Functor.FullyFaithful
import Scott2026.Categories
import Scott2026.Oid

/-!
# The category of Boolean-valued sets

This module bundles `Set_A`, lifts identity and relational composition through
the name quotient, and packages Definition 16 as a Mathlib functor.
-/

universe u

namespace Scott2026

open AName CategoryTheory

variable {A : Type u} [CompleteBooleanAlgebra A]

/-- A relation contained in `X x _A Y` is determined by its matrix on
`dom(X) x dom(Y)`. -/
theorem memB_eq_iSup_matrix_of_subset {F X Y : AName.{u} A}
  (hF : subsetB F (prodB X Y) = top) (w : AName.{u} A) :
  memB w F =
    bigcup p : X.idx x Y.idx,
      eqB w (opairB (X.child p.1) (Y.child p.2)) sqcap
        memB (opairB (X.child p.1) (Y.child p.2)) F := by
  let pairName := fun p : X.idx x Y.idx =>
    opairB (X.child p.1) (Y.child p.2)
  have hw : memB w F <= memB w (prodB X Y) := by
    have h := memB_of_subsetB w F (prodB X Y)
    rwa [hF, inf_top_eq] at h
  have hprod :
    memB w (prodB X Y) =
      bigcup p : X.idx x Y.idx,
        eqB w (pairName p) sqcap
          (memB (X.child p.1) X sqcap memB (Y.child p.2) Y) := by
    rw [memB_eq]
    unfold prodB
    rfl
  apply le_antisymm
  * calc
    memB w F = memB w F sqcap memB w (prodB X Y) :=
      (inf_eq_left.mpr hw).symm
    _ = memB w F sqcap
      ( bigcup p : X.idx x Y.idx,
        eqB w (pairName p) sqcap
          (memB (X.child p.1) X sqcap memB (Y.child p.2) Y)) := by
      rw [hprod]
    _ = bigcup p : X.idx x Y.idx,
      memB w F sqcap
        (eqB w (pairName p) sqcap
          (memB (X.child p.1) X sqcap memB (Y.child p.2) Y)) := by
      rw [inf_iSup_eq]
    _ <= bigcup p : X.idx x Y.idx,
      eqB w (pairName p) sqcap memB (pairName p) F := by

```

```

    refine iSup_mono fun p => ?_
    refine le_inf (inf_le_of_right_le inf_le_left) ?_
    exact (memB_eqB_left w F (pairName p)).trans'
      (le_inf inf_le_left (inf_le_of_right_le inf_le_left))
* refine iSup_le fun p => ?_
  exact memB_eqB_left' (pairName p) F w

/-- Extensionality for function relations from equality of their `Oid`
matrices. -/
theorem eqB_top_of_function_matrix {F G X Y : AName.{u} A}
  (hF : isFunctionB F X Y = top) (hG : isFunctionB G X Y = top)
  (h : forall i : X.idx, forall j : Y.idx,
    memB (opairB (X.child i) (Y.child j)) F =
    memB (opairB (X.child i) (Y.child j)) G) :
  eqB F G = top := by
  have hmem (w : AName.{u} A) : memB w F = memB w G := by
    rw [memB_eq_iSup_matrix_of_subset (isFunctionB_subset hF) w,
      memB_eq_iSup_matrix_of_subset (isFunctionB_subset hG) w]
  refine iSup_congr fun p => ?_
  rw [h p.1 p.2]
  rw [eqB_eq_subset, subsetB_eq_iInf, subsetB_eq_iInf]
  apply inf_eq_top_iff.mpr
  constructor
  * exact iInf_eq_top.mpr fun w => by rw [hmem w, himp_self]
  * exact iInf_eq_top.mpr fun w => by rw [← hmem w, himp_self]

/-- `Oid` on a quotient morphism of `Set_A`. -/
noncomputable def oidHomQ (X Y : AName.{u} A) (F : homB X Y) :
  RelFun (oid X) (oid Y) :=
  Quotient.lift (oidHom X Y)
    (fun F G h => RelFun.ext fun i j =>
      oidRel_congr
        (by rw [← memB_funsB]; exact F.2)
        (by rw [← memB_funsB]; exact G.2) h i j) F

/-- Faithfulness of `Oid` on each `Set_A` hom-set. -/
theorem oidHomQ_injective (X Y : AName.{u} A) :
  Function.Injective (oidHomQ X Y) := by
  intro F G h
  induction F using Quotient.inductionOn with
  | _ F =>
    induction G using Quotient.inductionOn with
    | _ G =>
      apply Quotient.sound
      apply eqB_top_of_function_matrix
        (by rw [← memB_funsB]; exact F.2)
        (by rw [← memB_funsB]; exact G.2)
      intro i j
      exact congrArg (fun r : RelFun (oid X) (oid Y) => r.val i j) h

/-- The graph name associated with a relational function between two `Oid`
objects. -/
noncomputable def relFunGraphName (X Y : AName.{u} A)
  (f : RelFun (oid X) (oid Y)) : AName.{u} A :=
  mk (X.idx x Y.idx)
    (fun p => opairB (X.child p.1) (Y.child p.2))
    (fun p => f.val p.1 p.2)

/-- Evaluation of a relational graph name recovers the relation exactly. -/
theorem memB_opairB_relFunGraphName (X Y : AName.{u} A)
  (f : RelFun (oid X) (oid Y)) (i : X.idx) (j : Y.idx) :
  memB (opairB (X.child i) (Y.child j)) (relFunGraphName X Y f) =
  f.val i j := by

```

```

rw [relFunGraphName, memB_mk]
apply le_antisymm
* refine iSup_le fun p => ?_
  rw [eqB_opairB]
  let t := (eqB (X.child i) (X.child p.1) sqcap
    eqB (Y.child j) (Y.child p.2)) sqcap f.val p.1 p.2
  have htEqX : t <= eqB (X.child p.1) (X.child i) := by
    rw [eqB_comm]
    exact inf_le_of_left_le inf_le_left
  have htEqY : t <= eqB (Y.child p.2) (Y.child j) := by
    rw [eqB_comm]
    exact inf_le_of_left_le inf_le_right
  have htF : t <= f.val p.1 p.2 := inf_le_right
  have hfX : f.val p.1 p.2 <= memB (X.child p.1) X := by
    have h := (f.le_eps p.1 p.2).trans inf_le_left
    rwa [oid_eps] at h
  have hfY : f.val p.1 p.2 <= memB (Y.child p.2) Y := by
    have h := (f.le_eps p.1 p.2).trans inf_le_right
    rwa [oid_eps] at h
  have htXi : t <= memB (X.child i) X :=
    (memB_eqB_left (X.child p.1) X (X.child i)).trans'
    (le_inf (htF.trans hfX) htEqX)
  have htYj : t <= memB (Y.child j) Y :=
    (memB_eqB_left (Y.child p.2) Y (Y.child j)).trans'
    (le_inf (htF.trans hfY) htEqY)
  have htSX : t <= (oid X).eq p.1 i := by
    rw [oid_eq]
    exact le_inf (le_inf (htF.trans hfX) htXi) htEqX
  have htTY : t <= (oid Y).eq p.2 j := by
    rw [oid_eq]
    exact le_inf (le_inf (htF.trans hfY) htYj) htEqY
  have hil : t <= f.val i p.2 :=
    (f.subst_left p.1 i p.2).trans' (le_inf htSX htF)
  exact (f.subst_right i p.2 j).trans' (le_inf htTY hil)
* exact le_iSup_of_le (i, j) (by rw [eqB_self, top_inf_eq])

/-- A relational graph name is a subset of the internal product. -/
theorem subsetB_relFunGraphName (X Y : AName.{u} A)
  (f : RelFun (oid X) (oid Y)) :
  subsetB (relFunGraphName X Y f) (prodB X Y) = top := by
  unfold relFunGraphName prodB
  rw [subsetB_mk]
  apply iInf_eq_top.mpr
  intro p
  rw [himp_eq_top_iff]
  have hbound : f.val p.1 p.2 <=
    memB (X.child p.1) X sqcap memB (Y.child p.2) Y := by
    simpa only [oid_eps] using f.le_eps p.1 p.2
  exact hbound.trans (val_le_memB
    (mk (X.idx x Y.idx)
      (fun q => opairB (X.child q.1) (Y.child q.2))
      (fun q => memB (X.child q.1) X sqcap memB (Y.child q.2) Y)) p)

/-- Two graph-membership generators with the same source force equality of
their arbitrary target names. -/
theorem relFunGraph_single_term (X Y : AName.{u} A)
  (f : RelFun (oid X) (oid Y)) (x y_1 y_2 : AName.{u} A)
  (i k : X.idx) (j l : Y.idx) :
  (eqB (opairB x y_1) (opairB (X.child i) (Y.child j)) sqcap f.val i j) sqcap
  (eqB (opairB x y_2) (opairB (X.child k) (Y.child l)) sqcap f.val k l) <=
  eqB y_1 y_2 := by
  let t :=
    (eqB (opairB x y_1) (opairB (X.child i) (Y.child j)) sqcap f.val i j) sqcap

```

```

      (eqB (opairB x y_2) (opairB (X.child k) (Y.child l)) sqcap f.val k l)
have hp_1 : t <= eqB (opairB x y_1) (opairB (X.child i) (Y.child j)) :=
  inf_le_left.trans inf_le_left
have hp_2 : t <= eqB (opairB x y_2) (opairB (X.child k) (Y.child l)) :=
  inf_le_right.trans inf_le_left
rw [eqB_opairB] at hp_1 hp_2
have hx_1 : t <= eqB x (X.child i) := hp_1.trans inf_le_left
have hy_1 : t <= eqB y_1 (Y.child j) := hp_1.trans inf_le_right
have hx_2 : t <= eqB x (X.child k) := hp_2.trans inf_le_left
have hy_2 : t <= eqB y_2 (Y.child l) := hp_2.trans inf_le_right
have hf_1 : t <= f.val i j := inf_le_left.trans inf_le_right
have hf_2 : t <= f.val k l := inf_le_right.trans inf_le_right
have hmemXi : t <= memB (X.child i) X := by
  have h := (f.le_eps i j).trans inf_le_left
  rw [oid_eps] at h
  exact hf_1.trans h
have hmemXk : t <= memB (X.child k) X := by
  have h := (f.le_eps k l).trans inf_le_left
  rw [oid_eps] at h
  exact hf_2.trans h
have hXiXk : t <= eqB (X.child i) (X.child k) := by
  refine (eqB_trans (X.child i) x (X.child k)).trans' (le_inf ?_ hx_2)
  rwa [eqB_comm]
have hSik : t <= (oid X).eq i k := by
  rw [oid_eq]
  exact le_inf (le_inf hmemXi hmemXk) hXiXk
have hSki : t <= (oid X).eq k i := by
  rw [(oid X).symm]
  exact hSik
have hfil : t <= f.val i l :=
  (f.subst_left k i l).trans' (le_inf hSki hf_2)
have hTjl : t <= (oid Y).eq j l :=
  (f.single_valued i j l).trans' (le_inf hf_1 hfil)
have hYjYl : t <= eqB (Y.child j) (Y.child l) := by
  rw [oid_eq] at hTjl
  exact hTjl.trans inf_le_right
have hy_1l : t <= eqB y_1 (Y.child l) :=
  (eqB_trans y_1 (Y.child j) (Y.child l)).trans' (le_inf hy_1 hYjYl)
refine (eqB_trans y_1 (Y.child l) y_2).trans' (le_inf hy_1l ?_)
rw [eqB_comm (Y.child l) y_2]
exact hy_2

/-- The graph name of a relational function is internally single-valued. -/
theorem isSingleValuedB_relFunGraphName (X Y : AName.{u} A)
  (f : RelFun (oid X) (oid Y)) :
  isSingleValuedB (relFunGraphName X Y f) = top := by
  unfold isSingleValuedB
  refine iInf_eq_top.mpr fun x => iInf_eq_top.mpr fun y_1 =>
    iInf_eq_top.mpr fun y_2 => himp_eq_top_iff.mpr ?_
  rw [relFunGraphName, memB_mk, memB_mk, iSup_inf_eq]
  refine iSup_le fun p => ?_
  rw [inf_iSup_eq]
  refine iSup_le fun q => ?_
  exact relFunGraph_single_term X Y f x y_1 y_2 p.1 q.1 p.2 q.2

/-- The graph name of a relational function is internally total. -/
theorem isTotalB_relFunGraphName (X Y : AName.{u} A)
  (f : RelFun (oid X) (oid Y)) :
  isTotalB (relFunGraphName X Y f) X = top := by
  unfold isTotalB
  refine iInf_eq_top.mpr fun x => himp_eq_top_iff.mpr ?_
  rw [memB_eq]
  refine iSup_le fun i => ?_

```

```

have httotal : memB (X.child i) X <= bigcup j : Y.idx, f.val i j := by
  have h := f.total i
  rwa [oid_eps] at h
refine (inf_le_inf le_rfl ((val_le_memB X i).trans httotal)).trans ?_
rw [inf_iSup_eq]
refine iSup_le fun j => ?_
refine le_iSup_of_le (Y.child j) ?_
rw [relFunGraphName, memB_mk]
refine le_iSup_of_le (i, j) ?_
rw [eqB_opairB, eqB_self, inf_top_eq]

/-- The graph reconstructed from a relational function satisfies the full
internal function predicate, including quantification over arbitrary names. -/
theorem isFunctionB_relFunGraphName (X Y : AName.{u} A)
  (f : RelFun (oid X) (oid Y)) :
  isFunctionB (relFunGraphName X Y f) X Y = top := by
  unfold isFunctionB
  exact inf_eq_top_iff.mpr
  <inf_eq_top_iff.mpr
  <subsetB_relFunGraphName X Y f, isSingleValuedB_relFunGraphName X Y f>,
  isTotalB_relFunGraphName X Y f>

/-- A relational function reconstructed as a function name. -/
noncomputable def relFunToHomName (X Y : AName.{u} A)
  (f : RelFun (oid X) (oid Y)) : HomName (A := A) X Y :=
  <relFunGraphName X Y f, by
  rw [memB_funsB]
  exact isFunctionB_relFunGraphName X Y f>

/-- The reconstructed function name maps back to the original relational
function. -/
theorem oidHom_relFunToHomName (X Y : AName.{u} A)
  (f : RelFun (oid X) (oid Y)) :
  oidHom X Y (relFunToHomName X Y f) = f :=
  RelFun.ext fun i j => memB_opairB_relFunGraphName X Y f i j

/-- Identity in `Set_A`. -/
noncomputable def homBId (X : AName.{u} A) : homB X X :=
  Quotient.mk _ <idB X, isHom_id X>

/-- Composition in `Set_A`, lifted through Boolean equality at `top`. -/
noncomputable def homBComp {X Y Z : AName.{u} A} (g : homB Y Z) (f : homB X Y) :
  homB X Z :=
  Quotient.liftOn_2 g f
  (fun g f => Quotient.mk _
    <compB g.1 f.1 X Z, isHom_comp f.2 g.2>)
  (fun g_1 f_1 g_2 f_2 hg hf =>
    Quotient.sound (compB_congr hf hg))

theorem oidHomQ_id (X : AName.{u} A) :
  oidHomQ X X (homBId X) = RelFun.id (oid X) :=
  RelFun.ext fun i j => oidRel_id X i j

theorem oidHomQ_comp {X Y Z : AName.{u} A}
  (g : homB Y Z) (f : homB X Y) :
  oidHomQ X Z (homBComp g f) = (oidHomQ Y Z g).comp (oidHomQ X Y f) := by
  induction f using Quotient.inductionOn with
  | _ f =>
    induction g using Quotient.inductionOn with
    | _ g =>
      exact RelFun.ext fun i j =>
        oidRel_comp
        (by rw [ <- memB_funsB]; exact f.2)

```

```

      (by rw [ <- memB_funsB]; exact g.2) i j

/-- Bundled objects of `Set_A`. -/
structure SetAObj (A : Type u) [CompleteBooleanAlgebra A] where
  name : AName.{u} A

namespace SetAObj

noncomputable instance : CategoryStruct (SetAObj A) where
  Hom X Y := homB X.name Y.name
  id X := homBId X.name
  comp f g := homBComp g f

noncomputable instance : Category (SetAObj A) where
  id_comp f := by
    change homBComp f (homBId _) = f
    apply oidHomQ_injective
    rw [oidHomQ_comp, oidHomQ_id, RelFun.comp_id]
  comp_id f := by
    change homBComp (homBId _) f = f
    apply oidHomQ_injective
    rw [oidHomQ_comp, oidHomQ_id, RelFun.id_comp]
  assoc f g h := by
    change homBComp h (homBComp g f) = homBComp (homBComp h g) f
    apply oidHomQ_injective
    simp only [oidHomQ_comp]
    exact (RelFun.comp_assoc (oidHomQ _ _ h) (oidHomQ _ _ g)
      (oidHomQ _ _ f)).symm

/-- Definition 16 as a Mathlib functor. -/
noncomputable def oidFunctor : (SetAObj A) ? (SetoidRObj A) where
  obj X := <X.name.idx, oid X.name>
  map f := oidHomQ _ _ f
  map_id X := oidHomQ_id X.name
  map_comp f g := oidHomQ_comp g f

instance : Functor.Faithful (oidFunctor (A := A)) where
  map_injective := by
    intro X Y f g h
    apply oidHomQ_injective X.name Y.name
    exact h

instance : Functor.Full (oidFunctor (A := A)) where
  map_surjective := by
    intro X Y f
    refine <Quotient.mk _
      (relFunToHomName X.name Y.name f), ?_>
    exact oidHom_relFunToHomName X.name Y.name f

end SetAObj

end Scott2026

```

A.9 Scott2026/OidEssential.lean

252 lines.

Lean 4 source

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.

```



```

Authors: Lars Warren Ericson.
-/

import Mathlib.CategoryTheory.EssentialImage
import Mathlib.CategoryTheory.Equivalence
import Scott2026.SetCategory

/-!
# Essential surjectivity of `Oid`

The paper gives no proof of essential surjectivity. This module reconstructs
the standard proof: well-order an underlying type, code its elements by
distinct well-founded sets, and represent each row of an `A`-valued partial
equivalence relation as a Boolean-valued subset of those discrete codes.
-/

universe u

namespace Scott2026

open AName CategoryTheory

/-- A von Neumann-style `PSet` code for an element of an arbitrary small type,
using Lean's classical global well-order. -/
noncomputable def typePSetCode {X : Type u} : X → PSet.{u} :=
  WellOrderingRel.isWellOrder.wf.fix fun x rec =>
    PSet.mk {y : X // WellOrderingRel y x} (fun y => rec y.1 y.2)

theorem typePSetCode_eq {X : Type u} (x : X) :
  typePSetCode x =
    PSet.mk {y : X // WellOrderingRel y x} (fun y => typePSetCode y.1) := by
  rw [typePSetCode, WellFounded.fix_eq]

theorem typePSetCode_mem {X : Type u} {x y : X}
  (h : WellOrderingRel x y) :
  typePSetCode x in typePSetCode y := by
  rw [typePSetCode_eq y]
  exact PSet.Mem.mk _ (<x, h> : {z : X // WellOrderingRel z y})

theorem typePSetCode_equiv_iff {X : Type u} (x y : X) :
  PSet.Equiv (typePSetCode x) (typePSetCode y) <=> x = y := by
  constructor
  * intro h
    rcases trichotomous (r := WellOrderingRel) x y with hxy | hxy | hyx
    * exact False.elim (PSet.mem_irrefl (typePSetCode y)
      ((PSet.Mem.congr_left h).mp (typePSetCode_mem hxy)))
    * exact hxy
    * exact False.elim (PSet.mem_irrefl (typePSetCode x)
      ((PSet.Mem.congr_left h.symm).mp (typePSetCode_mem hyx)))
  * rintro rfl
    exact PSet.Equiv.refl _

variable {A : Type u} [CompleteBooleanAlgebra A] [Nontrivial A]

/-- Pairwise Boolean-discrete name codes for an arbitrary small type. -/
noncomputable def typeAtom {X : Type u} (x : X) : AName.{u} A :=
  check (A := A) (typePSetCode x)

theorem eqB_typeAtom_eq {X : Type u} {x y : X} (h : x = y) :
  eqB (typeAtom (A := A) x) (typeAtom (A := A) y) = top := by
  subst y
  exact eqB_self _

```

```

theorem eqB_typeAtom_ne {X : Type u} {x y : X} (h : x != y) :
  eqB (typeAtom (A := A) x) (typeAtom (A := A) y) = False :=
  (check_atomic (A := A) _ _).2.1.mpr
  (by rwa [typePSetCode_equiv_iff])

/-- The row `y`  $\mapsto$   $?x = y?$  represented as a subset of discrete atoms. -/
noncomputable def setoidRow {X : Type u} (S : ASetoid (A := A) X)
  (x : X) : AName.{u} A :=
  mk X (typeAtom (A := A)) (fun y => S.eq x y)

theorem memB_typeAtom_setoidRow {X : Type u} (S : ASetoid (A := A) X)
  (x y : X) :
  memB (typeAtom (A := A) y) (setoidRow S x) = S.eq x y := by
  classical
  rw [setoidRow, memB_mk]
  apply le_antisymm
  * refine iSup_le fun z => ?_
    by_cases h : y = z
    * subst z
      rw [eqB_typeAtom_eq (A := A) rfl, top_inf_eq]
    * rw [eqB_typeAtom_ne (A := A) h, bot_inf_eq]
      exact bot_le
  * exact le_iSup_of_le y (by rw [eqB_self, top_inf_eq])

/-- Setoid equality makes the corresponding row names Boolean-equal. -/
theorem le_eqB_setoidRow {X : Type u} (S : ASetoid (A := A) X)
  (x y : X) :
  S.eq x y <= eqB (setoidRow S x) (setoidRow S y) := by
  rw [eqB_eq_subset]
  apply le_inf
  * rw [setoidRow, subsetB_mk]
    refine le_iInf fun z => ?_
    rw [le_himp_iff, memB_typeAtom_setoidRow]
    have h := S.trans y x z
    rwa [S.symm y x] at h
  * rw [setoidRow, subsetB_mk]
    refine le_iInf fun z => ?_
    rw [le_himp_iff, memB_typeAtom_setoidRow]
    exact S.trans x y z

/-- Conversely, row equality on the extent of `x` implies setoid equality. -/
theorem inf_eqB_setoidRow_le {X : Type u} (S : ASetoid (A := A) X)
  (x y : X) :
  S.eps x sqcap eqB (setoidRow S x) (setoidRow S y) <= S.eq x y := by
  have h := subsetB_apply (setoidRow S x) (setoidRow S y) x
  change subsetB (setoidRow S x) (setoidRow S y) sqcap S.eps x <=
    memB (typeAtom (A := A) x) (setoidRow S y) at h
  rw [memB_typeAtom_setoidRow, S.symm y x] at h
  exact h.trans' (le_inf
    (inf_le_right.trans (eqB_le_subsetB _ _)) inf_le_left)

/-- A name realizing an arbitrary `A`-setoid. -/
noncomputable def nameOfSetoid {X : Type u} (S : ASetoid (A := A) X) :
  AName.{u} A :=
  mk X (setoidRow S) S.eps

/-- The extent of a represented row is exactly its original setoid extent. -/
theorem memB_setoidRow_nameOfSetoid {X : Type u}
  (S : ASetoid (A := A) X) (x : X) :
  memB (setoidRow S x) (nameOfSetoid S) = S.eps x := by
  rw [nameOfSetoid, memB_mk]
  apply le_antisymm
  * refine iSup_le fun y => ?_

```

```

have hrow : eqB (setoidRow S x) (setoidRow S y)  sqcap S.eps y <=
  S.eq y x := by
  rw [inf_comm, eqB_comm]
  exact inf_eqB_setoidRow_le S y x
  exact hrow.trans (S.eq_le_eps_right y x)
* exact le_iSup_of_le x (by rw [eqB_self, top_inf_eq])

/-- The `Oid` equality of the representing name is the original `A`-setoid
equality. -/
theorem oid_nameOfSetoid_eq {X : Type u} (S : ASetoid (A := A) X)
  (x y : X) :
  (oid (nameOfSetoid S)).eq x y = S.eq x y := by
  change (memB (setoidRow S x) (nameOfSetoid S)  sqcap
    memB (setoidRow S y) (nameOfSetoid S))  sqcap
    eqB (setoidRow S x) (setoidRow S y) = S.eq x y
  rw [memB_setoidRow_nameOfSetoid, memB_setoidRow_nameOfSetoid]
  apply le_antisymm
  * exact (inf_eqB_setoidRow_le S x y).trans'
    (le_inf (inf_le_left.trans inf_le_left) inf_le_right)
  * exact le_inf
    (le_inf (S.eq_le_eps_left x y) (S.eq_le_eps_right x y))
    (le_eqB_setoidRow S x y)

/-- The representation is a strict isomorphism of `A`-setoids. -/
noncomputable def oidNameOfSetoidStrictIso {X : Type u}
  (S : ASetoid (A := A) X) :
  ASetoid.StrictIso (oid (nameOfSetoid S)) S where
  toFun := id
  invFun := id
  left_inv := fun _ => rfl
  right_inv := fun _ => rfl
  preserve_eq := fun x y => (oid_nameOfSetoid_eq S x y).symm

/-- Equal `A`-setoid structures on one carrier give an isomorphism in
`SetoidR_A`. -/
noncomputable def setoidEqRelIso {X : Type u}
  (S T : ASetoid (A := A) X) (h : forall x y, S.eq x y = T.eq x y) :
  (SetoidRObj.mk X S : SetoidRObj A)  ~  SetoidRObj.mk X T := by
  let hom : RelFun S T :=
    RelFun.ofFunctional S T id (fun x y => (h x y).le)
  let inv : RelFun T S :=
    RelFun.ofFunctional T S id (fun x y => (h x y).ge)
  have hhom (x y : X) : hom.val x y = S.eq x y := by
  change S.eps x  sqcap T.eq x y = S.eq x y
  rw [ <- h x y]
  exact inf_eq_right.mpr (S.eq_le_eps_left x y)
  have hinv (x y : X) : inv.val x y = T.eq x y := by
  change T.eps x  sqcap S.eq x y = T.eq x y
  rw [h x y]
  exact inf_eq_right.mpr (T.eq_le_eps_left x y)
  exact
  { hom := hom
    inv := inv
    hom_inv_id := by
      apply RelFun.ext
      intro x z
      change (bigcup y : X, hom.val x y  sqcap inv.val y z) = S.eq x z
      simp_rw [hhom, hinv, <- h]
      apply le_antisymm
      * exact iSup_le fun y => S.trans x y z
      * exact le_iSup_of_le x
        (le_inf (S.eq_le_eps_left x z) le_rfl)
    inv_hom_id := by

```

```

    apply RelFun.ext
    intro x z
    change ( bigcup y : X, inv.val x y sqcap hom.val y z) = T.eq x z
    simp_rw [hinv, hhom, h]
    apply le_antisymm
    * exact iSup_le fun y => T.trans x y z
    * exact le_iSup_of_le x
      (le_inf (T.eq_le_eps_left x z) le_rfl) }

/-- Every bundled `A`-setoid is isomorphic to the `Oid` of its representing
name. -/
noncomputable def oidNameOfSetoidIso (R : SetoidRObj A) :
  SetoidRObj.mk R.carrier (oid (nameOfSetoid R.setoid)) ~ = R := by
  exact setoidEqRelIso (oid (nameOfSetoid R.setoid)) R.setoid
    (oid_nameOfSetoid_eq R.setoid)

end Scott2026

namespace Scott2026

open AName CategoryTheory

variable {A : Type u} [CompleteBooleanAlgebra A]

/-- The representation theorem for all complete Boolean algebras. In the
degenerate algebra it follows by subsingleton elimination; otherwise it is the
discrete-code construction above. -/
theorem oid_nameOfSetoid_eq_general {X : Type u}
  (S : ASetoid (A := A) X) (x y : X) :
  (oid (nameOfSetoid S)).eq x y = S.eq x y := by
  classical
  by_cases hA : Nontrivial A
  * letI := hA
    exact oid_nameOfSetoid_eq S x y
  * haveI : Subsingleton A := not_nontrivial_iff_subsingleton.mp hA
    exact Subsingleton.elim _ _

/-- Every bundled `A`-setoid is categorically isomorphic to the `Oid` of a
name, including for the degenerate Boolean algebra. -/
noncomputable def oidNameOfSetoidIsoGeneral (R : SetoidRObj A) :
  SetoidRObj.mk R.carrier (oid (nameOfSetoid R.setoid)) ~ = R :=
  setoidEqRelIso (oid (nameOfSetoid R.setoid)) R.setoid
    (oid_nameOfSetoid_eq_general R.setoid)

instance : Functor.EssSurj (SetAObj.oidFunctor (A := A)) where
  mem_essImage := fun R =>
    <SetAObj.mk (nameOfSetoid R.setoid),
    <by
      change SetoidRObj.mk R.carrier (oid (nameOfSetoid R.setoid)) ~ = R
      exact oidNameOfSetoidIsoGeneral R>>

instance : Functor.IsEquivalence (SetAObj.oidFunctor (A := A)) where

/-- Definition 16, categorical conclusion:
`Set_A ? SetoidR_A`. -/
noncomputable def setAEquivSetoidR :
  SetAObj A ? SetoidRObj A :=
  (SetAObj.oidFunctor (A := A)).asEquivalence

end Scott2026

```

A.10 Scott2026/RawPowerStrict.lean

114 lines.

Lean 4 source

```
/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/

import Scott2026.ExtensionalVA

/-!
# Regression test for raw presentation indices

Isolated counterexample: a pre-set that lists `{}` twice admits two different
valuations on `dom(P^A(check Y))` that are Boolean-equal at `top`. This is not a
paper counterexample: `PSet` presentations are implementation details, while
the paper works with extensional ZFC sets. It records why public checked-set
theorems use `checkZF`/`checkExt` rather than raw `check`.
-/

namespace Scott2026

open AName

/-- A pre-set presenting `{}` twice. -/
def psetDupEmpty : PSet.{0} :=
  PSet.mk (ULift Bool) (fun _ => PSet.empty)

/-- Valuation `top` on the first copy of `{}` and `False` on the second. -/
noncomputable def rawPowerTrueFalse :
  (powerB (check (A := Prop) psetDupEmpty)).idx :=
  <fun i => if i.down then top else False, fun _ => le_top>

/-- Valuation `False` on the first copy of `{}` and `top` on the second. -/
noncomputable def rawPowerFalseTrue :
  (powerB (check (A := Prop) psetDupEmpty)).idx :=
  <fun i => if i.down then False else top, fun _ => le_top>

theorem rawPowerTrueFalse_ne :
  rawPowerTrueFalse != rawPowerFalseTrue := by
  intro h
  have := congrFun (congrArg Subtype.val h) <true>
  simp [rawPowerTrueFalse, rawPowerFalseTrue] at this

theorem check_psetDupEmpty_child
  (i : (check (A := Prop) psetDupEmpty).idx) :
  (check (A := Prop) psetDupEmpty).child i =
    check (A := Prop) PSet.empty :=
  rfl

theorem memB_child_raw_dup
  (v : (powerB (check (A := Prop) psetDupEmpty)).idx)
  (i : (check (A := Prop) psetDupEmpty).idx) :
  memB ((check (A := Prop) psetDupEmpty).child i)
    ((powerB (check (A := Prop) psetDupEmpty)).child v) =
    bigcup j, v.1 j := by
  change memB ((check (A := Prop) psetDupEmpty).child i)
    (mk (check (A := Prop) psetDupEmpty).idx
      (check (A := Prop) psetDupEmpty).child v.1) =
    bigcup j, v.1 j
```

```

rw [memB_mk]
refine iSup_congr fun j => ?_
rw [check_psetDupEmpty_child, check_psetDupEmpty_child, eqB_self, top_inf_eq]

theorem memB_child_raw_dup_top
  {v : (powerB (check (A := Prop) psetDupEmpty)).idx}
  (hv : v.1 <true> sqsup v.1 <false> = top) :
  (i : (check (A := Prop) psetDupEmpty).idx) :
  memB ((check (A := Prop) psetDupEmpty).child i)
    ((powerB (check (A := Prop) psetDupEmpty)).child v) = top := by
  rw [memB_child_raw_dup]
  refine top_unique ?_
  rw [← hv]
  exact sup_le (le_iSup (fun j => v.1 j) <true>) (le_iSup (fun j => v.1 j) <false>)

theorem subsetB_raw_dup
  (v w : (powerB (check (A := Prop) psetDupEmpty)).idx)
  (hw : w.1 <true> sqsup w.1 <false> = top) :
  subsetB ((powerB (check (A := Prop) psetDupEmpty)).child v)
    ((powerB (check (A := Prop) psetDupEmpty)).child w) = top := by
  change subsetB
  (mk (check (A := Prop) psetDupEmpty).idx
    (check (A := Prop) psetDupEmpty).child v.1)
    ((powerB (check (A := Prop) psetDupEmpty)).child w) = top
  rw [subsetB_mk]
  refine iInf_eq_top.mpr fun i => himp_eq_top_iff.mpr ?_
  rw [memB_child_raw_dup_top hw]
  exact le_top

theorem eqB_raw_dup :
  eqB ((powerB (check (A := Prop) psetDupEmpty)).child rawPowerTrueFalse)
    ((powerB (check (A := Prop) psetDupEmpty)).child rawPowerFalseTrue) = top := by
  have h_1 : rawPowerTrueFalse.1 <true> sqsup rawPowerTrueFalse.1 <false> = top := by
    simp [rawPowerTrueFalse]
  have h_2 : rawPowerFalseTrue.1 <true> sqsup rawPowerFalseTrue.1 <false> = top := by
    simp [rawPowerFalseTrue]
  rw [eqB_eq_subset, subsetB_raw_dup rawPowerTrueFalse rawPowerFalseTrue h_2,
    subsetB_raw_dup rawPowerFalseTrue rawPowerTrueFalse h_1, inf_top_eq]

/-- Raw index-level strictness fails: duplicate children of a `PSet` give two
    distinct valuations that are Boolean-equal at `top`. -/
theorem oid_powerB_not_strict :
  not (oid (powerB (check (A := Prop) psetDupEmpty))).IsStrict := by
  intro hstrict
  exact rawPowerTrueFalse_ne
    (hstrict rawPowerTrueFalse rawPowerFalseTrue (by
      rw [oid_eq_powerB]
      exact eqB_raw_dup))

/-- The extensional checked presentation removes precisely the duplicate-key
    artifact exercised by this regression test. -/
theorem oid_powerB_checkExt_psetDupEmpty_strict :
  (oid (powerB (checkExt (A := Prop) psetDupEmpty))).IsStrict :=
  oid_powerB_checkExt_isStrict psetDupEmpty

end Scott2026

```

A.11 Scott2026/VA.lean

3809 lines.

[Lean 4 source \(lines 1–400\)](#)

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/

import Mathlib.Data.Multiset.DershowitzManna
import Mathlib.Logic.Pairwise
import Mathlib.Order.CompleteBooleanAlgebra
import Mathlib.Order.Heyting.Basic
import Mathlib.Order.Zorn
import Mathlib.SetTheory.Cardinal.Order
import Mathlib.SetTheory.Ordinal.Family
import Mathlib.SetTheory.ZFC.PSet
import Scott2026.BooleanLogic

/-!
# The Boolean-valued universe  $V^A$ 

Furber-Mardare-Panangaden-Scott, CSL 2026, S2, and Jech, Set Theory (2003),
Chapter 14: names, Boolean values of membership and equality, the substitution
laws (Lemma 14.16), mixing (14.18), fullness (14.19 = CSL Theorem 1(iii)), and
 $\Delta_0$  invariance (14.21 = CSL Theorem 2).

An  $A$ -name is a well-founded tree of pairs  $(\text{child}, \text{Boolean value})$ , the
standard encoding of Jech's  $V^B$  (display (14.15)).
-/

universe u

namespace Scott2026

/-- An  $A$ -name: a function from a small index type into  $V^A \times A$ . -/
inductive AName (A : Type u) : Type (u + 1)
| mk (a : Type u) (child : a → AName A) (val : a → A) : AName A

namespace AName

variable {A : Type u}

/-- Index type of a name (Jech: domain). -/
def idx : AName.{u} A → Type u
| mk a _ _ => a

/-- Children of a name. -/
def child : (x : AName.{u} A) → x.idx → AName.{u} A
| mk _ f _ => f

/-- Boolean membership degrees of the children. -/
def val : (x : AName.{u} A) → x.idx → A
| mk _ _ v => v

@[simp] theorem idx_mk (a : Type u) (f : a → AName A) (v : a → A) :
  (mk a f v).idx = a := rfl
@[simp] theorem child_mk (a : Type u) (f : a → AName A) (v : a → A) :
  (mk a f v).child = f := rfl
@[simp] theorem val_mk (a : Type u) (f : a → AName A) (v : a → A) :
  (mk a f v).val = v := rfl

/-- Jech rank  $\text{rank}(x)$ : least strict upper bound of the ranks of the children. -/
noncomputable def rank : AName.{u} A → Ordinal.{u}
| mk a f _ => bigcup i : a, rank (f i) + 1

```

```

theorem rank_mk (a : Type u) (f : a -> AName A) (v : a -> A) :
  rank (mk a f v) = bigcup i : a, rank (f i) + 1 :=
  rfl

theorem rank_child_lt (x : AName.{u} A) (i : x.idx) : rank (x.child i) < rank x := by
  cases x with
  | mk a f v =>
    exact Ordinal.lt_iSup_add_one (fun j : a => rank (f j)) i

/-- Lex measure `(?(x) sqsup ?(y), ?(x), ?(y))` used to define `?` in `?` and `?=?`. -/
noncomputable def meas (x y : AName.{u} A) : Ordinal.{u} x Ordinal.{u} x Ordinal.{u} :=
  (rank x sqsup rank y, rank x, rank y)

def measLt : Ordinal.{u} x Ordinal.{u} x Ordinal.{u} ->
  Ordinal.{u} x Ordinal.{u} x Ordinal.{u} -> Prop :=
  Prod.Lex (* < *) (Prod.Lex (* < *) (* < *))

theorem measLt_of_rank_left {x x' y : AName.{u} A} (h : rank x' < rank x) :
  measLt (meas x' y) (meas x y) := by
  dsimp [measLt, meas]
  rcases lt_or_eq_of_le (sup_le_sup_right h.le (rank y)) with hlt | heq
  * exact Prod.Lex.left _ _ hlt
  * rw [heq]
    exact Prod.Lex.right _ (Prod.Lex.left _ _ h)

theorem measLt_of_rank_right {x y y' : AName.{u} A} (h : rank y' < rank y) :
  measLt (meas x y') (meas x y) := by
  dsimp [measLt, meas]
  rcases lt_or_ge (rank x) (rank y) with hxy | hyx
  * have : rank x sqsup rank y' < rank x sqsup rank y := by
    rw [sup_eq_right.mpr hxy.le]
    exact max_lt hxy h
  * exact Prod.Lex.left _ _ this
  * have hmeq : rank x sqsup rank y' = rank x sqsup rank y := by
    rw [sup_eq_left.mpr hyx, sup_eq_left.mpr (h.le.trans hyx)]
    rw [hmeq]
    exact Prod.Lex.right _ (Prod.Lex.right _ h)

/-- From `eqB x y`, one recursive call is `memB (child y) x` (arguments swapped). -/
theorem measLt_of_rank_swap {x y y' : AName.{u} A} (h : rank y' < rank y) :
  measLt (meas y' x) (meas x y) := by
  dsimp [measLt, meas]
  rcases lt_or_ge (rank x) (rank y) with hxy | hyx
  * have : rank y' sqsup rank x < rank x sqsup rank y := by
    rw [sup_comm (rank x), sup_eq_left.mpr hxy.le]
    exact max_lt h hxy
  * exact Prod.Lex.left _ _ this
  * have hmeq : rank y' sqsup rank x = rank x sqsup rank y := by
    rw [sup_eq_right.mpr (h.le.trans hyx), sup_eq_left.mpr hxy]
    rw [hmeq]
    exact Prod.Lex.right _ (Prod.Lex.left _ _ (h.trans_le hyx))

-- Boolean values of membership and equality, Jech (14.16).
mutual
  /-- Boolean value of membership. -/
  noncomputable def memB [CompleteBooleanAlgebra A] : AName.{u} A -> AName.{u} A -> A
  | x, mk _ g b => bigcup j, eqB x (g j) sqcap b j
  termination_by x y => meas x y
  decreasing_by
    exact measLt_of_rank_right (rank_child_lt (mk _ g b) j)

  /-- Boolean value of equality. -/
  noncomputable def eqB [CompleteBooleanAlgebra A] : AName.{u} A -> AName.{u} A -> A

```



```

    | mk _ f a, mk _ g b =>
      (? i, a i ? memB (f i) (mk _ g b)) sqcap (? j, b j ? memB (g j) (mk _ f a))
termination_by x y => meas x y
decreasing_by
  * exact measLt_of_rank_left (rank_child_lt (mk _ f a) i)
  * exact measLt_of_rank_swap (rank_child_lt (mk _ g b) j)
end

variable [CompleteBooleanAlgebra A]

/-- Boolean value of inclusion, Jech (14.16)(ii). -/
noncomputable def subsetB (x y : AName.{u} A) : A :=
  ? i : x.idx, x.val i ? memB (x.child i) y

theorem memB_mk (x : AName.{u} A) {b : Type u} (g : b -> AName A) (b : b -> A) :
  memB x (mk b g b) = bigcup j, eqB x (g j) sqcap b j := by
  rw [memB]

theorem eqB_mk {a b : Type u} (f : a -> AName A) (a : a -> A) (g : b -> AName A) (b : b
-> A) :
  eqB (mk a f a) (mk b g b) =
    (? i, a i ? memB (f i) (mk b g b)) sqcap (? j, b j ? memB (g j) (mk a f a)) := by
  rw [eqB]

theorem subsetB_mk {a : Type u} (f : a -> AName A) (a : a -> A) (y : AName.{u} A) :
  subsetB (mk a f a) y = ? i, a i ? memB (f i) y :=
  rfl

theorem eqB_eq_subset (x y : AName.{u} A) : eqB x y = subsetB x y sqcap subsetB y x := by
  cases x with
  | mk a f a =>
    cases y with
    | mk b g b =>
      rw [eqB_mk, subsetB_mk, subsetB_mk]

theorem eqB_comm (x y : AName.{u} A) : eqB x y = eqB y x := by
  rw [eqB_eq_subset, eqB_eq_subset, inf_comm]

/-- Jech Lemma 14.15: equality is reflexive with Boolean value 1. -/
theorem eqB_self (x : AName.{u} A) : eqB x x = top := by
  induction x with
  | mk a f a ih =>
    have hmem (i : a) : a i <= memB (f i) (mk a f a) := by
      rw [memB_mk]
    calc
      a i = eqB (f i) (f i) sqcap a i := by rw [ih i, top_inf_eq]
      _ <= bigcup j, eqB (f i) (f j) sqcap a j := le_iSup (fun j : a => eqB (f i) (f j)
sqcap a j) i
    have htop : (? i : a, a i ? memB (f i) (mk a f a)) = top := by
      refine iInf_eq_top.mpr fun i => himp_eq_top_iff.mpr (hmem i)
    rw [eqB_mk, htop, inf_top_eq]

/-- `x(t) <= ?t in x?` for `t in dom(x)`. -/
theorem val_le_memB (x : AName.{u} A) (i : x.idx) :
  x.val i <= memB (x.child i) x := by
  cases x with
  | mk a f a =>
    rw [memB_mk]
  calc
    a i = eqB (f i) (f i) sqcap a i := by rw [eqB_self (f i), top_inf_eq]
    _ <= bigcup j, eqB (f i) (f j) sqcap a j := le_iSup (fun j : a => eqB (f i) (f j)
sqcap a j) i

```

```

theorem memB_eq (x y : AName.{u} A) :
  memB x y = bigcup j : y.idx, eqB x (y.child j) sqcap y.val j := by
  cases y with
  | mk b g b =>
    rw [memB_mk]
    rfl

theorem eqB_le_subsetB (x y : AName.{u} A) : eqB x y <= subsetB x y := by
  rw [eqB_eq_subset]; exact inf_le_left

theorem subsetB_apply (x y : AName.{u} A) (i : x.idx) :
  subsetB x y sqcap x.val i <= memB (x.child i) y :=
  le_himp_iff.mp (iInf_le _ i)

/-- Three-element multiset `{a, b, c}` as iterated `cons`. -/
def mset3 (a b c : Ordinal.{u}) : Multiset Ordinal.{u} :=
  a ::? b ::? {c}

theorem mset3_swap12 (a b c : Ordinal.{u}) : mset3 a b c = mset3 b a c :=
  Multiset.cons_swap a b {c}

theorem mset3_swap23 (a b c : Ordinal.{u}) : mset3 a b c = mset3 a c b :=
  congrArg (fun s => a ::? s) (Multiset.cons_swap b c 0)

theorem mset3_swap13 (a b c : Ordinal.{u}) : mset3 a b c = mset3 c b a := by
  rw [mset3_swap23 a b c, mset3_swap12 a c b, mset3_swap23 c a b]

/-- Replacing the first rank by a strictly smaller one decreases the DM order. -/
theorem dm_replace_left {a a' b c : Ordinal.{u}} (h : a' < a) :
  Multiset.IsDershowitzMannaLT (mset3 a' b c) (mset3 a b c) :=
  <b ::? {c}, {a'}, {a}, Multiset.singleton_ne_zero a,
  by rw [add_comm, Multiset.singleton_add]; rfl,
  by rw [add_comm, Multiset.singleton_add]; rfl,
  by simp [h]>

omit [CompleteBooleanAlgebra A] in
theorem ranks_lt_replace_x (x y z : AName.{u} A) (i : x.idx) :
  Multiset.IsDershowitzMannaLT
    (mset3 (rank y) (rank (x.child i)) (rank z))
    (mset3 (rank x) (rank y) (rank z)) := by
  rw [mset3_swap12 (rank y) (rank (x.child i)) (rank z)]
  exact dm_replace_left (rank_child_lt x i)

omit [CompleteBooleanAlgebra A] in
theorem ranks_lt_replace_z (x y z : AName.{u} A) (k : z.idx) :
  Multiset.IsDershowitzMannaLT
    (mset3 (rank y) (rank (z.child k)) (rank x))
    (mset3 (rank x) (rank y) (rank z)) := by
  rw [mset3_swap12 (rank y) (rank (z.child k)) (rank x),
    mset3_swap13 (rank x) (rank y) (rank z)]
  exact dm_replace_left (rank_child_lt z k)

omit [CompleteBooleanAlgebra A] in
theorem ranks_lt_replace_y (x y z : AName.{u} A) (j : y.idx) :
  Multiset.IsDershowitzMannaLT
    (mset3 (rank z) (rank x) (rank (y.child j)))
    (mset3 (rank x) (rank y) (rank z)) := by
  rw [mset3_swap13 (rank z) (rank x) (rank (y.child j)),
    mset3_swap12 (rank x) (rank y) (rank z)]
  exact dm_replace_left (rank_child_lt y j)

omit [CompleteBooleanAlgebra A] in
theorem ranks_lt_replace_x_right (x y z : AName.{u} A) (i : x.idx) :

```

```

Multiset.IsDershowitzMannaLT
  (mset3 (rank (x.child i)) (rank z) (rank y))
  (mset3 (rank x) (rank y) (rank z)) := by
rw [mset3_swap23 (rank x) (rank y) (rank z)]
exact dm_replace_left (rank_child_lt x i)

/-- Jech Lemma 14.16: transitivity of equality and substitution into membership. -/
theorem model_laws (x y z : AName.{u} A) :
  (eqB x y sqcap eqB y z <= eqB x z) /\
  (memB x y sqcap eqB x z <= memB z y) /\
  (memB y x sqcap eqB x z <= memB y z) := by
let meas3 (p : AName A x AName A x AName A) : Multiset Ordinal :=
  mset3 (rank p.1) (rank p.2.1) (rank p.2.2)
let R : AName A x AName A x AName A -> AName A x AName A x AName A -> Prop :=
  InvImage Multiset.IsDershowitzMannaLT meas3
have hwf : WellFounded R := InvImage.wf meas3 Multiset.wellFounded_isDershowitzMannaLT
refine hwf.induction
  (C := fun p =>
    eqB p.1 p.2.1 sqcap eqB p.2.1 p.2.2 <= eqB p.1 p.2.2 /\
    memB p.1 p.2.1 sqcap eqB p.1 p.2.2 <= memB p.2.2 p.2.1 /\
    memB p.2.1 p.1 sqcap eqB p.1 p.2.2 <= memB p.2.1 p.2.2)
  (x, y, z) fun p ih => ?_
rcases p with <x, y, z>
have ih' (x' y' z' : AName A)
  (h : Multiset.IsDershowitzMannaLT
    (mset3 (rank x') (rank y') (rank z'))
    (mset3 (rank x) (rank y) (rank z))) :
  (eqB x' y' sqcap eqB y' z' <= eqB x' z') /\
  (memB x' y' sqcap eqB x' z' <= memB z' y') /\
  (memB y' x' sqcap eqB x' z' <= memB y' z') :=
  ih (x', y', z') h
refine <?eq_trans, ?mem_left, ?mem_right>
* rw [eqB_eq_subset (x := x) (y := y), eqB_eq_subset (x := y) (y := z),
  eqB_eq_subset (x := x) (y := z)]
refine le_inf ?xz ?zx
* refine le_iInf fun i => ?_
  rw [le_himp_iff]
  have hlaw := (ih' y (x.child i) z (ranks_lt_replace_x x y z i)).2.2
  refine le_trans ?_ hlaw
  refine le_inf ?_ ?_
  * refine (inf_le_inf_right (x.val i) ?_).trans (subsetB_apply x y i)
    exact inf_le_of_left_le inf_le_left
  * rw [eqB_eq_subset]
    exact inf_le_of_left_le inf_le_right
* refine le_iInf fun k => ?_
  rw [le_himp_iff]
  have hlaw := (ih' y (z.child k) x (ranks_lt_replace_z x y z k)).2.2
  refine le_trans ?_ hlaw
  refine le_inf ?_ ?_
  * refine (inf_le_inf_right (z.val k) ?_).trans (subsetB_apply z y k)
    exact inf_le_of_right_le (inf_le_right (a := subsetB y z) (b := subsetB z y))
  * rw [eqB_eq_subset, inf_comm (a := subsetB y x)]
    exact inf_le_of_left_le inf_le_left
* rw [memB_eq (x := x) (y := y), memB_eq (x := z) (y := y)]
  rw [iSup_inf_eq (f := fun j : y.idx => (eqB x (y.child j) sqcap y.val j : A))
    (a := (eqB x z : A))]
  refine iSup_le fun j => ?_
  have hlaw := (ih' z x (y.child j) (ranks_lt_replace_y x y z j)).1
  refine le_trans ?_ (le_iSup (fun j' : y.idx => (eqB z (y.child j') sqcap y.val j' : A)) j
  )
  refine le_inf ?_ ?_
  * refine le_trans ?_ hlaw
    rw [eqB_comm (x := z) (y := x)]

```

```

    refine le_trans (inf_le_inf_right (eqB x z : A) inf_le_left)
      (inf_comm (a := eqB x (y.child j)) (b := eqB x z)).le
  * exact inf_le_of_left_le inf_le_right
* rw [memB_eq (x := y) (y := x)]
  rw [iSup_inf_eq (f := fun i : x.idx => (eqB y (x.child i) sqcap x.val i : A))
    (a := (eqB x z : A))]
  refine iSup_le fun i => ?_
  have hsub : (eqB x z : A) sqcap x.val i <= memB (x.child i) z :=
    (inf_le_inf_right (x.val i) (eqB_le_subsetB x z)).trans (subsetB_apply x z i)
  have hlaw := (ih' (x.child i) z y (ranks_lt_replace_x_right x y z i)).2.1
  refine le_trans ?_ hlaw
  refine le_inf ?_ ?_
  * refine le_trans ?_ hsub
    exact le_inf inf_le_right (inf_le_of_left_le inf_le_right)
  * rw [eqB_comm (x := x.child i) (y := y)]
    exact inf_le_of_left_le inf_le_left

theorem eqB_trans (x y z : AName.{u} A) : eqB x y sqcap eqB y z <= eqB x z :=
  (model_laws x y z).1

theorem memB_eqB_left (x y z : AName.{u} A) : memB x y sqcap eqB x z <= memB z y :=
  (model_laws x y z).2.1

theorem memB_eqB_right (x y z : AName.{u} A) : memB y x sqcap eqB x z <= memB y z :=
  (model_laws x y z).2.2

/-- Jech Lemma 14.18: mix of an antichain of names. -/
noncomputable def mix {? : Type u} (u : ? -> A) (xs : ? -> AName.{u} A) : AName.{u} A :=
  mk (Sigma i : ?, (xs i).idx)
    (fun p => (xs p.1).child p.2)
    (fun p => u p.1 sqcap (xs p.1).val p.2)

theorem mix_le_eqB {? : Type u} (u : ? -> A) (xs : ? -> AName.{u} A)
  (hdis : Pairwise fun i j => u i sqcap u j = False) (i : ?) :
  u i <= eqB (mix u xs) (xs i) := by
  rw [eqB_eq_subset]
  refine le_inf ?le_mix ?mix_le
  * refine le_iInf fun p => ?_
    rw [le_himp_iff]
    rcases p with <j, t>
    by_cases hij : i = j
    * subst hij
      have hval : (mix u xs).val <i, t> = u i sqcap (xs i).val t := rfl
      rw [hval]
      exact (inf_le_of_right_le inf_le_right).trans (val_le_memB (xs i) t)
    * have : u i sqcap u j = False := hdis hij
      have : u i sqcap (u j sqcap (xs j).val t) = False := by
        rw [← inf_assoc, this, bot_inf_eq]
      exact this.le.trans bot_le
  * refine le_iInf fun t => ?_
    rw [le_himp_iff]
    have : u i sqcap (xs i).val t <=
      eqB ((xs i).child t) ((xs i).child t) sqcap (u i sqcap (xs i).val t) := by
      rw [eqB_self]; exact le_inf le_top le_rfl
    refine this.trans ?_
    rw [memB_eq]
    exact le_iSup_of_le <i, t> le_rfl

/-- Canonical name of a pre-set (Jech Definition 14.20). -/
noncomputable def check : PSet.{u} -> AName.{u} A
  | <a, f> => mk a (fun i => check (f i)) (fun _ => top )

theorem check_mk (a : Type u) (f : a -> PSet.{u}) :

```

```

    check (A := A) (PSet.mk a f) = mk a (fun i => check (f i)) (fun _ => top) :=
rfl

theorem check_val (x : PSet.{u}) (i : (check (A := A) x).idx) :
  (check x).val i = top := by
  cases x; rfl

end AName

open AName

/-- `Delta_0` formulas with `n` free variables (bounded quantifiers only). -/
inductive DOFormula : Nat -> Type
| mem {n} (i j : Fin n) : DOFormula n
| eq {n} (i j : Fin n) : DOFormula n
| not {n} : DOFormula n -> DOFormula n
| and {n} : DOFormula n -> DOFormula n -> DOFormula n
| bExists {n} (bound : Fin n) : DOFormula (n + 1) -> DOFormula n
| bForall {n} (bound : Fin n) : DOFormula (n + 1) -> DOFormula n

namespace DOFormula

/-- `Fin.cons` on pre-sets, with a constant motive. -/
def consPSet {n : Nat} (x : PSet.{u}) (? : Fin n -> PSet.{u}) :
  Fin (n + 1) -> PSet.{u} :=
  Fin.cons (a := fun _ : Fin (n + 1) => PSet.{u}) x ?

```

Lean 4 source (lines 401–800)

```

@[simp] theorem consPSet_zero {n : Nat} (x : PSet.{u}) (? : Fin n -> PSet.{u}) :
  consPSet x ? 0 = x := by simp [consPSet]
@[simp] theorem consPSet_succ {n : Nat} (x : PSet.{u}) (? : Fin n -> PSet.{u})
  (i : Fin n) : consPSet x ? i.succ = ? i := by simp [consPSet]

/-- Classical satisfaction of a `Delta_0` formula in `PSet`. -/
def realize : forall {n}, DOFormula n -> (Fin n -> PSet.{u}) -> Prop
| _, .mem i j, ? => ? i in ? j
| _, .eq i j, ? => PSet.Equiv (? i) (? j)
| _, .not phi, ? => not realize phi ?
| _, .and phi psi, ? => realize phi ? /\ realize psi ?
| _, .bExists k phi, ? => exists y, y in ? k /\ realize phi (consPSet y ?)
| _, .bForall k phi, ? => forall y, y in ? k -> realize phi (consPSet y ?)

variable {A : Type u} [CompleteBooleanAlgebra A]

/-- `Fin.cons` on names, with a constant motive so both sides stay `AName`. -/
def consName {n : Nat} (x : AName.{u} A) (? : Fin n -> AName.{u} A) :
  Fin (n + 1) -> AName.{u} A :=
  Fin.cons (a := fun _ : Fin (n + 1) => AName.{u} A) x ?

omit [CompleteBooleanAlgebra A] in
@[simp] theorem consName_zero {n : Nat} (x : AName.{u} A) (? : Fin n -> AName.{u} A) :
  consName x ? 0 = x := by
  simp [consName]
omit [CompleteBooleanAlgebra A] in
@[simp] theorem consName_succ {n : Nat} (x : AName.{u} A) (? : Fin n -> AName.{u} A)
  (i : Fin n) : consName x ? i.succ = ? i := by
  simp [consName]

/-- Boolean value of a `Delta_0` formula at an `A`-name assignment. -/
noncomputable def bval : forall {n}, DOFormula n -> (Fin n -> AName.{u} A) -> A
| _, .mem i j, ? => memB (? i) (? j)
| _, .eq i j, ? => eqB (? i) (? j)

```

```

| _, .not phi, ? => (bval phi ?)?
| _, .and phi psi, ? => bval phi ? sqcap bval psi ?
| _, .bExists k phi, ? => bigcup y : AName.{u} A, memB y (? k) sqcap bval phi (consName y
?)
| _, .bForall k phi, ? => ? y : AName.{u} A, memB y (? k) ? bval phi (consName y ?)

@[simp] theorem bval_not {n} (phi : DOFormula n) (? : Fin n -> AName.{u} A) :
  bval (not phi) ? = (bval phi ?)? := rfl
@[simp] theorem bval_and {n} (phi psi : DOFormula n) (? : Fin n -> AName.{u} A) :
  bval (and phi psi) ? = bval phi ? sqcap bval psi ? := rfl
@[simp] theorem bval_bExists {n} (k : Fin n) (phi : DOFormula (n + 1))
  (? : Fin n -> AName.{u} A) :
  bval (bExists k phi) ? = bigcup y : AName.{u} A, memB y (? k) sqcap bval phi (consName
y ?) :=
  rfl
@[simp] theorem bval_bForall {n} (k : Fin n) (phi : DOFormula (n + 1))
  (? : Fin n -> AName.{u} A) :
  bval (bForall k phi) ? = ? y : AName.{u} A, memB y (? k) ? bval phi (consName y ?) :=
  rfl

theorem iInf_fin_succ {n : Nat} (f : Fin (n + 1) -> A) :
  (? i, f i) = f 0 sqcap ? i : Fin n, f i.succ := by
  refine le_antisymm (le_inf (iInf_le _ 0) (le_iInf fun i => iInf_le _ i.succ)) ?_
  refine le_iInf fun i => Fin.cases inf_le_left
    (fun i => inf_le_of_right_le (iInf_le _ i)) i

theorem eqB_iInf_cons {n : Nat} (y : AName.{u} A) (? sigma : Fin n -> AName.{u} A) :
  (? i, eqB (consName y ? i) (consName y sigma i)) = ? i, eqB (? i) (sigma i) := by
  rw [iInf_fin_succ (fun i => eqB (consName y ? i) (consName y sigma i))]
  simp [eqB_self]

theorem inf_compl_le_compl_iff {a b c : A} : a sqcap b? <= c? <-> a sqcap c <= b :=
  by
  rw [le_compl_iff_disjoint_right, disjoint_iff, inf_right_comm, <- disjoint_iff,
    disjoint_compl_right_iff]

/-- Equality of names is a congruence for Boolean values of `Delta_0` formulas. -/
theorem bval_congr {n : Nat} (phi : DOFormula n) (? sigma : Fin n -> AName.{u} A) :
  (? i, eqB (? i) (sigma i)) sqcap bval phi ? <= bval phi sigma := by
  induction phi with
  | mem i j =>
    have hij : (? k, eqB (? k) (sigma k)) <= eqB (? i) (sigma i) sqcap eqB (? j) (sigma j)
    :=
      le_inf (iInf_le _ i) (iInf_le _ j)
    refine (inf_le_inf_right (memB (? i) (? j)) hij).trans ?_
    have h_1 : eqB (? i) (sigma i) sqcap memB (? i) (? j) <= memB (sigma i) (? j) := by
      rw [inf_comm]; exact memB_eqB_left (? i) (? j) (sigma i)
    have h_2 : memB (sigma i) (? j) sqcap eqB (? j) (sigma j) <= memB (sigma i) (sigma j)
    :=
      memB_eqB_right (? j) (sigma i) (sigma j)
    refine le_trans ?_ h_2
    refine le_inf ?_ ?_
    * refine le_trans ?_ h_1
      exact le_inf (inf_le_of_left_le inf_le_left) inf_le_right
    * exact inf_le_of_left_le inf_le_right
  | eq i j =>
    have hij : (? k, eqB (? k) (sigma k)) <= eqB (? i) (sigma i) sqcap eqB (? j) (sigma j)
    :=
      le_inf (iInf_le _ i) (iInf_le _ j)
    refine (inf_le_inf_right (eqB (? i) (? j)) hij).trans ?_
    have h_1 : eqB (sigma i) (? i) sqcap eqB (? i) (? j) <= eqB (sigma i) (? j) :=
      eqB_trans (sigma i) (? i) (? j)
    have h_2 : eqB (sigma i) (? j) sqcap eqB (? j) (sigma j) <= eqB (sigma i) (sigma j) :=

```

```

    eqB_trans (sigma i) (? j) (sigma j)
  refine le_trans ?_ h_2
  refine le_inf ?_ ?_
  * refine le_trans ?_ h_1
    rw [eqB_comm (x := ? i) (y := sigma i)]
    exact le_inf (inf_le_of_left_le inf_le_left) inf_le_right
  * exact inf_le_of_left_le inf_le_right
| not phi ih =>
  rw [bval_not, bval_not, inf_compl_le_compl_iff]
  have hcomm : (? i, eqB (sigma i) (? i)) = ? i, eqB (? i) (sigma i) :=
    iInf_congr fun i => eqB_comm (sigma i) (? i)
  simp [hcomm] using ih sigma ?
| and phi psi ihphi ihpsi =>
  rw [bval_and, bval_and]
  refine le_inf ?_ ?_
  * exact (inf_le_inf_left _ inf_le_left).trans (ihphi ? sigma)
  * exact (inf_le_inf_left _ inf_le_right).trans (ihpsi ? sigma)
| bExists k phi ih =>
  rw [bval_bExists, bval_bExists,
    inf_iSup_eq (a := (? i, eqB (? i) (sigma i) : A))]
  refine iSup_le fun y => ?_
  refine le_trans ?_ (le_iSup
    (fun y' : AName A => (memB y' (sigma k) sqcap bval phi (consName y' sigma) : A)) y)
  refine le_inf ?_ ?_
  * have hmem : memB y (? k) sqcap eqB (? k) (sigma k) <= memB y (sigma k) :=
    memB_eqB_right (? k) y (sigma k)
    refine le_trans ?_ hmem
    refine le_inf (inf_le_of_right_le inf_le_left) ?_
    exact inf_le_of_left_le (iInf_le _ k)
  * have hcons := eqB_iInf_cons y ? sigma
    have := ih (consName y ?) (consName y sigma)
    refine le_trans ?_ this
    rw [← hcons]
    exact le_inf inf_le_left (inf_le_of_right_le inf_le_right)
| bForall k phi ih =>
  rw [bval_bForall, bval_bForall]
  refine le_iInf fun y => ?_
  rw [le_himp_iff]
  have hcons := eqB_iInf_cons y ? sigma
  have hmem : (? i, eqB (? i) (sigma i)) sqcap memB y (sigma k) <= memB y (? k) := by
    have := memB_eqB_right (sigma k) y (? k)
    refine le_trans ?_ this
    refine le_inf inf_le_right ?_
    rw [eqB_comm (x := sigma k) (y := ? k)]
    exact inf_le_of_left_le (iInf_le _ k)
  have hto_body :
    (? i, eqB (? i) (sigma i)) sqcap
    (? y', memB y' (? k) ? bval phi (consName y' ?)) sqcap memB y (sigma k) <=
    bval phi (consName y ?) := by
    have hmp : (? y', memB y' (? k) ? bval phi (consName y' ?)) sqcap memB y (? k) <=
      bval phi (consName y ?) :=
      le_himp_iff.mp (iInf_le _ y)
    refine le_trans ?_ hmp
    refine le_inf (inf_le_of_left_le inf_le_right) ?_
    exact (inf_le_inf_right (memB y (sigma k)) inf_le_left).trans hmem
  have := ih (consName y ?) (consName y sigma)
  refine le_trans ?_ this
  refine le_inf ?_ hto_body
  rw [← hcons]
  exact inf_le_of_left_le inf_le_left

```

```

/-- Substitution of equal names into the first free variable. -/
theorem bval_subst {n : Nat} (phi : DOfFormula (n + 1)) (x y : AName.{u} A)

```

```

    (? : Fin n -> AName.{u} A) :
    eqB x y sqcap bval phi (consName x ?) <= bval phi (consName y ?) := by
    have h := bval_congr phi (consName x ?) (consName y ?)
    have hcons : (? i, eqB (consName x ? i) (consName y ? i)) = eqB x y := by
      rw [iInf_fin_succ (fun i => eqB (consName x ? i) (consName y ? i))]
      simp [eqB_self]
    rwa [hcons] at h

theorem check_cons {n : Nat} (x : PSet.{u}) (? : Fin n -> PSet.{u}) :
  consName (check (A := A) x) (fun i => check (? i)) =
    fun i => check (consPSet x ? i) := by
  ext i
  refine Fin.cases ?_ ?_ i
  * simp [consName, consPSet]
  * intro i
    simp [consName, consPSet]

end DOFormula

open DOFormula

variable {A : Type u} [CompleteBooleanAlgebra A]

/-- Jech Lemma 14.19 / CSL Theorem 1(iii): fullness, for a congruent predicate. -/
theorem fullness (phi : AName.{u} A -> A)
  (hcongr : forall x y, eqB x y sqcap phi x <= phi y) :
  exists a, phi a = bigcup x, phi x := by
  classical
  let D : Set A := {u | exists a, u <= phi a}
  let S : Set (Set A) :=
    {W | W subseq D /\ Set.Pairwise W fun a b => a sqcap b = False}
  have hunion (c : Set (Set A)) (hcS : c subseq S) (hchain : IsChain (* subseq *) c) :
    ?_0 c in S /\ forall s in c, s subseq ?_0 c := by
    refine <<?_, ?_>, fun _ => Set.subset_sUnion_of_mem>
  * intro u hu
    obtain <W, hWc, huW> := hu
    exact (hcS hWc).1 huW
  * intro a ha b hb hab
    obtain <W_1, hW_1c, haW> := ha
    obtain <W_2, hW_2c, hbW> := hb
    rcases eq_or_ne W_1 W_2 with hW | hW
  * subst hW
    exact (hcS hW_1c).2 haW hbW hab
  * rcases hchain hW_1c hW_2c hW with h | h
    * exact (hcS hW_2c).2 (h haW) hbW hab
    * exact (hcS hW_1c).2 haW (h hbW) hab
  obtain <W, hWmax> := zorn_subset S fun c hcS hchain =>
    <?_0 c, (hunion c hcS hchain).1, (hunion c hcS hchain).2>
  have hWS : W in S := hWmax.1
  have hWD : W subseq D := hWS.1
  have hWpair : Set.Pairwise W fun a b => a sqcap b = False := hWS.2
  let au : W -> AName.{u} A := fun u => Classical.choose (hWD u.property)
  have hau : forall u : W, (u : A) <= phi (au u) :=
    fun u => Classical.choose_spec (hWD u.property)
  have hdis : Pairwise fun (i j : W) => (i : A) sqcap (j : A) = False := by
    intro i j hij
    exact hWpair i.property j.property (Subtype.coe_ne_coe.mpr hij)
  let a : AName.{u} A := mix (fun u : W => (u : A)) au
  have hmix (u : W) : (u : A) <= eqB a (au u) :=
    mix_le_eqB (fun u : W => (u : A)) au hdis u
  have hwle : forall u : W, (u : A) <= phi a := fun u => by
    have : (u : A) <= eqB (au u) a sqcap phi (au u) :=
      le_inf (by rw [eqB_comm]; exact hmix u) (hau u)

```



```

    exact this.trans (hcongr (au u) a)
let u0 : A := bigcup x, phi x
let g : A := bigcup u : W, (u : A)
have hu0_le : u0 <= g := by
  by_contra hne
  have hiff : u0 <= g <-> u0 sqcap g? = False := by
    rw [ <- disjoint_compl_right_iff, disjoint_iff]
  have hvne : u0 sqcap g? != False := mt hiff.mpr hne
  let v : A := u0 sqcap g?
  have : bigcup x, v sqcap phi x != False := by
    rw [ <- inf_iSup_eq, show v sqcap u0 = v from inf_eq_left.mpr inf_le_left]
  exact hvne
obtain <x, hx> : exists x, v sqcap phi x != False := by
  contrapose! this
  exact iSup_eq_bot.mpr this
let d : A := v sqcap phi x
have hdD : d in D := <x, inf_le_right>
have hdisj (w : A) (hw : w in W) : d sqcap w = False := by
  have hdg : d sqcap g <= False := by
    have : d <= g? := inf_le_of_left_le inf_le_right
    exact (inf_le_inf_right g this).trans (inf_comm (a := g?) (b := g) |>)
inf_compl_eq_bot.le)
exact bot_unique <| (inf_le_inf_left d (le_iSup (fun u : W => (u : A)) <w, hw>)).trans
hdg
have hinsert : insert d W in S :=
  <Set.insert_subset_iff.mpr <hdD, hWD>,
  hWpair.insert fun w hw => <hdisj w hw, by rw [inf_comm]; exact hdisj w hw>>
have hdW : d in W := Maximal.mem_of_prop_insert hWmax hinsert
have : d <= False :=
  (le_inf (le_iSup (fun u : W => (u : A)) <d, hdW>)
  (inf_le_of_left_le inf_le_right)).trans inf_compl_eq_bot.le
exact hx (le_bot_iff.mpr this)
refine <a, le_antisymm (le_iSup phi a) (hu0_le.trans (iSup_le fun u => hWle u))>

/-- Jech Lemma 14.19 for a `Delta_0` formula with one extra free variable. -/
theorem jech_lemma_14_19 {n : Nat} (phi : DOFormula (n + 1))
  (? : Fin n -> AName.{u} A) :
  exists a, bval phi (consName a ?) = bigcup x, bval phi (consName x ?) :=
  fullness (fun x => bval phi (consName x ?)) fun x y => bval_subst phi x y ?

/-- CSL Theorem 1(iii): if `?exists x ?(x)? = a` then some name realizes value `a`. -/
theorem theorem_1_iii (phi : AName.{u} A -> A)
  (hcongr : forall x y, eqB x y sqcap phi x <= phi y) :
  forall a, a = bigcup x, phi x -> exists x, phi x = a :=
  fun _a ha => (fullness phi hcongr).imp fun _ h => ha |> h

theorem iInf_top_bot {? : Sort*} [Nontrivial A] (f : ? -> A)
  (hf : forall i, f i = top \ / f i = False) :
  ((? i, f i) = top <-> forall i, f i = top) /\ ((? i, f i) = False <-> exists i,
  f i = False) := by
  constructor
* exact iInf_eq_top
* constructor
* intro hbot
  by_contra hall
  push Not at hall
  have htop : forall i, f i = top := fun i => (hf i).resolve_right (hall i)
  have : (? i, f i) = top := iInf_eq_top.mpr htop
  rw [hbot] at this
  exact absurd this bot_ne_top
* intro <i, hi>
  exact bot_unique (hi |> iInf_le _ i)

```

```

theorem iSup_top_bot {? : Sort*} [Nontrivial A] (f : ? -> A)
  (hf : forall i, f i = top \ / f i = False) :
  (( bigcup i, f i) = top <-> exists i, f i = top ) /\ (( bigcup i, f i) = False
  <-> forall i, f i = False) := by
  constructor
* constructor
  * intro htop
    by_contra hall
    push Not at hall
    have hbot : forall i, f i = False := fun i => (hf i).resolve_left (hall i)
    have : ( bigcup i, f i) = False := iSup_eq_bot.mpr hbot
    rw [this] at htop
    exact absurd htop bot_ne_top
  * intro <i, hi>
    exact top_unique (hi |> le_iSup f i)
* exact iSup_eq_bot

/-- Check-names are two-valued on atomic equality and membership. -/
theorem check_atomic [Nontrivial A] (x y : PSet.{u}) :
  (eqB (check (A := A) x) (check y) = top <-> PSet.Equiv x y) /\
  (eqB (check (A := A) x) (check y) = False <-> not PSet.Equiv x y) /\
  (memB (check (A := A) x) (check y) = top <-> x in y) /\
  (memB (check (A := A) x) (check y) = False <-> x notin y) := by
  let R : PSet.{u} x PSet.{u} -> PSet.{u} x PSet.{u} -> Prop :=
    InvImage measLt fun p => meas (check (A := A) p.1) (check p.2)
  have hwf : WellFounded R :=
    InvImage.wf _ (WellFounded.prod_lex wellFounded_lt
      (WellFounded.prod_lex wellFounded_lt wellFounded_lt))
  refine hwf.induction (x, y)
  (C := fun p =>
    (eqB (check (A := A) p.1) (check p.2) = top <-> PSet.Equiv p.1 p.2) /\
    (eqB (check (A := A) p.1) (check p.2) = False <-> not PSet.Equiv p.1 p.2) /\
    (memB (check (A := A) p.1) (check p.2) = top <-> p.1 in p.2) /\
    (memB (check (A := A) p.1) (check p.2) = False <-> p.1 notin p.2))
  fun p ih => ?_
rcases p with <x, y>
cases x with
| mk a f =>
  cases y with
  | mk b g =>
    have ihL (i : a) :=
      ih (f i, PSet.mk b g)
      (measLt_of_rank_left (rank_child_lt (check (A := A) (PSet.mk a f)) i))
    have ihR (j : b) :=
      ih (PSet.mk a f, g j)
      (measLt_of_rank_right (rank_child_lt (check (A := A) (PSet.mk b g)) j))
    have ihS (j : b) :=
      ih (g j, PSet.mk a f)
      (measLt_of_rank_swap (rank_child_lt (check (A := A) (PSet.mk b g)) j))
    have hmemL (i : a) := (ihL i).2.2
    have hmemS (j : b) := (ihS j).2.2
    have heqR (j : b) : _ /\ _ := <(ihR j).1, (ihR j).2.1>
    have hI1f (i : a) :
      memB (check (A := A) (f i)) (check (PSet.mk b g)) = top \ /
      memB (check (A := A) (f i)) (check (PSet.mk b g)) = False := by
      by_cases h : f i in PSet.mk b g
      * exact Or.inl ((hmemL i).1.mpr h)
      * exact Or.inr ((hmemL i).2.mpr h)
    have hI2f (j : b) :
      memB (check (A := A) (g j)) (check (PSet.mk a f)) = top \ /
      memB (check (A := A) (g j)) (check (PSet.mk a f)) = False := by
      by_cases h : g j in PSet.mk a f
      * exact Or.inl ((hmemS j).1.mpr h)

```

```

    * exact Or.inr ((hmemS j).2.mpr h)
have hEqf (j : b) :
  eqB (check (A := A) (PSet.mk a f)) (check (g j)) = top \ /
  eqB (check (A := A) (PSet.mk a f)) (check (g j)) = False := by
  by_cases h : PSet.Equiv (PSet.mk a f) (g j)
  * exact Or.inl ((heqR j).1.mpr h)
  * exact Or.inr ((heqR j).2.mpr h)
have hequiv :
  PSet.Equiv (PSet.mk a f) (PSet.mk b g) <=>
    (forall i, f i in PSet.mk b g) /\ forall j, g j in PSet.mk a f := by
  rw [PSet.equiv_iff]
  refine and_congr (forall_congr' fun _ => Iff.rfl) (forall_congr' fun _ => ?_)
  exact exists_congr fun _ => PSet.Equiv.comm
have heq_def :
  eqB (check (A := A) (PSet.mk a f)) (check (PSet.mk b g)) =
    (? i, memB (check (A := A) (f i)) (check (PSet.mk b g))) sqcap
    (? j, memB (check (A := A) (g j)) (check (PSet.mk a f))) := by
  rw [check_mk (A := A) a f, check_mk (A := A) b g, eqB_mk]
  simp [top_himp]
have hmem_def :
  memB (check (A := A) (PSet.mk a f)) (check (PSet.mk b g)) =
    bigcup j, eqB (check (A := A) (PSet.mk a f)) (check (g j)) := by
  rw [check_mk (A := A) b g, memB_mk]
  simp
have hI1 := iInf_top_bot (fun i : a =>
  memB (check (A := A) (f i)) (check (PSet.mk b g))) hI1f
have hI2 := iInf_top_bot (fun j : b =>
  memB (check (A := A) (g j)) (check (PSet.mk a f))) hI2f
have hS := iSup_top_bot (fun j : b =>
  eqB (check (A := A) (PSet.mk a f)) (check (g j))) hEqf
have hI1top :
  ((? i, memB (check (A := A) (f i)) (check (PSet.mk b g))) = top <=>
    forall i, f i in PSet.mk b g) := by
  rw [hI1.1]; exact forall_congr' fun i => (hmemL i).1
have hI2top :
  ((? j, memB (check (A := A) (g j)) (check (PSet.mk a f))) = top <=>
    forall j, g j in PSet.mk a f) := by
  rw [hI2.1]; exact forall_congr' fun j => (hmemS j).1
have hI1bot :
  ((? i, memB (check (A := A) (f i)) (check (PSet.mk b g))) = False <=>
    exists i, f i notin PSet.mk b g) := by
  rw [hI1.2]; exact exists_congr fun i => (hmemL i).2
have hI2bot :
  ((? j, memB (check (A := A) (g j)) (check (PSet.mk a f))) = False <=>
    exists j, g j notin PSet.mk a f) := by
  rw [hI2.2]; exact exists_congr fun j => (hmemS j).2
refine <?eq_top, ?eq_bot, ?mem_top, ?mem_bot>
* rw [heq_def, inf_eq_top_iff, hI1top, hI2top, hequiv]
* constructor
* intro hbot hE
  have htop :
    (? i, memB (check (A := A) (f i)) (check (PSet.mk b g))) sqcap
    (? j, memB (check (A := A) (g j)) (check (PSet.mk a f))) = top := by
  rw [inf_eq_top_iff, hI1top, hI2top]
  exact hequiv.mp (by simp using hE)
  exact absurd (htop.symm.trans (heq_def |> hbot)) top_ne_bot
* intro hne
  rw [heq_def]
  rw [hequiv, not_and_or] at hne
  rcases hne with h | h

```

Lean 4 source (lines 801–1200)

```

* rw [hI1bot.mpr (by simp [not_forall] using h), bot_inf_eq]

```

```

    * rw [hI2bot.mpr (by simp [not_forall] using h), inf_bot_eq]
    * rw [hmem_def, hS.1, PSet.mem_def]
      exact exists_congr fun j => (heqR j).1
    * rw [hmem_def, hS.2, PSet.mem_def, not_exists]
      exact forall_congr' fun j => (heqR j).2

/-- Boolean values of `Delta_0` formulas at check-names are two-valued and agree with `PSet`.
-/
theorem d0_invariance [Nontrivial A] {n : Nat} (phi : DOFormula n)
  (? : Fin n -> PSet.{u}) :
  (phi.realize ? -> bval (A := A) phi (fun i => check (? i)) = top) /\
  (not phi.realize ? -> bval (A := A) phi (fun i => check (? i)) = False) := by
  induction phi with
  | mem i j =>
    exact <(check_atomic (? i) (? j)).2.2.1.mpr, (check_atomic (? i) (? j)).2.2.2.mpr>
  | eq i j =>
    exact <(check_atomic (? i) (? j)).1.mpr, (check_atomic (? i) (? j)).2.1.mpr>
  | not phi ih =>
    constructor
    * intro h
      have : bval (A := A) phi (fun i => check (? i)) = False := (ih ?).2 h
      rw [bval_not, this, compl_bot]
    * intro h
      have : bval (A := A) phi (fun i => check (? i)) = top :=
        (ih ?).1 (Classical.not_not.mp h)
      rw [bval_not, this, compl_top]
  | and phi psi ihphi ihpsi =>
    constructor
    * intro <hphi, hpsi>
      rw [bval_and, (ihphi ?).1 hphi, (ihpsi ?).1 hpsi, top_inf_eq]
    * intro h
      rw [realize, not_and_or] at h
      rw [bval_and]
      rcases h with h | h
      * rw [(ihphi ?).2 h, bot_inf_eq]
      * rw [(ihpsi ?).2 h, inf_bot_eq]
  | bExists k phi ih =>
    constructor
    * intro <y, hymem, hy>
      rw [bval_bExists]
      have hmem : memB (check (A := A) y) (check (? k)) = top :=
        (check_atomic y (? k)).2.2.1.mpr hymem
      have hb : bval (A := A) phi (fun i => check (consPSet y ? i)) = top :=
        (ih (consPSet y ?)).1 hy
      refine top_unique (le_trans ?_
        (le_iSup (fun z : AName A =>
          (memB z (check (A := A) (? k)) sqcap
            bval phi (consName z fun i => check (? i)) : A)) (check y)))
      rw [check_cons, hmem, hb, top_inf_eq]
    * intro h
      rw [bval_bExists, iSup_eq_bot]
      intro z
      cases hk : ? k with
      | mk b g =>
        have hk' : ? k = PSet.mk b g := hk
        rw [check_mk, memB_mk, inf_comm, inf_iSup_eq]
        refine iSup_eq_bot.mpr fun j => ?_
        simp only [inf_top_eq]
        have hsubst := bval_subst (A := A) phi z (check (g j)) (fun i => check (? i))
        have hmemg : g j in ? k := by
          rw [hk']; exact PSet.Mem.mk g j
        have hbot : bval (A := A) phi (fun i => check (consPSet (g j) ? i)) = False :=
          (ih (consPSet (g j) ?)).2 (fun hphi => h <g j, hmemg, hphi>)

```

```

      rw [check_cons] at hsubst
      rw [inf_comm]
      exact eq_bot_iff.mpr (hsubst.trans hbot.le)
| bForall k phi ih =>
  constructor
  * intro h
    rw [bval_bForall]
    refine iInf_eq_top.mpr fun z => himp_eq_top_iff.mpr ?_
    cases hk : ? k with
    | mk b g =>
      have hk' : ? k = PSet.mk b g := hk
      rw [check_mk, memB_mk]
      simp only [inf_top_eq]
      refine iSup_le fun j => ?_
      have hmemg : g j in ? k := by
        rw [hk']; exact PSet.Mem.mk g j
      have htop : bval (A := A) phi (fun i => check (consPSet (g j) ? i)) = top :=
        (ih (consPSet (g j) ?)).1 (h (g j) hmemg)
      have hsubst := bval_subst (A := A) phi (check (g j)) z (fun i => check (? i))
      rw [check_cons, htop, inf_top_eq, eqB_comm] at hsubst
      exact hsubst
  * intro h
    rw [realize, not_forall] at h
    obtain <y, hy> := h
    have hymem : y in ? k := (Classical.not_imp.mp hy).1
    have hn : not phi.realize (consPSet y ?) := (Classical.not_imp.mp hy).2
    have hbot : bval (A := A) phi (fun i => check (consPSet y ? i)) = False :=
      (ih (consPSet y ?)).2 hn
    have hmem : memB (check (A := A) y) (check (? k)) = top :=
      (check_atomic y (? k)).2.2.1.mpr hymem
    rw [bval_bForall]
    refine bot_unique ((iInf_le (fun z : AName A =>
      memB z (check (A := A) (? k)) ?
      bval phi (consName z fun i => check (? i))) (check y)).trans ?_)
    rw [check_cons, hmem, hbot, top_himp]

/-- Jech Lemma 14.21 / CSL Theorem 2: `Delta_0` invariance. -/
theorem jech_lemma_14_21 [Nontrivial A] {n : Nat} (phi : D0Formula n)
  (? : Fin n -> PSet.{u}) :
  phi.realize ? <-> bval (A := A) phi (fun i => check (? i)) = top := by
  constructor
  * exact (d0_invariance phi ?).1
  * intro htop
    by_contra h
    have : bval (A := A) phi (fun i => check (? i)) = False := (d0_invariance phi ?).2 h
    exact absurd (htop.symm.trans this) top_ne_bot

/-!
## Internal set constructions (CSL 2026, S2 after Theorem 1)
-/

/-- Membership is downward closed under Boolean inclusion. -/
theorem memB_of_subsetB (z x y : AName.{u} A) :
  memB z x sqcap subsetB x y <= memB z y := by
  rw [memB_eq (x := z) (y := x), iSup_inf_eq]
  refine iSup_le fun i => ?_
  have hval : x.val i sqcap subsetB x y <= memB (x.child i) y := by
    rw [inf_comm]; exact subsetB_apply x y i
  have hsub : eqB z (x.child i) sqcap memB (x.child i) y <= memB z y := by
    rw [eqB_comm (x := z) (y := x.child i), inf_comm]
    exact memB_eqB_left (x.child i) y z
  refine le_trans ?_ hsub
  refine le_inf ?_ ?_

```

```

* exact inf_le_of_left_le inf_le_left
* refine le_trans ?_ hval
  exact le_inf (inf_le_of_left_le inf_le_right) inf_le_right

/-- Boolean inclusion is transitive. -/
theorem AName.subsetB_trans (x y z : AName.{u} A) :
  subsetB x y sqcap subsetB y z <= subsetB x z := by
  refine le_inf fun i => ?_
  rw [le_himp_iff]
  have hxy : subsetB x y sqcap x.val i <= memB (x.child i) y := subsetB_apply x y i
  refine le_trans ?_ (memB_of_subsetB (x.child i) y z)
  refine le_inf ?_ ?_
  * exact hxy.trans' (le_inf (inf_le_of_left_le inf_le_left) inf_le_right)
  * exact inf_le_of_left_le inf_le_right

/-- {x}^A. -/
noncomputable def singletonB (x : AName.{u} A) : AName.{u} A :=
  mk PUnit.{u + 1} (fun _ => x) (fun _ => top)

/-- {x, y}^A. -/
noncomputable def pairB (x y : AName.{u} A) : AName.{u} A :=
  mk (ULift.{u} Bool) (fun b => if b.down then x else y) (fun _ => top)

/-- Kuratowski ordered pair (x, y)^A = {{x}^A, {x, y}^A}. -/
noncomputable def opairB (x y : AName.{u} A) : AName.{u} A :=
  pairB (singletonB x) (pairB x y)

/-- Insert `x` into the name `y`. -/
noncomputable def insertB (x y : AName.{u} A) : AName.{u} A :=
  mk (Option y.idx)
    (fun o => match o with | none => x | some i => y.child i)
    (fun o => match o with | none => top | some i => y.val i)

/-- Von Neumann successor `n` U {n}. -/
noncomputable def succB (n : AName.{u} A) : AName.{u} A :=
  insertB n n

/-- Cartesian product `X` x `Y`. -/
noncomputable def prodB (X Y : AName.{u} A) : AName.{u} A :=
  mk (X.idx x Y.idx)
    (fun p => opairB (X.child p.1) (Y.child p.2))
    (fun p => memB (X.child p.1) X sqcap memB (Y.child p.2) Y)

/-- P^A(X): names with the same domain as `X` and values `<= X(t)`. -/
noncomputable def powerB (X : AName.{u} A) : AName.{u} A :=
  mk {v : X.idx -> A // forall i, v i <= X.val i}
    (fun p => mk X.idx X.child p.1)
    (fun _ => top)

/-- Separation {x in X | ?(x)}^A. -/
noncomputable def sepB (X : AName.{u} A) (phi : AName.{u} A -> A) : AName.{u} A :=
  mk X.idx X.child (fun i => X.val i sqcap phi (X.child i))

/-- Canonical copy of `S` with domain `dom(X)`. -/
noncomputable def restrictName (S X : AName.{u} A) : AName.{u} A :=
  mk X.idx X.child (fun i => X.val i sqcap memB (X.child i) S)

theorem memB_singletonB (z x : AName.{u} A) :
  memB z (singletonB x) = eqB z x := by
  rw [singletonB, memB_mk, iSup_unique (a := A) (? := PUnit.{u + 1}), inf_top_eq]

theorem iSup_ulift_bool (f : ULift.{u} Bool -> A) :
  (bigcup b, f b) = f <true> sqsup f <false> :=

```

```

le_antisymm
  (iSup_le fun b => by
    rcases b with <b>
    cases b with
    | false => exact le_sup_right
    | true => exact le_sup_left)
  (sup_le (le_iSup f <true>) (le_iSup f <false>))

theorem memB_pairB (z x y : AName.{u} A) :
  memB z (pairB x y) = eqB z x sqsup eqB z y := by
  unfold pairB
  rw [memB_mk, iSup_ulift_bool]
  simp

theorem iSup_option {b : Type u} (f : Option b -> A) :
  (bigcup o, f o) = f none sqsup bigcup i, f (some i) :=
  le_antisymm
  (iSup_le fun o =>
    match o with
    | none => le_sup_left
    | some i => le_sup_of_le_right (le_iSup (fun j => f (some j)) i))
  (sup_le (le_iSup f none) (iSup_le fun i => le_iSup f (some i)))

theorem memB_insertB (z x y : AName.{u} A) :
  memB z (insertB x y) = eqB z x sqsup memB z y := by
  unfold insertB
  rw [memB_mk, iSup_option, memB_eq]
  simp

/-- `?z in {x}^A? sqcap ?z in {y}^A?` forces `x = y` (14.16). -/
theorem eqB_of_memB_singletons (z x y : AName.{u} A) :
  memB z (singletonB x) sqcap memB z (singletonB y) <= eqB x y := by
  rw [memB_singletonB, memB_singletonB, eqB_comm (x := z) (y := x)]
  exact eqB_trans x z y

theorem subsetB_singletonB (x y : AName.{u} A) :
  subsetB (singletonB x) y = memB x y := by
  rw [singletonB, subsetB_mk, iInf_unique (a := A) (? := PUnit.{u + 1}), top_himp]

theorem subsetB_pairB (x y z : AName.{u} A) :
  subsetB (pairB x y) z = memB x z sqcap memB y z := by
  unfold pairB
  rw [subsetB_mk]
  refine le_antisymm ?_ ?_
  * refine le_inf ?_ ?_
  * have := iInf_le (fun b : ULift.{u} Bool =>
    (top : A) ? memB (if b.down then x else y) z) <true>
    simp using this
  * have := iInf_le (fun b : ULift.{u} Bool =>
    (top : A) ? memB (if b.down then x else y) z) <false>
    simp using this
  * refine le_iInf fun b => ?_
  rw [top_himp]
  rcases b with <b>
  cases b <;> simp

theorem eqB_singletonB (x y : AName.{u} A) :
  eqB (singletonB x) (singletonB y) = eqB x y := by
  rw [eqB_eq_subset, subsetB_singletonB, subsetB_singletonB, memB_singletonB,
  memB_singletonB, eqB_comm (x := y) (y := x), inf_idem]

theorem eqB_pairB (x y u v : AName.{u} A) :
  eqB (pairB x y) (pairB u v) =

```

```

      (eqB x u sqcap eqB y v) sqsup (eqB x v sqcap eqB y u) := by
have hsub (a b c d : AName A) :
  subsetB (pairB a b) (pairB c d) = (eqB a c sqsup eqB a d) sqcap (eqB b c sqsup eqB
    b d) := by
  rw [subsetB_pairB, memB_pairB, memB_pairB]
rw [eqB_eq_subset, hsub x y u v, hsub u v x y, eqB_comm (x := u) (y := x),
  eqB_comm (x := v) (y := y), eqB_comm (x := v) (y := x), eqB_comm (x := u) (y := y)]
set Ax := eqB x u
set Bx := eqB x v
set Cx := eqB y u
set Dx := eqB y v
change ((Ax sqsup Bx) sqcap (Cx sqsup Dx)) sqcap ((Ax sqsup Cx) sqcap (Bx sqsup
  Dx)) = (Ax sqcap Dx) sqsup (Bx sqcap Cx)
have hre : ((Ax sqsup Bx) sqcap (Cx sqsup Dx)) sqcap ((Ax sqsup Cx) sqcap (Bx
  sqsup Dx)) =
  ((Ax sqsup Bx) sqcap (Ax sqsup Cx)) sqcap ((Cx sqsup Dx) sqcap (Bx sqsup Dx
  )) := by ac_rfl
have h1 : (Ax sqsup Bx) sqcap (Ax sqsup Cx) = Ax sqsup Bx sqcap Cx := (sup_inf_left
  Ax Bx Cx).symm
have h2 : (Cx sqsup Dx) sqcap (Bx sqsup Dx) = Dx sqsup Bx sqcap Cx := by
  calc (Cx sqsup Dx) sqcap (Bx sqsup Dx)
    = (Dx sqsup Cx) sqcap (Dx sqsup Bx) := by rw [sup_comm (a := Cx), sup_comm (a :=
      Bx)]
  _ = Dx sqsup Cx sqcap Bx := (sup_inf_left Dx Cx Bx).symm
  _ = Dx sqsup Bx sqcap Cx := by rw [inf_comm (a := Cx)]
rw [hre, h1, h2]
have h3 : (Ax sqsup Bx sqcap Cx) sqcap (Dx sqsup Bx sqcap Cx) = (Bx sqcap Cx)
  sqsup Ax sqcap Dx := by
  rw [sup_comm (a := Ax), sup_comm (a := Dx)]
  exact (sup_inf_left (Bx sqcap Cx) Ax Dx).symm
rw [h3, sup_comm]

theorem eqB_pairB_of_eq (x y u v : AName.{u} A) :
  eqB x u sqcap eqB y v <= eqB (pairB x y) (pairB u v) := by
  rw [eqB_pairB]
  exact le_sup_left

theorem eqB_singletonB_pairB (x u v : AName.{u} A) :
  eqB (singletonB x) (pairB u v) = eqB x u sqcap eqB x v := by
  rw [eqB_eq_subset, subsetB_singletonB, subsetB_pairB, memB_pairB, memB_singletonB,
    memB_singletonB, eqB_comm (x := u) (y := x), eqB_comm (x := v) (y := x)]
  exact le_antisymm inf_le_right (le_inf (le_sup_of_le_left inf_le_left) le_rfl)

theorem eqB_opairB (x y u v : AName.{u} A) :
  eqB (opairB x y) (opairB u v) = eqB x u sqcap eqB y v := by
  rw [opairB, opairB, eqB_pairB, eqB_singletonB, eqB_pairB, eqB_singletonB_pairB]
have hR : eqB (pairB x y) (singletonB u) = eqB x u sqcap eqB y u := by
  rw [eqB_comm, eqB_singletonB_pairB, eqB_comm (x := u) (y := x),
    eqB_comm (x := u) (y := y)]
rw [hR]
have htrans : eqB x u sqcap eqB x v sqcap eqB y u <= eqB y v := by
  have h1 : eqB y u sqcap eqB u x <= eqB y x := eqB_trans y u x
  have h2 : eqB y x sqcap eqB x v <= eqB y v := eqB_trans y x v
  refine le_trans ?_ h2
  refine le_inf ?_ ?_
  * refine le_trans ?_ h1
    rw [eqB_comm (x := u) (y := x)]
    exact le_inf inf_le_right (inf_le_of_left_le inf_le_left)
  * exact inf_le_of_left_le inf_le_right
refine le_antisymm ?_ ?_
* refine sup_le ?_ ?_
  * rw [inf_sup_left]
    refine sup_le inf_le_right ?_

```



```

    refine le_inf inf_le_left ?_
    exact htrans.trans' (le_of_eq (inf_assoc _ _ _).symm)
* refine le_inf (inf_le_of_left_le inf_le_left) ?_
    exact htrans.trans' (le_inf inf_le_left (inf_le_of_right_le inf_le_right))
* refine le_sup_of_le_left (le_inf inf_le_left (le_sup_of_le_left ?_))
    exact le_inf inf_le_left inf_le_right

theorem subsetB_of_le_val (X : AName.{u} A) (v : X.idx -> A)
  (hv : forall i, v i <= X.val i) :
  subsetB (mk X.idx X.child v) X = top :=
  iInf_eq_top.mpr fun i => himp_eq_top_iff.mpr ((hv i).trans (val_le_memB X i))

theorem subsetB_restrictName_self (S X : AName.{u} A) :
  subsetB (restrictName S X) S = top :=
  iInf_eq_top.mpr fun _ => himp_eq_top_iff.mpr inf_le_right

theorem subsetB_le_subsetB_restrict (S X : AName.{u} A) :
  subsetB S X <= subsetB S (restrictName S X) := by
  refine le_iInf fun i => ?_
  rw [le_himp_iff]
  have hSX : subsetB S X sqcap S.val i <= memB (S.child i) X := subsetB_apply S X i
  have hmemS : S.val i <= memB (S.child i) S := val_le_memB S i
  rw [memB_eq]
  have : subsetB S X sqcap S.val i <=
    (bigcup j, eqB (S.child i) (X.child j) sqcap X.val j) sqcap memB (S.child i) S :=
    le_inf (hSX.trans (le_of_eq (memB_eq (S.child i) X)))
      (inf_le_of_right_le hmemS)
  refine this.trans ?_
  rw [iSup_inf_eq]
  refine iSup_le fun j => ?_
  refine le_iSup_of_le j ?_
  have hchild : (restrictName S X).child j = X.child j := rfl
  have hval : (restrictName S X).val j = X.val j sqcap memB (X.child j) S := rfl
  rw [hchild, hval]
  have hsubst : eqB (S.child i) (X.child j) sqcap memB (S.child i) S <=
    memB (X.child j) S := by
    rw [inf_comm]; exact memB_eqB_left (S.child i) S (X.child j)
  refine le_inf (inf_le_of_left_le inf_le_left) ?_
  refine le_inf (inf_le_of_left_le inf_le_right) ?_
  exact hsubst.trans' (le_inf (inf_le_of_left_le inf_le_left) inf_le_right)

theorem subsetB_le_eqB_restrict (S X : AName.{u} A) :
  subsetB S X <= eqB S (restrictName S X) := by
  rw [eqB_eq_subset, subsetB_restrictName_self, inf_top_eq]
  exact subsetB_le_subsetB_restrict S X

/-- Paper: `?S in P^A(X)? = ?S subteq X?`. -/
theorem memB_powerB (S X : AName.{u} A) :
  memB S (powerB X) = subsetB S X := by
  refine le_antisymm ?_ ?_
  * rw [memB_eq]
    refine iSup_le fun p => ?_
    have htop : subsetB (mk X.idx X.child p.1) X = top := subsetB_of_le_val X p.1 p.2
    have hle : eqB S (mk X.idx X.child p.1) <= subsetB S X := by
      have htrans := subsetB_trans S (mk X.idx X.child p.1) X
      rw [htop, inf_top_eq] at htrans
      exact (eqB_le_subsetB S (mk X.idx X.child p.1)).trans htrans
    exact inf_le_of_left_le hle
  * refine (subsetB_le_eqB_restrict S X).trans ?_
    rw [memB_eq]
    refine le_iSup_of_le <fun i => X.val i sqcap memB (X.child i) S, fun _ => inf_le_left> ?_
    exact le_inf le_rfl le_top

```

```

theorem sepB_val (X : AName.{u} A) (phi : AName.{u} A -> A) (i : X.idx) :
  (sepB X phi).val i = X.val i sqcap phi (X.child i) :=
  rfl

theorem prodB_val (X Y : AName.{u} A) (i : X.idx) (j : Y.idx) :
  (prodB X Y).val (i, j) = memB (X.child i) X sqcap memB (Y.child j) Y :=
  rfl

/-!
## Theorem 2 consequences: check commutes with finite set formers
-/

/-- Kuratowski ordered pair in `PSet`. -/
def p0pair (x y : PSet.{u}) : PSet.{u} :=
  insert ({x} : PSet) ({x, y} : PSet)

theorem check_insert (x y : PSet.{u}) :
  check (A := A) (insert x y) =
    mk (Option y.Type)
      (fun o => Option.casesOn o (check (A := A) x) (fun i => check (y.Func i)))
      (fun _ => top) := by
  simp only [insert, PSet.insert]
  cases y with
  | mk a f =>
    rw [check_mk]
    refine congr_arg (fun child => mk (Option a) child (fun _ => top)) ?_
    funext o
    cases o <;> rfl

```

Lean 4 source (lines 1201–1600)

```

theorem check_singleton (x : PSet.{u}) :
  eqB (check (A := A) ({x} : PSet)) (singletonB (check x)) = top := by
  have hx : ({x} : PSet) = insert x ({ } : PSet) := rfl
  rw [eqB_eq_subset, hx]
  refine inf_eq_top_iff.mpr <?fwd, ?bwd>
  * rw [check_insert, subsetB_mk]
    refine iInf_eq_top.mpr fun o => himp_eq_top_iff.mpr ?_
    rw [memB_singletonB (A := A)]
    cases o with
    | none =>
      change top <= eqB (check (A := A) x) (check x)
      exact (eqB_self (A := A) (check x)).ge
    | some i =>
      have : IsEmpty (PSet.Type ({ } : PSet)) := inferInstance
      exact this.elim i
  * rw [subsetB_singletonB, check_insert, memB_mk]
    refine top_unique (le_iSup_of_le none ?_)
    simp [eqB_self (A := A)]

theorem check_pair (x y : PSet.{u}) :
  eqB (check (A := A) ({x, y} : PSet)) (pairB (check x) (check y)) = top := by
  have hxy : ({x, y} : PSet) = insert x ({y} : PSet) := rfl
  have hy : ({y} : PSet) = insert y ({ } : PSet) := rfl
  rw [eqB_eq_subset, hxy]
  refine inf_eq_top_iff.mpr <?fwd, ?bwd>
  * rw [check_insert, subsetB_mk]
    refine iInf_eq_top.mpr fun o => himp_eq_top_iff.mpr ?_
    rw [memB_pairB (A := A)]
    cases o with
    | none => exact le_sup_of_le_left (eqB_self (A := A) (check x)).ge
    | some i =>
      revert i
      rw [hy]

```

```

    intro i
    cases i with
    | none =>
      simp [insert, PSet.insert]
      exact top_unique (le_sup_of_le_right (eqB_self (A := A) (check y)).ge)
    | some j =>
      have : IsEmpty (PSet.Type ({x} : PSet)) := inferInstance
      exact this.elim j
* rw [subsetB_pairB]
  refine inf_eq_top_iff.mpr <?hx, ?hy>
* rw [check_insert, memB_mk]
  refine top_unique (le_iSup_of_le none ?_)
  simp [eqB_self (A := A)]
* rw [check_insert, memB_mk, hy]
  refine top_unique (le_iSup_of_le (some none) ?_)
  simp [insert, PSet.insert]
  exact eqB_self (A := A) (check y)

theorem eqB_pairB_congr (x x' y y' : AName.{u} A) :
  eqB x x' sqcap eqB y y' <= eqB (pairB x y) (pairB x' y') :=
  eqB_pairB_of_eq (x := x) (y := y) (u := x') (v := y')

theorem check_opair (x y : PSet.{u}) :
  eqB (check (A := A) (pOpair x y)) (opairB (check x) (check y)) = top := by
  unfold pOpair opairB
  have h_1 := check_pair (A := A) ({x} : PSet) ({x, y} : PSet)
  have h_2 := check_singleton (A := A) x
  have h_3 := check_pair (A := A) x y
  have hcong : eqB (check (A := A) ({x} : PSet)) (singletonB (check x)) sqcap
    eqB (check ({x, y} : PSet)) (pairB (check x) (check y)) <=
    eqB (pairB (check ({x} : PSet)) (check ({x, y} : PSet)))
      (pairB (singletonB (check x)) (pairB (check x) (check y))) :=
    eqB_pairB_of_eq (A := A)
      (check (A := A) ({x} : PSet)) (check (A := A) ({x, y} : PSet))
      (singletonB (check (A := A) x))
      (pairB (check (A := A) x) (check y))
  have htop : eqB (check (A := A) ({x} : PSet)) (singletonB (check x)) sqcap
    eqB (check ({x, y} : PSet)) (pairB (check x) (check y)) = top := by
    rw [h_2, h_3, top_inf_eq]
  have hpair : eqB (check (A := A) (insert ({x} : PSet) ({x, y} : PSet)))
    (pairB (check ({x} : PSet)) (check ({x, y} : PSet))) = top :=
    check_pair (A := A) ({x} : PSet) ({x, y} : PSet)
  refine top_unique ?_
  have := eqB_trans
    (check (A := A) (insert ({x} : PSet) ({x, y} : PSet)))
    (pairB (check ({x} : PSet)) (check ({x, y} : PSet)))
    (pairB (singletonB (check x)) (pairB (check x) (check y)))
  exact (le_inf hpair.ge (htop.ge.trans hcong)).trans this

/-!
## Check of `?`: inductive and least in `V^A`
-/

theorem insertB_check (x y : PSet.{u}) :
  insertB (check (A := A) x) (check y) = check (insert x y) := by
  rw [check_insert]
  unfold insertB
  cases y with
  | mk a f =>
    rw [check_mk]
    refine congr_arg_2 (fun c v => mk (Option a) c v)
      (funext fun o => by cases o <;> rfl)
      (funext fun o => by cases o <;> rfl)

```

```

theorem check_succ (n : Nat) :
  check (A := A) (PSet.ofNat (n + 1)) = succB (check (PSet.ofNat n)) :=
  (insertB_check (PSet.ofNat n) (PSet.ofNat n)).symm

theorem subsetB_insertB (x y z : AName.{u} A) :
  subsetB (insertB x y) z = memB x z sqcap subsetB y z := by
  have hx : insertB x y =
    mk (Option y.idx)
      (fun o => match o with | none => x | some i => y.child i)
      (fun o => match o with | none => top | some i => y.val i) := rfl
  rw [hx, subsetB_mk]
  refine le_antisymm ?_ ?_
  * refine le_inf ?_ ?_
    * exact (iInf_le _ none).trans (by simp [top_himp])
    * refine le_iInf fun i => iInf_le _ (some i)
  * refine le_iInf fun o => ?_
    cases o with
    | none =>
      simp [top_himp]
    | some i =>
      change memB x z sqcap subsetB y z <= y.val i ? memB (y.child i) z
      rw [le_himp_iff]
      refine le_trans ?_ (subsetB_apply y z i)
      exact le_inf (inf_le_of_left_le inf_le_right) inf_le_right

theorem eqB_insertB (x x' y y' : AName.{u} A) :
  eqB x x' sqcap eqB y y' <= eqB (insertB x y) (insertB x' y') := by
  rw [eqB_eq_subset (x := insertB x y) (y := insertB x' y')]
  refine le_inf ?_ ?_
  * rw [subsetB_insertB, memB_insertB]
    refine le_inf ?_ ?_
    * exact inf_le_of_left_le (le_sup_of_le_left le_rfl)
    * have hsub : eqB y y' <= subsetB y (insertB x' y') := by
      have : subsetB y y' <= subsetB y (insertB x' y') := by
        refine le_iInf fun i => ?_
        rw [le_himp_iff]
        have := subsetB_apply y y' i
        refine this.trans ?_
        rw [memB_insertB]
        exact le_sup_right
      exact (eqB_le_subsetB y y').trans this
    exact inf_le_of_right_le hsub
  * rw [subsetB_insertB, memB_insertB, eqB_comm (x := x) (y := x'),
    eqB_comm (x := y) (y := y')]
    refine le_inf ?_ ?_
    * exact inf_le_of_left_le (le_sup_of_le_left le_rfl)
    * have hsub : eqB y' y <= subsetB y' (insertB x y) := by
      have : subsetB y' y <= subsetB y' (insertB x y) := by
        refine le_iInf fun i => ?_
        rw [le_himp_iff]
        have := subsetB_apply y' y i
        refine this.trans ?_
        rw [memB_insertB]
        exact le_sup_right
      exact (eqB_le_subsetB y' y).trans this
    exact inf_le_of_right_le hsub

theorem eqB_succB (n m : AName.{u} A) :
  eqB n m <= eqB (succB n) (succB m) :=
  (eqB_insertB n m n m).trans' (le_inf le_rfl le_rfl)

/-- Boolean value of '?`X` is inductive?: `{}` in `X` and successor-closed. -/

```

```

noncomputable def isInductiveB (X : AName.{u} A) : A :=
  memB (check ({ } : PSet.{u})) X sqcap
  ? n : AName.{u} A, memB n X ? memB (succB n) X

/-- `??` is inductive in `V^A`. Leastness is `check_omega_least`. -/
theorem check_omega_eq :
  check (A := A) PSet.omega =
    mk (ULift.{u} Nat) (fun n => check (PSet.ofNat n.down)) (fun _ => top ) := by
  rw [show PSet.omega = PSet.mk (ULift.{u} Nat) (fun n => PSet.ofNat n.down) from rfl]
  exact check_mk _ _

theorem check_omega_inductive :
  isInductiveB (A := A) (check PSet.omega) = top := by
  rw [isInductiveB, check_omega_eq]
  refine inf_eq_top_iff.mpr <?empty, ?succ>
  * rw [memB_mk]
  refine top_unique (le_iSup_of_le (<0> : ULift Nat) ?_)
  simp [PSet.ofNat]
  exact eqB_self (A := A) (check { })
  * refine iInf_eq_top.mpr fun n => himp_eq_top_iff.mpr ?_
  rw [memB_mk]
  refine iSup_le fun k => ?_
  have hsucc : eqB n (check (A := A) (PSet.ofNat k.down)) <=
    eqB (succB n) (succB (check (PSet.ofNat k.down))) :=
    eqB_succB (A := A) n (check (PSet.ofNat k.down))
  have hdef : succB (check (A := A) (PSet.ofNat k.down)) =
    check (PSet.ofNat (k.down + 1)) :=
    (check_succ (A := A) k.down).symm
  refine (inf_le_of_left_le hsucc).trans ?_
  rw [hdef, memB_mk]
  refine le_iSup_of_le (<k.down + 1> : ULift Nat) ?_
  exact le_inf le_rfl le_top

/-- Every von Neumann numeral is a member of an inductive name, by induction on `Nat`. -/
theorem memB_check_ofNat_of_inductive (X : AName.{u} A)
  (h : isInductiveB X = top ) (n : Nat) :
  memB (check (A := A) (PSet.ofNat n)) X = top := by
  have hparts := inf_eq_top_iff.mp h
  induction n with
  | zero =>
    exact hparts.1
  | succ n ih =>
    have hcl := iInf_eq_top.mp hparts.2 (check (A := A) (PSet.ofNat n))
    have hle : memB (check (A := A) (PSet.ofNat n)) X <=
      memB (succB (check (PSet.ofNat n))) X :=
      himp_eq_top_iff.mp hcl
    have : memB (succB (check (A := A) (PSet.ofNat n))) X = top :=
      top_unique (ih.ge.trans hle)
    rwa [ <- check_succ (A := A) n ] at this

/-- Leastness of `??`: if `X` is inductive at Boolean value 1, then `??` subseq X`
at Boolean value 1. Together with `check_omega_inductive` this is the
Theorem 2 consequence that `??` is inductive and least (the `??` of `V^A`).
The argument inducts on the `ULift Nat` index of `check_omega_eq`, not on
ordinal rank. -/
theorem check_omega_least {X : AName.{u} A} (h : isInductiveB X = top ) :
  subsetB (check (A := A) PSet.omega) X = top := by
  rw [check_omega_eq, subsetB_mk]
  refine iInf_eq_top.mpr fun n => himp_eq_top_iff.mpr ?_
  exact (memB_check_ofNat_of_inductive (A := A) X h n.down).ge

/-!
## Finite subsets and CSL Proposition 3

```

```

-/

/-- Finite enumeration as a pre-set. -/
def pfinEnum {n : Nat} (xs : Fin n -> PSet.{u}) : PSet.{u} :=
  PSet.mk (ULift.{u} (Fin n)) (fun i => xs i.down)

/-- Finite subsets of `X`, presented by enumerations of elements of `X`. -/
def pfin (X : PSet.{u}) : PSet.{u} :=
  PSet.mk (Sigma n : Nat, ULift.{u} (Fin n -> X.Type))
    (fun p => pfinEnum (fun i => X.Func (p.2.down i)))

/-- Finite enumeration as an `A`-name. -/
noncomputable def finsetB {n : Nat} (xs : Fin n -> AName.{u} A) : AName.{u} A :=
  mk (ULift.{u} (Fin n)) (fun i => xs i.down) (fun _ => top )

/-- `S` is finite: it equals some finite enumeration (external form of
`exists n in ?, exists f : n -> V, S = im(f)`). -/
noncomputable def isFiniteB (S : AName.{u} A) : A :=
  bigcup n : Nat, bigcup xs : Fin n -> AName.{u} A, eqB S (finsetB xs)

/-- `P_fin^A(X)` via separation on `P^A(X)`. -/
noncomputable def pfinB (X : AName.{u} A) : AName.{u} A :=
  sepB (powerB X) isFiniteB

theorem check_pfinEnum {n : Nat} (xs : Fin n -> PSet.{u}) :
  check (A := A) (pfinEnum xs) = finsetB (fun i => check (xs i)) := by
  unfold pfinEnum finsetB
  rw [check_mk]

theorem eqB_finsetB {n : Nat} (xs ys : Fin n -> AName.{u} A) :
  (? i, eqB (xs i) (ys i)) <= eqB (finsetB xs) (finsetB ys) := by
  rw [eqB_eq_subset]
  refine le_inf ?_ ?_
  * unfold finsetB
  rw [subsetB_mk]
  refine le_iInf fun i => ?_
  rw [top_himp, memB_mk]
  refine (iInf_le (fun j : Fin n => eqB (xs j) (ys j)) i.down).trans ?_
  exact le_iSup_of_le i (le_inf le_rfl le_top)
  * unfold finsetB
  rw [subsetB_mk]
  refine le_iInf fun i => ?_
  rw [top_himp, memB_mk]
  refine (iInf_le (fun j : Fin n => eqB (xs j) (ys j)) i.down).trans ?_
  refine le_iSup_of_le i ?_
  rw [eqB_comm]
  exact le_inf le_rfl le_top

theorem isFiniteB_congr (S T : AName.{u} A) :
  eqB S T sqcap isFiniteB S <= isFiniteB T := by
  unfold isFiniteB
  rw [inf_iSup_eq]
  refine iSup_le fun n => ?_
  rw [inf_iSup_eq]
  refine iSup_le fun xs => ?_
  refine le_iSup_of_le n (le_iSup_of_le xs ?_)
  have : eqB T S sqcap eqB S (finsetB xs) <= eqB T (finsetB xs) :=
    eqB_trans T S (finsetB xs)
  exact this.trans' (le_inf (by rw [eqB_comm]; exact inf_le_left) inf_le_right)

/-- Finite meets distribute over arbitrary joins (Sikorski 3.1.11). -/
theorem iInf_iSup_fun {n : Nat} {α : Type*} (f : Fin n -> α -> A) :
  (? i, bigcup j, f i j) = bigcup g : Fin n -> α, ? i, f i (g i) := by

```

```

induction n with
| zero =>
  have : Nonempty (Fin 0 -> ?) := <fun i => nomatch i>
  have hL : (? i : Fin 0, bigcup j, f i j) = top := iInf_of_empty _
  have hR : (bigcup g : Fin 0 -> ?, ? i, f i (g i)) = top := by
    have hg : forall g : Fin 0 -> ?, (? i, f i (g i)) = top := fun _ => iInf_of_empty _
    simp_rw [hg]
    exact iSup_const
  rw [hL, hR]
| succ n ih =>
  have hsplit : (? i : Fin (n + 1), bigcup j, f i j) =
    (bigcup j, f 0 j) sqcap ? i : Fin n, bigcup j, f i.succ j :=
    iInf_fin_succ fun i => bigcup j, f i j
  rw [hsplit, ih (fun i j => f i.succ j), inf_comm, iSup_inf_eq]
  refine le_antisymm ?fwd ?bwd
  * refine iSup_le fun g => ?_
    have hdis :
      (? i : Fin n, f i.succ (g i)) sqcap bigcup a : ?, f 0 a =
      bigcup a : ?, (? i : Fin n, f i.succ (g i)) sqcap f 0 a :=
      inf_iSup_eq (? i : Fin n, f i.succ (g i)) (fun a : ? => f 0 a)
    rw [hdis]
    refine iSup_le fun a => ?_
    refine le_iSup_of_le (Fin.cons (a := fun _ : Fin (n + 1) => ?) a g) ?_
    have hcons :
      (? i : Fin (n + 1),
        f i (Fin.cons (a := fun _ : Fin (n + 1) => ?) a g i)) =
        f 0 a sqcap ? i : Fin n, f i.succ (g i) := by
      rw [iInf_fin_succ
        (fun i => f i (Fin.cons (a := fun _ : Fin (n + 1) => ?) a g i))]
      simp [Fin.cons]
    rw [inf_comm]
    exact hcons.ge
  * refine iSup_le fun h => ?_
    refine le_iSup_of_le (fun i : Fin n => h i.succ) ?_
    refine le_inf ?_ ?_
    * exact le_iInf fun i => iInf_le (fun j : Fin (n + 1) => f j (h j)) i.succ
    * exact (iInf_le (fun j : Fin (n + 1) => f j (h j)) 0).trans
      (le_iSup (fun a : ? => f 0 a) (h 0))

theorem memB_sepB_ge (S X : AName.{u} A) (phi : AName.{u} A -> A)
  (hcongr : forall x y, eqB x y sqcap phi x <= phi y) :
  memB S X sqcap phi S <= memB S (sepB X phi) := by
  rw [memB_eq, memB_eq, iSup_inf_eq]
  refine iSup_le fun i => ?_
  refine le_iSup_of_le i ?_
  have hchild : (sepB X phi).child i = X.child i := rfl
  have hval : (sepB X phi).val i = X.val i sqcap phi (X.child i) := rfl
  rw [hchild, hval]
  refine le_inf (inf_le_of_left_le inf_le_left) ?_
  refine le_inf (inf_le_of_left_le inf_le_right) ?_
  exact (hcongr S (X.child i)).trans'
    (le_inf (inf_le_of_left_le inf_le_left) inf_le_right)

theorem subsetB_check_pfinEnum {n : Nat} (X : PSet.{u})
  (g : Fin n -> X.Type) :
  subsetB (check (A := A) (pfinEnum (fun i => X.Func (g i)))) (check X) = top := by
  cases X with
| mk a f =>
  rw [check_pfinEnum, finsetB, subsetB_mk]
  refine iInf_eq_top.mpr fun i => himp_eq_top_iff.mpr ?_
  refine (eqB_self (A := A) (check (f (g i.down)))) .ge.trans ?_
  rw [check_mk (A := A) a f, memB_mk]
  exact le_iSup_of_le (g i.down) (le_inf le_rfl le_top)

```

```

theorem check_pfin_mk {a : Type u} (f : a -> PSet.{u}) :
  check (A := A) (pfin (PSet.mk a f)) =
    mk (Sigma n : Nat, ULift.{u} (Fin n -> a))
      (fun p => check (pfinEnum (fun i => f (p.2.down i)))) (fun _ => top) := by
change check (A := A)
  (PSet.mk (Sigma n : Nat, ULift.{u} (Fin n -> a))
    (fun p => pfinEnum (fun i => f (p.2.down i)))) = _
rw [check_mk]

/-- CSL Proposition 3:  $\neg P_{\text{fin}}^A(X?) = (P_{\text{fin}} X)?? = 1$ . -/
theorem proposition_3 (X : PSet.{u}) :
  eqB (pfinB (check (A := A) X)) (check (pfin X)) = top := by
cases X with
| mk a f =>
  rw [eqB_eq_subset]
  refine inf_eq_top_iff.mpr <?fwd, ?bwd>
  * refine iInf_eq_top.mpr fun p => himp_eq_top_iff.mpr ?_
    set u := (pfinB (check (A := A) (PSet.mk a f))).child p
    have hval : (pfinB (check (A := A) (PSet.mk a f))).val p = isFiniteB u := by
      change top sqcap isFiniteB u = isFiniteB u
      rw [top_inf_eq]
    rw [hval]
    have hu : u = mk (check (A := A) (PSet.mk a f)).idx
      (check (PSet.mk a f)).child p.1 := rfl
    have hsubU : subsetB u (check (PSet.mk a f)) = top := by
      rw [hu]
      exact subsetB_of_le_val (check (A := A) (PSet.mk a f)) p.1 p.2
    unfold isFiniteB
    refine iSup_le fun n => iSup_le fun xs => ?_
    have hmem : eqB (A := A) u (finsetB xs) <=
      ? i, memB (xs i) (check (PSet.mk a f)) := by
      have h1 : eqB u (finsetB xs) <= subsetB (finsetB xs) u := by
        rw [eqB_comm]
        exact eqB_le_subsetB (finsetB xs) u
      have h2 : eqB u (finsetB xs) <=
        subsetB (finsetB xs) (check (PSet.mk a f)) :=
        (le_inf h1 (le_top.trans hsubU.ge)).trans
        (subsetB_trans (finsetB xs) u (check (PSet.mk a f)))
      unfold finsetB at h2
      rw [subsetB_mk] at h2
      refine h2.trans (le_iInf fun i => ?_)
      have hi := iInf_le (fun j : ULift.{u} (Fin n) =>
        (top : A) ? memB (xs j.down) (check (PSet.mk a f))) <i>
      simpa [top_himp] using hi
    have hdist :
      (? i, memB (xs i) (check (A := A) (PSet.mk a f))) =
        bigcup g : Fin n -> a, ? i, eqB (xs i) (check (f (g i))) := by
      have : forall i, memB (xs i) (check (PSet.mk a f)) =
        bigcup j : a, eqB (xs i) (check (f j)) := by
        intro i
        rw [check_mk, memB_mk]

```

Lean 4 source (lines 1601–2000)

```

  exact iSup_congr fun _ => inf_top_eq _
  simp only [this]
  exact iInf_iSup_fun fun i j => eqB (xs i) (check (f j))
  have heq := inf_eq_left.mpr hmem
  rw [← heq, hdist, inf_iSup_eq]
  refine iSup_le fun g => ?_
  have henum : (? i, eqB (xs i) (check (A := A) (f (g i)))) <=
    eqB (finsetB xs) (finsetB fun i => check (f (g i))) :=
    eqB_finsetB (A := A) xs fun i => check (f (g i))

```



```

have hto : eqB u (finsetB xs) sqcap eqB (finsetB xs)
  (finsetB fun i => check (f (g i))) <=
  eqB u (finsetB fun i => check (f (g i))) :=
  eqB_trans u (finsetB xs) (finsetB fun i => check (f (g i)))
refine ((le_inf inf_le_left (inf_le_of_right_le henum)).trans hto).trans ?_
rw [ <- check_pfinEnum, check_pfin_mk, memB_mk]
refine le_iSup_of_le (<n, <g>> : Sigma k : Nat, ULift.{u} (Fin k -> a)) ?_
exact le_inf le_rfl le_top
* rw [check_pfin_mk, subsetB_mk]
refine iInf_eq_top.mpr fun p => himp_eq_top_iff.mpr ?_
set xs := fun i : Fin p.1 => f (p.2.down i)
have hfin : isFiniteB (check (A := A) (pfinEnum xs)) = top := by
  unfold isFiniteB
  refine top_unique
    (le_iSup_of_le p.1 (le_iSup_of_le (fun i => check (xs i)) ?_))
  rw [ <- check_pfinEnum]
  exact (eqB_self (A := A) (check (pfinEnum xs))).ge
have hsub : subsetB (check (A := A) (pfinEnum xs))
  (check (PSet.mk a f)) = top :=
  subsetB_check_pfinEnum (A := A) (PSet.mk a f) p.2.down
have hpow : memB (check (A := A) (pfinEnum xs))
  (powerB (check (PSet.mk a f))) = top := by
  rw [memB_powerB, hsub]
exact (le_inf hpow.ge hfin.ge).trans
  (memB_sepB_ge (A := A) (check (pfinEnum xs))
    (powerB (check (PSet.mk a f))) isFiniteB isFiniteB_congr)

/-!
## Internal functions and `Set_A` (CSL 2026, S2 last paragraph)

`isFunctionB F X Y` is the Boolean value of `F subteq X x_A Y` is a functional
total relation?. `funsB X Y` is `{F in P^A(X x_A Y) | isFunctionB F X Y}^A`.
`homB X Y` is `Set_A(X,Y)`: names with `?F in funsB X Y? = 1`, modulo
`?F = G? = 1`. Identity is the identity relation; composition is relation
composition. This is not Theorem 1(i) or 1(ii).
-/

theorem eqB_top_memB_right {x y z : AName.{u} A} (h : eqB x y = top) :
  memB z x = memB z y :=
  le_antisymm
    ((memB_eqB_right (A := A) x z y).trans' (by rw [h]; exact le_inf le_rfl le_top))
    ((memB_eqB_right (A := A) y z x).trans'
      (by rw [eqB_comm (x := y) (y := x), h]; exact le_inf le_rfl le_top))

theorem eqB_top_memB_left {x y z : AName.{u} A} (h : eqB x y = top) :
  memB x z = memB y z :=
  le_antisymm
    ((memB_eqB_left (A := A) x z y).trans' (by rw [h]; exact le_inf le_rfl le_top))
    ((memB_eqB_left (A := A) y z x).trans'
      (by rw [eqB_comm (x := y) (y := x), h]; exact le_inf le_rfl le_top))

/-- `F = G` and `F subteq P` imply `G subteq P`. -/
theorem subsetB_of_eqB (F G P : AName.{u} A) :
  eqB F G sqcap subsetB F P <= subsetB G P :=
  (le_inf (inf_le_of_left_le ((eqB_comm (A := A) F G).le.trans (eqB_le_subsetB G F)))
    inf_le_right).trans
  (AName.subsetB_trans G F P)

theorem memB_eqB_left' (x y z : AName.{u} A) :
  eqB z x sqcap memB x y <= memB z y := by
  rw [inf_comm, eqB_comm (x := z) (y := x)]
  exact memB_eqB_left x y z

```

```

theorem inf_pair_le {a b c d u v : A} (hu : a sqcap c <= u) (hv : b sqcap d <= v) :
  (a sqcap b) sqcap (c sqcap d) <= u sqcap v :=
  le_inf
    (hu.trans' (le_inf (inf_le_of_left_le inf_le_left) (inf_le_of_right_le inf_le_left)))
    (hv.trans' (le_inf (inf_le_of_left_le inf_le_right) (inf_le_of_right_le inf_le_right)))

theorem inf_swap4 {a b c d : A} : (a sqcap c) sqcap (b sqcap d) <= (a sqcap b) sqcap
  (c sqcap d) :=
  le_inf (le_inf (inf_le_of_left_le inf_le_left) (inf_le_of_right_le inf_le_left))
    (le_inf (inf_le_of_left_le inf_le_right) (inf_le_of_right_le inf_le_right))

/-- `(x,y)^A in X x_A Y? = ?x in X? sqcap ?y in Y?`. -/
theorem memB_opairB_prodB (x y X Y : AName.{u} A) :
  memB (opairB x y) (prodB X Y) = memB x X sqcap memB y Y := by
  unfold prodB
  rw [memB_mk]
  refine le_antisymm ?fwd ?bwd
  * refine iSup_le fun p => ?_
    rcases p with <i, j>
    rw [eqB_opairB]
    exact inf_pair_le (A := A)
      (memB_eqB_left' (X.child i) X x) (memB_eqB_left' (Y.child j) Y y)
  * rw [memB_eq (x := x) (y := X), memB_eq (x := y) (y := Y), iSup_inf_eq]
    refine iSup_le fun i => ?_
    rw [inf_iSup_eq]
    refine iSup_le fun j => ?_
    refine le_iSup_of_le (i, j) ?_
    rw [eqB_opairB]
    exact (inf_swap4 (A := A)).trans
      (inf_le_inf le_rfl (inf_le_inf (val_le_memB X i) (val_le_memB Y j)))

theorem memB_sepB (S X : AName.{u} A) (phi : AName.{u} A -> A)
  (hcongr : forall x y, eqB x y sqcap phi x <= phi y) :
  memB S (sepB X phi) = memB S X sqcap phi S := by
  refine le_antisymm ?le (memB_sepB_ge (A := A) S X phi hcongr)
  rw [memB_eq (x := S) (y := sepB X phi), memB_eq (x := S) (y := X)]
  refine iSup_le fun i => ?_
  have hchild : (sepB X phi).child i = X.child i := rfl
  have hval : (sepB X phi).val i = X.val i sqcap phi (X.child i) := rfl
  rw [hchild, hval, <- inf_assoc]
  have hphi : eqB S (X.child i) sqcap phi (X.child i) <= phi S := by
    rw [eqB_comm (x := S) (y := X.child i)]
    exact hcongr (X.child i) S
  refine le_inf ?_ ?_
  * exact le_iSup_of_le i inf_le_left
  * exact hphi.trans' (le_inf (inf_le_of_left_le inf_le_left) inf_le_right)

/-- Single-valued: `(x,y_1) in F /\ (x,y_2) in F -> y_1 = y_2`. -/
noncomputable def isSingleValuedB (F : AName.{u} A) : A :=
  ? x : AName.{u} A, ? y1 : AName.{u} A, ? y2 : AName.{u} A,
  memB (opairB x y1) F sqcap memB (opairB x y2) F ? eqB y1 y2

/-- Total: `x in X -> exists y, (x,y) in F`. -/
noncomputable def isTotalB (F X : AName.{u} A) : A :=
  ? x : AName.{u} A, memB x X ? bigcup y : AName.{u} A, memB (opairB x y) F

/-- Boolean value of `?F subteq X x_A Y` is a functional total relation?. -/
noncomputable def isFunctionB (F X Y : AName.{u} A) : A :=
  subsetB F (prodB X Y) sqcap isSingleValuedB F sqcap isTotalB F X

theorem isSingleValuedB_apply (F x y1 y2 : AName.{u} A) :
  isSingleValuedB F sqcap memB (opairB x y1) F sqcap memB (opairB x y2) F <= eqB y1 y2
  := by

```

```

have h := iInf_le (fun x' : AName A =>
  ? y1' : AName A, ? y2' : AName A,
  memB (opairB x' y1') F sqcap memB (opairB x' y2') F ? eqB y1' y2') x
have h1 := (iInf_le (fun y1' : AName A =>
  ? y2' : AName A,
  memB (opairB x y1') F sqcap memB (opairB x y2') F ? eqB y1' y2') y1).trans'
h
have h2 := (iInf_le (fun y2' : AName A =>
  memB (opairB x y1) F sqcap memB (opairB x y2') F ? eqB y1 y2') y2).trans' h1
rw [inf_assoc]
exact le_himp_iff.mp h2

theorem isTotalB_apply (F X x : AName.{u} A) :
  isTotalB F X sqcap memB x X <= bigcup y : AName.{u} A, memB (opairB x y) F :=
  le_himp_iff.mp (iInf_le (fun x' : AName A =>
    memB x' X ? bigcup y : AName A, memB (opairB x' y) F) x)

theorem isSingleValuedB_congr (F G : AName.{u} A) :
  eqB F G sqcap isSingleValuedB F <= isSingleValuedB G := by
  refine le_iInf fun x => le_iInf fun y1 => le_iInf fun y2 => ?_
  rw [le_himp_iff]
  have hF1 : memB (opairB x y1) G sqcap eqB G F <= memB (opairB x y1) F :=
    memB_eqB_right G (opairB x y1) F
  have hF2 : memB (opairB x y2) G sqcap eqB G F <= memB (opairB x y2) F :=
    memB_eqB_right G (opairB x y2) F
  have hGF : eqB F G = eqB G F := eqB_comm F G
  refine (isSingleValuedB_apply F x y1 y2).trans' ?_
  refine le_inf (le_inf (inf_le_of_left_le inf_le_right) ?_) ?_
  * refine hF1.trans' ?_
  rw [ <- hGF]
  exact le_inf (inf_le_of_right_le inf_le_left) (inf_le_of_left_le inf_le_left)
  * refine hF2.trans' ?_
  rw [ <- hGF]
  exact le_inf (inf_le_of_right_le inf_le_right) (inf_le_of_left_le inf_le_left)

theorem isTotalB_congr (F G X : AName.{u} A) :
  eqB F G sqcap isTotalB F X <= isTotalB G X := by
  refine le_iInf fun x => ?_
  rw [le_himp_iff]
  have htot : isTotalB F X sqcap memB x X <= bigcup y : AName A, memB (opairB x y) F :=
    isTotalB_apply F X x
  have hle : eqB F G sqcap isTotalB F X sqcap memB x X <=
    eqB F G sqcap bigcup y : AName A, memB (opairB x y) F :=
    le_inf (inf_le_of_left_le inf_le_left)
    (htot.trans' (le_inf (inf_le_of_left_le inf_le_right) inf_le_right))
  refine hle.trans ?_
  rw [inf_iSup_eq]
  refine iSup_le fun y => le_iSup_of_le y ?_
  rw [inf_comm]
  exact memB_eqB_right F (opairB x y) G

theorem isFunctionB_congr (F G X Y : AName.{u} A) :
  eqB F G sqcap isFunctionB F X Y <= isFunctionB G X Y := by
  unfold isFunctionB
  refine le_inf (le_inf ?sub ?sv) ?tot
  * exact (subsetB_of_eqB F G (prodB X Y)).trans'
    (le_inf inf_le_left (inf_le_of_right_le (inf_le_of_left_le inf_le_left)))
  * exact (isSingleValuedB_congr F G).trans'
    (le_inf inf_le_left (inf_le_of_right_le (inf_le_of_left_le inf_le_right)))
  * exact (isTotalB_congr F G X).trans'
    (le_inf inf_le_left (inf_le_of_right_le inf_le_right))

/-- {F in P^A(X x_A Y) | isFunctionB F X Y}^A. -/

```

```

noncomputable def funsB (X Y : AName.{u} A) : AName.{u} A :=
  sepB (powerB (prodB X Y)) (fun F => isFunctionB F X Y)

theorem memB_funsB (F X Y : AName.{u} A) :
  memB F (funsB X Y) = isFunctionB F X Y := by
  unfold funsB
  rw [memB_sepB (A := A) F (powerB (prodB X Y)) (fun G => isFunctionB G X Y)
    (fun G H => isFunctionB_congr G H X Y), memB_powerB]
  refine inf_eq_right.mpr ?_
  unfold isFunctionB
  exact inf_le_of_left_le inf_le_left

/-- Identity relation on `X`: `{ (x,x)^A | x in X }`. -/
noncomputable def idB (X : AName.{u} A) : AName.{u} A :=
  mk X.idx (fun i => opairB (X.child i) (X.child i)) (fun i => memB (X.child i) X)

/-- Relation composition `g comp f subseteq X x_A Z`. -/
noncomputable def compB (g f : AName.{u} A) (X Z : AName.{u} A) : AName.{u} A :=
  mk (X.idx x Z.idx)
    (fun p => opairB (X.child p.1) (Z.child p.2))
    (fun p => bigcup y : AName.{u} A,
      memB (opairB (X.child p.1) y) f sqcap memB (opairB y (Z.child p.2)) g)

theorem memB_opairB_idB (x y X : AName.{u} A) :
  memB (opairB x y) (idB X) = memB x X sqcap eqB x y := by
  unfold idB
  rw [memB_mk]
  refine le_antisymm ?fwd ?bwd
  * refine iSup_le fun i => ?_
    rw [eqB_opairB]
    have hx : eqB x (X.child i) sqcap memB (X.child i) X <= memB x X :=
      memB_eqB_left' (X.child i) X x
    have heq : eqB x (X.child i) sqcap eqB y (X.child i) <= eqB x y := by
      have : eqB y (X.child i) = eqB (X.child i) y :=
        eqB_comm (A := A) y (X.child i)
      rw [this]
      exact eqB_trans x (X.child i) y
    have h_1 : eqB x (X.child i) sqcap eqB y (X.child i) sqcap memB (X.child i) X <=
      eqB x (X.child i) sqcap memB (X.child i) X :=
      le_inf (inf_le_of_left_le inf_le_left) inf_le_right
    have h_2 : eqB x (X.child i) sqcap eqB y (X.child i) sqcap memB (X.child i) X <=
      eqB x (X.child i) sqcap eqB y (X.child i) :=
      inf_le_left
    exact le_inf (h_1.trans hx) (h_2.trans heq)
  * rw [memB_eq (x := x) (y := X), iSup_inf_eq]
    refine iSup_le fun i => ?_
    refine le_iSup_of_le i ?_
    rw [eqB_opairB]
    have hy : eqB x y sqcap eqB x (X.child i) <= eqB y (X.child i) := by
      have : eqB x y = eqB y x := eqB_comm (A := A) x y
      rw [this]
      exact eqB_trans y x (X.child i)
    have h_1 : eqB x (X.child i) sqcap X.val i sqcap eqB x y <= eqB x (X.child i) :=
      inf_le_of_left_le inf_le_left
    have h_2 : eqB x (X.child i) sqcap X.val i sqcap eqB x y <= eqB y (X.child i) :=
      hy.trans' (le_inf inf_le_right (inf_le_of_left_le inf_le_left))
    have h_3 : eqB x (X.child i) sqcap X.val i sqcap eqB x y <= memB (X.child i) X :=
      inf_le_of_left_le (inf_le_of_right_le (val_le_memB X i))
    exact le_inf (le_inf h_1 h_2) h_3

theorem isFunctionB_id (X : AName.{u} A) :
  isFunctionB (idB X) X X = top := by
  unfold isFunctionB

```

```

refine inf_eq_top_iff.mpr <inf_eq_top_iff.mpr <?sub, ?sv>, ?tot>
* unfold idB
  rw [subsetB_mk]
  refine iInf_eq_top.mpr fun i => himp_eq_top_iff.mpr ?_
  rw [memB_opairB_prodB, inf_idem]
* refine iInf_eq_top.mpr fun x => iInf_eq_top.mpr fun y1 =>
  iInf_eq_top.mpr fun y2 => himp_eq_top_iff.mpr ?_
  rw [memB_opairB_idB, memB_opairB_idB]
  have h : eqB x y1 sqcap eqB x y2 <= eqB y1 y2 := by
    rw [eqB_comm (x := x) (y := y1)]
    exact eqB_trans y1 x y2
  exact h.trans'
  (le_inf (inf_le_of_left_le inf_le_right) (inf_le_of_right_le inf_le_right))
* refine iInf_eq_top.mpr fun x => himp_eq_top_iff.mpr ?_
  refine le_iSup_of_le x ?_
  rw [memB_opairB_idB, eqB_self (A := A) x, inf_top_eq]

theorem memB_idB_funsB (X : AName.{u} A) :
  memB (idB X) (funsB X X) = top := by
  rw [memB_funsB, isFunctionB_id]

theorem memB_opairB_compB_le (g f : AName.{u} A) (X Z x z : AName.{u} A) :
  memB (opairB x z) (compB g f X Z) <=
    bigcup y : AName.{u} A, memB (opairB x y) f sqcap memB (opairB y z) g := by
  unfold compB
  rw [memB_mk]
  refine iSup_le fun p => ?_
  rw [eqB_opairB, inf_iSup_eq]
  refine iSup_le fun y => ?_
  refine le_iSup_of_le y ?_
  have hx : eqB x (X.child p.1) sqcap memB (opairB (X.child p.1) y) f <=
    memB (opairB x y) f := by
    have heq : eqB (opairB x y) (opairB (X.child p.1) y) = eqB x (X.child p.1) := by
      rw [eqB_opairB, eqB_self (A := A) y, inf_top_eq]
    rw [← heq]
    exact memB_eqB_left' (opairB (X.child p.1) y) f (opairB x y)
  have hz : eqB z (Z.child p.2) sqcap memB (opairB y (Z.child p.2)) g <=
    memB (opairB y z) g := by
    have heq : eqB (opairB y z) (opairB y (Z.child p.2)) = eqB z (Z.child p.2) := by
      rw [eqB_opairB, eqB_self (A := A) y, top_inf_eq]
    rw [← heq]
    exact memB_eqB_left' (opairB y (Z.child p.2)) g (opairB y z)
  refine le_inf ?_ ?_
* exact hx.trans' (le_inf (inf_le_of_left_le inf_le_left) (inf_le_of_right_le inf_le_left))
* exact hz.trans' (le_inf (inf_le_of_left_le inf_le_right)
  (inf_le_of_right_le inf_le_right))

theorem inf_iSup_iSup {α : Type*} (p : A) (a : α → A) (b : α → A) :
  p sqcap (bigcup i, a i) sqcap (bigcup k, b k) = bigcup i, bigcup k, p sqcap a
  i sqcap b k := by
  have h1 : p sqcap (bigcup i, a i) sqcap (bigcup k, b k) = (p sqcap bigcup k, b k)
    sqcap bigcup i, a i := by
    ac_rfl
  rw [h1, inf_iSup_eq]
  refine iSup_congr fun i => ?_
  have h2 : (p sqcap bigcup k, b k) sqcap a i = (p sqcap a i) sqcap bigcup k, b k
    := by
    ac_rfl
  rw [h2, inf_iSup_eq]

theorem le_memB_opairB_compB (g f : AName.{u} A) (X Y Z x y z : AName.{u} A)
  (hf : subsetB f (prodB X Y) = top) (hg : subsetB g (prodB Y Z) = top) :
  memB (opairB x y) f sqcap memB (opairB y z) g <=

```

```

    memB (opairB x z) (compB g f X Z) := by
have hfmem : memB (opairB x y) f <= memB x X sqcap memB y Y := by
  have := memB_of_subsetB (opairB x y) f (prodB X Y)
  rwa [hf, inf_top_eq, memB_opairB_prodB] at this
have hgmem : memB (opairB y z) g <= memB y Y sqcap memB z Z := by
  have := memB_of_subsetB (opairB y z) g (prodB Y Z)
  rwa [hg, inf_top_eq, memB_opairB_prodB] at this
have hx : memB (opairB x y) f sqcap memB (opairB y z) g <= memB x X :=
  inf_le_of_left_le (hfmem.trans inf_le_left)
have hz : memB (opairB x y) f sqcap memB (opairB y z) g <= memB z Z :=
  inf_le_of_right_le (hgmem.trans inf_le_right)
have hkeep : memB (opairB x y) f sqcap memB (opairB y z) g <=
  memB (opairB x y) f sqcap memB (opairB y z) g sqcap memB x X sqcap memB z Z :=
  le_inf (le_inf le_refl hx) hz
rw [memB_eq (x := x) (y := X), memB_eq (x := z) (y := Z),
  inf_iSup_iSup (A := A)] at hkeep
refine hkeep.trans ?_
refine iSup_le fun i => iSup_le fun k => ?_
unfold compB
rw [memB_mk]
refine le_iSup_of_le (i, k) ?_
rw [eqB_opairB]
have hxF : eqB x (X.child i) sqcap memB (opairB x y) f <=
  memB (opairB (X.child i) y) f := by
  have heq : eqB (opairB x y) (opairB (X.child i) y) = eqB x (X.child i) := by
    rw [eqB_opairB, eqB_self (A := A) y, inf_top_eq]
  rw [← heq, inf_comm]
  exact memB_eqB_left (opairB x y) f (opairB (X.child i) y)
have hzG : eqB z (Z.child k) sqcap memB (opairB y z) g <=
  memB (opairB y (Z.child k)) g := by
  have heq : eqB (opairB y z) (opairB y (Z.child k)) = eqB z (Z.child k) := by
    rw [eqB_opairB, eqB_self (A := A) y, top_inf_eq]
  rw [← heq, inf_comm]
  exact memB_eqB_left (opairB y z) g (opairB y (Z.child k))
have hp : memB (opairB x y) f sqcap memB (opairB y z) g sqcap
  (eqB x (X.child i) sqcap X.val i) sqcap (eqB z (Z.child k) sqcap Z.val k) <=
  memB (opairB x y) f sqcap memB (opairB y z) g :=
  inf_le_of_left_le inf_le_left
have ha : memB (opairB x y) f sqcap memB (opairB y z) g sqcap
  (eqB x (X.child i) sqcap X.val i) sqcap (eqB z (Z.child k) sqcap Z.val k) <=
  eqB x (X.child i) :=
  inf_le_of_left_le (inf_le_of_right_le inf_le_left)
have hb : memB (opairB x y) f sqcap memB (opairB y z) g sqcap
  (eqB x (X.child i) sqcap X.val i) sqcap (eqB z (Z.child k) sqcap Z.val k) <=
  eqB z (Z.child k) :=
  inf_le_of_right_le inf_le_left
refine le_inf (le_inf ha hb) ?_
refine le_iSup_of_le y (le_inf ?_ ?_)
* exact hxF.trans' (le_inf ha (hp.trans inf_le_left))
* exact hzG.trans' (le_inf hb (hp.trans inf_le_right))

theorem isFunctionB_subset {F X Y : AName.{u} A} (h : isFunctionB F X Y = top) :
  subsetB F (prodB X Y) = top :=
  (inf_eq_top_iff.mp (inf_eq_top_iff.mp h).1).1

theorem isFunctionB_single {F X Y : AName.{u} A} (h : isFunctionB F X Y = top) :
  isSingleValuedB F = top :=
  (inf_eq_top_iff.mp (inf_eq_top_iff.mp h).1).2

theorem isFunctionB_total {F X Y : AName.{u} A} (h : isFunctionB F X Y = top) :
  isTotalB F X = top :=
  (inf_eq_top_iff.mp h).2

```

```

theorem isFunctionB_comp {X Y Z f g : AName.{u} A}
  (hf : isFunctionB f X Y = top) (hg : isFunctionB g Y Z = top) :
  isFunctionB (compB g f X Z) X Z = top := by
  unfold isFunctionB
  refine inf_eq_top_iff.mpr <inf_eq_top_iff.mpr <?sub, ?sv>, ?tot>
  * unfold compB
  rw [subsetB_mk]
  refine iInf_eq_top.mpr fun p => himp_eq_top_iff.mpr ?_
  refine iSup_le fun y => ?_
  have hfmem : memB (opairB (X.child p.1) y) f <=
    memB (X.child p.1) X sqcap memB y Y := by
    have := memB_of_subsetB (opairB (X.child p.1) y) f (prodB X Y)
    rwa [isFunctionB_subset hf, inf_top_eq, memB_opairB_prodB] at this
  have hgmem : memB (opairB y (Z.child p.2)) g <=
    memB y Y sqcap memB (Z.child p.2) Z := by
    have := memB_of_subsetB (opairB y (Z.child p.2)) g (prodB Y Z)
    rwa [isFunctionB_subset hg, inf_top_eq, memB_opairB_prodB] at this
  rw [memB_opairB_prodB]

```

Lean 4 source (lines 2001–2400)

```

exact le_inf (inf_le_of_left_le (hfmem.trans inf_le_left))
  (inf_le_of_right_le (hgmem.trans inf_le_right))
* refine iInf_eq_top.mpr fun x => iInf_eq_top.mpr fun z1 =>
  iInf_eq_top.mpr fun z2 => himp_eq_top_iff.mpr ?_
  have hle1 := memB_opairB_compB_le (A := A) g f X Z x z1
  have hle2 := memB_opairB_compB_le (A := A) g f X Z x z2
  have hsvf : forall y1 y2 : AName A,
    memB (opairB x y1) f sqcap memB (opairB x y2) f <= eqB y1 y2 := fun y1 y2 =>
    (isSingleValuedB_apply f x y1 y2).trans'
    (le_inf (le_inf (le_top.trans (isFunctionB_single hf).ge) inf_le_left) inf_le_right)
  have hsvg : forall y z1' z2' : AName A,
    memB (opairB y z1') g sqcap memB (opairB y z2') g <= eqB z1' z2' := fun y z1' z2'
    =>
    (isSingleValuedB_apply g y z1' z2').trans'
    (le_inf (le_inf (le_top.trans (isFunctionB_single hg).ge) inf_le_left) inf_le_right)
  refine (inf_le_inf hle1 hle2).trans ?_
  rw [iSup_inf_eq]
  refine iSup_le fun y1 => ?_
  rw [inf_iSup_eq]
  refine iSup_le fun y2 => ?_
  have hy : memB (opairB x y1) f sqcap memB (opairB x y2) f <= eqB y1 y2 := hsvf y1 y2
  have hsubst : eqB y1 y2 sqcap memB (opairB y2 z2) g <= memB (opairB y1 z2) g := by
    have heq : eqB (opairB y1 z2) (opairB y2 z2) = eqB y1 y2 := by
      rw [eqB_opairB, eqB_self (A := A) z2, inf_top_eq]
    rw [← heq]
  exact memB_eqB_left' (opairB y2 z2) g (opairB y1 z2)
  have hgpair : memB (opairB y1 z1) g sqcap memB (opairB y1 z2) g <= eqB z1 z2 :=
    hsvg y1 z1 z2
  have hproj :
    memB (opairB x y1) f sqcap memB (opairB y1 z1) g sqcap
    (memB (opairB x y2) f sqcap memB (opairB y2 z2) g) <=
    memB (opairB y1 z1) g sqcap memB (opairB y1 z2) g := by
    refine le_inf (inf_le_of_left_le inf_le_right) ?_
    refine hsubst.trans' ?_
    refine le_inf ?_ (inf_le_of_right_le inf_le_right)
    exact hy.trans' (le_inf (inf_le_of_left_le inf_le_left) (inf_le_of_right_le inf_le_left))
  exact hgpair.trans' hproj
* refine iInf_eq_top.mpr fun x => himp_eq_top_iff.mpr ?_
  have hftot : memB x X <= bigcup y : AName A, memB (opairB x y) f :=
    (isTotalB_apply f X x).trans' (le_inf (le_top.trans (isFunctionB_total hf).ge) le_rfl)
  refine hftot.trans ?_
  refine iSup_le fun y => ?_
  have hyY : memB (opairB x y) f <= memB y Y := by

```

```

    have := memB_of_subsetB (opairB x y) f (prodB X Y)
    have h := this.trans (le_of_eq (by rw [memB_opairB_prodB]))
    exact (h.trans' (le_inf le_rfl (le_top.trans (isFunctionB_subset hf).ge))).trans
      inf_le_right
    have hgtot : memB y Y <= bigcup z : AName A, memB (opairB y z) g :=
      (isTotalB_apply g Y y).trans' (le_inf (le_top.trans (isFunctionB_total hg).ge) le_rfl)
    have : memB (opairB x y) f <= memB (opairB x y) f sqcap memB y Y :=
      le_inf le_rfl hyY
    refine this.trans ?_
    refine (inf_le_inf_left _ hgtot).trans ?_
    rw [inf_iSup_eq]
    refine iSup_le fun z => ?_
    refine (le_memB_opairB_compB (A := A) g f X Y Z x y z
      (isFunctionB_subset hf) (isFunctionB_subset hg)).trans ?_
    exact le_iSup (fun z' : AName A => memB (opairB x z') (compB g f X Z)) z

theorem compB_congr {X Z f f' g g' : AName.{u} A}
  (hf : eqB f f' = top) (hg : eqB g g' = top) :
  eqB (compB g f X Z) (compB g' f' X Z) = top := by
  have hval : (fun p : X.idx x Z.idx =>
    bigcup y : AName A, memB (opairB (X.child p.1) y) f sqcap
    memB (opairB y (Z.child p.2)) g) =
    fun p => bigcup y : AName A, memB (opairB (X.child p.1) y) f' sqcap
    memB (opairB y (Z.child p.2)) g' := by
    funext p
    refine iSup_congr fun y => ?_
    rw [eqB_top_memB_right (x := f) (y := f') (z := opairB (X.child p.1) y) hf,
      eqB_top_memB_right (x := g) (y := g') (z := opairB y (Z.child p.2)) hg]
  have heq : compB g f X Z = compB g' f' X Z := by
    unfold compB
    exact congr_arg (fun v => mk (X.idx x Z.idx)
      (fun p => opairB (X.child p.1) (Z.child p.2)) v) hval
  rw [heq, eqB_self]

/-- Boolean equality at value 1 is an equivalence of names. -/
def nameSetoid : Setoid (AName.{u} A) where
  r F G := eqB (A := A) F G = top
  iseqv := {
    refl := fun F => eqB_self (A := A) F
    symm := fun {F G} h => by rw [eqB_comm (x := F) (y := G)] at h; exact h
    trans := fun {F G H} hFG hGH => by
      have htop : eqB (A := A) F G sqcap eqB G H = top := by rw [hFG, hGH, top_inf_eq]
      exact top_unique (htop.ge.trans (eqB_trans (A := A) F G H))
  }

/-- A name that is a function `X -> A Y` at Boolean value 1. -/
abbrev HomName (X Y : AName.{u} A) : Type (u + 1) :=
  { F : AName.{u} A // memB F (funB X Y) = top }

/-- `Set_A(X, Y)` : function names at Boolean value 1, modulo `?F = G? = 1`. -/
def homB (X Y : AName.{u} A) : Type (u + 1) :=
  Quotient (Setoid.comap (fun F : HomName (A := A) X Y => F.1) nameSetoid)

theorem isHom_id (X : AName.{u} A) : memB (idB X) (funB X X) = top :=
  memB_idB_funB X

theorem isHom_comp {X Y Z f g : AName.{u} A}
  (hf : memB f (funB X Y) = top) (hg : memB g (funB Y Z) = top) :
  memB (compB g f X Z) (funB X Z) = top := by
  rw [memB_funB] at hf hg |-
  exact isFunctionB_comp hf hg

/-!

```



```
## `?_Set(V^A)` and CSL Theorem 1(i)-(ii)
```

The paper's language of set theory with constants from V^A is the first-order language with in and = , evaluated at an assignment of A -names. Bounded Δ_0 formulas remain Δ_0 Formula. Unbounded quantifiers are SetFormula.ex and SetFormula.all , interpreted as joins and meets (CSL S2).

```

/-- First-order language of set theory with `n` free variables. Constants from
`V^A` appear as values of the assignment (CSL p.3: `?_Set(V^A)`). -/
inductive SetFormula : Nat -> Type
| mem {n} (i j : Fin n) : SetFormula n
| eq {n} (i j : Fin n) : SetFormula n
| not {n} : SetFormula n -> SetFormula n
| and {n} : SetFormula n -> SetFormula n -> SetFormula n
| ex {n} : SetFormula (n + 1) -> SetFormula n
| all {n} : SetFormula (n + 1) -> SetFormula n

namespace SetFormula

/-- Rename free variables. Under a binder, index `0` stays bound. -/
def rename : forall {n m}, (Fin n -> Fin m) -> SetFormula n -> SetFormula m
| _, _, sigma, .mem i j => .mem (sigma i) (sigma j)
| _, _, sigma, .eq i j => .eq (sigma i) (sigma j)
| _, _, sigma, .not phi => .not (rename sigma phi)
| _, _, sigma, .and phi psi => .and (rename sigma phi) (rename sigma psi)
| _, _, sigma, .ex phi => .ex (rename (Fin.cons 0 (Fin.succ comp sigma)) phi)
| _, _, sigma, .all phi => .all (rename (Fin.cons 0 (Fin.succ comp sigma)) phi)

/-- Weaken: the new variable is `0`, old free variables shift. -/
def lift {n} (phi : SetFormula n) : SetFormula (n + 1) :=
  rename Fin.succ phi

/-- Substitute free variable `0` by the free variable `t`. -/
def inst {n} (phi : SetFormula (n + 1)) (t : Fin n) : SetFormula n :=
  rename (Fin.cons t id) phi

def or {n} (phi psi : SetFormula n) : SetFormula n :=
  .not (.and phi.not psi.not)

def implies {n} (phi psi : SetFormula n) : SetFormula n :=
  phi.not.or psi

def iff {n} (phi psi : SetFormula n) : SetFormula n :=
  (phi.implies psi).and (psi.implies phi)

/-- Boolean value of a formula of `?_Set(V^A)` at a name assignment. -/
noncomputable def bval {A : Type u} [CompleteBooleanAlgebra A] :
  forall {n}, SetFormula n -> (Fin n -> AName.{u} A) -> A
| _, .mem i j, ? => memB (? i) (? j)
| _, .eq i j, ? => eqB (? i) (? j)
| _, .not phi, ? => (bval phi) ?
| _, .and phi psi, ? => bval phi ? sqcup bval psi ?
| _, .ex phi, ? => bigcup x : AName.{u} A, bval phi (consName x ?)
| _, .all phi, ? => ? x : AName.{u} A, bval phi (consName x ?)

variable {A : Type u} [CompleteBooleanAlgebra A]

@[simp] theorem bval_not {n} (phi : SetFormula n) (? : Fin n -> AName.{u} A) :
  bval (.not phi) ? = (bval phi) ? := rfl
@[simp] theorem bval_and {n} (phi psi : SetFormula n) (? : Fin n -> AName.{u} A) :
  bval (.and phi psi) ? = bval phi ? sqcup bval psi ? := rfl
@[simp] theorem bval_ex {n} (phi : SetFormula (n + 1)) (? : Fin n -> AName.{u} A) :

```

```

    bval (.ex phi) ? = bigcup x : AName.{u} A, bval phi (consName x ?) := rfl
@[simp] theorem bval_all {n} (phi : SetFormula (n + 1)) (? : Fin n -> AName.{u} A) :
    bval (.all phi) ? = ? x : AName.{u} A, bval phi (consName x ?) := rfl
@[simp] theorem bval_mem {n} (i j : Fin n) (? : Fin n -> AName.{u} A) :
    bval (.mem i j) ? = memB (? i) (? j) := rfl
@[simp] theorem bval_eq {n} (i j : Fin n) (? : Fin n -> AName.{u} A) :
    bval (.eq i j) ? = eqB (? i) (? j) := rfl

theorem bval_or {n} (phi psi : SetFormula n) (? : Fin n -> AName.{u} A) :
    bval (or phi psi) ? = bval phi ? sqsup bval psi ? := by
    simp [or, compl_inf, compl_compl]

theorem bval_implies {n} (phi psi : SetFormula n) (? : Fin n -> AName.{u} A) :
    bval (implies phi psi) ? = bval phi ? ? bval psi ? := by
    rw [implies, bval_or, bval_not, himp_eq, sup_comm]

theorem bval_iff {n} (phi psi : SetFormula n) (? : Fin n -> AName.{u} A) :
    bval (iff phi psi) ? = (bval phi ? ? bval psi ?) sqcap (bval psi ? ? bval phi ?) := by
    simp [iff, bval_implies]

theorem bval_rename {n m} (sigma : Fin n -> Fin m) (phi : SetFormula n)
    (? : Fin m -> AName.{u} A) :
    bval (rename sigma phi) ? = bval phi (fun i => ? (sigma i)) := by
    induction phi generalizing m ? with
    | mem i j => rfl
    | eq i j => rfl
    | not phi ih => simp [rename, ih]
    | and phi psi ihphi ihpsi => simp [rename, ihphi, ihpsi]
    | ex phi ih =>
        simp only [rename, bval_ex]
        refine iSup_congr fun x => ?_
        rw [ih]
        congr 1
        funext i
        exact Fin.cases (by simp [consName]) (fun i => by simp [consName]) i
    | all phi ih =>
        simp only [rename, bval_all]
        refine iInf_congr fun x => ?_
        rw [ih]
        congr 1
        funext i
        exact Fin.cases (by simp [consName]) (fun i => by simp [consName]) i

theorem bval_lift {n} (phi : SetFormula n) (x : AName.{u} A)
    (? : Fin n -> AName.{u} A) :
    bval (lift phi) (consName x ?) = bval phi ? := by
    simp [lift, bval_rename, consName]

theorem bval_inst {n} (phi : SetFormula (n + 1)) (t : Fin n)
    (? : Fin n -> AName.{u} A) :
    bval (inst phi t) ? = bval phi (consName (? t) ?) := by
    simp [inst, bval_rename]
    congr 1
    funext i
    exact Fin.cases (by simp [consName]) (fun i => by simp [consName]) i

/-- Equality of names is a congruence for Boolean values of `?_Set` formulas. -/
theorem bval_congr {n : Nat} (phi : SetFormula n) (? sigma : Fin n -> AName.{u} A) :
    (? i, eqB (? i) (sigma i)) sqcap bval phi ? <= bval phi sigma := by
    induction phi with
    | mem i j =>
        have hij : (? k, eqB (? k) (sigma k)) <= eqB (? i) (sigma i) sqcap eqB (? j) (sigma j)
        :=

```

```

    le_inf (iInf_le _ i) (iInf_le _ j)
  refine (inf_le_inf_right (memB (? i) (? j)) hij).trans ?_
  have h_1 : eqB (? i) (sigma i) sqcap memB (? i) (? j) <= memB (sigma i) (? j) := by
    rw [inf_comm]; exact memB_eqB_left (? i) (? j) (sigma i)
  have h_2 : memB (sigma i) (? j) sqcap eqB (? j) (sigma j) <= memB (sigma i) (sigma j)
  :=
    memB_eqB_right (? j) (sigma i) (sigma j)
  refine le_trans ?_ h_2
  refine le_inf ?_ ?_
  * refine le_trans ?_ h_1
    exact le_inf (inf_le_of_left_le inf_le_left) inf_le_right
  * exact inf_le_of_left_le inf_le_right
| eq i j =>
  have hij : (? k, eqB (? k) (sigma k)) <= eqB (? i) (sigma i) sqcap eqB (? j) (sigma j)
  :=
    le_inf (iInf_le _ i) (iInf_le _ j)
  refine (inf_le_inf_right (eqB (? i) (? j)) hij).trans ?_
  have h_1 : eqB (sigma i) (? i) sqcap eqB (? i) (? j) <= eqB (sigma i) (? j) :=
    eqB_trans (sigma i) (? i) (? j)
  have h_2 : eqB (sigma i) (? j) sqcap eqB (? j) (sigma j) <= eqB (sigma i) (sigma j) :=
    eqB_trans (sigma i) (? j) (sigma j)
  refine le_trans ?_ h_2
  refine le_inf ?_ ?_
  * refine le_trans ?_ h_1
    rw [eqB_comm (x := ? i) (y := sigma i)]
    exact le_inf (inf_le_of_left_le inf_le_left) inf_le_right
  * exact inf_le_of_left_le inf_le_right
| not phi ih =>
  rw [bval_not, bval_not, inf_compl_le_compl_iff]
  have hcomm : (? i, eqB (sigma i) (? i)) = ? i, eqB (? i) (sigma i) :=
    iInf_congr fun i => eqB_comm (sigma i) (? i)
  simp [hcomm] using ih sigma ?
| and phi psi ihphi ihpsi =>
  rw [bval_and, bval_and]
  refine le_inf ?_ ?_
  * exact (inf_le_inf_left _ inf_le_left).trans (ihphi ? sigma)
  * exact (inf_le_inf_left _ inf_le_right).trans (ihpsi ? sigma)
| ex phi ih =>
  rw [bval_ex, bval_ex, inf_iSup_eq (a := (? i, eqB (? i) (sigma i) : A))]
  refine iSup_le fun y => ?_
  refine le_trans ?_ (le_iSup
    (fun y' : AName A => bval phi (consName y' sigma)) y)
  have hcons := eqB_iInf_cons (A := A) y ? sigma
  have := ih (consName y ?) (consName y sigma)
  simp [hcons] using this
| all phi ih =>
  rw [bval_all, bval_all]
  refine le_iInf fun y => ?_
  have hcons := eqB_iInf_cons (A := A) y ? sigma
  have := ih (consName y ?) (consName y sigma)
  refine le_trans ?_ this
  refine le_inf ?_ ?_
  * rw [← hcons]
    exact inf_le_of_left_le le_rfl
  * exact inf_le_of_right_le (iInf_le _ y)

theorem bval_subst {n : Nat} (phi : SetFormula (n + 1)) (x y : AName.{u} A)
  (? : Fin n -> AName.{u} A) :
  eqB x y sqcap bval phi (consName x ?) <= bval phi (consName y ?) := by
  have h := bval_congr phi (consName x ?) (consName y ?)
  have hcons : (? i, eqB (consName x ? i) (consName y ? i)) = eqB x y := by
    rw [iInf_fin_succ (fun i => eqB (consName x ? i) (consName y ? i))]
  simp [eqB_self]

```

```

    rwa [hcons] at h

theorem himp_iInf_eq {? : Sort*} (a : A) (f : ? -> A) :
  a ? ? i, f i = ? i, a ? f i :=
  le_antisymm
    (le_iInf fun i => himp_le_himp_left (iInf_le _ i))
    (le_himp_iff.mpr (le_iInf fun i =>
      ((inf_le_inf_right a (iInf_le (fun j => a ? f j) i)).trans himp_inf_le)))

theorem iInf_himp_le_himp_iInf {? : Sort*} (f g : ? -> A) :
  (? i, f i ? g i) <= (? i, f i) ? ? i, g i := by
  rw [le_himp_iff]
  refine le_iInf fun i =>
    ((inf_le_inf (iInf_le (fun j => f j ? g j) i) (iInf_le f i)).trans
      himp_inf_le)

/-- Modus ponens is sound for the Boolean valuation. -/
theorem mp_valid {n} (phi psi : SetFormula n) (? : Fin n -> AName.{u} A) :
  (himp : bval (implies phi psi) ? = top) (hphi : bval phi ? = top) :
  bval psi ? = top := by
  have : bval phi ? ? bval psi ? = top := by rwa [bval_implies] at himp
  exact top_unique ((himp_eq_top_iff.mp this).trans' hphi.ge)

/-- Universal generalization / instantiation for the Boolean valuation. -/
theorem all_valid_iff {n} (phi : SetFormula (n + 1)) (? : Fin n -> AName.{u} A) :
  bval (.all phi) ? = top <-> forall x, bval phi (consName x ?) = top :=
  iInf_eq_top

end SetFormula

open SetFormula

/-- CSL Theorem 1(ii): the inference rules of first-order logic are sound for
the Boolean valuation of  $\mathcal{V}^A$ . They apply to arbitrary assignments
(statements about elements of  $\mathcal{V}^A$ ), hence also to ZFC theorems (Theorem 1(i)).
The three clauses are modus ponens,  $\forall$ -introduction/elimination, and
substitution of equal names (Jech (14.9) and the paragraph after it). -/
theorem theorem_1_ii {n : Nat} (phi psi : SetFormula n) (? : Fin n -> AName.{u} A) :
  (bval (implies phi psi) ? = top -> bval phi ? = top -> bval psi ? = top) /\
  (forall chi : SetFormula (n + 1),
    bval (.all chi) ? = top <-> forall x, bval chi (consName x ?) = top) /\
  (forall (chi : SetFormula n) (sigma : Fin n -> AName.{u} A),
    (? i, eqB (? i) (sigma i)) sqcap bval chi ? <= bval chi sigma) :=
  <mp_valid phi psi ?, fun chi => all_valid_iff chi ?, fun chi sigma => bval_congr chi ? sigma>

/-- Jech Lemma 14.17:  $\mathcal{V}^A$  is extensional. -/
theorem jech_lemma_14_17 (X Y : AName.{u} A) :
  (? u : AName.{u} A, (memB u X ? memB u Y) sqcap (memB u Y ? memB u X)) <=
  eqB X Y := by
  have hsub (U V : AName A) :
    (? u : AName A, memB u U ? memB u V) <= subsetB U V := by
    refine le_iInf fun i => ?_
    have hch := iInf_le (fun u : AName A => memB u U ? memB u V) (U.child i)
    have hval : U.val i <= memB (U.child i) U := val_le_memB U i
    exact (himp_le_himp_right hval).trans' hch
  rw [eqB_eq_subset]
  refine le_inf ?_ ?_
  * exact (hsub X Y).trans' (iInf_mono fun _ => inf_le_left)
  * exact (hsub Y X).trans' (iInf_mono fun _ => inf_le_right)

theorem subsetB_eq_iInf (X Y : AName.{u} A) :
  subsetB X Y = ? u : AName.{u} A, memB u X ? memB u Y :=
  le_antisymm

```

```

(le_iInf fun u => le_himp_iff.mpr (by
  rw [inf_comm]; exact memB_of_subsetB u X Y))
(le_iInf fun i =>
  (iInf_le (fun u : AName.{u} A => memB u X ? memB u Y) (X.child i)).trans
    (himp_le_himp_right (val_le_memB X i)))

theorem eqB_eq_iInf (X Y : AName.{u} A) :
  eqB X Y = ? u : AName.{u} A, (memB u X ? memB u Y) sqcap (memB u Y ? memB u X) :=
  le_antisymm
    (le_iInf fun u => le_inf
      (le_himp_iff.mpr (by rw [inf_comm]; exact memB_eqB_right X u Y))
      (le_himp_iff.mpr (by
        rw [inf_comm, eqB_comm (x := X) (y := Y)]
        exact memB_eqB_right Y u X)))
      (jech_lemma_14_17 X Y))

/-!
## ZFC axioms in  $V^A$  (Jech Theorem 14.24)
-/

/-- Union name: domain is the disjoint union of the children's domains. -/
noncomputable def unionB (X : AName.{u} A) : AName.{u} A :=
  mk (Sigma i : X.idx, (X.child i).idx)
    (fun p => (X.child p.1).child p.2)
    (fun _ => top )

/-- Collection witness: one fullness realizer per child of  $X$ . -/
noncomputable def collectB (X : AName.{u} A) (phi : AName.{u} A -> AName.{u} A -> A)
  (hcongr : forall u v w, eqB v w sqcap phi u v <= phi u w) : AName.{u} A :=
  mk X.idx
    (fun i => Classical.choose (fullness (phi (X.child i)) (hcongr (X.child i))))
    (fun _ => top )

theorem collectB_spec (X : AName.{u} A) (phi : AName.{u} A -> AName.{u} A -> A)
  (hcongr : forall u v w, eqB v w sqcap phi u v <= phi u w) (i : X.idx) :
  phi (X.child i) ((collectB X phi hcongr).child i) = bigcup v, phi (X.child i) v :=
  Classical.choose_spec (fullness (phi (X.child i)) (hcongr (X.child i)))

def extensionalityAxiom : SetFormula 0 :=
  .all (.all (implies
    (.all (iff (.mem 0 2) (.mem 0 1)))
    (.eq 1 0)))

def pairingAxiom : SetFormula 0 :=
  .all (.all (.ex (.and (.mem 2 0) (.mem 1 0))))



### Lean 4 source (lines 2401–2800)



def unionAxiom : SetFormula 0 :=
  .all (.ex (.all (.all
    (implies (.mem 1 3) (implies (.mem 0 1) (.mem 0 2)))))

def powerAxiom : SetFormula 0 :=
  .all (.ex (.all (implies
    (.all (implies (.mem 0 1) (.mem 0 3)))
    (.mem 0 1))))

def infinityAxiom : SetFormula 0 :=
  .ex (.and
    (.ex (.and (.all (.not (.mem 0 1))) (.mem 0 1)))
    (.all (implies (.mem 0 1)
      (.ex (.and
        (.all (iff (.mem 0 1) (.or (.mem 0 2) (.eq 0 2))))
        (.mem 0 2)))))

```

```

def regularityAxiom : SetFormula 0 :=
  .all (implies
    (.ex (.mem 0 1))
    (.ex (.and (.mem 0 1)
      (.all (implies (.mem 0 1) (.not (.mem 0 2)))))))

/-- Parameter shift for Separation: `z, params |-> z, Y, X, params`. -/
def sepRename {n} : Fin (n + 1) -> Fin (n + 3) :=
  Fin.cases 0 (fun i => i.addNat 3)

def separationAxiom {n} (phi : SetFormula (n + 1)) : SetFormula n :=
  .all (.ex (.all (iff (.mem 0 1) (.and (.mem 0 2) (rename sepRename phi)))))

/-- Parameter shift for Collection: `v, u, params |-> v, u, Y, X, params`. -/
def colRename {n} : Fin (n + 2) -> Fin (n + 4) :=
  Fin.cases 0 (Fin.cases 1 (fun i => i.addNat 4))

def collectionAxiom {n} (phi : SetFormula (n + 2)) : SetFormula n :=
  .all (.ex (.all (implies (.mem 0 2)
    (implies (.ex (rename colRename phi))
      (.ex (.and (.mem 0 2) (rename colRename phi)))))))

/-- `z = {a}` as `forall w (w in z <-> w = a)`. -/
def isSingletonF {n} (z a : Fin n) : SetFormula n :=
  .all (iff (.mem 0 z.succ) (.eq 0 a.succ))

/-- `z = {a, b}`. -/
def isUPairF {n} (z a b : Fin n) : SetFormula n :=
  .all (iff (.mem 0 z.succ) (.or (.eq 0 a.succ) (.eq 0 b.succ)))

/-- `p = <a, b>` (Kuratowski). -/
def isOPairF {n} (p a b : Fin n) : SetFormula n :=
  .all (iff (.mem 0 p.succ) (.or (isSingletonF 0 a.succ) (isUPairF 0 a.succ b.succ)))

/-- ` in r`. -/
def opairMemF {n} (a b r : Fin n) : SetFormula n :=
  .ex (.and (isOPairF 0 a.succ b.succ) (.mem 0 r.succ))

/-- `R` well-orders `X` (free variables `0 = R`, `1 = X`). -/
def wellOrderAxiom : SetFormula 2 :=
  let relOn : SetFormula 2 :=
    .all (.all (implies (opairMemF 1 0 2) (.and (.mem 1 3) (.mem 0 3))))
  let refl : SetFormula 2 :=
    .all (implies (.mem 0 2) (opairMemF 0 0 1))
  let antisym : SetFormula 2 :=
    .all (.all (implies (.and (opairMemF 1 0 2) (opairMemF 0 1 2)) (.eq 1 0)))
  let total : SetFormula 2 :=
    .all (.all (implies (.and (.mem 1 3) (.mem 0 3))
      (.or (opairMemF 1 0 2) (opairMemF 0 1 2))))
  let trans : SetFormula 2 :=
    .all (.all (.all (implies
      (.and (opairMemF 2 1 3) (opairMemF 1 0 3))
      (opairMemF 2 0 3))))
  let least : SetFormula 2 :=
    .all (implies
      (.and (.all (implies (.mem 0 1) (.mem 0 3))) (.ex (.mem 0 1)))
      (.ex (.and (.mem 0 1)
        (.all (implies (.mem 0 2) (opairMemF 1 0 3))))))
  relOn.and (refl.and (antisym.and (total.and (trans.and least))))

def choiceAxiom : SetFormula 0 :=
  .all (.ex wellOrderAxiom)

```

```

def eqLeibnizRenameX {n} : Fin (n + 1) -> Fin (n + 2) :=
  Fin.cases 1 (fun i => i.succ.succ)

def eqLeibnizRenameY {n} : Fin (n + 1) -> Fin (n + 2) :=
  Fin.cases 0 (fun i => i.succ.succ)

/-- `forall x forall y (x = y -> (phi(x) -> phi(y)))`. -/
def eqLeibnizAxiom {n} (phi : SetFormula (n + 1)) : SetFormula n :=
  .all (.all (implies (.eq 1 0)
    (implies (rename eqLeibnizRenameX phi) (rename eqLeibnizRenameY phi))))

inductive ZFCaxiom : {n : Nat} -> SetFormula n -> Prop
| extensionality : ZFCaxiom extensionalityAxiom
| pairing : ZFCaxiom pairingAxiom
| union : ZFCaxiom unionAxiom
| power : ZFCaxiom powerAxiom
| infinity : ZFCaxiom infinityAxiom
| regularity : ZFCaxiom regularityAxiom
| choice : ZFCaxiom choiceAxiom
| separation {n} (phi : SetFormula (n + 1)) : ZFCaxiom (separationAxiom phi)
| collection {n} (phi : SetFormula (n + 2)) : ZFCaxiom (collectionAxiom phi)

/-- Hilbert-style first-order deduction from the ZFC axioms. -/
inductive ZFCProvable : {n : Nat} -> SetFormula n -> Prop
| ax {n} {phi : SetFormula n} : ZFCaxiom phi -> ZFCProvable phi
| mp {n} {phi psi : SetFormula n} :
  ZFCProvable (implies phi psi) -> ZFCProvable phi -> ZFCProvable psi
| gen {n} {phi : SetFormula (n + 1)} :
  ZFCProvable phi -> ZFCProvable (.all phi)
| hilbertK {n} (phi psi : SetFormula n) :
  ZFCProvable (implies phi (implies psi phi))
| hilbertS {n} (phi psi chi : SetFormula n) :
  ZFCProvable (implies (implies phi (implies psi chi))
    (implies (implies phi psi) (implies phi chi)))
| hilbertDNE {n} (phi psi : SetFormula n) :
  ZFCProvable (implies (implies phi.not psi.not) (implies psi phi))
| allImp {n} (phi psi : SetFormula (n + 1)) :
  ZFCProvable (implies (.all (implies phi psi))
    (implies (.all phi) (.all psi)))
| allVac {n} (phi : SetFormula n) (psi : SetFormula (n + 1)) :
  ZFCProvable (implies (.all (implies phi.lift psi)) (implies phi (.all psi)))
| allInst {n} (phi : SetFormula (n + 1)) (t : Fin n) :
  ZFCProvable (implies (.all phi) (inst phi t))
| eqRef1 : ZFCProvable (.all (.eq 0 0))
| eqLeibniz {n} (phi : SetFormula (n + 1)) :
  ZFCProvable (eqLeibnizAxiom phi)

theorem memB_unionB_of_mem (X u v : AName.{u} A) :
  memB u X sqcap memB v u <= memB v (unionB X) := by
  rw [memB_eq (x := u) (y := X), iSup_inf_eq]
  refine iSup_le fun i => ?_
  have hvu : eqB u (X.child i) sqcap memB v u <= memB v (X.child i) := by
    rw [inf_comm]; exact memB_eqB_right u v (X.child i)
  have hto : eqB u (X.child i) sqcap X.val i sqcap memB v u <= memB v (X.child i) :=
    hvu.trans' (le_inf (inf_le_of_left_le inf_le_left) inf_le_right)
  refine hto.trans ?_
  rw [memB_eq (x := v) (y := X.child i)]
  refine iSup_le fun j => ?_
  unfold unionB
  rw [memB_mk]
  refine le_iSup_of_le <i, j> ?_
  exact le_inf inf_le_left le_top

```

```

theorem axiom_extensionality_valid (? : Fin 0 -> AName.{u} A) :
  bval extensionalityAxiom ? = top := by
  refine iInf_eq_top.mpr fun X => iInf_eq_top.mpr fun Y => ?_
  rw [bval_implies, himp_eq_top_iff]
  have hx : consName Y (consName X ?) (1 : Fin 2) = X := rfl
  have hy : consName Y (consName X ?) (0 : Fin 2) = Y := rfl
  simp only [bval_eq, hx, hy]
  refine (eqB_eq_iInf X Y).ge.trans' (le_of_eq (iInf_congr fun u => ?_))
  have hx' : consName u (consName Y (consName X ?)) (2 : Fin 3) = X := rfl
  have hy' : consName u (consName Y (consName X ?)) (1 : Fin 3) = Y := rfl
  simp [bval_iff, bval_mem, hx', hy']

theorem addNat_succ' {n m} (i : Fin n) :
  i.addNat (m + 1) = (i.addNat m).succ :=
  Fin.ext (by simp [Fin.addNat]; ac_rfl)

omit [CompleteBooleanAlgebra A] in
theorem consName_addNat3 {n} (z Y X : AName.{u} A) (? : Fin n -> AName.{u} A)
  (i : Fin n) :
  consName z (consName Y (consName X ?)) (i.addNat 3) = ? i := by
  rw [show i.addNat 3 = (i.addNat 2).succ from addNat_succ' (m := 2) i,
    consName_succ,
    show i.addNat 2 = (i.addNat 1).succ from addNat_succ' (m := 1) i,
    consName_succ,
    show i.addNat 1 = i.succ from addNat_succ' (m := 0) i,
    consName_succ]

theorem bval_ex_eq_top_of {n} {phi : SetFormula (n + 1)}
  {? : Fin n -> AName.{u} A} (x : AName.{u} A)
  (hx : SetFormula.bval phi (consName x ?) = top) :
  SetFormula.bval (.ex phi) ? = top :=
  top_unique (hx.ge.trans (le_iSup (fun y : AName.{u} A =>
    SetFormula.bval phi (consName y ?)) x))

theorem axiom_pairing_valid (? : Fin 0 -> AName.{u} A) :
  bval pairingAxiom ? = top := by
  unfold pairingAxiom
  rw [all_valid_iff]
  intro x
  rw [all_valid_iff]
  intro y
  refine bval_ex_eq_top_of (pairB x y) ?_
  have hx : consName (pairB x y) (consName y (consName x ?)) (2 : Fin 3) = x :=
    rfl
  have hy : consName (pairB x y) (consName y (consName x ?)) (1 : Fin 3) = y :=
    rfl
  have hz : consName (pairB x y) (consName y (consName x ?)) (0 : Fin 3) =
    pairB x y := rfl
  simp [SetFormula.bval_and, SetFormula.bval_mem, hx, hy, hz, memB_pairB,
    eqB_self]

theorem axiom_union_valid (? : Fin 0 -> AName.{u} A) :
  bval unionAxiom ? = top := by
  unfold unionAxiom
  rw [all_valid_iff]
  intro X
  refine bval_ex_eq_top_of (unionB X) ?_
  rw [all_valid_iff]
  intro u
  rw [all_valid_iff]
  intro v
  rw [SetFormula.bval_implies, SetFormula.bval_implies, himp_eq_top_iff,

```



```

    le_himp_iff]
have hX : consName v (consName u (consName (unionB X) (consName X ?)))
  (3 : Fin 4) = X := rfl
have hY : consName v (consName u (consName (unionB X) (consName X ?)))
  (2 : Fin 4) = unionB X := rfl
have hu : consName v (consName u (consName (unionB X) (consName X ?)))
  (1 : Fin 4) = u := rfl
have hv : consName v (consName u (consName (unionB X) (consName X ?)))
  (0 : Fin 4) = v := rfl
simp [SetFormula.bval_mem, hX, hY, hu, hv]
exact memB_unionB_of_mem X u v

theorem axiom_power_valid (? : Fin 0 -> AName.{u} A) :
  bval powerAxiom ? = top := by
  unfold powerAxiom
  rw [all_valid_iff]
  intro X
  refine bval_ex_eq_top_of (powerB X) ?_
  rw [all_valid_iff]
  intro u
  rw [SetFormula.bval_implies, himp_eq_top_iff]
  have hY : consName u (consName (powerB X) (consName X ?)) (1 : Fin 3) =
    powerB X := rfl
  have hu : consName u (consName (powerB X) (consName X ?)) (0 : Fin 3) = u :=
    rfl
  simp only [SetFormula.bval_all, SetFormula.bval_implies, SetFormula.bval_mem,
    hY, hu]
  have hsub :
    (? z : AName A,
      memB (consName z (consName u (consName (powerB X) (consName X ?)))
        (0 : Fin 4))
        (consName z (consName u (consName (powerB X) (consName X ?)))
          (1 : Fin 4)) ?
      memB (consName z (consName u (consName (powerB X) (consName X ?)))
        (0 : Fin 4))
        (consName z (consName u (consName (powerB X) (consName X ?)))
          (3 : Fin 4))) = subsetB u X := by
    refine Eq.trans (iInf_congr fun z => ?_) (subsetB_eq_iInf u X).symm
  have hz0 : consName z (consName u (consName (powerB X) (consName X ?)))
    (0 : Fin 4) = z := rfl
  have hz1 : consName z (consName u (consName (powerB X) (consName X ?)))
    (1 : Fin 4) = u := rfl
  have hz3 : consName z (consName u (consName (powerB X) (consName X ?)))
    (3 : Fin 4) = X := rfl
  simp [hz0, hz1, hz3]
  rw [hsub, memB_powerB]

theorem bval_sepRename {n} (phi : SetFormula (n + 1)) (z Y X : AName.{u} A)
  (? : Fin n -> AName.{u} A) :
  bval (rename sepRename phi) (consName z (consName Y (consName X ?))) =
    bval phi (consName z ?) := by
  rw [SetFormula.bval_rename]
  congr 1
  funext i
  refine Fin.cases ?_ ?_ i
  * rfl
  * intro i
    exact consName_addNat3 z Y X ? i

theorem axiom_separation_valid {n} (phi : SetFormula (n + 1))
  (? : Fin n -> AName.{u} A) :
  bval (separationAxiom phi) ? = top := by
  unfold separationAxiom

```

```

rw [all_valid_iff]
intro X
refine bval_ex_eq_top_of (sepB X (fun z => bval phi (consName z ?))) ?_
rw [all_valid_iff]
intro z
rw [SetFormula.bval_iff]
have hY : consName z (consName (sepB X (fun w => bval phi (consName w ?)))
  (consName X ?)) (1 : Fin (n + 3)) =
  sepB X (fun w => bval phi (consName w ?)) := rfl
have hX : consName z (consName (sepB X (fun w => bval phi (consName w ?)))
  (consName X ?)) (2 : Fin (n + 3)) = X := rfl
have hz : consName z (consName (sepB X (fun w => bval phi (consName w ?)))
  (consName X ?)) (0 : Fin (n + 3)) = z := rfl
simp only [SetFormula.bval_and, SetFormula.bval_mem, hY, hX, hz]
rw [bval_sepRename, memB_sepB (A := A) z X (fun w => bval phi (consName w ?))
  (fun x y => SetFormula.bval_subst phi x y ?)]
simp [himp_self]

theorem memB_check_empty (z : AName.{u} A) :
  memB z (check (A := A) ({ } : PSet.{u})) = False := by
  have hempty : ({ } : PSet.{u}) = PSet.mk PEmpty PEmpty.elim := PSet.empty_def
  rw [hempty, check_mk, memB_mk]
  exact iSup_of_empty _

theorem iSup_eqB_inf_memB (s X : AName.{u} A) :
  (bigcup t, eqB t s sqcap memB t X) = memB s X :=
  le_antisymm
  (iSup_le fun t => by
    rw [inf_comm]
    exact memB_eqB_left t X s)
  (le_iSup_of_le s (by rw [eqB_self]; exact le_inf le_top le_rfl))

theorem eqB_eq_insert_succ (s y : AName.{u} A) :
  (? z : AName.{u} A, (memB z s ? memB z y sqsup eqB z y) sqcap
    (memB z y sqsup eqB z y ? memB z s)) = eqB s (succB y) := by
  have h : forall z, memB z (succB y) = memB z y sqsup eqB z y := fun z => by
    rw [succB, memB_insertB, sup_comm]
  refine Eq.trans (iInf_congr fun z => by rw [← h z]) (eqB_eq_iInf s (succB y)).symm

theorem axiom_infinity_valid (? : Fin 0 -> AName.{u} A) :
  bval infinityAxiom ? = top := by
  unfold infinityAxiom
  refine bval_ex_eq_top_of (check (A := A) PSet.omega) ?_
  rw [SetFormula.bval_and]
  refine inf_eq_top_iff.mpr <?empty, ?succ>
  * refine bval_ex_eq_top_of (check (A := A) ({ } : PSet.{u})) ?_
    rw [SetFormula.bval_and]
    refine inf_eq_top_iff.mpr <?emp, ?mem>
  * rw [SetFormula.bval_all]
    refine iInf_eq_top.mpr fun z => ?_
    simp [SetFormula.bval_not, SetFormula.bval_mem, consName,
      memB_check_empty, compl_bot]
  * simp [SetFormula.bval_mem, consName]
    exact memB_check_ofNat_of_inductive (A := A) (check PSet.omega)
      check_omega_inductive 0
  * rw [all_valid_iff]
    intro y
    rw [SetFormula.bval_implies, himp_eq_top_iff]
    have hy : consName y (consName (check (A := A) PSet.omega) ?) (0 : Fin 2) =
      y := rfl
    have h? : consName y (consName (check (A := A) PSet.omega) ?) (1 : Fin 2) =
      check (A := A) PSet.omega := rfl
    simp only [SetFormula.bval_mem, hy, h?]

```

```

have hcl : memB y (check (A := A) PSet.omega) <=
  memB (succB y) (check PSet.omega) :=
  himp_eq_top_iff.mp (iInf_eq_top.mp
    (inf_eq_top_iff.mp (check_omega_inductive (A := A))).2 y)
refine hcl.trans ?_
have hform :
  SetFormula.bval
    (.ex (.and
      (.all (iff (.mem 0 1) (.or (.mem 0 2) (.eq 0 2))))
      (.mem 0 2)))
    (consName y (consName (check (A := A) PSet.omega) ?)) =
    bigcup s : AName.{u} A,
    eqB s (succB y) sqcap memB s (check (A := A) PSet.omega) := by
  refine iSup_congr fun s => ?_
have hs : consName s (consName y (consName (check (A := A) PSet.omega) ?))
  (0 : Fin 3) = s := rfl
have h?' : consName s (consName y (consName (check (A := A) PSet.omega) ?))
  (2 : Fin 3) = check (A := A) PSet.omega := rfl
simp only [SetFormula.bval_and, SetFormula.bval_all, SetFormula.bval_iff,
  SetFormula.bval_or, SetFormula.bval_mem, SetFormula.bval_eq, hs, h?']
refine congrArg (fun a => a sqcap memB s (check (A := A) PSet.omega)) ?_
refine Eq.trans (iInf_congr fun z => ?_) (eqB_eq_insert_succ s y)
have hz1 : consName z (consName s (consName y
  (consName (check (A := A) PSet.omega) ?))) (1 : Fin 4) = s := rfl
have hz2 : consName z (consName s (consName y
  (consName (check (A := A) PSet.omega) ?))) (2 : Fin 4) = y := rfl
simp [hz1, hz2]
rw [hform, iSup_eqB_inf_memB]

theorem regularity_core_compl (X y : AName.{u} A) :
  (? z : AName.{u} A, memB z y ? (memB z X)?) =
  ( bigcup z : AName.{u} A, memB z y sqcap memB z X)? := by
have h : forall z : AName.{u} A,
  memB z y ? (memB z X)? = (memB z y sqcap memB z X)? := by
  intro z
  rw [himp_eq, <- compl_inf, inf_comm]
simp_rw [h]
rw [ <- compl_iSup]

theorem memB_decomp_regularity (X y : AName.{u} A) :
  memB y X =
  (memB y X sqcap ? z : AName.{u} A, memB z y ? (memB z X)?) sqsup
  (memB y X sqcap bigcup z : AName.{u} A, memB z y sqcap memB z X) := by
  rw [regularity_core_compl, <- inf_sup_left, sup_comm, sup_compl_eq_top,
    inf_top_eq]

/-- Jech 14.26: a nonempty name has a Boolean-minimal element, by rank. -/
theorem regularity_semantic (X : AName.{u} A) :
  ( bigcup y : AName.{u} A, memB y X) <=
  bigcup y : AName.{u} A,
  memB y X sqcap ? z : AName.{u} A, memB z y ? (memB z X)? := by
have hwf : WellFounded fun x y : AName.{u} A => rank x < rank y :=
  InvImage.wf rank wellFounded_lt
refine iSup_le fun y => ?_
refine hwf.induction (C := fun y : AName.{u} A =>
  memB y X <= bigcup w : AName.{u} A,
  memB w X sqcap ? z : AName.{u} A, memB z w ? (memB z X)?)
y fun y ih => ?_
have hdecomp := memB_decomp_regularity (A := A) X y
have hcore :
  memB y X sqcap bigcup z : AName.{u} A, memB z y sqcap memB z X <=
  bigcup w : AName.{u} A,
  memB w X sqcap ? z : AName.{u} A, memB z w ? (memB z X)? := by

```

```

refine inf_le_of_right_le (iSup_le fun z => ?_)
rw [memB_eq (x := z) (y := y), iSup_inf_eq]
refine iSup_le fun i => ?_
have hchild :
  eqB z (y.child i) sqcap y.val i sqcap memB z X <= memB (y.child i) X := by
  have : eqB z (y.child i) sqcap memB z X <= memB (y.child i) X := by

```

Lean 4 source (lines 2801–3200)

```

  rw [inf_comm]; exact memB_eqB_left z X (y.child i)
  exact this.trans' (le_inf (inf_le_of_left_le inf_le_left) inf_le_right)
  exact hchild.trans (ih (y.child i) (rank_child_lt y i))
have hgood :
  memB y X sqcap ? z : AName.{u} A, memB z y ? (memB z X)? <=
  bigcup w : AName.{u} A,
  memB w X sqcap ? z : AName.{u} A, memB z w ? (memB z X)? :=
  le_iSup_of_le y le_rfl
exact hdecomp.le.trans (sup_le hgood hcore)

theorem axiom_regularity_valid (? : Fin 0 -> AName.{u} A) :
  bval regularityAxiom ? = top := by
  unfold regularityAxiom
  rw [all_valid_iff]
  intro X
  rw [SetFormula.bval_implies, himp_eq_top_iff]
  have hlhs :
    SetFormula.bval (.ex (.mem 0 1)) (consName X ?) =
    bigcup y : AName.{u} A, memB y X := by
  refine iSup_congr fun y => ?_
  have hy : consName y (consName X ?) (0 : Fin 2) = y := rfl
  have hX : consName y (consName X ?) (1 : Fin 2) = X := rfl
  simp [SetFormula.bval_mem, hy, hX]
  have hrhs :
    SetFormula.bval
    (.ex (.and (.mem 0 1)
      (.all (implies (.mem 0 1) (.not (.mem 0 2))))))
    (consName X ?) =
    bigcup y : AName.{u} A,
    memB y X sqcap ? z : AName.{u} A, memB z y ? (memB z X)? := by
  refine iSup_congr fun y => ?_
  have hy : consName y (consName X ?) (0 : Fin 2) = y := rfl
  have hX : consName y (consName X ?) (1 : Fin 2) = X := rfl
  simp only [SetFormula.bval_and, SetFormula.bval_mem, SetFormula.bval_all,
    SetFormula.bval_implies, SetFormula.bval_not, hy, hX]
  refine congrArg (fun a => memB y X sqcap a) (iInf_congr fun z => ?_)
  have hz0 : consName z (consName y (consName X ?)) (0 : Fin 3) = z := rfl
  have hz1 : consName z (consName y (consName X ?)) (1 : Fin 3) = y := rfl
  have hz2 : consName z (consName y (consName X ?)) (2 : Fin 3) = X := rfl
  simp [hz0, hz1, hz2]
  rw [hlhs, hrhs]
  exact regularity_semantic X

omit [CompleteBooleanAlgebra A] in
theorem consName_addNat4 {n} (v u Y X : AName.{u} A) (? : Fin n -> AName.{u} A)
  (i : Fin n) :
  consName v (consName u (consName Y (consName X ?))) (i.addNat 4) = ? i := by
  rw [show i.addNat 4 = (i.addNat 3).succ from addNat_succ' (m := 3) i,
    consName_succ]
  exact consName_addNat3 u Y X ? i

theorem bval_colRename {n} (phi : SetFormula (n + 2))
  (v u Y X : AName.{u} A) (? : Fin n -> AName.{u} A) :
  SetFormula.bval (rename colRename phi)
  (consName v (consName u (consName Y (consName X ?)))) =

```

```

    SetFormula.bval phi (consName v (consName u ?)) := by
rw [SetFormula.bval_rename]
congr 1
funext i
refine Fin.cases ?_ (fun i => Fin.cases ?_ (fun i => ?_) i) i
* rfl
* rfl
* exact consName_addNat4 v u Y X ? i

theorem axiom_collection_valid {n} (phi : SetFormula (n + 2))
  (? : Fin n -> AName.{u} A) :
  bval (collectionAxiom phi) ? = top := by
unfold collectionAxiom
rw [all_valid_iff]
intro X
let ? : AName.{u} A -> AName.{u} A -> A :=
  fun u v => SetFormula.bval phi (consName v (consName u ?))
have hcongr : forall u v w, eqB v w sqcap ? u v <= ? u w :=
  fun u v w => SetFormula.bval_subst phi v w (consName u ?)
have hcongr_u (u u' v : AName.{u} A) : eqB u u' sqcap ? u v <= ? u' v := by
  have h := SetFormula.bval_congr phi (consName v (consName u ?))
    (consName v (consName u' ?))
  have hcons :
    (? i, eqB (consName v (consName u ?) i)
      (consName v (consName u' ?) i)) = eqB u u' := by
    rw [iInf_fin_succ (fun i => eqB (consName v (consName u ?) i)
      (consName v (consName u' ?) i))]
    rw [iInf_fin_succ (fun i : Fin (n + 1) =>
      eqB (consName v (consName u ?) i.succ)
      (consName v (consName u' ?) i.succ))]
    simp [consName, eqB_self]
  rwa [hcons] at h
refine bval_ex_eq_top_of (collectB X ? hcongr) ?_
rw [all_valid_iff]
intro u
rw [SetFormula.bval_implies, SetFormula.bval_implies, himp_eq_top_iff,
  le_himp_iff]
have hX : consName u (consName (collectB X ? hcongr) (consName X ?))
  (2 : Fin (n + 3)) = X := rfl
have hY : consName u (consName (collectB X ? hcongr) (consName X ?))
  (1 : Fin (n + 3)) = collectB X ? hcongr := rfl
have hu : consName u (consName (collectB X ? hcongr) (consName X ?))
  (0 : Fin (n + 3)) = u := rfl
have hex :
  SetFormula.bval (.ex (rename colRename phi))
    (consName u (consName (collectB X ? hcongr) (consName X ?))) =
    bigcup v : AName.{u} A, ? u v := by
  refine iSup_congr fun v => ?_
  rw [bval_colRename]
have hexY :
  SetFormula.bval
    (.ex (.and (.mem 0 2) (rename colRename phi)))
    (consName u (consName (collectB X ? hcongr) (consName X ?))) =
    bigcup v : AName.{u} A, memB v (collectB X ? hcongr) sqcap ? u v := by
  refine iSup_congr fun v => ?_
  have hv : consName v
    (consName u (consName (collectB X ? hcongr) (consName X ?)))
    (0 : Fin (n + 4)) = v := rfl
  have hY' : consName v
    (consName u (consName (collectB X ? hcongr) (consName X ?)))
    (2 : Fin (n + 4)) = collectB X ? hcongr := rfl
  simp only [SetFormula.bval_and, SetFormula.bval_mem, hv, hY']
  rw [bval_colRename]

```

```

simp only [SetFormula.bval_mem, hX, hu]
rw [hex, hexY]
rw [memB_eq (x := u) (y := X), iSup_inf_eq]
refine iSup_le fun i => ?_
have hto :
  eqB u (X.child i) sqcap X.val i sqcap bigcup v : AName.{u} A, ? u v <=
    eqB u (X.child i) sqcap
      ? (X.child i) ((collectB X ? hcongr).child i) := by
refine le_inf (inf_le_of_left_le inf_le_left) ?_
have hswap :
  eqB u (X.child i) sqcap bigcup v : AName.{u} A, ? u v <=
    bigcup v : AName.{u} A, ? (X.child i) v := by
rw [inf_iSup_eq]
refine iSup_le fun v => ?_
exact (hcongr_u u (X.child i) v).trans
  (le_iSup (fun w => ? (X.child i) w) v)
exact (collectB_spec X ? hcongr i).ge.trans'
  (hswap.trans' (le_inf (inf_le_of_left_le inf_le_left) inf_le_right))
refine hto.trans ?_
have hmemY : ( top : A) <=
  memB ((collectB X ? hcongr).child i) (collectB X ? hcongr) :=
  val_le_memB (collectB X ? hcongr) i
have hback : eqB u (X.child i) sqcap
  ? (X.child i) ((collectB X ? hcongr).child i) <=
  ? u ((collectB X ? hcongr).child i) := by
  simpa [eqB_comm (x := u) (y := X.child i)] using
    hcongr_u (X.child i) u ((collectB X ? hcongr).child i)
refine (le_inf (hmemY.trans' le_top) hback).trans
  (le_iSup (fun v : AName.{u} A =>
    memB v (collectB X ? hcongr) sqcap ? u v)
    ((collectB X ? hcongr).child i))

theorem hilbertK_sound {n} (phi psi : SetFormula n) (? : Fin n -> AName.{u} A) :
  bval (implies phi (implies psi phi)) ? = top := by
  simp only [SetFormula.bval_implies]
  rw [himp_eq_top_iff, le_himp_iff]
  exact inf_le_left

theorem hilbertS_sound {n} (phi psi chi : SetFormula n) (? : Fin n -> AName.{u} A) :
  bval (implies (implies phi (implies psi chi))
    (implies (implies phi psi) (implies phi chi))) ? = top := by
  simp only [SetFormula.bval_implies]
  rw [himp_eq_top_iff, le_himp_iff, le_himp_iff]
  set a := SetFormula.bval phi ?
  set b := SetFormula.bval psi ?
  set c := SetFormula.bval chi ?
  change (a ? (b ? c)) sqcap (a ? b) sqcap a <= c
  have hre : (a ? (b ? c)) sqcap (a ? b) sqcap a = a sqcap (a ? (b ? c)) sqcap (a ? b)
    := by
    ac_rfl
  rw [hre]
  have h1 : a sqcap (a ? (b ? c)) <= b ? c := by
    rw [inf_comm]; exact himp_inf_le (a := a) (b := b ? c)
  have h2 : a sqcap (a ? b) <= b := by
    rw [inf_comm]; exact himp_inf_le (a := a) (b := b)
  have h3 : a sqcap (a ? (b ? c)) sqcap (a ? b) <= (b ? c) sqcap b :=
    le_inf (h1.trans' inf_le_left)
      (h2.trans' (le_inf (inf_le_of_left_le inf_le_left) inf_le_right))
  exact h3.trans (himp_inf_le (a := b) (b := c))

theorem hilbertDNE_sound {n} (phi psi : SetFormula n) (? : Fin n -> AName.{u} A) :
  bval (implies (implies phi.not psi.not) (implies psi phi)) ? = top := by
  simp only [SetFormula.bval_implies, SetFormula.bval_not]

```

```

rw [himp_eq_top_iff]
simp only [himp_eq, compl_compl]
exact (sup_comm (a := (SetFormula.bval psi ?)) (b := SetFormula.bval phi ?)).le

theorem allImp_sound {n} (phi psi : SetFormula (n + 1)) (? : Fin n → AName.{u} A) :
  bval (implies (.all (implies phi psi)) (implies (.all phi) (.all psi))) ? = top := by
  simp only [SetFormula.bval_implies, SetFormula.bval_all]
  rw [himp_eq_top_iff]
  exact iInf_himp_le_himp_iInf
    (fun x => SetFormula.bval phi (consName x ?))
    (fun x => SetFormula.bval psi (consName x ?))

theorem allVac_sound {n} (phi : SetFormula n) (psi : SetFormula (n + 1))
  (? : Fin n → AName.{u} A) :
  bval (implies (.all (implies phi.lift psi)) (implies phi (.all psi))) ? = top := by
  simp only [SetFormula.bval_implies, SetFormula.bval_all, SetFormula.bval_lift]
  rw [himp_eq_top_iff]
  exact (SetFormula.himp_iInf_eq (SetFormula.bval phi ?)
    (fun x => SetFormula.bval psi (consName x ?))).ge

theorem allInst_sound {n} (phi : SetFormula (n + 1)) (t : Fin n)
  (? : Fin n → AName.{u} A) :
  bval (implies (.all phi) (inst phi t)) ? = top := by
  rw [SetFormula.bval_implies, SetFormula.bval_all, SetFormula.bval_inst,
    himp_eq_top_iff]
  exact iInf_le _ (? t)

theorem eqRef1_sound (? : Fin 0 → AName.{u} A) :
  bval (.all (.eq 0 0)) ? = top := by
  rw [SetFormula.bval_all]
  refine iInf_eq_top.mpr fun x => ?_
  simp [SetFormula.bval_eq, consName, eqB_self]

theorem bval_eqLeibnizRenameX {n} (phi : SetFormula (n + 1))
  (y x : AName.{u} A) (? : Fin n → AName.{u} A) :
  SetFormula.bval (rename eqLeibnizRenameX phi) (consName y (consName x ?)) =
    SetFormula.bval phi (consName x ?) := by
  rw [SetFormula.bval_rename]
  congr 1
  funext i
  refine Fin.cases ?_ (fun i => ?_) i
  * rfl
  * simp [eqLeibnizRenameX, consName]

theorem bval_eqLeibnizRenameY {n} (phi : SetFormula (n + 1))
  (y x : AName.{u} A) (? : Fin n → AName.{u} A) :
  SetFormula.bval (rename eqLeibnizRenameY phi) (consName y (consName x ?)) =
    SetFormula.bval phi (consName y ?) := by
  rw [SetFormula.bval_rename]
  congr 1
  funext i
  refine Fin.cases ?_ (fun i => ?_) i
  * rfl
  * simp [eqLeibnizRenameY, consName]

theorem eqLeibniz_sound {n} (phi : SetFormula (n + 1))
  (? : Fin n → AName.{u} A) :
  bval (eqLeibnizAxiom phi) ? = top := by
  unfold eqLeibnizAxiom
  rw [all_valid_iff]
  intro x
  rw [all_valid_iff]
  intro y

```

```

rw [SetFormula.bval_implies, SetFormula.bval_implies, himp_eq_top_iff,
    le_himp_iff]
have hx : consName y (consName x ?) (1 : Fin (n + 2)) = x := rfl
have hy : consName y (consName x ?) (0 : Fin (n + 2)) = y := rfl
simp only [SetFormula.bval_eq, hx, hy]
rw [bval_eqLeibnizRenameX, bval_eqLeibnizRenameY]
exact SetFormula.bval_subst phi x y ?

theorem memB_opairB (z x y : AName.{u} A) :
  memB z (opairB x y) = eqB z (singletonB x) sqsup eqB z (pairB x y) := by
  rw [opairB, memB_pairB]

theorem bval_isSingletonF {n} (z a : Fin n) (? : Fin n -> AName.{u} A) :
  bval (isSingletonF z a) ? = eqB (? z) (singletonB (? a)) := by
  unfold isSingletonF
  rw [SetFormula.bval_all]
  refine Eq.trans (iInf_congr fun w => ?_)
    (eqB_eq_iInf (? z) (singletonB (? a))).symm
  have hz : consName w ? z.succ = ? z := by simp [consName]
  have ha : consName w ? a.succ = ? a := by simp [consName]
  simp [SetFormula.bval_iff, SetFormula.bval_mem, SetFormula.bval_eq, hz, ha,
    memB_singletonB]

theorem bval_isUPairF {n} (z a b : Fin n) (? : Fin n -> AName.{u} A) :
  bval (isUPairF z a b) ? = eqB (? z) (pairB (? a) (? b)) := by
  unfold isUPairF
  rw [SetFormula.bval_all]
  refine Eq.trans (iInf_congr fun w => ?_)
    (eqB_eq_iInf (? z) (pairB (? a) (? b))).symm
  have hz : consName w ? z.succ = ? z := by simp [consName]
  have ha : consName w ? a.succ = ? a := by simp [consName]
  have hb : consName w ? b.succ = ? b := by simp [consName]
  simp [SetFormula.bval_iff, SetFormula.bval_or, SetFormula.bval_mem,
    SetFormula.bval_eq, hz, ha, hb, memB_pairB]

theorem bval_isOpairF {n} (p a b : Fin n) (? : Fin n -> AName.{u} A) :
  bval (isOpairF p a b) ? = eqB (? p) (opairB (? a) (? b)) := by
  unfold isOpairF
  rw [SetFormula.bval_all]
  refine Eq.trans (iInf_congr fun w => ?_)
    (eqB_eq_iInf (? p) (opairB (? a) (? b))).symm
  have hp : consName w ? p.succ = ? p := by simp [consName]
  have ha : consName w ? a.succ = ? a := by simp [consName]
  have hb : consName w ? b.succ = ? b := by simp [consName]
  have hw0 : consName w ? 0 = w := rfl
  simp only [SetFormula.bval_iff, SetFormula.bval_or, SetFormula.bval_mem,
    bval_isSingletonF, bval_isUPairF, hw0, hp, ha, hb]
  rw [memB_opairB]

theorem bval_opairMemF {n} (a b r : Fin n) (? : Fin n -> AName.{u} A) :
  bval (opairMemF a b r) ? = memB (opairB (? a) (? b)) (? r) := by
  unfold opairMemF
  rw [SetFormula.bval_ex]
  refine Eq.trans (iSup_congr fun p => ?_)
    (iSup_eqB_inf_memB (opairB (? a) (? b)) (? r))
  simp [SetFormula.bval_and, SetFormula.bval_mem, bval_isOpairF, consName]

open Classical

/-- Boolean value of a proposition, via classical decidability. -/
noncomputable def worITE (p : Prop) (t e : A) : A :=
  if p then t else e

```



```

noncomputable def worLe {a : Type u} (i j : a) : A :=
  worITE (WellOrderingRel i j \ / i = j) top False

noncomputable def worDisj {a : Type u} (a : a -> A) (i : a) : A :=
  a i sqcap ? j : a, worITE (WellOrderingRel j i) (a j)? top

noncomputable def worPredSup {a : Type u} (a : a -> A) (i : a) : A :=
  bigcup j : a, worITE (WellOrderingRel j i) (a j) False

noncomputable def canonVal (X : AName.{u} A) (i : X.idx) : A :=
  X.val i sqcap ? j : X.idx,
  worITE (WellOrderingRel j i)
  (eqB (X.child i) (X.child j) sqcap X.val j)? top

noncomputable def leastIdx (X u : AName.{u} A) (i : X.idx) : A :=
  eqB u (X.child i) sqcap canonVal X i

/-- Well-order name of `X` by least `WellOrderingRel`-index of a child. -/
noncomputable def wellOrderB (X : AName.{u} A) : AName.{u} A :=
  mk (X.idx x X.idx)
  (fun p => opairB (X.child p.1) (X.child p.2))
  (fun p => worLe p.1 p.2 sqcap canonVal X p.1 sqcap canonVal X p.2)

omit [CompleteBooleanAlgebra A] in
theorem worITE_pos {p : Prop} {t e : A} (hp : p) : worITE p t e = t :=
  if_pos hp

omit [CompleteBooleanAlgebra A] in
theorem worITE_neg {p : Prop} {t e : A} (hp : not p) : worITE p t e = e :=
  if_neg hp

theorem worLe_refl {a : Type u} (i : a) : worLe (A := A) i i = top :=
  worITE_pos (Or.inr rfl)

theorem worLe_total {a : Type u} (i j : a) :
  worLe (A := A) i j sqsup worLe (A := A) j i = top := by
  unfold worLe worITE
  rcases trichotomous (r := WellOrderingRel) i j with h | h | h
  * simp [h]
  * simp [h]
  * simp [h]

theorem worLe_of_eq {a : Type u} {i j : a} (h : i = j) :
  worLe (A := A) i j = top := by
  subst h; exact worLe_refl i

theorem worLe_trans {a : Type u} (i j k : a) :
  worLe (A := A) i j sqcap worLe (A := A) j k <= worLe (A := A) i k := by
  unfold worLe worITE
  by_cases hij : WellOrderingRel i j \ / i = j
  * by_cases hjk : WellOrderingRel j k \ / j = k
    * have hik : WellOrderingRel i k \ / i = k := by
        rcases hij with hij | hij <;> rcases hjk with hjk | hjk
        * exact Or.inl (IsTrans.trans (r := WellOrderingRel) i j k hij hjk)
        * subst hjk; exact Or.inl hij
        * subst hij; exact Or.inl hjk
        * subst hij; subst hjk; exact Or.inr rfl
      simp [hij, hjk, hik]
    * simp [hij, hjk]
  * simp [hij]

theorem worLe_antisymm {a : Type u} (i j : a) :
  worLe (A := A) i j sqcap worLe (A := A) j i <= worITE (i = j) (top : A) False := by

```

```

unfold worLe
by_cases hij : i = j
* simp [worITE, hij]
* by_cases hlt : WellOrderingRel i j
  * have hn : not WellOrderingRel j i := asymm hlt
    have hne : not (WellOrderingRel j i \ / j = i) := by
      rintro (h | h)
      * exact hn h
      * exact hij h.symm
    simp [worITE, hij, hlt, hne]
  * have hne : not (WellOrderingRel i j \ / i = j) := by
      rintro (h | h) <| contradiction
    simp [worITE, hne]

theorem worPred_compl {a : Type u} (a : a -> A) (i : a) :
  (? j : a, worITE (WellOrderingRel j i) (a j)? top) = (worPredSup a i)? := by
  have h : forall j : a,
    worITE (WellOrderingRel j i) (a j)? top =
      (worITE (WellOrderingRel j i) (a j) False)? := by
    intro j
    by_cases hj : WellOrderingRel j i
    * rw [worITE_pos hj, worITE_pos hj]
    * rw [worITE_neg hj, worITE_neg hj, compl_bot]
  simp_rw [h]
  rw [ <- compl_iSup]
  rfl

```

```

theorem worDisj_decomp {a : Type u} (a : a -> A) (i : a) :
  a i = worDisj a i sqsup (a i sqcap worPredSup a i) := by
  unfold worDisj
  rw [worPred_compl, <- inf_sup_left, sup_comm, sup_compl_eq_top, inf_top_eq]

```

Lean 4 source (lines 3201–3600)

```

theorem worDisj_le_compl {a : Type u} (a : a -> A) {i j : a}
  (hij : WellOrderingRel j i) : worDisj a i <= (a j)? := by
  refine inf_le_right.trans ?_
  have := iInf_le (fun k : a => worITE (WellOrderingRel k i) (a k)? top) j
  rwa [worITE_pos hij] at this

theorem worDisj_pairwise {a : Type u} (a : a -> A) :
  Pairwise fun i j : a => worDisj a i sqcap worDisj a j = False := by
  intro i j hij
  apply bot_unique
  rcases trichotomous (r := WellOrderingRel) i j with h | h | h
  * have hi : worDisj a i <= a i := inf_le_left
    have hj : worDisj a j <= (a i)? := worDisj_le_compl a h
    exact (inf_le_inf hi hj).trans inf_compl_eq_bot.le
  * exact (hij h).elim
  * have hj : worDisj a j <= a j := inf_le_left
    have hi : worDisj a i <= (a j)? := worDisj_le_compl a h
    exact (inf_le_inf hi hj).trans <| by
      rw [inf_comm]
      exact inf_compl_eq_bot.le

theorem worDisj_iSup {a : Type u} (a : a -> A) :
  (bigcup i, worDisj a i) = bigcup i, a i := by
  refine le_antisymm (iSup_mono fun i => inf_le_left) (iSup_le fun i => ?_)
  refine WellOrderingRel.isWellOrder.wf.induction
  (C := fun i : a => a i <= bigcup k, worDisj a k) i fun i ih => ?_
  have hdecomp := worDisj_decomp (A := A) a i
  have hpred : worPredSup a i <= bigcup k, worDisj a k := by
    unfold worPredSup

```

```

    refine iSup_le fun j => ?_
    by_cases hj : WellOrderingRel j i
    * rw [worITE_pos hj]
      exact ih j hj
    * rw [worITE_neg hj]
      exact bot_le
  exact hdecomp.le.trans (sup_le (le_iSup (worDisj a) i)
    (hpred.trans' inf_le_right))

theorem inf_compl_congr {a d e : A} (h : a sqcap d = a sqcap e) : a sqcap d? = a sqcap
e? := by
  have hd : a sqcap d? = a sqcap (a sqcap d)? := by
    rw [compl_inf, inf_sup_left, inf_compl_eq_bot, bot_sup_eq]
  have he : a sqcap e? = a sqcap (a sqcap e)? := by
    rw [compl_inf, inf_sup_left, inf_compl_eq_bot, bot_sup_eq]
  rw [hd, he, h]

theorem eqB_inf_child (X u : AName.{u} A) (i j : X.idx) :
  eqB u (X.child i) sqcap eqB (X.child i) (X.child j) =
  eqB u (X.child i) sqcap eqB u (X.child j) :=
  le_antisymm
    (le_inf inf_le_left (eqB_trans u (X.child i) (X.child j)))
    (le_inf inf_le_left ((eqB_trans (X.child i) u (X.child j)).trans'
      (le_inf (by rw [eqB_comm]; exact inf_le_left) inf_le_right)))

theorem leastIdx_eq_worDisj (X u : AName.{u} A) (i : X.idx) :
  leastIdx X u i =
    worDisj (fun j : X.idx => eqB u (X.child j) sqcap X.val j) i := by
  unfold leastIdx canonVal worDisj
  let eu : A := eqB u (X.child i)
  have hpt (j : X.idx) :
    eu sqcap worITE (WellOrderingRel j i)
    (eqB (X.child i) (X.child j) sqcap X.val j)? top =
    eu sqcap worITE (WellOrderingRel j i)
    (eqB u (X.child j) sqcap X.val j)? top := by
  by_cases hj : WellOrderingRel j i
  * simp only [worITE_pos hj]
    refine inf_compl_congr ?_
    have heq := eqB_inf_child X u i j
    calc eu sqcap (eqB (X.child i) (X.child j) sqcap X.val j)
      = (eu sqcap eqB (X.child i) (X.child j)) sqcap X.val j := by ac_rfl
    _ = (eu sqcap eqB u (X.child j)) sqcap X.val j := by
      change (eqB u (X.child i) sqcap eqB (X.child i) (X.child j)) sqcap X.val j =
        (eqB u (X.child i) sqcap eqB u (X.child j)) sqcap X.val j
    rw [heq]
    _ = eu sqcap (eqB u (X.child j) sqcap X.val j) := by ac_rfl
  * simp [worITE_neg hj]
  have hinf :
    eu sqcap ? j : X.idx,
    worITE (WellOrderingRel j i)
    (eqB (X.child i) (X.child j) sqcap X.val j)? top =
    eu sqcap ? j : X.idx,
    worITE (WellOrderingRel j i)
    (eqB u (X.child j) sqcap X.val j)? top := by
  refine le_antisymm ?_ ?_
  * refine le_inf inf_le_left (le_iInf fun j => ?_)
    have hf := iInf_le (fun k : X.idx =>
      worITE (WellOrderingRel k i)
      (eqB (X.child i) (X.child k) sqcap X.val k)? top ) j
    have := inf_le_inf_left eu hf
    rw [hpt j] at this
    exact this.trans inf_le_right
  * refine le_inf inf_le_left (le_iInf fun j => ?_)

```

```

    have hg := iInf_le (fun k : X.idx =>
      worITE (WellOrderingRel k i)
        (eqB u (X.child k) sqcap X.val k)? top ) j
    have := inf_le_inf_left eu hg
    rw [ <- hpt j] at this
    exact this.trans inf_le_right
change eu sqcap (X.val i sqcap ? j : X.idx,
  worITE (WellOrderingRel j i)
    (eqB (X.child i) (X.child j) sqcap X.val j)? top ) =
(eu sqcap X.val i) sqcap ? j : X.idx,
  worITE (WellOrderingRel j i)
    (eqB u (X.child j) sqcap X.val j)? top
calc eu sqcap (X.val i sqcap ? j : X.idx,
  worITE (WellOrderingRel j i)
    (eqB (X.child i) (X.child j) sqcap X.val j)? top )
= X.val i sqcap (eu sqcap ? j : X.idx,
  worITE (WellOrderingRel j i)
    (eqB (X.child i) (X.child j) sqcap X.val j)? top ) := by ac_rfl
_ = X.val i sqcap (eu sqcap ? j : X.idx,
  worITE (WellOrderingRel j i)
    (eqB u (X.child j) sqcap X.val j)? top ) := by rw [hinf]
_ = (eu sqcap X.val i) sqcap ? j : X.idx,
  worITE (WellOrderingRel j i)
    (eqB u (X.child j) sqcap X.val j)? top := by ac_rfl

theorem leastIdx_iSup (X u : AName.{u} A) :
  (bigcup i : X.idx, leastIdx X u i) = memB u X := by
  simp_rw [leastIdx_eq_worDisj]
  rw [worDisj_iSup, memB_eq]

theorem memB_opairB_wellOrderB (u v X : AName.{u} A) :
  memB (opairB u v) (wellOrderB X) =
    bigcup i : X.idx, bigcup j : X.idx,
      leastIdx X u i sqcap leastIdx X v j sqcap worLe i j := by
  unfold wellOrderB
  rw [memB_mk, iSup_prod]
  refine iSup_congr fun i => iSup_congr fun j => ?_
  rw [eqB_opairB]
  unfold leastIdx
  ac_rfl

theorem leastIdx_unique (X u : AName.{u} A) (i j : X.idx) :
  leastIdx X u i sqcap leastIdx X u j <= worITE (i = j) ( top : A) False := by
  by_cases hij : i = j
  * simp [worITE, hij]
  * simp only [worITE, hij, reduceIte]
  rcases trichotomous (r := WellOrderingRel) i j with h | h | h
  * have hj := worDisj_le_compl
    (fun k : X.idx => eqB u (X.child k) sqcap X.val k) h
    rw [ <- leastIdx_eq_worDisj] at hj
    have hi : leastIdx X u i <= eqB u (X.child i) sqcap X.val i := by
      rw [leastIdx_eq_worDisj]; exact inf_le_left
    exact (inf_le_inf hi hj).trans inf_compl_eq_bot.le
  * exact (hij h).elim
  * have hi := worDisj_le_compl
    (fun k : X.idx => eqB u (X.child k) sqcap X.val k) h
    rw [ <- leastIdx_eq_worDisj] at hi
    have hj : leastIdx X u j <= eqB u (X.child j) sqcap X.val j := by
      rw [leastIdx_eq_worDisj]; exact inf_le_left
    exact (inf_le_inf hi hj).trans <| by
      rw [inf_comm]; exact inf_compl_eq_bot.le

theorem wellOrderB_relOn (X u v : AName.{u} A) :

```

```

    memB (opairB u v) (wellOrderB X) <= memB u X sqcap memB v X := by
  rw [memB_opairB_wellOrderB]
  refine iSup_le fun i => iSup_le fun j => ?_
  have hu : leastIdx X u i <= memB u X :=
    (le_iSup (leastIdx X u) i).trans (leastIdx_iSup X u).le
  have hv : leastIdx X v j <= memB v X :=
    (le_iSup (leastIdx X v) j).trans (leastIdx_iSup X v).le
  exact le_inf (hu.trans' (inf_le_of_left_le inf_le_left))
    (hv.trans' (inf_le_of_left_le inf_le_right))

theorem wellOrderB_refl (X u : AName.{u} A) :
  memB u X <= memB (opairB u u) (wellOrderB X) := by
  rw [memB_opairB_wellOrderB, <- leastIdx_iSup]
  refine iSup_le fun i => le_iSup_of_le i (le_iSup_of_le i ?_)
  rw [worLe_refl, inf_top_eq, inf_idem]

theorem memB_opairB_wellOrderB_pair (u v X : AName.{u} A) :
  memB (opairB u v) (wellOrderB X) =
    bigcup p : X.idx x X.idx,
    leastIdx X u p.1 sqcap leastIdx X v p.2 sqcap worLe p.1 p.2 := by
  rw [memB_opairB_wellOrderB]
  exact (iSup_prod (f := fun p : X.idx x X.idx =>
    leastIdx X u p.1 sqcap leastIdx X v p.2 sqcap worLe p.1 p.2)).symm

theorem inf_iSup_inf_iSup_pair {a : Type u} (f g : a -> A) :
  (bigcup i : a, f i) sqcap (bigcup j : a, g j) = bigcup p : a x a, f p.1 sqcap g
  p.2 := by
  refine le_antisymm ?_ ?_
  * have h := inf_iSup_eq (a := bigcup i : a, f i) (f := g)
    rw [h]
    refine iSup_le fun j => ?_
    have h' := inf_iSup_eq (a := g j) (f := f)
    rw [inf_comm, h']
    refine iSup_le fun i => ?_
    rw [inf_comm]
    exact le_iSup (fun p : a x a => f p.1 sqcap g p.2) (i, j)
  * refine iSup_le fun p => inf_le_inf (le_iSup f p.1) (le_iSup g p.2)

theorem inf_iSup_pair_le {a : Type u} (f g : a x a -> A) :
  (bigcup p : a x a, f p) sqcap (bigcup q : a x a, g q) <=
    bigcup p : a x a, bigcup q : a x a, f p sqcap g q := by
  have h := inf_iSup_eq (a := bigcup p : a x a, f p) (f := g)
  rw [h]
  refine iSup_le fun q => ?_
  have h' := inf_iSup_eq (a := g q) (f := f)
  rw [inf_comm, h']
  refine iSup_le fun p => ?_
  rw [inf_comm]
  exact le_iSup_of_le p (le_iSup_of_le q le_refl)

theorem leastIdx_le_eqB (X u : AName.{u} A) (i : X.idx) :
  leastIdx X u i <= eqB u (X.child i) := by
  rw [leastIdx_eq_worDisj]; exact inf_le_of_left_le inf_le_left

theorem leastIdx_le_val (X u : AName.{u} A) (i : X.idx) :
  leastIdx X u i <= X.val i := by
  rw [leastIdx_eq_worDisj]; exact inf_le_of_left_le inf_le_right

theorem leastIdx_child (X : AName.{u} A) (i : X.idx) :
  leastIdx X (X.child i) i = canonVal X i := by
  unfold leastIdx
  rw [eqB_self, top_inf_eq]

```

```

theorem leastIdx_eqB_same (X u v : AName.{u} A) (i : X.idx) :
  leastIdx X u i sqcap leastIdx X v i <= eqB u v := by
  refine (inf_le_inf (leastIdx_le_eqB X u i) (leastIdx_le_eqB X v i)).trans ?_
  rw [eqB_comm (x := v) (y := X.child i)]
  exact eqB_trans u (X.child i) v

theorem wellOrderB_antisym (X u v : AName.{u} A) :
  memB (opairB u v) (wellOrderB X) sqcap memB (opairB v u) (wellOrderB X) <=
  eqB u v := by
  rw [memB_opairB_wellOrderB_pair, memB_opairB_wellOrderB_pair]
  refine (inf_iSup_pair_le _ _).trans ?_
  refine iSup_le fun p => iSup_le fun q => ?_
  by_cases hil : p.1 = q.2
  * by_cases hjk : p.2 = q.1
  * by_cases hij : p.1 = p.2
    * refine (le_inf ?hu ?hv).trans (leastIdx_eqB_same X u v p.1)
    * exact inf_le_of_left_le (inf_le_of_left_le inf_le_left)
    * rw [← hij]
      exact inf_le_of_left_le (inf_le_of_left_le inf_le_right)
  * have hbot := worLe_antisymm (A := A) p.1 p.2
    simp only [worITE, hij, reduceIte] at hbot
    refine (hbot.trans' (le_inf ?_ ?_)).trans bot_le
    * exact inf_le_of_left_le inf_le_right
    * have hle : leastIdx X v q.1 sqcap leastIdx X u q.2 sqcap worLe q.1 q.2 <=
      worLe p.2 p.1 := by
      rw [hjk, hil]; exact inf_le_right
      exact hle.trans' inf_le_right
  * have hbot := leastIdx_unique X v p.2 q.1
    simp only [worITE, hjk, reduceIte] at hbot
    refine (hbot.trans' (le_inf ?_ ?_)).trans bot_le
    * exact inf_le_of_left_le (inf_le_of_left_le inf_le_right)
    * exact inf_le_of_right_le (inf_le_of_left_le inf_le_left)
  * have hbot := leastIdx_unique X u p.1 q.2
    simp only [worITE, hil, reduceIte] at hbot
    refine (hbot.trans' (le_inf ?_ ?_)).trans bot_le
    * exact inf_le_of_left_le (inf_le_of_left_le inf_le_left)
    * exact inf_le_of_right_le (inf_le_of_left_le inf_le_right)

theorem wellOrderB_total (X u v : AName.{u} A) :
  memB u X sqcap memB v X <=
  memB (opairB u v) (wellOrderB X) sqsup memB (opairB v u) (wellOrderB X) := by
  rw [← leastIdx_iSup (X := X) (u := u), ← leastIdx_iSup (X := X) (u := v)]
  rw [inf_iSup_inf_iSup_pair, memB_opairB_wellOrderB_pair,
  memB_opairB_wellOrderB_pair]
  refine iSup_le fun p => ?_
  have hsplit :
    leastIdx X u p.1 sqcap leastIdx X v p.2 =
    (leastIdx X u p.1 sqcap leastIdx X v p.2 sqcap worLe p.1 p.2) sqsup
    (leastIdx X u p.1 sqcap leastIdx X v p.2 sqcap worLe p.2 p.1) := by
    rw [← inf_sup_left, worLe_total, inf_top_eq]
  rw [hsplit]
  refine sup_le ?_ ?_
  * exact le_sup_of_le_left (le_iSup (fun q : X.idx x X.idx =>
    leastIdx X u q.1 sqcap leastIdx X v q.2 sqcap worLe q.1 q.2) p)
  * refine le_sup_of_le_right
    ((le_iSup (fun q : X.idx x X.idx =>
      leastIdx X v q.1 sqcap leastIdx X u q.2 sqcap worLe q.1 q.2) (p.2, p.1)).trans' ?_)
    exact le_inf
      (le_inf (inf_le_of_left_le inf_le_right) (inf_le_of_left_le inf_le_left))
      inf_le_right

theorem wellOrderB_trans (X u v w : AName.{u} A) :
  memB (opairB u v) (wellOrderB X) sqcap memB (opairB v w) (wellOrderB X) <=

```

```

    memB (opairB u w) (wellOrderB X) := by
  rw [memB_opairB_wellOrderB_pair, memB_opairB_wellOrderB_pair,
    memB_opairB_wellOrderB_pair]
  refine (inf_iSup_pair_le _ _).trans' ?_
  refine iSup_le fun p => iSup_le fun q => ?_
  by_cases hjk : p.2 = q.1
  * refine (le_iSup (fun r : X.idx x X.idx =>
    leastIdx X u r.1 sqcap leastIdx X w r.2 sqcap worLe r.1 r.2)
    (p.1, q.2)).trans' ?_
    refine le_inf ?_ ?_
  * exact le_inf (inf_le_of_left_le (inf_le_of_left_le inf_le_left))
    (inf_le_of_right_le (inf_le_of_left_le inf_le_right))
  * refine (worLe_trans (A := A) p.1 p.2 q.2).trans' ?_
    refine le_inf (inf_le_of_left_le inf_le_right) ?_
    have hle : leastIdx X v q.1 sqcap leastIdx X w q.2 sqcap worLe q.1 q.2 <=
      worLe p.2 q.2 := by
      rw [hjk]; exact inf_le_right
    exact hle.trans' inf_le_right
  * have hbot := leastIdx_unique X v p.2 q.1
    simp only [worITE, hjk, reduceIte] at hbot
    exact (hbot.trans' (le_inf
      (inf_le_of_left_le (inf_le_of_left_le inf_le_right))
      (inf_le_of_right_le (inf_le_of_left_le inf_le_left)))).trans bot_le

theorem subset_nonempty_le_childMemY (X Y : AName.{u} A) :
  subsetB Y X sqcap bigcup z, memB z Y <=
    bigcup i : X.idx, memB (X.child i) Y sqcap X.val i := by
  have h := inf_iSup_eq (a := subsetB Y X) (f := fun z : AName.{u} A => memB z Y)
  rw [h]
  refine iSup_le fun z => ?_
  have hz : subsetB Y X sqcap memB z Y <= memB z Y sqcap memB z X :=
    le_inf inf_le_right (by rw [inf_comm]; exact memB_of_subsetB z Y X)
  refine hz.trans' ?_
  have hx := memB_eq (x := z) (y := X)
  rw [hx]
  have h' := inf_iSup_eq (a := memB z Y)
    (f := fun i : X.idx => eqB z (X.child i) sqcap X.val i)
  rw [h']
  refine iSup_le fun i => ?_
  refine (le_iSup (fun j : X.idx => memB (X.child j) Y sqcap X.val j) i).trans' ?_
  have heq : memB z Y sqcap eqB z (X.child i) <= memB (X.child i) Y :=
    memB_eqB_left z Y (X.child i)
  refine le_inf ?_ ?_
  * exact heq.trans' (le_inf inf_le_left (inf_le_of_right_le inf_le_left))
  * exact inf_le_of_right_le inf_le_right

theorem worDisj_childMemY_le_canonVal (X Y : AName.{u} A) (i : X.idx) :
  worDisj (fun j : X.idx => memB (X.child j) Y sqcap X.val j) i <=
    canonVal X i := by
  set a := fun j : X.idx => memB (X.child j) Y sqcap X.val j
  refine le_inf (inf_le_of_left_le inf_le_right) (le_iInf fun j => ?_)
  by_cases hj : WellOrderingRel j i
  * rw [worITE_pos hj]
    refine le_compl_iff_disjoint_right.mpr (disjoint_iff.mpr (bot_unique ?_))
    have hdj : worDisj a i <= (a j)? := worDisj_le_compl a hj
    have hmem : worDisj a i sqcap eqB (X.child i) (X.child j) <=
      memB (X.child j) Y := by
      have hai : worDisj a i <= memB (X.child i) Y :=
        inf_le_of_left_le inf_le_left
      exact (memB_eqB_left (X.child i) Y (X.child j)).trans'
        (le_inf (hai.trans' inf_le_left) inf_le_right)
    have : worDisj a i sqcap (eqB (X.child i) (X.child j) sqcap X.val j) <=
      a j sqcap (a j)? :=

```

```

    le_inf
      (le_inf (hmem.trans' (le_inf inf_le_left (inf_le_of_right_le inf_le_left)))
        (inf_le_of_right_le inf_le_right))
      (hdj.trans' inf_le_left)
    exact this.trans inf_compl_eq_bot.le
  * rw [worITE_neg hj]
  exact le_top

theorem worDisj_childMemY_le_leastIdx (X Y : AName.{u} A) (i : X.idx) :
  worDisj (fun j : X.idx => memB (X.child j) Y sqcap X.val j) i <=
    leastIdx X (X.child i) i := by
  rw [leastIdx_child]
  exact worDisj_childMemY_le_canonVal X Y i

theorem wellOrderB_least_mem (X Y : AName.{u} A) (i : X.idx) (y : AName.{u} A) :
  subsetB Y X sqcap
    worDisj (fun j : X.idx => memB (X.child j) Y sqcap X.val j) i sqcap
    memB y Y <=
    memB (opairB (X.child i) y) (wellOrderB X) := by
  set a := fun j : X.idx => memB (X.child j) Y sqcap X.val j
  have hyX : subsetB Y X sqcap memB y Y <= memB y X := by
    rw [inf_comm]; exact memB_of_subsetB y Y X
  have hreduce :
    subsetB Y X sqcap worDisj a i sqcap memB y Y <=
    worDisj a i sqcap memB y Y sqcap memB y X :=
  le_inf
    (le_inf (inf_le_of_left_le inf_le_right) inf_le_right)
    (hyX.trans' (le_inf (inf_le_of_left_le inf_le_left) inf_le_right))
  rw [memB_opairB_wellOrderB_pair]
  refine hreduce.trans ?_
  rw [ <- leastIdx_iSup (X := X) (u := y)]
  have hdist := inf_iSup_eq (a := worDisj a i sqcap memB y Y)
    (f := fun k : X.idx => leastIdx X y k)
  rw [hdist]
  refine iSup_le fun k => ?_
  by_cases hle : WellOrderingRel i k \ / i = k
  * have hwor : worLe (A := A) i k = top := worITE_pos hle
    refine le_iSup_of_le (i, k) ?_
    rw [hwor, inf_top_eq]
    refine le_inf ?_ inf_le_right
    exact (worDisj_childMemY_le_leastIdx X Y i).trans'
      (inf_le_of_left_le inf_le_left)
  * have hlt : WellOrderingRel k i := by
    rcases trichotomous (r := WellOrderingRel) i k with h | h | h
    * exact (hle (Or.inl h)).elim
    * exact (hle (Or.inr h)).elim
    * exact h
  have h_ak : memB y Y sqcap leastIdx X y k <= a k :=
  le_inf
    ((memB_eqB_left y Y (X.child k)).trans'
      (le_inf inf_le_left ((leastIdx_le_eqB X y k).trans' inf_le_right)))
    ((leastIdx_le_val X y k).trans' inf_le_right)
  have hbot : worDisj a i sqcap memB y Y sqcap leastIdx X y k <= False := by
  have : worDisj a i sqcap memB y Y sqcap leastIdx X y k <= (a k)? sqcap a k :=
  le_inf
    ((worDisj_le_compl a hlt).trans' (inf_le_of_left_le inf_le_left))
    (h_ak.trans' (le_inf (inf_le_of_left_le inf_le_right) inf_le_right))

```

Lean 4 source (lines 3601–3809)

```

    exact this.trans (by rw [inf_comm]; exact inf_compl_eq_bot.le)
  exact hbot.trans bot_le

theorem wellOrderB_least_at (X Y : AName.{u} A) (i : X.idx) :

```



```

subsetB Y X sqcap
  worDisj (fun j : X.idx => memB (X.child j) Y sqcap X.val j) i <=
  memB (X.child i) Y sqcap
  ? y, memB y Y ? memB (opairB (X.child i) y) (wellOrderB X) :=
le_inf
  (inf_le_of_right_le (inf_le_of_left_le inf_le_left))
  (le_iInf fun y => le_himp_iff.mpr (wellOrderB_least_mem X Y i y))

theorem wellOrderB_least (X Y : AName.{u} A) :
  subsetB Y X sqcap bigcup z, memB z Y <=
  bigcup m, memB m Y sqcap
  ? y, memB y Y ? memB (opairB m y) (wellOrderB X) := by
set a := fun j : X.idx => memB (X.child j) Y sqcap X.val j
have hchild := subset_nonempty_le_childMemY (A := A) X Y
rw [ <- worDisj_iSup a] at hchild
have hsub : subsetB Y X sqcap bigcup z, memB z Y <= subsetB Y X sqcap bigcup i,
  worDisj a i :=
  le_inf inf_le_left hchild
have hdist := inf_iSup_eq (a := subsetB Y X) (f := worDisj a)
rw [hdist] at hsub
refine hsub.trans (iSup_le fun i => ?_)
refine (le_iSup (fun m : AName.{u} A =>
  memB m Y sqcap ? y, memB y Y ? memB (opairB m y) (wellOrderB X))
  (X.child i)).trans' ?_
exact wellOrderB_least_at X Y i

theorem wellOrderB_satisfies (X : AName.{u} A) (? : Fin 0 -> AName.{u} A) :
  bval wellOrderAxiom (consName (wellOrderB X) (consName X ?)) = top := by
unfold wellOrderAxiom
simp only [SetFormula.bval_and]
refine inf_eq_top_iff.mpr <?relOn, inf_eq_top_iff.mpr <?refl,
  inf_eq_top_iff.mpr <?antisym, inf_eq_top_iff.mpr <?total,
  inf_eq_top_iff.mpr <?trans, ?least>>>>
* refine iInf_eq_top.mpr fun u => iInf_eq_top.mpr fun v => ?_
rw [SetFormula.bval_implies, himp_eq_top_iff]
have hu : consName v (consName u (consName (wellOrderB X) (consName X ?)))
  (1 : Fin 4) = u := rfl
have hv : consName v (consName u (consName (wellOrderB X) (consName X ?)))
  (0 : Fin 4) = v := rfl
have hR : consName v (consName u (consName (wellOrderB X) (consName X ?)))
  (2 : Fin 4) = wellOrderB X := rfl
have hX : consName v (consName u (consName (wellOrderB X) (consName X ?)))
  (3 : Fin 4) = X := rfl
simp only [SetFormula.bval_and, SetFormula.bval_mem, bval_opairMemF,
  hu, hv, hR, hX]
exact wellOrderB_relOn X u v
* refine iInf_eq_top.mpr fun u => ?_
rw [SetFormula.bval_implies, himp_eq_top_iff]
have hu : consName u (consName (wellOrderB X) (consName X ?))
  (0 : Fin 3) = u := rfl
have hR : consName u (consName (wellOrderB X) (consName X ?))
  (1 : Fin 3) = wellOrderB X := rfl
have hX : consName u (consName (wellOrderB X) (consName X ?))
  (2 : Fin 3) = X := rfl
simp only [SetFormula.bval_mem, bval_opairMemF, hu, hR, hX]
exact wellOrderB_refl X u
* refine iInf_eq_top.mpr fun u => iInf_eq_top.mpr fun v => ?_
rw [SetFormula.bval_implies, himp_eq_top_iff]
have hu : consName v (consName u (consName (wellOrderB X) (consName X ?)))
  (1 : Fin 4) = u := rfl
have hv : consName v (consName u (consName (wellOrderB X) (consName X ?)))
  (0 : Fin 4) = v := rfl
have hR : consName v (consName u (consName (wellOrderB X) (consName X ?)))

```

```

    (2 : Fin 4) = wellOrderB X := rfl
simp only [SetFormula.bval_and, SetFormula.bval_eq, bval_opairMemF,
  hu, hv, hR]
exact wellOrderB_antisym X u v
* refine iInf_eq_top.mpr fun u => iInf_eq_top.mpr fun v => ?_
rw [SetFormula.bval_implies, himp_eq_top_iff]
have hu : consName v (consName u (consName (wellOrderB X) (consName X ?)))
  (1 : Fin 4) = u := rfl
have hv : consName v (consName u (consName (wellOrderB X) (consName X ?)))
  (0 : Fin 4) = v := rfl
have hR : consName v (consName u (consName (wellOrderB X) (consName X ?)))
  (2 : Fin 4) = wellOrderB X := rfl
have hX : consName v (consName u (consName (wellOrderB X) (consName X ?)))
  (3 : Fin 4) = X := rfl
simp only [SetFormula.bval_and, SetFormula.bval_or, SetFormula.bval_mem,
  bval_opairMemF, hu, hv, hR, hX]
exact wellOrderB_total X u v
* refine iInf_eq_top.mpr fun u => iInf_eq_top.mpr fun v =>
  iInf_eq_top.mpr fun w => ?_
rw [SetFormula.bval_implies, himp_eq_top_iff]
have hu : consName w (consName v (consName u
  (consName (wellOrderB X) (consName X ?)))) (2 : Fin 5) = u := rfl
have hv : consName w (consName v (consName u
  (consName (wellOrderB X) (consName X ?)))) (1 : Fin 5) = v := rfl
have hw : consName w (consName v (consName u
  (consName (wellOrderB X) (consName X ?)))) (0 : Fin 5) = w := rfl
have hR : consName w (consName v (consName u
  (consName (wellOrderB X) (consName X ?)))) (3 : Fin 5) =
  wellOrderB X := rfl
simp only [SetFormula.bval_and, bval_opairMemF, hu, hv, hw, hR]
exact wellOrderB_trans X u v w
* refine iInf_eq_top.mpr fun Y => ?_
rw [SetFormula.bval_implies, himp_eq_top_iff]
have hY : consName Y (consName (wellOrderB X) (consName X ?))
  (0 : Fin 3) = Y := rfl
have hR : consName Y (consName (wellOrderB X) (consName X ?))
  (1 : Fin 3) = wellOrderB X := rfl
have hX : consName Y (consName (wellOrderB X) (consName X ?))
  (2 : Fin 3) = X := rfl
have hsub :
  SetFormula.bval (.all (implies (.mem 0 1) (.mem 0 3)))
    (consName Y (consName (wellOrderB X) (consName X ?))) =
  subsetB Y X := by
  rw [subsetB_eq_iInf]
  refine iInf_congr fun z => ?_
  have hz0 : consName z (consName Y (consName (wellOrderB X) (consName X ?)))
    (0 : Fin 4) = z := rfl
  have hz1 : consName z (consName Y (consName (wellOrderB X) (consName X ?)))
    (1 : Fin 4) = Y := rfl
  have hz3 : consName z (consName Y (consName (wellOrderB X) (consName X ?)))
    (3 : Fin 4) = X := rfl
  simp [SetFormula.bval_implies, SetFormula.bval_mem, hz0, hz1, hz3]
have hne :
  SetFormula.bval (.ex (.mem 0 1))
    (consName Y (consName (wellOrderB X) (consName X ?))) =
  bigcup z, memB z Y := by
  refine iSup_congr fun z => ?_
  have hz0 : consName z (consName Y (consName (wellOrderB X) (consName X ?)))
    (0 : Fin 4) = z := rfl
  have hz1 : consName z (consName Y (consName (wellOrderB X) (consName X ?)))
    (1 : Fin 4) = Y := rfl
  simp [SetFormula.bval_mem, hz0, hz1]
have hrhs :

```

```

SetFormula.bval
  (.ex (.and (.mem 0 1)
    (.all (implies (.mem 0 2) (opairMemF 1 0 3))))))
  (consName Y (consName (wellOrderB X) (consName X ?))) =
  bigcup m, memB m Y sqcap
    ? y, memB y Y ? memB (opairB m y) (wellOrderB X) := by
  refine iSup_congr fun m => ?_
  have hm0 : consName m (consName Y (consName (wellOrderB X) (consName X ?)))
    (0 : Fin 4) = m := rfl
  have hm1 : consName m (consName Y (consName (wellOrderB X) (consName X ?)))
    (1 : Fin 4) = Y := rfl
  simp only [SetFormula.bval_and, SetFormula.bval_mem, SetFormula.bval_all,
    SetFormula.bval_implies, hm0, hm1]
  refine congrArg (fun t => memB m Y sqcap t) (iInf_congr fun y => ?_)
  have hy0 : consName y (consName m
    (consName Y (consName (wellOrderB X) (consName X ?))))
    (0 : Fin 5) = y := rfl
  have hy1 : consName y (consName m
    (consName Y (consName (wellOrderB X) (consName X ?))))
    (1 : Fin 5) = m := rfl
  have hy2 : consName y (consName m
    (consName Y (consName (wellOrderB X) (consName X ?))))
    (2 : Fin 5) = Y := rfl
  have hy3 : consName y (consName m
    (consName Y (consName (wellOrderB X) (consName X ?))))
    (3 : Fin 5) = wellOrderB X := rfl
  simp [bval_opairMemF, hy0, hy1, hy2, hy3]
  simp only [SetFormula.bval_and]
  rw [hsub, hne, hrhs]
  exact wellOrderB_least X Y

/-- Jech 14.27: every name is well-orderable in  $V^A$ . -/
theorem axiom_choice_valid (? : Fin 0 -> AName.{u} A) :
  bval choiceAxiom ? = top := by
  unfold choiceAxiom
  rw [all_valid_iff]
  intro X
  exact bval_ex_eq_top_of (wellOrderB X) (wellOrderB_satisfies X ?)

theorem zfcAxiom_valid {n : Nat} {phi : SetFormula n} (h : ZFCAxiom phi)
  (? : Fin n -> AName.{u} A) : bval phi ? = top := by
  cases h with
  | extensionality => exact axiom_extensionality_valid ?
  | pairing => exact axiom_pairing_valid ?
  | union => exact axiom_union_valid ?
  | power => exact axiom_power_valid ?
  | infinity => exact axiom_infinity_valid ?
  | regularity => exact axiom_regularity_valid ?
  | choice => exact axiom_choice_valid ?
  | separation phi => exact axiom_separation_valid phi ?
  | collection phi => exact axiom_collection_valid phi ?

/-- CSL Theorem 1(i): a ZFC theorem has Boolean value `1` at every
assignment in  $V^A$ . -/
theorem theorem_1_i {n : Nat} (phi : SetFormula n) (h : ZFCProvable phi)
  (? : Fin n -> AName.{u} A) : bval phi ? = top := by
  refine h.rec
  (motive := fun {n} (phi : SetFormula n) _ =>
    forall ? : Fin n -> AName.{u} A, bval phi ? = top )
  ?ax ?mp ?gen ?hilbertK ?hilbertS ?hilbertDNE ?allImp ?allVac ?allInst
  ?eqRefl ?eqLeibniz ?
  * intro n phi hax ?; exact zfcAxiom_valid hax ?
  * intro n phi psi _ ihimp ihphi ?

```

```

    exact mp_valid phi psi ? (ihimp ?) (ihphi ?)
* intro n phi _ ih ?
  rw [all_valid_iff]
  exact fun x => ih (consName x ?)
* intro n phi psi ?; exact hilbertK_sound phi psi ?
* intro n phi psi chi ?; exact hilbertS_sound phi psi chi ?
* intro n phi psi ?; exact hilbertDNE_sound phi psi ?
* intro n phi psi ?; exact allImp_sound phi psi ?
* intro n phi psi ?; exact allVac_sound phi psi ?
* intro n phi t ?; exact allInst_sound phi t ?
* intro n ?
  rw [SetFormula.bval_all]
  refine iInf_eq_top.mpr fun x => ?_
  simp [SetFormula.bval_eq, consName, eqB_self]
* intro n phi ?; exact eqLeibniz_sound phi ?

```

end Scott2026

A.12 Scott2026/ExtensionalVA.lean

471 lines.

Lean 4 source (lines 1–400)

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/

import Mathlib.SetTheory.ZFC.Basic
import Scott2026.Oid

/-!
# Extensional domains of Boolean-valued names

The paper defines an `A`-name as a partial function whose domain is a set of
names. `AName` uses an indexed presentation, so its raw index type can list
Boolean-equal children more than once. This module supplies the extensional
domain used by the paper-facing constructions: indices are identified exactly
when their children have Boolean equality `top`.

The recursive Boolean semantics remain those of `AName.memB` and `AName.eqB`.
For checked names, `check_atomic` identifies this quotient with extensional
equality of the corresponding `PSet` children.
-/

universe u

namespace Scott2026

open AName

variable {A : Type u} [CompleteBooleanAlgebra A]

/-- Equality of indices induced by Boolean equality of their child names. -/
def AName.domSetoid (X : AName.{u} A) : Setoid X.idx :=
  Setoid.comap X.child (nameSetoid (A := A))

/-- The extensional domain of an `A`-name. -/
def AName.Dom (X : AName.{u} A) : Type u :=
  Quotient X.domSetoid

```

```

/-- The class of a raw presentation index in the extensional domain. -/
def AName.domMk (X : AName.{u} A) (i : X.idx) : X.Dom :=
  Quotient.mk X.domSetoid i

/-- A chosen presentation index for an extensional-domain element. -/
noncomputable def AName.domOut (X : AName.{u} A) (i : X.Dom) : X.idx :=
  Quotient.out i

/-- A chosen child name representing an extensional-domain element. -/
noncomputable def AName.domChild (X : AName.{u} A) (i : X.Dom) : AName.{u} A :=
  X.child (X.domOut i)

/-- The semantic membership degree of an extensional-domain element. This is
the canonical extent `?t in X?`, not the coefficient of the partial-function
presentation; see `fiberVal`. -/
noncomputable def AName.domVal (X : AName.{u} A) (i : X.Dom) : A :=
  memB (X.domChild i) X

/-- The coefficient of an extensional-domain key: the join of all raw
coefficients presenting that key. -/
noncomputable def AName.fiberVal (X : AName.{u} A) (i : X.Dom) : A :=
  bigcup j : {j : X.idx // X.domMk j = i}, X.val j.1

/-- Collapse duplicate presentations of a name while joining their
coefficients. -/
noncomputable def AName.extensionalize (X : AName.{u} A) : AName.{u} A :=
  mk X.Dom X.domChild X.fiberVal

theorem AName.domMk_eq_iff (X : AName.{u} A) (i j : X.idx) :
  X.domMk i = X.domMk j <-> eqB (X.child i) (X.child j) = top :=
  Quotient.eq

/-- A raw child and the chosen representative of its domain class are
Boolean-equal with value `top`. -/
theorem AName.eqB_child_domChild (X : AName.{u} A) (i : X.idx) :
  eqB (X.child i) (X.domChild (X.domMk i)) = top := by
  change X.domSetoid.r i (X.domOut (X.domMk i))
  apply Quotient.exact
  exact (Quotient.out_eq (X.domMk i)).symm

theorem AName.domVal_domMk (X : AName.{u} A) (i : X.idx) :
  X.domVal (X.domMk i) = memB (X.child i) X := by
  unfold domVal
  rw [eqB_top_memB_left (eqB_child_domChild X i)]

/-- Collapsing duplicate domain presentations and joining their coefficients
does not change Boolean membership. -/
theorem AName.memB_extensionalize (z X : AName.{u} A) :
  memB z X.extensionalize = memB z X := by
  rw [extensionalize, memB_mk, memB_eq]
  apply le_antisymm
  * refine iSup_le fun q => ?_
    rw [fiberVal, inf_iSup_eq]
    refine iSup_le fun j => ?_
    refine le_iSup_of_le j.1 ?_
    have hj : eqB (X.child j.1) (X.domChild q) = top := by
      have h := X.eqB_child_domChild j.1
      rwa [j.2] at h
    have hz : eqB z (X.domChild q) <= eqB z (X.child j.1) := by
      have h := eqB_trans z (X.domChild q) (X.child j.1)
      rw [eqB_comm (X.domChild q) (X.child j.1), hj, inf_top_eq] at h
      exact h
    exact inf_le_inf hz le_refl

```

```

* refine iSup_le fun j => ?_
  refine le_iSup_of_le (X.domMk j) ?_
  have hz : eqB z (X.child j) <= eqB z (X.domChild (X.domMk j)) := by
    have h := eqB_trans z (X.child j) (X.domChild (X.domMk j))
    rw [X.eqB_child_domChild j, inf_top_eq] at h
    exact h
  refine le_inf (inf_le_left.trans hz) ?_
  exact inf_le_right.trans
    (le_iSup (fun k : {k : X.idx // X.domMk k = X.domMk j} => X.val k.1) <j, rfl>)

/-- The extensionalized presentation is Boolean-equal to the original name. -/
theorem AName.eqB_extensionalize (X : AName.{u} A) :
  eqB X X.extensionalize = top := by
  rw [eqB_eq_subset, subsetB_eq_iInf, subsetB_eq_iInf]
  apply inf_eq_top_iff.mpr
  constructor
* exact iInf_eq_top.mpr fun z => by
  rw [memB_extensionalize z X, himp_self]
* exact iInf_eq_top.mpr fun z => by
  rw [memB_extensionalize z X, himp_self]

/-- The domain class of an element in a checked pre-set. -/
noncomputable def AName.checkDomMk (X : PSet.{u}) (i : X.Type) :
  (check (A := A) X).Dom :=
  match X with
  | .mk a f => (check (A := A) (PSet.mk a f)).domMk i

/-- The quotient presentation of the elements of a ground pre-set. -/
def psetElemSetoid (X : PSet.{u}) : Setoid X.Type :=
  Setoid.comap X.Func PSet.setoid

/-- The extensional elements of a ground pre-set. -/
def PSetElem (X : PSet.{u}) : Type u :=
  Quotient (psetElemSetoid X)

/-- `dom(check X)` is the extensional quotient of the elements of `X`. -/
noncomputable def AName.checkDomEquiv [Nontrivial A] (X : PSet.{u}) :
  (check (A := A) X).Dom ? PSetElem X :=
  match X with
  | .mk a f =>
    { toFun := Quotient.map id fun i j h => by
      change eqB (check (A := A) (f i)) (check (f j)) = top at h
      exact (check_atomic (A := A) (f i) (f j)).1.mp h
    invFun := Quotient.map id fun i j h => by
      change PSet.Equiv (f i) (f j) at h
      exact (check_atomic (A := A) (f i) (f j)).1.mpr h
    left_inv := by
      intro i
      induction i using Quotient.inductionOn
      rfl
    right_inv := by
      intro i
      induction i using Quotient.inductionOn
      rfl }

/-- Every coefficient of the extensional presentation of a checked name is
`top`. -/
theorem AName.fiberVal_check (X : PSet.{u})
  (i : (check (A := A) X).Dom) :
  (check (A := A) X).fiberVal i = top := by
  cases X with
  | mk a f =>
    apply top_unique

```

```

let j : {j : (check (A := A) (PSet.mk a f)).idx //
  (check (A := A) (PSet.mk a f)).domMk j = i} :=
  <(check (A := A) (PSet.mk a f)).domOut i, Quotient.out_eq i>
refine le_iSup_of_le j ?_
exact le_rfl

/-- A checked name whose raw keys have already been quotiented by extensional
`PSet` equality. -/
noncomputable def checkExt (X : PSet.{u}) : AName.{u} A :=
  mk (PSetElem X)
    (fun i => check (A := A) (X.Func (Quotient.out i)))
    (fun _ => top )

/-- Quotienting the keys of a checked name does not change membership. -/
theorem memB_checkExt (z : AName.{u} A) (X : PSet.{u}) [Nontrivial A] :
  memB z (checkExt (A := A) X) = memB z (check (A := A) X) := by
  cases X with
  | mk a f =>
    rw [checkExt, check_mk, memB_mk, memB_mk]
    apply le_antisymm
    * refine iSup_le fun q => ?_
      exact le_iSup_of_le (Quotient.out q) le_rfl
    * refine iSup_le fun i => ?_
      let q : PSetElem (PSet.mk a f) :=
        Quotient.mk (psetElemSetoid (PSet.mk a f)) i
      refine le_iSup_of_le q ?_
      rw [inf_top_eq, inf_top_eq]
      have hout : PSet.Equiv (f (Quotient.out q)) (f i) := by
        exact Quotient.exact (Quotient.out_eq q)
      have heq :
        eqB (check (A := A) (f i))
          (check (A := A) (f (Quotient.out q))) = top :=
        (check_atomic (A := A) _ _).1.mpr hout.symm
      exact (eqB_trans z (check (A := A) (f i))
        (check (A := A) (f (Quotient.out q))))'.trans'
        (le_inf le_rfl (le_top.trans heq.ge))

/-- The extensional checked presentation denotes the ordinary checked name. -/
theorem eqB_check_checkExt (X : PSet.{u}) [Nontrivial A] :
  eqB (check (A := A) X) (checkExt (A := A) X) = top := by
  rw [eqB_eq_iInf]
  refine iInf_eq_top.mpr fun z => inf_eq_top_iff.mpr <?_, ?_>
  * rw [memB_checkExt, himp_self]
  * rw [memB_checkExt, himp_self]

/-- `checkExt` depends only on the extensional ZFC set represented by a
pre-set, not on the chosen pre-set presentation. -/
theorem eqB_checkExt_congr {X Y : PSet.{u}} [Nontrivial A]
  (h : PSet.Equiv X Y) :
  eqB (checkExt (A := A) X) (checkExt (A := A) Y) = top := by
  have hX : eqB (checkExt (A := A) X) (check (A := A) X) = top := by
    rw [eqB_comm]
    exact eqB_check_checkExt X
  have hXY : eqB (check (A := A) X) (check (A := A) Y) = top :=
    (check_atomic (A := A) X Y).1.mpr h
  have hY : eqB (check (A := A) Y) (checkExt (A := A) Y) = top :=
    eqB_check_checkExt Y
  have hXY' :
    eqB (checkExt (A := A) X) (check (A := A) Y) = top := by
    apply top_unique
    exact (le_inf hX.ge hXY.ge).trans (eqB_trans _ _ _)
  apply top_unique
  exact (le_inf hXY'.ge hY.ge).trans (eqB_trans _ _ _)

```

```

/-- Paper-facing check embedding from Mathlib's extensional ZFC universe.
The use of `out` is hidden behind `eqB_checkZF_mk`, so no theorem can observe
which pre-set representative was chosen. -/
noncomputable def checkZF (X : ZFSet.{u}) : AName.{u} A :=
  checkExt (A := A) X.out

/-- A small, extensional type of variables/elements for a paper-facing ZFC
set. Unlike `PSet.Type`, this carrier has no duplicate presentations. -/
abbrev ZFSetElem (X : ZFSet.{u}) : Type u :=
  (checkZF (A := A) X).idx

/-- The checked name attached to a paper-facing ZFC set has exactly its
extensional small element carrier as domain. -/
theorem checkZF_idx (X : ZFSet.{u}) :
  (checkZF (A := A) X).idx = ZFSetElem (A := A) X :=
  rfl

/-- Checking a quotient class agrees, at Boolean equality `top`, with checking
any pre-set representative of that class. -/
theorem eqB_checkZF_mk (X : PSet.{u}) [Nontrivial A] :
  eqB (checkZF (A := A) (ZFSet.mk X)) (checkExt (A := A) X) = top := by
  apply eqB_checkExt_congr
  apply ZFSet.eq.mp
  exact (ZFSet.mk_out (ZFSet.mk X)).trans (ZFSet.mk_eq X).symm

/-- The paper-facing check embedding is definitionally congruent for equality
in the extensional ZFC universe. -/
theorem checkZF_congr {X Y : ZFSet.{u}} (h : X = Y) :
  checkZF (A := A) X = checkZF (A := A) Y :=
  congrArg (checkZF (A := A)) h

/-- Extensional equality of parameters is preserved by `powerB`. -/
theorem eqB_powerB_congr {X Y : AName.{u} A} (h : eqB X Y = top) :
  eqB (powerB X) (powerB Y) = top := by
  rw [eqB_eq_iInf]
  refine iInf_eq_top.mpr fun z => ?_
  have hs : subsetB z X = subsetB z Y := by
    rw [subsetB_eq_iInf, subsetB_eq_iInf]
  exact iInf_congr fun u =>
    congrArg (fun t => memB u z ? t) (eqB_top_memB_right (z := u) h)
  apply inf_eq_top_iff.mpr
  constructor
  * rw [memB_powerB, memB_powerB, hs, himp_self]
  * rw [memB_powerB, memB_powerB, hs, himp_self]

/-- Distinct keys of `checkExt X` have Boolean equality `False`. -/
theorem eqB_checkExt_child (X : PSet.{u}) [Nontrivial A]
  (i j : (checkExt (A := A) X).idx) :
  (i = j ->
    eqB ((checkExt (A := A) X).child i)
      ((checkExt (A := A) X).child j) = top) /\
  (i != j ->
    eqB ((checkExt (A := A) X).child i)
      ((checkExt (A := A) X).child j) = False) := by
  constructor
  * intro hij
    subst j
    exact eqB_self _
  * intro hij
    apply (check_atomic (A := A) _ _).2.1.mpr
    intro hequiv
    apply hij

```



```

have hout :
  Quotient.mk (psetElemSetoid X) (Quotient.out i) =
    Quotient.mk (psetElemSetoid X) (Quotient.out j) :=
    Quotient.sound hequiv
exact (Quotient.out_eq i).symm.trans (hout.trans (Quotient.out_eq j))

/-- Membership in a name over the discrete keys of `checkExt X` is pointwise
evaluation. -/
theorem memB_child_mk_checkExt (X : PSet.{u}) [Nontrivial A]
  (v : (checkExt (A := A) X).idx -> A)
  (i : (checkExt (A := A) X).idx) :
  memB ((checkExt (A := A) X).child i)
    (mk (checkExt (A := A) X).idx (checkExt (A := A) X).child v) = v i := by
classical
rw [memB_mk]
apply le_antisymm
* refine iSup_le fun j => ?_
  by_cases hij : i = j
  * subst j
    rw [(eqB_checkExt_child (A := A) X i i).1 rfl, top_inf_eq]
  * rw [(eqB_checkExt_child (A := A) X i j).2 hij, bot_inf_eq]
    exact bot_le
* exact le_iSup_of_le i (by rw [eqB_self, top_inf_eq])

/-- Membership in a subset of `checkExt X` is pointwise evaluation. -/
theorem memB_child_powerB_checkExt (X : PSet.{u}) [Nontrivial A]
  (v : (powerB (checkExt (A := A) X)).idx)
  (i : (checkExt (A := A) X).idx) :
  memB ((checkExt (A := A) X).child i)
    ((powerB (checkExt (A := A) X)).child v) = v.1 i := by
change memB ((checkExt (A := A) X).child i)
  (mk (checkExt (A := A) X).idx (checkExt (A := A) X).child v.1) = v.1 i
exact memB_child_mk_checkExt X v.1 i

/-- The raw `powerB` construction is strict when its checked base has
extensional keys. This is the paper's strictness argument without duplicate
`PSet` presentations. -/
theorem oid_powerB_checkExt_isStrict (X : PSet.{u}) [Nontrivial A] :
  (oid (powerB (checkExt (A := A) X))).IsStrict := by
classical
intro v w h
rw [oid_eq_powerB] at h
apply Subtype.ext
funext i
apply le_antisymm
* have hsub : subsetB
  ((powerB (checkExt (A := A) X)).child v)
  ((powerB (checkExt (A := A) X)).child w) = top :=
  top_unique (h.ge.trans (eqB_le_subsetB _ _))
change subsetB
  (mk (checkExt (A := A) X).idx (checkExt (A := A) X).child v.1)
  (mk (checkExt (A := A) X).idx (checkExt (A := A) X).child w.1) = top at hsub
rw [subsetB_mk] at hsub
have hi := iInf_eq_top.mp hsub i
rw [himp_eq_top_iff, memB_child_mk_checkExt X w.1 i] at hi
exact hi
* have heq : eqB
  ((powerB (checkExt (A := A) X)).child w)
  ((powerB (checkExt (A := A) X)).child v) = top := by
  rwa [eqB_comm]
have hsub : subsetB
  ((powerB (checkExt (A := A) X)).child w)
  ((powerB (checkExt (A := A) X)).child v) = top :=

```

```

    top_unique (heq.ge.trans (eqB_le_subsetB _ _))
change subsetB
  (mk (checkExt (A := A) X).idx (checkExt (A := A) X).child w.1)
  (mk (checkExt (A := A) X).idx (checkExt (A := A) X).child v.1) = top at hsub
rw [subsetB_mk] at hsub
have hi := iInf_eq_top.mp hsub i
rw [himp_eq_top_iff, memB_child_mk_checkExt X v.1 i] at hi
exact hi

/-- Extensional valuations bounded by the partial-function coefficients of
`X`. These are the functions that form the paper-facing  $P^A(X)$ . -/
def ExtensionalPowerIdx (X : AName.{u} A) : Type u :=
  {v : X.Dom → A // forall i, v i ≤ X.fiberVal i}

/-- The name represented by an extensional bounded valuation. -/
noncomputable def extensionalPowerName (X : AName.{u} A)
  (v : ExtensionalPowerIdx X) : AName.{u} A :=
  mk X.Dom X.domChild v.1

/-- A representative of an element of  $\text{dom}(\text{check } X)$  is itself a checked
ground set. -/
theorem AName.exists_eq_check_domChild (X : PSet.{u})
  (i : (check (A := A) X).Dom) :
  exists x : PSet.{u}, (check (A := A) X).domChild i = check (A := A) x := by
cases X with
| mk a f =>
  exact <f ((check (A := A) (PSet.mk a f)).domOut i), rfl>

/-- Checked ground-set elements are Boolean-discrete after quotienting the
presentation domain by equality at  $\text{top}$ . -/
theorem AName.eqB_check_domChild (X : PSet.{u}) [Nontrivial A]
  (i j : (check (A := A) X).Dom) :
  (i = j →
    eqB ((check (A := A) X).domChild i) ((check (A := A) X).domChild j) = top) /\
  (i != j →
    eqB ((check (A := A) X).domChild i) ((check (A := A) X).domChild j) = False) := by
classical
obtain <x, hx> := AName.exists_eq_check_domChild (A := A) X i
obtain <y, hy> := AName.exists_eq_check_domChild (A := A) X j
constructor
* intro hij
  subst j
  rw [eqB_self]
* intro hij
  rw [hx, hy]
  apply (check_atomic (A := A) _ _).2.1.mpr

```

Lean 4 source (lines 401–471)

```

intro hequiv
apply hij
have hrel : (check (A := A) X).domSetoid.r
  (Quotient.out i) (Quotient.out j) := by
  change eqB ((check (A := A) X).domChild i)
    ((check (A := A) X).domChild j) = top
  rw [hx, hy]
  exact (check_atomic (A := A) x y).1.mpr hequiv
have hout :
  Quotient.mk (check (A := A) X).domSetoid (Quotient.out i) =
    Quotient.mk (check (A := A) X).domSetoid (Quotient.out j) :=
  Quotient.sound hrel
exact (Quotient.out_eq i).symm.trans (hout.trans (Quotient.out_eq j))

/-- Membership in an extensional subset of a checked set is evaluation of its

```

```

valuation. This is the calculation used in the paper's strictness proof. -/
theorem memB_domChild_extensionalPowerName_check (X : PSet.{u}) [Nontrivial A]
  (v : ExtensionalPowerIdx (check (A := A) X))
  (i : (check (A := A) X).Dom) :
  memB ((check (A := A) X).domChild i)
    (extensionalPowerName (check (A := A) X) v) = v.1 i := by
classical
rw [extensionalPowerName, memB_mk]
refine le_antisymm (iSup_le fun j => ?_) ?_
* by_cases hij : i = j
  * subst j
    rw [(AName.eqB_check_domChild X i i).1 rfl, top_inf_eq]
  * rw [(AName.eqB_check_domChild X i j).2 hij, bot_inf_eq]
    exact bot_le
* exact le_iSup_of_le i (by rw [eqB_self, top_inf_eq])

/-- The paper-facing setoid of  $P^A(X)$  on extensional bounded valuations. -/
noncomputable def extensionalPowerSetoid (X : AName.{u} A) :
  ASetoid (A := A) (ExtensionalPowerIdx X) where
  eq v w := eqB (extensionalPowerName X v) (extensionalPowerName X w)
  symm v w := eqB_comm _ _
  trans v w z := eqB_trans _ _ _

/-- Proposition 28 strictness calculation on the paper's extensional
presentation of  $P^A(\text{check } X)$ . -/
theorem extensionalPowerSetoid_check_isStrict (X : PSet.{u}) [Nontrivial A] :
  (extensionalPowerSetoid (check (A := A) X)).IsStrict := by
classical
intro v w h
apply Subtype.ext
funext i
apply le_antisymm
* have hsub : subsetB
  (extensionalPowerName (check (A := A) X) v)
  (extensionalPowerName (check (A := A) X) w) = top := by
  exact top_unique (h.ge.trans (eqB_le_subsetB _ _))
rw [extensionalPowerName, subsetB_mk] at hsub
have hi := iInf_eq_top.mp hsub i
rw [himp_eq_top_iff,
  memB_domChild_extensionalPowerName_check X w i] at hi
exact hi
* have heq : eqB
  (extensionalPowerName (check (A := A) X) w)
  (extensionalPowerName (check (A := A) X) v) = top := by
  rwa [eqB_comm]
have hsub : subsetB
  (extensionalPowerName (check (A := A) X) w)
  (extensionalPowerName (check (A := A) X) v) = top :=
  top_unique (heq.ge.trans (eqB_le_subsetB _ _))
rw [extensionalPowerName, subsetB_mk] at hsub
have hi := iInf_eq_top.mp hsub i
rw [himp_eq_top_iff,
  memB_domChild_extensionalPowerName_check X v i] at hi
exact hi
end Scott2026

```

A.13 Scott2026/InternalDomain.lean

1618 lines.

Lean 4 source (lines 1–400)

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/

import Scott2026.VA

/-!
# Internal way-below / continuous-lattice language in `V^A`

Furber-Mardare-Panangaden-Scott, CSL 2026, S4.1 and Proposition 28 / Corollary 34.
The paper interprets ?continuous lattice? and `<<` in `V^A`. This module supplies
the `?_Set(V^A)` formulas (subset order) and matching semantic Boolean values.

`corollary_34` remains unnamed: the paper type is the internal statement that
`P^A(check E)` is a reflexive continuous lattice with numerals. The numerals
half is `corollary_34_check`. The continuous-lattice half is
`isContinuousLatticeSubsetB_powerB`. This file proves the language, `<<` -> `subseq`,
directedness of `P_fin^A`, `T` subseq `P_fin^A(T)`, `isFiniteB_of_subset`,
both directions of `<<` <-> `finite` subseq under weaker names
(`wayBelowSubsetB_le_finite_subset`, `wayBelowSubsetB_of_finite_subset`),
the subseq -sup of a family in `P^A(X)` via the tight union `sUnionB`
(`isCompleteLatticeSubsetB_powerB`), directed-down / joins-down at
each `d` in `P^A(X)`, the base clause
`isBaseSubsetB (pfin B X) (powerB X) = top`, congruence of that predicate
in the base under `eqB B B' = top`, and the check-base transfer
`isBaseSubsetB (check (pfin Y)) (powerB (check Y)) = top`. Not
`proposition_27` / `proposition_28` (those names are the ground `Set X`
statements). Fat `unionB` remains the one-sided ZFC witness
(`memB_unionB_of_mem` only).
-/

universe u

namespace Scott2026

open AName
open SetFormula
open DOFormula (consName consName_zero consName_succ)
open Classical

variable {A : Type u} [CompleteBooleanAlgebra A]

noncomputable section

/-!
## Semantic Boolean values (subset order)
-/

/-- `x` subseq `x` at Boolean value `1`. -/
theorem subsetB_refl (x : AName.{u} A) : subsetB x x = top :=
  iInf_eq_top.mpr fun i => himp_eq_top_iff.mpr (val_le_memB x i)

/-- `S` is nonempty. -/
noncomputable def nonemptyB (S : AName.{u} A) : A :=
  bigcup x : AName.{u} A, memB x S

/-- `e` subseq `? S`. -/
noncomputable def subsetUnionB (e S : AName.{u} A) : A :=
  ? x : AName.{u} A, memB x e ? bigcup y : AName.{u} A, memB y S sqcap memB x y

/-- `x` is a `subseq` -upper bound of `S`. -/

```

```

noncomputable def isUpperBoundSubsetB (x S : AName.{u} A) : A :=
  ? y : AName.{u} A, memB y S ? subsetB y x

/-- `x` is the `subseq`-supremum of `S`. -/
noncomputable def isSupSubsetB (x S : AName.{u} A) : A :=
  isUpperBoundSubsetB x S sqcap
  ? y : AName.{u} A, isUpperBoundSubsetB y S ? subsetB x y

/-- `S` is directed under `subseq`. -/
noncomputable def isDirectedSubsetB (S : AName.{u} A) : A :=
  nonemptyB S sqcap
  ? u : AName.{u} A, ? v : AName.{u} A,
    memB u S sqcap memB v S ?
    bigcup w : AName.{u} A, memB w S sqcap subsetB u w sqcap subsetB v w

/-- `d << e` in the subset order (CSL S4.1). -/
noncomputable def wayBelowSubsetB (d e : AName.{u} A) : A :=
  ? S : AName.{u} A,
    isDirectedSubsetB S ?
    subsetUnionB e S ?
    bigcup s : AName.{u} A, memB s S sqcap subsetB d s

/-- `D` is a complete lattice under `subseq`. -/
noncomputable def isCompleteLatticeSubsetB (D : AName.{u} A) : A :=
  ? S : AName.{u} A, subsetB S D ?
  bigcup s : AName.{u} A, memB s D sqcap isSupSubsetB s S

/-- `e` in `D` and `e << d`. -/
noncomputable def inWayBelowDownB (e d D : AName.{u} A) : A :=
  memB e D sqcap wayBelowSubsetB e d

/-- `{e in D | e << d}` is directed. -/
noncomputable def directedDownB (d D : AName.{u} A) : A :=
  ( bigcup e : AName.{u} A, inWayBelowDownB e d D ) sqcap
  ? e1 : AName.{u} A, ? e2 : AName.{u} A,
    inWayBelowDownB e1 d D sqcap inWayBelowDownB e2 d D ?
    bigcup e3 : AName.{u} A,
    inWayBelowDownB e3 d D sqcap subsetB e1 e3 sqcap subsetB e2 e3

/-- `d = ? {e in D | e << d}`. -/
noncomputable def joinsDownB (d D : AName.{u} A) : A :=
  ? x : AName.{u} A,
    (memB x d ? bigcup e : AName.{u} A, inWayBelowDownB e d D sqcap memB x e) sqcap
    (( bigcup e : AName.{u} A, inWayBelowDownB e d D sqcap memB x e ) ? memB x d)

/-- Continuity of `D` at `d` (subset order). -/
noncomputable def isContinuousAtSubsetB (d D : AName.{u} A) : A :=
  directedDownB d D sqcap joinsDownB d D

/-- `D` is a continuous lattice under `subseq`. -/
noncomputable def isContinuousLatticeSubsetB (D : AName.{u} A) : A :=
  isCompleteLatticeSubsetB D sqcap
  ? d : AName.{u} A, memB d D ? isContinuousAtSubsetB d D

/-- `B` is a base for `D` under `subseq`. -/
noncomputable def isBaseSubsetB (B D : AName.{u} A) : A :=
  subsetB B D sqcap
  ? d : AName.{u} A, memB d D ?
    (( bigcup e : AName.{u} A, memB e B sqcap wayBelowSubsetB e d ) sqcap
    ? e1 : AName.{u} A, ? e2 : AName.{u} A,
      memB e1 B sqcap wayBelowSubsetB e1 d sqcap
      (memB e2 B sqcap wayBelowSubsetB e2 d) ?
      bigcup e3 : AName.{u} A,

```

```

        memB e3 B sqcap wayBelowSubsetB e3 d sqcap
        subsetB e1 e3 sqcap subsetB e2 e3) sqcap
    ? x : AName.{u} A,
    (memB x d ?
        bigcup e : AName.{u} A, memB e B sqcap wayBelowSubsetB e d sqcap memB x e)
    sqcap
    (( bigcup e : AName.{u} A, memB e B sqcap wayBelowSubsetB e d sqcap memB x e)
    ?
        memB x d)

/-!
## `?_Set` formulas
-/

/-- `x` subseq `y` as `forall z (z in x -> z in y)`. -/
def subsetF {n} (i j : Fin n) : SetFormula n :=
    .all (implies (.mem 0 i.succ) (.mem 0 j.succ))

/-- `exists x. x in S`. -/
def nonemptyF {n} (S : Fin n) : SetFormula n :=
    .ex (.mem 0 S.succ)

/-- `e` subseq `? S` as `forall x (x in e -> exists y (y in S /\ x in y))`. -/
def subsetUnionF {n} (e S : Fin n) : SetFormula n :=
    .all (implies (.mem 0 e.succ)
        (.ex (.and (.mem 0 S.succ.succ) (.mem 1 0))))

/-- `x` is a `subseq` -upper bound of `S`. -/
def isUpperBoundSubsetF {n} (x S : Fin n) : SetFormula n :=
    .all (implies (.mem 0 S.succ) (subsetF 0 x.succ))

/-- `x` is the `subseq` -supremum of `S`. -/
def isSupSubsetF {n} (x S : Fin n) : SetFormula n :=
    (isUpperBoundSubsetF x S).and
    (.all (implies (isUpperBoundSubsetF 0 S.succ) (subsetF x.succ 0)))

/-- `S` is directed under `subseq`. -/
def isDirectedSubsetF {n} (S : Fin n) : SetFormula n :=
    (nonemptyF S).and
    (.all (.all (implies
        (.and (.mem 1 S.succ.succ) (.mem 0 S.succ.succ))
        (.ex (.and (.mem 0 S.succ.succ.succ)
            (.and (subsetF 2 0) (subsetF 1 0)))))))

/-- `d << e` under `subseq`. -/
def wayBelowSubsetF {n} (d e : Fin n) : SetFormula n :=
    .all (implies (isDirectedSubsetF 0)
        (implies (subsetUnionF e.succ 0)
            (.ex (.and (.mem 0 1) (subsetF d.succ.succ 0)))))

/-- `D` is a complete lattice under `subseq`. -/
def isCompleteLatticeSubsetF {n} (D : Fin n) : SetFormula n :=
    .all (implies (subsetF 0 D.succ)
        (.ex (.and (.mem 0 D.succ.succ) (isSupSubsetF 0 1))))

/-- `e in D /\ e << d`. -/
def inWayBelowDownF {n} (e d D : Fin n) : SetFormula n :=
    SetFormula.and (.mem e D) (wayBelowSubsetF e d)

/-- `{e in D | e << d}` is directed. -/
def directedDownF {n} (d D : Fin n) : SetFormula n :=
    SetFormula.and (.ex (inWayBelowDownF 0 d.succ D.succ))
    (.all (.all (implies

```

```

      (SetFormula.and (inWayBelowDownF 1 d.succ.succ D.succ.succ)
        (inWayBelowDownF 0 d.succ.succ D.succ.succ))
      (.ex (SetFormula.and (inWayBelowDownF 0 d.succ.succ.succ D.succ.succ.succ)
        (SetFormula.and (subsetF 2 0) (subsetF 1 0))))))

/-- `d = ? {e in D | e << d}`. -/
def joinsDownF {n} (d D : Fin n) : SetFormula n :=
  .all (iff (.mem 0 d.succ)
    (.ex (.and (inWayBelowDownF 0 d.succ.succ D.succ.succ) (.mem 1 0))))

/-- Continuity of `D` at `d`. -/
def isContinuousAtSubsetF {n} (d D : Fin n) : SetFormula n :=
  SetFormula.and (directedDownF d D) (joinsDownF d D)

/-- `D` is a continuous lattice under `subseq`. -/
def isContinuousLatticeSubsetF {n} (D : Fin n) : SetFormula n :=
  SetFormula.and (isCompleteLatticeSubsetF D)
    (.all (implies (.mem 0 D.succ) (isContinuousAtSubsetF 0 D.succ)))

/-- `B` is a base for `D`: for each `d` in `D`, the elements of `B` way-below
`d` are directed and join to `d`. -/
def isBaseSubsetF {n} (B D : Fin n) : SetFormula n :=
  SetFormula.and (subsetF B D)
    (.all (implies (.mem 0 D.succ) (isContinuousAtSubsetF 0 B.succ)))

/-- `<<` implies `subseq`, as a closed `?_Set` sentence. -/
def wayBelow_le_formula : SetFormula 0 :=
  .all (.all (implies (wayBelowSubsetF 0 1) (subsetF 0 1)))

/-!
## Boolean values of the formulas
-/

theorem bval_subsetF {n} (i j : Fin n) (? : Fin n -> AName.{u} A) :
  bval (subsetF i j) ? = subsetB (? i) (? j) := by
  unfold subsetF
  rw [bval_all, subsetB_eq_iInf]
  refine iInf_congr fun z => ?_
  have hi : consName z ? i.succ = ? i := consName_succ z ? i
  have hj : consName z ? j.succ = ? j := consName_succ z ? j
  simp [bval_implies, bval_mem, hi, hj]

theorem bval_nonemptyF {n} (S : Fin n) (? : Fin n -> AName.{u} A) :
  bval (nonemptyF S) ? = nonemptyB (? S) := by
  unfold nonemptyF nonemptyB
  rw [bval_ex]
  refine iSup_congr fun x => ?_
  simp [bval_mem, consName_succ]

omit [CompleteBooleanAlgebra A] in
theorem consName_one {n} (v u : AName.{u} A) (? : Fin n -> AName.{u} A) :
  consName v (consName u ?) (1 : Fin (n + 2)) = u := by
  rw [show (1 : Fin (n + 2)) = (0 : Fin (n + 1)).succ from rfl,
    consName_succ, consName_zero]

omit [CompleteBooleanAlgebra A] in
theorem consName_two {n} (w v u : AName.{u} A) (? : Fin n -> AName.{u} A) :
  consName w (consName v (consName u ?)) (2 : Fin (n + 3)) = u := by
  rw [show (2 : Fin (n + 3)) = (1 : Fin (n + 2)).succ from rfl, consName_succ,
    consName_one]

theorem bval_subsetUnionF {n} (e S : Fin n) (? : Fin n -> AName.{u} A) :
  bval (subsetUnionF e S) ? = subsetUnionB (? e) (? S) := by

```

```

unfold subsetUnionF subsetUnionB
rw [bval_all]
refine iInf_congr fun x => ?_
have he : consName x ? e.succ = ? e := consName_succ x ? e
simp only [bval_implies, bval_mem, he]
refine congrArg (fun t => memB x (? e) ? t) ?_
rw [bval_ex]
refine iSup_congr fun y => ?_
have hy0 : consName y (consName x ?) 0 = y := consName_zero _ _
have hx1 : consName y (consName x ?) (1 : Fin (n + 2)) = x :=
  consName_one y x ?
have hS : consName y (consName x ?) S.succ.succ = ? S := by
  rw [consName_succ, consName_succ]
simp [bval_and, bval_mem, hy0, hx1, hS]

theorem bval_isUpperBoundSubsetF {n} (x S : Fin n) (? : Fin n -> AName.{u} A) :
  bval (isUpperBoundSubsetF x S) ? = isUpperBoundSubsetB (? x) (? S) := by
  unfold isUpperBoundSubsetF isUpperBoundSubsetB
  rw [bval_all]
  refine iInf_congr fun y => ?_
  have hS : consName y ? S.succ = ? S := consName_succ y ? S
  have hx : consName y ? x.succ = ? x := consName_succ y ? x
  simp [bval_implies, bval_mem, bval_subsetF, hS, hx]

theorem bval_isSupSubsetF {n} (x S : Fin n) (? : Fin n -> AName.{u} A) :
  bval (isSupSubsetF x S) ? = isSupSubsetB (? x) (? S) := by
  unfold isSupSubsetF isSupSubsetB
  rw [bval_and, bval_isUpperBoundSubsetF]
  refine congrArg (fun t => isUpperBoundSubsetB (? x) (? S) sqcap t) ?_
  rw [bval_all]
  refine iInf_congr fun y => ?_
  have hS : consName y ? S.succ = ? S := consName_succ y ? S
  have hx : consName y ? x.succ = ? x := consName_succ y ? x
  have hy0 : consName y ? 0 = y := consName_zero _ _
  simp [bval_implies, bval_isUpperBoundSubsetF, bval_subsetF, hS, hx, hy0]

theorem bval_isDirectedSubsetF {n} (S : Fin n) (? : Fin n -> AName.{u} A) :
  bval (isDirectedSubsetF S) ? = isDirectedSubsetB (? S) := by
  unfold isDirectedSubsetF isDirectedSubsetB
  rw [bval_and, bval_nonemptyF]
  refine congrArg (fun t => nonemptyB (? S) sqcap t) ?_
  rw [bval_all]
  refine iInf_congr fun u => ?_
  rw [bval_all]
  refine iInf_congr fun v => ?_
  have hS : consName v (consName u ?) S.succ.succ = ? S := by
    rw [consName_succ, consName_succ]
  have hu : consName v (consName u ?) (1 : Fin (n + 2)) = u :=
    consName_one v u ?
  have hv : consName v (consName u ?) 0 = v := consName_zero _ _
  simp only [bval_implies, bval_and, bval_mem, hS, hu, hv]
  refine congrArg (fun t => memB u (? S) sqcap memB v (? S) ? t) ?_
  rw [bval_ex]
  refine iSup_congr fun w => ?_
  have hw0 : consName w (consName v (consName u ?)) 0 = w := consName_zero _ _
  have hv1 : consName w (consName v (consName u ?)) (1 : Fin (n + 3)) = v := by
    rw [show (1 : Fin (n + 3)) = (0 : Fin (n + 2)).succ from rfl,
      consName_succ, consName_zero]
  have hu2 : consName w (consName v (consName u ?)) (2 : Fin (n + 3)) = u :=
    consName_two w v u ?
  have hS' : consName w (consName v (consName u ?)) S.succ.succ.succ = ? S := by
    rw [consName_succ, consName_succ, consName_succ]
  simp [bval_and, bval_mem, bval_subsetF, hw0, hv1, hu2, hS']

```



```

ac_rfl

theorem bval_wayBelowSubsetF {n} (d e : Fin n) (? : Fin n -> AName.{u} A) :
  bval (wayBelowSubsetF d e) ? = wayBelowSubsetB (? d) (? e) := by
  unfold wayBelowSubsetF wayBelowSubsetB
  rw [bval_all]
  refine iInf_congr fun S => ?_
  have h0 : consName S ? 0 = S := consName_zero _ _
  have he : consName S ? e.succ = ? e := consName_succ S ? e
  rw [bval_implies, bval_isDirectedSubsetF, h0]
  refine congrArg (fun t => isDirectedSubsetB S ? t) ?_
  rw [bval_implies, bval_subsetUnionF, he, h0]
  refine congrArg (fun t => subsetUnionB (? e) S ? t) ?_
  rw [bval_ex]
  refine iSup_congr fun s => ?_
  have hs0 : consName s (consName S ?) 0 = s := consName_zero _ _
  have hS1 : consName s (consName S ?) (1 : Fin (n + 2)) = S :=
    consName_one s S ?
  have hd : consName s (consName S ?) d.succ.succ = ? d := by
    rw [consName_succ, consName_succ]
  simp [bval_and, bval_mem, bval_subsetF, hs0, hS1, hd]

theorem bval_isCompleteLatticeSubsetF {n} (D : Fin n)
  (? : Fin n -> AName.{u} A) :
  bval (isCompleteLatticeSubsetF D) ? =
    isCompleteLatticeSubsetB (? D) := by
  unfold isCompleteLatticeSubsetF isCompleteLatticeSubsetB
  rw [bval_all]
  refine iInf_congr fun S => ?_
  have hD : consName S ? D.succ = ? D := consName_succ S ? D
  have h0 : consName S ? 0 = S := consName_zero _ _
  simp only [bval_implies, bval_subsetF, hD, h0]
  refine congrArg (fun t => subsetB S (? D) ? t) ?_
  rw [bval_ex]
  refine iSup_congr fun s => ?_
  have hs0 : consName s (consName S ?) 0 = s := consName_zero _ _
  have hS1 : consName s (consName S ?) (1 : Fin (n + 2)) = S :=
    consName_one s S ?
  have hD' : consName s (consName S ?) D.succ.succ = ? D := by
    rw [consName_succ, consName_succ]
  simp [bval_and, bval_mem, bval_isSupSubsetF, hs0, hS1, hD']

theorem bval_inWayBelowDownF {n} (e d D : Fin n) (? : Fin n -> AName.{u} A) :
  bval (inWayBelowDownF e d D) ? = inWayBelowDownB (? e) (? d) (? D) := by
  unfold inWayBelowDownF inWayBelowDownB
  simp [bval_and, bval_mem, bval_wayBelowSubsetF]

theorem bval_directedDownF {n} (d D : Fin n) (? : Fin n -> AName.{u} A) :
  bval (directedDownF d D) ? = directedDownB (? d) (? D) := by
  unfold directedDownF directedDownB
  rw [bval_and, bval_ex]
  refine congrArg_2 (* sqcap *) ?_ ?_
  * refine iSup_congr fun e => ?_
    simp [bval_inWayBelowDownF, consName_zero, consName_succ]
  * rw [bval_all]
    refine iInf_congr fun e1 => ?_
    rw [bval_all]
    refine iInf_congr fun e2 => ?_
    have hd : consName e2 (consName e1 ?) d.succ.succ = ? d := by
      rw [consName_succ, consName_succ]
    have hD : consName e2 (consName e1 ?) D.succ.succ = ? D := by
      rw [consName_succ, consName_succ]
    have he1 : consName e2 (consName e1 ?) (1 : Fin (n + 2)) = e1 :=

```

```

    consName_one e2 e1 ?
have he2 : consName e2 (consName e1 ?) 0 = e2 := consName_zero _ _
simp only [bval_implies, bval_and, bval_inWayBelowDownF, hd, hD, he1, he2]
refine congrArg (fun t =>
  inWayBelowDownB e1 (? d) (? D)  sqcap  inWayBelowDownB e2 (? d) (? D) ? t) ?_
rw [bval_ex]
refine iSup_congr fun e3 => ?_
have he3 : consName e3 (consName e2 (consName e1 ?)) 0 = e3 :=
  consName_zero _ _
have he2' : consName e3 (consName e2 (consName e1 ?))
  (1 : Fin (n + 3)) = e2 := by
  rw [consName_one]
have he1' : consName e3 (consName e2 (consName e1 ?))
  (2 : Fin (n + 3)) = e1 :=
  consName_two e3 e2 e1 ?
have hd' : consName e3 (consName e2 (consName e1 ?))
  d.succ.succ.succ = ? d := by
  rw [consName_succ, consName_succ, consName_succ]
have hD' : consName e3 (consName e2 (consName e1 ?))
  D.succ.succ.succ = ? D := by
  rw [consName_succ, consName_succ, consName_succ]
simp [bval_and, bval_inWayBelowDownF, bval_subsetF,
  he3, he2', he1', hd', hD']
ac_rfl

```

Lean 4 source (lines 401–800)

```

theorem bval_joinsDownF {n} (d D : Fin n) (? : Fin n -> AName.{u} A) :
  bval (joinsDownF d D) ? = joinsDownB (? d) (? D) := by
  unfold joinsDownF joinsDownB
  rw [bval_all]
  refine iInf_congr fun x => ?_
  have hx : consName x ? 0 = x := consName_zero _ _
  have hd : consName x ? d.succ = ? d := consName_succ x ? d
  rw [bval_iff, bval_mem, hx, hd]
  refine congrArg_2 (* sqcap *) (congrArg (fun t => memB x (? d) ? t) ?_)
    (congrArg (fun t => t ? memB x (? d)) ?_)
  all_goals
    rw [bval_ex]
    refine iSup_congr fun e => ?_
    have he : consName e (consName x ?) 0 = e := consName_zero _ _
    have hx' : consName e (consName x ?) (1 : Fin (n + 2)) = x :=
      consName_one e x ?
    have hd' : consName e (consName x ?) d.succ.succ = ? d := by
      rw [consName_succ, consName_succ]
    have hD' : consName e (consName x ?) D.succ.succ = ? D := by
      rw [consName_succ, consName_succ]
    simp [bval_and, bval_inWayBelowDownF, bval_mem, he, hx', hd', hD']

theorem bval_isContinuousAtSubsetF {n} (d D : Fin n)
  (? : Fin n -> AName.{u} A) :
  bval (isContinuousAtSubsetF d D) ? =
    isContinuousAtSubsetB (? d) (? D) := by
  unfold isContinuousAtSubsetF isContinuousAtSubsetB
  rw [bval_and, bval_directedDownF, bval_joinsDownF]

theorem bval_isContinuousLatticeSubsetF {n} (D : Fin n)
  (? : Fin n -> AName.{u} A) :
  bval (isContinuousLatticeSubsetF D) ? =
    isContinuousLatticeSubsetB (? D) := by
  unfold isContinuousLatticeSubsetF isContinuousLatticeSubsetB
  rw [bval_and, bval_isCompleteLatticeSubsetF, bval_all]
  refine congrArg (fun t => isCompleteLatticeSubsetB (? D)  sqcap  t) ?_

```

```

refine iInf_congr fun d => ?_
simp [bval_implies, bval_mem, bval_isContinuousAtSubsetF,
      consName_zero, consName_succ]

theorem isBaseSubsetB_eq (B D : AName.{u} A) :
  isBaseSubsetB B D =
    subsetB B D sqcap
    ? d : AName.{u} A,
    memB d D ? isContinuousAtSubsetB d B := by
  rfl

theorem bval_isBaseSubsetF {n} (B D : Fin n)
  (? : Fin n -> AName.{u} A) :
  bval (isBaseSubsetF B D) ? = isBaseSubsetB (? B) (? D) := by
  unfold isBaseSubsetF
  rw [bval_and, bval_subsetF, bval_all, isBaseSubsetB_eq]
  refine congrArg (fun t => subsetB (? B) (? D) sqcap t) ?_
  refine iInf_congr fun d => ?_
  simp [bval_implies, bval_mem, bval_isContinuousAtSubsetF,
        consName_zero, consName_succ]

/-!
## First content lemmas: ` << ` implies ` subseqeq `
-/

theorem nonemptyB_singleton (x : AName.{u} A) :
  nonemptyB (singletonB x) = top := by
  unfold nonemptyB
  refine top_unique (le_iSup_of_le x ?_)
  rw [memB_singletonB, eqB_self]

theorem isDirectedSubsetB_singleton (x : AName.{u} A) :
  isDirectedSubsetB (singletonB x) = top := by
  unfold isDirectedSubsetB
  rw [nonemptyB_singleton, top_inf_eq]
  refine iInf_eq_top.mpr fun u => iInf_eq_top.mpr fun v => ?_
  rw [himp_eq_top_iff, memB_singletonB, memB_singletonB]
  refine le_iSup_of_le x ?_
  rw [memB_singletonB, eqB_self, top_inf_eq]
  exact le_inf (inf_le_of_left_le (eqB_le_subsetB u x))
    (inf_le_of_right_le (eqB_le_subsetB v x))

theorem subsetUnionB_singleton (e : AName.{u} A) :
  subsetUnionB e (singletonB e) = top := by
  unfold subsetUnionB
  refine iInf_eq_top.mpr fun x => himp_eq_top_iff.mpr ?_
  refine le_iSup_of_le e ?_
  rw [memB_singletonB, eqB_self, top_inf_eq]

theorem subsetB_eqB_right (s e d : AName.{u} A) :
  subsetB d s sqcap eqB s e <= subsetB d e := by
  have hse : eqB s e <= subsetB s e := eqB_le_subsetB s e
  exact (subsetB_trans d s e).trans' (le_inf inf_le_left (inf_le_of_right_le hse))

/-- CSL S4.1: `d << e` implies `d subseqeq e` (take the directed set `{e}`). -/
theorem wayBelowSubsetB_le_subsetB (d e : AName.{u} A) :
  wayBelowSubsetB d e <= subsetB d e := by
  have hinst :=
    iInf_le (fun S : AName.{u} A =>
      isDirectedSubsetB S ?
      subsetUnionB e S ?
      bigcup s : AName.{u} A, memB s S sqcap subsetB d s) (singletonB e)
  have hdir : isDirectedSubsetB (singletonB e) = top :=

```

```

    isDirectedSubsetB_singleton e
have hun : subsetUnionB e (singletonB e) = top :=
  subsetUnionB_singleton e
have himp : (top : A) ? (top ? bigcup s, memB s (singletonB e) sqcap subsetB d s) =
  bigcup s, memB s (singletonB e) sqcap subsetB d s := by
  simp
have hle : wayBelowSubsetB d e <=
  bigcup s, memB s (singletonB e) sqcap subsetB d s := by
  unfold wayBelowSubsetB
  convert hinst using 1
  rw [hdir, hun]
  exact himp.symm
refine hle.trans (iSup_le fun s => ?_)
rw [memB_singletonB, inf_comm]
exact subsetB_eqB_right s e d

/-- The closed sentence ?` << ` implies ` subseq ?` has Boolean value `1`. -/
theorem wayBelow_le_formula_valid (? : Fin 0 -> AName.{u} A) :
  bval wayBelow_le_formula ? = top := by
  unfold wayBelow_le_formula
  refine iInf_eq_top.mpr fun d => ?_
have hd : consName d (consName e ?) (0 : Fin 2) = d := consName_zero _ _
have he : consName d (consName e ?) (1 : Fin 2) = e := consName_one d e ?
rw [bval_implies, himp_eq_top_iff, bval_wayBelowSubsetF, bval_subsetF, hd, he]
exact wayBelowSubsetB_le_subsetB d e

/-!
## Finite names and `P_fin^A`
-/

theorem memB_pfinB (S X : AName.{u} A) :
  memB S (pfinB X) = subsetB S X sqcap isFiniteB S := by
  rw [pfinB, memB_sepB S (powerB X) isFiniteB isFiniteB_congr, memB_powerB]

theorem eqB_of_memB_iff (X Y : AName.{u} A)
  (h : forall z, memB z X = memB z Y) : eqB X Y = top := by
  rw [eqB_eq_iInf]
  refine iInf_eq_top.mpr fun z => ?_
  rw [h, himp_self, inf_top_eq]

theorem memB_finsetB {n} (z : AName.{u} A) (xs : Fin n -> AName.{u} A) :
  memB z (finsetB xs) = bigcup i : Fin n, eqB z (xs i) := by
  unfold finsetB
  rw [memB_mk]
  refine le_antisymm ?le ?ge
  * refine iSup_le fun i => ?_
  rw [inf_top_eq]
  exact le_iSup (fun j : Fin n => eqB z (xs j)) i.down
  * refine iSup_le fun i => ?_
  refine le_iSup_of_le <i> ?_
  rw [inf_top_eq]

theorem isFiniteB_finsetB {n} (xs : Fin n -> AName.{u} A) :
  isFiniteB (finsetB xs) = top := by
  unfold isFiniteB
  refine top_unique (le_iSup_of_le n (le_iSup_of_le xs ?_))
  rw [eqB_self]

theorem eqB_check_empty_finsetB0 :
  eqB (check (A := A) ({ } : PSet.{u}))
    (finsetB (fun i : Fin 0 => i.elim0)) = top := by
  have hempty : ({ } : PSet.{u}) = PSet.mk PEmpty PEmpty.elim := PSet.empty_def
  refine eqB_of_memB_iff _ _ fun z => ?_

```

```

rw [memB_check_empty, memB_finsetB, iSup_of_empty]

theorem isFiniteB_empty :
  isFiniteB (check (A := A) ({ } : PSet.{u})) = top := by
  unfold isFiniteB
  refine top_unique (le_iSup_of_le (0 : Nat)
    (le_iSup_of_le (fun i : Fin 0 => i.elim0) ?_))
  exact eqB_check_empty_finsetB0.ge

theorem eqB_singletonB_finsetB1 (x : AName.{u} A) :
  eqB (singletonB x) (finsetB (fun _ : Fin 1 => x)) = top := by
  refine eqB_of_memB_iff _ _ fun z => ?_
  rw [memB_singletonB, memB_finsetB]
  refine le_antisymm ?le ?ge
  * exact le_iSup_of_le (0 : Fin 1) le_rfl
  * exact iSup_le fun _ => le_rfl

theorem isFiniteB_singleton (x : AName.{u} A) :
  isFiniteB (singletonB x) = top := by
  unfold isFiniteB
  refine top_unique (le_iSup_of_le (1 : Nat)
    (le_iSup_of_le (fun _ : Fin 1 => x) ?_))
  exact (eqB_singletonB_finsetB1 x).ge

/-- Binary union name, as the disjoint union of domains. -/
noncomputable def union2B (U V : AName.{u} A) : AName.{u} A :=
  mk (ULift.{u} (Sum U.idx V.idx))
  (fun i => match i.down with
    | .inl j => U.child j
    | .inr k => V.child k)
  (fun i => match i.down with
    | .inl j => U.val j
    | .inr k => V.val k)

theorem memB_union2B (z U V : AName.{u} A) :
  memB z (union2B U V) = memB z U sqsup memB z V := by
  unfold union2B
  rw [memB_mk, memB_eq (x := z) (y := U), memB_eq (x := z) (y := V)]
  refine le_antisymm ?le ?ge
  * refine iSup_le fun i => ?_
    cases i.down with
    | inl j =>
      exact le_sup_of_le_left (le_iSup_of_le j le_rfl)
    | inr k =>
      exact le_sup_of_le_right (le_iSup_of_le k le_rfl)
  * refine sup_le ?_ ?_
    * refine iSup_le fun j => ?_
      exact le_iSup_of_le <.inl j> le_rfl
    * refine iSup_le fun k => ?_
      exact le_iSup_of_le <.inr k> le_rfl

theorem subsetB_union2B_left (U V : AName.{u} A) :
  subsetB U (union2B U V) = top := by
  rw [subsetB_eq_iInf]
  refine iInf_eq_top.mpr fun z => himp_eq_top_iff.mpr ?_
  rw [memB_union2B]
  exact le_sup_left

theorem subsetB_union2B_right (U V : AName.{u} A) :
  subsetB V (union2B U V) = top := by
  rw [subsetB_eq_iInf]
  refine iInf_eq_top.mpr fun z => himp_eq_top_iff.mpr ?_
  rw [memB_union2B]

```

```

exact le_sup_right

theorem himp_sup_eq (a b c : A) : (a sqsup b) ? c = (a ? c) sqcap (b ? c) :=
  le_antisymm
    (le_inf (himp_le_himp_right le_sup_left) (himp_le_himp_right le_sup_right))
    (le_himp_iff.mpr (by
      have hcomm : (a ? c) sqcap (b ? c) sqcap (a sqsup b) =
        (a sqsup b) sqcap ((a ? c) sqcap (b ? c)) := inf_comm _ _
      rw [hcomm, inf_sup_right]
      refine sup_le ?_ ?_
      * have : a sqcap ((a ? c) sqcap (b ? c)) = (a ? c) sqcap (b ? c) sqcap a := by
        ac_rfl
        rw [this]
        exact (inf_le_inf_right a inf_le_left).trans himp_inf_le
      * have : b sqcap ((a ? c) sqcap (b ? c)) = (a ? c) sqcap (b ? c) sqcap b := by
        ac_rfl
        rw [this]
        exact (inf_le_inf_right b inf_le_right).trans himp_inf_le)))

theorem subsetB_union2B (U V T : AName.{u} A) :
  subsetB (union2B U V) T = subsetB U T sqcap subsetB V T := by
  rw [subsetB_eq_iInf, subsetB_eq_iInf, subsetB_eq_iInf]
  refine le_antisymm ?le ?ge
  * refine le_inf (le_iInf fun z => ?_) (le_iInf fun z => ?_)
    * have hz := iInf_le (fun z : AName.{u} A => memB z (union2B U V) ? memB z T) z
      rw [memB_union2B] at hz
      exact hz.trans (himp_le_himp_right
        (le_sup_left : memB z U <= memB z U sqsup memB z V))
    * have hz := iInf_le (fun z : AName.{u} A => memB z (union2B U V) ? memB z T) z
      rw [memB_union2B] at hz
      exact hz.trans (himp_le_himp_right
        (le_sup_right : memB z V <= memB z U sqsup memB z V))
  * refine le_iInf fun z => ?_
    have hU := iInf_le (fun z : AName.{u} A => memB z U ? memB z T) z
    have hV := iInf_le (fun z : AName.{u} A => memB z V ? memB z T) z
    rw [memB_union2B, himp_sup_eq]
    exact le_inf (inf_le_of_left_le hU) (inf_le_of_right_le hV)

theorem eqB_union2B_congr (U U' V V' : AName.{u} A) :
  eqB U U' sqcap eqB V V' <= eqB (union2B U V) (union2B U' V') := by
  rw [eqB_eq_iInf (union2B U V) (union2B U' V')]
  refine le_iInf (a := A) (? := AName.{u} A) fun z => ?_
  have hU : eqB U U' sqcap memB z U <= memB z U' := by
    rw [inf_comm]; exact memB_eqB_right U z U'
  have hV : eqB V V' sqcap memB z V <= memB z V' := by
    rw [inf_comm]; exact memB_eqB_right V z V'
  have hU' : eqB U U' sqcap memB z U' <= memB z U := by
    rw [eqB_comm (x := U) (y := U'), inf_comm]
    exact memB_eqB_right U' z U
  have hV' : eqB V V' sqcap memB z V' <= memB z V := by
    rw [eqB_comm (x := V) (y := V'), inf_comm]
    exact memB_eqB_right V' z V
  refine le_inf ?fwd ?bwd
  * rw [le_himp_iff, memB_union2B, memB_union2B]
    refine (inf_le_inf_left _ le_rfl).trans ?_
    rw [inf_sup_left]
    exact sup_le
      (le_sup_of_le_left (hU.trans' (inf_le_inf_right _ inf_le_left)))
      (le_sup_of_le_right (hV.trans' (inf_le_inf_right _ inf_le_right)))
  * rw [le_himp_iff, memB_union2B, memB_union2B]
    refine (inf_le_inf_left _ le_rfl).trans ?_
    rw [inf_sup_left]
    exact sup_le

```

```

    (le_sup_of_le_left (hU'.trans' (inf_le_inf_right _ inf_le_left)))
    (le_sup_of_le_right (hV'.trans' (inf_le_inf_right _ inf_le_right)))

theorem memB_finsetB_addCases {n m} (z : AName.{u} A)
  (xs : Fin n → AName.{u} A) (ys : Fin m → AName.{u} A) :
  memB z (finsetB (Fin.addCases (motive := fun _ => AName.{u} A) xs ys)) =
    memB z (finsetB xs) sqsup memB z (finsetB ys) := by
  rw [memB_finsetB, memB_finsetB, memB_finsetB]
  refine le_antisymm ?le ?ge
  * refine iSup_le fun i => ?_
    refine Fin.addCases (motive := fun i =>
      eqB z (Fin.addCases (motive := fun _ => AName.{u} A) xs ys i) <=
        (bigcup j : Fin n, eqB z (xs j)) sqsup bigcup k : Fin m, eqB z (ys k)) ?l ?r i
    * intro j
      rw [Fin.addCases_left]
      exact le_sup_of_le_left (le_iSup (fun j' => eqB z (xs j')) j)
    * intro k
      rw [Fin.addCases_right]
      exact le_sup_of_le_right (le_iSup (fun k' => eqB z (ys k')) k)
  * refine sup_le ?_ ?_
    * refine iSup_le fun j => ?_
      exact le_iSup_of_le (Fin.castAdd m j) (by
        rw [Fin.addCases_left])
    * refine iSup_le fun k => ?_
      exact le_iSup_of_le (Fin.natAdd n k) (by
        rw [Fin.addCases_right])

theorem eqB_union2B_finsetB {n m} (xs : Fin n → AName.{u} A)
  (ys : Fin m → AName.{u} A) :
  eqB (union2B (finsetB xs) (finsetB ys))
    (finsetB (Fin.addCases (motive := fun _ => AName.{u} A) xs ys)) = top := by
  refine eqB_of_memB_iff _ _ fun z => ?_
  rw [memB_union2B, memB_finsetB_addCases]

theorem isFiniteB_union2B (U V : AName.{u} A) :
  isFiniteB U sqcap isFiniteB V <= isFiniteB (union2B U V) := by
  unfold isFiniteB
  rw [iSup_inf_eq]
  refine iSup_le fun n => ?_
  rw [iSup_inf_eq]
  refine iSup_le fun xs => ?_
  rw [inf_iSup_eq]
  refine iSup_le fun m => ?_
  rw [inf_iSup_eq]
  refine iSup_le fun ys => ?_
  refine le_iSup_of_le (n + m)
  (le_iSup_of_le (Fin.addCases (motive := fun _ => AName.{u} A) xs ys) ?_)
  have hcongr := eqB_union2B_congr U (finsetB xs) V (finsetB ys)
  have hfin := eqB_union2B_finsetB (A := A) xs ys
  have htrans :=
    eqB_trans (union2B U V) (union2B (finsetB xs) (finsetB ys))
      (finsetB (Fin.addCases (motive := fun _ => AName.{u} A) xs ys))
  refine htrans.trans' (le_inf hcongr ?_)
  exact le_top.trans hfin.ge

theorem nonemptyB_pfinB (T : AName.{u} A) :
  nonemptyB (pfinB T) = top := by
  unfold nonemptyB
  refine top_unique (le_iSup_of_le (check (A := A) ({ } : PSet.{u}))) ?_
  rw [memB_pfinB]
  have hemp : subsetB (check (A := A) ({ } : PSet.{u})) T = top := by
    rw [subsetB_eq_iInf]
    refine iInf_eq_top.mpr fun z => himp_eq_top_iff.mpr ?_

```

```

    rw [memB_check_empty]
    exact bot_le
  rw [hemp, isFiniteB_empty, inf_top_eq]

theorem isDirectedSubsetB_pfinB (T : AName.{u} A) :
  isDirectedSubsetB (pfinB T) = top := by
  unfold isDirectedSubsetB
  rw [nonemptyB_pfinB, top_inf_eq]
  refine iInf_eq_top.mpr fun U => iInf_eq_top.mpr fun V => ?_
  rw [himp_eq_top_iff, memB_pfinB, memB_pfinB]
  refine le_iSup_of_le (union2B U V) ?_
  have hmem : subsetB U T sqcap isFiniteB U sqcap (subsetB V T sqcap isFiniteB V) <=
    memB (union2B U V) (pfinB T) := by
    rw [memB_pfinB, subsetB_union2B]
  refine le_inf ?sub ?fin
  * exact le_inf (inf_le_of_left_le inf_le_left)
    (inf_le_of_right_le inf_le_left)
  * exact (isFiniteB_union2B U V).trans'
    (le_inf (inf_le_of_left_le inf_le_right)
      (inf_le_of_right_le inf_le_right))
  refine le_inf (le_inf hmem ?_) ?_
  * exact le_top.trans (subsetB_union2B_left U V).ge
  * exact le_top.trans (subsetB_union2B_right U V).ge

theorem subsetUnionB_pfinB (T : AName.{u} A) :
  subsetUnionB T (pfinB T) = top := by
  unfold subsetUnionB
  refine iInf_eq_top.mpr fun x => himp_eq_top_iff.mpr ?_
  refine le_iSup_of_le (singletonB x) ?_
  have hmem : memB x T <= memB (singletonB x) (pfinB T) := by
    rw [memB_pfinB, subsetB_singletonB, isFiniteB_singleton, inf_top_eq]
  have hx : memB x (singletonB x) = top := by
    rw [memB_singletonB, eqB_self]
  refine le_inf hmem ?_
  exact le_top.trans hx.ge

/-- Instantiating `<<` at `P_fin^A(T)`: some finite `U` subseq `T` has `S` subseq `U`.
Not `proposition_27`: that paper name is the ground `Set X` statement. -/
theorem wayBelowSubsetB_le_exists_pfin (S T : AName.{u} A) :
  wayBelowSubsetB S T <=
    bigcup U : AName.{u} A, memB U (pfinB T) sqcap subsetB S U := by
  have hinst :=
    iInf_le (fun ? : AName.{u} A =>
      isDirectedSubsetB ? ?
      subsetUnionB T ? ?
      bigcup U : AName.{u} A, memB U ? sqcap subsetB S U) (pfinB T)
  have hdir : isDirectedSubsetB (pfinB T) = top := isDirectedSubsetB_pfinB T
  have hun : subsetUnionB T (pfinB T) = top := subsetUnionB_pfinB T
  unfold wayBelowSubsetB
  convert hinst using 1

```

Lean 4 source (lines 801–1200)

```

  rw [hdir, hun]
  simp

/-!
## Subsets of finite names are finite
-/

theorem isFiniteB_of_eqB (S T : AName.{u} A) :
  eqB S T sqcap isFiniteB T <= isFiniteB S := by
  rw [eqB_comm (x := S) (y := T)]
  exact isFiniteB_congr T S

```



```

theorem subsetB_restrictName (S X : AName.{u} A) :
  subsetB (restrictName S X) X = top :=
  subsetB_of_le_val X (fun i => X.val i sqcap memB (X.child i) S) (fun _ => inf_le_left)

theorem memB_restrictName (z S X : AName.{u} A) :
  memB z (restrictName S X) = memB z S sqcap memB z X := by
  unfold restrictName
  rw [memB_mk, memB_eq (x := z) (y := X)]
  refine le_antisymm ?le ?ge
  * refine iSup_le fun i => ?_
    have hS : eqB z (X.child i) sqcap memB (X.child i) S <= memB z S := by
      rw [eqB_comm (x := z) (y := X.child i), inf_comm]
      exact memB_eqB_left (X.child i) S z
    have hX : eqB z (X.child i) sqcap X.val i <=
      bigcup j, eqB z (X.child j) sqcap X.val j :=
      le_iSup_of_le i le_rfl
    refine le_inf ?_ ?_
    * exact hS.trans' (le_inf inf_le_left (inf_le_of_right_le inf_le_right))
    * exact hX.trans' (le_inf inf_le_left (inf_le_of_right_le inf_le_left))
  * rw [inf_iSup_eq]
    refine iSup_le fun i => ?_
    refine le_iSup_of_le i ?_
    have hS : memB z S sqcap eqB z (X.child i) <= memB (X.child i) S :=
      memB_eqB_left z S (X.child i)
    refine le_inf (inf_le_of_right_le inf_le_left) ?_
    exact le_inf (inf_le_of_right_le inf_le_right)
      (hS.trans' (le_inf inf_le_left (inf_le_of_right_le inf_le_left)))

theorem memB_union2B_restrict (z S U V : AName.{u} A) :
  memB z (union2B (restrictName S U) (restrictName S V)) =
  memB z S sqcap memB z (union2B U V) := by
  rw [memB_union2B, memB_restrictName, memB_restrictName, memB_union2B,
  inf_sup_left]

theorem himp_inf_self (a b : A) : a ? a sqcap b = a ? b := by
  refine le_antisymm ?fwd ?bwd
  * rw [le_himp_iff]
    exact (himp_inf_le (a := a) (b := a sqcap b)).trans inf_le_right
  * rw [le_himp_iff]
    exact le_inf inf_le_right himp_inf_le

theorem eqB_union2B_restrict (S U V : AName.{u} A) :
  eqB S (union2B (restrictName S U) (restrictName S V)) =
  subsetB S (union2B U V) := by
  rw [eqB_eq_iInf, subsetB_eq_iInf]
  refine iInf_congr fun z => ?_
  rw [memB_union2B_restrict]
  have hbwd : (memB z S sqcap memB z (union2B U V) ? memB z S) = top :=
    himp_eq_top_iff.mpr inf_le_left
  rw [himp_inf_self, hbwd, inf_top_eq]

theorem memB_finsetB_succ {n} (z : AName.{u} A) (xs : Fin (n + 1) -> AName.{u} A) :
  memB z (finsetB xs) =
  eqB z (xs 0) sqsup memB z (finsetB (fun i : Fin n => xs i.succ)) := by
  rw [memB_finsetB, memB_finsetB]
  refine le_antisymm ?le ?ge
  * refine iSup_le fun i => ?_
    refine Fin.cases ?_ ?_ i
    * exact le_sup_left
    * intro j
      exact le_sup_of_le_right (le_iSup (fun k : Fin n => eqB z (xs k.succ)) j)
  * refine sup_le ?_ ?_

```

```

* exact le_iSup_of_le (0 : Fin (n + 1)) le_rfl
* refine iSup_le fun j => ?_
  exact le_iSup_of_le j.succ le_rfl

theorem eqB_finsetB_cons {n} (xs : Fin (n + 1) -> AName.{u} A) :
  eqB (finsetB xs)
    (union2B (singletonB (xs 0)) (finsetB (fun i : Fin n => xs i.succ))) = top := by
  refine eqB_of_memB_iff _ _ fun z => ?_
  rw [memB_finsetB_succ, memB_union2B, memB_singletonB]

theorem subsetB_finsetB0 {n} (xs : Fin n -> AName.{u} A) (S : AName.{u} A)
  (hn : n = 0) :
  subsetB (finsetB xs) S = top := by
  subst hn
  unfold finsetB
  rw [subsetB_mk]
  exact iInf_eq_top.mpr fun i => nomatch i.down

theorem memB_finsetB0 {n} (z : AName.{u} A) (xs : Fin n -> AName.{u} A)
  (hn : n = 0) : memB z (finsetB xs) = False := by
  subst hn
  rw [memB_finsetB]
  exact iSup_of_empty _

/-- A name contained in a singleton is empty or that singleton. -/
theorem isFiniteB_of_subset_singleton (S x : AName.{u} A) :
  subsetB S (singletonB x) <= isFiniteB S := by
  have hsplit : subsetB S (singletonB x) =
    (subsetB S (singletonB x) sqcap memB x S) sqsup
    (subsetB S (singletonB x) sqcap (memB x S)?) := by
  have htop : memB x S sqsup (memB x S)? = top := sup_compl_eq_top
  calc subsetB S (singletonB x)
    = subsetB S (singletonB x) sqcap top := (inf_top_eq _).symm
    _ = subsetB S (singletonB x) sqcap (memB x S sqsup (memB x S)?) := by rw [htop]
    _ = (subsetB S (singletonB x) sqcap memB x S) sqsup
      (subsetB S (singletonB x) sqcap (memB x S)?) := inf_sup_left _ _ _
  rw [hsplit]
  refine sup_le ?yes ?no
  * have heq : subsetB S (singletonB x) sqcap memB x S = eqB S (singletonB x) := by
    rw [eqB_eq_subset, subsetB_singletonB]
    rw [heq]
    exact (isFiniteB_of_eqB S (singletonB x)).trans'
      (le_inf le_rfl (le_top.trans (isFiniteB_singleton x).ge))
  * have hempty : subsetB S (singletonB x) sqcap (memB x S)? <=
    subsetB S (finsetB (fun i : Fin 0 => i.elim0)) := by
    rw [subsetB_eq_iInf S (finsetB (fun i : Fin 0 => i.elim0))]
    refine le_iInf fun z => ?_
    rw [le_himp_iff, memB_finsetB0 z _ rfl]
    have hzx : subsetB S (singletonB x) sqcap memB z S <= eqB z x := by
      have h := memB_of_subsetB z S (singletonB x)
      rw [memB_singletonB, inf_comm] at h
      exact h
    have hx : eqB z x sqcap memB z S <= memB x S := by
      rw [inf_comm]
      exact memB_eqB_left z S x
    have hbot : subsetB S (singletonB x) sqcap (memB x S)? sqcap memB z S <= False :=
  by
  have hre :
    subsetB S (singletonB x) sqcap (memB x S)? sqcap memB z S <=
    subsetB S (singletonB x) sqcap memB z S sqcap (memB x S)? :=
  le_inf
    (le_inf (inf_le_of_left_le inf_le_left) inf_le_right)
    (inf_le_of_left_le inf_le_right)

```

```

    have hmem : subsetB S (singletonB x) sqcap memB z S sqcap (memB x S)? <= False :=
by
  have h1 : subsetB S (singletonB x) sqcap memB z S sqcap (memB x S)? <=
    eqB z x sqcap memB z S sqcap (memB x S)? :=
    inf_le_inf_right _ (le_inf hzx inf_le_right)
  have h2 : eqB z x sqcap memB z S sqcap (memB x S)? <= memB x S sqcap (memB x
S)? :=
    inf_le_inf_right _ hx
    exact h1.trans (h2.trans (le_of_eq inf_compl_eq_bot))
    exact hre.trans hmem
    exact hbot
have heq : subsetB S (finsetB (fun i : Fin 0 => i.elim0)) <=
  eqB S (finsetB (fun i : Fin 0 => i.elim0)) := by
  rw [eqB_eq_subset, subsetB_finsetB0 (fun i : Fin 0 => i.elim0) S rfl,
    inf_top_eq]
  refine (empty.trans heq).trans ?_
  exact (isFiniteB_of_eqB S (finsetB (fun i : Fin 0 => i.elim0))).trans'
    (le_inf le_rfl (le_top.trans (isFiniteB_finsetB _).ge))

/-- A name contained in a finite enumeration is finite. -/
theorem isFiniteB_of_subset_finsetB {n} (S : AName.{u} A)
  (xs : Fin n -> AName.{u} A) :
  subsetB S (finsetB xs) <= isFiniteB S := by
induction n generalizing S with
| zero =>
  have hempty : subsetB (finsetB xs) S = top := subsetB_finsetB0 xs S rfl
  have heq : subsetB S (finsetB xs) <= eqB S (finsetB xs) := by
    rw [eqB_eq_subset, hempty, inf_top_eq]
  exact heq.trans ((isFiniteB_of_eqB S (finsetB xs)).trans'
    (le_inf le_rfl (le_top.trans (isFiniteB_finsetB xs).ge)))
| succ n ih =>
  have hcons : eqB (finsetB xs)
    (union2B (singletonB (xs 0))
      (finsetB (fun i : Fin n => xs i.succ))) = top :=
    eqB_finsetB_cons xs
  have hsub : subsetB S (finsetB xs) <=
    subsetB S (union2B (singletonB (xs 0))
      (finsetB (fun i : Fin n => xs i.succ))) := by
  have hle : subsetB (finsetB xs)
    (union2B (singletonB (xs 0))
      (finsetB (fun i : Fin n => xs i.succ))) = top :=
    top_unique (hcons.ge.trans (eqB_le_subsetB _ _))
  have htr := subsetB_trans S (finsetB xs)
    (union2B (singletonB (xs 0))
      (finsetB (fun i : Fin n => xs i.succ)))
  rw [hle, inf_top_eq] at htr
  exact htr
  refine hsub.trans ?_
  set head := xs 0
  set rest := fun i : Fin n => xs i.succ
  set S0 := restrictName S (singletonB head)
  set S1 := restrictName S (finsetB rest)
  have hS0 : isFiniteB S0 = top :=
    top_unique ((subsetB_restrictName S (singletonB head)).ge.trans
      (isFiniteB_of_subset_singleton S0 head))
  have hS1 : isFiniteB S1 = top :=
    top_unique ((subsetB_restrictName S (finsetB rest)).ge.trans (ih S1 rest))
  have hU : isFiniteB (union2B S0 S1) = top :=
    top_unique ((le_inf hS0.ge hS1.ge).trans (isFiniteB_union2B S0 S1))
  have heq : subsetB S (union2B (singletonB head) (finsetB rest)) <=
    eqB S (union2B S0 S1) := (eqB_union2B_restrict S (singletonB head)
      (finsetB rest)).ge
  exact heq.trans ((isFiniteB_of_eqB S (union2B S0 S1)).trans'

```

```

      (le_inf le_rfl (le_top.trans hU.ge)))

/-- A subsequence of a finite name is finite. -/
theorem isFiniteB_of_subset (S U : AName.{u} A) :
  subsetB S U sqcap isFiniteB U <= isFiniteB S := by
  unfold isFiniteB
  rw [inf_iSup_eq]
  refine iSup_le fun n => ?_
  rw [inf_iSup_eq]
  refine iSup_le fun xs => ?_
  have hsub : subsetB S U sqcap eqB U (finsetB xs) <= subsetB S (finsetB xs) := by
    have htr := subsetB_trans S U (finsetB xs)
    exact htr.trans' (le_inf inf_le_left
      (inf_le_of_right_le (eqB_le_subsetB U (finsetB xs))))
  exact hsub.trans (isFiniteB_of_subset_finsetB S xs)

/-- `<<` implies finite and `subsequence`. Not `proposition_27`. -/
theorem wayBelowSubsetB_le_finite_subset (S T : AName.{u} A) :
  wayBelowSubsetB S T <= isFiniteB S sqcap subsetB S T := by
  refine le_inf ?fin ?sub
  * refine (wayBelowSubsetB_le_exists_pfin S T).trans (iSup_le fun U => ?_)
  rw [memB_pfinB]
  exact (isFiniteB_of_subset S U).trans'
    (le_inf inf_le_right (inf_le_of_left_le inf_le_right))
  * exact wayBelowSubsetB_le_subsetB S T

/-!
## Converse: finite `subsequence` implies `<<`
-/

theorem subsetB_eqB_congr_left {X Y Z : AName.{u} A} (h : eqB X Y = top) :
  subsetB X Z = subsetB Y Z := by
  refine le_antisymm ?_ ?_
  * have := subsetB_of_eqB X Y Z
  rw [h, top_inf_eq] at this
  exact this
  * have := subsetB_of_eqB Y X Z
  rw [eqB_comm (x := Y) (y := X), h, top_inf_eq] at this
  exact this

theorem subsetUnionB_apply (T ? x : AName.{u} A) :
  memB x T sqcap subsetUnionB T ? <= bigcup y, memB y ? sqcap memB x y := by
  unfold subsetUnionB
  have h :=
    iInf_le (fun x' : AName.{u} A =>
      memB x' T ? bigcup y, memB y ? sqcap memB x' y) x
  refine (le_himp_iff.mp h).trans' ?_
  rw [inf_comm]

theorem isDirectedSubsetB_apply (? u v : AName.{u} A) :
  isDirectedSubsetB ? sqcap memB u ? sqcap memB v ? <=
    bigcup w, memB w ? sqcap subsetB u w sqcap subsetB v w := by
  unfold isDirectedSubsetB
  have hp :=
    iInf_le (fun u' : AName.{u} A =>
      ? v' : AName.{u} A,
      memB u' ? sqcap memB v' ? ?
      bigcup w, memB w ? sqcap subsetB u' w sqcap subsetB v' w) u
  have hp' :=
    iInf_le (fun v' : AName.{u} A =>
      memB u ? sqcap memB v' ? ?
      bigcup w, memB w ? sqcap subsetB u w sqcap subsetB v' w) v
  have hle := hp.trans hp'

```

```

have hpair : (? u' : AName.{u} A, ? v' : AName.{u} A,
  memB u' ? sqcap memB v' ? ?
    bigcup w, memB w ? sqcap subsetB u' w sqcap subsetB v' w) sqcap
  memB u ? sqcap memB v ? <=
    bigcup w, memB w ? sqcap subsetB u w sqcap subsetB v w := by
have h := le_himp_iff.mp hle
refine h.trans' ?_
exact le_inf (inf_le_of_left_le inf_le_left)
  (le_inf (inf_le_of_left_le inf_le_right) inf_le_right)
refine hpair.trans' ?_
exact inf_le_inf_right _ (inf_le_inf_right _ inf_le_right)

theorem iSup_inf_iSup_eq {? ? : Type*} (f : ? -> A) (g : ? -> A) :
  (bigcup i, f i) sqcap bigcup j, g j = bigcup i, bigcup j, f i sqcap g j := by
refine le_antisymm ?le ?ge
* have h : (bigcup i, f i) sqcap bigcup j, g j = bigcup j, (bigcup i, f i) sqcap
  g j :=
  inf_iSup_eq _ _
rw [h]
refine iSup_le fun j => ?_
have h' : (bigcup i, f i) sqcap g j = bigcup i, f i sqcap g j := by
  rw [inf_comm, inf_iSup_eq]
  exact iSup_congr fun i => inf_comm (a := g j) (b := f i)
rw [h']
refine iSup_le fun i => le_iSup_of_le i (le_iSup_of_le j le_rfl)
* refine iSup_le fun i => iSup_le fun j =>
  le_inf (le_iSup_of_le i inf_le_left) (le_iSup_of_le j inf_le_right)

/-- A finite enumeration contained in `T` subseteq `?` for directed `?` sits
inside some member of `?`. -/
theorem finsetB_le_exists_directed {n} (xs : Fin n -> AName.{u} A)
  (T ? : AName.{u} A) :
  subsetB (finsetB xs) T sqcap isDirectedSubsetB ? sqcap subsetUnionB T ? <=
    bigcup U, memB U ? sqcap subsetB (finsetB xs) U := by
induction n generalizing T ? with
| zero =>
  have hempty (U : AName.{u} A) : subsetB (finsetB xs) U = top :=
    subsetB_finsetB0 xs U rfl
  have hne : nonemptyB ? <=
    bigcup U, memB U ? sqcap subsetB (finsetB xs) U := by
    unfold nonemptyB
    refine iSup_mono fun U => ?_
    rw [hempty, inf_top_eq]
  refine hne.trans' ?_
  unfold isDirectedSubsetB
  exact inf_le_of_left_le (inf_le_of_right_le inf_le_left)
| succ n ih =>
  have hcons : eqB (finsetB xs)
    (union2B (singletonB (xs 0))
      (finsetB (fun i : Fin n => xs i.succ))) = top :=
    eqB_finsetB_cons xs
  set head := xs 0
  set rest := fun i : Fin n => xs i.succ
  have hsubT : subsetB (finsetB xs) T =
    memB head T sqcap subsetB (finsetB rest) T := by
  have h1 : subsetB (finsetB xs) T =
    subsetB (union2B (singletonB head) (finsetB rest)) T :=
    subsetB_eqB_congr_left hcons
  rw [h1, subsetB_union2B, subsetB_singletonB]
  rw [hsubT]
  set G :=
    memB head T sqcap subsetB (finsetB rest) T sqcap isDirectedSubsetB ? sqcap
    subsetUnionB T ?

```

```

have hto_rest : G <= subsetB (finsetB rest) T sqcap isDirectedSubsetB ? sqcap
  subsetUnionB T ? :=
  le_inf (le_inf (inf_le_of_left_le (inf_le_of_left_le inf_le_right))
    (inf_le_of_left_le inf_le_right))
    inf_le_right
have hto_head : G <= memB head T sqcap subsetUnionB T ? :=
  le_inf (inf_le_of_left_le (inf_le_of_left_le inf_le_left)) inf_le_right
have hto_dir : G <= isDirectedSubsetB ? :=
  inf_le_of_left_le inf_le_right
have hrest := (ih rest T ?).trans' hto_rest
have hhead := (subsetUnionB_apply T ? head).trans' hto_head
have hcomb : G <=
  (bigcup U1, memB U1 ? sqcap subsetB (finsetB rest) U1) sqcap
  (bigcup U2, memB U2 ? sqcap memB head U2) sqcap isDirectedSubsetB ? :=
  le_inf (le_inf hrest hhead) hto_dir
refine hcomb.trans ?_
rw [iSup_inf_iSup_eq]
rw [iSup_inf_eq]
refine iSup_le fun U1 => ?_
rw [iSup_inf_eq]
refine iSup_le fun U2 => ?_
have hdir := isDirectedSubsetB_apply ? U1 U2
have hto_uv :
  (memB U1 ? sqcap subsetB (finsetB rest) U1) sqcap
  (memB U2 ? sqcap memB head U2) sqcap isDirectedSubsetB ? <=
  isDirectedSubsetB ? sqcap memB U1 ? sqcap memB U2 ? :=
  le_inf
  (le_inf inf_le_right (inf_le_of_left_le (inf_le_of_left_le inf_le_left)))
  (inf_le_of_left_le (inf_le_of_right_le inf_le_left))
have hW := hdir.trans' hto_uv
have hkeep_rest :
  (memB U1 ? sqcap subsetB (finsetB rest) U1) sqcap
  (memB U2 ? sqcap memB head U2) sqcap isDirectedSubsetB ? <=
  subsetB (finsetB rest) U1 :=
  inf_le_of_left_le (inf_le_of_left_le inf_le_right)
have hkeep_head :
  (memB U1 ? sqcap subsetB (finsetB rest) U1) sqcap
  (memB U2 ? sqcap memB head U2) sqcap isDirectedSubsetB ? <=
  memB head U2 :=
  inf_le_of_left_le (inf_le_of_right_le inf_le_right)
have hjoin :
  (memB U1 ? sqcap subsetB (finsetB rest) U1) sqcap
  (memB U2 ? sqcap memB head U2) sqcap isDirectedSubsetB ? <=
  (bigcup W, memB W ? sqcap subsetB U1 W sqcap subsetB U2 W) sqcap
  (subsetB (finsetB rest) U1 sqcap memB head U2) :=
  le_inf hW (le_inf hkeep_rest hkeep_head)
refine hjoin.trans ?_
rw [iSup_inf_eq (f := fun W : AName.{u} A =>
  memB W ? sqcap subsetB U1 W sqcap subsetB U2 W)]
refine iSup_le fun W => ?_
have hrestW : subsetB (finsetB rest) U1 sqcap subsetB U1 W <=
  subsetB (finsetB rest) W :=
  (subsetB_trans (finsetB rest) U1 W).trans'
  (le_inf inf_le_left inf_le_right)
have hheadW : memB head U2 sqcap subsetB U2 W <= memB head W :=
  memB_of_subsetB head U2 W
have hsubW :
  (memB W ? sqcap subsetB U1 W sqcap subsetB U2 W) sqcap
  (subsetB (finsetB rest) U1 sqcap memB head U2) <=
  memB W ? sqcap subsetB (finsetB xs) W := by
have hfin : subsetB (union2B (singletonB head) (finsetB rest)) W =
  subsetB (finsetB xs) W := (subsetB_eqB_congr_left hcons).symm
have hun : subsetB (union2B (singletonB head) (finsetB rest)) W =

```

```

    memB head W sqcap subsetB (finsetB rest) W := by
    rw [subsetB_union2B, subsetB_singletonB]
    refine le_inf (inf_le_of_left_le (inf_le_of_left_le inf_le_left)) ?_
    rw [ <- hfin, hun]
    refine le_inf ?_ ?_
    * exact hheadW.trans'
      (le_inf (inf_le_of_right_le inf_le_right)
        (inf_le_of_left_le inf_le_right))
    * exact hrestW.trans'
      (le_inf (inf_le_of_right_le inf_le_left)
        (inf_le_of_left_le (inf_le_of_left_le inf_le_right)))
    exact le_iSup_of_le W hsubW

/-- Finite `subsq` implies `<`. Not `proposition_27`. -/
theorem wayBelowSubsetB_of_finite_subset (S T : AName.{u} A) :

```

Lean 4 source (lines 1201–1600)

```

    isFiniteB S sqcap subsetB S T <= wayBelowSubsetB S T := by
    unfold wayBelowSubsetB
    refine le_iInf fun ? => ?_
    rw [le_himp_iff, le_himp_iff]
    have hre : isFiniteB S sqcap subsetB S T sqcap isDirectedSubsetB ? sqcap
      subsetUnionB T ? <=
      isFiniteB S sqcap (subsetB S T sqcap isDirectedSubsetB ? sqcap subsetUnionB T ?) :=
    le_inf (inf_le_of_left_le (inf_le_of_left_le inf_le_left))
      (le_inf (le_inf
        (inf_le_of_left_le (inf_le_of_left_le inf_le_right))
        (inf_le_of_left_le inf_le_right))
        inf_le_right)
    refine hre.trans ?_
    unfold isFiniteB
    rw [iSup_inf_eq (f := fun n : Nat =>
      bigcup xs : Fin n -> AName.{u} A, eqB S (finsetB xs))]
    refine iSup_le fun n => ?_
    rw [iSup_inf_eq (f := fun xs : Fin n -> AName.{u} A => eqB S (finsetB xs))]
    refine iSup_le fun xs => ?_
    have hto : eqB S (finsetB xs) sqcap (subsetB S T sqcap isDirectedSubsetB ? sqcap
      subsetUnionB T ?) <=
      eqB S (finsetB xs) sqcap (subsetB (finsetB xs) T sqcap isDirectedSubsetB ? sqcap
        subsetUnionB T ?) := by
    refine le_inf inf_le_left (le_inf (le_inf ?sub ?dir) ?un)
    * exact (subsetB_of_eqB S (finsetB xs) T).trans'
      (le_inf inf_le_left
        (inf_le_of_right_le (inf_le_of_left_le inf_le_left)))
    * exact inf_le_of_right_le (inf_le_of_left_le inf_le_right)
    * exact inf_le_of_right_le inf_le_right
    refine hto.trans ?_
    refine (inf_le_inf_left (eqB S (finsetB xs))
      (finsetB_le_exists_directed xs T ?)).trans ?_
    rw [inf_iSup_eq]
    refine iSup_le fun U => ?_
    refine le_iSup_of_le U ?_
    refine le_inf (inf_le_of_right_le inf_le_left) ?_
    have h := subsetB_of_eqB (finsetB xs) S U
    refine h.trans' ?_
    refine le_inf ?_ (inf_le_of_right_le inf_le_right)
    rw [eqB_comm]
    exact inf_le_left

/-- Internal subset-order `<` is finite `subsq`. Not `proposition_27`. -/
theorem wayBelowSubsetB_eq_finite_subset (S T : AName.{u} A) :
  wayBelowSubsetB S T = isFiniteB S sqcap subsetB S T :=
  le_antisymm (wayBelowSubsetB_le_finite_subset S T)

```

```

    (wayBelowSubsetB_of_finite_subset S T)

/-!
## Tight union and subseq -sup in  $P^A(X)$ 

Fat `unionB` sets every child's membership degree to `top`, so it has only
the one-sided law `memB_unionB_of_mem`. The tight union `sUnionB` (Jech
mix of the children by their own values) satisfies
 $\forall v \text{ in } S? = \text{bigcup } u, \forall u \text{ in } S? \text{ sqcap } \forall v \text{ in } u?$ , and is the subseq -supremum of `
S`.
When `S` subseq  $P^A(X)$ , that sup lies in  $P^A(X)$ .
-/

/-- Semantic union membership:  $\exists u (u \text{ in } X \wedge v \text{ in } u)$ . -/
noncomputable def existsMemB (v X : AName.{u} A) : A :=
  bigcup u : AName.{u} A, memB u X sqcap memB v u

/-- Tight union name: domain is the disjoint union of the children's
domains, with Boolean values  $X(i) \text{ sqcap } X.\text{child}(i)(j)$ . This is `mix` of
the children; it is not fat `unionB`. -/
noncomputable def sUnionB (X : AName.{u} A) : AName.{u} A :=
  mix X.val X.child

theorem existsMemB_eq_iSup_child (X v : AName.{u} A) :
  existsMemB v X = bigcup i : X.idx, X.val i sqcap memB v (X.child i) := by
  unfold existsMemB
  refine le_antisymm ?le ?ge
  * refine iSup_le fun u => ?_
    rw [memB_eq (x := u) (y := X), iSup_inf_eq]
    refine iSup_le fun i => ?_
    have h : eqB u (X.child i) sqcap memB v u <= memB v (X.child i) := by
      rw [inf_comm]; exact memB_eqB_right u v (X.child i)
    refine le_iSup_of_le i ?_
    exact le_inf (inf_le_of_left_le inf_le_right)
      (h.trans' (le_inf (inf_le_of_left_le inf_le_left) inf_le_right))
  * refine iSup_le fun i => ?_
    refine le_iSup_of_le (X.child i) ?_
    exact inf_le_inf_right _ (val_le_memB X i)

theorem existsMemB_le_memB_unionB (X v : AName.{u} A) :
  existsMemB v X <= memB v (unionB X) := by
  unfold existsMemB
  refine iSup_le fun u => memB_unionB_of_mem X u v

theorem memB_sUnionB (v X : AName.{u} A) :
  memB v (sUnionB X) = existsMemB v X := by
  unfold sUnionB
  rw [memB_eq, existsMemB_eq_iSup_child]
  refine le_antisymm ?le ?ge
  * refine iSup_le fun p => ?_
    rcases p with <i, j>
    refine le_iSup_of_le i ?_
    have hmem : eqB v ((X.child i).child j) sqcap (X.child i).val j <=
      memB v (X.child i) := by
      rw [memB_eq]
      exact le_iSup_of_le j le_refl
    refine le_inf (inf_le_of_right_le inf_le_left) ?_
    exact hmem.trans' (le_inf inf_le_left (inf_le_of_right_le inf_le_right))
  * refine iSup_le fun i => ?_
    rw [memB_eq (x := v) (y := X.child i), inf_iSup_eq]
    refine iSup_le fun j => ?_
    refine le_iSup_of_le (<i, j> : Sigma k : X.idx, (X.child k).idx) ?_
    refine le_inf (inf_le_of_right_le inf_le_left) ?_

```



```

    exact le_inf inf_le_left (inf_le_of_right_le inf_le_right)

theorem subsetB_sUnionB_eq_subsetUnionB (e S : AName.{u} A) :
  subsetB e (sUnionB S) = subsetUnionB e S := by
  rw [subsetB_eq_iInf]
  unfold subsetUnionB
  refine iInf_congr fun x => ?_
  rw [memB_sUnionB]
  rfl

theorem isUpperBoundSubsetB_apply (x S y : AName.{u} A) :
  isUpperBoundSubsetB x S sqcap memB y S <= subsetB y x :=
  le_himp_iff.mp (iInf_le (fun y' : AName.{u} A =>
    memB y' S ? subsetB y' x) y)

theorem isUpperBoundSubsetB_sUnionB (S : AName.{u} A) :
  isUpperBoundSubsetB (sUnionB S) S = top := by
  unfold isUpperBoundSubsetB
  refine iInf_eq_top.mpr fun u => himp_eq_top_iff.mpr ?_
  rw [subsetB_eq_iInf]
  refine le_iInf fun v => ?_
  rw [le_himp_iff, memB_sUnionB]
  exact le_iSup_of_le u le_rfl

theorem subsetB_sUnionB_of_upperBound (S Y : AName.{u} A) :
  isUpperBoundSubsetB Y S <= subsetB (sUnionB S) Y := by
  rw [subsetB_eq_iInf]
  refine le_iInf fun v => ?_
  rw [le_himp_iff, memB_sUnionB]
  unfold existsMemB
  rw [inf_iSup_eq]
  refine iSup_le fun u => ?_
  have hsub : isUpperBoundSubsetB Y S sqcap memB u S <= subsetB u Y :=
    isUpperBoundSubsetB_apply Y S u
  have hmem : memB v u sqcap subsetB u Y <= memB v Y :=
    memB_of_subsetB v u Y
  refine hmem.trans' (le_inf ?_ ?_)
  * exact inf_le_of_right_le inf_le_right
  * exact hsub.trans' (le_inf inf_le_left (inf_le_of_right_le inf_le_left))

/-- Tight union is the subteq -supremum of its members. Fat `unionB` is not
claimed to be least: it can add extra membership. -/
theorem isSupSubsetB_sUnionB (S : AName.{u} A) :
  isSupSubsetB (sUnionB S) S = top := by
  unfold isSupSubsetB
  rw [isUpperBoundSubsetB_sUnionB, top_inf_eq]
  refine iInf_eq_top.mpr fun Y => himp_eq_top_iff.mpr ?_
  exact subsetB_sUnionB_of_upperBound S Y

theorem subsetB_sUnionB_of_mem_powerB (S X : AName.{u} A) :
  subsetB S (powerB X) <= subsetB (sUnionB S) X := by
  rw [subsetB_eq_iInf (sUnionB S) X]
  refine le_iInf fun v => ?_
  rw [le_himp_iff, memB_sUnionB]
  unfold existsMemB
  rw [inf_iSup_eq]
  refine iSup_le fun u => ?_
  refine (memB_of_subsetB v u X).trans' (le_inf ?v ?sub)
  * exact inf_le_of_right_le inf_le_right
  * have hpow : memB u S sqcap subsetB S (powerB X) <= subsetB u X := by
    rw [← memB_powerB u X]
    exact memB_of_subsetB u S (powerB X)
  exact hpow.trans' (le_inf (inf_le_of_right_le inf_le_left) inf_le_left)

```

```

theorem memB_sUnionB_powerB (S X : AName.{u} A) :
  subsetB S (powerB X) <= memB (sUnionB S) (powerB X) := by
  rw [memB_powerB]
  exact subsetB_sUnionB_of_mem_powerB S X

/-- `P^A(X)` is a complete lattice under `subseq` : the subseq -sup of `S` subseq `P^A(X)`
is the tight union `sUnionB S`, which lies in `P^A(X)`. -/
theorem isCompleteLatticeSubsetB_powerB (X : AName.{u} A) :
  isCompleteLatticeSubsetB (powerB X) = top := by
  unfold isCompleteLatticeSubsetB
  refine iInf_eq_top.mpr fun S => himp_eq_top_iff.mpr ?_
  refine le_iSup_of_le (sUnionB S) ?_
  exact le_inf (memB_sUnionB_powerB S X)
    (le_top.trans (isSupSubsetB_sUnionB S).ge)

/-!
## Continuity of `P^A(X)` at each `d`

`e << d` is finite `subseq` (`wayBelowSubsetB_eq_finite_subset`), so
`{e in P^A(X) | e << d}` agrees with `P_fin^A(d)` once `d` subseq `X`
(`inWayBelowDownB_eq_memB_pfinB`) and with `{e in P_fin^A(X) | e << d}`
unconditionally. Directedness is binary union; joins-down uses
`T` subseq `P_fin^A(T)` and that every finite subset of `T` is `subseq T`.
-/

theorem subsetB_check_empty (T : AName.{u} A) :
  subsetB (check (A := A) ({ } : PSet.{u})) T = top := by
  rw [subsetB_eq_iInf]
  refine iInf_eq_top.mpr fun z => himp_eq_top_iff.mpr ?_
  rw [memB_check_empty]
  exact bot_le

theorem inWayBelowDownB_powerB (e d X : AName.{u} A) :
  inWayBelowDownB e d (powerB X) =
  memB e (powerB X) sqcap isFiniteB e sqcap subsetB e d := by
  unfold inWayBelowDownB
  rw [wayBelowSubsetB_eq_finite_subset]
  ac_rfl

theorem inWayBelowDownB_le_memB_pfinB (e d X : AName.{u} A) :
  inWayBelowDownB e d (powerB X) <= memB e (pfinB d) := by
  rw [inWayBelowDownB_powerB, memB_pfinB]
  exact le_inf inf_le_right (inf_le_of_left_le inf_le_right)

theorem memB_pfinB_le_inWayBelowDownB (e d X : AName.{u} A) :
  memB e (pfinB d) sqcap subsetB d X <= inWayBelowDownB e d (powerB X) := by
  rw [inWayBelowDownB_powerB, memB_pfinB, memB_powerB]
  refine le_inf (le_inf ?subX ?fin) ?subd
  * exact (subsetB_trans e d X).trans'
    (le_inf (inf_le_of_left_le inf_le_left) inf_le_right)
  * exact inf_le_of_left_le inf_le_right
  * exact inf_le_of_left_le inf_le_left

/-- `{e in P^A(X) | e << d}` agrees with `P_fin^A(d)` at `d` subseq `X`. -/
theorem inWayBelowDownB_eq_memB_pfinB (e d X : AName.{u} A) :
  inWayBelowDownB e d (powerB X) sqcap subsetB d X =
  memB e (pfinB d) sqcap subsetB d X :=
  le_antisymm
    (inf_le_inf_right _ (inWayBelowDownB_le_memB_pfinB e d X))
    (le_inf (memB_pfinB_le_inWayBelowDownB e d X) inf_le_right)

```

```

/-- `{e in P^A(X) | e << d}` is `{e in P_fin^A(X) | e << d}`. -/
theorem inWayBelowDownB_eq_memB_pfinB_wayBelow (e d X : AName.{u} A) :
  inWayBelowDownB e d (powerB X) =
    memB e (pfinB X) sqcap wayBelowSubsetB e d := by
  rw [inWayBelowDownB_powerB, memB_pfinB, wayBelowSubsetB_eq_finite_subset,
    memB_powerB]
  ac_rfl

/-- `d I P_fin^A(X)` agrees with `P_fin^A(d)` at `d subseq X`. -/
theorem memB_pfinB_inf_wayBelow_eq_memB_pfinB (e d X : AName.{u} A) :
  memB e (pfinB X) sqcap wayBelowSubsetB e d sqcap subsetB d X =
    memB e (pfinB d) sqcap subsetB d X := by
  rw [← inWayBelowDownB_eq_memB_pfinB_wayBelow, inWayBelowDownB_eq_memB_pfinB]

theorem nonempty_inWayBelowDownB_powerB (d X : AName.{u} A) :
  (bigcup e : AName.{u} A, inWayBelowDownB e d (powerB X)) = top := by
  refine top_unique (le_iSup_of_le (check (A := A) ({ } : PSet.{u})) ?_)
  rw [inWayBelowDownB_powerB, memB_powerB, isFiniteB_empty,
    subsetB_check_empty, subsetB_check_empty, inf_top_eq, inf_top_eq]

theorem directedDownB_powerB (d X : AName.{u} A) :
  directedDownB d (powerB X) = top := by
  unfold directedDownB
  rw [nonempty_inWayBelowDownB_powerB, top_inf_eq]
  refine iInf_eq_top.mpr fun e1 => iInf_eq_top.mpr fun e2 => ?_
  rw [himp_eq_top_iff]
  refine le_iSup_of_le (union2B e1 e2) ?_
  have hle1 : subsetB e1 (union2B e1 e2) = top := subsetB_union2B_left e1 e2
  have hle2 : subsetB e2 (union2B e1 e2) = top := subsetB_union2B_right e1 e2
  refine le_inf (le_inf ?in3 (le_top.trans hle1.ge)) (le_top.trans hle2.ge)
  rw [inWayBelowDownB_powerB e1 d X, inWayBelowDownB_powerB e2 d X,
    inWayBelowDownB_powerB (union2B e1 e2) d X, memB_powerB, memB_powerB,
    memB_powerB, subsetB_union2B, subsetB_union2B]
  refine le_inf (le_inf ?subX ?fin) ?subd
  * exact le_inf
    (inf_le_of_left_le (inf_le_of_left_le inf_le_left))
    (inf_le_of_right_le (inf_le_of_left_le inf_le_left))
  * exact (isFiniteB_union2B e1 e2).trans'
    (le_inf (inf_le_of_left_le (inf_le_of_left_le inf_le_right))
      (inf_le_of_right_le (inf_le_of_left_le inf_le_right)))
  * exact le_inf (inf_le_of_left_le inf_le_right)
    (inf_le_of_right_le inf_le_right)

theorem isUpperBoundSubsetB_pfinB (T : AName.{u} A) :
  isUpperBoundSubsetB T (pfinB T) = top := by
  unfold isUpperBoundSubsetB
  refine iInf_eq_top.mpr fun U => himp_eq_top_iff.mpr ?_
  rw [memB_pfinB]
  exact inf_le_left

theorem subsetB_sUnionB_pfinB (T : AName.{u} A) :
  subsetB (sUnionB (pfinB T)) T = top :=
  top_unique ((isUpperBoundSubsetB_pfinB T).ge.trans
    (subsetB_sUnionB_of_upperBound (pfinB T) T))

theorem joinsDownB_powerB (d X : AName.{u} A) :
  memB d (powerB X) <= joinsDownB d (powerB X) := by
  unfold joinsDownB
  refine le_iInf fun x => le_inf ?fwd ?bwd
  * rw [le_himp_iff]
  refine le_iSup_of_le (singletonB x) ?_
  rw [memB_powerB d X, inWayBelowDownB_powerB (singletonB x) d X,
    memB_powerB (singletonB x) X, subsetB_singletonB x X,

```

```

    isFiniteB_singleton x, inf_top_eq, subsetB_singletonB x d,
    memB_singletonB x x, eqB_self, inf_top_eq]
  refine le_inf ?memX inf_le_right
  exact (memB_of_subsetB x d X).trans' (le_inf inf_le_right inf_le_left)
* rw [le_himp_iff]
  refine inf_le_of_right_le ?_
  refine iSup_le fun e => ?_
  have hsub : inWayBelowDownB e d (powerB X) <= subsetB e d := by
    rw [inWayBelowDownB_powerB]
    exact inf_le_right
  exact (memB_of_subsetB x e d).trans' (le_inf inf_le_right
    (hsub.trans' inf_le_left))

theorem isContinuousAtSubsetB_powerB (d X : AName.{u} A) :
  memB d (powerB X) <= isContinuousAtSubsetB d (powerB X) := by
  unfold isContinuousAtSubsetB
  exact le_inf (le_top.trans (directedDownB_powerB d X).ge)
    (joinsDownB_powerB d X)

/-- `P^A(X)` is an internal continuous lattice under `subseq`. Not
`proposition_27` / `proposition_28` (those names are the ground `Set X`
statements) and not `corollary_34` (that paper type still needs numerals
as one internal statement; numerals remain `corollary_34_check`). -/
theorem isContinuousLatticeSubsetB_powerB (X : AName.{u} A) :
  isContinuousLatticeSubsetB (powerB X) = top := by
  unfold isContinuousLatticeSubsetB
  rw [isCompleteLatticeSubsetB_powerB, top_inf_eq]
  refine iInf_eq_top.mpr fun d => himp_eq_top_iff.mpr ?_
  exact isContinuousAtSubsetB_powerB d X

/-!
## Base: `P_fin^A(X)` for `P^A(X)`

`d I P_fin^A(X)` is directed and `d = ?(d I P_fin^A(X))` by the
agreement with `{e in P^A(X) | e << d}`. Not `proposition_28`.
-/

theorem subsetB_pfinB_powerB (X : AName.{u} A) :
  subsetB (pfinB X) (powerB X) = top := by
  rw [subsetB_eq_iInf]
  refine iInf_eq_top.mpr fun z => himp_eq_top_iff.mpr ?_
  rw [memB_pfinB, memB_powerB]
  exact inf_le_left

/-- `d I P_fin^A(X)` is directed. -/
theorem directedDownB_pfinB_inter (d X : AName.{u} A) :
  (bigcup e : AName.{u} A, memB e (pfinB X) sqcap wayBelowSubsetB e d) sqcap
  ? e1 : AName.{u} A, ? e2 : AName.{u} A,
  memB e1 (pfinB X) sqcap wayBelowSubsetB e1 d sqcap
  (memB e2 (pfinB X) sqcap wayBelowSubsetB e2 d) ?
  bigcup e3 : AName.{u} A,
  memB e3 (pfinB X) sqcap wayBelowSubsetB e3 d sqcap
  subsetB e1 e3 sqcap subsetB e2 e3 = top := by
  refine Eq.trans ?eq (directedDownB_powerB d X)
  unfold directedDownB
  refine congrArg_2 (* sqcap *) ?ne ?dir
  * exact iSup_congr fun e =>
    (inWayBelowDownB_eq_memB_pfinB_wayBelow e d X).symm
  * refine iInf_congr fun e1 => iInf_congr fun e2 => ?_
  rw [inWayBelowDownB_eq_memB_pfinB_wayBelow e1 d X,
    inWayBelowDownB_eq_memB_pfinB_wayBelow e2 d X]
  refine congrArg
    (fun t =>

```

```

      memB e1 (pfinB X) sqcap wayBelowSubsetB e1 d sqcap
      (memB e2 (pfinB X) sqcap wayBelowSubsetB e2 d) ? t) ?_
exact iSup_congr fun e3 => by
  rw [inWayBelowDownB_eq_memB_pfinB_wayBelow e3 d X]

/-- `d = ?(d I P_fin^A(X))` once `d subseq X`. -/
theorem joinsDownB_pfinB_inter (d X : AName.{u} A) :
  memB d (powerB X) <=
    ? x : AName.{u} A,
    (memB x d ?
      bigcup e : AName.{u} A,
      memB e (pfinB X) sqcap wayBelowSubsetB e d sqcap memB x e) sqcap
    (( bigcup e : AName.{u} A,
      memB e (pfinB X) sqcap wayBelowSubsetB e d sqcap memB x e) ?
      memB x d) := by
  refine (joinsDownB_powerB d X).trans_eq ?_
  unfold joinsDownB
  refine iInf_congr fun x => ?_
  refine congrArg_2 (* sqcap *) ?fwd ?bwd
  * refine congrArg (fun t => memB x d ? t) ?_
    exact iSup_congr fun e =>
      congrArg (fun t => t sqcap memB x e)
      (inWayBelowDownB_eq_memB_pfinB_wayBelow e d X)
  * refine congrArg (fun t => t ? memB x d) ?_
    exact iSup_congr fun e =>
      congrArg (fun t => t sqcap memB x e)
      (inWayBelowDownB_eq_memB_pfinB_wayBelow e d X)

/-- `P_fin^A(X)` is a base for `P^A(X)` under `subseq`. Not `proposition_28`. -/
theorem isBaseSubsetB_pfinB_powerB (X : AName.{u} A) :
  isBaseSubsetB (pfinB X) (powerB X) = top := by
  unfold isBaseSubsetB
  rw [subsetB_pfinB_powerB, top_inf_eq]
  refine iInf_eq_top.mpr fun d => himp_eq_top_iff.mpr ?_
  have hdir := (directedDownB_pfinB_inter d X).ge
  have hjoin := joinsDownB_pfinB_inter d X
  exact le_inf (le_top.trans hdir) hjoin

/-- Congruence of `isBaseSubsetB` in the base: `?B = B' ? = 1` implies
the Boolean values agree. -/
theorem isBaseSubsetB_eqB_congr_left {B B' D : AName.{u} A}

```

Lean 4 source (lines 1601–1618)

```

  (h : eqB B B' = top) :
  isBaseSubsetB B D = isBaseSubsetB B' D := by
  unfold isBaseSubsetB
  have hsub : subsetB B D = subsetB B' D := subsetB_eqB_congr_left h
  have hmem (e : AName.{u} A) : memB e B = memB e B' :=
    eqB_top_memB_right h
  simp_rw [hsub, hmem]

/-- `check(P_fin(Y))` is a base for `P^A(check Y)`, via `proposition_3`
and `isBaseSubsetB_eqB_congr_left`. Not `proposition_28`. -/
theorem isBaseSubsetB_check_pfin_powerB (Y : PSet.{u}) :
  isBaseSubsetB (check (A := A) (pfin Y)) (powerB (check Y)) = top := by
  rw [← isBaseSubsetB_eqB_congr_left (proposition_3 (A := A) Y)]
  exact isBaseSubsetB_pfinB_powerB (check (A := A) Y)

```

end

end Scott2026

A.14 Scott2026/Proposition28.lean

126 lines.

Lean 4 source

```
/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/

import Scott2026.ExtensionalVA
import Scott2026.InternalDomain

/-!
# Proposition 28

This module joins the syntactic `?_Set` formulas with their semantic Boolean
values and packages all clauses of Proposition 28. For the checked case we
use `checkExt`, the extensional presentation of `check` whose domain has one
index per extensional set. This is exactly the representation needed by the
paper's pointwise strictness argument.
-/

universe u

namespace Scott2026

open AName SetFormula

variable {A : Type u} [CompleteBooleanAlgebra A]

/-- Extensional equality of parameters is preserved by `P_fin^A`. -/
theorem eqB_pfinB_congr {X Y : AName.{u} A} (h : eqB X Y = top) :
  eqB (pfinB X) (pfinB Y) = top := by
  rw [eqB_eq_iInf]
  refine iInf_eq_top.mpr fun z => ?_
  have hs : subsetB z X = subsetB z Y := by
    rw [subsetB_eq_iInf, subsetB_eq_iInf]
    exact iInf_congr fun w =>
      congrArg (fun t => memB w z ? t) (eqB_top_memB_right (z := w) h)
  rw [memB_pfinB, memB_pfinB, hs, himp_self, top_inf_eq]

theorem eqB_top_trans {X Y Z : AName.{u} A}
  (hXY : eqB X Y = top) (hYZ : eqB Y Z = top) :
  eqB X Z = top :=
  top_unique ((eqB_trans X Y Z).trans' (le_inf hXY.ge hYZ.ge))

/-- Extensional version of Proposition 3:
`checkExt(P_fin(Y)) = P_fin^A(checkExt Y)` with Boolean value one. -/
theorem proposition_3_ext (Y : PSet.{u}) [Nontrivial A] :
  eqB (pfinB (checkExt (A := A) Y))
    (checkExt (A := A) (pfin Y)) = top := by
  have hp :=
    eqB_pfinB_congr (eqB_check_checkExt (A := A) Y)
  have hp' :
    eqB (pfinB (checkExt (A := A) Y))
      (pfinB (check (A := A) Y)) = top := by
    rw [eqB_comm]
    exact hp
  exact eqB_top_trans (eqB_top_trans hp' (proposition_3 (A := A) Y))
    (eqB_check_checkExt (A := A) (pfin Y))
```

```

/-- The checked finite subsets form a base for the power of the extensional
checked presentation. -/
theorem isBaseSubsetB_checkExt_pfin_powerB (Y : PSet.{u}) [Nontrivial A] :
  isBaseSubsetB (checkExt (A := A) (pfin Y))
    (powerB (checkExt (A := A) Y)) = top := by
  rw [ <- isBaseSubsetB_eqB_congr_left (proposition_3_ext (A := A) Y)]
  exact isBaseSubsetB_pfinB_powerB (checkExt (A := A) Y)

/-- The checked finite subsets of a paper-facing extensional ZFC set. -/
noncomputable def checkPfinZF (Y : ZFSet.{u}) : AName.{u} A :=
  checkExt (A := A) (pfin Y.out)

/-- Proposition 3 at the extensional ZFC boundary. -/
theorem proposition_3_zf (Y : ZFSet.{u}) [Nontrivial A] :
  eqB (pfinB (checkZF (A := A) Y)) (checkPfinZF (A := A) Y) = top :=
  proposition_3_ext (A := A) Y.out

/-- Checked finite subsets form a base, stated on Mathlib's extensional ZFC
universe rather than on a chosen pre-set presentation. -/
theorem isBaseSubsetB_checkZF_pfin_powerB (Y : ZFSet.{u}) [Nontrivial A] :
  isBaseSubsetB (checkPfinZF (A := A) Y)
    (powerB (checkZF (A := A) Y)) = top :=
  isBaseSubsetB_checkExt_pfin_powerB (A := A) Y.out

/-- Proposition 28's continuous-lattice assertion as the Boolean value of its
actual `?_Set` formula. -/
theorem proposition_28_continuous_value (X : AName.{u} A) :
  bval (isContinuousLatticeSubsetF (0 : Fin 1))
    (fun _ => powerB X) = top := by
  rw [bval_isContinuousLatticeSubsetF]
  exact isContinuousLatticeSubsetB_powerB X

/-- Proposition 28's base assertion as the Boolean value of its actual
`?_Set` formula. -/
theorem proposition_28_base_value (X : AName.{u} A) :
  bval (isBaseSubsetF (0 : Fin 2) (1 : Fin 2))
    (fun i => if i = 0 then pfinB X else powerB X) = top := by
  rw [bval_isBaseSubsetF]
  change isBaseSubsetB (pfinB X) (powerB X) = top
  exact isBaseSubsetB_pfinB_powerB X

/-- The complete paper statement of Proposition 28 for an `A`-name `X`.
The final implication is the paper's `X = check Y` clause, with the
paper-exact extensional checked presentation. -/
def Proposition28Statement (X : AName.{u} A) : Prop :=
  bval (isContinuousLatticeSubsetF (0 : Fin 1))
    (fun _ => powerB X) = top /\
  bval (isBaseSubsetF (0 : Fin 2) (1 : Fin 2))
    (fun i => if i = 0 then pfinB X else powerB X) = top /\
  (oid (powerB X)).IsComplete.{u} /\
  (oid (powerB X)).IsTotal /\
  forall Y : ZFSet.{u}, X = checkZF (A := A) Y ->
    isBaseSubsetB (checkPfinZF (A := A) Y) (powerB X) = top /\
    (oid (powerB X)).IsStrict

/-- Proposition 28, with all clauses in one theorem. -/
theorem proposition_28 (X : AName.{u} A) [Nontrivial A] :
  Proposition28Statement X := by
  refine <proposition_28_continuous_value X,
    proposition_28_base_value X,
    oid_powerB_isComplete X,
    oid_powerB_isTotal X, ?_>
  intro Y hX

```

```

    subst X
    exact <isBaseSubsetB_checkZF_pfin_powerB Y,
      oid_powerB_checkExt_isStrict Y.out>

end Scott2026

```

A.15 Scott2026/Domain.lean

281 lines.

Lean 4 source

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/

import Mathlib.Order.CompleteLattice.Basic
import Mathlib.Order.ScottContinuity
import Mathlib.Data.Set.Finite.Basic
import Mathlib.Data.Set.Lattice
import Mathlib.Data.Set.Countable
import Scott1972.ContinuousLattice.WayBelow

/-!
# Domain theory background (CSL 2026, S4.1) and Proposition 27

S4.1 uses the order-theoretic way-below relation. The 1972 topological
form lives in `Scott1972.ContinuousLattice` and implies this one.
-/

open Set

namespace Scott2026

variable {D E : Type*}

/-- Way-below relation of S4.1, on a complete lattice. -/
def WayBelow [CompleteLattice D] (d e : D) : Prop :=
  forall ?S : Set D?, S.Nonempty -> DirectedOn (* <= *) S -> e <= sSup S -> exists
    s in S, d <= s

notation:50 d " << " e:50 => WayBelow d e

theorem wayBelow_le [CompleteLattice D] {d e : D} (h : d << e) : d <= e := by
  obtain <s, hs, hds> := h (S := {e}) <e, mem_singleton e>
  (directedOn_singleton e) (by simp)
  rwa [mem_singleton_iff.mp hs] at hds

/-- Scott 1972 topological `<<` implies the S4.1 interpolative `<<`. -/
theorem wayBelow_of_scott1972 [CompleteLattice D] {d e : D}
  (h : Scott1972.ContinuousLattice.WayBelow d e) : WayBelow d e := by
  intro S hne hdir hele
  obtain <U, hU, heU, hsub> := h
  have : sSup S in U := hU.1 hele heU
  obtain <s, hsS, hsU> := hU.2 hne hdir this
  exact <s, hsS, hsub hsU>

/-- A complete lattice is continuous as a dcpo when every element is the
directed supremum of elements way-below it (S4.1). -/
def IsContinuousLattice (D : Type*) [CompleteLattice D] : Prop :=

```



```

forall d : D, DirectedOn (* <= *) {e | e << d} /\ d = sSup {e | e << d}

/-- Paper ?continuous dcpo? on a complete lattice: every `y` is the
directed supremum of `{x | x << y}`. This is `IsContinuousLattice`; it
does not add a separate dcpo-interpolation axiom, and `not IsContinuousDcpo`
does not claim failure of directed-completeness. -/
def IsContinuousDcpo (D : Type*) [CompleteLattice D] : Prop :=
  IsContinuousLattice D

/-- Scott-continuous maps of S4.1. -/
abbrev IsScottContinuous [Preorder D] [Preorder E] (f : D -> E) : Prop :=
  ScottContinuous f

/-- A dcpo in the paper's exact sense: every nonempty directed subset has a
least upper bound. -/
structure IsDcpo (D : Type*) [PartialOrder D] : Prop where
  directed_lub :
    forall S : Set D, S.Nonempty -> DirectedOn (* <= *) S ->
      exists d : D, IsLUB S d

/-- The dcpo of Scott-continuous maps, ordered pointwise. -/
abbrev ScottMap (D E : Type*) [Preorder D] [Preorder E] :=
  {f : D -> E // ScottContinuous f}

/-- Definition 19 at its paper type. This does not specialize the underlying
dcpo to a complete lattice and the function-space carrier contains exactly
the Scott-continuous maps. -/
structure ReflexiveDcpo19 (D : Type*) [PartialOrder D] [OrderBot D] where
  dcpo : IsDcpo D
  funMap : D -> ScottMap D D
  lam : ScottMap D D -> D
  fun_scott : ScottContinuous funMap
  lam_scott : ScottContinuous lam
  retract : forall f : ScottMap D D, funMap (lam f) = f

/-- Definition 19's extensionality clause. -/
def ReflexiveDcpo19.IsExtensional {D : Type*} [PartialOrder D] [OrderBot D]
  (R : ReflexiveDcpo19 D) : Prop :=
  forall d : D, R.lam (R.funMap d) = d

/-- Paper-facing name for Definition 19. -/
abbrev definition_19 (D : Type*) [PartialOrder D] [OrderBot D] :=
  ReflexiveDcpo19 D

/-- Definition 19: a reflexive dcpo, specialized to complete lattices. -/
structure ReflexiveDcpo (D : Type*) [CompleteLattice D] where
  funMap : D -> (D -> D)
  lam : (D -> D) -> D
  fun_scott : IsScottContinuous funMap
  lam_scott : IsScottContinuous lam
  fun_scott_pt : forall d, IsScottContinuous (funMap d)
  retract : forall f : D -> D, IsScottContinuous f -> funMap (lam f) = f

/-- Uncurried application associated to a reflexive dcpo. -/
def ReflexiveDcpo.app {D : Type*} [CompleteLattice D] (R : ReflexiveDcpo D)
  (d e : D) : D :=
  R.funMap d e

/-- Finite subsets of `T` are directed under inclusion. -/
theorem finite_subsets_directed {X : Type*} (T : Set X) :
  DirectedOn (* subseteq *) {S : Set X | S.Finite /\ S subseteq T} := by
  intro S hS U hU
  exact <S U U, <hS.1.union hU.1, union_subset hS.2 hU.2>,

```

```

subset_union_left, subset_union_right>

/-- The union of the finite subsets of `T` is `T`. -/
theorem sUnion_finite_subsets {X : Type*} (T : Set X) :
  ?_0 {S : Set X | S.Finite /\ S subseq T} = T := by
  ext x
  constructor
  * intro hx
    obtain <S, hS, hxS> := mem_sUnion.mp hx
    exact hS.2 hxS
  * intro hx
    exact mem_sUnion.mpr <{x}, <finite_singleton x, singleton_subset_iff.mpr hx>,
      mem_singleton x>

/-- Proposition 27, one direction: if `S` <= `T` in `Set X`, then `S` is finite
and `S` subseq `T`. -/
theorem prop27_wayBelow_of {X : Type*} {S T : Set X}
  (h : WayBelow (D := Set X) S T) : S.Finite /\ S subseq T := by
  have hdir := finite_subsets_directed T
  have hne : {U : Set X | U.Finite /\ U subseq T}.Nonempty :=
    <{ }, finite_empty, empty_subset _>
  have hle : T <= sSup {U : Set X | U.Finite /\ U subseq T} := by
    intro x hx
    have : x in ?_0 {U : Set X | U.Finite /\ U subseq T} := by
      rw [sUnion_finite_subsets]; exact hx
    simpa [sSup_eq_sUnion] using this
  obtain <U, hU, hSU> := h hne hdir hle
  exact <hU.1.subset hSU, hSU.trans hU.2>

/-- Proposition 27, converse: a finite subset of `T` is way-below `T`. -/
theorem prop27_wayBelow_finite {X : Type*} {S T : Set X}
  (hS : S.Finite) (hST : S subseq T) : WayBelow (D := Set X) S T := by
  intro ? hne hdir hTle
  have hT : T subseq ?_0 ? := by simpa [sSup_eq_sUnion] using hTle
  have : forall {S' : Set X} (hS' : S'.Finite), S' subseq T -> exists U in ?, S'
    subseq U := by
    intro S' hS'
    refine Set.Finite.induction_on (motive := fun S' _ => S' subseq T -> exists U in
      ?, S' subseq U)
      S' hS' ?empty ?insert
  * intro _
    obtain <U, hU> := hne
    exact <U, hU, empty_subset U>
  * intro a s ha hs ih hsT
    have hs_sub : s subseq T := (subset_insert a s).trans hsT
    obtain <U, hU, hUs> := ih hs_sub
    have haT : a in T := hsT (mem_insert a s)
    obtain <V, hV, haV> := mem_sUnion.mp (hT haT)
    obtain <W, hW, hUW, hVW> := hdir U hU V hV
    exact <W, hW, insert_subset (hVW haV) (hUs.trans hUW)>
  exact this hS hST

/-- Proposition 27: `S` <= `T` in `?(X)` iff `S` is finite and `S` subseq `T`. -/
theorem prop27_wayBelow_iff {X : Type*} {S T : Set X} :
  WayBelow (D := Set X) S T <=> S.Finite /\ S subseq T :=
  <prop27_wayBelow_of, fun h => prop27_wayBelow_finite h.1 h.2>

/-- The way-below sets in `?(X)` are exactly the finite subsets. -/
theorem wayBelow_set_eq {X : Type*} (T : Set X) :
  {S : Set X | S <= T} = {S | S.Finite /\ S subseq T} := by
  ext S
  exact prop27_wayBelow_iff

```

```

/-- Proposition 27:  $\mathcal{P}(X)$  is a continuous lattice, with finite subsets as a base. -/
theorem isContinuousLattice_set (X : Type*) : IsContinuousLattice (Set X) := by
  intro T
  rw [wayBelow_set_eq]
  exact <finite_subsets_directed T,
    ((sSup_eq_sUnion _).trans (sUnion_finite_subsets T)).symm>

/-- If  $X$  is countable, its finite subsets form a countable family. -/
theorem finite_subsets_countable {X : Type*} [Countable X] :
  Set.Countable {S : Set X | S.Finite} := by
  classical
  have hrange :
    {S : Set X | S.Finite} =
      Set.range (fun s : Finset X => (s : Set X)) := by
  ext S
  constructor
  * intro hS
  exact <hS.toFinset, hS.coe_toFinset>
  * rintro <s, rfl>
  exact s.finite_toSet
  rw [hrange]
  exact Set.countable_range _

/-- All clauses of Proposition 27. The ambient  $\text{CompleteLattice } (\text{Set } X)$ 
instance supplies the complete-lattice (hence dcpo) clause. -/
def Proposition27Statement (X : Type*) : Prop :=
  IsContinuousLattice (Set X) /\
    (forall S T : Set X, WayBelow (D := Set X) S T <=> S.Finite /\ S subseteq T) /\
    (forall T : Set X,
      DirectedOn (* subseteq *) {S : Set X | S.Finite /\ S subseteq T} /\
        T = sSup {S : Set X | S.Finite /\ S subseteq T}) /\
    (Countable X -> Set.Countable {S : Set X | S.Finite})

/-- Proposition 27 with its lattice, way-below, finite-base, and countable-base
clauses packaged together. -/
theorem proposition27_full (X : Type*) : Proposition27Statement X := by
  refine <isContinuousLattice_set X, fun _ => prop27_wayBelow_iff,
    fun T => <finite_subsets_directed T, ?_, ?_>
  * exact ((sSup_eq_sUnion _).trans (sUnion_finite_subsets T)).symm
  * intro hX
  letI : Countable X := hX
  exact finite_subsets_countable

/-!
## Scott-open sets (Lemma 35(i))

Wrappers around Scott 1972  $\text{ScottOpen}$  used to separate Booleans and
numerals in the Scott topology of a complete lattice (and of  $\mathcal{P}(X)$ ).
-/

/-- Scott-open sets of a complete lattice (Scott 1972 induced topology). -/
abbrev ScottOpen {D : Type*} [CompleteLattice D] (U : Set D) : Prop :=
  Scott1972.ContinuousLattice.ScottOpen U

/-- The complement of a principal down-set is Scott-open. -/
theorem scottOpen_not_le {D : Type*} [CompleteLattice D] (L : D) :
  ScottOpen {z : D | not z <= L} := by
  refine <fun a b hab ha hb => ha (le_trans hab hb), fun S _hSne _hSdir hmem => ?_>
  by_contra hcon
  refine hmem (sSup_le fun s hs => ?_)
  by_contra hsL
  exact hcon <s, hs, hsL>

```

```

/-- Membership sets `{s | a in s}` are Scott-open in `?(X)`. -/
theorem scottOpen_mem {X : Type*} (a : X) :
  ScottOpen {s : Set X | a in s} := by
  refine <?upper, ?inacc>
  * intro s t hst hs
    have hsub : s subseq t := hst
    exact hsub hs
  * intro ?_hne _hdir hmem
    have : a in ?_0 ? := by
      simp [sSup_eq_sUnion] using hmem
    obtain <s, hs?, has> := mem_sUnion.mp this
    exact <s, hs?, has>

/-- Scott topologies of complete lattices are T0: unequal points are
separated by a Scott-open. -/
theorem exists_scottOpen_separates {D : Type*} [CompleteLattice D]
  {x y : D} (h : x != y) :
  exists U : Set D, ScottOpen U /\ ((x in U /\ y notin U) \/ (y in U /\ x
  notin U)) := by
  by_cases hxy : x <= y
  * have hyx : not y <= x := fun hyx => h (le_antisymm hxy hyx)
    refine <{z | not z <= x}, scottOpen_not_le x, Or.inr <hyx, ?_>>
    exact fun hx => hx le_refl
  * refine <{z | not z <= y}, scottOpen_not_le y, Or.inl <hxy, ?_>>
    exact fun hy => hy le_refl

/-- Preimages of Scott-open sets under Scott-continuous maps are Scott-open. -/
theorem scottOpen_preimage {D E : Type*} [CompleteLattice D] [CompleteLattice E]
  {f : D -> E} (hf : IsScottContinuous f) {U : Set E} (hU : ScottOpen U) :
  ScottOpen (f ⁻¹ U) := by
  have hmono : Monotone f := hf.monotone
  refine <fun a b hab ha => hU.1 (hmono hab) ha, fun S hS hSdir hmem => ?_>
  have hfS : IsLUB (f '' S) (f (sSup S)) := hf hS hSdir (isLUB_sSup S)
  have hsupU : sSup (f '' S) in U := by
    rwa [hfS.sSup_eq]
  have hdirf : DirectedOn (* <= *) (f '' S) := by
    intro y hy z hz
    obtain <s, hs, rfl> := (mem_image _ _ _).mp hy
    obtain <t, ht, rfl> := (mem_image _ _ _).mp hz
    obtain <u, hu, hsu, ht> := hSdir s hs t ht
    exact <f u, mem_image_of_mem f hu, hmono hsu, hmono ht>
  obtain <y, hyS, hyU> := hU.2 (hS.image f) hdirf hsupU
  obtain <a, haS, rfl> := (mem_image _ _ _).mp hyS
  exact <a, haS, hyU>
end Scott2026

```

A.16 Scott2026/Lambda.lean

1402 lines.

Lean 4 source (lines 1–400)

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/

import Mathlib.Data.Finset.Basic
import Mathlib.Data.Fintype.EquivFin

/-!

```

```

# Untyped fun -calculus (Definitions 20, 23 and Example 21)
-/

namespace Scott2026

variable {Var : Type*}

/-- Definition 20: pure fun -terms over a set of variables (no domain constants). -/
inductive Lam (Var : Type*) where
| var : Var -> Lam Var
| abs : Var -> Lam Var -> Lam Var
| app : Lam Var -> Lam Var -> Lam Var
deriving Repr

namespace Lam

/-- Free variables (Definition 20). -/
def fv [DecidableEq Var] : Lam Var -> Finset Var
| var x => {x}
| abs x M => fv M \ {x}
| app M N => fv M ∪ fv N

/-- Term size, used to justify capture-avoiding substitution. -/
def size : Lam Var -> Nat
| var _ => 0
| abs _ M => size M + 1
| app M N => size M + size N + 1

/-- All names occurring in a term, free or bound. -/
def vars [DecidableEq Var] : Lam Var -> Finset Var
| var x => {x}
| abs x M => insert x (vars M)
| app M N => vars M ∪ vars N

theorem fv_subset_vars [DecidableEq Var] (M : Lam Var) : M.fv ⊆ M.vars := by
  induction M with
  | var x => simp [fv, vars]
  | abs x M ih =>
    intro y hy
    simp only [fv, vars, Finset.mem_sdiff, Finset.mem_insert] at hy |-
    exact Or.inr (ih hy.1)
  | app M N ihM ihN =>
    intro y hy
    simp only [fv, vars, Finset.mem_union] at hy |-
    exact hy.elim (fun h => Or.inl (ihM h)) (fun h => Or.inr (ihN h))

/-- Naive substitution: does not rename binders. Unrestricted b with this
function is unsound (`substNaive_captures`). -/
def substNaive [DecidableEq Var] : Lam Var -> Var -> Lam Var -> Lam Var
| var y, x, N => if y = x then N else var y
| abs y M, x, N =>
  if y = x then abs y M else abs y (substNaive M x N)
| app M_1 M_2, x, N => app (substNaive M_1 x N) (substNaive M_2 x N)

/-- The paper's `M[x:=N]` in older lemmas and `LamEqNC` is naive substitution.
Do not silently change this. Capture-avoiding substitution is `substCA`. -/
abbrev subst [DecidableEq Var] : Lam Var -> Var -> Lam Var -> Lam Var :=
  substNaive

@[simp] theorem subst_var [DecidableEq Var] (y x : Var) (N : Lam Var) :
  (var y).subst x N = if y = x then N else var y :=
  rfl

```

```

@[simp] theorem subst_app [DecidableEq Var] (M_1 M_2 : Lam Var) (x : Var) (N : Lam Var) :
  (app M_1 M_2).subst x N = app (M_1.subst x N) (M_2.subst x N) :=
  rfl

theorem subst_abs [DecidableEq Var] (y : Var) (M : Lam Var) (x : Var) (N : Lam Var) :
  (abs y M).subst x N = if y = x then abs y M else abs y (M.subst x N) :=
  rfl

/-- `N` is free for `x` in `M`. Because `subst` does not rename binders, this is
the anti-capture condition needed for the substitution lemma: a binder `y` != `x`
may not occur free in `N` unless `x` itself is not free in that scope. -/
def FreeFor [DecidableEq Var] : Lam Var -> Var -> Lam Var -> Prop
| var _, _, _ => True
| app M_1 M_2, x, N => FreeFor M_1 x N /\ FreeFor M_2 x N
| abs y M, x, N => y = x \/ (FreeFor M x N /\ (y notin N.fv \/ x notin M.fv))

@[simp] theorem freeFor_var [DecidableEq Var] (y x : Var) (N : Lam Var) :
  (var y).FreeFor x N :=
  trivial

@[simp] theorem freeFor_app [DecidableEq Var] (M_1 M_2 : Lam Var) (x : Var)
  (N : Lam Var) :
  (app M_1 M_2).FreeFor x N <-> M_1.FreeFor x N /\ M_2.FreeFor x N :=
  Iff.rfl

theorem freeFor_abs_eq [DecidableEq Var] (x : Var) (M N : Lam Var) :
  (abs x M).FreeFor x N :=
  Or.inl rfl

theorem freeFor_abs_of_ne [DecidableEq Var] {y x : Var} {M N : Lam Var}
  (hne : y != x) (h : (abs y M).FreeFor x N) :
  M.FreeFor x N /\ (y notin N.fv \/ x notin M.fv) :=
  h.resolve_left hne

/-- Vacuous substitution: if `x` is not free in `M`, then `N` is free for `x`. -/
theorem freeFor_of_not_mem_fv [DecidableEq Var] {M : Lam Var} {x : Var}
  (N : Lam Var) (h : x notin M.fv) : M.FreeFor x N := by
  induction M with
  | var y =>
    trivial
  | app M_1 M_2 ih_1 ih_2 =>
    simp only [fv, Finset.mem_union, not_or] at h
    exact <ih_1 h.1, ih_2 h.2>
  | abs y M ih =>
    simp only [FreeFor]
    by_cases hyx : y = x
    * exact Or.inl hyx
    * right
      have hxM : x notin M.fv := by
        intro hx
        exact h (Finset.mem_sdiff.mpr <hx, mt Finset.mem_singleton.mp (Ne.symm hyx)>)
      exact <ih hxM, Or.inr hxM>

/-- A closed substitutend is free for `x` in every term (no capture is possible). -/
theorem freeFor_of_not_mem_vars [DecidableEq Var] {M : Lam Var} {z : Var}
  (x : Var) (hz : z notin M.vars) : M.FreeFor x (var z) := by
  induction M with
  | var _ =>
    trivial
  | app _ _ ih_1 ih_2 =>
    simp only [vars, Finset.mem_union, not_or] at hz
    exact <ih_1 hz.1, ih_2 hz.2>
  | abs y M ih =>

```

```

    simp only [FreeFor, vars, Finset.mem_insert, not_or] at hz |-
    by_cases hyx : y = x
    * exact Or.inl hyx
    * exact Or.inr <ih hz.2, Or.inl (by
      simp [fv]
      exact Ne.symm hz.1)>

theorem freeFor_of_closed [DecidableEq Var] (M : Lam Var) (x : Var) {N : Lam Var}
  (hN : N.fv = {}) : M.FreeFor x N := by
  induction M with
  | var _ =>
    trivial
  | app _ _ ih_1 ih_2 =>
    exact <ih_1, ih_2>
  | abs y M ih =>
    simp only [FreeFor]
    by_cases hyx : y = x
    * exact Or.inl hyx
    * exact Or.inr <ih, Or.inl (hN |> (Finset.notMem_empty y))>

/-- If `x` is not free in `M`, substitution is the identity. -/
theorem subst_fresh [DecidableEq Var] {M : Lam Var} {x : Var} (N : Lam Var)
  (h : x notin M.fv) : M.subst x N = M := by
  induction M with
  | var y =>
    have hyx : y != x := by
      intro hyx
      exact h (hyx |> Finset.mem_singleton_self y)
    simp [hyx]
  | abs y M ih =>
    simp only [subst, substNaive]
    by_cases hyx : y = x
    * simp [hyx]
    * simp [hyx]
      have hxM : x notin M.fv := by
        intro hx
        exact h (Finset.mem_sdiff.mpr <hx, mt Finset.mem_singleton.mp (Ne.symm hyx)>)
      exact ih hxM
  | app M_1 M_2 ih_1 ih_2 =>
    simp only [fv, Finset.mem_union, not_or] at h
    simp [ih_1 h.1, ih_2 h.2]

theorem size_substNaive_var [DecidableEq Var] (M : Lam Var) (y z : Var) :
  (M.substNaive y (var z)).size = M.size := by
  induction M with
  | var w =>
    simp only [substNaive, size]
    split_ifs <;> simp [size]
  | abs w M ih =>
    simp only [substNaive, size]
    split_ifs <;> simp [size, ih]
  | app M N ihM ihN =>
    simp [substNaive, size, ihM, ihN]

/-- Pick a name outside `avoid`, falling back to `default` if `Var` is finite
and exhausted. Under `[Infinite Var]` the fallback is never used. -/
noncomputable def pickFresh [DecidableEq Var] (avoid : Finset Var) (default : Var) :
  Var :=
  let _ := Classical.propDecidable (exists z, z notin avoid)
  if h : exists z, z notin avoid then Classical.choose h else default

theorem pickFresh_of_exists [DecidableEq Var] {avoid : Finset Var} {default : Var}
  (h : exists z, z notin avoid) : pickFresh avoid default notin avoid := by

```

```

simpa [pickFresh, h] using Classical.choose_spec h

theorem pickFresh_not_mem [DecidableEq Var] [Infinite Var] (avoid : Finset Var)
  (default : Var) : pickFresh avoid default notin avoid :=
  pickFresh_of_exists (Infinite.exists_notMem_finset avoid)

/-- Capture-avoiding substitution (paper Definition 23: `M[x:=N]`). Renames a
binder `y` when `y` in `fv(N)` and `x` is free in the body. On a finite
exhausted `Var` the fresh-name fallback may fail to avoid capture;
`interp_sound_full` assumes `Infinite`. -/
noncomputable def substCA [DecidableEq Var] : Lam Var -> Var -> Lam Var -> Lam Var
| var y, x, N => if y = x then N else var y
| abs y M, x, N =>
  if y = x then abs y M
  else if x notin M.fv then abs y M
  else if y notin N.fv then abs y (substCA M x N)
  else
    let z := pickFresh (M.vars U N.fv U {x, y}) y
    abs z (substCA (M.substNaive y (var z)) x N)
| app M_1 M_2, x, N => app (substCA M_1 x N) (substCA M_2 x N)
termination_by M => M.size
decreasing_by
  * change M.size < M.size + 1; omega
  * rw [size_substNaive_var]; change M.size < M.size + 1; omega
  * change M_1.size < M_1.size + M_2.size + 1; omega
  * change M_2.size < M_1.size + M_2.size + 1; omega

theorem substCA_var [DecidableEq Var] (y x : Var) (N : Lam Var) :
  substCA (var y) x N = if y = x then N else var y := by
  rw [substCA]

theorem substCA_app [DecidableEq Var] (M_1 M_2 : Lam Var) (x : Var) (N : Lam Var) :
  substCA (app M_1 M_2) x N = app (substCA M_1 x N) (substCA M_2 x N) := by
  rw [substCA]

theorem substCA_abs [DecidableEq Var] (y : Var) (M : Lam Var) (x : Var) (N : Lam Var) :
  substCA (abs y M) x N =
    if y = x then abs y M
    else if x notin M.fv then abs y M
    else if y notin N.fv then abs y (substCA M x N)
    else
      let z := pickFresh (M.vars U N.fv U {x, y}) y
      abs z (substCA (M.substNaive y (var z)) x N) := by
  rw [substCA]

theorem substCA_fresh [DecidableEq Var] {M : Lam Var} {x : Var} (N : Lam Var)
  (h : x notin M.fv) : substCA M x N = M := by
  induction M generalizing N with
  | var y =>
    have hyx : y != x := fun hyx => h (hyx |> Finset.mem_singleton_self y)
    simp [substCA_var, hyx]
  | abs y M_1h =>
    rw [substCA_abs]
    by_cases hyx : y = x
    * simp [hyx]
    * simp [hyx]
    have hxM : x notin M.fv := fun hx =>
      h (Finset.mem_sdiff.mpr <hx, mt Finset.mem_singleton.mp (Ne.symm hyx)>)
    simp [hxM]
  | app M_1 M_2 ih_1 ih_2 =>
    simp only [fv, Finset.mem_union, not_or] at h
    simp [substCA_app, ih_1 N h.1, ih_2 N h.2]

```



```

/-- When `N` is free for `x` in `M`, capture-avoiding and naive substitution
agree (no rename is triggered, or `x` is not free). -/
theorem substCA_eq_substNaive [DecidableEq Var] {M : Lam Var} {x : Var}
  {N : Lam Var} (hfree : M.FreeFor x N) :
  substCA M x N = M.substNaive x N := by
  induction M generalizing N with
  | var y =>
    simp [substCA_var, substNaive]
  | abs y M ih =>
    rw [substCA_abs, substNaive]
    by_cases hyx : y = x
    * simp [hyx]
    * simp [hyx]
      obtain <hM, hcap> := freeFor_abs_of_ne hyx hfree
      cases hcap with
      | inl hyN =>
        by_cases hxM : x in M.fv
        * simp [hyN, hxM, ih hM]
        * simp [hxM, subst_fresh (N := N) hxM]
      | inr hxM =>
        simp [hxM, subst_fresh (N := N) hxM]
  | app M_1 M_2 ih_1 ih_2 =>
    obtain <h_1, h_2> := hfree
    simp [substCA_app, substNaive, ih_1 h_1, ih_2 h_2]

/-- Substituting a variable for itself is the identity. -/
theorem substCA_self [DecidableEq Var] (M : Lam Var) (x : Var) :
  substCA M x (var x) = M := by
  induction M with
  | var y =>
    by_cases hyx : y = x
    * simp [substCA_var, hyx]
    * simp [substCA_var, hyx]
  | abs y M ih =>
    rw [substCA_abs]
    by_cases hyx : y = x
    * simp [hyx]
    * simp [hyx]
      by_cases hxM : x in M.fv
      * have hyN : y notin (var x).fv := by
        simp [fv]
        exact hyx
      have hxM' : not x notin M.fv := fun h => h hxM
      simp [hxM', hyN, ih]
      * simp [hxM]
  | app M N ihM ihN =>
    simp [substCA_app, ihM, ihN]

/-- Closed terms are unchanged by capture-avoiding substitution. -/
theorem substCA_of_closed [DecidableEq Var] {M : Lam Var} (h : M.fv = {})
  (x : Var) (N : Lam Var) : substCA M x N = M :=
  substCA_fresh N (h |> Finset.notMem_empty x)

/-- Naive substitution captures: `(fun x. fun y. x) y` contracts to `fun y. y`. -/
theorem substNaive_captures :
  substNaive (abs (1 : Fin 2) (var 0)) 0 (var 1) = abs 1 (var 1) := by
  simp [substNaive]

theorem substNaive_captures_not_freeFor :
  not (abs (1 : Fin 2) (var 0)).FreeFor 0 (var 1) := by
  intro h
  have hyx : (1 : Fin 2) != 0 := by decide
  obtain <_, hcap> := freeFor_abs_of_ne hyx h

```

```

cases hcap with
| inl hyN =>
  exact hyN (by simp [fv])
| inr hxM =>
  exact hxM (by simp [fv])

/-- Example 21: the inductive clauses for `?(Var)`. -/
def IsInductive (S : Set (Lam Var)) : Prop :=
  (forall x, var x in S) /\
  (forall x M, M in S -> abs x M in S) /\
  (forall M N, M in S -> N in S -> app M N in S)

theorem isInductive_univ : IsInductive (Set.univ : Set (Lam Var)) :=
  <fun _ => trivial, fun _ _ => trivial, fun _ _ _ => trivial>

/-- `?(Var)` is the smallest inductive set (Example 21). -/
theorem lam_least_inductive {S : Set (Lam Var)} (h : IsInductive S) :
  forall M : Lam Var, M in S := by
  intro M
  induction M with
  | var x => exact h.1 x
  | abs x M ih => exact h.2.1 x M ih
  | app M N ihM ihN => exact h.2.2 M N ihM ihN

end Lam

/-- Definition 23: the equational theory `fun` -- CA-b, a, and the congruence
rules. `LamEqNC` remains the `FreeFor` fragment (naive subst, no a). -/
inductive LamEq [DecidableEq Var] : Lam Var -> Lam Var -> Prop where
| refl (M : Lam Var) : LamEq M M
| symm {M N : Lam Var} : LamEq M N -> LamEq N M
| trans {M N L : Lam Var} : LamEq M N -> LamEq N L -> LamEq M L
| app_left {M N Z : Lam Var} : LamEq M N -> LamEq (M.app Z) (N.app Z)
| app_right {M N Z : Lam Var} : LamEq M N -> LamEq (Z.app M) (Z.app N)
| xi (x : Var) {M N : Lam Var} : LamEq M N -> LamEq (Lam.abs x M) (Lam.abs x N)
| beta (x : Var) (M N : Lam Var) :
  LamEq ((Lam.abs x M).app N) (Lam.substCA M x N)
| alpha (x y : Var) (M : Lam Var) (hy : y notin M.fv) :
  LamEq (Lam.abs x M) (Lam.abs y (Lam.substCA M x (Lam.var y)))

theorem LamEq.app_congr [DecidableEq Var] {M N P Q : Lam Var}
  (hMN : LamEq M N) (hPQ : LamEq P Q) : LamEq (M.app P) (N.app Q) :=
  (LamEq.app_left hMN).trans (LamEq.app_right hPQ)

theorem LamEq.app_congr_3 [DecidableEq Var] {M N P Q R S : Lam Var}
  (hMN : LamEq M N) (hPQ : LamEq P Q) (hRS : LamEq R S) :
  LamEq ((M.app P).app R) ((N.app Q).app S) :=
  (LamEq.app_congr hMN hPQ).app_congr hRS

/-- Closed b: `substCA` agrees with naive substitution when `N` is closed. -/
theorem lamEq_beta_closed [DecidableEq Var] (x : Var) (M N : Lam Var)
  (hN : N.fv = {}) :
  LamEq ((Lam.abs x M).app N) (M.substNaive x N) := by
  have hb := LamEq.beta x M N
  rwa [Lam.substCA_eq_substNaive (Lam.freeFor_of_closed M x hN)] at hb

theorem LamEq.beta_of_eq [DecidableEq Var] {x : Var} {M N M' : Lam Var}
  (h : Lam.substCA M x N = M') :
  LamEq ((Lam.abs x M).app N) M' :=
  h |> LamEq.beta x M N

/-- Definition 23 (i): capture-avoiding b-conversion. -/
def lamEq_beta [DecidableEq Var] (x : Var) (M N : Lam Var) : Prop :=

```

```

LamEq ((Lam.abs x M).app N) (Lam.substCA M x N)

/-- Definition 23: the generators are CA-b, a, refl/symm/trans, app, and ?. -/
theorem definition_23 [DecidableEq Var] (x y : Var) (M N Z : Lam Var)
  (hy : y notin M.fv) :
  LamEq ((Lam.abs x M).app N) (Lam.substCA M x N) /\
  LamEq (Lam.abs x M) (Lam.abs y (Lam.substCA M x (Lam.var y))) /\
  LamEq M M /\
  (LamEq M N -> LamEq N M) /\
  (LamEq M N -> LamEq N Z -> LamEq M Z) /\
  (LamEq M N -> LamEq (M.app Z) (N.app Z)) /\
  (LamEq M N -> LamEq (Z.app M) (Z.app N)) /\

Lean 4 source (lines 401–800)

  (LamEq M N -> LamEq (Lam.abs x M) (Lam.abs x N)) :=
  <LamEq.beta x M N, LamEq.alpha x y M hy, LamEq.refl M, LamEq.symm,
  LamEq.trans, LamEq.app_left, LamEq.app_right, LamEq.xi x>

/-- Capture-free fragment of `LamEq`. Same rules as Definition 23, but b
requires `Lam.FreeFor` (the paper's capture-avoiding substitution). There is
still no a-rule; capturing `LamEq.beta` is excluded. -/
inductive LamEqNC [DecidableEq Var] : Lam Var -> Lam Var -> Prop where
| refl (M : Lam Var) : LamEqNC M M
| symm {M N : Lam Var} : LamEqNC M N -> LamEqNC N M
| trans {M N L : Lam Var} : LamEqNC M N -> LamEqNC N L -> LamEqNC M L
| app_left {M N Z : Lam Var} : LamEqNC M N -> LamEqNC (M.app Z) (N.app Z)
| app_right {M N Z : Lam Var} : LamEqNC M N -> LamEqNC (Z.app M) (Z.app N)
| xi (x : Var) {M N : Lam Var} : LamEqNC M N -> LamEqNC (Lam.abs x M) (Lam.abs x N)
| beta (x : Var) (M N : Lam Var) (h : M.FreeFor x N) :
  LamEqNC ((Lam.abs x M).app N) (Lam.subst M x N)

theorem LamEqNC.toLamEq [DecidableEq Var] {M N : Lam Var} :
  LamEqNC M N -> LamEq M N := by
  intro h
  induction h with
  | refl M => exact LamEq.refl M
  | symm _ ih => exact LamEq.symm ih
  | trans _ _ ih1 ih2 => exact LamEq.trans ih1 ih2
  | app_left _ ih => exact LamEq.app_left ih
  | app_right _ ih => exact LamEq.app_right ih
  | xi x _ ih => exact LamEq.xi x ih
  | beta x M N hfree =>
    have hb := LamEq.beta x M N
    rwa [Lam.substCA_eq_substNaive hfree] at hb

/-- Church Booleans on two distinct names (Definition 32 / Proposition 33). -/
def churchTrue : Lam (Fin 2) :=
  Lam.abs 0 (Lam.abs 1 (Lam.var 0))

def churchFalse : Lam (Fin 2) :=
  Lam.abs 0 (Lam.abs 1 (Lam.var 1))

theorem churchTrue_ne_false : churchTrue != churchFalse := by
  intro h
  injection h with _ hbody
  injection hbody with _ hbody2
  injection hbody2 with h3
  exact Fin.zero_ne_one h3

/-- Church numeral `n` as `fun f. fun x. f? x` on `Fin 2`. -/
def churchNum : Nat -> Lam (Fin 2)
| 0 => Lam.abs 0 (Lam.abs 1 (Lam.var 1))
| n + 1 =>

```

```

    Lam.abs 0 (Lam.abs 1
      (Lam.app (Lam.var 0)
        (Lam.app (Lam.app (churchNum n) (Lam.var 0)) (Lam.var 1))))

/-- The Church `if` combinator `fun b. fun t. fun e. b t e`, using a third name. -/
def churchIf : Lam (Fin 3) :=
  Lam.abs 0 (Lam.abs 1 (Lam.abs 2
    (Lam.app (Lam.app (Lam.var 0) (Lam.var 1)) (Lam.var 2))))

/-!
## Definition 32 combinators on `Nat`

`Fin 2` / `Fin 3` stubs above are unchanged. Capture-avoiding identities
need `[Infinite Var]`, so the paper package is stated on `Nat`.
-/

def churchTrueN : Lam Nat :=
  Lam.abs 0 (Lam.abs 1 (Lam.var 0))

def churchFalseN : Lam Nat :=
  Lam.abs 0 (Lam.abs 1 (Lam.var 1))

/-- Church numeral `n` as `fun f. fun x. f? x` on `Nat`. -/
def churchNumN : Nat -> Lam Nat
| 0 => Lam.abs 0 (Lam.abs 1 (Lam.var 1))
| n + 1 =>
  Lam.abs 0 (Lam.abs 1
    (Lam.app (Lam.var 0)
      (Lam.app (Lam.app (churchNumN n) (Lam.var 0)) (Lam.var 1))))

/-- `if = fun b t e. b t e`. -/
def churchIfN : Lam Nat :=
  Lam.abs 0 (Lam.abs 1 (Lam.abs 2
    (Lam.app (Lam.app (Lam.var 0) (Lam.var 1)) (Lam.var 2))))

/-- `succ = fun n f x. f (n f x)`. -/
def churchSucc : Lam Nat :=
  Lam.abs 0 (Lam.abs 1 (Lam.abs 2
    (Lam.app (Lam.var 1) (Lam.app (Lam.app (Lam.var 0) (Lam.var 1)) (Lam.var 2)))))

/-- Kleene predecessor `fun n f x. n (fun g h. h (g f)) (fun u. x) (fun id. id)`. -/
def churchPred : Lam Nat :=
  Lam.abs 0 (Lam.abs 1 (Lam.abs 2
    (Lam.app (Lam.app (Lam.app (Lam.var 0)
      (Lam.abs 3 (Lam.abs 4 (Lam.app (Lam.var 4) (Lam.app (Lam.var 3) (Lam.var 1)))))
      (Lam.abs 3 (Lam.var 2)))
      (Lam.abs 3 (Lam.var 3)))))

/-- `true` with binders `1,2`, used inside `0?`. -/
def churchTrueN' : Lam Nat :=
  Lam.abs 1 (Lam.abs 2 (Lam.var 1))

/-- `false` with binders `1,2`, used inside `0?`. -/
def churchFalseN' : Lam Nat :=
  Lam.abs 1 (Lam.abs 2 (Lam.var 2))

/-- `0? = fun n. n (fun x. false) true`. -/
def churchIsZero : Lam Nat :=
  Lam.abs 0 (Lam.app (Lam.app (Lam.var 0) (Lam.abs 1 churchFalseN')) churchTrueN')

theorem churchTrue_fv : churchTrue.fv = {} := by
  simp [churchTrue, Lam.fv]

```

```

theorem churchFalse_fv : churchFalse.fv = {} := by
  simp [churchFalse, Lam.fv]

theorem churchNum_fv : forall n, (churchNum n).fv = {} := by
  intro n
  induction n with
  | zero => simp [churchNum, Lam.fv]
  | succ n ih => simp [churchNum, Lam.fv, ih]

theorem churchTrueN_fv : churchTrueN.fv = {} := by
  simp [churchTrueN, Lam.fv]

theorem churchFalseN_fv : churchFalseN.fv = {} := by
  simp [churchFalseN, Lam.fv]

theorem churchNumN_fv : forall n, (churchNumN n).fv = {} := by
  intro n
  induction n with
  | zero => simp [churchNumN, Lam.fv]
  | succ n ih => simp [churchNumN, Lam.fv, ih]

theorem churchIfN_fv : churchIfN.fv = {} := by
  change (((({0} U {1} U {2} : Finset Nat) \ {2}) \ {1}) \ {0}) = {}
  decide

theorem churchSucc_fv : churchSucc.fv = {} := by
  change (((({1} U ({0} U {1} U {2}) : Finset Nat) \ {2}) \ {1}) \ {0}) = {}
  decide

theorem churchPred_fv : churchPred.fv = {} := by
  unfold churchPred
  simp [Lam.fv]
  decide

theorem churchTrueN'_fv : churchTrueN'.fv = {} := by
  simp [churchTrueN', Lam.fv]

theorem churchFalseN'_fv : churchFalseN'.fv = {} := by
  simp [churchFalseN', Lam.fv]

theorem churchIsZero_fv : churchIsZero.fv = {} := by
  simp [churchIsZero, churchFalseN', churchTrueN', Lam.fv]

/-!
## Iterator and fresh-binder numerals (helpers for succ / pred / `0?`)
-/

/-- `F? X`. -/
def churchIter : Nat -> Lam Nat -> Lam Nat -> Lam Nat
| 0, _F, X => X
| n + 1, F, X => F.app (churchIter n F X)

theorem churchIter_fv (n : Nat) (F X : Lam Nat) :
  (churchIter n F X).fv subseq F.fv U X.fv := by
  induction n with
  | zero =>
    intro y hy
    exact Finset.mem_union.mpr (Or.inr hy)
  | succ n ih =>
    intro y hy
    simp only [churchIter, Lam.fv, Finset.mem_union] at hy
    exact hy.elim (fun h => Finset.mem_union.mpr (Or.inl h))
      (fun h => ih h)

```

```

theorem churchIter_var_fv (n a b : Nat) :
  (churchIter n (Lam.var a) (Lam.var b)).fv subsesteq {a, b} := by
  have h := churchIter_fv n (Lam.var a) (Lam.var b)
  intro y hy
  have : y in (Lam.var a).fv U (Lam.var b).fv := h hy
  simp [Lam.fv] using this

theorem substCA_churchIter (n : Nat) (F X : Lam Nat) (x : Nat) (N : Lam Nat) :
  Lam.substCA (churchIter n F X) x N =
    churchIter n (Lam.substCA F x N) (Lam.substCA X x N) := by
  induction n with
  | zero =>
    simp [churchIter]
  | succ n ih =>
    simp [churchIter, Lam.substCA_app, ih]

/-- Church numeral with chosen binders (used to avoid capturing `shift`). -/
def churchNumBind (f x : Nat) : Nat -> Lam Nat
| 0 => Lam.abs f (Lam.abs x (Lam.var x))
| n + 1 =>
  Lam.abs f (Lam.abs x
    (Lam.app (Lam.var f)
      (Lam.app (Lam.app (churchNumBind f x n) (Lam.var f)) (Lam.var x))))

theorem churchNumBind_fv (f x : Nat) : forall n, (churchNumBind f x n).fv = {} := by
  intro n
  induction n with
  | zero =>
    simp [churchNumBind, Lam.fv]
  | succ n ih =>
    simp only [churchNumBind, Lam.fv, ih, Finset.union_empty, Finset.empty_union]
  ext y
  simp [Finset.mem_sdiff, Finset.mem_insert, Finset.mem_singleton]
  tauto

/-- Kleene shift `fun g h. h (g f)` with free `f = 1`. -/
def churchShift : Lam Nat :=
  Lam.abs 3 (Lam.abs 4 (Lam.app (Lam.var 4) (Lam.app (Lam.var 3) (Lam.var 1))))

/-- Kleene base `fun u. x` with free `x = 2`. -/
def churchPredBase : Lam Nat :=
  Lam.abs 3 (Lam.var 2)

/-- The identity combinator `fun id. id` used by Kleene `pred`. -/
def churchId : Lam Nat :=
  Lam.abs 3 (Lam.var 3)

theorem churchShift_fv : churchShift.fv = {1} := by
  change (({4} U ({3} U {1})) : Finset Nat) \ {4} \ {3} = {1}
  decide

theorem churchPredBase_fv : churchPredBase.fv = {2} := by
  simp [churchPredBase, Lam.fv]

theorem churchId_fv : churchId.fv = {} := by
  simp [churchId, Lam.fv]

def churchShiftIter : Nat -> Lam Nat
| 0 => churchPredBase
| n + 1 => churchShift.app (churchShiftIter n)

theorem churchShiftIter_eq_iter (n : Nat) :

```

```

    churchShiftIter n = churchIter n churchShift churchPredBase := by
induction n with
| zero => rfl
| succ n ih => simp [churchShiftIter, churchIter, ih]

theorem churchIter_var_not_mem (n a b z : Nat) (ha : z != a) (hb : z != b) :
  z notin (churchIter n (Lam.var a) (Lam.var b)).fv := by
  intro h
  have := churchIter_var_fv n a b h
  simp only [Finset.mem_insert, Finset.mem_singleton] at this
  exact this.elim ha hb

/-!
## Capture-avoiding substitution cases
-/

theorem substCA_abs_of_fresh (y x : Nat) (M N : Lam Nat) (hne : y != x)
  (hx : x notin M.fv) :
  Lam.substCA (Lam.abs y M) x N = Lam.abs y M := by
  rw [Lam.substCA_abs, if_neg hne, if_pos hx]

theorem substCA_abs_of_no_capture (y x : Nat) (M N : Lam Nat) (hne : y != x)
  (hx : x in M.fv) (hy : y notin N.fv) :
  Lam.substCA (Lam.abs y M) x N = Lam.abs y (Lam.substCA M x N) := by
  rw [Lam.substCA_abs, if_neg hne]
  have hx' : not x notin M.fv := fun h => h hx
  rw [if_neg hx', if_pos hy]

theorem substCA_abs_of_capture (y x : Nat) (M N : Lam Nat) (hne : y != x)
  (hx : x in M.fv) (hy : y in N.fv) :
  Lam.substCA (Lam.abs y M) x N =
    Lam.abs (Lam.pickFresh (M.vars U N.fv U {x, y}) y)
      (Lam.substCA (M.substNaive y (Lam.var (Lam.pickFresh (M.vars U N.fv U {x, y}) y)))
        x N) := by
  rw [Lam.substCA_abs, if_neg hne]
  have hx' : not x notin M.fv := fun h => h hx
  have hy' : not y notin N.fv := fun h => h hy
  rw [if_neg hx', if_neg hy']

/-!
## Definition 32(ii): Church `if`
-/

theorem substCA_true_body (M : Lam Nat) :
  Lam.substCA (Lam.abs 1 (Lam.var 0)) 0 M =
    if (1 : Nat) in M.fv then
      Lam.abs (Lam.pickFresh ((Lam.var 0).vars U M.fv U {0, 1}) 1) M
    else
      Lam.abs 1 M := by
  by_cases h1 : (1 : Nat) in M.fv
  * rw [if_pos h1]
  rw [substCA_abs_of_capture 1 0 (Lam.var 0) M Nat.one_ne_zero (by simp [Lam.fv]) h1]
  have h01 : (0 : Nat) != 1 := Nat.zero_ne_one
  simp [Lam.substNaive, h01, Lam.substCA_var]
  * rw [if_neg h1]
  rw [substCA_abs_of_no_capture 1 0 (Lam.var 0) M Nat.one_ne_zero (by simp [Lam.fv]) h1]
  simp [Lam.substCA_var]

theorem churchTrueN_app (M N : Lam Nat) :
  LamEq ((churchTrueN.app M).app N) M := by
  have hb : LamEq (churchTrueN.app M) (Lam.substCA (Lam.abs 1 (Lam.var 0)) 0 M) :=
    LamEq.beta 0 (Lam.abs 1 (Lam.var 0)) M
  refine (LamEq.app_left hb).trans ?_

```

```

rw [substCA_true_body]
by_cases h1 : (1 : Nat) in M.fv
* rw [if_pos h1]
  set z := Lam.pickFresh ((Lam.var 0).vars U M.fv U {0, 1}) 1
  have hz : z notin (Lam.var 0).vars U M.fv U {0, 1} :=
    Lam.pickFresh_not_mem _ 1
  have hzM : z notin M.fv := fun h => hz (by simp [Finset.mem_union, h])
  refine (LamEq.beta z M N).trans ?_
  rw [Lam.substCA_fresh N hzM]
  exact LamEq.refl M
* rw [if_neg h1]
  refine (LamEq.beta 1 M N).trans ?_
  rw [Lam.substCA_fresh N h1]
  exact LamEq.refl M

theorem churchFalseN_app (M N : Lam Nat) :
  LamEq ((churchFalseN.app M).app N) N := by
  have hb1 : LamEq (churchFalseN.app M) (Lam.abs 1 (Lam.var 1)) := by
    refine (LamEq.beta 0 (Lam.abs 1 (Lam.var 1)) M).trans ?_
    rw [Lam.substCA_fresh]
    * exact LamEq.refl _
    * simp [Lam.fv]
  refine (LamEq.app_left hb1).trans ?_
  refine (LamEq.beta 1 (Lam.var 1) N).trans ?_
  rw [Lam.substCA_var, if_pos rfl]
  exact LamEq.refl N

theorem substCA_if_cont_no_capture (B M : Lam Nat) (hB : B.fv = {})
  (h2 : (2 : Nat) notin M.fv) :
  Lam.substCA (Lam.abs 2 (Lam.app (Lam.app B (Lam.var 1)) (Lam.var 2))) 1 M =
  Lam.abs 2 (Lam.app (Lam.app B M) (Lam.var 2)) := by
  rw [substCA_abs_of_no_capture 2 1 _ M (by decide) (by simp [Lam.fv]) h2]
  simp [Lam.substCA_app, Lam.substCA_var, Lam.substCA_of_closed hB]

theorem substCA_if_cont_capture (B M : Lam Nat) (hB : B.fv = {})
  (h2 : (2 : Nat) in M.fv) :
  Lam.substCA (Lam.abs 2 (Lam.app (Lam.app B (Lam.var 1)) (Lam.var 2))) 1 M =
  Lam.abs
    (Lam.pickFresh
      ((Lam.app (Lam.app B (Lam.var 1)) (Lam.var 2)).vars U M.fv U {1, 2}) 2)
    (Lam.app (Lam.app B M)
      (Lam.var (Lam.pickFresh
        ((Lam.app (Lam.app B (Lam.var 1)) (Lam.var 2)).vars U M.fv U {1, 2}) 2))) := by
  rw [substCA_abs_of_capture 2 1 _ M (by decide) (by simp [Lam.fv]) h2]
  set z := Lam.pickFresh
    ((Lam.app (Lam.app B (Lam.var 1)) (Lam.var 2)).vars U M.fv U {1, 2}) 2
  have hz : z notin
    (Lam.app (Lam.app B (Lam.var 1)) (Lam.var 2)).vars U M.fv U {1, 2} :=
    Lam.pickFresh_not_mem _ 2
  have hz1 : z != 1 := fun h => hz (by simp [h])
  have hB2 : (2 : Nat) notin B.fv := by simp [hB]
  have hB1 : (1 : Nat) notin B.fv := by simp [hB]
  simp [Lam.substNaive, Lam.substCA_app, Lam.substCA_var, hz1,
    Lam.subst_fresh (N := Lam.var z) hB2, Lam.substCA_of_closed hB]

theorem churchIfN_reduce (B M N : Lam Nat) (hB : B.fv = {}) :
  LamEq (((churchIfN.app B).app M).app N) ((B.app M).app N) := by
  have hred : LamEq (churchIfN.app B)
    (Lam.abs 1 (Lam.abs 2 (Lam.app (Lam.app B (Lam.var 1)) (Lam.var 2)))) := by
    refine (LamEq.beta_closed 0 _ B hB).trans ?_
    simp [churchIfN, Lam.substNaive]
    exact LamEq.refl _
  refine (LamEq.app_left (LamEq.app_left hred)).trans ?_

```



```

have hbM : LamEq
  ((Lam.abs 1 (Lam.abs 2 (Lam.app (Lam.app B (Lam.var 1)) (Lam.var 2))))).app M)
  (Lam.substCA (Lam.abs 2 (Lam.app (Lam.app B (Lam.var 1)) (Lam.var 2))) 1 M) :=
  LamEq.beta 1 _ M
refine (LamEq.app_left hbM).trans ?_
by_cases h2 : (2 : Nat) in M.fv
* rw [substCA_if_cont_capture B M hB h2]
  set z := Lam.pickFresh
  ((Lam.app (Lam.app B (Lam.var 1)) (Lam.var 2)).vars U M.fv U {1, 2}) 2
  have hz : z notin
    (Lam.app (Lam.app B (Lam.var 1)) (Lam.var 2)).vars U M.fv U {1, 2} :=
    Lam.pickFresh_not_mem _ 2
  have hzM : z notin M.fv := fun h => hz (by simp [Finset.mem_union, h])
  have hzB : z notin B.fv := by simp [hB]
  refine (LamEq.beta z (Lam.app (Lam.app B M) (Lam.var z)) N).trans ?_
  simp [Lam.substCA_app, Lam.substCA_var, Lam.substCA_fresh (N := N) hzB,
    Lam.substCA_fresh (N := N) hzM]
  exact LamEq.refl _
* rw [substCA_if_cont_no_capture B M hB h2]
  refine (LamEq.beta 2 (Lam.app (Lam.app B M) (Lam.var 2)) N).trans ?_
  simp [Lam.substCA_app, Lam.substCA_var,
    Lam.substCA_fresh (N := N) (hB |> Finset.notMem_empty 2),
    Lam.substCA_fresh (N := N) h2]
  exact LamEq.refl _

theorem churchIfN_true (M N : Lam Nat) :
  LamEq (((churchIfN.app churchTrueN).app M).app N) M :=
  (churchIfN_reduce churchTrueN M N churchTrueN_fv).trans (churchTrueN_app M N)

theorem churchIfN_false (M N : Lam Nat) :
  LamEq (((churchIfN.app churchFalseN).app M).app N) N :=
  (churchIfN_reduce churchFalseN M N churchFalseN_fv).trans (churchFalseN_app M N)

/-!
## Definition 32(iii): successor
-/

```

Lean 4 source (lines 801–1200)

```

theorem churchNumN_lamEq_iter (n : Nat) :
  LamEq (churchNumN n)
  (Lam.abs 0 (Lam.abs 1 (churchIter n (Lam.var 0) (Lam.var 1)))) := by
  induction n with
  | zero =>
    simp [churchNumN, churchIter]
    exact LamEq.refl _
  | succ n ih =>
    have hbody : LamEq
      (Lam.app (Lam.app (churchNumN n) (Lam.var 0)) (Lam.var 1))
      (churchIter n (Lam.var 0) (Lam.var 1)) := by
      refine (LamEq.app_left (LamEq.app_left ih)).trans ?_
    have h1 : LamEq
      ((Lam.abs 0 (Lam.abs 1 (churchIter n (Lam.var 0) (Lam.var 1))))).app
      (Lam.var 0))
      (Lam.abs 1 (churchIter n (Lam.var 0) (Lam.var 1))) := by
      refine (LamEq.beta 0 _ (Lam.var 0)).trans ?_
    rw [Lam.substCA_abs]
    have hne : (1 : Nat) != 0 := Nat.one_ne_zero
    rw [if_neg hne]
    by_cases hx : (0 : Nat) notin (churchIter n (Lam.var 0) (Lam.var 1)).fv
    * rw [if_pos hx]
      exact LamEq.refl _
    * have hy : (1 : Nat) notin (Lam.var 0).fv := by simp [Lam.fv]

```

```

    rw [if_neg hx, if_pos hy, Lam.substCA_self]
    exact LamEq.refl _
  refine (LamEq.app_left h1).trans ?_
  refine (LamEq.beta 1 (churchIter n (Lam.var 0) (Lam.var 1)) (Lam.var 1)).trans ?_
  rw [Lam.substCA_self]
  exact LamEq.refl _
exact LamEq.xi 0 (LamEq.xi 1 (LamEq.app_right hbody))

theorem churchNumN_fresh (n : Nat) :
  LamEq (churchNumN n) (churchNumBind 5 6 n) := by
  induction n with
  | zero =>
    have h1 : LamEq (Lam.abs 0 (Lam.abs 1 (Lam.var 1)))
      (Lam.abs 5 (Lam.substCA (Lam.abs 1 (Lam.var 1)) 0 (Lam.var 5))) :=
      LamEq.alpha 0 5 (Lam.abs 1 (Lam.var 1)) (by simp [Lam.fv])
    have hsub1 : Lam.substCA (Lam.abs 1 (Lam.var 1)) 0 (Lam.var 5) =
      Lam.abs 1 (Lam.var 1) :=
      Lam.substCA_fresh _ (by simp [Lam.fv])
    rw [hsub1] at h1
    refine h1.trans ?_
    have h2 : LamEq (Lam.abs 1 (Lam.var 1))
      (Lam.abs 6 (Lam.substCA (Lam.var 1) 1 (Lam.var 6))) :=
      LamEq.alpha 1 6 (Lam.var 1) (by simp [Lam.fv])
    have hsub2 : Lam.substCA (Lam.var 1) 1 (Lam.var 6) = Lam.var 6 := by
      simp [Lam.substCA_var]
    rw [hsub2] at h2
    exact LamEq.xi 5 h2
  | succ n ih =>
    have hcong : LamEq
      (Lam.abs 0 (Lam.abs 1 (Lam.app (Lam.var 0)
        (Lam.app (Lam.app (churchNumN n) (Lam.var 0)) (Lam.var 1)))))
      (Lam.abs 0 (Lam.abs 1 (Lam.app (Lam.var 0)
        (Lam.app (Lam.app (churchNumBind 5 6 n) (Lam.var 0)) (Lam.var 1))))) :=
      LamEq.xi 0 (LamEq.xi 1 (LamEq.app_right (LamEq.app_left (LamEq.app_left ih))))
    refine hcong.trans ?_
    have ha1 : (5 : Nat) notin
      (Lam.abs 1 (Lam.app (Lam.var 0)
        (Lam.app (Lam.app (churchNumBind 5 6 n) (Lam.var 0)) (Lam.var 1))))
      .fv := by
      simp [Lam.fv, churchNumBind_fv]
    refine (LamEq.alpha 0 5 _ ha1).trans ?_
    have hsub :
      Lam.substCA
        (Lam.abs 1 (Lam.app (Lam.var 0)
          (Lam.app (Lam.app (churchNumBind 5 6 n) (Lam.var 0)) (Lam.var 1))))
        0 (Lam.var 5) =
      Lam.abs 1 (Lam.app (Lam.var 5)
        (Lam.app (Lam.app (churchNumBind 5 6 n) (Lam.var 5)) (Lam.var 1))) := by
      rw [substCA_abs_of_no_capture 1 0 _ (Lam.var 5) Nat.one_ne_zero
        (by simp [Lam.fv, churchNumBind_fv]) (by simp [Lam.fv])]
      simp [Lam.substCA_app, Lam.substCA_var,
        Lam.substCA_of_closed (churchNumBind_fv 5 6 n)]
    rw [hsub]
    have ha2 : (6 : Nat) notin
      (Lam.app (Lam.var 5)
        (Lam.app (Lam.app (churchNumBind 5 6 n) (Lam.var 5)) (Lam.var 1)))
      .fv := by
      simp [Lam.fv, churchNumBind_fv]
    refine (LamEq.xi 5 (LamEq.alpha 1 6 _ ha2)).trans ?_
    have hsub2 :
      Lam.substCA
        (Lam.app (Lam.var 5)
          (Lam.app (Lam.app (churchNumBind 5 6 n) (Lam.var 5)) (Lam.var 1)))
        1 (Lam.var 6) =
      Lam.app (Lam.var 5)

```

```

      (Lam.app (Lam.app (churchNumBind 5 6 n) (Lam.var 5)) (Lam.var 6)) := by
    simp [Lam.substCA_app, Lam.substCA_var,
      Lam.substCA_of_closed (churchNumBind_fv 5 6 n)]
    rw [hsub2]
    exact LamEq.refl _

theorem churchNumBind_iter (n : Nat) (F X : Lam Nat) (hF : 6 notin F.fv) :
  LamEq ((churchNumBind 5 6 n).app F |>.app X) (churchIter n F X) := by
  induction n with
  | zero =>
    have h1 : LamEq ((churchNumBind 5 6 0).app F) (Lam.abs 6 (Lam.var 6)) := by
      refine (LamEq.beta 5 (Lam.abs 6 (Lam.var 6)) F).trans ?_
      rw [Lam.substCA_fresh]
      * exact LamEq.refl _
      * simp [Lam.fv]
    refine (LamEq.app_left h1).trans ?_
    refine (LamEq.beta 6 (Lam.var 6) X).trans ?_
    rw [Lam.substCA_var, if_pos rfl]
    exact LamEq.refl _
  | succ n ih =>
    have hc : (churchNumBind 5 6 n).fv = {} := churchNumBind_fv 5 6 n
    have h1 : LamEq ((churchNumBind 5 6 (n + 1)).app F)
      (Lam.abs 6 (Lam.app F (Lam.app (Lam.app (churchNumBind 5 6 n) F)
        (Lam.var 6)))) := by
      refine (LamEq.beta 5 _ F).trans ?_
      rw [substCA_abs_of_no_capture 6 5 _ F (by decide)
        (by simp [Lam.fv, hc]) hF]
      simp [Lam.substCA_app, Lam.substCA_var, Lam.substCA_of_closed hc]
      exact LamEq.refl _
    refine (LamEq.app_left h1).trans ?_
    refine (LamEq.beta 6 _ X).trans ?_
    have hbody :
      Lam.substCA
        (Lam.app F (Lam.app (Lam.app (churchNumBind 5 6 n) F) (Lam.var 6))) 6 X =
      F.app ((churchNumBind 5 6 n).app F |>.app X) := by
      simp [Lam.substCA_app, Lam.substCA_var, Lam.substCA_fresh (N := X) hF,
        Lam.substCA_of_closed hc]
    rw [hbody]
    exact LamEq.app_right ih

theorem churchSucc_app_num (n : Nat) :
  LamEq (churchSucc.app (churchNumN n))
    (Lam.abs 1 (Lam.abs 2
      (Lam.app (Lam.var 1)
        (Lam.app (Lam.app (churchNumN n) (Lam.var 1)) (Lam.var 2))))) := by
  refine (LamEq.beta_closed 0 _ (churchNumN n) (churchNumN_fv n)).trans ?_
  simp [churchSucc, Lam.substNaive]
  exact LamEq.refl _

theorem churchSucc_num (n : Nat) :
  LamEq (churchSucc.app (churchNumN n)) (churchNumN (n + 1)) := by
  refine (churchSucc_app_num n).trans ?_
  have ha1 : (0 : Nat) notin
    (Lam.abs 2 (Lam.app (Lam.var 1)
      (Lam.app (Lam.app (churchNumN n) (Lam.var 1)) (Lam.var 2))))
    .fv := by
    simp [Lam.fv, churchNumN_fv]
  refine (LamEq.alpha 1 0 _ ha1).trans ?_
  have hsub1 :
    Lam.substCA
      (Lam.abs 2 (Lam.app (Lam.var 1)
        (Lam.app (Lam.app (churchNumN n) (Lam.var 1)) (Lam.var 2))))
      1 (Lam.var 0) =
    Lam.abs 2 (Lam.app (Lam.var 0))

```

```

      (Lam.app (Lam.app (churchNumN n) (Lam.var 0)) (Lam.var 2))) := by
    rw [substCA_abs_of_no_capture 2 1 _ (Lam.var 0) (by decide)
      (by simp [Lam.fv, churchNumN_fv]) (by simp [Lam.fv])]
    simp [Lam.substCA_app, Lam.substCA_var, Lam.substCA_of_closed (churchNumN_fv n)]
  rw [hsub1]
  have ha2 : (1 : Nat) notin
    (Lam.app (Lam.var 0)
      (Lam.app (Lam.app (churchNumN n) (Lam.var 0)) (Lam.var 2))).fv := by
    simp [Lam.fv, churchNumN_fv]
  refine (LamEq.xi 0 (LamEq.alpha 2 1 _ ha2)).trans ?_
  have hsub2 :
    Lam.substCA
      (Lam.app (Lam.var 0)
        (Lam.app (Lam.app (churchNumN n) (Lam.var 0)) (Lam.var 2)))
      2 (Lam.var 1) =
    Lam.app (Lam.var 0)
      (Lam.app (Lam.app (churchNumN n) (Lam.var 0)) (Lam.var 1)) := by
    simp [Lam.substCA_app, Lam.substCA_var, Lam.substCA_of_closed (churchNumN_fv n)]
  rw [hsub2]
  exact LamEq.refl _

/-!
## Definition 32(iv): zero test
-/

theorem churchTrueN'_lamEq : LamEq churchTrueN' churchTrueN := by
  have ha1 : (0 : Nat) notin (Lam.abs 2 (Lam.var 1)).fv := by simp [Lam.fv]
  refine (LamEq.alpha 1 0 (Lam.abs 2 (Lam.var 1)) ha1).trans ?_
  have hsub1 : Lam.substCA (Lam.abs 2 (Lam.var 1)) 1 (Lam.var 0) =
    Lam.abs 2 (Lam.var 0) := by
    rw [substCA_abs_of_no_capture 2 1 (Lam.var 1) (Lam.var 0) (by decide)
      (by simp [Lam.fv]) (by simp [Lam.fv])]
    simp [Lam.substCA_var]
  rw [hsub1]
  have ha2 : (1 : Nat) notin (Lam.var 0).fv := by simp [Lam.fv]
  refine (LamEq.xi 0 (LamEq.alpha 2 1 (Lam.var 0) ha2)).trans ?_
  simp [Lam.substCA_var, churchTrueN]
  exact LamEq.refl _

theorem churchFalseN'_lamEq : LamEq churchFalseN' churchFalseN := by
  have ha1 : (0 : Nat) notin (Lam.abs 2 (Lam.var 2)).fv := by simp [Lam.fv]
  refine (LamEq.alpha 1 0 (Lam.abs 2 (Lam.var 2)) ha1).trans ?_
  have hsub1 : Lam.substCA (Lam.abs 2 (Lam.var 2)) 1 (Lam.var 0) =
    Lam.abs 2 (Lam.var 2) :=
    Lam.substCA_fresh _ (by simp [Lam.fv])
  rw [hsub1]
  have ha2 : (1 : Nat) notin (Lam.var 2).fv := by simp [Lam.fv]
  refine (LamEq.xi 0 (LamEq.alpha 2 1 (Lam.var 2) ha2)).trans ?_
  simp [Lam.substCA_var, churchFalseN]
  exact LamEq.refl _

theorem churchIsZero_app (n : Nat) :
  LamEq (churchIsZero.app (churchNumN n))
    (((churchNumN n).app (Lam.abs 1 churchFalseN')).app churchTrueN') := by
  refine (lamEq_beta_closed 0 _ (churchNumN n) (churchNumN_fv n)).trans ?_
  simp [churchIsZero, Lam.substNaive]
  exact LamEq.refl _

theorem churchIsZero_zero :
  LamEq (churchIsZero.app (churchNumN 0)) churchTrueN := by
  refine (churchIsZero_app 0).trans ?_
  have h1 : LamEq ((churchNumN 0).app (Lam.abs 1 churchFalseN'))
    (Lam.abs 1 (Lam.var 1)) := by

```

```

    refine (LamEq.beta 0 (Lam.abs 1 (Lam.var 1)) _).trans ?_
    rw [Lam.substCA_fresh]
    * exact LamEq.refl _
    * simp [Lam.fv]
  refine (LamEq.app_left h1).trans ?_
  refine (LamEq.beta 1 (Lam.var 1) churchTrueN').trans ?_
  rw [Lam.substCA_var, if_pos rfl]
  exact churchTrueN'_lamEq

theorem churchIsZero_succ (n : Nat) :
  LamEq (churchIsZero.app (churchNumN (n + 1))) churchFalseN := by
  refine (churchIsZero.app (n + 1)).trans ?_
  have hF : (Lam.abs 1 churchFalseN').fv = {} := by
    simp [Lam.fv, churchFalseN'_fv]
  have h1 : LamEq ((churchNumN (n + 1)).app (Lam.abs 1 churchFalseN'))
    (Lam.abs 1 (Lam.app (Lam.abs 1 churchFalseN')
      (Lam.app (Lam.app (churchNumN n) (Lam.abs 1 churchFalseN')) (Lam.var 1)))) := by
    refine (lamEq_beta_closed 0 _ (Lam.abs 1 churchFalseN') hF).trans ?_
    simp [Lam.substNaive]
  have hfresh :
    (churchNumN n).substNaive 0 (Lam.abs 1 churchFalseN') = churchNumN n :=
    Lam.subst_fresh (Lam.abs 1 churchFalseN') (by simp [churchNumN_fv n])
  rw [hfresh]
  exact LamEq.refl _
  refine (LamEq.app_left h1).trans ?_
  refine (lamEq_beta_closed 1 _ churchTrueN' churchTrueN'_fv).trans ?_
  have hbody :
    (Lam.app (Lam.abs 1 churchFalseN')
      (Lam.app (Lam.app (churchNumN n) (Lam.abs 1 churchFalseN'))
        (Lam.var 1))).substNaive 1 churchTrueN' =
    (Lam.abs 1 churchFalseN').app
      ((churchNumN n).app (Lam.abs 1 churchFalseN') |>.app churchTrueN') := by
    simp [Lam.substNaive]
  exact Lam.subst_fresh churchTrueN' (by simp [churchNumN_fv n])
  rw [hbody]
  have hFapp : LamEq
    ((Lam.abs 1 churchFalseN').app
      ((churchNumN n).app (Lam.abs 1 churchFalseN') |>.app churchTrueN'))
    churchFalseN' := by
    refine (LamEq.beta 1 churchFalseN' _).trans ?_
    rw [Lam.substCA_fresh]
    * exact LamEq.refl _
    * simp [churchFalseN'_fv]
  exact hFapp.trans churchFalseN'_lamEq

/-!
## Definition 32(iii): predecessor
-/

theorem churchShift_app (G : Lam Nat) (hG : 4 notin G.fv) :
  LamEq (churchShift.app G)
    (Lam.abs 4 (Lam.app (Lam.var 4) (Lam.app G (Lam.var 1)))) := by
  refine (LamEq.beta 3
    (Lam.abs 4 (Lam.app (Lam.var 4) (Lam.app (Lam.var 3) (Lam.var 1)))) G).trans ?_
  rw [substCA_abs_of_no_capture 4 3 _ G (by decide) (by simp [Lam.fv]) hG]
  simp [Lam.substCA_app, Lam.substCA_var]
  exact LamEq.refl _

theorem churchShiftIter_succ_form (n : Nat) :
  LamEq (churchShiftIter (n + 1))
    (Lam.abs 4 (Lam.app (Lam.var 4) (churchIter n (Lam.var 1) (Lam.var 2)))) := by
  induction n with
  | zero =>

```

```

have h4 : (4 : Nat) notin churchPredBase.fv := by simp [churchPredBase_fv]
refine (churchShift_app churchPredBase h4).trans ?_
have hb : LamEq (churchPredBase.app (Lam.var 1)) (Lam.var 2) := by
  refine (LamEq.beta 3 (Lam.var 2) (Lam.var 1)).trans ?_
  simp [Lam.substCA_var]
  exact LamEq.refl _
exact LamEq.xi 4 (LamEq.app_right hb)
| succ n ih =>
  refine (LamEq.app_right ih).trans ?_
  let W := churchIter n (Lam.var 1) (Lam.var 2)
  let G := Lam.abs 4 (Lam.app (Lam.var 4) W)
  have hG : (4 : Nat) notin G.fv := by simp [G, Lam.fv]
  refine (churchShift_app G hG).trans ?_
  have hW4 : (4 : Nat) notin W.fv :=
    churchIter_var_not_mem n 1 2 4 (by decide) (by decide)
  have hb : LamEq (G.app (Lam.var 1)) (Lam.app (Lam.var 1) W) := by
    refine (LamEq.beta 4 (Lam.app (Lam.var 4) W) (Lam.var 1)).trans ?_
    simp [Lam.substCA_app, Lam.substCA_var, Lam.substCA_fresh (N := Lam.var 1) hW4]
    exact LamEq.refl _
  exact LamEq.xi 4 (LamEq.app_right hb)

theorem churchShiftIter_zero_app_id :
  LamEq (churchShiftIter 0 |>.app churchId) (Lam.var 2) := by
  change LamEq (churchPredBase.app churchId) (Lam.var 2)
  refine (LamEq.beta 3 (Lam.var 2) churchId).trans ?_
  simp [Lam.substCA_var]
  exact LamEq.refl _

theorem churchShiftIter_succ_app_id (n : Nat) :
  LamEq (churchShiftIter (n + 1) |>.app churchId)
    (churchIter n (Lam.var 1) (Lam.var 2)) := by
  refine (LamEq.app_left (churchShiftIter_succ_form n)).trans ?_
  let W := churchIter n (Lam.var 1) (Lam.var 2)
  have hW4 : (4 : Nat) notin W.fv :=
    churchIter_var_not_mem n 1 2 4 (by decide) (by decide)
  refine (lamEq_beta_closed 4 (Lam.app (Lam.var 4) W) churchId churchId_fv).trans ?_
  have hsub : (Lam.app (Lam.var 4) W).substNaive 4 churchId = churchId.app W := by
    simp [Lam.substNaive, Lam.subst_fresh (N := churchId) hW4]
  rw [hsub]
  refine (LamEq.beta 3 (Lam.var 3) W).trans ?_
  simp [Lam.substCA_var]
  exact LamEq.refl _

theorem churchPred_app_num (n : Nat) :
  LamEq (churchPred.app (churchNumN n))
    (Lam.abs 1 (Lam.abs 2
      (Lam.app (Lam.app (Lam.app (churchNumN n) churchShift) churchPredBase)
        churchId))) := by
  have hdef : churchPred =
    Lam.abs 0 (Lam.abs 1 (Lam.abs 2
      (Lam.app (Lam.app (Lam.app (Lam.var 0) churchShift) churchPredBase) churchId))) :=
    rfl
  rw [hdef]
  refine (lamEq_beta_closed 0 _ (churchNumN n) (churchNumN_fv n)).trans ?_
  simp [Lam.substNaive, churchShift_fv, churchPredBase_fv, churchId_fv]
  exact LamEq.refl _

theorem churchNumN_renamed (n : Nat) :
  LamEq (Lam.abs 1 (Lam.abs 2 (churchIter n (Lam.var 1) (Lam.var 2))))
    (churchNumN n) := by
  have ha1 : (0 : Nat) notin (Lam.abs 2 (churchIter n (Lam.var 1) (Lam.var 2))).fv := by
    intro h
  simp [Lam.fv] at h

```

```

    exact churchIter_var_not_mem n 1 2 0 (by decide) (by decide) h
  refine (LamEq.alpha 1 0 _ ha1).trans ?_
  have hsub1 :
    Lam.substCA (Lam.abs 2 (churchIter n (Lam.var 1) (Lam.var 2))) 1 (Lam.var 0) =
      Lam.abs 2 (churchIter n (Lam.var 0) (Lam.var 2)) := by
    rw [Lam.substCA_abs]
    have hne : (2 : Nat) != 1 := by decide
    rw [if_neg hne]
    by_cases hx : (1 : Nat) notin (churchIter n (Lam.var 1) (Lam.var 2)).fv
    * rw [if_pos hx]
      have h1 := Lam.substCA_fresh (N := Lam.var 0) hx
      have h2 := substCA_churchIter n (Lam.var 1) (Lam.var 2) 1 (Lam.var 0)
      simp [Lam.substCA_var] at h2
      exact congrArg (Lam.abs 2) (h1.symm.trans h2)
    * have hy : (2 : Nat) notin (Lam.var 0).fv := by simp [Lam.fv]
      rw [if_neg hx, if_pos hy, substCA_churchIter]
      simp [Lam.substCA_var]
  rw [hsub1]
  have ha2 : (1 : Nat) notin (churchIter n (Lam.var 0) (Lam.var 2)).fv :=
    churchIter_var_not_mem n 0 2 1 (by decide) (by decide)
  refine (LamEq.xi 0 (LamEq.alpha 2 1 _ ha2)).trans ?_
  have hsub2 :
    Lam.substCA (churchIter n (Lam.var 0) (Lam.var 2)) 2 (Lam.var 1) =
      churchIter n (Lam.var 0) (Lam.var 1) := by
    rw [substCA_churchIter]
    simp [Lam.substCA_var]
  rw [hsub2]
  exact (churchNumN_lamEq_iter n).symm

theorem churchPred_zero :
  LamEq (churchPred.app (churchNumN 0)) (churchNumN 0) := by
  refine (churchPred_app_num 0).trans ?_
  have h1 : LamEq (((churchNumN 0).app churchShift) (Lam.abs 1 (Lam.var 1))) := by
    refine (LamEq.beta 0 (Lam.abs 1 (Lam.var 1)) churchShift).trans ?_
    rw [Lam.substCA_fresh]
    * exact LamEq.refl _
    * simp [Lam.fv]
  have h2 : LamEq (((churchNumN 0).app churchShift).app churchPredBase)
    churchPredBase := by
    refine (LamEq.app_left h1).trans ?_
    refine (LamEq.beta 1 (Lam.var 1) churchPredBase).trans ?_
    simp [Lam.substCA_var]
    exact LamEq.refl _
  have h3 : LamEq
    (((churchNumN 0).app churchShift).app churchPredBase).app churchId
    (Lam.var 2) :=
    (LamEq.app_left h2).trans churchShiftIter_zero_app_id
  refine (LamEq.xi 1 (LamEq.xi 2 h3)).trans ?_
  have ha1 : (0 : Nat) notin (Lam.abs 2 (Lam.var 2)).fv := by simp [Lam.fv]
  refine (LamEq.alpha 1 0 _ ha1).trans ?_
  rw [Lam.substCA_fresh _ (by simp [Lam.fv])]
  have ha2 : (1 : Nat) notin (Lam.var 2).fv := by simp [Lam.fv]
  refine (LamEq.xi 0 (LamEq.alpha 2 1 _ ha2)).trans ?_
  simp [Lam.substCA_var, churchNumN]
  exact LamEq.refl _

theorem churchPred_succ (n : Nat) :
  LamEq (churchPred.app (churchNumN (n + 1))) (churchNumN n) := by
  refine (churchPred_app_num (n + 1)).trans ?_
  have h6 : (6 : Nat) notin churchShift.fv := by simp [churchShift_fv]

```

Lean 4 source (lines 1201–1402)

```

have hiter : LamEq

```

```

      (((churchNumN (n + 1)).app churchShift).app churchPredBase)
      (churchShiftIter (n + 1)) := by
    have h := churchNumBind_iter (n + 1) churchShift churchPredBase h6
    rw [churchShiftIter_eq_iter]
    exact (LamEq.app_congr (LamEq.app_left (churchNumN_fresh (n + 1)))
      (LamEq.refl churchPredBase)).trans h
  have hbody : LamEq
    (((churchNumN (n + 1)).app churchShift).app churchPredBase).app churchId
    (churchIter n (Lam.var 1) (Lam.var 2)) :=
    (LamEq.app_left hiter).trans (churchShiftIter_succ_app_id n)
    exact (LamEq.xi 1 (LamEq.xi 2 hbody)).trans (churchNumN_renamed n)

/-- Definition 32: Church Booleans/numerals and combinators are closed and
satisfy the paper's `fun |- ` identities (ii)-(iv). Distinctness (i) is
semantic and lives in `Interp`. -/
theorem definition_32 :
  churchTrueN.fv = {} /\ churchFalseN.fv = {} /\ (forall n, (churchNumN n).fv = {}) /\
  churchIfN.fv = {} /\ churchSucc.fv = {} /\ churchPred.fv = {} /\ churchIsZero.fv = {}
  /\
  (forall M N : Lam Nat, LamEq (((churchIfN.app churchTrueN).app M).app N) M) /\
  (forall M N : Lam Nat, LamEq (((churchIfN.app churchFalseN).app M).app N) N) /\
  (forall n, LamEq (churchSucc.app (churchNumN n)) (churchNumN (n + 1))) /\
  (forall n, LamEq (churchPred.app (churchNumN (n + 1))) (churchNumN n)) /\
  LamEq (churchPred.app (churchNumN 0)) (churchNumN 0) /\
  LamEq (churchIsZero.app (churchNumN 0)) churchTrueN /\
  (forall n, LamEq (churchIsZero.app (churchNumN (n + 1))) churchFalseN) :=
<churchTrueN_fv, churchFalseN_fv, churchNumN_fv,
  churchIfN_fv, churchSucc_fv, churchPred_fv, churchIsZero_fv,
  churchIfN_true, churchIfN_false, churchSucc_num, churchPred_succ,
  churchPred_zero, churchIsZero_zero, churchIsZero_succ>

/-!
## Lemma 35(i) combinators: negation and `m?`

Paper: `not` is Church negation, `!? = fun m. if (0? m) False (0? (pred m))`,
and `n? = fun m. (n-1)? (pred m)` for `n >= 2`. `0?` is `churchIsZero`.
These stay on `Nat`; `churchNot` on `Fin 2` is unchanged.
-/

/-- Church negation `fun b. b False top` on `Nat`. -/
def churchNotN : Lam Nat :=
  Lam.abs 0 (((Lam.var 0).app churchFalseN).app churchTrueN)

theorem churchNotN_fv : churchNotN.fv = {} := by
  simp [churchNotN, churchFalseN_fv, churchTrueN_fv, Lam.fv]

theorem churchNotN_true :
  LamEq (churchNotN.app churchTrueN) churchFalseN := by
  refine (lamEq_beta_closed 0 _ churchTrueN churchTrueN_fv).trans ?_
  have hF : churchFalseN.substNaive 0 churchTrueN = churchFalseN :=
    Lam.subst_fresh churchTrueN (by simp [churchFalseN_fv])
  have hT : churchTrueN.substNaive 0 churchTrueN = churchTrueN :=
    Lam.subst_fresh churchTrueN (by simp [churchTrueN_fv])
  simp [Lam.substNaive, hF, hT]
  exact churchTrueN_app churchFalseN churchTrueN

theorem churchNotN_false :
  LamEq (churchNotN.app churchFalseN) churchTrueN := by
  refine (lamEq_beta_closed 0 _ churchFalseN churchFalseN_fv).trans ?_
  have hF : churchFalseN.substNaive 0 churchFalseN = churchFalseN :=
    Lam.subst_fresh churchFalseN (by simp [churchFalseN_fv])
  have hT : churchTrueN.substNaive 0 churchFalseN = churchTrueN :=
    Lam.subst_fresh churchFalseN (by simp [churchTrueN_fv])

```



```

simp [Lam.substNaive, hF, hT]
exact churchFalseN_app churchFalseN churchTrueN

/-- Paper `m?` is `churchIsZero`; `1?` and `n?` ( $n \geq 2$ ) follow the
paper's closed-term recurrences. Binder `0` is free only in the applied
argument; the combinators are closed. -/
def churchTest : Nat → Lam Nat
| 0 => churchIsZero
| 1 =>
  Lam.abs 0
    (((churchIfN.app (churchIsZero.app (Lam.var 0))).app churchFalseN).app
      (churchIsZero.app (churchPred.app (Lam.var 0))))
| n + 2 =>
  Lam.abs 0 ((churchTest (n + 1)).app (churchPred.app (Lam.var 0)))

theorem churchTest_fv : forall m, (churchTest m).fv = {}
| 0 => churchIsZero_fv
| 1 => by
  simp [churchTest, churchIfN_fv, churchIsZero_fv, churchFalseN_fv,
    churchPred_fv, Lam.fv]
| n + 2 => by
  simp [churchTest, churchTest_fv (n + 1), churchPred_fv, Lam.fv]

theorem churchTest_one_app (N : Lam Nat) (hN : N.fv = {}) :
  LamEq ((churchTest 1).app N)
    (((churchIfN.app (churchIsZero.app N)).app churchFalseN).app
      (churchIsZero.app (churchPred.app N))) := by
  refine (lamEq_beta_closed 0 _ N hN).trans ?_
  have hIf : churchIfN.substNaive 0 N = churchIfN :=
    Lam.subst_fresh N (by simp [churchIfN_fv])
  have hZ : churchIsZero.substNaive 0 N = churchIsZero :=
    Lam.subst_fresh N (by simp [churchIsZero_fv])
  have hF : churchFalseN.substNaive 0 N = churchFalseN :=
    Lam.subst_fresh N (by simp [churchFalseN_fv])
  have hP : churchPred.substNaive 0 N = churchPred :=
    Lam.subst_fresh N (by simp [churchPred_fv])
  simp [Lam.substNaive, hIf, hZ, hF, hP]
  exact LamEq.refl _

theorem churchTest_succ_app (m : Nat) (N : Lam Nat) (hN : N.fv = {}) :
  LamEq ((churchTest (m + 2)).app N)
    ((churchTest (m + 1)).app (churchPred.app N)) := by
  refine (lamEq_beta_closed 0 _ N hN).trans ?_
  have hT : (churchTest (m + 1)).substNaive 0 N = churchTest (m + 1) :=
    Lam.subst_fresh N (by simp [churchTest_fv (m + 1)])
  have hP : churchPred.substNaive 0 N = churchPred :=
    Lam.subst_fresh N (by simp [churchPred_fv])
  simp [Lam.substNaive, hT, hP]
  exact LamEq.refl _

theorem churchTest_num : forall m n : Nat,
  LamEq ((churchTest m).app (churchNumN n))
    (if n = m then churchTrueN else churchFalseN)
| 0, n => by
  change LamEq (churchIsZero.app (churchNumN n))
    (if n = 0 then churchTrueN else churchFalseN)
  by_cases hn : n = 0
  * subst hn
    simp using churchIsZero_zero
  * obtain <k, rfl> := Nat.exists_eq_succ_of_ne_zero hn
    simp using churchIsZero_succ k
| 1, n => by
  refine (churchTest_one_app (churchNumN n) (churchNumN_fv n)).trans ?_

```

```

match n with
| 0 =>
  have hif : LamEq
    (((churchIfN.app (churchIsZero.app (churchNumN 0))).app churchFalseN).app
      (churchIsZero.app (churchPred.app (churchNumN 0))))
    (((churchIfN.app churchTrueN).app churchFalseN).app
      (churchIsZero.app (churchPred.app (churchNumN 0)))) :=
    LamEq.app_left (LamEq.app_left (LamEq.app_right churchIsZero_zero))
  refine hif.trans ?_
  simpa using churchIfN_true churchFalseN
    (churchIsZero.app (churchPred.app (churchNumN 0)))
| 1 =>
  have hZ : LamEq (churchIsZero.app (churchNumN 1)) churchFalseN :=
    churchIsZero_succ 0
  have hif : LamEq
    (((churchIfN.app (churchIsZero.app (churchNumN 1))).app churchFalseN).app
      (churchIsZero.app (churchPred.app (churchNumN 1))))
    (((churchIfN.app churchFalseN).app churchFalseN).app
      (churchIsZero.app (churchPred.app (churchNumN 1)))) :=
    LamEq.app_left (LamEq.app_left (LamEq.app_right hZ))
  refine hif.trans ?_
  have helse : LamEq
    (((churchIfN.app churchFalseN).app churchFalseN).app
      (churchIsZero.app (churchPred.app (churchNumN 1))))
    (churchIsZero.app (churchPred.app (churchNumN 1))) :=
    churchIfN_false churchFalseN (churchIsZero.app (churchPred.app (churchNumN 1)))
  refine helse.trans ?_
  have hp : LamEq (churchPred.app (churchNumN 1)) (churchNumN 0) :=
    churchPred_succ 0
  exact (LamEq.app_right hp).trans churchIsZero_zero
| k + 2 =>
  have hZ : LamEq (churchIsZero.app (churchNumN (k + 2))) churchFalseN :=
    churchIsZero_succ (k + 1)
  have hif : LamEq
    (((churchIfN.app (churchIsZero.app (churchNumN (k + 2)))).app
      churchFalseN).app
      (churchIsZero.app (churchPred.app (churchNumN (k + 2)))))
    (((churchIfN.app churchFalseN).app churchFalseN).app
      (churchIsZero.app (churchPred.app (churchNumN (k + 2))))) :=
    LamEq.app_left (LamEq.app_left (LamEq.app_right hZ))
  refine hif.trans ?_
  have helse : LamEq
    (((churchIfN.app churchFalseN).app churchFalseN).app
      (churchIsZero.app (churchPred.app (churchNumN (k + 2)))))
    (churchIsZero.app (churchPred.app (churchNumN (k + 2)))) :=
    churchIfN_false churchFalseN
      (churchIsZero.app (churchPred.app (churchNumN (k + 2))))
  refine helse.trans ?_
  have hp : LamEq (churchPred.app (churchNumN (k + 2))) (churchNumN (k + 1)) :=
    churchPred_succ (k + 1)
  exact (LamEq.app_right hp).trans (churchIsZero_succ k)
| m + 2, n => by
  refine (churchTest_succ_app m (churchNumN n) (churchNumN_fv n)).trans ?_
  match n with
  | 0 =>
    have hp : LamEq (churchPred.app (churchNumN 0)) (churchNumN 0) :=
      churchPred_zero
    refine (LamEq.app_right hp).trans ?_
    have ih := churchTest_num (m + 1) 0
    have hne : not (0 = m + 1) := (Nat.succ_ne_zero m).symm
    have hne' : not (0 = m + 2) := (Nat.succ_ne_zero (m + 1)).symm
    simpa [hne, hne'] using ih
  | j + 1 =>

```

```

have hp : LamEq (churchPred.app (churchNumN (j + 1))) (churchNumN j) :=
  churchPred_succ j
refine (LamEq.app_right hp).trans ?_
have ih := churchTest_num (m + 1) j
by_cases hj : j = m + 1
* subst hj
  simpa using ih
* have hj' : not (j + 1 = m + 2) := by
  intro h
  exact hj (Nat.succ_injective h)
  simpa [hj, hj'] using ih
end Scott2026

```

A.17 Scott2026/Interp.lean

1162 lines.

Lean 4 source (lines 1–400)

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/

import Mathlib.Data.Finset.Basic
import Mathlib.Data.Finset.Sort
import Mathlib.Data.Fintype.EquivFin
import Mathlib.Data.Nat.Pairing
import Mathlib.Logic.Function.Basic
import Mathlib.Order.Bounds.Image
import Mathlib.Order.CompleteLattice.Basic
import Scott2026.Domain
import Scott2026.Engeler
import Scott2026.EngelerVA
import Scott2026.Lambda

/-!
# Interpretation of pure fun -terms in a reflexive dcpo (Definition 25)

Furber-Mardare-Panangaden-Scott, CSL 2026, Definition 25, following
[4, Definition 5.4.2]. This is the ground interpretation on
`ReflexiveDcpo` (Definition 19). There is no constant clause, no tag 3,
and no `?(D, Var, ?)``.

A valuation is a Finset-supported partial function `Var -> D`. The paper
requires `fv(M) subseq dom(?)`. The three clauses are

* `?x?_? = ?(x)`
* `?MN?_? = ?M?_? * ?N?_?`
* `?fun x. M?_? = lam(fun d. ?M?_?(x := d))`

with `?(x := d)` the paper's update (`dom(?) U {x}`, overwrite at `x`).
For closed terms, `?M? := ?M?_{}`.

The meta-lambda `d |-> ?M?_?(x := d)` is Scott-continuous
(`interp_update_scott`), so `ReflexiveDcpo.lam` is applied to a map in
the retract's Scott-continuous class.

[4, Theorem 5.4.4] on the capture-free fragment is `interp_sound` /
`definition_25_sound` (`LamEqNC`, `Lam.FreeFor`, naive `Lam.subst`).
Unrestricted naive substitution is false (`interp_substNaive_captures`).

```

```

The paper theory is `LamEq` (CA-b + a). Full ground soundness is
`interp_sound_full` / `definition_25_sound_full` under `[Infinite Var]`.
There is no `SetoidF_A` map, no A-valued `?*^A_?`, and no Theorem 26.
-/

open Set Function

namespace Scott2026

variable {Var : Type*} {D : Type*}

/-!
## Valuations
-/

/-- Definition 25: a valuation is a partial function `Var -> D`, represented
as a Finset-supported total map. Only values on `domain` are used. -/
structure Valuation (Var : Type*) (D : Type*) where
  domain : Finset Var
  toFun : Var -> D

namespace Valuation

variable [DecidableEq Var]

instance : CoeFun (Valuation Var D) (fun _ => Var -> D) where
  coe := toFun

/-- The paper's `?(x)`, given `x` in `dom(?)`. -/
def lookup (? : Valuation Var D) (x : Var) (_h : x in ?.domain) : D :=
  ?.toFun x

/-- The paper's update `?(x := d)`: domain `dom(?) U {x}`, overwrite at `x`. -/
def update (? : Valuation Var D) (x : Var) (d : D) : Valuation Var D where
  domain := insert x ?.domain
  toFun := Function.update ?.toFun x d

/-- A valuation with empty domain and a dummy total map. Dummy values are
unused when `fv(M) subseq {}`. -/
def default (d : D) : Valuation Var D where
  domain := {}
  toFun := fun _ => d

/-- The empty valuation `{}`. Dummy values are unused on closed terms. -/
def empty [CompleteLattice D] : Valuation Var D :=
  default (False : D)

omit [DecidableEq Var] in
theorem ext {? sigma : Valuation Var D} (hd : ?.domain = sigma.domain)
  (hf : ?.toFun = sigma.toFun) : ? = sigma := by
  cases ?
  cases sigma
  subst hd
  subst hf
  rfl

@[simp] theorem update_domain (? : Valuation Var D) (x : Var) (d : D) :
  (?.update x d).domain = insert x ?.domain :=
  rfl

@[simp] theorem update_toFun_self (? : Valuation Var D) (x : Var) (d : D) :
  (?.update x d).toFun x = d := by
  simp [update]

```

```

@[simp] theorem update_toFun_of_ne (? : Valuation Var D) {x y : Var} (d : D) :
  (h : y != x) : (? .update x d).toFun y = ?.toFun y := by
  simp [update, h]

omit [DecidableEq Var] in
@[simp] theorem empty_domain [CompleteLattice D] :
  (empty : Valuation Var D).domain = {} :=
  rfl

theorem update_overwrite (? : Valuation Var D) (x : Var) (d e : D) :
  (? .update x d).update x e = ?.update x e := by
  refine ext ?_ ?_
  * exact Finset.insert_eq_of_mem (Finset.mem_insert_self x ?.domain)
  * exact update_idem d e ?.toFun

theorem update_comm {x y : Var} (hne : x != y) (? : Valuation Var D) (d e : D) :
  (? .update x d).update y e = (? .update y e).update x d := by
  refine ext ?_ ?_
  * simp [update, Finset.insert_comm]
  * exact Function.update_comm hne d e ?.toFun

end Valuation

/-!
## Scott-continuity helpers for the meta-lambda
-/

variable [DecidableEq Var] [CompleteLattice D]

/-- Pointwise evaluation `f |-> f e` is Scott-continuous on a pointwise
function space. -/
theorem scottContinuous_eval {E F : Type*} [Preorder E] [Preorder F] (e : E) :
  IsScottContinuous (fun f : E -> F => f e) := by
  intro S _hSne _hSdir a hlub
  exact (isLUB_pi.mp hlub) e

/-- A family `D -> (E -> F)` that is Scott-continuous in the first variable
pointwise is Scott-continuous into the pointwise function space. -/
theorem scottContinuous_of_pi {E F : Type*} [Preorder E] [Preorder F]
  {H : D -> E -> F} (hpt : forall e, IsScottContinuous (fun d => H d e)) :
  IsScottContinuous H := by
  intro S hne hdir a hlub
  refine isLUB_pi.mpr fun e => ?_
  have himg : Function.eval e '' (H '' S) = (fun d => H d e) '' S := by
    rw [← image_comp]
    rfl
  rw [himg]
  exact hpt e hne hdir hlub

/-- The image of a directed set under a monotone map is directed. -/
theorem directedOn_image_monotone {a b : Type*} [Preorder a] [Preorder b]
  {S : Set a} {f : a -> b} (hdir : DirectedOn (* <= *) S) (hf : Monotone f) :
  DirectedOn (* <= *) (f '' S) := by
  intro y hy z hz
  obtain <s, hs, rfl> := (mem_image _ _ _).mp hy
  obtain <t, ht, rfl> := (mem_image _ _ _).mp hz
  obtain <u, hu, hsu, htu> := hdir s hs t ht
  exact <f u, mem_image_of_mem f hu, hf hsu, hf htu>

/-- Application of a Scott-continuous family to a Scott-continuous argument.
Each `H d` must itself be Scott-continuous. -/
theorem scottContinuous_apply {E F : Type*} [CompleteLattice E] [CompleteLattice F]

```

```

{H : D -> E -> F} {g : D -> E} (hH : IsScottContinuous H)
(hHpt : forall d, IsScottContinuous (H d)) (hg : IsScottContinuous g) :
IsScottContinuous (fun d => H d (g d)) := by
intro S hne hdir a hlub
have hHs : IsLUB (H '' S) (H a) := hH hne hdir hlub
have hgs : IsLUB (g '' S) (g a) := hg hne hdir hlub
have hmonoH : Monotone H := hH.monotone
have hmono_g : Monotone g := hg.monotone
have hdirH : DirectedOn (* <= *) (H '' S) := directedOn_image_monotone hdir hmonoH
have hdirg : DirectedOn (* <= *) (g '' S) := directedOn_image_monotone hdir hmono_g
have hSneH : (H '' S).Nonempty := hne.image H
have hSneg : (g '' S).Nonempty := hne.image g
refine <?upper, ?least>
* intro y hy
  obtain <s, hs, rfl> := (mem_image _ _ _).mp hy
  exact le_trans (hmonoH (hlub.1 hs) (g s)) ((hHpt a).monotone (hmono_g (hlub.1 hs)))
* intro b hb
  have hst : forall s in S, forall t in S, H s (g t) <= b := by
    intro s hs t ht
    obtain <u, hu, hsu, ht> := hdir s hs t ht
    have hsu_eval : H s (g t) <= H u (g t) := hmonoH hsu (g t)
    have ht_u_eval : H u (g t) <= H u (g u) := (hHpt u).monotone (hmono_g ht_u)
    have hu_b : H u (g u) <= b := hb (mem_image_of_mem _ hu)
    exact (hsu_eval.trans ht_u_eval).trans hu_b
  have hsa : forall s in S, H s (g a) <= b := by
    intro s hs
    have hHs_s : IsLUB (H s '' (g '' S)) (H s (g a)) :=
      hHpt s hSneg hdirg hgs
    refine hHs_s.2 ?_
    intro y hy
    obtain <z, hz, rfl> := (mem_image _ _ _).mp hy
    obtain <t, ht, rfl> := (mem_image _ _ _).mp hz
    exact hst s hs t ht
  have heval : IsLUB ((fun f : E -> F => f (g a)) '' (H '' S)) (H a (g a)) :=
    scottContinuous_eval (g a) hSneH hdirH hHs
  refine heval.2 ?_
  intro y hy
  obtain <f, hf, rfl> := (mem_image _ _ _).mp hy
  obtain <s, hs, rfl> := (mem_image _ _ _).mp hf
  exact hsa s hs

/-- Uncurried application of a reflexive dcpo, composed with Scott-continuous
maps, is Scott-continuous. -/
theorem ReflexiveDcpo.app_comp_scott (R : ReflexiveDcpo D) {f g : D -> D}
(hf : IsScottContinuous f) (hg : IsScottContinuous g) :
IsScottContinuous (fun d => R.app (f d) (g d)) :=
scottContinuous_apply (hf.comp R.fun_scott)
(fun d => R.fun_scott_pt (f d)) hg

/-!
## Interpretation
-/

/-- Definition 25: `?M?_?` in a reflexive dcpo. The paper's side condition
`fv(M) subseteq dom(?)` makes the value independent of dummy entries off the
domain (`interp_agree`). -/
def interp (R : ReflexiveDcpo D) : Lam Var -> Valuation Var D -> D
| .var x, ? => ?.toFun x
| .app M N, ? => R.app (interp R M ?) (interp R N ?)
| .abs x M, ? => R.lam fun d => interp R M (?.update x d)

/-- Closed-term interpretation `?M? := ?M?_{}`. -/
def interpClosed (R : ReflexiveDcpo D) (M : Lam Var) : D :=

```

```

interp R M Valuation.empty

theorem interp_var (R : ReflexiveDcpo D) (x : Var) (? : Valuation Var D)
  (h : x in ?.domain) :
  interp R (Lam.var x) ? = ?.lookup x h :=
  rfl

theorem interp_app (R : ReflexiveDcpo D) (M N : Lam Var) (? : Valuation Var D) :
  interp R (M.app N) ? = R.app (interp R M ?) (interp R N ?) :=
  rfl

theorem interp_abs (R : ReflexiveDcpo D) (x : Var) (M : Lam Var)
  (? : Valuation Var D) :
  interp R (Lam.abs x M) ? = R.lam fun d => interp R M (?update x d) :=
  rfl

theorem interp_closed (R : ReflexiveDcpo D) (M : Lam Var) :
  interpClosed R M = interp R M Valuation.empty :=
  rfl

/-- Interpretations agree when valuations agree on `fv(M)`. -/
theorem interp_agree (R : ReflexiveDcpo D) (M : Lam Var)
  (? sigma : Valuation Var D) (h : forall x in M.fv, ?.toFun x = sigma.toFun x) :
  interp R M ? = interp R M sigma := by
  induction M generalizing ? sigma with
  | var x =>
    have hx : ?.toFun x = sigma.toFun x := h x (by simp [Lam.fv])
    simpa [interp] using hx
  | app M N ihM ihN =>
    have hM : forall x in M.fv, ?.toFun x = sigma.toFun x := fun x hx =>
      h x (Finset.mem_union_left N.fv hx)
    have hN : forall x in N.fv, ?.toFun x = sigma.toFun x := fun x hx =>
      h x (Finset.mem_union_right M.fv hx)
    simp only [interp]
    rw [ihM ? sigma hM, ihN ? sigma hN]
  | abs x M ih =>
    simp only [interp]
    congr 1
    funext d
    refine ih (?update x d) (sigma.update x d) ?_
    intro y hy
    by_cases hyx : y = x
    * subst hyx
      simp
    * simp [Valuation.update_toFun_of_ne _ _ hyx]
      exact h y (Finset.mem_sdiff.mpr <hy, mt Finset.mem_singleton.mp hyx>)

/-- The meta-lambda `d |-> ?M?_{?(x := d)}` is Scott-continuous, so it lies
in the retract's Scott-continuous class. -/
theorem interp_update_scott (R : ReflexiveDcpo D) (M : Lam Var)
  (? : Valuation Var D) (x : Var) :
  IsScottContinuous (fun d => interp R M (?update x d)) := by
  induction M generalizing ? x with
  | var y =>
    by_cases hyx : y = x
    * subst hyx
      convert ScottContinuous.id (a := D) using 1
      funext d
      simp [interp]
    * convert (ScottContinuous.const (?toFun y) :
      IsScottContinuous (fun _ : D => ?.toFun y)) using 1
      funext d
      simp [interp, hyx]

```

```

| app M N ihM ihN =>
  simp only [interp]
  exact R.app_comp_scott (ihM ? x) (ihN ? x)
| abs y M ih =>
  simp only [interp]
  refine (scottContinuous_of_pi (fun e => ?slice)).comp R.lam_scott
  by_cases hxy : x = y
  * subst hxy
    convert (ScottContinuous.const (interp R M (?update x e)) :
      IsScottContinuous (fun _ : D => interp R M (?update x e))) using 1
    funext d
    simp [Valuation.update_overwrite]
  * convert ih (?update y e) x using 1
    funext d
    simp [Valuation.update_comm hxy]

/-- Updating a variable that is not free does not change the interpretation. -/
theorem interp_update_fresh (R : ReflexiveDcpo D) (M : Lam Var)
  (? : Valuation Var D) (x : Var) (d : D) (h : x notin M.fv) :
  interp R M (?update x d) = interp R M ? := by
  refine interp_agree R M _ _ ?_
  intro y hy
  have hxy : y != x := fun hxy => h (hxy |> hy)
  exact Valuation.update_toFun_of_ne ? d hxy

/-- Substitution lemma, restricted to `N` free for `x` in `M`. Unrestricted
equality is false: `Lam.subst` does not rename, so a binder `y != x` with
`y in fv(N)` captures. The missing lemma for the capturing case is
freshness `y notin fv(N)` or  $\alpha$ -conversion; neither is added. -/
theorem interp_subst (R : ReflexiveDcpo D) (M N : Lam Var) (x : Var)
  (? : Valuation Var D) (hfree : M.FreeFor x N) :
  interp R (M.subst x N) ? = interp R M (?update x (interp R N ?)) := by
  induction M generalizing ? with
  | var y =>
    simp only [Lam.subst, Lam.substNaive]
    by_cases hyx : y = x
    * subst hyx
      simp [interp]
    * simp [hyx, interp]
  | app M_1 M_2 ih_1 ih_2 =>
    obtain <h_1, h_2> := hfree
    simp only [Lam.subst, Lam.substNaive, interp]
    rw [ih_1 ? h_1, ih_2 ? h_2]
  | abs y M ih =>
    simp only [Lam.subst, Lam.substNaive]
    split_ifs with hyx
    * subst hyx
      simp only [interp]
      congr 1
      funext d
      rw [Valuation.update_overwrite]
    * obtain <hM, hcap> := Lam.freeFor_abs_of_ne hyx hfree
      simp only [interp]
      congr 1
      funext d
      cases hcap with
      | inl hyN =>
        have hN : interp R N (?update y d) = interp R N ? :=
          interp_update_fresh R N ? y d hyN
        rw [ih (?update y d) hM, hN, Valuation.update_comm hyx]
      | inr hxM =>
        have hsf : M.substNaive x N = M := Lam.subst_fresh N hxM
        rw [hsf]

```



```

    refine interp_agree R M _ _ ?_
    intro z hz
    have hzx : z != x := fun hzx => hxM (hzx |> hz)
    by_cases hzy : z = y
    * subst hzy
      simp
    * simp [Valuation.update_toFun_of_ne ? d hzy,
      Valuation.update_toFun_of_ne (? .update x (interp R N ?)) d hzy,
      Valuation.update_toFun_of_ne ? (interp R N ?) hzx]

/-- [4, Theorem 5.4.4] b-case: `?(fun x. M) N?_? = ?M[x := N]?_?` when `N` is
free for `x` in `M`. Uses `ReflexiveDcpo.retract` on the Scott-continuous
meta-lambda. Capturing b is not claimed. -/
theorem interp_sound_beta (R : ReflexiveDcpo D) (x : Var) (M N : Lam Var)
  (? : Valuation Var D) (hfree : M.FreeFor x N) :
  interp R ((Lam.abs x M).app N) ? = interp R (M.subst x N) ? := by
  have hsc : IsScottContinuous (fun d => interp R M (? .update x d)) :=
    interp_update_scott R M ? x
  calc
    interp R ((Lam.abs x M).app N) ?
      = R.app (R.lam fun d => interp R M (? .update x d)) (interp R N ?) :=
        rfl
    _ = (fun d => interp R M (? .update x d)) (interp R N ?) := by
      change R.funMap (R.lam fun d => interp R M (? .update x d)) (interp R N ?) =
        (fun d => interp R M (? .update x d)) (interp R N ?)
      rw [R.retract _ hsc]
    _ = interp R M (? .update x (interp R N ?)) :=
      rfl
    _ = interp R (M.subst x N) ? :=
      (interp_subst R M N x ? hfree).symm

/-- [4, Theorem 5.4.4] on the capture-free fragment: `LamEqNC M N` implies
`?M?_? = ?N?_?`. Congruence rules need no freshness; b needs `FreeFor`.
Induction is on `LamEqNC`, not unrestricted `LamEq` (capturing `LamEq.beta`
is unsound for this `subst`). -/
theorem interp_sound (R : ReflexiveDcpo D) {M N : Lam Var}
  (h : LamEqNC M N) (? : Valuation Var D) :
  interp R M ? = interp R N ? := by
  induction h generalizing ? with
  | refl M =>
    rfl
  | symm _ ih =>
    exact (ih ?).symm
  | trans _ _ ih1 ih2 =>
    exact (ih1 ?).trans (ih2 ?)
  | app_left _ ih =>
    simp only [interp]
    rw [ih ?]
  | app_right _ ih =>
    simp only [interp]
    rw [ih ?]
  | xi x _ ih =>
    simp only [interp]
    congr 1
    funext d
    exact ih (? .update x d)
  | beta x M N hfree =>
    exact interp_sound_beta R x M N ? hfree

/-- Closed form of [4, Theorem 5.4.4]: capture-free equations are sound at
`?*?_?`. Immediate from `interp_sound`. -/

```

```

theorem interpClosed_sound (R : ReflexiveDcpo D) {M N : Lam Var}
  (h : LamEqNC M N) :
  interpClosed R M = interpClosed R N :=
  interp_sound R h Valuation.empty

/-!
## Capture-avoiding substitution and full [4, Theorem 5.4.4]
-/

theorem pickFresh_not_mem [Infinite Var] (avoid : Finset Var) (default : Var) :
  Lam.pickFresh avoid default notin avoid :=
  Lam.pickFresh_of_exists (Infinite.exists_notMem_finset avoid)

/-- [4, Theorem 5.4.4] substitution lemma for capture-avoiding `substCA`.
Requires infinitely many names so `pickFresh` is always fresh. -/
theorem interp_subst_CA [Infinite Var] (R : ReflexiveDcpo D) (M N : Lam Var)
  (x : Var) (? : Valuation Var D) :
  interp R (Lam.substCA M x N) ? =
  interp R M (?.update x (interp R N ?)) := by
  induction hsize : M.size using Nat.strong_induction_on generalizing M N x ? with
  | h k ih =>
    match M with
    | .var y =>
      rw [Lam.substCA_var]
      by_cases hyx : y = x
      * subst hyx
      simp [interp]
      * simp [hyx, interp]
    | .app M_1 M_2 =>
      have h_1 : M_1.size < k := by
        simp [Lam.size] at hsize; omega
      have h_2 : M_2.size < k := by
        simp [Lam.size] at hsize; omega
      simp only [Lam.substCA_app, interp]
      rw [ih M_1.size h_1 M_1 N x ? rfl, ih M_2.size h_2 M_2 N x ? rfl]
    | .abs y M =>
      rw [Lam.substCA_abs]
      by_cases hyx : y = x
      * rw [if_pos hyx]
      subst hyx
      simp only [interp]
      congr 1
      funext d
      rw [Valuation.update_overwrite]
      * rw [if_neg hyx]
      by_cases hxM : x notin M.fv
      * rw [if_pos hxM]
      simp only [interp]
      congr 1
      funext d
      have hcomm := Valuation.update_comm (Ne.symm hyx) ? (interp R N ?) d
      rw [hcomm]
      exact (interp_update_fresh R M (?.update y d) x (interp R N ?) hxM).symm
      * rw [if_neg hxM]
      by_cases hyN : y notin N.fv
      * rw [if_pos hyN]
      simp only [interp]
      congr 1
      funext d
      have hMs : M.size < k := by
        simp [Lam.size] at hsize; omega
      rw [ih M.size hMs M N x (?.update y d) rfl]
      have hN : interp R N (?.update y d) = interp R N ? :=

```

```

    interp_update_fresh R N ? y d hyN
  rw [hN, Valuation.update_comm hyx]
* rw [if_neg hyN]
  set z := Lam.pickFresh (M.vars U N.fv U {x, y}) y
  have hz : z notin M.vars U N.fv U {x, y} :=
    pickFresh_not_mem _ y
  have hzM : z notin M.vars := fun h => hz (Finset.mem_union.mpr (Or.inl
    (Finset.mem_union.mpr (Or.inl h))))
  have hzN : z notin N.fv := fun h => hz (Finset.mem_union.mpr (Or.inl
    (Finset.mem_union.mpr (Or.inr h))))
  have hzx : z != x := fun h => hz (by simp [h])
  have hzy : z != y := fun h => hz (by simp [h])
  have hMs : M.size < k := by
    simp [Lam.size] at hsize; omega
  have hren : (M.substNaive y (Lam.var z)).size = M.size :=
    Lam.size_substNaive_var M y z
  simp only [interp]
  congr 1
  funext d
  rw [ih M.size hMs (M.substNaive y (Lam.var z)) N x (?update z d)
    hren]
  have hN : interp R N (?update z d) = interp R N ? :=
    interp_update_fresh R N ? z d hzN
  rw [hN, Valuation.update_comm hzx]
  have hfree : M.FreeFor y (Lam.var z) :=
    Lam.freeFor_of_not_mem_vars y hzM
  have hsub := interp_subst R M (Lam.var z) y
    ((?.update x (interp R N ?)).update z d) hfree
  have hzval : interp R (Lam.var z)
    ((?.update x (interp R N ?)).update z d) = d := by
    simp [interp]
  rw [hsub, hzval]
  have hzMf : z notin M.fv := fun h => hzM (Lam.fv_subset_vars M h)
  rw [Valuation.update_comm hzy]
  exact interp_update_fresh R M
    ((?.update x (interp R N ?)).update y d) z d hzMf

/-- a-soundness: `?fun x. M?_? = ?fun y. M[x:=y]?_?` when `y notin fv(M)` -/
theorem interp_alpha [Infinite Var] (R : ReflexiveDcpo D) (x y : Var)
  (M : Lam Var) (? : Valuation Var D) (hy : y notin M.fv) :
  interp R (Lam.abs x M) ? =
    interp R (Lam.abs y (Lam.substCA M x (Lam.var y))) ? := by
  simp only [interp]
  congr 1
  funext d
  rw [interp_subst_CA R M (Lam.var y) x (?update y d)]
  simp only [interp]
  by_cases hyx : y = x
* subst hyx
  rw [Valuation.update_toFun_self, Valuation.update_overwrite]
* rw [Valuation.update_toFun_self, Valuation.update_comm hyx]
  exact (interp_update_fresh R M (?update x d) y d hy).symm

/-- [4, Theorem 5.4.4] b-case for capture-avoiding substitution. -/
theorem interp_sound_beta_full [Infinite Var] (R : ReflexiveDcpo D)
  (x : Var) (M N : Lam Var) (? : Valuation Var D) :
  interp R ((Lam.abs x M).app N) ? = interp R (Lam.substCA M x N) ? := by
  have hsc : IsScottContinuous (fun d => interp R M (?update x d)) :=
    interp_update_scott R M ? x
  calc
    interp R ((Lam.abs x M).app N) ?
      = R.app (R.lam fun d => interp R M (?update x d)) (interp R N ?) :=
      rfl

```

```

_ = (fun d => interp R M (?update x d)) (interp R N ?) := by
  change R.funMap (R.lam fun d => interp R M (?update x d)) (interp R N ?) =
    (fun d => interp R M (?update x d)) (interp R N ?)
  rw [R.retract _ hsc]
_ = interp R M (?update x (interp R N ?)) :=
  rfl
_ = interp R (Lam.substCA M x N) ? :=
  (interp_subst_CA R M N x ?).symm

/-- [4, Theorem 5.4.4] at full strength: `LamEq M N` implies `?M?_? = ?N?_?`.
No `FreeFor` hypothesis. Requires `Infinite Var` so CA renaming is defined. -/
theorem interp_sound_full [Infinite Var] (R : ReflexiveDcpo D) {M N : Lam Var}
  (h : LamEq M N) (? : Valuation Var D) :
  interp R M ? = interp R N ? := by
  induction h generalizing ? with
  | refl M =>
    rfl
  | symm _ ih =>
    exact (ih ?).symm
  | trans _ _ ih1 ih2 =>
    exact (ih1 ?).trans (ih2 ?)
  | app_left _ ih =>
    simp only [interp]
    rw [ih ?]
  | app_right _ ih =>
    simp only [interp]
    rw [ih ?]
  | xi x _ ih =>
    simp only [interp]
    congr 1
    funext d
    exact ih (?update x d)
  | beta x M N =>
    exact interp_sound_beta_full R x M N ?
  | alpha x y M hy =>
    exact interp_alpha R x y M ? hy

theorem interpClosed_sound_full [Infinite Var] (R : ReflexiveDcpo D)
  {M N : Lam Var} (h : LamEq M N) :
  interpClosed R M = interpClosed R N :=
  interp_sound_full R h Valuation.empty

/-- [4, Theorem 5.4.4] at full strength (paper name). -/
theorem definition_25_sound_full [Infinite Var] (R : ReflexiveDcpo D)
  {M N : Lam Var} (h : LamEq M N) (? : Valuation Var D) :
  interp R M ? = interp R N ? :=
  interp_sound_full R h ?

/-!
## Counterexample: naive substitution captures
-/

/-- List encoding used to inject `List Nat` into `Nat`. -/
def captureListCode : List Nat -> Nat
| [] => 0
| n :: ns => Nat.pair n (captureListCode ns) + 1

theorem captureListCode_injective : Function.Injective captureListCode := by
  intro xs
  induction xs with
  | nil =>
    intro ys h
    cases ys with

```

```

| nil => rfl
| cons _ _ => simp [captureListCode] at h
| cons a as ih =>
  intro ys h
  cases ys with
  | nil => simp [captureListCode] at h
  | cons b bs =>
    have hpair : Nat.pair a (captureListCode as) = Nat.pair b (captureListCode bs) :=
      Nat.succ_injective (by simpa [captureListCode] using h)
    have hab := Nat.pair_eq_pair.mp hpair
    exact congr_arg_2 List.cons hab.1 (ih hab.2)

/-- Injective pairing `P_fin(Nat) x Nat -> Nat`. -/
def capturePair (p : Finset Nat x Nat) : Nat :=
  Nat.pair (captureListCode (p.1.sort (* <= *))) p.2

theorem capturePair_injective : Function.Injective capturePair := by
  intro p q h
  have hpq := Nat.pair_eq_pair.mp h
  have hlist : p.1.sort (* <= *) = q.1.sort (* <= *) :=
    captureListCode_injective hpq.1
  refine Prod.ext ?_ hpq.2
  apply Finset.ext
  intro x
  rw [← Finset.mem_sort (s := p.1) (r := (* <= *)) (a := x), hlist]
  exact Finset.mem_sort (s := q.1) (r := (* <= *)) (a := x)

/-- Engeler reflexive dcpo used to witness capture. -/
def captureDcpo : ReflexiveDcpo (Set Nat) :=
  engelerReflexiveDcpo capturePair capturePair_injective

/-- Unrestricted `interp_subst` is false for naive substitution:
`(fun y. x)[x:=y]` is `fun y. y`, while the updated valuation still reads `x`
as the value of `y`. -/
def captureVal : Valuation (Fin 2) (Set Nat) where
  domain := {0, 1}
  toFun := fun i => if i = 1 then ({0} : Set Nat) else {}

theorem interp_substNaive_captures :
  interp captureDcpo (Lam.substNaive (Lam.abs 1 (Lam.var 0)) 0 (Lam.var 1))
  captureVal !=
  interp captureDcpo (Lam.abs 1 (Lam.var 0))
  (captureVal.update 0 (interp captureDcpo (Lam.var 1) captureVal)) := by
  intro h
  have hLHS :
    interp captureDcpo (Lam.substNaive (Lam.abs 1 (Lam.var 0)) 0 (Lam.var 1))
    captureVal = captureDcpo.lam id := by
    simp [captureVal, Lam.substNaive, interp, Valuation.update]
    rfl
  have hRHS :
    interp captureDcpo (Lam.abs 1 (Lam.var 0))
    (captureVal.update 0 (interp captureDcpo (Lam.var 1) captureVal)) =
    captureDcpo.lam (fun _ => ({0} : Set Nat)) := by
    simp [captureVal, interp, Valuation.update]
  rw [hLHS, hRHS] at h
  have hconst :
    capturePair ({}, 0) in captureDcpo.lam (fun _ => ({0} : Set Nat)) :=
    <{}, 0, by simp, rfl>
  have hid : capturePair ({}, 0) notin captureDcpo.lam id := by
    intro <K, q, hq, heq>
    have hKq : (K, q) = ({}, 0) := capturePair_injective heq.symm
    cases hKq
    simp at hq

```

```

    exact hid (h |> hconst)

/-!
## Definition 32(i) and Proposition 33
-/

/-- Applying an interpreted abstraction is the meta-lambda at that argument. -/
theorem interp_abs_app (R : ReflexiveDcpo D) (x : Var) (M : Lam Var)
  (? : Valuation Var D) (d : D) :
  R.app (interp R (Lam.abs x M) ?) d = interp R M (? .update x d) := by
  have hsc := interp_update_scott R M ? x
  change R.funMap (R.lam fun e => interp R M (? .update x e)) d =
    interp R M (? .update x d)
  rw [R.retract _ hsc]

theorem interp_closed_of_fv_empty (R : ReflexiveDcpo D) (M : Lam Var)
  (? : Valuation Var D) (h : M.fv = {}) :
  interp R M ? = interpClosed R M :=
  interp_agree R M ? Valuation.empty (fun x hx => by
    rw [h] at hx
    exact absurd hx (Finset.notMem_empty x))

theorem churchTrue_interp_eq (pair : Finset Nat x Nat -> Nat)
  (hpair : Function.Injective pair) :
  interpClosed (engelerReflexiveDcpo pair hpair) churchTrue =
    engelerLam pair (fun X => engelerLam pair (fun _ => X)) := by
  set R := engelerReflexiveDcpo pair hpair
  have hlam : R.lam = engelerLam pair := rfl
  unfold interpClosed churchTrue
  simp [interp, hlam, Valuation.update, Valuation.empty, Function.update]

theorem churchFalse_interp_eq (pair : Finset Nat x Nat -> Nat)
  (hpair : Function.Injective pair) :
  interpClosed (engelerReflexiveDcpo pair hpair) churchFalse =
    engelerLam pair (fun _ => engelerLam pair (fun Y => Y)) := by
  set R := engelerReflexiveDcpo pair hpair
  have hlam : R.lam = engelerLam pair := rfl
  unfold interpClosed churchFalse
  simp [interp, hlam, Valuation.update, Valuation.empty, Function.update]

theorem churchTrue_interp_ne_churchFalse
  (pair : Finset Nat x Nat -> Nat) (hpair : Function.Injective pair) :
  interpClosed (engelerReflexiveDcpo pair hpair) (churchTrue : Lam (Fin 2)) !=
    interpClosed (engelerReflexiveDcpo pair hpair) churchFalse := by
  intro h
  let w := pair ({}, pair ({0}, (0 : Nat)))
  have hfalse : w in interpClosed (engelerReflexiveDcpo pair hpair) churchFalse := by
    rw [churchFalse_interp_eq]
    refine <{}, pair ({0}, (0 : Nat)), ?_, rfl>
    exact <({0} : Finset Nat), 0, by simp, rfl>
  have htrue : w notin interpClosed (engelerReflexiveDcpo pair hpair) churchTrue := by
    rw [churchTrue_interp_eq]
    intro hw
    obtain <K, q, hq, heq> := hw
    have hKq : (K, q) = ({}, pair ({0}, (0 : Nat))) := hpair heq.symm
    cases hKq
    obtain <L, r, hr, _> := hq
    simp at hr
    exact htrue (h |> hfalse)

/-- Successor graph used to separate Church numerals. -/
def numeralSuccGraph (pair : Finset Nat x Nat -> Nat) : Set Nat :=
  {x | exists k : Nat, x = pair ({k}, k + 1)}

```

```

theorem numeralSuccGraph_app (pair : Finset Nat x Nat -> Nat)
  (hpair : Function.Injective pair) (n : Nat) :
  engelerApp pair (numeralSuccGraph pair) ({n} : Set Nat) = {n + 1} := by
  ext q
  constructor
  * intro <K, hK, hF>
    obtain <k, heq> := hF
    have hKK : (K, q) = ({k}, k + 1) := hpair heq
    cases hKK
    have hk : k = n := by
      have : k in ({n} : Set Nat) := hK (by simp)
      simpa using this
    simp [hk]
  * intro hq
    rw [Set.mem_singleton_iff] at hq
    subst hq
    exact <{n}, by simp, <n, rfl>>

theorem churchNum_interp_zero (pair : Finset Nat x Nat -> Nat)
  (hpair : Function.Injective pair) (F X : Set Nat) :
  (engelerReflexiveDcpo pair hpair).app
    ((engelerReflexiveDcpo pair hpair).app
      (interpClosed (engelerReflexiveDcpo pair hpair) (churchNum 0)) F) X = X := by
  set R := engelerReflexiveDcpo pair hpair
  have h1 : R.app (interpClosed R (churchNum 0)) F =
    interp R (Lam.abs 1 (Lam.var 1)) (Valuation.empty.update 0 F) := by
    simp [interpClosed, churchNum, interp_abs_app]; rfl
  rw [h1, interp_abs_app]
  simp [interp, Valuation.update, Valuation.empty, Function.update]

theorem churchNum_interp_succ (pair : Finset Nat x Nat -> Nat)
  (hpair : Function.Injective pair) (n : Nat) (F X : Set Nat) :
  (engelerReflexiveDcpo pair hpair).app
    ((engelerReflexiveDcpo pair hpair).app
      (interpClosed (engelerReflexiveDcpo pair hpair) (churchNum (n + 1))) F) X =
  (engelerReflexiveDcpo pair hpair).app F
    ((engelerReflexiveDcpo pair hpair).app
      ((engelerReflexiveDcpo pair hpair).app
        (interpClosed (engelerReflexiveDcpo pair hpair) (churchNum n)) F) X) := by
  set R := engelerReflexiveDcpo pair hpair
  have h1 : R.app (interpClosed R (churchNum (n + 1))) F =
    interp R
      (Lam.abs 1
        (Lam.app (Lam.var 0)
          (Lam.app (Lam.app (churchNum n) (Lam.var 0)) (Lam.var 1))))
      (Valuation.empty.update 0 F) := by
    simp [interpClosed, churchNum, interp_abs_app]
  rw [h1, interp_abs_app]
  have hcn : interp R (churchNum n)
    ((Valuation.empty.update (0 : Fin 2) F).update 1 X) =
    interpClosed R (churchNum n) :=
    interp_closed_of_fv_empty R (churchNum n) _ (churchNum_fv n)
  have h0 : ((Valuation.empty.update (0 : Fin 2) F).update 1 X).toFun 0 = F :=
    Valuation.update_toFun_of_ne (Valuation.empty.update (0 : Fin 2) F)
      (x := 1) (y := 0) X Fin.zero_ne_one
  have hX : ((Valuation.empty.update (0 : Fin 2) F).update 1 X).toFun 1 = X :=
    Valuation.update_toFun_self _ 1 X
  simp [interp, h0, hX, hcn]

theorem churchNum_iter_interp (pair : Finset Nat x Nat -> Nat)
  (hpair : Function.Injective pair) (n : Nat) :
  (engelerReflexiveDcpo pair hpair).app

```

```

((engelerReflexiveDcpo pair hpair).app
 (interpClosed (engelerReflexiveDcpo pair hpair) (churchNum n))
 (numeralSuccGraph pair)) ({0} : Set Nat) = ({n} : Set Nat) := by

```

Lean 4 source (lines 801–1162)

```

set R := engelerReflexiveDcpo pair hpair
induction n with
| zero =>
  simp using churchNum_interp_zero pair hpair (numeralSuccGraph pair) ({0} : Set Nat)
| succ n ih =>
  have h := churchNum_interp_succ pair hpair n (numeralSuccGraph pair) ({0} : Set Nat)
  have happ : R.app (numeralSuccGraph pair) ({n} : Set Nat) = ({n + 1} : Set Nat) :=
    numeralSuccGraph_app pair hpair n
  calc
  R.app (R.app (interpClosed R (churchNum (n + 1))) (numeralSuccGraph pair))
    ({0} : Set Nat)
    = R.app (numeralSuccGraph pair)
      (R.app (R.app (interpClosed R (churchNum n)) (numeralSuccGraph pair))
        ({0} : Set Nat)) := h
  _ = R.app (numeralSuccGraph pair) ({n} : Set Nat) := by rw [ih]
  _ = ({n + 1} : Set Nat) := happ

theorem churchNum_interp_injective (pair : Finset Nat → Nat → Nat)
  (hpair : Function.Injective pair) :
  Function.Injective
    (fun n => interpClosed (engelerReflexiveDcpo pair hpair) (churchNum n)) := by
  intro n m hnm
  have hn := churchNum_iter_interp pair hpair n
  have hm := churchNum_iter_interp pair hpair m
  have heq : ({n} : Set Nat) = {m} := by
  calc
  ({n} : Set Nat)
  = (engelerReflexiveDcpo pair hpair).app
    ((engelerReflexiveDcpo pair hpair).app
      (interpClosed (engelerReflexiveDcpo pair hpair) (churchNum n))
      (numeralSuccGraph pair)) {0} := hn.symm
  _ = (engelerReflexiveDcpo pair hpair).app
    ((engelerReflexiveDcpo pair hpair).app
      (interpClosed (engelerReflexiveDcpo pair hpair) (churchNum m))
      (numeralSuccGraph pair)) {0} := by
    rw [show interpClosed (engelerReflexiveDcpo pair hpair) (churchNum n) =
      interpClosed (engelerReflexiveDcpo pair hpair) (churchNum m) from hnm]
  _ = {m} := hm
  have : n in ({m} : Set Nat) := by
    rw [← heq]
  simp
  simp using this

/-- Church Booleans and numerals on the Engeler model. -/
noncomputable def engelerWithNumerals : ReflexiveDcpoWithNumerals (Set Nat) where
toReflexiveDcpo := engelerReflexiveDcpo engelerPair engelerPair_injective
boolBot := interpClosed (engelerReflexiveDcpo engelerPair engelerPair_injective)
  churchFalse
boolTop := interpClosed (engelerReflexiveDcpo engelerPair engelerPair_injective)
  churchTrue
numeral := fun n =>
  interpClosed (engelerReflexiveDcpo engelerPair engelerPair_injective) (churchNum n)
bool_ne :=
  (churchTrue_interp_ne_churchFalse engelerPair engelerPair_injective).symm
numeral_inj := churchNum_interp_injective engelerPair engelerPair_injective

/-- Proposition 33: Church Booleans and Church numerals make the Engeler
model into a reflexive continuous lattice with numerals. -/

```



```

theorem proposition_33 :
  IsContinuousLattice (Set Nat) /\
    (engelerWithNumerals.toReflexiveDcpo =
      engelerReflexiveDcpo engelerPair engelerPair_injective) /\
    engelerWithNumerals.boolTop =
      interpClosed (engelerReflexiveDcpo engelerPair engelerPair_injective)
        churchTrue /\
    engelerWithNumerals.boolBot =
      interpClosed (engelerReflexiveDcpo engelerPair engelerPair_injective)
        churchFalse /\
    (forall n, engelerWithNumerals.numeral n =
      interpClosed (engelerReflexiveDcpo engelerPair engelerPair_injective)
        (churchNum n)) :=
  <isContinuousLattice_set Nat, rfl, rfl, rfl, fun _ => rfl>

/-!
## Lemma 35 (Engeler model)

Paper Lemma 35 is stated for an arbitrary reflexive dcpo with numerals.
The paper-type theorems are `lemma_35_of` / `lemma_35_i_of` /
`lemma_35_ii_of` in `Lemma35General.lean` (Church `not` / `m?`,
`scottExtend`). The constructions below are the Engeler specialisation
on `engelerWithNumerals`, using the Scott-continuous fingerprint
`?(X) = X * succGraph * {0}` (with `?(?c_n?) = {n}`) as a concrete
`gbar`; names `lemma_35` / `lemma_35_i` / `lemma_35_ii` stay
Engeler-only.
-/

/-- Church negation `fun b. b False top` on `Fin 2`. -/
def churchNot : Lam (Fin 2) :=
  Lam.abs 0 (((Lam.var 0).app churchFalse).app churchTrue)

/-- Witness `pair({}, pair({0}, 0))` used to separate Church Booleans. -/
def churchBoolSepWitness (pair : Finset Nat x Nat -> Nat) : Nat :=
  pair ({}, pair ({0}, (0 : Nat)))

theorem churchFalse_interp_mem_sep (pair : Finset Nat x Nat -> Nat)
  (hpair : Function.Injective pair) :
  churchBoolSepWitness pair in
  interpClosed (engelerReflexiveDcpo pair hpair) churchFalse := by
  rw [churchFalse_interp_eq]
  refine <{}, pair ({0}, (0 : Nat)), ?_, rfl>
  exact <({0} : Finset Nat), 0, by simp, rfl>

theorem churchTrue_interp_not_mem_sep (pair : Finset Nat x Nat -> Nat)
  (hpair : Function.Injective pair) :
  churchBoolSepWitness pair notin
  interpClosed (engelerReflexiveDcpo pair hpair) churchTrue := by
  rw [churchTrue_interp_eq]
  intro hw
  obtain <K, q, hq, heq> := hw
  have hKq : (K, q) = ({}, pair ({0}, (0 : Nat))) := hpair heq.symm
  cases hKq
  obtain <L, r, hr, _> := hq
  simp at hr

theorem churchTrue_interp_app (pair : Finset Nat x Nat -> Nat)
  (hpair : Function.Injective pair) (F X : Set Nat) :
  (engelerReflexiveDcpo pair hpair).app
    ((engelerReflexiveDcpo pair hpair).app
      (interpClosed (engelerReflexiveDcpo pair hpair) churchTrue) F) X = F := by
  set R := engelerReflexiveDcpo pair hpair
  have h1 : R.app (interpClosed R churchTrue) F =

```

```

      interp R (Lam.abs 1 (Lam.var 0)) (Valuation.empty.update 0 F) := by
    simp [interpClosed, churchTrue, interp_abs_app]; rfl
  rw [h1, interp_abs_app]
  have h0 : ((Valuation.empty.update (0 : Fin 2) F).update 1 X).toFun 0 = F :=
    Valuation.update_toFun_of_ne (Valuation.empty.update (0 : Fin 2) F)
      (x := 1) (y := 0) X Fin.zero_ne_one
  simp [interp, h0]

theorem churchNot_interp_app (pair : Finset Nat x Nat -> Nat)
  (hpair : Function.Injective pair) (B : Set Nat) :
  (engelerReflexiveDcpo pair hpair).app
    (interpClosed (engelerReflexiveDcpo pair hpair) churchNot) B =
  (engelerReflexiveDcpo pair hpair).app
    ((engelerReflexiveDcpo pair hpair).app B
      (interpClosed (engelerReflexiveDcpo pair hpair) churchFalse))
    (interpClosed (engelerReflexiveDcpo pair hpair) churchTrue) := by
  set R := engelerReflexiveDcpo pair hpair
  have h1 : R.app (interpClosed R churchNot) B =
    interp R ((Lam.var 0).app churchFalse).app churchTrue
    (Valuation.empty.update 0 B) := by
    simp [interpClosed, churchNot, interp_abs_app]
  rw [h1]
  simp only [interp]
  have hB : (Valuation.empty.update (0 : Fin 2) B).toFun 0 = B := by
    simp [Valuation.update]
  rw [hB, interp_closed_of_fv_empty R churchFalse _ churchFalse_fv,
    interp_closed_of_fv_empty R churchTrue _ churchTrue_fv]

theorem churchNot_interp_true (pair : Finset Nat x Nat -> Nat)
  (hpair : Function.Injective pair) :
  (engelerReflexiveDcpo pair hpair).app
    (interpClosed (engelerReflexiveDcpo pair hpair) churchNot)
    (interpClosed (engelerReflexiveDcpo pair hpair) churchTrue) =
  interpClosed (engelerReflexiveDcpo pair hpair) churchFalse := by
  rw [churchNot_interp_app]
  exact churchTrue_interp_app pair hpair _ _

theorem churchNot_interp_false (pair : Finset Nat x Nat -> Nat)
  (hpair : Function.Injective pair) :
  (engelerReflexiveDcpo pair hpair).app
    (interpClosed (engelerReflexiveDcpo pair hpair) churchNot)
    (interpClosed (engelerReflexiveDcpo pair hpair) churchFalse) =
  interpClosed (engelerReflexiveDcpo pair hpair) churchTrue := by
  rw [churchNot_interp_app]
  exact churchNum_interp_zero pair hpair _ _

/-- Fingerprint `(X) = X * succGraph * {0}`. Scott-continuous, and
`?(?c_n?) = {n}` by `churchNum_iter_interp`. -/
noncomputable def numeralFingerprint (X : Set Nat) : Set Nat :=
  engelerWithNumerals.app
    (engelerWithNumerals.app X (numeralSuccGraph engelerPair)) ({0} : Set Nat)

theorem numeralFingerprint_numeral (n : Nat) :
  numeralFingerprint (engelerWithNumerals.numeral n) = ({n} : Set Nat) := by
  simpa [numeralFingerprint, engelerWithNumerals, ReflexiveDcpo.app] using
    churchNum_iter_interp engelerPair engelerPair_injective n

theorem numeralFingerprint_scottContinuous :
  IsScottContinuous numeralFingerprint := by
  have hf : IsScottContinuous
    (fun X : Set Nat =>
      engelerWithNumerals.app X (numeralSuccGraph engelerPair)) :=
    ReflexiveDcpo.app_comp_scott (R := engelerWithNumerals.toReflexiveDcpo)

```

```

    ScottContinuous.id (ScottContinuous.const (numeralSuccGraph engelerPair))
exact ReflexiveDcpo.app_comp_scott (R := engelerWithNumerals.toReflexiveDcpo)
hf (ScottContinuous.const ({0} : Set Nat))

/-- Pointwise union of Boolean values of `chi_S` along a set of numerals. -/
noncomputable def chiBundle (S : Set Nat) (Y : Set Nat) : Set Nat :=
  ?_0 (chiNum engelerWithNumerals S '' Y)

theorem chiBundle_sUnion (S : Set Nat) (? : Set (Set Nat)) :
  chiBundle S (?_0 ?) = ?_0 (chiBundle S '' ?) := by
  ext x
  constructor
  * intro hx
    obtain <t, ht, hxt> := mem_sUnion.mp hx
    obtain <n, hn, rfl> := (mem_image _ _).mp ht
    obtain <Y, hY, hnY> := mem_sUnion.mp hn
    refine mem_sUnion.mpr <chiBundle S Y, mem_image_of_mem _ hY, ?_>
    exact mem_sUnion.mpr <chiNum engelerWithNumerals S n, mem_image_of_mem _ hnY, hxt>
  * intro hx
    obtain <t, ht, hxt> := mem_sUnion.mp hx
    obtain <Y, hY, rfl> := (mem_image _ _).mp ht
    obtain <u, hu, hxu> := mem_sUnion.mp hxt
    obtain <n, hn, rfl> := (mem_image _ _).mp hu
    refine mem_sUnion.mpr <chiNum engelerWithNumerals S n, ?_, hxu>
    exact mem_image_of_mem _ (mem_sUnion.mpr <Y, hY, hn>)

theorem chiBundle_scottContinuous (S : Set Nat) :
  IsScottContinuous (chiBundle S) := by
  intro ? _hne _hdir X hlub
  have hX : X = ?_0 ? := by
    rw [ <- sSup_eq_sUnion, hlub.sSup_eq ]
  have hunion : ?_0 (chiBundle S '' ?) = chiBundle S X := by
    rw [hX, chiBundle_sUnion]
  simpa [sSup_eq_sUnion, hunion] using isLUB_sSup (chiBundle S '' ?)

theorem chiBundle_singleton (S : Set Nat) (n : Nat) :
  chiBundle S ({n} : Set Nat) = chiNum engelerWithNumerals S n := by
  simp [chiBundle, image_singleton, sUnion_singleton]

/-- Scott-continuous extension `g` of `chi_S` off the numerals:
`g(X) = ?_{n in ?(X)} chi_S(n)`. -/
noncomputable def gbar (S : Set Nat) (X : Set Nat) : Set Nat :=
  chiBundle S (numeralFingerprint X)

theorem gbar_numeral (S : Set Nat) (n : Nat) :
  gbar S (engelerWithNumerals.numeral n) = chiNum engelerWithNumerals S n := by
  simp [gbar, numeralFingerprint_numeral, chiBundle_singleton]

theorem gbar_scottContinuous (S : Set Nat) :
  IsScottContinuous (gbar S) := by
  change IsScottContinuous (chiBundle S comp numeralFingerprint)
  exact numeralFingerprint_scottContinuous.comp (chiBundle_scottContinuous S)

/-- Scott-open containing `?False?` but not `? top ?`. -/
def lemma_35_boolOpenBot : Set (Set Nat) :=
  {X | churchBoolSepWitness engelerPair in X}

theorem lemma_35_boolOpenBot_scottOpen :
  ScottOpen lemma_35_boolOpenBot :=
  scottOpen_mem (churchBoolSepWitness engelerPair)

theorem lemma_35_boolOpenBot_spec :
  engelerWithNumerals.boolBot in lemma_35_boolOpenBot /\

```

```

    engelerWithNumerals.boolTop notin lemma_35_boolOpenBot := by
  constructor
  * simp [lemma_35_boolOpenBot, engelerWithNumerals] using
    churchFalse_interp_mem_sep engelerPair engelerPair_injective
  * simp [lemma_35_boolOpenBot, engelerWithNumerals] using
    churchTrue_interp_not_mem_sep engelerPair engelerPair_injective

noncomputable def churchNotGraph : Set Nat :=
  interpClosed (engelerReflexiveDcpo engelerPair engelerPair_injective) churchNot

theorem churchNotGraph_app_boolTop :
  engelerWithNumerals.funMap churchNotGraph engelerWithNumerals.boolTop =
  engelerWithNumerals.boolBot := by
  simp [churchNotGraph, engelerWithNumerals, ReflexiveDcpo.app] using
    churchNot_interp_true engelerPair engelerPair_injective

theorem churchNotGraph_app_boolBot :
  engelerWithNumerals.funMap churchNotGraph engelerWithNumerals.boolBot =
  engelerWithNumerals.boolTop := by
  simp [churchNotGraph, engelerWithNumerals, ReflexiveDcpo.app] using
    churchNot_interp_false engelerPair engelerPair_injective

/-- Scott-open containing `? top ?` but not `?False?`, as the preimage of
`lemma_35_boolOpenBot` under `fun(?not ?)`.-/
noncomputable def lemma_35_boolOpenTop : Set (Set Nat) :=
  engelerWithNumerals.funMap churchNotGraph ~-1' lemma_35_boolOpenBot

theorem lemma_35_boolOpenTop_scottOpen :
  ScottOpen lemma_35_boolOpenTop :=
  scottOpen_preimage (engelerWithNumerals.fun_scott_pt churchNotGraph)
  lemma_35_boolOpenBot_scottOpen

theorem lemma_35_boolOpenTop_spec :
  engelerWithNumerals.boolTop in lemma_35_boolOpenTop /\
  engelerWithNumerals.boolBot notin lemma_35_boolOpenTop := by
  constructor
  * change churchBoolSepWitness engelerPair in
    engelerWithNumerals.funMap churchNotGraph engelerWithNumerals.boolTop
  rw [show engelerWithNumerals.funMap churchNotGraph
    engelerWithNumerals.boolTop = engelerWithNumerals.boolBot from
    churchNotGraph_app_boolTop]
  exact lemma_35_boolOpenBot_spec.1
  * intro hmem
  have h : churchBoolSepWitness engelerPair in engelerWithNumerals.boolTop := by
    change churchBoolSepWitness engelerPair in
    engelerWithNumerals.funMap churchNotGraph engelerWithNumerals.boolBot at hmem
  rwa [show engelerWithNumerals.funMap churchNotGraph
    engelerWithNumerals.boolBot = engelerWithNumerals.boolTop from
    churchNotGraph_app_boolBot] at hmem
  exact lemma_35_boolOpenBot_spec.2 h

/-- Scott-open `U_m = {X | m in ?(X)}` containing `?c_m?` and no other numeral. -/
def lemma_35_numeralOpen (m : Nat) : Set (Set Nat) :=
  numeralFingerprint ~-1' {Y : Set Nat | m in Y}

theorem lemma_35_numeralOpen_scottOpen (m : Nat) :
  ScottOpen (lemma_35_numeralOpen m) :=
  scottOpen_preimage numeralFingerprint_scottContinuous (scottOpen_mem m)

theorem lemma_35_numeralOpen_spec (m : Nat) :
  engelerWithNumerals.numeral m in lemma_35_numeralOpen m /\
  forall n, n != m -> engelerWithNumerals.numeral n notin lemma_35_numeralOpen m := by
  constructor

```

```

* change m in numeralFingerprint (engelerWithNumerals.numeral m)
  rw [numeralFingerprint_numeral]
  exact mem_singleton m
* intro n hne hmem
  change m in numeralFingerprint (engelerWithNumerals.numeral n) at hmem
  rw [numeralFingerprint_numeral] at hmem
  exact hne (mem_singleton_iff.mp hmem).symm

/-- Lemma 35(i), Engeler model only: `{?False?, ? top ?}` and `{?c_n?}` are
discrete in the Scott topology of `{(Nat)}`, and numerals are pairwise
distinct. -/
theorem lemma_35_i :
  (exists U V : Set (Set Nat), ScottOpen U /\ ScottOpen V /\
    engelerWithNumerals.boolTop in U /\ engelerWithNumerals.boolBot notin U /\
    engelerWithNumerals.boolBot in V /\ engelerWithNumerals.boolTop notin V) /\
  (forall m : Nat, exists W : Set (Set Nat), ScottOpen W /\
    engelerWithNumerals.numeral m in W /\
    forall n, n != m -> engelerWithNumerals.numeral n notin W) /\
  Function.Injective engelerWithNumerals.numeral :=
<|lemma_35_boolOpenTop, lemma_35_boolOpenBot,
  lemma_35_boolOpenTop_scottOpen, lemma_35_boolOpenBot_scottOpen,
  lemma_35_boolOpenTop_spec.1, lemma_35_boolOpenTop_spec.2,
  lemma_35_boolOpenBot_spec.1, lemma_35_boolOpenBot_spec.2>,
fun m => <|lemma_35_numeralOpen m, lemma_35_numeralOpen_scottOpen m,
  (lemma_35_numeralOpen_spec m).1, (lemma_35_numeralOpen_spec m).2>,
engelerWithNumerals.numeral_inj>

/-- Lemma 35(ii) on the Engeler model, without a pre-given extension.
`d_g = lam (gbar S)` and the retract yield the oracle. -/
theorem lemma_35_ii (S : Set Nat) :
  exists d : Set Nat, forall n,
    engelerWithNumerals.app d (engelerWithNumerals.numeral n) =
      chiNum engelerWithNumerals S n :=
<|engelerWithNumerals.lam (gbar S),
  fun n => lemma_35_ii_of_extension engelerWithNumerals S (gbar S)
  (gbar_scottContinuous S) (gbar_numeral S) n>

/-- Lemma 35 on `engelerWithNumerals` (Engeler-only; see `lemma_35_i`). -/
theorem lemma_35 :
  (exists U V : Set (Set Nat), ScottOpen U /\ ScottOpen V /\
    engelerWithNumerals.boolTop in U /\ engelerWithNumerals.boolBot notin U /\
    engelerWithNumerals.boolBot in V /\ engelerWithNumerals.boolTop notin V) /\
  (forall m : Nat, exists W : Set (Set Nat), ScottOpen W /\
    engelerWithNumerals.numeral m in W /\
    forall n, n != m -> engelerWithNumerals.numeral n notin W) /\
  Function.Injective engelerWithNumerals.numeral /\
  forall S : Set Nat, exists d : Set Nat, forall n,
    engelerWithNumerals.app d (engelerWithNumerals.numeral n) =
      chiNum engelerWithNumerals S n :=
<|lemma_35_i.1, lemma_35_i.2.1, lemma_35_i.2.2, lemma_35_ii>

end Scott2026

```

A.18 Scott2026/Engeler.lean

271 lines.

[Lean 4 source](#)

/-

Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.

```

-/

import Mathlib.Data.Finset.Basic
import Mathlib.Order.ScottContinuity
import Scott2026.Domain

/-!
# The Engeler model (Proposition 29) and numerals (Definition 32)
-/

open Set

namespace Scott2026

variable {E : Type*}

/-- Application in the Engeler model (Proposition 29). -/
def engelerApp [DecidableEq E] (pair : Finset E × E → E) (F X : Set E) : Set E :=
  {q | exists K : Finset E, (K : Set E) ⊆ X ∧ pair (K, q) in F}

/-- Abstraction in the Engeler model (Proposition 29). -/
def engelerLam [DecidableEq E] (pair : Finset E × E → E) (f : Set E → Set E) : Set E :=
  {x | exists K : Finset E, exists q in f (K), x = pair (K, q)}

/-- Proposition 29, retract identity: `lam f * X = ? {f K | K ⊆ X finite}`
when `pair` is injective. -/
theorem engelerApp_lam [DecidableEq E] (pair : Finset E × E → E)
  (hpair : Function.Injective pair) (f : Set E → Set E) (X : Set E) :
  engelerApp pair (engelerLam pair f) X = {q | exists K : Finset E, (K : Set E) ⊆ X
    ∧ q in f (K)} := by
  ext q
  simp only [engelerApp, engelerLam, Set.mem_setOf_eq]
  constructor
  * intro <K, hK, hx>
    obtain <K', q', hq', heq> := hx
    have hKK : (K, q) = (K', q') := hpair heq
    cases hKK
    exact <K, hK, hq'>
  * intro <K, hK, hq>
    exact <K, hK, <K, q, hq, rfl>>

/-- A map `Set E → Set E` is determined by its values on finite sets iff it
preserves directed unions of finite subsets. This is the Scott-continuity
criterion used in Proposition 29. -/
def DeterminedByFinite (f : Set E → Set E) : Prop :=
  forall X : Set E, f X = {q | exists K : Finset E, (K : Set E) ⊆ X ∧ q in f (K)}

/-- Proposition 29: if `f` is determined by finite sets, then `fun comp lam = id`. -/
theorem prop29_retract [DecidableEq E] (pair : Finset E × E → E)
  (hpair : Function.Injective pair) {f : Set E → Set E} (hf : DeterminedByFinite f) (X :
  Set E) :
  engelerApp pair (engelerLam pair f) X = f X := by
  rw [engelerApp_lam pair hpair, hf X]

/-- Determined-by-finite maps are monotone. -/
theorem DeterminedByFinite.monotone {f : Set E → Set E} (hf : DeterminedByFinite f) :
  Monotone f := by
  intro X Y hXY q hq
  have hq' : q in {q | exists K : Finset E, (K : Set E) ⊆ X ∧ q in f (K)} :=
    by
      simpa [hf X] using hq
  obtain <K, hK, hqK> := hq'

```

```

have : q in {q | exists K : Finset E, (K : Set E) subseq Y /\ q in f (K)} :=
  <K, hK.trans hXY, hqK>
simp [hf Y] using this

/-- Scott-continuous maps `Set E -> Set E` are determined by finite sets. -/
theorem determinedByFinite_of_scottContinuous {f : Set E -> Set E}
  (hf : ScottContinuous f) : DeterminedByFinite f := by
  intro X
  let ? : Set (Set E) := {S | S.Finite /\ S subseq X}
  have hdir := finite_subsets_directed X
  have hne : ?.Nonempty := <{}, finite_empty, empty_subset _>
  have hlub : IsLUB ? X := by
    refine <?upper, ?least>
    * intro S hS
      exact hS.2
    * intro T hT
      rw [← sUnion_finite_subsets X]
      intro x hx
      obtain <S, hS, hxS> := (mem_sUnion.mp hx)
      exact hT hS hxS
  have hsup : ?_0 (f '' ?) = f X := by
    simp [sSup_eq_sUnion] using (hf hne hdir hlub).sSup_eq
  ext q
  constructor
  * intro hq
    have : q in ?_0 (f '' ?) := by rwa [hsup]
    obtain <t, ht, hqt> := mem_sUnion.mp this
    obtain <S, hS, rfl> := (Set.mem_image _ _).mp ht
    refine <hS.1.toFinset, ?_, ?_>
    * simp [hS.1.coe_toFinset] using hS.2
    * simp [hS.1.coe_toFinset] using hqt
  * intro <K, hK, hq>
    have ht : f (K) in f '' ? := <K, <K.finite_toSet, hK>, rfl>
    have : q in ?_0 (f '' ?) := mem_sUnion.mpr <f (K), ht, hq>
    rwa [hsup] at this

/-- A finite set contained in the directed lub of `?` sits in some member
of `?` (Proposition 27). -/
theorem finset_subset_of_directed_isLUB {? : Set (Set E)} {X : Set E}
  (hne : ?.Nonempty) (hdir : DirectedOn (* <= *) ?) (hlub : IsLUB ? X)
  {K : Finset E} (hK : (K : Set E) subseq X) :
  exists Y in ?, (K : Set E) subseq Y :=
  prop27_wayBelow_finite K.finite_toSet hK hne hdir (le_of_eq hlub.sSup_eq.symm)

/-- Application is Scott-continuous in the argument, for each fixed function
graph `F`. -/
theorem engelerApp_scottContinuous_right [DecidableEq E]
  (pair : Finset E x E -> E) (F : Set E) :
  ScottContinuous (engelerApp pair F) := by
  intro ? hne hdir X hlub
  have hunion : ?_0 (engelerApp pair F '' ?) = engelerApp pair F X := by
    ext q
    constructor
    * intro hq
      obtain <Y, hY, hqY> := mem_sUnion.mp hq
      obtain <S, hS, rfl> := (mem_image _ _).mp hY
      obtain <K, hK, hp> := hqY
      exact <K, hK.trans (hlub.1 hS), hp>
    * intro hq
      obtain <K, hK, hp> := hq
      obtain <S, hS, hKS> := finset_subset_of_directed_isLUB hne hdir hlub hK
      exact mem_sUnion.mpr <engelerApp pair F S, mem_image_of_mem _ hS, <K, hKS, hp>>
  simp [sSup_eq_sUnion, hunion] using isLUB_sSup (engelerApp pair F '' ?)

```

```

/-- Application is Scott-continuous (in fact completely additive) in the
function graph, for each fixed argument `X`. -/
theorem engelerApp_scottContinuous_left [DecidableEq E]
  (pair : Finset E x E -> E) (X : Set E) :
  ScottContinuous (fun F => engelerApp pair F X) := by
  intro ? _hne _hdir G hlub
  have hunion : ?_0 ((fun F => engelerApp pair F X) '' ?) = engelerApp pair G X := by
  ext q
  constructor
  * intro hq
    obtain <Y, hY, hqY> := mem_sUnion.mp hq
    obtain <F, hF, rfl> := (mem_image _ _ _).mp hY
    obtain <K, hK, hp> := hqY
    exact <K, hK, hlub.1 hF hp>
  * intro hq
    obtain <K, hK, hp> := hq
    have : pair (K, q) in ?_0 ? := by
      rwa [ <- sSup_eq_sUnion, hlub.sSup_eq ]
    obtain <F, hF, hFp> := mem_sUnion.mp this
    exact mem_sUnion.mpr
      <engelerApp pair F X, mem_image_of_mem _ hF, <K, hK, hFp>>
  simp [sSup_eq_sUnion, hunion] using
  isLUB_sSup ((fun F => engelerApp pair F X) '' ?)

/-- Uncurried application `funMap := engelerApp pair` is Scott-continuous as a
map `?(E) -> (?(E) -> ?(E))` into the pointwise function space. -/
theorem engelerApp_scottContinuous [DecidableEq E]
  (pair : Finset E x E -> E) :
  ScottContinuous (engelerApp pair) := by
  intro ? hne hdir G hlub
  refine isLUB_pi.mpr fun X => ?_
  have himg : Function.eval X '' (engelerApp pair '' ?) =
    (fun F => engelerApp pair F X) '' ? := by
    rw [ <- image_comp ]
    rfl
  rw [himg]
  exact engelerApp_scottContinuous_left pair X hne hdir hlub

/-- Abstraction preserves arbitrary suprema (complete additivity). Pair
injectivity is not required. -/
theorem engelerLam_sSup [DecidableEq E] (pair : Finset E x E -> E)
  (? : Set (Set E -> Set E)) :
  engelerLam pair (sSup ?) = ?_0 (engelerLam pair '' ?) := by
  ext x
  constructor
  * intro hx
    obtain <K, q, hq, rfl> := hx
    have hq' : q in ?_0 (Function.eval (K : Set E) '' ?) := by
      simp [sSup_apply_eq_sSup_image, sSup_eq_sUnion] using hq
    obtain <Y, hY, hqY> := mem_sUnion.mp hq'
    obtain <f, hf, rfl> := (mem_image _ _ _).mp hY
    exact mem_sUnion.mpr <engelerLam pair f, mem_image_of_mem _ hf, <K, q, hqY, rfl>>
  * intro hx
    obtain <Y, hY, hxY> := mem_sUnion.mp hx
    obtain <f, hf, rfl> := (mem_image _ _ _).mp hY
    obtain <K, q, hq, rfl> := hxY
    refine <K, q, ?_, rfl>
    have : q in sSup (Function.eval (K : Set E) '' ?) := by
      simp [sSup_eq_sUnion] using
        (mem_sUnion.mpr <f (K), mem_image_of_mem _ hf, hq> : q in ?_0 (Function.eval (K : Set
        E) '' ?))
    simp [sSup_apply_eq_sSup_image] using this

```



```

/-- Abstraction is Scott-continuous as a map  $[\lambda(E) \rightarrow \lambda(E)] \rightarrow \lambda(E)$ . -/
theorem engelerLam_scottContinuous [DecidableEq E]
  (pair : Finset E x E -> E) :
  ScottContinuous (engelerLam pair) := by
  intro ? _hne _hdir f hlub
  have hunion : ?_0 (engelerLam pair '' ?) = engelerLam pair f := by
    rw [ <- engelerLam_sSup, hlub.sSup_eq ]
  simp [sSup_eq_sUnion, hunion] using isLUB_sSup (engelerLam pair '' ?)

/-- Proposition 29 retract on Scott-continuous maps:  $\text{fun comp lam} = \text{id}$  on  $[\lambda(E) \rightarrow \lambda(E)]$ . -/
theorem engeler_retract_scott [DecidableEq E] (pair : Finset E x E -> E)
  (hpair : Function.Injective pair) {f : Set E -> Set E}
  (hf : ScottContinuous f) (X : Set E) :
  engelerApp pair (engelerLam pair f) X = f X :=
  prop29_retract pair hpair (determinedByFinite_of_scottContinuous hf) X

/-- The Engeler model  $(\lambda(E), \text{subseq}, *, \text{lam})$  as a reflexive dcpo. -/
def engelerReflexiveDcpo [DecidableEq E]
  (pair : Finset E x E -> E) (hpair : Function.Injective pair) :
  ReflexiveDcpo (Set E) where
  funMap := engelerApp pair
  lam := engelerLam pair
  fun_scott := engelerApp_scottContinuous pair
  lam_scott := engelerLam_scottContinuous pair
  fun_scott_pt := fun F => engelerApp_scottContinuous_right pair F
  retract := fun f hf => funext (engeler_retract_scott (f := f) pair hpair hf)

/-- Proposition 29 (paper):  $(\lambda(E), \text{subseq}, *, \text{lam})$  is a reflexive dcpo.
Application and abstraction are Scott-continuous, and  $\text{fun comp lam} = \text{id}$  on
Scott-continuous maps  $[\lambda(E) \rightarrow \lambda(E)]$ . The existing proposition_29 is the
weaker retract on DeterminedByFinite. -/
theorem proposition_29_full [DecidableEq E] (pair : Finset E x E -> E)
  (hpair : Function.Injective pair) :
  (engelerReflexiveDcpo pair hpair).funMap =
    (fun F X => engelerApp pair F X) /\
  (engelerReflexiveDcpo pair hpair).lam = engelerLam pair /\
  IsScottContinuous (engelerReflexiveDcpo pair hpair).funMap /\
  IsScottContinuous (engelerReflexiveDcpo pair hpair).lam /\
  (forall F, IsScottContinuous ((engelerReflexiveDcpo pair hpair).funMap F)) /\
  (forall f : Set E -> Set E, IsScottContinuous f ->
    (engelerReflexiveDcpo pair hpair).funMap
      ((engelerReflexiveDcpo pair hpair).lam f) = f) :=
  < rfl, rfl,
  (engelerReflexiveDcpo pair hpair).fun_scott,
  (engelerReflexiveDcpo pair hpair).lam_scott,
  (engelerReflexiveDcpo pair hpair).fun_scott_pt,
  (engelerReflexiveDcpo pair hpair).retract >

/-- Definition 32: a reflexive dcpo with numerals. We record the algebraic
interface (distinct Booleans, if/succ/pred/0?) without a particular
encoding of closed terms as domain elements. -/
structure ReflexiveDcpoWithNumerals (D : Type*) [CompleteLattice D]
  extends ReflexiveDcpo D where
  boolBot : D
  boolTop : D
  numeral : Nat -> D
  bool_ne : boolBot != boolTop
  numeral_inj : Function.Injective numeral

/-- Characteristic function of a set of numerals, valued in  $\{\text{False}, \text{top}\}$  (before Lemma 35).
- /

```

```

noncomputable def chiNum {D : Type*} [CompleteLattice D] (R : ReflexiveDcpoWithNumerals D)
  (S : Set Nat) (n : Nat) : D :=
  @ite D (n in S) (Classical.propDecidable _) R.boolTop R.boolBot

/-- Lemma 35(ii), given a Scott-continuous extension of `chi_A` off the numerals. -/
theorem lemma_35_ii_of_extension {D : Type*} [CompleteLattice D]
  (R : ReflexiveDcpoWithNumerals D) (S : Set Nat) (g : D → D)
  (hg : IsScottContinuous g) (hgS : forall n, g (R.numeral n) = chiNum R S n) (n : Nat) :
  R.app (R.lam g) (R.numeral n) = chiNum R S n := by
  rw [ReflexiveDcpo.app, R.retract g hg, hgS]

/-- Proposition 36: `S_1 <= S_2` via a numeral-to-numeral fun -term `f` and oracles. -/
def ManyOneLe {D : Type*} [CompleteLattice D] (R : ReflexiveDcpoWithNumerals D)
  (S_1 S_2 : Set Nat) : Prop :=
  exists f : Nat → Nat,
  exists d_1 d_2 : D,
  (forall n, R.app d_1 (R.numeral n) = chiNum R S_1 n) /\
  (forall n, R.app d_2 (R.numeral n) = chiNum R S_2 n) /\
  (forall n, R.app d_2 (R.numeral (f n)) = R.app d_1 (R.numeral n))

end Scott2026

```

A.19 Scott2026/EngelerVA.lean

803 lines.

Lean 4 source (lines 1–400)

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/

import Mathlib.Data.Finset.Sort
import Mathlib.Data.Nat.Pairing
import Scott2026.Engeler
import Scott2026.Oid

/-!
# Theorem 30: the Engeler model in `V^A`

The paper (CSL 2026, before Proposition 29) takes a set `E` with an injective
structure map `P_fin(E) x E → E`. The initial algebra of `P_fin x Id` is empty
and is not used. We construct such an `E` as `Nat` / `?`, internalize `*` and
`lam` on `P^A(check E)`, and prove the retract at Boolean value `top` by a
direct calculation on names. This is not Theorem 1(i), Definition 19 at `V^A`,
or an internal continuous lattice.
-/

universe u

namespace Scott2026

open AName

/-!
## The set `E` before Proposition 29
-/

/-- List encoding used to inject `List Nat` into `Nat`. The `+ 1` keeps the empty
list off the image of `Nat.pair`. -/
def listNatCode : List Nat → Nat

```

```

| [] => 0
| n :: ns => Nat.pair n (listNatCode ns) + 1

theorem listNatCode_injective : Function.Injective listNatCode := by
  intro xs
  induction xs with
  | nil =>
    intro ys h
    cases ys with
    | nil => rfl
    | cons b bs =>
      simp [listNatCode] at h
  | cons a as ih =>
    intro ys h
    cases ys with
    | nil =>
      simp [listNatCode] at h
    | cons b bs =>
      have hpair : Nat.pair a (listNatCode as) = Nat.pair b (listNatCode bs) :=
        Nat.succ_injective (by simp [listNatCode] using h)
      have hab := Nat.pair_eq_pair.mp hpair
      exact congr_arg_2 List.cons hab.1 (ih hab.2)

/-- Injective pairing `P_fin(Nat) x Nat -> Nat` (paper before Proposition 29). -/
def engelerPair (p : Finset Nat x Nat) : Nat :=
  Nat.pair (listNatCode (p.1.sort (* <= *))) p.2

theorem sort_finset_injective :
  Function.Injective (fun s : Finset Nat => s.sort (* <= *)) := by
  intro s t h
  apply Finset.ext
  intro x
  rw [ <- Finset.mem_sort (s := s) (r := (* <= *)) (a := x)]
  rw [show s.sort (* <= *) = t.sort (* <= *) from h]
  exact Finset.mem_sort (s := t) (r := (* <= *)) (a := x)

theorem engelerPair_injective : Function.Injective engelerPair := by
  intro p q h
  have hpq := Nat.pair_eq_pair.mp h
  have hlist : p.1.sort (* <= *) = q.1.sort (* <= *) :=
    listNatCode_injective hpq.1
  exact Prod.ext (sort_finset_injective hlist) hpq.2

/-- The set `E` of the paper, as a pre-set: von Neumann `?`. -/
def engelerE : PSet.{u} := PSet.omega

/-!
## Von Neumann numerals
-/

theorem ofNat_spec_sum.{v} (N : Nat) :
  forall n m, n + m = N ->
    (PSet.ofNat.{v} n in PSet.ofNat.{v} m <-> n < m) /\
    (PSet.Equiv (PSet.ofNat.{v} n) (PSet.ofNat.{v} m) <-> n = m) := by
  induction N using Nat.strongRecOn with
  | ind N ih =>
    have hmem : forall n m, n + m = N ->
      (PSet.ofNat.{v} n in PSet.ofNat.{v} m <-> n < m) := by
      intro n m hN
      cases m with
      | zero =>
        constructor
        * intro h

```

```

    simp [PSet.ofNat] at h
* intro h
  exact (Nat.not_lt_zero n h).elim
| succ m =>
  change PSet.ofNat.{v} n in insert (PSet.ofNat.{v} m) (PSet.ofNat.{v} m) <->
    n < m + 1
  rw [PSet.mem_insert_iff]
  have hspec := ih (n + m) (by omega) n m rfl
  constructor
* intro h
  rcases h with hE | hM
  * exact (hspec.2.mp hE) |> Nat.lt_succ_self m
  * exact Nat.lt_succ_of_lt (hspec.1.mp hM)
* intro h
  rcases (le_iff_lt_or_eq.mp (Nat.lt_succ_iff.mp h)) with hlt | heq
  * exact Or.inr (hspec.1.mpr hlt)
  * exact Or.inl (hspec.2.mpr heq)
have hequiv : forall n m, n + m = N ->
  (PSet.Equiv (PSet.ofNat.{v} n) (PSet.ofNat.{v} m) <-> n = m) := by
  intro n m hN
  constructor
* intro hEqv
  by_contra hne
  rcases Nat.lt_or_gt_of_ne hne with hlt | hgt
  * have hin : PSet.ofNat.{v} n in PSet.ofNat.{v} m :=
    (hmem n m hN).mpr hlt
    exact PSet.mem_irrefl _
    ((@PSet.Mem.congr_right (PSet.ofNat.{v} n) (PSet.ofNat.{v} m) hEqv
      (PSet.ofNat.{v} n)).mpr hin)
  * have hin : PSet.ofNat.{v} m in PSet.ofNat.{v} n :=
    (hmem m n (by omega)).mpr hgt
    exact PSet.mem_irrefl _
    ((@PSet.Mem.congr_right (PSet.ofNat.{v} m) (PSet.ofNat.{v} n) hEqv.symm
      (PSet.ofNat.{v} m)).mpr hin)
* rintro rfl
  exact PSet.Equiv.rfl (x := PSet.ofNat.{v} n)
exact fun n m hN => <hmem n m hN, hequiv n m hN>

theorem ofNat_mem_iff {n m : Nat} : PSet.ofNat.{u} n in PSet.ofNat.{u} m <-> n < m :=
  (ofNat_spec_sum.{u} (n + m) n m rfl).1

theorem ofNat_equiv_iff {n m : Nat} :
  PSet.Equiv (PSet.ofNat.{u} n) (PSet.ofNat.{u} m) <-> n = m :=
  (ofNat_spec_sum.{u} (n + m) n m rfl).2

/-!
## Check of equivalent pre-sets
-/

theorem eqB_check_of_equiv {A : Type u} [CompleteBooleanAlgebra A] :
  forall {x y : PSet.{u}}, PSet.Equiv x y ->
    eqB (check (A := A) x) (check y) = top := by
  intro x
  induction x with
  | mk a f ih =>
    intro y h
    cases y with
    | mk b g =>
      rw [eqB_eq_subset]
      refine inf_eq_top_iff.mpr <?fwd, ?bwd>
      * rw [check_mk, subsetB_mk]
        refine iInf_eq_top.mpr fun i => himp_eq_top_iff.mpr ?_
        obtain <j, hij> := h.1 i

```

```

    have hch : eqB (check (A := A) (f i)) (check (g j)) = top := ih i hij
    rw [check_mk (A := A), memB_mk]
    have : ( top : A) <= eqB (check (A := A) (f i)) (check (g j)) sqcap top := by
      rw [hch, top_inf_eq]
    exact this.trans
      (le_iSup (fun k => eqB (check (A := A) (f i)) (check (g k)) sqcap ( top : A)) j)
* rw [check_mk, subsetB_mk]
  refine iInf_eq_top.mpr fun j => himp_eq_top_iff.mpr ?_
  obtain <i, hji> := h.2 j
  have hch : eqB (check (A := A) (f i)) (check (g j)) = top := ih i hji
  rw [eqB_comm (x := check (A := A) (f i)) (y := check (g j))] at hch
  rw [check_mk (A := A), memB_mk]
  have : ( top : A) <= eqB (check (A := A) (g j)) (check (f i)) sqcap top := by
    rw [hch, top_inf_eq]
  exact this.trans
    (le_iSup (fun k => eqB (check (A := A) (g j)) (check (f k)) sqcap ( top : A)) i)

theorem memB_check_of_mem {A : Type u} [CompleteBooleanAlgebra A]
  {x y : PSet.{u}} (h : x in y) :
  memB (check (A := A) x) (check y) = top := by
  obtain <i, hi> := h
  cases y with
  | mk b g =>
    rw [check_mk, memB_mk]
    exact top_unique
      ((eqB_check_of_equiv (A := A) hi).ge.trans
        (le_iSup_of_le i (le_inf le_rfl le_top)))

/-!
## Finite subsets of `?` as pre-sets
-/

/-- Finite subset of `?` indexed by the elements of `K`. -/
def finsetPSet (K : Finset Nat) : PSet.{u} :=
  PSet.mk (ULift.{u} {n : Nat // n in K}) (fun n => PSet.ofNat n.down.val)

theorem orderEmb_symm_apply (K : Finset Nat) (n : {n : Nat // n in K}) :
  K.orderEmbOfFin rfl ((K.orderIsoOfFin rfl).symm n) = n.1 :=
  (Finset.coe_orderIsoOfFin_apply K rfl ((K.orderIsoOfFin rfl).symm n)).trans
  (congrArg Subtype.val ((K.orderIsoOfFin rfl).apply_symm_apply n))

theorem finsetPSet_equiv_enum (K : Finset Nat) :
  PSet.Equiv.{u, u} (finsetPSet K)
  (pfinEnum (fun i : Fin K.card => PSet.ofNat.{u} (K.orderEmbOfFin rfl i))) :=
  <fun i =>
    <<(K.orderIsoOfFin rfl).symm i.down>, by
    change PSet.Equiv.{u, u} (PSet.ofNat.{u} i.down.val)
    (PSet.ofNat.{u} (K.orderEmbOfFin rfl ((K.orderIsoOfFin rfl).symm i.down)))
    rw [orderEmb_symm_apply K i.down]>,
  fun j =>
    <<K.orderEmbOfFin rfl j.down, K.orderEmbOfFin_mem rfl j.down>,
    PSet.Equiv.refl (PSet.ofNat.{u} (K.orderEmbOfFin rfl j.down))>>

theorem finsetPSet_mem_pfin (K : Finset Nat) :
  finsetPSet K in pfin (PSet.omega : PSet.{u}) := by
  refine <<K.card, <fun i => <K.orderEmbOfFin rfl i>>>, ?_
  simpa [pfin, PSet.omega, pfinEnum] using finsetPSet_equiv_enum K

variable {A : Type u} [CompleteBooleanAlgebra A]

theorem memB_check_ofNat_omega (n : Nat) :
  memB (check (A := A) (PSet.ofNat n)) (check PSet.omega) = top :=
  memB_check_of_mem (A := A) <<n>, PSet.Equiv.rfl>

```

```

theorem subsetB_finsetPSet (K : Finset Nat) (X : AName.{u} A) :
  subsetB (check (A := A) (finsetPSet K)) X =
    ? n : {n : Nat // n in K}, memB (check (PSet.ofNat n.1)) X := by
  rw [finsetPSet, check_mk, subsetB_mk]
  refine le_antisymm ?_ ?_
  * refine le_iInf fun n => ?_
    have := iInf_le (fun i : ULift.{u} {n : Nat // n in K} =>
      (top : A) ? memB (check (PSet.ofNat i.down.val)) X) <n>
    simp [top_himp] using this
  * refine le_iInf fun i => ?_
    rw [top_himp]
    exact iInf_le (fun n : {n : Nat // n in K} =>
      memB (check (PSet.ofNat n.1)) X) i.down

/-- Proposition 3 moves checked finite subsets into `P_fin^A(check ?)`.-/
theorem memB_finsetPSet_pfinB (K : Finset Nat) :
  memB (check (A := A) (finsetPSet K)) (pfinB (check PSet.omega)) = top := by
  have hcheck : memB (check (A := A) (finsetPSet K)) (check (pfin PSet.omega)) = top :=
    memB_check_of_mem (A := A) (finsetPSet_mem_pfin K)
  have hprop3 : eqB (pfinB (check (A := A) PSet.omega)) (check (pfin PSet.omega)) = top :=
    proposition_3 (A := A) PSet.omega
  rw [eqB_top_memB_right (x := pfinB (check (A := A) PSet.omega))
    (y := check (pfin PSet.omega)) hprop3]
  exact hcheck

/-!
## Check of the classical pairing
-/

/-- Check of the classical Engeler pairing on a finite set and an atom. -/
noncomputable def pairApplyB (K : Finset Nat) (q : Nat) : AName.{u} A :=
  check (PSet.ofNat (engelerPair (K, q)))

theorem pairApplyB_mem_omega (K : Finset Nat) (q : Nat) :
  memB (pairApplyB (A := A) K q) (check PSet.omega) = top :=
  memB_check_ofNat_omega (engelerPair (K, q))

/-- Kuratowski pair of a checked finite subset and a checked atom. -/
noncomputable def pairDomainB (K : Finset Nat) (q : Nat) : AName.{u} A :=
  opairB (check (finsetPSet K)) (check (PSet.ofNat q))

theorem pairDomainB_mem_prod_check (K : Finset Nat) (q : Nat) :
  memB (pairDomainB (A := A) K q)
    (prodB (check (pfin PSet.omega)) (check PSet.omega)) = top := by
  rw [pairDomainB, memB_opairB_prodB]
  exact inf_eq_top_iff.mpr
    <memB_check_of_mem (A := A) (finsetPSet_mem_pfin K), memB_check_ofNat_omega q>

/-- By Proposition 3, the same pair lands in `P_fin^A(check ?) x_A check ?`. -/
theorem pairDomainB_mem_prod_pfinB (K : Finset Nat) (q : Nat) :
  memB (pairDomainB (A := A) K q)
    (prodB (pfinB (check PSet.omega)) (check PSet.omega)) = top := by
  rw [pairDomainB, memB_opairB_prodB]
  exact inf_eq_top_iff.mpr <memB_finsetPSet_pfinB K, memB_check_ofNat_omega q>

theorem pairApplyB_eqB_iff [Nontrivial A] {K_1 K_2 : Finset Nat} {q_1 q_2 : Nat} :
  eqB (A := A) (pairApplyB K_1 q_1) (pairApplyB K_2 q_2) = top <->
    K_1 = K_2 /\ q_1 = q_2 := by
  constructor
  * intro h
  have hequiv :=
    (check_atomic (A := A) (PSet.ofNat (engelerPair (K_1, q_1))))

```

```

        (PSet.ofNat (engelerPair (K_2, q_2))))).1.mp h
    exact Prod.mk_inj.mp (engelerPair_injective (ofNat_equiv_iff.mp hequiv))
* rintro <rfl, rfl>
    exact eqB_self (A := A) _

theorem ofNat_mem_finsetPSet {K : Finset Nat} {n : Nat} :
  PSet.ofNat.{u} n in finsetPSet K <-> n in K := by
  constructor
* intro hmem
  obtain <<m, hm>, hmn> := hmem
  change PSet.Equiv (PSet.ofNat.{u} n) (PSet.ofNat.{u} m) at hmn
  exact ofNat_equiv_iff.mp hmn |> hm
* intro hn
  exact <<n, hn>, PSet.Equiv.rfl>

/-- Injectivity of the checked pairing on crisp arguments, via `eqB_opairB`. -/
theorem pairDomainB_injective [Nontrivial A] {K_1 K_2 : Finset Nat} {q_1 q_2 : Nat}
  (h : eqB (A := A) (pairDomainB K_1 q_1) (pairDomainB K_2 q_2) = top) :
  K_1 = K_2 /\ q_1 = q_2 := by
  have hsplit :
    eqB (A := A) (check (finsetPSet K_1)) (check (finsetPSet K_2)) sqcap
    eqB (check (PSet.ofNat q_1)) (check (PSet.ofNat q_2)) = top := by
    rwa [pairDomainB, pairDomainB, eqB_opairB] at h
  have hq : q_1 = q_2 :=
    ofNat_equiv_iff.mp
    ((check_atomic (A := A) (PSet.ofNat q_1) (PSet.ofNat q_2)).1.mp
    (top_unique (hsplit.ge.trans inf_le_right)))
  have hK : PSet.Equiv (finsetPSet K_1) (finsetPSet K_2) :=
    (check_atomic (A := A) (finsetPSet K_1) (finsetPSet K_2)).1.mp
    (top_unique (hsplit.ge.trans inf_le_left))
  refine <?_, hq>
  ext n
  rw [ <- ofNat_mem_finsetPSet (K := K_1) (n := n),
    <- ofNat_mem_finsetPSet (K := K_2) (n := n) ]
  exact PSet.equiv_iff_mem.mp hK

/-- The checked pairing is an injective map on crisp elements of
`P_fin^A(check E) x_A check E` (Proposition 3 + `eqB_opairB`). -/
theorem theorem_30_pair_injective [Nontrivial A] {K_1 K_2 : Finset Nat} {q_1 q_2 : Nat}
  (h : eqB (A := A) (pairApplyB K_1 q_1) (pairApplyB K_2 q_2) = top) :
  eqB (A := A) (pairDomainB K_1 q_1) (pairDomainB K_2 q_2) = top := by
  obtain <rfl, rfl> := (pairApplyB_eqB_iff (A := A)).mp h
  exact eqB_self (A := A) _

/-!
## Internal `lam` and `*` on names
-/

/-- Characteristic canonical index of a finite set of numerals. -/
noncomputable def finsetToPowerIdx (K : Finset Nat) :
  (powerB (check (A := A) PSet.omega)).idx :=
  restrictPowerIdx (check (finsetPSet K)) (check (A := A) PSet.omega)

noncomputable def finsetToCanonical (K : Finset Nat) :
  CanonicalPowerIdx (check (A := A) PSet.omega) :=
  normalizePowerIdx (check (A := A) PSet.omega) (finsetToPowerIdx (A := A) K)

/-- Boolean value of `exists K finite, q in f(K)` along ground finite sets. -/
noncomputable def finiteApproxPred
  (f : CanonicalPowerIdx (check (A := A) PSet.omega) ->
  CanonicalPowerIdx (check (A := A) PSet.omega))
  (X q : AName.{u} A) : A :=
  bigcup K : Finset Nat, bigcup n : Nat,

```

```

eqB q (check (PSet.ofNat n)) sqcap
  subsetB (check (finsetPSet K)) X sqcap
  memB (check (PSet.ofNat n))
    ((powerB (check (A := A) PSet.omega)).child (f (finsetToCanonical (A := A) K)).1)

theorem finiteApproxPred_congr
  (f : CanonicalPowerIdx (check (A := A) PSet.omega) ->
    CanonicalPowerIdx (check (A := A) PSet.omega))
  (X q q' : AName.{u} A) :
  eqB q q' sqcap finiteApproxPred (A := A) f X q <=
    finiteApproxPred (A := A) f X q' := by
  unfold finiteApproxPred
  rw [inf_iSup_eq]
  refine iSup_le fun K => ?_
  rw [inf_iSup_eq]
  refine iSup_le fun n => ?_
  refine le_iSup_of_le K (le_iSup_of_le n ?_)
  have htrans : eqB q q' sqcap eqB q (check (PSet.ofNat n)) <=
    eqB q' (check (PSet.ofNat n)) := by
    rw [eqB_comm (x := q) (y := q')]
    exact eqB_trans q' q (check (PSet.ofNat n))
  refine le_inf (le_inf ?_ (inf_le_of_right_le (inf_le_of_left_le inf_le_right)))
    (inf_le_of_right_le inf_le_right)
  exact htrans.trans'
    (le_inf inf_le_left (inf_le_of_right_le (inf_le_of_left_le inf_le_left)))

/-- Internal application:
`F * X = {q | exists K in P_fin^A(check E). K subseq X /\ (K,q) in F}` ,
interpreted on ground finite sets (Proposition 3). -/
noncomputable def engelerAppPred (F X q : AName.{u} A) : A :=
  bigcup K : Finset Nat, bigcup n : Nat,
    eqB q (check (PSet.ofNat n)) sqcap
      subsetB (check (finsetPSet K)) X sqcap
        memB (pairApplyB (A := A) K n) F

theorem engelerAppPred_congr (F X q q' : AName.{u} A) :
  eqB q q' sqcap engelerAppPred F X q <= engelerAppPred F X q' := by
  unfold engelerAppPred
  rw [inf_iSup_eq]
  refine iSup_le fun K => ?_
  rw [inf_iSup_eq]
  refine iSup_le fun n => ?_
  refine le_iSup_of_le K (le_iSup_of_le n ?_)
  have htrans : eqB q q' sqcap eqB q (check (PSet.ofNat n)) <=
    eqB q' (check (PSet.ofNat n)) := by
    rw [eqB_comm (x := q) (y := q')]
    exact eqB_trans q' q (check (PSet.ofNat n))
  refine le_inf (le_inf ?_ (inf_le_of_right_le (inf_le_of_left_le inf_le_right)))
    (inf_le_of_right_le inf_le_right)
  exact htrans.trans'
    (le_inf inf_le_left (inf_le_of_right_le (inf_le_of_left_le inf_le_left)))

Lean 4 source (lines 401–800)

    (le_inf inf_le_left (inf_le_of_right_le (inf_le_of_left_le inf_le_left)))

noncomputable def engelerAppName (F X : AName.{u} A) : AName.{u} A :=
  sepB (check PSet.omega) (engelerAppPred F X)

theorem memB_engelerAppName (F X q : AName.{u} A) :
  memB q (engelerAppName F X) =
    memB q (check PSet.omega) sqcap engelerAppPred F X q :=
  memB_sepB q (check PSet.omega) (engelerAppPred F X) (engelerAppPred_congr F X)

/-- Internal abstraction: `lam(f) = {(K,q) | q in f(K)}`. -/

```



```

noncomputable def engelerLamPred
  (f : CanonicalPowerIdx (check (A := A) PSet.omega) ->
    CanonicalPowerIdx (check (A := A) PSet.omega))
  (x : AName.{u} A) : A :=
  bigcup K : Finset Nat, bigcup n : Nat,
  eqB x (pairApplyB (A := A) K n) sqcap
  memB (check (PSet.ofNat n))
  ((powerB (check (A := A) PSet.omega)).child
    (f (finsetToCanonical (A := A) K)).1)

theorem engelerLamPred_congr
  (f : CanonicalPowerIdx (check (A := A) PSet.omega) ->
    CanonicalPowerIdx (check (A := A) PSet.omega))
  (x x' : AName.{u} A) :
  eqB x x' sqcap engelerLamPred (A := A) f x <= engelerLamPred (A := A) f x' := by
  unfold engelerLamPred
  rw [inf_iSup_eq]
  refine iSup_le fun K => ?_
  rw [inf_iSup_eq]
  refine iSup_le fun n => ?_
  refine le_iSup_of_le K (le_iSup_of_le n ?_)
  have htrans : eqB x x' sqcap eqB x (pairApplyB (A := A) K n) <=
    eqB x' (pairApplyB (A := A) K n) := by
    rw [eqB_comm (x := x) (y := x')]
    exact eqB_trans x' x (pairApplyB (A := A) K n)
  exact le_inf
  (htrans.trans' (le_inf inf_le_left (inf_le_of_right_le inf_le_left)))
  (inf_le_of_right_le inf_le_right)

noncomputable def engelerLamName
  (f : CanonicalPowerIdx (check (A := A) PSet.omega) ->
    CanonicalPowerIdx (check (A := A) PSet.omega)) : AName.{u} A :=
  sepB (check PSet.omega) (engelerLamPred (A := A) f)

theorem memB_engelerLamName
  (f : CanonicalPowerIdx (check (A := A) PSet.omega) ->
    CanonicalPowerIdx (check (A := A) PSet.omega))
  (x : AName.{u} A) :
  memB x (engelerLamName (A := A) f) =
  memB x (check PSet.omega) sqcap engelerLamPred (A := A) f x :=
  memB_sepB x (check PSet.omega) (engelerLamPred (A := A) f)
  (engelerLamPred_congr (A := A) f)

theorem subsetB_sepB_omega (phi : AName.{u} A -> A) :
  subsetB (sepB (check (A := A) PSet.omega) phi) (check PSet.omega) = top := by
  refine iInf_eq_top.mpr fun i => himp_eq_top_iff.mpr ?_
  have hle : (sepB (check (A := A) PSet.omega) phi).val i <=
    (check (A := A) PSet.omega).val i := inf_le_left
  exact hle.trans (val_le_memB (check (A := A) PSet.omega) i)

/-!
## Canonical-carrier operations
-/

noncomputable def engelerLamVA
  (f : CanonicalPowerIdx (check (A := A) PSet.omega) ->
    CanonicalPowerIdx (check (A := A) PSet.omega)) :
  CanonicalPowerIdx (check (A := A) PSet.omega) :=
  <restrictPowerIdx (engelerLamName (A := A) f) (check (A := A) PSet.omega),
  restrictPowerIdx_isCanonical _ _>

noncomputable def engelerAppVA
  (F X : CanonicalPowerIdx (check (A := A) PSet.omega)) :

```

```

    CanonicalPowerIdx (check (A := A) PSet.omega) :=
<restrictPowerIdx
  (engelerAppName ((powerB (check (A := A) PSet.omega)).child F.1)
    ((powerB (check (A := A) PSet.omega)).child X.1))
  (check (A := A) PSet.omega),
  restrictPowerIdx_isCanonical _ _>

theorem engelerLamVA_eqB
  (f : CanonicalPowerIdx (check (A := A) PSet.omega) ->
    CanonicalPowerIdx (check (A := A) PSet.omega)) :
  eqB ((powerB (check (A := A) PSet.omega)).child (engelerLamVA (A := A) f).1)
    (engelerLamName (A := A) f) = top := by
  rw [eqB_comm]
  exact eqB_restrictName_of_subsetB _ _ (subsetB_sepB_omega _)

theorem engelerAppVA_eqB
  (F X : CanonicalPowerIdx (check (A := A) PSet.omega)) :
  eqB ((powerB (check (A := A) PSet.omega)).child (engelerAppVA (A := A) F X).1)
    (engelerAppName ((powerB (check (A := A) PSet.omega)).child F.1)
      ((powerB (check (A := A) PSet.omega)).child X.1)) = top := by
  rw [eqB_comm]
  exact eqB_restrictName_of_subsetB _ _ (subsetB_sepB_omega _)

/-- `A`-valued determined-by-finite condition: `f(X)` is the join of `f(K)`
over ground finite `K` subseteq `X`. This is the Proposition 29 criterion, internalized
at Boolean value `top`. -/
def DeterminedByFiniteVA
  (f : CanonicalPowerIdx (check (A := A) PSet.omega) ->
    CanonicalPowerIdx (check (A := A) PSet.omega)) : Prop :=
  forall X : CanonicalPowerIdx (check (A := A) PSet.omega),
  eqB ((powerB (check (A := A) PSet.omega)).child (f X).1)
    (sepB (check PSet.omega) (finiteApproxPred (A := A) f
      ((powerB (check (A := A) PSet.omega)).child X.1))) = top

/-!
## Retract calculation
-/

theorem eqB_check_ofNat_bot [Nontrivial A] {n m : Nat} (hne : n != m) :
  eqB (A := A) (check (PSet.ofNat n)) (check (PSet.ofNat m)) = False :=
  (check_atomic (A := A) (PSet.ofNat n) (PSet.ofNat m)).2.1.mpr
  (mt ofNat_equiv_iff.mp hne)

theorem memB_pairApplyB_lam
  (f : CanonicalPowerIdx (check (A := A) PSet.omega) ->
    CanonicalPowerIdx (check (A := A) PSet.omega))
  (K : Finset Nat) (n : Nat) :
  memB (pairApplyB (A := A) K n) (engelerLamName (A := A) f) =
  memB (check (PSet.ofNat n))
    ((powerB (check (A := A) PSet.omega)).child
      (f (finsetToCanonical (A := A) K)).1) := by
  rw [memB_engelerLamName, pairApplyB_mem_omega, top_inf_eq]
  unfold engelerLamPred
  refine le_antisymm ?le ?ge
  * refine iSup_le fun K' => iSup_le fun n' => ?_
    rcases subsingleton_or_nontrivial A with hA | hA
  * exact (Subsingleton.elim (a := A) _ _).le
  * have : Nontrivial A := hA
    cases eq_or_ne (engelerPair (K, n)) (engelerPair (K', n')) with
    | inl hpair =>
      obtain <rfl, rfl> := Prod.mk_inj.mp (engelerPair_injective hpair)
      exact inf_le_right
    | inr hne =>

```

```

      have hbot : eqB (A := A) (pairApplyB K n) (pairApplyB K' n') = False :=
        eqB_check_ofNat_bot (A := A) hne
      rw [hbot, bot_inf_eq]
      exact bot_le (a := A)
* refine le_iSup_of_le K (le_iSup_of_le n ?_)
      rw [eqB_self (A := A) (pairApplyB K n), top_inf_eq]

theorem memB_check_ofNat_app_lam
  (f : CanonicalPowerIdx (check (A := A) PSet.omega) ->
    CanonicalPowerIdx (check (A := A) PSet.omega))
  (X : CanonicalPowerIdx (check (A := A) PSet.omega))
  (n : Nat) :
  memB (check (PSet.ofNat n))
    (engelerAppName (engelerLamName (A := A) f)
      ((powerB (check (A := A) PSet.omega)).child X.1)) =
  bigcup K : Finset Nat,
    subsetB (check (finsetPSet K))
      ((powerB (check (A := A) PSet.omega)).child X.1) sqcap
    memB (check (PSet.ofNat n))
      ((powerB (check (A := A) PSet.omega)).child
        (f (finsetToCanonical (A := A) K)).1) := by
  rw [memB_engelerAppName, memB_check_ofNat_omega, top_inf_eq]
  unfold engelerAppPred
  refine le_antisymm ?le ?ge
* refine iSup_le fun K => iSup_le fun m => ?_
  rcases subsingleton_or_nontrivial A with hA | hA
* exact (Subsingleton.elim (a := A) _ _).le
* have : Nontrivial A := hA
  cases eq_or_ne n m with
  | inl hnm =>
    subst hnm
    rw [memB_pairApplyB_lam]
    exact le_iSup_of_le K
      (le_inf (inf_le_of_left_le inf_le_right) inf_le_right)
  | inr hne =>
    have hbot : eqB (A := A) (check (PSet.ofNat n)) (check (PSet.ofNat m)) = False :=
      eqB_check_ofNat_bot (A := A) hne
    rw [hbot]
    simp only [bot_inf_eq]
    exact bot_le (a := A)
* refine iSup_le fun K => ?_
  refine le_iSup_of_le K (le_iSup_of_le n ?_)
  rw [memB_pairApplyB_lam, eqB_self (A := A) (check (PSet.ofNat n)), top_inf_eq]

theorem finiteApproxPred_check_ofNat
  (f : CanonicalPowerIdx (check (A := A) PSet.omega) ->
    CanonicalPowerIdx (check (A := A) PSet.omega))
  (X : CanonicalPowerIdx (check (A := A) PSet.omega))
  (n : Nat) :
  finiteApproxPred (A := A) f
    ((powerB (check (A := A) PSet.omega)).child X.1)
    (check (PSet.ofNat n)) =
  bigcup K : Finset Nat,
    subsetB (check (finsetPSet K))
      ((powerB (check (A := A) PSet.omega)).child X.1) sqcap
    memB (check (PSet.ofNat n))
      ((powerB (check (A := A) PSet.omega)).child
        (f (finsetToCanonical (A := A) K)).1) := by
  unfold finiteApproxPred
  refine le_antisymm ?le ?ge
* refine iSup_le fun K => iSup_le fun m => ?_
  rcases subsingleton_or_nontrivial A with hA | hA
* exact (Subsingleton.elim (a := A) _ _).le

```

```

* have : Nontrivial A := hA
cases eq_or_ne n m with
| inl hnm =>
  subst hnm
  exact le_iSup_of_le K
    (le_inf (inf_le_of_left_le inf_le_right) inf_le_right)
| inr hne =>
  have hbot : eqB (A := A) (check (PSet.ofNat n)) (check (PSet.ofNat m)) = False :=
    eqB_check_ofNat_bot (A := A) hne
  rw [hbot]
  simp only [bot_inf_eq]
  exact bot_le (a := A)
* refine iSup_le fun K =>
  le_iSup_of_le K (le_iSup_of_le n ?_)
  rw [eqB_self (A := A) (check (PSet.ofNat n)), top_inf_eq]

theorem memB_sepB_finiteApprox
  (f : CanonicalPowerIdx (check (A := A) PSet.omega) ->
    CanonicalPowerIdx (check (A := A) PSet.omega))
  (X : CanonicalPowerIdx (check (A := A) PSet.omega))
  (n : Nat) :
  memB (check (PSet.ofNat n))
    (sepB (check PSet.omega) (finiteApproxPred (A := A) f
      ((powerB (check (A := A) PSet.omega)).child X.1))) =
  bigcup K : Finset Nat,
  subsetB (check (finsetPSet K))
    ((powerB (check (A := A) PSet.omega)).child X.1) sqcap
    memB (check (PSet.ofNat n))
      ((powerB (check (A := A) PSet.omega)).child
        (f (finsetToCanonical (A := A) K)).1) := by
  rw [memB_sepB (check (PSet.ofNat n)) (check PSet.omega)
    (finiteApproxPred (A := A) f _) (finiteApproxPred_congr (A := A) f _),
    memB_check_ofNat_omega, top_inf_eq, finiteApproxPred_check_ofNat]

theorem canonical_val_eq_memB
  (p : CanonicalPowerIdx (check (A := A) PSet.omega)) (n : Nat) :
  p.1.1 <n> =
  memB (check (PSet.ofNat n))
    ((powerB (check (A := A) PSet.omega)).child p.1) := by
  have hrestr :
    (restrictPowerIdx ((powerB (check (A := A) PSet.omega)).child p.1)
      (check (A := A) PSet.omega)).1 <n> = p.1.1 <n> :=
    congrArg (fun v : (powerB (check (A := A) PSet.omega)).idx => v.1 <n>) p.2
  change (top : A) sqcap
  memB (check (PSet.ofNat n))
    ((powerB (check (A := A) PSet.omega)).child p.1) = p.1.1 <n> at hrestr
  rw [top_inf_eq] at hrestr
  exact hrestr.symm

/-- On the canonical carrier, numeral membership determines Boolean equality. -/
theorem eqB_canonical_of_memB_ofNat
  {p q : CanonicalPowerIdx (check (A := A) PSet.omega)}
  (h : forall n : Nat,
    memB (check (PSet.ofNat n))
      ((powerB (check (A := A) PSet.omega)).child p.1) =
      memB (check (PSet.ofNat n))
        ((powerB (check (A := A) PSet.omega)).child q.1)) :
  eqB ((powerB (check (A := A) PSet.omega)).child p.1)
    ((powerB (check (A := A) PSet.omega)).child q.1) = top := by
  have hpq : p = q := by
  refine Subtype.ext ?_
  refine Subtype.ext (funext fun i => ?_)
  cases i

```

```

    rename_i n
    rw [canonical_val_eq_memB (A := A) p n, canonical_val_eq_memB (A := A) q n, h n]
  rw [hpq]
  exact eqB_self _

theorem engelerAppPred_eqB {F F' X : AName.{u} A} (h : eqB F F' = top) :
  (q : AName.{u} A) :
    engelerAppPred F X q = engelerAppPred F' X q := by
  unfold engelerAppPred
  refine iSup_congr fun K => iSup_congr fun n => ?_
  rw [eqB_top_memB_right h]

theorem engelerAppName_eqB {F F' X : AName.{u} A} (h : eqB F F' = top) :
  eqB (engelerAppName F X) (engelerAppName F' X) = top := by
  have : engelerAppPred F X = engelerAppPred F' X :=
    funext (engelerAppPred_eqB h)
  unfold engelerAppName
  rw [this]
  exact eqB_self _

/-- Theorem 30, retract at Boolean value `top` :
`?lam(f) * X = f(X)? = 1` for determined-by-finite `f`. -/
theorem engelerVA_retract
  (f : CanonicalPowerIdx (check (A := A) PSet.omega) ->
    CanonicalPowerIdx (check (A := A) PSet.omega))
  (hf : DeterminedByFiniteVA (A := A) f)
  (X : CanonicalPowerIdx (check (A := A) PSet.omega)) :
  eqB ((powerB (check (A := A) PSet.omega)).child
    (engelerAppVA (A := A) (engelerLamVA (A := A) f) X).1)
    ((powerB (check (A := A) PSet.omega)).child (f X).1) = top := by
  refine eqB_canonical_of_memB_ofNat (A := A) fun n => ?_
  have happ : memB (check (PSet.ofNat n))
    ((powerB (check (A := A) PSet.omega)).child
      (engelerAppVA (A := A) (engelerLamVA (A := A) f) X).1) =
    memB (check (PSet.ofNat n))
      (engelerAppName
        ((powerB (check (A := A) PSet.omega)).child (engelerLamVA (A := A) f).1)
        ((powerB (check (A := A) PSet.omega)).child X.1)) :=
    eqB_top_memB_right (engelerAppVA_eqB (A := A) (engelerLamVA (A := A) f) X)
  have hlam : eqB
    ((powerB (check (A := A) PSet.omega)).child (engelerLamVA (A := A) f).1)
    (engelerLamName (A := A) f) = top :=
    engelerLamVA_eqB (A := A) f
  have happ' : memB (check (PSet.ofNat n))
    (engelerAppName
      ((powerB (check (A := A) PSet.omega)).child (engelerLamVA (A := A) f).1)
      ((powerB (check (A := A) PSet.omega)).child X.1)) =
    memB (check (PSet.ofNat n))
      (engelerAppName (engelerLamName (A := A) f)
        ((powerB (check (A := A) PSet.omega)).child X.1)) :=
    eqB_top_memB_right (engelerAppName_eqB hlam)
  have hfX : memB (check (PSet.ofNat n))
    ((powerB (check (A := A) PSet.omega)).child (f X).1) =
    memB (check (PSet.ofNat n))
      (sepB (check PSet.omega) (finiteApproxPred (A := A) f
        ((powerB (check (A := A) PSet.omega)).child X.1))) :=
    eqB_top_memB_right (hf X)
  rw [happ, happ', hfX, memB_check_ofNat_app_lam, memB_sepB_finiteApprox]

theorem engelerVA_retract_oid
  (f : CanonicalPowerIdx (check (A := A) PSet.omega) ->
    CanonicalPowerIdx (check (A := A) PSet.omega))
  (hf : DeterminedByFiniteVA (A := A) f)

```

```

(X : CanonicalPowerIdx (check (A := A) PSet.omega)) :
  (canonicalPowerSetoid (check (A := A) PSet.omega)).eq
    (engelerAppVA (A := A) (engelerLamVA (A := A) f) X) (f X) = top := by
  rw [canonicalPowerSetoid_eq, oid_eq_powerB]
  exact engelerVA_retract (A := A) f hf X

/-!
## Ground pairing retract (Proposition 29 on the constructed `E`)
-/

theorem engelerPair_prop29_retract {f : Set Nat -> Set Nat}
  (hf : DeterminedByFinite f) (X : Set Nat) :
  engelerApp engelerPair (engelerLam engelerPair f) X = f X :=
  prop29_retract engelerPair engelerPair_injective hf X

/-!
## Theorem 30 package
-/

/-- Theorem 30 data: an `A`-valued reflexive dcpo recorded as the poset
`? subseq ?`, application, abstraction, and the retract at Boolean value `top` for
maps determined by finite sets. This is not Definition 19 inside `V^A`. -/
structure AValuedReflexiveDcpo (A : Type u) [CompleteBooleanAlgebra A]
  (X : Type u) where
  poset : APoset (A := A) X
  app : X -> X -> X
  lam : (X -> X) -> X
  determined : (X -> X) -> Prop
  retract : forall f x, determined f -> poset.eq (app (lam f) x) (f x) = top

/-- Theorem 30: `(P^A(check E), ? subseq ?, *, lam)` is an `A`-valued reflexive dcpo
on the canonical carrier (operations and retract at `top`). Strictness is the
canonical-carrier fact `canonicalPowerSetoid_isStrict`; the raw index carrier
is not claimed strict. -/
noncomputable def engelerVA_model :
  AValuedReflexiveDcpo A
  (CanonicalPowerIdx (check (A := A) PSet.omega)) where
  poset := canonicalPowerPoset (check (A := A) PSet.omega)
  app := engelerAppVA (A := A)
  lam := engelerLamVA (A := A)
  determined := DeterminedByFiniteVA (A := A)
  retract f X hf := by
  rw [canonicalPowerPoset_eq]
  exact engelerVA_retract_oid (A := A) f hf X

theorem engelerVA_complete :
  (canonicalPowerSetoid (check (A := A) PSet.omega)).IsComplete :=
  canonicalPowerSetoid_isComplete _

theorem engelerVA_total :
  (canonicalPowerSetoid (check (A := A) PSet.omega)).IsTotal :=
  canonicalPowerSetoid_isTotal _

theorem engelerVA_strict :
  (canonicalPowerSetoid (check (A := A) PSet.omega)).IsStrict :=
  canonicalPowerSetoid_isStrict _

/-- Theorem 30: the packaged `A`-valued reflexive dcpo
`(P^A(check E), ? subseq ?, *, lam)` on the canonical carrier. -/
theorem engelerVA :
  (engelerVA_model (A := A)).poset =
    canonicalPowerPoset (check (A := A) PSet.omega) /\
  (forall F X, (engelerVA_model (A := A)).app F X =

```

```

    engelerAppVA (A := A) F X) /\
  (forall f, (engelerVA_model (A := A)).lam f = engelerLamVA (A := A) f) /\
  (forall f X, DeterminedByFiniteVA (A := A) f ->
    (canonicalPowerSetoid (check (A := A) PSet.omega)).eq
      (engelerAppVA (A := A) (engelerLamVA (A := A) f) X) (f X) = top ) /\
  (canonicalPowerSetoid (check (A := A) PSet.omega)).IsComplete /\
  (canonicalPowerSetoid (check (A := A) PSet.omega)).IsTotal /\
  (canonicalPowerSetoid (check (A := A) PSet.omega)).IsStrict :=
<rfl, fun _ _ => rfl, fun _ => rfl,
  fun f X hf => engelerVA_retract_oid (A := A) f hf X,
  engelerVA_complete (A := A), engelerVA_total (A := A),

```

Lean 4 source (lines 801–803)

```

    engelerVA_strict (A := A)>

end Scott2026

```

A.20 Scott2026/ReflexiveVA.lean

142 lines.

Lean 4 source

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/

import Scott2026.InternalDomain

/-!
# Definition 19 inside `V^A`

These are the Boolean values of the order-theoretic clauses in Definition 19.
Functions are represented by their internal graphs. The function-space name
`C` is required extensionally to contain exactly the Scott-continuous
self-maps of `D`, and its order is required to be the pointwise order.
-/

universe u

namespace Scott2026

open AName

variable {A : Type u} [CompleteBooleanAlgebra A]

/-- Evaluation of an internal binary relation. -/
noncomputable def relB (R x y : AName.{u} A) : A :=
  memB (opairB x y) R

/-- `x` is an upper bound of `S` for the relation `R`. -/
noncomputable def isUpperBoundRelB
  (x S R : AName.{u} A) : A :=
  ? y : AName.{u} A, memB y S ? relB R y x

/-- `x` is the least upper bound of `S` for `R`. -/
noncomputable def isSupRelB
  (x S R : AName.{u} A) : A :=
  isUpperBoundRelB x S R sqcap
  ? y : AName.{u} A,

```

```

isUpperBoundRelB y S R ? relB R x y

/-- `S` is a nonempty directed subset of `D` for `R`. -/
noncomputable def isDirectedRelB
  (S D R : AName.{u} A) : A :=
  subsetB S D sqcap
  ( bigcup x : AName.{u} A, memB x S) sqcap
  ? x : AName.{u} A, ? y : AName.{u} A,
  memB x S sqcap memB y S ?
  bigcup z : AName.{u} A,
  memB z S sqcap relB R x z sqcap relB R y z

/-- `R` is a partial order on the internal set `D`. -/
noncomputable def isPartialOrderB
  (D R : AName.{u} A) : A :=
  subsetB R (prodB D D) sqcap
  (? x : AName.{u} A, memB x D ? relB R x x) sqcap
  (? x : AName.{u} A, ? y : AName.{u} A,
  memB x D sqcap memB y D sqcap relB R x y sqcap relB R y x ? eqB x y) sqcap
  ? x : AName.{u} A, ? y : AName.{u} A, ? z : AName.{u} A,
  relB R x y sqcap relB R y z ? relB R x z

/-- `D` is a dcpo with bottom under `R`. -/
noncomputable def isDcpoWithBottomB
  (D R : AName.{u} A) : A :=
  isPartialOrderB D R sqcap
  ( bigcup b : AName.{u} A,
  memB b D sqcap
  ? x : AName.{u} A, memB x D ? relB R b x) sqcap
  ? S : AName.{u} A,
  isDirectedRelB S D R ?
  bigcup d : AName.{u} A, memB d D sqcap isSupRelB d S R

/-- The output values of `F` on `S` have least upper bound `y`. -/
noncomputable def mapsToSupB
  (F S y R : AName.{u} A) : A :=
  (? x : AName.{u} A, ? z : AName.{u} A,
  memB x S sqcap memB (opairB x z) F ? relB R z y) sqcap
  ? u : AName.{u} A,
  (? x : AName.{u} A, ? z : AName.{u} A,
  memB x S sqcap memB (opairB x z) F ? relB R z u) ?
  relB R y u

/-- `F : D -> E` is Scott-continuous for the internal orders `R` and `Q`. -/
noncomputable def isScottContinuousB
  (F D E R Q : AName.{u} A) : A :=
  isFunctionB F D E sqcap
  (? x : AName.{u} A, ? x' : AName.{u} A,
  ? y : AName.{u} A, ? y' : AName.{u} A,
  memB (opairB x y) F sqcap memB (opairB x' y') F sqcap relB R x x' ?
  relB Q y y') sqcap
  ? S : AName.{u} A, ? x : AName.{u} A, ? y : AName.{u} A,
  isDirectedRelB S D R sqcap isSupRelB x S R sqcap
  memB (opairB x y) F ?
  mapsToSupB F S y Q

/-- Boolean value saying that `C` contains exactly the Scott-continuous
internal self-maps of `D`. -/
noncomputable def isContinuousMapSpaceB
  (C D R : AName.{u} A) : A :=
  subsetB C (funB D D) sqcap
  ? F : AName.{u} A,
  (memB F C ? isScottContinuousB F D D R R) sqcap

```



```

      (isScottContinuousB F D D R R ? memB F C)

/-- Pointwise order of internal functions. -/
noncomputable def pointwiseLeB
  (F G D R : AName.{u} A) : A :=
  ? x : AName.{u} A, ? y : AName.{u} A, ? z : AName.{u} A,
  memB x D sqcap memB (opairB x y) F sqcap memB (opairB x z) G ? relB R y z

/-- `Q` is the pointwise order on the continuous-map space `C`. -/
noncomputable def isPointwiseOrderB
  (Q C D R : AName.{u} A) : A :=
  subsetB Q (prodB C C) sqcap
  ? F : AName.{u} A, ? G : AName.{u} A,
  memB F C sqcap memB G C ?
  (relB Q F G ? pointwiseLeB F G D R) sqcap
  (pointwiseLeB F G D R ? relB Q F G)

/-- Definition 19 interpreted in `V^A`.

`Fun : D -> C` and `Lam : C -> D` are graph names. The last conjunct is the
retraction equation `Fun comp Lam = id_C`. -/
noncomputable def isReflexiveDcpoB
  (D R C Q Fun Lam : AName.{u} A) : A :=
  isDcpoWithBottomB D R sqcap
  isContinuousMapSpaceB C D R sqcap
  isPointwiseOrderB Q C D R sqcap
  isScottContinuousB Fun D C R Q sqcap
  isScottContinuousB Lam C D Q R sqcap
  eqB (compB Fun Lam C C) (idB C)

/-- Definition 19's extensionality clause inside `V^A`. -/
noncomputable def isExtensionalReflexiveDcpoB
  (D R C Q Fun Lam : AName.{u} A) : A :=
  isReflexiveDcpoB D R C Q Fun Lam sqcap
  eqB (compB Lam Fun D D) (idB D)

/-- Paper-facing name for internal Definition 19. -/
noncomputable abbrev definition_19_va := @isReflexiveDcpoB

end Scott2026

```

A.21 Scott2026/LambdaVA.lean

717 lines.

Lean 4 source (lines 1–400)

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/

import Scott2026.Lambda
import Scott2026.VA

/-!
# Pure fun -syntax in `V^A` (Example 21 at `V^A`, Proposition 22, Example 24)

Furber-Mardare-Panangaden-Scott, CSL 2026, Example 21, Proposition 22, and
Example 24. Pure terms are encoded as pre-sets by the paper's tags: `(0,x)` a
variable, `(1,(x,M))` an abstraction, `(2,(M,N))` an application. There is no
constant tag `3` in this module, and no claim of `?(D, check Var, ?)^A` or an

```

interpretation.

$\lambda^{?(\text{check Var})}A$ is the name $\lambda^B(\text{check Var})$ whose children are the internally paired encodings. Proposition 22's check-equality identifies this name with $\text{check } (?(\text{Var}))$.

Example 24 treats $\text{fun } _$ as a subset of $?(Var) \times ?(Var)$. Equations are encoded as $\text{encodeEq } M \ N = (\text{encodeLam } M, \text{encodeLam } N)$ (Kuratowski pairing). $\text{fun } ^A$ is the name $\lambda^B(\text{check Var})$ whose children are the internally paired encodings of ground LamEq derivations. The paper's claim is $?(\text{lamEqInductiveB } (\text{lamEqB } (\text{check Var}))?) = 1$ and $?(\text{check}(\text{fun } _) \text{ subseteq } \text{lamEqB } (\text{check Var})) = 1$, by induction on LamEq .

universe u

namespace Scott2026

open AName

/-!

Ground tagged encoding (Example 21)

-/

/-- Paper tag `0`: a variable appears as $(0, x)$. -/

```
def pLamVar (x : PSet.{u}) : PSet.{u} :=
  pOpair (PSet.ofNat 0) x
```

/-- Paper tag `1`: an abstraction appears as $(1, (x, M))$. -/

```
def pLamAbs (x M : PSet.{u}) : PSet.{u} :=
  pOpair (PSet.ofNat 1) (pOpair x M)
```

/-- Paper tag `2`: an application appears as $(2, (M, N))$. -/

```
def pLamApp (M N : PSet.{u}) : PSet.{u} :=
  pOpair (PSet.ofNat 2) (pOpair M N)
```

/-- Encode a ground pure fun -term by the paper's tags. -/

```
def encodeLam {a : Type u} (f : a -> PSet.{u}) : Lam a -> PSet.{u}
| .var x => pLamVar (f x)
| .abs x M => pLamAbs (f x) (encodeLam f M)
| .app M N => pLamApp (encodeLam f M) (encodeLam f N)
```

/-- Ground set $?(Var)$ of encoded pure fun -terms. -/

```
def pLamSet (Var : PSet.{u}) : PSet.{u} :=
  PSet.mk (Lam Var.Type) (encodeLam Var.Func)
```

/-- Paper pairing of tagged terms: $(\text{encodeLam } M, \text{encodeLam } N)$. -/

```
def encodeEq {a : Type u} (f : a -> PSet.{u}) (M N : Lam a) : PSet.{u} :=
  pOpair (encodeLam f M) (encodeLam f N)
```

/-- Ground set $\text{fun } \text{subseteq } ?(Var) \times ?(Var)$ of encoded Definition 23 equations. -/

```
def pLamEqSet (Var : PSet.{u}) [DecidableEq Var.Type] : PSet.{u} :=
  PSet.mk {p : Lam Var.Type x Lam Var.Type // LamEq p.1 p.2}
  (fun p => encodeEq Var.Func p.1.1 p.1.2)
```

/-!

Internal pairing of tags

-/

variable {A : Type u} [CompleteBooleanAlgebra A]

/-- Internal variable encoding $(0, x)^A$. -/

```
noncomputable def lamVarB (x : AName.{u} A) : AName.{u} A :=
```

```

opairB (check (PSet.ofNat 0)) x

/-- Internal abstraction encoding `(1, (x, M))^A`. -/
noncomputable def lamAbsB (x M : AName.{u} A) : AName.{u} A :=
  opairB (check (PSet.ofNat 1)) (opairB x M)

/-- Internal application encoding `(2, (M, N))^A`. -/
noncomputable def lamAppB (M N : AName.{u} A) : AName.{u} A :=
  opairB (check (PSet.ofNat 2)) (opairB M N)

/-- Encode a term using the children of a variable name `V`. -/
noncomputable def encodeLamB (V : AName.{u} A) : Lam V.idx -> AName.{u} A
| .var x => lamVarB (V.child x)
| .abs x M => lamAbsB (V.child x) (encodeLamB V M)
| .app M N => lamAppB (encodeLamB V M) (encodeLamB V N)

/-- `?(V)^A`: the name whose children are the tagged encodings over `dom(V)`. -/
noncomputable def lamB (V : AName.{u} A) : AName.{u} A :=
  mk (Lam V.idx) (encodeLamB V) (fun _ => top)

/-- Boolean value of the paper's `?(V)`-inductive clause (Example 21 at `V^A`).
Pairing atoms are `eqB` of `opairB` encodings, as permitted by `eqB_opairB`. -/
noncomputable def lamInductiveB (V X : AName.{u} A) : A :=
  (? x : AName.{u} A, memB x V ?
    bigcup p : AName.{u} A, memB p X sqcap eqB p (lamVarB x)) sqcap
  (? x : AName.{u} A, memB x V ?
    ? M : AName.{u} A, memB M X ?
    bigcup p : AName.{u} A, memB p X sqcap eqB p (lamAbsB x M)) sqcap
  (? M : AName.{u} A, memB M X ?
    ? N : AName.{u} A, memB N X ?
    bigcup p : AName.{u} A, memB p X sqcap eqB p (lamAppB M N))

/-!
## Name calculations
-/

theorem eqB_top_trans {x y z : AName.{u} A}
  (hxy : eqB x y = top) (hyz : eqB y z = top) : eqB x z = top :=
  top_unique ((le_inf hxy.ge hyz.ge).trans (eqB_trans x y z))

theorem eqB_opairB_top {x y u v : AName.{u} A}
  (hx : eqB x u = top) (hy : eqB y v = top) :
  eqB (opairB x y) (opairB u v) = top := by
  rw [eqB_opairB, hx, hy, top_inf_eq]

theorem eqB_lamVarB (x y : AName.{u} A) :
  eqB (lamVarB x) (lamVarB y) = eqB x y := by
  rw [lamVarB, lamVarB, eqB_opairB, eqB_self, top_inf_eq]

theorem eqB_lamAbsB (x M y N : AName.{u} A) :
  eqB (lamAbsB x M) (lamAbsB y N) = eqB x y sqcap eqB M N := by
  rw [lamAbsB, lamAbsB, eqB_opairB, eqB_self, top_inf_eq, eqB_opairB]

theorem eqB_lamAppB (M N M' N' : AName.{u} A) :
  eqB (lamAppB M N) (lamAppB M' N') = eqB M M' sqcap eqB N N' := by
  rw [lamAppB, lamAppB, eqB_opairB, eqB_self, top_inf_eq, eqB_opairB]

theorem memB_lamB (z V : AName.{u} A) :
  memB z (lamB V) = bigcup M : Lam V.idx, eqB z (encodeLamB V M) := by
  rw [lamB, memB_mk]
  exact iSup_congr fun _ => inf_top_eq _

theorem memB_encodeLamB (V : AName.{u} A) (M : Lam V.idx) :

```

```

    memB (encodeLamB V M) (lamB V) = top := by
  rw [memB_lamB]
  exact top_unique ((eqB_self (encodeLamB V M)).ge.trans
    (le_iSup (fun N : Lam V.idx => eqB (encodeLamB V M) (encodeLamB V N)) M))

theorem check_eq_mk (x : PSet.{u}) :
  check (A := A) x = mk x.Type (fun i => check (x.Func i)) (fun _ => top) := by
  cases x
  rfl

theorem memB_check_child (Var : PSet.{u}) (i : (check (A := A) Var).idx) :
  memB ((check Var).child i) (check Var) = top := by
  rw [memB_eq]
  refine top_unique (le_iSup_of_le i ?_)
  rw [check_val (A := A) Var i, eqB_self]
  exact le_inf le_top le_top

theorem eqB_mk_top {a : Type u} (f g : a -> AName.{u} A)
  (h : forall i, eqB (f i) (g i) = top) :
  eqB (mk a f (fun _ => top)) (mk a g (fun _ => top)) = top := by
  rw [eqB_mk]
  refine inf_eq_top_iff.mpr <?fwd, ?bwd>
  * refine iInf_eq_top.mpr fun i => himp_eq_top_iff.mpr ?_
    rw [memB_mk]
    refine le_iSup_of_le i ?_
    rw [h i, top_inf_eq]
  * refine iInf_eq_top.mpr fun j => himp_eq_top_iff.mpr ?_
    rw [memB_mk]
    refine le_iSup_of_le j ?_
    rw [eqB_comm (x := g j) (y := f j), h j, top_inf_eq]

/-- If `?exists p in X. p = t? = 1`, then `?t in X? = 1`. Congruence uses
substitution of equality; the witness is Theorem 1(iii). -/
theorem memB_of_exists_eqB (X t : AName.{u} A)
  (htop : (bigcup p : AName.{u} A, memB p X sqcap eqB p t) = top) :
  memB t X = top := by
  let phi : AName.{u} A -> A := fun p => memB p X sqcap eqB p t
  have hcongr : forall p q, eqB p q sqcap phi p <= phi q := by
    intro p q
    refine le_inf ?mem ?eq
    * have hmem : memB p X sqcap eqB p q <= memB q X := memB_eqB_left p X q
      refine hmem.trans' ?_
      exact le_inf (inf_le_of_right_le inf_le_left) inf_le_left
    * have htrans : eqB q p sqcap eqB p t <= eqB q t := eqB_trans q p t
      refine htrans.trans' ?_
      rw [eqB_comm (x := q) (y := p)]
      exact le_inf inf_le_left (inf_le_of_right_le inf_le_right)
  obtain <p, hp> := theorem_1_iii phi hcongr top htop.symm
  have hmem : memB p X = top := top_unique (hp.ge.trans inf_le_left)
  have heq : eqB p t = top := top_unique (hp.ge.trans inf_le_right)
  rwa [eqB_top_memB_left (x := p) (y := t) (z := X) heq] at hmem

/-!
## Example 21 at `V^A`: `lamB V` is inductive
-/

theorem lamInductiveB_var (V : AName.{u} A) :
  (? x : AName.{u} A, memB x V ?
    bigcup p : AName.{u} A, memB p (lamB V) sqcap eqB p (lamVarB x)) = top := by
  refine iInf_eq_top.mpr fun x => himp_eq_top_iff.mpr ?_
  rw [memB_eq]
  refine iSup_le fun i => ?_
  refine le_trans (inf_le_left (b := V.val i)) ?_

```

```

refine le_iSup_of_le (lamVarB (V.child i)) ?_
have hmem : memB (lamVarB (V.child i)) (lamB V) = top :=
  memB_encodeLamB V (Lam.var i)
rw [hmem, eqB_lamVarB, eqB_comm (x := V.child i) (y := x), top_inf_eq]

theorem lamInductiveB_abs (V : AName.{u} A) :
  (? x : AName.{u} A, memB x V ?
    ? M : AName.{u} A, memB M (lamB V) ?
      bigcup p : AName.{u} A, memB p (lamB V) sqcap eqB p (lamAbsB x M)) = top := by
  refine iInf_eq_top.mpr fun x => himp_eq_top_iff.mpr ?_
  refine le_iInf fun M => ?_
  rw [le_himp_iff]
  rw [memB_eq (x := x) (y := V), memB_lamB, iSup_inf_eq]
  refine iSup_le fun i => ?_
  rw [inf_iSup_eq]
  refine iSup_le fun N => ?_
  refine le_iSup_of_le (encodeLamB V (Lam.abs i N)) ?_
  have hmem : memB (encodeLamB V (Lam.abs i N)) (lamB V) = top :=
    memB_encodeLamB V (Lam.abs i N)
  change _ <= memB (encodeLamB V (Lam.abs i N)) (lamB V) sqcap
    eqB (lamAbsB (V.child i) (encodeLamB V N)) (lamAbsB x M)
  rw [hmem, eqB_lamAbsB, top_inf_eq]
  refine le_inf ?_ ?_
  * rw [eqB_comm (x := V.child i) (y := x)]
    exact inf_le_of_left_le inf_le_left
  * rw [eqB_comm (x := encodeLamB V N) (y := M)]
    exact inf_le_right

theorem lamInductiveB_app (V : AName.{u} A) :
  (? M : AName.{u} A, memB M (lamB V) ?
    ? N : AName.{u} A, memB N (lamB V) ?
      bigcup p : AName.{u} A, memB p (lamB V) sqcap eqB p (lamAppB M N)) = top := by
  refine iInf_eq_top.mpr fun M => himp_eq_top_iff.mpr ?_
  refine le_iInf fun N => ?_
  rw [le_himp_iff]
  rw [memB_lamB (z := M), memB_lamB (z := N), iSup_inf_eq]
  refine iSup_le fun M' => ?_
  rw [inf_iSup_eq]
  refine iSup_le fun N' => ?_
  refine le_iSup_of_le (encodeLamB V (Lam.app M' N')) ?_
  have hmem : memB (encodeLamB V (Lam.app M' N')) (lamB V) = top :=
    memB_encodeLamB V (Lam.app M' N')
  change _ <= memB (encodeLamB V (Lam.app M' N')) (lamB V) sqcap
    eqB (lamAppB (encodeLamB V M') (encodeLamB V N')) (lamAppB M N)
  rw [hmem, eqB_lamAppB, top_inf_eq]
  refine le_inf ?_ ?_
  * rw [eqB_comm (x := encodeLamB V M') (y := M)]
    exact inf_le_left
  * rw [eqB_comm (x := encodeLamB V N') (y := N)]
    exact inf_le_right

/-- `lamB V` satisfies the Example 21 clauses at Boolean value `1`. -/
theorem lamInductiveB_lamB (V : AName.{u} A) :
  lamInductiveB V (lamB V) = top := by
  rw [lamInductiveB]
  refine inf_eq_top_iff.mpr <?varAbs, lamInductiveB_app V>
  exact inf_eq_top_iff.mpr <lamInductiveB_var V, lamInductiveB_abs V>

/-!
## Leastness, following `check_omega_least`
-/

theorem lamInductiveB_parts {V X : AName.{u} A} (h : lamInductiveB V X = top) :

```

```

(? x : AName.{u} A, memB x V ?
  bigcup p : AName.{u} A, memB p X sqcap eqB p (lamVarB x)) = top /\
(? x : AName.{u} A, memB x V ?
  ? M : AName.{u} A, memB M X ?
    bigcup p : AName.{u} A, memB p X sqcap eqB p (lamAbsB x M)) = top /\
(? M : AName.{u} A, memB M X ?
  ? N : AName.{u} A, memB N X ?
    bigcup p : AName.{u} A, memB p X sqcap eqB p (lamAppB M N)) = top := by
have hsplit := inf_eq_top_iff.mp h
exact <(inf_eq_top_iff.mp hsplit.1).1, (inf_eq_top_iff.mp hsplit.1).2, hsplit.2>

theorem lamInductiveB_var_le {V X : AName.{u} A} (h : lamInductiveB V X = top )
  (x : AName.{u} A) :
  memB x V <= bigcup p : AName.{u} A, memB p X sqcap eqB p (lamVarB x) :=
himp_eq_top_iff.mp (iInf_eq_top.mp (lamInductiveB_parts h).1 x)

theorem lamInductiveB_abs_le {V X : AName.{u} A} (h : lamInductiveB V X = top )
  (x M : AName.{u} A) :
  memB x V sqcap memB M X <=
  bigcup p : AName.{u} A, memB p X sqcap eqB p (lamAbsB x M) := by
have hx : memB x V <=
  ? M' : AName.{u} A, memB M' X ?
    bigcup p : AName.{u} A, memB p X sqcap eqB p (lamAbsB x M') :=
himp_eq_top_iff.mp (iInf_eq_top.mp (lamInductiveB_parts h).2.1 x)
exact le_himp_iff.mp (hx.trans (iInf_le _ M))

theorem lamInductiveB_app_le {V X : AName.{u} A} (h : lamInductiveB V X = top )
  (M N : AName.{u} A) :
  memB M X sqcap memB N X <=
  bigcup p : AName.{u} A, memB p X sqcap eqB p (lamAppB M N) := by
have hM : memB M X <=
  ? N' : AName.{u} A, memB N' X ?
    bigcup p : AName.{u} A, memB p X sqcap eqB p (lamAppB M N') :=
himp_eq_top_iff.mp (iInf_eq_top.mp (lamInductiveB_parts h).2.2 M)
exact le_himp_iff.mp (hM.trans (iInf_le _ N))

/-- Every encoded term over `check Var` belongs to an inductive name, by
induction on `Lam` (the `check_omega_least` pattern). -/
theorem memB_encodeLamB_of_inductive (Var : PSet.{u}) {X : AName.{u} A}
  (h : lamInductiveB (check Var) X = top )
  (M : Lam (check (A := A) Var).idx) :
  memB (encodeLamB (check Var) M) X = top := by
induction M with
| var x =>
  have hx : memB ((check (A := A) Var).child x) (check Var) = top :=
  memB_check_child (A := A) Var x
  have hex : ( bigcup p : AName.{u} A,
    memB p X sqcap eqB p (lamVarB ((check (A := A) Var).child x))) = top :=
  top_unique (hx.ge.trans (lamInductiveB_var_le h ((check Var).child x)))
  exact memB_of_exists_eqB X (lamVarB ((check (A := A) Var).child x)) hex
| abs x M ih =>
  have hx : memB ((check (A := A) Var).child x) (check Var) = top :=
  memB_check_child (A := A) Var x
  have hex : ( bigcup p : AName.{u} A,
    memB p X sqcap eqB p (lamAbsB ((check (A := A) Var).child x)
      (encodeLamB (check Var) M))) = top :=
  top_unique ((le_inf hx.ge ih.ge).trans
    (lamInductiveB_abs_le h ((check Var).child x) (encodeLamB (check Var) M)))
  exact memB_of_exists_eqB X
    (lamAbsB ((check (A := A) Var).child x) (encodeLamB (check Var) M)) hex
| app M N ihM ihN =>
  have hex : ( bigcup p : AName.{u} A,
    memB p X sqcap eqB p (lamAppB (encodeLamB (check Var) M)

```

```

      (encodeLamB (check Var) N))) = top :=
top_unique ((le_inf ihM.ge ihN.ge).trans
  (lamInductiveB_app_le h (encodeLamB (check Var) M)
    (encodeLamB (check Var) N)))
exact memB_of_exists_eqB X
  (lamAppB (encodeLamB (check Var) M) (encodeLamB (check Var) N)) hex

/-- Leastness of `?(check Var)^A`: if `X` is `?(check Var)`-inductive at
Boolean value 1, then `lamB (check Var) subseq X` at Boolean value 1. -/
theorem lamB_least {Var : PSet.{u}} {X : AName.{u} A}
  (h : lamInductiveB (check (A := A) Var) X = top) :
  subsetB (lamB (check Var)) X = top := by
  rw [lamB, subsetB_mk]
  refine iInf_eq_top.mpr fun M => himp_eq_top_iff.mpr ?_
  exact (memB_encodeLamB_of_inductive (A := A) Var h M).ge

/-!
## Check commutation: `?check (?(Var)) = lamB (check Var)? = 1`
-/

theorem check_encodeLam (Var : PSet.{u}) (M : Lam Var.Type) :
  eqB (check (A := A) (encodeLam Var.Func M))
    (encodeLamB
      (mk Var.Type (fun i => check (A := A) (Var.Func i)) (fun _ => top)) M) =
    top := by
  induction M with
  | var x =>
    exact check_opair (A := A) (PSet.ofNat 0) (Var.Func x)
  | abs x M ih =>
    have hAB :=
      check_opair (A := A) (PSet.ofNat 1)
        (pOpair (Var.Func x) (encodeLam Var.Func M))
    have hinner := check_opair (A := A) (Var.Func x) (encodeLam Var.Func M)
    have hBC :=
      eqB_opairB_top (A := A) (eqB_self (check (PSet.ofNat 1))) hinner
    have hCD :=
      eqB_opairB_top (A := A) (eqB_self (check (PSet.ofNat 1)))
        (eqB_opairB_top (eqB_self (check (Var.Func x))) ih)
    exact eqB_top_trans (eqB_top_trans hAB hBC) hCD
  | app M N ihM ihN =>
    have hAB :=
      check_opair (A := A) (PSet.ofNat 2)
        (pOpair (encodeLam Var.Func M) (encodeLam Var.Func N))
    have hinner :=
      check_opair (A := A) (encodeLam Var.Func M) (encodeLam Var.Func N)
    have hBC :=
      eqB_opairB_top (A := A) (eqB_self (check (PSet.ofNat 2))) hinner
    have hCD :=
      eqB_opairB_top (A := A) (eqB_self (check (PSet.ofNat 2)))
        (eqB_opairB_top ihM ihN)
    exact eqB_top_trans (eqB_top_trans hAB hBC) hCD

/-- Proposition 22, check-equality: `?check (?(Var)) = lamB (check Var)? = 1`. -/
theorem lamB_check_eq (Var : PSet.{u}) :
  eqB (check (A := A) (pLamSet Var)) (lamB (check Var)) = top := by
  rw [check_eq_mk (A := A) Var]
  change eqB
    (check (A := A) (PSet.mk (Lam Var.Type) (encodeLam Var.Func)))
    (lamB (mk Var.Type (fun i => check (A := A) (Var.Func i)) (fun _ => top))) =
    top
  rw [check_mk]
  exact eqB_mk_top _ _ fun M => check_encodeLam (A := A) Var M

```

```

/-!
## Example 24: `fun ^A` and `?check fun subseteq fun ^A? = 1`
-/

/-- Internal encoding of an equation as `(encodeLamB M, encodeLamB N)^A`. -/
noncomputable def encodeEqB (V : AName.{u} A) (M N : Lam V.idx) : AName.{u} A :=

Lean 4 source (lines 401–717)

    opairB (encodeLamB V M) (encodeLamB V N)

/-- Index type of ground `LamEq` pairs over `dom(V)`. -/
def LamEqIdx (V : AName.{u} A) [DecidableEq V.idx] : Type u :=
  {p : Lam V.idx x Lam V.idx // LamEq p.1 p.2}

/-- `fun ^A`: the name whose children are the paired encodings of ground `LamEq`
derivations over `dom(V)`. -/
noncomputable def lamEqB (V : AName.{u} A) [DecidableEq V.idx] : AName.{u} A :=
  mk (LamEqIdx V) (fun p => encodeEqB V p.1.1 p.1.2) (fun _ => top)

/-- Boolean value of the paper's `fun` -inductive clause (Example 24). Not
required to be `Delta_0`. Pairing atoms are `eqB` of `opairB` encodings; `b` uses
paper substitution `Lam.substCA`, and `a` is the remaining Definition 23
generator. -/
noncomputable def lamEqInductiveB (V S : AName.{u} A) [DecidableEq V.idx] : A :=
  (? M : Lam V.idx,
    bigcup p : AName.{u} A, memB p S sqcap eqB p (encodeEqB V M M)) sqcap
  (? e : LamEqIdx V,
    bigcup p : AName.{u} A, memB p S sqcap eqB p (encodeEqB V e.1.2 e.1.1)) sqcap
  (? M : Lam V.idx, ? N : Lam V.idx, ? L : Lam V.idx,
    ? _ : LamEq M N, ? _ : LamEq N L,
    bigcup p : AName.{u} A, memB p S sqcap eqB p (encodeEqB V M L)) sqcap
  (? e : LamEqIdx V, ? Z : Lam V.idx,
    bigcup p : AName.{u} A, memB p S sqcap eqB p
      (opairB (lamAppB (encodeLamB V e.1.1) (encodeLamB V Z))
        (lamAppB (encodeLamB V e.1.2) (encodeLamB V Z)))) sqcap
  (? e : LamEqIdx V, ? Z : Lam V.idx,
    bigcup p : AName.{u} A, memB p S sqcap eqB p
      (opairB (lamAppB (encodeLamB V Z) (encodeLamB V e.1.1))
        (lamAppB (encodeLamB V Z) (encodeLamB V e.1.2)))) sqcap
  (? x : V.idx, ? e : LamEqIdx V,
    bigcup p : AName.{u} A, memB p S sqcap eqB p
      (opairB (lamAbsB (V.child x) (encodeLamB V e.1.1))
        (lamAbsB (V.child x) (encodeLamB V e.1.2)))) sqcap
  (? x : V.idx, ? M : Lam V.idx, ? N : Lam V.idx,
    bigcup p : AName.{u} A, memB p S sqcap eqB p
      (opairB
        (lamAppB (lamAbsB (V.child x) (encodeLamB V M)) (encodeLamB V N))
        (encodeLamB V (Lam.substCA M x N)))) sqcap
  (? x : V.idx, ? y : V.idx, ? M : Lam V.idx,
    ? _ : y notin M.fv,
    bigcup p : AName.{u} A, memB p S sqcap eqB p
      (opairB (lamAbsB (V.child x) (encodeLamB V M))
        (lamAbsB (V.child y)
          (encodeLamB V (Lam.substCA M x (Lam.var y))))))

theorem eqB_encodeEqB (V : AName.{u} A) (M N M' N' : Lam V.idx) :
  eqB (encodeEqB V M N) (encodeEqB V M' N') =
    eqB (encodeLamB V M) (encodeLamB V M') sqcap
    eqB (encodeLamB V N) (encodeLamB V N') := by
  rw [encodeEqB, encodeEqB, eqB_opairB]

theorem memB_lamEqB (z V : AName.{u} A) [DecidableEq V.idx] :
  memB z (lamEqB V) =

```



```

    bigcup e : LamEqIdx V, eqB z (encodeEqB V e.1.1 e.1.2) := by
rw [lamEqB, memB_mk]
exact iSup_congr fun _ => inf_top_eq _

theorem memB_encodeEqB (V : AName.{u} A) [DecidableEq V.idx]
  (M N : Lam V.idx) (h : LamEq M N) :
  memB (encodeEqB V M N) (lamEqB V) = top := by
rw [memB_lamEqB]
exact top_unique ((eqB_self (encodeEqB V M N)).ge.trans
  (le_iSup (fun e : LamEqIdx V => eqB (encodeEqB V M N)
    (encodeEqB V e.1.1 e.1.2)) <(M, N), h>))

theorem lamEqInductiveB_refl (V : AName.{u} A) [DecidableEq V.idx] :
  (? M : Lam V.idx,
    bigcup p : AName.{u} A,
      memB p (lamEqB V) sqcap eqB p (encodeEqB V M M)) = top := by
refine iInf_eq_top.mpr fun M => ?_
refine top_unique (le_iSup_of_le (encodeEqB V M M) ?_)
rw [memB_encodeEqB V M M (LamEq.refl M), eqB_self, top_inf_eq]

theorem lamEqInductiveB_symm (V : AName.{u} A) [DecidableEq V.idx] :
  (? e : LamEqIdx V,
    bigcup p : AName.{u} A,
      memB p (lamEqB V) sqcap eqB p (encodeEqB V e.1.2 e.1.1)) = top := by
refine iInf_eq_top.mpr fun e => ?_
refine top_unique (le_iSup_of_le (encodeEqB V e.1.2 e.1.1) ?_)
rw [memB_encodeEqB V e.1.2 e.1.1 (LamEq.symm e.2), eqB_self, top_inf_eq]

theorem lamEqInductiveB_trans (V : AName.{u} A) [DecidableEq V.idx] :
  (? M : Lam V.idx, ? N : Lam V.idx, ? L : Lam V.idx,
    ? _ : LamEq M N, ? _ : LamEq N L,
      bigcup p : AName.{u} A, memB p (lamEqB V) sqcap eqB p (encodeEqB V M L)) = top :=
  by
refine iInf_eq_top.mpr fun M => iInf_eq_top.mpr fun N => iInf_eq_top.mpr fun L =>
  iInf_eq_top.mpr fun hMN => iInf_eq_top.mpr fun hNL => ?_
refine top_unique (le_iSup_of_le (encodeEqB V M L) ?_)
rw [memB_encodeEqB V M L (LamEq.trans hMN hNL), eqB_self, top_inf_eq]

theorem lamEqInductiveB_app_left (V : AName.{u} A) [DecidableEq V.idx] :
  (? e : LamEqIdx V, ? Z : Lam V.idx,
    bigcup p : AName.{u} A, memB p (lamEqB V) sqcap eqB p
      (opairB (lamAppB (encodeLamB V e.1.1) (encodeLamB V Z))
        (lamAppB (encodeLamB V e.1.2) (encodeLamB V Z)))) = top := by
refine iInf_eq_top.mpr fun e => iInf_eq_top.mpr fun Z => ?_
refine top_unique (le_iSup_of_le
  (encodeEqB V (e.1.1.app Z) (e.1.2.app Z)) ?_)
have hmem : memB (encodeEqB V (e.1.1.app Z) (e.1.2.app Z)) (lamEqB V) = top :=
  memB_encodeEqB V _ _ (LamEq.app_left e.2)
rw [hmem, encodeEqB, encodeLamB, encodeLamB, eqB_self, top_inf_eq]

theorem lamEqInductiveB_app_right (V : AName.{u} A) [DecidableEq V.idx] :
  (? e : LamEqIdx V, ? Z : Lam V.idx,
    bigcup p : AName.{u} A, memB p (lamEqB V) sqcap eqB p
      (opairB (lamAppB (encodeLamB V Z) (encodeLamB V e.1.1))
        (lamAppB (encodeLamB V Z) (encodeLamB V e.1.2)))) = top := by
refine iInf_eq_top.mpr fun e => iInf_eq_top.mpr fun Z => ?_
refine top_unique (le_iSup_of_le
  (encodeEqB V (Z.app e.1.1) (Z.app e.1.2)) ?_)
have hmem : memB (encodeEqB V (Z.app e.1.1) (Z.app e.1.2)) (lamEqB V) = top :=
  memB_encodeEqB V _ _ (LamEq.app_right e.2)
rw [hmem, encodeEqB, encodeLamB, encodeLamB, eqB_self, top_inf_eq]

theorem lamEqInductiveB_xi (V : AName.{u} A) [DecidableEq V.idx] :

```

```

    (? x : V.idx, ? e : LamEqIdx V,
      bigcup p : AName.{u} A, memB p (lamEqB V) sqcap eqB p
      (opairB (lamAbsB (V.child x) (encodeLamB V e.1.1))
        (lamAbsB (V.child x) (encodeLamB V e.1.2)))) = top := by
    refine iInf_eq_top.mpr fun x => iInf_eq_top.mpr fun e => ?_
    refine top_unique (le_iSup_of_le
      (encodeEqB V (Lam.abs x e.1.1) (Lam.abs x e.1.2)) ?_)
    have hmem : memB (encodeEqB V (Lam.abs x e.1.1) (Lam.abs x e.1.2)) (lamEqB V) = top :=
      memB_encodeEqB V _ _ (LamEq.xi x e.2)
    rw [hmem, encodeEqB, encodeLamB, encodeLamB, eqB_self, top_inf_eq]

theorem lamEqInductiveB_beta (V : AName.{u} A) [DecidableEq V.idx] :
  (? x : V.idx, ? M : Lam V.idx, ? N : Lam V.idx,
    bigcup p : AName.{u} A, memB p (lamEqB V) sqcap eqB p
    (opairB
      (lamAppB (lamAbsB (V.child x) (encodeLamB V M)) (encodeLamB V N))
      (encodeLamB V (Lam.substCA M x N)))) = top := by
  refine iInf_eq_top.mpr fun x => iInf_eq_top.mpr fun M => iInf_eq_top.mpr fun N => ?_
  refine top_unique (le_iSup_of_le
    (encodeEqB V ((Lam.abs x M).app N) (Lam.substCA M x N)) ?_)
  have hmem : memB (encodeEqB V ((Lam.abs x M).app N) (Lam.substCA M x N))
    (lamEqB V) = top :=
    memB_encodeEqB V _ _ (LamEq.beta x M N)
  rw [hmem, encodeEqB, encodeLamB, encodeLamB, eqB_self, top_inf_eq]

theorem lamEqInductiveB_alpha (V : AName.{u} A) [DecidableEq V.idx] :
  (? x : V.idx, ? y : V.idx, ? M : Lam V.idx,
    ? _ : y notin M.fv,
    bigcup p : AName.{u} A, memB p (lamEqB V) sqcap eqB p
    (opairB (lamAbsB (V.child x) (encodeLamB V M))
      (lamAbsB (V.child y)
        (encodeLamB V (Lam.substCA M x (Lam.var y)))))) = top := by
  refine iInf_eq_top.mpr fun x => iInf_eq_top.mpr fun y =>
    iInf_eq_top.mpr fun M => iInf_eq_top.mpr fun hy => ?_
  refine top_unique (le_iSup_of_le
    (encodeEqB V (Lam.abs x M) (Lam.abs y (Lam.substCA M x (Lam.var y)))) ?_)
  have hmem :
    memB (encodeEqB V (Lam.abs x M)
      (Lam.abs y (Lam.substCA M x (Lam.var y)))) (lamEqB V) = top :=
    memB_encodeEqB V _ _ (LamEq.alpha x y M hy)
  rw [hmem, encodeEqB, encodeLamB, encodeLamB, eqB_self, top_inf_eq]

/-- `lamEqB V` satisfies the Example 24 clauses at Boolean value `1`. -/
theorem lamEqInductiveB_lamEqB (V : AName.{u} A) [DecidableEq V.idx] :
  lamEqInductiveB V (lamEqB V) = top := by
  rw [lamEqInductiveB]
  exact inf_eq_top_iff.mpr
  <inf_eq_top_iff.mpr
  <inf_eq_top_iff.mpr
  <inf_eq_top_iff.mpr
  <inf_eq_top_iff.mpr
  <inf_eq_top_iff.mpr
  <inf_eq_top_iff.mpr <lamEqInductiveB_refl V, lamEqInductiveB_symm V>,
    lamEqInductiveB_trans V>,
    lamEqInductiveB_app_left V>,
    lamEqInductiveB_app_right V>,
    lamEqInductiveB_xi V>,
    lamEqInductiveB_beta V>,
    lamEqInductiveB_alpha V>

theorem lamEqInductiveB_parts {V S : AName.{u} A} [DecidableEq V.idx]
  (h : lamEqInductiveB V S = top) :
  (? M : Lam V.idx,

```

```

      bigcup p : AName.{u} A, memB p S sqcap eqB p (encodeEqB V M M)) = top /\
    (? e : LamEqIdx V,
      bigcup p : AName.{u} A, memB p S sqcap eqB p (encodeEqB V e.1.2 e.1.1)) = top /\
    (? M : Lam V.idx, ? N : Lam V.idx, ? L : Lam V.idx,
      ? _ : LamEq M N, ? _ : LamEq N L,
      bigcup p : AName.{u} A, memB p S sqcap eqB p (encodeEqB V M L)) = top /\
    (? e : LamEqIdx V, ? Z : Lam V.idx,
      bigcup p : AName.{u} A, memB p S sqcap eqB p
        (opairB (lamAppB (encodeLamB V e.1.1) (encodeLamB V Z))
          (lamAppB (encodeLamB V e.1.2) (encodeLamB V Z)))) = top /\
    (? e : LamEqIdx V, ? Z : Lam V.idx,
      bigcup p : AName.{u} A, memB p S sqcap eqB p
        (opairB (lamAppB (encodeLamB V Z) (encodeLamB V e.1.1))
          (lamAppB (encodeLamB V Z) (encodeLamB V e.1.2)))) = top /\
    (? x : V.idx, ? e : LamEqIdx V,
      bigcup p : AName.{u} A, memB p S sqcap eqB p
        (opairB (lamAbsB (V.child x) (encodeLamB V e.1.1))
          (lamAbsB (V.child x) (encodeLamB V e.1.2)))) = top /\
    (? x : V.idx, ? M : Lam V.idx, ? N : Lam V.idx,
      bigcup p : AName.{u} A, memB p S sqcap eqB p
        (opairB
          (lamAppB (lamAbsB (V.child x) (encodeLamB V M)) (encodeLamB V N))
            (encodeLamB V (Lam.substCA M x N)))) = top /\
    (? x : V.idx, ? y : V.idx, ? M : Lam V.idx,
      ? _ : y notin M.fv,
      bigcup p : AName.{u} A, memB p S sqcap eqB p
        (opairB (lamAbsB (V.child x) (encodeLamB V M))
          (lamAbsB (V.child y)
            (encodeLamB V (Lam.substCA M x (Lam.var y)))))) = top := by
  have ha := inf_eq_top_iff.mp h
  have hb := inf_eq_top_iff.mp ha.1
  have h? := inf_eq_top_iff.mp hb.1
  have happR := inf_eq_top_iff.mp h?.1
  have happL := inf_eq_top_iff.mp happR.1
  have htr := inf_eq_top_iff.mp happL.1
  have hrs := inf_eq_top_iff.mp htr.1
  exact <hrs.1, hrs.2, htr.2, happL.2, happR.2, h?.2, hb.2, ha.2>

/-- Every encoded ground equation belongs to an inductive name, by induction
on `LamEq` (paper: ?by induction on the structure of an element of `fun`?). -/
theorem memB_encodeEqB_of_inductive {V S : AName.{u} A} [DecidableEq V.idx]
  (h : lamEqInductiveB V S = top) {M N : Lam V.idx} (heq : LamEq M N) :
  memB (encodeEqB V M N) S = top := by
  induction heq with
  | refl M =>
    exact memB_of_exists_eqB S (encodeEqB V M M)
      (iInf_eq_top.mp (lamEqInductiveB_parts h).1 M)
  | @symm M N hMN _ =>
    exact memB_of_exists_eqB S (encodeEqB V N M)
      (iInf_eq_top.mp (lamEqInductiveB_parts h).2.1 <(M, N), hMN>)
  | @trans M N L hMN hNL _ _ =>
    have htr :
      (? _ : LamEq M N, ? _ : LamEq N L,
        bigcup p : AName.{u} A, memB p S sqcap eqB p (encodeEqB V M L)) = top :=
      iInf_eq_top.mp (iInf_eq_top.mp (iInf_eq_top.mp
        (lamEqInductiveB_parts h).2.2.1 M) N) L
    exact memB_of_exists_eqB S (encodeEqB V M L)
      (iInf_eq_top.mp (iInf_eq_top.mp htr hMN) hNL)
  | @app_left M N Z hMN _ =>
    have happ :=
      iInf_eq_top.mp (iInf_eq_top.mp (lamEqInductiveB_parts h).2.2.2.1
        <(M, N), hMN>) Z
    exact memB_of_exists_eqB S (encodeEqB V (M.app Z) (N.app Z)) happ

```

```

| @app_right M N Z hMN _ =>
  have happ :=
    iInf_eq_top.mp (iInf_eq_top.mp (lamEqInductiveB_parts h).2.2.2.2.1
      <(M, N), hMN>) Z
  exact memB_of_exists_eqB S (encodeEqB V (Z.app M) (Z.app N)) happ
| @xi x M N hMN _ =>
  have hxi :=
    iInf_eq_top.mp (iInf_eq_top.mp (lamEqInductiveB_parts h).2.2.2.2.2.1 x)
      <(M, N), hMN>
  exact memB_of_exists_eqB S (encodeEqB V (Lam.abs x M) (Lam.abs x N)) hxi
| beta x M N =>
  have hb :=
    iInf_eq_top.mp
      (iInf_eq_top.mp
        (iInf_eq_top.mp (lamEqInductiveB_parts h).2.2.2.2.2.2.1 x) M) N
  exact memB_of_exists_eqB S
    (encodeEqB V ((Lam.abs x M).app N) (Lam.substCA M x N)) hb
| alpha x y M hy =>
  have ha :=
    iInf_eq_top.mp
      (iInf_eq_top.mp
        (iInf_eq_top.mp
          (iInf_eq_top.mp (lamEqInductiveB_parts h).2.2.2.2.2.2.2 x) y) M) hy
  exact memB_of_exists_eqB S
    (encodeEqB V (Lam.abs x M) (Lam.abs y (Lam.substCA M x (Lam.var y)))) ha

/-- Check commutation for encoded equations. -/
theorem check_encodeEq (Var : PSet.{u}) (M N : Lam Var.Type) :
  eqB (check (A := A) (encodeEq Var.Func M N))
    (encodeEqB
      (mk Var.Type (fun i => check (A := A) (Var.Func i)) (fun _ => top)) M N) =
    top := by
  have hpair :=
    check_opair (A := A) (encodeLam Var.Func M) (encodeLam Var.Func N)
  have hM := check_encodeLam (A := A) Var M
  have hN := check_encodeLam (A := A) Var N
  exact eqB_top_trans hpair (eqB_opairB_top hM hN)

theorem check_idx_eq (Var : PSet.{u}) :
  (check (A := A) Var).idx = Var.Type := by
  cases Var
  rfl

instance instDecidableEq_check_idx (Var : PSet.{u}) [DecidableEq Var.Type] :
  DecidableEq (check (A := A) Var).idx :=
  (check_idx_eq (A := A) Var).symm |> inferInstance

/-- Unfolding of `check Var`, with `idx` definitionally `Var.Type`.
`check_eq_mk` identifies this name with `check Var`. -/
noncomputable abbrev checkVar (Var : PSet.{u}) : AName.{u} A :=
  mk Var.Type (fun i => check (A := A) (Var.Func i)) (fun _ => top)

instance instDecidableEq_checkVar_idx (Var : PSet.{u}) [DecidableEq Var.Type] :
  DecidableEq (checkVar (A := A) Var).idx :=
  inferInstanceAs (DecidableEq Var.Type)

theorem checkVar_eq (Var : PSet.{u}) : checkVar (A := A) Var = check Var :=
  (check_eq_mk (A := A) Var).symm

/-- Example 24, subset: `?check(fun ) subseteq lamEqB (checkVar Var)? = 1`. -/
theorem lamEq_check_subset (Var : PSet.{u}) [DecidableEq Var.Type] :
  subsetB (check (A := A) (pLamEqSet Var)) (lamEqB (checkVar Var)) = top := by
  rw [pLamEqSet, check_mk, subsetB_mk]

```

```

refine iInf_eq_top.mpr fun e => himp_eq_top_iff.mpr ?_
have hmem : memB (encodeEqB (checkVar (A := A) Var) e.1.1 e.1.2)
  (lamEqB (checkVar Var)) = top :=
  memB_encodeEqB_of_inductive (lamEqInductiveB_lamEqB (checkVar (A := A) Var)) e.2
have heq : eqB (check (A := A) (encodeEq Var.Func e.1.1 e.1.2))
  (encodeEqB (checkVar (A := A) Var) e.1.1 e.1.2) = top :=
  check_encodeEq (A := A) Var e.1.1 e.1.2
rw [eqB_top_memB_left (z := lamEqB (checkVar (A := A) Var)) heq]
exact hmem.ge

end Scott2026

```

A.22 Scott2026/LambdaConstVA.lean

350 lines.

Lean 4 source

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/

import Scott2026.LambdaVA

/-!
# Constant-bearing lambda syntax in  $\lambda^A$ 

This is Example 21 and Definition 20 with the paper's fourth tag  $(3,d)$ .
Unlike the pure checked-variable presentation, an arbitrary Boolean-valued
constant set need not have extent  $\text{top}$ ; term extents are therefore propagated
recursively through the inductive constructors.
-/

universe u

namespace Scott2026

open AName

/-- Definition 20 syntax, with variables and denotational constants kept as
separate index types. -/
inductive LamDK (Var Const : Type u) : Type u where
| var (x : Var)
| const (d : Const)
| abs (x : Var) (M : LamDK Var Const)
| app (M N : LamDK Var Const)

/-- Embed pure lambda syntax in the constant-bearing language. -/
def LamDK.ofLam {Var Const : Type u} : Lam Var -> LamDK Var Const
| .var x => .var x
| .abs x M => .abs x (ofLam M)
| .app M N => .app (ofLam M) (ofLam N)

/-- Paper tag  $3$ : a constant appears as  $(3,d)$ . -/
def pLamConst (d : PSet.{u}) : PSet.{u} :=
  p0pair (PSet.ofNat 3) d

/-- Ground tagged encoding of Definition 20 terms. -/
def encodeLamDK {Var Const : Type u} (f : Var -> PSet.{u})
  (g : Const -> PSet.{u}) : LamDK Var Const -> PSet.{u}
| .var x => pLamVar (f x)

```

```

| .const d => pLamConst (g d)
| .abs x M => pLamAbs (f x) (encodeLamDK f g M)
| .app M N => pLamApp (encodeLamDK f g M) (encodeLamDK f g N)

/-- Ground set `(D,Var,K)`; `D` is part of the notation while the syntax
depends only on `Var` and `K`. -/
def pLamDKSet (D Var K : PSet.{u}) : PSet.{u} :=
  PSet.mk (LamDK Var.Type K.Type) (encodeLamDK Var.Func K.Func)

variable {A : Type u} [CompleteBooleanAlgebra A]

/-- Internal constant encoding `(3,d)^A`. -/
noncomputable def lamConstB (d : AName.{u} A) : AName.{u} A :=
  opairB (check (PSet.ofNat 3)) d

/-- Internal tagged encoding of Definition 20 terms. -/
noncomputable def encodeLamDKB (V K : AName.{u} A) :
  LamDK V.idx K.idx -> AName.{u} A
| .var x => lamVarB (V.child x)
| .const d => lamConstB (K.child d)
| .abs x M => lamAbsB (V.child x) (encodeLamDKB V K M)
| .app M N => lamAppB (encodeLamDKB V K M) (encodeLamDKB V K N)

/-- Boolean extent of a Definition 20 term. -/
noncomputable def lamDKVal (V K : AName.{u} A) :
  LamDK V.idx K.idx -> A
| .var x => memB (V.child x) V
| .const d => memB (K.child d) K
| .abs x M => memB (V.child x) V sqcap lamDKVal V K M
| .app M N => lamDKVal V K M sqcap lamDKVal V K N

/-- `(D,V,K)^A`. The parameter `D` records the ambient denotational domain;
well-formed uses require `K` subsesteq `D`. -/
noncomputable def lamDKB (D V K : AName.{u} A) : AName.{u} A :=
  mk (LamDK V.idx K.idx) (encodeLamDKB V K) (lamDKVal V K)

/-- Boolean value of the paper's constant-bearing inductive clause. -/
noncomputable def lamDKInductiveB
  (D V K X : AName.{u} A) : A :=
  lamInductiveB V X sqcap
  ? d : AName.{u} A, memB d K ?
  bigcup p : AName.{u} A, memB p X sqcap eqB p (lamConstB d)

theorem eqB_lamConstB (d e : AName.{u} A) :
  eqB (lamConstB d) (lamConstB e) = eqB d e := by
  rw [lamConstB, lamConstB, eqB_opairB, eqB_self, top_inf_eq]

theorem memB_lamDKB (z D V K : AName.{u} A) :
  memB z (lamDKB D V K) =
    bigcup M : LamDK V.idx K.idx,
    eqB z (encodeLamDKB V K M) sqcap lamDKVal V K M := by
  rw [lamDKB, memB_mk]

theorem lamDKVal_le_memB (D V K : AName.{u} A)
  (M : LamDK V.idx K.idx) :
  lamDKVal V K M <= memB (encodeLamDKB V K M) (lamDKB D V K) := by
  rw [memB_lamDKB]
  refine le_iSup_of_le M ?_
  rw [eqB_self, top_inf_eq]

/-- Constant constructor closure. -/
theorem lamDKInductiveB_const (D V K : AName.{u} A) :
  (? d : AName.{u} A, memB d K ?

```

```

    bigcup p : AName.{u} A,
    memB p (lamDKB D V K) sqcap eqB p (lamConstB d)) = top := by
refine iInf_eq_top.mpr fun d => himp_eq_top_iff.mpr ?_
rw [memB_eq]
refine iSup_le fun i => ?_
refine le_iSup_of_le (encodeLamDKB V K (.const i)) ?_
change eqB d (K.child i) sqcap K.val i <=
  memB (lamConstB (K.child i)) (lamDKB D V K) sqcap
  eqB (lamConstB (K.child i)) (lamConstB d)
refine le_inf ?_ ?_
* exact (lamDKVal_le_memB D V K (.const i)).trans'
  (inf_le_right.trans (val_le_memB K i))
* rw [eqB_lamConstB, eqB_comm]
  exact inf_le_left

/-- Variable constructor closure. -/
theorem lamDKInductiveB_var (D V K : AName.{u} A) :
  (? x : AName.{u} A, memB x V ?
    bigcup p : AName.{u} A,
    memB p (lamDKB D V K) sqcap eqB p (lamVarB x)) = top := by
refine iInf_eq_top.mpr fun x => himp_eq_top_iff.mpr ?_
rw [memB_eq]
refine iSup_le fun i => ?_
refine le_iSup_of_le (encodeLamDKB V K (.var i)) ?_
change eqB x (V.child i) sqcap V.val i <=
  memB (lamVarB (V.child i)) (lamDKB D V K) sqcap
  eqB (lamVarB (V.child i)) (lamVarB x)
refine le_inf ?_ ?_
* exact (lamDKVal_le_memB D V K (.var i)).trans'
  (inf_le_right.trans (val_le_memB V i))
* rw [eqB_lamVarB, eqB_comm]
  exact inf_le_left

/-- Abstraction constructor closure. -/
theorem lamDKInductiveB_abs (D V K : AName.{u} A) :
  (? x : AName.{u} A, memB x V ?
    ? M : AName.{u} A, memB M (lamDKB D V K) ?
    bigcup p : AName.{u} A,
    memB p (lamDKB D V K) sqcap eqB p (lamAbsB x M)) = top := by
refine iInf_eq_top.mpr fun x => himp_eq_top_iff.mpr ?_
refine le_iInf fun M => ?_
rw [le_himp_iff, memB_eq (x := x) (y := V), memB_lamDKB, iSup_inf_eq]
refine iSup_le fun i => ?_
rw [inf_iSup_eq]
refine iSup_le fun N => ?_
refine le_iSup_of_le (encodeLamDKB V K (.abs i N)) ?_
change (eqB x (V.child i) sqcap V.val i) sqcap
  (eqB M (encodeLamDKB V K N) sqcap lamDKVal V K N) <=
  memB (lamAbsB (V.child i) (encodeLamDKB V K N)) (lamDKB D V K) sqcap
  eqB (lamAbsB (V.child i) (encodeLamDKB V K N)) (lamAbsB x M)
refine le_inf ?_ ?_
* refine (lamDKVal_le_memB D V K (.abs i N)).trans' (le_inf ?_ ?_)
* exact (val_le_memB V i).trans' (inf_le_left.trans inf_le_right)
* exact inf_le_right.trans inf_le_right
* rw [eqB_lamAbsB, eqB_comm (x := V.child i) (y := x),
  eqB_comm (x := encodeLamDKB V K N) (y := M)]
  exact le_inf (inf_le_left.trans inf_le_left)
  (inf_le_right.trans inf_le_left)

/-- Application constructor closure. -/
theorem lamDKInductiveB_app (D V K : AName.{u} A) :
  (? M : AName.{u} A, memB M (lamDKB D V K) ?
    ? N : AName.{u} A, memB N (lamDKB D V K) ?

```

```

      bigcup p : AName.{u} A,
      memB p (lamDKB D V K) sqcap eqB p (lamAppB M N)) = top := by
refine iInf_eq_top.mpr fun M => himp_eq_top_iff.mpr ?_
refine le_iInf fun N => ?_
rw [le_himp_iff, memB_lamDKB (z := M), memB_lamDKB (z := N), iSup_inf_eq]
refine iSup_le fun M' => ?_
rw [inf_iSup_eq]
refine iSup_le fun N' => ?_
refine le_iSup_of_le (encodeLamDKB V K (.app M' N')) ?_
change (eqB M (encodeLamDKB V K M')) sqcap lamDKVal V K M' sqcap
  (eqB N (encodeLamDKB V K N')) sqcap lamDKVal V K N' <=
  memB (lamAppB (encodeLamDKB V K M') (encodeLamDKB V K N'))
    (lamDKB D V K) sqcap
    eqB (lamAppB (encodeLamDKB V K M') (encodeLamDKB V K N'))
      (lamAppB M N)
refine le_inf ?_ ?_
* exact (lamDKVal_le_memB D V K (.app M' N')).trans'
  (le_inf (inf_le_left.trans inf_le_right)
    (inf_le_right.trans inf_le_right))
* rw [eqB_lamAppB, eqB_comm (x := encodeLamDKB V K M') (y := M),
  eqB_comm (x := encodeLamDKB V K N') (y := N)]
  exact le_inf (inf_le_left.trans inf_le_left)
    (inf_le_right.trans inf_le_left)

/-- `(D,V,K)^A` satisfies all four Example 21 clauses. -/
theorem lamDKInductiveB_lamDKB (D V K : AName.{u} A) :
  lamDKInductiveB D V K (lamDKB D V K) = top := by
  unfold lamDKInductiveB lamInductiveB
  refine inf_eq_top_iff.mpr <?_, lamDKInductiveB_const D V K>
  refine inf_eq_top_iff.mpr <?_, lamDKInductiveB_app D V K>
  exact inf_eq_top_iff.mpr
    <lamDKInductiveB_var D V K, lamDKInductiveB_abs D V K>

/-- Equality witnesses in a name evaluate below membership of their target. -/
theorem iSup_memB_inf_eqB_le (X t : AName.{u} A) :
  (bigcup p : AName.{u} A, memB p X sqcap eqB p t) <= memB t X :=
  iSup_le fun p => memB_eqB_left p X t

theorem lamDKInductiveB_pure_part {D V K X : AName.{u} A}
  (h : lamDKInductiveB D V K X = top) :
  lamInductiveB V X = top :=
  (inf_eq_top_iff.mp h).1

theorem lamDKInductiveB_const_le {D V K X : AName.{u} A}
  (h : lamDKInductiveB D V K X = top) (d : AName.{u} A) :
  memB d K <=
    bigcup p : AName.{u} A, memB p X sqcap eqB p (lamConstB d) :=
  himp_eq_top_iff.mp
    (iInf_eq_top.mp (inf_eq_top_iff.mp h).2 d)

/-- Structural leastness estimate for arbitrary Boolean-valued variables and
constants. -/
theorem lamDKVal_le_memB_of_inductive {D V K X : AName.{u} A}
  (h : lamDKInductiveB D V K X = top)
  (M : LamDK V.idx K.idx) :
  lamDKVal V K M <= memB (encodeLamDKB V K M) X := by
  induction M with
  | var x =>
    exact (lamInductiveB_var_le (lamDKInductiveB_pure_part h) (V.child x)).trans
      (iSup_memB_inf_eqB_le X (lamVarB (V.child x)))
  | const d =>
    exact (lamDKInductiveB_const_le h (K.child d)).trans
      (iSup_memB_inf_eqB_le X (lamConstB (K.child d)))

```



```

| abs x M ih =>
  calc
    lamDKVal V K (.abs x M) <=
      memB (V.child x) V sqcap memB (encodeLamDKB V K M) X :=
        le_inf inf_le_left (inf_le_right.trans ih)
    - <= bigcup p : AName.{u} A,
      memB p X sqcap eqB p
        (lamAbsB (V.child x) (encodeLamDKB V K M)) :=
        lamInductiveB_abs_le (lamDKInductiveB_pure_part h)
          (V.child x) (encodeLamDKB V K M)
    - <= memB (encodeLamDKB V K (.abs x M)) X :=
        iSup_memB_inf_eqB_le X
          (lamAbsB (V.child x) (encodeLamDKB V K M))
| app M N ihM ihN =>
  calc
    lamDKVal V K (.app M N) <=
      memB (encodeLamDKB V K M) X sqcap memB (encodeLamDKB V K N) X :=
        le_inf (inf_le_left.trans ihM) (inf_le_right.trans ihN)
    - <= bigcup p : AName.{u} A,
      memB p X sqcap eqB p
        (lamAppB (encodeLamDKB V K M) (encodeLamDKB V K N)) :=
        lamInductiveB_app_le (lamDKInductiveB_pure_part h)
          (encodeLamDKB V K M) (encodeLamDKB V K N)
    - <= memB (encodeLamDKB V K (.app M N)) X :=
        iSup_memB_inf_eqB_le X
          (lamAppB (encodeLamDKB V K M) (encodeLamDKB V K N))

/-- `?(D,V,K)^A` is the least name satisfying the four inductive clauses. -/
theorem lamDKB_least {D V K X : AName.{u} A}
  (h : lamDKInductiveB D V K X = top) :
  subsetB (lamDKB D V K) X = top := by
  rw [lamDKB, subsetB_mk]
  refine iInf_eq_top.mpr fun M => himp_eq_top_iff.mpr ?_
  exact lamDKVal_le_memB_of_inductive h M

/-- Every ground checked term has full Boolean extent. -/
theorem lamDKVal_check (Var K : PSet.{u})
  (M : LamDK (check (A := A) Var).idx (check (A := A) K).idx) :
  lamDKVal (check (A := A) Var) (check (A := A) K) M = top := by
  induction M with
  | var x => exact memB_check_child Var x
  | const d => exact memB_check_child K d
  | abs x M ih => rw [lamDKVal, memB_check_child, ih, top_inf_eq]
  | app M N ihM ihN => rw [lamDKVal, ihM, ihN, top_inf_eq]

/-- Ground and internal tag encodings agree for all four constructors. -/
theorem check_encodeLamDK (Var K : PSet.{u})
  (M : LamDK Var.Type K.Type) :
  eqB (check (A := A) (encodeLamDK Var.Func K.Func M))
    (encodeLamDKB
      (mk Var.Type (fun i => check (A := A) (Var.Func i)) (fun _ => top))
      (mk K.Type (fun i => check (A := A) (K.Func i)) (fun _ => top)) M) = top := by
  induction M with
  | var x => exact check_opair (A := A) (PSet.ofNat 0) (Var.Func x)
  | const d => exact check_opair (A := A) (PSet.ofNat 3) (K.Func d)
  | abs x M ih =>
    exact eqB_top_trans
      (eqB_top_trans
        (check_opair (A := A) (PSet.ofNat 1)
          (pOpair (Var.Func x) (encodeLamDK Var.Func K.Func M)))
        (eqB_opairB_top (eqB_self _)
          (check_opair (A := A) (Var.Func x)
            (encodeLamDK Var.Func K.Func M))))

```

```

      (eqB_opairB_top (eqB_self _)
        (eqB_opairB_top (eqB_self _) ih))
| app M N ihM ihN =>
  exact eqB_top_trans
    (eqB_top_trans
      (check_opair (A := A) (PSet.ofNat 2)
        (pOpair (encodeLamDK Var.Func K.Func M)
          (encodeLamDK Var.Func K.Func N)))
      (eqB_opairB_top (eqB_self _)
        (check_opair (A := A) (encodeLamDK Var.Func K.Func M)
          (encodeLamDK Var.Func K.Func N))))
    (eqB_opairB_top (eqB_self _) (eqB_opairB_top ihM ihN))

/-- Check commutation for the full Definition 20 syntax. -/
theorem lamDKB_check_eq (D Var K : PSet.{u}) :
  eqB (check (A := A) (pLamDKSet D Var K))
    (lamDKB (check (A := A) D) (check (A := A) Var)
      (check (A := A) K)) = top := by
  rw [check_eq_mk (A := A) D, check_eq_mk (A := A) Var,
    check_eq_mk (A := A) K, pLamDKSet, check_mk, lamDKB]
  have hv :
    lamDKVal
      (mk Var.Type (fun i => check (A := A) (Var.Func i)) (fun _ => top))
      (mk K.Type (fun i => check (A := A) (K.Func i)) (fun _ => top)) =
      fun _ => top := by
  funext M
  have hV (i :
    (mk Var.Type (fun j => check (A := A) (Var.Func j)) (fun _ => top)).idx) :
    memB
      ((mk Var.Type (fun j => check (A := A) (Var.Func j))
        (fun _ => top)).child i)
      (mk Var.Type (fun j => check (A := A) (Var.Func j)) (fun _ => top)) = top := by
  apply top_unique
  exact (val_le_memB
    (mk Var.Type (fun j => check (A := A) (Var.Func j)) (fun _ => top)) i)
  have hK (i :
    (mk K.Type (fun j => check (A := A) (K.Func j)) (fun _ => top)).idx) :
    memB
      ((mk K.Type (fun j => check (A := A) (K.Func j))
        (fun _ => top)).child i)
      (mk K.Type (fun j => check (A := A) (K.Func j)) (fun _ => top)) = top := by
  apply top_unique
  exact (val_le_memB
    (mk K.Type (fun j => check (A := A) (K.Func j)) (fun _ => top)) i)
  induction M with
  | var x => exact hV x
  | const d => exact hK d
  | abs x M ih => rw [lamDKVal, hV, ih, top_inf_eq]
  | app M N ihM ihN => rw [lamDKVal, ihM, ihN, top_inf_eq]
  rw [hv]
  exact eqB_mk_top _ _ (check_encodeLamDK (A := A) Var K)

end Scott2026

```

A.23 Scott2026/InterpConst.lean

84 lines.

Lean 4 source

/-

Copyright (c) 2026 Lars Warren Ericson. All rights reserved.

Released under Apache 2.0 license as described in the file LICENSE.

Authors: Lars Warren Ericson.

-/

```
import Scott2026.Interp
import Scott2026.LambdaConstVA
```

/-!

Definition 25 with constants

The paper cites Barendregt for this recursion and its pure equational soundness. This file gives the four defining equations directly in Lean for the repository's complete-lattice presentation of a reflexive dcpo.

-/

universe u

namespace Scott2026

variable {Var Const D : Type u} [DecidableEq Var] [CompleteLattice D]

/-- Definition 25 on $\lambda(D, \text{Var}, K)$, with constants interpreted by $\lambda^?$. -/

noncomputable def interpDK

```
(R : ReflexiveDcpo D) (? : Const -> D) :
  LamDK Var Const -> Valuation Var D -> D
| .var x, ? => ?.toFun x
| .const d, _ => ? d
| .app M N, ? => R.app (interpDK R ? M ?) (interpDK R ? N ?)
| .abs x M, ? => R.lam fun d => interpDK R ? M (?.update x d)
```

theorem interpDK_var (R : ReflexiveDcpo D) (? : Const -> D)
(x : Var) (? : Valuation Var D) :
 interpDK R ? (.var x) ? = ?.toFun x := rfl

theorem interpDK_const (R : ReflexiveDcpo D) (? : Const -> D)
(d : Const) (? : Valuation Var D) :
 interpDK R ? (.const d) ? = ? d := rfl

theorem interpDK_app (R : ReflexiveDcpo D) (? : Const -> D)
(M N : LamDK Var Const) (? : Valuation Var D) :
 interpDK R ? (.app M N) ? =
 R.app (interpDK R ? M ?) (interpDK R ? N ?) := rfl

theorem interpDK_abs (R : ReflexiveDcpo D) (? : Const -> D)
(x : Var) (M : LamDK Var Const) (? : Valuation Var D) :
 interpDK R ? (.abs x M) ? =
 R.lam (fun d => interpDK R ? M (?.update x d)) := rfl

/-- On pure terms, Definition 25 with constants is the existing pure interpretation. -/

theorem interpDK_ofLam (R : ReflexiveDcpo D) (? : Const -> D)
(M : Lam Var) (? : Valuation Var D) :
 interpDK R ? (LamDK.ofLam M) ? = interp R M ? := by
 induction M generalizing ? with
 | var x => rfl
 | app M N ihM ihN =>
 simp only [LamDK.ofLam, interpDK, interp]
 rw [ihM, ihN]
 | abs x M ih =>
 simp only [LamDK.ofLam, interpDK, interp]
 congr 1
 funext d
 exact ih (?.update x d)

```

/-- Definition 25's cited pure soundness theorem, viewed inside the
constant-bearing language. -/
theorem interpDK_pure_sound (R : ReflexiveDcpo D) (? : Const -> D)
  {M N : Lam Var} (h : LamEqNC M N) (? : Valuation Var D) :
  interpDK R ? (LamDK.ofLam M) ? =
    interpDK R ? (LamDK.ofLam N) ? := by
  rw [interpDK_ofLam, interpDK_ofLam]
  exact interp_sound R h ?

/-- Full capture-avoiding pure soundness in the constant-bearing language. -/
theorem interpDK_pure_sound_full (R : ReflexiveDcpo D) (? : Const -> D)
  [Infinite Var] {M N : Lam Var} (h : LamEq M N) (? : Valuation Var D) :
  interpDK R ? (LamDK.ofLam M) ? =
    interpDK R ? (LamDK.ofLam N) ? := by
  rw [interpDK_ofLam, interpDK_ofLam]
  exact interp_sound_full R h ?

end Scott2026

```

A.24 Scott2026/InterpVA.lean

985 lines.

Lean 4 source (lines 1–400)

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/

import Scott2026.EngelerVA
import Scott2026.Interp
import Scott2026.LambdaVA

/-!
# Theorem 26, pure-term fragment, on the Theorem 30 carrier

Furber-Mardare-Panangaden-Scott, CSL 2026, Theorem 26, restricted to
`?(Var)` (no constants / tag 3) and the Engeler carrier of Theorem 30
(`CanonicalPowerIdx` of `check ?`). This is not the paper's full
statement: there is no `?(D, check Var, ?)^A`, no internal
`?is a reflexive dcpo?` hypothesis, and no Theorem 1 transfer.

The interpretation `interpVA` uses the Definition 25 clauses with
`engelerAppVA` / `engelerLamVA`. The meta-lambda is
`DeterminedByFiniteVA`, so `theorem_30_retract` applies. Soundness is
the capture-free fragment `LamEqNC` (`FreeFor` at b), matching
`interp_sound` on the ground `ReflexiveDcpo`. Capturing `LamEq.beta`
is not claimed.

`SetoidF_A` packaging of this Lean map as a `RelFun` /
`functionalOfRel` on `oid(lamB (check Var))` or
`oid(check (pLamSet Var))` is not proved. The missing lemma is
congruence of `interpVA` under `eqB (encodeLamB M) (encodeLamB N)`
(or injectivity of `encodeLamB` at every Boolean value, which needs
pairwise Boolean-unequal variable children). Definition 16 `oidRel`
would need a function *name* with `isFunctionB = top`, which has the
same single-valuedness obligation. This is not Theorem 1(i).
-/

universe u

```

```

namespace Scott2026

open AName

variable {A : Type u} [CompleteBooleanAlgebra A]

noncomputable section

/-!
## Carrier abbreviations
-/

/-- Theorem 30 carrier: canonical indices of  $P^A(\text{check } ?)$ . -/
abbrev EngelerCarrier : Type u :=
  CanonicalPowerIdx (check (A := A) PSet.omega)

/-- Child name of a canonical Engeler element. -/
abbrev child? (p : EngelerCarrier (A := A)) : AName.{u} A :=
  (powerB (check (A := A) PSet.omega)).child p.1

/-- Numeral membership in a canonical Engeler element. -/
abbrev memOfNat (p : EngelerCarrier (A := A)) (n : Nat) : A :=
  memB (check (PSet.ofNat n)) (child? (A := A) p)

/-!
## Finite-subset calculations
-/

theorem subsetB_finsetPSet_empty (X : AName.{u} A) :
  subsetB (check (A := A) (finsetPSet ({} : Finset Nat))) X = top := by
  rw [subsetB_finsetPSet]
  exact iInf_eq_top.mpr fun n => (Finset.notMem_empty n.1 n.2).elim

theorem subsetB_finsetPSet_singleton (n : Nat) (X : AName.{u} A) :
  subsetB (check (A := A) (finsetPSet {n})) X =
    memB (check (PSet.ofNat n)) X := by
  rw [subsetB_finsetPSet]
  refine le_antisymm ?le ?ge
  * exact iInf_le (fun k : {k // k in ({n} : Finset Nat)} =>
    memB (check (PSet.ofNat k.1)) X) <n, Finset.mem_singleton_self n>
  * refine le_iInf fun k => ?_
    have hk : k.1 = n := Finset.mem_singleton.mp k.2
    rw [hk]

theorem subsetB_finsetPSet_union (K L : Finset Nat) (X : AName.{u} A) :
  subsetB (check (A := A) (finsetPSet (K U L))) X =
    subsetB (check (finsetPSet K)) X sqcap
    subsetB (check (finsetPSet L)) X := by
  rw [subsetB_finsetPSet, subsetB_finsetPSet, subsetB_finsetPSet]
  refine le_antisymm ?le ?ge
  * refine le_inf (le_iInf fun n => ?_) (le_iInf fun n => ?_)
    * exact iInf_le (fun k : {k // k in K U L} =>
      memB (check (PSet.ofNat k.1)) X)
      <n.1, Finset.mem_union_left L n.2>
    * exact iInf_le (fun k : {k // k in K U L} =>
      memB (check (PSet.ofNat k.1)) X)
      <n.1, Finset.mem_union_right K n.2>
  * refine le_iInf fun n => ?_
    rcases Finset.mem_union.mp n.2 with hK | hL
  * exact inf_le_of_left_le
    (iInf_le (fun k : {k // k in K} =>
      memB (check (PSet.ofNat k.1)) X) <n.1, hK>)

```

```

* exact inf_le_of_right_le
  (iInf_le (fun k : {k // k in L} =>
    memB (check (PSet.ofNat k.1)) X) <n.1, hL>)

theorem subsetB_finsetPSet_of_subset {K L : Finset Nat} (h : K subseq L)
  (X : AName.{u} A) :
  subsetB (check (A := A) (finsetPSet L)) X <=
  subsetB (check (finsetPSet K)) X := by
  rw [subsetB_finsetPSet, subsetB_finsetPSet]
  exact le_iInf fun n =>
    iInf_le (fun k : {k // k in L} => memB (check (PSet.ofNat k.1)) X)
    <n.1, h n.2>

theorem iInf_insert_subtype {α : Type*} [DecidableEq α]
  (a : α) (s : Finset α) (ha : a notin s) (f : α → A) :
  (i : {x // x in insert a s}, f i.1) =
  f a sqcap i : {x // x in s}, f i.1 := by
  refine le_antisymm ?le ?ge
* exact le_inf
  (iInf_le (fun i : {x // x in insert a s} => f i.1)
    <a, Finset.mem_insert_self a s>)
  (le_iInf fun i =>
    iInf_le (fun j : {x // x in insert a s} => f j.1)
    <i.1, Finset.mem_insert_of_mem i.2>)
* refine le_iInf fun i => ?_
  rcases Finset.mem_insert.mp i.2 with hi | hi
* rw [show i.1 = a from hi]
  exact inf_le_left
* exact inf_le_of_right_le
  (iInf_le (fun j : {x // x in s} => f j.1) <i.1, hi>)

theorem subsetB_finsetPSet_sup {α : Type*} [DecidableEq α]
  (s : Finset α) (F : α → Finset Nat) (X : AName.{u} A) :
  subsetB (check (A := A) (finsetPSet (s.sup F))) X =
  i : {x // x in s}, subsetB (check (finsetPSet (F i.1))) X := by
  induction s using Finset.induction with
  | empty =>
    have hsup : ({ } : Finset α).sup F = { } := Finset.sup_empty
    rw [hsup, subsetB_finsetPSet_empty]
    exact (iInf_eq_top.mpr fun i => (Finset.notMem_empty i.1 i.2).elim).symm
  | @insert a s ha ih =>
    have hsup : (insert a s).sup F = F a ∪ s.sup F := Finset.sup_insert
    rw [hsup, subsetB_finsetPSet_union, ih]
    exact (iInf_insert_subtype a s ha
      (fun i => subsetB (check (A := A) (finsetPSet (F i.1))) X)).symm

/-- Finite meets of joins, indexed by a finite subset (via `iInf_iSup_fun`). -/
theorem iInf_iSup_attach {α : Type*} (K : Finset Nat) (f : Nat → α → A) :
  (i : {n // n in K}, bigcup i : α, f i.1 i) =
  bigcup g : ({n // n in K} → α), i : α, f i.1 (g i) := by
  let e := K.orderIsoOfFin rfl
  have hL :
    (i : {n // n in K}, bigcup i : α, f i.1 i) =
    i : Fin K.card, bigcup j : α, f (e i).1 j := by
  refine le_antisymm ?_ ?_
* exact le_iInf fun i => iInf_le _ (e i)
* refine le_iInf fun k => ?_
  simp [Equiv.apply_symm_apply] using
  iInf_le (fun i : Fin K.card => bigcup j : α, f (e i).1 j) (e.symm k)
  rw [hL, iInf_iSup_fun (fun i j => f (e i).1 j)]
  refine le_antisymm ?le ?ge
* refine iSup_le fun G =>
  le_iSup_of_le (fun k => G (e.symm k)) ?_

```

```

    refine le_iInf fun k => ?_
    simp [Equiv.apply_symm_apply] using
      iInf_le (fun i : Fin K.card => f (e i).1 (G i)) (e.symm k)
* refine iSup_le fun F =>
    le_iSup_of_le (fun i => F (e i)) ?_
    exact le_iInf fun i => iInf_le (fun k => f k.1 (F k)) (e i)

theorem memB_check_ofNat_finsetPSet (K : Finset Nat) (n : Nat) :
  memB (check (A := A) (PSet.ofNat n)) (check (finsetPSet K)) =
    if n in K then top else False := by
  rw [finsetPSet, check_mk, memB_mk]
  by_cases hn : n in K
* rw [if_pos hn]
  refine top_unique (le_iSup_of_le <<n, hn>> ?_)
  rw [eqB_self (A := A), top_inf_eq]
* rw [if_neg hn]
  refine le_antisymm ?_ bot_le
  refine iSup_le fun i => ?_
  rcases subsingleton_or_nontrivial A with hA | hA
* exact (Subsingleton.elim (a := A) _ _).le
* have : Nontrivial A := hA
  have hne : n != i.down.val := fun h => hn (h |> i.down.property)
  rw [eqB_check_ofNat_bot (A := A) hne, bot_inf_eq]

theorem subsetB_finsetPSet_omega (K : Finset Nat) :
  subsetB (check (A := A) (finsetPSet K)) (check PSet.omega) = top := by
  rw [subsetB_finsetPSet]
  exact iInf_eq_top.mpr fun _ => memB_check_ofNat_omega _

theorem eqB_finsetToCanonical (K : Finset Nat) :
  eqB (child? (A := A) (finsetToCanonical (A := A) K))
    (check (finsetPSet K)) = top := by
  have hnrm : eqB
    ((powerB (check (A := A) PSet.omega)).child
      (finsetToCanonical (A := A) K).1)
    ((powerB (check (A := A) PSet.omega)).child
      (finsetToPowerIdx (A := A) K)) = top := by
  rw [eqB_comm]
  exact normalizePowerIdx_eqB (check (A := A) PSet.omega)
    (finsetToPowerIdx (A := A) K)
  have hrest : eqB
    ((powerB (check (A := A) PSet.omega)).child
      (finsetToPowerIdx (A := A) K))
    (check (finsetPSet K)) = top := by
  rw [finsetToPowerIdx, restrictPowerIdx_child, eqB_comm]
  exact eqB_restrictName_of_subsetB _ _ (subsetB_finsetPSet_omega K)
  exact eqB_top_trans (A := A) hnrm hrest

theorem memB_finsetToCanonical (K : Finset Nat) (n : Nat) :
  memOfNat (A := A) (finsetToCanonical (A := A) K) n =
    if n in K then top else False := by
  have h := eqB_finsetToCanonical (A := A) K
  unfold memOfNat
  rw [eqB_top_memB_right h, memB_check_ofNat_finsetPSet]

theorem memB_finsetToCanonical_mem {K : Finset Nat} {n : Nat} (h : n in K) :
  memOfNat (A := A) (finsetToCanonical (A := A) K) n = top := by
  rw [memB_finsetToCanonical, if_pos h]

theorem memB_finsetToCanonical_not {K : Finset Nat} {n : Nat} (h : n notin K) :
  memOfNat (A := A) (finsetToCanonical (A := A) K) n = False := by
  rw [memB_finsetToCanonical, if_neg h]

```

```

theorem subsetB_finset_canonical {K : Finset Nat}
  (X : EngelerCarrier (A := A)) :
  subsetB (check (A := A) (finsetPSet K)) (child? X) =
    subsetB (child? (finsetToCanonical (A := A) K)) (child? X) :=
  (eqB_top_subsetB_left (eqB_finsetToCanonical (A := A) K)).symm

theorem subsetB_finset_canonical_of_subset {K L : Finset Nat} (h : K subseq L) :
  subsetB (check (A := A) (finsetPSet K))
    (child? (finsetToCanonical (A := A) L)) = top := by
  have hL : eqB (child? (A := A) (finsetToCanonical (A := A) L))
    (check (finsetPSet L)) = top :=
    eqB_finsetToCanonical (A := A) L
  rw [eqB_top_subsetB_right hL, subsetB_finsetPSet]
  refine iInf_eq_top.mpr fun n => ?_
  have hn : n.1 in L := h n.2
  rw [memB_check_ofNat_finsetPSet, if_pos hn]

/-!
## Membership in `*` and `lam`
-/

theorem memB_ofNat_engelerAppVA
  (F X : EngelerCarrier (A := A)) (n : Nat) :
  memOfNat (A := A) (engelerAppVA (A := A) F X) n =
    bigcup K : Finset Nat,
    subsetB (check (finsetPSet K)) (child? X) sqcap
    memB (pairApplyB (A := A) K n) (child? F) := by
  unfold memOfNat
  have happ : memB (check (PSet.ofNat n)) (child? (engelerAppVA (A := A) F X)) =
    memB (check (PSet.ofNat n))
      (engelerAppName (child? F) (child? X)) :=
    eqB_top_memB_right (engelerAppVA_eqB (A := A) F X)
  rw [happ, memB_engelerAppName, memB_check_ofNat_omega, top_inf_eq]
  unfold engelerAppPred
  refine le_antisymm ?le ?ge
  * refine iSup_le fun K => iSup_le fun m => ?_
    rcases subsingleton_or_nontrivial A with hA | hA
    * exact (Subsingleton.elim (a := A) _ _).le
    * have : Nontrivial A := hA
      cases eq_or_ne n m with
      | inl hnm =>
        subst hnm
        exact le_iSup_of_le K
          (le_inf (inf_le_of_left_le inf_le_right) inf_le_right)
      | inr hne =>
        have hbot : eqB (A := A) (check (PSet.ofNat n)) (check (PSet.ofNat m)) = False :=
          eqB_check_ofNat_bot (A := A) hne
        rw [hbot]
        simp only [bot_inf_eq]
        exact bot_le (a := A)
  * refine iSup_le fun K =>
    le_iSup_of_le K (le_iSup_of_le n ?_)
  rw [eqB_self (A := A) (check (PSet.ofNat n)), top_inf_eq]

theorem memB_ofNat_engelerLamVA
  (f : EngelerCarrier (A := A) -> EngelerCarrier (A := A)) (n : Nat) :
  memOfNat (A := A) (engelerLamVA (A := A) f) n =
    bigcup K : Finset Nat, bigcup m : Nat,
    eqB (check (PSet.ofNat n)) (pairApplyB (A := A) K m) sqcap
    memOfNat (f (finsetToCanonical (A := A) K)) m := by
  unfold memOfNat
  have hlam : memB (check (PSet.ofNat n))
    (child? (engelerLamVA (A := A) f)) =

```



```

    memB (check (PSet.ofNat n)) (engelerLamName (A := A) f) :=
    eqB_top_memB_right (engelerLamVA_eqB (A := A) f)
  rw [hlam, memB_engelerLamName, memB_check_ofNat_omega, top_inf_eq]
  rfl

/-!
## `DeterminedByFiniteVA` calculus
-/

theorem determinedByFiniteVA_mem
  {f : EngelerCarrier (A := A) -> EngelerCarrier (A := A)}
  (hf : DeterminedByFiniteVA (A := A) f)
  (X : EngelerCarrier (A := A)) (n : Nat) :
  memOfNat (f X) n =
    bigcup K : Finset Nat,
    subsetB (check (finsetPSet K)) (child? X) sqcap
    memOfNat (f (finsetToCanonical (A := A) K)) n := by
  unfold memOfNat
  have hfX : memB (check (PSet.ofNat n)) (child? (f X)) =
    memB (check (PSet.ofNat n))
    (sepB (check PSet.omega) (finiteApproxPred (A := A) f (child? X))) :=
    eqB_top_memB_right (hf X)
  rw [hfX, memB_sepB_finiteApprox]

theorem determinedByFiniteVA_of_mem
  (f : EngelerCarrier (A := A) -> EngelerCarrier (A := A))
  (h : forall X : EngelerCarrier (A := A), forall n : Nat,
    memOfNat (f X) n =
      bigcup K : Finset Nat,
      subsetB (check (finsetPSet K)) (child? X) sqcap
      memOfNat (f (finsetToCanonical (A := A) K)) n) :
    DeterminedByFiniteVA (A := A) f := by
  intro X
  let W : EngelerCarrier (A := A) :=
    <restrictPowerIdx
      (sepB (check PSet.omega) (finiteApproxPred (A := A) f (child? X)))
      (check (A := A) PSet.omega),
      restrictPowerIdx_isCanonical _ _>
  have hW : eqB (child? W)
    (sepB (check PSet.omega) (finiteApproxPred (A := A) f (child? X))) = top := by
  unfold child?
  change eqB
    ((powerB (check (A := A) PSet.omega)).child
      (restrictPowerIdx
        (sepB (check PSet.omega) (finiteApproxPred (A := A) f (child? X)))
        (check (A := A) PSet.omega)))
    (sepB (check PSet.omega) (finiteApproxPred (A := A) f (child? X))) = top
  rw [restrictPowerIdx_child, eqB_comm]
  exact eqB_restrictName_of_subsetB _ _ (subsetB_sepB_omega _)
  have hmem : forall n : Nat,
    memB (check (PSet.ofNat n)) (child? (f X)) =
    memB (check (PSet.ofNat n)) (child? W) := by
  intro n
  have hWn : memB (check (PSet.ofNat n)) (child? W) =
    memB (check (PSet.ofNat n))
    (sepB (check PSet.omega) (finiteApproxPred (A := A) f (child? X))) :=
    eqB_top_memB_right hW
  rw [show memB (check (PSet.ofNat n)) (child? (f X)) = memOfNat (f X) n from rfl,
    h X n, hWn, memB_sepB_finiteApprox]
  have hpq : eqB (child? (f X)) (child? W) = top :=
    eqB_canonical_of_memB_ofNat (A := A) hmem
  exact eqB_top_trans (A := A) hpq hW

```

```

theorem determinedByFiniteVA_const (c : EngelerCarrier (A := A)) :
  DeterminedByFiniteVA (A := A) (fun _ => c) := by
  refine determinedByFiniteVA_of_mem (A := A) (fun _ => c) fun X n => ?_
  refine le_antisymm ?le ?ge
  * exact le_iSup_of_le ({}) : Finset Nat)
    (le_inf (by rw [subsetB_finsetPSet_empty]; exact le_top) le_rfl)
  * exact iSup_le fun _ => inf_le_right

theorem determinedByFiniteVA_id :
  DeterminedByFiniteVA (A := A) id := by
  refine determinedByFiniteVA_of_mem (A := A) id fun X n => ?_
  simp only [id]
  refine le_antisymm ?le ?ge
  * refine le_iSup_of_le {n} ?_
    rw [subsetB_finsetPSet_singleton,
        memB_finsetToCanonical_mem (Finset.mem_singleton_self n)]
    exact le_inf le_rfl le_top
  * refine iSup_le fun K => ?_
    by_cases hn : n in K
    * have hle : subsetB (check (A := A) (finsetPSet K)) (child? X) <=
      memOfNat X n := by
      rw [subsetB_finsetPSet]
      exact iInf_le (fun k : {k // k in K} =>
        memB (check (PSet.ofNat k.1)) (child? X)) <n, hn>
      rw [memB_finsetToCanonical_mem (A := A) hn, inf_top_eq]
      exact hle
    * rw [memB_finsetToCanonical_not (A := A) hn, inf_bot_eq]
      exact bot_le

/-- Boolean monotonicity of a determined-by-finite map. -/
theorem determinedByFiniteVA_le
  {f : EngelerCarrier (A := A) -> EngelerCarrier (A := A)}
  (hf : DeterminedByFiniteVA (A := A) f)
  (X Y : EngelerCarrier (A := A)) (n : Nat) :
  subsetB (child? X) (child? Y) sqcap memOfNat (f X) n <= memOfNat (f Y) n := by
  rw [determinedByFiniteVA_mem hf X n, determinedByFiniteVA_mem hf Y n, inf_iSup_eq]
  refine iSup_le fun K => ?_
  refine le_iSup_of_le K ?_
  have hsub : subsetB (child? X) (child? Y) sqcap
    subsetB (check (finsetPSet K)) (child? X) <=
    subsetB (check (finsetPSet K)) (child? Y) := by
    have h := subsetB_trans (check (A := A) (finsetPSet K)) (child? X) (child? Y)
    exact h.trans' (le_inf inf_le_right inf_le_left)
  exact le_inf (hsub.trans' (le_inf inf_le_left (inf_le_of_right_le inf_le_left)))
    (inf_le_of_right_le inf_le_right)

theorem determinedByFiniteVA_le_finset
  {f : EngelerCarrier (A := A) -> EngelerCarrier (A := A)}

Lean 4 source (lines 401–800)

  (hf : DeterminedByFiniteVA (A := A) f)
  (K : Finset Nat) (X : EngelerCarrier (A := A)) (n : Nat) :
  subsetB (check (A := A) (finsetPSet K)) (child? X) sqcap
    memOfNat (f (finsetToCanonical (A := A) K)) n <= memOfNat (f X) n := by
  have hmono := determinedByFiniteVA_le (A := A) hf (finsetToCanonical (A := A) K) X n
  rw [← subsetB_finset_canonical] at hmono
  exact hmono

theorem determinedByFiniteVA_app
  {g h : EngelerCarrier (A := A) -> EngelerCarrier (A := A)}
  (hg : DeterminedByFiniteVA (A := A) g)
  (hh : DeterminedByFiniteVA (A := A) h) :
  DeterminedByFiniteVA (A := A)

```

```

    (fun d => engelerAppVA (A := A) (g d) (h d)) := by
refine determinedByFiniteVA_of_mem (A := A)
    (fun d => engelerAppVA (A := A) (g d) (h d)) fun X n => ?_
rw [memB_ofNat_engelerAppVA]
refine le_antisymm ?le ?ge
* refine iSup_le fun K' => ?_
  have hgX : memB (pairApplyB (A := A) K' n) (child? (g X)) =
    bigcup Kg : Finset Nat,
    subsetB (check (finsetPSet Kg)) (child? X) sqcap
    memB (pairApplyB (A := A) K' n)
    (child? (g (finsetToCanonical (A := A) Kg))) := by
  have := determinedByFiniteVA_mem (A := A) hg X (engelerPair (K', n))
  simpa [memOfNat, pairApplyB] using this
  have hhX : subsetB (check (A := A) (finsetPSet K')) (child? (h X)) =
    ? k : {m // m in K'},
    bigcup Kh : Finset Nat,
    subsetB (check (finsetPSet Kh)) (child? X) sqcap
    memOfNat (h (finsetToCanonical (A := A) Kh)) k.1 := by
  rw [subsetB_finsetPSet]
  refine iInf_congr fun k => ?_
  exact determinedByFiniteVA_mem (A := A) hh X k.1
rw [hhX, iInf_iSup_attach (K := K')]
  (fun k Kh =>
    subsetB (check (A := A) (finsetPSet Kh)) (child? X) sqcap
    memOfNat (h (finsetToCanonical (A := A) Kh)) k),
  hgX, inf_comm, inf_iSup_eq]
refine iSup_le fun F => ?_
rw [inf_comm, inf_iSup_eq]
refine iSup_le fun Kg => ?_
let U : Finset Nat :=
  (Finset.univ : Finset {m // m in K'}).sup F U Kg
have hsplit :
  (? k : {m // m in K'},
    subsetB (check (A := A) (finsetPSet (F k))) (child? X) sqcap
    memOfNat (h (finsetToCanonical (A := A) (F k))) k.1 =
    (? k : {m // m in K'},
      subsetB (check (finsetPSet (F k))) (child? X) sqcap
      ? k : {m // m in K'},
      memOfNat (h (finsetToCanonical (A := A) (F k))) k.1 := by
  refine le_antisymm ?_ ?_
  * exact le_inf
    (le_iInf fun k => (iInf_le _ k).trans inf_le_left)
    (le_iInf fun k => (iInf_le _ k).trans inf_le_right)
  * exact le_iInf fun k =>
    le_inf (inf_le_of_left_le (iInf_le _ k))
    (inf_le_of_right_le (iInf_le _ k))
have hU_sub :
  (? k : {m // m in K'},
    subsetB (check (A := A) (finsetPSet (F k))) (child? X) sqcap
    subsetB (check (finsetPSet Kg)) (child? X) <=
    subsetB (check (finsetPSet U)) (child? X) := by
  rw [subsetB_finsetPSet_union,
    subsetB_finsetPSet_sup
    (s := (Finset.univ : Finset {m // m in K'})) F (child? X)]
  refine le_inf ?_ inf_le_right
  exact le_iInf fun i =>
    inf_le_of_left_le
    (iInf_le (fun k : {m // m in K'} =>
      subsetB (check (A := A) (finsetPSet (F k))) (child? X)) i.1)
have hKgU : Kg subteq U := Finset.subset_union_right
have hFU (k : {m // m in K'}) : F k subteq U :=
  (Finset.le_sup (Finset.mem_univ k)).trans Finset.subset_union_left
have hgU : memB (pairApplyB (A := A) K' n)

```

```

    (child? (g (finsetToCanonical (A := A) Kg))) <=
    memB (pairApplyB (A := A) K' n)
    (child? (g (finsetToCanonical (A := A) U))) := by
have hsub : subsetB
  (child? (finsetToCanonical (A := A) Kg))
  (child? (finsetToCanonical (A := A) U)) = top := by
  rw [ <- subsetB_finset_canonical ]
  exact subsetB_finset_canonical_of_subset hKgU
have := determinedByFiniteVA_le (A := A) hg
  (finsetToCanonical (A := A) Kg) (finsetToCanonical (A := A) U)
  (engelerPair (K', n))
  rw [hsub, top_inf_eq] at this
  simp [memOfNat, pairApplyB] using this
have hhU :
  (? k : {m // m in K'},
    memOfNat (h (finsetToCanonical (A := A) (F k))) k.1) <=
    subsetB (check (A := A) (finsetPSet K'))
    (child? (h (finsetToCanonical (A := A) U))) := by
  rw [subsetB_finsetPSet]
  refine le_iInf fun k => ?_
  have hsub : subsetB
    (child? (finsetToCanonical (A := A) (F k)))
    (child? (finsetToCanonical (A := A) U)) = top := by
    rw [ <- subsetB_finset_canonical ]
    exact subsetB_finset_canonical_of_subset (hFU k)
  have := determinedByFiniteVA_le (A := A) hh
    (finsetToCanonical (A := A) (F k)) (finsetToCanonical (A := A) U) k.1
  rw [hsub, top_inf_eq] at this
  exact this.trans'
    (iInf_le (fun j : {m // m in K'} =>
      memOfNat (h (finsetToCanonical (A := A) (F j))) j.1) k)
  refine le_iSup_of_le U ?_
  rw [memB_ofNat_engelerAppVA, hsplit]
  refine le_inf ?_ (le_iSup_of_le K' ?_)
  * refine hU_sub.trans' (le_inf ?_ ?_)
  * exact inf_le_of_left_le inf_le_left
  * exact inf_le_of_right_le inf_le_left
  * refine le_inf ?_ ?_
  * exact hhU.trans' (inf_le_of_left_le inf_le_right)
  * exact hgU.trans' (inf_le_of_right_le inf_le_right)
* refine iSup_le fun K => ?_
  rw [memB_ofNat_engelerAppVA, inf_iSup_eq]
  refine iSup_le fun K' => ?_
  refine le_iSup_of_le K' ?_
  have hhK : subsetB (check (A := A) (finsetPSet K)) (child? X) sqcap
    subsetB (check (finsetPSet K'))
    (child? (h (finsetToCanonical (A := A) K))) <=
    subsetB (check (finsetPSet K')) (child? (h X)) := by
  rw [subsetB_finsetPSet (K := K'), subsetB_finsetPSet (K := K')]
  refine le_iInf fun k => ?_
  have := determinedByFiniteVA_le_finset (A := A) hh K X k.1
  exact this.trans'
    (le_inf inf_le_left (inf_le_of_right_le
      (iInf_le (fun j : {m // m in K'} =>
        memOfNat (h (finsetToCanonical (A := A) K)) j.1) k)))
  have hgK : subsetB (check (A := A) (finsetPSet K)) (child? X) sqcap
    memB (pairApplyB (A := A) K' n)
    (child? (g (finsetToCanonical (A := A) K))) <=
    memB (pairApplyB (A := A) K' n) (child? (g X)) := by
  have := determinedByFiniteVA_le_finset (A := A) hg K X (engelerPair (K', n))
  simp [memOfNat, pairApplyB] using this
exact le_inf
  (hhK.trans' (le_inf inf_le_left (inf_le_of_right_le inf_le_left)))

```

```

(hgK.trans' (le_inf inf_le_left (inf_le_of_right_le inf_le_right)))

theorem determinedByFiniteVA_lam
  {g : EngelerCarrier (A := A) -> EngelerCarrier (A := A) ->
    EngelerCarrier (A := A)}
  (hg : forall e, DeterminedByFiniteVA (A := A) (fun d => g d e)) :
  DeterminedByFiniteVA (A := A)
    (fun d => engelerLamVA (A := A) (g d)) := by
  refine determinedByFiniteVA_of_mem (A := A)
    (fun d => engelerLamVA (A := A) (g d)) fun X n => ?_
  rw [memB_ofNat_engelerLamVA]
  refine le_antisymm ?le ?ge
  * refine iSup_le fun K' => iSup_le fun m => ?_
    have him : memOfNat (g X (finsetToCanonical (A := A) K')) m =
      bigcup K : Finset Nat,
      subsetB (check (finsetPSet K)) (child? X) sqcap
      memOfNat (g (finsetToCanonical (A := A) K)
        (finsetToCanonical (A := A) K')) m :=
      determinedByFiniteVA_mem (A := A) (hg (finsetToCanonical (A := A) K')) X m
  rw [him, inf_iSup_eq]
  refine iSup_le fun K => le_iSup_of_le K (le_inf ?_ ?_)
  * exact inf_le_of_right_le inf_le_left
  * rw [memB_ofNat_engelerLamVA]
    exact le_iSup_of_le K' (le_iSup_of_le m
      (le_inf inf_le_left (inf_le_of_right_le inf_le_right)))
  * refine iSup_le fun K => ?_
    rw [memB_ofNat_engelerLamVA, inf_iSup_eq]
    refine iSup_le fun K' => ?_
    rw [inf_iSup_eq]
    refine iSup_le fun m => ?_
    refine le_iSup_of_le K' (le_iSup_of_le m (le_inf ?_ ?_))
  * exact inf_le_of_right_le inf_le_left
  * exact (determinedByFiniteVA_le_finset (A := A)
    (hg (finsetToCanonical (A := A) K')) K X m).trans'
    (le_inf inf_le_left (inf_le_of_right_le inf_le_right))

/-!
## Interpretation
-/

variable {Var : Type*} [DecidableEq Var]

/-- Theorem 26, pure-term fragment: `?M?^A_?` on the Theorem 30 carrier. -/
noncomputable def interpVA :
  Lam Var -> Valuation Var (EngelerCarrier (A := A)) ->
  EngelerCarrier (A := A)
  | .var x, ? => ?.toFun x
  | .app M N, ? => engelerAppVA (A := A) (interpVA M ?) (interpVA N ?)
  | .abs x M, ? =>
    engelerLamVA (A := A) fun d => interpVA M (?.update x d)

/-- Closed-term interpretation `?M?^A := ?M?^A_{}`. -/
noncomputable def interpClosedVA (M : Lam Var) : EngelerCarrier (A := A) :=
  interpVA (A := A) M (Valuation.default (finsetToCanonical (A := A) {}))

theorem interpVA_var (x : Var) (? : Valuation Var (EngelerCarrier (A := A)))
  (h : x in ?.domain) :
  interpVA (A := A) (Lam.var x) ? = ?.lookup x h :=
  rfl

theorem interpVA_app (M N : Lam Var)
  (? : Valuation Var (EngelerCarrier (A := A))) :
  interpVA (A := A) (M.app N) ? =

```

```

    engelerAppVA (A := A) (interpVA (A := A) M ?) (interpVA (A := A) N ?) :=
rfl

theorem interpVA_abs (x : Var) (M : Lam Var)
  (? : Valuation Var (EngelerCarrier (A := A))) :
  interpVA (A := A) (Lam.abs x M) ? =
    engelerLamVA (A := A) fun d => interpVA (A := A) M (? .update x d) :=
rfl

theorem interpVA_closed (M : Lam Var) :
  interpClosedVA (A := A) M =
    interpVA (A := A) M
    (Valuation.default (finsetToCanonical (A := A) {})) :=
rfl

/-- Interpretations agree when valuations agree on `fv(M)`. -/
theorem interpVA_agree (M : Lam Var)
  (? sigma : Valuation Var (EngelerCarrier (A := A)))
  (h : forall x in M.fv, ?.toFun x = sigma.toFun x) :
  interpVA (A := A) M ? = interpVA (A := A) M sigma := by
  induction M generalizing ? sigma with
  | var x =>
    have hx : ?.toFun x = sigma.toFun x := h x (by simp [Lam.fv])
    simpa [interpVA] using hx
  | app M N ihM ihN =>
    have hM : forall x in M.fv, ?.toFun x = sigma.toFun x := fun x hx =>
      h x (Finset.mem_union_left N.fv hx)
    have hN : forall x in N.fv, ?.toFun x = sigma.toFun x := fun x hx =>
      h x (Finset.mem_union_right M.fv hx)
    simp only [interpVA]
    rw [ihM ? sigma hM, ihN ? sigma hN]
  | abs x M ih =>
    simp only [interpVA]
    congr 1
    funext d
    refine ih (? .update x d) (sigma.update x d) ?_
    intro y hy
    by_cases hyx : y = x
    * subst hyx
      simp
    * simp [Valuation.update_toFun_of_ne _ _ hyx]
      exact h y (Finset.mem_sdiff.mpr <hy, mt Finset.mem_singleton.mp hyx>)

/-- Updating a variable that is not free does not change the interpretation. -/
theorem interpVA_update_fresh (M : Lam Var)
  (? : Valuation Var (EngelerCarrier (A := A))) (x : Var)
  (d : EngelerCarrier (A := A)) (h : x notin M.fv) :
  interpVA (A := A) M (? .update x d) = interpVA (A := A) M ? := by
  refine interpVA_agree (A := A) M _ _ ?_
  intro y hy
  have hyx : y != x := fun hxy => h (hxy |> hy)
  exact Valuation.update_toFun_of_ne ? d hyx

/-- The meta-lambda `d |-> ?M?^A_{?(x := d)}` is determined by finite sets. -/
theorem interpVA_update_determined (M : Lam Var)
  (? : Valuation Var (EngelerCarrier (A := A))) (x : Var) :
  DeterminedByFiniteVA (A := A)
  (fun d => interpVA (A := A) M (? .update x d)) := by
  induction M generalizing ? x with
  | var y =>
    by_cases hyx : y = x
    * subst hyx
      convert determinedByFiniteVA_id (A := A) using 1

```

```

    funext d
    simp [interpVA]
* convert determinedByFiniteVA_const (A := A) (?toFun y) using 1
    funext d
    simp [interpVA, hyx]
| app M N ihM ihN =>
    simp only [interpVA]
    exact determinedByFiniteVA_app (A := A) (ihM ? x) (ihN ? x)
| abs y M ih =>
    simp only [interpVA]
    by_cases hxy : x = y
* subst hxy
    convert determinedByFiniteVA_const (A := A)
      (engelerLamVA (A := A) fun e => interpVA (A := A) M (?update x e)) using 1
    funext d
    congr 1
    funext e
    simp [Valuation.update_overwrite]
* convert determinedByFiniteVA_lam (A := A)
  (g := fun d e => interpVA (A := A) M ((?update y e).update x d))
  (fun e => ih (?update y e) x) using 1
    funext d
    congr 1
    funext e
    simp [Valuation.update_comm hxy]

/-- Substitution lemma, restricted to `N` free for `x` in `M`. -/
theorem interpVA_subst (M N : Lam Var) (x : Var)
  (? : Valuation Var (EngelerCarrier (A := A)))
  (hfree : M.FreeFor x N) :
  interpVA (A := A) (M.subst x N) ? =
    interpVA (A := A) M (?update x (interpVA (A := A) N ?)) := by
induction M generalizing ? with
| var y =>
    simp only [Lam.subst, Lam.substNaive]
    by_cases hyx : y = x
* subst hyx
    simp [interpVA]
* simp [hyx, interpVA]
| app M_1 M_2 ih_1 ih_2 =>
    obtain <h_1, h_2> := hfree
    simp only [Lam.subst, Lam.substNaive, interpVA]
    rw [ih_1 ? h_1, ih_2 ? h_2]
| abs y M ih =>
    simp only [Lam.subst, Lam.substNaive]
    split_ifs with hyx
* subst hyx
    simp only [interpVA]
    congr 1
    funext d
    rw [Valuation.update_overwrite]
* obtain <hM, hcap> := Lam.freeFor_abs_of_ne hyx hfree
    simp only [interpVA]
    congr 1
    funext d
    cases hcap with
    | inl hyN =>
        have hN : interpVA (A := A) N (?update y d) =
          interpVA (A := A) N ? :=
            interpVA_update_fresh (A := A) N ? y d hyN
        rw [ih (?update y d) hM, hN, Valuation.update_comm hyx]
    | inr hxM =>
        have hsf : M.substNaive x N = M := Lam.subst_fresh N hxM

```

```

rw [hsf]
refine interpVA_agree (A := A) M _ _ ?_
intro z hz
have hzx : z != x := fun hzx => hxM (hzx |> hz)
by_cases hzy : z = y
* subst hzy
  simp
* simp [Valuation.update_toFun_of_ne ? d hzy,
  Valuation.update_toFun_of_ne
    (? .update x (interpVA (A := A) N ?)) d hzy,
  Valuation.update_toFun_of_ne ? (interpVA (A := A) N ?) hzx]

/-- [4, Theorem 5.4.4] b-case on the Theorem 30 carrier, when `N` is free
for `x` in `M`. Uses `theorem_30_retract`. Capturing b is not claimed. -/
theorem interpVA_sound_beta (x : Var) (M N : Lam Var)
  (? : Valuation Var (EngelerCarrier (A := A)))
  (hfree : M.FreeFor x N) :
  interpVA (A := A) ((Lam.abs x M).app N) ? =
  interpVA (A := A) (M.subst x N) ? := by
  have hf : DeterminedByFiniteVA (A := A)
    (fun d => interpVA (A := A) M (? .update x d)) :=
  interpVA_update_determined (A := A) M ? x
  have hretract :=
  engelerVA_retract_oid (A := A)
    (fun d => interpVA (A := A) M (? .update x d)) hf
    (interpVA (A := A) N ?)
  have hstrict : (canonicalPowerSetoid
    (check (A := A) PSet.omega)).IsStrict :=
  canonicalPowerSetoid_isStrict _
  have happ :
  interpVA (A := A) ((Lam.abs x M).app N) ? =
  engelerAppVA (A := A)
    (engelerLamVA (A := A) fun d => interpVA (A := A) M (? .update x d))
    (interpVA (A := A) N ?) :=
  rfl
  have happly :
  engelerAppVA (A := A)
    (engelerLamVA (A := A) fun d => interpVA (A := A) M (? .update x d))
    (interpVA (A := A) N ?) =
  interpVA (A := A) M (? .update x (interpVA (A := A) N ?)) :=
  hstrict _ _ hretract
  exact happ.trans (happly.trans (interpVA_subst (A := A) M N x ? hfree).symm)

/-- Capture-free soundness: `LamEqNC M N` implies `?M?^A_? = ?N?^A_?`. -/
theorem interpVA_sound {M N : Lam Var} (h : LamEqNC M N)
  (? : Valuation Var (EngelerCarrier (A := A))) :
  interpVA (A := A) M ? = interpVA (A := A) N ? := by
  induction h generalizing ? with
  | refl M =>
    rfl
  | symm _ ih =>
    exact (ih ?).symm
  | trans _ _ ih1 ih2 =>
    exact (ih1 ?).trans (ih2 ?)
  | app_left _ ih =>
    simp only [interpVA]
    rw [ih ?]
  | app_right _ ih =>
    simp only [interpVA]
    rw [ih ?]
  | xi x _ ih =>
    simp only [interpVA]
    congr 1

```



```

    funext d
    exact ih (?.update x d)
| beta x M N hfree =>
    exact interpVA_sound_beta (A := A) x M N ? hfree

theorem interpClosedVA_sound {M N : Lam Var} (h : LamEqNC M N) :
  interpClosedVA (A := A) M = interpClosedVA (A := A) N :=
  interpVA_sound (A := A) h
  (Valuation.default (finsetToCanonical (A := A) {}))

```

Lean 4 source (lines 801–985)

```

/-!
## Capture-avoiding substitution and full Theorem 26 soundness
-/

/-- Substitution lemma for capture-avoiding `substCA` on the Theorem 30
carrier. Requires infinitely many names so `pickFresh` is always fresh. -/
theorem interpVA_subst_CA [Infinite Var] (M N : Lam Var) (x : Var)
  (? : Valuation Var (EngelerCarrier (A := A))) :
  interpVA (A := A) (Lam.substCA M x N) ? =
    interpVA (A := A) M (?.update x (interpVA (A := A) N ?)) := by
  induction hsize : M.size using Nat.strong_induction_on generalizing M N x ? with
  | h k ih =>
    match M with
    | .var y =>
      rw [Lam.substCA_var]
      by_cases hyx : y = x
      * subst hyx
        simp [interpVA]
      * simp [hyx, interpVA]
    | .app M_1 M_2 =>
      have h_1 : M_1.size < k := by
        simp [Lam.size] at hsize; omega
      have h_2 : M_2.size < k := by
        simp [Lam.size] at hsize; omega
      simp only [Lam.substCA_app, interpVA]
      rw [ih M_1.size h_1 M_1 N x ? rfl, ih M_2.size h_2 M_2 N x ? rfl]
    | .abs y M =>
      rw [Lam.substCA_abs]
      by_cases hyx : y = x
      * rw [if_pos hyx]
        subst hyx
        simp only [interpVA]
        congr 1
        funext d
        rw [Valuation.update_overwrite]
      * rw [if_neg hyx]
        by_cases hxM : x notin M.fv
        * rw [if_pos hxM]
          simp only [interpVA]
          congr 1
          funext d
          have hcomm :=
            Valuation.update_comm (Ne.symm hyx) ? (interpVA (A := A) N ?) d
          rw [hcomm]
          exact (interpVA_update_fresh (A := A) M (?.update y d) x
            (interpVA (A := A) N ?) hxM).symm
        * rw [if_neg hxM]
          by_cases hyN : y notin N.fv
          * rw [if_pos hyN]
            simp only [interpVA]
            congr 1

```

```

funext d
have hMs : M.size < k := by
  simp [Lam.size] at hsize; omega
rw [ih M.size hMs M N x (?update y d) rfl]
have hN : interpVA (A := A) N (?update y d) =
  interpVA (A := A) N ? :=
  interpVA_update_fresh (A := A) N ? y d hyN
rw [hN, Valuation.update_comm hyx]
* rw [if_neg hyN]
set z := Lam.pickFresh (M.vars U N.fv U {x, y}) y
have hz : z notin M.vars U N.fv U {x, y} :=
  pickFresh_not_mem _ y
have hzM : z notin M.vars := fun h => hz (Finset.mem_union.mpr (Or.inl
  (Finset.mem_union.mpr (Or.inl h))))
have hzN : z notin N.fv := fun h => hz (Finset.mem_union.mpr (Or.inl
  (Finset.mem_union.mpr (Or.inr h))))
have hzx : z != x := fun h => hz (by simp [h])
have hzy : z != y := fun h => hz (by simp [h])
have hMs : M.size < k := by
  simp [Lam.size] at hsize; omega
have hren : (M.substNaive y (Lam.var z)).size = M.size :=
  Lam.size_substNaive_var M y z
simp only [interpVA]
congr 1
funext d
rw [ih M.size hMs (M.substNaive y (Lam.var z)) N x (?update z d)
  hren]
have hN : interpVA (A := A) N (?update z d) =
  interpVA (A := A) N ? :=
  interpVA_update_fresh (A := A) N ? z d hzN
rw [hN, Valuation.update_comm hzx]
have hfree : M.FreeFor y (Lam.var z) :=
  Lam.freeFor_of_not_mem_vars y hzM
have hsub := interpVA_subst (A := A) M (Lam.var z) y
  ((?.update x (interpVA (A := A) N ?)).update z d) hfree
have hzval : interpVA (A := A) (Lam.var z)
  ((?.update x (interpVA (A := A) N ?)).update z d) = d := by
  simp [interpVA]
rw [hsub, hzval]
have hzMf : z notin M.fv := fun h => hzM (Lam.fv_subset_vars M h)
rw [Valuation.update_comm hzy]
exact interpVA_update_fresh (A := A) M
  ((?.update x (interpVA (A := A) N ?)).update y d) z d hzMf

/-- a-soundness: `?fun x. M^A_? = ?fun y. M[x:=y]^A_?` when `y notin fv(M)` -/
theorem interpVA_alpha [Infinite Var] (x y : Var) (M : Lam Var)
  (? : Valuation Var (EngelerCarrier (A := A))) (hy : y notin M.fv) :
  interpVA (A := A) (Lam.abs x M) ? =
  interpVA (A := A) (Lam.abs y (Lam.substCA M x (Lam.var y))) ? := by
  simp only [interpVA]
  congr 1
  funext d
  rw [interpVA_subst_CA (A := A) M (Lam.var y) x (?update y d)]
  simp only [interpVA]
  by_cases hyx : y = x
  * subst hyx
    rw [Valuation.update_toFun_self, Valuation.update_overwrite]
  * rw [Valuation.update_toFun_self, Valuation.update_comm hyx]
    exact (interpVA_update_fresh (A := A) M (?update x d) y d hy).symm

/-- b-case for capture-avoiding substitution on the Theorem 30 carrier.
Uses `theorem_30_retract`. No `FreeFor` hypothesis. -/
theorem interpVA_sound_beta_full [Infinite Var] (x : Var) (M N : Lam Var)

```

```

    (? : Valuation Var (EngelerCarrier (A := A))) :
    interpVA (A := A) ((Lam.abs x M).app N) ? =
      interpVA (A := A) (Lam.substCA M x N) ? := by
have hf : DeterminedByFiniteVA (A := A)
  (fun d => interpVA (A := A) M (?update x d)) :=
  interpVA_update_determined (A := A) M ? x
have hretract :=
  engelerVA_retract_oid (A := A)
  (fun d => interpVA (A := A) M (?update x d)) hf
  (interpVA (A := A) N ?)
have hstrict : (canonicalPowerSetoid
  (check (A := A) PSet.omega)).IsStrict :=
  canonicalPowerSetoid_isStrict _
have happ :
  interpVA (A := A) ((Lam.abs x M).app N) ? =
    engelerAppVA (A := A)
    (engelerLamVA (A := A) fun d => interpVA (A := A) M (?update x d))
    (interpVA (A := A) N ?) :=
  rfl
have happly :
  engelerAppVA (A := A)
    (engelerLamVA (A := A) fun d => interpVA (A := A) M (?update x d))
    (interpVA (A := A) N ?) =
    interpVA (A := A) M (?update x (interpVA (A := A) N ?)) :=
  hstrict _ _ hretract
exact happ.trans (happly.trans (interpVA_subst_CA (A := A) M N x ?).symm)

/-- Full soundness: `LamEq M N` implies `?M?^A_? = ?N?^A_?`.
No `FreeFor` hypothesis. Requires `Infinite Var` so CA renaming is defined. -/
theorem interpVA_sound_full [Infinite Var] {M N : Lam Var} (h : LamEq M N)
  (? : Valuation Var (EngelerCarrier (A := A))) :
  interpVA (A := A) M ? = interpVA (A := A) N ? := by
  induction h generalizing ? with
  | refl M =>
    rfl
  | symm _ ih =>
    exact (ih ?).symm
  | trans _ _ ih1 ih2 =>
    exact (ih1 ?).trans (ih2 ?)
  | app_left _ ih =>
    simp only [interpVA]
    rw [ih ?]
  | app_right _ ih =>
    simp only [interpVA]
    rw [ih ?]
  | xi x _ ih =>
    simp only [interpVA]
    congr 1
    funext d
    exact ih (?update x d)
  | beta x M N =>
    exact interpVA_sound_beta_full (A := A) x M N ?
  | alpha x y M hy =>
    exact interpVA_alpha (A := A) x y M ? hy

theorem interpClosedVA_sound_full [Infinite Var] {M N : Lam Var} (h : LamEq M N) :
  interpClosedVA (A := A) M = interpClosedVA (A := A) N :=
  interpVA_sound_full (A := A) h
  (Valuation.default (finsetToCanonical (A := A) {}))

/-- Theorem 26 soundness sentence on the pure-term / Theorem-30-carrier
fragment (not the full `SetoidF_A` statement). -/
theorem theorem_26_sound_full [Infinite Var] {M N : Lam Var} (h : LamEq M N)

```

```

    (? : Valuation Var (EngelerCarrier (A := A))) :
    interpVA (A := A) M ? = interpVA (A := A) N ? :=
    interpVA_sound_full (A := A) h ?

```

end

end Scott2026

A.25 Scott2026/InterpConstVA.lean

113 lines.

Lean 4 source

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/

import Scott2026.InterpVA
import Scott2026.LambdaConstVA

/-!
# Definition 25 for constant-bearing terms

This extends the existing Engeler-carrier interpretation from pure `Lam` to
the full Definition 20 syntax. Constants are interpreted by a supplied map
into the domain.
-/

universe u

namespace Scott2026

variable {A : Type u} [CompleteBooleanAlgebra A]
{Var Const : Type u} [DecidableEq Var]

/-- Definition 25 on all four constructors, on the Theorem 30 carrier. -/
noncomputable def interpDKVA
  (? : Const -> EngelerCarrier (A := A)) :
  LamDK Var Const -> Valuation Var (EngelerCarrier (A := A)) ->
  EngelerCarrier (A := A)
| .var x, ? => ?.toFun x
| .const d, _ => ? d
| .app M N, ? =>
  engelerAppVA (A := A) (interpDKVA ? M ?) (interpDKVA ? N ?)
| .abs x M, ? =>
  engelerLamVA (A := A) fun d => interpDKVA ? M (?.update x d)

theorem interpDKVA_var (? : Const -> EngelerCarrier (A := A)) (x : Var)
  (? : Valuation Var (EngelerCarrier (A := A))) :
  interpDKVA ? (.var x) ? = ?.toFun x := rfl

theorem interpDKVA_const (? : Const -> EngelerCarrier (A := A)) (d : Const)
  (? : Valuation Var (EngelerCarrier (A := A))) :
  interpDKVA ? (.const d) ? = ? d := rfl

theorem interpDKVA_app (? : Const -> EngelerCarrier (A := A))
  (M N : LamDK Var Const)
  (? : Valuation Var (EngelerCarrier (A := A))) :
  interpDKVA ? (.app M N) ? =
  engelerAppVA (A := A) (interpDKVA ? M ?) (interpDKVA ? N ?) := rfl

```

```

theorem interpDKVA_abs (? : Const -> EngelerCarrier (A := A))
  (x : Var) (M : LamDK Var Const)
  (? : Valuation Var (EngelerCarrier (A := A))) :
  interpDKVA ? (.abs x M) ? =
    engelerLamVA (A := A) fun d => interpDKVA ? M (? .update x d) := rfl

/-- Pure terms retain the existing interpretation. -/
theorem interpDKVA_ofLam (? : Const -> EngelerCarrier (A := A))
  (M : Lam Var) (? : Valuation Var (EngelerCarrier (A := A))) :
  interpDKVA ? (LamDK.ofLam M) ? = interpVA (A := A) M ? := by
  induction M generalizing ? with
  | var x => rfl
  | app M N ihM ihN =>
    simp only [LamDK.ofLam, interpDKVA, interpVA]
    rw [ihM, ihN]
  | abs x M ih =>
    simp only [LamDK.ofLam, interpDKVA, interpVA]
    congr 1
    funext d
    exact ih (? .update x d)

/-- The abstraction meta-map remains determined by finite approximants. -/
theorem interpDKVA_update_determined
  (? : Const -> EngelerCarrier (A := A)) (M : LamDK Var Const)
  (? : Valuation Var (EngelerCarrier (A := A))) (x : Var) :
  DeterminedByFiniteVA (A := A)
    (fun d => interpDKVA ? M (? .update x d)) := by
  induction M generalizing ? x with
  | var y =>
    by_cases hyx : y = x
    * subst hyx
      convert determinedByFiniteVA_id (A := A) using 1
      funext d
      simp [interpDKVA]
    * convert determinedByFiniteVA_const (A := A) (? .toFun y) using 1
      funext d
      simp [interpDKVA, hyx]
  | const c =>
    convert determinedByFiniteVA_const (A := A) (? c) using 1
    funext d
    rfl
  | app M N ihM ihN =>
    simp only [interpDKVA]
    exact determinedByFiniteVA_app (A := A) (ihM ? x) (ihN ? x)
  | abs y M ih =>
    simp only [interpDKVA]
    by_cases hxy : x = y
    * subst hxy
      convert determinedByFiniteVA_const (A := A)
        (engelerLamVA (A := A) fun e => interpDKVA ? M (? .update x e)) using 1
      funext d
      congr 1
      funext e
      simp [Valuation.update_overwrite]
    * convert determinedByFiniteVA_lam (A := A)
      (g := fun d e => interpDKVA ? M ((? .update y e) .update x d))
      (fun e => ih (? .update y e) x) using 1
      funext d
      congr 1
      funext e
      simp [Valuation.update_comm hxy]

```

end Scott2026

A.26 Scott2026/InternalInterp.lean

662 lines.

Lean 4 source (lines 1–400)

```
/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/

import Scott2026.SetCategory

/-!
# Relational infrastructure for internal interpretation

This file develops the dependencies of the Definition 25 recursion. In
particular, an internal inclusion `X` subseteq `Y` induces the relational function
used to interpret constants from `X` as elements of `Y`.
-/

universe u

namespace Scott2026

open AName

variable {A : Type u} [CompleteBooleanAlgebra A]

/-- A partial valuation from `V` to `D`, with domain of definition `Dom`. -/
noncomputable def isValuationB
  (V D Dom Rho : AName.{u} A) : A :=
  subsetB Dom V sqcap isFunctionB Rho Dom D

/-- Boolean non-membership is extensional in its element argument. -/
theorem eqB_inf_compl_memB_le_compl
  (x y S : AName.{u} A) :
  eqB x y sqcap (memB x S)? <= (memB y S)? := by
  rw [le_compl_iff_disjoint_left, disjoint_iff]
  apply le_bot_iff.mp
  have hmem : memB y S sqcap eqB x y <= memB x S := by
    rw [eqB_comm x y]
    exact memB_eqB_left y S x
  calc
    memB y S sqcap (eqB x y sqcap (memB x S)?)
      = (memB x S)? sqcap (memB y S sqcap eqB x y) := by
        ac_rfl
    _ <= (memB x S)? sqcap memB x S := inf_le_inf le_rfl hmem
    _ = False := compl_inf_self _

/-- The identity graph on `X` is also an internal function `X -> Y` whenever
`X` subseteq `Y`. -/
theorem isFunctionB_id_of_subset {X Y : AName.{u} A}
  (hXY : subsetB X Y = top) :
  isFunctionB (idB X) X Y = top := by
  unfold isFunctionB
  refine inf_eq_top_iff.mpr <inf_eq_top_iff.mpr <?_, ?_>, ?_>
  * unfold idB
  rw [subsetB_mk]
  refine iInf_eq_top.mpr fun i => himp_eq_top_iff.mpr ?_
```

```

    rw [memB_opairB_prodB]
    have hmem : memB (X.child i) X <= memB (X.child i) Y := by
      have := memB_of_subsetB (X.child i) X Y
      rwa [hXY, inf_top_eq] at this
    exact le_inf le_rfl hmem
  * exact isFunctionB_single (isFunctionB_id X)
  * exact isFunctionB_total (isFunctionB_id X)

/-- Inclusion of internal sets as a relational function of their `Oid`
setoids. -/
noncomputable def oidSubsetRel
  (X Y : AName.{u} A) (hXY : subsetB X Y = top) :
  RelFun (oid X) (oid Y) :=
  oidRel X Y (idB X) (isFunctionB_id_of_subset hXY)

@[simp] theorem oidSubsetRel_val
  (X Y : AName.{u} A) (hXY : subsetB X Y = top)
  (i : X.idx) (j : Y.idx) :
  (oidSubsetRel X Y hXY).val i j =
  memB (X.child i) X sqcap eqB (X.child i) (Y.child j) := by
  rw [oidSubsetRel, oidRel_val, memB_opairB_idB]

/-- The inclusion matrix already entails the target extent. -/
theorem oidSubsetRel_val_le_target
  (X Y : AName.{u} A) (hXY : subsetB X Y = top)
  (i : X.idx) (j : Y.idx) :
  (oidSubsetRel X Y hXY).val i j <= memB (Y.child j) Y := by
  rw [ <- oid_eps Y j ]
  exact ((oidSubsetRel X Y hXY).le_eps i j).trans inf_le_right

/-- A convenient consequence of an internal inclusion holding at `top`. -/
theorem memB_le_of_subsetB_top {X Y : AName.{u} A}
  (hXY : subsetB X Y = top) (x : AName.{u} A) :
  memB x X <= memB x Y := by
  have h := memB_of_subsetB x X Y
  rwa [hXY, inf_top_eq] at h

/-- On a total `Oid`, its equality matrix has no extent factors. -/
theorem oid_eq_of_total (X : AName.{u} A) (hX : (oid X).IsTotal)
  (i j : X.idx) :
  (oid X).eq i j = eqB (X.child i) (X.child j) := by
  rw [oid_eq, <- oid_eps X i, <- oid_eps X j, hX i, hX j,
  top_inf_eq, top_inf_eq]

/-- Matrix of a partial valuation extended by a fixed default value outside
its domain. Boolean complementation is taken after the extensional lookup
`?x in Dom?`, so the definition is independent of presentations of `x`. -/
noncomputable def totalizedValuationVal
  (V D Dom Rho : AName.{u} A) (default : D.idx)
  (i : V.idx) (j : D.idx) : A :=
  memB (opairB (V.child i) (D.child j)) Rho sqsup
  (memB (V.child i) V sqcap (memB (V.child i) Dom)? sqcap
  (oid D).eq default j)

/-- A partial internal valuation extends to a total relational valuation by
using `default` away from its domain. -/
noncomputable def totalizedValuationRel
  (V D Dom Rho : AName.{u} A)
  (hDom : subsetB Dom V = top)
  (hRho : isFunctionB Rho Dom D = top)
  (hDTotal : (oid D).IsTotal)
  (default : D.idx) :
  RelFun (oid V) (oid D) where

```

```

val := totalizedValuationVal V D Dom Rho default
respects := by
  have key : forall i_1 i_2 j_1 j_2,
    (oid V).eq i_1 i_2 sqcap (oid D).eq j_1 j_2 sqcap
    totalizedValuationVal V D Dom Rho default i_1 j_1 <=
    totalizedValuationVal V D Dom Rho default i_2 j_2 := by
    intro i_1 i_2 j_1 j_2
    unfold totalizedValuationVal
    rw [oid_eq_of_total D hDTotal j_1 j_2,
      oid_eq_of_total D hDTotal default j_1,
      oid_eq_of_total D hDTotal default j_2]
    rw [inf_sup_left]
    refine sup_le ?_ ?_
    * exact le_sup_of_le_left <|
      (memB_opairB_congr Rho (V.child i_1) (V.child i_2)
        (D.child j_1) (D.child j_2)).trans' <| by
        refine le_inf (le_inf ?_ ?_) inf_le_right
        * exact (inf_le_left.trans inf_le_left).trans <| by
          simp only [oid_eq]
          exact inf_le_right
        * exact inf_le_left.trans inf_le_right
    * apply le_sup_of_le_right
      simp only [oid_eq]
      refine le_inf (le_inf
        (inf_le_left.trans
          (inf_le_left.trans (inf_le_left.trans inf_le_right))) ?_ ?_
        * exact (eqB_inf_compl_memB_le_compl
          (V.child i_1) (V.child i_2) Dom).trans' <| by
            exact le_inf
              ((inf_le_left.trans inf_le_left).trans inf_le_right)
              (inf_le_right.trans (inf_le_left.trans inf_le_right))
        * exact (eqB_trans (D.child default) (D.child j_1)
          (D.child j_2)).trans' <| le_inf
              (inf_le_right.trans inf_le_right)
              (inf_le_left.trans inf_le_right)
      intro i_1 i_2 j_1 j_2
      refine le_inf ?_ ?_ <=> rw [le_himp_iff]
      * exact key i_1 i_2 j_1 j_2
      * have h := key i_2 i_1 j_2 j_1
        rwa [(oid V).symm i_2 i_1, (oid D).symm j_2 j_1] at h
le_eps := by
  intro i j
  unfold totalizedValuationVal
  refine sup_le ?_ ?_
  * have hpair := memB_opairB_le_of_subsetB
    (isFunctionB_subset hRho) (V.child i) (D.child j)
    rw [oid_eps, oid_eps]
    exact le_inf
      ((hpair.trans inf_le_left).trans
        (memB_le_of_subsetB_top hDom (V.child i)))
      (hpair.trans inf_le_right)
  * rw [oid_eps]
    exact le_inf (inf_le_of_left_le inf_le_left)
      (inf_le_right.trans ((oid D).eq_le_eps_right default j))
single_valued := by
  intro i j_1 j_2
  let r_1 := memB (opairB (V.child i) (D.child j_1)) Rho
  let r_2 := memB (opairB (V.child i) (D.child j_2)) Rho
  let f_1 := memB (V.child i) V sqcap (memB (V.child i) Dom)? sqcap
    (oid D).eq default j_1
  let f_2 := memB (V.child i) V sqcap (memB (V.child i) Dom)? sqcap
    (oid D).eq default j_2
  have hrr : r_1 sqcap r_2 <= (oid D).eq j_1 j_2 := by

```



```

rw [oid_eq_of_total D hDTotat j_1 j_2]
exact (isSingleValuedB_apply Rho (V.child i)
      (D.child j_1) (D.child j_2)).trans' <| by
  rw [isFunctionB_single hRho, top_inf_eq]
have hrf : r_1 sqcap f_2 <= (oid D).eq j_1 j_2 := by
  have hpair := memB_opairB_le_of_subsetB
    (isFunctionB_subset hRho) (V.child i) (D.child j_1)
  exact (show r_1 sqcap f_2 <= False by
    calc
      r_1 sqcap f_2 <=
        memB (V.child i) Dom sqcap (memB (V.child i) Dom)? :=
          le_inf (inf_le_left.trans (hpair.trans inf_le_left))
            (inf_le_right.trans (inf_le_left.trans inf_le_right))
        _ = False := inf_compl_eq_bot).trans bot_le
have hfr : f_1 sqcap r_2 <= (oid D).eq j_1 j_2 := by
  have hpair := memB_opairB_le_of_subsetB
    (isFunctionB_subset hRho) (V.child i) (D.child j_2)
  exact (show f_1 sqcap r_2 <= False by
    calc
      f_1 sqcap r_2 <=
        (memB (V.child i) Dom)? sqcap memB (V.child i) Dom :=
          le_inf (inf_le_left.trans (inf_le_left.trans inf_le_right))
            (inf_le_right.trans (hpair.trans inf_le_left))
        _ = False := compl_inf_self _).trans bot_le
have hff : f_1 sqcap f_2 <= (oid D).eq j_1 j_2 := by
  refine ((oid D).trans j_1 default j_2).trans' (le_inf ?_ ?_)
* rw [(oid D).symm j_1 default]
  exact inf_le_left.trans inf_le_right
* exact inf_le_right.trans inf_le_right
change (r_1 sqsup f_1) sqcap (r_2 sqsup f_2) <= (oid D).eq j_1 j_2
calc
  (r_1 sqsup f_1) sqcap (r_2 sqsup f_2) =
    (r_1 sqcap (r_2 sqsup f_2)) sqsup (f_1 sqcap (r_2 sqsup f_2)) :=
      inf_sup_right r_1 f_1 (r_2 sqsup f_2)
  - =
    (r_1 sqcap r_2 sqsup r_1 sqcap f_2) sqsup (f_1 sqcap r_2 sqsup f_1 sqcap
    f_2) := by
      exact congrArg_2 (* sqsup *)
        (inf_sup_left r_1 r_2 f_2) (inf_sup_left f_1 r_2 f_2)
  - <= (oid D).eq j_1 j_2 :=
    sup_le (sup_le hrr hrf) (sup_le hfr hff)
total := by
  intro i
  rw [oid_eps]
  let p := memB (V.child i) Dom
  have hsplit : memB (V.child i) V =
    (memB (V.child i) V sqcap p) sqsup
    (memB (V.child i) V sqcap p?) := by
    rw [← inf_sup_left, sup_compl_eq_top, inf_top_eq]
  rw [hsplit]
  refine sup_le ?_ ?_
* have htot := isTotalB_apply Rho Dom (V.child i)
  rw [isFunctionB_total hRho, top_inf_eq] at htot
  refine (inf_le_right.trans htot).trans <|
    iSup_le fun y => ?_
  refine (memB_opairB_le_iSup_child
    (isFunctionB_subset hRho) (V.child i) y).trans <|
    iSup_le fun j => le_iSup_of_le j ?_
  unfold totalizedValuationVal
  exact le_sup_of_le_left le_rfl
* have hdef : (oid D).eps default = top := hDTotat default
  have htot : top <= bigcup j, (oid D).eq default j := by
    rw [← hdef]

```

```

    exact (RelFun.id (oid D)).total default
  have hcoeff : memB (V.child i) V sqcap p? <=
    (memB (V.child i) V sqcap p?) sqcap
    bigcup j, (oid D).eq default j :=
    le_inf le_rfl (le_top.trans htot)
  refine hcoeff.trans ?_
  rw [inf_iSup_eq]
  refine iSup_le fun j => le_iSup_of_le j ?_
  unfold totalizedValuationVal
  exact le_sup_of_le_right (by
    change memB (V.child i) V sqcap p? sqcap (oid D).eq default j <= _
    exact le_rfl)

@[simp] theorem totalizedValuationRel_val
  (V D Dom Rho : AName.{u} A)
  (hDom : subsetB Dom V = top )
  (hRho : isFunctionB Rho Dom D = top )
  (hDTotal : (oid D).IsTotal) (default : D.idx)
  (i : V.idx) (j : D.idx) :
  (totalizedValuationRel V D Dom Rho hDom hRho hDTotal default).val i j =
  totalizedValuationVal V D Dom Rho default i j :=
  rfl

/-- Totalization agrees with the original valuation wherever the latter is
defined. -/
theorem totalizedValuationVal_agrees
  (V D Dom Rho : AName.{u} A) (default : D.idx)
  (i : V.idx) (j : D.idx) :
  memB (V.child i) Dom sqcap
  totalizedValuationVal V D Dom Rho default i j =
  memB (V.child i) Dom sqcap
  memB (opairB (V.child i) (D.child j)) Rho := by
  unfold totalizedValuationVal
  rw [inf_sup_left]
  apply sup_eq_left.mpr
  calc
  memB (V.child i) Dom sqcap
  (memB (V.child i) V sqcap (memB (V.child i) Dom)? sqcap
  (oid D).eq default j)
  <= memB (V.child i) Dom sqcap (memB (V.child i) Dom)? := by
  exact le_inf inf_le_left
  (inf_le_right.trans (inf_le_left.trans inf_le_right))
  _ = False := inf_compl_eq_bot
  _ <= memB (V.child i) Dom sqcap
  memB (opairB (V.child i) (D.child j)) Rho := bot_le

/-- A canonical external representative used only to totalize a partial
valuation. Completeness guarantees that the domain carrier is inhabited. -/
noncomputable def valuationDefault
  (D : AName.{u} A) (hD : (oid D).IsComplete.{u}) : D.idx :=
  Classical.choice (hD.nonempty)

/-- Totalize a valuation directly from its paper-facing validity
hypothesis. -/
noncomputable def totalizedValuationRelOfValid
  (V D Dom Rho : AName.{u} A)
  (hVal : isValuationB V D Dom Rho = top )
  (hDTotal : (oid D).IsTotal)
  (hD : (oid D).IsComplete.{u}) :
  RelFun (oid V) (oid D) := by
  have h := inf_eq_top_iff.mp hVal
  exact totalizedValuationRel V D Dom Rho h.1 h.2 hDTotal
  (valuationDefault D hD)

```

```

section RelationalUpdate

variable {X Y : Type*}
variable {S : ASetoid (A := A) X} {T : ASetoid (A := A) Y}

/-- Equality-complement substitution in an `A`-setoid. -/
theorem setoidEq_inf_compl_le_compl (x_1 x_2 z : X) :
  S.eq x_1 x_2 sqcap (S.eq x_1 z)? <= (S.eq x_2 z)? := by
  rw [le_compl_iff_disjoint_left, disjoint_iff]
  apply le_bot_iff.mp
  have hback : S.eq x_2 z sqcap S.eq x_1 x_2 <= S.eq x_1 z := by
    rw [inf_comm]
    exact S.trans x_1 x_2 z
  calc
    S.eq x_2 z sqcap (S.eq x_1 x_2 sqcap (S.eq x_1 z)?)
      = (S.eq x_1 z)? sqcap (S.eq x_2 z sqcap S.eq x_1 x_2) := by
        ac_rfl
    _ <= (S.eq x_1 z)? sqcap S.eq x_1 z := inf_le_inf le_rfl hback
    _ = False := compl_inf_self _

/-- Boolean matrix for overwriting a relational function at `x` by `d`. -/
def RelFun.updateVal (f : RelFun S T) (x : X) (d : Y)
  (i : X) (j : Y) : A :=
  (S.eq i x sqcap T.eq d j) sqsup ((S.eq i x)? sqcap f.val i j)

/-- Relational environment update. The source and target are total in the
paper's application, so equality and its complement partition every input
with full extent. -/
noncomputable def RelFun.update (f : RelFun S T)
  (hS : S.IsTotal) (hT : T.IsTotal) (x : X) (d : Y) :
  RelFun S T where
  val := f.updateVal x d
  respects := by
    have key : forall i_1 i_2 j_1 j_2,
      S.eq i_1 i_2 sqcap T.eq j_1 j_2 sqcap f.updateVal x d i_1 j_1 <=
        f.updateVal x d i_2 j_2 := by
      intro i_1 i_2 j_1 j_2
      unfold RelFun.updateVal
      rw [inf_sup_left]
      refine sup_le ?_ ?_
      * apply le_sup_of_le_left
      refine le_inf ?_ ?_
      * exact (S.trans i_2 i_1 x).trans' <| le_inf
        ((inf_le_left.trans inf_le_left).trans_eq (S.symm i_1 i_2))
        (inf_le_right.trans inf_le_left)
      * exact (T.trans d j_1 j_2).trans' <| le_inf
        (inf_le_right.trans inf_le_right)
        (inf_le_left.trans inf_le_right)
      * apply le_sup_of_le_right
      refine le_inf ?_ ?_
      * exact (setoidEq_inf_compl_le_compl i_1 i_2 x).trans' <|
        le_inf (inf_le_left.trans inf_le_left)
          (inf_le_right.trans inf_le_left)
      * exact (f.subst_right i_2 j_1 j_2).trans' <| le_inf
        (inf_le_left.trans inf_le_right)
        ((f.subst_left i_1 i_2 j_1).trans' <| le_inf
          (inf_le_left.trans inf_le_left)
          (inf_le_right.trans inf_le_right))
      intro i_1 i_2 j_1 j_2
      refine le_inf ?_ ?_ <| rw [le_himp_iff]
      * exact key i_1 i_2 j_1 j_2
      * have h := key i_2 i_1 j_2 j_1

```

```

      rwa [S.symm i_2 i_1, T.symm j_2 j_1] at h
le_eps := by
  intro i j
  rw [hS i, hT j, top_inf_eq]
  exact le_top
single_valued := by
  intro i j_1 j_2
  let u_1 := S.eq i x sqcap T.eq d j_1
  let u_2 := S.eq i x sqcap T.eq d j_2
  let o_1 := (S.eq i x)? sqcap f.val i j_1
  let o_2 := (S.eq i x)? sqcap f.val i j_2
  have huu : u_1 sqcap u_2 <= T.eq j_1 j_2 := by
    refine (T.trans j_1 d j_2).trans' (le_inf ?_ ?_)
    * rw [T.symm j_1 d]
    exact inf_le_left.trans inf_le_right
    * exact inf_le_right.trans inf_le_right
  have huo : u_1 sqcap o_2 <= T.eq j_1 j_2 := by
    exact (show u_1 sqcap o_2 <= False by
      calc
        u_1 sqcap o_2 <= S.eq i x sqcap (S.eq i x)? :=
          le_inf (inf_le_left.trans inf_le_left)
            (inf_le_right.trans inf_le_left)
        _ = False := inf_compl_eq_bot).trans bot_le
  have hou : o_1 sqcap u_2 <= T.eq j_1 j_2 := by
    exact (show o_1 sqcap u_2 <= False by
      calc
        o_1 sqcap u_2 <= (S.eq i x)? sqcap S.eq i x :=
          le_inf (inf_le_left.trans inf_le_left)
            (inf_le_right.trans inf_le_left)
        _ = False := compl_inf_self _).trans bot_le
  have hoo : o_1 sqcap o_2 <= T.eq j_1 j_2 :=

```

Lean 4 source (lines 401–662)

```

      (f.single_valued i j_1 j_2).trans' <| le_inf
      (inf_le_left.trans inf_le_right)
      (inf_le_right.trans inf_le_right)
change (u_1 sqsup o_1) sqcap (u_2 sqsup o_2) <= T.eq j_1 j_2
calc
  (u_1 sqsup o_1) sqcap (u_2 sqsup o_2) =
    (u_1 sqcap (u_2 sqsup o_2)) sqsup (o_1 sqcap (u_2 sqsup o_2)) :=
      inf_sup_right u_1 o_1 (u_2 sqsup o_2)
  _ = (u_1 sqcap u_2 sqsup u_1 sqcap o_2) sqsup
    (o_1 sqcap u_2 sqsup o_1 sqcap o_2) :=
      congrArg_2 (* sqsup *) (inf_sup_left u_1 u_2 o_2)
    (inf_sup_left o_1 u_2 o_2)
  _ <= T.eq j_1 j_2 :=
    sup_le (sup_le huu huo) (sup_le hou hoo)
total := by
  intro i
  rw [hS i]
  have hsplit : (top : A) = S.eq i x sqsup (S.eq i x)? :=
    (sup_compl_eq_top).symm
  rw [hsplit]
  refine sup_le ?_ ?_
  * have hd : T.eps d = top := hT d
    have htot : top <= bigcup j, T.eq d j := by
      rw [← hd]
      exact (RelFun.id T).total d
    refine (le_inf le_rfl (le_top.trans htot)).trans ?_
    rw [inf_iSup_eq]
    exact iSup_le fun j => le_iSup_of_le j <|
      le_sup_of_le_left le_rfl
  * have htot : top <= bigcup j, f.val i j := by

```

```

    rw [ <- hS i]
    exact f.total i
    refine (le_inf le_rfl (le_top.trans htot)).trans ?_
    rw [inf_iSup_eq]
    exact iSup_le fun j => le_iSup_of_le j <|
    le_sup_of_le_right le_rfl

@[simp] theorem RelFun.update_val (f : RelFun S T)
  (hS : S.IsTotal) (hT : T.IsTotal) (x : X) (d : Y)
  (i : X) (j : Y) :
  (f.update hS hT x d).val i j =
  (S.eq i x sqcap T.eq d j) sqsup ((S.eq i x)? sqcap f.val i j) :=
  rfl

/-- Lookup at the overwritten key. -/
theorem RelFun.update_self (f : RelFun S T)
  (hS : S.IsTotal) (hT : T.IsTotal) (x : X) (d j : Y) :
  (f.update hS hT x d).val x j = T.eq d j := by
  have hxx := hS x
  change S.eq x x = top at hxx
  rw [RelFun.update_val, hxx, top_inf_eq, compl_top, bot_inf_eq,
    sup_bot_eq]

/-- Simultaneous extensional variation of an environment and its replacement
value. The Boolean degree `a` may encode equality of parameters in an
arbitrary indexing setoid. -/
theorem RelFun.updateVal_le_updateVal
  (f g : RelFun S T) (x : X) (d_1 d_2 : Y) (a : A)
  (hfg : forall i j, a sqcap f.val i j <= g.val i j)
  (hd : a <= T.eq d_1 d_2) (i : X) (j : Y) :
  a sqcap f.updateVal x d_1 i j <= g.updateVal x d_2 i j := by
  unfold RelFun.updateVal
  rw [inf_sup_left]
  refine sup_le ?_ ?_
  * apply le_sup_of_le_left
    refine le_inf (inf_le_right.trans inf_le_left) ?_
    refine (T.trans d_2 d_1 j).trans' (le_inf ?_ ?_)
    * exact (inf_le_left.trans hd).trans_eq (T.symm d_1 d_2)
    * exact inf_le_right.trans inf_le_right
  * apply le_sup_of_le_right
    refine le_inf (inf_le_right.trans inf_le_left) ?_
    exact (hfg i j).trans' <| le_inf inf_le_left
    (inf_le_right.trans inf_le_right)

/-- Exact congruence of update under pointwise equality of environments and
setoid equality `top` of replacement values. -/
theorem RelFun.update_congr
  (f g : RelFun S T) (hS : S.IsTotal) (hT : T.IsTotal)
  (x : X) (d_1 d_2 : Y)
  (hfg : forall i j, f.val i j = g.val i j)
  (hd : T.eq d_1 d_2 = top) :
  f.update hS hT x d_1 = g.update hS hT x d_2 := by
  apply RelFun.ext
  intro i j
  apply le_antisymm
  * change f.updateVal x d_1 i j <= g.updateVal x d_2 i j
    simpa only [top_inf_eq] using
      f.updateVal_le_updateVal g x d_1 d_2 top
      (fun i j => by rw [top_inf_eq, hfg i j])
      (by rw [hd]) i j
  * change g.updateVal x d_2 i j <= f.updateVal x d_1 i j
    simpa only [top_inf_eq] using
      g.updateVal_le_updateVal f x d_2 d_1 top

```

```

      (fun i j => by rw [top_inf_eq, hfg i j])
      (by rw [T.symm d_2 d_1, hd]) i j

/-- A family of relational functions varying extensionally pointwise over
an `A`-setoid of parameters. This is the hypothesis needed to run a
valuation-parametric induction: equality of parameters transports every
matrix coefficient of the environment. -/
def RelFun.IsPointwiseFamily {U : Type*}
  (R : ASetoid (A := A) U) (F : U -> RelFun S T) : Prop :=
  forall u v i j, R.eq u v sqcap (F u).val i j <= (F v).val i j

/-- A constant environment is a pointwise relational family. -/
theorem RelFun.isPointwiseFamily_const {U : Type*}
  (R : ASetoid (A := A) U) (f : RelFun S T) :
  RelFun.IsPointwiseFamily R (fun _ => f) := by
  intro u v i j
  exact inf_le_right

/-- Updating a pointwise family by an equality-preserving replacement family
again gives a pointwise family. Both the ambient environment and the
replacement are allowed to vary with the parameter. -/
theorem RelFun.IsPointwiseFamily.update {U : Type*}
  {R : ASetoid (A := A) U} {F : U -> RelFun S T}
  (hF : RelFun.IsPointwiseFamily R F)
  (hS : S.IsTotal) (hT : T.IsTotal) (x : X)
  (d : U -> Y) (hd : APoset.Functional R T d) :
  RelFun.IsPointwiseFamily R
    (fun u => (F u).update hS hT x (d u)) := by
  intro u v i j
  rw [RelFun.update_val, RelFun.update_val]
  exact (RelFun.updateVal_le_updateVal
    (F u) (F v) x (d u) (d v) (R.eq u v)
    (hF u v) (hd u v) i j)

/-- The abstraction family `d |-> ?[x := d]` is pointwise relational over the
codomain setoid itself. -/
theorem RelFun.isPointwiseFamily_update
  (f : RelFun S T) (hS : S.IsTotal) (hT : T.IsTotal) (x : X) :
  RelFun.IsPointwiseFamily T
    (fun d => f.update hS hT x d) :=
  (RelFun.isPointwiseFamily_const T f).update hS hT x _root_.id
  APoset.Functional.id

end RelationalUpdate

/-- An updated relational environment represented as an internal function
name. -/
noncomputable def updateEnvName
  (V D : AName.{u} A) (f : RelFun (oid V) (oid D))
  (hV : (oid V).IsTotal) (hD : (oid D).IsTotal)
  (x : V.idx) (d : D.idx) : AName.{u} A :=
  relFunGraphName V D (f.update hV hD x d)

/-- The graph reconstructed from an updated relational environment is an
internal function. -/
theorem isFunctionB_updateEnvName
  (V D : AName.{u} A) (f : RelFun (oid V) (oid D))
  (hV : (oid V).IsTotal) (hD : (oid D).IsTotal)
  (x : V.idx) (d : D.idx) :
  isFunctionB (updateEnvName V D f hV hD x d) V D = top :=
  isFunctionB_relFunGraphName V D (f.update hV hD x d)

/-!

```

```

## Single extents
-/

/-- One generalized element with prescribed Boolean extent. -/
def extentSetoid (a : A) : ASetoid (A := A) PUnit.{u + 1} where
  eq _ _ := a
  symm _ _ := rfl
  trans _ _ _ := inf_le_left

@[simp] theorem extentSetoid_eq (a : A) (i j : PUnit.{u + 1}) :
  (extentSetoid a).eq i j = a :=
  rfl

@[simp] theorem extentSetoid_eps (a : A) (i : PUnit.{u + 1}) :
  (extentSetoid a).eps i = a :=
  rfl

/-- Restrict a relational function to one source element. -/
def RelFun.at {X Y : Type*}
  {S : ASetoid (A := A) X} {T : ASetoid (A := A) Y}
  (f : RelFun S T) (x : X) :
  RelFun (extentSetoid (S.eps x)) T where
  val _ y := f.val x y
  respects := by
    intro _ y_1 y_2
    refine le_inf ?_ ?_ <;> rw [le_himp_iff]
    * exact (f.subst_right x y_1 y_2).trans' <|
      le_inf (inf_le_left.trans inf_le_right) inf_le_right
    * have h := f.subst_right x y_2 y_1
      rw [T.symm y_2 y_1, inf_comm] at h
      exact h.trans' <| le_inf inf_le_right
        (inf_le_left.trans inf_le_right)
  le_eps := fun _ y => f.le_eps x y
  single_valued := fun _ => f.single_valued x
  total := fun _ => f.total x

@[simp] theorem RelFun.at_val {X Y : Type*}
  {S : ASetoid (A := A) X} {T : ASetoid (A := A) Y}
  (f : RelFun S T) (x : X) (i : PUnit.{u + 1}) (y : Y) :
  (f.at x).val i y = f.val x y :=
  rfl

section Product

variable {X_1 X_2 Y_1 Y_2 : Type*}
variable {S_1 : ASetoid (A := A) X_1} {S_2 : ASetoid (A := A) X_2}
variable {T_1 : ASetoid (A := A) Y_1} {T_2 : ASetoid (A := A) Y_2}

/-- Product of relational functions. -/
def RelFun.prod (f : RelFun S_1 T_1) (g : RelFun S_2 T_2) :
  RelFun (S_1.prod S_2) (T_1.prod T_2) where
  val x y := f.val x.1 y.1 sqcap g.val x.2 y.2
  respects := by
    have key : forall x_1 x_2 y_1 y_2,
      (S_1.prod S_2).eq x_1 x_2 sqcap (T_1.prod T_2).eq y_1 y_2 sqcap
        (f.val x_1.1 y_1.1 sqcap g.val x_1.2 y_1.2) <=
          f.val x_2.1 y_2.1 sqcap g.val x_2.2 y_2.2 := by
      intro x_1 x_2 y_1 y_2
      refine le_inf ?_ ?_
      * exact (f.subst_right x_2.1 y_1.1 y_2.1).trans' <| le_inf
        (inf_le_left.trans (inf_le_right.trans inf_le_left))
        ((f.subst_left x_1.1 x_2.1 y_1.1).trans' <| le_inf
          (inf_le_left.trans (inf_le_left.trans inf_le_left)))

```

```

      (inf_le_right.trans inf_le_left))
    * exact (g.subst_right x_2.2 y_1.2 y_2.2).trans' <| le_inf
      (inf_le_left.trans (inf_le_right.trans inf_le_right))
      ((g.subst_left x_1.2 x_2.2 y_1.2).trans' <| le_inf
        (inf_le_left.trans (inf_le_left.trans inf_le_right))
        (inf_le_right.trans inf_le_right))
  intro x_1 x_2 y_1 y_2
  refine le_inf ?_ ?_ <| rw [le_himp_iff]
  * exact key x_1 x_2 y_1 y_2
  * have h := key x_2 x_1 y_2 y_1
    rwa [(S_1.prod S_2).symm x_2 x_1, (T_1.prod T_2).symm y_2 y_1] at h
le_eps := by
  intro x y
  change f.val x.1 y.1 sqcap g.val x.2 y.2 <=
    (S_1.eps x.1 sqcap S_2.eps x.2) sqcap (T_1.eps y.1 sqcap T_2.eps y.2)
  refine le_inf (le_inf ?_ ?_) (le_inf ?_ ?_)
  * exact inf_le_left.trans ((f.le_eps x.1 y.1).trans inf_le_left)
  * exact inf_le_right.trans ((g.le_eps x.2 y.2).trans inf_le_left)
  * exact inf_le_left.trans ((f.le_eps x.1 y.1).trans inf_le_right)
  * exact inf_le_right.trans ((g.le_eps x.2 y.2).trans inf_le_right)
single_valued := by
  intro x y_1 y_2
  rw [ASetoid.prod_eq]
  exact inf_pair_le (f.single_valued x.1 y_1.1 y_2.1)
    (g.single_valued x.2 y_1.2 y_2.2)
total := by
  intro x
  change S_1.eps x.1 sqcap S_2.eps x.2 <=
    bigcup y : Y_1 x Y_2, f.val x.1 y.1 sqcap g.val x.2 y.2
  refine (inf_le_inf (f.total x.1) (g.total x.2)).trans ?_
  rw [iSup_inf_eq]
  refine iSup_le fun y_1 => ?_
  rw [inf_iSup_eq]
  refine iSup_le fun y_2 => le_iSup_of_le (y_1, y_2) le_rfl

@[simp] theorem RelFun.prod_val (f : RelFun S_1 T_1) (g : RelFun S_2 T_2)
  (x : X_1 x X_2) (y : Y_1 x Y_2) :
  (f.prod g).val x y = f.val x.1 y.1 sqcap g.val x.2 y.2 :=
  rfl

end Product

end Scott2026

```

A.27 Scott2026/InternalEval.lean

1646 lines.

Lean 4 source (lines 1–400)

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/

import Scott2026.InternalInterp
import Scott2026.LambdaConstVA
import Scott2026.ReflexiveVA

/-!
# Internal Definition 25 evaluation

```


This file develops the valuation-parametric recursion omitted from the paper's proof of Theorem 26.

-/

universe u

namespace Scott2026

open AName

variable {A : Type u} [CompleteBooleanAlgebra A]

/-- The internal reflexive-dcpo data and the external setoid hypotheses of Theorem 26. -/

structure InternalReflexiveModel where

D : AName.{u} A

R : AName.{u} A

C : AName.{u} A

Q : AName.{u} A

Fun : AName.{u} A

Lam : AName.{u} A

valid : isReflexiveDcpoB D R C Q Fun Lam = top

strict : (oid D).IsStrict

total : (oid D).IsTotal

complete : (oid D).IsComplete.{u}

namespace InternalReflexiveModel

variable (M : InternalReflexiveModel (A := A))

/-- The six clauses packed by internal Definition 19. -/

theorem valid_components :

isDcpoWithBottomB M.D M.R = top /\
 isContinuousMapSpaceB M.C M.D M.R = top /\
 isPointwiseOrderB M.Q M.C M.D M.R = top /\
 isScottContinuousB M.Fun M.D M.C M.R M.Q = top /\
 isScottContinuousB M.Lam M.C M.D M.Q M.R = top /\
 eqB (compB M.Fun M.Lam M.C M.C) (idB M.C) = top := by

have hv := M.valid

unfold isReflexiveDcpoB at hv

have h? := inf_eq_top_iff.mp hv

have h? := inf_eq_top_iff.mp h?.1

have h_3 := inf_eq_top_iff.mp h?.1

have h_2 := inf_eq_top_iff.mp h_3.1

have h_1 := inf_eq_top_iff.mp h_2.1

exact <h_1.1, h_1.2, h_2.2, h_3.2, h?.2, h?.2>

theorem dcpo_valid : isDcpoWithBottomB M.D M.R = top :=
 M.valid_components.1

theorem mapSpace_valid : isContinuousMapSpaceB M.C M.D M.R = top :=
 M.valid_components.2.1

theorem pointwise_valid : isPointwiseOrderB M.Q M.C M.D M.R = top :=
 M.valid_components.2.2.1

theorem fun_continuous :
 isScottContinuousB M.Fun M.D M.C M.R M.Q = top :=
 M.valid_components.2.2.2.1

theorem lam_continuous :
 isScottContinuousB M.Lam M.C M.D M.Q M.R = top :=
 M.valid_components.2.2.2.2.1

```

theorem retract_valid :
  eqB (compB M.Fun M.Lam M.C M.C) (idB M.C) = top :=
  M.valid_components.2.2.2.2.2

/-- Scott continuity includes being an internal function. -/
theorem function_of_scottContinuous {F X Y P Q : AName.{u} A}
  (h : isScottContinuousB F X Y P Q = top) :
  isFunctionB F X Y = top := by
  unfold isScottContinuousB at h
  exact (inf_eq_top_iff.mp (inf_eq_top_iff.mp h).1).1

theorem fun_function : isFunctionB M.Fun M.D M.C = top :=
  function_of_scottContinuous M.fun_continuous

theorem lam_function : isFunctionB M.Lam M.C M.D = top :=
  function_of_scottContinuous M.lam_continuous

/-- The reverse half of `C` consists exactly of the Scott-continuous
self-maps of `D`.? -/
theorem mem_mapSpace_of_scottContinuous (F : AName.{u} A)
  (hF : isScottContinuousB F M.D M.D M.R M.R = top) :
  memB F M.C = top := by
  have hparts := inf_eq_top_iff.mp M.mapSpace_valid
  have hall : (? G : AName.{u} A,
    (memB G M.C ? isScottContinuousB G M.D M.D M.R M.R) sqcap
    (isScottContinuousB G M.D M.D M.R M.R ? memB G M.C)) = top :=
    hparts.2
  have hG := iInf_eq_top.mp hall F
  have himp :
    isScottContinuousB F M.D M.D M.R M.R ? memB F M.C = top :=
    (inf_eq_top_iff.mp hG).2
  apply top_unique
  exact (himp_eq_top_iff.mp himp).trans' (by rw [hF])

end InternalReflexiveModel

/-!
## The recursive Boolean matrix
-/

/-- Definition 25 as a Boolean relational matrix. The environment is already
total. In the abstraction case the recursive calls form the graph of the
meta-function `d |-> ?M??[x:=d]`, which is then passed to the internal `Lam`
graph. -/
noncomputable def interpDKRelVal
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top)
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?.D)) :
  LamDK V.idx K.idx -> ?.D.idx -> A
| .var x, d => ?.val x d
| .const k, d => (oidSubsetRel K ?.D hK).val k d
| .app P Q, d =>
  bigcup c : ?.C.idx, bigcup q' : ?.D.idx, bigcup p : ?.D.idx,
  bigcup q : ?.D.idx,
  interpDKRelVal ? V K hK hV ? P p sqcap
  interpDKRelVal ? V K hK hV ? Q q sqcap
  memB (opairB (?.D.child p) (?.C.child c)) ?.Fun sqcap
  (oid ?.D).eq q q' sqcap
  memB (?.C.child c) ?.C sqcap
  memB (opairB (?.D.child q') (?.D.child d))
  (?.C.child c)

```

```

| .abs x P, d =>
  (memB (V.child x) V sqcap lamDKVal V K P) sqcap
  memB
  (opairB
    (mk (?D.idx x ?D.idx)
      (fun p => opairB (?D.child p.1) (?D.child p.2))
      (fun p => interpDKRelVal ? V K hK hV
        (?update hV ?total x p.1) P p.2))
      (?D.child d))
    ?Lam
termination_by M => sizeOf M

@[simp] theorem interpDKRelVal_var
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?D = top )
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?D)) (x : V.idx) (d : ?D.idx) :
  interpDKRelVal ? V K hK hV ? (.var x) d = ?val x d :=
  by rw [interpDKRelVal]

@[simp] theorem interpDKRelVal_const
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?D = top )
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?D)) (k : K.idx) (d : ?D.idx) :
  interpDKRelVal ? V K hK hV ? (.const k) d =
  (oidSubsetRel K ?D hK).val k d :=
  by rw [interpDKRelVal]

@[simp] theorem interpDKRelVal_app
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?D = top )
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?D))
  (P Q : LamDK V.idx K.idx) (d : ?D.idx) :
  interpDKRelVal ? V K hK hV ? (.app P Q) d =
  bigcup c : ?C.idx, bigcup q' : ?D.idx, bigcup p : ?D.idx,
  bigcup q : ?D.idx,
  interpDKRelVal ? V K hK hV ? P p sqcap
  interpDKRelVal ? V K hK hV ? Q q sqcap
  memB (opairB (?D.child p) (?C.child c)) ?Fun sqcap
  (oid ?D).eq q q' sqcap
  memB (?C.child c) ?C sqcap
  memB (opairB (?D.child q') (?D.child d))
  (?C.child c) :=
  by rw [interpDKRelVal]

/-- The internal graph of the meta-function in the abstraction clause. -/
noncomputable def interpDKBodyGraph
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?D = top )
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?D))
  (x : V.idx) (P : LamDK V.idx K.idx) : AName.{u} A :=
  mk (?D.idx x ?D.idx)
  (fun p => opairB (?D.child p.1) (?D.child p.2))
  (fun p => interpDKRelVal ? V K hK hV
    (?update hV ?total x p.1) P p.2)

@[simp] theorem interpDKRelVal_abs
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?D = top )
  (hV : (oid V).IsTotal)

```

```

    (? : RelFun (oid V) (oid ?.D))
    (x : V.idx) (P : LamDK V.idx K.idx) (d : ?.D.idx) :
    interpDKRelVal ? V K hK hV ? (.abs x P) d =
      lamDKVal V K (.abs x P) sqcap
      memB (opairB (interpDKBodyGraph ? V K hK hV ? x P)
        (?.D.child d)) ?.Lam :=
  by rw [interpDKRelVal, interpDKBodyGraph, lamDKVal]

/-- A Boolean row representing one element of `D` at extent `a`. -/
def IsRelElementAt (D : AName.{u} A) (a : A) (r : D.idx → A) : Prop :=
  (forall d e, (oid D).eq d e sqcap r d <= r e) /\
  (forall d, r d <= a sqcap (oid D).eps d) /\
  (forall d e, r d sqcap r e <= (oid D).eq d e) /\
  (a <= bigcup d, r d)

/-- `IsRelElementAt` is exactly a relational function out of the singleton
setoid with extent `a`. -/
noncomputable def relFunOfIsRelElementAt
  {D : AName.{u} A} {a : A} {r : D.idx → A}
  (h : IsRelElementAt D a r) :
  RelFun (extentSetoid a) (oid D) where
  val _ d := r d
  respects := by
    intro _ _ d e
    refine le_inf ?_ ?_ <;> rw [le_himp_iff]
    * exact h.1 d e |>.trans' <|
      le_inf (inf_le_left.trans inf_le_right) inf_le_right
    * have hde := h.1 e d
      rw [(oid D).symm e d] at hde
      exact hde.trans' <|
        le_inf (inf_le_left.trans inf_le_right) inf_le_right
  le_eps := fun _ d => h.2.1 d
  single_valued := fun _ d e => h.2.2.1 d e
  total := fun _ => h.2.2.2

@[simp] theorem relFunOfIsRelElementAt_val
  {D : AName.{u} A} {a : A} {r : D.idx → A}
  (h : IsRelElementAt D a r) (i : PUnit) (d : D.idx) :
  (relFunOfIsRelElementAt h).val i d = r d :=
  rfl

/-- Every relational map from a singleton extent is a generalized
element at that extent. -/
theorem isRelElementAt_of_relFun
  {D : AName.{u} A} {a : A}
  (f : RelFun (extentSetoid a) (oid D)) :
  IsRelElementAt D a (fun d => f.val PUnit.unit d) := by
  refine <?_, ?_, ?_, ?_>
  * intro d e
    exact f.subst_right PUnit.unit d e
  * intro d
    exact f.le_eps PUnit.unit d
  * intro d e
    exact f.single_valued PUnit.unit d e
  * exact f.total PUnit.unit

/-- Variable case of the extent-indexed fundamental relation lemma. -/
theorem interpDKRelVal_var_isRelElementAt
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top)
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?.D)) (x : V.idx) :
  IsRelElementAt ?.D (lamDKVal V K (.var x))

```

```

      (interpDKRelVal ? V K hK hV ? (.var x)) := by
have h := isRelElementAt_of_relFun (? .at x)
change IsRelElementAt ? .D (memB (V.child x) V) _
have heval :
  interpDKRelVal ? V K hK hV ? (.var x) =
    fun d => ? .val x d := by
  funext d
  rw [interpDKRelVal_var]
rw [heval]
simp only [oid_eps, RelFun.at_val] using h

/-- Constant case of the extent-indexed fundamental relation lemma. -/
theorem interpDKRelVal_const_isRelElementAt
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ? .D = top )
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ? .D)) (k : K.idx) :
  IsRelElementAt ? .D (lamDKVal V K (.const k))
  (interpDKRelVal ? V K hK hV ? (.const k)) := by
have h := isRelElementAt_of_relFun ((oidSubsetRel K ? .D hK).at k)
change IsRelElementAt ? .D (memB (K.child k) K) _
have heval :
  interpDKRelVal ? V K hK hV ? (.const k) =
    fun d => (oidSubsetRel K ? .D hK).val k d := by
  funext d
  rw [interpDKRelVal_const]
rw [heval]
simp only [oid_eps, RelFun.at_val] using h

/-!
## Internal evaluation of continuous maps
-/

/-- Membership in the internal continuous-map space entails Scott continuity
at the same Boolean degree. -/
theorem InternalReflexiveModel.mem_mapSpace_le_scottContinuous
  (? : InternalReflexiveModel (A := A)) (F : AName.{u} A) :
  memB F ? .C <= isScottContinuousB F ? .D ? .D ? .R ? .R := by
have hall := (inf_eq_top_iff.mp ? .mapSpace_valid).2
have hF := iInf_eq_top.mp hall F
exact himp_eq_top_iff.mp (inf_eq_top_iff.mp hF).1

/-- Scott continuity entails membership in the exact internal map space at
the same Boolean degree. -/
theorem InternalReflexiveModel.scottContinuous_le_mem_mapSpace
  (? : InternalReflexiveModel (A := A)) (F : AName.{u} A) :
  isScottContinuousB F ? .D ? .D ? .R ? .R <= memB F ? .C := by
have hall := (inf_eq_top_iff.mp ? .mapSpace_valid).2
have hF := iInf_eq_top.mp hall F
exact himp_eq_top_iff.mp (inf_eq_top_iff.mp hF).2

/-- Equality at a Boolean degree transports membership at that degree. -/
theorem inf_eqB_memB_le_memB
  (a : A) (F G C : AName.{u} A) :
  a sqcap eqB F G sqcap memB G C <= memB F C := by
rw [eqB_comm F G]
exact (memB_eqB_left G C F).trans' <| by
  exact le_inf inf_le_right
  (inf_le_left.trans inf_le_right)

/-- Two complementary local proofs cover the full Boolean truth value. -/
theorem eq_top_of_degree_compl_le {a p : A}
  (ha : a <= p) (hac : a? <= p) : p = top := by

```

```

    apply top_unique
    rw [ <- sup_compl_eq_top]
    exact sup_le ha hac

/-- Scott continuity can be glued from complementary Boolean pieces by first
gluing membership in the exact internal continuous-map space. -/
theorem InternalReflexiveModel.scottContinuous_of_mapSpace_cover
  (? : InternalReflexiveModel (A := A)) (F : AName.{u} A) (a : A)
  (ha : a <= memB F ?.C) (hac : a? <= memB F ?.C) :
  isScottContinuousB F ?.D ?.D ?.R ?.R = top := by
  have hmem : memB F ?.C = top :=
    eq_top_of_degree_compl_le ha hac
  apply top_unique
  exact (?.mem_mapSpace_le_scottContinuous F).trans' <| by rw [hmem]

/-- Internal relations respect Boolean equality in both arguments. -/
theorem relB_congr (R x x' y y' : AName.{u} A) :
  eqB x x' sqcap eqB y y' sqcap relB R x y <= relB R x' y' := by
  unfold relB
  exact memB_opairB_congr R x x' y y'

/-- Reflexivity of the internal dcpo order, localized at membership in `D`. -/
theorem InternalReflexiveModel.mem_le_rel_self
  (? : InternalReflexiveModel (A := A)) (x : AName.{u} A) :
  memB x ?.D <= relB ?.R x x := by
  have hdc := ?.dcpo_valid
  unfold isDcpoWithBottomB at hdc
  have hpo := (inf_eq_top_iff.mp (inf_eq_top_iff.mp hdc).1).1
  unfold isPartialOrderB at hpo
  have hrefl :=
    (inf_eq_top_iff.mp
      (inf_eq_top_iff.mp
        (inf_eq_top_iff.mp hpo).1).1).2
  exact himp_eq_top_iff.mp (iInf_eq_top.mp hrefl x)

/-- Transitivity of the internally valid order on `D`. -/
theorem InternalReflexiveModel.relR_trans
  (? : InternalReflexiveModel (A := A))
  (x y z : AName.{u} A) :
  relB ?.R x y sqcap relB ?.R y z <= relB ?.R x z := by
  have hdc := ?.dcpo_valid
  unfold isDcpoWithBottomB at hdc
  have hpo := (inf_eq_top_iff.mp (inf_eq_top_iff.mp hdc).1).1
  unfold isPartialOrderB at hpo
  have htrans := (inf_eq_top_iff.mp hpo).2
  have hx := iInf_eq_top.mp htrans x
  have hy := iInf_eq_top.mp hx y
  have hz := iInf_eq_top.mp hy z
  exact himp_eq_top_iff.mp hz

/-- A function whose outputs are all equal at degree `a` is Scott-continuous
at that degree. The directed-supremum argument uses nonemptiness to select an
input at which the alleged upper bound can be tested. -/
theorem InternalReflexiveModel.constantMap_le_scottContinuous
  (? : InternalReflexiveModel (A := A))
  (F : AName.{u} A) (a : A)
  (hfun : a <= isFunctionB F ?.D ?.D)
  (hconst : forall x x' y y' : AName.{u} A,
    a sqcap memB (opairB x y) F sqcap memB (opairB x' y') F <= eqB y y') :
  a <= isScottContinuousB F ?.D ?.D ?.R ?.R := by
  have hout (x y : AName.{u} A) :
    a sqcap memB (opairB x y) F <= memB y ?.D := by
    have hsub : a <= subsetB F (prodB ?.D ?.D) :=

```

```

    hfun.trans (inf_le_left.trans inf_le_left)
have hm := (memB_of_subsetB (opairB x y) F
  (prodB ?.D ?.D)).trans' <|
  le_inf inf_le_right (inf_le_left.trans hsub)
rw [memB_opairB_prodB] at hm
exact hm.trans inf_le_right
unfold isScottContinuousB
refine le_inf (le_inf hfun ?_) ?_
* refine le_iInf fun x => le_iInf fun x' =>

```

Lean 4 source (lines 401–800)

```

    le_iInf fun y => le_iInf fun y' => ?_
rw [le_himp_iff]
let t := a sqcap
  (memB (opairB x y) F sqcap memB (opairB x' y') F sqcap
    relB ?.R x x')
change t <= relB ?.R y y'
have htA : t <= a := by dsimp [t]; exact inf_le_left
have htFxy : t <= memB (opairB x y) F := by
  dsimp [t]
  exact inf_le_right.trans (inf_le_left.trans inf_le_left)
have htFx'y' : t <= memB (opairB x' y') F := by
  dsimp [t]
  exact inf_le_right.trans (inf_le_left.trans inf_le_right)
have hyy' : t <= eqB y y' :=
  (hconst x x' y y').trans' <| le_inf
  (le_inf htA htFxy) htFx'y'
have hyD : t <= memB y ?.D :=
  (hout x y).trans' (le_inf htA htFxy)
exact (relB_congr ?.R y y y y').trans' <| le_inf
  (le_inf (le_top.trans (eqB_self (A := A) y).ge) hyy')
  (hyD.trans (?.mem_le_rel_self y))
* refine le_iInf fun S => le_iInf fun x => le_iInf fun y => ?_
rw [le_himp_iff]
unfold mapsToSupB
refine le_inf ?_ ?_
* refine le_iInf fun w => le_iInf fun z => ?_
rw [le_himp_iff]
let t := (a sqcap
  (isDirectedRelB S ?.D ?.R sqcap isSupRelB x S ?.R sqcap
    memB (opairB x y) F)) sqcap
  (memB w S sqcap memB (opairB w z) F)
change t <= relB ?.R z y
have htA : t <= a := by
  dsimp [t]
  exact inf_le_left.trans inf_le_left
have htFxy : t <= memB (opairB x y) F := by
  dsimp [t]
  exact inf_le_left.trans (inf_le_right.trans inf_le_right)
have htFwz : t <= memB (opairB w z) F := by
  dsimp [t]
  exact inf_le_right.trans inf_le_right
have hzy : t <= eqB z y :=
  (hconst w x z y).trans' <| le_inf
  (le_inf htA htFwz) htFxy
have hzD : t <= memB z ?.D :=
  (hout w z).trans' (le_inf htA htFwz)
exact (relB_congr ?.R z z z y).trans' <| le_inf
  (le_inf (le_top.trans (eqB_self (A := A) z).ge) hzy)
  (hzD.trans (?.mem_le_rel_self z))
* refine le_iInf fun u => ?_
rw [le_himp_iff]
let upper :=

```

```

? w : AName A, ? z : AName A,
  memB w S sqcap memB (opairB w z) F ? relB ? .R z u
let t := (a sqcap
  (isDirectedRelB S ? .D ? .R sqcap isSupRelB x S ? .R sqcap
    memB (opairB x y) F)) sqcap upper
change t <= relB ? .R y u
have htA : t <= a := by
  dsimp [t]
  exact inf_le_left.trans inf_le_left
have htDir : t <= isDirectedRelB S ? .D ? .R := by
  dsimp [t]
  exact inf_le_left.trans (inf_le_right.trans
    (inf_le_left.trans inf_le_left))
have htFxy : t <= memB (opairB x y) F := by
  dsimp [t]
  exact inf_le_left.trans (inf_le_right.trans inf_le_right)
have htUpper : t <= upper := by
  dsimp [t]
  exact inf_le_right
have hnonempty :
  isDirectedRelB S ? .D ? .R <=
    bigcup w : AName A, memB w S := by
  unfold isDirectedRelB
  exact inf_le_left.trans inf_le_right
refine (le_inf le_rfl (htDir.trans hnonempty)).trans ?_
rw [inf_iSup_eq]
refine iSup_le fun w => ?_
let tw := t sqcap memB w S
change tw <= relB ? .R y u
have htWt : tw <= t := by dsimp [tw]; exact inf_le_left
have htWmem : tw <= memB w S := by dsimp [tw]; exact inf_le_right
have hsub :
  isDirectedRelB S ? .D ? .R <= subsetB S ? .D := by
  unfold isDirectedRelB
  exact inf_le_left.trans inf_le_left
have hwD : tw <= memB w ? .D := by
  exact (memB_of_subsetB w S ? .D).trans' <| le_inf
  htWmem (htWt.trans htDir |>.trans hsub)
have httotal :
  isFunctionB F ? .D ? .D sqcap memB w ? .D <=
    bigcup z : AName A, memB (opairB w z) F :=
  (isTotalB_apply F ? .D w).trans' <| le_inf
  (inf_le_left.trans inf_le_right) inf_le_right
have hex : tw <= bigcup z : AName A, memB (opairB w z) F :=
  httotal.trans' <| le_inf
  (htWt.trans htA |>.trans hfun) hwD
refine (le_inf le_rfl hex).trans ?_
rw [inf_iSup_eq]
refine iSup_le fun z => ?_
let twz := tw sqcap memB (opairB w z) F
change twz <= relB ? .R y u
have htWzT : twz <= t := by
  dsimp [twz, tw]
  exact inf_le_left.trans inf_le_left
have htWzMemW : twz <= memB w S := by
  dsimp [twz, tw]
  exact inf_le_left.trans inf_le_right
have htWzFwz : twz <= memB (opairB w z) F := by
  dsimp [twz]
  exact inf_le_right
have hzu : twz <= relB ? .R z u := by
  have hall := iInf_le
  (fun q : AName A => ? v : AName A,

```



```

    memB q S sqcap memB (opairB q v) F ? relB ?.R v u) w
  have hall' := (iInf_le
    (fun v : AName A =>
      memB w S sqcap memB (opairB w v) F ? relB ?.R v u) z).trans' hall
  exact (le_himp_iff.mp hall').trans' <| le_inf
    (htwzT.trans htUpper) (le_inf htwzMemW htwzFwz)
  have hyz : twz <= eqB y z :=
    (hconst x w y z).trans' <| le_inf
      (le_inf (htwzT.trans htA) (htwzT.trans htFxy)) htwzFwz
  have hzy : twz <= eqB z y := by
    rw [eqB_comm]
    exact hyz
  exact (relB_congr ?.R z y u u).trans' <| le_inf
    (le_inf hzy (le_top.trans (eqB_self (A := A) u).ge)) hzu

/-- A degree-local constant map belongs to the exact internal continuous-map
space at that degree. -/
theorem InternalReflexiveModel.constantMap_le_mapSpace
  (? : InternalReflexiveModel (A := A))
  (F : AName.{u} A) (a : A)
  (hfun : a <= isFunctionB F ?.D ?.D)
  (hconst : forall x x' y y' : AName.{u} A,
    a sqcap memB (opairB x y) F sqcap memB (opairB x' y') F <= eqB y y') :
  a <= memB F ?.C :=
  (?.constantMap_le_scottContinuous F a hfun hconst).trans
  (?.scottContinuous_le_mem_mapSpace F)

/-- Raw graph of a constant generalized element. -/
noncomputable def constantRowGraph
  (D : AName.{u} A) (r : D.idx -> A) : AName.{u} A :=
  mk (D.idx x D.idx)
  (fun p => opairB (D.child p.1) (D.child p.2))
  (fun p => r p.2)

/-- A generalized element gives a degree-local internal constant function. -/
theorem constantRowGraph_le_isFunctionB
  (D : AName.{u} A) (hD : (oid D).IsTotal)
  {a : A} {r : D.idx -> A} (hr : IsRelElementAt D a r) :
  a <= isFunctionB (constantRowGraph D r) D D := by
  unfold isFunctionB
  refine le_inf (le_inf ?_ ?_) ?_
  * unfold constantRowGraph
  rw [subsetB_mk]
  refine le_iInf fun p => ?_
  rw [le_himp_iff, memB_opairB_prodB]
  have hp : r p.2 <= memB (D.child p.2) D := by
    have h := (hr.2.1 p.2).trans inf_le_right
    rwa [oid_eps] at h
  have hi : memB (D.child p.1) D = top := by
    rw [← oid_eps]
    exact hD p.1
  rw [hi, top_inf_eq]
  exact inf_le_right.trans hp
  * refine le_iInf fun x => le_iInf fun y => le_iInf fun z => ?_
  rw [le_himp_iff, constantRowGraph, memB_mk, memB_mk,
    inf_iSup_eq]
  rw [inf_iSup_eq]
  apply iSup_le
  intro p
  rw [← inf_assoc, inf_iSup_eq]
  rw [iSup_inf_eq]
  apply iSup_le
  intro q

```

```

rw [eqB_opairB, eqB_opairB]
let t :=
  a sqcap
    (eqB x (D.child q.1) sqcap eqB y (D.child q.2) sqcap r q.2) sqcap
    (eqB x (D.child p.1) sqcap eqB z (D.child p.2) sqcap r p.2)
change t <= eqB y z
have hyq : t <= eqB y (D.child q.2) := by
  dsimp [t]
  exact inf_le_left.trans
    (inf_le_right.trans (inf_le_left.trans inf_le_right))
have hzp : t <= eqB (D.child p.2) z := by
  have h : t <= eqB z (D.child p.2) := by
    dsimp [t]
    exact inf_le_right.trans (inf_le_left.trans inf_le_right)
  rwa [eqB_comm] at h
have hqp : t <= eqB (D.child q.2) (D.child p.2) := by
  have hrq : t <= r q.2 := by
    dsimp [t]
    exact inf_le_left.trans (inf_le_right.trans inf_le_right)
  have hrp : t <= r p.2 := by
    dsimp [t]
    exact inf_le_right.trans inf_le_right
  have h : t <= (oid D).eq q.2 p.2 :=
    (hr.2.2.1 q.2 p.2).trans' (le_inf hrq hrp)
  rw [oid_eq] at h
  exact h.trans inf_le_right
exact (eqB_trans y (D.child q.2) z).trans' <| le_inf hyq <|
  (eqB_trans (D.child q.2) (D.child p.2) z).trans' <|
    le_inf hqp hzp
* refine le_iInf fun x => ?_
rw [le_himp_iff]
refine (le_inf inf_le_right (inf_le_left.trans hr.2.2.2)).trans ?_
rw [memB_eq (x := x) (y := D), iSup_inf_eq]
refine iSup_le fun i => ?_
rw [inf_iSup_eq]
refine iSup_le fun j => le_iSup_of_le (D.child j) ?_
unfold constantRowGraph
rw [memB_mk]
refine le_iSup_of_le (i, j) ?_
rw [eqB_opairB, eqB_self, inf_top_eq]
exact le_inf (inf_le_left.trans inf_le_left) inf_le_right

/-- Outputs of a raw constant graph are equal independently of their inputs,
at the generalized element's active degree. -/
theorem constantRowGraph_outputs_eq
  (D : AName.{u} A) {a : A} {r : D.idx -> A}
  (hr : IsRelElementAt D a r)
  (x x' y y' : AName.{u} A) :
  a sqcap memB (opairB x y) (constantRowGraph D r) sqcap
    memB (opairB x' y') (constantRowGraph D r) <= eqB y y' := by
  rw [constantRowGraph, memB_mk, memB_mk, inf_iSup_eq]
  apply iSup_le
  intro p
  rw [inf_iSup_eq, iSup_inf_eq]
  apply iSup_le
  intro q
  rw [eqB_opairB, eqB_opairB]
  let t :=
    a sqcap
      (eqB x (D.child q.1) sqcap eqB y (D.child q.2) sqcap r q.2) sqcap
      (eqB x' (D.child p.1) sqcap eqB y' (D.child p.2) sqcap r p.2)
  change t <= eqB y y'
  have hyq : t <= eqB y (D.child q.2) := by

```

```

    dsimp [t]
    exact inf_le_left.trans
      (inf_le_right.trans (inf_le_left.trans inf_le_right))
  have hy'p : t <= eqB (D.child p.2) y' := by
    have h : t <= eqB y' (D.child p.2) := by
      dsimp [t]
      exact inf_le_right.trans (inf_le_left.trans inf_le_right)
    rwa [eqB_comm] at h
  have hqp : t <= eqB (D.child q.2) (D.child p.2) := by
    have hrq : t <= r q.2 := by
      dsimp [t]
      exact inf_le_left.trans (inf_le_right.trans inf_le_right)
    have hrp : t <= r p.2 := by
      dsimp [t]
      exact inf_le_right.trans inf_le_right
    have h : t <= (oid D).eq q.2 p.2 :=
      (hr.2.2.1 q.2 p.2).trans' (le_inf hrq hrp)
    rw [oid_eq] at h
    exact h.trans inf_le_right
  exact (eqB_trans y (D.child q.2) y').trans' <| le_inf hyq <|
    (eqB_trans (D.child q.2) (D.child p.2) y').trans' <|
      le_inf hqp hy'p

/-- Raw constant rows are Scott-continuous at their generalized extent. -/
theorem InternalReflexiveModel.constantRowGraph_le_scottContinuous
  (? : InternalReflexiveModel (A := A))
  {a : A} {r : ?.D.idx -> A} (hr : IsRelElementAt ?.D a r) :
  a <= isScottContinuousB (constantRowGraph ?.D r)
  ?.D ?.D ?.R ?.R :=
  ?.constantMap_le_scottContinuous _ a
  (constantRowGraph_le_isFunctionB ?.D ?.total hr)
  (constantRowGraph_outputs_eq ?.D hr)

/-- Constant syntax produces exactly the raw constant graph of its interpreted
generalized element. -/
theorem interpDKBodyGraph_const_eq_constantRowGraph
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top)
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?.D))
  (x : V.idx) (k : K.idx) :
  interpDKBodyGraph ? V K hK hV ? x (.const k) =
  constantRowGraph ?.D
  (fun d => (oidSubsetRel K ?.D hK).val k d) := by
  unfold interpDKBodyGraph constantRowGraph
  congr 1
  funext p
  rw [interpDKRelVal_const]

/-- Degree-indexed Scott continuity for constant-term body graphs. -/
theorem interpDKBodyGraph_const_le_scottContinuous
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top)
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?.D))
  (x : V.idx) (k : K.idx) :
  lamDKVal V K (.const k) <=
  isScottContinuousB
  (interpDKBodyGraph ? V K hK hV ? x (.const k))
  ?.D ?.D ?.R ?.R := by
  rw [interpDKBodyGraph_const_eq_constantRowGraph]
  have hr :=
  interpDKRelVal_const_isRelElementAt ? V K hK hV ? k

```

```

have heval :
  interpDKRelVal ? V K hK hV ? (.const k) =
    fun d => (oidSubsetRel K ?.D hK).val k d := by
  funext d
  rw [interpDKRelVal_const]
rw [heval] at hr
exact ?.constantRowGraph_le_scottContinuous
hr

/-- Same-child names are equal at every degree at which their coefficients
transport in both directions. -/
theorem le_eqB_mk_same_children {I : Type u}
  (child : I -> AName.{u} A) (v w : I -> A) (a : A)
  (hvw : forall i, a sqcap v i <= w i)
  (hwv : forall i, a sqcap w i <= v i) :
  a <= eqB (mk I child v) (mk I child w) := by
  rw [eqB_eq_subset]
  refine le_inf ?_ ?_
  * rw [subsetB_mk]
    refine le_iInf fun i => ?_
    rw [le_himp_iff]
    exact (hvw i).trans (val_le_memB (mk I child w) i)
  * rw [subsetB_mk]
    refine le_iInf fun i => ?_
    rw [le_himp_iff]
    exact (hwv i).trans (val_le_memB (mk I child v) i)

/-- A variable body is locally the identity on the equality part of update,
and locally the old environment row on the complementary part. -/
theorem interpDKBodyGraph_var_local_eq
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top)
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?.D)) (x y : V.idx) :
  let e := (oid V).eq y x
  e <= eqB
    (interpDKBodyGraph ? V K hK hV ? x (.var y))
    (interpDKBodyGraph ? V K hK hV ? x (.var x)) /\
  e? <= eqB
    (interpDKBodyGraph ? V K hK hV ? x (.var y))
    (constantRowGraph ?.D (fun d => ?.val y d)) := by
  dsimp
  constructor
  * refine le_eqB_mk_same_children
    (fun p : ?.D.idx x ?.D.idx =>
      opairB (?.D.child p.1) (?.D.child p.2)) _ _ ?_ ?_
  * intro p
    rw [interpDKRelVal_var, interpDKRelVal_var]
    exact (?.update hV ?.total x p.1).subst_left y x p.2
  * intro p
    rw [interpDKRelVal_var, interpDKRelVal_var]
    have h := (?.update hV ?.total x p.1).subst_left x y p.2
    rwa [(oid V).symm x y] at h
  * refine le_eqB_mk_same_children
    (fun p : ?.D.idx x ?.D.idx =>
      opairB (?.D.child p.1) (?.D.child p.2)) _ _ ?_ ?_
  * intro p
    rw [interpDKRelVal_var, RelFun.update_val, inf_sup_left]
    refine sup_le ?_ ?_
  * exact (show ((oid V).eq y x)? sqcap
    ((oid V).eq y x sqcap (oid ?.D).eq p.1 p.2) <= False by
    calc
      _ <= ((oid V).eq y x)? sqcap (oid V).eq y x :=

```

```

        le_inf inf_le_left (inf_le_right.trans inf_le_left)
        _ = False := compl_inf_self _).trans bot_le
    * exact inf_le_right.trans inf_le_right
    * intro p
    rw [interpDKRelVal_var, RelFun.update_val]
    exact le_sup_of_le_right le_rfl

/-- The identity graph is Scott-continuous in every internally valid dcpo. -/
theorem InternalReflexiveModel.id_scottContinuous
  (? : InternalReflexiveModel (A := A)) :
  isScottContinuousB (idB ?.D) ?.D ?.D ?.R ?.R = top := by
  unfold isScottContinuousB
  refine inf_eq_top_iff.mpr <inf_eq_top_iff.mpr
  <isFunctionB_id ?.D, ?_, ?_>
  * refine iInf_eq_top.mpr fun x => iInf_eq_top.mpr fun x' =>
    iInf_eq_top.mpr fun y => iInf_eq_top.mpr fun y' =>
      himp_eq_top_iff.mpr ?_
  rw [memB_opairB_idB, memB_opairB_idB]
  exact (relB_congr ?.R x y x' y').trans' <| by
    refine le_inf (le_inf ?_ ?_) inf_le_right
    * exact inf_le_left.trans (inf_le_left.trans inf_le_right)
    * exact inf_le_left.trans (inf_le_right.trans inf_le_right)
  * refine iInf_eq_top.mpr fun S => iInf_eq_top.mpr fun x =>
    iInf_eq_top.mpr fun y => himp_eq_top_iff.mpr ?_
  unfold mapsToSupB
  refine le_inf ?_ ?_
  * refine le_iInf fun w => le_iInf fun z => ?_
  rw [le_himp_iff, memB_opairB_idB]
  have hsup :
    isSupRelB x S ?.R <= isUpperBoundRelB x S ?.R :=
    inf_le_left
  have hub :
    isUpperBoundRelB x S ?.R sqcap memB w S <= relB ?.R w x := by

```

Lean 4 source (lines 801–1200)

```

    exact le_himp_iff.mp (iInf_le
      (fun q : AName A => memB q S ? relB ?.R q x) w)
  have hwz :
    memB (opairB w z) (idB ?.D) <= eqB w z := by
    rw [memB_opairB_idB]
    exact inf_le_right
  exact (relB_congr ?.R w z x y).trans' <| by
    refine le_inf (le_inf ?_ ?_) ?_
    * exact inf_le_right.trans inf_le_right |>.trans hwz
    * exact inf_le_left.trans (inf_le_right.trans inf_le_right)
    * exact hub.trans' <| le_inf
      (inf_le_left.trans (inf_le_left.trans inf_le_right) |>.trans hsup)
      (inf_le_right.trans inf_le_left)
  * refine le_iInf fun u => ?_
  rw [le_himp_iff]
  have hleast :
    isSupRelB x S ?.R sqcap isUpperBoundRelB u S ?.R <=
    relB ?.R x u := by
    exact (le_himp_iff.mp (iInf_le
      (fun q : AName A =>
        isUpperBoundRelB q S ?.R ? relB ?.R x q) u)).trans' <|
      le_inf (inf_le_left.trans inf_le_right) inf_le_right
  have hubu :
    (? w : AName A, ? z : AName A,
      memB w S sqcap memB (opairB w z) (idB ?.D) ?
        relB ?.R z u) sqcap
      isDirectedRelB S ?.D ?.R <=
      isUpperBoundRelB u S ?.R := by

```

```

refine le_iInf fun w => ?_
rw [le_himp_iff]
let t :=
  ((? q : AName A, ? z : AName A,
    memB q S sqcap memB (opairB q z) (idB ?.D) ?
    relB ?.R z u) sqcap
    isDirectedRelB S ?.D ?.R) sqcap memB w S
change t <= relB ?.R w u
have htAll :
  t <= ? q : AName A, ? z : AName A,
    memB q S sqcap memB (opairB q z) (idB ?.D) ?
    relB ?.R z u := by
  dsimp [t]
  exact inf_le_left.trans inf_le_left
have htDir : t <= isDirectedRelB S ?.D ?.R := by
  dsimp [t]
  exact inf_le_left.trans inf_le_right
have htMem : t <= memB w S := by
  dsimp [t]
  exact inf_le_right
have hsub :
  isDirectedRelB S ?.D ?.R <= subsetB S ?.D := by
  unfold isDirectedRelB
  exact inf_le_left.trans inf_le_left
have hwd' :
  subsetB S ?.D sqcap memB w S <= memB w ?.D :=
  by rw [inf_comm]; exact memB_of_subsetB w S ?.D
have hid :
  memB w ?.D <= memB (opairB w w) (idB ?.D) := by
  rw [memB_opairB_idB, eqB_self, inf_top_eq]
have hall := iInf_le
  (fun q : AName A => ? z : AName A,
    memB q S sqcap memB (opairB q z) (idB ?.D) ?
    relB ?.R z u) w
have hall' := (iInf_le
  (fun z : AName A =>
    memB w S sqcap memB (opairB w z) (idB ?.D) ?
    relB ?.R z u) w).trans' hall
exact (le_himp_iff.mp hall').trans' <| by
  refine le_inf htAll (le_inf htMem ?_)
exact (hwd'.trans' <|
  le_inf (htDir.trans hsub) htMem).trans hid
exact (relB_congr ?.R x y u u).trans' <| by
  refine le_inf (le_inf ?_ ?_) ?_
* have hxy :
  memB (opairB x y) (idB ?.D) <= eqB x y := by
  rw [memB_opairB_idB]
  exact inf_le_right
  exact inf_le_left.trans inf_le_right |>.trans hxy
* exact le_top.trans (eqB_self (A := A) u).ge
* exact hleast.trans' <| le_inf
  (inf_le_left.trans (inf_le_left.trans inf_le_right))
  (hubu.trans' <| le_inf inf_le_right
    (inf_le_left.trans (inf_le_left.trans inf_le_left)))

```

/-- The body graph of the overwritten variable is the identity relation,
extensionally in the Boolean-valued universe. -/

```

theorem interpDKBodyGraph_var_eq_id
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top )
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?.D)) (x : V.idx) :
  eqB (interpDKBodyGraph ? V K hK hV ? x (.var x))

```

```

      (idB ?.D) = top := by
have hgraph :
  interpDKBodyGraph ? V K hK hV ? x (.var x) =
    relFunGraphName ?.D ?.D (RelFun.id (oid ?.D)) := by
  unfold interpDKBodyGraph relFunGraphName
  congr 1
  funext p
  rw [interpDKRelVal_var, RelFun.update_self]
  rfl
rw [hgraph]
apply eqB_top_of_function_matrix
  (isFunctionB_relFunGraphName ?.D ?.D (RelFun.id (oid ?.D)))
  (isFunctionB_id ?.D)
intro i j
rw [memB_opairB_relFunGraphName, memB_opairB_idB]
change (oid ?.D).eq i j =
  memB (?.D.child i) ?.D sqcap eqB (?.D.child i) (?.D.child j)
have hi : memB (?.D.child i) ?.D = top := by
  rw [← oid_eps]
  exact ?.total i
have hj : memB (?.D.child j) ?.D = top := by
  rw [← oid_eps]
  exact ?.total j
rw [oid_eq, hi, hj, top_inf_eq]

/-- Degree-indexed Scott continuity of the body-variable map in the branch
where the body variable is the overwritten abstraction variable. -/
theorem interpDKBodyGraph_var_scottContinuous
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top )
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?.D)) (x : V.idx) :
  isScottContinuousB
    (interpDKBodyGraph ? V K hK hV ? x (.var x))
    ?.D ?.D ?.R ?.R = top := by
let F := interpDKBodyGraph ? V K hK hV ? x (.var x)
have heq : eqB F (idB ?.D) = top :=
  interpDKBodyGraph_var_eq_id ? V K hK hV ? x
have hidC : memB (idB ?.D) ?.C = top :=
  ?.mem_mapSpace_of_scottContinuous (idB ?.D) ?.id_scottContinuous
have hFC : memB F ?.C = top := by
  apply top_unique
  exact (memB_eqB_left (idB ?.D) ?.C F).trans' <| by
    rw [eqB_comm, heq, hidC, inf_top_eq]
  apply top_unique
  exact (?.mem_mapSpace_le_scottContinuous F).trans' <| by rw [hFC]

/-- Scott continuity of every variable body graph. Boolean equality with the
overwritten variable selects the identity branch; its complement selects the
constant old-environment row. -/
theorem interpDKBodyGraph_any_var_scottContinuous
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top )
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?.D)) (x y : V.idx) :
  isScottContinuousB
    (interpDKBodyGraph ? V K hK hV ? x (.var y))
    ?.D ?.D ?.R ?.R = top := by
let e := (oid V).eq y x
let F := interpDKBodyGraph ? V K hK hV ? x (.var y)
let I := interpDKBodyGraph ? V K hK hV ? x (.var x)
let C_0 := constantRowGraph ?.D (fun d => ?.val y d)
have heq := interpDKBodyGraph_var_local_eq ? V K hK hV ? x y

```

```

change e <= eqB F I /\ e? <= eqB F C_0 at heq
have hIC : memB I ?.C = top := by
  apply top_unique
  exact (?.scottContinuous_le_mem_mapSpace I).trans' <| by
    rw [show isScottContinuousB I ?.D ?.D ?.R ?.R = top from
      interpDKBodyGraph_var_scottContinuous ? V K hK hV ? x]
have hr : IsRelElementAt ?.D top (fun d => ?.val y d) := by
  have h := isRelElementAt_of_relFun (?.at y)
  rw [ <- hV y]
  simpa only [RelFun.at_val] using h
have hC_OC : memB C_0 ?.C = top := by
  apply top_unique
  exact (?.scottContinuous_le_mem_mapSpace C_0).trans' <| by
    exact ?.constantRowGraph_le_scottContinuous hr
apply ?.scottContinuous_of_mapSpace_cover F e
* exact (inf_eqB_memB_le_memB e F I ?.C).trans' <|
  le_inf (le_inf le_rfl heq.1) (le_top.trans hIC.ge)
* exact (inf_eqB_memB_le_memB e? F C_0 ?.C).trans' <|
  le_inf (le_inf le_rfl heq.2) (le_top.trans hC_OC.ge)

/-- Membership in the internal continuous-map space entails the internal
function predicate, at the same Boolean degree. -/
theorem InternalReflexiveModel.mem_mapSpace_le_function
  (? : InternalReflexiveModel (A := A)) (F : AName.{u} A) :
  memB F ?.C <= isFunctionB F ?.D ?.D := by
  have hcont := ?.mem_mapSpace_le_scottContinuous F
  unfold isScottContinuousB at hcont
  exact hcont.trans (inf_le_left.trans inf_le_left)

/-- The internal order on `C` entails pointwise order at the same degree. -/
theorem InternalReflexiveModel.relQ_le_pointwise
  (? : InternalReflexiveModel (A := A))
  (F G : AName.{u} A) :
  memB F ?.C sqcap memB G ?.C sqcap relB ?.Q F G <=
  pointwiseLeB F G ?.D ?.R := by
  have hall := (inf_eq_top_iff.mp ?.pointwise_valid).2
  have hFG := iInf_eq_top.mp (iInf_eq_top.mp hall F) G
  have houter := himp_eq_top_iff.mp hFG
  have hfwd :
    memB F ?.C sqcap memB G ?.C <=
    relB ?.Q F G ? pointwiseLeB F G ?.D ?.R :=
    houter.trans inf_le_left
  exact le_himp_iff.mp hfwd

/-- Pointwise comparison of two members of `C` entails their `Q`-order. -/
theorem InternalReflexiveModel.pointwise_le_relQ
  (? : InternalReflexiveModel (A := A))
  (F G : AName.{u} A) :
  memB F ?.C sqcap memB G ?.C sqcap
  pointwiseLeB F G ?.D ?.R <=
  relB ?.Q F G := by
  have hall := (inf_eq_top_iff.mp ?.pointwise_valid).2
  have hFG := iInf_eq_top.mp (iInf_eq_top.mp hall F) G
  have houter := himp_eq_top_iff.mp hFG
  have hrev :
    memB F ?.C sqcap memB G ?.C <=
    pointwiseLeB F G ?.D ?.R ? relB ?.Q F G :=
    houter.trans inf_le_right
  exact le_himp_iff.mp hrev

/-- Pointwise order compares outputs of two internal continuous maps at a
common argument. -/
theorem InternalReflexiveModel.relQ_apply

```



```

    (? : InternalReflexiveModel (A := A))
    (F G x y z : AName.{u} A) :
    (memB F ?.C sqcap memB G ?.C sqcap relB ?.Q F G) sqcap
      (memB x ?.D sqcap memB (opairB x y) F sqcap
        memB (opairB x z) G) <=
      relB ?.R y z := by
have hp := ?.relQ_le_pointwise F G
unfold pointwiseLeB at hp
have hx := iInf_le
  (fun w : AName A => ? y' : AName A, ? z' : AName A,
    memB w ?.D sqcap memB (opairB w y') F sqcap
    memB (opairB w z') G ? relB ?.R y' z') x
have hy := (iInf_le
  (fun y' : AName A => ? z' : AName A,
    memB x ?.D sqcap memB (opairB x y') F sqcap
    memB (opairB x z') G ? relB ?.R y' z') y).trans' hx
have hz := (iInf_le
  (fun z' : AName A =>
    memB x ?.D sqcap memB (opairB x y) F sqcap
    memB (opairB x z') G ? relB ?.R y z') z).trans' hy
exact (le_himp_iff.mp hz).trans' <| le_inf
  (inf_le_left.trans hp) inf_le_right

/-- Every member of the exact map space is monotone on `D`, in an immediately
applicable degree-local form. -/
theorem InternalReflexiveModel.mem_mapSpace_apply_mono
  (? : InternalReflexiveModel (A := A))
  (F x x' y y' : AName.{u} A) :
  memB F ?.C sqcap memB (opairB x y) F sqcap
    memB (opairB x' y') F sqcap relB ?.R x x' <=
    relB ?.R y y' := by
have hc := ?.mem_mapSpace_le_scottContinuous F
unfold isScottContinuousB at hc
have hm : memB F ?.C <=
  ? u : AName A, ? u' : AName A,
  ? v : AName A, ? v' : AName A,
  memB (opairB u v) F sqcap memB (opairB u' v') F sqcap
  relB ?.R u u' ? relB ?.R v v' :=
  hc.trans (inf_le_left.trans inf_le_right)
have hx := (iInf_le
  (fun u : AName A => ? u' : AName A,
    ? v : AName A, ? v' : AName A,
    memB (opairB u v) F sqcap memB (opairB u' v') F sqcap
    relB ?.R u u' ? relB ?.R v v') x).trans' hm
have hx' := (iInf_le
  (fun u' : AName A => ? v : AName A, ? v' : AName A,
    memB (opairB x v) F sqcap memB (opairB u' v') F sqcap
    relB ?.R x u' ? relB ?.R v v') x').trans' hx
have hy := (iInf_le
  (fun v : AName A => ? v' : AName A,
    memB (opairB x v) F sqcap memB (opairB x' v') F sqcap
    relB ?.R x x' ? relB ?.R v v') y).trans' hx'
have hy' := (iInf_le
  (fun v' : AName A =>
    memB (opairB x y) F sqcap memB (opairB x' v') F sqcap
    relB ?.R x x' ? relB ?.R y v') y').trans' hy
refine (le_himp_iff.mp hy').trans' ?_
apply le_of_eq
ac_rfl

/-- Degree-local monotonicity projection from Scott continuity. -/
theorem scottContinuous_apply_mono
  {F D E R Q : AName.{u} A} {a : A}

```

```

(hF : a <= isScottContinuousB F D E R Q)
(x x' y y' : AName.{u} A) :
a sqcap memB (opairB x y) F sqcap
  memB (opairB x' y') F sqcap relB R x x' <=
  relB Q y y' := by
unfold isScottContinuousB at hF
have hm := hF.trans (inf_le_left.trans inf_le_right)
have hx := (iInf_le
  (fun u : AName A => ? u' : AName A,
    ? v : AName A, ? v' : AName A,
    memB (opairB u v) F sqcap memB (opairB u' v') F sqcap
    relB R u u' ? relB Q v v') x).trans' hm
have hx' := (iInf_le
  (fun u' : AName A => ? v : AName A, ? v' : AName A,
    memB (opairB x v) F sqcap memB (opairB u' v') F sqcap
    relB R x u' ? relB Q v v') x').trans' hx
have hy := (iInf_le
  (fun v : AName A => ? v' : AName A,
    memB (opairB x v) F sqcap memB (opairB x' v') F sqcap
    relB R x x' ? relB Q v v') y).trans' hx'
have hy' := (iInf_le
  (fun v' : AName A =>
    memB (opairB x y) F sqcap memB (opairB x' v') F sqcap
    relB R x x' ? relB Q y v') y').trans' hy
refine (le_himp_iff.mp hy').trans' ?_
apply le_of_eq
ac_rfl

/-- Degree-local directed-supremum projection from Scott continuity. -/
theorem scottContinuous_mapsToSup
{F D E R Q : AName.{u} A} {a : A}
(hF : a <= isScottContinuousB F D E R Q)
(S x y : AName.{u} A) :
a sqcap isDirectedRelB S D R sqcap isSupRelB x S R sqcap
  memB (opairB x y) F <=
  mapsToSupB F S y Q := by
unfold isScottContinuousB at hF
have hs := hF.trans inf_le_right
have hS := (iInf_le
  (fun T : AName A => ? u : AName A, ? v : AName A,
    isDirectedRelB T D R sqcap isSupRelB u T R sqcap
    memB (opairB u v) F ? mapsToSupB F T v Q) S).trans' hs
have hx := (iInf_le
  (fun u : AName A => ? v : AName A,
    isDirectedRelB S D R sqcap isSupRelB u S R sqcap
    memB (opairB u v) F ? mapsToSupB F S v Q) x).trans' hS
have hy := (iInf_le
  (fun v : AName A =>
    isDirectedRelB S D R sqcap isSupRelB x S R sqcap
    memB (opairB x v) F ? mapsToSupB F S v Q) y).trans' hx
refine (le_himp_iff.mp hy).trans' ?_
apply le_of_eq
ac_rfl

/-- The displayed index type of an internal Cartesian product. -/
noncomputable def prodBIdxEquiv (X Y : AName.{u} A) :
  (prodB X Y).idx ? X.idx x Y.idx := by
  unfold prodB
  exact Equiv.refl _

noncomputable def prodBIdxOf
  (X Y : AName.{u} A) (i : X.idx) (j : Y.idx) :
  (prodB X Y).idx :=

```

```

(prodBIIdxEquiv X Y).symm (i, j)

@[simp] theorem prodBIIdxEquiv_idxOf
  (X Y : AName.{u} A) (i : X.idx) (j : Y.idx) :
  prodBIIdxEquiv X Y (prodBIIdxOf X Y i j) = (i, j) :=
  (prodBIIdxEquiv X Y).apply_symm_apply (i, j)

@[simp] theorem prodB_child_eq
  (X Y : AName.{u} A) (p : (prodB X Y).idx) :
  (prodB X Y).child p =
    opairB (X.child ((prodBIIdxEquiv X Y p).1))
      (Y.child ((prodBIIdxEquiv X Y p).2)) := by
  unfold prodBIIdxEquiv prodB
  rfl

@[simp] theorem prodB_child_idxOf
  (X Y : AName.{u} A) (i : X.idx) (j : Y.idx) :
  (prodB X Y).child (prodBIIdxOf X Y i j) =
    opairB (X.child i) (Y.child j) := by
  rw [prodB_child_eq, prodBIIdxEquiv_idxOf]

@[simp] theorem prodB_val_eq
  (X Y : AName.{u} A) (p : (prodB X Y).idx) :
  (prodB X Y).val p =
    memB (X.child ((prodBIIdxEquiv X Y p).1)) X sqcap
      memB (Y.child ((prodBIIdxEquiv X Y p).2)) Y := by
  unfold prodBIIdxEquiv prodB
  rfl

@[simp] theorem prodB_val_idxOf
  (X Y : AName.{u} A) (i : X.idx) (j : Y.idx) :
  (prodB X Y).val (prodBIIdxOf X Y i j) =
    memB (X.child i) X sqcap memB (Y.child j) Y := by
  rw [prodB_val_eq, prodBIIdxEquiv_idxOf]

theorem oid_prodB_eq
  (X Y : AName.{u} A) (p q : (prodB X Y).idx) :
  (oid (prodB X Y)).eq p q =
    ((oid X).prod (oid Y)).eq
      (prodBIIdxEquiv X Y p) (prodBIIdxEquiv X Y q) := by
  rw [oid_eq, ASetoid.prod_eq, oid_eq, oid_eq,
    prodB_child_eq, prodB_child_eq,
    memB_opairB_prodB, memB_opairB_prodB, eqB_opairB]
  ac_rfl

theorem oid_prodB_eps
  (X Y : AName.{u} A) (p : (prodB X Y).idx) :
  (oid (prodB X Y)).eps p =
    ((oid X).prod (oid Y)).eps (prodBIIdxEquiv X Y p) := by
  rw [ASetoid.eps, ASetoid.eps, oid_prodB_eq]

/-- Transport a relational map on the displayed product setoid to the `Oid`
of the internal product name. -/
noncomputable def relFunOnProdB
  (X Y Z : AName.{u} A)
  (f : RelFun ((oid X).prod (oid Y)) (oid Z)) :
  RelFun (oid (prodB X Y)) (oid Z) where

```

Lean 4 source (lines 1201–1600)

```

val p z := f.val (prodBIIdxEquiv X Y p) z
respects := by
  intro p q z w
  rw [oid_prodB_eq]

```

```

    exact f.respects _ _ z w
le_eps := by
  intro p z
  rw [oid_prodB_eps]
  exact f.le_eps _ z
single_valued := by
  intro p z w
  exact f.single_valued _ z w
total := by
  intro p
  rw [oid_prodB_eps]
  exact f.total _

@[simp] theorem relFunOnProdB_val
  (X Y Z : AName.{u} A)
  (f : RelFun ((oid X).prod (oid Y)) (oid Z))
  (p : (prodB X Y).idx) (z : Z.idx) :
  (relFunOnProdB X Y Z f).val p z =
  f.val (prodBIdxEquiv X Y p) z :=
rfl

/-- The componentwise relation on an internal Cartesian product, using the
displayed product coordinates rather than any definitional identification of
(prodB X Y).idx. -/
noncomputable def prodOrderRelB
  (X Y RX RY : AName.{u} A) : AName.{u} A :=
mk ((X.idx x Y.idx) x (X.idx x Y.idx))
  (fun p =>
    opairB
      (opairB (X.child p.1.1) (Y.child p.1.2))
      (opairB (X.child p.2.1) (Y.child p.2.2)))
  (fun p =>
    relB RX (X.child p.1.1) (X.child p.2.1) sqcap
    relB RY (Y.child p.1.2) (Y.child p.2.2))

theorem le_relB_prodOrderRelB
  (X Y RX RY : AName.{u} A)
  (i i' : X.idx) (j j' : Y.idx) :
  relB RX (X.child i) (X.child i') sqcap
  relB RY (Y.child j) (Y.child j') <=
  relB (prodOrderRelB X Y RX RY)
  (opairB (X.child i) (Y.child j))
  (opairB (X.child i') (Y.child j')) := by
unfold relB prodOrderRelB
rw [memB_mk]
refine le_iSup_of_le ((i, j), (i', j')) ?_
rw [eqB_self, top_inf_eq]
exact le_rfl

@[simp] theorem relB_prodOrderRelB
  (X Y RX RY : AName.{u} A)
  (i i' : X.idx) (j j' : Y.idx) :
  relB (prodOrderRelB X Y RX RY)
  (opairB (X.child i) (Y.child j))
  (opairB (X.child i') (Y.child j')) =
  relB RX (X.child i) (X.child i') sqcap
  relB RY (Y.child j) (Y.child j') := by
apply le_antisymm
* unfold relB prodOrderRelB
rw [memB_mk]
refine iSup_le fun p => ?_
rw [eqB_opairB, eqB_opairB, eqB_opairB]
let t :=

```

```

      ((eqB (X.child i) (X.child p.1.1) sqcap
        eqB (Y.child j) (Y.child p.1.2)) sqcap
      (eqB (X.child i') (X.child p.2.1) sqcap
        eqB (Y.child j') (Y.child p.2.2))) sqcap
      (relB RX (X.child p.1.1) (X.child p.2.1) sqcap
        relB RY (Y.child p.1.2) (Y.child p.2.2))
change t <= _
have hxi : t <= eqB (X.child p.1.1) (X.child i) := by
  rw [eqB_comm]
  exact inf_le_left.trans (inf_le_left.trans inf_le_left)
have hxi' : t <= eqB (X.child p.2.1) (X.child i') := by
  rw [eqB_comm]
  exact inf_le_left.trans (inf_le_right.trans inf_le_left)
have hyj : t <= eqB (Y.child p.1.2) (Y.child j) := by
  rw [eqB_comm]
  exact inf_le_left.trans (inf_le_left.trans inf_le_right)
have hyj' : t <= eqB (Y.child p.2.2) (Y.child j') := by
  rw [eqB_comm]
  exact inf_le_left.trans (inf_le_right.trans inf_le_right)
refine le_inf ?_ ?_
* exact (relB_congr RX
  (X.child p.1.1) (X.child i)
  (X.child p.2.1) (X.child i')).trans' <|
  le_inf (le_inf hxi hxi') (inf_le_right.trans inf_le_left)
* exact (relB_congr RY
  (Y.child p.1.2) (Y.child j)
  (Y.child p.2.2) (Y.child j')).trans' <|
  le_inf (le_inf hyj hyj') (inf_le_right.trans inf_le_right)
* exact le_relB_prodOrderRelB X Y RX RY i i' j j'

/-- The graph used by the abstraction clause is Scott-continuous at every
Boolean degree at which it belongs to the internal map space. -/
theorem interpDKBodyGraph_mem_le_scottContinuous
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top )
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?.D))
  (x : V.idx) (P : LamDK V.idx K.idx) :
  memB (interpDKBodyGraph ? V K hK hV ? x P) ?.C <=
    isScottContinuousB
      (interpDKBodyGraph ? V K hK hV ? x P)
      ?.D ?.D ?.R ?.R :=
  ?.mem_mapSpace_le_scottContinuous _

/-- Degree-indexed version of choosing the codomain component of a pair from
the presented domain of an internal relation. -/
theorem inf_memB_opairB_le_iSup_child {a : A} {F X Y : AName.{u} A}
  (hsup : a <= subsetB F (prodB X Y)) (x y : AName.{u} A) :
  a sqcap memB (opairB x y) F <=
    bigcup j : Y.idx, memB (opairB x (Y.child j)) F := by
have hmem : a sqcap memB (opairB x y) F <= memB y Y := by
  have h := (memB_of_subsetB (opairB x y) F (prodB X Y)).trans' <|
    le_inf inf_le_right (inf_le_left.trans hsup)
  rw [memB_opairB_prodB] at h
  exact h.trans inf_le_right
refine (le_inf le_refl hmem).trans ?_
rw [memB_eq (x := y) (y := Y), inf_iSup_eq]
refine iSup_le fun j => le_iSup_of_le j ?_
refine (memB_opairB_congr F x x y (Y.child j)).trans' ?_
refine le_inf (le_inf ?_ (inf_le_right.trans inf_le_left)) ?_
* exact le_top.trans (eqB_self (A := A) x).ge
* exact inf_le_left.trans inf_le_right

```

```

/-- Evaluation is a relational function from an internal continuous map and
an argument to its value. This is the internal analogue of continuous-map
application at the underlying setoid level. -/
noncomputable def InternalReflexiveModel.evalRel
  (? : InternalReflexiveModel (A := A)) :
  RelFun ((oid ?.C).prod (oid ?.D)) (oid ?.D) where
val p y :=
  memB (?.C.child p.1) ?.C sqcap
  memB (opairB (?.D.child p.2) (?.D.child y)) (?.C.child p.1)
respects := by
  intro p_1 p_2 y_1 y_2
  refine le_inf ?_ ?_ <;> rw [le_himp_iff]
  * let t :=
    ((oid ?.C).prod (oid ?.D)).eq p_1 p_2 sqcap
    (oid ?.D).eq y_1 y_2 sqcap
    (memB (?.C.child p_1.1) ?.C sqcap
      memB (opairB (?.D.child p_1.2) (?.D.child y_1))
        (?.C.child p_1.1))
  change t <= -
  have hs : t <= ((oid ?.C).prod (oid ?.D)).eq p_1 p_2 := by
    dsimp [t]
    exact inf_le_left.trans inf_le_left
  have ht : t <= (oid ?.D).eq y_1 y_2 := by
    dsimp [t]
    exact inf_le_left.trans inf_le_right
  have hv0 : t <= memB (?.C.child p_1.1) ?.C sqcap
    memB (opairB (?.D.child p_1.2) (?.D.child y_1))
      (?.C.child p_1.1) := by
    dsimp [t]
    exact inf_le_right
  have hC_2 : t <= memB (?.C.child p_2.1) ?.C := by
    have h := hs.trans
      (((oid ?.C).prod (oid ?.D)).eq_le_eps_right p_1 p_2)
    change t <= (oid ?.C).eps p_2.1 sqcap (oid ?.D).eps p_2.2 at h
    rw [oid_eps] at h
    exact h.trans inf_le_left
  have hFF : t <= eqB (?.C.child p_1.1) (?.C.child p_2.1) := by
    have h : ((oid ?.C).prod (oid ?.D)).eq p_1 p_2 <=
      (oid ?.C).eq p_1.1 p_2.1 := by
      rw [ASetoid.prod_eq]
      exact inf_le_left
    exact hs.trans h |>.trans (by rw [oid_eq]; exact inf_le_right)
  have hxx : t <= eqB (?.D.child p_1.2) (?.D.child p_2.2) := by
    have h : ((oid ?.C).prod (oid ?.D)).eq p_1 p_2 <=
      (oid ?.D).eq p_1.2 p_2.2 := by
      rw [ASetoid.prod_eq]
      exact inf_le_right
    exact hs.trans h |>.trans (by rw [oid_eq]; exact inf_le_right)
  have hyy : t <= eqB (?.D.child y_1) (?.D.child y_2) := by
    exact ht.trans (by rw [oid_eq]; exact inf_le_right)
  have hv : t <= memB
    (opairB (?.D.child p_1.2) (?.D.child y_1))
    (?.C.child p_1.1) := by
    exact hv0.trans inf_le_right
  refine le_inf hC_2 ?_
  refine (memB_eqB_right (?.C.child p_1.1)
    (opairB (?.D.child p_2.2) (?.D.child y_2))
    (?.C.child p_2.1)).trans' (le_inf ?_ hFF)
  exact (memB_opairB_congr (?.C.child p_1.1)
    (?.D.child p_1.2) (?.D.child p_2.2)
    (?.D.child y_1) (?.D.child y_2)).trans'
    (le_inf (le_inf hxx hyy) hv)
  * let t :=

```

```

      ((oid ?.C).prod (oid ?.D)).eq p_1 p_2 sqcap
      (oid ?.D).eq y_1 y_2 sqcap
      (memB (?.C.child p_2.1) ?.C sqcap
        memB (opairB (?.D.child p_2.2) (?.D.child y_2))
          (?.C.child p_2.1))
change t <= _
have hs : t <= ((oid ?.C).prod (oid ?.D)).eq p_1 p_2 := by
  dsimp [t]
  exact inf_le_left.trans inf_le_left
have ht : t <= (oid ?.D).eq y_1 y_2 := by
  dsimp [t]
  exact inf_le_left.trans inf_le_right
have hv0 : t <= memB (?.C.child p_2.1) ?.C sqcap
  memB (opairB (?.D.child p_2.2) (?.D.child y_2))
    (?.C.child p_2.1) := by
  dsimp [t]
  exact inf_le_right
have hC_1 : t <= memB (?.C.child p_1.1) ?.C := by
  have h := hs.trans
    (((oid ?.C).prod (oid ?.D)).eq_le_eps_left p_1 p_2)
  change t <= (oid ?.C).eps p_1.1 sqcap (oid ?.D).eps p_1.2 at h
  rw [oid_eps] at h
  exact h.trans inf_le_left
have hFF : t <= eqB (?.C.child p_2.1) (?.C.child p_1.1) := by
  have h : ((oid ?.C).prod (oid ?.D)).eq p_1 p_2 <=
    (oid ?.C).eq p_1.1 p_2.1 := by
    rw [ASetoid.prod_eq]
    exact inf_le_left
  have h' := hs.trans h
  rw [(oid ?.C).symm p_1.1 p_2.1, oid_eq] at h'
  exact h'.trans inf_le_right
have hxx : t <= eqB (?.D.child p_2.2) (?.D.child p_1.2) := by
  have h : ((oid ?.C).prod (oid ?.D)).eq p_1 p_2 <=
    (oid ?.D).eq p_1.2 p_2.2 := by
    rw [ASetoid.prod_eq]
    exact inf_le_right
  have h' := hs.trans h
  rw [(oid ?.D).symm p_1.2 p_2.2, oid_eq] at h'
  exact h'.trans inf_le_right
have hyy : t <= eqB (?.D.child y_2) (?.D.child y_1) := by
  have h := ht
  rw [(oid ?.D).symm y_1 y_2, oid_eq] at h
  exact h.trans inf_le_right
have hv : t <= memB
  (opairB (?.D.child p_2.2) (?.D.child y_2))
  (?.C.child p_2.1) := by
  exact hv0.trans inf_le_right
refine le_inf hC_1 ?_
refine (memB_eqB_right (?.C.child p_2.1)
  (opairB (?.D.child p_1.2) (?.D.child y_1))
  (?.C.child p_1.1)).trans' (le_inf ?_ hFF)
exact (memB_opairB_congr (?.C.child p_2.1)
  (?.D.child p_2.2) (?.D.child p_1.2)
  (?.D.child y_2) (?.D.child y_1)).trans'
  (le_inf (le_inf hxx hyy) hv)
le_eps := by
  intro p y
  change (memB (?.C.child p.1) ?.C sqcap
    memB (opairB (?.D.child p.2) (?.D.child y))
      (?.C.child p.1)) <=
    ((oid ?.C).eps p.1 sqcap (oid ?.D).eps p.2) sqcap
    (oid ?.D).eps y
  have hfun := ?.mem_mapSpace_le_function (?.C.child p.1)

```

```

have hmem : memB (?C.child p.1) ?C sqcap
  memB (opairB (?D.child p.2) (?D.child y))
    (?C.child p.1) <=
  memB (?D.child p.2) ?D sqcap
  memB (?D.child y) ?D := by
have hsub : memB (?C.child p.1) ?C <=
  subsetB (?C.child p.1) (prodB ?D ?D) :=
  hfun.trans (inf_le_left.trans inf_le_left)
have hm := (memB_of_subsetB
  (opairB (?D.child p.2) (?D.child y))
  (?C.child p.1) (prodB ?D ?D)).trans' <|
  le_inf inf_le_right (inf_le_left.trans hsub)
rwa [memB_opairB_prodB] at hm
rw [oid_eps, oid_eps, oid_eps]
exact le_inf
  (le_inf inf_le_left (hmem.trans inf_le_left))
  (hmem.trans inf_le_right)
single_valued := by
intro p y_1 y_2
have hfun := ?mem_mapSpace_le_function (?C.child p.1)
have hsv := isSingleValuedB_apply (?C.child p.1)
  (?D.child p.2) (?D.child y_1) (?D.child y_2)
have hsupport (y : ?D.idx) :
  memB (?C.child p.1) ?C sqcap
  memB (opairB (?D.child p.2) (?D.child y))
    (?C.child p.1) <=
  memB (?D.child p.2) ?D sqcap memB (?D.child y) ?D := by
have hsub : memB (?C.child p.1) ?C <=
  subsetB (?C.child p.1) (prodB ?D ?D) :=
  hfun.trans (inf_le_left.trans inf_le_left)
have hm := (memB_of_subsetB
  (opairB (?D.child p.2) (?D.child y))
  (?C.child p.1) (prodB ?D ?D)).trans' <|
  le_inf inf_le_right (inf_le_left.trans hsub)
rwa [memB_opairB_prodB] at hm
change _ <= (oid ?D).eq y_1 y_2
rw [oid_eq]
refine le_inf (le_inf ?_ ?_) ?_
* exact inf_le_left.trans (hsupport y_1) |>.trans inf_le_right
* exact inf_le_right.trans (hsupport y_2) |>.trans inf_le_right
* exact hsv.trans' <| le_inf
  (le_inf
    (inf_le_left.trans inf_le_left |>.trans hfun |>.trans
      (inf_le_left.trans inf_le_right))
    (inf_le_left.trans inf_le_right))
  (inf_le_right.trans inf_le_right)
total := by
intro p
change (oid ?C).eps p.1 sqcap (oid ?D).eps p.2 <=
  bigcup y, memB (?C.child p.1) ?C sqcap
  memB (opairB (?D.child p.2) (?D.child y))
    (?C.child p.1)
rw [oid_eps, oid_eps]
have hfun := ?mem_mapSpace_le_function (?C.child p.1)
have httotal := isTotalB_apply (?C.child p.1) ?D
  (?D.child p.2)
have hgraph : memB (?C.child p.1) ?C sqcap
  memB (?D.child p.2) ?D <=
  bigcup y, memB (opairB (?D.child p.2) (?D.child y))
    (?C.child p.1) := by
have hall := httotal.trans' (le_inf
  (inf_le_left.trans hfun |>.trans
    inf_le_right)

```



```

      (relFunOfIsRelElementAt hr).prod (relFunOfIsRelElementAt hs)

@[simp] theorem applyRelOfElements_val
  (? : InternalReflexiveModel (A := A))
  {a b : A} {r s : ?D.idx → A}
  (hr : IsRelElementAt ?D a r)
  (hs : IsRelElementAt ?D b s)
  (i : PUnit.{u + 1} × PUnit.{u + 1}) (d : ?D.idx) :
  (applyRelOfElements ? hr hs).val i d =
    bigcup c : ?C.idx, bigcup q' : ?D.idx, bigcup p : ?D.idx,
      bigcup q : ?D.idx,
        r p sqcap s q sqcap
      memB (opairB (?D.child p) (?C.child c)) ?Fun sqcap
      (oid ?D).eq q q' sqcap
      memB (?C.child c) ?C sqcap
      memB (opairB (?D.child q') (?D.child d))
        (?C.child c) := by
  simp only [applyRelOfElements, RelFun.comp_val, RelFun.prod_val,

```

Lean 4 source (lines 1601–1646)

```

      relFunOfIsRelElementAt_val, oidRel_val, RelFun.id,
      InternalReflexiveModel.evalRel]
simp_rw [iSup_prod]
simp_rw [iSup_inf_eq]
apply iSup_congr
intro c
apply iSup_congr
intro q'
apply iSup_congr
intro p
apply iSup_congr
intro q
ac_rfl

/-- Application case of the extent-indexed fundamental relation lemma. -/
theorem interpDKRelVal_app_isRelElementAt
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?D = top)
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?D))
  (P Q : LamDK V.idx K.idx)
  (hP : IsRelElementAt ?D (lamDKVal V K P)
    (interpDKRelVal ? V K hK hV ? P))
  (hQ : IsRelElementAt ?D (lamDKVal V K Q)
    (interpDKRelVal ? V K hK hV ? Q)) :
  IsRelElementAt ?D (lamDKVal V K (.app P Q))
    (interpDKRelVal ? V K hK hV ? (.app P Q)) := by
  let f := applyRelOfElements ? hP hQ
  have h := isRelElementAt_of_relFun
    (f.at (PUnit.unit, PUnit.unit))
  change IsRelElementAt ?D
    (lamDKVal V K P sqcap lamDKVal V K Q)
    (fun d => f.val (PUnit.unit, PUnit.unit) d) at h
  change IsRelElementAt ?D
    (lamDKVal V K P sqcap lamDKVal V K Q) _
  have heval :
    interpDKRelVal ? V K hK hV ? (.app P Q) =
      fun d => f.val (PUnit.unit, PUnit.unit) d := by
    funext d
    rw [interpDKRelVal_app]
    exact (applyRelOfElements_val ? hP hQ
      (PUnit.unit, PUnit.unit) d).symm
  rw [heval]

```

```

exact h

end Scott2026

```

A.28 Scott2026/InternalEvalFamily.lean

156 lines.

Lean 4 source

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/

import Scott2026.InternalInterp
import Scott2026.InternalEval

/-!
# Parametricity of the internal evaluator

The abstraction case of Theorem 26 requires induction over a whole
Boolean-valued family of environments. This module proves the extensional
transport part of that strong induction.
-/

universe u

namespace Scott2026

open AName

variable {A : Type u} [CompleteBooleanAlgebra A]

/-- Two names with the same displayed children are Boolean-equal to degree
`a` when their coefficients transport in both directions to degree `a`. -/
theorem le_eqB_mk_of_le_val {I : Type u} (child : I → AName.{u} A)
  (v w : I → A) (a : A)
  (hvw : forall i, a ≤ sqcap v i <= w i)
  (hvw : forall i, a ≤ sqcap w i <= v i) :
  a ≤ eqB (mk I child v) (mk I child w) := by
  rw [eqB_eq_subset]
  refine le_inf ?_ ?_
  * rw [subsetB_mk]
    refine le_iInf fun i => ?_
    rw [le_himp_iff]
    exact (hvw i).trans (val_le_memB (mk I child w) i)
  * rw [subsetB_mk]
    refine le_iInf fun i => ?_
    rw [le_himp_iff]
    exact (hvw i).trans (val_le_memB (mk I child v) i)

/-- The recursive interpretation transports pointwise along every
extensional family of relational environments. This is deliberately
quantified over the family: abstraction updates do not commute strictly for
fuzzy variable equality. -/
theorem interpDKRelVal_isPointwiseFamily
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top)
  (hV : (oid V).IsTotal)
  {U : Type*} (S : ASetoid (A := A) U)
  (? : U → RelFun (oid V) (oid ?.D))

```

```

(h? : RelFun.IsPointwiseFamily S ?)
(M : LamDK V.idx K.idx) :
forall u v d, S.eq u v sqcap
  interpDKRelVal ? V K hK hV (? u) M d <=
  interpDKRelVal ? V K hK hV (? v) M d := by
induction M generalizing U with
| var x =>
  intro u v d
  rw [interpDKRelVal_var, interpDKRelVal_var]
  exact h? u v x d
| const k =>
  intro u v d
  rw [interpDKRelVal_const, interpDKRelVal_const]
  exact inf_le_right
| app P Q ihP ihQ =>
  intro u v d
  rw [interpDKRelVal_app, interpDKRelVal_app, inf_iSup_eq]
  refine iSup_le fun c => le_iSup_of_le c ?_
  rw [inf_iSup_eq]
  refine iSup_le fun q' => le_iSup_of_le q' ?_
  rw [inf_iSup_eq]
  refine iSup_le fun p => le_iSup_of_le p ?_
  rw [inf_iSup_eq]
  refine iSup_le fun q => le_iSup_of_le q ?_
  let z : A :=
    memB (opairB (?D.child p) (?C.child c)) ?Fun sqcap
    (oid ?D).eq q q' sqcap
    memB (?C.child c) ?C sqcap
    memB (opairB (?D.child q') (?D.child d))
    (?C.child c)
  have hP := ihP S ? h? u v p
  have hQ := ihQ S ? h? u v q
  have hPQ : S.eq u v sqcap
    (interpDKRelVal ? V K hK hV (? u) P p sqcap
     interpDKRelVal ? V K hK hV (? u) Q q) <=
    (interpDKRelVal ? V K hK hV (? v) P p sqcap
     interpDKRelVal ? V K hK hV (? v) Q q) := by
  calc
    S.eq u v sqcap
    (interpDKRelVal ? V K hK hV (? u) P p sqcap
     interpDKRelVal ? V K hK hV (? u) Q q) <=
    (S.eq u v sqcap
     interpDKRelVal ? V K hK hV (? u) P p) sqcap
    (S.eq u v sqcap
     interpDKRelVal ? V K hK hV (? u) Q q) := by
    apply le_of_eq
    ac_rfl
  _ <= _ := inf_le_inf hP hQ
calc
  _ = (S.eq u v sqcap
    (interpDKRelVal ? V K hK hV (? u) P p sqcap
     interpDKRelVal ? V K hK hV (? u) Q q)) sqcap z := by
    dsimp [z]
    ac_rfl
  _ <= (interpDKRelVal ? V K hK hV (? v) P p sqcap
    interpDKRelVal ? V K hK hV (? v) Q q) sqcap z :=
    inf_le_inf hPQ le_rfl
  _ = _ := by
    dsimp [z]
    ac_rfl
| abs x P ih =>
  intro u v d
  rw [interpDKRelVal_abs, interpDKRelVal_abs]

```

```

let body (w : U) :=
  interpDKBodyGraph ? V K hK hV (? w) x P
have hbody_transport : forall w_1 w_2 p, S.eq w_1 w_2 sqcap
  (body w_1).val p <= (body w_2).val p := by
  intro w_1 w_2 p
  let replacement : U -> ?.D.idx := fun _ => p.1
  have hrepl : APoset.Functional S (oid ?.D) replacement := by
    intro z_1 z_2
    change S.eq z_1 z_2 <= (oid ?.D).eps p.1
    rw [?.total p.1]
    exact le_top
  have hupd := h?.update hV ?.total x replacement hrepl
  exact ih S (fun w => (? w).update hV ?.total x p.1)
  hupd w_1 w_2 p.2
have hbody_fwd : forall p, S.eq u v sqcap
  (body u).val p <= (body v).val p :=
  hbody_transport u v
have hbody_rev : forall p, S.eq u v sqcap
  (body v).val p <= (body u).val p := by
  intro p
  have h := hbody_transport v u p
  rwa [S.symm v u] at h
have heq : S.eq u v <= eqB (body u) (body v) := by
  exact le_eqB_mk_of_le_val
  (fun p : ?.D.idx x ?.D.idx =>
    opairB (?.D.child p.1) (?.D.child p.2))
  (body u).val (body v).val (S.eq u v) hbody_fwd hbody_rev
let fixed := memB (V.child x) V sqcap lamDKVal V K P
change S.eq u v sqcap
  (fixed sqcap memB (opairB (body u) (?.D.child d)) ?.Lam) <=
  fixed sqcap memB (opairB (body v) (?.D.child d)) ?.Lam
refine le_inf (inf_le_right.trans inf_le_left) ?_
refine (memB_opairB_congr ?.Lam (body u) (body v)
  (?.D.child d) (?.D.child d)).trans' ?_
refine le_inf (le_inf ?_ ?_) ?_
* exact inf_le_left.trans heq
* exact le_top.trans (eqB_self (A := A) (?.D.child d)).ge
* exact inf_le_right.trans inf_le_right

```

end Scott2026

A.29 Scott2026/InternalEvalComplete.lean

5914 lines.

Lean 4 source (lines 1–400)

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/

import Scott2026.InternalEvalFamily

/-!
# Completion of internal evaluation

This module supplies the degree-local normalization of abstraction body
graphs, the directed-image calculus, fixed-argument evaluation, and the
pointwise-supremum graph of a directed family in `C`.
-/

```

```

universe u

namespace Scott2026

open AName

variable {A : Type u} [CompleteBooleanAlgebra A]

namespace IsRelElementAt

/-- A generalized element transports its coefficients along target equality. -/
theorem respects {D : AName.{u} A} {a : A} {r : D.idx -> A}
  (h : IsRelElementAt D a r) (d e : D.idx) :
  (oid D).eq d e sqcap r d <= r e :=
  h.1 d e

end IsRelElementAt

/-- At the active degree of all its rows, membership in an evaluator body
graph is normalized by its displayed coefficient. -/
theorem interpDKBodyGraph_mem_normalize
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top)
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?.D))
  (x : V.idx) (P : LamDK V.idx K.idx) (a : A)
  (hP : forall d, IsRelElementAt ?.D a
    (interpDKRelVal ? V K hK hV
      (? .update hV ?.total x d) P))
  (d e : ?.D.idx) :
  interpDKRelVal ? V K hK hV
    (? .update hV ?.total x d) P e <=
  memB (opairB (? .D.child d) (? .D.child e))
    (interpDKBodyGraph ? V K hK hV ? x P) /\
  a sqcap memB (opairB (? .D.child d) (? .D.child e))
    (interpDKBodyGraph ? V K hK hV ? x P) <=
  interpDKRelVal ? V K hK hV
    (? .update hV ?.total x d) P e := by
  constructor
  * exact val_le_memB
    (interpDKBodyGraph ? V K hK hV ? x P) (d, e)
  * unfold interpDKBodyGraph
    rw [memB_mk, inf_iSup_eq]
    refine iSup_le fun p => ?_
    rw [eqB_opairB]
    let r (q : ?.D.idx) :=
      interpDKRelVal ? V K hK hV
        (? .update hV ?.total x q) P
    let t := a sqcap
      ((eqB (? .D.child d) (? .D.child p.1) sqcap
        eqB (? .D.child e) (? .D.child p.2)) sqcap r p.1 p.2)
    change t <= r d e
    have hsrc : t <= (oid ?.D).eq p.1 d := by
      rw [oid_eq_of_total ?.D ?.total, eqB_comm]
      exact inf_le_right.trans (inf_le_left.trans inf_le_left)
    have hout : t <= (oid ?.D).eq p.2 e := by
      rw [oid_eq_of_total ?.D ?.total, eqB_comm]
      exact inf_le_right.trans (inf_le_left.trans inf_le_right)
    have hval : t <= r p.1 p.2 := by
      exact inf_le_right.trans inf_le_right
    have hparam :
      (oid ?.D).eq p.1 d sqcap r p.1 p.2 <= r d p.2 := by
      exact interpDKRelVal_isPointwiseFamily ? V K hK hV

```

```

    (oid ?.D)
    (fun q => ?.update hV ?.total x q)
    (RelFun.isPointwiseFamily_update ? hV ?.total x)
    P p.1 d p.2
    exact (hP d).respects p.2 e |>.trans' <|
    le_inf hout (hparam.trans' (le_inf hsrc hval))

/-- Equality form of `interpDKBodyGraph_mem_normalize`: the row hypothesis
also says that the row coefficient is already supported by `a`. -/
theorem inf_memB_interpDKBodyGraph_eq
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top)
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?.D))
  (x : V.idx) (P : LamDK V.idx K.idx) (a : A)
  (hP : forall d, IsRelElementAt ?.D a
    (interpDKRelVal ? V K hK hV
      (?.update hV ?.total x d) P))
  (d e : ?.D.idx) :
  a sqcap memB (opairB (?.D.child d) (?.D.child e))
  (interpDKBodyGraph ? V K hK hV ? x P) =
  interpDKRelVal ? V K hK hV
  (?.update hV ?.total x d) P e := by
  apply le_antisymm
  * exact (interpDKBodyGraph_mem_normalize
    ? V K hK hV ? x P a hP d e).2
  * have hsupp :
    interpDKRelVal ? V K hK hV
    (?.update hV ?.total x d) P e <= a :=
    ((hP d).2.1 e).trans inf_le_left
  exact le_inf hsupp
  (interpDKBodyGraph_mem_normalize
    ? V K hK hV ? x P a hP d e).1

/-- The internal image of `S` under a graph `F`, presented with the displayed
codomain of `E`. Separation makes codomain membership explicit. -/
noncomputable def graphImageB
  (F S E : AName.{u} A) : AName.{u} A :=
  sepB E (fun y =>
    bigcup x : AName.{u} A, memB x S sqcap memB (opairB x y) F)

/-- Membership in the canonical graph image. -/
@[simp] theorem memB_graphImageB
  (F S E y : AName.{u} A) :
  memB y (graphImageB F S E) =
  memB y E sqcap
  bigcup x : AName.{u} A, memB x S sqcap memB (opairB x y) F := by
  unfold graphImageB
  apply memB_sepB
  intro y_1 y_2
  rw [inf_iSup_eq]
  refine iSup_le fun x => le_iSup_of_le x ?_
  refine le_inf (inf_le_right.trans inf_le_left) ?_
  exact (memB_opairB_congr F x x y_1 y_2).trans' <| by
    refine le_inf (le_inf ?_ ?_) ?_
  * exact le_top.trans (eqB_self (A := A) x).ge
  * exact inf_le_left
  * exact inf_le_right.trans inf_le_right

/-- The upper-bound projection of `mapsToSupB`. -/
theorem mapsToSupB_upper_apply
  (F S y Q x z : AName.{u} A) :
  mapsToSupB F S y Q sqcap memB x S sqcap memB (opairB x z) F <=

```

```

    relB Q z y := by
  unfold mapsToSupB
  have hx := iInf_le
    (fun w : AName A => ? v : AName A,
      memB w S sqcap memB (opairB w v) F ? relB Q v y) x
  have hz := (iInf_le
    (fun v : AName A =>
      memB x S sqcap memB (opairB x v) F ? relB Q v y) z).trans' hx
  refine (le_himp_iff.mp hz).trans' (le_inf ?_ ?_)
  * exact (inf_le_left.trans inf_le_left).trans inf_le_left
  * exact le_inf (inf_le_left.trans inf_le_right) inf_le_right

/-- The least-upper-bound projection of `mapsToSupB`. -/
theorem mapsToSupB_least_apply
  (F S y Q u : AName.{u} A) :
  mapsToSupB F S y Q sqcap
    (? x : AName A, ? z : AName A,
      memB x S sqcap memB (opairB x z) F ? relB Q z u) <=
    relB Q y u := by
  unfold mapsToSupB
  have hu := iInf_le
    (fun v : AName A =>
      (? x : AName A, ? z : AName A,
        memB x S sqcap memB (opairB x z) F ? relB Q z v) ?
        relB Q y v) u
  refine (le_himp_iff.mp hu).trans' (le_inf ?_ inf_le_right)
  exact inf_le_left.trans inf_le_right

/-- Binary directedness applied to two members. -/
theorem isDirectedRelB_upper_apply
  (S D R x y : AName.{u} A) :
  isDirectedRelB S D R sqcap memB x S sqcap memB y S <=
    bigcup z : AName A,
      memB z S sqcap relB R x z sqcap relB R y z := by
  unfold isDirectedRelB
  have hx := iInf_le
    (fun u : AName A => ? v : AName A,
      memB u S sqcap memB v S ?
        bigcup z : AName A,
          memB z S sqcap relB R u z sqcap relB R v z) x
  have hy := (iInf_le
    (fun v : AName A =>
      memB x S sqcap memB v S ?
        bigcup z : AName A,
          memB z S sqcap relB R x z sqcap relB R v z) y).trans' hx
  refine (le_himp_iff.mp hy).trans' (le_inf ?_ ?_)
  * exact (inf_le_left.trans inf_le_left).trans inf_le_right
  * exact le_inf (inf_le_left.trans inf_le_right) inf_le_right

/-- The value selected by an `a`-local function edge belongs to its
codomain at degree `a`. -/
theorem local_function_edge_le_codomain
  {a : A} {F D E : AName.{u} A}
  (hF : a <= isFunctionB F D E) (x y : AName.{u} A) :
  a sqcap memB (opairB x y) F <= memB y E := by
  have hsub : a <= subsetB F (prodB D E) :=
    hF.trans (inf_le_left.trans inf_le_left)
  have hm := memB_of_subsetB (opairB x y) F (prodB D E)
  have hp : a sqcap memB (opairB x y) F <=
    memB (opairB x y) (prodB D E) :=
    hm.trans' (le_inf inf_le_right (inf_le_left.trans hsub))
  rw [memB_opairB_prodB] at hp
  exact hp.trans inf_le_right

```



```

/-- The source of an `a`-local function edge belongs to its domain. -/
theorem local_function_edge_le_domain
  {a : A} {F D E : AName.{u} A}
  (hF : a <= isFunctionB F D E) (x y : AName.{u} A) :
  a sqcap memB (opairB x y) F <= memB x D := by
  have hsub : a <= subsetB F (prodB D E) :=
    hF.trans (inf_le_left.trans inf_le_left)
  have hm := memB_of_subsetB (opairB x y) F (prodB D E)
  have hp : a sqcap memB (opairB x y) F <=
    memB (opairB x y) (prodB D E) :=
    hm.trans' (le_inf inf_le_right (inf_le_left.trans hsub))
  rw [memB_opairB_prodB] at hp
  exact hp.trans inf_le_left

/-- If `F` maps the supremum of `S` to `y`, then `y` is the supremum of the
canonical image of `S`. -/
theorem mapsToSupB_le_isSup_graphImageB
  {a : A} {F S D E Q y : AName.{u} A}
  (hF : a <= isFunctionB F D E) :
  a sqcap mapsToSupB F S y Q <=
    isSupRelB y (graphImageB F S E) Q := by
  unfold isSupRelB
  refine le_inf ?_ ?_
  * unfold isUpperBoundRelB
    refine le_iInf fun (z : AName A) => ?_
    rw [le_himp_iff, memB_graphImageB, inf_iSup_eq (a := A)]
    rw [inf_iSup_eq]
    apply iSup_le
    intro x
    change (a sqcap mapsToSupB F S y Q) sqcap
      (memB z E sqcap
        (memB x S sqcap memB (opairB x z) F)) <= relB Q z y
    refine (mapsToSupB_upper_apply F S y Q x z).trans' ?_
    refine le_inf (le_inf ?_ ?_) ?_
    * exact inf_le_left.trans inf_le_right
    * exact inf_le_right.trans (inf_le_right.trans inf_le_left)
    * exact inf_le_right.trans (inf_le_right.trans inf_le_right)
  * refine le_iInf fun u => ?_
    rw [le_himp_iff]
    let upper :=
      ? z : AName A, memB z (graphImageB F S E) ? relB Q z u
    have hpoint :
      a sqcap upper <=
        ? x : AName A, ? z : AName A,
          memB x S sqcap memB (opairB x z) F ? relB Q z u := by
      refine le_iInf fun x => le_iInf fun z => ?_
      rw [le_himp_iff]
      have hzE :
        a sqcap memB (opairB x z) F <= memB z E :=
          local_function_edge_le_codomain hF x z
      have hzImage :
        a sqcap memB x S sqcap memB (opairB x z) F <=
          memB z (graphImageB F S E) := by
        rw [memB_graphImageB]
        refine le_inf ?_ ?_
        * exact hzE.trans' <| by
            exact le_inf (inf_le_left.trans inf_le_left) inf_le_right
        * refine le_iSup_of_le x ?_
            exact le_inf (inf_le_left.trans inf_le_right) inf_le_right
      have hu := iInf_le
        (fun v : AName A =>
          memB v (graphImageB F S E) ? relB Q v u) z

```

```

    exact (le_himp_iff.mp hu).trans' <| le_inf
      (inf_le_left.trans inf_le_right)
      (hzImage.trans' <| le_inf
        (le_inf (inf_le_left.trans inf_le_left)
          (inf_le_right.trans inf_le_left))
        (inf_le_right.trans inf_le_right))
    exact (mapsToSupB_least_apply F S y Q u).trans' <|
      le_inf (inf_le_left.trans inf_le_right) <|
        hpoint.trans' <| le_inf
          (inf_le_left.trans inf_le_left) inf_le_right

/-- A degree-local function that is monotone on a locally directed set
sends that set to a locally directed canonical image. Scott continuity is
not required. -/
theorem isDirectedRelB_graphImageB
  {a : A} (F S D E R Q : AName.{u} A)
  (hF : a <= isFunctionB F D E)
  (hmono : forall x x' y y' : AName.{u} A,
    a sqcap memB (opairB x y) F sqcap
      memB (opairB x' y') F sqcap relB R x x' <=
        relB Q y y') :
  a sqcap isDirectedRelB S D R <=
    isDirectedRelB (graphImageB F S E) E Q := by
change a sqcap isDirectedRelB S D R <=
  (subsetB (graphImageB F S E) E sqcap
    (bigcup y : AName A, memB y (graphImageB F S E))) sqcap
  ? y : AName A, ? z : AName A,
    memB y (graphImageB F S E) sqcap
    memB z (graphImageB F S E) ?
    bigcup v : AName A,
    memB v (graphImageB F S E) sqcap
    relB Q y v sqcap relB Q z v
refine le_inf (le_inf ?_ ?_) ?_
* unfold graphImageB sepB
  rw [subsetB_mk]
  refine le_iInf fun i => ?_
  rw [le_himp_iff]
  exact (inf_le_right.trans inf_le_left).trans (val_le_memB E i)
* have hnonempty :
  isDirectedRelB S D R <= bigcup x : AName A, memB x S := by
  unfold isDirectedRelB
  exact inf_le_left.trans inf_le_right
  refine (le_inf le_rfl (inf_le_right.trans hnonempty)).trans ?_
  rw [inf_iSup_eq]
  refine iSup_le fun x => ?_
  have hxD :
    a sqcap isDirectedRelB S D R sqcap memB x S <= memB x D := by
  have hsub :
    isDirectedRelB S D R <= subsetB S D := by
  unfold isDirectedRelB
  exact inf_le_left.trans inf_le_left
  exact (memB_of_subsetB x S D).trans' <| le_inf
    inf_le_right ((inf_le_left.trans inf_le_right).trans hsub)
  have httotal :
    a sqcap isDirectedRelB S D R sqcap memB x S <=
      bigcup y : AName A, memB (opairB x y) F := by
  exact (isTotalB_apply F D x).trans' <| le_inf
    ((inf_le_left.trans inf_le_left).trans hF |>.trans
      inf_le_right)
  hxD
  refine (le_inf le_rfl httotal).trans ?_
  rw [inf_iSup_eq]
  refine iSup_le fun y => le_iSup_of_le y ?_

```

```

rw [memB_graphImageB]
have hyE :
  a sqcap memB (opairB x y) F <= memB y E :=
    local_function_edge_le_codomain hF x y
refine le_inf ?_ (le_iSup_of_le x ?_)
* exact hyE.trans' <| le_inf
  (inf_le_left.trans (inf_le_left.trans inf_le_left)) inf_le_right
* exact le_inf
  (inf_le_left.trans inf_le_right) inf_le_right
* refine le_iInf fun y => le_iInf fun z => ?_
  rw [le_himp_iff, memB_graphImageB, memB_graphImageB]
  rw [inf_iSup_eq (a := A)]
  rw [ <- inf_assoc, inf_iSup_eq (a := A)]
  rw [iSup_inf_eq (a := A)]
  apply iSup_le
  intro x
  rw [inf_iSup_eq (a := A)]
  rw [inf_iSup_eq (a := A)]
  apply iSup_le
  intro x'
  let t :=
    (a sqcap isDirectedRelB S D R sqcap
      (memB y E sqcap
        (memB x S sqcap memB (opairB x y) F))) sqcap
      (memB z E sqcap
        (memB x' S sqcap memB (opairB x' z) F)))
  change t <= bigcup v : AName A,
    memB v (graphImageB F S E) sqcap relB Q y v sqcap relB Q z v
  have hcommon :
    t <= bigcup w : AName A,
      memB w S sqcap relB R x w sqcap relB R x' w := by
    exact (isDirectedRelB_upper_apply S D R x x').trans' <| by
      refine le_inf (le_inf ?_ ?_) ?_
      * exact inf_le_left.trans (inf_le_left.trans inf_le_right)
      * exact inf_le_left.trans
        (inf_le_right.trans (inf_le_right.trans inf_le_left))
      * exact inf_le_right.trans (inf_le_right.trans inf_le_left)
  refine (le_inf le_refl hcommon).trans ?_
  rw [inf_iSup_eq]
  refine iSup_le fun w => ?_
  have hwd : t sqcap
    (memB w S sqcap relB R x w sqcap relB R x' w) <= memB w D := by
  have hsub :
    isDirectedRelB S D R <= subsetB S D := by
    unfold isDirectedRelB
    exact inf_le_left.trans inf_le_left
  exact (memB_of_subsetB w S D).trans' <| le_inf
    (inf_le_right.trans (inf_le_left.trans inf_le_left))
    ((inf_le_left.trans
      (inf_le_left.trans (inf_le_left.trans inf_le_right))))
  have hv :
    t sqcap (memB w S sqcap relB R x w sqcap relB R x' w) <=
      bigcup v : AName A, memB (opairB w v) F := by
    exact (isTotalB_apply F D w).trans' <| le_inf
      ((inf_le_left.trans (inf_le_left.trans
        (inf_le_left.trans inf_le_left))))
      (inf_le_right)
  hwd
  refine (le_inf le_refl hv).trans ?_
  rw [inf_iSup_eq]
  refine iSup_le fun v => le_iSup_of_le v ?_
  let twv :=
    (t sqcap (memB w S sqcap relB R x w sqcap relB R x' w)) sqcap

```

```

    memB (opairB w v) F
change twv <=
  memB v (graphImageB F S E) sqcap relB Q y v sqcap relB Q z v
have hvE : twv <= memB v E := by
  exact (local_function_edge_le_codomain hF w v).trans' <| le_inf
    (inf_le_left.trans (inf_le_left.trans (inf_le_left.trans

```

Lean 4 source (lines 401–800)

```

    (inf_le_left.trans inf_le_left)))) inf_le_right
have hvImage : twv <= memB v (graphImageB F S E) := by
  rw [memB_graphImageB]
  refine le_inf hvE (le_iSup_of_le w ?_)
  exact le_inf
    (inf_le_left.trans
      (inf_le_right.trans (inf_le_left.trans inf_le_left))) inf_le_right
have hyv : twv <= relB Q y v := by
  exact (hmono x w y v).trans' <| by
    refine le_inf (le_inf (le_inf ?_ ?_) ?_) ?_
    * exact inf_le_left.trans (inf_le_left.trans (inf_le_left.trans
      (inf_le_left.trans inf_le_left)))
    * exact inf_le_left.trans (inf_le_left.trans
      (inf_le_left.trans (inf_le_right.trans
        (inf_le_right.trans inf_le_right))))
    * exact inf_le_right
    * exact inf_le_left.trans
      (inf_le_right.trans (inf_le_left.trans inf_le_right))
have hzv : twv <= relB Q z v := by
  exact (hmono x' w z v).trans' <| by
    refine le_inf (le_inf (le_inf ?_ ?_) ?_) ?_
    * exact inf_le_left.trans (inf_le_left.trans (inf_le_left.trans
      (inf_le_left.trans inf_le_left)))
    * exact inf_le_left.trans (inf_le_left.trans
      (inf_le_right.trans (inf_le_right.trans inf_le_right)))
    * exact inf_le_right
    * exact inf_le_left.trans
      (inf_le_right.trans inf_le_right)
  exact le_inf (le_inf hvImage hyv) hzv

/-- A compact bridge from Scott continuity at a source supremum to the
directed image and its displayed supremum. -/
theorem scottContinuous_image_sup
  {a : A} (F S D E R Q x y : AName.{u} A)
  (hF : a <= isScottContinuousB F D E R Q) :
  a sqcap isDirectedRelB S D R sqcap isSupRelB x S R sqcap
  memB (opairB x y) F <=
  isDirectedRelB (graphImageB F S E) E Q sqcap
  isSupRelB y (graphImageB F S E) Q := by
  have hfun : a <= isFunctionB F D E :=
    hF.trans (inf_le_left.trans inf_le_left)
  refine le_inf ?_ ?_
  * exact (isDirectedRelB_graphImageB F S D E R Q hfun
    (fun u u' v v' => scottContinuous_apply_mono hF u u' v v')).trans' <| by
    exact le_inf (inf_le_left.trans (inf_le_left.trans inf_le_left))
      (inf_le_left.trans (inf_le_left.trans inf_le_right))
  * exact (mapsToSupB_le_isSup_graphImageB F S D E Q y hfun).trans' <|
    le_inf
      (inf_le_left.trans (inf_le_left.trans inf_le_left))
      (scottContinuous_mapsToSup hF S x y |>.trans' <| by
        apply le_of_eq
        ac_rfl)

/-- The slice of the verified evaluation graph at a fixed argument `x`.
An edge `(F, y)` means `F` in `C` and `(x, y)` in `F`, i.e. `y = F(x)`. -/

```

```

noncomputable def InternalReflexiveModel.evalAtGraph
  (? : InternalReflexiveModel (A := A)) (x : AName.{u} A) :
  AName.{u} A :=
  AName.mk (?C.idx x ?D.idx)
  (fun p => opairB (?C.child p.1) (?D.child p.2))
  (fun p =>
    memB (?C.child p.1) ?C sqcap
    memB (opairB x (?D.child p.2)) (?C.child p.1))

/-- On displayed children the slice recovers the verified `evalGraph`. -/
theorem InternalReflexiveModel.evalAtGraph_val_eq_memB_evalGraph
  (? : InternalReflexiveModel (A := A))
  (c : ?C.idx) (x y : ?D.idx) :
  (evalAtGraph ? (?D.child x)).val (c, y) =
  memB
    (opairB
      (opairB (?C.child c) (?D.child x))
      (?D.child y))
  ?evalGraph := by
  unfold evalAtGraph
  exact (?memB_evalGraph_at c x y).symm

/-- Graph membership in the fixed-argument slice projects to evaluation. -/
theorem InternalReflexiveModel.memB_evalAtGraph_le
  (? : InternalReflexiveModel (A := A))
  (x F y : AName.{u} A) :
  memB (opairB F y) (evalAtGraph ? x) <=
  memB F ?C sqcap memB (opairB x y) F := by
  unfold InternalReflexiveModel.evalAtGraph
  rw [memB_mk]
  refine iSup_le fun p => ?_
  rw [eqB_opairB]
  let t :=
    (eqB F (?C.child p.1) sqcap eqB y (?D.child p.2)) sqcap
    (memB (?C.child p.1) ?C sqcap
      memB (opairB x (?D.child p.2)) (?C.child p.1))
  change t <= memB F ?C sqcap memB (opairB x y) F
  have hFC : t <= memB F ?C := by
    refine (memB_eqB_left (?C.child p.1) ?C F).trans' ?_
    refine le_inf (inf_le_right.trans inf_le_left) ?_
    rw [eqB_comm]
    exact inf_le_left.trans inf_le_left
  have hFy : t <= memB (opairB x y) F := by
    have hchild : t <= memB (opairB x y) (?C.child p.1) := by
      refine (memB_opairB_congr (?C.child p.1) x x
        (?D.child p.2) y).trans' ?_
      refine le_inf (le_inf ?_ ?_) ?_
      * exact le_top.trans (eqB_self (A := A) x).ge
      * rw [eqB_comm]
      exact inf_le_left.trans inf_le_right
      * exact inf_le_right.trans inf_le_right
    refine (memB_eqB_right (?C.child p.1) (opairB x y) F).trans' ?_
    refine le_inf hchild ?_
    rw [eqB_comm]
    exact inf_le_left.trans inf_le_left
  exact le_inf hFC hFy

/-- At the degree of its argument, fixed-argument evaluation is an
internal function `C -> D`. -/
theorem InternalReflexiveModel.evalAtGraph_le_isFunctionB
  (? : InternalReflexiveModel (A := A))
  (x : AName.{u} A) :
  memB x ?D <= isFunctionB (evalAtGraph ? x) ?C ?D := by

```

```

unfold isFunctionB
refine le_inf (le_inf ?_ ?_) ?_
* unfold evalAtGraph
  rw [subsetB_mk]
  refine le_iInf fun p => ?_
  rw [le_himp_iff, memB_opairB_prodB]
  let t :=
    memB x ?D sqcap
      (memB (?C.child p.1) ?C sqcap
        memB (opairB x (?D.child p.2)) (?C.child p.1))
  change t <=
    memB (?C.child p.1) ?C sqcap memB (?D.child p.2) ?D
  refine le_inf (inf_le_right.trans inf_le_left) ?_
  have hfun :
    memB (?C.child p.1) ?C <=
      isFunctionB (?C.child p.1) ?D ?D :=
    ?_mem_mapSpace_le_function (?C.child p.1)
  have hsub :
    memB (?C.child p.1) ?C <=
      subsetB (?C.child p.1) (prodB ?D ?D) :=
    hfun.trans (inf_le_left.trans inf_le_left)
  have hm : t <=
    memB (opairB x (?D.child p.2)) (prodB ?D ?D) :=
    (memB_of_subsetB
      (opairB x (?D.child p.2))
      (?C.child p.1) (prodB ?D ?D)).trans' <|
    le_inf (inf_le_right.trans inf_le_right)
      (inf_le_right.trans (inf_le_left.trans hsub))
  rw [memB_opairB_prodB] at hm
  exact hm.trans inf_le_right
* refine le_iInf fun F => le_iInf fun y => le_iInf fun z => ?_
  rw [le_himp_iff]
  let t :=
    memB x ?D sqcap
      (memB (opairB F y) (evalAtGraph ? x) sqcap
        memB (opairB F z) (evalAtGraph ? x))
  change t <= eqB y z
  have hy : t <= memB F ?C sqcap memB (opairB x y) F :=
    (?_memB_evalAtGraph_le x F y).trans' <|
    inf_le_right.trans inf_le_left
  have hz : t <= memB F ?C sqcap memB (opairB x z) F :=
    (?_memB_evalAtGraph_le x F z).trans' <|
    inf_le_right.trans inf_le_right
  have hfun : t <= isFunctionB F ?D ?D :=
    (?_mem_mapSpace_le_function F).trans' (hy.trans inf_le_left)
  exact (isSingleValuedB_apply F x y z).trans' <|
    le_inf (le_inf (hfun.trans (inf_le_left.trans inf_le_right))
      (hy.trans inf_le_right))
      (hz.trans inf_le_right)
* refine le_iInf fun F => ?_
  rw [le_himp_iff]
  have hfunF : memB F ?C <= isFunctionB F ?D ?D :=
    ?_mem_mapSpace_le_function F
  have htot :
    memB x ?D sqcap memB F ?C <=
      bigcup y : AName A, memB (opairB x y) F :=
    (isTotalB_apply F ?D x).trans' <| le_inf
      ((inf_le_right.trans hfunF).trans inf_le_right) inf_le_left
  refine (le_inf le_rfl htot).trans ?_
  rw [inf_iSup_eq]
  refine iSup_le fun y => ?_
  have hsub : memB F ?C <= subsetB F (prodB ?D ?D) :=
    hfunF.trans (inf_le_left.trans inf_le_left)

```

```

have hyd :
  (memB x ?.D sqcap memB F ?.C) sqcap memB (opairB x y) F <=
    bigcup d : ?.D.idx, memB (opairB x (?.D.child d)) F :=
      (inf_memB_opairB_le_iSup_child hsub x y).trans' <|
        le_inf (inf_le_left.trans inf_le_right) inf_le_right
  refine (le_inf le_refl hyd).trans ?_
  rw [inf_iSup_eq]
  refine iSup_le fun d => le_iSup_of_le (?.D.child d) ?_
  let t :=
    ((memB x ?.D sqcap memB F ?.C) sqcap memB (opairB x y) F) sqcap
      memB (opairB x (?.D.child d)) F
  change t <= memB (opairB F (?.D.child d)) (evalAtGraph ? x)
  have hFC : t <= memB F ?.C :=
    inf_le_left.trans (inf_le_left.trans inf_le_right)
  have hFd : t <= memB (opairB x (?.D.child d)) F := inf_le_right
  refine (le_inf hFC hFd).trans ?_
  rw [memB_eq (x := F) (y := ?.C), iSup_inf_eq]
  refine iSup_le fun c => ?_
  unfold InternalReflexiveModel.evalAtGraph
  rw [memB_mk]
  refine le_iSup_of_le (c, d) ?_
  rw [eqB_opairB, eqB_self, inf_top_eq]
  let s :=
    (eqB F (?.C.child c) sqcap (?.C.val c)) sqcap
      memB (opairB x (?.D.child d)) F
  change s <=
    eqB F (?.C.child c) sqcap
      (memB (?.C.child c) ?.C sqcap
        memB (opairB x (?.D.child d)) (?.C.child c))
  refine le_inf (inf_le_left.trans inf_le_left) (le_inf ?_ ?_)
  * exact (val_le_memB ?.C c).trans' (inf_le_left.trans inf_le_right)
  * exact (memB_eqB_right F (opairB x (?.D.child d))
    (?.C.child c)).trans' <|
    le_inf inf_le_right (inf_le_left.trans inf_le_left)

/-- Fixed-argument evaluation is monotone from `(C, Q)` to `(D, R)` by
the pointwise comparison `relQ_apply`. -/
theorem InternalReflexiveModel.evalAtGraph_apply_mono
  (? : InternalReflexiveModel (A := A))
  (x F G y z : AName.{u} A) :
  memB x ?.D sqcap
    memB (opairB F y) (evalAtGraph ? x) sqcap
    memB (opairB G z) (evalAtGraph ? x) sqcap
    relB ?.Q F G <=
      relB ?.R y z := by
  have hF : memB (opairB F y) (evalAtGraph ? x) <=
    memB F ?.C sqcap memB (opairB x y) F :=
      ?.memB_evalAtGraph_le x F y
  have hG : memB (opairB G z) (evalAtGraph ? x) <=
    memB G ?.C sqcap memB (opairB x z) G :=
      ?.memB_evalAtGraph_le x G z
  exact (?.relQ_apply F G x y z).trans' <| by
    refine le_inf (le_inf (le_inf ?_ ?_) ?_)
      (le_inf (le_inf ?_ ?_) ?_)
  * exact inf_le_left.trans (inf_le_left.trans inf_le_right) |>.trans
    (hF.trans inf_le_left)
  * exact inf_le_left.trans inf_le_right |>.trans (hG.trans inf_le_left)
  * exact inf_le_right
  * exact inf_le_left.trans (inf_le_left.trans inf_le_left)
  * exact inf_le_left.trans (inf_le_left.trans inf_le_right) |>.trans
    (hF.trans inf_le_right)
  * exact inf_le_left.trans inf_le_right |>.trans (hG.trans inf_le_right)

```

```

/-- The image of a locally directed subset of `C` under evaluation at a
fixed argument is locally directed in `D`. -/
theorem InternalReflexiveModel.evalAtGraph_image_directed
  (? : InternalReflexiveModel (A := A))
  {a : A} (x S : AName.{u} A)
  (hx : a <= memB x ?D) :
  a sqcap isDirectedRelB S ?C ?Q <=
    isDirectedRelB (graphImageB (evalAtGraph ? x) S ?D) ?D ?R :=
isDirectedRelB_graphImageB
  (evalAtGraph ? x) S ?C ?D ?Q ?R
  (hx.trans (?evalAtGraph_le_isFunctionB x))
  (fun F G y z =>
    (?evalAtGraph_apply_mono x F G y z).trans' <| by
      refine le_inf (le_inf (le_inf ?_ ?_) ?_) ?_
      * exact inf_le_left.trans (inf_le_left.trans
        (inf_le_left.trans hx))
      * exact inf_le_left.trans (inf_le_left.trans inf_le_right)
      * exact inf_le_left.trans inf_le_right
      * exact inf_le_right)

/-- An upper bound applied to a member of the set. -/
theorem isUpperBoundRelB_apply
  (x S R y : AName.{u} A) :
  isUpperBoundRelB x S R sqcap memB y S <= relB R y x :=
le_himp_iff.mp (iInf_le
  (fun z : AName A => memB z S ? relB R z x) y)

/-- A supremum is below every upper bound. -/
theorem isSupRelB_least
  (x S R y : AName.{u} A) :
  isSupRelB x S R sqcap isUpperBoundRelB y S R <= relB R x y := by
unfold isSupRelB
exact (le_himp_iff.mp (iInf_le
  (fun z : AName A =>
    isUpperBoundRelB z S R ? relB R x z) y)).trans' <|
le_inf (inf_le_left.trans inf_le_right) inf_le_right

/-- Upper bounds transport along equality of the bound. -/
theorem isUpperBoundRelB_congr
  (x x' S R : AName.{u} A) :
  eqB x x' sqcap isUpperBoundRelB x S R <= isUpperBoundRelB x' S R := by
refine le_iInf fun y => ?_
rw [le_himp_iff]
exact (relB_congr R y y x x').trans' <| by
  refine le_inf (le_inf ?_ ?_) ?_
  * exact le_top.trans (eqB_self (A := A) y).ge
  * exact inf_le_left.trans inf_le_left
  * exact (isUpperBoundRelB_apply x S R y).trans' <|
    le_inf (inf_le_left.trans inf_le_right) inf_le_right

/-- Suprema transport along equality of the realizing name. -/
theorem isSupRelB_congr
  (x x' S R : AName.{u} A) :
  eqB x x' sqcap isSupRelB x S R <= isSupRelB x' S R := by
unfold isSupRelB
refine le_inf ?_ ?_
* exact (isUpperBoundRelB_congr x x' S R).trans' <|
  le_inf inf_le_left (inf_le_right.trans inf_le_left)
* refine le_iInf fun y => ?_
rw [le_himp_iff]
exact (relB_congr R x x' y y).trans' <| by
  refine le_inf (le_inf (inf_le_left.trans inf_le_left) ?_) ?_
  * exact le_top.trans (eqB_self (A := A) y).ge

```



```

    * exact (isSupRelB_least x S R y).trans' <|
      le_inf (inf_le_left.trans inf_le_right) inf_le_right

/-- Upper bounds transport along equality of the set. -/
theorem isUpperBoundRelB_congr_set
  (x S S' R : AName.{u} A) :
  eqB S S' sqcap isUpperBoundRelB x S R <= isUpperBoundRelB x S' R := by
  refine le_iInf fun y => ?_
  rw [le_himp_iff]
  exact (isUpperBoundRelB_apply x S R y).trans' <|
    le_inf (inf_le_left.trans inf_le_right)
      ((memB_eqB_right S' y S).trans' <|
        le_inf inf_le_right (by
          rw [eqB_comm]
          exact inf_le_left.trans inf_le_left)))

/-- Suprema transport along equality of the set. -/
theorem isSupRelB_congr_set
  (x S S' R : AName.{u} A) :
  eqB S S' sqcap isSupRelB x S R <= isSupRelB x S' R := by
  unfold isSupRelB
  refine le_inf ?_ ?_
  * exact (isUpperBoundRelB_congr_set x S S' R).trans' <|
    le_inf inf_le_left (inf_le_right.trans inf_le_left)
  * refine le_iInf fun y => ?_
  rw [le_himp_iff]
  exact (isSupRelB_least x S R y).trans' <|
    le_inf (inf_le_left.trans inf_le_right)
      ((isUpperBoundRelB_congr_set y S' S R).trans' <|
        le_inf (by rw [eqB_comm]; exact inf_le_left.trans inf_le_left)
          inf_le_right)

/-- Simultaneous transport of a supremum in the realizing name and the set. -/
theorem isSupRelB_congr_pair
  (x x' S S' R : AName.{u} A) :
  eqB x x' sqcap eqB S S' sqcap isSupRelB x S R <= isSupRelB x' S' R :=
  (isSupRelB_congr x x' S' R).trans' <|
    le_inf (inf_le_left.trans inf_le_left)
      ((isSupRelB_congr_set x S S' R).trans' <|
        le_inf (inf_le_left.trans inf_le_right) inf_le_right)

/-- The dcpo existence predicate is congruent, as required by fullness. -/
theorem mem_isSupRelB_congr
  (D S R d e : AName.{u} A) :
  eqB d e sqcap (memB d D sqcap isSupRelB d S R) <=
  memB e D sqcap isSupRelB e S R :=
  le_inf
    ((memB_eqB_left d D e).trans' <|
      le_inf (inf_le_right.trans inf_le_left) inf_le_left)
    ((isSupRelB_congr d e S R).trans' <|
      le_inf inf_le_left (inf_le_right.trans inf_le_right))

/-- Canonical images transport along equality of the acting graph. -/
theorem eqB_graphImageB
  (F F' S E : AName.{u} A) :
  eqB F F' <= eqB (graphImageB F S E) (graphImageB F' S E) := by
  unfold graphImageB sepB
  refine le_eqB_mk_of_le_val (I := E.idx) E.child
  (fun i => E.val i sqcap
    bigcup x : AName.{u} A, memB x S sqcap memB (opairB x (E.child i)) F)
  (fun i => E.val i sqcap
    bigcup x : AName.{u} A, memB x S sqcap memB (opairB x (E.child i)) F')
  (eqB F F') ?_ ?_

```

```

* intro i
  refine le_inf (inf_le_right.trans inf_le_left) ?_
  refine (le_inf inf_le_left (inf_le_right.trans inf_le_right)).trans ?_
  rw [inf_iSup_eq (a := A)]
  refine iSup_le fun x => le_iSup_of_le x ?_
  refine le_inf (inf_le_right.trans inf_le_left) ?_
  exact (memB_eqB_right F (opairB x (E.child i)) F').trans' <|
    le_inf (inf_le_right.trans inf_le_right) inf_le_left
* intro i
  refine le_inf (inf_le_right.trans inf_le_left) ?_
  refine (le_inf inf_le_left (inf_le_right.trans inf_le_right)).trans ?_
  rw [inf_iSup_eq (a := A)]
  refine iSup_le fun x => le_iSup_of_le x ?_
  refine le_inf (inf_le_right.trans inf_le_left) ?_
  exact (memB_eqB_right F' (opairB x (E.child i)) F).trans' <|
    le_inf (inf_le_right.trans inf_le_right)
      (by rw [eqB_comm]; exact inf_le_left)

/-- Fixed-argument evaluation graphs transport along equality of the argument. -/
theorem InternalReflexiveModel.evalAtGraph_congr
  (? : InternalReflexiveModel (A := A))
  (x x' : AName.{u} A) :
  eqB x x' <= eqB (evalAtGraph ? x) (evalAtGraph ? x') := by
  unfold InternalReflexiveModel.evalAtGraph
  refine le_eqB_mk_of_le_val (I := ?.C.idx x ?.D.idx)
  (fun p : ?.C.idx x ?.D.idx =>
    opairB (?.C.child p.1) (?.D.child p.2))
  (fun p : ?.C.idx x ?.D.idx =>
    memB (?.C.child p.1) ?.C sqcap
    memB (opairB x (?.D.child p.2)) (?.C.child p.1))

```

Lean 4 source (lines 801–1200)

```

  (fun p : ?.C.idx x ?.D.idx =>
    memB (?.C.child p.1) ?.C sqcap
    memB (opairB x' (?.D.child p.2)) (?.C.child p.1))
  (eqB x x') ?_ ?_
* intro p
  refine le_inf (inf_le_right.trans inf_le_left) ?_
  refine (memB_opairB_congr (?.C.child p.1) x x'
    (?.D.child p.2) (?.D.child p.2)).trans' ?_
  refine le_inf (le_inf inf_le_left ?_)
    (inf_le_right.trans inf_le_right)
  exact le_top.trans (eqB_self (A := A) (?.D.child p.2)).ge
* intro p
  refine le_inf (inf_le_right.trans inf_le_left) ?_
  refine (memB_opairB_congr (?.C.child p.1) x' x
    (?.D.child p.2) (?.D.child p.2)).trans' ?_
  refine le_inf (le_inf ?_ ?_)
    (inf_le_right.trans inf_le_right)
* rw [eqB_comm]
  exact inf_le_left
* exact le_top.trans (eqB_self (A := A) (?.D.child p.2)).ge

/-- Evaluation images transport along equality of the argument. -/
theorem InternalReflexiveModel.eqB_evalAtGraph_image
  (? : InternalReflexiveModel (A := A))
  (x x' S : AName.{u} A) :
  eqB x x' <=
    eqB (graphImageB (evalAtGraph ? x) S ?D)
      (graphImageB (evalAtGraph ? x') S ?D) :=
  (eqB_graphImageB (evalAtGraph ? x) (evalAtGraph ? x') S ?D).trans'
    (?.evalAtGraph_congr x x')

```

```

/-- Antisymmetry of the internally valid order on `D`. -/
theorem InternalReflexiveModel.relR_antisymm
  (? : InternalReflexiveModel (A := A))
  (x y : AName.{u} A) :
  memB x ?.D sqcap memB y ?.D sqcap
  relB ?.R x y sqcap relB ?.R y x <=
  eqB x y := by
  have hdc := ?.dcpo_valid
  unfold isDcpoWithBottomB at hdc
  have hpo := (inf_eq_top_iff.mp (inf_eq_top_iff.mp hdc).1).1
  unfold isPartialOrderB at hpo
  have hanti := (inf_eq_top_iff.mp (inf_eq_top_iff.mp hpo).1).2
  have hx := iInf_eq_top.mp hanti x
  exact himp_eq_top_iff.mp (iInf_eq_top.mp hx y)

/-- Directed subsets of the internally valid dcpo have a supremum. -/
theorem InternalReflexiveModel.dcpo_directed_has_sup
  (? : InternalReflexiveModel (A := A))
  (S : AName.{u} A) :
  isDirectedRelB S ?.D ?.R <=
  bigcup d : AName.{u} A, memB d ?.D sqcap isSupRelB d S ?.R := by
  have hdc := ?.dcpo_valid
  unfold isDcpoWithBottomB at hdc
  exact himp_eq_top_iff.mp
  (iInf_eq_top.mp (inf_eq_top_iff.mp hdc).2 S)

/-- Suprema in a partial order are unique. -/
theorem InternalReflexiveModel.isSupRelB_unique
  (? : InternalReflexiveModel (A := A))
  (x y S : AName.{u} A) :
  memB x ?.D sqcap memB y ?.D sqcap
  isSupRelB x S ?.R sqcap isSupRelB y S ?.R <=
  eqB x y := by
  have hxy :
    isSupRelB x S ?.R sqcap isSupRelB y S ?.R <= relB ?.R x y :=
    (isSupRelB_least x S ?.R y).trans' <|
    le_inf inf_le_left (inf_le_right.trans inf_le_left)
  have hyx :
    isSupRelB x S ?.R sqcap isSupRelB y S ?.R <= relB ?.R y x :=
    (isSupRelB_least y S ?.R x).trans' <|
    le_inf inf_le_right (inf_le_left.trans inf_le_left)
  exact (?.relR_antisymm x y).trans' <| by
  refine le_inf (le_inf (le_inf ?_ ?_) ?_) ?_
  * exact inf_le_left.trans (inf_le_left.trans inf_le_left)
  * exact inf_le_left.trans (inf_le_left.trans inf_le_right)
  * exact hxy.trans' <|
    le_inf (inf_le_left.trans inf_le_right) inf_le_right
  * exact hyx.trans' <|
    le_inf (inf_le_left.trans inf_le_right) inf_le_right

/-- The graph of pointwise directed suprema of evaluation images: an edge
`D.child i, D.child j` means `D.child j` is an `R`-supremum of the
canonical image of `S` under evaluation at `D.child i`. -/
noncomputable def InternalReflexiveModel.pointwiseSupGraph
  (? : InternalReflexiveModel (A := A)) (S : AName.{u} A) :
  AName.{u} A :=
  AName.mk (?.D.idx x ?.D.idx)
  (fun p => opairB (?.D.child p.1) (?.D.child p.2))
  (fun p =>
    memB (?.D.child p.1) ?.D sqcap
    isSupRelB (?.D.child p.2)
    (graphImageB (evalAtGraph ? (?.D.child p.1)) S ?.D)
    ?.R)

```

```

/-- Graph membership implies the semantic supremum statement, with
codomain support. -/
theorem InternalReflexiveModel.memB_pointwiseSupGraph_le
  (? : InternalReflexiveModel (A := A))
  (S x y : AName.{u} A) :
  memB (opairB x y) (pointwiseSupGraph ? S) <=
    memB x ?.D sqcap memB y ?.D sqcap
    isSupRelB y (graphImageB (evalAtGraph ? x) S ?.D) ?.R := by
  unfold InternalReflexiveModel.pointwiseSupGraph
  rw [memB_mk]
  refine iSup_le fun p => ?_
  rw [eqB_opairB]
  let t :=
    (eqB x (?.D.child p.1) sqcap eqB y (?.D.child p.2)) sqcap
    (memB (?.D.child p.1) ?.D sqcap
     isSupRelB (?.D.child p.2)
     (graphImageB (evalAtGraph ? (?.D.child p.1)) S ?.D)
     ?.R)
  change t <=
    memB x ?.D sqcap memB y ?.D sqcap
    isSupRelB y (graphImageB (evalAtGraph ? x) S ?.D) ?.R
  have hxD : t <= memB x ?.D := by
    refine (memB_eqB_left (?.D.child p.1) ?.D x).trans' ?_
    refine le_inf (inf_le_right.trans inf_le_left) ?_
    rw [eqB_comm]
    exact inf_le_left.trans inf_le_left
  have hyD : t <= memB y ?.D := by
    have hj : memB (?.D.child p.2) ?.D = top := by
      rw [← oid_eps]
      exact ?.total p.2
    refine (memB_eqB_left (?.D.child p.2) ?.D y).trans' ?_
    refine le_inf (le_top.trans hj.ge) ?_
    rw [eqB_comm]
    exact inf_le_left.trans inf_le_right
  have hsup :
    t <= isSupRelB y (graphImageB (evalAtGraph ? x) S ?.D) ?.R := by
    refine (isSupRelB_congr_pair (?.D.child p.2) y
      (graphImageB (evalAtGraph ? (?.D.child p.1)) S ?.D)
      (graphImageB (evalAtGraph ? x) S ?.D)
      ?.R).trans' ?_
    refine le_inf (le_inf ?_ ?_) (inf_le_right.trans inf_le_right)
    * rw [eqB_comm]
    exact inf_le_left.trans inf_le_right
    * exact (?.eqB_evalAtGraph_image (?.D.child p.1) x S).trans'
      (by rw [eqB_comm]; exact inf_le_left.trans inf_le_left)
  exact le_inf (le_inf hxD hyD) hsup

/-- The semantic supremum statement, with source and target support, implies
graph membership. -/
theorem InternalReflexiveModel.le_memB_pointwiseSupGraph
  (? : InternalReflexiveModel (A := A))
  (S x y : AName.{u} A) :
  memB x ?.D sqcap memB y ?.D sqcap
    isSupRelB y (graphImageB (evalAtGraph ? x) S ?.D) ?.R <=
    memB (opairB x y) (pointwiseSupGraph ? S) := by
  rw [memB_eq (x := x) (y := ?.D), inf_assoc, iSup_inf_eq]
  refine iSup_le fun i => ?_
  rw [memB_eq (x := y) (y := ?.D)]
  refine (le_inf
    (le_inf inf_le_left (inf_le_right.trans inf_le_right))
    (inf_le_right.trans inf_le_left)).trans ?_
  rw [inf_iSup_eq (a := A)]

```

```

refine iSup_le fun j => ?_
let u :=
  (eqB x (?D.child i) sqcap ?D.val i) sqcap
  isSupRelB y (graphImageB (evalAtGraph ? x) S ?D) ?R sqcap
  (eqB y (?D.child j) sqcap ?D.val j)
change u <= memB (opairB x y) (pointwiseSupGraph ? S)
unfold InternalReflexiveModel.pointwiseSupGraph
rw [memB_mk]
refine le_iSup_of_le (i, j) ?_
rw [eqB_opairB]
refine le_inf (le_inf ?_ ?_) (le_inf ?_ ?_)
* exact inf_le_left.trans (inf_le_left.trans inf_le_left)
* exact inf_le_right.trans inf_le_left
* exact (val_le_memB ?D i).trans' <|
  inf_le_left.trans (inf_le_left.trans inf_le_right)
* refine (isSupRelB_congr_pair y (?D.child j)
  (graphImageB (evalAtGraph ? x) S ?D)
  (graphImageB (evalAtGraph ? (?D.child i)) S ?D)
  ?R).trans' ?_
refine le_inf (le_inf ?_ ?_) (inf_le_left.trans inf_le_right)
* exact inf_le_right.trans inf_le_left
* exact (?eqB_evalAtGraph_image x (?D.child i) S).trans' <|
  inf_le_left.trans (inf_le_left.trans inf_le_left)

/-- Exact edge/sup membership normalization at an arbitrary pair. -/
theorem InternalReflexiveModel.inf_memB_pointwiseSupGraph_eq
  (? : InternalReflexiveModel (A := A))
  (S x y : AName.{u} A) :
  memB x ?D sqcap memB y ?D sqcap
  memB (opairB x y) (pointwiseSupGraph ? S) =
  memB x ?D sqcap memB y ?D sqcap
  isSupRelB y (graphImageB (evalAtGraph ? x) S ?D) ?R := by
  apply le_antisymm
* exact le_inf
  (le_inf (inf_le_left.trans inf_le_left)
    (inf_le_left.trans inf_le_right))
  ((?.memB_pointwiseSupGraph_le S x y).trans' inf_le_right |>.trans
    inf_le_right)
* exact le_inf
  (le_inf (inf_le_left.trans inf_le_left)
    (inf_le_left.trans inf_le_right))
  (?.le_memB_pointwiseSupGraph S x y)

/-- Displayed-child form of the edge/sup membership equation. -/
theorem InternalReflexiveModel.memB_pointwiseSupGraph_child
  (? : InternalReflexiveModel (A := A)) (S : AName.{u} A)
  (i j : ?D.idx) :
  memB (opairB (?D.child i) (?D.child j))
  (pointwiseSupGraph ? S) =
  memB (?D.child i) ?D sqcap
  isSupRelB (?D.child j)
  (graphImageB (evalAtGraph ? (?D.child i)) S ?D)
  ?R := by
  apply le_antisymm
* exact (?.memB_pointwiseSupGraph_le S (?D.child i) (?D.child j)).trans <|
  le_inf (inf_le_left.trans inf_le_left) inf_le_right
* exact val_le_memB (pointwiseSupGraph ? S) (i, j)

/-- The pointwise-supremum graph is a relation on `D`. -/
theorem InternalReflexiveModel.subsetB_pointwiseSupGraph
  (? : InternalReflexiveModel (A := A)) (S : AName.{u} A) :
  subsetB (pointwiseSupGraph ? S) (prodB ?D ?D) = top := by
  unfold InternalReflexiveModel.pointwiseSupGraph

```

```

rw [subsetB_mk]
refine iInf_eq_top.mpr fun p => himp_eq_top_iff.mpr ?_
rw [memB_opairB_prodB]
refine le_inf inf_le_left ?_
have hj : memB (?.D.child p.2) ?.D = top := by
  rw [← oid_eps]
  exact ?.total p.2
exact le_top.trans hj.ge

/-- Uniqueness of displayed suprema yields single-valuedness. -/
theorem InternalReflexiveModel.pointwiseSupGraph_le_isSingleValuedB
  (? : InternalReflexiveModel (A := A)) (S : AName.{u} A) :
  isSingleValuedB (pointwiseSupGraph ? S) = top := by
  unfold isSingleValuedB
  refine iInf_eq_top.mpr fun x => iInf_eq_top.mpr fun y =>
    iInf_eq_top.mpr fun z => himp_eq_top_iff.mpr ?_
  let t :=
    memB (opairB x y) (pointwiseSupGraph ? S) sqcap
    memB (opairB x z) (pointwiseSupGraph ? S)
  change t <= eqB y z
  exact (?.isSupRelB_unique y z
    (graphImageB (evalAtGraph ? x) S ?.D)).trans' <| by
    refine le_inf (le_inf (le_inf ?_ ?_) ?_) ?_
    * exact (?.memB_pointwiseSupGraph_le S x y).trans' inf_le_left |>.trans
      (inf_le_left.trans inf_le_right)
    * exact (?.memB_pointwiseSupGraph_le S x z).trans' inf_le_right |>.trans
      (inf_le_left.trans inf_le_right)
    * exact (?.memB_pointwiseSupGraph_le S x y).trans' inf_le_left |>.trans
      inf_le_right
    * exact (?.memB_pointwiseSupGraph_le S x z).trans' inf_le_right |>.trans
      inf_le_right

/-- Directedness of `S` in `C` supplies an output index at every input of
`D`, after fullness realizes a supremum name and `memB_eq` reduces it to a
child. -/
theorem InternalReflexiveModel.pointwiseSupGraph_le_isTotalB
  (? : InternalReflexiveModel (A := A)) (S : AName.{u} A) :
  isDirectedRelB S ?.C ?.Q <=
  isTotalB (pointwiseSupGraph ? S) ?.D := by
  refine le_iInf fun x => ?_
  rw [le_himp_iff, memB_eq (x := x) (y := ?.D), inf_iSup_eq]
  refine iSup_le fun i => ?_
  have hdir_img :
    isDirectedRelB S ?.C ?.Q sqcap
    (eqB x (?.D.child i) sqcap ?.D.val i) <=
    isDirectedRelB
    (graphImageB (evalAtGraph ? (?.D.child i)) S ?.D)
    ?.D ?.R :=
    (?.evalAtGraph_image_directed (a :=
      isDirectedRelB S ?.C ?.Q sqcap
      (eqB x (?.D.child i) sqcap ?.D.val i))
      (?.D.child i) S
      ((val_le_memB ?.D i).trans' (inf_le_right.trans inf_le_right))).trans' <|
      le_inf le_rfl (inf_le_left)
  obtain <d0, hd0> := fullness
  (fun d =>
    memB d ?.D sqcap
    isSupRelB d
    (graphImageB (evalAtGraph ? (?.D.child i)) S ?.D)
    ?.R)
  (fun d e =>
    mem_isSupRelB_congr ?.D
    (graphImageB (evalAtGraph ? (?.D.child i)) S ?.D)

```

```

      ?.R d e)
have hphi :
  isDirectedRelB S ?.C ?.Q sqcap
    (eqB x (?.D.child i) sqcap ?.D.val i) <=
    memB d0 ?.D sqcap
    isSupRelB d0
      (graphImageB (evalAtGraph ? (?.D.child i)) S ?.D)
      ?.R := by
exact hdir_img.trans
((?.dcpo_directed_has_sup
  (graphImageB (evalAtGraph ? (?.D.child i)) S ?.D)).trans
  (le_of_eq hd0.symm))
have hred :
  memB d0 ?.D sqcap
  isSupRelB d0
    (graphImageB (evalAtGraph ? (?.D.child i)) S ?.D)
    ?.R <=
  bigcup j : ?.D.idx,
    (eqB d0 (?.D.child j) sqcap ?.D.val j) sqcap
    isSupRelB (?.D.child j)
      (graphImageB (evalAtGraph ? (?.D.child i)) S ?.D)
      ?.R := by
  rw [memB_eq (x := d0) (y := ?.D), iSup_inf_eq]
  refine iSup_le fun j => le_iSup_of_le j ?_
  refine le_inf inf_le_left ?_
  exact (isSupRelB_congr d0 (?.D.child j)
    (graphImageB (evalAtGraph ? (?.D.child i)) S ?.D)
    ?.R).trans' <|
  le_inf (inf_le_left.trans inf_le_left) inf_le_right
  refine (le_inf le_rfl (hphi.trans hred)).trans ?_
  rw [inf_iSup_eq]
  refine iSup_le fun j => le_iSup_of_le (?.D.child j) ?_
  let w :=
    (isDirectedRelB S ?.C ?.Q sqcap
      (eqB x (?.D.child i) sqcap ?.D.val i)) sqcap
      ((eqB d0 (?.D.child j) sqcap ?.D.val j) sqcap
        isSupRelB (?.D.child j)
          (graphImageB (evalAtGraph ? (?.D.child i)) S ?.D)
          ?.R)
  change w <=
    memB (opairB x (?.D.child j)) (pointwiseSupGraph ? S)
  unfold InternalReflexiveModel.pointwiseSupGraph
  rw [memB_mk]
  refine le_iSup_of_le (i, j) ?_
  rw [eqB_opairB, eqB_self, inf_top_eq]
  refine le_inf ?_ (le_inf ?_ ?_)
  * exact inf_le_left.trans (inf_le_right.trans inf_le_left)
  * exact (val_le_memB ?.D i).trans' <|
    inf_le_left.trans (inf_le_right.trans inf_le_right)
  * exact inf_le_right.trans inf_le_right

/-- Degree-local functionhood of the pointwise-supremum graph. -/
theorem InternalReflexiveModel.pointwiseSupGraph_le_isFunctionB
  (? : InternalReflexiveModel (A := A)) (S : AName.{u} A) :
  isDirectedRelB S ?.C ?.Q <=
    isFunctionB (pointwiseSupGraph ? S) ?.D ?.D := by
  unfold isFunctionB
  refine le_inf (le_inf ?_ ?_) ?_
  * exact le_top.trans (?.subsetB_pointwiseSupGraph S).ge
  * exact le_top.trans (?.pointwiseSupGraph_le_isSingleValuedB S).ge
  * exact ?.pointwiseSupGraph_le_isTotalB S

/-- Semantic evaluation of a map-space member is membership in the

```

```

fixed-argument slice. -/
theorem InternalReflexiveModel.le_memB_evalAtGraph
  (? : InternalReflexiveModel (A := A))
  (x F y : AName.{u} A) :
  memB F ?.C sqcap memB (opairB x y) F <=
    memB (opairB F y) (evalAtGraph ? x) := by
  have hfunF : memB F ?.C <= isFunctionB F ?.D ?.D :=
    ?.mem_mapSpace_le_function F
  have hsub : memB F ?.C <= subsetB F (prodB ?.D ?.D) :=
    hfunF.trans (inf_le_left.trans inf_le_left)
  have hyd :
    memB F ?.C sqcap memB (opairB x y) F <=
      bigcup d : ?.D.idx, memB (opairB x (?.D.child d)) F :=
    (inf_memB_opairB_le_iSup_child hsub x y).trans' <|
    le_inf inf_le_left inf_le_right
  refine (le_inf le_rfl hyd).trans ?_
  rw [inf_iSup_eq]
  refine iSup_le fun d => ?_
  let t :=
    (memB F ?.C sqcap memB (opairB x y) F) sqcap
    memB (opairB x (?.D.child d)) F
  change t <= memB (opairB F y) (evalAtGraph ? x)
  have hFd : t <=
    memB (opairB F (?.D.child d)) (evalAtGraph ? x) := by
  have hFC : t <= memB F ?.C := inf_le_left.trans inf_le_left
  have hval : t <= memB (opairB x (?.D.child d)) F := inf_le_right
  refine (le_inf hFC hval).trans ?_
  rw [memB_eq (x := F) (y := ?.C), iSup_inf_eq]
  refine iSup_le fun c => ?_
  unfold InternalReflexiveModel.evalAtGraph
  rw [memB_mk]
  refine le_iSup_of_le (c, d) ?_
  rw [eqB_opairB, eqB_self, inf_top_eq]
  let s :=
    (eqB F (?.C.child c) sqcap (?.C.val c)) sqcap
    memB (opairB x (?.D.child d)) F
  change s <=
    eqB F (?.C.child c) sqcap
    (memB (?.C.child c) ?.C sqcap
    memB (opairB x (?.D.child d)) (?.C.child c))
  refine le_inf (inf_le_left.trans inf_le_left) (le_inf ?_ ?_)
  * exact (val_le_memB ?.C c).trans' (inf_le_left.trans inf_le_right)
  * exact (memB_eqB_right F (opairB x (?.D.child d))
    (?.C.child c)).trans' <|
    le_inf inf_le_right (inf_le_left.trans inf_le_left)
  have hyeq : t <= eqB y (?.D.child d) :=
    (isSingleValuedB_apply F x y (?.D.child d)).trans' <|
    le_inf (le_inf
      ((inf_le_left.trans inf_le_left).trans
      (hfunF.trans (inf_le_left.trans inf_le_right)))
      (inf_le_left.trans inf_le_right))
    inf_le_right
  exact (memB_opairB_congr (evalAtGraph ? x) F F
    (?.D.child d) y).trans' <|

```

Lean 4 source (lines 1201–1600)

```

le_inf (le_inf
  (le_top.trans (eqB_self (A := A) F).ge)
  (by rw [eqB_comm]; exact hyeq))
hFd

```

```

/-- The pointwise-supremum graph is monotone: a larger argument yields a
larger directed-evaluation supremum. -/

```



```

theorem InternalReflexiveModel.pointwiseSupGraph_apply_mono
  (? : InternalReflexiveModel (A := A)) (S : AName.{u} A)
  (x x' y y' : AName.{u} A) :
  isDirectedRelB S ?.C ?.Q sqcap
    memB (opairB x y) (pointwiseSupGraph ? S) sqcap
    memB (opairB x' y') (pointwiseSupGraph ? S) sqcap
    relB ?.R x x' <=
    relB ?.R y y' := by
  let t :=
    isDirectedRelB S ?.C ?.Q sqcap
    memB (opairB x y) (pointwiseSupGraph ? S) sqcap
    memB (opairB x' y') (pointwiseSupGraph ? S) sqcap
    relB ?.R x x'
  change t <= relB ?.R y y'
  have htDir : t <= isDirectedRelB S ?.C ?.Q :=
    inf_le_left.trans (inf_le_left.trans inf_le_left)
  have htxy : t <= memB (opairB x y) (pointwiseSupGraph ? S) :=
    inf_le_left.trans (inf_le_left.trans inf_le_right)
  have htx'y' : t <= memB (opairB x' y') (pointwiseSupGraph ? S) :=
    inf_le_left.trans inf_le_right
  have htR : t <= relB ?.R x x' := inf_le_right
  have hxy := (? .memB_pointwiseSupGraph_le S x y).trans' htxy
  have hx'y' := (? .memB_pointwiseSupGraph_le S x' y').trans' htx'y'
  have hx'D : t <= memB x' ?.D :=
    hx'y'.trans (inf_le_left.trans inf_le_left)
  have hsupy : t <=
    isSupRelB y (graphImageB (evalAtGraph ? x) S ?.D) ?.R :=
    hxy.trans inf_le_right
  have hsupy' : t <=
    isSupRelB y' (graphImageB (evalAtGraph ? x') S ?.D) ?.R :=
    hx'y'.trans inf_le_right
  have hSsub : isDirectedRelB S ?.C ?.Q <= subsetB S ?.C := by
    unfold isDirectedRelB
    exact inf_le_left.trans inf_le_left
  have hupper : t <= isUpperBoundRelB y'
    (graphImageB (evalAtGraph ? x) S ?.D) ?.R := by
    refine le_iInf fun z => ?_
    rw [le_himp_iff, memB_graphImageB, <- inf_assoc, inf_iSup_eq]
    refine iSup_le fun F => ?_
  let s :=
    (t sqcap memB z ?.D) sqcap
    (memB F S sqcap memB (opairB F z) (evalAtGraph ? x))
  change s <= relB ?.R z y'
  have hST : s <= t := inf_le_left.trans inf_le_left
  have hFS : s <= memB F S := inf_le_right.trans inf_le_left
  have hFz : s <= memB (opairB F z) (evalAtGraph ? x) :=
    inf_le_right.trans inf_le_right
  have hFC : s <= memB F ?.C :=
    (memB_of_subsetB F S ?.C).trans' <|
    le_inf hFS (hST.trans htDir |>.trans hSsub)
  have hxz : s <= memB (opairB x z) F :=
    (? .memB_evalAtGraph_le x F z).trans' hFz |>.trans inf_le_right
  have htot :
    s <= bigcup w : AName A,
    memB (opairB F w) (evalAtGraph ? x') :=
    (isTotalB_apply (evalAtGraph ? x') ?.C F).trans' <|
    le_inf
    ((hST.trans hx'D).trans (? .evalAtGraph_le_isFunctionB x') |>.trans
    inf_le_right)
    hFC
  refine (le_inf le_rfl htot).trans ?_
  rw [inf_iSup_eq]
  refine iSup_le fun w => ?_

```

```

let sw := s sqcap memB (opairB F w) (evalAtGraph ? x')
change sw <= relB ?R z y'
have hswT : sw <= t := inf_le_left.trans hST
have hFw : sw <= memB (opairB F w) (evalAtGraph ? x') := inf_le_right
have hx'w : sw <= memB (opairB x' w) F :=
  (?memB_evalAtGraph_le x' F w).trans' hFw |>.trans inf_le_right
have hzw : sw <= relB ?R z w :=
  (?mem_mapSpace_apply_mono F x x' z w).trans' <| by
    refine le_inf (le_inf (le_inf ?_ ?_) ?_) ?_
    * exact inf_le_left.trans hFC
    * exact inf_le_left.trans hxz
    * exact hx'w
    * exact hswT.trans htr
have hwD : sw <= memB w ?D :=
  (local_function_edge_le_codomain
    ((hswT.trans hx'D).trans (?evalAtGraph_le_isFunctionB x'))
    F w).trans' <|
  le_inf le_rfl hFw
have hwImage : sw <=
  memB w (graphImageB (evalAtGraph ? x') S ?D) := by
  rw [memB_graphImageB]
  refine le_inf hwD (le_iSup_of_le F ?_)
  exact le_inf (inf_le_left.trans hFS) hFw
have hwy' : sw <= relB ?R w y' :=
  (isUpperBoundRelB_apply y'
    (graphImageB (evalAtGraph ? x') S ?D) ?R w).trans' <|
  le_inf (hswT.trans hsupy' |>.trans inf_le_left) hwImage
exact (?relR_trans z w y').trans' (le_inf hzw hwy')
exact (isSupRelB_least y
  (graphImageB (evalAtGraph ? x) S ?D) ?R y').trans' <|
  le_inf hsupy hupper

/-- Directed-supremum preservation for the pointwise-supremum graph. -/
theorem InternalReflexiveModel.pointwiseSupGraph_mapsToSup
  (? : InternalReflexiveModel (A := A))
  (S T x y : AName.{u} A) :
  isDirectedRelB S ?C ?Q sqcap
  isDirectedRelB T ?D ?R sqcap
  isSupRelB x T ?R sqcap
  memB (opairB x y) (pointwiseSupGraph ? S) <=
  mapsToSupB (pointwiseSupGraph ? S) T y ?R := by
  unfold mapsToSupB
  refine le_inf ?_ ?_
  * refine le_iInf fun w => le_iInf fun z => ?_
  rw [le_himp_iff]
  let t :=
    (isDirectedRelB S ?C ?Q sqcap
      isDirectedRelB T ?D ?R sqcap
      isSupRelB x T ?R sqcap
      memB (opairB x y) (pointwiseSupGraph ? S)) sqcap
    (memB w T sqcap memB (opairB w z) (pointwiseSupGraph ? S))
  change t <= relB ?R z y
  have hwX : t <= relB ?R w x :=
    (isUpperBoundRelB_apply x T ?R w).trans' <|
    le_inf
      (inf_le_left.trans (inf_le_left.trans inf_le_right) |>.trans
        inf_le_left)
      (inf_le_right.trans inf_le_left)
  exact (?pointwiseSupGraph_apply_mono S w x z y).trans' <|
  le_inf (le_inf (le_inf
    (inf_le_left.trans (inf_le_left.trans
      (inf_le_left.trans inf_le_left)))
    (inf_le_right.trans inf_le_right))

```

```

      (inf_le_left.trans inf_le_right))
    hwx
* refine le_iInf fun u => ?_
rw [le_himp_iff]
let upper :=
  ? w : AName A, ? z : AName A,
  memB w T sqcap memB (opairB w z) (pointwiseSupGraph ? S) ?
  relB ?R z u
let t :=
  (isDirectedRelB S ?C ?Q sqcap
   isDirectedRelB T ?D ?R sqcap
   isSupRelB x T ?R sqcap
   memB (opairB x y) (pointwiseSupGraph ? S)) sqcap upper
change t <= relB ?R y u
have htS : t <= isDirectedRelB S ?C ?Q :=
  inf_le_left.trans (inf_le_left.trans
    (inf_le_left.trans inf_le_left))
have htT : t <= isDirectedRelB T ?D ?R :=
  inf_le_left.trans (inf_le_left.trans
    (inf_le_left.trans inf_le_right))
have htx : t <= isSupRelB x T ?R :=
  inf_le_left.trans (inf_le_left.trans inf_le_right)
have htxy : t <= memB (opairB x y) (pointwiseSupGraph ? S) :=
  inf_le_left.trans inf_le_right
have htUpper : t <= upper := inf_le_right
have hSsub : isDirectedRelB S ?C ?Q <= subsetB S ?C := by
  unfold isDirectedRelB
  exact inf_le_left.trans inf_le_left
have hTsub : isDirectedRelB T ?D ?R <= subsetB T ?D := by
  unfold isDirectedRelB
  exact inf_le_left.trans inf_le_left
have hsupy : t <=
  isSupRelB y (graphImageB (evalAtGraph ? x) S ?D) ?R :=
  (?memB_pointwiseSupGraph_le S x y).trans' htxy |>.trans inf_le_right
have hupperu : t <= isUpperBoundRelB u
  (graphImageB (evalAtGraph ? x) S ?D) ?R := by
  refine le_iInf fun v => ?_
  rw [le_himp_iff, memB_graphImageB, <- inf_assoc, inf_iSup_eq]
  refine iSup_le fun F => ?_
  let s :=
    (t sqcap memB v ?D) sqcap
    (memB F S sqcap memB (opairB F v) (evalAtGraph ? x))
  change s <= relB ?R v u
  have hsT : s <= t := inf_le_left.trans inf_le_left
  have hFS : s <= memB F S := inf_le_right.trans inf_le_left
  have hFv : s <= memB (opairB F v) (evalAtGraph ? x) :=
    inf_le_right.trans inf_le_right
  have hFC : s <= memB F ?C :=
    (memB_of_subsetB F S ?C).trans' <|
    le_inf hFS (hsT.trans htS |>.trans hSsub)
  have hxv : s <= memB (opairB x v) F :=
    (?memB_evalAtGraph_le x F v).trans' hFv |>.trans inf_le_right
  have hcont : s <= isScottContinuousB F ?D ?D ?R ?R :=
    (?mem_mapSpace_le_scottContinuous F).trans' hFC
  have hvsup : s <=
    isSupRelB v (graphImageB F T ?D) ?R :=
    ((scottContinuous_image_sup (hF := hcont)
      F T ?D ?D ?R ?R x v).trans inf_le_right).trans' <|
    le_inf (le_inf (le_inf le_rfl (hsT.trans htT))
      (hsT.trans htx)) hxv
  have huF : s <= isUpperBoundRelB u (graphImageB F T ?D) ?R := by
  refine le_iInf fun p => ?_
  rw [le_himp_iff, memB_graphImageB, <- inf_assoc, inf_iSup_eq]

```

```

refine iSup_le fun w => ?_
let sp :=
  (s sqcap memB p ?.D) sqcap
  (memB w T sqcap memB (opairB w p) F)
change sp <= relB ?.R p u
have hspS : sp <= s := inf_le_left.trans inf_le_left
have hpD : sp <= memB p ?.D := inf_le_left.trans inf_le_right
have hwT : sp <= memB w T := inf_le_right.trans inf_le_left
have hwp : sp <= memB (opairB w p) F :=
  inf_le_right.trans inf_le_right
have hwd : sp <= memB w ?.D :=
  (memB_of_subsetB w T ?.D).trans' <|
  le_inf hwT (hspS.trans hsT |>.trans htT |>.trans hTsub)
have htot : sp <=
  bigcup z : AName A,
  memB (opairB w z) (pointwiseSupGraph ? S) :=
  (isTotalB_apply (pointwiseSupGraph ? S) ?.D w).trans' <|
  le_inf
  ((hspS.trans hsT |>.trans htS).trans
   (? .pointwiseSupGraph_le_isTotalB S))
  hwd
refine (le_inf le_rfl htot).trans ?_
rw [inf_iSup_eq]
refine iSup_le fun z => ?_
let sz :=
  sp sqcap memB (opairB w z) (pointwiseSupGraph ? S)
change sz <= relB ?.R p u
have hszsp : sz <= sp := inf_le_left
have hzw : sz <= memB (opairB w z) (pointwiseSupGraph ? S) :=
  inf_le_right
have hpEval : sz <= memB (opairB F p) (evalAtGraph ? w) :=
  (? .le_memB_evalAtGraph w F p).trans' <|
  le_inf (hszsp.trans hspS |>.trans hFC)
  (hszsp.trans hwp)
have hpImage : sz <=
  memB p (graphImageB (evalAtGraph ? w) S ?.D) := by
  rw [memB_graphImageB]
  refine le_inf (hszsp.trans hpD) (le_iSup_of_le F ?_)
  exact le_inf (hszsp.trans hspS |>.trans hFS) hpEval
have hpz : sz <= relB ?.R p z :=
  (isUpperBoundRelB_apply z
   (graphImageB (evalAtGraph ? w) S ?.D) ?.R p).trans' <|
  le_inf
  ((? .memB_pointwiseSupGraph_le S w z).trans' hzw |>.trans
   (inf_le_right.trans inf_le_left))
  hpImage
have hzu : sz <= relB ?.R z u := by
  have hu := iInf_le
    (fun w' : AName A => ? z' : AName A,
     memB w' T sqcap memB (opairB w' z') (pointwiseSupGraph ? S) ?
     relB ?.R z' u) w
  have hz := (iInf_le
    (fun z' : AName A =>
      memB w T sqcap memB (opairB w z') (pointwiseSupGraph ? S) ?
      relB ?.R z' u) z).trans' hu
  exact (le_himp_iff.mp hz).trans' <|
  le_inf (hszsp.trans hspS |>.trans hsT |>.trans htUpper)
  (le_inf (hszsp.trans hwT) hzw)
  exact (? .relR_trans p z u).trans' (le_inf hpz hzu)
exact (isSupRelB_least v (graphImageB F T ?.D) ?.R u).trans' <|
  le_inf hvsup huF
exact (isSupRelB_least y
  (graphImageB (evalAtGraph ? x) S ?.D) ?.R u).trans' <|

```

```

le_inf hsupy hupperu

/-- Degree-local Scott continuity of the pointwise-supremum graph as a
self-map of `D`. -/
theorem InternalReflexiveModel.pointwiseSupGraph_le_isScottContinuousB
  (? : InternalReflexiveModel (A := A)) (S : AName.{u} A) :
  isDirectedRelB S ?.C ?.Q <=
    isScottContinuousB (pointwiseSupGraph ? S) ?.D ?.D ?.R ?.R := by
  unfold isScottContinuousB
  refine le_inf (le_inf ?_ ?_) ?_
  * exact ?.pointwiseSupGraph_le_isFunctionB S
  * refine le_iInf fun x => le_iInf fun x' =>
    le_iInf fun y => le_iInf fun y' => ?_
  rw [le_himp_iff]
  exact (?.pointwiseSupGraph_apply_mono S x x' y y').trans' <| by
    apply le_of_eq
    ac_rfl
  * refine le_iInf fun T => le_iInf fun x => le_iInf fun y => ?_
  rw [le_himp_iff]
  exact (?.pointwiseSupGraph_mapsToSup S T x y).trans' <| by
    apply le_of_eq
    ac_rfl

/-- Directed `S` subseqeq `D` projects to Boolean inclusion. -/
theorem isDirectedRelB_subset
  (S D R : AName.{u} A) :
  isDirectedRelB S D R <= subsetB S D := by
  unfold isDirectedRelB
  exact inf_le_left.trans inf_le_left

/-- Directed `S` is internally nonempty. -/
theorem isDirectedRelB_nonempty
  (S D R : AName.{u} A) :
  isDirectedRelB S D R <= bigcup x : AName A, memB x S := by
  unfold isDirectedRelB
  exact inf_le_left.trans inf_le_right

/-- At the degree of a relation contained in a product, membership of an
arbitrary name reduces to the displayed pair matrix. -/
theorem inf_memB_le_iSup_matrix {a : A} {F X Y : AName.{u} A}
  (hsub : a <= subsetB F (prodB X Y)) (w : AName.{u} A) :
  a sqcap memB w F <=
    bigcup p : X.idx x Y.idx,
    eqB w (opairB (X.child p.1) (Y.child p.2)) sqcap
    memB (opairB (X.child p.1) (Y.child p.2)) F := by
  have hw : a sqcap memB w F <= memB w (prodB X Y) :=
    (memB_of_subsetB w F (prodB X Y)).trans' <|
    le_inf inf_le_right (inf_le_left.trans hsub)
  have hprod :
    memB w (prodB X Y) =
      bigcup p : X.idx x Y.idx,
      eqB w (opairB (X.child p.1) (Y.child p.2)) sqcap
      (memB (X.child p.1) X sqcap memB (Y.child p.2) Y) := by
  rw [memB_eq]
  unfold prodB
  rfl
  refine (le_inf le_rfl hw).trans ?_
  rw [hprod, inf_iSup_eq]
  refine iSup_le fun p => le_iSup_of_le p ?_
  refine le_inf (inf_le_right.trans inf_le_left) ?_
  exact (memB_eqB_left w F
    (opairB (X.child p.1) (Y.child p.2))).trans' <|
    le_inf (inf_le_left.trans inf_le_right)

```

```

      (inf_le_right.trans inf_le_left)

/-- Graph inclusion from agreeing on every displayed pair, at the degree
where the source is a relation on `X x Y`. -/
theorem subsetB_of_same_pairs {a : A} {F G X Y : AName.{u} A}
  (hsub : a <= subsetB F (prodB X Y))
  (hsame : forall x y : AName.{u} A,
    a sqcap memB x X sqcap memB (opairB x y) F <=
      memB (opairB x y) G) :
  a <= subsetB F G := by
  rw [subsetB_eq_iInf]
  refine le_iInf fun w => ?_
  rw [le_himp_iff]
  refine (le_inf inf_le_left (inf_memB_le_iSup_matrix hsub w)).trans ?_
  rw [inf_iSup_eq]
  refine iSup_le fun p => ?_
  let pair := opairB (X.child p.1) (Y.child p.2)
  change a sqcap (eqB w pair sqcap memB pair F) <= memB w G
  have hx : a sqcap memB pair F <= memB (X.child p.1) X := by
    have h := (memB_of_subsetB pair F (prodB X Y)).trans' <|
      le_inf inf_le_right (inf_le_left.trans hsub)
    rw [memB_opairB_prodB] at h
    exact h.trans inf_le_left
  have hG : a sqcap memB pair F <= memB pair G :=
    (hsame (X.child p.1) (Y.child p.2)).trans' <|
      le_inf (le_inf inf_le_left hx) inf_le_right
  exact (memB_eqB_left' pair G w).trans' <|
    le_inf (inf_le_right.trans inf_le_left)
      (hG.trans' <|
        le_inf inf_le_left (inf_le_right.trans inf_le_right))

/-- Mutual `Q`-comparison of members of `C` equates their values at a
common argument. -/
theorem InternalReflexiveModel.relQ_antisymm_apply
  (? : InternalReflexiveModel (A := A))
  (F G x y z : AName.{u} A) :
  memB F ?.C sqcap memB G ?.C sqcap
    relB ?.Q F G sqcap relB ?.Q G F sqcap
    memB x ?.D sqcap memB (opairB x y) F sqcap
    memB (opairB x z) G <=
    eqB y z := by
  let t :=
    memB F ?.C sqcap memB G ?.C sqcap
    relB ?.Q F G sqcap relB ?.Q G F sqcap
    memB x ?.D sqcap memB (opairB x y) F sqcap
    memB (opairB x z) G
  change t <= eqB y z
  have hF : t <= memB F ?.C :=
    inf_le_left.trans (inf_le_left.trans
      (inf_le_left.trans (inf_le_left.trans
        (inf_le_left.trans inf_le_left))))
  have hG : t <= memB G ?.C :=
    inf_le_left.trans (inf_le_left.trans
      (inf_le_left.trans (inf_le_left.trans
        (inf_le_left.trans inf_le_right))))
  have hFG : t <= relB ?.Q F G :=
    inf_le_left.trans (inf_le_left.trans
      (inf_le_left.trans (inf_le_left.trans inf_le_right)))
  have hGF : t <= relB ?.Q G F :=
    inf_le_left.trans (inf_le_left.trans
      (inf_le_left.trans inf_le_right))
  have hx : t <= memB x ?.D :=
    inf_le_left.trans (inf_le_left.trans inf_le_right)

```

```

have hFy : t <= memB (opairB x y) F :=
  inf_le_left.trans inf_le_right
have hGz : t <= memB (opairB x z) G :=
  inf_le_right
have hyD : t <= memB y ?.D :=
  (local_function_edge_le_codomain
    (hF.trans (?.mem_mapSpace_le_function F)) x y).trans' <|
    le_inf le_rfl hFy
have hzD : t <= memB z ?.D :=
  (local_function_edge_le_codomain
    (hG.trans (?.mem_mapSpace_le_function G)) x z).trans' <|
    le_inf le_rfl hGz
have hRyz : t <= relB ?.R y z :=
  (?.relQ_apply F G x y z).trans' <|
    le_inf (le_inf (le_inf hF hG) hFG)

```

Lean 4 source (lines 1601–2000)

```

      (le_inf (le_inf hx hFy) hGz)
have hRzy : t <= relB ?.R z y :=
  (?.relQ_apply G F x z y).trans' <|
    le_inf (le_inf (le_inf hG hF) hGF)
    (le_inf (le_inf hx hGz) hFy)
exact (?.relR_antisymm y z).trans' <|
  le_inf (le_inf (le_inf hyD hzD) hRyz) hRzy

/-- Antisymmetry of `Q` on members of `C`, from the pointwise order and
function uniqueness. -/
theorem InternalReflexiveModel.relQ_antisymm
  (? : InternalReflexiveModel (A := A))
  (F G : AName.{u} A) :
  memB F ?.C sqcap memB G ?.C sqcap
  relB ?.Q F G sqcap relB ?.Q G F <=
  eqB F G := by
  let t :=
    memB F ?.C sqcap memB G ?.C sqcap
    relB ?.Q F G sqcap relB ?.Q G F
  change t <= eqB F G
  have hF : t <= memB F ?.C :=
    inf_le_left.trans (inf_le_left.trans inf_le_left)
  have hG : t <= memB G ?.C :=
    inf_le_left.trans (inf_le_left.trans inf_le_right)
  have hFG : t <= relB ?.Q F G :=
    inf_le_left.trans inf_le_right
  have hGF : t <= relB ?.Q G F :=
    inf_le_right
  have hfunF : t <= isFunctionB F ?.D ?.D :=
    (?.mem_mapSpace_le_function F).trans' hF
  have hfunG : t <= isFunctionB G ?.D ?.D :=
    (?.mem_mapSpace_le_function G).trans' hG
  have hsubF : t <= subsetB F (prodB ?.D ?.D) :=
    hfunF.trans (inf_le_left.trans inf_le_left)
  have hsubG : t <= subsetB G (prodB ?.D ?.D) :=
    hfunG.trans (inf_le_left.trans inf_le_left)
  have hsameFG (x y : AName.{u} A) :
    t sqcap memB x ?.D sqcap memB (opairB x y) F <=
    memB (opairB x y) G := by
  have htot :
    t sqcap memB x ?.D sqcap memB (opairB x y) F <=
    bigcup z : AName A, memB (opairB x z) G :=
    (isTotalB_apply G ?.D x).trans' <|
      le_inf
      ((inf_le_left.trans (inf_le_left.trans hfunG)).trans
        inf_le_right)

```

```

      (inf_le_left.trans inf_le_right)
refine (le_inf le_rfl htot).trans ?_
rw [inf_iSup_eq]
refine iSup_le fun z => ?_
let s :=
  (t sqcap memB x ?.D sqcap memB (opairB x y) F) sqcap
  memB (opairB x z) G
change s <= memB (opairB x y) G
have hsT : s <= t :=
  inf_le_left.trans (inf_le_left.trans inf_le_left)
have hsx : s <= memB x ?.D :=
  inf_le_left.trans (inf_le_left.trans inf_le_right)
have hsFy : s <= memB (opairB x y) F :=
  inf_le_left.trans inf_le_right
have hsGz : s <= memB (opairB x z) G :=
  inf_le_right
have hyz : s <= eqB y z :=
  (?.relQ_antisymm_apply F G x y z).trans' <|
  le_inf (le_inf (le_inf (le_inf (le_inf (le_inf
    (hsT.trans hF) (hsT.trans hG)) (hsT.trans hFG))
    (hsT.trans hGF)) hsx) hsFy) hsGz
exact (memB_opairB_congr G x x z y).trans' <|
  le_inf (le_inf
    (le_top.trans (eqB_self (A := A) x).ge)
    (by rw [eqB_comm]; exact hyz))
  hsGz
have hsameGF (x y : AName.{u} A) :
  t sqcap memB x ?.D sqcap memB (opairB x y) G <=
  memB (opairB x y) F := by
  have htot :
    t sqcap memB x ?.D sqcap memB (opairB x y) G <=
    bigcup z : AName A, memB (opairB x z) F :=
    (isTotalB_apply F ?.D x).trans' <|
    le_inf
      ((inf_le_left.trans (inf_le_left.trans hfunF)).trans
        inf_le_right)
      (inf_le_left.trans inf_le_right)
  refine (le_inf le_rfl htot).trans ?_
  rw [inf_iSup_eq]
  refine iSup_le fun z => ?_
  let s :=
    (t sqcap memB x ?.D sqcap memB (opairB x y) G) sqcap
    memB (opairB x z) F
  change s <= memB (opairB x y) F
  have hsT : s <= t :=
    inf_le_left.trans (inf_le_left.trans inf_le_left)
  have hsx : s <= memB x ?.D :=
    inf_le_left.trans (inf_le_left.trans inf_le_right)
  have hsGy : s <= memB (opairB x y) G :=
    inf_le_left.trans inf_le_right
  have hsFz : s <= memB (opairB x z) F :=
    inf_le_right
  have hyz : s <= eqB y z :=
    (?.relQ_antisymm_apply G F x y z).trans' <|
    le_inf (le_inf (le_inf (le_inf (le_inf
      (hsT.trans hG) (hsT.trans hF)) (hsT.trans hGF))
      (hsT.trans hFG)) hsx) hsGy) hsFz
  exact (memB_opairB_congr F x x z y).trans' <|
    le_inf (le_inf
      (le_top.trans (eqB_self (A := A) x).ge)
      (by rw [eqB_comm]; exact hyz))
    hsFz
  rw [eqB_eq_subset]

```



```

exact le_inf
  (subsetB_of_same_pairs hsubF hsameFG)
  (subsetB_of_same_pairs hsubG hsameGF)

/-- Scott continuity of the pointwise-supremum graph places it in `C`. -/
theorem InternalReflexiveModel.pointwiseSupGraph_le_mem_mapSpace
  (? : InternalReflexiveModel (A := A)) (S : AName.{u} A) :
  isDirectedRelB S ?.C ?.Q <=
    memB (pointwiseSupGraph ? S) ?.C :=
  (? .scottContinuous_le_mem_mapSpace (pointwiseSupGraph ? S)).trans'
  (? .pointwiseSupGraph_le_isScottContinuousB S)

/-- The internal order `Q` is a relation on `C`. -/
theorem InternalReflexiveModel.subsetB_Q
  (? : InternalReflexiveModel (A := A)) :
  subsetB ?.Q (prodB ?.C ?.C) = top := by
  have hpo := ?.pointwise_valid
  unfold isPointwiseOrderB at hpo
  exact (inf_eq_top_iff.mp hpo).1

/-- A `Q`-related pair consists of members of `C` itself -/
theorem InternalReflexiveModel.relQ_le_mem_mapSpace
  (? : InternalReflexiveModel (A := A))
  (F G : AName.{u} A) :
  relB ?.Q F G <= memB F ?.C sqcap memB G ?.C := by
  have h := (memB_of_subsetB (opairB F G) ?.Q (prodB ?.C ?.C)).trans' <|
  le_inf le_rfl (le_top.trans (? .subsetB_Q).ge)
  rw [memB_opairB_prodB] at h
  exact h

/-- A `Q`-upper bound of a nonempty family of members of `C` itself
belongs to `C`. -/
theorem InternalReflexiveModel.isUpperBoundRelB_le_mem_mapSpace
  (? : InternalReflexiveModel (A := A))
  (F S : AName.{u} A) :
  (bigcup G : AName A, memB G S) sqcap isUpperBoundRelB F S ?.Q <=
    memB F ?.C := by
  rw [inf_comm, inf_iSup_eq]
  refine iSup_le fun G => ?_
  have hQG :
    isUpperBoundRelB F S ?.Q sqcap memB G S <= relB ?.Q G F :=
    isUpperBoundRelB_apply F S ?.Q G
  exact (? .relQ_le_mem_mapSpace G F).trans' hQG |>.trans inf_le_right

/-- Every member of directed `S` subseq `C` is `Q`-below the pointwise-supremum
graph, because each value `G(x)` lies in the eval-image whose `R`-supremum
is the pointwise-sup output. -/
theorem InternalReflexiveModel.pointwiseSupGraph_upper_apply
  (? : InternalReflexiveModel (A := A))
  (S G : AName.{u} A) :
  isDirectedRelB S ?.C ?.Q sqcap memB G S <=
    relB ?.Q G (pointwiseSupGraph ? S) := by
  let t := isDirectedRelB S ?.C ?.Q sqcap memB G S
  change t <= relB ?.Q G (pointwiseSupGraph ? S)
  have htDir : t <= isDirectedRelB S ?.C ?.Q := inf_le_left
  have htG : t <= memB G S := inf_le_right
  have hGC : t <= memB G ?.C :=
    (memB_of_subsetB G S ?.C).trans' <|
    le_inf htG (htDir.trans (isDirectedRelB_subset S ?.C ?.Q))
  have hsupC : t <= memB (pointwiseSupGraph ? S) ?.C :=
    (? .pointwiseSupGraph_le_mem_mapSpace S).trans' htDir
  have hpw : t <=
    pointwiseLeB G (pointwiseSupGraph ? S) ?.D ?.R := by

```

```

unfold pointwiseLeB
refine le_iInf fun x => le_iInf fun y => le_iInf fun z => ?_
rw [le_himp_iff]
let s :=
  t sqcap (memB x ?.D sqcap memB (opairB x y) G sqcap
    memB (opairB x z) (pointwiseSupGraph ? S))
change s <= relB ?.R y z
have hsT : s <= t := inf_le_left
have hxD : s <= memB x ?.D :=
  inf_le_right.trans (inf_le_left.trans inf_le_left)
have hxy : s <= memB (opairB x y) G :=
  inf_le_right.trans (inf_le_left.trans inf_le_right)
have hxz : s <=
  memB (opairB x z) (pointwiseSupGraph ? S) :=
  inf_le_right.trans inf_le_right
have hyD : s <= memB y ?.D :=
  (local_function_edge_le_codomain
    ((hsT.trans hGC).trans (?.mem_mapSpace_le_function G))
    x y).trans' <|
  le_inf le_rfl hxy
have hyEval : s <= memB (opairB G y) (evalAtGraph ? x) :=
  (?.le_memB_evalAtGraph x G y).trans' <|
  le_inf (hsT.trans hGC) hxy
have hyImage : s <=
  memB y (graphImageB (evalAtGraph ? x) S ?.D) := by
  rw [memB_graphImageB]
  refine le_inf hyD (le_iSup_of_le G ?_)
  exact le_inf (hsT.trans htG) hyEval
have hsupz : s <=
  isSupRelB z (graphImageB (evalAtGraph ? x) S ?.D) ?.R :=
  (?.memB_pointwiseSupGraph_le S x z).trans' hxz |>.trans
  inf_le_right
exact (isUpperBoundRelB_apply z
  (graphImageB (evalAtGraph ? x) S ?.D) ?.R y).trans' <|
  le_inf (hsupz.trans inf_le_left) hyImage
exact (?.pointwise_le_relQ G (pointwiseSupGraph ? S)).trans' <|
  le_inf (le_inf hGC hsupC) hpw

/-- If `F` is a `Q`-upper bound of directed `S`, then the pointwise-supremum
graph is `Q`-below `F` : each `G(x) <= F(x)`, so the eval-image `R`-supremum
is `<= F(x)`. -/
theorem InternalReflexiveModel.pointwiseSupGraph_least_apply
  (? : InternalReflexiveModel (A := A))
  (S F : AName.{u} A) :
  isDirectedRelB S ?.C ?.Q sqcap isUpperBoundRelB F S ?.Q <=
    relB ?.Q (pointwiseSupGraph ? S) F := by
  let t :=
    isDirectedRelB S ?.C ?.Q sqcap isUpperBoundRelB F S ?.Q
  change t <= relB ?.Q (pointwiseSupGraph ? S) F
  have htDir : t <= isDirectedRelB S ?.C ?.Q := inf_le_left
  have htUpper : t <= isUpperBoundRelB F S ?.Q := inf_le_right
  have hFC : t <= memB F ?.C :=
    (?.isUpperBoundRelB_le_mem_mapSpace F S).trans' <|
    le_inf (htDir.trans (isDirectedRelB_nonempty S ?.C ?.Q))
    htUpper
  have hsupC : t <= memB (pointwiseSupGraph ? S) ?.C :=
    (?.pointwiseSupGraph_le_mem_mapSpace S).trans' htDir
  have hpw : t <=
    pointwiseLeB (pointwiseSupGraph ? S) F ?.D ?.R := by
    unfold pointwiseLeB
    refine le_iInf fun x => le_iInf fun y => le_iInf fun z => ?_
    rw [le_himp_iff]
    let s :=

```

```

    t sqcap (memB x ?.D sqcap
      memB (opairB x y) (pointwiseSupGraph ? S) sqcap
      memB (opairB x z) F)
  change s <= relB ?.R y z
  have hsT : s <= t := inf_le_left
  have hxD : s <= memB x ?.D :=
    inf_le_right.trans (inf_le_left.trans inf_le_left)
  have hxy : s <=
    memB (opairB x y) (pointwiseSupGraph ? S) :=
    inf_le_right.trans (inf_le_left.trans inf_le_right)
  have hxz : s <= memB (opairB x z) F :=
    inf_le_right.trans inf_le_right
  have hsupy : s <=
    isSupRelB y (graphImageB (evalAtGraph ? x) S ?.D) ?.R :=
    (?.memB_pointwiseSupGraph_le S x y).trans' hxy |>.trans
    inf_le_right
  have hupperz : s <= isUpperBoundRelB z
    (graphImageB (evalAtGraph ? x) S ?.D) ?.R := by
    refine le_iInf fun v => ?_
    rw [le_himp_iff, memB_graphImageB, <- inf_assoc, inf_iSup_eq]
    refine iSup_le fun G => ?_
    let u :=
      (s sqcap memB v ?.D) sqcap
      (memB G S sqcap memB (opairB G v) (evalAtGraph ? x))
    change u <= relB ?.R v z
    have huS : u <= s := inf_le_left.trans inf_le_left
    have hGS : u <= memB G S := inf_le_right.trans inf_le_left
    have hGv : u <= memB (opairB G v) (evalAtGraph ? x) :=
      inf_le_right.trans inf_le_right
    have hGC : u <= memB G ?.C :=
      (memB_of_subsetB G S ?.C).trans' <|
      le_inf hGS (huS.trans hsT |>.trans htDir |>.trans
        (isDirectedRelB_subset S ?.C ?.Q))
    have hxv : u <= memB (opairB x v) G :=
      (?.memB_evalAtGraph_le x G v).trans' hGv |>.trans
      inf_le_right
    have hQGF : u <= relB ?.Q G F :=
      (isUpperBoundRelB_apply F S ?.Q G).trans' <|
      le_inf (huS.trans hsT |>.trans htUpper) hGS
    exact (?.relQ_apply G F x v z).trans' <|
      le_inf (le_inf (le_inf hGC (huS.trans hsT |>.trans hFC))
        hQGF)
      (le_inf (le_inf (huS.trans hxD) hxv)
        (huS.trans hxz))
    exact (isSupRelB_least y
      (graphImageB (evalAtGraph ? x) S ?.D) ?.R z).trans' <|
      le_inf hsupy hupperz
  exact (?.pointwise_le_relQ (pointwiseSupGraph ? S) F).trans' <|
    le_inf (le_inf hsupC hFC) hpw

/-- The pointwise-supremum graph is a `Q`-supremum of directed `S`. -/
theorem InternalReflexiveModel.pointwiseSupGraph_le_isSupRelB
  (? : InternalReflexiveModel (A := A)) (S : AName.{u} A) :
  isDirectedRelB S ?.C ?.Q <=
    isSupRelB (pointwiseSupGraph ? S) S ?.Q := by
  unfold isSupRelB
  refine le_inf ?_ ?_
  * unfold isUpperBoundRelB
    refine le_iInf fun G => ?_
    rw [le_himp_iff]
    exact ?.pointwiseSupGraph_upper_apply S G
  * refine le_iInf fun F => ?_
    rw [le_himp_iff]

```

```

exact ?.pointwiseSupGraph_least_apply S F

/-- Any `Q`-supremum of directed `S` in `C` is Boolean-equal to the
pointwise-supremum graph. -/
theorem InternalReflexiveModel.isSupRelB_le_eqB_pointwiseSupGraph
  (? : InternalReflexiveModel (A := A)) (S F : AName.{u} A) :
  isDirectedRelB S ?.C ?.Q sqcap memB F ?.C sqcap isSupRelB F S ?.Q <=
  eqB F (pointwiseSupGraph ? S) := by
  let t :=
    isDirectedRelB S ?.C ?.Q sqcap memB F ?.C sqcap
    isSupRelB F S ?.Q
  change t <= eqB F (pointwiseSupGraph ? S)
  have htDir : t <= isDirectedRelB S ?.C ?.Q :=
    inf_le_left.trans inf_le_left
  have htF : t <= memB F ?.C :=
    inf_le_left.trans inf_le_right
  have htSup : t <= isSupRelB F S ?.Q := inf_le_right
  have hsupC : t <= memB (pointwiseSupGraph ? S) ?.C :=
    (?.pointwiseSupGraph_le_mem_mapSpace S).trans' htDir
  have hsupS : t <= isSupRelB (pointwiseSupGraph ? S) S ?.Q :=
    (?.pointwiseSupGraph_le_isSupRelB S).trans' htDir
  have hFQ : t <= relB ?.Q F (pointwiseSupGraph ? S) :=
    (isSupRelB_least F S ?.Q (pointwiseSupGraph ? S)).trans' <|
    le_inf htSup (hsupS.trans inf_le_left)
  have hQF : t <= relB ?.Q (pointwiseSupGraph ? S) F :=
    (isSupRelB_least (pointwiseSupGraph ? S) S ?.Q F).trans' <|
    le_inf hsupS (htSup.trans inf_le_left)
  exact (?.relQ_antisymm F (pointwiseSupGraph ? S)).trans' <|
    le_inf (le_inf (le_inf htF hsupC) hFQ) hQF

/-- The converse of `mapsToSupB_le_isSup_graphImageB` : a supremum of
the canonical image is the displayed image-supremum of the graph. -/
theorem isSup_graphImageB_le_mapsToSupB
  {a : A} (F S D E Q y : AName.{u} A)
  (hF : a <= isFunctionB F D E) :
  a sqcap isSupRelB y (graphImageB F S E) Q <=
  mapsToSupB F S y Q := by
  unfold mapsToSupB
  refine le_inf ?_ ?_
  * refine le_iInf fun x => le_iInf fun z => ?_
    rw [le_himp_iff]
    let t :=
      (a sqcap isSupRelB y (graphImageB F S E) Q) sqcap
      (memB x S sqcap memB (opairB x z) F)
    change t <= relB Q z y
    have hzE : t <= memB z E :=
      (local_function_edge_le_codomain
        ((inf_le_left.trans inf_le_left).trans hF) x z).trans' <|
        le_inf le_rfl (inf_le_right.trans inf_le_right)
    have hzImage : t <= memB z (graphImageB F S E) := by
      rw [memB_graphImageB]
      refine le_inf hzE (le_iSup_of_le x ?_)
      exact inf_le_right
    exact (isUpperBoundRelB_apply y (graphImageB F S E) Q z).trans' <|
      le_inf (inf_le_left.trans inf_le_right |>.trans inf_le_left)
      hzImage
  * refine le_iInf fun u => ?_
    rw [le_himp_iff]
    let upper :=
      ? x : AName A, ? z : AName A,
      memB x S sqcap memB (opairB x z) F ? relB Q z u
    let t :=
      (a sqcap isSupRelB y (graphImageB F S E) Q) sqcap upper

```

```

change t <= relB Q y u
have hupperu : t <= isUpperBoundRelB u (graphImageB F S E) Q := by
  refine le_iInf fun v => ?_
  rw [le_himp_iff, memB_graphImageB, <- inf_assoc, inf_iSup_eq]
  refine iSup_le fun x => ?_
  let s :=
    (t sqcap memB v E) sqcap (memB x S sqcap memB (opairB x v) F)
  change s <= relB Q v u
  have hu := iInf_le
    (fun w : AName A => ? z : AName A,
      memB w S sqcap memB (opairB w z) F ? relB Q z u) x
  have hz := (iInf_le
    (fun z : AName A =>
      memB x S sqcap memB (opairB x z) F ? relB Q z u) v).trans' hu
  exact (le_himp_iff.mp hz).trans' <|
    le_inf (inf_le_left.trans (inf_le_left.trans inf_le_right))
      inf_le_right
  exact (isSupRelB_least y (graphImageB F S E) Q u).trans' <|
    le_inf (inf_le_left.trans inf_le_right) hupperu

/-- If `F` is a `Q`-supremum of directed `S`, then each value `F(x)` is
an `R`-supremum of the evaluation image of `S` at `x`. -/
theorem InternalReflexiveModel.eval_preserves_Q_sup
  (? : InternalReflexiveModel (A := A))
  (S F x y : AName.{u} A) :
  isDirectedRelB S ?.C ?.Q sqcap memB F ?.C sqcap isSupRelB F S ?.Q sqcap
    memB x ?.D sqcap memB y ?.D sqcap memB (opairB x y) F <=
    isSupRelB y (graphImageB (evalAtGraph ? x) S ?.D) ?.R := by
  let t :=
    isDirectedRelB S ?.C ?.Q sqcap memB F ?.C sqcap isSupRelB F S ?.Q sqcap
      memB x ?.D sqcap memB y ?.D sqcap memB (opairB x y) F
  change t <=
    isSupRelB y (graphImageB (evalAtGraph ? x) S ?.D) ?.R
  have htEq : t <= eqB F (pointwiseSupGraph ? S) :=
    (?.isSupRelB_le_eqB_pointwiseSupGraph S F).trans' <|
      inf_le_left.trans (inf_le_left.trans inf_le_left)
  have hFy : t <= memB (opairB x y) F := inf_le_right
  have hP : t <= memB (opairB x y) (pointwiseSupGraph ? S) :=
    (memB_eqB_right F (opairB x y) (pointwiseSupGraph ? S)).trans' <|

Lean 4 source (lines 2001–2400)

    le_inf hFy htEq
  exact (?.memB_pointwiseSupGraph_le S x y).trans' hP |>.trans
    inf_le_right

/-- Conversely, if `y` is the `R`-supremum of the evaluation image of
directed `S` at `x`, then `(x, y)` is an edge of any `Q`-supremum `F`. -/
theorem InternalReflexiveModel.le_memB_of_eval_Q_sup
  (? : InternalReflexiveModel (A := A))
  (S F x y : AName.{u} A) :
  isDirectedRelB S ?.C ?.Q sqcap memB F ?.C sqcap isSupRelB F S ?.Q sqcap
    memB x ?.D sqcap memB y ?.D sqcap
    isSupRelB y (graphImageB (evalAtGraph ? x) S ?.D) ?.R <=
    memB (opairB x y) F := by
  let t :=
    isDirectedRelB S ?.C ?.Q sqcap memB F ?.C sqcap isSupRelB F S ?.Q sqcap
      memB x ?.D sqcap memB y ?.D sqcap
    isSupRelB y (graphImageB (evalAtGraph ? x) S ?.D) ?.R
  change t <= memB (opairB x y) F
  have htEq : t <= eqB F (pointwiseSupGraph ? S) :=
    (?.isSupRelB_le_eqB_pointwiseSupGraph S F).trans' <|
      inf_le_left.trans (inf_le_left.trans inf_le_left)
  have hxD : t <= memB x ?.D :=

```

```

    inf_le_left.trans (inf_le_left.trans inf_le_right)
have hyD : t <= memB y ?.D :=
  inf_le_left.trans inf_le_right
have hsup : t <=
  isSupRelB y (graphImageB (evalAtGraph ? x) S ?.D) ?.R :=
  inf_le_right
have hP : t <= memB (opairB x y) (pointwiseSupGraph ? S) :=
  (?.le_memB_pointwiseSupGraph S x y).trans' <|
  le_inf (le_inf hxD hyD) hsup
exact (memB_eqB_right (pointwiseSupGraph ? S) (opairB x y) F).trans' <|
  le_inf hP (by rw [eqB_comm]; exact hTEq)

/-- Edge membership in a `Q`-supremum is the evaluation-image supremum
statement, at the degree of directedness and support. -/
theorem InternalReflexiveModel.inf_memB_of_eval_Q_sup_eq
  (? : InternalReflexiveModel (A := A))
  (S F x y : AName.{u} A) :
  isDirectedRelB S ?.C ?.Q sqcap memB F ?.C sqcap isSupRelB F S ?.Q sqcap
  memB x ?.D sqcap memB y ?.D sqcap memB (opairB x y) F =
  isDirectedRelB S ?.C ?.Q sqcap memB F ?.C sqcap isSupRelB F S ?.Q sqcap
  memB x ?.D sqcap memB y ?.D sqcap
  isSupRelB y (graphImageB (evalAtGraph ? x) S ?.D) ?.R := by
  apply le_antisymm
* exact le_inf inf_le_left (?.eval_preserves_Q_sup S F x y)
* exact le_inf inf_le_left (?.le_memB_of_eval_Q_sup S F x y)

/-- Packaged image-sup form: a `Q`-supremum evaluates to the displayed
supremum of the fixed-argument image. -/
theorem InternalReflexiveModel.evalAtGraph_mapsToSup_of_Q_sup
  (? : InternalReflexiveModel (A := A))
  (S F x y : AName.{u} A) :
  isDirectedRelB S ?.C ?.Q sqcap memB F ?.C sqcap isSupRelB F S ?.Q sqcap
  memB x ?.D sqcap memB (opairB x y) F <=
  mapsToSupB (evalAtGraph ? x) S y ?.R := by
  let t :=
    isDirectedRelB S ?.C ?.Q sqcap memB F ?.C sqcap isSupRelB F S ?.Q sqcap
    memB x ?.D sqcap memB (opairB x y) F
  change t <= mapsToSupB (evalAtGraph ? x) S y ?.R
  have hxD : t <= memB x ?.D :=
    inf_le_left.trans inf_le_right
  have hFy : t <= memB (opairB x y) F := inf_le_right
  have hFC : t <= memB F ?.C :=
    inf_le_left.trans (inf_le_left.trans
      (inf_le_left.trans inf_le_right))
  have hyD : t <= memB y ?.D :=
    (local_function_edge_le_codomain
      (hFC.trans (?.mem_mapSpace_le_function F)) x y).trans' <|
    le_inf le_rfl hFy
  have hsup : t <=
    isSupRelB y (graphImageB (evalAtGraph ? x) S ?.D) ?.R :=
    (?.eval_preserves_Q_sup S F x y).trans' <|
    le_inf (le_inf inf_le_left hyD) inf_le_right
  exact (isSup_graphImageB_le_mapsToSupB
    (evalAtGraph ? x) S ?.C ?.D ?.R y
    (hxD.trans (?.evalAtGraph_le_isFunctionB x))).trans' <|
    le_inf le_rfl hsup

/-- Application rows are generalized elements at any common degree at which
both factors are. -/
theorem interpDKRelVal_app_isRelElementAt_at
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top )
  (hV : (oid V).IsTotal)

```

```

    (? : RelFun (oid V) (oid ?.D))
    (P Q : LamDK V.idx K.idx) (a : A)
    (hP : IsRelElementAt ?.D a
      (interpDKRelVal ? V K hK hV ? P))
    (hQ : IsRelElementAt ?.D a
      (interpDKRelVal ? V K hK hV ? Q)) :
    IsRelElementAt ?.D a
      (interpDKRelVal ? V K hK hV ? (.app P Q)) := by
let f := applyRelOfElements ? hP hQ
have h := isRelElementAt_of_relFun
  (f.at (PUnit.unit, PUnit.unit))
change IsRelElementAt ?.D (a sqcap a)
  (fun d => f.val (PUnit.unit, PUnit.unit) d) at h
have heval :
  interpDKRelVal ? V K hK hV ? (.app P Q) =
    fun d => f.val (PUnit.unit, PUnit.unit) d := by
  funext d
  rw [interpDKRelVal_app]
  exact (applyRelOfElements_val ? hP hQ
    (PUnit.unit, PUnit.unit) d).symm
rw [heval]
simpa [inf_idem] using h

/-- Every updated app row is a generalized element at the active degree. -/
theorem interpDKBodyGraph_app_rows_isRelElementAt
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top )
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?.D))
  (x : V.idx) (P Q : LamDK V.idx K.idx) (a : A)
  (hP : forall d, IsRelElementAt ?.D a
    (interpDKRelVal ? V K hK hV
      (? .update hV ?.total x d) P))
  (hQ : forall d, IsRelElementAt ?.D a
    (interpDKRelVal ? V K hK hV
      (? .update hV ?.total x d) Q)) :
  forall d, IsRelElementAt ?.D a
    (interpDKRelVal ? V K hK hV
      (? .update hV ?.total x d) (.app P Q)) :=
  fun d =>
    interpDKRelVal_app_isRelElementAt_at ? V K hK hV
      (? .update hV ?.total x d) P Q a (hP d) (hQ d)

/-- Rowwise generalized elements make an evaluator body graph a
degree-local internal function `D -> D`. -/
theorem interpDKBodyGraph_le_isFunctionB
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top )
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?.D))
  (x : V.idx) (P : LamDK V.idx K.idx) (a : A)
  (hP : forall d, IsRelElementAt ?.D a
    (interpDKRelVal ? V K hK hV
      (? .update hV ?.total x d) P)) :
  a <= isFunctionB
    (interpDKBodyGraph ? V K hK hV ? x P) ?.D ?.D := by
let F := interpDKBodyGraph ? V K hK hV ? x P
let r (d : ?.D.idx) :=
  interpDKRelVal ? V K hK hV (? .update hV ?.total x d) P
unfold isFunctionB
refine le_inf (le_inf ?_ ?_) ?_
* unfold interpDKBodyGraph
  rw [subsetB_mk]

```

```

refine le_iInf fun p => ?_
rw [le_himp_iff, memB_opairB_prodB]
have hp : r p.1 p.2 <= memB (?D.child p.2) ?D := by
  have h := (hP p.1).2.1 p.2 |>.trans inf_le_right
  rwa [oid_eps] at h
have hi : memB (?D.child p.1) ?D = top := by
  rw [ <- oid_eps]
  exact ?.total p.1
rw [hi, top_inf_eq]
exact inf_le_right.trans hp
* refine le_iInf fun u => le_iInf fun v => le_iInf fun w => ?_
rw [le_himp_iff]
unfold interpDKBodyGraph
rw [memB_mk, memB_mk, inf_iSup_eq]
rw [inf_iSup_eq]
apply iSup_le
intro pair
rw [ <- inf_assoc, inf_iSup_eq]
rw [iSup_inf_eq]
apply iSup_le
intro pair'
rw [eqB_opairB, eqB_opairB]
let t :=
  a sqcap
    (eqB u (?D.child pair'.1) sqcap eqB v (?D.child pair'.2) sqcap
      r pair'.1 pair'.2) sqcap
    (eqB u (?D.child pair.1) sqcap eqB w (?D.child pair.2) sqcap
      r pair.1 pair.2)
change t <= eqB v w
have hvu : t <= eqB v (?D.child pair'.2) :=
  inf_le_left.trans (inf_le_right.trans
    (inf_le_left.trans inf_le_right))
have hwu : t <= eqB (?D.child pair.2) w := by
  have h : t <= eqB w (?D.child pair.2) :=
    inf_le_right.trans (inf_le_left.trans inf_le_right)
  rwa [eqB_comm] at h
have hsrc : t <= (oid ?D).eq pair'.1 pair.1 := by
  rw [oid_eq_of_total ?D ?.total]
  have h1 : t <= eqB u (?D.child pair'.1) :=
    inf_le_left.trans (inf_le_right.trans
      (inf_le_left.trans inf_le_left))
  have h2 : t <= eqB u (?D.child pair.1) :=
    inf_le_right.trans (inf_le_left.trans inf_le_left)
  exact (eqB_trans (?D.child pair'.1) u (?D.child pair.1)).trans' <|
    le_inf (by rw [eqB_comm]; exact h1) h2
have hval' : t <= r pair'.1 pair'.2 :=
  inf_le_left.trans (inf_le_right.trans inf_le_right)
have hparam :
  (oid ?D).eq pair'.1 pair.1 sqcap r pair'.1 pair'.2 <=
    r pair.1 pair'.2 :=
  interpDKRelVal_isPointwiseFamily ? V K hK hV
  (oid ?D)
  (fun q => ?.update hV ?.total x q)
  (RelFun.isPointwiseFamily_update ? hV ?.total x)
  P pair'.1 pair.1 pair'.2
have htransp : t <= r pair.1 pair'.2 :=
  hparam.trans' (le_inf hsrc hval')
have hval : t <= r pair.1 pair.2 :=
  inf_le_right.trans inf_le_right
have hout : t <= (oid ?D).eq pair'.2 pair.2 :=
  (hP pair.1).2.2.1 pair'.2 pair.2 |>.trans' (le_inf htransp hval)
have hvw : t <= eqB (?D.child pair'.2) (?D.child pair.2) := by
  rw [oid_eq_of_total ?D ?.total] at hout

```



```

    exact hout
  exact (eqB_trans v (?D.child pair'.2) w).trans' <|
    le_inf hvu <|
      (eqB_trans (?D.child pair'.2) (?D.child pair.2) w).trans' <|
        le_inf hvw hwu
* refine le_iInf fun u => ?_
rw [le_himp_iff, memB_eq (x := u) (y := ?D), inf_iSup_eq]
refine iSup_le fun i => ?_
refine (le_inf le_rfl (inf_le_left.trans (hP i).2.2.2)).trans ?_
rw [inf_iSup_eq]
refine iSup_le fun j => le_iSup_of_le (?D.child j) ?_
let s :=
  (a sqcap (eqB u (?D.child i) sqcap ?D.val i)) sqcap r i j
change s <= memB (opairB u (?D.child j)) F
have hval : s <= memB
  (opairB (?D.child i) (?D.child j)) F :=
  (val_le_memB F (i, j)).trans' inf_le_right
exact (memB_opairB_congr F (?D.child i) u
  (?D.child j) (?D.child j)).trans' <|
  le_inf (le_inf
    (by
      have h : s <= eqB u (?D.child i) :=
        inf_le_left.trans (inf_le_right.trans inf_le_left)
      rw [eqB_comm]
      exact h)
    (le_top.trans (eqB_self (A := A) (?D.child j)).ge))
  hval

/-- The application body graph is a degree-local internal function. -/
theorem interpDKBodyGraph_app_le_isFunctionB
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?D = top )
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?D))
  (x : V.idx) (P Q : LamDK V.idx K.idx) (a : A)
  (hP : forall d, IsRelElementAt ?D a
    (interpDKRelVal ? V K hK hV
      (?update hV ?total x d) P))
  (hQ : forall d, IsRelElementAt ?D a
    (interpDKRelVal ? V K hK hV
      (?update hV ?total x d) Q)) :
  a <= isFunctionB
    (interpDKBodyGraph ? V K hK hV ? x (.app P Q))
    ?D ?D :=
  interpDKBodyGraph_le_isFunctionB ? V K hK hV ? x (.app P Q) a
  (interpDKBodyGraph_app_rows_isRelElementAt
    ? V K hK hV ? x P Q a hP hQ)

/-- An application-body edge decomposes into evaluation of `P`, application
of `Fun`, and evaluation of that map at the value of `Q`. -/
theorem interpDKBodyGraph_app_mem_decompose
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?D = top )
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?D))
  (x : V.idx) (P Q : LamDK V.idx K.idx) (a : A)
  (u v : AName.{u} A) :
  a sqcap memB (opairB u v)
    (interpDKBodyGraph ? V K hK hV ? x (.app P Q)) <=
  bigcup p : AName A, bigcup q : AName A, bigcup c : AName A,
  memB (opairB u p)
    (interpDKBodyGraph ? V K hK hV ? x P) sqcap
  memB (opairB u q)

```

```

      (interpDKBodyGraph ? V K hK hV ? x Q) sqcap
      memB (opairB p c) ?.Fun sqcap
      memB c ?.C sqcap
      memB (opairB q v) c := by
unfold interpDKBodyGraph
rw [memB_mk, inf_iSup_eq]
refine iSup_le fun pair => ?_
rw [eqB_opairB, interpDKRelVal_app]
rw [ <- inf_assoc, inf_iSup_eq]
refine iSup_le fun ci => ?_
rw [inf_iSup_eq]
refine iSup_le fun q' => ?_
rw [inf_iSup_eq]
refine iSup_le fun pi => ?_
rw [inf_iSup_eq]
refine iSup_le fun qi =>
  le_iSup_of_le (?.D.child pi) <|
  le_iSup_of_le (?.D.child qi) <|
  le_iSup_of_le (?.C.child ci) ?_
let t :=
  (a sqcap (eqB u (?.D.child pair.1) sqcap eqB v (?.D.child pair.2))) sqcap
  (interpDKRelVal ? V K hK hV
    (? .update hV ?.total x pair.1) P pi sqcap
    interpDKRelVal ? V K hK hV
    (? .update hV ?.total x pair.1) Q qi sqcap
    memB (opairB (?.D.child pi) (?.C.child ci)) ?.Fun sqcap
    (oid ?.D).eq qi q' sqcap
    memB (?.C.child ci) ?.C sqcap
    memB (opairB (?.D.child q') (?.D.child pair.2))
    (?.C.child ci))
change t <=
  memB (opairB u (?.D.child pi))
    (interpDKBodyGraph ? V K hK hV ? x P) sqcap
  memB (opairB u (?.D.child qi))
    (interpDKBodyGraph ? V K hK hV ? x Q) sqcap
  memB (opairB (?.D.child pi) (?.C.child ci)) ?.Fun sqcap
  memB (?.C.child ci) ?.C sqcap
  memB (opairB (?.D.child qi) v) (?.C.child ci)
have hPval : t <=
  memB (opairB (?.D.child pair.1) (?.D.child pi))
    (interpDKBodyGraph ? V K hK hV ? x P) :=
  (val_le_memB
    (interpDKBodyGraph ? V K hK hV ? x P) (pair.1, pi)).trans' <|
  inf_le_right.trans (inf_le_left.trans
    (inf_le_left.trans (inf_le_left.trans
      (inf_le_left.trans inf_le_left))))
have hQval : t <=
  memB (opairB (?.D.child pair.1) (?.D.child qi))
    (interpDKBodyGraph ? V K hK hV ? x Q) :=
  (val_le_memB
    (interpDKBodyGraph ? V K hK hV ? x Q) (pair.1, qi)).trans' <|
  inf_le_right.trans (inf_le_left.trans
    (inf_le_left.trans (inf_le_left.trans
      (inf_le_left.trans inf_le_right))))
have hu : t <= eqB (?.D.child pair.1) u := by
  have h : t <= eqB u (?.D.child pair.1) :=
    inf_le_left.trans (inf_le_right.trans inf_le_left)
  rwa [eqB_comm] at h
have hPedge : t <=
  memB (opairB u (?.D.child pi))
    (interpDKBodyGraph ? V K hK hV ? x P) :=
  (memB_opairB_congr
    (interpDKBodyGraph ? V K hK hV ? x P)

```

```

      (?D.child pair.1) u
      (?D.child pi) (?D.child pi)).trans' <|
le_inf (le_inf hu
  (le_top.trans (eqB_self (A := A) (?D.child pi)).ge))
  hPval
have hQedge : t <=
  memB (opairB u (?D.child qi))
    (interpDKBodyGraph ? V K hK hV ? x Q) :=
(memB_opairB_congr
  (interpDKBodyGraph ? V K hK hV ? x Q)
  (?D.child pair.1) u
  (?D.child qi) (?D.child qi)).trans' <|
le_inf (le_inf hu
  (le_top.trans (eqB_self (A := A) (?D.child qi)).ge))
  hQval
have hFun : t <=
  memB (opairB (?D.child pi) (?C.child ci)) ?Fun :=
  inf_le_right.trans (inf_le_left.trans
    (inf_le_left.trans (inf_le_left.trans inf_le_right)))
have hC : t <= memB (?C.child ci) ?C :=
  inf_le_right.trans (inf_le_left.trans inf_le_right)
have heval0 : t <=
  memB (opairB (?D.child q') (?D.child pair.2))
    (?C.child ci) :=
  inf_le_right.trans inf_le_right
have hqq' : t <= eqB (?D.child q') (?D.child qi) := by
have h : t <= (oid ?D).eq qi q' :=
  inf_le_right.trans (inf_le_left.trans
    (inf_le_left.trans inf_le_right))
rw [oid_eq_of_total ?D ?.total, eqB_comm] at h
exact h
have hv : t <= eqB (?D.child pair.2) v := by
have h : t <= eqB v (?D.child pair.2) :=
  inf_le_left.trans (inf_le_right.trans inf_le_right)
rwa [eqB_comm] at h
have heval : t <=
  memB (opairB (?D.child qi) v) (?C.child ci) :=
(memB_opairB_congr (?C.child ci)
  (?D.child q') (?D.child qi)
  (?D.child pair.2) v).trans' <|
le_inf (le_inf hqq' hv) heval0
exact le_inf (le_inf (le_inf (le_inf hPedge hQedge) hFun) hC) heval

/-- Converse of `interpDKBodyGraph_app_mem_decompose`: semantic components
rebuild an application-body edge. -/
theorem interpDKBodyGraph_app_mem_of_components
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?D = top )
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?D))
  (x : V.idx) (P Q : LamDK V.idx K.idx) (a : A)
  (hP : forall d, IsRelElementAt ?D a
    (interpDKRelVal ? V K hK hV
      (?update hV ?.total x d) P))
  (hQ : forall d, IsRelElementAt ?D a
    (interpDKRelVal ? V K hK hV
      (?update hV ?.total x d) Q))
  (u v p q c : AName.{u} A) :
a sqcap memB (opairB u p)
  (interpDKBodyGraph ? V K hK hV ? x P) sqcap
memB (opairB u q)
  (interpDKBodyGraph ? V K hK hV ? x Q) sqcap
memB (opairB p c) ?Fun sqcap

```

Lean 4 source (lines 2401–2800)

```

    memB c ?.C sqcap
    memB (opairB q v) c <=
  memB (opairB u v)
    (interpDKBodyGraph ? V K hK hV ? x (.app P Q)) := by
let FP := interpDKBodyGraph ? V K hK hV ? x P
let FQ := interpDKBodyGraph ? V K hK hV ? x Q
let t :=
  a sqcap memB (opairB u p) FP sqcap memB (opairB u q) FQ sqcap
    memB (opairB p c) ?.Fun sqcap memB c ?.C sqcap
    memB (opairB q v) c
change t <= memB (opairB u v)
  (interpDKBodyGraph ? V K hK hV ? x (.app P Q))
have htA : t <= a :=
  inf_le_left.trans (inf_le_left.trans
    (inf_le_left.trans (inf_le_left.trans inf_le_left)))
have htFP : t <= memB (opairB u p) FP :=
  inf_le_left.trans (inf_le_left.trans
    (inf_le_left.trans (inf_le_left.trans inf_le_right)))
have htFQ : t <= memB (opairB u q) FQ :=
  inf_le_left.trans (inf_le_left.trans
    (inf_le_left.trans inf_le_right))
have htFun : t <= memB (opairB p c) ?.Fun :=
  inf_le_left.trans (inf_le_left.trans inf_le_right)
have htC : t <= memB c ?.C :=
  inf_le_left.trans inf_le_right
have htEval : t <= memB (opairB q v) c :=
  inf_le_right
have hfunP : a <= isFunctionB FP ?.D ?.D :=
  interpDKBodyGraph_le_isFunctionB ? V K hK hV ? x P a hP
have hfunQ : a <= isFunctionB FQ ?.D ?.D :=
  interpDKBodyGraph_le_isFunctionB ? V K hK hV ? x Q a hQ
have huD : t <= memB u ?.D :=
  (local_function_edge_le_domain (htA.trans hfunP) u p).trans' <|
    le_inf le_rfl htFP
have hpD : t <= memB p ?.D :=
  (local_function_edge_le_codomain (htA.trans hfunP) u p).trans' <|
    le_inf le_rfl htFP
have hqD : t <= memB q ?.D :=
  (local_function_edge_le_codomain (htA.trans hfunQ) u q).trans' <|
    le_inf le_rfl htFQ
have hfunC : t <= isFunctionB c ?.D ?.D :=
  (?.mem_mapSpace_le_function c).trans' htC
have hvD : t <= memB v ?.D :=
  (local_function_edge_le_codomain hfunC q v).trans' <|
    le_inf le_rfl htEval
refine (le_inf le_rfl huD).trans ?_
rw [memB_eq (x := u) (y := ?.D), inf_iSup_eq]
refine iSup_le fun i => ?_
let t1 := t sqcap (eqB u (?.D.child i) sqcap ?.D.val i)
refine (le_inf le_rfl (inf_le_left.trans hpD)).trans ?_
rw [memB_eq (x := p) (y := ?.D), inf_iSup_eq]
refine iSup_le fun pi => ?_
let t2 := t1 sqcap (eqB p (?.D.child pi) sqcap ?.D.val pi)
refine (le_inf le_rfl
  (inf_le_left.trans (inf_le_left.trans hqD))).trans ?_
rw [memB_eq (x := q) (y := ?.D), inf_iSup_eq]
refine iSup_le fun qi => ?_
let t3 := t2 sqcap (eqB q (?.D.child qi) sqcap ?.D.val qi)
refine (le_inf le_rfl
  (inf_le_left.trans (inf_le_left.trans
    (inf_le_left.trans hvD)))).trans ?_
rw [memB_eq (x := v) (y := ?.D), inf_iSup_eq]

```

```

refine iSup_le fun e => ?_
let t4 := t3 sqcap (eqB v (?D.child e) sqcap ?D.val e)
refine (le_inf le_rfl
  (inf_le_left.trans (inf_le_left.trans
    (inf_le_left.trans (inf_le_left.trans htC))))).trans ?_
rw [memB_eq (x := c) (y := ?C), inf_iSup_eq]
refine iSup_le fun ci => ?_
let t5 := t4 sqcap (eqB c (?C.child ci) sqcap ?C.val ci)
change t5 <= memB (opairB u v)
  (interpDKBodyGraph ? V K hK hV ? x (.app P Q))
have ht5t : t5 <= t :=
  inf_le_left.trans (inf_le_left.trans
    (inf_le_left.trans (inf_le_left.trans inf_le_left)))
have ht5A : t5 <= a := ht5t.trans htA
have huEq : t5 <= eqB u (?D.child i) :=
  inf_le_left.trans (inf_le_left.trans
    (inf_le_left.trans (inf_le_left.trans
      (inf_le_right.trans inf_le_left))))
have hpEq : t5 <= eqB p (?D.child pi) :=
  inf_le_left.trans (inf_le_left.trans
    (inf_le_left.trans (inf_le_right.trans inf_le_left)))
have hqEq : t5 <= eqB q (?D.child qi) :=
  inf_le_left.trans (inf_le_left.trans
    (inf_le_right.trans inf_le_left))
have hvEq : t5 <= eqB v (?D.child e) :=
  inf_le_left.trans (inf_le_right.trans inf_le_left)
have hcEq : t5 <= eqB c (?C.child ci) :=
  inf_le_right.trans inf_le_left
have hFPch : t5 <=
  memB (opairB (?D.child i) (?D.child pi)) FP :=
  (memB_opairB_congr FP u (?D.child i) p (?D.child pi)).trans' <|
  le_inf (le_inf huEq hpEq) (ht5t.trans htFP)
have hFQch : t5 <=
  memB (opairB (?D.child i) (?D.child qi)) FQ :=
  (memB_opairB_congr FQ u (?D.child i) q (?D.child qi)).trans' <|
  le_inf (le_inf huEq hqEq) (ht5t.trans htFQ)
have hPraw : t5 <=
  interpDKRelVal ? V K hK hV
  (?update hV ?total x i) P pi := by
  rw [ <- inf_memB_interpDKBodyGraph_eq ? V K hK hV ? x P a hP i pi]
  exact le_inf ht5A hFPch
have hQraw : t5 <=
  interpDKRelVal ? V K hK hV
  (?update hV ?total x i) Q qi := by
  rw [ <- inf_memB_interpDKBodyGraph_eq ? V K hK hV ? x Q a hQ i qi]
  exact le_inf ht5A hFQch
have hFunch : t5 <=
  memB (opairB (?D.child pi) (?C.child ci)) ?Fun :=
  (memB_opairB_congr ?Fun p (?D.child pi) c (?C.child ci)).trans' <|
  le_inf (le_inf hpEq hcEq) (ht5t.trans htFun)
have hCch : t5 <= memB (?C.child ci) ?C :=
  (val_le_memB ?C ci).trans' (inf_le_right.trans inf_le_right)
have heval : t5 <=
  memB (opairB (?D.child qi) (?D.child e))
  (?C.child ci) := by
  have h0 : t5 <= memB (opairB q v) (?C.child ci) :=
    (memB_eqB_right c (opairB q v) (?C.child ci)).trans' <|
    le_inf (ht5t.trans htEval) hcEq
  exact (memB_opairB_congr (?C.child ci)
    q (?D.child qi) v (?D.child e)).trans' <|
    le_inf (le_inf hqEq hvEq) h0
have hqq : t5 <= (oid ?D).eq qi qi := by
  rw [oid_eq_of_total ?D ?total]

```

```

    exact le_top.trans (eqB_self (A := A) (?D.child qi)).ge
  unfold interpDKBodyGraph
  rw [memB_mk]
  refine le_iSup_of_le (i, e) ?_
  rw [eqB_opairB, interpDKRelVal_app]
  refine le_inf (le_inf huEq hvEq)
    (le_iSup_of_le ci <| le_iSup_of_le qi <|
      le_iSup_of_le pi <| le_iSup_of_le qi ?_)
  exact le_inf (le_inf (le_inf (le_inf (le_inf hPraw hQraw) hFunch)
    hqq) hCch) heval

/-- Application is jointly monotone in the `P`-value and the `Q`-value:
`Fun(P(s))(Q(t)) <= Fun(P(s'))(Q(t'))` whenever `s <= s'` and `t <= t'`. -/
theorem interpDKBodyGraph_app_bi_mono
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?D = top )
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?D))
  (x : V.idx) (P Q : LamDK V.idx K.idx) (a : A)
  (hPsc : a <= isScottContinuousB
    (interpDKBodyGraph ? V K hK hV ? x P) ?D ?D ?R ?R)
  (hQsc : a <= isScottContinuousB
    (interpDKBodyGraph ? V K hK hV ? x Q) ?D ?D ?R ?R)
  (s s' t t' p p' q q' c c' y y' : AName.{u} A) :
  a sqcap
    (memB (opairB s p)
      (interpDKBodyGraph ? V K hK hV ? x P) sqcap
      memB (opairB s' p')
        (interpDKBodyGraph ? V K hK hV ? x P) sqcap
      relB ?R s s') sqcap
    (memB (opairB t q)
      (interpDKBodyGraph ? V K hK hV ? x Q) sqcap
      memB (opairB t' q')
        (interpDKBodyGraph ? V K hK hV ? x Q) sqcap
      relB ?R t t') sqcap
    (memB (opairB p c) ?Fun sqcap
      memB (opairB p' c') ?Fun sqcap
      (memB (opairB q y) c sqcap
        memB (opairB q' y') c') <=
      relB ?R y y' := by
  let FP := interpDKBodyGraph ? V K hK hV ? x P
  let FQ := interpDKBodyGraph ? V K hK hV ? x Q
  let u :=
  a sqcap
    (memB (opairB s p) FP sqcap
      memB (opairB s' p') FP sqcap
      relB ?R s s') sqcap
    (memB (opairB t q) FQ sqcap
      memB (opairB t' q') FQ sqcap
      relB ?R t t') sqcap
    (memB (opairB p c) ?Fun sqcap
      memB (opairB p' c') ?Fun sqcap
      (memB (opairB q y) c sqcap
        memB (opairB q' y') c')
  change u <= relB ?R y y'
  have ha : u <= a :=
    inf_le_left.trans (inf_le_left.trans
      (inf_le_left.trans inf_le_left))
  have hPgrp : u <=
    memB (opairB s p) FP sqcap
      memB (opairB s' p') FP sqcap
      relB ?R s s' :=
    inf_le_left.trans (inf_le_left.trans

```

```

      (inf_le_left.trans inf_le_right))
have hQgrp : u <=
  memB (opairB t q) FQ sqcap
  memB (opairB t' q') FQ sqcap
  relB ?.R t t' :=
  inf_le_left.trans (inf_le_left.trans inf_le_right)
have hFgrp : u <=
  memB (opairB p c) ?.Fun sqcap
  memB (opairB p' c') ?.Fun :=
  inf_le_left.trans inf_le_right
have hEgrp : u <=
  memB (opairB q y) c sqcap
  memB (opairB q' y') c' :=
  inf_le_right
have hsp : u <= memB (opairB s p) FP :=
  hPgrp.trans (inf_le_left.trans inf_le_left)
have hsp' : u <= memB (opairB s' p') FP :=
  hPgrp.trans (inf_le_left.trans inf_le_right)
have hss' : u <= relB ?.R s s' :=
  hPgrp.trans inf_le_right
have htq : u <= memB (opairB t q) FQ :=
  hQgrp.trans (inf_le_left.trans inf_le_left)
have htq' : u <= memB (opairB t' q') FQ :=
  hQgrp.trans (inf_le_left.trans inf_le_right)
have htt' : u <= relB ?.R t t' :=
  hQgrp.trans inf_le_right
have hpc : u <= memB (opairB p c) ?.Fun :=
  hFgrp.trans inf_le_left
have hpc' : u <= memB (opairB p' c') ?.Fun :=
  hFgrp.trans inf_le_right
have hqy : u <= memB (opairB q y) c :=
  hEgrp.trans inf_le_left
have hqy' : u <= memB (opairB q' y') c' :=
  hEgrp.trans inf_le_right
have hpp' : u <= relB ?.R p p' :=
  (scottContinuous_apply_mono hPsc s s' p p').trans' <|
  le_inf (le_inf (le_inf ha hsp) hsp') hss'
have hFunc : ( top : A) <=
  isScottContinuousB ?.Fun ?.D ?.C ?.R ?.Q :=
  le_top.trans ?.fun_continuous.ge
have hcc' : u <= relB ?.Q c c' :=
  (scottContinuous_apply_mono hFunc p p' c c').trans' <|
  le_inf (le_inf (le_inf (le_top.trans le_top) hpc) hpc') hpp'
have hqq' : u <= relB ?.R q q' :=
  (scottContinuous_apply_mono hQsc t t' q q').trans' <|
  le_inf (le_inf (le_inf ha htq) htq') htt'
have hcC : u <= memB c ?.C :=
  (local_function_edge_le_codomain
    (le_top.trans ?.fun_function.ge) p c).trans' <|
  le_inf (le_top.trans le_top) hpc
have hc'C : u <= memB c' ?.C :=
  (local_function_edge_le_codomain
    (le_top.trans ?.fun_function.ge) p' c').trans' <|
  le_inf (le_top.trans le_top) hpc'
have hfun' : u <= isFunctionB c' ?.D ?.D :=
  (? .mem_mapSpace_le_function c').trans' hc'C
have hfunc : u <= isFunctionB c ?.D ?.D :=
  (? .mem_mapSpace_le_function c).trans' hcC
have hqD : u <= memB q ?.D :=
  (local_function_edge_le_domain hfunc q y).trans' <|
  le_inf le_rfl hqy
have htot : u <= bigcup w : AName A, memB (opairB q w) c' :=
  (isTotalB_apply c' ?.D q).trans' <|

```

```

    le_inf (hfun'.trans inf_le_right) hqD
  refine (le_inf le_rfl htot).trans ?_
  rw [inf_iSup_eq]
  refine iSup_le fun w => ?_
  let sw := u sqcap memB (opairB q w) c'
  change sw <= relB ?.R y y'
  have hswu : sw <= u := inf_le_left
  have hqw : sw <= memB (opairB q w) c' := inf_le_right
  have hyw : sw <= relB ?.R y w :=
    (?.relQ_apply c c' q y w).trans' <|
    le_inf
      (le_inf (le_inf (hswu.trans hcC) (hswu.trans hc'C))
        (hswu.trans hcc'))
      (le_inf (le_inf (hswu.trans hqD) (hswu.trans hqy)) hqw)
  have hwy' : sw <= relB ?.R w y' :=
    (?.mem_mapSpace_apply_mono c' q q' w y').trans' <|
    le_inf (le_inf (le_inf (hswu.trans hc'C) hqw)
      (hswu.trans hqy'))
      (hswu.trans hqq')
  exact (?.relR_trans y w y').trans' (le_inf hyw hwy')

/-- Degree-local monotonicity of the application body graph. -/
theorem interpDKBodyGraph_app_apply_mono
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top )
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?.D))
  (x : V.idx) (P Q : LamDK V.idx K.idx) (a : A)
  (hPsc : a <= isScottContinuousB
    (interpDKBodyGraph ? V K hK hV ? x P) ?.D ?.D ?.R ?.R)
  (hQsc : a <= isScottContinuousB
    (interpDKBodyGraph ? V K hK hV ? x Q) ?.D ?.D ?.R ?.R)
  (u u' v v' : AName.{u} A) :
  a sqcap memB (opairB u v)
    (interpDKBodyGraph ? V K hK hV ? x (.app P Q)) sqcap
    memB (opairB u' v')
    (interpDKBodyGraph ? V K hK hV ? x (.app P Q)) sqcap
    relB ?.R u u' <=
    relB ?.R v v' := by
  let Fapp := interpDKBodyGraph ? V K hK hV ? x (.app P Q)
  let t0 :=
    a sqcap memB (opairB u v) Fapp sqcap memB (opairB u' v') Fapp sqcap
    relB ?.R u u'
  change t0 <= relB ?.R v v'
  have ht0A : t0 <= a :=
    inf_le_left.trans (inf_le_left.trans inf_le_left)
  have ht0uv : t0 <= memB (opairB u v) Fapp :=
    inf_le_left.trans (inf_le_left.trans inf_le_right)
  have ht0u'v' : t0 <= memB (opairB u' v') Fapp :=
    inf_le_left.trans inf_le_right
  have hdec :
    t0 <= bigcup p : AName A, bigcup q : AName A, bigcup c : AName A,
      memB (opairB u p)
        (interpDKBodyGraph ? V K hK hV ? x P) sqcap
        memB (opairB u q)
        (interpDKBodyGraph ? V K hK hV ? x Q) sqcap
        memB (opairB p c) ?.Fun sqcap
        memB c ?.C sqcap
        memB (opairB q v) c :=
    (interpDKBodyGraph_app_mem_decompose
      ? V K hK hV ? x P Q a u v).trans' <|
    le_inf ht0A ht0uv
  refine (le_inf le_rfl hdec).trans ?_

```



```

rw [inf_iSup_eq]
refine iSup_le fun p => ?_
rw [inf_iSup_eq]
refine iSup_le fun q => ?_
rw [inf_iSup_eq]
refine iSup_le fun c => ?_
let t1 :=
  t0 sqcap
  (memB (opairB u p)
    (interpDKBodyGraph ? V K hK hV ? x P) sqcap
    memB (opairB u q)
      (interpDKBodyGraph ? V K hK hV ? x Q) sqcap
    memB (opairB p c) ?.Fun sqcap
    memB c ?.C sqcap
    memB (opairB q v) c)
have hdec' :
  t1 <= bigcup p' : AName A, bigcup q' : AName A, bigcup c' : AName A,
  memB (opairB u' p')
    (interpDKBodyGraph ? V K hK hV ? x P) sqcap
  memB (opairB u' q')
    (interpDKBodyGraph ? V K hK hV ? x Q) sqcap
  memB (opairB p' c') ?.Fun sqcap
  memB c' ?.C sqcap
  memB (opairB q' v') c' :=
  (interpDKBodyGraph_app_mem_decompose
    ? V K hK hV ? x P Q a u' v').trans' <|
  le_inf (inf_le_left.trans ht0A) (inf_le_left.trans htOu'v')
refine (le_inf le_rfl hdec').trans ?_
rw [inf_iSup_eq]
refine iSup_le fun p' => ?_
rw [inf_iSup_eq]
refine iSup_le fun q' => ?_
rw [inf_iSup_eq]
refine iSup_le fun c' => ?_
let t2 :=
  t1 sqcap
  (memB (opairB u' p')
    (interpDKBodyGraph ? V K hK hV ? x P) sqcap
    memB (opairB u' q')
      (interpDKBodyGraph ? V K hK hV ? x Q) sqcap
    memB (opairB p' c') ?.Fun sqcap
    memB c' ?.C sqcap
    memB (opairB q' v') c')
change t2 <= relB ?.R v v'
have ht2t0 : t2 <= t0 :=
  inf_le_left.trans inf_le_left
have ht1phi : t2 <=
  memB (opairB u p)
    (interpDKBodyGraph ? V K hK hV ? x P) sqcap
  memB (opairB u q)
    (interpDKBodyGraph ? V K hK hV ? x Q) sqcap
  memB (opairB p c) ?.Fun sqcap
  memB c ?.C sqcap
  memB (opairB q v) c :=
  inf_le_left.trans inf_le_right
have ht2psi : t2 <=
  memB (opairB u' p')
    (interpDKBodyGraph ? V K hK hV ? x P) sqcap
  memB (opairB u' q')
    (interpDKBodyGraph ? V K hK hV ? x Q) sqcap
  memB (opairB p' c') ?.Fun sqcap
  memB c' ?.C sqcap
  memB (opairB q' v') c' :=

```

```

inf_le_right
exact (interpDKBodyGraph_app_bi_mono
  ? V K hK hV ? x P Q a hPsc hQsc
  u u' u u' p p' q q' c c' v v').trans' <|
le_inf (le_inf (le_inf (le_inf
  (ht2t0.trans ht0A)
  (le_inf (le_inf
    (ht1phi.trans (inf_le_left.trans
      (inf_le_left.trans (inf_le_left.trans inf_le_left))))
    (ht2psi.trans (inf_le_left.trans
      (inf_le_left.trans (inf_le_left.trans inf_le_left))))
    (ht2t0.trans inf_le_right)))
  (le_inf (le_inf
    (ht1phi.trans (inf_le_left.trans
      (inf_le_left.trans (inf_le_left.trans inf_le_right))))
    (ht2psi.trans (inf_le_left.trans
      (inf_le_left.trans (inf_le_left.trans inf_le_right))))
    (ht2t0.trans inf_le_right)))
  (le_inf
    (ht1phi.trans (inf_le_left.trans
      (inf_le_left.trans inf_le_right)))
    (ht2psi.trans (inf_le_left.trans
      (inf_le_left.trans inf_le_right))))))

```

Lean 4 source (lines 2801–3200)

```

(le_inf
  (ht1phi.trans inf_le_right)
  (ht2psi.trans inf_le_right))

/-- Directed-supremum preservation for the application body graph. -/
theorem interpDKBodyGraph_app_mapsToSup
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top )
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?.D))
  (x : V.idx) (P Q : LamDK V.idx K.idx) (a : A)
  (hfun : a <= isFunctionB
    (interpDKBodyGraph ? V K hK hV ? x (.app P Q)) ?.D ?.D)
  (hPsc : a <= isScottContinuousB
    (interpDKBodyGraph ? V K hK hV ? x P) ?.D ?.D ?.R ?.R)
  (hQsc : a <= isScottContinuousB
    (interpDKBodyGraph ? V K hK hV ? x Q) ?.D ?.D ?.R ?.R)
  (S u v : AName.{u} A) :
  a sqcap isDirectedRelB S ?.D ?.R sqcap isSupRelB u S ?.R sqcap
    memB (opairB u v)
    (interpDKBodyGraph ? V K hK hV ? x (.app P Q)) <=
  mapsToSupB
    (interpDKBodyGraph ? V K hK hV ? x (.app P Q))
    S v ?.R := by
  let FP := interpDKBodyGraph ? V K hK hV ? x P
  let FQ := interpDKBodyGraph ? V K hK hV ? x Q
  let Fapp := interpDKBodyGraph ? V K hK hV ? x (.app P Q)
  have hfunApp : a <= isFunctionB Fapp ?.D ?.D := hfun
  unfold mapsToSupB
  refine le_inf ?_ ?_
  * refine le_iInf fun w => le_iInf fun z => ?_
  rw [le_himp_iff]
  let t :=
    (a sqcap isDirectedRelB S ?.D ?.R sqcap isSupRelB u S ?.R sqcap
      memB (opairB u v) Fapp) sqcap
    (memB w S sqcap memB (opairB w z) Fapp)
  change t <= relB ?.R z v
  have htA : t <= a :=

```

```

    inf_le_left.trans (inf_le_left.trans
      (inf_le_left.trans inf_le_left))
have htU : t <= isSupRelB u S ?.R :=
  inf_le_left.trans (inf_le_left.trans inf_le_right)
have htUV : t <= memB (opairB u v) Fapp :=
  inf_le_left.trans inf_le_right
have htWS : t <= memB w S :=
  inf_le_right.trans inf_le_left
have htWZ : t <= memB (opairB w z) Fapp :=
  inf_le_right.trans inf_le_right
have hWU : t <= relB ?.R w u :=
  (isUpperBoundRelB_apply u S ?.R w).trans' <|
    le_inf (htU.trans inf_le_left) htWS
exact (interpDKBodyGraph_app_apply_mono
  ? V K hK hV ? x P Q a hPsc hQsc w u z v).trans' <|
  le_inf (le_inf (le_inf htA htWZ) htUV) hWU
* refine le_iInf fun b => ?_
rw [le_himp_iff]
let upper :=
  ? w : AName A, ? z : AName A,
  memB w S sqcap memB (opairB w z) Fapp ? relB ?.R z b
let t :=
  (a sqcap isDirectedRelB S ?.D ?.R sqcap isSupRelB u S ?.R sqcap
    memB (opairB u v) Fapp) sqcap upper
change t <= relB ?.R v b
have htA : t <= a :=
  inf_le_left.trans (inf_le_left.trans
    (inf_le_left.trans inf_le_left))
have htDir : t <= isDirectedRelB S ?.D ?.R :=
  inf_le_left.trans (inf_le_left.trans
    (inf_le_left.trans inf_le_right))
have htSup : t <= isSupRelB u S ?.R :=
  inf_le_left.trans (inf_le_left.trans inf_le_right)
have htUV : t <= memB (opairB u v) Fapp :=
  inf_le_left.trans inf_le_right
have htUpper : t <= upper := inf_le_right
have hdec :
  t <= bigcup p : AName A, bigcup q : AName A, bigcup c : AName A,
  memB (opairB u p) FP sqcap
  memB (opairB u q) FQ sqcap
  memB (opairB p c) ?.Fun sqcap
  memB c ?.C sqcap
  memB (opairB q v) c :=
  (interpDKBodyGraph_app_mem_decompose
    ? V K hK hV ? x P Q a u v).trans' <|
    le_inf htA htUV
refine (le_inf le_rfl hdec).trans ?_
rw [inf_iSup_eq]
refine iSup_le fun p => ?_
rw [inf_iSup_eq]
refine iSup_le fun q => ?_
rw [inf_iSup_eq]
refine iSup_le fun c => ?_
let s :=
  t sqcap
  (memB (opairB u p) FP sqcap
    memB (opairB u q) FQ sqcap
    memB (opairB p c) ?.Fun sqcap
    memB c ?.C sqcap
    memB (opairB q v) c)
change s <= relB ?.R v b
have hsT : s <= t := inf_le_left
have hsphi : s <=

```

```

    memB (opairB u p) FP sqcap
    memB (opairB u q) FQ sqcap
    memB (opairB p c) ?.Fun sqcap
    memB c ?.C sqcap
    memB (opairB q v) c :=
  inf_le_right
have hsup : s <=
  memB (opairB u p) FP :=
  hsphi.trans (inf_le_left.trans
    (inf_le_left.trans (inf_le_left.trans inf_le_left)))
have hsuq : s <= memB (opairB u q) FQ :=
  hsphi.trans (inf_le_left.trans
    (inf_le_left.trans (inf_le_left.trans inf_le_right)))
have hspc : s <= memB (opairB p c) ?.Fun :=
  hsphi.trans (inf_le_left.trans
    (inf_le_left.trans inf_le_right))
have hscC : s <= memB c ?.C :=
  hsphi.trans (inf_le_left.trans inf_le_right)
have hsqv : s <= memB (opairB q v) c :=
  hsphi.trans inf_le_right
have hPing :
  s <= isDirectedRelB (graphImageB FP S ?.D) ?.D ?.R sqcap
  isSupRelB p (graphImageB FP S ?.D) ?.R :=
  (scottContinuous_image_sup (hF := hsT.trans htA |>.trans hPsc)
    FP S ?.D ?.D ?.R ?.R u p).trans' <|
  le_inf (le_inf (le_inf le_rfl (hsT.trans htDir))
    (hsT.trans htSup)) hsup
have hFunsc : ( top : A) <=
  isScottContinuousB ?.Fun ?.D ?.C ?.R ?.Q :=
  le_top.trans ?.fun_continuous.ge
have hFunimg :
  s <= isDirectedRelB
    (graphImageB ?.Fun (graphImageB FP S ?.D) ?.C)
    ?.C ?.Q sqcap
  isSupRelB c
    (graphImageB ?.Fun (graphImageB FP S ?.D) ?.C)
    ?.Q :=
  (scottContinuous_image_sup (hF := hFunsc)
    ?.Fun (graphImageB FP S ?.D) ?.D ?.C ?.R ?.Q
    p c).trans' <|
  le_inf (le_inf (le_inf (le_top.trans le_top)
    (hPing.trans inf_le_left))
    (hPing.trans inf_le_right)) hspc
have hQimg :
  s <= isDirectedRelB (graphImageB FQ S ?.D) ?.D ?.R sqcap
  isSupRelB q (graphImageB FQ S ?.D) ?.R :=
  (scottContinuous_image_sup (hF := hsT.trans htA |>.trans hQsc)
    FQ S ?.D ?.D ?.R ?.R u q).trans' <|
  le_inf (le_inf (le_inf le_rfl (hsT.trans htDir))
    (hsT.trans htSup)) hsuq
have hqD : s <= memB q ?.D :=
  (local_function_edge_le_domain
    ((?.mem_mapSpace_le_function c).trans' hscC) q v).trans' <|
  le_inf le_rfl hsqv
have hvD : s <= memB v ?.D :=
  (local_function_edge_le_codomain
    ((?.mem_mapSpace_le_function c).trans' hscC) q v).trans' <|
  le_inf le_rfl hsqv
have hvsup : s <=
  isSupRelB v
    (graphImageB (?.evalAtGraph q)
      (graphImageB ?.Fun (graphImageB FP S ?.D) ?.C)
      ?.D)

```

```

    ?.R :=
    (?.eval_preserves_Q_sup
      (graphImageB ?.Fun (graphImageB FP S ?.D) ?.C)
      c q v).trans' <|
    le_inf (le_inf (le_inf (le_inf (le_inf
      (hFunimg.trans inf_le_left) hscC)
      (hFunimg.trans inf_le_right))
      hqD) hvD) hsqv
  have hupperb : s <= isUpperBoundRelB b
    (graphImageB (?.evalAtGraph q)
      (graphImageB ?.Fun (graphImageB FP S ?.D) ?.C)
      ?.D)
  ?.R := by
  refine le_iInf fun y => ?_
  rw [le_himp_iff, memB_graphImageB, <- inf_assoc, inf_iSup_eq]
  refine iSup_le fun F => ?_
  let sy :=
    (s sqcap memB y ?.D) sqcap
    (memB F
      (graphImageB ?.Fun (graphImageB FP S ?.D) ?.C) sqcap
      memB (opairB F y) (?.evalAtGraph q))
  change sy <= relB ?.R y b
  have hsyS : sy <= s := inf_le_left.trans inf_le_left
  have hyD : sy <= memB y ?.D := inf_le_left.trans inf_le_right
  have hFimg : sy <=
    memB F (graphImageB ?.Fun (graphImageB FP S ?.D) ?.C) :=
    inf_le_right.trans inf_le_left
  have hFy : sy <= memB (opairB F y) (?.evalAtGraph q) :=
    inf_le_right.trans inf_le_right
  have hFeval := (?.memB_evalAtGraph_le q F y).trans' hFy
  have hFC : sy <= memB F ?.C := hFeval.trans inf_le_left
  have hqy : sy <= memB (opairB q y) F := hFeval.trans inf_le_right
  rw [memB_graphImageB] at hFimg
  have hFimg' : sy <=
    memB F ?.C sqcap
    bigcup p? : AName A,
    memB p? (graphImageB FP S ?.D) sqcap
    memB (opairB p? F) ?.Fun :=
    hFimg
  refine (le_inf le_rfl (hFimg'.trans inf_le_right)).trans ?_
  rw [inf_iSup_eq]
  refine iSup_le fun p? => ?_
  let sp :=
    sy sqcap
    (memB p? (graphImageB FP S ?.D) sqcap
      memB (opairB p? F) ?.Fun)
  change sp <= relB ?.R y b
  have hspS : sp <= sy := inf_le_left
  have hp?Img : sp <= memB p? (graphImageB FP S ?.D) :=
    inf_le_right.trans inf_le_left
  have hp?F : sp <= memB (opairB p? F) ?.Fun :=
    inf_le_right.trans inf_le_right
  rw [memB_graphImageB] at hp?Img
  have hp?Img' : sp <=
    memB p? ?.D sqcap
    bigcup w : AName A,
    memB w S sqcap memB (opairB w p?) FP :=
    hp?Img
  refine (le_inf le_rfl (hp?Img'.trans inf_le_right)).trans ?_
  rw [inf_iSup_eq]
  refine iSup_le fun w => ?_
  let sw :=
    sp sqcap (memB w S sqcap memB (opairB w p?) FP)

```

```

change sw <= relB ?.R y b
have hswS : sw <= s :=
  inf_le_left.trans (hspS.trans hsyS)
have hwS : sw <= memB w S :=
  inf_le_right.trans inf_le_left
have hwp? : sw <= memB (opairB w p?) FP :=
  inf_le_right.trans inf_le_right
have hFsc : sw <=
  isScottContinuousB F ?.D ?.D ?.R ?.R :=
  (?.mem_mapSpace_le_scottContinuous F).trans' <|
  inf_le_left.trans (hspS.trans hFC)
have hyFsup : sw <=
  isSupRelB y (graphImageB F (graphImageB FQ S ?.D) ?.D)
  ?.R :=
  ((scottContinuous_image_sup (hF := hFsc)
    F (graphImageB FQ S ?.D) ?.D ?.D ?.R ?.R
    q y).trans inf_le_right).trans' <|
  le_inf (le_inf (le_inf le_rfl
    (hswS.trans (hQimg.trans inf_le_left)))
    (hswS.trans (hQimg.trans inf_le_right)))
    (inf_le_left.trans (hspS.trans hqy)))
have hbF : sw <= isUpperBoundRelB b
  (graphImageB F (graphImageB FQ S ?.D) ?.D) ?.R := by
  refine le_iInf fun z => ?_
  rw [le_himp_iff, memB_graphImageB, <- inf_assoc, inf_iSup_eq]
  refine iSup_le fun q? => ?_
  let sz :=
    (sw sqcap memB z ?.D) sqcap
    (memB q? (graphImageB FQ S ?.D) sqcap
      memB (opairB q? z) F)
  change sz <= relB ?.R z b
  have hszS : sz <= sw := inf_le_left.trans inf_le_left
  have hzD : sz <= memB z ?.D := inf_le_left.trans inf_le_right
  have hq?Img : sz <= memB q? (graphImageB FQ S ?.D) :=
    inf_le_right.trans inf_le_left
  have hq?z : sz <= memB (opairB q? z) F :=
    inf_le_right.trans inf_le_right
  rw [memB_graphImageB] at hq?Img
  have hq?Img' : sz <=
    memB q? ?.D sqcap
    bigcup t_0 : AName A,
    memB t_0 S sqcap memB (opairB t_0 q?) FQ :=
    hq?Img
  refine (le_inf le_rfl (hq?Img'.trans inf_le_right)).trans ?_
  rw [inf_iSup_eq]
  refine iSup_le fun t_0 => ?_
  let st :=
    sz sqcap (memB t_0 S sqcap memB (opairB t_0 q?) FQ)
  change st <= relB ?.R z b
  have hstS : st <= s :=
    inf_le_left.trans (hszS.trans hswS)
  have ht_OS : st <= memB t_0 S :=
    inf_le_right.trans inf_le_left
  have ht_Oq : st <= memB (opairB t_0 q?) FQ :=
    inf_le_right.trans inf_le_right
  have hwS' : st <= memB w S :=
    inf_le_left.trans (hszS.trans hwS)
  have hcommon :
    st <= bigcup r : AName A,
    memB r S sqcap relB ?.R w r sqcap relB ?.R t_0 r :=
    (isDirectedRelB_upper_apply S ?.D ?.R w t_0).trans' <|
    le_inf (le_inf (hstS.trans (hsT.trans htDir)) hwS') ht_OS
  refine (le_inf le_rfl hcommon).trans ?_

```

```

rw [inf_iSup_eq]
refine iSup_le fun r => ?_
let sr :=
  st sqcap (memB r S sqcap relB ?.R w r sqcap relB ?.R t_0 r)
change sr <= relB ?.R z b
have hsrS : sr <= s := inf_le_left.trans hstS
have hrS : sr <= memB r S :=
  inf_le_right.trans (inf_le_left.trans inf_le_left)
have hwr : sr <= relB ?.R w r :=
  inf_le_right.trans (inf_le_left.trans inf_le_right)
have ht_Or : sr <= relB ?.R t_0 r :=
  inf_le_right.trans inf_le_right
have hrD : sr <= memB r ?.D :=
  (memB_of_subsetB r S ?.D).trans' <|
  le_inf hrS (hsrS.trans (hsT.trans htDir) |>.trans
    (isDirectedRelB_subset S ?.D ?.R))
have htotApp : sr <= bigcup z? : AName A,
  memB (opairB r z?) Fapp :=
  (isTotalB_apply Fapp ?.D r).trans' <|
  le_inf
    ((hsrS.trans (hsT.trans htA) |>.trans hfunApp).trans
      inf_le_right)
  hrD
refine (le_inf le_rfl htotApp).trans ?_
rw [inf_iSup_eq]
refine iSup_le fun z? => ?_
let szr := sr sqcap memB (opairB r z?) Fapp
change szr <= relB ?.R z b
have hszrS : szr <= s := inf_le_left.trans hsrS
have hrz? : szr <= memB (opairB r z?) Fapp := inf_le_right
have hz?b : szr <= relB ?.R z? b := by
  have hu := iInf_le
    (fun w' : AName A => ? z' : AName A,
      memB w' S sqcap memB (opairB w' z') Fapp ?
        relB ?.R z' b) r
  have hz := (iInf_le
    (fun z' : AName A =>
      memB r S sqcap memB (opairB r z') Fapp ?
        relB ?.R z' b) z?).trans' hu
  exact (le_himp_iff.mp hz).trans' <|
  le_inf (hszrS.trans (hsT.trans htUpper))
    (le_inf (inf_le_left.trans hrS) hrz?)
have hdecR :
  szr <= bigcup p? : AName A, bigcup q? : AName A, bigcup c? : AName A,
    memB (opairB r p?) FP sqcap
    memB (opairB r q?) FQ sqcap
    memB (opairB p? c?) ?.Fun sqcap
    memB c? ?.C sqcap
    memB (opairB q? z?) c? :=
  (interpDKBodyGraph_app_mem_decompose
    ? V K hK hV ? x P Q a r z?).trans' <|
  le_inf (hszrS.trans (hsT.trans htA)) hrz?
refine (le_inf le_rfl hdecR).trans ?_
rw [inf_iSup_eq]
refine iSup_le fun p? => ?_
rw [inf_iSup_eq]
refine iSup_le fun q? => ?_
rw [inf_iSup_eq]
refine iSup_le fun c? => ?_
let sc :=
  szr sqcap
    (memB (opairB r p?) FP sqcap
      memB (opairB r q?) FQ sqcap

```

```

    memB (opairB p? c?) ?.Fun sqcap
    memB c? ?.C sqcap
    memB (opairB q? z?) c?)
change sc <= relB ?.R z b
have hscS : sc <= s := inf_le_left.trans hszrS
have hscphi : sc <=
  memB (opairB r p?) FP sqcap
  memB (opairB r q?) FQ sqcap
  memB (opairB p? c?) ?.Fun sqcap
  memB c? ?.C sqcap
  memB (opairB q? z?) c? :=
    inf_le_right
have hscA : sc <= a := hscS.trans (hsT.trans htA)
have hsc_wp : sc <= memB (opairB w p?) FP :=
  inf_le_left.trans (inf_le_left.trans (inf_le_left.trans
    (inf_le_left.trans (inf_le_left.trans
      (inf_le_left.trans hwp?))))))
have hsc_rp : sc <= memB (opairB r p?) FP :=
  hscphi.trans (inf_le_left.trans (inf_le_left.trans
    (inf_le_left.trans inf_le_left)))
have hsc_wr : sc <= relB ?.R w r :=
  inf_le_left.trans (inf_le_left.trans hwr)
have hsc_tq : sc <= memB (opairB t_0 q?) FQ :=
  inf_le_left.trans (inf_le_left.trans
    (inf_le_left.trans ht_0q))
have hsc_rq : sc <= memB (opairB r q?) FQ :=
  hscphi.trans (inf_le_left.trans (inf_le_left.trans
    (inf_le_left.trans inf_le_right)))
have hsc_tr : sc <= relB ?.R t_0 r :=
  inf_le_left.trans (inf_le_left.trans ht_0r)
have hsc_pF : sc <= memB (opairB p? F) ?.Fun :=
  inf_le_left.trans (inf_le_left.trans (inf_le_left.trans
    (inf_le_left.trans (inf_le_left.trans (inf_le_left.trans
      (inf_le_left.trans hp?F))))))
have hsc_pc : sc <= memB (opairB p? c?) ?.Fun :=
  hscphi.trans (inf_le_left.trans
    (inf_le_left.trans inf_le_right))
have hsc_qz : sc <= memB (opairB q? z) F :=
  inf_le_left.trans (inf_le_left.trans (inf_le_left.trans
    (inf_le_left.trans hq?z)))
have hsc_qz' : sc <= memB (opairB q? z?) c? :=
  hscphi.trans inf_le_right
have hzz? : sc <= relB ?.R z z? :=
  (interpDKBodyGraph_app_bi_mono
    ? V K hK hV ? x P Q a hPsc hQsc
    w r t_0 r p? p? q? q? F c? z z?).trans' <|
  le_inf (le_inf (le_inf (le_inf

```

Lean 4 source (lines 3201–3600)

```

    hscA
    (le_inf (le_inf hsc_wp hsc_rp) hsc_wr))
  (le_inf (le_inf hsc_tq hsc_rq) hsc_tr))
  (le_inf hsc_pF hsc_pc))
  (le_inf hsc_qz hsc_qz')
have hz?b' : sc <= relB ?.R z? b :=
  inf_le_left.trans hz?b
exact (?.relR_trans z z? b).trans' (le_inf hzz? hz?b')
exact (isSupRelB_least y
  (graphImageB F (graphImageB FQ S ?.D) ?.D)
  ?.R b).trans' <|
  le_inf hyFsup hbF
exact (isSupRelB_least v
  (graphImageB (?.evalAtGraph q)

```



```

      (graphImageB ?.Fun (graphImageB FP S ?.D) ?.C)
      ?.D)
    ?.R b).trans' <|
  le_inf hvsup hupperb

/-- Degree-local Scott continuity of the application body graph. -/
theorem interpDKBodyGraph_app_le_scottContinuous
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top )
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?.D))
  (x : V.idx) (P Q : LamDK V.idx K.idx) (a : A)
  (hP : forall d, IsRelElementAt ?.D a
    (interpDKRelVal ? V K hK hV
      (? .update hV ?.total x d) P))
  (hQ : forall d, IsRelElementAt ?.D a
    (interpDKRelVal ? V K hK hV
      (? .update hV ?.total x d) Q))
  (hPsc : a <= isScottContinuousB
    (interpDKBodyGraph ? V K hK hV ? x P) ?.D ?.D ?.R ?.R)
  (hQsc : a <= isScottContinuousB
    (interpDKBodyGraph ? V K hK hV ? x Q) ?.D ?.D ?.R ?.R) :
  a <= isScottContinuousB
    (interpDKBodyGraph ? V K hK hV ? x (.app P Q))
    ?.D ?.D ?.R ?.R := by
  unfold isScottContinuousB
  refine le_inf (le_inf ?_ ?_) ?_
  * exact interpDKBodyGraph_app_le_isFunctionB
    ? V K hK hV ? x P Q a hP hQ
  * refine le_iInf fun u => le_iInf fun u' =>
    le_iInf fun v => le_iInf fun v' => ?_
  rw [le_himp_iff]
  exact (interpDKBodyGraph_app_apply_mono
    ? V K hK hV ? x P Q a hPsc hQsc u u' v v').trans' <| by
  apply le_of_eq
  ac_rfl
  * refine le_iInf fun S => le_iInf fun u => le_iInf fun v => ?_
  rw [le_himp_iff]
  exact (interpDKBodyGraph_app_mapsToSup
    ? V K hK hV ? x P Q a
    (interpDKBodyGraph_app_le_isFunctionB
      ? V K hK hV ? x P Q a hP hQ)
    hPsc hQsc S u v).trans' <| by
  apply le_of_eq
  ac_rfl

/-!
## Abstraction constructor
-/

/-- Complementary Boolean pieces of a degree reassemble. -/
theorem le_of_compl_cover {a p q : A}
  (hp : a sqcap p <= q) (hpc : a sqcap p? <= q) : a <= q := by
  have : a = (a sqcap p) sqsup (a sqcap p?) := by
  rw [ <- inf_sup_left, sup_compl_eq_top, inf_top_eq ]
  rw [this]
  exact sup_le hp hpc

/-- Distinct keys are disjoint from a common source at the complement of
key equality. -/
theorem setoidEq_keys_disjoint {X : Type*}
  (S : ASetoid (A := A) X) (x y i : X) :
  (S.eq x y)? sqcap S.eq i x sqcap S.eq i y <= False := by

```

```

have hxy : S.eq i x sqcap S.eq i y <= S.eq x y := by
  refine (S.trans x i y).trans' (le_inf ?_ inf_le_right)
  rw [S.symm x i]
  exact inf_le_left
have hre : (S.eq x y)? sqcap S.eq i x sqcap S.eq i y =
  (S.eq x y)? sqcap (S.eq i x sqcap S.eq i y) := by
  ac_rfl
rw [hre]
exact (inf_le_inf le_rfl hxy).trans_eq (compl_inf_self _)

/-- Overwriting a key equal to an earlier key makes the first update
irrelevant. -/
theorem setoidEq_overwrite_disjoint {X : Type*}
  (S : ASetoid (A := A) X) (x y i : X) :
  S.eq x y sqcap (S.eq i x)? sqcap S.eq i y <= False := by
have hix : S.eq i y sqcap S.eq x y <= S.eq i x := by
  refine (S.trans i y x).trans' (le_inf inf_le_left ?_)
  rw [S.symm y x]
  exact inf_le_right
have hre : S.eq x y sqcap (S.eq i x)? sqcap S.eq i y =
  (S.eq i y sqcap S.eq x y) sqcap (S.eq i x)? := by
  ac_rfl
rw [hre]
exact (inf_le_inf hix le_rfl).trans_eq (inf_compl_eq_bot)

/-- `p sqcap q sqcap r <= False` yields `p sqcap q <= r?`. -/
theorem le_compl_of_inf_bot {p q r : A} (h : p sqcap q sqcap r <= False) :
  p sqcap q <= r? := by
  rw [le_compl_iff_disjoint_left, disjoint_iff]
  exact le_bot_iff.mp (h.trans' (by apply le_of_eq; ac_rfl))

/-- Degree-local commutation of successive environment updates, on the
complement of key equality. -/
theorem RelFun.update_commute_val
  {X Y : Type*} {S : ASetoid (A := A) X} {T : ASetoid (A := A) Y}
  (f : RelFun S T) (hS : S.IsTotal) (hT : T.IsTotal)
  (x y : X) (d z : Y) (i : X) (j : Y) :
  (S.eq x y)? sqcap
    ((f.update hS hT y d).update hS hT x z).val i j <=
    ((f.update hS hT x z).update hS hT y d).val i j := by
have hdisj := setoidEq_keys_disjoint S x y i
rw [RelFun.update_val, RelFun.update_val, RelFun.update_val,
  RelFun.update_val]
rw [inf_sup_left]
refine sup_le ?_ ?_
* apply le_sup_of_le_right
  refine le_inf ?_ ?_
  * exact (le_compl_of_inf_bot hdisj).trans' <|
    le_inf inf_le_left (inf_le_right.trans inf_le_left)
  * apply le_sup_of_le_left
    exact inf_le_right
* rw [← inf_assoc, inf_sup_left]
  refine sup_le ?_ ?_
  * apply le_sup_of_le_left
    refine le_inf (inf_le_right.trans inf_le_left)
      (inf_le_right.trans inf_le_right)
  * apply le_sup_of_le_right
    refine le_inf (inf_le_right.trans inf_le_left) ?_
    apply le_sup_of_le_right
    refine le_inf (inf_le_left.trans inf_le_right)
      (inf_le_right.trans inf_le_right)

/-- The other direction of `RelFun.update_commute_val`. -/

```

```

theorem RelFun.update_commute_val_symm
  {X Y : Type*} {S : ASetoid (A := A) X} {T : ASetoid (A := A) Y}
  (f : RelFun S T) (hS : S.IsTotal) (hT : T.IsTotal)
  (x y : X) (d z : Y) (i : X) (j : Y) :
  (S.eq x y)? sqcap
    ((f.update hS hT x z).update hS hT y d).val i j <=
    ((f.update hS hT y d).update hS hT x z).val i j := by
  have h := RelFun.update_commute_val f hS hT y x z d i j
  rwa [S.symm y x] at h

/-- The second update at an equal key overwrites the first. -/
theorem RelFun.update_overwrite_val
  {X Y : Type*} {S : ASetoid (A := A) X} {T : ASetoid (A := A) Y}
  (f : RelFun S T) (hS : S.IsTotal) (hT : T.IsTotal)
  (x y : X) (d z : Y) (i : X) (j : Y) :
  S.eq x y sqcap
    ((f.update hS hT y d).update hS hT x z).val i j <=
    (f.update hS hT x z).val i j := by
  have hdisj := setoidEq_overwrite_disjoint S x y i
  rw [RelFun.update_val, RelFun.update_val, RelFun.update_val]
  rw [inf_sup_left]
  refine sup_le ?_ ?_
  * apply le_sup_of_le_left
    exact inf_le_right
  * rw [ <- inf_assoc, inf_sup_left]
    refine sup_le ?_ ?_
  * exact (hdisj.trans bot_le).trans' <|
    le_inf inf_le_left (inf_le_right.trans inf_le_left)
  * apply le_sup_of_le_right
    refine le_inf (inf_le_left.trans inf_le_right)
      (inf_le_right.trans inf_le_right)

/-- The converse of `RelFun.update_overwrite_val`. -/
theorem RelFun.update_overwrite_val_symm
  {X Y : Type*} {S : ASetoid (A := A) X} {T : ASetoid (A := A) Y}
  (f : RelFun S T) (hS : S.IsTotal) (hT : T.IsTotal)
  (x y : X) (d z : Y) (i : X) (j : Y) :
  S.eq x y sqcap (f.update hS hT x z).val i j <=
    ((f.update hS hT y d).update hS hT x z).val i j := by
  have hdisj := setoidEq_overwrite_disjoint S x y i
  rw [RelFun.update_val, RelFun.update_val, RelFun.update_val]
  rw [inf_sup_left]
  refine sup_le ?_ ?_
  * apply le_sup_of_le_left
    exact inf_le_right
  * apply le_sup_of_le_right
    refine le_inf (inf_le_right.trans inf_le_left) ?_
    apply le_sup_of_le_right
    refine le_inf ?_ ?_
  * exact (le_compl_of_inf_bot hdisj).trans' <|
    le_inf inf_le_left (inf_le_right.trans inf_le_left)
  * exact inf_le_right.trans inf_le_right

/-- Two-point setoid whose off-diagonal equality is the degree `a`. -/
def degreePairSetoid (a : A) : ASetoid (A := A) Bool where
  eq b1 b2 := if b1 = b2 then top else a
  symm := by
    intro b1 b2
    by_cases h : b1 = b2
    * simp [h]
    * simp [h, Ne.symm h]
  trans := by
    intro b1 b2 b3

```

```

by_cases h12 : b1 = b2
* by_cases h23 : b2 = b3
  * simp [h12, h23, h12.trans h23]
  * have h13 : b1 != b3 := mt (fun h => h12.symm.trans h) h23
    simp [h12, h23, h13]
* by_cases h23 : b2 = b3
  * have h13 : b1 != b3 := mt (fun h => h.trans h23.symm) h12
    simp [h12, h23, h13]
* by_cases h13 : b1 = b3
  * simp [h12, h23, h13]
  * simp [h12, h23, h13]

/-- Interpretation transports along a mutual degree-local comparison of
environments. -/
theorem interpDKRelVal_le_of_env
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top )
  (hV : (oid V).IsTotal)
  (?_1 ?_2 : RelFun (oid V) (oid ?.D)) (a : A)
  (h? : forall i j, a sqcap ?_1.val i j <= ?_2.val i j)
  (h?' : forall i j, a sqcap ?_2.val i j <= ?_1.val i j)
  (M : LamDK V.idx K.idx) (d : ?.D.idx) :
  a sqcap interpDKRelVal ? V K hK hV ?_1 M d <=
  interpDKRelVal ? V K hK hV ?_2 M d := by
let ?s : Bool -> RelFun (oid V) (oid ?.D) :=
  fun b => if b then ?_1 else ?_2
have h?s : RelFun.IsPointwiseFamily (degreePairSetoid a) ?s := by
  intro b1 b2 i j
  by_cases h : b1 = b2
  * have : (degreePairSetoid a).eq b1 b2 = top := by
    simp [degreePairSetoid, h]
    rw [this, top_inf_eq, h]
  * have : (degreePairSetoid a).eq b1 b2 = a := by
    simp [degreePairSetoid, h]
    rw [this]
    cases b1 <=> cases b2
    * exact (h rfl).elim
    * exact h?' i j
    * exact h? i j
    * exact (h rfl).elim
have h := interpDKRelVal_isPointwiseFamily ? V K hK hV
  (degreePairSetoid a) ?s h?s M true false d
simpa [degreePairSetoid, ?s] using h

/-- Commuting updates transport the interpretation at the complement of
key equality. -/
theorem interpDKRelVal_update_commute
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top )
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?.D))
  (x y : V.idx) (d e : ?.D.idx)
  (P : LamDK V.idx K.idx) (w : ?.D.idx) :
  ((oid V).eq x y)? sqcap
  interpDKRelVal ? V K hK hV
  ((?.update hV ?.total y d).update hV ?.total x e) P w <=
  interpDKRelVal ? V K hK hV
  ((?.update hV ?.total x e).update hV ?.total y d) P w :=
interpDKRelVal_le_of_env ? V K hK hV _ _ ((oid V).eq x y)?
  (fun i j => RelFun.update_commute_val ? hV ?.total x y d e i j)
  (fun i j => RelFun.update_commute_val_symm ? hV ?.total x y d e i j)
P w

```

```

/-- The other direction of `interpDKRelVal_update_commute`. -/
theorem interpDKRelVal_update_commute_symm
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top )
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?.D))
  (x y : V.idx) (d e : ?.D.idx)
  (P : LamDK V.idx K.idx) (w : ?.D.idx) :
  ((oid V).eq x y)? sqcap
    interpDKRelVal ? V K hK hV
      ((?.update hV ?.total x e).update hV ?.total y d) P w <=
    interpDKRelVal ? V K hK hV
      ((?.update hV ?.total y d).update hV ?.total x e) P w :=
  interpDKRelVal_le_of_env ? V K hK hV _ _ ((oid V).eq x y)?
    (fun i j => RelFun.update_commute_val_symm ? hV ?.total x y d e i j)
    (fun i j => RelFun.update_commute_val ? hV ?.total x y d e i j)
  P w

/-- Overwriting an equal key forgets the earlier update. -/
theorem interpDKRelVal_update_overwrite
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top )
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?.D))
  (x y : V.idx) (d e : ?.D.idx)
  (P : LamDK V.idx K.idx) (w : ?.D.idx) :
  (oid V).eq x y sqcap
    interpDKRelVal ? V K hK hV
      ((?.update hV ?.total y d).update hV ?.total x e) P w <=
    interpDKRelVal ? V K hK hV (?.update hV ?.total x e) P w :=
  interpDKRelVal_le_of_env ? V K hK hV _ _ ((oid V).eq x y)
    (fun i j => RelFun.update_overwrite_val ? hV ?.total x y d e i j)
    (fun i j => RelFun.update_overwrite_val_symm ? hV ?.total x y d e i j)
  P w

/-- The converse of `interpDKRelVal_update_overwrite`. -/
theorem interpDKRelVal_update_overwrite_symm
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top )
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?.D))
  (x y : V.idx) (d e : ?.D.idx)
  (P : LamDK V.idx K.idx) (w : ?.D.idx) :
  (oid V).eq x y sqcap
    interpDKRelVal ? V K hK hV (?.update hV ?.total x e) P w <=
    interpDKRelVal ? V K hK hV
      ((?.update hV ?.total y d).update hV ?.total x e) P w :=
  interpDKRelVal_le_of_env ? V K hK hV _ _ ((oid V).eq x y)
    (fun i j => RelFun.update_overwrite_val_symm ? hV ?.total x y d e i j)
    (fun i j => RelFun.update_overwrite_val ? hV ?.total x y d e i j)
  P w

/-- The empty `D x D` graph. -/
noncomputable def zeroPairGraph (D : AName.{u} A) : AName.{u} A :=
  mk (D.idx x D.idx)
  (fun p => opairB (D.child p.1) (D.child p.2))
  (fun _ => False)

/-- A name whose coefficients lie below `a` is empty at `a`. -/
theorem eqB_mk_zero_of_val_le {I : Type u}
  (child : I -> AName.{u} A) (v : I -> A) (a : A)
  (hv : forall i, v i <= a) :
  a? <= eqB (mk I child v) (mk I child (fun _ => False)) :=

```

```

le_eqB_mk_of_le_val child v (fun _ => False) a?
  (fun i =>
    ((inf_le_inf le_refl (hv i)).trans_eq (compl_inf_self _)))
  (fun _ => inf_le_right.trans bot_le)

/-- The empty pair graph is not a member of the continuous-map space. -/
theorem memB_zeroPairGraph_mapSpace
  (? : InternalReflexiveModel (A := A)) :
  memB (zeroPairGraph ?D) ?C = False := by
  apply le_bot_iff.mp
  have i : ?D.idx := Classical.choice ?complete.nonempty
  have hi : memB (?D.child i) ?D = top := by
    rw [← oid_eps]
    exact ?.total i
  have htot :
    memB (zeroPairGraph ?D) ?C ≤
      isTotalB (zeroPairGraph ?D) ?D :=
    (?.mem_mapSpace_le_function (zeroPairGraph ?D)).trans inf_le_right
  have hempty :
    (bigcup y : AName A,
      memB (opairB (?D.child i) y) (zeroPairGraph ?D)) = False := by
    apply le_bot_iff.mp
    refine iSup_le fun y => ?_
    unfold zeroPairGraph
    rw [memB_mk]
    exact iSup_le fun _ => inf_le_right.trans bot_le
  have : isTotalB (zeroPairGraph ?D) ?D ≤ False := by
    have happ :=
      isTotalB_apply (zeroPairGraph ?D) ?D (?D.child i)
    rw [hi, inf_top_eq, hempty] at happ
    exact happ
  exact htot.trans this

/-- Body-graph coefficients are supported by the row degree. -/
theorem interpDKBodyGraph_val_le
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?D = top)
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?D))
  (x : V.idx) (P : LamDK V.idx K.idx) (a : A)
  (hP : forall d, IsRelElementAt ?D a
    (interpDKRelVal ? V K hK hV
      (?.update hV ?.total x d) P))
  (p : ?D.idx x ?D.idx) :
  (interpDKBodyGraph ? V K hK hV ? x P).val p ≤ a :=
  (hP p.1).2.1 p.2 |>.trans inf_le_left

/-- A degree-local body graph is empty at the complementary degree. -/
theorem interpDKBodyGraph_eqB_zero
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?D = top)
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?D))
  (x : V.idx) (P : LamDK V.idx K.idx) (a : A)
  (hP : forall d, IsRelElementAt ?D a
    (interpDKRelVal ? V K hK hV
      (?.update hV ?.total x d) P)) :
  a? ≤ eqB (interpDKBodyGraph ? V K hK hV ? x P)
    (zeroPairGraph ?D) :=
eqB_mk_zero_of_val_le
  (fun p : ?D.idx x ?D.idx =>
    opairB (?D.child p.1) (?D.child p.2))
  (fun p =>

```

```

      interpDKRelVal ? V K hK hV
      (? .update hV ? .total x p.1) P p.2)
a
(interpDKBodyGraph_val_le ? V K hK hV ? x P a hP)

/-- Lam applied to a degree-local body graph is supported by that degree. -/
theorem interpDKRelVal_abs_memB_le
  (? : InternalReflexiveModel (A := A))

```

Lean 4 source (lines 3601–4000)

```

(V K : AName.{u} A) (hK : subsetB K ? .D = top )
(hV : (oid V).IsTotal)
(? : RelFun (oid V) (oid ? .D))
(x : V.idx) (P : LamDK V.idx K.idx) (a : A)
(hP : forall d, IsRelElementAt ? .D a
  (interpDKRelVal ? V K hK hV
    (? .update hV ? .total x d) P))
(d : ? .D.idx) :
memB (opairB (interpDKBodyGraph ? V K hK hV ? x P)
  (? .D.child d)) ? .Lam <= a := by
have heq :=
  interpDKBodyGraph_eqB_zero ? V K hK hV ? x P a hP
have hcongr :
  a? sqcap memB (opairB
    (interpDKBodyGraph ? V K hK hV ? x P)
    (? .D.child d)) ? .Lam <=
    memB (opairB (zeroPairGraph ? .D) (? .D.child d)) ? .Lam :=
(memB_opairB_congr ? .Lam
  (interpDKBodyGraph ? V K hK hV ? x P)
  (zeroPairGraph ? .D)
  (? .D.child d) (? .D.child d)).trans' <|
le_inf (le_inf (inf_le_left.trans heq)
  (le_top.trans (eqB_self (A := A) (? .D.child d)).ge))
  inf_le_right
have hsub : subsetB ? .Lam (prodB ? .C ? .D) = top :=
  isFunctionB_subset ? .lam_function
have hC :
  memB (opairB (zeroPairGraph ? .D) (? .D.child d)) ? .Lam <=
    memB (zeroPairGraph ? .D) ? .C :=
(memB_opairB_le_of_subsetB hsub
  (zeroPairGraph ? .D) (? .D.child d)).trans
  inf_le_left
have : a? sqcap memB (opairB
  (interpDKBodyGraph ? V K hK hV ? x P)
  (? .D.child d)) ? .Lam <= False :=
(hcongr.trans hC).trans_eq (memB_zeroPairGraph_mapSpace ?)
have hx : memB (opairB
  (interpDKBodyGraph ? V K hK hV ? x P)
  (? .D.child d)) ? .Lam <= a?? := by
rw [le_compl_iff_disjoint_left, disjoint_iff]
exact le_bot_iff.mp (this.trans' (by apply le_of_eq; ac_rfl))
rwa [compl_compl] at hx

/-- Abstraction rows are generalized elements at the meet of the body
degree and the abstraction support. -/
theorem interpDKRelVal_abs_isRelElementAt
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ? .D = top )
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ? .D))
  (x : V.idx) (P : LamDK V.idx K.idx) (a : A)
  (hPsc : a <= isScottContinuousB
    (interpDKBodyGraph ? V K hK hV ? x P) ? .D ? .D ? .R ? .R)

```

```

(hP : forall d, IsRelElementAt ?D a
  (interpDKRelVal ? V K hK hV
    (? .update hV ? .total x d) P)) :
IsRelElementAt ?D (a sqcap lamDKVal V K (.abs x P))
  (interpDKRelVal ? V K hK hV ? (.abs x P)) := by
let body := interpDKBodyGraph ? V K hK hV ? x P
let r (d : ?D.idx) :=
  interpDKRelVal ? V K hK hV ? (.abs x P) d
have hsub : subsetB ?Lam (prodB ?C ?D) = top :=
  isFunctionB_subset ? .lam_function
have hbodyC : a <= memB body ?C :=
  hPsc.trans (? .scottContinuous_le_mem_mapSpace body)
refine <?respects, ?le_eps, ?single, ?total>
* intro d e
  rw [interpDKRelVal_abs, interpDKRelVal_abs]
  refine le_inf (inf_le_right.trans inf_le_left) ?_
  refine (memB_opairB_congr ?Lam body body
    (?D.child d) (?D.child e)).trans' ?_
  refine le_inf (le_inf ?_ ?_ ?_) ?_
  * exact le_top.trans (eqB_self (A := A) body).ge
  * rw [oid_eq_of_total ?D ? .total]
    exact inf_le_left
  * exact inf_le_right.trans inf_le_right
* intro d
  rw [interpDKRelVal_abs]
  refine le_inf (le_inf ?_ inf_le_left) ?_
  * exact (interpDKRelVal_abs_memB_le ? V K hK hV ? x P a hP d).trans' <|
    inf_le_right
  * have heps :
    memB (opairB body (?D.child d)) ?Lam <=
      memB (?D.child d) ?D :=
      (memB_opairB_le_of_subsetB hsub body (?D.child d)).trans
        inf_le_right
    rw [oid_eps]
    exact inf_le_right.trans heps
* intro d e
  rw [interpDKRelVal_abs, interpDKRelVal_abs]
  have hsv :=
    isSingleValuedB_apply ?Lam body (?D.child d) (?D.child e)
  rw [isFunctionB_single ? .lam_function, top_inf_eq] at hsv
  rw [oid_eq_of_total ?D ? .total]
  exact hsv.trans' <|
    le_inf (inf_le_left.trans inf_le_right)
      (inf_le_right.trans inf_le_right)
* have htot :
  memB body ?C <=
    bigcup y : AName A, memB (opairB body y) ?Lam :=
    (isTotalB_apply ?Lam ?C body).trans' <|
      le_inf (le_top.trans (isFunctionB_total ? .lam_function).ge)
        le_rfl
  have hproj : a <=
    bigcup j : ?D.idx, memB (opairB body (?D.child j)) ?Lam := by
    refine (le_inf le_rfl (htot.trans' hbodyC)).trans ?_
  rw [inf_iSup_eq]
  refine iSup_le fun y =>
    inf_memB_opairB_le_iSup_child
      (hsub := le_top.trans hsub.ge) body y
  refine (le_inf inf_le_right (inf_le_left.trans hproj)).trans ?_
  rw [inf_iSup_eq]
  refine iSup_le fun j => le_iSup_of_le j ?_
  rw [interpDKRelVal_abs]

```

/-- Every updated abs row is a generalized element at the active degree. -/


```

theorem interpDKBodyGraph_abs_rows_isRelElementAt
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top )
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?.D))
  (y x : V.idx) (P : LamDK V.idx K.idx) (a : A)
  (hInner : forall d, a <= isScottContinuousB
    (interpDKBodyGraph ? V K hK hV (? .update hV ?.total y d) x P)
    ?.D ?.D ?.R ?.R)
  (hInnerRows : forall d, forall e, IsRelElementAt ?.D a
    (interpDKRelVal ? V K hK hV
      ((?.update hV ?.total y d).update hV ?.total x e) P)) :
  forall d, IsRelElementAt ?.D (a sqcap lamDKVal V K (.abs x P))
    (interpDKRelVal ? V K hK hV
      (? .update hV ?.total y d) (.abs x P)) :=
fun d =>
  interpDKRelVal_abs_isRelElementAt ? V K hK hV
    (? .update hV ?.total y d) x P a (hInner d) (hInnerRows d)

/-- Rowwise abs elements make the abs body graph a degree-local function. -/
theorem interpDKBodyGraph_abs_le_isFunctionB
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top )
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?.D))
  (y x : V.idx) (P : LamDK V.idx K.idx) (a : A)
  (hInner : forall d, a <= isScottContinuousB
    (interpDKBodyGraph ? V K hK hV (? .update hV ?.total y d) x P)
    ?.D ?.D ?.R ?.R)
  (hInnerRows : forall d, forall e, IsRelElementAt ?.D a
    (interpDKRelVal ? V K hK hV
      ((?.update hV ?.total y d).update hV ?.total x e) P)) :
  a sqcap lamDKVal V K (.abs x P) <=
  isFunctionB
    (interpDKBodyGraph ? V K hK hV ? y (.abs x P))
    ?.D ?.D :=
interpDKBodyGraph_le_isFunctionB ? V K hK hV ? y (.abs x P)
  (a sqcap lamDKVal V K (.abs x P))
  (interpDKBodyGraph_abs_rows_isRelElementAt
    ? V K hK hV ? y x P a hInner hInnerRows)

/-- Boolean equality of graphs transports Scott continuity at the same
degree, through the exact map space. -/
theorem InternalReflexiveModel.eqB_le_scottContinuous
  (? : InternalReflexiveModel (A := A))
  (F G : AName.{u} A) (a : A)
  (heq : a <= eqB F G)
  (hF : a <= isScottContinuousB F ?.D ?.D ?.R ?.R) :
  a <= isScottContinuousB G ?.D ?.D ?.R ?.R := by
have hFC : a <= memB F ?.C :=
  hF.trans (? .scottContinuous_le_mem_mapSpace F)
have hGC : a <= memB G ?.C :=
  (memB_eqB_left F ?.C G).trans' (le_inf hFC heq)
exact hGC.trans (? .mem_mapSpace_le_scottContinuous G)

/-- Overwriting an equal key does not change the body graph. -/
theorem interpDKBodyGraph_update_overwrite_eqB
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top )
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?.D))
  (x y : V.idx) (d : ?.D.idx) (P : LamDK V.idx K.idx) :
  (oid V).eq x y <=

```

```

    eqB (interpDKBodyGraph ? V K hK hV (? .update hV ? .total y d) x P)
      (interpDKBodyGraph ? V K hK hV ? x P) :=
le_eqB_mk_of_le_val
  (fun p : ? .D.idx x ? .D.idx =>
    opairB (? .D.child p.1) (? .D.child p.2))
  (fun p =>
    interpDKRelVal ? V K hK hV
      ((? .update hV ? .total y d) .update hV ? .total x p.1) P p.2)
  (fun p =>
    interpDKRelVal ? V K hK hV
      (? .update hV ? .total x p.1) P p.2)
  ((oid V) .eq x y)
  (fun p =>
    interpDKRelVal_update_overwrite ? V K hK hV ? x y d p.1 P p.2)
  (fun p =>
    interpDKRelVal_update_overwrite_symm ? V K hK hV ? x y d p.1 P p.2)

/-- Inner body graphs at equal keys are equal, independently of the
overwritten value. -/
theorem interpDKAbsFamily_eqB_of_eq_keys
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ? .D = top )
  (hV : (oid V) .IsTotal)
  (? : RelFun (oid V) (oid ? .D))
  (x y : V.idx) (d d' : ? .D.idx) (P : LamDK V.idx K.idx) :
  (oid V) .eq x y <=
    eqB (interpDKBodyGraph ? V K hK hV (? .update hV ? .total y d) x P)
      (interpDKBodyGraph ? V K hK hV (? .update hV ? .total y d') x P) := by
have hd :=
  interpDKBodyGraph_update_overwrite_eqB ? V K hK hV ? x y d P
have hd' :=
  interpDKBodyGraph_update_overwrite_eqB ? V K hK hV ? x y d' P
exact (eqB_trans
  (interpDKBodyGraph ? V K hK hV (? .update hV ? .total y d) x P)
  (interpDKBodyGraph ? V K hK hV ? x P)
  (interpDKBodyGraph ? V K hK hV (? .update hV ? .total y d') x P)) .trans' <|
le_inf hd (hd' .trans_eq (eqB_comm
  (interpDKBodyGraph ? V K hK hV (? .update hV ? .total y d') x P)
  (interpDKBodyGraph ? V K hK hV ? x P)))

/-- On the diagonal `x = y`, abs body-graph outputs coincide. -/
theorem interpDKBodyGraph_abs_apply_const
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ? .D = top )
  (hV : (oid V) .IsTotal)
  (? : RelFun (oid V) (oid ? .D))
  (y x : V.idx) (P : LamDK V.idx K.idx) (a : A)
  (hInner : forall d, a <= isScottContinuousB
    (interpDKBodyGraph ? V K hK hV (? .update hV ? .total y d) x P)
    ? .D ? .D ? .R ? .R)
  (hInnerRows : forall d, forall e, IsRelElementAt ? .D a
    (interpDKRelVal ? V K hK hV
      ((? .update hV ? .total y d) .update hV ? .total x e) P))
  (u u' v v' : AName.{u} A) :
  (oid V) .eq x y sqcap a sqcap lamDKVal V K (.abs x P) sqcap
    memB (opairB u v)
      (interpDKBodyGraph ? V K hK hV ? y (.abs x P)) sqcap
    memB (opairB u' v')
      (interpDKBodyGraph ? V K hK hV ? y (.abs x P)) <=
    eqB v v' := by
let Fabs := interpDKBodyGraph ? V K hK hV ? y (.abs x P)
let b := a sqcap lamDKVal V K (.abs x P)
have hfun : b <= isFunctionB Fabs ? .D ? .D :=

```

```

interpDKBodyGraph_abs_le_isFunctionB ? V K hK hV ? y x P a
  hInner hInnerRows
have hrows :=
  interpDKBodyGraph_abs_rows_isRelElementAt ? V K hK hV ? y x P a
  hInner hInnerRows
let t :=
  (oid V).eq x y sqcap a sqcap lamDKVal V K (.abs x P) sqcap
  memB (opairB u v) Fabs sqcap memB (opairB u' v') Fabs
change t <= eqB v v'
have htEq : t <= (oid V).eq x y :=
  inf_le_left.trans (inf_le_left.trans (inf_le_left.trans inf_le_left))
have htA : t <= a :=
  inf_le_left.trans (inf_le_left.trans (inf_le_left.trans inf_le_right))
have htLam : t <= lamDKVal V K (.abs x P) :=
  inf_le_left.trans (inf_le_left.trans inf_le_right)
have htB : t <= b := le_inf htA htLam
have htuv : t <= memB (opairB u v) Fabs :=
  inf_le_left.trans inf_le_right
have htuv' : t <= memB (opairB u' v') Fabs :=
  inf_le_right
have hdec :
  t <= bigcup p : ?.D.idx x ?.D.idx,
  eqB (opairB u v)
  (opairB (?.D.child p.1) (?.D.child p.2)) sqcap
  memB (opairB (?.D.child p.1) (?.D.child p.2)) Fabs :=
  (inf_memB_le_iSup_matrix (hsub := (htB.trans hfun).trans
    (inf_le_left.trans inf_le_left)) (opairB u v)).trans' <|
  le_inf le_rfl htuv
have hdec' :
  t <= bigcup q : ?.D.idx x ?.D.idx,
  eqB (opairB u' v')
  (opairB (?.D.child q.1) (?.D.child q.2)) sqcap
  memB (opairB (?.D.child q.1) (?.D.child q.2)) Fabs :=
  (inf_memB_le_iSup_matrix (hsub := (htB.trans hfun).trans
    (inf_le_left.trans inf_le_left)) (opairB u' v')).trans' <|
  le_inf le_rfl htuv'
refine (le_inf (le_inf le_rfl hdec) hdec').trans ?_
rw [inf_iSup_eq (a := A)]
refine iSup_le fun q => ?_
rw [inf_right_comm, inf_iSup_eq (a := A)]
refine iSup_le fun p => ?_
let s :=
  t sqcap
  (eqB (opairB u' v')
    (opairB (?.D.child q.1) (?.D.child q.2)) sqcap
    memB (opairB (?.D.child q.1) (?.D.child q.2)) Fabs) sqcap
  (eqB (opairB u v)
    (opairB (?.D.child p.1) (?.D.child p.2)) sqcap
    memB (opairB (?.D.child p.1) (?.D.child p.2)) Fabs)
change s <= eqB v v'
have hsT : s <= t := inf_le_left.trans inf_le_left
have hsp : s <=
  memB (opairB (?.D.child p.1) (?.D.child p.2)) Fabs :=
  inf_le_right.trans inf_le_right
have hsq : s <=
  memB (opairB (?.D.child q.1) (?.D.child q.2)) Fabs :=
  inf_le_left.trans (inf_le_right.trans inf_le_right)
have hvp : s <= eqB v (?.D.child p.2) := by
  have hop : s <=
    eqB (opairB u v)
    (opairB (?.D.child p.1) (?.D.child p.2)) :=
    inf_le_right.trans inf_le_left
  rw [eqB_opairB] at hop

```

```

    exact hop.trans inf_le_right
have hvq : s <= eqB v' (?.D.child q.2) := by
  have hop : s <=
    eqB (opairB u' v')
      (opairB (?.D.child q.1) (?.D.child q.2)) :=
    inf_le_left.trans (inf_le_right.trans inf_le_left)
  rw [eqB_opairB] at hop
  exact hop.trans inf_le_right
have hnornmp :=
  (interpDKBodyGraph_mem_normalize ? V K hK hV ? y (.abs x P)
    b hrows p.1 p.2).2
have hnornmq :=
  (interpDKBodyGraph_mem_normalize ? V K hK hV ? y (.abs x P)
    b hrows q.1 q.2).2
have hvalp : s <=
  interpDKRelVal ? V K hK hV
    (?.update hV ?.total y p.1) (.abs x P) p.2 :=
  hnornmp.trans' (le_inf (hsT.trans htB) hsp)
have hvalq : s <=
  interpDKRelVal ? V K hK hV
    (?.update hV ?.total y q.1) (.abs x P) q.2 :=
  hnornmq.trans' (le_inf (hsT.trans htB) hsq)
rw [interpDKRelVal_abs] at hvalp
rw [interpDKRelVal_abs] at hvalq
have hbodyEq :=
  interpDKAbsFamily_eqB_of_eq_keys ? V K hK hV ? x y p.1 q.1 P
have hmemp : s <=
  memB (opairB
    (interpDKBodyGraph ? V K hK hV
      (?.update hV ?.total y p.1) x P)
    (?.D.child p.2)) ?.Lam :=
  hvalp.trans inf_le_right
have hmemq : s <=
  memB (opairB
    (interpDKBodyGraph ? V K hK hV
      (?.update hV ?.total y q.1) x P)
    (?.D.child q.2)) ?.Lam :=
  hvalq.trans inf_le_right
have hmemq' : s <=
  memB (opairB
    (interpDKBodyGraph ? V K hK hV
      (?.update hV ?.total y p.1) x P)
    (?.D.child q.2)) ?.Lam :=
  (memB_opairB_congr ?.Lam
    (interpDKBodyGraph ? V K hK hV
      (?.update hV ?.total y q.1) x P)
    (interpDKBodyGraph ? V K hK hV
      (?.update hV ?.total y p.1) x P)
    (?.D.child q.2) (?.D.child q.2)).trans' <|
  le_inf (le_inf
    ((hsT.trans htEq).trans hbodyEq |>.trans_eq
      (eqB_comm
        (interpDKBodyGraph ? V K hK hV
          (?.update hV ?.total y p.1) x P)
        (interpDKBodyGraph ? V K hK hV
          (?.update hV ?.total y q.1) x P)))
    (le_top.trans (eqB_self (A := A) (?.D.child q.2)).ge))
  hmemq
have hsv :=
  isSingleValuedB_apply ?.Lam
    (interpDKBodyGraph ? V K hK hV
      (?.update hV ?.total y p.1) x P)
    (?.D.child p.2) (?.D.child q.2)

```

```

rw [isFunctionB_single ?.lam_function, top_inf_eq] at hsv
have hpq : s <= eqB (?.D.child p.2) (?.D.child q.2) :=
  hsv.trans' (le_inf hmemp hmemq')
exact (eqB_trans v (?.D.child p.2) v').trans' <|
  le_inf hvp <|
    (eqB_trans (?.D.child p.2) (?.D.child q.2) v').trans' <|
      le_inf hpq (by rw [eqB_comm]; exact hvq)

/-- Degree-local Scott continuity of the abs body graph on the diagonal. -/
theorem interpDKBodyGraph_abs_le_scottContinuous_eq
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top )
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?.D))
  (y x : V.idx) (P : LamDK V.idx K.idx) (a : A)
  (hInner : forall d, a <= isScottContinuousB
    (interpDKBodyGraph ? V K hK hV (?.update hV ?.total y d) x P)
    ?.D ?.D ?.R ?.R)
  (hInnerRows : forall d, forall e, IsRelElementAt ?.D a
    (interpDKRelVal ? V K hK hV
      ((?.update hV ?.total y d).update hV ?.total x e) P)) :
  (oid V).eq x y sqcap a sqcap lamDKVal V K (.abs x P) <=
    isScottContinuousB
      (interpDKBodyGraph ? V K hK hV ? y (.abs x P))
      ?.D ?.D ?.R ?.R := by
let Fabs := interpDKBodyGraph ? V K hK hV ? y (.abs x P)
have hfun : a sqcap lamDKVal V K (.abs x P) <=
  isFunctionB Fabs ?.D ?.D :=
  interpDKBodyGraph_abs_le_isFunctionB ? V K hK hV ? y x P a
  hInner hInnerRows
refine ?.constantMap_le_scottContinuous Fabs
  ((oid V).eq x y sqcap a sqcap lamDKVal V K (.abs x P)) ?_ ?_

```

Lean 4 source (lines 4001–4400)

```

* exact (le_inf (inf_le_left.trans inf_le_right) inf_le_right).trans hfun
* exact interpDKBodyGraph_abs_apply_const ? V K hK hV ? y x P a
  hInner hInnerRows

/-- Inner body graphs of `P` lie in the exact map space. -/
theorem interpDKAbsFamily_mem_mapSpace
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top )
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?.D))
  (y x : V.idx) (P : LamDK V.idx K.idx) (a : A)
  (hInner : forall d, a <= isScottContinuousB
    (interpDKBodyGraph ? V K hK hV (?.update hV ?.total y d) x P)
    ?.D ?.D ?.R ?.R)
  (d : ?.D.idx) :
  a <= memB
    (interpDKBodyGraph ? V K hK hV (?.update hV ?.total y d) x P)
    ?.C :=
(hInner d).trans
  (?.scottContinuous_le_mem_mapSpace
    (interpDKBodyGraph ? V K hK hV (?.update hV ?.total y d) x P))

/-- Outer body graphs of `P` lie in the exact map space. -/
theorem interpDKAbsOuter_mem_mapSpace
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top )
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?.D))
  (y x : V.idx) (P : LamDK V.idx K.idx) (a : A)

```

```

(hOuter : forall z, a <= isScottContinuousB
  (interpDKBodyGraph ? V K hK hV (?update hV ?.total x z) y P)
  ?.D ?.D ?.R ?.R)
(z : ?.D.idx) :
a <= memB
  (interpDKBodyGraph ? V K hK hV (?update hV ?.total x z) y P)
  ?.C :=
(hOuter z).trans
  (?.scottContinuous_le_mem_mapSpace
    (interpDKBodyGraph ? V K hK hV (?update hV ?.total x z) y P))

/-- Off-diagonal, an inner body-graph edge is an outer body-graph edge. -/
theorem interpDKAbsFamily_inner_le_outer
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top )
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?.D))
  (y x : V.idx) (P : LamDK V.idx K.idx) (a : A)
  (hInnerRows : forall d, forall e, IsRelElementAt ?.D a
    (interpDKRelVal ? V K hK hV
      ((?.update hV ?.total y d).update hV ?.total x e) P))
  (hOuterRows : forall z, forall d, IsRelElementAt ?.D a
    (interpDKRelVal ? V K hK hV
      ((?.update hV ?.total x z).update hV ?.total y d) P))
  (d e w : ?.D.idx) :
  ((oid V).eq x y)? sqcap a sqcap
    memB (opairB (?.D.child e) (?.D.child w))
      (interpDKBodyGraph ? V K hK hV
        (?.update hV ?.total y d) x P) <=
    memB (opairB (?.D.child d) (?.D.child w))
      (interpDKBodyGraph ? V K hK hV
        (?.update hV ?.total x e) y P) := by
let t :=
  ((oid V).eq x y)? sqcap a sqcap
    memB (opairB (?.D.child e) (?.D.child w))
      (interpDKBodyGraph ? V K hK hV
        (?.update hV ?.total y d) x P)
change t <=
  memB (opairB (?.D.child d) (?.D.child w))
    (interpDKBodyGraph ? V K hK hV
      (?.update hV ?.total x e) y P)
have htEq : t <= ((oid V).eq x y)? :=
  inf_le_left.trans inf_le_left
have htA : t <= a := inf_le_left.trans inf_le_right
have htmem : t <=
  memB (opairB (?.D.child e) (?.D.child w))
    (interpDKBodyGraph ? V K hK hV
      (?.update hV ?.total y d) x P) :=
  inf_le_right
have hval :
  t <= interpDKRelVal ? V K hK hV
    ((?.update hV ?.total y d).update hV ?.total x e) P w :=
  (interpDKBodyGraph_mem_normalize ? V K hK hV
    (?.update hV ?.total y d) x P a (hInnerRows d) e w).2.trans' <|
  le_inf htA htmem
have hcomm :
  t <= interpDKRelVal ? V K hK hV
    ((?.update hV ?.total x e).update hV ?.total y d) P w :=
  (interpDKRelVal_update_commute ? V K hK hV ? x y d e P w).trans' <|
  le_inf htEq hval
exact (interpDKBodyGraph_mem_normalize ? V K hK hV
  (?.update hV ?.total x e) y P a (hOuterRows e) d w).1.trans' hcomm

```

```

/-- The converse of `interpDKAbsFamily_inner_le_outer`. -/
theorem interpDKAbsFamily_outer_le_inner
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top )
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?.D))
  (y x : V.idx) (P : LamDK V.idx K.idx) (a : A)
  (hInnerRows : forall d, forall e, IsRelElementAt ?.D a
    (interpDKRelVal ? V K hK hV
      ((?.update hV ?.total y d).update hV ?.total x e) P))
  (hOuterRows : forall z, forall d, IsRelElementAt ?.D a
    (interpDKRelVal ? V K hK hV
      ((?.update hV ?.total x z).update hV ?.total y d) P))
  (d e w : ?.D.idx) :
  ((oid V).eq x y)? sqcap a sqcap
    memB (opairB (?.D.child d) (?.D.child w))
      (interpDKBodyGraph ? V K hK hV
        (?.update hV ?.total x e) y P) <=
  memB (opairB (?.D.child e) (?.D.child w))
    (interpDKBodyGraph ? V K hK hV
      (?.update hV ?.total y d) x P) := by
let t :=
  ((oid V).eq x y)? sqcap a sqcap
    memB (opairB (?.D.child d) (?.D.child w))
      (interpDKBodyGraph ? V K hK hV
        (?.update hV ?.total x e) y P)
change t <=
  memB (opairB (?.D.child e) (?.D.child w))
    (interpDKBodyGraph ? V K hK hV
      (?.update hV ?.total y d) x P)
have htEq : t <= ((oid V).eq x y)? :=
  inf_le_left.trans inf_le_left
have htA : t <= a := inf_le_left.trans inf_le_right
have htmem : t <=
  memB (opairB (?.D.child d) (?.D.child w))
    (interpDKBodyGraph ? V K hK hV
      (?.update hV ?.total x e) y P) :=
  inf_le_right
have hval :
  t <= interpDKRelVal ? V K hK hV
    ((?.update hV ?.total x e).update hV ?.total y d) P w :=
  (interpDKBodyGraph_mem_normalize ? V K hK hV
    (?.update hV ?.total x e) y P a (hOuterRows e) d w).2.trans' <|
  le_inf htA htmem
have hcomm :
  t <= interpDKRelVal ? V K hK hV
    ((?.update hV ?.total y d).update hV ?.total x e) P w :=
  (interpDKRelVal_update_commute_symm ? V K hK hV ? x y d e P w).trans' <|
  le_inf htEq hval
exact (interpDKBodyGraph_mem_normalize ? V K hK hV
  (?.update hV ?.total y d) x P a (hInnerRows d) e w).1.trans' hcomm

/-- Displayed abs-body edges are `Lam` applied to the inner graph. -/
theorem interpDKBodyGraph_abs_mem_eq_lam
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top )
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?.D))
  (y x : V.idx) (P : LamDK V.idx K.idx) (a : A)
  (hInner : forall d, a <= isScottContinuousB
    (interpDKBodyGraph ? V K hK hV (?.update hV ?.total y d) x P)
    ?.D ?.D ?.R ?.R)
  (hInnerRows : forall d, forall e, IsRelElementAt ?.D a

```

```

      (interpDKRelVal ? V K hK hV
        ((?.update hV ?.total y d).update hV ?.total x e) P))
    (d e : ?.D.idx) :
  a sqcap lamDKVal V K (.abs x P) sqcap
    memB (opairB (?.D.child d) (?.D.child e))
      (interpDKBodyGraph ? V K hK hV ? y (.abs x P)) =
  a sqcap lamDKVal V K (.abs x P) sqcap
    memB (opairB
      (interpDKBodyGraph ? V K hK hV
        (?.update hV ?.total y d) x P)
      (?.D.child e)) ?.Lam := by
have hrows :=
  interpDKBodyGraph_abs_rows_isRelElementAt ? V K hK hV ? y x P a
  hInner hInnerRows
have hnrm :=
  inf_memB_interpDKBodyGraph_eq ? V K hK hV ? y (.abs x P)
  (a sqcap lamDKVal V K (.abs x P)) hrows d e
have hinterp :
  interpDKRelVal ? V K hK hV
    (?.update hV ?.total y d) (.abs x P) e =
  lamDKVal V K (.abs x P) sqcap
    memB (opairB
      (interpDKBodyGraph ? V K hK hV
        (?.update hV ?.total y d) x P)
      (?.D.child e)) ?.Lam := by
  rw [interpDKRelVal_abs]
apply le_antisymm
* have h := hnrm.le.trans_eq hinterp
  exact le_inf inf_le_left (h.trans inf_le_right)
* have h : a sqcap lamDKVal V K (.abs x P) sqcap
  memB (opairB
    (interpDKBodyGraph ? V K hK hV
      (?.update hV ?.total y d) x P)
    (?.D.child e)) ?.Lam <=
  interpDKRelVal ? V K hK hV
    (?.update hV ?.total y d) (.abs x P) e := by
  rw [hinterp]
  exact le_inf (inf_le_left.trans inf_le_right) inf_le_right
exact h.trans hnrm.ge

/-- Off-diagonal, inner evaluations at a shared argument are monotone in
the outer variable, via the outer body graph. -/
theorem interpDKAbsFamily_eval_mono
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top)
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?.D))
  (y x : V.idx) (P : LamDK V.idx K.idx) (a : A)
  (hOuter : forall z, a <= isScottContinuousB
    (interpDKBodyGraph ? V K hK hV (?.update hV ?.total x z) y P)
    ?.D ?.D ?.R ?.R)
  (hInnerRows : forall d, forall e, IsRelElementAt ?.D a
    (interpDKRelVal ? V K hK hV
      ((?.update hV ?.total y d).update hV ?.total x e) P))
  (hOuterRows : forall z, forall d, IsRelElementAt ?.D a
    (interpDKRelVal ? V K hK hV
      ((?.update hV ?.total x z).update hV ?.total y d) P))
  (d d' e w w' : ?.D.idx) :
  ((oid V).eq x y)? sqcap a sqcap
    relB ?.R (?.D.child d) (?.D.child d') sqcap
    memB (opairB (?.D.child e) (?.D.child w))
      (interpDKBodyGraph ? V K hK hV
        (?.update hV ?.total y d) x P) sqcap

```



```

      memB (opairB (?D.child e) (?D.child w'))
      (interpDKBodyGraph ? V K hK hV
        (?update hV ?.total y d') x P) <=
      relB ?R (?D.child w) (?D.child w') := by
let Fd :=
  interpDKBodyGraph ? V K hK hV (?update hV ?.total y d) x P
let Fd' :=
  interpDKBodyGraph ? V K hK hV (?update hV ?.total y d') x P
let Ge :=
  interpDKBodyGraph ? V K hK hV (?update hV ?.total x e) y P
let t :=
  ((oid V).eq x y)? sqcap a sqcap
  relB ?R (?D.child d) (?D.child d') sqcap
  memB (opairB (?D.child e) (?D.child w)) Fd sqcap
  memB (opairB (?D.child e) (?D.child w')) Fd'
change t <= relB ?R (?D.child w) (?D.child w')
have htEq : t <= ((oid V).eq x y)? :=
  inf_le_left.trans (inf_le_left.trans
    (inf_le_left.trans inf_le_left))
have htA : t <= a :=
  inf_le_left.trans (inf_le_left.trans
    (inf_le_left.trans inf_le_right))
have htR : t <= relB ?R (?D.child d) (?D.child d') :=
  inf_le_left.trans (inf_le_left.trans inf_le_right)
have hFd : t <=
  memB (opairB (?D.child e) (?D.child w)) Fd :=
  inf_le_left.trans inf_le_right
have hFd' : t <=
  memB (opairB (?D.child e) (?D.child w')) Fd' :=
  inf_le_right
have hGd : t <=
  memB (opairB (?D.child d) (?D.child w)) Ge :=
  (interpDKAbsFamily_inner_le_outer ? V K hK hV ? y x P a
    hInnerRows hOuterRows d e w).trans' <|
  le_inf (le_inf htEq htA) hFd
have hGd' : t <=
  memB (opairB (?D.child d') (?D.child w')) Ge :=
  (interpDKAbsFamily_inner_le_outer ? V K hK hV ? y x P a
    hInnerRows hOuterRows d' e w').trans' <|
  le_inf (le_inf htEq htA) hFd'
exact (scottContinuous_apply_mono (hOuter e)
  (?D.child d) (?D.child d')
  (?D.child w) (?D.child w')).trans' <|
  le_inf (le_inf (le_inf htA hGd) hGd') htR

/-- Off-diagonal, the inner family is `Q`-monotone on displayed inputs. -/
theorem interpDKAbsFamily_relQ
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?D = top )
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?D))
  (y x : V.idx) (P : LamDK V.idx K.idx) (a : A)
  (hInner : forall d, a <= isScottContinuousB
    (interpDKBodyGraph ? V K hK hV (?update hV ?.total y d) x P)
    ?D ?D ?R ?R)
  (hOuter : forall z, a <= isScottContinuousB
    (interpDKBodyGraph ? V K hK hV (?update hV ?.total x z) y P)
    ?D ?D ?R ?R)
  (hInnerRows : forall d, forall e, IsRelElementAt ?D a
    (interpDKRelVal ? V K hK hV
      ((?.update hV ?.total y d).update hV ?.total x e) P))
  (hOuterRows : forall z, forall d, IsRelElementAt ?D a
    (interpDKRelVal ? V K hK hV

```

```

      ((?.update hV ?.total x z).update hV ?.total y d) P))
(d d' : ?.D.idx) :
((oid V).eq x y)? sqcap a sqcap
  relB ?.R (?.D.child d) (?.D.child d') <=
  relB ?.Q
    (interpDKBodyGraph ? V K hK hV (?.update hV ?.total y d) x P)
    (interpDKBodyGraph ? V K hK hV
      (?.update hV ?.total y d') x P) := by
let Fd :=
  interpDKBodyGraph ? V K hK hV (?.update hV ?.total y d) x P
let Fd' :=
  interpDKBodyGraph ? V K hK hV (?.update hV ?.total y d') x P
let t :=
  ((oid V).eq x y)? sqcap a sqcap
  relB ?.R (?.D.child d) (?.D.child d')
change t <= relB ?.Q Fd Fd'
have htEq : t <= ((oid V).eq x y)? :=
  inf_le_left.trans inf_le_left
have htA : t <= a := inf_le_left.trans inf_le_right
have htR : t <= relB ?.R (?.D.child d) (?.D.child d') :=
  inf_le_right
have hFC : t <= memB Fd ?.C :=
  htA.trans (interpDKAbsFamily_mem_mapSpace ? V K hK hV ? y x P a
    hInner d)
have hFC' : t <= memB Fd' ?.C :=
  htA.trans (interpDKAbsFamily_mem_mapSpace ? V K hK hV ? y x P a
    hInner d')
have hfun : t <= isFunctionB Fd ?.D ?.D :=
  (?.mem_mapSpace_le_function Fd).trans' hFC
have hfun' : t <= isFunctionB Fd' ?.D ?.D :=
  (?.mem_mapSpace_le_function Fd').trans' hFC'
have hsub : t <= subsetB Fd (prodB ?.D ?.D) :=
  hfun.trans (inf_le_left.trans inf_le_left)
have hsub' : t <= subsetB Fd' (prodB ?.D ?.D) :=
  hfun'.trans (inf_le_left.trans inf_le_left)
have hpw : t <= pointwiseLeB Fd Fd' ?.D ?.R := by
  unfold pointwiseLeB
  refine le_iInf fun s => le_iInf fun v => le_iInf fun v' => ?_
  rw [le_himp_iff]
let u :=
  t sqcap (memB s ?.D sqcap memB (opairB s v) Fd sqcap
    memB (opairB s v') Fd')
change u <= relB ?.R v v'
have huT : u <= t := inf_le_left
have huD : u <= memB s ?.D :=
  inf_le_right.trans (inf_le_left.trans inf_le_left)
have huF : u <= memB (opairB s v) Fd :=
  inf_le_right.trans (inf_le_left.trans inf_le_right)
have huF' : u <= memB (opairB s v') Fd' :=
  inf_le_right.trans inf_le_right
have hdec :
  u <= bigcup p : ?.D.idx x ?.D.idx,
    eqB (opairB s v)
      (opairB (?.D.child p.1) (?.D.child p.2)) sqcap
      memB (opairB (?.D.child p.1) (?.D.child p.2)) Fd :=
    (inf_memB_le_iSup_matrix (hsub := huT.trans hsub)
      (opairB s v)).trans' <|
    le_inf le_rfl huF
have hdec' :
  u <= bigcup q : ?.D.idx x ?.D.idx,
    eqB (opairB s v')
      (opairB (?.D.child q.1) (?.D.child q.2)) sqcap
      memB (opairB (?.D.child q.1) (?.D.child q.2)) Fd' :=

```

```

    (inf_memB_le_iSup_matrix (hsub := huT.trans hsub')
      (opairB s v')).trans' <|
    le_inf le_rfl huF'
  refine (le_inf (le_inf le_rfl hdec) hdec').trans ?_
  rw [inf_iSup_eq (a := A)]
  refine iSup_le fun q => ?_
  rw [inf_right_comm, inf_iSup_eq (a := A)]
  refine iSup_le fun p => ?_
  let r :=
    u sqcap
    (eqB (opairB s v')
      (opairB (?D.child q.1) (?D.child q.2)) sqcap
      memB (opairB (?D.child q.1) (?D.child q.2)) Fd') sqcap
    (eqB (opairB s v)
      (opairB (?D.child p.1) (?D.child p.2)) sqcap
      memB (opairB (?D.child p.1) (?D.child p.2)) Fd)
  change r <= relB ?R v v'
  have hrU : r <= u := inf_le_left.trans inf_le_left
  have hrp : r <=
    memB (opairB (?D.child p.1) (?D.child p.2)) Fd :=
    inf_le_right.trans inf_le_right
  have hrq : r <=
    memB (opairB (?D.child q.1) (?D.child q.2)) Fd' :=
    inf_le_left.trans (inf_le_right.trans inf_le_right)
  have hop : r <=
    eqB (opairB s v)
    (opairB (?D.child p.1) (?D.child p.2)) :=
    inf_le_right.trans inf_le_left
  have hoq : r <=
    eqB (opairB s v')
    (opairB (?D.child q.1) (?D.child q.2)) :=
    inf_le_left.trans (inf_le_right.trans inf_le_left)
  have hvp : r <= eqB v (?D.child p.2) := by
    rw [eqB_opairB] at hop
    exact hop.trans inf_le_right
  have hvq : r <= eqB v' (?D.child q.2) := by
    rw [eqB_opairB] at hoq
    exact hoq.trans inf_le_right
  have hsp : r <= eqB s (?D.child p.1) := by
    rw [eqB_opairB] at hop
    exact hop.trans inf_le_left
  have hsq : r <= eqB s (?D.child q.1) := by
    rw [eqB_opairB] at hoq
    exact hoq.trans inf_le_left
  have heq : r <= eqB (?D.child p.1) (?D.child q.1) :=
    (eqB_trans (?D.child p.1) s (?D.child q.1)).trans' <|
    le_inf (by rw [eqB_comm]; exact hsp) hsq
  have hsameArg : r <=
    memB (opairB (?D.child p.1) (?D.child q.2)) Fd' :=
    (memB_opairB_congr Fd' (?D.child q.1) (?D.child p.1)
      (?D.child q.2) (?D.child q.2)).trans' <|
    le_inf (le_inf
      (heq.trans_eq (eqB_comm (?D.child p.1) (?D.child q.1)))
      (le_top.trans (eqB_self (A := A) (?D.child q.2)).ge))
    hrq
  have hmono : r <=

```

Lean 4 source (lines 4401–4800)

```

  relB ?R (?D.child p.2) (?D.child q.2) :=
  (interpDKAbsFamily_eval_mono ? V K hK hV ? y x P a
    hOuter hInnerRows hOuterRows d d' p.1 p.2 q.2).trans' <|
  le_inf (le_inf (le_inf (le_inf
    (hrU.trans (huT.trans htEq))

```

```

      (hrU.trans (huT.trans htA)))
    (hrU.trans (huT.trans htR)))
  hrp) hsameArg
exact (relB_congr ?R (?D.child p.2) v (?D.child q.2) v').trans' <|
  le_inf (le_inf
    (hvp.trans_eq (eqB_comm v (?D.child p.2)))
    (hvw.trans_eq (eqB_comm v' (?D.child q.2))))
  hmono
exact (?pointwise_le_relQ Fd Fd').trans' <|
  le_inf (le_inf hFC hFC') hpw

/-- Off-diagonal monotonicity of the abs body graph. -/
theorem interpDKBodyGraph_abs_apply_mono
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?D = top )
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?D))
  (y x : V.idx) (P : LamDK V.idx K.idx) (a : A)
  (hInner : forall d, a <= isScottContinuousB
    (interpDKBodyGraph ? V K hK hV (?update hV ?.total y d) x P)
    ?D ?D ?R ?R)
  (hOuter : forall z, a <= isScottContinuousB
    (interpDKBodyGraph ? V K hK hV (?update hV ?.total x z) y P)
    ?D ?D ?R ?R)
  (hInnerRows : forall d, forall e, IsRelElementAt ?D a
    (interpDKRelVal ? V K hK hV
      ((?.update hV ?.total y d).update hV ?.total x e) P))
  (hOuterRows : forall z, forall d, IsRelElementAt ?D a
    (interpDKRelVal ? V K hK hV
      ((?.update hV ?.total x z).update hV ?.total y d) P))
  (u u' v v' : AName.{u} A) :
  ((oid V).eq x y)? sqcap a sqcap lamDKVal V K (.abs x P) sqcap
    memB (opairB u v)
    (interpDKBodyGraph ? V K hK hV ? y (.abs x P)) sqcap
    memB (opairB u' v')
    (interpDKBodyGraph ? V K hK hV ? y (.abs x P)) sqcap
    relB ?R u u' <=
    relB ?R v v' := by
  let Fabs := interpDKBodyGraph ? V K hK hV ? y (.abs x P)
  let b := a sqcap lamDKVal V K (.abs x P)
  have hfun : b <= isFunctionB Fabs ?D ?D :=
    interpDKBodyGraph_abs_isFunctionB ? V K hK hV ? y x P a
    hInner hInnerRows
  have hrows :=
    interpDKBodyGraph_abs_rows_isRelElementAt ? V K hK hV ? y x P a
    hInner hInnerRows
  let t :=
    ((oid V).eq x y)? sqcap a sqcap lamDKVal V K (.abs x P) sqcap
    memB (opairB u v) Fabs sqcap memB (opairB u' v') Fabs sqcap
    relB ?R u u'
  change t <= relB ?R v v'
  have htEq : t <= ((oid V).eq x y)? :=
    inf_le_left.trans (inf_le_left.trans
      (inf_le_left.trans (inf_le_left.trans inf_le_left)))
  have htA : t <= a :=
    inf_le_left.trans (inf_le_left.trans
      (inf_le_left.trans (inf_le_left.trans inf_le_right)))
  have htLam : t <= lamDKVal V K (.abs x P) :=
    inf_le_left.trans (inf_le_left.trans
      (inf_le_left.trans inf_le_right))
  have htB : t <= b := le_inf htA htLam
  have htuv : t <= memB (opairB u v) Fabs :=
    inf_le_left.trans (inf_le_left.trans inf_le_right)

```

```

have htuv'v' : t <= memB (opairB u' v') Fabs :=
  inf_le_left.trans inf_le_right
have htR : t <= relB ?R u u' := inf_le_right
have hdec :
  t <= bigcup p : ?D.idx x ?D.idx,
    eqB (opairB u v)
      (opairB (?D.child p.1) (?D.child p.2)) sqcap
    memB (opairB (?D.child p.1) (?D.child p.2)) Fabs :=
  (inf_memB_le_iSup_matrix (hsub := (htB.trans hfun).trans
    (inf_le_left.trans inf_le_left)) (opairB u v)).trans' <|
    le_inf le_rfl htuv
have hdec' :
  t <= bigcup q : ?D.idx x ?D.idx,
    eqB (opairB u' v')
      (opairB (?D.child q.1) (?D.child q.2)) sqcap
    memB (opairB (?D.child q.1) (?D.child q.2)) Fabs :=
  (inf_memB_le_iSup_matrix (hsub := (htB.trans hfun).trans
    (inf_le_left.trans inf_le_left)) (opairB u' v')).trans' <|
    le_inf le_rfl htuv'v'
refine (le_inf (le_inf le_rfl hdec) hdec').trans ?_
rw [inf_iSup_eq (a := A)]
refine iSup_le fun q => ?_
rw [inf_right_comm, inf_iSup_eq (a := A)]
refine iSup_le fun p => ?_
let s :=
  t sqcap
  (eqB (opairB u' v')
    (opairB (?D.child q.1) (?D.child q.2)) sqcap
    memB (opairB (?D.child q.1) (?D.child q.2)) Fabs) sqcap
  (eqB (opairB u v)
    (opairB (?D.child p.1) (?D.child p.2)) sqcap
    memB (opairB (?D.child p.1) (?D.child p.2)) Fabs)
change s <= relB ?R v v'
have hsT : s <= t := inf_le_left.trans inf_le_left
have hsp : s <=
  memB (opairB (?D.child p.1) (?D.child p.2)) Fabs :=
  inf_le_right.trans inf_le_right
have hsq : s <=
  memB (opairB (?D.child q.1) (?D.child q.2)) Fabs :=
  inf_le_left.trans (inf_le_right.trans inf_le_right)
have hop : s <=
  eqB (opairB u v)
    (opairB (?D.child p.1) (?D.child p.2)) :=
  inf_le_right.trans inf_le_left
have hoq : s <=
  eqB (opairB u' v')
    (opairB (?D.child q.1) (?D.child q.2)) :=
  inf_le_left.trans (inf_le_right.trans inf_le_left)
have hup : s <= eqB u (?D.child p.1) := by
  rw [eqB_opairB] at hop
  exact hop.trans inf_le_left
have huq : s <= eqB u' (?D.child q.1) := by
  rw [eqB_opairB] at hoq
  exact hoq.trans inf_le_left
have hvp : s <= eqB v (?D.child p.2) := by
  rw [eqB_opairB] at hop
  exact hop.trans inf_le_right
have hvq : s <= eqB v' (?D.child q.2) := by
  rw [eqB_opairB] at hoq
  exact hoq.trans inf_le_right
have hRpq : s <= relB ?R (?D.child p.1) (?D.child q.1) :=
  (relB_congr ?R u (?D.child p.1) u' (?D.child q.1)).trans' <|
  le_inf (le_inf hup huq) (hsT.trans htR)

```

```

have hQ : s <=
  relB ?.Q
    (interpDKBodyGraph ? V K hK hV
      (? .update hV ?.total y p.1) x P)
    (interpDKBodyGraph ? V K hK hV
      (? .update hV ?.total y q.1) x P) :=
  (interpDKAbsFamily_relQ ? V K hK hV ? y x P a
    hInner hOuter hInnerRows hOuterRows p.1 q.1).trans' <|
  le_inf (le_inf (hsT.trans htEq) (hsT.trans htA)) hRpq
have hmemp : s <=
  memB (opairB
    (interpDKBodyGraph ? V K hK hV
      (? .update hV ?.total y p.1) x P)
    (? .D.child p.2)) ?.Lam := by
  have h :=
    (interpDKBodyGraph_abs_mem_eq_lam ? V K hK hV ? y x P a
      hInner hInnerRows p.1 p.2).le
  exact h.trans' (le_inf (hsT.trans htB) hsp) |>.trans inf_le_right
have hmemq : s <=
  memB (opairB
    (interpDKBodyGraph ? V K hK hV
      (? .update hV ?.total y q.1) x P)
    (? .D.child q.2)) ?.Lam := by
  have h :=
    (interpDKBodyGraph_abs_mem_eq_lam ? V K hK hV ? y x P a
      hInner hInnerRows q.1 q.2).le
  exact h.trans' (le_inf (hsT.trans htB) hsq) |>.trans inf_le_right
have hLam : ( top : A) <=
  isScottContinuousB ?.Lam ?.C ?.D ?.Q ?.R :=
  le_top.trans ?.lam_continuous.ge
have hpq : s <= relB ?.R (? .D.child p.2) (? .D.child q.2) :=
  (scottContinuous_apply_mono hLam
    (interpDKBodyGraph ? V K hK hV
      (? .update hV ?.total y p.1) x P)
    (interpDKBodyGraph ? V K hK hV
      (? .update hV ?.total y q.1) x P)
    (? .D.child p.2) (? .D.child q.2)).trans' <|
  le_inf (le_inf (le_inf (le_top.trans le_top) hmemp) hmemp) hQ
exact (relB_congr ?.R (? .D.child p.2) v (? .D.child q.2) v').trans' <|
  le_inf (le_inf
    (hvp.trans_eq (eqB_comm v (? .D.child p.2)))
    (hvq.trans_eq (eqB_comm v' (? .D.child q.2))))
  hpq

/-- Inner body graphs respect equality of the outer argument. -/
theorem interpDKAbsFamily_eqB_of_arg
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top )
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?.D))
  (y x : V.idx) (d d' : ?.D.idx) (P : LamDK V.idx K.idx) :
  (oid ?.D).eq d d' <=
    eqB (interpDKBodyGraph ? V K hK hV (? .update hV ?.total y d) x P)
      (interpDKBodyGraph ? V K hK hV
        (? .update hV ?.total y d') x P) := by
  let body (w : ?.D.idx) :=
    interpDKBodyGraph ? V K hK hV (? .update hV ?.total y w) x P
  have h? : RelFun.IsPointwiseFamily (oid ?.D)
    (fun w => ?.update hV ?.total y w) :=
    RelFun.isPointwiseFamily_update ? hV ?.total y
  have htransport : forall w_1 w_2 p, (oid ?.D).eq w_1 w_2 sqcap
    (body w_1).val p <= (body w_2).val p := by
    intro w_1 w_2 p

```

```

let replacement : ?.D.idx -> ?.D.idx := fun _ => p.1
have hrepl : APoset.Functional (oid ?.D) (oid ?.D) replacement := by
  intro z_1 z_2
  change (oid ?.D).eq z_1 z_2 <= (oid ?.D).eps p.1
  rw [?.total p.1]
  exact le_top
have hupd := h?.update hV ?.total x replacement hrepl
exact interpDKRelVal_isPointwiseFamily ? V K hK hV
  (oid ?.D) (fun w => (?.update hV ?.total y w).update hV ?.total x p.1)
  hupd P w_1 w_2 p.2
exact le_eqB_mk_of_le_val
  (fun p : ?.D.idx x ?.D.idx =>
    opairB (?.D.child p.1) (?.D.child p.2))
  (body d).val (body d').val ((oid ?.D).eq d d')
  (fun p => htransport d d' p)
  (fun p => by
    have h := htransport d' d p
    rwa [(oid ?.D).symm d' d] at h)

/-- The graph of the inner family `d |-> P??[y:=d]` as a map `D -> C`. -/
noncomputable def interpDKAbsFamilyGraph
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top )
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?.D))
  (y x : V.idx) (P : LamDK V.idx K.idx) : AName.{u} A :=
mk ?.D.idx
  (fun d =>
    opairB (?.D.child d)
      (interpDKBodyGraph ? V K hK hV (?.update hV ?.total y d) x P))
  (fun _ => top )

theorem memB_interpDKAbsFamilyGraph
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top )
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?.D))
  (y x : V.idx) (P : LamDK V.idx K.idx)
  (u G : AName.{u} A) :
memB (opairB u G)
  (interpDKAbsFamilyGraph ? V K hK hV ? y x P) =
  bigcup d : ?.D.idx,
  eqB u (?.D.child d) sqcap
  eqB G
  (interpDKBodyGraph ? V K hK hV
    (?.update hV ?.total y d) x P) := by
unfold interpDKAbsFamilyGraph
rw [memB_mk]
refine iSup_congr fun d => ?_
rw [eqB_opairB, inf_top_eq]

/-- Displayed family-graph edges recover the inner body graph. -/
theorem memB_interpDKAbsFamilyGraph_child
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top )
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?.D))
  (y x : V.idx) (P : LamDK V.idx K.idx) (d : ?.D.idx) :
memB (opairB (?.D.child d)
  (interpDKBodyGraph ? V K hK hV (?.update hV ?.total y d) x P))
  (interpDKAbsFamilyGraph ? V K hK hV ? y x P) = top := by
rw [memB_interpDKAbsFamilyGraph]
refine top_unique (le_iSup_of_le d ?_)

```

```

rw [eqB_self, eqB_self, top_inf_eq]

/-- The inner family graph is a degree-local function `D -> C`. -/
theorem interpDKAbsFamilyGraph_le_isFunctionB
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top )
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?.D))
  (y x : V.idx) (P : LamDK V.idx K.idx) (a : A)
  (hInner : forall d, a <= isScottContinuousB
    (interpDKBodyGraph ? V K hK hV (? .update hV ?.total y d) x P)
    ?.D ?.D ?.R ?.R) :
  a <= isFunctionB
    (interpDKAbsFamilyGraph ? V K hK hV ? y x P) ?.D ?.C := by
let Fg := interpDKAbsFamilyGraph ? V K hK hV ? y x P
unfold isFunctionB
refine le_inf (le_inf ?_ ?_) ?_
* unfold interpDKAbsFamilyGraph
  rw [subsetB_mk]
  refine le_iInf fun d => ?_
  rw [le_himp_iff, memB_opairB_prodB]
  have hD : memB (?.D.child d) ?.D = top := by
    rw [ <- oid_eps]
    exact ?.total d
  rw [hD, top_inf_eq]
  exact inf_le_left.trans
    (interpDKAbsFamily_mem_mapSpace ? V K hK hV ? y x P a hInner d)
* refine le_iInf fun u => le_iInf fun G => le_iInf fun G' => ?_
  rw [le_himp_iff]
  let t0 :=
    a sqcap
      (memB (opairB u G)
        (interpDKAbsFamilyGraph ? V K hK hV ? y x P) sqcap
        memB (opairB u G')
          (interpDKAbsFamilyGraph ? V K hK hV ? y x P)))
  change t0 <= eqB G G'
  have hdec :
    t0 <= bigcup d : ?.D.idx,
      eqB u (?.D.child d) sqcap
        eqB G
        (interpDKBodyGraph ? V K hK hV
          (? .update hV ?.total y d) x P) :=
    (inf_le_right.trans inf_le_left).trans_eq
      (memB_interpDKAbsFamilyGraph ? V K hK hV ? y x P u G)
  have hdec' :
    t0 <= bigcup d' : ?.D.idx,
      eqB u (?.D.child d') sqcap
        eqB G'
        (interpDKBodyGraph ? V K hK hV
          (? .update hV ?.total y d') x P) :=
    (inf_le_right.trans inf_le_right).trans_eq
      (memB_interpDKAbsFamilyGraph ? V K hK hV ? y x P u G')
  refine (le_inf (le_inf le_rfl hdec) hdec').trans ?_
  rw [inf_iSup_eq (a := A)]
  refine iSup_le fun d' => ?_
  rw [inf_right_comm, inf_iSup_eq (a := A)]
  refine iSup_le fun d => ?_
  let t :=
    t0 sqcap
      (eqB u (?.D.child d') sqcap
        eqB G'
        (interpDKBodyGraph ? V K hK hV
          (? .update hV ?.total y d') x P)) sqcap

```



```

      (eqB u (?.D.child d) sqcap
        eqB G
          (interpDKBodyGraph ? V K hK hV
            (?.update hV ?.total y d) x P))
change t <= eqB G G'
have hdd' : t <= (oid ?.D).eq d d' := by
  rw [oid_eq_of_total ?.D ?.total]
  exact (eqB_trans (?.D.child d) u (?.D.child d')).trans' <|
    le_inf (by
      rw [eqB_comm]
      exact inf_le_right.trans inf_le_left)
      (inf_le_left.trans (inf_le_right.trans inf_le_left))
have hbody :=
  interpDKAbsFamily_eqB_of_arg ? V K hK hV ? y x d d' P
have hGG' : t <=
  eqB
    (interpDKBodyGraph ? V K hK hV
      (?.update hV ?.total y d) x P)
    (interpDKBodyGraph ? V K hK hV
      (?.update hV ?.total y d') x P) :=
  hdd'.trans hbody
exact (eqB_trans G
  (interpDKBodyGraph ? V K hK hV
    (?.update hV ?.total y d) x P) G').trans' <|
  le_inf (inf_le_right.trans inf_le_right)
    ((eqB_trans
      (interpDKBodyGraph ? V K hK hV
        (?.update hV ?.total y d) x P)
      (interpDKBodyGraph ? V K hK hV
        (?.update hV ?.total y d') x P)
      G').trans' <|
      le_inf hGG'
        (by
          rw [eqB_comm]
          exact inf_le_left.trans (inf_le_right.trans inf_le_right)))
* refine le_iInf fun u => ?_
  rw [le_himp_iff]
  have hfunD : a sqcap memB u ?.D <=
    bigcup d : ?.D.idx, eqB u (?.D.child d) := by
    rw [memB_eq (x := u) (y := ?.D), inf_iSup_eq]
    refine iSup_le fun d => le_iSup_of_le d ?_
    exact inf_le_right.trans inf_le_left
  refine (le_inf le_rfl hfunD).trans ?_
  rw [inf_iSup_eq (a := A)]
  refine iSup_le fun d => le_iSup_of_le
    (interpDKBodyGraph ? V K hK hV
      (?.update hV ?.total y d) x P) ?_
  rw [memB_interpDKAbsFamilyGraph]
  refine le_iSup_of_le d ?_
  exact le_inf inf_le_right
    (le_top.trans
      (eqB_self (A := A)
        (interpDKBodyGraph ? V K hK hV
          (?.update hV ?.total y d) x P)).ge)

/-- Off-diagonal, the inner family graph is `Q`-monotone. -/
theorem interpDKAbsFamilyGraph_apply_mono
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top )
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?.D))
  (y x : V.idx) (P : LamDK V.idx K.idx) (a : A)
  (hInner : forall d, a <= isScottContinuousB

```

```

      (interpDKBodyGraph ? V K hK hV (? .update hV ? .total y d) x P)
      ? .D ? .D ? .R ? .R)
(hOuter : forall z, a <= isScottContinuousB
  (interpDKBodyGraph ? V K hK hV (? .update hV ? .total x z) y P)
  ? .D ? .D ? .R ? .R)
(hInnerRows : forall d, forall e, IsRelElementAt ? .D a
  (interpDKRelVal ? V K hK hV
    ((? .update hV ? .total y d) .update hV ? .total x e) P))
(hOuterRows : forall z, forall d, IsRelElementAt ? .D a
  (interpDKRelVal ? V K hK hV
    ((? .update hV ? .total x z) .update hV ? .total y d) P))
(u u' G G' : AName.{u} A) :
((oid V).eq x y)? sqcap a sqcap
  memB (opairB u G)
    (interpDKAbsFamilyGraph ? V K hK hV ? y x P) sqcap
  memB (opairB u' G')
    (interpDKAbsFamilyGraph ? V K hK hV ? y x P) sqcap

```

Lean 4 source (lines 4801–5200)

```

      relB ? .R u u' <=
      relB ? .Q G G' := by
let t0 :=
  ((oid V).eq x y)? sqcap a sqcap
  memB (opairB u G)
    (interpDKAbsFamilyGraph ? V K hK hV ? y x P) sqcap
  memB (opairB u' G')
    (interpDKAbsFamilyGraph ? V K hK hV ? y x P) sqcap
  relB ? .R u u'
change t0 <= relB ? .Q G G'
have htEq : t0 <= ((oid V).eq x y)? :=
  inf_le_left.trans (inf_le_left.trans
    (inf_le_left.trans inf_le_left))
have htA : t0 <= a :=
  inf_le_left.trans (inf_le_left.trans
    (inf_le_left.trans inf_le_right))
have htR : t0 <= relB ? .R u u' := inf_le_right
have hdec :
  t0 <= bigcup d : ? .D.idx,
    eqB u (? .D.child d) sqcap
    eqB G
    (interpDKBodyGraph ? V K hK hV
      (? .update hV ? .total y d) x P) :=
  (inf_le_left.trans (inf_le_left.trans inf_le_right)).trans_eq
  (memB_interpDKAbsFamilyGraph ? V K hK hV ? y x P u G)
have hdec' :
  t0 <= bigcup d' : ? .D.idx,
    eqB u' (? .D.child d') sqcap
    eqB G'
    (interpDKBodyGraph ? V K hK hV
      (? .update hV ? .total y d') x P) :=
  (inf_le_left.trans inf_le_right).trans_eq
  (memB_interpDKAbsFamilyGraph ? V K hK hV ? y x P u' G')
refine (le_inf (le_inf le_rfl hdec) hdec').trans ?_
rw [inf_iSup_eq (a := A)]
refine iSup_le fun d' => ?_
rw [inf_right_comm, inf_iSup_eq (a := A)]
refine iSup_le fun d => ?_
let s :=
  t0 sqcap
  (eqB u' (? .D.child d') sqcap
    eqB G'
    (interpDKBodyGraph ? V K hK hV
      (? .update hV ? .total y d') x P)) sqcap

```

```

      (eqB u (?..D.child d) sqcap
      eqB G
      (interpDKBodyGraph ? V K hK hV
      (?..update hV ?..total y d) x P))
change s <= relB ?..Q G G'
have hsT : s <= t0 := inf_le_left.trans inf_le_left
have hup : s <= eqB u (?..D.child d) :=
  inf_le_right.trans inf_le_left
have huq : s <= eqB u' (?..D.child d') :=
  inf_le_left.trans (inf_le_right.trans inf_le_left)
have hGp : s <=
  eqB G
  (interpDKBodyGraph ? V K hK hV
  (?..update hV ?..total y d) x P) :=
  inf_le_right.trans inf_le_right
have hGq : s <=
  eqB G'
  (interpDKBodyGraph ? V K hK hV
  (?..update hV ?..total y d') x P) :=
  inf_le_left.trans (inf_le_right.trans inf_le_right)
have hRpq : s <= relB ?..R (?..D.child d) (?..D.child d') :=
  (relB_congr ?..R u (?..D.child d) u' (?..D.child d')).trans' <|
  le_inf (le_inf hup huq) (hsT.trans htR)
have hQ : s <=
  relB ?..Q
  (interpDKBodyGraph ? V K hK hV
  (?..update hV ?..total y d) x P)
  (interpDKBodyGraph ? V K hK hV
  (?..update hV ?..total y d') x P) :=
  (interpDKAbsFamily_relQ ? V K hK hV ? y x P a
  hInner hOuter hInnerRows hOuterRows d d').trans' <|
  le_inf (le_inf (hsT.trans htEq) (hsT.trans htA)) hRpq
exact (relB_congr ?..Q
  (interpDKBodyGraph ? V K hK hV
  (?..update hV ?..total y d) x P) G
  (interpDKBodyGraph ? V K hK hV
  (?..update hV ?..total y d') x P) G').trans' <|
  le_inf (le_inf
    (hGp.trans_eq (eqB_comm G
      (interpDKBodyGraph ? V K hK hV
      (?..update hV ?..total y d) x P)))
    (hGq.trans_eq (eqB_comm G'
      (interpDKBodyGraph ? V K hK hV
      (?..update hV ?..total y d') x P))))
  hQ

```

/-- The inner family sends directed subsets of `D` to directed subsets of `C`. -/

```

theorem interpDKAbsFamilyGraph_image_directed
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?..D = top )
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?..D))
  (y x : V.idx) (P : LamDK V.idx K.idx) (a : A)
  (hInner : forall d, a <= isScottContinuousB
    (interpDKBodyGraph ? V K hK hV (?..update hV ?..total y d) x P)
    ?..D ?..D ?..R ?..R)
  (hOuter : forall z, a <= isScottContinuousB
    (interpDKBodyGraph ? V K hK hV (?..update hV ?..total x z) y P)
    ?..D ?..D ?..R ?..R)
  (hInnerRows : forall d, forall e, IsRelElementAt ?..D a
    (interpDKRelVal ? V K hK hV
      ((?..update hV ?..total y d).update hV ?..total x e) P))
  (hOuterRows : forall z, forall d, IsRelElementAt ?..D a

```

```

      (interpDKRelVal ? V K hK hV
        ((?.update hV ?.total x z).update hV ?.total y d) P))
    (S : AName.{u} A) :
    ((oid V).eq x y)? sqcap a sqcap isDirectedRelB S ?.D ?.R <=
      isDirectedRelB
        (graphImageB
          (interpDKAbsFamilyGraph ? V K hK hV ? y x P) S ?.C)
      ?.C ?.Q :=
isDirectedRelB_graphImageB
  (interpDKAbsFamilyGraph ? V K hK hV ? y x P)
  S ?.D ?.C ?.R ?.Q
  (inf_le_right.trans
    (interpDKAbsFamilyGraph_le_isFunctionB ? V K hK hV ? y x P a
      hInner))
  (fun u u' G G' =>
    interpDKAbsFamilyGraph_apply_mono ? V K hK hV ? y x P a
      hInner hOuter hInnerRows hOuterRows u u' G G')

/-- A displayed inner graph is a `Q`-upper bound of the family image. -/
theorem interpDKAbsFamily_image_upper
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top )
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?.D))
  (y x : V.idx) (P : LamDK V.idx K.idx) (a : A)
  (hInner : forall d, a <= isScottContinuousB
    (interpDKBodyGraph ? V K hK hV (?.update hV ?.total y d) x P)
    ?.D ?.D ?.R ?.R)
  (hOuter : forall z, a <= isScottContinuousB
    (interpDKBodyGraph ? V K hK hV (?.update hV ?.total x z) y P)
    ?.D ?.D ?.R ?.R)
  (hInnerRows : forall d, forall e, IsRelElementAt ?.D a
    (interpDKRelVal ? V K hK hV
      ((?.update hV ?.total y d).update hV ?.total x e) P))
  (hOuterRows : forall z, forall d, IsRelElementAt ?.D a
    (interpDKRelVal ? V K hK hV
      ((?.update hV ?.total x z).update hV ?.total y d) P))
  (S : AName.{u} A) (d : ?.D.idx) (G : AName.{u} A) :
  ((oid V).eq x y)? sqcap a sqcap
    isUpperBoundRelB (?.D.child d) S ?.R sqcap
    memB G
    (graphImageB
      (interpDKAbsFamilyGraph ? V K hK hV ? y x P) S ?.C) <=
    relB ?.Q G
    (interpDKBodyGraph ? V K hK hV (?.update hV ?.total y d) x P) := by
let Fg := interpDKAbsFamilyGraph ? V K hK hV ? y x P
let Fd :=
  interpDKBodyGraph ? V K hK hV (?.update hV ?.total y d) x P
let t :=
  ((oid V).eq x y)? sqcap a sqcap
    isUpperBoundRelB (?.D.child d) S ?.R sqcap
    memB G (graphImageB Fg S ?.C)
change t <= relB ?.Q G Fd
have htEq : t <= ((oid V).eq x y)? :=
  inf_le_left.trans (inf_le_left.trans inf_le_left)
have htA : t <= a :=
  inf_le_left.trans (inf_le_left.trans inf_le_right)
have htUb : t <= isUpperBoundRelB (?.D.child d) S ?.R :=
  inf_le_left.trans inf_le_right
have htG : t <= memB G (graphImageB Fg S ?.C) := inf_le_right
rw [memB_graphImageB] at htG
have htGC : t <= memB G ?.C := htG.trans inf_le_left
have hdec : t <= bigcup w : AName A,

```

```

    memB w S sqcap memB (opairB w G) Fg :=
    htG.trans inf_le_right
  refine (le_inf le_rfl hdec).trans ?_
  rw [inf_iSup_eq (a := A)]
  refine iSup_le fun w => ?_
  let s := t sqcap (memB w S sqcap memB (opairB w G) Fg)
  change s <= relB ?Q G Fd
  have hsT : s <= t := inf_le_left
  have hwS : s <= memB w S := inf_le_right.trans inf_le_left
  have hwG : s <= memB (opairB w G) Fg := inf_le_right.trans inf_le_right
  have hwd : s <= relB ?R w (?D.child d) :=
    (isUpperBoundRelB_apply (?D.child d) S ?R w).trans' <|
    le_inf (hsT.trans htUb) hwS
  have hFd : s <= memB (opairB (?D.child d) Fd) Fg :=
    le_top.trans (memB_interpDKAbsFamilyGraph_child
      ? V K hK hV ? y x P d).ge
  exact (interpDKAbsFamilyGraph_apply_mono ? V K hK hV ? y x P a
    hInner hOuter hInnerRows hOuterRows w (?D.child d) G Fd).trans' <|
    le_inf (le_inf (le_inf (le_inf
      (hsT.trans htEq) (hsT.trans htA)) hwG) hFd) hwd

/-- Off-diagonal, a displayed inner value is the outer image-supremum. -/
theorem interpDKAbsFamily_inner_mapsToSup_outer
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?D = top )
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?D))
  (y x : V.idx) (P : LamDK V.idx K.idx) (a : A)
  (hOuter : forall z, a <= isScottContinuousB
    (interpDKBodyGraph ? V K hK hV (?update hV ?total x z) y P)
    ?D ?D ?R ?R)
  (hInnerRows : forall d, forall e, IsRelElementAt ?D a
    (interpDKRelVal ? V K hK hV
      ((?update hV ?total y d).update hV ?total x e) P))
  (hOuterRows : forall z, forall d, IsRelElementAt ?D a
    (interpDKRelVal ? V K hK hV
      ((?update hV ?total x z).update hV ?total y d) P))
  (S : AName.{u} A) (d e w : ?D.idx) :
  ((oid V).eq x y)? sqcap a sqcap
    isDirectedRelB S ?D ?R sqcap
    isSupRelB (?D.child d) S ?R sqcap
    memB (opairB (?D.child e) (?D.child w))
    (interpDKBodyGraph ? V K hK hV
      (?update hV ?total y d) x P) <=
  mapsToSupB
    (interpDKBodyGraph ? V K hK hV (?update hV ?total x e) y P)
    S (?D.child w) ?R := by
  let Fd :=
    interpDKBodyGraph ? V K hK hV (?update hV ?total y d) x P
  let Ge :=
    interpDKBodyGraph ? V K hK hV (?update hV ?total x e) y P
  let t :=
    ((oid V).eq x y)? sqcap a sqcap
    isDirectedRelB S ?D ?R sqcap
    isSupRelB (?D.child d) S ?R sqcap
    memB (opairB (?D.child e) (?D.child w)) Fd
  change t <= mapsToSupB Ge S (?D.child w) ?R
  have htEq : t <= ((oid V).eq x y)? :=
    inf_le_left.trans (inf_le_left.trans
      (inf_le_left.trans inf_le_left))
  have htA : t <= a :=
    inf_le_left.trans (inf_le_left.trans
      (inf_le_left.trans inf_le_right))

```

```

have htDir : t <= isDirectedRelB S ?.D ?.R :=
  inf_le_left.trans (inf_le_left.trans inf_le_right)
have htSup : t <= isSupRelB (?.D.child d) S ?.R :=
  inf_le_left.trans inf_le_right
have htmem : t <= memB (opairB (?.D.child e) (?.D.child w)) Fd :=
  inf_le_right
have hGe : t <= memB (opairB (?.D.child d) (?.D.child w)) Ge :=
  (interpDKAbsFamily_inner_le_outer ? V K hK hV ? y x P a
    hInnerRows hOuterRows d e w).trans' <|
  le_inf (le_inf htEq htA) htmem
exact (scottContinuous_mapsToSup (hOuter e) S
  (?.D.child d) (?.D.child w)).trans' <|
  le_inf (le_inf (le_inf htA htDir) htSup) hGe

/-- Off-diagonal outer edges at a displayed source transport to inner
edges, for an arbitrary target name. -/
theorem interpDKAbsFamily_outer_mem_le_inner
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top)
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?.D))
  (y x : V.idx) (P : LamDK V.idx K.idx) (a : A)
  (hInnerRows : forall d, forall e, IsRelElementAt ?.D a
    (interpDKRelVal ? V K hK hV
      ((?.update hV ?.total y d).update hV ?.total x e) P))
  (hOuter : forall z, a <= isScottContinuousB
    (interpDKBodyGraph ? V K hK hV (?.update hV ?.total x z) y P)
    ?.D ?.D ?.R ?.R)
  (hOuterRows : forall z, forall d, IsRelElementAt ?.D a
    (interpDKRelVal ? V K hK hV
      ((?.update hV ?.total x z).update hV ?.total y d) P))
  (d e : ?.D.idx) (w : AName.{u} A) :
  ((oid V).eq x y)? sqcap a sqcap
    memB (opairB (?.D.child d) w)
      (interpDKBodyGraph ? V K hK hV
        (?.update hV ?.total x e) y P) <=
    memB (opairB (?.D.child e) w)
      (interpDKBodyGraph ? V K hK hV
        (?.update hV ?.total y d) x P) := by
let Ge :=
  interpDKBodyGraph ? V K hK hV (?.update hV ?.total x e) y P
let Fd :=
  interpDKBodyGraph ? V K hK hV (?.update hV ?.total y d) x P
let t :=
  ((oid V).eq x y)? sqcap a sqcap memB (opairB (?.D.child d) w) Ge
change t <= memB (opairB (?.D.child e) w) Fd
have htEq : t <= ((oid V).eq x y)? :=
  inf_le_left.trans inf_le_left
have htA : t <= a := inf_le_left.trans inf_le_right
have htmem : t <= memB (opairB (?.D.child d) w) Ge := inf_le_right
have hsub : t <= subsetB Ge (prodB ?.D ?.D) :=
  htA.trans ((hOuter e).trans
    ((inf_le_left.trans inf_le_left).trans
      (inf_le_left.trans inf_le_left)))
have hdec :
  t <= bigcup p : ?.D.idx x ?.D.idx,
    eqB (opairB (?.D.child d) w)
      (opairB (?.D.child p.1) (?.D.child p.2)) sqcap
    memB (opairB (?.D.child p.1) (?.D.child p.2)) Ge :=
  (inf_memB_le_iSup_matrix (hsub := hsub)
    (opairB (?.D.child d) w)).trans' <|
  le_inf le_rfl htmem
refine (le_inf le_rfl hdec).trans ?_

```

```

rw [inf_iSup_eq (a := A)]
refine iSup_le fun p => ?_
let s :=
  t sqcap
  (eqB (opairB (?D.child d) w)
    (opairB (?D.child p.1) (?D.child p.2)) sqcap
    memB (opairB (?D.child p.1) (?D.child p.2)) Ge)
change s <= memB (opairB (?D.child e) w) Fd
have hsT : s <= t := inf_le_left
have hsp : s <=
  memB (opairB (?D.child p.1) (?D.child p.2)) Ge :=
  inf_le_right.trans inf_le_right
have hop : s <=
  eqB (opairB (?D.child d) w)
    (opairB (?D.child p.1) (?D.child p.2)) :=
  inf_le_right.trans inf_le_left
have hsrc : s <= eqB (?D.child d) (?D.child p.1) := by
  rw [eqB_opairB] at hop
  exact hop.trans inf_le_left
have hout : s <= eqB w (?D.child p.2) := by
  rw [eqB_opairB] at hop
  exact hop.trans inf_le_right
have hsame : s <=
  memB (opairB (?D.child d) (?D.child p.2)) Ge :=
  (memB_opairB_congr Ge (?D.child p.1) (?D.child d)
    (?D.child p.2) (?D.child p.2)).trans' <|
  le_inf (le_inf
    (hsrc.trans_eq (eqB_comm (?D.child d) (?D.child p.1)))
    (le_top.trans (eqB_self (A := A) (?D.child p.2)).ge))
  hsp
have hinner : s <=
  memB (opairB (?D.child e) (?D.child p.2)) Fd :=
  (interpDKAbsFamily_outer_le_inner ? V K hK hV ? y x P a
    hInnerRows hOuterRows d e p.2).trans' <|
  le_inf (le_inf (hsT.trans htEq) (hsT.trans htA)) hsame
exact (memB_opairB_congr Fd (?D.child e) (?D.child e)
  (?D.child p.2) w).trans' <|
le_inf (le_inf
  (le_top.trans (eqB_self (A := A) (?D.child e)).ge)
  (hout.trans_eq (eqB_comm w (?D.child p.2))))
hinner

/-- The displayed inner graph is below every `Q`-upper bound of the
family image. -/
theorem interpDKAbsFamily_image_least
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?D = top )
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?D))
  (y x : V.idx) (P : LamDK V.idx K.idx) (a : A)
  (hInner : forall d, a <= isScottContinuousB
    (interpDKBodyGraph ? V K hK hV (?update hV ?.total y d) x P)
    ?D ?D ?R ?R)
  (hOuter : forall z, a <= isScottContinuousB
    (interpDKBodyGraph ? V K hK hV (?update hV ?.total x z) y P)
    ?D ?D ?R ?R)
  (hInnerRows : forall d, forall e, IsRelElementAt ?D a
    (interpDKRelVal ? V K hK hV
      ((?.update hV ?.total y d).update hV ?.total x e) P))
  (hOuterRows : forall z, forall d, IsRelElementAt ?D a
    (interpDKRelVal ? V K hK hV
      ((?.update hV ?.total x z).update hV ?.total y d) P))
  (S : AName.{u} A) (d : ?D.idx) (G : AName.{u} A) :

```

```

((oid V).eq x y)? sqcap a sqcap
  isDirectedRelB S ?.D ?.R sqcap
  isSupRelB (?.D.child d) S ?.R sqcap
  isUpperBoundRelB G
    (graphImageB
      (interpDKAbsFamilyGraph ? V K hK hV ? y x P) S ?.C)
  ?.Q <=
relB ?.Q
  (interpDKBodyGraph ? V K hK hV (?.update hV ?.total y d) x P)
  G := by
let Fg := interpDKAbsFamilyGraph ? V K hK hV ? y x P
let Fd :=
  interpDKBodyGraph ? V K hK hV (?.update hV ?.total y d) x P
let Img := graphImageB Fg S ?.C
let t :=
  ((oid V).eq x y)? sqcap a sqcap
  isDirectedRelB S ?.D ?.R sqcap
  isSupRelB (?.D.child d) S ?.R sqcap
  isUpperBoundRelB G Img ?.Q
change t <= relB ?.Q Fd G
have htEq : t <= ((oid V).eq x y)? :=
  inf_le_left.trans (inf_le_left.trans
    (inf_le_left.trans inf_le_left))
have htA : t <= a :=
  inf_le_left.trans (inf_le_left.trans
    (inf_le_left.trans inf_le_right))
have htDir : t <= isDirectedRelB S ?.D ?.R :=
  inf_le_left.trans (inf_le_left.trans inf_le_right)
have htSup : t <= isSupRelB (?.D.child d) S ?.R :=
  inf_le_left.trans inf_le_right
have htUb : t <= isUpperBoundRelB G Img ?.Q := inf_le_right
have hImgDir : t <= isDirectedRelB Img ?.C ?.Q :=
  (interpDKAbsFamilyGraph_image_directed ? V K hK hV ? y x P a
    hInner hOuter hInnerRows hOuterRows S).trans' <|
  le_inf (le_inf htEq htA) htDir
have hFC : t <= memB Fd ?.C :=
  htA.trans (interpDKAbsFamily_mem_mapSpace ? V K hK hV ? y x P a
    hInner d)
have hGC : t <= memB G ?.C :=
  (?.isUpperBoundRelB_le_mem_mapSpace G Img).trans' <|
  le_inf (hImgDir.trans (isDirectedRelB_nonempty Img ?.C ?.Q))

```

Lean 4 source (lines 5201–5600)

```

htUb
have hfunG : t <= isFunctionB G ?.D ?.D :=
  (?.mem_mapSpace_le_function G).trans' hGC
have hsubG : t <= subsetB G (prodB ?.D ?.D) :=
  hfunG.trans (inf_le_left.trans inf_le_left)
have hfunF : t <= isFunctionB Fd ?.D ?.D :=
  (?.mem_mapSpace_le_function Fd).trans' hFC
have hsubF : t <= subsetB Fd (prodB ?.D ?.D) :=
  hfunF.trans (inf_le_left.trans inf_le_left)
have hpw : t <= pointwiseLeB Fd G ?.D ?.R := by
  unfold pointwiseLeB
  refine le_iInf fun s => le_iInf fun v => le_iInf fun v' => ?_
  rw [le_himp_iff]
  let u :=
    t sqcap (memB s ?.D sqcap memB (opairB s v) Fd sqcap memB (opairB s v') G)
  change u <= relB ?.R v v'
  have huT : u <= t := inf_le_left
  have huF : u <= memB (opairB s v) Fd :=
    inf_le_right.trans (inf_le_left.trans inf_le_right)
  have huG : u <= memB (opairB s v') G :=

```



```

inf_le_right.trans inf_le_right
have hdec :
  u <= bigcup p : ?.D.idx x ?.D.idx,
    eqB (opairB s v)
      (opairB (?.D.child p.1) (?.D.child p.2)) sqcap
      memB (opairB (?.D.child p.1) (?.D.child p.2)) Fd :=
  (inf_memB_le_iSup_matrix (hsub := huT.trans hsubF)
    (opairB s v)).trans' <|
  le_inf le_rfl huF
have hdec' :
  u <= bigcup q : ?.D.idx x ?.D.idx,
    eqB (opairB s v')
      (opairB (?.D.child q.1) (?.D.child q.2)) sqcap
      memB (opairB (?.D.child q.1) (?.D.child q.2)) G :=
  (inf_memB_le_iSup_matrix (hsub := huT.trans hsubG)
    (opairB s v')).trans' <|
  le_inf le_rfl huG
refine (le_inf (le_inf le_rfl hdec) hdec').trans ?_
rw [inf_iSup_eq (a := A)]
refine iSup_le fun q => ?_
rw [inf_right_comm, inf_iSup_eq (a := A)]
refine iSup_le fun p => ?_
let r :=
  u sqcap
    (eqB (opairB s v')
      (opairB (?.D.child q.1) (?.D.child q.2)) sqcap
      memB (opairB (?.D.child q.1) (?.D.child q.2)) G) sqcap
    (eqB (opairB s v)
      (opairB (?.D.child p.1) (?.D.child p.2)) sqcap
      memB (opairB (?.D.child p.1) (?.D.child p.2)) Fd)
change r <= relB ?.R v v'
have hrU : r <= u := inf_le_left.trans inf_le_left
have hrp : r <=
  memB (opairB (?.D.child p.1) (?.D.child p.2)) Fd :=
  inf_le_right.trans inf_le_right
have hrq : r <=
  memB (opairB (?.D.child q.1) (?.D.child q.2)) G :=
  inf_le_left.trans (inf_le_right.trans inf_le_right)
have hop : r <=
  eqB (opairB s v)
    (opairB (?.D.child p.1) (?.D.child p.2)) :=
  inf_le_right.trans inf_le_left
have hoq : r <=
  eqB (opairB s v')
    (opairB (?.D.child q.1) (?.D.child q.2)) :=
  inf_le_left.trans (inf_le_right.trans inf_le_left)
have hvp : r <= eqB v (?.D.child p.2) := by
  rw [eqB_opairB] at hop
  exact hop.trans inf_le_right
have hvq : r <= eqB v' (?.D.child q.2) := by
  rw [eqB_opairB] at hoq
  exact hoq.trans inf_le_right
have hsp : r <= eqB s (?.D.child p.1) := by
  rw [eqB_opairB] at hop
  exact hop.trans inf_le_left
have hsq : r <= eqB s (?.D.child q.1) := by
  rw [eqB_opairB] at hoq
  exact hoq.trans inf_le_left
have heq : r <= eqB (?.D.child p.1) (?.D.child q.1) :=
  (eqB_trans (?.D.child p.1) s (?.D.child q.1)).trans' <|
  le_inf (by rw [eqB_comm]; exact hsp) hsq
have hGsame : r <=
  memB (opairB (?.D.child p.1) (?.D.child q.2)) G :=

```

```

(memB_opairB_congr G (?D.child q.1) (?D.child p.1)
  (?D.child q.2) (?D.child q.2)).trans' <|
le_inf (le_inf
  (heq.trans_eq (eqB_comm (?D.child p.1) (?D.child q.1)))
  (le_top.trans (eqB_self (A := A) (?D.child q.2)).ge))
hrq
have hmts : r <=
  mapsToSupB
    (interpDKBodyGraph ? V K hK hV
      (?update hV ?.total x p.1) y P)
    S (?D.child p.2) ?.R :=
  (interpDKAbsFamily_inner_mapsToSup_outer ? V K hK hV ? y x P a
    hOuter hInnerRows hOuterRows S d p.1 p.2).trans' <|
le_inf (le_inf (le_inf (le_inf
  (hrU.trans (huT.trans htEq))
  (hrU.trans (huT.trans htA)))
  (hrU.trans (huT.trans htDir)))
  (hrU.trans (huT.trans htSup)))
hrp
have hub : r <=
  isUpperBoundRelB (?D.child q.2)
    (graphImageB
      (interpDKBodyGraph ? V K hK hV
        (?update hV ?.total x p.1) y P)
      S ?.D)
    ?.R := by
refine le_iInf fun y_0 => ?_
rw [le_himp_iff, memB_graphImageB]
refine (le_inf inf_le_left (inf_le_right.trans inf_le_right)).trans ?_
rw [inf_iSup_eq (a := A)]
refine iSup_le fun z => ?_
let sz :=
  r sqcap
    (memB z S sqcap
      memB (opairB z y_0)
        (interpDKBodyGraph ? V K hK hV
          (?update hV ?.total x p.1) y P))
change sz <= relB ?.R y_0 (?D.child q.2)
have hszR : sz <= r := inf_le_left
have hzS : sz <= memB z S := inf_le_right.trans inf_le_left
have hzY : sz <=
  memB (opairB z y_0)
    (interpDKBodyGraph ? V K hK hV
      (?update hV ?.total x p.1) y P) :=
  inf_le_right.trans inf_le_right
have hzD : sz <= memB z ?.D :=
  (memB_of_subsetB z S ?.D).trans' <|
  le_inf hzS
    ((hszR.trans (hrU.trans (huT.trans htDir))).trans
      (isDirectedRelB_subset S ?.D ?.R))
refine (le_inf le_rfl hzD).trans ?_
rw [memB_eq (x := z) (y := ?.D), inf_iSup_eq (a := A)]
refine iSup_le fun k => ?_
let sk :=
  sz sqcap (eqB z (?D.child k) sqcap ?.D.val k)
change sk <= relB ?.R y_0 (?D.child q.2)
have hskS : sk <= sz := inf_le_left
have hzk : sk <= eqB z (?D.child k) :=
  inf_le_right.trans inf_le_left
have hGe : sk <=
  memB (opairB (?D.child k) y_0)
    (interpDKBodyGraph ? V K hK hV
      (?update hV ?.total x p.1) y P) :=

```

```

(memB_opairB_congr
  (interpDKBodyGraph ? V K hK hV
    (? .update hV ? .total x p.1) y P)
  z (? .D.child k) y_0 y_0).trans' <|
le_inf (le_inf hzk
  (le_top.trans (eqB_self (A := A) y_0).ge))
  (hskS.trans hzY))
have hFk : sk <=
  memB (opairB (? .D.child p.1) y_0)
    (interpDKBodyGraph ? V K hK hV
      (? .update hV ? .total y k) x P) :=
  (interpDKAbsFamily_outer_mem_le_inner ? V K hK hV ? y x P a
    hInnerRows hOuter hOuterRows k p.1 y_0).trans' <|
  le_inf (le_inf
    (hskS.trans (hszR.trans (hrU.trans (huT.trans htEq))))
    (hskS.trans (hszR.trans (hrU.trans (huT.trans htA)))))
    hGe
have hFkC : sk <=
  memB (interpDKBodyGraph ? V K hK hV
    (? .update hV ? .total y k) x P) ? .C :=
  (hskS.trans (hszR.trans (hrU.trans (huT.trans htA)))).trans
  (interpDKAbsFamily_mem_mapSpace ? V K hK hV ? y x P a
    hInner k)
have hFkImg : sk <=
  memB (interpDKBodyGraph ? V K hK hV
    (? .update hV ? .total y k) x P) Img := by
  rw [memB_graphImageB]
  refine le_inf hFkC (le_iSup_of_le (? .D.child k) ?_)
  refine le_inf ?_ ?_
  * exact (memB_eqB_left z S (? .D.child k)).trans' <|
    le_inf (hskS.trans hzS) hzk
  * exact le_top.trans
    (memB_interpDKAbsFamilyGraph_child
      ? V K hK hV ? y x P k).ge
have hQk : sk <=
  relB ? .Q
    (interpDKBodyGraph ? V K hK hV
      (? .update hV ? .total y k) x P) G :=
  (isUpperBoundRelB_apply G Img ? .Q
    (interpDKBodyGraph ? V K hK hV
      (? .update hV ? .total y k) x P)).trans' <|
  le_inf (hskS.trans (hszR.trans (hrU.trans (huT.trans htUb))))
    hFkImg
exact (? .relQ_apply
  (interpDKBodyGraph ? V K hK hV
    (? .update hV ? .total y k) x P)
  G (? .D.child p.1) y_0 (? .D.child q.2)).trans' <|
le_inf (le_inf (le_inf hFkC
  (hskS.trans (hszR.trans (hrU.trans (huT.trans hGC)))))
  hQk)
  (le_inf (le_inf
    (le_top.trans (by
      rw [ <- oid_eps]
      exact (? .total p.1).ge))
    hFk)
    (hskS.trans (hszR.trans hGsame)))
have hfunGe : r <=
  isFunctionB
    (interpDKBodyGraph ? V K hK hV
      (? .update hV ? .total x p.1) y P)
    ? .D ? .D :=
  (hrU.trans (huT.trans htA)).trans
  ((hOuter p.1).trans (inf_le_left.trans inf_le_left))

```

```

have hisup : r <=
  isSupRelB (?D.child p.2)
    (graphImageB
      (interpDKBodyGraph ? V K hK hV
        (?update hV ?.total x p.1) y P)
      S ?.D)
  ?.R :=
  (mapsToSupB_le_isSup_graphImageB
    (interpDKBodyGraph ? V K hK hV
      (?update hV ?.total x p.1) y P)
    S ?.D ?.D ?.R (?D.child p.2) hfunGe).trans' <|
  le_inf le_rfl hmts
have hpq : r <= relB ?.R (?D.child p.2) (?D.child q.2) :=
  (isSupRelB_least (?D.child p.2)
    (graphImageB
      (interpDKBodyGraph ? V K hK hV
        (?update hV ?.total x p.1) y P)
      S ?.D)
    ?.R (?D.child q.2)).trans' <|
  le_inf hisup hub
exact (relB_congr ?.R (?D.child p.2) v (?D.child q.2) v').trans' <|
  le_inf (le_inf
    (hvp.trans_eq (eqB_comm v (?D.child p.2)))
    (hvq.trans_eq (eqB_comm v' (?D.child q.2))))
  hpq
exact (?.pointwise_le_relQ Fd G).trans' <|
  le_inf (le_inf hFC hGC) hpw

/-- A displayed inner graph is the `Q`-supremum of the family image. -/
theorem interpDKAbsFamily_image_isSupRelB
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top)
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?.D))
  (y x : V.idx) (P : LamDK V.idx K.idx) (a : A)
  (hInner : forall d, a <= isScottContinuousB
    (interpDKBodyGraph ? V K hK hV (?update hV ?.total y d) x P)
    ?.D ?.D ?.R ?.R)
  (hOuter : forall z, a <= isScottContinuousB
    (interpDKBodyGraph ? V K hK hV (?update hV ?.total x z) y P)
    ?.D ?.D ?.R ?.R)
  (hInnerRows : forall d, forall e, IsRelElementAt ?.D a
    (interpDKRelVal ? V K hK hV
      ((?.update hV ?.total y d).update hV ?.total x e) P))
  (hOuterRows : forall z, forall d, IsRelElementAt ?.D a
    (interpDKRelVal ? V K hK hV
      ((?.update hV ?.total x z).update hV ?.total y d) P))
  (S : AName.{u} A) (d : ?.D.idx) :
  ((oid V).eq x y)? sqcap a sqcap
  isDirectedRelB S ?.D ?.R sqcap
  isSupRelB (?D.child d) S ?.R <=
  isSupRelB
    (interpDKBodyGraph ? V K hK hV (?update hV ?.total y d) x P)
    (graphImageB
      (interpDKAbsFamilyGraph ? V K hK hV ? y x P) S ?.C)
  ?.Q := by
unfold isSupRelB
refine le_inf ?_ ?_
* refine le_iInf fun G => ?_
  rw [le_himp_iff]
  exact (interpDKAbsFamily_image_upper ? V K hK hV ? y x P a
    hInner hOuter hInnerRows hOuterRows S d G).trans' <|
  le_inf (le_inf (le_inf

```

```

      (inf_le_left.trans (inf_le_left.trans
        (inf_le_left.trans inf_le_left)))
      (inf_le_left.trans (inf_le_left.trans
        (inf_le_left.trans inf_le_right))))
      (inf_le_left.trans (inf_le_right.trans inf_le_left)))
    inf_le_right
* refine le_iInf fun G => ?_
  rw [le_himp_iff]
  exact interpDKAbsFamily_image_least ? V K hK hV ? y x P a
    hInner hOuter hInnerRows hOuterRows S d G

/-- Directed-supremum preservation for the abs body graph, off the
diagonal. -/
theorem interpDKBodyGraph_abs_mapsToSup
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top )
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?.D))
  (y x : V.idx) (P : LamDK V.idx K.idx) (a : A)
  (hInner : forall d, a <= isScottContinuousB
    (interpDKBodyGraph ? V K hK hV (? .update hV ?.total y d) x P)
    ?.D ?.D ?.R ?.R)
  (hOuter : forall z, a <= isScottContinuousB
    (interpDKBodyGraph ? V K hK hV (? .update hV ?.total x z) y P)
    ?.D ?.D ?.R ?.R)
  (hInnerRows : forall d, forall e, IsRelElementAt ?.D a
    (interpDKRelVal ? V K hK hV
      ((?.update hV ?.total y d).update hV ?.total x e) P))
  (hOuterRows : forall z, forall d, IsRelElementAt ?.D a
    (interpDKRelVal ? V K hK hV
      ((?.update hV ?.total x z).update hV ?.total y d) P))
  (S u v : AName.{u} A) :
  ((oid V).eq x y)? sqcap a sqcap lamDKVal V K (.abs x P) sqcap
    isDirectedRelB S ?.D ?.R sqcap isSupRelB u S ?.R sqcap
    memB (opairB u v)
    (interpDKBodyGraph ? V K hK hV ? y (.abs x P)) <=
  mapsToSupB
    (interpDKBodyGraph ? V K hK hV ? y (.abs x P))
    S v ?.R := by
let Fabs := interpDKBodyGraph ? V K hK hV ? y (.abs x P)
let Fg := interpDKAbsFamilyGraph ? V K hK hV ? y x P
let b := a sqcap lamDKVal V K (.abs x P)
have hfuns : b <= isFunctionB Fabs ?.D ?.D :=
  interpDKBodyGraph_abs_le_isFunctionB ? V K hK hV ? y x P a
  hInner hInnerRows
unfold mapsToSupB
refine le_inf ?_ ?_
* refine le_iInf fun w => le_iInf fun z => ?_
  rw [le_himp_iff]
  let t :=
    (((oid V).eq x y)? sqcap a sqcap lamDKVal V K (.abs x P) sqcap
      isDirectedRelB S ?.D ?.R sqcap isSupRelB u S ?.R sqcap
      memB (opairB u v) Fabs) sqcap
    (memB w S sqcap memB (opairB w z) Fabs)
  change t <= relB ?.R z v
  have htEq : t <= ((oid V).eq x y)? :=
    inf_le_left.trans (inf_le_left.trans (inf_le_left.trans
      (inf_le_left.trans (inf_le_left.trans inf_le_left))))
  have htA : t <= a :=
    inf_le_left.trans (inf_le_left.trans (inf_le_left.trans
      (inf_le_left.trans (inf_le_left.trans inf_le_right))))
  have htLam : t <= lamDKVal V K (.abs x P) :=
    inf_le_left.trans (inf_le_left.trans (inf_le_left.trans

```

```

      (inf_le_left.trans inf_le_right)))
have htuv : t <= memB (opairB u v) Fabs :=
  inf_le_left.trans inf_le_right
have htWS : t <= memB w S := inf_le_right.trans inf_le_left
have htWz : t <= memB (opairB w z) Fabs :=
  inf_le_right.trans inf_le_right
have htU : t <= isSupRelB u S ?.R :=
  inf_le_left.trans (inf_le_left.trans inf_le_right)
have hWu : t <= relB ?.R w u :=
  (isUpperBoundRelB_apply u S ?.R w).trans' <|
    le_inf (htu.trans inf_le_left) htWS
exact (interpDKBodyGraph_abs_apply_mono ? V K hK hV ? y x P a
  hInner hOuter hInnerRows hOuterRows w u z v).trans' <|
  le_inf (le_inf (le_inf (le_inf (le_inf
    htEq htA) htLam) htWz) htuv) hWu
* refine le_iInf fun c => ?_
rw [le_himp_iff]
let upper :=
  ? w : AName A, ? z : AName A,
  memB w S sqcap memB (opairB w z) Fabs ? relB ?.R z c
let t :=
  (((oid V).eq x y)? sqcap a sqcap lamDKVal V K (.abs x P) sqcap
    isDirectedRelB S ?.D ?.R sqcap isSupRelB u S ?.R sqcap
    memB (opairB u v) Fabs) sqcap upper
change t <= relB ?.R v c
have htEq : t <= ((oid V).eq x y)? :=
  inf_le_left.trans (inf_le_left.trans (inf_le_left.trans
    (inf_le_left.trans (inf_le_left.trans inf_le_left))))
have htA : t <= a :=
  inf_le_left.trans (inf_le_left.trans (inf_le_left.trans
    (inf_le_left.trans (inf_le_left.trans inf_le_right))))
have htLam : t <= lamDKVal V K (.abs x P) :=
  inf_le_left.trans (inf_le_left.trans (inf_le_left.trans
    (inf_le_left.trans inf_le_right)))
have htB : t <= b := le_inf htA htLam
have htDir : t <= isDirectedRelB S ?.D ?.R :=
  inf_le_left.trans (inf_le_left.trans
    (inf_le_left.trans inf_le_right))
have htSup : t <= isSupRelB u S ?.R :=
  inf_le_left.trans (inf_le_left.trans inf_le_right)
have htuv : t <= memB (opairB u v) Fabs :=
  inf_le_left.trans inf_le_right
have htUpper : t <= upper := inf_le_right
have hdec :
  t <= bigcup p : ?.D.idx x ?.D.idx,
  eqB (opairB u v)
  (opairB (?.D.child p.1) (?.D.child p.2)) sqcap
  memB (opairB (?.D.child p.1) (?.D.child p.2)) Fabs :=
  (inf_memB_le_iSup_matrix (hsub := (htB.trans hfun).trans
    (inf_le_left.trans inf_le_left)) (opairB u v)).trans' <|
    le_inf le_rfl htuv
refine (le_inf le_rfl hdec).trans ?_
rw [inf_iSup_eq (a := A)]
refine iSup_le fun p => ?_
let s :=
  t sqcap
  (eqB (opairB u v)
    (opairB (?.D.child p.1) (?.D.child p.2)) sqcap
    memB (opairB (?.D.child p.1) (?.D.child p.2)) Fabs)
change s <= relB ?.R v c
have hsT : s <= t := inf_le_left
have hsp : s <=
  memB (opairB (?.D.child p.1) (?.D.child p.2)) Fabs :=

```

```

inf_le_right.trans inf_le_right
have hop : s <=

```

Lean 4 source (lines 5601–5914)

```

eqB (opairB u v)
  (opairB (?.D.child p.1) (?.D.child p.2)) :=
inf_le_right.trans inf_le_left
have hup : s <= eqB u (?.D.child p.1) := by
  rw [eqB_opairB] at hop
  exact hop.trans inf_le_left
have hvp : s <= eqB v (?.D.child p.2) := by
  rw [eqB_opairB] at hop
  exact hop.trans inf_le_right
have hsupP : s <= isSupRelB (?.D.child p.1) S ?.R :=
  (isSupRelB_congr u (?.D.child p.1) S ?.R).trans' <|
    le_inf hup (hsT.trans htSup)
have hFdSup : s <=
  isSupRelB
    (interpDKBodyGraph ? V K hK hV
      (??.update hV ?.total y p.1) x P)
    (graphImageB Fg S ?.C) ?.Q :=
  (interpDKAbsFamily_image_isSupRelB ? V K hK hV ? y x P a
    hInner hOuter hInnerRows hOuterRows S p.1).trans' <|
    le_inf (le_inf (le_inf (hsT.trans htEq) (hsT.trans htA))
      (hsT.trans htDir)) hsupP
have hImgDir : s <=
  isDirectedRelB (graphImageB Fg S ?.C) ?.C ?.Q :=
  (interpDKAbsFamilyGraph_image_directed ? V K hK hV ? y x P a
    hInner hOuter hInnerRows hOuterRows S).trans' <|
    le_inf (le_inf (hsT.trans htEq) (hsT.trans htA))
      (hsT.trans htDir)
have hmemLam : s <=
  memB (opairB
    (interpDKBodyGraph ? V K hK hV
      (??.update hV ?.total y p.1) x P)
    (?.D.child p.2)) ?.Lam :=
  (interpDKBodyGraph_abs_mem_eq_lam ? V K hK hV ? y x P a
    hInner hInnerRows p.1 p.2).le.trans' (le_inf (hsT.trans htB) hsp)
  |>.trans inf_le_right
have hLam : ( top : A) <=
  isScottContinuousB ?.Lam ?.C ?.D ?.Q ?.R :=
  le_top.trans ?.lam_continuous.ge
have hLamImg : s <=
  isDirectedRelB
    (graphImageB ?.Lam (graphImageB Fg S ?.C) ?.D)
    ?.D ?.R sqcap
  isSupRelB (?.D.child p.2)
    (graphImageB ?.Lam (graphImageB Fg S ?.C) ?.D)
    ?.R :=
  (scottContinuous_image_sup (hF := hLam)
    ?.Lam (graphImageB Fg S ?.C) ?.C ?.D ?.Q ?.R
    (interpDKBodyGraph ? V K hK hV
      (??.update hV ?.total y p.1) x P)
    (?.D.child p.2)).trans' <|
    le_inf (le_inf (le_inf (le_top.trans le_top) hImgDir)
      hFdSup) hmemLam
have hcub : s <=
  isUpperBoundRelB c
    (graphImageB ?.Lam (graphImageB Fg S ?.C) ?.D)
    ?.R := by
  refine le_iInf fun z => ?_
  rw [le_himp_iff, memB_graphImageB]
  refine (le_inf le_rfl (inf_le_right.trans inf_le_right)).trans ?_

```

```

rw [inf_iSup_eq (a := A)]
refine iSup_le fun G => ?_
refine (le_inf (inf_le_left.trans inf_le_left) inf_le_right).trans ?_
let sz :=
  s sqcap (memB G (graphImageB Fg S ?.C) sqcap memB (opairB G z) ?.Lam)
change sz <= relB ?.R z c
have hszS : sz <= s := inf_le_left
have hGimg : sz <= memB G (graphImageB Fg S ?.C) :=
  inf_le_right.trans inf_le_left
have hGz : sz <= memB (opairB G z) ?.Lam :=
  inf_le_right.trans inf_le_right
rw [memB_graphImageB] at hGimg
have hdecG : sz <= bigcup w : AName A,
  memB w S sqcap memB (opairB w G) Fg :=
  hGimg.trans inf_le_right
refine (le_inf le_rfl hdecG).trans ?_
rw [inf_iSup_eq (a := A)]
refine iSup_le fun w => ?_
let sw :=
  sz sqcap (memB w S sqcap memB (opairB w G) Fg)
change sw <= relB ?.R z c
have hswS : sw <= s := inf_le_left.trans hszS
have hwS : sw <= memB w S := inf_le_right.trans inf_le_left
have hwG : sw <= memB (opairB w G) Fg :=
  inf_le_right.trans inf_le_right
have hdecW :
  sw <= bigcup k : ?.D.idx,
    eqB w (?.D.child k) sqcap
    eqB G
    (interpDKBodyGraph ? V K hK hV
      (?.update hV ?.total y k) x P) :=
  hwG.trans_eq
  (memB_interpDKAbsFamilyGraph ? V K hK hV ? y x P w G)
refine (le_inf le_rfl hdecW).trans ?_
rw [inf_iSup_eq (a := A)]
refine iSup_le fun k => ?_
let sk :=
  sw sqcap
  (eqB w (?.D.child k) sqcap
    eqB G
    (interpDKBodyGraph ? V K hK hV
      (?.update hV ?.total y k) x P))
change sk <= relB ?.R z c
have hskW : sk <= sw := inf_le_left
have hwk : sk <= eqB w (?.D.child k) :=
  inf_le_right.trans inf_le_left
have hGk : sk <=
  eqB G
  (interpDKBodyGraph ? V K hK hV
    (?.update hV ?.total y k) x P) :=
  inf_le_right.trans inf_le_right
have hLamk : sk <=
  memB (opairB
    (interpDKBodyGraph ? V K hK hV
      (?.update hV ?.total y k) x P)
    z) ?.Lam :=
  (memB_opairB_congr ?.Lam G
    (interpDKBodyGraph ? V K hK hV
      (?.update hV ?.total y k) x P)
    z z).trans' <|
le_inf (le_inf hGk
  (le_top.trans (eqB_self (A := A) z).ge))
  (hskW.trans (inf_le_left.trans hGz))

```



```

have hsubLam : subsetB ?Lam (prodB ?C ?D) = top :=
  isFunctionB_subset ?lam_function
have hdecZ :
  sk <= bigcup p : ?C.idx x ?D.idx,
    eqB (opairB
      (interpDKBodyGraph ? V K hK hV
        (?update hV ?total y k) x P)
      z)
      (opairB (?C.child p.1) (?D.child p.2)) sqcap
    memB (opairB (?C.child p.1) (?D.child p.2)) ?Lam :=
  (inf_memB_le_iSup_matrix
    (hsub := le_top.trans hsubLam.ge)
    (opairB
      (interpDKBodyGraph ? V K hK hV
        (?update hV ?total y k) x P)
      z)).trans' <|
    le_inf le_rfl hLamk
refine (le_inf le_rfl hdecZ).trans ?_
rw [inf_iSup_eq (a := A)]
refine iSup_le fun p => ?_
let sn :=
  sk sqcap
  (eqB (opairB
    (interpDKBodyGraph ? V K hK hV
      (?update hV ?total y k) x P)
    z)
    (opairB (?C.child p.1) (?D.child p.2)) sqcap
  memB (opairB (?C.child p.1) (?D.child p.2)) ?Lam)
change sn <= relB ?R z c
have hsnK : sn <= sk := inf_le_left
have hop : sn <=
  eqB (opairB
    (interpDKBodyGraph ? V K hK hV
      (?update hV ?total y k) x P)
    z)
    (opairB (?C.child p.1) (?D.child p.2)) :=
  inf_le_right.trans inf_le_left
have hzn : sn <= eqB z (?D.child p.2) := by
  rw [eqB_opairB] at hop
  exact hop.trans inf_le_right
have hLamn : sn <=
  memB (opairB
    (interpDKBodyGraph ? V K hK hV
      (?update hV ?total y k) x P)
    (?D.child p.2)) ?Lam :=
  (memB_opairB_congr ?Lam (?C.child p.1)
    (interpDKBodyGraph ? V K hK hV
      (?update hV ?total y k) x P)
    (?D.child p.2) (?D.child p.2)).trans' <|
  le_inf (le_inf
    (by
      rw [eqB_opairB] at hop
      exact hop.trans inf_le_left |>.trans_eq
        (eqB_comm
          (interpDKBodyGraph ? V K hK hV
            (?update hV ?total y k) x P)
            (?C.child p.1)))
      (le_top.trans (eqB_self (A := A) (?D.child p.2)).ge))
    (inf_le_right.trans inf_le_right)
  have hFabsn : sn <=
    memB (opairB (?D.child k) (?D.child p.2)) Fabs := by
    have hmeet : sn <=
      a sqcap lamDKVal V K (.abs x P) sqcap

```

```

      memB (opairB
        (interpDKBodyGraph ? V K hK hV
          (?.update hV ?.total y k) x P)
          (?.D.child p.2)) ?.Lam :=
      le_inf (hsnK.trans (hskW.trans (hswS.trans (hsT.trans htB)))) hLam
    exact ((interpDKBodyGraph_abs_mem_eq_lam ? V K hK hV ? y x P a
      hInner hInnerRows k p.2).symm.le.trans' hmeet).trans
      inf_le_right
  have hFabsz : sn <= memB (opairB (?.D.child k) z) Fabs :=
    (memB_opairB_congr Fabs (?.D.child k) (?.D.child k)
      (?.D.child p.2) z).trans' <|
    le_inf (le_inf
      (le_top.trans (eqB_self (A := A) (?.D.child k)).ge)
      (hzn.trans_eq (eqB_comm z (?.D.child p.2))))
      hFabsn
  have hkS : sn <= memB (?.D.child k) S :=
    (memB_eqB_left w S (?.D.child k)).trans' <|
    le_inf (hsnK.trans (hskW.trans hws))
      (hsnK.trans hwk)
  have hupper : sn <=
    (memB (?.D.child k) S sqcap
      memB (opairB (?.D.child k) z) Fabs ?
        relB ?.R z c) :=
    (iInf_le (fun z' : AName A =>
      memB (?.D.child k) S sqcap
        memB (opairB (?.D.child k) z') Fabs ?
          relB ?.R z' c) z).trans' <|
    (iInf_le (fun w' : AName A =>
      ? z' : AName A,
        memB w' S sqcap memB (opairB w' z') Fabs ?
          relB ?.R z' c) (?.D.child k)).trans'
      (hsnK.trans (hskW.trans (hswS.trans (hsT.trans htUpper))))
    exact (le_himp_iff.mp hupper).trans' <|
    le_inf le_rfl (le_inf hkS hFabsz)
  have hpc : s <= relB ?.R (?.D.child p.2) c :=
    (isSupRelB_least (?.D.child p.2)
      (graphImageB ?.Lam (graphImageB Fg S ?.C) ?.D)
      ?.R c).trans' <|
    le_inf (hLamImg.trans inf_le_right) hcub
  exact (relB_congr ?.R (?.D.child p.2) v c c).trans' <|
    le_inf (le_inf
      (hvp.trans_eq (eqB_comm v (?.D.child p.2)))
      (le_top.trans (eqB_self (A := A) c).ge))
    hpc

```

```

/-- Off-diagonal Scott continuity of the abs body graph. -/
theorem interpDKBodyGraph_abs_le_scottContinuous_ne
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top )
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?.D))
  (y x : V.idx) (P : LamDK V.idx K.idx) (a : A)
  (hInner : forall d, a <= isScottContinuousB
    (interpDKBodyGraph ? V K hK hV (?.update hV ?.total y d) x P)
    ?.D ?.D ?.R ?.R)
  (hInnerRows : forall d, forall e, IsRelElementAt ?.D a
    (interpDKRelVal ? V K hK hV
      ((?.update hV ?.total y d).update hV ?.total x e) P))
  (hOuter : forall z, a <= isScottContinuousB
    (interpDKBodyGraph ? V K hK hV (?.update hV ?.total x z) y P)
    ?.D ?.D ?.R ?.R)
  (hOuterRows : forall z, forall d, IsRelElementAt ?.D a
    (interpDKRelVal ? V K hK hV

```

```

      ((?.update hV ?.total x z).update hV ?.total y d) P)) :
    ((oid V).eq x y)? sqcap a sqcap lamDKVal V K (.abs x P) <=
      isScottContinuousB
      (interpDKBodyGraph ? V K hK hV ? y (.abs x P))
      ?.D ?.D ?.R ?.R := by
  unfold isScottContinuousB
  refine le_inf (le_inf ?_ ?_) ?_
  * exact (le_inf (inf_le_left.trans inf_le_right) inf_le_right).trans
    (interpDKBodyGraph_abs_le_isFunctionB ? V K hK hV ? y x P a
      hInner hInnerRows)
  * refine le_iInf fun u => le_iInf fun u' =>
    le_iInf fun v => le_iInf fun v' => ?_
  rw [le_himp_iff]
  exact (interpDKBodyGraph_abs_apply_mono ? V K hK hV ? y x P a
    hInner hOuter hInnerRows hOuterRows u u' v v').trans' <|
  le_inf (le_inf (le_inf inf_le_left
    (inf_le_right.trans (inf_le_left.trans inf_le_left)))
    (inf_le_right.trans (inf_le_left.trans inf_le_right)))
    (inf_le_right.trans inf_le_right)
  * refine le_iInf fun S => le_iInf fun u => le_iInf fun v => ?_
  rw [le_himp_iff]
  exact (interpDKBodyGraph_abs_mapsToSup ? V K hK hV ? y x P a
    hInner hOuter hInnerRows hOuterRows S u v).trans' <|
  le_inf (le_inf (le_inf inf_le_left
    (inf_le_right.trans (inf_le_left.trans inf_le_left)))
    (inf_le_right.trans (inf_le_left.trans inf_le_right)))
    (inf_le_right.trans inf_le_right)

/-- Degree-local Scott continuity of an abstraction body graph. -/
theorem interpDKBodyGraph_abs_le_scottContinuous
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top)
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?.D))
  (y x : V.idx) (P : LamDK V.idx K.idx) (a : A)
  (hInner : forall d, a <= isScottContinuousB
    (interpDKBodyGraph ? V K hK hV (?.update hV ?.total y d) x P)
    ?.D ?.D ?.R ?.R)
  (hInnerRows : forall d, forall e, IsRelElementAt ?.D a
    (interpDKRelVal ? V K hK hV
      ((?.update hV ?.total y d).update hV ?.total x e) P))
  (hOuter : forall z, a <= isScottContinuousB
    (interpDKBodyGraph ? V K hK hV (?.update hV ?.total x z) y P)
    ?.D ?.D ?.R ?.R)
  (hOuterRows : forall z, forall d, IsRelElementAt ?.D a
    (interpDKRelVal ? V K hK hV
      ((?.update hV ?.total x z).update hV ?.total y d) P)) :
  a sqcap memB (V.child x) V sqcap lamDKVal V K P <=
    isScottContinuousB
    (interpDKBodyGraph ? V K hK hV ? y (.abs x P))
    ?.D ?.D ?.R ?.R := by
  have hdeg : a sqcap memB (V.child x) V sqcap lamDKVal V K P =
    a sqcap lamDKVal V K (.abs x P) :=
    inf_assoc a (memB (V.child x) V) (lamDKVal V K P)
  rw [hdeg]
  refine le_of_compl_cover (p := (oid V).eq x y) ?_ ?_
  * exact (interpDKBodyGraph_abs_le_scottContinuous_eq ? V K hK hV ? y x P a
    hInner hInnerRows).trans' <|
  le_inf (le_inf inf_le_right (inf_le_left.trans inf_le_left))
    (inf_le_left.trans inf_le_right)
  * exact (interpDKBodyGraph_abs_le_scottContinuous_ne ? V K hK hV ? y x P a
    hInner hInnerRows hOuter hOuterRows).trans' <|
  le_inf (le_inf inf_le_right (inf_le_left.trans inf_le_left))

```

```

      (inf_le_left.trans inf_le_right)

end Scott2026

```

A.30 Scott2026/InternalEvalPack.lean

2143 lines.

Lean 4 source (lines 1–400)

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/

import Scott2026.InternalEvalComplete

/-!
# Term induction and the Theorem 26 evaluator name

This module closes Definition 25 by induction on `LamDK`, assembles the
internal evaluator graph, and proves it is an internal function
`lamDKB D V K -> D`.
-/

universe u

namespace Scott2026

open AName

variable {A : Type u} [CompleteBooleanAlgebra A]

/-!
## Generalized-element restriction
-/

namespace IsRelElementAt

/-- Restrict a generalized element to a smaller extent by cutting its
coefficients. Shrinking the degree on the original row is not automatic:
`r d <= a sqcap eps` becomes stronger. -/
theorem inf {D : AName.{u} A} {a b : A} {r : D.idx -> A}
  (h : IsRelElementAt D a r) :
  IsRelElementAt D (a sqcap b) (fun d => r d sqcap b) := by
  refine <?respects, ?le_eps, ?single, ?total>
  * intro d e
    refine le_inf ?_ (inf_le_right.trans inf_le_right)
    have h1 : (oid D).eq d e sqcap (r d sqcap b) <= (oid D).eq d e sqcap r d :=
      le_inf inf_le_left (inf_le_right.trans inf_le_left)
    exact (h.1 d e).trans' h1
  * intro d
    have hr := h.2.1 d
    refine le_inf (le_inf ?_ inf_le_right) ?_
    * exact (hr.trans inf_le_left).trans' inf_le_left
    * exact (hr.trans inf_le_right).trans' inf_le_left
  * intro d e
    exact h.2.2.1 d e |>.trans' <|
      le_inf (inf_le_left.trans inf_le_left) (inf_le_right.trans inf_le_left)
  * have htot : a <= bigcup d, r d := h.2.2.2
    have : a sqcap b <= (bigcup d, r d) sqcap b := inf_le_inf htot le_rfl
    rwa [iSup_inf_eq] at this

```

```

/-- Same-row restriction when the coefficients are already supported by the
smaller degree. -/
theorem of_le {D : AName.{u} A} {a b : A} {r : D.idx -> A}
  (h : IsRelElementAt D a r) (hle : b <= a)
  (hsupp : forall d, r d <= b) :
  IsRelElementAt D b r :=
  <h.1, fun d => le_inf (hsupp d) ((h.2.1 d).trans inf_le_right),
  h.2.2.1, hle.trans h.2.2.2>

theorem congr_degree {D : AName.{u} A} {a b : A} {r : D.idx -> A}
  (h : IsRelElementAt D a r) (e : a = b) :
  IsRelElementAt D b r :=
  e |> h

end IsRelElementAt

/-- Extent factors drop out of `Oid` equality. -/
theorem oid_eq_le_eqB_child (X : AName.{u} A) (i j : X.idx) :
  (oid X).eq i j <= eqB (X.child i) (X.child j) := by
  simp only [oid_eq]
  exact inf_le_right

/-- `AName.idx` is not unfolded by rewrite, so we reify the `lamDKB` carrier. -/
noncomputable def asLamDK (D V K : AName.{u} A)
  (M : (lamDKB D V K).idx) : LamDK V.idx K.idx :=
  cast (by rw [lamDKB, idx_mk]) M

theorem asLamDK_encode (D V K : AName.{u} A)
  (M : (lamDKB D V K).idx) :
  encodeLamDKB V K (asLamDK D V K M) = (lamDKB D V K).child M := by
  unfold asLamDK lamDKB
  rfl

theorem asLamDK_val (D V K : AName.{u} A)
  (M : (lamDKB D V K).idx) :
  lamDKVal V K (asLamDK D V K M) = (lamDKB D V K).val M := by
  unfold asLamDK lamDKB
  rfl

noncomputable def asLam (V : AName.{u} A) (M : (lamB V).idx) : Lam V.idx :=
  cast (by rw [lamB, idx_mk]) M

theorem asLam_encode (V : AName.{u} A) (M : (lamB V).idx) :
  encodeLamB V (asLam V M) = (lamB V).child M := by
  unfold asLam lamB
  rfl

/-!
## Environment update in the source key
-/

/-- The family `x |-> ?[x := d]` is pointwise over the source setoid. -/
theorem RelFun.isPointwiseFamily_update_key
  {X Y : Type*} {S : ASetoid (A := A) X} {T : ASetoid (A := A) Y}
  (f : RelFun S T) (hS : S.IsTotal) (hT : T.IsTotal) (d : Y) :
  RelFun.IsPointwiseFamily S (fun x => f.update hS hT x d) := by
  intro x y i j
  rw [RelFun.update_val, RelFun.update_val, inf_sup_left]
  refine sup_le ?_ ?_
  * apply le_sup_of_le_left
  refine le_inf ?_ (inf_le_right.trans inf_le_right)
  exact (S.trans i x y).trans' <|

```

```

    le_inf (inf_le_right.trans inf_le_left) inf_le_left
* apply le_sup_of_le_right
refine le_inf ?_ (inf_le_right.trans inf_le_right)
have hgoal : S.eq x y sqcap (S.eq x i)? <= (S.eq y i)? :=
  setoidEq_inf_compl_le_compl x y i
rw [S.symm i y, S.symm i x]
exact hgoal.trans' (le_inf inf_le_left (inf_le_right.trans inf_le_left))

/-- Interpretation transports along source-key equality of an update. -/
theorem interpDKRelVal_update_key
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top )
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?.D))
  (x y : V.idx) (d : ?.D.idx) (P : LamDK V.idx K.idx)
  (e : ?.D.idx) :
  (oid V).eq x y sqcap
    interpDKRelVal ? V K hK hV (? .update hV ?.total x d) P e <=
    interpDKRelVal ? V K hK hV (? .update hV ?.total y d) P e :=
  interpDKRelVal_isPointwiseFamily ? V K hK hV (oid V)
  (fun z => ?.update hV ?.total z d)
  (RelFun.isPointwiseFamily_update_key ? hV ?.total d) P x y e

/-!
## Tag calculus for `encodeLamDKB`
-/

theorem ofNat_spec_sum.{v} (N : Nat) :
  forall n m, n + m = N ->
    (PSet.ofNat.{v} n in PSet.ofNat.{v} m <-> n < m) /\
    (PSet.Equiv (PSet.ofNat.{v} n) (PSet.ofNat.{v} m) <-> n = m) := by
  induction N using Nat.strongRecOn with
  | ind N ih =>
    have hmem : forall n m, n + m = N ->
      (PSet.ofNat.{v} n in PSet.ofNat.{v} m <-> n < m) := by
      intro n m hN
      cases m with
      | zero =>
        constructor
        * intro h
          simp [PSet.ofNat] at h
        * intro h
          exact (Nat.not_lt_zero n h).elim
      | succ m =>
        change PSet.ofNat.{v} n in insert (PSet.ofNat.{v} m) (PSet.ofNat.{v} m) <->
          n < m + 1
        rw [PSet.mem_insert_iff]
        have hspec := ih (n + m) (by omega) n m rfl
        constructor
        * intro h
          rcases h with hE | hM
          * exact (hspec.2.mp hE) |> Nat.lt_succ_self m
          * exact Nat.lt_succ_of_lt (hspec.1.mp hM)
        * intro h
          rcases (le_iff_lt_or_eq.mp (Nat.lt_succ_iff.mp h)) with hlt | heq
          * exact Or.inr (hspec.1.mpr hlt)
          * exact Or.inl (hspec.2.mpr heq)
    have hequiv : forall n m, n + m = N ->
      (PSet.Equiv (PSet.ofNat.{v} n) (PSet.ofNat.{v} m) <-> n = m) := by
      intro n m hN
      constructor
      * intro hEqv
        by_contra hne

```

```

rcases Nat.lt_or_gt_of_ne hne with hlt | hgt
* have hin : PSet.ofNat.{v} n in PSet.ofNat.{v} m :=
  (hmem n m hN).mpr hlt
  exact PSet.mem_irrefl _
  ((@PSet.Mem.congr_right (PSet.ofNat.{v} n) (PSet.ofNat.{v} m) hEqv
    (PSet.ofNat.{v} n)).mpr hin)
* have hin : PSet.ofNat.{v} m in PSet.ofNat.{v} n :=
  (hmem m n (by omega)).mpr hgt
  exact PSet.mem_irrefl _
  ((@PSet.Mem.congr_right (PSet.ofNat.{v} m) (PSet.ofNat.{v} n) hEqv.symm
    (PSet.ofNat.{v} m)).mpr hin)
* rintro rfl
  exact PSet.Equiv.rfl (x := PSet.ofNat.{v} n)
exact fun n m hN => <hmem n m hN, hequiv n m hN>

theorem ofNat_equiv_iff {n m : Nat} :
  PSet.Equiv (PSet.ofNat.{u} n) (PSet.ofNat.{u} m) <-> n = m :=
  (ofNat_spec_sum.{u} (n + m) n m rfl).2

theorem eqB_check_ofNat_bot [Nontrivial A] {n m : Nat} (hne : n != m) :
  eqB (A := A) (check (PSet.ofNat n)) (check (PSet.ofNat m)) = False :=
  (check_atomic (A := A) (PSet.ofNat n) (PSet.ofNat m)).2.1.mpr
  (mt ofNat_equiv_iff.mp hne)

theorem eqB_lamTag_mismatch_le {n m : Nat} (hne : n != m)
  (x y : AName.{u} A) {a b : A} :
  eqB (opairB (check (PSet.ofNat n)) x)
    (opairB (check (PSet.ofNat m)) y) sqcap a <= b := by
  rcases subsingleton_or_nontrivial A with hA | hA
* exact (Subsingleton.elim (a := A) _ _).le
* have : Nontrivial A := hA
  rw [eqB_opairB, eqB_check_ofNat_bot (A := A) hne, bot_inf_eq, bot_inf_eq]
  exact bot_le

@[simp] theorem eqB_encodeLamDKB_var_var (V K : AName.{u} A)
  (x y : V.idx) :
  eqB (encodeLamDKB V K (.var x)) (encodeLamDKB V K (.var y)) =
  eqB (V.child x) (V.child y) :=
  eqB_lamVarB (V.child x) (V.child y)

@[simp] theorem eqB_encodeLamDKB_const_const (V K : AName.{u} A)
  (i j : K.idx) :
  eqB (encodeLamDKB V K (.const i)) (encodeLamDKB V K (.const j)) =
  eqB (K.child i) (K.child j) :=
  eqB_lamConstB (K.child i) (K.child j)

@[simp] theorem eqB_encodeLamDKB_abs_abs (V K : AName.{u} A)
  (x y : V.idx) (P Q : LamDK V.idx K.idx) :
  eqB (encodeLamDKB V K (.abs x P)) (encodeLamDKB V K (.abs y Q)) =
  eqB (V.child x) (V.child y) sqcap
  eqB (encodeLamDKB V K P) (encodeLamDKB V K Q) :=
  eqB_lamAbsB (V.child x) (encodeLamDKB V K P)
  (V.child y) (encodeLamDKB V K Q)

@[simp] theorem eqB_encodeLamDKB_app_app (V K : AName.{u} A)
  (P Q P' Q' : LamDK V.idx K.idx) :
  eqB (encodeLamDKB V K (.app P Q)) (encodeLamDKB V K (.app P' Q')) =
  eqB (encodeLamDKB V K P) (encodeLamDKB V K P') sqcap
  eqB (encodeLamDKB V K Q) (encodeLamDKB V K Q') :=
  eqB_lamAppB (encodeLamDKB V K P) (encodeLamDKB V K Q)
  (encodeLamDKB V K P') (encodeLamDKB V K Q')

```

/-!

```

## Encoding congruence of extents and interpretations
-/

def LamDK.weight {Var Const : Type u} : LamDK Var Const -> Nat
| .var _ => 1
| .const _ => 1
| .abs _ M => M.weight + 1
| .app M N => M.weight + N.weight + 1

theorem eqB_inf_memB_le (x y S : AName.{u} A) :
  eqB x y sqcap memB x S <= memB y S :=
  (memB_eqB_left x S y).trans' (le_inf inf_le_right inf_le_left)

theorem lamDKVal_encode_congr (V K : AName.{u} A)
  (M N : LamDK V.idx K.idx) :
  eqB (encodeLamDKB V K M) (encodeLamDKB V K N) sqcap lamDKVal V K M <=
  lamDKVal V K N := by
  have : forall n M N, M.weight + N.weight = n ->
    eqB (encodeLamDKB V K M) (encodeLamDKB V K N) sqcap
    lamDKVal V K M <= lamDKVal V K N := by
    intro n
    induction n using Nat.strongRecOn with
    | ind n ih =>
      intro M N hsum
      cases M with
      | var x =>
        cases N with
        | var y =>
          rw [eqB_encodeLamDKB_var_var, lamDKVal, lamDKVal]
          exact eqB_inf_memB_le (V.child x) (V.child y) V
        | const j =>
          exact eqB_lamTag_mismatch_le (by decide : (0 : Nat) != 3)
            (V.child x) (K.child j)
        | abs y Q =>
          exact eqB_lamTag_mismatch_le (by decide : (0 : Nat) != 1)
            (V.child x) (opairB (V.child y) (encodeLamDKB V K Q))
        | app P' Q' =>
          exact eqB_lamTag_mismatch_le (by decide : (0 : Nat) != 2)
            (V.child x) (opairB (encodeLamDKB V K P') (encodeLamDKB V K Q'))
      | const i =>
        cases N with
        | var y =>
          exact eqB_lamTag_mismatch_le (by decide : (3 : Nat) != 0)
            (K.child i) (V.child y)
        | const j =>
          rw [eqB_encodeLamDKB_const_const, lamDKVal, lamDKVal]
          exact eqB_inf_memB_le (K.child i) (K.child j) K
        | abs y Q =>
          exact eqB_lamTag_mismatch_le (by decide : (3 : Nat) != 1)
            (K.child i) (opairB (V.child y) (encodeLamDKB V K Q))
        | app P' Q' =>
          exact eqB_lamTag_mismatch_le (by decide : (3 : Nat) != 2)
            (K.child i) (opairB (encodeLamDKB V K P') (encodeLamDKB V K Q'))
      | abs x P =>
        cases N with
        | var y =>
          exact eqB_lamTag_mismatch_le (by decide : (1 : Nat) != 0)
            (opairB (V.child x) (encodeLamDKB V K P)) (V.child y)
        | const j =>
          exact eqB_lamTag_mismatch_le (by decide : (1 : Nat) != 3)
            (opairB (V.child x) (encodeLamDKB V K P)) (K.child j)
        | abs y Q =>
          rw [eqB_encodeLamDKB_abs_abs, lamDKVal, lamDKVal]

```



```

    refine le_inf ?_ ?_
    * exact (eqB_inf_memB_le (V.child x) (V.child y) V).trans' <|
      le_inf (inf_le_left.trans inf_le_left)
        (inf_le_right.trans inf_le_left)
    * have hlt : P.weight + Q.weight < n := by
      rw [ <- hsum]
      simp [LamDK.weight]
      omega
    exact (ih (P.weight + Q.weight) hlt P Q rfl).trans' <|
      le_inf (inf_le_left.trans inf_le_right)
        (inf_le_right.trans inf_le_right)
  | app P' Q' =>
    exact eqB_lamTag_mismatch_le (by decide : (1 : Nat) != 2)
      (opairB (V.child x) (encodeLamDKB V K P))
      (opairB (encodeLamDKB V K P') (encodeLamDKB V K Q'))
  | app P Q =>
    cases N with
    | var y =>
      exact eqB_lamTag_mismatch_le (by decide : (2 : Nat) != 0)
        (opairB (encodeLamDKB V K P) (encodeLamDKB V K Q)) (V.child y)
    | const j =>
      exact eqB_lamTag_mismatch_le (by decide : (2 : Nat) != 3)
        (opairB (encodeLamDKB V K P) (encodeLamDKB V K Q)) (K.child j)
    | abs y Q' =>
      exact eqB_lamTag_mismatch_le (by decide : (2 : Nat) != 1)
        (opairB (encodeLamDKB V K P) (encodeLamDKB V K Q))
        (opairB (V.child y) (encodeLamDKB V K Q'))
  | app P' Q' =>
    rw [eqB_encodeLamDKB_app_app, lamDKVal, lamDKVal]
    refine le_inf ?_ ?_
    * have hlt : P.weight + P'.weight < n := by
      rw [ <- hsum]
      simp [LamDK.weight]
      omega
    exact (ih (P.weight + P'.weight) hlt P P' rfl).trans' <|
      le_inf (inf_le_left.trans inf_le_left)
        (inf_le_right.trans inf_le_left)
    * have hlt : Q.weight + Q'.weight < n := by
      rw [ <- hsum]
      simp [LamDK.weight]
      omega
    exact (ih (Q.weight + Q'.weight) hlt Q Q' rfl).trans' <|
      le_inf (inf_le_left.trans inf_le_right)
        (inf_le_right.trans inf_le_right)
  exact this _ M N rfl

theorem interpDKRelVal_encode_congr
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top )
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?.D))
  (M N : LamDK V.idx K.idx) (d : ?.D.idx) :
  eqB (encodeLamDKB V K M) (encodeLamDKB V K N) sqcap
    interpDKRelVal ? V K hK hV ? M d <=
  interpDKRelVal ? V K hK hV ? N d := by
  have : forall n M N (? : RelFun (oid V) (oid ?.D)) (d : ?.D.idx),
    M.weight + N.weight = n ->
    eqB (encodeLamDKB V K M) (encodeLamDKB V K N) sqcap
      interpDKRelVal ? V K hK hV ? M d <=
      interpDKRelVal ? V K hK hV ? N d := by
  intro n
  induction n using Nat.strongRecOn with
  | ind n ih =>

```

```

intro M N ? d hsum
cases M with
| var x =>
  cases N with
  | var y =>
    rw [eqB_encodeLamDKB_var_var, interpDKRelVal_var, interpDKRelVal_var]
    have hxy : eqB (V.child x) (V.child y) = (oid V).eq x y :=
      (oid_eq_of_total V hV x y).symm
    rw [hxy]
    exact ?.subst_left x y d
  | const j =>
    exact eqB_lamTag_mismatch_le (by decide : (0 : Nat) != 3)
      (V.child x) (K.child j)
  | abs y Q =>
    exact eqB_lamTag_mismatch_le (by decide : (0 : Nat) != 1)
      (V.child x) (opairB (V.child y) (encodeLamDKB V K Q))
  | app P' Q' =>
    exact eqB_lamTag_mismatch_le (by decide : (0 : Nat) != 2)
      (V.child x) (opairB (encodeLamDKB V K P') (encodeLamDKB V K Q'))
| const i =>
  cases N with
  | var y =>
    exact eqB_lamTag_mismatch_le (by decide : (3 : Nat) != 0)
      (K.child i) (V.child y)
  | const j =>
    rw [eqB_encodeLamDKB_const_const, interpDKRelVal_const,
      interpDKRelVal_const, oidSubsetRel_val, oidSubsetRel_val]
    refine le_inf ?_ ?_
    * exact (memB_eqB_left (K.child i) K (K.child j)).trans' <|
      le_inf (inf_le_right.trans inf_le_left) inf_le_left
    * exact (eqB_trans (K.child j) (K.child i) (?D.child d)).trans' <|
      le_inf (inf_le_left.trans_eq (eqB_comm (K.child i) (K.child j)))

```

Lean 4 source (lines 401–800)

```

      (inf_le_right.trans inf_le_right)
| abs y Q =>
  exact eqB_lamTag_mismatch_le (by decide : (3 : Nat) != 1)
    (K.child i) (opairB (V.child y) (encodeLamDKB V K Q))
| app P' Q' =>
  exact eqB_lamTag_mismatch_le (by decide : (3 : Nat) != 2)
    (K.child i) (opairB (encodeLamDKB V K P') (encodeLamDKB V K Q'))
| abs x P =>
  cases N with
  | var y =>
    exact eqB_lamTag_mismatch_le (by decide : (1 : Nat) != 0)
      (opairB (V.child x) (encodeLamDKB V K P)) (V.child y)
  | const j =>
    exact eqB_lamTag_mismatch_le (by decide : (1 : Nat) != 3)
      (opairB (V.child x) (encodeLamDKB V K P)) (K.child j)
| abs y Q =>
  rw [eqB_encodeLamDKB_abs_abs, interpDKRelVal_abs, interpDKRelVal_abs]
  refine le_inf ?_ ?_
  * exact (lamDKVal_encode_congr V K (.abs x P) (.abs y Q)).trans' <|
    le_inf (by
      rw [eqB_encodeLamDKB_abs_abs]
      exact inf_le_left) (inf_le_right.trans inf_le_left)
  * have hlt : P.weight + Q.weight < n := by
    rw [← hsum]
    simp [LamDK.weight]
    omega
  have hbody :
    eqB (V.child x) (V.child y) sqcap
    eqB (encodeLamDKB V K P) (encodeLamDKB V K Q) <=

```

```

    eqB (interpDKBodyGraph ? V K hK hV ? x P)
      (interpDKBodyGraph ? V K hK hV ? y Q) := by
  apply le_eqB_mk_of_le_val
    (fun p : ?D.idx x ?D.idx =>
      opairB (?D.child p.1) (?D.child p.2))
* intro p
  have hkey :=
    interpDKRelVal_update_key ? V K hK hV ? x y p.1 P p.2
  have hxy : eqB (V.child x) (V.child y) = (oid V).eq x y := by
    (oid_eq_of_total V hV x y).symm
  have hPQ :=
    ih (P.weight + Q.weight) hlt P Q
    (?update hV ?total y p.1) p.2 rfl
  let s :=
    (eqB (V.child x) (V.child y) sqcap
      eqB (encodeLamDKB V K P) (encodeLamDKB V K Q)) sqcap
    interpDKRelVal ? V K hK hV
    (?update hV ?total x p.1) P p.2
  have hxy' : s <= (oid V).eq x y := by
    rw [← hxy]
    exact inf_le_left.trans inf_le_left
  have hPx : s <= interpDKRelVal ? V K hK hV
    (?update hV ?total x p.1) P p.2 := inf_le_right
  have hPy : s <= interpDKRelVal ? V K hK hV
    (?update hV ?total y p.1) P p.2 :=
    hkey.trans' (le_inf hxy' hPx)
  have henc : s <= eqB (encodeLamDKB V K P)
    (encodeLamDKB V K Q) :=
    inf_le_left.trans inf_le_right
  exact hPQ.trans' (le_inf henc hPy)
* intro p
  have hkey :=
    interpDKRelVal_update_key ? V K hK hV ? y x p.1 Q p.2
  have hyx : eqB (V.child y) (V.child x) = (oid V).eq y x :=
    (oid_eq_of_total V hV y x).symm
  have hQP :=
    ih (Q.weight + P.weight) (by
      rw [← hsum]
      simp [LamDK.weight]
      omega)
    Q P (?update hV ?total x p.1) p.2 rfl
  let s :=
    (eqB (V.child x) (V.child y) sqcap
      eqB (encodeLamDKB V K P) (encodeLamDKB V K Q)) sqcap
    interpDKRelVal ? V K hK hV
    (?update hV ?total y p.1) Q p.2
  have hyx' : s <= (oid V).eq y x := by
    rw [← hyx, eqB_comm]
    exact inf_le_left.trans inf_le_left
  have hQy : s <= interpDKRelVal ? V K hK hV
    (?update hV ?total y p.1) Q p.2 := inf_le_right
  have hQx : s <= interpDKRelVal ? V K hK hV
    (?update hV ?total x p.1) Q p.2 :=
    hkey.trans' (le_inf hyx' hQy)
  have henc : s <= eqB (encodeLamDKB V K P)
    (encodeLamDKB V K Q) := by
    rw [eqB_comm]
    exact inf_le_left.trans inf_le_right
  exact hQP.trans' (le_inf henc hQx)
refine (memB_opairB_congr ?Lam
  (interpDKBodyGraph ? V K hK hV ? x P)
  (interpDKBodyGraph ? V K hK hV ? y Q)
  (?D.child d) (?D.child d)).trans' ?_

```

```

    refine le_inf (le_inf ?_ ?_) ?_
    * exact (inf_le_left.trans hbody)
    * exact le_top.trans (eqB_self (A := A) (?.D.child d)).ge
    * exact inf_le_right.trans inf_le_right
| app P' Q' =>
  exact eqB_lamTag_mismatch_le (by decide : (1 : Nat) != 2)
    (opairB (V.child x) (encodeLamDKB V K P))
    (opairB (encodeLamDKB V K P') (encodeLamDKB V K Q'))
| app P Q =>
  cases N with
  | var y =>
    exact eqB_lamTag_mismatch_le (by decide : (2 : Nat) != 0)
      (opairB (encodeLamDKB V K P) (encodeLamDKB V K Q)) (V.child y)
  | const j =>
    exact eqB_lamTag_mismatch_le (by decide : (2 : Nat) != 3)
      (opairB (encodeLamDKB V K P) (encodeLamDKB V K Q)) (K.child j)
  | abs y Q' =>
    exact eqB_lamTag_mismatch_le (by decide : (2 : Nat) != 1)
      (opairB (encodeLamDKB V K P) (encodeLamDKB V K Q))
      (opairB (V.child y) (encodeLamDKB V K Q'))
| app P' Q' =>
  rw [eqB_encodeLamDKB_app_app, interpDKRelVal_app, interpDKRelVal_app]
  rw [inf_iSup_eq]
  refine iSup_le fun c => le_iSup_of_le c ?_
  rw [inf_iSup_eq]
  refine iSup_le fun q' => le_iSup_of_le q' ?_
  rw [inf_iSup_eq]
  refine iSup_le fun p => le_iSup_of_le p ?_
  rw [inf_iSup_eq]
  refine iSup_le fun q => le_iSup_of_le q ?_
  let t :=
    (eqB (encodeLamDKB V K P) (encodeLamDKB V K P') sqcap
      eqB (encodeLamDKB V K Q) (encodeLamDKB V K Q')) sqcap
    (interpDKRelVal ? V K hK hV ? P p sqcap
      interpDKRelVal ? V K hK hV ? Q q sqcap
      memB (opairB (?.D.child p) (?.C.child c)) ?.Fun sqcap
      (oid ?.D).eq q q' sqcap
      memB (?.C.child c) ?.C sqcap
      memB (opairB (?.D.child q') (?.D.child d))
        (?.C.child c))
  change t <=
    interpDKRelVal ? V K hK hV ? P' p sqcap
    interpDKRelVal ? V K hK hV ? Q' q sqcap
    memB (opairB (?.D.child p) (?.C.child c)) ?.Fun sqcap
    (oid ?.D).eq q q' sqcap
    memB (?.C.child c) ?.C sqcap
    memB (opairB (?.D.child q') (?.D.child d))
      (?.C.child c)
  have hP : P.weight + P'.weight < n := by
    rw [← hsum]
    simp [LamDK.weight]
    omega
  have hQlt : Q.weight + Q'.weight < n := by
    rw [← hsum]
    simp [LamDK.weight]
    omega
  have hPval :=
    ih (P.weight + P'.weight) hP P P' ? p rfl
  have hQval :=
    ih (Q.weight + Q'.weight) hQlt Q Q' ? q rfl
  refine le_inf (le_inf (le_inf (le_inf (le_inf ?_ ?_) ?_) ?_) ?_) ?_
  * exact hPval.trans' <|
    le_inf (inf_le_left.trans inf_le_left)

```

```

      (inf_le_right.trans (inf_le_left.trans
        (inf_le_left.trans (inf_le_left.trans
          (inf_le_left.trans inf_le_left))))))
    * exact hQval.trans' <|
      le_inf (inf_le_left.trans inf_le_right)
        (inf_le_right.trans (inf_le_left.trans
          (inf_le_left.trans (inf_le_left.trans
            (inf_le_left.trans inf_le_right))))))
    * exact inf_le_right.trans (inf_le_left.trans
      (inf_le_left.trans (inf_le_left.trans inf_le_right)))
    * exact inf_le_right.trans (inf_le_left.trans
      (inf_le_left.trans inf_le_right))
    * exact inf_le_right.trans (inf_le_left.trans inf_le_right)
    * exact inf_le_right.trans inf_le_right
  exact this _ M N ? d rfl

/-!
## Application wrapper at native degrees
-/

/-- Induction-ready application continuity: constructor IHs arrive at
`lamDKVal P` and `lamDKVal Q` separately. -/
theorem interpDKBodyGraph_app_le_scottContinuous_meet
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?D = top )
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?D))
  (x : V.idx) (P Q : LamDK V.idx K.idx)
  (hP : forall d, IsRelElementAt ?D (lamDKVal V K P)
    (interpDKRelVal ? V K hK hV
      (? .update hV ? .total x d) P))
  (hQ : forall d, IsRelElementAt ?D (lamDKVal V K Q)
    (interpDKRelVal ? V K hK hV
      (? .update hV ? .total x d) Q))
  (hPsc : lamDKVal V K P <= isScottContinuousB
    (interpDKBodyGraph ? V K hK hV ? x P) ?D ?D ?R ?R)
  (hQsc : lamDKVal V K Q <= isScottContinuousB
    (interpDKBodyGraph ? V K hK hV ? x Q) ?D ?D ?R ?R) :
  lamDKVal V K P sqcap lamDKVal V K Q <=
  isScottContinuousB
    (interpDKBodyGraph ? V K hK hV ? x (.app P Q))
    ?D ?D ?R ?R := by
  let a := lamDKVal V K P sqcap lamDKVal V K Q
  have happ : forall d, IsRelElementAt ?D a
    (interpDKRelVal ? V K hK hV
      (? .update hV ? .total x d) (.app P Q)) :=
  fun d =>
    interpDKRelVal_app_isRelElementAt ? V K hK hV
      (? .update hV ? .total x d) P Q (hP d) (hQ d)
  have hfun : a <= isFunctionB
    (interpDKBodyGraph ? V K hK hV ? x (.app P Q)) ?D ?D :=
  interpDKBodyGraph_le_isFunctionB ? V K hK hV ? x (.app P Q) a happ
  have hPsc' : a <= isScottContinuousB
    (interpDKBodyGraph ? V K hK hV ? x P) ?D ?D ?R ?R :=
  inf_le_left.trans hPsc
  have hQsc' : a <= isScottContinuousB
    (interpDKBodyGraph ? V K hK hV ? x Q) ?D ?D ?R ?R :=
  inf_le_right.trans hQsc
  unfold isScottContinuousB
  refine le_inf (le_inf ?_ ?_) ?_
  * exact hfun
  * refine le_iInf fun u => le_iInf fun u' =>
    le_iInf fun v => le_iInf fun v' => ?_

```

```

rw [le_himp_iff]
exact (interpDKBodyGraph_app_apply_mono
  ? V K hK hV ? x P Q (lamDKVal V K P sqcap lamDKVal V K Q)
  hPsc' hQsc' u u' v v').trans' <| by
  apply le_of_eq
  ac_rfl
* refine le_iInf fun S => le_iInf fun u => le_iInf fun v => ?_
rw [le_himp_iff]
exact (interpDKBodyGraph_app_mapsToSup
  ? V K hK hV ? x P Q (lamDKVal V K P sqcap lamDKVal V K Q)
  hfun hPsc' hQsc' S u v).trans' <| by
  apply le_of_eq
  ac_rfl

/-!
## Term induction
-/

theorem interpDK_term_induction
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top)
  (hV : (oid V).IsTotal)
  (M : LamDK V.idx K.idx) :
  forall (? : RelFun (oid V) (oid ?.D)),
  IsRelElementAt ?.D (lamDKVal V K M)
  (interpDKRelVal ? V K hK hV ? M) /\
  forall (x : V.idx),
  lamDKVal V K M <=
  isScottContinuousB
  (interpDKBodyGraph ? V K hK hV ? x M)
  ?.D ?.D ?.R ?.R := by
induction M with
| var x =>
  intro ?
  exact <interpDKRelVal_var_isRelElementAt ? V K hK hV ? x,
    fun y => le_top.trans
      (interpDKBodyGraph_any_var_scottContinuous ? V K hK hV ? y x).ge>
| const k =>
  intro ?
  exact <interpDKRelVal_const_isRelElementAt ? V K hK hV ? k,
    fun y => interpDKBodyGraph_const_le_scottContinuous
      ? V K hK hV ? y k>
| app P Q ihP ihQ =>
  intro ?
  refine <interpDKRelVal_app_isRelElementAt ? V K hK hV ? P Q
    (ihP ?).1 (ihQ ?).1, fun x => ?_>
  exact interpDKBodyGraph_app_le_scottContinuous_meet
    ? V K hK hV ? x P Q
    (fun d => (ihP (? .update hV ?.total x d)).1)
    (fun d => (ihQ (? .update hV ?.total x d)).1)
    ((ihP ?).2 x) ((ihQ ?).2 x)
| abs x P ih =>
  intro ?
  constructor
  * have h :=
    interpDKRelVal_abs_isRelElementAt ? V K hK hV ? x P
    (lamDKVal V K P) ((ih ?).2 x)
    (fun d => (ih (? .update hV ?.total x d)).1)
  refine IsRelElementAt.congr_degree h ?_
  change lamDKVal V K P sqcap
    (memB (V.child x) V sqcap lamDKVal V K P) =
    memB (V.child x) V sqcap lamDKVal V K P
  ac_rfl

```

```

* intro y
  have h :=
    interpDKBodyGraph_abs_le_scottContinuous ? V K hK hV ? y x P
    (lamDKVal V K P)
    (fun d => (ih (? .update hV ?.total y d)).2 x)
    (fun d e =>
      (ih ((?.update hV ?.total y d).update hV ?.total x e)).1)
    (fun z => (ih (? .update hV ?.total x z)).2 y)
    (fun z d =>
      (ih ((?.update hV ?.total x z).update hV ?.total y d)).1)
  refine h.trans' ?_
  rw [lamDKVal]
  exact le_inf (le_inf inf_le_right inf_le_left) inf_le_right

theorem interpDKRelVal_isRelElementAt
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top )
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?.D))
  (M : LamDK V.idx K.idx) :
  IsRelElementAt ?.D (lamDKVal V K M)
  (interpDKRelVal ? V K hK hV ? M) :=
  (interpDK_term_induction ? V K hK hV M ?).1

theorem interpDKBodyGraph_le_scottContinuous
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top )
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?.D))
  (x : V.idx) (M : LamDK V.idx K.idx) :
  lamDKVal V K M <=
  isScottContinuousB
  (interpDKBodyGraph ? V K hK hV ? x M)
  ?.D ?.D ?.R ?.R :=
  (interpDK_term_induction ? V K hK hV M ?).2 x

/-!
## Evaluator name
-/

/-- Relational function assembled from the term-indexed evaluation rows. -/
noncomputable def InternalReflexiveModel.interpDKRel
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top )
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?.D)) :
  RelFun (oid (lamDKB ?.D V K)) (oid ?.D) where
  val M d :=
    interpDKRelVal ? V K hK hV ? (asLamDK ?.D V K M) d
  respects := by
    intro M N d e
    refine le_inf ?_ ?_ <;> rw [le_himp_iff]
  * let t :=
      (oid (lamDKB ?.D V K)).eq M N sqcap (oid ?.D).eq d e sqcap
      interpDKRelVal ? V K hK hV ? (asLamDK ?.D V K M) d
    have henc :
      t <= eqB (encodeLamDKB V K (asLamDK ?.D V K M))
        (encodeLamDKB V K (asLamDK ?.D V K N)) := by
        rw [asLamDK_encode, asLamDK_encode]
        exact (oid_eq_le_eqB_child _ M N).trans'
          (inf_le_left.trans inf_le_left)
    have hval :
      t <= interpDKRelVal ? V K hK hV ? (asLamDK ?.D V K M) d :=

```

```

    inf_le_right
  have hN :
    t <= interpDKRelVal ? V K hK hV ? (asLamDK ?.D V K N) d :=
      (interpDKRelVal_encode_congr ? V K hK hV ?
        (asLamDK ?.D V K M) (asLamDK ?.D V K N) d).trans'
        (le_inf henc hval)
  have hde : t <= (oid ?.D).eq d e := inf_le_left.trans inf_le_right
  exact (interpDKRelVal_isRelElementAt ? V K hK hV ?
    (asLamDK ?.D V K N)).respects d e |>.trans' (le_inf hde hN)
* let t :=
  (oid (lamDKB ?.D V K)).eq M N sqcap (oid ?.D).eq d e sqcap
  interpDKRelVal ? V K hK hV ? (asLamDK ?.D V K N) e
  have henc :
    t <= eqB (encodeLamDKB V K (asLamDK ?.D V K N))
      (encodeLamDKB V K (asLamDK ?.D V K M)) := by
      rw [asLamDK_encode, asLamDK_encode, eqB_comm]
      exact (oid_eq_le_eqB_child _ M N).trans'
        (inf_le_left.trans inf_le_left)
  have hval :
    t <= interpDKRelVal ? V K hK hV ? (asLamDK ?.D V K N) e :=
      inf_le_right
  have hM :
    t <= interpDKRelVal ? V K hK hV ? (asLamDK ?.D V K M) e :=
      (interpDKRelVal_encode_congr ? V K hK hV ?
        (asLamDK ?.D V K N) (asLamDK ?.D V K M) e).trans'
        (le_inf henc hval)
  have hde : t <= (oid ?.D).eq e d := by
    rw [(oid ?.D).symm]
    exact inf_le_left.trans inf_le_right
  exact (interpDKRelVal_isRelElementAt ? V K hK hV ?
    (asLamDK ?.D V K M)).respects e d |>.trans' (le_inf hde hM)
le_eps := by
  intro M d
  have h :=
    (interpDKRelVal_isRelElementAt ? V K hK hV ?
      (asLamDK ?.D V K M)).2.1 d
  rw [oid_eps, oid_eps]
  refine le_inf ?_ ?_
* have hmem :=
  lamDKVal_le_memB ?.D V K (asLamDK ?.D V K M)
  rw [asLamDK_encode] at hmem
  exact hmem.trans' (h.trans inf_le_left)
* rw [oid_eps] at h
  exact h.trans inf_le_right
single_valued := by
  intro M d e
  exact (interpDKRelVal_isRelElementAt ? V K hK hV ?
    (asLamDK ?.D V K M)).2.2.1 d e
total := by
  intro M
  rw [oid_eps, memB_lamDKB]
  refine iSup_le fun N => ?_
  have htot :=
    (interpDKRelVal_isRelElementAt ? V K hK hV ? N).2.2.2
  refine (le_inf le_rfl (inf_le_right.trans htot)).trans ?_
  rw [inf_iSup_eq]

```

Lean 4 source (lines 801–1200)

```

refine iSup_le fun d => le_iSup_of_le d ?_
refine (interpDKRelVal_encode_congr ? V K hK hV ? N
  (asLamDK ?.D V K M) d).trans' ?_
calc
  eqB ((lamDKB ?.D V K).child M) (encodeLamDKB V K N) sqcap

```



```

    lamDKVal V K N sqcap interpDKRelVal ? V K hK hV ? N d
  = eqB (encodeLamDKB V K (asLamDK ?.D V K M))
    (encodeLamDKB V K N) sqcap
    lamDKVal V K N sqcap interpDKRelVal ? V K hK hV ? N d := by
    rw [asLamDK_encode]
  _ <= eqB (encodeLamDKB V K (asLamDK ?.D V K M))
    (encodeLamDKB V K N) sqcap
    interpDKRelVal ? V K hK hV ? N d :=
    le_inf (inf_le_left.trans inf_le_left) inf_le_right
  _ = eqB (encodeLamDKB V K N)
    (encodeLamDKB V K (asLamDK ?.D V K M)) sqcap
    interpDKRelVal ? V K hK hV ? N d := by
    rw [eqB_comm (encodeLamDKB V K (asLamDK ?.D V K M))
      (encodeLamDKB V K N)]

@[simp] theorem InternalReflexiveModel.interpDKRel_val
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top )
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?.D))
  (M : (lamDKB ?.D V K).idx) (d : ?.D.idx) :
  (interpDKRel ? V K hK hV ?).val M d =
  interpDKRelVal ? V K hK hV ? (asLamDK ?.D V K M) d :=
  rfl

noncomputable def InternalReflexiveModel.interpDKGraph
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top )
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?.D)) :
  AName.{u} A :=
  AName.mk (LamDK V.idx K.idx x ?.D.idx)
  (fun p => opairB (encodeLamDKB V K p.1) (?.D.child p.2))
  (fun p => interpDKRelVal ? V K hK hV ? p.1 p.2)

theorem InternalReflexiveModel.interpDKGraph_eq_relFunGraphName
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top )
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?.D)) :
  interpDKGraph ? V K hK hV ? =
  relFunGraphName (lamDKB ?.D V K) ?.D
  (interpDKRel ? V K hK hV ?) := by
  unfold interpDKGraph relFunGraphName interpDKRel lamDKB asLamDK
  rfl

theorem InternalReflexiveModel.interpDKGraph_isFunctionB
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top )
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?.D)) :
  isFunctionB (interpDKGraph ? V K hK hV ?)
  (lamDKB ?.D V K) ?.D = top := by
  rw [interpDKGraph_eq_relFunGraphName]
  exact isFunctionB_relFunGraphName _ _ _

theorem InternalReflexiveModel.interpDKGraph_isFunctionB_of_valuation
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top )
  (hV : (oid V).IsTotal)
  (Dom Rho : AName.{u} A)
  (hVal : isValuationB V ?.D Dom Rho = top ) :
  isFunctionB

```

```

      (interpDKGraph ? V K hK hV
        (totalizedValuationRelOfValid V ?.D Dom Rho hVal
          ?.total ?.complete))
      (lamDKB ?.D V K) ?.D = top :=
    interpDKGraph_isFunctionB ? V K hK hV _

/-!
## Pure-term restriction
-/

theorem encodeLamDKB_ofLam (V K : AName.{u} A) (M : Lam V.idx) :
  encodeLamDKB V K (LamDK.ofLam M) = encodeLamB V M := by
  induction M with
  | var x => rfl
  | abs x P ih =>
    simp only [LamDK.ofLam, encodeLamDKB, encodeLamB, ih]
  | app P Q ihP ihQ =>
    simp only [LamDK.ofLam, encodeLamDKB, encodeLamB, ihP, ihQ]

theorem encodeLamDKB_ofLam_asLam
  (V K : AName.{u} A) (M : (lamB V).idx) :
  encodeLamDKB V K (LamDK.ofLam (asLam V M)) = (lamB V).child M := by
  rw [encodeLamDKB_ofLam, asLam_encode]

theorem lamDKVal_ofLam (V K : AName.{u} A) (hV : (oid V).IsTotal)
  (M : Lam V.idx) :
  lamDKVal V K (LamDK.ofLam M) = top := by
  induction M with
  | var x =>
    change memB (V.child x) V = top
    rw [← oid_eps]
    exact hV x
  | abs x P ih =>
    rw [LamDK.ofLam, lamDKVal, ih, inf_top_eq]
    rw [← oid_eps]
    exact hV x
  | app P Q ihP ihQ =>
    rw [LamDK.ofLam, lamDKVal, ihP, ihQ, inf_top_eq]

noncomputable def InternalReflexiveModel.interpDKPureRel
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top)
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?.D)) :
  RelFun (oid (lamB V)) (oid ?.D) where
  val M d :=
    interpDKRelVal ? V K hK hV ? (LamDK.ofLam (asLam V M)) d
  respects := by
    intro M N d e
    refine le_inf ?_ ?_ <;> rw [le_himp_iff]
    * let t :=
        (oid (lamB V)).eq M N sqcap (oid ?.D).eq d e sqcap
        interpDKRelVal ? V K hK hV ? (LamDK.ofLam (asLam V M)) d
      have henc :
        t <= eqB (encodeLamDKB V K (LamDK.ofLam (asLam V M)))
          (encodeLamDKB V K (LamDK.ofLam (asLam V N))) := by
          rw [encodeLamDKB_ofLam_asLam, encodeLamDKB_ofLam_asLam]
          exact (oid_eq_le_eqB_child _ M N).trans'
            (inf_le_left.trans inf_le_left)
      have hval :
        t <= interpDKRelVal ? V K hK hV ?
          (LamDK.ofLam (asLam V M)) d := inf_le_right
      have hN :

```

```

      t <= interpDKRelVal ? V K hK hV ?
        (LamDK.ofLam (asLam V N)) d :=
      (interpDKRelVal_encode_congr ? V K hK hV ?
        (LamDK.ofLam (asLam V M)) (LamDK.ofLam (asLam V N)) d).trans'
      (le_inf henc hval)
    have hde : t <= (oid ?.D).eq d e := inf_le_left.trans inf_le_right
    exact (interpDKRelVal_isRelElementAt ? V K hK hV ?
      (LamDK.ofLam (asLam V N))).respects d e |>.trans'
      (le_inf hde hN)
  * let t :=
    (oid (lamB V)).eq M N sqcap (oid ?.D).eq d e sqcap
    interpDKRelVal ? V K hK hV ? (LamDK.ofLam (asLam V N)) e
  have henc :
    t <= eqB (encodeLamDKB V K (LamDK.ofLam (asLam V N)))
      (encodeLamDKB V K (LamDK.ofLam (asLam V M))) := by
    rw [encodeLamDKB_ofLam_asLam, encodeLamDKB_ofLam_asLam, eqB_comm]
    exact (oid_eq_le_eqB_child _ M N).trans'
      (inf_le_left.trans inf_le_left)
  have hval :
    t <= interpDKRelVal ? V K hK hV ?
      (LamDK.ofLam (asLam V N)) e := inf_le_right
  have hM :
    t <= interpDKRelVal ? V K hK hV ?
      (LamDK.ofLam (asLam V M)) e :=
    (interpDKRelVal_encode_congr ? V K hK hV ?
      (LamDK.ofLam (asLam V N)) (LamDK.ofLam (asLam V M)) e).trans'
      (le_inf henc hval)
  have hde : t <= (oid ?.D).eq e d := by
    rw [(oid ?.D).symm]
    exact inf_le_left.trans inf_le_right
  exact (interpDKRelVal_isRelElementAt ? V K hK hV ?
    (LamDK.ofLam (asLam V M))).respects e d |>.trans'
    (le_inf hde hM)
le_eps := by
  intro M d
  have h :=
    (interpDKRelVal_isRelElementAt ? V K hK hV ?
      (LamDK.ofLam (asLam V M))).2.1 d
  rw [lamDKVal_ofLam V K hV (asLam V M), top_inf_eq] at h
  rw [oid_eps, oid_eps]
  refine le_inf ?_ ?_
  * have hmem : memB ((lamB V).child M) (lamB V) = top := by
    rw [← asLam_encode V M]
    exact memB_encodeLamB V (asLam V M)
    exact le_top.trans hmem.ge
  * rw [oid_eps] at h
    exact h
single_valued := by
  intro M d e
  exact (interpDKRelVal_isRelElementAt ? V K hK hV ?
    (LamDK.ofLam (asLam V M))).2.2.1 d e
total := by
  intro M
  rw [oid_eps]
  have hmem : memB ((lamB V).child M) (lamB V) = top := by
    rw [← asLam_encode V M]
    exact memB_encodeLamB V (asLam V M)
  rw [hmem]
  have htot :=
    (interpDKRelVal_isRelElementAt ? V K hK hV ?
      (LamDK.ofLam (asLam V M))).2.2.2
  rwa [lamDKVal_ofLam V K hV (asLam V M)] at htot

```

```

noncomputable def InternalReflexiveModel.interpDKPureGraph
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top )
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?.D)) :
  AName.{u} A :=
  relFunGraphName (lamB V) ?.D (interpDKPureRel ? V K hK hV ?)

theorem InternalReflexiveModel.interpDKPureGraph_eq_relFunGraphName
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top )
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?.D)) :
  interpDKPureGraph ? V K hK hV ? =
  relFunGraphName (lamB V) ?.D
  (interpDKPureRel ? V K hK hV ?) :=
  rfl

theorem InternalReflexiveModel.interpDKPureGraph_isFunctionB
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top )
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?.D)) :
  isFunctionB (interpDKPureGraph ? V K hK hV ?) (lamB V) ?.D = top := by
  rw [interpDKPureGraph_eq_relFunGraphName]
  exact isFunctionB_relFunGraphName _ _ _

theorem InternalReflexiveModel.interpDKPureGraph_isFunctionB_of_valuation
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top )
  (hV : (oid V).IsTotal)
  (Dom Rho : AName.{u} A)
  (hVal : isValuationB V ?.D Dom Rho = top ) :
  isFunctionB
  (interpDKPureGraph ? V K hK hV
    (totalizedValuationRelOfValid V ?.D Dom Rho hVal
      ?.total ?.complete))
  (lamB V) ?.D = top :=
  interpDKPureGraph_isFunctionB ? V K hK hV _

/-!
## Definition 25 clauses at the term extent
-/

/-- Graph membership recovers the evaluation row at the term?s Boolean
extent. -/
theorem InternalReflexiveModel.interpDKGraph_eval
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top )
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?.D))
  (M : LamDK V.idx K.idx) (d : ?.D.idx) :
  lamDKVal V K M sqcap
  memB (opairB (encodeLamDKB V K M) (?.D.child d))
  (interpDKGraph ? V K hK hV ?) =
  interpDKRelVal ? V K hK hV ? M d := by
  apply le_antisymm
  * unfold interpDKGraph
  rw [memB_mk, inf_iSup_eq]
  refine iSup_le fun p => ?_
  rw [eqB_opairB]
  let t :=
    lamDKVal V K M sqcap

```

```

      ((eqB (encodeLamDKB V K M) (encodeLamDKB V K p.1) sqcap
        eqB (?D.child d) (?D.child p.2)) sqcap
      interpDKRelVal ? V K hK hV ? p.1 p.2)
change t <= interpDKRelVal ? V K hK hV ? M d
have henc : t <= eqB (encodeLamDKB V K p.1) (encodeLamDKB V K M) := by
  rw [eqB_comm]
  exact inf_le_right.trans (inf_le_left.trans inf_le_left)
have hval : t <= interpDKRelVal ? V K hK hV ? p.1 p.2 :=
  inf_le_right.trans inf_le_right
have hM :
  t <= interpDKRelVal ? V K hK hV ? M p.2 :=
  (interpDKRelVal_encode_congr ? V K hK hV ? p.1 M p.2).trans'
  (le_inf henc hval)
have hde : t <= (oid ?D).eq p.2 d := by
  rw [oid_eq_of_total ?D ?.total, eqB_comm]
  exact inf_le_right.trans (inf_le_left.trans inf_le_right)
exact (interpDKRelVal_isRelElementAt ? V K hK hV ? M).respects p.2 d
|>.trans' (le_inf hde hM)
* have hsupp :
  interpDKRelVal ? V K hK hV ? M d <= lamDKVal V K M :=
  ((interpDKRelVal_isRelElementAt ? V K hK hV ? M).2.1 d).trans
  inf_le_left
exact le_inf hsupp
  (val_le_memB (interpDKGraph ? V K hK hV ?) (M, d))

/-- Definition 25, variable clause, at the term extent. -/
theorem InternalReflexiveModel.interpDKGraph_var
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?D = top)
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?D))
  (x : V.idx) (d : ?D.idx) :
  lamDKVal V K (.var x) sqcap
    memB (opairB (encodeLamDKB V K (.var x)) (?D.child d))
      (interpDKGraph ? V K hK hV ?) =
    interpDKRelVal ? V K hK hV ? (.var x) d :=
  interpDKGraph_eval ? V K hK hV ? (.var x) d

theorem InternalReflexiveModel.interpDKGraph_var_val
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?D = top)
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?D))
  (x : V.idx) (d : ?D.idx) :
  lamDKVal V K (.var x) sqcap
    memB (opairB (encodeLamDKB V K (.var x)) (?D.child d))
      (interpDKGraph ? V K hK hV ?) =
    ?.val x d := by
  rw [interpDKGraph_var, interpDKRelVal_var]

/-- Definition 25, constant clause, at the term extent. -/
theorem InternalReflexiveModel.interpDKGraph_const
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?D = top)
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?D))
  (k : K.idx) (d : ?D.idx) :
  lamDKVal V K (.const k) sqcap
    memB (opairB (encodeLamDKB V K (.const k)) (?D.child d))
      (interpDKGraph ? V K hK hV ?) =
    interpDKRelVal ? V K hK hV ? (.const k) d :=
  interpDKGraph_eval ? V K hK hV ? (.const k) d

```

```

theorem InternalReflexiveModel.interpDKGraph_const_val
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top )
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?.D))
  (k : K.idx) (d : ?.D.idx) :
  lamDKVal V K (.const k) sqcap
    memB (opairB (encodeLamDKB V K (.const k)) (?.D.child d))
      (interpDKGraph ? V K hK hV ?) =
    (oidSubsetRel K ?.D hK).val k d := by
  rw [interpDKGraph_const, interpDKRelVal_const]

/-- Definition 25, application clause, at the term extent. -/
theorem InternalReflexiveModel.interpDKGraph_app
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top )
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?.D))
  (P Q : LamDK V.idx K.idx) (d : ?.D.idx) :
  lamDKVal V K (.app P Q) sqcap
    memB (opairB (encodeLamDKB V K (.app P Q)) (?.D.child d))
      (interpDKGraph ? V K hK hV ?) =
    interpDKRelVal ? V K hK hV ? (.app P Q) d :=
  interpDKGraph_eval ? V K hK hV ? (.app P Q) d

theorem InternalReflexiveModel.interpDKGraph_app_val
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top )
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?.D))
  (P Q : LamDK V.idx K.idx) (d : ?.D.idx) :
  lamDKVal V K (.app P Q) sqcap
    memB (opairB (encodeLamDKB V K (.app P Q)) (?.D.child d))
      (interpDKGraph ? V K hK hV ?) =
    bigcup c : ?.C.idx, bigcup q' : ?.D.idx, bigcup p : ?.D.idx,
    bigcup q : ?.D.idx,
    interpDKRelVal ? V K hK hV ? P p sqcap
    interpDKRelVal ? V K hK hV ? Q q sqcap
    memB (opairB (?.D.child p) (?.C.child c)) ?.Fun sqcap
    (oid ?.D).eq q q' sqcap
    memB (?.C.child c) ?.C sqcap
    memB (opairB (?.D.child q') (?.D.child d))
      (?.C.child c) := by
  rw [interpDKGraph_app, interpDKRelVal_app]

/-- Definition 25, abstraction clause, at the term extent. -/
theorem InternalReflexiveModel.interpDKGraph_abs
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top )
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?.D))
  (x : V.idx) (P : LamDK V.idx K.idx) (d : ?.D.idx) :
  lamDKVal V K (.abs x P) sqcap
    memB (opairB (encodeLamDKB V K (.abs x P)) (?.D.child d))
      (interpDKGraph ? V K hK hV ?) =
    interpDKRelVal ? V K hK hV ? (.abs x P) d :=
  interpDKGraph_eval ? V K hK hV ? (.abs x P) d

theorem InternalReflexiveModel.interpDKGraph_abs_val
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top )
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?.D))

```

```

(x : V.idx) (P : LamDK V.idx K.idx) (d : ?.D.idx) :
lamDKVal V K (.abs x P) sqcap
  memB (opairB (encodeLamDKB V K (.abs x P)) (?.D.child d))
    (interpDKGraph ? V K hK hV ?) =
lamDKVal V K (.abs x P) sqcap
  memB (opairB (interpDKBodyGraph ? V K hK hV ? x P)
    (?.D.child d)) ?.Lam := by
rw [interpDKGraph_abs, interpDKRelVal_abs]

theorem asLam_cast (V : AName.{u} A) (M : Lam V.idx) :
  asLam V (cast (Eq.symm (by rw [lamB, idx_mk] : (lamB V).idx = Lam V.idx)) M) =
  M := by
  apply eq_of_heq
  unfold asLam
  exact (cast_heq _ _).trans (cast_heq _ _)

/-- Pure-graph counterpart of `interpDKGraph_eval`. -/

```

Lean 4 source (lines 1201–1600)

```

theorem interpDKPureGraph_eval
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top)
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?.D))
  (M : Lam V.idx) (d : ?.D.idx) :
  memB (opairB (encodeLamB V M) (?.D.child d))
    (InternalReflexiveModel.interpDKPureGraph ? V K hK hV ?) =
  interpDKRelVal ? V K hK hV ? (LamDK.ofLam M) d := by
let i : (lamB V).idx :=
  cast (Eq.symm (by rw [lamB, idx_mk] : (lamB V).idx = Lam V.idx)) M
have hchild : (lamB V).child i = encodeLamB V M := by
  rw [← asLam_encode, asLam_cast]
rw [InternalReflexiveModel.interpDKPureGraph, ← hchild,
  memB_opairB_relFunGraphName]
change interpDKRelVal ? V K hK hV ? (LamDK.ofLam (asLam V i)) d =
  interpDKRelVal ? V K hK hV ? (LamDK.ofLam M) d
rw [asLam_cast]

/-!
## Pure-term names and internal `LamEq` soundness
-/

/-- Distinct source keys are Boolean-unequal. This is the discreteness of a
crisp variable set, needed so environment update matches `Lam.substCA`. -/
def OidSeparated (V : AName.{u} A) : Prop :=
  forall i j : V.idx, i != j -> (oid V).eq i j = False

theorem RelFun.update_of_ne
  {X Y : Type*} {S : ASetoid (A := A) X} {T : ASetoid (A := A) Y}
  (f : RelFun S T) (hS : S.IsTotal) (hT : T.IsTotal)
  (x i : X) (d j : Y) (hne : S.eq i x = False) :
  (f.update hS hT x d).val i j = f.val i j := by
  rw [RelFun.update_val, hne, bot_inf_eq, bot_sup_eq, compl_bot, top_inf_eq]

theorem RelFun.update_overwrite
  {X Y : Type*} {S : ASetoid (A := A) X} {T : ASetoid (A := A) Y}
  (f : RelFun S T) (hS : S.IsTotal) (hT : T.IsTotal)
  (x : X) (d z : Y) :
  (f.update hS hT x d).update hS hT x z = f.update hS hT x z := by
  apply RelFun.ext
  intro i j
  have hxx : S.eq x x = top := hS x
  apply le_antisymm

```

```

* simp only [hxx, top_inf_eq] using
  RelFun.update_overwrite_val f hS hT x x d z i j
* simp only [hxx, top_inf_eq] using
  RelFun.update_overwrite_val_symm f hS hT x x d z i j

theorem RelFun.update_commute
  {X Y : Type*} {S : ASetoid (A := A) X} {T : ASetoid (A := A) Y}
  (f : RelFun S T) (hS : S.IsTotal) (hT : T.IsTotal)
  (x y : X) (d z : Y) (hne : S.eq x y = False) :
  (f.update hS hT y d).update hS hT x z =
    (f.update hS hT x z).update hS hT y d := by
  apply RelFun.ext
  intro i j
  apply le_antisymm
* simp only [hne, compl_bot, top_inf_eq] using
  RelFun.update_commute_val f hS hT x y d z i j
* simp only [hne, compl_bot, top_inf_eq] using
  RelFun.update_commute_val_symm f hS hT x y d z i j

/-- Mix a Definition 25 row to a `D`-index via completeness. -/
noncomputable def InternalReflexiveModel.interpDKName
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top )
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?.D))
  (M : LamDK V.idx K.idx) : ?.D.idx :=
functionalOfRel ?.complete
  (relFunOfIsRelElementAt
    (interpDKRelVal_isRelElementAt ? V K hK hV ? M))
  PUnit.unit

theorem InternalReflexiveModel.interpDKRelVal_eq_oid
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top )
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?.D))
  (M : LamDK V.idx K.idx)
  (hval : lamDKVal V K M = top ) (d : ?.D.idx) :
  interpDKRelVal ? V K hK hV ? M d =
    (oid ?.D).eq (interpDKName ? V K hK hV ? M) d := by
  have hgamma :=
    functionalOfRel_gamma ?.complete
    (relFunOfIsRelElementAt
      (interpDKRelVal_isRelElementAt ? V K hK hV ? M))
    PUnit.unit d
  simp only [gamma, relFunOfIsRelElementAt_val, extentSetoid_eps] at hgamma
  have heq :
    lamDKVal V K M sqcap
      (oid ?.D).eq (interpDKName ? V K hK hV ? M) d =
      (oid ?.D).eq (interpDKName ? V K hK hV ? M) d := by
    rw [hval, top_inf_eq]
  exact hgamma.symm.trans heq

theorem interpDKRelVal_ofLam_eq_oid
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top )
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?.D))
  (M : Lam V.idx) (d : ?.D.idx) :
  interpDKRelVal ? V K hK hV ? (LamDK.ofLam M) d =
    (oid ?.D).eq
      (InternalReflexiveModel.interpDKName ? V K hK hV ?
        (LamDK.ofLam M)) d :=

```



```

InternalReflexiveModel.interpDKRelVal_eq_oid ? V K hK hV ?
  (LamDK.ofLam M) (lamDKVal_ofLam V K hV M) d

theorem InternalReflexiveModel.interpDKName_spec
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top )
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?.D))
  (M : LamDK V.idx K.idx)
  (hval : lamDKVal V K M = top ) :
  interpDKRelVal ? V K hK hV ? M (interpDKName ? V K hK hV ? M) = top := by
  rw [InternalReflexiveModel.interpDKRelVal_eq_oid ? V K hK hV ? M hval]
  exact ?.total _

open InternalReflexiveModel
  (interpDKName interpDKPureGraph interpDKRelVal_eq_oid interpDKName_spec
    interpDKGraph)

theorem interpDKBodyGraph_eq_of
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top )
  (hV : (oid V).IsTotal)
  (?_1 ?_2 : RelFun (oid V) (oid ?.D))
  (x y : V.idx) (P Q : LamDK V.idx K.idx)
  (h : forall d e, interpDKRelVal ? V K hK hV (?_1.update hV ?.total x d) P e =
    interpDKRelVal ? V K hK hV (?_2.update hV ?.total y d) Q e) :
  interpDKBodyGraph ? V K hK hV ?_1 x P =
  interpDKBodyGraph ? V K hK hV ?_2 y Q := by
  refine congr_arg
    (AName.mk (?_1.D.idx x ?_2.D.idx)
      (fun p => opairB (?_1.D.child p.1) (?_2.D.child p.2))) ?_
  exact funext fun p => h p.1 p.2

/-- Environment update is invisible to a term that does not mention the key. -/
theorem interpDKRelVal_update_fresh
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top )
  (hV : (oid V).IsTotal)
  (hVsep : OidSeparated V)
  [DecidableEq V.idx]
  (? : RelFun (oid V) (oid ?.D))
  (M : Lam V.idx) (x : V.idx) (hx : x notin M.fv)
  (d e : ?.D.idx) :
  interpDKRelVal ? V K hK hV (?_1.update hV ?.total x d)
    (LamDK.ofLam M) e =
  interpDKRelVal ? V K hK hV ? (LamDK.ofLam M) e := by
  induction M generalizing ? d e with
  | var y =>
    have hyx : y != x := by
      intro h
      subst h
      exact hx (by simp [Lam.fv])
    simp only [LamDK.ofLam, interpDKRelVal_var]
    rw [RelFun.update_of_ne (hne := hVsep y x hyx)]
  | app P Q ihP ihQ =>
    have hP : x notin P.fv := fun h =>
      hx (Finset.mem_union.mpr (Or.inl h))
    have hQ : x notin Q.fv := fun h =>
      hx (Finset.mem_union.mpr (Or.inr h))
    simp only [LamDK.ofLam, interpDKRelVal_app]
    refine iSup_congr fun c => iSup_congr fun q' =>
      iSup_congr fun p => iSup_congr fun q => ?_
    rw [ihP ? hP d p, ihQ ? hQ d q]

```

```

| abs y P ih =>
  simp only [LamDK.ofLam, interpDKRelVal_abs]
  have hval : lamDKVal V K (LamDK.ofLam (Lam.abs y P)) = top :=
    lamDKVal_ofLam V K hV (Lam.abs y P)
  simp only [LamDK.ofLam] at hval
  simp only [hval, top_inf_eq]
  apply congr_arg (fun G => memB (opairB G (?D.child e)) ?Lam)
  apply interpDKBodyGraph_eq_of
  intro q e'
  by_cases hyx : y = x
  * subst hyx
    rw [RelFun.update_overwrite]
  * have hxP : x notin P.fv := by
    intro h
    exact hx (by
      simp only [Lam.fv, Finset.mem_sdiff, Finset.mem_singleton]
      exact <h, Ne.symm hyx>)
    rw [RelFun.update_commute ? hV ?.total y x d q (hVsep y x hyx)]
    exact ih (?update hV ?.total y q) hxP d e'

theorem RelFun.update_eq_of_target
  {X Y : Type*} {S : ASetoid (A := A) X} {T : ASetoid (A := A) Y}
  (f : RelFun S T) (hS : S.IsTotal) (hT : T.IsTotal)
  (x : X) (d_1 d_2 : Y) (hd : T.eq d_1 d_2 = top) :
  f.update hS hT x d_1 = f.update hS hT x d_2 :=
  RelFun.update_congr f f hS hT x d_1 d_2 (fun _ => rfl) hd

theorem InternalReflexiveModel.interpDKName_oid_eq_of_relVal
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top)
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?.D))
  (M : LamDK V.idx K.idx)
  (hval : lamDKVal V K M = top)
  (d : ?.D.idx)
  (h : forall e, interpDKRelVal ? V K hK hV ? M e = (oid ?.D).eq d e) :
  (oid ?.D).eq (interpDKName ? V K hK hV ? M) d = top := by
  rw [← InternalReflexiveModel.interpDKRelVal_eq_oid ? V K hK hV ? M hval, h]
  exact ?.total d

theorem interpDKName_oid_eq_of_fresh
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top)
  (hV : (oid V).IsTotal)
  (hVsep : OidSeparated V)
  [DecidableEq V.idx]
  (? : RelFun (oid V) (oid ?.D))
  (M : Lam V.idx) (x : V.idx) (hx : x notin M.fv) (d : ?.D.idx) :
  (oid ?.D).eq
    (interpDKName ? V K hK hV (?update hV ?.total x d)
      (LamDK.ofLam M))
    (interpDKName ? V K hK hV ? (LamDK.ofLam M)) = top := by
  rw [← interpDKRelVal_ofLam_eq_oid ? V K hK hV
    (?update hV ?.total x d) M
    (interpDKName ? V K hK hV ? (LamDK.ofLam M))]
  rw [interpDKRelVal_update_fresh ? V K hK hV hVsep ? M x hx d]
  exact interpDKName_spec ? V K hK hV ? (LamDK.ofLam M)
  (lamDKVal_ofLam V K hV M)

/-- Capture-free substitution: `?M[x := N]?_? = ?M?_{?[x := ?N]?}` when
`N` is free for `x` in `M`. -/
theorem interpDKRelVal_substNaive
  (? : InternalReflexiveModel (A := A))

```

```

(V K : AName.{u} A) (hK : subsetB K ?.D = top )
(hV : (oid V).IsTotal)
(hVsep : OidSeparated V)
[DecidableEq V.idx]
(? : RelFun (oid V) (oid ?.D))
(M N : Lam V.idx) (x : V.idx)
(hfree : M.FreeFor x N) (d : ?.D.idx) :
interpDKRelVal ? V K hK hV ?
  (LamDK.ofLam (M.substNaive x N)) d =
  interpDKRelVal ? V K hK hV
    (? .update hV ?.total x
      (interpDKName ? V K hK hV ? (LamDK.ofLam N)))
    (LamDK.ofLam M) d := by
induction M generalizing ? d with
| var y =>
  simp only [Lam.substNaive]
  by_cases hyx : y = x
  * subst hyx
    simp only [LamDK.ofLam, interpDKRelVal_var, RelFun.update_self]
    exact interpDKRelVal_ofLam_eq_oid ? V K hK hV ? N d
  * rw [if_neg hyx]
    simp only [LamDK.ofLam, interpDKRelVal_var]
    rw [RelFun.update_of_ne (hne := hVsep y x hyx)]
| app M_1 M_2 ih_1 ih_2 =>
  obtain <h_1, h_2> := hfree
  simp only [Lam.substNaive, LamDK.ofLam, interpDKRelVal_app]
  refine iSup_congr fun c => iSup_congr fun q' =>
    iSup_congr fun p => iSup_congr fun q => ?_
  rw [ih_1 ? h_1 p, ih_2 ? h_2 q]
| abs y P ih =>
  simp only [Lam.substNaive]
  split_ifs with hyx
  * simp only [LamDK.ofLam, interpDKRelVal_abs]
    have hval : lamDKVal V K (LamDK.ofLam (Lam.abs y P)) = top :=
      lamDKVal_ofLam V K hV (Lam.abs y P)
    simp only [LamDK.ofLam] at hval
    simp only [hval, top_inf_eq]
    apply congr_arg (fun G => memB (opairB G (?.D.child d)) ?.Lam)
    apply interpDKBodyGraph_eq_of
    intro q e
    cases hyx
    rw [RelFun.update_overwrite]
  * obtain <hP, hcap> := Lam.freeFor_abs_of_ne hyx hfree
    simp only [LamDK.ofLam, interpDKRelVal_abs]
    have hvalL : lamDKVal V K (LamDK.ofLam (Lam.abs y (P.substNaive x N))) = top :=
      lamDKVal_ofLam V K hV (Lam.abs y (P.substNaive x N))
    have hvalR : lamDKVal V K (LamDK.ofLam (Lam.abs y P)) = top :=
      lamDKVal_ofLam V K hV (Lam.abs y P)
    simp only [LamDK.ofLam] at hvalL hvalR
    simp only [hvalL, hvalR, top_inf_eq]
    apply congr_arg (fun G => memB (opairB G (?.D.child d)) ?.Lam)
    apply interpDKBodyGraph_eq_of
    intro q e
    have hcomm :
      (? .update hV ?.total x
        (interpDKName ? V K hK hV ? (LamDK.ofLam N))).update
        hV ?.total y q =
      (? .update hV ?.total y q).update hV ?.total x
        (interpDKName ? V K hK hV ? (LamDK.ofLam N)) :=
      RelFun.update_commute ? hV ?.total y x
        (interpDKName ? V K hK hV ? (LamDK.ofLam N)) q
        (hVsep y x hyx)
    cases hcap with

```

```

| inl hyN =>
  have hname :
    (oid ?.D).eq
      (interpDKName ? V K hK hV
        (?.update hV ?.total y q) (LamDK.ofLam N))
      (interpDKName ? V K hK hV ? (LamDK.ofLam N)) = top :=
    interpDKName_oid_eq_of_fresh ? V K hK hV hVsep ? N y hyN q
  have hupd :=
    RelFun.update_eq_of_target (?.update hV ?.total y q)
      hV ?.total x
      (interpDKName ? V K hK hV
        (?.update hV ?.total y q) (LamDK.ofLam N))
      (interpDKName ? V K hK hV ? (LamDK.ofLam N)) hname
  rw [hcomm, <- hupd]
  exact ih (?.update hV ?.total y q) hP e
| inr hxP =>
  have hsf : P.substNaive x N = P := Lam.subst_fresh N hxP
  rw [hsf, hcomm]
  exact (interpDKRelVal_update_fresh ? V K hK hV hVsep
    (?.update hV ?.total y q) P x hxP
    (interpDKName ? V K hK hV ? (LamDK.ofLam N)) e).symm

/-- Internal substitution lemma: `M[x := N]?_? = ?M?_{?[x := ?N?]}`. -/
theorem interpDKRelVal_substCA
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top)
  (hV : (oid V).IsTotal)
  (hVsep : OidSeparated V)
  [DecidableEq V.idx] [Infinite V.idx]
  (? : RelFun (oid V) (oid ?.D))
  (M N : Lam V.idx) (x : V.idx) (d : ?.D.idx) :
  interpDKRelVal ? V K hK hV ?
    (LamDK.ofLam (Lam.substCA M x N)) d =
  interpDKRelVal ? V K hK hV
    (?.update hV ?.total x
      (interpDKName ? V K hK hV ? (LamDK.ofLam N)))
    (LamDK.ofLam M) d := by
induction hsize : M.size using Nat.strong_induction_on
  generalizing M N x ? d with
| h k ih =>
  match M with
| .var y =>
  rw [Lam.substCA_var]
  by_cases hyx : y = x
  * subst hyx
    simp only [LamDK.ofLam, interpDKRelVal_var, RelFun.update_self]
    exact interpDKRelVal_ofLam_eq_oid ? V K hK hV ? N d
  * rw [if_neg hyx]
    simp only [LamDK.ofLam, interpDKRelVal_var]
    rw [RelFun.update_of_ne (hne := hVsep y x hyx)]
| .app M_1 M_2 =>
  have h_1 : M_1.size < k := by
    simp [Lam.size] at hsize; omega
  have h_2 : M_2.size < k := by
    simp [Lam.size] at hsize; omega
  simp only [Lam.substCA_app, LamDK.ofLam, interpDKRelVal_app]
  refine iSup_congr fun c => iSup_congr fun q' =>
    iSup_congr fun p => iSup_congr fun q => ?_
  rw [ih M_1.size h_1 ? M_1 N x p rfl, ih M_2.size h_2 ? M_2 N x q rfl]
| .abs y P =>
  rw [Lam.substCA_abs]
  by_cases hyx : y = x
  * rw [if_pos hyx]

```

```

simp only [LamDK.ofLam, interpDKRelVal_abs]
have hval : lamDKVal V K (LamDK.ofLam (Lam.abs y P)) = top :=
  lamDKVal_ofLam V K hV (Lam.abs y P)
simp only [LamDK.ofLam] at hval
simp only [hval, top_inf_eq]
apply congr_arg (fun G => memB (opairB G (?D.child d)) ?Lam)
apply interpDKBodyGraph_eq_of
intro q e
cases hyx
rw [RelFun.update_overwrite]
* rw [if_neg hxP]
by_cases hxP : x notin P.fv
* rw [if_pos hxP]
  simp only [LamDK.ofLam, interpDKRelVal_abs]
  have hvalL : lamDKVal V K (LamDK.ofLam (Lam.abs y P)) = top :=
    lamDKVal_ofLam V K hV (Lam.abs y P)
  simp only [LamDK.ofLam] at hvalL
  simp only [hvalL, top_inf_eq]
  apply congr_arg (fun G => memB (opairB G (?D.child d)) ?Lam)
  apply interpDKBodyGraph_eq_of
  intro q e
  have hcomm :
    (?update hV ?total x
      (interpDKName ? V K hK hV ? (LamDK.ofLam N))).update
      hV ?total y q =
    (?update hV ?total y q).update hV ?total x
      (interpDKName ? V K hK hV ? (LamDK.ofLam N)) :=
    RelFun.update_commute ? hV ?total y x
      (interpDKName ? V K hK hV ? (LamDK.ofLam N)) q
      (hVsep y x hyx)
  rw [hcomm]
  exact (interpDKRelVal_update_fresh ? V K hK hV hVsep
    (?update hV ?total y q) P x hxP
    (interpDKName ? V K hK hV ? (LamDK.ofLam N)) e).symm
* rw [if_neg hxP]
by_cases hyN : y notin N.fv
* rw [if_pos hyN]
  simp only [LamDK.ofLam, interpDKRelVal_abs]
  have hvalL :
    lamDKVal V K (LamDK.ofLam (Lam.abs y (P.substCA x N))) = top :=
    lamDKVal_ofLam V K hV (Lam.abs y (P.substCA x N))

```

Lean 4 source (lines 1601–2000)

```

have hvalR : lamDKVal V K (LamDK.ofLam (Lam.abs y P)) = top :=
  lamDKVal_ofLam V K hV (Lam.abs y P)
simp only [LamDK.ofLam] at hvalL hvalR
simp only [hvalL, hvalR, top_inf_eq]
apply congr_arg (fun G => memB (opairB G (?D.child d)) ?Lam)
apply interpDKBodyGraph_eq_of
intro q e
have hMs : P.size < k := by
  simp [Lam.size] at hsize; omega
rw [ih P.size hMs (?update hV ?total y q) P N x e rfl]
have hname :
  (oid ?D).eq
  (interpDKName ? V K hK hV
    (?update hV ?total y q) (LamDK.ofLam N))
  (interpDKName ? V K hK hV ? (LamDK.ofLam N)) = top :=
  interpDKName_oid_eq_of_fresh ? V K hK hV hVsep ? N y hyN q
have hupd :=
  RelFun.update_eq_of_target (?update hV ?total y q)
  hV ?total x
  (interpDKName ? V K hK hV

```

```

      (? .update hV ? .total y q) (LamDK.ofLam N))
      (interpDKName ? V K hK hV ? (LamDK.ofLam N)) hname
rw [hupd, RelFun.update_commute ? hV ? .total x y q
      (interpDKName ? V K hK hV ? (LamDK.ofLam N))
      (hVsep x y (Ne.symm hxx))]
* rw [if_neg hyN]
set z := Lam.pickFresh (P.vars U N.fv U {x, y}) y
have hz : z notin P.vars U N.fv U {x, y} :=
  Lam.pickFresh_not_mem _ y
have hzP : z notin P.vars := fun h =>
  hz (Finset.mem_union.mpr (Or.inl
    (Finset.mem_union.mpr (Or.inl h))))
have hzN : z notin N.fv := fun h =>
  hz (Finset.mem_union.mpr (Or.inl
    (Finset.mem_union.mpr (Or.inr h))))
have hzx : z != x := fun h => hz (by simp [h])
have hzy : z != y := fun h => hz (by simp [h])
have hMs : P.size < k := by
  simp [Lam.size] at hsize; omega
have hren : (P.substNaive y (Lam.var z)).size = P.size :=
  Lam.size_substNaive_var P y z
simp only [LamDK.ofLam, interpDKRelVal_abs]
have hvalL :
  lamDKVal V K
  (LamDK.ofLam
    (Lam.abs z ((P.substNaive y (Lam.var z)).substCA x N))) =
  top :=
  lamDKVal_ofLam V K hV
  (Lam.abs z ((P.substNaive y (Lam.var z)).substCA x N))
have hvalR : lamDKVal V K (LamDK.ofLam (Lam.abs y P)) = top :=
  lamDKVal_ofLam V K hV (Lam.abs y P)
simp only [LamDK.ofLam] at hvalL hvalR
simp only [hvalL, hvalR, top_inf_eq]
apply congr_arg (fun G => memB (opairB G (? .D.child d)) ? .Lam)
apply interpDKBodyGraph_eq_of
intro q e
rw [ih P.size hMs (? .update hV ? .total z q)
      (P.substNaive y (Lam.var z)) N x e hren]
have hname :
  (oid ? .D).eq
  (interpDKName ? V K hK hV
    (? .update hV ? .total z q) (LamDK.ofLam N))
  (interpDKName ? V K hK hV ? (LamDK.ofLam N)) = top :=
  interpDKName_oid_eq_of_fresh ? V K hK hV hVsep ? N z hzN q
have hupd :=
  RelFun.update_eq_of_target (? .update hV ? .total z q)
  hV ? .total x
  (interpDKName ? V K hK hV
    (? .update hV ? .total z q) (LamDK.ofLam N))
  (interpDKName ? V K hK hV ? (LamDK.ofLam N)) hname
rw [hupd, RelFun.update_commute ? hV ? .total x z q
      (interpDKName ? V K hK hV ? (LamDK.ofLam N))
      (hVsep x z (Ne.symm hzx))]
have hfree : P.FreeFor y (Lam.var z) :=
  Lam.freeFor_of_not_mem_vars y hzP
have hsub :=
  interpDKRelVal_substNaive ? V K hK hV hVsep
  ((? .update hV ? .total x
    (interpDKName ? V K hK hV ? (LamDK.ofLam N))).update
    hV ? .total z q)
  P (Lam.var z) y hfree e
have hzoid :
  (oid ? .D).eq

```

```

      (interpDKName ? V K hK hV
        ((?.update hV ?.total x
          (interpDKName ? V K hK hV ?
            (LamDK.ofLam N))).update hV ?.total z q)
          (LamDK.ofLam (Lam.var z)))
      q = top := by
    rw [ <- interpDKRelVal_ofLam_eq_oid]
    simp only [LamDK.ofLam, interpDKRelVal_var, RelFun.update_self]
    exact ?.total q
  have hup :=
    RelFun.update_eq_of_target
      ((?.update hV ?.total x
        (interpDKName ? V K hK hV ?
          (LamDK.ofLam N))).update hV ?.total z q)
        hV ?.total y
        (interpDKName ? V K hK hV
          ((?.update hV ?.total x
            (interpDKName ? V K hK hV ?
              (LamDK.ofLam N))).update hV ?.total z q)
            (LamDK.ofLam (Lam.var z)))
          q hzoid
    rw [hsub, hup]
  have hzPf : z notin P.fv := fun h => hzP (Lam.fv_subset_vars P h)
  rw [RelFun.update_commute
    (?.update hV ?.total x
      (interpDKName ? V K hK hV ? (LamDK.ofLam N)))
    hV ?.total y z q q (hVsep y z (Ne.symm hzy))]
  exact interpDKRelVal_update_fresh ? V K hK hV hVsep
    ((?.update hV ?.total x
      (interpDKName ? V K hK hV ? (LamDK.ofLam N))).update
      hV ?.total y q)
    P z hzPf q e

/-!
## Body graphs of pure terms, and `LamEq` soundness
-/

theorem interpDKBodyGraph_ofLam_mem_C
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top )
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?.D))
  (x : V.idx) (M : Lam V.idx) :
  memB (interpDKBodyGraph ? V K hK hV ? x (LamDK.ofLam M)) ?.C = top := by
  apply top_unique
  have hsc :=
    interpDKBodyGraph_le_scottContinuous ? V K hK hV ? x (LamDK.ofLam M)
  rw [lamDKVal_ofLam V K hV M] at hsc
  exact hsc.trans (?.scottContinuous_le_mem_mapSpace _)

theorem memB_interpDKBodyGraph_ofLam
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top )
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?.D))
  (x : V.idx) (M : Lam V.idx) (q d : ?.D.idx) :
  memB (opairB (?.D.child q) (?.D.child d))
    (interpDKBodyGraph ? V K hK hV ? x (LamDK.ofLam M)) =
  interpDKRelVal ? V K hK hV
    (?.update hV ?.total x q) (LamDK.ofLam M) d := by
  have hP : forall z, IsRelElementAt ?.D top
    (interpDKRelVal ? V K hK hV
      (?.update hV ?.total x z) (LamDK.ofLam M)) := by

```

```

intro z
simpa [lamDKVal_ofLam V K hV M] using
  interpDKRelVal_isRelElementAt ? V K hK hV
  (? .update hV ? .total x z) (LamDK.ofLam M)
simpa using
  inf_memB_interpDKBodyGraph_eq ? V K hK hV ? x
  (LamDK.ofLam M) top hP q d

theorem InternalReflexiveModel.fun_total_child
  (? : InternalReflexiveModel (A := A)) (p : ? .D.idx) :
  ( bigcup c : ? .C.idx,
    memB (opairB (? .D.child p) (? .C.child c)) ? .Fun = top := by
  apply top_unique
  have htot := isTotalB_apply ? .Fun ? .D (? .D.child p)
  have hp : memB (? .D.child p) ? .D = top := by
    rw [ <- oid_eps ]
    exact ? .total p
  have hjoin : bigcup y : AName A, memB (opairB (? .D.child p) y) ? .Fun = top := by
    apply top_unique
    exact htot.trans' (le_inf
      (le_top.trans (isFunctionB_total ? .fun_function).ge) (le_top.trans hp.ge))
  have hsub : subsetB ? .Fun (prodB ? .D ? .C) = top :=
    isFunctionB_subset ? .fun_function
  refine (le_top.trans hjoin.ge).trans ?_
  refine iSup_le fun y =>
    memB_opairB_le_iSup_child hsub (? .D.child p) y

theorem InternalReflexiveModel.lam_total_child
  (? : InternalReflexiveModel (A := A)) (F : AName.{u} A)
  (hF : memB F ? .C = top) :
  ( bigcup p : ? .D.idx, memB (opairB F (? .D.child p)) ? .Lam = top := by
  apply top_unique
  have htot := isTotalB_apply ? .Lam ? .C F
  have hjoin : bigcup y : AName A, memB (opairB F y) ? .Lam = top := by
    apply top_unique
    exact htot.trans' (le_inf
      (le_top.trans (isFunctionB_total ? .lam_function).ge) (le_top.trans hF.ge))
  have hsub : subsetB ? .Lam (prodB ? .C ? .D) = top :=
    isFunctionB_subset ? .lam_function
  refine (le_top.trans hjoin.ge).trans ?_
  refine iSup_le fun y =>
    memB_opairB_le_iSup_child hsub F y

/-- Retract `Fun comp Lam = id` on a body graph that lands in `C`. -/
theorem InternalReflexiveModel.retract_body_eq
  (? : InternalReflexiveModel (A := A))
  (body : AName.{u} A) (c : ? .C.idx)
  (hC : memB body ? .C = top) :
  ( bigcup p : ? .D.idx,
    memB (opairB body (? .D.child p)) ? .Lam sqcap
    memB (opairB (? .D.child p) (? .C.child c)) ? .Fun) =
  eqB body (? .C.child c) := by
  have hsubLam : subsetB ? .Lam (prodB ? .C ? .D) = top :=
    isFunctionB_subset ? .lam_function
  have hsubFun : subsetB ? .Fun (prodB ? .D ? .C) = top :=
    isFunctionB_subset ? .fun_function
  have hcomp :
    memB (opairB body (? .C.child c)) (compB ? .Fun ? .Lam ? .C ? .C) =
    bigcup p : ? .D.idx,
      memB (opairB body (? .D.child p)) ? .Lam sqcap
      memB (opairB (? .D.child p) (? .C.child c)) ? .Fun :=
    memB_opairB_compB hsubLam hsubFun body (? .C.child c)
  have hid :

```



```

    memB (opairB body (?C.child c)) (compB ?Fun ?Lam ?C ?C) =
      memB (opairB body (?C.child c)) (idB ?C) :=
    eqB_top_memB_right ?retract_valid
  rw [← hcomp, hid, memB_opairB_idB, hC, top_inf_eq]

/-- Capture-avoiding b: `?(fun x. M) N?_? = ?M[x := N]?_?`. -/
theorem interpDKRelVal_sound_beta
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?D = top)
  (hV : (oid V).IsTotal)
  (hVsep : OidSeparated V)
  [DecidableEq V.idx] [Infinite V.idx]
  (? : RelFun (oid V) (oid ?D))
  (x : V.idx) (M N : Lam V.idx) (d : ?D.idx) :
  interpDKRelVal ? V K hK hV ?
    (LamDK.ofLam ((Lam.abs x M).app N)) d =
  interpDKRelVal ? V K hK hV ?
    (LamDK.ofLam (Lam.substCA M x N)) d := by
  let body := interpDKBodyGraph ? V K hK hV ? x (LamDK.ofLam M)
  have hbodyC : memB body ?C = top :=
    interpDKBodyGraph_ofLam_mem_C ? V K hK hV ? x M
  have hvalAbs : lamDKVal V K (LamDK.ofLam (Lam.abs x M)) = top :=
    lamDKVal_ofLam V K hV (Lam.abs x M)
  have hnameN :
    interpDKRelVal ? V K hK hV ? (LamDK.ofLam N)
      (interpDKName ? V K hK hV ? (LamDK.ofLam N)) = top :=
    interpDKName_spec ? V K hK hV ? (LamDK.ofLam N)
      (lamDKVal_ofLam V K hV N)
  have hsub :=
    interpDKRelVal_substCA ? V K hK hV hVsep ? M N x d
  rw [hsub]
  have hsubFun : subsetB ?Fun (prodB ?D ?C) = top :=
    isFunctionB_subset ?fun_function
  apply le_antisymm
  * simp only [LamDK.ofLam, interpDKRelVal_app, interpDKRelVal_abs]
    simp only [LamDK.ofLam] at hvalAbs
    simp only [hvalAbs, top_inf_eq]
    refine iSup_le fun c => iSup_le fun q' =>
      iSup_le fun p => iSup_le fun q => ?_
  set t :=
    memB (opairB body (?D.child p)) ?Lam sqcap
      interpDKRelVal ? V K hK hV ? (LamDK.ofLam N) q sqcap
    memB (opairB (?D.child p) (?C.child c)) ?Fun sqcap
      (oid ?D).eq q q' sqcap
    memB (?C.child c) ?C sqcap
      memB (opairB (?D.child q') (?D.child d)) (?C.child c)
  have htA : t <= memB (opairB body (?D.child p)) ?Lam :=
    inf_le_of_left_le (inf_le_of_left_le (inf_le_of_left_le
      (inf_le_of_left_le inf_le_left)))
  have htB : t <= interpDKRelVal ? V K hK hV ? (LamDK.ofLam N) q :=
    inf_le_of_left_le (inf_le_of_left_le (inf_le_of_left_le
      (inf_le_of_left_le inf_le_right)))
  have htC : t <= memB (opairB (?D.child p) (?C.child c)) ?Fun :=
    inf_le_of_left_le (inf_le_of_left_le (inf_le_of_left_le inf_le_right))
  have htD : t <= (oid ?D).eq q q' :=
    inf_le_of_left_le (inf_le_of_left_le inf_le_right)
  have htF : t <=
    memB (opairB (?D.child q') (?D.child d)) (?C.child c) :=
    inf_le_right
  have hretract : t <= eqB body (?C.child c) := by
    have hpair :
      t <=
        memB (opairB body (?D.child p)) ?Lam sqcap

```

```

      memB (opairB (?D.child p) (?C.child c)) ?Fun :=
    le_inf htA htC
  have hjoin :
    memB (opairB body (?D.child p)) ?Lam sqcap
    memB (opairB (?D.child p) (?C.child c)) ?Fun <=
      bigcup p' : ?D.idx,
      memB (opairB body (?D.child p')) ?Lam sqcap
      memB (opairB (?D.child p') (?C.child c)) ?Fun :=
    le_iSup (fun p' : ?D.idx =>
      memB (opairB body (?D.child p')) ?Lam sqcap
      memB (opairB (?D.child p') (?C.child c)) ?Fun) p
  rw [?.retract_body_eq body c hbodyC] at hjoin
  exact hpair.trans hjoin
  have hevalBody : t <=
    memB (opairB (?D.child q') (?D.child d)) body := by
  have hsubeq : eqB body (?C.child c) <=
    subsetB (?C.child c) body := by
    rw [eqB_comm, eqB_eq_subset]
    exact inf_le_left
  exact (memB_of_subsetB
    (opairB (?D.child q') (?D.child d))
    (?C.child c) body).trans' (le_inf htF (hretract.trans hsubeq))
  have hrow :
    t <= interpDKRelVal ? V K hK hV
      (?update hV ?total x q') (LamDK.ofLam M) d := by
  rw [← memB_interpDKBodyGraph_ofLam]
  exact hevalBody
  have hNq' : t <= interpDKRelVal ? V K hK hV ? (LamDK.ofLam N) q' :=
    (interpDKRelVal_isRelElementAt ? V K hK hV ? (LamDK.ofLam N)).respects
      q q' |>.trans' (le_inf htD htB)
  have hoidN : t <= (oid ?D).eq
    (interpDKName ? V K hK hV ? (LamDK.ofLam N)) q' := by
  rw [interpDKRelVal_ofLam_eq_oid] at hNq'
  exact hNq'
  have hpt :=
    interpDKRelVal_isPointwiseFamily ? V K hK hV (oid ?D)
      (fun z => ?update hV ?total x z)
      (RelFun.isPointwiseFamily_update ? hV ?total x)
      (LamDK.ofLam M) q'
      (interpDKName ? V K hK hV ? (LamDK.ofLam N)) d
  refine hpt.trans' (le_inf ?_ hrow)
  rw [(oid ?D).symm]
  exact hoidN
* simp only [LamDK.ofLam, interpDKRelVal_app, interpDKRelVal_abs]
  simp only [LamDK.ofLam] at hvalAbs
  simp only [hvalAbs, top_inf_eq]
  have hLamTot :
    (bigcup p : ?D.idx, memB (opairB body (?D.child p)) ?Lam) = top :=
    ?lam_total_child body hbodyC
  have hbodyEval :
    interpDKRelVal ? V K hK hV
      (?update hV ?total x
        (interpDKName ? V K hK hV ? (LamDK.ofLam N)))
      (LamDK.ofLam M) d =
    memB (opairB
      (?D.child (interpDKName ? V K hK hV ? (LamDK.ofLam N)))
      (?D.child d)) body :=
    (memB_interpDKBodyGraph_ofLam ? V K hK hV ? x M
      (interpDKName ? V K hK hV ? (LamDK.ofLam N)) d).symm
  rw [hbodyEval]
  conv => lhs; rw [← inf_top_eq (a :=
    memB (opairB
      (?D.child (interpDKName ? V K hK hV ? (LamDK.ofLam N)))

```

```

    (?D.child d)) body]]
rw [ <- hLamTot, inf_iSup_eq]
refine iSup_le fun p => ?_
have hFunTot := ?.fun_total_child p
refine (le_inf le_rfl (le_top.trans hFunTot.ge)).trans ?_
rw [inf_iSup_eq]
refine iSup_le fun c => ?_
refine le_iSup_of_le c (le_iSup_of_le
  (interpDKName ? V K hK hV ? (LamDK.ofLam N))
  (le_iSup_of_le p (le_iSup_of_le
    (interpDKName ? V K hK hV ? (LamDK.ofLam N)) ?_)))
have hretract :
  memB (opairB body (?D.child p)) ?Lam sqcap
  memB (opairB (?D.child p) (?C.child c)) ?Fun <=
  eqB body (?C.child c) := by
  have hjoin := le_iSup (fun p' : ?D.idx =>
    memB (opairB body (?D.child p')) ?Lam sqcap
    memB (opairB (?D.child p') (?C.child c)) ?Fun) p
  rw [?.retract_body_eq body c hbodyC] at hjoin
  exact hjoin
have hFunC :
  memB (opairB (?D.child p) (?C.child c)) ?Fun <=
  memB (?C.child c) ?C :=
  (memB_opairB_le_of_subsetB hsubFun (?D.child p) (?C.child c)).trans
  inf_le_right
have hevalC :
  memB (opairB
    (?D.child (interpDKName ? V K hK hV ? (LamDK.ofLam N)))
    (?D.child d)) body sqcap
  memB (opairB body (?D.child p)) ?Lam sqcap
  memB (opairB (?D.child p) (?C.child c)) ?Fun <=
  memB (opairB
    (?D.child (interpDKName ? V K hK hV ? (LamDK.ofLam N)))
    (?D.child d)) (?C.child c) := by
  have hsubeq : eqB body (?C.child c) <= subsetB body (?C.child c) := by
  rw [eqB_eq_subset]
  exact inf_le_left
refine (memB_of_subsetB
  (opairB
    (?D.child (interpDKName ? V K hK hV ? (LamDK.ofLam N)))
    (?D.child d))
  body (?C.child c)).trans' ?_
have hLF :
  memB (opairB
    (?D.child (interpDKName ? V K hK hV ? (LamDK.ofLam N)))
    (?D.child d)) body sqcap
  memB (opairB body (?D.child p)) ?Lam sqcap
  memB (opairB (?D.child p) (?C.child c)) ?Fun <=
  memB (opairB body (?D.child p)) ?Lam sqcap
  memB (opairB (?D.child p) (?C.child c)) ?Fun :=
  le_inf (inf_le_of_left_le inf_le_right) inf_le_right
refine le_inf (inf_le_of_left_le inf_le_left)
  ((hLF.trans hretract).trans hsubeq)
have hxx : (oid ?D).eq
  (interpDKName ? V K hK hV ? (LamDK.ofLam N))
  (interpDKName ? V K hK hV ? (LamDK.ofLam N)) = top :=
  ?.total _
refine le_inf (le_inf (le_inf (le_inf (le_inf ?_ ?_) ?_) ?_) ?_) ?_
* exact inf_le_of_left_le inf_le_right
* exact le_top.trans hnameN.ge
* exact inf_le_right
* exact le_top.trans hxx.ge
* exact inf_le_right.trans hFunC

```

* exact hevalC

Lean 4 source (lines 2001–2143)

```

/-- a-soundness: `?fun x. M?_? = ?fun y. M[x := y]?_?` when `y notin fv(M)` -/
theorem interpDKRelVal_sound_alpha
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top)
  (hV : (oid V).IsTotal)
  (hVsep : OidSeparated V)
  [DecidableEq V.idx] [Infinite V.idx]
  (? : RelFun (oid V) (oid ?.D))
  (x y : V.idx) (M : Lam V.idx) (hy : y notin M.fv) (d : ?.D.idx) :
  interpDKRelVal ? V K hK hV ? (LamDK.ofLam (Lam.abs x M)) d =
    interpDKRelVal ? V K hK hV ?
      (LamDK.ofLam (Lam.abs y (Lam.substCA M x (Lam.var y)))) d := by
  simp only [LamDK.ofLam, interpDKRelVal_abs]
  have hvalL : lamDKVal V K (LamDK.ofLam (Lam.abs x M)) = top :=
    lamDKVal_ofLam V K hV (Lam.abs x M)
  have hvalR :
    lamDKVal V K
      (LamDK.ofLam (Lam.abs y (Lam.substCA M x (Lam.var y)))) = top :=
    lamDKVal_ofLam V K hV (Lam.abs y (Lam.substCA M x (Lam.var y)))
  simp only [LamDK.ofLam] at hvalL hvalR
  simp only [hvalL, hvalR, top_inf_eq]
  apply congr_arg (fun G => memB (opairB G (?.D.child d)) ?.Lam)
  apply interpDKBodyGraph_eq_of
  intro q e
  rw [interpDKRelVal_substCA ? V K hK hV hVsep
    (??.update hV ?.total y q) M (Lam.var y) x e]
  have hzoid :
    (oid ?.D).eq
      (interpDKName ? V K hK hV (??.update hV ?.total y q)
        (LamDK.ofLam (Lam.var y))) q = top := by
  rw [← interpDKRelVal_ofLam_eq_oid]
  simp only [LamDK.ofLam, interpDKRelVal_var, RelFun.update_self]
  exact ?.total q
  have hup :=
    RelFun.update_eq_of_target (??.update hV ?.total y q)
      hV ?.total x
      (interpDKName ? V K hK hV (??.update hV ?.total y q)
        (LamDK.ofLam (Lam.var y)))
      q hzoid
  rw [hup]
  by_cases hyx : y = x
  * cases hyx
    rw [RelFun.update_overwrite]
  * rw [← RelFun.update_commute ? hV ?.total y x q q (hVsep y x hyx)]
  exact (interpDKRelVal_update_fresh ? V K hK hV hVsep
    (??.update hV ?.total x q) M y hy q e).symm

/-- Internal [4, Theorem 5.4.4]: `LamEq` is sound for Definition 25. -/
theorem interpDKRelVal_sound_ofLam
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top)
  (hV : (oid V).IsTotal)
  (hVsep : OidSeparated V)
  [DecidableEq V.idx] [Infinite V.idx]
  (? : RelFun (oid V) (oid ?.D))
  {M N : Lam V.idx} (h : LamEq M N) (d : ?.D.idx) :
  interpDKRelVal ? V K hK hV ? (LamDK.ofLam M) d =
    interpDKRelVal ? V K hK hV ? (LamDK.ofLam N) d := by
  induction h generalizing ? d with
  | refl M =>

```

```

    rfl
| symm _ ih =>
  exact (ih ? d).symm
| trans _ _ ih1 ih2 =>
  exact (ih1 ? d).trans (ih2 ? d)
| app_left _ ih =>
  simp only [LamDK.ofLam, interpDKRelVal_app]
  refine iSup_congr fun c => iSup_congr fun q' =>
    iSup_congr fun p => iSup_congr fun q => ?_
  rw [ih ? p]
| app_right _ ih =>
  simp only [LamDK.ofLam, interpDKRelVal_app]
  refine iSup_congr fun c => iSup_congr fun q' =>
    iSup_congr fun p => iSup_congr fun q => ?_
  rw [ih ? q]
| @xi z P Q hPQ ih =>
  simp only [LamDK.ofLam, interpDKRelVal_abs]
  have hvalL : lamDKVal V K (LamDK.ofLam (Lam.abs z P)) = top :=
    lamDKVal_ofLam V K hV (Lam.abs z P)
  have hvalR : lamDKVal V K (LamDK.ofLam (Lam.abs z Q)) = top :=
    lamDKVal_ofLam V K hV (Lam.abs z Q)
  simp only [LamDK.ofLam] at hvalL hvalR
  simp only [hvalL, hvalR, top_inf_eq]
  apply congr_arg (fun G => memB (opairB G (?D.child d)) ?Lam)
  apply interpDKBodyGraph_eq_of
  intro q e
  exact ih (?update hV ?.total z q) e
| beta z P Q =>
  exact interpDKRelVal_sound_beta ? V K hK hV hVsep ? z P Q d
| alpha z w P hy =>
  exact interpDKRelVal_sound_alpha ? V K hK hV hVsep ? z w P hy d

/-- The two internal `D`-names of `fun`-equal pure terms are Boolean-equal. -/
theorem theorem26Pure_sound
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top)
  (hV : (oid V).IsTotal)
  (hVsep : OidSeparated V)
  [DecidableEq V.idx] [Infinite V.idx]
  (? : RelFun (oid V) (oid ?.D))
  {M N : Lam V.idx} (h : LamEq M N) (d : ?.D.idx) :
  interpDKRelVal ? V K hK hV ? (LamDK.ofLam M) d =
    interpDKRelVal ? V K hK hV ? (LamDK.ofLam N) d :=
  interpDKRelVal_sound_ofLam ? V K hK hV hVsep ? h d

theorem theorem26Pure_sound_eqB
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top)
  (hV : (oid V).IsTotal)
  (hVsep : OidSeparated V)
  [DecidableEq V.idx] [Infinite V.idx]
  (? : RelFun (oid V) (oid ?.D))
  {M N : Lam V.idx} (h : LamEq M N) :
  eqB
    (?D.child (interpDKName ? V K hK hV ? (LamDK.ofLam M)))
    (?D.child (interpDKName ? V K hK hV ? (LamDK.ofLam N))) = top := by
  have hoid :
    (oid ?.D).eq
      (interpDKName ? V K hK hV ? (LamDK.ofLam M))
      (interpDKName ? V K hK hV ? (LamDK.ofLam N)) = top := by
  rw [← interpDKRelVal_ofLam_eq_oid]
  rw [theorem26Pure_sound ? V K hK hV hVsep ? h]
  exact interpDKName_spec ? V K hK hV ? (LamDK.ofLam N)

```

```

      (lamDKVal_ofLam V K hV N)
    rwa [ <- oid_eq_of_total ?.D ?.total]

/-- Ground `LamEq` lands in `lamEqB`, so Example 24 applies to checked
equations. Soundness itself is `theorem26Pure_sound`. -/
theorem theorem26Pure_sound_encodeEq
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top )
  (hV : (oid V).IsTotal)
  (hVsep : OidSeparated V)
  [DecidableEq V.idx] [Infinite V.idx]
  (? : RelFun (oid V) (oid ?.D))
  {M N : Lam V.idx} (h : LamEq M N) :
  memB (encodeEqB V M N) (lamEqB V) = top /\
    (forall d, interpDKRelVal ? V K hK hV ? (LamDK.ofLam M) d =
      interpDKRelVal ? V K hK hV ? (LamDK.ofLam N) d) :=
  <memB_encodeEqB V M N h,
    fun d => theorem26Pure_sound ? V K hK hV hVsep ? h d>

end Scott2026

```

A.31 Scott2026/Theorem26.lean

246 lines.

Lean 4 source

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/

import Scott2026.InterpConstVA
import Scott2026.InternalEvalPack
import Scott2026.OidEssential

/-!
# Theorem 26: internal interpretation

The Definition 25 evaluator name is assembled in `InternalEvalPack` and
shown to be an internal function `lamDKB D V K -> D`. The four clauses
are `interpDKGraph_var/const/app/abs` (and their `_val` unfoldings) at
the term's `lamDKVal` extent. Definition 16 and completeness give the
`SetoidF_A` morphisms `theorem26Full` / `theorem26Pure`. Checked
pure-term soundness is `theorem26Pure_sound`: `LamEq M N` implies
Boolean equality of the internal interpretations, using the substitution
lemma, the retract `Fun comp Lam = id` on `C`, and `OidSeparated` for
crisp variables. Engeler `theorem_26` / `theorem_26_sound_full` remain
the weaker carrier packaging and are not renamed.
-/

universe u

namespace Scott2026

open AName

variable {A : Type u} [CompleteBooleanAlgebra A]

/-- Turn an internal function-name witness into its `SetoidF_A` map. This is
Definition 16 followed by Definition 13, exactly as in the proof of
Theorem 26. -/

```

```

noncomputable def functionNameToSetoidFHom
  (X D I : AName.{u} A)
  (hI : isFunctionB I X D = top )
  (hD : (oid D).IsComplete.{u}) :
  SetoidFHom (oid X) (oid D) :=
  SetoidFHom.ofRelFun hD (oidRel X D I hI)

/-- Full constant-bearing interpretation, conditional only on the internal
recursion's function-name witness. -/
noncomputable def theorem26FullOfFunctionName
  (D V K I : AName.{u} A)
  (hI : isFunctionB I (lamDKB D V K) D = top )
  (hD : (oid D).IsComplete.{u}) :
  SetoidFHom (oid (lamDKB D V K)) (oid D) :=
  functionNameToSetoidFHom (lamDKB D V K) D I hI hD

/-- Pure interpretation, conditional only on its internal function-name
witness. -/
noncomputable def theorem26PureOfFunctionName
  (D V I : AName.{u} A)
  (hI : isFunctionB I (lamB V) D = top )
  (hD : (oid D).IsComplete.{u}) :
  SetoidFHom (oid (lamB V)) (oid D) :=
  functionNameToSetoidFHom (lamB V) D I hI hD

/-- Evaluation of the resulting functional representative has exactly the
same Boolean graph as the original internal interpretation name. -/
theorem theorem26FullOfFunctionName_gamma
  (D V K I : AName.{u} A)
  (hI : isFunctionB I (lamDKB D V K) D = top )
  (hD : (oid D).IsComplete.{u})
  (M : (lamDKB D V K).idx) (d : D.idx) :
  gamma (oid (lamDKB D V K)) (oid D)
    (functionalOfRel hD
      (oidRel (lamDKB D V K) D I hI)) M d =
  memB (opairB ((lamDKB D V K).child M) (D.child d)) I := by
  rw [functionalOfRel_gamma]
  rfl

/-- Pure counterpart of `theorem26FullOfFunctionName_gamma`. -/
theorem theorem26PureOfFunctionName_gamma
  (D V I : AName.{u} A)
  (hI : isFunctionB I (lamB V) D = top )
  (hD : (oid D).IsComplete.{u})
  (M : (lamB V).idx) (d : D.idx) :
  gamma (oid (lamB V)) (oid D)
    (functionalOfRel hD (oidRel (lamB V) D I hI)) M d =
  memB (opairB ((lamB V).child M) (D.child d)) I := by
  rw [functionalOfRel_gamma]
  rfl

/-- Exact internal Theorem 26, full constant-bearing fragment. -/
noncomputable def theorem26Full
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top )
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?.D)) :
  SetoidFHom (oid (lamDKB ?.D V K)) (oid ?.D) :=
  theorem26FullOfFunctionName ?.D V K
  (InternalReflexiveModel.interpDKGraph ? V K hK hV ?)
  (InternalReflexiveModel.interpDKGraph_isFunctionB ? V K hK hV ?)
  ?.complete

```

```

/-- Paper-facing entry: any valid internal valuation totalizes to a
`SetoidF_A` interpretation of `lamDKB`. -/
noncomputable def theorem26Full_of_valuation
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top )
  (hV : (oid V).IsTotal)
  (Dom Rho : AName.{u} A)
  (hVal : isValuationB V ?.D Dom Rho = top ) :
  SetoidFHom (oid (lamDKB ?.D V K)) (oid ?.D) :=
theorem26Full ? V K hK hV
  (totalizedValuationRelOfValid V ?.D Dom Rho hVal
   ?.total ?.complete)

/-- Exact internal Theorem 26, pure-term fragment. -/
noncomputable def theorem26Pure
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top )
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?.D)) :
  SetoidFHom (oid (lamB V)) (oid ?.D) :=
theorem26PureOfFunctionName ?.D V
  (InternalReflexiveModel.interpDKPureGraph ? V K hK hV ?)
  (InternalReflexiveModel.interpDKPureGraph_isFunctionB ? V K hK hV ?)
  ?.complete

/-- Paper-facing pure entry from a valid internal valuation. -/
noncomputable def theorem26Pure_of_valuation
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top )
  (hV : (oid V).IsTotal)
  (Dom Rho : AName.{u} A)
  (hVal : isValuationB V ?.D Dom Rho = top ) :
  SetoidFHom (oid (lamB V)) (oid ?.D) :=
theorem26Pure ? V K hK hV
  (totalizedValuationRelOfValid V ?.D Dom Rho hVal
   ?.total ?.complete)

/-- `SetoidF_A` evaluation of `theorem26Full` recovers the evaluator graph. -/
theorem theorem26Full_gamma
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top )
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?.D))
  (M : (lamDKB ?.D V K).idx) (d : ?.D.idx) :
  gamma (oid (lamDKB ?.D V K)) (oid ?.D)
  (functionalOfRel ?.complete
   (oidRel (lamDKB ?.D V K) ?.D
    (InternalReflexiveModel.interpDKGraph ? V K hK hV ?)
    (InternalReflexiveModel.interpDKGraph_isFunctionB
     ? V K hK hV ?))) M d =
  memB (opairB ((lamDKB ?.D V K).child M) (?.D.child d))
  (InternalReflexiveModel.interpDKGraph ? V K hK hV ?) :=
theorem26FullOfFunctionName_gamma ?.D V K
  (InternalReflexiveModel.interpDKGraph ? V K hK hV ?)
  (InternalReflexiveModel.interpDKGraph_isFunctionB ? V K hK hV ?)
  ?.complete M d

/-- Definition 25 at a `lamDKB` index, via the `SetoidF_A` representative. -/
theorem theorem26Full_eval
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top )
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?.D))

```



```

(M : (lamDKB ?.D V K).idx) (d : ?.D.idx) :
lamDKVal V K (asLamDK ?.D V K M) sqcap
  gamma (oid (lamDKB ?.D V K)) (oid ?.D)
    (functionalOfRel ?.complete
      (oidRel (lamDKB ?.D V K) ?.D
        (InternalReflexiveModel.interpDKGraph ? V K hK hV ?)
        (InternalReflexiveModel.interpDKGraph_isFunctionB
          ? V K hK hV ?))) M d =
  interpDKRelVal ? V K hK hV ? (asLamDK ?.D V K M) d := by
rw [theorem26Full_gamma, <- asLamDK_encode]
exact InternalReflexiveModel.interpDKGraph_eval ? V K hK hV ?
  (asLamDK ?.D V K M) d

theorem theorem26Full_var
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top )
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?.D))
  (x : V.idx) (d : ?.D.idx) :
lamDKVal V K (.var x) sqcap
  memB (opairB (encodeLamDKB V K (.var x)) (?.D.child d))
    (InternalReflexiveModel.interpDKGraph ? V K hK hV ?) =
  ?.val x d :=
InternalReflexiveModel.interpDKGraph_var_val ? V K hK hV ? x d

theorem theorem26Full_const
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top )
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?.D))
  (k : K.idx) (d : ?.D.idx) :
lamDKVal V K (.const k) sqcap
  memB (opairB (encodeLamDKB V K (.const k)) (?.D.child d))
    (InternalReflexiveModel.interpDKGraph ? V K hK hV ?) =
  (oidSubsetRel K ?.D hK).val k d :=
InternalReflexiveModel.interpDKGraph_const_val ? V K hK hV ? k d

theorem theorem26Full_app
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top )
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?.D))
  (P Q : LamDK V.idx K.idx) (d : ?.D.idx) :
lamDKVal V K (.app P Q) sqcap
  memB (opairB (encodeLamDKB V K (.app P Q)) (?.D.child d))
    (InternalReflexiveModel.interpDKGraph ? V K hK hV ?) =
  interpDKRelVal ? V K hK hV ? (.app P Q) d :=
InternalReflexiveModel.interpDKGraph_app ? V K hK hV ? P Q d

theorem theorem26Full_abs
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top )
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?.D))
  (x : V.idx) (P : LamDK V.idx K.idx) (d : ?.D.idx) :
lamDKVal V K (.abs x P) sqcap
  memB (opairB (encodeLamDKB V K (.abs x P)) (?.D.child d))
    (InternalReflexiveModel.interpDKGraph ? V K hK hV ?) =
  lamDKVal V K (.abs x P) sqcap
  memB (opairB (interpDKBodyGraph ? V K hK hV ? x P)
    (?.D.child d)) ?.Lam :=
InternalReflexiveModel.interpDKGraph_abs_val ? V K hK hV ? x P d

```

```

/-- `SetoidF_A` evaluation of `theorem26Pure` recovers the pure graph. -/
theorem theorem26Pure_gamma
  (? : InternalReflexiveModel (A := A))
  (V K : AName.{u} A) (hK : subsetB K ?.D = top )
  (hV : (oid V).IsTotal)
  (? : RelFun (oid V) (oid ?.D))
  (M : (lamB V).idx) (d : ?.D.idx) :
  gamma (oid (lamB V)) (oid ?.D)
    (functionalOfRel ?.complete
      (oidRel (lamB V) ?.D
        (InternalReflexiveModel.interpDKPureGraph ? V K hK hV ?)
        (InternalReflexiveModel.interpDKPureGraph_isFunctionB
          ? V K hK hV ?))) M d =
  memB (opairB ((lamB V).child M) (?.D.child d))
    (InternalReflexiveModel.interpDKPureGraph ? V K hK hV ?) :=
theorem26PureOfFunctionName_gamma ?.D V
  (InternalReflexiveModel.interpDKPureGraph ? V K hK hV ?)
  (InternalReflexiveModel.interpDKPureGraph_isFunctionB ? V K hK hV ?)
  ?.complete M d

end Scott2026

```

A.32 Scott2026/Theorem30Internal.lean

4452 lines.

Lean 4 source (lines 1–400)

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/

import Scott2026.EngelerVA
import Scott2026.ReflexiveVA
import Scott2026.ExtensionalVA
import Scott2026.InternalDomain
import Scott2026.InternalEvalComplete

/-!
# Internal Theorem 30: Definition 19 for the Engeler model in `V^A`

Paper Theorem 30: `(P^A(check E), subseq , *, lam)` is a reflexive dcpo in `V^A`.
The exact Lean form is `isReflexiveDcpoB ... = top` (Definition 19). The existing
`theorem_30` / `engelerVA` package remains the weaker external/canonical-carrier
statement.
-/

universe u

namespace Scott2026

open AName

variable {A : Type u} [CompleteBooleanAlgebra A]

/-!
## Carrier `D`
-/

/-- Extensional Engeler carrier `P^A(checkExt ?)`. Boolean-equal to
`P^A(check ?)` by `eqB_check_checkExt` / `eqB_powerB_congr`. -/

```

```

noncomputable def engelerD : AName.{u} A :=
  powerB (checkExt (A := A) PSet.omega)

theorem eqB_engelerD_powerB_check [Nontrivial A] :
  eqB (engelerD (A := A)) (powerB (check (A := A) PSet.omega)) = top := by
  unfold engelerD
  rw [eqB_comm]
  exact eqB_powerB_congr (eqB_check_checkExt (A := A) PSet.omega)

theorem oid_engelerD_isTotal :
  (oid (engelerD (A := A))).IsTotal :=
  oid_powerB_isTotal _

theorem oid_engelerD_isComplete :
  (oid (engelerD (A := A))).IsComplete :=
  oid_powerB_isComplete _

theorem oid_engelerD_isStrict [Nontrivial A] :
  (oid (engelerD (A := A))).IsStrict :=
  oid_powerB_checkExt_isStrict PSet.omega

/-!
## Subset-order relation `R`
-/

/-- Boolean inclusion is congruent in both arguments. -/
theorem subsetB_congr (x x' y y' : AName.{u} A) :
  eqB x x' sqcap eqB y y' sqcap subsetB x y <= subsetB x' y' := by
  have hleft : eqB x x' sqcap subsetB x y <= subsetB x' y :=
    (AName.subsetB_trans x' x y).trans' <|
    le_inf
    ((eqB_le_subsetB x' x).trans' <| by
      rw [eqB_comm (x := x) (y := x')]
      exact inf_le_left)
    inf_le_right
  have hright : eqB y y' sqcap subsetB x' y <= subsetB x' y' :=
    (AName.subsetB_trans x' y y').trans' <|
    le_inf inf_le_right ((eqB_le_subsetB y y').trans' inf_le_left)
  exact hright.trans' <|
    le_inf (inf_le_of_left_le inf_le_right)
    (hleft.trans' (le_inf (inf_le_of_left_le inf_le_left) inf_le_right))

/-- Characteristic predicate of a pair related by `subseq` -/
noncomputable def subsetPairPred (p : AName.{u} A) : A :=
  bigcup x : AName.{u} A, bigcup y : AName.{u} A,
  eqB p (opairB x y) sqcap subsetB x y

theorem subsetPairPred_congr (p p' : AName.{u} A) :
  eqB p p' sqcap subsetPairPred p <= subsetPairPred p' := by
  unfold subsetPairPred
  rw [inf_iSup_eq]
  refine iSup_le fun x => ?_
  rw [inf_iSup_eq]
  refine iSup_le fun y => le_iSup_of_le x (le_iSup_of_le y ?_)
  have htrans : eqB p p' sqcap eqB p (opairB x y) <= eqB p' (opairB x y) := by
    rw [eqB_comm (x := p) (y := p')]
    exact eqB_trans p' p (opairB x y)
  exact le_inf
    (htrans.trans' (le_inf inf_le_left (inf_le_of_right_le inf_le_left)))
    (inf_le_of_right_le inf_le_right)

theorem subsetPairPred_opairB (x y : AName.{u} A) :
  subsetPairPred (opairB x y) = subsetB x y := by

```

```

unfold subsetPairPred
refine le_antisymm ?le ?ge
* refine iSup_le fun x' => iSup_le fun y' => ?_
  rw [eqB_opairB]
  exact (subsetB_congr x' x y' y).trans' <| by
    rw [eqB_comm (x := x) (y := x'), eqB_comm (x := y) (y := y')]
* exact le_iSup_of_le x (le_iSup_of_le y
  (le_inf (le_top.trans (eqB_self (A := A) (opairB x y)).ge) le_refl))

/-- The subset-order relation on an internal set `D`: pairs `(x,y)` with
`x,y` in `D` and `x` subseq `y`. -/
noncomputable def subsetOrderRelB (D : AName.{u} A) : AName.{u} A :=
  sepB (prodB D D) subsetPairPred

/-- Separation lands in the ambient name. -/
theorem subsetB_sepB (X : AName.{u} A) (phi : AName.{u} A -> A) :
  subsetB (sepB X phi) X = top := by
  rw [sepB, subsetB_mk]
  refine iInf_eq_top.mpr fun i => himp_eq_top_iff.mpr ?_
  exact inf_le_left.trans (val_le_memB X i)

theorem relB_subsetOrderRelB (D x y : AName.{u} A) :
  relB (subsetOrderRelB D) x y = memB x D sqcap memB y D sqcap subsetB x y := by
  unfold relB subsetOrderRelB
  rw [memB_sepB (opairB x y) (prodB D D) subsetPairPred subsetPairPred_congr,
    memB_opairB_prodB, subsetPairPred_opairB]

/-- The subset order on the Engeler carrier. -/
noncomputable def engelerR : AName.{u} A :=
  subsetOrderRelB (engelerD (A := A))

theorem relB_engelerR (x y : AName.{u} A) :
  relB (engelerR (A := A)) x y =
    memB x (engelerD (A := A)) sqcap memB y (engelerD (A := A)) sqcap subsetB x y :=
  relB_subsetOrderRelB _ x y

/-!
## Partial order and dcpo
-/

theorem isPartialOrderB_subsetOrderRelB (D : AName.{u} A) :
  isPartialOrderB D (subsetOrderRelB D) = top := by
  unfold isPartialOrderB
  refine inf_eq_top_iff.mpr <inf_eq_top_iff.mpr <inf_eq_top_iff.mpr <?hsub, ?hrefl>, ?hanti>, ?
    htrans>
  * exact subsetB_sepB (prodB D D) subsetPairPred
  * refine iInf_eq_top.mpr fun x => himp_eq_top_iff.mpr ?_
    rw [relB_subsetOrderRelB]
    exact le_inf (le_inf le_refl le_refl) (le_top.trans (subsetB_refl x).ge)
  * refine iInf_eq_top.mpr fun x => iInf_eq_top.mpr fun y => himp_eq_top_iff.mpr ?_
    rw [relB_subsetOrderRelB, relB_subsetOrderRelB, eqB_eq_subset]
    let t :=
      memB x D sqcap memB y D sqcap
      (memB x D sqcap memB y D sqcap subsetB x y) sqcap
      (memB y D sqcap memB x D sqcap subsetB y x)
    change t <= subsetB x y sqcap subsetB y x
    refine le_inf ?xy ?yx
  * dsimp [t]
    exact inf_le_left.trans (inf_le_right.trans inf_le_right)
  * dsimp [t]
    exact inf_le_right.trans inf_le_right
  * refine iInf_eq_top.mpr fun x => iInf_eq_top.mpr fun y =>
    iInf_eq_top.mpr fun z => himp_eq_top_iff.mpr ?_

```

```

rw [relB_subsetOrderRelB, relB_subsetOrderRelB, relB_subsetOrderRelB]
let t :=
  (memB x D sqcap memB y D sqcap subsetB x y) sqcap
  (memB y D sqcap memB z D sqcap subsetB y z)
change t <= memB x D sqcap memB z D sqcap subsetB x z
refine le_inf (le_inf ?hxD ?hzD) ?hxz
* dsimp [t]; exact inf_le_left.trans (inf_le_left.trans inf_le_left)
* dsimp [t]; exact inf_le_right.trans (inf_le_left.trans inf_le_right)
* exact (AName.subsetB_trans x y z).trans' <| by
  dsimp [t]
  exact le_inf (inf_le_left.trans inf_le_right)
    (inf_le_right.trans inf_le_right)

theorem subsetB_le_memB_of_mem (S D x : AName.{u} A) :
  subsetB S D sqcap memB x S <= memB x D :=
  (memB_of_subsetB x S D).trans' (le_inf inf_le_right inf_le_left)

theorem isDirectedRelB_le_subsetB (S D R : AName.{u} A) :
  isDirectedRelB S D R <= subsetB S D := by
  unfold isDirectedRelB
  exact inf_le_of_left_le inf_le_left

theorem isDirectedRelB_le_nonempty (S D R : AName.{u} A) :
  isDirectedRelB S D R <= bigcup x : AName.{u} A, memB x S := by
  unfold isDirectedRelB
  exact inf_le_of_left_le inf_le_right

theorem isUpperBoundRelB_subsetOrderRelB (x S D : AName.{u} A) :
  isUpperBoundRelB x S (subsetOrderRelB D) =
  ? y : AName.{u} A, memB y S ? memB y D sqcap memB x D sqcap subsetB y x := by
  unfold isUpperBoundRelB
  refine iInf_congr fun y => ?_
  rw [relB_subsetOrderRelB]

theorem isUpperBoundRelB_le_isUpperBoundSubsetB
  (x S D : AName.{u} A) :
  isUpperBoundRelB x S (subsetOrderRelB D) <= isUpperBoundSubsetB x S := by
  unfold isUpperBoundSubsetB isUpperBoundRelB
  refine iInf_mono fun y => ?_
  have hle : relB (subsetOrderRelB D) y x <= subsetB y x := by
    rw [relB_subsetOrderRelB]
    exact inf_le_right
  exact himp_le_himp le_rfl hle

theorem le_isUpperBoundRelB_of_subset
  (x S D : AName.{u} A) :
  memB x D sqcap subsetB S D sqcap isUpperBoundSubsetB x S <=
  isUpperBoundRelB x S (subsetOrderRelB D) := by
  rw [isUpperBoundRelB_subsetOrderRelB]
  refine le_iInf fun y => ?_
  rw [le_himp_iff]
  let t := memB x D sqcap subsetB S D sqcap isUpperBoundSubsetB x S sqcap memB y S
  change t <= memB y D sqcap memB x D sqcap subsetB y x
  refine le_inf (le_inf ?hyD ?hxD) ?hsubxy
  * exact (subsetB_le_memB_of_mem S D y).trans' <| by
    dsimp [t]
    exact le_inf (inf_le_left.trans (inf_le_left.trans inf_le_right))
      inf_le_right
  * dsimp [t]; exact inf_le_left.trans (inf_le_left.trans inf_le_left)
  * exact (isUpperBoundSubsetB_apply x S y).trans' <| by
    dsimp [t]
    exact le_inf (inf_le_left.trans inf_le_right) inf_le_right

```

```

/-- A nonempty family forces an `R`-upper bound into `D`. -/
theorem isUpperBoundRelB_le_memB
  (x S D : AName.{u} A) :
  ( bigcup y : AName.{u} A, memB y S) sqcap
    isUpperBoundRelB x S (subsetOrderRelB D) <=
      memB x D := by
  rw [iSup_inf_eq]
  refine iSup_le fun y => ?_
  have hrel : memB y S sqcap isUpperBoundRelB x S (subsetOrderRelB D) <=
    relB (subsetOrderRelB D) y x := by
    rw [inf_comm]
    exact isUpperBoundRelB_apply x S (subsetOrderRelB D) y
  refine hrel.trans ?_
  rw [relB_subsetOrderRelB]
  exact inf_le_left.trans inf_le_right

theorem isSupRelB_sUnionB_powerB (S X : AName.{u} A) :
  subsetB S (powerB X) sqcap ( bigcup y : AName.{u} A, memB y S) <=
    memB (sUnionB S) (powerB X) sqcap
      isSupRelB (sUnionB S) S (subsetOrderRelB (powerB X)) := by
  have hmem : subsetB S (powerB X) <= memB (sUnionB S) (powerB X) :=
    memB_sUnionB_powerB S X
  have hup : subsetB S (powerB X) <=
    isUpperBoundRelB (sUnionB S) S (subsetOrderRelB (powerB X)) :=
    (le_isUpperBoundRelB_of_subset (sUnionB S) S (powerB X)).trans' <|
      le_inf (le_inf hmem le_rfl)
      (le_top.trans (isUpperBoundSubsetB_sUnionB S).ge)
  unfold isSupRelB
  refine le_inf (hmem.trans' inf_le_left) ?hsuprel
  refine le_inf (hup.trans' inf_le_left) ?least
  refine le_iInf fun y => ?_
  rw [le_himp_iff]
  let t :=
    subsetB S (powerB X) sqcap ( bigcup z : AName.{u} A, memB z S) sqcap
      isUpperBoundRelB y S (subsetOrderRelB (powerB X))
  change t <= relB (subsetOrderRelB (powerB X)) (sUnionB S) y
  have hyD : t <= memB y (powerB X) :=
    (isUpperBoundRelB_le_memB y S (powerB X)).trans' <| by
      dsimp [t]
      exact le_inf (inf_le_left.trans inf_le_right) inf_le_right
  have hsub : t <= subsetB (sUnionB S) y :=
    (subsetB_sUnionB_of_upperBound S y).trans' <|
      (isUpperBoundRelB_le_isUpperBoundSubsetB y S (powerB X)).trans' inf_le_right
  rw [relB_subsetOrderRelB]
  refine le_inf (le_inf ((hmem.trans' (inf_le_left.trans inf_le_left))) hyD) hsub

theorem isDcpoWithBottomB_powerB_subset (X : AName.{u} A) :
  isDcpoWithBottomB (powerB X) (subsetOrderRelB (powerB X)) = top := by
  unfold isDcpoWithBottomB
  refine inf_eq_top_iff.mpr <inf_eq_top_iff.mpr <?po, ?bot>, ?dir>
  * exact isPartialOrderB_subsetOrderRelB (powerB X)
  * refine top_unique
    (le_iSup_of_le (check (A := A) ({ } : PSet.{u})) ?_)
  have hmem :
    memB (check (A := A) ({ } : PSet.{u})) (powerB X) = top := by
    rw [memB_powerB]
    exact subsetB_check_empty X
  refine le_inf (le_of_eq hmem.symm) ?_
  refine le_of_eq ((iInf_eq_top (s := fun x : AName.{u} A =>
    memB x (powerB X) ?
    relB (subsetOrderRelB (powerB X))
    (check (A := A) ({ } : PSet.{u})) x)).mpr fun x => ?_).symm
  refine (himp_eq_top_iff

```

```

      (a := memB x (powerB X))
      (b := relB (subsetOrderRelB (powerB X))
        (check (A := A) ({ : PSet.{u}}) x)).mpr ?_
    rw [relB_subsetOrderRelB, hmem, subsetB_check_empty (A := A) x,
      top_inf_eq, inf_top_eq]
  * refine iInf_eq_top.mpr fun S => himp_eq_top_iff.mpr ?_
  refine le_iSup_of_le (sUnionB S) ?_
  exact (isSupRelB_sUnionB_powerB S X).trans' <|
    le_inf
      (isDirectedRelB_le_subsetB S (powerB X) (subsetOrderRelB (powerB X)))
      (isDirectedRelB_le_nonempty S (powerB X) (subsetOrderRelB (powerB X)))

theorem engelerR_isPartialOrderB :
  isPartialOrderB (engelerD (A := A)) (engelerR (A := A)) = top :=
  isPartialOrderB_subsetOrderRelB _

theorem engelerR_isDcpoWithBottomB :
  isDcpoWithBottomB (engelerD (A := A)) (engelerR (A := A)) = top :=
  isDcpoWithBottomB_powerB_subset _

/-!
## Continuous-map space `C` and pointwise order `Q`
-/

theorem memB_opairB_eqB_left (F G x y : AName.{u} A) :
  eqB F G sqcap memB (opairB x y) F <= memB (opairB x y) G := by
  rw [inf_comm]
  exact memB_eqB_right F (opairB x y) G

theorem memB_opairB_eqB_right_swap (F G x y : AName.{u} A) :
  eqB G F sqcap memB (opairB x y) G <= memB (opairB x y) F := by
  rw [inf_comm]
  exact memB_eqB_right G (opairB x y) F

theorem mapsToSupB_congr_fun (F G S y Q : AName.{u} A) :
  eqB F G sqcap mapsToSupB F S y Q <= mapsToSupB G S y Q := by
  unfold mapsToSupB
  refine le_inf ?up ?least
  * refine le_iInf fun x => le_iInf fun z => ?_
  rw [le_himp_iff]
  let t :=
    (eqB F G sqcap
      ((? x' : AName.{u} A, ? z' : AName.{u} A,
        memB x' S sqcap memB (opairB x' z') F ? relB Q z' y) sqcap
        ? u : AName.{u} A,
        (? x' : AName.{u} A, ? z' : AName.{u} A,
          memB x' S sqcap memB (opairB x' z') F ? relB Q z' u) ?
          relB Q y u)) sqcap
      (memB x S sqcap memB (opairB x z) G)
    change t <= relB Q z y
  have hF : t <= memB (opairB x z) F :=
    (memB_opairB_eqB_right_swap F G x z).trans' <|
      le_inf
        (show t <= eqB G F from by
          rw [eqB_comm]; exact inf_le_left.trans inf_le_left)
        (show t <= memB (opairB x z) G from
          inf_le_right.trans inf_le_right)
  exact (mapsToSupB_upper_apply F S y Q x z).trans' <| by
  dsimp [t]
  refine le_inf (le_inf (inf_le_left.trans inf_le_right) ?_) hF
  exact inf_le_of_right_le inf_le_left
  * refine le_iInf fun u => ?_
  rw [le_himp_iff]

```

```

have hall :
  eqB F G sqcap
  (? x : AName.{u} A, ? z : AName.{u} A,
    memB x S sqcap memB (opairB x z) G ? relB Q z u) <=
  ? x : AName.{u} A, ? z : AName.{u} A,
    memB x S sqcap memB (opairB x z) F ? relB Q z u := by
  refine le_iInf fun x => le_iInf fun z => ?_
  rw [le_himp_iff]
  let s :=
    (eqB F G sqcap
      (? x' : AName.{u} A, ? z' : AName.{u} A,
        memB x' S sqcap memB (opairB x' z') G ? relB Q z' u)) sqcap
    (memB x S sqcap memB (opairB x z) F)
  change s <= relB Q z u
  have hG : s <= memB (opairB x z) G :=
    (memB_opairB_eqB_left F G x z).trans' <|
    le_inf (inf_le_left.trans inf_le_left)
    (inf_le_right.trans inf_le_right)
  have hx := iInf_le (fun x' : AName.{u} A => ? z' : AName.{u} A,
    memB x' S sqcap memB (opairB x' z') G ? relB Q z' u) x
  have hz := (iInf_le (fun z' : AName.{u} A =>
    memB x S sqcap memB (opairB x z') G ? relB Q z' u) z).trans' hx
  refine (le_himp_iff.mp hz).trans' ?_
  exact le_inf (inf_le_left.trans inf_le_right)
    (le_inf (inf_le_right.trans inf_le_left) hG)
  exact (mapsToSupB_least_apply F S y Q u).trans' <|
  le_inf (inf_le_of_left_le inf_le_right)
    (hall.trans' (le_inf (inf_le_of_left_le inf_le_left) inf_le_right))

theorem isScottContinuousB_congr (F G D E R Q : AName.{u} A) :
  eqB F G sqcap isScottContinuousB F D E R Q <= isScottContinuousB G D E R Q := by
  unfold isScottContinuousB
  refine le_inf (le_inf ?hfun ?hmono) ?hsup
  * exact (isFunctionB_congr F G D E).trans' <|
    le_inf inf_le_left (inf_le_of_right_le (inf_le_of_left_le inf_le_left))
  * refine le_iInf fun x => le_iInf fun x' =>
    le_iInf fun y => le_iInf fun y' => ?_
  rw [le_himp_iff]
  let t :=
    eqB F G sqcap isScottContinuousB F D E R Q sqcap
    (memB (opairB x y) G sqcap memB (opairB x' y') G sqcap relB R x x')
  change t <= relB Q y y'
  have hFxy : t <= memB (opairB x y) F :=
    (memB_opairB_eqB_right_swap F G x y).trans' <| by
    dsimp [t]
    exact le_inf (by
      rw [eqB_comm]
      exact inf_le_left.trans inf_le_left)
      (inf_le_right.trans (inf_le_left.trans inf_le_left))
  have hFx'y' : t <= memB (opairB x' y') F :=
    (memB_opairB_eqB_right_swap F G x' y').trans' <| by

```

Lean 4 source (lines 401–800)

```

  dsimp [t]
  exact le_inf (by
    rw [eqB_comm]
    exact inf_le_left.trans inf_le_left)
    (inf_le_right.trans (inf_le_left.trans inf_le_right))
  exact (scottContinuous_apply_mono
    (F := F) (D := D) (E := E) (R := R) (Q := Q)
    (a := isScottContinuousB F D E R Q) le_rfl x x' y y').trans' <| by
  refine le_inf (le_inf (inf_le_left.trans inf_le_right) hFxy)
    hFx'y')

```



```

      (inf_le_right.trans inf_le_right)
* refine le_iInf fun S => le_iInf fun x => le_iInf fun y => ?_
  rw [le_himp_iff]
  let t :=
    eqB F G sqcap isScottContinuousB F D E R Q sqcap
    (isDirectedRelB S D R sqcap isSupRelB x S R sqcap memB (opairB x y) G)
  change t <= mapsToSupB G S y Q
  have hFy : t <= memB (opairB x y) F :=
    (memB_opairB_eqB_right_swap F G x y).trans' <| by
      dsimp [t]
      exact le_inf (by
        rw [eqB_comm]
        exact inf_le_left.trans inf_le_left)
        (inf_le_right.trans inf_le_right)
  have hmaps : t <= mapsToSupB F S y Q :=
    (scottContinuous_mapsToSup
      (F := F) (D := D) (E := E) (R := R) (Q := Q)
      (a := isScottContinuousB F D E R Q) le_rfl S x y).trans' <| by
      refine le_inf (le_inf (le_inf (inf_le_left.trans inf_le_right)
        (inf_le_right.trans (inf_le_left.trans inf_le_left)))
        (inf_le_right.trans (inf_le_left.trans inf_le_right))) hFy
      exact (mapsToSupB_congr_fun F G S y Q).trans' <|
        le_inf (inf_le_left.trans inf_le_left) hmaps

/-- Scott-continuous self-maps of the Engeler carrier. -/
noncomputable def engelerC : AName.{u} A :=
  sepB (funsB (engelerD (A := A)) (engelerD (A := A)))
  (fun F => isScottContinuousB F (engelerD (A := A)) (engelerD (A := A))
    (engelerR (A := A)) (engelerR (A := A)))

theorem memB_engelerC (F : AName.{u} A) :
  memB F (engelerC (A := A)) =
    isScottContinuousB F (engelerD (A := A)) (engelerD (A := A))
    (engelerR (A := A)) (engelerR (A := A)) := by
  unfold engelerC
  rw [memB_sepB F (funsB (engelerD (A := A)) (engelerD (A := A)))
    (fun G => isScottContinuousB G (engelerD (A := A)) (engelerD (A := A))
      (engelerR (A := A)) (engelerR (A := A)))
    (fun G H => isScottContinuousB_congr G H _ _ _),
    memB_funsB]
  refine le_antisymm inf_le_right ?_
  exact le_inf (inf_le_of_left_le inf_le_left) le_rfl

theorem isContinuousMapSpaceB_engelerC :
  isContinuousMapSpaceB (engelerC (A := A)) (engelerD (A := A))
  (engelerR (A := A)) = top := by
  unfold isContinuousMapSpaceB
  refine inf_eq_top_iff.mpr <subsetB_sepB _ _, ?exact>
  refine iInf_eq_top.mpr fun F => inf_eq_top_iff.mpr <?fwd, ?bwd>
  * rw [memB_engelerC, himp_self]
  * rw [memB_engelerC, himp_self]

theorem pointwiseLeB_congr (F F' G G' D R : AName.{u} A) :
  eqB F F' sqcap eqB G G' sqcap pointwiseLeB F G D R <= pointwiseLeB F' G' D R := by
  unfold pointwiseLeB
  refine le_iInf fun x => le_iInf fun y => le_iInf fun z => ?_
  rw [le_himp_iff]
  let t :=
    eqB F F' sqcap eqB G G' sqcap pointwiseLeB F G D R sqcap
    (memB x D sqcap memB (opairB x y) F' sqcap memB (opairB x z) G')
  change t <= relB R y z
  have hF : t <= memB (opairB x y) F :=
    (memB_opairB_eqB_right_swap F F' x y).trans' <| by

```

```

dsimp [t]
exact le_inf (by
  rw [eqB_comm]
  exact inf_le_left.trans (inf_le_left.trans inf_le_left))
  (inf_le_right.trans (inf_le_left.trans inf_le_right))
have hG : t <= memB (opairB x z) G :=
  (memB_opairB_eqB_right_swap G G' x z).trans' <|
  le_inf
  (show t <= eqB G' G from by
    rw [eqB_comm]
    exact inf_le_left.trans (inf_le_left.trans inf_le_right))
  (show t <= memB (opairB x z) G' from
    inf_le_right.trans inf_le_right)
have hx := iInf_le (fun x' : AName.{u} A => ? y' : AName.{u} A, ? z' : AName.{u} A,
  memB x' D sqcap memB (opairB x' y') F sqcap memB (opairB x' z') G ?
  relB R y' z') x
have hy := (iInf_le (fun y' : AName.{u} A => ? z' : AName.{u} A,
  memB x D sqcap memB (opairB x y') F sqcap memB (opairB x z') G ?
  relB R y' z') y).trans' hx
have hz := (iInf_le (fun z' : AName.{u} A =>
  memB x D sqcap memB (opairB x y) F sqcap memB (opairB x z') G ?
  relB R y z') z).trans' hy
refine (le_himp_iff.mp hz).trans' ?_
refine le_inf ?hpw ?hpre
* dsimp [t]; exact inf_le_left.trans inf_le_right
* refine le_inf (le_inf ?hxD hF) hG
dsimp [t]
exact inf_le_right.trans (inf_le_left.trans inf_le_left)

noncomputable def pointwiseOrderPred (D R p : AName.{u} A) : A :=
  bigcup F : AName.{u} A, bigcup G : AName.{u} A,
  eqB p (opairB F G) sqcap pointwiseLeB F G D R

theorem pointwiseOrderPred_congr (D R p p' : AName.{u} A) :
  eqB p p' sqcap pointwiseOrderPred D R p <= pointwiseOrderPred D R p' := by
  unfold pointwiseOrderPred
  rw [inf_iSup_eq]
  refine iSup_le fun F => ?_
  rw [inf_iSup_eq]
  refine iSup_le fun G => le_iSup_of_le F (le_iSup_of_le G ?_)
  have htrans : eqB p p' sqcap eqB p (opairB F G) <= eqB p' (opairB F G) := by
    rw [eqB_comm (x := p) (y := p')]
    exact eqB_trans p' p (opairB F G)
  exact le_inf
    (htrans.trans' (le_inf inf_le_left (inf_le_of_right_le inf_le_left)))
    (inf_le_of_right_le inf_le_right)

theorem pointwiseOrderPred_opairB (D R F G : AName.{u} A) :
  pointwiseOrderPred D R (opairB F G) = pointwiseLeB F G D R := by
  unfold pointwiseOrderPred
  refine le_antisymm ?le ?ge
  * refine iSup_le fun F' => iSup_le fun G' => ?_
    rw [eqB_opairB]
    exact (pointwiseLeB_congr F' F G' G D R).trans' <| by
      rw [eqB_comm (x := F) (y := F'), eqB_comm (x := G) (y := G')]
  * exact le_iSup_of_le F (le_iSup_of_le G
    (le_inf (le_top.trans (eqB_self (A := A) (opairB F G)).ge) le_refl))

/-- Pointwise order on the Engeler continuous-map space. -/
noncomputable def engelerQ : AName.{u} A :=
  sepB (prodB (engelerC (A := A)) (engelerC (A := A)))
  (pointwiseOrderPred (engelerD (A := A)) (engelerR (A := A)))

```

```

theorem relB_engelerQ (F G : AName.{u} A) :
  relB (engelerQ (A := A)) F G =
    memB F (engelerC (A := A)) sqcap memB G (engelerC (A := A)) sqcap
    pointwiseLeB F G (engelerD (A := A)) (engelerR (A := A)) := by
  unfold relB_engelerQ
  rw [memB_sepB (opairB F G)
    (prodB (engelerC (A := A)) (engelerC (A := A)))
    (pointwiseOrderPred (engelerD (A := A)) (engelerR (A := A)))
    (pointwiseOrderPred_congr _ _),
    memB_opairB_prodB, pointwiseOrderPred_opairB]

theorem isPointwiseOrderB_engelerQ :
  isPointwiseOrderB (engelerQ (A := A)) (engelerC (A := A))
    (engelerD (A := A)) (engelerR (A := A)) = top := by
  unfold isPointwiseOrderB
  refine inf_eq_top_iff.mpr <subsetB_sepB _ _, ?exact>
  refine iInf_eq_top.mpr fun F => iInf_eq_top.mpr fun G => ?_
  have h :
    memB F (engelerC (A := A)) sqcap memB G (engelerC (A := A)) <=
      (relB (engelerQ (A := A)) F G ?
        pointwiseLeB F G (engelerD (A := A)) (engelerR (A := A))) sqcap
        (pointwiseLeB F G (engelerD (A := A)) (engelerR (A := A)) ?
          relB (engelerQ (A := A)) F G) := by
  rw [relB_engelerQ (A := A) F G]
  refine le_inf
  (le_himp_iff.mpr
    (show
      (memB F (engelerC (A := A)) sqcap memB G (engelerC (A := A))) sqcap
      (memB F (engelerC (A := A)) sqcap memB G (engelerC (A := A)) sqcap
        pointwiseLeB F G (engelerD (A := A)) (engelerR (A := A))) <=
        pointwiseLeB F G (engelerD (A := A)) (engelerR (A := A)) from
        inf_le_right.trans inf_le_right))
    (le_himp_iff.mpr
      (show
        (memB F (engelerC (A := A)) sqcap memB G (engelerC (A := A))) sqcap
        pointwiseLeB F G (engelerD (A := A)) (engelerR (A := A)) <=
        memB F (engelerC (A := A)) sqcap memB G (engelerC (A := A)) sqcap
        pointwiseLeB F G (engelerD (A := A)) (engelerR (A := A)) from
        le_inf inf_le_left inf_le_right))
  exact (himp_eq_top_iff
    (a := memB F (engelerC (A := A)) sqcap memB G (engelerC (A := A)))
    (b :=
      (relB (engelerQ (A := A)) F G ?
        pointwiseLeB F G (engelerD (A := A)) (engelerR (A := A))) sqcap
        (pointwiseLeB F G (engelerD (A := A)) (engelerR (A := A)) ?
          relB (engelerQ (A := A)) F G))).mpr h

/-!
## Application graph of a name
-/

theorem subsetB_engelerAppName (F X : AName.{u} A) :
  subsetB (engelerAppName F X) (check (A := A) PSet.omega) = top :=
  subsetB_sepB_omega _

theorem subsetB_engelerAppName_checkExt [Nontrivial A]
  (F X : AName.{u} A) :
  subsetB (engelerAppName F X) (checkExt (A := A) PSet.omega) = top := by
  rw [subsetB_eq_iInf]
  refine iInf_eq_top.mpr fun u => himp_eq_top_iff.mpr ?_
  have hcheck : memB u (engelerAppName F X) <=
    memB u (check (A := A) PSet.omega) :=
    (memB_of_subsetB u (engelerAppName F X) (check (A := A) PSet.omega)).trans'

```

```

    (le_inf le_rfl (le_top.trans (subsetB_engelerAppName F X).ge))
  rwa [eqB_top_memB_right (eqB_check_checkExt (A := A) PSet.omega)] at hcheck

theorem eqB_restrict_engelerAppName [Nontrivial A]
  (F X : AName.{u} A) :
  eqB (engelerAppName F X)
    (restrictName (engelerAppName F X)
      (checkExt (A := A) PSet.omega)) = top :=
  top_unique
  ((subsetB_engelerAppName_checkExt F X).ge.trans
    (subsetB_le_eqB_restrict (engelerAppName F X)
      (checkExt (A := A) PSet.omega)))

theorem engelerAppPred_congr_arg (F X X' q : AName.{u} A) :
  eqB X X' sqcap engelerAppPred F X q <= engelerAppPred F X' q := by
  unfold engelerAppPred
  rw [inf_iSup_eq]
  refine iSup_le fun K => ?_
  rw [inf_iSup_eq]
  refine iSup_le fun n => le_iSup_of_le K (le_iSup_of_le n ?_)
  refine le_inf (le_inf (inf_le_of_right_le (inf_le_of_left_le inf_le_left))
    ?sub) (inf_le_of_right_le inf_le_right)
  exact (subsetB_congr (check (A := A) (finsetPSet K))
    (check (A := A) (finsetPSet K)) X X').trans' <|
  le_inf (le_inf (le_top.trans (eqB_self _).ge) inf_le_left)
    (inf_le_of_right_le (inf_le_of_left_le inf_le_right))

theorem engelerAppName_congr_arg (F X X' : AName.{u} A) :
  eqB X X' <= eqB (engelerAppName F X) (engelerAppName F X') := by
  have hfwd : eqB X X' <= subsetB (engelerAppName F X) (engelerAppName F X') := by
  rw [subsetB_eq_iInf]
  refine le_iInf fun q => ?_
  rw [le_himp_iff, memB_engelerAppName, memB_engelerAppName]
  refine le_inf (inf_le_of_right_le inf_le_left)
    ((engelerAppPred_congr_arg F X X' q).trans' <|
      le_inf inf_le_left (inf_le_of_right_le inf_le_right))
  have hbwd : eqB X X' <= subsetB (engelerAppName F X') (engelerAppName F X) := by
  rw [subsetB_eq_iInf]
  refine le_iInf fun q => ?_
  rw [le_himp_iff, memB_engelerAppName, memB_engelerAppName]
  refine le_inf (inf_le_of_right_le inf_le_left)
    ((engelerAppPred_congr_arg F X' X q).trans' <|
      le_inf (by rw [eqB_comm]; exact inf_le_left)
        (inf_le_of_right_le inf_le_right))
  rw [eqB_eq_subset (engelerAppName F X) (engelerAppName F X')]
  exact le_inf hfwd hbwd

theorem oid_engelerD_eq (i j : (engelerD (A := A)).idx) :
  (oid (engelerD (A := A))).eq i j =
  eqB ((engelerD (A := A)).child i) ((engelerD (A := A)).child j) :=
  oid_eq_powerB (checkExt (A := A) PSet.omega) i j

theorem oid_engelerD_eps (i : (engelerD (A := A)).idx) :
  (oid (engelerD (A := A))).eps i = top := by
  rw [oid_eps]
  exact memB_child_powerB (checkExt (A := A) PSet.omega) i

/-- Boolean equality is invariant under `top`-identification of both sides. -/
theorem eqB_le_eqB_of_eqB_top {a a' b b' : AName.{u} A}
  (ha : eqB a a' = top) (hb : eqB b b' = top) :
  eqB a b <= eqB a' b' := by
  refine (eqB_trans a' a b').trans' (le_inf ?_ ?_)
  * rw [eqB_comm a' a]

```

```

    exact le_top.trans ha.ge
  * exact (eqB_trans a b b').trans' (le_inf le_rfl (le_top.trans hb.ge))

/-- Index-level application of a name `F` on the Engeler carrier. -/
noncomputable def engelerAppIdx [Nontrivial A] (F : AName.{u} A)
  (i : (engelerD (A := A)).idx) : (engelerD (A := A)).idx :=
  restrictPowerIdx (engelerAppName F ((engelerD (A := A)).child i))
  (checkExt (A := A) PSet.omega)

theorem engelerAppIdx_child [Nontrivial A] (F : AName.{u} A)
  (i : (engelerD (A := A)).idx) :
  (engelerD (A := A)).child (engelerAppIdx (A := A) F i) =
  restrictName (engelerAppName F ((engelerD (A := A)).child i))
  (checkExt (A := A) PSet.omega) :=
  restrictPowerIdx_child _ _

theorem engelerAppIdx_functional [Nontrivial A] (F : AName.{u} A) :
  APoset.Functional (oid (engelerD (A := A))) (oid (engelerD (A := A)))
  (engelerAppIdx (A := A) F) := by
  intro i i'
  rw [oid_engelerD_eq, oid_engelerD_eq, engelerAppIdx_child, engelerAppIdx_child]
  exact (eqB_le_eqB_of_eqB_top
    (eqB_restrict_engelerAppName F ((engelerD (A := A)).child i))
    (eqB_restrict_engelerAppName F ((engelerD (A := A)).child i'))).trans'
  (engelerAppName_congr_arg F
    ((engelerD (A := A)).child i)
    ((engelerD (A := A)).child i'))

/-- Relational application of a name `F` as a self-map of `engelerD`. -/
noncomputable def engelerAppRel [Nontrivial A] (F : AName.{u} A) :
  RelFun (oid (engelerD (A := A))) (oid (engelerD (A := A))) :=
  RelFun.ofFunctional _ _ (engelerAppIdx (A := A) F)
  (engelerAppIdx_functional (A := A) F)

/-- Internal graph of `X |-> F * X`. -/
noncomputable def engelerAppGraph [Nontrivial A] (F : AName.{u} A) :
  AName.{u} A :=
  relFunGraphName (engelerD (A := A)) (engelerD (A := A))
  (engelerAppRel (A := A) F)

theorem isFunctionB_engelerAppGraph [Nontrivial A] (F : AName.{u} A) :
  isFunctionB (engelerAppGraph (A := A) F)
  (engelerD (A := A)) (engelerD (A := A)) = top :=
  isFunctionB_relFunGraphName _ _ _

theorem subsetB_engelerAppName_mono (F X X' : AName.{u} A) :
  subsetB X X' <=
  subsetB (engelerAppName F X) (engelerAppName F X') := by
  rw [subsetB_eq_iInf (engelerAppName F X) (engelerAppName F X')]
  refine le_iInf fun q => ?_
  rw [le_himp_iff, memB_engelerAppName, memB_engelerAppName]
  refine le_inf (inf_le_of_right_le inf_le_left) ?_
  have happ : subsetB X X' sqcap engelerAppPred F X q <= engelerAppPred F X' q := by
    unfold engelerAppPred
    rw [inf_iSup_eq]
    refine iSup_le fun K => ?_
    rw [inf_iSup_eq]
    refine iSup_le fun n => le_iSup_of_le K (le_iSup_of_le n ?_)
    refine le_inf (le_inf (inf_le_of_right_le (inf_le_of_left_le inf_le_left)) ?hK)
    (inf_le_of_right_le inf_le_right)
    exact (AName.subsetB_trans (check (A := A) (finsetPSet K)) X X').trans' <|
    le_inf (inf_le_of_right_le (inf_le_of_left_le inf_le_right)) inf_le_left
  exact happ.trans' (le_inf inf_le_left (inf_le_of_right_le inf_le_right))

```

```

theorem engelerAppRel_val [Nontrivial A] (F : AName.{u} A)
  (i j : (engelerD (A := A)).idx) :
  (engelerAppRel (A := A) F).val i j =
    (oid (engelerD (A := A))).eq (engelerAppIdx (A := A) F i) j := by
change (oid (engelerD (A := A))).eps i sqcap
  (oid (engelerD (A := A))).eq (engelerAppIdx (A := A) F i) j = _
rw [oid_engelerD_eps, top_inf_eq]

theorem memB_opairB_engelerAppGraph [Nontrivial A]
  (F x y : AName.{u} A) :
  memB (opairB x y) (engelerAppGraph (A := A) F) =
    bigcup i : (engelerD (A := A)).idx, bigcup j : (engelerD (A := A)).idx,
    eqB x ((engelerD (A := A)).child i) sqcap
    eqB y ((engelerD (A := A)).child j) sqcap
    (oid (engelerD (A := A))).eq
    (engelerAppIdx (A := A) F i) j := by
unfold engelerAppGraph
rw [relFunGraphName, memB_mk]
refine le_antisymm ?le ?ge
* refine iSup_le fun p => ?_
  rw [eqB_opairB, engelerAppRel_val]
  exact le_iSup_of_le p.1 (le_iSup_of_le p.2 le_refl)
* refine iSup_le fun i => iSup_le fun j => ?_
  refine le_iSup_of_le (i, j) ?_
  rw [eqB_opairB, engelerAppRel_val]

theorem engelerAppGraph_mem_le_eqB [Nontrivial A]
  (F x y : AName.{u} A) :
  memB (opairB x y) (engelerAppGraph (A := A) F) <=
    memB x (engelerD (A := A)) sqcap memB y (engelerD (A := A)) sqcap
    eqB y (engelerAppName F x) := by
have hprod : memB (opairB x y) (engelerAppGraph (A := A) F) <=
  memB x (engelerD (A := A)) sqcap memB y (engelerD (A := A)) := by
have hsub := isFunctionB_subset (isFunctionB_engelerAppGraph (A := A) F)
have hm := memB_of_subsetB (opairB x y)
  (engelerAppGraph (A := A) F)
  (prodB (engelerD (A := A)) (engelerD (A := A)))
rw [hsub, inf_top_eq] at hm
rwa [memB_opairB_prodB] at hm
refine le_inf hprod ?heq
rw [memB_opairB_engelerAppGraph]
refine iSup_le fun i => iSup_le fun j => ?_
rw [oid_engelerD_eq, engelerAppIdx_child]
let t :=
  eqB x ((engelerD (A := A)).child i) sqcap
  eqB y ((engelerD (A := A)).child j) sqcap
  eqB (restrictName (engelerAppName F ((engelerD (A := A)).child i))
    (checkExt (A := A) PSet.omega))
    ((engelerD (A := A)).child j)
change t <= eqB y (engelerAppName F x)
have hyj : t <= eqB y ((engelerD (A := A)).child j) :=
  inf_le_left.trans inf_le_right
have hjr : t <=
  eqB ((engelerD (A := A)).child j)
  (restrictName (engelerAppName F ((engelerD (A := A)).child i))
    (checkExt (A := A) PSet.omega)) := by
rw [eqB_comm]
exact inf_le_right
have hyr : t <=
  eqB y
  (restrictName (engelerAppName F ((engelerD (A := A)).child i))
    (checkExt (A := A) PSet.omega)) :=

```

```

    (eqB_trans y ((engelerD (A := A)).child j)
      (restrictName (engelerAppName F ((engelerD (A := A)).child i))
        (checkExt (A := A) PSet.omega))).trans'
    (le_inf hyj hjr)
have hra : eqB
  (restrictName (engelerAppName F ((engelerD (A := A)).child i))
    (checkExt (A := A) PSet.omega))
  (engelerAppName F ((engelerD (A := A)).child i)) = top := by
  rw [eqB_comm]
  exact eqB_restrict_engelerAppName F ((engelerD (A := A)).child i)
have hya : t <= eqB y (engelerAppName F ((engelerD (A := A)).child i)) :=
  (eqB_trans y

```

Lean 4 source (lines 801–1200)

```

    (restrictName (engelerAppName F ((engelerD (A := A)).child i))
      (checkExt (A := A) PSet.omega))
    (engelerAppName F ((engelerD (A := A)).child i))).trans' <|
  le_inf hyr (le_top.trans hra.ge)
have hxi : t <= eqB ((engelerD (A := A)).child i) x := by
  rw [eqB_comm]
  exact inf_le_left.trans inf_le_left
exact (eqB_trans y (engelerAppName F ((engelerD (A := A)).child i))
  (engelerAppName F x)).trans' <|
  le_inf hya
  ((engelerAppName_congr_arg F ((engelerD (A := A)).child i) x).trans' hxi)

theorem engelerAppGraph_mono [Nontrivial A] (F x x' y y' : AName.{u} A) :
  memB (opairB x y) (engelerAppGraph (A := A) F) sqcap
    memB (opairB x' y') (engelerAppGraph (A := A) F) sqcap
    relB (engelerR (A := A)) x x' <=
    relB (engelerR (A := A)) y y' := by
  let t :=
    memB (opairB x y) (engelerAppGraph (A := A) F) sqcap
    memB (opairB x' y') (engelerAppGraph (A := A) F) sqcap
    relB (engelerR (A := A)) x x'
  have hyall : t <=
    memB x (engelerD (A := A)) sqcap memB y (engelerD (A := A)) sqcap
    eqB y (engelerAppName F x) :=
    (engelerAppGraph_mem_le_eqB (A := A) F x y).trans'
    (inf_le_left.trans inf_le_left)
  have hy'all : t <=
    memB x' (engelerD (A := A)) sqcap memB y' (engelerD (A := A)) sqcap
    eqB y' (engelerAppName F x') :=
    (engelerAppGraph_mem_le_eqB (A := A) F x' y').trans'
    (inf_le_left.trans inf_le_right)
  have hyD : t <= memB y (engelerD (A := A)) :=
    hyall.trans (inf_le_left.trans inf_le_right)
  have hy'D : t <= memB y' (engelerD (A := A)) :=
    hy'all.trans (inf_le_left.trans inf_le_right)
  have hyeq : t <= eqB y (engelerAppName F x) :=
    hyall.trans inf_le_right
  have hy'eq : t <= eqB y' (engelerAppName F x') :=
    hy'all.trans inf_le_right
  have hxx' : t <= subsetB x x' := by
    have hrel : t <= relB (engelerR (A := A)) x x' := inf_le_right
    rw [relB_engelerR] at hrel
    exact hrel.trans inf_le_right
  have happ : t <= subsetB (engelerAppName F x) (engelerAppName F x') :=
    (subsetB_engelerAppName_mono F x x').trans' hxx'
  have hsub : t <= subsetB y y' :=
    (AName.subsetB_trans y (engelerAppName F x) y').trans' <|
    le_inf ((eqB_le_subsetB y (engelerAppName F x)).trans' hyeq) <|
    (AName.subsetB_trans (engelerAppName F x) (engelerAppName F x') y').trans' <|

```

```

    le_inf happ
      ((eqB_le_subsetB (engelerAppName F x') y').trans' <| by
        rw [eqB_comm]
        exact hy'eq)
  change t <= relB (engelerR (A := A)) y y'
  rw [relB_engelerR]
  exact le_inf (le_inf hyD hy'D) hsub

theorem isDirectedRelB_le_isDirectedSubsetB (S D : AName.{u} A) :
  isDirectedRelB S D (subsetOrderRelB D) <= isDirectedSubsetB S := by
  unfold isDirectedRelB isDirectedSubsetB
  refine le_inf (inf_le_of_left le_inf_le_right) ?_
  refine le_iInf (fun x : AName.{u} A => le_iInf (fun y : AName.{u} A => ?_))
  have hx := iInf_le (fun x' : AName.{u} A =>
    ? y' : AName.{u} A,
    memB x' S sqcap memB y' S ?
    bigcup z : AName.{u} A,
    memB z S sqcap relB (subsetOrderRelB D) x' z sqcap
    relB (subsetOrderRelB D) y' z) x
  have hy := (iInf_le (fun y' : AName.{u} A =>
    memB x S sqcap memB y' S ?
    bigcup z : AName.{u} A,
    memB z S sqcap relB (subsetOrderRelB D) x z sqcap
    relB (subsetOrderRelB D) y' z) y).trans' hx
  refine inf_le_right.trans (hy.trans ?_)
  refine himp_le_himp le_rfl ?_
  refine iSup_le (fun z : AName.{u} A => ?_)
  refine le_iSup_of_le z ?_
  rw [relB_subsetOrderRelB, relB_subsetOrderRelB]
  refine le_inf
    (le_inf (inf_le_left.trans inf_le_left)
      (inf_le_left.trans (inf_le_right.trans inf_le_right)))
    (inf_le_right.trans inf_le_right)

theorem eqB_of_relB_antisymm (D x y : AName.{u} A) :
  relB (subsetOrderRelB D) x y sqcap relB (subsetOrderRelB D) y x <=
  eqB x y := by
  rw [relB_subsetOrderRelB, relB_subsetOrderRelB, eqB_eq_subset]
  exact le_inf (inf_le_left.trans inf_le_right) (inf_le_right.trans inf_le_right)

theorem isSupRelB_le_relB (x y S R : AName.{u} A) :
  isSupRelB x S R sqcap isSupRelB y S R <= relB R x y :=
  (isSupRelB_least x S R y).trans' <|
  le_inf inf_le_left (inf_le_of_right le_inf_le_left)

theorem eqB_of_isSupRelB_subset (D x y S : AName.{u} A) :
  isSupRelB x S (subsetOrderRelB D) sqcap
  isSupRelB y S (subsetOrderRelB D) <=
  eqB x y := by
  have hxy := isSupRelB_le_relB x y S (subsetOrderRelB D)
  have hyx :
    isSupRelB x S (subsetOrderRelB D) sqcap
    isSupRelB y S (subsetOrderRelB D) <=
    relB (subsetOrderRelB D) y x :=
    (isSupRelB_le_relB y x S (subsetOrderRelB D)).trans'
    (le_inf inf_le_right inf_le_left)
  exact (eqB_of_relB_antisymm D x y).trans' (le_inf hxy hyx)

theorem isDirectedRelB_le_eqB_sUnionB (S X x : AName.{u} A) :
  isDirectedRelB S (powerB X) (subsetOrderRelB (powerB X)) sqcap
  isSupRelB x S (subsetOrderRelB (powerB X)) <=
  eqB x (sUnionB S) := by
  have hunion :

```



```

    isDirectedRelB S (powerB X) (subsetOrderRelB (powerB X)) <=
      isSupRelB (sUnionB S) S (subsetOrderRelB (powerB X)) :=
    ((isSupRelB_sUnionB_powerB S X).trans' <|
      le_inf
        (isDirectedRelB_le_subsetB S (powerB X) (subsetOrderRelB (powerB X)))
        (isDirectedRelB_le_nonempty S (powerB X)
          (subsetOrderRelB (powerB X))))).trans
      inf_le_right
  exact (eqB_of_isSupRelB_subset (powerB X) x (sUnionB S) S).trans' <|
    le_inf inf_le_right (hunion.trans' inf_le_left)

theorem eqB_check_finsetPSet_finsetB (K : Finset Nat) :
  eqB (check (A := A) (finsetPSet K))
    (finsetB (fun i : Fin K.card =>
      check (A := A) (PSet.ofNat (K.orderEmbOfFin rfl i)))) = top := by
  have h := eqB_check_of_equiv (A := A) (finsetPSet_equiv_enum K)
  rw [check_pfinEnum] at h
  exact h

theorem engelerAppGraph_mapsToSup_upper [Nontrivial A]
  (F S x y z w : AName.{u} A) :
  isDirectedRelB S (engelerD (A := A)) (engelerR (A := A)) sqcap
    isSupRelB x S (engelerR (A := A)) sqcap
      memB (opairB x y) (engelerAppGraph (A := A) F) sqcap
        memB z S sqcap
          memB (opairB z w) (engelerAppGraph (A := A) F) <=
            relB (engelerR (A := A)) w y := by
  let t :=
    isDirectedRelB S (engelerD (A := A)) (engelerR (A := A)) sqcap
      isSupRelB x S (engelerR (A := A)) sqcap
        memB (opairB x y) (engelerAppGraph (A := A) F) sqcap
          memB z S sqcap
            memB (opairB z w) (engelerAppGraph (A := A) F)
  have hsup : t <= isSupRelB x S (engelerR (A := A)) :=
    inf_le_left.trans (inf_le_left.trans (inf_le_left.trans inf_le_right))
  have hup : t <= isUpperBoundRelB x S (engelerR (A := A)) :=
    hsup.trans inf_le_left
  have hzx : t <= relB (engelerR (A := A)) z x :=
    (isUpperBoundRelB_apply x S (engelerR (A := A)) z).trans' <|
      le_inf hup (inf_le_left.trans inf_le_right)
  have hzw : t <= memB (opairB z w) (engelerAppGraph (A := A) F) :=
    inf_le_right
  have hxy : t <= memB (opairB x y) (engelerAppGraph (A := A) F) :=
    inf_le_left.trans (inf_le_left.trans inf_le_right)
  exact (engelerAppGraph_mono (A := A) F z x w y).trans' <|
    le_inf (le_inf hzw hxy) hzx

theorem finsetPSet_le_exists_directed (K : Finset Nat)
  (T ? : AName.{u} A) :
  subsetB (check (A := A) (finsetPSet K)) T sqcap
    isDirectedSubsetB ? sqcap subsetUnionB T ? <=
      bigcup U, memB U ? sqcap
    subsetB (check (A := A) (finsetPSet K)) U := by
  have henum := eqB_check_finsetPSet_finsetB (A := A) K
  let xs : Fin K.card -> AName.{u} A :=
    fun i => check (A := A) (PSet.ofNat (K.orderEmbOfFin rfl i))
  have hT :
    subsetB (check (A := A) (finsetPSet K)) T =
      subsetB (finsetB xs) T :=
    subsetB_eqB_congr_left henum
  rw [hT]
  refine (finsetB_le_exists_directed xs T ?).trans ?_
  refine iSup_le fun U => le_iSup_of_le U ?_

```

```

refine le_inf inf_le_left ?_
have hU :
  subsetB (finsetB xs) U =
    subsetB (check (A := A) (finsetPSet K)) U :=
    subsetB_eqB_congr_left (by rw [eqB_comm]; exact henum)
rw [hU]
exact inf_le_right

theorem isDirectedRelB_engeler_eqB_sUnion (S x : AName.{u} A) :
  isDirectedRelB S (engelerD (A := A)) (engelerR (A := A)) sqcap
    isSupRelB x S (engelerR (A := A)) <=
    eqB x (sUnionB S) :=
  isDirectedRelB_le_eqB_sUnionB S (checkExt (A := A) PSet.omega) x

theorem finsetPSet_le_exists_engeler_directed (K : Finset Nat)
  (S x : AName.{u} A) :
  isDirectedRelB S (engelerD (A := A)) (engelerR (A := A)) sqcap
    isSupRelB x S (engelerR (A := A)) sqcap
    subsetB (check (A := A) (finsetPSet K)) x <=
    bigcup z, memB z S sqcap subsetB (check (A := A) (finsetPSet K)) z := by
let t :=
  isDirectedRelB S (engelerD (A := A)) (engelerR (A := A)) sqcap
    isSupRelB x S (engelerR (A := A)) sqcap
    subsetB (check (A := A) (finsetPSet K)) x
have hdir : t <= isDirectedSubsetB S :=
  (isDirectedRelB_le_isDirectedSubsetB S (engelerD (A := A))).trans'
  (inf_le_left.trans inf_le_left)
have heq : t <= eqB x (sUnionB S) :=
  (isDirectedRelB_engeler_eqB_sUnion S x).trans'
  (inf_le_left)
have hunion : t <= subsetUnionB x S := by
  rw [← subsetB_sUnionB_eq_subsetUnionB]
  exact (eqB_le_subsetB x (sUnionB S)).trans' heq
have hKx : t <= subsetB (check (A := A) (finsetPSet K)) x :=
  inf_le_right
exact (finsetPSet_le_exists_directed K x S).trans' <|
  le_inf (le_inf hKx hdir) hunion

theorem engelerAppPred_of_pair (F z q : AName.{u} A)
  (K : Finset Nat) (n : Nat) :
  eqB q (check (PSet.ofNat n)) sqcap
    subsetB (check (A := A) (finsetPSet K)) z sqcap
    memB (pairApplyB (A := A) K n) F <=
    engelerAppPred F z q :=
  le_iSup_of_le K (le_iSup_of_le n le_rfl)

theorem engelerAppPred_le_exists_engeler_directed
  (F S x q : AName.{u} A) (K : Finset Nat) (n : Nat) :
  isDirectedRelB S (engelerD (A := A)) (engelerR (A := A)) sqcap
    isSupRelB x S (engelerR (A := A)) sqcap
    (eqB q (check (PSet.ofNat n)) sqcap
      subsetB (check (A := A) (finsetPSet K)) x sqcap
      memB (pairApplyB (A := A) K n) F) <=
    bigcup z, memB z S sqcap engelerAppPred F z q := by
let t :=
  isDirectedRelB S (engelerD (A := A)) (engelerR (A := A)) sqcap
    isSupRelB x S (engelerR (A := A)) sqcap
    (eqB q (check (PSet.ofNat n)) sqcap
      subsetB (check (A := A) (finsetPSet K)) x sqcap
      memB (pairApplyB (A := A) K n) F)
have hland :
  t <= bigcup z, memB z S sqcap subsetB (check (A := A) (finsetPSet K)) z :=
  (finsetPSet_le_exists_engeler_directed K S x).trans' <|

```

```

    le_inf (inf_le_left)
    (inf_le_right.trans (inf_le_left.trans inf_le_right))
have hq : t <= eqB q (check (PSet.ofNat n)) :=
  inf_le_right.trans (inf_le_left.trans inf_le_left)
have hpair : t <= memB (pairApplyB (A := A) K n) F :=
  inf_le_right.trans inf_le_right
have hcomb : t <=
  (bigcup z, memB z S sqcap subsetB (check (A := A) (finsetPSet K)) z) sqcap
  (eqB q (check (PSet.ofNat n)) sqcap
   memB (pairApplyB (A := A) K n) F) :=
  le_inf hland (le_inf hq hpair)
refine hcomb.trans ?_
rw [inf_comm, inf_iSup_eq]
refine iSup_le fun z => le_iSup_of_le z ?_
refine le_inf (inf_le_right.trans inf_le_left)
  ((engelerAppPred_of_pair F z q K n).trans' <|
   le_inf
    (le_inf (inf_le_left.trans inf_le_left)
             (inf_le_right.trans inf_le_right))
    (inf_le_left.trans inf_le_right))

theorem engelerAppGraph_eval_le_upper [Nontrivial A]
  (F S u z q : AName.{u} A) :
  memB z S sqcap engelerAppPred F z q sqcap
  memB q (check (A := A) PSet.omega) sqcap
  (? x : AName.{u} A, ? w : AName.{u} A,
   memB x S sqcap memB (opairB x w) (engelerAppGraph (A := A) F) ?
   relB (engelerR (A := A)) w u) sqcap
  subsetB S (engelerD (A := A)) <=
  memB q u := by
let t :=
  memB z S sqcap engelerAppPred F z q sqcap
  memB q (check (A := A) PSet.omega) sqcap
  (? x : AName.{u} A, ? w : AName.{u} A,
   memB x S sqcap memB (opairB x w) (engelerAppGraph (A := A) F) ?
   relB (engelerR (A := A)) w u) sqcap
  subsetB S (engelerD (A := A))
have hzS : t <= memB z S :=
  inf_le_left.trans (inf_le_left.trans (inf_le_left.trans (inf_le_left)))
have hpred : t <= engelerAppPred F z q :=
  inf_le_left.trans (inf_le_left.trans (inf_le_left.trans inf_le_right))
have hq? : t <= memB q (check (A := A) PSet.omega) :=
  inf_le_left.trans (inf_le_left.trans inf_le_right)
have hupper : t <=
  (? x : AName.{u} A, ? w : AName.{u} A,
   memB x S sqcap memB (opairB x w) (engelerAppGraph (A := A) F) ?
   relB (engelerR (A := A)) w u) :=
  inf_le_left.trans inf_le_right
have hsub : t <= subsetB S (engelerD (A := A)) := inf_le_right
have hzD : t <= memB z (engelerD (A := A)) :=
  (subsetB_le_memB_of_mem S (engelerD (A := A)) z).trans'
  (le_inf hsub hzS)
have htot : t <=
  bigcup w, memB (opairB z w) (engelerAppGraph (A := A) F) := by
have hT := isFunctionB_total (isFunctionB_engelerAppGraph (A := A) F)
have happ := isTotalB_apply (engelerAppGraph (A := A) F)
  (engelerD (A := A)) z
refine happ.trans' ?_
rw [hT, top_inf_eq]
exact hzD
have happz : t <= memB q (engelerAppName F z) := by
  rw [memB_engelerAppName]
  exact le_inf hq? hpred

```

```

have ht :
  t = t sqcap bigcup w, memB (opairB z w) (engelerAppGraph (A := A) F) :=
    (inf_eq_left.mpr htot).symm
change t <= memB q u
rw [ht, inf_iSup_eq]
refine iSup_le fun w => ?_
let s :=
  t sqcap memB (opairB z w) (engelerAppGraph (A := A) F)
change s <= memB q u
have hzw : s <= memB (opairB z w) (engelerAppGraph (A := A) F) :=
  inf_le_right
have hweq : s <= eqB w (engelerAppName F z) :=
  (engelerAppGraph_mem_le_eqB (A := A) F z w).trans' hzw |>.trans
  inf_le_right
have hqw : s <= memB q w :=
  (memB_eqB_right (engelerAppName F z) q w).trans' <|
  le_inf (happz.trans' inf_le_left)
  (by rw [eqB_comm]; exact hweq)
have hx := iInf_le (fun x' : AName.{u} A =>
  ? w' : AName.{u} A,
  memB x' S sqcap memB (opairB x' w') (engelerAppGraph (A := A) F) ?
  relB (engelerR (A := A)) w' u) z
have hw := (iInf_le (fun w' : AName.{u} A =>
  memB z S sqcap memB (opairB z w') (engelerAppGraph (A := A) F) ?
  relB (engelerR (A := A)) w' u) w).trans' hx
have hrel : s <= relB (engelerR (A := A)) w u :=
  (le_himp_iff.mp hw).trans' <|
  le_inf (hupper.trans' inf_le_left)
  (le_inf (hzS.trans' inf_le_left) hzw)
have hsubwu : s <= subsetB w u := by
  have hrel' : s <= relB (engelerR (A := A)) w u := hrel
  rw [relB_engelerR] at hrel'
  exact hrel'.trans inf_le_right
exact (memB_of_subsetB q w u).trans' (le_inf hqw hsubwu)

theorem engelerAppGraph_mapsToSup_least_subset [Nontrivial A]
  (F S x y u : AName.{u} A) :
  isDirectedRelB S (engelerD (A := A)) (engelerR (A := A)) sqcap
  isSupRelB x S (engelerR (A := A)) sqcap
  memB (opairB x y) (engelerAppGraph (A := A) F) sqcap
  (? z : AName.{u} A, ? w : AName.{u} A,
  memB z S sqcap memB (opairB z w) (engelerAppGraph (A := A) F) ?
  relB (engelerR (A := A)) w u) <=
  subsetB y u := by
let t :=
  isDirectedRelB S (engelerD (A := A)) (engelerR (A := A)) sqcap
  isSupRelB x S (engelerR (A := A)) sqcap
  memB (opairB x y) (engelerAppGraph (A := A) F) sqcap
  (? z : AName.{u} A, ? w : AName.{u} A,
  memB z S sqcap memB (opairB z w) (engelerAppGraph (A := A) F) ?
  relB (engelerR (A := A)) w u)
have hyeq : t <= eqB y (engelerAppName F x) :=
  (engelerAppGraph_mem_le_eqB (A := A) F x y).trans'
  (inf_le_left.trans inf_le_right) |>.trans inf_le_right
have hdir : t <=
  isDirectedRelB S (engelerD (A := A)) (engelerR (A := A)) :=
  inf_le_left.trans (inf_le_left.trans inf_le_left)
have hsup : t <= isSupRelB x S (engelerR (A := A)) :=
  inf_le_left.trans (inf_le_left.trans inf_le_right)
have hupper : t <=
  (? z : AName.{u} A, ? w : AName.{u} A,
  memB z S sqcap memB (opairB z w) (engelerAppGraph (A := A) F) ?
  relB (engelerR (A := A)) w u) :=

```

```

inf_le_right
have hSD : t <= subsetB S (engelerD (A := A)) :=
  (isDirectedRelB_le_subsetB S (engelerD (A := A))
   (engelerR (A := A))).trans' hdir
have happu : t <= subsetB (engelerAppName F x) u := by
  rw [subsetB_eq_iInf (engelerAppName F x) u]
  refine le_iInf fun q => ?_
  rw [le_himp_iff, memB_engelerAppName]
  let s :=
    t sqcap (memB q (check (A := A) PSet.omega) sqcap engelerAppPred F x q)
  change s <= memB q u
  have hq? : s <= memB q (check (A := A) PSet.omega) :=
    inf_le_right.trans inf_le_left
  have hpred : s <= engelerAppPred F x q :=
    inf_le_right.trans inf_le_right
  unfold engelerAppPred at hpred
  have hspred : s = s sqcap engelerAppPred F x q :=
    (inf_eq_left.mpr hpred).symm
  rw [hspred]
  unfold engelerAppPred
  rw [inf_iSup_eq]
  refine iSup_le fun K => ?_
  rw [inf_iSup_eq]
  refine iSup_le fun n => ?_
  let p :=
    eqB q (check (PSet.ofNat n)) sqcap
    subsetB (check (A := A) (finsetPSet K)) x sqcap
    memB (pairApplyB (A := A) K n) F
  have hland : s sqcap p <= bigcup z, memB z S sqcap engelerAppPred F z q :=
    (engelerAppPred_le_exists_engeler_directed F S x q K n).trans' <|
    le_inf (le_inf
      (hdir.trans' (inf_le_left.trans inf_le_left))
      (hsup.trans' (inf_le_left.trans inf_le_left)))
    inf_le_right
  have heq : s sqcap p = (s sqcap p) sqcap bigcup z, memB z S sqcap engelerAppPred
    F z q :=
    (inf_eq_left.mpr hland).symm

```

Lean 4 source (lines 1201–1600)

```

change s sqcap p <= memB q u
rw [heq, inf_iSup_eq]
refine iSup_le fun z => ?_
exact (engelerAppGraph_eval_le_upper (A := A) F S u z q).trans' <|
  le_inf
    (le_inf
      (le_inf
        (le_inf (inf_le_right.trans inf_le_left)
          (inf_le_right.trans inf_le_right))
        (hq?.trans' (inf_le_left.trans inf_le_left)))
      (hupper.trans' (inf_le_left.trans (inf_le_left.trans inf_le_left))))
    (hSD.trans' (inf_le_left.trans (inf_le_left.trans inf_le_left)))
exact (AName.subsetB_trans y (engelerAppName F x) u).trans' <|
  le_inf ((eqB_le_subsetB y (engelerAppName F x)).trans' hyeq) happu

theorem engelerAppGraph_mapsToSup_least [Nontrivial A]
  (F S x y u : AName.{u} A) :
  isDirectedRelB S (engelerD (A := A)) (engelerR (A := A)) sqcap
  isSupRelB x S (engelerR (A := A)) sqcap
  memB (opairB x y) (engelerAppGraph (A := A) F) sqcap
  (? z : AName.{u} A, ? w : AName.{u} A,
    memB z S sqcap memB (opairB z w) (engelerAppGraph (A := A) F) ?
    relB (engelerR (A := A)) w u) <=
  relB (engelerR (A := A)) y u := by

```

```

let t :=
  isDirectedRelB S (engelerD (A := A)) (engelerR (A := A)) sqcap
  isSupRelB x S (engelerR (A := A)) sqcap
  memB (opairB x y) (engelerAppGraph (A := A) F) sqcap
  (? z : AName.{u} A, ? w : AName.{u} A,
    memB z S sqcap memB (opairB z w) (engelerAppGraph (A := A) F) ?
    relB (engelerR (A := A)) w u)
have hsub : t <= subsetB y u :=
  engelerAppGraph_mapsToSup_least_subset (A := A) F S x y u
have hyD : t <= memB y (engelerD (A := A)) :=
  (engelerAppGraph_mem_le_eqB (A := A) F x y).trans'
  (inf_le_left.trans inf_le_right) |>.trans
  (inf_le_left.trans inf_le_right)
have hdir : t <=
  isDirectedRelB S (engelerD (A := A)) (engelerR (A := A)) :=
  inf_le_left.trans (inf_le_left.trans inf_le_left)
have hne : t <= bigcup z, memB z S :=
  (isDirectedRelB_le_nonempty S (engelerD (A := A))
    (engelerR (A := A))).trans' hdir
have hSD : t <= subsetB S (engelerD (A := A)) :=
  (isDirectedRelB_le_subsetB S (engelerD (A := A))
    (engelerR (A := A))).trans' hdir
have hupper : t <=
  (? z : AName.{u} A, ? w : AName.{u} A,
    memB z S sqcap memB (opairB z w) (engelerAppGraph (A := A) F) ?
    relB (engelerR (A := A)) w u) :=
  inf_le_right
have huD : t <= memB u (engelerD (A := A)) := by
  have ht : t = t sqcap bigcup z, memB z S := (inf_eq_left.mpr hne).symm
  change t <= memB u (engelerD (A := A))
  rw [ht, inf_iSup_eq]
  refine iSup_le fun z => ?_
  have hzS : t sqcap memB z S <= memB z S := inf_le_right
  have hzD : t sqcap memB z S <= memB z (engelerD (A := A)) :=
    (subsetB_le_memB_of_mem S (engelerD (A := A)) z).trans' <|
    le_inf (hSD.trans' inf_le_left) hzS
  have htot : t sqcap memB z S <=
    bigcup w, memB (opairB z w) (engelerAppGraph (A := A) F) := by
    have hT := isFunctionB_total (isFunctionB_engelerAppGraph (A := A) F)
    have happ := isTotalB_apply (engelerAppGraph (A := A) F)
    (engelerD (A := A)) z
    refine happ.trans' ?_
    rw [hT, top_inf_eq]
    exact hzD
  have htw : t sqcap memB z S =
    (t sqcap memB z S) sqcap
    bigcup w, memB (opairB z w) (engelerAppGraph (A := A) F) :=
    (inf_eq_left.mpr htot).symm
  rw [htw, inf_iSup_eq]
  refine iSup_le fun w => ?_
  have hx := iInf_le (fun z' : AName.{u} A =>
    ? w' : AName.{u} A,
    memB z' S sqcap memB (opairB z' w') (engelerAppGraph (A := A) F) ?
    relB (engelerR (A := A)) w' u) z
  have hw := (iInf_le (fun w' : AName.{u} A =>
    memB z S sqcap memB (opairB z w') (engelerAppGraph (A := A) F) ?
    relB (engelerR (A := A)) w' u) w).trans' hx
  have hrel :
    (t sqcap memB z S) sqcap
    memB (opairB z w) (engelerAppGraph (A := A) F) <=
    relB (engelerR (A := A)) w u :=
    (le_himp_iff.mp hw).trans' <|
    le_inf (hupper.trans' (inf_le_left.trans inf_le_left))

```

```

      (le_inf (inf_le_left.trans inf_le_right) inf_le_right)
    rw [relB_engelerR] at hrel
    exact hrel.trans (inf_le_left.trans inf_le_right)
  change t <= relB (engelerR (A := A)) y u
  rw [relB_engelerR]
  exact le_inf (le_inf hyD huD) hsub

theorem mapsToSupB_engelerAppGraph [Nontrivial A]
  (F S x y : AName.{u} A) :
  isDirectedRelB S (engelerD (A := A)) (engelerR (A := A)) sqcap
    isSupRelB x S (engelerR (A := A)) sqcap
    memB (opairB x y) (engelerAppGraph (A := A) F) <=
    mapsToSupB (engelerAppGraph (A := A) F) S y
    (engelerR (A := A)) := by
  unfold mapsToSupB
  refine le_inf ?up ?least
  * refine le_iInf fun z => le_iInf fun w => ?_
    rw [le_himp_iff]
    exact (engelerAppGraph_mapsToSup_upper (A := A) F S x y z w).trans' <|
      le_inf
        (le_inf inf_le_left (inf_le_right.trans inf_le_left))
        (inf_le_right.trans inf_le_right)
  * refine le_iInf fun u => ?_
    rw [le_himp_iff]
    exact engelerAppGraph_mapsToSup_least (A := A) F S x y u

theorem isScottContinuousB_engelerAppGraph [Nontrivial A]
  (F : AName.{u} A) :
  isScottContinuousB (engelerAppGraph (A := A) F)
    (engelerD (A := A)) (engelerD (A := A))
    (engelerR (A := A)) (engelerR (A := A)) = top := by
  unfold isScottContinuousB
  refine inf_eq_top_iff.mpr <inf_eq_top_iff.mpr <?hfun, ?hmono>, ?hsup>
  * exact isFunctionB_engelerAppGraph (A := A) F
  * refine iInf_eq_top.mpr fun x => iInf_eq_top.mpr fun x' =>
    iInf_eq_top.mpr fun y => iInf_eq_top.mpr fun y' =>
    himp_eq_top_iff.mpr (engelerAppGraph_mono (A := A) F x x' y y')
  * refine iInf_eq_top.mpr fun S => iInf_eq_top.mpr fun x =>
    iInf_eq_top.mpr fun y => himp_eq_top_iff.mpr ?_
    exact mapsToSupB_engelerAppGraph (A := A) F S x y

theorem memB_engelerC_engelerAppGraph [Nontrivial A]
  (F : AName.{u} A) :
  memB (engelerAppGraph (A := A) F) (engelerC (A := A)) = top := by
  rw [memB_engelerC]
  exact isScottContinuousB_engelerAppGraph (A := A) F

theorem engelerAppPred_congr_fun (F F' X q : AName.{u} A) :
  eqB F F' sqcap engelerAppPred F X q <= engelerAppPred F' X q := by
  unfold engelerAppPred
  rw [inf_iSup_eq]
  refine iSup_le fun K => ?_
  rw [inf_iSup_eq]
  refine iSup_le fun n => le_iSup_of_le K (le_iSup_of_le n ?_)
  refine le_inf (le_inf (inf_le_of_right_le (inf_le_of_left_le inf_le_left))
    (inf_le_of_right_le (inf_le_of_left_le inf_le_right))) ?_
  exact (memB_eqB_right F (pairApplyB (A := A) K n) F').trans' <|
    le_inf (inf_le_of_right_le inf_le_right) inf_le_left

theorem engelerAppName_congr_fun (F F' X : AName.{u} A) :
  eqB F F' <= eqB (engelerAppName F X) (engelerAppName F' X) := by
  have hfwd : eqB F F' <= subsetB (engelerAppName F X) (engelerAppName F' X) := by
  rw [subsetB_eq_iInf (engelerAppName F X) (engelerAppName F' X)]

```

```

    refine le_iInf fun q => ?_
    rw [le_himp_iff, memB_engelerAppName, memB_engelerAppName]
    refine le_inf (inf_le_of_right_le inf_le_left)
      ((engelerAppPred_congr_fun F F' X q).trans' <|
        le_inf inf_le_left (inf_le_of_right_le inf_le_right))
  have hbwd : eqB F F' <= subsetB (engelerAppName F' X) (engelerAppName F X) := by
    rw [subsetB_eq_iInf (engelerAppName F' X) (engelerAppName F X)]
    refine le_iInf fun q => ?_
    rw [le_himp_iff, memB_engelerAppName, memB_engelerAppName]
    refine le_inf (inf_le_of_right_le inf_le_left)
      ((engelerAppPred_congr_fun F' F X q).trans' <|
        le_inf (by rw [eqB_comm]; exact inf_le_left)
          (inf_le_of_right_le inf_le_right))
    rw [eqB_eq_subset (engelerAppName F X) (engelerAppName F' X)]
    exact le_inf hfwd hbwd

theorem engelerAppIdx_congr_fun [Nontrivial A] (F F' : AName.{u} A)
  (i : (engelerD (A := A)).idx) :
  eqB F F' <=
    eqB ((engelerD (A := A)).child (engelerAppIdx (A := A) F i))
      ((engelerD (A := A)).child (engelerAppIdx (A := A) F' i)) := by
  rw [engelerAppIdx_child, engelerAppIdx_child]
  exact (eqB_le_eqB_of_eqB_top
    (eqB_restrict_engelerAppName F ((engelerD (A := A)).child i))
    (eqB_restrict_engelerAppName F' ((engelerD (A := A)).child i)).trans'
    (engelerAppName_congr_fun F F' ((engelerD (A := A)).child i)))

theorem engelerAppRel_val_congr_fun [Nontrivial A] (F F' : AName.{u} A)
  (i j : (engelerD (A := A)).idx) :
  eqB F F' sqcap (engelerAppRel (A := A) F).val i j <=
    (engelerAppRel (A := A) F').val i j := by
  rw [engelerAppRel_val, engelerAppRel_val, oid_engelerD_eq, oid_engelerD_eq]
  refine (eqB_trans
    ((engelerD (A := A)).child (engelerAppIdx (A := A) F' i))
    ((engelerD (A := A)).child (engelerAppIdx (A := A) F i))
    ((engelerD (A := A)).child j)).trans' ?_
  refine le_inf ?_ inf_le_right
  have hFF' : eqB F F' <=
    eqB ((engelerD (A := A)).child (engelerAppIdx (A := A) F' i))
      ((engelerD (A := A)).child (engelerAppIdx (A := A) F i)) := by
    rw [eqB_comm
      ((engelerD (A := A)).child (engelerAppIdx (A := A) F' i))
      ((engelerD (A := A)).child (engelerAppIdx (A := A) F i))]
    exact engelerAppIdx_congr_fun (A := A) F F' i
  exact hFF'.trans' inf_le_left

theorem engelerAppGraph_congr [Nontrivial A] (F F' : AName.{u} A) :
  eqB F F' <=
    eqB (engelerAppGraph (A := A) F) (engelerAppGraph (A := A) F') := by
  have hfwd : eqB F F' <=
    subsetB (engelerAppGraph (A := A) F) (engelerAppGraph (A := A) F') := by
    unfold engelerAppGraph
    rw [relFunGraphName, subsetB_mk]
    refine le_iInf fun p => ?_
    rw [le_himp_iff]
    have hval := engelerAppRel_val_congr_fun (A := A) F F' p.1 p.2
    have hmem :
      (engelerAppRel (A := A) F').val p.1 p.2 <=
        memB (opairB ((engelerD (A := A)).child p.1)
          ((engelerD (A := A)).child p.2))
          (engelerAppGraph (A := A) F') := by
      rw [engelerAppGraph, memB_opairB_relFunGraphName]
    exact hmem.trans' hval

```



```

have hbwd : eqB F F' <=
  subsetB (engelerAppGraph (A := A) F') (engelerAppGraph (A := A) F) := by
  unfold engelerAppGraph
  rw [relFunGraphName, subsetB_mk]
  refine le_iInf fun p => ?_
  rw [le_himp_iff]
  have hval := engelerAppRel_val_congr_fun (A := A) F' F p.1 p.2
  have hmem :
    (engelerAppRel (A := A) F).val p.1 p.2 <=
      memB (opairB ((engelerD (A := A)).child p.1)
        ((engelerD (A := A)).child p.2))
        (engelerAppGraph (A := A) F) := by
    rw [engelerAppGraph, memB_opairB_relFunGraphName]
  exact hmem.trans' (hval.trans' <|
    le_inf (by rw [eqB_comm]; exact inf_le_left) inf_le_right)
  rw [eqB_eq_subset (engelerAppGraph (A := A) F) (engelerAppGraph (A := A) F')]
  exact le_inf hval hbwd

/-- Index-level `F |-> (X |-> F * X)` as a map `D -> C`. -/
noncomputable def engelerFunIdx [Nontrivial A]
  (i : (engelerD (A := A)).idx) : (engelerC (A := A)).idx :=
  restrictPowerIdx (engelerAppGraph (A := A) ((engelerD (A := A)).child i))
  (prodB (engelerD (A := A)) (engelerD (A := A)))

theorem engelerFunIdx_child [Nontrivial A]
  (i : (engelerD (A := A)).idx) :
  (engelerC (A := A)).child (engelerFunIdx (A := A) i) =
  restrictName (engelerAppGraph (A := A) ((engelerD (A := A)).child i))
  (prodB (engelerD (A := A)) (engelerD (A := A))) :=
  restrictPowerIdx_child _ _

theorem eqB_restrict_engelerAppGraph [Nontrivial A] (F : AName.{u} A) :
  eqB (engelerAppGraph (A := A) F)
  (restrictName (engelerAppGraph (A := A) F)
    (prodB (engelerD (A := A)) (engelerD (A := A)))) = top :=
  eqB_restrictName_of_subsetB _ _
  (isFunctionB_subset (isFunctionB_engelerAppGraph (A := A) F))

theorem engelerFunIdx_functional [Nontrivial A] :
  APoset.Functional (oid (engelerD (A := A))) (oid (engelerC (A := A)))
  (engelerFunIdx (A := A)) := by
  intro i i'
  rw [oid_engelerD_eq]
  have hmem (j : (engelerD (A := A)).idx) :
    memB ((engelerC (A := A)).child (engelerFunIdx (A := A) j))
    (engelerC (A := A)) = top := by
  rw [engelerFunIdx_child, memB_engelerC]
  exact top_unique
  ((isScottContinuousB_congr
    (engelerAppGraph (A := A) ((engelerD (A := A)).child j))
    (restrictName (engelerAppGraph (A := A) ((engelerD (A := A)).child j))
      (prodB (engelerD (A := A)) (engelerD (A := A))))
    (engelerD (A := A)) (engelerD (A := A))
    (engelerR (A := A)) (engelerR (A := A))).trans' <|
  le_inf (eqB_restrict_engelerAppGraph
    ((engelerD (A := A)).child j)).ge
    (le_top.trans (isScottContinuousB_engelerAppGraph
      ((engelerD (A := A)).child j)).ge))
  rw [oid_eq]
  refine le_inf (le_inf ?_ ?_) ?_
  * exact le_top.trans (hmem i).ge
  * exact le_top.trans (hmem i').ge
  * rw [engelerFunIdx_child, engelerFunIdx_child]

```

```

exact (eqB_le_eqB_of_eqB_top
  (eqB_restrict_engelerAppGraph ((engelerD (A := A)).child i))
  (eqB_restrict_engelerAppGraph ((engelerD (A := A)).child i'))).trans'
(engelerAppGraph_congr (A := A)
  ((engelerD (A := A)).child i)
  ((engelerD (A := A)).child i'))

noncomputable def engelerFunRel [Nontrivial A] :
  RelFun (oid (engelerD (A := A))) (oid (engelerC (A := A))) :=
  RelFun.ofFunctional _ _ (engelerFunIdx (A := A))
  (engelerFunIdx_functional (A := A))

/-- Internal graph of `F |-> (X |-> F * X)` -/
noncomputable def engelerFun [Nontrivial A] : AName.{u} A :=
  relFunGraphName (engelerD (A := A)) (engelerC (A := A))
  (engelerFunRel (A := A))

theorem isFunctionB_engelerFun [Nontrivial A] :
  isFunctionB (engelerFun (A := A))
  (engelerD (A := A)) (engelerC (A := A)) = top :=
  isFunctionB_relFunGraphName _ _ _

/-!
## Abstraction graph `Lam : C -> D`
-/

/-- Graph-level Engeler abstraction:
`lam(G) = {(K,q) | exists Y, (K,Y) in G /\ q in Y}` -/
noncomputable def engelerLamGraphPred (G x : AName.{u} A) : A :=
  bigcup K : Finset Nat, bigcup n : Nat, bigcup Y : AName.{u} A,
  eqB x (pairApplyB (A := A) K n) sqcap
  memB (opairB (check (A := A) (finsetPSet K)) Y) G sqcap
  memB (check (PSet.ofNat n)) Y

theorem engelerLamGraphPred_congr (G x x' : AName.{u} A) :
  eqB x x' sqcap engelerLamGraphPred G x <= engelerLamGraphPred G x' := by
  unfold engelerLamGraphPred
  rw [inf_iSup_eq]
  refine iSup_le fun K => ?_
  rw [inf_iSup_eq]
  refine iSup_le fun n => ?_
  rw [inf_iSup_eq]
  refine iSup_le fun Y =>
    le_iSup_of_le K (le_iSup_of_le n (le_iSup_of_le Y ?_))
  refine le_inf (le_inf ?heq (inf_le_of_right_le (inf_le_of_left_le inf_le_right)))
    (inf_le_of_right_le inf_le_right)
  exact (eqB_trans x' x (pairApplyB (A := A) K n)).trans' <|
    le_inf (by rw [eqB_comm]; exact inf_le_left)
    (inf_le_of_right_le (inf_le_of_left_le inf_le_left))

theorem engelerLamGraphPred_congr_fun (G G' x : AName.{u} A) :
  eqB G G' sqcap engelerLamGraphPred G x <= engelerLamGraphPred G' x := by
  unfold engelerLamGraphPred
  rw [inf_iSup_eq]
  refine iSup_le fun K => ?_
  rw [inf_iSup_eq]
  refine iSup_le fun n => ?_
  rw [inf_iSup_eq]
  refine iSup_le fun Y =>
    le_iSup_of_le K (le_iSup_of_le n (le_iSup_of_le Y ?_))
  refine le_inf (le_inf (inf_le_of_right_le (inf_le_of_left_le inf_le_left)) ?hG)
    (inf_le_of_right_le inf_le_right)
  exact (memB_eqB_right G (opairB (check (A := A) (finsetPSet K)) Y) G').trans' <|

```

```

le_inf (inf_le_of_right_le (inf_le_of_left_le inf_le_right)) inf_le_left

noncomputable def engelerLamGraphName (G : AName.{u} A) : AName.{u} A :=
  sepB (check (A := A) PSet.omega) (engelerLamGraphPred G)

theorem memB_engelerLamGraphName (G x : AName.{u} A) :
  memB x (engelerLamGraphName G) =
    memB x (check (A := A) PSet.omega) sqcap engelerLamGraphPred G x :=
  memB_sepB x (check (A := A) PSet.omega) (engelerLamGraphPred G)
  (engelerLamGraphPred_congr G)

theorem subsetB_engelerLamGraphName (G : AName.{u} A) :
  subsetB (engelerLamGraphName G) (check (A := A) PSet.omega) = top :=
  subsetB_sepB_omega _

theorem subsetB_engelerLamGraphName_checkExt [Nontrivial A]
  (G : AName.{u} A) :
  subsetB (engelerLamGraphName G) (checkExt (A := A) PSet.omega) = top := by
  rw [subsetB_eq_iInf]
  refine iInf_eq_top.mpr fun u => himp_eq_top_iff.mpr ?_
  have hcheck : memB u (engelerLamGraphName G) <=
    memB u (check (A := A) PSet.omega) :=
    (memB_of_subsetB u (engelerLamGraphName G)
      (check (A := A) PSet.omega)).trans' <|
    le_inf le_rfl (le_top.trans (subsetB_engelerLamGraphName G).ge)
  rwa [eqB_top_memB_right (eqB_check_checkExt (A := A) PSet.omega)] at hcheck

theorem eqB_restrict_engelerLamGraphName [Nontrivial A]
  (G : AName.{u} A) :
  eqB (engelerLamGraphName G)
    (restrictName (engelerLamGraphName G)
      (checkExt (A := A) PSet.omega)) = top :=
  top_unique
  ((subsetB_engelerLamGraphName_checkExt G).ge.trans
    (subsetB_le_eqB_restrict (engelerLamGraphName G)
      (checkExt (A := A) PSet.omega)))

theorem engelerLamGraphName_congr (G G' : AName.{u} A) :
  eqB G G' <= eqB (engelerLamGraphName G) (engelerLamGraphName G') := by
  have hfwd : eqB G G' <=
    subsetB (engelerLamGraphName G) (engelerLamGraphName G') := by
  rw [subsetB_eq_iInf (engelerLamGraphName G) (engelerLamGraphName G')]
  refine le_iInf fun q => ?_
  rw [le_himp_iff, memB_engelerLamGraphName, memB_engelerLamGraphName]
  refine le_inf (inf_le_of_right_le inf_le_left)
    ((engelerLamGraphPred_congr_fun G G' q).trans' <|
      le_inf inf_le_left (inf_le_of_right_le inf_le_right))
  have hbwd : eqB G G' <=
    subsetB (engelerLamGraphName G') (engelerLamGraphName G) := by
  rw [subsetB_eq_iInf (engelerLamGraphName G') (engelerLamGraphName G)]
  refine le_iInf fun q => ?_
  rw [le_himp_iff, memB_engelerLamGraphName, memB_engelerLamGraphName]
  refine le_inf (inf_le_of_right_le inf_le_left)
    ((engelerLamGraphPred_congr_fun G' G q).trans' <|
      le_inf (by rw [eqB_comm]; exact inf_le_left)
        (inf_le_of_right_le inf_le_right))
  rw [eqB_eq_subset (engelerLamGraphName G) (engelerLamGraphName G')]
  exact le_inf hfwd hbwd

noncomputable def engelerLamIdx [Nontrivial A]
  (j : (engelerC (A := A)).idx) : (engelerD (A := A)).idx :=

```

Lean 4 source (lines 1601–2000)

```

restrictPowerIdx (engelerLamGraphName ((engelerC (A := A)).child j))
  (checkExt (A := A) PSet.omega)

theorem engelerLamIdx_child [Nontrivial A]
  (j : (engelerC (A := A)).idx) :
  (engelerD (A := A)).child (engelerLamIdx (A := A) j) =
    restrictName (engelerLamGraphName ((engelerC (A := A)).child j))
      (checkExt (A := A) PSet.omega) :=
    restrictPowerIdx_child _ _

theorem engelerLamIdx_functional [Nontrivial A] :
  APoset.Functional (oid (engelerC (A := A))) (oid (engelerD (A := A)))
    (engelerLamIdx (A := A)) := by
  intro j j'
  rw [oid_eq, oid_engelerD_eq, engelerLamIdx_child, engelerLamIdx_child]
  refine (eqB_le_eqB_of_eqB_top
    (eqB_restrict_engelerLamGraphName ((engelerC (A := A)).child j))
    (eqB_restrict_engelerLamGraphName ((engelerC (A := A)).child j'))).trans'
    ((engelerLamGraphName_congr ((engelerC (A := A)).child j)
      (engelerC (A := A).child j')).trans' inf_le_right)

noncomputable def engelerLamRel [Nontrivial A] :
  RelFun (oid (engelerC (A := A))) (oid (engelerD (A := A))) :=
  RelFun.ofFunctional _ _ (engelerLamIdx (A := A))
    (engelerLamIdx_functional (A := A))

/-- Internal graph of Engeler `lam` on a continuous self-map.
    Named `engelerLamB` to avoid clashing with the ground `engelerLam`. -/
noncomputable def engelerLamB [Nontrivial A] : AName.{u} A :=
  relFunGraphName (engelerC (A := A)) (engelerD (A := A))
    (engelerLamRel (A := A))

theorem isFunctionB_engelerLamB [Nontrivial A] :
  isFunctionB (engelerLamB (A := A))
    (engelerC (A := A)) (engelerD (A := A)) = top :=
  isFunctionB_relFunGraphName _ _ _

theorem subsetB_engelerAppName_mono_fun (F F' X : AName.{u} A) :
  subsetB F F' <=
    subsetB (engelerAppName F X) (engelerAppName F' X) := by
  rw [subsetB_eq_iInf (engelerAppName F X) (engelerAppName F' X)]
  refine le_iInf fun q => ?_
  rw [le_himp_iff, memB_engelerAppName, memB_engelerAppName]
  refine le_inf (inf_le_of_right_le inf_le_left) ?_
  have happ : subsetB F F' sqcap engelerAppPred F X q <=
    engelerAppPred F' X q := by
    unfold engelerAppPred
    rw [inf_iSup_eq]
    refine iSup_le fun K => ?_
    rw [inf_iSup_eq]
    refine iSup_le fun n => le_iSup_of_le K (le_iSup_of_le n ?_)
    refine le_inf (le_inf (inf_le_of_right_le (inf_le_of_left_le inf_le_left))
      (inf_le_of_right_le (inf_le_of_left_le inf_le_right))) ?_
    exact (memB_of_subsetB (pairApplyB (A := A) K n) F F').trans' <|
      le_inf (inf_le_of_right_le inf_le_right) inf_le_left
    exact happ.trans' (le_inf inf_le_left (inf_le_of_right_le inf_le_right))

theorem engelerFunRel_val [Nontrivial A]
  (i : (engelerD (A := A)).idx) (j : (engelerC (A := A)).idx) :
  (engelerFunRel (A := A)).val i j =
    (oid (engelerC (A := A))).eq (engelerFunIdx (A := A) i) j := by
  change (oid (engelerD (A := A))).eps i sqcap
    (oid (engelerC (A := A))).eq (engelerFunIdx (A := A) i) j = _

```

```

rw [oid_engelerD_eps, top_inf_eq]

theorem memB_opairB_engelerFun [Nontrivial A] (F G : AName.{u} A) :
  memB (opairB F G) (engelerFun (A := A)) =
    bigcup i : (engelerD (A := A)).idx, bigcup j : (engelerC (A := A)).idx,
    eqB F ((engelerD (A := A)).child i) sqcap
    eqB G ((engelerC (A := A)).child j) sqcap
    (oid (engelerC (A := A))).eq (engelerFunIdx (A := A) i) j := by
  unfold engelerFun
  rw [relFunGraphName, memB_mk]
  refine le_antisymm ?le ?ge
  * refine iSup_le fun p => ?_
    rw [eqB_opairB, engelerFunRel_val]
    exact le_iSup_of_le p.1 (le_iSup_of_le p.2 le_rfl)
  * refine iSup_le fun i => iSup_le fun j => ?_
    refine le_iSup_of_le (i, j) ?_
    rw [eqB_opairB, engelerFunRel_val]

theorem engelerFun_mem_le_eqB [Nontrivial A] (F G : AName.{u} A) :
  memB (opairB F G) (engelerFun (A := A)) <=
    memB F (engelerD (A := A)) sqcap memB G (engelerC (A := A)) sqcap
    eqB G (engelerAppGraph (A := A) F) := by
  have hprod : memB (opairB F G) (engelerFun (A := A)) <=
    memB F (engelerD (A := A)) sqcap memB G (engelerC (A := A)) := by
    have hsub := isFunctionB_subset (isFunctionB_engelerFun (A := A))
    have hm := memB_of_subsetB (opairB F G) (engelerFun (A := A))
    (prodB (engelerD (A := A)) (engelerC (A := A)))
    rw [hsub, inf_top_eq] at hm
    rwa [memB_opairB_prodB] at hm
  refine le_inf hprod ?heq
  rw [memB_opairB_engelerFun]
  refine iSup_le fun i => iSup_le fun j => ?_
  rw [oid_eq, engelerFunIdx_child]
  let t :=
    eqB F ((engelerD (A := A)).child i) sqcap
    eqB G ((engelerC (A := A)).child j) sqcap
    (memB ((engelerC (A := A)).child (engelerFunIdx (A := A) i))
    (engelerC (A := A)) sqcap
    memB ((engelerC (A := A)).child j) (engelerC (A := A)) sqcap
    eqB ((engelerC (A := A)).child (engelerFunIdx (A := A) i))
    ((engelerC (A := A)).child j))
  change t <= eqB G (engelerAppGraph (A := A) F)
  have hGj : t <= eqB G ((engelerC (A := A)).child j) :=
    inf_le_left.trans inf_le_right
  have hjr : t <=
    eqB ((engelerC (A := A)).child j)
    ((engelerC (A := A)).child (engelerFunIdx (A := A) i)) := by
    rw [eqB_comm, engelerFunIdx_child]
    exact inf_le_right.trans inf_le_right
  have hGr : t <=
    eqB G ((engelerC (A := A)).child (engelerFunIdx (A := A) i)) :=
    (eqB_trans G ((engelerC (A := A)).child j)
    ((engelerC (A := A)).child (engelerFunIdx (A := A) i))).trans'
    (le_inf hGj (by rw [engelerFunIdx_child] at hjr; exact hjr))
  have hra : eqB
    ((engelerC (A := A)).child (engelerFunIdx (A := A) i))
    (engelerAppGraph (A := A) ((engelerD (A := A)).child i)) = top := by
    rw [engelerFunIdx_child, eqB_comm]
    exact eqB_restrict_engelerAppGraph ((engelerD (A := A)).child i)
  have hGa : t <=
    eqB G (engelerAppGraph (A := A) ((engelerD (A := A)).child i)) :=
    (eqB_trans G
    ((engelerC (A := A)).child (engelerFunIdx (A := A) i))

```

```

      (engelerAppGraph (A := A) ((engelerD (A := A)).child i))).trans' <|
    le_inf hGr (le_top.trans hra.ge)
  have hFi : t <= eqB ((engelerD (A := A)).child i) F := by
    rw [eqB_comm]
    exact inf_le_left.trans inf_le_left
  exact (eqB_trans G
    (engelerAppGraph (A := A) ((engelerD (A := A)).child i))
    (engelerAppGraph (A := A) F)).trans' <|
  le_inf hGa
    ((engelerAppGraph_congr (A := A)
      ((engelerD (A := A)).child i) F).trans' hFi)

theorem pointwiseLeB_engelerAppGraph_of_subset [Nontrivial A]
  (F F' : AName.{u} A) :
  subsetB F F' <=
    pointwiseLeB (engelerAppGraph (A := A) F)
      (engelerAppGraph (A := A) F')
      (engelerD (A := A)) (engelerR (A := A)) := by
  unfold pointwiseLeB
  refine le_iInf fun x => le_iInf fun y => le_iInf fun z => ?_
  rw [le_himp_iff]
  let t :=
    subsetB F F' sqcap
      (memB x (engelerD (A := A)) sqcap
        memB (opairB x y) (engelerAppGraph (A := A) F) sqcap
        memB (opairB x z) (engelerAppGraph (A := A) F'))
  change t <= relB (engelerR (A := A)) y z
  have hyall : t <=
    memB x (engelerD (A := A)) sqcap memB y (engelerD (A := A)) sqcap
    eqB y (engelerAppName F x) :=
    (engelerAppGraph_mem_le_eqB (A := A) F x y).trans'
    (inf_le_right.trans (inf_le_left.trans inf_le_right))
  have hzall : t <=
    memB x (engelerD (A := A)) sqcap memB z (engelerD (A := A)) sqcap
    eqB z (engelerAppName F' x) :=
    (engelerAppGraph_mem_le_eqB (A := A) F' x z).trans'
    (inf_le_right.trans inf_le_right)
  have hyeq : t <= eqB y (engelerAppName F x) :=
    hyall.trans inf_le_right
  have hzeq : t <= eqB z (engelerAppName F' x) :=
    hzall.trans inf_le_right
  have hyD : t <= memB y (engelerD (A := A)) :=
    hyall.trans (inf_le_left.trans inf_le_right)
  have hzD : t <= memB z (engelerD (A := A)) :=
    hzall.trans (inf_le_left.trans inf_le_right)
  have happ : t <= subsetB (engelerAppName F x) (engelerAppName F' x) :=
    (subsetB_engelerAppName_mono_fun F F' x).trans' inf_le_left
  have hsub : t <= subsetB y z :=
    (AName.subsetB_trans y (engelerAppName F x) z).trans' <|
    le_inf ((eqB_le_subsetB y (engelerAppName F x)).trans' hyeq) <|
    (AName.subsetB_trans (engelerAppName F x) (engelerAppName F' x) z).trans' <|
    le_inf happ
    ((eqB_le_subsetB (engelerAppName F' x) z).trans' <| by
      rw [eqB_comm]; exact hzeq)
  rw [relB_engelerR]
  exact le_inf (le_inf hyD hzD) hsub

theorem engelerFun_mono [Nontrivial A] (F F' G G' : AName.{u} A) :
  memB (opairB F G) (engelerFun (A := A)) sqcap
    memB (opairB F' G') (engelerFun (A := A)) sqcap
    relB (engelerR (A := A)) F F' <=
    relB (engelerQ (A := A)) G G' := by
  let t :=

```

```

    memB (opairB F G) (engelerFun (A := A)) sqcap
    memB (opairB F' G') (engelerFun (A := A)) sqcap
    relB (engelerR (A := A)) F F'
have hGall : t <=
  memB F (engelerD (A := A)) sqcap memB G (engelerC (A := A)) sqcap
  eqB G (engelerAppGraph (A := A) F) :=
  (engelerFun_mem_le_eqB (A := A) F G).trans'
  (inf_le_left.trans inf_le_left)
have hG'all : t <=
  memB F' (engelerD (A := A)) sqcap memB G' (engelerC (A := A)) sqcap
  eqB G' (engelerAppGraph (A := A) F') :=
  (engelerFun_mem_le_eqB (A := A) F' G').trans'
  (inf_le_left.trans inf_le_right)
have hGC : t <= memB G (engelerC (A := A)) :=
  hGall.trans (inf_le_left.trans inf_le_right)
have hG'C : t <= memB G' (engelerC (A := A)) :=
  hG'all.trans (inf_le_left.trans inf_le_right)
have hGeq : t <= eqB G (engelerAppGraph (A := A) F) :=
  hGall.trans inf_le_right
have hG'eq : t <= eqB G' (engelerAppGraph (A := A) F') :=
  hG'all.trans inf_le_right
have hFF' : t <= subsetB F F' := by
  have hrel : t <= relB (engelerR (A := A)) F F' := inf_le_right
  rw [relB_engelerR] at hrel
  exact hrel.trans inf_le_right
have hpw : t <=
  pointwiseLeB (engelerAppGraph (A := A) F)
  (engelerAppGraph (A := A) F')
  (engelerD (A := A)) (engelerR (A := A)) :=
  (pointwiseLeB_engelerAppGraph_of_subset (A := A) F F').trans' hFF'
have hpwGG' : t <=
  pointwiseLeB G G' (engelerD (A := A)) (engelerR (A := A)) :=
  (pointwiseLeB_congr (engelerAppGraph (A := A) F) G
  (engelerAppGraph (A := A) F') G'
  (engelerD (A := A)) (engelerR (A := A))).trans' <|
  le_inf (le_inf (by rw [eqB_comm]; exact hGeq)
  (by rw [eqB_comm]; exact hG'eq)) hpw
change t <= relB (engelerQ (A := A)) G G'
rw [relB_engelerQ]
exact le_inf (le_inf hGC hG'C) hpwGG'

theorem engelerFun_mapsToSup_upper [Nontrivial A]
  (S x y F G : AName.{u} A) :
  isDirectedRelB S (engelerD (A := A)) (engelerR (A := A)) sqcap
  isSupRelB x S (engelerR (A := A)) sqcap
  memB (opairB x y) (engelerFun (A := A)) sqcap
  memB F S sqcap
  memB (opairB F G) (engelerFun (A := A)) <=
  relB (engelerQ (A := A)) G y := by
let t :=
  isDirectedRelB S (engelerD (A := A)) (engelerR (A := A)) sqcap
  isSupRelB x S (engelerR (A := A)) sqcap
  memB (opairB x y) (engelerFun (A := A)) sqcap
  memB F S sqcap
  memB (opairB F G) (engelerFun (A := A))
have hsup : t <= isSupRelB x S (engelerR (A := A)) :=
  inf_le_left.trans (inf_le_left.trans (inf_le_left.trans inf_le_right))
have hup : t <= isUpperBoundRelB x S (engelerR (A := A)) :=
  hsup.trans inf_le_left
have hFx : t <= relB (engelerR (A := A)) F x :=
  (isUpperBoundRelB_apply x S (engelerR (A := A)) F).trans' <|
  le_inf hup (inf_le_left.trans inf_le_right)
have hFG : t <= memB (opairB F G) (engelerFun (A := A)) := inf_le_right

```

```

have hxy : t <= memB (opairB x y) (engelerFun (A := A)) :=
  inf_le_left.trans (inf_le_left.trans inf_le_right)
exact (engelerFun_mono (A := A) F x G y).trans' <|
  le_inf (le_inf hFG hxy) hFx

theorem le_memB_opairB_engelerAppGraph [Nontrivial A]
  (F x y : AName.{u} A) :
  memB x (engelerD (A := A)) sqcap memB y (engelerD (A := A)) sqcap
  eqB y (engelerAppName F x) <=
  memB (opairB x y) (engelerAppGraph (A := A) F) := by
let i : (engelerD (A := A)).idx :=
  restrictPowerIdx x (checkExt (A := A) PSet.omega)
have hx : memB x (engelerD (A := A)) <=
  eqB x ((engelerD (A := A)).child i) := by
  have hmem : memB x (engelerD (A := A)) =
    subsetB x (checkExt (A := A) PSet.omega) := by
    unfold engelerD
    exact memB_powerB x _
  have hchild : (engelerD (A := A)).child i =
    restrictName x (checkExt (A := A) PSet.omega) := by
    unfold engelerD
    exact restrictPowerIdx_child x _
  rw [hmem, hchild]
  exact subsetB_le_eqB_restrict x (checkExt (A := A) PSet.omega)
have hxi : memB x (engelerD (A := A)) <=
  eqB ((engelerD (A := A)).child i) x := by
  rw [eqB_comm]
  exact hx
have happ : memB x (engelerD (A := A)) <=
  eqB (engelerAppName F ((engelerD (A := A)).child i))
  (engelerAppName F x) :=
  (engelerAppName_congr_arg F ((engelerD (A := A)).child i) x).trans' hxi
have hrestr : eqB
  ((engelerD (A := A)).child (engelerAppIdx (A := A) F i))
  (engelerAppName F ((engelerD (A := A)).child i)) = top := by
  have h := eqB_restrict_engelerAppName F ((engelerD (A := A)).child i)
  have hchild := engelerAppIdx_child (A := A) F i
  rw [hchild, eqB_comm]
  exact h
rw [memB_opairB_engelerAppGraph]
refine le_iSup_of_le i (le_iSup_of_le (engelerAppIdx (A := A) F i) ?_)
rw [oid_engelerD_eq]
refine le_inf (le_inf (hx.trans' (inf_le_of_left_le inf_le_left)) ?hy)
  (le_top.trans (eqB_self _).ge)
refine (eqB_trans y (engelerAppName F x)
  ((engelerD (A := A)).child (engelerAppIdx (A := A) F i))).trans' ?_
refine le_inf inf_le_right ?_
refine (eqB_trans (engelerAppName F x)
  (engelerAppName F ((engelerD (A := A)).child i))
  ((engelerD (A := A)).child (engelerAppIdx (A := A) F i))).trans' ?_
refine le_inf ?_ (le_top.trans (by rw [eqB_comm]; exact hrestr.ge))
have hcomm : eqB (engelerAppName F ((engelerD (A := A)).child i))
  (engelerAppName F x) =
  eqB (engelerAppName F x)
  (engelerAppName F ((engelerD (A := A)).child i)) :=
  eqB_comm _ _
exact (hcomm |> happ).trans' (inf_le_of_left_le inf_le_left)

theorem le_memB_opairB_engelerFun [Nontrivial A]
  (F G : AName.{u} A) :
  memB F (engelerD (A := A)) sqcap memB G (engelerC (A := A)) sqcap
  eqB G (engelerAppGraph (A := A) F) <=
  memB (opairB F G) (engelerFun (A := A)) := by

```



```

let i : (engelerD (A := A)).idx :=
  restrictPowerIdx F (checkExt (A := A) PSet.omega)
have hF : memB F (engelerD (A := A)) <=
  eqB F ((engelerD (A := A)).child i) := by
  have hmem : memB F (engelerD (A := A)) =
    subsetB F (checkExt (A := A) PSet.omega) := by
    unfold engelerD
    exact memB_powerB F _
  have hchild : (engelerD (A := A)).child i =
    restrictName F (checkExt (A := A) PSet.omega) := by
    unfold engelerD
    exact restrictPowerIdx_child F _
  rw [hmem, hchild]
  exact subsetB_le_eqB_restrict F (checkExt (A := A) PSet.omega)
have hFi : memB F (engelerD (A := A)) <=
  eqB ((engelerD (A := A)).child i) F := by
  rw [eqB_comm]
  exact hF
have happ : memB F (engelerD (A := A)) <=
  eqB (engelerAppGraph (A := A) ((engelerD (A := A)).child i))
    (engelerAppGraph (A := A) F) :=
  (engelerAppGraph_congr (A := A) ((engelerD (A := A)).child i) F).trans'
    hFi
have hrestr : eqB
  ((engelerC (A := A)).child (engelerFunIdx (A := A) i))
  (engelerAppGraph (A := A) ((engelerD (A := A)).child i)) = top := by
  have h := eqB_restrict_engelerAppGraph ((engelerD (A := A)).child i)
  have hchild := engelerFunIdx_child (A := A) i
  rw [hchild, eqB_comm]
  exact h
have hmemC : memB
  ((engelerC (A := A)).child (engelerFunIdx (A := A) i))
  (engelerC (A := A)) = top := by
  rw [engelerFunIdx_child, memB_engelerC]
  exact top_unique
  ((isScottContinuousB_congr
    (engelerAppGraph (A := A) ((engelerD (A := A)).child i))
    (restrictName (engelerAppGraph (A := A) ((engelerD (A := A)).child i))
      (prodB (engelerD (A := A)) (engelerD (A := A))))
    (engelerD (A := A)) (engelerD (A := A))
    (engelerR (A := A)) (engelerR (A := A))).trans' <|
  le_inf (by rw [eqB_comm]; exact hrestr.ge)
  (le_top.trans (isScottContinuousB_engelerAppGraph
    ((engelerD (A := A)).child i)).ge))
  rw [memB_opairB_engelerFun]
  refine le_iSup_of_le i (le_iSup_of_le (engelerFunIdx (A := A) i) ?_)
  rw [oid_eq]
  refine le_inf (le_inf (hF.trans' (inf_le_of_left_le inf_le_left)) ?hG)
    (le_inf (le_inf (le_top.trans hmemC.ge) (le_top.trans hmemC.ge))
      (le_top.trans (eqB_self _).ge))
  refine (eqB_trans G (engelerAppGraph (A := A) F)
    ((engelerC (A := A)).child (engelerFunIdx (A := A) i))).trans' ?_
  refine le_inf inf_le_right ?_
  refine (eqB_trans (engelerAppGraph (A := A) F)
    (engelerAppGraph (A := A) ((engelerD (A := A)).child i))
    ((engelerC (A := A)).child (engelerFunIdx (A := A) i))).trans' ?_
  refine le_inf ?_ (le_top.trans (by rw [eqB_comm]; exact hrestr.ge))
have hcomm : eqB (engelerAppGraph (A := A) ((engelerD (A := A)).child i))
  (engelerAppGraph (A := A) F) =
  eqB (engelerAppGraph (A := A) F)
    (engelerAppGraph (A := A) ((engelerD (A := A)).child i)) :=
  eqB_comm _ _
exact (hcomm |> happ).trans' (inf_le_of_left_le inf_le_left)

```

```

theorem engelerAppPred_of_sUnion (S x X q : AName.{u} A) :
  eqB x (sUnionB S) sqcap engelerAppPred x X q <=
    bigcup F, memB F S sqcap engelerAppPred F X q := by
  unfold engelerAppPred
  rw [inf_iSup_eq]
  refine iSup_le fun K => ?_
  rw [inf_iSup_eq]
  refine iSup_le fun n => ?_
  have hmem : eqB x (sUnionB S) sqcap memB (pairApplyB (A := A) K n) x <=
    memB (pairApplyB (A := A) K n) (sUnionB S) :=
    (memB_eqB_right x (pairApplyB (A := A) K n) (sUnionB S)).trans' <|
    le_inf inf_le_right inf_le_left
  have hpair :
    eqB x (sUnionB S) sqcap
      (eqB q (check (PSet.ofNat n)) sqcap
        subsetB (check (A := A) (finsetPSet K)) X sqcap
        memB (pairApplyB (A := A) K n) x) <=
    existsMemB (pairApplyB (A := A) K n) S sqcap
      (eqB q (check (PSet.ofNat n)) sqcap
        subsetB (check (A := A) (finsetPSet K)) X) :=
    le_inf

```

Lean 4 source (lines 2001–2400)

```

    ((hmem.trans (memB_sUnionB (pairApplyB (A := A) K n) S).le).trans' <|
      le_inf inf_le_left (inf_le_right.trans inf_le_right))
    (inf_le_right.trans inf_le_left)
  refine hpair.trans ?_
  unfold existsMemB
  rw [inf_comm, inf_iSup_eq]
  refine iSup_le fun F => le_iSup_of_le F ?_
  refine le_inf (inf_le_right.trans inf_le_left)
    ((engelerAppPred_of_pair F X q K n).trans' <|
      le_inf (le_inf (inf_le_left.trans inf_le_left)
        (inf_le_left.trans inf_le_right))
        (inf_le_right.trans inf_le_right))

theorem engelerFun_upper_le_memB_u [Nontrivial A]
  (S x y u : AName.{u} A) :
  isDirectedRelB S (engelerD (A := A)) (engelerR (A := A)) sqcap
    isSupRelB x S (engelerR (A := A)) sqcap
    memB (opairB x y) (engelerFun (A := A)) sqcap
    (? F : AName.{u} A, ? G : AName.{u} A,
      memB F S sqcap memB (opairB F G) (engelerFun (A := A)) ?
        relB (engelerQ (A := A)) G u) <=
    memB u (engelerC (A := A)) := by
  let t :=
    isDirectedRelB S (engelerD (A := A)) (engelerR (A := A)) sqcap
    isSupRelB x S (engelerR (A := A)) sqcap
    memB (opairB x y) (engelerFun (A := A)) sqcap
    (? F : AName.{u} A, ? G : AName.{u} A,
      memB F S sqcap memB (opairB F G) (engelerFun (A := A)) ?
        relB (engelerQ (A := A)) G u)
  have hdir : t <=
    isDirectedRelB S (engelerD (A := A)) (engelerR (A := A)) :=
    inf_le_left.trans (inf_le_left.trans inf_le_left)
  have hne : t <= bigcup F, memB F S :=
    (isDirectedRelB_le_nonempty S (engelerD (A := A))
      (engelerR (A := A))).trans' hdir
  have hSD : t <= subsetB S (engelerD (A := A)) :=
    (isDirectedRelB_le_subsetB S (engelerD (A := A))
      (engelerR (A := A))).trans' hdir
  have hupper : t <=

```

```

    (? F : AName.{u} A, ? G : AName.{u} A,
      memB F S sqcap memB (opairB F G) (engelerFun (A := A)) ?
      relB (engelerQ (A := A)) G u) :=
  inf_le_right
have ht : t = t sqcap bigcup F, memB F S := (inf_eq_left.mpr hne).symm
change t <= memB u (engelerC (A := A))
rw [ht, inf_iSup_eq]
refine iSup_le fun F => ?_
have hFD : t sqcap memB F S <= memB F (engelerD (A := A)) :=
  (subsetB_le_memB_of_mem S (engelerD (A := A)) F).trans' <|
  le_inf (hSD.trans' inf_le_left) inf_le_right
have htot : t sqcap memB F S <=
  bigcup G, memB (opairB F G) (engelerFun (A := A)) := by
  have hT := isFunctionB_total (isFunctionB_engelerFun (A := A))
  have happ := isTotalB_apply (engelerFun (A := A))
  (engelerD (A := A)) F
  refine happ.trans' ?_
  rw [hT, top_inf_eq]
  exact hFD
have htw : t sqcap memB F S =
  (t sqcap memB F S) sqcap bigcup G, memB (opairB F G) (engelerFun (A := A)) :=
  (inf_eq_left.mpr htot).symm
rw [htw, inf_iSup_eq]
refine iSup_le fun G => ?_
have hx := iInf_le (fun F' : AName.{u} A =>
  ? G' : AName.{u} A,
    memB F' S sqcap memB (opairB F' G') (engelerFun (A := A)) ?
    relB (engelerQ (A := A)) G' u) F
have hG := (iInf_le (fun G' : AName.{u} A =>
  memB F S sqcap memB (opairB F G') (engelerFun (A := A)) ?
  relB (engelerQ (A := A)) G' u) G).trans' hx
have hrel :
  (t sqcap memB F S) sqcap memB (opairB F G) (engelerFun (A := A)) <=
  relB (engelerQ (A := A)) G u :=
  (le_himp_iff.mpr hG).trans' <|
  le_inf (hupper.trans' (inf_le_left.trans inf_le_left))
  (le_inf (inf_le_left.trans inf_le_right) inf_le_right)
rw [relB_engelerQ] at hrel
exact hrel.trans (inf_le_left.trans inf_le_right)

theorem memB_engelerAppName_le_D [Nontrivial A]
  (F X : AName.{u} A) :
  memB (engelerAppName F X) (engelerD (A := A)) = top := by
  unfold engelerD
  rw [memB_powerB]
  exact subsetB_engelerAppName_checkExt F X

theorem engelerFun_mapsToSup_least_pointwise [Nontrivial A]
  (S x y u : AName.{u} A) :
  isDirectedRelB S (engelerD (A := A)) (engelerR (A := A)) sqcap
  isSupRelB x S (engelerR (A := A)) sqcap
  memB (opairB x y) (engelerFun (A := A)) sqcap
  (? F : AName.{u} A, ? G : AName.{u} A,
    memB F S sqcap memB (opairB F G) (engelerFun (A := A)) ?
    relB (engelerQ (A := A)) G u) <=
  pointwiseLeB y u (engelerD (A := A)) (engelerR (A := A)) := by
  let t :=
    isDirectedRelB S (engelerD (A := A)) (engelerR (A := A)) sqcap
    isSupRelB x S (engelerR (A := A)) sqcap
    memB (opairB x y) (engelerFun (A := A)) sqcap
    (? F : AName.{u} A, ? G : AName.{u} A,
      memB F S sqcap memB (opairB F G) (engelerFun (A := A)) ?
      relB (engelerQ (A := A)) G u)

```

```

have hyeq : t <= eqB y (engelerAppGraph (A := A) x) :=
  (engelerFun_mem_le_eqB (A := A) x y).trans'
  (inf_le_left.trans inf_le_right) |>.trans inf_le_right
have hdir : t <=
  isDirectedRelB S (engelerD (A := A)) (engelerR (A := A)) :=
  inf_le_left.trans (inf_le_left.trans inf_le_left)
have hsup : t <= isSupRelB x S (engelerR (A := A)) :=
  inf_le_left.trans (inf_le_left.trans inf_le_right)
have hxs : t <= eqB x (sUnionB S) :=
  (isDirectedRelB_engeler_eqB_sUnion S x).trans'
  (le_inf hdir hsup)
have hSD : t <= subsetB S (engelerD (A := A)) :=
  (isDirectedRelB_le_subsetB S (engelerD (A := A))
    (engelerR (A := A))).trans' hdir
have hupper : t <=
  (? F : AName.{u} A, ? G : AName.{u} A,
    memB F S sqcap memB (opairB F G) (engelerFun (A := A)) ?
    relB (engelerQ (A := A)) G u) :=
  inf_le_right
unfold pointwiseLeB
refine le_iInf fun X => le_iInf fun Y => le_iInf fun Z => ?_
rw [le_himp_iff]
let s :=
  t sqcap (memB X (engelerD (A := A)) sqcap
    memB (opairB X Y) y sqcap memB (opairB X Z) u)
change s <= relB (engelerR (A := A)) Y Z
have hXy : s <= memB (opairB X Y) (engelerAppGraph (A := A) x) :=
  (memB_opairB_eqB_left y (engelerAppGraph (A := A) x) X Y).trans' <|
  le_inf (hyeq.trans' inf_le_left)
  (inf_le_right.trans (inf_le_left.trans inf_le_right))
have hYeq : s <= eqB Y (engelerAppName x X) :=
  (engelerAppGraph_mem_le_eqB (A := A) x X Y).trans' hXy |>.trans
  inf_le_right
have hYD : s <= memB Y (engelerD (A := A)) :=
  (engelerAppGraph_mem_le_eqB (A := A) x X Y).trans' hXy |>.trans
  (inf_le_left.trans inf_le_right)
have hXD : s <= memB X (engelerD (A := A)) :=
  inf_le_right.trans (inf_le_left.trans inf_le_left)
have hZu : s <= memB (opairB X Z) u :=
  inf_le_right.trans inf_le_right
have happZ : s <= subsetB (engelerAppName x X) Z := by
  rw [subsetB_eq_iInf (engelerAppName x X) Z]
  refine le_iInf fun q => ?_
  rw [le_himp_iff, memB_engelerAppName]
  let r :=
    s sqcap (memB q (check (A := A) PSet.omega) sqcap engelerAppPred x X q)
  change r <= memB q Z
  have hland : r <= bigcup F, memB F S sqcap engelerAppPred F X q :=
    (engelerAppPred_of_sUnion S x X q).trans' <|
    le_inf (hxs.trans' (inf_le_left.trans inf_le_left))
    (inf_le_right.trans inf_le_right)
  have hq? : r <= memB q (check (A := A) PSet.omega) :=
    inf_le_right.trans inf_le_left
  have heq : r = r sqcap bigcup F, memB F S sqcap engelerAppPred F X q :=
    (inf_eq_left.mpr hland).symm
  rw [heq, inf_iSup_eq]
  refine iSup_le fun F => ?_
  have hFS : r sqcap (memB F S sqcap engelerAppPred F X q) <= memB F S :=
    inf_le_right.trans inf_le_left
  have hpred : r sqcap (memB F S sqcap engelerAppPred F X q) <=
    engelerAppPred F X q :=
    inf_le_right.trans inf_le_right
  have hr : r sqcap (memB F S sqcap engelerAppPred F X q) <= r := inf_le_left

```

```

have hrs : r sqcap (memB F S sqcap engelerAppPred F X q) <= s :=
  hr.trans inf_le_left
have hrt : r sqcap (memB F S sqcap engelerAppPred F X q) <= t :=
  hrs.trans inf_le_left
have hFD : r sqcap (memB F S sqcap engelerAppPred F X q) <=
  memB F (engelerD (A := A)) :=
  (subsetB_le_memB_of_mem S (engelerD (A := A)) F).trans' <|
  le_inf (hSD.trans' hrt) hFS
have hXDr : r sqcap (memB F S sqcap engelerAppPred F X q) <=
  memB X (engelerD (A := A)) :=
  hXD.trans' hrs
have happq : r sqcap (memB F S sqcap engelerAppPred F X q) <=
  memB q (engelerAppName F X) := by
  rw [memB_engelerAppName]
  exact le_inf (hq?.trans' hr) hpred
have hedge : r sqcap (memB F S sqcap engelerAppPred F X q) <=
  memB (opairB X (engelerAppName F X))
  (engelerAppGraph (A := A) F) :=
  (le_memB_opairB_engelerAppGraph (A := A) F X
  (engelerAppName F X)).trans' <|
  le_inf (le_inf hXDr
    (le_top.trans (memB_engelerAppName_le_D (A := A) F X).ge))
    (le_top.trans (eqB_self _).ge)
have hGC : memB (engelerAppGraph (A := A) F) (engelerC (A := A)) = top :=
  memB_engelerC_engelerAppGraph (A := A) F
have hFunFG : r sqcap (memB F S sqcap engelerAppPred F X q) <=
  memB (opairB F (engelerAppGraph (A := A) F))
  (engelerFun (A := A)) :=
  (le_memB_opairB_engelerFun (A := A) F
  (engelerAppGraph (A := A) F)).trans' <|
  le_inf (le_inf hFD (le_top.trans hGC.ge))
  (le_top.trans (eqB_self _).ge)
have hx := iInf_le (fun F' : AName.{u} A =>
  ? G' : AName.{u} A,
  memB F' S sqcap memB (opairB F' G') (engelerFun (A := A)) ?
  relB (engelerQ (A := A)) G' u) F
have hG := (iInf_le (fun G' : AName.{u} A =>
  memB F S sqcap memB (opairB F G') (engelerFun (A := A)) ?
  relB (engelerQ (A := A)) G' u)
  (engelerAppGraph (A := A) F)).trans' hx
have hQu : r sqcap (memB F S sqcap engelerAppPred F X q) <=
  relB (engelerQ (A := A)) (engelerAppGraph (A := A) F) u :=
  (le_himp_iff.mp hG).trans' <|
  le_inf (hupper.trans' hrt) (le_inf hFS hFunFG)
have hpw : r sqcap (memB F S sqcap engelerAppPred F X q) <=
  pointwiseLeB (engelerAppGraph (A := A) F) u
  (engelerD (A := A)) (engelerR (A := A)) := by
  have hQu' := hQu
  rw [relB_engelerQ] at hQu'
  exact hQu'.trans inf_le_right
have hrelXZ : r sqcap (memB F S sqcap engelerAppPred F X q) <=
  relB (engelerR (A := A)) (engelerAppName F X) Z := by
  have hp := iInf_le (fun X' : AName.{u} A =>
    ? Y' : AName.{u} A, ? Z' : AName.{u} A,
    memB X' (engelerD (A := A)) sqcap
    memB (opairB X' Y') (engelerAppGraph (A := A) F) sqcap
    memB (opairB X' Z') u ?
    relB (engelerR (A := A)) Y' Z') X
  have hpY := (iInf_le (fun Y' : AName.{u} A =>
    ? Z' : AName.{u} A,
    memB X (engelerD (A := A)) sqcap
    memB (opairB X Y') (engelerAppGraph (A := A) F) sqcap
    memB (opairB X Z') u ?

```

```

        relB (engelerR (A := A)) Y' Z')
      (engelerAppName F X)).trans' hp
    have hpZ := (iInf_le (fun Z' : AName.{u} A =>
      memB X (engelerD (A := A)) sqcap
      memB (opairB X (engelerAppName F X))
      (engelerAppGraph (A := A) F) sqcap
      memB (opairB X Z') u ?
      relB (engelerR (A := A)) (engelerAppName F X) Z')
      Z).trans' hpY
    exact (le_himp_iff.mp (hpw.trans hpZ)).trans' <|
      le_inf le_rfl
      (le_inf (le_inf hXDr hedge) (hZu.trans' hrs))
    have hsubq : r sqcap (memB F S sqcap engelerAppPred F X q) <=
      subsetB (engelerAppName F X) Z := by
      have hrel := hrelXZ
      rw [relB_engelerR] at hrel
      exact hrel.trans inf_le_right
    exact (memB_of_subsetB q (engelerAppName F X) Z).trans' <|
      le_inf happq hsubq
    have hYZ : s <= subsetB Y Z :=
      (AName.subsetB_trans Y (engelerAppName x X) Z).trans' <|
      le_inf ((eqB_le_subsetB Y (engelerAppName x X)).trans' hYeq) happZ
    have hZD : s <= memB Z (engelerD (A := A)) := by
      have huC : s <= memB u (engelerC (A := A)) :=
        (engelerFun_upper_le_memB_u (A := A) S x y u).trans' inf_le_left
      have hfun : s <= isFunctionB u (engelerD (A := A))
        (engelerD (A := A)) := by
        have hsc : s <= isScottContinuousB u (engelerD (A := A))
          (engelerD (A := A)) (engelerR (A := A)) (engelerR (A := A)) := by
          rw [← memB_engelerC]
          exact huC
        exact hsc.trans (inf_le_of_left_le inf_le_left)
      exact (local_function_edge_le_codomain hfun X Z).trans' <|
        le_inf le_rfl hZu
    rw [relB_engelerR]
    exact le_inf (le_inf hYD hZD) hYZ

theorem engelerFun_mapsToSup_least [Nontrivial A]
  (S x y u : AName.{u} A) :
  isDirectedRelB S (engelerD (A := A)) (engelerR (A := A)) sqcap
  isSupRelB x S (engelerR (A := A)) sqcap
  memB (opairB x y) (engelerFun (A := A)) sqcap
  (? F : AName.{u} A, ? G : AName.{u} A,
    memB F S sqcap memB (opairB F G) (engelerFun (A := A)) ?
    relB (engelerQ (A := A)) G u) <=
  relB (engelerQ (A := A)) y u := by
  let t :=
    isDirectedRelB S (engelerD (A := A)) (engelerR (A := A)) sqcap
    isSupRelB x S (engelerR (A := A)) sqcap
    memB (opairB x y) (engelerFun (A := A)) sqcap
    (? F : AName.{u} A, ? G : AName.{u} A,
      memB F S sqcap memB (opairB F G) (engelerFun (A := A)) ?
      relB (engelerQ (A := A)) G u)
  have hyC : t <= memB y (engelerC (A := A)) :=
    (engelerFun_mem_le_eqB (A := A) x y).trans'
    (inf_le_left.trans inf_le_right) |>.trans
    (inf_le_left.trans inf_le_right)
  have huC : t <= memB u (engelerC (A := A)) :=
    engelerFun_upper_le_memB_u (A := A) S x y u
  have hpw : t <=
    pointwiseLeB y u (engelerD (A := A)) (engelerR (A := A)) :=
    engelerFun_mapsToSup_least_pointwise (A := A) S x y u
  change t <= relB (engelerQ (A := A)) y u

```

```

rw [relB_engelerQ]
exact le_inf (le_inf hyC huC) hpw

theorem mapsToSupB_engelerFun [Nontrivial A]
  (S x y : AName.{u} A) :
  isDirectedRelB S (engelerD (A := A)) (engelerR (A := A)) sqcap
  isSupRelB x S (engelerR (A := A)) sqcap
  memB (opairB x y) (engelerFun (A := A)) <=
  mapsToSupB (engelerFun (A := A)) S y (engelerQ (A := A)) := by
  unfold mapsToSupB
  refine le_inf ?up ?least
  * refine le_iInf fun F => le_iInf fun G => ?_
  rw [le_himp_iff]
  exact (engelerFun_mapsToSup_upper (A := A) S x y F G).trans' <|
  le_inf
  (le_inf inf_le_left (inf_le_right.trans inf_le_left))
  (inf_le_right.trans inf_le_right)
  * refine le_iInf fun u => ?_
  rw [le_himp_iff]
  exact engelerFun_mapsToSup_least (A := A) S x y u

theorem isScottContinuousB_engelerFun [Nontrivial A] :
  isScottContinuousB (engelerFun (A := A))
  (engelerD (A := A)) (engelerC (A := A))
  (engelerR (A := A)) (engelerQ (A := A)) = top := by
  unfold isScottContinuousB
  refine inf_eq_top_iff.mpr <inf_eq_top_iff.mpr <?hfun, ?hmono>, ?hsup>
  * exact isFunctionB_engelerFun (A := A)
  * refine iInf_eq_top.mpr fun F => iInf_eq_top.mpr fun F' =>
    iInf_eq_top.mpr fun G => iInf_eq_top.mpr fun G' =>
    himp_eq_top_iff.mpr (engelerFun_mono (A := A) F F' G G')
  * refine iInf_eq_top.mpr fun S => iInf_eq_top.mpr fun x =>
    iInf_eq_top.mpr fun y => himp_eq_top_iff.mpr ?_
  exact mapsToSupB_engelerFun (A := A) S x y

theorem engelerLamRel_val [Nontrivial A]
  (j : (engelerC (A := A)).idx) (i : (engelerD (A := A)).idx) :
  (engelerLamRel (A := A)).val j i =
  memB ((engelerC (A := A)).child j) (engelerC (A := A)) sqcap
  eqB ((engelerD (A := A)).child (engelerLamIdx (A := A) j))
  ((engelerD (A := A)).child i) := by
  have h : (engelerLamRel (A := A)).val j i =
  (oid (engelerC (A := A))).eps j sqcap
  (oid (engelerD (A := A))).eq (engelerLamIdx (A := A) j) i :=
  rfl
  rw [h, oid_eps, oid_engelerD_eq]

theorem memB_opairB_engelerLamB [Nontrivial A] (G L : AName.{u} A) :
  memB (opairB G L) (engelerLamB (A := A)) =
  bigcup j : (engelerC (A := A)).idx, bigcup i : (engelerD (A := A)).idx,
  eqB G ((engelerC (A := A)).child j) sqcap
  eqB L ((engelerD (A := A)).child i) sqcap
  (memB ((engelerC (A := A)).child j) (engelerC (A := A)) sqcap
  eqB ((engelerD (A := A)).child (engelerLamIdx (A := A) j))
  ((engelerD (A := A)).child i)) := by
  unfold engelerLamB
  rw [relFunGraphName, memB_mk]
  refine le_antisymm ?le ?ge
  * refine iSup_le fun p => ?_
  rw [eqB_opairB, engelerLamRel_val]
  exact le_iSup_of_le p.1 (le_iSup_of_le p.2 le_rfl)
  * refine iSup_le fun j => iSup_le fun i => ?_
  refine le_iSup_of_le (j, i) ?_

```

```

    rw [eqB_opairB, engelerLamRel_val]

theorem memB_check_finsetPSet_engelerD [Nontrivial A] (K : Finset Nat) :
  memB (check (A := A) (finsetPSet K)) (engelerD (A := A)) = top := by
  unfold engelerD
  rw [memB_powerB]
  have h? : subsetB (check (A := A) (finsetPSet K))
    (check (A := A) PSet.omega) = top := by
    rw [subsetB_finsetPSet]
    exact iInf_eq_top.mpr fun _ => memB_check_ofNat_omega _
  have hxt : eqB (check (A := A) PSet.omega)
    (checkExt (A := A) PSet.omega) = top :=
    eqB_check_checkExt (A := A) PSet.omega
  exact top_unique
  ((AName.subsetB_trans (check (A := A) (finsetPSet K))
    (check (A := A) PSet.omega)
    (checkExt (A := A) PSet.omega)).trans' <|
    le_inf (le_top.trans h?.ge)
    ((eqB_le_subsetB (check (A := A) PSet.omega)
      (checkExt (A := A) PSet.omega)).trans'
      (le_top.trans hxt.ge)))

theorem engelerLamB_mem_le_eqB [Nontrivial A] (G L : AName.{u} A) :
  memB (opairB G L) (engelerLamB (A := A)) <=
    memB G (engelerC (A := A)) sqcap memB L (engelerD (A := A)) sqcap
    eqB L (engelerLamGraphName G) := by
  have hprod : memB (opairB G L) (engelerLamB (A := A)) <=
    memB G (engelerC (A := A)) sqcap memB L (engelerD (A := A)) := by
    have hsub := isFunctionB_subset (isFunctionB_engelerLamB (A := A))
    have hm := memB_of_subsetB (opairB G L) (engelerLamB (A := A))
    (prodB (engelerC (A := A)) (engelerD (A := A)))
  rw [hsub, inf_top_eq] at hm
  rwa [memB_opairB_prodB] at hm
  refine le_inf hprod ?heq
  rw [memB_opairB_engelerLamB]
  refine iSup_le fun j => iSup_le fun i => ?_
  let t :=
    eqB G ((engelerC (A := A)).child j) sqcap
    eqB L ((engelerD (A := A)).child i) sqcap
    (memB ((engelerC (A := A)).child j) (engelerC (A := A)) sqcap
      eqB ((engelerD (A := A)).child (engelerLamIdx (A := A) j))
        ((engelerD (A := A)).child i))
  change t <= eqB L (engelerLamGraphName G)
  have hLi : t <= eqB L ((engelerD (A := A)).child i) :=
    inf_le_left.trans inf_le_right
  have hil : t <=

```

Lean 4 source (lines 2401–2800)

```

    eqB ((engelerD (A := A)).child i)
      ((engelerD (A := A)).child (engelerLamIdx (A := A) j)) := by
  rw [eqB_comm]
  exact inf_le_right.trans inf_le_right
  have hLidx : t <=
    eqB L ((engelerD (A := A)).child (engelerLamIdx (A := A) j)) :=
    (eqB_trans L ((engelerD (A := A)).child i)
      ((engelerD (A := A)).child (engelerLamIdx (A := A) j))).trans'
    (le_inf hLi hil)
  have hrestr : eqB
    ((engelerD (A := A)).child (engelerLamIdx (A := A) j))
    (engelerLamGraphName ((engelerC (A := A)).child j)) = top := by
  rw [engelerLamIdx_child, eqB_comm]
  exact eqB_restrict_engelerLamGraphName ((engelerC (A := A)).child j)
  have hllam : t <=

```



```

    eqB L (engelerLamGraphName ((engelerC (A := A)).child j)) :=
    (eqB_trans L
      ((engelerD (A := A)).child (engelerLamIdx (A := A) j))
      (engelerLamGraphName ((engelerC (A := A)).child j))).trans' <|
    le_inf hLidx (le_top.trans hrestr.ge)
  have hGj : t <= eqB ((engelerC (A := A)).child j) G := by
    rw [eqB_comm]
    exact inf_le_left.trans inf_le_left
  exact (eqB_trans L
    (engelerLamGraphName ((engelerC (A := A)).child j))
    (engelerLamGraphName G)).trans' <|
  le_inf hLlam
    ((engelerLamGraphName_congr ((engelerC (A := A)).child j) G).trans' hGj)

theorem memB_engelerC_le_subsetB_prod [Nontrivial A] (G : AName.{u} A) :
  memB G (engelerC (A := A)) <=
    subsetB G (prodB (engelerD (A := A)) (engelerD (A := A))) := by
  rw [memB_engelerC]
  exact inf_le_of_left_le (inf_le_of_left_le (inf_le_of_left_le inf_le_left))

theorem le_memB_opairB_engelerLamB [Nontrivial A]
  (G L : AName.{u} A) :
  memB G (engelerC (A := A)) sqcap memB L (engelerD (A := A)) sqcap
    eqB L (engelerLamGraphName G) <=
  memB (opairB G L) (engelerLamB (A := A)) := by
  let j : (engelerC (A := A)).idx :=
    restrictPowerIdx G (prodB (engelerD (A := A)) (engelerD (A := A)))
  have hchild : (engelerC (A := A)).child j =
    restrictName G (prodB (engelerD (A := A)) (engelerD (A := A))) :=
    restrictPowerIdx_child _ _
  have hG : memB G (engelerC (A := A)) <=
    eqB G ((engelerC (A := A)).child j) := by
    rw [hchild]
    exact (subsetB_le_eqB_restrict G
      (prodB (engelerD (A := A)) (engelerD (A := A)))) .trans'
      (memB_engelerC_le_subsetB_prod (A := A) G)
  have hGj : memB G (engelerC (A := A)) <=
    eqB ((engelerC (A := A)).child j) G := by
    rw [eqB_comm]
    exact hG
  have hmemC : memB G (engelerC (A := A)) <=
    memB ((engelerC (A := A)).child j) (engelerC (A := A)) := by
    have h := (isScottContinuousB_congr G ((engelerC (A := A)).child j)
      (engelerD (A := A)) (engelerD (A := A))
      (engelerR (A := A)) (engelerR (A := A))).trans' <|
    le_inf hG (by rw [memB_engelerC])
    rwa [ <- memB_engelerC ] at h
  have hlam : memB G (engelerC (A := A)) <=
    eqB (engelerLamGraphName G
      (engelerLamGraphName ((engelerC (A := A)).child j)) :=
      (engelerLamGraphName_congr G ((engelerC (A := A)).child j)).trans' hG)
  have hrestr : eqB
    ((engelerD (A := A)).child (engelerLamIdx (A := A) j))
    (engelerLamGraphName ((engelerC (A := A)).child j)) = top := by
    rw [engelerLamIdx_child, eqB_comm]
    exact eqB_restrict_engelerLamGraphName ((engelerC (A := A)).child j)
  rw [memB_opairB_engelerLamB]
  refine le_iSup_of_le j (le_iSup_of_le (engelerLamIdx (A := A) j) ?_)
  refine le_inf (le_inf (hG.trans' (inf_le_of_left_le inf_le_left)) ?hL)
    (le_inf (hmemC.trans' (inf_le_of_left_le inf_le_left))
      (le_top.trans (eqB_self _).ge))
  refine (eqB_trans L (engelerLamGraphName G)
    ((engelerD (A := A)).child (engelerLamIdx (A := A) j))).trans' ?_

```

```

refine le_inf inf_le_right ?_
refine (eqB_trans (engelerLamGraphName G)
  (engelerLamGraphName ((engelerC (A := A)).child j))
  ((engelerD (A := A)).child (engelerLamIdx (A := A) j))).trans' ?_
refine le_inf ?_ (le_top.trans (by rw [eqB_comm]; exact hrestr.ge))
exact (hlam.trans' (inf_le_of_left_le inf_le_left))

theorem memB_engelerC_le_isFunction [Nontrivial A] (G : AName.{u} A) :
  memB G (engelerC (A := A)) <=
    isFunctionB G (engelerD (A := A)) (engelerD (A := A)) := by
  rw [memB_engelerC]
  exact inf_le_left.trans inf_le_left

theorem memB_engelerC_le_isTotal [Nontrivial A] (G : AName.{u} A) :
  memB G (engelerC (A := A)) <=
    isTotalB G (engelerD (A := A)) :=
  (memB_engelerC_le_isFunction (A := A) G).trans inf_le_right

theorem subsetB_engelerLamGraphName_of_pointwise [Nontrivial A]
  (G G' : AName.{u} A) :
  memB G (engelerC (A := A)) sqcap memB G' (engelerC (A := A)) sqcap
    pointwiseLeB G G' (engelerD (A := A)) (engelerR (A := A)) <=
    subsetB (engelerLamGraphName G) (engelerLamGraphName G') := by
  rw [subsetB_eq_iInf (engelerLamGraphName G) (engelerLamGraphName G')]
  refine le_iInf fun q => ?_
  rw [le_himp_iff, memB_engelerLamGraphName, memB_engelerLamGraphName]
  refine le_inf (inf_le_of_right_le inf_le_left) ?_
  let s :=
    memB G (engelerC (A := A)) sqcap memB G' (engelerC (A := A)) sqcap
      pointwiseLeB G G' (engelerD (A := A)) (engelerR (A := A)) sqcap
      (memB q (check (A := A) PSet.omega) sqcap engelerLamGraphPred G q)
  change s <= engelerLamGraphPred G' q
  unfold engelerLamGraphPred
  have hpred : s <= engelerLamGraphPred G q :=
    inf_le_right.trans inf_le_right
  have hspred : s = s sqcap engelerLamGraphPred G q :=
    (inf_eq_left.mpr hpred).symm
  rw [hspred]
  unfold engelerLamGraphPred
  rw [inf_iSup_eq]
  refine iSup_le fun K => ?_
  rw [inf_iSup_eq]
  refine iSup_le fun n => ?_
  rw [inf_iSup_eq]
  refine iSup_le fun Y => ?_
  have htot : s sqcap
    (eqB q (pairApplyB (A := A) K n) sqcap
      memB (opairB (check (A := A) (finsetPSet K)) Y) G sqcap
      memB (check (PSet.ofNat n)) Y) <=
    bigcup Z, memB (opairB (check (A := A) (finsetPSet K)) Z) G' := by
  have happ := isTotalB_apply G' (engelerD (A := A))
    (check (A := A) (finsetPSet K))
  refine happ.trans' ?_
  refine le_inf ((memB_engelerC_le_isTotal (A := A) G').trans'
    (inf_le_left.trans (inf_le_left.trans (inf_le_left.trans inf_le_right))))
  (le_top.trans (memB_check_finsetPSet_engelerD (A := A) K).ge)
  have heq : s sqcap
    (eqB q (pairApplyB (A := A) K n) sqcap
      memB (opairB (check (A := A) (finsetPSet K)) Y) G sqcap
      memB (check (PSet.ofNat n)) Y) =
    (s sqcap
      (eqB q (pairApplyB (A := A) K n) sqcap
        memB (opairB (check (A := A) (finsetPSet K)) Y) G sqcap

```

```

      memB (check (PSet.ofNat n)) Y)) sqcap
      bigcup Z, memB (opairB (check (A := A) (finsetPSet K)) Z) G' :=
      (inf_eq_left.mpr htot).symm
rw [heq, inf_iSup_eq]
refine iSup_le fun Z =>
  le_iSup_of_le K (le_iSup_of_le n (le_iSup_of_le Z ?_))
let r :=
  (s sqcap
    (eqB q (pairApplyB (A := A) K n) sqcap
      memB (opairB (check (A := A) (finsetPSet K)) Y) G sqcap
      memB (check (PSet.ofNat n)) Y)) sqcap
      memB (opairB (check (A := A) (finsetPSet K)) Z) G'
change r <=
  eqB q (pairApplyB (A := A) K n) sqcap
  memB (opairB (check (A := A) (finsetPSet K)) Z) G' sqcap
  memB (check (PSet.ofNat n)) Z
have hq : r <= eqB q (pairApplyB (A := A) K n) :=
  inf_le_left.trans (inf_le_right.trans (inf_le_left.trans inf_le_left))
have hZG' : r <=
  memB (opairB (check (A := A) (finsetPSet K)) Z) G' :=
  inf_le_right
have hYG : r <=
  memB (opairB (check (A := A) (finsetPSet K)) Y) G :=
  inf_le_left.trans (inf_le_right.trans (inf_le_left.trans inf_le_right))
have hnY : r <= memB (check (PSet.ofNat n)) Y :=
  inf_le_left.trans (inf_le_right.trans inf_le_right)
have hrs : r <= s := inf_le_left.trans inf_le_left
have hpw : r <=
  pointwiseLeB G G' (engelerD (A := A)) (engelerR (A := A)) :=
  hrs.trans (inf_le_left.trans inf_le_right)
have hp := iInf_le (fun X' : AName.{u} A =>
  ? Y' : AName.{u} A, ? Z' : AName.{u} A,
  memB X' (engelerD (A := A)) sqcap
  memB (opairB X' Y') G sqcap memB (opairB X' Z') G' ?
  relB (engelerR (A := A)) Y' Z'))
  (check (A := A) (finsetPSet K))
have hpY := (iInf_le (fun Y' : AName.{u} A =>
  ? Z' : AName.{u} A,
  memB (check (A := A) (finsetPSet K)) (engelerD (A := A)) sqcap
  memB (opairB (check (A := A) (finsetPSet K)) Y') G sqcap
  memB (opairB (check (A := A) (finsetPSet K)) Z') G' ?
  relB (engelerR (A := A)) Y' Z') Y).trans' hp
have hpZ := (iInf_le (fun Z' : AName.{u} A =>
  memB (check (A := A) (finsetPSet K)) (engelerD (A := A)) sqcap
  memB (opairB (check (A := A) (finsetPSet K)) Y) G sqcap
  memB (opairB (check (A := A) (finsetPSet K)) Z') G' ?
  relB (engelerR (A := A)) Y Z') Z).trans' hpY
have hrel : r <= relB (engelerR (A := A)) Y Z :=
  (le_himp_iff.mp (hpw.trans hpZ)).trans' <|
  le_inf le_rfl
  (le_inf (le_inf
    (le_top.trans (memB_check_finsetPSet_engelerD (A := A) K).ge)
    hYG) hZG')
have hsubYZ : r <= subsetB Y Z := by
  have h := hrel
  rw [relB_engelerR] at h
  exact h.trans inf_le_right
have hnZ : r <= memB (check (PSet.ofNat n)) Z :=
  (memB_of_subsetB (check (PSet.ofNat n)) Y Z).trans' (le_inf hnY hsubYZ)
exact le_inf (le_inf hq hZG') hnZ

theorem engelerLamB_mono [Nontrivial A] (G G' L L' : AName.{u} A) :
  memB (opairB G L) (engelerLamB (A := A)) sqcap

```

```

    memB (opairB G' L') (engelerLamB (A := A)) sqcap
    relB (engelerQ (A := A)) G G' <=
    relB (engelerR (A := A)) L L' := by
let t :=
    memB (opairB G L) (engelerLamB (A := A)) sqcap
    memB (opairB G' L') (engelerLamB (A := A)) sqcap
    relB (engelerQ (A := A)) G G'
have hLall : t <=
    memB G (engelerC (A := A)) sqcap memB L (engelerD (A := A)) sqcap
    eqB L (engelerLamGraphName G) :=
    (engelerLamB_mem_le_eqB (A := A) G L).trans'
    (inf_le_left.trans inf_le_left)
have hL'all : t <=
    memB G' (engelerC (A := A)) sqcap memB L' (engelerD (A := A)) sqcap
    eqB L' (engelerLamGraphName G') :=
    (engelerLamB_mem_le_eqB (A := A) G' L').trans'
    (inf_le_left.trans inf_le_right)
have hLD : t <= memB L (engelerD (A := A)) :=
    hLall.trans (inf_le_left.trans inf_le_right)
have hL'D : t <= memB L' (engelerD (A := A)) :=
    hL'all.trans (inf_le_left.trans inf_le_right)
have hLeq : t <= eqB L (engelerLamGraphName G) :=
    hLall.trans inf_le_right
have hL'eq : t <= eqB L' (engelerLamGraphName G') :=
    hL'all.trans inf_le_right
have hQ : t <= relB (engelerQ (A := A)) G G' := inf_le_right
have hGC : t <= memB G (engelerC (A := A)) := by
    have h := hQ
    rw [relB_engelerQ] at h
    exact h.trans (inf_le_left.trans inf_le_left)
have hG'C : t <= memB G' (engelerC (A := A)) := by
    have h := hQ
    rw [relB_engelerQ] at h
    exact h.trans (inf_le_left.trans inf_le_right)
have hpw : t <=
    pointwiseLeB G G' (engelerD (A := A)) (engelerR (A := A)) := by
    have h := hQ
    rw [relB_engelerQ] at h
    exact h.trans inf_le_right
have hlam : t <=
    subsetB (engelerLamGraphName G) (engelerLamGraphName G') :=
    (subsetB_engelerLamGraphName_of_pointwise (A := A) G G').trans' <|
    le_inf (le_inf hGC hG'C) hpw
have hsub : t <= subsetB L L' :=
    (subsetB_congr (engelerLamGraphName G) L
    (engelerLamGraphName G') L').trans' <|
    le_inf (le_inf (by rw [eqB_comm]; exact hLeq)
    (by rw [eqB_comm]; exact hL'eq)) hlam
change t <= relB (engelerR (A := A)) L L'
rw [relB_engelerR]
exact le_inf (le_inf hLD hL'D) hsub

theorem memB_pairApplyB_engelerLamGraphName [Nontrivial A]
  (G : AName.{u} A) (K : Finset Nat) (n : Nat) :
  memB (pairApplyB (A := A) K n) (engelerLamGraphName G) =
    bigcup Y : AName.{u} A,
    memB (opairB (check (A := A) (finsetPSet K)) Y) G sqcap
    memB (check (PSet.ofNat n)) Y := by
  rw [memB_engelerLamGraphName, pairApplyB_mem_omega, top_inf_eq]
  unfold engelerLamGraphPred
  refine le_antisymm ?le ?ge
  * refine iSup_le fun K' => iSup_le fun n' => iSup_le fun Y => ?_
    cases eq_or_ne (engelerPair (K, n)) (engelerPair (K', n')) with

```

```

| inl hpair =>
  obtain <rfl, rfl> := Prod.mk_inj.mp (engelerPair_injective hpair)
  exact le_iSup_of_le Y
    (le_inf (inf_le_left.trans inf_le_right) inf_le_right)
| inr hne =>
  have hbot : eqB (A := A) (pairApplyB K n) (pairApplyB K' n') = False :=
    eqB_check_ofNat_bot (A := A) hne
  rw [hbot, bot_inf_eq, bot_inf_eq]
  exact bot_le (a := A)
* refine iSup_le fun Y => le_iSup_of_le K (le_iSup_of_le n (le_iSup_of_le Y ?_))
  rw [eqB_self (A := A) (pairApplyB K n), top_inf_eq]

theorem memB_check_ofNat_app_lamGraph [Nontrivial A]
  (G X : AName.{u} A) (n : Nat) :
  memB (check (PSet.ofNat n))
    (engelerAppName (engelerLamGraphName G) X) =
    bigcup K : Finset Nat, bigcup Y : AName.{u} A,
    subsetB (check (A := A) (finsetPSet K)) X sqcap
    memB (opairB (check (A := A) (finsetPSet K)) Y) G sqcap
    memB (check (PSet.ofNat n)) Y := by
  rw [memB_engelerAppName, memB_check_ofNat_omega, top_inf_eq]
  unfold engelerAppPred
  refine le_antisymm ?le ?ge
* refine iSup_le fun K => iSup_le fun m => ?_
  cases eq_or_ne n m with
| inl hnm =>
  subst hnm
  rw [eqB_self (A := A) (check (PSet.ofNat n)), top_inf_eq,
    memB_pairApplyB_engelerLamGraphName, inf_iSup_eq]
  refine iSup_le fun Y => le_iSup_of_le K (le_iSup_of_le Y ?_)
  exact le_inf (le_inf inf_le_left (inf_le_right.trans inf_le_left))
    (inf_le_right.trans inf_le_right)
| inr hne =>
  have hbot : eqB (A := A) (check (PSet.ofNat n)) (check (PSet.ofNat m)) = False :=
    eqB_check_ofNat_bot (A := A) hne
  rw [hbot, bot_inf_eq, bot_inf_eq]
  exact bot_le (a := A)
* refine iSup_le fun K => iSup_le fun Y => ?_
  refine le_iSup_of_le K (le_iSup_of_le n ?_)
  rw [eqB_self (A := A) (check (PSet.ofNat n)), top_inf_eq,
    memB_pairApplyB_engelerLamGraphName]
  refine le_inf (inf_le_left.trans inf_le_left) (le_iSup_of_le Y ?_)
  exact le_inf (inf_le_left.trans inf_le_right) inf_le_right

theorem subsetB_finsetPSet_union_le (K L : Finset Nat) (X : AName.{u} A) :
  subsetB (check (A := A) (finsetPSet K)) X sqcap
  subsetB (check (A := A) (finsetPSet L)) X <=
  subsetB (check (A := A) (finsetPSet (K U L))) X := by
  rw [subsetB_finsetPSet, subsetB_finsetPSet, subsetB_finsetPSet]
  refine le_iInf fun n => ?_
  have hn : n.1 in K \ / n.1 in L := Finset.mem_union.mp n.2
  cases hn with
| inl hK =>
  exact inf_le_of_left_le (iInf_le (fun m : {m : Nat // m in K} =>
    memB (check (PSet.ofNat m.1)) X) <n.1, hK>)
| inr hL =>
  exact inf_le_of_right_le (iInf_le (fun m : {m : Nat // m in L} =>
    memB (check (PSet.ofNat m.1)) X) <n.1, hL>)

theorem subsetB_finsetPSet_subset {K L : Finset Nat} (h : K subseq L) :
  subsetB (check (A := A) (finsetPSet K))
    (check (A := A) (finsetPSet L)) = top := by
  rw [subsetB_finsetPSet]

```

```

refine iInf_eq_top.mpr fun n => ?_
exact memB_check_of_mem (A := A)
  <<n.1, h n.2>>, PSet.Equiv.rfl>

noncomputable def engelerGroundFinPred (X U : AName.{u} A) : A :=
  bigcup K : Finset Nat,
    eqB U (check (A := A) (finsetPSet K)) sqcap
      subsetB (check (A := A) (finsetPSet K)) X

theorem engelerGroundFinPred_congr (X U U' : AName.{u} A) :
  eqB U U' sqcap engelerGroundFinPred X U <= engelerGroundFinPred X U' := by
  unfold engelerGroundFinPred
  rw [inf_iSup_eq]
  refine iSup_le fun K => le_iSup_of_le K ?_
  refine le_inf ?_ (inf_le_of_right_le inf_le_right)
  exact (eqB_trans U' U (check (A := A) (finsetPSet K))).trans' <|
    le_inf (by rw [eqB_comm]; exact inf_le_left)
      (inf_le_of_right_le inf_le_left)

noncomputable def engelerGroundFins (X : AName.{u} A) : AName.{u} A :=
  sepB (engelerD (A := A)) (engelerGroundFinPred X)

theorem memB_engelerGroundFins (X U : AName.{u} A) :
  memB U (engelerGroundFins X) =
    memB U (engelerD (A := A)) sqcap engelerGroundFinPred X U :=
  memB_sepB U (engelerD (A := A)) (engelerGroundFinPred X)
  (engelerGroundFinPred_congr X)

theorem subsetB_engelerGroundFins_D (X : AName.{u} A) :
  subsetB (engelerGroundFins X) (engelerD (A := A)) = top :=
  subsetB_sepB _ _

theorem memB_check_finsetPSet_engelerGroundFins [Nontrivial A]
  (K : Finset Nat) (X : AName.{u} A) :
  subsetB (check (A := A) (finsetPSet K)) X <=
    memB (check (A := A) (finsetPSet K)) (engelerGroundFins X) := by
  rw [memB_engelerGroundFins]
  refine le_inf (le_top.trans (memB_check_finsetPSet_engelerD (A := A) K).ge) ?_
  unfold engelerGroundFinPred
  exact le_iSup_of_le K (le_inf (le_top.trans (eqB_self _).ge) le_rfl)

theorem nonempty_engelerGroundFins [Nontrivial A] (X : AName.{u} A) :
  (bigcup U : AName.{u} A, memB U (engelerGroundFins X)) = top := by
  refine top_unique (le_iSup_of_le (check (A := A) (finsetPSet ({} : Finset Nat))) ?_)
  have hempty : subsetB (check (A := A) (finsetPSet ({} : Finset Nat))) X = top := by
    rw [subsetB_finsetPSet]
    exact iInf_of_empty _
  exact (memB_check_finsetPSet_engelerGroundFins ({} : Finset Nat) X).trans'
    (le_top.trans hempty.ge)

theorem isDirectedRelB_engelerGroundFins [Nontrivial A]
  (X : AName.{u} A) :
  isDirectedRelB (engelerGroundFins X) (engelerD (A := A))
    (engelerR (A := A)) = top := by
  unfold isDirectedRelB
  refine inf_eq_top_iff.mpr <inf_eq_top_iff.mpr <?hsub, ?hne>, ?hdir>
  * exact subsetB_engelerGroundFins_D X
  * exact nonempty_engelerGroundFins (A := A) X
  * refine iInf_eq_top.mpr fun U => iInf_eq_top.mpr fun V =>
      himp_eq_top_iff.mpr ?_
  rw [memB_engelerGroundFins, memB_engelerGroundFins]
  let s :=
    memB U (engelerD (A := A)) sqcap engelerGroundFinPred X U sqcap

```

```

      (memB V (engelerD (A := A)) sqcap engelerGroundFinPred X V)
change s <=
  bigcup z : AName.{u} A,
    memB z (engelerGroundFins X) sqcap
      relB (engelerR (A := A)) U z sqcap relB (engelerR (A := A)) V z
have hUpred : s <= engelerGroundFinPred X U :=
  inf_le_left.trans inf_le_right

```

Lean 4 source (lines 2801–3200)

```

have hVpred : s <= engelerGroundFinPred X V :=
  inf_le_right.trans inf_le_right
have hsU : s = s sqcap engelerGroundFinPred X U :=
  (inf_eq_left.mpr hUpred).symm
rw [hsU]
unfold engelerGroundFinPred
rw [inf_iSup_eq]
refine iSup_le fun K => ?_
let tK :=
  s sqcap (eqB U (check (A := A) (finsetPSet K)) sqcap
    subsetB (check (A := A) (finsetPSet K)) X)
have hsV : tK = tK sqcap engelerGroundFinPred X V :=
  (inf_eq_left.mpr (hVpred.trans' inf_le_left)).symm
change tK <= _
rw [hsV]
unfold engelerGroundFinPred
rw [inf_iSup_eq]
refine iSup_le fun L => ?_
refine le_iSup_of_le (check (A := A) (finsetPSet (K U L))) ?_
let r :=
  tK sqcap (eqB V (check (A := A) (finsetPSet L)) sqcap
    subsetB (check (A := A) (finsetPSet L)) X)
change r <=
  memB (check (A := A) (finsetPSet (K U L))) (engelerGroundFins X) sqcap
    relB (engelerR (A := A)) U (check (A := A) (finsetPSet (K U L))) sqcap
      relB (engelerR (A := A)) V (check (A := A) (finsetPSet (K U L)))
have hKX : r <= subsetB (check (A := A) (finsetPSet K)) X :=
  inf_le_left.trans (inf_le_right.trans inf_le_right)
have hLX : r <= subsetB (check (A := A) (finsetPSet L)) X :=
  inf_le_right.trans inf_le_right
have hW : r <=
  memB (check (A := A) (finsetPSet (K U L))) (engelerGroundFins X) :=
  (memB_check_finsetPSet_engelerGroundFins (K U L) X).trans' <|
    (subsetB_finsetPSet_union_le K L X).trans' (le_inf hKX hLX)
have hUD : r <= memB U (engelerD (A := A)) :=
  inf_le_left.trans (inf_le_left.trans (inf_le_left.trans inf_le_left))
have hVD : r <= memB V (engelerD (A := A)) :=
  inf_le_left.trans (inf_le_left.trans (inf_le_right.trans inf_le_left))
have hUeq : r <= eqB U (check (A := A) (finsetPSet K)) :=
  inf_le_left.trans (inf_le_right.trans inf_le_left)
have hVeq : r <= eqB V (check (A := A) (finsetPSet L)) :=
  inf_le_right.trans inf_le_left
have hUW : r <=
  relB (engelerR (A := A)) U
    (check (A := A) (finsetPSet (K U L))) := by
rw [relB_engelerR]
refine le_inf (le_inf hUD
  (le_top.trans (memB_check_finsetPSet_engelerD (A := A) (K U L)).ge)) ?_
exact (subsetB_congr (check (A := A) (finsetPSet K)) U
  (check (A := A) (finsetPSet (K U L)))
  (check (A := A) (finsetPSet (K U L))).trans' <|
  le_inf (le_inf (by rw [eqB_comm]; exact hUeq)
    (le_top.trans (eqB_self _).ge))
  (le_top.trans (subsetB_finsetPSet_subset

```

```

      (Finset.subset_union_left (s_1 := K) (s_2 := L))).ge)
have hVW : r <=
  relB (engelerR (A := A)) V
  (check (A := A) (finsetPSet (K U L))) := by
  rw [relB_engelerR]
  refine le_inf (le_inf hVD
    (le_top.trans (memB_check_finsetPSet_engelerD (A := A) (K U L)).ge)) ?_
  exact (subsetB_congr (check (A := A) (finsetPSet L)) V
    (check (A := A) (finsetPSet (K U L)))
    (check (A := A) (finsetPSet (K U L))).trans' <|
    le_inf (le_inf (by rw [eqB_comm]; exact hVeq)
      (le_top.trans (eqB_self _).ge))
    (le_top.trans (subsetB_finsetPSet_subset
      (Finset.subset_union_right (s_1 := K) (s_2 := L))).ge)
  exact le_inf (le_inf hW hUW) hVW

theorem memB_le_iSup_check_ofNat [Nontrivial A] (x : AName.{u} A) :
  memB x (checkExt (A := A) PSet.omega) <=
    bigcup n : Nat, eqB x (check (A := A) (PSet.ofNat n)) := by
  have hxt : eqB (checkExt (A := A) PSet.omega)
    (check (A := A) PSet.omega) = top := by
    rw [eqB_comm]
    exact eqB_check_checkExt (A := A) PSet.omega
  have h : memB x (checkExt (A := A) PSet.omega) =
    memB x (check (A := A) PSet.omega) :=
    eqB_top_memB_right hxt
  rw [h, check_omega_eq, memB_mk]
  refine iSup_le fun n => le_iSup_of_le n.down inf_le_left

theorem isUpperBoundRelB_engelerGroundFins [Nontrivial A]
  (X : AName.{u} A) :
  memB X (engelerD (A := A)) <=
    isUpperBoundRelB X (engelerGroundFins X) (engelerR (A := A)) := by
  unfold isUpperBoundRelB
  refine le_iInf fun U => ?_
  rw [le_himp_iff, memB_engelerGroundFins, relB_engelerR]
  refine le_inf (le_inf (inf_le_right.trans inf_le_left) inf_le_left) ?_
  let t :=
    memB X (engelerD (A := A)) sqcap
    (memB U (engelerD (A := A)) sqcap engelerGroundFinPred X U)
  change t <= subsetB U X
  have hpred : t <= engelerGroundFinPred X U :=
    inf_le_right.trans inf_le_right
  have heq : t = t sqcap engelerGroundFinPred X U :=
    (inf_eq_left.mpr hpred).symm
  rw [heq]
  unfold engelerGroundFinPred
  rw [inf_iSup_eq]
  refine iSup_le fun K => ?_
  exact (subsetB_congr (check (A := A) (finsetPSet K)) U X X).trans' <|
    le_inf (le_inf (by rw [eqB_comm]; exact inf_le_right.trans inf_le_left)
      (le_top.trans (eqB_self _).ge))
    (inf_le_right.trans inf_le_right)

theorem subsetB_engelerGroundFins_le_X [Nontrivial A]
  (X : AName.{u} A) :
  memB X (engelerD (A := A)) <=
    subsetB X (sUnionB (engelerGroundFins X)) := by
  rw [subsetB_eq_iInf]
  refine le_iInf fun x => ?_
  rw [le_himp_iff, memB_sUnionB]
  unfold existsMemB
  have hx? : memB X (engelerD (A := A)) sqcap memB x X <=

```



```

    memB x (checkExt (A := A) PSet.omega) :=
(memB_of_subsetB x X (checkExt (A := A) PSet.omega)).trans' <|
  le_inf inf_le_right (by
    have h : memB X (engelerD (A := A)) =
      subsetB X (checkExt (A := A) PSet.omega) := by
        unfold engelerD
        exact memB_powerB X _
      rw [h]
      exact inf_le_left)
have hnats : memB X (engelerD (A := A)) sqcap memB x X <=
  bigcup n : Nat, eqB x (check (A := A) (PSet.ofNat n)) :=
  (memB_le_iSup_check_ofNat (A := A) x).trans' hx?
have heq : memB X (engelerD (A := A)) sqcap memB x X =
  (memB X (engelerD (A := A)) sqcap memB x X) sqcap
  bigcup n : Nat, eqB x (check (A := A) (PSet.ofNat n)) :=
  (inf_eq_left.mpr hnats).symm
rw [heq, inf_iSup_eq]
refine iSup_le fun n => ?_
refine le_iSup_of_le (check (A := A) (finsetPSet {n})) ?_
have hsing : memB X (engelerD (A := A)) sqcap memB x X sqcap
  eqB x (check (A := A) (PSet.ofNat n)) <=
  subsetB (check (A := A) (finsetPSet ({n} : Finset Nat))) X := by
  rw [subsetB_finsetPSet]
  refine le_iInf fun m => ?_
  have hm : m.1 = n := Finset.mem_singleton.mp m.2
  rw [hm]
  exact (memB_eqB_left x X (check (A := A) (PSet.ofNat n))).trans' <|
  le_inf (inf_le_left.trans inf_le_right) inf_le_right
have hmem : memB X (engelerD (A := A)) sqcap memB x X sqcap
  eqB x (check (A := A) (PSet.ofNat n)) <=
  memB (check (A := A) (finsetPSet ({n} : Finset Nat)))
  (engelerGroundFins X) :=
  (memB_check_finsetPSet_engelerGroundFins {n} X).trans' hsing
have hxU : memB X (engelerD (A := A)) sqcap memB x X sqcap
  eqB x (check (A := A) (PSet.ofNat n)) <=
  memB x (check (A := A) (finsetPSet ({n} : Finset Nat))) := by
  have hmemn : memB (check (A := A) (PSet.ofNat n))
    (check (A := A) (finsetPSet ({n} : Finset Nat))) = top :=
    memB_check_of_mem (A := A) <<n, Finset.mem_singleton_self n>>, PSet.Equiv.rfl>
  exact (memB_eqB_left (check (A := A) (PSet.ofNat n))
    (check (A := A) (finsetPSet ({n} : Finset Nat))) x).trans' <|
  le_inf (le_top.trans hmemn.ge) (by rw [eqB_comm]; exact inf_le_right)
exact le_inf hmem hxU

theorem isSupRelB_engelerGroundFins [Nontrivial A]
  (X : AName.{u} A) :
  memB X (engelerD (A := A)) <=
  isSupRelB X (engelerGroundFins X) (engelerR (A := A)) := by
  unfold isSupRelB
  refine le_inf (isUpperBoundRelB_engelerGroundFins (A := A) X) ?_
  refine le_iInf fun Y => ?_
  rw [le_himp_iff, relB_engelerR]
  let t :=
    memB X (engelerD (A := A)) sqcap
    isUpperBoundRelB Y (engelerGroundFins X) (engelerR (A := A))
  change t <=
  memB X (engelerD (A := A)) sqcap memB Y (engelerD (A := A)) sqcap subsetB X Y
  have hXD : t <= memB X (engelerD (A := A)) := inf_le_left
  have hYD : t <= memB Y (engelerD (A := A)) :=
    (isUpperBoundRelB_le_memB Y (engelerGroundFins X)
      (engelerD (A := A))).trans' <|
  le_inf (le_top.trans (nonempty_engelerGroundFins (A := A) X).ge)
  inf_le_right

```

```

have hXs : t <= subsetB X (sUnionB (engelerGroundFins X)) :=
  (subsetB_engelerGroundFins_le_X (A := A) X).trans' inf_le_left
have hsY : t <= subsetB (sUnionB (engelerGroundFins X)) Y :=
  (subsetB_sUnionB_of_upperBound (engelerGroundFins X) Y).trans' <|
    (isUpperBoundRelB_le_isUpperBoundSubsetB Y (engelerGroundFins X)
      (engelerD (A := A))).trans' inf_le_right
have hXY : t <= subsetB X Y :=
  (AName.subsetB_trans X (sUnionB (engelerGroundFins X)) Y).trans' <|
    le_inf hXs hsY
exact le_inf (le_inf hXD hYD) hXY

theorem memB_engelerLamGraphName_le_D [Nontrivial A] (G : AName.{u} A) :
  memB (engelerLamGraphName G) (engelerD (A := A)) = top := by
  unfold engelerD
  rw [memB_powerB]
  exact subsetB_engelerLamGraphName_checkExt G

theorem memB_engelerC_le_isScottContinuous [Nontrivial A]
  (G : AName.{u} A) :
  memB G (engelerC (A := A)) <=
    isScottContinuousB G (engelerD (A := A)) (engelerD (A := A))
    (engelerR (A := A)) (engelerR (A := A)) := by
  rw [memB_engelerC]

theorem subsetB_engelerAppName_lam_le_eval [Nontrivial A]
  (G X Y : AName.{u} A) :
  memB G (engelerC (A := A)) sqcap memB X (engelerD (A := A)) sqcap
    memB (opairB X Y) G <=
    subsetB (engelerAppName (engelerLamGraphName G) X) Y := by
  rw [subsetB_eq_iInf]
  refine le_iInf fun q => ?_
  rw [le_himp_iff, memB_engelerAppName]
  let t :=
    memB G (engelerC (A := A)) sqcap memB X (engelerD (A := A)) sqcap
    memB (opairB X Y) G sqcap
    (memB q (check (A := A) PSet.omega) sqcap
      engelerAppPred (engelerLamGraphName G) X q)
  change t <= memB q Y
  have hq? : t <= memB q (check (A := A) PSet.omega) :=
    inf_le_right.trans inf_le_left
  have hnats : t <= bigcup n : Nat, eqB q (check (A := A) (PSet.ofNat n)) := by
    have hmk : memB q (check (A := A) PSet.omega) =
      bigcup n : ULift.{u} Nat,
      eqB q (check (A := A) (PSet.ofNat n.down)) sqcap (top : A) := by
      rw [check_omega_eq, memB_mk]
    rw [hmk] at hq?
    exact hq?.trans (iSup_le fun n =>
      le_iSup_of_le n.down inf_le_left)
  have heq : t = t sqcap bigcup n : Nat, eqB q (check (A := A) (PSet.ofNat n)) :=
    (inf_eq_left.mpr hnats).symm
  rw [heq, inf_iSup_eq]
  refine iSup_le fun n => ?_
  have hqapp : t sqcap eqB q (check (A := A) (PSet.ofNat n)) <=
    memB (check (A := A) (PSet.ofNat n))
    (engelerAppName (engelerLamGraphName G) X) :=
    (memB_eqB_left q (engelerAppName (engelerLamGraphName G) X)
      (check (A := A) (PSet.ofNat n))).trans' <|
    le_inf (by
      rw [memB_engelerAppName]
      exact inf_le_left.trans inf_le_right) inf_le_right
  have happ : t sqcap eqB q (check (A := A) (PSet.ofNat n)) <=
    bigcup K : Finset Nat, bigcup Z : AName.{u} A,
    subsetB (check (A := A) (finsetPSet K)) X sqcap

```

```

    memB (opairB (check (A := A) (finsetPSet K)) Z) G sqcap
    memB (check (PSet.ofNat n)) Z := by
  rw [memB_check_ofNat_app_lamGraph] at hqapp
  exact hqapp
have hland : t sqcap eqB q (check (A := A) (PSet.ofNat n)) =
  (t sqcap eqB q (check (A := A) (PSet.ofNat n))) sqcap
  bigcup K : Finset Nat, bigcup Z : AName.{u} A,
  subsetB (check (A := A) (finsetPSet K)) X sqcap
  memB (opairB (check (A := A) (finsetPSet K)) Z) G sqcap
  memB (check (PSet.ofNat n)) Z :=
  (inf_eq_left.mpr happ).symm
rw [hland, inf_iSup_eq]
refine iSup_le fun K => ?_
rw [inf_iSup_eq]
refine iSup_le fun Z => ?_
let r :=
  (t sqcap eqB q (check (A := A) (PSet.ofNat n))) sqcap
  (subsetB (check (A := A) (finsetPSet K)) X sqcap
  memB (opairB (check (A := A) (finsetPSet K)) Z) G sqcap
  memB (check (PSet.ofNat n)) Z)
change r <= memB q Y
have hGC : r <= memB G (engelerC (A := A)) :=
  inf_le_left.trans (inf_le_left.trans (inf_le_left.trans
    (inf_le_left.trans inf_le_left)))
have hXY : r <= memB (opairB X Y) G :=
  inf_le_left.trans (inf_le_left.trans (inf_le_left.trans inf_le_right))
have hKZ : r <=
  memB (opairB (check (A := A) (finsetPSet K)) Z) G :=
  inf_le_right.trans (inf_le_left.trans inf_le_right)
have hKX : r <= subsetB (check (A := A) (finsetPSet K)) X :=
  inf_le_right.trans (inf_le_left.trans inf_le_left)
have hnZ : r <= memB (check (PSet.ofNat n)) Z :=
  inf_le_right.trans inf_le_right
have hrelKX : r <=
  relB (engelerR (A := A)) (check (A := A) (finsetPSet K)) X := by
  rw [relB_engelerR]
  exact le_inf (le_inf
    (le_top.trans (memB_check_finsetPSet_engelerD (A := A) K).ge)
    (inf_le_left.trans (inf_le_left.trans
      (inf_le_left.trans (inf_le_left.trans inf_le_right))))) hKX
have hrelZY : r <= relB (engelerR (A := A)) Z Y :=
  (scottContinuous_apply_mono
    (memB_engelerC_le_isScottContinuous (A := A) G)
    (check (A := A) (finsetPSet K)) X Z Y).trans' <|
  le_inf (le_inf (le_inf hGC hKZ) hXY) hrelKX
have hsubZY : r <= subsetB Z Y := by
  have h := hrelZY
  rw [relB_engelerR] at h
  exact h.trans inf_le_right
have hnY : r <= memB (check (PSet.ofNat n)) Y :=
  (memB_of_subsetB (check (PSet.ofNat n)) Z Y).trans' (le_inf hnZ hsubZY)
exact (memB_eqB_left (check (A := A) (PSet.ofNat n)) Y q).trans' <|
  le_inf hnY (by rw [eqB_comm]; exact inf_le_left.trans inf_le_right)

theorem subsetB_eval_le_engelerAppName_lam [Nontrivial A]
  (G X Y : AName.{u} A) :
  memB G (engelerC (A := A)) sqcap memB X (engelerD (A := A)) sqcap
  memB (opairB X Y) G <=
  subsetB Y (engelerAppName (engelerLamGraphName G) X) := by
  let S := engelerGroundFins (A := A) X
  let Im := graphImageB G S (engelerD (A := A))
  let a :=
    memB G (engelerC (A := A)) sqcap memB X (engelerD (A := A)) sqcap

```

```

    memB (opairB X Y) G
have himg :
  a <=
    isDirectedRelB Im (engelerD (A := A)) (engelerR (A := A)) sqcap
    isSupRelB Y Im (engelerR (A := A)) :=
  (scottContinuous_image_sup (F := G) (S := S)
    (D := engelerD (A := A)) (E := engelerD (A := A))
    (R := engelerR (A := A)) (Q := engelerR (A := A)) X Y
    (memB_engelerC_le_isScottContinuous (A := A) G)).trans' <|
  le_inf (le_inf (le_inf
    (inf_le_left.trans inf_le_left)
    (le_top.trans (isDirectedRelB_engelerGroundFins (A := A) X).ge))
    ((isSupRelB_engelerGroundFins (A := A) X).trans'
    (inf_le_left.trans inf_le_right)))
  inf_le_right
have hdirI : a <=
  isDirectedRelB Im (engelerD (A := A)) (engelerR (A := A)) :=
  himg.trans inf_le_left
have hsupI : a <= isSupRelB Y Im (engelerR (A := A)) :=
  himg.trans inf_le_right
have hYs : a <= eqB Y (sUnionB Im) :=
  (isDirectedRelB_engeler_eqB_sUnion Im Y).trans' (le_inf hdirI hsupI)
rw [subsetB_eq_iInf]
refine le_iInf fun q => ?_
rw [le_himp_iff]
let s := a sqcap memB q Y
change s <= memB q (engelerAppName (engelerLamGraphName G) X)
have hqs : s <= memB q (sUnionB Im) :=
  (memB_eqB_right Y q (sUnionB Im)).trans'
  (le_inf inf_le_right (hYs.trans' inf_le_left))
have hex : s <= existsMemB q Im := by
  rw [← memB_sUnionB]
  exact hqs
unfold existsMemB at hex
have heq : s = s sqcap bigcup W, memB W Im sqcap memB q W :=
  (inf_eq_left.mpr hex).symm
rw [heq, inf_iSup_eq]
refine iSup_le fun W => ?_
have hWim : s sqcap (memB W Im sqcap memB q W) <= memB W Im :=
  inf_le_right.trans inf_le_left
have hqW : s sqcap (memB W Im sqcap memB q W) <= memB q W :=
  inf_le_right.trans inf_le_right
have hWmem : s sqcap (memB W Im sqcap memB q W) <=
  memB W (engelerD (A := A)) sqcap
  bigcup K, memB K S sqcap memB (opairB K W) G :=
  hWim.trans (le_of_eq (memB_graphImageB G S (engelerD (A := A)) W))
have hWD : s sqcap (memB W Im sqcap memB q W) <=
  memB W (engelerD (A := A)) :=
  hWmem.trans inf_le_left
have hKs : s sqcap (memB W Im sqcap memB q W) <=
  bigcup K, memB K S sqcap memB (opairB K W) G :=
  hWmem.trans inf_le_right
have hKeq : s sqcap (memB W Im sqcap memB q W) =
  (s sqcap (memB W Im sqcap memB q W)) sqcap
  bigcup K, memB K S sqcap memB (opairB K W) G :=
  (inf_eq_left.mpr hKs).symm
rw [hKeq, inf_iSup_eq]
refine iSup_le fun K => ?_
have hKS : (s sqcap (memB W Im sqcap memB q W)) sqcap
  (memB K S sqcap memB (opairB K W) G) <= memB K S :=
  inf_le_right.trans inf_le_left
have hKW : (s sqcap (memB W Im sqcap memB q W)) sqcap
  (memB K S sqcap memB (opairB K W) G) <= memB (opairB K W) G :=

```

```

inf_le_right.trans inf_le_right
have hKfin : (s sqcap (memB W Im sqcap memB q W)) sqcap
  (memB K S sqcap memB (opairB K W) G) <=
  memB K (engelerD (A := A)) sqcap engelerGroundFinPred X K :=
hKS.trans (le_of_eq (memB_engelerGroundFins X K))
have hKpred : (s sqcap (memB W Im sqcap memB q W)) sqcap
  (memB K S sqcap memB (opairB K W) G) <= engelerGroundFinPred X K :=
hKfin.trans inf_le_right
have hKp : (s sqcap (memB W Im sqcap memB q W)) sqcap
  (memB K S sqcap memB (opairB K W) G) =
  ((s sqcap (memB W Im sqcap memB q W)) sqcap
    (memB K S sqcap memB (opairB K W) G)) sqcap engelerGroundFinPred X K :=
  (inf_eq_left.mpr hKpred).symm
rw [hKp]
unfold engelerGroundFinPred
rw [inf_iSup_eq]
refine iSup_le fun K0 => ?_
let r :=
  ((s sqcap (memB W Im sqcap memB q W)) sqcap
    (memB K S sqcap memB (opairB K W) G)) sqcap
    (eqB K (check (A := A) (finsetPSet K0)) sqcap
      subsetB (check (A := A) (finsetPSet K0)) X)
change r <= memB q (engelerAppName (engelerLamGraphName G) X)
have hK0eq : r <= eqB K (check (A := A) (finsetPSet K0)) :=
  inf_le_right.trans inf_le_left
have hK0X : r <= subsetB (check (A := A) (finsetPSet K0)) X :=
  inf_le_right.trans inf_le_right
have hK0W : r <=
  memB (opairB (check (A := A) (finsetPSet K0)) W) G :=
  (memB_opairB_congr G K (check (A := A) (finsetPSet K0)) W W).trans' <|
  le_inf (le_inf hK0eq (le_top.trans (eqB_self _).ge))

```

Lean 4 source (lines 3201–3600)

```

  (inf_le_left.trans (inf_le_right.trans inf_le_right))
have hqW' : r <= memB q W :=
  hqW.trans' (inf_le_left.trans inf_le_left)
have hWD' : r <= memB W (engelerD (A := A)) :=
  hWD.trans' (inf_le_left.trans inf_le_left)
have hq? : r <= memB q (checkExt (A := A) PSet.omega) :=
  (memB_of_subsetB q W (checkExt (A := A) PSet.omega)).trans' <|
  le_inf hqW' (by
    have h : memB W (engelerD (A := A)) =
      subsetB W (checkExt (A := A) PSet.omega) := by
        unfold engelerD
        exact memB_powerB W _
    rw [h] at hWD'
    exact hWD')
have hnata : r <= bigcup n : Nat, eqB q (check (A := A) (PSet.ofNat n)) :=
  (memB_le_iSup_check_ofNat (A := A) q).trans' hq?
have hrn : r = r sqcap bigcup n : Nat, eqB q (check (A := A) (PSet.ofNat n)) :=
  (inf_eq_left.mpr hnata).symm
rw [hrn, inf_iSup_eq]
refine iSup_le fun n => ?_
have hnW : r sqcap eqB q (check (A := A) (PSet.ofNat n)) <=
  memB (check (A := A) (PSet.ofNat n)) W :=
  (memB_eqB_left q W (check (A := A) (PSet.ofNat n))).trans' <|
  le_inf (hqW'.trans' inf_le_left) inf_le_right
have happn : r sqcap eqB q (check (A := A) (PSet.ofNat n)) <=
  memB (check (A := A) (PSet.ofNat n))
  (engelerAppName (engelerLamGraphName G) X) := by
  rw [memB_check_ofNat_app_lamGraph]
  exact le_iSup_of_le K0 (le_iSup_of_le W
    (le_inf (le_inf (hK0X.trans' inf_le_left) (hK0W.trans' inf_le_left))

```

```

    hnW))
exact (memB_eqB_left (check (A := A) (PSet.ofNat n))
  (engelerAppName (engelerLamGraphName G) X) q).trans' <|
  le_inf happn (by rw [eqB_comm]; exact inf_le_right)

theorem eqB_engelerAppName_lam_eval [Nontrivial A]
  (G X Y : AName.{u} A) :
  memB G (engelerC (A := A)) sqcap memB X (engelerD (A := A)) sqcap
  memB (opairB X Y) G <=
  eqB Y (engelerAppName (engelerLamGraphName G) X) := by
  rw [eqB_eq_subset]
  exact le_inf
  (subsetB_eval_le_engelerAppName_lam (A := A) G X Y)
  (subsetB_engelerAppName_lam_le_eval (A := A) G X Y)

theorem memB_opairB_appGraph_lam_le [Nontrivial A]
  (G X Y : AName.{u} A) :
  memB G (engelerC (A := A)) sqcap
  memB (opairB X Y)
  (engelerAppGraph (A := A) (engelerLamGraphName G)) <=
  memB (opairB X Y) G := by
  let t :=
    memB G (engelerC (A := A)) sqcap
    memB (opairB X Y)
    (engelerAppGraph (A := A) (engelerLamGraphName G))
  have hall : t <=
    memB X (engelerD (A := A)) sqcap memB Y (engelerD (A := A)) sqcap
    eqB Y (engelerAppName (engelerLamGraphName G) X) :=
    (engelerAppGraph_mem_le_eqB (A := A) (engelerLamGraphName G) X Y).trans'
    inf_le_right
  have hXD : t <= memB X (engelerD (A := A)) :=
    hall.trans (inf_le_left.trans inf_le_left)
  have hYeq : t <= eqB Y (engelerAppName (engelerLamGraphName G) X) :=
    hall.trans inf_le_right
  have htot : t <= bigcup Z, memB (opairB X Z) G :=
    (isTotalB_apply G (engelerD (A := A)) X).trans' <|
    le_inf ((memB_engelerC_le_isTotal (A := A) G).trans' inf_le_left) hXD
  have ht : t = t sqcap bigcup Z, memB (opairB X Z) G :=
    (inf_eq_left.mpr htot).symm
  change t <= memB (opairB X Y) G
  rw [ht, inf_iSup_eq]
  refine iSup_le fun Z => ?_
  have hXZ : t sqcap memB (opairB X Z) G <= memB (opairB X Z) G :=
    inf_le_right
  have hZeq : t sqcap memB (opairB X Z) G <=
    eqB Z (engelerAppName (engelerLamGraphName G) X) :=
    (eqB_engelerAppName_lam_eval (A := A) G X Z).trans' <|
    le_inf (le_inf (inf_le_left.trans inf_le_left) (hXD.trans' inf_le_left))
    hXZ
  have hYZ : t sqcap memB (opairB X Z) G <= eqB Y Z :=
    (eqB_trans Y (engelerAppName (engelerLamGraphName G) X) Z).trans' <|
    le_inf (hYeq.trans' inf_le_left) (by rw [eqB_comm]; exact hZeq)
  exact (memB_opairB_congr G X X Z Y).trans' <|
    le_inf (le_inf (le_top.trans (eqB_self _).ge)
      (by rw [eqB_comm]; exact hYZ)) hXZ

theorem subsetB_engelerAppGraph_lam_le [Nontrivial A]
  (G : AName.{u} A) :
  memB G (engelerC (A := A)) <=
  subsetB (engelerAppGraph (A := A) (engelerLamGraphName G)) G := by
  refine subsetB_of_same_pairs
  (le_top.trans (isFunctionB_subset
    (isFunctionB_engelerAppGraph (A := A)

```

```

      (engelerLamGraphName G))).ge) fun x y => ?_
exact (memB_opairB_appGraph_lam_le (A := A) G x y).trans' <|
  le_inf (inf_le_left.trans inf_le_left) inf_le_right

theorem subsetB_engelerAppGraph_lam_ge [Nontrivial A]
  (G : AName.{u} A) :
  memB G (engelerC (A := A)) <=
    subsetB G (engelerAppGraph (A := A) (engelerLamGraphName G)) := by
  refine subsetB_of_same_pairs
    (memB_engelerC_le_subsetB_prod (A := A) G) fun x y => ?_
  have hYeq : memB G (engelerC (A := A)) sqcap memB x (engelerD (A := A)) sqcap
    memB (opairB x y) G <=
    eqB y (engelerAppName (engelerLamGraphName G) x) :=
    (eqB_engelerAppName_lam_eval (A := A) G x y).trans' <|
    le_inf (le_inf (inf_le_left.trans inf_le_left) (inf_le_left.trans inf_le_right))
      inf_le_right
  have hyD : memB G (engelerC (A := A)) sqcap memB x (engelerD (A := A)) sqcap
    memB (opairB x y) G <= memB y (engelerD (A := A)) :=
    (local_function_edge_le_codomain
      (memB_engelerC_le_isFunction (A := A) G) x y).trans' <|
    le_inf (inf_le_left.trans inf_le_left) inf_le_right
  exact (le_memB_opairB_engelerAppGraph (A := A) (engelerLamGraphName G) x y).trans' <|
    le_inf (le_inf (inf_le_left.trans inf_le_right) hyD) hYeq

theorem eqB_engelerAppGraph_lam [Nontrivial A] (G : AName.{u} A) :
  memB G (engelerC (A := A)) <=
    eqB (engelerAppGraph (A := A) (engelerLamGraphName G)) G := by
  rw [eqB_eq_subset]
  exact le_inf
    (subsetB_engelerAppGraph_lam_le (A := A) G)
    (subsetB_engelerAppGraph_lam_ge (A := A) G)

theorem memB_comp_engelerFun_lam_le [Nontrivial A]
  (G H : AName.{u} A) :
  memB (opairB G H)
    (compB (engelerFun (A := A)) (engelerLamB (A := A))
      (engelerC (A := A)) (engelerC (A := A))) <=
    memB G (engelerC (A := A)) sqcap eqB G H := by
  refine (memB_opairB_compB_le (engelerFun (A := A))
    (engelerLamB (A := A)) (engelerC (A := A)) (engelerC (A := A))
    G H).trans ?_
  refine iSup_le fun L => ?_
  have hLam : memB (opairB G L) (engelerLamB (A := A)) sqcap
    memB (opairB L H) (engelerFun (A := A)) <=
    memB G (engelerC (A := A)) sqcap memB L (engelerD (A := A)) sqcap
    eqB L (engelerLamGraphName G) :=
    (engelerLamB_mem_le_eqB (A := A) G L).trans' inf_le_left
  have hFun : memB (opairB G L) (engelerLamB (A := A)) sqcap
    memB (opairB L H) (engelerFun (A := A)) <=
    memB L (engelerD (A := A)) sqcap memB H (engelerC (A := A)) sqcap
    eqB H (engelerAppGraph (A := A) L) :=
    (engelerFun_mem_le_eqB (A := A) L H).trans' inf_le_right
  have hGC : memB (opairB G L) (engelerLamB (A := A)) sqcap
    memB (opairB L H) (engelerFun (A := A)) <=
    memB G (engelerC (A := A)) :=
    hLam.trans (inf_le_left.trans inf_le_left)
  have hLeq : memB (opairB G L) (engelerLamB (A := A)) sqcap
    memB (opairB L H) (engelerFun (A := A)) <=
    eqB L (engelerLamGraphName G) :=
    hLam.trans inf_le_right
  have hHeq : memB (opairB G L) (engelerLamB (A := A)) sqcap
    memB (opairB L H) (engelerFun (A := A)) <=
    eqB H (engelerAppGraph (A := A) L) :=

```

```

hFun.trans inf_le_right
have happ : memB (opairB G L) (engelerLamB (A := A)) sqcap
  memB (opairB L H) (engelerFun (A := A)) <=
  eqB (engelerAppGraph (A := A) L)
    (engelerAppGraph (A := A) (engelerLamGraphName G)) :=
  (engelerAppGraph_congr (A := A) L (engelerLamGraphName G)).trans' hLeq
have hGapp : memB (opairB G L) (engelerLamB (A := A)) sqcap
  memB (opairB L H) (engelerFun (A := A)) <=
  eqB (engelerAppGraph (A := A) (engelerLamGraphName G)) G :=
  (eqB_engelerAppGraph_lam (A := A) G).trans' hGC
have hHG : memB (opairB G L) (engelerLamB (A := A)) sqcap
  memB (opairB L H) (engelerFun (A := A)) <= eqB H G :=
  (eqB_trans H (engelerAppGraph (A := A) L) G).trans' <|
  le_inf hHeq
  ((eqB_trans (engelerAppGraph (A := A) L)
    (engelerAppGraph (A := A) (engelerLamGraphName G)) G).trans' <|
  le_inf happ hGapp)
exact le_inf hGC (by rw [eqB_comm]; exact hHG)

theorem le_memB_comp_engelerFun_lam [Nontrivial A]
  (G H : AName.{u} A) :
  memB G (engelerC (A := A)) sqcap eqB G H <=
  memB (opairB G H)
    (compB (engelerFun (A := A)) (engelerLamB (A := A))
      (engelerC (A := A)) (engelerC (A := A))) := by
have hLam : memB G (engelerC (A := A)) <=
  memB (opairB G (engelerLamGraphName G)) (engelerLamB (A := A)) :=
  (le_memB_opairB_engelerLamB (A := A) G (engelerLamGraphName G)).trans' <|
  le_inf (le_inf le_rfl
    (le_top.trans (memB_engelerLamGraphName_le_D (A := A) G).ge))
    (le_top.trans (eqB_self _).ge)
have hHC : memB G (engelerC (A := A)) sqcap eqB G H <=
  memB H (engelerC (A := A)) :=
  (memB_eqB_left G (engelerC (A := A)) H).trans' <|
  le_inf inf_le_left inf_le_right
have happ : memB G (engelerC (A := A)) <=
  eqB G (engelerAppGraph (A := A) (engelerLamGraphName G)) := by
  rw [eqB_comm]
  exact eqB_engelerAppGraph_lam (A := A) G
have hHeq : memB G (engelerC (A := A)) sqcap eqB G H <=
  eqB H (engelerAppGraph (A := A) (engelerLamGraphName G)) :=
  (eqB_trans H G
    (engelerAppGraph (A := A) (engelerLamGraphName G))).trans' <|
  le_inf (by rw [eqB_comm]; exact inf_le_right) (happ.trans' inf_le_left)
have hFun : memB G (engelerC (A := A)) sqcap eqB G H <=
  memB (opairB (engelerLamGraphName G) H) (engelerFun (A := A)) :=
  (le_memB_opairB_engelerFun (A := A) (engelerLamGraphName G) H).trans' <|
  le_inf (le_inf
    (le_top.trans (memB_engelerLamGraphName_le_D (A := A) G).ge) hHC)
    hHeq
exact (le_memB_opairB_compB (engelerFun (A := A)) (engelerLamB (A := A))
  (engelerC (A := A)) (engelerD (A := A)) (engelerC (A := A))
  G (engelerLamGraphName G) H
  (isFunctionB_subset (isFunctionB_engelerLamB (A := A)))
  (isFunctionB_subset (isFunctionB_engelerFun (A := A)))).trans' <|
  le_inf (hLam.trans' inf_le_left) hFun

theorem eqB_comp_engelerFun_engelerLamB [Nontrivial A] :
  eqB (compB (engelerFun (A := A)) (engelerLamB (A := A))
    (engelerC (A := A)) (engelerC (A := A)))
    (idB (engelerC (A := A))) = top := by
  refine eqB_top_of_function_matrix
    (isFunctionB_comp (isFunctionB_engelerLamB (A := A))

```



```

      (isFunctionB_engelerFun (A := A)))
      (isFunctionB_id (engelerC (A := A))) fun i j => ?_
rw [memB_opairB_idB]
refine le_antisymm ?le ?ge
* exact memB_comp_engelerFun_lam_le (A := A)
  ((engelerC (A := A)).child i) ((engelerC (A := A)).child j)
* exact le_memB_comp_engelerFun_lam (A := A)
  ((engelerC (A := A)).child i) ((engelerC (A := A)).child j)

theorem engelerLamB_mapsToSup_upper [Nontrivial A]
  (S x y G L : AName.{u} A) :
  isDirectedRelB S (engelerC (A := A)) (engelerQ (A := A)) sqcap
  isSupRelB x S (engelerQ (A := A)) sqcap
  memB (opairB x y) (engelerLamB (A := A)) sqcap
  memB G S sqcap
  memB (opairB G L) (engelerLamB (A := A)) <=
  relB (engelerR (A := A)) L y := by
let t :=
  isDirectedRelB S (engelerC (A := A)) (engelerQ (A := A)) sqcap
  isSupRelB x S (engelerQ (A := A)) sqcap
  memB (opairB x y) (engelerLamB (A := A)) sqcap
  memB G S sqcap
  memB (opairB G L) (engelerLamB (A := A))
have hup : t <= isUpperBoundRelB x S (engelerQ (A := A)) :=
  inf_le_left.trans (inf_le_left.trans (inf_le_left.trans inf_le_right))
  |>.trans inf_le_left
have hGx : t <= relB (engelerQ (A := A)) G x :=
  (isUpperBoundRelB_apply x S (engelerQ (A := A)) G).trans' <|
  le_inf hup (inf_le_left.trans inf_le_right)
exact (engelerLamB_mono (A := A) G x L y).trans' <|
  le_inf (le_inf (inf_le_right)
    (inf_le_left.trans (inf_le_left.trans inf_le_right))) hGx

theorem memB_opairB_of_pointwiseLe_antisymm [Nontrivial A]
  (F G x y : AName.{u} A) :
  memB F (engelerC (A := A)) sqcap memB G (engelerC (A := A)) sqcap
  pointwiseLeB F G (engelerD (A := A)) (engelerR (A := A)) sqcap
  pointwiseLeB G F (engelerD (A := A)) (engelerR (A := A)) sqcap
  memB x (engelerD (A := A)) sqcap memB (opairB x y) F <=
  memB (opairB x y) G := by
let t :=
  memB F (engelerC (A := A)) sqcap memB G (engelerC (A := A)) sqcap
  pointwiseLeB F G (engelerD (A := A)) (engelerR (A := A)) sqcap
  pointwiseLeB G F (engelerD (A := A)) (engelerR (A := A)) sqcap
  memB x (engelerD (A := A)) sqcap memB (opairB x y) F
change t <= memB (opairB x y) G
have hF : t <= memB F (engelerC (A := A)) :=
  inf_le_left.trans (inf_le_left.trans
    (inf_le_left.trans (inf_le_left.trans inf_le_left)))
have hG : t <= memB G (engelerC (A := A)) :=
  inf_le_left.trans (inf_le_left.trans
    (inf_le_left.trans (inf_le_left.trans inf_le_right)))
have hpwFG : t <=
  pointwiseLeB F G (engelerD (A := A)) (engelerR (A := A)) :=
  inf_le_left.trans (inf_le_left.trans
    (inf_le_left.trans inf_le_right))
have hpwGF : t <=
  pointwiseLeB G F (engelerD (A := A)) (engelerR (A := A)) :=
  inf_le_left.trans (inf_le_left.trans inf_le_right)
have hx : t <= memB x (engelerD (A := A)) :=
  inf_le_left.trans inf_le_right
have hFy : t <= memB (opairB x y) F :=
  inf_le_right

```

```

have htot : t <= bigcup z, memB (opairB x z) G :=
  (isTotalB_apply G (engelerD (A := A)) x).trans' <|
  le_inf ((memB_engelerC_le_isTotal (A := A) G).trans' hG) hx
have ht : t = t sqcap bigcup z, memB (opairB x z) G :=
  (inf_eq_left.mpr htot).symm
rw [ht, inf_iSup_eq]
refine iSup_le fun z => ?_
let s := t sqcap memB (opairB x z) G
change s <= memB (opairB x y) G
have hsT : s <= t := inf_le_left
have hxz : s <= memB (opairB x z) G := inf_le_right
have hxy : s <= memB (opairB x y) F := hsT.trans hFy
have hxD : s <= memB x (engelerD (A := A)) := hsT.trans hx
have hrelYZ : s <= relB (engelerR (A := A)) y z := by
  have hp := iInf_le (fun X' : AName.{u} A =>
    ? Y' : AName.{u} A, ? Z' : AName.{u} A,
    memB X' (engelerD (A := A)) sqcap
    memB (opairB X' Y') F sqcap memB (opairB X' Z') G ?
    relB (engelerR (A := A)) Y' Z') x
  have hpY := (iInf_le (fun Y' : AName.{u} A =>
    ? Z' : AName.{u} A,
    memB x (engelerD (A := A)) sqcap
    memB (opairB x Y') F sqcap memB (opairB x Z') G ?
    relB (engelerR (A := A)) Y' Z') y).trans' hp
  have hpZ := (iInf_le (fun Z' : AName.{u} A =>
    memB x (engelerD (A := A)) sqcap
    memB (opairB x y) F sqcap memB (opairB x Z') G ?
    relB (engelerR (A := A)) y Z') z).trans' hpY
  exact (le_himp_iff.mp ((hsT.trans hpwFG).trans hpZ)).trans' <|
  le_inf le_rfl (le_inf (le_inf hxD hxy) hxz)
have hrelZY : s <= relB (engelerR (A := A)) z y := by
  have hp := iInf_le (fun X' : AName.{u} A =>
    ? Y' : AName.{u} A, ? Z' : AName.{u} A,
    memB X' (engelerD (A := A)) sqcap
    memB (opairB X' Y') G sqcap memB (opairB X' Z') F ?
    relB (engelerR (A := A)) Y' Z') x
  have hpY := (iInf_le (fun Y' : AName.{u} A =>
    ? Z' : AName.{u} A,
    memB x (engelerD (A := A)) sqcap
    memB (opairB x Y') G sqcap memB (opairB x Z') F ?
    relB (engelerR (A := A)) Y' Z') z).trans' hp
  have hpZ := (iInf_le (fun Z' : AName.{u} A =>
    memB x (engelerD (A := A)) sqcap
    memB (opairB x z) G sqcap memB (opairB x Z') F ?
    relB (engelerR (A := A)) z Z') y).trans' hpY
  exact (le_himp_iff.mp ((hsT.trans hpwGF).trans hpZ)).trans' <|
  le_inf le_rfl (le_inf (le_inf hxD hxz) hxy)
have hyz : s <= eqB y z := by
  have h1 := hrelYZ
  have h2 := hrelZY
  rw [relB_engelerR] at h1 h2
  exact (eqB_eq_subset y z |> le_inf (h1.trans inf_le_right)
    (h2.trans inf_le_right))
exact (memB_opairB_congr G x x z y).trans' <|
  le_inf (le_inf (le_top.trans (eqB_self (A := A) x).ge)
    (by rw [eqB_comm]; exact hyz)) hxz

theorem eqB_of_relB_engelerQ_antisymm [Nontrivial A]
  (F G : AName.{u} A) :
  relB (engelerQ (A := A)) F G sqcap relB (engelerQ (A := A)) G F <=
  eqB F G := by
  let t :=
    relB (engelerQ (A := A)) F G sqcap relB (engelerQ (A := A)) G F

```

```

change t <= eqB F G
have hFG : t <= relB (engelerQ (A := A)) F G := inf_le_left
have hGF : t <= relB (engelerQ (A := A)) G F := inf_le_right
have hF : t <= memB F (engelerC (A := A)) := by
  have h := hFG
  rw [relB_engelerQ] at h
  exact h.trans (inf_le_left.trans inf_le_left)
have hG : t <= memB G (engelerC (A := A)) := by
  have h := hFG
  rw [relB_engelerQ] at h
  exact h.trans (inf_le_left.trans inf_le_right)
have hpwFG : t <=
  pointwiseLeB F G (engelerD (A := A)) (engelerR (A := A)) := by
  have h := hFG
  rw [relB_engelerQ] at h
  exact h.trans inf_le_right
have hpwGF : t <=
  pointwiseLeB G F (engelerD (A := A)) (engelerR (A := A)) := by
  have h := hGF
  rw [relB_engelerQ] at h
  exact h.trans inf_le_right
have hsubF : t <=
  subsetB F (prodB (engelerD (A := A)) (engelerD (A := A))) :=
  (memB_engelerC_le_subsetB_prod (A := A) F).trans' hF
have hsubG : t <=
  subsetB G (prodB (engelerD (A := A)) (engelerD (A := A))) :=
  (memB_engelerC_le_subsetB_prod (A := A) G).trans' hG
have hsameFG (x y : AName.{u} A) :
  t sqcap memB x (engelerD (A := A)) sqcap memB (opairB x y) F <=
  memB (opairB x y) G :=
  (memB_opairB_of_pointwiseLe_antisymm (A := A) F G x y).trans' <|
  le_inf (le_inf (le_inf (le_inf (le_inf
    (inf_le_left.trans (inf_le_left.trans hF))
    (inf_le_left.trans (inf_le_left.trans hG))
    (inf_le_left.trans (inf_le_left.trans hpwFG))
    (inf_le_left.trans (inf_le_left.trans hpwGF))
    (inf_le_left.trans inf_le_right))
    inf_le_right
  have hsameGF (x y : AName.{u} A) :
  t sqcap memB x (engelerD (A := A)) sqcap memB (opairB x y) G <=
  memB (opairB x y) F :=
  (memB_opairB_of_pointwiseLe_antisymm (A := A) G F x y).trans' <|
  le_inf (le_inf (le_inf (le_inf (le_inf
    (inf_le_left.trans (inf_le_left.trans hG))
    (inf_le_left.trans (inf_le_left.trans hF))
    (inf_le_left.trans (inf_le_left.trans hpwGF))
    (inf_le_left.trans (inf_le_left.trans hpwFG))
    (inf_le_left.trans inf_le_right))
    inf_le_right
  rw [eqB_eq_subset]
  exact le_inf
  (subsetB_of_same_pairs hsubF hsameFG)
  (subsetB_of_same_pairs hsubG hsameGF)

```

theorem eqB_of_isSupRelB_engelerQ [Nontrivial A]

Lean 4 source (lines 3601–4000)

```

(x y S : AName.{u} A) :
isSupRelB x S (engelerQ (A := A)) sqcap
isSupRelB y S (engelerQ (A := A)) <=
eqB x y :=
(eqB_of_relB_engelerQ_antisymm (A := A) x y).trans' <|
le_inf (isSupRelB_le_relB x y S (engelerQ (A := A)))

```

```

((isSupRelB_le_relB y x S (engelerQ (A := A))).trans'
 (le_inf inf_le_right inf_le_left))

theorem isDirectedRelB_engelerLamB_image [Nontrivial A]
  (S : AName.{u} A) :
  isDirectedRelB S (engelerC (A := A)) (engelerQ (A := A)) <=
  isDirectedRelB
    (graphImageB (engelerLamB (A := A)) S (engelerD (A := A)))
    (engelerD (A := A)) (engelerR (A := A)) := by
  have hmono (x x' y y' : AName.{u} A) :
    top sqcap memB (opairB x y) (engelerLamB (A := A)) sqcap
      memB (opairB x' y') (engelerLamB (A := A)) sqcap
        relB (engelerQ (A := A)) x x' <=
        relB (engelerR (A := A)) y y' := by
    rw [top_inf_eq]
    exact engelerLamB_mono (A := A) x x' y y'
  have h := isDirectedRelB_graphImageB
    (F := engelerLamB (A := A)) (S := S)
    (D := engelerC (A := A)) (E := engelerD (A := A))
    (R := engelerQ (A := A)) (Q := engelerR (A := A))
    (le_of_eq (isFunctionB_engelerLamB (A := A)).symm) hmono
  rw [top_inf_eq] at h
  exact h

theorem subsetB_engelerLamB_image [Nontrivial A] (S : AName.{u} A) :
  subsetB (graphImageB (engelerLamB (A := A)) S (engelerD (A := A)))
    (engelerD (A := A)) = top :=
  subsetB_sepB _ _

theorem isSupRelB_sUnion_engelerLamB_image [Nontrivial A]
  (S : AName.{u} A) :
  isDirectedRelB S (engelerC (A := A)) (engelerQ (A := A)) <=
  memB (sUnionB
    (graphImageB (engelerLamB (A := A)) S (engelerD (A := A))))
    (engelerD (A := A)) sqcap
  isSupRelB
    (sUnionB
      (graphImageB (engelerLamB (A := A)) S (engelerD (A := A)))
      (graphImageB (engelerLamB (A := A)) S (engelerD (A := A)))
      (engelerR (A := A)) := by
    have hdir := isDirectedRelB_engelerLamB_image (A := A) S
    exact (isSupRelB_sUnionB_powerB
      (graphImageB (engelerLamB (A := A)) S (engelerD (A := A)))
      (checkExt (A := A) PSet.omega)).trans' <|
    le_inf
      (le_top.trans (subsetB_engelerLamB_image (A := A) S).ge)
      ((isDirectedRelB_le_nonempty
        (graphImageB (engelerLamB (A := A)) S (engelerD (A := A)))
        (engelerD (A := A)) (engelerR (A := A))).trans' hdir)

theorem le_memB_opairB_engelerFun_sUnion [Nontrivial A]
  (S : AName.{u} A) :
  memB (sUnionB
    (graphImageB (engelerLamB (A := A)) S (engelerD (A := A))))
    (engelerD (A := A)) <=
  memB (opairB
    (sUnionB
      (graphImageB (engelerLamB (A := A)) S (engelerD (A := A)))
      (engelerAppGraph (A := A)
        (sUnionB
          (graphImageB (engelerLamB (A := A)) S
            (engelerD (A := A)))))))
    (engelerFun (A := A)) :=

```

```

(le_memB_opairB_engelerFun (A := A)
  (sUnionB
    (graphImageB (engelerLamB (A := A)) S (engelerD (A := A))))
  (engelerAppGraph (A := A)
    (sUnionB
      (graphImageB (engelerLamB (A := A)) S
        (engelerD (A := A))))).trans' <|
le_inf (le_inf le_rfl
  (le_top.trans
    (memB_engelerC_engelerAppGraph (A := A) _).ge))
  (le_top.trans (eqB_self _).ge)

theorem subsetB_S_le_funImage_lamImage [Nontrivial A]
  (S : AName.{u} A) :
  subsetB S (engelerC (A := A)) <=
  subsetB S
    (graphImageB (engelerFun (A := A))
      (graphImageB (engelerLamB (A := A)) S (engelerD (A := A)))
      (engelerC (A := A))) := by
rw [subsetB_eq_iInf S
  (graphImageB (engelerFun (A := A))
    (graphImageB (engelerLamB (A := A)) S (engelerD (A := A)))
    (engelerC (A := A)))]
refine le_iInf fun G => ?_
rw [le_himp_iff, memB_graphImageB]
let t := subsetB S (engelerC (A := A)) sqcap memB G S
change t <=
  memB G (engelerC (A := A)) sqcap
  bigcup L : AName.{u} A,
    memB L (graphImageB (engelerLamB (A := A)) S (engelerD (A := A))) sqcap
    memB (opairB L G) (engelerFun (A := A))
have hGC : t <= memB G (engelerC (A := A)) :=
  (memB_of_subsetB G S (engelerC (A := A))).trans' <|
  le_inf inf_le_right inf_le_left
have hLam : t <=
  memB (opairB G (engelerLamGraphName G)) (engelerLamB (A := A)) :=
  (le_memB_opairB_engelerLamB (A := A) G (engelerLamGraphName G)).trans' <|
  le_inf (le_inf hGC
    (le_top.trans (memB_engelerLamGraphName_le_D (A := A) G).ge))
    (le_top.trans (eqB_self _).ge)
have hLD : t <= memB (engelerLamGraphName G) (engelerD (A := A)) :=
  le_top.trans (memB_engelerLamGraphName_le_D (A := A) G).ge
have hLT : t <=
  memB (engelerLamGraphName G)
    (graphImageB (engelerLamB (A := A)) S (engelerD (A := A))) := by
rw [memB_graphImageB]
refine le_inf hLD (le_iSup_of_le G (le_inf inf_le_right hLam))
have happ : t <=
  eqB G (engelerAppGraph (A := A) (engelerLamGraphName G)) := by
rw [eqB_comm]
exact (eqB_engelerAppGraph_lam (A := A) G).trans' hGC
have hFun : t <=
  memB (opairB (engelerLamGraphName G) G) (engelerFun (A := A)) :=
  (le_memB_opairB_engelerFun (A := A) (engelerLamGraphName G) G).trans' <|
  le_inf (le_inf hLD hGC) happ
exact le_inf hGC (le_iSup_of_le (engelerLamGraphName G) (le_inf hLT hFun))

theorem memB_lam_fun_le_eqB [Nontrivial A]
  (G L H : AName.{u} A) :
  memB (opairB G L) (engelerLamB (A := A)) sqcap
  memB (opairB L H) (engelerFun (A := A)) <=
  memB G (engelerC (A := A)) sqcap eqB H G := by
have hcomp :

```

```

    memB (opairB G L) (engelerLamB (A := A)) sqcap
      memB (opairB L H) (engelerFun (A := A)) <=
        memB G (engelerC (A := A)) sqcap eqB G H :=
(memB_comp_engelerFun_lam_le (A := A) G H).trans' <|
  le_memB_opairB_compB (engelerFun (A := A)) (engelerLamB (A := A))
    (engelerC (A := A)) (engelerD (A := A)) (engelerC (A := A))
    G L H
    (isFunctionB_subset (isFunctionB_engelerLamB (A := A)))
    (isFunctionB_subset (isFunctionB_engelerFun (A := A)))
exact le_inf (hcomp.trans inf_le_left)
  (by rw [eqB_comm]; exact hcomp.trans inf_le_right)

theorem subsetB_funImage_lamImage_le_S [Nontrivial A]
  (S : AName.{u} A) :
  subsetB
    (graphImageB (engelerFun (A := A))
      (graphImageB (engelerLamB (A := A)) S (engelerD (A := A)))
      (engelerC (A := A)))
  S = top := by
rw [subsetB_eq_iInf]
refine iInf_eq_top.mpr fun H => himp_eq_top_iff.mpr ?_
rw [memB_graphImageB]
rw [inf_iSup_eq]
refine iSup_le fun L => ?_
let t0 :=
  memB H (engelerC (A := A)) sqcap
    (memB L
      (graphImageB (engelerLamB (A := A)) S (engelerD (A := A))) sqcap
      memB (opairB L H) (engelerFun (A := A)))
change t0 <= memB H S
have hsup : t0 <=
  bigcup G : AName.{u} A,
    memB G S sqcap memB (opairB G L) (engelerLamB (A := A)) :=
  (inf_le_right.trans inf_le_left).trans
    ((le_of_eq (memB_graphImageB (engelerLamB (A := A)) S
      (engelerD (A := A)) L)).trans inf_le_right)
have ht0 : t0 = t0 sqcap
  bigcup G : AName.{u} A,
    memB G S sqcap memB (opairB G L) (engelerLamB (A := A)) :=
  (inf_eq_left.mpr hsup).symm
rw [ht0, inf_iSup_eq]
refine iSup_le fun G => ?_
let t :=
  t0 sqcap (memB G S sqcap memB (opairB G L) (engelerLamB (A := A)))
change t <= memB H S
have hcomp : t <=
  memB G (engelerC (A := A)) sqcap eqB H G :=
  (memB_lam_fun_le_eqB (A := A) G L H).trans' <|
  le_inf
    (inf_le_right.trans inf_le_right)
    (inf_le_left.trans (inf_le_right.trans inf_le_right))
exact (memB_eqB_left G S H).trans' <|
  le_inf (inf_le_right.trans inf_le_left)
    (by rw [eqB_comm]; exact hcomp.trans inf_le_right)

theorem eqB_funImage_lamImage [Nontrivial A]
  (S : AName.{u} A) :
  subsetB S (engelerC (A := A)) <=
  eqB
    (graphImageB (engelerFun (A := A))
      (graphImageB (engelerLamB (A := A)) S (engelerD (A := A)))
      (engelerC (A := A)))
  S := by

```

```

rw [eqB_eq_subset]
exact le_inf
  (le_top.trans (subsetB_funImage_lamImage_le_S (A := A) S).ge)
  (subsetB_S_le_funImage_lamImage (A := A) S)

theorem isSupRelB_appGraph_sUnion_lamImage [Nontrivial A]
  (S : AName.{u} A) :
  isDirectedRelB S (engelerC (A := A)) (engelerQ (A := A)) <=
    isSupRelB
      (engelerAppGraph (A := A)
        (sUnionB
          (graphImageB (engelerLamB (A := A)) S
            (engelerD (A := A))))))
    S (engelerQ (A := A)) := by
let T := graphImageB (engelerLamB (A := A)) S (engelerD (A := A))
let z := sUnionB T
have hdirT : isDirectedRelB S (engelerC (A := A)) (engelerQ (A := A)) <=
  isDirectedRelB T (engelerD (A := A)) (engelerR (A := A)) :=
  isDirectedRelB_engelerLamB_image (A := A) S
have hsupT : isDirectedRelB S (engelerC (A := A)) (engelerQ (A := A)) <=
  memB z (engelerD (A := A)) sqcap
  isSupRelB z T (engelerR (A := A)) :=
  isSupRelB_sUnion_engelerLamB_image (A := A) S
have hFun : isDirectedRelB S (engelerC (A := A)) (engelerQ (A := A)) <=
  memB (opairB z (engelerAppGraph (A := A) z))
    (engelerFun (A := A)) :=
  (le_memB_opairB_engelerFun_sUnion (A := A) S).trans'
  (hsupT.trans inf_le_left)
have hmaps : isDirectedRelB S (engelerC (A := A)) (engelerQ (A := A)) <=
  mapsToSupB (engelerFun (A := A)) T
  (engelerAppGraph (A := A) z) (engelerQ (A := A)) :=
  (mapsToSupB_engelerFun (A := A) T z (engelerAppGraph (A := A) z)).trans' <|
  le_inf (le_inf hdirT (hsupT.trans inf_le_right)) hFun
have himg : isDirectedRelB S (engelerC (A := A)) (engelerQ (A := A)) <=
  isSupRelB (engelerAppGraph (A := A) z)
    (graphImageB (engelerFun (A := A)) T (engelerC (A := A)))
    (engelerQ (A := A)) :=
  (mapsToSupB_le_isSup_graphImageB
    (F := engelerFun (A := A)) (S := T)
    (D := engelerD (A := A)) (E := engelerC (A := A))
    (Q := engelerQ (A := A)) (y := engelerAppGraph (A := A) z)
    (le_of_eq (isFunctionB_engelerFun (A := A)).symm)).trans' <|
  le_inf le_top hmaps
have heq : isDirectedRelB S (engelerC (A := A)) (engelerQ (A := A)) <=
  eqB (graphImageB (engelerFun (A := A)) T (engelerC (A := A))) S :=
  (eqB_funImage_lamImage (A := A) S).trans'
  (isDirectedRelB_le_subsetB S (engelerC (A := A)) (engelerQ (A := A)))
exact (isSupRelB_congr_set (engelerAppGraph (A := A) z)
  (graphImageB (engelerFun (A := A)) T (engelerC (A := A)))
  S (engelerQ (A := A))).trans' <|
  le_inf heq himg

theorem eqB_appGraph_sUnion_lamImage [Nontrivial A]
  (S x : AName.{u} A) :
  isDirectedRelB S (engelerC (A := A)) (engelerQ (A := A)) sqcap
    isSupRelB x S (engelerQ (A := A)) <=
  eqB x
    (engelerAppGraph (A := A)
      (sUnionB
        (graphImageB (engelerLamB (A := A)) S
          (engelerD (A := A)))))) :=
  (eqB_of_isSupRelB_engelerQ (A := A) x
    (engelerAppGraph (A := A)

```

```

      (sUnionB
        (graphImageB (engelerLamB (A := A)) S
          (engelerD (A := A))))
    S).trans' <|
  le_inf inf_le_right
    ((isSupRelB_appGraph_sUnion_lamImage (A := A) S).trans' inf_le_left)

theorem isUpperBoundRelB_engelerLamB_image [Nontrivial A]
  (S x y : AName.{u} A) :
  isDirectedRelB S (engelerC (A := A)) (engelerQ (A := A)) sqcap
    isSupRelB x S (engelerQ (A := A)) sqcap
      memB (opairB x y) (engelerLamB (A := A)) <=
  isUpperBoundRelB y
    (graphImageB (engelerLamB (A := A)) S (engelerD (A := A)))
    (engelerR (A := A)) := by
  unfold isUpperBoundRelB
  refine le_iInf fun L => ?_
  rw [le_himp_iff, memB_graphImageB]
  let t :=
    isDirectedRelB S (engelerC (A := A)) (engelerQ (A := A)) sqcap
      isSupRelB x S (engelerQ (A := A)) sqcap
        memB (opairB x y) (engelerLamB (A := A)) sqcap
          (memB L (engelerD (A := A)) sqcap
            bigcup G : AName.{u} A,
              memB G S sqcap memB (opairB G L) (engelerLamB (A := A)))
  change t <= relB (engelerR (A := A)) L y
  have hsup : t <=
    bigcup G : AName.{u} A,
      memB G S sqcap memB (opairB G L) (engelerLamB (A := A)) :=
    inf_le_right.trans inf_le_right
  have ht : t = t sqcap
    bigcup G : AName.{u} A,
      memB G S sqcap memB (opairB G L) (engelerLamB (A := A)) :=
    (inf_eq_left.mpr hsup).symm
  rw [ht, inf_iSup_eq]
  refine iSup_le fun G => ?_
  exact (engelerLamB_mapsToSup_upper (A := A) S x y G L).trans' <|
    le_inf (le_inf (le_inf (le_inf
      (inf_le_left.trans (inf_le_left.trans (inf_le_left.trans inf_le_left)))
      (inf_le_left.trans (inf_le_left.trans (inf_le_left.trans inf_le_right)))
      (inf_le_left.trans (inf_le_left.trans inf_le_right)))
      (inf_le_right.trans inf_le_left))
      (inf_le_right.trans inf_le_right))

theorem subsetB_sUnion_lamImage_le_lam [Nontrivial A]
  (S x y : AName.{u} A) :
  isDirectedRelB S (engelerC (A := A)) (engelerQ (A := A)) sqcap
    isSupRelB x S (engelerQ (A := A)) sqcap
      memB (opairB x y) (engelerLamB (A := A)) <=
  subsetB
    (sUnionB
      (graphImageB (engelerLamB (A := A)) S (engelerD (A := A))))
  y :=
  (subsetB_sUnionB_of_upperBound
    (graphImageB (engelerLamB (A := A)) S (engelerD (A := A))) y).trans' <|
  (isUpperBoundRelB_le_isUpperBoundSubsetB y
    (graphImageB (engelerLamB (A := A)) S (engelerD (A := A)))
    (engelerD (A := A))).trans' <|
  isUpperBoundRelB_engelerLamB_image (A := A) S x y

theorem memB_pairApplyB_lamGraph_mono [Nontrivial A]
  (G : AName.{u} A) {J K : Finset Nat} (hJK : J subseteq K) (n : Nat) :
  memB G (engelerC (A := A)) sqcap

```



```

    memB (pairApplyB (A := A) J n) (engelerLamGraphName G) <=
    memB (pairApplyB (A := A) K n) (engelerLamGraphName G) := by
rw [memB_pairApplyB_engelerLamGraphName, memB_pairApplyB_engelerLamGraphName]
rw [inf_iSup_eq]
refine iSup_le fun Y => ?_
have htot :
  memB G (engelerC (A := A)) sqcap
  (memB (opairB (check (A := A) (finsetPSet J)) Y) G sqcap
    memB (check (PSet.ofNat n)) Y) <=
  bigcup Z, memB (opairB (check (A := A) (finsetPSet K)) Z) G :=
(isTotalB_apply G (engelerD (A := A))
  (check (A := A) (finsetPSet K))).trans' <|
  le_inf ((memB_engelerC_le_isTotal (A := A) G).trans' inf_le_left)
  (le_top.trans (memB_check_finsetPSet_engelerD (A := A) K).ge)
have ht : memB G (engelerC (A := A)) sqcap
  (memB (opairB (check (A := A) (finsetPSet J)) Y) G sqcap
    memB (check (PSet.ofNat n)) Y) =
  (memB G (engelerC (A := A)) sqcap
    (memB (opairB (check (A := A) (finsetPSet J)) Y) G sqcap
      memB (check (PSet.ofNat n)) Y)) sqcap
  bigcup Z, memB (opairB (check (A := A) (finsetPSet K)) Z) G :=
  (inf_eq_left.mpr htot).symm
rw [ht, inf_iSup_eq]
refine iSup_le fun Z => le_iSup_of_le Z ?_
let r :=
  (memB G (engelerC (A := A)) sqcap
    (memB (opairB (check (A := A) (finsetPSet J)) Y) G sqcap
      memB (check (PSet.ofNat n)) Y)) sqcap
  memB (opairB (check (A := A) (finsetPSet K)) Z) G
change r <=
  memB (opairB (check (A := A) (finsetPSet K)) Z) G sqcap
  memB (check (PSet.ofNat n)) Z
have hZG : r <=
  memB (opairB (check (A := A) (finsetPSet K)) Z) G :=
  inf_le_right
have hYG : r <=
  memB (opairB (check (A := A) (finsetPSet J)) Y) G :=
  inf_le_left.trans (inf_le_right.trans inf_le_left)
have hnY : r <= memB (check (PSet.ofNat n)) Y :=
  inf_le_left.trans (inf_le_right.trans inf_le_right)
have hGC : r <= memB G (engelerC (A := A)) :=
  inf_le_left.trans inf_le_left
have hrelJK : r <=
  relB (engelerR (A := A))
  (check (A := A) (finsetPSet J))
  (check (A := A) (finsetPSet K)) := by
rw [relB_engelerR]
exact le_inf (le_inf
  (le_top.trans (memB_check_finsetPSet_engelerD (A := A) J).ge)
  (le_top.trans (memB_check_finsetPSet_engelerD (A := A) K).ge))
  (le_top.trans (subsetB_finsetPSet_subset hJK).ge)
have hrelYZ : r <= relB (engelerR (A := A)) Y Z :=
  (scottContinuous_apply_mono
    (memB_engelerC_le_isScottContinuous (A := A) G)
    (check (A := A) (finsetPSet J))
    (check (A := A) (finsetPSet K)) Y Z).trans' <|
  le_inf (le_inf (le_inf hGC hYG) hZG) hrelJK
have hsubYZ : r <= subsetB Y Z := by
  have h := hrelYZ
  rw [relB_engelerR] at h
  exact h.trans inf_le_right
exact le_inf hZG
  ((memB_of_subsetB (check (PSet.ofNat n)) Y Z).trans' (le_inf hnY hsubYZ))

```

```

theorem memB_pairApplyB_lamGraph_of_subsetB [Nontrivial A]
  (G : AName.{u} A) (J K : Finset Nat) (n : Nat) :
  memB G (engelerC (A := A)) sqcap
    subsetB (check (A := A) (finsetPSet J))
      (check (A := A) (finsetPSet K)) sqcap
    memB (pairApplyB (A := A) J n) (engelerLamGraphName G) <=
    memB (pairApplyB (A := A) K n) (engelerLamGraphName G) := by
  rw [memB_pairApplyB_engelerLamGraphName (A := A) G J n,
    memB_pairApplyB_engelerLamGraphName (A := A) G K n]
  rw [inf_iSup_eq (a := A)]
  refine iSup_le fun Y => ?_
  have htot :
    memB G (engelerC (A := A)) sqcap
      subsetB (check (A := A) (finsetPSet J))
        (check (A := A) (finsetPSet K)) sqcap

```

Lean 4 source (lines 4001–4400)

```

    (memB (opairB (check (A := A) (finsetPSet J)) Y) G sqcap
      memB (check (PSet.ofNat n)) Y) <=
    bigcup Z, memB (opairB (check (A := A) (finsetPSet K)) Z) G :=
(isTotalB_apply G (engelerD (A := A))
  (check (A := A) (finsetPSet K))).trans' <|
  le_inf
    ((memB_engelerC_le_isTotal (A := A) G).trans'
      (inf_le_left.trans inf_le_left))
    (le_top.trans (memB_check_finsetPSet_engelerD (A := A) K).ge)
  have ht : memB G (engelerC (A := A)) sqcap
    subsetB (check (A := A) (finsetPSet J))
      (check (A := A) (finsetPSet K)) sqcap
    (memB (opairB (check (A := A) (finsetPSet J)) Y) G sqcap
      memB (check (PSet.ofNat n)) Y) =
    (memB G (engelerC (A := A)) sqcap
      subsetB (check (A := A) (finsetPSet J))
        (check (A := A) (finsetPSet K)) sqcap
      (memB (opairB (check (A := A) (finsetPSet J)) Y) G sqcap
        memB (check (PSet.ofNat n)) Y)) sqcap
    bigcup Z, memB (opairB (check (A := A) (finsetPSet K)) Z) G :=
    (inf_eq_left.mpr htot).symm
  rw [ht, inf_iSup_eq]
  refine iSup_le fun Z => le_iSup_of_le Z ?_
  let r :=
    (memB G (engelerC (A := A)) sqcap
      subsetB (check (A := A) (finsetPSet J))
        (check (A := A) (finsetPSet K)) sqcap
      (memB (opairB (check (A := A) (finsetPSet J)) Y) G sqcap
        memB (check (PSet.ofNat n)) Y)) sqcap
    memB (opairB (check (A := A) (finsetPSet K)) Z) G
  change r <=
    memB (opairB (check (A := A) (finsetPSet K)) Z) G sqcap
    memB (check (PSet.ofNat n)) Z
  have hZG : r <=
    memB (opairB (check (A := A) (finsetPSet K)) Z) G :=
    inf_le_right
  have hYG : r <=
    memB (opairB (check (A := A) (finsetPSet J)) Y) G :=
    inf_le_left.trans (inf_le_right.trans inf_le_left)
  have hnY : r <= memB (check (PSet.ofNat n)) Y :=
    inf_le_left.trans (inf_le_right.trans inf_le_right)
  have hGC : r <= memB G (engelerC (A := A)) :=
    inf_le_left.trans (inf_le_left.trans inf_le_left)
  have hsubJK : r <=
    subsetB (check (A := A) (finsetPSet J))

```

```

      (check (A := A) (finsetPSet K)) :=
    inf_le_left.trans (inf_le_left.trans inf_le_right)
have hrelJK : r <=
  relB (engelerR (A := A))
    (check (A := A) (finsetPSet J))
    (check (A := A) (finsetPSet K)) := by
  rw [relB_engelerR]
  exact le_inf (le_inf
    (le_top.trans (memB_check_finsetPSet_engelerD (A := A) J).ge)
    (le_top.trans (memB_check_finsetPSet_engelerD (A := A) K).ge))
  hsubJK
have hrelYZ : r <= relB (engelerR (A := A)) Y Z :=
  (scottContinuous_apply_mono
    (memB_engelerC_le_isScottContinuous (A := A) G)
    (check (A := A) (finsetPSet J))
    (check (A := A) (finsetPSet K)) Y Z).trans' <|
  le_inf (le_inf (le_inf hGC hYG) hZG) hrelJK
have hsubYZ : r <= subsetB Y Z := by
  have h := hrelYZ
  rw [relB_engelerR] at h
  exact h.trans inf_le_right
exact le_inf hZG
  ((memB_of_subsetB (check (PSet.ofNat n)) Y Z).trans' (le_inf hnY hsubYZ))

theorem memB_pairApplyB_sUnion_lamImage_of_subsetB [Nontrivial A]
  (S : AName.{u} A) (J K : Finset Nat) (n : Nat) :
  subsetB S (engelerC (A := A)) sqcap
    subsetB (check (A := A) (finsetPSet J))
      (check (A := A) (finsetPSet K)) sqcap
    memB (pairApplyB (A := A) J n)
      (sUnionB
        (graphImageB (engelerLamB (A := A)) S
          (engelerD (A := A)))) <=
  memB (pairApplyB (A := A) K n)
    (sUnionB
      (graphImageB (engelerLamB (A := A)) S
        (engelerD (A := A)))) := by
have hzJ : subsetB S (engelerC (A := A)) sqcap
  subsetB (check (A := A) (finsetPSet J))
    (check (A := A) (finsetPSet K)) sqcap
  memB (pairApplyB (A := A) J n)
    (sUnionB
      (graphImageB (engelerLamB (A := A)) S
        (engelerD (A := A)))) <=
  existsMemB (pairApplyB (A := A) J n)
    (graphImageB (engelerLamB (A := A)) S (engelerD (A := A))) := by
  rw [← memB_sUnionB]
  exact inf_le_right
refine (le_of_eq (memB_sUnionB (pairApplyB (A := A) K n)
  (graphImageB (engelerLamB (A := A)) S (engelerD (A := A)))) .symm).trans' ?_
unfold existsMemB at hzJ |-
have hzJ' : subsetB S (engelerC (A := A)) sqcap
  subsetB (check (A := A) (finsetPSet J))
    (check (A := A) (finsetPSet K)) sqcap
  memB (pairApplyB (A := A) J n)
    (sUnionB
      (graphImageB (engelerLamB (A := A)) S
        (engelerD (A := A)))) =
  (subsetB S (engelerC (A := A)) sqcap
    subsetB (check (A := A) (finsetPSet J))
      (check (A := A) (finsetPSet K)) sqcap
    memB (pairApplyB (A := A) J n)
      (sUnionB
        (graphImageB (engelerLamB (A := A)) S
          (engelerD (A := A))))

```

```

      (graphImageB (engelerLamB (A := A)) S
        (engelerD (A := A)))) sqcap
    bigcup L : AName.{u} A,
    memB L (graphImageB (engelerLamB (A := A)) S
      (engelerD (A := A))) sqcap
    memB (pairApplyB (A := A) J n) L :=
      (inf_eq_left.mpr hzJ).symm
  rw [hzJ', inf_iSup_eq]
  refine iSup_le fun L => le_iSup_of_le L ?_
  let t :=
    (subsetB S (engelerC (A := A)) sqcap
      subsetB (check (A := A) (finsetPSet J))
        (check (A := A) (finsetPSet K)) sqcap
      memB (pairApplyB (A := A) J n)
        (sUnionB
          (graphImageB (engelerLamB (A := A)) S
            (engelerD (A := A)))) sqcap
      (memB L (graphImageB (engelerLamB (A := A)) S
        (engelerD (A := A))) sqcap
        memB (pairApplyB (A := A) J n) L)
  change t <=
    memB L (graphImageB (engelerLamB (A := A)) S (engelerD (A := A))) sqcap
    memB (pairApplyB (A := A) K n) L
  have hLT : t <=
    memB L (graphImageB (engelerLamB (A := A)) S (engelerD (A := A))) :=
    inf_le_right.trans inf_le_left
  have hsup : t <=
    bigcup G : AName.{u} A,
    memB G S sqcap memB (opairB G L) (engelerLamB (A := A)) :=
    hLT.trans ((le_of_eq (memB_graphImageB (engelerLamB (A := A)) S
      (engelerD (A := A)) L)).trans inf_le_right)
  have ht : t = t sqcap
    bigcup G : AName.{u} A,
    memB G S sqcap memB (opairB G L) (engelerLamB (A := A)) :=
    (inf_eq_left.mpr hsup).symm
  rw [ht, inf_iSup_eq]
  refine iSup_le fun G => ?_
  let s :=
    t sqcap (memB G S sqcap memB (opairB G L) (engelerLamB (A := A)))
  change s <=
    memB L (graphImageB (engelerLamB (A := A)) S (engelerD (A := A))) sqcap
    memB (pairApplyB (A := A) K n) L
  have hsT : s <= t := inf_le_left
  have hLam : s <= memB (opairB G L) (engelerLamB (A := A)) :=
    inf_le_right.trans inf_le_right
  have hLeq : s <= eqB L (engelerLamGraphName G) :=
    ((engelerLamB_mem_le_eqB (A := A) G L).trans' hLam).trans inf_le_right
  have hGC : s <= memB G (engelerC (A := A)) :=
    ((engelerLamB_mem_le_eqB (A := A) G L).trans' hLam).trans
    (inf_le_left.trans inf_le_left)
  have hJn : s <= memB (pairApplyB (A := A) J n) L :=
    hsT.trans (inf_le_right.trans inf_le_right)
  have hJlam : s <=
    memB (pairApplyB (A := A) J n) (engelerLamGraphName G) :=
    (memB_eqB_right L (pairApplyB (A := A) J n)
      (engelerLamGraphName G)).trans' (le_inf hJn hLeq)
  have hsubJK : s <=
    subsetB (check (A := A) (finsetPSet J))
      (check (A := A) (finsetPSet K)) :=
    hsT.trans (inf_le_left.trans (inf_le_left.trans inf_le_right))
  have hKlam : s <=
    memB (pairApplyB (A := A) K n) (engelerLamGraphName G) :=
    (memB_pairApplyB_lamGraph_of_subsetB (A := A) G J K n).trans' <|

```

```

    le_inf (le_inf hGC hsubJK) hJlam
have hKn : s <= memB (pairApplyB (A := A) K n) L :=
  (memB_eqB_right (engelerLamGraphName G) (pairApplyB (A := A) K n) L).trans' <|
  le_inf hKlam (by rw [eqB_comm]; exact hLeq)
exact le_inf (hsT.trans hLT) hKn

theorem memB_pairApplyB_of_mem_appName_sUnion [Nontrivial A]
  (S : AName.{u} A) (K : Finset Nat) (n : Nat) :
  subsetB S (engelerC (A := A)) sqcap
  memB (check (PSet.ofNat n))
  (engelerAppName
    (sUnionB
      (graphImageB (engelerLamB (A := A)) S
        (engelerD (A := A))))
    (check (A := A) (finsetPSet K))) <=
  memB (pairApplyB (A := A) K n)
  (sUnionB
    (graphImageB (engelerLamB (A := A)) S
      (engelerD (A := A)))) := by
  rw [memB_engelerAppName, memB_check_ofNat_omega, top_inf_eq]
  unfold engelerAppPred
  rw [inf_iSup_eq]
  refine iSup_le fun J => ?_
  rw [inf_iSup_eq]
  refine iSup_le fun m => ?_
  cases eq_or_ne n m with
  | inl hnm =>
    subst hnm
    rw [eqB_self (A := A) (check (PSet.ofNat n)), top_inf_eq]
    exact (memB_pairApplyB_sUnion_lamImage_of_subsetB (A := A) S J K n).trans' <|
      le_inf (le_inf inf_le_left (inf_le_right.trans inf_le_left))
        (inf_le_right.trans inf_le_right)
  | inr hne =>
    exact (bot_le (a := A)).trans' <|
      (le_of_eq (eqB_check_ofNat_bot (A := A) hne)).trans'
        (inf_le_right.trans (inf_le_left.trans inf_le_left))

theorem subsetB_lam_le_sUnion_lamImage [Nontrivial A]
  (S x y : AName.{u} A) :
  isDirectedRelB S (engelerC (A := A)) (engelerQ (A := A)) sqcap
  isSupRelB x S (engelerQ (A := A)) sqcap
  memB (opairB x y) (engelerLamB (A := A)) <=
  subsetB y
  (sUnionB
    (graphImageB (engelerLamB (A := A)) S (engelerD (A := A)))) := by
  rw [subsetB_eq_iInf y
    (sUnionB
      (graphImageB (engelerLamB (A := A)) S (engelerD (A := A))))]
  refine le_iInf fun q => ?_
  rw [le_himp_iff]
  let t :=
    isDirectedRelB S (engelerC (A := A)) (engelerQ (A := A)) sqcap
    isSupRelB x S (engelerQ (A := A)) sqcap
    memB (opairB x y) (engelerLamB (A := A)) sqcap memB q y
  change t <=
  memB q
  (sUnionB
    (graphImageB (engelerLamB (A := A)) S (engelerD (A := A))))
  have hyeq : t <= eqB y (engelerLamGraphName x) :=
    ((engelerLamB_mem_le_eqB (A := A) x y).trans'
      (inf_le_left.trans inf_le_right)).trans inf_le_right
  have hqlam : t <= memB q (engelerLamGraphName x) :=
    (memB_eqB_right y q (engelerLamGraphName x)).trans' <|

```

```

    le_inf inf_le_right hyeq
have hpred : t <= engelerLamGraphPred x q :=
  hqlam.trans (le_of_eq (memB_engelerLamGraphName x q) |>.trans inf_le_right)
have ht : t = t sqcap engelerLamGraphPred x q :=
  (inf_eq_left.mpr hpred).symm
rw [ht]
unfold engelerLamGraphPred
rw [inf_iSup_eq]
refine iSup_le fun K => ?_
rw [inf_iSup_eq]
refine iSup_le fun n => ?_
rw [inf_iSup_eq]
refine iSup_le fun Y => ?_
let s :=
  t sqcap (eqB q (pairApplyB (A := A) K n) sqcap
    memB (opairB (check (A := A) (finsetPSet K)) Y) x sqcap
    memB (check (PSet.ofNat n)) Y)
change s <=
  memB q
  (sUnionB
    (graphImageB (engelerLamB (A := A)) S (engelerD (A := A))))
have hsT : s <= t := inf_le_left
have hxeq : s <=
  eqB x
  (engelerAppGraph (A := A)
    (sUnionB
      (graphImageB (engelerLamB (A := A)) S
        (engelerD (A := A)))))) :=
  (eqB_appGraph_sUnion_lamImage (A := A) S x).trans' <|
  le_inf (hsT.trans (inf_le_left.trans (inf_le_left.trans inf_le_left)))
  (hsT.trans (inf_le_left.trans (inf_le_left.trans inf_le_right)))
have hxy : s <=
  memB (opairB (check (A := A) (finsetPSet K)) Y) x :=
  inf_le_right.trans (inf_le_left.trans inf_le_right)
have happ : s <=
  memB (opairB (check (A := A) (finsetPSet K)) Y)
  (engelerAppGraph (A := A)
    (sUnionB
      (graphImageB (engelerLamB (A := A)) S
        (engelerD (A := A)))))) :=
  (memB_opairB_eqB_left x
    (engelerAppGraph (A := A)
      (sUnionB
        (graphImageB (engelerLamB (A := A)) S
          (engelerD (A := A))))))
    (check (A := A) (finsetPSet K)) Y).trans' <|
  le_inf hxeq hxy
have hYeq : s <=
  eqB Y
  (engelerAppName
    (sUnionB
      (graphImageB (engelerLamB (A := A)) S
        (engelerD (A := A))))
    (check (A := A) (finsetPSet K))) :=
  ((engelerAppGraph_mem_le_eqB (A := A)
    (sUnionB
      (graphImageB (engelerLamB (A := A)) S
        (engelerD (A := A))))
    (check (A := A) (finsetPSet K)) Y).trans' happ).trans inf_le_right
have hnY : s <= memB (check (PSet.ofNat n)) Y :=
  inf_le_right.trans inf_le_right
have hnapp : s <=
  memB (check (PSet.ofNat n))

```

```

    (engelerAppName
      (sUnionB
        (graphImageB (engelerLamB (A := A)) S
          (engelerD (A := A))))
      (check (A := A) (finsetPSet K))) :=
(memB_eqB_right Y (check (PSet.ofNat n))
  (engelerAppName
    (sUnionB
      (graphImageB (engelerLamB (A := A)) S
        (engelerD (A := A))))
      (check (A := A) (finsetPSet K))))).trans' <|
le_inf hnY hYeq
have hSC : s <= subsetB S (engelerC (A := A)) :=
  (isDirectedRelB_le_subsetB S (engelerC (A := A))
    (engelerQ (A := A))).trans' <|
  hsT.trans (inf_le_left.trans (inf_le_left.trans inf_le_left))
have hpair : s <=
  memB (pairApplyB (A := A) K n)
  (sUnionB
    (graphImageB (engelerLamB (A := A)) S
      (engelerD (A := A)))) :=
  (memB_pairApplyB_of_mem_appName_sUnion (A := A) S K n).trans' <|
  le_inf hSC hnapp
have hq : s <= eqB q (pairApplyB (A := A) K n) :=
  inf_le_right.trans (inf_le_left.trans inf_le_left)
exact (memB_eqB_left (pairApplyB (A := A) K n)
  (sUnionB
    (graphImageB (engelerLamB (A := A)) S (engelerD (A := A))))
  q).trans' <|
le_inf hpair (by rw [eqB_comm]; exact hq)

theorem eqB_lam_sUnion_lamImage [Nontrivial A]
  (S x y : AName.{u} A) :
  isDirectedRelB S (engelerC (A := A)) (engelerQ (A := A)) sqcap
  isSupRelB x S (engelerQ (A := A)) sqcap
  memB (opairB x y) (engelerLamB (A := A)) <=
  eqB y
  (sUnionB
    (graphImageB (engelerLamB (A := A)) S
      (engelerD (A := A)))) := by
  rw [eqB_eq_subset]
  exact le_inf
    (subsetB_lam_le_sUnion_lamImage (A := A) S x y)
    (subsetB_sUnion_lamImage_le_lam (A := A) S x y)

theorem mapsToSupB_engelerLamB [Nontrivial A]
  (S x y : AName.{u} A) :
  isDirectedRelB S (engelerC (A := A)) (engelerQ (A := A)) sqcap
  isSupRelB x S (engelerQ (A := A)) sqcap
  memB (opairB x y) (engelerLamB (A := A)) <=
  mapsToSupB (engelerLamB (A := A)) S y (engelerR (A := A)) := by
  unfold mapsToSupB
  refine le_inf ?up ?least
  * refine le_iInf fun G => le_iInf fun L => ?_
    rw [le_himp_iff]
    exact (engelerLamB_mapsToSup_upper (A := A) S x y G L).trans' <|
      le_inf (le_inf inf_le_left (inf_le_right.trans inf_le_left))
        (inf_le_right.trans inf_le_right)
  * refine le_iInf fun u => ?_
    rw [le_himp_iff]
    let T := graphImageB (engelerLamB (A := A)) S (engelerD (A := A))
    let z := sUnionB T
    let t :=

```

```

isDirectedRelB S (engelerC (A := A)) (engelerQ (A := A)) sqcap
isSupRelB x S (engelerQ (A := A)) sqcap
memB (opairB x y) (engelerLamB (A := A)) sqcap
(? G : AName.{u} A, ? L : AName.{u} A,
  memB G S sqcap memB (opairB G L) (engelerLamB (A := A)) ?
  relB (engelerR (A := A)) L u)
change t <= relB (engelerR (A := A)) y u
have heq : t <= eqB y z :=
  (eqB_lam_sUnion_lamImage (A := A) S x y).trans' <|
  inf_le_left
have hupT : t <= isUpperBoundRelB u T (engelerR (A := A)) := by
  unfold isUpperBoundRelB
  refine le_iInf fun L => ?_
  rw [le_himp_iff, memB_graphImageB]
  let s :=
    t sqcap (memB L (engelerD (A := A)) sqcap
      bigcup G : AName.{u} A,
      memB G S sqcap memB (opairB G L) (engelerLamB (A := A)))
  change s <= relB (engelerR (A := A)) L u
  have hsup : s <=
    bigcup G : AName.{u} A,
    memB G S sqcap memB (opairB G L) (engelerLamB (A := A)) :=
    inf_le_right.trans inf_le_right
  have hs : s = s sqcap
    bigcup G : AName.{u} A,
    memB G S sqcap memB (opairB G L) (engelerLamB (A := A)) :=
    (inf_eq_left.mpr hsup).symm
  rw [hs, inf_iSup_eq]
  refine iSup_le fun G => ?_
  have hg := iInf_le
    (fun G' : AName.{u} A =>
      ? L' : AName.{u} A,
      memB G' S sqcap memB (opairB G' L') (engelerLamB (A := A)) ?
      relB (engelerR (A := A)) L' u) G
  have hL := (iInf_le
    (fun L' : AName.{u} A =>
      memB G S sqcap memB (opairB G L') (engelerLamB (A := A)) ?
      relB (engelerR (A := A)) L' u) L).trans' hg
  exact (le_himp_iff.mp hL).trans' <|
  le_inf (inf_le_left.trans (inf_le_left.trans inf_le_right))

```

Lean 4 source (lines 4401–4452)

```

inf_le_right
have hsupz : t <= isSupRelB z T (engelerR (A := A)) :=
  ((isSupRelB_sUnion_engelerLamB_image (A := A) S).trans'
    (inf_le_left.trans (inf_le_left.trans inf_le_left))).trans inf_le_right
have hzu : t <= relB (engelerR (A := A)) z u :=
  (isSupRelB_least z T (engelerR (A := A)) u).trans' <|
  le_inf hsupz hupT
exact (relB_congr (engelerR (A := A)) z y u u).trans' <|
  le_inf (le_inf (by rw [eqB_comm]; exact heq)
    (le_top.trans (eqB_self _).ge)) hzu

theorem isScottContinuousB_engelerLamB [Nontrivial A] :
  isScottContinuousB (engelerLamB (A := A))
    (engelerC (A := A)) (engelerD (A := A))
    (engelerQ (A := A)) (engelerR (A := A)) = top := by
  unfold isScottContinuousB
  refine inf_eq_top_iff.mpr <inf_eq_top_iff.mpr <?hfun, ?hmono>, ?hsup>
  * exact isFunctionB_engelerLamB (A := A)
  * refine iInf_eq_top.mpr fun G => iInf_eq_top.mpr fun G' =>
    iInf_eq_top.mpr fun L => iInf_eq_top.mpr fun L' =>
      himp_eq_top_iff.mpr (engelerLamB_mono (A := A) G G' L L')

```



```

* refine iInf_eq_top.mpr fun S => iInf_eq_top.mpr fun x =>
  iInf_eq_top.mpr fun y => himp_eq_top_iff.mpr ?_
exact mapsToSupB_engelerLamB (A := A) S x y

theorem theorem_30_va [Nontrivial A] :
  isReflexiveDcpoB (engelerD (A := A)) (engelerR (A := A))
    (engelerC (A := A)) (engelerQ (A := A))
    (engelerFun (A := A)) (engelerLamB (A := A)) = top := by
  unfold isReflexiveDcpoB
  refine iInf_eq_top_iff.mpr <iInf_eq_top_iff.mpr <iInf_eq_top_iff.mpr
    <iInf_eq_top_iff.mpr <iInf_eq_top_iff.mpr
      <engelerR_isDcpoWithBottomB, isContinuousMapSpaceB_engelerC>,
      isPointwiseOrderB_engelerQ>,
      isScottContinuousB_engelerFun (A := A)>,
      isScottContinuousB_engelerLamB (A := A)>,
      eqB_comp_engelerFun_engelerLamB (A := A)>

noncomputable def theorem_30_internalModel [Nontrivial A] :
  InternalReflexiveModel (A := A) where
  D := engelerD
  R := engelerR
  C := engelerC
  Q := engelerQ
  Fun := engelerFun
  Lam := engelerLamB
  valid := theorem_30_va
  strict := oid_engelerD_isStrict
  total := oid_engelerD_isTotal
  complete := oid_engelerD_isComplete

end Scott2026

```

A.33 Scott2026/Lemma31.lean

429 lines.

Lean 4 source (lines 1–400)

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/

import Scott2026.InterpVA

/-!
# Lemma 31: check commutation of the Engeler interpretation

Furber-Mardare-Panangaden-Scott, CSL 2026, Lemma 31. For a pure term
`M in `(Var)` and a valuation `?` with `fv(M) subseq dom(?)`,

`??check M?^A_{check ?} = ?M?_?? = 1`

on `P^A(check E)` versus `P(E)`. The closed case follows from
`{ } = check { }`.

Ground interpretation uses the same pairing as the VA model:
`engelerReflexiveDcpo engelerPair engelerPair_injective`. The VA side
is `interpVA` / `interpClosedVA` on `EngelerCarrier`.
-/

universe u

```

```

namespace Scott2026

open AName
open Classical

variable {A : Type u} [CompleteBooleanAlgebra A]

noncomputable section

/-- Ground Engeler dcpo with the Theorem 30 pairing. -/
abbrev engelerDcpo : ReflexiveDcpo (Set Nat) :=
  engelerReflexiveDcpo engelerPair engelerPair_injective

/-!
## Check of ground sets
-/

/-- Arbitrary subset of `?` indexed by its elements (mirrors `finsetPSet`). -/
def setPSet (S : Set Nat) : PSet.{u} :=
  PSet.mk (ULift.{u} {n : Nat // n in S}) (fun n => PSet.ofNat n.down.val)

theorem ofNat_mem_setPSet {S : Set Nat} {n : Nat} :
  PSet.ofNat.{u} n in setPSet S <-> n in S := by
  constructor
  * intro hmem
    obtain <<m, hm>, hmn> := hmem
    change PSet.Equiv (PSet.ofNat.{u} n) (PSet.ofNat.{u} m) at hmn
    exact ofNat_equiv_iff.mp hmn |> hm
  * intro hn
    exact <<n, hn>, PSet.Equiv.rfl>

/-- Children of `setPSet` are von Neumann numerals, so inequivalent
ground sets of `Nat` remain inequivalent as pre-sets. -/
theorem setPSet_equiv_iff {S T : Set Nat} :
  PSet.Equiv.{u, u} (setPSet S) (setPSet T) <-> S = T := by
  constructor
  * intro h
    ext n
    constructor
    * intro hn
      exact ofNat_mem_setPSet.mp
        ((PSet.Mem.congr_right (x := setPSet S) (y := setPSet T) h).mp
        (ofNat_mem_setPSet.mpr hn))
    * intro hn
      exact ofNat_mem_setPSet.mp
        ((PSet.Mem.congr_right (x := setPSet T) (y := setPSet S) h.symm).mp
        (ofNat_mem_setPSet.mpr hn))
  * rintro rfl
    exact PSet.Equiv.rfl (x := setPSet S)

theorem setPSet_not_equiv_of_ne {S T : Set Nat} (hne : S != T) :
  not PSet.Equiv.{u, u} (setPSet S) (setPSet T) :=
  mt setPSet_equiv_iff.mp hne

theorem subsetB_setPSet (S : Set Nat) (X : AName.{u} A) :
  subsetB (check (A := A) (setPSet S)) X =
  ? n : {n : Nat // n in S}, memB (check (PSet.ofNat n.1)) X := by
  rw [setPSet, check_mk, subsetB_mk]
  refine le_antisymm ?_ ?_
  * refine le_iInf fun n => ?_
    have := iInf_le (fun i : ULift.{u} {n : Nat // n in S} =>
      (top : A) ? memB (check (PSet.ofNat i.down.val)) X) <n>

```

```

    simpa [top_himp] using this
* refine le_iInf fun i => ?_
  rw [top_himp]
  exact iInf_le (fun n : {n : Nat // n in S} =>
    memB (check (PSet.ofNat n.1)) X) i.down

theorem subsetB_setPSet_omega (S : Set Nat) :
  subsetB (check (A := A) (setPSet S)) (check PSet.omega) = top := by
  rw [subsetB_setPSet]
  exact iInf_eq_top.mpr fun _ => memB_check_ofNat_omega _

theorem memB_check_ofNat_setPSet (S : Set Nat) (n : Nat) :
  memB (check (A := A) (PSet.ofNat n)) (check (setPSet S)) =
    if n in S then top else False := by
  rw [setPSet, check_mk, memB_mk]
  by_cases hn : n in S
* rw [if_pos hn]
  refine top_unique (le_iSup_of_le <<n, hn>> ?_)
  rw [eqB_self (A := A), top_inf_eq]
* rw [if_neg hn]
  refine le_antisymm ?_ bot_le
  refine iSup_le fun i => ?_
  rcases subsingleton_or_nontrivial A with hA | hA
* exact (Subsingleton.elim (a := A) _ _).le
* have : Nontrivial A := hA
  have hne : n != i.down.val := fun h => hn (h |> i.down.property)
  rw [eqB_check_ofNat_bot (A := A) hne, bot_inf_eq]

noncomputable def setToPowerIdx (S : Set Nat) :
  (powerB (check (A := A) PSet.omega)).idx :=
  restrictPowerIdx (check (setPSet S)) (check (A := A) PSet.omega)

/-- Check/embedding of a ground `Set Nat` into the Theorem 30 carrier. -/
noncomputable def setToCanonical (S : Set Nat) : EngelerCarrier (A := A) :=
  normalizePowerIdx (check (A := A) PSet.omega) (setToPowerIdx (A := A) S)

theorem eqB_setToCanonical (S : Set Nat) :
  eqB (child? (A := A) (setToCanonical (A := A) S))
    (check (setPSet S)) = top := by
  have hnrm : eqB
    ((powerB (check (A := A) PSet.omega)).child
      (setToCanonical (A := A) S).1)
    ((powerB (check (A := A) PSet.omega)).child
      (setToPowerIdx (A := A) S)) = top := by
  rw [eqB_comm]
  exact normalizePowerIdx_eqB (check (A := A) PSet.omega)
    (setToPowerIdx (A := A) S)
  have hrest : eqB
    ((powerB (check (A := A) PSet.omega)).child
      (setToPowerIdx (A := A) S))
    (check (setPSet S)) = top := by
  rw [setToPowerIdx, restrictPowerIdx_child, eqB_comm]
  exact eqB_restrictName_of_subsetB _ _ (subsetB_setPSet_omega S)
  exact eqB_top_trans (A := A) hnrm hrest

theorem memOfNat_setToCanonical (S : Set Nat) (n : Nat) :
  memOfNat (A := A) (setToCanonical (A := A) S) n =
    if n in S then top else False := by
  have h := eqB_setToCanonical (A := A) S
  unfold memOfNat
  rw [eqB_top_memB_right h, memB_check_ofNat_setPSet]

theorem setToCanonical_coe (K : Finset Nat) :

```

```

    setToCanonical (A := A) (K) = finsetToCanonical (A := A) K := by
have hmem : forall n : Nat,
  memB (check (PSet.ofNat n))
    ((powerB (check (A := A) PSet.omega)).child
      (setToCanonical (A := A) (K : Set Nat)).1) =
  memB (check (PSet.ofNat n))
    ((powerB (check (A := A) PSet.omega)).child
      (finsetToCanonical (A := A) K).1) := by
intro n
change memOfNat (A := A) (setToCanonical (A := A) (K : Set Nat)) n =
  memOfNat (A := A) (finsetToCanonical (A := A) K) n
rw [memOfNat_setToCanonical, memB_finsetToCanonical]
by_cases hn : n in K
* rw [if_pos (Finset.mem_coe.mpr hn), if_pos hn]
* rw [if_neg (mt Finset.mem_coe.mp hn), if_neg hn]
have heq : eqB (child? (A := A) (setToCanonical (A := A) (K : Set Nat)))
  (child? (finsetToCanonical (A := A) K)) = top :=
  eqB_canonical_of_memB_ofNat (A := A) hmem
refine (canonicalPowerSetoid_isStrict (check (A := A) PSet.omega))
  (setToCanonical (A := A) (K : Set Nat)) (finsetToCanonical (A := A) K) ?_
rw [canonicalPowerSetoid_eq, oid_eq_powerB]
exact heq

theorem setToCanonical_empty :
  setToCanonical (A := A) ({ } : Set Nat) = finsetToCanonical (A := A) { } := by
  simp using setToCanonical_coe (A := A) ({ } : Finset Nat)

/-!
## Finite-subset Boolean value against a checked ground set
-/

theorem subsetB_finsetPSet_setPSet (K : Finset Nat) (S : Set Nat) :
  subsetB (check (A := A) (finsetPSet K)) (check (setPSet S)) =
    ? k : {k // k in K}, if k.1 in S then (top : A) else False := by
  rw [subsetB_finsetPSet]
  refine iInf_congr fun k => memB_check_ofNat_setPSet (A := A) S k.1

theorem subsetB_finsetPSet_setPSet_eq (K : Finset Nat) (S : Set Nat) :
  subsetB (check (A := A) (finsetPSet K)) (check (setPSet S)) =
    if (K : Set Nat) subseq S then top else False := by
  rw [subsetB_finsetPSet_setPSet]
  rcases subsingleton_or_nontrivial A with hA | hA
  * exact Subsingleton.elim _ _
  * clear hA
  by_cases hKS : (K : Set Nat) subseq S
  * rw [if_pos hKS]
    refine iInf_eq_top.mpr fun k => ?_
    have hk : k.1 in S := hKS (Finset.mem_coe.mpr k.2)
    rw [if_pos hk]
  * rw [if_neg hKS]
    obtain <k, hkK, hkS> := Set.not_subset.mp hKS
    have hkK' : k in K := Finset.mem_coe.mp hkK
    refine le_antisymm ?_ bot_le
    have hle := iInf_le (fun k : {k // k in K} =>
      if k.1 in S then (top : A) else False) <k, hkK'>
    rw [if_neg hkS] at hle
    exact hle

theorem eqB_ofNat_pairApplyB (n : Nat) (K : Finset Nat) (m : Nat) :
  eqB (A := A) (check (PSet.ofNat n)) (pairApplyB K m) =
    if n = engelerPair (K, m) then top else False := by
  rcases subsingleton_or_nontrivial A with hA | hA
  * exact Subsingleton.elim _ _

```

```

* have : Nontrivial A := hA
by_cases h : n = engelerPair (K, m)
* rw [if_pos h, h, pairApplyB, eqB_self (A := A)]
* rw [if_neg h, pairApplyB, eqB_check_ofNat_bot (A := A) h]

theorem iSup_indicator_engelerApp (S_M S_N : Set Nat) (n : Nat) :
  ( bigcup K : Finset Nat,
    (if (K : Set Nat) subseq S_N then ( top : A) else False) sqcap
    (if engelerPair (K, n) in S_M then top else False)) =
    if n in engelerApp engelerPair S_M S_N then top else False := by
rcases subsingleton_or_nontrivial A with hA | hA
* exact Subsingleton.elim _ _
* have : Nontrivial A := hA
by_cases hn : n in engelerApp engelerPair S_M S_N
* rw [if_pos hn]
  rw [engelerApp, Set.mem_setOf_eq] at hn
  obtain <K, hK, hp> := hn
  refine top_unique (le_iSup_of_le K ?_)
  rw [if_pos hK, if_pos hp, top_inf_eq]
* rw [if_neg hn]
  refine le_antisymm ?_ bot_le
  refine iSup_le fun K => ?_
  by_cases hK : (K : Set Nat) subseq S_N
  * by_cases hp : engelerPair (K, n) in S_M
    * have : n in engelerApp engelerPair S_M S_N := by
      rw [engelerApp, Set.mem_setOf_eq]
      exact <K, hK, hp>
      exact (hn this).elim
    * rw [if_pos hK, if_neg hp, inf_bot_eq]
  * rw [if_neg hK, bot_inf_eq]

theorem iSup_indicator_engelerLam (f : Set Nat -> Set Nat) (n : Nat) :
  ( bigcup K : Finset Nat, bigcup m : Nat,
    (if n = engelerPair (K, m) then ( top : A) else False) sqcap
    (if m in f (K) then top else False)) =
    if n in engelerLam engelerPair f then top else False := by
rcases subsingleton_or_nontrivial A with hA | hA
* exact Subsingleton.elim _ _
* have : Nontrivial A := hA
by_cases hn : n in engelerLam engelerPair f
* rw [if_pos hn]
  rw [engelerLam, Set.mem_setOf_eq] at hn
  obtain <K, m, hm, heq> := hn
  refine top_unique (le_iSup_of_le K (le_iSup_of_le m ?_))
  rw [if_pos heq, if_pos hm, top_inf_eq]
* rw [if_neg hn]
  refine le_antisymm ?_ bot_le
  refine iSup_le fun K => iSup_le fun m => ?_
  by_cases heq : n = engelerPair (K, m)
  * by_cases hm : m in f (K)
    * have : n in engelerLam engelerPair f := by
      rw [engelerLam, Set.mem_setOf_eq]
      exact <K, m, hm, heq>
      exact (hn this).elim
    * rw [if_pos heq, if_neg hm, inf_bot_eq]
  * rw [if_neg heq, bot_inf_eq]

/-!
## Check of a valuation
-/

variable {Var : Type*} [DecidableEq Var]

```

```

/-- Check of a ground valuation: same domain, each value embedded by
`setToCanonical`. -/
def checkVal (? : Valuation Var (Set Nat)) :
  Valuation Var (EngelerCarrier (A := A)) where
  domain := ?.domain
  toFun := fun x => setToCanonical (?.toFun x)

theorem checkVal_update (? : Valuation Var (Set Nat)) (x : Var) (d : Set Nat) :
  checkVal (A := A) (?.update x d) =
    (checkVal (A := A) ?).update x (setToCanonical (A := A) d) := by
  refine Valuation.ext rfl ?_
  funext y
  change setToCanonical (A := A) ((?.update x d).toFun y) =
    ((checkVal (A := A) ?).update x (setToCanonical (A := A) d)).toFun y
  by_cases hy : y = x
  * subst hy
    rw [Valuation.update_toFun_self, Valuation.update_toFun_self]
  * rw [Valuation.update_toFun_of_ne ? d hy,
    Valuation.update_toFun_of_ne (checkVal (A := A) ?)
    (setToCanonical (A := A) d) hy]
  rfl

omit [DecidableEq Var] in
theorem checkVal_empty :
  checkVal (A := A) (Valuation.empty : Valuation Var (Set Nat)) =
    Valuation.default (finsetToCanonical (A := A) {}) := by
  refine Valuation.ext ?_ ?_
  * rfl
  * funext _x
    exact setToCanonical_empty (A := A)

/-!
## Membership commutation
-/

theorem interpVA_checkVal_mem (M : Lam Var) (? : Valuation Var (Set Nat))
  (n : Nat) :
  memOfNat (A := A) (interpVA (A := A) M (checkVal (A := A) ?)) n =
    if n in interp (engelerReflexiveDcpo engelerPair engelerPair_injective)
      M ? then top else False := by
  induction M generalizing ? n with
  | var x =>
    change memOfNat (A := A) (setToCanonical (A := A) (?.toFun x)) n =
      if n in ?.toFun x then top else False
    exact memOfNat_setToCanonical (A := A) (?.toFun x) n
  | app M N ihM ihN =>
    simp only [interpVA]
    rw [memB_ofNat_engelerAppVA]
    have hN : eqB (child? (A := A) (interpVA (A := A) N (checkVal ?)))
      (check (setPSet (interp engelerDcpo N ?))) = top := by
      refine eqB_top_trans (A := A) ?_
      (eqB_setToCanonical (A := A) (interp engelerDcpo N ?))
      refine eqB_canonical_of_memB_ofNat (A := A) fun k => ?_
      change memOfNat (A := A) (interpVA (A := A) N (checkVal ?)) k =
        memOfNat (A := A) (setToCanonical (interp engelerDcpo N ?)) k
      rw [ihN ? k, memOfNat_setToCanonical]
    have hsubset (K : Finset Nat) :
      subsetB (check (A := A) (finsetPSet K))
        (child? (interpVA (A := A) N (checkVal ?))) =
      if (K : Set Nat) subseq interp engelerDcpo N ? then top else False := by
      rw [eqB_top_subsetB_right hN, subsetB_finsetPSet_setPSet_eq]
    have hpair (K : Finset Nat) :
      memB (pairApplyB (A := A) K n)

```

```

      (child? (interpVA (A := A) M (checkVal ?))) =
    if engelerPair (K, n) in interp engelerDcpo M ? then top else False := by
change memOfNat (A := A) (interpVA (A := A) M (checkVal ?))
  (engelerPair (K, n)) = _
exact ihM ? (engelerPair (K, n))
have hcalc :
  (bigcup K : Finset Nat,
    subsetB (check (finsetPSet K))
      (child? (interpVA (A := A) N (checkVal ?))) sqcap
      memB (pairApplyB (A := A) K n)
      (child? (interpVA (A := A) M (checkVal ?)))) =
  if n in engelerApp engelerPair
    (interp engelerDcpo M ?) (interp engelerDcpo N ?)
  then top else False := by
refine Eq.trans (iSup_congr fun K => ?_)
  (iSup_indicator_engelerApp (A := A)
    (interp engelerDcpo M ?) (interp engelerDcpo N ?) n)
rw [hsubset K, hpair K]
refine hcalc.trans ?_
rw [interp_app, ReflexiveDcpo.app]
rfl
| abs x M ih =>
  simp only [interpVA]
  rw [memB_ofNat_engelerLamVA]
  have hf (K : Finset Nat) :
    interpVA (A := A) M
      ((checkVal (A := A) ?).update x
        (finsetToCanonical (A := A) K)) =
    interpVA (A := A) M
      (checkVal (A := A) (? .update x (K : Set Nat))) := by
  rw [← setToCanonical_coe, ← checkVal_update]
  have hmem (K : Finset Nat) (m : Nat) :
    memOfNat (A := A)
      (interpVA (A := A) M
        ((checkVal ?).update x (finsetToCanonical (A := A) K))) m =
    if m in interp engelerDcpo M (? .update x (K : Set Nat))
    then top else False := by
  rw [hf K]
  exact ih (? .update x (K : Set Nat)) m
have hcalc :
  (bigcup K : Finset Nat, bigcup m : Nat,
    eqB (check (PSet.ofNat n)) (pairApplyB (A := A) K m) sqcap
    memOfNat (interpVA (A := A) M
      ((checkVal ?).update x (finsetToCanonical (A := A) K))) m) =
  if n in engelerLam engelerPair
    (fun d => interp engelerDcpo M (? .update x d))
  then top else False := by
refine Eq.trans
  (iSup_congr fun K => iSup_congr fun m => ?_)
  (iSup_indicator_engelerLam (A := A)
    (fun d => interp engelerDcpo M (? .update x d)) n)
  rw [eqB_ofNat_pairApplyB, hmem]
refine hcalc.trans ?_
rw [interp_abs]
rfl

/-!
## Paper names
-/

```

Lean 4 source (lines 401–429)

```

/-- Lemma 31: `??check M?^A_{check ?} = ?M?_?? = 1`. The free-variable
side condition is the paper's hypothesis; interpretation uses `toFun`. -/

```

```

theorem lemma_31 (M : Lam Var) (? : Valuation Var (Set Nat))
  (hfv : M.fv subseq ? .domain) :
  eqB (child? (A := A) (interpVA (A := A) M (checkVal (A := A) ?)))
    (child? (setToCanonical (A := A)
      (interp (engelerReflexiveDcpo engelerPair engelerPair_injective)
        M ?))) = top := by
  let _ := hfv
  refine eqB_canonical_of_memB_ofNat (A := A) fun n => ?_
  change memOfNat (A := A) (interpVA (A := A) M (checkVal ?)) n =
    memOfNat (A := A)
      (setToCanonical (interp
        (engelerReflexiveDcpo engelerPair engelerPair_injective) M ?)) n
  rw [interpVA_checkVal_mem, memOfNat_setToCanonical]

/-- Lemma 31, closed case: `??check M?^A = ?M?? = 1`, since `{}` = check `{}`. -/
theorem lemma_31_closed (M : Lam Var) (hcl : M.fv = {}) :
  eqB (child? (interpClosedVA (A := A) M))
    (child? (setToCanonical (interpClosed
      (engelerReflexiveDcpo engelerPair engelerPair_injective) M))) = top := by
  have hfv : M.fv subseq (Valuation.empty : Valuation Var (Set Nat)).domain := by
    rw [hcl, Valuation.empty_domain]
  rw [interpClosedVA, <- checkVal_empty, interpClosed]
  exact lemma_31 (A := A) M Valuation.empty hfv

end

end Scott2026

```

A.34 Scott2026/Corollary34.lean

522 lines.

Lean 4 source (lines 1–400)

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/

import Scott2026.Lemma31
import Scott2026.Theorem30Internal

/-!
# Corollary 34: reflexive continuous lattice with numerals in `V^A`

Furber-Mardare-Panangaden-Scott, CSL 2026, Corollary 34. The paper says
the Engeler model in `V^A` (Theorem 30) is a reflexive continuous lattice
with numerals, given check of the Church Booleans and numerals, with the
whole statement interpreted in `V^A`.

The paper name is `corollary_34`: one internal conjunction that
`P^A(checkExt ?)` is a reflexive continuous lattice with numerals.
`corollary_34_check` remains the check/VA numeral fragment (Lemma 31
commutation plus Definition 32(ii)-(iv) on `interpClosedVA`). The
continuous-lattice half is `isContinuousLatticeSubsetB_powerB`; the base
is `isBaseSubsetB_pfinB_powerB` (not named `proposition_28`); the
reflexive dcpo is `theorem_30_va`. Internal `<->` finite `subseq` is
`wayBelowSubsetB_eq_finite_subset`.

Proof sketch (vision 11.786-788):
* Lemma 31: `??check M?^A = check(?M?)? = 1` for closed Church `top`, `False`,
  `c_n`.

```



```

* Definition 32(i) is `Delta_0` (`not x = y`), so Theorem 2 (`jech_lemma_14_21`)
  applied to Proposition 33's ground distinctness.
* Parts (ii)-(iv) transfer by `interpClosedVA_sound_full` /
  `theorem_26_sound_full` (`[Infinite Var]`, `Nat`). Example 24
  (`example_24_subset`) places those `fun`-equations in `check(fun) subseq fun ^A`.
-/

universe u

namespace Scott2026

open AName
open Classical

variable {A : Type u} [CompleteBooleanAlgebra A]

noncomputable section

/-!
## Boolean-equality transport
-/

theorem eqB_top_congr_left {x x' y : AName.{u} A} (h : eqB x x' = top) :
  eqB x y = eqB x' y := by
  refine le_antisymm ?le ?ge
  * have htr := eqB_trans x' x y
    rw [eqB_comm (x := x') (y := x), h, top_inf_eq] at htr
    exact htr
  * have htr := eqB_trans x x' y
    rw [h, top_inf_eq] at htr
    exact htr

theorem eqB_top_congr_right {x y y' : AName.{u} A} (h : eqB y y' = top) :
  eqB x y = eqB x y' := by
  rw [eqB_comm x y, eqB_comm x y', eqB_top_congr_left h]

theorem eqB_top_congr {x x' y y' : AName.{u} A}
  (hx : eqB x x' = top) (hy : eqB y y' = top) :
  eqB x y = eqB x' y' := by
  rw [eqB_top_congr_left hx, eqB_top_congr_right hy]

/-!
## Check/VA commutation (Lemma 31 on Church terms)
-/

variable {Var : Type*} [DecidableEq Var]

/-- Lemma 31, closed case, specialized to a closed term. -/
theorem lemma_31_closed_term (M : Lam Var) (hcl : M.fv = {}) :
  eqB (child? (interpClosedVA (A := A) M))
    (child? (setToCanonical (interpClosed
      (engelerReflexiveDcpo engelerPair engelerPair_injective) M))) = top :=
  lemma_31_closed (A := A) M hcl

/-- Strictness of the canonical carrier upgrades Lemma 31's `eqB = top` to
index equality `interpClosedVA M = setToCanonical ?M?`. -/
theorem interpClosedVA_eq_setToCanonical (M : Lam Var) (hcl : M.fv = {}) :
  interpClosedVA (A := A) M =
    setToCanonical (interpClosed
      (engelerReflexiveDcpo engelerPair engelerPair_injective) M) := by
  refine (canonicalPowerSetoid_isStrict (check (A := A) PSet.omega))
    (interpClosedVA (A := A) M)
    (setToCanonical (interpClosed

```

```

    (engelerReflexiveDcpo engelerPair engelerPair_injective) M)) ?_
rw [canonicalPowerSetoid_eq, oid_eq_powerB]
exact lemma_31_closed (A := A) M hcl

theorem lemma_31_closed_churchTrue :
  eqB (child? (interpClosedVA (A := A) churchTrue))
    (child? (setToCanonical (interpClosed
      (engelerReflexiveDcpo engelerPair engelerPair_injective)
      churchTrue)))) = top :=
  lemma_31_closed (A := A) churchTrue churchTrue_fv

theorem lemma_31_closed_churchFalse :
  eqB (child? (interpClosedVA (A := A) churchFalse))
    (child? (setToCanonical (interpClosed
      (engelerReflexiveDcpo engelerPair engelerPair_injective)
      churchFalse)))) = top :=
  lemma_31_closed (A := A) churchFalse churchFalse_fv

theorem lemma_31_closed_churchNum (n : Nat) :
  eqB (child? (interpClosedVA (A := A) (churchNum n)))
    (child? (setToCanonical (interpClosed
      (engelerReflexiveDcpo engelerPair engelerPair_injective)
      (churchNum n))))) = top :=
  lemma_31_closed (A := A) (churchNum n) (churchNum_fv n)

theorem lemma_31_closed_churchTrueN :
  eqB (child? (interpClosedVA (A := A) churchTrueN))
    (child? (setToCanonical (interpClosed
      (engelerReflexiveDcpo engelerPair engelerPair_injective)
      churchTrueN)))) = top :=
  lemma_31_closed (A := A) churchTrueN churchTrueN_fv

theorem lemma_31_closed_churchFalseN :
  eqB (child? (interpClosedVA (A := A) churchFalseN))
    (child? (setToCanonical (interpClosed
      (engelerReflexiveDcpo engelerPair engelerPair_injective)
      churchFalseN)))) = top :=
  lemma_31_closed (A := A) churchFalseN churchFalseN_fv

theorem lemma_31_closed_churchNumN (n : Nat) :
  eqB (child? (interpClosedVA (A := A) (churchNumN n)))
    (child? (setToCanonical (interpClosed
      (engelerReflexiveDcpo engelerPair engelerPair_injective)
      (churchNumN n))))) = top :=
  lemma_31_closed (A := A) (churchNumN n) (churchNumN_fv n)

theorem interpClosedVA_churchTrue :
  interpClosedVA (A := A) churchTrue =
  setToCanonical (interpClosed
    (engelerReflexiveDcpo engelerPair engelerPair_injective)
    churchTrue) :=
  interpClosedVA_eq_setToCanonical (A := A) churchTrue churchTrue_fv

theorem interpClosedVA_churchFalse :
  interpClosedVA (A := A) churchFalse =
  setToCanonical (interpClosed
    (engelerReflexiveDcpo engelerPair engelerPair_injective)
    churchFalse) :=
  interpClosedVA_eq_setToCanonical (A := A) churchFalse churchFalse_fv

theorem interpClosedVA_churchNum (n : Nat) :
  interpClosedVA (A := A) (churchNum n) =
  setToCanonical (interpClosed

```

```

      (engelerReflexiveDcpo engelerPair engelerPair_injective)
      (churchNum n)) :=
interpClosedVA_eq_setToCanonical (A := A) (churchNum n) (churchNum_fv n)

theorem interpClosedVA_churchTrueN :
  interpClosedVA (A := A) churchTrueN =
    setToCanonical (interpClosed
      (engelerReflexiveDcpo engelerPair engelerPair_injective)
      churchTrueN) :=
  interpClosedVA_eq_setToCanonical (A := A) churchTrueN churchTrueN_fv

theorem interpClosedVA_churchFalseN :
  interpClosedVA (A := A) churchFalseN =
    setToCanonical (interpClosed
      (engelerReflexiveDcpo engelerPair engelerPair_injective)
      churchFalseN) :=
  interpClosedVA_eq_setToCanonical (A := A) churchFalseN churchFalseN_fv

theorem interpClosedVA_churchNumN (n : Nat) :
  interpClosedVA (A := A) (churchNumN n) =
    setToCanonical (interpClosed
      (engelerReflexiveDcpo engelerPair engelerPair_injective)
      (churchNumN n)) :=
  interpClosedVA_eq_setToCanonical (A := A) (churchNumN n) (churchNumN_fv n)

theorem setToCanonical_injective [Nontrivial A] :
  Function.Injective (setToCanonical (A := A)) := by
  intro S T hST
  ext n
  have hmem : memOfNat (A := A) (setToCanonical S) n =
    memOfNat (setToCanonical T) n := by rw [hST]
  rw [memOfNat_setToCanonical, memOfNat_setToCanonical] at hmem
  by_cases hS : n in S
  * rw [if_pos hS] at hmem
    by_cases hT : n in T
    * exact iff_of_true hS hT
    * rw [if_neg hT] at hmem
      exact (top_ne_bot hmem).elim
  * rw [if_neg hS] at hmem
    by_cases hT : n in T
    * rw [if_pos hT] at hmem
      exact (bot_ne_top hmem).elim
    * exact iff_of_false hS hT

/-!
## Definition 32(i) as a `Delta_0` statement (Theorem 2)
-/

/-- Ground Church Booleans remain distinct as `setPSet` pre-sets. -/
theorem churchTrue_interp_setPSet_not_equiv :
  not PSet.Equiv.{u, u}
    (setPSet (interpClosed
      (engelerReflexiveDcpo engelerPair engelerPair_injective)
      churchTrue))
    (setPSet (interpClosed
      (engelerReflexiveDcpo engelerPair engelerPair_injective)
      churchFalse)) :=
  setPSet_not_equiv_of_ne
    (churchTrue_interp_ne_churchFalse engelerPair engelerPair_injective)

/-- Assignment for the `Delta_0` formula `not x_0 = x_1`. -/
def setPSetAssign (S T : Set Nat) : Fin 2 -> PSet.{u} :=
  D0Formula.consPSet (setPSet S) (fun _ : Fin 1 => setPSet T)

```

```

theorem setPSetAssign_zero (S T : Set Nat) :
  setPSetAssign S T 0 = setPSet S :=
  DOFormula.consPSet_zero _ _

theorem setPSetAssign_one (S T : Set Nat) :
  setPSetAssign S T 1 = setPSet T := by
  change DOFormula.consPSet (setPSet S) (fun _ : Fin 1 => setPSet T) 1 =
  setPSet T
  rw [show (1 : Fin 2) = Fin.succ 0 from rfl]
  exact DOFormula.consPSet_succ (setPSet S) (fun _ : Fin 1 => setPSet T) 0

/-- Theorem 2 on `not x = y`: inequivalent ground sets have
`?check(setPSet S) = check(setPSet T)? = 0`. `Subsingleton A` collapses
`top = False`. -/
theorem eqB_check_setPSet_of_ne {S T : Set Nat} (hne : S != T) :
  eqB (check (A := A) (setPSet S)) (check (setPSet T)) = False := by
  rcases subsingleton_or_nontrivial A with hA | hA
  * exact Subsingleton.elim _ _
  * have : Nontrivial A := hA
    let phi : DOFormula 2 := DOFormula.not (DOFormula.eq 0 1)
    have hreal : phi.realize (setPSetAssign S T) := by
      change not PSet.Equiv (setPSetAssign S T 0) (setPSetAssign S T 1)
      rw [setPSetAssign_zero, setPSetAssign_one]
      exact setPSet_not_equiv_of_ne hne
    have htop : DOFormula.bval (A := A) phi
      (fun i => check (setPSetAssign S T i)) = top :=
      (jech_lemma_14_21 (A := A) phi (setPSetAssign S T)).mp hreal
    have hcompl :
      (eqB (check (A := A) (setPSetAssign S T 0))
        (check (setPSetAssign S T 1)))? = top := htop
    rw [setPSetAssign_zero S T, setPSetAssign_one S T] at hcompl
    rw [← compl_compl (eqB (check (A := A) (setPSet S)) (check (setPSet T))),
      hcompl, compl_top]

theorem eqB_check_setPSet_churchTrue_churchFalse :
  eqB (check (A := A)
    (setPSet (interpClosed
      (engelerReflexiveDcpo engelerPair engelerPair_injective)
      churchTrue)))
    (check (setPSet (interpClosed
      (engelerReflexiveDcpo engelerPair engelerPair_injective)
      churchFalse))) = False :=
  eqB_check_setPSet_of_ne (A := A)
    (churchTrue_interp_ne_churchFalse engelerPair engelerPair_injective)

/-- Transport Lemma 31 and `eqB_setToCanonical` through the `Delta_0` fact. -/
theorem eqB_interpClosedVA_churchTrue_churchFalse :
  eqB (child? (interpClosedVA (A := A) churchTrue))
    (child? (interpClosedVA churchFalse)) = False := by
  have hT := lemma_31_closed_churchTrue (A := A)
  have hF := lemma_31_closed_churchFalse (A := A)
  have hTc := eqB_setToCanonical (A := A)
    (interpClosed (engelerReflexiveDcpo engelerPair engelerPair_injective)
      churchTrue)
  have hFc := eqB_setToCanonical (A := A)
    (interpClosed (engelerReflexiveDcpo engelerPair engelerPair_injective)
      churchFalse)
  have hbot := eqB_check_setPSet_churchTrue_churchFalse (A := A)
  rw [eqB_top_congr hT hF, eqB_top_congr hTc hFc]
  exact hbot

/-- Under `Subsingleton A` every Boolean value collapses, so numeral

```

```

`eqB` never separates `n` from `m`. Injectivity therefore needs
`Nontrivial A`. -/
theorem eqB_interpClosedVA_churchNum_subsingleton [Subsingleton A]
  (n m : Nat) :
  eqB (child? (interpClosedVA (A := A) (churchNum n)))
    (child? (interpClosedVA (churchNum m))) = top :=
  Subsingleton.elim _ _

/-- Check/VA numeral injectivity: `??c_n?^A = ?c_m?^A? = 1` implies
`n = m`, via Lemma 31 and `churchNum_interp_injective`. -/
theorem churchNum_interpClosedVA_injective [Nontrivial A] {n m : Nat}
  (h : eqB (child? (interpClosedVA (A := A) (churchNum n)))
    (child? (interpClosedVA (churchNum m)))) = top ) : n = m := by
  have hn := lemma_31_closed_churchNum (A := A) n
  have hm := lemma_31_closed_churchNum (A := A) m
  have hcn := eqB_setToCanonical (A := A)
    (interpClosed (engelerReflexiveDcpo engelerPair engelerPair_injective)
      (churchNum n))
  have hcm := eqB_setToCanonical (A := A)
    (interpClosed (engelerReflexiveDcpo engelerPair engelerPair_injective)
      (churchNum m))
  have hground : eqB
    (check (A := A) (setPSet (interpClosed
      (engelerReflexiveDcpo engelerPair engelerPair_injective)
      (churchNum n))))
    (check (setPSet (interpClosed
      (engelerReflexiveDcpo engelerPair engelerPair_injective)
      (churchNum m)))) = top := by
    rwa [eqB_top_congr hn hm, eqB_top_congr hcn hcm] at h
  have hequiv :
    PSet.Equiv
      (setPSet (interpClosed
        (engelerReflexiveDcpo engelerPair engelerPair_injective)
        (churchNum n)))
      (setPSet (interpClosed
        (engelerReflexiveDcpo engelerPair engelerPair_injective)
        (churchNum m)))) :=
    (check_atomic (A := A)
      (setPSet (interpClosed
        (engelerReflexiveDcpo engelerPair engelerPair_injective)
        (churchNum n)))
      (setPSet (interpClosed
        (engelerReflexiveDcpo engelerPair engelerPair_injective)
        (churchNum m)))).1.mp hground
  have hsets :
    interpClosed (engelerReflexiveDcpo engelerPair engelerPair_injective)
      (churchNum n) =
    interpClosed (engelerReflexiveDcpo engelerPair engelerPair_injective)
      (churchNum m) :=
    setPSet_equiv_iff.mp hequiv
  exact churchNum_interp_injective engelerPair engelerPair_injective hsets

/-!
## Definition 32(ii)-(iv) on the Theorem 30 carrier

Do not re-prove `definition_32`. Transfer the `LamEq` identities by
`interpClosedVA_sound_full` / `theorem_26_sound_full`. The same identities
lie in `check(fun ) subseq fun ^A` by Example 24 (`example_24_subset`).
-/

theorem interpClosedVA_churchIfN_true (M N : Lam Nat) :
  interpClosedVA (A := A) (((churchIfN.app churchTrueN).app M).app N) =
  interpClosedVA M :=

```

```

interpClosedVA_sound_full (A := A) (churchIfN_true M N)

theorem interpClosedVA_churchIfN_false (M N : Lam Nat) :
  interpClosedVA (A := A) (((churchIfN.app churchFalseN).app M).app N) =
  interpClosedVA N :=
  interpClosedVA_sound_full (A := A) (churchIfN_false M N)

theorem interpClosedVA_churchSucc (n : Nat) :
  interpClosedVA (A := A) (churchSucc.app (churchNumN n)) =
  interpClosedVA (churchNumN (n + 1)) :=
  interpClosedVA_sound_full (A := A) (churchSucc_num n)

theorem interpClosedVA_churchPred_succ (n : Nat) :
  interpClosedVA (A := A) (churchPred.app (churchNumN (n + 1))) =
  interpClosedVA (churchNumN n) :=
  interpClosedVA_sound_full (A := A) (churchPred_succ n)

theorem interpClosedVA_churchPred_zero :
  interpClosedVA (A := A) (churchPred.app (churchNumN 0)) =
  interpClosedVA (churchNumN 0) :=
  interpClosedVA_sound_full (A := A) churchPred_zero

theorem interpClosedVA_churchIsZero_zero :
  interpClosedVA (A := A) (churchIsZero.app (churchNumN 0)) =
  interpClosedVA churchTrueN :=
  interpClosedVA_sound_full (A := A) churchIsZero_zero

theorem interpClosedVA_churchIsZero_succ (n : Nat) :
  interpClosedVA (A := A) (churchIsZero.app (churchNumN (n + 1))) =
  interpClosedVA churchFalseN :=
  interpClosedVA_sound_full (A := A) (churchIsZero_succ n)

/-- Definition 32(ii)-(iv) as equalities of `interpClosedVA`. -/
theorem definition_32_interpClosedVA :
  (forall M N : Lam Nat,
    interpClosedVA (A := A) (((churchIfN.app churchTrueN).app M).app N) =
    interpClosedVA M) /\
  (forall M N : Lam Nat,
    interpClosedVA (A := A) (((churchIfN.app churchFalseN).app M).app N) =
    interpClosedVA N) /\
  (forall n, interpClosedVA (A := A) (churchSucc.app (churchNumN n)) =
    interpClosedVA (churchNumN (n + 1))) /\
  (forall n, interpClosedVA (A := A) (churchPred.app (churchNumN (n + 1))) =
    interpClosedVA (churchNumN n)) /\
  interpClosedVA (A := A) (churchPred.app (churchNumN 0)) =
  interpClosedVA (churchNumN 0) /\
  interpClosedVA (A := A) (churchIsZero.app (churchNumN 0)) =
  interpClosedVA churchTrueN /\
  (forall n, interpClosedVA (A := A) (churchIsZero.app (churchNumN (n + 1))) =
    interpClosedVA churchFalseN) :=
  <interpClosedVA_churchIfN_true (A := A),
  interpClosedVA_churchIfN_false (A := A),
  interpClosedVA_churchSucc (A := A),
  interpClosedVA_churchPred_succ (A := A),
  interpClosedVA_churchPred_zero (A := A),
  interpClosedVA_churchIsZero_zero (A := A),

```

Lean 4 source (lines 401–522)

```

interpClosedVA_churchIsZero_succ (A := A)>

/-- Corollary 34, check/VA fragment. The paper name `corollary_34` is the
internal statement ?`P`A(checkExt ?)` is a reflexive continuous lattice
with numerals?; this lemma remains the numeral identities and check/VA

```

```

commutation. The continuous-lattice half is
`isContinuousLatticeSubsetB_powerB`; the base is
`isBaseSubsetB_pfinB_powerB`; the reflexive dcpo is `theorem_30_va`. -/
theorem corollary_34_check :
  (interpClosedVA (A := A) churchTrue =
    setToCanonical (interpClosed
      (engelerReflexiveDcpo engelerPair engelerPair_injective)
      churchTrue)) /\
  (interpClosedVA (A := A) churchFalse =
    setToCanonical (interpClosed
      (engelerReflexiveDcpo engelerPair engelerPair_injective)
      churchFalse)) /\
  (forall n, interpClosedVA (A := A) (churchNum n) =
    setToCanonical (interpClosed
      (engelerReflexiveDcpo engelerPair engelerPair_injective)
      (churchNum n))) /\
  (eqB (child? (interpClosedVA (A := A) churchTrue))
    (child? (interpClosedVA churchFalse)) = False) /\
  (Nontrivial A ->
    forall n m, eqB (child? (interpClosedVA (A := A) (churchNum n)))
      (child? (interpClosedVA (churchNum m))) = top -> n = m) /\
  (forall M N : Lam Nat,
    interpClosedVA (A := A) (((churchIfN.app churchTrueN).app M).app N) =
      interpClosedVA M) /\
  (forall M N : Lam Nat,
    interpClosedVA (A := A) (((churchIfN.app churchFalseN).app M).app N) =
      interpClosedVA N) /\
  (forall n, interpClosedVA (A := A) (churchSucc.app (churchNumN n)) =
    interpClosedVA (churchNumN (n + 1))) /\
  (forall n, interpClosedVA (A := A) (churchPred.app (churchNumN (n + 1))) =
    interpClosedVA (churchNumN n)) /\
  interpClosedVA (A := A) (churchPred.app (churchNumN 0)) =
    interpClosedVA (churchNumN 0) /\
  interpClosedVA (A := A) (churchIsZero.app (churchNumN 0)) =
    interpClosedVA churchTrueN /\
  (forall n, interpClosedVA (A := A) (churchIsZero.app (churchNumN (n + 1))) =
    interpClosedVA churchFalseN) :=
  <interpClosedVA_churchTrue (A := A),
    interpClosedVA_churchFalse (A := A),
    interpClosedVA_churchNum (A := A),
    eqB_interpClosedVA_churchTrue_churchFalse (A := A),
    fun hA n m h =>
      haveI : Nontrivial A := hA
      churchNum_interpClosedVA_injective (A := A) (n := n) (m := m) h,
      interpClosedVA_churchIfN_true (A := A),
      interpClosedVA_churchIfN_false (A := A),
      interpClosedVA_churchSucc (A := A),
      interpClosedVA_churchPred_succ (A := A),
      interpClosedVA_churchPred_zero (A := A),
      interpClosedVA_churchIsZero_zero (A := A),
      interpClosedVA_churchIsZero_succ (A := A)>

/-- The proposition packaged by `corollary_34_check`. A theorem cannot
appear as an `/\`-conjunct, so the paper statement names this type. -/
def Corollary34Check : Prop :=
  (interpClosedVA (A := A) churchTrue =
    setToCanonical (interpClosed
      (engelerReflexiveDcpo engelerPair engelerPair_injective)
      churchTrue)) /\
  (interpClosedVA (A := A) churchFalse =
    setToCanonical (interpClosed
      (engelerReflexiveDcpo engelerPair engelerPair_injective)
      churchFalse)) /\

```

```

(forall n, interpClosedVA (A := A) (churchNum n) =
  setToCanonical (interpClosed
    (engelerReflexiveDcpo engelerPair engelerPair_injective)
    (churchNum n))) /\
(eqB (child? (interpClosedVA (A := A) churchTrue))
  (child? (interpClosedVA churchFalse)) = False) /\
(Nontrivial A ->
  forall n m, eqB (child? (interpClosedVA (A := A) (churchNum n)))
    (child? (interpClosedVA (churchNum m)))) = top -> n = m) /\
(forall M N : Lam Nat,
  interpClosedVA (A := A) (((churchIfN.app churchTrueN).app M).app N) =
  interpClosedVA M) /\
(forall M N : Lam Nat,
  interpClosedVA (A := A) (((churchIfN.app churchFalseN).app M).app N) =
  interpClosedVA N) /\
(forall n, interpClosedVA (A := A) (churchSucc.app (churchNumN n)) =
  interpClosedVA (churchNumN (n + 1))) /\
(forall n, interpClosedVA (A := A) (churchPred.app (churchNumN (n + 1))) =
  interpClosedVA (churchNumN n)) /\
interpClosedVA (A := A) (churchPred.app (churchNumN 0)) =
  interpClosedVA (churchNumN 0) /\
interpClosedVA (A := A) (churchIsZero.app (churchNumN 0)) =
  interpClosedVA churchTrueN /\
(forall n, interpClosedVA (A := A) (churchIsZero.app (churchNumN (n + 1))) =
  interpClosedVA churchFalseN)

/-- Corollary 34: the Engeler model in `V^A` is a reflexive continuous
lattice with numerals. Distinctness and `theorem_30_va` need
`[Nontrivial A]`. `Corollary34Check` is the type of `corollary_34_check`;
the last two conjuncts restate Definition 32(i) at Boolean `False` / numeral
injectivity without the `Nontrivial A ->` wrapper. -/
theorem corollary_34 [Nontrivial A] :
  isReflexiveDcpoB (engelerD (A := A)) (engelerR (A := A))
    (engelerC (A := A)) (engelerQ (A := A))
    (engelerFun (A := A)) (engelerLamB (A := A)) = top /\
  isContinuousLatticeSubsetB (engelerD (A := A)) = top /\
  isBaseSubsetB (pfinB (checkExt (A := A) PSet.omega))
    (engelerD (A := A)) = top /\
  Corollary34Check (A := A) /\
  (eqB (child? (interpClosedVA (A := A) churchTrue))
    (child? (interpClosedVA churchFalse)) = False) /\
  (forall n m, eqB (child? (interpClosedVA (A := A) (churchNum n)))
    (child? (interpClosedVA (churchNum m)))) = top -> n = m) :=
<theorem_30_va (A := A),
  isContinuousLatticeSubsetB_powerB (checkExt (A := A) PSet.omega),
  isBaseSubsetB_pfinB_powerB (checkExt (A := A) PSet.omega),
  corollary_34_check (A := A),
  eqB_interpClosedVA_churchTrue_churchFalse (A := A),
  fun n m h =>
    churchNum_interpClosedVA_injective (A := A) (n := n) (m := m) h>

end

end Scott2026

```

A.35 Scott2026/Lemma35General.lean

642 lines.

Lean 4 source (lines 1–400)

/-

Copyright (c) 2026 Lars Warren Ericson. All rights reserved.

Released under Apache 2.0 license as described in the file LICENSE.

Authors: Lars Warren Ericson.

-/

```
import Scott2026.Interp
import Scott1972.ContinuousLattice.Constructions
```

/-!

Lemma 35 for arbitrary reflexive dcpos with numerals

The paper derives numeral-separating closed terms from Definition 32. `NumeralSeparators` records their denotations. `churchWithNumerals` plus `numeralSeparators\_church` instantiate that interface from Church interpretations, so the paper-named theorems `lemma\_35\_i\_of` / `lemma\_35\_ii\_of` / `lemma\_35\_of` do not take `NumeralSeparators` as an extra hypothesis. Engeler `lemma\_35` keeps its original name and proof.

-/

universe u

namespace Scott2026

open Set

/-- Denotations of negation and the derived `m?` tests used in the proof of Lemma 35(i). -/

```
structure NumeralSeparators (D : Type u) [CompleteLattice D]
```

```
  (R : ReflexiveDcpoWithNumerals D) where
```

```
  neg : D
```

```
  neg_top : R.app neg R.boolTop = R.boolBot
```

```
  neg_bot : R.app neg R.boolBot = R.boolTop
```

```
  test : Nat -> D
```

```
  test_spec : forall m n,
```

```
    R.app (test m) (R.numeral n) =
```

```
      if n = m then R.boolTop else R.boolBot
```

/-- The two Boolean denotations can be separated by Scott opens in both directions, using denotational negation exactly as in the paper. -/

theorem lemma_35_bool_discrete_general {D : Type u} [CompleteLattice D]

```
  (R : ReflexiveDcpoWithNumerals D) (H : NumeralSeparators D R) :
```

```
  exists U V : Set D, ScottOpen U /\ ScottOpen V /\
```

```
    R.boolTop in U /\ R.boolBot notin U /\
```

```
    R.boolBot in V /\ R.boolTop notin V := by
```

```
have hsep : not R.boolBot <= R.boolTop /\ not R.boolTop <= R.boolBot := by
```

```
  by_contra h
```

```
  push Not at h
```

```
  exact R.bool_ne (le_antisymm h.1 h.2)
```

```
rcases hsep with hbt | htb
```

```
* let V : Set D := {z | not z <= R.boolTop}
```

```
  let U : Set D := (fun z => R.app H.neg z) ^-1' V
```

```
  have hV : ScottOpen V := scottOpen_not_le R.boolTop
```

```
  have happ : IsScottContinuous (fun z => R.app H.neg z) :=
```

```
    R.fun_scott_pt H.neg
```

```
  have hU : ScottOpen U := scottOpen_preimage happ hV
```

```
  refine <U, V, hU, hV, ?_, ?_, ?_, ?_>
```

```
* change R.app H.neg R.boolTop in V
```

```
  rw [H.neg_top]
```

```
  exact hbt
```

```
* intro h
```

```
  change R.app H.neg R.boolBot in V at h
```

```
  rw [H.neg_bot] at h
```

```
  exact h le_rfl
```

```
* exact hbt
```

```

* intro h
  exact h le_rfl
* let U : Set D := {z | not z <= R.boolBot}
  let V : Set D := (fun z => R.app H.neg z) ^-1' U
  have hU : ScottOpen U := scottOpen_not_le R.boolBot
  have happ : IsScottContinuous (fun z => R.app H.neg z) :=
    R.fun_scott_pt H.neg
  have hV : ScottOpen V := scottOpen_preimage happ hU
  refine <U, V, hU, hV, ?_, ?_, ?_, ?_>
* exact htb
* intro h
  exact h le_rfl
* change R.app H.neg R.boolBot in U
  rw [H.neg_bot]
  exact htb
* intro h
  change R.app H.neg R.boolTop in U at h
  rw [H.neg_top] at h
  exact h le_rfl

/-- Every numeral is isolated in the numeral subspace by a Scott-open set. -/
theorem lemma_35_numeral_discrete_general {D : Type u} [CompleteLattice D]
  (R : ReflexiveDcpoWithNumerals D) (H : NumeralSeparators D R) :
  forall m : Nat, exists W : Set D, ScottOpen W /\
    R.numeral m in W /\
    forall n, n != m -> R.numeral n notin W := by
  obtain <U, _V, hU, _hV, htop, hbot, _> :=
    lemma_35_bool_discrete_general R H
  intro m
  let W : Set D := (fun z => R.app (H.test m) z) ^-1' U
  have hW : ScottOpen W :=
    scottOpen_preimage (R.fun_scott_pt (H.test m)) hU
  refine <W, hW, ?_, ?_>
* change R.app (H.test m) (R.numeral m) in U
  rw [H.test_spec, if_pos rfl]
  exact htop
* intro n hnm hn
  change R.app (H.test m) (R.numeral n) in U at hn
  rw [H.test_spec, if_neg hnm] at hn
  exact hbot hn

/-- Lemma 35(i) at the paper's arbitrary-domain type. -/
theorem lemma_35_i_general {D : Type u} [CompleteLattice D]
  (R : ReflexiveDcpoWithNumerals D) (H : NumeralSeparators D R) :
  (exists U V : Set D, ScottOpen U /\ ScottOpen V /\
    R.boolTop in U /\ R.boolBot notin U /\
    R.boolBot in V /\ R.boolTop notin V) /\
  (forall m : Nat, exists W : Set D, ScottOpen W /\
    R.numeral m in W /\
    forall n, n != m -> R.numeral n notin W) /\
  Function.Injective R.numeral :=
  <lemma_35_bool_discrete_general R H,
    lemma_35_numeral_discrete_general R H,
    R.numeral_inj>

/-!
## Church numerals as the paper's distinguished elements

Definition 32's Booleans and numerals are Church interpretations. The
algebraic `ReflexiveDcpoWithNumerals` does not store `if`/`pred`/`0?`;
those appear only as closed-term denotations.
-/>

```

noncomputable section

open Topology

```
theorem churchTrue_interpClosed {D : Type u} [CompleteLattice D]
  (R : ReflexiveDcpo D) :
  interpClosed R churchTrue = R.lam fun X => R.lam fun _ => X := by
  simp [interpClosed, churchTrue, interp, Valuation.update, Valuation.empty,
    Function.update]

theorem churchTrueN_interpClosed {D : Type u} [CompleteLattice D]
  (R : ReflexiveDcpo D) :
  interpClosed R churchTrueN = R.lam fun X => R.lam fun _ => X := by
  simp [interpClosed, churchTrueN, interp, Valuation.update, Valuation.empty,
    Function.update]

theorem churchFalse_interpClosed {D : Type u} [CompleteLattice D]
  (R : ReflexiveDcpo D) :
  interpClosed R churchFalse = R.lam fun _ => R.lam fun Y => Y := by
  simp [interpClosed, churchFalse, interp, Valuation.update, Valuation.empty,
    Function.update]

theorem churchFalseN_interpClosed {D : Type u} [CompleteLattice D]
  (R : ReflexiveDcpo D) :
  interpClosed R churchFalseN = R.lam fun _ => R.lam fun Y => Y := by
  simp [interpClosed, churchFalseN, interp, Valuation.update, Valuation.empty,
    Function.update]

theorem churchTrue_interpClosed_eq_churchTrueN {D : Type u} [CompleteLattice D]
  (R : ReflexiveDcpo D) :
  interpClosed R churchTrue = interpClosed R churchTrueN := by
  rw [churchTrue_interpClosed, churchTrueN_interpClosed]

theorem churchFalse_interpClosed_eq_churchFalseN {D : Type u} [CompleteLattice D]
  (R : ReflexiveDcpo D) :
  interpClosed R churchFalse = interpClosed R churchFalseN := by
  rw [churchFalse_interpClosed, churchFalseN_interpClosed]

theorem churchNum_interpClosed_zero {D : Type*} [CompleteLattice D]
  (R : ReflexiveDcpo D) :
  interpClosed R (churchNum 0) = R.lam fun _ => R.lam fun Y => Y := by
  simp [interpClosed, churchNum, interp, Valuation.update, Valuation.empty,
    Function.update]

theorem churchNumN_interpClosed_zero {D : Type*} [CompleteLattice D]
  (R : ReflexiveDcpo D) :
  interpClosed R (churchNumN 0) = R.lam fun _ => R.lam fun Y => Y := by
  simp [interpClosed, churchNumN, interp, Valuation.update, Valuation.empty,
    Function.update]

theorem churchNum_interpClosed_succ {D : Type*} [CompleteLattice D]
  (R : ReflexiveDcpo D) (n : Nat) :
  interpClosed R (churchNum (n + 1)) =
    R.lam fun F => R.lam fun X =>
      R.app F (R.app (R.app (interpClosed R (churchNum n)) F) X) := by
  have h1 : interpClosed R (churchNum (n + 1)) =
    R.lam fun F =>
      interp R
        (Lam.abs 1
          (Lam.app (Lam.var 0)
            (Lam.app (Lam.app (churchNum n) (Lam.var 0)) (Lam.var 1))))
    (Valuation.empty.update (0 : Fin 2) F) := by
  simp [interpClosed, churchNum, interp]
```

```

refine h1.trans ?_
congr 1
funext F
simp only [interp]
congr 1
funext X
have hcn : interp R (churchNum n)
  ((Valuation.empty.update (0 : Fin 2) F).update 1 X) =
    interpClosed R (churchNum n) :=
      interp_closed_of_fv_empty R (churchNum n) _ (churchNum_fv n)
have h0 : ((Valuation.empty.update (0 : Fin 2) F).update 1 X).toFun 0 = F :=
  Valuation.update_toFun_of_ne (Valuation.empty.update (0 : Fin 2) F)
    (x := 1) (y := 0) X Fin.zero_ne_one
have hX : ((Valuation.empty.update (0 : Fin 2) F).update 1 X).toFun 1 = X :=
  Valuation.update_toFun_self _ 1 X
simp [interp, h0, hX, hcn]

theorem churchNumN_interpClosed_succ {D : Type*} [CompleteLattice D]
  (R : ReflexiveDcpo D) (n : Nat) :
  interpClosed R (churchNumN (n + 1)) =
    R.lam fun F => R.lam fun X =>
      R.app F (R.app (R.app (interpClosed R (churchNumN n)) F) X) := by
have h1 : interpClosed R (churchNumN (n + 1)) =
  R.lam fun F =>
    interp R
      (Lam.abs 1
        (Lam.app (Lam.var 0)
          (Lam.app (Lam.app (churchNumN n) (Lam.var 0)) (Lam.var 1))))
      (Valuation.empty.update (0 : Nat) F) := by
  simp [interpClosed, churchNumN, interp]
refine h1.trans ?_
congr 1
funext F
simp only [interp]
congr 1
funext X
have hcn : interp R (churchNumN n)
  ((Valuation.empty.update (0 : Nat) F).update 1 X) =
    interpClosed R (churchNumN n) :=
      interp_closed_of_fv_empty R (churchNumN n) _ (churchNumN_fv n)
have h0 : ((Valuation.empty.update (0 : Nat) F).update 1 X).toFun 0 = F :=
  Valuation.update_toFun_of_ne (Valuation.empty.update (0 : Nat) F)
    (x := 1) (y := 0) X (by decide)
have hX : ((Valuation.empty.update (0 : Nat) F).update 1 X).toFun 1 = X :=
  Valuation.update_toFun_self _ 1 X
simp [interp, h0, hX, hcn]

/-- Closed interpretations of `churchNum` (`Fin 2`) and `churchNumN` (`Nat`)
agree: binders are only names. -/
theorem churchNum_interpClosed_eq_churchNumN {D : Type*} [CompleteLattice D]
  (R : ReflexiveDcpo D) (n : Nat) :
  interpClosed R (churchNum n) = interpClosed R (churchNumN n) := by
  induction n with
  | zero =>
    rw [churchNum_interpClosed_zero, churchNumN_interpClosed_zero]
  | succ n ih =>
    rw [churchNum_interpClosed_succ, churchNumN_interpClosed_succ, ih]

theorem numeral_eq_interpClosed_churchNumN (n : Nat) :
  engelerWithNumerals.numeral n =
    interpClosed engelerWithNumerals.toReflexiveDcpo (churchNumN n) := by
  rw [← churchNum_interpClosed_eq_churchNumN]
  rfl

```

```

theorem interpClosed_app {D : Type u} [CompleteLattice D] {Var : Type*}
  [DecidableEq Var] (R : ReflexiveDcpo D) (M N : Lam Var) :
  interpClosed R (M.app N) = R.app (interpClosed R M) (interpClosed R N) :=
  rfl

theorem interpClosed_churchNotN_true {D : Type u} [CompleteLattice D]
  (R : ReflexiveDcpo D) :
  R.app (interpClosed R churchNotN) (interpClosed R churchTrueN) =
    interpClosed R churchFalseN := by
  rw [ <- interpClosed_app]
  exact interpClosed_sound_full (Var := Nat) R churchNotN_true

theorem interpClosed_churchNotN_false {D : Type u} [CompleteLattice D]
  (R : ReflexiveDcpo D) :
  R.app (interpClosed R churchNotN) (interpClosed R churchFalseN) =
    interpClosed R churchTrueN := by
  rw [ <- interpClosed_app]
  exact interpClosed_sound_full (Var := Nat) R churchNotN_false

theorem interpClosed_churchTest_num {D : Type u} [CompleteLattice D]
  (R : ReflexiveDcpo D) (m n : Nat) :
  R.app (interpClosed R (churchTest m)) (interpClosed R (churchNumN n)) =
    if n = m then interpClosed R churchTrueN
    else interpClosed R churchFalseN := by
  rw [ <- interpClosed_app]
  have h := interpClosed_sound_full (Var := Nat) R (churchTest_num m n)
  rw [h]
  split_ifs <;> rfl

/-- Paper: `fun(?m??)(?c_m?) != fun(?m??)(?c_n?)` for `m != n`, so numerals
are distinct. -/
theorem numeral_inj_of_churchTest {D : Type u} [CompleteLattice D]
  (R : ReflexiveDcpo D)
  (hbool : interpClosed R churchTrueN != interpClosed R churchFalseN) :
  Function.Injective (fun n => interpClosed R (churchNumN n)) := by
  intro m n hmn
  by_contra hne
  have hm :
    R.app (interpClosed R (churchTest m)) (interpClosed R (churchNumN m)) =
      interpClosed R churchTrueN := by
  rw [interpClosed_churchTest_num, if_pos rfl]
  have hn :
    R.app (interpClosed R (churchTest m)) (interpClosed R (churchNumN n)) =
      interpClosed R churchFalseN := by
  rw [interpClosed_churchTest_num, if_neg (Ne.symm hne)]
  have happ :
    R.app (interpClosed R (churchTest m)) (interpClosed R (churchNumN m)) =
      R.app (interpClosed R (churchTest m)) (interpClosed R (churchNumN n)) :=
    congrArg (fun z => R.app (interpClosed R (churchTest m)) z) hmn
  exact hbool (hm.symm.trans (happ.trans hn))

/-- Church Booleans and numerals on an arbitrary reflexive dcpo. Distinctness
of numerals is the paper's `m?` argument, so it is not an extra hypothesis. -/
noncomputable def churchWithNumerals {D : Type u} [CompleteLattice D]
  (R : ReflexiveDcpo D)
  (hbool : interpClosed R churchTrueN != interpClosed R churchFalseN) :
  ReflexiveDcpoWithNumerals D where
  toReflexiveDcpo := R
  boolBot := interpClosed R churchFalseN
  boolTop := interpClosed R churchTrueN
  numeral := fun n => interpClosed R (churchNumN n)
  bool_ne := hbool.symm

```

```

numeral_inj := numeral_inj_of_churchTest R hbool

/-- Denotations of `not` and `m?` on `churchWithNumerals`. -/
noncomputable def numeralSeparators_church {D : Type u} [CompleteLattice D]
  (R : ReflexiveDcpo D)
  (hbool : interpClosed R churchTrueN != interpClosed R churchFalseN) :
  NumeralSeparators D (churchWithNumerals R hbool) where
neg := interpClosed R churchNotN
neg_top := interpClosed_churchNotN_true R
neg_bot := interpClosed_churchNotN_false R
test := fun m => interpClosed R (churchTest m)
test_spec := interpClosed_churchTest_num R

/-- When an existing numeral structure is already the Church interpretation,
the paper separators are the interpretations of `churchNotN` and `churchTest`. -/
noncomputable def numeralSeparators_of_churchInterp {D : Type u} [CompleteLattice D]
  (R : ReflexiveDcpoWithNumerals D)
  (hTop : R.boolTop = interpClosed R.toReflexiveDcpo churchTrueN)
  (hBot : R.boolBot = interpClosed R.toReflexiveDcpo churchFalseN)
  (hNum : forall n, R.numeral n = interpClosed R.toReflexiveDcpo (churchNumN n)) :
  NumeralSeparators D R where
neg := interpClosed R.toReflexiveDcpo churchNotN
neg_top := by
  rw [hTop, hBot]
  exact interpClosed_churchNotN_true R.toReflexiveDcpo
neg_bot := by
  rw [hTop, hBot]
  exact interpClosed_churchNotN_false R.toReflexiveDcpo
test := fun m => interpClosed R.toReflexiveDcpo (churchTest m)
test_spec := by
  intro m n
  rw [hNum n, hTop, hBot]
  exact interpClosed_churchTest_num R.toReflexiveDcpo m n

/-- Lemma 35(i) at paper type: discreteness from Church `not` and `m?`, with
numeral injectivity derived from the test equations. -/
theorem lemma_35_i_of {D : Type u} [CompleteLattice D] (R : ReflexiveDcpo D)
  (hbool : interpClosed R churchTrueN != interpClosed R churchFalseN) :
  (exists U V : Set D, ScottOpen U /\ ScottOpen V /\
    (churchWithNumerals R hbool).boolTop in U /\
    (churchWithNumerals R hbool).boolBot notin U /\
    (churchWithNumerals R hbool).boolBot in V /\
    (churchWithNumerals R hbool).boolTop notin V) /\
  (forall m : Nat, exists W : Set D, ScottOpen W /\
    (churchWithNumerals R hbool).numeral m in W /\
    forall n, n != m -> (churchWithNumerals R hbool).numeral n notin W) /\
  Function.Injective (fun n => interpClosed R (churchNumN n)) :=
lemma_35_i_general (churchWithNumerals R hbool) (numeralSeparators_church R hbool)

/-- Scott-topology continuity implies Mathlib directed-sup preservation
(lattice order, not the specialization `Preorder`). -/
theorem isScottContinuous_of_continuous {E F : Type*}
  [CompleteLattice E] [CompleteLattice F] {f : E -> F}
  (hf : @Continuous E F Scott1972.ContinuousLattice.scottTopologicalSpace
    Scott1972.ContinuousLattice.scottTopologicalSpace f) :
  IsScottContinuous f := by
have hE : @IsScott E univ _ (Topology.scott E univ) :=
  @IsScott.mk E univ _ (Topology.scott E univ) rfl
have hF : @IsScott F univ _ (Topology.scott F univ) :=
  @IsScott.mk F univ _ (Topology.scott F univ) rfl
exact scottContinuousOn_univ.1 <|
  (@Topology.IsScott.scottContinuousOn_iff_continuous E F _
    (Topology.scott E univ) _ (Topology.scott F univ) hf f univ hE

```

```

    (fun _ _ => trivial)).2 hf

/-- Characteristic values of `S` on the Church-numeral subspace. -/
noncomputable def churchNumeralChi {D : Type u} [CompleteLattice D]
  (R : ReflexiveDcpo D)
  (hbool : interpClosed R churchTrueN != interpClosed R churchFalseN)
  (S : Set Nat) (x : (range (churchWithNumerals R hbool).numeral)) : D :=
  chiNum (churchWithNumerals R hbool) S (Classical.choose x.property)

theorem churchNumeralChi_numeral {D : Type u} [CompleteLattice D]
  (R : ReflexiveDcpo D)
  (hbool : interpClosed R churchTrueN != interpClosed R churchFalseN)
  (S : Set Nat) (n : Nat) :
  churchNumeralChi R hbool S
    <(churchWithNumerals R hbool).numeral n, <n, rfl>> =
    chiNum (churchWithNumerals R hbool) S n := by
  have h := Classical.choose_spec
    <<n, rfl> : exists k, (churchWithNumerals R hbool).numeral k =
    (churchWithNumerals R hbool).numeral n)
  exact congrArg (chiNum (churchWithNumerals R hbool) S)

Lean 4 source (lines 401–642)

((churchWithNumerals R hbool).numeral_inj h)

theorem churchNumeral_subspace_singleton_open {D : Type u} [CompleteLattice D]
  (R : ReflexiveDcpo D)
  (hbool : interpClosed R churchTrueN != interpClosed R churchFalseN)
  (x : (range (churchWithNumerals R hbool).numeral)) :
  letI : TopologicalSpace D := Scott1972.ContinuousLattice.scottTopologicalSpace
  IsOpen ({x} : Set (range (churchWithNumerals R hbool).numeral)) := by
  let : TopologicalSpace D := Scott1972.ContinuousLattice.scottTopologicalSpace
  obtain <m, hm> := x.property
  obtain <W, hWopen, hmW, hsep> :=
    lemma_35_numeral_discrete_general (churchWithNumerals R hbool)
    (numeralSeparators_church R hbool) m
  have hW : IsOpen W :=
    Scott1972.ContinuousLattice.isOpen_iff_scottOpen.mpr hWopen
  have hpre :
    ({x} : Set (range (churchWithNumerals R hbool).numeral)) =
    (Subtype.val : (range (churchWithNumerals R hbool).numeral) -> D) ^-1'
    W := by
  ext y
  constructor
  * intro hy
    have hyx : y = x := mem_singleton_iff.mp hy
    rw [hyx]
    change (x : D) in W
    rw [← hm]
    exact hmW
  * intro hy
    obtain <n, hn> := y.property
    have hne : n = m := by
      by_contra hnm
      have : (churchWithNumerals R hbool).numeral n notin W := hsep n hnm
      rw [hn] at this
      exact this hy
    apply Subtype.ext
    rw [← hn, hne, hm]
  rw [hpre]
  exact IsOpen.preimage continuous_subtype_val hW

theorem scottOpen_supseteq {X : Type*} {S : Set X} (hS : S.Finite) :
  ScottOpen {V : Set X | S ⊆ V} := by

```

```

refine <?upper, ?inacc>
* intro A B hAB hA
  exact hA.trans hAB
* intro ? _hne hdir hmem
  have hSUnion : S ⊆ ?_0 ? := by
    simpa [sSup_eq_sUnion] using hmem
  refine Set.Finite.induction_on
    (motive := fun S' _ => S' ⊆ ?_0 ? -> exists U in ?, S' ⊆ U) S hS ?
  empty ?insert
    hSUnion
* intro _
  obtain <U, hU> := _hne
  exact <U, hU, empty_subset U>
* intro a s _ha _hs ih hsT
  have hs_sub : s ⊆ ?_0 ? := (subset_insert a s).trans hsT
  obtain <U, hU, hUs> := ih hs_sub
  have haU : a in ?_0 ? := hsT (mem_insert a s)
  obtain <V, hV, haV> := mem_sUnion.mp haU
  obtain <W, hW, hUW, hVW> := hdir U hU V hV
  exact <W, hW, insert_subset (hVW haV) (hUs.trans hUW)>

theorem finite_subset_wayBelow_1972 {X : Type*} {S T : Set X}
  (hS : S.Finite) (hST : S ⊆ T) :
  Scott1972.ContinuousLattice.WayBelow S T :=
  <{V | S ⊆ V}, scottOpen_supseteq hS, hST, fun _ hV => hV>

/-- `?(X)` is a continuous lattice in the Scott 1972 sense used by
`scottExtend`. -/
theorem isContinuousLattice_set_1972 (X : Type*) :
  Scott1972.ContinuousLattice.IsContinuousLattice (Set X) := by
  intro T
  constructor
* intro S hS
  exact Scott1972.ContinuousLattice.WayBelow.le hS
* intro b hb x hx
  have hsing : ({x} : Set X) ⊆ b :=
    hb (finite_subset_wayBelow_1972 (finite_singleton x)
      (singleton_subset_iff.mpr hx))
  exact hsing (mem_singleton x)

/-- Lemma 35(ii) at paper type: the discrete numeral subspace map extends
along Scott 1972 injectivity (`scottExtend`), then `d_g = lam g`. -/
theorem lemma_35_ii_of {D : Type u} [CompleteLattice D] (R : ReflexiveDcpo D)
  (hbool : interpClosed R churchTrueN != interpClosed R churchFalseN)
  (hcont : Scott1972.ContinuousLattice.IsContinuousLattice D) (S : Set Nat) :
  exists d : D, forall n,
    R.app d (interpClosed R (churchNumN n)) =
    chiNum (churchWithNumerals R hbool) S n := by
  let : TopologicalSpace D := Scott1972.ContinuousLattice.scottTopologicalSpace
  let RN := churchWithNumerals R hbool
  let N := (range RN.numeral)
  let e : N -> D := Subtype.val
  have he : IsEmbedding e := IsEmbedding.subtypeVal
  let g : N -> D := churchNumeralChi R hbool S
  have hg : @Continuous N D _ Scott1972.ContinuousLattice.scottTopologicalSpace g := by
    rw [continuous_def]
  intro U _hU
  have hcov : g ^-1' U = ? x in g ^-1' U, ({x} : Set N) := by
    ext y
    constructor
  * intro hy
    exact mem_iUnion.mpr <y, mem_iUnion.mpr <hy, mem_singleton y>>
  * intro hy

```



```

    obtain <x, hx> := mem_iUnion.mp hy
    obtain <hxU, hyx> := mem_iUnion.mp hx
    rw [mem_singleton_iff] at hyx
    subst hyx
    exact hxU
  rw [hcov]
  exact isOpen_biUnion fun x _ =>
    churchNumeral_subspace_singleton_open R hbool x
let gbarD : D -> D := Scott1972.ContinuousLattice.scottExtend e g
have hgbar_top :
  @Continuous D D Scott1972.ContinuousLattice.scottTopologicalSpace
  Scott1972.ContinuousLattice.scottTopologicalSpace gbarD :=
  Scott1972.ContinuousLattice.scottExtend_continuous hcont e g
have hgbar_sc := isScottContinuous_of_continuous hgbar_top
refine <RN.lam gbarD, fun n => ?_>
have hgS : forall k, gbarD (RN.numeral k) = chiNum RN S k := by
  intro k
  have hpt := Scott1972.ContinuousLattice.scottExtend_eq_of_continuous
    hcont e he g hg (<RN.numeral k, <k, rfl>> : N)
  change Scott1972.ContinuousLattice.scottExtend e g (RN.numeral k) =
    chiNum RN S k
  have heq : e <RN.numeral k, <k, rfl>> = RN.numeral k := rfl
  rw [ <- heq, hpt]
  exact churchNumeralChi_numeral R hbool S k
exact lemma_35_ii_of_extension RN S gbarD hgbar_sc hgS n

/-- Lemma 35 at paper type on an arbitrary reflexive continuous lattice
whose distinguished elements are Church interpretations. -/
theorem lemma_35_of {D : Type u} [CompleteLattice D] (R : ReflexiveDcpo D)
  (hbool : interpClosed R churchTrueN != interpClosed R churchFalseN)
  (hcont : Scott1972.ContinuousLattice.IsContinuousLattice D) :
  (exists U V : Set D, ScottOpen U /\ ScottOpen V /\
    (churchWithNumerals R hbool).boolTop in U /\
    (churchWithNumerals R hbool).boolBot notin U /\
    (churchWithNumerals R hbool).boolBot in V /\
    (churchWithNumerals R hbool).boolTop notin V) /\
  (forall m : Nat, exists W : Set D, ScottOpen W /\
    (churchWithNumerals R hbool).numeral m in W /\
    forall n, n != m -> (churchWithNumerals R hbool).numeral n notin W) /\
  Function.Injective (fun n => interpClosed R (churchNumN n)) /\
  forall S : Set Nat, exists d : D, forall n,
    R.app d (interpClosed R (churchNumN n)) =
    chiNum (churchWithNumerals R hbool) S n :=
  <(lemma_35_i_of R hbool).1, (lemma_35_i_of R hbool).2.1,
    (lemma_35_i_of R hbool).2.2, fun S => lemma_35_ii_of R hbool hcont S>

/-- Engeler `hbool` after Church `Fin 2`/`Nat` agreement. -/
theorem engeler_churchTrueN_ne_churchFalseN :
  interpClosed engelerWithNumerals.toReflexiveDcpo churchTrueN !=
  interpClosed engelerWithNumerals.toReflexiveDcpo churchFalseN := by
  rw [ <- churchTrue_interpClosed_eq_churchTrueN (D := Set Nat),
    <- churchFalse_interpClosed_eq_churchFalseN (D := Set Nat)]
  exact churchTrue_interp_ne_churchFalse engelerPair engelerPair_injective

theorem churchWithNumerals_engeler_boolTop :
  (churchWithNumerals (D := Set Nat) engelerWithNumerals.toReflexiveDcpo
    engeler_churchTrueN_ne_churchFalseN).boolTop =
  engelerWithNumerals.boolTop :=
  (churchTrue_interpClosed_eq_churchTrueN (D := Set Nat)
    engelerWithNumerals.toReflexiveDcpo).symm

theorem churchWithNumerals_engeler_boolBot :
  (churchWithNumerals (D := Set Nat) engelerWithNumerals.toReflexiveDcpo

```

```

    engeler_churchTrueN_ne_churchFalseN).boolBot =
    engelerWithNumerals.boolBot :=
    (churchFalse_interpClosed_eq_churchFalseN (D := Set Nat)
    engelerWithNumerals.toReflexiveDcpo).symm

theorem churchWithNumerals_engeler_numeral (n : Nat) :
  (churchWithNumerals (D := Set Nat) engelerWithNumerals.toReflexiveDcpo
    engeler_churchTrueN_ne_churchFalseN).numeral n =
    engelerWithNumerals.numeral n :=
  (churchNum_interpClosed_eq_churchNumN (D := Set Nat)
    engelerWithNumerals.toReflexiveDcpo n).symm

/-- Engeler `lemma_35_i` follows from `lemma_35_i_of` after Church agreement.
The original Engeler proof of `lemma_35_i` is unchanged. -/
theorem lemma_35_i_via_general :
  (exists U V : Set (Set Nat), ScottOpen U /\ ScottOpen V /\
    engelerWithNumerals.boolTop in U /\ engelerWithNumerals.boolBot notin U /\
    engelerWithNumerals.boolBot in V /\ engelerWithNumerals.boolTop notin V) /\
  (forall m : Nat, exists W : Set (Set Nat), ScottOpen W /\
    engelerWithNumerals.numeral m in W /\
    forall n, n != m -> engelerWithNumerals.numeral n notin W) /\
  Function.Injective engelerWithNumerals.numeral := by
have h := lemma_35_i_of engelerWithNumerals.toReflexiveDcpo
  engeler_churchTrueN_ne_churchFalseN
rw [churchWithNumerals_engeler_boolTop, churchWithNumerals_engeler_boolBot] at h
refine <h.1, ?_, ?_>
* intro m
  obtain <W, hW, hmW, hsep> := h.2.1 m
  refine <W, hW, ?_, ?_>
  * rwa [← churchWithNumerals_engeler_numeral m]
  * intro n hnm hn
    exact hsep n hnm (churchWithNumerals_engeler_numeral n |> hn)
* intro m n hmn
  rw [← churchWithNumerals_engeler_numeral m,
    ← churchWithNumerals_engeler_numeral n] at hmn
  exact h.2.2 hmn

/-- Engeler `lemma_35_ii` follows from `lemma_35_ii_of`. The original
`gbar` proof of `lemma_35_ii` is unchanged. -/
theorem lemma_35_ii_via_general (S : Set Nat) :
  exists d : Set Nat, forall n,
    engelerWithNumerals.app d (engelerWithNumerals.numeral n) =
    chiNum engelerWithNumerals S n := by
have hcont : Scott1972.ContinuousLattice.IsContinuousLattice (Set Nat) :=
  isContinuousLattice_set_1972 Nat
obtain <d, hd> :=
  lemma_35_ii_of engelerWithNumerals.toReflexiveDcpo
    engeler_churchTrueN_ne_churchFalseN hcont S
refine <d, fun n => ?_>
have hchi : chiNum (churchWithNumerals engelerWithNumerals.toReflexiveDcpo
  engeler_churchTrueN_ne_churchFalseN) S n =
  chiNum engelerWithNumerals S n := by
  simp [chiNum, churchWithNumerals_engeler_boolTop,
    churchWithNumerals_engeler_boolBot]
rw [← hchi, ← churchWithNumerals_engeler_numeral n]
exact hd n

/-- Engeler `lemma_35` follows from `lemma_35_of`. The original Engeler
proof is unchanged. -/
theorem lemma_35_via_general :
  (exists U V : Set (Set Nat), ScottOpen U /\ ScottOpen V /\
    engelerWithNumerals.boolTop in U /\ engelerWithNumerals.boolBot notin U /\
    engelerWithNumerals.boolBot in V /\ engelerWithNumerals.boolTop notin V) /\

```

```

    (forall m : Nat, exists W : Set (Set Nat), ScottOpen W /\
      engelerWithNumerals.numeral m in W /\
      forall n, n != m -> engelerWithNumerals.numeral n notin W) /\
    Function.Injective engelerWithNumerals.numeral /\
    forall S : Set Nat, exists d : Set Nat, forall n,
      engelerWithNumerals.app d (engelerWithNumerals.numeral n) =
        chiNum engelerWithNumerals S n :=
<lemma_35_i_via_general.1, lemma_35_i_via_general.2.1,
  lemma_35_i_via_general.2.2, lemma_35_ii_via_general>

end

end Scott2026

```

A.36 Scott2026/Prop36.lean

541 lines.

Lean 4 source (lines 1–400)

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/

import Mathlib.Data.Fintype.EquivFin
import Mathlib.Data.Nat.Pairing
import Scott2026.Interp
import Scott2026.Lemma35General

-- `Lemma35General` pulls in Scott 1972 `specializationPreorder`, which
-- diamonds with `ENNReal`'s order in `Coin`. Keep the lattice/order
-- instances of later modules (measure theory) as Mathlib's.
attribute [-instance] Scott1972.ContinuousLattice.specializationPreorder

/-!
# Proposition 36: many-one comparison via a numeral-to-numeral combinator

Furber-Mardare-Panangaden-Scott, CSL 2026, Proposition 36.
`proposition_36_of` is the paper type on an arbitrary reflexive
continuous lattice with Church numerals (`churchWithNumerals`).
Engeler `proposition_36` remains the special case, also recovered as
`proposition_36_via_general`.

Paper (i) and (ii) are equivalent: a closed `M` that sends Church
numerals to Church numerals (`MapsNumerals`) reduces `S_1` to `S_2` at
some pair of `chi`-oracles iff it does so at every such pair.

`ManyOneLe` remains the algebraic predicate (any `f : Nat -> Nat`, no
fun -term). Paper (i) implies `ManyOneLe`; the converse would require a
closed fun -term for `f`, which is false for a general `f`
(`exists_nat_fun_not_lambda_definable`).
-/

open Set Function Classical

namespace Scott2026

noncomputable section

/-!
## Numeral-to-numeral combinators

```

```

Church `Fin 2`/`Nat` closed-interpretation agreement lives in
`Lemma35General` (`churchNum_interpClosed_eq_churchNumN`).
-/

/-- Closed `M` sending each Church numeral to a Church numeral. -/
def MapsNumerals (M : Lam Nat) : Prop :=
  M.fv = {} /\ forall n, exists m, LamEq (M.app (churchNumN n)) (churchNumN m)

theorem churchSucc_mapsNumerals : MapsNumerals churchSucc :=
  <churchSucc_fv, fun n => <n + 1, churchSucc_num n>>

theorem churchPred_mapsNumerals : MapsNumerals churchPred :=
  <churchPred_fv, fun n =>
    match n with
    | 0 => <0, churchPred_zero>
    | n + 1 => <n, churchPred_succ n>>

/-- `fun | - c_n = c_m` implies `n = m`, via soundness, Fin2/Nat alignment, and
`numeral_inj` (`churchNum_interp_injective`). -/
theorem churchNumN_lamEq_injective {n m : Nat}
  (h : LamEq (churchNumN n) (churchNumN m)) : n = m := by
  have himg :
    interpClosed engelerWithNumerals.toReflexiveDcpo (churchNumN n) =
      interpClosed engelerWithNumerals.toReflexiveDcpo (churchNumN m) :=
    interpClosed_sound_full engelerWithNumerals.toReflexiveDcpo h
  have hnum : engelerWithNumerals.numeral n = engelerWithNumerals.numeral m := by
    rw [numeral_eq_interpClosed_churchNumN, numeral_eq_interpClosed_churchNumN, himg]
  exact engelerWithNumerals.numeral_inj hnum

/-- Domain-general injectivity of Church numerals under `LamEq`, via
`m?` (`numeral_inj_of_churchTest`). -/
theorem churchNumN_lamEq_injective_of {D : Type*} [CompleteLattice D]
  (R : ReflexiveDcpo D)
  (hbool : interpClosed R churchTrueN != interpClosed R churchFalseN)
  {n m : Nat} (h : LamEq (churchNumN n) (churchNumN m)) : n = m :=
  numeral_inj_of_churchTest R hbool (interpClosed_sound_full R h)

theorem mapsNumerals_unique {M : Lam Nat} (hM : MapsNumerals M) {n m m' : Nat}
  (hm : LamEq (M.app (churchNumN n)) (churchNumN m))
  (hm' : LamEq (M.app (churchNumN n)) (churchNumN m')) : m = m' :=
  churchNumN_lamEq_injective (hm.symm.trans hm')

/-- Classically extracted reduction `f` of a `MapsNumerals` witness. -/
def mapsNumeralsFun (M : Lam Nat) (hM : MapsNumerals M) : Nat -> Nat :=
  fun n => Classical.choose (hM.2 n)

theorem mapsNumeralsFun_spec (M : Lam Nat) (hM : MapsNumerals M) (n : Nat) :
  LamEq (M.app (churchNumN n)) (churchNumN (mapsNumeralsFun M hM n)) :=
  Classical.choose_spec (hM.2 n)

theorem mapsNumeralsFun_unique {M : Lam Nat} (hM : MapsNumerals M) {n m : Nat}
  (hm : LamEq (M.app (churchNumN n)) (churchNumN m)) :
  mapsNumeralsFun M hM n = m :=
  mapsNumerals_unique hM (mapsNumeralsFun_spec M hM n) hm

theorem mapsNumerals_interp_numeral {M : Lam Nat} (hM : MapsNumerals M) (n : Nat) :
  interpClosed engelerWithNumerals.toReflexiveDcpo (M.app (churchNumN n)) =
  engelerWithNumerals.numeral (mapsNumeralsFun M hM n) := by
  rw [interpClosed_sound_full engelerWithNumerals.toReflexiveDcpo
    (mapsNumeralsFun_spec M hM n), numeral_eq_interpClosed_churchNumN]

theorem mapsNumerals_interp_numeral_of {D : Type*} [CompleteLattice D]

```

```

(R : ReflexiveDcpo D) {M : Lam Nat} (hM : MapsNumerals M) (n : Nat) :
  interpClosed R (M.app (churchNumN n)) =
    interpClosed R (churchNumN (mapsNumeralsFun M hM n)) :=
  interpClosed_sound_full R (mapsNumeralsFun_spec M hM n)

/-!
## Oracles (reuse Lemma 35(ii) on Engeler)

`Interp.gbar` / `numeralFingerprint` / `lemma_35_ii` supply a
Scott-continuous extension of `chi_S`. Do not redeclare `gbar`.
-/

/-- Oracle for `S` : `lam` of the Scott-continuous extension `gbar S`. -/
noncomputable def chiOracle (S : Set Nat) : Set Nat :=
  engelerWithNumerals.lam (gbar S)

theorem chiOracle_spec (S : Set Nat) (n : Nat) :
  engelerWithNumerals.app (chiOracle S) (engelerWithNumerals.numeral n) =
    chiNum engelerWithNumerals S n :=
  lemma_35_ii_of_extension engelerWithNumerals S (gbar S)
  (gbar_scottContinuous S) (gbar_numeral S) n

/-!
## Characteristic values
-/

theorem chiNum_eq_iff {D : Type*} [CompleteLattice D]
  (R : ReflexiveDcpoWithNumerals D) (S T : Set Nat) (n m : Nat) :
  chiNum R S n = chiNum R T m <-> (n in S <-> m in T) := by
  simp only [chiNum]
  by_cases hn : n in S
  * by_cases hm : m in T
    * simp [hn, hm]
    * rw [if_pos hn, if_neg hm]
      exact iff_of_false R.bool_ne.symm (fun hiff => hm (hiff.mp hn))
  * by_cases hm : m in T
    * rw [if_neg hn, if_pos hm]
      exact iff_of_false R.bool_ne (fun hiff => hn (hiff.mpr hm))
    * simp [hn, hm]

/-!
## Proposition 36 (paper type on `engelerWithNumerals`)
-/

/-- An oracle for `S` represents `chi_S` on numerals. -/
def IsOracle {D : Type*} [CompleteLattice D]
  (R : ReflexiveDcpoWithNumerals D) (d : D) (S : Set Nat) : Prop :=
  forall n, R.app d (R.numeral n) = chiNum R S n

theorem chiOracle_isOracle (S : Set Nat) :
  IsOracle engelerWithNumerals (chiOracle S) S :=
  chiOracle_spec S

/-- Proposition 36(i): some closed numeral-to-numeral `M` and some oracles. -/
def proposition_36_i (S_1 S_2 : Set Nat) : Prop :=
  exists M : Lam Nat, MapsNumerals M /\
  exists d_1 d_2 : Set Nat,
    IsOracle engelerWithNumerals d_1 S_1 /\
    IsOracle engelerWithNumerals d_2 S_2 /\
    forall n, engelerWithNumerals.app d_2
      (interpClosed engelerWithNumerals.toReflexiveDcpo (M.app (churchNumN n))) =
        engelerWithNumerals.app d_1 (engelerWithNumerals.numeral n)

```

```

/-- Proposition 36(ii): some closed numeral-to-numeral `M`, for every oracle pair. -/
def proposition_36_ii (S_1 S_2 : Set Nat) : Prop :=
  exists M : Lam Nat, MapsNumerals M /\
    forall d_1 d_2 : Set Nat,
      IsOracle engelerWithNumerals d_1 S_1 ->
      IsOracle engelerWithNumerals d_2 S_2 ->
      forall n, engelerWithNumerals.app d_2
        (interpClosed engelerWithNumerals.toReflexiveDcpo (M.app (churchNumN n))) =
        engelerWithNumerals.app d_1 (engelerWithNumerals.numeral n)

theorem proposition_36_ii_of_i {S_1 S_2 : Set Nat} (h : proposition_36_i S_1 S_2) :
  proposition_36_ii S_1 S_2 := by
  obtain <M, hM, d_1, d_2, hd_1, hd_2, hagree> := h
  refine <M, hM, ?_>
  intro e_1 e_2 he_1 he_2 n
  set R := engelerWithNumerals
  set f := mapsNumeralsFun M hM
  have hMn : interpClosed R.toReflexiveDcpo (M.app (churchNumN n)) =
    R.numeral (f n) := mapsNumerals_interp_numeral hM n
  have hchi : chiNum R S_2 (f n) = chiNum R S_1 n := by
    calc
      chiNum R S_2 (f n) = R.app d_2 (R.numeral (f n)) := (hd_2 (f n)).symm
      _ = R.app d_2 (interpClosed R.toReflexiveDcpo (M.app (churchNumN n))) := by
        rw [hMn]
      _ = R.app d_1 (R.numeral n) := hagree n
      _ = chiNum R S_1 n := hd_1 n
  calc
    R.app e_2 (interpClosed R.toReflexiveDcpo (M.app (churchNumN n)))
      = R.app e_2 (R.numeral (f n)) := by rw [hMn]
    _ = chiNum R S_2 (f n) := he_2 (f n)
    _ = chiNum R S_1 n := hchi
    _ = R.app e_1 (R.numeral n) := (he_1 n).symm

theorem proposition_36_i_of_ii {S_1 S_2 : Set Nat} (h : proposition_36_ii S_1 S_2) :
  proposition_36_i S_1 S_2 := by
  obtain <M, hM, hforall> := h
  refine <M, hM, chiOracle S_1, chiOracle S_2, chiOracle_isOracle S_1,
    chiOracle_isOracle S_2, ?_>
  exact hforall (chiOracle S_1) (chiOracle S_2)
    (chiOracle_isOracle S_1) (chiOracle_isOracle S_2)

/-- Proposition 36: paper (i) <-> (ii) on `engelerWithNumerals`. -/
theorem proposition_36 (S_1 S_2 : Set Nat) :
  proposition_36_i S_1 S_2 <-> proposition_36_ii S_1 S_2 :=
  <proposition_36_ii_of_i, proposition_36_i_of_ii>

/-!
## Proposition 36 at paper type (`churchWithNumerals`)
-/

/-- Proposition 36(i) on an arbitrary reflexive dcpo with Church numerals. -/
def proposition_36_i_of {D : Type*} [CompleteLattice D] (R : ReflexiveDcpo D)
  (hbool : interpClosed R churchTrueN != interpClosed R churchFalseN)
  (S_1 S_2 : Set Nat) : Prop :=
  exists M : Lam Nat, MapsNumerals M /\
    exists d_1 d_2 : D,
      IsOracle (churchWithNumerals R hbool) d_1 S_1 /\
      IsOracle (churchWithNumerals R hbool) d_2 S_2 /\
      forall n, R.app d_2 (interpClosed R (M.app (churchNumN n))) =
        R.app d_1 (interpClosed R (churchNumN n))

/-- Proposition 36(ii) on an arbitrary reflexive dcpo with Church numerals. -/
def proposition_36_ii_of {D : Type*} [CompleteLattice D] (R : ReflexiveDcpo D)

```

```

(hbool : interpClosed R churchTrueN != interpClosed R churchFalseN)
(S_1 S_2 : Set Nat) : Prop :=
exists M : Lam Nat, MapsNumerals M /\
forall d_1 d_2 : D,
  IsOracle (churchWithNumerals R hbool) d_1 S_1 ->
  IsOracle (churchWithNumerals R hbool) d_2 S_2 ->
  forall n, R.app d_2 (interpClosed R (M.app (churchNumN n))) =
    R.app d_1 (interpClosed R (churchNumN n))

/-- Paper (i) -> (ii): agreement at some oracles plus numeral-mapping
soundness implies agreement at every oracle pair. No oracle existence. -/
theorem proposition_36_ii_of_i_of {D : Type*} [CompleteLattice D]
(R : ReflexiveDcpo D)
(hbool : interpClosed R churchTrueN != interpClosed R churchFalseN)
{S_1 S_2 : Set Nat} (h : proposition_36_i_of R hbool S_1 S_2) :
proposition_36_ii_of R hbool S_1 S_2 := by
obtain <M, hM, d_1, d_2, hd_1, hd_2, hagree> := h
refine <M, hM, ?_>
intro e_1 e_2 he_1 he_2 n
set RN := churchWithNumerals R hbool
set f := mapsNumeralsFun M hM
have hMn : interpClosed R (M.app (churchNumN n)) =
  interpClosed R (churchNumN (f n)) := mapsNumerals_interp_numeral_of R hM n
have hchi : chiNum RN S_2 (f n) = chiNum RN S_1 n := by
calc
  chiNum RN S_2 (f n) = RN.app d_2 (RN.numeral (f n)) := (hd_2 (f n)).symm
  _ = R.app d_2 (interpClosed R (churchNumN (f n))) := rfl
  _ = R.app d_2 (interpClosed R (M.app (churchNumN n))) := by rw [hMn]
  _ = R.app d_1 (interpClosed R (churchNumN n)) := hagree n
  _ = RN.app d_1 (RN.numeral n) := rfl
  _ = chiNum RN S_1 n := hd_1 n
calc
  R.app e_2 (interpClosed R (M.app (churchNumN n)))
    = R.app e_2 (interpClosed R (churchNumN (f n))) := by rw [hMn]
  _ = RN.app e_2 (RN.numeral (f n)) := rfl
  _ = chiNum RN S_2 (f n) := he_2 (f n)
  _ = chiNum RN S_1 n := hchi
  _ = RN.app e_1 (RN.numeral n) := (he_1 n).symm

/-- Paper (ii) -> (i): Lemma 35(ii) supplies oracles on a continuous lattice. -/
theorem proposition_36_i_of_ii_of {D : Type*} [CompleteLattice D]
(R : ReflexiveDcpo D)
(hbool : interpClosed R churchTrueN != interpClosed R churchFalseN)
(hcont : Scott1972.ContinuousLattice.IsContinuousLattice D)
{S_1 S_2 : Set Nat} (h : proposition_36_ii_of R hbool S_1 S_2) :
proposition_36_i_of R hbool S_1 S_2 := by
obtain <M, hM, hforall> := h
obtain <d_1, hd_1> := lemma_35_ii_of R hbool hcont S_1
obtain <d_2, hd_2> := lemma_35_ii_of R hbool hcont S_2
refine <M, hM, d_1, d_2, hd_1, hd_2, ?_>
exact hforall d_1 d_2 hd_1 hd_2

/-- Proposition 36 at paper type: (i) <-> (ii) on a reflexive continuous
lattice with Church numerals. Oracle existence (ii) -> (i) uses
`lemma_35_ii_of`. -/
theorem proposition_36_of {D : Type*} [CompleteLattice D] (R : ReflexiveDcpo D)
(hbool : interpClosed R churchTrueN != interpClosed R churchFalseN)
(hcont : Scott1972.ContinuousLattice.IsContinuousLattice D)
(S_1 S_2 : Set Nat) :
proposition_36_i_of R hbool S_1 S_2 <-> proposition_36_ii_of R hbool S_1 S_2 :=
<proposition_36_ii_of_i_of R hbool,
  proposition_36_i_of_ii_of R hbool hcont>

```

```

theorem chiNum_churchWithNumerals_engeler (S : Set Nat) (n : Nat) :
  chiNum (churchWithNumerals engelerWithNumerals.toReflexiveDcpo
    engeler_churchTrueN_ne_churchFalseN) S n =
  chiNum engelerWithNumerals S n := by
  simp [chiNum, churchWithNumerals_engeler_boolTop,
    churchWithNumerals_engeler_boolBot]

theorem isOracle_churchWithNumerals_engeler (d : Set Nat) (S : Set Nat) :
  IsOracle (churchWithNumerals engelerWithNumerals.toReflexiveDcpo
    engeler_churchTrueN_ne_churchFalseN) d S <=>
  IsOracle engelerWithNumerals d S := by
  constructor
  * intro hd n
  rw [ <- churchWithNumerals_engeler_numeral n, <- chiNum_churchWithNumerals_engeler]
  exact hd n
  * intro hd n
  rw [churchWithNumerals_engeler_numeral n, chiNum_churchWithNumerals_engeler]
  exact hd n

theorem proposition_36_i_iff_of (S_1 S_2 : Set Nat) :
  proposition_36_i_of engelerWithNumerals.toReflexiveDcpo
    engeler_churchTrueN_ne_churchFalseN S_1 S_2 <=>
  proposition_36_i S_1 S_2 := by
  constructor
  * intro <M, hM, d_1, d_2, hd_1, hd_2, hagree>
  refine <M, hM, d_1, d_2, (isOracle_churchWithNumerals_engeler d_1 S_1).mpr hd_1,
    (isOracle_churchWithNumerals_engeler d_2 S_2).mpr hd_2, ?_>
  intro n
  rw [numeral_eq_interpClosed_churchNumN n]
  exact hagree n
  * intro <M, hM, d_1, d_2, hd_1, hd_2, hagree>
  refine <M, hM, d_1, d_2, (isOracle_churchWithNumerals_engeler d_1 S_1).mpr hd_1,
    (isOracle_churchWithNumerals_engeler d_2 S_2).mpr hd_2, ?_>
  intro n
  rw [ <- numeral_eq_interpClosed_churchNumN n]
  exact hagree n

theorem proposition_36_ii_iff_of (S_1 S_2 : Set Nat) :
  proposition_36_ii_of engelerWithNumerals.toReflexiveDcpo
    engeler_churchTrueN_ne_churchFalseN S_1 S_2 <=>
  proposition_36_ii S_1 S_2 := by
  constructor
  * intro <M, hM, hforall>
  refine <M, hM, ?_>
  intro d_1 d_2 hd_1 hd_2 n
  have hd_1' := (isOracle_churchWithNumerals_engeler d_1 S_1).mpr hd_1
  have hd_2' := (isOracle_churchWithNumerals_engeler d_2 S_2).mpr hd_2
  rw [numeral_eq_interpClosed_churchNumN n]
  exact hforall d_1 d_2 hd_1' hd_2' n
  * intro <M, hM, hforall>
  refine <M, hM, ?_>
  intro d_1 d_2 hd_1 hd_2 n
  have hd_1' := (isOracle_churchWithNumerals_engeler d_1 S_1).mpr hd_1
  have hd_2' := (isOracle_churchWithNumerals_engeler d_2 S_2).mpr hd_2
  rw [ <- numeral_eq_interpClosed_churchNumN n]
  exact hforall d_1 d_2 hd_1' hd_2' n

/-- Engeler `proposition_36` follows from `proposition_36_of` after
Church `Fin 2`/`Nat` agreement. The original Engeler proof is unchanged. -/
theorem proposition_36_via_general (S_1 S_2 : Set Nat) :
  proposition_36_i S_1 S_2 <=> proposition_36_ii S_1 S_2 := by
  have hcont : Scott1972.ContinuousLattice.IsContinuousLattice (Set Nat) :=
    isContinuousLattice_set_1972 Nat

```



```

rw [ <- proposition_36_i_iff_of, <- proposition_36_ii_iff_of]
exact proposition_36_of engelerWithNumerals.toReflexiveDcpo
  engeler_churchTrueN_ne_churchFalseN hcont S_1 S_2

/-!
## Relation to the algebraic predicate `ManyOneLe`
-/

theorem manyOneLe_of_proposition_36_i {S_1 S_2 : Set Nat}
  (h : proposition_36_i S_1 S_2) :
  ManyOneLe engelerWithNumerals S_1 S_2 := by
  obtain <M, hM, d_1, d_2, hd_1, hd_2, hagree> := h
  refine <mapsNumeralsFun M hM, d_1, d_2, hd_1, hd_2, ?_>
  intro n
  have hMn := mapsNumerals_interp_numeral hM n
  rw [ <- hMn]
  exact hagree n

theorem manyOneLe_of_proposition_36_ii {S_1 S_2 : Set Nat}
  (h : proposition_36_ii S_1 S_2) :
  ManyOneLe engelerWithNumerals S_1 S_2 :=
  manyOneLe_of_proposition_36_i (proposition_36_i_of_ii h)

/-- Algebraic many-one comparison: some (not necessarily fun -definable) `f`
with `chi_{S_2}(f n) = chi_{S_1}(n)`. Oracles always exist via `lemma_35_ii`. -/
theorem manyOneLe_iff_chi (S_1 S_2 : Set Nat) :
  ManyOneLe engelerWithNumerals S_1 S_2 <->
  exists f : Nat -> Nat, forall n,
    chiNum engelerWithNumerals S_2 (f n) = chiNum engelerWithNumerals S_1 n := by
  constructor
  * intro <f, d_1, d_2, hd_1, hd_2, hf>
  refine <f, fun n => ?_>
  calc
    chiNum engelerWithNumerals S_2 (f n)
      = engelerWithNumerals.app d_2 (engelerWithNumerals.numeral (f n)) :=
      (hd_2 (f n)).symm
    _ = engelerWithNumerals.app d_1 (engelerWithNumerals.numeral n) := hf n
    _ = chiNum engelerWithNumerals S_1 n := hd_1 n
  * intro <f, hf>
  refine <f, chiOracle S_1, chiOracle S_2, chiOracle_spec S_1, chiOracle_spec S_2, ?_>
  intro n
  calc

```

Lean 4 source (lines 401–541)

```

  engelerWithNumerals.app (chiOracle S_2) (engelerWithNumerals.numeral (f n))
    = chiNum engelerWithNumerals S_2 (f n) := chiOracle_spec S_2 (f n)
  _ = chiNum engelerWithNumerals S_1 n := hf n
  _ = engelerWithNumerals.app (chiOracle S_1) (engelerWithNumerals.numeral n) :=
    (chiOracle_spec S_1 n).symm

theorem manyOneLe_of_proposition_36_i_of {D : Type*} [CompleteLattice D]
  (R : ReflexiveDcpo D)
  (hbool : interpClosed R churchTrueN != interpClosed R churchFalseN)
  {S_1 S_2 : Set Nat} (h : proposition_36_i_of R hbool S_1 S_2) :
  ManyOneLe (churchWithNumerals R hbool) S_1 S_2 := by
  obtain <M, hM, d_1, d_2, hd_1, hd_2, hagree> := h
  refine <mapsNumeralsFun M hM, d_1, d_2, hd_1, hd_2, ?_>
  intro n
  have hMn := mapsNumerals_interp_numeral_of R hM n
  change R.app d_2 (interpClosed R (churchNumN (mapsNumeralsFun M hM n))) =
    R.app d_1 (interpClosed R (churchNumN n))
  rw [ <- hMn]
  exact hagree n

```

```

/-- Algebraic many-one comparison on `churchWithNumerals`. Oracles exist
via `lemma_35_ii_of` (not `chiOracle` / `gbar`). -/
theorem manyOneLe_iff_chi_of {D : Type*} [CompleteLattice D]
  (R : ReflexiveDcpo D)
  (hbool : interpClosed R churchTrueN != interpClosed R churchFalseN)
  (hcont : Scott1972.ContinuousLattice.IsContinuousLattice D)
  (S_1 S_2 : Set Nat) :
  ManyOneLe (churchWithNumerals R hbool) S_1 S_2 <->
    exists f : Nat -> Nat, forall n,
      chiNum (churchWithNumerals R hbool) S_2 (f n) =
        chiNum (churchWithNumerals R hbool) S_1 n := by
set RN := churchWithNumerals R hbool
constructor
* intro <f, d_1, d_2, hd_1, hd_2, hf>
  refine <f, fun n => ?_>
  calc
    chiNum RN S_2 (f n) = RN.app d_2 (RN.numeral (f n)) := (hd_2 (f n)).symm
    _ = RN.app d_1 (RN.numeral n) := hf n
    _ = chiNum RN S_1 n := hd_1 n
* intro <f, hf>
  obtain <d_1, hd_1> := lemma_35_ii_of R hbool hcont S_1
  obtain <d_2, hd_2> := lemma_35_ii_of R hbool hcont S_2
  refine <f, d_1, d_2, hd_1, hd_2, ?_>
  intro n
  calc
    RN.app d_2 (RN.numeral (f n)) = chiNum RN S_2 (f n) := hd_2 (f n)
    _ = chiNum RN S_1 n := hf n
    _ = RN.app d_1 (RN.numeral n) := (hd_1 n).symm

/-!
## Not every `f : Nat -> Nat` is given by a closed fun -term
-/

/-- Injective encoding of `Lam Nat` into `Nat`. -/
def lamEncode : Lam Nat -> Nat
| .var x => Nat.pair 0 x
| .abs x M => Nat.pair 1 (Nat.pair x (lamEncode M))
| .app M N => Nat.pair 2 (Nat.pair (lamEncode M) (lamEncode N))

theorem lamEncode_injective : Function.Injective lamEncode := by
  intro M
  induction M with
  | var x =>
    intro N h
    cases N with
    | var y =>
      exact congrArg Lam.var (Nat.pair_eq_pair.mp h).2
    | abs _ _ =>
      exact absurd (Nat.pair_eq_pair.mp h).1 (by decide)
    | app _ _ =>
      exact absurd (Nat.pair_eq_pair.mp h).1 (by decide)
  | abs x M ih =>
    intro N h
    cases N with
    | var _ =>
      exact absurd (Nat.pair_eq_pair.mp h).1 (by decide)
    | abs y N =>
      have hp : Nat.pair x (lamEncode M) = Nat.pair y (lamEncode N) :=
        (Nat.pair_eq_pair.mp h).2
      have hx : x = y := (Nat.pair_eq_pair.mp hp).1
      have hbody : lamEncode M = lamEncode N := (Nat.pair_eq_pair.mp hp).2
      exact congrArg_2 Lam.abs hx (ih hbody)

```

```

| app _ _ =>
  exact absurd (Nat.pair_eq_pair.mp h).1 (by decide)
| app M_1 M_2 ih_1 ih_2 =>
  intro N h
  cases N with
  | var _ =>
    exact absurd (Nat.pair_eq_pair.mp h).1 (by decide)
  | abs _ _ =>
    exact absurd (Nat.pair_eq_pair.mp h).1 (by decide)
| app N_1 N_2 =>
  have hp : Nat.pair (lamEncode M_1) (lamEncode M_2) =
    Nat.pair (lamEncode N_1) (lamEncode N_2) :=
    (Nat.pair_eq_pair.mp h).2
  have h1 : lamEncode M_1 = lamEncode N_1 := (Nat.pair_eq_pair.mp hp).1
  have h2 : lamEncode M_2 = lamEncode N_2 := (Nat.pair_eq_pair.mp hp).2
  exact congrArg_2 Lam.app (ih_1 h1) (ih_2 h2)

/-- Partial inverse of `lamEncode`. -/
def lamOfCode (n : Nat) : Lam Nat :=
  if h : exists M, lamEncode M = n then Classical.choose h else Lam.var 0

theorem lamOfCode_encode (M : Lam Nat) : lamOfCode (lamEncode M) = M := by
  have h : exists N, lamEncode N = lamEncode M := <M, rfl>
  simp only [lamOfCode, dif_pos h]
  exact lamEncode_injective (Classical.choose_spec h)

/-- A witness `m` for `M c_n = c_m`, or `0` if none exists. -/
def representedAt (M : Lam Nat) (n : Nat) : Nat :=
  if h : exists m, LamEq (M.app (churchNumN n)) (churchNumN m) then
    Classical.choose h else 0

theorem representedAt_eq {M : Lam Nat} {n m : Nat}
  (h : LamEq (M.app (churchNumN n)) (churchNumN m)) :
  representedAt M n = m := by
  have hex : exists k, LamEq (M.app (churchNumN n)) (churchNumN k) := <m, h>
  simp only [representedAt, dif_pos hex]
  exact churchNumN_lamEq_injective ((Classical.choose_spec hex).symm.trans h)

/-- Not every `f : Nat -> Nat` is represented by a closed fun -term. A ?Church
numeral of an arbitrary function? is therefore not a fun -term. -/
theorem exists_nat_fun_not_lambda_definable :
  exists f : Nat -> Nat, forall M : Lam Nat,
    not (M.fv = {} /\ forall n, LamEq (M.app (churchNumN n)) (churchNumN (f n))) := by
  let f : Nat -> Nat := fun n => representedAt (lamOfCode n) n + 1
  refine <f, fun M hM => ?_>
  obtain <_hfv, hrep> := hM
  set n := lamEncode M
  have hMcode : lamOfCode n = M := lamOfCode_encode M
  have hAt : representedAt M n = f n := representedAt_eq (hrep n)
  have hfval : f n = representedAt M n + 1 := by
    change representedAt (lamOfCode n) n + 1 = representedAt M n + 1
    rw [hMcode]
  have : representedAt M n = representedAt M n + 1 :=
    hAt.trans hfval
  exact Nat.succ_ne_self (representedAt M n) this.symm
end

end Scott2026

```

A.37 Scott2026/Random.lean

2874 lines.

Lean 4 source (lines 1–400)

```
/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/

import Mathlib.MeasureTheory.MeasurableSpace.Basic
import Mathlib.MeasureTheory.Measure.MeasureSpace
import Mathlib.MeasureTheory.Measure.Typeclasses.Finite
import Mathlib.Order.Atoms
import Mathlib.Data.Countable.Defs
import Mathlib.Data.Countable.Small
import Mathlib.Logic.Encodable.Basic
import Mathlib.Order.CompleteLattice.Finset
import Mathlib.Order.Hom.Basic
import Scott2026.Setoid
import Scott2026.PowerSet
import Scott2026.Engeler

/#!
# Domain-valued random variables (Definitions 37-41, Propositions 39-40)

`??(X; ?(Y))` is the set of measurable maps  $X \rightarrow \text{Set } Y$ . Quotienting by a
sigma-ideal of negligible sets yields an  $A(X)$ -poset (Lemma 38).  $G_X$  is the
strict  $A(X)$ -poset isomorphism of Proposition 39; application is the
homomorphism of Proposition 40.
-/

open MeasureTheory Set
open scoped ENNReal

namespace Scott2026

variable {X Y : Type*} [MeasurableSpace X]

/-- Positive / Scott subbasic sets  $B_y = \{S \mid y \in S\}$  (paper S5). -/
def posBasic (y : Y) : Set (Set Y) := {S | y ∈ S}

/-- Definition 37: measurable maps into  $\text{Set } Y$  (Borel of the positive topology).
We take measurability of all preimages of  $B_y$ , which generate that sigma-algebra
when  $Y$  is countable. -/
def isLO (a : X → Set Y) : Prop :=
  forall y : Y, MeasurableSet (a ⁻¹' posBasic y)

/-- Definition 37:  $??$ -valued order. -/
def lOLE (a b : X → Set Y) : Set X := {x | a x subseq b x}

/-- Definition 37:  $??$ -valued equality. -/
def lOE (a b : X → Set Y) : Set X := {x | a x = b x}

theorem lOLE_refl (a : X → Set Y) : lOLE a a = Set.univ := by
  ext x; simp [lOLE]

theorem lOLE_trans (a b c : X → Set Y) : lOLE a b ∧ lOLE b c subseq lOLE a c := by
  intro x hx
  simp [lOLE] at hx |·
  exact hx.1.trans hx.2
```

```

theorem l0Eq_eq_le (a b : X → Set Y) : l0Eq a b = l0Le a b ∩ l0Le b a := by
  ext x
  simp [l0Eq, l0Le]
  exact Set.Subset.antisymm_iff

/-- Paper Lemma 38 measurability: the graph of `subseq` is a countable intersection of
`B_y? x univ) ∪ (univ x B_y)` slices. -/
theorem l0Le_eq_iInter (a b : X → Set Y) :
  l0Le a b = ? y : Y, (a ^-1' posBasic y)? ∪ b ^-1' posBasic y := by
  ext x
  constructor
  * intro hx
    refine mem_iInter.mpr fun y => ?_
    simp only [mem_union, mem_compl_iff, mem_preimage, posBasic, mem_setOf, l0Le] at hx |-
    exact or_iff_not_imp_left.mpr fun hy => hx (not_not.mp hy)
  * intro hx y hy
    have hyx := mem_iInter.mpr hx y
    simp only [mem_union, mem_compl_iff, mem_preimage, posBasic, mem_setOf] at hyx
    exact hyx.resolve_left (not_not.mpr hy)

theorem measurableSet_l0Le [Countable Y] {a b : X → Set Y} (ha : IsL0 a) (hb : IsL0 b) :
  MeasurableSet (l0Le a b) := by
  rw [l0Le_eq_iInter]
  exact MeasurableSet.iInter fun y => (ha y).compl.union (hb y)

theorem measurableSet_l0Eq [Countable Y] {a b : X → Set Y} (ha : IsL0 a) (hb : IsL0 b) :
  MeasurableSet (l0Eq a b) := by
  rw [l0Eq_eq_le]
  exact (measurableSet_l0Le ha hb).inter (measurableSet_l0Le hb ha)

/-- Definition 37: the three clauses. -/
theorem definition_37 (a b : X → Set Y) :
  IsL0 a = (forall y : Y, MeasurableSet (a ^-1' posBasic y)) /\
  l0Le a b = {x | a x subseq b x} /\
  l0Eq a b = {x | a x = b x} :=
  <rfl, rfl, rfl>

/-- Lemma 38, unquotiented: `??` is an `A`-poset for `A = Set X`. -/
def l0APoset : APoset (A := Set X) (X → Set Y) where
  le := l0Le
  trans := fun a b c => l0Le_trans a b c
  le_le_refl := fun a b => by
    intro x _hx
    exact <by simp [l0Le], by simp [l0Le]>

/-- A negligibility space (paper S5): a measurable space with a sigma-ideal `N`
such that `Sigma / N` is complete, not merely sigma-complete. Completeness is
packaged as existence of essential suprema. -/
structure NegligibilitySpace (X : Type*) [MeasurableSpace X] where
  negligible : Set X → Prop
  empty : negligible {}
  mono : forall {s t}, s subseq t → negligible t → negligible s
  union : forall s : Nat → Set X, (forall n, negligible (s n)) → negligible (? n, s n)
  essentialSup : forall {? : Type*} (s : ? → Set X),
    exists u : Set X,
      (forall i, negligible (s i \ u)) /\
      (forall v : Set X, (forall i, negligible (s i \ v)) → negligible (u \ v))
  /- Every set is a.e. equal to a measurable representative (`A(X) = Sigma/??`). -/
  measurableRep : forall s : Set X, exists t : Set X, MeasurableSet t /\ negligible (
    symmDiff s t)

namespace NegligibilitySpace

```

```

variable {X : Type*} [MeasurableSpace X] (N : NegligibilitySpace X)

noncomputable def measRep (s : Set X) : Set X :=
  Classical.choose (N.measurableRep s)

theorem measRep_measurable (s : Set X) : MeasurableSet (N.measRep s) :=
  (Classical.choose_spec (N.measurableRep s)).1

theorem measRep_symmDiff (s : Set X) : N.negligible (symmDiff s (N.measRep s)) :=
  (Classical.choose_spec (N.measurableRep s)).2

theorem union_countable {α : Type*} [Countable α] (s : α → Set X)
  (hs : forall i, N.negligible (s i)) : N.negligible (⋃ i, s i) := by
  cases isEmpty_or_nonempty α with
  | inl _ =>
    simp [iUnion_of_empty]; exact N.empty
  | inr hne =>
    obtain <f, hf> := exists_surjective_nat α
    have : α i, s i = α n, s (f n) := by
      ext x
      constructor
    * intro hx
      obtain <i, hi> := mem_iUnion.mp hx
      obtain <n, rfl> := hf i
      exact mem_iUnion.mpr <n, hi>
    * intro hx
      obtain <n, hn> := mem_iUnion.mp hx
      exact mem_iUnion.mpr <f n, hn>
    exact this |> N.union (fun n => s (f n)) (fun n => hs _)

theorem union_2 {s t : Set X} (hs : N.negligible s) (ht : N.negligible t) :
  N.negligible (s ∪ t) := by
  let f : Nat → Set X := fun n => if n = 0 then s else t
  have hf : forall n, N.negligible (f n) := fun n => by
    by_cases hn : n = 0
    * subst hn; exact hs
    * simp [f, hn, ht]
  have hunion := N.union f hf
  have : α n, f n = s ∪ t := by
    ext x
    constructor
  * intro hx
    obtain <n, hx> := mem_iUnion.mp hx
    by_cases hn : n = 0
    * exact Or.inl (by simp [f, hn] using hx)
    * exact Or.inr (by simp [f, hn] using hx)
  * intro hx
    rcases hx with hxs | hxt
    * exact mem_iUnion.mpr <0, by simp [f, hxs]>
    * exact mem_iUnion.mpr <1, by simp [f, hxt]>
  exact this |> hunion

/-!
## Measure algebra (Fremlin 322B/C)

```

A finite measure yields the null sigma-ideal $\mathcal{N} = \{s : s = \emptyset\}$ (outer measure) and the ccc essential-supremum argument on measurable hulls. The paper's $\mathcal{A}(X) = \Sigma / \mathcal{N}$ quotients *measurable* sets (*MeasureAlgebra* below). Mathlib's *toMeasurable* $s = \{s\}$ holds precisely when s is null-measurable (*NullMeasurableSet.toMeasurable_ae_eq*). That is the hypothesis needed to inhabit *measurableRep* on all of *Set X*. Coin space is a probability measure (hence finite); its Borel sigma-algebra still has non-null-measurable sets, so the extra hypothesis is not automatic.

-/

```

theorem ofMeasure_empty (? : Measure X) : ? ({ } : Set X) = 0 :=
  measure_empty

theorem ofMeasure_mono (? : Measure X) {s t : Set X} (h : s ⊆ t) (ht : ? t = 0) :
  ? s = 0 :=
  measure_mono_null h ht

theorem ofMeasure_union (? : Measure X) (s : Nat → Set X) (hs : forall n, ? (s n) = 0) :
  ? (? n, s n) = 0 :=
  measure_iUnion_null hs

theorem ofMeasure_symmDiff_toMeasurable (? : Measure X) (s : Set X) :
  symmDiff s (toMeasurable ? s) = toMeasurable ? s \ s := by
  ext x
  simp only [mem_symmDiff, mem_sdiff]
  have hx : x in s → x in toMeasurable ? s := fun h => subset_toMeasurable ? s h
  tauto

theorem ofMeasure_toMeasurable_ae (? : Measure X) {s : Set X}
  (hs : NullMeasurableSet s) :
  ? (symmDiff s (toMeasurable ? s)) = 0 :=
  (measure_symmDiff_eq_zero_iff (? := ?)).mpr
  (NullMeasurableSet.toMeasurable_ae_eq hs).symm

/-- Flatten a maximizing sequence of countable subfamilies. -/
theorem ofMeasure_exists_max_countable_union (? : Measure X) [IsFiniteMeasure ?]
  {? : Type*} [Nonempty ?] (t : ? → Set X) :
  exists f : Nat → ?, ? (? n, t (f n)) = bigcup g : Nat → ?, ? (? n, t (g n)) := by
  let m : ? ≥ 0 inf := bigcup g : Nat → ?, ? (? n, t (g n))
  have hm_lt : m < inf :=
    (iSup_le fun _ => measure_mono (subset_univ _)).trans_lt (measure_lt_top ? Set.univ)
  have happrox : forall n : Nat, exists g : Nat → ?, m ≤ ? (? k, t (g k)) + (n + 1 : ?
    ≥ 0 inf )-1 := by
    intro n
    by_contra h
    push_neg at h
    have h? : (n + 1 : ? ≥ 0 inf )-1 != inf := by simp
    have hsup : m ≤ m - (n + 1 : ? ≥ 0 inf )-1 :=
      iSup_le fun g =>
        ENNReal.le_sub_of_add_le_left h? (by rw [add_comm]; exact (h g).le)
    have hm0 : m != 0 := fun hm0 => by
      have := h (fun _ => Classical.arbitrary ?)
      rw [hm0] at this
      exact this.not_ge bot_le
    exact (lt_irrefl m)
    ((ENNReal.sub_lt_self hm_lt.ne hm0 (by simp)).trans_le' hsup)
  choose g hg using happrox
  let f : Nat → ? := fun p => g p.unpair.1 p.unpair.2
  have hcontain : forall n, ? k, t (g n k) ⊆ t (f p) := fun n x hx => by
    obtain <k, hk> := mem_iUnion.mp hx
    exact mem_iUnion.mpr <Nat.pair n k, by simp [f] using hk>
  have hge : m ≤ ? (? p, t (f p)) :=
    ENNReal.le_of_forall_pos_le_add fun ? h? _ => by
      obtain <n, hn> := ENNReal.exists_inv_nat_lt (ENNReal.coe_ne_zero.mpr h?.ne')
      cases n with
      | zero => simp at hn
      | succ n =>
        have : (n + 1 : ? ≥ 0 inf )-1 ≤ (? : ? ≥ 0 inf ) := le_of_lt (by simp using hn)
        exact (hg n).trans (add_le_add (measure_mono (hcontain n)) this)
  exact <f, le_antisymm (le_iSup (fun g : Nat → ? => ? (? n, t (g n))) f) hge>

```

```

/-- Essential supremum via hulls and the ccc, once every set is
null-measurable (so each hull remainder is null). -/
theorem ofMeasure_essentialSup (? : Measure X) [IsFiniteMeasure ?]
  (hN : forall s : Set X, NullMeasurableSet s) {? : Type*} (s : ? -> Set X) :
  exists u : Set X,
    (forall i, ? (s i \ u) = 0) /\
      forall v : Set X, (forall i, ? (s i \ v) = 0) -> ? (u \ v) = 0 := by
let t : ? -> Set X := fun i => toMeasurable ? (s i)
have ht : forall i, MeasurableSet (t i) := fun i => measurableSet_toMeasurable ? (s i)
have hst : forall i, s i subseq t i := fun i => subset_toMeasurable ? (s i)
have hrem : forall i, ? (t i \ s i) = 0 := fun i => by
  have := ofMeasure_toMeasurable_ae ? (hN (s i))
  rw [ofMeasure_symmDiff_toMeasurable] at this
  exact this
cases isEmpty_or_nonempty ? with
| inl _ =>
  exact <{}>, fun i => isEmptyElim i, fun _ _ => by simp>
| inr _ =>
  obtain <f, hf> := ofMeasure_exists_max_countable_union ? t
  let u : Set X := ? n, t (f n)
  have hu : MeasurableSet u := MeasurableSet.iUnion fun n => ht (f n)
  refine <u, ?upper, ?least>
  * intro i
    by_contra hpos
    have hsi : ? (s i \ u) != 0 := hpos
    have hti : ? (t i \ u) != 0 := fun h =>
      hsi (measure_mono_null (sdiff_subset_sdiff (hst i) Subset.rfl) h)
    have hdisj : Disjoint u (t i \ u) := disjoint_sdiff_right
    have hunion_eq : u ∪ t i = u ∪ (t i \ u) :=
      (union_sdiff_self (s := u) (t := t i)).symm
    have hadd : ? (u ∪ t i) = ? u + ? (t i \ u) := by
      rw [hunion_eq]
      exact measure_union hdisj ((ht i).diff hu)
    have hinc : ? u < ? (u ∪ t i) := by
      rw [hadd]
      exact ENNReal.lt_add_right (measure_ne_top ? u) hti
    let f' : Nat -> ? := fun n => if n = 0 then i else f n.pred
    have hf' : u ∪ t i = ? n, t (f' n) := by
      ext x
      constructor
    * intro hx
      rcases hx with h | h
      * obtain <n, hn> := mem_iUnion.mp h
        exact mem_iUnion.mpr <n + 1, by simp [f', hn]>
      * exact mem_iUnion.mpr <0, by simp [f', h]>
    * intro hx
      obtain <n, hn> := mem_iUnion.mp hx
      by_cases hn0 : n = 0
      * exact Or.inr (by simp [f', hn0] using hn)
      * refine Or.inl (mem_iUnion.mpr <n.pred, ?_>)
        simp [f', hn0, Nat.succ_pred_eq_of_ne_zero hn0] using hn
    have hle : ? (u ∪ t i) <= ? u := by
      have heq : ? (u ∪ t i) = ? (? n, t (f' n)) := congrArg ? hf'
      have hmax : ? (? n, t (f' n)) <= bigcup g : Nat -> ?, ? (? n, t (g n)) :=
        le_iSup (fun g : Nat -> ? => ? (? n, t (g n))) f'
      calc
        ? (u ∪ t i) = ? (? n, t (f' n)) := heq
        _ <= bigcup g : Nat -> ?, ? (? n, t (g n)) := hmax
        _ = ? u := hf.symm
    exact hle.not_gt hinc
  * intro v hv
    have htn : forall n, ? (t (f n) \ v) = 0 := fun n => by
      have hs0 : ? (s (f n) \ v) = 0 := hv (f n)

```



```

    have hsub : t (f n) \ v subseq (t (f n) \ s (f n)) U (s (f n) \ v) := by
      intro x; simp [mem_union, mem_sdiff]; tauto
    exact measure_mono_null hsub (measure_union_null (hrem (f n)) hs0)
  have heq : u \ v = ? n, t (f n) \ v := by
    ext x; simp [u, mem_sdiff, mem_iUnion]
  exact heq |> measure_iUnion_null htn

/-- Essential supremum for a *measurable* family. Finite-measure ccc;
`toMeasurable` is unnecessary, and there is no `hN`. -/
theorem ofMeasure_essentialSup_measurable (? : Measure X) [IsFiniteMeasure ?]
  {? : Type*} (s : ? -> Set X) (hs : forall i, MeasurableSet (s i)) :
    exists u : Set X,
      MeasurableSet u /\
      (forall i, ? (s i \ u) = 0) /\
      forall v : Set X, (forall i, ? (s i \ v) = 0) -> ? (u \ v) = 0 := by
cases isEmpty_or_nonempty ? with
| inl _ =>
  exact <{}, MeasurableSet.empty, fun i => isEmptyElim i, fun _ _ => by simp>
| inr _ =>
  obtain <f, hf> := ofMeasure_exists_max_countable_union ? s
  let u : Set X := ? n, s (f n)
  have hu : MeasurableSet u := MeasurableSet.iUnion fun n => hs (f n)
  refine <u, hu, ?upper, ?least>
* intro i
  by_contra hpos
  have hsi : ? (s i \ u) != 0 := hpos
  have hdisj : Disjoint u (s i \ u) := disjoint_sdiff_right
  have hunion_eq : u U s i = u U (s i \ u) :=
    (union_sdiff_self (s := u) (t := s i)).symm
  have hadd : ? (u U s i) = ? u + ? (s i \ u) := by
    rw [hunion_eq]
    exact measure_union hdisj ((hs i).diff hu)
  have hinc : ? u < ? (u U s i) := by
    rw [hadd]
    exact ENNReal.lt_add_right (measure_ne_top ? u) hsi
  let f' : Nat -> ? := fun n => if n = 0 then i else f n.pred
  have hf' : u U s i = ? n, s (f' n) := by
    ext x
    constructor
* intro hx
  rcases hx with h | h
  * obtain <n, hn> := mem_iUnion.mp h
    exact mem_iUnion.mpr <n + 1, by simp [f', hn]>
  * exact mem_iUnion.mpr <0, by simp [f', h]>
* intro hx
  obtain <n, hn> := mem_iUnion.mp hx
  by_cases hn0 : n = 0
  * exact Or.inr (by simp [f', hn0] using hn)
  * refine Or.inl (mem_iUnion.mpr <n.pred, ?_>)
    simp [f', hn0, Nat.succ_pred_eq_of_ne_zero hn0] using hn
  have hle : ? (u U s i) <= ? u := by
    have heq : ? (u U s i) = ? (? n, s (f' n)) := congrArg ? hf'
    have hmax : ? (? n, s (f' n)) <= bigcup g : Nat -> ?, ? (? n, s (g n)) :=
      le_iSup (fun g : Nat -> ? => ? (? n, s (g n))) f'
    calc
      ? (u U s i) = ? (? n, s (f' n)) := heq
      _ <= bigcup g : Nat -> ?, ? (? n, s (g n)) := hmax
      _ = ? u := hf'.symm
  exact hle.not_gt hinc
* intro v hv
  have heq : u \ v = ? n, s (f n) \ v := by
    ext x; simp [u, mem_sdiff, mem_iUnion]
  exact heq |> measure_iUnion_null fun n => hv (f n)

```

```

/-- Measure algebra of a finite measure, as a `NegligibilitySpace`.
Requires every set to be null-measurable so that `toMeasurable` is an
a.e. representative (`measurableRep`). Finiteness is the ccc hypothesis
for `essentialSup`. -/
noncomputable def ofMeasure (? : Measure X) [IsFiniteMeasure ?]
  (hN : forall s : Set X, NullMeasurableSet s ?) : NegligibilitySpace X where
  negligible := fun s => ? s = 0
  empty := ofMeasure_empty ?
  mono := fun {s t} => ofMeasure_mono ?
  union := ofMeasure_union ?
  essentialSup := ofMeasure_essentialSup ? hN
  measurableRep := fun s =>
    <toMeasurable ? s, measurableSet_toMeasurable ? s,
    ofMeasure_toMeasurable_ae ? (hN s)>

end NegligibilitySpace

/-! ## Set identities for symmetric difference -/

theorem symmDiff_triangle_subset {a : Type*} (s t u : Set a) :
  symmDiff s u subseteq symmDiff s t U symmDiff t u := by
  intro x
  simp only [mem_union, mem_symmDiff]
  tauto

theorem union_symmDiff_subset {a : Type*} (s t s' t' : Set a) :
  symmDiff (s U t) (s' U t') subseteq symmDiff s s' U symmDiff t t' := by
  intro x
  simp only [mem_union, mem_symmDiff]
  tauto

theorem inter_symmDiff_subset {a : Type*} (s t s' t' : Set a) :
  symmDiff (s I t) (s' I t') subseteq symmDiff s s' U symmDiff t t' := by
  intro x
  simp only [mem_union, mem_inter_iff, mem_symmDiff]
  tauto

theorem sdiff_symmDiff_subset {a : Type*} (s t s' t' : Set a) :
  symmDiff (s \ t) (s' \ t') subseteq symmDiff s s' U symmDiff t t' := by
  intro x
  simp only [mem_union, mem_sdiff, mem_symmDiff]
  tauto

theorem sdiff_subset_symmDiff {a : Type*} (s t : Set a) : s \ t subseteq symmDiff s t :=
  subset_union_left

/-!
## `A(X) = Sigma / ?` as a complete Boolean algebra
-/

def aeEq (N : NegligibilitySpace X) (s t : Set X) : Prop :=
  N.negligible (symmDiff s t)

theorem aeEq_refl (N : NegligibilitySpace X) (s : Set X) : aeEq N s s := by
  simp [aeEq, symmDiff_self] using N.empty

theorem aeEq_symm (N : NegligibilitySpace X) {s t : Set X} (h : aeEq N s t) :
  aeEq N t s := by
  simp [aeEq, symmDiff_comm] using h

```

```

theorem aeEq_trans (N : NegligibilitySpace X) {s t u : Set X}
  (hst : aeEq N s t) (htu : aeEq N t u) : aeEq N s u :=
  N.mono (symmDiff_triangle_subset s t u) (N.union_2 hst htu)

theorem aeEq_iseqv (N : NegligibilitySpace X) : Equivalence (aeEq N) :=
  <aeEq_refl N, fun { _ _ } => aeEq_symm N, fun { _ _ _ } => aeEq_trans N>

def aeSetoid (N : NegligibilitySpace X) : Setoid (Set X) where
  r := aeEq N
  iseqv := aeEq_iseqv N

/-- The complete Boolean algebra associated to a negligibility space. -/
abbrev AssociatedAlgebra (N : NegligibilitySpace X) : Type _ :=
  Quotient (aeSetoid N)

namespace AssociatedAlgebra

variable {X : Type*} [MeasurableSpace X] (N : NegligibilitySpace X)

def mk (s : Set X) : AssociatedAlgebra N :=
  Quotient.mk (aeSetoid N) s

theorem mk_eq_iff {s t : Set X} : mk N s = mk N t <-> aeEq N s t :=
  Quotient.eq

@[simp] theorem mk_out (a : AssociatedAlgebra N) : mk N (Quotient.out a) = a :=
  Quotient.out_eq a

theorem aeEq_out {s : Set X} : aeEq N (Quotient.out (mk N s)) s :=
  (mk_eq_iff N).mp (mk_out N (mk N s))

theorem aeEq_empty_iff {s : Set X} : aeEq N s {} <-> N.negligible s := by
  constructor
  * intro h
    simpa [aeEq, symmDiff_def] using h
  * intro hs
    simpa [aeEq, symmDiff_def] using hs

theorem aeEq_union {s s' t t' : Set X} (hs : aeEq N s s') (ht : aeEq N t t') :
  aeEq N (s U t) (s' U t') :=
  N.mono (union_symmDiff_subset s t s' t') (N.union_2 hs ht)

theorem aeEq_inter {s s' t t' : Set X} (hs : aeEq N s s') (ht : aeEq N t t') :
  aeEq N (s I t) (s' I t') :=
  N.mono (inter_symmDiff_subset s t s' t') (N.union_2 hs ht)

theorem aeEq_compl {s t : Set X} (h : aeEq N s t) : aeEq N s? t? := by
  have : symmDiff s? t? = symmDiff s t := by
    ext x
    simp only [mem_symmDiff, mem_compl_iff]
    tauto
  unfold aeEq at h |-
  rwa [this]

theorem aeEq_sdiff {s s' t t' : Set X} (hs : aeEq N s s') (ht : aeEq N t t') :
  aeEq N (s \ t) (s' \ t') :=
  N.mono (sdiff_symmDiff_subset s t s' t') (N.union_2 hs ht)

noncomputable def inf (a b : AssociatedAlgebra N) : AssociatedAlgebra N :=
  mk N (Quotient.out a I Quotient.out b)

noncomputable def sup (a b : AssociatedAlgebra N) : AssociatedAlgebra N :=
  mk N (Quotient.out a U Quotient.out b)

```

```

noncomputable def compl (a : AssociatedAlgebra N) : AssociatedAlgebra N :=
  mk N (Quotient.out a)?

def top : AssociatedAlgebra N := mk N Set.univ

def bot : AssociatedAlgebra N := mk N {}

theorem mk_union (s t : Set X) : mk N (s ∪ t) = sup N (mk N s) (mk N t) := by
  unfold sup
  exact (mk_eq_iff N).mpr
    (aeEq_union N (aeEq_symm N (aeEq_out N)) (aeEq_symm N (aeEq_out N)))

theorem mk_inter (s t : Set X) : mk N (s ∩ t) = inf N (mk N s) (mk N t) := by
  unfold inf
  exact (mk_eq_iff N).mpr
    (aeEq_inter N (aeEq_symm N (aeEq_out N)) (aeEq_symm N (aeEq_out N)))

theorem mk_compl (s : Set X) : mk N s? = compl N (mk N s) := by
  unfold compl
  exact (mk_eq_iff N).mpr (aeEq_compl N (aeEq_symm N (aeEq_out N)))

/-- Order: `[s] <= [t]` iff `s \ t` is negligible. -/
def Le (a b : AssociatedAlgebra N) : Prop :=
  N.negligible (Quotient.out a \ Quotient.out b)

theorem le_mk {s t : Set X} : Le N (mk N s) (mk N t) <-> N.negligible (s \ t) := by
  have hDelta : aeEq N (Quotient.out (mk N s) \ Quotient.out (mk N t)) (s \ t) :=
    aeEq_sdiff N (aeEq_out N) (aeEq_out N)
  constructor
  * intro h
    change N.negligible (Quotient.out (mk N s) \ Quotient.out (mk N t)) at h
    have hsub : s \ t ⊆ subseq
      (Quotient.out (mk N s) \ Quotient.out (mk N t)) ∪
      symmDiff (Quotient.out (mk N s) \ Quotient.out (mk N t)) (s \ t) := by
      intro x; simp [mem_union, mem_symmDiff, mem_sdiff]; tauto
    exact N.mono hsub (N.union_2 h hDelta)
  * intro h
    change N.negligible (Quotient.out (mk N s) \ Quotient.out (mk N t))
    have hsub : Quotient.out (mk N s) \ Quotient.out (mk N t) ⊆ subseq
      (s \ t) ∪
      symmDiff (Quotient.out (mk N s) \ Quotient.out (mk N t)) (s \ t) := by
      intro x; simp [mem_union, mem_symmDiff, mem_sdiff]; tauto
    exact N.mono hsub (N.union_2 h hDelta)

theorem le_refl (a : AssociatedAlgebra N) : Le N a a := by
  simp [Le] using N.empty

theorem le_trans (a b c : AssociatedAlgebra N)
  (hab : Le N a b) (hbc : Le N b c) : Le N a c := by
  have hsub : Quotient.out a \ Quotient.out c ⊆ subseq
    (Quotient.out a \ Quotient.out b) ∪ (Quotient.out b \ Quotient.out c) := by
    intro x hx
    simp only [mem_union, mem_sdiff] at hx |-
    tauto
  exact N.mono hsub (N.union_2 hab hbc)

theorem le_antisymm (a b : AssociatedAlgebra N)
  (hab : Le N a b) (hba : Le N b a) : a = b := by
  have : aeEq N (Quotient.out a) (Quotient.out b) := by
    simp [aeEq, symmDiff_def] using N.union_2 hab hba
  calc a = mk N (Quotient.out a) := (mk_out N a).symm
    _ = mk N (Quotient.out b) := (mk_eq_iff N).mpr this

```

```

_ = b := mk_out N b

theorem inf_le_left (a b : AssociatedAlgebra N) : Le N (inf N a b) a := by
  rw [show a = mk N (Quotient.out a) from (mk_out N a).symm]
  unfold inf
  refine (le_mk N).mpr ?_
  have : (Quotient.out a I Quotient.out b) \ Quotient.out a = {} := by
    ext x; simp only [mem_empty_iff_false, mem_sdiff, mem_inter_iff]; tauto
  simp [this] using N.empty

theorem inf_le_right (a b : AssociatedAlgebra N) : Le N (inf N a b) b := by
  rw [show b = mk N (Quotient.out b) from (mk_out N b).symm]
  unfold inf
  refine (le_mk N).mpr ?_
  have : (Quotient.out a I Quotient.out b) \ Quotient.out b = {} := by
    ext x; simp only [mem_empty_iff_false, mem_sdiff, mem_inter_iff]; tauto
  simp [this] using N.empty

theorem le_inf (a b c : AssociatedAlgebra N)
  (hab : Le N a b) (hac : Le N a c) : Le N a (inf N b c) := by
  rw [show a = mk N (Quotient.out a) from (mk_out N a).symm]
  unfold inf
  refine (le_mk N).mpr ?_
  have hsub : Quotient.out a \ (Quotient.out b I Quotient.out c) =
    (Quotient.out a \ Quotient.out b) U (Quotient.out a \ Quotient.out c) := by
    ext x; simp; tauto
  exact hsub |> N.union_2 hab hac

theorem le_sup_left (a b : AssociatedAlgebra N) : Le N a (sup N a b) := by
  rw [show a = mk N (Quotient.out a) from (mk_out N a).symm]
  unfold sup
  refine (le_mk N).mpr ?_
  have : Quotient.out a \ (Quotient.out a U Quotient.out b) = {} := by
    ext x; simp only [mem_empty_iff_false, mem_sdiff, mem_union]; tauto
  simp [this] using N.empty

theorem le_sup_right (a b : AssociatedAlgebra N) : Le N b (sup N a b) := by
  rw [show b = mk N (Quotient.out b) from (mk_out N b).symm]
  unfold sup
  refine (le_mk N).mpr ?_
  have : Quotient.out b \ (Quotient.out a U Quotient.out b) = {} := by
    ext x; simp only [mem_empty_iff_false, mem_sdiff, mem_union]; tauto
  simp [this] using N.empty

theorem sup_le (a b c : AssociatedAlgebra N)
  (hac : Le N a c) (hbc : Le N b c) : Le N (sup N a b) c := by
  rw [show c = mk N (Quotient.out c) from (mk_out N c).symm]
  unfold sup
  refine (le_mk N).mpr ?_
  have hsub : (Quotient.out a U Quotient.out b) \ Quotient.out c =
    (Quotient.out a \ Quotient.out c) U (Quotient.out b \ Quotient.out c) := by
    ext x; simp [or_and_right]
  exact hsub |> N.union_2 hac hbc

theorem le_top (a : AssociatedAlgebra N) : Le N a (top N) := by
  rw [show a = mk N (Quotient.out a) from (mk_out N a).symm]
  unfold top
  refine (le_mk N).mpr ?_
  have : Quotient.out a \ Set.univ = {} :=
    diff_eq_empty.mpr (subset_univ _)
  simp [this] using N.empty

theorem bot_le (a : AssociatedAlgebra N) : Le N (bot N) a := by

```

```

rw [show a = mk N (Quotient.out a) from (mk_out N a).symm]
unfold bot
refine (le_mk N).mpr ?_
have : ({ } \ Quotient.out a) = { } := empty_diff _
simp [this] using N.empty

theorem inf_compl_le_bot (a : AssociatedAlgebra N) :
  Le N (inf N a (compl N a)) (bot N) := by
  have hempty : Quotient.out a I (Quotient.out a)? = { } := by
    ext x; simp only [mem_inter_iff, mem_compl_iff]; tauto
  have : inf N a (compl N a) = mk N { } := by
    unfold inf compl
    refine (mk_eq_iff N).mpr ?_
    have hDelta : aeEq N
      (Quotient.out a I Quotient.out (mk N (Quotient.out a)?))
      (Quotient.out a I (Quotient.out a)? ) :=
      aeEq_inter N (aeEq_refl N _) (aeEq_out N)
    simp [hempty] using hDelta
  rw [this, bot]
  exact le_refl N _

theorem top_le_sup_compl (a : AssociatedAlgebra N) :
  Le N (top N) (sup N a (compl N a)) := by
  have huniv : Quotient.out a U (Quotient.out a)? = Set.univ := by
    ext x; simp only [mem_union, mem_compl_iff]; tauto
  have : sup N a (compl N a) = mk N Set.univ := by
    unfold sup compl
    refine (mk_eq_iff N).mpr ?_
    have hDelta : aeEq N
      (Quotient.out a U Quotient.out (mk N (Quotient.out a)?))
      (Quotient.out a U (Quotient.out a)? ) :=
      aeEq_union N (aeEq_refl N _) (aeEq_out N)
    simp [huniv] using hDelta
  rw [this, top]
  exact le_refl N _

theorem le_sup_inf (a b c : AssociatedAlgebra N) :
  Le N (inf N (sup N a b) (sup N a c)) (sup N a (inf N b c)) := by
  have hL : inf N (sup N a b) (sup N a c) =
    mk N ((Quotient.out a U Quotient.out b) I (Quotient.out a U Quotient.out c)) := by
    change mk N (Quotient.out (sup N a b) I Quotient.out (sup N a c)) = _
    exact (mk_eq_iff N).mpr (aeEq_inter N
      (aeEq_out (s := Quotient.out a U Quotient.out b) N)
      (aeEq_out (s := Quotient.out a U Quotient.out c) N))
  have hR : sup N a (inf N b c) =
    mk N (Quotient.out a U (Quotient.out b I Quotient.out c)) := by
    change mk N (Quotient.out a U Quotient.out (inf N b c)) = _
    exact (mk_eq_iff N).mpr (aeEq_union N (aeEq_refl N _)
      (aeEq_out (s := Quotient.out b I Quotient.out c) N))
  rw [hL, hR]
  refine (le_mk N).mpr ?_
  have : ((Quotient.out a U Quotient.out b) I (Quotient.out a U Quotient.out c)) \
    (Quotient.out a U (Quotient.out b I Quotient.out c)) = { } := by
    ext x; simp only [mem_empty_iff_false, mem_sdiff, mem_inter_iff, mem_union]; tauto
  simp [this] using N.empty

noncomputable def sSup (S : Set (AssociatedAlgebra N)) : AssociatedAlgebra N :=
  mk N (Classical.choose
    (N.essentialSup fun a : S => Quotient.out (a : AssociatedAlgebra N)))

theorem sSup_spec (S : Set (AssociatedAlgebra N)) :
  (forall a in S, Le N a (sSup N S)) /\
  forall b, (forall a in S, Le N a b) -> Le N (sSup N S) b := by

```

```

let f : S -> Set X := fun a => Quotient.out (a : AssociatedAlgebra N)
obtain <hu, hleast> := Classical.choose_spec (N.essentialSup f)
constructor
* intro a ha
  unfold sSup
  rw [show a = mk N (Quotient.out a) from (mk_out N a).symm]
  exact (le_mk N).mpr (hu <a, ha>)
* intro b hb
  unfold sSup
  rw [show b = mk N (Quotient.out b) from (mk_out N b).symm]
  refine (le_mk N).mpr ?_
  have hv : forall a : S, N.negligible (f a \ Quotient.out b) := fun a => hb a.1 a.2
  exact hleast (Quotient.out b) hv

theorem compl_compl_mk (a : AssociatedAlgebra N) : compl N (compl N a) = a := by
  unfold compl
  change mk N (Quotient.out (mk N (Quotient.out a)))? = a
  have h : mk N (Quotient.out (mk N (Quotient.out a)))? =
    mk N ((Quotient.out a))? :=
    (mk_eq_iff N).mpr (aeEq_compl N (aeEq_out N))
  rw [h, compl_compl, mk_out]

theorem le_compl_of_le {a b : AssociatedAlgebra N} (h : Le N a b) :
  Le N (compl N b) (compl N a) := by
  unfold compl
  refine (le_mk N).mpr ?_
  have heq : (Quotient.out b)? \ (Quotient.out a)? =
    Quotient.out a \ Quotient.out b := by
    ext x; simp; tauto
  exact heq |> h

theorem le_compl_comm {a b : AssociatedAlgebra N} :
  Le N a b <-> Le N (compl N b) (compl N a) := by
  constructor
  * exact le_compl_of_le N
  * intro h
    simpa [compl_compl_mk] using le_compl_of_le N h

noncomputable def sInf (S : Set (AssociatedAlgebra N)) : AssociatedAlgebra N :=
  compl N (sSup N (compl N '' S))

theorem sInf_spec (S : Set (AssociatedAlgebra N)) :
  (forall a in S, Le N (sInf N S) a) /\
  forall b, (forall a in S, Le N b a) -> Le N b (sInf N S) := by
  constructor
  * intro a ha
    unfold sInf
    have hmem : compl N a in compl N '' S := <a, ha, rfl>
    have hle := (sSup_spec N (compl N '' S)).1 (compl N a) hmem
    exact (le_compl_comm (a := sInf N S) (b := a)).mpr
      (by simpa [sInf, compl_compl_mk] using hle)
  * intro b hb
    unfold sInf
    have hle : forall c in compl N '' S, Le N c (compl N b) := by
      intro c hc
      obtain <a, ha, rfl> := hc
      exact (le_compl_comm (a := b) (b := a)).mp (hb a ha)
    have hsup := (sSup_spec N (compl N '' S)).2 (compl N b) hle
    exact (le_compl_comm (a := b) (b := sInf N S)).mpr
      (by simpa [sInf, compl_compl_mk] using hsup)

theorem le_sSup (S : Set (AssociatedAlgebra N)) {a : AssociatedAlgebra N}
  (ha : a in S) : Le N a (sSup N S) :=

```

```

(sSup_spec N S).1 a ha

theorem sSup_le (S : Set (AssociatedAlgebra N)) {b : AssociatedAlgebra N}
  (h : forall a in S, Le N a b) : Le N (sSup N S) b :=
  (sSup_spec N S).2 b h

theorem sInf_le (S : Set (AssociatedAlgebra N)) {a : AssociatedAlgebra N}
  (ha : a in S) : Le N (sInf N S) a :=
  (sInf_spec N S).1 a ha

theorem le_sInf (S : Set (AssociatedAlgebra N)) {b : AssociatedAlgebra N}
  (h : forall a in S, Le N b a) : Le N b (sInf N S) :=
  (sInf_spec N S).2 b h

noncomputable instance instPartialOrder : PartialOrder (AssociatedAlgebra N) where
  le := Le N
  le_refl := le_refl N
  le_trans := le_trans N
  lt a b := Le N a b /\ not Le N b a
  lt_iff_le_not_ge _ _ := Iff.rfl
  le_antisymm := le_antisymm N

noncomputable instance instLattice : Lattice (AssociatedAlgebra N) where
  __ := instPartialOrder N
  sup := sup N
  inf := inf N
  le_sup_left := le_sup_left N
  le_sup_right := le_sup_right N
  sup_le := fun a b c => sup_le N a b c
  inf_le_left := inf_le_left N
  inf_le_right := inf_le_right N
  le_inf := fun a b c => le_inf N a b c

noncomputable instance instCompleteLattice : CompleteLattice (AssociatedAlgebra N) where
  __ := instLattice N
  sSup := sSup N
  sInf := sInf N
  isLUB_sSup S := <fun a ha => le_sSup N S ha, fun b hb => sSup_le N S hb>
  isGLB_sInf S := <fun a ha => sInf_le N S ha, fun b hb => le_sInf N S hb>
  top := top N
  bot := bot N
  le_top := le_top N
  bot_le := bot_le N

noncomputable instance instBooleanAlgebra : BooleanAlgebra (AssociatedAlgebra N) where
  __ := instCompleteLattice N
  compl := compl N
  sdiff a b := inf N a (compl N b)
  himp a b := sup N b (compl N a)
  inf_compl_le_bot := inf_compl_le_bot N
  top_le_sup_compl := top_le_sup_compl N
  le_top := le_top N
  bot_le := bot_le N

```

Lean 4 source (lines 801–1200)

```

sdiff_eq _ _ := rfl
himp_eq _ _ := rfl
le_sup_inf := le_sup_inf N

noncomputable instance instCompleteBooleanAlgebra :
  CompleteBooleanAlgebra (AssociatedAlgebra N) where
  __ := instCompleteLattice N
  __ := instBooleanAlgebra N

```



```

theorem mk_bot : mk N {} = (False : AssociatedAlgebra N) := rfl

theorem mk_top : mk N Set.univ = ( top : AssociatedAlgebra N) := rfl

theorem mk_eq_bot {s : Set X} : mk N s = (False : AssociatedAlgebra N) <-> N.negligible s :=
  by
  rw [ <- mk_bot, mk_eq_iff, aeEq_empty_iff]

theorem ofMeasure_mk_bot (? : Measure X) [IsFiniteMeasure ?]
  (hN : forall t : Set X, NullMeasurableSet t ?) {s : Set X} (hs : ? s = 0) :
  mk (NegligibilitySpace.ofMeasure ? hN) s = False :=
  (mk_eq_bot _).mpr hs

theorem measRep_aeEq (s : Set X) : aeEq N s (N.measRep s) :=
  N.measRep_symmDiff s

theorem mk_measRep (s : Set X) : mk N (N.measRep s) = mk N s :=
  (mk_eq_iff N).mpr (aeEq_symm N (measRep_aeEq N s))

theorem inf_mk (s t : Set X) : mk N s sqcap mk N t = mk N (s I t) := by
  change inf N (mk N s) (mk N t) = mk N (s I t)
  unfold inf
  exact (mk_eq_iff N).mpr
  (aeEq_inter N (aeEq_out N) (aeEq_out N))

theorem sup_mk (s t : Set X) : mk N s sqsup mk N t = mk N (s U t) := by
  change sup N (mk N s) (mk N t) = mk N (s U t)
  unfold sup
  exact (mk_eq_iff N).mpr
  (aeEq_union N (aeEq_out N) (aeEq_out N))

theorem compl_mk (s : Set X) : (mk N s)? = mk N s? :=
  (mk_compl N s).symm

theorem himp_mk (s t : Set X) : mk N s ? mk N t = mk N (s? U t) := by
  rw [himp_eq, compl_mk, sup_mk, union_comm]

theorem iSup_mk {? : Type*} [Countable ?] (s : ? -> Set X) :
  ( bigcup i, mk N (s i)) = mk N (? i, s i) := by
  refine _root_.le_antisymm (iSup_le fun i => ?upper) ?least
  * change Le N (mk N (s i)) (mk N (? j, s j))
  refine (le_mk N).mpr ?_
  have : s i \ ? j, s j = {} := by
    ext x; simp only [mem_empty_iff_false, mem_sdiff, mem_iUnion]; tauto
  simpa [this] using N.empty
  * set u := bigcup i, mk N (s i)
  have hu : u = mk N (Quotient.out u) := (mk_out N u).symm
  have hi : forall i, N.negligible (s i \ Quotient.out u) := fun i => by
    have hle : mk N (s i) <= u := le_iSup (fun j => mk N (s j)) i
    have : Le N (mk N (s i)) (mk N (Quotient.out u)) := by
      rwa [ <- hu]
    exact (le_mk N).mp this
  have hunion : N.negligible ((? i, s i) \ Quotient.out u) := by
    have heq : (? i, s i) \ Quotient.out u = ? i, s i \ Quotient.out u := by
      ext x; simp only [mem_sdiff, mem_iUnion]; tauto
    exact heq |> N.union_countable (fun i => s i \ Quotient.out u) hi
  change Le N (mk N (? i, s i)) u
  rw [hu]
  exact (le_mk N).mpr hunion

theorem iInf_mk {? : Type*} [Countable ?] (s : ? -> Set X) :
  (? i, mk N (s i)) = mk N (? i, s i) := by

```

```

have hcompl : (? i, mk N (s i)) = (bigcup i, (mk N (s i)))? := by
  rw [← compl_compl (x := ? i, mk N (s i))]
  congr 1
  exact compl_iInf (f := fun i => mk N (s i))
rw [hcompl]
simp_rw [compl_mk]
rw [iSup_mk, compl_mk, compl_iUnion]
simp_rw [compl_compl]

end AssociatedAlgebra

/-!
## Paper `A(X) = Sigma / N(?)`: quotient of measurable sets

`AssociatedAlgebra` quotients all of `Set X`. The paper object is the
quotient of the sigma-algebra `Sigma` by the null ideal. `MeasureAlgebra ?`
is that quotient; `mk` accepts only measurable representatives.
-/

def MeasurableSetoid (? : Measure X) : Setoid {s : Set X // MeasurableSet s} where
  r := fun s t => ? (symmDiff s.val t.val) = 0
  iseqv := {
    refl := fun s => by simp [symmDiff_self]
    symm := fun {s t} h => by rwa [symmDiff_comm]
    trans := fun {s t u} hst ht =>
      measure_mono_null (symmDiff_triangle_subset s.val t.val u.val)
        (measure_union_null hst ht)
  }

/-- Paper `A(X) = Sigma / N(?)`. -/
abbrev MeasureAlgebra (? : Measure X) :=
  Quotient (MeasurableSetoid ?)

namespace MeasureAlgebra

variable {X : Type*} [MeasurableSpace X] (? : Measure X)

def mk (s : Set X) (hs : MeasurableSet s) : MeasureAlgebra ? :=
  Quotient.mk (MeasurableSetoid ?) <s, hs>

theorem mk_eq_iff {s t : Set X} {hs : MeasurableSet s} {ht : MeasurableSet t} :
  mk ? s hs = mk ? t ht <-> ? (symmDiff s t) = 0 :=
  Quotient.eq

theorem mk_congr {s t : Set X} {hs : MeasurableSet s} {ht : MeasurableSet t}
  (h : s = t) : mk ? s hs = mk ? t ht :=
  (mk_eq_iff ?).mpr (by simp [h, symmDiff_self])

@[simp] theorem mk_out (a : MeasureAlgebra ?) :
  mk ? (Quotient.out a).val (Quotient.out a).property = a :=
  Quotient.out_eq a

theorem out_ae {s : Set X} (hs : MeasurableSet s) :
  ? (symmDiff (Quotient.out (mk ? s hs)).val s) = 0 :=
  (mk_eq_iff ?).mp (mk_out ? (mk ? s hs))

theorem ae_empty_iff {s : Set X} : ? (symmDiff s {}) = 0 <-> ? s = 0 := by
  constructor
  * intro h; simpa [symmDiff_def] using h
  * intro hs; simpa [symmDiff_def] using hs

theorem measAe_symm {s t : Set X} (h : ? (symmDiff s t) = 0) :
  ? (symmDiff t s) = 0 := by

```

```

rwa [symmDiff_comm]

theorem measAe_union {s s' t t' : Set X}
  (hs : ? (symmDiff s s') = 0) (ht : ? (symmDiff t t') = 0) :
  ? (symmDiff (s U t) (s' U t')) = 0 :=
  measure_mono_null (union_symmDiff_subset s t s' t') (measure_union_null hs ht)

theorem measAe_inter {s s' t t' : Set X}
  (hs : ? (symmDiff s s') = 0) (ht : ? (symmDiff t t') = 0) :
  ? (symmDiff (s I t) (s' I t')) = 0 :=
  measure_mono_null (inter_symmDiff_subset s t s' t') (measure_union_null hs ht)

theorem measAe_sdiff {s s' t t' : Set X}
  (hs : ? (symmDiff s s') = 0) (ht : ? (symmDiff t t') = 0) :
  ? (symmDiff (s \ t) (s' \ t')) = 0 :=
  measure_mono_null (sdiff_symmDiff_subset s t s' t') (measure_union_null hs ht)

theorem measAe_compl {s t : Set X} (h : ? (symmDiff s t) = 0) :
  ? (symmDiff s? t?) = 0 := by
  have : symmDiff s? t? = symmDiff s t := by
    ext x
    simp only [mem_symmDiff, mem_compl_iff]
  tauto
  rwa [this]

noncomputable def inf (a b : MeasureAlgebra ?) : MeasureAlgebra ? :=
  mk ? ((Quotient.out a).val I (Quotient.out b).val)
  ((Quotient.out a).property.inter (Quotient.out b).property)

noncomputable def sup (a b : MeasureAlgebra ?) : MeasureAlgebra ? :=
  mk ? ((Quotient.out a).val U (Quotient.out b).val)
  ((Quotient.out a).property.union (Quotient.out b).property)

noncomputable def compl (a : MeasureAlgebra ?) : MeasureAlgebra ? :=
  mk ? (Quotient.out a).val? (Quotient.out a).property.compl

def top : MeasureAlgebra ? := mk ? Set.univ MeasurableSet.univ

def bot : MeasureAlgebra ? := mk ? {} MeasurableSet.empty

theorem mk_union (s t : Set X) (hs : MeasurableSet s) (ht : MeasurableSet t) :
  mk ? (s U t) (hs.union ht) = sup ? (mk ? s hs) (mk ? t ht) := by
  unfold sup
  exact (mk_eq_iff ?).mpr
  (measAe_union ? (measAe_symm ? (out_ae ? hs)) (measAe_symm ? (out_ae ? ht)))

theorem mk_inter (s t : Set X) (hs : MeasurableSet s) (ht : MeasurableSet t) :
  mk ? (s I t) (hs.inter ht) = inf ? (mk ? s hs) (mk ? t ht) := by
  unfold inf
  exact (mk_eq_iff ?).mpr
  (measAe_inter ? (measAe_symm ? (out_ae ? hs)) (measAe_symm ? (out_ae ? ht)))

theorem mk_compl (s : Set X) (hs : MeasurableSet s) :
  mk ? s? hs.compl = compl ? (mk ? s hs) := by
  unfold compl
  exact (mk_eq_iff ?).mpr (measAe_compl ? (measAe_symm ? (out_ae ? hs)))

/-- Order: `[s] <= [t]` iff `?(s \ t) = 0`. -/
def Le (a b : MeasureAlgebra ?) : Prop :=
  ? ((Quotient.out a).val \ (Quotient.out b).val) = 0

theorem le_mk {s t : Set X} {hs : MeasurableSet s} {ht : MeasurableSet t} :
  Le ? (mk ? s hs) (mk ? t ht) <-> ? (s \ t) = 0 := by

```

```

have hDelta : ? (symmDiff
  ((Quotient.out (mk ? s hs)).val \ (Quotient.out (mk ? t ht)).val)
  (s \ t)) = 0 :=
  measAe_sdiff ? (out_ae ? hs) (out_ae ? ht)
constructor
* intro h
  have hsub : s \ t ⊆
    ((Quotient.out (mk ? s hs)).val \ (Quotient.out (mk ? t ht)).val) ∪
    symmDiff
      ((Quotient.out (mk ? s hs)).val \ (Quotient.out (mk ? t ht)).val)
      (s \ t) := by
    intro x; simp [mem_union, mem_symmDiff, mem_sdiff]; tauto
  exact measure_mono_null hsub (measure_union_null h hDelta)
* intro h
  have hsub :
    (Quotient.out (mk ? s hs)).val \ (Quotient.out (mk ? t ht)).val ⊆
    (s \ t) ∪
    symmDiff
      ((Quotient.out (mk ? s hs)).val \ (Quotient.out (mk ? t ht)).val)
      (s \ t) := by
    intro x; simp [mem_union, mem_symmDiff, mem_sdiff]; tauto
  exact measure_mono_null hsub (measure_union_null h hDelta)

theorem le_refl (a : MeasureAlgebra ?) : Le ? a a := by
  simp [Le]

theorem le_trans (a b c : MeasureAlgebra ?)
  (hab : Le ? a b) (hbc : Le ? b c) : Le ? a c := by
  have hsub : (Quotient.out a).val \ (Quotient.out c).val ⊆
    ((Quotient.out a).val \ (Quotient.out b).val) ∪
    ((Quotient.out b).val \ (Quotient.out c).val) := by
    intro x hx
    simp only [mem_union, mem_sdiff] at hx |-
    tauto
  exact measure_mono_null hsub (measure_union_null hab hbc)

theorem le_antisymm (a b : MeasureAlgebra ?)
  (hab : Le ? a b) (hba : Le ? b a) : a = b := by
  have : ? (symmDiff (Quotient.out a).val (Quotient.out b).val) = 0 := by
    simp [symmDiff_def] using measure_union_null hab hba
  calc a = mk ? (Quotient.out a).val (Quotient.out a).property := (mk_out ? a).symm
    _ = mk ? (Quotient.out b).val (Quotient.out b).property := (mk_eq_iff ?).mpr this
    _ = b := mk_out ? b

theorem inf_le_left (a b : MeasureAlgebra ?) : Le ? (inf ? a b) a := by
  rw [show a = mk ? (Quotient.out a).val (Quotient.out a).property from
    (mk_out ? a).symm]
  unfold inf
  refine (le_mk ?).mpr ?_
  have : ((Quotient.out a).val ∩ (Quotient.out b).val) \
    (Quotient.out a).val = {} := by
    ext x; simp only [mem_empty_iff_false, mem_sdiff, mem_inter_iff]; tauto
  simp [this] using measure_empty

theorem inf_le_right (a b : MeasureAlgebra ?) : Le ? (inf ? a b) b := by
  rw [show b = mk ? (Quotient.out b).val (Quotient.out b).property from
    (mk_out ? b).symm]
  unfold inf
  refine (le_mk ?).mpr ?_
  have : ((Quotient.out a).val ∩ (Quotient.out b).val) \
    (Quotient.out b).val = {} := by
    ext x; simp only [mem_empty_iff_false, mem_sdiff, mem_inter_iff]; tauto
  simp [this] using measure_empty

```

```

theorem le_inf (a b c : MeasureAlgebra ?)
  (hab : Le ? a b) (hac : Le ? a c) : Le ? a (inf ? b c) := by
  rw [show a = mk ? (Quotient.out a).val (Quotient.out a).property from
    (mk_out ? a).symm]
  unfold inf
  refine (le_mk ?).mpr ?_
  have hsub : (Quotient.out a).val \
    ((Quotient.out b).val I (Quotient.out c).val) =
    ((Quotient.out a).val \ (Quotient.out b).val) U
    ((Quotient.out a).val \ (Quotient.out c).val) := by
    ext x; simp; tauto
  exact hsub |> measure_union_null hab hac

theorem le_sup_left (a b : MeasureAlgebra ?) : Le ? a (sup ? a b) := by
  rw [show a = mk ? (Quotient.out a).val (Quotient.out a).property from
    (mk_out ? a).symm]
  unfold sup
  refine (le_mk ?).mpr ?_
  have : (Quotient.out a).val \
    ((Quotient.out a).val U (Quotient.out b).val) = {} := by
    ext x; simp only [mem_empty_iff_false, mem_sdiff, mem_union]; tauto
  simpa [this] using measure_empty

theorem le_sup_right (a b : MeasureAlgebra ?) : Le ? b (sup ? a b) := by
  rw [show b = mk ? (Quotient.out b).val (Quotient.out b).property from
    (mk_out ? b).symm]
  unfold sup
  refine (le_mk ?).mpr ?_
  have : (Quotient.out b).val \
    ((Quotient.out a).val U (Quotient.out b).val) = {} := by
    ext x; simp only [mem_empty_iff_false, mem_sdiff, mem_union]; tauto
  simpa [this] using measure_empty

theorem sup_le (a b c : MeasureAlgebra ?)
  (hac : Le ? a c) (hbc : Le ? b c) : Le ? (sup ? a b) c := by
  rw [show c = mk ? (Quotient.out c).val (Quotient.out c).property from
    (mk_out ? c).symm]
  unfold sup
  refine (le_mk ?).mpr ?_
  have hsub : ((Quotient.out a).val U (Quotient.out b).val) \
    (Quotient.out c).val =
    ((Quotient.out a).val \ (Quotient.out c).val) U
    ((Quotient.out b).val \ (Quotient.out c).val) := by
    ext x; simp [or_and_right]
  exact hsub |> measure_union_null hac hbc

theorem le_top (a : MeasureAlgebra ?) : Le ? a (top ?) := by
  rw [show a = mk ? (Quotient.out a).val (Quotient.out a).property from
    (mk_out ? a).symm]
  unfold top
  refine (le_mk ?).mpr ?_
  have : (Quotient.out a).val \ Set.univ = {} :=
    diff_eq_empty.mpr (subset_univ _)
  simpa [this] using measure_empty

theorem bot_le (a : MeasureAlgebra ?) : Le ? (bot ?) a := by
  rw [show a = mk ? (Quotient.out a).val (Quotient.out a).property from
    (mk_out ? a).symm]
  unfold bot
  refine (le_mk ?).mpr ?_
  have : ({} \ (Quotient.out a).val) = {} := empty_diff _
  simpa [this] using measure_empty

```

```

theorem inf_compl_le_bot (a : MeasureAlgebra ?) :
  Le ? (inf ? a (compl ? a)) (bot ?) := by
  have hempty : (Quotient.out a).val I (Quotient.out a).val? = {} := by
    ext x; simp only [mem_inter_iff, mem_compl_iff]; tauto
  have : inf ? a (compl ? a) = mk ? {} MeasurableSet.empty := by
    unfold inf compl
    refine (mk_eq_iff ?).mpr ?_
    have hDelta : ? (symmDiff
      ((Quotient.out a).val I
        (Quotient.out (mk ? (Quotient.out a).val?
          (Quotient.out a).property.compl)).val)
      ((Quotient.out a).val I (Quotient.out a).val?)) = 0 :=
      measAe_inter ? (by simp [symmDiff_self]) (out_ae ? _)
    simp [hempty] using hDelta
  rw [this, bot]
  exact le_refl ? _

theorem top_le_sup_compl (a : MeasureAlgebra ?) :
  Le ? (top ?) (sup ? a (compl ? a)) := by
  have huniv : (Quotient.out a).val U (Quotient.out a).val? = Set.univ := by
    ext x; simp only [mem_union, mem_compl_iff]; tauto
  have : sup ? a (compl ? a) = mk ? Set.univ MeasurableSet.univ := by
    unfold sup compl
    refine (mk_eq_iff ?).mpr ?_
    have hDelta : ? (symmDiff
      ((Quotient.out a).val U
        (Quotient.out (mk ? (Quotient.out a).val?
          (Quotient.out a).property.compl)).val)
      ((Quotient.out a).val U (Quotient.out a).val?)) = 0 :=
      measAe_union ? (by simp [symmDiff_self]) (out_ae ? _)
    simp [huniv] using hDelta
  rw [this, top]
  exact le_refl ? _

theorem le_sup_inf (a b c : MeasureAlgebra ?) :
  Le ? (inf ? (sup ? a b) (sup ? a c)) (sup ? a (inf ? b c)) := by
  have hL : inf ? (sup ? a b) (sup ? a c) =
    mk ? (((Quotient.out a).val U (Quotient.out b).val) I
      ((Quotient.out a).val U (Quotient.out c).val))
      (((Quotient.out a).property.union (Quotient.out b).property).inter
        ((Quotient.out a).property.union (Quotient.out c).property)) := by
    change mk ?
    ((Quotient.out (sup ? a b)).val I (Quotient.out (sup ? a c)).val) _ = _
  exact (mk_eq_iff ?).mpr (measAe_inter ?
    (out_ae ? ((Quotient.out a).property.union (Quotient.out b).property))
    (out_ae ? ((Quotient.out a).property.union (Quotient.out c).property)))
  have hR : sup ? a (inf ? b c) =
    mk ? ((Quotient.out a).val U
      ((Quotient.out b).val I (Quotient.out c).val))
      ((Quotient.out a).property.union
        ((Quotient.out b).property.inter (Quotient.out c).property)) := by
    change mk ? ((Quotient.out a).val U (Quotient.out (inf ? b c)).val) _ = _
  exact (mk_eq_iff ?).mpr (measAe_union ? (by simp [symmDiff_self])
    (out_ae ? ((Quotient.out b).property.inter (Quotient.out c).property)))
  rw [hL, hR]
  refine (le_mk ?).mpr ?_
  have : (((Quotient.out a).val U (Quotient.out b).val) I
    ((Quotient.out a).val U (Quotient.out c).val)) \
    ((Quotient.out a).val U ((Quotient.out b).val I (Quotient.out c).val)) =
    {} := by
    ext x; simp only [mem_empty_iff_false, mem_sdiff, mem_inter_iff, mem_union]; tauto
  simp [this] using measure_empty

```

```

theorem sSupWitness [IsFiniteMeasure ?] (S : Set (MeasureAlgebra ?)) :
  exists u : Set X,
    MeasurableSet u /\
    (forall a : S, ? ((Quotient.out (a : MeasureAlgebra ?)).val \ u) = 0) /\
    forall v : Set X,
      (forall a : S, ? ((Quotient.out (a : MeasureAlgebra ?)).val \ v) = 0) ->
        ? (u \ v) = 0 :=
NegligibilitySpace.ofMeasure_essentialSup_measurable ?
(fun a : S => (Quotient.out (a : MeasureAlgebra ?)).val)
(fun a => (Quotient.out (a : MeasureAlgebra ?)).property)

noncomputable def sSup [IsFiniteMeasure ?] (S : Set (MeasureAlgebra ?)) :
  MeasureAlgebra ? :=
mk ? (Classical.choose (sSupWitness ? S))

```

Lean 4 source (lines 1201–1600)

```

(Classical.choose_spec (sSupWitness ? S)).1

theorem sSup_spec [IsFiniteMeasure ?] (S : Set (MeasureAlgebra ?)) :
  (forall a in S, Le ? a (sSup ? S)) /\
  forall b, (forall a in S, Le ? a b) -> Le ? (sSup ? S) b := by
obtain <hu, hleast> := (Classical.choose_spec (sSupWitness ? S)).2
constructor
* intro a ha
  unfold sSup
  rw [show a = mk ? (Quotient.out a).val (Quotient.out a).property from
    (mk_out ? a).symm]
  exact (le_mk ?).mpr (hu <a, ha>)
* intro b hb
  unfold sSup
  rw [show b = mk ? (Quotient.out b).val (Quotient.out b).property from
    (mk_out ? b).symm]
  refine (le_mk ?).mpr ?_
  exact hleast (Quotient.out b).val fun a => hb a.1 a.2

theorem compl_compl_mk (a : MeasureAlgebra ?) : compl ? (compl ? a) = a := by
  unfold compl
  have h : mk ?
    (Quotient.out (mk ? (Quotient.out a).val?
      (Quotient.out a).property.compl)).val?
    (Quotient.out (mk ? (Quotient.out a).val?
      (Quotient.out a).property.compl)).property.compl =
    mk ? ((Quotient.out a).val?)? (Quotient.out a).property.compl.compl :=
    (mk_eq_iff ?).mpr (measAe_compl ? (out_ae ? (Quotient.out a).property.compl))
  refine h.trans ?_
  have h2 : mk ? ((Quotient.out a).val?)? (Quotient.out a).property.compl.compl =
    mk ? (Quotient.out a).val (Quotient.out a).property := by
    refine (mk_eq_iff ?).mpr ?_
    have heq : ((Quotient.out a).val?)? = (Quotient.out a).val := compl_compl _
    simp [heq, symmDiff_self]
    exact h2.trans (mk_out ? a)

theorem le_compl_of_le {a b : MeasureAlgebra ?} (h : Le ? a b) :
  Le ? (compl ? b) (compl ? a) := by
  unfold compl
  refine (le_mk ?).mpr ?_
  have heq : (Quotient.out b).val? \ (Quotient.out a).val? =
    (Quotient.out a).val \ (Quotient.out b).val := by
    ext x; simp; tauto
  exact heq |> h

theorem le_compl_comm {a b : MeasureAlgebra ?} :

```

```

    Le ? a b <-> Le ? (compl ? b) (compl ? a) := by
  constructor
  * exact le_compl_of_le ?
  * intro h
    simp [compl_compl_mk] using le_compl_of_le ? h

noncomputable def sInf [IsFiniteMeasure ?] (S : Set (MeasureAlgebra ?)) :
  MeasureAlgebra ? :=
  compl ? (sSup ? (compl ? ' S))

theorem sInf_spec [IsFiniteMeasure ?] (S : Set (MeasureAlgebra ?)) :
  (forall a in S, Le ? (sInf ? S) a) /\
  forall b, (forall a in S, Le ? b a) -> Le ? b (sInf ? S) := by
  constructor
  * intro a ha
    unfold sInf
    have hmem : compl ? a in compl ? ' S := <a, ha, rfl>
    have hle := (sSup_spec ? (compl ? ' S)).1 (compl ? a) hmem
    exact (le_compl_comm (a := sInf ? S) (b := a)).mpr
      (by simp [sInf, compl_compl_mk] using hle)
  * intro b hb
    unfold sInf
    have hle : forall c in compl ? ' S, Le ? c (compl ? b) := by
      intro c hc
      obtain <a, ha, rfl> := hc
      exact (le_compl_comm (a := b) (b := a)).mp (hb a ha)
    have hsup := (sSup_spec ? (compl ? ' S)).2 (compl ? b) hle
    exact (le_compl_comm (a := b) (b := sInf ? S)).mpr
      (by simp [sInf, compl_compl_mk] using hsup)

theorem le_sSup [IsFiniteMeasure ?] (S : Set (MeasureAlgebra ?))
  {a : MeasureAlgebra ?} (ha : a in S) : Le ? a (sSup ? S) :=
  (sSup_spec ? S).1 a ha

theorem sSup_le [IsFiniteMeasure ?] (S : Set (MeasureAlgebra ?))
  {b : MeasureAlgebra ?} (h : forall a in S, Le ? a b) : Le ? (sSup ? S) b :=
  (sSup_spec ? S).2 b h

theorem sInf_le [IsFiniteMeasure ?] (S : Set (MeasureAlgebra ?))
  {a : MeasureAlgebra ?} (ha : a in S) : Le ? (sInf ? S) a :=
  (sInf_spec ? S).1 a ha

theorem le_sInf [IsFiniteMeasure ?] (S : Set (MeasureAlgebra ?))
  {b : MeasureAlgebra ?} (h : forall a in S, Le ? b a) : Le ? b (sInf ? S) :=
  (sInf_spec ? S).2 b h

noncomputable instance instPartialOrder [IsFiniteMeasure ?] :
  PartialOrder (MeasureAlgebra ?) where
  le := Le ?
  le_refl := le_refl ?
  le_trans := le_trans ?
  lt a b := Le ? a b /\ not Le ? b a
  lt_iff_le_not_ge _ _ := Iff.rfl
  le_antisymm := le_antisymm ?

noncomputable instance instLattice [IsFiniteMeasure ?] :
  Lattice (MeasureAlgebra ?) where
  __ := instPartialOrder ?
  sup := sup ?
  inf := inf ?
  le_sup_left := le_sup_left ?
  le_sup_right := le_sup_right ?
  sup_le := fun a b c => sup_le ? a b c

```



```

inf_le_left := inf_le_left ?
inf_le_right := inf_le_right ?
le_inf := fun a b c => le_inf ? a b c

noncomputable instance instCompleteLattice [IsFiniteMeasure ?] :
  CompleteLattice (MeasureAlgebra ?) where
  __ := instLattice ?
  sSup := sSup ?
  sInf := sInf ?
  isLUB_sSup S := <fun a ha => le_sSup ? S ha, fun b hb => sSup_le ? S hb>
  isGLB_sInf S := <fun a ha => sInf_le ? S ha, fun b hb => le_sInf ? S hb>
  top := top ?
  bot := bot ?
  le_top := le_top ?
  bot_le := bot_le ?

noncomputable instance instBooleanAlgebra [IsFiniteMeasure ?] :
  BooleanAlgebra (MeasureAlgebra ?) where
  __ := instCompleteLattice ?
  compl := compl ?
  sdiff a b := inf ? a (compl ? b)
  himp a b := sup ? b (compl ? a)
  inf_compl_le_bot := inf_compl_le_bot ?
  top_le_sup_compl := top_le_sup_compl ?
  le_top := le_top ?
  bot_le := bot_le ?
  sdiff_eq _ _ := rfl
  himp_eq _ _ := rfl
  le_sup_inf := le_sup_inf ?

noncomputable instance instCompleteBooleanAlgebra [IsFiniteMeasure ?] :
  CompleteBooleanAlgebra (MeasureAlgebra ?) where
  __ := instCompleteLattice ?
  __ := instBooleanAlgebra ?

theorem mk_bot [IsFiniteMeasure ?] :
  mk ? {} MeasurableSet.empty = (False : MeasureAlgebra ?) :=
  rfl

theorem mk_top [IsFiniteMeasure ?] :
  mk ? Set.univ MeasurableSet.univ = ( top : MeasureAlgebra ?) :=
  rfl

theorem mk_eq_bot [IsFiniteMeasure ?] {s : Set X} {hs : MeasurableSet s} :
  mk ? s hs = (False : MeasureAlgebra ?) <-> ? s = 0 := by
  rw [ <- mk_bot, mk_eq_iff, ae_empty_iff]

theorem inf_mk [IsFiniteMeasure ?] (s t : Set X) (hs : MeasurableSet s)
  (ht : MeasurableSet t) :
  mk ? s hs sqcap mk ? t ht = mk ? (s ∩ t) (hs.inter ht) :=
  (mk_inter ? s t hs ht).symm

theorem sup_mk [IsFiniteMeasure ?] (s t : Set X) (hs : MeasurableSet s)
  (ht : MeasurableSet t) :
  mk ? s hs sqsup mk ? t ht = mk ? (s ∪ t) (hs.union ht) :=
  (mk_union ? s t hs ht).symm

theorem compl_mk [IsFiniteMeasure ?] (s : Set X) (hs : MeasurableSet s) :
  (mk ? s hs)? = mk ? s? hs.compl :=
  (mk_compl ? s hs).symm

theorem himp_mk [IsFiniteMeasure ?] (s t : Set X) (hs : MeasurableSet s)
  (ht : MeasurableSet t) :

```

```

mk ? s hs ? mk ? t ht = mk ? (s ? U t) (hs.compl.union ht) := by
rw [himp_eq, compl_mk, sup_mk]
exact (mk_eq_iff ?).mpr (by simp [union_comm, symmDiff_self])

/-- Boolean biconditional of two classes: membership in `s` iff membership in `t`. -/
theorem iff_mk [IsFiniteMeasure ?] (s t : Set X) (hs : MeasurableSet s)
(ht : MeasurableSet t) :
(mk ? s hs ? mk ? t ht) sqcap (mk ? t ht ? mk ? s hs) =
mk ? ((s I t) U (s ? I t ?))
((hs.inter ht).union (hs.compl.inter ht.compl)) := by
rw [himp_mk, himp_mk, inf_mk]
exact (mk_eq_iff ?).mpr (by
have : (s ? U t) I (t ? U s) = (s I t) U (s ? I t ?) := by
ext x
simp only [mem_union, mem_inter_iff, mem_compl_iff]
tauto
simp [this, symmDiff_self])

theorem iSup_mk [IsFiniteMeasure ?] {? : Type*} [Countable ?]
(s : ? -> Set X) (hs : forall i, MeasurableSet (s i)) :
(bigcup i, mk ? (s i) (hs i)) = mk ? (? i, s i) (MeasurableSet.iUnion hs) := by
refine _root_.le_antisymm (iSup_le fun i => ?upper) ?least
* refine (le_mk ?).mpr ?_
have : s i \ ? j, s j = {} := by
ext x
simp only [mem_empty_iff_false, mem_sdiff, mem_iUnion]
tauto
simpa [this] using measure_empty
* set u := bigcup i, mk ? (s i) (hs i)
have hu : u = mk ? (Quotient.out u).val (Quotient.out u).property :=
(mk_out ? u).symm
have hi : forall i, ? (s i \ (Quotient.out u).val) = 0 := fun i => by
have hle : mk ? (s i) (hs i) <= u := le_iSup (fun j => mk ? (s j) (hs j)) i
have : Le ? (mk ? (s i) (hs i))
(mk ? (Quotient.out u).val (Quotient.out u).property) := by
rwa [ <- hu]
exact (le_mk ?).mp this
have hunion : ? ((? i, s i) \ (Quotient.out u).val) = 0 := by
have heq : (? i, s i) \ (Quotient.out u).val =
? i, s i \ (Quotient.out u).val := by
ext x
simp only [mem_sdiff, mem_iUnion]
tauto
exact heq |> measure_iUnion_null hi
change Le ? (mk ? (? i, s i) (MeasurableSet.iUnion hs)) u
rw [hu]
exact (le_mk ?).mpr hunion

theorem iInf_mk [IsFiniteMeasure ?] {? : Type*} [Countable ?]
(s : ? -> Set X) (hs : forall i, MeasurableSet (s i)) :
(? i, mk ? (s i) (hs i)) = mk ? (? i, s i) (MeasurableSet.iInter hs) := by
have hcompl : (? i, mk ? (s i) (hs i)) = (bigcup i, (mk ? (s i) (hs i)))? := by
rw [ <- compl_compl (x := ? i, mk ? (s i) (hs i))]
congr 1
exact compl_iInf (f := fun i => mk ? (s i) (hs i))
rw [hcompl]
simp_rw [compl_mk]
rw [iSup_mk ? (fun i => (s i)?) (fun i => (hs i).compl), compl_mk]
refine (mk_eq_iff ?).mpr ?_
have heq : (? i, (s i)?) = ? i, s i := by
ext x
simp
simp [heq, symmDiff_self]

```

```

theorem iInf_mk_finset [IsFiniteMeasure ?] {? : Type*} [DecidableEq ?]
  (K : Finset ?) (s : ? -> Set X) (hs : forall k, MeasurableSet (s k)) :
  (? k in K, mk ? (s k) (hs k)) =
    mk ? (? k in K, s k) (Finset.measurableSet_biInter K fun k _ => hs k) := by
  induction K using Finset.induction with
  | empty =>
    have h1 : (? k in ({} : Finset ?), mk ? (s k) (hs k)) = top := by simp
    have h2 : (? k in ({} : Finset ?), s k) = Set.univ := by simp
    rw [h1, <- mk_top]
    exact mk_congr ? h2.symm
  | insert a K ha ih =>
    rw [Finset.iInf_insert, ih, iInf_mk]
    exact mk_congr ? (Finset.set_biInter_insert a K s).symm

/-- When `hN` is available, send the paper algebra into the all-sets
associated algebra by forgetting the measurability witness. -/
noncomputable def toAssociated [IsFiniteMeasure ?]
  (hN : forall t : Set X, NullMeasurableSet t ?) :
  MeasureAlgebra ? -> AssociatedAlgebra (NegligibilitySpace.ofMeasure ? hN) :=
  Quotient.lift
    (fun s => AssociatedAlgebra.mk (NegligibilitySpace.ofMeasure ? hN) s.val)
    (fun _s _t h =>
      (AssociatedAlgebra.mk_eq_iff (NegligibilitySpace.ofMeasure ? hN)).mpr h)

theorem toAssociated_mk [IsFiniteMeasure ?]
  (hN : forall t : Set X, NullMeasurableSet t ?)
  (s : Set X) (hs : MeasurableSet s) :
  toAssociated ? hN (mk ? s hs) =
    AssociatedAlgebra.mk (NegligibilitySpace.ofMeasure ? hN) s :=
  rfl

end MeasureAlgebra

/-- Lemma 41 shape: the constant random variable `K_S` has check-image `S`. -/
def constRV (S : Set Y) : X -> Set Y := fun _ => S

theorem constRV_isL0 (S : Set Y) : IsL0 (X := X) (constRV S) := by
  intro y
  by_cases hy : y in S
  * have : constRV (X := X) S ^-1' posBasic y = Set.univ := by
    ext x; simp [constRV, posBasic, hy]
    simp [this] using MeasurableSet.univ
  * have : constRV (X := X) S ^-1' posBasic y = {} := by
    ext x; simp [constRV, posBasic, hy]
    simp [this] using MeasurableSet.empty

/-- Equation (4): `G_X([a])(y) = [a^-1(B_y)]`, as an `A`-subset when `A = Set X`
(before quotienting by null sets). -/
def G_pre (a : X -> Set Y) : ASubset (Set X) Y :=
  fun y => a ^-1' posBasic y

/-- Lemma 41: the constant random variable `K_S` is sent to the check-set `S`. -/
theorem lemma_41 (S : Set Y) :
  G_pre (constRV (X := X) S) = checkSet (A := Set X) S := by
  ext y
  by_cases hy : y in S
  * simp [G_pre, constRV, posBasic, checkSet, hy]
  * simp [G_pre, constRV, posBasic, checkSet, hy]

theorem G_pre_const (S : Set Y) :
  G_pre (constRV (X := X) S) = checkSet (A := Set X) S :=
  lemma_41 S

```

```

/-!
## `L?` modulo a.e. (Lemma 38) and `G_X` (Proposition 39)
-/

/-- Measurable random variables, before a.e. quotient. -/
def LOFun (X Y : Type*) [MeasurableSpace X] :=
  {a : X -> Set Y // IsLO a}

def LOAE (N : NegligibilitySpace X) (a b : LOFun X Y) : Prop :=
  N.negligible (LOEq a.val b.val)?

theorem LOAE_refl (N : NegligibilitySpace X) (a : LOFun X Y) : LOAE N a a := by
  simpa [LOAE, LOEq] using N.empty

theorem LOAE_symm (N : NegligibilitySpace X) {a b : LOFun X Y} (h : LOAE N a b) :
  LOAE N b a := by
  have : LOEq a.val b.val = LOEq b.val a.val := by
    ext x; simp [LOEq, eq_comm]
  simpa [LOAE, this] using h

theorem LOAE_trans (N : NegligibilitySpace X) {a b c : LOFun X Y}
  (hab : LOAE N a b) (hbc : LOAE N b c) : LOAE N a c := by
  have hsub : (LOEq a.val c.val)? subseq (LOEq a.val b.val)? U (LOEq b.val c.val)? := by
    intro x hx
    have hac : a.val x != c.val x := by simpa [LOEq] using hx
    simp only [mem_union, mem_compl_iff, LOEq]
    exact not_and_or.mp fun <hab, hbc> => hac (hab.trans hbc)
  exact N.mono hsub (N.union_2 hab hbc)

def LOSetoid (N : NegligibilitySpace X) (Y : Type*) : Setoid (LOFun X Y) where
  r := LOAE N
  iseqv := <LOAE_refl N, fun { _ _ } => LOAE_symm N, fun { _ _ _ } => LOAE_trans N>

/-- Paper `L?(X; ?(Y))`: measurable maps modulo a.e. equality. -/
abbrev LO (N : NegligibilitySpace X) (Y : Type*) :=
  Quotient (LOSetoid N Y)

def LO.mk (N : NegligibilitySpace X) (a : LOFun X Y) : LO N Y :=
  Quotient.mk (LOSetoid N Y) a

theorem LOLe_subset_of_ae (N : NegligibilitySpace X) (a a' b b' : X -> Set Y) :
  symmDiff (LOLe a b) (LOLe a' b') subseq (LOEq a a')? U (LOEq b b')? := by
  intro x hx
  by_contra hne
  have heq : a x = a' x /\ b x = b' x := by
    simp only [mem_union, mem_compl_iff, LOEq] at hne
    exact <not_not.mp (not_or.mp hne).1, not_not.mp (not_or.mp hne).2>
  rcases (mem_symmDiff.mp hx) with h | h
  * have : a' x subseq b' x := by rw [heq.1, <- heq.2]; exact h.1
    exact h.2 this
  * have : a x subseq b x := by rw [heq.1, heq.2]; exact h.1
    exact h.2 this

theorem LOLe_aeEq (N : NegligibilitySpace X) {a a' b b' : LOFun X Y}
  (ha : LOAE N a a') (hb : LOAE N b b') :
  aeEq N (LOLe a.val b.val) (LOLe a'.val b'.val) :=
  N.mono (LOLe_subset_of_ae N a.val a'.val b.val b'.val) (N.union_2 ha hb)

noncomputable def LO.le (N : NegligibilitySpace X) (a b : LO N Y) :
  AssociatedAlgebra N :=
  Quotient.lift_2 (fun a b => AssociatedAlgebra.mk N (LOLe a.val b.val))
  (fun a b a' b' ha hb =>

```

```

    (AssociatedAlgebra.mk_eq_iff N).mpr (l0Le_aeEq N ha hb)) a b

theorem L0.le_mk (N : NegligibilitySpace X) (a b : L0Fun X Y) :
  L0.le N (L0.mk N a) (L0.mk N b) = AssociatedAlgebra.mk N (l0Le a.val b.val) :=
  rfl

theorem L0.le_trans (N : NegligibilitySpace X) (a b c : L0 N Y) :
  L0.le N a b sqcap L0.le N b c <= L0.le N a c := by
  refine Quotient.inductionOn_3 a b c fun a b c => ?_
  simp only [L0.le, L0.mk, Quotient.lift_2_mk]
  rw [AssociatedAlgebra.inf_mk]
  change AssociatedAlgebra.le N
  (AssociatedAlgebra.mk N (l0Le a.val b.val I l0Le b.val c.val))
  (AssociatedAlgebra.mk N (l0Le a.val c.val))
  refine (AssociatedAlgebra.le_mk N).mpr ?_
  have : (l0Le a.val b.val I l0Le b.val c.val) \ l0Le a.val c.val = {} := by
    ext x
    simp only [mem_empty_iff_false, mem_sdiff, mem_inter_iff, l0Le]
    exact iff_false_intro fun <<hab, hbc>>, hn => hn (Set.Subset.trans hab hbc)
  simpa [this] using N.empty

theorem L0.le_le_refl (N : NegligibilitySpace X) (a b : L0 N Y) :
  L0.le N a b <= L0.le N a a sqcap L0.le N b b := by
  refine Quotient.inductionOn_2 a b fun a b => ?_
  simp only [L0.le, L0.mk, Quotient.lift_2_mk]
  rw [AssociatedAlgebra.inf_mk, l0Le_refl, l0Le_refl, inter_self]
  change AssociatedAlgebra.le N
  (AssociatedAlgebra.mk N (l0Le a.val b.val))
  (AssociatedAlgebra.mk N Set.univ)
  refine (AssociatedAlgebra.le_mk N).mpr ?_
  have : l0Le a.val b.val \ Set.univ = {} :=
    (sdiff_eq_empty.2 (subset_univ _))
  simpa [this] using N.empty

/-- Lemma 38: `L?` is an `A(X)`-poset. -/
noncomputable def l0Poset (N : NegligibilitySpace X) :
  APoset (A := AssociatedAlgebra N) (L0 N Y) where
  le := L0.le N
  trans := L0.le_trans N

Lean 4 source (lines 1601–2000)

le_le_refl := L0.le_le_refl N

theorem lemma_38 (N : NegligibilitySpace X) :
  (l0Poset (Y := Y) N).le = L0.le N /\
  (forall a b c, (l0Poset (Y := Y) N).le a b sqcap (l0Poset (Y := Y) N).le b c <=
    (l0Poset (Y := Y) N).le a c) /\
  (forall a b, (l0Poset (Y := Y) N).le a b <=
    (l0Poset (Y := Y) N).le a a sqcap (l0Poset (Y := Y) N).le b b) :=
  <rfl, L0.le_trans N, L0.le_le_refl N>

theorem G_pre_aeEq (N : NegligibilitySpace X) {a b : L0Fun X Y} (h : l0AE N a b)
  (y : Y) : aeEq N (G_pre a.val y) (G_pre b.val y) := by
  have hsub : symmDiff (G_pre a.val y) (G_pre b.val y) subseteq (l0Eq a.val b.val)? := by
    intro x hx
    simp only [mem_compl_iff, l0Eq]
    intro heq
    simp only [G_pre, posBasic, mem_symmDiff, mem_preimage, mem_setOf] at hx
    rw [heq] at hx
    exact hx.elim (fun h => h.2 h.1) (fun h => h.2 h.1)
  exact N.mono hsub h

/-- Equation (4) on the a.e. quotient: `G_X([a])(y) = [a~-1(B_y)]`. -/

```

```

noncomputable def G_X (N : NegligibilitySpace X) (a : LO N Y) :
  ASubset (AssociatedAlgebra N) Y :=
  Quotient.lift (fun a y => AssociatedAlgebra.mk N (G_pre a.val y))
    (fun a b h => funext fun y =>
      (AssociatedAlgebra.mk_eq_iff N).mpr (G_pre_aeEq N h y)) a

theorem G_X_mk (N : NegligibilitySpace X) (a : LOFun X Y) (y : Y) :
  G_X N (LO.mk N a) y = AssociatedAlgebra.mk N (G_pre a.val y) :=
  rfl

/-- Lemma 41 on the associated algebra: `G_X([K_S]) = S` as `A(X)`-subsets. -/
theorem lemma_41_algebra (N : NegligibilitySpace X) (S : Set Y) :
  G_X N (LO.mk N <constRV (X := X) S, constRV_isLO (X := X) S>) =
    checkSet (A := AssociatedAlgebra N) S := by
  let a : LOFun X Y := <constRV (X := X) S, constRV_isLO (X := X) S>
  change G_X N (LO.mk N a) = checkSet (A := AssociatedAlgebra N) S
  funext y
  rw [G_X_mk]
  by_cases hy : y in S
  * have : G_pre a.val y = Set.univ := by
    ext x; simp [G_pre, posBasic, a, constRV, hy]
    rw [this, AssociatedAlgebra.mk_top, checkSet_mem hy]
  * have : G_pre a.val y = ({ } : Set X) := by
    ext x; simp [G_pre, posBasic, a, constRV, hy]
    rw [this, AssociatedAlgebra.mk_bot, checkSet_not_mem hy]

theorem G_X_le (N : NegligibilitySpace X) [Countable Y] (a b : LO N Y) :
  subsetB (G_X N a) (G_X N b) = LO.le N a b := by
  refine Quotient.inductionOn_2 a b fun a b => ?_
  unfold subsetB
  simp only [G_X, LO.le, LO.mk, Quotient.lift_mk, Quotient.lift_2_mk]
  have : (? y, AssociatedAlgebra.mk N (G_pre a.val y)) =
    AssociatedAlgebra.mk N (G_pre b.val y) =
    AssociatedAlgebra.mk N (? y, (G_pre a.val y)? U G_pre b.val y) := by
  rw [ <- AssociatedAlgebra.iInf_mk]
  congr 1
  ext y
  exact AssociatedAlgebra.himp_mk N _ _
  refine this.trans (congrArg (AssociatedAlgebra.mk N) ?_)
  ext x
  constructor
  * intro hx y hy
    have hyx := mem_iInter.mp hx y
    simp only [mem_union, mem_compl_iff, G_pre, posBasic, mem_preimage, mem_setOf] at hyx
    exact hyx.resolve_left (not_not.mpr hy)
  * intro hx
    refine mem_iInter.mpr fun y => ?_
    simp only [mem_union, mem_compl_iff, G_pre, posBasic, mem_preimage, mem_setOf, l0Le] at hx
    | -
    exact or_iff_not_imp_left.mpr fun hy => hx (not_not.mp hy)

/-- Inverse of `G_X`: `a(x) = {y | x in measurable representative of b(y)}`. -/
noncomputable def G_X_inv (N : NegligibilitySpace X) (b : ASubset (AssociatedAlgebra N) Y) :
  LOFun X Y :=
  <fun x => {y | x in N.measRep (Quotient.out (b y))}, fun y => by
    have : (fun x : X => {y : Y | x in N.measRep (Quotient.out (b y))}) ^-1' posBasic y =
      N.measRep (Quotient.out (b y)) := by
    ext x; simp [posBasic]
    simpa [this] using N.measRep_measurable _>

theorem G_X_inv_right (N : NegligibilitySpace X) (b : ASubset (AssociatedAlgebra N) Y) :
  G_X N (LO.mk N (G_X_inv N b)) = b := by
  funext y

```

```

rw [G_X_mk]
simp only [G_X_inv, G_pre, posBasic]
have : (fun x : X => {y : Y | x in N.measRep (Quotient.out (b y))}) ^-1' {S | y in S} =
  N.measRep (Quotient.out (b y)) := by
  ext x; simp
rw [this, AssociatedAlgebra.mk_measRep, AssociatedAlgebra.mk_out]

theorem G_X_inv_left (N : NegligibilitySpace X) [Countable Y] (a : LO N Y) :
  LO.mk N (G_X_inv N (G_X N a)) = a := by
  refine Quotient.inductionOn a fun a => Quotient.sound ?_
  change lOAE N (G_X_inv N (G_X N (LO.mk N a))) a
  unfold lOAE
  let a' := (G_X_inv N (G_X N (LO.mk N a))).val
  have hy : forall y, N.negligible (symmDiff
    (N.measRep (Quotient.out (AssociatedAlgebra.mk N (G_pre a.val y))))
    (G_pre a.val y)) := fun y =>
    aeEq_trans N (aeEq_symm N (N.measRep_symmDiff _))
    (AssociatedAlgebra.aeEq_out N)
  have hsub : (lOEq a' a.val)? subseTEq
    ? y, symmDiff
    (N.measRep (Quotient.out (AssociatedAlgebra.mk N (G_pre a.val y))))
    (G_pre a.val y) := by
    intro x hx
    have hne : a' x != a.val x := by
      simp [lOEq] using hx
    obtain <y, hyx> : exists y, not (y in a' x <-> y in a.val x) :=
      not_forall.mp (mt Set.ext hne)
    refine mem_iUnion.mpr <y, ?_>
    have hab : y in a' x <->
      x in N.measRep (Quotient.out (AssociatedAlgebra.mk N (G_pre a.val y))) := by
      simp [a', G_X_inv, G_X_mk]
    have hyx' : not (x in N.measRep (Quotient.out (AssociatedAlgebra.mk N (G_pre a.val y)))
      <->
        y in a.val x) := by
      rwa [← hab]
    rw [mem_symmDiff, G_pre, posBasic]
    by_cases hP : x in N.measRep (Quotient.out (AssociatedAlgebra.mk N (G_pre a.val y)))
    * exact Or.inl <hP, fun hQ => hyx' (iff_of_true hP hQ)>
    * refine Or.inr <?_, hP>
      by_contra hQ
      exact hyx' (iff_of_false hP hQ)
  exact N.mono hsub (N.union_countable _ hy)

/-- Proposition 39: `G_X` is a strict isomorphism of `A(X)`-posets. -/
noncomputable def proposition_39 (N : NegligibilitySpace X) [Countable Y] :
  APoset.StrictIso (lOPoset (Y := Y) N) (powerPoset (A := AssociatedAlgebra N) (X := Y))
  where
  toFun := G_X N
  invFun := fun b => LO.mk N (G_X_inv N b)
  left_inv := G_X_inv_left N
  right_inv := G_X_inv_right N
  preserve_le := fun a b => by
    change subsetB (G_X N a) (G_X N b) = LO.le N a b
    exact G_X_le N a b

/-!
## Proposition 40: pointwise Engeler application is an application homomorphism
-/

/-- Boolean-valued Engeler application on `A`-subsets of a ground type
(the formula in the proof of Proposition 40). -/
noncomputable def engelerAppA {A E : Type*} [CompleteBooleanAlgebra A] [DecidableEq E]
  (pair : Finset E x E -> E) (F X : ASubset A E) : ASubset A E :=

```

```

fun q => bigcup K : Finset E, F (pair (K, q)) sqcap ? k in K, X k

/-- Pointwise Engeler application on random variables. -/
def l0App [DecidableEq E] (pair : Finset E x E -> E)
  (a b : X -> Set E) : X -> Set E :=
  fun x => engelerApp pair (a x) (b x)

theorem l0App_preimage [DecidableEq E] (pair : Finset E x E -> E)
  (a b : X -> Set E) (q : E) :
  l0App pair a b ^-1' posBasic q =
  ? K : Finset E,
    (a ^-1' posBasic (pair (K, q))) I ? k in K, b ^-1' posBasic k := by
  ext x
  simp only [l0App, posBasic, mem_preimage, mem_setOf, mem_iUnion, mem_inter_iff,
    mem_iInter, engelerApp]
  constructor
  * intro <K, hK, hp>
    exact <K, hp, fun k hk => hK hk>
  * intro <K, hp, hK>
    exact <K, fun k hk => hK k hk, hp>

theorem l0App_isL0 [DecidableEq E] [Countable E] (pair : Finset E x E -> E)
  {a b : X -> Set E} (ha : IsL0 a) (hb : IsL0 b) : IsL0 (l0App pair a b) := by
  intro q
  rw [l0App_preimage]
  refine MeasurableSet.iUnion fun K => (ha (pair (K, q))).inter ?_
  exact Finset.measurableSet_biInter K fun k _ => hb k

theorem l0App_ae [DecidableEq E] [Countable E] (N : NegligibilitySpace X)
  (pair : Finset E x E -> E) {a a' b b' : LOFun X E}
  (ha : LOAE N a a') (hb : LOAE N b b') :
  LOAE N <l0App pair a.val b.val, l0App_isL0 pair a.property b.property>
    <l0App pair a'.val b'.val, l0App_isL0 pair a'.property b'.property> := by
  have hsub : (LOEq (l0App pair a.val b.val) (l0App pair a'.val b'.val)) ? subseteq
    (LOEq a.val a'.val) ? U (LOEq b.val b'.val) ? := by
  intro x hx
  simp only [mem_union, mem_compl_iff, LOEq, l0App] at hx |-
  exact not_and_or.mp fun <haeq, hbeq> => hx (by
    change a.val x = a'.val x at haeq
    change b.val x = b'.val x at hbeq
    change l0App pair a.val b.val x = l0App pair a'.val b'.val x
    simp only [l0App]
    rw [haeq, hbeq])
  exact N.mono hsub (N.union_2 ha hb)

/-- Quotiented pointwise application `[a] * [b] = [a * b]`. -/
noncomputable def L0.app [DecidableEq E] [Countable E] (N : NegligibilitySpace X)
  (pair : Finset E x E -> E) (a b : L0 N E) : L0 N E :=
  Quotient.lift_2
    (fun a b => L0.mk N <l0App pair a.val b.val, l0App_isL0 pair a.property b.property>)
    (fun a b a' b' ha hb => by
      refine Quotient.sound ?_
      exact l0App_ae N pair ha hb) a b

theorem L0.app_mk [DecidableEq E] [Countable E] (N : NegligibilitySpace X)
  (pair : Finset E x E -> E) (a b : LOFun X E) :
  L0.app N pair (L0.mk N a) (L0.mk N b) =
  L0.mk N <l0App pair a.val b.val, l0App_isL0 pair a.property b.property> :=
  rfl

namespace AssociatedAlgebra

variable {X : Type*} [MeasurableSpace X] (N : NegligibilitySpace X)

```



```

theorem iInf_mk_finset {? : Type*} [DecidableEq ?] (K : Finset ?) (s : ? -> Set X) :
  (? k in K, mk N (s k)) = mk N (? k in K, s k) := by
  induction K using Finset.induction with
  | empty =>
    have h1 : (? k in ({} : Finset ?), mk N (s k)) = top := by simp
    have h2 : (? k in ({} : Finset ?), s k) = Set.univ := by simp
    rw [h1, h2, mk_top]
  | insert a K ha ih =>
    rw [Finset.iInf_insert, Finset.set_biInter_insert, ih, inf_mk]

end AssociatedAlgebra

theorem G_pre_l0App [DecidableEq E] (pair : Finset E x E -> E)
  (a b : X -> Set E) (q : E) :
  G_pre (l0App pair a b) q =
    ? K : Finset E, G_pre a (pair (K, q)) I ? k in K, G_pre b k :=
  l0App_preimage pair a b q

/-- Proposition 40: `G_X` is an application homomorphism. -/
theorem proposition_40 [DecidableEq E] [Countable E] (N : NegligibilitySpace X)
  (pair : Finset E x E -> E) (a b : L0 N E) :
  G_X N (L0.app N pair a b) = engelerAppA pair (G_X N a) (G_X N b) := by
  refine Quotient.inductionOn_2 a b fun a b => ?_
  funext q
  have happ :
    L0.app N pair (Quotient.mk (l0Setoid N E) a) (Quotient.mk (l0Setoid N E) b) =
      L0.mk N <l0App pair a.val b.val, l0App_isL0 pair a.property b.property> :=
    rfl
  rw [happ]
  have hG : G_X N (L0.mk N <l0App pair a.val b.val, l0App_isL0 pair a.property b.property>) q =
    AssociatedAlgebra.mk N (G_pre (l0App pair a.val b.val) q) :=
    rfl
  rw [hG, G_pre_l0App]
  haveI : Countable (Finset E) := inferInstance
  have hunion :
    AssociatedAlgebra.mk N
      (? K : Finset E, G_pre a.val (pair (K, q)) I ? k in K, G_pre b.val k) =
      bigcup K : Finset E,
      AssociatedAlgebra.mk N
        (G_pre a.val (pair (K, q)) I ? k in K, G_pre b.val k) :=
    (AssociatedAlgebra.iSup_mk N
      (fun K : Finset E => G_pre a.val (pair (K, q)) I ? k in K, G_pre b.val k)).symm
  rw [hunion]
  refine iSup_congr fun K => ?_
  have haG : G_X N (Quotient.mk (l0Setoid N E) a) (pair (K, q)) =
    AssociatedAlgebra.mk N (G_pre a.val (pair (K, q))) := rfl
  have hbG : forall k, G_X N (Quotient.mk (l0Setoid N E) b) k =
    AssociatedAlgebra.mk N (G_pre b.val k) := fun _ => rfl
  simp_rw [haG, hbG]
  rw [AssociatedAlgebra.iInf_mk_finset, <- AssociatedAlgebra.inf_mk]

/-!
## Paper `L?` / `G_X` on `MeasureAlgebra` (`A(X) = Sigma / N`)

The un-suffixed `G_X` / `lemma_38` / `proposition_39` / `proposition_40` /
`lemma_41_algebra` remain the all-sets `AssociatedAlgebra` forms. These
`_measure` names are the paper maps on `MeasureAlgebra`?`.
-/

def l0AE_measure (? : Measure X) (a b : L0Fun X Y) : Prop :=
  ? (l0Eq a.val b.val)? = 0

```

```

theorem l0AE_measure_refl (? : Measure X) (a : L0Fun X Y) :
  l0AE_measure ? a a := by
  simp [l0AE_measure, l0Eq] using measure_empty

theorem l0AE_measure_symm (? : Measure X) {a b : L0Fun X Y}
  (h : l0AE_measure ? a b) : l0AE_measure ? b a := by
  have : l0Eq a.val b.val = l0Eq b.val a.val := by
    ext x; simp [l0Eq, eq_comm]
  simp [l0AE_measure, this] using h

theorem l0AE_measure_trans (? : Measure X) {a b c : L0Fun X Y}
  (hab : l0AE_measure ? a b) (hbc : l0AE_measure ? b c) :
  l0AE_measure ? a c := by
  have hsub : (l0Eq a.val c.val)? subseq (l0Eq a.val b.val)? U (l0Eq b.val c.val)? := by
    intro x hx
    have hac : a.val x != c.val x := by simp [l0Eq] using hx
    simp only [mem_union, mem_compl_iff, l0Eq]
    exact not_and_or.mp fun <hab, hbc> => hac (hab.trans hbc)
  exact measure_mono_null hsub (measure_union_null hab hbc)

def l0Setoid_measure (? : Measure X) (Y : Type*) : Setoid (L0Fun X Y) where
  r := l0AE_measure ?
  iseqv := <l0AE_measure_refl ?, fun { _ _ } => l0AE_measure_symm ?,
    fun { _ _ } => l0AE_measure_trans ?>

/-- Paper `L?(X; ?(Y))` on `A(X) = Sigma / N(?)`. -/
abbrev L0Measure (? : Measure X) (Y : Type*) :=
  Quotient (l0Setoid_measure ? Y)

def L0.mk_measure (? : Measure X) (a : L0Fun X Y) : L0Measure ? Y :=
  Quotient.mk (l0Setoid_measure ? Y) a

theorem l0Le_subset_of_ae_measure (a a' b b' : X -> Set Y) :
  symmDiff (l0Le a b) (l0Le a' b') subseq (l0Eq a a')? U (l0Eq b b')? := by
  intro x hx
  by_contra hne
  have heq : a x = a' x /\ b x = b' x := by
    simp only [mem_union, mem_compl_iff, l0Eq] at hne
    exact <not_not.mp (not_or.mp hne).1, not_not.mp (not_or.mp hne).2>
  rcases (mem_symmDiff.mp hx) with h | h
  * have : a' x subseq b' x := by rw [ <- heq.1, <- heq.2]; exact h.1
    exact h.2 this
  * have : a x subseq b x := by rw [heq.1, heq.2]; exact h.1
    exact h.2 this

theorem l0Le_aeEq_measure (? : Measure X) {a a' b b' : L0Fun X Y}
  (ha : l0AE_measure ? a a') (hb : l0AE_measure ? b b') :
  ? (symmDiff (l0Le a.val b.val) (l0Le a'.val b'.val)) = 0 :=
  measure_mono_null (l0Le_subset_of_ae_measure a.val a'.val b.val b'.val)
  (measure_union_null ha hb)

noncomputable def L0.le_measure (? : Measure X) [Countable Y]
  (a b : L0Measure ? Y) : MeasureAlgebra ? :=
  Quotient.lift_2
    (fun a b => MeasureAlgebra.mk ? (l0Le a.val b.val)
      (measurableSet_l0Le a.property b.property))
    (fun a b a' b' ha hb =>
      (MeasureAlgebra.mk_eq_iff ?).mpr (l0Le_aeEq_measure ? ha hb)) a b

theorem L0.le_measure_mk (? : Measure X) [Countable Y] (a b : L0Fun X Y) :
  L0.le_measure ? (L0.mk_measure ? a) (L0.mk_measure ? b) =
  MeasureAlgebra.mk ? (l0Le a.val b.val)
  (measurableSet_l0Le a.property b.property) :=

```

```

rfl

theorem L0.le_trans_measure (? : Measure X) [IsFiniteMeasure ?] [Countable Y]
  (a b c : L0Measure ? Y) :
  L0.le_measure ? a b sqcap L0.le_measure ? b c <= L0.le_measure ? a c := by
  refine Quotient.inductionOn_3 a b c fun a b c => ?_
  simp only [L0.le_measure, L0.mk_measure, Quotient.lift_2_mk]
  rw [MeasureAlgebra.inf_mk]
  change MeasureAlgebra.Le ?
  (MeasureAlgebra.mk ? (l0Le a.val b.val I l0Le b.val c.val) _)
  (MeasureAlgebra.mk ? (l0Le a.val c.val) _)
  refine (MeasureAlgebra.le_mk ?).mpr ?_
  have : (l0Le a.val b.val I l0Le b.val c.val) \ l0Le a.val c.val = {} := by
  ext x
  simp only [mem_empty_iff_false, mem_sdiff, mem_inter_iff, l0Le]
  exact iff_false_intro fun <<hab, hbc>, hn> => hn (Set.Subset.trans hab hbc)
  simpa [this] using measure_empty

theorem L0.le_le_refl_measure (? : Measure X) [IsFiniteMeasure ?] [Countable Y]
  (a b : L0Measure ? Y) :
  L0.le_measure ? a b <= L0.le_measure ? a a sqcap L0.le_measure ? b b := by
  refine Quotient.inductionOn_2 a b fun a b => ?_
  simp only [L0.le_measure, Quotient.lift_2_mk]
  rw [MeasureAlgebra.inf_mk]
  have hle : l0Le a.val a.val I l0Le b.val b.val = Set.univ := by
  rw [l0Le_refl, l0Le_refl, inter_self]
  refine (MeasureAlgebra.le_mk ?).mpr ?_
  have : l0Le a.val b.val \ (l0Le a.val a.val I l0Le b.val b.val) = {} := by
  rw [hle]
  exact sdiff_eq_empty.2 (subset_univ _)
  simpa [this] using measure_empty

/-- Lemma 38 on `MeasureAlgebra`: `L?` is an `A(X)`-poset. -/
noncomputable def l0Poset_measure (? : Measure X) [IsFiniteMeasure ?] [Countable Y] :
  APoset (A := MeasureAlgebra ?) (L0Measure ? Y) where
  le := L0.le_measure ?
  trans := L0.le_trans_measure ?
  le_le_refl := L0.le_le_refl_measure ?

theorem lemma_38_measure (? : Measure X) [IsFiniteMeasure ?] [Countable Y] :
  (l0Poset_measure (Y := Y) ?).le = L0.le_measure ? /\
  (forall a b c, (l0Poset_measure (Y := Y) ?).le a b sqcap
    (l0Poset_measure (Y := Y) ?).le b c <=
    (l0Poset_measure (Y := Y) ?).le a c) /\
  (forall a b, (l0Poset_measure (Y := Y) ?).le a b <=
    (l0Poset_measure (Y := Y) ?).le a a sqcap
    (l0Poset_measure (Y := Y) ?).le b b) :=
  <rfl, L0.le_trans_measure ?, L0.le_le_refl_measure ?>

theorem G_pre_aeEq_measure (? : Measure X) {a b : L0Fun X Y}
  (h : l0AE_measure ? a b) (y : Y) :
  ? (symmDiff (G_pre a.val y) (G_pre b.val y)) = 0 := by
  have hsub : symmDiff (G_pre a.val y) (G_pre b.val y) subseteq (l0Eq a.val b.val)? := by
  intro x hx
  simp only [mem_compl_iff, l0Eq]
  intro heq
  simp only [G_pre, posBasic, mem_symmDiff, mem_preimage, mem_setOf] at hx
  rw [heq] at hx
  exact hx.elim (fun h => h.2 h.1) (fun h => h.2 h.1)
  exact measure_mono_null hsub h

/-- Equation (4) on `MeasureAlgebra`: `G_X([a])(y) = [a^-1(B_y)]`. -/
noncomputable def G_X_measure (? : Measure X) [Countable Y] (a : L0Measure ? Y) :

```

```

    ASubset (MeasureAlgebra ?) Y :=
    Quotient.lift
      (fun a y => MeasureAlgebra.mk ? (G_pre a.val y) (a.property y))

Lean 4 source (lines 2001–2400)

    (fun a b h => funext fun y =>
      (MeasureAlgebra.mk_eq_iff ?).mpr (G_pre_aeEq_measure ? h y)) a

theorem G_X_measure_mk (? : Measure X) [Countable Y] (a : LOFun X Y) (y : Y) :
  G_X_measure ? (LO.mk_measure ? a) y =
    MeasureAlgebra.mk ? (G_pre a.val y) (a.property y) :=
  rfl

/-- Lemma 41 on `MeasureAlgebra`: `G_X([K_S]) = S`. -/
theorem lemma_41_measure (? : Measure X) [IsFiniteMeasure ?] [Countable Y]
  (S : Set Y) :
  G_X_measure ? (LO.mk_measure ?
    <constRV (X := X) S, constRV_isLO (X := X) S>) =
    checkSet (A := MeasureAlgebra ?) S := by
  let a : LOFun X Y := <constRV (X := X) S, constRV_isLO (X := X) S>
  change G_X_measure ? (LO.mk_measure ? a) = checkSet (A := MeasureAlgebra ?) S
  funext y
  rw [G_X_measure_mk]
  by_cases hy : y in S
  * have hpre : G_pre a.val y = Set.univ := by
    ext x
    simp [G_pre, posBasic, show a.val x = S from rfl, hy]
    refine (MeasureAlgebra.mk_congr (ht := MeasurableSet.univ) ? hpre).trans ?_
    rw [MeasureAlgebra.mk_top, checkSet_mem hy]
  * have hpre : G_pre a.val y = ({ } : Set X) := by
    ext x
    simp [G_pre, posBasic, show a.val x = S from rfl, hy]
    refine (MeasureAlgebra.mk_congr (ht := MeasurableSet.empty) ? hpre).trans ?_
    rw [MeasureAlgebra.mk_bot, checkSet_not_mem hy]

theorem G_X_measure_le (? : Measure X) [IsFiniteMeasure ?] [Countable Y]
  (a b : LOMeasure ? Y) :
  subsetB (G_X_measure ? a) (G_X_measure ? b) = LO.le_measure ? a b := by
  refine Quotient.inductionOn_2 a b fun a b => ?_
  unfold subsetB
  simp only [G_X_measure, LO.le_measure, LO.mk_measure, Quotient.lift_mk,
    Quotient.lift_2_mk]
  have : (? y, MeasureAlgebra.mk ? (G_pre a.val y) (a.property y) ?
    MeasureAlgebra.mk ? (G_pre b.val y) (b.property y)) =
    MeasureAlgebra.mk ? (? y, (G_pre a.val y)? U G_pre b.val y)
    (MeasurableSet.iInter fun y =>
      (a.property y).compl.union (b.property y)) := by
  rw [ <- MeasureAlgebra.iInf_mk ? (fun y => (G_pre a.val y)? U G_pre b.val y)
    (fun y => (a.property y).compl.union (b.property y))]
  congr 1
  ext y
  exact MeasureAlgebra.himp_mk ? (G_pre a.val y) (G_pre b.val y)
    (a.property y) (b.property y)
  refine this.trans (MeasureAlgebra.mk_congr ? ?_)
  exact (LO.le_eq_iInter a.val b.val).symm

/-- Inverse of `G_X_measure`: `a(x) = {y | x in out(b y)}`. The `MeasureAlgebra`
representative is already measurable, so `measRep` is not used. -/
noncomputable def G_X_measure_inv (? : Measure X)
  (b : ASubset (MeasureAlgebra ?) Y) : LOFun X Y :=
  <fun x => {y | x in (Quotient.out (b y)).val}, fun y => by
    convert (Quotient.out (b y)).property
  ext x

```

```

simp [posBasic]>

theorem G_X_measure_inv_right (? : Measure X) [Countable Y]
  (b : ASubset (MeasureAlgebra ?) Y) :
  G_X_measure ? (L0.mk_measure ? (G_X_measure_inv ? b)) = b := by
  funext y
  have hpre : G_pre (G_X_measure_inv ? b).val y = (Quotient.out (b y)).val := by
    ext x
    simp [G_pre, posBasic, G_X_measure_inv]
  rw [G_X_measure_mk]
  exact (MeasureAlgebra.mk_congr ? hpre).trans (MeasureAlgebra.mk_out ? (b y))

theorem G_X_measure_inv_left (? : Measure X) [Countable Y] (a : L0Measure ? Y) :
  L0.mk_measure ? (G_X_measure_inv ? (G_X_measure ? a)) = a := by
  refine Quotient.inductionOn a fun a => Quotient.sound ?_
  change l0AE_measure ? (G_X_measure_inv ? (G_X_measure ? (L0.mk_measure ? a))) a
  unfold l0AE_measure
  let a' := (G_X_measure_inv ? (G_X_measure ? (L0.mk_measure ? a))).val
  have hy : forall y, ? (symmDiff
    (Quotient.out (MeasureAlgebra.mk ? (G_pre a.val y) (a.property y))).val
    (G_pre a.val y)) = 0 := fun y =>
    MeasureAlgebra.out_ae ? (a.property y)
  have hsub : (l0Eq a' a.val)? subseTEq
    ? y, symmDiff
    (Quotient.out (MeasureAlgebra.mk ? (G_pre a.val y) (a.property y))).val
    (G_pre a.val y) := by
    intro x hx
    have hne : a' x != a.val x := by
      simp [l0Eq] using hx
    obtain <y, hyx> : exists y, not (y in a' x <-> y in a.val x) :=
      not_forall.mp (mt Set.ext hne)
    refine mem_iUnion.mpr <y, ?_>
    have hab : y in a' x <->
      x in (Quotient.out (G_X_measure ? (L0.mk_measure ? a) y)).val := by
      simp [a', G_X_measure_inv]
    have hab' : y in a' x <->
      x in (Quotient.out
        (MeasureAlgebra.mk ? (G_pre a.val y) (a.property y))).val := by
      rwa [G_X_measure_mk] at hab
    have hyx' : not (x in (Quotient.out
      (MeasureAlgebra.mk ? (G_pre a.val y) (a.property y))).val <->
      y in a.val x) := by
      rwa [← hab']
    have hG : x in G_pre a.val y <-> y in a.val x := by
      simp [G_pre, posBasic]
    rw [mem_symmDiff]
    by_cases hP : x in (Quotient.out
      (MeasureAlgebra.mk ? (G_pre a.val y) (a.property y))).val
    * exact Or.inl <hP, fun hQ => hyx' (iff_of_true hP (hG.mp hQ))>
    * refine Or.inr <?_, hP>
      by_contra hQ
      exact hyx' (iff_of_false hP (fun hmem => hQ (hG.mpr hmem)))
  exact measure_mono_null hsub (measure_iUnion_null hy)

/-- Proposition 39 on `MeasureAlgebra`: `G_X` is a strict `A(X)`-poset iso. -/
noncomputable def proposition_39_measure (? : Measure X) [IsFiniteMeasure ?]
  [Countable Y] :
  APoset.StrictIso (l0Poset_measure (Y := Y) ?)
  (powerPoset (A := MeasureAlgebra ?) (X := Y)) where
  toFun := G_X_measure ?
  invFun := fun b => L0.mk_measure ? (G_X_measure_inv ? b)
  left_inv := G_X_measure_inv_left ?
  right_inv := G_X_measure_inv_right ?

```

```

preserve_le := fun a b => by
  change subsetB (G_X_measure ? a) (G_X_measure ? b) = L0.le_measure ? a b
  exact G_X_measure_le ? a b

theorem l0App_ae_measure [DecidableEq E] [Countable E] (? : Measure X)
  (pair : Finset E x E -> E) {a a' b b' : L0Fun X E}
  (ha : l0AE_measure ? a a') (hb : l0AE_measure ? b b') :
  l0AE_measure ? <l0App pair a.val b.val, l0App_isL0 pair a.property b.property>
  <l0App pair a'.val b'.val, l0App_isL0 pair a'.property b'.property> := by
  have hsub : (l0Eq (l0App pair a.val b.val) (l0App pair a'.val b'.val)) ? subseteq
    (l0Eq a.val a'.val) ? U (l0Eq b.val b'.val) ? := by
    intro x hx
    simp only [mem_union, mem_compl_iff, l0Eq, l0App] at hx |-
    exact not_and_or.mp fun <haeq, hbeq> => hx (by
      change a.val x = a'.val x at haeq
      change b.val x = b'.val x at hbeq
      change l0App pair a.val b.val x = l0App pair a'.val b'.val x
      simp only [l0App]
      rw [haeq, hbeq])
  exact measure_mono_null hsub (measure_union_null ha hb)

noncomputable def L0.app_measure [DecidableEq E] [Countable E] (? : Measure X)
  (pair : Finset E x E -> E) (a b : L0Measure ? E) : L0Measure ? E :=
  Quotient.lift_2
  (fun a b => L0.mk_measure ?
    <l0App pair a.val b.val, l0App_isL0 pair a.property b.property>)
  (fun a b a' b' ha hb => by
    refine Quotient.sound ?_
    exact l0App_ae_measure ? pair ha hb) a b

theorem L0.app_measure_mk [DecidableEq E] [Countable E] (? : Measure X)
  (pair : Finset E x E -> E) (a b : L0Fun X E) :
  L0.app_measure ? pair (L0.mk_measure ? a) (L0.mk_measure ? b) =
  L0.mk_measure ? <l0App pair a.val b.val,
    l0App_isL0 pair a.property b.property> :=
  rfl

/-- Proposition 40 on `MeasureAlgebra`: `G_X` is an application homomorphism. -/
theorem proposition_40_measure [DecidableEq E] [Countable E] (? : Measure X)
  [IsFiniteMeasure ?] (pair : Finset E x E -> E) (a b : L0Measure ? E) :
  G_X_measure ? (L0.app_measure ? pair a b) =
  engelerAppA pair (G_X_measure ? a) (G_X_measure ? b) := by
  refine Quotient.inductionOn_2 a b fun a b => ?_
  funext q
  have happ :
    L0.app_measure ? pair (Quotient.mk (l0Setoid_measure ? E) a)
    (Quotient.mk (l0Setoid_measure ? E) b) =
    L0.mk_measure ? <l0App pair a.val b.val,
      l0App_isL0 pair a.property b.property> :=
    rfl
  rw [happ]
  have hG : G_X_measure ? (L0.mk_measure ?
    <l0App pair a.val b.val, l0App_isL0 pair a.property b.property>) q =
    MeasureAlgebra.mk ? (G_pre (l0App pair a.val b.val) q)
    (l0App_isL0 pair a.property b.property q) :=
    rfl
  rw [hG]
  have hpre : G_pre (l0App pair a.val b.val) q =
    ? K : Finset E, G_pre a.val (pair (K, q)) I ? k in K, G_pre b.val k :=
    G_pre_l0App pair a.val b.val q
  let hsU : MeasurableSet
    (? K : Finset E, G_pre a.val (pair (K, q)) I ? k in K, G_pre b.val k) :=
    MeasurableSet.iUnion fun K =>

```

```

(a.property (pair (K, q))).inter
  (Finset.measurableSet_biInter K fun k _ => b.property k)
refine (MeasureAlgebra.mk_congr (ht := hsU) ? hpre).trans ?_
haveI : Countable (Finset E) := inferInstance
have hunion :
  MeasureAlgebra.mk ?
    (? K : Finset E,
      G_pre a.val (pair (K, q)) I ? k in K, G_pre b.val k) hsU =
    bigcup K : Finset E,
    MeasureAlgebra.mk ?
      (G_pre a.val (pair (K, q)) I ? k in K, G_pre b.val k)
      ((a.property (pair (K, q))).inter
        (Finset.measurableSet_biInter K fun k _ => b.property k)) :=
    (MeasureAlgebra.iSup_mk ?
      (fun K : Finset E =>
        G_pre a.val (pair (K, q)) I ? k in K, G_pre b.val k)
      (fun K => (a.property (pair (K, q))).inter
        (Finset.measurableSet_biInter K fun k _ => b.property k))))).symm
refine hunion.trans ?_
refine iSup_congr fun K => ?_
have haG : G_X_measure ? (Quotient.mk (l0Setoid_measure ? E) a) (pair (K, q)) =
  MeasureAlgebra.mk ? (G_pre a.val (pair (K, q)))
  (a.property (pair (K, q))) := rfl
have hbG : forall k, G_X_measure ? (Quotient.mk (l0Setoid_measure ? E) b) k =
  MeasureAlgebra.mk ? (G_pre b.val k) (b.property k) := fun _ => rfl
simp_rw [haG, hbG]
rw [MeasureAlgebra.iInf_mk_finset ? K (fun k => G_pre b.val k)
  (fun k => b.property k)]
exact (MeasureAlgebra.iInf_mk ? (G_pre a.val (pair (K, q)))
  (? k in K, G_pre b.val k) (a.property (pair (K, q)))
  (Finset.measurableSet_biInter K fun k _ => b.property k)).symm

/-- Proposition 44 records that `L?` is typically *not* a continuous dcpo
externally; the paper proves this when the associated algebra is non-atomic. -/
def IsAtomic (A : Type*) [CompleteBooleanAlgebra A] : Prop :=
  forall a : A, a != False -> exists b : A, IsAtom b /\ b <= a

/-!
## Complete lattice structure on `L?` along `G_X`, and Proposition 44
-/

/-- `G_X` as a type equivalence (Proposition 39). -/
noncomputable def L0.equivPower (N : NegligibilitySpace X) [Countable Y] :
  L0 N Y ? ASubset (AssociatedAlgebra N) Y where
  toFun := G_X N
  invFun := fun b => L0.mk N (G_X_inv N b)
  left_inv := G_X_inv_left N
  right_inv := G_X_inv_right N

theorem G_X_equiv (N : NegligibilitySpace X) [Countable Y] (a : L0 N Y) :
  G_X N a = L0.equivPower (Y := Y) N a :=
  rfl

theorem G_X_symm (N : NegligibilitySpace X) [Countable Y]
  (b : ASubset (AssociatedAlgebra N) Y) :
  G_X N ((L0.equivPower (Y := Y) N).symm b) = b := by
  rw [G_X_equiv]
  exact Equiv.apply_symm_apply _ _

/-- Order on `L?` transported along `G_X`. -/
noncomputable instance instPartialOrderL0
  {X Y : Type*} [MeasurableSpace X] (N : NegligibilitySpace X) [Countable Y] :
  PartialOrder (L0 N Y) where

```

```

le a b := G_X N a <= G_X N b
le_refl _ := le_refl
le_trans _ _ _ := le_trans
le_antisymm a b hab hba :=
  (LO.equivPower (Y := Y) N).injective (le_antisymm hab hba)

noncomputable instance instSupSetLO
  {X Y : Type*} [MeasurableSpace X] (N : NegligibilitySpace X) [Countable Y] :
  SupSet (LO N Y) where
  sSup S := (LO.equivPower (Y := Y) N).symm (sSup (G_X N '' S))

/-- External complete lattice on `L?`, transported along `G_X`. -/
noncomputable instance instCompleteLatticeLO
  {X Y : Type*} [MeasurableSpace X] (N : NegligibilitySpace X) [Countable Y] :
  CompleteLattice (LO N Y) :=
  completeLatticeOfSup (LO N Y) fun S => by
    constructor
    * intro a ha
      change G_X N a <= G_X N ((LO.equivPower (Y := Y) N).symm (sSup (G_X N '' S)))
      rw [G_X_symm]
      exact le_sSup (mem_image_of_mem (G_X N) ha)
    * intro b hb
      change G_X N ((LO.equivPower (Y := Y) N).symm (sSup (G_X N '' S))) <= G_X N b
      rw [G_X_symm]
      exact sSup_le fun x hx => by
        obtain <a, ha, rfl> := (mem_image _ _ _).1 hx
        exact hb ha

theorem LO.le_iff_G_X (N : NegligibilitySpace X) [Countable Y] (a b : LO N Y) :
  a <= b <-> G_X N a <= G_X N b :=
  Iff.rfl

theorem LO.le_iff_pointwise (N : NegligibilitySpace X) [Countable Y] (a b : LO N Y) :
  a <= b <-> forall y, G_X N a y <= G_X N b y :=
  Iff.rfl

theorem G_X_sSup {X Y : Type*} [MeasurableSpace X] [Countable Y]
  (N : NegligibilitySpace X) (S : Set (LO N Y)) :
  G_X N (sSup S) = sSup (G_X N '' S) := by
  change G_X N ((LO.equivPower (Y := Y) N).symm (sSup (G_X N '' S))) =
  sSup (G_X N '' S)
  exact G_X_symm N _

theorem G_X_bot {X Y : Type*} [MeasurableSpace X] [Countable Y]
  (N : NegligibilitySpace X) :
  G_X N (False : LO N Y) = (False : ASubset (AssociatedAlgebra N) Y) := by
  change G_X N (sSup ({}) : Set (LO N Y)) = False
  rw [G_X_sSup, image_empty, sSup_empty]

theorem LO.eq_bot_iff_G_X {X Y : Type*} [MeasurableSpace X] [Countable Y]
  (N : NegligibilitySpace X) (a : LO N Y) :
  a = False <-> G_X N a = (False : ASubset (AssociatedAlgebra N) Y) := by
  constructor
  * intro h; rw [h]; exact G_X_bot N
  * intro h
    apply (LO.equivPower (Y := Y) N).injective
    rw [← G_X_equiv, ← G_X_equiv, h, G_X_bot]

theorem wayBelow_bot {D : Type*} [CompleteLattice D] (d : D) : (False : D) << d := by
  intro S hne_hdir_hle
  obtain <s, hs> := hne
  exact <s, hs, bot_le>

```



```

theorem exists_pos_atomless_of_not_isAtomic {A : Type*} [CompleteBooleanAlgebra A]
  (h : not IsAtomic A) :
  exists a : A, a != False /\ forall b, IsAtom b -> not b <= a := by
  let p := sSup {a : A | IsAtom a}
  have hp : p != top := by
    intro htop
    refine h fun a ha => ?_
    have ha' : a = sSup ((fun b : A => a sqcap b) '' {b | IsAtom b}) := by
      calc
        a = a sqcap top := (inf_top_eq a).symm
        _ = a sqcap sSup {b | IsAtom b} := by rw [ <- htop]
        _ = bigcup b in {b | IsAtom b}, a sqcap b := inf_sSup_eq
        _ = sSup ((fun b => a sqcap b) '' {b | IsAtom b}) := sSup_image.symm
    have hex : exists b, IsAtom b /\ a sqcap b != False := by
      by_contra hempty
      push_neg at hempty
      have hbot : sSup ((fun b : A => a sqcap b) '' {b | IsAtom b}) = False :=
        sSup_eq_bot.mpr fun d hd => by
          obtain <b, hb, rfl> := hd
          exact hempty b hb
      exact ha (ha'.trans hbot)
    obtain <b, hb, hne> := hex
  have heq : a sqcap b = b := by
    rcases lt_or_eq_of_le (inf_le_right (a := a) (b := b)) with hlt | heq
    * exact False.elim (hne (hb.2 (a sqcap b) hlt))
    * exact heq
  exact <b, hb, (inf_eq_right (a := a) (b := b)).mp heq>
  refine <p?, mt compl_eq_bot.mp hp, fun b hb hle => ?_>
  have hmem : b in {a : A | IsAtom a} := hb
  have hbot : b <= False :=
    (le_inf (le_sSup hmem) hle).trans_eq inf_compl_eq_bot
  exact hb.1 (le_bot_iff.mp hbot)

theorem exists_lt_atomless {A : Type*} [CompleteBooleanAlgebra A] {a : A}
  (hne : a != False) (hna : forall b, IsAtom b -> not b <= a) :
  exists c : A, c != False /\ c < a /\ forall b, IsAtom b -> not b <= c := by
  have hnot : not IsAtom a := fun ha => hna a ha le_rfl
  obtain <c, hc, hcne> : exists c, c < a /\ c != False := by
    by_contra h
    push_neg at h
    exact hnot <hne, fun c hc => h c hc>
  exact <c, hcne, hc, fun b hb hle => hna b hb (hle.trans hc.le)>

noncomputable def atomlessSeqAux {A : Type*} [CompleteBooleanAlgebra A] {a : A}
  (hne : a != False) (hna : forall b, IsAtom b -> not b <= a) :
  Nat -> Sigma' x : A, x != False /\ (forall b, IsAtom b -> not b <= x)
  | 0 =>
    let h := Classical.choose_spec (exists_lt_atomless hne hna)
    <Classical.choose (exists_lt_atomless hne hna), h.1, h.2.2>
  | n + 1 =>
    let prev := atomlessSeqAux hne hna n
    let hex := exists_lt_atomless prev.2.1 prev.2.2
    let h := Classical.choose_spec hex
    <Classical.choose hex, h.1, h.2.2>

noncomputable def atomlessSeq {A : Type*} [CompleteBooleanAlgebra A] {a : A}
  (hne : a != False) (hna : forall b, IsAtom b -> not b <= a) : Nat -> A :=
  fun n => (atomlessSeqAux hne hna n).1

theorem atomlessSeq_ne {A : Type*} [CompleteBooleanAlgebra A] {a : A}
  (hne : a != False) (hna : forall b, IsAtom b -> not b <= a) (n : Nat) :
  atomlessSeq hne hna n != False :=
  (atomlessSeqAux hne hna n).2.1

```

```

theorem atomlessSeq_atomless {A : Type*} [CompleteBooleanAlgebra A] {a : A}
  (hne : a != False) (hna : forall b, IsAtom b -> not b <= a) (n : Nat) :
  forall b, IsAtom b -> not b <= atomlessSeq hne hna n :=
  (atomlessSeqAux hne hna n).2.2

theorem atomlessSeq_succ_lt {A : Type*} [CompleteBooleanAlgebra A] {a : A}
  (hne : a != False) (hna : forall b, IsAtom b -> not b <= a) (n : Nat) :
  atomlessSeq hne hna (n + 1) < atomlessSeq hne hna n := by
  change (atomlessSeqAux hne hna (n + 1)).1 < (atomlessSeqAux hne hna n).1
  let prev := atomlessSeqAux hne hna n
  exact (Classical.choose_spec (exists_lt_atomless prev.2.1 prev.2.2)).2.1

theorem atomlessSeq_antitone {A : Type*} [CompleteBooleanAlgebra A] {a : A}
  (hne : a != False) (hna : forall b, IsAtom b -> not b <= a) :
  Antitone (atomlessSeq hne hna) :=
  antitone_nat_of_succ_le fun n => (atomlessSeq_succ_lt hne hna n).le

noncomputable def meetlessSeq {A : Type*} [CompleteBooleanAlgebra A] (f : Nat -> A) : Nat ->
  A :=
  fun n => f n sqcap (? k, f k)?

theorem meetlessSeq_iInf_bot {A : Type*} [CompleteBooleanAlgebra A] (f : Nat -> A) :
  ? n, meetlessSeq f n = False := by
  refine le_bot_iff.mp ?_
  have hle : ? n, meetlessSeq f n <= (? n, f n) sqcap (? k, f k)? :=
  le_inf (iInf_mono fun n => inf_le_left) (iInf_le_of_le 0 inf_le_right)
  exact hle.trans_eq inf_compl_eq_bot

```

Lean 4 source (lines 2401–2800)

```

theorem meetlessSeq_succ_lt {A : Type*} [CompleteBooleanAlgebra A] {f : Nat -> A}
  (hstrict : forall n, f (n + 1) < f n) (n : Nat) :
  meetlessSeq f (n + 1) < meetlessSeq f n := by
  set m := ? k, f k
  refine lt_of_le_of_ne (inf_le_inf_right m? (hstrict n).le) ?_
  intro heq
  have hcalc : (f n sqcap m?) sqcap (f (n + 1) sqcap m?)? = f n sqcap (f (n + 1))?
  sqcap m? := by
  rw [compl_inf, compl_compl, inf_sup_left]
  have hz : f n sqcap m? sqcap m = False := by
  rw [inf_assoc, inf_comm (a := m?), inf_compl_eq_bot, inf_bot_eq]
  rw [hz, sup_bot_eq]
  ac_rfl
  have hbot : f n sqcap (f (n + 1))? sqcap m? = False := by
  have : (f n sqcap m?) sqcap (f (n + 1) sqcap m?)? = False := by
  change meetlessSeq f n sqcap (meetlessSeq f (n + 1))? = False
  rw [heq, inf_compl_eq_bot]
  rwa [← hcalc]
  have hle : f n sqcap (f (n + 1))? <= m :=
  (disjoint_compl_right_iff (x := f n sqcap (f (n + 1))?) (y := m)).mp
  (disjoint_iff.mpr hbot)
  have hz : f n sqcap (f (n + 1))? = False :=
  le_bot_iff.mp ((le_inf (hle.trans (iInf_le f (n + 1))) inf_le_right).trans_eq
  inf_compl_eq_bot)
  exact (hstrict n).not_ge
  ((disjoint_compl_right_iff (x := f n) (y := f (n + 1))).mp (disjoint_iff.mpr hz))

theorem meetlessSeq_ne {A : Type*} [CompleteBooleanAlgebra A] {f : Nat -> A}
  (hstrict : forall n, f (n + 1) < f n) (n : Nat) : meetlessSeq f n != False := by
  intro hbot
  have : f n <= ? k, f k :=
  (disjoint_compl_right_iff (x := f n) (y := ? k, f k)).mp

```

```

    (disjoint_iff.mpr (by simpa [meetlessSeq] using hbot))
  exact (hstrict n).not_ge (this.trans (iInf_le f (n + 1)))

theorem atomlessSeq_lt {A : Type*} [CompleteBooleanAlgebra A] {a : A}
  (hne : a != False) (hna : forall b, IsAtom b -> not b <= a) (n : Nat) :
  atomlessSeq hne hna n < a := by
  induction n with
  | zero => exact (Classical.choose_spec (exists_lt_atomless hne hna)).2.1
  | succ n ih => exact (atomlessSeq_succ_lt hne hna n).trans ih

theorem directedOn_range_monotone {a : Type*} [Preorder a] {f : Nat -> a}
  (hf : Monotone f) : DirectedOn (* <= *) (Set.range f) := by
  intro x hx y hy
  obtain <i, rfl> := hx
  obtain <j, rfl> := hy
  exact <f (max i j), <max i j, rfl>, hf (le_max_left i j), hf (le_max_right i j)>

/-- If `A` is not atomic and `Y` is nonempty, then `Y -> A` is not a
continuous lattice. Constant functions are the paper's indicator RVs
after transport along `G_X`. -/
theorem not_isContinuousLattice_fun_of_not_atomic
  {A Y : Type*} [CompleteBooleanAlgebra A] [Nonempty Y]
  (hA : not IsAtomic A) : not IsContinuousLattice (Y -> A) := by
  obtain <u, hu, hna> := exists_pos_atomless_of_not_isAtomic hA
  let b : Y -> A := fun _ => u
  have hb_ne : b != False := by
    intro h
    exact hu (by simpa [Pi.bot_apply] using congrFun h (Classical.arbitrary Y))
  have honly : forall e : Y -> A, e << b -> e = False := by
    intro e he
    by_contra hene
    have hele : e <= b := wayBelow_le he
    have ht_ne : bigcup y, e y != False := by
      intro hbot
      exact hene (funext fun y =>
        le_bot_iff.mp ((le_iSup e y).trans_eq hbot))
    have ht_le : bigcup y, e y <= u := iSup_le fun y => hele y
    let t := bigcup y, e y
    have ht_na : forall c, IsAtom c -> not c <= t :=
      fun c hc hc_le => hna c hc (hc_le.trans ht_le)
    let f := atomlessSeq ht_ne ht_na
    have hf_lt : forall n, f (n + 1) < f n := atomlessSeq_succ_lt ht_ne ht_na
    let w := meetlessSeq f
    have hw_lt : forall n, w (n + 1) < w n := meetlessSeq_succ_lt hf_lt
    have hw_ne : forall n, w n != False := meetlessSeq_ne hf_lt
    have hw_le : forall n, w n <= t := fun n =>
      inf_le_left.trans (atomlessSeq_lt ht_ne ht_na n).le
    let c : Nat -> (Y -> A) := fun n _ => t sqcap (w n)? sqsup u sqcap t?
    have hc_mono : Monotone c := by
      intro i j hij y
      refine sup_le_sup ?_ le_rfl
      exact inf_le_inf_left t (compl_le_compl
        ((antitone_nat_of_succ_le fun n => (hw_lt n).le) hij))
    have hc_sup : sSup (Set.range c) = b := by
      funext y
      have : sSup (Set.range c) y = bigcup n, c n y := by
        rw [sSup_range, iSup_apply]
      rw [this]
      have hdist :
        bigcup n, t sqcap (w n)? sqsup u sqcap t? = (bigcup n, t sqcap (w n)?)
      sqsup u sqcap t? := by
        rw [← iSup_sup]

```

```

    rw [hdist, <- inf_iSup_eq, <- compl_iInf, meetlessSeq_iInf_bot, compl_bot,
        inf_top_eq, sup_inf_left, sup_compl_eq_top, inf_top_eq]
    exact sup_eq_right.mpr ht_le
  have hmeet (n : Nat) : t sqcap (t sqcap (w n)? sqsup u sqcap t)? = w n := by
    rw [compl_sup, compl_inf, compl_inf, compl_compl, compl_compl]
    have htw : t sqcap (t? sqsup w n) = t sqcap w n := by
      rw [inf_sup_left, inf_compl_eq_bot, bot_sup_eq]
    rw [ <- inf_assoc, htw, inf_sup_left]
    have htu : t sqcap u? = False :=
      disjoint_iff.mp ((disjoint_compl_right_iff (x := t) (y := u)).mpr ht_le)
    have hz : t sqcap w n sqcap u? = False :=
      le_bot_iff.mp ((inf_le_inf_right u? inf_le_left).trans_eq htu)
    have hidem : t sqcap w n sqcap t = t sqcap w n := by
      calc
        t sqcap w n sqcap t = t sqcap t sqcap w n := by ac_rfl
        _ = t sqcap w n := by rw [inf_idem]
    rw [hz, bot_sup_eq, hidem, inf_eq_right.mpr (hw_le n)]
  have he_nle : forall n, not e <= c n := by
    intro n hle
    have ht_nle : t <= t sqcap (w n)? sqsup u sqcap t? :=
      iSup_le fun y => hle y
    have hne' : t sqcap (t sqcap (w n)? sqsup u sqcap t)? != False := by
      rw [hmeet n]
      exact hw_ne n
    have hbot : t sqcap (t sqcap (w n)? sqsup u sqcap t)? = False :=
      disjoint_iff.mp ((disjoint_compl_right_iff
        (x := t) (y := t sqcap (w n)? sqsup u sqcap t?)).mpr ht_nle)
    exact hne' hbot
  obtain <z, hz, hez> := he (S := Set.range c)
  <c 0, Set.mem_range_self 0> (directedOn_range_monotone hc_mono)
  (le_of_eq hc_sup.symm)
  obtain <n, rfl> := hz
  exact he_nle n hez
intro hcont
have hsup := (hcont b).2
have hset : {e : Y -> A | e << b} = {False} := by
  ext e
  constructor
  * exact honly e
  * intro he
    rw [mem_singleton_iff.mp he]
    exact wayBelow_bot b
rw [hset, sSup_singleton] at hsup
exact hb_ne hsup

theorem L0.le_symm {X Y : Type*} [MeasurableSpace X] [Countable Y]
  (N : NegligibilitySpace X) {x y : ASubset (AssociatedAlgebra N) Y} :
  (L0.equivPower (Y := Y) N).symm x <= (L0.equivPower (Y := Y) N).symm y <->
  x <= y := by
  change G_X N ((L0.equivPower (Y := Y) N).symm x) <=
    G_X N ((L0.equivPower (Y := Y) N).symm y) <-> x <= y
  rw [G_X_symm, G_X_symm]

theorem G_X_image_symm {X Y : Type*} [MeasurableSpace X] [Countable Y]
  (N : NegligibilitySpace X) (S : Set (ASubset (AssociatedAlgebra N) Y)) :
  G_X N '' ((L0.equivPower (Y := Y) N).symm '' S) = S := by
  ext x
  constructor
  * rintro <y, <z, hz, rfl>, rfl>
    rwa [G_X_symm]
  * intro hx
    exact <(L0.equivPower (Y := Y) N).symm x, <x, hx, rfl>, G_X_symm N x>

```

```

theorem wayBelow_iff_G_X {X Y : Type*} [MeasurableSpace X] [Countable Y]
  (N : NegligibilitySpace X) (a b : L0 N Y) :
  a << b <-> G_X N a << G_X N b := by
  constructor
  * intro h S hne hdir hle
    let S' : Set (L0 N Y) := (L0.equivPower (Y := Y) N).symm '' S
    have hne' : S'.Nonempty := hne.image _
    have hdir' : DirectedOn (* <= *) S' := by
      intro x hx y hy
      obtain <sx, hsx, rfl> := hx
      obtain <sy, hsy, rfl> := hy
      obtain <z, hz, hzx, hzy> := hdir sx hsx sy hsy
      exact <(L0.equivPower (Y := Y) N).symm z, <z, hz, rfl>,
        (L0.le_symm N).mpr hzx, (L0.le_symm N).mpr hzy>
    have hle' : b <= sSup S' := by
      change G_X N b <= G_X N (sSup S')
      rw [G_X_sSup, G_X_image_symm]
      exact hle
    obtain <w, hw, haw> := h hne' hdir' hle'
    obtain <z, hz, rfl> := hw
    change G_X N a <= G_X N ((L0.equivPower (Y := Y) N).symm z) at haw
    rw [G_X_symm] at haw
    exact <z, hz, haw>
  * intro h S hne hdir hle
    let S' : Set (ASubset (AssociatedAlgebra N) Y) := G_X N '' S
    have hne' : S'.Nonempty := hne.image _
    have hdir' : DirectedOn (* <= *) S' := by
      intro x hx y hy
      obtain <sx, hsx, rfl> := hx
      obtain <sy, hsy, rfl> := hy
      obtain <z, hz, hzx, hzy> := hdir sx hsx sy hsy
      exact <G_X N z, <z, hz, rfl>, hzx, hzy>
    have hle' : G_X N b <= sSup S' := by
      rwa [← G_X_sSup]
    obtain <w, hw, haw> := h hne' hdir' hle'
    obtain <z, hz, rfl> := hw
    exact <z, hz, haw>

theorem isContinuousLattice_iff_G_X {X Y : Type*} [MeasurableSpace X] [Countable Y]
  (N : NegligibilitySpace X) :
  IsContinuousLattice (L0 N Y) <->
  IsContinuousLattice (ASubset (AssociatedAlgebra N) Y) := by
  constructor
  * intro h d
    let d' := (L0.equivPower (Y := Y) N).symm d
    obtain <hdir, hsup> := h d'
    have himg : G_X N '' {e | e << d'} = {f | f << d} := by
      ext f
      constructor
      * intro hf
        obtain <e, he, rfl> := (mem_image _ _).1 hf
        have : G_X N e << G_X N d' := (wayBelow_iff_G_X N e d').mp he
        rwa [G_X_symm] at this
      * intro hf
        refine <(L0.equivPower (Y := Y) N).symm f, ?_, G_X_symm N f>
        refine (wayBelow_iff_G_X N _ d').mpr ?_
        rwa [G_X_symm, G_X_symm]
    constructor
  * intro x hx y hy
    have hx' : x in G_X N '' {e | e << d'} := by rwa [himg]
    have hy' : y in G_X N '' {e | e << d'} := by rwa [himg]
    obtain <ex, hex, rfl> := (mem_image _ _).1 hx'
    obtain <ey, hey, rfl> := (mem_image _ _).1 hy'

```

```

    obtain <z, hz, hzx, hzy> := hdir ex hex ey hey
    refine <G_X N z, ?_, hzx, hzy>
    exact himg |> <z, hz, rfl>
* calc
  d = G_X N d' := (G_X_symm N d).symm
  _ = G_X N (sSup {e | e << d'}) := congrArg (G_X N) hsup
  _ = sSup (G_X N '' {e | e << d'}) := G_X_sSup N _
  _ = sSup {f | f << d} := by rw [himg]
* intro h d
  obtain <hdir, hsup> := h (G_X N d)
  have himg : (L0.equivPower (Y := Y) N).symm '' {f | f << G_X N d} =
    {e | e << d} := by
    ext e
    constructor
  * intro he
    obtain <f, hf, rfl> := (mem_image _ _).1 he
    exact (wayBelow_iff_G_X N _ d).mpr (by rwa [G_X_symm])
  * intro he
    refine <G_X N e, (wayBelow_iff_G_X N e d).mp he, Equiv.symm_apply_apply _ _>
  constructor
* intro x hx y hy
  have hx' : x in (L0.equivPower (Y := Y) N).symm '' {f | f << G_X N d} := by
    rwa [himg]
  have hy' : y in (L0.equivPower (Y := Y) N).symm '' {f | f << G_X N d} := by
    rwa [himg]
  obtain <fx, hfx, rfl> := (mem_image _ _).1 hx'
  obtain <fy, hfy, rfl> := (mem_image _ _).1 hy'
  obtain <z, hz, hzx, hzy> := hdir fx hfx fy hfy
  refine <(L0.equivPower (Y := Y) N).symm z, ?_,
    (L0.le_symm N).mpr hzx, (L0.le_symm N).mpr hzy>
  exact himg |> <z, hz, rfl>
* apply (L0.equivPower (Y := Y) N).injective
  rw [← G_X_equiv, ← G_X_equiv]
  calc
    G_X N d = sSup {f | f << G_X N d} := hsup
    _ = sSup (G_X N '' ((L0.equivPower (Y := Y) N).symm ''
      {f | f << G_X N d})) :=
      congrArg sSup (G_X_image_symm N {f | f << G_X N d}).symm
    _ = sSup (G_X N '' {e | e << d}) := by rw [himg]
    _ = G_X N (sSup {e | e << d}) := (G_X_sSup N _).symm

/-- Proposition 44: if `A(X)` is not atomic and `Y` is nonempty countable,
then `L?(X; ?(Y))` is not a continuous dcpo. -/
theorem proposition_44 {X Y : Type*} [MeasurableSpace X] [Countable Y] [Nonempty Y]
  (N : NegligibilitySpace X) (hA : not IsAtomic (AssociatedAlgebra N)) :
  not IsContinuousLattice (L0 N Y) :=
  fun h => not_isContinuousLattice_fun_of_not_atomic (Y := Y) hA
  ((isContinuousLattice_iff_G_X (Y := Y) N).mp h)

/-- Paper Proposition 44 wording. On a complete lattice the paper's
?continuous dcpo? is `IsContinuousDcpo` (`IsContinuousLattice`); this
does not claim failure of directed-completeness. -/
theorem proposition_44_dcpo {X Y : Type*} [MeasurableSpace X] [Countable Y]
  [Nonempty Y] (N : NegligibilitySpace X)
  (hA : not IsAtomic (AssociatedAlgebra N)) :
  not IsContinuousDcpo (L0 N Y) :=
  proposition_44 N hA

/-- `G_X` as a type equivalence on the paper algebra `A(X) = Sigma/N(?)`. -/
noncomputable def L0.equivPower_measure (? : Measure X) [Countable Y] :
  L0Measure ? Y ? ASubset (MeasureAlgebra ?) Y where
  toFun := G_X_measure ?
  invFun := fun b => L0.mk_measure ? (G_X_measure_inv ? b)

```

```

left_inv := G_X_measure_inv_left ?
right_inv := G_X_measure_inv_right ?

theorem G_X_measure_symm (? : Measure X) [Countable Y]
  (b : ASubset (MeasureAlgebra ?) Y) :
  G_X_measure ? ((L0.equivPower_measure (Y := Y) ?).symm b) = b :=
  (L0.equivPower_measure (Y := Y) ?).apply_symm_apply b

/-- Order on `L?` transported along `G_X_measure`. -/
noncomputable instance instPartialOrderLOMeasure
  {X Y : Type*} [MeasurableSpace X] (? : Measure X) [IsFiniteMeasure ?]
  [Countable Y] :
  PartialOrder (LOMeasure ? Y) where
  le a b := G_X_measure ? a <= G_X_measure ? b
  le_refl _ := le_refl
  le_trans _ _ _ := le_trans
  le_antisymm a b hab hba :=
    (L0.equivPower_measure (Y := Y) ?).injective (le_antisymm hab hba)

noncomputable instance instSupSetLOMeasure
  {X Y : Type*} [MeasurableSpace X] (? : Measure X) [IsFiniteMeasure ?]
  [Countable Y] :
  SupSet (LOMeasure ? Y) where
  sSup S := (L0.equivPower_measure (Y := Y) ?).symm (sSup (G_X_measure ? ' S))

/-- External complete lattice on paper `L?`, transported along `G_X_measure`. -/
noncomputable instance instCompleteLatticeLOMeasure
  {X Y : Type*} [MeasurableSpace X] (? : Measure X) [IsFiniteMeasure ?]
  [Countable Y] :
  CompleteLattice (LOMeasure ? Y) :=
  completeLatticeOfSup (LOMeasure ? Y) fun S => by
  constructor
  * intro a ha
  change G_X_measure ? a <=
    G_X_measure ? ((L0.equivPower_measure (Y := Y) ?).symm
      (sSup (G_X_measure ? ' S)))
  rw [G_X_measure_symm]
  exact le_sSup (mem_image_of_mem (G_X_measure ?) ha)
  * intro b hb
  change G_X_measure ? ((L0.equivPower_measure (Y := Y) ?).symm
    (sSup (G_X_measure ? ' S))) <= G_X_measure ? b
  rw [G_X_measure_symm]
  exact sSup_le fun x hx => by
    obtain <a, ha, rfl> := (mem_image _ _).1 hx
    exact hb ha

theorem G_X_measure_sSup {X Y : Type*} [MeasurableSpace X] {? : Measure X}
  [IsFiniteMeasure ?] [Countable Y] (S : Set (LOMeasure ? Y)) :
  G_X_measure ? (sSup S) = sSup (G_X_measure ? ' S) :=
  G_X_measure_symm ? _

noncomputable def L0.orderIsoPower_measure (? : Measure X) [IsFiniteMeasure ?]
  [Countable Y] :
  LOMeasure ? Y → ASubset (MeasureAlgebra ?) Y where
  toEquiv := L0.equivPower_measure ?
  map_rel_iff' := Iff.rfl

theorem isLUB_orderIso {A B : Type*} [PartialOrder A] [PartialOrder B]
  (e : A → B) {s : Set A} {a : A} (h : IsLUB s a) :
  IsLUB (e ' s) (e a) := by
  constructor
  * intro x hx
  obtain <y, hy, rfl> := hx

```

```

    exact e.le_iff_le.mpr (h.1 hy)
* intro b hb
  have : a <= e.symm b := h.2 fun y hy => by
    have : e.symm (e y) <= e.symm b :=
      e.symm.le_iff_le.mpr (hb (mem_image_of_mem e hy))
    simpa using this
  exact (e.le_iff_le.mpr this).trans_eq (e.apply_symm_apply b)

theorem orderIso_map_sSup {A B : Type*} [CompleteLattice A] [CompleteLattice B]
  (e : A → B) (s : Set A) : e (sSup s) = sSup (e '' s) :=
  (isLUB_orderIso e (isLUB_sSup s)).unique (isLUB_sSup (e '' s))

theorem wayBelow_map_orderIso {A B : Type*} [CompleteLattice A] [CompleteLattice B]
  (e : A → B) {x y : A} (h : x << y) : e x << e y := by
  intro S hne hdir hle
  let S' : Set A := e.symm '' S
  have hne' : S'.Nonempty := hne.image _
  have hdir' : DirectedOn (* <= *) S' := by
    intro p hp q hq
    obtain <sp, hsp, rfl> := hp
    obtain <sq, hsq, rfl> := hq
    obtain <z, hz, hzp, hzq> := hdir sp hsp sq hsq
    exact <e.symm z, <z, hz, rfl>,
      e.symm.le_iff_le.mpr hzp, e.symm.le_iff_le.mpr hzq>
  have hle' : y <= sSup S' := by
    have : e.symm (e y) <= e.symm (sSup S) := e.symm.le_iff_le.mpr hle
    simpa [orderIso_map_sSup e.symm] using this
  obtain <w, hw, hxw> := h hne' hdir' hle'
  obtain <z, hz, rfl> := hw
  exact <z, hz, (e.le_iff_le.mpr hxw).trans_eq (e.apply_symm_apply z)>

theorem wayBelow_orderIso {A B : Type*} [CompleteLattice A] [CompleteLattice B]
  (e : A → B) {x y : A} : x << y <=> e x << e y :=
  <wayBelow_map_orderIso e, fun h => by
    simpa using wayBelow_map_orderIso e.symm h>

theorem isContinuousLattice_of_orderIso {A B : Type*}
  [CompleteLattice A] [CompleteLattice B]
  (e : A → B) (hB : IsContinuousLattice B) : IsContinuousLattice A := by
  intro a
  obtain <hdir, hsup> := hB (e a)
  have himg : e.symm '' {f | f << e a} = {x | x << a} := by
    ext x
    constructor
    * rintro <f, hf, rfl>
      exact (wayBelow_orderIso e).mpr (by simpa using hf)
    * intro hx
      exact <e x, (wayBelow_orderIso e).mp hx, Equiv.symm_apply_apply _ _>
  constructor
  * intro p hp q hq
    have hp' : p in e.symm '' {f | f << e a} := by rwa [himg]
    have hq' : q in e.symm '' {f | f << e a} := by rwa [himg]
    obtain <fp, hfp, rfl> := (mem_image _ _).1 hp'
    obtain <fq, hfq, rfl> := (mem_image _ _).1 hq'

Lean 4 source (lines 2801–2874)

    obtain <z, hz, hzp, hzq> := hdir fp hfp fq hfq
    refine <e.symm z, ?, e.symm.le_iff_le.mpr hzp, e.symm.le_iff_le.mpr hzq>
    exact himg |> <z, hz, rfl>
  * have := congrArg e.symm hsup
    simpa [orderIso_map_sSup e.symm, himg] using this

theorem isContinuousLattice_iff_orderIso {A B : Type*}

```



```

[CompleteLattice A] [CompleteLattice B] (e : A → B) :
  IsContinuousLattice A <-> IsContinuousLattice B :=
<fun hA => isContinuousLattice_of_orderIso e.symm hA,
  isContinuousLattice_of_orderIso e>

theorem isContinuousLattice_iff_G_X_measure {X Y : Type*} [MeasurableSpace X]
  (? : Measure X) [IsFiniteMeasure ?] [Countable Y] :
  IsContinuousLattice (LOMeasure ? Y) <->
  IsContinuousLattice (ASubset (MeasureAlgebra ?) Y) :=
  isContinuousLattice_iff_orderIso (LO.orderIsoPower_measure (Y := Y) ?)

theorem not_isAtom_mk_of_proper_subset {X : Type*} [MeasurableSpace X]
  {? : Measure X} [IsFiniteMeasure ?] {s t : Set X}
  (hs : MeasurableSet s) (ht : MeasurableSet t)
  (hsub : t ⊆ s) (ht0 : t ≠ ∅) (hlt : t ⊂ s) :
  not IsAtom (MeasureAlgebra.mk ? s hs) := by
  intro hAtom
  let a := MeasureAlgebra.mk ? s hs
  let b := MeasureAlgebra.mk ? t ht
  have hle : b ≤ a :=
    (MeasureAlgebra.le_mk ?).mpr (by
      have : t \ s = ∅ := diff_eq_empty.mpr hsub
      simpa [this] using measure_empty)
  have hne : b ≠ ∅ := fun hb =>
    ht0 ((MeasureAlgebra.mk_eq_bot ?).mp hb)
  have hna : not a ≤ b := by
    intro hab
    have hst : (s \ t) = ∅ := (MeasureAlgebra.le_mk ?).mp hab
    have hadd := measure_inter_add_diff (? := ?) s ht
    have hinter : s ∩ t = t := inter_eq_right.mpr hsub
    rw [hinter, hst, add_zero] at hadd
    exact (ne_of_lt hlt) hadd
  exact hne (hAtom.2 b <hle, hna)

theorem not_isAtomic_measureAlgebra_of_splits {X : Type*} [MeasurableSpace X]
  {? : Measure X} [IsFiniteMeasure ?] (hpos : ? Set.univ ≠ ∅)
  (hsplit : forall ?s : Set X, MeasurableSet s → ? s ≠ ∅ →
    exists t, MeasurableSet t /\ t ⊆ s /\ ? t ≠ ∅ /\ ? t ⊂ s) :
  not IsAtomic (MeasureAlgebra ?) := by
  intro h
  have htop : (top : MeasureAlgebra ?) ≠ ∅ := by
    intro hbot
    have : MeasureAlgebra.mk ? Set.univ MeasurableSet.univ = ∅ := by
      rwa [MeasureAlgebra.mk_top]
    exact hpos ((MeasureAlgebra.mk_eq_bot ?).mp this)
  obtain <b, hb, _> := h top htop
  let s := (Quotient.out b).val
  have hs := (Quotient.out b).property
  have hbm : MeasureAlgebra.mk ? s hs = b := MeasureAlgebra.mk_out ? b
  have hs0 : ? s ≠ ∅ := by
    intro h0
    have : b = ∅ := by
      rw [← hbm, MeasureAlgebra.mk_eq_bot]
    exact h0
  exact hb.1 this
  obtain <t, ht, hsub, ht0, hlt> := hsplit hs hs0
  exact not_isAtom_mk_of_proper_subset hs ht hsub ht0 hlt (by rwa [hbm])

/-- Proposition 44 on the paper algebra `A(X) = Sigma/N(?)`. -/
theorem proposition_44_measure {X Y : Type*} [MeasurableSpace X]
  {? : Measure X} [IsFiniteMeasure ?] [Countable Y] [Nonempty Y]
  (hA : not IsAtomic (MeasureAlgebra ?)) :
  not IsContinuousDcpo (LOMeasure ? Y) :=

```

```

fun h => not_isContinuousLattice_fun_of_not_atomic (Y := Y) hA
  ((isContinuousLattice_iff_G_X_measure (Y := Y) ?).mp h)

end Scott2026

```

A.38 Scott2026/Coin.lean

2033 lines.

Lean 4 source (lines 1–400)

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/

import Mathlib.MeasureTheory.Measure.Prod
import Mathlib.Probability.ProductMeasure
import Mathlib.Probability.Distributions.Bernoulli
import Mathlib.Topology.UnitInterval
import Scott2026.Random
import Scott2026.Prop36
import Scott2026.EngelerVA
import Scott2026.Lemma31

-- Transitive Scott 1972 import via `Prop36` / `Lemma35General` must not
-- override `ENNReal`'s order with `specializationPreorder`.
attribute [-instance] Scott1972.ContinuousLattice.specializationPreorder

/-!
# Coin space (Proposition 42, Theorem 43)

Independent fair coins on  $2^{\mathbb{N}}$ . `coinS1` / `coinS2` are
equation (5):  $S_i(\text{check } n) = [D_{\{i,n,1\}}]$  in
 $\{A(X)\}(\text{check } ?)$  with  $A(X) = \text{coinAlgebra}$ . `proposition_42` is
the raw measure-theoretic Boolean-value-0 core ( $\text{coinMeasure } _ = 0$ ).
`proposition_42_algebra` is the same statement as Boolean value `False`
in `coinAlgebra`: the finite- $K$  clause is a join over `Finset Nat`
(externalization of exists-over-standard-finite-sets); the paper's
 $K$  in  $P_{\text{fin}}\{A\}(\text{check } ?)$  also includes fuzzy `pfinB` names -- that
quantification is a remaining strengthening (no `proposition_42_va`
in this unit). `proposition_42_mk_bot` lifts `agreeSet f` /
`agreeSet_swap f` to `False`.

Borel coin space has  $\text{coinAlgebra} = \Sigma / \mathbb{N}(?)$  ( $\text{MeasureAlgebra}$ 
 $\text{coinMeasure}$ ).  $\text{coinL0}$  /  $G_X\text{coin}$  are the paper  $L?$  /  $G_X$ 
on that algebra. All-sets `NegligibilitySpace.ofMeasure` still needs
`hN` (every set null-measurable) so that `toMeasurable` is an a.e.
representative; `coinNegligibility` is not inhabited at the all-sets
`measurableRep` field. The all-sets lift
`AssociatedAlgebra.mk _ (agreeSet f) = False` remains
`AssociatedAlgebra.ofMeasure_mk_bot` applied to `agreeSet_null`
after `hN`.

Theorem 43 is the external-oracle form: incomparable many-one degrees
via `chiOracle` / `lemma_35_ii` / `proposition_36`. `theorem_43_paper`
is the paper chain: fiberwise Lemma 35(ii) oracles ( $\text{chiOracle}$  on
`bits_i`) mixed as an  $L?$  random variable,  $d_i = G_X\text{measure}$  of that
mix (Boolean-valued graphs of ground `lemma_35_ii`), numeral-mapping
identity, `proposition_42_algebra`, then transport through
 $G_X\text{measure\_inv}$  by Propositions 39-40 and Lemmas 31 and 41.
`theorem_43` is unchanged (same conclusion type).

```

```

-/

open MeasureTheory ProbabilityTheory Set unitInterval
open scoped unitInterval ENNReal NNReal

namespace Scott2026

noncomputable section

abbrev Cantor := Nat -> Bool
abbrev CoinSpace := Cantor x Cantor

def halfI : I := <1 / 2, by constructor <;> norm_num>

def fairBit : Measure Bool := Ber(true, false, halfI)

instance : IsProbabilityMeasure fairBit := by
  unfold fairBit
  infer_instance

def cantorMeasure : Measure Cantor :=
  Measure.infinitePi (fun _ : Nat => fairBit)

instance : IsProbabilityMeasure cantorMeasure := by
  unfold cantorMeasure
  infer_instance

def coinMeasure : Measure CoinSpace :=
  cantorMeasure.prod cantorMeasure

instance : IsProbabilityMeasure coinMeasure := by
  unfold coinMeasure
  infer_instance

/-- Paper  $A(X)$  for fair-coin space: measurable sets modulo null. -/
abbrev coinAlgebra := MeasureAlgebra coinMeasure

abbrev coinLO (Y) := LOMeasure coinMeasure Y

def G_X_coin {Y : Type*} [Countable Y] := G_X_measure (Y := Y) coinMeasure

def D1 (n : Nat) (b : Bool) : Set CoinSpace := {p | p.1 n = b}

def D2 (n : Nat) (b : Bool) : Set CoinSpace := {p | p.2 n = b}

theorem measurableSet_D1 (n : Nat) (b : Bool) : MeasurableSet (D1 n b) := by
  change MeasurableSet ((fun ? : Cantor => ? n) comp Prod.fst ^-1' {b})
  exact MeasurableSet.preimage (MeasurableSet.singleton b)
  ((measurable_pi_apply n).comp measurable_fst)

theorem measurableSet_D2 (n : Nat) (b : Bool) : MeasurableSet (D2 n b) := by
  change MeasurableSet ((fun ? : Cantor => ? n) comp Prod.snd ^-1' {b})
  exact MeasurableSet.preimage (MeasurableSet.singleton b)
  ((measurable_pi_apply n).comp measurable_snd)

/-- Paper equation (5):  $S_1(\text{check } n) = [D_{\{1,n,1\}}]$  in  $P^{A(X)}(\text{check } ?)$ . -/
noncomputable def coinS1 : ASubset coinAlgebra Nat :=
  fun n => MeasureAlgebra.mk coinMeasure (D1 n true) (measurableSet_D1 n true)

/-- Paper equation (5):  $S_2(\text{check } n) = [D_{\{2,n,1\}}]$  in  $P^{A(X)}(\text{check } ?)$ . -/
noncomputable def coinS2 : ASubset coinAlgebra Nat :=
  fun n => MeasureAlgebra.mk coinMeasure (D2 n true) (measurableSet_D2 n true)

```

```

theorem coinS1_eq (n : Nat) :
  coinS1 n = MeasureAlgebra.mk coinMeasure (D1 n true) (measurableSet_D1 n true) :=
  rfl

theorem coinS2_eq (n : Nat) :
  coinS2 n = MeasureAlgebra.mk coinMeasure (D2 n true) (measurableSet_D2 n true) :=
  rfl

/-- `?check n in S_1? = S_1(check n)` (paper reminder after (5)). -/
theorem memB_coinS1 (n : Nat) :
  memB n coinS1 = MeasureAlgebra.mk coinMeasure (D1 n true) (measurableSet_D1 n true) :=
  rfl

theorem memB_coinS2 (n : Nat) :
  memB n coinS2 = MeasureAlgebra.mk coinMeasure (D2 n true) (measurableSet_D2 n true) :=
  rfl

theorem D1_false_eq_compl (n : Nat) : D1 n false = (D1 n true)? := by
  ext p
  simp [D1]

theorem D2_false_eq_compl (n : Nat) : D2 n false = (D2 n true)? := by
  ext p
  simp [D2]

theorem toNNReal_halfI : ((toNNReal halfI) : ? >= 0 inf) = (2^-1 : ? >= 0 inf) := by
  have h : toNNReal halfI = (2^-1 : ? >= 0) := by
    apply Subtype.ext
    simp [halfI, toNNReal]
  rw [h, ENNReal.coe_inv_two]

theorem toNNReal_symm_halfI : ((toNNReal (sigma halfI)) : ? >= 0 inf) = 2^-1 := by
  have : sigma halfI = halfI := by
    apply Subtype.ext
    simp [halfI, coe_symm_eq]
  norm_num
  rw [this, toNNReal_halfI]

theorem fairBit_singleton (b : Bool) : fairBit {b} = 2^-1 := by
  cases b
  * rw [fairBit, bernoulliMeasure_apply_of_notMem_of_mem
    (hs := MeasurableSet.singleton false) (hx := by simp) (hy := by simp)]
    exact toNNReal_symm_halfI
  * rw [fairBit, bernoulliMeasure_apply_of_mem_of_notMem
    (hs := MeasurableSet.singleton true) (hx := by simp) (hy := by simp)]
    exact toNNReal_halfI

theorem cantor_pi_singleton (F : Finset Nat) (bit : Nat -> Bool) :
  cantorMeasure (Set.pi F (fun n => ({bit n} : Set Bool))) = (2^-1 : ? >= 0 inf) ^ F.card :=
  by
  have hmeas : forall n in F, MeasurableSet ({bit n} : Set Bool) :=
    fun _ => MeasurableSet.singleton _
  rw [cantorMeasure, Measure.infinitePi_pi _ hmeas]
  simp [fairBit_singleton, Finset.prod_const]

theorem D1_iInter (F : Finset Nat) (bit : Nat -> Bool) :
  ? n in F, D1 n (bit n) =
  (Set.pi F (fun n => ({bit n} : Set Bool))) x ? (Set.univ : Set Cantor) := by
  ext p
  simp [D1, mem_prod, mem_pi]

theorem coinMeasure_D1_cylinder (F : Finset Nat) (bit : Nat -> Bool) :
  coinMeasure (? n in F, D1 n (bit n)) = (2^-1 : ? >= 0 inf) ^ F.card := by

```

```

rw [D1_iInter, coinMeasure, Measure.prod_prod, cantor_pi_singleton, measure_univ, mul_one]

def finitePreimageSet (f : Nat → Nat) (K : Finset Nat) : Set CoinSpace :=
  ? n : Nat, D1 n (decide (f n in K))

theorem finitePreimageSet_subset_cylinder (f : Nat → Nat) (K : Finset Nat) (N : Nat) :
  finitePreimageSet f K ⊆ Finset.range N, D1 n (decide (f n in K)) := by
  intro p hp
  simp only [mem_iInter, finitePreimageSet] at hp |
  exact fun n _ => hp n

theorem coinMeasure_le_half_pow {s : Set CoinSpace}
  (h : forall N : Nat, coinMeasure s ≤ (2-1 : ?) >= 0 inf ) ^ N) :
  coinMeasure s = 0 := by
  refine le_antisymm ?_ bot_le
  by_contra hne
  have hpos : 0 < coinMeasure s := lt_of_not_ge hne
  have hlt : (2-1 : ?) >= 0 inf ) < 1 := by norm_num
  have : exists N, (2-1 : ?) >= 0 inf ) ^ N < coinMeasure s :=
    ((ENNReal.tendsto_pow_atTop_nhds_zero_of_lt_one hlt).eventually
      (gt_mem_nhds hpos)).exists
  obtain <N, hN> := this
  exact (not_lt.mpr (h N)) hN

theorem proposition_42_finite (f : Nat → Nat) (K : Finset Nat) :
  coinMeasure (finitePreimageSet f K) = 0 := by
  refine coinMeasure_le_half_pow fun N => ?_
  have hcard : ((2-1 : ?) >= 0 inf ) ^ (Finset.range N).card = (2-1) ^ N := by
    simp
  exact (measure_mono (finitePreimageSet_subset_cylinder f K N)).trans
    (hcard |> le_of_eq (coinMeasure_D1_cylinder (Finset.range N)
      (fun n => decide (f n in K))))

def agreeSet (f : Nat → Nat) : Set CoinSpace :=
  {p | forall n, p.1 n = true <-> p.2 (f n) = true}

def agreeSet_swap (f : Nat → Nat) : Set CoinSpace :=
  {p | forall n, p.2 n = true <-> p.1 (f n) = true}

theorem measurableSet_agreeSet (f : Nat → Nat) : MeasurableSet (agreeSet f) := by
  have : agreeSet f =
    ? n, (D1 n true I D2 (f n) true) U (D1 n false I D2 (f n) false) := by
  ext p
  simp only [agreeSet, mem_iInter, mem_union, mem_inter_iff, D1, D2, mem_setOf]
  refine forall_congr' fun n => ?_
  cases p.1 n <=> cases p.2 (f n) <=> simp
  rw [this]
  refine MeasurableSet.iInter fun n =>
    ((measurableSet_D1 n true).inter (measurableSet_D2 (f n) true)).union
      ((measurableSet_D1 n false).inter (measurableSet_D2 (f n) false))

theorem agreeSet_of_finite_image {f : Nat → Nat} (hf : (Set.range f).Finite) :
  agreeSet f ⊆ Finset.range N, finitePreimageSet f K := by
  intro p hp
  let K := hf.toFinset.filter (fun m => p.2 m = true)
  refine mem_iUnion.mpr <K, ?_>
  simp only [finitePreimageSet, mem_iInter, D1, mem_setOf]
  intro n
  have hiff : p.1 n = true <-> p.2 (f n) = true := hp n
  have hmem : f n in hf.toFinset := hf.mem_toFinset.mpr (mem_range_self n)
  have hK : f n in K <-> p.2 (f n) = true := by
    simp [K, hmem]
  change p.1 n = decide (f n in K)

```

```

cases hbit : p.1 n
* have : f n notin K := by
  rw [hK]
  intro ht
  have htrue : p.1 n = true := hiff.mpr ht
  rw [hbit] at htrue
  exact Bool.false_ne_true htrue
simp [this]
* have : f n in K := by
  rw [hK]
  exact hiff.mp (by simp [hbit])
simp [this]

theorem agreeSet_finite_image_null {f : Nat → Nat} (hf : (Set.range f).Finite) :
  coinMeasure (agreeSet f) = 0 :=
  measure_mono_null (agreeSet_of_finite_image hf)
  (measure_iUnion_null fun K => proposition_42_finite f K)

/-- Finite-image half of Proposition 42. The infinite-image clause
`coinMeasure (agreeSet f) = 0` for arbitrary `f` is
`proposition_42_infinite_image`. -/
theorem proposition_42_finite_image (f : Nat → Nat) (hf : (Set.range f).Finite) :
  coinMeasure (agreeSet f) = 0 :=
  agreeSet_finite_image_null hf

/-! ## D2 cylinders and the mixed product used in the infinite-image expansion -/

theorem D2_iInter (F : Finset Nat) (bit : Nat → Bool) :
  ? n in F, D2 n (bit n) =
  (Set.univ : Set Cantor) x ? (Set.pi F (fun n => ({bit n} : Set Bool))) := by
  ext p
  simp [D2, mem_prod, mem_pi]

theorem coinMeasure_D2_cylinder (F : Finset Nat) (bit : Nat → Bool) :
  coinMeasure (? n in F, D2 n (bit n)) = (2-1 : ? >= 0 inf) ^ F.card := by
  rw [D2_iInter, coinMeasure, Measure.prod_prod, measure_univ, cantor_pi_singleton, one_mul]

def finitePreimageSet_swap (f : Nat → Nat) (K : Finset Nat) : Set CoinSpace :=
  ? n : Nat, D2 n (decide (f n in K))

theorem finitePreimageSet_swap_eq (f : Nat → Nat) (K : Finset Nat) :
  finitePreimageSet_swap f K = Prod.swap ^-1' finitePreimageSet f K := by
  ext p
  simp [finitePreimageSet_swap, finitePreimageSet, D1, D2]

theorem measurableSet_finitePreimageSet (f : Nat → Nat) (K : Finset Nat) :
  MeasurableSet (finitePreimageSet f K) :=
  MeasurableSet.iInter fun n => measurableSet_D1 n (decide (f n in K))

theorem measurableSet_finitePreimageSet_swap (f : Nat → Nat) (K : Finset Nat) :
  MeasurableSet (finitePreimageSet_swap f K) :=
  MeasurableSet.iInter fun n => measurableSet_D2 n (decide (f n in K))

theorem proposition_42_finite_swap (f : Nat → Nat) (K : Finset Nat) :
  coinMeasure (finitePreimageSet_swap f K) = 0 := by
  rw [finitePreimageSet_swap_eq, <- Measure.map_apply measurable_swap
    (measurableSet_finitePreimageSet f K)]
  have hmap : Measure.map Prod.swap coinMeasure = coinMeasure := by
    unfold coinMeasure
    exact Measure.prod_swap
  rw [hmap, proposition_42_finite]

def agreeBit (f : Nat → Nat) (n : Nat) (b : Bool) : Set CoinSpace :=

```

```

D1 n b I D2 (f n) b

theorem measurableSet_agreeBit (f : Nat -> Nat) (n : Nat) (b : Bool) :
  MeasurableSet (agreeBit f n b) :=
  (measurableSet_D1 n b).inter (measurableSet_D2 (f n) b)

def agreeSlice (f : Nat -> Nat) (K : Finset Nat) : Set CoinSpace :=
  ? n in K, agreeBit f n true U agreeBit f n false

theorem agreeSet_subset_slice (f : Nat -> Nat) (K : Finset Nat) :
  agreeSet f subsesteq agreeSlice f K := by
  intro p hp
  simp only [agreeSlice, mem_iInter, mem_union, agreeBit, D1, D2, mem_inter_iff, mem_setOf]
  intro n_hn
  have hiff : p.1 n = true <-> p.2 (f n) = true := hp n
  cases h1 : p.1 n <;> cases h2 : p.2 (f n) <;> simp_all

def mixedCyl (f : Nat -> Nat) (K : Finset Nat) (g : Nat -> Bool) : Set CoinSpace :=
  ? n in K, agreeBit f n (g n)

def mixedCylSub (f : Nat -> Nat) (K : Finset Nat) (g : {n // n in K} -> Bool) : Set
  CoinSpace :=
  ? n : {n // n in K}, agreeBit f n.val (g n)

theorem mixedCylSub_eq (f : Nat -> Nat) (K : Finset Nat) (g : {n // n in K} -> Bool) :
  mixedCylSub f K g =
  mixedCyl f K (fun n => if h : n in K then g <n, h> else false) := by
  ext p
  simp only [mixedCylSub, mixedCyl, mem_iInter]
  constructor
  * intro hp n hn
    simpa [hn] using hp <n, hn>
  * intro hp n
    simpa [n.property] using hp n.val n.property

noncomputable def imageBit (f : Nat -> Nat) (K : Finset Nat) (g : Nat -> Bool) (m : Nat) :
  Bool :=
  g (Function.invFunOn f (K : Set Nat) m)

theorem mixedCyl_eq_prod (f : Nat -> Nat) (K : Finset Nat) (g : Nat -> Bool)
  (hinv : Set.InjOn f (K : Set Nat)) :
  mixedCyl f K g =
  (Set.pi (K : Set Nat) (fun n => ({g n} : Set Bool))) x ?
  (Set.pi (K.image f : Set Nat) (fun m => ({imageBit f K g m} : Set Bool))) := by
  ext p
  simp only [mixedCyl, agreeBit, D1, D2, mem_iInter, mem_inter_iff, mem_setOf,
    mem_prod, mem_pi, imageBit]
  constructor
  * intro hp
    constructor
    * intro n hn
      exact (hp n hn).1
    * intro m hm
      obtain <n, hn, rfl> := Finset.mem_image.mp hm
      have hinv : Function.invFunOn f (K : Set Nat) (f n) = n :=
        hinv.leftInvOn_invFunOn hn
      simpa [hinv] using (hp n hn).2
  * intro <hp1, hp2> n hn
    refine <hp1 n hn, ?_>
    have hm : f n in K.image f := Finset.mem_image.mpr <n, hn, rfl>
    have hinv : Function.invFunOn f (K : Set Nat) (f n) = n :=
      hinv.leftInvOn_invFunOn hn
    simpa [hinv] using hp2 (f n) hm

```

```

theorem two_pow_mul_half_pow_two (n : Nat) :
  (2 : ? >= 0 inf) ^ n * (2^-1) ^ (2 * n) = (2^-1) ^ n := by
  have h2 : (2 : ? >= 0 inf) * 2^-1 = 1 :=
    ENNReal.mul_inv_cancel (by norm_num) (by norm_num)
  calc
    (2 : ? >= 0 inf) ^ n * (2^-1) ^ (2 * n)
      = 2 ^ n * (2^-1) ^ (n + n) := by rw [two_mul]
    _ = 2 ^ n * ((2^-1) ^ n * (2^-1) ^ n) := by rw [pow_add]
    _ = (2 ^ n * (2^-1) ^ n) * (2^-1) ^ n := by rw [← mul_assoc]
    _ = (2 * 2^-1) ^ n * (2^-1) ^ n := by rw [← mul_pow]
    _ = (1 : ? >= 0 inf) ^ n * (2^-1) ^ n := by rw [h2]
    _ = (2^-1) ^ n := by simp

theorem coinMeasure_mixedCyl (f : Nat → Nat) (K : Finset Nat) (g : Nat → Bool)
  (hinv : Set.InjOn f (K : Set Nat)) :
  coinMeasure (mixedCyl f K g) = (2^-1 : ? >= 0 inf) ^ (2 * K.card) := by
  rw [mixedCyl_eq_prod f K g hinv, coinMeasure, Measure.prod_prod,
    cantor_pi_singleton, cantor_pi_singleton]
  have hcard : (K.image f).card = K.card := Finset.card_image_of_injOn hinv
  rw [hcard, ← pow_add, ← two_mul]

theorem coinMeasure_mixedCylSub (f : Nat → Nat) (K : Finset Nat)
  (g : {n // n in K} → Bool) (hinv : Set.InjOn f (K : Set Nat)) :
  coinMeasure (mixedCylSub f K g) = (2^-1 : ? >= 0 inf) ^ (2 * K.card) := by
  rw [mixedCylSub_eq, coinMeasure_mixedCyl f K _ hinv]

theorem measurableSet_mixedCylSub (f : Nat → Nat) (K : Finset Nat)
  (g : {n // n in K} → Bool) : MeasurableSet (mixedCylSub f K g) :=
  MeasurableSet.iInter fun n => measurableSet_agreeBit f n.val (g n)

theorem mixedCylSub_disjoint (f : Nat → Nat) (K : Finset Nat) :
  Pairwise (fun g g' : {n // n in K} → Bool =>
    Disjoint (mixedCylSub f K g) (mixedCylSub f K g')) := by
  intro g g' hne
  rw [disjoint_iff_inf_le]

```

Lean 4 source (lines 401–800)

```

intro p hp
have hne' : not forall n, g n = g' n := mt funext hne
obtain <n, hng> := not_forall.mp hne'
have h1 : p in agreeBit f n.val (g n) := mem_iInter.mp hp.1 n
have h2 : p in agreeBit f n.val (g' n) := mem_iInter.mp hp.2 n
have hD : p.1 n.val = g n /\ p.1 n.val = g' n := by
  simp [agreeBit, D1] at h1 h2
  exact <h1.1, h2.1>
exact hng (hD.1.symm.trans hD.2)

/-- Finite distributive law: the slice is the union of 2^|K| mixed cylinders. -/
theorem agreeSlice_eq_iUnion (f : Nat → Nat) (K : Finset Nat) :
  agreeSlice f K = ? g : {n // n in K} → Bool, mixedCylSub f K g := by
  ext p
  constructor
  * intro hp
  let g : {n // n in K} → Bool := fun n => p.1 n.val
  refine mem_iUnion.mpr <g, ?_>
  simp only [mixedCylSub, mem_iInter, agreeBit, D1, D2, mem_inter_iff, mem_setOf]
  intro n
  refine <rfl, ?_>
  have hslice : p in agreeBit f n.val true U agreeBit f n.val false := by
    simp only [agreeSlice, mem_iInter] at hp
    exact hp n.val n.property
  simp only [mem_union, agreeBit, D1, D2, mem_inter_iff, mem_setOf] at hslice

```



```

cases hbit : p.1 n.val
* rcases hslice with h | h
  * exact absurd (hbit.symm.trans h.1) Bool.false_ne_true
  * exact h.2.trans hbit.symm
* rcases hslice with h | h
  * exact h.2.trans hbit.symm
  * exact absurd (h.1.symm.trans hbit) Bool.false_ne_true
* intro hp
  obtain <g, hg> := mem_iUnion.mp hp
  simp only [agreeSlice, mem_iInter, mem_union]
  intro n hn
  have : p in agreeBit f n (g <n, hn>) := mem_iInter.mp hg <n, hn>
  cases hbit : g <n, hn>
  * exact Or.inr (by simp [hbit] using this)
  * exact Or.inl (by simp [hbit] using this)

theorem coinMeasure_agreeSlice (f : Nat -> Nat) (K : Finset Nat)
  (hinv : Set.InjOn f (K : Set Nat)) :
  coinMeasure (agreeSlice f K) = (2-1 : ? >= 0 inf) ^ K.card := by
  rw [agreeSlice_eq_iUnion, measure_iUnion (mixedCylSub_disjoint f K)
    (fun g => measurableSet_mixedCylSub f K g)]
  have h? : forall g : {n // n in K} -> Bool,
    coinMeasure (mixedCylSub f K g) = (2-1 : ? >= 0 inf) ^ (2 * K.card) :=
    fun g => coinMeasure_mixedCylSub f K g hinv
  simp_rw [h?]
  rw [tsum_fintype, Finset.sum_const, nsmul_eq_mul, Finset.card_univ]
  have hcard : Fintype.card ({n // n in K} -> Bool) = 2 ^ K.card := by
    rw [Fintype.card_fun, Fintype.card_bool, Fintype.card_coe]
  rw [hcard]
  have hcast : ((2 ^ K.card : Nat) : ? >= 0 inf) = (2 : ? >= 0 inf) ^ K.card :=
    Nat.cast_pow (2 : Nat) K.card
  rw [hcast, two_pow_mul_half_pow_two]

theorem exists_injOn_infinite {f : Nat -> Nat} (hf : (Set.range f).Infinite) :
  exists g : Nat -> Nat, Function.Injective (f comp g) := by
  haveI : Infinite (Set.range f) := hf.to_subtype
  let e := Infinite.natEmbedding (Set.range f)
  refine <fun n => Classical.choose (e n).property, ?_>
  intro i j hij
  have hi : f (Classical.choose (e i).property) = (e i).val :=
    Classical.choose_spec (e i).property
  have hj : f (Classical.choose (e j).property) = (e j).val :=
    Classical.choose_spec (e j).property
  have hval : (e i).val = (e j).val := hi.symm.trans (hij.trans hj)
  exact e.injective (Subtype.ext hval)

/-- Infinite-image half of Proposition 42: `2|K|` disjoint cylinders of
measure `2-2|K|`, exhausted along an injective restriction. -/
theorem proposition_42_infinite_image {f : Nat -> Nat} (hf : (Set.range f).Infinite) :
  coinMeasure (agreeSet f) = 0 := by
  obtain <g, hg> := exists_injOn_infinite hf
  have hg_inj : Function.Injective g := hg.of_comp
  refine coinMeasure_le_half_pow fun N => ?_
  let K := (Finset.range N).image g
  have hcard : K.card = N := by
    rw [Finset.card_image_of_injective _ hg_inj, Finset.card_range]
  have hinv : Set.InjOn f (K : Set Nat) := by
    intro a ha b hb hab
    obtain <i, hi, rfl> := Finset.mem_image.mp ha
    obtain <j, hj, rfl> := Finset.mem_image.mp hb
    exact congrArg g (hg hab)
  have hsub : agreeSet f subseq agreeSlice f K := agreeSet_subset_slice f K
  have h? : coinMeasure (agreeSlice f K) = (2-1 : ? >= 0 inf) ^ N := by

```

```

    rw [coinMeasure_agreeSlice f K hinj, hcard]
    exact (measure_mono hsub).trans h?.le

theorem agreeSet_null (f : Nat -> Nat) : coinMeasure (agreeSet f) = 0 := by
  by_cases hf : (Set.range f).Finite
  * exact proposition_42_finite_image f hf
  * exact proposition_42_infinite_image (Set.not_finite.mp hf)

theorem agreeSet_swap_eq_preimage (f : Nat -> Nat) :
  agreeSet_swap f = Prod.swap ^-1' agreeSet f := by
  ext p
  simp [agreeSet_swap, agreeSet]

theorem measurableSet_agreeSet_swap (f : Nat -> Nat) :
  MeasurableSet (agreeSet_swap f) := by
  rw [agreeSet_swap_eq_preimage]
  exact (measurableSet_agreeSet f).preimage measurable_swap

theorem coinMeasure_agreeSet_swap (f : Nat -> Nat) :
  coinMeasure (agreeSet_swap f) = coinMeasure (agreeSet f) := by
  rw [agreeSet_swap_eq_preimage, <- Measure.map_apply measurable_swap (measurableSet_agreeSet
    f)]
  have hmap : Measure.map Prod.swap coinMeasure = coinMeasure := by
    unfold coinMeasure
    exact Measure.prod_swap
  rw [hmap]

/-- Proposition 42 (measure-theoretic Boolean-value-0 reading).
Neither `S_1` nor `S_2` is a finite `A`-preimage, and they are not related
by any classical `f`. -/
theorem proposition_42 (f : Nat -> Nat) :
  (forall K : Finset Nat, coinMeasure (finitePreimageSet f K) = 0) /\
  (forall K : Finset Nat, coinMeasure (finitePreimageSet_swap f K) = 0) /\
  coinMeasure (agreeSet f) = 0 /\
  coinMeasure (agreeSet_swap f) = 0 :=
  <fun K => proposition_42_finite f K,
  fun K => proposition_42_finite_swap f K,
  agreeSet_null f,
  (coinMeasure_agreeSet_swap f).trans (agreeSet_null f)>

theorem proposition_42_mk_bot (f : Nat -> Nat) :
  MeasureAlgebra.mk coinMeasure (agreeSet f) (measurableSet_agreeSet f) = False /\
  MeasureAlgebra.mk coinMeasure (agreeSet_swap f) (measurableSet_agreeSet_swap f) =
  False :=
  <(MeasureAlgebra.mk_eq_bot coinMeasure).mpr (agreeSet_null f),
  (MeasureAlgebra.mk_eq_bot coinMeasure).mpr
  ((coinMeasure_agreeSet_swap f).trans (agreeSet_null f))>

/-!
## Proposition 42 in `coinAlgebra`

The finite-`K` clause is a join over `Finset Nat` (standard finite
subsets). The paper's `exists K in P_fin^{A}(check ?)` also ranges over
fuzzy `pfinB` names; that quantification is a remaining strengthening
and is not named `proposition_42_va` here.
-/

theorem agreeSet_eq_iInter (f : Nat -> Nat) :
  agreeSet f = ? n, agreeBit f n true U agreeBit f n false := by
  ext p
  simp only [agreeSet, agreeBit, mem_iInter, mem_union, mem_inter_iff, D1, D2,
    mem_setOf]
  refine forall_congr' fun n => ?_

```

```

cases p.1 n <;> cases p.2 (f n) <;> simp

theorem agreeSet_swap_eq_iInter (f : Nat -> Nat) :
  agreeSet_swap f =
    ? n, (D2 n true I D1 (f n) true) U (D2 n false I D1 (f n) false) := by
  ext p
  simp only [agreeSet_swap, mem_iInter, mem_union, mem_inter_iff, D1, D2,
    mem_setOf]
  refine forall_congr' fun n => ?_
  cases p.2 n <;> cases p.1 (f n) <;> simp

theorem measurableSet_agreeBitUnion (f : Nat -> Nat) (n : Nat) :
  MeasurableSet (agreeBit f n true U agreeBit f n false) :=
  (measurableSet_agreeBit f n true).union (measurableSet_agreeBit f n false)

theorem measurableSet_agreeBitUnion_swap (f : Nat -> Nat) (n : Nat) :
  MeasurableSet ((D2 n true I D1 (f n) true) U (D2 n false I D1 (f n) false)) :=
  ((measurableSet_D2 n true).inter (measurableSet_D1 (f n) true)).union
  ((measurableSet_D2 n false).inter (measurableSet_D1 (f n) false))

theorem coinS1_iff_coinS2_eq_mk (f : Nat -> Nat) (n : Nat) :
  (coinS1 n ? coinS2 (f n)) sqcap (coinS2 (f n) ? coinS1 n) =
    MeasureAlgebra.mk coinMeasure (agreeBit f n true U agreeBit f n false)
    (measurableSet_agreeBitUnion f n) := by
  unfold coinS1 coinS2
  have h := MeasureAlgebra.iff_mk coinMeasure (D1 n true) (D2 (f n) true)
    (measurableSet_D1 n true) (measurableSet_D2 (f n) true)
  refine h.trans ?_
  refine (MeasureAlgebra.mk_eq_iff coinMeasure).mpr ?_
  have heq : (D1 n true I D2 (f n) true) U ((D1 n true)? I (D2 (f n) true)?) =
    agreeBit f n true U agreeBit f n false := by
    simp [agreeBit, D1_false_eq_compl, D2_false_eq_compl]
  simp [heq, symmDiff_self]

theorem coinS2_iff_coinS1_eq_mk (f : Nat -> Nat) (n : Nat) :
  (coinS2 n ? coinS1 (f n)) sqcap (coinS1 (f n) ? coinS2 n) =
    MeasureAlgebra.mk coinMeasure
    ((D2 n true I D1 (f n) true) U (D2 n false I D1 (f n) false))
    (measurableSet_agreeBitUnion_swap f n) := by
  unfold coinS1 coinS2
  have h := MeasureAlgebra.iff_mk coinMeasure (D2 n true) (D1 (f n) true)
    (measurableSet_D2 n true) (measurableSet_D1 (f n) true)
  refine h.trans ?_
  refine (MeasureAlgebra.mk_eq_iff coinMeasure).mpr ?_
  have heq : (D2 n true I D1 (f n) true) U ((D2 n true)? I (D1 (f n) true)?) =
    (D2 n true I D1 (f n) true) U (D2 n false I D1 (f n) false) := by
    simp [D1_false_eq_compl, D2_false_eq_compl]
  simp [heq, symmDiff_self]

theorem coinS1_preimage_S2_eq_mk (f : Nat -> Nat) :
  (? n, (coinS1 n ? coinS2 (f n)) sqcap (coinS2 (f n) ? coinS1 n)) =
    MeasureAlgebra.mk coinMeasure (agreeSet f) (measurableSet_agreeSet f) := by
  simp_rw [coinS1_iff_coinS2_eq_mk]
  rw [MeasureAlgebra.iInf_mk coinMeasure
    (fun n => agreeBit f n true U agreeBit f n false)
    (fun n => measurableSet_agreeBitUnion f n)]
  refine (MeasureAlgebra.mk_eq_iff coinMeasure).mpr ?_
  simp [← agreeSet_eq_iInter, symmDiff_self]

theorem coinS2_preimage_S1_eq_mk (f : Nat -> Nat) :
  (? n, (coinS2 n ? coinS1 (f n)) sqcap (coinS1 (f n) ? coinS2 n)) =
    MeasureAlgebra.mk coinMeasure (agreeSet_swap f)
    (measurableSet_agreeSet_swap f) := by

```

```

simp_rw [coinS2_iff_coinS1_eq_mk]
rw [MeasureAlgebra.iInf_mk coinMeasure
  (fun n => (D2 n true I D1 (f n) true) U (D2 n false I D1 (f n) false))
  (fun n => measurableSet_agreeBitUnion_swap f n)]
refine (MeasureAlgebra.mk_eq_iff coinMeasure).mpr ?_
simp [ <- agreeSet_swap_eq_iInter, symmDiff_self]

theorem coinS1_preimage_S2_eq_bot (f : Nat -> Nat) :
  (? n, (coinS1 n ? coinS2 (f n)) sqcap (coinS2 (f n) ? coinS1 n)) = False := by
  rw [coinS1_preimage_S2_eq_mk, (proposition_42_mk_bot f).1]

theorem coinS2_preimage_S1_eq_bot (f : Nat -> Nat) :
  (? n, (coinS2 n ? coinS1 (f n)) sqcap (coinS1 (f n) ? coinS2 n)) = False := by
  rw [coinS2_preimage_S1_eq_mk, (proposition_42_mk_bot f).2]

theorem coinS1_iff_checkSet_eq_mk (f : Nat -> Nat) (K : Finset Nat) (n : Nat) :
  (coinS1 n ? checkSet (A := coinAlgebra) (K : Set Nat) (f n)) sqcap
  (checkSet (A := coinAlgebra) (K : Set Nat) (f n) ? coinS1 n) =
  MeasureAlgebra.mk coinMeasure (D1 n (decide (f n in K)))
  (measurableSet_D1 n (decide (f n in K))) := by
  by_cases hmem : f n in K
  * have hcheck : checkSet (A := coinAlgebra) (K : Set Nat) (f n) = top :=
    checkSet_mem (A := coinAlgebra) (by exact_mod_cast hmem)
    have hdec : decide (f n in K) = true := decide_eq_true hmem
    rw [hcheck, himp_top, top_himp, top_inf_eq, coinS1, hdec]
  * have hcheck : checkSet (A := coinAlgebra) (K : Set Nat) (f n) = False :=
    checkSet_not_mem (A := coinAlgebra) (by exact_mod_cast hmem)
    have hdec : decide (f n in K) = false := decide_eq_false hmem
    rw [hcheck, himp_bot, bot_himp, inf_top_eq, coinS1, hdec,
      MeasureAlgebra.compl_mk]
  exact (MeasureAlgebra.mk_eq_iff coinMeasure).mpr
  (by simp [D1_false_eq_compl, symmDiff_self])

theorem coinS2_iff_checkSet_eq_mk (f : Nat -> Nat) (K : Finset Nat) (n : Nat) :
  (coinS2 n ? checkSet (A := coinAlgebra) (K : Set Nat) (f n)) sqcap
  (checkSet (A := coinAlgebra) (K : Set Nat) (f n) ? coinS2 n) =
  MeasureAlgebra.mk coinMeasure (D2 n (decide (f n in K)))
  (measurableSet_D2 n (decide (f n in K))) := by
  by_cases hmem : f n in K
  * have hcheck : checkSet (A := coinAlgebra) (K : Set Nat) (f n) = top :=
    checkSet_mem (A := coinAlgebra) (by exact_mod_cast hmem)
    have hdec : decide (f n in K) = true := decide_eq_true hmem
    rw [hcheck, himp_top, top_himp, top_inf_eq, coinS2, hdec]
  * have hcheck : checkSet (A := coinAlgebra) (K : Set Nat) (f n) = False :=
    checkSet_not_mem (A := coinAlgebra) (by exact_mod_cast hmem)
    have hdec : decide (f n in K) = false := decide_eq_false hmem
    rw [hcheck, himp_bot, bot_himp, inf_top_eq, coinS2, hdec,
      MeasureAlgebra.compl_mk]
  exact (MeasureAlgebra.mk_eq_iff coinMeasure).mpr
  (by simp [D2_false_eq_compl, symmDiff_self])

theorem coinS1_finite_preimage_eq_mk (f : Nat -> Nat) (K : Finset Nat) :
  (? n, (coinS1 n ? checkSet (A := coinAlgebra) (K : Set Nat) (f n)) sqcap
  (checkSet (A := coinAlgebra) (K : Set Nat) (f n) ? coinS1 n)) =
  MeasureAlgebra.mk coinMeasure (finitePreimageSet f K)
  (measurableSet_finitePreimageSet f K) := by
  simp_rw [coinS1_iff_checkSet_eq_mk]
  rw [MeasureAlgebra.iInf_mk coinMeasure
    (fun n => D1 n (decide (f n in K)))
    (fun n => measurableSet_D1 n (decide (f n in K)))]
  rfl

theorem coinS2_finite_preimage_eq_mk (f : Nat -> Nat) (K : Finset Nat) :

```

```

    (? n, (coinS2 n ? checkSet (A := coinAlgebra) (K : Set Nat) (f n)) sqcap
      (checkSet (A := coinAlgebra) (K : Set Nat) (f n) ? coinS2 n)) =
      MeasureAlgebra.mk coinMeasure (finitePreimageSet_swap f K)
      (measurableSet_finitePreimageSet_swap f K) := by
simp_rw [coinS2_iff_checkSet_eq_mk]
rw [MeasureAlgebra.iInf_mk coinMeasure
  (fun n => D2 n (decide (f n in K)))
  (fun n => measurableSet_D2 n (decide (f n in K)))]
rfl

theorem coinS1_finite_preimage_eq_bot (f : Nat -> Nat) (K : Finset Nat) :
  (? n, (coinS1 n ? checkSet (A := coinAlgebra) (K : Set Nat) (f n)) sqcap
    (checkSet (A := coinAlgebra) (K : Set Nat) (f n) ? coinS1 n)) = False := by
  rw [coinS1_finite_preimage_eq_mk,
    (MeasureAlgebra.mk_eq_bot coinMeasure).mpr (proposition_42_finite f K)]

theorem coinS2_finite_preimage_eq_bot (f : Nat -> Nat) (K : Finset Nat) :
  (? n, (coinS2 n ? checkSet (A := coinAlgebra) (K : Set Nat) (f n)) sqcap
    (checkSet (A := coinAlgebra) (K : Set Nat) (f n) ? coinS2 n)) = False := by
  rw [coinS2_finite_preimage_eq_mk,
    (MeasureAlgebra.mk_eq_bot coinMeasure).mpr (proposition_42_finite_swap f K)]

/-- Proposition 42 as Boolean value `False` in `coinAlgebra`. The finite-`K`
clause is a `Finset` join (not the full internal `pfinB` exists). -/
theorem proposition_42_algebra (f : Nat -> Nat) :
  (( bigcup K : Finset Nat, ? n : Nat,
    (coinS1 n ? checkSet (A := coinAlgebra) (K : Set Nat) (f n)) sqcap
    (checkSet (A := coinAlgebra) (K : Set Nat) (f n) ? coinS1 n)) = False) /\
  (( bigcup K : Finset Nat, ? n : Nat,
    (coinS2 n ? checkSet (A := coinAlgebra) (K : Set Nat) (f n)) sqcap
    (checkSet (A := coinAlgebra) (K : Set Nat) (f n) ? coinS2 n)) = False) /\
  ((? n, (coinS1 n ? coinS2 (f n)) sqcap (coinS2 (f n) ? coinS1 n)) = False) /\
  ((? n, (coinS2 n ? coinS1 (f n)) sqcap (coinS1 (f n) ? coinS2 n)) = False) :=
  <iSup_eq_bot.mpr fun K => coinS1_finite_preimage_eq_bot f K,
  iSup_eq_bot.mpr fun K => coinS2_finite_preimage_eq_bot f K,
  coinS1_preimage_S2_eq_bot f,
  coinS2_preimage_S1_eq_bot f>

/-! ## Theorem 43 (external oracles; paper uses Cor 34 + Thm 1 internally) -/

theorem proposition_36_i_mem {T_1 T_2 : Set Nat} (h : proposition_36_i T_1 T_2) :
  exists M : Lam Nat, exists hM : MapsNumerals M,
  forall n, n in T_1 <=> mapsNumeralsFun M hM n in T_2 := by
  obtain <M, hM, d_1, d_2, hd_1, hd_2, hagree> := h
  refine <M, hM, fun n => ?_>
  set f := mapsNumeralsFun M hM
  have hMn := mapsNumerals_interp_numeral hM n
  have hchi : chiNum engelerWithNumerals T_2 (f n) =
    chiNum engelerWithNumerals T_1 n := by
  calc
    chiNum engelerWithNumerals T_2 (f n)
      = engelerWithNumerals.app d_2 (engelerWithNumerals.numeral (f n)) :=
      (hd_2 (f n)).symm
    _ = engelerWithNumerals.app d_2
      (interpClosed engelerWithNumerals.toReflexiveDcpo (M.app (churchNumN n))) := by
      rw [hMn]
    _ = engelerWithNumerals.app d_1 (engelerWithNumerals.numeral n) := hagree n
    _ = chiNum engelerWithNumerals T_1 n := hd_1 n
  exact Iff.symm ((chiNum_eq_iff engelerWithNumerals T_2 T_1 (f n) n).mp hchi)

def bits1 (p : CoinSpace) : Set Nat := {n | p.1 n = true}

def bits2 (p : CoinSpace) : Set Nat := {n | p.2 n = true}

```

```

theorem mem_agreeSet_bits (f : Nat -> Nat) (p : CoinSpace) :
  p in agreeSet f <-> forall n, n in bits1 p <-> f n in bits2 p := by
  simp [agreeSet, bits1, bits2]

theorem mem_agreeSet_swap_bits (f : Nat -> Nat) (p : CoinSpace) :
  p in agreeSet_swap f <-> forall n, n in bits2 p <-> f n in bits1 p := by
  simp [agreeSet_swap, bits1, bits2]

noncomputable def reductionNullSet : Set CoinSpace :=
  ? M : Lam Nat, ? h : MapsNumerals M,
  agreeSet (mapsNumeralsFun M h) U agreeSet_swap (mapsNumeralsFun M h)

theorem reductionNullSet_null : coinMeasure reductionNullSet = 0 := by
  haveI : Countable (Lam Nat) := Function.Injective.countable lamEncode_injective
  refine measure_iUnion_null fun M => measure_iUnion_null fun h => ?_
  exact measure_union_null (proposition_42 (mapsNumeralsFun M h)).2.2.1
  (proposition_42 (mapsNumeralsFun M h)).2.2.2

theorem exists_mem_reductionNullSet_compl : exists p : CoinSpace, p notin reductionNullSet
:= by
  by_contra h
  push_neg at h
  have heq : reductionNullSet = (Set.univ : Set CoinSpace) := eq_univ_iff_forall.mpr h
  have : coinMeasure (Set.univ : Set CoinSpace) = 0 := heq |> reductionNullSet_null
  exact zero_ne_one (this.symm.trans measure_univ)

/-- Theorem 43: incomparable fun -definable many-one degrees. The paper
constructs Boolean-valued oracles in `?^A(check E)` by Theorem 1 applied
to Lemma 35(ii) internally in the Corollary 34 model; we only have
`corollary_34_check`. The external `chiOracle` / `lemma_35_ii` /
`proposition_36` form has the same type. -/
theorem theorem_43 :
  exists T_1 T_2 : Set Nat, not proposition_36_i T_1 T_2 /\ not proposition_36_i T_2 T_1
:= by
  obtain <p, hp> := exists_mem_reductionNullSet_compl
  refine <bits1 p, bits2 p, ?_, ?_>
  * intro h
    obtain <M, hM, hf> := proposition_36_i_mem h
    have hmem : p in reductionNullSet :=
      mem_iUnion.mpr <M, mem_iUnion.mpr <hM,
      Or.inl ((mem_agreeSet_bits (mapsNumeralsFun M hM) p).mpr hf)>>
    exact hp hmem
  * intro h
    obtain <M, hM, hf> := proposition_36_i_mem h
    have hmem : p in reductionNullSet :=
      mem_iUnion.mpr <M, mem_iUnion.mpr <hM,
      Or.inr ((mem_agreeSet_swap_bits (mapsNumeralsFun M hM) p).mpr hf)>>
    exact hp hmem

/-!
## Theorem 43, paper chain

Route: mix ground Lemma 35(ii) (`chiOracle`) on the fibers `bits_i`,
package as an `L?` random variable, and set `d_i = G_X_measure` of that
mix. Application is `engelerAppA engelerPair` (Proposition 40). This is
not the external `chiOracle` shortcut used by `theorem_43`.
-/

open Classical

theorem coinAlgebra_nontrivial_pair :
  (top : coinAlgebra) != False := by

```

Lean 4 source (lines 801–1200)

```

intro h
have hmk : MeasureAlgebra.mk coinMeasure Set.univ MeasurableSet.univ = False := by
  rw [MeasureAlgebra.mk_top, h]
have : coinMeasure (Set.univ : Set CoinSpace) = 0 :=
  (MeasureAlgebra.mk_eq_bot coinMeasure).mp hmk
exact zero_ne_one (this.symm.trans measure_univ)

instance : Nontrivial coinAlgebra :=
  < top , False, coinAlgebra_nontrivial_pair >

theorem MeasureAlgebra.mk_eq_top {X : Type*} [MeasurableSpace X]
  (? : Measure X) [IsFiniteMeasure ?] {s : Set X} {hs : MeasurableSet s} :
  MeasureAlgebra.mk ? s hs = ( top : MeasureAlgebra ?) <-> ? s? = 0 := by
  rw [ <- MeasureAlgebra.mk_top, MeasureAlgebra.mk_eq_iff]
  have : symmDiff s (Set.univ : Set X) = s? := by
    ext x
    simp [symmDiff]
  simp [this]

abbrev appCoin : ASubset coinAlgebra Nat -> ASubset coinAlgebra Nat ->
  ASubset coinAlgebra Nat :=
  engelerAppA engelerPair

/-- Membership of an Engeler carrier name as an `A`-subset of `Nat`. -/
def vaSubset {A : Type*} [CompleteBooleanAlgebra A]
  (c : EngelerCarrier (A := A)) : ASubset A Nat :=
  fun n => memOfNat (A := A) c n

theorem vaSubset_setToCanonical {A : Type*} [CompleteBooleanAlgebra A]
  (S : Set Nat) :
  vaSubset (A := A) (setToCanonical (A := A) S) = checkSet S := by
  funext n
  exact memOfNat_setToCanonical (A := A) S n

theorem vaSubset_interpClosedVA {A : Type*} [CompleteBooleanAlgebra A]
  {Var : Type*} [DecidableEq Var] (M : Lam Var) (hcl : M.fv = {}) :
  vaSubset (interpClosedVA (A := A) M) =
    checkSet (interpClosed
      (engelerReflexiveDcpo engelerPair engelerPair_injective) M) := by
  have h := lemma_31_closed (A := A) M hcl
  funext n
  change AName.memB (AName.check (PSet.ofNat n)) (child? (interpClosedVA (A := A) M)) =
    checkSet (interpClosed
      (engelerReflexiveDcpo engelerPair engelerPair_injective) M) n
  rw [eqB_top_memB_right (z := AName.check (PSet.ofNat n)) h]
  change memOfNat (A := A)
    (setToCanonical (interpClosed
      (engelerReflexiveDcpo engelerPair engelerPair_injective) M)) n =
    checkSet (interpClosed
      (engelerReflexiveDcpo engelerPair engelerPair_injective) M) n
  rw [memOfNat_setToCanonical]
  rfl

theorem chiNum_eq_boolTop (S : Set Nat) (n : Nat) :
  chiNum engelerWithNumerals S n = engelerWithNumerals.boolTop <-> n in S := by
  simp only [chiNum]
  by_cases hn : n in S
  * simp [hn]
  * simp [hn]
  exact engelerWithNumerals.bool_ne

theorem chiNum_eq_boolBot (S : Set Nat) (n : Nat) :

```

```

    chiNum engelerWithNumerals S n = engelerWithNumerals.boolBot <-> n notin S := by
simp only [chiNum]
by_cases hn : n in S
* simp [hn]
  exact engelerWithNumerals.bool_ne.symm
* simp [hn]

theorem mem_gbar_iff (S X : Set Nat) (r : Nat) :
  r in gbar S X <->
    exists n in numeralFingerprint X, r in chiNum engelerWithNumerals S n := by
constructor
* intro hr
  obtain <t, ht, hrt> := mem_sUnion.mp hr
  obtain <n, hn, rfl> := (mem_image _ _).mp ht
  exact <n, hn, hrt>
* intro <n, hn, hr>
  exact mem_sUnion.mpr
    <chiNum engelerWithNumerals S n, mem_image_of_mem _ hn, hr>

theorem mem_chiOracle_iff (S : Set Nat) (q : Nat) :
  q in chiOracle S <->
    exists K : Finset Nat, exists r : Nat,
      q = engelerPair (K, r) /\ r in gbar S (K : Set Nat) := by
change q in engelerLam engelerPair (gbar S) <-> _
constructor
* intro h
  obtain <K, r, hr, heq> := h
  exact <K, r, heq, hr>
* intro <K, r, heq, hr>
  exact <K, r, hr, heq>

theorem mem_chiNum_bits1 (p : CoinSpace) (n r : Nat) :
  r in chiNum engelerWithNumerals (bits1 p) n <->
    (p.1 n = true /\ r in engelerWithNumerals.boolTop) \/
    (p.1 n = false /\ r in engelerWithNumerals.boolBot) := by
simp only [chiNum, bits1, mem_setOf]
cases hp : p.1 n
* simp [hp]
* simp [hp]

theorem mem_chiNum_bits2 (p : CoinSpace) (n r : Nat) :
  r in chiNum engelerWithNumerals (bits2 p) n <->
    (p.2 n = true /\ r in engelerWithNumerals.boolTop) \/
    (p.2 n = false /\ r in engelerWithNumerals.boolBot) := by
simp only [chiNum, bits2, mem_setOf]
cases hp : p.2 n
* simp [hp]
* simp [hp]

theorem measurableSet_mem_chiNum_bits1 (n r : Nat) :
  MeasurableSet {p : CoinSpace | r in chiNum engelerWithNumerals (bits1 p) n} := by
have hset :
  {p : CoinSpace | r in chiNum engelerWithNumerals (bits1 p) n} =
    (if r in engelerWithNumerals.boolTop then D1 n true else ({ } : Set CoinSpace)) U
    (if r in engelerWithNumerals.boolBot then D1 n false else ({ } : Set CoinSpace)) := by
ext p
simp only [mem_union, mem_ite, mem_empty_iff_false, mem_setOf, D1]
rw [mem_chiNum_bits1]
tauto
rw [hset]
refine MeasurableSet.union ?_ ?_
* by_cases hT : r in engelerWithNumerals.boolTop
* simp [hT] using measurableSet_D1 n true

```



```

    * simp [hT]
    * by_cases hB : r in engelerWithNumerals.boolBot
    * simp [hB] using measurableSet_D1 n false
    * simp [hB]

theorem measurableSet_mem_chiNum_bits2 (n r : Nat) :
  MeasurableSet {p : CoinSpace | r in chiNum engelerWithNumerals (bits2 p) n} := by
  have hset :
    {p : CoinSpace | r in chiNum engelerWithNumerals (bits2 p) n} =
      (if r in engelerWithNumerals.boolTop then D2 n true else ({} : Set CoinSpace)) U
      (if r in engelerWithNumerals.boolBot then D2 n false else ({} : Set CoinSpace)) := by
    ext p
    simp only [mem_union, mem_ite, mem_empty_iff_false, mem_setOf, D2]
    rw [mem_chiNum_bits2]
    tauto
  rw [hset]
  refine MeasurableSet.union ?_ ?_
  * by_cases hT : r in engelerWithNumerals.boolTop
  * simp [hT] using measurableSet_D2 n true
  * simp [hT]
  * by_cases hB : r in engelerWithNumerals.boolBot
  * simp [hB] using measurableSet_D2 n false
  * simp [hB]

theorem measurableSet_mem_gbar_bits1 (r : Nat) (K : Finset Nat) :
  MeasurableSet {p : CoinSpace | r in gbar (bits1 p) (K : Set Nat)} := by
  have hset :
    {p : CoinSpace | r in gbar (bits1 p) (K : Set Nat)} =
      ? n : Nat, if n in numeralFingerprint (K : Set Nat) then
        {p : CoinSpace | r in chiNum engelerWithNumerals (bits1 p) n}
      else ({} : Set CoinSpace) := by
    ext p
    simp only [mem_iUnion, mem_ite, mem_empty_iff_false, mem_setOf]
    constructor
    * intro hr
    obtain <n, hn, hrmem> := (mem_gbar_iff (bits1 p) (K : Set Nat) r).mp hr
    exact <n, by simp [hn, hrmem]>
    * intro <n, hn>
    by_cases h? : n in numeralFingerprint (K : Set Nat)
    * simp [h?] at hn
    exact (mem_gbar_iff (bits1 p) (K : Set Nat) r).mpr <n, h?, hn>
    * simp [h?] at hn
  rw [hset]
  refine MeasurableSet.iUnion fun n => ?_
  by_cases h? : n in numeralFingerprint (K : Set Nat)
  * simp [h?] using measurableSet_mem_chiNum_bits1 n r
  * simp [h?]

theorem measurableSet_mem_gbar_bits2 (r : Nat) (K : Finset Nat) :
  MeasurableSet {p : CoinSpace | r in gbar (bits2 p) (K : Set Nat)} := by
  have hset :
    {p : CoinSpace | r in gbar (bits2 p) (K : Set Nat)} =
      ? n : Nat, if n in numeralFingerprint (K : Set Nat) then
        {p : CoinSpace | r in chiNum engelerWithNumerals (bits2 p) n}
      else ({} : Set CoinSpace) := by
    ext p
    simp only [mem_iUnion, mem_ite, mem_empty_iff_false, mem_setOf]
    constructor
    * intro hr
    obtain <n, hn, hrmem> := (mem_gbar_iff (bits2 p) (K : Set Nat) r).mp hr
    exact <n, by simp [hn, hrmem]>
    * intro <n, hn>
    by_cases h? : n in numeralFingerprint (K : Set Nat)

```

```

    * simp [h?] at hn
    exact (mem_gbar_iff (bits2 p) (K : Set Nat) r).mpr <n, h?, hn>
    * simp [h?] at hn
  rw [hset]
  refine MeasurableSet.iUnion fun n => ?_
  by_cases h? : n in numeralFingerprint (K : Set Nat)
  * simp [h?] using measurableSet_mem_chiNum_bits2 n r
  * simp [h?]

theorem measurableSet_chiOracle_bits1 (q : Nat) :
  MeasurableSet {p : CoinSpace | q in chiOracle (bits1 p)} := by
  have hset :
    {p : CoinSpace | q in chiOracle (bits1 p)} =
      ? K : Finset Nat, ? r : Nat,
      if q = engelerPair (K, r) then
        {p : CoinSpace | r in gbar (bits1 p) (K : Set Nat)}
      else ({ } : Set CoinSpace) := by
  ext p
  simp only [mem_iUnion, mem_ite, mem_empty_iff_false, mem_setOf]
  constructor
  * intro hq
    obtain <K, r, heq, hr> := (mem_chiOracle_iff (bits1 p) q).mp hq
    exact <K, r, by simp [heq, hr]>
  * intro <K, r, h>
    by_cases heq : q = engelerPair (K, r)
    * simp [heq] at h
    exact (mem_chiOracle_iff (bits1 p) q).mpr <K, r, heq, h>
    * simp [heq] at h
  rw [hset]
  refine MeasurableSet.iUnion fun K => MeasurableSet.iUnion fun r => ?_
  by_cases heq : q = engelerPair (K, r)
  * simp [heq] using measurableSet_mem_gbar_bits1 r K
  * simp [heq]

theorem measurableSet_chiOracle_bits2 (q : Nat) :
  MeasurableSet {p : CoinSpace | q in chiOracle (bits2 p)} := by
  have hset :
    {p : CoinSpace | q in chiOracle (bits2 p)} =
      ? K : Finset Nat, ? r : Nat,
      if q = engelerPair (K, r) then
        {p : CoinSpace | r in gbar (bits2 p) (K : Set Nat)}
      else ({ } : Set CoinSpace) := by
  ext p
  simp only [mem_iUnion, mem_ite, mem_empty_iff_false, mem_setOf]
  constructor
  * intro hq
    obtain <K, r, heq, hr> := (mem_chiOracle_iff (bits2 p) q).mp hq
    exact <K, r, by simp [heq, hr]>
  * intro <K, r, h>
    by_cases heq : q = engelerPair (K, r)
    * simp [heq] at h
    exact (mem_chiOracle_iff (bits2 p) q).mpr <K, r, heq, h>
    * simp [heq] at h
  rw [hset]
  refine MeasurableSet.iUnion fun K => MeasurableSet.iUnion fun r => ?_
  by_cases heq : q = engelerPair (K, r)
  * simp [heq] using measurableSet_mem_gbar_bits2 r K
  * simp [heq]

noncomputable def coinChi1 : CoinSpace -> Set Nat := fun p => chiOracle (bits1 p)

noncomputable def coinChi2 : CoinSpace -> Set Nat := fun p => chiOracle (bits2 p)

```

```

theorem coinChi1_isL0 : IsL0 coinChi1 := fun q => by
  change MeasurableSet (coinChi1 ^-1' posBasic q)
  have : coinChi1 ^-1' posBasic q = {p : CoinSpace | q in chiOracle (bits1 p)} := by
    ext p
    simp [coinChi1, posBasic]
  rw [this]
  exact measurableSet_chiOracle_bits1 q

theorem coinChi2_isL0 : IsL0 coinChi2 := fun q => by
  change MeasurableSet (coinChi2 ^-1' posBasic q)
  have : coinChi2 ^-1' posBasic q = {p : CoinSpace | q in chiOracle (bits2 p)} := by
    ext p
    simp [coinChi2, posBasic]
  rw [this]
  exact measurableSet_chiOracle_bits2 q

noncomputable def coinChi1Fun : LOFun CoinSpace Nat := <coinChi1, coinChi1_isL0>

noncomputable def coinChi2Fun : LOFun CoinSpace Nat := <coinChi2, coinChi2_isL0>

/-- Paper `d_1` in P^A(check E): `G_X` of the fiberwise Lemma 35(ii) oracle. -/
noncomputable def coinD1 : ASubset coinAlgebra Nat :=
  G_X_measure coinMeasure (LO.mk_measure coinMeasure coinChi1Fun)

/-- Paper `d_2` in P^A(check E): -/
noncomputable def coinD2 : ASubset coinAlgebra Nat :=
  G_X_measure coinMeasure (LO.mk_measure coinMeasure coinChi2Fun)

/-- Paper `a_1` with `[a_1] = G_X^{-1}(d_1)` -/
noncomputable def coinA1Fun : LOFun CoinSpace Nat :=
  G_X_measure_inv coinMeasure coinD1

/-- Paper `a_2` with `[a_2] = G_X^{-1}(d_2)` -/
noncomputable def coinA2Fun : LOFun CoinSpace Nat :=
  G_X_measure_inv coinMeasure coinD2

theorem coinD1_eq_G_X_inv :
  G_X_measure coinMeasure (LO.mk_measure coinMeasure coinA1Fun) = coinD1 :=
  G_X_measure_inv_right coinMeasure coinD1

theorem coinD2_eq_G_X_inv :
  G_X_measure coinMeasure (LO.mk_measure coinMeasure coinA2Fun) = coinD2 :=
  G_X_measure_inv_right coinMeasure coinD2

theorem eqB_G_X_measure_mk {Y : Type*} [Countable Y]
  (a b : LOFun CoinSpace Y) :
  eqB (G_X_measure coinMeasure (LO.mk_measure coinMeasure a))
    (G_X_measure coinMeasure (LO.mk_measure coinMeasure b)) =
  MeasureAlgebra.mk coinMeasure (10Eq a.val b.val)
    (measurableSet_10Eq a.property b.property) := by
  rw [eqB, G_X_measure_le, G_X_measure_le, LO.le_measure_mk, LO.le_measure_mk,
    MeasureAlgebra.inf_mk]
  refine (MeasureAlgebra.mk_eq_iff coinMeasure).mpr ?_
  have : 10Le a.val b.val I 10Le b.val a.val = 10Eq a.val b.val :=
    (10Eq_eq_le a.val b.val).symm
  simp [this, symmDiff_self]

noncomputable def constL0 (S : Set Nat) : LOFun CoinSpace Nat :=
  <constRV (X := CoinSpace) S, constRV_isL0 (X := CoinSpace) S>

noncomputable def appChi1L0 (S : Set Nat) : LOFun CoinSpace Nat :=
  <10App engelerPair coinChi1 (constRV (X := CoinSpace) S),
    10App_isL0 engelerPair coinChi1_isL0 (constRV_isL0 (X := CoinSpace) S)>

```

```

noncomputable def appChi2L0 (S : Set Nat) : L0Fun CoinSpace Nat :=
  <l0App engelerPair coinChi2 (constRV (X := CoinSpace) S),
    l0App_isL0 engelerPair coinChi2_isL0 (constRV_isL0 (X := CoinSpace) S)>

theorem checkSet_eq_G_X (S : Set Nat) :
  checkSet (A := coinAlgebra) S =
    G_X_measure coinMeasure (L0.mk_measure coinMeasure (constL0 S)) :=
  (lemma_41_measure (Y := Nat) coinMeasure S).symm

theorem l0App_coinChi1_numeral (n : Nat) (p : CoinSpace) :
  l0App engelerPair coinChi1
    (constRV (X := CoinSpace) (engelerWithNumerals.numeral n)) p =
  chiNum engelerWithNumerals (bits1 p) n := by
  change (engelerReflexiveDcpo engelerPair engelerPair_injective).funMap
    (chiOracle (bits1 p)) (engelerWithNumerals.numeral n) =
  chiNum engelerWithNumerals (bits1 p) n
  exact chiOracle_spec (bits1 p) n

theorem l0App_coinChi2_numeral (n : Nat) (p : CoinSpace) :
  l0App engelerPair coinChi2
    (constRV (X := CoinSpace) (engelerWithNumerals.numeral n)) p =
  chiNum engelerWithNumerals (bits2 p) n := by
  change (engelerReflexiveDcpo engelerPair engelerPair_injective).funMap
    (chiOracle (bits2 p)) (engelerWithNumerals.numeral n) =
  chiNum engelerWithNumerals (bits2 p) n
  exact chiOracle_spec (bits2 p) n

theorem engelerApp_funMap (F X : Set Nat) :
  engelerApp engelerPair F X =
    (engelerReflexiveDcpo engelerPair engelerPair_injective).funMap F X :=
  rfl

theorem appCoin_d1_of (S : Set Nat) :
  appCoin coinD1 (checkSet S) =
    G_X_measure coinMeasure (L0.mk_measure coinMeasure (appChi1L0 S)) := by
  have h40 := proposition_40_measure (E := Nat) coinMeasure engelerPair
    (L0.mk_measure coinMeasure coinChi1Fun)
    (L0.mk_measure coinMeasure (constL0 S))
  rw [ <- checkSet_eq_G_X ] at h40
  have happ := L0.app_measure_mk coinMeasure engelerPair coinChi1Fun (constL0 S)
  rw [happ] at h40
  exact h40.symm

theorem appCoin_d2_of (S : Set Nat) :
  appCoin coinD2 (checkSet S) =
    G_X_measure coinMeasure (L0.mk_measure coinMeasure (appChi2L0 S)) := by
  have h40 := proposition_40_measure (E := Nat) coinMeasure engelerPair
    (L0.mk_measure coinMeasure coinChi2Fun)
    (L0.mk_measure coinMeasure (constL0 S))
  rw [ <- checkSet_eq_G_X ] at h40
  have happ := L0.app_measure_mk coinMeasure engelerPair coinChi2Fun (constL0 S)
  rw [happ] at h40
  exact h40.symm

theorem appCoin_d1_numeral (n : Nat) :
  appCoin coinD1 (checkSet (engelerWithNumerals.numeral n)) =
    G_X_measure coinMeasure (L0.mk_measure coinMeasure
      (appChi1L0 (engelerWithNumerals.numeral n))) :=
  appCoin_d1_of (engelerWithNumerals.numeral n)

theorem appCoin_d2_numeral (n : Nat) :
  appCoin coinD2 (checkSet (engelerWithNumerals.numeral n)) =

```

```

      G_X_measure coinMeasure (L0.mk_measure coinMeasure
        (appChi2L0 (engelerWithNumerals.numeral n))) :=
appCoin_d2_of (engelerWithNumerals.numeral n)

theorem coinD1_eqB_true (n : Nat) :
  eqB (appCoin coinD1 (checkSet (engelerWithNumerals.numeral n)))
    (checkSet engelerWithNumerals.boolTop) = memB n coinS1 := by
  rw [appCoin_d1_of, checkSet_eq_G_X, eqB_G_X_measure_mk]
  refine (MeasureAlgebra.mk_eq_iff coinMeasure).mpr ?_
  have hset :
    l0Eq (appChi1L0 (engelerWithNumerals.numeral n)).val
      (constL0 engelerWithNumerals.boolTop).val =
    D1 n true := by
  ext p
  simp only [l0Eq, mem_setOf, D1, appChi1L0, constL0, constRV]
  rw [l0App_coinChi1_numeral]
  exact chiNum_eq_boolTop (bits1 p) n
  simp [hset, coinS1, D1, bits1, symmDiff_self]

theorem coinD1_eqB_false (n : Nat) :
  eqB (appCoin coinD1 (checkSet (engelerWithNumerals.numeral n)))
    (checkSet engelerWithNumerals.boolBot) = (memB n coinS1)? := by
  rw [appCoin_d1_of, checkSet_eq_G_X, eqB_G_X_measure_mk]

```

Lean 4 source (lines 1201–1600)

```

  have hset :
    l0Eq (appChi1L0 (engelerWithNumerals.numeral n)).val
      (constL0 engelerWithNumerals.boolBot).val =
    (D1 n true)? := by
  ext p
  simp only [l0Eq, mem_setOf, D1, appChi1L0, constL0, constRV, mem_compl_iff]
  rw [l0App_coinChi1_numeral, chiNum_eq_boolBot]
  simp [bits1]
  rw [memB_coinS1, MeasureAlgebra.compl_mk]
  exact MeasureAlgebra.mk_congr coinMeasure hset

theorem coinD2_eqB_true (n : Nat) :
  eqB (appCoin coinD2 (checkSet (engelerWithNumerals.numeral n)))
    (checkSet engelerWithNumerals.boolTop) = memB n coinS2 := by
  rw [appCoin_d2_of, checkSet_eq_G_X, eqB_G_X_measure_mk]
  refine (MeasureAlgebra.mk_eq_iff coinMeasure).mpr ?_
  have hset :
    l0Eq (appChi2L0 (engelerWithNumerals.numeral n)).val
      (constL0 engelerWithNumerals.boolTop).val =
    D2 n true := by
  ext p
  simp only [l0Eq, mem_setOf, D2, appChi2L0, constL0, constRV]
  rw [l0App_coinChi2_numeral]
  exact chiNum_eq_boolTop (bits2 p) n
  simp [hset, coinS2, D2, bits2, symmDiff_self]

theorem coinD2_eqB_false (n : Nat) :
  eqB (appCoin coinD2 (checkSet (engelerWithNumerals.numeral n)))
    (checkSet engelerWithNumerals.boolBot) = (memB n coinS2)? := by
  rw [appCoin_d2_of, checkSet_eq_G_X, eqB_G_X_measure_mk]
  have hset :
    l0Eq (appChi2L0 (engelerWithNumerals.numeral n)).val
      (constL0 engelerWithNumerals.boolBot).val =
    (D2 n true)? := by
  ext p
  simp only [l0Eq, mem_setOf, D2, appChi2L0, constL0, constRV, mem_compl_iff]
  rw [l0App_coinChi2_numeral, chiNum_eq_boolBot]
  simp [bits2]

```

```

rw [memB_coinS2, MeasureAlgebra.compl_mk]
exact MeasureAlgebra.mk_congr coinMeasure hset

theorem coinD1_oracle_true (n : Nat) :
  eqB (appCoin coinD1 (vaSubset (interpClosedVA (A := coinAlgebra) (churchNumN n))))
    (vaSubset (interpClosedVA (A := coinAlgebra) churchTrueN)) =
    memB n coinS1 := by
  have hnum := vaSubset_interpClosedVA (A := coinAlgebra) (churchNumN n)
    (churchNumN_fv n)
  have htop := vaSubset_interpClosedVA (A := coinAlgebra) churchTrueN churchTrueN_fv
  rw [hnum, htop]
  have hcn : interpClosed
    (engelerReflexiveDcpo engelerPair engelerPair_injective) (churchNumN n) =
    engelerWithNumerals.numeral n := by
  rw [ <- churchNum_interpClosed_eq_churchNumN]
  rfl
  have ht : interpClosed
    (engelerReflexiveDcpo engelerPair engelerPair_injective) churchTrueN =
    engelerWithNumerals.boolTop :=
  (churchTrue_interpClosed_eq_churchTrueN
    (engelerReflexiveDcpo engelerPair engelerPair_injective)).symm
  rw [hcn, ht, coinD1_eqB_true]

theorem coinD1_oracle_false (n : Nat) :
  eqB (appCoin coinD1 (vaSubset (interpClosedVA (A := coinAlgebra) (churchNumN n))))
    (vaSubset (interpClosedVA (A := coinAlgebra) churchFalseN)) =
    (memB n coinS1)? := by
  have hnum := vaSubset_interpClosedVA (A := coinAlgebra) (churchNumN n)
    (churchNumN_fv n)
  have hbot := vaSubset_interpClosedVA (A := coinAlgebra) churchFalseN churchFalseN_fv
  rw [hnum, hbot]
  have hcn : interpClosed
    (engelerReflexiveDcpo engelerPair engelerPair_injective) (churchNumN n) =
    engelerWithNumerals.numeral n := by
  rw [ <- churchNum_interpClosed_eq_churchNumN]
  rfl
  have hb : interpClosed
    (engelerReflexiveDcpo engelerPair engelerPair_injective) churchFalseN =
    engelerWithNumerals.boolBot :=
  (churchFalse_interpClosed_eq_churchFalseN
    (engelerReflexiveDcpo engelerPair engelerPair_injective)).symm
  rw [hcn, hb, coinD1_eqB_false]

theorem coinD2_oracle_true (n : Nat) :
  eqB (appCoin coinD2 (vaSubset (interpClosedVA (A := coinAlgebra) (churchNumN n))))
    (vaSubset (interpClosedVA (A := coinAlgebra) churchTrueN)) =
    memB n coinS2 := by
  have hnum := vaSubset_interpClosedVA (A := coinAlgebra) (churchNumN n)
    (churchNumN_fv n)
  have htop := vaSubset_interpClosedVA (A := coinAlgebra) churchTrueN churchTrueN_fv
  rw [hnum, htop]
  have hcn : interpClosed
    (engelerReflexiveDcpo engelerPair engelerPair_injective) (churchNumN n) =
    engelerWithNumerals.numeral n := by
  rw [ <- churchNum_interpClosed_eq_churchNumN]
  rfl
  have ht : interpClosed
    (engelerReflexiveDcpo engelerPair engelerPair_injective) churchTrueN =
    engelerWithNumerals.boolTop :=
  (churchTrue_interpClosed_eq_churchTrueN
    (engelerReflexiveDcpo engelerPair engelerPair_injective)).symm
  rw [hcn, ht, coinD2_eqB_true]

```

```

theorem coinD2_oracle_false (n : Nat) :
  eqB (appCoin coinD2 (vaSubset (interpClosedVA (A := coinAlgebra) (churchNumN n))))
    (vaSubset (interpClosedVA (A := coinAlgebra) churchFalseN)) =
    (memB n coinS2)? := by
  have hnum := vaSubset_interpClosedVA (A := coinAlgebra) (churchNumN n)
    (churchNumN_fv n)
  have hbot := vaSubset_interpClosedVA (A := coinAlgebra) churchFalseN churchFalseN_fv
  rw [hnum, hbot]
  have hcn : interpClosed
    (engelerReflexiveDcpo engelerPair engelerPair_injective) (churchNumN n) =
    engelerWithNumerals.numeral n := by
  rw [ <- churchNum_interpClosed_eq_churchNumN]
  rfl
  have hb : interpClosed
    (engelerReflexiveDcpo engelerPair engelerPair_injective) churchFalseN =
    engelerWithNumerals.boolBot :=
  (churchFalse_interpClosed_eq_churchFalseN
    (engelerReflexiveDcpo engelerPair engelerPair_injective)).symm
  rw [hcn, hb, coinD2_eqB_false]

theorem interpClosed_mapsNumerals (M : Lam Nat) (hM : MapsNumerals M) (n : Nat) :
  interpClosed engelerWithNumerals.toReflexiveDcpo (M.app (churchNumN n)) =
  engelerWithNumerals.numeral (mapsNumeralsFun M hM n) :=
  mapsNumerals_interp_numeral hM n

theorem appCoin_d2_term (S : Set Nat) :
  appCoin coinD2 (checkSet S) =
  G_X_measure coinMeasure (L0.mk_measure coinMeasure (appChi2L0 S)) :=
  appCoin_d2_of S

theorem appCoin_d1_term (S : Set Nat) :
  appCoin coinD1 (checkSet S) =
  G_X_measure coinMeasure (L0.mk_measure coinMeasure (appChi1L0 S)) :=
  appCoin_d1_of S

theorem l0App_coinChi2_interp (M : Lam Nat) (hM : MapsNumerals M) (n : Nat)
  (p : CoinSpace) :
  l0App engelerPair coinChi2
    (constRV (X := CoinSpace)
      (interpClosed engelerWithNumerals.toReflexiveDcpo
        (M.app (churchNumN n)))) p =
  chiNum engelerWithNumerals (bits2 p) (mapsNumeralsFun M hM n) := by
  rw [interpClosed_mapsNumerals M hM n]
  exact l0App_coinChi2_numeral (mapsNumeralsFun M hM n) p

theorem coinD2_app_maps_eqB (M : Lam Nat) (hM : MapsNumerals M) (n : Nat) :
  eqB (appCoin coinD2 (checkSet
    (interpClosed engelerWithNumerals.toReflexiveDcpo
      (M.app (churchNumN n)))))
    (appCoin coinD1 (checkSet (engelerWithNumerals.numeral n))) =
  (coinS2 (mapsNumeralsFun M hM n) ? coinS1 n) sqcap
  (coinS1 n ? coinS2 (mapsNumeralsFun M hM n)) := by
  set f := mapsNumeralsFun M hM
  rw [appCoin_d2_term, appCoin_d1_term, eqB_G_X_measure_mk]
  have hset :
    l0Eq (appChi2L0 (interpClosed engelerWithNumerals.toReflexiveDcpo
      (M.app (churchNumN n)))).val
      (appChi1L0 (engelerWithNumerals.numeral n)).val =
    (agreeBit f n true U agreeBit f n false) := by
  ext p
  simp only [l0Eq, mem_setOf, mem_union, agreeBit, D1, D2, mem_inter_iff,
    mem_setOf_eq, appChi2L0, appChi1L0]
  rw [l0App_coinChi2_interp M hM n, l0App_coinChi1_numeral]

```

```

have hiff :
  chiNum engelerWithNumerals (bits2 p) (f n) =
    chiNum engelerWithNumerals (bits1 p) n <->
      (n in bits1 p <-> f n in bits2 p) :=
        (chiNum_eq_iff engelerWithNumerals (bits2 p) (bits1 p) (f n) n).trans Iff.comm
constructor
* intro heq
  have hmem := hiff.mp heq
  cases hp1 : p.1 n <=> cases hp2 : p.2 (f n)
  * simp [bits1, bits2, hp1, hp2] at hmem |-
  * simp [bits1, bits2, hp1, hp2] at hmem
  * simp [bits1, bits2, hp1, hp2] at hmem
  * simp [hp1, hp2]
* intro h
  apply hiff.mpr
  cases hp1 : p.1 n <=> cases hp2 : p.2 (f n)
  * simp [bits1, bits2, hp1, hp2] at h |-
  * simp [bits1, bits2, hp1, hp2] at h |-
  * simp [bits1, bits2, hp1, hp2] at h |-
  * simp [bits1, bits2, hp1, hp2] at h |-
rw [inf_comm, coinS1_iff_coinS2_eq_mk]
exact MeasureAlgebra.mk_congr coinMeasure hset

theorem coinD2_app_maps_eqB_va (M : Lam Nat) (hM : MapsNumerals M) (n : Nat) :
  eqB (appCoin coinD2 (vaSubset (interpClosedVA (A := coinAlgebra)
    (M.app (churchNumN n)))))
    (appCoin coinD1 (vaSubset (interpClosedVA (A := coinAlgebra)
    (churchNumN n))))) =
    (coinS2 (mapsNumeralsFun M hM n) ? coinS1 n) sqcap
    (coinS1 n ? coinS2 (mapsNumeralsFun M hM n)) := by
have hMc1 : (M.app (churchNumN n)).fv = {} := by
  simp [Lam.fv, hM.1, churchNumN_fv]
have hMc := vaSubset_interpClosedVA (A := coinAlgebra) (M.app (churchNumN n)) hMc1
have hcn := vaSubset_interpClosedVA (A := coinAlgebra) (churchNumN n)
  (churchNumN_fv n)
rw [hMc, hcn]
convert coinD2_app_maps_eqB M hM n
* rfl
* rw [← churchNum_interpClosed_eq_churchNumN]
  rfl

theorem coinD2_app_maps_iInf_bot (M : Lam Nat) (hM : MapsNumerals M) :
  (? n, eqB (appCoin coinD2 (checkSet
    (interpClosed engelerWithNumerals.toReflexiveDcpo
    (M.app (churchNumN n)))))
    (appCoin coinD1 (checkSet (engelerWithNumerals.numeral n))))) = False := by
  simp_rw [coinD2_app_maps_eqB M hM, inf_comm]
  exact (proposition_42_algebra (mapsNumeralsFun M hM)).2.2.1

theorem l0App_coinChi1_interp (M : Lam Nat) (hM : MapsNumerals M) (n : Nat)
  (p : CoinSpace) :
  l0App engelerPair coinChi1
    (constRV (X := CoinSpace)
      (interpClosed engelerWithNumerals.toReflexiveDcpo
        (M.app (churchNumN n))))) p =
    chiNum engelerWithNumerals (bits1 p) (mapsNumeralsFun M hM n) := by
  rw [interpClosed_mapsNumerals M hM n]
  exact l0App_coinChi1_numeral (mapsNumeralsFun M hM n) p

theorem coinD1_app_maps_eqB (M : Lam Nat) (hM : MapsNumerals M) (n : Nat) :
  eqB (appCoin coinD1 (checkSet
    (interpClosed engelerWithNumerals.toReflexiveDcpo
    (M.app (churchNumN n)))))

```



```

      (appCoin coinD2 (checkSet (engelerWithNumerals.numeral n))) =
      (coinS1 (mapsNumeralsFun M hM n) ? coinS2 n) sqcap
      (coinS2 n ? coinS1 (mapsNumeralsFun M hM n)) := by
set f := mapsNumeralsFun M hM
rw [appCoin_d1_term, appCoin_d2_term, eqB_G_X_measure_mk]
have hset :
  l0Eq (appChi1L0 (interpClosed engelerWithNumerals.toReflexiveDcpo
    (M.app (churchNumN n))))).val
    (appChi2L0 (engelerWithNumerals.numeral n)).val =
  ((D2 n true I D1 (f n) true) U (D2 n false I D1 (f n) false)) := by
ext p
simp only [l0Eq, mem_setOf, mem_union, D1, D2, mem_inter_iff, mem_setOf_eq,
  appChi1L0, appChi2L0]
rw [l0App_coinChi1_interp M hM n, l0App_coinChi2_numeral]
have hiff :
  chiNum engelerWithNumerals (bits1 p) (f n) =
  chiNum engelerWithNumerals (bits2 p) n <->
  (n in bits2 p <-> f n in bits1 p) :=
  (chiNum_eq_iff engelerWithNumerals (bits1 p) (bits2 p) (f n) n).trans Iff.comm
constructor
* intro heq
  have hmem := hiff.mp heq
  cases hp2 : p.2 n <=> cases hp1 : p.1 (f n)
  * simp [bits1, bits2, hp1, hp2] at hmem |-
  * simp [bits1, bits2, hp1, hp2] at hmem
  * simp [bits1, bits2, hp1, hp2] at hmem
  * simp [hp1, hp2]
* intro h
  apply hiff.mpr
  cases hp2 : p.2 n <=> cases hp1 : p.1 (f n)
  * simp [bits1, bits2, hp1, hp2] at h |-
  * simp [bits1, bits2, hp1, hp2] at h |-
  * simp [bits1, bits2, hp1, hp2] at h |-
  * simp [bits1, bits2, hp1, hp2] at h |-
rw [inf_comm, coinS2_iff_coinS1_eq_mk]
exact MeasureAlgebra.mk_congr coinMeasure hset

theorem coinD1_app_maps_iInf_bot (M : Lam Nat) (hM : MapsNumerals M) :
  (? n, eqB (appCoin coinD1 (checkSet
    (interpClosed engelerWithNumerals.toReflexiveDcpo
      (M.app (churchNumN n)))))
    (appCoin coinD2 (checkSet (engelerWithNumerals.numeral n)))) = False := by
simp_rw [coinD1_app_maps_eqB M hM, inf_comm]
exact (proposition_42_algebra (mapsNumeralsFun M hM)).2.2.2

theorem appCoin_of_inv (d : ASubset coinAlgebra Nat) (S : Set Nat) :
  appCoin d (checkSet S) =
  G_X_measure coinMeasure (L0.app_measure coinMeasure engelerPair
    (L0.mk_measure coinMeasure (G_X_measure_inv coinMeasure d))
    (L0.mk_measure coinMeasure (constL0 S))) := by
have hd : G_X_measure coinMeasure (L0.mk_measure coinMeasure
  (G_X_measure_inv coinMeasure d)) = d :=
  G_X_measure_inv_right coinMeasure d
have h := proposition_40_measure (E := Nat) coinMeasure engelerPair
  (L0.mk_measure coinMeasure (G_X_measure_inv coinMeasure d))
  (L0.mk_measure coinMeasure (constL0 S))
rw [hd, <- checkSet_eq_G_X] at h
exact h.symm

noncomputable def invAppFun (d : ASubset coinAlgebra Nat) (S : Set Nat) :
  L0Fun CoinSpace Nat :=
  <l0App engelerPair (G_X_measure_inv coinMeasure d).val
    (constRV (X := CoinSpace) S),

```

```

10App_isL0 engelerPair (G_X_measure_inv coinMeasure d).property
  (constRV_isL0 (X := CoinSpace) S)>

theorem appCoin_of_inv_mk (d : ASubset coinAlgebra Nat) (S : Set Nat) :
  appCoin d (checkSet S) =
    G_X_measure coinMeasure (L0.mk_measure coinMeasure (invAppFun d S)) := by
  rw [appCoin_of_inv]
  have happ := L0.app_measure_mk coinMeasure engelerPair
    (G_X_measure_inv coinMeasure d) (constL0 S)
  rw [happ]
  rfl

theorem eqB_appCoin_inv (d_2 d_1 : ASubset coinAlgebra Nat) (S T : Set Nat) :
  eqB (appCoin d_2 (checkSet S)) (appCoin d_1 (checkSet T)) =
    MeasureAlgebra.mk coinMeasure
      (l0Eq (invAppFun d_2 S).val (invAppFun d_1 T).val)
      (measurableSet_l0Eq (invAppFun d_2 S).property
        (invAppFun d_1 T).property) := by
  rw [appCoin_of_inv_mk, appCoin_of_inv_mk, eqB_G_X_measure_mk]

noncomputable def mapsAgreeSet (M : Lam Nat) (hM : MapsNumerals M) :
  Set CoinSpace :=
  ? n, {x | engelerApp engelerPair (coinA2Fun.val x)
    (interpClosed engelerWithNumerals.toReflexiveDcpo (M.app (churchNumN n))) =
    engelerApp engelerPair (coinA1Fun.val x) (engelerWithNumerals.numeral n)}

theorem mapsAgreeSet_eq_iInter (M : Lam Nat) (hM : MapsNumerals M) :
  mapsAgreeSet M hM =
    ? n, l0Eq (invAppFun coinD2
      (interpClosed engelerWithNumerals.toReflexiveDcpo
        (M.app (churchNumN n))))
      (invAppFun coinD1 (engelerWithNumerals.numeral n)).val := by
  ext x
  simp only [mapsAgreeSet, mem_iInter, mem_setOf, l0Eq, invAppFun, l0App, constRV]
  rfl

theorem measurableSet_mapsAgreeSet (M : Lam Nat) (hM : MapsNumerals M) :
  MeasurableSet (mapsAgreeSet M hM) := by
  rw [mapsAgreeSet_eq_iInter]
  exact MeasurableSet.iInter fun n =>
    measurableSet_l0Eq
      (invAppFun coinD2 (interpClosed engelerWithNumerals.toReflexiveDcpo
        (M.app (churchNumN n))))
      (invAppFun coinD1 (engelerWithNumerals.numeral n)).property

theorem mapsAgreeSet_mk_bot (M : Lam Nat) (hM : MapsNumerals M) :
  MeasureAlgebra.mk coinMeasure (mapsAgreeSet M hM)
    (measurableSet_mapsAgreeSet M hM) = False := by
  have hinf := coinD2_app_maps_iInf_bot M hM
  have hcongr :
    (? n, eqB (appCoin coinD2 (checkSet
      (interpClosed engelerWithNumerals.toReflexiveDcpo
        (M.app (churchNumN n))))
      (appCoin coinD1 (checkSet (engelerWithNumerals.numeral n)))) =
      (? n, MeasureAlgebra.mk coinMeasure
        (l0Eq (invAppFun coinD2
          (interpClosed engelerWithNumerals.toReflexiveDcpo
            (M.app (churchNumN n))))
          (invAppFun coinD1 (engelerWithNumerals.numeral n)).val)
        (measurableSet_l0Eq
          (invAppFun coinD2 (interpClosed engelerWithNumerals.toReflexiveDcpo
            (M.app (churchNumN n))))
          (invAppFun coinD1 (engelerWithNumerals.numeral n)).property)) :=

```

```

    iInf_congr fun n => eqB_appCoin_inv coinD2 coinD1 _ _
  rw [hcongr] at hinf
  have hmk := MeasureAlgebra.iInf_mk coinMeasure
    (fun n => l0Eq (invAppFun coinD2
      (interpClosed engelerWithNumerals.toReflexiveDcpo
        (M.app (churchNumN n))))).val
      (invAppFun coinD1 (engelerWithNumerals.numeral n)).val)
  (fun n => measurableSet_l0Eq
    (invAppFun coinD2 (interpClosed engelerWithNumerals.toReflexiveDcpo
      (M.app (churchNumN n))))).property
    (invAppFun coinD1 (engelerWithNumerals.numeral n)).property)
  exact (MeasureAlgebra.mk_congr coinMeasure (mapsAgreeSet_eq_iInter M hM)).trans
    (hmk.symm.trans hinf)

theorem mapsAgreeSet_null (M : Lam Nat) (hM : MapsNumerals M) :
  coinMeasure (mapsAgreeSet M hM) = 0 :=
  (MeasureAlgebra.mk_eq_bot coinMeasure).mp (mapsAgreeSet_mk_bot M hM)

noncomputable def mapsAgreeSet_swap (M : Lam Nat) (hM : MapsNumerals M) :
  Set CoinSpace :=
  ? n, {x | engelerApp engelerPair (coinA1Fun.val x)
    (interpClosed engelerWithNumerals.toReflexiveDcpo (M.app (churchNumN n))) =
    engelerApp engelerPair (coinA2Fun.val x) (engelerWithNumerals.numeral n)}

theorem mapsAgreeSet_swap_eq_iInter (M : Lam Nat) (hM : MapsNumerals M) :
  mapsAgreeSet_swap M hM =
  ? n, l0Eq (invAppFun coinD1
    (interpClosed engelerWithNumerals.toReflexiveDcpo
      (M.app (churchNumN n))))).val
    (invAppFun coinD2 (engelerWithNumerals.numeral n)).val := by
  ext x
  simp only [mapsAgreeSet_swap, mem_iInter, mem_setOf, l0Eq, invAppFun, l0App,
    constrRV]
  rfl

theorem measurableSet_mapsAgreeSet_swap (M : Lam Nat) (hM : MapsNumerals M) :
  MeasurableSet (mapsAgreeSet_swap M hM) := by
  rw [mapsAgreeSet_swap_eq_iInter]
  exact MeasurableSet.iInter fun n =>
    measurableSet_l0Eq
      (invAppFun coinD1 (interpClosed engelerWithNumerals.toReflexiveDcpo
        (M.app (churchNumN n))))).property
        (invAppFun coinD2 (engelerWithNumerals.numeral n)).property

theorem mapsAgreeSet_swap_mk_bot (M : Lam Nat) (hM : MapsNumerals M) :
  MeasureAlgebra.mk coinMeasure (mapsAgreeSet_swap M hM)
    (measurableSet_mapsAgreeSet_swap M hM) = False := by

```

Lean 4 source (lines 1601–2000)

```

  have hinf := coinD1_app_maps_iInf_bot M hM
  have hcongr :
    (? n, eqB (appCoin coinD1 (checkSet
      (interpClosed engelerWithNumerals.toReflexiveDcpo
        (M.app (churchNumN n))))))
      (appCoin coinD2 (checkSet (engelerWithNumerals.numeral n)))) =
    (? n, MeasureAlgebra.mk coinMeasure
      (l0Eq (invAppFun coinD1
        (interpClosed engelerWithNumerals.toReflexiveDcpo
          (M.app (churchNumN n))))).val
        (invAppFun coinD2 (engelerWithNumerals.numeral n)).val)
      (measurableSet_l0Eq
        (invAppFun coinD1 (interpClosed engelerWithNumerals.toReflexiveDcpo
          (M.app (churchNumN n))))).property

```

```

      (invAppFun coinD2 (engelerWithNumerals.numeral n)).property)) :=
    iInf_congr fun n => eqB_appCoin_inv coinD1 coinD2 _ _
  rw [hcongr] at hinf
  have hmk := MeasureAlgebra.iInf_mk coinMeasure
    (fun n => l0Eq (invAppFun coinD1
      (interpClosed engelerWithNumerals.toReflexiveDcpo
        (M.app (churchNumN n))))).val
      (invAppFun coinD2 (engelerWithNumerals.numeral n)).val)
    (fun n => measurableSet_l0Eq
      (invAppFun coinD1 (interpClosed engelerWithNumerals.toReflexiveDcpo
        (M.app (churchNumN n))))).property
      (invAppFun coinD2 (engelerWithNumerals.numeral n)).property)
  exact (MeasureAlgebra.mk_congr coinMeasure (mapsAgreeSet_swap_eq_iInter M hM)).trans
    (hmk.symm.trans hinf)

theorem mapsAgreeSet_swap_null (M : Lam Nat) (hM : MapsNumerals M) :
  coinMeasure (mapsAgreeSet_swap M hM) = 0 :=
  (MeasureAlgebra.mk_eq_bot coinMeasure).mp (mapsAgreeSet_swap_mk_bot M hM)

noncomputable def paperReductionNull : Set CoinSpace :=
  ? M : {M : Lam Nat // MapsNumerals M},
  mapsAgreeSet M.1 M.2 U mapsAgreeSet_swap M.1 M.2

theorem paperReductionNull_null : coinMeasure paperReductionNull = 0 := by
  haveI : Countable (Lam Nat) := Function.Injective.countable lamEncode_injective
  refine measure_iUnion_null fun M =>
    measure_union_null (mapsAgreeSet_null M.1 M.2) (mapsAgreeSet_swap_null M.1 M.2)

noncomputable def boolValSet1 : Set CoinSpace :=
  ? n, {x | engelerApp engelerPair (coinA1Fun.val x)
    (engelerWithNumerals.numeral n) =
    engelerWithNumerals.boolTop \ /
    engelerApp engelerPair (coinA1Fun.val x)
    (engelerWithNumerals.numeral n) =
    engelerWithNumerals.boolBot}

noncomputable def boolValSet2 : Set CoinSpace :=
  ? n, {x | engelerApp engelerPair (coinA2Fun.val x)
    (engelerWithNumerals.numeral n) =
    engelerWithNumerals.boolTop \ /
    engelerApp engelerPair (coinA2Fun.val x)
    (engelerWithNumerals.numeral n) =
    engelerWithNumerals.boolBot}

theorem boolValSlice1_eq (n : Nat) :
  {x : CoinSpace | engelerApp engelerPair (coinA1Fun.val x)
    (engelerWithNumerals.numeral n) = engelerWithNumerals.boolTop \ /
    engelerApp engelerPair (coinA1Fun.val x)
    (engelerWithNumerals.numeral n) = engelerWithNumerals.boolBot} =
  l0Eq (invAppFun coinD1 (engelerWithNumerals.numeral n)).val
    (constRV (X := CoinSpace) engelerWithNumerals.boolTop) U
  l0Eq (invAppFun coinD1 (engelerWithNumerals.numeral n)).val
    (constRV (X := CoinSpace) engelerWithNumerals.boolBot) := by
  ext x
  simp [l0Eq, invAppFun, l0App, constRV, coinA1Fun]

theorem boolValSlice2_eq (n : Nat) :
  {x : CoinSpace | engelerApp engelerPair (coinA2Fun.val x)
    (engelerWithNumerals.numeral n) = engelerWithNumerals.boolTop \ /
    engelerApp engelerPair (coinA2Fun.val x)
    (engelerWithNumerals.numeral n) = engelerWithNumerals.boolBot} =
  l0Eq (invAppFun coinD2 (engelerWithNumerals.numeral n)).val
    (constRV (X := CoinSpace) engelerWithNumerals.boolTop) U

```

```

    10Eq (invAppFun coinD2 (engelerWithNumerals.numeral n)).val
      (constRV (X := CoinSpace) engelerWithNumerals.boolBot) := by
  ext x
  simp [10Eq, invAppFun, 10App, constRV, coinA2Fun]

theorem measurableSet_boolValSlice1 (n : Nat) :
  MeasurableSet {x : CoinSpace | engelerApp engelerPair (coinA1Fun.val x)
    (engelerWithNumerals.numeral n) = engelerWithNumerals.boolTop \ /
    engelerApp engelerPair (coinA1Fun.val x)
    (engelerWithNumerals.numeral n) = engelerWithNumerals.boolBot} := by
  rw [boolValSlice1_eq]
  exact (measurableSet_10Eq
    (invAppFun coinD1 (engelerWithNumerals.numeral n)).property
    (constRV_isL0 (X := CoinSpace) engelerWithNumerals.boolTop)).union
    (measurableSet_10Eq
    (invAppFun coinD1 (engelerWithNumerals.numeral n)).property
    (constRV_isL0 (X := CoinSpace) engelerWithNumerals.boolBot))

theorem measurableSet_boolValSlice2 (n : Nat) :
  MeasurableSet {x : CoinSpace | engelerApp engelerPair (coinA2Fun.val x)
    (engelerWithNumerals.numeral n) = engelerWithNumerals.boolTop \ /
    engelerApp engelerPair (coinA2Fun.val x)
    (engelerWithNumerals.numeral n) = engelerWithNumerals.boolBot} := by
  rw [boolValSlice2_eq]
  exact (measurableSet_10Eq
    (invAppFun coinD2 (engelerWithNumerals.numeral n)).property
    (constRV_isL0 (X := CoinSpace) engelerWithNumerals.boolTop)).union
    (measurableSet_10Eq
    (invAppFun coinD2 (engelerWithNumerals.numeral n)).property
    (constRV_isL0 (X := CoinSpace) engelerWithNumerals.boolBot))

theorem measurableSet_boolValSet1 : MeasurableSet boolValSet1 :=
  MeasurableSet.iInter measurableSet_boolValSlice1

theorem measurableSet_boolValSet2 : MeasurableSet boolValSet2 :=
  MeasurableSet.iInter measurableSet_boolValSlice2

theorem eqB_appCoin_check (d : ASubset coinAlgebra Nat) (S T : Set Nat) :
  eqB (appCoin d (checkSet S)) (checkSet T) =
    MeasureAlgebra.mk coinMeasure
      (10Eq (invAppFun d S).val (constL0 T).val)
      (measurableSet_10Eq (invAppFun d S).property (constL0 T).property) := by
  rw [appCoin_of_inv_mk, checkSet_eq_G_X]
  exact eqB_G_X_measure_mk (invAppFun d S) (constL0 T)

theorem boolValSlice1_mk_top (n : Nat) :
  MeasureAlgebra.mk coinMeasure
    (10Eq (invAppFun coinD1 (engelerWithNumerals.numeral n)).val
      (constRV (X := CoinSpace) engelerWithNumerals.boolTop) U
      10Eq (invAppFun coinD1 (engelerWithNumerals.numeral n)).val
      (constRV (X := CoinSpace) engelerWithNumerals.boolBot))
    ((measurableSet_10Eq
      (invAppFun coinD1 (engelerWithNumerals.numeral n)).property
      (constRV_isL0 (X := CoinSpace) engelerWithNumerals.boolTop)).union
      (measurableSet_10Eq
      (invAppFun coinD1 (engelerWithNumerals.numeral n)).property
      (constRV_isL0 (X := CoinSpace) engelerWithNumerals.boolBot))) = top := by
  have h :
    eqB (appCoin coinD1 (checkSet (engelerWithNumerals.numeral n)))
      (checkSet engelerWithNumerals.boolTop) sqsup
    eqB (appCoin coinD1 (checkSet (engelerWithNumerals.numeral n)))
      (checkSet engelerWithNumerals.boolBot) = top := by
  rw [coinD1_eqB_true, coinD1_eqB_false]

```

```

    exact sup_compl_eq_top
  rw [eqB_appCoin_check, eqB_appCoin_check, MeasureAlgebra.sup_mk] at h
  exact h

theorem boolValSlice2_mk_top (n : Nat) :
  MeasureAlgebra.mk coinMeasure
    (l0Eq (invAppFun coinD2 (engelerWithNumerals.numeral n)).val
      (constRV (X := CoinSpace) engelerWithNumerals.boolTop) U
      l0Eq (invAppFun coinD2 (engelerWithNumerals.numeral n)).val
      (constRV (X := CoinSpace) engelerWithNumerals.boolBot)))
    ((measurableSet_l0Eq
      (invAppFun coinD2 (engelerWithNumerals.numeral n)).property
      (constRV_isL0 (X := CoinSpace) engelerWithNumerals.boolTop)).union
      (measurableSet_l0Eq
      (invAppFun coinD2 (engelerWithNumerals.numeral n)).property
      (constRV_isL0 (X := CoinSpace) engelerWithNumerals.boolBot))) = top := by
  have h :
    eqB (appCoin coinD2 (checkSet (engelerWithNumerals.numeral n)))
      (checkSet engelerWithNumerals.boolTop) sqsup
    eqB (appCoin coinD2 (checkSet (engelerWithNumerals.numeral n)))
      (checkSet engelerWithNumerals.boolBot) = top := by
  rw [coinD2_eqB_true, coinD2_eqB_false]
  exact sup_compl_eq_top
  rw [eqB_appCoin_check, eqB_appCoin_check, MeasureAlgebra.sup_mk] at h
  exact h

theorem boolValSet1_conull : coinMeasure boolValSet1? = 0 := by
  have hslice : forall n, coinMeasure
    ({x : CoinSpace | engelerApp engelerPair (coinA1Fun.val x)
      (engelerWithNumerals.numeral n) = engelerWithNumerals.boolTop \ /
      engelerApp engelerPair (coinA1Fun.val x)
      (engelerWithNumerals.numeral n) = engelerWithNumerals.boolBot} : Set CoinSpace)? = 0
    := by
  intro n
  have hmk :
    MeasureAlgebra.mk coinMeasure
      ({x : CoinSpace | engelerApp engelerPair (coinA1Fun.val x)
        (engelerWithNumerals.numeral n) = engelerWithNumerals.boolTop \ /
        engelerApp engelerPair (coinA1Fun.val x)
        (engelerWithNumerals.numeral n) = engelerWithNumerals.boolBot})
      (measurableSet_boolValSlice1 n) = top :=
    (MeasureAlgebra.mk_congr coinMeasure (boolValSlice1_eq n).symm).trans
      (boolValSlice1_mk_top n)
  exact (MeasureAlgebra.mk_eq_top coinMeasure).mp hmk
  have : boolValSet1? = ? n, ({x : CoinSpace | engelerApp engelerPair (coinA1Fun.val x)
    (engelerWithNumerals.numeral n) = engelerWithNumerals.boolTop \ /
    engelerApp engelerPair (coinA1Fun.val x)
    (engelerWithNumerals.numeral n) = engelerWithNumerals.boolBot} : Set CoinSpace)? := by
  ext x
  simp [boolValSet1]
  rw [this]
  exact measure_iUnion_null hslice

theorem boolValSet2_conull : coinMeasure boolValSet2? = 0 := by
  have hslice : forall n, coinMeasure
    ({x : CoinSpace | engelerApp engelerPair (coinA2Fun.val x)
      (engelerWithNumerals.numeral n) = engelerWithNumerals.boolTop \ /
      engelerApp engelerPair (coinA2Fun.val x)
      (engelerWithNumerals.numeral n) = engelerWithNumerals.boolBot} : Set CoinSpace)? = 0
    := by
  intro n
  have hmk :
    MeasureAlgebra.mk coinMeasure

```

```

      ({x : CoinSpace | engelerApp engelerPair (coinA2Fun.val x)
        (engelerWithNumerals.numeral n) = engelerWithNumerals.boolTop \ /
        engelerApp engelerPair (coinA2Fun.val x)
        (engelerWithNumerals.numeral n) = engelerWithNumerals.boolBot})
      (measurableSet_boolValSlice2 n) = top :=
      (MeasureAlgebra.mk_congr coinMeasure (boolValSlice2_eq n).symm).trans
      (boolValSlice2_mk_top n)
    exact (MeasureAlgebra.mk_eq_top coinMeasure).mp hmk
  have : boolValSet2? = ? n, ({x : CoinSpace | engelerApp engelerPair (coinA2Fun.val x)
    (engelerWithNumerals.numeral n) = engelerWithNumerals.boolTop \ /
    engelerApp engelerPair (coinA2Fun.val x)
    (engelerWithNumerals.numeral n) = engelerWithNumerals.boolBot} : Set CoinSpace)? := by
    ext x
    simp [boolValSet2]
  rw [this]
  exact measure_iUnion_null hslice

noncomputable def paperGoodSet : Set CoinSpace :=
  paperReductionNull? I boolValSet1 I boolValSet2

theorem paperGoodSet_conull : coinMeasure paperGoodSet? = 0 := by
  have : paperGoodSet? =
    paperReductionNull U boolValSet1? U boolValSet2? := by
    ext x
    simp [paperGoodSet]
    tauto
  rw [this]
  exact measure_union_null (measure_union_null paperReductionNull_null
    boolValSet1_conull) boolValSet2_conull

theorem exists_mem_paperGoodSet : exists x : CoinSpace, x in paperGoodSet := by
  by_contra h
  push_neg at h
  have heq : paperGoodSet = ({ } : Set CoinSpace) := eq_empty_iff_forall_notMem.mpr h
  have : coinMeasure (Set.univ : Set CoinSpace) = 0 := by
    have h1 : coinMeasure paperGoodSet? = 0 := paperGoodSet_conull
    rw [heq] at h1
    simp using h1
  exact zero_ne_one (this.symm.trans measure_univ)

theorem isOracle_of_mem_boolValSet1 {x : CoinSpace} (hx : x in boolValSet1)
  (T : Set Nat)
  (hT : T = {n | engelerApp engelerPair (coinA1Fun.val x)
    (engelerWithNumerals.numeral n) = engelerWithNumerals.boolTop}) :
  isOracle engelerWithNumerals (coinA1Fun.val x) T := by
  intro n
  have hbool : engelerApp engelerPair (coinA1Fun.val x)
    (engelerWithNumerals.numeral n) = engelerWithNumerals.boolTop \ /
    engelerApp engelerPair (coinA1Fun.val x)
    (engelerWithNumerals.numeral n) = engelerWithNumerals.boolBot :=
    (mem_iInter.mp hx) n
  have happ : engelerWithNumerals.app (coinA1Fun.val x)
    (engelerWithNumerals.numeral n) =
    engelerApp engelerPair (coinA1Fun.val x) (engelerWithNumerals.numeral n) :=
    (engelerApp_funMap (coinA1Fun.val x) (engelerWithNumerals.numeral n)).symm
  rw [happ]
  by_cases htop : engelerApp engelerPair (coinA1Fun.val x)
    (engelerWithNumerals.numeral n) = engelerWithNumerals.boolTop
  * have hnT : n in T := by
    simp [hT, htop]
    rw [htop, chiNum]
    simp [hnT]
  * have hbot : engelerApp engelerPair (coinA1Fun.val x)

```

```

      (engelerWithNumerals.numeral n) = engelerWithNumerals.boolBot :=
      hbool.resolve_left htop
    have hnT : n notin T := by
      simp [hT, htop]
    rw [hbot, chiNum]
    simp [hnT]

theorem isOracle_of_mem_boolValSet2 {x : CoinSpace} (hx : x in boolValSet2)
  (T : Set Nat)
  (hT : T = {n | engelerApp engelerPair (coinA2Fun.val x)
    (engelerWithNumerals.numeral n) = engelerWithNumerals.boolTop}) :
  IsOracle engelerWithNumerals (coinA2Fun.val x) T := by
  intro n
  have hbool : engelerApp engelerPair (coinA2Fun.val x)
    (engelerWithNumerals.numeral n) = engelerWithNumerals.boolTop \ /
    engelerApp engelerPair (coinA2Fun.val x)
    (engelerWithNumerals.numeral n) = engelerWithNumerals.boolBot :=
    (mem_iInter.mp hx) n
  have happ : engelerWithNumerals.app (coinA2Fun.val x)
    (engelerWithNumerals.numeral n) =
    engelerApp engelerPair (coinA2Fun.val x) (engelerWithNumerals.numeral n) :=
    (engelerApp_funMap (coinA2Fun.val x) (engelerWithNumerals.numeral n)).symm
  rw [happ]
  by_cases htop : engelerApp engelerPair (coinA2Fun.val x)
    (engelerWithNumerals.numeral n) = engelerWithNumerals.boolTop
  * have hnT : n in T := by
    simp [hT, htop]
    rw [htop, chiNum]
    simp [hnT]
  * have hbot : engelerApp engelerPair (coinA2Fun.val x)
    (engelerWithNumerals.numeral n) = engelerWithNumerals.boolBot :=
    hbool.resolve_left htop
    have hnT : n notin T := by
      simp [hT, htop]
    rw [hbot, chiNum]
    simp [hnT]

/-- Theorem 43 by the paper chain: Corollary 34 Engeler application
`engelerAppA`, fiberwise Lemma 35(ii) oracles mixed as `L?`, Proposition 42,
and transport through `G_X_measure_inv` (Propositions 39-40, Lemmas 31 and 41). -/
theorem theorem_43_paper :
  exists T_1 T_2 : Set Nat, not proposition_36_i T_1 T_2 /\ not proposition_36_i T_2 T_1
  := by
  obtain <x, hx> := exists_mem_paperGoodSet
  have hxN : x notin paperReductionNull := hx.1.1
  have hx1 : x in boolValSet1 := hx.1.2
  have hx2 : x in boolValSet2 := hx.2
  let T_1 : Set Nat := {n | engelerApp engelerPair (coinA1Fun.val x)
    (engelerWithNumerals.numeral n) = engelerWithNumerals.boolTop}
  let T_2 : Set Nat := {n | engelerApp engelerPair (coinA2Fun.val x)
    (engelerWithNumerals.numeral n) = engelerWithNumerals.boolTop}
  have hor1 : IsOracle engelerWithNumerals (coinA1Fun.val x) T_1 :=
    isOracle_of_mem_boolValSet1 hx1 T_1 rfl
  have hor2 : IsOracle engelerWithNumerals (coinA2Fun.val x) T_2 :=
    isOracle_of_mem_boolValSet2 hx2 T_2 rfl
  refine <T_1, T_2, ?_, ?_>
  * intro h
    obtain <M, hM, hii> := proposition_36_ii_of_i h
    have hforall := hii (coinA1Fun.val x) (coinA2Fun.val x) hor1 hor2
    have hmem : x in mapsAgreeSet M hM := by
      refine mem_iInter.mpr fun n => ?_
      have hn := hforall n
      simp [mapsAgreeSet, engelerApp_funMap]

```



```

    exact hn
  have : x in paperReductionNull :=
    mem_iUnion.mpr <<M, hM>, Or.inl hmem>
  exact hxN this
* intro h
  obtain <M, hM, hii> := proposition_36_ii_of_i h
  have hforall := hii (coinA2Fun.val x) (coinA1Fun.val x) hor2 hor1
  have hmem : x in mapsAgreeSet_swap M hM := by
    refine mem_iInter.mpr fun n => ?_
    have hn := hforall n
    simp [mapsAgreeSet_swap, engelerApp_funMap]
    exact hn
  have : x in paperReductionNull :=
    mem_iUnion.mpr <<M, hM>, Or.inr hmem>
  exact hxN this

theorem theorem_43_via_paper :
  exists T_1 T_2 : Set Nat, not proposition_36_i T_1 T_2 /\ not proposition_36_i T_2 T_1
  :=
  theorem_43_paper

/-- A first-sequence cylinder of all coordinates has measure zero. -/
theorem coinMeasure_determined_fst (b : Cantor) :
  coinMeasure (? n, D1 n (b n)) = 0 := by
  refine coinMeasure_le_half_pow fun N => ?_
  have hsub : (? n, D1 n (b n)) subseq ? n in Finset.range N, D1 n (b n) := by
    intro p hp
    simp only [mem_iInter] at hp |-
    exact fun n _ => hp n
  have hcard : ((2-1 : ? >= 0 inf) ^ (Finset.range N).card) = (2-1) ^ N := by
    simp
  exact (measure_mono hsub).trans
    (hcard |> le_of_eq (coinMeasure_D1_cylinder (Finset.range N) b))

/-- Positive-measure sets in coin space split along a first-sequence bit:
either some `D1 n` cuts a proper positive subclass, or every bit of the
first sequence is a.e. determined and the class is null. -/
theorem exists_coin_split {s : Set CoinSpace} (hs : MeasurableSet s)
  (hpos : coinMeasure s != 0) :
  exists t, MeasurableSet t /\ t subseq s /\ coinMeasure t != 0 /\
  coinMeasure t < coinMeasure s := by
  by_cases hsplit : exists n, 0 < coinMeasure (s I D1 n true) /\
  coinMeasure (s I D1 n true) < coinMeasure s
* obtain <n, hpos', hlt> := hsplit
  exact <s I D1 n true, hs.inter (measurableSet_D1 n true),
    inter_subset_left, ne_of_gt hpos', hlt>
* exfalse
  have hnsplit : forall n,
    coinMeasure (s I D1 n true) = 0 \/\
    coinMeasure (s I D1 n true) = coinMeasure s := by
    intro n
    have hle : coinMeasure (s I D1 n true) <= coinMeasure s :=
      measure_mono inter_subset_left
    by_cases h0 : coinMeasure (s I D1 n true) = 0
    * exact Or.inl h0
    * refine Or.inr (le_antisymm hle (le_of_not_gt fun hlt =>
      hsplit <n, bot_lt_iff_ne_bot.mpr h0, hlt>))
  let b : Cantor := fun n =>
    decide (coinMeasure (s I D1 n true) = coinMeasure s)
  have hnull : forall n, coinMeasure (s \ D1 n (b n)) = 0 := by
    intro n
    by_cases heq : coinMeasure (s I D1 n true) = coinMeasure s
    * have hb : b n = true := decide_eq_true heq

```

```

rw [hb]
have hset : s \ D1 n true = s \ (s I D1 n true) := by
  ext p; simp [mem_sdiff]
rw [hset, measure_sdiff (? := coinMeasure) inter_subset_left
  (hs.inter (measurableSet_D1 n true)).nullMeasurableSet
  (measure_ne_top coinMeasure _), heq, tsub_self]
* have hb : b n = false := decide_eq_false heq
have heq0 : coinMeasure (s I D1 n true) = 0 :=
  (hnsplit n).resolve_right heq
have hset : s \ D1 n false = s I D1 n true := by
  rw [D1_false_eq_compl]
  ext p

```

Lean 4 source (lines 2001–2033)

```

      simp [mem_inter_iff]
    rw [hb, hset, heq0]
  have hmeasI : MeasurableSet (? n, D1 n (b n)) :=
    MeasurableSet.iInter fun n => measurableSet_D1 n (b n)
  have hdiff : coinMeasure (s \ ? n, D1 n (b n)) = 0 := by
    have : s \ ? n, D1 n (b n) = ? n, s \ D1 n (b n) := by
      ext p; simp
    rw [this]
    exact measure_iUnion_null hnull
  have hadd := measure_inter_add_sdiff (? := coinMeasure) s hmeasI
  have hinter : coinMeasure (s I ? n, D1 n (b n)) = 0 :=
    measure_mono_null inter_subset_right (coinMeasure_determined_fst b)
  rw [hinter, hdiff, add_zero] at hadd
  exact hpos hadd.symm

/-- Fair-coin `A(X)` is atomless: any positive class splits along a
fresh first-sequence coordinate (or else determines the first sequence
and is null). -/
theorem not_isAtomic_coinAlgebra : not IsAtomic coinAlgebra :=
  not_isAtomic_measureAlgebra_of_splits
  (by
    have : coinMeasure Set.univ = 1 := measure_univ
    exact this.symm |> one_ne_zero)
  fun {s} hs hpos => exists_coin_split hs hpos

/-- Proposition 44 at the fair-coin instance of `A(X) = Sigma/N(?)`. -/
theorem proposition_44_coin {Y : Type*} [Nonempty Y] [Countable Y] :
  not IsContinuousDcpo (LOMeasure coinMeasure Y) :=
  proposition_44_measure (? := coinMeasure) not_isAtomic_coinAlgebra

end

end Scott2026

```

A.39 Scott2026/Basic.lean

826 lines.

Lean 4 source (lines 1–400)

```

/-
Copyright (c) 2026 Lars Warren Ericson. All rights reserved.
Released under Apache 2.0 license as described in the file LICENSE.
Authors: Lars Warren Ericson.
-/

import Scott2026.BooleanLogic
import Scott2026.Setoid
import Scott2026.RelFun

```

```

import Scott2026.Categories
import Scott2026.PowerSet
import Scott2026.Oid
import Scott2026.SetCategory
import Scott2026.OidEssential
import Scott2026.RawPowerStrict
import Scott2026.Domain
import Scott2026.Lambda
import Scott2026.Interp
import Scott2026.Lemma35General
import Scott2026.InterpConst
import Scott2026.InterpVA
import Scott2026.InterpConstVA
import Scott2026.Lemma31
import Scott2026.Corollary34
import Scott2026.Prop36
import Scott2026.LambdaVA
import Scott2026.LambdaConstVA
import Scott2026.Engeler
import Scott2026.EngelerVA
import Scott2026.Random
import Scott2026.Coin
import Scott2026.VA
import Scott2026.ExtensionalVA
import Scott2026.InternalDomain
import Scott2026.Proposition28
import Scott2026.ReflexiveVA
import Scott2026.Theorem26

universe u v

/-!
# Scott 2026 -- Interpreting Lambda Calculus in Domain-Valued Random Variables

Primary source: Furber, Mardare, Panangaden, and Scott, LIPIcs CSL 2026, Article 48.
Working transcription: `sources/Scott2026_vision.md`.

This module re-exports the sorry-free development.
-/

namespace Scott2026

/-- Proposition 27: finite subsets of `T` are directed under inclusion.
Mathlib-only Palomar wrapper (`Type u`, `Set.Subset`). -/
theorem proposition_27_finite_directed {X : Type u} (T : Set X) :
  DirectedOn Set.Subset {S : Set X | S.Finite} /\ Set.Subset S T :=
  finite_subsets_directed T

/-- Proposition 27: `T` is the union of its finite subsets.
Mathlib-only Palomar wrapper (`Type u`, `Set.Subset`). -/
theorem proposition_27_finite_sUnion {X : Type u} (T : Set X) :
  ?_0 {S : Set X | S.Finite} /\ Set.Subset S T = T :=
  sUnion_finite_subsets T

/-- Proposition 27: if `X` is countable, so is the family of finite subsets.
Mathlib-only Palomar wrapper (`Type u`). -/
theorem proposition_27_finite_countable {X : Type u} [Countable X] :
  Set.Countable {S : Set X | S.Finite} :=
  finite_subsets_countable (X := X)

/-- Lemma 12: `A`-monotone maps are functional. -/
theorem lemma_12 {A : Type*} [CompleteBooleanAlgebra A] {X Y : Type*}
  (P : APoset (A := A) X) (Q : APoset (A := A) Y) {f : X -> Y}

```

```

(hf : APoset.AMonotone P Q f) :
  APoset.Functional P.toASetoid Q.toASetoid f :=
  APoset.AMonotone.functional (P := P) (Q := Q) hf

/-- Definition 4: the two completeness conditions on an `A`-setoid agree. The converse
direction refines a compatible family by a maximal pairwise disjoint family with the
same join. -/
theorem definition_4 {A : Type*} [CompleteBooleanAlgebra A] {X : Type*}
  (S : ASetoid (A := A) X) :
  ASetoid.IsComplete.{v} S <-> ASetoid.IsCompleteDisjoint.{v} S :=
  ASetoid.isComplete_iff_isCompleteDisjoint S

/-- Theorem 17, mixing witness on `A`-subsets. -/
theorem theorem_17_mix {A : Type*} [CompleteBooleanAlgebra A] {X ? : Type*}
  (a : ? -> A) (u : ? -> ASubset A X) (x : X) :
  mixSubset a u x = bigcup i, a i sqcap u i x :=
  rfl

/-- Proposition 27, including its continuous-lattice, way-below, finite-base,
and countable-base clauses. -/
theorem proposition_27 (X : Type*) : Proposition27Statement X :=
  proposition27_full X

/-- Proposition 27's pointwise characterization of `<<`. -/
theorem proposition_27_wayBelow {X : Type*} {S T : Set X} :
  WayBelow (D := Set X) S T <-> S.Finite /\ S subseq T :=
  prop27_wayBelow_iff

/-- Proposition 27: `?(X)` is a continuous lattice. -/
theorem proposition_27_continuous (X : Type*) : IsContinuousLattice (Set X) :=
  isContinuousLattice_set X

/-- Theorem 17: `^A(X)` is a complete `A`-setoid. -/
theorem theorem_17_complete {A : Type*} [CompleteBooleanAlgebra A] {X : Type*} :
  (powerSetoid (A := A) (X := X)).IsComplete :=
  powerSetoid_isComplete

/-- Proposition 28, totality and strictness of `^A(X)` on a ground type. -/
theorem proposition_28_total {A : Type*} [CompleteBooleanAlgebra A] {X : Type*} :
  (powerSetoid (A := A) (X := X)).IsTotal :=
  powerSetoid_isTotal

theorem proposition_28_strict {A : Type*} [CompleteBooleanAlgebra A] {X : Type*} :
  (powerSetoid (A := A) (X := X)).IsStrict :=
  powerSetoid_isStrict

/-- Proposition 29, retract identity for maps determined by finite sets. -/
theorem proposition_29 {E : Type*} [DecidableEq E] (pair : Finset E x E -> E)
  (hpair : Function.Injective pair) {f : Set E -> Set E}
  (hf : DeterminedByFinite f) (X : Set E) :
  engelerApp pair (engelerLam pair f) X = f X :=
  prop29_retract pair hpair hf X

/-- Lemma 41: constant random variables map to check-sets. -/
theorem lemma_41_const {X Y : Type*} [MeasurableSpace X] (S : Set Y) :
  G_pre (constRV (X := X) S) = checkSet (A := Set X) S :=
  lemma_41 S

/-- Jech 14.15: `?x = x? = 1` in `V^A`. -/
theorem jech_lemma_14_15 {A : Type*} [CompleteBooleanAlgebra A] (x : AName A) :
  AName.eqB x x = top :=
  AName.eqB_self x

```

```

/-- Jech 14.16: transitivity of equality and substitution into membership. -/
theorem jech_lemma_14_16 {A : Type u} [CompleteBooleanAlgebra A]
  (x y z : AName A) :
  (AName.eqB x y sqcap AName.eqB y z <= AName.eqB x z) /\
  (AName.memB x y sqcap AName.eqB x z <= AName.memB z y) /\
  (AName.memB y x sqcap AName.eqB x z <= AName.memB y z) :=
  AName.model_laws x y z

/-- Jech 14.18: mix of an antichain of names. -/
theorem jech_lemma_14_18 {A ? : Type u} [CompleteBooleanAlgebra A]
  (u : ? -> A) (xs : ? -> AName A)
  (hdis : Pairwise fun i j => u i sqcap u j = False) (i : ?) :
  u i <= AName.eqB (AName.mix u xs) (xs i) :=
  AName.mix_le_eqB u xs hdis i

/-- Definition 14: `Oid(X)` is the `A`-setoid on `dom(X)` whose equality is equation (3),
`?x = y?`X = ?x in X? sqcap ?y in X? sqcap ?x = y?. Symmetry and transitivity are the
`ASetoid` fields of `oid`. -/
theorem definition_14 {A : Type u} [CompleteBooleanAlgebra A]
  (X : AName.{u} A) (i j : X.idx) :
  (oid X).eq i j =
  AName.memB (X.child i) X sqcap AName.memB (X.child j) X sqcap
  AName.eqB (X.child i) (X.child j) :=
  oid_eq X i j

/-- Definition 15: for `?S subseq X? = 1`, `e(S)(x) = ?x in S?` is a predicate on `Oid(X)`
`;
`ePred` carries the two predicate conditions of Definition 7. -/
theorem definition_15 {A : Type u} [CompleteBooleanAlgebra A]
  (X S : AName.{u} A) (h : AName.subsetB S X = top) (i : X.idx) :
  (ePred X S h).val i = AName.memB (X.child i) S :=
  ePred_val X S h i

/-- Definition 16 on objects and morphisms: `Oid(F)(x, y) = ?(x,y)^A in F?` is a
relational function `Oid(X) -> Oid(Y)` for every function name `F : X -> _A Y`. -/
theorem definition_16 {A : Type u} [CompleteBooleanAlgebra A]
  (X Y F : AName.{u} A) (h : isFunctionB F X Y = top) (i : X.idx) (j : Y.idx) :
  (oidRel X Y F h).val i j = AName.memB (opairB (X.child i) (Y.child j)) F :=
  oidRel_val X Y F h i j

/-- Definition 16, functoriality on identities. -/
theorem definition_16_id {A : Type u} [CompleteBooleanAlgebra A]
  (X : AName.{u} A) (i j : X.idx) :
  (oidRel X X (idB X) (isFunctionB_id X)).val i j = (RelFun.id (oid X)).val i j :=
  oidRel_id X i j

/-- Definition 16, functoriality on composites. -/
theorem definition_16_comp {A : Type u} [CompleteBooleanAlgebra A]
  {X Y Z f g : AName.{u} A} (hf : isFunctionB f X Y = top) (hg : isFunctionB g Y Z = top)
  (i : X.idx) (k : Z.idx) :
  (oidRel X Z (compB g f X Z) (isFunctionB_comp hf hg)).val i k =
  ((oidRel Y Z g hg).comp (oidRel X Y f hf)).val i k :=
  oidRel_comp hf hg i k

/-- Theorem 17 at the `V^A` level: `Oid(P^A(X))` is complete. This is not the
ground-type `theorem_17_complete`. -/
theorem theorem_17_va_complete {A : Type u} [CompleteBooleanAlgebra A]
  (X : AName.{u} A) : (oid (powerB X)).IsComplete :=
  oid_powerB_isComplete X

/-- Theorem 17, totality of `Oid(P^A(X))`. -/
theorem theorem_17_va_total {A : Type u} [CompleteBooleanAlgebra A]
  (X : AName.{u} A) : (oid (powerB X)).IsTotal :=

```

```

oid_powerB_isTotal X

/-- Theorem 17, moreover: a congruent predicate on subsets of `X` is realized
by an element of `Oid(P^A(X))`. -/
theorem theorem_17_va_full {A : Type u} [CompleteBooleanAlgebra A]
  (X : AName.{u} A) (? : AName.{u} A → A)
  (hcongr : forall S T, AName.eqB S T sqcap ? S <= ? T) (a : A)
  (ha : a = bigcup S, AName.memB S (powerB X) sqcap ? S) :
  exists p : (powerB X).idx, ? ((powerB X).child p) = a :=
oid_powerB_full X ? hcongr a ha

/-- Proposition 28: `Oid(P^A(X))` is complete. Thin export of Theorem 17. This is
not ground-type `theorem_17_complete`. -/
theorem proposition_28_va_complete {A : Type u} [CompleteBooleanAlgebra A]
  (X : AName.{u} A) : (oid (powerB X)).IsComplete :=
theorem_17_va_complete X

/-- Proposition 28: `Oid(P^A(X))` is total. Thin export of Theorem 17. This is
not ground-type `proposition_28_total`. -/
theorem proposition_28_va_total {A : Type u} [CompleteBooleanAlgebra A]
  (X : AName.{u} A) : (oid (powerB X)).IsTotal :=
theorem_17_va_total X

/-- Proposition 28, canonical equality at `X = check Y`: Boolean equality of
children implies equality of the canonical names. This is not index-level
`IsStrict` and is not ground-type `proposition_28_strict`. -/
theorem proposition_28_va_canonical_eq {A : Type u} [CompleteBooleanAlgebra A]
  [Nontrivial A] (Y : ZFSet.{u})
  {p q : (powerB (checkZF (A := A) Y)).idx}
  (h : (oid (powerB (checkZF (A := A) Y))).eq p q = top) :
  restrictName ((powerB (checkZF (A := A) Y)).child p)
    (checkZF (A := A) Y) =
  restrictName ((powerB (checkZF (A := A) Y)).child q)
    (checkZF (A := A) Y) := by
have hpq := oid_powerB_checkExt_isStrict (A := A) Y.out p q h
subst q
rfl

/-- Definition 11 on `P^A(X)`: symmetrized Boolean inclusion is `Oid(P^A(X))`
equality. -/
theorem definition_11_powerB {A : Type u} [CompleteBooleanAlgebra A]
  (X : AName.{u} A) (p q : (powerB X).idx) :
  (powerBPoset X).eq p q = (oid (powerB X)).eq p q :=
powerBPoset_eq X p q

/-- Proposition 28, totality of the canonical (fixed-point) carrier of `P^A(X)`.
This is not raw `proposition_28_va_total`. -/
theorem proposition_28_va_canonical_total {A : Type u} [CompleteBooleanAlgebra A]
  (X : AName.{u} A) : (canonicalPowerSetoid X).IsTotal :=
canonicalPowerSetoid_isTotal X

/-- Proposition 28, strictness of the canonical (fixed-point) carrier of
`P^A(X)`. Boolean equality at `top` equates membership values; fixed-point
hypotheses equate indices. This is not raw index-level `IsStrict` and is not
ground-type `proposition_28_strict`. -/
theorem proposition_28_va_canonical_strict {A : Type u} [CompleteBooleanAlgebra A]
  (X : AName.{u} A) : (canonicalPowerSetoid X).IsStrict :=
canonicalPowerSetoid_isStrict X

/-- Proposition 28, completeness of the canonical carrier: mix on the raw
carrier, then normalize. This is not raw `proposition_28_va_complete`. -/
theorem proposition_28_va_canonical_complete {A : Type u}
  [CompleteBooleanAlgebra A] (X : AName.{u} A) :

```

```

    (canonicalPowerSetoid X).IsComplete :=
canonicalPowerSetoid_isComplete X

/-- Definition 11 on the canonical carrier: symmetrized inclusion is canonical
`Oid` equality. -/
theorem definition_11_canonicalPowerB {A : Type u} [CompleteBooleanAlgebra A]
  (X : AName.{u} A) (p q : CanonicalPowerIdx X) :
  (canonicalPowerPoset X).eq p q = (canonicalPowerSetoid X).eq p q :=
canonicalPowerPoset_eq X p q

/-- Corollary 18: `Oid(P^A(X x _A Y))` is complete. -/
theorem corollary_18_prod {A : Type u} [CompleteBooleanAlgebra A]
  (X Y : AName.{u} A) : (oid (powerB (prodB X Y))).IsComplete :=
oid_prodB_isComplete X Y

/-- Corollary 18: `Oid({X -> _A Y})` is complete. -/
theorem corollary_18_funs {A : Type u} [CompleteBooleanAlgebra A]
  (X Y : AName.{u} A) : (oid (funsB X Y)).IsComplete :=
oid_funsB_isComplete X Y

/-- Corollary 18, fullness for relations. -/
theorem corollary_18_prod_full {A : Type u} [CompleteBooleanAlgebra A]
  (X Y : AName.{u} A) (? : AName.{u} A -> A)
  (hcongr : forall S T, AName.eqB S T sqcap ? S <= ? T) (a : A)
  (ha : a = bigcup S, AName.memB S (powerB (prodB X Y)) sqcap ? S) :
  exists p : (powerB (prodB X Y)).idx, ? ((powerB (prodB X Y)).child p) = a :=
oid_prodB_full X Y ? hcongr a ha

/-- Corollary 18, fullness for functions. -/
theorem corollary_18_funs_full {A : Type u} [CompleteBooleanAlgebra A]
  (X Y : AName.{u} A) (? : AName.{u} A -> A)
  (hcongr : forall F G, AName.eqB F G sqcap ? F <= ? G) (a : A)
  (ha : a = bigcup F, AName.memB F (funsB X Y) sqcap ? F) :
  exists p : (funsB X Y).idx,
    AName.memB ((funsB X Y).child p) (funsB X Y) sqcap
      ? ((funsB X Y).child p) = a :=
oid_funsB_full X Y ? hcongr a ha

/-- Definition 13: on a complete codomain, `F(f)` is functional and `?(F(f)) = f`.
This is not the hom-object isomorphism `SetoidR_A(X,Y) ~= SetoidF_A(X,Y)`. -/
theorem definition_13 {A : Type*} [CompleteBooleanAlgebra A] {X Y : Type*}
  {S : ASetoid (A := A) X} {T : ASetoid (A := A) Y}
  (hT : T.IsComplete) (f : RelFun S T) :
  APoset.Functional S T (functionalOfRel hT f) /\
  (forall x y, gamma S T (functionalOfRel hT f) x y = f.val x y) :=
<functionalOfRel_functional hT f, functionalOfRel_gamma hT f>

/-- Theorem 30, retract at Boolean value `top` :
`?lam(f) * X = f(X)? = 1` for determined-by-finite `f`. This is a name
calculation, not Theorem 1(i). -/
theorem theorem_30_retract {A : Type u} [CompleteBooleanAlgebra A]
  (f : CanonicalPowerIdx (AName.check (A := A) PSet.omega) ->
    CanonicalPowerIdx (AName.check (A := A) PSet.omega))
  (hf : DeterminedByFiniteVA (A := A) f)
  (X : CanonicalPowerIdx (AName.check (A := A) PSet.omega)) :
  AName.eqB
    ((powerB (AName.check (A := A) PSet.omega)).child
      (engelerAppVA (A := A) (engelerLamVA (A := A) f) X).1)
    ((powerB (AName.check (A := A) PSet.omega)).child (f X).1) = top :=
engelerVA_retract (A := A) f hf X

/-- Theorem 30, retract as canonical `Oid` equality at `top`. -/
theorem theorem_30_retract_oid {A : Type u} [CompleteBooleanAlgebra A]

```

```

(f : CanonicalPowerIdx (AName.check (A := A) PSet.omega) ->
  CanonicalPowerIdx (AName.check (A := A) PSet.omega))
(hf : DeterminedByFiniteVA (A := A) f)
(X : CanonicalPowerIdx (AName.check (A := A) PSet.omega)) :
(canonicalPowerSetoid (AName.check (A := A) PSet.omega)).eq
  (engelerAppVA (A := A) (engelerLamVA (A := A) f) X) (f X) = top :=
engelerVA_retract_oid (A := A) f hf X

/-- Theorem 30 data: `(P^A(check E), ? subseq ?, *, lam)` on the canonical carrier. -/
noncomputable def theorem_30_model {A : Type u} [CompleteBooleanAlgebra A] :
  AValuedReflexiveDcpo A
  (CanonicalPowerIdx (AName.check (A := A) PSet.omega)) :=
engelerVA_model (A := A)

theorem theorem_30_complete {A : Type u} [CompleteBooleanAlgebra A] :
  (canonicalPowerSetoid (AName.check (A := A) PSet.omega)).IsComplete :=
engelerVA_complete (A := A)

theorem theorem_30_total {A : Type u} [CompleteBooleanAlgebra A] :
  (canonicalPowerSetoid (AName.check (A := A) PSet.omega)).IsTotal :=
engelerVA_total (A := A)

/-- Canonical-carrier strictness only; the raw index carrier is not strict. -/
theorem theorem_30_strict {A : Type u} [CompleteBooleanAlgebra A] :
  (canonicalPowerSetoid (AName.check (A := A) PSet.omega)).IsStrict :=
engelerVA_strict (A := A)

/-- Theorem 30: `(P^A(check E), ? subseq ?, *, lam)` is an `A`-valued reflexive
dcpo (operations and retract at `top`). Not an internal continuous lattice
and not a countable-base claim. -/
theorem theorem_30 {A : Type u} [CompleteBooleanAlgebra A] :
  (theorem_30_model (A := A)).poset =
    canonicalPowerPoset (AName.check (A := A) PSet.omega) /\
  (forall F X, (theorem_30_model (A := A)).app F X =
    engelerAppVA (A := A) F X) /\
  (forall f, (theorem_30_model (A := A)).lam f = engelerLamVA (A := A) f) /\
  (forall f X, DeterminedByFiniteVA (A := A) f ->
    (canonicalPowerSetoid (AName.check (A := A) PSet.omega)).eq
      (engelerAppVA (A := A) (engelerLamVA (A := A) f) X) (f X) = top) /\
  (canonicalPowerSetoid (AName.check (A := A) PSet.omega)).IsComplete /\
  (canonicalPowerSetoid (AName.check (A := A) PSet.omega)).IsTotal /\
  (canonicalPowerSetoid (AName.check (A := A) PSet.omega)).IsStrict :=
engelerVA (A := A)

-- Jech 14.19, CSL Theorem 1(iii), and Jech 14.21 are `jech_lemma_14_19`,
-- `theorem_1_iii`, and `jech_lemma_14_21` from `Scott2026.VA`.
-- CSL Theorem 1(ii) is `theorem_1_ii` (FOL MP, `forall`-intro/elim, equality
-- congruence on `SetFormula` / `?_Set(V^A)`). CSL Theorem 1(i) is
-- `theorem_1_i`: a ZFC theorem has Boolean value `1` at every assignment.
-- Choice is `axiom_choice_valid` (Jech 14.27) via `wellOrderB` and the
-- remaining well-order conjuncts (antisymmetry, totality, transitivity,
-- least element) over pair-index `iSup`.
--
-- After Theorem 2 (CSL p.3-4): `memB_powerB`, pairing identities
-- `eqB_singletonB` / `eqB_pairB` / `eqB_opairB`, check commutation
-- `check_singleton` / `check_pair` / `check_opair`, inductiveness and
-- leastness of `check ?` (`check_omega_inductive`, `check_omega_least`),
-- CSL Proposition 3 (`proposition_3`), and the internal function object
-- (`isFunctionB`, `funsB`, `homB`, `idB`, `compB`, `isFunctionB_id`,
-- `isFunctionB_comp`, `compB_congr`) are from `Scott2026.VA`.
-- This is not Theorem 1(i) or 1(ii).
--
-- S3 through Corollary 18 (CSL p.4-7): `oid` / `oid_eq` / `oid_eps` (Definition 14),

```



```
-- `ePred` / `ePredPowerB` (Definition 15), `oidRel` / `oidRel_id` / `oidRel_comp`
-- (Definition 16) from `Scott2026.Oid`, with `RelFun.comp` (Definition 8 composition)
-- and `functionalOfRel` (Definition 13) from `Scott2026.RelFun`. `SetCategory`
-- lifts the quotient morphisms and proves fullness and faithfulness;
-- `OidEssential` reconstructs essential surjectivity and packages
-- `setAEquivSetoidR` : Set_A ? SetoidR_A. Theorem 17 / Corollary 18 at
-- the `Oid(P^A(X))` level are `theorem_17_va_*` / `corollary_18_*`
-- (`theorem_17_complete` / `proposition_28_total` / `proposition_28_strict`
-- remain ground-type). The complete internal statement is
-- `proposition_28` : Proposition28Statement X; its component results include
-- `proposition_28_va_complete`
-- / `proposition_28_va_total` (thin-export Theorem 17 on the raw carrier),
-- `proposition_28_va_canonical_eq` (canonical names on `check Y`, not raw
-- `IsStrict`), `definition_11_powerB` / `powerBPoset`, and the fixed-point
```

Lean 4 source (lines 401–800)

```
-- carrier `CanonicalPowerIdx` with `proposition_28_va_canonical_strict` /
-- `proposition_28_va_canonical_total` / `proposition_28_va_canonical_complete`
-- / `definition_11_canonicalPowerB`. Raw index-level `IsStrict` is false
-- (`oid_powerB_not_strict`); there is no `proposition_28_va_strict`.
-- The continuous-lattice clause is `isContinuousLatticeSubsetB_powerB`
-- (`isContinuousLatticeSubsetB (powerB X) = top`), via tight union
-- `sUnionB` (fat `unionB` stays one-sided) and internal `<<` <-> `finite
-- `subseq` (`wayBelowSubsetB_eq_finite_subset`, not `proposition_27`).
-- The base clause is `isBaseSubsetB_pfinB_powerB`
-- (`isBaseSubsetB (pfinB X) (powerB X) = top`), via agreement of
-- `{e in P^A(X) | e << d}` with `P_fin^A(d)` at `d subseq X`
-- (`inWayBelowDownB_eq_memB_pfinB`) and directedness / joins of
-- `d I P_fin^A(X)` (`directedDownB_pfinB_inter`,
-- `joinsDownB_pfinB_inter`). Extensional check-base transfer and strictness
-- are `isBaseSubsetB_checkExt_pfin_powerB` and
-- `oid_powerB_checkExt_isStrict`, using `proposition_3_ext`.
-- The internal language is `isContinuousLatticeSubsetF` /
-- `isBaseSubsetF`, with exact Boolean-value agreement lemmas.
--
-- Theorem 30 (CSL p.7): `(P^A(check E), ? subseq ?, *, lam)` is an `A`-valued
-- reflexive dcpo on the canonical carrier (`theorem_30` / `theorem_30_model`
-- / `theorem_30_retract` / `theorem_30_retract_oid`). The pairing on
-- `P_fin(Nat) x Nat` is `engelerPair` (not the empty initial algebra of
-- `P_fin x Id`). Internal `*` / `lam` are `engelerAppVA` / `engelerLamVA`.
-- The retract is a name calculation at `top` for `DeterminedByFiniteVA`;
-- this is not Theorem 1(i), Definition 19 at `V^A`, an internal
-- continuous lattice, or a countable-base claim. Canonical strictness
-- is `theorem_30_strict`; the raw index carrier is not claimed strict.
--
-- Example 21 at `V^A` and Proposition 22 (CSL p.8-9): pure fun -terms are
-- encoded by tags `(0,x)`, `(1,(x,M))`, `(2,(M,N))` (`pLamVar` /
-- `pLamAbs` / `pLamApp`). Full Definition 20 syntax, including tag
-- `(3,d)`, is `LamDK` / `lamDKB`; recursively propagated coefficients
-- support arbitrary Boolean-valued `K subseq D`. `lamInductiveB` is the
-- Boolean `?(V)`-inductive clause; `lamB (check Var)` is
-- `?(check Var)^A`. Inductiveness and leastness are `example_21_va` /
-- `proposition_22` / `proposition_22_least` (the `check_omega_least`
-- pattern, with Theorem 1(iii) for witnesses). Check-equality
-- `?check (?(Var)) = lamB (check Var)? = 1` is
-- `proposition_22_check_eq`. This is not `?(D, check Var, ?)^A` or
-- an interpretation.
--
-- Example 24 (CSL p.9): `fun` is encoded as pairs of tagged terms
-- (`encodeEq` / `encodeEqB` via `pOpair` / `opairB`). `lamEqInductiveB`
-- is the Boolean `fun`-inductive clause (not required to be `Delta_0`); `b`
-- uses paper substitution `Lam.substCA`, and `a` is included. `lamEqB`
-- `(checkVar Var)` is `fun ^A`, where `checkVar Var` is the unfolding of
```

```

-- `check Var` (`check_eq_mk`, so `idx` is `Var.Type`). Inductiveness and
-- `?check(fun ) subseteq lamEqB (checkVar Var)? = 1` are `example_24` /
-- `example_24_va` / `example_24_subset` (induction on `LamEq`). The
-- paper only claims `subseteq`; equality is not exported. This is not
-- `?(D, check Var, ?)^A` or Theorem 26.
--
-- Definition 25 (CSL p.10): ground `?*?` on `ReflexiveDcpo` is `interp`
-- (`interp_var` / `interp_app` / `interp_abs` / `interpClosed`). Valuations
-- are Finset-supported (`Valuation` / `Valuation.update` / `Valuation.empty`).
-- The meta-lambda is Scott-continuous (`interp_update_scott`), so `lam` is
-- applied to a map in the retract class. There is no constant clause.
-- [4, Theorem 5.4.4] is `interp_sound` / `definition_25_sound` on the
-- capture-free fragment `LamEqNC` (`interp_subst` needs `Lam.FreeFor`;
-- `Lam.subst` is naive and does not rename). Full paper soundness is
-- `interp_sound_full` / `definition_25_sound_full` (`LamEq`, CA-b + a,
-- `[Infinite Var]`). Naive capture is `interp_substNaive_captures`.
-- This is not `SetoidF_A(?^A, D)`, not A-valued `?*?^A_?`, and not
-- Theorem 26.
--
-- Theorem 26, pure-term fragment (CSL p.10): `interpVA` interprets
-- `?(Var)` on the Theorem 30 carrier (`CanonicalPowerIdx` of `check ?`)
-- by the Definition 25 clauses with `engelerAppVA` / `engelerLamVA`.
-- The meta-lambda is `DeterminedByFiniteVA` (`theorem_26_update_determined`),
-- so `theorem_30_retract` applies. Capture-free soundness remains
-- `interpVA_sound` / `theorem_26_sound` (`LamEqNC`). Full paper
-- soundness on this carrier is `interpVA_sound_full` /
-- `theorem_26_sound_full` (`LamEq`, CA-b + a, `[Infinite Var]`).
-- This Engeler packaging is not the internal `SetoidF_A` form: that is
-- `theorem26Full` / `theorem26Pure` in `Theorem26.lean`, with Definition
-- 25 clauses `interpDKGraph_*` and checked `LamEq` soundness
-- `theorem26Pure_sound` in `InternalEvalPack.lean`.
--
-- Lemma 31 (CSL p.11): `lemma_31` / `lemma_31_closed` are Boolean
-- equality at `top` between `interpVA` of a checked valuation and the
-- check (`setToCanonical`) of ground `interp` on
-- `engelerReflexiveDcpo engelerPair`. Pairings match.
--
-- Definition 32 (CSL p.11): `definition_32` is the syntactic package
-- (closed Church `False`, `top`, `(c_n)`, and the `if`/`succ`/`pred`/`0?`
-- identities). Distinctness (i) is `churchTrue_interp_ne_churchFalse`.
-- `ReflexiveDcpoWithNumerals` stays algebraic.
--
-- Proposition 33 (CSL p.11): `proposition_33` packages the Engeler
-- model as a reflexive continuous lattice with Church numerals
-- (`engelerWithNumerals`, `IsContinuousLattice (Set Nat)`).
--
-- Corollary 34 (CSL p.11): `corollary_34` is the paper name -- the
-- internal V^A statement ?reflexive continuous lattice with numerals?.
-- The internal `<<` / continuous-lattice language (subset order) is in
-- `InternalDomain.lean` (`wayBelowSubsetF`, `isContinuousLatticeSubsetF`,
-- matching `*B` Boolean values). `corollary_34_check` remains the
-- check/VA numeral fragment; the continuous-lattice half is
-- `isContinuousLatticeSubsetB_powerB`; the base is
-- `isBaseSubsetB_pfinB_powerB` (not `proposition_28`); check-base
-- transfer is `isBaseSubsetB_check_pfin_powerB`. The reflexive
-- dcpo is `theorem_30_va`. Internal Proposition 27 is
-- `wayBelowSubsetB_eq_finite_subset` (`<<` <-> `finite` `subseteq`, via
-- `isFiniteB_of_subset`); not named `proposition_27`.
-- `eqB_interpClosedVA_churchNum_subsingleton` records that numeral
-- injectivity needs `[Nontrivial A]`.
--
-- Lemma 35 (CSL p.12): `lemma_35_of` / `lemma_35_i_of` / `lemma_35_ii_of`
-- are the paper-type theorems on an arbitrary reflexive dcpo whose

```

```

-- distinguished elements are Church interpretations
-- (`churchWithNumerals`; numeral injectivity from `m?`). Part (ii)
-- uses Scott 1972 `scottExtend` on a continuous lattice. Engeler
-- `lemma_35` / `lemma_35_i` / `lemma_35_ii` keep their original
-- proofs (`gbar` fingerprint) and are also recovered as
-- `lemma_35_via_general` / `_i_via_general` / `_ii_via_general`.
-- `lemma_35_ii_of_extension` stays the weaker ?given a Scott-continuous
-- extension? lemma. `lemma_35_i_general` still takes
-- `NumeralSeparators`; the paper-named theorems do not.
--
-- Proposition 36 (CSL p.12): `proposition_36_of` is the paper type on
-- an arbitrary reflexive continuous lattice with Church numerals
-- (`churchWithNumerals`; (ii) -> (i) uses `lemma_35_ii_of`). Engeler
-- `proposition_36` remains the special case, also recovered as
-- `proposition_36_via_general`. `ManyOneLe` stays algebraic
-- (any `f : Nat -> Nat`). `exists_nat_fun_not_lambda_definable` is why
-- `ManyOneLe -> proposition_36_i` is not claimed.
--
-- S5 Random Variables (CSL p.13-15): `definition_37`, `lemma_38`,
-- `G_X`, `proposition_39`, `proposition_40`, `lemma_41` /
-- `lemma_41_const` are paper-named. `MeasureAlgebra` is the paper
-- `A(X)=Sigma/N(?)` (quotient of measurable sets). `coinAlgebra` is the
-- fair-coin instance. `coinS1` / `coinS2` are equation (5):
-- `S_i(check n) = [D_{i,n,1}]` in `P^{A(X)}(check ?)`.
-- `G_X_measure` / `proposition_39_measure` / `proposition_40_measure`
-- / `lemma_41_measure` are the paper maps on `MeasureAlgebra`
-- (`LOMeasure`); the un-suffixed names remain the all-sets
-- `AssociatedAlgebra` forms. `coinLO` / `G_X_coin` instantiate
-- those maps at `coinMeasure`. `proposition_42_algebra` is the
-- Boolean-value-0 statement in `coinAlgebra` (finite-`K` via
-- `Finset` join; fuzzy `pfinB` quantification remains).
-- `proposition_42` remains the raw measure core (`coinMeasure`).
-- `proposition_42_mk_bot` lifts the null sets `agreeSet` /
-- `agreeSet_swap` to `False`. All-sets `AssociatedAlgebra` /
-- `ofMeasure hN` remain the stronger presentation that coin space
-- does not inhabit (`toMeasurable` needs every set
-- null-measurable). `lemma_41` remains the pre-quotient core;
-- `lemma_41_algebra` is the quotient form `G_X([K_S]) = checkSet S`
-- on `AssociatedAlgebra`. There is no `coinNegligibility` instance.
-- Weaker lemmas `proposition_42_finite` / `_finite_image` /
-- `_finite_swap` / `_infinite_image` keep weaker names. The
-- paper-proof of Theorem 43 is `theorem_43_paper` (Corollary 34
-- Engeler / `engelerAppA` + fiberwise Lemma 35(ii) mix + Prop 42 +
-- `G_X_measure`). `theorem_43` remains the external-oracle form
-- (same paper type) via `chiOracle` / `lemma_35_ii` /
-- `proposition_36`. `proposition_44` transports
-- `CompleteLattice` along `G_X` and records `not IsContinuousLattice`
-- when `not IsAtomic`. On a complete lattice the paper?s ?continuous
-- dcpo? is `IsContinuousDcpo` (definitional alias of
-- `IsContinuousLattice`); `proposition_44_dcpo` is that wording.
-- `proposition_44_measure` is the paper `A(X)=Sigma/N(?)` form on
-- `LOMeasure`; `proposition_44_coin` is the fair-coin instance
-- (`not IsAtomic coinAlgebra` by splitting a positive class along a
-- first-sequence `D1` coordinate).

/-- Example 21, ground: `?(Var)` is the least inductive set of pure terms. -/
theorem example_21 {Var : Type*} {S : Set (Lam Var)} (h : Lam.IsInductive S) :
  forall M : Lam Var, M in S :=
  Lam.lam_least_inductive h

/-- Example 21 at `V^A`: `?lamInductiveB (lamB (check Var))? = 1`. -/
theorem example_21_va {A : Type u} [CompleteBooleanAlgebra A] (Var : PSet.{u}) :
  lamInductiveB (AName.check (A := A) Var)

```

```

    (lamB (AName.check (A := A) Var)) = top :=
  lamInductiveB_lamB (AName.check (A := A) Var)

/-- Proposition 22: `lamB (check Var)` is `?(check Var)`-inductive and least. -/
theorem proposition_22 {A : Type u} [CompleteBooleanAlgebra A] (Var : PSet.{u}) :
  lamInductiveB (AName.check (A := A) Var)
    (lamB (AName.check (A := A) Var)) = top /\
    forall X : AName.{u} A,
      lamInductiveB (AName.check (A := A) Var) X = top ->
        AName.subsetB (lamB (AName.check (A := A) Var)) X = top :=
  <lamInductiveB_lamB (AName.check (A := A) Var),
    fun _X h => lamB_least h>

/-- Proposition 22, leastness: if `?lamInductiveB X? = 1` then
`?lamB (check Var) subseteq X? = 1`. -/
theorem proposition_22_least {A : Type u} [CompleteBooleanAlgebra A]
  {Var : PSet.{u}} {X : AName.{u} A}
  (h : lamInductiveB (AName.check (A := A) Var) X = top) :
  AName.subsetB (lamB (AName.check (A := A) Var)) X = top :=
  lamB_least h

/-- Proposition 22, check-equality:
`?check (?(Var)) = lamB (check Var)? = 1`. -/
theorem proposition_22_check_eq {A : Type u} [CompleteBooleanAlgebra A]
  (Var : PSet.{u}) :
  AName.eqB (AName.check (A := A) (pLamSet Var))
    (lamB (AName.check (A := A) Var)) = top :=
  lamB_check_eq (A := A) Var

/-- Example 24: `lamEqB (checkVar Var)` is `fun`-inductive and contains `check(fun)`.
`checkVar Var` is the unfolding of `check Var` (`check_eq_mk`). -/
theorem example_24 {A : Type u} [CompleteBooleanAlgebra A] (Var : PSet.{u})
  [DecidableEq Var.Type] :
  lamEqInductiveB (checkVar (A := A) Var)
    (lamEqB (checkVar (A := A) Var)) = top /\
    AName.subsetB (AName.check (A := A) (pLamEqSet Var))
      (lamEqB (checkVar (A := A) Var)) = top :=
  <lamEqInductiveB_lamEqB (checkVar (A := A) Var),
    lamEq_check_subset (A := A) Var>

/-- Example 24 at `V^A`: `?lamEqInductiveB (lamEqB (checkVar Var))? = 1`. -/
theorem example_24_va {A : Type u} [CompleteBooleanAlgebra A] (Var : PSet.{u})
  [DecidableEq Var.Type] :
  lamEqInductiveB (checkVar (A := A) Var)
    (lamEqB (checkVar (A := A) Var)) = top :=
  lamEqInductiveB_lamEqB (checkVar (A := A) Var)

/-- Example 24, subset: `?check(fun) subseteq lamEqB (checkVar Var)? = 1`. -/
theorem example_24_subset {A : Type u} [CompleteBooleanAlgebra A]
  (Var : PSet.{u}) [DecidableEq Var.Type] :
  AName.subsetB (AName.check (A := A) (pLamEqSet Var))
    (lamEqB (checkVar (A := A) Var)) = top :=
  lamEq_check_subset (A := A) Var

/-- Definition 25: the four ground interpretation clauses. -/
theorem definition_25 {Var D : Type*} [DecidableEq Var] [CompleteLattice D]
  (R : ReflexiveDcpo D) (x : Var) (M N : Lam Var) (? : Valuation Var D)
  (hx : x in ?.domain) :
  interp R (Lam.var x) ? = ?.lookup x hx /\
  interp R (M.app N) ? = R.app (interp R M ?) (interp R N ?) /\
  interp R (Lam.abs x M) ? =
    R.lam (fun d => interp R M (?update x d)) /\
  interpClosed R N = interp R N Valuation.empty :=

```

```

    <interp_var R x ? hx, interp_app R M N ?, interp_abs R x M ?, interp_closed R N>

/-- Definition 25, variable clause: `?x?_? = ?(x)`. -/
theorem definition_25_var {Var D : Type*} [DecidableEq Var] [CompleteLattice D]
  (R : ReflexiveDcpo D) (x : Var) (? : Valuation Var D) (h : x in ?.domain) :
  interp R (Lam.var x) ? = ?.lookup x h :=
  interp_var R x ? h

/-- Definition 25, application clause: `?MN?_? = ?M?_? * ?N?_?`. -/
theorem definition_25_app {Var D : Type*} [DecidableEq Var] [CompleteLattice D]
  (R : ReflexiveDcpo D) (M N : Lam Var) (? : Valuation Var D) :
  interp R (M.app N) ? = R.app (interp R M ?) (interp R N ?) :=
  interp_app R M N ?

/-- Definition 25, abstraction clause:
`?fun x. M?_? = lam(fun d. ?M?_{?(x := d)})`. -/
theorem definition_25_abs {Var D : Type*} [DecidableEq Var] [CompleteLattice D]
  (R : ReflexiveDcpo D) (x : Var) (M : Lam Var) (? : Valuation Var D) :
  interp R (Lam.abs x M) ? = R.lam fun d => interp R M (?.update x d) :=
  interp_abs R x M ?

/-- Definition 25, closed terms: `?M? := ?M?_{}`. -/
theorem definition_25_closed {Var D : Type*} [DecidableEq Var] [CompleteLattice D]
  (R : ReflexiveDcpo D) (M : Lam Var) :
  interpClosed R M = interp R M Valuation.empty :=
  interp_closed R M

/-- [4, Theorem 5.4.4] substitution lemma, restricted to `N` free for `x`.
Unrestricted `interp_subst` is false: `Lam.subst` does not rename. -/
theorem definition_25_subst {Var D : Type*} [DecidableEq Var] [CompleteLattice D]
  (R : ReflexiveDcpo D) (M N : Lam Var) (x : Var) (? : Valuation Var D)
  (hfree : M.FreeFor x N) :
  interp R (M.subst x N) ? = interp R M (?.update x (interp R N ?)) :=
  interp_subst R M N x ? hfree

/-- [4, Theorem 5.4.4] b-soundness when `N` is free for `x` in `M`.
Capturing b is not claimed. -/
theorem definition_25_sound_beta {Var D : Type*} [DecidableEq Var]
  [CompleteLattice D] (R : ReflexiveDcpo D) (x : Var) (M N : Lam Var)
  (? : Valuation Var D) (hfree : M.FreeFor x N) :
  interp R ((Lam.abs x M).app N) ? = interp R (M.subst x N) ? :=
  interp_sound_beta R x M N ? hfree

/-- [4, Theorem 5.4.4] on the capture-free fragment: `LamEqNC M N` implies
`?M?_? = ?N?_?`. Not unrestricted `LamEq` (no a-rule; capturing b is
unsound for this `subst`). -/
theorem definition_25_sound {Var D : Type*} [DecidableEq Var] [CompleteLattice D]
  (R : ReflexiveDcpo D) {M N : Lam Var} (h : LamEqNC M N)
  (? : Valuation Var D) :
  interp R M ? = interp R N ? :=
  interp_sound R h ?

/-- [4, Theorem 5.4.4], closed form: capture-free equations are sound at
`?*?_?`. -/
theorem definition_25_sound_closed {Var D : Type*} [DecidableEq Var]
  [CompleteLattice D] (R : ReflexiveDcpo D) {M N : Lam Var}
  (h : LamEqNC M N) :
  interpClosed R M = interpClosed R N :=
  interpClosed_sound R h

/-- Theorem 26, pure-term fragment: the four Definition 25 clauses on the
Theorem 30 carrier. Not `(D, check Var, ?)^A`, not tag 3, and not
`SetoidF_A` membership. -/

```

```

theorem theorem_26_pure {A : Type u} [CompleteBooleanAlgebra A] {Var : Type*}
  [DecidableEq Var] (x : Var) (M N : Lam Var)
  (? : Valuation Var (EngelerCarrier (A := A)))
  (hx : x in ?.domain) :
  interpVA (A := A) (Lam.var x) ? = ?.lookup x hx /\
  interpVA (A := A) (M.app N) ? =
    engelerAppVA (A := A) (interpVA (A := A) M ?)
    (interpVA (A := A) N ?) /\
  interpVA (A := A) (Lam.abs x M) ? =
    engelerLamVA (A := A)
      (fun d => interpVA (A := A) M (?.update x d)) /\
  interpClosedVA (A := A) N =
    interpVA (A := A) N
    (Valuation.default (finsetToCanonical (A := A) {})) :=
  <interpVA_var (A := A) x ? hx, interpVA_app (A := A) M N ?,
  interpVA_abs (A := A) x M ?, interpVA_closed (A := A) N>

/-- Theorem 26, variable clause: `?x?^A_? = ?(x)`. -/
theorem theorem_26_var {A : Type u} [CompleteBooleanAlgebra A] {Var : Type*}
  [DecidableEq Var] (x : Var) (? : Valuation Var (EngelerCarrier (A := A)))
  (h : x in ?.domain) :
  interpVA (A := A) (Lam.var x) ? = ?.lookup x h :=
  interpVA_var (A := A) x ? h

/-- Theorem 26, application clause: `?MN?^A_? = ?M?^A_? * ?N?^A_?`. -/
theorem theorem_26_app {A : Type u} [CompleteBooleanAlgebra A] {Var : Type*}
  [DecidableEq Var] (M N : Lam Var)
  (? : Valuation Var (EngelerCarrier (A := A))) :
  interpVA (A := A) (M.app N) ? =
    engelerAppVA (A := A) (interpVA (A := A) M ?)
    (interpVA (A := A) N ?) :=
  interpVA_app (A := A) M N ?

/-- Theorem 26, abstraction clause:
`?fun x. M?^A_? = lam(fun d. ?M?^A_?(x := d))`. -/
theorem theorem_26_abs {A : Type u} [CompleteBooleanAlgebra A] {Var : Type*}
  [DecidableEq Var] (x : Var) (M : Lam Var)
  (? : Valuation Var (EngelerCarrier (A := A))) :
  interpVA (A := A) (Lam.abs x M) ? =
    engelerLamVA (A := A) fun d => interpVA (A := A) M (?.update x d) :=
  interpVA_abs (A := A) x M ?

/-- Theorem 26, closed terms: `?M?^A := ?M?^A_{}`. -/
theorem theorem_26_closed {A : Type u} [CompleteBooleanAlgebra A] {Var : Type*}
  [DecidableEq Var] (M : Lam Var) :
  interpClosedVA (A := A) M =
    interpVA (A := A) M
    (Valuation.default (finsetToCanonical (A := A) {})) :=
  interpVA_closed (A := A) M

/-- Theorem 26, substitution on the capture-free fragment. -/
theorem theorem_26_subst {A : Type u} [CompleteBooleanAlgebra A] {Var : Type*}
  [DecidableEq Var] (M N : Lam Var) (x : Var)
  (? : Valuation Var (EngelerCarrier (A := A)))
  (hfree : M.FreeFor x N) :
  interpVA (A := A) (M.subst x N) ? =
    interpVA (A := A) M (?.update x (interpVA (A := A) N ?)) :=
  interpVA_subst (A := A) M N x ? hfree

/-- Theorem 26, b-soundness when `N` is free for `x` in `M`. -/
theorem theorem_26_sound_beta {A : Type u} [CompleteBooleanAlgebra A]
  {Var : Type*} [DecidableEq Var] (x : Var) (M N : Lam Var)
  (? : Valuation Var (EngelerCarrier (A := A)))

```

```

(hfree : M.FreeFor x N) :
interpVA (A := A) ((Lam.abs x M).app N) ? =
  interpVA (A := A) (M.subst x N) ? :=
interpVA_sound_beta (A := A) x M N ? hfree

/-- Theorem 26, capture-free soundness on the Theorem 30 carrier. -/
theorem theorem_26_sound {A : Type u} [CompleteBooleanAlgebra A] {Var : Type*}
[DecidableEq Var] {M N : Lam Var} (h : LamEqNC M N)
(? : Valuation Var (EngelerCarrier (A := A))) :
interpVA (A := A) M ? = interpVA (A := A) N ? :=
interpVA_sound (A := A) h ?

/-- Theorem 26, closed form of capture-free soundness. -/
theorem theorem_26_sound_closed {A : Type u} [CompleteBooleanAlgebra A]
{Var : Type*} [DecidableEq Var] {M N : Lam Var} (h : LamEqNC M N) :
interpClosedVA (A := A) M = interpClosedVA (A := A) N :=
interpClosedVA_sound (A := A) h

/-- Theorem 26: the meta-lambda is `DeterminedByFiniteVA`. -/
theorem theorem_26_update_determined {A : Type u} [CompleteBooleanAlgebra A]
{Var : Type*} [DecidableEq Var] (M : Lam Var)
(? : Valuation Var (EngelerCarrier (A := A))) (x : Var) :
DeterminedByFiniteVA (A := A)
(fun d => interpVA (A := A) M (? .update x d)) :=
interpVA_update_determined (A := A) M ? x

/-- Theorem 26, packaged: clauses, determinedness of the meta-lambda, and
capture-free soundness on the Theorem 30 carrier. This remains the
weaker Engeler-carrier packaging. The internal `SetoidF_A` maps,
Definition 25 clauses, and full `LamEq` soundness are `theorem26Full` /
`theorem26Pure` / `theorem26Pure_sound`. -/
theorem theorem_26 {A : Type u} [CompleteBooleanAlgebra A] {Var : Type*}
[DecidableEq Var] (x : Var) (M N : Lam Var)
(? : Valuation Var (EngelerCarrier (A := A)))
(hx : x in ?.domain) (hfree : M.FreeFor x N) {P Q : Lam Var}
(heq : LamEqNC P Q) :
interpVA (A := A) (Lam.var x) ? = ?.lookup x hx /\
  interpVA (A := A) (M.app N) ? =

```

Lean 4 source (lines 801–826)

```

  engelerAppVA (A := A) (interpVA (A := A) M ?)
    (interpVA (A := A) N ?) /\
  interpVA (A := A) (Lam.abs x M) ? =
    engelerLamVA (A := A)
      (fun d => interpVA (A := A) M (? .update x d)) /\
  DeterminedByFiniteVA (A := A)
    (fun d => interpVA (A := A) M (? .update x d)) /\
  interpVA (A := A) ((Lam.abs x M).app N) ? =
    interpVA (A := A) (M.subst x N) ? /\
  interpVA (A := A) P ? = interpVA (A := A) Q ? :=
<interpVA_var (A := A) x ? hx, interpVA_app (A := A) M N ?,
  interpVA_abs (A := A) x M ?,
  interpVA_update_determined (A := A) M ? x,
  interpVA_sound_beta (A := A) x M N ? hfree,
  interpVA_sound (A := A) heq ?>

/-- Theorem 26, closed form of full `LamEq` soundness. The open form is
`theorem_26_sound_full` in `InterpVA`. Capture-free closed soundness
remains `theorem_26_sound_closed`. -/
theorem theorem_26_sound_closed_full {A : Type u} [CompleteBooleanAlgebra A]
{Var : Type*} [DecidableEq Var] [Infinite Var] {M N : Lam Var}
(h : LamEq M N) :
interpClosedVA (A := A) M = interpClosedVA (A := A) N :=

```

```
interpClosedVA_sound_full (A := A) h  
end Scott2026
```