

Equivalence of Scott’s Three Presentations of Domain Theory

Lars Warren Ericson¹

¹Catskills Research Company

¹https://github.com/catskillsresearch/scott_models

¹lars.ericson@catskillsresearch.com

July 11, 2026

ORCID: 0000-0001-8299-9361

Primary Category: cs.LO (Logic in Computer Science)

Secondary Category: math.LO (Logic)

Abstract

Dana Scott developed three presentations of the same class of domains: **continuous lattices** (1972), **neighbourhood systems** (PRG-19 / 1980–81), and **information systems** (1982). Each sibling formalization — [scott1972](#), [scott1980](#), [scott1982](#) — treats one presentation in isolation. This package (`ScottModels`) supplies the **bridge theorems**: order isomorphisms and constructivity audits showing that the three presentations determine the same domains (up to isomorphism), including products, separated sums, and function spaces at the information-system level, with a transport of 1972 Scott maps along the round presentation.

The Lean development is sorry-free. The **1980** $\leftrightarrow$ **1982** bridges and the round continuous lattice corner target `#print axioms` $\subseteq$ `{propext, Quot.sound}`. Classical choice appears where Scott’s 1972 topology is unavoidable (algebraic $\Rightarrow$ continuous; `ScottMap` conjugation) and in the trichotomy for separated sums.

1 Introduction

Scott notes in the 1982 ICALP paper that neighbourhood systems and information systems are equivalent “in a precise sense.” The mathematical folklore is stronger still: all three presentations carve out the same class of domains, related by ideal completion and the Scott topology. Until the bridges are checked in a proof assistant, that claim lives in the gap between three separately formalized libraries.

This article closes that gap. We do **not** re-prove Scott’s internal theorems; we import the finished sibling packages and build cross-presentation maps:

Presentation	Lean package	Characteristic object
Continuous lattices [Sco72]	<code>scott1972</code>	<code>IsContinuousLattice D</code> , way-below $\ll$, <code>ScottMap</code>
Neighbourhood systems [Sco81]	<code>scott1980</code>	<code>NeighborhoodSystem</code> , filters as domain elements
Information systems [Sco82]	<code>scott1982</code>	<code>InfoSys</code> , elements as consistent closed token sets

The main subtlety is that a naïve reading of “domains = filters of neighbourhoods” overstates the continuous-lattice corner: for a continuous lattice D , the filter $\{\uparrow a \mid a \leq x\}$ has retract x but properly contains the principal round filter $\{\uparrow a \mid a \ll x\}$. The correct identification is $D \simeq \mathbf{RoundFilter}$, not $\mathbf{raw} \mid \mid$.

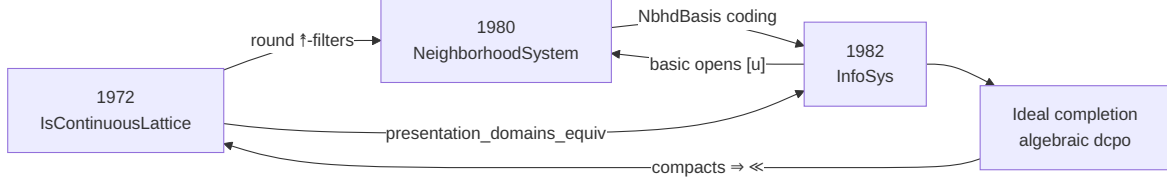


Figure 1: Introduction.

We prove **order isomorphisms of domains** (and of the named construction objects), not a 2-categorical equivalence of the full categories of continuous lattices / neighbourhood systems / information systems with all morphisms. Morphisms are linked where the sibling packages already supply them:

- approximable maps $\leftrightarrow$ Scott-continuous maps on $|A|$ (Factoid 4.6);
- Scott maps of continuous lattices $\leftrightarrow$ their conjugates on the round presentation.

A full functorial equivalence (preserving products, exponentials, and inverse limits simultaneously across all three presentations) would require additional coherence theorems.

2 Catalog of bridge theorems

Theorem	Direction	Lean module
<code>continuousLattice_to_neighborhoodSystem</code>	1972 $\rightarrow$ 1980	<code>ContinuousLatticeToNeighborhood.lean</code>
<code>neighborhoodSystem_to_infoSys</code>	1980 $\rightarrow$ 1982	<code>NeighborhoodToInfoSys.lean</code>
<code>infoSys_to_neighborhoodSystem</code>	1982 $\rightarrow$ 1980	<code>InfoSysToNeighborhood.lean</code>
<code>infoSys_to_idealCompletion</code>	1982 $\rightarrow$ algebraic	<code>InfoSysToIdealCompletion.lean</code>
<code>idealCompletion_to_continuousLattice</code>	algebraic $\rightarrow$ 1972	<code>IdealCompletionToContinuousLattice.lean</code>
<code>presentation_domains_equiv</code>	three-way	<code>PresentationDomains.lean</code>
<code>infoSys_constructions_equiv</code>	constructions	<code>InfoSysConstructions.lean</code> , <code>ScottMapBridge.lean</code>

The sibling packages are **finished dependencies**, not work items of this paper: `scott1972`, `scott1980`, and `scott1982` (information systems through Factoid 8.4 / domain equations). This package does **not** vendor their Lean sources; Lake path dependencies pull them in. Figure~2 is left-to-right: sibling packages on the left, local `ScottModels/` modules on the right, with arrows for **direct** imports (transitive imports inside the siblings are omitted). **Equivalence**

re-exports the bridges; only the `ScottMapBridge` $\rightarrow$ `Equivalence` edge is drawn to avoid clutter. Root `ScottModels.lean` also opens 1972 `ContinuousLattice.Specialization`, 1980 `Neighborhood.Basic`, and 1982 `InfoSys`.

3 Proof notes

3.1 Continuous lattices $\rightarrow$ neighbourhood systems

Claim. For a continuous lattice D , the sets $\uparrow a = \{z \mid a \ll z\}$ form a `NeighborhoodSystem` on token type D , and under `IsContinuousLattice` one has an order isomorphism $D \simeq \text{RoundFilter}$.

Construction. `wayBelowUp` a is upward closed; $\uparrow \perp = \text{univ}$; $\uparrow a \cap \uparrow b = \uparrow(a \sqcup b)$ (interpolation / directedness of way-below). Principal filters $\text{toFilter } x = \{\uparrow a \mid a \ll x\}$ are round: membership of $\uparrow a$ yields, by interpolation in a continuous lattice, some b with $a \ll b \ll x$, hence $\uparrow b \in \text{toFilter } x$.

Why raw `||` fails. The larger filter $\{\uparrow a \mid a \leq x\}$ still has `ofFilter` = x (supremum of codes), but is not equal to `toFilter` x whenever there are elements way-below strictly below x . Roundness ($\uparrow a \in f \Rightarrow \exists b, a \ll b \wedge \uparrow b \in f$) cuts exactly to the image of `toFilter`.

Axioms. `domainOrderIso` : $D \simeq \text{RoundFilter}$ audits to `{propext, Quot.sound}`.

3.2 Neighbourhood systems $\rightarrow$ information systems

Claim. A neighbourhood system equipped with a decidable exhaustive coding `NbhdBasis` ι α of its neighbourhood family induces an `InfoSys` on tokens ι with `||` $\simeq$ the `InfoSys` domain.

Construction. Tokens are neighbourhood indices. Consistency of a finite $u \subseteq \iota$ is membership of $\bigcap_{i \in u} \text{nbhd } i$ in (empty intersection = master set Δ). Entailment $u \vdash j$ means the intersection is a neighbourhood contained in `nbhd` j . Filters of the neighbourhood system correspond to `InfoSys` elements via the coding.

Constructivity. `DecidableEq` ι is required so `InfoSys` can use the choice-free `Finset` prelude from `scott1982`. The proof of `ent_con` avoids classical `by_cases` / `em`. Axioms $\subseteq \{\text{propext, Quot.sound}\}$.

3.3 Information systems $\rightarrow$ neighbourhood systems

Claim. For an information system A , the basic opens $[u] = \{x \in |A| \mid \uparrow u \subseteq x\}$ ($u \in \text{Con}$) form a `NeighborhoodSystem` on $|A|$, and filters recover elements: $|A| \simeq$ the filter domain.

Proof note. Scott's Factoid 4.6 supplies the basic-open vocabulary. The Lean proof initially pulled `Classical.choice` through `simp` on `basicOpen_empty` / finset unions; those `simps` were removed so the footprint stays `{propext, Quot.sound}`. Together with §3.2 this is the constructive $1980 \leftrightarrow 1982$ equivalence under coding.

3.4 Information systems $\rightarrow$ ideal completion

Claim. $|A| \simeq \text{Ideal } (\text{FiniteElement } A)$, where finite elements are closures of consistent finsets (Factoid 3.5).

Construction. `toIdeal` x is the ideal of finite approximants of x ; `ofIdeal` takes directed suprema of finite elements (1982 Factoids 4.4–4.5: `directedSup`, `eq_directedSup`, `finiteApproximants`, `compact_closure`). Axioms $\subseteq \{\text{propext, Quot.sound}\}$.

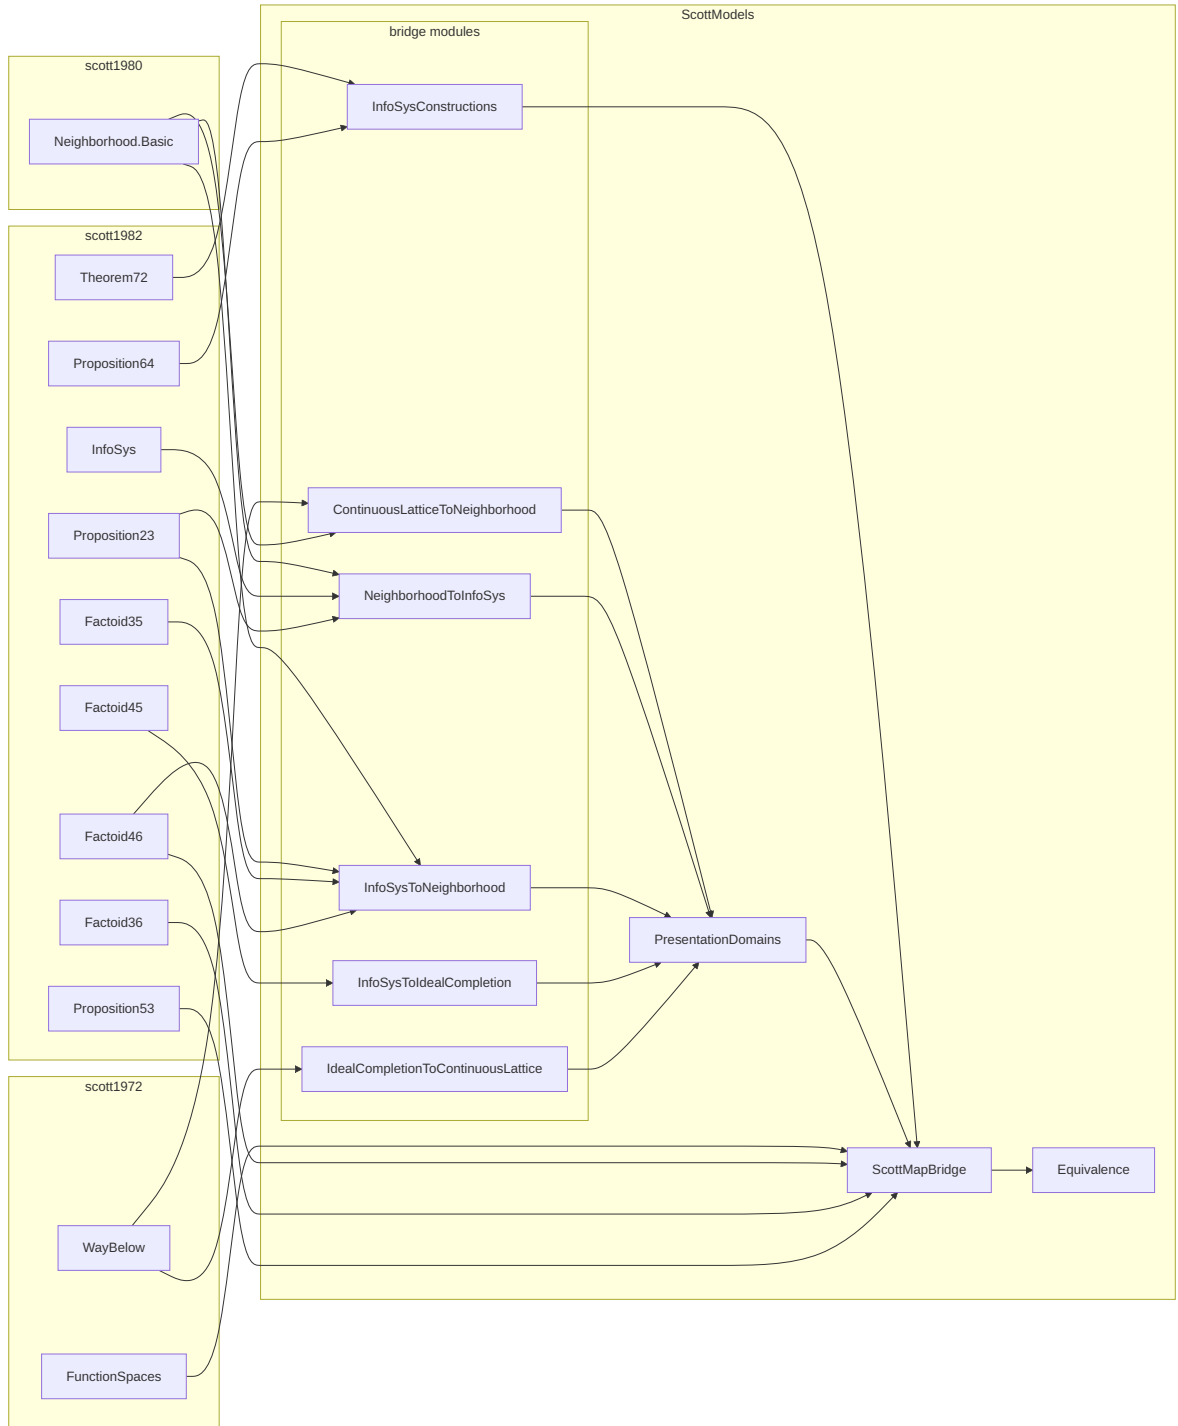


Figure 2: Lean module map.

3.5 Algebraic complete lattices $\rightarrow$ continuous lattices

Claim. If every element of a complete lattice is the directed supremum of compact elements below it (`IsAlgebraicLattice`), then `IsContinuousLattice` holds.

Proof note. Order-theoretic compactness implies `Set.Ici k` is Scott-open, hence $k \ll y$ whenever $k \leq y$. Algebraicity then yields $y = \sqcup \{k \text{ compact} \mid k \leq y\} \subseteq \sqcup \{x \mid x \ll y\}$. This is the **classical frontier**: Scott's $\ll$ is defined topologically in `scott1972`, so the footprint inherits that classicality even though the order argument is elementary.

3.6 Three-presentation equivalence (`presentation_domains_equiv`)

Claim. Under `IsContinuousLattice D` and `DecidableEq D`,

`D ?o RoundFilter ?o RoundInfoSysElement`

where `RoundInfoSysElement` is the subtype of elements of the `InfoSys` coded by `wayBelowNbhdBasis` (tokens = elements of `D`, neighbourhoods = $\uparrow a$) that correspond to round filters. An extended form routes through the ideal-completion subtype.

Glue. `wayBelowNbhdBasis` packages the $\uparrow$ -system as an `NbhdBasis`; `roundFilter_infoSys_iso` transports roundness along `NbhdBasis.domainOrderIso`; `presentation_domains_equiv` is the composite with `continuousLattice_roundFilter_iso`.

What is not claimed. `Raw ||` and the full `InfoSys` domain `|A|` remain properly larger than `D`. The equivalence is on the **round** corner that matches continuous lattice points.

Axioms. $\subseteq \{\text{proptext}, \text{Quot.sound}\}$.

3.7 Constructions (`infoSys_constructions_equiv`)

Products

$|A| \times |B| \simeq_o |A \times B|$ via `1982 pairElements / fstMap / sndMap` (Prop 6.2). Choice-free; axioms $\subseteq \{\text{proptext}, \text{Quot.sound}\}$.

Separated sums

`WithBot (|A|  $\oplus$  |B|)  $\simeq_o$  |A + B|` via `inl / inr classify-and-assemble` (Prop 6.4). Trichotomy on token polarity uses classical case-split (`Classical.choice` in the footprint).

Function spaces

`ApproximableMap A B  $\simeq_o$  |A  $\rightarrow$  B|` packages Theorem 7.2 (`approxMap_toElement / element_toApproxMap`) with pointwise `Le` as `PartialOrder`. Axioms $\subseteq \{\text{proptext}, \text{Quot.sound}\}$.

Factoid 4.6 bridge

`ApproximableMap A B  $\simeq_o$  ScottContinuous A B` via `toScottContinuous / ofScottContinuous`, using Prop 5.3(v) (`rel_iff_closure_le`) and `closure_le_element` for the round-trip on relations. Constructive: $\{\text{proptext}, \text{Quot.sound}\}$.

ScottMap conjugation

A 1972 `ScottMap D E` conjugates along any pair of order isomorphisms $\iota D : D \simeq_o D'$, $\iota E : E \simeq_o E'$ to a pointwise-ordered map $D' \rightarrow E'$. Specializing to `continuousLattice_roundFilter_iso / presentation_domains_equiv` yields `scottMap_roundFilter_iso` and `scottMap_roundInfoSys_iso`. The conjugation itself is order-theoretic; the footprint includes `Classical.choice` because `ScottMap` is defined via Scott continuity in `scott1972`.

Out of scope (documented). Identifying `ApproximableMap` on the coded $\uparrow$ -`InfoSys` with `ScottMap D E` (needs roundness preservation of approximable maps), and relating `wayBelow(D  $\times$  E)` to the `InfoSys` product of factors (cylinder basis).

4 Constructivity summary

Bridge	Footprint	Notes
Nbhd $\leftrightarrow$ InfoSys (both directions)	<code>{propext, Quot.sound}</code>	Decidable coding; avoid classical <code>simp</code> traps
CL $\leftrightarrow$ RoundFilter	<code>{propext, Quot.sound}</code>	Roundness is order-theoretic
InfoSys $\leftrightarrow$ Ideal	<code>{propext, Quot.sound}</code>	Factoids 4.4–4.5
Algebraic $\Rightarrow$ CL	classical	1972 topological $\ll$
Product / function space (1982)	<code>{propext, Quot.sound}</code>	
Separated sum (1982)	<code>+ Classical.choice</code>	Token polarity trichotomy
Factoid 4.6 ApproxMap $\leftrightarrow$ ScottContinuous	<code>{propext, Quot.sound}</code>	
ScottMap conjugation	<code>+ Classical.choice</code>	Via 1972 ScottMap

Target discipline (from the 1982 package): prefer constructive proofs wherever Scott’s 1982 text emphasizes constructivity; call out classical frontiers explicitly rather than hiding choice in automation.

5 Worked example — S-expressions / trees

Lean packaging: [WorkedExampleSExpr.lean](#).

5.1 Overview

The bridges of §§2–3 are abstract. This section fixes **one** concrete domain — Scott’s S-expression / tree equation $T \cong A + (T \times T)$ ([Sco82], Factoid 8.1) over the $\mathbb{N}$ lower-bound atom system (Factoid 2.4) — and asks what that domain looks like in each paradigm:

Paradigm	What an element of T is
1982	a consistent, deductively closed set of tree tokens
1980	a filter of basic opens <code>[u]</code> on that token domain
1972	a point of an algebraic continuous lattice (ideal of finite elements)

We build the domain natively as an information system (§5.2), then **read the same carrier** as a neighbourhood system (§5.3) and as a continuous lattice (§5.4). Section 5.5 exhibits the order isomorphisms for this instance — so that, on S-expressions,

$T_{1982} \simeq_o T_{1980} \simeq_o \text{Ideal}(K(T))$ and $\text{Ideal}(K(T))$ is a continuous lattice,

hence transitively $T_{1982} \simeq_o T_{1980}$ and (via the algebraic $\Rightarrow$ continuous frontier) the 1972 presentation of the same domain. Order isomorphism is an equivalence relation, so the three presentations determine one domain up to $\simeq_o$. Section 5.6 records two extras that live on top of the carriers: the domain equation at the level of domains, and identity as a morphism in both the approximable-map and Scott-continuous languages.

5.2 Information system (1982)

Atoms are propositions $n \leq x$ on $\mathbb{N}$ (`lowerBoundSystem`). The tree system `SexSys := treeSystem lowerBoundSystem` has inductive tokens `TreeToken` $\mathbb{N}$ (`bot` / `atom` / `pairL` / `pairR`). Consistency and entailment are Scott’s sum×product clauses; Factoid 8.1 records that this is literally the information system of the right-hand side $A + (T \times T)$:

- `SexRhs = sumSystem A (productSystem T T) (sexRhs_eq_sum_product);`
- token unfolding `treeUnfold` sends `atom n` to the left summand (`sexUnfold_atom`).

Finite elements include singleton atom closures `sexAtom n = for u = {atom n}`. Elements of $|T|$ are the consistent closed sets of tokens — the 1982 presentation of the S-expression domain.

5.3 Neighbourhood system (1980)

From $|T|$ one obtains a neighbourhood system whose basic opens are $[u] = \{x \in |T| \mid \uparrow u \subseteq x\}$. In this paradigm an element of the domain is a **filter** of such opens (not a raw set of tokens). Nothing new is invented: it is the image of `SexSys` under `InfoSysToNeighborhood`. The concrete iso of §5.5 below is exactly “read each token-element as its filter of basic opens.”

5.4 Continuous lattice (1972)

Finite elements $K(T)$ are the closures of consistent finsets. In the algebraic style that feeds Scott’s 1972 theory, a domain element is an **ideal** of $K(T)$ — the ideal completion of the compact basis. That poset of ideals is an algebraic complete lattice, hence a continuous lattice (`IsAlgebraicLattice` $\Rightarrow$ `IsContinuousLattice`, §3.5). This is the 1972 presentation of the same S-expression domain: points ordered by inclusion of ideals, with way-below recovered from the compact basis.

We do not claim a choice-free $D \simeq_o$ `RoundFilter` story built from trees alone; the round $\uparrow$ -filter identification of §3.1 applies once one is already in the continuous-lattice setting.

5.5 Equivalence for this instance

Specializing the bridges of §3 to `SexSys` yields order isomorphisms of carriers:

- `sexNeighborhoodIso : |T|  $\simeq_o$  filters of [u] (InfoSysToNeighborhood.domainOrderIso)`
— **1982 $\simeq_o$ 1980;**
- `sexIdealIso : |T|  $\simeq_o$  Ideal (FiniteElement T) (InfoSysToIdealCompletion.domainOrderIso)`
— **1982 $\simeq_o$ algebraic / 1972 carrier;**
- `sexNeighborhoodIdealIso (neighborhood_ideal_iso)` — the constructive triangle closing **1980 $\simeq_o$ Ideal($K(T)$)** without going back through tokens.

Composing any two edges recovers the third: isomorphism is transitive, so on this example the three presentations are pairwise equivalent. The only classical step on the 1972 corner is the algebraic $\Rightarrow$ continuous implication already flagged in §3.5 / §4; the neighbourhood $\leftrightarrow$ information $\leftrightarrow$ ideal triangle audits to `{propext, Quot.sound}`.

5.6 Domain equation and morphisms

Beyond identifying the carriers, the same example exercises constructions and maps.

Domain equation. This article’s product and separated-sum isos lift Factoid 8.1 from tokens to domains:

`sexDomainEquationIso : WithBot (|A|  $\oplus$  (|T|  $\times$  |T|))  $\simeq_o$  |A + (T  $\times$  T)|`

(classical footprint only through the sum trichotomy). So the S-expression equation holds not only as information systems but as ordered domains.

Morphisms. The identity approximable map `idMap T` (Prop 5.4) transports along Factoid 4.6 to a Scott-continuous endomap `sexIdScottContinuous` with `toFun = id (sexId_toElement)` — the same endomap, named once in each morphism language.

Axioms. Object-level neighbourhood / ideal isos and Factoid 4.6 for `idMap` audit to `{propext, Quot.sound}` up to the usual classical sum iso in `sexDomainEquationIso`.

6 Acknowledgments

- **Dana Scott** — *Continuous Lattices* [Sco72], *Lectures on a Mathematical Theory of Computation* (PRG-19) [Sco81], and *Domains for Denotational Semantics* [Sco82], the three presentations this development relates.

6.1 AI-assisted development

The human author retains sole responsibility for the mathematical content, the choice of formalization route, and every formal claim in this work. Following standard publisher practice (e.g., COPE guidance on authorship and AI tools [COPE24]), **no large language model is listed as a co-author** — authorship implies an accountability that automated systems cannot bear.

Because this development may borrow Lean and proof patterns from the sibling formalizations `scott1972` [SR72], `scott1980` [ER80], and `scott1982` [SR82], **every model in the registry is treated as used** for acknowledgement purposes. We gratefully acknowledge assistance from the following tools (auto-generated from `scripts/ai_model_cards.py` when building `arxiv.tex`):

- **Cursor** [Cur26] — agent-assisted editing in the Cursor IDE: bridge theorems relating Scott’s 1972 / 1980 / 1982 presentations in Lean 4 / `mathlib`, `lake build` repair, drafting this narrative (`arxiv.md`), and tracking the formalized inventory. Generated Lean was provisional until it compiled under the pinned toolchain. Also used in the sibling formalizations whose portable work may be copied into this repo.
- **Cursor Composer 2.5 Fast** [Cmp25] — routine multi-step work: module scaffolding, dependency-ordered wiring of `ScottModels/`, documentation and Mermaid blueprints, and medium proof obligations where the strategy was already fixed (`composer-2.5`). Also used in sibling repos whose portable Lean may be adapted here.
- **Cursor Grok 4.5** [Grk45] — primary agent model for the `scott_models` sessions: bridge theorems (`presentation_domains_equiv`, round filters, constructions), inventory design in `arxiv.md`, constructivity audits, and adaptation of portable patterns from prior Scott formalizations. Jointly trained by SpaceXAI and Cursor; used here via the Cursor agent environment.

- **Anthropic Claude Sonnet 5 (medium reasoning)** [Son26] — day-to-day formalization and proof-engineering in Cursor at the medium reasoning tier in sibling Scott formalizations (and available for this repo): inventory and narrative maintenance, module wiring, and medium-complexity Lean obligations where the proof strategy was already fixed. Listed because portable prior work may be copied into `scott_models`.
- **Anthropic Claude Opus 4.8 (high reasoning)** [Ant26] — selective use for the heaviest proof work in sibling formalizations (e.g. continuous lattices and PRG-19). Every emitted proof term was checked by the Lean kernel. Listed because portable prior work may be copied into `scott_models`.
- **Google Gemini 3.5 Flash** [Gem25] — exploratory passes in sibling formalizations (typographic conventions, scope decisions). Listed because portable prior work may be copied into `scott_models`.

All definitions, constructivity audits, and final prose were reviewed by the human author, who takes full responsibility for them.

6.2 Artifact availability and reproducibility

The development is at github.com/catskillsresearch/scott_models. GitHub Actions CI checks out the three sibling packages as path dependencies and runs `lake build`; the library builds successfully on `main` (green status).

Locally:

```
lake exe cache get
lake build ScottModels
```

Sibling packages `scott1972`, `scott1980`, `scott1982` are Lake path dependencies (`lakefile.toml`). Session state lives in `HANDOFF.md`; `arxiv.md` is the durable inventory and proof narrative. Axiom audits: `#print axioms` on the blueprint-facing names (`presentation_domains_equiv`, `infoSys_product_domain_equiv`, `approximableMap_scottContinuous_equiv`, `scottMap_roundInfoSys_iso`, ...).

Build the arXiv PDF / submission zip (Lean Code appendix = GitHub hyperlinks):

```
bash scripts/build_arxiv_tex.sh      # arxiv.md -> arxiv.tex + figures/
bash scripts/build_arxiv_pdf.sh      # compile PDF + package dist/arxiv_submit.zip
# or: bash scripts/package_arxiv_submit.sh
```

List of Figures

1	Introduction.	2
2	Lean module map.	4

7 References

- [Sco72] Dana Scott. *Continuous Lattices*. In F. W. Lawvere (ed.), *Toposes, Algebraic Geometry and Logic*, LNM 274, Springer, 1972.
- [Sco81] Dana Scott. *Lectures on a Mathematical Theory of Computation*. Technical Monograph PRG-19, Oxford University Computing Laboratory, 1981 (neighbourhood systems).
- [Sco82] Dana Scott. *Domains for Denotational Semantics*. ICALP 1982, LNCS 140, Springer, 1982.

- [AJ94] S. Abramsky and A. Jung. *Domain Theory*. In *Handbook of Logic in Computer Science*, Vol. 3, Oxford University Press, 1994.
- [GHKLMS03] G. Gierz et al. *Continuous Lattices and Domains*. Cambridge University Press, 2003.
- [SR72] Companion Lean formalization: [scott1972](#).
- [ER80] Companion Lean formalization: [scott1980](#).
- [SR82] Companion Lean formalization: [scott1982](#).
- [COPE24] Committee on Publication Ethics (COPE). *Authorship and AI tools: COPE position statement*. 2024. <https://publicationethics.org/guidance/cope-position/authorship-and-ai-tools>
- [Cur26] Anysphere, Inc. *Cursor: AI-native code editor and agent environment*. <https://cursor.com> (accessed 2026).
- [Cmp25] Anysphere, Inc. *Composer 2.5*. Model announcement and documentation, <https://cursor.com/blog/composer-2-5>; model card as integrated in Cursor, <https://cursor.com/docs/models> (accessed 2026).
- [Grk45] SpaceXAI and Anysphere, Inc. *Grok 4.5*. Model documentation, <https://docs.x.ai/developers/models/grok-4.5>; Cursor announcement, <https://cursor.com/blog/grok-4-5> (accessed 2026).
- [Son26] Anthropic. *Claude Sonnet 5* (medium reasoning variant). System card, <https://www.anthropic.com/claude-sonnet-5-system-card>; model documentation as integrated in Cursor, <https://cursor.com/docs/models> (accessed 2026).
- [Ant26] Anthropic. *Claude Opus 4.8* (high thinking/reasoning variant). System card and announcement, <https://www.anthropic.com/news/claude-opus-4-8>; model documentation as integrated in Cursor, <https://cursor.com/docs/models/claude-opus-4-8> (accessed 2026).
- [Gem25] Google DeepMind. *Gemini 3.5 Flash*. Technical documentation and model cards. <https://ai.google.dev/gemini-api/docs/models> (accessed 2026).

A Lean Code

All Lean 4 modules in the [scott_models](#) repository are listed below as GitHub links (sources stay on GitHub; nothing is inlined in the arXiv PDF). Order matches [ScottModels.lean](#).

A.1 Root

- [ScottModels.lean](#) — https://github.com/catskillsresearch/scott_models/blob/main/ScottModels.lean

A.2 Library (import order)

- `ScottModels/NeighborhoodToInfoSys.lean` — https://github.com/catskillsresearch/scott_models/blob/main/ScottModels/NeighborhoodToInfoSys.lean
- `ScottModels/InfoSysToNeighborhood.lean` — https://github.com/catskillsresearch/scott_models/blob/main/ScottModels/InfoSysToNeighborhood.lean
- `ScottModels/ContinuousLatticeToNeighborhood.lean` — https://github.com/catskillsresearch/scott_models/blob/main/ScottModels/ContinuousLatticeToNeighborhood.lean
- `ScottModels/InfoSysToIdealCompletion.lean` — https://github.com/catskillsresearch/scott_models/blob/main/ScottModels/InfoSysToIdealCompletion.lean
- `ScottModels/IdealCompletionToContinuousLattice.lean` — https://github.com/catskillsresearch/scott_models/blob/main/ScottModels/IdealCompletionToContinuousLattice.lean
- `ScottModels/PresentationDomains.lean` — https://github.com/catskillsresearch/scott_models/blob/main/ScottModels/PresentationDomains.lean
- `ScottModels/InfoSysConstructions.lean` — https://github.com/catskillsresearch/scott_models/blob/main/ScottModels/InfoSysConstructions.lean
- `ScottModels/ScottMapBridge.lean` — https://github.com/catskillsresearch/scott_models/blob/main/ScottModels/ScottMapBridge.lean
- `ScottModels/WorkedExampleSEExpr.lean` — https://github.com/catskillsresearch/scott_models/blob/main/ScottModels/WorkedExampleSEExpr.lean
- `ScottModels/Equivalence.lean` — https://github.com/catskillsresearch/scott_models/blob/main/ScottModels/Equivalence.lean