A short bounded hold recovers most sibling reuse; waiting without a limit can wait out a timeout
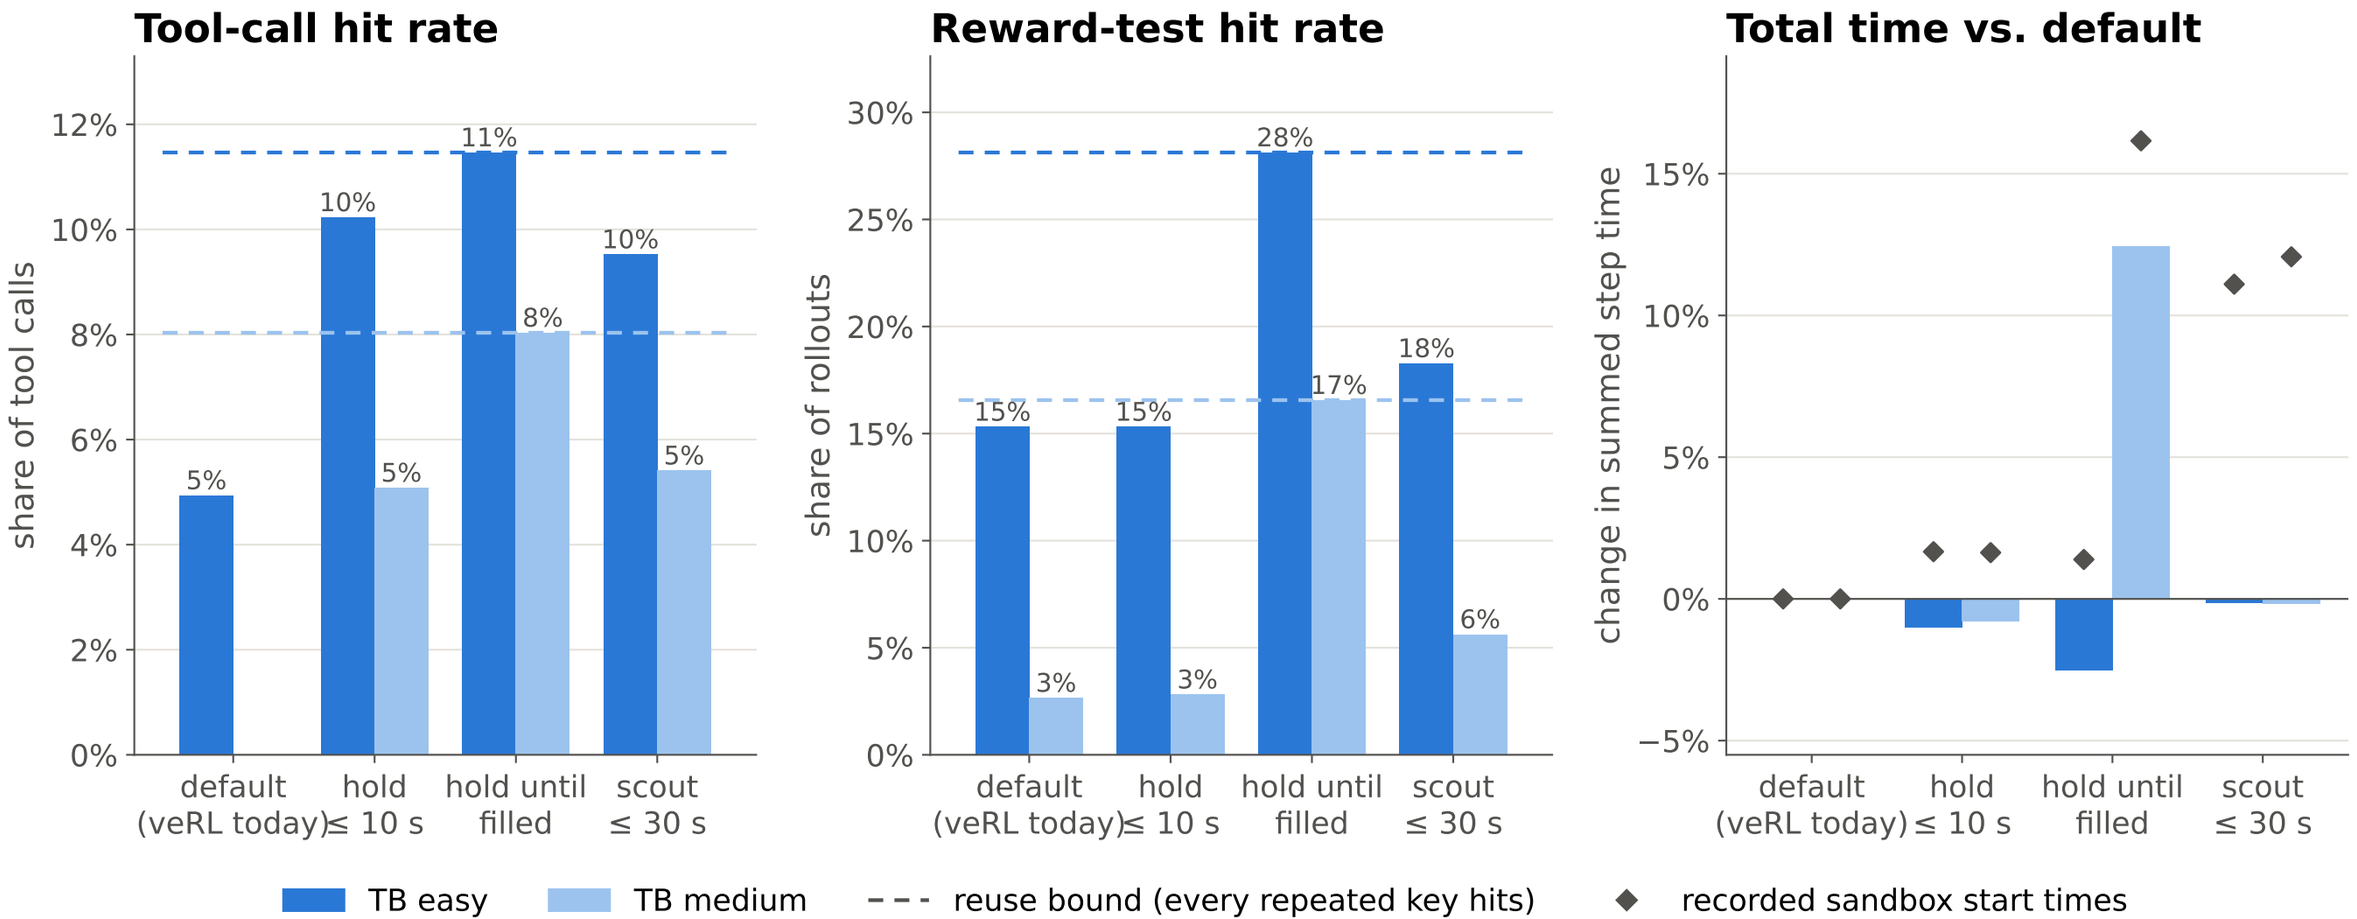
Simulated on the full Terminal-Bench traces (Qwen2.5-1.5B, 4 prompts × 8 rollouts × 20 steps, cache on). Bars: sandbox starts queue on the node's start lock