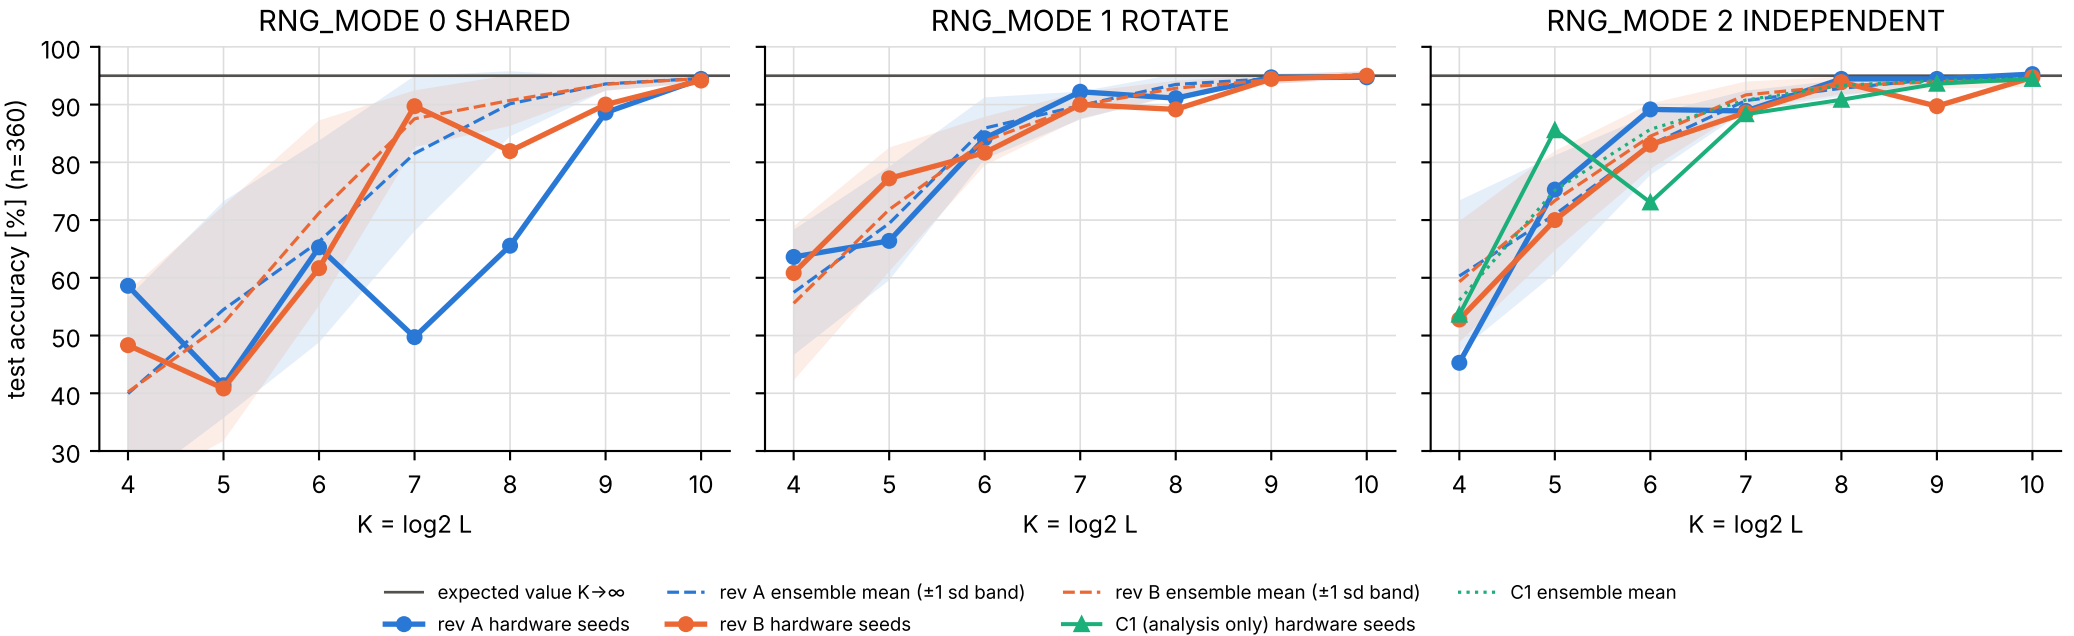
Rev A vs rev B LFSR seeds — SIMULATION, same weights (qat_noise), 20 start offsets
RNG_MODE 0 SHARED
RNG_MODE 1 ROTATE
RNG_MODE 2 INDEPENDENT
test accuracy [%] (n=360)
100
90
80
70
60
50
40
30
4
5
6
7
8
9
10
K = log2 L
expected value K→∞
rev A ensemble mean (±1 sd band)
rev B ensemble mean (±1 sd band)
C1 ensemble mean
rev A hardware seeds
rev B hardware seeds
C1 (analysis only) hardware seeds