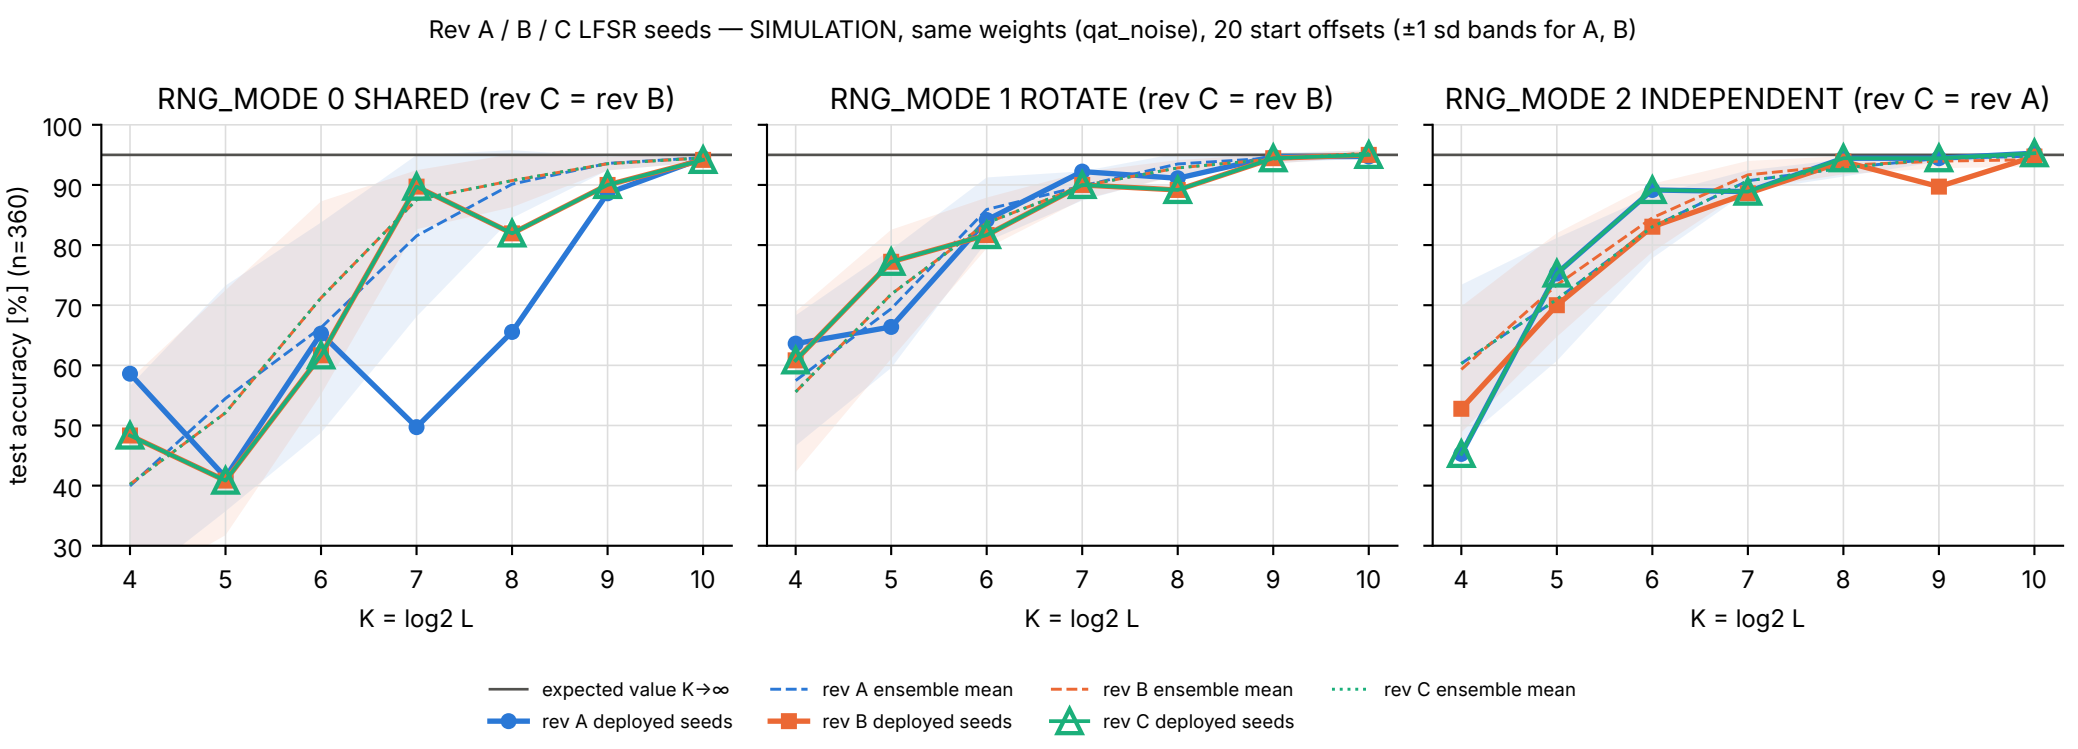
Rev A / B / C LFSR seeds — SIMULATION, same weights (qat_noise), 20 start offsets (±1 sd bands for A, B)
RNG_MODE 0 SHARED (rev C = rev B)
RNG_MODE 1 ROTATE (rev C = rev B)
RNG_MODE 2 INDEPENDENT (rev C = rev A)
test accuracy [%] (n=360)
100
90
80
70
60
50
40
30
4
5
6
7
8
9
10
K = log2 L
expected value K→∞
rev A deployed seeds
rev A ensemble mean
rev B deployed seeds
rev B ensemble mean
rev C deployed seeds
rev C ensemble mean