


1. if statement



The screenshot shows the OneCompiler online IDE. The interface includes a header with the OneCompiler logo and a settings icon. Below the header, there are tabs for 'Code' and 'Output', and buttons for 'AI' and 'RUN'. A file named 'HelloWorld.php' is open in the editor. The code in the editor is as follows:

```
1 <?php
2 $age = 20;
3
4 if ($age >= 18) {
5     echo "You are an adult.";
6 }
7 ?>
```

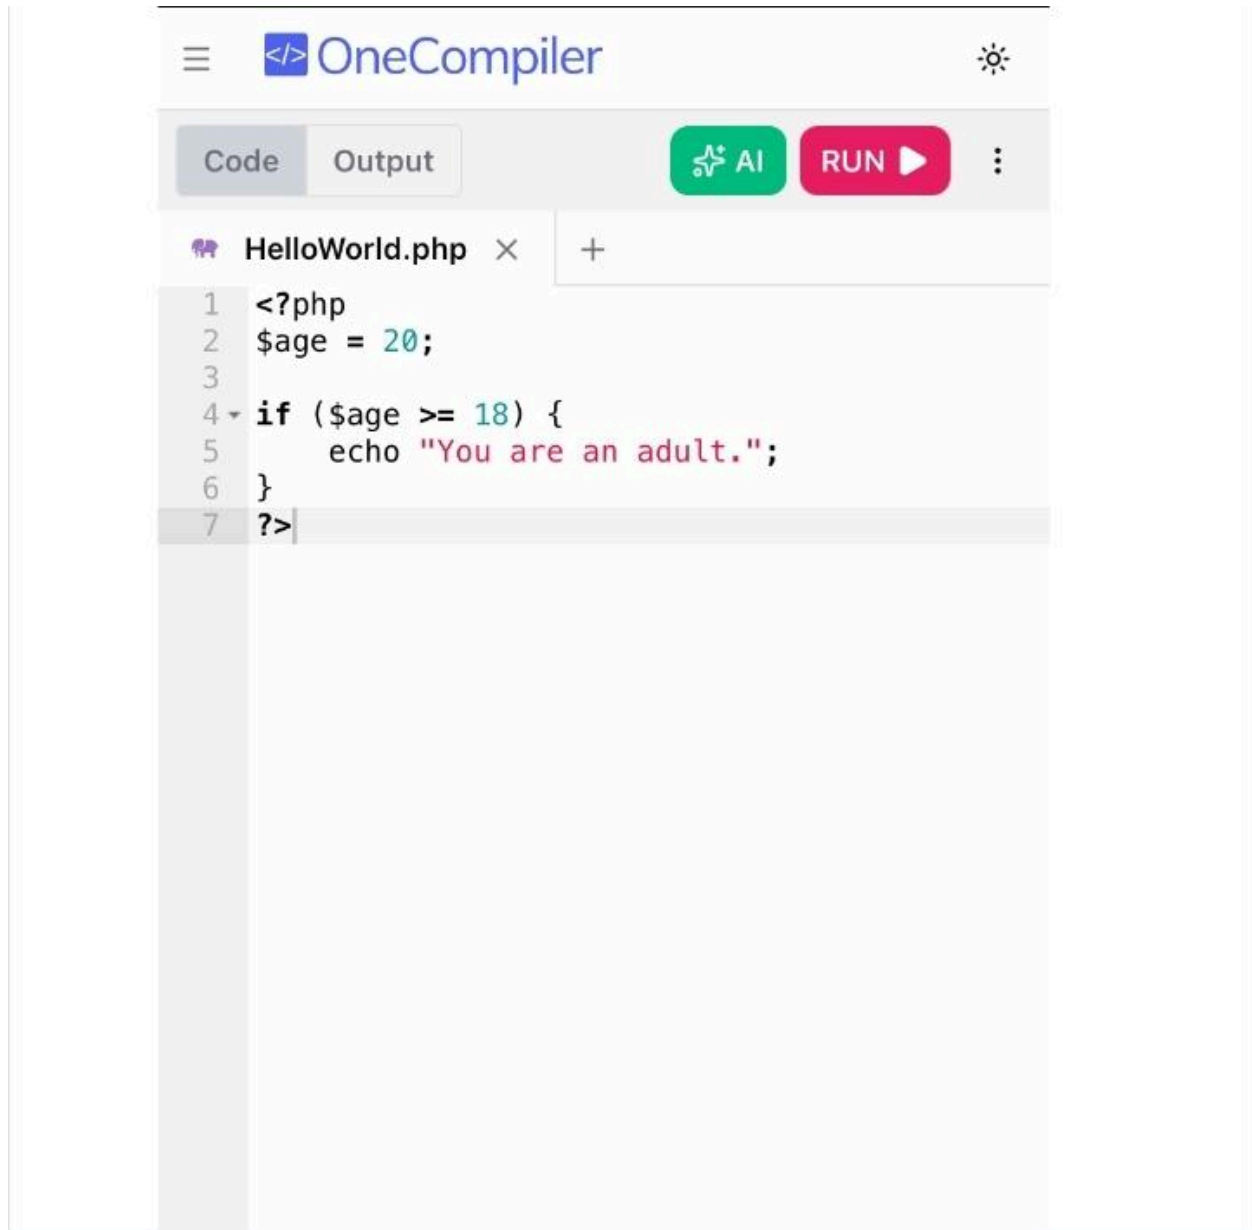

 OneCompiler



Code

Output



AI

RUN



 Console

 I/O

 AI Agent


207 ms



You are an adult.



2. if - else statement

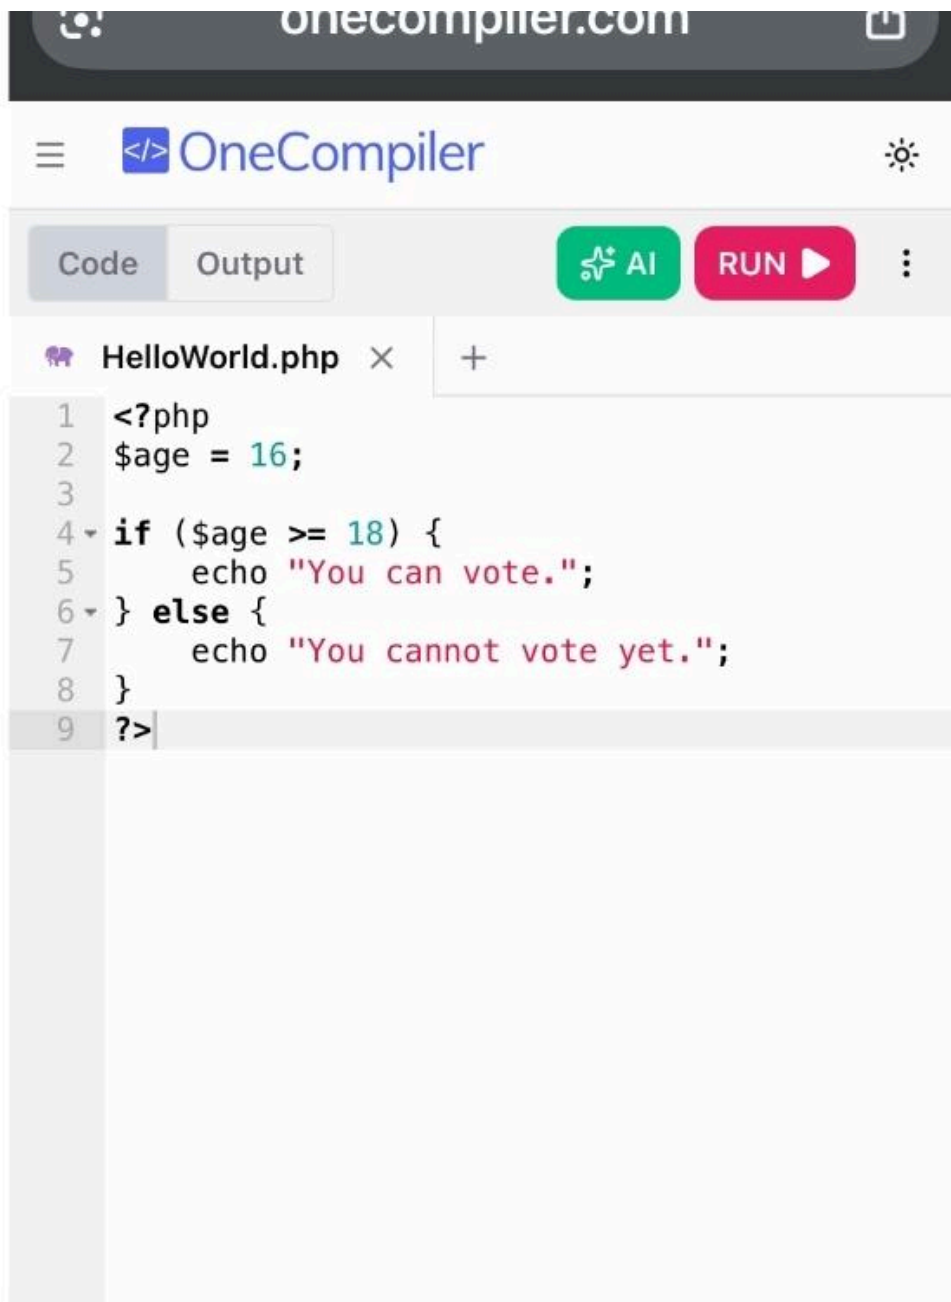

The screenshot shows the OneCompiler web interface. At the top, the URL 'onecompiler.com' is visible in the browser's address bar. Below the address bar, the OneCompiler logo is displayed. The interface includes a 'Code' tab and an 'Output' tab. A green 'AI' button and a red 'RUN' button are located to the right of the tabs. A file named 'HelloWorld.php' is open in the editor. The code in the editor is as follows:

```
1 <?php
2 $age = 16;
3
4 if ($age >= 18) {
5     echo "You can vote.";
6 } else {
7     echo "You cannot vote yet.";
8 }
9 ?>
```

Code

Output

✦ AI

RUN ▶

⋮

☰ Console

📄 I/O

✦ AI Agent

219 ms



You cannot vote yet.



3. if-else, if-else statement



The screenshot shows the OneCompiler web IDE interface. At the top, there is a menu icon, the OneCompiler logo, and a settings icon. Below this is a tab bar with 'Code' and 'Output' tabs, and buttons for 'AI', 'RUN', and a vertical ellipsis. A file tab labeled 'HelloWorld.php' is open. The code editor displays a PHP script with line numbers 1 through 11. The script defines a variable \$grade and uses an if-elseif-else statement to output different messages based on the grade value.

```
1 <?php
2 $grade = 85;
3
4 if ($grade >= 90) {
5     echo "Excellent!";
6 } elseif ($grade >= 75) {
7     echo "Pasado ka boi!";
8 } else {
9     echo "Bagsak ka man back to lobby.";
10 }
11 ?>
```



 OneCompiler



Code

Output

 AI

RUN 



 Console

 I/O


 AI Agent

153 ms 

Pasado ka boi!



4. switch statement

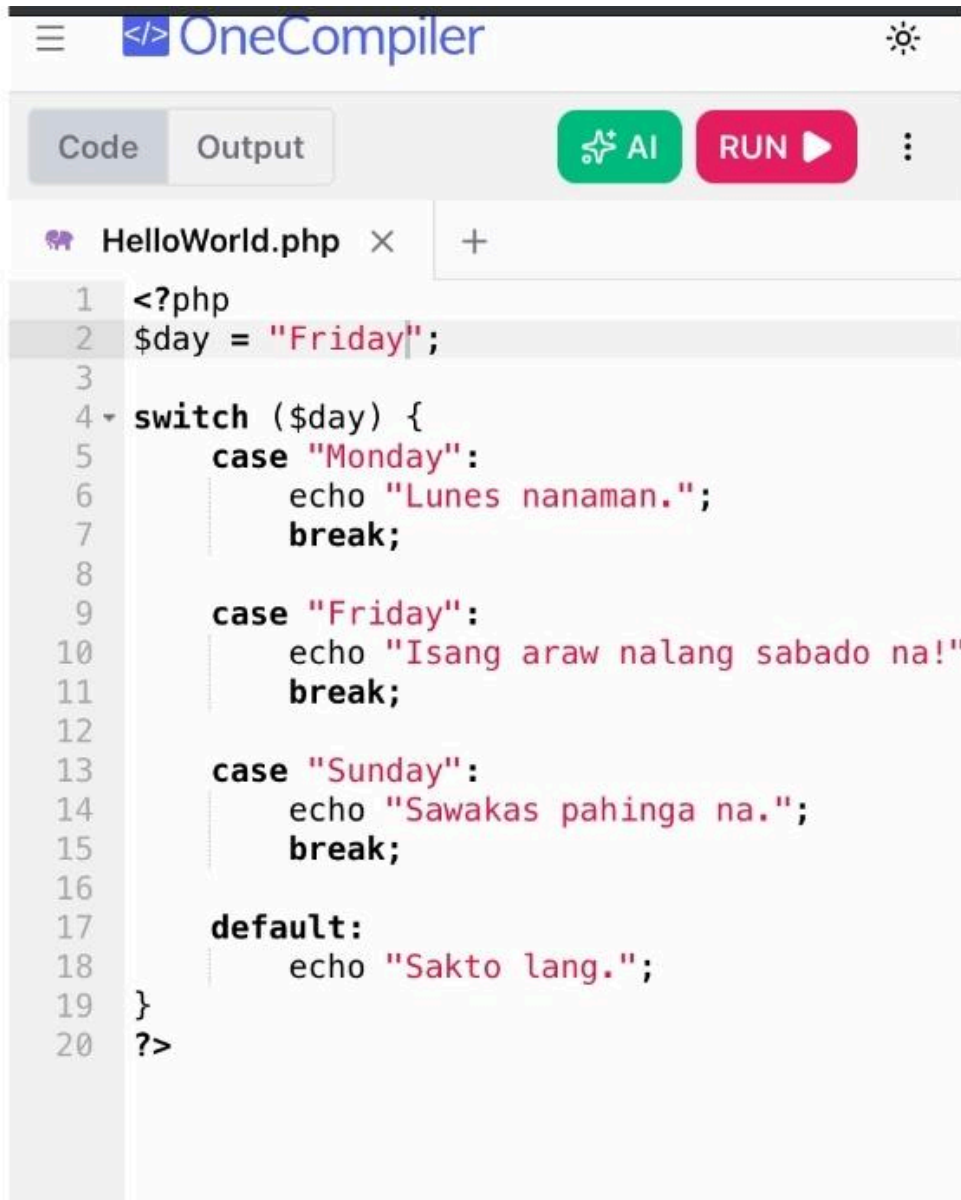

The screenshot shows the OneCompiler online PHP editor interface. The top bar includes a hamburger menu, the OneCompiler logo, and a settings icon. Below the bar are tabs for 'Code' and 'Output', a green 'AI' button, a red 'RUN' button with a play icon, and a vertical ellipsis menu. The file name 'HelloWorld.php' is displayed in the editor's title bar. The code editor contains a PHP script that uses a switch statement to check the value of a variable named \$day. The switch statement has three cases: 'Monday' (output: 'Lunes nanaman.'), 'Friday' (output: 'Isang araw nalang sabado na!'), and 'Sunday' (output: 'Sawakas pahinga na.'). A default case outputs 'Sakto lang.'. The code is as follows:

```
1 <?php
2 $day = "Friday";
3
4 switch ($day) {
5     case "Monday":
6         echo "Lunes nanaman.";
7         break;
8
9     case "Friday":
10        echo "Isang araw nalang sabado na!";
11        break;
12
13    case "Sunday":
14        echo "Sawakas pahinga na.";
15        break;
16
17    default:
18        echo "Sakto lang.";
19 }
20 ?>
```



 OneCompiler



Code

Output



AI

RUN



Console



I/O



AI Agent

167 ms



Isang araw nalang sabado na!