

Neural Implicit Flow (NIF)

Christian Beneke

28.11.2024

Problem Statement

- Spatio-temporal data modeled by PDEs is computationally challenging.
- Current reduction methods (SVD, CAE) fail with variable geometry or adaptive meshing.
- Need for a scalable, mesh-agnostic approach for real-time engineering applications.

New Approach: Neural Implicit Flow (NIF)

- Combines two neural networks:
 - **ShapeNet**: Encodes spatial complexity mesh-agnostically.
 - **ParameterNet**: Models temporal and parametric dependencies.
- Provides efficient, nonlinear dimensionality reduction and interpretable representations.

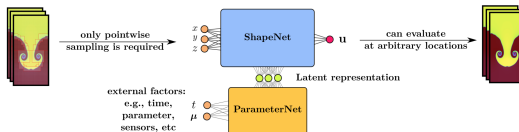


Figure: NIF Hypernetwork Architecture

- Results
 - 40% better generalization performance
 - Scalable to complex spatio-temporal datasets
- Performance tuning of the provided implementation.
- Re-Evaluation of the results

My Contributions - Performance tuning

- Performance tuning of the provided implementation.
 - Port from Tensorflow to PyTorch
 - Implementation using upstream SIREN
 - Improving parallelism in learning phase

- Re-Evaluation of results - with focus on chaotic systems
 - Comparison to other Hypernetworks / LoRA / etc
 - Comparing the existing results using own implementation