

## Welcome to Pusher!

### 1 Name your app

civic-peak-735

### 2 Select a cluster

mt1 (us-east-1)


☐

Create apps for multiple environments?

### 3 What's your front-end tech?



### 4 What's your back-end tech?

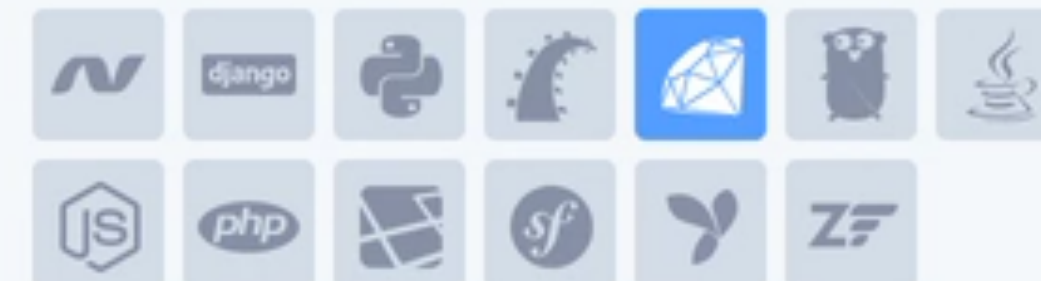

### 5 Share your app


You can invite others as collaborators to your app

hello@example.com



Skip

Create my app

PUSHER

NEW! Click to configure Push Notifications

TutorialsDocumentationSupport

Dashboard

Your apps

Account stats

Billing

civic-peak-735MT1 (US-EAST-1)

OverviewGetting StartedApp KeysStatsDebug ConsoleWebhooksPush NotificationsBETACollaboratorsApp Settings

1Add this to your client

JavaScriptiOS (Obj-C)iOS (Swift)AndroidReact Native

✓

This page includes the JavaScript below. Connection state: Connected

```
<!DOCTYPE html>
<head>
  <title>Pusher Test</title>
  <script src="https://js.pusher.com/3.2/pusher.min.js"></script>
  <script>

    // Enable pusher logging - don't include this in production
    Pusher.logToConsole = true;

    var pusher = new Pusher('29f96f0712df49870efd', {
      encrypted: true
    });

    var channel = pusher.subscribe('test_channel');
    channel.bind('my_event', function(data) {
      alert(data.message);
    });
```

2Add this to your server

CurlRubyRailsNode.jsASP .NET MVCPythonPHPGoJava.env

```
curl -H 'Content-Type: application/json' -d '{"data":{"message":"hello world"}}' https://api.pusherapp.com/apps/242073/events?body_md5=8a3501faef6636ca9a5ebbe6f31b5409&auth_version=1.0&auth_key=29f96f0712df49870efd&auth_timestamp=1472307177&auth_signature=71d0e382e0c9efec65fc8d7a4beab8f395b07889c871818cc1f5f
```

```
require 'pusher'

pusher_client = Pusher::Client.new(
  app_id: '242073',
  key: '29f96f0712df49870efd',
  secret: '5ec5490c74339a68b4ae',
  encrypted: true
)

pusher_client.trigger('test_channel', 'my_event', {
```