
TEAM RED FLOWERS · TEAM-4

RESUME ARCHITECTURE / PRODUCT DECK

ResuArchitect AI

Tailor the story.
Keep the evidence.

A local-first resume studio with deterministic job matching, reviewable AI suggestions, and clean document exports.

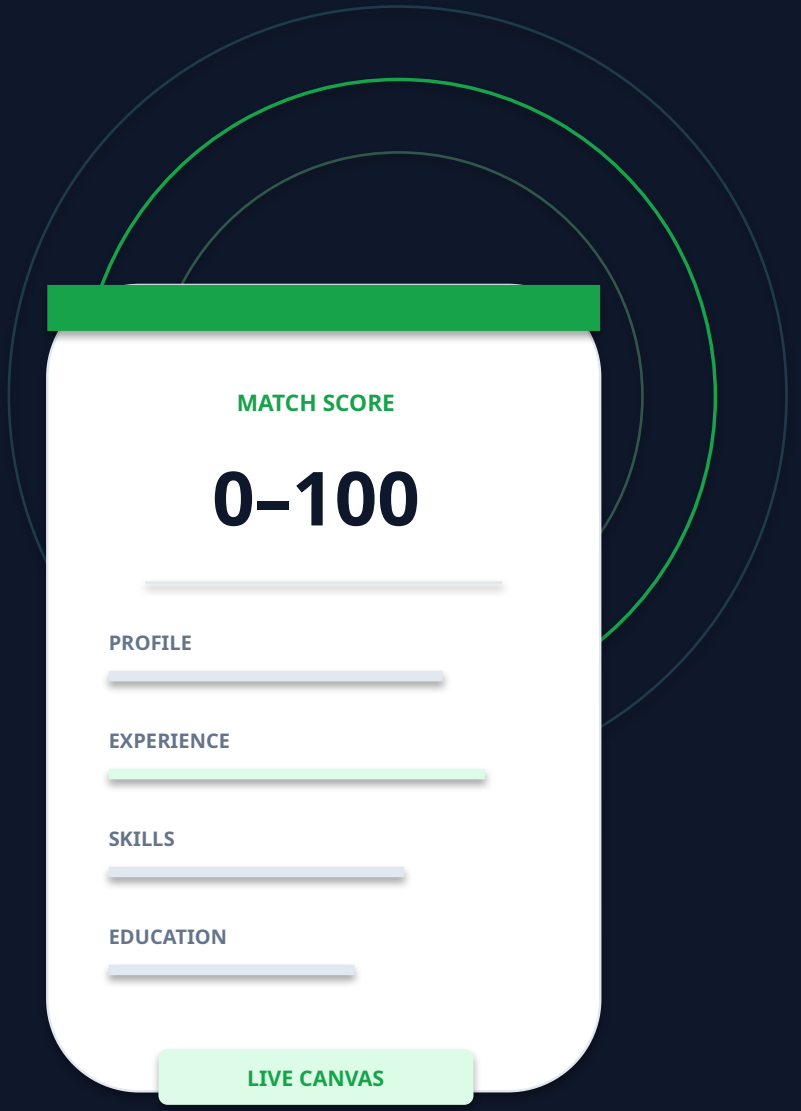

cbitosc/HFT26-TEAM-4

LOCAL BY DEFAULT · AI WHEN CHOSEN

One application means the same alignment work again.

The friction lives between the job description, the candidate's evidence, and the final file.

THE REPEATABLE WORK

01 **Read the JD**

Find required skills and role signals.

02 **Locate proof**


Trace each requirement to real experience.

03 **Rewrite carefully**

Make relevant evidence easy to scan.


04 **Check the file**

Keep structure clean for people and ATS.

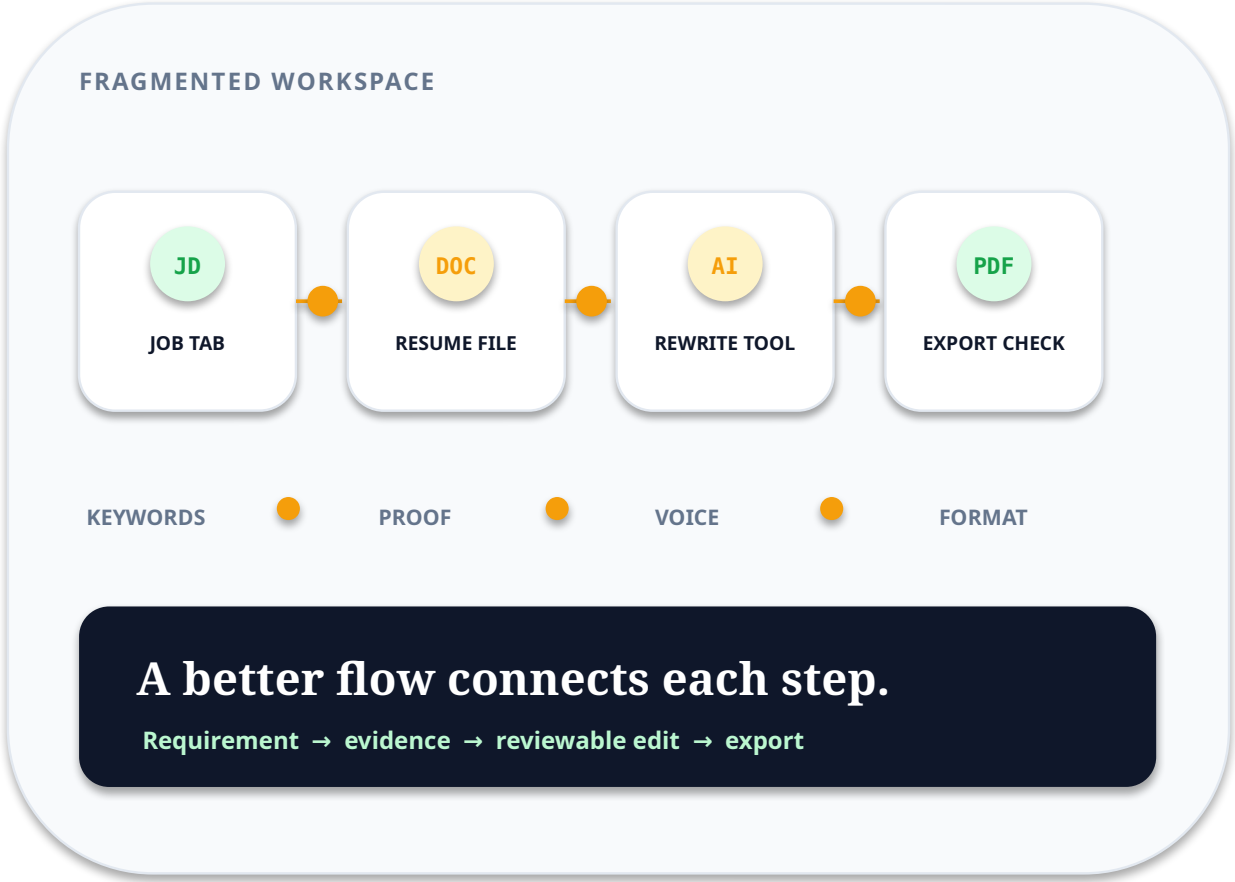

A browser-first core with an optional AI branch.

Scoring and editing stay local; the model is called only for tailored language suggestions.

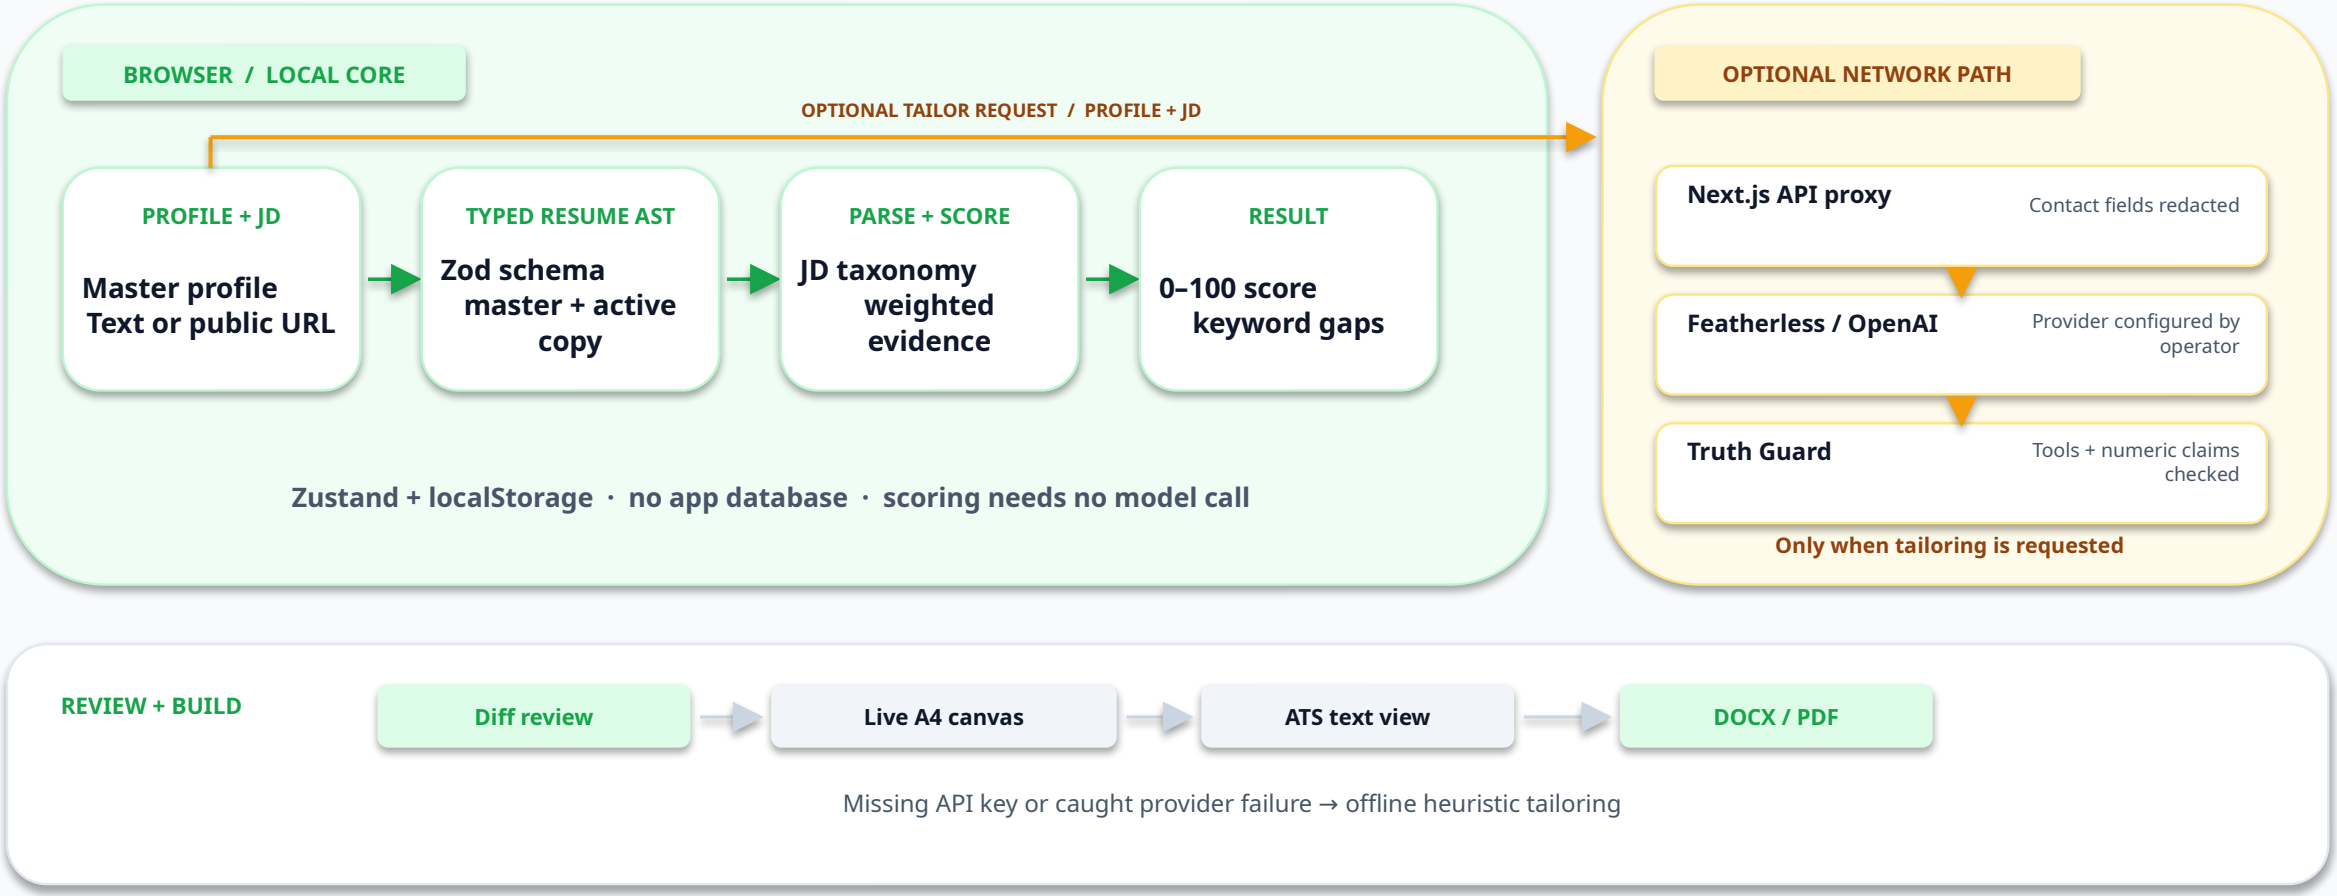

A job URL passes security checks before text extraction.

Pasted text goes straight to analysis; public URLs use a bounded server-side fetch path.

01 VALIDATE

HTTP(S) only · no URL credentials
Ports 80 / 443 / 8080 / 8443
Reject internal hosts and IP ranges

02 RESOLVE + PIN

Preflight DNS; reject private results
Pin the request to a validated IP
Recheck every redirect (up to 3)

03 BOUND FETCH

5-second total timeout
1 MB response cap
Protocol, host, and redirect checks

SAFE FETCH RESULT

Readable JD text

THREE-TIER EXTRACTOR / FIRST MATCHING SOURCE WINS

1. **Schema.org JSON-LD**
   JobPosting fields
2. **Next.js hydration**
   __NEXT_DATA__ props
3. **Semantic HTML**
   Clean + repair headings

HEADING + BULLET REPAIR → Readable JD text → Local taxonomy parser

SSRF CONTROLS

Evidence earns the score—not keyword presence alone.

The deterministic scorer returns a 0–100 match score and shows where each requirement is supported.

EVIDENCE WEIGHTING

Bullets + education highlights — 1.0×
full credit

Skills / tech / summary — 0.6×
partial credit

No profile evidence — 0.0×
no credit

Score = Σ(priority × evidence credit) ÷ Σ(priority) × 100

JD priority: must-have 3.0× · preferred 1.5× · general 1.0×

NORMALIZE THE WORDING

K8s → Kubernetes

Postgres → PostgreSQL

MATCH SCORE SCALE

0–100
score range

0 25 50 75 100

LOCAL SCORER / 5-KEYWORD FIXTURE

P50 / P95 · 0–1 ms axis

p50 0.28 ms

p95 0.43 ms

0 0.5 1.0 ms

100 warm-ups · 5,000 runs · Node v24.21

Sample max: 1.71 ms (<5 ms ref.); device/JD size vary.

500 SKILLS · 10 CATEGORIES

LONGEST SPAN WINS

Span overlap avoids double-counting compounds like Spring Boot.

MATCH SCORE
Local · deterministic

TAILORING
Optional · network model

Three bounded stages. Candidate approval stays in the loop.

Local parsing and code checks frame an optional language-model rewrite.

1 STAGE 1

Parse the JD

Local taxonomy parser
Canonical skills + priority tiers

2 STAGE 2

Google XYZ rewrite

Outcome · measure · method
Optional provider · 8s request bound

3 STAGE 3

Check the claims

Detected tools + numbers
Selected qualitative rules

CANDIDATE REVIEW

ACCEPT EDIT REJECT

Suggestions are reviewable diffs—not silent edits.


VALIDATION BOUNDARY

Rule checks can flag unsupported tools, number drift, selected claims, and bullets over 180 characters. Human review remains necessary.

No API key / caught provider failure → deterministic heuristic fallback

A working profile on the left. A live A4 canvas on the right.


Edit, reorder sections, change themes, inspect gaps, and review each proposed change in context.

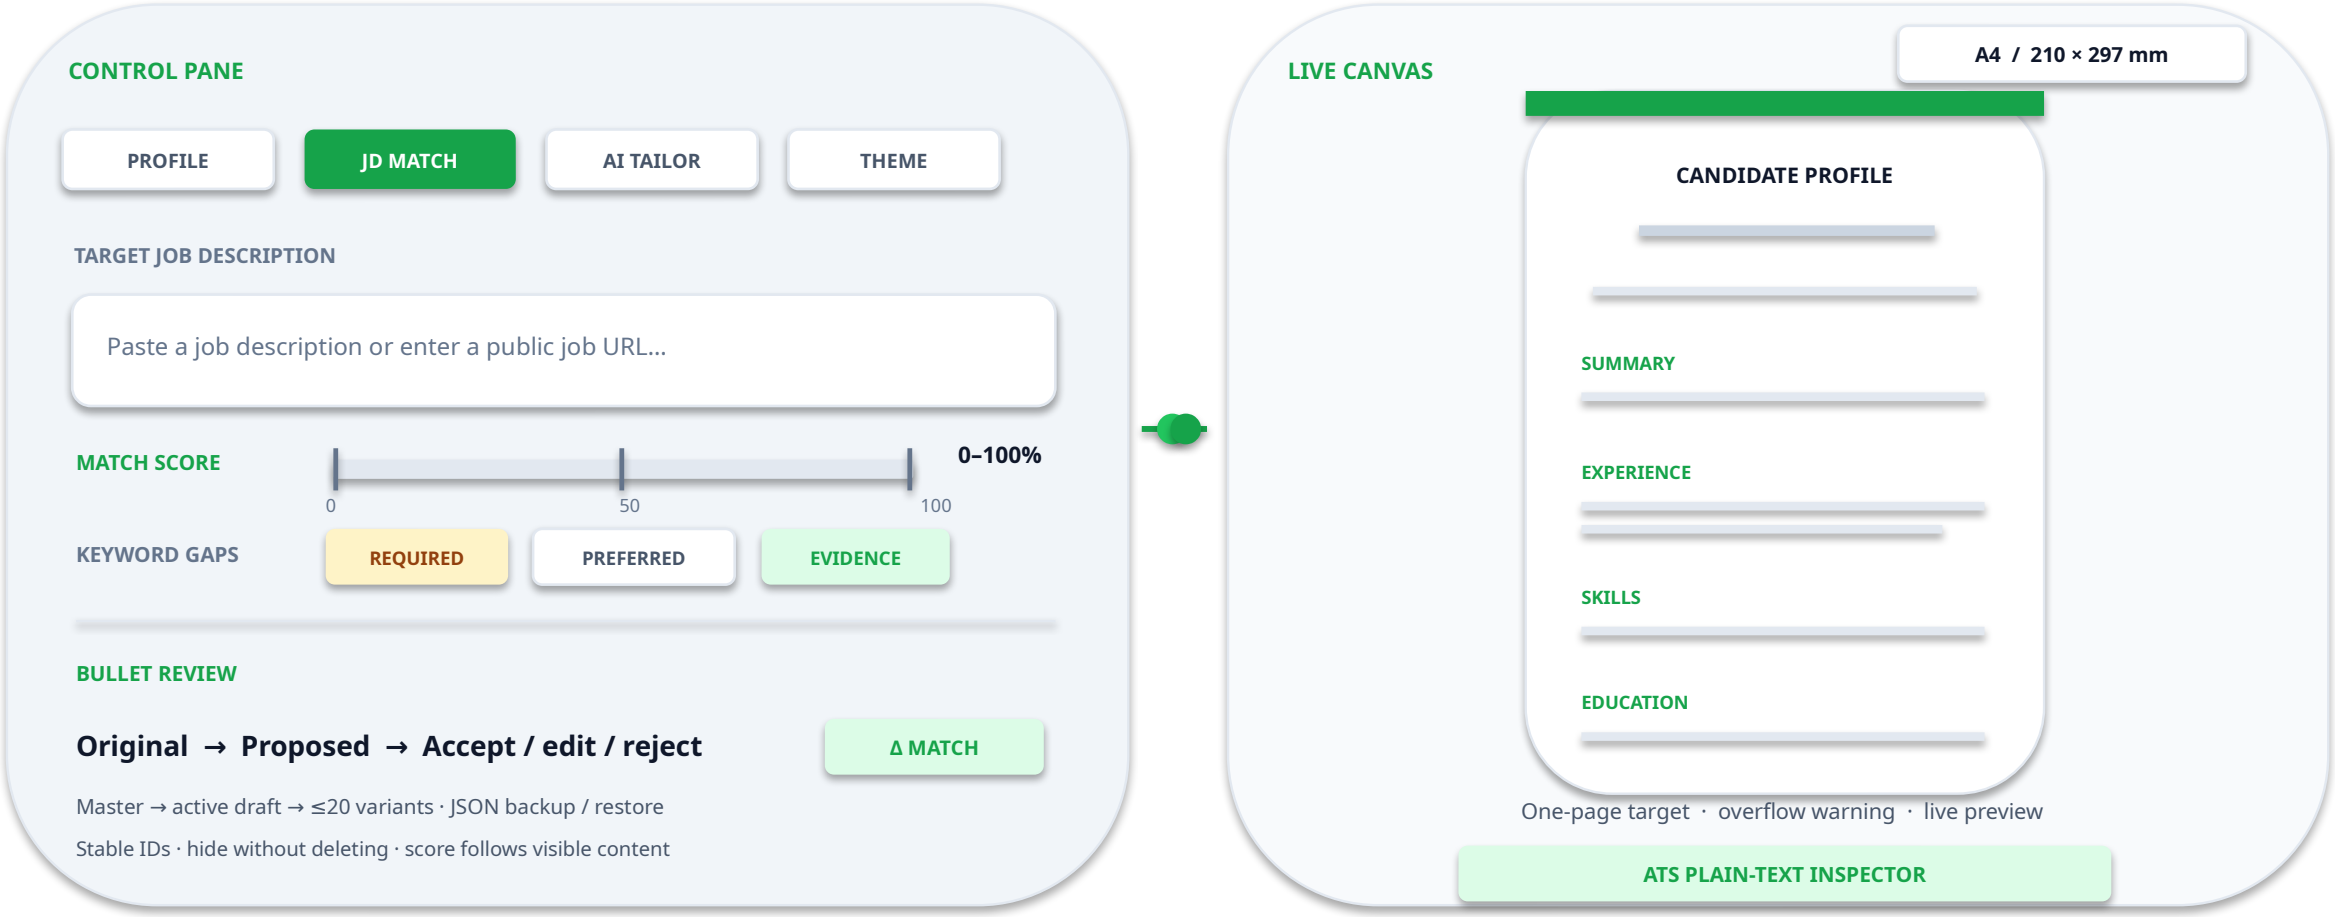

One document. Two ways to inspect it.

Review the human-facing page and the linearized text stream before downloading.

VISUAL RESUME

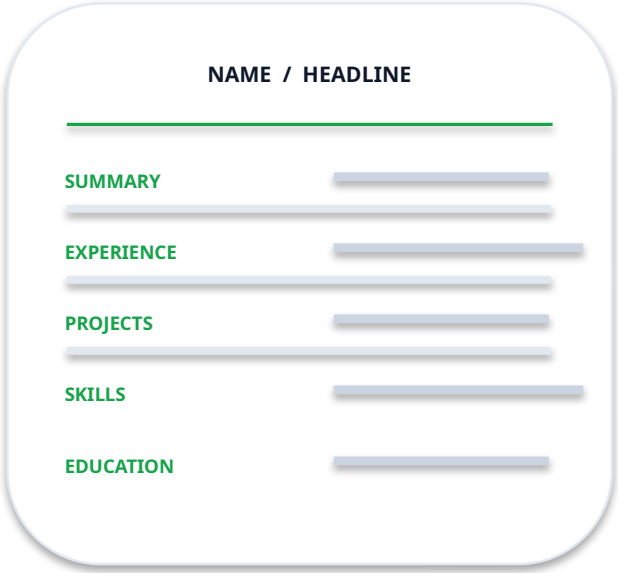

ATS ROBOT VIEW

```
PROFILE HEADER
  name · headline · contact

SECTION ORDER
  summary → experience → projects
  skills → education → certifications

TEXT FLOW
  headings · bullets · technologies
```

App-generated text order · not a third-party ATS certification.

.DOCX — OpenXML · Heading 1/2 · right tabs · native bullets

.PDF — jsPDF vector first · raster / print fallback · A4 pagination

Local by default. External AI is an explicit branch.

The browser owns the working profile; optional tailoring crosses a clearly bounded network boundary.

01 STORE

Browser localStorage

Resume state persists in the browser.
The app has no candidate database.

02 OPTIONAL CALL

Configured LLM provider

Contact fields are redacted in the proxy.
Resume content is still sent for tailoring.

03 RECOVER

Offline heuristic

No key or a caught provider failure
returns deterministic fallback suggestions.

AUTOMATED VERIFICATION

86 / 86

test cases passed

17 reported suite groups

npm test · 0 failures
Typecheck · lint clean

LOCAL-FIRST RESILIENCE

Local scoring

TypeScript

Local editing

Browser state

Fallback path

Heuristic engine

No-key or caught provider failure → local suggestion path

RESUARCHITECT AI

Tailor for the role. Keep the evidence.



Questions & discussion

TEAM RED FLOWERS · TEAM-4

cbitosc/HFT26-TEAM-4

LOCAL MATCHING / REVIEWABLE TAILORING / EDITABLE EXPORTS