



1. spring-rest-Handson Create a Spring Web Project using Maven

Project Structure

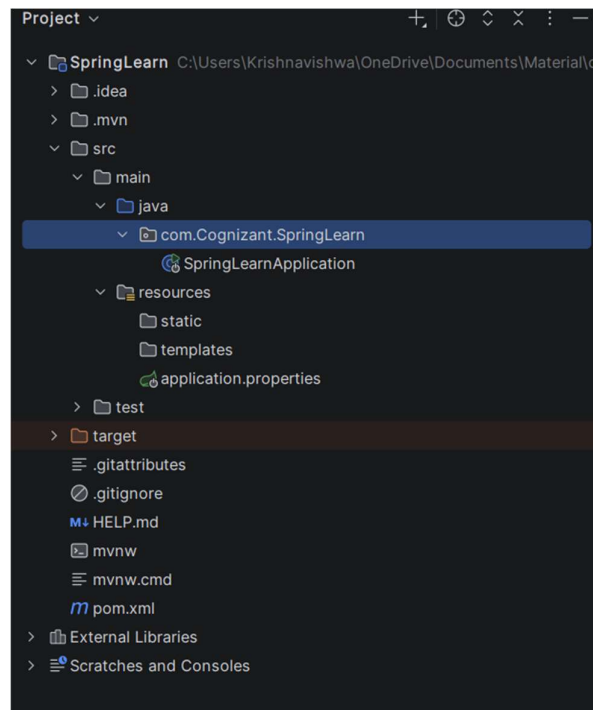

SpringLearnApplication.java / console:

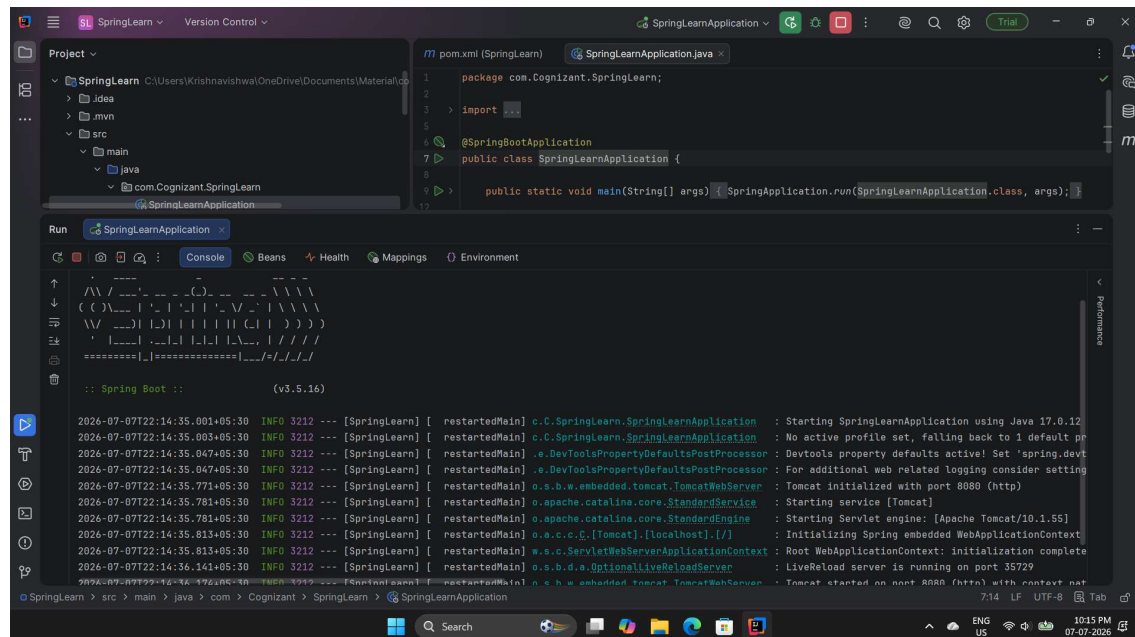

Country.java:

```
package com.Cognizant.SpringLearn;

import org.slf4j.Logger;
import org.slf4j.LoggerFactory;

class Country {

    private static final Logger LOGGER =
LoggerFactory.getLogger(Country.class);

    private String code;
    private String name;

    public Country() {
        LOGGER.debug("Inside Country Constructor.");
    }

    public String getCode() {
        LOGGER.debug("Inside getCode()");
        return code;
    }

    public void setCode(String code) {
        LOGGER.debug("Inside setCode()");
        this.code = code;
    }

    public String getName() {
        LOGGER.debug("Inside getName()");
        return name;
    }

    public void setName(String name) {
        LOGGER.debug("Inside setName()");
        this.name = name;
    }

    @Override
    public String toString() {
        return "Country[code=" + code + ", name=" + name + "];"
    }

}
```

Country.xml:

```
<?xml version="1.0" encoding="UTF-8"?>

<beans xmlns="http://www.springframework.org/schema/beans"
       xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"

       xsi:schemaLocation="
http://www.springframework.org/schema/beans
https://www.springframework.org/schema/beans/spring-beans.xsd">

    <bean id="country"
          class="com.Cognizant.SpringLearn.Country">

        <property name="code" value="IN"/>

        <property name="name" value="India"/>

    </bean>

</beans>
```

springLearnApplication:

```
package com.Cognizant.SpringLearn;

import org.slf4j.Logger;
import org.slf4j.LoggerFactory;

import org.springframework.boot.SpringApplication;
import org.springframework.boot.autoconfigure.SpringBootApplication;

import org.springframework.context.ApplicationContext;
import org.springframework.context.support.ClassPathXmlApplicationContext;

@SpringBootApplication
public class SpringLearnApplication {

    private static final Logger LOGGER =
        LoggerFactory.getLogger(SpringLearnApplication.class);

    public static void main(String[] args) {

        SpringApplication.run(SpringLearnApplication.class, args);

        displayCountry();

    }
    public static void displayCountry() {

        ApplicationContext context =
            new ClassPathXmlApplicationContext("country.xml");

        Country country =
            context.getBean("country", Country.class);

        LOGGER.debug("Country : {}", country);

    }

}
```

OUTPUT:

```
js  Environment
Processor : Devtools property defaults active! Set 'spring.devtools.add-properties' to 'false' to disable
Processor : For additional web related logging consider setting the 'logging.level.web' property to 'DEBUG'
Server    : Tomcat initialized with port 8080 (http)
Service   : Starting service [Tomcat]
Engine    : Starting Servlet engine: [Apache Tomcat/10.1.55]
Init      : Initializing Spring embedded WebApplicationContext
Context   : Root WebApplicationContext: initialization completed in 879 ms
LiveReload : LiveReload server is running on port 35729
Server    : Tomcat started on port 8080 (http) with context path '/'
Application : Started SpringLearnApplication in 1.676 seconds (process running for 2.225)
           : Inside Country Constructor.
           : Inside setCode()
           : Inside setName()
           : Country : Country [code=IN, name=India]
```