


2. spring-rest-Handson

Hello World RESTful Web Service

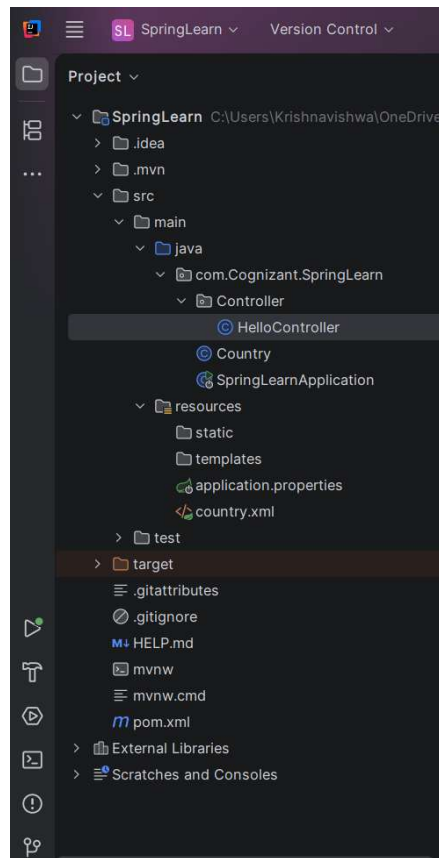

```

package com.Cognizant.SpringLearn;

import org.slf4j.Logger;
import org.slf4j.LoggerFactory;

import org.springframework.boot.SpringApplication;
import org.springframework.boot.autoconfigure.SpringBootApplication;

import org.springframework.context.ApplicationContext;
import org.springframework.context.support.ClassPathXmlApplicationContext;

@SpringBootApplication
public class SpringLearnApplication {

    private static final Logger LOGGER =
        LoggerFactory.getLogger(SpringLearnApplication.class);

    public static void main(String[] args) {

        SpringApplication.run(SpringLearnApplication.class, args);

        displayCountry();

    }

    public static void displayCountry() {

        ApplicationContext context =
            new ClassPathXmlApplicationContext("country.xml");

        Country country =
            context.getBean("country", Country.class);

        LOGGER.debug("Country : {}", country);

    }

}

```

The screenshot shows a web browser window with the address bar displaying 'localhost:8083/hello'. The page content is 'Hello World!!'. The Chrome DevTools interface is open, with the 'Network' tab selected. The network log shows a single request named 'hello' with a status of 200, type of document, and a size of 174 B. The time taken for the request is 145 ms. The console is empty.

Name	Status	Type	Initiator	Size	Time	Fulfilled by
hello	200	document	Other	174 B	145 ms	

1 requests 174 B transferred 13 B resources Finish: 145 ms DOMContentLoaded: 160 ms Load: 161 ms

Console Issues

GET http://localhost:8083/hello + ...

http://localhost:8083/hello Save

GET http://localhost:8083/hello Send

Params Authorization Headers (6) Body Pre-request Script Tests Settings Cookies

Query Params

Key	Value	Bulk Edit
Key	Value	

Body Cookies Headers (5) Test Results Status: 200 OK Time: 23 ms Size: 177 B Save Response

Pretty Raw Preview Visualize Text

```
1 Hello World!!
```

Run SpringLearnApplication

Console Beans Health Mappings Environment

```
ngLearn [ restartedMain] c.C.SpringLearn.SpringLearnApplication : Starting SpringLearnApplication using Java 17.0.12 with PID 22112 (C:\Users\Krishnavishwa\OneDrive\
ngLearn [ restartedMain] c.C.SpringLearn.SpringLearnApplication : Running with Spring Boot v3.5.16, Spring v6.2.19
ngLearn [ restartedMain] c.C.SpringLearn.SpringLearnApplication : No active profile set, falling back to 1 default profile: "default"
ngLearn [ restartedMain] .e.DevToolsPropertyDefaultsPostProcessor : Devtools property defaults active! Set 'spring.devtools.add-properties' to 'false' to disable
ngLearn [ restartedMain] .e.DevToolsPropertyDefaultsPostProcessor : For additional web related logging consider setting the 'logging.level.web' property to 'DEBUG'
ngLearn [ restartedMain] o.s.b.w.embedded.tomcat.TomcatWebServer : Starting service [Tomcat]
ngLearn [ restartedMain] o.apache.catalina.core.StandardService : Starting Servlet engine: [Apache Tomcat/10.1.55]
ngLearn [ restartedMain] o.a.c.c.C.[Tomcat].[localhost].[/] : Initializing Spring embedded WebApplicationContext
ngLearn [ restartedMain] w.s.c.ServletWebServerApplicationContext : Root WebApplicationContext: Initialization completed in 701 ms
ngLearn [ restartedMain] o.s.b.d.a.OptionalLiveReloadServer : LiveReload server is running on port 35729
ngLearn [ restartedMain] o.s.b.w.embedded.tomcat.TomcatWebServer : Tomcat started on port 8083 (http) with context path '/'
ngLearn [ restartedMain] c.C.SpringLearn.SpringLearnApplication : Started SpringLearnApplication in 1.361 seconds (process running for 1.834)
```

```
package com.Cognizant.SpringLearn;

public class Country {

    private String code;
    private String name;

    public Country() {
    }

    public String getCode() {
        return code;
    }

    public void setCode(String code) {
        this.code = code;
    }

    public String getName() {
        return name;
    }

    public void setName(String name) {
        this.name = name;
    }
}
```

```
package com.Cognizant.SpringLearn.Controller;

import com.Cognizant.SpringLearn.Country;
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;

import org.springframework.context.ApplicationContext;
import org.springframework.context.support.ClassPathXmlApplicationContext;

import org.springframework.web.bind.annotation.RequestMapping;
import org.springframework.web.bind.annotation.RestController;

@RestController
public class CountryController {

    private static final Logger LOGGER =
        LoggerFactory.getLogger(CountryController.class);

    @RequestMapping("/country")
    public Country getCountryIndia() {

        LOGGER.info("START");

        ApplicationContext context =
            new ClassPathXmlApplicationContext("country.xml");

        Country country =
```


```

        context.getBean("country", Country.class);

        LOGGER.info("END");

        return country;
    }
}

```

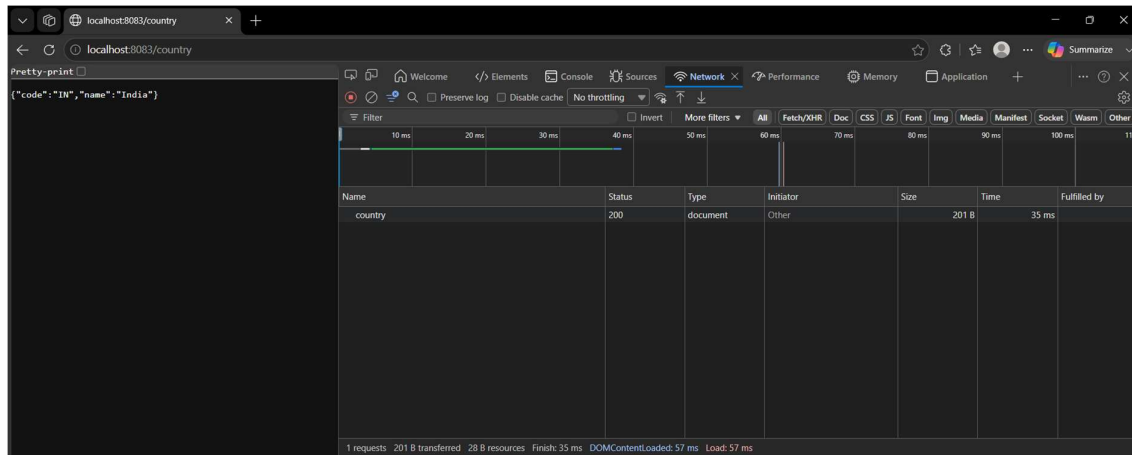


Post Man:

```

{
  "code": "IN",
  "name": "India"
}

```

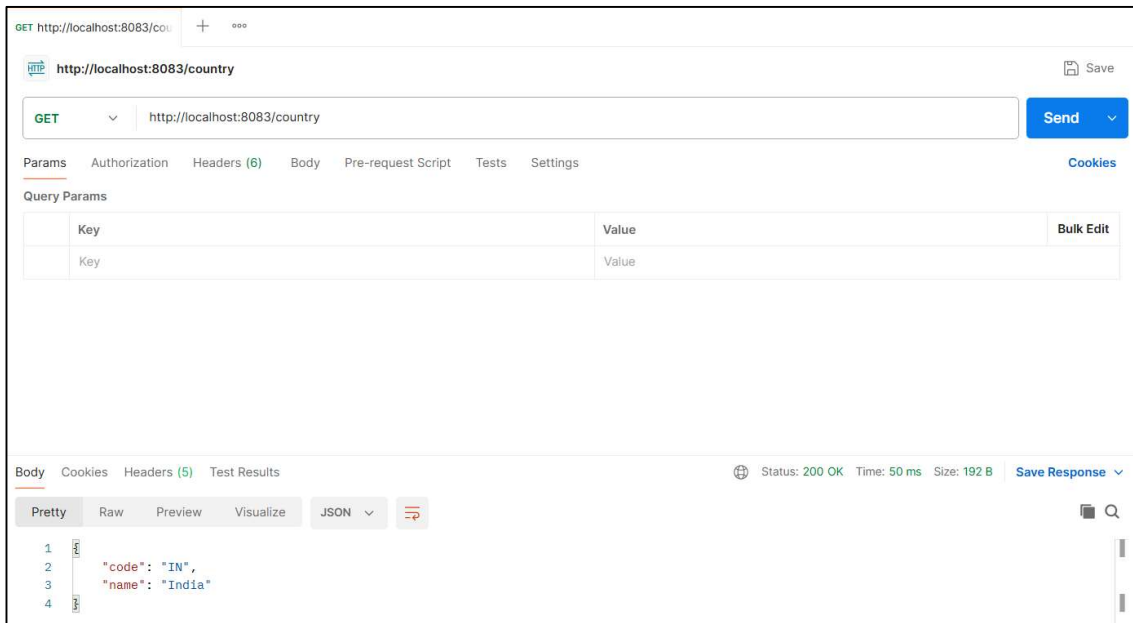

2. spring-rest-handson REST - Get country based on country code

CountryService.java:

```
package com.Cognizant.SpringLearn.service;

import com.Cognizant.SpringLearn.Country;
import org.springframework.context.ApplicationContext;
import org.springframework.context.support.ClassPathXmlApplicationContext;
import org.springframework.stereotype.Service;

import java.util.List;

@Service
public class CountryService {

    public Country getCountry(String code) {

        ApplicationContext context =
            new ClassPathXmlApplicationContext("country.xml");

        List<Country> countries =
            context.getBean("countryList", List.class);

        for (Country country : countries) {

            if (country.getCode().equalsIgnoreCase(code)) {
                return country;
            }

        }

        return null;
    }
}
```

Country.java:

```
package com.Cognizant.SpringLearn.Controller;

import com.Cognizant.SpringLearn.Country;
import com.Cognizant.SpringLearn.service.CountryService;

import org.springframework.beans.factory.annotation.Autowired;
import org.springframework.web.bind.annotation.GetMapping;
import org.springframework.web.bind.annotation.PathVariable;
import org.springframework.web.bind.annotation.RestController;

@RestController
public class CountryController {

    @Autowired
    private CountryService countryService;

    @GetMapping("/countries/{code}")
    public Country getCountry(@PathVariable String code){

        return countryService.getCountry(code);
    }

}
```

Console:

```
Run SpringLearnApplication x
Console Beans Health Mappings Environment

[Main] c.C.SpringLearn.SpringLearnApplication : Starting SpringLearnApplication using Java 17.0.12 with PID 11712 (C:\Users\Krishnavishwa\OneDri
[Main] c.C.SpringLearn.SpringLearnApplication : Running with Spring Boot v3.5.16, Spring v6.2.19
[Main] c.C.SpringLearn.SpringLearnApplication : No active profile set, falling back to 1 default profile: "default"
[Main] .e.DevToolsPropertyDefaultsPostProcessor : Devtools property defaults active! Set 'spring.devtools.add-properties' to 'false' to disable
[Main] .e.DevToolsPropertyDefaultsPostProcessor : For additional web related logging consider setting the 'logging.level.web' property to 'DEBUG'
[Main] o.s.b.w.embedded.tomcat.TomcatWebServer : Tomcat initialized with port 8083 (http)
[Main] o.apache.catalina.core.StandardService : Starting service [Tomcat]
[Main] o.apache.catalina.core.StandardEngine : Starting Servlet engine: [Apache Tomcat/10.1.55]
[Main] o.a.c.c.Ç.[Tomcat].[localhost].[/] : Initializing Spring embedded WebApplicationContext
[Main] w.s.c.ServletWebServerApplicationContext : Root WebApplicationContext: initialization completed in 1286 ms
[Main] o.s.b.d.a.OptionalLiveReloadServer : LiveReload server is running on port 35729
[Main] o.s.b.w.embedded.tomcat.TomcatWebServer : Tomcat started on port 8083 (http) with context path '/'
[Main] c.C.SpringLearn.SpringLearnApplication : Started SpringLearnApplication in 2.343 seconds (process running for 3.07)
[Main] c.C.SpringLearn.SpringLearnApplication : SpringLearn Application Started
```

PostMan:

GET http://localhost:8083/cou

+

...

http://localhost:8083/countries/jp

GET

http://localhost:8083/countries/jp

Params

Authorization

Headers (6)

Body

Pre-request Script

Tests

Settings

Query Params

Key	Value
Key	Value

Body

Cookies

Headers (5)

Test Results

Pretty

Raw

Preview

Visualize

JSON

...

1

2


3

4


"code": "JP",

"name": "Japan"

<http://localhost:8083/countries/>:

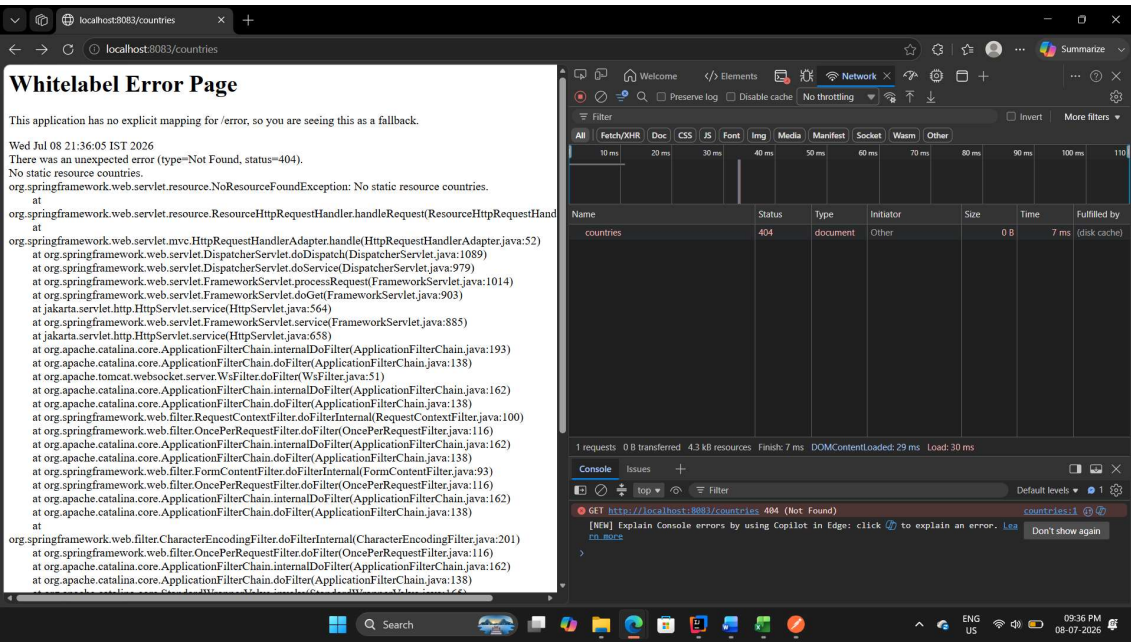

<http://localhost:8083/countries/US>:

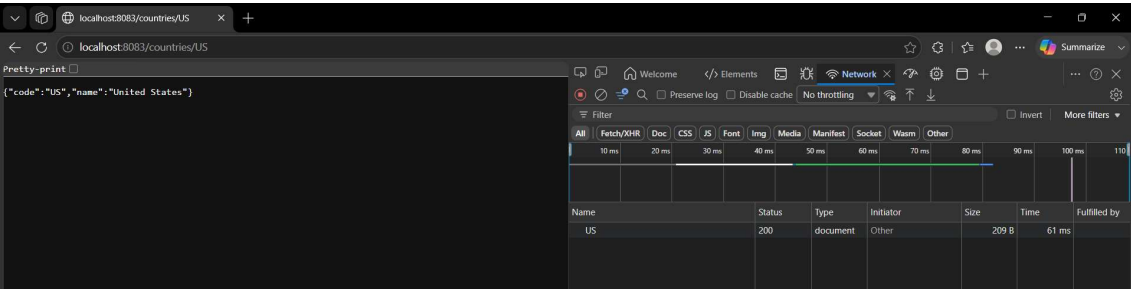

<http://localhost:8083/countries/up>: here its was not mentioned object name

