

computer science

pandas

<https://pandas.pydata.org/pandas-docs/stable/index.html>

pandas for data (science)

- **syntax errors**: raised while the interpreter while executing the program reaches an instruction that does not match syntax rules (the first time the instruction is executed)
- unexpected behavior (**exceptions**): raised while the interpreter executes the program, due to a situation (data) not taken into account while writing the program



dataframes

- The primary pandas data
- Two-dimensional, size-mutable, potentially heterogeneous tabular data.
- Data structure also contains labeled axes (rows and columns).
- Arithmetic operations align on both row and column labels.
- Can be thought of as a dictionary-like container for Series objects.



dataframes 2

- tidy data
 - each **variable** is saved in its own **column**
 - each **observation** is saved in its own **row**

... might seem not to compat ... easy to manipulate



dataframes 3

- generic way to store information

it is necessary to identify
classifying elements & values
elements:

- n
- type of test: TTT/OTD
- alpha: 0.05. 0.01

Critical Values of the Wilcoxon Signed Ranks Test

n	Two-Tailed Test		One-Tailed Test	
	$\alpha = .05$	$\alpha = .01$	$\alpha = .05$	$\alpha = .01$
5	--	--	0	--
6	0	--	2	--
7	2	--	3	0
8	3	0	5	1
9	5	1	8	3
10	8	3	10	5
11	10	5	13	7
12	13	7	17	9
13	17	9	21	12
14	21	12	25	15
15	25	15	30	19
16	29	19	35	23
17	34	23	41	27

dataframes 4

- reorganize information ...



```
n,type,alpha,value
5,TTT,0.05,NaN
5,TTT,0.01,NaN
5,OTT,0.05,0
5,OTT,0.01,NaN
6,TTT,0.05,0
6,TTT,0.01,NaN
6,OTT,0.05,2
6,OTT,0.01,NaN
7,TTT,0.05,2
7,TTT,0.01,NaN
7,OTT,0.05,3
7,OTT,0.01,0
8,TTT,0.05,3
8,TTT,0.01,0
8,OTT,0.05,5
8,OTT,0.01,1
```



```
n,TTT05,TTT01,OTT05,OTT01
5,NaN,NaN,0,NaN
6,0,NaN,2,NaN
7,2,NaN,3,0
8,3,0,5,1
9,5,1,8,3
10,8,3,10,5
11,10,5,13,7
12,13,7,17,9
13,17,9,21,12
```

get data from csv file

`read_csv(csvfilename):` returns a dataframe from with the data from the csvfilename

`df = pd.read_csv("SBP.csv")`



```
SBP_before,SBP_after
125,118
132,134
138,130
120,124
125,105
127,130
136,130
139,132
131,123
132,128
135,126
136,140
128,135
127,126
130,132
```



	SBP_before	SBP_after
0	125	118
1	132	134
2	138	130
3	120	124
4	125	105
5	127	130
6	136	130
7	139	132
8	131	123
9	132	128
10	135	126
11	136	140
12	128	135
13	127	126
14	130	132

`len(df)`

returns the number of row in the dataframe

handling missing data

`fillna(_value_)`

```
[>>> df=df.fillna(0.0)
```

```
[>>> df
```

	SBP_before	SBP_after
0	125	118.0
1	132	134.0
2	138	130.0
3	120	124.0
4	125	105.0
5	127	130.0
6	136	130.0
7	139	132.0
8	131	123.0
9	132	128.0
10	135	126.0
11	136	140.0
12	128	135.0
13	127	126.0
14	130	132.0
15	134	0.0



replace NaN with a value

	SBP_before	SBP_after
0	125	118.0
1	132	134.0
2	138	130.0
3	120	124.0
4	125	105.0
5	127	130.0
6	136	130.0
7	139	132.0
8	131	123.0
9	132	128.0
10	135	126.0
11	136	140.0
12	128	135.0
13	127	126.0
14	130	132.0
15	134	NaN

`dropna()`

```
[>>> df = df.dropna()
```

```
[>>> df
```

	SBP_before	SBP_after
0	125	118.0
1	132	134.0
2	138	130.0
3	120	124.0
4	125	105.0
5	127	130.0
6	136	130.0
7	139	132.0
8	131	123.0
9	132	128.0
10	135	126.0
11	136	140.0
12	128	135.0
13	127	126.0
14	130	132.0

remove when incomplete →

selecting rows (subset observation)

- by position

`df.iloc[fromrow:torow]`

```
[>>> dfw.iloc[1:5]
      n type  alpha  value
1    5  TTT   0.01   NaN
2    5  OTT   0.05    0.0
3    5  OTT   0.01   NaN
4    6  TTT   0.05    0.0
```

```
[>>> dfw = pd.read_csv("../WSRTdf.csv")
[>>> dfw
```

	n	type	alpha	value
0	5	TTT	0.05	NaN
1	5	TTT	0.01	NaN
2	5	OTT	0.05	0.0
3	5	OTT	0.01	NaN
4	6	TTT	0.05	0.0

..
99	29	OTT	0.01	110.0
100	30	TTT	0.05	137.0
101	30	TTT	0.01	109.0
102	30	OTT	0.05	151.0
103	30	OTT	0.01	120.0

```
[104 rows x 4 columns]
```

selecting rows (subset observation) 2

- by value in one ...

`df[(df[colname] == val)]`

```
[>>> dfw[(dfw['alpha'] == ALPHA05)]
```

	n	type	alpha	value
0	5	TTT	0.05	NaN
2	5	OTT	0.05	0.0
4	6	TTT	0.05	0.0
6	6	OTT	0.05	2.0
8	7	TTT	0.05	2.0
10	7	OTT	0.05	3.0
12	8	TTT	0.05	3.0
14	8	OTT	0.05	5.0
16	9	TTT	0.05	5.0
18	9	OTT	0.05	8.0

```
[>>> dfw = pd.read_csv("../WSRTdf.csv")
```

```
[>>> dfw
```

	n	type	alpha	value
0	5	TTT	0.05	NaN
1	5	TTT	0.01	NaN
2	5	OTT	0.05	0.0
3	5	OTT	0.01	NaN
4	6	TTT	0.05	0.0
..
99	29	OTT	0.01	110.0
100	30	TTT	0.05	137.0
101	30	TTT	0.01	109.0
102	30	OTT	0.05	151.0
103	30	OTT	0.01	120.0

```
[104 rows x 4 columns]
```

selecting rows (subset observation) 3

... or more columns

`df[(df[colname] == val)
& df[colname2] == val2]`

```
[>>> dfw[(dfw['alpha'] == ALPHA05) &  
[...      (dfw['type'] == TWOTAILED)]
```

	n	type	alpha	value
0	5	TTT	0.05	NaN
4	6	TTT	0.05	0.0
8	7	TTT	0.05	2.0
12	8	TTT	0.05	3.0
16	9	TTT	0.05	5.0
20	10	TTT	0.05	8.0
24	11	TTT	0.05	10.0
28	12	TTT	0.05	13.0
32	13	TTT	0.05	17.0

```
[>>> dfw = pd.read_csv("../WSRTdf.csv")
```

```
[>>> dfw
```

	n	type	alpha	value
0	5	TTT	0.05	NaN
1	5	TTT	0.01	NaN
2	5	OTT	0.05	0.0
3	5	OTT	0.01	NaN
4	6	TTT	0.05	0.0

..
99	29	OTT	0.01	110.0
100	30	TTT	0.05	137.0
101	30	TTT	0.01	109.0
102	30	OTT	0.05	151.0
103	30	OTT	0.01	120.0

```
[104 rows x 4 columns]
```

selecting values

select row within the dataframe by using index

```
[>>> df.iloc[0]
SBP_before    127.0
SBP_after     126.0
Difference      1.0
AbsDiff       1.0
Ranks         1.0
R+            1.0
Name: 13, dtype: float64
```



```
[>>> df.iloc[2]
SBP_before    130.0
SBP_after     132.0
Difference     -2.0
AbsDiff       2.0
Ranks         2.5
R+            0.0
Name: 14, dtype: float64
```



	SBP_before	SBP_after	Difference	AbsDiff	Ranks	R+
13	127	126	1	1	1.0	1.0
1	132	134	-2	2	2.5	0.0
14	130	132	-2	2	2.5	0.0
5	127	130	-3	3	4.0	0.0
3	120	124	-4	4	6.0	0.0
11	136	140	-4	4	6.0	0.0
9	132	128	4	4	6.0	6.0
6	136	130	6	6	8.0	8.0
12	128	135	-7	7	10.0	0.0
0	125	118	7	7	10.0	10.0
7	139	132	7	7	10.0	10.0
2	138	130	8	8	12.5	12.5
8	131	123	8	8	12.5	12.5
10	135	126	9	9	14.0	14.0
4	125	105	20	20	15.0	15.0

selecting values 2

1. specify row and column
uncommon, based on a position ...

```
[>>> df.iloc[2].SBP_after  
132.0  
[>>> df.SBP_after.iloc[2]  
132
```

row, column

```
[>>> df.iloc[2,1]  
132
```

		0	1	2.			
		SBP_before	SBP_after	Difference	AbsDiff	Ranks	R+
0	13	127	126	1	1	1.0	1.0
1	1	132	134	-2	2	2.5	0.0
2	14	130	132	-2	2	2.5	0.0
...	5	127	130	-3	3	4.0	0.0
	3	120	124	-4	4	6.0	0.0
	11	136	140	-4	4	6.0	0.0
	9	132	128	4	4	6.0	6.0
	6	136	130	6	6	8.0	8.0
	12	128	135	-7	7	10.0	0.0
	0	125	118	7	7	10.0	10.0
	7	139	132	7	7	10.0	10.0
	2	138	130	8	8	12.5	12.5
	8	131	123	8	8	12.5	12.5
	10	135	126	9	9	14.0	14.0
	4	125	105	20	20	15.0	15.0

selecting values 3

unless we have a selected row ... and we want a value

```
[>>> dfw[(dfw['type'] == TWOTAILED) & (dfw['alpha'] == ALPHA05) & (dfw['n'] == number_of_samples)]
```

	n	type	alpha	value
40	15	TTT	0.05	25.0

this column



```
[>>> dfw[(dfw['type'] == TWOTAILED) & (dfw['alpha'] == ALPHA05) & (dfw['n'] == number_of_samples)][['value']].iloc[0]
```


25.0

there is
only one row



creating new data

`df['NewColumnName'] = df.ExistingColumn` *operator* variable

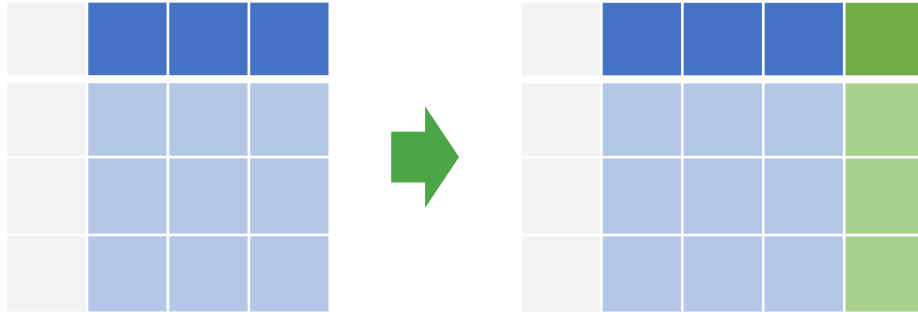

```
[>>> df['Difference'] = df.SBP_before - df.SBP_after  
[>>> df  
      SBP_before  SBP_after  Difference  
0             125         118          7  
1             132         134         -2  
2             138         130          8  
3             120         124         -4  
4             125         105         20  
5             127         130         -3  
6             136         130          6  
7             139         132          7  
8             131         123          8  
9             132         128          4  
10            135         126          9  
11            136         140         -4  
12            128         135         -7  
13            127         126          1  
14            130         132         -2
```

`df['Difference'] = df.SBP_before - df.SBP_after`

creating new data 2

`df['NewColumnName'] = df.ExistingColumn operator variable`

`df['AbsDiff'] = abs(df.Difference)`

```
[>>> df['AbsDiff'] = abs(df.Difference)
```

```
[>>> df
```

	SBP_before	SBP_after	Difference	AbsDiff
0	125	118	7	7
1	132	134	-2	2
2	138	130	8	8
3	120	124	-4	4
4	125	105	20	20
5	127	130	-3	3
6	136	130	6	6
7	139	132	7	7
8	131	123	8	8
9	132	128	4	4
10	135	126	9	9
11	136	140	-4	4
12	128	135	-7	7
13	127	126	1	1
14	130	132	-2	2



creating new data, selectively

```
df['R+'] = df['Ranks']*(df['Difference'] > 0)
```

1 when true
0 when false

```
[>>> df['R+'] = df['Ranks']*(df['Difference'] > 0)
```

```
[>>> df
```

	SBP_before	SBP_after	Difference	AbsDiff	Ranks	R+
13	127	126	1	1	1.0	1.0
1	132	134	-2	2	2.5	0.0
14	130	132	-2	2	2.5	0.0
5	127	130	-3	3	4.0	0.0
3	120	124	-4	4	6.0	0.0
11	136	140	-4	4	6.0	0.0
9	132	128	4	4	6.0	6.0
6	136	130	6	6	8.0	8.0
12	128	135	-7	7	10.0	0.0
0	125	118	7	7	10.0	10.0
7	139	132	7	7	10.0	10.0
2	138	130	8	8	12.5	12.5
8	131	123	8	8	12.5	12.5
10	135	126	9	9	14.0	14.0
4	125	105	20	20	15.0	15.0

sorting

list of columns



`sort_values(by, ascending):` sorts with respect to values in columns, in ascending (default) or descending order

it is not "in place"

```
df = df.sort_values("AbsDiff")
```



sorting 2

```
df = df.sort_values("AbsDiff")
```

```
[>>> df = df.sort_values("AbsDiff")
[>>> df
```

	SBP_before	SBP_after	Difference	AbsDiff
13	127	126	1	1
1	132	134	-2	2
14	130	132	-2	2
5	127	130	-3	3
3	120	124	-4	4
9	132	128	4	4
11	136	140	-4	4
6	136	130	6	6
0	125	118	7	7
7	139	132	7	7
12	128	135	-7	7
2	138	130	8	8
8	131	123	8	8
10	135	126	9	9
4	125	105	20	20

```
[>>> df = df.sort_values("Difference")
[>>> df
```

	SBP_before	SBP_after	Difference	AbsDiff
12	128	135	-7	7
3	120	124	-4	4
11	136	140	-4	4
5	127	130	-3	3
1	132	134	-2	2
14	130	132	-2	2
13	127	126	1	1
9	132	128	4	4
6	136	130	6	6
0	125	118	7	7
7	139	132	7	7
2	138	130	8	8
8	131	123	8	8
10	135	126	9	9
4	125	105	20	20

```
df = df.sort_values("Difference")
```

sorting 3

sort by this then by this



```
df = df.sort_values(["AbsDiff", "Difference"])
```

```
[>>> df = df.sort_values(["AbsDiff", "Difference"])
```

```
[>>> df
```

	SBP_before	SBP_after	Difference	AbsDiff
13	127	126	1	1
1	132	134	-2	2
14	130	132	-2	2
5	127	130	-3	3
3	120	124	-4	4
11	136	140	-4	4
9	132	128	4	4
6	136	130	6	6
12	128	135	-7	7
0	125	118	7	7
7	139	132	7	7
2	138	130	8	8
8	131	123	8	8
10	135	126	9	9
4	125	105	20	20

group of data / aggregation

groupby(colnames).aggr()

```
[>>> df.groupby('AbsDiff').size()
```

AbsDiff

1 1

2 2

3 1

4 3

6 1

7 3

8 2

9 1

20 1

dtype: int64

```
[>>> df
```

	SBP_before	SBP_after	Difference	AbsDiff	Ranks	R+
--	------------	-----------	------------	---------	-------	----

13	127	126	1	1	1.0	1.0
----	-----	-----	---	---	-----	-----

1	132	134	-2	2	2.5	0.0
---	-----	-----	----	---	-----	-----

14	130	132	-2	2	2.5	0.0
----	-----	-----	----	---	-----	-----

5	127	130	-3	3	4.0	0.0
---	-----	-----	----	---	-----	-----

3	120	124	-4	4	6.0	0.0
---	-----	-----	----	---	-----	-----

11	136	140	-4	4	6.0	0.0
----	-----	-----	----	---	-----	-----

9	132	128	4	4	6.0	6.0
---	-----	-----	---	---	-----	-----

6	136	130	6	6	8.0	8.0
---	-----	-----	---	---	-----	-----

12	128	135	-7	7	10.0	0.0
----	-----	-----	----	---	------	-----

0	125	118	7	7	10.0	10.0
---	-----	-----	---	---	------	------

7	139	132	7	7	10.0	10.0
---	-----	-----	---	---	------	------

2	138	130	8	8	12.5	12.5
---	-----	-----	---	---	------	------

8	131	123	8	8	12.5	12.5
---	-----	-----	---	---	------	------

10	135	126	9	9	14.0	14.0
----	-----	-----	---	---	------	------

4	125	105	20	20	15.0	15.0
---	-----	-----	----	----	------	------

group of data / aggregation 2

`groupby(colnames).aggr()`

```
[>>> df.groupby('AbsDiff')[['SBP_before', 'SBP_after']].mean()
```

	SBP_before	SBP_after
AbsDiff		
1	127.000000	126.000000
2	131.000000	133.000000
3	127.000000	130.000000
4	129.333333	130.666667
6	136.000000	130.000000
7	130.666667	128.333333
8	134.500000	126.500000
9	135.000000	126.000000
20	125.000000	105.000000

```
[>>> df
```

	SBP_before	SBP_after	Difference	AbsDiff	Ranks	R+
13	127	126	1	1	1.0	1.0
1	132	134	-2	2	2.5	0.0
14	130	132	-2	2	2.5	0.0
5	127	130	-3	3	4.0	0.0
3	120	124	-4	4	6.0	0.0
11	136	140	-4	4	6.0	0.0
9	132	128	4	4	6.0	6.0
6	136	130	6	6	8.0	8.0
12	128	135	-7	7	10.0	0.0
0	125	118	7	7	10.0	10.0
7	139	132	7	7	10.0	10.0
2	138	130	8	8	12.5	12.5
8	131	123	8	8	12.5	12.5
10	135	126	9	9	14.0	14.0
4	125	105	20	20	15.0	15.0

group of data / aggregation 3

groupby(colnames).aggr()

```
[>>> df.groupby('AbsDiff')[['SBP_before', 'SBP_after']].describe()
```

	SBP_before									SBP_after							
AbsDiff	count	mean	std	min	25%	50%	75%	max		count	mean	std	min	25%	50%	75%	max
1	1.0	127.000000	NaN	127.0	127.00	127.0	127.00	127.0		1.0	126.000000	NaN	126.0	126.00	126.0	126.00	126.0
2	2.0	131.000000	1.414214	130.0	130.50	131.0	131.50	132.0		2.0	133.000000	1.414214	132.0	132.50	133.0	133.50	134.0
3	1.0	127.000000	NaN	127.0	127.00	127.0	127.00	127.0		1.0	130.000000	NaN	130.0	130.00	130.0	130.00	130.0
4	3.0	129.333333	8.326664	120.0	126.00	132.0	134.00	136.0		3.0	130.666667	8.326664	124.0	126.00	128.0	134.00	140.0
6	1.0	136.000000	NaN	136.0	136.00	136.0	136.00	136.0		1.0	130.000000	NaN	130.0	130.00	130.0	130.00	130.0
7	3.0	130.666667	7.371115	125.0	126.50	128.0	133.50	139.0		3.0	128.333333	9.073772	118.0	125.00	132.0	133.50	135.0
8	2.0	134.500000	4.949747	131.0	132.75	134.5	136.25	138.0		2.0	126.500000	4.949747	123.0	124.75	126.5	128.25	130.0
9	1.0	135.000000	NaN	135.0	135.00	135.0	135.00	135.0		1.0	126.000000	NaN	126.0	126.00	126.0	126.00	126.0
20	1.0	125.000000	NaN	125.0	125.00	125.0	125.00	125.0		1.0	105.000000	NaN	105.0	105.00	105.0	105.00	105.0



ranking data

`rank(method="..."):`

returns a rank of every
respective index of a series
passed.

The rank is returned on the
basis of position after sorting
there are a few methods
available



```
df["AbsDiff"].rank()
```



ranking data 2

extra column

`df["AbsDiff"].rank()` ➡ `df["Ranks"] = df["AbsDiff"].rank()`

with sorting

	SBP_before	SBP_after	Difference	AbsDiff	Ranks
13	127	126	1	1	1.0
1	132	134	-2	2	2.5
14	130	132	-2	2	2.5
5	127	130	-3	3	4.0
3	120	124	-4	4	6.0
11	136	140	-4	4	6.0
9	132	128	4	4	6.0
6	136	130	6	6	8.0
12	128	135	-7	7	10.0
0	125	118	7	7	10.0
7	139	132	7	7	10.0
2	138	130	8	8	12.5
8	131	123	8	8	12.5
10	135	126	9	9	14.0
4	125	105	20	20	15.0

	SBP_before	SBP_after	Difference	AbsDiff	Ranks
0	125	118	7	7	10.0
1	132	134	-2	2	2.5
2	138	130	8	8	12.5
3	120	124	-4	4	6.0
4	125	105	20	20	15.0
5	127	130	-3	3	4.0
6	136	130	6	6	8.0
7	139	132	7	7	10.0
8	131	123	8	8	12.5
9	132	128	4	4	6.0
10	135	126	9	9	14.0
11	136	140	-4	4	6.0
12	128	135	-7	7	10.0
13	127	126	1	1	1.0
14	130	132	-2	2	2.5

without sorting

to visualization ...