

Computer Science I

Dr. Chris Bourke

cbourke@cse.unl.edu

Department of Computer Science & Engineering


University of Nebraska–Lincoln

Lincoln, NE 68588, USA

2015/11/15 19:12:58

Version 1.2.0

Copyleft (Copyright)

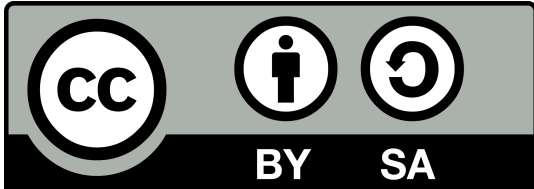

The entirety of this book is free and is released under a **Creative Commons Attribution-ShareAlike 4.0 International License** (see <http://creativecommons.org/licenses/by-sa/4.0/> for details).

Draft Notice

This book is a draft that has been released for evaluation and comment. The draft contains mostly complete chapters up through arrays for three languages (C, Java, and PHP). Subsequent chapters are included as placeholders and indicators for the intended scope of the final draft, but are intentionally left blank. The author encourages people to send feedback including suggestions, corrections, and reviews to inform and influence the final draft. Thank you in advance to anyone helping out or sending constructive criticisms.

Preface

“If you really want to understand something, the best way is to try and explain it to someone else. That forces you to sort it out in your own mind... that’s really the essence of programming. By the time you’ve sorted out a complicated idea into little steps that even a stupid machine can deal with, you’ve certainly learned something about it yourself.” —Douglas Adams, *Dirk Gently’s Holistic Detective Agency* [8]

“The world of A.D. 2014 will have few routine jobs that cannot be done better by some machine than by any human being. Mankind will therefore have become largely a race of machine tenders. Schools will have to be oriented in this direction. All the high-school students will be taught the fundamentals of computer technology, will become proficient in binary arithmetic and will be trained to perfection in the use of the computer languages that will have developed out of those like the contemporary Fortran” —Isaac Asimov 1964

I’ve been teaching Computer Science since 2008 and was a Teaching Assistant long before that. Before that I was a student. During that entire time I’ve been continually disappointed in the value (note, not quality) of textbooks, particularly Computer Science textbooks and especially introductory textbooks. Of primary concern are the costs which have far outstripped inflation over the last 20 years while not providing any real additional value. New editions with trivial changes are released on a regular basis in an attempt to nullify the used book market. Publishers engage in questionable business practices and unfortunately many institutions are complicit in this process.

In established fields such as mathematics and physics, new textbooks are especially questionable as the material and topics don’t undergo many changes. However, in Computer Science, new languages and technologies are created and change at breakneck speeds. Faculty and students are regularly trying to give away stacks of textbooks (“Learn Java 4!”, “Introduction to Cold Fusion”, etc.) that are only a few years old and yet are completely obsolete and worthless. The problem is that such books have built-in obsolescence by focusing too much on technological specifics and not enough on concepts. There are dozens of introductory textbooks for Computer Science; add in the fact that there are multiple languages and many gimmicks (“Learn Multimedia Java”, “Gaming with JavaScript”, “Build a Robot with C!”), its publisher paradise: hundreds of variations, a growing market, and customers with few alternatives.

That’s why I like organizations like Openstax (<http://openstaxcollege.org/>) that attempt to provide free and “open” learning materials. Though they have textbooks for

a variety of disciplines, Computer Science is not one of them (currently that is). This might be due to the fact that there are already a huge amount of resources available online such as tutorials, videos, online open courses, and even interactive code learning tools. With such a huge amount of resources, why write this textbook then? Firstly, layoff. Secondly, I don't really expect this book to have much impact beyond my own courses or department. I wanted a resource that presented Computer Science how I teach it in my courses and it wasn't available. However, if it does find its way into another instructor's classes or into the hands of an aspiring student that wants to learn, then great!

Several years ago our department revamped our introductory courses in a "Renaissance in Computing" initiative in which we redeveloped several different "flavors" of Computer Science I (one intended for Computer Science majors, one for Computer Engineering majors, one for non-CE engineering majors, one for humanities majors, etc.). The courses are intended to be equivalent in content but have a broader appeal to those in different disciplines. The intent was to provide multiple entry points into Computer Science. Once a student had a solid foundation, they could continue into Computer Science II and pick up a second programming language with little difficulty.

This basic idea informed how I structured this book. There is a separation of concepts and programming language syntax. The first part of this book uses pseudocode for example with a minimum of language-specific elements. Subsequent parts of the book recapitulate these concepts but in the context of a specific programming language. This allows for a "plug-in" style approach to Computer Science: the same book could theoretically be used for multiple courses or the book could be extended by adding another part for a new language with minimal effort.

Another inspiration for the structure of this book is the Computer Science I Honors course that I developed. Usually Computer Science majors take CS1 using Java as the primary language while CE students take CS1 using C. Since the honors course consists of both majors (as well as some of the top students), I developed the Honors version to cover *both* languages at the same time in parallel. This has led to many interesting teaching moments: by covering two languages, it provides opportunities to highlight fundamental differences and concepts in programming languages. It also keeps concepts as the focus of the course emphasizing that syntax and idiosyncrasies of individual languages are only of secondary concern. Finally, actively using multiple languages in the first class provides a better opportunity to extend knowledge to other programming languages—once a student has a solid foundation in one language learning a new one should be relatively easy.

The exercises in this book are a variety of exercises I've used in my courses over the years. They have been made as generic as possible so that they could be assigned using any language. While some have emphasized the use of "real-world" exercises (whatever that means), my exercises have focused more on solving problems of a mathematical nature (most of my students have been Engineering students). Some of them are more easily understood if students have had Calculus but it is not absolutely necessary.

It may be cliché, but the two quotes above exemplify what I believe a Computer Science I course is about. The second is from Isaac Asimov who was asked at the 1964 World's Fair what he thought the world of 2014 would look like. His depiction isn't entirely true, but I do believe we are on the verge of a fundamental social change that will be caused by more and more automation. Like the industrial revolution, but on a much smaller time scale and to a far greater extent, automation will fundamentally change how we live and not work (I say "not work" because automation will very easily destroy the vast majority of today's jobs—this a huge economic and political issue that will need to be addressed). The time is quickly approaching where being able to program and develop software will be considered a fundamental skill as essential as arithmetic. I hope this book plays some small role in helping students adjust to that coming world.

The second quote describes programming, or more fundamentally Computer Science and "problem solving." Computers do not solve problems, humans do. Computers only make automating solutions possible quickly and on a large scale. At the end of the day, the human race is still responsible for tending the machines and will be for some time despite what Star Trek and the most optimistic of AI advocates think.

I hope that people find this book useful. If value is a ratio of quality vs cost then this book has already succeeded in having infinite value.¹ If you have suggestions on how to improve it, please feel free to contact me. If you end up using it and finding it useful, please let me know that too!

¹or it might be undefined, or NaN, or this book is **Exceptional** depending on which language sections you read

Acknowledgements

I'd like to thank the Department of Computer Science & Engineering at the University of Nebraska–Lincoln for their support during my writing and maintaining this book.

This book is dedicated to my family.

Contents

Copyleft (Copyright)	i
Draft Notice	iii
Preface	v
Acknowledgements	ix
1. Introduction	1
1.1. Problem Solving	2
1.2. Computing Basics	4
1.3. Basic Program Structure	5
1.4. Syntax Rules & Pseudocode	12
1.5. Documentation, Comments, and Coding Style	12
2. Basics	15
2.1. Control Flow	15
2.1.1. Flow Charts	15
2.2. Variables	16
2.2.1. Naming Rules & Conventions	16
2.2.2. Types	20
2.2.3. Declaring Variables: Dynamic vs. Static Typing	28
2.2.4. Scoping	29
2.3. Operators	30
2.3.1. Assignment Operators	31
2.3.2. Numerical Operators	32
2.3.3. String Concatenation	34
2.3.4. Order of Precedence	35
2.3.5. Common Numerical Errors	36
2.3.6. Other Operators	37
2.4. Basic Input/Output	38
2.4.1. Standard Input & Output	39
2.4.2. Graphical User Interfaces	39
2.4.3. Output Using <code>printf</code> -style Formatting	40
2.4.4. Command Line Input	42

2.5. Debugging	43
2.5.1. Types of Errors	43
2.5.2. Strategies	45
2.6. Examples	46
2.6.1. Temperature Conversion	47
2.6.2. Quadratic Roots	47
2.7. Exercises	48
3. Conditionals	57
3.1. Logical Operators	57
3.1.1. Comparison Operators	58
3.1.2. Negation	60
3.1.3. Logical And	61
3.1.4. Logical Or	62
3.1.5. Compound Statements	63
3.1.6. Short Circuiting	66
3.2. If Statement	67
3.3. If-Else Statement	69
3.4. If-Else-If Statement	71
3.5. Ternary If-Else Operator	74
3.6. Examples	75
3.6.1. Meal Discount	75
3.6.2. Look Before You Leap	76
3.6.3. Comparing Elements	77
3.6.4. Life & Taxes	77
3.7. Exercises	80
4. Loops	87
4.1. While Loops	89
4.1.1. Example	90
4.2. For Loops	91
4.2.1. Example	91
4.3. Do-While Loops	92
4.4. Foreach Loops	94
4.5. Other Issues	95
4.5.1. Nested Loops	95
4.5.2. Infinite Loops	95
4.5.3. Common Errors	97
4.5.4. Equivalency of Loops	98
4.6. Problem Solving With Loops	98
4.7. Examples	99
4.7.1. For vs While Loop	99
4.7.2. Primality Testing	100
4.7.3. Paying the Piper	101

4.8. Exercises	103
5. Functions	121
5.1. Defining & Using Functions	122
5.1.1. Function Signatures	122
5.1.2. Calling Functions	124
5.1.3. Organizing	125
5.2. How Functions Work	125
5.2.1. Call By Value	126
5.2.2. Call By Reference	128
5.3. Other Issues	130
5.3.1. Functions as Entities	130
5.3.2. Function Overloading	132
5.3.3. Variable Argument Functions	133
5.3.4. Optional Parameters & Default Values	133
5.4. Exercises	133
6. Error Handling	137
6.1. Error Handling	139
6.2. Error Handling Strategies	139
6.2.1. Defensive Programming	139
6.2.2. Exceptions	141
6.3. Exercises	143
7. Arrays, Collections & Dynamic Memory	145
7.1. Basic Usage	145
7.2. Static & Dynamic Memory	148
7.2.1. Dynamic Memory	152
7.2.2. Shallow vs. Deep Copies	154
7.3. Multidimensional Arrays	154
7.4. Other Collections	157
7.5. Exercises	158
8. Strings	165
8.1. Basic Operations	165
8.2. Comparisons	166
8.3. Tokenizing	167
8.4. Exercises	167
9. File Input/Output	171
9.1. Processing Files	171
9.1.1. Paths	172
9.1.2. Error Handling	173
9.1.3. Buffered and Unbuffered	173

9.1.4. Binary vs Text Files	174
9.2. Exercises	175
10. Encapsulation & Objects	185
10.1. Objects	186
10.1.1. Structures	186
10.1.2. Construction	186
10.1.3. Usage	186
10.1.4. Composition	186
10.2. Design Considerations	186
10.3. Exercises	187
11. Recursion	189
11.1. Exercises	189
12. Searching & Sorting	191
12.1. Exercises	191
13. Graphical User Interfaces & Event Driven Programming	193
14. Introduction to Databases & Database Connectivity	195
 I. The C Programming Language	 197
15. Basics	199
15.1. Getting Started: Hello World	199
15.2. Basic Elements	200
15.2.1. Basic Syntax Rules	200
15.2.2. Preprocessor Directives	201
15.2.3. Comments	203
15.2.4. The <code>main</code> Function	204
15.3. Variables	204
15.3.1. Declaration & Assignment	205
15.4. Operators	206
15.5. Basic I/O	208
15.6. Examples	209
15.6.1. Converting Units	209
15.6.2. Computing Quadratic Roots	212
16. Conditionals	215
16.1. Logical Operators	215
16.1.1. Order of Precedence	215
16.1.2. Comparing Strings and Characters	217
16.2. If, If-Else, If-Else-If Statements	218

16.3. Examples	219
16.3.1. Computing a Logarithm	219
16.3.2. Life & Taxes	220
16.3.3. Quadratic Roots Revisited	222
17. Loops	227
17.1. While Loops	227
17.2. For Loops	228
17.3. Do-While Loops	229
17.4. Other Issues	229
17.5. Examples	230
17.5.1. Normalizing a Number	230
17.5.2. Summation	230
17.5.3. Nested Loops	231
17.5.4. Paying the Piper	232
18. Functions	235
18.1. Defining & Using Functions	235
18.1.1. Declaration: Prototypes	235
18.1.2. Void Functions	237
18.1.3. Organizing Functions	237
18.1.4. Calling Functions	238
18.2. Pointers	239
18.2.1. Passing By Reference	241
18.2.2. Function Pointers	243
18.3. Examples	244
18.3.1. Generalized Rounding	244
18.3.2. Quadratic Roots	246
19. Error Handling	247
19.1. Language Supported Error Codes	247
19.1.1. POSIX Error Codes	250
19.2. Error Handling By Design	250
19.3. Enumerated Types	251
19.4. Using Enumerated Types for Error Codes	253
20. Arrays	255
20.1. Basic Usage	255
20.2. Dynamic Memory	257
20.3. Using Arrays with Functions	259
20.4. Multidimensional Arrays	260
20.4.1. Contiguous 2-D Arrays	261
20.5. Dynamic Data Structures	263

21. Strings	265
21.1. Character Arrays	265
21.2. String Library	267
21.3. Arrays of Strings	269
21.4. Comparisons	270
21.5. Conversions	271
21.6. Tokenizing	272
22. File I/O	275
22.1. Opening Files	275
22.2. Reading & Writing	276
22.2.1. Plaintext Files	276
22.2.2. Binary Files	278
22.3. Closing Files	279
23. Structures	281
23.1. Defining Structures	281
23.1.1. Alternative Declarations	282
23.1.2. Nested Structures	283
23.2. Usage	284
23.2.1. Declaration & Initialization	284
23.2.2. Selection Operators	285
23.3. Arrays of Structures	287
23.4. Using Structures With Functions	288
23.4.1. Factory Functions	289
23.4.2. To String Functions	290
23.4.3. Passing Arrays of Structures	291
II. The Java Programming Language	293
24. Basics	295
24.1. Getting Started: Hello World	296
24.2. Basic Elements	297
24.2.1. Basic Syntax Rules	297
24.2.2. Program Structure	298
24.2.3. The <code>main</code> Method	299
24.2.4. Comments	300
24.3. Variables	301
24.3.1. Declaration & Assignment	302
24.4. Operators	303
24.5. Basic I/O	305
24.6. Examples	306
24.6.1. Converting Units	306

24.6.2. Computing Quadratic Roots	310
25. Conditionals	313
25.1. Logical Operators	313
25.1.1. Order of Precedence	315
25.1.2. Comparing Strings and Characters	315
25.2. If, If-Else, If-Else-If Statements	317
25.3. Examples	318
25.3.1. Computing a Logarithm	318
25.3.2. Life & Taxes	319
25.3.3. Quadratic Roots Revisited	321
26. Loops	325
26.1. While Loops	325
26.2. For Loops	326
26.3. Do-While Loops	327
26.4. Enhanced For Loops	327
26.5. Examples	328
26.5.1. Normalizing a Number	328
26.5.2. Summation	329
26.5.3. Nested Loops	329
26.5.4. Paying the Piper	330
27. Methods	333
27.1. Defining Methods	334
27.1.1. Void Methods	336
27.1.2. Using Methods	336
27.1.3. Passing By Reference	337
27.2. Examples	338
27.2.1. Generalized Rounding	338
28. Error Handling & Exceptions	341
28.1. Exceptions	341
28.1.1. Catching Exceptions	341
28.1.2. Throwing Exceptions	343
28.1.3. Creating Custom Exceptions	343
28.1.4. Checked Exceptions	344
28.2. Enumerated Types	345
28.2.1. More Tricks	347
29. Arrays	349
29.1. Basic Usage	349
29.2. Dynamic Memory	351
29.3. Using Arrays with Methods	352

29.4. Multidimensional Arrays	353
29.5. Dynamic Data Structures	353
30. Strings	357
30.1. Basics	357
30.2. String Methods	358
30.3. Arrays of Strings	360
30.4. Comparisons	360
30.5. Tokenizing	362
31. File I/O	363
31.1. File Input	363
31.2. File Output	364
32. Objects	367
 III. The PHP Programming Language	 369
33. Basics	371
33.1. Getting Started: Hello World	371
33.2. Basic Elements	372
33.2.1. Basic Syntax Rules	373
33.2.2. PHP Tags	373
33.2.3. Libraries	374
33.2.4. Comments	374
33.2.5. Entry Point & Command Line Arguments	376
33.3. Variables	376
33.3.1. Using Variables	377
33.4. Operators	378
33.4.1. Type Juggling	379
33.4.2. String Concatenation	382
33.5. Basic I/O	382
33.6. Examples	384
33.6.1. Converting Units	384
33.6.2. Computing Quadratic Roots	386
34. Conditionals	389
34.1. Logical Operators	389
34.1.1. Order of Precedence	391
34.2. If, If-Else, If-Else-If Statements	391
34.3. Examples	393
34.3.1. Computing a Logarithm	393
34.3.2. Life & Taxes	395

34.3.3. Quadratic Roots Revisited	396
35. Loops	399
35.1. While Loops	399
35.2. For Loops	400
35.3. Do-While Loops	401
35.4. Foreach Loops	401
35.5. Examples	402
35.5.1. Normalizing a Number	402
35.5.2. Summation	402
35.5.3. Nested Loops	403
35.5.4. Paying the Piper	403
36. Functions	407
36.1. Defining & Using Functions	407
36.1.1. Declaring Functions	407
36.1.2. Organizing Functions	409
36.1.3. Calling Functions	409
36.1.4. Passing By Reference	410
36.1.5. Function Pointers	411
36.2. Examples	411
36.2.1. Generalized Rounding	411
36.2.2. Quadratic Roots	412
37. Error Handling & Exceptions	415
37.1. Throwing Exceptions	415
37.2. Catching Exceptions	415
37.3. Creating Custom Exceptions	416
38. Arrays	419
38.1. Creating Arrays	419
38.2. Indexing	419
38.2.1. Strings as Indices	420
38.2.2. Non-Contiguous Indices	421
38.2.3. Key-Value Initialization	421
38.3. Useful Functions	421
38.4. Iteration	423
38.5. Adding Elements	423
38.6. Removing Elements	424
38.7. Using Arrays in Functions	425
38.8. Multidimensional Arrays	426
39. Strings	429
39.1. Basics	429

39.2. String Functions	430
39.3. Arrays of Strings	431
39.4. Comparisons	432
39.5. Tokenizing	433
40. File I/O	435
40.1. Opening Files	435
40.2. Reading & Writing	436
40.2.1. Using URLs	437
40.2.2. Closing Files	438
41. Objects	439
Glossary	441
Acronyms	451
Index	456
References	458

List of Algorithms

1.1. An example of pseudocode: finding a minimum value	13
2.1. Assignment Operator Demonstration	32
2.2. Addition and Subtraction Demonstration	33
2.3. Multiplication and Division Demonstration	33
2.4. Temperature Conversion Program	47
2.5. Quadratic Roots Program	48
3.1. An if-statement	69
3.2. An if-else Statement	71
3.3. Example If-Else-If Statement	72
3.4. General If-Else-If Statement	72
3.5. If-Else-If Statement With a Bug	74
3.6. A simple receipt program	76
3.7. Preventing Division By Zero Using an If Statement	76
3.8. Comparing Students by Name	77
3.9. Computing Tax Liability with If-Else-If	79
3.10. Computing Tax Credit with If-Else-If	79
4.1. Counter-Controlled While Loop	89
4.2. Normalizing a Number With a While Loop	90
4.3. A General For Loop	91
4.4. Counter-Controlled For Loop	91
4.5. Summation of Numbers in a For Loop	92
4.6. Counter-Controlled Do-While Loop	92

LIST OF ALGORITHMS

4.7. Flag-Controlled Do-While Loop	94
4.8. Example Foreach Loop	94
4.9. Foreach Loop Computing Grades	95
4.10. Nested For Loops	95
4.11. Infinite Loop	96
4.12. Computing the Geometric Series Using a For Loop	99
4.13. Computing the Geometric Series Using a While Loop	100
4.14. Determining if a Number is Prime or Composite	101
4.15. Counting the number of primes.	101
4.16. Computing a loan amortization schedule	103
4.17. Scaling a Value	115
5.1. A function in pseudocode	123
5.2. Using a function	124

List of Code Samples

1.1. A simple program in C	9
1.2. A simple program in C, compiled to assembly	10
1.3. A simple program in C, resulting machine code formatted in hexadecimal (partial)	11
2.1. Example of variable scoping in C	30
2.2. Compound Assignment Operators in C	38
2.3. <code>printf</code> examples in C	42
2.4. Result of Computation in Code Sample 2.3. Spaces are highlighted for clarity.	43
4.1. Zune Bug	97
15.1. Hello World Program in C	200
15.2. Fahrenheit-to-Celsius Conversion Program in C	212
15.3. Quadratic Roots Program in C	214
16.1. Examples of Conditional Statements in C	218
16.2. Logarithm Calculator Program in C	223
16.3. Tax Program in C	224
16.4. Quadratic Roots Program in C With Error Checking	225
17.1. While Loop in C	227
17.2. Flag-controlled While Loop in C	228
17.3. For Loop in C	228
17.4. Do-While Loop in C	229
17.5. Normalizing a Number with a While Loop in C	230
17.6. Summation of Numbers using a For Loop in C	231
17.7. Nested For Loops in C	231
17.8. Loan Amortization Program in C	233
24.1. Hello World Program in Java	296
24.2. Basic Input/Output in Java	306
24.3. Fahrenheit-to-Celsius Conversion Program in Java	309
24.4. Quadratic Roots Program in Java	312
25.1. Examples of Conditional Statements in Java	317
25.2. Logarithm Calculator Program in Java	322

25.3. Tax Program in Java	323
25.4. Quadratic Roots Program in Java With Error Checking	324
26.1. While Loop in Java	325
26.2. Flag-controlled While Loop in Java	326
26.3. For Loop in Java	326
26.4. Do-While Loop in Java	327
26.5. Enhanced For Loops in Java Example 1	328
26.6. Enhanced For Loops in Java Example 2	328
26.7. Normalizing a Number with a While Loop in Java	328
26.8. Summation of Numbers using a For Loop in Java	329
26.9. Nested For Loops in Java	329
26.10 Loan Amortization Program in Java	331
33.1. Hello World Program in PHP	372
33.2. Hello World Program in PHP with HTML	372
33.3. Type Juggling in PHP	380
33.4. Fahrenheit-to-Celsius Conversion Program in PHP	386
33.5. Quadratic Roots Program in PHP	387
34.1. Examples of Conditional Statements in PHP	392
34.2. Logarithm Calculator Program in C	394
34.3. Tax Program in PHP	397
34.4. Quadratic Roots Program in PHP With Error Checking	398
35.1. While Loop in PHP	399
35.2. Flag-controlled While Loop in PHP	400
35.3. For Loop in PHP	400
35.4. Do-While Loop in PHP	401
35.5. Normalizing a Number with a While Loop in PHP	402
35.6. Summation of Numbers using a For Loop in PHP	402
35.7. Nested For Loops in PHP	403
35.8. Loan Amortization Program in PHP	405

List of Figures

1.1. A Compiling Process	8
2.1. Types of Flowchart Nodes	16
2.2. Example of a flow chart for a simple ATM process	17
2.3. Elements of a <code>printf</code> statement in C	41
3.1. Control flow diagrams for sequential control flow and an if-statement. . .	68
3.2. An if-else Flow Chart	70
3.3. Control Flow for an If-Else-If Statement	73
3.4. Quadrants of the Cartesian Plane	80
3.5. Three types of triangles	83
3.6. Intersection of Two Rectangles	84
3.7. Examples of Floor Tiling	86
4.1. A Typical Loop Flow Chart	88
4.2. A Do-While Loop Flow Chart. The continuation condition is checked <i>after</i> the loop body.	93
4.3. Plot of $f(x) = \frac{\sin x}{x}$	108
4.4. A rectangle for the interval $[-5, 5]$	109
4.5. Follow the bouncing ball	110
4.6. Sampling points in a circle	111
4.7. Regular polygons	112
5.1. A function declaration (prototype) in the C programming language with the return type, identifier, and parameter list labeled.	123
5.2. Program Stack	127
5.3. Demonstration of Pass By Value	129
5.4. Demonstration of Pass By Reference	131
7.1. Example of an Array	146
7.2. Example returning a static array	149
7.3. Pitfalls of Returning Static Arrays	151
7.4. Depiction of Application Memory.	153
7.5. Shallow vs. Deep Copies	155
9.1. An example polygon for $n = 5$	175
9.2. A Word Search	176

List of Figures

9.3. A solved Sudoku puzzle	178
9.4. A DNA Sequence	181
9.5. Codon Table for RNA to Protein Translation	183
18.1. Pointer Operations	242
20.1. Dynamically Allocating Multidimensional Arrays	262

1. Introduction

Computers are awesome. The human race has seen more advancements in the last 50 years than in the entire 10,000 years of human history. Technology has transformed the way we live our daily lives, how we interact with each other, and has changed the course of our history. Today, everyone carries smart phones which have more computational power than supercomputers from 20 years ago. Computing has become ubiquitous, the “internet of things” will soon become a reality in which every device will become interconnected and data will be collected and available even about the smallest of minutiae.

However, computers are also dumb. Despite the most fantastical of depictions in science fiction and hopes of Artificial Intelligence, computers can only do what they are told to do. The fundamental art of Computer Science is problem solving. Computers are not good at problem solving; *you* are the problem solver. It is still up to you, the user, to approach a complex problem, study it, understand it, and develop a solution to it. Computers are only good at automating solutions once you have solved the problem.

Computational sciences have become a fundamental tool of almost every discipline. Scholars have used textual analysis and data mining techniques to analyze classical literature and historic texts, providing new insights and opening new areas of study. Astrophysicists have used computational analysis to detect dozens of new exoplanets. Complex visualizations and models can predict astronomical collisions on a galactic scale. Physicists have used big data analytics to push the boundaries of our understanding of matter in the search for the Higgs boson and study of elementary particles. Chemists simulate the interaction of millions of combinations of compounds without the need for expensive and time consuming physical experiments. Biologists use massively distributed computing models to simulate protein folding and other complex processes. Meteorologists can predict weather and climactic changes with ever greater accuracy.

Technology and data analytics have changed how political campaigns are run, how products are marketed and even delivered. Social networks can be data mined to track and predict the spread of flu epidemics. Computing and automation will only continue to grow. The time is soon coming where basic computational thinking and the ability to develop software will be considered a basic skill necessary to every discipline, a requirement for many jobs and an essential skill akin to arithmetic.

Computer Science is not programming. Programming is a necessary skill, but it is only the beginning. This book is intended to get you started on your journey.

1.1. Problem Solving

At its heart, Computer Science is about problem solving. Not problem solving as a discipline, it would be hubris to think that Computer Science holds a monopoly on “problem solving.” Indeed, it would be hard to find any discipline in which solving problems was not a substantial aspect or motivation if not integral. Instead, Computer Science is the study of computers and computation. It involves studying and understanding computational processes and the development of algorithms and techniques and how they apply to problems.

Problem solving skills are not something that can be distilled down into a single step-by-step process. Each area and each problem comes with its own unique challenges and considerations. General problem solving techniques can be identified, studied and taught, but problem solving skills are something that come with experience, hard work, and most importantly, failure. Problem solving is part and parcel of the human experience.

That doesn’t mean we can’t identify techniques and strategies for approaching problems, in particular problems that lend themselves to computational solutions. A prerequisite to solving a problem is *understanding* it. What is the problem? Who or what entities are involved in the problem? How do those entities interact with each other? What are the problems or deficiencies that need to be addressed? Answering these questions, we get an idea of *where we are*.

Ultimately, what is desired in a solution? What are the objectives that need to be achieved? What would an ideal solution look like or what would it do? Who would use the solution and how would they use it? By answering these questions, we get an idea of *where we want to be*.

Once we know where we are and where we want to be, the problem solving process can begin: how do we get from point *A* to point *B*?

One of the first things a good engineer asks is: does a solution already exist? If a solution already exists, then the problem is already solved! Ideally the solution is an “off-the-shelf” solution: something that already exists and which may have been designed for a different purpose but that can be *repurposed* for our problem. However, there may be exceptions to this. The existing solution may be infeasible: it may be too resource intensive or expensive. It may be too difficult or too expensive to adapt to our problem. It may solve most of our problem, but may not work in some corner cases. It may need to be heavily modified in order to work. Still, this basic question may save a lot of time and effort in many cases.

In a very broad sense, the problem solving process is one that involves

1. Design
2. Implementation
3. Testing

4. Refinement

After one has a good understanding of a problem, they can start designing a solution. A design is simply a plan on the construction of a solution. A design “on paper” allows you to see what the potential solution would look like before investing the resources in building it. It also allows you to identify possible impediments or problems that were not readily apparent. A design allows you to an opportunity to think through possible alternative solutions and weigh the advantages and disadvantages of each. Designing a solution also allows you to understand the problem better.

Design can involve gathering requirements and developing use cases. How would an individual *use* the proposed solution? What features would they need or want?

Implementations can involve building prototype solutions to test the feasibility of the design. It can involve building individual components and integrating them together.

Testing involves finding, designing, and developing test cases: actual instances of the problem that can be used to test your solution. Ideally, the a test case instance involves not only the “input” of the problem, but also the “output” of the problem: a feasible or optimal solution that is known to be correct via other means. Test cases allow us to test our solution to see if it gives correct and perhaps optimal solutions.

Refinement is a process by which we can redesign, reimplement and retest our solution. We may want to make the solution more efficient, cheaper, simpler or more elegant. We may find there are components that are redundant or unnecessary and try to eliminate them. We may find errors or bugs in our solution that fail to solve the problem for some or many instances. We may have misinterpreted requirements or there may have been miscommunication, misunderstanding or differing expectations in the solution between the designers and stakeholders. Situations may change or requirements may have been modified or new requirements created and the solution needs to be adapted. Each of these steps may need to be repeated many times until an ideal solution, or at least acceptable, solution is achieved.

Yet another phase of problem solving is maintenance. The solution we create may need to be maintained in order to remain functional and stay relevant. Design flaws or bugs may become apparent that were missed in the process. The solution may need to be updated to adapt to new technology or requirements.

In software design there are two general techniques for problem solving; top-down and bottom-up design. A [top-down design](#) strategy approaches a problem by breaking it down into smaller and smaller problems until either a solution is obvious or trivial or a preexisting solution (the aforementioned “off-the-shelf” solution) exists. The solutions to the subproblems are combined and interact to solve the overall problem.

A bottom-up strategy attempts to first completely define the smallest components or entities that make up a system first. Once these have been defined and implemented, they are combined and interactions between them are defined to produce a more complex system.

1.2. Computing Basics

Everyone has some level of familiarity with computers and computing devices just as everyone has familiarity with automotive basics. However, just because you drive a car everyday doesn't mean you can tell the difference between a crankshaft and a piston. To start, let's familiarize ourselves with some basic concepts.

A computer is a device, usually electronic, that stores, receives, processes, and outputs information. Modern computing devices include everything from simple sensors to mobile devices, tablets, desktops, mainframes/servers, supercomputers, to huge grid clusters consisting of multiple computers networked together.

Computer hardware usually refers to the physical components in a computing system which includes input devices such as a mouse/touchpad, keyboard, or touchscreen, output devices such as monitors, storage devices such as hard disks and solid state drives, as well as the electronic components such as graphics cards, main memory, motherboards and chips that make up the [Central Processing Unit \(CPU\)](#).

Computer processors are complex electronic circuits (referred to as [Very Large Scale Integration \(VLSI\)](#)) which contain thousands of microscopic electronic transistors—electronic “gates” that can perform logical operations and complex instructions. In addition to the [CPU](#) a processor may contain an [Arithmetic and Logic Unit \(ALU\)](#) that performs arithmetic operations such as addition, multiplication, division, etc.

Computer Software usually refers to the actual machine instructions that are run on a processor. Software is usually written in a high-level programming language such as C or Java and then converted to machine code that the processor can execute.

Computers “speak” in binary code. Binary is nothing more than a structured collection of 0s and 1s. A single 0 or 1 is referred to as a [bit](#). Bits can be collected to form larger chunks of information: 8 bits form a [byte](#), 1024 bytes is referred to as a kilobyte, etc. Table 1.1 contains a several more binary units. Each unit is in terms of a power of 2 instead of a power of 10. As humans, we are more familiar with decimal—base-10 numbers and so units are usually expressed as powers of 10, kilo- refers to 10^3 , mega- is 10^6 , etc. However, since binary is base-2 (0 or 1), units are associated with the closest power of 2.

Computers are binary machines because it is the most practical to implement in electronic devices. 0s and 1s can be easily represented by low/high voltage; low/high frequency; on-off; etc. It is much easier to design and implement systems that switch between only two states.

Computer *memory* can refer to *secondary memory* which are typically longterm storage devices such as hard disks, flash drives, SD cards, optical disks (CDs, DVDs), etc. These generally have large capacity but are slower (the time it takes to access a chunk of data is longer). Or, it can refer to *main memory* (or primary memory): data stored on chips that is much faster but also more expensive and thus generally smaller.

Unit	2^n	Number of bytes
Kilobyte (KB)	2^{10}	1,024
Megabyte (MB)	2^{20}	1,048,576
Gigabyte (GB)	2^{30}	1,073,741,824
Terabyte (TB)	2^{40}	1,099,511,627,776
Petabyte (PB)	2^{50}	1,125,899,906,842,624
Exabyte (EB)	2^{60}	1,152,921,504,606,846,976
Zettabyte (ZB)	2^{70}	1,180,591,620,717,411,303,424
Yottabyte (YB)	2^{80}	1,208,925,819,614,629,174,706,176

Table 1.1.: Various units of digital information with respect to bytes.

The first hard disk (IBM 350) was developed in 1956 by IBM and had a capacity of 3.75MB and cost \$3,200 (\$27,500 in 2015 dollars) per month to lease. For perspective, the first commercially available TB hard drive was released in 2007. As of 2015, terabyte hard disks can be commonly purchased for 50–100.

Main memory, sometimes referred to as [Random Access Memory \(RAM\)](#) consists of a collection of *addresses* along with *contents*. An address usually refers to a single byte of memory. The content, that is the byte of data that is stored at an address, can be anything. It can represent a number, a letter, etc. In the end, to the computer its all just a bunch of 0s and 1s. For convenience, data, in particular memory addresses are represented using hexadecimal, which is a base-16 counting system using the symbols $0, 1, \dots, 9, a, b, c, d, e, f$. Numbers are prefixed with a 0x to indicate they represent hexadecimal numbers.

Separate computing devices can be connected to each other through a *network*. Networks can be wired which provide large bandwidth (the amount of data that can be sent at any one time), but expensive to build and maintain. They can also be wireless, but provide shorter range and lower bandwidth.

1.3. Basic Program Structure

Programs start out as *source code*, a collection of instructions usually written in a high-level programming language. A source file containing source code is nothing more than a plain text file that can be edited by any text editor. However, many developers and programmers utilize modern [Integrated Development Environment \(IDE\)](#) that provide a text editor with *code highlighting*: various elements are displayed in various colors to make the code more readable and various elements can be easily identified. Mistakes such as unclosed comments or curly brackets can be readily apparent with such editors. IDEs can also provide automated compile/build features and other tools that make the development process easier and faster.

1. Introduction

Address	Contents
⋮	⋮
0x7fff58310b8f	
0x7fff58310b8b	0x32
0x7fff58310b8a	0x3e
0x7fff58310b89	0xcf
0x7fff58310b88	0x23
0x7fff58310b87	0x01
0x7fff58310b86	0x32
0x7fff58310b85	0x7c
0x7fff58310b84	0xff
0x7fff58310b83	3.14159265359
0x7fff58310b82	
0x7fff58310b81	
0x7fff58310b80	
0x7fff58310b7f	
0x7fff58310b7e	
0x7fff58310b7d	
0x7fff58310b7c	
0x7fff58310b7b	32,321,231
0x7fff58310b7a	
0x7fff58310b79	
0x7fff58310b78	
0x7fff58310b77	1,458,321
0x7fff58310b76	
0x7fff58310b75	
0x7fff58310b74	
0x7fff58310b73	\0
0x7fff58310b72	o
0x7fff58310b71	l
0x7fff58310b70	l
0x7fff58310b6f	e
0x7fff58310b6e	H
0x7fff58310b88	0xfa
0x7fff58310b87	0xa8
0x7fff58310b86	0xba
⋮	⋮

Table 1.2.: Depiction of Computer Memory. Each address refers to a byte, but different types of data (integers, floating-point numbers, characters) take different amounts of memory. Memory addresses and some data is represented in *hexadecimal*.

Some languages are *compiled* languages meaning that a source file must be translated into the machine code that a processor can understand and execute. This is actually a multistep process. A compiler may first preprocess the source file(s) and perform some pre-compiler operations. It may then transform the source code into another language such as an assembly language, a lower level, more machine-like language. Ultimately, the compiler transforms the source code into object code, a binary format that the machine can understand.

To produce an executable file that can actually be run, a *linker* may then take the object code and link in any other necessary objects or precompiled library code necessary to produce a final program. Finally, an executable file (still just a bunch of binary code) is produced.

We can now execute the program. When a program is executed, a request is sent to the operating system to load and run the program. The operating system loads the executable file into memory and may setup additional memory for its variables as well as its *call stack* (memory to enable the program to make function calls). Once loaded and setup, the operating system begins executing the instructions at the program's entry point.

In many languages, a program's entry point is defined by a *main* function or method. A program may contain many functions and pieces of code, but this special function is defined as the one that gets called when a program starts. Without a main function, the code may still be useful: libraries contain many useful functions and procedures so that you don't have to write a program from scratch. However, these functions are not intended to be run by themselves. Instead, they are written so that other programs can use them. A program becomes executable when a main entry point is provided.

This compile-link-execute process is roughly depicted in Figure 1.1. An example of a simple C program can be found in Figure 1.1 along with the resulting assembly code produced by a compiler (gcc) in Figure 1.2 and the final machine code represented in hexadecimal in Figure 1.3.

In contrast, some languages are *interpreted*, not compiled. Instead, the source code is contained in a file usually referred to as a *script*. Rather than being run directly by an operating system, the operating system loads and execute another program called an *interpreter*. The interpreter then loads the script, parses, and execute its instructions. Interpreted languages may still have a predefined main function, but in general, a script starts executing starting with the first instruction in the script file. Adhering to the syntax rules is still important, but since interpreted languages are not compiled, syntax errors become runtime errors. A program may run fine until its first syntax error at which point it fails.

There are other ways of compiling and running programs. Java for example represents a compromise between compiled and interpreted languages. Java source code is compiled into Java bytecode which is not actually machine code that the operating system and hardware can run directly. Instead, it is compiled code for a [Java Virtual Machine \(JVM\)](#).

1. Introduction

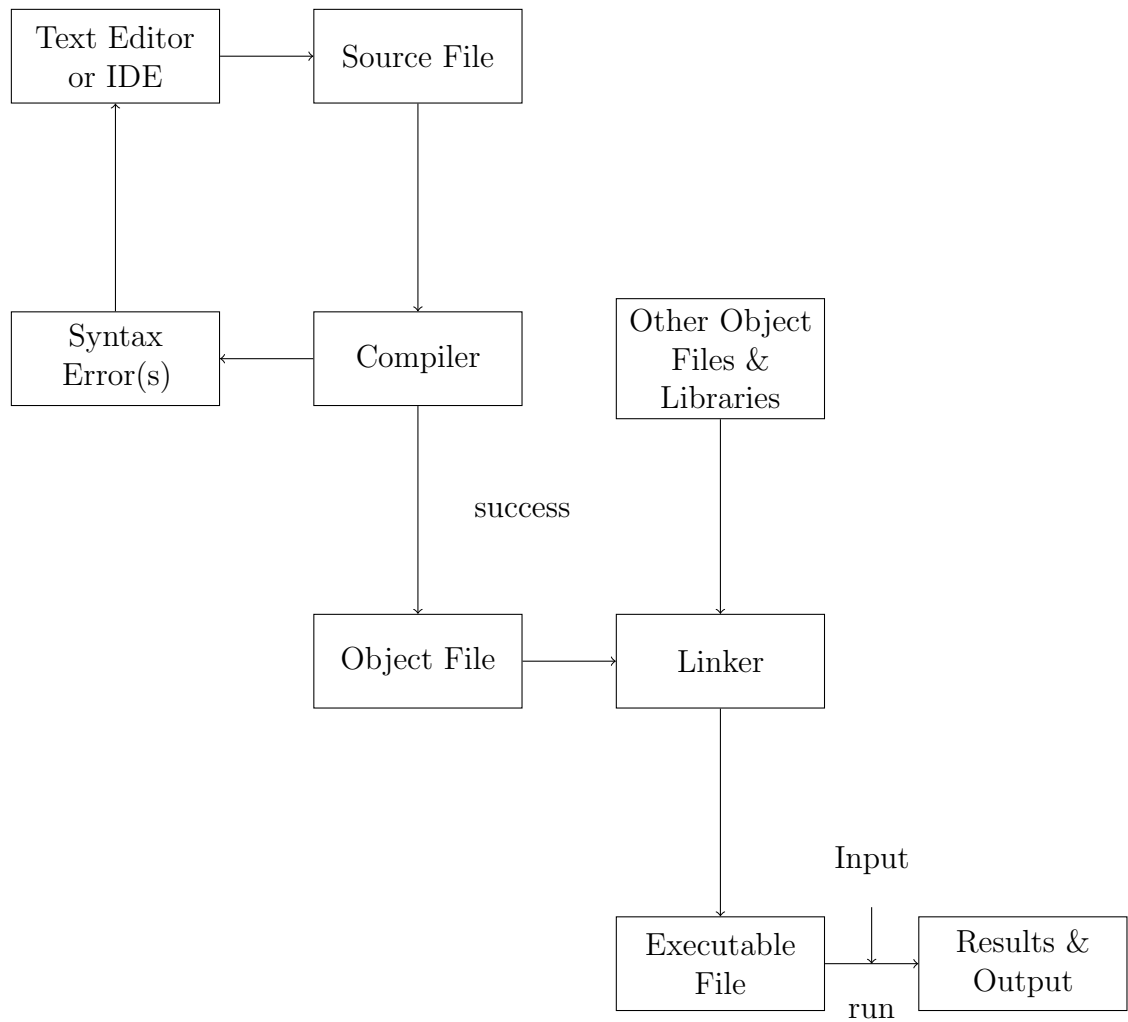


Figure 1.1.: A Compiling Process

```

1  #include<stdlib.h>
2  #include<stdio.h>
3  #include<math.h>
4
5  int main(int argc, char **argv) {
6
7      if(argc != 2) {
8          fprintf(stderr, "Usage: %s x\n", argv[0]);
9          exit(1);
10     }
11
12     double x = atof(argv[1]);
13     double result = sqrt(x);
14
15     if(x < 0) {
16         fprintf(stderr, "Cannot handle complex roots\n");
17         exit(2);
18     }
19
20     printf("square root of %f = %f\n", x, result);
21
22     return 0;
23 }

```

Code Sample 1.1: A simple program in C

This allows a developer to write highly portable code, compile it and it is runnable on any [JVM](#) on any system (write-once, compile-once, run-anywhere).

In general, interpreted languages are slower than compiled languages because they are being run through another program (the interpreter) instead of being executed directly by the processor. Modern tools have been introduced to solve this problem. [Just In Time \(JIT\)](#) compilers have been developed that take scripts that are not usually compiled, and compile them to a native machine code format which has the potential to run much faster than when interpreted. Modern web browsers typically do this for JavaScript code (Chrome's V8 JavaScript engine for example).

Transpilers are source-to-source compilers. They don't produce assembly or machine code, instead they take one language and translate it to another language. This is sometimes done to ensure that scripting languages like JavaScript are backwards compatible with previous versions of the language. Transpilers can also be used to translate one language into the same language but with different aspects (such as parallel or synchronized code) automatically added. They can also be used to translate older languages such as Pascal to more modern languages as a first step in updating a legacy system.

1. Introduction

```
.section      __TEXT,__text,regular,pure_instructions
.globl       _main
.align       4, 0x90
_main:
.cfi_startproc
## BB#0:
pushq        %rbp
Ltmp2:
.cfi_def_cfa_offset 16
Ltmp3:
.cfi_offset %rbp, -16
movq         %rsp, %rbp
Ltmp4:
.cfi_def_cfa_register %rbp
subq         $48, %rsp
movl         $0, -4(%rbp)
movl         %edi, -8(%rbp)
movq         %rsi, -16(%rbp)
cmpl         $2, -8(%rbp)
je           LBB0_2
## BB#1:
leaq         L_.str(%rip), %rsi
movq         ___stderrp@GOTPCREL(%rip), %rax
movq         (%rax), %rdi
movq         -16(%rbp), %rax
movq         (%rax), %rdx
movb         $0, %al
callq        _fprintf
movl         $1, %edi
movl         %eax, -36(%rbp)      ## 4-byte Spill
callq        _exit
LBB0_2:
movq         -16(%rbp), %rax
movq         8(%rax), %rdi
callq        _atof
xorps        %xmm1, %xmm1
movsd        %xmm0, -24(%rbp)
movsd        -24(%rbp), %xmm0
sqrtsd       %xmm0, %xmm0
movsd        %xmm0, -32(%rbp)
ucomisd      -24(%rbp), %xmm1
jbe          LBB0_4
## BB#3:
leaq         L_.str1(%rip), %rsi
movq         ___stderrp@GOTPCREL(%rip), %rax
movq         (%rax), %rdi
movb         $0, %al
callq        _fprintf
movl         $2, %edi
movl         %eax, -40(%rbp)      ## 4-byte Spill
callq        _exit
LBB0_4:
leaq         L_.str2(%rip), %rdi
movsd        -24(%rbp), %xmm0
movsd        -32(%rbp), %xmm1
movb         $2, %al
callq        _printf
movl         $0, %ecx
movl         %eax, -44(%rbp)      ## 4-byte Spill
movl         %ecx, %eax
addq         $48, %rsp
popq         %rbp
retq
.cfi_endproc

.section      __TEXT,__cstring,cstring_literals
L_.str:
.asciz       "Usage: %s x\n"

L_.str1:
.asciz       "Cannot handle complex roots\n"

L_.str2:
.asciz       "square root of %f = %f\n"

.subsections_via_symbols
```

Code Sample 1.2: A simple program in C, compiled to assembly

```

00000e40 55 48 89 e5 48 83 ec 30 c7 45 fc 00 00 00 00 89 |UH..H..0.E.....|
00000e50 7d f8 48 89 75 f0 81 7d f8 02 00 00 00 0f 84 2c |}.H.u..}.....,|
00000e60 00 00 00 48 8d 35 f2 00 00 00 48 8b 05 9f 01 00 |...H.5...H.....|
00000e70 00 48 8b 38 48 8b 45 f0 48 8b 10 b0 00 e8 94 00 |.H.8H.E.H.....|
00000e80 00 00 bf 01 00 00 00 89 45 dc e8 81 00 00 00 48 |.....E.....H|
00000e90 8b 45 f0 48 8b 78 08 e8 6e 00 00 00 0f 57 c9 f2 |.E.H.x..n....W..|
00000ea0 0f 11 45 e8 f2 0f 10 45 e8 f2 0f 51 c0 f2 0f 11 |..E....E...Q....|
00000eb0 45 e0 66 0f 2e 4d e8 0f 86 25 00 00 00 48 8d 35 |E.f..M...%...H.5|
00000ec0 a5 00 00 00 48 8b 05 45 01 00 00 48 8b 38 b0 00 |....H..E...H.8..|
00000ed0 e8 41 00 00 00 bf 02 00 00 00 89 45 d8 e8 2e 00 |.A.....E....|
00000ee0 00 00 48 8d 3d 9d 00 00 00 f2 0f 10 45 e8 f2 0f |..H.=.....E....|
00000ef0 10 4d e0 b0 02 e8 22 00 00 00 b9 00 00 00 00 89 |.M....".....|
00000f00 45 d4 89 c8 48 83 c4 30 5d c3 ff 25 08 01 00 00 |E...H..0]...%....|
00000f10 ff 25 0a 01 00 00 ff 25 0c 01 00 00 ff 25 0e 01 |.%....%....%..|
00000f20 00 00 00 00 4c 8d 1d dd 00 00 00 41 53 ff 25 cd |...L.....AS.%.|
00000f30 00 00 00 90 68 00 00 00 00 e9 e6 ff ff ff 68 0c |....h.....h..|
00000f40 00 00 00 e9 dc ff ff ff 68 18 00 00 00 e9 d2 ff |.....h.....|
00000f50 ff ff 68 27 00 00 00 e9 c8 ff ff ff 55 73 61 67 |..h'.....Usag|
00000f60 65 3a 20 25 73 20 78 0a 00 43 61 6e 6e 6f 74 20 |e: %s x..Cannot |
00000f70 68 61 6e 64 6c 65 20 63 6f 6d 70 6c 65 78 20 72 |handle complex r|
00000f80 6f 6f 74 73 0a 00 73 71 75 61 72 65 20 72 6f 6f |oots..square roo|
00000f90 74 20 6f 66 20 25 66 20 3d 20 25 66 0a 00 00 00 |t of %f = %f....|
00000fa0 01 00 00 00 1c 00 00 00 00 00 00 00 1c 00 00 00 |.....|
00000fb0 00 00 00 00 1c 00 00 00 02 00 00 00 40 0e 00 00 |.....@...|
00000fc0 34 00 00 00 34 00 00 00 0b 0f 00 00 00 00 00 00 |4...4.....|
00000fd0 34 00 00 00 03 00 00 00 0c 00 01 00 10 00 01 00 |4.....|
00000fe0 00 00 00 00 00 00 00 01 14 00 00 00 00 00 00 00 |.....|
00000ff0 01 7a 52 00 01 78 10 01 10 0c 07 08 90 01 00 00 |.zR..x.....|
00001000 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 |.....|
00001010 00 00 00 00 00 00 00 00 34 0f 00 00 01 00 00 00 |.....4.....|
00001020 3e 0f 00 00 01 00 00 00 48 0f 00 00 01 00 00 00 |>.....H.....|
00001030 52 0f 00 00 01 00 00 00 00 00 00 00 00 00 00 00 |R.....|
00001040 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 |.....|
*
00002000 11 22 18 54 00 00 00 00 11 40 5f 5f 5f 73 74 64 ||.T.....@__std|
00002010 65 72 72 70 00 51 72 10 90 40 64 79 6c 64 5f 73 |errp.Qr...@dyld_s|
00002020 74 75 62 5f 62 69 6e 64 65 72 00 80 e8 ff ff ff |tub_binder.....|
00002030 ff ff ff ff ff 01 90 00 72 18 11 40 5f 61 74 6f |.....r...@_ato|
00002040 66 00 90 00 72 20 11 40 5f 65 78 69 74 00 90 00 |f...r ..._exit...|
00002050 72 28 11 40 5f 66 70 72 69 6e 74 66 00 90 00 72 |r(._fprintf...r|
00002060 30 11 40 5f 70 72 69 6e 74 66 00 90 00 00 00 00 |0._printf.....|
00002070 00 01 5f 00 05 00 02 5f 6d 68 5f 65 78 65 63 75 |..._mh_execu|
00002080 74 65 5f 68 65 61 64 65 72 00 21 6d 61 69 6e 00 |te_header.!main.|
00002090 25 02 00 00 00 03 00 c0 1c 00 00 00 00 00 00 00 |%.....|
000020a0 c0 1c 00 00 00 00 00 00 fa de 0c 05 00 00 00 14 |.....|
000020b0 00 00 00 01 00 00 00 00 00 00 00 00 00 00 00 00 |.....|
000020c0 02 00 00 00 0f 01 10 00 00 00 00 00 01 00 00 00 |.....|
000020d0 16 00 00 00 0f 01 00 00 40 0e 00 00 01 00 00 00 |.....@.....|
000020e0 1c 00 00 00 01 00 00 01 00 00 00 00 00 00 00 00 |.....|
000020f0 27 00 00 00 01 00 00 01 00 00 00 00 00 00 00 00 |'.....|
00002100 2d 00 00 00 01 00 00 01 00 00 00 00 00 00 00 00 |-.....|
00002110 33 00 00 00 01 00 00 01 00 00 00 00 00 00 00 00 |3.....|
00002120 3c 00 00 00 01 00 00 01 00 00 00 00 00 00 00 00 |<.....|
00002130 44 00 00 00 01 00 00 01 00 00 00 00 00 00 00 00 |D.....|
00002140 03 00 00 00 04 00 00 00 05 00 00 00 06 00 00 00 |.....|
00002150 07 00 00 00 00 00 00 00 02 00 00 00 03 00 00 00 |.....@.....|
00002160 04 00 00 00 05 00 00 00 06 00 00 00 20 00 5f 5f |..... _..|
00002170 6d 68 5f 65 78 65 63 75 74 65 5f 68 65 61 64 65 |mh_execute_heade|
00002180 72 00 5f 6d 61 69 6e 00 5f 5f 5f 73 74 64 65 72 |r._main.___stdcr|
00002190 72 70 00 5f 61 74 6f 66 00 5f 65 78 69 74 00 5f |rp._atof._exit._|
000021a0 66 70 72 69 6e 74 66 00 5f 70 72 69 6e 74 66 00 |fprintf._printf.|
000021b0 64 79 6c 64 5f 73 74 75 62 5f 62 69 6e 64 65 72 |dyld_stub_binder|
000021c0 00 00 00 00
000021c4

```

Code Sample 1.3: A simple program in C, resulting machine code formatted in hexadecimal (partial)

1.4. Syntax Rules & Pseudocode

Programming languages are a lot like spoken languages in that they have *syntax* rules. These rules dictate the appropriate arrangements of words, punctuation, and other symbols that form valid statements in the language. For example, many programming languages, commands or statements are terminated by semicolons (just as most sentences are terminated with a period). This is an example of “punctuation” a programming language.

In general, individual executable commands are written one per line. When a program executes, each command executes one after the other. This is known as sequential control flow.

A *block* of code is a section of code that has been logically grouped together. Many languages allow you to define a block by enclosing the grouped code around opening and closing curly brackets. Blocks can be *nested* within each other to form sub-blocks.

Most languages also have reserved words and symbols that have special meaning. For example, many languages assign special meaning to keywords such as `for`, `if`, `while`, etc. that are used to define various *control structures* such as conditionals and loops. Special symbols include operators such as `+` and `*` for performing basic arithmetic.

Failure to adhere to the syntax rules of a particular language will lead to bugs and programs that fail to compile and/or run. Natural languages are very forgiving: we can generally discern what someone is trying to say even if they speak in broken English (to a point). However, a compiler or interpreter isn’t as smart as a human. Even a small syntax error will cause a compiler to completely fail to understand the code you have written. Learning a programming language is a lot like learning a new spoken language (but, fortunately a lot easier).

In subsequent parts of this book we focus on particular languages. However, in order to focus on concepts, we’ll avoid specific syntax rules by using *pseudocode*, informal, high-level descriptions of algorithms and processes. Good pseudocode makes use of plain English and mathematical notation, making it more readable and abstract. A small example can be found in Algorithm 1.1.

1.5. Documentation, Comments, and Coding Style

Good code is not just functional, its also beautiful. Good code is organized, easy to read, and well documented. Organization can be achieved by separating code into useful functions and collecting functions into *modules* or libraries. Good organization means that at any one time, we only need to focus on a small part of a program.

It would be difficult to read an essay that contained random line breaks, paragraphs were not indented, it contained different spacing or different fonts, etc. Likewise, code


```

INPUT   : A collection of numbers,  $A = \{a_1, a_2, \dots, a_n\}$ 
OUTPUT : The minimal element in  $A$ 
1 Let  $min$  be equal to  $a_1$ 
2 FOREACH  $element\ a_i\ in\ A$  DO
3     IF  $a_i < min$  THEN
4          $a_i$  is less than the smallest element we've found so far
5         Update  $min$  to be equal to  $a_i$ 
6     END
7 END
8 output  $min$ 

```

Algorithm 1.1: An example of pseudocode: finding a minimum value

should be legible. Well written code is consistent and makes good use of whitespace and indentation. Code in the same code block should be indented at the same level. Nested blocks should be further indented just like the outline of an essay or table of contents.

Code should be well-documented. The code itself should be clear enough that it tells the user *what* the code does and *how* it does it. This is called “self-documenting” code. In addition, well-written code should contain sufficient and clear *comments*. A comment in a program is intended for a human user to read. A comment is ultimately ignored and has no effect on the actual program. Good comments tell the user *why* the code was written or why it was written the way it was. Comments provide a high-level description of what a block of code, function, or program does. If the particular method or algorithm is of interest, it should also be documented.

There are typically two ways to write comments. Single line comments usually begin with two forward slashes, `//`. Everything after the slashes until the next line is ignored by the program. Multiline comments begin with a `/*` and end with a `*/`; everything between them is ignored even if it spans multiple lines. This syntax is shared among many languages including C, Java, PHP and others. Some examples:

1. Introduction

```
1  double x = sqrt(y); //this is a single line comment
2
3  /*
4      This is a multiline comment
5      each line is ignored, but allows
6      for better formatting
7  */
8
9  /**
10     * This is a doc-style comment, usually placed in
11     * front of major portions of code such as a function
12     * to provide documentation
13     * It begins with a forward-slash-star-star
14     */
```

The last example above is a doc-style comment. It originated with Java, but has since been adopted by many other programming languages. Syntactically it is a normal multiline comment, but begins with a `/**`. Asterisks are aligned together on each line. Certain commenting systems allow you to place other marked up data inside these comments such as labeling parameters (`@param x`) or use HTML code to provide links. These doc-style comments are used to provide documentation for major parts of the code especially functions and data structures. Though not part of the language, other documentation tools can be used to gather the information in doc-style comments to produce documentation documents (such as web pages).

Comments should not be trivial: they should not explain something that should be readily apparent to an experienced user or programmer. For example, if a piece of code adds two numbers together and stores the result, there should not be a comment that explains the process. It is a simple and common enough operation that is self-evident. However, if a function uses a particular process or algorithm such as a Fourier Transform to perform an operation, it would be appropriate to document it in a series of comments.

Comments can also detail how a function or piece of code should be used. This is typically done when developing an [Application Programmer Interface \(API\)](#) for use by other programmers. The API's available functions should be well-documented so that users will know how and when to use a particular function. It can document the function's expectations and behavior such as how it handles bad input or error situations.

2. Basics

2.1. Control Flow

The flow of control (or simply control flow) is how a program processes its instructions. Typically, programs operate in a linear or *sequential* flow of control. Executable statements or instructions in a program are performed one after another. In source code, the order that instructions are written defines their order. Just like English, a program is “read” top to bottom. Each statement may modify the *state* of a program. The state of a program is the value of all its variables and other information/data stored in memory at a given moment during its execution. Further, an executable statement may instead invoke (or call or execute) another *procedure* (also called subroutine, function, method, etc.) which is another unit of code that has been encapsulated into one unit so that it can be reused.

This type of control flow is usually associated with a procedural programming paradigm (which is closely related to imperative or structured programming paradigms). Though this text will mostly focus on languages that are procedural (or that have strong procedural aspects), it is important to understand that there are other programming language paradigms. Functional programming languages such as Scheme and Haskell achieve computation through the evaluation of mathematical functions with as little or no (“pure” functional) state at all. Declarative languages such as those used in database languages like SQL or in spreadsheets like Excel specify computation by expressing the logic of computation rather than explicitly specifying control flow. For a more formal introduction to programming language paradigms, a good resource is *Seven Languages in Seven Weeks: A Pragmatic Guide to Learning Programming Languages* by Tate [24].

2.1.1. Flow Charts

Sometimes processes are described using diagrams called [flowcharts](#). A flow chart is a visual representation of an [algorithm](#) or process consisting of boxes or “nodes” connected by directed edges. Boxes can represent an individual step or a decision to be made. The edges establish an *order* of operations in the diagram.

Some boxes represent *decisions* to be made which may have one or more alternate routes (more than one directed edge going out of the box) depending on the the result of the decision. Decision boxes are usually depicted with a diamond shaped box.

2. Basics

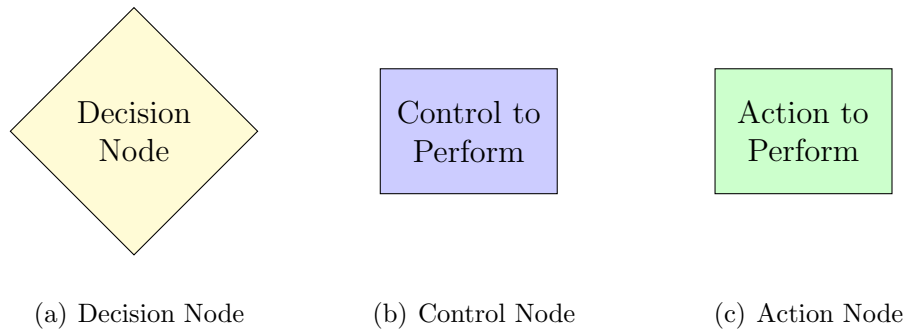


Figure 2.1.: Types of Flowchart Nodes. Control and action nodes are distinguished by color. Control nodes are automated steps while action nodes are steps performed as part of the algorithm being depicted.

Other boxes represent a process, operation, or action to be performed. Boxes representing a process are usually rectangles. We will further distinguish two types of processes using two different colorings: we'll use green to represent boxes that are steps directly related to the algorithm being depicted. We'll use blue for actions that are necessary to the control flow of the algorithm such as assigning a value to a variable or incrementing a value as part of a loop. Figure 2.1 depicts the three types of boxes we'll use. Figure 2.2 depicts a simple ATM (Automated Teller Machine) process as an example.

2.2. Variables

In mathematics, variables are used as placeholders for values that aren't necessarily known. For example, in the equation,

$$x = 3y + 5$$

the variables x and y represent numbers that can take on a number of different values.

Similarly, in a computer program, we also use [variables](#) to store values. A variable is essentially a memory location in which a *value* can be stored. Typically, a variable is referred to by a *name* or [identifier](#) (like x, y, z in mathematics). In mathematics variables are usually used to hold numerical values. However, in programming, variables can usually hold different *types* of values such as numbers, strings (a collection of characters), Booleans (*true* or *false* values), or more complex types such as objects.

2.2.1. Naming Rules & Conventions

Most programming languages have very specific rules as to what you can use as variable identifiers (names). For example, most programming languages do not allow you to use

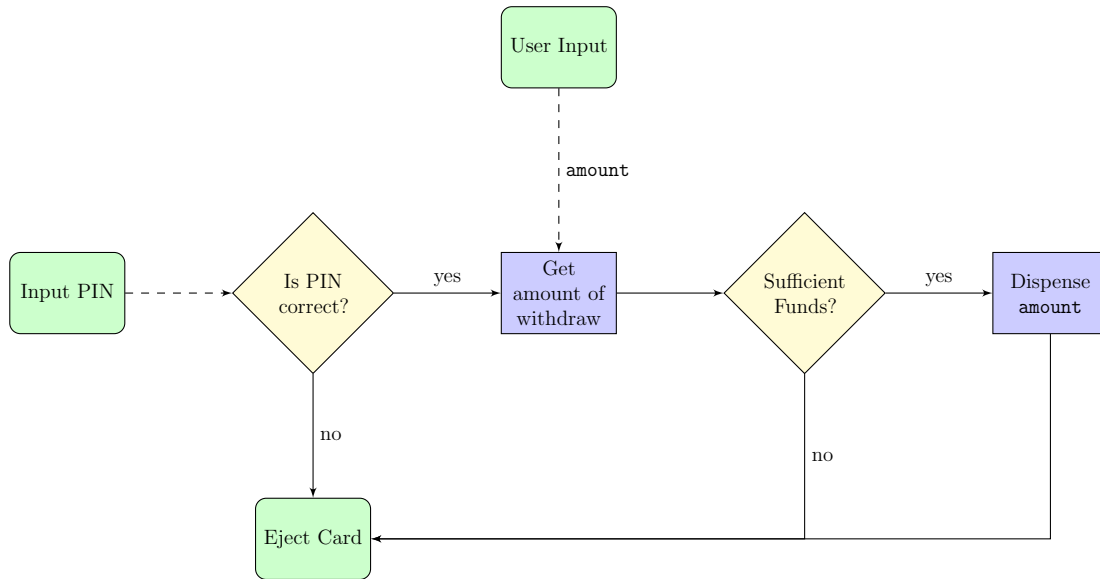


Figure 2.2.: Example of a flow chart for a simple ATM process

whitespace characters (space, tab, etc.) in a variable’s identifier. Allowing spaces would make variable names ambiguous: where does the variable’s name end and the rest of the program continue? How could you tell the difference between “average score” and two separate variables named “average” and “score”? Many programming languages also have *reserved word*—words or terms that are used by the programming language itself and have special meaning. Variable names cannot be the same as any reserved word as the language wouldn’t be able to distinguish between them.

For similar reasons, many programming languages do not allow you to start a variable name with a number as it would make it more difficult to decipher a program. Yet other languages require that variables begin with a specific character (PHP for example *requires* that all variables begin with a dollar sign, `$`).

In general, most programming languages allow you to use upper `[A-Z]` and lowercase `[a-z]` letters as well as numbers, `[0-9]` and certain special characters such as underscores `_` or dollar signs, `$`. Moreover, most programming languages (like English) are *case sensitive* meaning that a variable name using lower case letters is not the same variable as one that uses upper case letters. For example, the variables `x` and `X` are *different*; the variables `average`, `Average` and `AVERAGE` are all different as well. A few languages are *case-insensitive* meaning that they do not recognize differences in lower and upper case letters when used in variable identifiers. Even in these languages, however, using a mixture of lower and upper case letters to refer to the same variable is discouraged: it is difficult to read, inconsistent, and just plain ugly.

Beyond the naming rules that languages may enforce, most languages have established *naming conventions*; a set of guidelines and best-practices for choosing identifier names

2. Basics

for variables (as well as functions, methods, and class names). Conventions may be widely adopted on a per-language basis or may be established within a certain library, framework or by an organization. Naming conventions are intended to give source code consistency which ultimately improves readability and makes it easier to understand. Following a consistent convention can also greatly reduce the chance for errors and mistakes. Good naming conventions also has an aesthetic appeal; code should be beautiful.

There are several general conventions when it comes to variables. An early convention, but still in common use is *underscore casing* in which variable names consisting of more than one word have words separated by underscore characters with all other characters being lower case. For example:

```
average_score , number_of_students , miles_per_hour
```

A variation on this convention is to use all uppercase letters such as `MILES_PER_HOUR`. A more modern convention is to use *lower camel casing* (or just *camel casing*) in which variable names with multiple words are written as one long word with the first letter in each new word capitalized but with the first word's first letter lower case. For example:

```
averageScore , numberOfStudents , milesPerHour
```

The convention refers to the capitalized letters resembling the humps of a camel. One advantage that camel casing has over underscore casing is that you're not always straining to type the underscore character. Yet another similar convention is upper camel casing, also known as *PascalCase*¹ which is like camel casing, but the first letter in the first word is also capitalized:

```
AverageScore , NumberOfStudents , MilesPerHour
```

Each of these conventions is used in various languages in different contexts which we'll explore more fully in subsequent sections (usually underscore lowercasing and camel casing are used to denote variables and functions, PascalCase is used to denote user defined types such as classes or structures, and underscore uppercasing is used to denote static and constant variables). However, for our purposes, we'll use camel casing for variables in our pseudocode.

There are exceptions and special cases to each of these conventions such as when a variable name involves an acronym or a hyphenated word, etc. In such cases sensible extensions or compromises are employed. For example, `xmlString` or `priorityXMLParser` (involving the acronym [Extensible Markup Language \(XML\)](#)) may be used which keep all letters in the acronym consistent (all lower or all uppercase).

In addition to these conventions, there are several best-practice principles when deciding on identifiers.

¹Rarely this is referred to as DromedaryCase; a Dromedary is an Arabian camel.

- Be descriptive, but not verbose – Use variable names that describe what the variable represents. The examples above, `averageScore`, `numberOfStudents`, `milesPerHour` clearly indicate what the variable is intended to represent. Using good, descriptive names makes your code self-documenting (a reader can make sense of it without having to read extensive supplemental documentation).

Avoid meaningless variable names such as `value`, `aVariable`, or some cryptic combination of `v10` (its the 10th variable I’ve used!). Ambiguous variables such as `name` should also be avoided unless the context makes its clear what you are referring to (as when used inside of a `Person` object).

Single character variables are commonly used, but used in a context in which their meaning is clearly understood. For example, variable names such as `x`, `y` are okay if they are used to refer to points in the Euclidean plane. Single character variables such as `i`, `j` are often used as index variables when iterating over arrays. In this case, terseness is valued over descriptiveness as the context is very well-understood.

As a general rule, the more a variable is used, the shorter it should be. For example, the variable `numStudents` may be preferred over the full variable `numberOfStudents`.

- Avoid abbreviations (or at least use them sparingly) – You’re not being charged by the character in your code; you can afford to write out full words. Abbreviations can help to write shorter variable names, but not all abbreviations are the same. The word “abbreviation” itself could be abbreviated as “abbr.”, “abbrev.” or “abbrev.” for example. Abbreviations are not always universally understood by all users, may be ambiguous, or non-standard. Moreover, modern IDEs provide automatic code completion, relieving you of the need to type longer variable names. If the abbreviation is well-known or understood from context, then it may make sense to use it.
- Avoid acronyms (or at least use them sparingly) – Using acronyms in variable names come with many of the same problems as abbreviations. However, if it makes sense in the context of your code and has little chance of being misunderstood or mistaken, then go for it. For example, in the context of a financial application, APR (Annual Percentage Rate) would be a well-understood acronym in which case the variable `apr` may be preferred over the longer `annualPercentageRate`.
- Avoid pluralizations, use singular forms – English is not a very consistent language when it comes to rules like pluralizations. For most cases you simply add “s”; for others you add “es” or change the “y” to “i” and add “es”. Some words are the same form for singular and plural such as “glasses”.² Other words completely different forms forms (“focus” becomes “foci”). Still yet there are instances in which

²These are called *plurale tantum* (nouns with no singular form) and *singular tantum* (nouns with no plural form) for you grammarians. Words like “sheep” are *unchanging irregular plurals*; words whose singular and plural forms are the same.

2. Basics

multiple words are acceptable: the plural of “person” can be “persons” *or* “people”. Avoiding plural forms keeps things simple and consistent: you don’t need to be a grammarian in order easily read code. One potential exception to this is when using a collection such as an array to hold more than one element or the variable represents a quantity that is pluralized (as with `numberOfStudents` above).

Though the guidelines above provide a good framework from which to write good variable names, reasonable people can and do disagree on best practice because at some point as you go from generalities to specifics, conventions become more of a matter of personal preference and subjective aesthetics. Sometimes an organization may establish its own coding standards that must be followed which of course trumps any of the guidelines above.

In the end, a good balance must be struck between readability and consistency. Rules and conventions should be followed, until they get in the way of good code that is.

2.2.2. Types

A variable’s **type** (or *data type*) is the characterization of the data that it represents. As mentioned before, a computer only “speaks” in 0s and 1s (binary). A variable is merely a memory location in which a series of 0s and 1s is stored. That binary string could represent a number (either an integer or a floating point number), a single alphanumeric character or series of characters (string), a boolean type or some other, more complex user-defined type.

The type of a variable is important because it affects how the raw binary data stored at a memory location is interpreted. Moreover, some types take a different amount of memory. For example, an integer type could take 32 **bits** while a floating point type could take 64 **bits**.

Programming languages may support different types and may do so in different ways. In the next few sections we’ll describe some common types that are supported by many languages.

Numeric Types

At their most basic, computers are number crunching machines. Thus, the most basic type of variable that can be used in a computer program is a *numeric type*. There are several numeric types that are supported by various programming languages. The most simple is an *integer* type which can represent whole numbers 0, 1, 2, etc. and their negations, $-1, -2, \dots$. *Floating point* numeric types represent decimal numbers such as 0.5, 3.14, 4.0, etc. However, floating point numbers cannot represent *every* real number possible since they use a finite number of **bits** to represent the number. We will examine this in detail below. For now, let’s understand how a computer represents both integers

and floating point numbers in memory.

As humans, we “think” in base-10 (decimal) because we have 10 fingers and 10 toes.³ When we write a number with multiple digits in base-10 we do so using places (ones place, tens place, hundreds place, etc.). Mathematically, a number in base-10 can be broken down into powers of ten; for example:

$$3,201 = 3 \times 10^3 + 2 \times 10^2 + 0 \times 10^1 + 1 \times 10^0$$

In general, any number in base-10 can be written as the summation of powers of 10 multiplied by numbers 0–9,

$$c_k \times 10^k + c_{k-1} \times 10^{k-1} + \cdots c_1 \cdot 10^1 + c_0$$

In binary, numbers are represented in the same way, but in base-2 in which we only have 0 and 1 as symbols. To illustrate, let’s consider counting from 0: in base-10, we would count 0, 1, 2, . . . , 9 at which point we “carry-over” a 1 to the tens spot and start over at 0 in the ones spot, giving us 10, 11, 12, . . . , 19 and repeat the carry-over to 20.

With only two symbols, the carry-over occurs much more frequently, we count 0, 1 and then carry over and have 10. It is important to understand, this is not “ten”: we are counting in base-2, so 10 is actually equivalent to 2 in base-10. Continuing, we have 11 and again carry over, but we carry it over twice giving us 100 (just like we’d carry over twice when going from 99 to 100 in base-10). A full count from 0 to 16 in binary can be found in Table 2.1. In many programming languages, a prefix of 0b is used to denote a number represented in binary. We use this convention in the table.

Base-10	Binary
0	0b0
1	0b1
2	0b10
3	0b11
4	0b100
5	0b101
6	0b110
7	0b111
8	0b1000
9	0b1001
10	0b1010
11	0b1011
12	0b1100
13	0b1101
14	0b1110
15	0b1111
16	0b10000

As a fuller example, consider again the number 3,201. This can be represented in binary as follows.

Table 2.1.: Counting in Binary

$$\begin{aligned}
 0b110010000001 &= 1 \times 2^{11} + 1 \times 2^{10} + 0 \times 2^9 + 0 \times 2^8 + \\
 &\quad 1 \times 2^7 + 0 \times 2^6 + 0 \times 2^5 + 0 \times 2^4 + \\
 &\quad 0 \times 2^3 + 0 \times 2^2 + 0 \times 2^1 + 1 \times 2^0 \\
 &= 2^{11} + 2^{10} + 2^7 + 2^0 \\
 &= 2,048 + 1,024 + 128 + 1 \\
 &= 3,201
 \end{aligned}$$

³At least, the most fortunate among us.

2. Basics

Representing negative numbers is a bit more complicated and is usually done using a scheme called [two's complement](#). We omit the details for now, but essentially the first bit in the representation serves as a *sign bit*: zero indicates positive, while 1 indicates negative. Negative values are represented as a complement with respect to 2^n (a complement is where 0s and 1s are “flipped” to 1s and 0s).

When represented using Two's Complement, binary numbers with n bits can represent numbers x in the range

$$-2^{n-1} \leq x \leq 2^{n-1} - 1$$

Note that the upper bound follows from the fact that

$$\underbrace{0b\ 11 \dots 11}_{n \text{ bits}} = \sum_{i=0}^{n-1} 2^i = 2^n - 1$$

Which captures the idea that we start at zero. The lower bound represents the idea that we have 2^{n-1} possible values ($n - 1$ since we need one bit for the sign bit) and we don't need to start at zero, we can start at -1 . Table 2.2 contains ranges for common integer types using various number of bits.

n (number of bits)	minimum	maximum
8	-128	127
16	-32,768	32,767
32	-2,147,483,648	2,147,483,647
64	-9,223,372,036,854,775,808	9,223,372,036,854,775,807
128	$\approx -3.4028 \times 10^{38}$	$\approx 3.4028 \times 10^{38}$

Table 2.2.: Ranges for various signed integer types

Some programming languages allow you to define variables that are *unsigned* in which the sign bit is not used to indicate positive/negative. With the extra bit we can represent numbers twice as big; using n bits we can represent numbers x in the range

$$0 \leq x \leq 2^n - 1$$

Floating point numbers in binary are represented in a manner similar to scientific notation. Recall that in scientific notation, a number is *normalized* by multiplying it by some power of 10 so that its most significant digit is between 1 and 9. The resulting normalized number is called the *significand* while the power of ten that the number was scaled by is called the *exponent* (and since we are base-10, 10 is the *base*). In general, a number in scientific notation is represented as:

$$\text{significand} \times \text{base}^{\text{exponent}}$$

For example,

$$14326.123 = \underbrace{1.4326123}_{\text{significand}} \times \underbrace{10^4}_{\substack{\text{exponent} \\ \text{base}}}$$

Equivalently, sometimes the notations $1.4326123e+4$, $1.4326123e4$ or $1.4326123E4$ are used. As before, we can see that a fractional number in base-10 can be seen as a summation of powers of 10:

$$\begin{aligned} 1.4326123 &= 1 \times 10^1 + 4 \times 10^{-1} + 3 \times 10^{-2} + 2 \times 10^{-3} + \\ &\quad 6 \times 10^{-4} + 1 \times 10^{-5} + 2 \times 10^{-6} + 3 \times 10^{-7} \end{aligned}$$

In binary, floating point numbers are represented in a similar way, but the base is 2, consequently a fractional number in binary is a summation of powers of 2. For example,

$$\begin{aligned} 110.011 &= 1 \times 2^2 + 1 \times 2^1 + 0 \times 2^0 + 0 \times 2^{-1} + 1 \times 2^{-2} + 1 \times 2^{-3} \\ &= 1 \times 4 + 1 \times 2 + 0 \times 1 + 0 \times \frac{1}{2} + 1 \times \frac{1}{4} + 1 \times \frac{1}{8} \\ &= 4 + 2 + 0 + 0 + \frac{1}{4} + \frac{1}{8} \\ &= 6.375 \end{aligned}$$

In binary, the significand is often referred to as a [mantissa](#). We also normalize a binary floating point number so that the mantissa is between $\frac{1}{2}$ and 1. This is where the term *floating point* comes from: the decimal point (more generally called a *radix point*) “floats” left and right to ensure that the number is always normalized. The example above would normalized to

$$0.110011 \times 2^3$$

Here, 0.110011 is the mantissa and 3 is the exponent (which in binary would be 0b11).

Most modern programming languages implement floating point numbers according to the [Institute of Electrical and Electronics Engineers \(IEEE\)](#) 754 Standard [16] (also called the [International Electrotechnical Commission \(IEC\)](#) 60559 [15]). When represented in binary, the total number of bits must be used to represent the sign, mantissa and exponent. The standard defines several precisions that each use a fixed number of bits with a resulting number of significant digits (base-10) of precision. Table 2.3 contains a summary of a few of the most commonly implemented precisions.

Just as with integers, the finite precision of floating-point numbers results in several limitations. First, irrational numbers such as $\pi = 3.14159\dots$ can only be approximated out to a certain number of digits. For example, with single precision $\pi \approx 3.1415927$ which is accurate only to the 6th decimal place and with double precision, $\pi \approx 3.1415926535897931$ approximate to only 15 decimal places.⁴ In fact, *regardless* of how many bits we allow in

⁴The first 80 digits of π are

3.14159265358979323846264338327950288419716939937510582097494459230781640628620899

though only 39 digits of π are required to accurately calculate the volume of the known universe to within one atom.

2. Basics

Name	Bits	Exponent Bits	Mantissa Bits	Significant Digits of Precision	Approximate Range
Half	16	5	10	≈ 3.3	$10^3 \sim 10^{4.5}$
Single	32	8	23	≈ 7.2	$10^{-38} \sim 10^{38}$
Double	64	11	52	≈ 15.9	$10^{-308} \sim 10^{308}$
Quadruple	128	15	112	≈ 34.0	$10^{-4931} \sim 10^{4931}$

Table 2.3.: Summary of Floating-point Precisions in the IEEE 754 Standard. Half and quadruple are not widely adopted.

our representation, an irrational number like π (that never repeats and never terminates) will only ever be an approximation. Real numbers like π require an infinite precision, but computers are only finite machines.

Even numbers that have a finite representation (rational numbers) such as $\frac{1}{3} = 0.\overline{333}$ are not represented exactly when using floating-point numbers. In double precision binary,

$$\frac{1}{3} = 0b1.01 \times 2^{-2}$$

which when represented in scientific notation in decimal is

$$3.3333333333333330 \times 10^{-1}$$

That is, there are only 16 digits of precision, after which the remaining (infinite) sequence of 3s get cut off.

Programming languages usually only support the common single and double precisions defined by the [IEEE 754](#) standard as those are commonly supported by hardware. However, there are languages that support arbitrary precision (also called multiprecision) numbers and yet other languages that have many libraries to support “big number” arithmetic. Arbitrary precision is still not infinite: instead, as more digits are needed, more memory is allocated. If you want to compute 10 more digits of π , you can but at a cost. To support the additional digits, more memory is allocated. Also, operations are performed in software using many operations which can be much slower than performing fixed-precision arithmetic directly in hardware. Still, there are many applications where such accuracy or large numbers are absolutely essential.

Characters & Strings

Another type of data is textual data which can either be single characters or a sequence of characters which are called [strings](#). Strings are sometimes used for human readable data such as messages or output, but may model general data. For example, DNA is usually encoded using strings consisting of C, G, A, T (corresponding to the nucleases cytosine, guanine, adenine, and thymine). Numerical characters and punctuation can

also be used in strings in which case they do not represent numbers, but instead may represent textual versions of numerical data.

Different programming languages implement characters and strings in different ways (or may even treat them the same). Some languages implement strings by defining *arrays* of characters. Other languages may treat strings as dynamic data types. However, all languages use some form of *character encoding* to represent strings. Recall that computers only speak in binary: 0s and 1s. To represent a character like the capital letter “A”, the binary sequence 0b1000001 is used. In fact, the most common alphanumeric characters are encoded according to the [American Standard Code for Information Interchange \(ASCII\)](#) text standard. The basic ASCII text standard assigns characters to the decimal values 0–127 using 7 bits to *encode* each character as a number. Table 2.4 contains a complete listing of standard ASCII character set.

The ASCII table was designed to enforce a lexicographic ordering: letters are in alphabetic order, uppercase precede lowercase versions, and number precede both. This design allows for an easy and natural comparison among strings, “alpha” would come before “beta” because they differ in the first letter. The characters have numerical values 97 and 98 respectively; since $97 < 98$, the order follows. Likewise, “Alpha” would come before “alpha” (since $65 < 97$), and “alpha” would come before “alphanumeric”: the sixth character is empty in the first string (usually treated as the null character with value 0) while it is “n” in the second (value of 110). This is the ordering that we would expect in a dictionary.

There are several other nice design features built into the ASCII table. For example, to convert from upper to lower case versions, you only need to “flip” the second bit (0 for uppercase, 1 for lowercase). There are also several characters that need to be *escaped* to be defined. For example, though your keyboard has a tab and an enter key, if you wanted to code those characters, you would need to specify them in some way other than those keys (since typing those keys will affect what you are typing rather than specifying a character). The standard way to escape characters is to use a backslash along with another, single character. The three most common are the (horizontal) tab, `\t`, the endline character, `\n`, and the null terminating character, `\0`. The tab and endline character are used to specify their whitespace characters respectively. The null character is used in some languages to denote the *end* of a string and is not printable.

ASCII is quite old, originally developed in the early sixties. President Johnson first mandated that all computers purchased by the federal government support ASCII in 1968. However, it is quite limited with only 128 possible characters. Since then, additional extensions have been developed. The Extended ASCII character set adds support for 128 additional characters (numbered 128 through 255) by adding 1 more bit (8 total). Included in the extension are support for common international characters with diacritics such as ü, ñ and £ (which are characters 129, 164, and 156 respectively).

Even 256 possible characters are not enough to represent the wide array of international characters when you consider languages like Chinese, Japanese, and Korean (CJK for

2. Basics

Binary	Dec	Character	Binary	Dec	Character	Binary	Dec	Character
0b000 0000	0	\0 Null character	0b010 1011	43	+	0b101 0110	86	V
0b000 0001	1	Start of Header	0b010 1100	44	,	0b101 0111	87	W
0b000 0010	2	Start of Text	0b010 1101	45	-	0b101 1000	88	X
0b000 0011	3	End of Text	0b010 1110	46	.	0b101 1001	89	Y
0b000 0100	4	End of Transmission	0b010 1111	47	/	0b101 1010	90	Z
0b000 0101	5	Enquiry	0b011 0000	48	0	0b101 1011	91	[
0b000 0110	6	Acknowledgment	0b011 0001	49	1	0b101 1100	92	\
0b000 0111	7	\a Bell	0b011 0010	50	2	0b101 1101	93]
0b000 1000	8	\b Backspace	0b011 0011	51	3	0b101 1110	94	^
0b000 1001	9	\t Horizontal Tab	0b011 0100	52	4	0b101 1111	95	_
0b000 1010	10	\n Line feed	0b011 0101	53	5	0b110 0000	96	`
0b000 1011	11	\v Vertical Tab	0b011 0110	54	6	0b110 0001	97	a
0b000 1100	12	\f Form feed	0b011 0111	55	7	0b110 0010	98	b
0b000 1101	13	\r Carriage return	0b011 1000	56	8	0b110 0011	99	c
0b000 1110	14	Shift Out	0b011 1001	57	9	0b110 0100	100	d
0b000 1111	15	Shift In	0b011 1010	58	:	0b110 0101	101	e
0b001 0000	16	Data Link Escape	0b011 1011	59	;	0b110 0110	102	f
0b001 0001	17	Device Control 1	0b011 1100	60	<	0b110 0111	103	g
0b001 0010	18	Device Control 2	0b011 1101	61	=	0b110 1000	104	h
0b001 0011	19	Device Control 3	0b011 1110	62	>	0b110 1001	105	i
0b001 0100	20	Device Control 4	0b011 1111	63	?	0b110 1010	106	j
0b001 0101	21	Negative Ack	0b100 0000	64	@	0b110 1011	107	k
0b001 0110	22	Synchronous idle	0b100 0001	65	A	0b110 1100	108	l
0b001 0111	23	End of Trans. Block	0b100 0010	66	B	0b110 1101	109	m
0b001 1000	24	Cancel	0b100 0011	67	C	0b110 1110	110	n
0b001 1001	25	End of Medium	0b100 0100	68	D	0b110 1111	111	o
0b001 1010	26	Substitute	0b100 0101	69	E	0b111 0000	112	p
0b001 1011	27	Escape	0b100 0110	70	F	0b111 0001	113	q
0b001 1100	28	File Separator	0b100 0111	71	G	0b111 0010	114	r
0b001 1101	29	Group Separator	0b100 1000	72	H	0b111 0011	115	s
0b001 1110	30	Record Separator	0b100 1001	73	I	0b111 0100	116	t
0b001 1111	31	Unit Separator	0b100 1010	74	J	0b111 0101	117	u
0b010 0000	32	(space)	0b100 1011	75	K	0b111 0110	118	v
0b010 0001	33	!	0b100 1100	76	L	0b111 0111	119	w
0b010 0010	34	"	0b100 1101	77	M	0b111 1000	120	x
0b010 0011	35	#	0b100 1110	78	N	0b111 1001	121	y
0b010 0100	36	\$	0b100 1111	79	O	0b111 1010	122	z
0b010 0101	37	%	0b101 0000	80	P	0b111 1011	123	{
0b010 0110	38	&	0b101 0001	81	Q	0b111 1100	124	
0b010 0111	39	'	0b101 0010	82	R	0b111 1101	125	}
0b010 1000	40	(0b101 0011	83	S	0b111 1110	126	~
0b010 1001	41)	0b101 0100	84	T	0b111 1111	127	Delete
0b010 1010	42	*	0b101 0101	85	U			

Table 2.4.: ASCII Character Table. The first and second column indicate the binary and decimal representation respectively. The third column visualizes the resulting character when possible. Characters 0–31 and 127 are control characters that are not printable or print whitespace. The encoding is designed to impose a lexicographic ordering: A–Z are in order, uppercase letters precede lowercase letters, numbers precede letters and are also in order.

short). Unicode was developed to solve this problem by establishing a standard encoding that supports 1,112,064 possible characters, though only a fraction of these are actually currently assigned.⁵ Unicode is *backward compatible*, so it works with plain ASCII characters. In fact, the most common encoding for Unicode, UTF-8 uses a *variable* number of bytes to encode characters. 1-byte encodings correspond to plain ASCII, there are also 2, 3, and 4-byte encodings.

In most programming languages, strings *literals* are defined by using either single or double quotes to *delimit* where the string begins and ends. For example, one may be able to define the string `"Hello World"`: the double quotes are *not* part of the string, but instead specify where the string begins and ends. Some languages allow you to use *either* single or double quotes. PHP for example would allow you to also define the same string as `'Hello World'`. Yet other languages, such as C distinguish the usage of single and double quotes: single quotes are for single characters such as `'A'` or `'\n'` while double quotes are used for full strings such as `"Hello World"`.

In any case, if you want a single or double quote to appear in your string you need to escape it similar to how the tab and endline characters are escaped. For example, in C `'\''` would refer to the single quote character and `"Dwayne \"The Rock\" Johnson"` would allow you to use double quotes within a string. In our pseudocode we'll use the stylized double quotes, “Hello World” in any strings that we define. We will examine string types more fully in Chapter 8.

Boolean Types

A *Boolean* is another type of variable that is used to hold a truth value, either *true* or *false*, of a logical statement. Some programming languages explicitly support a built-in Boolean type while others implicitly support them. For languages that have explicit types, typically the keywords `true` and `false` are used, but logical expressions can also be evaluated and assigned to Boolean variables.

Some languages do not have an explicit Boolean type and instead support Booleans implicitly, sometimes by using numeric types. For example, in C, *false* is associated with zero while *any* non-zero value is associated with *true*. In either case, Boolean values are used to make decisions and control the flow of operations in a program (see Chapter 3).

Object & Reference Types

Not everything is a number or string. Often, we wish to model real-world entities such as people, locations, accounts, or even interactions such as exchanges or transactions.

⁵As of 2012, 110,182 are assigned to characters, 137,468 are reserved for private use (they are valid characters, but not defined so that organizations can use them for their own purposes), with 2,048 surrogates and 66 non-character control codes. 864,348 are left unassigned meaning that we are well-prepared for encoding alien languages when they finally get here.

2. Basics

Most programming languages allow you to create *user-defined types* by using objects or structures. Objects and structures allow you to group multiple pieces of data together into one logical entity; this is known as [encapsulation](#). For example, a Student object may consist of a first-name, last-name, GPA, year, major, etc. Grouping these separate pieces of data together allows us to define a more complex type. We explore these concepts in more depth in Chapter 10.

In contrast to the built-in numeric, character/string, and Boolean types (also called [primitive](#) data types) user-defined types do not necessarily take a fixed amount of memory to represent. Since they are user-defined, it is up to the programmer to specify how they get created and how they are represented in memory. A variable that refers to an object or structure is usually [references](#) or [pointers](#): a reference to where the object is stored in memory on a computer.

Many programming languages use the keyword `null` (or sometimes `NULL` or a some variation) to indicate an invalid reference. The `null` keyword is often used to refer to uninitialized or “missing” data.

Another common user-defined type is an *enumerated* type which allows a user to define a *list* of keywords associated with integers. For example, the cardinal directions, “north”, “south”, “east”, and “west” could be associated with the integers 0, 1, 2, 3 respectively. Defining an enumerated type then allows you to use these keywords in your program directly without having to rely on mysterious numerical values, making a program more readable and less prone to error.

2.2.3. Declaring Variables: Dynamic vs. Static Typing

In some languages, variables must be declared before they can be referred to or used. When you declare a variable, you not only give it an identifier, but also define its type. For example, you can declare a variable named *numberOfStudents* and define it to be an integer. For the life of that variable, it will *always* be an integer type. You can only give that variable integer values. Attempts to assign, say, a string type to an integer variable may either result in a syntax error or a runtime error when the program is executed or lead to unexpected or undefined behavior. A language that requires you to declare a variable and its type is a [statically typed](#) language.

The declaration of a variable is typically achieved by writing a statement that includes the variable’s type (using a built-in keyword of the language) along with the variable name. For example, in C-style languages, a line like

```
int x;
```

would create an integer variable associated with the identifier `x`.

In other languages, typically *interpreted* languages, you do *not* have to declare a variable before using it. Such languages are generally referred to as [dynamically typed](#) languages.

Instead of declaring a variable to have a particular type, the type of a variable is determined by the type of value that is assigned to it. If you assign an integer to a variable it becomes an integer. If you assign a string to it, it becomes a string type. Moreover, a variable's type can *change* during the execution of a program. If you reassign a value to a variable, it dynamically changes its type to match the type of the value assigned.

In PHP for example, a line like

```
$x = 10;
```

would create an integer variable associated with the identifier `$x`. In this example, we did not declare that `$x` was an integer. Instead, it was inferred by the value that we assigned to it (10).

At first glance it may seem that dynamically typed languages are better. Certainly they are more flexible (and allow you to write less so-called “boilerplate” code), but that flexibility comes at a cost. Dynamically typed variables are generally less efficient. Moreover, dynamic typing opens the door to a lot of potential type mismatching errors. For example, you may have a variable that is assumed to *always* be an integer. In a dynamically typed language, no such assumption is valid as any reassignment can change the variable's type. It is impossible to enforce this rule by the language itself and may require a lot of extra code to check a variable's type and deal with “type safety” issues. The advantages and disadvantages of each continue to be debated.

2.2.4. Scoping

The [scope](#) of a variable is the section of code in which a variable is valid or “known.” In a statically typed language, a variable must be declared before it can be used. The code block in which the variable is declared is therefore its scope. Outside of this code block, the variable is invalid. Attempts to reference or use a variable that is out-of-scope typically result in a syntax error. An example using the C programming language is depicted in Code Sample [2.1](#).

Scoping in a dynamically typed language is similar, but since you don't declare a variable, the scope is usually defined by the block of code where you first use or reference the variable. Moreover, in some languages using a variable may cause that variable to become *globally* scoped.

A [globally scoped](#) variable is valid throughout the entirety of a program. A global variable can be accessed and referenced on every line of code. Sometimes this is a good thing: for example, we could define a variable to represent π and then use it anywhere in our program. We would then be assured that every computation involving π would be using the same definition of π (rather than one line of coding using the estimate 3.14 while another uses 3.14159).

2. Basics

```
1 {  
2   int a;  
3   {  
4     //this is a new code block inside the outer block  
5     int b;  
6     //at this point in the code, both a and b are in-scope  
7   }  
8   //at this point, only a is in-scope, b is out-of-scope  
9 }
```

Code Sample 2.1: Example of variable scoping in C

On the same token, however, global variables make the state and execution of a program less predictable: if any piece of code can access a global variable, then potentially any piece of code could *change* that variable. Imagine some questionable code changing the value of our global π variable to 3. For this reason, using global variables are generally considered bad practice.⁶ Even if no code performs such an egregious operation, the fact that anything *can* change the value means that when testing, you must test for the potential that anything *will* change the value, greatly increasing the complexity of software testing.

To capture the advantages of a global variable while avoiding the disadvantages, it is common to only allow global *constants*; variables whose values cannot be changed once set.

Another argument against globally scoped variables is that once the identifier has been used, it cannot be reused or redefined for other purposes (a floating-point variable with the identifier `pi` means we cannot use the identifier `pi` for any other purpose) as it would lead to conflicts. Defining many globally scoped variables (or functions, or other elements) starts to *pollute the namespace* by reserving more and more identifiers. Problems arise when one attempts to use multiple libraries that have both used the same identifiers for different variables or functions. Resolving the conflict can be difficult or impossible if you have no control over the offending libraries.

2.3. Operators

Now that we have variables, we need a way to work with variables. That is, given two variables we may wish to add them together. Or we may wish to take two strings and combine them to form a new string. In programming languages this is accomplished through **operators** which operate on one or more **operands**. An operator takes the values

⁶Coders often say “globals are evil” and indeed have often demonstrated that they have low moral standards. Global variables that is. Coders are above reproach.

of its operands and combines them or changes them in some way to produce a new value. If an operator is applied to variable(s), then the values used in the operation are the values stored in the variable at the time that the operator is evaluated.

Many common operators are *binary* in that they operate on two operands such as common arithmetic operations like addition and multiplication. Some operators are *unary* in that they only operate on one variable. The first operator that we look at is a unary operator and allows us to assign values to variables.

2.3.1. Assignment Operators

The [assignment operator](#) is a unary operator that allows you to take a value and *assign* it to a variable. The assignment operator usually takes the following form: the value is placed on the right-hand-side of the operator while the variable to which we are assigning the value is placed on the left-hand-side of the operator. For our pseudocode, we'll use a generic “left-arrow” notation:

$$a \leftarrow 10$$

which should be read as “place the value 10 into the variable *a*.” Many C-style programming languages commonly use the single equals sign for the assignment operator. The example above might be written as

```
a = 10;
```

It is important to realize that when this notation is used, it is not a declaration like it would be in algebra: $a = b$ for example is an algebraic assertion that the variables *a* and *b* are equal. An assignment operator is different: it means place the value on the right-hand-side into the variable on the left-hand-side. For that reason, writing something like

```
10 = a;
```

is invalid syntax. The left-hand-side *must* be a variable.

The right-hand-side, however, may be a [literal](#), another variable, or even a more complex [expression](#). In the example before,

$$a \leftarrow 10$$

the value 10 was acting as a numerical literal: a way of expressing a (human-readable) value that the computer can then interpret as a binary value. In code, we can conveniently write numbers in base-10; when compiled or interpreted, the numerical literals are converted into binary data that the computer understands and placed in a memory location corresponding to the variable. This entire process is automatic and transparent to the user. Literals can also be strings or other values. For example:

$$message \leftarrow \text{“hello world”}$$

2. Basics

We can also “copy” values from one variable to another. Assuming that we’ve assigned the value 10 to the variable a , we can then copy it to another variable b :

$$b \leftarrow a$$

This does not mean that a and b are the same variable. The value that is stored in the variable a at the time that this statement is executed is *copied* into the variable b . There are now *two* different variables with the same value. If we reassign the value in a , the value in b is unaffected. This is illustrated in Algorithm 2.1

```
1  $a \leftarrow 10$ 
2  $b \leftarrow a$ 
   //  $a$  and  $b$  both store the value 10 at this point
3  $a \leftarrow 20$ 
   // now  $a$  has the value 20, but  $b$  still has the value 10
4  $b \leftarrow 25$ 
   //  $a$  still stores a value of 20,  $b$  now has a value of 25
```

Algorithm 2.1: Assignment Operator Demonstration

The right-hand-side can also be a more complex expression, for example the result of summing two numbers together.

2.3.2. Numerical Operators

Numerical operators allow you to create complex expressions involving either numerical literals and/or numerical variables. For most numerical operators, it doesn’t matter if the operands are integers or floating-point numbers. Integers can be added to floating-point numbers without much additional code for example.

The most basic numerical operator is the unary negation operator. It allows you to negate a numerical literal or variable. For example,

$$a \leftarrow -10$$

or

$$a \leftarrow -b$$

The usage of a negation is so common that it is often not perceived to be an operator but it is.

Addition & Subtraction

You can also add (sum) two numbers using the $+$ (plus) operator and subtract using the $-$ (minus) operator in a straightforward way. Note that most languages can distinguish

the minus operator and the negation operator by how you use it just like a mathematical expression. If applied to one operand, it is interpreted as a negation operator. If applied to two operands, it represents subtraction. Some examples can be found in Algorithm 2.2.

```

1  $a \leftarrow 10$ 
2  $b \leftarrow 20$ 
3  $c \leftarrow a + b$ 
4  $d \leftarrow a - b$ 
   //  $c$  has the value 30 while  $d$  has the value -10
5  $c \leftarrow a + 10$ 
6  $d \leftarrow -d$ 
   //  $c$  now has the value 20 and  $d$  now has the value 10

```

Algorithm 2.2: Addition and Subtraction Demonstration

Multiplication & Division

You can also multiply and divide literals and variables. In mathematical expressions multiplication is represented as $a \times b$ or $a \cdot b$ or simply just ab and division is represented as $a \div b$ or a/b or $\frac{a}{b}$. In our pseudocode, we'll generally use $a \cdot b$ and $\frac{a}{b}$, but in programming languages it is difficult to write these some of these symbols. Usually programming languages use `*` for multiplication and `/` for division. Similar examples are provided in Algorithm 2.3.

```

1  $a \leftarrow 10$ 
2  $b \leftarrow 20$ 
3  $c \leftarrow a \cdot b$ 
4  $d \leftarrow \frac{a}{b}$ 
   //  $c$  has the value 200 while  $d$  has the value 0.5

```

Algorithm 2.3: Multiplication and Division Demonstration

Careful! Some languages specify that the result of an arithmetic operation on variables of a certain type *must* match. That is, an integer plus an integer results in an integer. A floating-point number divided by a floating-point number results a floating-point number. When we mix types, say an integer and a floating-point number, the result is generally a floating-point number. For the most part this is straightforward. The one tricky case is when we have an integer divided by another integer, $3/2$ for example.

Since both operands are integers, the result must be an integer. Normally, $3/2 = 1.5$, but since the result must be an integer, the fractional part gets **truncated** (cut-off) and

2. Basics

only the integral part is kept for the final result. This can lead to weird results such as $1/3 = 0$ and $99/100 = 0$. The result is *not* rounded down or up; instead the fractional part is completely thrown out. Care must be taken when dividing integer variables in a statically typed language. [Type casting](#) can be used to force variables to change their type for the purposes of certain operations so that the full answer is preserved. For example, in C we can write

```
1  int a = 10;
2  int b = 20;
3  double c;
4  int d;
5  c = (double) a / (double) b;
6  d = a / b;
7  //the value in c is correctly 0.5 but the value in d is 0
```

Integer Division

Recall that in arithmetic, when you divide integers a/b , b might not go into a evenly in which case you get a remainder. For example, $13/5 = 2$ with a remainder $r = 3$. More generally we have that

$$a = qb + r$$

Where a is the *dividend*, b is the *divisor*, q is the *quotient* (the result) and r is the *remainder*. We can also perform *integer division* in most programming languages. In particular, the integer division operator is the operator that gives us the *remainder* of the integer division operation in a/b . In mathematics this is the *modulo* operator and is denoted

$$a \bmod b$$

For example,

$$13 \bmod 5 = 3$$

It is possible that the remainder is zero, for example,

$$10 \bmod 5 = 0$$

Many programming languages support this operation using the percent sign. In C for example,

```
c = a % b;
```

2.3.3. String Concatenation

Strings can also be combined to form new strings. In fact, strings can also be combined with non-string variables to form new strings. You would typically do this in order to

convert a numerical value to a string representation so that it can be output to the user or to a file for longterm storage. The operation of combining strings is referred to as [string concatenation](#). Some languages support this through the same plus operator that is used with addition. For example,

$$message \leftarrow \text{“hello ”} + \text{“world!”}$$

which combines the two strings to form one string containing the characters “hello world!”, storing the value into the *message* variable. For our pseudocode we’ll adopt the plus operator for string concatenation.

The string concatenation operator can also sometimes be combined with non-string types; numerical types for example. This allows you to easily convert numbers to a human-readable, base-10 format so that they can be printed to the output. For example suppose that the variable *b* contains the value 20, then

$$message \leftarrow \text{“the answer is”} + b$$

might result in the string “the answer is 20” being stored in the variable *message*.

Other languages use different symbols to distinguish concatenation and addition. Still yet other languages do not directly support an operator for string concatenation which must instead be done using a function.

2.3.4. Order of Precedence

In mathematics, when you write an expression such as:

$$a + b \cdot c$$

you interpret it as “multiply *b* and *c* and then add *a*.” This is because multiplication has a higher [order of precedence](#) than addition. The order of precedence (sometimes referred to as *order of operations*) is a set of rules which define the order in which operations should be evaluated. In this case, multiplication is performed before addition. If, instead, we had written

$$(a + b) \cdot c$$

we would have a different interpretation: “add *a* and *b* and then multiply the result by *c*.” That is, the inclusion of parentheses *changes* the order in which we evaluate the operations. Adding parentheses can have no effect (if we wrote $a + (bc)$ for example), or it can cause operations with a lower order of precedence to be evaluated first as in the example above.

Numerical operators are no different when used in most programming languages. The same order of precedence is used and parentheses can be used to change the order of evaluation.

2.3.5. Common Numerical Errors

When dealing with numeric types it's important to know and understand their limitations. In mathematics, the following operations might be considered “invalid”

- Division by zero: $\frac{a}{b}$ where $b = 0$. This is an undefined operation in mathematics and also in programming languages. Depending on the language, any number of things may happen. It may be a fatal error or *exception*; the program may continue executing but give “garbage” results from then on; the result may be a special value such as null, “NaN” (not-a-number) or “INF” (a special representation of infinity). It is best to avoid such an operation entirely using conditional statements and [defensive programming](#) (see Chapter 3)
- Other potentially invalid operations involve common mathematical functions. For example, $\sqrt{-1}$ would be a complex result, i which some languages do support. However, many do not. Similarly, the natural logarithm of zero and negative values is undefined. In either case you could expect a result like “NaN” or “INF”.
- Still other operations seem like they should be valid, but because of how numbers are represented in binary, the results are invalid. Recall that for a 32-bit signed, two's complement number, the maximum representable value is 2,147,483,647. Suppose this maximum value is stored in a variable, b . Now suppose we attempt to add one more,

$$c \leftarrow b + 1$$

Mathematically we'd expect the result to be 2,147,483,648, but that is more than the maximum representable integer. What happens is something called [arithmetic overflow](#). The actual number stored in binary in memory for 2,147,483,647 is

$$0b0 \underbrace{11 \dots 11}_{31 \text{ 1s}}$$

When we add 1 to this, it is carried over all the way to the 32nd bit, giving the result

$$0b1 \underbrace{00 \dots 00}_{31 \text{ 0s}}$$

in binary. However, the 32nd bit is the sign bit, so this is a negative number. In particular, if this is a two's complement integer, it has the decimal value $-2,147,483,648$ which is obviously wrong. Another example would be if we have a “large number, say 2 billion and attempt to double it (multiply by 2). We would expect 4 billion as a result, but again overflow occurs and the result (using 32-bit signed two's complement integers) is $-294,967,296$. do support functions.

- A similar phenomenon can happen with floating point numbers. If an operation (say multiplying two “small” numbers together) results in a number that is smaller than the smallest floating-point number that can be represented, the result is said to have resulted in [underflow](#). The result can essentially be zero, or an error can

be raised to indicate that underflow has occurred. The consequences of underflow can be very complex.

- Floating-point operations can also result in a loss of precision even if no overflow or underflow occurs. For example, when adding a very large number a and a very small number b , the result might be no different from the value of a . This is because (for example) double precision floating-point numbers only have about 16 significant digits of precision with the least significant digits being cutoff in order to preserve the magnitude.

As another example, suppose we compute $\sqrt{2} = 1.41421356\dots$. If we squared the result, mathematically we would expect to get 2. However, since we only have a certain number of digits of precision, squaring the result in a computer may result in a value slightly different from 2 (either 1.9999998 or 2.0000001).

2.3.6. Other Operators

Many programming languages support other “convenience” operators that allow you to perform common operations using less code. These operators are generally [syntactic sugar](#) the don’t add any functionality (the same operation could be achieved using other operators), but they add simpler or more terse syntax for doing so.

Increment Operators

Adding or subtracting one to a variable is a very common operation. So common, that most programming languages define increment operators such as `i++` and `i--` which add one and subtract one from the variables applied. The same effect could be achieved by writing

$$i \leftarrow (i + 1) \quad \text{and} \quad i \leftarrow (i - 1)$$

but the increment operators provide a shorthand way of expressing the operation.

The operators `i++` and `i--` are *postfix* operators: the operator is written *after* (post) the operand. Some languages define similar *prefix* increment operators, `++i` and `--i`. The effect is similar: each adds or subtracts one from the variable `i`. However, the difference is when the operator is used in a larger expression. A postfix operator *retains* the original value for the expression, a prefix operator takes on the new, incremented value in the expression.

To illustrate, suppose the variable `i` has the value 10. In the following line of code, `i` is incremented and used in an expression that adds 5 and stores the result in a variable `x`:

```
x = 5 + (i++);
```

The value of `x` after this code is 15 while the value of `i` is now 11. This is because the postfix operator increments `i`, but `i++` retains the value 10 in the expression. In

2. Basics

contrast, with the line

```
x = 5 + (++i);
```

the variable `i` again now has the value 11, but the value of `x` is 16 since `++i` takes on the new, incremented value of 11.

Appropriately using each can lead to some very concise code, but it is important to remember the difference.

Compound Assignment Operators

If we want to increment or decrement a variable by an amount other than 1 we can do so using *compound assignment* operators that combine an arithmetic operator and an assignment operator into one. For example, `a += 10` would add 10 to the variable `a`. The same could be achieved by coding `a = a + 10`, but the former is a bit shorter as we don't have to repeat the variable.

You can do the same with subtraction, multiplication, and division. More examples using the C programming language can be found in Code Snippet 2.2. It is important to note that these operators are *not*, strictly speaking, equivalent. That is `a += 10` is not equivalent to `a = a + 10`. They have the same effect, but the first involves only *one* operator while the second involves *two* operators.

```
1  int a = 10;
2  a += 5; //adds 5 to a
3  a -= 3; //subtracts 3 from a
4  a *= 2; //multiplies a by 2
5  a /= 4; //divides a by 4
6
7  //you can also use compound assignment operators with variables:
8  int b = 5;
9  a += b; //adds the value stored in b to a
10 a -= b; //subtracts the value stored in b from a
11 a *= b; //multiplies a by b
12 a /= b; //divides a by b
```

Code Sample 2.2: Compound Assignment Operators in C

2.4. Basic Input/Output

Not all variables can be coded using literals. Sometimes a program needs to read in values as `input` from a user who can give different values on different runs of a program.

Likewise, a computer program often needs to produce **output** to the user to be of any use.

The most basic types of programs are **interactive** programs that interact with a human user. Generally, the program may **interactive** the user to enter some input value(s) or make some choices. It may then compute some values and respond to the user with some output.

In the following sections we'll overview the various types of input and output or I/O for short that are available.

2.4.1. Standard Input & Output

The standard input (stdin for short), standard output (stdout) and standard error (stderr) are three standard communication *streams* that are defined by most computer systems.

Though perhaps an over simplification, the keyboard usually serves as a standard input device while the monitor (or the system *console* or shell program) serves as a standard output device. The standard error is usually displayed in the same display but may be displayed differently on some systems (it is typeset in red in some consoles that support color to indicate that the output is communicating an error).

As a program is executing, it may prompt a user to enter input. A program may wait (called blocking) until a user has typed whatever input they want to provide. The user typically hits the enter key to indicate their input is done and the program resumes, reading the input provided via the standard input. The program may also produce output which is displayed to the user.

The standard input and output are generally universal: almost any language, and operating system will support them and they are the most basic types of input/output. However, the type of input and output is somewhat limited (usually limited to text-based I/O) and doesn't provide much in the way of input **validation**. As an example, suppose that a program prompts a user to enter a number. Since the input device (keyboard) is does not really restrict the user, a more obstinate user may enter a non-numeric value, say "hello". The program may crash or provide garbage output with such input.

2.4.2. Graphical User Interfaces

A much more user-oriented way of reading input and displaying output is to use a **Graphical User Interface (GUI)**. GUIs can be implemented as traditional "thick-client" applications (programs that are installed locally on your machine) or as "thin-client" applications such as a web application. They typically support general "widgets" such as input boxes, buttons, sliders, etc. that allow a user to interact with the program in a more visual way. They also allow the programmer to do better input validation. Widgets

Language	Standard Output	String Output
C	<code>printf</code>	<code>sprintf</code>
Java	<code>System.out.printf</code>	<code>String.format</code>
PHP	<code>printf</code>	<code>sprintf</code>

Table 2.5.: `printf`-style Methods in Several Languages. Languages support formatting directly to the Standard Output as well as to strings that can be further used or manipulated. Most languages also support `printf`-style formatting to other output mechanisms (streams, files, etc.).

could be design so that *only* good input is allowed by creating *modal* restrictions: the user is only allowed to select one of several “radio” buttons for example. GUIs also support visual feedback cues to the user: popups, color coding, and other elements can be used to give feedback on errors and indicate invalid selections.

Graphical user interfaces can also make use of more modern input devices: mice, touch screens with gestures, even gaming devices such as the Kinect allow users to use a full body motion as an input mechanism. We discuss GUIs in more detail in Chapter 13. To begin, we’ll focus more on plain textual input and output.

2.4.3. Output Using `printf`-style Formatting

Recall that many languages allow you to concatenate a string and a non-string type in order to produce a string that can then, say, be output to the standard output. Concatenation doesn’t provide much in the way of customizability when it comes to *formatting* output. We may want to format a floating-point number so that it only prints to two decimal places (as with US currency). We may want to align a column of data so that number places match up. Or we may want to *justify* text either left or right.

Such data formatting can be achieved through the use of a `printf`-style formatting function. The ideas date back to the mid-60s, but the modern `printf` comes from the C programming language. Numerous programming languages support this style of formatted output (`printf` stands for **print** formatted). Most support either printing the resulting formatted output to the standard output as well as to strings and other output mechanisms (files, streams, etc.). Table 2.5 contains a small sampling of `printf`-style supported in several languages. We’ll illustrate this usage using the C programming language for our examples, but the concepts are generally universal across most languages.

The function works by providing it a number of *arguments*. The first argument is always a string that specifies the formatting of the result using several *placeholders* (flags that begin with a percent sign) which will be replaced with values stored in variables but in a formatted manner. Subsequent arguments to the function are the list of variables to be printed; each argument is delimited by a comma. Figure 2.3 gives an example of of a

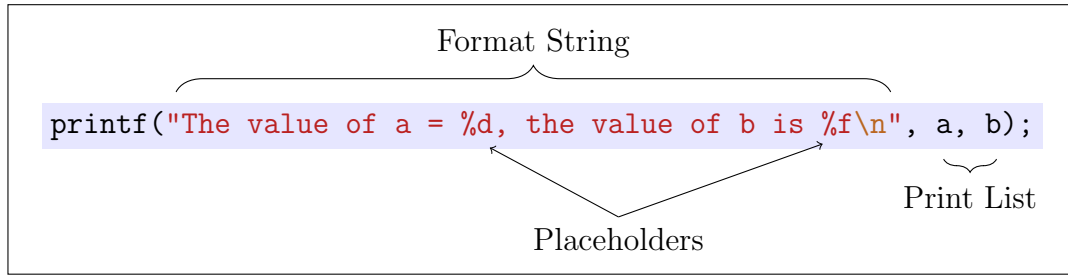


Figure 2.3.: Elements of a `printf` statement in C

`printf` statement with two placeholders. The placeholders are ultimately replaced with the values stored in the provided variables a, b . If a, b held the values 10 and 2.718281, the code would end up printing

The value of $a = 10$, the value of b is 2.718281

Though there are dozens of placeholders that are supported, we will focus only on a few:

- `%d` formats an integer variable or literal
- `%f` formats a floating-point variable or literal
- `%c` formats a single character variable or literal
- `%s` formats a string variable or literal

Misuse of placeholders may result in garbage output. For example, using an integer placeholder, `%d`, but providing a string argument; since strings cannot be (directly) converted to integers, the output will not be correct.

In addition to these placeholders, you can also add *modifiers*. A number n between the percent sign and character (`%nd`, `%nf`, `%ns`) specifies that the result should be formatted with a *minimum* of n columns. If the output takes less than n columns, `printf` will pad out the result with spaces so that there are n columns. If the output takes n or more columns, then the modifier will have no effect (it specifies a *minimum* not a maximum).

Floating-point numbers have a second modifier that allows you to specify the number of digits of precision to be formatted. In particular, you can use the placeholder `%n.mf` in which *n* has the same meaning, but *m* specifies the number of decimals to be displayed. By default, 6 decimals of precision are displayed. If *m* is greater than the precision of the number, zeros are usually used for subsequent digits; if *m* is smaller than the precision of the number, rounding *may* occur. Note that the *n* modifier *includes* the decimal point as a column. Both modifiers are optional.

Finally, each of these modifiers can be made negative (example: `%-20d`) to *left-justify* the result. By default, justification is to the right. Several examples are illustrated in Code Sample 2.3 with the results in Code Sample 2.4.

```
1  int a = 4567;
2  double b = 3.14159265359;
3
4  printf("a=%d\n", a);
5  printf("a=%2d\n", a);
6  printf("a=%4d\n", a);
7  printf("a=%8d\n", a);
8
9  //by default, prints 6 decimals of precision
10 printf("b=%f\n", b);
11 //the .m modifier is optional:
12 printf("b=%10f\n", b);
13 //the n modifier is also optional:
14 printf("b=%.2f\n", b);
15 //note that this rounds!
16 printf("b=%10.3f\n", b);
17 //zeros are added so that 15 decimals are displayed
18 printf("b=%20.15f\n", b);
```

Code Sample 2.3: `printf` examples in C

2.4.4. Command Line Input

Not all programs are interactive. In fact, the vast majority of software is developed to interact with other software and does not expect that a user is sitting at the console constantly providing it with input. Most languages and operating systems support non-interactive input from the [Command Line Interface \(CLI\)](#). This is input that is provided at the command line when the program is executed. Input provided from the command line are usually referred to as *command line arguments*. For example, if we invoke a program named `myProgram` from the command line prompt using something like the following:

```
~>./myProgram a 10 3.14
```

Then we would have provided 4 command line arguments. The first argument is usually the program's name, all subsequent arguments are separated by whitespace. Command line arguments are provided to the program as strings and it is the program's responsibility to convert them if needed and to validate them to ensure that the correct expected number and type of arguments are were provided.

Within a program, command line arguments are usually referred to as an argument vector (sometimes in a variable named `argv`) and argument count (sometimes in a variable named `argc`). We explore how each language supports this in subsequent sections.

```

a=4567
a=4567
a=4567
a=_____4567
b=3.141593
b=____3.141593
b=3.14
b=_______3.142
b=_____3.141592653590000

```

Code Sample 2.4: Result of Computation in Code Sample 2.3. Spaces are highlighted for clarity.

2.5. Debugging

Making mistakes in programming is inevitable. Even the most expert of software developers make mistakes.⁷ An error in computer programs are usually referred to as [bugs](#). The term was popularized by Grace Hopper in 1947 while working on a Mark II Computer at a US Navy research lab. Literally, a moth stuck in the computer was impeding its operation, removing it or “debugging” the computer fixed it. In this section will identify general types of errors and outline ways to address them.

2.5.1. Types of Errors

When programming there are several types of errors that can occur, some can be easily detected (or even easily fixed) by compilers and other modern code analysis tools such as [IDEs](#).

Syntax Errors

Syntax errors are errors in the usage of a programming language itself. A syntax error can be a failure to adhere to the rules of the language such as misspelling a keyword or forgetting proper “punctuation” (such as missing an ending semicolon). When you have a syntax error, you’re essentially not “speaking the same language”: You wouldn’t be very comprehensible if you started injecting non-sense words or words from different language when speaking to someone in English. Similarly, a computer can’t understand what you’re trying to say (or what directions you’re trying to give it) if you’re not speaking the same language.

⁷A severe security bug in the popular unix bash shell utility went undiscovered for 25 years before it was finally fixed in September 2014, missed by thousands of experts and some of the best coders in the world.

2. Basics

Typically syntax errors prevent you from even compiling a program, though syntax errors can be a problem at runtime with interpreted languages. When it encounters a syntax error, a compiler will fail to complete the compilation process and will generally quit. Ideally, the compiler will give reasons for why it was unable to compile and will hopefully identify the line number where the syntax error was encountered with a hint on what was wrong. Unfortunately, many times a compiler's error message isn't too helpful or may indicate a problem on one line where the root cause of the problem is earlier in the program. One cannot expect too much from a compiler after all. If a compiler were able to correctly interpret and fix our errors for us, we'd have "natural language" programming where we could order the computer to execute our commands in plain English. If we had this science fiction-level of computer interaction we wouldn't need programming languages at all.

Fixing syntax errors involves reading and interpreting the compiler error messages, reexamining the program and fixing any and all issues to conform to the syntax of the programming language. Fixing one syntax error may enable the compiler to find additional syntax errors that it had not before. Only once all syntax errors have been resolved can a program actually compile. For interpreted languages, the program may be able to run up to where it encounters a syntax error and then exits with a fatal error. It may take several runs to resolve such errors as well.

Runtime Errors

Once a program is free of syntax errors it can compile and be run. However, that doesn't mean that the program is completely free of bugs, just that it is free of the types of bugs (syntax errors) that the compiler is able to detect. A compiler is not able to predict every action or possible event that could occur when a program is actually run. A runtime error is an error that occurs while a program is being executed. For example, a program could attempt to access a file that does not exist, or attempt to connect to a database, but the computer has lost its network connection, or a user could enter bad data that results in an invalid arithmetic operation, etc.

A compiler cannot be expected to detect such errors because by definition, the conditions under which runtime errors occur occur *at runtime*, not at compile time. One run of a program could execute successfully, while another subsequent run could fail because the system conditions have changed. That doesn't mean that we should mitigate the consequences of runtime errors.

As a programmer it is important to think about the potential problems and runtime errors that could occur and make contingency plans accordingly. We can make reasonable assumptions that certain kinds of errors may occur in the execution of our program and add code to *handle* those errors if they occur. This is known as *error handling* (which we discuss in detail in Chapter 6). For example, we could add code that checks if a user enters bad input and then re-prompt them to enter good data. If a file is missing, we

could add code to create it as needed. By checking for these errors and preventing illegal, potentially fatal operations, we practice [defensive programming](#).

Logic Errors

Other errors may be a result of bad code or bad design. Computer do exactly as they are told to do. Logic errors can occur if we tell the computer to do something that we didn't intend for them to do. For example, if we tell the computer to execute command *A* under condition *X*, but we meant to have the computer execute command *B* under condition *Y*, we have caused a logical error. The computer will perform the first set of instructions, not the second as we intended. The program may be free of syntax errors and may execute without any problems, but we certainly don't get the *results* that we expected.

Logic errors are generally only detected and addressed by rigorous *software testing*. When developing software, we can also design a collection of *test cases*: a set of inputs along with correct outputs that we would expect the program of code to produce. We can then test the program with these inputs to see if they produce the same output as in the test cases. If they don't, then we've uncovered a logical error that needs to be addressed.

Rigorous testing can be just as complex (or even *more* complex) than writing the program itself. Testing alone cannot guarantee that a program is free of bugs (in general, the number of possible inputs is *infinite*; it is *impossible* to test all possibilities). However, the more test cases that we design and pass the higher the confidence we have that the program is correct.

Testing can also be very tedious. Modern software engineering techniques can help streamline the process. Many testing frameworks have been developed and built that attempt to automate the testing process. Test cases can be randomly generated, test suites can be repeatedly run and verified throughout the development process. Frameworks can perform *regression testing* to see if fixing one bug caused another, etc.

2.5.2. Strategies

A common beginner's way of debugging a program is to insert temporary print statements throughout their program to see what values variables have at certain points in an attempt to isolate where an error is occurring. This is an okay strategy for extremely simple programs, but it's the "poor man's" way of debugging. As soon as you start writing more complex programs you quickly realize that this strategy is slow, inefficient, and can actually hide the real problems (the standard output is not guaranteed to work as expected if an error has occurred, so print statements may actually mislead you into thinking the problem occurs at one point in the program when it actually occurs in a different part).

2. Basics

Instead, it is much better to use a proper *debugging tool* in order to isolate the problem. A debugger is another program, that allows you to “simulate” an execution of your program. You can set *break points* in your program on certain lines and the debugger will execute your program up to those points. It then pauses and allows you to look at the program’s state: you can examine the contents of memory, look at the values stored in certain variables, etc. Debuggers will also allow you to resume the execution of your program to the next break point or allow you to “step” through your program line by line. This allows you to examine the execution of a program at human speed in order to diagnose the exact point in execution where the problem occurs. IDEs allow you to do this visually with a graphical user interface and easy visualization of variables. However, there are command line debuggers such as GDB (GNU’s Not Unix! (GNU) Debugger) that you interact with using text commands.

In general, debugging strategies attempt to isolate a problem to as small of a code segment as possible. For this reason, it is good practice to design code into as small of segments as possible using good procedural abstraction and use of functions and methods (see Chapter 5) and creating test cases and suites for these small pieces of code.

It can also help to diagnose a problem by looking at the nature of the failure. If some test cases pass and others fail you can get a hint as to what’s wrong by examining the key differences between the test cases. If one value passes and another fails, you can trace that value as it propagates through the execution of your program to see how it affects other value.

In the end, good debugging skills, just like good coding skills, come from experience. A seasoned expert may be able to look at an error message and immediately diagnose the problem. Or, a bug can escape the detection of hundreds of the best developers and software tools and end up costing millions of dollars and thousands of man-hours because of a simple failure to convert from English units to metric (in 1999, the Mars Climate Orbiter broke up in the atmosphere of Mars because one subsystem was computing force using pound-seconds while everything else was computing in newton-seconds leading to a miscalculation of orbital entry [1]).

2.6. Examples

Let’s apply these concepts by developing several prompt-and-compute style programs. That is, the programs will prompt the user for input, perform some calculations, and then output a result.

To write these programs, we’ll use pseudocode, an informal, abstract description of a program/algorithm. Pseudocode does not use any language-specific syntax. Instead, it describes processes at a high-level, making use of plain English and mathematical notation. This allows us to focus on the actual process/program rather than worrying about the particular syntax of a specific language. Good pseudocode should be easily

translated into any programming language.

2.6.1. Temperature Conversion

Temperature can be measured in several different scales. The most common for everyday use is Celsius and Fahrenheit. Let's write a program to convert from Fahrenheit to Celsius using the following formula:

$$C = \frac{5}{9} \cdot (F - 32)$$

The basic outline of the program will be three simple steps:

1. Read in a Fahrenheit value from the user
2. Compute a Celsius value using the formula above
3. Output the result to the user

This is actually pretty good pseudocode already, but let's be a little more specific using some of the operators and notation we've established above. The full program can be found in Algorithm 2.4.

```

1 prompt the user to enter a temperature in Fahrenheit
2  $F \leftarrow$  read input from user
3  $C \leftarrow \frac{5}{9} \cdot (F - 32)$ 
4 Output  $C$  to the user

```

Algorithm 2.4: Temperature Conversion Program

2.6.2. Quadratic Roots

A common math exercise is to find the *roots* of a quadratic equation with coefficients, a, b, c ,

$$ax^2 + bx + c = 0$$

using the quadratic formula,

$$\frac{-b \pm \sqrt{b^2 - 4ac}}{2a}$$

Following the same basic outline, we'll read in the coefficients from the user, compute each of the roots, and output the results to the user. Here, however, we may two computations, one for each of the roots which we label r_1, r_2 . The full procedure is presented in Algorithm 2.5.

2. Basics

```
1 prompt the user to enter  $a$ 
2  $a \leftarrow$  read input from user
3 prompt the user to enter  $b$ 
4  $b \leftarrow$  read input from user
5 prompt the user to enter  $c$ 
6  $c \leftarrow$  read input from user
7  $r_1 \leftarrow \frac{-b + \sqrt{b^2 - 4ac}}{2a}$ 
8  $r_2 \leftarrow \frac{-b - \sqrt{b^2 - 4ac}}{2a}$ 
9 Output “the roots of  $ax^2 + bx + c$  are  $r_1, r_2$ ”
```

Algorithm 2.5: Quadratic Roots Program

2.7. Exercises

Exercise 2.1. Write a program that calculates mileage deduction for income tax using the standard rate of \$0.575 per mile. Your program will read in a beginning and ending odometer reading and calculate the difference and total deduction. Take care that your output is in whole cents. An example run of the program may look like the following.

```
INCOME TAX MILEAGE CALCULATOR
Enter beginning odometer reading--> 13505.2
Enter ending odometer reading--> 13810.6
You traveled 305.4 miles. At $.575 per mile,
your reimbursement is $175.61
```

Exercise 2.2. Write a program to compute the total “cost” C of a loan. That is, the total amount of interest paid over the life of a loan. To compute this value, use the following formula.

$$C = \frac{p \cdot i \cdot (1 + i)^{12n}}{(1 + i)^{12n} - 1} * 12n - p$$

where

- p is the starting principle amount
- $i = \frac{r}{12}$ where r is the APR on the interval $[0, 1]$
- n is the number of years the loan is to be paid back

Exercise 2.3. Write a program to compute the annualized appreciation of an asset (say a house). The program should read in a purchase price p , a sale price s and compute their difference $d = s - p$ (it should support a loss or gain). Then, it should compute an appreciation rate: $r = \frac{d}{p}$ along with an (average) *annualized appreciation rate* (that is,

what was the appreciation rate in each year that the asset was held that compounded):

$$(1 + r)^{\frac{1}{y}} - 1$$

Where y is the number of years (possibly fractional) the asset was held (and r is on the scale $[0, 1]$).

Exercise 2.4. The annual percentage yield (APY) is a much more accurate measure of the true cost of a loan or savings account that compounds interest on a monthly or daily basis. For a large enough number of compounding periods, it can be calculated as:

$$APY = e^i - 1$$

where i is the nominal interest rate ($6\% = 0.06$). Write a program that prompts the user for the nominal interest rate and outputs the APY.

Exercise 2.5. Write a program that calculates the speed of sound (v , feet-per-second) in the air of a given temperature T (in Fahrenheit). Use the formula,

$$v = 1086 \sqrt{\frac{5T + 297}{247}}$$

Be sure your program does not lose the fractional part of the quotient in the formula shown and format the output to three decimal places.

Exercise 2.6. Write a program to convert from radians to degrees using the formula

$$deg = \frac{180 \cdot rad}{\pi}$$

However, radians are on the scale $[0, 2\pi)$. After reading input from the user be sure to do some error checking and give an error message if their input is invalid.

Exercise 2.7. Write a program to compute the Euclidean Distance between two points, (x_1, y_1) and (x_2, y_2) using the formula:

$$\sqrt{(x_1 - x_2)^2 + (y_1 - y_2)^2}$$

Exercise 2.8. Write a program that will compute the value of $\sin(x)$ using the first 4 terms of the Taylor series:

$$\sin(x) \approx x - \frac{x^3}{3!} + \frac{x^5}{5!} - \frac{x^7}{7!}$$

In addition, your program will compute the *absolute* difference between this calculation and a standard implementation of the sine function supported in your language. Your program should prompt the user for an input value x and display the appropriate output. Your output should look *something* like the following.

2. Basics

```
Sine Approximation
=====
Enter x: 1.15
Sine approximation: 0.912754
Sine value:         0.912764
Difference:         0.000010
```

Exercise 2.9. Write a program to compute the roots of a quadratic equation:

$$ax^2 + bx + c = 0$$

using the well-known quadratic formula:

$$\frac{-b \pm \sqrt{b^2 - 4ac}}{2a}$$

Your program will prompt the user for the values, a, b, c and output each real root. However, for “invalid” input ($a = 0$ or values that would result in complex roots), the program will instead output a message that informs the user why that the inputs are invalid (with a specific reason).

Exercise 2.10. One of Ohm’s laws can be used to calculate the amount of *power* in Watts (the rate of energy conversion; 1 joule per second) in terms of Amps (a measure of current, 1 amp = 6.241×10^{18} electrons per second) and Ohms (a measure of electrical resistance). Specifically:

$$W = A^2 \cdot O$$

Develop a simple program to read in two of the terms from the user and output the third.

Exercise 2.11. Ohm’s Law models the current through a conductor as follows:

$$I = \frac{V}{R}$$

where V is the voltage (in volts), R is the resistance (in Ohms) and I is the current (in amps). Write a program that, given two of these values computes the third using Ohm’s Law.

The program should work as follows: it prompts the user for units of the first value: the user should be prompted to enter V, R, or I and should then be prompted for the value. It should then prompt for the second unit (same options) and then the value. The program will then output the third value depending on the input. An example run of the program:

```
Current Calculator
=====
Enter the first unit type (V, R, I): V
Enter the voltage: 25.75
Enter the second unit type (V, R, I): I
Enter the current: 72
The corresponding resistance is 0.358 Ohms
```

Exercise 2.12. Consider the following linear system of equations in two unknowns:

$$\begin{aligned} ax + by &= c \\ dx + ey &= f \end{aligned}$$

Write a program that prompts the user for the coefficients in such a system (prompt for a, b, c, d, e, f). Then output a solution to the system (the values for x, y). Take care to handle situations in which the system is *inconsistent*.

Exercise 2.13. The surface area of a sphere of radius r is

$$4\pi r^2$$

and the volume of a sphere with radius r is

$$\frac{4}{3}\pi r^3$$

Write a program that prompts the user for a radius r and outputs the surface area and volume of the corresponding sphere. If the radius entered is invalid, print an error message and exit. Your output should look something like the following.

```
Sphere Statistics
=====
Enter radius r: 2.5
area: 78.539816
volume: 65.449847
```

Exercise 2.14. Write a program that prompts for the latitude and longitude of two locations (an origin and a destination) on the globe. These numbers are in the range $[-180, 180]$ (negative values correspond to the western and southern hemispheres). Your program should then compute the air distance between the two points using the Spherical Law of Cosines. In particular, the distance d is

$$d = \arccos(\sin(\varphi_1)\sin(\varphi_2) + \cos(\varphi_1)\cos(\varphi_2)\cos(\Delta)) \cdot R$$

- φ_1 is the latitude of location A , φ_2 is the latitude of location B
- Δ is the difference between location B 's longitude and location A 's longitude
- R is the (average) radius of the earth, 6,371 kilometers

Note: the formula above assumes that latitude and longitude are measured in radians r , $-\pi \leq r \leq \pi$. See Exercise 2.6 for how to convert between them. Your program output should look something like the following.

```
City Distance
=====
Enter latitude of origin: 41.9483
Enter longitude of origin: -87.6556
Enter latitude of destination: 40.8206
Enter longitude of destination: -96.7056
Air distance is 764.990931
```

2. Basics

Exercise 2.15. Write a program that prompts the user to enter in a number of days. Your program should then compute the number of years, weeks, and days that number represents. For this exercise, ignore leap years (thus all years are 365 days). Your output should look something like the following.

```
Day Converter
=====
Enter number of days: 1000
That is
    2 years
    38 weeks
    4 days
```

Exercise 2.16. The derivative of a function $f(x)$ can be estimated using the difference function:

$$f'(x) \approx \frac{f(x + \Delta x) - f(x)}{\Delta x}$$

That is, this gives us an estimate of the slope of the tangent line at the point x . Write a program that prompts the user for an x value and a Δx value and outputs the value of the difference function for all three of the following functions:

$$\begin{aligned} f(x) &= x^2 \\ f(x) &= \sin(x) \\ f(x) &= \ln(x) \end{aligned}$$

Your output should look something like the following.

```
Derivative Approximation
=====
Enter x: 2
Enter delta-x: 0.1
(x^2)' ~ = 4.100000
sin'(x) ~ = -0.460881
ln'x(x) ~ = 0.487902
```

In addition, your program should check for invalid inputs: Δx cannot be zero, and $\ln(x)$ is undefined for $x \leq 0$. If given invalid inputs, appropriate error message(s) should be output instead.

Exercise 2.17. Write a program that prompts the user to enter two points in the plane, (x_1, y_1) and (x_2, y_2) which define a line segment ℓ . Your program should then compute and output an equation for the perpendicular line intersecting the *midpoint* of ℓ . You should take care that invalid inputs (horizontal or vertical lines) are handled appropriately. An example run of your program would look something like the following.


```

Perpendicular Line
=====
Enter x1: 2.5
Enter y1: 10
Enter x2: 3.5
Enter y2: 11
Original Line:
    y = 1.0000 x + 7.5000
Perpendicular Line:
    y = -1.0000 x + 13.5000

```

Exercise 2.18. Write a program that computes the total for a bill. The program should prompt the user for a sub-total. It should then prompt whether or not the customer is entitled to an employee discount (of 15%) by having them enter 1 for yes, 2 for no. It should then compute the new sub-total and apply a 7.35% sales tax, and print the receipt details along with the grand total. Take care that you properly round each operation.

An example run of the program should look something like the following.

```

Please enter a sub-total: 100
Apply employee discount (1=yes, 2=no)? 1

Receipt
=====
Sub-Total    $   100.00
Discount     $    15.00
Taxes        $     6.25
Total        $    91.25

```

Exercise 2.19. The ROI (Return On Investment) is computed by the following formula:

$$\text{ROI} = \frac{\text{Gain from Investment} - \text{Cost of Investment}}{\text{Cost of Investment}}$$

Write a program that prompts the user to enter the cost and gain (how much it was sold for) from an investment and computes and outputs the ROI. For example, if the user enters \$100,000 and \$120,000 respectively, the output look similar to the following.

```

Cost of Investment: $100000.00
Gain of Investment: $120000.00
Return on Investment: 20.00%

```

Exercise 2.20. Write a program to compute the real cost of driving. Gas mileage (in the US) is usually measured in miles per gallon but the real cost should be measured in how much it costs to drive a mile, that is, dollars per mile. Write a program to assist a user in figuring out the real cost of driving. Prompt the user for the following inputs.

- Beginning odometer reading

2. Basics

- Ending odometer reading
- Number of gallons it took to fill the tank
- Cost of gas in dollars per gallon

For example, if the user enters 50,125, 50,430, 10 (gallons), and \$3.25 (per gallon), then your output should be something like the following.

```
Miles driven: 305
Miles per gallon: 30.50
Cost per mile: $0.11
```

Exercise 2.21. A *bearing* can be measured in degrees on the scale of $[0, 360)$ with 0° being due north, 90° due east, etc. The (initial) directional bearing from location A to location B can be computed using the following formula.

$$\theta = \text{atan2}(\sin(\Delta) \cdot \cos(\varphi_2), \cos(\varphi_1) \cdot \sin(\varphi_2) - \sin(\varphi_1) \cdot \cos(\varphi_2) \cos(\Delta))$$

Where

- φ_1 is the latitude of location A
- φ_2 is the latitude of location B
- Δ is the difference between location B 's longitude and location A 's longitude
- atan2 is the two-argument arctangent function

Note: the formula above assumes that latitude and longitude are measured in radians r , $-\pi < r < \pi$. To convert from degrees d ($-180 < d < 180$) to radians r , you can use the simple formula:

$$r = \frac{d}{180}\pi$$

Write a program to prompt a user for a latitude/longitude of two locations (an origin and a destination) and computes the directional bearing (in degrees) from the origin to the destination. For example, if the user enters: 40.8206, -96.7056 (40.8206° N, 96.7056° W) and 41.9483, -87.6556 (41.9483° N, 87.6556° W), your program should output something like the following.

```
From (40.8206, -96.7056) to (41.9483, -87.6556):
bearing 77.594671 degrees
```

Exercise 2.22. General relativity tells us that time is relative to your velocity. As you approach the speed of light ($c = 299,792$ km/s), time slows down relative to objects traveling at a slower velocity. This *time dilation* is quantified by the Lorentz equation

$$t' = \frac{t}{\sqrt{1 - \frac{v^2}{c^2}}}$$

Where t is the time duration on the traveling space ship and t' is the time duration on the (say) Earth.

For example, if we were traveling at 50% the speed of light relative to Earth, one hour in our space ship ($t = 1$) would correspond to

$$t' = \frac{1}{\sqrt{1 - (.5)^2}} = 1.1547$$

hours on Earth (about 1 hour, 9.28 minutes).

Write a program that prompts the user for a velocity which represents the *percentage* p of the speed of light (that is, $p = \frac{v}{c}$) and a time duration t in hours and outputs the relative time duration on Earth.

For example, if the user enters 0.5 and 1 respectively as in our example, it should output something *like* the following:

```
Traveling at 1 hour(s) in your space ship at
50.00% the speed of light, your friends on
Earth would experience:
1 hour(s)
9.28 minute(s)
```

Your output should be able to handle years, weeks, days, hours, and minutes. So if the user inputs something like 0.9999 and 168, your output should look something like:

```
Traveling at 168.00 hour(s) in your space ship at
99.99% the speed of light, your friends on
Earth would experience:
1 year(s)
18 week(s)
3 day(s)
17 hour(s)
41.46 minute(s)
```

Exercise 2.23. Radioactive isotopes decay into other isotopes at a rate that is measured by a half-life, H . For example, Strontium-90 has a half-life of 28.79 years. If you started with 10 kilograms of Strontium-90, 28.79 years later you would have only 5 kilograms (with the remaining 5 kilograms being Yttrium-90 and Zirconium-90, Strontium-90's decay products).

Given a mass m of an isotope with half-life H we can determine how much of the isotope remains after y years using the formula,

$$r = m \cdot \left(\frac{1}{2}\right)^{(y/H)}$$

For example, if we have $m = 10$ kilograms of Strontium-90 with $H = 28.79$, after $y = 2$

2. Basics

years we would have

$$r = 10 \cdot \left(\frac{1}{2}\right)^{(2/28.79)} = 9.5298$$

kilograms of Strontium-90 left.

Write a program that prompts the user for an amount m (mass, in kilograms) of an isotope and its half-life H as well as a number of years y and outputs the amount of the isotope remaining after y years. For the example above your output should look something like the following.

```
Starting with 10.00kg of an isotope with half-life  
28.79 years, after 2.00 years you would have  
9.5298 kilograms left.
```

3. Conditionals

When writing code, it's important to be able to distinguish between one or more situations. Based on some *condition* being *true* or *false*, you may want to perform some action if it's true, while performing another, different action if it is false. Alternatively, you may simply want to perform one action if and only if the condition is true, and do nothing (move forward in your program) if it is false.

Normally, the *control flow* of a program is *sequential*: each statement is executed top-to-bottom one after the other. A *conditional* statement (sometimes called *selection* control structures) interrupts this normal control flow and executes statements only if some specified condition holds. The usual way of achieving this in a programming language is through the use of conditional statements such as the *if* statement, *if-else* statement, and *if-else-if* statement.

By using conditional statements, we can design more expressive programs whose behavior depends on their *state*: if the value of some variable is greater than some threshold, we can perform action *a*, otherwise, we can perform action *b*. You do this on a daily basis as you make decisions for yourself. At a cafe you may want to purchase the grande coffee which costs \$2. If you have \$2 or more, then you'll buy it. Otherwise, if you have less than \$2, you can settle for the normal coffee which costs \$1. Yet still, if you have less than \$1 you'll not be able to make a purchase. The value of your pocket book determines the decision and subsequent actions that you take.

Similarly, our programs need to be able to “make decisions” based on various conditions (they don't actually make decisions for themselves as computers are not really “intelligent”, we are simply specifying what should occur based on the conditions). Conditions in a program are specified by coding logical statements using *logical operators*.

3.1. Logical Operators

In logic, everything is black and white: a logical statement is an assertion that is either *true* or it is *false*. As previously discussed, some programming languages allow you to define and use boolean variables that can be assigned the value *true* or *false*. We can also formulate statements that involve other types of variables whose truth values are determined by the values of the variables at run time.

3. Conditionals

Pseudocode	Code	Meaning	Type
<	<	less than	relational
>	>	greater than	relational
≤	<=	less than or equal to	relational
≥	>=	greater than or equal to	relational
=	==	equal to	equality
≠	!=	not equal to	equality

Table 3.1.: Comparison Operators

3.1.1. Comparison Operators

Suppose we have a variable *age* representing the age of an individual. Suppose we wish to execute some code if the person is an adult, $age \geq 18$ and a different piece of code if they are not an adult, $age < 18$. To achieve this, we need to be able to make *comparisons* between variables, constants, and even more complex expressions. Such logical statements may not have a fixed truth value. That is, they could be *true* or *false* depending on the value of the variables involved when the program is run.

Such comparisons are common in mathematics and likewise in programming languages. Comparison operators are usually *binary operators* in that they are applied to two *operands*: a left operand and a right operand. For example, if a, b are variables (or constants or expressions), then the comparison,

$$a \leq b$$

is *true* if the value stored in a is less than or equal to the value stored in b . Otherwise, if the value stored in b is strictly less than the value stored in a , the expression is *false*. Further, a, b are the *operands* and \leq is the binary operator.

In general, operators do not *commute*. That is,

$$a \leq b \text{ and } b \leq a$$

are not equivalent, just as they are not in mathematics. However,

$$a \leq b \text{ and } b \geq a$$

are equivalent. Thus, the order of operands is important and can change the meaning and truth value of an expression.

A full listing of binary operators can be found in Table 3.1. In this table, we present both the mathematical inspired notation used in our pseudocode examples as well as the most common ways of representing these comparison operators in most programming languages. The need for alternative representations is because some symbols are not part of the [ASCII](#) character set common to most keyboards.

When using comparison operators, either operand can be variables, constants, or even more complex expressions. For example, you can make comparisons between two variables,

$$a < b, \quad a > b, \quad a \leq b, \quad a \geq b, \quad a = b, \quad a \neq b$$

or they can be between a variable and a constant

$$a < 10, \quad a > 10, \quad a \leq 10, \quad a \geq 10, \quad a = 10, \quad a \neq 10$$

or

$$10 < b, \quad 10 > b, \quad 10 \leq b, \quad 10 \geq b, \quad 10 = b, \quad 10 \neq b$$

Comparisons can also be used with more complex expressions such as

$$\sqrt{b^2 - 4ac} < 0$$

which could commonly be expressed in code as

```
sqrt(b*b - 4*a*c) < 0
```

Observe that both operands *could* be constants, such as $5 \leq 10$ but there would be little point. Since both are constants, the truth value of the expression is already determined before the program runs. Such an expression could easily be replaced with a simple *true* or *false* variable. These are referred to as tautologies and contradictions respectively. We'll examine them in more detail below.

Pitfalls

Sometimes you may want to check that a variable falls in a *range*. For example, we may want to test that x lies in the interval $[0, 10]$ (between 0 and 10 inclusive on both ends). Mathematically we could express this as

$$0 \leq x \leq 10$$

and in code, we may try to do something like

```
0 <= x <= 10
```

However, when used in code, the operators `<=` are binary and must be applied to two operands. In a language the first inequality, `0 <= x` would be evaluated and would result in either *true* or *false*. The result is then used in the second comparison which results in a question such as *true* ≤ 10 or *false* ≤ 10 .

Some languages would treat this as a syntax error and not allow such an expression to be compiled since you cannot compare a boolean value to a numerical value. However, other languages *may* allow this, typically representing *true* with some nonzero value such as 1 and *false* with 0. In either case, the expression would evaluate to *true* since both $0 \leq 10$ and $1 \leq 10$. However, this is clearly wrong: if x had a value of 20 for example, the

3. Conditionals

first expression would evaluate to *false*, making the entire expression *true*, but $20 \not\leq 10$. The solution is to use *logical operators* to express the same logic using *two* comparison operators (see Section 3.1.3).

Another common pitfall when programming is to mistake the assignment operator (typically only one equals sign, `=`) and the equality operator (typically two equal signs, `==`). As before, some languages will not allow it. The expression `a = 10` would *not* have a truth value associated with it. Attempts to use the expression in a logical statement would be a syntax error.

Still yet, other languages may permit the expression and would give it a truth value equal to the value of the variable. For example, `a = 10` would take on the value 10 and treated as *true* (nonzero value) while `a = 0` would take on the value 0 and be treated as *false* (zero). In either case, we probably do not get the result that we want. Take care that you use proper equality comparison operator.

Other Considerations

The comparison operators that we've examined are generally used for comparing numerical types. However, sometimes we wish to compare non-numeric types such as single characters or strings. Some languages allow you to use numeric operators with these types as well. We examine specific uses in subsequent chapters.

Some dynamically typed languages (PHP, JavaScript, etc.) have additional rules when comparison operators are used with *mixed* types (that is, we compare a string with a numeric type). They may even have additional “strict” comparison operators such as `(a === b)` and `(a !== b)` which are *true* only if the values *and* types match. So, for example, `(10 == "10")` may be *true* because the values match, but `(10 === "10")` would be *false* since the *types* do not match (one is an integer, the other a string). We discuss specifics in subsequent chapters as they pertain to specific languages.

3.1.2. Negation

The *negation* operator is an operator that “flips” the truth value of the expression that it is applied to. It is very much like the numerical negation operator which when applied to positive numbers results in their negation and vice versa. When the logical negation operator is applied to a variable or statement, it negates its truth value. If the variable or statement was *true*, its negation is *false* and vice versa.

Also like the numerical negation operator, the logical negation operator is a *unary* operator as it applies to only *one* operand. In modern logic, the symbol \neg is used to

a	$\neg a$
<i>false</i>	<i>true</i>
<i>true</i>	<i>false</i>

Table 3.2.: Logical Negation, \neg Operator

denote the negation operator¹, examples:

$$\neg p, \quad \neg(a > 10), \quad \neg(a \leq b)$$

We will adopt this notation in our pseudocode, however most programming languages use the exclamation mark, `!` for the negation operator, similar to its usage in the inequality comparison, `!=`.

The negation operator applies to the variable or statement immediately following it, thus

$$\neg(a \leq b) \quad \text{and} \quad \neg a \leq b$$

are not the same thing (indeed, the second expression may not even be valid depending on the language). Further, when used with comparison operators, it is better to use the “opposite” comparison. For example,

$$\neg(a \leq b) \quad \text{and} \quad (a > b)$$

are equivalent, but the second expression is preferred as it is simpler. Likewise,

$$\neg(a = b) \quad \text{and} \quad (a \neq b)$$

are equivalent, but the second expression is preferred.

3.1.3. Logical And

The logical *and* operator (also called a *conjunction*) is a binary operator that is *true* if and only if *both* of its operands is *true*. If one of its operands is *false*, or if both of them are *false*, then the result of the logical and is *false*.

Many programming languages use two ampersands, `a && b` to denote the logical AND operator.² However, for our pseudocode we will adopt the notation `AND`, thus the logical and can be expressed as $a \text{ AND } b$. Table 3.3 contains a truth table representation of the logical AND operator.

¹ This notation was first used by Heyting, 1930 [14]; prior to that the tilde symbol was used ($\sim p$ for example) by Peano [22] and Whitehead & Russell [25]. However, the tilde operator has been adopted to mean *bit-wise* negation in programming languages.

² In logic, the “wedge” symbol, $p \wedge q$ is used to denote the logical and. It was first used again by Heyting, 1930 [14] but should not be confused for the keyboard caret, \wedge , symbol. Many programming languages do use the caret as an operator, but it is usually the *exclusive-or* operator which is *true* if and only if exactly one of its operands is *true*

3. Conditionals

<i>a</i>	<i>b</i>	<i>a</i> AND <i>b</i>
<i>false</i>	<i>false</i>	<i>false</i>
<i>false</i>	<i>true</i>	<i>false</i>
<i>true</i>	<i>false</i>	<i>false</i>
<i>true</i>	<i>true</i>	<i>true</i>

Table 3.3.: Logical AND Operator

The logical AND is used to combine logical statements to form more complex logical statements. Recall that we couldn't directly use two comparison operators to check that a variable falls in a range, $0 \leq x \leq 10$. However, we can now use a logical AND to express this:

$$(0 \leq x) \text{ AND } (x \leq 10)$$

This expression is *true* only if both comparisons are true.

Though the conjunction is a binary operator, we can write statements that involve more than one variable or expression by using multiple instances of the operator. For example,

$$b^2 - 4ac \geq 0 \text{ AND } a \neq 0 \text{ AND } c > 0$$

The above statement would be evaluated left-to-right; the first two operands would be evaluated and the result would be either *true* or *false*. Then the result would be used as the first operand of the second logical AND. In this case, if any of the operands evaluated to *false*, the entire expression would be *false*. Only if all three were *true* would the statement be *true*.

3.1.4. Logical Or

The logical *or* operator is the binary operator that is *true* if *at least one* of its operands is *true*. If both of its operands are *false*, then the logical or is *false*. This is in contrast to what is usually meant in colloquially. If someone says “you can have cake or ice-cream,” usually they implicitly also mean, “but not both.” With the logical or operator, if both operands are *true*, the result is still *true*.

Many programming languages use two vertical bars (also referred to as *Sheffer strokes*), `||` to denote the logical OR operator.³ However, for our pseudocode we will adopt the notation OR, thus the logical or can be expressed as *a* OR *b*. Table 3.4 contains a truth table representation of the logical OR operator.

As with the logical AND, the logical OR is used to combine logical statements to make more complex statements. For example,

$$(age \geq 18) \text{ OR } (year = \text{“senior”})$$

³In logic, the “vee” symbol, $p \vee q$ is used to denote the logical OR. It was first used by Russell, 1906 [23].

<i>a</i>	<i>b</i>	<i>a OR b</i>
<i>false</i>	<i>false</i>	<i>false</i>
<i>false</i>	<i>true</i>	<i>true</i>
<i>true</i>	<i>false</i>	<i>true</i>
<i>true</i>	<i>true</i>	<i>true</i>

Table 3.4.: Logical OR Operator

which is *true* if the individual is aged 18 or older, is a senior, or is both 18 or older *and* a senior. If the individual is aged less than 18 and is not a senior, then the statement would be *false*.

We can also write statements with multiple OR operators,

$$a > b \text{ OR } b > c \text{ OR } a > c$$

which will be evaluated left-to-right. If any of the three operands is *true*, the statement will be *true*. The statement is only *false* when *all three* of the operands is *false*.

3.1.5. Compound Statements

The logical AND and OR operators can be combined to express even more complex logical statements. For example, you can express the following statements involving *both* of the operators:

$$a \text{ AND } (b \text{ OR } c) \quad a \text{ OR } (b \text{ AND } c)$$

As an example, consider the problem of deciding whether or not a given year is a leap year. The Gregorian calendar defines a year as a leap year if it is divisible by 4. However, every year that is divisible by 100 is *not* a leap year unless it is also divisible by 400. Thus, 2012 is a leap year (4 goes into 2012 503 times), however, 1900 was *not* a leap year: though it is divisible by 4 ($1900/4 = 475$ with no remainder), it is also divisible by 100. The year 2000 *was* a leap year: it was divisible by 4 and 100 thus it was divisible by 400.

When generalizing these rules into logical statements we can follow a similar process: A *year* is a leap year if it is divisible by 400 or it is divisible by 4 and not by 100. This logic can be modeled with the following expression.

$$year \bmod 400 = 0 \text{ OR } (year \bmod 4 = 0 \text{ AND } year \bmod 100 \neq 0)$$

When writing logical statements in programs it is generally best practice to keep things simple. Logical statements should be written in the most simple and succinct (but *correct*) way possible.

3. Conditionals

Tautologies and Contradictions

Some logical statements have the same meaning regardless of the variables involved. For example,

$$a \text{ OR } \neg a$$

is *always true* regardless of the value of a . To see this, suppose that a is *true*, then the statement becomes

$$a \text{ OR } \neg a = \text{true OR false}$$

which is *true*. Now suppose that a is *false*, then the statement is

$$a \text{ OR } \neg a = \text{false OR true}$$

which again is *true*. A statement that is always *true* regardless of the truth values of its variables is a [tautology](#).

Similarly, the statement

$$a \text{ AND } \neg a$$

is always *false* (at least one of the operands will always be *false*). A statement that is always *false* regardless of the truth values of its variables is a [contradiction](#).

In most cases, it is pointless to program a conditional statement with tautologies or contradictions: if an if-statement is predicated on a tautology it will *always* be executed. Likewise, an if-statement involved with a contradiction will *never* be executed. In either case, many compilers or code analysis tools may indicate and warn about these situations and encourage you to modify the code or to remove “[dead code](#)”. Some languages may not even allow you write such statements.

There are always exceptions to the rule. Sometimes you may wish to *intentionally* write an infinite loop (see Section [4.5.2](#)) for example in which case a statement similar to the following may be written.

```
1 WHILE true DO
  | //some computation
2 END
```

De Morgan's Laws

Another tool to simplify your logic is De Morgan's Laws. When a logical AND statement is negated, it is equivalent to an *unnegated* logical OR statement and vice versa. That is,

$$\neg(a \text{ AND } b) \quad \text{and} \quad \neg a \text{ OR } \neg b$$

Order	Operator
1	\neg
2	AND
3	OR

Table 3.5.: Logical Operator Order of Precedence

are equivalent to each other;

$$\neg(a \text{ OR } b) \quad \text{and} \quad \neg a \text{ AND } \neg b$$

are also equivalent to each other. Though equivalent, it is generally preferable to write the simpler statement. From one of our previous examples, we could write

$$\neg((0 \leq x) \text{ AND } (x \leq 10))$$

or we could apply De Morgan's Law and simplify this to

$$(0 > x) \text{ OR } (x > 10)$$

which is more concise and arguably more readable.

Order of Precedence

Recall that numerical operators have a well-defined order of precedence that is taken from mathematics (multiplication is performed before addition for example, see Section 2.3.4). When working with logical operators, we also have an order of precedence that somewhat mirrors those of numerical operators. In particular, negations are always applied *first*, followed by AND operators, and then lastly OR operators.

For example, the statement

$$a \text{ OR } b \text{ AND } c$$

is somewhat ambiguous. We don't just read it left-to-right since the AND operator has a higher order of precedence (this is similar to the mathematical expression $a + b \cdot c$ where the multiplication would be evaluated first). Instead, this statement would be evaluated by evaluating the AND operator first and then the result would be applied to the OR operator. Equivalently,

$$a \text{ OR } (b \text{ AND } c)$$

If we had *meant* that the OR operator should be evaluated *first*, then we should have explicitly written parentheses around the operator and its operands like

$$(a \text{ OR } b) \text{ AND } c$$

3. Conditionals

In fact, its best practice to write parentheses even if it is not necessary. Writing parentheses is often clearer and easier to read and more importantly communicates *intent*. By writing

$$a \text{ OR } (b \text{ AND } c)$$

the intent is clear: we want the AND operator to be evaluated first. By not writing the parentheses we leave our meaning somewhat ambiguous and force whoever is reading the code to recall the rules for order of precedence. By explicitly writing parentheses, we reduce the chance for error both in writing and in reading. Besides, its not like we're paying by the character.

For similar operators of the same precedence, they are evaluated left-to-right, thus

$$a \text{ OR } b \text{ OR } c \text{ is equivalent to } ((a \text{ OR } b) \text{ OR } c)$$

and

$$a \text{ AND } b \text{ AND } c \text{ is equivalent to } ((a \text{ AND } b) \text{ AND } c)$$

3.1.6. Short Circuiting

Consider the following statement:

$$a \text{ AND } b$$

As we evaluate this statement, suppose that we find that *a* is *false*. Do we need to examine the truth value of *b*? The answer is no: since *a* is *false*, regardless of the truth value of *b*, the statement is false because it is a logical AND. Both operands must be *true* for an AND to be *true*. Since the first is *false*, the second is irrelevant.

Now imagine evaluating this statement in a computer. If the first operand of an AND statement is *false*, we don't need to examine/evaluate the second. This has some potential for improved efficiency: if the second operand does not need to be evaluated, a program could ignore it and save a few CPU cycles. In general, the speed up for most operations would be negligible, but in some cases the second operand could be very "expensive" to compute (it could be a complex function call, require a database query to determine, etc.) in which case it could make a substantial difference.

Historically, avoiding even a few operations in old computers meant a difference on the order of milliseconds or even seconds. Thus, it made sense to avoid unnecessary operations. This is now known as **short circuiting** and to this day is still supported in many if not most programming languages. Though the differences are less stark in terms of CPU resources, most developers and programmers have come to *expect* the behavior and write statements under the assumption that short-circuiting will occur.

Short circuiting is commonly used to "check" for invalid operations. This is commonly used to prevent invalid operations. For example, consider the following statement:

$$(d \neq 0 \text{ AND } 1/d > 1)$$

The first operand is checking to see if d is not zero and the second checks to see if its reciprocal is greater than 1. With short-circuiting, if $d = 0$, then the second operand will not be evaluated and the division by zero will be prevented. If $d \neq 0$ then the first operand is *true* and so the second operand will be evaluated as normal. Without short-circuiting, both operands would be evaluated leading to a division by zero.

There are many other common patterns that rely on short-circuiting to avoid invalid or undefined operations. Checking that a variable is valid (defined or not NULL) before using it to evaluate an expression, or checking that an index variable is within the range of an array's size before accessing its value for example.

Historically, the short-circuited version of the AND operator was known as *McCarthy's sequential conjunction operation* which was formally defined by John McCarthy (1962) as "if p then q , else false", eliminating the evaluation of q if p is *false* [17].

Because of short-circuiting, the logical AND is effectively *not commutative*. An operator is commutative if the order of its operands is irrelevant. For example, addition and multiplication are all commutative,

$$x + y = y + x \quad x \cdot y = y \cdot x$$

but subtraction and division are not,

$$x - y \neq y - x \quad x/y \neq y/x$$

In logic, the AND and OR operators are commutative, but when used in most programming languages they are not,

$$(a \text{ AND } b) \neq (b \text{ AND } a) \quad \text{and} \quad (a \text{ OR } b) \neq (b \text{ OR } a)$$

It is important to emphasize that they are still *logically* equivalent, but they are not *effectively* equivalent: because of short-circuiting, each of these statements have a *potentially* different effect.

The OR operator is also short-circuited: if the first operand is *true*, then the truth value of the expression is already determined to be *true* and so the second operand will not be evaluated. In the expression,


$$a \text{ OR } b$$

if a evaluates to *true*, then b is not evaluated (since if either operand is *true*, the entire expression is *true*).

3.2. If Statement

Normally, the flow of control (or *control flow*) in a program is *sequential*. Each instruction is executed, one after the other, top-to-bottom and in individual statements left-to-right

3. Conditionals

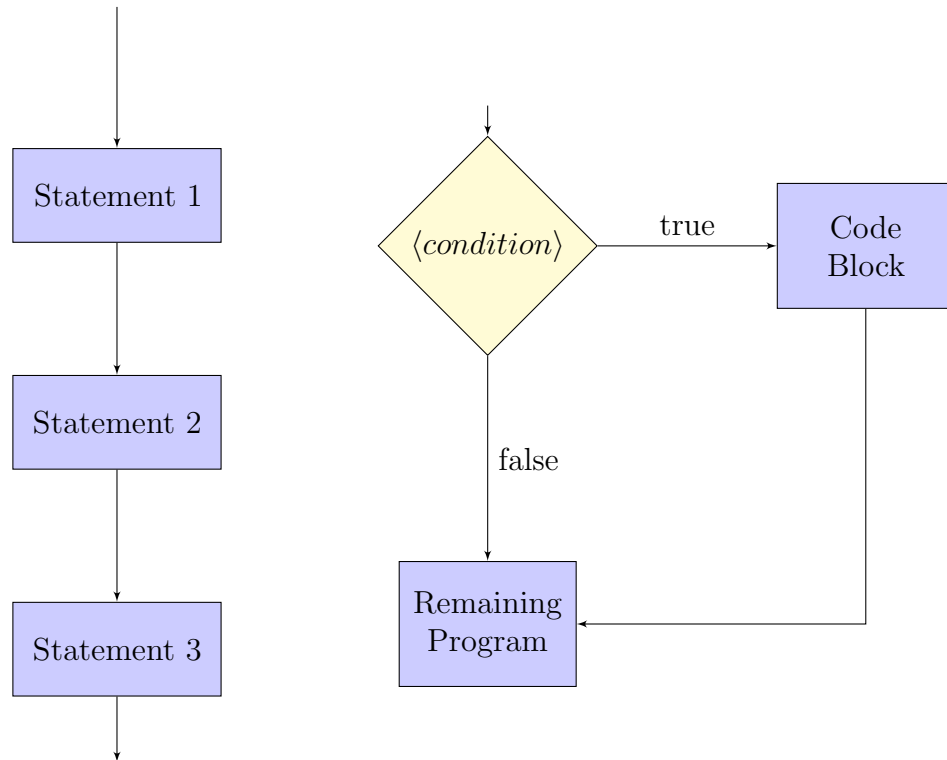

(a) Sequential Flow Chart

(b) If-Statement Flow Chart

Figure 3.1.: Control flow diagrams for sequential control flow and an if-statement. In sequential control, statements are executed one after the other as they are written. In an if-statement, the normal flow of control is interrupted and a Code Block is only executed if the given condition is *true*, otherwise it is not. After the if-statement, normal sequential control flow resumes.

just as one reads in English. Moreover, in most programming languages, each statement executes *completely* before the next statement begins. A visualization of this sequential control flow can be found in the control flow diagram in Figure 3.1(a).

However, it is often necessary for a program to “make decisions.” Some segments of code may need to be executed only if some condition is satisfied. The *if statement* is a *control structure* that allows us to write a snippet of code predicated on a logical statement. The code executes if the logical statement is *true*, and does *not* execute if the logical statement is *false*. This control flow is featured in Figure 3.1(b)

An example of the syntax using pseudocode can be found in Algorithm 3.1. The use of the keyword “if” is common to most programming languages. The logical statement associated with the if-statement immediately follows the “if” keyword and is usually surrounded by parentheses. The code block immediately following the if-statement is *bound* to the if-statement.

```

1 IF (<condition>) THEN
2   |   Code Block
3 END

```

Algorithm 3.1: An if-statement

As in the flow chart, if the $\langle condition \rangle$ evaluates to *true*, then the code block bound to the statement executes in its entirety. Otherwise, if the condition evaluates to *false*, the code block bound to the statement is skipped in its entirety.

A simple if-statement can be viewed as a “do this if *and only if* the condition holds.” Alternatively, “if this condition holds do this, otherwise don’t”. In either case, once the if-statement executes, the program returns to the normal sequential control flow.

3.3. If-Else Statement

An if-statement allows you to specify a code segment that is executed or is not executed. An if-else statement allows you to specify an alternative. An else-if statement allows you to define a condition such that if the condition is *true*, one code block executes and if the condition is *false*, an entirely different code block executes.

The control flow of an if-else statement is presented in Figure 3.2. Note that Code Block *A* and Code Block *B* are *mutually exclusive*. That is, one and only one of them is executed depending on the truth value of the $\langle condition \rangle$. A presentation of a generic if-else statement in our pseudocode can be found in Algorithm 3.2

Just as with an if-statement, the keyword “if” is used. In fact, the if-statement is simply just an if-else statement with the else block omitted (equivalently, we could have defined an *empty* else block, but since it would have no effect, a simple if-statement with no

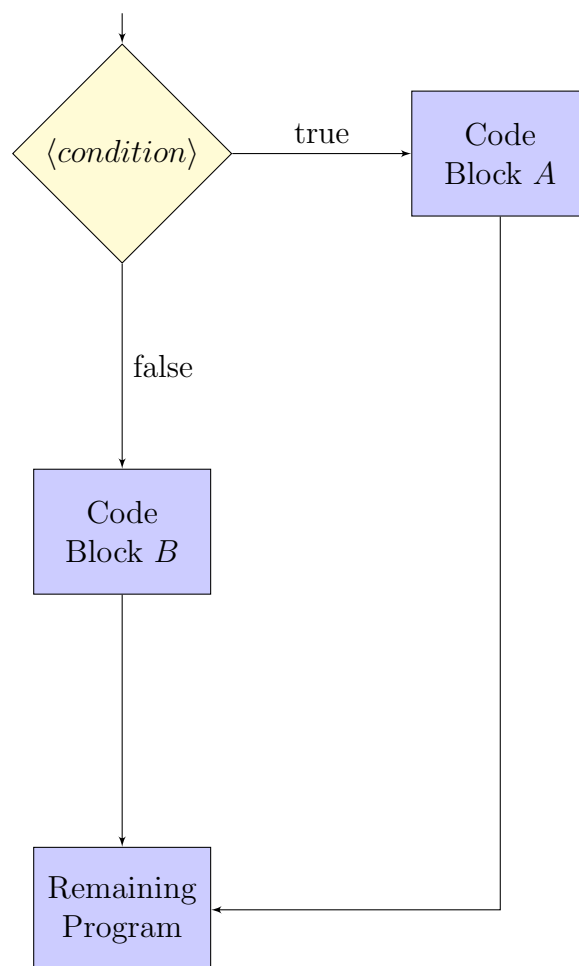


Figure 3.2.: An if-else Flow Chart

else block is preferred). It is common to most programming languages to use the “else” keyword to denote the else block of code. Since there is only one $\langle condition \rangle$ to evaluate and it can only be *true* or *false*, it is not necessary to specify the conditions under which the else block executes. It is assumed that if the $\langle condition \rangle$ evaluates to *false*, the else block executes.

As with an if-statement, the block of code associated with the if-statement as well as the block of code associated with the else-statement are executed in their entirety or not at all. Whichever block of code executes, normal flow of control returns and the remaining program continues executing sequentially.

```

1 IF ( $\langle condition \rangle$ ) THEN
2   |   Code Block A
3 ELSE
4   |   Code Block B
5 END

```

Algorithm 3.2: An if-else Statement

3.4. If-Else-If Statement

An if-statement allows you to define a “do this or do not” and an if-else statement allows you to define a “do this or do that” statement. Yet another generalization is an if-else-if statement. Using such a statement you can define any number of mutually exclusive code blocks.

To illustrate, consider the case in which we have exactly three mutually exclusive possibilities. At a particular university, there are three possible semesters depending on the month. January through May is the Spring semester, June/July is the Summer semester, and August through December is the Fall semester. These possibilities are mutually exclusive because it cannot be *both* Spring and Summer at the same time for example. Suppose we have the current month stored in a variable named *month*. Algorithm 3.3 expresses the logic for determining which semester it is using an if-else-if

3. Conditionals

statement.

```
1 IF (month ≥ January) AND (month ≤ May) THEN
2 |   semester ← “Spring”
3 ELSE IF (month > May) AND (month ≤ July) THEN
4 |   semester ← “Summer”
5 ELSE
6 |   semester ← “Fall”
7 END
```

Algorithm 3.3: Example If-Else-If Statement

Let’s understand how this code works. First, the “if” and “else” keywords are used just as the two previous control structures, but we are now also using the “else if” keyword combination to specify an additional condition. Each condition, starting with the condition associated with the if-statement is checked in order. If and when one of the conditions is satisfied (evaluates to *true*), the code block associated with that condition is executed and *all other code blocks are ignored*.

Remember, each of the code blocks in an if-else-if control structure are mutually exclusive. One and *only* one of the code blocks will ever execute. Similar to the sequential control flow, the *first* condition that is satisfied is the one that executes. If *none* of the conditions is satisfied, then the code block associated with the else-statement is the one that is executed.

In our example, we only identified three possibilities. You can generalize an if-else-if statement to specify as many conditions as you like. This generalization is depicted in Algorithm 3.4 and visualized in Figure 3.3. Similar to the if-statement, the else-statement and subsequent code block is actually optional. If omitted, then it may be possible that *none* of the code blocks is executed.

```
1 IF (condition 1) THEN
2 |   Code Block A
3 ELSE IF (condition 2) THEN
4 |   Code Block B
5 ELSE IF (condition 3) THEN
6 |   Code Block C
7 ...
8 ELSE
9 |   Code Block
10 END
```

Algorithm 3.4: General If-Else-If Statement

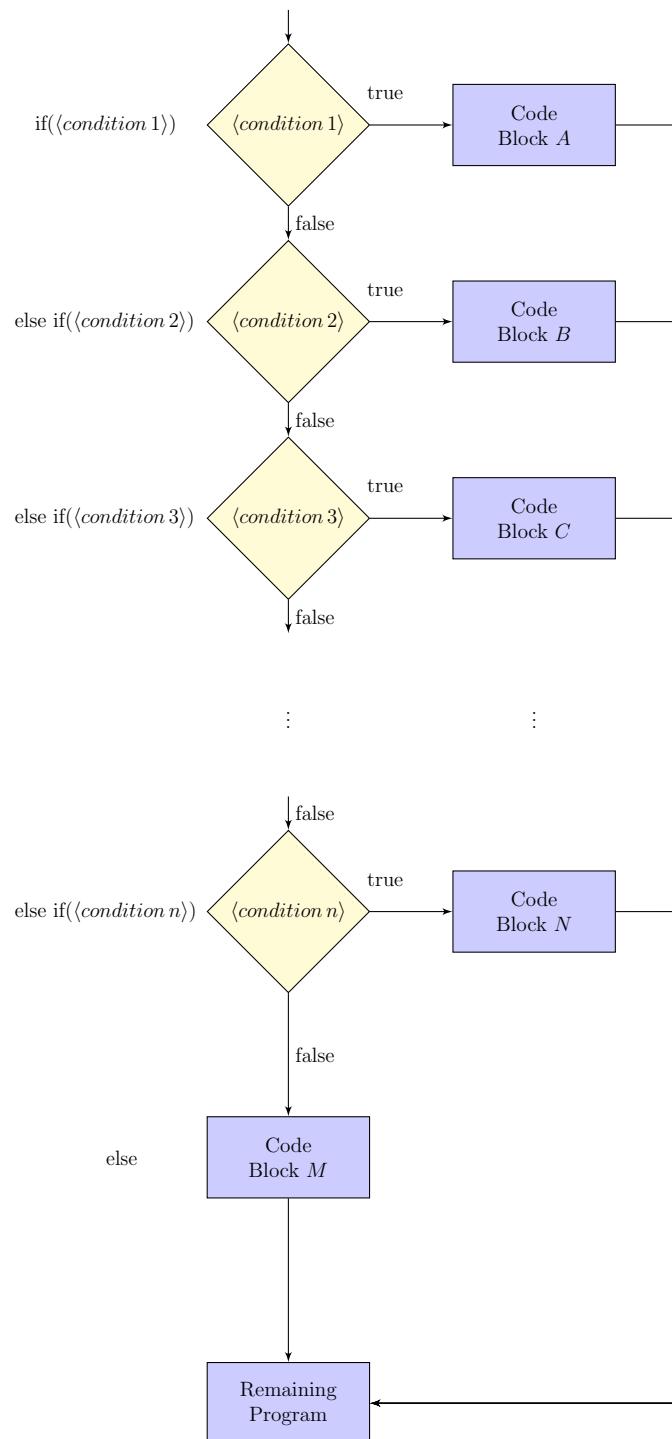


Figure 3.3.: Control Flow for an If-Else-If Statement. Each condition is evaluated in sequence. The first condition that evaluates to *true* results in the corresponding code block being executed. After executing, the program continues. Thus, each code block is *mutually exclusive*: at most *one* of them is executed.

3. Conditionals

The design of if-else-if statements must be done with care to ensure that your statements are each mutually exclusive and capture the logic you intend. Since the *first* condition that evaluates to *true* is the one that is executed, the *order* of the conditions is important. A poorly designed if-else-if statement can lead to [bugs](#) and logical errors.

As an example, consider describing the loudness of a sound by its *decibel* level in Algorithm 3.5.

```
1 IF decibel ≤ 70 THEN
2   | comfort ← “intrusive”
3 ELSE IF decibel ≤ 50 THEN
4   | comfort ← “quiet”
5 ELSE IF decibel ≤ 90 THEN
6   | comfort ← “annoying”
7 ELSE
8   | comfort ← “dangerous”
9 END
```

Algorithm 3.5: If-Else-If Statement With a Bug

Suppose that *decibel* = 20 which *should* be described as a “quite” sound. However, in the algorithm, the first condition, *decibel* ≤ 70 evaluates to *true* and the sound is categorized as “intrusive”. The bug is that the second condition, *decibel* ≤ 50 should have come *first* in order to capture all decibel levels less than or equal to 50.

Alternatively, we could have followed the example in Algorithm 3.3 and completely specified both lower bounds and upper bounds in our condition. For example, the condition for “intrusive” could have been

$$(\textit{decibel} > 50) \text{ AND } (\textit{decibel} \leq 70)$$

However, doing this is unnecessary if we order our conditions appropriately and we can potentially write simpler conditions if we keep the fact that the if-else-if statement is mutually exclusive.

3.5. Ternary If-Else Operator

Another conditional operator is the ternary if-then-else operator. It is often used to write an expression that can take on one of two values depending on the truth value of a logical expression. Most programming languages support this operator which has the following syntax:

E ? X : Y

Where **E** is a boolean expression. If **E** evaluates to *true*, the statement takes on the

value **X** which does not need to be a boolean value: it can be anything (an integer, string, etc.). If **E** evaluates to *false*, the statement takes on the value **Y**.

A simple usage of this expression is to find the minimum of two values:

```
min = ( (a < b) ? a : b );
```

If $a < b$ is true, then **min** will take on the value a . Otherwise it will take on the value b (in which case $a \geq b$ and so b is minimal).

Most programming languages support this special syntax as it provides a nice convenience (yet another example of *syntactic sugar*).

3.6. Examples

3.6.1. Meal Discount

Consider the problem of computing a receipt for a meal. Suppose we have the subtotal cost of all items in the meal. Further, suppose that we want to compute a discount (senior citizen discount, student discount, or employee discount, etc.). We can then apply the discount, compute the sales tax, and sum a total, reporting each detail to the user.

To do this, we first prompt the user to enter a subtotal. We can then ask the user if there is a discount to be computed. If the user answers yes, then we again prompt them for an amount (to allow different types of discounts). Otherwise, the discount will be zero. We can then proceed to calculate each of the amounts above. To do this we'll need an if-statement. We could also use a conditional statement to check to see if the input

3. Conditionals

makes sense: we wouldn't want a discount amount that is greater than 100% after all.

```
1 Prompt the user for a subtotal
2  $subTotal \leftarrow$  read input from user
3  $discountPercent \leftarrow 0$ 
4 Ask the user if they want to apply a discount
5  $hasDiscount \leftarrow$  get user input IF  $hasDiscount = \text{"yes"}$  THEN
6   | Prompt the user for a discount amount
7   |  $discountPercent \leftarrow$  read user input
8 END
9 IF  $discountPercent > 100$  THEN
10  | Error! Discount cannot be more than 100%
11 END
12  $discount \leftarrow subTotal \times discountPercent$ 
13  $discountTotal \leftarrow subTotal - discount$ 
14  $tax \leftarrow taxRate \times discountTotal$ 
15  $grandTotal \leftarrow discountTotal + tax$ 
16 output  $subTotal, discountTotal, tax, grandTotal$  to user
```

Algorithm 3.6: A simple receipt program

3.6.2. Look Before You Leap

Recall that dividing by zero is an invalid operation in most programming languages (see Section 2.3.5). Now that we have a means by which numerical values can be checked, we can *prevent* such errors entirely.

Suppose that we were going to compute a quotient of two variables x/y . If $y = 0$, this would be an invalid operation and lead to undefined, unexpected or erroneous behavior. However, if we checked whether or not the denominator is zero *before* we compute the quotient then we could prevent such errors. We present this idea in Algorithm 3.7.

```
1 IF  $y \neq 0$  THEN
2   |  $q \leftarrow x/y$ 
3 END
```

Algorithm 3.7: Preventing Division By Zero Using an If Statement

This approach to programming is known as **defensive programming**. We are essentially checking the conditions for an invalid operation *before* performing that operation. In the example above, we simply chose not to perform the operation. Alternatively, we

could use an if-else statement to perform alternate operations or *handle* the situation differently. Defensive programming is akin to “looking before leaping”: before taking another, potentially dangerous step, you look to see if you are at the edge of a cliff, and if so you don’t take that dangerous step.

3.6.3. Comparing Elements

Suppose we have two students, student *A* and student *B* and we want to compare them: we want to determine which one should be placed first in a list and which should be placed second. For this exercise let’s suppose that we want to order them first by their last names (so that Anderson comes before Zadora). What if they have the same last name, like Jane Smith and John Smith? If the last names are equal, then we’ll want to order them by their first names (Jane before John). If both their first names and last names are the same, we’ll say any order is okay.

Names will likely be represented using strings, so let’s say that $<$, $=$ and $>$ apply to strings, ordering them lexicographically (which is consistent with alphabetic ordering). We’ll first need to compare their last names. If equal, then we’ll need another conditional construct. This is achieved by *nesting* conditional statements as in Algorithm 3.8.

```

1 IF A's last name < B's last name THEN
2   |   output A comes first
3 ELSE IF A's last name > B's last name THEN
4   |   output B comes first
5 ELSE
6   |   //last names are equal, so compare their first names
7   |   IF A's first name < B's first name THEN
8   |   |   output A comes first
9   |   ELSE IF A's first name > B's first name THEN
10  |   |   output B comes first
11  |   ELSE
12  |   |   Either ordering is fine
13 END

```

Algorithm 3.8: Comparing Students by Name

3.6.4. Life & Taxes

Another example in which there are several cases that have to be considered is computing the income tax liability using marginal tax brackets. Table 3.6 contains the 2014 US

3. Conditionals

Federal tax margins and marginal rates for a married couple filing jointly based on the Adjusted Gross Income (income after deductions).

AGI is over	But not over	Tax
0	\$18,150	10% of the AGI
\$18,150	\$73,800	\$1,815 plus 15% of the AGI in excess of \$18,150
\$73,800	\$148,850	\$10,162.50 plus 25% of the AGI in excess of \$73,800
\$148,850	\$225,850	\$28,925 plus 28% of the AGI in excess of \$148,850
\$225,850	\$405,100	\$50,765 plus 33% of the AGI in excess of \$225,850
\$405,100	\$457,600	\$109,587.50 plus 35% of the AGI in excess of \$405,100
\$457,600	—	\$127,962.50 plus 39.6% of the AGI in excess of \$457,600

Table 3.6.: 2014 Tax Brackets for Married Couples Filing Jointly

In addition, one of the tax credits (which offsets tax liability) tax payers can take is the child tax credit. The rules are as follows:

- If the AGI is \$110,000 or more, they cannot claim a credit (the credit is \$0)
- Each child is worth a \$1,000 credit, however at most \$3,000 can be claimed
- The credit is not refundable: if the credit results in a negative tax liability, the tax liability is simply \$0

As an example: suppose that a couple has \$35,000 AGI and has two children. Their tax liability is

$$\$1,815 + 0.15 \times (\$35,000 - \$18,150) = \$4,342.50$$

However, the two children represent a \$2,000 refund, so their total tax liability would be \$2,342.50.

Let's first design some code that computes the tax liability based on the margins and rates in Table 3.6. We'll assume that the AGI is stored in a variable named *income*. Using a series of if-else-if statements as presented in Algorithm 3.9, the variable *tax* will

contain our initial tax liability.

```

1 IF  $income \leq 18,150$  THEN
2   |  $tax \leftarrow .10 \cdot income$ 
3 ELSE IF  $income > 18,150$  AND  $income \leq 73,800$  THEN
4   |  $tax \leftarrow 1,815 + .15 \cdot (income - 18,150)$ 
5 ELSE IF  $income > 73,800$  AND  $income \leq 148,850$  THEN
6   |  $tax \leftarrow 10,162.50 + .25 \cdot (income - 73,800)$ 
7 ELSE IF  $income > 148,850$  AND  $income \leq 225,850$  THEN
8   |  $tax \leftarrow 28,925 + .28 \cdot (income - 148,850)$ 
9 ELSE IF  $income > 225,850$  AND  $income \leq 405,100$  THEN
10  |  $tax \leftarrow 50,765 + .33 \cdot (income - 225,850)$ 
11 ELSE IF  $income > 405,100$  AND  $income \leq 457,600$  THEN
12  |  $tax \leftarrow 109,587.50 + .35 \cdot (income - 405,100)$ 
13 ELSE
14  |  $tax \leftarrow 127,962.50 + .396 \cdot (income - 457,600)$ 
15 END

```

Algorithm 3.9: Computing Tax Liability with If-Else-If

To compute the amount of a tax credit and adjust the tax accordingly by using similar if-else-if and if-else statements as in Algorithm 3.10.

```

1 IF  $income \geq 110000$  THEN
2   |  $credit \leftarrow 0$ 
3 ELSE IF  $numberOfChildren \leq 3$  THEN
4   |  $credit \leftarrow numberOfChildren * 1000$ 
5 ELSE
6   |  $credit \leftarrow 3000$ 
7 END
   //Now adjust the tax, taking care that its a nonrefundable credit
8 IF  $credit > tax$  THEN
9   |  $tax \leftarrow 0$ 
10 ELSE
11  |  $tax \leftarrow tax - credit$ 
12 END

```

Algorithm 3.10: Computing Tax Credit with If-Else-If

3.7. Exercises

Exercise 3.1. Write a program that prompts the user for an x and a y coordinate in the Cartesian plane and prints out a message indicating if the point (x, y) lies on an axis (x or y axis, or both) or what quadrant it lies in (see Figure 3.4).

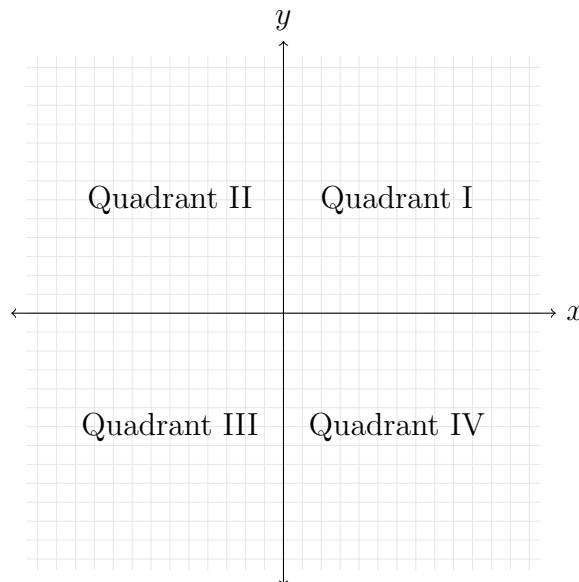


Figure 3.4.: Quadrants of the Cartesian Plane

Exercise 3.2. A BOGO (Buy-One, Get-One) sale is a promotion in which a person buys two items and receives a 50% discount on the less expensive one. Write a program that prompts the user for the cost of two items, computes a 50% discount on the less expensive one, and then computes a grand total.

Exercise 3.3. Write a program that will calculate and print a bill for the city power company. The rates vary depending on whether the use is residential, commercial, or industrial. The program should prompt the user to indicate which type the customer is as well as a total kilowatt hour (kWh) used and compute the total based on the rates in Table 3.7.

Type	Base	Rate
Residential	\$24.50	\$0.1415 per kWh
Commercial	\$75.00	\$0.1750 per kWh
Industrial	\$245.00	\$0.2774 per kWh

Table 3.7.: Rates per kWh for each type of customer

Each customer is assessed a *base* cost of service regardless of how much electricity they use. In addition, if industrial customers use more than 2000 kWh, they are assessed an additional \$0.05 per kWh.

Exercise 3.4. Various substances have different boiling points. A selection of substances and their boiling points can be found in Table 3.8. Write a program that prompts the user for the observed boiling point of a substance in degrees Celsius and identifies the substance if the observed boiling point is within 5% of the expected boiling point. If the data input is more than 5% higher or lower than any of the boiling points in the table, it should output **Unknown substance**.

Substance	Boiling Point (C)
Methane	-161.7
Butane	-0.5
Water	100
Nonane	150.8
Mercury	357
Copper	1187
Silver	2193
Gold	2660

Table 3.8.: Expected Boiling Points

Exercise 3.5. Electrical resistance in various metals can be measured using nano-ohm metres ($n\Omega \cdot m$). Table 3.9 gives the resistivity of several metals.

Material	Resistivity ($n\Omega \cdot m$)
Copper	16.78
Aluminum	26.50
Beryllium	35.6
Potassium	72.0
Iron	96.10

Table 3.9.: Resistivity of several metals

Write a program that prompts the user for an observed resistivity of an unknown material (as nano-ohm metres) and identifies the substance if the observed resistivity is within $\pm 3\%$ of the known resistivity of any of the materials in Table 3.9. If the input value lies outside the $\pm 3\%$ range, output **Unknown substance**.

Exercise 3.6. The visible light spectrum is measured in nanometer (nm) frequencies. Ranges roughly correspond to visible colors as depicted in Table 3.10.

Write a program that takes an integer corresponding to a wavelength and outputs the corresponding color. If the value lies outside the ranges it should output **Not a visible wavelength**. If a value lies within multiple color ranges it should print all that apply (for example, a wavelength of 495 is “Indigo-green”).

Exercise 3.7. A certain production of steel is graded according to the following conditions:

3. Conditionals

Color	Wave length range (nm)
Violet	380 – 450
Blue	450 – 475
Indigo	476 – 495
Green	495 – 570
Yellow	570 – 590
Orange	590 – 620
Red	620 - 750

Table 3.10.: Visible Light Spectrum Ranges

- (i) Hardness must be greater than 50
- (ii) Carbon content must be less than 0.7
- (iii) Tensile strength must be greater than 5600

A grade of 5 thru 10 is assigned to the steel according to the conditions in Table 3.11. Write a program that will read in the hardness, carbon content, and tensile strength as

Grade	Conditions
10	All three conditions are met
9	Conditions (i) and (ii) are met
8	Conditions (ii) and (iii) are met
7	Conditions (i) and (iii) are met
6	If only 1 of the three conditions is met
5	If none of the conditions are met

Table 3.11.: Grades of Steel

inputs and output the corresponding grade of the steel.

Exercise 3.8. A triangle can be characterized in terms of the length of its three sides. In particular, an *equilateral* triangle is a triangle with all three sides being equal. A triangle such that two sides have the same length is *isosceles* and a triangle with all three sides having a different length is *scalene*. Examples of each can be found in Figure 3.5.

In addition, the three sides of a triangle are *valid* only if the sum of any two sides is strictly greater than the third length.

Write a program to read in three numbers as the three sides of a triangle. If the three sides do not form a valid triangle, you should indicate so. Otherwise, if valid, your program should output whether or not the triangle is equilateral, isosceles or scalene.

Exercise 3.9. Body Mass Index (BMI) is a healthy statistic based on a person's mass and height. For a healthy adult male BMI is calculated as

$$\text{BMI} = \frac{m}{h^2} \cdot 703.069579$$

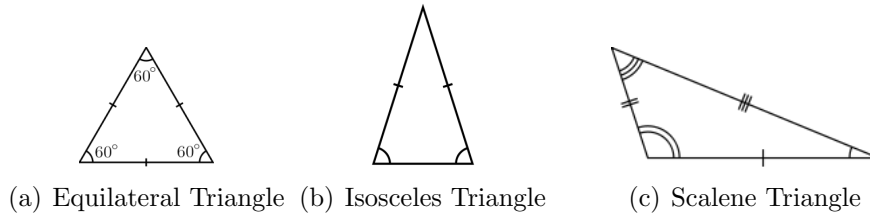


Figure 3.5.: Three types of triangles

where m is the person's mass (in lbs) and h is the person's height (in whole inches). Write a program that reads in a person's mass and height as input and outputs a characterization of the person's health with respect to the categories in Table 3.12.

Range	Category
$\text{BMI} < 15$	Very severely underweight
$15 \leq \text{BMI} < 16$	Severely underweight
$16 \leq \text{BMI} < 18.5$	Underweight
$18.5 \leq \text{BMI} < 25$	Normal
$25 \leq \text{BMI} < 30$	Overweight
$30 \leq \text{BMI} < 35$	Obese Class I
$35 \leq \text{BMI} < 40$	Obese Class II
$\text{BMI} \geq 40$	Obese Class III

Table 3.12.: BMI Categories

Exercise 3.10. Let R_1 and R_2 be rectangles in the plane defined as follows. Let (x_1, y_1) be point corresponding to the lower-left corner of R_1 and let (x_2, y_2) be the point of its upper-right corner. Let (x_3, y_3) be point corresponding to the lower-left corner of R_2 and let (x_4, y_4) be the point of its upper-right corner.

Write a program to determine the *intersection* of these two rectangles. In general, the intersection of two rectangles is another rectangle. However, if the two rectangles abut each other, the intersection could be a horizontal or vertical line segment (or even a point). It is also possible that the intersection is *empty*. Your program will need to distinguish between these cases.

If the intersection of R_1, R_2 is a rectangle, R_3 , your program should output two points (the lower-left and upper-right corners of R_3) as well as the *area* of R_3 . If the intersection is a line segment, your program should output the two *end-points* and whether it is a vertical or horizontal line segment. Finally, if the intersection is empty your program should output “empty intersection”. Your program should also be robust enough to check that the input is valid (it should not accept empty or “reversed” rectangles).

Your program should read in $x_1, y_1, x_2, y_2, x_3, y_3, x_4, y_4$ from the user and perform the computation above. As an example, the values 2, 1, 6, 7.5, 4, 5.5, 8.5, 8.25 would correspond

3. Conditionals

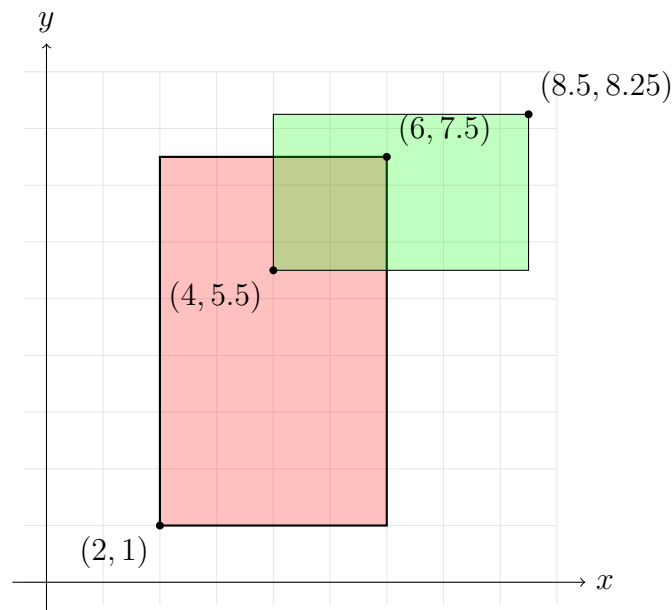


Figure 3.6.: Intersection of Two Rectangles

to the two rectangles in Figure 3.6.

The output for this instance should look something like the following.

```
Intersecting rectangle: (4, 5.5), (6, 7.5)
Area: 4.00
```

Exercise 3.11. Write an app to help people track their cell phone usage. Cell phone plans for this particular company give you a certain number of minutes every 30 days which must be used or they are lost (no rollover). We want to track the average number of minutes used per day and inform the user if they are using too many minutes or can afford to use more.

Write a program that prompts the user to enter the following pieces of data:

- Number of minutes in the plan per 30 day period, m
- The current day in the 30 day period, d
- The total number of minutes used so far u

The program should then compute whether the user is over, under, or right on the average daily usage under the plan. It should also inform them of how many minutes are left and how many, on average, they can use per day for the rest of the month. Of course, if they've run out of minutes, it should inform them of that too.

For example, if the user enters $m = 250$, $d = 10$, and $u = 150$, your program should print out something similar to the following.


```
10 days used, 20 days remaining
Average daily use: 15 min/day
```

```
You are EXCEEDING your average daily use (8.33 min/day),
continuing this high usage, you'll exceed your minute plan by
200 minutes.
```

```
To stay below your minute plan, use no more than 5 min/day.
```

Of course, if the user is under their average daily use, a different message should be presented. You are allowed/encouraged to compute any other stats for the user that you feel would be useful.

Exercise 3.12. Write a program to help a floor tile company determine how many tiles they need to send to a work site to tile a floor in a room. For simplicity, assume that all rooms are perfectly rectangular with no obstructions; we will also omit any additional measurements related to grouting.

Further, we will assume that all tile is laid in a grid pattern centered at the center of the room. That is, four tiles will meet at their corners at the center of the room with tiles laid out to the edge of the room. Thus, it may be the case that the final row and/or column at the edge may need to be cut. Also note that if the cut is short enough, the remaining tile can be used on the other end of the room (same goes for the corners).

The program will take the following input:

- w - the width of the room
- l - the length of the room
- t - width/length of the tile (all tiles are perfectly square)

If we can use whole tiles to perfectly fit the room, then we do so. For example, on the input (10, 10, 1), we could perfectly tile a 10×10 room with 100 1×1 tiles. If the tiles don't perfectly fit, then we have to consider the possibility of waste and/or reuse. Consider the examples in Figure 3.7.

The first example is from the input (9.8, 100, 1). In this case, we lay the tiles from the center of the room (8 full tile lengths) but are left with 0.9 on either side. If we cut a tile to fit the left side, we are left with only .1 tile which is too short for the right side. Therefore, we are forced to waste the 0.1 length and cut a full tile for the right side. In all, 100 tiles are required.

The second example is from the input (8.8, 100, 1). In this case, we again lay tiles from the center of the room (8 full tile lengths) and are left with 0.4 lengths on either side. Here, we *can* reuse the cut tile: cut a tile on one side 0.4 with 0.6 remaining, and cut 0.4 on the other side of the tile (with the center 0.2 length of the tile being waste). Thus, both sides can be tiled with a single tile, meaning only 90 full tiles are needed to tile this room.

3. Conditionals

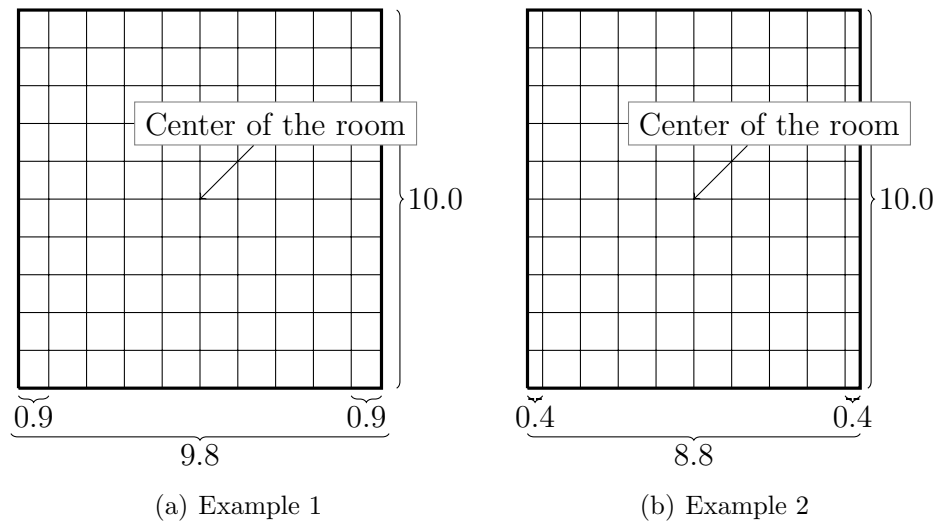


Figure 3.7.: Examples of Floor Tiling

You may further assume that tiles used on the length-side end of the room *cannot* be used to tile the width-side of the room (and vice versa). Your program will compute and output the number of tiles required.

4. Loops

Computers are really good at automation. A key aspect of automation is that we be able to repeat a process over and over on different pieces of data until some condition is met. For example, if we have a collection of numbers and we want to find their sum we would *iterate* over each number, adding it to a total, until we have examined every number. Another example may include sending an email message to each student in a course. To automate the process, we could iterate over each student record and *for each* student we would generate and send the email.

Automated repetition is where *loops* come in handy. Computers are perfectly suited for performing such repetitive tasks. We can write a single block of code that performs some action or processes a single piece of data, then we can write a loop around that block of code to execute it a number of times.

Loops provide a much better alternative than repeating (cut-paste-cut-paste) the same code over and over with different variables. Indeed, we wouldn't even do this in real life. Suppose that you took a 100 mile trip. How would you describe it? Likely, you wouldn't say, "I drove a mile, then I drove a mile, then I drove a mile, ..." repeated 100 times. Instead, you would simply state "I drove 100 miles" or maybe even, "I drove until I reached my destination."

Loops allow us to write concise, repeatable code that can be applied to each element in a collection or perform a task over and over again until some condition is met. When writing a loop, there are three essential components:

- An *initialization* statement that specifies how the loop begins
- A *continuation* (or *termination*) condition that specifies whether the loop should continue to execute or terminate
- An *iteration* statement that makes progress toward the termination condition

The initialization statement is executed before the loop begins and serves as a way to set the loop up. Typically, the initialization statement involves setting the initial value of some variable.

The continuation statement is a logical statement (that evaluates to *true* or *false*) that specifies if the loop should continue (if the value is *true*) or should terminate (if the value is *false*). Upon termination, code returns to a sequential control flow and the program continues.

4. Loops

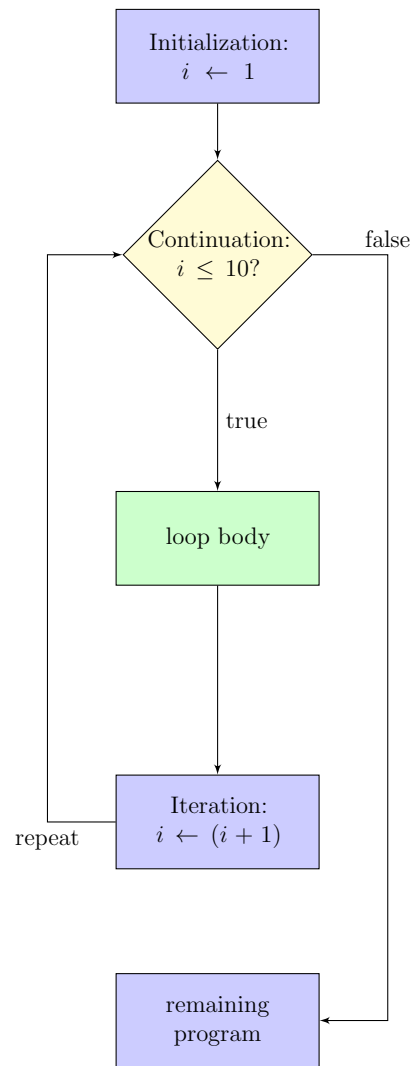


Figure 4.1.: A Typical Loop Flow Chart

The iteration statement is intended to update the state of a program to make progress toward the termination condition. If we didn't make such progress, the loop would continue on forever as the termination condition would never be satisfied. This is known as an *infinite loop*, and results in a program that never terminates.

As a simple example, consider the following outline.

- Initialize the value of a variable i to 1
- While the value of i is less than or equal to 10... (continuation condition)
- Perform some action (this is sometimes referred to as the *loop body*)
- Iterate the variable i by adding one to its value

The code outline above specifies that some action is to be performed once for each value: $i = 1, i = 2, \dots, i = 10$, after which the loop terminates. Overall, the loop executes a total of 10 times. Prior to each of the 10 executions, the value of i is checked; as it is less than or equal to 10, the action is performed. At the end of each of the 10 iterations, the variable i is incremented by 1 and the termination condition is checked again, repeating the process.

There are several different types of loops that vary in syntax and style but they all have the same three basic components.

4.1. While Loops

A *while loop* is a type of loop that places the three components in their logical order. The initialization statement is written before the loop code. Typically the keyword *while* is used to specify the continuation/termination condition. Finally, the iteration statement is usually performed at the end of the loop *inside* the code block associated with the loop. A small, counter-controlled while loop is presented in Algorithm 4.1 which illustrates the previous example of iterating a variable i from 1 to 10.

```

1  $i \leftarrow 1$  //Initialization statement
2 WHILE  $i \leq 10$  DO
3   |   Perform some action
4   |    $i \leftarrow (i + 1)$  //Iteration statement
5 END
```

Algorithm 4.1: Counter-Controlled While Loop

Prior to the WHILE statement, the variable i is initialized to 1. This action is only performed once and it is done so before the loop code. Then, before the loop code is executed, the continuation condition is checked. Since $i = 1 \leq 10$, the condition evaluates

4. Loops

to *true* and the loop code block is executed. The last line of the code block is the iteration statement, where i is incremented by 1 and now has a value of 2. The code returns to the *top* of the loop and again evaluates the continuation condition (which is still true as $i = 2 \leq 10$).

On the 10th iteration of the loop when $i = 10$, the loop will execute for the last time. At the end of the loop, i is incremented to 11. The loop *still* returns to the top and the continuation condition is *still* checked one last time. However, since $i = 11 \not\leq 10$, the condition is now *false* and the loop terminates. Regular sequential control flow returns and the program continues executing whatever code is specified after the loop.

4.1.1. Example

In the previous example we knew how many times we wanted the loop to execute. Though you can use a while loop in counter-controlled situations, while loops are typically used in scenarios when you may not know how many iterations you want the loop to execute for. Instead of a straightforward iteration, the loop itself may update a variable in a less-than-predictable manner.

As an example, consider the problem of *normalizing* a number as is typically done in scientific notation. Given a number x (for simplicity, we'll consider $x \geq 0$), we divide it by 10 until its value is in the interval $[0, 10)$, keeping track of how many times we've divided by 10. For example, if we have the number $x = 32,145.234$, we would divide by 10 four times, resulting in 3.2145234 so that we could express it as

$$3.2145234 \times 10^4$$

A simple realization of this process is presented in Algorithm 4.2. The number of times the loop executes depends on how large x is. For the example mentioned, it executes 4 times; for an input of $x = 10,000,000$ it would execute 7 times. A while loop allows us to specify the repetition process without having to know up front how many times it will execute.

```
INPUT   : A number  $x$ ,  $x \geq 0$ 
1  $k \leftarrow 0$ 
2 WHILE  $x > 10$  DO
3    $x \leftarrow (x/10)$ 
4    $k \leftarrow (k + 1)$ 
5 END
6 output  $x, k$ 
```

Algorithm 4.2: Normalizing a Number With a While Loop

4.2. For Loops

A *for loop* is similar to a while loop but allows you to specify the three components on the same line. In many cases, this results in a loop that is more readable; if the code block in a while loop is long it may be difficult to see the initialization, continuation, and iteration statements clearly. For loops are typically used to iterate over elements stored in a collection such as an array (see Chapter 7).

Usually the keyword *for* is used to identify all three components. A general example is given in Algorithm 4.3.

```

1 FOR (initialization statement); (continuation condition); (iteration statement) DO
2   |   Perform some action
3 END

```

Algorithm 4.3: A General For Loop

Note the additional syntax: in many programming languages, semicolons are used at the end of executable statements. Semicolons are also used to delimit each of the three loop components in a for-loop (otherwise there may be some ambiguity as to where each of the components begins and ends). However, the semicolons are typically only placed after the initialization statement and continuation condition and are *omitted* after the iteration statement. A more concrete example is given in Algorithm 4.4 which represents an equivalent code snippet as the counter-controlled while loop we examined earlier.

```

1 FOR  $i \leftarrow 1$ ;  $i \leq 10$ ;  $i \leftarrow (i + 1)$  DO
2   |   Perform some action
3 END

```

Algorithm 4.4: Counter-Controlled For Loop

Though all three components are written on the same line, the initialization statement is only ever executed once; at the beginning of the loop. The continuation condition is checked prior to each and every execution of the loop. Only if it evaluates to *true* does the loop body execute. The iteration condition is performed *at the end* of each loop iteration.

4.2.1. Example

As a more concrete example, consider Algorithm 4.5 in which we do the same iteration (i will take on the values $1, 2, 3, \dots, 10$), but in each iteration we add the value of i *for that iteration* to a running total, *sum*.

4. Loops

```
1  $sum \leftarrow 0$ 
2 FOR  $i \leftarrow 1; i \leq 10; i \leftarrow (i + 1)$  DO
3   |  $sum \leftarrow (sum + i)$ 
4 END
```

Algorithm 4.5: Summation of Numbers in a For Loop

Again, the initialization of $i = 1$ is only performed once. On the first iteration of the loop, $i = 1$ and so sum will be given the value $sum + i = 0 + 1 = 1$. At the end of the loop, i will be incremented and will have a value of 2. The continuation condition is still satisfied, so once again the loop body executes and sum will be given the value $sum + i = 1 + 2 = 3$. On the 10th (last) iteration, sum will have a value $1 + 2 + 3 + \dots + 9 = 45$ and $i = 10$. Thus $sum + i = 45 + 10 = 55$ after which i will be incremented to 11. The continuation condition is *still* checked, but since $11 \not\leq 10$, the loop body will not be executed and the loop will terminate.

4.3. Do-While Loops

Yet another type of loop is the *do-while* loop. One major difference between this type of loop and the others is that it is always executed *at least once*. The way that this is achieved is that the continuation condition is checked *at the end* of the loop rather than prior to its execution. The same counter-controlled example can be found in Algorithm 4.6.

```
1  $i \leftarrow 1$ 
2 DO
3   | Perform some action
4   |  $i \leftarrow (i + 1)$ 
5 WHILE  $i \leq 10$ 
```

Algorithm 4.6: Counter-Controlled Do-While Loop

In contrast to the previous examples, the loop body is executed on the first iteration without checking the continuation condition. Only after the loop body, including the incrementing of the iteration variable i is the continuation condition checked. If *true*, the loop repeats at the beginning of the loop body.

Do-while loops are typically used in scenarios in which the first iteration is used to “setup” the continuation condition (thus, it needs to be executed at least once). A common example is if the loop body performs an operation that may have result in an error code

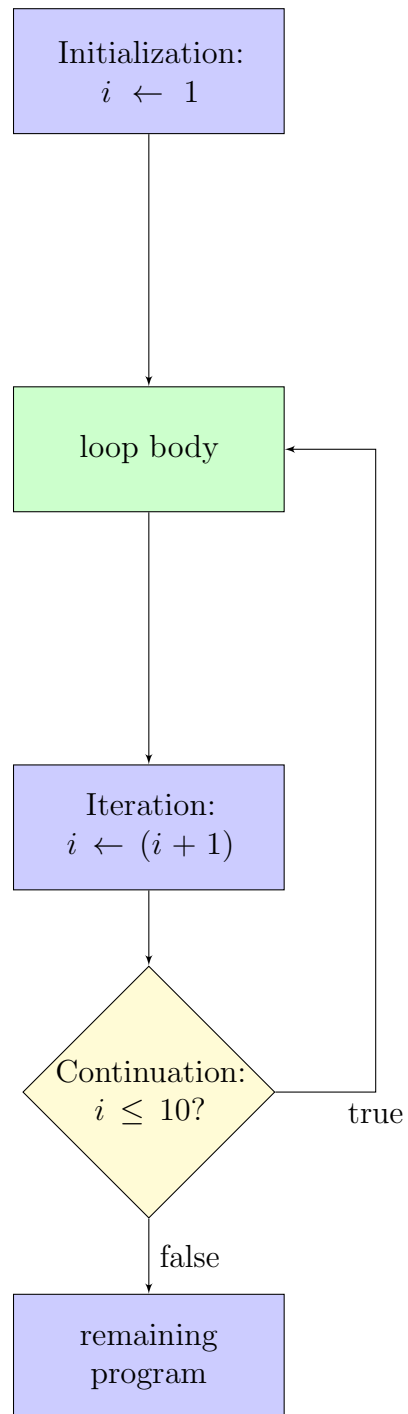


Figure 4.2.: A Do-While Loop Flow Chart. The continuation condition is checked *after* the loop body.

(or flag) that is either *true* (an error occurred) or *false* (no error occurred).

From this perspective, a do-while loop can also be seen as a do-until loop: perform a

4. Loops

```
1 DO
2   | Read some data
3   | isError ← result of reading
4 WHILE isError
```

Algorithm 4.7: Flag-Controlled Do-While Loop

task *until* some condition is no longer satisfied. The subtle wording difference implies that we'll perform the action before checking to see if it should be performed again.

4.4. Foreach Loops

Many languages support a special type of loop for iterating over individual elements in a collection (such as a set, list, or array). In general, such loops are referred to as *foreach* loops. These types of loops are essentially [syntactic sugar](#): iterating over a collection could be achieved with a for loop or a while loop, but foreach loops provide a more convenient way to iterate when dealing with collections. We will revisit these loops when we examine arrays in Chapter 7. For now, we look at a simple example in Algorithm 4.8.

```
1 FOREACH element a in the collection A DO
2   | process the element a
3 END
```

Algorithm 4.8: Example Foreach Loop

How the elements are stored in the collection and how they are iterated over is not our (primary) concern. We simply want to apply the same block of code to each element, the foreach loop handles the details on how each element is iterated over. The syntax also provides us a way to refer to each element (the *a* variable in the algorithm). On each iteration of the loop, the foreach loop updates the reference *a* to the *next* element in the array. The loop terminates after it has iterated through each and every one of the elements. In this way, a foreach loop simplifies the syntax: we don't have to specify any of the three components ourselves. This is very convenient. As a more concrete example, consider iterating over each student in a course roster. For each student, we wish to compute their grade and then email them the results. The foreach loop allows us to do this without worrying about the iteration details (see Algorithm 4.9).

```

1 FOREACH student s in the class C DO
2   |  $g \leftarrow$  compute  $a$ 's grade
3   | send  $a$  an email informing them of their grade  $g$ 
4 END

```

Algorithm 4.9: Foreach Loop Computing Grades

4.5. Other Issues

4.5.1. Nested Loops

Just as with conditional statements, we can nest loops within loops to perform more complex processes. Though you can do this with any type of loop, we present a simple example using for loops in Algorithm 4.10.

```

1  $n \leftarrow 10$ 
2  $m \leftarrow 20$ 
3 FOR  $i \leftarrow 1; i \leq m; i \leftarrow (i + 1)$  DO
4   | FOR  $j \leftarrow 1; j \leq n; j \leftarrow (j + 1)$  DO
5   |   | output  $(i, j)$ 
6   | END
7 END

```

Algorithm 4.10: Nested For Loops

The outer for loop executes a total of 20 times while the inner for loop executes 10 times. Since the inner for loop is *nested* inside the outer loop, the entire inner loop executes all 10 iterations *for each* of the 20 iterations of the outer loop. Thus, in total the inner most output operation executes $10 \times 20 = 200$ times. Specifically, it outputs $(1, 1), (1, 2), \dots, (1, 10), (2, 1), (2, 2), \dots, (2, 10), (3, 1), \dots, (20, 10)$.

Some common use cases for nested loops are when you process two dimensional data such as data found in a table that includes rows and columns. Processing matrices is another common use case. Finally, nested loops can be used to process all *pairs* in a collection of elements.

4.5.2. Infinite Loops

Sometimes a simple mistake in the design of a loop can make it execute forever. For example, if we accidentally iterate a variable in the wrong direction or write the *opposite*

4. Loops

termination/continuation condition. Such a loop is referred to as an *infinite loop*. As an example, suppose we forgot the increment operation from a previous example.

```
1  $sum \leftarrow 0$ 
2  $i \leftarrow 1$ 
3 WHILE  $i \leq 10$  DO
4    $sum \leftarrow (sum + i)$ 
5 END
```

Algorithm 4.11: Infinite Loop

In Algorithm 4.11 we never make progress toward the terminating condition! Thus, the loop will execute forever, i will continue to have the value 0 and since $0 \leq 10$, the loop body will continue to execute. Care is needed in the design of your loops to ensure that they make progress toward the termination condition.

Most of the time an infinite loop is not something you want and usually you must terminate your buggy program externally (sometimes referred to as “killing” it). However, infinite loops do have their uses. A *poll* loop is a loop that is *intended* to not terminate. At a system level, for example, a computer may *poll* devices (such as input/output devices) one-by-one to see if there is any active input/output request. Instead of terminating, the poll loop simply repeats itself, returning back to the first device. As long as the computer is in operation, we don’t want this process to stop. This can be viewed as an infinite loop as it doesn’t have any termination condition.

The Zune Bug

Though proper testing and debugging should reduce the likelihood of such bugs, there are several notable instances in which an infinite loop impacted real software. One such instance was the Microsoft *Zune* bug. The Zune was a portable music player, a competitor to the iPod. At about midnight on the night of December 31st, 2008, Zunes everywhere failed to startup properly. A firmware clock driver designed by a 3rd party company contained the following code.

```

1  while(days > 365) {
2      if(IsLeapYear(year)) {
3          if(days > 366) {
4              days -= 366;
5              year += 1;
6          }
7      } else {
8          days -= 365;
9          year += 1;
10     }
11 }

```

Code Sample 4.1: Zune Bug

2008 was a leap year, so the check on line 2 evaluated to *true*. However, though December 31st, 2008 was the 366th day of the year (`days = 366`) the third line evaluated to *false* and the loop was repeated without any of the program state being updated. The problem was “fixed” 24 hours later when it was the 367th day and line 3 worked. The problem was that line 3 *should* have been `days >= 366`).

The failure was that this code was never tested on the “corner cases” that it was designed for. No one thought to test the driver to see if it worked on the last day of a leap year. The code worked the vast majority of the time, but this illustrates the need for rigorous testing.

4.5.3. Common Errors

When writing loops its important to use the proper syntax in the language in which you are coding. Many languages use semicolons to terminate executable statements. However, the `while` statements are not executable: they are part of the control structure of the language and do not have semicolons at the end. A misplaced semicolon could be a syntax error, or it could be syntactically correct but lead to incorrect results. A common error is to place a semicolon at the end of a `while` statement as in

```
while(count <= 10); //WRONG!!!
```

In this example, the `while` loop binds to an *empty* executable statement and results in an infinite loop!

Other common errors are the result of misidentifying either the initialization statement or the continuation condition. Starting a counter at 1 instead of zero, or using a \leq comparison instead of a $<$, etc. These can lead to a loop being *off-by-one* and a resulting error.

Other errors can be avoided by using the proper types of variables. Recall that operations

4. Loops

involving floating-point numbers can have round off and precision errors, $\frac{1}{3} + \frac{1}{3} + \frac{1}{3}$ may not be equal to one for example. It is best to avoid using floating-point numbers or comparisons in the control of your loops. Boolean and integer types are much less error prone.

Finally, you must always ensure that your loops are making progress *toward* the termination condition. A failure to properly increment a counter can lead to incorrect results or even an infinite loop.

4.5.4. Equivalency of Loops

It might not seem obvious at first, but in fact, *any* type of loop can be re-written as another type of loop and perform *equivalent* operations. That is, any while loop can be rewritten as an equivalent for loop. Any do-while loop can be rewritten as an equivalent while loop!

So why do we have different types of loops? The short answer is that we want our programming languages to be as flexible as possible. We could design a language in which every loop *had* to be a while loop for example, but there are some situations in which it would be less “natural” to write code with a while loop. By providing several options, programmers have the choice of which type of loop to write.

In general, there are no “rules” as to which loop to apply to which situation. There are general trends, best practices, and situations where it is more common to use one loop rather than another, but in the end it does come down to personal choice and style. Some software projects or organizations may have established guidelines or accepted style that may need to be followed in the interest of consistency and uniformity.

4.6. Problem Solving With Loops

Loops can be applied to any problem that requires repetition of some sort or two simplify repeated code. When designing loops, it is important to identify the three components by asking the questions:

- Where does the loop start? What variables or other state may need to be initialized or setup prior to the loop beginning?
- What code needs to be repeated? How can it be generalized to depend on loop control variables? This helps you to identify and write the loop body.
- When should the loop end? How many times do we want it to execute? This helps you to identify the continuation and/or termination condition.
- How do we make progress toward the termination condition? What variable(s) need to be incremented and how?

4.7. Examples

4.7.1. For vs While Loop

Recall the classic geometric series,

$$\frac{1}{1-x} = \sum_{k=0}^{\infty} x^k = 1 + x + x^2 + x^3 + \dots$$

Obviously a computer cannot compute an infinite series as it is required to terminate in a finite number of steps. Thus, we can approach this problem in a number of different ways.

One way we could approximate the series is to compute it out to a fixed, say n , number of terms. To do so, we could initialize a *sum* variable to zero, then iteratively compute and add terms to the *sum* until we have computed n terms. To keep track of the terms, we can define a counter variable, k as in the summation.

Following our strategy, we can identify the initialization: k should start at 0. The iteration is also easy: k should be incremented by 1 each time. The continuation condition should continue the loop until we have computed n terms. However, since k starts at 0, we would want to continue while $k < n$. We would not want to continue the iteration when $k = n$ as that would make $n + 1$ iterations (again since k starts at 0). Further, since we know the number of iterations we want to execute, a for loop is arguably the most appropriate loop for this problem. Such a solution is presented in Algorithm 4.12.

```

INPUT    :  $x, n \geq 0$ 
1  $sum \leftarrow 0$ 
2 FOR  $k = 0; k < n; k \leftarrow (k + 1)$  DO
3   |  $sum \leftarrow (sum + x^k)$ 
4 END
5 output  $sum$ 
```

Algorithm 4.12: Computing the Geometric Series Using a For Loop

As an alternative consider the following approach: instead of computing a predefined number of terms, what if we computed terms until the difference between the value in the previous iteration and the value in the current iteration is negligible, say less than some small ϵ amount. We could stop our computation because any further iterations would only affect the summation less and less. That is, the current value represents a “good enough” approximation. That way, if someone wanted an even better approximation, they could specify a smaller ϵ .

This approach will be more straightforward with a while loop since the continuation condition will be more along the lines of “while the estimation is not yet good enough,

4. Loops

continue the summation.” This approach will also be easier if we keep track of both a *current* and a *previous* value of the summation, then computing and checking the difference will be easier.

```
INPUT :  $x, \epsilon > 0$ 
1  $sum_{prev} \leftarrow 0$ 
2  $sum_{curr} \leftarrow 1$ 
3  $k \leftarrow 1$ 
4 WHILE  $|sum_{prev} - sum_{curr}| \geq \epsilon$  DO
5    $sum_{prev} \leftarrow sum_{curr}$ 
6    $sum_{curr} \leftarrow (sum_{curr} + x^k)$ 
7    $k \leftarrow (k + 1)$ 
8 END
9 output  $sum$ 
```

Algorithm 4.13: Computing the Geometric Series Using a While Loop

4.7.2. Primality Testing

An integer $n > 1$ is called *prime* if the only integers that divide it are 1 and itself. Otherwise it is called *composite*. For example, 30 is composite as it is divisible by 2, 3, and 5 among others. However, 31 is prime as it is only divisible by 1 and 31.

Consider the problem of determining whether or not a given integer n is prime or composite, referred to as *primality testing*. A straightforward way of determining this is to simply try dividing by every integer 2 up to \sqrt{n} : if any of these integers divides n , then n is composite. Otherwise, if none of them do, n is prime. Observe that we only need to go up to \sqrt{n} since any prime divisor greater than that will correspond to *some* prime divisor less than \sqrt{n} .

A for loop can thus be constructed: our initialization clearly starts at $i = 2$, incrementing by 1 each time until i has exceeded \sqrt{n} . This solution is presented in Algorithm 4.14. Of course this is certainly not the most efficient way to solve this problem, but we will not go into more advanced algorithms here.

Now consider this more general problem: given an integer $m > 1$, determine *how many* prime numbers $\leq m$ there are. A key observation is that we’ve *already solved* part of the problem: determining if a given number is prime in the previous exercise. To solve this problem, we could *reuse* or adapt our previous solution. In particular, we could surround the previous solution in an *outer* loop and iterate over integers from 2 up to m . The inner loop would then determine if the integer is prime and instead of outputting a result, could keep track of a counter of the number of primes. This solution is presented


```

INPUT  :  $n > 1$ 
1 FOR  $i \leftarrow 2; i \leq \sqrt{n}; i \leftarrow (i + 1)$  DO
2   | IF  $i$  divides  $n$  THEN
3   |   output composite
4   | END
5 END
6 output prime

```

Algorithm 4.14: Determining if a Number is Prime or Composite

in Algorithm 4.15.

```

INPUT  :  $m > 1$ 
1  $numberOfPrimes \leftarrow 0$ 
2 FOR  $j = 2; j \leq m; j \leftarrow (j + 1)$  DO
3   |  $isPrime \leftarrow true$ 
4   | FOR  $i \leftarrow 2; i \leq \sqrt{j}; i \leftarrow (i + 1)$  DO
5   |   | IF  $i$  divides  $j$  THEN
6   |   |    $isPrime \leftarrow false$ 
7   |   | END
8   | END
9   | IF  $isPrime$  THEN
10  |   |  $numberOfPrimes \leftarrow (numberOfPrimes + 1)$ 
11  |   | END
12 END
13 output  $numberOfPrimes$ 

```

Algorithm 4.15: Counting the number of primes.

4.7.3. Paying the Piper

Banks issue loans to customers as one lump sum called a *principle* P that the borrower must pay back over a number of *terms*. Usually payments are made on a monthly basis. Further, banks charge an amount of *interest* on a loan measured as an Annual Percentage Rate (APR). Given these conditions, the borrower makes monthly payments determined by the following formula.

$$monthlyPayment = \frac{iP}{1 - (1 + i)^{-n}}$$

Where $i = \frac{apr}{12}$ is the monthly interest rate, and n is the number of terms (in months).

4. Loops

For simplicity, suppose we borrow $P = \$1,000$ at 5% interest ($apr = 0.05$) to be paid back over a term of 2 years ($n = 24$). Our monthly payment would thus be

$$monthlyPayment = \frac{\frac{.05}{12} \cdot 1000}{1 - (1 + \frac{.05}{12})^{-24}} = \$43.87$$

When the borrower makes the first month's payment, some of it goes to interest, some of it goes to paying down the balance. Specifically, one month's interest on \$1,000 is

$$\$1,000 \cdot \frac{0.05}{12} = \$4.17$$

and so $\$43.87 - \$4.17 = \$39.70$ goes to the balance, making the new balance \$960.30. The next month, this new balance is used to compute the new interest payment,

$$\$960.30 \cdot \frac{0.05}{12} = \$4.00$$

And so on until the balance is fully paid. This process is known as *loan amortization*.

Let's write a program that will calculate a loan amortization schedule given the inputs as described above. To start, we'll need to compute the monthly payment using the formula above and for that we'll need a monthly interest rate. The balance will be updated month-to-month, so we'll use another variable to represent that that gets updated. Finally, we'll want to track the current month in the loan schedule process.

Once we have these variables setup, we can start a loop that will repeat once for each month in the loan schedule. We could do this using either type of loop, but for this exercise, let's use a while loop. Using our *month* variable, we'll start by initializing it to 1 and run the loop through the last month, n .

On each iteration compute that month's interest and principle payments as above, update the balance, and also be sure to update our *month* counter variable to ensure we're making progress toward the termination condition. On each iteration we'll also output each of these variables to the user. The full program can be found in [Algorithm 4.16](#).

If we were to actually implement this we'd need to be more careful. This outlines the basic process, but keep in mind that US dollars are only accurate to cents. A monthly payment can't be \$43.871 cents. We'll need to take care to round properly. This introduces another issue: by rounding the final month's payment may not match the expected monthly payment (we may over or under pay in the final month). An actual implementation may need to handle the final month's payment separately with different logic and operations

than are inside the loop.

```

INPUT   : A principle,  $P$ , a number of terms,  $n$ , an APR,  $apr$ 
OUTPUT : A loan amortization schedule
1  $balance \leftarrow P$  //The initial balance is the principle
2  $i \leftarrow \frac{apr}{12}$  //monthly interest rate
3  $monthlyPayment \leftarrow \frac{iP}{1-(1+i)^{-n}}$ 
4  $month \leftarrow 1$  //A month counter
5 WHILE  $month \leq n$  DO
6    $monthInterest \leftarrow i \cdot balance$ 
7    $monthPrinciple \leftarrow monthlyPayment - monthInterest$ 
8    $balance \leftarrow balance - monthPrinciple$ 
9    $month = (month + 1)$ 
10  output  $month, monthInterest, monthPrinciple, balance$ 
11 END

```

Algorithm 4.16: Computing a loan amortization schedule

4.8. Exercises

Exercise 4.1. Write a for-loop and a while-loop that accomplishes each of the following.

- (a) Prints all integers 1 thru 100 on the same line delimited by a single space
- (b) Prints all even integers 0 up to n in reverse order
- (c) A list of integers divisible by 3 between a and b where a, b are parameters or inputs
- (d) Prints all positive powers of two up to 2^{30} : 1, 2, 4, ..., 1073741824 one value per line (try computing up to 2^{31} and 2^{32} and discern reasons for why it may fail)
- (e) Prints all even integers 2 thru 200 on 10 different lines (10 numbers on each line) *in reverse order*
- (f) Prints the following pattern of numbers (hint: use two nested loops; the result can be computed using some value of $i + 10j$)

4. Loops

11	21	31	41	51	61	71	81	91	101
12	22	32	42	52	62	72	82	92	102
13	23	33	43	53	63	73	83	93	103
14	24	34	44	54	64	74	84	94	104
15	25	35	45	55	65	75	85	95	105
16	26	36	46	56	66	76	86	96	106
17	27	37	47	57	67	77	87	97	107
18	28	38	48	58	68	78	88	98	108
19	29	39	49	59	69	79	89	99	109
20	30	40	50	60	70	80	90	100	110

Exercise 4.2. Civil engineers have come up with two different models on how a city's population will grow over the next several years. The first projection assumes a 10% annual growth rate while the second projection assumes a linear growth rate of 50,000 additional citizens per year. Write a program to project the population growth under both models. Take, as input, the initial population of the city along with a number of years to project the population.

In addition, compute how many years it would take to *double* the population under each model.

Exercise 4.3. Write a loan program similar to the amortization schedule program we developed in Section 4.7.3. However, give the user an option to specify an *extra* monthly payment amount in order to pay off the loan early. Calculate how much quicker the loan gets paid off and how much they save in interest.

Exercise 4.4. The rate of decay of a radioactive isotope is given in terms of its half-life H , the time lapse required for the isotope to decay to one-half of its original mass. For example, the isotope Strontium-90 (^{90}Sr) has a half-life of 28.9 years. If we start with 10kg of Strontium-90 then 28.9 years later you would expect to have only 5kg of Strontium-90 (and 5kg of Yttrium-90 and Zirconium-90, isotopes which Strontium-90 decays into).

Write a program that takes the following input:

- Atomic Number (integer)
- Element Name
- Element Symbol
- H (half-life of the element)
- m , an initial mass in grams

Your program will then produce a table detailing the amount of the element that remains after each year until less than 50% of the original amount remains. This amount can be computed using the following formula:

$$r = m \times \left(\frac{1}{2}\right)^{(y/H)}$$

y is the number of years elapsed, and H is the half-life of the isotope in years.

For example, using your program on Strontium-90 (symbol: Sr, atomic number: 38) with a half-life of 28.9 years and an initial amount of 10 grams would produce a table something

like:

Strontium-90 (38-Sr)	
Elapsed Years	Amount

-	10g
1	9.76g
2	9.53g
3	9.30g
...	
28	5.11g
29	4.99g

Exercise 4.5. In this exercise, you will develop a program that assists people in saving for a retirement using a tax-deferred 401k program.

Your application will allow a user to enter the following inputs:

- An initial starting balance
- A monthly contribution amount (we'll assume its the same over the life of the savings plan)
- An (average) annual rate of return
- An (average) annual rate of inflation

In addition, your program will allow a user to choose between two different scenarios:

- The first will allow the user to input a number of *years* left until retirement. It will then compute a monthly savings table which will be a projection out to that many years.
- The second will take a *target* dollar amount and compute a monthly savings table until the account balance has reached this target dollar amount.

The monthly interest rate should be inflation-adjusted. The inflation-adjusted rate of return can be computed with the following formula.

$$\frac{1 + \text{rate of return}}{1 + \text{inflation rate}} - 1$$

To get the monthly rate, simply divide by 12. Each month, interest is applied to the balance at this rate along with the monthly contribution amount.

An example: if we start with \$10,000 and contribute \$500 monthly with a return rate of 9% and an inflation rate of 1.2%, the first few lines of our table would something like the following.

4. Loops

Payment	Interest Earned	Contribution	Balance
1	\$ 64.23	\$ 500.00	\$ 10564.23
2	\$ 67.85	\$ 500.00	\$ 11132.08
3	\$ 71.50	\$ 500.00	\$ 11703.58
4	\$ 75.17	\$ 500.00	\$ 12278.75
...			

Exercise 4.6. Write a program that computes various statistics on a collection of numbers that can be read in from the command line, as command line arguments, or via other means. In particular, given n numbers,

$$x_1, x_2, \dots, x_n$$

your program should compute the following statistics:

- The minimum number
- The maximum number
- The mean,

$$\mu = \frac{1}{n} \sum_{i=1}^n x_i$$

- The variance,

$$\sigma^2 = \frac{1}{n} \sum_{i=1}^n (x_i - \mu)^2$$

- And the standard deviation,

$$\sigma = \sqrt{\frac{1}{n} \sum_{i=1}^n (x_i - \mu)^2}$$

where n is the number of numbers that was provided. For example, with the numbers,

$$3.14, 2.71, 42, 3, 13$$

your output should look something like:

Minimum:	2.71
Maximum:	42.00
Mean:	12.77
Variance:	228.77
Standard	
Deviation:	15.13

Exercise 4.7. The ancient Greek mathematician Euclid developed a method for finding the greatest common divisor of two positive integers, a and b . His method is as follows:

1. If the remainder of a/b is 0 then b is the greatest common divisor.
2. If it is not 0, then find the remainder r of a/b and assign b to a and the remainder r to b .
3. Return to step (1) and repeat the process.

Write a program that uses a function to perform this procedure. Display the two integers and the greatest common divisor.

Exercise 4.8. Write a program to estimate the value of $e \approx 2.718281 \dots$ using the series:

$$e = \sum_{k=0}^{\infty} \frac{1}{k!}$$

Obviously, you will need to restrict the summation to a finite number of n terms.

Exercise 4.9. The value of π can be expressed by the following infinite series:

$$\pi = 4 \cdot \left(1 - \frac{1}{3} + \frac{1}{5} - \frac{1}{7} + \frac{1}{9} - \frac{1}{11} + \frac{1}{13} - \dots \right)$$

An approximation can be made by taking the first n terms of the series. For $n = 4$, the approximation is

$$\pi \approx 4 \cdot \left(1 - \frac{1}{3} + \frac{1}{5} - \frac{1}{7} \right) = 2.8952$$

Write a program that takes n as input and outputs an approximation of π according to the series above.

Exercise 4.10. The sine function can be approximated using the following Taylor series.

$$\sin(x) = \sum_{i=0}^{\infty} \frac{(-1)^i}{(2i+1)!} x^{2i+1} = x - \frac{x^3}{3!} + \frac{x^5}{5!} - \dots$$

Write a function that takes x and n as inputs and approximates $\sin x$ by computing the first n terms in the series above.

Exercise 4.11. One way to compute π is to use Machin's formula:

$$\frac{\pi}{4} = 4 \arctan \frac{1}{5} - \arctan \frac{1}{239}$$

To compute the arctan function, you could use the following series:

$$\arctan x = \frac{x}{1} - \frac{x^3}{3} + \frac{x^5}{5} - \frac{x^7}{7} + \dots = \sum_{i=0}^{\infty} \frac{(-1)^i}{2k+1} x^{2i+1}$$

Write a program to estimate π using these formulas but allowing the user to specify how many terms to use in the series to compute it. Compare the estimate with the built-in definition of π in your language.

4. Loops

Exercise 4.12. The *arithmetic-geometric* mean of two numbers x, y , denoted $M(x, y)$ (or $\text{agm}(x, y)$) can be computed iteratively as follows. Initially, $a_1 = \frac{1}{2}(x + y)$ and $g_1 = \sqrt{xy}$ (i.e. the normal arithmetic and geometric means). Then, compute

$$\begin{aligned} a_{n+1} &= \frac{1}{2}(a_n + g_n) \\ g_{n+1} &= \sqrt{a_n g_n} \end{aligned}$$

The two sequences will converge to the same number which is the arithmetic-geometric mean of x, y . Obviously we cannot compute an infinite sequence, so we compute until $|a_n - g_n| < \epsilon$ for some small number ϵ .

Exercise 4.13. The integral of a function is a measure of the area under its curve. One numerical method for computing the integral of a function $f(x)$ on an interval $[a, b]$ is the *rectangle* rule. Specifically, an interval $[a, b]$ is split up into n equal subintervals of size $h = \frac{b-a}{n}$. Then the integral is approximated by computing:

$$\int_a^b f(x)dx \approx \sum_{i=0}^{n-1} f(a + ih) \cdot h$$

Write a program to approximate an integral using the rectangle method. For this particular exercise you will integrate the function

$$f(x) = \frac{\sin x}{x}$$

For reference, the function is depicted in Figure 4.3. Write a program that will read the end points a, b and the number of subintervals n and computes the integral of f using the rectangle method. It should then output the approximation.

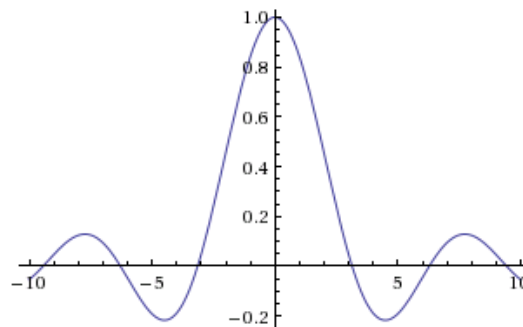


Figure 4.3.: Plot of $f(x) = \frac{\sin x}{x}$

Exercise 4.14. Another way to compute an integral is to a technique called *Monte Carlo Integration*, a randomized numerical integration method.

Given the interval $[a, b]$, we enclose the function in a region of interest with a rectangle of a known area A_r . We then randomly select n points within the rectangle and count

the number of random points that are within the function's curve. If m of the n points are within the curve, we can estimate the integral to be

$$\int_a^b f(x) dx \approx \frac{m}{n} A_r$$

Consider again the function $f(x) = \frac{\sin(x)}{x}$. Note that the global maximum and minimum of this function are 1 and ≈ -0.2172 respectively. Therefore, we can also restrict the rectangle along the y -axis from -0.25 to 1. That is, the lower left of the rectangle will be $(a, -0.25)$ and the upper right will be $(b, 1)$ for a known area of

$$A_r = |a - b| \times 1.25$$

Figure 4.4 illustrates the rectangle for the interval $[-5, 5]$.

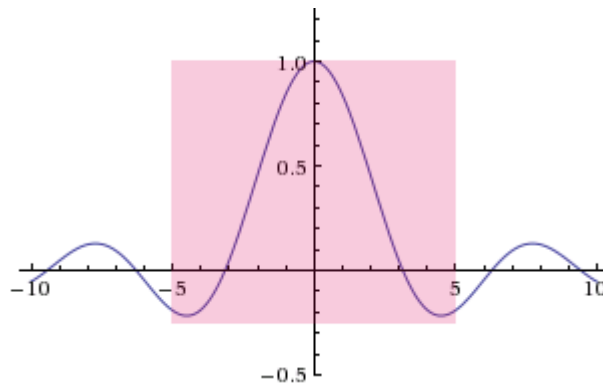


Figure 4.4.: A rectangle for the interval $[-5, 5]$.

Write a program that will takes as input interval values a, b , and an integer n and perform a Monte Carlo estimate of the integral of the function above. Realize that this is just an approximation and it is randomized so your answers may not match exactly and may be different on various executions of your program. Take care that you handle points within the curve but under the x -axis correctly.

Exercise 4.15. Consider a ball trapped in a 2-D box. Suppose that it has an initial position (x, y) within the box (the box's dimensions are specified by its lower left (x_ℓ, y_ℓ) and an upper right (x_r, y_r) points) along with an initial angle of travel θ in the range $[0, 2\pi)$. As the ball travels in this direction it will eventually collide with one of the sides of the box and bounce off. For this model, we will assume no loss of velocity (it keeps going) and its angle of reflection is perfect.

Write a program that takes as input, $x, y, \theta, x_\ell, y_\ell, x_r, y_r$, and an integer n and computes the first $n - 1$ Euclidean points on the box's perimeter that the ball bounces off of in its travel (include the initial point in your printout for a total of n points). You may assume that the input will always be "good" (the ball will always begin somewhere inside the box and the lower left and upper right points will not be reversed).

4. Loops

As an example, consider the inputs:

$$x = 1, y = 1, \theta = .392699, x_\ell = 0, y_\ell = 0, x_r = 4, y_r = 3, n = 20$$

Starting at $(1, 1)$, the ball travels up and to the right bouncing off the right wall. Figure 4.5 illustrates this and the subsequent bounces back and forth.

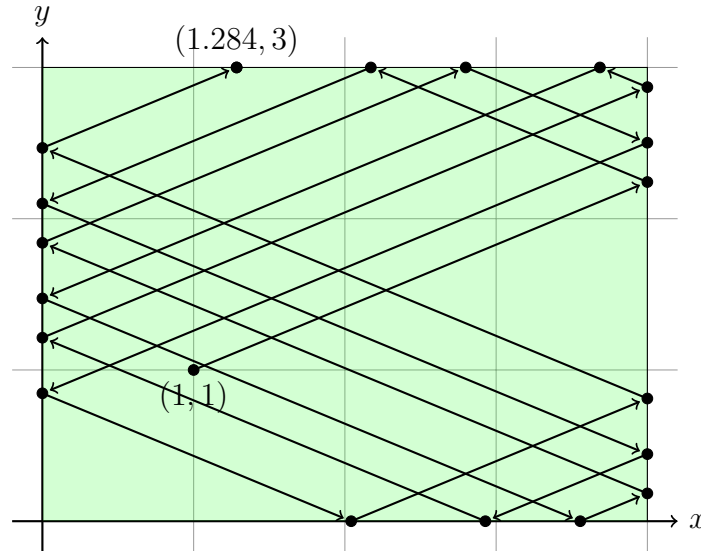


Figure 4.5.: Follow the bouncing ball

Your output should simply be the points and should look something like the following.

```
(1.000000, 1.000000)
(4.000000, 2.242640)
(2.171572, 3.000000)
(0.000000, 2.100506)
(4.000000, 0.443652)
(2.928929, 0.000000)
(0.000000, 1.213202)
(4.000000, 2.870056)
(3.686287, 3.000000)
(0.000000, 1.473090)
(3.556355, 0.000000)
(4.000000, 0.183764)
(0.000000, 1.840617)
(2.798998, 3.000000)
(4.000000, 2.502529)
(0.000000, 0.845675)
(2.041640, 0.000000)
(4.000000, 0.811179)
(0.000000, 2.468033)
(1.284282, 3.000000)
```

Exercise 4.16. An integer $n \geq 2$ is *prime* if its only divisors are 1 and itself, n . For example, 2, 3, 5, 7, 11, ... are primes. Write a program that outputs all prime numbers 2 up to m where m is read as input.

Exercise 4.17. An integer $n \geq 2$ is *prime* if the only integers that evenly divide it are 1 and n itself, otherwise it is *composite*. The *prime factorization* of an integer is a list of its prime divisors along with their multiplicities. For example, the prime decomposition of 188,760 is:

$$188,760 = 2 \cdot 2 \cdot 2 \cdot 3 \cdot 5 \cdot 11 \cdot 11 \cdot 13$$

Write a program that takes an integer n as input and outputs the prime factorization of n . If n is invalid, an appropriate error message should be displayed instead. Your output should look something like the following.

$$1001 = 7 * 11 * 13$$

Exercise 4.18. One way of estimating π is to randomly sample points within a 2×2 square centered at the origin. If the distance between the randomly chosen point (x, y) and the origin is less than or equal to 1, then the point lies inside the unit circle centered at the origin and we count it. If the point lies outside the circle then we can ignore it. If

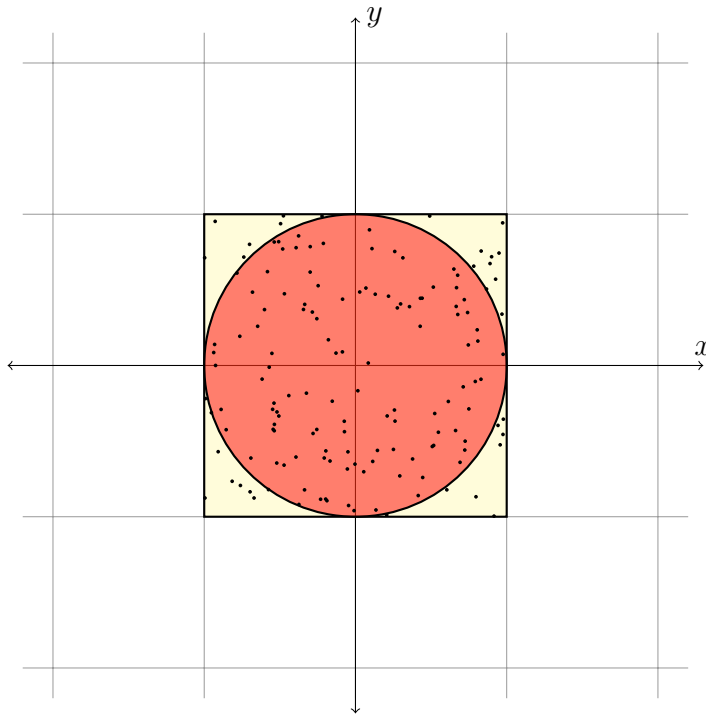


Figure 4.6.: Sampling points in a circle

we sample n points and m of them lie within the circle, then π can be estimated as

$$\pi \approx \frac{4m}{n}$$

4. Loops

Given a point (x, y) , its distance from the origin is simply

$$\sqrt{x^2 + y^2}$$

This idea is illustrated in Figure 4.6. Example code is given to randomly generate numbers within a bound. Write a program that takes an integer n as input and randomly samples n points within the 2×2 square and outputs an approximation of π .

Of course, you'll need a way to generate random numbers within the range $[-1, 1]$. Since you are using some randomization, the result is just an *approximation* and may not match exactly or even be the same between two different runs of your program.

Exercise 4.19. A regular polygon is a polygon that is equiangular. That is, it has n sides and n points whose angle from the center are all equal in measure. Examples for $n = 3$ through $n = 8$ can be found in Figure 4.7.




Figure 4.7.: Regular polygons

Write a program that takes n and a radius r as inputs and computes the points of a regular n -sided polygon centered at the origin $(0, 0)$. Each point should be distance r from the origin and the first point should lie on the positive x -axis. Each subsequent point should be at an angle θ equal to $\frac{2\pi}{n}$ from the previous point. Recall that given the polar coordinates θ, r we can convert to cartesian coordinates (x, y) using the following.

$$\begin{aligned}x &= r \cdot \cos \theta \\y &= r \cdot \sin \theta\end{aligned}$$

Your program should be robust enough to check for invalid inputs. If invalid, an error message should be printed and the program should exit.

For example, running your program with $n = 5, r = 6$ should produce the points of a pentagon with “radius” 6. The output should look something like:

```
Regular 5-sided polygon with radius 6.0:
(6.0000, 0.0000)
(1.8541, 5.7063)
(-4.8541, 3.5267)
(-4.8541, -3.5267)
(1.8541, -5.7063)
```

Exercise 4.20. Let $p_1 = (x_1, y_1)$ and $p_2 = (x_2, y_2)$ be two points in the cartesian plane which define a *line* segment. Suppose we travel along this line starting at p_1 taking n

steps that are an equal distance apart until we reach p_2 . We wish to know which points correspond to each of these steps and which step along this path is *closest* to another point $p_3 = (x_3, y_3)$. Recall that the distance between two points can be computed using the Euclidean distance formula:

$$\delta = \sqrt{(x_1 - x_2)^2 + (y_1 - y_2)^2}$$

Write a program that takes three points and an integer n as inputs and outputs a sequence of points along the line defined by p_1, p_2 that are distance $\frac{\delta}{n}$ apart from each other. It should also indicate which of these computed points is the closest to the third point. For example, the execution of your program with inputs 0, 2, -5.5, 7.75, -2, 3, 10 should produce output that looks something like:

```
(0.00, 2.00) to (-5.50, 7.75) distance: 7.9569
(0.00, 2.00)
(-0.55, 2.58)
(-1.10, 3.15)
(-1.65, 3.72)  <-- Closest point to (-2, 3)
(-2.20, 4.30)
(-2.75, 4.88)
(-3.30, 5.45)
(-3.85, 6.02)
(-4.40, 6.60)
(-4.95, 7.17)
(-5.50, 7.75)
```

Exercise 4.21. The natural log of a number x is usually computed using some numerical approximation method. One such method is to use the following Taylor series.

$$\ln x = (x - 1) - \frac{(x - 1)^2}{2} + \frac{(x - 1)^3}{3} - \frac{(x - 1)^4}{4} + \dots$$

However, this only works for $|x - 1| \leq 1$ (except for $x = 0$) and diverges otherwise. For x such that $|x| > 1$, we can use the series

$$\ln \frac{y}{y - 1} = \frac{1}{y} + \frac{1}{2y^2} + \frac{1}{3y^3} + \dots$$

where $y = \frac{x}{x-1}$. Of course such an infinite computation cannot be performed by a computer. Instead, we approximate $\ln x$ by computing the series out to a finite number of terms, n . Your program should print an error message and exit for $x \leq 0$; otherwise it should use the first series for $0 < x \leq 1$ and the second for $x > 1$.

Another series that has better convergence properties and works for any range of x is as follows

$$\ln x = \ln \frac{1+y}{1-y} = 2y \left(1 + \frac{1}{3}y^2 + \frac{1}{5}y^4 + \frac{1}{7}y^6 \dots \right)$$

4. Loops

where $y = \frac{(x-1)}{(x+1)}$.

You will write a program that approximates $\ln x$ using these two methods computed to n terms. You will also compute the error of each method by comparing the approximated value to the standard math library's `log` function.

Your program should accept x and n as inputs. It should be robust enough to reject any invalid inputs ($\ln x$ is not defined for $x = 0$ you may also print an error for any negative value; n must be at least one). It will then compute an approximation using both methods and print the relative error of each method.

For example, the execution of your program with inputs 3.1415, 6 should produce output that looks something like:

```
Taylor Series: ln(3.1415) ~= 1.11976
Error: 0.02494
Other Series: ln(3.1415) ~= 1.14466
Error: 0.00004
```

Exercise 4.22. There are many different numerical methods to compute the square root of a number. In this exercise, you will implement several of these methods.

- (a) The Exponential Identity Method involves the following identity:

$$\sqrt{x} = e^{\frac{1}{2} \ln(x)}$$

Which assumes the use of built-in (or math-library) functions for e and the natural log, \ln .

- (b) The Babylonian Method involves iteratively computing the following recurrence:

$$a_i = \frac{1}{2} \left(a_{i-1} + \frac{x}{a_{i-1}} \right)$$

where $a_1 = 1.0$. Computation is repeated until $|a_i - a_{i-1}| \leq \delta$ where δ is some small constant value.

- (c) A method developed for one of the first electronic computers (EDSAC [21]) involves the following iteration. Let $a_0 = x$, $c_0 = x - 1$. Then compute

$$\begin{aligned} a_{i+1} &= a_i - \frac{a_i c_i}{2} \\ c_{i+1} &= \frac{c_i^2 (c_i - 3)}{4} \end{aligned}$$

The iteration is performed for as many iterations as specified (n), or until the change in a is negligible. The resulting value for a is used as an approximation for $\sqrt{x} \approx a$. However, this method only works for values of x such that $0 < x < 3$. We can easily overcome this by *scaling* x by some power of 4 so that the scaled value of x satisfies $\frac{1}{2} \leq x < 2$. After applying the method we can then scale back up by the appropriate value of 2 (since $\sqrt{4} = 2$). Algorithm 4.17 describes how to scale x .

Write a program to compute the square root of an input number using these methods and compare your results.

```

1 power ← 0
2 WHILE  $x < \frac{1}{2}$  DO
  | //Scale up
3    $x \leftarrow (x \cdot 4)$ 
4    $power \leftarrow (power - 1)$ 
5 END
6 WHILE  $x \geq 2$  DO
  | //Scale down
7    $x \leftarrow \frac{x}{4}$ 
8    $power \leftarrow (power + 1)$ 
9 END

```

Algorithm 4.17: Scaling a value x so that it satisfies $\frac{1}{2} \leq x < 2$. After execution, $power$ indicates what power of 2 the value x was scaled by.

Exercise 4.23. There are many different numerical methods to compute the natural logarithm of a number, $\ln x$. In this exercise, you will implement several of these methods.

(a) A formula version approximates the natural logarithm as:

$$\ln(x) \approx \frac{\pi}{2M(1, 4/s)} - m \ln(2)$$

Where $M(a, b)$ is the *arithmetic-geometric* mean and $s = x2^m$. In this formula, m is a parameter (a larger m provides more precision).

(b) The standard Taylor Series for the natural logarithm is:

$$\ln(x) = \sum_{n=1}^{\infty} \frac{(-1)^{n+1}}{n} (x-1)^n$$

As we cannot compute an infinite series, we will simply compute the series to the first m terms. Also note that this series is not convergent for values $x > 1$

(c) Borchardt's algorithm is an iterative method that works as follows. Let

$$a_0 = \frac{1+x}{2} \quad b_0 = \sqrt{x}$$

Then repeat:

$$\begin{aligned} a_{k+1} &= \frac{a_k + b_k}{2} \\ b_{k+1} &= \sqrt{a_{k+1} b_k} \end{aligned}$$

4. Loops

until the absolute difference between a_k, b_k is small; that is $|a_k - b_k| < \epsilon$. Then the logarithm is approximated as

$$\ln(x) \approx 2 \frac{x - 1}{a_k + b_k}$$

- (d) Newton's method works if x is sufficiently close to 1. It works by setting $y_0 = 1$ and then computing

$$y_{n+1} = y_n + 2 \frac{x - e^{y_n}}{x + e^{y_n}}$$

The iteration is performed m times.

To ensure that some of the methods above work, you may need to *scale* the number x to be as close as possible to 1. One way to do this is to divide or multiply by e until x is close to 1. Suppose we divided by e k times; that is $x = z \cdot e^k$ where z is close to 1. Then

$$\ln(x) = \ln(z \cdot e^k) = \ln(z) + \ln(e^k) = \ln(z) + k$$

Thus, we can apply the methods above to Newton's method to z and add k to the result to get $\ln(x)$. A similar trick can be used to ensure that the Taylor Series method is convergent.

Exercise 4.24. Consider the following variation on the classical “FizzBuzz” challenge. Write a program that will print out numbers 1 through n where n is provided as a command line argument. However, if the number is a perfect square (that is, the square of some integer; for example $1 = 1^2, 4 = 2^2, 9 = 3^2$, etc.) print “Go Huskers” instead. If the number is a prime (2, 3, 5, 7, etc.) print “Go Cubs” instead.

Exercise 4.25. Write a program that takes an integer n and a subsequent list of integers as command line arguments and determines which number(s) between 1 and n are missing from the list. For example, if the following numbers are given to the program:

10 5 2 3 9 2 8 8 your output should look something like:

```
Missing numbers 1 thru 10:  
1, 4, 6, 7, 10
```

Exercise 4.26. Write a program that takes a list of pairs of numbers representing latitudes/longitudes (on the scale $[-180, 180]$ (negative values correspond to the southern and western hemispheres). Then, starting with the first pair, calculate the intermediate air distances between each location as well as a final total distance.

To compute air distance from location A to a location B , use the Spherical Law of Cosines:

$$d = \arccos(\sin(\varphi_1) \sin(\varphi_2) + \cos(\varphi_1) \cos(\varphi_2) \cos(\Delta)) \cdot R$$

where

- φ_1 is the latitude of location A , φ_2 is the latitude of location B

- Δ is the difference between location B 's longitude and location A 's longitude
- R is the (average) radius of the earth, 6,371 kilometers

Note: the formula above assumes that latitude and longitude are measured in radians r , $-\pi \leq r \leq \pi$. To convert from degrees deg ($-180 \leq deg \leq 180$) to radians r , you can use the simple formula:

$$r = \frac{deg}{180} \pi$$

For example, if the command line arguments were

```
40.8206 -96.756 41.8806 -87.6742 41.9483 -87.6556 28.0222 -81.7329
```

your output should look something like:

```
(40.8206, -96.7560) to (41.8806, -87.6742): 766.8053km
(41.8806, -87.6742) to (41.9483, -87.6556): 7.6836km
(41.9483, -87.6556) to (28.0222, -81.7329): 1638.7151km
Total Distance: 2413.2040
```

Exercise 4.27. A DNA sequence is made up of a sequence of four nucleotide bases, A, C, G, T (adenine, cytosine, guanine, thymine). One particularly interesting statistic of a DNA sequence is finding a *CG island*: a subsequence that contains the highest frequency of guanine and cytosine.

For simplicity, we will be interested in subsequences of a particular length, n that will be provided as part of the input.

Write a program that takes, as command line arguments, an integer n and a DNA sequence. The program should then find all subsequences of the given DNA string of length n with the maximal frequency of C and G in it. For example, if the DNA sequence is

```
ACAAGATGCCATTGTCCCCGGCCTCCTGCTGCTGCTCTCCGGGGCCACGGC
```

and the “window” size that we’re interested in is $n = 5$ then you would scan the sequence and find every subsequence with the maximum number of C or G bases. Your output should include *all* CG Islands (by indices) in the sequence similar to the following.

4. Loops

```
n = 5
highest frequency: 5 / 5 = 100.00%
CG Islands:
15 thru 20: CCCCC
16 thru 21: CCCCC
17 thru 22: CCCGG
18 thru 23: CCGGC
19 thru 24: CGGCC
42 thru 47: CCGGG
43 thru 48: CGGGG
44 thru 49: GGGGC
45 thru 50: GGGCC
```

Exercise 4.28. Write a program that will assist people in saving for retirement using a tax-deferred 401k program.

Your program will read the following inputs as command line arguments.

- An initial starting balance
- A monthly contribution amount (we'll assume its the same over the life of the savings plan)
- An (average) annual rate of return (on the scale $[0, 1]$)
- An (average) annual rate of inflation (on the scale $[0, 1]$)
- A number of years until retirement

Your program will then compute a monthly savings table detailing the (inflation-adjusted) interest earned each month, contribution, and new balance. The inflation-adjusted rate of return can be computed with the following formula.

$$\frac{1 + \text{rate of return}}{1 + \text{inflation rate}} - 1$$

To get the monthly rate, simply divide by 12. Each month, interest is applied to the balance at this rate (prior to the monthly deposit) and the monthly contribution is added. Thus, the earnings compound month to month.

Be sure that your program handles bad inputs as well as it can. It should also round to the nearest cent for every figure. Finally, as of 2014, annual 401k contributions cannot exceed \$17,500. If the user's proposed savings schedule violates this limit, display an error message instead of the savings table.

For inputs `10000 500 0.09 0.012 10` your output should look something like the following:

Month	Interest	Balance
1 \$	64.23 \$	10564.23
2 \$	67.85 \$	11132.08
3 \$	71.50 \$	11703.58
4 \$	75.17 \$	12278.75
5 \$	78.87 \$	12857.62
6 \$	82.58 \$	13440.20
7 \$	86.33 \$	14026.53
8 \$	90.09 \$	14616.62
9 \$	93.88 \$	15210.50
...		
116 \$	678.19 \$	106767.24
117 \$	685.76 \$	107953.00
118 \$	693.37 \$	109146.37
119 \$	701.04 \$	110347.41
120 \$	708.75 \$	111556.16
Total Interest Earned: \$		41556.16
Total Nest Egg: \$		111556.16

Exercise 4.29. An *affine cipher* is an encryption scheme that encrypts messages using the following function:

$$e_k(x) = (ax + b) \bmod n$$

Where n is some integer and $0 \leq a, b, x \leq n - 1$. That is, we fix n , which will be used to encode an alphabet as in Table 4.1.

x	character
0	(space)
1	A
2	B
3	C
\vdots	\vdots
25	Y
26	Z
27	.
28	!

Table 4.1.: Character Mapping for $n = 29$

Then we choose integers a, b to define the encryption function. Suppose $a = 10, b = 13$, then

$$e_k(x) = (10x + 13) \bmod 29$$

So to encrypt “HELLO!” we would encode it as 8, 5, 12, 12, 15, 27, then encrypt them,

$$e_k(8) = (10 \cdot 8 + 13) \bmod 29 = 6$$

4. Loops

$$\begin{aligned}e_k(5) &= (10 \cdot 5 + 13) \bmod 29 = 5 \\e_k(12) &= (10 \cdot 12 + 13) \bmod 29 = 17 \\e_k(12) &= (10 \cdot 12 + 13) \bmod 29 = 17 \\e_k(15) &= (10 \cdot 15 + 13) \bmod 29 = 18 \\e_k(28) &= (10 \cdot 28 + 13) \bmod 29 = 3\end{aligned}$$

Which, when mapped back to characters using our encoding is “FEQQRC.”

To decrypt a message we need to invert the encryption function, that is,

$$d_k(y) = (a^{-1} \cdot (y - b)) \bmod n$$

where a^{-1} is the inverse of a modulo n . The inverse of an integer a is the value such that

$$(a \cdot a^{-1}) \bmod n = 1$$

so for $a = 10, n = 29$, the inverse, $10^{-1} \bmod 29 = 3$ since $3 \cdot 10 \bmod 29 = 1$. Given a and n , how can we find an inverse, a^{-1} ? Obviously it cannot be zero, nor can it be 1 (1 is its own inverse). There is a simple algorithm (the Extended Euclidean Algorithm) that can solve this problem, but $n = 29$ is small enough that a brute-force strategy of testing all possibilities will suffice.

Write a program that takes a, b and an encrypted message as command line arguments and decrypts the message. Your program should print the decrypted message and other cipher information to the standard output. For example:

```
a      = 10
b      = 13
a^-1 = 3
Encrypted Message: FEQQRC
Decrypted Message: HELLO!
```

5. Functions

In mathematics, a function is a mapping from a set of *inputs* to a set of *outputs* such that each input is mapped to exactly one output. For example, the function

$$f(x) = x^2$$

maps numeric values to their squares. The input is a variable x . When we assign an actual value to x and evaluate the function, then the function has a value, its output. For example, setting $x = 2$ as input, the output would be $2^2 = 4$. Mathematical functions can have multiple inputs,

$$f(x, y) = x^2 + y^2 \quad f(\beta, y, z) = 2x + 3y - 4z$$

But will still only ever have *one* output value.

In programming languages, a **function** (sometimes called subroutine or procedure) can take multiple inputs and produce one output value. We’ve already seen some examples of these functions. For example, most languages provide a math library that you can use to evaluate the square root or sine of a value x . We’ve also seen some functions with multiple input values such as the “power” function that allows you to compute $f(x, y) = x^y$. The main entry point to many programs is defined by a main function.

More formally, a function is a sequence of instructions (code) that is packaged into a *unit* that can be reused. A function performs a specific task: given a number of inputs, it performs some sequence of operations (executes some code) and “returns” (outputs) a result. The output can be captured into a variable or other expression by whatever code *invoked* or “called” the function.

Defining and using functions in programming has numerous advantages. The most obvious advantage is that it allows you a way to *organize* code. By separating a program it into distinct units code it is more organized and it is clearer what each piece or segment of code does. This also facilitates **top-down design**: one way to approach a problem is to split it up into a series of subproblems until each subproblem is either trivial to deal with, or an existing, “off-the-shelf” solution already exists for it. Functions may be the logical unit for each subproblem.

Another advantage is that by organizing code into functions, those functions can be *reused* in multiple places either in your program/project or even in other programs/projects. A prime example of this are the standard libraries available in most programming languages that provide functions to perform standard input/output or mathematical

5. Functions

functions. These standard libraries provide functions that are used by thousands of different programs across multiple different platforms.

Functions also form an *isolated* unit of code. This allows for better and easier *testing*. By isolating pieces of code, we can rigorously test those pieces of code by themselves without worrying about the larger program or contexts.

Finally, functions facilitates [procedural abstraction](#). Placing code into functions allows you to abstract the details of how the function computes its answer. As an example: consider a standard math library’s square root function: it may use some interpolation method, a Taylor series, or some other method entirely to compute the square root of a given number. However, by putting this functionality into a function, we, as programmers, do not need to concern ourselves about these details. Instead, we simply *use* the function, allowing us to focus on the larger issues at hand in our program.

5.1. Defining & Using Functions

Like variables, many programming languages may require that you, in some way, declare the function before you can use it. A function declaration may simply include a description of the function’s input/output and name. A function declaration may require require you to define the function’s body at the same time or separately. Functions can also have scope: some areas of the code may be able to “see” the function or know about it and be able to invoke the function while other areas of the code may *not* be able to see the function and therefore may not be able to invoke it.

Some interpreted programming languages use function [hoisting](#) which allows you to use/invoke functions *before* you declare them. This works because the interpreter does an initial scan of the code and identifies all function declarations. Only after it has “hoisted” all functions into scope does it start to execute the program. Thus, a function declaration can appear *after* it has been used and it will still work.

5.1.1. Function Signatures

A function is usually defined by its [scope](#): every function can be identified by its name (also called an *identifier*), its list of *input parameters*, and its *output*. A function signature allows the programming language to uniquely identify each function so that when you

invoke a function there is no ambiguity in which function should be called.

```

1 FUNCTION sum(a, b)
2   |  $x \leftarrow a + b$ 
3   | return x
4 END

```

Algorithm 5.1: A function in pseudocode. In this case, the name (identifier) of the function is *sum* and it has two parameters, *a* and *b*. Its body is contained in lines 2–3. Its return value is indicated by the return statement on line 3.

A function declaration in pseudocode is presented in Algorithm 5.1. In the pseudocode, explicit variable types are omitted, and thus the return type is inferred from the return statement. In Figure 5.1 we have provided an example of a function declaration in the C programming language with each element labeled.

The figure shows a C function declaration: `double getDistance(double x1, double y1, double x2, double y2);`. Brackets and labels identify the components: 'double' is the 'Return Type', 'getDistance' is the 'Identifier (name)', and '(double x1, double y1, double x2, double y2)' is the 'Parameters' list.

Figure 5.1.: A function declaration (prototype) in the C programming language with the return type, identifier, and parameter list labeled.

Some languages only allow you to use one identifier for one function (like variables) while other languages allow you to define multiple functions with the same identifier as long as the parameter list is different (see Section 5.3.2 below). In general, like variables, function names are case sensitive. Also similar to variables, modern lower camel casing is used with function names.

When defining the parameters to a function (its input), you usually provide a comma delimited list of variable names. In the case of statically typed languages, the types of the variable parameters are also specified. This order is important as when you invoke the function, the number of inputs must match the number of parameters in the function declaration. The variable types may also need to match. In some dynamically typed languages, you may be able to call functions with different types or you may be able to omit some of the parameters (see Section 5.3.4 below).

Similarly, the return type of the function may need to be specified in statically typed languages while with dynamic languages, functions may conditionally return different types. We generally refer to the “return value” or “return type” because when a function

5. Functions

is done executing, it “returns” the control flow back to the line of code that invoked it, returning its computed value.

You can also define functions that may not have any inputs or may not have any output. Some languages use the keyword `void` to indicate no return value and such functions are known as “void functions.” When a function doesn’t have any input values, its parameter list is usually empty.

The function signature may then be accompanied by the function *body* which contains the actual code that specifies what the function does. Typically the function body is demarcated with opening and closing curly brackets, `{ ... }`. Within the function you can generally write any valid code including declaring variables. When you declare a variable inside a function, however, it is *local* to that function. That is, the variable’s scope is only defined within the function. A local variable cannot be accessed outside the function, indeed the local variable does not usually survive when the function ends its execution and returns control back to line of code that called it. Function parameters are essentially locally scoped variables as well and can usually be treated as such.

5.1.2. Calling Functions

When a function has been defined and is in scope, you can *invoke* or “call” the function by coding the function name and providing the input parameters which can typically be either variables or literals. When provided as inputs, parameters are referred to as *arguments* to the function. The arguments are typically provided as a comma delimited list and placed inside parentheses.

Invoking a function changes the usual flow of control. When invoked, control is handed over to the function. When the function finishes executing the code in its body, control flow returns to the point in the code that invoked it. It is common for a program to be written so that a function calls another function and that function calls another. This can form a deep chain of function calls in which the flow of control is transferred multiple times. Upon the completion of each function, control is returned back to the function that called it, referred to as the *calling function*.

If a function returns a value it can either be captured in a variable using an assignment operator or by using it in an expression.

```
1 a ← 10
2 b ← 20
3 c ← sum(a, b)
```

Algorithm 5.2: Using a function. We invoke a function by indicating its name (identifier) and passing it arguments.

5.1.3. Organizing

Functions provide code organization, but functions themselves should also be organized. We've seen this with standard libraries. Functions that provide basic input/output are all grouped together into one library. Functions that involve math functions are grouped together into a math library.

Some languages allow you to define and “import” individual libraries which organize similar functions together. Some languages do this by collecting functions into “utility” classes or *modules*. Only when you import these modules do the functions come into scope and can be used in your code. If you do not import these modules, then the functions are out of scope and cannot be used.

In some languages, functions, once imported, are part of the *global scope* and can be “seen” by any part of the code. This can cause *conflicts*: if you import modules from two different libraries each with different functions that have the same name or signature, then the two function definitions may be in conflict or it may make your code ambiguous as to which function you intend to invoke. This is sometimes referred to as “polluting the namespace.” There are several techniques that can avoid this situation. Some languages allow you to place functions into a *namespace* to keep functions with the same name in different “spaces.” Other languages allow you to place functions into different classes and then invoke them by explicitly specifying *which* class's function you want to call. Yet other languages don't have great support for function organization and it is the library designer's responsibility to avoid naming conflicts, typically by adding a library-specific prefix to every function.

5.2. How Functions Work

To understand how functions work in practice, it is necessary to understand how a program operates at a lower level. In particular, each program has a [program stack](#) (also called a call stack). A [stack](#) is a data structure that holds elements in a [Last-In First-Out \(LIFO\)](#) manner. Elements are added to the “top” of the stack in an operation called *push* and elements can be removed from the top of the stack in an operation called *pop*. In general, elements cannot be inserted or removed from the middle or “bottom” of the stack.

In the context of a program, a call stack is used to keep track of the flow of control. Depending on the operating system, compiler and architecture, the details of how elements are stored in the program stack may vary. However, in general when a program begins, the operating system loads it into memory at the bottom of the call stack. Global variables (static data) are stored on top of the main program. Each time a function is called, a new *stack frame* is placed on top of the stack. This frame contains enough space to hold values for the arguments passed to the function, local variables declared and used by the function, as well as a space for a return value and a return *address*. The return

5. Functions

address is a memory location that the program should return to after the execution of the function. That way, when the function finishes its execution, the stack frame can be removed (popped) and the lower stack frame of the calling function is preserved. This is a very efficient way to keep track of the flow of control in a program. As function calls another function, each stack frame is preserved by pushing a new one on top of the program stack.

Each time a function terminates execution and returns, the removal of the stack frame means that all local variables go *out of scope*. Thus, variables that are local to a function are not accessible outside the function.

To illustrate, consider the following snippet of C code. The `main()` function invokes the `average()` function which in turn invokes the `sum()` function. Each invocation creates a new stack frame on top of the last in the program stack which is depicted in Figure 5.2.

```
1  double sum(double a, double b) {
2      double x = a + b;
3      return x;
4  }
5
6  double average(double a, double b) {
7      double y = sum(a, b) / 2.0;
8      return y;
9  }
10
11 int main(int argc, char **argv) {
12     double n = 10.0;
13     double m = 16.0;
14     double ave = average(n, m);
15     printf("average = %f\n", ave);
16     return 0;
17 }
```

5.2.1. Call By Value

When a function is invoked, arguments are passed to it. When you invoke a function you can pass it variables as arguments. However, variables themselves are not passed to the function, but instead the values *stored* in the variables at the time that you call the function are passed to the function. This mechanism is known as [call by value](#) and the variable values are *passed by value* to the function.

Recall that the arguments passed to a function are placed in a new stack frame for that function. Thus, in reality *copies* of the values of the variables are passed to the function. Any changes to the parameters inside the function have *no effect* on the original variables

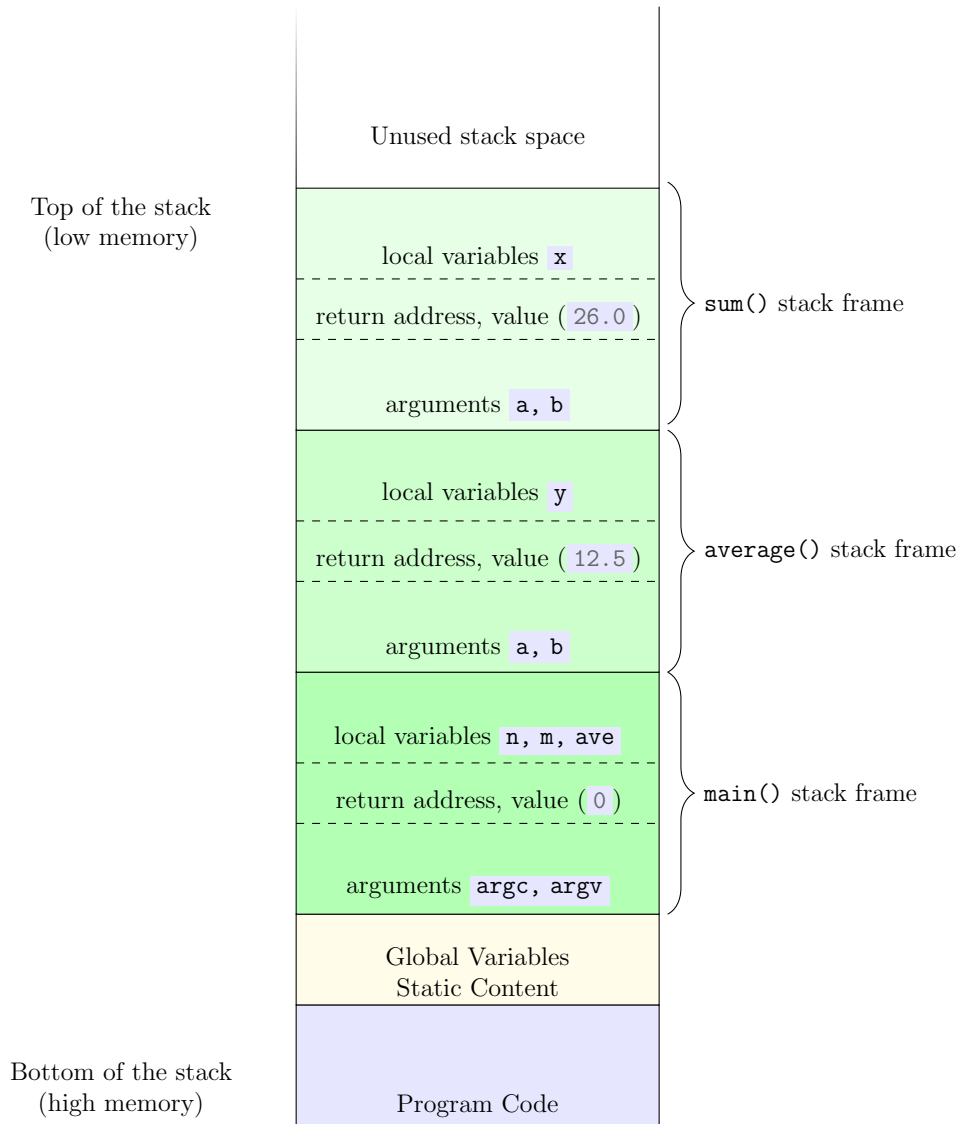


Figure 5.2.: Program Stack. At the bottom we have the program’s code, followed by static content such as global variables. Each function call has its own stack frame along with its own arguments and local variables. In particular, the variable arguments `a` and `b` in two different stack frames are completely different variables. Upon returning from the `sum()` function call, the top-most stack frame would be popped and removed, returning to the code for the `average()` function via the return address. The stack is depicted bottom-up with high memory at the bottom and low memory at the top, but this may differ depending on the architecture.

that were “passed” to the function when it was invoked.

To illustrate, consider the following C code. We have a function `sum` that takes two integer parameters `a` and `b` which are passed by value. Inside `sum`, we create another

5. Functions

variable `x` which is the sum of the two passed variables. We then *change* the value of the first variable, `a` to `10`. Elsewhere in the code we call `sum` on two variables, `n`, `m` with values 5 and 15 respectively. The invocation of the function `sum` means that the two values, 5 and 15, stored in the variables are copied into a new stack frame. Thus, changing the value to the first parameter *changes the copy* and has no effect on the variable `n`. At the end of this code snippet `n` retains its original value of 5. The program stack frames are depicted in Figure 5.3.

```
1  int sum(int a, int b) {  
2      int x = a + b;  
3      a = 10;  
4      return x;  
5  }  
6  
7  ...  
8  
9  int n = 5;  
10 int m = 15;  
11 int k = sum(n, m);
```

5.2.2. Call By Reference

Some languages allow you to pass a parameter to a function by providing its memory address. Since the memory address is being provided to the function, the function is able to access the original variable and manipulate the contents stored at that memory address. In particular, the function is now able to make changes to the original variable. This mechanism is known as *call by reference* and the variables are *passed by reference*.

To illustrate consider the following C code. Here, the variable `a` is passed by reference (`b` is still passed by value, the `*a` and `&n` in the following code are dereferencing and referencing operators respectively. For details, see Section 18.2). Below when we invoke the `sum` function, we pass not the value stored in `n`, but the memory address of the variable `n`. Thus, when we change the value of the variable `a` in the function, we are actually changing the value of `n` (since we have access to its memory location. At the conclusion of this snippet of code, the value stored in `n` has been changed to 10. The program stack frames are depicted in Figure 5.4.

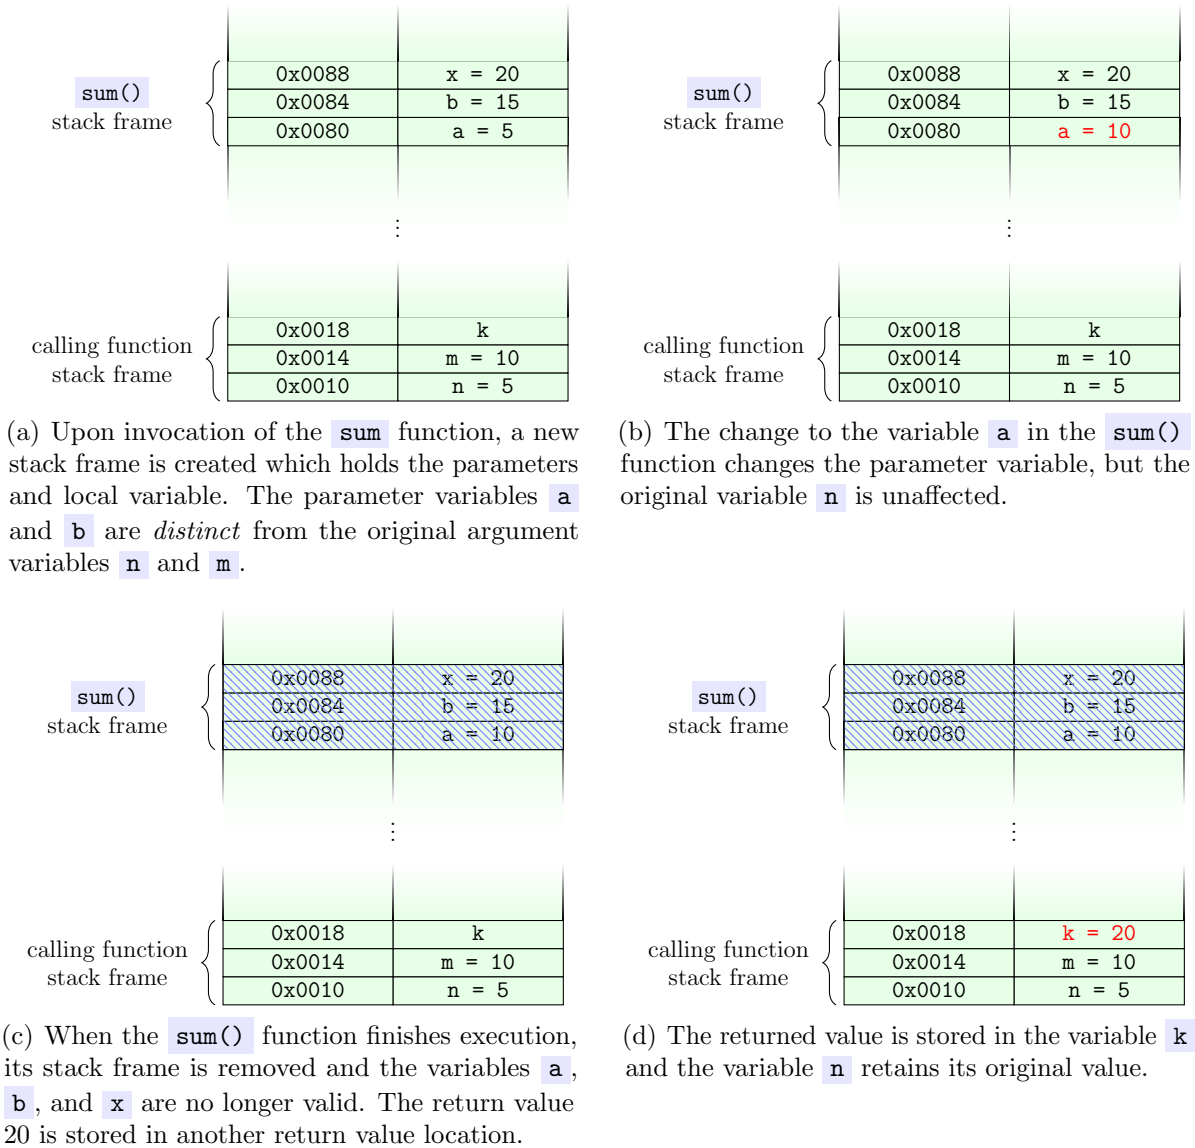


Figure 5.3.: Demonstration of Pass By Value. Passing variables by value means that *copies* of the values stored in the variables are provided to the function. Changes to parameter variables do not affect the original variables.

5. Functions

```
1  int sym(int *a, int b) {  
2      int x = *a + b;  
3      *a = 10;  
4      return x;  
5  }  
6  
7  ...  
8  
9  int n = 5;  
10 int m = 15;  
11 int k = sum(&n, m);
```

Whether or not a variable is passed by value or by reference depends on the language, type of variable, and the syntax used.

5.3. Other Issues

5.3.1. Functions as Entities

In programming languages, any entity that can be stored in variables or passed as an argument to a function or returned as a value from a function are referred to as “first-class citizens.” Numerical values for example are usually first-class citizens as they can be stored in variables and passed around in functions.

Functional Programming is a programming language paradigm in which functions themselves are first-class citizens. That is, functions can be assigned to variables, functions can be passed to other functions as arguments, and functions can even return functions as a result. This is done as a matter of course in functional programming languages such as Haskell and Clojure, but many programming languages contain some functional aspects.

For example, some languages support the same concept by using function *pointers* which are essentially references to where the function is stored in memory. As a memory location is essentially a number, it can be passed around in functions and be stored in a variable. Purists would argue that this is not sufficient to call a function a “first-class citizen” in such a language. They may argue that a language must be able to create new functions at runtime for it to be considered a language in which functions are “true” first-class citizens.

In any case, there are several advantages to being able to pass functions around as arguments or store them in variables. Passing a function to another function as an argument gives you the ability to provide a [callback](#). A callback is simply a function that gets passed to another function as an argument. The idea is that the function that receives the callback will execute or “call back” the passed function at some point.

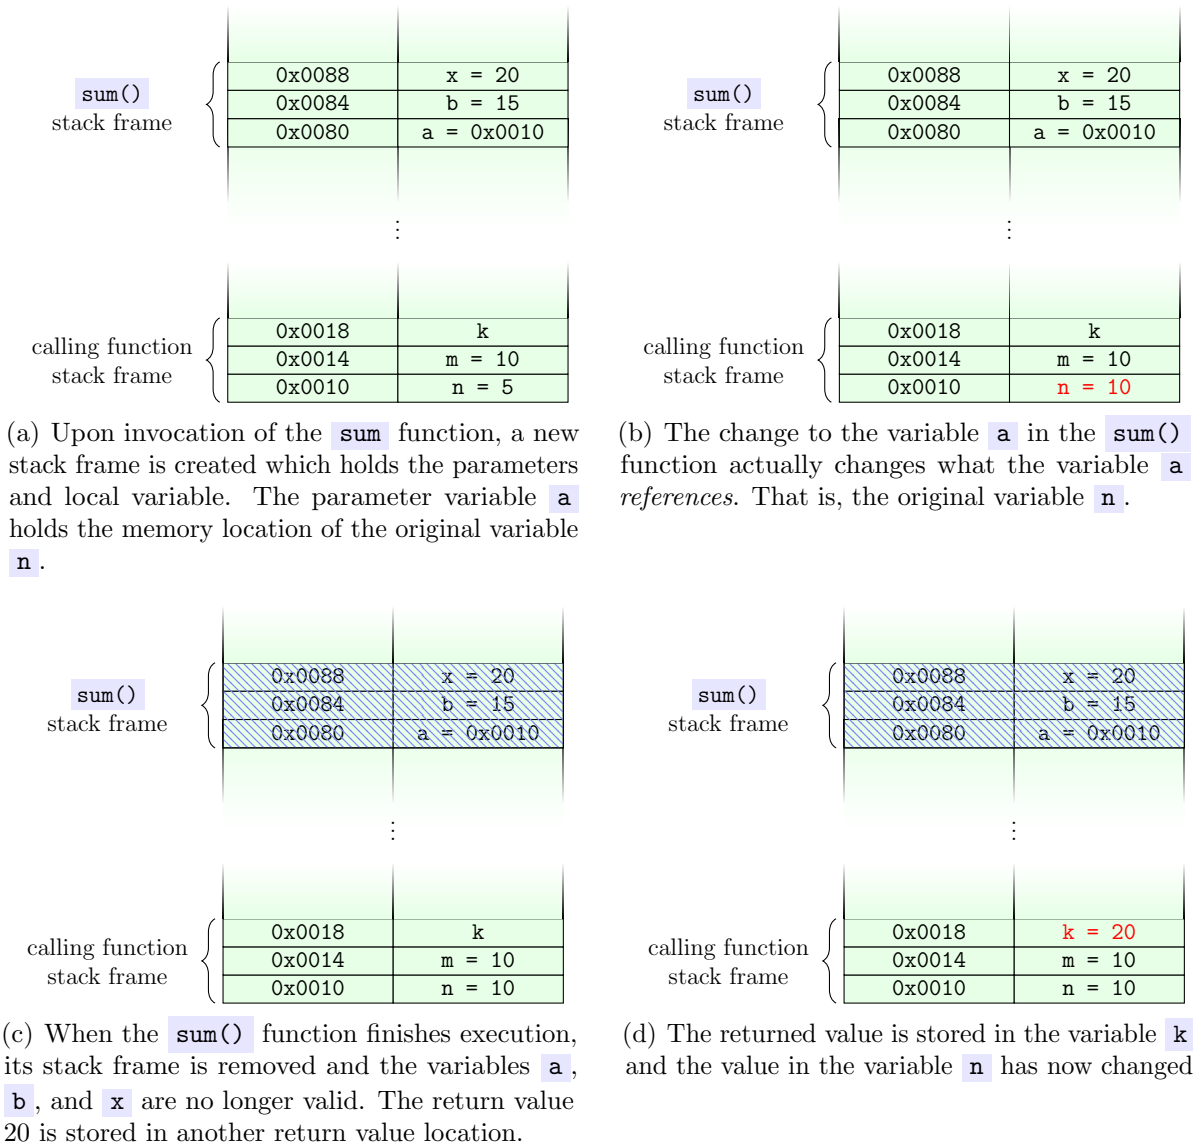


Figure 5.4.: Demonstration of Pass By Reference. Passing variables by reference means that the *memory address* of the variables are provided to the function. The function is able to make changes to the original variable because it knows where it is stored.

5. Functions

Using callbacks enables us to program a “generic” function that provides some generalized functionality. Then more specific behavior can be implemented in the callback function. For example, we could create a generic *sort* function that sorts elements in a collection. We could make the sort function generic so that it could sort any type of data: numbers, strings, objects, etc. A callback would provide more specific behavior on how to *order* individual elements in the sorted array.

As another example, consider [GUI Programming](#) in which we want to design a user interface. In particular, we may be able to create a button element in our interface. We need to be able to specify what happens when the user clicks the button. This could be achieved by passing in a function as a callback to “register” it with the click “event.”

A related issue is [anonymous functions](#). Typically, we simply want to create a function so that we can pass it as a callback to another function. We may have no intention of actually calling this function directly as it may not be of much use other than passing it as a callback. Some languages allow you to define a function “inline” without an identifier so that it can be passed to another function. Since the function has no name and cannot be invoked by other sections of the code (other than the function we passed it to), it is known as an anonymous function.

5.3.2. Function Overloading

Some languages do not allow you to define more than one function with the same name in the same scope. This is to prevent ambiguity in the code. When you write code to invoke a function and there are several functions with that name, which one are you actually calling?

Some languages *do* allow you to define multiple functions with the same name as long as they differ in either the number of or type of parameters. For example, you could define two absolute value functions with the same name, but one of them takes a floating point number while the other takes an integer as its parameter. This is known as [function overloading](#) because you are “overloading” the code by defining multiple functions with the same name.

The ambiguity problem is solved by requiring that each function with the same name differs in their parameters. If you invoke the absolute value function and pass it a floating point number, clearly you meant to call the first version. If you passed it an integer, it is clear that you intended to invoke the second version. Depending on the type and number of arguments you pass to a function, the compiler or interpreter is able to determine *which* version you intend to call and is able to make the right function call. This process is known as [static dispatch](#).

In a language without function overloading, we would be forced to use different names for functions that perform the same operation but on different types.

5.3.3. Variable Argument Functions

Many languages allow you to define special functions that take a *variable number* of parameters. Often they are referred to as “vararg” (short for variable argument) functions. The syntax for doing so varies as does how you can write a function to operate on a variable number of arguments (usually through some array or collection data structure).

The standard `printf` (print formatted) function found in many languages is a good example of a vararg function. The `printf` function allows you to use one function to print any number of variables or values. Without a vararg function, you would have to implement a `printf` version for no arguments, 1 argument, 2 arguments, etc. Even then, you would only be able to support up to n arguments for as many functions as you defined. By using a vararg function, we can write a single function that operates on all of these possibilities.

5.3.4. Optional Parameters & Default Values

Suppose that you define a function which has, say, three parameters. Now suppose you invoke the function but only provide it 2 of the 3 arguments that it expects. Some languages would not allow this and it would be considered a syntax or runtime error. Yet other languages may have very complex rules about what happens when an argument is omitted. Some languages allow you to omit some arguments when calling functions as a feature of the language. That is, the parameters to a function are *optional*.

When a language allows parameters to be optional, it usually also allows you to define *default values* to the parameters if the calling function does not provide them. If a user calls the function without specifying a parameter, it takes on the default value. Alternatively, the default could be a non-value like “null” or “undefined.” Inside the function you could implement logic that determined whether or not a parameter was passed to the function and alter the behavior of the function accordingly.

5.4. Exercises

Exercise 5.1. Recall that the *greatest common divisor* (gcd) of two positive integers, a and b is the largest positive integer that divides both a and b . Adapt the solution from Exercise 4.7 into a function. If the language you use supports it, return the gcd via a pass by reference variable.

Exercise 5.2. Write a function that *scales* an input x to its scientific notation scale so that $1 \leq x < 10$. If your language supports pass by reference, the amount that x is shifted should be stored in a pass-by-reference parameter. For example, a call to this function with $x = 314.15$ should return 3.1415 and the amount it is scaled by is $n = -2$.

5. Functions

Exercise 5.3. Write a function that returns the most significant digit of a floating point number. The function should only return an integer in the range $1 - -9$ (it should return zero only if $x = 0$).

Exercise 5.4. Write a function that, given an integer x , sums the values of its digits. That is, for $x = 29423$ the sum $2 + 9 + 4 + 2 + 3 = 20$.

Exercise 5.5. Write a function to convert radians to degrees using the formula,

$$\text{deg} = \frac{180 \cdot \text{rad}}{\pi}$$

Write another function to covert degrees to radians.

Exercise 5.6. Write functions to compute the diameter, circumference and area of a circle given its radius. If your language supports pass by reference, compute all three of these with one function.

Exercise 5.7. The *arithmetic-geometric* mean of two numbers x, y , denoted $M(x, y)$ (or $\text{agm}(x, y)$) can be computed iteratively as follows. Initially, $a_1 = \frac{1}{2}(x + y)$ and $g_1 = \sqrt{xy}$ (i.e. the normal arithmetic and geometric means). Then, compute

$$\begin{aligned} a_{n+1} &= \frac{1}{2}(a_n + g_n) \\ g_{n+1} &= \sqrt{a_n g_n} \end{aligned}$$

The two sequences will converge to the same number which is the arithmetic-geometric mean of x, y . Obviously we cannot compute an infinite sequence, so we compute until $|a_n - g_n| < \epsilon$ for some small number ϵ .

Exercise 5.8. Write a function to compute the annual percentage yield (APY) given an annual percentage rate (APR) using the formula

$$\text{APY} = e^{\text{APR}} - 1$$

Exercise 5.9. Write a function that will compute the air distance between two locations given their latitudes and longitudes. Use the formula as in Exercise 2.14.

Exercise 5.10. Write a function to convert a color represented in the RGB (red-green-blue) color model (used in digital monitors) to a CMYK (cyan-magenta-yellow-key) used in printing. RGB values are integers in the range $[0, 255]$ while CMYK are fractional numbers in the range $[0, 1]$. To convert to CMYK, you first need to scale each integer value to the range $[0, 1]$ by simply computing

$$r' = \frac{r}{255}, \quad g' = \frac{g}{255}, \quad b' = \frac{b}{255}$$

and then using the following formulas:

$$\begin{aligned} K &= 1 - \max\{r', g', b'\} \\ C &= (1 - r' - k)/(1 - k) \\ M &= (1 - g' - k)/(1 - k) \\ Y &= (1 - b' - k)/(1 - k) \end{aligned}$$

Exercise 5.11. Write a function to convert from CMYK to RGB using the following formulas.

$$\begin{aligned}r &= 255 \cdot (1 - C) \cdot (1 - K) \\g &= 255 \cdot (1 - M) \cdot (1 - K) \\b &= 255 \cdot (1 - Y) \cdot (1 - K)\end{aligned}$$

Exercise 5.12. Write some functions to convert an RGB color to a gray scale, “removing” the color values. An RGB color value is grayscale if all three components have the same value. To transform a color value to grayscale, there are several possible techniques. The average method simply sets all three values to the average:

$$\frac{r + g + b}{3}$$

The lightness method averages the most prominent and least prominent colors:

$$\frac{\max\{r, g, b\} + \min\{r, g, b\}}{2}$$

The luminosity technique uses a weighted average to account for a human perceptual preference toward green:

$$0.21r + 0.72g + 0.07b$$

Exercise 5.13. Adapt the methods to compute a square root in Exercise 4.22 into functions.

Exercise 5.14. Adapt the methods to compute the natural logarithm in Exercise 4.23 into functions.

Exercise 5.15. Weight (mass in the presence of gravity) can be measured in several scales: kilogram force (kgf), pounds (lbs), ounces (oz), or Newtons (N). To convert between these scales, you can use the following facts:

- 1 kgf is equal to 2.20462 pounds
- There are 16 ounces in a pound
- 1 kgf is equal to 9.80665 Newtons

Write a collection of functions to convert between these scales.

Exercise 5.16. Length can be measured by several different units. We will concern ourselves with the following scales: kilometer, mile, nautical mile, and furlong. A measure in each one of these scales can be converted to another using the following facts.

- One mile is equivalent to 1.609347219 kilometers
- One nautical mile is equivalent to 1.15078 miles

5. Functions

- A furlong is $\frac{1}{8}$ -th of a mile

Write a collection of functions to convert between these scales.

Exercise 5.17. Temperature can be measured in several scales: Celsius, Kelvin, Fahrenheit, and Newton. To convert between these scales, you can use the following conversion table.

From/To	Celsius	Kelvin	Fahrenheit	Newton
Celsius	–	$c + 273.15$	$c \frac{9}{5} + 32$	$c \frac{33}{100}$
Kelvin	$k - 273.15$	–	$\frac{9}{5}k - 459.67$	$.33k - 90.1395$
Fahrenheit	$(f - 32) \frac{5}{9}$	$\frac{5}{9}f + 255.372$	–	$\frac{11}{60}f - \frac{88}{15}$
Newton	$n \frac{100}{33}$	$\frac{100}{33}n + 273.15$	$\frac{60}{11}n + 32$	–

Table 5.1.: Conversion Chart

Write a collection of functions to convert between these scales.

Exercise 5.18. Energy can be measured in several different scales: calories (c), joules (J), ergs (erg) and foot-pound force (ft-lbf) among others. To convert between these scales, you can use the following facts:

- 1 erg equals $1.0 \times 10^{-7} J$
- 1 ft-lbs equals 1.3558 joules
- 1 calorie is equal to 4.184 joules

Write a collection of functions to convert between these scales.

Exercise 5.19. Pressure is a measure of force applied to the surface of an object per unit area. There are several units that can be used to measure pressure:

- Pascal (Pa) which is one Newton per square meter
- Pound-force Per Square Inch (psi)
- Atmosphere (atm) or standard atmospheric pressure
- The torr, an absolute scale for pressure

To convert between these units, you can use the following formulas.

- 1 psi is equal to 6,894.75729 Pascals, 1 psi is equal to 0.06804596 atmospheres
- 1 atmosphere is equal to 101,325 Pascals
- 1 torr is equal to $\frac{1}{760}$ atmosphere and $\frac{101,325}{760}$ Pascals

Write a collection of functions to convert between these scales.

6. Error Handling

Writing perfect code is difficult. The more complex a system or code base, the more likely it is to have [bugs](#). That is, flaws or mistakes in a program that result in incorrect behavior or unintended consequences. The term “bug” has been used in engineering for quite a while. The term was popularized in the context of computer systems by Grace Hopper who, when working on the Naval Mark II computer in 1946, tracked a malfunction to a literal bug, a moth, trapped in a relay [\[2\]](#).

Some of the biggest modern engineering failures can be tracked to simple software bugs. For example, on September 26th, 1983 a newly installed Soviet early warning system gave indication that nuclear missiles had been launched on the Soviet Union by the United States. Stanislav Petrov, a lieutenant colonel in the Soviet Air Defense Forces and duty officer at the time, did not trust the new system and did not report the incident to superiors who may have ordered a counter strike. Petrov was correct as the false alarm was caused by sunlight reflections off of high altitude clouds as well as other bugs in the newly deployed system [\[20\]](#).

In September 1999 the Mars Climate Orbiter, a project intended to study the Martian climate and atmosphere was lost after it entered into the upper atmosphere of Mars and disintegrated. The error was due to a subsystem that measured the craft’s momentum in non-standard pound force per second when all other systems expected the standard newton second unit [\[1\]](#). The loss of the project was calculated at over \$125 million.

There are numerous other examples, some that have caused inconvenience to users (such as the Zune bug mentioned in [Section 4.5.2](#)) to bugs in medical devices that have cost dozens of lives to those resulting in the loss of millions of dollars [\[6\]](#).

In some sense, Software Engineering and programming is unique. If you build a bridge and forget one bolt its likely not going to cause the bridge to collapse. If you draw up plans for a development and the land survey is a few inches off overall, its not a catastrophic problem. However, if you forget one character or are off by one number in a program, it can cause a complete system failure.

There are a variety of reasons for why bugs make it into systems. Bugs could be the result of a fundamental misunderstanding of the problem or requirements. Poorly managed projects and the pressure of time constraints to deliver a project may make developers more careless. A lack of proper testing may mean many more bugs survive the development process than otherwise should have. Even expert programmers can overlook a simple mistake when writing thousands of lines of code.

6. Error Handling

Given the potential for error, it is important to have good software development methodologies that emphasize testing a system at all levels. Working in teams where regular code reviews are held so that colleagues can examine, critique, and catch potential bugs are essential for writing robust code.

WHERE TO PLACE THIS?

Much of what we now consider Software Engineering was pioneered by people like Margaret Hamilton who was the lead Apollo flight software designer at NASA. During the Apollo 11 Moon landing (1969), an error in one system caused the lander's computer to become overworked with data. However, because the system was designed with a robust architecture, it could detect and handle such situations by prioritizing more important tasks (those related to landing) over lower priority tasks. The resilience that was built into the system is credited with its success [9].

END

Modern coding tools and techniques can also help to improve the robustness of code. For example, [debuggers](#) are tools that help a developer [debug](#) (that is, find and fix the cause of an error) a program. Debuggers generally allow you to simulate the execution of a program statement by statement and view the current state of the program such as variable values. You can “step through” the execution line by line to find where an error occurs in order to localize an identify a bug.

Other tools allow you to perform [static analysis](#) on source code to search for *potential* problems. That is, problems that are not syntax errors and are not necessarily bugs that are causing problems, but instead are [anti-patterns](#) or [code smells](#). Anti-patterns are essentially common bad-habits that can be found in code. They are an *attempted* solution to a commonly encountered problem but which don't actually solve the problem or introduces new problems. Code smells are “symptoms” in a source code that indicate a possible deeper design or implementation flaw. Failure to adhere to good programming principles such as properly initializing variables or failure to check for null values are examples of smells. Static analysis tools automatically examine the code base for potential issues like these. For example, a [lint](#) (or linter) is a tool that can examine source code suspicious or non-portable code or code that does not comply with generally accepted standards or ways of doing things.

Even if code contains no bugs, it is still susceptible to errors. For example, a program could connect to a remote database to pull and process data. However, if the network connection is temporarily unavailable, the program will not be able to execute properly. Because of the potential of such errors, it is important to write robust and resilient code. We must anticipate possible error conditions and write code to detect, prevent, or recover from such errors. Generally, this is referred to as *error handling*.

6.1. Error Handling

In general, errors are potential conditions or situations that can be readily be anticipated by a developer. For example, if we write code to open and process a file, there are several things that could go wrong. The file may not exist, or we may not have permissions to read it, or the formatting in the file may be corrupted or not as expected. Still yet, everything could be fine with the file, but it may contain erroneous or invalid values.

If an error can be anticipated, we may be able to write code that detects the particular error condition and *handles* it by executing code that may be able to recover from the error condition. In the case of a missing file for example, we may be able to prompt the user for an alternate file.

We may be able to detect but not necessarily recover from certain errors. For example, if the file has been corrupted in example above, there may not be a way to properly “fix” it. If it contains invalid data, we may not even want the program to fix it as it may indicate a bug or other issue that needs to be addressed. Still yet, there may be some error conditions that we cannot recover from at all as they are completely unexpected. In such instances, we may want the error to result in the termination of the program in which case the error is considered *fatal*.

6.2. Error Handling Strategies

There are several general strategies for performing error handling. We’ll look at two general methods here: defensive programming and exceptions.

6.2.1. Defensive Programming

Defensive programming is a “look before you leap” strategy. Suppose we have a potentially “dangerous” section of code; that is, a line or block of code whose execution could encounter an error condition. Before we execute the code, we perform a check to see if the error condition is present (usually using a conditional statement). If the error condition does not hold, then we proceed with the code as normal. However, if the error condition does hold, instead of executing the code, we execute alternative code that *handles* the error.

For example, suppose we are about to divide by a number. To prevent a division by zero error, we can check if our denominator is zero or not. If it is, then we raise or handle the error instead of performing the division.

What should be done in such a case? We could, as an alternative, use a predefined value as a result instead. Or we could notify the user and ask for an alternative. Or we could log the error and proceed as normal. Or we could decide that the error is so egregious that it should be fatal and terminate the execution of the program.

6. Error Handling

Which is the right way to handle this error? It depends on your design requirements really. This raises the question, though: “who” is responsible for making these decisions? Suppose we’re designing a function for a library that is for use not just by our project but others as well (as is the case with the standard library functions). Further, the function we’re designing could have multiple different error conditions that it checks for. In this scenario there are two entities that could handle the errors: the function itself and the code that invokes the function.

Suppose that we decide to handle the errors inside the function. That is, as designers of the function, we’ve made the decision to handle the errors *for* the user (the code that invokes our function). Regardless of how we decide to handle the errors, this design decision has essentially taken any decision making ability away from users. This is not very flexible for someone using our code. If they have different design considerations or requirements, they may need or want to handle the errors in a different way than we did.

Now suppose that we decide *not* to handle the errors inside our function. Defensive programming may still be used to prevent the execution of code that results in an error. However, we now need a way to *communicate* the error condition to the calling function so that it can know what type of error happened and handle it appropriately.

Error Codes

One common pattern to communicate errors to a calling function is to use the return type as an *error code*. Usually this is an integer type. By convention 0 is used to indicate “no error” and various other non-zero values are used to indicate various types of errors. Depending on the system and standard used, error codes may have a predefined value or may be specific to an application or library.

One problem with using the return type to indicate errors is that functions are no longer able to use the return type to return an actual computed value. If a language supports pass by reference, then this is not generally a problem. However, even with such languages there are situations where the return type *must* be used to return a value. In such cases, the function can still communicate a general error message by returning some flag value such as null.

Alternatively, a language may support error codes by using a shared global variable that can be set by a function to indicate an error. The calling function can then examine the variable to see if an error occurred during the invocation of the function.

Limitations

Defensive programming has its limitations. Let’s return to the example of processing a file. To check for all four of the error conditions we identified, we would need a series of

checks similar to the following.

```

1 IF file does not exists THEN
2   |   return an error code
3 END
4 IF we do not have permissions THEN
5   |   return an error code
6 END
7 IF the file is corrupted THEN
8   |   return an error code
9 END
10 IF the file contains invalid values THEN
11   |   return an error code
12 END
13 process file data

```

A problem arises when an error condition is checked and does not hold. Then, later in the execution, circumstances change and the error condition then holds. However, since it was already checked for, the program remains under the assumption that the error condition does not hold. For example, suppose that another process or program deletes the file that we wish to process after its existence has been checked but before we start processing it.

Because of the sequential nature of our program, this type of error checking is susceptible to these issues.

6.2.2. Exceptions

An **exception** is an event or occurrence of an anomalous, erroneous or “exceptional” condition that requires special handling. Exceptions interrupt the normal flow of control in a program by handing the flow of control over to *exception handlers*.

Languages usually support exception handling using a try-catch control structure such as the following.

```

try {
    //potentially dangerous code here
} catch(Exception e) {
    //exception handling code here
}

```

The **try** is used to encapsulate potentially dangerous code, or simply code that would

6. Error Handling

fail if an error condition occurs. If an error occurs at some point within the `try` block, control flow is immediately transferred to the `catch` block. The `catch` block is where you specify *how* to handle the exception. If the code in the `try` block does not result in an exception, then control flow will skip over the `catch` statement and resume normally after.

It is important to understand how exceptions interrupt the normal control flow. For example, consider the following pseudocode

```
try {
    statement1;
    statement2;
    statement3;
} catch(Exception e) {
    //exception handling code here
}
```

Suppose `statement1` executes with no error but that when `statement2` executes, it results an exception. Control flow is then transferred to the `catch` block, skipping `statement3` entirely. In general, there may not be a mechanism for your `catch` block to recover and execute `statement3`. Therefore, maybe necessary to make your `try-catch` blocks fine-grained, perhaps having only a single statement within the `try` statement.

Some languages only support a generic `Exception` and the type of error may need to be communicated through other means such as a string error message. Still other languages may support many different types of exceptions and you may be able to provide *multiple* `catch` statements to handle each one differently. In such languages, the order in which you place your `catch` statements may be important as similar to an `if-else-if` statement, the first one that matches will be the one that executes. Thus, it is best practice to order your `catch` blocks from the most specific to the most general.

Some languages also support a third `finally` control statement as in the following example.

```
try {
    //potentially dangerous code here
} catch(Exception e) {
    //exception handling code here
} finally {
    //unconditionally executed code here
}
```

The `try-catch` block operates as previously described. However, the `finally` block will execute *regardless* of whether or not an exception was raised. If no exception was raised, then the `try` block will fully execute and the `finally` block will execute immediately after. If an exception was raised, control flow will be transferred to the

`catch` block. After the `catch` block has executed, the `finally` block will execute.

`finally` blocks are generally used to handle resources that need to be “cleaned up” whether or not an exception occurs. For example, opening a connection to a database to retrieve and process data. Whether or not an exception occurs during this process the connection will need to be properly closed as it represents a substantial amount of resources (a network connection, memory and processing time on both the server and client machines, etc.). Failure to properly close the connection may result in wasted resources. By placing the clean up code inside a `finally` statement, we can be assured that it will execute regardless of an error or exception.

In addition to handling exceptions, a language may allow you to “throw” usually by using the keyword `throw`. In this way you can also practice defensive programming. You could write a conditional statement to check for an error condition and then `throw` an exception.

6.3. Exercises

Exercise 6.1. Rewrite the function to compute the GCD in Exercise 5.1 to handle invalid inputs.

Exercise 6.2. Rewrite the function to compute statistics of a circle in Exercise 5.6 to handle invalid input (negative radius).

Exercise 6.3. Rewrite the function to compute the annual percentage yield in Exercise 5.8 to handle invalid input.

Exercise 6.4. Rewrite the function to compute air distance in Exercise 5.9 to handle invalid input (latitude/longitude values outside the range $[-180, 180]$).

Exercise 6.5. Rewrite the function to convert from RGB to CMYK in Exercise 5.10 to handle invalid inputs (values outside the range $[0, 255]$).

Exercise 6.6. Rewrite the function to convert from CMYK to RGB in Exercise 5.11 to handle invalid inputs.

Exercise 6.7. Rewrite the square root functions from Exercise 5.13 to handle invalid inputs.

Exercise 6.8. Rewrite the natural logarithm functions from Exercise 5.14 to handle invalid inputs.

Exercise 6.9. Rewrite the weight conversion functions from Exercise 5.15 to handle invalid inputs.

Exercise 6.10. Rewrite the length conversion functions from Exercise 5.16 to handle invalid inputs.

6. *Error Handling*

Exercise 6.11. Rewrite the temperature conversion functions from Exercise 5.17 to handle invalid inputs.

Exercise 6.12. Rewrite the energy conversion functions from Exercise 5.18 to handle invalid inputs.

Exercise 6.13. Rewrite the pressure conversion functions from Exercise 5.19 to handle invalid inputs.

7. Arrays, Collections & Dynamic Memory

Rarely do we ever deal with a single piece of data in a program. Instead, most data is made up of a collection of similar elements. A program to compute grades would be designed to operate on an entire roster of students. Scientific data represents a collection of many different samples. A bank maintains and processes many different accounts, etc.

Arrays are a way to collect similar pieces of data together in an *ordered collection*. The pieces of data stored in an array are referred to as *elements* in an ordered manner. That is, there is a “first” element, “second” element, etc. and a “last” element. Though the elements are ordered, they are not necessarily *sorted* in any particular manner. Instead, the order is usually determined by the order in which you place elements into the array.

Some languages only allow you to store the same types of elements in an array. For example, an integer array would only be able to store integers, an array of floating-point numbers would only be able to store floating-point numbers. Other languages allow you to create arrays that can hold *mixed elements*. A mixed array would be able to hold elements of any type, so it could hold integers, floating-point numbers, strings, objects, or even other arrays.

Some languages treat arrays as full-fledged object types that have not only elements as their content, but methods that can be called to manipulate or transform the contents of the array. Other languages treat arrays as a more primitive type, simply using arrays as storage data structures.

Languages can vary greatly in how they implement and represent arrays of elements, but many have the same basic usage patterns allowing you to create arrays and manipulate their contents.

7.1. Basic Usage

Creating Arrays

Though there can be great variation in how a language uses arrays, there are some commonalities. Languages may allow you to create *static* arrays or *dynamically allocated arrays* (see Section 7.2 below for a detailed discussion). Static arrays are generally created

7. Arrays, Collections & Dynamic Memory

index	0	1	2	3	4	5	6	7	8	9
contents	2	3	5	7	11	13	17	19	23	29

Figure 7.1.: An integer array of size 10. Using zero-indexing, the first element is at index 0, the last at index 9.

using the program stack space while dynamically allocated arrays are stored in the *heap*. In either case you generally declare an array by specifying its size. In statically typed languages, you must also declare the array's type (integer, floating-point, etc.).

Indexing Arrays

Once an array has been created you can use it by assigning values to it or by retrieving values from it. Because there is more than one element, you must specify *which* element you are assigning or retrieving. This is generally done through *indexing*. An *index* is an integer that specifies an element in the array. The index is used in conjunction with (usually) square brackets and the array's identifier. For example, if the array's identifier is `arr` and the index is an integer value stored in the variable `i`, we would refer to the *i*-th element using the syntax `arr[i]`. An example is presented in Figure 7.1.

For most programming languages, indices start at zero. This is known as zero-indexing.¹ Thus, the first element is at `arr[0]`, the second at `arr[1]` etc. When an array is stored in memory, each element is usually stored one after the other in one contiguous space in memory. Further, each element is of a specific type which is represented using a fixed number of bytes in memory. Thus the index actually acts as an *offset* in memory from the beginning of the array. For example, if we have an array of integers which each take 4 bytes each, then the 5th element would be stored at index 4, which is an offset equal to $4 \times 4 = 16$ bytes away from the beginning of the array. The first element, being at index 0 is thus at $4 \times 0 = 0$ bytes from the beginning of the array (that is, the first element is at the beginning of the array).

Once an element has been indexed, it can essentially be treated as a regular variable, assigning and retrieving values as you would regular variables. Care must be taken so that you do not make a reference to an element that does not exist. For example, using a negative index or an index $i \geq n$ in an array of n elements. Depending on the language, index an array element that is out-of-bounds may result in undefined behavior, an exception being thrown, or a corruption of memory.

¹Though, some languages do use 1-indexing, there are very strong arguments in favor of zero-indexing [11].

Iteration

Since we can simply index elements in an array, it is natural to iterate over elements in an array using a for-loop. We can create a for-loop using an index variable i which starts at 0, and increments by one on each iteration, accessing the i -th element using the syntax described above, `arr[i]`. One issue is that such a loop would need to know how large the array is in order to define a terminating condition.

```

1  $n \leftarrow$  size of array arr
2 FOR  $i = 0, \dots, (n - 1)$  DO
3   | process element arr[ $i$ ]
4 END

```

Some languages build the size of the array into a property that can be accessed. Java, for example, has a `arr.length` property. Other languages provide functions that you can pass an array to in order to get its size. Still other languages (such as C), place the burden of “bookkeeping” the size of an array on you, the programmer. Whenever you pass an array to a function you need to also pass a size parameter that informs the function of how many elements are in the array. Yet other functions may also require you not only tell it the size of the array, but also the size of each element in the array.

Some languages also support a basic *foreach* loop (cf. Section 4.4). A foreach loop is *syntactic sugar* that allows you to iterate over the elements in an array (usually in order) without the need for boilerplate code that creates and increments an index variable.

```

1 FOREACH element a in arr DO
2   | process element a
3 END

```

The actual syntax may vary if a language supports such a loop.

Using Arrays in Functions

Most programming languages allow you to use arrays as both function parameters and as return types. That is, you can pass arrays to functions and functions can be defined that return arrays. Typically, when arrays are passed to functions, they are passed by reference so as to avoid making an entirely new copy of the array. As a consequence, if the function makes changes to the array elements, those changes may be realized in the calling function. Sometimes you may want to design functions that make changes to an array. However, sometimes you may not want the function to make changes to the

passed array. Some languages allow you to use various keywords to prevent any changes to the passed array.

If a function is designed to return an array, care must be taken to ensure that the correct type of array is returned. Recall that static arrays are allocated on the call stack. It would be inappropriate to return static arrays from a function as the array is part of the stack frame that is destroyed when the function returns control back to the calling function (we discuss this in detail below). Instead, if a function returns an array, it should be an array that has been dynamically allocated (on the heap).

7.2. Static & Dynamic Memory

Recall that some arrays can be declared as *static* arrays, meaning that when you declare them, they are allocated and stored on the program's call stack within the stack frame in which they are declared. For example, if a function `foo()` creates a static array of 5 integers, each requiring 4 bytes, then 20 contiguous bytes are allocated on the stack frame for `foo()` to store the static array.

This can cause several potential problems. First, the typical stack space allocated for a program is relatively small. It can be as large as a couple of [Megabytes \(MBs\)](#) or on some older systems or those with limited resources, even on the order of a few hundred [Kilobytes \(KBs\)](#). When dealing with data of any substantial size, you could quickly run out of stack space, resulting in a *stack overflow*.

Another problem arises if we want to return a static array from a function. Recall that when a function returns control to the calling function, its stack frame is popped off the top and goes out-of-scope (cf. [Section 5.2](#)). Since the array is part of the stack frame of the function, it too goes out of scope. Depending on how the system works, the contents of the frame may be completely changed in the “bookkeeping” process of returning from the function. Even if the contents remain unchanged when the function returns, they will almost certainly be overwritten when another function call is made and a new stack frame overwrites the old one.

For this reason, static arrays are of very limited use. They must be kept small and cannot be returned from a function.

Demonstration in C

To make this concept a bit more clear, we'll use a concrete example in the C programming language. Consider the program code in [Figure 7.2](#). Here, we have a function `foo()` that creates a static integer array of size 5, `int b[5];`. This memory is allocated on the stack frame and then assigned values. Printing them in the function will give the expected results,


```

b[0] = 5
b[1] = 10
b[2] = 15
b[3] = 20
b[4] = 25

```

```

1  #include<stdlib.h>
2  #include<stdio.h>
3
4  int * foo(int n) {
5      int i;
6      int b[5];
7      for(i=0; i<5; i++) {
8          b[i] = n*i;
9          printf("b[%d] = %d\n", i, b[i]);
10     }
11     return b;
12 }
13
14 int main(int argc, char **argv) {
15     int i, m = 5;
16     int *a = foo(m);
17     for(i=0; i<5; i++) {
18         printf("a[%d] = %d\n", i, a[i]);
19     }
20     return 0;
21 }

```

Figure 7.2.: Example returning a static array

However, when the function `foo()` ends execution and returns control back to the `main()` function, (sometimes called *unwinding*), the contents of `foo()`'s stack frame are altered as part of the process. Some of the contents are the same, but elements have been completely altered. Printing the “returned” contents of the array gives us garbage:

```

a[0] = 1564158624
a[1] = 32767
a[2] = 15
a[3] = 20
a[4] = -626679356

```

This is not an issue when returning primitive types as the return value is placed in a special memory location available to the calling function. Even in our example, the return value is properly communicated to the calling function: its just that the returned

7. Arrays, Collections & Dynamic Memory

value is a *pointer* to the array's location (which happens to be a memory address in the “stale” stack frame). The stack frames are depicted in Figure 7.3.

Stack Frame	Variable	Address	Content
		⋮	⋮
foo	b[4]	0x5c44cb76	25
	b[3]	0x5c44cb72	20
	b[2]	0x5c44cb68	15
	b[1]	0x5c44cb64	10
	b[0]	0x5c44cb60	5
	i	0x5c44cb56	5
	n	0x5c44cb52	5
		⋮	⋮
main	a	0x5c44cb34	NULL
	m	0x5c44cb30	5
	i	0x5c44cb26	0

(a) Program stack at the end of the execution of `foo()` prior to its returning control back to `main()`.

Stack Frame	Variable	Address	Content
		⋮	⋮
foo	b[4]	0x5c44cb76	-626679356
	b[3]	0x5c44cb72	20
	b[2]	0x5c44cb68	15
	b[1]	0x5c44cb64	32767
	b[0]	0x5c44cb60	1564158624
	i	0x5c44cb56	5
	n	0x5c44cb52	5
		⋮	⋮
main	a	0x5c44cb34	0x5c44cb60
	m	0x5c44cb30	5
	i	0x5c44cb26	0

(b) Upon returning, the stack frame is no longer valid; the pointer variable `a` points to a stack memory address but the frame and its local variables are no longer valid. Some have been overwritten with other values. Subsequent usage or access of the values in `a` are undefined behavior.

Figure 7.3.: Illustration of the pitfalls of returning a static array in C. Static arrays are locally scoped and exist only within the function/block in which they are declared. The program stack frame in which the variables are stored is invalid when the function returns control back to the calling function. Depending on how the system/compiler/language handles this *unwinding* process, values may be changed, unavailable, etc.

7.2.1. Dynamic Memory

The solution is to use *dynamically allocated arrays*. Such arrays are not allocated and stored in the program call stack, but instead are stored in another area called the *heap*. In fact, because of the shortcomings of static arrays, some languages only allow you to use dynamically allocated arrays even if it is done so implicitly.

Recall that when a program is loaded into memory, its code is placed on the program call stack in memory. On top of that, any static data (global variables or data for example) is placed and subsequent function calls place new stack frames on top of that. In addition, at the “other end” of the program’s memory space, the *heap* is allocated. The heap is a “pile” of memory like the stack is, but it is less structured. The stack is one contiguous piece of memory, but the heap may have “holes” in it as various chunks of it are *allocated* and *deallocated* for the program. In general, the heap is larger but allocation and deallocation is a more involved and more costly process while the stack is smaller and faster to allocate/deallocate stack frames from.

Initially a program is allocated a certain amount of memory for its heap. When a program attempts to dynamically allocate memory, say for a new array of integers, it makes a request to the operating system for a certain amount of memory (a certain number of bytes). The system responds by allocating a chunk of the heap memory which the program can then use to store elements in the array. Usually, the memory space is stored as a pointer or reference. The reference is stored in a variable in a stack frame, but the actual contents of the array are stored in the heap space.

Depending on the language and system, if a program uses all of its heap space and runs out, the operating system may terminate the program or it may attempt to reserve even more memory for the program.

Memory Management

If a program no longer needs a dynamically allocated memory space, it should “clean up” after itself by deallocating or “freeing” the memory, releasing it back to the heap space so that it can be reused either by the program or some other program or process on the system. The process of allocating and deallocating memory is generally referred to as *memory management*. If a program does not free up memory, it may eventually run out and be forced to terminate. Even if it does not run out of available memory, its performance may degrade.

If a program has poor memory management and fails to deallocate memory when it is no longer needed, the memory “leaks”: the available memory is gradually lost because it is not released back to the heap for reallocation. Programs which such poor memory management are said to have a [memory leak](#). Sometimes this is a consequence of a [dangling pointer](#): when a program dynamically allocates a chunk of memory but then due to carelessness, loses the reference to the memory chunk, making it impossible to



Figure 7.4.: Depiction of Application Memory. The details of how application memory is allocated and how the stack/heap “grow” may vary depending on the architecture. The figure shows stack memory growing “upward” while heap allocation grows “downward.” Allocation and deallocation may fragment the heap space though.

free up.

Some languages have automatic [garbage collection](#) that handle memory management for us. The language itself is able to monitor the dynamically allocated pieces of memory and determine if any variable in the program still references it. If the memory is no longer referenced, it is “garbage” and becomes eligible to be “collected.” The system itself then frees the memory and makes it available to the program or operating system. In such “memory managed” languages, we are responsible for allocating memory, but are not (necessarily) responsible for deallocating it.

Even if a language offers automated memory management, it is still possible to have memory leaks and other memory allocation issues. That is, automated memory management does not solve all of our memory management problems. Moreover, it comes at a cost. The additional resources and overhead required to monitor memory can have a significant performance cost. However, with modern garbage collection systems and algorithms, the performance gap between garbage collected languages and user-managed memory languages has been shrinking.

In any case, all program memory is reclaimed by the operating system when the program terminates.


7.2.2. Shallow vs. Deep Copies

In most languages, an array variable is actually a *reference* to the array in memory. We could create an array referred to by a variable *A* and then create another reference variable *B* and set it “equal” to *A*. However, this is simply a [shallow copy](#). Both the reference variables refer to the same data in memory. Consequently, if we change the value of an element in one, the change is realized in both.


Often, we want a completely different copy, referred to as a [deep copy](#). With a deep copy, *A* and *B* would refer to different memory blocks. Changes to one would not affect the other. This distinction is illustrated in Figure [7.5](#).

7.3. Multidimensional Arrays


A normal array is usually one dimensional. One can think an array as a single “row” in a table that contains a certain number of entries. Most programming languages allow you to define *multidimensional* arrays. For example, two dimensional arrays would model having multiple rows in a full table. You can also view two dimensional arrays as matrices in mathematics. A *matrix* is a rectangular array of numbers that have a certain number of *rows* and a certain number of *columns*.

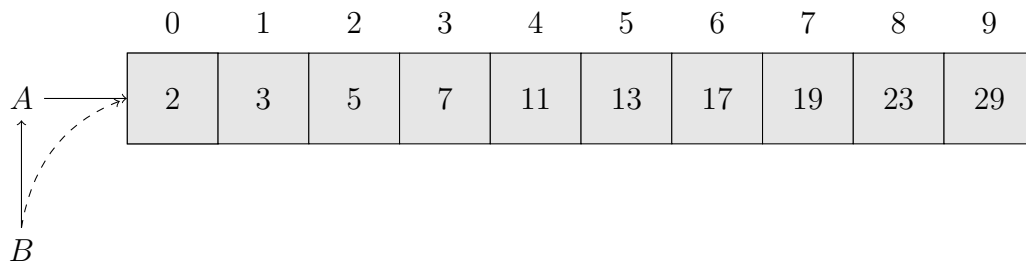


(a) A shallow copy. *B* refers to *A* which refers to the array. Thus, *B* implicitly refers to the same array.

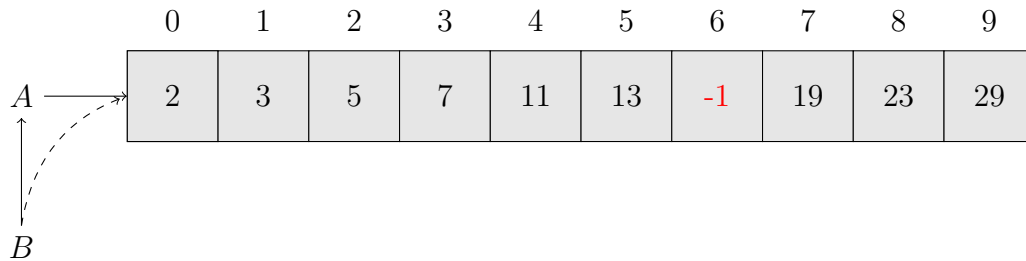

(b) When an element in a shallow copy is changed, `A[i] = -1;`, it is changed from the perspective of both *A* and *B*.

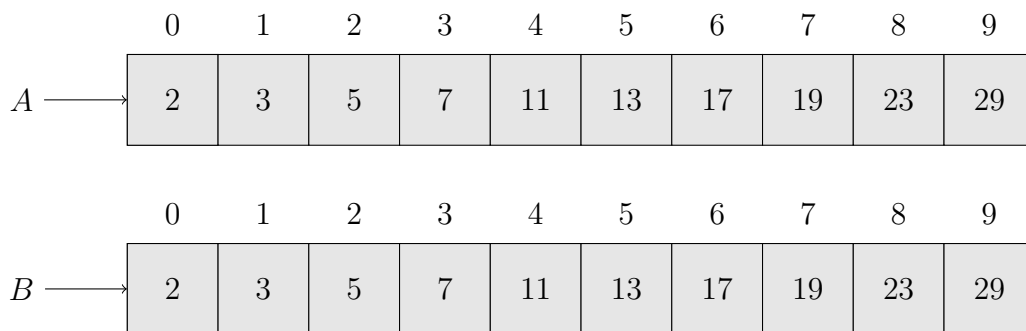

(c) A deep copy. *B* refers to its own copy of the array distinct from *A*. Both are stored in separate memory locations.

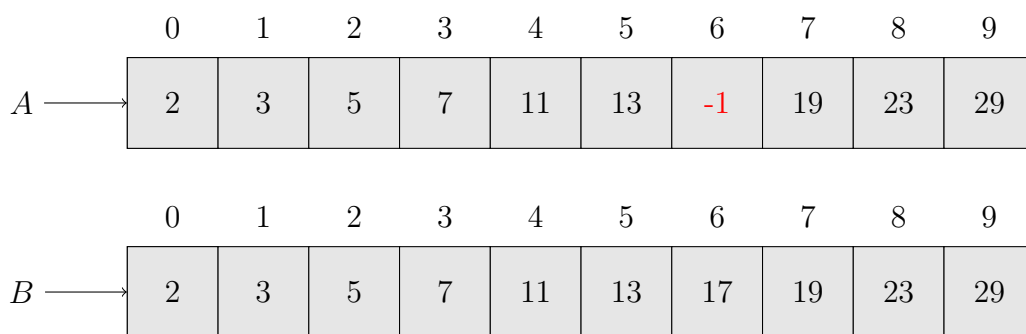

(d) When an element in a deep copy is changed, `A[i] = -1;`, it is changed only in the array *A*. The element in *B* is unaffected.

Figure 7.5.: Shallow copies are when two references refer to the same data in memory (a) and (b). Changes to one affect the other. Deep copies (c) and (d) are distinct data in memory, changes to one do not affect the other.

7. Arrays, Collections & Dynamic Memory

As an example, consider the following 2×3 matrix (it has 2 rows and 3 columns):

$$\begin{bmatrix} 1 & 9 & -8 \\ 2.5 & 3 & 5 \end{bmatrix}$$

In mathematics, entries in a matrix are indexed via their row and column. For example, $a_{i,j}$ would refer to the element in the i -th row and j -th column. Referring to the row first and column second is referred to as *row major* ordering. If the number of rows and the number of columns are the same, the matrix is referred to as a *square matrix*. For example, the following is a square, 10×10 matrix.

$$\begin{bmatrix} 2 & 68 & 9 & 44 & 80 & 79 & 77 & 59 & 27 & 2 \\ 3 & 86 & 22 & 42 & 58 & 24 & 45 & 39 & 7 & 47 \\ 5 & 7 & 17 & 12 & 29 & 56 & 68 & 14 & 65 & 3 \\ 7 & 35 & 64 & 69 & 79 & 56 & 52 & 77 & 82 & 85 \\ 11 & 55 & 36 & 5 & 25 & 6 & 22 & 25 & 72 & 37 \\ 13 & 20 & 37 & 74 & 3 & 53 & 87 & 70 & 3 & 78 \\ 17 & 72 & 68 & 26 & 11 & 6 & 63 & 70 & 29 & 16 \\ 19 & 59 & 6 & 26 & 87 & 18 & 82 & 27 & 75 & 19 \\ 23 & 73 & 30 & 80 & 51 & 14 & 34 & 67 & 59 & 58 \\ 29 & 48 & 2 & 39 & 18 & 21 & 33 & 28 & 40 & 34 \end{bmatrix}$$

We can do something similar in most programming languages. First, languages may vary in how you can create multidimensional arrays, but you usually have to provide a size for each dimension when you create them. Once created, you can index them by providing multiple indices. For example, with a two dimensional array, we could provide two indices each in their own square brackets `arr[i][j]` referring to the i -th row and j -th column. Multidimensional arrays usually use the same 0-indexing scheme as single dimensional arrays.

You can further generalize this and create 3-dimensional arrays, 4-dimensional arrays, etc. However, the use cases for arrays of dimension 3 and certainly for arrays of dimension 4 or greater are rare. If you need to store such data, it may be more appropriate to define a custom, user-defined structure or object (see Chapter 10) instead of a higher dimensional array.

We usually think of 2-dimensional arrays as having the same number of elements in each “row”. In the example above, both of the matrix’s rows had 3 elements in it. Some languages allow you to create 2-dimensional arrays with a different number of elements in each row. Special care must be taken to ensure that you do not index an element that does not exist.

7.4. Other Collections

Aside from basic arrays, many languages have rich libraries of other *dynamic* collections. Dynamic collections are not the same thing as dynamically allocated arrays. With a normal array, once created, its size is fixed and cannot, in general, be changed. However, dynamic collections can grow (and shrink) as needed when you add or remove elements from them.

Lists are ordered collections that are essentially dynamic arrays. Lists are ordered and are usually zero-indexed just like arrays. Lists are generally objects and provide methods that can be used to add, remove, and retrieve elements from the list. If you add an element to a list, the list will automatically grow to accommodate it, so its size is not fixed when created. Two common implementations of lists are array-based lists and linked lists. Array-based lists use an array to store elements. When the array fills up, the list allocates a new, larger array to hold more elements, copying the original contents over to the new array with a larger capacity. Linked lists hold elements in *nodes* that are linked together. Adding a new element simply involves creating a new node and linking it to the last element in the list.

Some languages also define what are called *sets*. Sets allow you to store elements dynamically just like lists, but sets are generally *unordered*. There is no concept of a first, second, or last element in a set. Iterating over the elements in a set could result in a different enumeration of the elements each time. Elements in sets are also usually unique. For example, a set containing integers would only ever contain one instance of each integer. The value 10, for example, would only ever appear once. If you added 10 to a set that already contained it, the operation would have no effect on the set.

Another type of dynamic array are *associative arrays* (sometimes called *dictionaries*). An associative array holds elements, but may not be restricted in how they are indexed. In particular, a language that supports associative arrays may allow you to use integers or strings as indices, or even any arbitrary object. Further, when using integers to index elements, indices need not be fully defined nor contiguous. In an associative array you could define an element at index 5 and then place the next element at index 10, skipping index 6 through 9 which would remain undefined.

One way to look at associative arrays is as a *map*. A map is a data structure that stores elements as key-value pairs. Both the keys and values could be any arbitrary type (integers or strings) or object depending on the language. You could map account numbers (stored as strings) to account objects, or vice versa. Using a smart data structure like a map can make data manipulation a lot easier and more straightforward.

7.5. Exercises

Exercise 7.1. Write a function to return the *index* of the maximum element in an array of numbers.

Exercise 7.2. Write a function to return the *index* of the minimum element in an array of numbers.

Exercise 7.3. Write a function to compute the mean (average) of an array of numbers.

Exercise 7.4. Write a function to compute the standard deviation of an array of numbers,

$$\sigma = \sqrt{\frac{1}{N} \sum_{i=1}^N (x_i - \mu)^2}$$

where μ is the mean of the array of numbers.

Exercise 7.5. Write a function that takes two arrays of numbers that are *sorted* and *merges* them into one array (returning a new array as a result).

Exercise 7.6. Write a function that takes an integer n and produces a new array of size n filled with 1s.

Exercise 7.7. Write a function that takes an array of numbers and computes returns the *median* element. The median is defined as follows:

- If n is odd, the median is the $\frac{n+1}{2}$ -th largest element
- If n is even, the median is the average of the $\frac{n}{2}$ and the $(\frac{n}{2} + 1)$ -th largest elements

Exercise 7.8. The dot product of two arrays (or vectors) of the same dimension is defined as the sum of the product of each of their entries. That is,

$$\sum_{i=1}^n a_i \times b_i$$

Write a function to compute the dot product of two arrays (you may assume that they are of the same dimension)

Exercise 7.9. The *norm* of an n -dimensional vector, $\vec{x} = (x_1, x_2, \dots, x_n)$ captures the notion of “distance” in a higher dimensional space and is defined as

$$\|\vec{x}\| = \sqrt{x_1^2 + \dots + x_n^2}$$

Write a function that takes an array of numbers that represents an n -dimensional vector and computes its norm.

Exercise 7.10. Write a function that takes two arrays A, B and creates and returns a new array that is the *concatenation* of the two. That is, the new array will contain all elements a followed by all elements in b .

Exercise 7.11. Write a function that takes an array of numbers A and an element x and returns true/false if A contains x

Exercise 7.12. Write a function that takes an array of numbers A , an element x and two indices i, j and returns true/false if A contains x somewhere between index i and j .

Exercise 7.13. Write a function that takes an array of numbers A and an element x and returns the *multiplicity* of x ; that is the number of times x appears in A .

Exercise 7.14. Write a function to compute a *sliding window* mean. That is, it computes the average of the first m numbers in the array. The next value is the average of the values index from 1 to m , then 2 to $m + 1$, etc. The last window is the average of the last m elements. Obviously, $m \leq n$ (for $m = n$, this is the usual mean). Since there is more than one value, your function will return a (new) array of means of size $n - m + 1$.

Exercise 7.15. Write a function to compute the *mode* of an array of numbers. The mode is the most *common* value that appears in the array. For example, if the array contained the elements 2, 9, 3, 4, 2, 1, 8, 9, 2, the mode would be 2 as it appears more than any other element. The mode may not be unique; multiple elements could appear the same, maximal number of times. Your function should simply return *a* mode.

Exercise 7.16. Write a function to find *all* modes of an array. That is, it should find all modes in an array and return a new array containing all the mode values.

Exercise 7.17. Write a function to filter out certain elements from an array. Specifically, the function will create a new array containing only elements that are greater than or equal to a certain threshold δ .

Exercise 7.18. Write a function that takes an array of numbers and creates a new “deep” copy of the array. In addition, the function should take a new “size” parameter which will be the size of the copy. If the new size is less than the original, then the new array will be a *truncated* copy. If the new size is greater then the copy will be *padded* with zero values at the end.

Exercise 7.19. Write a function that takes an array A and two indices i, j and returns a new array that is a subarray of A consisting of elements i through j .

Exercise 7.20. Write a function that takes two arrays A, B and creates and returns a new array that represents the *unique intersection* of A and B . That is, an array that contains elements that are in both A and B . However, elements should not be included more than once.

Exercise 7.21. Write a function that takes two arrays A, B and creates and returns a new array that represents the *unique union* of A and B . That is, an array that contains elements that are *either* in A or B (or both). However, elements should not be included more than once.

Exercise 7.22. Write a function that takes an array of numbers and returns the sum of its elements.

Exercise 7.23. Write a function that takes an array of numbers and two indices i, j and computes the sum of its elements between i and j inclusive.

Exercise 7.24. Write a function that takes *two* arrays of numbers and determines if they are *equal*: that is, each index contains the same element.

Exercise 7.25. Write a function that takes *two* arrays of numbers and determines if they both contain the same elements (though are not necessarily equal) regardless of their multiplicity. That is, the function should return true even if the arrays' elements appear a different number of times or in a different order. For example $[2, 2, 3]$ would be equal to an array containing $[3, 2, 3, 3, 3, 2, 2, 2]$.

Exercise 7.26. A *suffix array* is a lexicographically sorted array of all suffixes of a string. Suffix arrays have many applications in text indexing, data compression algorithms and in bioinformatics. Write a program that takes a string and produces its suffix array.

For example, the suffixes of `science` are `science`, `cience`, `ience`, `ence`, `nce`, `ce`, and `e`. The suffix array (sorted) would look something like the following.

```
ce
cience
e
ence
ience
nce
science
```

Exercise 7.27. An array of size n represents a *permutation* if it contains all integers $0, 1, 2, \dots, (n-1)$ exactly once. Write a function to determine if an array is a permutation or not.

Exercise 7.28. The k -th order statistic of an array is the k -th largest element. For our purposes, k starts at 0, thus the minimum element is the 0-th order statistic and the largest element is the $n - 1$ -th order statistic.

Another way to view it is: suppose we were to *sort* the array, then the k -th order statistic would be the element at index k in the sorted array. Write a function to find the k -th order statistic.

Exercise 7.29. Write a function that takes two $n \times n$ square matrices A, B and returns a new $n \times n$ matrix C which is the product, $A \times B$. The product of two matrices of dimension $n \times n$ is defined as follows:

$$c_{ij} = \sum_{k=1}^n a_{ik} b_{kj}$$

Where $1 \leq i, j \leq n$ and c_{ij} is the (i, j) -th entry of the matrix C .

Exercise 7.30. We can multiply a matrix by a single scalar value x by simply multiplying each entry in the matrix by x . Write a function that takes a matrix of numbers and an element x and performs scalar multiplication.

Exercise 7.31. Write a function that takes two matrices and determines if they are equal (all of their elements are the same).

Exercise 7.32. Write a function that takes a matrix and an index i and returns a new *array* that contains the elements in the i -th row of the matrix.

Exercise 7.33. Write a function that takes a matrix and an index j and returns a new *array* that contains the elements in the j -th column of the matrix.

Exercise 7.34. Iterated Matrix Multiplication is where you take a square matrix, A and multiply it by itself k times,

$$A^k = \underbrace{A \times A \times \cdots \times A}_{k \text{ times}}$$

Write a function to compute the k -th power of a matrix A .

Exercise 7.35. The *transpose* of a square matrix is an operation that “flips” the matrix along the diagonal from the upper left to the lower right. In particular the values $m_{i,j}$ and $m_{j,i}$ are swapped. Write a function to transpose a given matrix

Exercise 7.36. Write a function that takes a matrix, a row index i , and a number x and adds x to each value in the i -th row.

Exercise 7.37. Write a function that takes a matrix, a row index i , and a number x and multiplies each value in the i -th row with x .

Exercise 7.38. Write a function that takes a matrix, and two row indices i, j and *swaps* each value in row i with the value in row j

Exercise 7.39. A special matrix that is often used is the *identity* matrix. The identity matrix is an $n \times n$ matrix with 1s on its diagonal and zeros everywhere else. Write a function that, given n , creates a new $n \times n$ identity matrix.

Exercise 7.40. Write a function to convert a matrix of integers to floating point numbers.

Exercise 7.41. Write a function to determine if a given matrix is a *permutation matrix*. A permutation matrix is a matrix that represents a permutation of the rows of an identity matrix. That is, A is a permutation matrix if every row and every column has exactly one 1 and the rest are zeros.

Exercise 7.42. Write a function to determine if a given square matrix is *symmetric*. A matrix is symmetric if $m_{i,j} = m_{j,i}$ for all i, j .

Exercise 7.43. Write a function to compute the *trace* of a matrix. The trace of a matrix is the sum of its elements along its diagonal.

Exercise 7.44. Write a function that returns a “resized” copy of a matrix. The function takes a matrix of size $n \times m$ (not necessarily square) and creates a copy that is $p \times q$ (p, q are part of the input to the function). If $p < n$ and/or $q < m$, the values are “cut off”. If $p > n$ and/or $q > m$, the matrix is padded (to the right and to the bottom) with zeros.

Exercise 7.45. A *submatrix* is a matrix formed by selecting certain rows and columns from a larger matrix. Write a function that constructs a submatrix from a larger matrix. To do so, the function will take a matrix as well as two row indices i, j and two column indices k, ℓ and it will return a new matrix which consists of entries from the i -th row through the j -th row and k -th column through the ℓ -th column.

For example, if A is

$$\mathbf{A} = \begin{bmatrix} 8 & 2 & 4 & 1 \\ 10 & 4 & 2 & 3 \\ 12 & 42 & 1 & 0 \end{bmatrix}.$$

then a call to this function with $i = 1, j = 2, k = 2, \ell = 3$ should result in

$$\mathbf{A} = \begin{bmatrix} 2 & 3 \\ 1 & 0 \end{bmatrix}.$$

Exercise 7.46. The *Kronecker product* (http://en.wikipedia.org/wiki/Kronecker_product) is a matrix operation on two matrices that produces a larger block matrix. Specifically, if A is an $m \times n$ matrix and B is a $p \times q$ matrix, then the Kronecker product $A \otimes B$ is the $mp \times nq$ block matrix:

$$\mathbf{A} \otimes \mathbf{B} = \begin{bmatrix} a_{11}\mathbf{B} & \cdots & a_{1n}\mathbf{B} \\ \vdots & \ddots & \vdots \\ a_{m1}\mathbf{B} & \cdots & a_{mn}\mathbf{B} \end{bmatrix}$$

more explicitly:

$$\mathbf{A} \otimes \mathbf{B} = \begin{bmatrix} a_{11}b_{11} & a_{11}b_{12} & \cdots & a_{11}b_{1q} & \cdots & \cdots & a_{1n}b_{11} & a_{1n}b_{12} & \cdots & a_{1n}b_{1q} \\ a_{11}b_{21} & a_{11}b_{22} & \cdots & a_{11}b_{2q} & \cdots & \cdots & a_{1n}b_{21} & a_{1n}b_{22} & \cdots & a_{1n}b_{2q} \\ \vdots & \vdots & \ddots & \vdots & & & \vdots & \vdots & \ddots & \vdots \\ a_{11}b_{p1} & a_{11}b_{p2} & \cdots & a_{11}b_{pq} & \cdots & \cdots & a_{1n}b_{p1} & a_{1n}b_{p2} & \cdots & a_{1n}b_{pq} \\ \vdots & \vdots & & \vdots & \ddots & & \vdots & \vdots & & \vdots \\ \vdots & \vdots & & \vdots & & \ddots & \vdots & \vdots & & \vdots \\ a_{m1}b_{11} & a_{m1}b_{12} & \cdots & a_{m1}b_{1q} & \cdots & \cdots & a_{mn}b_{11} & a_{mn}b_{12} & \cdots & a_{mn}b_{1q} \\ a_{m1}b_{21} & a_{m1}b_{22} & \cdots & a_{m1}b_{2q} & \cdots & \cdots & a_{mn}b_{21} & a_{mn}b_{22} & \cdots & a_{mn}b_{2q} \\ \vdots & \vdots & \ddots & \vdots & & & \vdots & \vdots & \ddots & \vdots \\ a_{m1}b_{p1} & a_{m1}b_{p2} & \cdots & a_{m1}b_{pq} & \cdots & \cdots & a_{mn}b_{p1} & a_{mn}b_{p2} & \cdots & a_{mn}b_{pq} \end{bmatrix}.$$

Write a function that computes the Kronecker product.

Exercise 7.47. The Hadamard product is an entry-wise product of two matrices of equal size. Let \mathbf{A}, \mathbf{B} be two $n \times m$ matrices, then the Hadamard product is defined as follows.

$$\mathbf{A} \circ \mathbf{B} = \begin{pmatrix} a_{11} & a_{12} & \cdots & a_{1m} \\ a_{21} & a_{22} & \cdots & a_{2m} \\ \vdots & \vdots & \ddots & \vdots \\ a_{n1} & a_{n2} & \cdots & a_{nm} \end{pmatrix} \circ \begin{pmatrix} b_{11} & b_{12} & \cdots & b_{1m} \\ b_{21} & b_{22} & \cdots & b_{2m} \\ \vdots & \vdots & \ddots & \vdots \\ b_{n1} & b_{n2} & \cdots & b_{nm} \end{pmatrix} = \begin{pmatrix} a_{11}b_{11} & a_{12}b_{12} & \cdots & a_{1m}b_{1m} \\ a_{21}b_{21} & a_{22}b_{22} & \cdots & a_{2m}b_{2m} \\ \vdots & \vdots & \ddots & \vdots \\ a_{n1}b_{n1} & a_{n2}b_{n2} & \cdots & a_{nm}b_{nm} \end{pmatrix}$$

Write a function to compute the Hadamard product of two $n \times m$ matrices.

8. Strings

A *string* is an ordered sequence of characters. We’ve previously seen string data types as literals. Most languages allow you to define and use static string literals using the double-quote syntax. We used strings to specify output formatting using `printf()`-style functions for example. When reading input from a user, we read it as a string and converted the input to numbers. We also described some basic operations on strings including concatenation. We now examine strings in more depth.

Programming languages vary greatly in how they represent string data types. Some languages have string types built-in to the language and others require that you use arrays and yet others treat strings as a special type of object.

One issue with string representations is determining where and how the string ends. Some languages use a *length prefix* string representation. The length (that is, the number characters in the string) is stored in a special location at the beginning of a string. Then the string characters are stored as an array. Still other languages use a special character, the *null-terminating character* to denote the end of a string. Still other languages store strings as arrays or dynamic arrays and the “bookkeeping” is done internally as part of an object representation.

Other details vary as well. Most languages support the basic ASCII characters, others have full Unicode support or support Unicode through a library. Most languages also provide large libraries of functions and operations that make working with strings easier.

8.1. Basic Operations

Depending on how a language supports strings, it may support various basic operations to create strings and assign them to variables. Usually languages allow you to create and use string literals using the double quote syntax. Modifying a string or copying one string into another may be supported by the built-in assignment operator or it may require the use of a *copy* function. When copying strings, similar issues come into play as with arrays. The “copy” could be a shallow copy or a deep copy (see Section 7.2.2).

Other basic operations may include accessing and/or modifying individual characters in a string. In order to do so, we may also need to know a string’s length (so that we do not access invalid characters). A language could provide this as part of the string itself (usually called a *property* of the string) or again through a function call. We can

8. Strings

further use such functionality to iterate over the individual characters in a string using an index-controlled for-loop.

More advanced operations on strings include [concatenation](#) which is the operation of combining one or more strings to create a new string. Concatenation simply *appends* one string to the end of another string. Again, depending on the language this may be accomplished with a built-in operator or it may require a function call.

Another common operation is to extract a *substring* from a string, that is create a new string from a portion of another string. Commonly, this is done via some standard function that may operate by specifying indices and/or the length of the desired substring.

Finally, it is also common to deal with collections of strings. Some languages allow you to create arrays of strings or dynamic collections (lists or sets) of strings. for languages in which strings are arrays of characters, an array of strings might be implemented with a 2-dimensional array of characters.

8.2. Comparisons

When processing strings there are several other standard operations. In particular, we often have need to make comparisons between two string variables or between a string variable and a literal. Some languages allow you to use the same operators such as `==` or even `<` to make comparisons between strings. The implied behavior would compare strings for equality (case sensitive) or for [lexicographic](#) order. For example “Apple” `<` “Banana” might evaluate to *true* because “Apple” precedes “Banana” in alphabetic order.

Many languages, however, require that you make string comparisons using a function. Using the equality operator `==` may be correct syntactically, but is usually making a pointer or reference comparison which evaluates to true if and only if the two variables represent the same thing in memory. Even if two string variables have the same *content*, the equality operator may evaluate to *false* if they are distinct (deep) copies of the same string. Likewise, the inequality operators `<`, `≤`, etc. may only be comparing memory addresses which is meaningless for comparing strings.

The solution that many languages provide is the use of a [comparator](#), which is either a function or an object that facilitates the comparison of strings (and more generally, any object). Generally, a comparator function takes two arguments, *a*, *b* and compares them, not just for equality, but for their relative order: does *a* “come before” *b* or does *b* “come before” *a*, or are they equal. To distinguish between these three cases, a comparator returns an integer value with the following general contract: it returns

- Something negative if $a < b$
- Zero if $a = b$
- Something positive if $a > b$

Using this contract we can determine the relative ordering of any two strings. In general we cannot make any assumptions about the actual value that a comparator returns, only that it returns *something* negative or positive. The actual magnitude of the returned value need not be -1 or $+1$, and it may not even have any predefined meaning.

8.3. Tokenizing

It is common to store different pieces of data as a string such that each individual piece of data is demarcated by some *delimiter*. For example, [Comma Separated Values \(CSV\)](#) or [Tab Separated Values \(TSV\)](#) data use commas and tabs to delimit data. For example, the string

```
Smith,Joe,12345678,1985-09-08
```

is a CSV string holding data on a particular person (last name, first name, ID, date of birth). Often we need to process such strings to extract each individual piece of data.

Processing such strings is usually referred to as [parsing](#). In particular, a string is “split” into a collection of individual strings called [tokens](#) (thus the process is also sometimes referred to as tokenizing). In the example above, the string would be processed into 4 individual strings, `Smith`, `Joe`, `12345678`, and `1985-09-08`. Each string could further be tokenized if needed, such as parsing the date of birth to extract the year, month, and date.

Most languages provide a function to facilitate tokenizing. Some do so by directly returning an array or collection of the resulting tokens (usually with the delimiter removed). Others have a more manual process that requires a loop structure to iterate over each token.

8.4. Exercises

Exercise 8.1. Write functions to reverse a string. If appropriate, write versions to do so by manipulating a given string and returning a new string that is a reversed copy.

Exercise 8.2. Write a function to replace all spaces in a string with *two* spaces.

Exercise 8.3. Write a program to take a phrase (International Business Machines) and “acronymize” it by producing a string that is an upper-cased string of the first letter of each word in the phrase (IBM).

Exercise 8.4. Write a function that takes a string containing a word and returns a *pluralized* version according to the following rules.

1. If the noun ends in “y,” remove the “y” and add “ies”

8. Strings

2. If the noun ends in “s,” “ch,” or “sh,” add “es”
3. In all other cases, just add “s”

Exercise 8.5. Write a function that takes a string and determines if it is a *palindrome* or not. A *palindrome* is a word that is spelled exactly the same when the letters are reversed.

Exercise 8.6. Write a function to compute the *longest common prefix* of two strings. For example, the longest common prefix of “global” and “glossary” is “glo”. If two strings have no common prefix, then the longest common prefix is the empty string.

Exercise 8.7. Write a function to remove any whitespace from a given string. For example, if the string passed to the function contains `"Hello World How are you? "` then it should result in the string `"HelloWorldHowareyou?"`

Exercise 8.8. Write a function that takes a string and flips the case of each alphabetic character in it. For example, if the input string is `"GNU Image Processing Tool-Kit"` then it should output `"gnu iMAGE pROCESSING tOOL-kIT"`

Exercise 8.9. Write a function to validate a variable name according to the rules that it must begin with an alphabetic character, a–z or A–Z but may contain any alphanumeric character a–z, A–Z, 0–9, or underscores `_`. Your function should take a string with a possible variable name and return true or false depending on whether or not it is valid.

Exercise 8.10. Write a function to convert a string that represents a variable name using `under_score_casing` to `lowerCamelCasing`. That is, it should remove all underscores, and replace the first letter of each word with an uppercase (except the first word).

Exercise 8.11. Write a function that takes a string and another character *c* and counts the number of times that *c* appears in the string.

Exercise 8.12. Write a function that takes a string and another character *c* and removes all instances of *c* from the string. For example, a call to this function on the string `"Hello World"` with *c* being equal to `'o'` would result in the string `"Hell Wrld"`.

Exercise 8.13. Write a function that takes a string and two characters, *c* and *d* and replaces all instances of *c* with *d*.

Exercise 8.14. Write a function to determine if a given string *s* contains a substring *t*. The function should return true if *t* appears anywhere inside *s* and false otherwise.

Exercise 8.15. Write a function that takes a string *s* and returns a new string that contains the first character of each word in *s* capitalized. You may assume that words are separated by a single space. For example, if we call this function with the string `"International Business Machines"` it should return `"IBM"`. If we call it with the string `"Flint Lockwood Diatonic Super Mutating Dynamic Food Replicator"` it should return `"FLDSMDFR"`

Exercise 8.16. Write a function that *trims* leading and trailing white space from a string. Inner whitespace should not be modified.

Exercise 8.17. Write a function that splits a string containing a unix path/file into its three components: the directory path, the file base name and the file extension. For example, if the input string is `/usr/home/message.txt` then the three components would be `/usr/home/`, `message` and `txt` respectively. For the purposes of this function, you may assume that the path ends with the *last* forward slash (or is empty if none) and that the extension is always after the *last* period. That is, you should be able to handle inputs such as `../foo/bar/baz.old.txt`.

Exercise 8.18. Write a function that (re)formats a string representing a telephone number. Phone numbers can be written using a variety of formats, for example `1-402-555-1234` or `+4025551234` or `402 555-1234`, etc. Assume that you will only deal with 10 digit US phone numbers. Create a new string that uses the “standard” format of `(402) 555-1234`.

Exercise 8.19. Write a function that takes a string and splits it up to an *array* of strings. The split will be length-based: the function will also take an integer n and will split the given string up into strings of length n . It is possible that the last string will not be of length n .

For example, if we pass `"Hello World, how are you?"` with $n = 3$ then it should return an array of size 9 containing the strings `"Hel"`, `"lo "`, `"Wor"`, `"ld,"`, `" ho"`, `"w a"`, `"re "`, `"you"`, `"?"`

Exercise 8.20. **HyperText Markup Language (HTML)** (Hypertext Markup Language) is the primary document description language for the **World Wide Web (WWW)**. Certain characters are not rendered in browsers as they are special characters used in **HTML**; in particular tags which begin and end with the `<` and `>`.

To display such characters correctly they need to be *escaped* (similar to how you need to escape tabs `\t` and newline `\n` characters). Properly escaping these characters is not only important for proper rendering, but there are also security issues involved (Cross-Site Scripting Attacks).

Write a function that takes a string and *escapes* the HTML characters in Table 8.1.

Replace the following	with this
<code>&</code>	<code>&amp;</code>
<code><</code>	<code>&lt;</code>
<code>></code>	<code>&gt;</code>
<code>"</code>	<code>&quot;</code>

Table 8.1.: Replacement HTML Characters

9. File Input/Output

A [file](#) is a block of data used for storing information. Normally, we think of a file as something that is stored on a hard drive (or memory stick or other disk media), but the concept of a file is much more general. For example, when a file is loaded (“read”) by a program it then exists in main memory. An executable program itself is a file (containing instructions to be executed), both stored on the hard drive and run in memory.

In a typical unix-based system, *everything* is a file. Directories are files, executables are files, running processes are files, etc. Even the familiar standard input and standard output are buffers that are treated as files that can be read from or written to.

Files may be stored as binary data or as plaintext files. Granted, plaintext files are still stored as binary data, but are stored as an encoding using the [ASCII](#) text values. Binary files will also have structure, but it depends on the application that produced the file to give meaning to the data. For example, an image file in a [Joint Photographic Experts Group \(JPEG\)](#) format is essentially just binary data but it has a very specific format that an image viewer would be able to process, but, say, a text editor would not. Further, if the binary format is corrupted, even the image viewer might not be able to display the image correctly

Files provide [persistence](#) of data. Typical programs are short lived, anywhere from a few milliseconds to maybe a user “session.” However, we often want data to be saved across multiple runs we need to save it or *persist* it in some durable storage medium (disk).

9.1. Processing Files

In general, processing data in a file involves three basic steps:

1. Open (or create) the file
2. Read from (or write to) the file
3. Close the file

Depending on the language, the act of opening a file may determine if it will be read from or written to. When read from, the file is referred to as an *input file* while a file that is written to is an *output file*. Languages may also have different a different [API](#) or functions to read/write a file.

9. File Input/Output

A file may be processed line by line until the end of the end of the file has been reached. Languages usually support this by a special **End Of File (EOF)** flag or value to indicate the end of a file has been reached.

We need to properly manage a resource like a file just as we would with, say, memory and properly close it once we are finished processing it. Depending on the language and other factors such as the operating system, failure to close a file may result in corrupted data. Though a file may be closed automatically for us when the program terminates, its still best practice to properly close it.

9.1.1. Paths

When opening a file on a file system, it is necessary to specify *which* file you want to open. This is typically done by specifying at least the name of the file. Often files will have “extensions” which indicate the type of file it is such as `.txt` for text files or `.html` for **HTML** files. However, in general file extensions are only for organizational purposes and have no real bearing on what data is stored in the file.

More important is the *path* of the file. Usually, if no path is specified, then implicitly we are opening the file in the **Current Working Directory (CWD)**. For example, if we open the file `data.txt` then we are opening the file in the same directory in which our program is executing.

When specifying a path we can either specify an *absolute* path or a *relative* path. An absolute path specifies each and every subdirectory in the file system from the *root* to the directory that the file is located in. The root directory is the top-most directory in the file system. Each subdirectory is separated by some *delimiter*.

Windows systems usually use a backslash as a directory delimiter while the root directory is specified using a “volume” name such as `C:\`. For example, an absolute path on a Windows system may look something like:

```
C:\applications\users\data\data.txt
```

On a Unix-based system, a forward slash is used as a directory delimiter and the root directory is simply a single forward slash. The same directory structure in a Unix-based system would look like the following.

```
/applications/users/data/data.txt
```

A path may also be relative to the current working directory. In most systems (Windows and Unix-based) the current directory is denoted using a single period, `.`. You can use this to specify directories deeper in the directory tree from the current directory. For example (in Unix),

```
./app/data/data.txt
```


would refer to the directory `app` in the current working directory, the directory `data` within that, and finally the file `data.txt` within that directory.

We can also refer to files further up the directory tree using the “parent” directory symbol which is two periods, `..`. For example,

```
../../system/data.txt
```

would refer to a file two levels up in the subdirectory `system`.

TODO: diagram?

9.1.2. Error Handling

When dealing with files there are many potential error conditions that may be anticipated and may need to be dealt with. Some types of errors that can occur include:

- Permission errors – Your program does not have the proper permissions to read or write to a particular directory or file. For example, user-level processes typically do not have permissions to read system-level files (such as password files) nor can they write to them lest they corrupt critical system data.
- File Not Found errors – Your program may attempt to open a file that does not exist. Sometimes, particularly when writing, the file will be created if it does not exist. However, for reading, this may be a more serious error.
- I/O Errors – We may be able to successfully find and open a file, but during processing something might go wrong with the file system that results in a general input/output error.
- Formatting errors – As previously mentioned, the format of a file is highly dependent on the application that created it (though there are universal data formats such as [XML](#) or [JavaScript Object Notation \(JSON\)](#)). If the format is not as expected the file may be corrupted and the program may not be able to successfully read data from it.

Depending on the language, these errors may be fatal or may result in error codes or error values that can be dealt with. Or they may result in exceptions that can be caught and handled.

9.1.3. Buffered and Unbuffered

When processing files the input/output may be either *buffered* or *unbuffered*. A buffered input or output “stream” is one in which data that is read/written is actually stored in memory in a “buffer” until such a time as the buffer is “flushed” and the accumulated data is passed to/from the actual file.

9. File Input/Output

For example, in a buffered output file, our program could write several kilobytes of data to the output file, but it might not actually be written to the file right away. Instead, those kilobytes of data are stored in memory until the buffer fills up or some other event takes place to cause the buffer to be flushed. At that point, the data stored in the buffer is emptied and written to the file.

Buffered input/output is used because, in general, I/O operations are expensive in terms of system resources and can slow the system down. Because of this, it is better to keep I/O operations as infrequent as possible. Buffers help to reduce the number of I/O operations performed by a program.

There are some instances in which we want unbuffered I/O. When error messages are written to the standard error output for example, we would prefer to know about errors as soon as possible rather than waiting for error messages to accumulate in a buffer. Using an unbuffered output means that data is written to the standard error (which *is* a file) immediately. However, because errors are (hopefully) infrequent and (likely) fatal, this is not a general performance issue.

9.1.4. Binary vs Text Files

As previously mentioned, files can be stored as pure binary data or as plaintext ([ASCII](#)). Depending on our application and the nature of the data being written to files, the choice of which to use may be clear. If we want the data in our files to be human-readable, then we need to store them as plaintext.

However, in general, we should prefer storing data in a binary format. The reason for this is that binary generally requires less space and is more efficient to process.

Consider as an example, storing a collection of integers in a file. Each integer requires 4 bytes when represented in binary. However, when represented as a string, it requires as many bytes as there are digits in the number. For example, the maximum representable value of such an integer would be $2^{31} - 1 = 2,147,483,647$, requiring 10 ASCII characters and thus 10 bytes to represent, two and a half times as much memory as with the binary representation. Further, if a lot of numbers are stored, each number (as a string) would need to be delimited by yet another character. With a binary representation, no delimiter would be necessary as we would know that each 4 byte block represents a single number.

This disparity can even more stark with other types such as floating-point numbers. There are additional performance issues when reading/writing the data and converting binary numbers to their string representations. With binary data no such parsing is necessary. As long as the data does not need to be human-readable, binary formats should be used.

9.2. Exercises

Exercise 9.1. Write a function that takes a string representing a file name and opens and processes the file, returning all of its contents as a single string.

Exercise 9.2. Consider an irregular, 2-D simple polygon with n points, $(x_1, y_1), (x_2, y_2), \dots, (x_n, y_n)$. The area A of the polygon can be computed as

$$A = \frac{1}{2} \sum_{i=0}^{n-1} (x_i y_{i+1} - x_{i+1} y_i)$$

Note, that the initial and end point will be the same, $(x_0, y_0) = (x_n, y_n)$. An example polygon for $n = 5$ can be found in Figure 9.1.

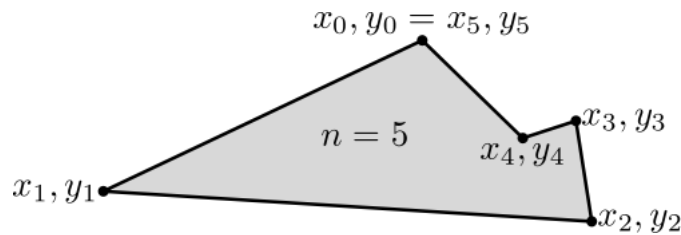


Figure 9.1.: An example polygon for $n = 5$

Write a program to open and process a text file containing n coordinates. In particular, the first line is a single integer n that indicates how many points should be read in. Each line after that has the x, y coordinates of each point separated by a single space.

```
4
1.0 0.0
13.2 1.25
20.5 18.4
16.37 24.54
```

After reading the file in, it will compute the area of the polygon according to the formula above and output it to the user. For example, the output for the above file may be something like **Area of the polygon: 197.9135**

Exercise 9.3. Write a program that processes an input text file and scrubs it of any HTML characters that need to be escaped (see Exercise 8.20 for details). It should produce a new output file with all special characters escaped.

Exercise 9.4. Write a program that spell checks a plain text file. The program will open a text file and process each word separately, checking for proper spelling against a standard dictionary.

You may assume that each word is separated by some whitespace (you may assume that there are no multi-line hyphenated words). However, you should ignore all punctuation (periods, question marks, etc.).

9. File Input/Output

Use a standard American dictionary provided on your unix system which stores words one per line. Your output should include all misspelled or unrecognized words (words not contained in the dictionary file).

Exercise 9.5. A standard word search consists of an $n \times n$ grid in which there are a number of words hidden, some intersecting, with dummy letters filling in the blanks. An example is provided in Figure 9.2.



Figure 9.2.: A Word Search

Write a program to solve a word search. Your program will read in an input file with the following format: the first line will contain a single integer n which is followed by n lines with n characters (not including the end line character) corresponding to the word search.

Once you read in the word search, you will iterate through all possible words running down, right, or diagonally down-right. You will attempt to match each possibility against a standard English dictionary. If the word matches a word in the dictionary, output it to the standard output, otherwise ignore it. To simplify, you may restrict your attention to words that have a length between 3 and 8 (inclusive).

Exercise 9.6. Write a crossword puzzle cheater. The program will take, as input, a “partial” word in a crossword puzzle. That is, some of the letters are known (from other solved clues) while some of the letters are not known. For the purposes of this exercise, we’ll use a hyphen as a placeholder for missing letters.

Your program will match the partial word against words in a standard English dictionary and list all possible matches. For example, if the user provided `foo-` as input it might match `food`, `fool`, and `foot`.

Exercise 9.7. Bridge is a four player (2 team) game played with a standard 52-card deck. Prior to play, a round of bidding is performed to determine which team is playing

for or against the contract, the trump suit, and at what level. Understanding the rules of the game or the bidding conventions involved are not necessary for this exercise. Instead, write a program to assist players in how they should bid based on the following point system.

A standard 52-card deck is dealt evenly to 4 different hands (Players 1 thru 4, 13 cards each). Each player's hand is worth a number of points based on the following rules:

- Each Ace in the hand is worth 4 points
- Each King is worth 3
- Each Queen is worth 2
- Each Jack is worth 1
- For each suit (Diamond, Spade, Club, Heart) such that the hand has only 2 cards (a “doubleton”) an additional point is added
- For each suit that the hand has only 1 card in (a “singleton”) two additional points are added
- For each suit that the hand has no cards (a “void”) 3 additional points are added.

Write a program that reads in a text file containing a deal. The formatting is as follows: the input file will have 4 lines, one for each player. Each line contains the cards dealt to that player delimited by a single space. The cards are indicated by the rank ($A, K, Q, J, 10, 9, \dots, 2$) and the suit (D, S, C, H). An example:

```
3C 3D 7S QD KC AS 6S AC JS 4S JD 7H 6D
5D 8C 7D AH 3H QC 8D JH 5H 9D 7C 9C 4D
2H 10D 8H KS QH 4C 10S 9S 6H 8S KD AD QS
2D 10C 6C 2C 10H 4H 2S 3S 5C 9H KH JC 5S
```

Your program should process the file and output the total number of points each hand represents. You should not make any assumptions about the ordering of the input.

```
Hand 1 Points: 17
Hand 2 Points: 10
Hand 3 Points: 16
Hand 4 Points: 6
```

Exercise 9.8. The game of Sudoku is played on a 9×9 grid in which entries consist of the numbers 1 thru 9. Initially, the board is presented with some values filled in and others blank. The player has to fill in the remaining values until all grid boxes are filled and the following constraints are satisfied.

- In each of the 9 rows, each number, 1–9 must appear exactly once
- In each of the 9 columns, each number 1–9 must appear exactly once
- In each of the 3×3 sub-grids, each number 1–9 must appear exactly once

9. File Input/Output

A full example is presented in Figure 9.3.

8	3	5	4	1	6	9	2	7
2	9	6	8	5	7	4	3	1
4	1	7	2	9	3	6	5	8
5	6	9	1	3	4	7	8	2
1	2	3	6	7	8	5	4	9
7	4	8	5	2	9	1	6	3
6	5	2	7	8	1	3	9	4
9	8	1	3	4	5	2	7	6
3	7	4	9	6	2	8	1	5

Figure 9.3.: A solved Sudoku puzzle

Write a program that processes a text file containing a possible sudoku solution and determine if it is a *valid* or *invalid* solution. The file will have the following format: it will contain 9 lines with 9 numbers on each line delimited by a single space. If the input represents a valid solution, output "Valid Solution", otherwise output at least one reason why the input is not a valid solution.

Exercise 9.9. Write a program that parses and processes a data file containing Comma Separated Values (CSV) and produce an equivalent JSON (JavaScript Object Notation) output file containing the same data.

The input file will have the following format. The first line is a CSV list of column names. Each subsequent line is an individual record with values for each column. The number of columns and rows may vary from file to file. The following is an example containing data about students, which has four columns and 3 records.

```
lastName,firstName,NUID,GPA
Castro,Starlin,11223344,3.48
Rizzo,Anthony,55667788,3.95
Bryant,Chris,01234567,2.7
```

The output file will be formatted in JSON where each "object" (record) is denoted with opening and closing curly brackets, each record is separated by a comma, and all records are enclosed in square brackets (putting them in an array). For each record, each value is denoted with a key (the column name) and a value. For this exercise, treat all values as strings even if they are numbers. For example, the input file above would be formatted as follows.

```

1  [
2    {
3      "lastName": "Castro",
4      "firstName": "Starlin",
5      "NUID": "11223344",
6      "GPA": "3.48"
7    },
8    {
9      "lastName": "Rizzo",
10     "firstName": "Anthony",
11     "NUID": "55667788",
12     "GPA": "3.95"
13   },
14   {
15     "lastName": "Bryant",
16     "firstName": "Chris",
17     "NUID": "01234567",
18     "GPA": "2.7"
19   }
20 ]

```

Exercise 9.10. TODO: move this to sorting?

Data has a “natural” ordering: numbers are ordered in nondecreasing order, strings are ordered lexicographically (according to the ASCII text table). However, in many situations, the natural ordering isn’t the *expected* ordering. For example, class years are usually ordered Freshman, Sophomore, Junior, Senior whereas the natural ordering would order them Freshman, Junior, Senior, Sophomore.

Write a program to sort a collection of strings according to an arbitrary artificial ordering. That is, instead of the A–Z alphabetic ordering, we will order them according to an alternative ordering of the English alphabet. As an example, one possible ordering would be:

```
n e d c r h a l g k m z f w j o b v x q y i p u s t
```

Your job will be to *sort* a list of English language words using this artificial ordering of the English alphabet. Specifically, you will read in an input file in the following format. The first line is the new ordering of English letters, each separated by a space. Each line after that contains a single string. You will read in this file, process it and produce a reordered list of the words sorted according to the new ordering.

An example input:

9. File Input/Output

```
n e d c r h a l g k m z f w j o b v x q y i p u s t
vcawufotrb
laencfuesw
gvtkwekfom
vrsfqictqc
wmcvmjmtet
qetegyqelu
newaxdtjlt
nfrfrwkknj
fzqrvgblov
gkkmgwwpa
```

The result ordering:

```
Artificial Ordering:
newaxdtjlt
nfrfrwkknj
laencfuesw
gkkmgwwpa
gvtkwekfom
fzqrvgblov
wmcvmjmtet
vcawufotrb
vrsfqictqc
qetegyqelu
```

For simplicity, you can assume that all words will be lower case and no non-alphabetic characters are used. However, you may not assume that all words will be the same length. Words of a shorter length that are a prefix of another word should be ordered first. For example, “newax” should come before “newaxn” in the ordering above.

Exercise 9.11. Ranked voting elections are elections where each voter *rank*s each candidate rather than just voting for a single candidate. If there are n candidates, then each voter will rank them 1 (best) through n (worst). Usually, the winner of such an election is determined by a *Condorcet* method (the candidate that would win in by a majority in all head-to-head contests). However, we’ll use an alternative method, a *Borda count*.

In a Borda count, points are awarded to each candidate for each ballot. For every number 1 ranking, a candidate receives n points, for every 2 ranking, a candidate gets $n - 1$ points, and so on. For a rank of n , the candidate only receives 1 point. The candidates are then ordered by their total points and the one with the highest point count wins the election. Such a system usually leads to a “consensus” candidate rather than one preferred by a majority.

Implement a Borda-count based ranked voting program. Your program will read in a file in the following format. The first line will contain an ordered list of candidates delimited

by commas. Each line after that will represent a single ballot's ranking of the candidates and will contain comma delimited integers 1 through n . The order of the rankings will correspond to the order of the candidates on the first line.

Your program will take an input file name as a command line argument, open the file and process it. It will then report the results including the point total for each candidate (in order) as well as the overall winner. It will also report the total number of ballots. You may assume each ballot is valid and all rankings are provided.

An example input:

```
Alice,Bob,Charlie,Deb
2,1,4,3
3,4,2,1
4,2,3,1
3,2,1,4
3,1,4,2
```

An example output:

```
Election Results
Number of ballots: 5

Candidate  Points
Bob        15
Deb        14
Charlie    11
Alice      10

Winner is Bob
```

Exercise 9.12. A DNA sequence is a sequence of some combination of the characters **A** (adenine), **C** (cytosine), **G** (guanine), and **T** (thymine) which correspond to the four nucleobases that make up DNA. Given a long DNA sequence, it's often useful to compute the frequency of n -grams. An n -gram is a DNA subsequence of length n . Since there are four bases, there are 4^n possible n -grams.

Write a program that processes a DNA sequence from a plaintext file and, given n , computes the relative frequency of each n -gram as it appears in the sequence. As an example, consider the sequence in Figure 9.4.

GGAAGTAGCAGGCCGCATGCTTGGAGGTAAAGTTCATGGTTCCTGGCCC

Figure 9.4.: A DNA Sequence

To compute the frequency of all $n = 2$ n -grams, we would consider all 16 combinations of length-two DNA sequences. We would then go through the sequence and count up the number of times each 2-gram appears. We then compute the relative frequency (note:

9. File Input/Output

if a sequence is length L , then the total number of n -grams in it is $L - (n - 1)$. The relative frequency of each such 2-gram is calculated below.

AA	6.1224%
AC	0.0000%
AG	10.2041%
AT	4.0816%
CA	6.1224%
CC	10.2041%
CG	2.0408%
CT	4.0816%
GA	4.0816%
GC	10.2041%
GG	12.2449%
GT	8.1633%
TA	4.0816%
TC	4.0816%
TG	8.1633%
TT	6.1224%

Exercise 9.13. Given a long DNA sequence, it is often useful to compute the number of instances of a certain *subsequence*. As an example, if we were to search for the subsequence *GTA* in the DNA sequence in Figure 9.4, it appears twice. As another example, in the sequence `CCCC`, the subsequence `CC` appears three times.

Write a program that processes a text file containing a DNA sequence and, given a subsequence s , searches the DNA sequence and counts the number of times s appears.

Exercise 9.14. Protein sequencing in an organism consists of a two step process. First the DNA is translated into RNA by replacing each thymine (T) nucleotide with uracil (U). Then, the RNA sequence is translated into a protein according to the following rules. The RNA sequence is processed 3 bases at a time. Each *trigram* is translated into a single amino acid according to known encoding rules. There are 20 such amino acids, each represented by a single letter in (*A, C, D, E, F, G, H, I, K, L, M, N, P, Q, R, S, T, V, W, Y*).

The rules for translating trigrams are presented in Figure 9.5. Each triple defines a protein, but we're only interested in the first letter of each protein. Moreover, the trigrams UAA, UAG, and UGA are special markers that indicate a (premature) end to the protein sequencing (there may be additional nucleotides left in the RNA sequence, but they are ignored and the translation ends).

As an example, suppose we start with the DNA sequence *AAATTCCGCGTACCC*; it would be encoded into RNA as *AAAUUCCGCGUACCC*; and into an amino acid sequence *KFRVP*.

Write a program that processes a file containing a DNA sequence and outputs the translated proteins (only the first letter of each protein) to an output file.

		second base in codon					
		U	C	A	G		
first base in codon	U	UUU Phe	UCU Ser	UAU Tyr	UGU Cys	third base in codon	U
		UUC Phe	UCC Ser	UAC Tyr	UGC Cys		C
		UUA Leu	UCA Ser	UAA stop	UGA stop		A
		UUG Leu	UCG Ser	UAG stop	UGG Trp		G
	C	CUU Leu	CCU Pro	CAU His	CGU Arg		U
		CUC Leu	CCC Pro	CAC His	CGC Arg		C
		CUA Leu	CCA Pro	CAA Gln	CGA Arg		A
		CUG Leu	CCG Pro	CAG Gln	CGG Arg		G
	A	AUU Ile	ACU Thr	AAU Asn	AGU Ser		U
		AUC Ile	ACC Thr	AAC Asn	AGC Ser		C
		AUA Ile	ACA Thr	AAA Lys	AGA Arg		A
		AUG Met	ACG Thr	AAG Lys	AGG Arg		G
	G	GUU Val	GCU Ala	GAU Asp	GGU Gly		U
		GUC Val	GCC Ala	GAC Asp	GGC Gly		C
		GUA Val	GCA Ala	GAA Glu	GGA Gly		A
		GUG Val	GCG Ala	GAG Glu	GGG Gly		G

Figure 9.5.: Codon Table for RNA to Protein Translation

Exercise 9.15. Recently, researchers have successfully inserted two new artificial nucleases into simple bacteria that successfully reproduced the artificial bases through several generations. The artificial bases d5SICS and dNaM, (X and Y for short) mimic the natural G , and C nucleobases respectively.

Write a program that takes a normal DNA sequence and replace some of its G, C pairs with X, Y respectively. DNA is translated into RNA which is then translated into 20 different amino acids. Each amino acid produced depends on a 3 nucleobase *codon*. For this exercise, we will change G, C pairs with X, Y pairs but only in codons that represent the amino acids Threonine (an essential amino acid) and Alanine (a non-essential amino acid). Table 9.1 contains the codons corresponding to these amino acids and the codons you should translate each one to. All other codons should not be modified.

Your program should open and process a DNA sequence contained in a file and modify the DNA sequence as described above and output the artificial DNA sequence to a new output file.

Amino Acid	Codon	Artificial Codon
Threonine	ACT	AYT
	ACC	AYY
	ACA	AYA
	ACG	AYX
Alanine	GCT	XYT
	GCC	XYY
	GCA	XYA
	GCG	XYX

Table 9.1.: Amino Acid Codons

10. Encapsulation & Objects

One reason we prefer to write programs in high-level programming languages is that we can write programs using syntax that is closer to plain English. Granted, programming language syntax is a far cry from “natural” language, but it is far closer than lower level languages such as assembly or binary machine code. However, from what we’ve seen so far, when writing programs we are still forced to utilize the primitive variable types built-in to the language we’re using. This is still quite limiting.

As a motivating example, suppose we were to write a program that involved organizing the enrollment of students into courses. To model a particular student, we would need a collection of variables, say a first name, last name, GPA, and a unique identification number (likely a lot more, but let’s keep it simple). Each of these pieces of data could be modeled by strings, a floating-point number and perhaps an integer.¹ Each of these pieces of data are stored in separate, unrelated variables even though they represent a single *entity*.

Even worse, suppose that we needed to keep track of a collection of students. Each piece of data would need to be stored in a separate array. If we wanted to rearrange the data (say, sort it), we would need to do a lot of manual bookkeeping to make sure that the separate pieces of data that represented a single entity were all aligned at the same index in each of the arrays. If we wanted to pass the data around to functions, we’d be forced to pass multiple arrays to each function. This becomes all the more complex when we attempt to model entities with more pieces of data.

The solution is to *encapsulate* the pieces of data into one logical entity, sometimes referred to as an *object*. More formally, *encapsulation* is a mechanism by which pieces of data can be grouped together along with the functions that operate on that data. Encapsulation may also provides a means to *protect* that data.

TODO: Contrast with array (also a collection of data); difference: columns vs rows in a table

¹Depending on the identification number, it may be more appropriately modeled with a string. Social Security Numbers for example are not purely numeric: they include dashes and may begin with zeros.

10.1. Objects

OOP: design paradigm; some non-OOP languages support some aspects, not all OOP languages support all aspects or in the same way, etc. Big four: Abstraction, Encapsulation, Inheritance, Polymorphism; for now we'll only focus on Encapsulation.

Collection

Protection

Inclusion of methods

10.1.1. Structures

Only the collection of data

10.1.2. Construction

constructors or factory methods

10.1.3. Usage

variable types,

accessing member fields; getters/setters

passing as functions

10.1.4. Composition

ownership of other objects, collections of objects (aggregation)

10.2. Design Considerations

bottom-up

anytime you need to associate pieces of data, it may be appropriate to collect it into an object

10.3. Exercises

Exercise 10.1. A *complex* number consists of two real numbers: a real component a and an imaginary component bi where $i = \sqrt{-1}$. Define an object or structure to model a complex number. Write functions to:

- Create a complex number
- Print a complex number
- Perform basic arithmetic operations on two complex numbers including addition, subtraction and multiplication as defined by:

$$c_1 + c_2 = (a_1 + b_1i) + (a_2 + b_2i) = (a_1 + a_2) + (b_1 + b_2)i$$

$$c_1 - c_2 = (a_1 + b_1i) - (a_2 + b_2i) = (a_1 - a_2) + (b_1 - b_2)i$$

$$c_1 \cdot c_2 = (a_1 + b_1i) \cdot (a_2 + b_2i) = (a_1a_2 - b_1b_2) + (a_1b_2 + b_1a_2)i$$

Exercise 10.2. Design an object (or structure) that models an album. Include at least the album title, artist (or band) and release year. Include any other data that you think is relevant and write functions to support your object.

11. Recursion

TODO

11.1. Exercises

Exercise 11.1. TODO

12. Searching & Sorting

TODO

12.1. Exercises

Exercise 12.1. TODO

13. Graphical User Interfaces & Event Driven Programming

TODO

14. Introduction to Databases & Database Connectivity

TODO

Part I.

The C Programming Language

15. Basics

The C programming language is a relatively old language, but still widely used to this day. It is nearly universal in that nearly every system, platform, and operating system has a C compiler that produces machine code for that system. C is used extensively in systems programming for operating system kernels, embedded systems, microcontrollers, and supercomputers. It is generally an “imperative” language which is a paradigm that characterizes computation in terms of executable statements and functions that change a program’s state (variable values). C has been highly influential in the design of other languages including C++, Objective-C, C#, Java, PHP, Python, among many others. Many languages have adopted the basic syntactic elements and structured programming approach of the C language.

C was originally developed by Dennis Ritchie while at AT&T Bell Labs 1969–1972. C was born out of the need for a new language for the PDP-11 minicomputer that used the Unix operating system (written by Ken Thompson). From its inception, C has had a close relation to Unix; in fact the operating system was subsequently rewritten in C, making it the first OS to be written in a language other than assembly. The language was dubbed “C” as its predecessor was named “B”, a simplified version of BCPL (Basic Combined Programming Language). The first formal specification was published as *The C Programming Language* by Kernighan and Ritchie (1978) [19] often referred to as “The K&R Book” which would later become the [American National Standards Institute \(ANSI\)](#) C standard.

C gained in popularity and directly influenced object-oriented variations of it. Bjarne Stroustrup developed C++ while at Bell Labs during 1979–1983. Brad Cox and Tom Love developed Objective-C during 1981–1983 at their company Stepstone. Subsequent standards of the C language have added and extended features. In 1990, the [International Organization for Standardization \(ISO\)/IEC 9899:1990](#) standard, referred to as C89 or C90, was adopted. About every 10 years since, a new standard has been adopted; ISO/IEC 9899:1999 (referred to as C99) in 1999 and ISO/IEC 9899:2011 (C11) in 2011.

15.1. Getting Started: Hello World

The hallmark of the introduction of programming languages is the *Hello World!* program. It consists of a simple program whose only purpose is to print out the message “Hello World!” to the user in some manner. The simplicity of the program allows the focus

to be on the basic syntax of the language. It is also typically used to ensure that your development environment, compiler, runtime environment, etc. are functioning properly with a minimal example. The Hello World! program is generally attributed to Brian Kernighan who used it as an example of programming in C in 1974 [18]. A basic Hello World! program in C can be found in Code Sample 15.1.

```

1  #include<stdlib.h>
2  #include<stdio.h>
3
4  /**
5   * Basic Hello World program in C
6   * Prints "Hello World" to the standard output and exits
7   */
8  int main(int argc, char **argv) {
9
10     printf("Hello World\n");
11
12     return 0;
13 }
```

Code Sample 15.1: Hello World Program in C

We will not focus on any particular development environment, code editor, or any particular operating system, compiler, or ancillary standards in our presentation. However, as a first step, you should be able to write, compile, and run the above program on the environment you intend to use for the rest of this book. This may require that you download and install a basic C compiler/development environment (such as GCC, the GNU Compiler Collection on OSX/Unix/Linux, cygwin or MinGW for Windows) or a full IDE (such as Xcode for OSX, or Code::Blocks, <http://www.codeblocks.org/> for Windows).

15.2. Basic Elements

Using the Hello World! program as a starting point, we will now examine the basic elements of the C language.

15.2.1. Basic Syntax Rules

C is a highly influential programming language. Many modern programming languages have adopted syntactic elements that originated in C. Usually such languages are referred to as “C-style syntax” languages. These elements include the following.

- C is a statically typed language so variables must be declared along with their types before using them.
- Strings are delimited with double quotes. Single characters, including special escaped characters are delimited by single quotes; `"this is a string"`, and these are characters: `'A'`, `'4'`, `'$'` and `'\n'`
- Executable statements are terminated by a semicolon, `;`
- Code blocks are defined by using opening and closing curly brackets, `{ ... }`. Moreover, code blocks can be *nested*: code blocks can be defined within other code blocks.
- Variables are *scoped* to the code block in which they are declared and are only valid within that code block.
- In general, whitespace between coding elements is ignored.

Though not a syntactic requirement, the proper use of whitespace is important for good, readable code. Code inside code blocks is indented at the same indentation. Nested code blocks are indented further. Think of a typical table of contents or the outline of a formal paper or essay. Sections and subsections or points and points all follow proper indentation with elements at the same level at the same indentation. This convention is used to organize code and make it more readable.

15.2.2. Preprocessor Directives

The lines,

```
1 #include<stdlib.h>
2 #include<stdio.h>
```

are *preprocessor directives*. Preprocessor directives are instructions to the compiler to *modify* the source code before it starts to compile it. These particular lines are “including” standard libraries of functions so that the program can use the functionality that has already been implemented for us.

The first, `stdlib.h` represents the C standard (`std`) library (`lib`). This library is so essential that many compilers will automatically include it even if you do not explicitly do so in your program. Still, it is best practice to include it in your code.

The second, `stdio.h` is the standard (`std`) input/output (`io`) library which contains basic I/O functions that we can use. In particular, the standard output function `printf` is part of this library.

Failure to include a library means that you will not be able to use the functions it provides in your program. Using the functions without including the library may result in a compiler error. The `.h` in the library names stands for “header”; function declarations

Function	Description
<code>abs(x)</code>	Absolute value for <code>int</code> variables, $ x ^a$
<code>fabs(x)</code>	Absolute value for <code>double</code> variables
<code>ceil(x)</code>	Ceiling function, $\lceil 46.3 \rceil = 47.0$
<code>floor(x)</code>	Floor function, $\lfloor 46.3 \rfloor = 46.0$
<code>cos(x)</code>	Cosine function ^b
<code>sin(x)</code>	Sine function ^b
<code>tan(x)</code>	Tangent function ^b
<code>exp(x)</code>	Exponential function, e^x , $e = 2.71828\dots$
<code>log(x)</code>	Natural logarithm, $\ln(x)^c$
<code>log10(x)</code>	Logarithm base 10, $\log_{10}(x)^c$
<code>pow(x,y)</code>	The power function, computes x^y
<code>sqrt(x)</code>	Square root function ^c

Table 15.1.: Several functions defined in the C standard math library. ^aThe absolute value function is actually in the standard library, `stdlib.h`. ^ball trigonometric functions assume input is in *radians*, **not** degrees. ^cInput is assumed to be positive, $x > 0$.

are typically contained in a header file while their definitions are placed in a source file of the same name. We’ll explore this convention in detail when we look at functions in C (Chapter 18).

There are many other important standard libraries that we’ll touch on as needed, but another one that may be of immediate interest is the standard mathematics library, `math.h`. It includes many useful functions to compute common mathematical functions such as the square root and natural logarithm. Table 15.1 highlights several of these functions. To use them you’d include the math library in your source file `#include<math.h>` and then “call” them by providing input and getting the output. For example:

```

1 double x = 1.5;
2 double y, z;
3 y = sqrt(x); //y now has the value  $\sqrt{x} = \sqrt{1.5}$ 
4 z = sin(x); //z now has the value  $\sin(x) = \sin(1.5)$ 
```

In both of the function calls above, the value of the variable `x` is “passed” to the math function which computes and “returns” the result which then gets assigned to another variable.

Macros

Another preprocessor directive establishes *macros* using the `#define` keyword. A macro is a single instruction that specifies a more complex set of instructions. The macro can be used to define constants to be used throughout your program. To illustrate, consider the following example.

```
1 #define MILES_PER_KM 1.609
```

The macro defines an “alias” for the `MILES_PER_KM` identifier as the value 1.60934. Essentially, the C preprocessor will go through the code and any instance of `MILES_PER_KM` will be replaced with `1.609`. The advantage of using a macro like this is that we can use the identifier `MILES_PER_KM` throughout our program instead of mysterious numbers whose meaning and intent may not be immediately clear. Moreover, if we want to change the definition (say make it more precise, 1.60934) then we only need to change the macro instead of making the same change throughout our program.

As a stylistic note: macro constants in C are usually associated with uppercase underscore casing as in our example. Also, the math standard library defines several macros for common mathematical constants such as π , e , and $\sqrt{2}$ (`M_PI`, `M_E`, and `M_SQRT2` respectively) among others.

15.2.3. Comments

Comments can be written in a C program either as a single line using two forward slashes, `//comment` or as a multiline comment using a combination of forward slash and asterisk: `/* comment */`. With a single line comment, everything on the line *after* the forward slashes is ignored. With a multiline comment, everything in between the forward slash/asterisk is ignored. Comments are ultimately ignored by the compiler so the amount of comments do not have an effect on the final executable code. Consider the following example.

```
1 //this is a single line comment
2 int x; //this is also a single line comment, but after some code
3
4 /*
5    This is a comment that can
6    span multiple lines to format the comment
7    message more clearly
8 */
9 double y;
```

Most code editors and IDEs will present comments in a special color or font to distinguish them from the rest of the code (just as our example above does). Failure to close a multiline comment will likely result in a compiler error but with color-coded comments

its easy to see the mistake visually.

15.2.4. The `main` Function

Every executable program has to have a beginning: a point at which the program starts to execute. In C, the starting point is the `main` function. When a program is compiled to an executable and the program is invoked, the code in the `main` function starts executing. In our example, the code associated with the `main` function placed in between the two curly brackets is part of the `main` function. At the end of the function we have a `return` statement. We'll examine `return` statements in detail when we examine functions, for now though, the program is "returning" a zero value to the operating system. The convention in C is that zero indicates "no error occurred" while a non-zero value is used to indicate that "some" error occurred (the value used is determined by system standards such as the [Portable Operating System Interface \(POSIX\)](#) standard).

In addition, our `main` function has two *arguments*: `argc` and `argv` which serve to communicate any command line arguments provided to the program (review Section 2.4.4 for details). The first, `argc` is an integer that indicates the *number* of arguments provided *including* the executable file name itself. The second, `argv` actually stores the arguments as strings. We'll be able to understand the syntax later on, but for now we can at least understand how we might convert these arguments to different types such as integers and floating-point numbers.

First, recall that `argv` is the argument *vector*: it is an array (see Chapter 20) of the command line arguments. To access them, you can *index* them starting at zero, the first being `argv[0]`, the second `argv[1]`, etc. (the last one of course would be at `argv[argc-1]`). The first one is always the name of the executable file being run. The remaining are the command line arguments provided by the user.

To convert them you can use two different functions, `atoi` and `atof` which are short for **al**phanumeric **t**o **i**nteger and **al**phanumeric **t**o **f**loating-point number respectively. An example:

```
1 //prints the first command line argument:
2 printf("%s\n", argv[0]);
3 //converts the "second" command line argument to an integer
4 int x = atoi(argv[1]);
5 //converts the "third" command line argument to a double:
6 double y = atof(argv[2]);
```

15.3. Variables

As previewed, the three main primitive types supported in C are `int`, `double`, and `char` which support integers, floating-point numbers, and single [ASCII](#) characters.

Integer (`int`) types are only guaranteed to “be at least” 16 bytes by the C standard but are usually 32-bit signed integers on most modern systems¹. With a 32-bit signed `int` we can represent integers between $-2,147,483,648$ and $2,147,483,647$.

Doubles (`double`) types are usually double-precision floating-point numbers as per the IEEE 754 standard and provide about 16 digits of precision.

Though C does provide a `float` (single precision floating-point number) type and there are various modifiers such as `short`, `long`, `unsigned` and `signed` that can be used, but these are either system-dependent or rely on later versions of the C standard (such as C99). We will restrict our focus to more portable, interoperable code and stick with the basic two types in most of our code.

Finally, the `char` type is typically a single byte that represents a single ASCII character. For all intents and purposes a `char` can be treated as an integer in the range 0 to 127 (or 255) as defined by the ASCII text table (see Table 2.4).

15.3.1. Declaration & Assignment

C is a statically typed language meaning that all variables must be declared before you can use them or refer to them. In addition, when declaring a variable, you must specify both its type and its identifier. For example:

```
1 int numUnits;
2 double costPerUnit;
3 char firstInitial;
```

Each declaration specifies the variables type followed by the identifier and ending with a semicolon. The identifier rules are fairly standard: a name can consist of lower and uppercase alphabetic characters, numbers, and underscores but may *not* begin with a numeric character. We adopt the modern camelCasing naming convention for variables in our code.

The assignment operator is a single equal sign, `=` and is a right-to-left assignment. That is, the variable that we wish to assign the value to appears on the left-hand-side while the value (literal, variable or expression) is on the right-hand-side. Using our variables from before, we can assign them values:

```
1 numUnits = 42;
2 costPerUnit = 32.79;
3 firstInitial = 'C';
```

An important thing to understand and to keep in mind is: if you declare a variable but do not assign it a value, its value is *undefined*. That is, if we code something like `int a;`, the value of the variable `a` is *not* necessarily zero; depending on the system, it could

¹You may have to deal with 16-bit `int` types in legacy systems/compilers or in modern embedded systems.

contain a special value that indicates “uninitialized memory” or it could contain garbage, or it *could* have the value zero. The C standard does *not* specify default values for variables. The default value of variables is highly system dependent—on the compiler, the libraries, and even the operating system. Do not make any assumptions on the initial or default values of variables. If you need such assumptions, then values must be assigned.

For brevity, C allows you to declare a variable and immediately assign it a value on the same line. So these two code blocks could have been more compactly written as:

```
1 int numUnits = 42;
2 double costPerUnit = 32.79;
3 char firstInitial = 'C';
```

As another shorthand, we can declare multiple variables on the same line by delimiting them with a comma. However, they *must* be of the same type. We can also use an assignment with them.

```
1 int numOrders, numUnits = 42, numCustomers = 10, numItems;
2 double costPerUnit = 32.79, salesTaxRate;
```

Another convenient keyword is `const`, short for “constant”. We can apply it to any variable to indicate that it is a read-only variable. Of course, we *must* assign it a value at declaration. For example:

```
1 const int secret = 42;
2 const double salesTaxRate = 0.075;
```

Any attempt to reassign the values of `const` variables will result in a compiler error.

15.4. Operators

C supports the standard arithmetic operators for addition, subtraction, multiplication, and division using `+`, `-`, `*`, and `/` respectively. Each of these operators is a binary operator that acts on two operands which can either be literals or other variables and follow the usual rules of arithmetic when it comes to order of precedence (multiplication and division before addition and subtraction).

```

1  int a = 10, b = 20, c = 30, d;
2  d = a + 5;
3  d = a + b;
4  d = a - b;
5  d = a + b * c;
6  d = a * b;
7  d = a / b; //integer division and truncation! See below
8
9  double x = 1.5, y = 3.4, z = 10.5, w;
10 w = x + 5.0;
11 w = x + y;
12 w = x - y;
13 w = x + y * z;
14 w = x * y;
15 w = x / y;
16
17 //you can do arithmetic with both types:
18 w = a + x;
19 d = b + y; //truncation also occurs here!

```

Special care must be taken when dealing with `int` types. For all four operators, if both operands are integers, the result will be an integer. For addition, subtraction, and multiplication this isn't a big deal, but for division it means that when we divide, say `10 / 20`, the result is not 0.5 as expected. The number 0.5 is a floating-point number. As such, the fractional part gets **truncation**truncated (cut off and thrown out) leaving only zero. In the code above, `d = a / b;` the variable `d` ends up getting the value zero because of this.

Similarly, attempting to assign a floating-point number to an integer also results in truncation because an `int` type cannot handle the fractional part. In the line `d = b + y` above, `b + y` is correctly $20 + 3.4 = 23.4$, but when assigned to the `int` variable `d` the .4 gets truncated and `d` has the value 23.

Assigning an `int` value to a `double` variable is not a problem as the integer 2 becomes the floating-point number 2.0.

A solution to this problem is to use explicit **type casting** to force at least one of the operands in an integer division to become a `double` type. For example:

```

1  int a = 10, b = 20;
2  double x;
3
4  x = (double) a / b;

```

results in `x` getting the “correct” value of 0.5. This works because the `(double)` code forces the `int` variable `a` to *temporarily* be treated as a double variable (in this case

10.0) for the purposes of division (so that truncation does *not* occur).

C also supports the integer remainder operator using the `%` symbol. This operator gives the remainder of the result of dividing two integers. Examples:

```
1  int x;
2
3  x = 10 % 5; //x is 0
4  x = 10 % 3; //x is 1
5  x = 29 % 5; //x is 4
```

15.5. Basic I/O

The C Standard I/O library (`stdio.h`) contains many functions that facilitate input and output including `printf` for standard output and `scanf` (**s**can **f**ormatted input) for standard input.

The `printf` function works exactly as discussed in Section 2.4.3. The `scanf` function works using similar placeholders as `printf`. To illustrate how it works, consider the following lines of code:

```
1  int a;
2  printf("Please enter a number: ");
3  scanf("%d", &a);
```

The `printf` statement prompts the user for an input. The `scanf` then executes and the program *waits* for the user to enter input. The user is free to start typing. When the user is done, they hit the enter key at which point the program resumes and reads the input from the standard input buffer, converts the value entered by the user into an integer and places the result in the variable `a` where it can now be used by the remainder of the program.

A few points of interest. First, the same placeholder as `printf` was used, `%d` for `int` values. However, when we “passed” the variable `a` to `scanf` we placed an ampersand, `&` in front of it. This is passing the variable *by reference* and we’ll explore that concept further in Chapter 18, but for now just know that when using variables with `scanf`, an ampersand is required. Failure to place an ampersand in front of a variable with `scanf` will likely result in a *segmentation fault* (an illegal memory access).

You can use the same placeholder, `%c` with `scanf` to read in single characters as well. However, for floating-point numbers, in particular `double` types, the placeholder `%lf` must be used (which stands for long float, a double precision number). Failure to use the correct placeholder may result in garbage results as the input will be interpreted incorrectly. Another example:

```

1 double x;
2 printf("Please enter a fractional number: ");
3 scanf("%lf", &x);

```

Another potential problem is that `scanf` expects a certain *format* (thus its name). If we prompt the user for a number but they just start mashing the keyboard giving non-numerical input, we may get incorrect results. `scanf` will likely interpret the input as zero. It may be very difficult to distinguish between the case of a user actually entering in zero as a legitimate input versus bad input. In general, `scanf` is not a good mechanism for reading input (and in fact can be very dangerous), but it is a good starting point.

15.6. Examples

15.6.1. Converting Units

Let's start with a simple task: let's write a program that will prompt the user to enter a temperature in degrees Fahrenheit and convert it to degrees Celsius using the formula

$$C = (F - 32) \cdot \frac{5}{9}$$

We begin with the basic program outline which will include preprocessor directives to bring in the standard library and the standard input/output library (after all, we'll need to prompt for input and print the result as output to the user). Further, we want our program to be executable, so we need to put our code into the main method. Finally, we'll document our program to indicate its purpose.

```

1 #include<stdlib.h>
2 #include<stdio.h>
3
4 /**
5  * This program converts Fahrenheit temperatures to
6  * Celsius
7  */
8 int main(int argc, char **argv) {
9
10     //TODO: implement this
11
12     return 0;
13 }

```

It is common for programmers to use a comment along with a `TODO` note to themselves as a reminder of things that they still need to do with the program.

Let's first outline the basic steps that our program will go through:

1. We'll first prompt the user for input, asking them for a temperature in Fahrenheit
2. Next we'll read the user's input, likely into a floating-point number as degrees can be fractional
3. Once we have the input, we can calculate the degrees Celsius by using the formula above
4. Lastly, we will want to print the result to the user to inform them of the value

Sometimes it's helpful to write an outline of such a program directly in the code using comments to provide a step-by-step process. For example:

```

1  #include<stdlib.h>
2  #include<stdio.h>
3
4  /**
5   * This program converts Fahrenheit temperatures to
6   * Celsius
7   */
8  int main(int argc, char **argv) {
9
10     //TODO: implement this
11     //1. Prompt the user for input in Fahrenheit
12     //2. Read the Fahrenheit value from the standard input
13     //3. Compute the degrees Celsius
14     //4. Print the result to the user
15
16     return 0;
17 }
```

As we read each step it becomes apparent that we'll need a couple of variables: one to hold the Fahrenheit (input) value and one for the Celsius (output) value. It also makes sense that each of these should be `double` variables as we want to support fractional values. So at the top of our `main` function, we'll add the variable declarations:

```
double fahrenheit, celsius;
```

Each of the steps is now straightforward; we'll use a `printf` statement in the first step to prompt the user for input:

```
printf("Please enter degrees in Fahrenheit: ");
```

In the second step, we'll use the standard input to read the `fahrenheit` variable value from the user. Recall that we use the placeholder `%lf` for reading `double` values and use an ampersand when using `scanf`:

```
scanf("%lf", &fahrenheit);
```

We can now compute `celsius` using the formula provided:

```
celsius = (fahrenheit - 32) * (5 / 9);
```

Finally, we use `printf` again to output the result to the user:

```
printf("%f Fahrenheit is %f Celsius\n", fahrenheit, celsius);
```

Try typing and running the program as defined above and you'll find that you don't get correct answers. In fact, you'll find that no matter what values you enter, you get zero. This is because of the calculation using `5 / 9`: recall what happens with integer division: truncation! This will *always* end up being zero.

One way we could fix it would be to pull out our calculators and find that $\frac{5}{9} = 0.55555\dots$ and replace `5/9` with `0.555555`. But, how many fives? It may be difficult to tell how accurate we can make this floating-point number by hardcoding it ourselves. A much better approach would be to let the compiler take care of the optimal computation for us by making at least one of the numbers a `double` to prevent integer truncation. That is, we should instead use `5.0 / 9`.

The full program can be found in Code Sample [15.2](#).

```

1  #include<stdlib.h>
2  #include<stdio.h>
3
4  /**
5   * This program converts Fahrenheit temperatures to
6   * Celsius
7   */
8  int main(int argc, char **argv) {
9
10     double fahrenheit, celsius;
11
12     //1. Prompt the user for input in Fahrenheit
13     printf("Please enter degrees in Fahrenheit: ");
14
15     //2. Read the Fahrenheit value from the standard input
16     scanf("%lf", &fahrenheit);
17
18     //3. Compute the degrees Celsius
19     celsius = (fahrenheit - 32) * 5.0/9;
20
21     //4. Print the result to the user
22     printf("%f Fahrenheit is %f Celsius\n", fahrenheit, celsius);
23
24     return 0;
25 }

```

Code Sample 15.2: Fahrenheit-to-Celsius Conversion Program in C

15.6.2. Computing Quadratic Roots

Some programs require the user to enter multiple inputs. The prompt-input process can be repeated. In this example, consider asking the user for the coefficients, a, b, c to a quadratic polynomial,

$$ax^2 + bx + c$$

and computing its roots using the quadratic formula,

$$x = \frac{-b \pm \sqrt{b^2 - 4ac}}{2a}$$

As before, we can create a basic program with a `main` function and start filling in the details. In particular, we'll need to prompt for the input a , then read it in; then prompt for b , read it in and repeat for c . We'll also need several variables: three for the coefficients a, b, c and *two* more; one for each root. Thus, we have


```

1 double a, b, c, root1, root2;
2
3 printf("Please enter a: ");
4 scanf("%lf", &a);
5 printf("Please enter b: ");
6 scanf("%lf", &b);
7 printf("Please enter c: ");
8 scanf("%lf", &c);

```

Now to compute the roots: we need to take care that we correctly adapt the formula so it accurately reflects the order of operations. We also need to use the standard math library's square root function (unless you want to write your own!² Carefully adapting the formula leads to

```

1 root1 = (-b + sqrt(b*b - 4*a*c) ) / (2*a);
2 root1 = (-b - sqrt(b*b - 4*a*c) ) / (2*a);

```

Finally, we print the output using `printf`. The full program can be found in Code Sample 15.3.

This program was interactive. As an alternative, we could have read all three of the inputs as command line arguments, taking care that we need to convert them to floating-point numbers. Lines 12–17 in the program could have been changed to

```

1 a = atof(argv[1]);
2 b = atof(argv[2]);
3 c = atof(argv[3]);

```

Finally, think about the possible inputs a user could provide that may cause problems for this program. For example:

- What if the user entered zero for a ?
- What if the user entered some combination such that $b^2 < 4ac$?
- What if the user entered non-numeric values?
- For the command line argument version, what if the user provided less than three argument? Or more?

How might we prevent the consequences of such bad inputs? That is, how might we handle the even that a users enters those bad inputs and how do we communicate these errors to the user? To do so we'll need conditionals.

²We *will* write several square root methods as exercises later!

```

1  #include<stdlib.h>
2  #include<stdio.h>
3  #include<math.h>
4
5  /**
6   * This program computes the roots to a quadratic equation
7   * using the quadratic formula.
8   */
9  int main(int argc, char **argv) {
10
11     double a, b, c, root1, root2;
12
13     printf("Please enter a: ");
14     scanf("%lf", &a);
15     printf("Please enter b: ");
16     scanf("%lf", &b);
17     printf("Please enter c: ");
18     scanf("%lf", &c);
19
20     root1 = (-b + sqrt(b*b - 4*a*c) ) / (2*a);
21     root2 = (-b - sqrt(b*b - 4*a*c) ) / (2*a);
22
23     printf("The roots of %fx^2 + %fx + %f are: \n", a, b, c);
24     printf("  root1 = %f\n", root1);
25     printf("  root2 = %f\n", root2);
26     return 0;
27 }

```

Code Sample 15.3: Quadratic Roots Program in C

16. Conditionals

C supports the basic if, if-else, and if-else-if conditional structures as well as switch statements. Logical statements are built using the standard logical operators for numeric comparisons as well as logical operators such as negations, AND, and OR. However, there are a few idiosyncrasies that need to be understood.

16.1. Logical Operators

C has no built-in Boolean type, nor does it have any keywords associated with *true* and *false*. Instead, C uses numeric types as implicit Boolean types with the convention that zero is associated with *false* and *any* non-zero value is associated with *true*. So the values 1, 2.5, and even negatives, -1 , -123.2421 , etc. are all interpreted as *true* when used in logical statements.

The standard numeric comparison operators are also supported. Consider the following code snippet:

```
1  int a = 10;
2  int b = 20;
3  int c = 10;
4  int d = 0;
```

The six standard comparison operators are presented in Table 16.1 using these variables as examples. The comparison operators are the same when used with `double` types as well and `int` types and `double` types can be compared with each other without type casting.

The three basic logical operators are also supported as described in Table 16.2 using the same code snippet variable values as examples.

16.1.1. Order of Precedence

At this point it is worth summarizing the order of precedence of all the operators that we've seen so far including assignment, arithmetic, comparison, and logical. Since all of these operators could be used in one statement, for example,

```
(b*b < 4*a*c || a == 0 || argc != 4)
```

16. Conditionals

Name	Operator Syntax	Examples	Value
Equals	<code>==</code>	<code>a == 10</code> <code>b == 10</code> <code>a == b</code> <code>a == c</code>	<i>true</i> <i>false</i> <i>false</i> <i>true</i>
Not Equals	<code>!=</code>	<code>a != 10</code> <code>b != 10</code> <code>a != b</code> <code>a != c</code>	<i>false</i> <i>true</i> <i>true</i> <i>false</i>
Strictly Less Than	<code><</code>	<code>a < 15</code> <code>a < 5</code> <code>a < b</code> <code>a < c</code>	<i>true</i> <i>false</i> <i>true</i> <i>false</i>
Less Than Or Equal To	<code><=</code>	<code>a <= 15</code> <code>a <= 5</code> <code>a <= b</code> <code>a <= c</code>	<i>true</i> <i>false</i> <i>true</i> <i>true</i>
Strictly Greater Than	<code>></code>	<code>a > 15</code> <code>a > 5</code> <code>a > b</code> <code>a > c</code>	<i>false</i> <i>true</i> <i>false</i> <i>false</i>
Greater Than Or Equal To	<code>>=</code>	<code>a >= 15</code> <code>a >= 5</code> <code>a >= b</code> <code>a >= c</code>	<i>false</i> <i>true</i> <i>false</i> <i>true</i>

Table 16.1.: Comparison Operators in C

Operator	Operator Syntax	Examples	Values
Negation	<code>!</code>	<code>!a</code> <code>!d</code>	<i>false</i> <i>true</i>
AND	<code>&&</code>	<code>a && b</code> <code>a && d</code>	<i>true</i> <i>false</i>
OR	<code> </code>	<code>a b</code> <code>a d</code>	<i>false</i> <i>true</i>

Table 16.2.: Logical Operators in C

	Operator(s)	Associativity	Notes
Highest	<code>++</code> , <code>--</code>	left-to-right	increment operators
	<code>-</code> , <code>!</code>	right-to-left	unary negation operator, logical not
	<code>*</code> , <code>/</code> , <code>%</code>	left-to-right	
	<code>+</code> , <code>-</code>	left-to-right	addition, subtraction
	<code><</code> , <code><=</code> , <code>></code> , <code>>=</code>	left-to-right	comparison
	<code>==</code> , <code>!=</code>	left-to-right	equality, inequality
	<code>&&</code>	left-to-right	logical AND
	<code> </code>	left-to-right	logical OR
Lowest	<code>=</code> , <code>+=</code> , <code>-=</code> , <code>*=</code> , <code>/=</code>	right-to-left	assignment and compound assignment operators

Table 16.3.: Operator Order of Precedence in C. Operators on the same level have equivalent order and are performed in the associative order specified.

it is important to understand the order in which each one gets evaluated. Table 16.3 summarizes the order of precedence for the operators seen so far. This is not an exhaustive list of C operators.

16.1.2. Comparing Strings and Characters

The comparison operators in Table 16.1 can also be used for *single characters* because of the nature of the ASCII text table (see Table 2.4). Each alphanumeric character, including the various symbols and whitespace characters, is associated with an integer 0–127. We can therefore write statements like `('A' < 'a')`, which is *true* since uppercase letters are ordered before lowercase letters in the ASCII table (`('A'` is 65 and `('a'` is 97 and so `65 < 97` is *true*). Several more examples can be found in Table 16.4.

Comparison Example	Result
<code>('A' < 'a')</code>	<i>true</i>
<code>('A' == 'a')</code>	<i>false</i>
<code>('A' < 'Z')</code>	<i>true</i>
<code>('0' < '9')</code>	<i>true</i>
<code>('\\n' < 'A')</code>	<i>true</i>
<code>(' ' < '\\n')</code>	<i>false</i>

Table 16.4.: Character comparisons in C

Numeric comparison operators *cannot* be used to compare strings in C. For example, if we could write `("aardvark" < "zebra")` which would be valid C, and it would even have a result. However, that result wouldn't necessarily be *true* or *false*. The reason for this is that strings in C are actually represented as arrays, which in turn are represented

as *memory locations*. We'll explore these issues in greater depth later on, but for now understand that you can write this code, it will compile, and it will even run. However, the results will not be as expected.

16.2. If, If-Else, If-Else-If Statements

Conditional statements in C utilize the key words `if`, `else`, and `else if`. Conditions are placed inside parentheses immediately after the `if` and `else if` keywords. Examples of all three can be found in Code Sample 16.1.

```

1  //example of an if statement:
2  if(x < 10) {
3      printf("x is less than 10\n");
4  }
5
6  //example of an if-else statement:
7  if(x < 10) {
8      printf("x is less than 10\n");
9  } else {
10     printf("x is 10 or more \n");
11 }
12
13 //example of an if-else-if statement:
14 if(x < 10) {
15     printf("x is less than 10\n");
16 } else if(x == 10) {
17     printf("x is equal to ten\n");
18 } else {
19     printf("x is greater than 10\n");
20 }
```

Code Sample 16.1: Examples of Conditional Statements in C

Some observations about the syntax: the statement, `if(x < 10)` does not have a semicolon at the end. This is because it is a conditional statement that determines the flow of control and *not* an executable statement. Therefore, no semicolon is used. Suppose we made a mistake and *did* include a semicolon:

```

1  int x = 15;
2  if(x < 10); {
3      printf("x is less than 10\n");
4  }
```

Some compilers may give a warning, but this is valid C; it will compile and it will run.

However, it will end up printing `x is less than 10`, even though $x = 15$! Recall that a conditional statement *binds* to the executable statement or code block *immediately* following it. In this case, we've provided an *empty* executable statement ended by the semicolon. The code is essentially equivalent to

```
1 int x = 15;
2 if(x < 10) {
3 }
4 printf("x is less than 10\n");
```

Which is obviously not what we wanted. The semicolon ended up binding to the empty executable statement, and the code block containing the print statement immediately followed, but was *not* bound to the conditional statement which is why the print statement executed regardless of the value of x .

Another convention that we've used in our code is where we have placed the curly brackets. First, if a conditional statement is bound to only one statement, the curly brackets are not necessary. However, it is best practice to include them even if they are not necessary and we'll follow this convention. Second, the opening curly bracket is on the same line as the conditional statement while the closing curly bracket is indented to the same level as the start of the conditional statement. Moreover, the code inside the code block is indented. If there were more statements in the block, they would have all been at the same indentation level.

16.3. Examples

16.3.1. Computing a Logarithm

The logarithm of x is the exponent that some *base* must be raised to get x . The most common logarithm is the natural logarithm, $\ln(x)$ which is base $e = 2.71828\dots$. But logarithms can be in any base $b > 1$ ¹ What if we wanted to compute $\log_2(x)$? Or $\log_\pi(x)$? Let's write a program that will prompt the user for a number x and a base b and computes $\log_b(x)$.

Arbitrary bases can be computed using the change of base formula:

$$\log_b(x) = \frac{\log_a(x)}{\log_a(b)}$$

If we can compute *some* base a , then we can compute any base b . Fortunately we have such a solution. Recall that the standard library provides a function to compute the natural logarithm, `log()`. This is one of the fundamentals of problems solving: if a solution already exists, use it. In this case, a solution exists for a different, but similar

¹Bases can also be $0 < b < 1$, but we'll restrict our attention to increasing functions only.

16. Conditionals

problem (computing the natural logarithm), but we can *adapt* the solution using the change of base formula. In particular, if we have variables `b` (base) and `x`, we can compute $\log_b(x)$ using

```
log(x) / log(b)
```

But wait: we have a problem similar to the examples in the previous section. The user could enter invalid values such as $b = -10$ or $x = -2.54$ (logarithms are undefined for non-positive values in any base). We want to ensure that $b > 1$ and $x > 0$. With conditionals, we can now do this. Once we have read in the input from the user we can make a check for good input using an `if` statement.

```
1  if(x <= 0 || b <= 1) {  
2      printf("Error: bad input!\n");  
3      exit(1);  
4  }
```

This code has something new: `exit(1)`. The `exit` function immediately terminates the program regardless of the rest of the code that may remain. The argument passed to `exit` is an integer that represents an *error code*. The convention is that zero indicates “no error” while non-zero values indicate some error. This is a simple way of performing *error handling*: if the user provides bad input, we inform them and quit the program, forcing them to run it again and provide good input. By prematurely terminating the program we avoid any illegal operation that would give a bad result.

Alternatively, we could have split the conditions into two statements and given a more descriptive error message. We use this design in the full program which can be found in Code Sample 16.2. The program also takes the input as command line arguments. Now that we have conditionals, we can actually check that the correct number of arguments was provided by the user and quit in the event that they don’t provide the correct number.

16.3.2. Life & Taxes

Let’s adapt the conditional statements we developed in Section 3.6.4 into a full C program. The first thing we need to do is establish the variables we’ll need and read them in from the user. At the same time we can check for bad input (negative values) for both the inputs.


```

1  double income, tax, numChildren, credit;
2
3  printf("Please enter your Adjusted Gross Income: ");
4  scanf("%lf", &income);
5
6  printf("How many children do you have?");
7  scanf("%d", &numChildren);
8
9  if(income < 0 || numChildren < 0) {
10     printf("Invalid inputs");
11     exit(1);
12 }

```

Next, we can code a series of if-else-if statements for the income range. By placing the ranges in increasing order, we only need to check the upper bounds just as in the original example.

```

1  if(income <= 18150) {
2     baseTax = income * .10;
3  } else if(income <= 73800) {
4     baseTax = 1815 + (income - 18150) * .15;
5  } else if(income <= 148850) {
6     ...
7  } else {
8     baseTax = 127962.50 + (income - 457600) * .396;
9  }

```

Next we compute the child tax credit, taking care that it does not exceed \$3,000. A conditional based on the number of children should suffice as at this point in the program we already know it is zero or greater.

```

1  if(numChildren <= 3) {
2     credit = numChildren * 1000;
3  } else {
4     credit = 3000;
5  }

```

Finally, we need to ensure that the credit does not exceed the total tax liability (the credit is non-refundable, so if the credit is greater, the tax should only be zero, not negative).

```

1  if(baseTax - credit >= 0) {
2     totalTax = baseTax - credit;
3  } else {
4     totalTax = 0;
5  }

```

The full program is presented in Code Sample 16.3.

16.3.3. Quadratic Roots Revisited

Let's return to the quadratic roots program we previously designed that uses the quadratic equation to compute the roots of a quadratic polynomial by reading coefficients a, b, c in from the user. One of the problems we had previously identified is if the user enters "bad" input: if $a = 0$, we would end up dividing by zero; if $b^2 - 4ac < 0$ then we would have complex roots. With conditionals, we can now check for these issues and exit with an error message.

Another potential case we might want to handle differently is when there is only one distinct root ($b^2 - 4ac = 0$). In that case, the quadratic formula simplifies to $\frac{-b}{2a}$ and we can print a different, more specific message to the user. The full program can be found in Code Sample 16.4.

```

1  #include<stdlib.h>
2  #include<stdio.h>
3  #include<math.h>
4
5  /**
6   * This program computes the logarithm base b (b > 1)
7   * of a given number x > 0
8   */
9  int main(int argc, char **argv) {
10
11     double b, x, result;
12     if(argc != 3) {
13         printf("Usage: %s b x \n", argv[0]);
14         exit(1);
15     }
16
17     b = atof(argv[1]);
18     x = atof(argv[2]);
19
20     if(x <= 0) {
21         printf("Error: x must be greater than zero\n");
22         exit(1);
23     }
24     if(b <= 1) {
25         printf("Error: base must be greater than one\n");
26         exit(1);
27     }
28
29     result = log(x) / log(b);
30     printf("log_(%f)(%f) = %f\n", b, x, result);
31     return 0;
32 }

```

Code Sample 16.2: Logarithm Calculator Program in C

16. Conditionals

```
1  #include<stdlib.h>
2  #include<stdio.h>
3
4  int main(int argc, char **argv) {
5
6      double income, baseTax, credit, totalTax;
7      int numChildren;
8
9      //prompt for income from the user
10     printf("Please enter your Adjusted Gross Income: ");
11     scanf("%lf", &income);
12
13     //prompt for children
14     printf("How many children do you have?");
15     scanf("%d", &numChildren);
16
17     if(income < 0 || numChildren < 0) {
18         printf("Invalid inputs");
19         exit(1);
20     }
21
22     if(income <= 18150) {
23         baseTax = income * .10;
24     } else if(income <= 73800) {
25         baseTax = 1815 + (income - 18150) * .15;
26     } else if(income <= 148850) {
27         baseTax = 10162.50 + (income - 73800) * .25;
28     } else if(income <= 225850) {
29         baseTax = 28925.00 + (income - 148850) * .28;
30     } else if(income <= 405100) {
31         baseTax = 50765.00 + (income - 225850) * .33;
32     } else if(income <= 457600) {
33         baseTax = 109587.50 + (income - 405100) * .35;
34     } else {
35         baseTax = 127962.50 + (income - 457600) * .396;
36     }
37
38     if(numChildren <= 3) {
39         credit = numChildren * 1000;
40     } else {
41         credit = 3000;
42     }
43
44     if(baseTax - credit >= 0) {
45         totalTax = baseTax - credit;
46     } else {
47         totalTax = 0;
48     }
49
50     printf("AGI:           $%10.2f\n", income);
51     printf("Tax:           $%10.2f\n", baseTax);
52     printf("Credit:          $%10.2f\n", credit);
53     printf("Tax Liability: $%10.2f\n", totalTax);
54
55     return 0;
56 }
```

```

1  #include<stdlib.h>
2  #include<stdio.h>
3  #include<math.h>
4
5  /**
6   * This program computes the roots to a quadratic equation
7   * using the quadratic formula.
8   */
9  int main(int argc, char **argv) {
10
11     double a, b, c, root1, root2;
12
13     if(argc !=4) {
14         printf("Usage: %s a b c\n", argv[0]);
15         exit(1);
16     }
17
18     a = atof(argv[1]);
19     b = atof(argv[2]);
20     c = atof(argv[3]);
21
22     if(a == 0) {
23         printf("Error: a cannot be zero\n");
24         exit(1);
25     } else if(b*b < 4*a*c) {
26         printf("Error: cannot handle complex roots\n");
27         exit(1);
28     } else if(b*b == 4*a*c) {
29         root1 = -b / (2*a);
30         printf("Only one distinct root: %f\n", root1);
31     } else {
32         root1 = (-b + sqrt(b*b - 4*a*c) ) / (2*a);
33         root2 = (-b - sqrt(b*b - 4*a*c) ) / (2*a);
34
35         printf("The roots of %fx^2 + %fx + %f are: \n", a, b, c);
36         printf("  root1 = %f\n", root1);
37         printf("  root2 = %f\n", root2);
38     }
39     return 0;
40 }

```

Code Sample 16.4: Quadratic Roots Program in C With Error Checking

17. Loops

C supports while loops, for loops, and do-while loops using the keywords `while`, `for`, and `do` (along with another `while`). Continuation conditions for loops are enclosed in parentheses, `(...)` and the blocks of code associated with the loop are enclosed in curly brackets.

17.1. While Loops

Code Sample 17.1 contains an example of a basic while loop in C. Just as with conditional statements, our code styling places the opening curly bracket on the same line as the `while` keyword and continuation condition. The inner block of code is also indented and all lines in the block are indented to the same level.

```
1  int i = 1; //Initialization
2  while(i <= 10) { //continuation condition
3      //perform some action
4      i++; //iteration
5  }
```

Code Sample 17.1: While Loop in C

In addition, the continuation condition does *not* contain a semicolon since it is not an executable statement. Just as with an if-statement, if we *had* placed a semicolon it would have led to unintended results. Consider the following:

```
1  while(i <= 10); {
2      //perform some action
3      i++; //iteration
4  }
```

A similar problem occurs: the `while` keyword and continuation condition bind to the next executable statement or code block. As a consequence of the semicolon, the executable statement that gets bound to the while loop is *empty*. What happens is even worse: the program will enter an infinite loop. To see this, the code is essentially equivalent to the following:

17. Loops

```
1 while(i <= 10) {  
2 }  
3 {  
4     //perform some action  
5     i++; //iteration  
6 }
```

In the while loop, we never increment the counter variable `i`, the loop does nothing, and so the computation will continue on forever! Some compilers will warn you about this, others will not. It is valid C and it will compile and run, but obviously won't work as intended. Avoid this problem by using proper syntax.

Another common use case for a while loop is a flag-controlled loop in which we use a Boolean flag rather than an expression to determine if a loop should continue or not. Recall that in C, zero is treated as *false* and any non-zero numeric value is treated as *true*. We can thus create an implicit Boolean flag by using an integer variable and setting it to 1 for *true* and 0 for *false* (when we want the loop to terminate). An example can be found in Code Sample 17.2.

```
1 int i = 1;  
2 int flag = 1;  
3 while(flag) {  
4     //perform some action  
5     i++; //iteration  
6     if(i>10) {  
7         flag = 0;  
8     }  
9 }
```

Code Sample 17.2: Flag-controlled While Loop in C

17.2. For Loops

For loops in C use the familiar syntax of placing the initialization, continuation condition, and iteration on the same line as the keyword `for`. An example can be found in Code Sample 17.3.

```
1 int i;  
2 for(i=1; i<=10; i++) {  
3     //perform some action  
4 }
```

Code Sample 17.3: For Loop in C

Again, note the syntax: semicolons are placed at the end of the initialization and continuation condition, but *not* the iteration statement. Just as with while loops, the opening curly bracket is placed on the same line as the `for` keyword. Code within the loop body is indented, all at the same indentation level.

Another observation is that we declared the index variable `i` *prior* to the for loop. Some languages allow you to declare the index variable in the initialization statement, for example `for(int i=1; i<=10; i++)`. Doing so *scopes* the index variable to the loop and so `i` would be out-of-scope before and after the loop body. This is a nice convenience and is generally good practice. However, C89 and prior standards do not allow you to do this; the variable must be declared prior to the loop structure. C99 and newer standards do allow you to do this and some compilers will be somewhat forgiving when you use the newer syntax (by supporting their own non-standard extensions to C). For maximum portability, we'll follow the older convention.

17.3. Do-While Loops

Finally, C does support do-while loops. Recall that the difference between a while loop and a do-while loop is when the continuation condition is checked. For a while loop it is *prior* to the beginning of the loop body and in a do-while loop it is at the *end* of the loop. This means that a do-while always executes *at least once*. An example can be found in Code Sample 17.4.

```
1  int i;
2  do {
3      //perform some action
4      i++;
5  } while(i<=10);
```

Code Sample 17.4: Do-While Loop in C

Note the syntax and style: the opening curly bracket is again on the same line as the keyword `do`. The `while` keyword and continuation condition are on the same line as the closing curly bracket. In a slight departure from consistent syntax, a semicolon *does* appear at the end of the continuation condition even though it is not an executable statement.

17.4. Other Issues

C does not support a traditional foreach loop. When iterating over a collection like an array, you iterate a traditional index variable, typically with a for loop. However, there

17. Loops

are some syntactic tricks that you can use to get the same effect. Some of this will be a preview of Chapter 20 where we discuss arrays in C, but in short, you can assign a variable to an element in an array in iteration statement:

```
1 double arr[] = {1.41, 2.71, 3.14};
2 int n = 3;
3 int i = 0;
4 double x;
5 for(x=arr[i]; i<n; x=arr[++i]) {
6     //x now holds the i-th element in arr
7 }
```

The initialization sets the variable `x` to the first element in the array, `arr[0]`. The loop continues for as many elements as there are in the array, `n`. The iteration does two things: it assigns `x` to the next element in the array while at the same time incrementing the index variable using the prefix increment operator (see Section 2.3.6).

17.5. Examples

17.5.1. Normalizing a Number

Let's revisit the example from Section 4.1.1 in which we *normalize* a number by continually dividing it by 10 until it is less than 10. The code in Code Sample 17.5 specifically refers to the value 32145.234 but would work equally well with any value of `x`.

```
1 double x = 32145.234;
2 int k = 0;
3 while(x > 10) {
4     x = x / 10; //or: x /= 10;
5     k++;
6 }
```

Code Sample 17.5: Normalizing a Number with a While Loop in C

17.5.2. Summation

Let's revisit the example from Section 4.2.1 in which we computed the sum of integers $1 + 2 + \dots + 10$. The code is presented in Code Sample 17.6

```

1  int i;
2  int sum = 0;
3  for(i=1; i<=10; i++) {
4      sum += i;
5  }

```

Code Sample 17.6: Summation of Numbers using a For Loop in C

Of course we could easily have generalized the code somewhat. Instead of computing a sum up to a particular number, we could have written it to sum up to another variable `n`, in which case the for loop would instead look like the following.

```

1  for(i=1; i<=n; i++) {
2      sum += i;
3  }

```

17.5.3. Nested Loops

Recall that you can write loops within loops. The inner loop will execute fully *for each* iteration of the outer loop. An example of two nested of loops in C can be found in Code Sample 17.7.

```

1  int i, j;
2  int n = 10;
3  int m = 20;
4  for(i=0; i<n; i++) {
5      for(j=0; j<m; j++) {
6          printf("(i, j) = (%d, %d)\n", i, j);
7      }
8  }

```

Code Sample 17.7: Nested For Loops in C

The inner loop execute for $j = 0, 1, 2, \dots, 19 < m = 20$ for a total of 20 times. However, it executes 20 times *for each* iteration of the outer loop. Since the outer loop execute for $i = 0, 1, 2, \dots, 9 < n = 10$, the total number of times the `printf` statement execute is $10 \times 20 = 200$. In this example, the sequence $(0, 0), (0, 1), (0, 2), \dots, (0, 19), (1, 0), \dots, (9, 19)$ will be printed.

17.5.4. Paying the Piper

Let's adapt the solution for the loan amortization schedule we developed in Section 4.7.3. First, we'll read the principle, terms, and interest as command line inputs.

Adapting the formula for the monthly payment and using the standard math library's `pow` function, we get

```
double monthlyPayment = (monthlyInterestRate * principle) / (1 - pow( (1 + month
```

However, recall that we may have problems due to accuracy. The monthly payment could come out to be a fraction of a cent, say \$43.871. For accuracy, we need to ensure that all of the figures for currency are rounded to the nearest cent. The standard math library does have a `round` function, but it only rounds to the nearest whole number, not the nearest 100th.

However, we can *adapt* the “off-the-shelf” solution to fit our needs. If we take the number, multiply it by 100, we get (say) 4387.1 which we can now round to the nearest whole number, giving us 4387. We can then divide by 100 to get a number that has been rounded to the nearest 100th! In C, we could simply do the following.

```
monthlyPayment = round(monthlyPayment * 100.0) / 100.0;
```

We can use the same trick to round the monthly interest payment and any other number expected to be whole cents. To output our numbers, we use `printf` and take care to align our columns to make it look nice. To finish our adaptation, we handle the final month separately to account for an over/under payment due to rounding. The full solution can be found in Code Sample 17.8.

```

1  #include<stdio.h>
2  #include<stdlib.h>
3  #include<math.h>
4
5  int main(int argc, char **argv) {
6
7      if(argc != 4) {
8          printf("Usage: %s principle apr terms\n", argv[0]);
9          exit(1);
10     }
11
12     double principle = atof(argv[1]);
13     double apr = atof(argv[2]);
14     int n = atoi(argv[3]);
15
16     double balance = principle;
17     double monthlyInterestRate = apr / 12.0;
18     int i;
19
20     //monthly payment
21     double monthlyPayment = (monthlyInterestRate * principle) /
22         (1 - pow( (1 + monthlyInterestRate), -n));
23     //round to the nearest cent
24     monthlyPayment = round(monthlyPayment * 100.0) / 100.0;
25
26     printf("Principle: %.2f\n", principle);
27     printf("APR: %.4f%\n", apr*100.0);
28     printf("Months: %d\n", n);
29     printf("Monthly Payment: %.2f\n", monthlyPayment);
30
31     //for the first n-1 payments in a loop:
32     for(i=1; i<n; i++) {
33         // compute the monthly interest, rounded:
34         double monthlyInterest =
35             round( (balance * monthlyInterestRate) * 100.0) / 100.0;
36         // compute the monthly principle payment
37         double monthlyPrinciplePayment = monthlyPayment - monthlyInterest;
38         // update the balance
39         balance = balance - monthlyPrinciplePayment;
40         // print i, monthly interest, monthly principle, new balance
41         printf("%d\t%.2f  %.2f  %.2f\n", i, monthlyInterest,
42             monthlyPrinciplePayment, balance);
43     }
44
45     //handle the last month and last payment separately
46     double lastInterest = round( (balance * monthlyInterestRate) * 100.0) / 100.0;
47     double lastPayment = balance + lastInterest;
48
49     printf("Last payment = %.2f\n", lastPayment);
50
51     return 0;
52 }

```

Code Sample 17.8: Loan Amortization Program in C

18. Functions

As a procedural-style language, functions are essential in C programming. As we've already seen, C provides a large library of standard functions to perform basic input/output, math, and many other functions. C also provides the ability to define and use your own functions.

When you define functions in C, careful thought must be made as to the naming of your functions. This is because C does *not* support function overloading. When you name a function, that is the *only* function that can have that name. Consequently, you cannot, in general, use the same function names as defined in the standard libraries or any other 3rd party library that you would like to use in your programs.

C supports both call by value and call by reference using *pointers* (see Section 18.2). C also supports vararg functions (`printf()` being a prime example) and allows you to define vararg functions, but we will not cover them in depth here. Finally, parameters are not, in general, optional. For modern versions of C the omission of parameters is a syntax error. For older versions, complex rules dictate what happens when arguments are omitted, but doing so usually results in garbage.

18.1. Defining & Using Functions

For modern C, defining functions is a two step process. First, you *declare* the function by define the function signature using a *prototype*. Then later, you *define* the function by providing a function body that defines what the function does.

18.1.1. Declaration: Prototypes

Just as with variables, functions in C must be *declared* before they can be used. The modern way to declare a function in C is to use a *prototype* declaration which specifies the function's signature including its return type, identifier, and parameters. However, a prototype does *not* include the actual body of function. Instead, the function's *definition*, which includes the function body is included later in the program. Consequently, a prototype always ends with a semicolon.

Typically, the documentation for functions is included with the prototype but is *not* repeated with the function definition. This is a principle known as [Don't Repeat Yourself](#)

(DRY). Consider the following examples. In these examples we use a commenting style known as “doc comments.” This style was originally developed for Java but has since been adopted by many other languages.

```

1  /**
2   * Computes the sum of the two arguments.
3   */
4  int sum(int a, int b);
5
6  /**
7   * Computes the Euclidean distance between the 2-D points,
8   * (x1,y1) and (x2,y2).
9   */
10 double getDistance(double x1, double y1, double x2, double y2);
11
12 /**
13  * Computes a monthly payment for a loan with the given
14  * principle at the given APR (annual percentage rate) which
15  * is to be repaid over the given number of terms (usually
16  * months).
17  */
18 double getMonthlyPayment(double principle, double apr, int terms);

```

In each of these, the return type is the first thing specified. The function identifier (name) is then specified. Function names must follow the same naming rules as variables: they must begin with an alphabetic character and may contain alphanumeric characters as well as underscores. However, using modern coding conventions we usually name functions using lower camel casing.

Note again, each prototype ends with a semicolon. Further, prototypes do *not* specify what the function does, they only specify its signature. Later in the program, we can provide the actual definition of each function by using the following syntax. We repeat the signature, but instead of using a semicolon, we provide a code block, enclosed using opening/closing curly brackets, that specifies the function body. Here are the definitions from the prototype examples above:


```

1  int sum(int a, int b) {
2      return (a + b);
3  }
4
5  double getDistance(double x1, double y1, double x2, double y2) {
6      double xDiff = (x1-x2);
7      double yDiff = (y1-y2);
8      return sqrt( xDiff * xDiff + yDiff * yDiff);
9  }
10
11 double getMonthlyPayment(double principle, double apr, int terms) {
12     double rate = (apr / 12.0);
13     double payment = (principle * rate) / (1-pow(1+rate, -terms));
14     return payment;
15 }

```

The keyword `return` is used to specify the value that is returned to the calling function.

18.1.2. Void Functions

The keyword `void` can be used in C to indicate a function does *not* return a value, in which case it is called a “void function.” Though it is not necessary, it is still good practice to include a `return` statement.

```

1  //prototype:
2  void printCopyright();
3
4  //definition:
5  void printCopyright() {
6      printf("(c) Bourke 2015\n");
7  }

```

In the example above, we’ve also illustrated how to define a function that has no inputs. Some sources may include an explicit `void` keyword as a parameter to indicate the function takes no parameters as in `void printCopyright(void);`.

18.1.3. Organizing Functions

The separation of a declaration (prototype) and a function definition provides a natural way to organize functions in C. We place prototypes into a *header* file which has a file extension `.h` and then place the corresponding function definitions into a *source* file with the usual file extension, `.c`.

We’ve seen this before with the standard libraries: we use `#include<math.h>` to

“include” the math library’s header file in our code. This essentially brings in the math library function prototypes so that we can write calls to, say, `sqrt()` or `sin()`. Only when we compile do we actually need to *link* our code to the function definitions.

When we separate prototypes into header files and definitions into source files we also need to “include” the prototypes in our source file just as we would need to include them in any other file in which we use one of the functions. Suppose our functions above have their prototypes in a file named `utils.h` and their definitions in a file named `utils.c`. In the `utils.c` source file we would typically use the following syntax to include the header file:

```
#include "utils.h"
```

We use the double quote syntax with user-defined libraries while the usual less-than/greater-than syntax is used with standard libraries. With the less-than/greater-than syntax, the compiler will usually attempt to look for the header file(s) in a specified system directory which it will fail to find if it is a user-defined library.

Furthermore, other elements are usually included in header files such as preprocessor directives and other declarations (such as enumerated types and structures which we introduce later).

18.1.4. Calling Functions

Once a function has been defined, or at least a prototype has been brought into scope via an `#include` statement, you can write code to call your function(s). The syntax for doing so is to simply provide the function name followed by parentheses containing values or variables to pass to the function. Some examples:

```
1  int a = 10, b = 20;
2  int c = sum(a, b); //c contains the value 30
3
4  //invoke a function with literal values:
5  double dist = getDistance(0.0, 0.0, 10.0, 20.0);
6
7  //invoke a function with a combination:
8  double p = 1500.0;
9  double r = 0.05;
10 double monthlyPayment = getMonthlyPayment(p, r, 60);
```

By default, all primitive types including `int`, `double`, and `char` are passed by value. Function arguments are passed by value. To be able to pass arguments by reference, we need to use *pointers*.

18.2. Pointers

Consider the following line of C code.

```
int a = 10;
```

This line creates an integer variable and sets it equal to 10. In more detail, this line creates a spot in memory (typically 32 bits) and stores a binary representation of the value 10 at that location. In many instances, we don't care *where* the variable is stored in memory. However, we may have need to communicate that memory location to other functions. To do so, we can use *pointers*.

A **pointer** in C is a reference to a memory location. Because different types (**int**, **double**, **char**) take a different amount of memory, it is necessary to have a pointer for each type. That is, a pointer that points to a memory location that stores an **int** or a pointer that points to a memory location that stores a **double**, etc.

The syntax for declaring a pointer is to use an asterisk.

```
1 //regular variable declarations
2 int a;
3 double b;
4
5 //pointer variable declarations
6 int *ptrA;
7 double *ptrB;
```

If **ptrA** represents a memory location, what values can it take on? At the end of the day, a memory location is just a number, so you *could* do something like the following.

```
ptrA = 10;
```

Though syntactically this makes sense (and generally the compiler will let you do this with perhaps at most a warning), it's not really what you want. This assigns to the pointer variable **ptrA** the value 10, which will be interpreted as the *memory address* 10. This memory address may not belong to your program, or it may not even exist as a valid memory address. Attempts to access the value stored at an arbitrary memory location may be illegal and may result in the operating system killing the program with a **segmentation fault** or similar error.

There are many reasons why a program should not be allowed access to arbitrary memory locations, but one of the prime reasons is security. Imagine if the operating system allowed a program access to any part of memory; in particular memory that contained sensitive information such as passwords or secret **Secure Sockets Layer (SSL)** keys. To prevent this, operating systems generally only allow a program to access its own memory.

Referencing Operator

So how do we assign a valid value to a pointer? We do so using a *referencing operator*. Given a normal variable as above, we place an ampersand in front of it to get the memory address of the variable. For example:

```
1 ptrA = &a;
2 ptrB = &b;
```

The operation `&a` gets the memory address of the variable `a` and we can assign it to a pointer value. Again, note that the pointer type and variable type should match. making a `double` pointer point to an `int` variable type such as

```
ptrB = &a;
```

is valid syntax, but since the two types use different amounts of memory you may get garbage results.

There is a special value used in C called `NULL` which is a (case-sensitive) keyword used for uninitialized, undefined, empty or otherwise invalid or meaningless value. In the context of memory locations, `NULL` “points” to nothing. As with regular variables, its best practice to initialize pointer values to `NULL`. For example,

```
int *ptrA = NULL;
```

Without an initialization, the pointer may point to a random memory address which may be dangerous to attempt to access. You can also test whether or not a pointer points to `NULL` using the usual equality operator.

```
1 int *ptrA = NULL;
2 ...
3 if(ptrA == NULL) {
4     printf("Error: invalid memory location\n");
5 }
```

Dereferencing Operator

Once we have a valid pointer to a memory location, we may want to manipulate the contents of the memory it references. To do this we use the inverse operator, the *dereferencing operator* which again uses an asterisk. Given a pointer variable `ptrA`, we apply an asterisk in front of it to turn it into a regular variable. Consider the following example.

```

1 //declare a normal integer variable
2 int a = 10;
3 //declare a pointer and initialize it to NULL
4 int *ptrA = &a;
5
6 //point ptrA to a's memory location
7 ptrA = &a;
8
9 //change the value of the variable a using its pointer
10 *ptrA = 20;
11
12 //now the variable a has a value of 20:
13 printf("a = %d\n", a); //prints "a = 20"

```

How each of these lines of code operate in memory is depicted in Figure 18.1.

18.2.1. Passing By Reference


Now that we have the ability to reference a memory location using pointers, we can write functions that pass variables by reference. To do so, we use the same asterisk syntax used with pointer variables.

```

1 //prototypes
2 /**
3  * This function sums the first two variables (passed by
4  * value) and places the result into the third variable
5  * (passed by reference).
6  */
7 void sum(int a, int b, int *c);
8
9 /**
10  * This function swaps the values stored in the
11  * two variables passed by reference.
12  */
13 void swap(int *a, int *b);


```

In the function definitions, we can use the dereferencing operator to access or modify the value stored in the variable pointed to by the pointer.

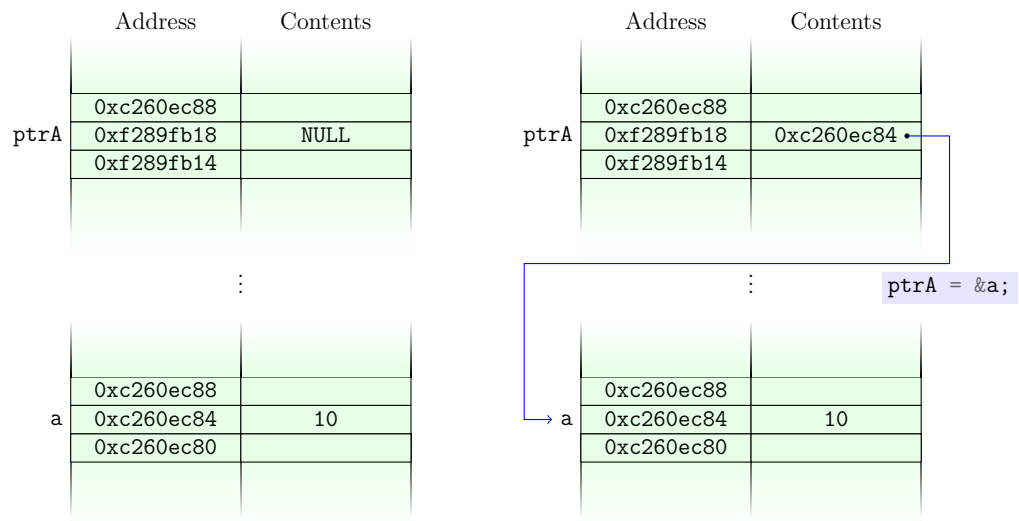

(a) After the first two lines memory has been dedicated for the variable **a** and the pointer variable **ptrA** and their values have been initialized.

(b) Making **ptrA** point to the variable **a**'s memory location. The value stored in the variable **ptrA** is a memory address.

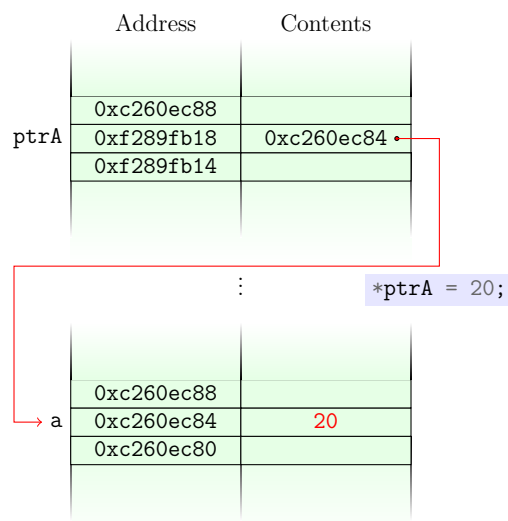

(c) Dereferencing **ptrA** and assigning a value changes the value stored at what it *points* to.

Figure 18.1.: Pointer Operations. Pointers can be made to point to other variable's memory locations. You can manipulate/access values of variables via their pointers using dereferencing.

```

1 void sum(int a, int b, int *c) {
2     int x = a + b;
3     *c = x;
4     return;
5 }
6
7 void swap(int *a, int *b) {
8     int temp = *a;
9     *a = *b;
10    *b = temp;
11    return;
12 }

```

To invoke these functions, we need to pass pointers to the functions appropriately. We could do this by creating pointer variables or using the referencing operator directly.

```

1 int x = 10;
2 int y = 20;
3 int c;
4 int *ptrC = &c;
5 sum(x, y, ptrC);
6 //at this point c contains the value 30
7
8 swap(&x, &y);
9 //at this point, the values in x and y have been swapped
10 // x contains 20 and y contains 10

```

This should look familiar. We saw this same syntax when we used `scanf()` to read input from the standard input. We needed to place an ampersand in front of each variable in order to pass the variable by reference so that `scanf()` could place the results into the respective memory locations. If the variables had been passed by value, then `scanf()` would not have been able to manipulate their values.

You can also specify functions to *return* pointers which we discuss in detail in [Chapter 20](#).

18.2.2. Function Pointers

Functions are just pieces of code that reside somewhere in memory just as variables do. Since we can create pointers that point to variables, it makes sense to be able to create variables that point to functions too! These are referred to as *function pointers*.

The syntax for declaring function pointers is similar to variable pointers. However, since a function's signature involves a return type and parameter list, these need to be specified. For example, suppose we wanted to create a function pointer that could point to the

18. Functions

math library's `sqrt()` function which takes a single `double` parameter and returns a `double` value.

```
double (*ptrToSqrt)(double) = NULL;
```

The above line creates a function pointer that can point to any function that takes a single `double` parameter and returns a `double` value. As is good practice, we've initialized it to point to `NULL`. The function pointer itself is named `ptrToSqrt`. To make it point to the `sqrt()` function we can use the following syntax.

```
ptrToSqrt = sqrt;
```

This is because a function's identifier acts as a pointer as well! Once we have a pointer to a function, we can invoke the function via its pointer as we would any other function call.

```
double x = ptrToSqrt(2.0);
```

Some more examples:

```
1 //this pointer can point any function that takes
2 //three arguments: an int, double, and a char
3 //and returns an int value
4 int (*ptrToFunc)(int, double, char)= NULL;
5
6 double x;
7 double (*ptr)(double) = NULL;
8 //we can make it point to sqrt:
9 ptr = sqrt;
10 x = ptr(2.0); //x contains 1.4142...
11 //or we can make it point to fabs
12 ptr = fabs;
13 x = ptr(-10.5); //x contains 10.5
```

You generally want to create and use function pointers when passing and returning functions as arguments to other functions as callbacks. We discuss this in further detail in Chapter ??.

18.3. Examples

18.3.1. Generalized Rounding

Recall that the standard math library provides a `round()` function that rounds a number to the nearest whole number. Often, we've had need to round to cents as well. We now have the ability to write a function to do this for us. Before we do, however, let's

think more generally. What if we wanted to round to the nearest tenth? Or what if we wanted to round to the nearest 10s or 100s place? Let's write a general purpose rounding function that allows us to specify *which* decimal place to round.

The most natural input values would be to specify the place using an integer exponent. That is, if we wanted to round to the nearest tenth, then we would pass it -1 as $0.1 = 10^{-1}$, -2 if we wanted to round to the nearest 100th, etc. On the positive end passing in 0 would correspond to the usual round function, 1 to the nearest 10s spot, and so on.

Moreover, we could demonstrate good code reuse (as well as procedural abstraction) by *scaling* the input value and reusing the functionality already provided in the math library's `round()` function. We could further define a `roundToCents()` function that used our generalized round function.

Let's also think about organization. We could place the prototypes into a `round.h` header file and the corresponding definitions in a `round.c` source file. The contents of these two files are presented here:

```

1  /**
2   * Rounds to the nearest digit specified by the place
3   * argument. In particular to the (10place)-th digit
4   */
5  double roundToPlace(double x, int place);
6
7  /**
8   * Rounds to the nearest cent
9   */
10 double roundToCents(double x);

```

```

1  #include<math.h>
2  #include "round.h"
3
4  double roundToPlace(double x, int place) {
5      double scale = pow(10, -place);
6      double rounded = round(x * scale) / scale;
7      return rounded;
8  }
9
10 double roundToCents(double x) {
11     return roundToPlace(x, -2);
12 }

```

Observe that neither of these files contains a `main()` function. By themselves they would not be able to be compiled into an executable program. We've essentially built a small *library* of rounding functions. We could compile them though into a binary *object*

file using gcc (something like `gcc -c round.c`). We could then link into the object file when compiling an executable program that uses these functions.

18.3.2. Quadratic Roots

Another advantage of passing variables by reference is that we can “return” multiple values with one function call. Functions are limited in that they can only return at most one value. But if we pass multiple parameters by reference, the function can manipulate the contents of them, thereby communicating (though not strictly returning) multiple values.

Consider again the problem of computing the roots of a quadratic equation,

$$ax^2 + bx + c = 0$$

using the quadratic formula,

$$\frac{-b \pm \sqrt{b^2 - 4ac}}{2a}$$

Since there are two roots, we may have to write two functions, one for the “plus” root and one for the “minus” root both of which take the coefficients, a, b, c as arguments. However, if we wrote a single function that took the coefficients as parameters by value as well as two other parameters by reference, we could place *both* root values, one in each of the by-reference variables.

```

1 void quadraticRoots(double a, double b, double c,
2                     double *root1, double *root2) {
3     double discriminant = sqrt(b*b - 4*a*c);
4     *root1 = (-b + discriminant) / (2*a);
5     *root2 = (-b - discriminant) / (2*a);
6     return;
7 }
```

By using pass by reference variables, we avoid multiple functions. We also note that the return value in this case is unused since we are “returning” the root values in the two pass-by-reference variables. This frees up the return value to be used to communicate *errors* to the calling function. Recall that there could be several “bad” inputs to this function. The roots could be complex values, the coefficient a could be zero, etc. And now that we are dealing with pointers, the pointers could be invalid (point to `NULL`). In the next chapter, we examine how we can use the return value to communicate different errors to the calling function, letting it *handle* those errors.

19. Error Handling

The C language does not support exceptions or exception handling. Instead, the usual method of error handling is done through defensive programming. As a user, it is your responsibility to write code that checks for invalid or unsafe operations before executing them and handle the error appropriately.

One way that we've already seen to handle errors in C is to use the `exit()` function in the standard library. This function immediately terminates the execution of our program and "returns" an integer valued "exit code." This exit code can be used to communicate errors between different processes. The process that executed the program can use it to determine if the program exited with or without an error. By convention, 0 indicates an error while a non-zero value indicates an error. Using the `exit()` function should only be done when an error should be considered *fatal* or severe enough that the program should immediately terminate.

19.1. Language Supported Error Codes

In the standard libraries, some functions are designed to indicate an error by returning a special "flag" value such as `-1` or `NULL`. In general, though, the standard library functions communicate an error code represented as an integer value. As previously mentioned, C uses the convention that 0 indicates "no error" while a non-zero value indicates an error.

Error codes are communicated through a special global variable called `errno` which is defined in the `errno.h` standard header file. This header file also defines several macros that are identified with various error codes. The C standard actually only requires the following three error codes to be supported.

- `EDOM` indicates an error in the *domain* of a function; that is, an error with respect to the function's input value(s). For example, calling the math library's `sqrt(-1)` on a negative value results in an `EDOM` error as C does not support complex numbers.
- `ERANGE` indicates an error in the *range* of a function; that is, an error with respect to the function's output value(s). For example, calling the math library's `log(0)` with a zero value results in an `ERANGE` error as C does not support $-\infty$ as an actual number.

- `EILSEQ` indicates an illegal byte sequences in characters on systems that use UTF-8.

All three of these are defined in the `errno.h` header file. Depending on the system, additional error codes may also be defined and supported (see POSIX Error Codes below).

When an error occurs, a function will set the global variable `errno` to one of these error code values. Upon returning from a function, you can check for these error codes. Since these error codes are represented as integers, you simply use the numerical comparison operator, `==`. You can check for no error by making a comparison to zero.

In addition, the standard string library, `string.h` provides a function, `char * strerror(errno)` that can be used to map the value in `errno` to a human-readable error message. We discuss strings in detail later on, but we can see how to use this function in the following demonstration (see below). The output of this program is as follows.

```
result: 1.4142, error: 0
result: -nan, error: 33
it was an EDOM error
Error Message: Numerical argument out of domain
result: -inf, error: 34
it was an ERANGE error
Error Message: Numerical result out of range
```

For this particular system, the `EDOM` and `ERANGE` error codes were associated with the integer values 33 and 34 respectively. These numbers are not necessarily the same on all systems so comparisons must be made against the macro names for portability.

```

1  #include<stdio.h>
2  #include<stdlib.h>
3  #include<math.h>
4  #include<string.h>
5  #include<errno.h>
6
7  int main(int argc, char **argv) {
8
9      double a = -1, b = 2, c = 0.0;
10     double x;
11
12     //okay
13     x = sqrt(b);
14     printf("result: %.4f, error: %d\n", x, errno);
15
16     //NaN and EDOM error...
17     x = sqrt(a);
18     printf("result: %.4f, error: %d\n", x, errno);
19
20     //make a comparison
21     if(errno == EDOM) {
22         printf("it was an EDOM error\n");
23     }
24
25     //error messages can be accessed via:
26     char *errMsg = strerror(errno);
27     printf("Error Message: %s\n", errMsg);
28
29     //ERANGE error
30     x = log(c);
31     printf("result: %.4f, error: %d\n", x, errno);
32
33     if (errno == ERANGE) {
34         printf("it was an ERANGE error\n");
35     }
36
37     //error messages can be accessed via:
38     errMsg = strerror(errno);
39     printf("Error Message: %s\n", errMsg);
40
41     return 0;
42 }
43

```

19.1.1. POSIX Error Codes

POSIX is an IEEE set of standards for maintaining compatibility between various operating systems. It defines several rules and expectations that operating systems must adhere to in order to be POSIX *compliant*. Such standards allow developers to develop code that should be interoperable among a collection of different operating systems, reducing the need for rewrites and reimplementations for different systems.

In particular, POSIX compliant systems define many other error codes (see [3]) that can be used beyond the three mentioned above. For example, the ENOENT error code corresponds to “No such file or directory” and EACCES corresponds to a “Permission denied” error.

19.2. Error Handling By Design

In our own code we *could* communicate errors to calling functions by setting `errno`, however, we may run into compatibility issues with the standard error codes or POSIX error codes. Instead, it may be more appropriate to do error handling by utilizing the return value of a function to communicate an error code.

That is, to do error handling we could design our functions to always return an `int` value to indicate an error: 0 for no error and some non-zero value to indicate various different types of errors. Of course, as a consequence any value that needs to be “returned” to the calling function would need to be done so via a pass by reference variable.

As an example, let’s revisit the quadratic roots example in Section 18.3.2. By returning the two output values via pass by reference variables, we freed up the return value. We can now modify our function to return an integer indicating an error code instead.

Previously we had identified several different types of errors: division by zero (if $a = 0$), complex roots (if $b^2 - 4ac < 0$) and a `NULL` pointer error if the variables passed by reference were `NULL`. We can now modify our function to check for these errors and return an appropriate error code. We return zero in the event that no error was encountered.

```

1  int quadraticRoots(double a, double b, double c,
2                      double *root1, double *root2) {
3      if(a == 0) {
4          return 1;
5      } else if( b*b - 4*a*c < 0 ) {
6          return 2;
7      } else if(root1 == NULL || root2 == NULL) {
8          return 3;
9      }
10     double discriminant = sqrt(b*b - 4*a*c);
11     *root1 = (-b + discriminant) / (2*a);
12     *root2 = (-b - discriminant) / (2*a);
13     return 0;
14 }

```

Now when a function invokes our `quadraticRoots()` it can check to see what kind of error code it returned and handle the error in whatever way it wants.

There is still an issue, however. The usage of the integers 1, 2, 3 to indicate the various errors was arbitrary. These are essentially *magic numbers* that the calling function would have to deal with by making comparisons with various integers. The numbers themselves are meaningless and someone using them would need to constantly refer to documentation to understand which integer corresponded to which error condition.

It would be much better if we could follow the strategy of the `errno` and define human-readable identifiers for each error code. We could accomplish this by defining macros, but another solution is to use an *enumerated type*.

19.3. Enumerated Types

C allows you to define *enumerated types* which allow you to define a fixed list of possible values. For example, the days of the week or months of the year are possible values used in a date. However, they are more-or-less fixed (no one will be adding a new day of the week or month any time soon). An enumerated type allows us to define these values using human-readable keywords (much like the `#define` macro).

To declare an enumerated type we use the keywords `typedef enum` (short for type definition and enumeration). We then provide a comma delimited list of keywords inside a code block. At the end of the code block we provide the type's identifier. That is, the name of the type itself. For example, the names of integer and floating-point types in C are `int` and `double` respectively. This identifier gives our type a name that we can later use to declare variables of that type. Consider the following example.

```

1  typedef enum {
2      SUNDAY,
3      MONDAY,
4      TUESDAY,
5      WEDNESDAY,
6      THURSDAY,
7      FRIDAY,
8      SATURDAY
9  } DayOfWeek;

```

In this example we've defined an enumeration of the days of the week. The name of the type itself is `DayOfWeek` and we can now declare variables of this type. The possible *values* it can take are `SUNDAY`, `MONDAY`, etc. and we can use these keywords in our program. For example,

```

1  DayOfWeek today = MONDAY;
2
3  if(today == SUNDAY || today == SATURDAY) {
4      printf("Its the weekend!\n");
5  }

```

Note the modern naming conventions: the type identifier uses upper camel casing while the enumerated values follow an upper case underscore convention. Though our example does not contain a value with multiple words, if it had, we would have used an underscore to separate them. Furthermore, enumerated type declarations are usually placed in separate header files along with function prototype declarations.

Care must be taken when using enumerated types, however. Internally, C simply associates integers with the values. Thus, in our example, `SUNDAY` is actually `0`, `MONDAY` is `1`, and `SATURDAY` is `6`. When we do assignments or equality comparisons, we're actually just comparing integers.

Consequently, a `DayOfWeek` variable *may* be assigned values that do not correspond to our enumeration. For example,

```
DayOfWeek today = 1000;
```

is valid code and will not (in general) result in any compiler errors or warnings, even though it is assigning an invalid value to the variable. Care must be taken to only assign valid values to an enumerated type variable. Proper error checking should also be done.

Despite this limitation, using enumerated types in C provides an obvious advantage. Without an enumerated type we'd be forced to use a collection of *magic numbers* to indicate values. Even for something as simple as the days of the week we'd be constantly trying to remember: which day is Wednesday again? I forget, do our week start with Monday or Sunday? Etc. By using an enumerated type these questions are mostly moot as we can use the more human-readable keywords and eliminate the guess work.

19.4. Using Enumerated Types for Error Codes

Let's apply enumerated types to our `quadraticRoots()` function example from before. First, we define our enumerated type which includes all types of errors including a `NO_ERROR` type. Note that we start with `NO_ERROR` as its value will be zero following our convention.

```
1 typedef enum {
2     NO_ERROR,
3     DIV_BY_ZERO_ERROR,
4     COMPLEX_ROOT_ERROR,
5     NULL_POINTER_ERROR
6 } ErrorCode;
```

Now in the `quadraticRoots()` function, we can return the appropriate error code.

```
1 ErrorCode quadraticRoots(double a, double b, double c,
2                          double *root1, double *root2) {
3     if(a == 0) {
4         return DIV_BY_ZERO_ERROR;
5     } else if( b*b - 4*a*c < 0 ) {
6         return COMPLEX_ROOT_ERROR;
7     } else if(root1 == NULL || root2 == NULL) {
8         return NULL_POINTER_ERROR;
9     }
10    double discriminant = sqrt(b*b - 4*a*c);
11    *root1 = (-b + discriminant) / (2*a);
12    *root2 = (-b - discriminant) / (2*a);
13    return NO_ERROR;
14 }
```


20. Arrays

C allows you to declare and use arrays. Since C is statically typed, arrays must also be typed when they are declared and may only hold that particular type of element. C supports the use of both static arrays and dynamic arrays through standard library calls.

20.1. Basic Usage

To declare a static array, you use syntax similar to declaring a regular variable, but you use square brackets to designate the variable as an array. Within the square brackets you indicate the size (number of elements) in the array. For example,

```
1 int arr[5];  
2 double values[10];
```

The two declarations above create arrays of size 5 and 10 respectively. The array types are also defined using the usual keywords. In this case, `arr` can only hold `int` values and `values` can only hold `double` values. Arrays follow the same naming rules and conventions as regular variables. Many times, identifiers are made plural as an array naturally holds more than one value.

C99 introduced Variable Length Arrays (VLAs, which are also supported in GNU C89) which allow you to declare a static array whose size is determined by a variable. For example,

```
1 int n = 5;  
2 int arr[n];
```

or within a function,

```
1 void foo(int n) {  
2     int arr[n];  
3     ...  
4 }
```

In either case, care must be taken as static arrays are allocated on the stack. The stack is generally small and allocating even a moderately large array on the stack may lead to a stack overflow. In addition, VLAs are not supported in any C++ standard and should be avoided if portable code is desired.

20. Arrays

Another way to declare an array is to use the compound declaration and assignment syntax whereby you can initialize an array to hold a certain list of values.

```
1 int a[] = { 2, 3, 5, 7, 11 };
```

Using this syntax we do not need to specify the size of the array as the compiler is smart enough to count the number of elements we've provided. The elements themselves are denoted inside curly brackets and delimited with commas.

Indexing

Once an array has been created, its elements can be accessed by indexing. C uses the standard 0-indexing scheme so the first element is at index 0, the second at index 1, etc. Indexing an element involves using the square bracket notation and providing an index. Once indexed, an array element can be treated as a normal variable and can be used with other operators such as the assignment operator or comparison operators.

```
1 arr[0] = 42;
2 if(arr[4] < 0) {
3     printf("negative!\n");
4 }
5 printf("arr[1] = %d\n", arr[1]);
```

Recall that an index is actually an offset. The compiler and system know exactly how many bytes each `int` element takes and so an index `i` calculates exactly how many bytes from the first element the i -th element is located at. Consequently it is possible to index elements that are beyond the range of the array. For example, `arr[-1]` or `arr[5]` would attempt to access an element immediately *before* the first element and immediately *after* the last element. Obviously, these elements are not part of the array.

If these out-of-bound elements represent a memory space that does not belong to our program, then it is likely that a [segmentation fault](#) will occur and terminator our program as we've attempted to access or modify memory that does not belong to us. However, it is also likely that the memory space surrounding our array belongs to our program. Still, accessing those blocks of memory may not give us meaningful values and modifying them could corrupt other variable values or generally lead to *undefined behavior*. It is our responsibility as programmers to write code that does not go beyond the bounds of an array.

This begs the question, how can we keep track of the size of the array so that we do not access elements after the last element? With C the responsibility again falls to us, we must always have secondary variables that store the number of elements in an array. If we pass an array to a function (see below), we must also pass a “size” parameter so that the function knows how big the array is.

Iteration

C provides no foreach loop to iterate over an array. Instead, the most natural way to iterate over the elements is a normal for-loop that increments an index variable.

```

1  int i, n = 10;
2  int arr[n];
3  for(i=0; i<n; i++) {
4      arr[i] = 5 * i;
5  }
```

The for loop above initializes the variable `i` to zero, corresponding to the first element in the array. The continuation condition specifies that the loop continues while `i` is strictly less than the size of the array. This iteration for-loop is *idiomatic* when dealing with arrays.

20.2. Dynamic Memory

Recall that static arrays have many shortcomings (see Section 7.2). In general they should be avoided since stack space is limited and they cannot be returned from functions. Fortunately, C provides several standard library functions that facilitate the creation and management of dynamically allocated arrays.

The primary function to allocate memory is the `malloc()` function:

```
void * malloc(size_t size);
```

which takes a single parameter, the number of bytes that you wish to allocate. The type, `size_t` is an alias for an unsigned integer type, so you can think of it as an integer. Thus, `malloc(200)` would allocate 200 bytes and return a pointer to the memory space. In some instances, the allocation may fail. For example, if the program or system has run out of available memory or you simply request too much. In the event of a failure, `malloc()` returns a `NULL` pointer. The returned value can thus be checked to see if the allocation was successful.

We don't have to manually calculate how many bytes we need for an array of a particular size. There is a macro available, `sizeof()` that can be used to determine the number of bytes any type takes on a system. For example, `sizeof(int)` gives the number of bytes an `int` takes while `sizeof(double)` gives the number of bytes for a `double`, etc. Thus, if we want to allocate an array of 100 integers, we could call `malloc()` as

```
malloc(100 * sizeof(double));
```

Using `sizeof()` is actually preferable as some systems may use a different number of bytes for various types.

Finally, note the return type of `malloc()`: it's a *void pointer*. The `malloc()` function simply allocates chunks of memory. It doesn't care that you intend to use the memory to store integers or floating-point numbers. Thus, `malloc()` returns a "generic" pointer, simply an address in memory. Once we have that pointer we can treat it as an integer pointer, `int *` or a floating-point pointer, `double *` depending on what we want to store.

One way of doing this is to explicitly *cast* the void pointer as the pointer that we want. Some examples:

```
1 int *arr = NULL;
2 double *values = NULL;
3
4 arr = (int *) malloc(sizeof(int) * 10);
5 values = (double *) malloc(sizeof(double) * 100);
```

The pointer cast is just like when we casted `int` types as `double` types so that we could perform division without truncation. In this case, we convert the returned generic void pointer into a `int` pointer and `double` pointer respectively.¹

Once created, a dynamic array can be used just like a static array. You use the array's identifier as well as an index to access or modify each element. The same rules and pitfalls apply, so care must be taken to not access elements outside the bounds of the array. Finally, when using `malloc()` it is important to understand that the memory that is allocated is uninitialized. Just as with variables you cannot make any assumptions as to the contents of the memory space that is allocated. It may contain garbage values, it may contain the original contents that occupied the memory last time it was used, etc. A full example:

```
1 int n = 100;
2 int *arr = NULL;
3 arr = (int *) malloc(sizeof(int) * n);
4 if(arr == NULL) {
5     fprintf(stderr, "unable to allocate memory!\n");
6     exit(1);
7 }
8 for(i=0; i<n; i++) {
9     arr[i] = (i+1) * 10;
10    printf("a[%d] = %d\n", i, arr[i]);
11 }
```

There are other functions that can be used to allocate memory in C. For example,

¹Performing an explicit pointer cast is actually not necessary in C as the type system will do an implicit cast for us. Whether explicit or implicit types casts are "better" can evoke debates akin to nerd holy wars. Though there are advantages and disadvantages to both [13], we perform explicit pointer casts in this book as clarity and intent is more important than brevity. Even more important is that explicit pointer casts are *necessary* in C++ so doing so in our C code makes our code more portable.

`calloc()` is similar to `malloc()` but initializes the contents to zero (null bytes). `realloc()` can be used to resize an existing memory space (though it may fail if it cannot be expanded).

Deallocation

Once dynamically allocated memory is no longer needed, we should release it so that it can be reused by the program or the operating system. The `free()` function in the standard library does this for us. All we need to do is provide the pointer to `free()` and it deallocates the memory block.

```
1 free(arr);
```

Once freed, accessing old memory pointed to by the `arr` pointer is undefined behavior and may lead to unexpected or fatal results.

20.3. Using Arrays with Functions

Since arrays are represented using pointers, we can pass and return arrays to and from functions simply by passing in a pointer. When passing an array to a function, we also need to make sure that we communicate to the function the size of the array as there is no reliable way for the function to determine this. By passing both a pointer and an integer representing the size, we are implicitly indicating that we are passing an array and not just a single value.

As an example, the following function takes an array of integers and computes its sum.

```
1  /**
2   * This function computes the sum of elements in the
3   * given array which contains n elements
4   */
5  int computeSum(int *arr, int n) {
6      int i;
7      int sum = 0;
8      for(i=0; i<size; i++) {
9          sum += arr[i];
10     }
11     return sum;
12 }
```

In this example we had no need to make changes to any of the elements in the array. However, the array was still passed by reference, meaning we could have. When passing arrays, we can use the keyword `const` (short for constant) to explicitly indicate that no changes will be made to the array elements. For example,

```
int computeSum(const int *arr, int n)
```

This is enforced by the compiler: if we do attempt to make changes to a `const` array, it will be a compiler error.

We can also create an array in a function and return it as a value. As previously discussed, we will need to do so by creating a dynamically allocated array. For example, the following function creates a **deep copy** of the given integer array. That is, a completely new array that is a distinct copy of the old array. In contrast, a **shallow copy** would be if we simply made one reference point to another reference.

```

1  /**
2   * This function creates a new copy of the given integer
3   * array which contains n elements and returns a pointer
4   * to the new copy.
5   */
6  int * makeCopy(const int *a, int n) {
7      int *copy = (int *)malloc(sizeof(int) * n);
8      int i;
9      for(i=0; i<n; i++) {
10         copy[i] = a[i];
11     }
12     return copy;
13 }
```

The function returns an integer pointer. Here we have a similar problem with respect to the size of the array. We only have one return value, which must be the pointer. In this particular example the calling function knows how big the array is because it specified the size by passing in `n`. In general we could have communicated the size of the returned array through another passed by reference integer variable.

20.4. Multidimensional Arrays

C supports multidimensional arrays both static and dynamically allocated; though we'll only focus on dynamically allocated 2-dimensional arrays. Conceptually, a 2-dimensional array of, say, integers can be modeled as an array of pointers that point to an array of integers. That is, a pointer to pointers, for example, `int **`. The initial pointer points to an array of integer points, `int *` and each integer pointer points to an array of `int` variables.

To understand this better, let's look at the details of allocation. Consider the following code.


```

1  int i;
2  int **myMatrix = NULL;
3  myMatrix = (int **)malloc(n * sizeof(int*));
4  for(i=0; i<n; i++) {
5      myMatrix[i] = (int *)malloc(n * sizeof(int));
6  }

```

Line 3 invokes `malloc()` to create an array of n integer pointers, that is `int *` types. We then go into a loop to iterate over each of these pointers and invoke `malloc()` again to setup each array. This process is visualized in Figure 20.1. Note the syntax: when we invoke `malloc()` to create an array of pointers, we use `sizeof(int*)` to determine how many bytes each integer *pointer* takes. We also do an explicit type cast of `(int **)` to match our pointer-to-pointer(s) variable `myMatrix`.

Once the allocation has completed, we can treat `myMatrix` as a normal 2-dimensional array and index each element with two index variables.

```

1  int i, j;
2  for(i=0; i<n; i++) {
3      for(j =0; j<n; j++) {
4          myMatrix[i][j] = 0;
5      }
6  }

```

To deallocate and free multidimensional arrays, we need to work backwards. If we immediately freed the pointer-to-pointers, `free(myMatrix);`, we would lose all references to the individual array “rows” and would not be able to free them, resulting in a [memory leak](#). We need to free up each row first, *then* we can free the pointer-to-pointers.

```

1  for(i=0; i<n; i++) {
2      free(myMatrix[i]);
3  }
4  free(myMatrix);


```

20.4.1. Contiguous 2-D Arrays


The example depicted in Figure 20.1 constructs a two dimensional array. However, each “row” of the array was created using an independent call to `malloc()` which may result in non-contiguous memory blocks (each row may not be located in the memory address immediately following the previous row). In general, this is not a problem for most situations (we can expect most implementations of `malloc()` to be efficient). However, it might be better in some scenarios if the two dimensional array were all one big block of contiguous memory.

We can achieve this by a single call to `malloc()` and some clever pointer manipulation.


20. Arrays




(a) Initialization of the pointer-to-pointers. The first invocation of `malloc()` sets up an array of integer pointers, `int *` that are uninitialized (where they point to is undefined).

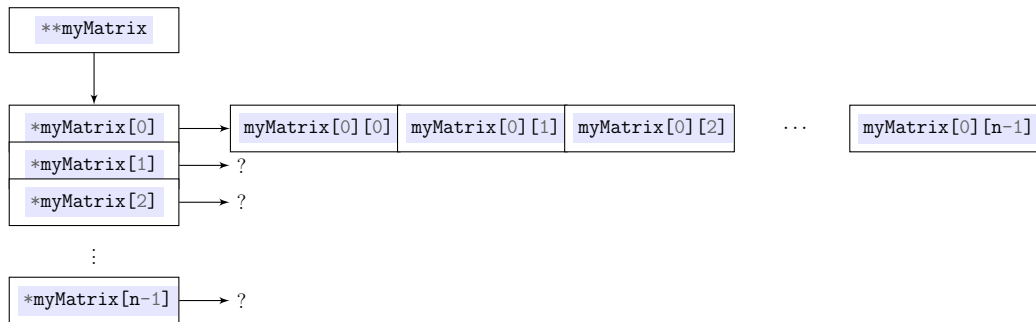

(b) Initialization of the first pointer. On the first iteration of the `for` loop when `i = 0`, the first “row” is initialized when `malloc()` is invoked.

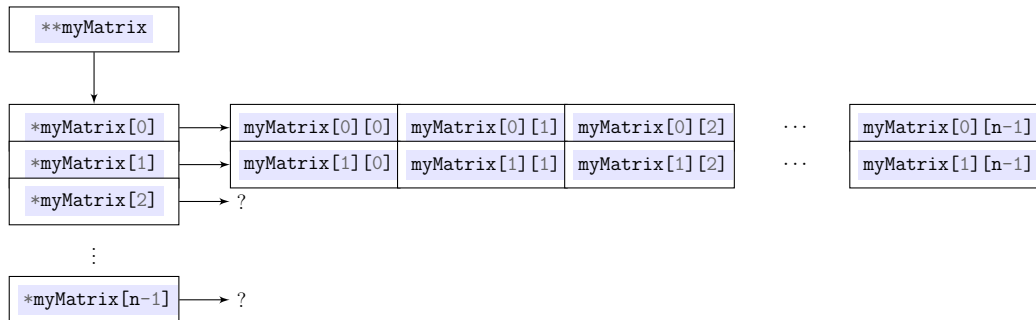

(c) Initialization of the second pointer. On the second iteration of the `for` loop when `i = 1`, the second “row” is initialized.

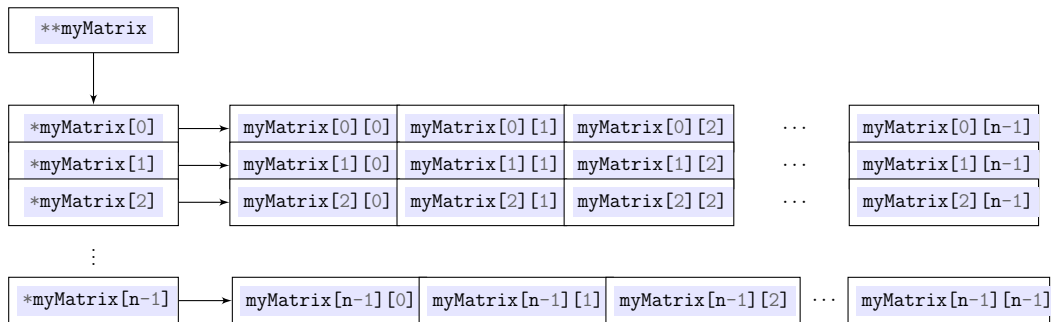

(d) After the termination of the `for` loop, each row has been initialized and the pointer-to-pointers can be treated like a 2-dimensional array.

Figure 20.1.: The process of dynamically allocating a 2-dimensional array of integers using `malloc()` in a `for`-loop.

We do this very similar to the previous example. Our first call to `malloc()` to set up the pointer-to-pointers is the same. However, instead of calling `malloc()` over and over in a for loop, we make one single call asking for a number of bytes to accommodate the entire $n \times m$ array. We then store the result at the “beginning” of the array (at index zero).

```
1 int n = 5, m = 3, i, j;
2
3 int **arr = (int **)malloc(sizeof(int *) * n);
4 arr[0] = (int *)malloc(sizeof(int) * (n * m));
```

We’re not done yet, however. We still need to initialize all of the other pointers. To do so, we dereference the array (once) to get the address of the start of the memory block and then compute an *offset* from this beginning on where the next “row” should be. Since each row has `m` elements, this arithmetic is simple.

```
1 for(i=1; i<n; i++) {
2     arr[i] = (*arr + (m * i));
3 }
```

Now we can treat the array like we would any other two dimensional array by specifying two indices.

```
1 for(i=0; i<n; i++) {
2     for(j=0; j<m; j++) {
3         arr[i][j] = 10 * i + j;
4     }
5 }
```

Which would result in an array that, conceptually, looks something like the following.

```
[ 0  1  2 ]
[ 10 11 12 ]
[ 20 21 22 ]
[ 30 31 32 ]
[ 40 41 42 ]
```

20.5. Dynamic Data Structures

The C standard library does not provide a variety of advanced, dynamic data structures such as linked lists or sets. As of C89 and POSIX.1 the C standard library does provide hash tables and binary search trees, but does not require implementations of other dynamic data structures. Instead, you must either implement your own or utilize a third-party library such as glibc, the GNU C library (<http://www.gnu.org/software/libc/>).

21. Strings

C has no built-in string type. Instead, strings are represented as arrays of `char` elements. They differ from, say arrays of `int` or `double` types, however in that they are *null terminated* arrays. The end of the string must *always* be denoted with a null-terminating character, `'\0'` (the 0 valued character in the [ASCII](#) table). Failure to properly null-terminate a string may lead to undefined behavior or fatal errors.

C provides a good variety of functions in its standard string library (included in the `string.h` header). All of these functions operate under the assumption that the strings passed to it are null-terminated, thus its your responsibility to ensure that they are. Moreover, some of the functions that operate on strings will inset the null-terminating character for us, but others will not. Thus, its important to understand the expectations and guarantees of each function.

TODO: figure depicting a string array

21.1. Character Arrays

We've previously used string literals when using the standard input and output functions, `printf()` and `scanf()`. You can also create static strings (as static arrays) using the standard assignment operator. Some examples:

```
1 char firstName[] = "Tom";  
2 char lastName[] = "Waits";
```

This syntax can only be used when creating static strings (they are allocated on the stack and locally scoped). The compiler is able to scan the string literal and determine how many characters are needed and even inserts the null-terminating character for us. Thus, the length of the two strings in the example are 3 and 5 respectively, but the array size created for them will be 4 and 6 respectively to accommodate the null-terminating character.

Static strings have the same limitations as static arrays. Since they are allocated on the stack, they cannot, for example, be returned from a function. Just as with `int` and `double` types, however, we can dynamically allocate memory to hold `char` types using `malloc()`. The important difference being that we need to always allocate at least one more character to accommodate the null-terminating character.

21. Strings

```
1 char *fullName = NULL;
2 fullName = (char *) malloc(sizeof(char) * 10);
```

This example creates a dynamically allocated `char` array that is able to hold 9 characters (since one will be needed for the null-terminating character). However, once we have created the array, we cannot simply assign an entire string to it using the usual assignment operator.

```
1 //THIS IS *WRONG*:
2 fullName = "Tom Waits";
```

This will compile, but doesn't give us what we want. Recall that `fullName` is a character pointer. Using the assignment operator simply makes it *point* to the static, literal string `"Tom Waits"`. In fact, we lose our reference to the dynamically allocated array that was created with `malloc()`, giving us a *memory leak*.

Instead, we need to use a function in the standard library to *copy* a string. The function in the standard library that allows you to copy strings is as follows.

```
char *strcpy(char *dest, const char *src);
```

The name, `strcpy` is short for “string copy.”¹ Both arguments are character pointers. In keeping with the use of the assignment operator, the second argument (“source”) is copied into the first, “destination” (just as with an assignment operator, the value on the right-hand-side is copied into the variable on the left-hand-side). Moreover, the second argument has been marked as `const` indicating that it will not be changed. The contents of the first argument *will* be changed since we are copying a string into it, erasing whatever contents it had prior. Finally, the function returns a pointer to the `dest` argument, mostly so that it can be used in nested function calls (though we'll avoid such confusingly terse “tricks”). From our example:

```
1 //“assign” (copy) “Tom Waits” into the string fullName:
2 strcpy(fullName, "Tom Waits");
```

In addition, we can access and modify individual characters in a string using the usual indexing and assignment operator with `char` literals.

¹The abbreviations are mostly historic: in the 70s and 80s when memory was measured in kilobytes, saving a few characters made a significant difference.

```

1 //access individual characters:
2 char firstInitial = fullName[0]; //'T'
3 char lastInitial = fullName[4]; //'W'
4
5 //printing:
6 printf("First Initial: %c\n", fullName[0]);
7
8 //modifying:
9 firstInitial[0] = 't';
10 firstInitial[4] = 'w';
11 //fullName is now "tom waits"

```

21.2. String Library

The standard string library provides many other convenient functions that allow you to process and modify strings. We highlight a few of the more common ones here. A full list of supported functions can be found in standard documentation.

Length

Like with regular arrays, we are responsible for ensuring that we do not access characters outside the character array of a string. However, since a string is null-terminated, there is a nice function provided by the string library to determine its length,

```
size_t strlen(const char *s);
```

Recall that `size_t` can essentially be treated as an integer, indicating the number of bytes in the passed string. Since a character is a single byte, this function tells us how many character are in the given string *not including* the null-terminating string. This function, too is an abbreviation for “string length.”

Using this function we can easily iterate over each character in a string.

```

1 int i;
2 for(i=0; i<strlen(fullName); i++) {
3     printf("fullName[%d] = %c\n", i, fullName[i]);
4 }

```

Concatenation

A concatenation function is provided that allows you to append one string to the end of another.

```
char *strcat(char *dest, const char *src);
```

21. Strings

Similar to the `strcpy()` function, `strcat()` appends the “source” (`src`) string to the end of the “destination” (`dest`) string. Note that it is *your* responsibility to ensure that the destination string is large enough to accommodate the source string. If it is not, then it could lead to undefined behavior as `strcat()` overwrites memory after the end of the destination string. Further, `strcat()` will copy the null-terminating character for you so that the resulting string (now stored in `dest`) is valid.

```
1 char *formattedName = (char *)malloc(11 * sizeof(char));
2 //copy "Waits" into formattedName
3 strcpy(formattedName, lastName);
4 //append a ", " to formattedName
5 strcat(formattedName, ", ");
6 //append the firstName to the formattedName
7 strcat(formattedName, firstName);
8 //formattedName now contains "Waits, Tom"
```

Byte-Limited Versions

C also provides several *byte-limited* versions of the copy and concatenation functions:

```
char *strncpy(char *dest, const char *src, size_t n);
```

```
char *strncat(char *dest, const char *src, size_t n);
```

They work similarly in that they copy/concatenate the source, `src` string into the destination, `dest` string. However, there is a third parameter, `n` which specifies *at most* how many bytes to copy/concatenate. The parameter, `n` allows you to limit the number of characters that the operation uses. If either of these functions encounters the null-terminating character before `n` bytes have been copied/concatenated, they stop and copy the null-terminating character for us.

However, these functions do not always handle the null-terminating character for us. If the null-terminating character appears in the first `n` bytes, it will be copied for us, but if it is not, we need to be sure to handle it ourselves.

For example,

```
1 char email[] = "twaits@cse.unl.edu";
2 char *login = (char *) malloc(7 * sizeof(char));
3
4 //only copy the first 6 characters:
5 strncpy(login, email, 6);
6 //at this point, login contains "twaits" but is
7 //not null-terminated, so we manually terminate it
8 login[6] = '\0';
```


Computing a Substring

The byte-limited versions of the copy function can be used to compute a substring of another string. The parameter `n` can be used to limit the length of the string, but how might we specify where the substring should start?

For example, in the string `"Thomas Alan Waits"` we may want to get the substring representing his middle name, `"Alan"`. The length is 5 (four characters and the null-terminating character) and we can specify that the copying should start by using an index. In this case, we want the copying to start at index `7`, the 8th character. If the string is stored in an array named `name`, this would be `name[7]`. However, indexing an array like this results in a single character and `strncpy()` expects a string (a character *pointer*). Fortunately, we know how to do this: using the referencing operator, we can turn the 8th character into a character pointer, `&name[7]`. A full example:

```
1 char name[] = "Thomas Alan Waits";
2 char *middleName = (char *) malloc(sizeof(char) * 5);
3 strncpy(middleName, &name[7], 5);
4 //middleName now holds "Alan"
```

21.3. Arrays of Strings

We often need to deal with collections of strings. An array of strings can be viewed as a 2-dimensional character array. Indeed, we've seen this before. In the typical C program's `main()` function, command line arguments are passed as the second parameter:

```
int main(int argc, char **argv)
```

which is represented as a double character pointer, `char **`. Conceptually, each row is a string, `char *`. The first parameter, `argc` indicates how many rows there are. The `main()` function doesn't need to be told how big each "row" is since strings are null-terminated.

We can create our own arrays of strings similar to how we created 2-dimensional arrays of `int` and `double` types.

21. Strings

```
1 //create an array that can hold 5 strings
2 char **names = (char **) malloc(5 * malloc(sizeof(char*)));
3 int i;
4 for(i=0; i<5; i++) {
5     //each string can hold at most 19 characters
6     names[i] = (char *) malloc(sizeof(char) * 20);
7 }
8 strcpy(names[0], "Margaret Hamilton");
9 strcpy(names[1], "Ada Lovelace");
10 strcpy(names[2], "Grace Hopper");
11 strcpy(names[3], "Marie Curie");
12 strcpy(names[4], "Hedy Lamarr");
```

21.4. Comparisons

When comparing strings in C, we cannot use the numerical comparison operators such as `==`, or `<`. Because strings are represented as arrays, using these operators actually compares the variable's *memory addresses*.

```
1 char *a = (char *) malloc(sizeof(char) * 13);
2 char *b = (char *) malloc(sizeof(char) * 13);
3 strcpy(a, "Hello World!");
4 strcpy(b, "Hello World!");
5
6 if(a == b) {
7     printf("strings match!\n");
8 }
```

The code above will not print anything even though the strings `a` and `b` have the same content. This is because `a == b` is comparing the memory address of the two variables. Since they point to different memory addresses (created by two separate calls to `malloc()`) they are not equal.

The C string library provides a standard `comparator` function to compare strings based on their content:

```
int strcmp(const char *a, const char *b);
```

The function takes two strings and returns an integer based on the lexicographic ordering of `a` and `b`. If `a` precedes `b`, `strcmp()` returns something negative. It returns zero if `a` and `b` have the same content. Otherwise it returns something positive if `b` precedes `a`.

Some examples:

```

1  int x;
2  x = strcmp("apple", "banana"); //x is negative
3  x = strcmp("zelda", "mario");  //x is positive
4  x = strcmp("Hello", "Hello");  //x is zero
5
6  //shorter strings precede longer strings:
7  x = strcmp("apple", "apples"); //x is negative
8
9  x = strcmp("Apple", "apple");  //x is negative

```

In the last example, `"Apple"` precedes `"apple"` since uppercase letters are ordered before lowercase letters according to the ASCII table. We can also make comparisons ignoring case if we need to using the alternative:

```
int strcasecmp(const char *s1, const char *s2);
```

which is a case-insensitive version. Here, `strcasecmp("Apple", "apple")` will return zero as the two strings are the same ignoring the cases.

The comparison functions also have byte-limited versions,

```
int strncmp(const char *s1, const char *s2, size_t n);
```

and

```
int strncasecmp(const char *s1, const char *s2, size_t n);
```

Both will only make comparisons in the first `n` bytes of the strings. Thus, `strncmp("apple", "apples", 5)` will result in zero as the two strings are equal in the first 5 bytes.

21.5. Conversions

We've previously examined the functions `atoi` and `atof` that allow you to convert a strings that hold numeric values to `int` and `double` values respectively. Another way to convert strings to numbers is to use a function similar to the familiar `scanf()` function which reads its string from the standard input. The `sscanf()` function reads its "input" from a string instead of the standard input.

```

1  char s[] = "103212.3214";
2  double x;
3  sscanf(s, "%lf", &x);
4  //x now has the value 103212.3214

```

The `sscanf()` function differs in its first argument: the string that contains the value you want to parse. Otherwise, the second two arguments are as in `scanf()`: the format (as a string) and the variable(s) that the results should be stored in (passed by reference).

21. Strings

Likewise, there is a companion `sprintf()` which is similar to the `printf()` function, but instead of printing to the standard output, it “prints” to the string. That is, the result is placed in a string.

```
1 int x = 10;
2 double y = 3.14;
3 char *s = (char *) malloc(sizeof(char) * 50);
4 sprintf(s, "The value of x is %d, y = %f.", x, y);
5 //s now contains "The value of x is 10, y = 3.140000."
```

21.6. Tokenizing

Recall that *tokenizing* is the process of splitting up a string along some *delimiter*. For example, the comma delimited string, `"Smith,Joe,12345678,1985-09-08"` contains four pieces of data delimited by a comma. Our aim is to split this string up into four separate strings so that we can process each one.

The C string library provides a tokenizing function:

```
char *strtok(char *str, const char *delim);
```

which works as follows. The first argument is the string that you want to tokenize and the second contains the delimiter that you want to split along. The second argument is actually a string and allows you to specify more than one delimiter, but we’ll restrict our attention to single character delimiters. The function returns a pointer to the first token in the string. To get the second and all subsequent tokens, we call `strtok()` again, but we pass it `NULL` as the first argument to continue parsing the same string.

If we pass a new string as the first argument to `strtok()` the tokenization process will start over on the new string. Note that the first argument does not have the `const` keyword. This is because `strtok()` *will make changes* to the string during the tokenization process. If the string needs to be preserved, tokenization should be performed on a deep copy of the string.

When there are no more tokens in the string, `strtok()` returns `NULL` to indicate no more tokens are in the string. This logic can be used to write a while loop to iterate over each token. Consider the following example.

```

1 char data[] = "Smith,Joe,12345678,1985-09-08";
2 char *token = NULL;
3 //make the initial call to strtok:
4 token = strtok(data, ",");
5 while(token != NULL) {
6     printf("token: %s\n", token);
7     //get the next token:
8     token = strtok(NULL, ",");
9 }

```

This outputs the following:

```

token: Smith
token: Joe
token: 12345678
token: 1985-09-08

```

It should be noted that `strtok()` is *not* [reentrant](#). It can only work on one string at a time. In a multithreaded application, two threads cannot both use `strtok()` or they would end up processing each other's strings. Even in a non-threaded application, we need to be careful. For example, we cannot process a string using `strtok()` in one function and then call another function that does the same. C does provide a reentrant version, `strtok_r()` that can be used.

22. File I/O

C provides several functions to manipulate and process files. Like other I/O functions, these are all defined in the standard input/output library, `stdio.h`. Writing binary or plaintext data is determined by which functions you use.

In general whether or not a file input/output stream is buffered or unbuffered is determined by the system configuration. There are some ways in which this can be changed, but we will not cover them in detail.

22.1. Opening Files

Files are represented in C by a `FILE` pointer type defined in the standard input/output library. As a pointer, it essentially points to the file stored in memory.

To open a file, you use the `fopen()` function (short for **file open**) which takes two arguments and returns a `FILE` pointer:

```
FILE *fopen(const char *path, const char *mode);
```

The first argument is the file path/name that you want to open for processing. The second argument is a string representing the “mode” that you want to open the file in. There are several supported modes, but the two we will be interested in are reading, in which case you pass it `"r"` and writing in which case you pass it `"w"`. The path can be an absolute path, relative path, or may be omitted if the file is in the current working directory.

```

1  //open a file for reading (input):
2  FILE *input = fopen("/user/apps/data.txt", "r");
3  //open a file for reading (output):
4  FILE *output = fopen("./results.txt", "w");
5
6  if(input == NULL) {
7      fprintf(stderr, "Unable to open input file");
8      exit(1);
9  }
10
11 if(output == NULL) {
12     fprintf(stderr, "Unable to open output file");
13     exit(1);
14 }

```

The two checks above check that the file opened successfully. If the file opening failed, `fopen()` returns `NULL`. Opening a file can fail for a number of reasons. On `POSIX` systems for example, additional information can be obtained by accessing the standard error number, `errno` (see Section 19.1). Some errors that can result:

- `ENOENT` – No such file or directory
- `EACCES` – Permission denied
- `ENOMEM` – Insufficient storage space is available

among many other possibilities. These error codes can be used to implement more specific error handling code if desired.

22.2. Reading & Writing

When a file is opened, the file pointer returned by `fopen()` initially points to the beginning of the file. As you read or write from it, the pointer advances through the file content.

22.2.1. Plaintext Files

To process plaintext we use two functions, `fprintf()` for output and `fscanf()` for input. These two functions should look familiar. They work almost exactly the same as `printf()` and `scanf()` that work with the standard output and standard input respectively. In fact, the standard in/out are both *files* so it makes sense that they can be read from/written to. The `f` prefixed versions are simply generalizations that can be used for any file. The only difference is that the first argument for these two functions is the file you want to output to or read from.


```

1  int x = 10;
2  double y = 3.14;
3
4  //write to a plaintext file
5  fprintf(output, "Hello World!\n");
6  fprintf(output, "x = %d, y = %f\n", x, y);
7
8  //read from a plaintext file
9  fscanf(input, "%d", &x);
10 fscanf(input, "%lf", &y);
11
12 //these are equivalent to printf, scanf:
13 fprintf(stdout, "Please enter an integer:");
14 fscanf(stdin, "%d", &x);

```

Using `fscanf()` for arbitrary string input is potentially dangerous as there is limited bounds checking. We must store the input value from the file into a string (character array), but if the file or line contains more characters than the array can accommodate we may have a buffer overflow.

A better way to read input is to use `fgets()` which allows us to limit the number of bytes that are read.

```
char *fgets(char *s, int size, FILE *stream);
```

The first argument is the string that the input data will be read into. The second parameter is how we limit the number of characters that will be read. It actually reads in one fewer character, `size-1` to account for the null-terminating character which `fgets()` automatically inserts for us. The last argument is the file pointer that we wish to read from.

The behavior of `fgets()` is that it reads *up to* `size-1` characters from the input file and places the results into `s`. If `fgets()` encounters either an `EOF` symbol or an endline character, `'\n'` it stops reading. In the case of an endline character, it is included in the result and may need to be *chomped* out (that is, removed).

The `fgets()` function can be used to process a file line by line until the end of the file is reached. Each line can be processed (perhaps tokenized) individually to extract particular pieces of data. This is typically how a *CSV* or similar file may be processed. To determine if the end of the file has been reached, you can use the return value of the function: it returns `NULL` when no more characters have been read.

```

1 FILE *input = fopen("data.txt", "r");
2 //this assumes that no line is more than 999 characters
3 char line[1000];
4 //read the first line
5 char *s = fgets(line, 1000, input);
6 while(s != NULL) {
7
8     //chomp the newline character from line:
9     line[strlen(line)-1] = '\0';
10
11     //process the current buffer
12     //for demonstration, we simply print it:
13     printf("line = %s\n", line);
14
15     //read the next line
16     s = fgets(line, 1000, input);
17 }

```

A similar function, `int fgetc(FILE *stream);` allows us to get a single character from the input file (returned as an `int`) if we prefer to read character by character.

22.2.2. Binary Files

To read and write binary data to files we use two different functions:

```
?size_t fread(void *ptr, size_t size, size_t nmemb, FILE *stream);
```

for reading from a file and

```
size_t fwrite(const void *ptr, size_t size, size_t nmemb, FILE *stream);
```

to write to a file. Both functions have the exact same argument:

1. `*ptr` is a pointer to the item that is being read/written (possibly an array of elements)
2. `size` is the number of bytes that each element stored at `ptr` take, usually resolved by using `sizeof()`
3. `nmemb` is the number of elements to be written/read
4. `stream` is the file stream to be read from/written to

These functions allow you to read/write an arbitrary amount of data. When reading, it is your responsibility, as usual, to ensure that the `ptr` is large enough to accommodate the data you are reading into it.

```

1  int x = 10;
2
3  FILE *binaryOutputFile = fopen("demo.bin", "w");
4
5  //write a single int to a file:
6  fwrite(&x, sizeof(int), 1, binaryOutputFile);
7
8  FILE *binaryInputFile = fopen("input.bin", "r");
9
10 //read a single int from the file:
11 fread(&x, sizeof(int), 1, binaryInputFile);
12
13 //read an entire array from the file:
14 int *a = (int *) malloc(10 * sizeof(int));
15 fread(a, sizeof(int), 10, binaryInputFile);

```

22.3. Closing Files

Once you are done processing a file, you should close it using the `fclose()` function:

```
int fclose(FILE *fp);
```

which takes a single argument, the `FILE` pointer of the file you wish to close. Closing an invalid file may result in an error or segmentation fault. In any case, after a file has been closed, it cannot be read from or written to. Doing so on a closed file is undefined behavior. Failure to close a file *may* result in a corrupted file.

23. Structures

Strictly speaking, C is not an object-oriented programming language, it is an *imperative* (or, relatedly a *structured* or *procedural*) programming language. This characterizes the language as one that changes a program’s state through statements and the use of function calls. Though C does not have objects, it does support a “weak” form of encapsulation through the use of *structures*. Structures are a user-defined type that collect multiple pieces of data together into one logical unit. Once defined, structures can be used in a program just like any other variable type; variables can be declared, passed and returned from functions, pointers to structures can be used, etc.

Structures form a “weak” form of encapsulation in that they only provide the grouping of data. The protection of data through visibility keywords is not supported. The grouping of functions that act on that data is also not readily supported.¹ However, even this weak form provides a very useful and convenient way to collect related pieces of data.

23.1. Defining Structures

To define a structure, we use the keyword `struct` along with the previously introduced keyword `typedef`. To motivate an example, let’s reconsider the student entity, which has a first and last name (strings), ID (integer), and a GPA (a floating point number). Each of these pieces of data can be encapsulated into a structure as follows.

```
1 typedef struct {
2     char *firstName;
3     char *lastName;
4     int id;
5     double gpa;
6 } Student;
```

Note the syntax and naming conventions:

- The elements of the structure (also referred to as components or *members*) are included inside curly brackets, delimited using semicolons (in contrast to an enumerated type which is a list, these elements do *not* constitute a list).

¹You *can* define a structure with function pointers as elements, so structures could technically include “methods” but this is not really what most people think of when considering object-oriented paradigms.

23. Structures

- A structure may contain any number of elements of any type.
- The name of the structure is provided at the end, ended with a semicolon.
- We use a modern naming convention: each element is named using lower camel casing while the name of the structure itself uses upper camel casing.

In addition, structure declarations are generally placed in a header file along with any any function prototypes that use the structure as a parameter or a return type. Once you have defined a structure you can now use it as you would a built-in variable type. For example,

```
Student s;
```

declares a `Student` structure with the variable name `s`.

23.1.1. Alternative Declarations

In some examples and code bases you may find an alternative way of declaring a structure that looks like the following.

```
1 struct Student {  
2     ...  
3 };
```

That is, without the keyword `typedef` and with the structure name at the beginning. The difference is a bit technical (the original syntax creates an anonymous structure with the `Student` identifier placed in the global namespace, while this declaration places the `Student` identifier in the structure namespace), but one of the consequences of using this type of declaration is that the `Student` identifier is not in the global scope, so to declare a variable of the type `Student` you need to further specify that it is a structure using the following syntax.

```
struct Student s;
```

Further, you may also see another style,

```
1 typedef struct Student {  
2     ...  
3 } Student;
```

Which places the `Student` identifier in both the global space *and* in the “structure” space. Which style of declaration you use depends on several factors, but for simplicity we’ll stick with the first style.

In addition, you may see some older naming conventions use lowercase underscore naming for structure names. In particular, [POSIX](#) systems use names that end with `_t` (indicating a structure type). You should avoid such naming conventions to avoid

conflicts.

Finally, though C does not provide a mechanism for the protection of data, many libraries and code bases will begin certain member variables with underscore(s) to indicate that they are “internal” variables used by the library that should *not* be accessed or modified. For example, `_someVariable` or `__anotherVariable` would indicate “private” variables that should not be tampered with. The C language itself would still allow you access and modify the variables, but doing so may violate assumptions and expectations of the library code, leading to undefined behavior.

23.1.2. Nested Structures

TODO: move discussion to objects chapter.

Consider adding another member element to the `Student` structure to model a student’s date of birth. How might we model a date? Unix systems model time as a single integer value that represents the number of milliseconds that have passed since the unix *epoch*, January 1st, 1970 (also known as Coordinated Universal Time or UTC). For example, the New Horizons space probe was launched on January 19th, 2006 at 19:00:00 UTC. This corresponds to 1,137,697,200, roughly 1.137 billion milliseconds since the epoch. Another way to model time is as a string. There are several standards for time representations, but the most common is ISO standard 8601 [?] which specifies time using a format that includes a date, time and an offset from Greenwich Mean Time (GMT). For example, the New Horizons launch date/time would be represented as `"2006-01-19T19:00:00+00:00"`.

To keep things simple, we’ll model our date using three numbers: a year, a month and a date. But how should we implement this? Conceptually, a date is a single entity, separating these three numbers doesn’t make much sense. This is a good use case for defining a structure.

```
1 typedef struct {
2     int year;
3     int month;
4     int date;
5 } Date;
```

How might we include this in our `Student` structure? Once we have defined a structure we can use it as we would a normal variable, so it makes sense that we could include it in another structure.

23. Structures

```
1 typedef struct {
2     char *firstName;
3     char *lastName;
4     int id;
5     double gpa;
6     Date dateOfBirth;
7 } Student;
```

This is a good illustration of a form of *composition* where one structure may be *composed* of other structures. Since the `Student` structure “owns” an instance of the `Date` structure, it is necessary to ensure that the `Date` structure is declared before the `Student` structure (just as we need to declare variables before we use them).

23.2. Usage

23.2.1. Declaration & Initialization

Once we have defined a structure (and included the header file it has been defined in), we can create instances using the usual syntax.

```
1 Student s;
2 Student t;
```

These static declarations will allocate enough space on the stack to hold all of the data associated with the structures (the two pointers, integer, and double). However, the values stored in each of the structure’s member variables are undefined. With this style of declaration, C does not define default values.

Alternatively, another way to declare instances of our structures is to use the following syntax.

```
1 Student s = {};
2 Student t = {
3     "Grace",
4     "Hopper",
5     12345678,
6     4.0,
7     {
8         1906,
9         1,
10        1
11    }
12 };
```

The first declaration creates a `Student` structure with defaulted values (zero for any

numeric types, `null` for any pointers). The second creates a `Student` structure initialized with the values provided in the curly brackets. The order matters here and will match the ordering of the original structure declaration. Since the `dateOfBirth` is a structure itself, a nested set of values within curly brackets is necessary. One drawback to this type of declaration is that the character pointers are statically declared. The strings `"Grace"` and `"Hopper"` are initialized in a *read-only* segment of memory, so any attempts to change the *contents* of these strings are undefined behavior. The pointers themselves, however, can be reassigned.

This static declaration also suffers the same limitations as static arrays: they are allocated on the stack and cannot, therefore be returned from functions. In addition, since structures consist of multiple pieces of data, their memory footprint is larger. Allocating larger and larger structures on the stack runs the risk of running out of stack memory resulting in a stack overflow. To solve this, we can instead use dynamically allocated structures.

To dynamically allocate a structure, we use a pointer to a structure and a call to `malloc()` to allocate enough space for the structure. Even though our structure is user-defined, we can still use the `sizeof()` macro to determine the number of bytes required by the structure. The compiler and macro are “smart” enough to look at the structure declaration and determine the size of each of its variables and add up the total number of bytes required.

```
1 Student *s = (Student *) malloc(sizeof(Student) * 1);
```

The multiplication by 1 in this example is not strictly necessary, but emphasizes the fact that we are allocating space for one structure and not an array of structures. Initializing a dynamically allocated structure like this does *not* initialize any of its variables as there are no default values defined by C. Moreover, it does *not* initialize memory for any pointer member variables. For example the `firstName` and `lastName` pointers need to be manually initialized with additional `malloc()` calls.

23.2.2. Selection Operators

Once we have a declared structure, we need to access its member variables and perhaps update them. If we have a statically declared structure, such as

```
Student s;
```

we can use the *direct component selector operator*, which is simply just a period followed by the member variable we wish to access. Commonly, this is referred to simply as the *dot operator*.

23. Structures

```
1 Student s;
2
3 //set values:
4 s.id = 87654321;
5 s.gpa = 3.9;
6
7 //access values:
8 printf("Name: %s, %s\n", s.lastName, s.firstName);
9 printf("GPA: %.2f\n", s.gpa);
```

When structures are nested, we can use the dot operator multiple times to access members variables of member variables.

```
1 s.dateOfBirth.year = 2525;
2 s.dateOfBirth.month = 12;
3 s.dateOfBirth.date = 25;
```

When we have a pointer to a structure, we cannot directly use the dot operator. Instead, we have to change the pointer into a “normal” structure by dereferencing it, then we can use the dot operator. However, the dot operator has a higher order of precedence than the dereferencing operator, thus parentheses are required:

```
1 Student *s = ...;
2 (*s).id = 87654321;
```

This can be a bit unwieldy, so C provides a convenience operator, the *indirect component selector operator*, or more commonly, the *arrow operator* that allows us to select a member variable with a single operator that resembles a left-pointing arrow.

```
1 Student *s = (Student *) malloc(sizeof(Student));
2
3 //set values:
4 s->id = 87654321;
5 s->gpa = 3.9;
6
7 //initialize the string variables:
8 s->firstName = (char *) malloc(sizeof(char) * 6);
9 strcpy(s->firstName, "Grace");
10 s->lastName = (char *) malloc(sizeof(char) * 7);
11 strcpy(s->lastName, "Hopper");
12
13 //access values:
14 printf("Name: %s, %s\n", s->lastName, s->firstName);
15 printf("GPA: %.2f\n", s->gpa);
16
17 s->dateOfBirth.year = 2525;
```

Note the last line: the `dateOfBirth` member variable was another structure, but not a pointer to a structure, so we use the dot operator to access the `year` member variable.

23.3. Arrays of Structures

Just as we can create arrays of built-in types such as integers, we can also create arrays of our user-defined structures. As an example, the following creates an array of 10 `Student` structures. Once created, we can treat them like any other array.

```
1 Student *roster = (Student *) malloc(sizeof(Student) * 10);
2
3 ...
4
5 double sum = 0.0;
6 for(i=0; i<10; i++) {
7     sum += roster[i].gpa;
8 }
9 double averageGpa = sum / 10;
```

As in the example, we can index each element in the array, `roster`. Once indexed, each element is a regular structure and so we use the dot operator to access each of its member variables. As with any other array, each element takes up a number of bytes, equal to `sizeof(Student)`. We can swap and reassign each element just like any other variable, for example, the following code swaps the first two elements using a temporary variable.

```
1 Student temp = roster[0];
2 roster[0] = roster[1];
3 roster[1] = temp;
```

Each of these operations copies over every byte that makes up the structure. For small structures, this isn't that big of a deal. However, for larger structures, this may become an issue, especially if we do this often or pass structures around to functions.

As an alternative, we could instead deal indirectly with structures by creating an array of *pointers* to structures. Swapping elements then involves only copying pointer values rather than every byte that makes up the structure. To do this, we use the familiar pointer-to-pointer syntax.

```

1  Student **roster = (Student **) malloc(sizeof(Student *) * 10);
2  for(i=0; i<10; i++) {
3      roster[i] = (Student *) malloc(sizeof(Student) * 1);
4  }
5  ...
6
7  //access each as pointers and use the arrow operator
8  roster[0]->id = 87654321;
9  roster[0]->gpa = 4.0;
10
11 //swap the first two *pointers*:
12 Student *temp = roster[0];
13 roster[0] = roster[1];
14 roster[1] = temp;

```

As in the example above, if each element in the array is a pointer to a structure, then we use the arrow operator to access each member variable.

23.4. Using Structures With Functions

As with built-in types, we can use structures as parameters to functions as well as the return type of functions. Consider the following examples.

```

1  void foo(Student s);
2  Student bar();

```

In the first prototype, we would pass a `Student` structure *by value* to the function. As we've already seen, this would mean that every byte of the structure would be copied onto the stack. For larger structures, we risk a stack overflow while for even smaller structures this can be very inefficient.

The second prototype won't even work properly. As we've already seen, we cannot return statically declared variables (we cannot return a local, statically declared array for example) as the stack frame in which it exists would be popped off the top of the call stack when returning from the function.

The solution to both of these problems is to only deal with dynamically allocated structures, passing them by reference to functions, and returning pointers to dynamically allocated instances as return types. For example, the functions above would be better implemented as follows.

```

1  void foo(const Student *s);
2  Student * bar();

```

In the first example, we've used the `const` keyword which prevents any changes to

the structure's values (we may omit this if we need to design a function that changes its values). We will now consider several idiomatic examples of using structure with functions.

23.4.1. Factory Functions

Properly creating and initializing structure instances can be a complex and tedious task. However, it is likely that we will need to repeat this operation over and over. We can simplify our task if we write a function that creates a structure instance for us while we provide the function the values we want it initialized to. Such functions are sometimes referred to as *factory* functions as they can be used to manufacture as many instances as we want (in object oriented programming languages, such methods are called constructors).

We will need to take care that we make *deep* copies of any dynamically allocated elements such as strings. Shallow copies where references are shared may lead to unexpected behavior as changes to one string may affect multiple structures.

```

1  /**
2   * This function creates a new student structure with the
3   * given values.
4   */
5  Student * createStudent(const char *firstName,
6                          const char *lastName,
7                          int id,
8                          double gpa) {
9
10     Student *s = NULL;
11     s = (Student *) malloc(sizeof(Student) * 1);
12
13     //make a deep copy of the strings
14     s->firstName = (char *)malloc(sizeof(char) * (strlen(firstName)+1));
15     strcpy(s->firstName, firstName);
16     s->lastName = (char *)malloc(sizeof(char) * (strlen(lastName)+1));
17     strcpy(s->lastName, lastName);
18
19     s->id = id;
20     s->gpa = gpa;
21
22     return s;
23 }
```

Another common operation is to create a copy of a given structure. However, we will want to again ensure that everything is a *deep* copy so that the two structures are not

23. Structures

sharing references. We can easily do this by reusing the functionality we just wrote in the factory function.

```
1  /**
2   * This function creates a new, deep copy of a Student
3   * structure .
4   */
5  Student * copyStudent(const Student *s) {
6      return createStudent(s->firstName, s->lastName, s->id, s->gpa);
7  }
```

23.4.2. To String Functions

Another common operation with structures is to output their data as a human-readable string representation. We could write a function that output a structure's member variables to the standard output using `printf()`. However, it would more useful if we created a more general function that returned a string representation of the structure. That way, we could decide what to do with the string: output it to the standard output, to a file, etc.

Not all structure instances will require the same length string, however. Some students for example may have long names, while others have short. We can handle this by first calculating the length of the string necessary for whatever formatting we've chosen.

```
1  /**
2   * Returns a string representation of the given
3   * Student structure.
4   */
5  char * studentToString(const Student *s) {
6
7      int n = strlen(s->firstName) +
8              strlen(s->lastName) +
9              8 + //id, assumed to always be at most 8 digits
10             4 + //gpa, assumed to be 0.0 - 4.0
11             19; //other formatting characters
12
13     char *str = (char *) malloc(sizeof(char) * n);
14
15     sprintf(str, "%s, %s, ID = %d (GPA = %.2f)",
16             s->lastName, s->firstName, s->id, s->gpa);
17
18     return str;
19 }
```

Here, we've utilized a variation on the familiar `printf()` function, `sprintf()` which

“prints” the result not to the standard output or a file, but to a string, specified as the first argument.

23.4.3. Passing Arrays of Structures

We often also have need to pass arrays of structures to functions. As an example, consider passing an entire roster of students to a function in order to compute the average GPA. If we have an array of structures, we would have a function that looked something like the following.

```

1  /**
2   * Computes the average GPA of the Student structures in
3   * the given roster (which is of size n).
4   */
5  double computeAverageGpa(const Student *roster, int n) {
6      double sum = 0.0;
7      int i;
8      for(i=0; i<n; i++) {
9          sum += roster[i].gpa;
10     }
11     return sum / n;
12 }
```

When we pass in the array of structures, it is not passed by value. That is, the total number of bytes for each student is *not* copied onto the call stack. Nevertheless, as we’ve previously seen it is sometimes preferable to maintain an array of pointers to structures. If we had such an array, we would instead of a function that looks something like this.

```

1  /**
2   * Computes the average GPA of the Student structures in
3   * the given roster (which is of size n).
4   */
5  double computeAverageGpa(const Student **roster, int n) {
6      double sum = 0.0;
7      int i;
8      for(i=0; i<n; i++) {
9          sum += roster[i]->gpa;
10     }
11     return sum / n;
12 }
```

The only difference here is in how we access the `gpa` member variable using the arrow operator instead of the dot operator.

Part II.

The Java Programming Language

24. Basics

The Java programming language was developed in the early 1990s at Sun Microsystems by James Gosling, Mike Sheridan, and Patrick Naughton. Its original intention was to enable cable box sets to be more interactive. By the mid-90s, Java was retargeted toward the [WWW](#). The first public release came on May 23, 1995 with the first [Java Development Kit \(JDK\)](#), Java 1.0 on January 23rd, 1996. A new, updated release has come about every other year. As of 2014, Java 8 is the current stable version.

Today, Java is one of the most popular programming languages, consistently ranked as one of the top 2 languages (see <http://www.tiobe.com>). It is now owned and maintained by Oracle, but there are many open source tools, compilers and runtime environments available. Java is used in everything from mobile devices (Android) and desktop applications to enterprise-level servers.

From its inception, Java was designed with 5 basic principles:

1. Simple, Object-oriented, familiar
2. Robust and secure
3. Architecture-neutral and portable
4. High performance
5. Interpreted, threaded and dynamic

Java offers many key features that have made it popular. It is unique in that it is not entirely compiled nor interpreted. Instead, Java source code is compiled into an intermediate form, called Java bytecode. This bytecode is not directly runnable on a processor. Instead, a [JVM](#), an application that was written and compiled a particular processor, interprets the bytecode and runs the application. This added layer of abstraction means that Java source code can be written once (and compiled once) and then run anywhere on any device that has a [JVM](#). The added layer of abstraction makes development easier, but does come at a cost in performance. However, the most recent [JVMs](#) have offered performance that is comparable to native machine code in many applications.

Another key feature is that Java has its own automated [garbage collection](#). Some languages require manual memory management, meaning that requesting, managing, and freeing up memory is part of the code that you write as a developer. Failure to handle memory management properly can lead to wasted resources (memory leaks), poor or

unstable performance, and even more serious security issues (buffer overflows). In Java, there is no manual memory management. The [JVM](#) handles the allocation and clean up of memory automatically.

In following with the five design principles, Java is similar in syntax to C (called “C-style syntax”). Executable statements are terminated by semicolons, code blocks are defined by opening/closing curly brackets, etc. Java is also fundamentally an [Object-Oriented Programming \(OOP\)](#) language. With the exception of a few primitive types, in Java, everything is an object or belongs to an object.

24.1. Getting Started: Hello World

The hallmark of the introduction of programming languages is the *Hello World!* program. It consists of a simple program whose only purpose is to print out the message “Hello World!” to the user in some manner. The simplicity of the program allows the focus to be on the basic syntax of the language. It is also typically used to ensure that your development environment, compiler, runtime environment, etc. are functioning properly with a minimal example. A basic Hello World! program in Java can be found in Code Sample 24.1.

```

1  package unl.cse;    //package declaration
2
3  //imports would go here
4
5  /**
6   * A basic hello world program in Java
7   */
8  public class HelloWorld {
9
10     //static main method
11     public static void main(String args[]) {
12         System.out.println("Hello World!");
13     }
14
15 }
```

Code Sample 24.1: Hello World Program in Java

We will not focus on any particular development environment, code editor, or any particular operating system, compiler, or ancillary standards in our presentation. However, as a first step, you should be able to write, compile, and run the above program on the environment you intend to use for the rest of this book. This may require that you download and install a [JDK](#) and [IDE](#). Eclipse (<http://eclipse.org/>) is the

industry standard, though IntelliJ (<https://www.jetbrains.com/idea/>) and NetBeans (<https://netbeans.org/>) are also popular among many others.

24.2. Basic Elements

Using the Hello World! program as a starting point, we will now examine the basic elements of the Java language.

24.2.1. Basic Syntax Rules

Java's syntax is adopted from C, referred to as "C-style syntax." These elements include the following.

- Java is a statically typed language so variables must be declared along with their types before using them.
- Strings are delimited with double quotes. Single characters, including special escaped characters are delimited by single quotes; `"this is a string"`, and these are characters: `'A'`, `'4'`, `'$'` and `'\n'`
- In addition, Java uses Unicode (UTF-16 encoding) to represent characters. This is fully back-compatible with ASCII, but also allows you to specify Unicode characters using special escape sequences and hexadecimal encodings. For example, `'\u4FFA'` represents a Japanese character:

俺

The string `"\u4FFA\u306F \u6700\u9AD8\u3060\u305C\uFF01"` represents the phrase

俺は 最高だぜ !

- Executable statements are terminated by a semicolon, `;`
- Code blocks are defined by using opening and closing curly brackets, `{ ... }`. Moreover, code blocks can be *nested*: code blocks can be defined within other code blocks.
- Variables are *scoped* to the code block in which they are declared and are only valid within that code block.
- In general, whitespace between coding elements is ignored.

Though not a syntactic requirement, the proper use of whitespace is important for good, readable code. Code inside code blocks is indented at the same indentation. Nested code blocks are indented further. Think of a typical table of contents or the outline of a formal paper or essay. Sections and subsections or points and points all follow proper indentation with elements at the same level at the same indentation. This convention is used to organize code and make it more readable.

24.2.2. Program Structure

Classes

In Java, everything is a *class* or belongs to a class. A class is an extensible program or blueprint for creating objects. Objects are an integral part of OOP that we'll explore later. However, to start out our programs will be simple enough that they can be contained in a single class.

To declare a class, you use the following syntax.

```
public class HelloWorld { ... }
```

where the contents of the class are placed between the opening/closing curly brackets. In addition, a class must be placed in a Java source file with the same name. In our previous example, the class must be in a file named `HelloWorld.java`.

When naming classes, the most commonly accepted naming convention is to use uppercase camel casing (also called PascalCase) in which each word in the name is capitalized including the first. Examples: `Employee`, `SavingsAccount`, `ImageFile`, etc. Class names (as well as their source file names) are case sensitive.

Packages

Java code is organized into modules called *packages*. Packages are essentially directories (or folders) which follow a directory tree structure which allows subdirectories and separate directories at the same level. It all starts at the *root* directory called the “default” package.

Within a source file, we declare which package the file belongs to using the keyword `package` followed by a “fully qualified package declaration” which is essentially just the names of the directories that the file is located in, separated by a period. The declaration is terminated by a semicolon. For example, the package declaration,

```
package unl.cse;
```

would indicate that the file belongs in the directory `cse` which is a subdirectory of the directory `unl`. The absence of a package declaration will mean that the file is associated

with the default directory.

Packages allow you to organize source files and code functionality. Mathematics related classes can be placed in one package while image related classes can be placed in another, etc. It also provides separate name spaces for classes. There could be 3 or 4 different classes named `List` for example. They could not be located in the same directory, however: if you wanted to use one which one would you be referring to? By separating them into packages, they can all exist without conflict. When we want to use a particular one, we *import* that class with its fully qualified package name.

Imports

An `import` statement essentially “brings in” another class so that its methods and functionality can be used. For example, there is a class named `Scanner` (located in the package `java.util`) that makes it easy to read input from the standard input. To include it in our program so that we can use its functionality, we would need¹ to import it:

```
import java.util.Scanner;
```

Classes in the package `java.lang` (such as `String` and `Math`) are considered standard and are imported by default without an explicit `import` statement.

You may see some code that uses a *wildcard* like `import java.util.*;` which ends up importing every class in that package. This is generally considered bad practice. In general, code should be intentional and specific, importing every class even if they are not used goes against this principle.

When naming packages, you must follow the general naming rules for identifiers (see below). Package names cannot begin with a number, no whitespace, etc. Moreover, the general convention for package names is to use lowercase underscore casing, `here_is_an_example`. Moreover, packages and subpackages follow the same convention as directories: the top most directory is the most general and subdirectories are more and more specific.

In many of our examples we’ll use `unl.cse` (UNL, University of Nebraska–Lincoln; CSE, Department of Computer Science & Engineering) which illustrates this general-to-specific organization.

24.2.3. The `main` Method

Every executable program has to have a beginning: a point at which the program starts to execute. In Java, a class may contain many variables and methods, but a class is only

¹Strictly, speaking you can still use it without importing it, but you’d need to use a fully qualified path name at declaration/instantiation.

executable if it contains a `main` method. When a Java class is compiled and the JVM is started, the JVM loads the class into memory and starts executing code contained in the `main` method.

In addition, our `main` method takes an *array* of `String` types which serve to communicate any command line arguments provided to the program (review Section 2.4.4 for details). The array, `args` stores the arguments as strings. The number of arguments provided can be determined using the `length` property of the array. Specifically, `args.length` is an integer indicating how many arguments were provided. This does *not* include the name of the program (class) itself as that is already known to the programmer.

To access any one argument, it will be necessary to *index*. The index for the first argument is zero, thus the first argument is `args[0]`, the second is `args[1]`, etc. The last one would be at `args[args.length-1]`.

If a user is expected to provide numbers as input, they'll need to be converted as the `args` array are only `String` types. To convert the arguments you can use parsing methods provided by the `Integer` and `Double` classes. An example:

```
1 //converts the "first" command line argument to an integer
2 int x = Integer.parseInt(args[0]);
3 //converts the "third" command line argument to a double:
4 double y = Double.parseDouble(args[1]);
```

24.2.4. Comments

Comments can be written in a Java program either as a single line using two forward slashes, `//comment` or as a multiline comment using a combination of forward slash and asterisk: `/* comment */`. With a single line comment, everything on the line *after* the forward slashes is ignored. With a multiline comment, everything in between the forward slash/asterisk is ignored. Comments are ultimately ignored by the compiler so the amount of comments do not have an effect on the final executable code. Consider the following example.

```
1 //this is a single line comment
2 int x; //this is also a single line comment, but after some code
3
4 /*
5     This is a comment that can
6     span multiple lines to format the comment
7     message more clearly
8 */
9 double y;
```


Type	Description	Wrapper Class
<code>byte</code>	8-bit signed 2s complement integer	<code>Byte</code>
<code>short</code>	16-bit signed 2s complement integer	<code>Short</code>
<code>int</code>	32-bit signed 2s complement integer	<code>Integer</code>
<code>long</code>	64-bit signed 2s complement integer	<code>Long</code>
<code>float</code>	32-bit IEEE 754 floating point number	<code>Float</code>
<code>double</code>	64-bit floating point number	<code>Double</code>
<code>boolean</code>	may be set to <code>true</code> or <code>false</code>	<code>Boolean</code>
<code>char</code>	16-bit Unicode (UTF-16) character	<code>Character</code>

Table 24.1.: Primitive types in Java

Most code editors and IDEs will present comments in a special color or font to distinguish them from the rest of the code (just as our example above does). Failure to close a multiline comment will likely result in a compiler error but with color-coded comments its easy to see the mistake visually.

Another common comment style convention is the Javadoc (Java Documentation) style of comments. Javadoc style comments are multiline comments that begin with `/**` (that is, two asterisks). The Javadoc framework allows you to *markup* your comments with tags and links so that documentation can be automatically generated and published. We will sometimes use this style, but we will not cover the details. For documentation, see Oracle’s website, <http://www.oracle.com/>.

24.3. Variables

Java has 8 built-in *primitive* types supporting numbers (integers and floating-point numbers), Booleans, and characters. Table 24.1 contains a complete description of these types. Each of these primitive types also has a corresponding *wrapper* class defined in the `java.lang` package. Wrapper classes provide *object* versions of each of these classes. The object versions have many utility methods that can be used in relation to their type. For example, the aforementioned `Integer.parseInt()` method is part of the `Integer` wrapper class.

The wrapper classes, however, are different. These are objects, so when a reference is declared for them, by default, that reference refers to `null`. The keyword `null` is used to indicate a special memory address that represents “nothing”. In fact, the default value for *any* object type is `null`. Care must be taken when mixing primitive types and their wrapper classes (see below) as `null` references may result in a `NullPointerException`. Finally, instances of the wrapper classes are *immutable*. Once they are created, they cannot be changed. References can be made to reference a different object, but the object’s value cannot be changed.

24.3.1. Declaration & Assignment

Java is a statically typed language meaning that all variables must be declared before you can use them or refer to them. In addition, when declaring a variable, you must specify both its type and its identifier. For example:

```
1 int numUnits;
2 double costPerUnit;
3 char firstInitial;
4 boolean isStudent;
```

Each declaration specifies the variables type followed by the identifier and ending with a semicolon. The identifier rules are fairly standard: a name can consist of lower and uppercase alphabetic characters, numbers, and underscores but may *not* begin with a numeric character. We adopt the modern camelCasing naming convention for variables in our code.

In general, variables *must* be assigned a value before you can “read” them (say printing them) or otherwise using them in an expression. You do not have to immediately assign a value when you declare them (though it is good practice), but some value must be assigned before they can be used or the compiler will issue an error.²

The assignment operator is a single equal sign, `=` and is a right-to-left assignment. That is, the variable that we wish to assign the value to appears on the left-hand-side while the value (literal, variable or expression) is on the right-hand-side. Using our variables from before, we can assign them values:

```
1 numUnits = 42;
2 costPerUnit = 32.79;
3 firstInitial = 'C';
4 isStudent = true;
```

For brevity, Java allows you to declare a variable and immediately assign it a value on the same line. So these two code blocks could have been more compactly written as:

```
1 int numUnits = 42;
2 double costPerUnit = 32.79;
3 char firstInitial = 'C';
4 boolean isStudent = true;
```

As another shorthand, we can declare multiple variables on the same line by delimiting them with a comma. However, they *must* be of the same type. We can also use an assignment with them.

²Instance variables, that is variables declared as part of an object *do* have default values. For objects, the default is `null`, for all numeric types, zero is the default value. For the `boolean` type, `false` is the default, and the default `char` value is `\0`, the null-terminating character (zero in the ASCII table).

```

1  int numOrders, numUnits = 42, numCustomers = 10, numItems;
2  double costPerUnit = 32.79, salesTaxRate;

```

Another convenient keyword is `final`. Though it has several uses, when applied to a variable declaration, it makes it a read-only variable. After a value has been assigned to a `final` variable, its value cannot be changed.

```

1  final int secret = 42;
2  final double salesTaxRate = 0.075;

```

Any attempt to reassign the values of `final` variables will result in a compiler error.

24.4. Operators

Java supports the standard arithmetic operators for addition, subtraction, multiplication, and division using `+`, `-`, `*`, and `/` respectively. Each of these operators is a binary operator that acts on two operands which can either be literals or other variables and follow the usually rules of arithmetic when it comes to order of precedence (multiplication and division before addition and subtraction).

```

1  int a = 10, b = 20, c = 30, d;
2  d = a + 5;
3  d = a + b;
4  d = a - b;
5  d = a + b * c;
6  d = a * b;
7  d = a / b; //integer division and truncation! See below
8
9  double x = 1.5, y = 3.4, z = 10.5, w;
10 w = x + 5.0;
11 w = x + y;
12 w = x - y;
13 w = x + y * z;
14 w = x * y;
15 w = x / y;
16
17 //you can do arithmetic with both types:
18 w = a + x;
19
20 //however you CANNOT assign a double to an integer:
21 d = b + y; //compilation error
22 //but you can do so with an explicit type cast:
23 d = (int) (b + y); //though truncation occurs, d is 23

```

In addition, you can *mix* the wrapper classes with their primitive types. You must be careful though. The wrapper classes are object references which can be `null`. If a `null` reference is used in an arithmetic expression, it will result in a `NullPointerException` which can be caught and handled. If not caught, it will end up being a fatal error. Some examples:

```

1  int a = 10, c;
2  Integer b = 20;
3
4  //int and Integer can be mixed:
5  c = a + b;
6
7  double x = 3.14, z;
8  Double y = 2.71;
9  //double and Double can be mixed:
10 z = x + y;
11
12 //all types can be mixed:
13 double u = a + x + b + y;
14
15 //Be careful:
16 Integer d = null;
17 c = a + d; //NullPointerException

```

This works because of a mechanism called *autoboxing* (or *autounboxing* in this case). The wrapper class is acting like a “box”: its an object that stores the value of a primitive type. When it gets used in an arithmetic expression, it gets “unboxed” and converted to a primitive type so that the arithmetic operation is performed on compatible primitive types. This is all done by the compiler and is completely transparent to us. However, that is the reason that we may get a `NullPointerException`. Our code actually gets converted from `c = a + d;` to `c = a + d.doubleValue();`. The `doubleValue` method returns a `double` primitive value. However, if `d` is `null`, you can’t call a method on it; thus the `NullPointerException`.

Special care must be taken when dealing with `int` types. For all four operators, if both operands are integers, the result will be an integer. For addition, subtraction, and multiplication this isn’t an issue, but for division it means that when we divide, say `(10 / 20)`, the result is not 0.5 as expected. The number 0.5 is a floating-point number. As such, the fractional part gets *truncation*truncated (cut off and thrown out) leaving only zero. In the code above, `d = a / b;` the variable `d` ends up getting the value zero because of this.

A solution to this problem is to use explicit *type casting* to force at least one of the operands in an integer division to become a `double` type. For example:

```

1  int a = 10, b = 20;
2  double x;
3
4  x = (double) a / b;

```

Assigning a floating-point number to an integer is not allowed in Java and attempting to do so will be treated as a compiler error. This is because Java does not support *implicit* type casts. However, you *can* do so if you provide an *explicit* type cast as in the code above,

```
d = (int) (b + y);
```

In this code, `b + y` is correctly computed as $20 + 3.4 = 23.4$, but the explicit type cast (down to an integer) results in truncation. The .4 gets cutoff and `d` gets the value 23.

Assigning an `int` value to a `double` variable is not a problem as the integer 2 becomes the floating-point number 2.0.

Java also supports the integer remainder operator using the `%` symbol. This operator gives the remainder of the result of dividing two integers. Examples:

```

1  int x;
2
3  x = 10 % 5; //x is 0
4  x = 10 % 3; //x is 1
5  x = 29 % 5; //x is 4

```

24.5. Basic I/O

Java provides several ways to perform input and output operations on the standard input/output as part of the `System` class. The `System` class contains a standard output stream which can be accessed using `System.out`. It also has a standard input stream which can be accessed using `System.in`.

For output, there are several methods that can be used but we'll focus on `println` and `printf`. The first is for printing strings on a single line. The `ln` at the end indicates that the method will insert an newline character, `\n` for you. The second is a `printf`-style output method that takes placeholders like `%d` and `%f` (review Section 2.4.3 for details).

The easiest way to read input is through the `Scanner` class. You can create a new instance of the scanner class and associate it with the standard input using the following code.

```
Scanner s = new Scanner(System.in);
```

The variable `s` is now active and can be read from. You can get specific values from the `Scanner` by calling various methods such as `s.nextInt()` to get an `int`, `s.nextDouble()` to get a `double`, etc. When these methods are called, the program *blocks* until the user enters her input and presses the enter/return key. The conversion to the type you requested is automatic. A full example is depicted in Code Sample 24.2.

```

1 Scanner s = new Scanner(System.in);
2 int a;
3 System.out.println("Please enter a number: ");
4 a = s.nextInt();
5 System.out.printf("Great, you entered %d\n", a);

```

Code Sample 24.2: Basic Input/Output in Java

One potential problem with using `Scanner` is that the methods cannot force a user to enter good input. In the example above, if the user, instead of entering a number, entered `"Hello"`, the conversion to a number would fail. This would result in a `InputMismatchException`.

24.6. Examples

24.6.1. Converting Units

Let's start with a simple task: let's write a program that will prompt the user to enter a temperature in degrees Fahrenheit and convert it to degrees Celsius using the formula

$$C = (F - 32) \cdot \frac{5}{9}$$

We begin with the basic program outline which will include a package and class declaration. We'll also need to read from the standard input, so we'll import the `Scanner` class. We'll want our class to be executable, so we need to put a `main` method in our class. Finally, we'll document our program to indicate its purpose.

```

1  package unl.cse;
2
3  import java.util.Scanner;
4
5  /**
6   * This program converts Fahrenheit temperatures to
7   * Celsius
8   */
9  public class TemperatureConverter {
10
11     public static void main(String args[]) {
12
13         //TODO: implement this
14
15     }
16 }

```

It is common for programmers to use a comment along with a `TODO` note to themselves as a reminder of things that they still need to do with the program.

Let's first outline the basic steps that our program will go through:

1. We'll first prompt the user for input, asking them for a temperature in Fahrenheit
2. Next we'll read the user's input, likely into a floating-point number as degrees can be fractional
3. Once we have the input, we can calculate the degrees Celsius by using the formula above
4. Lastly, we will want to print the result to the user to inform them of the value

Sometimes its helpful to write an outline of such a program directly in the code using comments to provide a step-by-step process. For example:

```

1  package unl.cse;
2
3  import java.util.Scanner;
4
5  /**
6   * This program converts Fahrenheit temperatures to
7   * Celsius
8   */
9  public class TemperatureConverter {
10
11     public static void main(String args[]) {
12
13         //TODO: implement this
14         //1. Prompt the user for input in Fahrenheit
15         //2. Read the Fahrenheit value from the standard input
16         //3. Compute the degrees Celsius
17         //4. Print the result to the user
18
19     }
20 }

```

As we read each step it becomes apparent that we'll need a couple of variables: one to hold the Fahrenheit (input) value and one for the Celsius (output) value. It also makes sense that each of these should be `double` variables as we want to support fractional values. So at the top of our `main` method, we'll add the variable declarations:

```
double fahrenheit, celsius;
```

We'll also need a scanner, initialized to read from the standard input:

```
Scanner s = new Scanner(System.in);
```

Each of the steps is now straightforward; we'll use a `System.out.println` statement in the first step to prompt the user for input:

```
System.out.println("Please enter degrees in Fahrenheit: ");
```

In the second step, we'll use our `Scanner` to read in a value from the user for the `fahrenheit` variable. Recall that we use the method `s.nextDouble()` to read a `double` value from the user.

```
fahrenheit = s.nextDouble();
```

We can now compute `celsius` using the formula provided:

```
celsius = (fahrenheit - 32) * (5 / 9);
```

Finally, we use `System.out.printf` to output the result to the user:


```
System.out.printf("%f Fahrenheit is %f Celsius\n", fahrenheit, celsius);
```

Try typing and running the program as defined above and you'll find that you don't get correct answers. In fact, you'll find that no matter what values you enter, you get zero. This is because of the calculation using `(5 / 9)`: recall what happens with integer division: truncation! This will *always* end up being zero.

One way we could fix it would be to pull out our calculators and find that $\frac{5}{9} = 0.55555\ldots$ and replace `(5 / 9)` with `0.555555`. But, how many fives? It may be difficult to tell how accurate we can make this floating-point number by hardcoding it ourselves. A much better approach would be to let the compiler take care of the optimal computation for us by making at least one of the numbers a `double` to prevent integer truncation. That is, we should instead use `5.0 / 9`.

The full program can be found in Code Sample 24.3.

```

1  package unl.cse;
2
3  import java.util.Scanner;
4
5  public class TemperatureConverter {
6
7      public static void main(String args[]) {
8
9          double fahrenheit, celsius;
10         Scanner s = new Scanner(System.in);
11
12         //1. Prompt the user for input in Fahrenheit
13         System.out.println("Please enter degrees in Fahrenheit: ");
14
15         //2. Read the Fahrenheit value from the standard input
16         fahrenheit = s.nextDouble();
17
18         //3. Compute the degrees Celsius
19         celsius = (fahrenheit - 32) * 5.0 / 9;
20
21         //4. Print the result to the user
22         System.out.printf("%f Fahrenheit is %f Celsius\n",
23                             fahrenheit, celsius);
24
25     }
26 }
```

Code Sample 24.3: Fahrenheit-to-Celsius Conversion Program in Java

24.6.2. Computing Quadratic Roots

Some programs require the user to enter multiple inputs. The prompt-input process can be repeated. In this example, consider asking the user for the coefficients, a, b, c to a quadratic polynomial,

$$ax^2 + bx + c$$

and computing its roots using the quadratic formula,

$$x = \frac{-b \pm \sqrt{b^2 - 4ac}}{2a}$$

As before, we can create a basic program with a `main` method and start filling in the details. In particular, we'll need to prompt for the input a , then read it in; then prompt for b , read it in and repeat for c . We'll also need several variables: three for the coefficients a, b, c and *two* more; one for each root. Thus, we have

```

1  double a, b, c, root1, root2;
2  Scanner s = new Scanner(System.in);
3
4  System.out.println("Please enter a: ");
5  a = s.nextDouble();
6  System.out.println("Please enter b: ");
7  b = s.nextDouble();
8  System.out.println("Please enter c: ");
9  c = s.nextDouble();

```

Now to compute the roots: we need to take care that we correctly adapt the formula so it accurately reflects the order of operations. We also need to use the standard math library's square root function (unless you want to write your own! Carefully adapting the formula leads to

```

1  root1 = (-b + Math.sqrt(b*b - 4*a*c) ) / (2*a);
2  root2 = (-b - Math.sqrt(b*b - 4*a*c) ) / (2*a);

```

Finally, we print the output using `System.out.printf`. The full program can be found in Code Sample 24.4.

This program was interactive. As an alternative, we could have read all three of the inputs as command line arguments, taking care that we need to convert them to floating-point numbers. Lines 16–21 in the program could have been changed to

```

1  a = Double.parseDouble(args[0]);
2  b = Double.parseDouble(args[1]);
3  c = Double.parseDouble(args[2]);

```

Finally, think about the possible inputs a user could provide that may cause problems for this program. For example:

- What if the user entered zero for a ?
- What if the user entered some combination such that $b^2 < 4ac$?
- What if the user entered non-numeric values?
- For the command line argument version, what if the user provided less than three argument? Or more?

How might we prevent the consequences of such bad inputs? That is, how might we handle the even that a users enters those bad inputs and how do we communicate these errors to the user? To do so we'll need conditionals.

```

1  package unl.cse;
2
3  import java.util.Scanner;
4
5  /**
6   * This program computes the roots to a quadratic equation
7   * using the quadratic formula.
8   */
9  public class QuadraticRoots {
10
11     public static void main(String args[]) {
12
13         double a, b, c, root1, root2;
14         Scanner s = new Scanner(System.in);
15
16         System.out.println("Please enter a: ");
17         a = s.nextDouble();
18         System.out.println("Please enter b: ");
19         b = s.nextDouble();
20         System.out.println("Please enter c: ");
21         c = s.nextDouble();
22
23         root1 = (-b + Math.sqrt(b*b - 4*a*c) ) / (2*a);
24         root2 = (-b - Math.sqrt(b*b - 4*a*c) ) / (2*a);
25
26         System.out.printf("The roots of %fx^2 + %fx + %f are: \n",
27             a, b, c);
28         System.out.printf("  root1 = %f\n", root1);
29         System.out.printf("  root2 = %f\n", root2);
30
31     }
32
33 }

```

Code Sample 24.4: Quadratic Roots Program in Java

25. Conditionals

Java supports the basic if, if-else, and if-else-if conditional structures as well as switch statements. Java has Boolean types and logical statements are built using the standard logical operators for numeric comparisons as well as logical operators such as negations, AND, and OR that can be used with Boolean types.

25.1. Logical Operators

Recall that Java has Boolean types built-in to the language using either the primitive type, `boolean` or its wrapper class `Boolean`. Moreover, the keywords `true` and `false` can be used to assign and check values. Because Java has Boolean types, it does not allow you to mix logical operators with numeric types. That is, code like the following is invalid.

```
1 int a = 10;
2 boolean b = true;
3 boolean result = (a || b); //compilation error
```

The standard numeric comparison operators are also supported. Consider the following code snippet:

```
1 int a = 10;
2 int b = 20;
3 int c = 10;
4 boolean x = true;
5 boolean y = false;
```

The six standard comparison operators are presented in Table 25.1 using these variables as examples. The comparison operators are the same when used with `double` types as well and `int` types and `double` types can be compared with each other without type casting.

Furthermore, because of autoboxing and unboxing, the wrapper classes for numeric types can be compared using the same operators. For example:

Name	Operator Syntax	Examples	Value
Equals	<code>==</code>	<code>a == 10</code> <code>b == 10</code> <code>a == b</code> <code>a == c</code>	<i>true</i> <i>false</i> <i>false</i> <i>true</i>
Not Equals	<code>!=</code>	<code>a != 10</code> <code>b != 10</code> <code>a != b</code> <code>a != c</code>	<i>false</i> <i>true</i> <i>true</i> <i>false</i>
Strictly Less Than	<code><</code>	<code>a < 15</code> <code>a < 5</code> <code>a < b</code> <code>a < c</code>	<i>true</i> <i>false</i> <i>true</i> <i>false</i>
Less Than Or Equal To	<code><=</code>	<code>a <= 15</code> <code>a <= 5</code> <code>a <= b</code> <code>a <= c</code>	<i>true</i> <i>false</i> <i>true</i> <i>true</i>
Strictly Greater Than	<code>></code>	<code>a > 15</code> <code>a > 5</code> <code>a > b</code> <code>a > c</code>	<i>false</i> <i>true</i> <i>false</i> <i>false</i>
Greater Than Or Equal To	<code>>=</code>	<code>a >= 15</code> <code>a >= 5</code> <code>a >= b</code> <code>a >= c</code>	<i>false</i> <i>true</i> <i>false</i> <i>true</i>

Table 25.1.: Comparison Operators in Java

Operator	Operator Syntax	Examples	Values
Negation	!	!x !y	false true
AND	&&	x && true x && y	true false
OR		x false x y	true false

Table 25.2.: Logical Operators in Java

```

1  int a = 10;
2  Integer b = 20;
3  Double x = 3.14;
4  boolean r;
5  r = (a < b);
6  r = (a >= b);
7  r = (x == 2.71);

```

The three basic logical operators are also supported as described in Table 25.2 using the same code snippet variable values as examples.

25.1.1. Order of Precedence

At this point it is worth summarizing the order of precedence of all the operators that we've seen so far including assignment, arithmetic, comparison, and logical. Since all of these operators could be used in one statement, for example,

```
(b*b < 4*a*c || a == 0 || args.length != 4)
```

it is important to understand the order in which each one gets evaluated. Table 25.3 summarizes the order of precedence for the operators seen so far. This is not an exhaustive list of Java operators.

25.1.2. Comparing Strings and Characters

The comparison operators in Table 25.1 can also be used for *single characters* because of the nature of the ASCII text table (see Table 2.4). Each alphanumeric character, including the various symbols and whitespace characters, is associated with an integer 0–127. We can therefore write statements like ('A' < 'a'), which is *true* since uppercase letters are ordered before lowercase letters in the ASCII table ('A' is 65 and 'a' is 97 and so 65 < 97 is *true*). Several more examples can be found in Table 25.4.

Numeric comparison operators *cannot* be used to compare strings in Java. For example,

	Operator(s)	Associativity	Notes
Highest	<code>++</code> , <code>--</code>	left-to-right	postfix increment operators
	<code>-</code> , <code>!</code>	right-to-left	unary negation operator, logical not
	<code>*</code> , <code>/</code> , <code>%</code>	left-to-right	
	<code>+</code> , <code>-</code>	left-to-right	addition, subtraction
	<code><</code> , <code><=</code> , <code>></code> , <code>>=</code>	left-to-right	comparison
	<code>==</code> , <code>!=</code>	left-to-right	equality, inequality
	<code>&&</code>	left-to-right	logical AND
	<code> </code>	left-to-right	logical OR
Lowest	<code>=</code> , <code>+=</code> , <code>-=</code> , <code>*=</code> , <code>/=</code>	right-to-left	assignment and compound assignment operators

Table 25.3.: Operator Order of Precedence in Java. Operators on the same level have equivalent order and are performed in the associative order specified.

Comparison Example	Result
<code>('A' < 'a')</code>	<i>true</i>
<code>('A' == 'a')</code>	<i>false</i>
<code>('A' < 'Z')</code>	<i>true</i>
<code>('0' < '9')</code>	<i>true</i>
<code>('\\n' < 'A')</code>	<i>true</i>
<code>(' ' < '\\n')</code>	<i>false</i>

Table 25.4.: Character comparisons in Java

we could *not* code something like `("aardvark" < "zebra")`. The Java compiler would not allow you to do this because the comparison operator is for numeric types *only*. However, the following code *would* compile and run:

```

1 String s = "aardvark";
2 String t = "zebra";
3 boolean b = (s == t);

```

but it wouldn't necessarily give you what you want. To understand why this is okay, recall that a `String` is an object; the `s` and `t` variables are *references* to that object in memory. When we use the equality comparison, `==` we're asking if `s` and `t` are the *same memory address*. In this case, likely they are not and so the result is `false`. However, similar code, for example,

```

1 String s = new String("liger");
2 String t = new String("liger");
3 boolean b = (s == t);

```

would also result in `false` because `s` and `t` represent different strings in memory,

even though they have the same sequence of characters. We'll explore how to properly compare strings later. For now, avoid using the comparison operators with strings.

25.2. If, If-Else, If-Else-If Statements

Conditional statements in Java utilize the keywords `if`, `else`, and `else if`. Conditions are placed inside parentheses immediately after the `if` and `else if` keywords. Examples of all three can be found in Code Sample 25.1.

```

1  //example of an if statement:
2  if(x < 10) {
3      System.out.println("x is less than 10");
4  }
5
6  //example of an if-else statement:
7  if(x < 10) {
8      System.out.println("x is less than 10");
9  } else {
10     System.out.println("x is 10 or more");
11 }
12
13 //example of an if-else-if statement:
14 if(x < 10) {
15     System.out.println("x is less than 10");
16 } else if(x == 10) {
17     System.out.println("x is equal to ten");
18 } else {
19     System.out.println("x is greater than 10");
20 }
```

Code Sample 25.1: Examples of Conditional Statements in Java

Some observations about the syntax: the statement, `if(x < 10)` does not have a semicolon at the end. This is because it is a conditional statement that determines the flow of control and *not* an executable statement. Therefore, no semicolon is used. Suppose we made a mistake and *did* include a semicolon:

```

1  int x = 15;
2  if(x < 10); {
3      System.out.println("x is less than 10");
4  }
```

Some compilers may give a warning, but this is valid Java; it will compile and it will run. However, it will end up printing `x is less than 10`, even though $x = 15$! Recall that

25. Conditionals

a conditional statement *binds* to the executable statement or code block *immediately* following it. In this case, we've provided an *empty* executable statement ended by the semicolon. The code is essentially equivalent to

```
1 int x = 15;
2 if(x < 10) {
3 }
4 System.out.println("x is less than 10");
```

Which is obviously not what we wanted. The semicolon ended up binding to the empty executable statement, and the code block containing the print statement immediately followed, but was *not* bound to the conditional statement which is why the print statement executed regardless of the value of x .

Another convention that we've used in our code is where we have placed the curly brackets. First, if a conditional statement is bound to only one statement, the curly brackets are not necessary. However, it is best practice to include them even if they are not necessary and we'll follow this convention. Second, the opening curly bracket is on the same line as the conditional statement while the closing curly bracket is indented to the same level as the start of the conditional statement. Moreover, the code inside the code block is indented. If there were more statements in the block, they would have all been at the same indentation level.

25.3. Examples

25.3.1. Computing a Logarithm

The logarithm of x is the exponent that some *base* must be raised to get x . The most common logarithm is the natural logarithm, $\ln(x)$ which is base $e = 2.71828\dots$. But logarithms can be in any base $b > 1$ ¹ What if we wanted to compute $\log_2(x)$? Or $\log_\pi(x)$? Let's write a program that will prompt the user for a number x and a base b and computes $\log_b(x)$.

Arbitrary bases can be computed using the change of base formula:

$$\log_b(x) = \frac{\log_a(x)}{\log_a(b)}$$

If we can compute *some* base a , then we can compute any base b . Fortunately we have such a solution. Recall that the standard library provides a function to compute the natural logarithm, `Math.log()`. This is one of the fundamentals of problems solving: if a solution already exists, use it. In this case, a solution exists for a different, but similar problem (computing the natural logarithm), but we can *adapt* the solution using the

¹Bases can also be $0 < b < 1$, but we'll restrict our attention to increasing functions only.

change of base formula. In particular, if we have variables `b` (base) and `x`, we can compute $\log_b(x)$ using

```
Math.log(x) / Math.log(b)
```

But wait: we have a problem similar to the examples in the previous section. The user could enter invalid values such as $b = -10$ or $x = -2.54$ (logarithms are undefined for non-positive values in any base). We want to ensure that $b > 1$ and $x > 0$. With conditionals, we can now do this. Once we have read in the input from the user we can make a check for good input using an `if` statement.

```
1  if(x <= 0 || b <= 1) {
2      System.out.println("Error: bad input!");
3      System.exit(1);
4  }
```

This code has something new: `System.exit(1)`. The `exit` function immediately terminates the program regardless of the rest of the code that may remain. The argument passed to `exit` is an integer that represents an *error code*. The convention is that zero indicates “no error” while non-zero values indicate some error. This is a simple way of performing *error handling*: if the user provides bad input, we inform them and quit the program, forcing them to run it again and provide good input. By prematurely terminating the program we avoid any illegal operation that would give a bad result.

Alternatively, we could have split the conditions into two statements and given a more descriptive error message. We use this design in the full program which can be found in Code Sample 25.2. The program also takes the input as command line arguments. Now that we have conditionals, we can actually check that the correct number of arguments was provided by the user and quit in the event that they don’t provide the correct number.

25.3.2. Life & Taxes

Let’s adapt the conditional statements we developed in Section 3.6.4 into a full Java program. The first thing we need to do is establish the variables we’ll need and read them in from the user. At the same time we can check for bad input (negative values) for both the inputs.

25. Conditionals

```
1 Scanner s = new Scanner(System.in);
2 double income, tax, numChildren, credit;
3
4 System.out.println("Please enter your Adjusted Gross Income: ");
5 income = s.nextDouble();
6
7 System.out.println("How many children do you have?");
8 numChildren = s.nextDouble();
9
10 if(income < 0 || numChildren < 0) {
11     System.out.println("Invalid inputs");
12     System.exit(1);
13 }
```

Next, we can code a series of if-else-if statements for the income range. By placing the ranges in increasing order, we only need to check the upper bounds just as in the original example.

```
1 if(income <= 18150) {
2     baseTax = income * .10;
3 } else if(income <= 73800) {
4     baseTax = 1815 + (income - 18150) * .15;
5 } else if(income <= 148850) {
6     ...
7 } else {
8     baseTax = 127962.50 + (income - 457600) * .396;
9 }
```

Next we compute the child tax credit, taking care that it does not exceed \$3,000. A conditional based on the number of children should suffice as at this point in the program we already know it is zero or greater.

```
1 if(numChildren <= 3) {
2     credit = numChildren * 1000;
3 } else {
4     credit = 3000;
5 }
```

Finally, we need to ensure that the credit does not exceed the total tax liability (the credit is non-refundable, so if the credit is greater, the tax should only be zero, not negative).

```
1 if(baseTax - credit >= 0) {
2     totalTax = baseTax - credit;
3 } else {
4     totalTax = 0;
5 }
```

The full program is presented in Code Sample [25.3](#).

25.3.3. Quadratic Roots Revisited

Let's return to the quadratic roots program we previously designed that uses the quadratic equation to compute the roots of a quadratic polynomial by reading coefficients a, b, c in from the user. One of the problems we had previously identified is if the user enters "bad" input: if $a = 0$, we would end up dividing by zero; if $b^2 - 4ac < 0$ then we would have complex roots. With conditionals, we can now check for these issues and exit with an error message.

Another potential case we might want to handle differently is when there is only one distinct root ($b^2 - 4ac = 0$). In that case, the quadratic formula simplifies to $\frac{-b}{2a}$ and we can print a different, more specific message to the user. The full program can be found in Code Sample [25.4](#).

```

1  /**
2   * This program computes the logarithm base b (b > 1)
3   * of a given number x > 0
4   */
5  public class Logarithm {
6
7      public static void main(String args[]) {
8
9          double b, x, result;
10         if(args.length != 2) {
11             System.out.println("Usage: b x");
12             System.exit(1);
13         }
14
15         b = Double.parseDouble(args[0]);
16         x = Integer.parseInt(args[1]);
17
18         if(x <= 0) {
19             System.out.println("Error: x must be greater than zero");
20             System.exit(1);
21         }
22         if(b <= 1) {
23             System.out.println("Error: base must be greater than one");
24             System.exit(1);
25         }
26
27         result = Math.log(x) / Math.log(b);
28         System.out.printf("log_(%f)(%f) = %f\n", b, x, result);
29
30     }
31
32 }

```

Code Sample 25.2: Logarithm Calculator Program in Java

```

1  import java.util.Scanner;
2
3  public class Taxes {
4
5      public static void main(String args[]) {
6
7          Scanner s = new Scanner(System.in);
8          double income, baseTax, totalTax, numChildren, credit;
9
10         System.out.println("Please enter your Adjusted Gross Income: ");
11         income = s.nextDouble();
12
13         System.out.println("How many children do you have?");
14         numChildren = s.nextDouble();
15
16         if(income < 0 || numChildren < 0) {
17             System.out.println("Invalid inputs");
18             System.exit(1);
19         }
20
21         if(income <= 18150) {
22             baseTax = income * .10;
23         } else if(income <= 73800) {
24             baseTax = 1815 + (income - 18150) * .15;
25         } else if(income <= 148850) {
26             baseTax = 10162.50 + (income - 73800) * .25;
27         } else if(income <= 225850) {
28             baseTax = 28925.00 + (income - 148850) * .28;
29         } else if(income <= 405100) {
30             baseTax = 50765.00 + (income - 225850) * .33;
31         } else if(income <= 457600) {
32             baseTax = 109587.50 + (income - 405100) * .35;
33         } else {
34             baseTax = 127962.50 + (income - 457600) * .396;
35         }
36
37         if(numChildren <= 3) {
38             credit = numChildren * 1000;
39         } else {
40             credit = 3000;
41         }
42
43         if(baseTax - credit >= 0) {
44             totalTax = baseTax - credit;
45         } else {
46             totalTax = 0;
47         }
48
49         System.out.printf("AGI:           $%10.2f\n", income);
50         System.out.printf("Tax:           $%10.2f\n", baseTax);
51         System.out.printf("Credit:        $%10.2f\n", credit);
52         System.out.printf("Tax Liability: $%10.2f\n", totalTax);
53
54     }
55
56 }

```

Code Sample 25.3: Tax Program in Java

```

1  /**
2   * This program computes the roots to a quadratic equation
3   * using the quadratic formula.
4   */
5  public class Roots {
6
7      public static void main(String args[]) {
8          double a, b, c, root1, root2;
9
10         if(args.length != 3) {
11             System.err.println("Usage: a b c\n");
12             System.exit(1);
13         }
14
15         a = Double.parseDouble(args[0]);
16         b = Double.parseDouble(args[1]);
17         c = Double.parseDouble(args[2]);
18
19         if(a == 0) {
20             System.err.println("Error: a cannot be zero");
21             System.exit(1);
22         } else if(b*b < 4*a*c) {
23             System.err.println("Error: cannot handle complex roots\n");
24             System.exit(1);
25         } else if(b*b == 4*a*c) {
26             root1 = -b / (2*a);
27             System.out.printf("Only one distinct root: %f\n", root1);
28         } else {
29             root1 = (-b + Math.sqrt(b*b - 4*a*c) ) / (2*a);
30             root2 = (-b - Math.sqrt(b*b - 4*a*c) ) / (2*a);
31
32             System.out.printf("The roots of %fx^2 + %fx + %f are: \n",
33                             a, b, c);
34             System.out.printf("  root1 = %f\n", root1);
35             System.out.printf("  root2 = %f\n", root2);
36         }
37     }
38
39 }

```

Code Sample 25.4: Quadratic Roots Program in Java With Error Checking

26. Loops

Java supports while loops, for loops, and do-while loops using the keywords `while`, `for`, and `do` (along with another `while`). Continuation conditions for loops are enclosed in parentheses, `(...)` and the blocks of code associated with the loop are enclosed in curly brackets.

26.1. While Loops

Code Sample 26.1 contains an example of a basic while loop in C. Just as with conditional statements, our code styling places the opening curly bracket on the same line as the `while` keyword and continuation condition. The inner block of code is also indented and all lines in the block are indented to the same level.

```
1  int i = 1; //Initialization
2  while(i <= 10) { //continuation condition
3      //perform some action
4      i++; //iteration
5  }
```

Code Sample 26.1: While Loop in Java

In addition, the continuation condition does *not* contain a semicolon since it is not an executable statement. Just as with an if-statement, if we *had* placed a semicolon it would have led to unintended results. Consider the following:

```
1  while(i <= 10); {
2      //perform some action
3      i++; //iteration
4  }
```

A similar problem occurs: the `while` keyword and continuation condition bind to the next executable statement or code block. As a consequence of the semicolon, the executable statement that gets bound to the while loop is *empty*. What happens is even worse: the program will enter an infinite loop. To see this, the code is essentially equivalent to the following:

26. Loops

```
1 while(i <= 10) {  
2 }  
3 {  
4     //perform some action  
5     i++; //iteration  
6 }
```

In the while loop, we never increment the counter variable `i`, the loop does nothing, and so the computation will continue on forever! Some compilers will warn you about this, others will not. It is valid Java and it will compile and run, but obviously won't work as intended. Avoid this problem by using proper syntax.

Another common use case for a while loop is a flag-controlled loop in which we use a Boolean flag rather than an expression to determine if a loop should continue or not. An example can be found in Code Sample 26.2.

```
1 int i = 1;  
2 boolean flag = true;  
3 while(flag) {  
4     //perform some action  
5     i++; //iteration  
6     if(i>10) {  
7         flag = false;  
8     }  
9 }
```

Code Sample 26.2: Flag-controlled While Loop in Java

26.2. For Loops

For loops in Java use the familiar syntax of placing the initialization, continuation condition, and iteration on the same line as the keyword `for`. An example can be found in Code Sample 26.3.

```
1 for(int i=1; i<=10; i++) {  
2     //perform some action  
3 }
```

Code Sample 26.3: For Loop in Java

Again, note the syntax: semicolons are placed at the end of the initialization and continuation condition, but *not* the iteration statement. Just as with while loops, the

opening curly bracket is placed on the same line as the `for` keyword. Code within the loop body is indented, all at the same indentation level.

Another observation: the declaration of the counter variable `i` was done in the initialization statement. This scopes the variable to the loop itself. The variable `i` is valid inside the loop body, but will be out-of-scope *after* the loop body. It is possible to declare the variable prior to the loop, but the variable `i` would have a much larger scope. It is best practice to limit the scope of variables only to where they are needed. Thus, we will write our loops as above.

26.3. Do-While Loops

Finally, Java does support do-while loops. Recall that the difference between a while loop and a do-while loop is when the continuation condition is checked. For a while loop it is *prior* to the beginning of the loop body and in a do-while loop it is at the *end* of the loop. This means that a do-while always executes *at least once*. An example can be found in Code Sample 26.4.

```

1  int i;
2  do {
3      //perform some action
4      i++;
5  } while(i <= 10);

```

Code Sample 26.4: Do-While Loop in Java

Note the syntax and style: the opening curly bracket is again on the same line as the keyword `do`. The `while` keyword and continuation condition are on the same line as the closing curly bracket. In a slight departure from consistent syntax, a semicolon *does* appear at the end of the continuation condition even though it is not an executable statement.

26.4. Enhanced For Loops

Java also supports foreach loops (which were introduced in JDK 1.5.0) which Java refers to as “Enhanced For Loops”. Foreach loops allow you to iterate over each element in a collection without having to define an index variable or otherwise “get” each element. We’ll revisit these concepts in detail in Chapter 29, but let’s take a look at a couple of examples.

An enhanced for loop in Java still uses the keyword `for` but uses different syntax for its control. The example in Code Sample 26.5 illustrates this syntax: `(int a : arr)`.

26. Loops

The last element of this syntax is a reference to the collection that we want to iterate over. The first part is the *type* and local reference variable that the loop will use.

```
1  int arr[] = {10, 20, 8, 42};
2  int sum = 0;
3  for(int a : arr) {
4      sum += a;
5  }
```

Code Sample 26.5: Enhanced For Loops in Java Example 1

The code `(int a : arr)` should be read as “for each integer element `a` in the collection `arr`...” Within the enhanced for loop, the variable `a` will be automatically updated for you on each iteration. Outside the loop body, the variable `a` is out-of-scope.

Java allows you to use an enhanced for loop with any array or collection (technically, anything that implements the `Iterable` interface). One example is a `List`, an ordered collection of elements. Code Sample 26.6 contains an example.

```
1  List<Integer> list = Arrays.asList(10, 20, 8, 42);
2  int sum = 0;
3  for(Integer a : list) {
4      sum += a;
5  }
```

Code Sample 26.6: Enhanced For Loops in Java Example 2

26.5. Examples

26.5.1. Normalizing a Number

Let’s revisit the example from Section 4.1.1 in which we *normalize* a number by continually dividing it by 10 until it is less than 10. The code in Code Sample 26.7 specifically refers to the value 32145.234 but would work equally well with any value of `x`.

```
1  double x = 32145.234;
2  int k = 0;
3  while(x > 10) {
4      x = x / 10; //or: x /= 10;
5      k++;
6  }
```

Code Sample 26.7: Normalizing a Number with a While Loop in Java

26.5.2. Summation

Let's revisit the example from Section 4.2.1 in which we computed the sum of integers $1 + 2 + \dots + 10$. The code is presented in Code Sample 26.8

```

1  int i;
2  int sum = 0;
3  for(i=1; i<=10; i++) {
4      sum += i;
5  }
```

Code Sample 26.8: Summation of Numbers using a For Loop in Java

Of course we could easily have generalized the code somewhat. Instead of computing a sum up to a particular number, we could have written it to sum up to another variable `n`, in which case the for loop would instead look like the following.

```

1  for(i=1; i<=n; i++) {
2      sum += i;
3  }
```

26.5.3. Nested Loops

Recall that you can write loops within loops. The inner loop will execute fully *for each* iteration of the outer loop. An example of two nested of loops in Java can be found in Code Sample 26.9.

```

1  int i, j;
2  int n = 10;
3  int m = 20;
4  for(i=0; i<n; i++) {
5      for(j=0; j<m; j++) {
6          System.out.printf("(i, j) = (%d, %d)\n", i, j);
7      }
8  }
```

Code Sample 26.9: Nested For Loops in Java

The inner loop execute for $j = 0, 1, 2, \dots, 19 < m = 20$ for a total of 20 times. However, it executes 20 times *for each* iteration of the outer loop. Since the outer loop execute for $i = 0, 1, 2, \dots, 9 < n = 10$, the total number of times the `System.out.printf` statement execute is $10 \times 20 = 200$. In this example, the sequence $(0, 0), (0, 1), (0, 2), \dots, (0, 19), (1, 0), \dots, (9, 19)$ will be printed.

26.5.4. Paying the Piper

Let's adapt the solution for the loan amortization schedule we developed in Section 4.7.3. First, we'll read the principle, terms, and interest as command line inputs.

Adapting the formula for the monthly payment and using the math library's `Math.pow()` function, we get

```
1 double monthlyPayment = (monthlyInterestRate * principle) /
2   (1 - pow( (1 + monthlyInterestRate), -n));
```

However, recall that we may have problems due to accuracy. The monthly payment could come out to be a fraction of a cent, say \$43.871. For accuracy, we need to ensure that all of the figures for currency are rounded to the nearest cent. The standard math library does have a `Math.round()` function, but it only rounds to the nearest whole number, not the nearest 100th.

However, we can *adapt* the “off-the-shelf” solution to fit our needs. If we take the number, multiply it by 100, we get (say) 4387.1 which we can now round to the nearest whole number, giving us 4387. We can then divide by 100 to get a number that has been rounded to the nearest 100th! In Java, we could simply do the following.

```
monthlyPayment = Math.round(monthlyPayment * 100.0) / 100.0;
```

We can use the same trick to round the monthly interest payment and any other number expected to be whole cents. To output our numbers, we use `System.out.printf` and take care to align our columns to make it look nice. To finish our adaptation, we handle the final month separately to account for an over/under payment due to rounding. The full solution can be found in Code Sample 26.10.

```

1 public class LoanAmortization {
2
3     public static void main(String args[]) {
4
5         if(args.length != 4) {
6             System.err.println("Usage: principle apr terms");
7             System.exit(1);
8         }
9
10        double principle = Double.parseDouble(args[0]);
11        double apr = Double.parseDouble(args[1]);
12        int n = Integer.parseInt(args[2]);
13
14        double balance = principle;
15        double monthlyInterestRate = apr / 12.0;
16
17        //monthly payment
18        double monthlyPayment = (monthlyInterestRate * principle) /
19            (1 - Math.pow( (1 + monthlyInterestRate), -n));
20        //round to the nearest cent
21        monthlyPayment = Math.round(monthlyPayment * 100.0) / 100.0;
22
23        System.out.printf("Principle: $%.2f\n", principle);
24        System.out.printf("APR: %.4f%%\n", apr*100.0);
25        System.out.printf("Months: %d\n", n);
26        System.out.printf("Monthly Payment: $%.2f\n", monthlyPayment);
27
28        //for the first n-1 payments in a loop:
29        for(int i=1; i<n; i++) {
30            // compute the monthly interest, rounded:
31            double monthlyInterest =
32                Math.round( (balance * monthlyInterestRate) * 100.0) / 100.0;
33            // compute the monthly principle payment
34            double monthlyPrinciplePayment = monthlyPayment - monthlyInterest;
35            // update the balance
36            balance = balance - monthlyPrinciplePayment;
37            // print i, monthly interest, monthly principle, new balance
38            System.out.printf("%d\t$%10.2f  $%10.2f  $%10.2f\n", i, monthlyInterest,
39                monthlyPrinciplePayment, balance);
40        }
41
42        //handle the last month and last payment separately
43        double lastInterest = Math.round(
44            (balance * monthlyInterestRate) * 100.0) / 100.0;
45        double lastPayment = balance + lastInterest;
46
47        System.out.printf("Last payment = $%.2f\n", lastPayment);
48    }
49 }
50
51 }

```

Code Sample 26.10: Loan Amortization Program in Java

27. Methods

As an object-oriented programming language, functions in Java are usually referred to as *methods* and are essential to writing programs. The distinction is that a function is usually a standalone element while methods are functions that are members of a class. In Java, since everything is a class or belongs to a class, standalone functions cannot be defined.

In Java you can define your own methods, but they need to be placed within a class. Usually methods that act on data in the class (or instances of the class, see Chapter ??) or have common functionality are placed into one class. For example, all the basic math methods are all part of the `java.lang.Math` class. It is not uncommon to place similar methods together into one “utility” class.

Java supports method overloading, so within the same class you can define multiple methods with the same name as long as they differ in either the number of type of parameters. For example, in the `java.lang.Math` class, there are 3 versions of the absolute value method, `abs()`, one that takes/returns an `int`, one that takes/returns a `double` and one for `float` types. Naming conflicts can easily be solved by ensuring that you place your methods in a class/package that is unique to your application.

In Java, the 8 primitive types (`int`, `double`, `char`, `boolean`, etc.) are passed by value. All object types, however, such as the wrapper classes `Integer`, `Double` as well as `String`, etc. are passed by reference. That is, the memory address in the JVM is passed to the method. This is done for efficiency, for objects that are “large” it would be inefficient to copy the entire object into the call stack in order to pass it to a method.

However, though object types are passed by reference, the method cannot necessarily change them. Recall that the wrapper classes `Integer`, `Double` and the `String` class are all *immutable*, meaning that once created they cannot be modified. Thus, even though they are passed by reference, the method that receives them cannot change them.

There are many *mutable* objects in Java. The `StringBuilder` class for example is a mutable object. If you pass a `StringBuilder` instance to a method, that method is free to invoke mutator methods (any methods that *change* the object’s state). Since it is the *same* object as in the calling method, the calling method can “see” those changes.

As of Java 5, you can write and use vararg methods. The `System.out.printf()` method is a prime example of this. However, we will not discuss in detail how to do this. Instead, refer to standard Java documentation. Finally, parameters are not optional in

Java. This is because Java supports method overloading. You can write multiple versions of the same method that each take a different number of arguments. You can even design them so that the more specific versions (with fewer arguments) invoke the more general versions (with more arguments), passing in sensible “defaults.” when doing so.

27.1. Defining Methods

Defining methods is fairly straightforward. First you create class to place them in. Then you provide the method signature along with the body of the method. In addition, there are several *modifiers* that you can place in the method signature to specify its *visibility* and whether or not the method “belongs” to the class or to instances of the class. This is a concept we’ll explore in Chapter ???. For now, we’ll only focus on what is needed to get started.

Typically, the documentation for methods is included with the method definition using “Javadoc” style comments. Consider the following examples.

```

1  /**
2   * Computes the sum of the two arguments.
3   * @param a
4   * @param b
5   * @return the sum, <code>a + b</code>
6   */
7  public static int sum(int a, int b) {
8      return (a + b);
9  }
10
11 /**
12  * Computes the Euclidean distance between the 2-D points,
13  * (x1,y1) and (x2,y2).
14  * @param x1
15  * @param y1
16  * @param x2
17  * @param y2
18  * @return
19  */
20 public static double getDistance(double x1, double y1,
21                                 double x2, double y2) {
22     double xDiff = (x1-x2);
23     double yDiff = (y1-y2);
24     return Math.sqrt( xDiff * xDiff + yDiff * yDiff);
25 }
26
27 /**
28  * Computes a monthly payment for a loan with the given
29  * principle at the given APR (annual percentage rate) which
30  * is to be repaid over the given number of terms.
31  * @param principle - the amount borrowed
32  * @param apr - the annual percentage rate
33  * @param terms - number of terms (usually months)
34  * @return
35  */
36 public static double getMonthlyPayment(double principle,
37                                       double apr, int terms) {
38     double rate = (apr / 12.0);
39     double payment = (principle * rate) / (1-Math.pow(1+rate, -terms));
40     return payment;
41 }

```

In each of the examples above, the first modifier keyword we used was `public`. This makes the method visible to all other parts of the code base. Any other piece of code

can invoke the method and take advantage of the functionality it provides. Alternatively, we could have used the keywords `private`, to make it only visible to other methods in the same class, `protected` or “package protected” by omitting the modifier altogether. We’ll discuss these in detail later on. We’ll mostly want our methods to be available, so we’ll make most of them `public`.

The second modifier is `static` which makes it so that the method belongs to the class itself rather than instances of the class. We’ll discuss objects and instances in detail later on. For now, we’ll simply make all of our methods `static`.

After the modifiers, we provide the method signature including the return type, its identifier (name), and its parameter list. Method names must follow the same naming rules as variables: they must begin with an alphabetic character and may contain alphanumeric characters as well as underscores. However, using modern coding conventions we usually name methods using lower camel casing.

Immediately after the signature we provide a method body which contains the code that will be run upon invocation of the method. The method body is enclosed using opening/closing curly brackets.

27.1.1. Void Methods

The keyword `void` can be used in Java to indicate a method does *not* return a value, in which case it is called a “void method.” Though it is not necessary, it is still good practice to include a `return` statement.

```
1 public static void printCopyright()
2     System.out.println("(c) Bourke 2015");
3 }
```

In the example above, we’ve also illustrated how to define a method that has no inputs.

27.1.2. Using Methods

Once a method has been defined in a class, you can make use of the method as follows. First, you may need to import the class itself depending on where it is. For example, suppose that the examples we’ve presented so far are contained in a class named `Utils` (short for “utilities”) which is in a package named `unl.cse`. Then in the class in which we want to call some of these functions we would import it using

```
import unl.cse.Utils;
```

prior to the class declaration. Once the class has been imported, we can invoke a method in the class by first referencing the class and using the *dot operator* to access one of its methods. For example,

```

1  int a = 10, b = 20;
2  int c = Utils.sum(a, b); //c contains the value 30
3
4  //invoke a method with literal values:
5  double dist = Utils.getDistance(0.0, 0.0, 10.0, 20.0);
6
7  //invoke a method with a combination:
8  double p = 1500.0;
9  double r = 0.05;
10 double monthlyPayment = Utils.getMonthlyPayment(p, r, 60);

```

The `Utils.methodName()` syntax is used because the methods are `static`—they belong to the class and so must be invoked *through* the class using the class's name. We've previously seen this syntax when using `System.` or `Math.` with the standard JDK library functions.

27.1.3. Passing By Reference

Java does not allow you the ability to specify if a variable is passed by reference or by value. Instead, all primitive types are passed by value while all object types are passed by reference. Moreover, most of the built-in types such as `Integer` and `String` are immutable, even though they are passed by reference, any method that receives them cannot change them. Only if the passed object is *mutable* can the method make changes to it (by invoking its methods).

As an example, consider the following piece of code. The `StringBuilder` class is a mutable string object. You can *change* the string contents stored in a `StringBuilder` by calling one of its many methods such as `append()`, which will add whatever string you give it to the end.

In the main method, we create two objects, a `String` and a `StringBuilder` and pass it to a method that makes changes to both by appending `" world!"` to them. Understand what happens here though. The first line in `change()` actually creates a *new* string and then changes what the parameter variable `s` references. The reference to the original string, `"Hello"` is lost and replaced with the new string. In contrast, the `StringBuilder` instance is actually changed via its `append()` method but is *still the same* object.

```

1  public class Mutability {
2
3      public static void change(String s, StringBuilder sb) {
4          s = s + " world!";
5          sb.append(" world!");
6
7          System.out.println("change: s = " + s);
8          System.out.println("change: sb = " + sb);
9      }
10
11     public static void main(String args[]) {
12         String a = "Hello";
13         StringBuilder b = new StringBuilder("Hello");
14
15         System.out.println("main: s = " + a);
16         System.out.println("main: b = " + b);
17
18         change(a, b);
19
20         System.out.println("main after: s = " + a);
21         System.out.println("main after: b = " + b);
22
23     }
24 }

```

To see this, observe the following output. When we return to the main method, the original string `s` is unchanged (since it was immutable). However, the `StringBuilder` has been changed by the method.

TODO: figure?

```

main: s = Hello
main: b = Hello
change: s = Hello world!
change: sb = Hello world!
main after: s = Hello
main after: b = Hello world!

```

27.2. Examples

27.2.1. Generalized Rounding

Recall that the standard math library provides a `Math.round()` method that rounds a number to the nearest whole number. Often, we've had need to round to cents as well.

We now have the ability to write a method to do this for us. Before we do, however, let's think more generally. What if we wanted to round to the nearest tenth? Or what if we wanted to round to the nearest 10s or 100s place? Let's write a general purpose rounding method that allows us to specify *which* decimal place to round to.

The most natural input values would be to specify the place using an integer exponent. That is, if we wanted to round to the nearest tenth, then we would pass it -1 as $0.1 = 10^{-1}$, -2 if we wanted to round to the nearest 100th, etc. On the positive end passing in 0 would correspond to the usual round function, 1 to the nearest 10s spot, and so on.

Moreover, we could demonstrate good code reuse (as well as procedural abstraction) by *scaling* the input value and reusing the functionality already provided in the math library's `Math.round()` method. We could further define a `roundToCents()` method that used our generalized round method. Finally, we could place all of these methods into `RoundUtils` Java class for good organization.

```

1  package unl.cse;
2
3  /**
4   * A collection of rounding utilities
5   *
6   */
7  public class RoundUtils {
8
9      /**
10     * Rounds to the nearest digit specified by the place
11     * argument. In particular to the (10place)-th digit
12     *
13     * @param x the number to be rounded
14     * @param place the place to be rounded to
15     * @return
16     */
17     public static double roundToPlace(double x, int place) {
18         double scale = Math.pow(10, -place);
19         double rounded = Math.round(x * scale) / scale;
20         return rounded;
21     }
22
23     /**
24     * Rounds to the nearest cent (100th place)
25     *
26     * @param x
27     * @return
28     */
29     public static double roundToCents(double x) {
30         return RoundUtils.roundToPlace(x, -2);
31     }
32
33 }

```

Observe that this class does not contain a `main()` method. That means that this class is *not* executable itself. It only provides functionality to other classes in the code base.

28. Error Handling & Exceptions

Java supports error handling through the use of exceptions. Java has many different predefined types of exceptions that you can freely use in your own code. It also allows you to define your own exception types by creating new classes that *inherit* from the predefined classes. Java uses the standard `try-catch-finally` control structure to handle exceptions and allows you to `throw` your own exceptions.

28.1. Exceptions

Java defines a base class named `Throwable` that an object type that can be thrown using the keyword `throw`. There are two major subtypes of `Throwable`: `Error` and `Exception`. The `Error` class is used primarily for *fatal* errors such as the JVM running out of memory or some other extreme case that your code cannot reasonably be expected to recover from.

There are dozens of types of exceptions that are subclasses of the standard Java `Exception` class defined by the JDK including `IOException` (and its subclasses such as `FileNotFoundException`) or `SQLException` (when working with [Structured Query Language \(SQL\)](#) databases).

An important subclass of `Exception` is `RuntimeException` which represent *unchecked* exceptions that do *not* need to be explicitly caught (see Section 28.1.4 below for further details). We'll mostly focus on this type of exception.

28.1.1. Catching Exceptions

To catch an exception in Java you can use the standard `try-catch` control block (and optionally use the `finally` block to clean up any resources). Let's take, for example, the simple task of reading input from a user using `Scanner` and manually parsing its value into an integer. If the user enters a non-numeric value, parsing will fail and result in a `NumberFormatException` that we can then catch and handle. For example,

```

1 Scanner s = new Scanner(System.in);
2 int n = 0;
3
4 try {
5     String input = s.next();
6     n = Integer.parseInt(input);
7 } catch (NumberFormatException nfe) {
8     System.err.println("You entered invalid data!");
9     System.exit(1);
10 }

```

In this example, we've simply displayed an error message to the standard error output and exited the program. That is, we've made the design decision that this error should be fatal. We could have chosen to handle this error differently in the `catch` block.

The code above could have resulted in other exceptions. For example if the `Scanner` failed to read the next token from the standard input, it would have thrown a `NoSuchElementException`. We can add as many `catch` blocks as we want to handle each exception differently.

```

1 Scanner s = new Scanner(System.in);
2 int n = 0;
3
4 try {
5     String input = s.next();
6     n = Integer.parseInt(input);
7 } catch (NumberFormatException nfe) {
8     System.err.println("You entered invalid data!");
9     System.exit(1);
10 } catch (NoSuchElementException nsee) {
11     System.err.println("Input reading failed, using default...");
12     n = 20; //a default value
13 } catch (Exception e) {
14     System.err.println("A general exception occurred");
15     e.printStackTrace();
16     System.exit(1);
17 }

```

Each `catch` block catches a different type of exception. Thus, the name of the variable that holds each exception must be different in the chain of `catch` blocks; `nfe`, `nsee`, `e`.

Note that the last `catch` block was written to catch a generic `Exception`. This last block will essentially catch any other type of exception. Much like an `if-else-if` statement, the first type of exception that is caught is the block that will be executed and they are all mutually exclusive. Thus, a “catch all” block like this should always be the last `catch` block. The most specific types of exceptions should be caught first and

the most general types should be caught last.

28.1.2. Throwing Exceptions

We can also manually `throw` an exception if we need to. For example, we can `throw` a generic `RuntimeException` using the following.

```
1 throw new RuntimeException("Something went wrong");
```

By using a generic `RuntimeException`, we can only attach a message to the exception (which can be printed by code that catches the exception). If we want more fine-grained control over the type of exceptions, we need to define our own exceptions.

28.1.3. Creating Custom Exceptions

To create your own exceptions, you need to create a new class to represent the exception and make it *extends* `RuntimeException` by using the keyword `extends`. This makes your exception a subclass or *subtype* of the `RuntimeException`. This is a concept known as *inheritance* in OOP.

Consider the example in the previous chapter of computing the roots of a quadratic polynomial. One possible error situation is when the roots are complex numbers. We could define a new Java class as follows.

```
1 public class ComplexRootException extends RuntimeException {
2
3     /**
4      * Constructor that takes an error message
5      */
6     public ComplexRootException(String errorMessage) {
7         super(errorMessage);
8     }
9 }
```

Now in our code we can catch and even throw this new type of exception.

```
1 //throw this exception:
2 if( b*b - 4*a*c < 0) {
3     throw new ComplexRootException("Cannot Handle complex roots");
4 }
```

```

1  try {
2      r1 = getComplexRoot01(a, b, c);
3  } catch (ComplexRootException cre) {
4      //handle the exception here...
5  }

```

28.1.4. Checked Exceptions

A *checked* exception in Java is an exception that *must* be explicitly caught and handled. For example, the generic `Exception` class is a checked exception (others include `IOException`, `SQLException`, etc.). If a checked exception is thrown within a block of code such as a method then it must either be caught and handled within that block of code or the (say) method must be specified to explicitly throw the exception. For example, the method

```

1  public static void processFile() {
2      Scanner s = new Scanner(new File("data.csv"));
3  }

```

would not actually compile because `Scanner` throws a checked `FileNotFoundException`. Either we would have to explicitly `catch` the exception:

```

1  public static void processFile() {
2      Scanner s = null;
3      try {
4          s = new Scanner(new File("data.csv"));
5      } catch (FileNotFoundException e) {
6          //handle the exception here
7      }
8  }

```

or we would need to specify that the method `processFile()` explicitly `throws` the exception:

```

1  public static void processFile() throws FileNotFoundException {
2      Scanner s = new Scanner(new File("data.csv"));
3  }

```

Doing this, however, would force any code that called the `processFile()` method to surround it in a `try-catch` block and explicitly handle it (or once again, throw it back to the calling method).

The point of a checked exception is to force code to deal with potential issues that can be reasonably anticipated (such as the unavailability of a file). However, from another point of view checked exceptions represent the exact opposite goal of error handling. Namely,

that a function or code block can and should *inform* the calling function that an error has occurred, but *not* explicitly make a decision on how to handle the error. A checked exception doesn't make the full decision for the calling function, but it does eliminate *ignoring* the error as an option from the calling function.

Java also supports *unchecked* exceptions which do *not* need to be explicitly caught. For example, `NumberFormatException` or `NullPointerException` are unchecked exceptions. If an unchecked exception is thrown and not caught, it bubbles up through the call stack until some piece of code does catch it. If no code catches it, it results in a fatal error and terminates the execution of the JVM.

The `RuntimeException` class and any of its subclasses are unchecked exceptions. In our `ComplexRootException` example above, because we extended `RuntimeException` we made it an unchecked exception, allowing the calling function to decide not only *how* to handle it, but also whether or not to handle it *at all*. If we had instead decided to extend `Exception` we would have made our exception a checked exception.

There is considerable debate as to whether or not checked exceptions are a good thing (and as to whether or not unchecked exceptions are a good thing). Many feel (the author included) that checked exceptions were a mistake and their usage should be avoided. The rationale behind checked exceptions is summed up in the following quote from the Java documentation [7].

Here's the bottom line guideline: If a client can reasonably be expected to recover from an exception, make it a checked exception. If a client cannot do anything to recover from the exception, make it an unchecked exception

The problem is that the JDK's own design violates this principle. For example, `FileNotFoundException` is a checked exception; the reasoning being that a program could *re-prompt* the user for a different file. The problem is the assumption that the program we are writing is always interactive. In fact most software is *not* interactive and is instead designed to interact with other software. Reprompting is *not* an option in the vast majority of cases.

As another example, consider Java's SQL library which allows you to programmatically connect to an SQL database. Nearly every method in the API explicitly throws a checked `SQLException`. It stretches the imagination to understand how our code or even a user would be able to recover (programmatically at least) from a lost internet connection or a bad password, etc.

In general and in the opinion of this author, you should use unchecked exceptions.

28.2. Enumerated Types

TODO: move this to a miscellaneous section?

Java allows you to define a special class called an **enumerated type** which allow you to define a fixed list of possible values. For example, the days of the week or months of the year are possible values used in a date. However, they are more-or-less fixed (no one will be adding a new day of the week or month any time soon). An enumerated class allows us to define these values using human-readable keywords.

To create an enumerated type class we use the keywords **enum** (short for enumeration). Since an enumerated type is a class, it must follow the same rules. It must be in a **.java** source file of the same name. Inside the class we provide a comma-delimited list of keywords to define our enumeration. Consider the following example.

```
1 public enum Day {
2     SUNDAY,
3     MONDAY,
4     TUESDAY,
5     WEDNESDAY,
6     THURSDAY,
7     FRIDAY,
8     SATURDAY;
9 }
```

In the example, since the name of the enumeration is **Day** this declaration must be in a source file named **Day.java**. We can now declare variables of this type. The possible *values* it can take are restricted to **SUNDAY**, **MONDAY**, etc. and we can use these keywords in our program. However these values belong to the class **Day** and must be accessed statically. For example,

```
1 Day today = Day.MONDAY;
2
3 if(today == Day.SUNDAY || today == Day.SATURDAY) {
4     System.out.println("Its the weekend!");
5 }
```

Note the naming conventions: the name of the enumerated type follows the same upper camel casing that all classes use while the enumerated values follow an upper case underscore convention. Though our example does not contain a value with multiple words, if it had, we would have used an underscore to separate them.

Using an enumerated type has two advantages. First, it enforces that only a particular set of predefined values can be used. You would not be able to assign a value to a **Day** variable that was not already defined by the **Day** enumeration.

Second, without an enumerated type we'd be forced to use a collection of **magic numbers** to indicate values. Even for something as simple as the days of the week we'd be constantly trying to remember: which day is Wednesday again? I forget, do our weeks start with Monday or Sunday? Etc. By using an enumerated type these questions are mostly moot as we can use the more human-readable keywords and eliminate the guess

work.

28.2.1. More Tricks

Every `enum` type has some additional built-in methods that you can use. For example, there is a `values()` method that can be called on the `enum` that returns an array of the `enum`'s values. You can use an enhanced for loop to iterate over them, for example,

```
1 for(Day d : Day.values()) {
2     System.out.println(d.name());
3 }
```

In the example above, we used another feature: each `enum` value has a `name()` method that returns the value as a `String`. This example would end up printing the following.

```
SUNDAY
MONDAY
TUESDAY
WEDNESDAY
THURSDAY
FRIDAY
SATURDAY
```

Of course, we may want more human-oriented representations. To do this we could override the class's `toString()` method to return a better string representation. For example:

```
1 public String toString() {
2     if(this == SUNDAY) {
3         return "Sunday";
4     } else if(this == MONDAY) {
5         return "Monday";
6     }
7     ...
8 } else {
9     return "Saturday";
10 }
11 }
```

Because `enum` types are full classes in Java, many more tricks can be used that leverage the power of classes including using additional state and constructors. We will cover these topics later.

29. Arrays

Java allows you to declare and use arrays. Since Java is statically typed, arrays must also be typed when they are declared and may only hold that particular type of element. Since Java has automated garbage collection, memory management is greatly simplified. Finally, in Java, only locally scoped primitives and references are allocated on the program call stack. As such, there are no static arrays; all arrays are allocated in the heap space.

29.1. Basic Usage

To declare an array reference, you use syntax similar to declaring a regular variable, but you use square brackets to designate the variable as an array. Arrays for any type of variable can be created including primitives and objects.

```
1 int arr[] = null;
2 double values[] = null;
3 String names[] = null;
```

This example¹ only declares 3 references that can refer to an array, it doesn't actually create them as the references are all `null`. To create arrays of a particular size, we need to initialize them using the keyword `new`.

```
1 arr = new int[10];
2 values = new double[20];
3 names = new String[5];
```

Each of these initializations creates a new array (allocated on the heap) of the specified size (10, 20, and 5 respectively). These arrays can only hold values of the specified type (`int`, `double`, and `String` respectively).

As with regular variables, the default value for each element in these new arrays will be zero for the numeric types and `null` for object types. Alternatively, you could use a compound declaration/assignment syntax to initialize specific values:

¹You may see code examples that use the alternative notation `int[] arr = null;`. Both are acceptable. Some would argue that this way is more correct because it keeps the brackets with the type, avoiding the type-variable name-type separation in our example. Those preferring the `int arr[] = null;` notation would argue that it is “more natural” because that is how we ultimately index the array. Six of One, Half-Dozen of the Other.

29. Arrays

```
1 int arr[] = { 2, 3, 5, 7, 11 };
```

Using this syntax we do not need to specify the size of the array as the compiler is smart enough to count the number of elements we've provided. The elements themselves are denoted inside curly brackets and delimited with commas.

For both types of syntax, the actual array is always allocated on the heap while the reference variables, `arr` values, and `names` are stored in the program call stack.

Indexing

Once an array has been created, its elements can be accessed by indexing. Java uses the standard 0-indexing scheme so the first element is at index 0, the second at index 1, etc. Indexing an element involves using the square bracket notation and providing an index. Once indexed, an array element can be treated as a normal variable and can be used with other operators such as the assignment operator or comparison operators.

```
1 arr[0] = 42;
2 if(arr[4] < 0) {
3     System.out.println("negative!");
4 }
5 System.out.println("arr[1] = "+ arr[1]);
```

Recall that an index is actually an offset. The compiler and system know exactly how many bytes each element takes and so an index `i` calculates exactly how many bytes from the first element the *i*-th element is located at. Consequently it is possible to index elements that are beyond the range of the array. For example, `arr[-1]` or `arr[5]` would attempt to access an element immediately *before* the first element and immediately *after* the last element. Obviously, these elements are not part of the array.

If you attempt to access an element outside the bounds of an array, the JVM will raise an `IndexOutOfBoundsException` which is a `RuntimeException` that you can catch and handle if you choose. To prevent such an exception you can write code that does not exceed the bounds of the array. Java arrays have a special *length* property that gives you the size of the array. You can access the property using the dot operator, so `arr.length` would give the value 5.

Iteration

Using the length property you can design a for-loop that increments an index variable to iterate over the elements in an array.

```

1  int arr[] = new int[5];
2  for(i=0; i<arr.length; i++) {
3      arr[i] = 5 * i;
4  }

```

The for loop above initializes the variable `i` to zero, corresponding to the first element in the array. The continuation condition specifies that the loop continues while `i` is strictly less than the size of the array denoted using the `arr.length` property. This iteration for-loop is idiomatic when dealing with arrays.

In addition, Java (as of version 5) supports foreach loops that allow you to iterate over the elements of an array without using an index variable. Java refers to these loops as “enhanced for-loops”, but they are essentially foreach loops. For example:

```

1  for(int a : arr) {
2      System.out.println(a);
3  }

```

The syntax still uses the keyword `for`, but instead of an index variable, it specifies the type, the loop-scoped variable identifier followed by a colon and the array that you want to iterate over. Each iteration of the loop updates the variable `a` to the next value in the array.

29.2. Dynamic Memory

The use of the keyword `new` dynamically allocates memory space (on the heap) for the array. Because Java has automated garbage collection, if the reference to the array goes out of scope, it is automatically cleaned up by the `JVM`. This process is automated and essentially transparent to us. There is no reliable way to force garbage collection and in general, we shouldn't. There are sophisticated algorithms and heuristics at work that determine the “optimal” time to perform garbage collection.

```

1  int arr[];
2  //create a new array of size 10:
3  arr = new arr[10];
4  //lose the reference by explicitly setting it to null:
5  arr = null;
6  //all references to the old memory are now lost and it is
7  //eligible for garbage collection
8
9  //we can also reallocate new memory:
10 arr = new arr[20];

```

29.3. Using Arrays with Methods

We can pass and return arrays to and from methods in Java. To do so we use the same syntax as when we define them by specifying a type and using square brackets. As an example, the following method takes an array of integers and computes its sum.

```

1  /**
2   * This method computes the sum of elements in the
3   * given array which contains n elements
4   */
5  public static int computeSum(int arr[]) {
6      int sum = 0;
7      for(int i=0; i<size; i++) {
8          sum += arr[i];
9      }
10     return sum;
11 }
```

In Java, arrays are always passed by reference. Though we did not make any changes to the contents of the passed array in the particular example, in general we could have. Any such changes would be realized in the calling method. Unfortunately, there is no mechanism by which we can prevent changes to arrays when passed to methods.²

We can also create an array in a method and return it as a value. For example, the following method creates a **deep copy** of the given integer array. That is, a completely new array that is a distinct copy of the old array. In contrast, a **shallow copy** would be if we simply made one reference point to another reference.

```

1  /**
2   * This method creates a new copy of the given array
3   * and returns it.
4   */
5  public static int [] makeCopy(int a[]) {
6      int copy[] = new int[a.length];
7      for(int i=0; i<n; i++) {
8          copy[i] = a[i];
9      }
10     return copy;
11 }
```

The method returns an integer array. In fact, this method seems so useful, that it is already provided as part of the Java **Software Development Kit (SDK)**. The class **Arrays** contains dozens of utility methods that process arrays. In particular there is a **copyOf()**

²The use of the keyword **final** only prevents us from changing the array reference, not modifying the contents.

method that allows you to create deep copies of arrays and even allows you to expand or shrink their size.

29.4. Multidimensional Arrays

Java supports multidimensional arrays, though we'll only focus on 2-dimensional arrays. To declare and allocate 2-dimensional arrays, we simply use two square brackets with two specified dimensions.

```
1 int matrix[] [] = new int[10][20];
```

This creates a 2-dimensional array of integers with 10 rows and 20 columns. Once created, we can index individual elements by specifying the row and column.

```
1 for(int i=0; i<matrix.length; i++) {
2     for(int j =0; j<matrix[i].length; j++) {
3         matrix[i][j] = 10;
4     }
5 }
```

29.5. Dynamic Data Structures

The Java [SDK](#) provides a rich assortment of dynamic data structures as alternatives to arrays including lists, sets and maps. The classes that support and implement these data structures are defined in the Collections Library under the [java.util](#) package. We will cover how to use some of these data structures, but we will not go into the details of how they are implemented nor the [OOP](#) concepts that underly them.

The Java [List](#) is an *interface* that defines a dynamic list data structure. This data structure provides a dynamic collection that can grow and shrink automatically as you add and remove elements from it. It is an interface, so it doesn't actually provide an implementation, just a specification for the publicly available methods that you can use on it. To common implementations are the [ArrayList](#), which uses an array to hold elements, and [LinkedList](#) which stores elements in linked nodes.

To create an instance of either of these lists, you use the [new](#) keyword and the following syntax.

```
1 List<Integer> a = new ArrayList<Integer>();
2 List<String> b = new LinkedList<String>();
```

The first line creates a new instance of an [ArrayList](#) that is *parameterized* to hold [Integer](#) types. The second creates a new instance of a [LinkedList](#) that has been parameterized to only hold [String](#) types. Because of this parameterization, it would

29. Arrays

be a compiler error to attempt to add anything other than `Integer`s to the first list or anything other than `String`s to the second.

Once these lists have been created, you can add and remove elements as follows.

```
1 a.add(42);
2 a.add(81);
3 a.add(17);
4
5 b.add("Hello");
6 b.add("World");
7 b.add("Computers!");
```

The order that you add elements is preserved, so in the first list, the first element would be 42, the second 81, and the last 17. You can remove elements by specifying an index of the element to remove. Like arrays, lists are 0-indexed.

```
1 a.remove(0);
2
3 b.remove(2);
4 b.remove(0);
```

As you remove elements, the indices are “shifted” down, so that after removing the first element in the list `a`, 81 becomes the new first element. Removing the last then the first element in the list `b` leaves it with only one element, `"World"` as the first element (at index 0).

You can also retrieve elements from a list using 0-indexing and the `get()` method.

```
1 List<Double> values = new ArrayList<Double>();
2 values.add(3.14);
3 values.add(2.71);
4 values.add(42.0);
5
6 double x = values.get(1); //get the second value, 2.71
7 double y = values.get(2); //get the third value, 42.0
```

Any attempt to access an element that does not exist will result in an `IndexOutOfBoundsException` just as with arrays. To stay within bounds you can use the `size()` method to determine how many elements are in the collection. In this example, `values.size()` would return an integer value of 3.

Finally, most collections implement the `Iterable` interface which allows you iterate over the elements using an enhanced for-loop just as with arrays.

```
1 for(Double x : values) {
2     System.out.println(x);
3 }
```

There are dozens of other methods that allow you to insert, remove, and retrieve elements from a Java `List`; refer to the documentation for details.

Another type of collection supported by the Collections library is a `Set`. A set differs from a list in that elements are not stored in any particular order; there is no concept of the first element or last element. Moreover, a set does not allow duplicate elements.³ A commonly used implementation of the `Set` interface is the `HashSet`.

```

1 Set<String> names = new HashSet<String>();
2
3 names.add("Robin");
4 names.add("Little John");
5 names.add("Marian");
6
7 //this has no effect since Robin is already part of the set:
8 names.add("Robin");

```

Since the elements in a `Set` are unordered, we cannot use an index-based `get()` method as we did with a set. Fortunately, we can still use an enhanced for-loop to iterate over the elements.

```

1 for(String name : names) {
2     System.out.println(name);
3 }

```

When this code executes we cannot expect any particular order of the three names. Any permutation of the three may be printed. If we executed the loop more than once we may even observe a different enumeration of the names!

Finally, Java also supports a `Map` data structure which allows you to store key-value pairs. The keys and values can be any object type and are specified by two parameters when you create the map. A common implementation is the `HashMap`.

³Duplicates are determined by how the `equals()` and possibly the `hashCode()` methods are implemented in your particular objects.

29. Arrays

```
1 //define a map that maps integers (keys) to strings (values):
2 Map<Integer, String> numbers = new HashMap<Integer, String>();
3
4 //add key-value pairs:
5 numbers.add(10, "ten");
6 numbers.add(20, "twenty");
7
8 //retrieve values given a key:
9 String name = numbers.get(20); //name equals "twenty"
10
11 //invalid mappings result in null:
12 name = numbers.get(30); //name is null
```

The Collections library is much more extensive than what we've presented here. It includes stacks, queues, hash tables, balanced binary search trees, and many other dynamic data structure implementations.

30. Strings

As we've previously seen, Java has a `String` class in the standard [JDK](#). Internally, Java strings are stored as arrays of characters. However, because of the `String` class, we never directly interact with this representation, making using strings much easier than in other languages. Java strings have also supported [Unicode](#) since version 1.

Moreover, Java provides many methods as part of the `String` class that can be used to process and manipulate strings. These methods *do not* change the strings since strings in Java are [immutable](#). Instead, these methods operate by returning a *new* modified string that can then be stored in a variable.

30.1. Basics

As we've previously seen, we can declare `String` variables and assign them values using the regular assignment operator.

```
1 String firstName = "Thomas";
2 String lastName = "Waits";
3
4 //we can also reassign values
5 firstName = "Tom";
```

Note that the reassignment in the last line in the example does *not* change the original string. It just makes the variable `firstName` point to a new string. If there are no other references to the old string, it becomes eligible for garbage collection and the [JVM](#) takes care of it.

Strings can be *copied* using the `String` class's copy constructor:

```
String copy = new String(firstName);
```

However, since strings are immutable, there is rarely reason to create such a [deep copy](#).

Though you can't change individual characters in a string, you can access them using the `charAt()` method and providing an index. Characters in a string are 0-indexed just as with elements in arrays.

```

1 String fullName = "Tom Waits";
2 //access individual characters:
3 char firstInitial = fullName.charAt(0); //'T'
4 char lastInitial = fullName.charAt(4); //'W'
5
6 if(fullName.charAt(8) == 's') {
7     ...
8 }

```

30.2. String Methods

The `String` class provides dozens of convenient methods that allow you to process and modify strings. We highlight a few of the more common ones here. A full list of supported functions can be found in standard documentation.

Length

When accessing individual characters in a string, it is necessary that we know the length of the string so that we do not access invalid characters. The `length()` method returns an `int` that represents the number of characters in the string.

```

1 String s = "Hello World!";
2 char last = s.charAt(s.length()-1);
3 //last is '!'

```

Using this method we can easily iterate over each character in a string.

```

1 for(int i=0; i<fullName.length(); i++) {
2     System.out.printf("fullName[%d] = %c\n", i, fullName.charAt(i));
3 }
4
5 //or we can use toCharArray and an enhanced for-loop:
6 for(char c : fullName.toCharArray()) {
7     System.out.println(c);
8 }

```

Concatenation

Java has a concatenation operator built into the language. The familiar plus sign, `+`, can be used to combine one or more strings by appending them to each other. Concatenation results in a new string.

```

1 String firstName = "Tom";
2 String lastName = "Waits";
3
4 String formattedName = lastName + ", " + firstName;
5 //formattedName now contains "Waits, Tom"

```

Concatenation also works with numeric types and even objects.

```

1 int x = 10;
2 double y = 3.14;
3
4 String s = "Hello, x is " + x + " and y = " + y;
5 //s contains "Hello, x is 10 and y = 3.14"

```

When used with objects, the concatenation operator ends up invoking the object's `toString()` method. The plus operator as a concatenation operator is actually *syntactic sugar*. When the code is compiled, it is actually replaced with equivalent code that uses a series of the `StringBuilder` class's (a mutable version of the `String` class) `append()` method. The first example above may actually be replaced with the following code that does not use the concatenation operator.

```

1 String firstName = "Tom";
2 String lastName = "Waits";
3
4 String formattedName = new StringBuilder(lastName)
5                        .append(", ")
6                        .append(firstName)
7                        .toString();

```

You can also use the `StringBuilder` class yourself directly.

Computing a Substring

There are two methods that allow you to compute a substring of a string. The first allows you to specify a beginning index with the entire remainder of the string being included in the returned string. The second allows you to specify a beginning index as well as an ending index. In both cases, the beginning index is *inclusive* (that is the resulting string includes the character at that index), but in the second, the ending index is *exclusive* (it is not included).

```

1 String name = "Thomas Alan Waits";
2
3 String firstName = name.substring(0, 6); //"Thomas"
4 String middleName = name.substring(7, 11); //"Alan"
5 String lastName = name.substring(12); //"Waits"

```

The result of the two argument `substring()` method will always have length equal to `endIndex - beginIndex`.

30.3. Arrays of Strings

We often need to deal with collections of strings. In Java, we can define arrays of strings. Indeed, we've seen arrays of strings before. In a Java class's `main()` method, command line arguments are passed as an array of strings:

```
public static void main(String args[])
```

We can create our own arrays of strings similar to how we created arrays of `int` and `double` types.

```
1 //create an array that can hold 5 strings
2 String names[] = new String[5];
3
4 names[0] = "Margaret Hamilton";
5 names[1] = "Ada Lovelace";
6 names[2] = "Grace Hopper";
7 names[3] = "Marie Curie";
8 names[4] = "Hedy Lamarr";
```

Better yet, we can use dynamic collections such as a `List` or a `Set` of strings.

```
1 List<String> names = new ArrayList<String>();
2
3 names.add("Margaret Hamilton");
4 names.add("Ada Lovelace");
5 names.add("Grace Hopper");
6 names.add("Marie Curie");
7 names.add("Hedy Lamarr");
8
9 System.out.println(names.get(2)); //prints "Grace Hopper"
```

30.4. Comparisons

When comparing strings in Java, we cannot use the numerical comparison operators such as `==`, or `<`. Because strings are represented as arrays, using these operators actually compares the variables' *memory addresses*.

```

1 String a = new String("Hello World!");
2 String b = new String("Hello World!");
3
4 if(a == b) {
5     System.out.println("strings match!");
6 }

```

The code above will not print anything even though the strings `a` and `b` have the same content. This is because `a == b` is comparing the memory address of the two variables. Since they point to different memory addresses (created by two separate calls to the constructors) they are not equal.

Instead, there are several `comparator` methods that Java provides to compare strings. Each string has a `compareTo()` method¹ that takes another string and returns something negative, zero, or something positive depending on the relative lexicographic ordering of the strings.

```

1 int x;
2 String a = "apple";
3 String b = "zelda";
4 String c = "Hello";
5 x = a.compareTo("banana"); //x is negative
6 x = b.compareTo("mario"); //x is positive
7 x = c.compareTo("Hello"); //x is zero
8
9 //shorter strings precede longer strings:
10 x = a.compareTo("apples"); //x is negative
11
12 String d = "Apple";
13 x = d.compareTo("apple"); //x is negative

```

In the last example, `"Apple"` precedes `"apple"` since uppercase letters are ordered before lowercase letters according to the `ASCII` table. We can also make comparisons ignoring case if we need to using `compareToIgnoreCase()` method which works the same way. This is a case-insensitive version of the method. Here, `d.compareToIgnoreCase("apple")` will return zero as the two strings are the same ignoring the cases.

Note that the commonly used `equals()` method only returns `true` or `false` depending on whether or not two strings are the same or different. They cannot be used to provide a relative ordering of two strings.

¹This method is part of the `String` class due to the fact that strings implement the `Comparable` interface which defines a lexicographic ordering.

```

1 String a = "apple";
2 String b = "apple";
3 String c = "Hello";
4
5 boolean result;
6 result = a.equals(b); //true
7 result = a.equals(c); //false

```

30.5. Tokenizing

Recall that *tokenizing* is the process of splitting up a string along some *delimiter*. For example, the comma delimited string, `"Smith,Joe,12345678,1985-09-08"` contains four pieces of data delimited by a comma. Our aim is to split this string up into four separate strings so that we can process each one.

Java provides a very simple method to do this called `split()` that takes a string delimiter and returns an array of strings containing the tokens. For example,

```

1 String data = "Smith,Joe,12345678,1985-09-08";
2
3 String tokens[] = data.split(",");
4 //tokens is { "Smith", "Joe", "12345678", "1985-09-08" }
5
6 String dateTokens[] = tokens[3].split("-");
7 //dateTokens is now { "1985", "09", "08" }

```

The delimiter this method uses is actually a [regular expression](#); a sequence of characters that define a search *pattern* in which special characters can be used to define complex patterns. For example, the complex expression `^[+-]?(\d+(\.\d+)?|\.\d+)([eE][+-]?\d+)?$` will match any valid numerical value including scientific notation. We will not cover regular expressions in depth, but to demonstrate their usefulness, here's an example by which you can split a string along any and all whitespace:

```

1 String s = "Alpha Beta \t Gamma \n Delta \t\nEpsilon";
2 String tokens[] = s.split("[\\s]+");
3 //tokens is now { "Alpha", "Beta", "Gamma", "Delta", "Epsilon" }

```

31. File I/O

Java provides several different classes and utilities that support manipulating and processing files. In general, most file operations may result in an `IOException`, a checked exception that *must* be caught and handled.

31.1. File Input

Though there are several ways that you can do file input, the easiest is to use the familiar `Scanner` class. We've previously used this class to read from the standard input, `System.in`, but it can also be used to read from a file using the `File` class (in the `java.io` package). The `File` class is just a representation of a file resource and does not represent the actual file (it cannot be opened and closed).

To initialize a `Scanner` to read from a file you can use the following.

```
1 Scanner s = null;
2 try {
3     s = new Scanner(new File("/user/apps/data.txt"));
4 } catch (FileNotFoundException e) {
5     //handle the exception here
6 }
```

When initializing a `Scanner` to read from a file, the checked exception, `FileNotFoundException` must be caught and handled. Otherwise, once created, the `Scanner` class does not throw any checked exceptions.

Once created, you can use the usual methods and functionality provided by the `Scanner` class including reading the `nextInt()`, `nextDouble()`, next string using `next()` or even the entire `nextLine()`. This last one can be used in conjunction with `hasNext()` to read an entire file, line-by-line.

```
1 String line;
2 while(s.hasNext()) {
3     line = s.nextLine();
4     //process the line
5 }
```

Once we are done reading the file, we can close the `Scanner` to free up resources:

`s.close();`. We could have placed all this code within one large `try-catch` block with perhaps a `finally` block to close the `Scanner` once we were done to ensure that it would be closed regardless of any exceptions. However, Java 7 introduced a new construct, the *try-with-resources* statement.

The try-with resources statement allows us to place the initialization of a “closeable” resource (defined by the `AutoCloseable` interface) into the `try` statement. The JVM will then automatically close this resource upon the conclusion of any the `catch` block or upon the conclusion of any `catch` block. We can still provide a `finally` block if we wish, but this relieves us of the need to explicitly close the resource in a `finally` block. A full example:

```

1 File f = new File("/user/apps/data.txt");
2 //initialize a Scanner in the try statement
3 try (Scanner s = new Scanner(f)) {
4     String line;
5     while(s.hasNext()) {
6         line = s.nextLine();
7         //process the line
8     }
9 } catch (Exception e) {
10    //handle the exception here
11 }
```

Using the `Scanner` class to do file input offers a more abstract interaction with a file. It also uses a buffered input stream for performance. Binary files can still be read using `nextByte()`. However, the better solution is to use a class that models and abstracts the underlying file. For example, if you are reading or writing an image file, you should use the `java.awt.Image` class to read and write to files. The [JDK](#) and other libraries offer a wide variety of classes to model all kinds of data.

31.2. File Output

Again, there are several ways to achieve file output, but we’ll look at the two most recommended ways. First, we describe how to do convenient plaintext output using a buffered stream for performance. Unfortunately, to do this requires the nesting of several classes, the details of each we will not go into. Essentially, we create a new `FileWriter` specifying the path and file name, we then “wrap” that in a `BufferedWriter` for better performance. Finally, for convenience, we wrap that into a `PrintWriter` which offers many convenient methods for writing primitive and `String` types. It also offers a `printf()` style method for formatting.


```

1  int x = 10;
2  double pi = 3.14;
3  FileWriter fw = null;
4  try {
5      fw = new FileWriter("data.txt");
6  } catch(IOException ioe) {
7      throw new RuntimeException(ioe);
8  }
9  PrintWriter pw = new PrintWriter(new BufferedWriter(fw));
10
11 pw.println("Hello World!");
12 pw.println(x);
13 pw.printf("x = %d, pi = %f\n", x, pi);
14
15 pw.close();

```

The `close()` method will conveniently close all the underlying resource (the `BufferedWriter` and `FileWriter`) for us. In addition, it implements `AutoCloseable` and so it can be used in a try-catch-with resources statement.

Another “convenience” of `PrintWriter` is that it “swallows” exceptions (just as the `Scanner` class did). That means we don’t have to deal explicitly with the checked `IOException`s that the underlying classes throw as the `PrintWriter` silently catches them (though doesn’t handle them). However, this can also be viewed as a disadvantage in that if we want to do error handling, we need to manually check if there was an error (using `checkError()`).

The `PrintWriter` class is intended mostly for formatted output. It does not provide a way to write binary data to an output file. Just as with binary input, it is best to use a class that abstracts the file type and data so that we don’t have to deal with the low-level details of the binary data.

However, if necessary, binary output can be done using a `FileOutputStream`. Typically, you can load all your data into a byte array and dump it all at once.

```

1  byte data[] = ...;
2  try (FileOutputStream fos =
3      new FileOutputStream(new File("outfile.bin"))) {
4      fos.write(data);
5  } catch(IOException ioe) {
6      throw new RuntimeException(ioe);
7  }

```

This example uses the try-catch-with resources statement so the `FileOutputStream` will automatically be closed for us.

You *could* wrap a `FileOutputStream` in a `BufferedWriter`, but it will likely not

31. File I/O

gain you anything in terms of performance. A buffered output stream is better if your writes are frequent and “small.” Here small means smaller than the size of the buffer (`BufferedWriter` is typically 8KB). Writing several individual integer values for example would be better done by buffering them all and writing them all at once.

In our example, we simply wanted to dump a bunch of data, likely more than 8KB in practice, all at once. Moreover, using a `BufferedWriter` would lose us the ability to write raw byte data.

32. Objects

TODO

Part III.

The PHP Programming Language

33. Basics

Back in the mid-1990s the world-wide web was in its infancy but becoming more and more popular. For the most part, web pages contained static content: articles and text that was “just-there.” Web pages were far from the fully interactive and dynamic applications that they’ve become. Rasmus Lerdorf had a home page containing his resume and he wanted to track how many visitors were coming to his page. With purely static pages, this was not possible. So, in 1994 he developed PHP/FI which stood for Personal Home Page tools and Forms Interpreter. This was a series of binary tools written in C that operated through a web server’s Common Gateway Interface. When a user visited a webpage, instead of just retrieving static content, a script was invoked: it could do a number of operations and send back [HTML](#) formatted as a response. This made web pages much more dynamic: by serving it through a script, a counter could be maintained that tracked how many people had visited the site. Lerdorf eventually released his source code in 1995 and it became widely used.

Today, PHP is used in a substantial number of pages on the web and is used in many [Content Management System \(CMS\)](#) applications such as Drupal and WordPress. Because of its history, much of the syntax and aspects of PHP (now referred to as “PHP: Hypertext Preprocessor”) are influenced or inspired by C. In fact, many of the standard functions available in the language are directly from the C language.

As a scripting language, PHP is not compiled: instead, PHP code is *interpreted* by a PHP interpreter. Though there are several interpreters available, the de facto PHP interpreter is the Zend Engine, a free and open source project that is widely available on many platforms, operating systems, and web servers.

Because it was originally intended to serve web pages, PHP code can be *interleaved* with static HTML tags. This allows PHP code to be embedded in web pages and dynamically interpreted/rendered when a user requests a webpage through a web browser. Though rendering web pages is its primary purpose, PHP can be used as a general scripting language from the command line (which is how we’ll present it here).

33.1. Getting Started: Hello World

The hallmark of the introduction of programming languages is the *Hello World!* program. It consists of a simple program whose only purpose is to print out the message “Hello World!” to the user in some manner. The simplicity of the program allows the focus

to be on the basic syntax of the language. It is also typically used to ensure that your development environment, compiler, runtime environment, etc. are functioning properly with a minimal example. A basic Hello World! program in PHP can be found in Code Sample 33.1. A version in which the PHP code is interleaved in HTML is presented in Code Sample 33.2.

```

1  <?php
2
3      printf("Hello World\n");
4
5  ?>
```

Code Sample 33.1: Hello World Program in PHP

```

1  <html>
2      <head>
3          <title>Hello World PHP Page</title>
4      </head>
5      <body>
6          <h1>A Simple PHP Script</h1>
7
8          <?php printf("<p>Hello World</p>");  ?>
9
10     </body>
11 </html>
```

Code Sample 33.2: Hello World Program in PHP with HTML

We will not focus on any particular development environment, code editor, or any particular operating system, compiler, or ancillary standards in our presentation. However, as a first step, you should be able to write and run the above program on the environment you intend to use for the rest of this book. This may require that you download and install a basic PHP interpreter/development environment (such as a standard LAMP, WAMP or MAMP technology stack) or a full IDE (such as Eclipse, PhpStorm, etc.).

33.2. Basic Elements

Using the Hello World! program as a starting point, we will now examine the basic elements of the PHP language.

33.2.1. Basic Syntax Rules

PHP has adopted many aspects of the C programming language (the interpreter is written in C). However, there are some major aspects in which it differs from C. The major aspects and syntactic elements of PHP include the following.

- PHP is an interpreted language: it is not compiled. Instead it is interpreted through an interpreter that parses commands in a script file line-by-line. Any syntax errors, therefore, become runtime errors.
- PHP is *dynamically typed*: you do *not* declare variables or specify a variable's type. Instead, when you assign a variable a value, the variable's type dynamically changes to accommodate the assigned value. Variable names *always* begin with a dollar sign, `$`.
- Strings and characters are essentially the same thing (characters are strings of length 1). Strings and characters can be delimited by *either* single quotes *or* double quotes. `"this is a string"`, `'this is also a string'`, `'A'` and `"a"` are both single-character strings.
- Executable statements are terminated by a semicolon, `;`.
- Code blocks are defined by using opening and closing curly brackets, `{ ... }`. Moreover, code blocks can be *nested*: code blocks can be defined within other code blocks.
- A complete list of reserved and keywords can be found in the PHP Manual: <http://php.net/manual/en/reserved.php> and <http://php.net/manual/en/reserved.keywords.php>

PHP also supports aspects of OOP including classes and inheritance. There is also no memory management in PHP: it has automated garbage collection.

Though not a syntactic requirement, the proper use of whitespace is important for good, readable code. Code inside code blocks is indented at the same indentation. Nested code blocks are indented further. Think of a typical table of contents or the outline of a formal paper or essay. Sections and subsections or points and points all follow proper indentation with elements at the same level at the same indentation. This convention is used to organize code and make it more readable.

33.2.2. PHP Tags

PHP code can be interleaved with static HTML or text. Because of this, we need a way to indicate what should be interpreted as PHP and what should be left alone. We can do this using PHP *tags*: the opening tag is `<?php` and the closing tag is `?>`. Anything placed between these tags will be interpreted as PHP code which must adhere to the syntax rules of the language.

A file can contain multiple opening/closing PHP tags to allow you to interleave multiple sections of HTML or text. When an interpreter runs a PHP script, it will start processing the script file. Whenever it sees the opening PHP tag, it begins to execute the commands and stops executing commands when it sees the closing tag. The text outside the PHP tags is treated as raw data; the interpreter includes it as part of its output without modifying or processing it.

33.2.3. Libraries

PHP has many built-in functions that you can use. These standard libraries are loaded and available to use without any special command to import or include them. Full documentation on each of these functions is maintained in the PHP manual, available online at <http://php.net/manual/en/index.php>. The manual's web pages also contain many curated comments from PHP developers which contain further explanations, tips & tricks, suggestions, and sample code to provide further assistance.

There are many useful functions that we'll mention as we progress through each topic. One especially useful collection of functions is the math library. This library is directly adapted from C's standard math library so all the function names are the same. It provides many common mathematical functions such as the square root and natural logarithm. Table 33.1 highlights several of these functions; full documentation can be found in the PHP manual (<http://php.net/manual/en/ref.math.php>). To use these, you simply “call” them by providing input and getting the output. For example:

```
1 $x = 1.5;
2 $y = sqrt($x); //y now has the value  $\sqrt{x} = \sqrt{1.5}$ 
3 $z = sin($x); //z now has the value  $\sin(x) = \sin(1.5)$ 
```

In both of the function calls above, the value of the variable `$x` is “passed” to the math function which computes and “returns” the result which then gets assigned to another variable.

33.2.4. Comments

Comments can be written in PHP code either as a single line using two forward slashes, `//comment` or as a multiline comment using a combination of forward slash and asterisk: `/* comment */`. With a single line comment, everything on the line *after* the forward slashes is ignored. With a multiline comment, everything in between the forward slash/asterisk is ignored. Comments are ultimately ignored by the compiler so the amount of comments do not have an effect on the final executable code. Consider the following example.

Function	Description
<code>abs(\$x)</code>	Absolute value, $ x $
<code>ceil(\$x)</code>	Ceiling function, $\lceil 46.3 \rceil = 47.0$
<code>floor(\$x)</code>	Floor function, $\lfloor 46.3 \rfloor = 46.0$
<code>cos(\$x)</code>	Cosine function ^a
<code>sin(\$x)</code>	Sine function ^a
<code>tan(\$x)</code>	Tangent function ^a
<code>exp(\$x)</code>	Exponential function, e^x , $e = 2.71828\dots$
<code>log(\$x)</code>	Natural logarithm, $\ln(x)$ ^b
<code>log10(\$x)</code>	Logarithm base 10, $\log_{10}(x)$ ^b
<code>pow(\$x,\$y)</code>	The power function, computes x^y ^c
<code>sqrt(\$x)</code>	Square root function ^b

Table 33.1.: Several functions defined in the PHP math library. ^aall trigonometric functions assume input is in *radians*, **not** degrees. ^bInput is assumed to be positive, $x > 0$. ^calternatively, PHP supports exponentiation by using `x ** y`.

```

1  //this is a single line comment
2  $x = 10; //this is also a single line comment, but after some code
3
4  /*
5     This is a comment that can
6     span multiple lines to format the comment
7     message more clearly
8  */
9  $y = 3.14;

```

Most code editors and IDEs will present comments in a special color or font to distinguish them from the rest of the code (just as our example above does). Failure to close a multiline comment will likely result in a compiler error but with color-coded comments its easy to see the mistake visually.

33.2.5. Entry Point & Command Line Arguments

Every PHP script begins executing at the top of the script file and proceed in a linear, sequential manner top-to-bottom. In addition, you can provide a PHP script with inputs when you run it from the command line. These *command line arguments* are stored in two variables, `$argc` and `$argv`. The first variable, `$argc` is an integer that indicates the *number* of arguments provided *including* the name of the script file being executed. The second, `$argv` actually stores the arguments as strings. We'll be able to understand the syntax later on, but for now we can at least understand how we can access these arguments.

The variable `$argv` is an array (see Section 38) consisting of the command line arguments. To access them, you can *index* them starting at zero, the first being `$argv[0]`, the second `$argv[1]`, etc. (the last one of course would be at `$argv[$argc-1]`). The first one is always the name of the script file being run. The remaining are the command line arguments provided by the user when the script is executed. We'll see several examples later.

33.3. Variables

PHP is a dynamically typed language. As a consequence, you do not declare variables before you start using them. If you need to store a value into a variable, you simply name the variable and use an assignment operator to assign the value. Since you do not declare variables, you also do not specify a variable's type. If you assign a string to a variable, its type becomes a string. If you assign an integer to a variable, its type becomes an integer. If you reassign the value of a variable to a value with a different type, the variable's type also changes.

Internally, however, PHP does support several different types: Booleans, integers, floating-point numbers, strings, arrays, and objects.

The way that integers are represented may be platform dependent, but are usually 32-bit signed two's complement integers, able to represent integers between $-2,147,483,648$ and $2,147,483,647$.

Floating-point numbers are also platform-dependent, but are usually 64-bit double precision numbers are defined by the [IEEE 754](#) standard, providing about 16 digits of precision.

Strings and single characters are the same thing in PHP. Strings are represented as sequences of characters from the extended ASCII text table (see [Table 2.4](#)) which includes all characters in the range 0–255. PHP does not have native Unicode support for international characters.

33.3.1. Using Variables

To use a variable in PHP, you simply need to assign a value to a named variable identifier and the variable comes into scope. Variable names *always* begin with a single dollar sign, `$`. The assignment operator is a single equal sign, `=` and is a right-to-left assignment. That is, the variable that we wish to assign the value to appears on the left-hand-side while the value (literal, variable or expression) is on the right-hand-side. For example:

```
1 $numUnits = 42;
2 $costPerUnit = 32.79;
3 $firstInitial = "C";
```

Each assignment also implicitly changes the variable's type. Each of the variables above becomes an integer, floating-point number, and string respectively. Assignment statements are terminated by a semicolon like most executable statements in PHP. The identifier rules are fairly standard: a variable's name can consist of lower and uppercase alphabetic characters, numbers, and underscores. You can also use the extended ASCII character set in variable names but it is not recommended (umlauts and other diacritics can easily be confused). Variable names are *case sensitive*. As previously mentioned, variable names must *always* begin with a dollar sign, `$`. Stylistically, we adopt the modern camelCasing naming convention for variables in our code.

If you do not assign a value to a variable, that variable remains undefined or “unset”. Undefined variables are treated as `null` in PHP. The concept of “null” refers to uninitialized, undefined, empty, missing, or meaningless values. In PHP the keyword `null` is used which is case insensitive (`null`, `Null` and `NULL` are all the same), but for consistency, we'll use `null`. When `null` values are used in arithmetic expressions, `null` is treated as zero. So, `(10 + null)` is equal to 10. When `null` is used in the context of strings, it is treated as an empty string and ignored. When used in a Boolean expression or conditional, `null` is treated as `false`.

PHP also allows you to define *constants*: values that cannot be changed once set. To define a constant, you invoke a function named `define` and providing a name and value. Examples:

```
1 define("PI", 3.14159);
2 define("INSTITUTION", "University of Nebraska-Lincoln");
3 define("COST_PER_UNIT", 2.50);
```

Constant names are case sensitive. By convention, we use uppercase underscore casing. An attempt to redefine a constant value will raise a script warning, but will ultimately have no effect. When referring to constants later on in the script, you use the constant's name. You do not treat it as a string, nor do you use a dollar sign. For example:

```
$area = $r * $r * PI;
```

33.4. Operators

PHP supports the standard arithmetic operators for addition, subtraction, multiplication, and division using `+`, `-`, `*`, and `/` respectively. Each of these operators is a binary operator that acts on two operands which can either be literals or other variables and follow the usual rules of arithmetic when it comes to order of precedence (multiplication and division before addition and subtraction).

```
1 $a = 10, $b = 20, $c = 30;
2 $d = $a + 5;
3 $d = $a + $b;
4 $d = $a - $b;
5 $d = $a + $b * $c;
6 $d = $a * $b; //d becomes a floating-point number with a value .5
7
8 $x = 1.5, $y = 3.4, $z = 10.5;
9 $w = $x + 5.0;
10 $w = $x + $y;
11 $w = $x - $y;
12 $w = $x + $y * $z;
13 $w = $x * $y;
14 $w = $x / $y;
15
16 //mixing integers and floating-point numbers is no problem
17 $w = $a + $x;
```

PHP also supports the integer remainder operator using the `%` symbol. This operator gives the remainder of the result of dividing two integers. Examples:

```

1 $x = 10 % 5; //x is 0
2 $x = 10 % 3; //x is 1
3 $x = 29 % 5; //x is 4

```

33.4.1. Type Juggling

The expectations of an arithmetic expression involving two variables that are either integers or floating-point numbers are straightforward. We expect the sum/product/etc. as a result. However, since PHP is dynamically typed, a variable involved in an arithmetic expression could be anything, including a Boolean, object, array, or string. When a Boolean is involved in an arithmetic expression, `true` is treated as 1 and `false` is treated as zero. If an array is involved in an expression, it is usually a fatal error.¹ Non-null objects are treated as 1 and `null` is treated as 0.

However, when string values are involved in an arithmetic expression, PHP does something called *type juggling*. When juggled, an attempt is made to convert the string variable into a numeric value by parsing it. The parsing goes over each numeric character, converting the value to a numeric type (either an integer or floating-point number). The first type a non-numeric character is encountered, the parsing stops and the value parsed *so far* is the value used in the expression.

Consider the following examples in Code Sample 33.3. In the first block, `$a` is type juggled to the value 10. when added to `5`. In the second example, `$a` represents a floating-point number, and is converted to 3.14, the result of adding to 5 is thus 8.14. In the third example, the string does not contain any numerical values. In this case, the parsing stops at the first character and what has been parsed *so far* is zero! Finally, in the last example, the first two characters in `$a` are numeric, so the parsing ends at the third character, and what has been parsed *so far* is 10.

Relying on type juggling to convert values can be ugly and error prone. You can write much more intentional code by using the several conversion functions provided by PHP. For example:

```

1 $a = intval("10");
2 $b = floatval("3.14");
3 $c = intval("ten"); //c has the value zero

```

In all three of the examples above, the strings are converted just as they are when type juggled. However, the variables are guaranteed to have the type indicated (integer or floating-point number).

There are several utility functions that can be used to help determine the type of variable. The function `is_numeric($x)` returns `true` if `$x` is a numeric (integer or floating-point number) or represents a *pure* numeric string. The functions `is_int($x)` and

¹PHP does allow you to “add” two arrays together which results in their union.

```

1  $a = "10";
2  $b = 5 + $a;
3  print $b; //b = 15
4
5  $a = "3.14";
6  $b = 5 + $a;
7  print "b = $b"; //b = 8.14
8
9  $a = "ten";
10 $b = 5 + $a;
11 print "b = $b"; //b = 5
12
13 //partial conversions also occur:
14 $a = "10ten";
15 $b = 5 + $a;
16 print "b = $b"; //b = 15

```

Code Sample 33.3: Type Juggling in PHP

`is_float($x)` each return `true` or `false` depending on whether or not `$x` is of that type. For example:


```

1 $a = 10;
2 $b = "10";
3 $c = 3.14;
4 $d = "3.14";
5 $e = "hello";
6 $f = "10foo";
7
8 is_numeric($a); //true
9 is_numeric($b); //true
10 is_numeric($c); //true
11 is_numeric($d); //true
12 is_numeric($e); //false
13 is_numeric($f); //false
14
15 is_int($a); //true
16 is_int($b); //false
17 is_int($c); //false
18 is_int($d); //false
19 is_int($e); //false
20 is_int($f); //false
21
22 is_float($a); //false
23 is_float($b); //false
24 is_float($c); //true
25 is_float($d); //false
26 is_float($e); //false
27 is_float($f); //false

```

A more general way to determine the type of a variable is to use the function `gettype($x)` which returns a string representation of the type of the variable `$x`. The string returned by this function is one of the following depending on the type of `$x`: `"boolean"`, `"integer"`, `"double"`, `"string"`, `"array"`, `"object"`, `"resource"`, `"NULL"`, or `"unknown type"`.

Other checker functions allow you to determine if a variable has been set, if its null, “empty” etc. For example, `is_null($x)` returns `true` if `$x` is not set or is set, but has been set to `null`. The function `isset($x)` returns `true` only if `$x` is set and it is not `null`. The function `empty($x)` returns `true` if `$x` represents an empty entity: an empty string, `false`, an empty array, `null`, `"0"`, `0`, or an unset variable. Several examples are presented in Table 33.2.

Value of <code>\$var</code>	<code>isset(\$var)</code>	<code>empty(\$var)</code>	<code>is_null(\$var)</code>
42	bool(true)	bool(false)	bool(false)
<code>""</code> (an empty string)	bool(true)	bool(true)	bool(false)
<code>" "</code> (space)	bool(true)	bool(false)	bool(false)
<code>false</code>	bool(true)	bool(true)	bool(false)
<code>true</code>	bool(true)	bool(false)	bool(false)
<code>array()</code> (an empty array)	bool(true)	bool(true)	bool(false)
<code>null</code>	bool(false)	bool(true)	bool(true)
<code>"0"</code> (0 as a string)	bool(true)	bool(true)	bool(false)
0 (0 as an integer)	bool(true)	bool(true)	bool(false)
0.0 (0 as a float)	bool(true)	bool(true)	bool(false)
<code>var \$var;</code> (declared with no value)	bool(false)	bool(true)	bool(true)
<code>NULL</code> byte (<code>"\0"</code>)	bool(true)	bool(false)	bool(false)

Table 33.2.: Results for various variable values

33.4.2. String Concatenation

Strings in PHP can be concatenated (combined) in several different ways. One way you can combine strings is by using the concatenation operator which in PHP is the period. Some examples:

```

1 $s = "Hello";
2 $t = "World!";
3 $msg = $s . " " . $t; //msg contains "Hello World!"

```

Another way you can combine strings is by placing variable values directly in a string. The variables inside the string are replaced with the variable's values. Example:

```

1 $x = 13;
2 $name = "Starlin";
3 $msg = "Hello, $name, your number is $x";
4 //msg contains the string "Hello, Starlin, your number is 13"

```

33.5. Basic I/O

Recall the main purpose of PHP is as a scripting language to serve dynamic webpages. However, it does support a `CLI` and so it does support input and output from the standard input/output. There are several keywords that allow you to print output to the standard output. The keywords `print` and `echo` (which are essentially aliases of each other) allow you to print any variable or string. PHP also has the standard `printf` function to allow formatted output. Some examples:

```

1 $a = 10;
2 $b = 3.14;
3
4 print $a;
5 print "The value of a is $a\n";
6
7 echo $a;
8 echo "The value of a is $a\n";
9
10 printf("The value of a is %d, and b is %f\n", $a, $b);

```

There are also several ways to perform standard input, but the easiest is to use `fgets` (short for **f**lie **g**et **s**tring) using the keyword `STDIN` (Standard Input). This function will return, as a string, everything the user enters up to *and including* the enter key (interpreted as the newline character, `\n`). To remove the newline character, you can use another function, `trim` which removes leading and trailing whitespace from a string. A full example:

```

1 //prompt the user to enter input
2 printf("Please enter a number: ");
3 $a = fgets(STDIN);
4 $a = trim($a);

```

Alternatively, lines 3–4 could be combined into one:

```
$a = trim(fgets(STDIN));
```

The call to `fgets` *waits* (referred to as “blocking”) for the user to enter input. The user is free to start typing. When the user is done, they hit the enter key at which point the program resumes and reads the input from the standard input buffer, and returns it as a string value which we assign to the variable `$a`.

The standard input is unstructured. The user is free to type whatever they want. If we prompt the user for a number but they just start mashing the keyboard giving non-numerical input, we may get incorrect results. We can use the conversion functions mentioned above to attempt to properly convert the values. However, this only guarantees that the resulting variable is of the type we want (integer or floating-point value for example). A non numerical input may be treated as zero in the end. The standard input is not a good mechanism for reading input, but it provides a good starting point.

33.6. Examples

33.6.1. Converting Units

Let's start with a simple task: let's write a program that will prompt the user to enter a temperature in degrees Fahrenheit and convert it to degrees Celsius using the formula

$$C = (F - 32) \cdot \frac{5}{9}$$

We begin with the basic script shell with the opening and closing PHP tags and some comments documenting the purpose of our script.

```

1  <?php
2
3  /**
4   * This program converts Fahrenheit temperatures to
5   * Celsius
6   */
7
8  //TODO: implement this
9
10 ?>
```

It is common for programmers to use a comment along with a **TODO** note to themselves as a reminder of things that they still need to do with the program.

Let's first outline the basic steps that our program will go through:

1. We'll first prompt the user for input, asking them for a temperature in Fahrenheit
2. Next we'll read the user's input, likely into a floating-point number as degrees can be fractional
3. Once we have the input, we can calculate the degrees Celsius by using the formula above
4. Lastly, we will want to print the result to the user to inform them of the value

Sometimes its helpful to write an outline of such a program directly in the code using comments to provide a step-by-step process. For example:

```

1  <?php
2
3  /**
4   * This program converts Fahrenheit temperatures to
5   * Celsius
6   */
7
8  //TODO: implement this
9
10 //1. Prompt the user for input in Fahrenheit
11 //2. Read the Fahrenheit value from the standard input
12 //3. Compute the degrees Celsius
13 //4. Print the result to the user
14
15 ?>

```

As we read each step it becomes apparent that we'll need a couple of variables: one to hold the Fahrenheit (input) value and one for the Celsius (output) value. We'll want to ensure that these are floating-point numbers which we can do by making some explicit conversion.

We'll use a `printf` statement in the first step to prompt the user for input:

```
printf("Please enter degrees in Fahrenheit: ");
```

In the second step, we'll use the standard input to read the `$fahrenheit` variable value from the user. Recall that we can use `fgets` to read from the standard input, but may have to `trim` the trailing whitespace.

```
$fahrenheit = trim(fgets(STDIN));
```

If we want to ensure that the variable `$fahrenheit` is a floating-point value, we can further use `floatval()`:

```
$fahrenheit = floatval($fahrenheit);
```

We can now compute `$celsius` using the formula provided:

```
$celsius = ($fahrenheit - 32) * (5 / 9);
```

Finally, we use `printf` again to output the result to the user:

```
printf("%f Fahrenheit is %f Celsius\n", $fahrenheit, $celsius);
```

The full program can be found in Code Sample 33.4.

```

1  <?php
2
3  /**
4   * This program converts Fahrenheit temperatures to
5   * Celsius
6   */
7
8  //1. Prompt the user for input in Fahrenheit
9  printf("Please enter degrees in Fahrenheit: ");
10
11 //2. Read the Fahrenheit value from the standard input
12 $fahrenheit = trim(fgets(STDIN));
13 $fahrenheit = floatval($fahrenheit);
14
15 //3. Compute the degrees Celsius
16 $celsius = ($fahrenheit - 32) * (5/9);
17
18 //4. Print the result to the user
19 printf("%f Fahrenheit is %f Celsius\n", $fahrenheit, $celsius);
20
21 ?>

```

Code Sample 33.4: Fahrenheit-to-Celsius Conversion Program in PHP

33.6.2. Computing Quadratic Roots

Some programs require the user to enter multiple inputs. The prompt-input process can be repeated. In this example, consider asking the user for the coefficients, a, b, c to a quadratic polynomial,

$$ax^2 + bx + c$$

and computing its roots using the quadratic formula,

$$x = \frac{-b \pm \sqrt{b^2 - 4ac}}{2a}$$

As before, we can create a basic program with PHP tags and start filling in the details. In particular, we'll need to prompt for the input a , then read it in; then prompt for b , read it in and repeat for c . Thus, we have

```

1  printf("Please enter a: ");
2  $a = floatval(trim(fgets(STDIN)));
3  printf("Please enter b: ");
4  $b = floatval(trim(fgets(STDIN)));
5  printf("Please enter c: ");
6  $c = floatval(trim(fgets(STDIN)));

```

Now to compute the roots: we need to take care that we correctly adapt the formula so it accurately reflects the order of operations. We also need to use the math library's square root function (unless you want to write your own! Carefully adapting the formula leads to

```
1 $root1 = (-$b + sqrt($b*$b - 4*$a*$c) ) / (2*$a);
2 $root2 = (-$b - sqrt($b*$b - 4*$a*$c) ) / (2*$a);
```

Finally, we print the output using `printf`. The full program can be found in Code Sample 33.5.

```
1 <?php
2
3 /**
4  * This program computes the roots to a quadratic equation
5  * using the quadratic formula.
6  */
7
8 printf("Please enter a: ");
9 $a = floatval(trim(fgets(STDIN)));
10 printf("Please enter b: ");
11 $b = floatval(trim(fgets(STDIN)));
12 printf("Please enter c: ");
13 $c = floatval(trim(fgets(STDIN)));
14
15 $root1 = (-$b + sqrt($b*$b - 4*$a*$c) ) / (2*$a);
16 $root2 = (-$b - sqrt($b*$b - 4*$a*$c) ) / (2*$a);
17
18 printf("The roots of %fx^2 + %fx + %f are: \n", $a, $b, $c);
19 printf("  root1 = %f\n", $root1);
20 printf("  root2 = %f\n", $root2);
21
22 ?>
```

Code Sample 33.5: Quadratic Roots Program in PHP

This program was interactive. As an alternative, we could have read all three of the inputs as command line arguments, taking care that we need to convert them to floating-point numbers. Lines 8–13 in the program could have been changed to

```
1 $a = floatval($argv[1]);
2 $b = floatval($argv[2]);
3 $c = floatval($argv[3]);
```

Finally, think about the possible inputs a user could provide that may cause problems for this program. For example:

33. Basics

- What if the user entered zero for a ?
- What if the user entered some combination such that $b^2 < 4ac$?
- What if the user entered non-numeric values?
- For the command line argument version, what if the user provided less than three argument? Or more?

How might we prevent the consequences of such bad inputs? That is, how might we handle the even that a users enters those bad inputs and how do we communicate these errors to the user? To do so we'll need conditionals.

34. Conditionals

PHP supports the basic if, if-else, and if-else-if conditional structures as well as switch statements. Logical statements are built using the standard logical operators for numeric comparisons as well as logical operators such as negations, AND, and OR.

34.1. Logical Operators

PHP has a built-in Boolean type and supports the keywords `true` and `false`. However, *any* variable can be treated as a Boolean if used in a logical expression. Depending on the variable, it could evaluate to *true* or *false*! For example, an empty string, `""`, `null`, or a numeric value of zero, `0` are all considered *false*. A non-empty string, a non-zero numeric value, or a non-empty array all evaluate to *true*. It is best to avoid these issues by writing clean code that uses clear, explicit statements.

Because PHP is dynamically typed, comparison operators work differently depending on how they are used. First, let's consider the four basic inequality operators, `<`, `<=`, `>`, and `>=`. When used to compare numeric types to numeric types, these operators work as expected and the value of the numbers are compared and the result is either *true* or *false*. Examples:

```
1 $a = 10;
2 $b = 20;
3 $c = 20;
4
5 $r = ($a < $b); //true
6 $r = ($a <= $b); //false
7 $r = ($b <= $c); //true
8 $r = ($a > $b); //false
9 $r = ($a >= $b); //false
10 $r = ($b >= $c); //true
```

When these operators are used to compare strings to strings, the strings are compared lexicographically according to the standard ASCII text table. Some examples follow, but it is better to use a function (in particular `strcmp` which we discuss later) to do string comparisons.

```

1 $s = "aardvark";
2 $t = "zebra";
3
4 $r = ($s < $t); //true
5 $r = ($s <= $t); //true
6 $r = ($s >= $t); //false
7 $r = ($s > $t); //false

```

However, when these operators are used to compare strings to numeric types, the strings are converted to numbers using the same type juggling that happens when strings are mixed with arithmetic operators. In the following example, `$b` gets converted to a numeric type when compared to `$a` which give the results indicated in the comments.

```

1 $a = 10;
2 $b = "10";
3
4 $r = ($a <= $b); //true
5 $r = ($a < $b); //false
6 $r = ($a >= $b); //true
7 $r = ($a > $b); //false

```

With the equality operators, `==` and `!=`, something similar happens. When the types of the two operands match, the expected comparison is made: when numbers are compared to numbers their values are compared; when strings are compared to strings, their content is compared (case sensitively). However, when the types are different, again, type juggling happens and strings are converted to numbers for the purpose of comparison. Thus, a comparison like `(10 == "10")` ends up being *true*! The operators are `==` and `!=` are referred to as *loose* comparison operators because of this.

What if we want to ensure that we're comparing apples to apples? To rectify this, PHP offers another set of comparison operators, *strict* comparison operators, `===` and `!==` (the same, but with an extra equals sign, `=`). These operators will make a comparison *without* type juggling either operand first. Now a similar comparison, `(10 === "10")` ends up evaluating to *false*. The operator `===` will only evaluate to *true* if the both the operands' type *and* value are the same.

```

1 $a = 10;
2 $b = "10";
3
4 $r = ($a == $b); //true
5 $r = ($a != $b); //false
6 $r = ($a === $b); //false
7 $r = ($a !== $b); //true

```

The three basic logical operators, not `!`, AND `&&`, and OR `||` are also supported.

	Operator(s)	Associativity	Notes
Highest	<code>++</code> , <code>--</code>	left-to-right	increment operators
	<code>-</code> , <code>!</code>	right-to-left	unary negation operator, logical not
	<code>*</code> , <code>/</code> , <code>%</code>	left-to-right	
	<code>+</code> , <code>-</code>	left-to-right	addition, subtraction
	<code><</code> , <code><=</code> , <code>></code> , <code>>=</code>	left-to-right	comparison
	<code>==</code> , <code>!=</code> , <code>===</code> , <code>!==</code>	left-to-right	equality, inequality
	<code>&&</code>	left-to-right	logical AND
	<code> </code>	left-to-right	logical OR
Lowest	<code>=</code> , <code>+=</code> , <code>-=</code> , <code>*=</code> , <code>/=</code>	right-to-left	assignment and compound assignment operators

Table 34.1.: Operator Order of Precedence in PHP. Operators on the same level have equivalent order and are performed in the associative order specified.

34.1.1. Order of Precedence

At this point it is worth summarizing the order of precedence of all the operators that we've seen so far including assignment, arithmetic, comparison, and logical. Since all of these operators could be used in one statement, for example,

```
($b*$b < 4*$a*$c || $a === 0 || $argc != 4)
```

it is important to understand the order in which each one gets evaluated. Table 34.1 summarizes the order of precedence for the operators seen so far. This is not an exhaustive list of PHP operators.

34.2. If, If-Else, If-Else-If Statements

Conditional statements in PHP utilize the key words `if`, `else`, and `else if`. Conditions are placed inside parentheses immediately after the `if` and `else if` keywords. Examples of all three can be found in Code Sample 34.1.

Some observations about the syntax: the statement, `if($x < 10)` does not have a semicolon at the end. This is because it is a conditional statement that determines the flow of control and *not* an executable statement. Therefore, no semicolon is used. Suppose we made a mistake and *did* include a semicolon:

```
1 $x = 15;
2 if($x < 10); {
3     printf("x is less than 10\n");
4 }
```

This PHP code will run without error or warning. However, it will end up printing

```

1  //example of an if statement:
2  if($x < 10) {
3      printf("x is less than 10\n");
4  }
5
6  //example of an if-else statement:
7  if($x < 10) {
8      printf("x is less than 10\n");
9  } else {
10     printf("x is 10 or more \n");
11 }
12
13 //example of an if-else-if statement:
14 if($x < 10) {
15     printf("x is less than 10\n");
16 } else if($x === 10) {
17     printf("x is equal to ten\n");
18 } else {
19     printf("x is greater than 10\n");
20 }

```

Code Sample 34.1: Examples of Conditional Statements in PHP

`x is less than 10`, even though $x = 15$! Recall that a conditional statement *binds* to the executable statement or code block *immediately* following it. In this case, we've provided an *empty* executable statement ended by the semicolon. The code is essentially equivalent to

```

1  $x = 15;
2  if($x < 10) {
3  }
4  printf("x is less than 10\n");

```

Which is obviously not what we wanted. The semicolon ended up binding to the empty executable statement, and the code block containing the print statement immediately followed, but was *not* bound to the conditional statement which is why the print statement executed regardless of the value of x .

Another convention that we've used in our code is where we have placed the curly brackets. First, if a conditional statement is bound to only one statement, the curly brackets are not necessary. However, it is best practice to include them even if they are not necessary and we'll follow this convention. Second, the opening curly bracket is on the same line as the conditional statement while the closing curly bracket is indented to the same level as the start of the conditional statement. Moreover, the code inside the code block is indented. If there were more statements in the block, they would have all been at the

same indentation level.

34.3. Examples

34.3.1. Computing a Logarithm

The logarithm of x is the exponent that some *base* must be raised to get x . The most common logarithm is the natural logarithm, $\ln(x)$ which is base $e = 2.71828\dots$. But logarithms can be in any base $b > 1$ ¹. What if we wanted to compute $\log_2(x)$? Or $\log_\pi(x)$? Let's write a program that will prompt the user for a number x and a base b and computes $\log_b(x)$.

Arbitrary bases can be computed using the change of base formula:

$$\log_b(x) = \frac{\log_a(x)}{\log_a(b)}$$

If we can compute *some* base a , then we can compute any base b . Fortunately we have such a solution. Recall that the standard library provides a function to compute the natural logarithm, `log()`. This is one of the fundamentals of problems solving: if a solution already exists, use it. In this case, a solution exists for a different, but similar problem (computing the natural logarithm), but we can *adapt* the solution using the change of base formula. In particular, if we have variables `b` (base) and `x`, we can compute $\log_b(x)$ using

```
log(x) / log(b)
```

But wait: we have a problem similar to the examples in the previous section. The user could enter invalid values such as $b = -10$ or $x = -2.54$ (logarithms are undefined for non-positive values in any base). We want to ensure that $b > 1$ and $x > 0$. With conditionals, we can now do this. Once we have read in the input from the user we can make a check for good input using an `if` statement.

```
1 if($x <= 0 || $b <= 1) {
2     printf("Error: bad input!\n");
3     exit(1);
4 }
```

This code has something new: `exit(1)`. The `exit` function immediately terminates the script regardless of the rest of the code that may remain. The argument passed to `exit` is an integer that represents an *error code*. The convention is that zero indicates “no error” while non-zero values indicate some error. This is a simple way of performing *error handling*: if the user provides bad input, we inform them and quit the program,

¹Bases can also be $0 < b < 1$, but we'll restrict our attention to increasing functions only.

forcing them to run it again and provide good input. By prematurely terminating the program we avoid any illegal operation that would give a bad result.

Alternatively, we could have split the conditions into two statements and given a more descriptive error message. We use this design in the full program which can be found in Code Sample 34.2. The program also takes the input as command line arguments. Now that we have conditionals, we can actually check that the correct number of arguments was provided by the user and quit in the event that they don't provide the correct number.

```

1  <?php
2
3  /**
4   * This program computes the logarithm base b (b > 1)
5   * of a given number x > 0
6   */
7
8  if($argc != 3) {
9      printf("Usage: %s b x \n", $argv[0]);
10     exit(1);
11 }
12
13 $b = floatval($argv[1]);
14 $x = floatval($argv[2]);
15
16 if($x <= 0) {
17     printf("Error: x must be greater than zero\n");
18     exit(1);
19 }
20 if($b <= 1) {
21     printf("Error: base must be greater than one\n");
22     exit(1);
23 }
24
25 $result = log($x) / log($b);
26 printf("log_(%f)(%f) = %f\n", $b, $x, $result);
27
28 ?>

```

Code Sample 34.2: Logarithm Calculator Program in C

34.3.2. Life & Taxes

Let's adapt the conditional statements we developed in Section 3.6.4 into a full PHP script. The first thing we need to do is establish the variables we'll need and read them in from the user. At the same time we can check for bad input (negative values) for both the inputs.

```

1  //prompt for income from the user
2  printf("Please enter your Adjusted Gross Income: ");
3
4  $income = floatval(trim(fgets(STDIN)));
5
6  //prompt for children
7  printf("How many children do you have? ");
8  $numChildren = intval(trim(fgets(STDIN)));
9
10 if($income < 0 || $numChildren < 0) {
11     printf("Invalid inputs");
12     exit(1);
13 }
```

Next, we can code a series of if-else-if statements for the income range. By placing the ranges in increasing order, we only need to check the upper bounds just as in the original example.

```

1  if($income <= 18150) {
2      $baseTax = $income * .10;
3  } else if($income <= 73800) {
4      $baseTax = 1815 + ($income - 18150) * .15;
5  } else if($income <= 148850) {
6      ...
7  } else {
8      $baseTax = 127962.50 + ($income - 457600) * .396;
9  }
```

Next we compute the child tax credit, taking care that it does not exceed \$3,000. A conditional based on the number of children should suffice as at this point in the program we already know it is zero or greater.

```

1  if($numChildren <= 3) {
2      $credit = $numChildren * 1000;
3  } else {
4      $credit = 3000;
5  }
```

Finally, we need to ensure that the credit does not exceed the total tax liability (the credit is non-refundable, so if the credit is greater, the tax should only be zero, not

negative).

```

1  if($baseTax - $credit >= 0) {
2      $totalTax = $baseTax - $credit;
3  } else {
4      $totalTax = 0;
5  }

```

The full program is presented in Code Sample [34.3](#).

34.3.3. Quadratic Roots Revisited

Let's return to the quadratic roots program we previously designed that uses the quadratic equation to compute the roots of a quadratic polynomial by reading coefficients a , b , c in from the user. One of the problems we had previously identified is if the user enters “bad” input: if $a = 0$, we would end up dividing by zero; if $b^2 - 4ac < 0$ then we would have complex roots. With conditionals, we can now check for these issues and exit with an error message.

Another potential case we might want to handle differently is when there is only one distinct root ($b^2 - 4ac = 0$). In that case, the quadratic formula simplifies to $\frac{-b}{2a}$ and we can print a different, more specific message to the user. The full program can be found in Code Sample [34.4](#).


```

1  <?php
2  //prompt for income from the user
3  printf("Please enter your Adjusted Gross Income: ");
4
5  $income = floatval(trim(fgets(STDIN)));
6
7  //prompt for children
8  printf("How many children do you have? ");
9  $numChildren = intval(trim(fgets(STDIN)));
10
11 if($income < 0 || $numChildren < 0) {
12     printf("Invalid inputs");
13     exit(1);
14 }
15
16 if($income <= 18150) {
17     $baseTax = $income * .10;
18 } else if($income <= 73800) {
19     $baseTax = 1815 + ($income - 18150) * .15;
20 } else if($income <= 148850) {
21     $baseTax = 10162.50 + ($income - 73800) * .25;
22 } else if($income <= 225850) {
23     $baseTax = 28925.00 + ($income - 148850) * .28;
24 } else if($income <= 405100) {
25     $baseTax = 50765.00 + ($income - 225850) * .33;
26 } else if($income <= 457600) {
27     $baseTax = 109587.50 + ($income - 405100) * .35;
28 } else {
29     $baseTax = 127962.50 + ($income - 457600) * .396;
30 }
31
32 if($numChildren <= 3) {
33     $credit = $numChildren * 1000;
34 } else {
35     $credit = 3000;
36 }
37
38 if($baseTax - $credit >= 0) {
39     $totalTax = $baseTax - $credit;
40 } else {
41     $totalTax = 0;
42 }
43
44 printf("AGI:           %10.2f\n", $income);
45 printf("Tax:           %10.2f\n", $baseTax);
46 printf("Credit:        %10.2f\n", $credit);
47 printf("Tax Liability: %10.2f\n", $totalTax);
48
49 ?>

```

Code Sample 34.3: Tax Program in PHP

```

1  <?php
2
3  /**
4   * This program computes the roots to a quadratic equation
5   * using the quadratic formula.
6   */
7
8  if($argc != 4) {
9      printf("Usage: %s a b c\n", $argv[0]);
10     exit(1);
11 }
12
13 $a = floatval($argv[1]);
14 $b = floatval($argv[2]);
15 $c = floatval($argv[3]);
16
17 if($a === 0) {
18     printf("Error: a cannot be zero\n");
19     exit(1);
20 } else if($b*$b < 4*$a*$c) {
21     printf("Error: cannot handle complex roots\n");
22     exit(1);
23 } else if($b*$b === 4*$a*$c) {
24     $root1 = -$b / (2*$a);
25     printf("Only one distinct root: %f\n", $root1);
26 } else {
27     $root1 = (-$b + sqrt($b*$b - 4*$a*$c) ) / (2*$a);
28     $root2 = (-$b - sqrt($b*$b - 4*$a*$c) ) / (2*$a);
29
30     printf("The roots of %fx^2 + %fx + %f are: \n", $a, $b, $c);
31     printf("  root1 = %f\n", $root1);
32     printf("  root2 = %f\n", $root2);
33 }
34
35 ?>

```

Code Sample 34.4: Quadratic Roots Program in PHP With Error Checking

35. Loops

PHP supports while loops, for loops, and do-while loops using the keywords `while`, `for`, and `do` (along with another `while`). Continuation conditions for loops are enclosed in parentheses, `(...)` and the blocks of code associated with the loop are enclosed in curly brackets.

35.1. While Loops

Code Sample 35.1 contains an example of a basic while loop in PHP. Just as with conditional statements, our code styling places the opening curly bracket on the same line as the `while` keyword and continuation condition. The inner block of code is also indented and all lines in the block are indented to the same level.

```
1 $i = 1; //Initialization
2 while($i <= 10) { //continuation condition
3     //perform some action
4     $i++; //iteration
5 }
```

Code Sample 35.1: While Loop in PHP

In addition, the continuation condition does *not* contain a semicolon since it is not an executable statement. Just as with an if-statement, if we *had* placed a semicolon it would have led to unintended results. Consider the following:

```
1 while($i <= 10); {
2     //perform some action
3     $i++; //iteration
4 }
```

A similar problem occurs: the `while` keyword and continuation condition bind to the next executable statement or code block. As a consequence of the semicolon, the executable statement that gets bound to the while loop is *empty*. What happens is even worse: the program will enter an infinite loop. To see this, the code is essentially equivalent to the following:

35. Loops

```
1 while($i <= 10) {  
2 }  
3 {  
4     //perform some action  
5     $i++; //iteration  
6 }
```

In the while loop, we never increment the counter variable `$i`, the loop does nothing, and so the computation will continue on forever! Some compilers will warn you about this, others will not. It is valid PHP and will run, but obviously won't work as intended. Avoid this problem by using proper syntax.

Another common use case for a while loop is a flag-controlled loop in which we use a Boolean flag rather than an expression to determine if a loop should continue or not. Since PHP has built-in Boolean types, we can use a variable along with the keywords `true` and `false` appropriately. An example can be found in Code Sample 35.2.

```
1 $i = 1;  
2 $flag = true;  
3 while($flag) {  
4     //perform some action  
5     $i++; //iteration  
6     if($i>10) {  
7         $flag = false;  
8     }  
9 }
```

Code Sample 35.2: Flag-controlled While Loop in PHP

35.2. For Loops

For loops in PHP use the familiar syntax of placing the initialization, continuation condition, and iteration on the same line as the keyword `for`. An example can be found in Code Sample 35.3.

```
1 $i;  
2 for($i=1; $i<=10; $i++) {  
3     //perform some action  
4 }
```

Code Sample 35.3: For Loop in PHP

Again, note the syntax: semicolons are placed at the end of the initialization and

continuation condition, but *not* the iteration statement. Just as with while loops, the opening curly bracket is placed on the same line as the `for` keyword. Code within the loop body is indented, all at the same indentation level.

35.3. Do-While Loops

PHP also supports do-while loops. Recall that the difference between a while loop and a do-while loop is when the continuation condition is checked. For a while loop it is *prior* to the beginning of the loop body and in a do-while loop it is at the *end* of the loop. This means that a do-while always executes *at least once*. An example can be found in Code Sample 35.4.

```

1  $i;
2  do {
3      //perform some action
4      $i++;
5  } while($i <= 10);

```

Code Sample 35.4: Do-While Loop in PHP

Note the syntax and style: the opening curly bracket is again on the same line as the keyword `do`. The `while` keyword and continuation condition are on the same line as the closing curly bracket. In a slight departure from consistent syntax, a semicolon *does* appear at the end of the continuation condition even though it is not an executable statement.

35.4. Foreach Loops

Finally, PHP does support foreach loops using the keyword `foreach`. Some of this will be a preview of Section 38 where we discuss arrays in PHP¹, but in short you can iterate over the elements of an array as follows.

```

1  $arr = array(1.41, 2.71, 3.14);
2  foreach($arr as $x) {
3      //xnowholdsthe"current"elementinarr
4  }

```

In the `foreach` syntax we specify the array we want to iterate over, `$arr` and use the keyword `as`. The last element in the statement is the variable name that we want to use within the loop. This should be read as “`foreach` element `$x` in the array `$arr` ...”.

¹Actually, PHP supports *associative* arrays, which are not the same thing as traditional arrays.

35. Loops

Inside the loop, the variable `$x` will be automatically updated on each iteration to the next element in `$arr`.

35.5. Examples

35.5.1. Normalizing a Number

Let's revisit the example from Section 4.1.1 in which we *normalize* a number by continually dividing it by 10 until it is less than 10. The code in Code Sample 35.5 specifically refers to the value 32145.234 but would work equally well with any value of `$x`.

```
1 $x = 32145.234;
2 $k = 0;
3 while($x > 10) {
4     $x = $x / 10;
5     $k++;
6 }
```

Code Sample 35.5: Normalizing a Number with a While Loop in PHP

35.5.2. Summation

Let's revisit the example from Section 4.2.1 in which we computed the sum of integers $1 + 2 + \dots + 10$. The code is presented in Code Sample 35.6

```
1 $sum = 0;
2 for($i=1; $i<=10; $i++) {
3     $sum += $i;
4 }
```

Code Sample 35.6: Summation of Numbers using a For Loop in PHP

Of course we could easily have generalized the code somewhat. Instead of computing a sum up to a particular number, we could have written it to sum up to another variable `$n`, in which case the for loop would instead look like the following.

```
1 for($i=1; $i<=n; $i++) {
2     $sum += $i;
3 }
```

35.5.3. Nested Loops

Recall that you can write loops within loops. The inner loop will execute fully *for each* iteration of the outer loop. An example of two nested of loops in PHP can be found in Code Sample 35.7.

```

1  $n = 10;
2  $m = 20;
3  for($i=0; $i<$n; $i++) {
4      for($j=0; $j<$m; $j++) {
5          printf("(i, j) = (%d, %d)\n", $i, $j);
6      }
7  }

```

Code Sample 35.7: Nested For Loops in PHP

The inner loop execute for $j = 0, 1, 2, \dots, 19 < m = 20$ for a total of 20 times. However, it executes 20 times *for each* iteration of the outer loop. Since the outer loop execute for $i = 0, 1, 2, \dots, 9 < n = 10$, the total number of times the `printf` statement execute is $10 \times 20 = 200$. In this example, the sequence $(0, 0), (0, 1), (0, 2), \dots, (0, 19), (1, 0), \dots, (9, 19)$ will be printed.

35.5.4. Paying the Piper

Let's adapt the solution for the loan amortization schedule we developed in Section 4.7.3. First, we'll read the principle, terms, and interest as command line inputs.

Adapting the formula for the monthly payment and using the standard math library's `pow` function, we get

```

1  $monthlyPayment = ($monthlyInterestRate * $principle) /
2      (1 - pow( (1 + $monthlyInterestRate), -$n));

```

However, recall that we may have problems due to accuracy. The monthly payment could come out to be a fraction of a cent, say \$43.871. For accuracy, we need to ensure that all of the figures for currency are rounded to the nearest cent. The standard math library does have a `round` function, but it only rounds to the nearest whole number, not the nearest 100th.

However, we can *adapt* the “off-the-shelf” solution to fit our needs. If we take the number, multiply it by 100, we get (say) 4387.1 which we can now round to the nearest whole number, giving us 4387. We can then divide by 100 to get a number that has been rounded to the nearest 100th! In PHP, we could simply do the following.

```
$monthlyPayment = round($monthlyPayment * 100) / 100;
```

35. *Loops*

We can use the same trick to round the monthly interest payment and any other number expected to be whole cents. To output our numbers, we use `printf` and take care to align our columns to make it look nice. To finish our adaptation, we handle the final month separately to account for an over/under payment due to rounding. The full solution can be found in Code Sample [35.8](#).


```

1  <?php
2  if($argc != 4) {
3      printf("Usage: %s principle apr terms\n", $argv[0]);
4      exit(1);
5  }
6
7  $principle = floatval($argv[1]);
8  $apr = floatval($argv[2]);
9  $n = intval($argv[3]);
10
11  $balance = $principle;
12  $monthlyInterestRate = $apr / 12;
13
14  //monthly payment
15  $monthlyPayment = ($monthlyInterestRate * $principle) /
16      (1 - pow( (1 + $monthlyInterestRate), -$n));
17  //round to the nearest cent
18  $monthlyPayment = round($monthlyPayment * 100) / 100;
19
20  printf("Principle: %.2f\n", $principle);
21  printf("APR: %.4f%%\n", $apr * 100.0);
22  printf("Months: %d\n", $n);
23  printf("Monthly Payment: %.2f\n", $monthlyPayment);
24
25  //for the first n-1 payments in a loop:
26  for($i=1; $i<$n; $i++) {
27      // compute the monthly interest, rounded:
28      $monthlyInterest =
29          round( ($balance * $monthlyInterestRate) * 100) / 100;
30      // compute the monthly principle payment
31      $monthlyPrinciplePayment = $monthlyPayment - $monthlyInterest;
32      // update the balance
33      $balance = $balance - $monthlyPrinciplePayment;
34      // print i, monthly interest, monthly principle, new balance
35      printf("%d\t$%10.2f  $%10.2f  $%10.2f\n", $i, $monthlyInterest,
36          $monthlyPrinciplePayment, $balance);
37  }
38
39  //handle the last month and last payment separately
40  $lastInterest = round( ($balance * $monthlyInterestRate) * 100) / 100;
41  $lastPayment = $balance + $lastInterest;
42
43  printf("Last payment = %.2f\n", $lastPayment);
44  ?>

```

Code Sample 35.8: Loan Amortization Program in PHP

36. Functions

Functions are essential in PHP programming. As we've already seen, PHP provides a large library of standard functions to perform basic input/output, math, and many other functions. PHP also provides the ability to define and use your own functions.

PHP does not support function overloading, so when you define a function and give it a name, that name cannot be in conflict with any other function name in the standard library or any other code that you might use. Therefore, careful thought should go into the design of your functions.

PHP supports both call by value and call by reference. As of PHP 5.6, vararg functions are also supported (though earlier versions supported some vararg-like functions such as `printf()`). However, we will not go into detail here. Finally, another feature of PHP is that function parameters are all optional. You may invoke a function with a subset of the parameters; depending on your PHP setup, it may be issue a warning that a parameter was omitted. However, PHP allows you to define default values for optional parameters.

36.1. Defining & Using Functions

In general, you can define functions anywhere in your PHP script or codebase. They can even appear *after* code that invokes them because PHP essentially *hoists* the function definitions by doing two passes of the script. However, it is good style to include function definitions at the top of your script or in a separate PHP file for organization.

36.1.1. Declaring Functions

In PHP, to declare a function you use the keyword `function`. Because PHP is dynamically typed, a function can return *any* type. Therefore, you do not declare the return type (just as you do not declare a variable's type). After the `function` keyword you do provide an identifier and parameters as the function signature. Immediately following, you provide the function body enclosed with opening/closing curly brackets.

Typically, the documentation for functions is included with its declaration. Consider the following examples. In these examples we use a commenting style known as “doc comments.” This style was originally developed for Java but has since been adopted by many other languages.

```

1  /**
2   * Computes the sum of the two arguments.
3   */
4  function sum($a, $b) {
5      return ($a + $b);
6  }
7
8  /**
9   * Computes the Euclidean distance between the 2-D points,
10   * (x1,y1) and (x2,y2).
11   */
12 function getDistance($x1, $y1, $x2, $y2) {
13     $xDiff = ($x1-$x2);
14     $yDiff = ($y1-$y2);
15     return sqrt( $xDiff * $xDiff + $yDiff * $yDiff);
16 }
17
18 /**
19  * Computes a monthly payment for a loan with the given
20  * principle at the given APR (annual percentage rate) which
21  * is to be repaid over the given number of terms (usually
22  * months).
23  */
24 function getMonthlyPayment($principle, $apr, $terms) {
25     $rate = ($apr / 12.0);
26     $payment = ($principle * $rate) / (1-pow(1+$rate, -$terms));
27     return $payment;
28 }

```

Function identifiers (names) follow similar naming rules as variables, however they do not begin with a dollar sign. Function names must begin with an alphabetic character and may contain alphanumeric characters as well as underscores. However, using modern coding conventions we usually name functions using lower camel casing. Another quirk of PHP is that function names are *case insensitive*. Though we declared a function, `getDistance()` above, it could be invoked with either `getdistance()`, `GETDISTANCE` or any other combination of capital/lower case letters. However, good code will use consistent naming and your function calls *should* match their declaration.

The keyword `return` is used to specify the value that is returned to the calling function. Whatever value you end up returning is the return type of the function. Since you do not specify variable or return types, functions are usually referred to as returning a “mixed” type. You could design a function that, given one set of inputs, returns a number while another set of inputs ends up returning a string.

You can use the syntax `return;` to return no value (you do not use the keyword `void`).

In practice, however, the function ends up returning `null` when doing this.

36.1.2. Organizing Functions

There are many coding standards that guide how PHP code should be organized. We'll only discuss a simple mechanism here. One way to organize functions is to collect functions with similar functionality into separate PHP source files.

Suppose the functions above are in a PHP source file named `utils.php`. We could include them in another source file (our “main” source file) using an `include_once` function invocation. An example:

```

1 <?php
2
3 include_once("utils.php");
4
5 //we can now use the functions in utils.php:
6 $p = getMonthlyPayment(1000, 0.05, 12);

```

The `include_once` function essentially loads and evaluates the given PHP source file at the point in the code in which it is invoked. The “once” in the function refers to the fact that if the source file was already included in the script/code before, it will not be included a second time. This allows you to include the same source file in multiple source files without a conflict.

36.1.3. Calling Functions

The syntax for calling a function is to simply provide the function name followed by parentheses containing values or variables to pass to the function. Some examples:

```

1 $a = 10, $b = 20;
2 $c = sum($a, $b); //c contains the value 30
3
4 //invoke a function with literal values:
5 $dist = getDistance(0.0, 0.0, 10.0, 20.0);
6
7 //invoke a function with a combination:
8 $p = 1500.0;
9 $r = 0.05;
10 $monthlyPayment = getMonthlyPayment($p, $r, 60);

```

36.1.4. Passing By Reference

By default, all types (including numbers, strings, etc.) are passed by value. To be able to pass arguments by reference, we need to use slightly different syntax when defining our functions.

To specify that a parameter is to be passed by reference, we place an ampersand, `&` in front of it in the function signature.¹ No other syntax is necessary and when you call the function, PHP automatically takes care of the referencing/dereferencing for you. Consider the following examples.

```

1  <?php
2
3  function swap($a, $b) {
4      $t = $a;
5      $a = $b;
6      $b = $t;
7  }
8
9  function swapByRef(&$a, &$b) {
10     $t = $a;
11     $a = $b;
12     $b = $t;
13 }
14
15 $x = 10;
16 $y = 20;
17
18 printf("x = %d, y = %d\n", $x, $y);
19 swap($x, $y);
20 printf("x = %d, y = %d\n", $x, $y);
21 swapByRef($x, $y);
22 printf("x = %d, y = %d\n", $x, $y);
23
24 ?>
```

The first function, `swap()` passes both variables by value. Swapping the values only affects the *copies* of the parameters. The original variables `$x` and `$y` will be unaffected. In the second function, `swap2()`, both variables are passed by reference as there are ampersands in front of them. Swapping them inside the function, swaps the original variables. The output to this code is as follows.

¹Those familiar with pointers in C will note that this is the exact *opposite* of the C operator.

```
x = 10, y = 20
x = 10, y = 20
x = 20, y = 10
```

Observe that when we invoked the function, `swapByRef($x, $y);` we used the same syntax as the pass by value version. The only syntax needed to pass by reference is in the function signature itself.

36.1.5. Function Pointers

Functions are just pieces of code that reside somewhere in memory just as variables do. Since we can pass variables by reference, it also makes sense that we would do the same with functions.

In PHP, functions are first-class citizens² meaning that you can assign a function to a variable just as you would a numeric value. For example, you can do the following.

```
1 $func = swapByRef;
2
3 $func($x, $y);
```

In the example above, we assigned the function `swapByRef()` to the variable `$func` by using its identifier. The variable essentially holds a reference to the `swapByRef()` function. Since it refers to a function, we can also invoke the function using the variable as in the last line. This allows you to treat functions as callbacks to other functions. We will revisit this concept in Chapter ??.

36.2. Examples

36.2.1. Generalized Rounding

Recall that the standard math library provides a `round()` function that rounds a number to the nearest whole number. Often, we've had need to round to cents as well. We now have the ability to write a function to do this for us. Before we do, however, let's think more generally. What if we wanted to round to the nearest tenth? Or what if we wanted to round to the nearest 10s or 100s place? Let's write a general purpose rounding function that allows us to specify *which* decimal place to round.

The most natural input values would be to specify the place using an integer exponent. That is, if we wanted to round to the nearest tenth, then we would pass it `-1` as

²Some would use a much more restrictive definition of first-class and would *not* consider them first-class citizens in this sense

$0.1 = 10^{-1}$, -2 if we wanted to round to the nearest 100th, etc. On the positive end passing in 0 would correspond to the usual round function, 1 to the nearest 10s spot, and so on.

Moreover, we could demonstrate good code reuse (as well as procedural abstraction) by *scaling* the input value and reusing the functionality already provided in the math library's `round()` function. We could further define a `roundToCents()` function that used our generalized round function. Consider the following.

```

1  <?php
2
3  /**
4   * Rounds to the nearest digit specified by the place
5   * argument. In particular to the (10^place)-th digit
6   */
7  function roundToPlace($x, $place) {
8      $scale = pow(10, -$place);
9      $rounded = round(x * $scale) / $scale;
10     return $rounded;
11 }
12
13 /**
14  * Rounds to the nearest cent
15  */
16 function roundToCents($x) {
17     return roundToPlace($x, -2);
18 }
19
20 ?>
```

We could place these functions into a file named `round.php` and include them in another PHP source file.

36.2.2. Quadratic Roots

Another advantage of passing variables by reference is that we can “return” multiple values with one function call. Functions are limited in that they can only return at most one value. But if we pass multiple parameters by reference, the function can manipulate the contents of them, thereby communicating (though not strictly returning) multiple values.

Consider again the problem of computing the roots of a quadratic equation,

$$ax^2 + bx + c = 0$$

using the quadratic formula,

$$\frac{-b \pm \sqrt{b^2 - 4ac}}{2a}$$

Since there are two roots, we may have to write two functions, one for the “plus” root and one for the “minus” root both of which take the coefficients, a, b, c as arguments. However, if we wrote a single function that took the coefficients as parameters by value as well as two other parameters by reference, we could place *both* root values, one in each of the by-reference variables.

```

1  function quadraticRoots($a, $b, $c, &$root1, &$root2) {
2      $discriminant = sqrt($b*$b - 4*$a*$c);
3      $root1 = (-$b + $discriminant) / (2*$a);
4      $root2 = (-$b - $discriminant) / (2*$a);
5      return;
6  }
```

By using pass by reference variables, we avoid multiple functions. Recall that there could be several “bad” inputs to this function. The roots could be complex values, the coefficient a could be zero, etc. In the next chapter, we examine how we can *handle* these errors.

37. Error Handling & Exceptions

Modern versions of PHP support error handling through the use of exceptions. PHP has several different predefined types of exceptions and also allows you to define your own exception types by creating new classes that *inherit* from the generic `Exception` class. PHP uses the standard `try-catch-finally` control structure to handle exceptions and allows you to `throw` your own exceptions.

37.1. Throwing Exceptions

Though PHP defines several different types of exceptions, we'll only look at the generic `Exception` class. We can `throw` an exception in PHP by using the keyword `throw` and creating a new `Exception` with an error message.

```
1 throw new Exception("Something went wrong");
```

By using a generic `Exception`, we can only attach a message to the exception (which can be printed by code that catches the exception). If we want more fine-grained control over the type of exceptions, we need to define our own exceptions.

37.2. Catching Exceptions

To catch an exception in PHP you can use the standard `try-catch` control block. Optionally (and as of PHP version 5.5.0) you can use the `finally` block to clean up any resources or execute code regardless of whether or not an exception was raised. Let's take, for example, the simple task of reading input from a user and manually parsing its value into an integer. If the user enters a non-numeric value, parsing will fail and we should instead throw an exception. Consider the following function.

```

1 function readNumber() {
2     $input = readline("Please enter a number: ");
3     if( is_numeric($input) ) {
4         $value = floatval($input);
5     } else {
6         throw new Exception("Invalid input!");
7     }
8 }

```

Elsewhere in the code, we can surround a call to `readNumber()` in a `try-catch` statement.

```

1 try {
2     readNumber();
3 } catch(Exception $e) {
4     printf("Error: exception encountered: " . $e->getMessage());
5     exit(1);
6 }

```

In this example, we've simply displayed an error message to the standard error output and exited the program. That is, we've made the design decision that this error should be fatal. We could have chosen to handle this error differently in the `catch` block. The `$e->getMessage()` prints the message that the exception was created with. In this case, `"Invalid input!"`.

37.3. Creating Custom Exceptions

As of PHP 5.3.0 it is possible to define custom exceptions by *extending* the `Exception` class. To do this, you need to declare a new class. We will cover the details of classes later on. For now, we simply look at an example.

Consider the example in the previous chapter of computing the roots of a quadratic polynomial. One possible error situation is when the roots are complex numbers. We could define a new PHP class as follows.

```

1  /**
2   * Defines a ComplexRoot exception class
3   */
4  class ComplexRootException extends Exception
5  {
6      public function __construct($message = null,
7                                $code = 0,
8                                Exception $previous = null) {
9          // simply call the parent constructor
10         parent::__construct($message, $code, $previous);
11     }
12
13     // custom string representation of object
14     public function __toString() {
15         return __CLASS__ . ": [{"this->code}]: {"this->message}\n";
16     }
17 }

```

Now in our code we can catch and even throw this new type of exception.

```

1  if( $b*$b - 4*$a*$c < 0) {
2      throw new ComplexRootException("Cannot Handle complex roots");
3  }

1  try {
2      $r1 = getRoot($a, $b, $c);
3  } catch(ComplexRootException $e) {
4      //handle here
5  } catch(Exception $e) {
6      //handle all other types of exceptions here
7  }

```

In the code above we had *two* `catch` blocks. Since we can have multiple types of exceptions, we can also catch each different type and handle them differently if we choose.

Each `catch` block catches a different type of exception. The last `catch` block was written to catch a generic `Exception`. This last block will essentially catch any other type of exception. Much like an `if-else-if` statement, the first type of exception that is caught is the block that will be executed and they are all mutually exclusive. Thus, a “catch all” block like this should always be the last `catch` block. The most specific types of exceptions should be caught first and the most general types should be caught last.

38. Arrays

PHP allows you to use arrays, but PHP arrays are actually *associative arrays*. Though you can treat them as regular arrays and use contiguous integer indices, they are more flexible. You can also use strings as indices for example. In addition, since PHP is dynamically typed, PHP arrays allow mixed types. An array has no fixed type and you can place different mixed types into the same array. Moreover, PHP arrays are dynamic, so there is no memory management or allocation/deallocation of memory space. Arrays will grow and shrink automatically as you add and remove elements.

38.1. Creating Arrays

Since PHP is dynamically typed, you do not need to declare an array or specify a particular type of variable that it holds. However, there are several ways that you can initialize an array.

To create an empty array, you can call the `array()` function. Optionally, you can provide an initial list of elements to insert into the array by providing the list of elements as arguments to the function.

```
1 //create an empty array:
2 $arr = array();
3
4 //create an array with elements 10, 20, 30:
5 $arr = array(10, 20, 30);
6
7 //create an array with mixed types:
8 $arr = array(10, 3.14, "Hello");
```

38.2. Indexing

By default, when inserting elements, 0-indexing is used. In the three examples above, each element would be located at indices 0, 1, and 2 respectively. The usual square bracket syntax can be used to access and assign elements.

```

1  //create an array with elements 10, 20, 30:
2  $arr = array(10, 20, 30);
3
4  //get the first element:
5  $x = $arr[0]; //x has value 10
6
7  //change the 3rd element to 5:
8  $arr[2] = 5;
9
10 //print the 2nd element:
11 printf("$arr[1] = %d\n", $arr[1]);

```

Attempting to access an element at an invalid index does not actually result in an error or an exception (though a *warning* may be issued depending on how PHP is setup). Instead, if you attempt to access an invalid element, it will be treated as a `null` value.

```

1  $arr = array(10, 20, 30);
2  $x = $arr[10]; //x is null

```

However, an array could have `null` values in it as elements. How do we distinguish whether or not an accessed value was *actually* `null` or if it is not part of the array? PHP provides a function, `array_key_exists()` to distinguish between these two cases. It returns `true` or `false` depending on whether or not a particular index has been set or not.

```

1  $arr = array(10, null, 30);
2  if(array_key_exists(1, $arr)) {
3      print "index 1 contains an element\n";
4  }
5  if(!array_key_exists(10, $arr)) {
6      print "index 10 does not contain an element\n";
7  }
8
9  if($arr[1] === $arr[10]) {
10     print "but they are both null\n";
11 }

```

38.2.1. Strings as Indices

Since arrays in PHP are associative arrays, keys are not limited to integers. You can also use strings as keys to index elements.


```

1 $arr = array();
2 $arr[0] = 5;
3 $arr['foo'] = 10;
4 $arr['hello'] = 'world';
5
6 print "value = " . $arr["hello"];

```

Note that strings that contain integer values will be type-juggled into their numeric values. For example, `$arr["10"] = 3;` will be equivalent to `$arr[10] = 3;`. However, strings containing floating-point values will not be coerced but will remain as strings, `$arr["3.15"] = 7;` for example.

38.2.2. Non-Contiguous Indices

Another consequence of PHP arrays being associative arrays is that indices need not be contiguous. For example,

```

1 $arr = array();
2 $arr[0] = 10;
3 $arr[5] = 20;

```

The values at indices 1 through 4 are undefined and the array contains some “holes” in its indices.

38.2.3. Key-Value Initialization

Since associative arrays in PHP can be indexed by either integers or strings and need not be ordered or contiguous, we can use a special key-value initialization syntax to define not only the values, but the keys that map to those values when we initialize an array. The “double arrow”, `=>` is used to denote the mapping.

```

1 $arr = array(
2     "foo" => 5,
3     4 => "bar",
4     0 => 3.14,
5     "baz" => "ten"
6 );

```

38.3. Useful Functions

There are dozens of useful functions that PHP defines that can be used with arrays. We'll only highlight a few of the more useful ones.

38. Arrays

First, the `count()` function can be used to compute how many elements are stored in the array.

```
1 $arr = array(10, 20, 30);
2 $n = count($arr); //n is 3
```

For convenience and debugging, a special function, `print_r()` allows you to print the contents of an array in a human-readable format that resembles the key-value initialization syntax above. For example,

```
1 $arr = array(
2     "foo" => 5,
3     4 => "bar",
4     0 => 3.14,
5     "baz" => "ten"
6 );
7 print_r($arr);
```

would end up printing

```
Array
(
    [foo] => 5
    [4] => bar
    [0] => 3.14
    [baz] => ten
)
```

Two other functions, `array_keys()` and `array_values()` return new zero-indexed arrays containing the keys and the values of an array respectively. Reusing the example above,

```
1 $keys = array_keys($arr);
2 $vals = array_values($arr);
3 print_r($keys);
4 print_r($vals);
```

would print

```
Array
(
    [0] => foo
    [1] => 4
    [2] => 0
    [3] => baz
)
Array
(
    [0] => 5
    [1] => bar
    [2] => 3.14
    [3] => ten
)
```

Finally, you can use the equality operators, `==` and `===` to compare arrays. The first is

the loose equality operator and evaluates to true if the two compared arrays have the same key-value pairs while the second is the strict equality operator and is true only if the arrays have the same key/value pairs in the same order and are of the same type.

38.4. Iteration

If we have an array in PHP that we *know* is 0-indexed and all elements are contiguous, we can use a normal for-loop to iterate over its elements by incrementing an index variable.

```
1 for($i=0; $i<count($arr); $i++) {
2     print $arr[$i] . "\n";
3 }
```

This fails, however, when we have an associative array that has a mix of integer and string keys or “holes” in the indexing of integer keys. For this reason, it is more reliable to use `foreach` loops. There are several ways that we can use a `foreach` loop. The most general usage is to use the double arrow notation to iterate over each key-value pair.

```
1 //for each key value pair:
2 foreach($arr as $key => $val) {
3     print "$key maps to $val \n";
4 }
```

This syntax gives you access to both the key and the value for each element in the array `$arr`. The keyword `as` is used to denote the variable names `$key` and `$val` that will be changed on each iteration of the loop. You need not use the identifiers `$key` and `$val`; you can use any legal variable names for the key/value variables.

If you do not need the keys when iterating, you can use the following shorthand syntax.

```
1 //for each value:
2 foreach($arr as $val) {
3     print "$val \n";
4 }
```

38.5. Adding Elements

You can easily add elements to an array by simply providing an index and using the assignment operator as in the previous examples. There are also several functions that PHP defines that can insert elements to the beginning (`array_unshift()`), end (`array_push()`) or at an arbitrary position (`array_splice()`).

Another, simpler way of adding elements is to use the following syntax:

38. Arrays

```
1 $arr = array(10, 20, 30);
2 $arr[] = 5;
3 $arr[] = 15;
4 $arr[] = 25;
5 print_r($arr);
```

By using the assignment operator but not specifying the index, the element will be added to the next available integer index. Since there were already 3 elements in the array, each subsequent element is inserted at index 3, 4, and finally 5. In general, the element will be inserted at the maximum index value already used plus one. The example above results in the following.

```
Array
(
    [0] => 10
    [1] => 20
    [2] => 30
    [3] => 5
    [4] => 15
    [5] => 25
)
```

38.6. Removing Elements

You can remove elements from an array using the `unset()` function. This function only removes the element from the array, it does not shift other elements down to fill in the unused index.

```
1 $arr = array(10, 20, 30);
2 unset($arr[1]);
3 print_r($arr);
```

This example would result in the following.

```
Array
(
    [0] => 10
    [2] => 30
)
```

Further, you can use `unset()` to destroy all elements in the array:

```
unset($arr);
```

destroys the entire array. It does not merely empty the array, but it unsets the variable `$arr` itself.

38.7. Using Arrays in Functions

By default, all arguments to a function in PHP are passed by value; this includes arrays. Thus, if you make any changes to an array passed to a function, the changes are not realized in the calling function. You can explicitly specify that the array parameter is passed by reference so that any changes to the array are realized in the calling function.

To illustrate, consider the following example.

```

1 function setFirst($a) {
2     $a[0] = 5;
3 }
4
5 $arr = array(10, 20, 30);
6 print_r($arr);
7 setFirst($arr);
8 print_r($arr);

```

This example results in the following.

```

Array
(
    [0] => 10
    [1] => 20
    [2] => 30
)
Array
(
    [0] => 10
    [1] => 20
    [2] => 30
)

```

That is, the change to the first element does not affect the original array. However, if we specify that the array is passed by reference, then the change is realized. For example,

```

1 function setFirst(&$a) {
2     $a[0] = 5;
3 }
4
5 $arr = array(10, 20, 30);
6 print_r($arr);
7 setFirst($arr);
8 print_r($arr);

```

This now results in the original array being changed:

```

Array
(
    [0] => 10
    [1] => 20
    [2] => 30
)
Array
(
    [0] => 5
    [1] => 20
    [2] => 30
)

```

38.8. Multidimensional Arrays

PHP supports multidimensional arrays in the sense that elements in an array can be of any type, including other arrays.

We can use all the same syntax and operations for single dimensional arrays. For example, we can use the double arrow syntax and assign arrays as values to create a 2-dimensional array.

```

1 $mat = array(
2     0 => array(10, 20, 30),
3     1 => array(40, 50, 60),
4     2 => array(70, 80, 90)
5 );
6 print_r($mat);

```

Which results in the following:

```

Array
(
    [0] => Array
        (
            [0] => 10
            [1] => 20
            [2] => 30
        )
    [1] => Array
        (
            [0] => 40
            [1] => 50
            [2] => 60
        )
    [2] => Array
        (
            [0] => 70
            [1] => 80
            [2] => 90
        )
)

```

Alternatively, you can use two indices to get and set values from a 2-dimensional array.

```

1  for($i=0; $i<3; $i++) {
2      for($j=0; $j<4; $j++) {
3          $mat[$i][$j] = ($i+$j)*3;
4      }
5  }

```

which results in:

```

Array
(
    [0] => Array
        (
            [0] => 0
            [1] => 3
            [2] => 6
            [3] => 9
        )

    [1] => Array
        (
            [0] => 3
            [1] => 6
            [2] => 9
            [3] => 12
        )

    [2] => Array
        (
            [0] => 6
            [1] => 9
            [2] => 12
            [3] => 15
        )
)

```


39. Strings

As we've previously seen, PHP has a built-in string type. Internally, PHP strings are simply a sequence of bytes, but for our purposes we can treat it as a 0-indexed character array. PHP strings are mutable and can be changed, but it is considered best practice to treat them as mutable and rely on the many functions PHP provides to manipulate strings.

39.1. Basics

As we've previously seen, we can create strings by simply assigning a string literal value to a variable as PHP is a dynamically typed language. Strings can be specified by either single quotes or double quotes (there are no individual characters in PHP, only single character strings), but we will mostly use the double quote syntax.

```
1 $firstName = "Thomas";
2 $lastName = "Waits";
3
4 //we can also reassign values
5 $firstName = "Tom";
```

The reassignment in the last line in the example effectively destroys the old string. The assignment operator can also be used to make copies of strings

```
1 $firstName = "Thomas";
2 $alias = $firstName;
```

It is important to understand that this assignment essentially makes a [deep copy](#) of the string. Changes to the first do not affect the second one.

You can make changes to individual characters in a string by treating it like a zero-indexed array.

```
1 $a = "hello";
2 $a[0] = "H";
3 $a[5] = "!";
4 //a is now "Hello!"
```

Note that the last line extends the string by adding an additional character. You can even remove characters by setting them to the empty string.

```

1 $a = "Apples!";
2 $a[5] = "";
3 //a is now "Apple!"

```

39.2. String Functions

PHP provides dozens of convenient functions that allow you to process and modify strings. We highlight a few of the more common ones here. A full list of supported functions can be found in standard documentation. Because of history of PHP, many of the same functions defined in the C string library can also be used in PHP.

Length

When accessing individual characters in a string, it is necessary that we know the length of the string so that we do not access invalid characters (though doing so is not an error, it just results in `NULL`). The `strlen()` function returns an integer that represents the number of characters in the string.

```

1 $s = "Hello World!";
2 $x = strlen($s); //x is 12
3 $s = "";
4 $x = strlen($s); //x is 0
5
6 //careful:
7 $s = NULL
8 $x = strlen($s); //x is 0

```

As demonstrated in the last example, `strlen()` will return 0 even for `NULL` strings. Recall that we can distinguish between these two situations we can use `is_null()`. Using this function we can easily iterate over each individual character in a string.

```

1 $fullName = "Tom Waits";
2 for($i=0; $i<strlen($fullName); $i++) {
3     printf("fullName[%d] = %s\n", $i, $fullName[$i]);
4 }

```

This would print the following

```

fullName[0] = T
fullName[1] = o
fullName[2] = m
fullName[3] = 
fullName[4] = W
fullName[5] = a
fullName[6] = i
fullName[7] = t
fullName[8] = s

```

Concatenation

PHP has a concatenation operator built into the language. To concatenate one or more strings together, you can use a simple period between them as the concatenation operator. Concatenation results in a new string.

```
1 $firstName = "Tom";
2 $lastName = "Waits";
3
4 $formattedName = lastName . ", " . firstName;
5 //formattedName now contains "Waits, Tom"
```

Concatenation also works with other variable types.

```
1 $x = 10;
2 $y = 3.14;
3
4 $s = "Hello, x is " . $x . " and y = " . $y;
5 //s contains "Hello, x is 10 and y = 3.14"
```

Computing a Substring

PHP provides a simple function, `substr()` to compute a substring of a string. It takes at least 2 arguments: the string to operate on and the starting index. There is a third, optional parameter that allows you to specify the length of the resulting substring.

```
1 $name = "Thomas Alan Waits";
2
3 $firstName = substr($name, 0, 6); //"Thomas"
4 $middleName = substr($name, 7, 4); //"Alan"
5 $lastName = substr($name, 12); //"Waits"
```

As in the final example, omitting the optional length parameter results in the entire remainder of the string being returned as the substring.

39.3. Arrays of Strings

We often need to deal with collections of strings. In PHP we can define arrays of strings. Indeed, we've seen arrays of strings before. When processing command line arguments, PHP defines an array of strings, `$argv`. Each string can be accessed using an index, `$argv[0]` for example is always the name of the script.

We can create our own arrays of strings using the same syntax as with other arrays.

```

1 $names = array(
2     "Margaret Hamilton",
3     "Ada Lovelace",
4     "Grace Hopper",
5     "Marie Curie",
6     "Hedy Lamarr");

```

39.4. Comparisons

When comparing strings in PHP, we can use the usual numerical operators such as `===`, `<`, or `<=` which will compare the strings lexicographically. However, this is generally discouraged because of type juggling issues and strict vs loose equality/inequality comparisons.

Instead, there are several *comparator* methods that PHP provides to compare strings based on their content. `strcmp($a, $b)` takes two strings and returns an integer based on the lexicographic ordering of `$a` and `$b`. If `$a` precedes `$b`, `strcmp()` returns something negative. It returns zero if `$a` and `$b` have the same content. Otherwise it returns something positive if `$b` precedes `$a`.

Some examples:

```

1 $x = strcmp("apple", "banana"); //x is negative
2 $x = strcmp("zelda", "mario");  //x is positive
3 $x = strcmp("Hello", "Hello");  //x is zero
4
5 //shorter strings precede longer strings:
6 $x = strcmp("apple", "apples"); //x is negative
7
8 $x = strcmp("Apple", "apple");  //x is negative

```

In the last example, `"Apple"` precedes `"apple"` since uppercase letters are ordered before lowercase letters according to the [ASCII](#) table. We can also make comparisons ignoring case if we need to using the alternative, `strcasecmp($a, $b)`, a case-insensitive version. Here, `strcasecmp("Apple", "apple")` will return zero as the two strings are the same ignoring the cases.

The comparison functions also have length-limited versions, `strncmp($a, $b, $n)` and `strncasecmp($a, $b, $n)`. Both will only make comparisons in the first `$n` characters of the strings. Thus, `strncmp("apple", "apples", 5)` will result in zero as the two strings are equal in the first 5 characters.

39.5. Tokenizing

Recall that *tokenizing* is the process of splitting up a string along some *delimiter*. For example, the comma delimited string, `"Smith,Joe,12345678,1985-09-08"` contains four pieces of data delimited by a comma. Our aim is to split this string up into four separate strings so that we can process each one.

PHP provides several functions to to this, `explode()` and `preg_split()`.

The simpler one, `explode()` takes two arguments: the first one is a string delimiter and the second is the string to be processed. It then returns an array of strings.

```
1 $data = "Smith,Joe,12345678,1985-09-08";
2
3 $tokens = explode(",", $data);
4 //tokens is [ "Smith", "Joe", "12345678", "1985-09-08" ]
5
6 $dateTokens = explode("-", $tokens[3]);
7 //dateTokens is now [ "1985", "09", "08" ]
```

The more sophisticated one, `preg_split()` also takes two arguments¹, but instead of a simple delimiter, it actually uses a *regular expression*; a sequence of characters that define a search *pattern* in which special characters can be used to define complex patterns. For example, the complex expression `^[+-]?(\d+(\.\d+)?|\.\d+)([eE][+-]?(\d+)?$` will match any valid numerical value including scientific notation. We will not cover regular expressions in depth, but to demonstrate their usefulness, here's an example by which you can split a string along any and all whitespace:

```
1 $s = "Alpha Beta \t Gamma \n Delta \t\nEpsilon";
2 $tokens = preg_split("/[\\s]+/", $s);
3 //tokens is now [ "Alpha", "Beta", "Gamma", "Delta", "Epsilon" ]
```

¹The “preg” stands for **P**erl **C**ompatible **R**egular **E**xpression.

40. File I/O

TODO: filegetcontents, URL opening

Because of the history of PHP, file functions, just like string functions, were mostly influenced by the C standard library functions and have very similar naming and usage. Writing binary or plaintext data is determined by which functions you use.

In general whether or not a file input/output stream is buffered or unbuffered is determined by the system configuration. There are some ways in which this can be changed, but we will not cover them in detail.

40.1. Opening Files

Files are represented in PHP as a “resource” that can be passed around to other functions to read and write to the file. For our purposes, a resource is simply a variable that can be stored and passed to other functions.

To open a file, you use the `fopen()` function (short for **file open**) which requires two arguments and returns a file resource. The first argument is the file path/name that you want to open for processing. The second argument is a string representing the “mode” that you want to open the file in. There are several supported modes, but the two we will be interested in are reading, in which case you pass it `"r"` and writing in which case you pass it `"w"`. The path can be an absolute path, relative path, or may be omitted if the file is in the current working directory.

```

1  //open a file for reading (input):
2  $input = fopen("/user/apps/data.txt", "r");
3  //open a file for reading (output):
4  $output = fopen("./results.txt", "w");
5
6  if(!$input) {
7      printf("Unable to open input file\n");
8      exit(1);
9  }
10
11 if(!$output) {
12     printf("Unable to open output file\n");
13     exit(1);
14 }

```

The two checks above check that the file opened successfully. If opening the file failed, `fopen()` returns `false` (and the interpreter issues warning).

40.2. Reading & Writing

When a file is opened, the file resource returned by `fopen()` initially points to the beginning of the file. As you read or write from it, the resource advances through the file content.

Reading

There are a couple of ways to read input from a file. To read a file line by line, we could use `fgets()` to get each line. It takes a single argument: the file “handle” that was returned by `fopen()` and returns a string representing the entire line *including* the newline character. If necessary, leading and trailing whitespace can be removed using `trim()`. To determine the end of a file you can use `feof()` which returns true when the resource has reached the end of the file. Here is an example processing an entire file line-by-line:


```

1 $h = fopen("input.data", "r");
2 while(!feof($h)) {
3     //read the next line:
4     $line = fgets($h);
5     //trim it:
6     $line = trim($line);
7     //process it, we'll just print it
8     print $line;
9 }

```

Alternatively there is a convenient function, `file_get_contents()` that will retrieve the entire file as a string.

```
$fileContents = file_get_contents("./inputFile.txt");
```

Writing

There are several ways that we can output to files, but the easiest is to simply use `fwrite()` (short for **file write**). This is a “binary-safe” file output function that takes two arguments: the file “handle” to write to and a string of data to be written. It also returns an integer representing the number of bytes written to the file (or `FALSE` on error).

```

1 $x = 10;
2 $y = 3.14;
3
4 //write to a plaintext file
5 fwrite($output, "Hello World!\n");
6 fwrite($output, "x = $x, y = $y\n");

```

40.2.1. Using URLs

A nice feature of PHP is that you can use URLs as file names to read and write to a URL. “Reading” from a URL would simply mean connecting to a remote resource, such as a webservice and downloading its contents (which may be [HTML](#), [XML](#) or [JSON](#) data). Writing to a URL may be used to *post* data to a web page in order to receive a response.

As an example, we can download a webpage in PHP as follows.

```
1 $h = fopen("http://cse.unl.edu", "r");
2 $contents = "";
3 while(!feof($h)) {
4     $contents .= fgets($h);
5 }
6
7 //or just:
8 $contents = file_get_contents("http://cse.unl.edu");
```

40.2.2. Closing Files

Once you are done processing a file, you should close it using the `fclose()` function.

```
fclose($h);
```

which takes a single argument, the file handle that you wish to close.

41. Objects

TODO

Glossary

abstraction a technique for managing complexity whereby levels of complexity are established so that higher levels do not see or have to worry about details at lower levels.

algorithm a process or method that consists of a specified step-by-step set of operations. [15](#)

anonymous function a function that has no identifier or name, typically created so that it can be passed as an argument to another function as a callback. [132](#)

anti-pattern a common software pattern that is used as a solution to recurring problems that is usually ineffective in solving the problem or introduces risks and other problems; a technical term for common “bad-habits” that can be found in software. [138](#)

array an ordered collection of pieces of data, usually of the same type.

assignment operator an operator that allows a user to assign a value to a variable. [31](#)

backward compatible a program, code, library, or standard that is compatible with previous versions so that current and older versions of it can coexist and successfully operate without breaking anything. [27](#)

bit the basic unit of information in a digital computer. A bit can be either 1 or 0 (alternatively, *true/false*, on/off, high voltage/low voltage, etc.). Originally a portmanteau (mash up) of **binary digit**. [4](#), [20](#)

Boolean a data type that represents the truth value of a logical statement. Booleans typically have only two values: *true* or *false*. [27](#)

bug A flaw or mistake in a computer program that results in incorrect behavior that may have unintended such as errors or failure. The term predates modern computer systems but was popularized by Grace Hopper who, when working with the Mark II computer in 1946 traced a system failure to a moth stuck in a relay. [43](#), [74](#), [137](#)

byte a unit of information in a digital computer consisting of 8 bits. [4](#)

call by reference when a variable’s memory address is passed as a parameter to a function, enabling the function to manipulate the contents of the memory address and change the original variable’s value. [128](#)

- call by value** when a *copy* of a variable's value is passed as a parameter to a function; the function has no reference to the original variable and thus changes to the copy inside the function have no effect on the original variable. [126](#)
- callback** a function or executable unit of code that is passed as an argument to another function with the intention that the function that it is passed to will execute or “call back” the passed function at some point. [130](#)
- case sensitive** a language is case sensitive if it recognizes differences between lower and upper case characters in identifier names. A language is case insensitive if it does not. [17](#)
- chomp** the operation of removing any endline characters from a string (especially when read from a file); may also refer more generally to removing leading and trailing whitespace from a string or “trimming” it. [273](#),
- code smell** a symptom or common pattern in source code that is usually indicative of a deeper problem or design flaw; smells are usually not bugs and may not cause problems in and of themselves, but instead indicate a pattern of carelessness or low quality of software design or implementation. [138](#)
- comparator** a function or object that allows you to pass in two elements a, b for comparison and returns an integer indicating their relative order: something negative, zero, or something positive if $a < b$, $a = b$ or $a > b$ respectively. [166](#), [266](#), [345](#), [412](#)
- compile** the process of translating code in a high-level programming language to a low level language such as assembly or machine code.
- computer engineering** a discipline integrating electrical engineering and computer science that tends to focus on the development of hardware and its interaction with software.
- computer science** the mathematical modeling and scientific study of computation.
- concatenation** the process of combining two (or more) strings to create a new string by appending one of them to the end of the other. [166](#)
- constant** a variable whose value cannot be changed once set.
- contradiction** a logical statement that is always *false* regardless of the truth values of the statement's variables. [64](#)
- control flow** the order in which individual statements in a program are executed or evaluated. [67](#)
- cruft** anything that is left over, redundant or getting in the way; in the context of code cruft is code that is no longer needed, legacy or simply poorly written source code.
- dangling pointer** when a reference to dynamically allocated memory is lost and the memory can no longer be deallocated, resulting in a memory leak. Alternatively,

when a reference points to memory that gets deallocated or reallocated but the pointer remains unmodified, still referencing the deallocated memory. [152](#)

dead code a code segment that has no effect on a program either because it is unused or unreachable (the conditions involving the code will never be satisfied). [64](#)

debug the process of analyzing a program to find a fault or error with the code that leads to bad or unexpected results. [138](#)

debugger a software tool that facilitates debugging; usually a debugger simulates the execution of a program allowing a developer to view the contents of a program as it executes and to “walk” through the execution step by step. [138](#)

deep copy in contrast to a shallow copy, a deep copy is a copy of an array or other piece of data that is distinct from the original. Changes to one copy do not affect the other. [154](#), [258](#), [336](#), [341](#), [409](#)

defensive programming an approach to programming in which error conditions are checked and handled, preventing undefined or erroneous operations from happening in a program. [36](#), [45](#), [76](#)

dynamic typing a variable whose type can change during runtime based on the value it is assigned. [28](#),

encapsulation the grouping and protection of data together into one logical entity along with the functionality (functions or methods) that act on that data. [28](#)

enumerated type a data type (usually user defined) that consists of a list of named values. [249](#), [329](#)

exception an event or occurrence of an erroneous or “exceptional” condition that interrupts the normal flow of control in a program, handing control over to exception handler(s). [141](#)

expression a combination of values, constants, literals, variables, operators and possibly function calls such that when evaluated, produce a resulting value. [31](#)

file a resource on a computer stored in memory that holds data. [171](#)

flowcharts a diagram that represents an algorithm or process, showing steps as boxes connected by arrows which establish an order or flow. [15](#)

function a sequence of program instructions that perform a specific task, packaged as a unit, also known as a *subroutine*. [121](#)

function overloading the ability to define multiple functions with the same name but with with a different number of or different types of parameters. [132](#)

garbage collection automated memory management in which a garbage collector attempts to reclaim memory (garbage) that is no longer being used by a program so

that it can be reallocated for other purposes. [154](#), [279](#)

global scope a variable, function, or other element in a program has global scope if it is visible or has effect throughout the entire program. [30](#),

hardware (computer hardware) the physical components that make up a computer system such as the processor, motherboard, storage devices, input and output devices, etc..

hexadecimal base-16 number system using the symbols 0, 1, . . . , 9, A, B, C, D, E, F; usually denoted with a prefix `0x` such as `0xff1321ab01`.

hoisting usually used in interpreted languages, hoisting involves processing code to find variable or function declarations and processing them before actually executing the code or script. [122](#)

identifier a symbol, token, or label that is used to refer to a variable. Essentially, a variable's name. [16](#)

idiom in the context of programming, an idiom is a commonly used pattern, expression or way of structuring code that is well-understood for users of the language. For example, a for-loop structure that iterates over elements in an array. May also refer to a programming design pattern.. [255](#),

immutable an object whose internal state cannot be changed once created, alternatively, one whose internal state cannot be *observably* changed once created. [285](#), [317](#), [341](#)

inheritance an object oriented programming principle that allows you to derive an object from another object, usually to allow for more specificity.

input data or information that is provided to a computer program for processing. [38](#)

interactive a program that is designed to interface with humans by prompting them for input and displaying output directly to them. [39](#)

interactive an informal, abstract, high-level description of a process or algorithm. [39](#)

keyword a word in a programming language with a special meaning in a particular context. In contrast to a reserved word, a keyword *may* be used for an identifier (variable or function name) but it is strongly discouraged to do so as the keyword already has an intended meaning.

kilobyte a unit of information in a digital computer consisting of 1024 bytes (equivalently, 2^{10} bytes), KB for short.

lexicographic a generalization of the usual dictionary order as codified with the ASCII character table. [166](#)

linking the process of generating an executable file from (multiple) object files.

- lint** (or linter) a static code analysis tool that analyzes code for suspicious or error-prone code that is likely to cause problems. [138](#)
- literal** in a programming language, a literal is notation for specifying a value such as a number or string that can be directly assigned to a variable. [27](#), [31](#)
- magic number** a value used in a program with unexplained, undocumented, or ambiguous meaning, usually making the code less understandable. [249](#), [250](#), [330](#)
- mantissa** the part of a floating-point number consisting of its significant digits (called a significand in scientific notation). [23](#)
- map** a data structure that allows you to store elements as key-value pairs with the key mapping to a value.
- memory leak** the gradual loss of memory when a program fails to deallocate or free up unused memory, degrading performance and possibly resulting in the termination of the program when memory runs out. [152](#), [259](#), [262](#)
- naming convention** a set of guidelines for choosing identifier names for variables, functions, etc. in a programming language. Conventions may be generally accepted by all developers of a particular language or they may be established for use in a particular library, framework, or organization. [17](#)
- network** a collection of two or more computer systems linked together through a physical connection over which data can be transmitted using some protocol.
- octal** base-8 number system using the symbols 0, 1, 2, . . . , 6, 7; usually denoted with a single leading zero such as `0123742`.
- operand** the arguments that an operator applies to. [30](#)
- operator** a symbol used to denote some transformation that combines or changes the operands it is applied to to produce a new value. [30](#)
- order of precedence** the order in which operators are evaluated, multiplication is performed before addition for example. [35](#)
- output** data or information that is produced as the result of the execution of a program. [39](#)
- overflow** when an arithmetic operation results in a number that is larger than the specified type can represent overflow occurs resulting in an invalid result. [36](#)
- parse** to process data to identify its individual components or elements. [167](#),
- persistence** the characteristic of data that outlives the process or program that created it; the saving of data across multiple runs of a program. [171](#)

pointer a reference to a particular memory location in a computer. [28](#), [237](#)

polymorphism an object oriented programming concept that allows you to treat a variable, method, or object as different types.

primitive a basic data type that is defined and provided by a programming language. Typically numeric and character types are primitive types in a language for example. Generally, the user doesn't need to define the operations involving primitive types as they are defined by the language. Primitive data types are used as the basic building blocks in a program and used to *compose* more complex user-defined types. [28](#), [285](#)

procedural abstraction the concept that a procedure or sequence of operations can be encapsulated into one logical unit (function, subroutine, etc.) so that a user need not concern themselves with the low-level details of how it operates. [122](#)

program stack also referred to as a *call stack*, it is an area of memory where stack frames are stored for each function call containing memory for arguments, local variables and return values/addresses. [125](#)

protocol a set of rules or procedures that define how communication takes place.

pseudocode the act of a program asking a user to enter input and subsequently waiting for the user to enter data. [12](#)

queue a data structure that store elements in a FIFO (First-In First-Out) manner; elements can be added to the end of a queue by an *enqueue* operation and removed from the start of a queue by a *dequeue* operation.

radix the base of a number system. Binary, octal, decimal, hexadecimal would be base 2, 8, 10, and 16 respectively.

reentrant a function that can be interrupted during its execution while another thread can successfully invoke the function without the two functions interfering with the data used in either function call. [269](#)

refactor the process of modifying, updating or restructuring code without changing its external behavior; refactoring may be done to make code more efficient, more readable, more reliable, or simply to bring it into compliance with style or coding conventions.

reference a reference in a computer program is a variable that refers to an object or function in memory. [28](#)

regular expression a sequence of characters in which special characters and directives can be used to define a complex pattern that can be searched and matched in another string or data. [346](#), [413](#)

reserved word a word or identifier in a language that has a special meaning to the

syntax of the language and therefore cannot be used as an identifier in variables, functions, etc.. [17](#)

scope the *scope* of a variable, method, or other entity in a program is the part of the program in which the name or reference of the entity is bound. That is, the part of the program that “knows” about the variable in which the variable can be accessed, changed, or used. [29](#), [199](#), [281](#)

scope a function signature is how a function is uniquely identified. A signature includes the name (identifier) of the function, its parameter list (and maybe types) and the return type. [122](#)

segmentation fault a fault or error that arises when a program attempts to access a segment of memory that it is not allowed access to, usually resulting in the program being terminated by the operating system. [237](#), [254](#)

shallow copy in contrast to a deep copy, a shallow copy is merely a reference that refers to the original array or piece of data. The two references point to the same data, so if the data is modified, both references will realize it.. [154](#), [258](#), [336](#)

short circuiting the process by which the second operand in a logical statement is not evaluated if the value of the expression is determined by the first operand. [66](#)

software any set of machine-readable instructions that can be executed in a computer processor.

software engineering the study and application of engineering principles to the design, development, and maintenance of complex software systems.

spaghetti code a negative term used for code that is overly complex, disorganized or unstructured code.

stack a data structure that stores elements in a LIFO (last-in first-out) manner; elements can be added to a stack via a *push* operation which places the element on the “top” of the stack; elements can be removed from the top of the stack via a *pop* operation. [125](#)

static analysis the analysis of software that is performed on source (or object) code without actually running or compiling a program usually by using an automated tool that can detect actual or potential problems with the source code (other than syntactic problems that could easily be found by a compiler). [138](#)

static dispatch when function overloading is supported in a language, this is the mechanism by which the compiler determines *which* function should be called based on the number and type of arguments passed to the function when it is called. [132](#)

static typing a variable whose type is specified when it is created (declared) and does not change while the variable remains in scope. [28](#),

string a data type that consists of a sequence of characters which are encoded under

some encoding standard such as ASCII or Unicode. [24](#), [165](#)

string concatenation an operation by which a string and another data type are combined to form a new string. [35](#)

syntactic sugar syntax in a language or program that is not absolutely necessary (that is, the same thing can be achieved using other syntax), but may be shorter, more convenient, or easier to read/write. In general, such syntax makes the language “sweeter” for the humans reading and writing it. [37](#), [75](#), [94](#), [147](#), [343](#)

tautology a logical statement that is always *true* regardless of the truth values of the statement’s variables. [64](#)

token when something (usually a string) is parsed, the individual components or elements are referred to as tokens. [167](#)

top-down design an approach to problem solving where a problem is broken down into smaller parts. [3](#), [121](#)

transpile to (automatically) translate code in one programming language into code in another programming language, usually between two high-level programming languages.

truncation removing the fractional part of a floating-point number to make it an integer. Truncation is *not* a rounding operation. [33](#), [205](#), [288](#)

two’s complement A way of representing signed (positive and negative) integers using the first bit as a sign bit (0 for positive, 1 for negative) and where negative numbers are represented as the complement with respect to 2^n (the result of subtracting the number from 2^n) . [22](#)

type a variable’s type is the classification of the data it represents which could be numeric, string, boolean, or a user defined type. [20](#)

type casting converting or variable’s type into another type, for example, converting an integer into a more general floating-point number, or converting a floating-point number into an integer, truncating and losing the fractional part. [34](#), [205](#), [288](#)

underflow when an arithmetic operation involving floating-point numbers results in a number that is smaller than the smallest representable number underflow occurs resulting in an invalid result. [36](#)

Unicode an international character encoding standard used in programming languages and data formats. [341](#)

validation the process of verifying that data is correct or conforms to certain expectations including formatting, type, range of values, represents a valid value, etc.. [39](#)

variable a memory location which stores a value that may be set using an assignment operator. Typically a variable is referred to using a name or *identifier*. [16](#)

widget a generic term for a graphical user interface component such as a button or text box.

Acronyms

ACM Association for Computing Machinery.

ALU Arithmetic and Logic Unit. [4](#)

ANSI American National Standards Institute. [197](#)

API Application Programmer Interface. [14](#), [171](#), [329](#)

ASCII American Standard Code for Information Interchange. [25](#), [58](#), [171](#), [174](#), [202](#), [261](#), [267](#), [281](#), [286](#), [345](#), [412](#)

CE Computer Engineering.

CLA Command Line Arguments.

CLI Command Line Interface. [42](#), [363](#)

CMS Content Management System. [353](#)

CMYK Cyan-Magenta-Yellow-Key.

CPU Central Processing Unit. [4](#), [66](#)

CS Computer Science.

CSS Cascading Style Sheets.

CSV Comma Separated Values. [167](#), [273](#)

CWD Current Working Directory. [172](#)

CYA Cover Your Ass.

DRY Don't Repeat Yourself. [233](#)

EB Exabyte.

ECMA European Computer Manufacturers Association.

EDI Electronic Data Interchange.

EOF End Of File. [172](#)

FIFO First-In First-Out.

FOSS Free and Open Source Software.

GB Gigabyte.

GCC GNU Compiler Collection.

GDB GNU Debugger.

GIF Graphics Interchange Format.

GIMP GNU Image Manipulation Program.

GIS Geographic Information System.

GNU GNU's Not Unix!. [46](#), [259](#)

GUI Graphical User Interface. [39](#), [132](#)

HTML HyperText Markup Language. [169](#), [172](#), [353](#), [417](#)

IDE Integrated Development Environment. [5](#), [19](#), [43](#), [46](#), [201](#), [280](#), [284](#), [357](#)

IEC International Electrotechnical Commission. [23](#), [197](#)

IEEE Institute of Electrical and Electronics Engineers. [23](#), [24](#), [203](#), [248](#), [358](#)

ISO International Organization for Standardization. [197](#)

JDBC Java Database Connectivity.

JDK Java Development Kit. [279](#), [280](#), [321](#), [325](#), [329](#), [341](#), [348](#)

JEE Java Enterprise Edition.

JIT Just In Time. [9](#)

JPEG Joint Photographic Experts Group. [171](#)

JRE Java Runtime Environment.

JSON JavaScript Object Notation. [173](#), [417](#)

JVM Java Virtual Machine. [7](#), [9](#), [279](#), [280](#), [317](#), [325](#), [329](#), [334](#), [335](#), [341](#)

KB Kilobyte. [148](#), [350](#)

LIFO Last-In First-Out. [125](#)

MB Megabyte. [148](#)

MP3 MPEG-2 Audio Layer III.

MPEG Moving Picture Experts Group.

NIST National Institute of Standards and Technology.

ODBC Open Database Connectivity.

OEM Original Equipment Manufacturer.

OOP Object-Oriented Programming. [280](#), [282](#), [327](#), [337](#), [355](#)

PB Petabyte.

PHP PHP: Hypertext Preprocessor (a recursive backronym; used to stand for Personal Home Page).

PNG Portable Network Graphics.

POJO Plain Old Java Object.

POSIX Portable Operating System Interface. [202](#), [248](#), [272](#)

RAM Random Access Memory. [5](#)

REPL Read-Eval-Print Loop.

RGB Red-Green-Blue.

ROM Read-Only Memory.

SDK Software Development Kit. [336](#), [337](#)

SE Software Engineering.

SEO Search Engine Optimization.

SQL Structured Query Language. [325](#), [329](#)

SSL Secure Sockets Layer. [237](#)

STEAM Science, Technology, Engineering, Art, and Math.

STEM Science, Technology, Engineering, and Math.

TB Terabyte.

TDD Test-Driven Development.

TSV Tab Separated Values. [167](#)

UI User Interface.

URL Uniform Resource Locator.

Acronyms

UTF-8 Universal (Character Set) Transformation Format–8-bit.

UX User Experience.

VLSI Very Large Scale Integration. [4](#)

W3C World Wide Web Consortium.

WWW World Wide Web. [169](#), [279](#)

XML Extensible Markup Language. [18](#), [173](#), [417](#)

Index

- arrays, [145](#)
- case sensitive, [17](#)
- conditionals, [57](#)
 - if statement, [67](#)
 - if-else statement, [69](#)
 - if-else-if statement, [71](#)
- conjunction, *see* logical operators–and
- disjunction, *see* logical operators–or
- do-while loop, [92](#)
- error handling, [137](#)
 - exception, [141](#)
- exception, [141](#)
- file I/O, [171](#)
- for loop, [91](#)
- foreach loop, [94](#), [147](#)
- functions, [121](#)
- if statement, [67](#)
- if-else statement, [69](#)
- if-else-if statement, [71](#)
- infinite loop, [89](#), [95](#)
- Integrated Development Environment, [5](#)
- logical operators, [57](#)
 - and, [61](#)
 - negation, [60](#)
 - or, [62](#)
- loops, [87](#)
 - do-while loop, [92](#)
 - for loop, [91](#)
 - foreach loop, [94](#)
 - infinite loop, [95](#)
 - while loop, [89](#)
- memory leak, [152](#)
- objects, [183](#)
- operator, [30](#)
 - logical, [57](#)
- order of precedence, [35](#)
 - logic, [65](#)
- short circuiting, [66](#)
- strings, [24](#), [165](#)
- type juggling, [354](#)
- variable, [16](#)
 - scope, [29](#)
- while loop, [89](#)

Bibliography

- [1] Mars climate orbiter. <http://mars.jpl.nasa.gov/msp98/orbiter/>, 1999. [Online; accessed 17-March-2015].
- [2] Moth in the machine: Debugging the origins of ‘bug’. Computer World Magazine, September 2011.
- [3] errno.h: system error numbers - base definitions reference. <http://pubs.opengroup.org/onlinepubs/9699919799/basedefs/errno.h.html>, 2013. [Online; accessed 13-September-2015].
- [4] ISO/IEC 9899 - Programming Languages - C. <http://www.open-std.org/JTC1/SC22/WG14/www/standards>, 2013.
- [5] Java platform standard edition 7. <http://docs.oracle.com/javase/7/docs/api/>, 2015. [Online; accessed 10-February-2015].
- [6] List of software bugs. https://en.wikipedia.org/wiki/List_of_software_bugs, 2015. [Online; accessed 12-September-2015].
- [7] Unchecked exceptions — the controversy. <https://docs.oracle.com/javase/tutorial/essential/exceptions/runtime.html>, 2015. [Online; accessed 15-September-2015].
- [8] Douglas Adams. *Dirk Gently’s Holistic Detective Agency*. Pocket Books, 1987.
- [9] Michael Braukus. NASA honors apollo engineer. NASA News, September 2003.
- [10] IEEE Computer Society. Portable Applications Standards Committee, England) Open Group (Reading, Institute of Electrical, Electronics Engineers, and IEEE-SA Standards Board. *Standard for Information Technology: Portable Operating System Interface (POSIX) : Base Specifications*. Number Issue 7 in IEEE Std. 2008.
- [11] Edsger W. Dijkstra. Why numbering should start at zero. <https://www.cs.utexas.edu/users/EWD/transcriptions/EWD08xx/EWD831.html>, 1982. [Online; accessed September 25, 2015].
- [12] Bruce Eckel. *Thinking in Java*. Prentice Hall PTR, Upper Saddle River, NJ, USA, 4th edition, 2005.
- [13] Internet Goons. Do i cast the result of malloc? <http://stackoverflow.com/questions/605845/do-i-cast-the-result-of-malloc>. [Online; accessed September 27, 2015].

- [14] Arend Heyting. *Die formalen Regeln der intuitionistischen Logik*. Berlin, 1930. First use of the notation \neg as a negation operator.
- [15] IEC. *IEC 60559 (1989-01): Binary floating-point arithmetic for microprocessor systems*. 1989. This Standard was formerly known as IEEE 754.
- [16] IEEE Task P754. *IEEE 754-2008, Standard for Floating-Point Arithmetic*. August 2008.
- [17] John McCarthy. Towards a mathematical science of computation. In *In IFIP Congress*, pages 21–28. North-Holland, 1962.
- [18] Brian W. Kernighan. *Programming in C – A Tutorial*. Bell Laboratories, Murray Hill, New Jersey, 1974.
- [19] Brian W. Kernighan. *The C Programming Language*. Prentice Hall Professional Technical Reference, 2nd edition, 1988.
- [20] Tony Long. The man who saved the world by doing ... nothing. *Wired*, September 2007.
- [21] M. V. Wilkes, D. J. Wheeler and S. Gill. *The preparation of programs for an electronic digital computer, with special reference to the EDSAC and the use of a library of subroutines*. Addison-Wesley Press, Cambridge, Mass., 1951.
- [22] Giuseppe Peano. *Studii de Logica Matematica*. In *Atti della Reale Accademia delle scienze di Torino*, volume 32 of *Classe di Scienze Fisiche Matematiche e Naturali*, pages 565–583. Accademia delle Scienze di Torino, Torino, April 1897.
- [23] Bertrand Russell. The theory of implication. *American Journal of Mathematics*, 28:159–202, 1906.
- [24] Bruce A. Tate. *Seven Languages in Seven Weeks: A Pragmatic Guide to Learning Programming Languages*. Pragmatic Bookshelf, 1st edition, 2010.
- [25] Alfred North Whitehead and Bertrand Arthur William Russell. *Principia mathematica; vol. 1*. Cambridge Univ. Press, Cambridge, 1910.