

# CBW's Bookdown Template Documentation

Last Updated: 2024-12-13



# Contents

<b>1 CBW's Bookdown Documentation</b>	<b>7</b>
<b>2 Getting Started</b>	<b>9</b>
2.1 Installation . . . . .	9
<b>3 Creating [RC] and Deploying Your New Workshop</b>	<b>13</b>
3.1 Workshop Setup [RC] . . . . .	13
3.2 Check Your Deploy and See your Website! . . . . .	16
3.3 Setting Up Team Access [RC?] (Nia will fill this in) . . . . .	20
<b>4 Command Line, SSH Connection &amp; Git Clone</b>	<b>21</b>
4.1 Introduction to the Command Line . . . . .	21
4.2 Creating the SSH Connection . . . . .	24
4.3 Getting the Template on Your Local Computer - Git Clone! . . .	28
<b>5 So What Do These Files Mean?</b>	<b>31</b>
5.1 Bookdown Simple Explanation . . . . .	31
5.2 Opening Your Bookdown Project in RStudio . . . . .	31
5.3 Explaining RStudio . . . . .	32
5.4 Build the Book . . . . .	33
5.5 File Setup Explanation . . . . .	35
5.6 Push to GitHub via RStudio . . . . .	38

<b>6 Formatting Your Content - Markdown</b>	<b>43</b>
6.1 Visaul R Markdown . . . . .	43
6.2 Chapters . . . . .	44
6.3 Subheader . . . . .	44
6.4 Parts . . . . .	44
6.5 Text Formatting . . . . .	45
6.6 Citations . . . . .	50
6.7 Equations . . . . .	51
6.8 Theorems and Proofs . . . . .	51
6.9 Callout blocks . . . . .	52
6.10 TIP: Markdown Not Working/Not Enough? Use HTML! . . . . .	53
<b>7 How to Render/Compile Code</b>	<b>55</b>
7.1 [PAGE UNDER CONSTRUCTION] . . . . .	55
7.2 Rendering Code . . . . .	56
7.3 Rendering Code with Highlights . . . . .	56
7.4 Captioned figures and tables . . . . .	56
<b>8 Brain Dump / FAQ</b>	<b>59</b>
8.1 Danger Zones . . . . .	59
8.2 Potential Errors & Bugs . . . . .	59
8.3 Ease of Use . . . . .	61
8.4 FAQs . . . . .	61
<b>I DEVELOPERS GUIDE</b>	<b>63</b>
<b>9 Build Site</b>	<b>65</b>
9.1 How to edit <code>_bookdown.yml</code> . . . . .	65
9.2 How to edit <code>_output.yml</code> (RC) . . . . .	65
9.3 Mandatory “ <code>index.Rmd</code> ” landing page . . . . .	65
9.4 Build the book: . . . . .	66

<b>CONTENTS</b>	<b>5</b>
<b>10 Git Instructions</b>	<b>67</b>
10.1 How to Make a Git Repo (RC) . . . . .	67
10.2 Updating GitHub via RStudio . . . . .	70
<b>11 How to Deploy Your Workshop Website</b>	<b>75</b>
<b>12 Appendix [Links for Developers]</b>	<b>81</b>
12.1 GitHub Repo . . . . .	81
12.2 Diagram Links . . . . .	81



## Chapter 1

# CBW's Bookdown Documentation

Welcome to CBW's documentation for creating a workshop website using Bookdown. Bookdown is an R package that is used to build books, and in our case, the websites hosting CBW's workshops!

You only need to know markdown and whatever coding language you will be using to learn bookdown!

Note, this is the documentation to create a workshop using *bookdown*. If **Jupyter Book** suits you better, see here.

If you don't know which one to use, click [here](#) to learn more!



# Chapter 2

## Getting Started

Bookdown is an open-source R package that helps write books and articles. We will be building our bookdown-based workshop websites using this, specifically the gitbook template. (This is just the name of the specific template style, you will be working in a workshop template that CBW has prepared for you!)

If you're ready to start making a workshop website in bookdown, let's setup your device (PC, laptop)!

First, let's explain installations.

### 2.1 Installation

Since bookdown is an R package, you will need R. Plus, our ideal IDE (integrated development environment i.e. the platform we will be working in) is RStudio.

1. **Download and install R** here. (You need R 3.6.0+ installed for RStudio.) Follow the instructions for your operating system (Linux/macOS/Windows).

Check: You can check if windows was installed properly on *macOS* by running the command R in terminal. On *windows*, –must test–.

Note: We will not be using the R console, instead, we will be using RStudio!

2. **Download and install RStudio** here. Scroll down to find downloads for non-macOS.

Note: While installing, you may be asked whether to install the 32-bit or 64-bit RStudio version. Download the version that matches your PC.

3. **Install Git, if you don't already have it.** Git is a tool that will help us with version control when editing your workshop. Linux and macOS computers tend to have Git installed. Windows computers must install Git. However, make sure to double check if you already have Git, so that you don't have to install it again! Check if you have Git by running this command in terminal/command prompt:

```
git --version
```

```
## git version 2.39.5 (Apple Git-154)
```

If your output looks like “git version X.X.X ...”, you already have git! Move onto step 4!

However, if your output says “Git is not recognized” or a similar statement (such as the one provided below), you do not have Git, so you must install it as well.

```
'git' is not recognized as an internal or external command,
operable program or batch file.
```

### Installing Git on macOS

- When you ran `git --version`, it will have prompted you to install Git. Follow these instructions.

### Installing Git on Windows

- Go to the Git for Windows installer and download Git. Then, install it with all the default settings.

Click here for instructions on [installing Git on Linux](#).

### Double Check!

Check that your install worked! Re-run “git --verison” and check that you get your git version! (On Windows, this may look like “git version 2.47.1.windows.1”).

Note: If you installed Git while having a Command Prompt/Windows PowerShell window open, close this window and open a new one to run “git --version”. This acts as a refresher to Command Prompt/Windows PowerShell.

4. **Install the bookdown R package:** Open RStudio and in the console (in the bottom left window of RStudio) run the following command:  
`install.packages("bookdown")`.

- **Download all the packages you will need!** Do this by running the following command:

```
install.packages(c("magrittr", "stringi", "stringr", "reticulate", "tinytex", "servr"))
```

You may have to approve some downloads. Say “yes” and enter your password when necessary. This tells bookdown you are okay with downloading and installing these packages in their default locations. Finally, **run the following command**

```
tinytex::install_tinytex()
```

We’re ready to start working with CBW’s bookdown workshop template now!

[Go to the next step](#)

Now that you’re done the installations, it’s time to go to the next step: creating a **new** workshop, if you’re a RC, or seeing your deployed website (skip to step 4), if you’re on the workshop team. The order of this documentation is provided in the sidebar on the left. You can also click the arrows below, to go to the previous or subsequent page!



# Chapter 3


## Creating [RC] and Deploying Your New Workshop

Certain aspects of the setup for workshops will be different depending on your role. Headers ending in “[RC]” are for Regional Coordinators. Headers without “[RC]” are assumed to be relevant to both RC and workshop teams.

### 3.1 Workshop Setup [RC]

Regional Coordinators will be tasked with creating and slightly editing each new repository for each new workshop. **Start these instructions with a GitHub account and being logged in.**

1. First, let's go to the bookdown template.
2. Click on the “Use this template” green button, which is to the left of the title of the repository “bookdown-template”. Then, press the dropdown option: “Create a new repository”, as seen below.

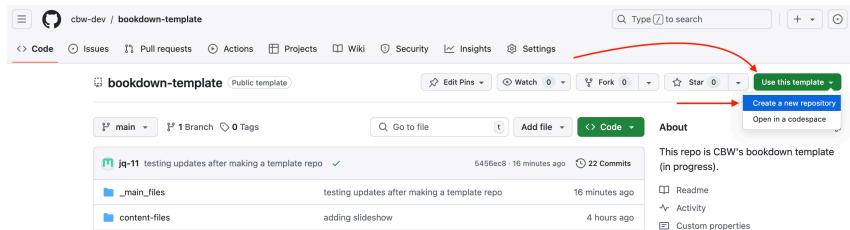

## 14CHAPTER 3. CREATING [RC] AND DEPLOYING YOUR NEW WORKSHOP

3. You will be brought to a “Create a new repository” page. Fill out the blanks as seen below. That is, change the owner to “bioinformatics.ca” [NOTE FOR TESTING PURPOSES: use cbw-dev], make it public, fill in the repository name and description according to CBW Guidelines. “Include all branches” does not need to be selected.

### Create a new repository

A repository contains all project files, including the revision history. Already have a project repository elsewhere? [Import a repository](#).

*Required fields are marked with an asterisk (\*).*

#### Repository template



Start your repository with a template repository's contents.

**Include all branches**

Copy all branches from cbw-dev/bookdown-template and not just the default branch.

#### Owner \*



#### Repository name \*

workshop-name is available.

Great repository names are short and memorable. Need inspiration? How about [silver-enigma](#) ?

#### Description (optional)

#### Public

Anyone on the internet can see this repository. You choose who can commit.

#### Private

You choose who can see and commit to this repository.

You are creating a public repository in the bioinformaticsdotca organization.

**Create repository**

This may take a couple seconds to generate. After it loads, you will be brought to a new repository for the new workshop!

Now, let’s turn this into a website - let’s deploy!


### 3.1.1 Workshop Repo VS Workshop Website

Now, you have made a repository that holds what GitHub needs to make our website (the basic workshop template). Essentially, the template has already been configured so that the html files that make up our website go into a folder called `docs`. We need to tell GitHub to look at the `docs` folder to find our website files and make it available to see online (a.k.a deploy it).


Distinction:

GitHub (ex. <https://github.com/cbw-dev/bookdown-template>) holds your repo, which has version control for all your files! The deployed website (ex. <https://cbw-dev.github.io/bookdown-template/>) has the workshop online.

### 3.1.2 How to Deploy Your Workshop Website

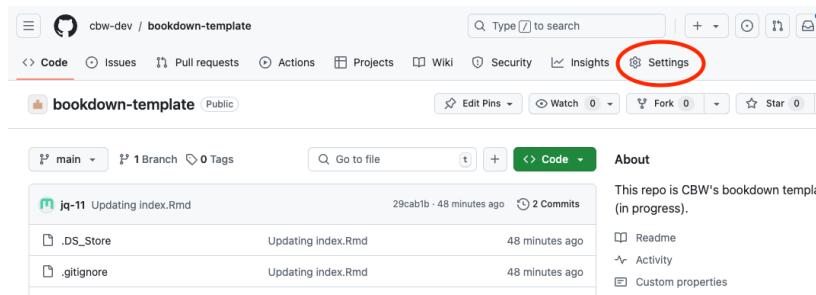


1. In the top navigation bar, select settings.

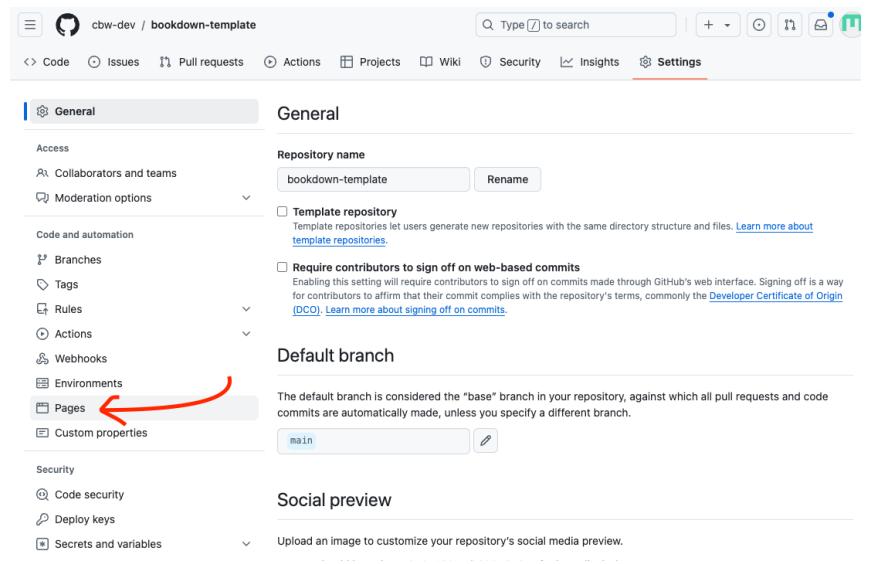

2. Then, go to the pages sidebar.


3. “Deploy from a branch” is already selected, which is what we want. We must change the branch from “none” to “main”. Select the “None” drop-

## 16 CHAPTER 3. CREATING [RC] AND DEPLOYING YOUR NEW WORKSHOP

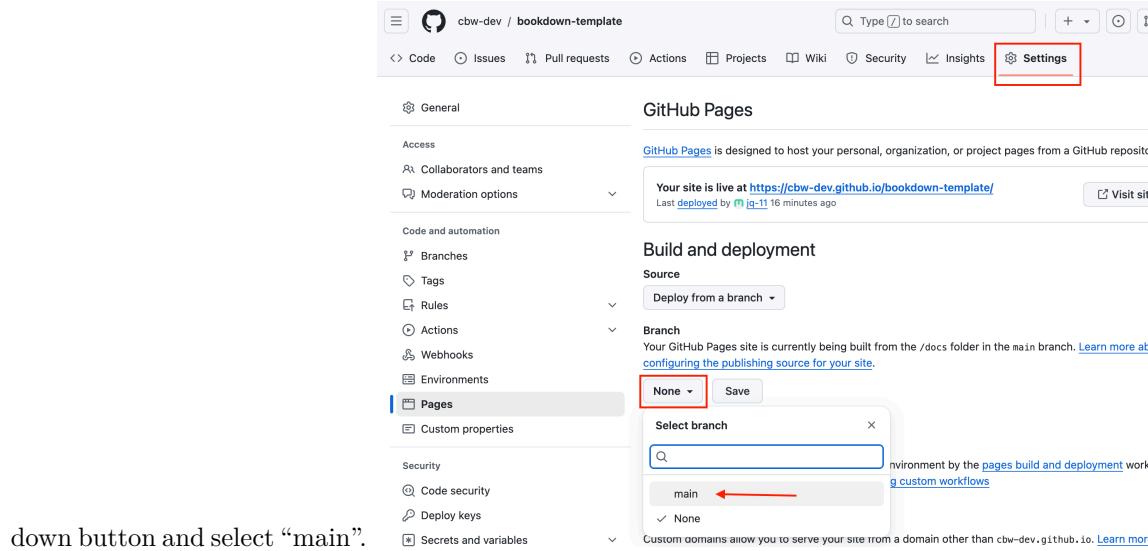

down button and select “main”.

4. Then, change the folder from `/root` to `/docs`. Then press save.

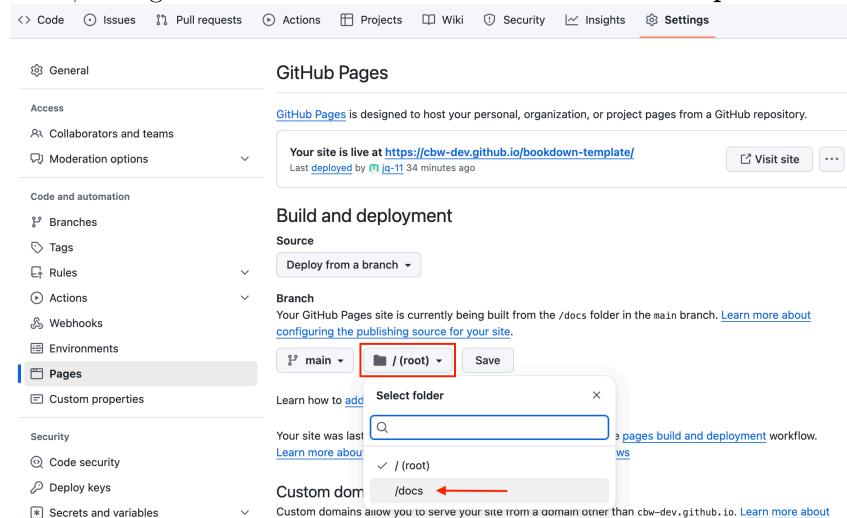


Great! Now we’re waiting on the page to build and deploy, which should take less than a minute.

### 3.2 Check Your Deploy and See your Website!

To see updates, go to the **Actions** page (found along the top navigation bar). This will help you understand how the deploy is working, and if it succeeded or


failed.

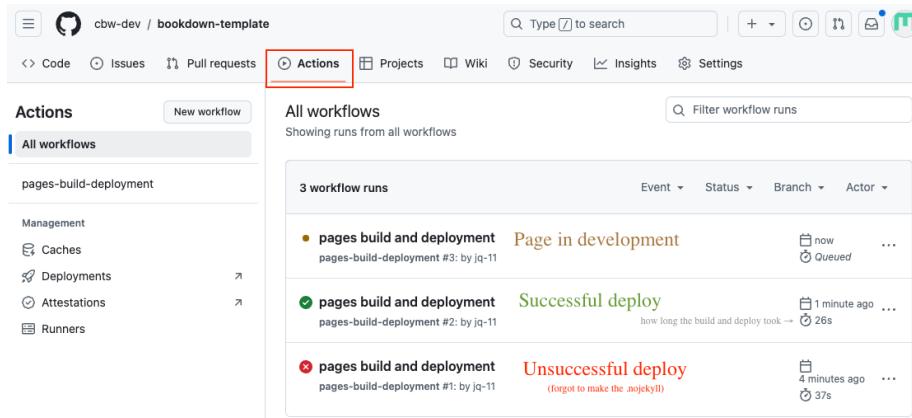

The screenshot shows the GitHub Actions workflow runs page for the repository 'cbw-dev / bookdown-template'. The 'Actions' tab is selected. On the left, there's a sidebar with 'All workflows' selected. The main area shows 'All workflow runs' with a filter bar at the top. There are three workflow runs listed:

- pages build and deployment** (pages-build-deployment #3: by jq-11) - Status: Page in development, Event: now, Status: Queued, Duration: ...
- pages build and deployment** (pages-build-deployment #2: by jq-11) - Status: Successful deploy, Event: 1 minute ago, Status: Success, Duration: 26s
- pages build and deployment** (pages-build-deployment #1: by jq-11) - Status: Unsuccessful deploy (forgot to make the .nojekyll), Event: 4 minutes ago, Status: Failed, Duration: 37s

You can click **pages build and deployment** for updates.

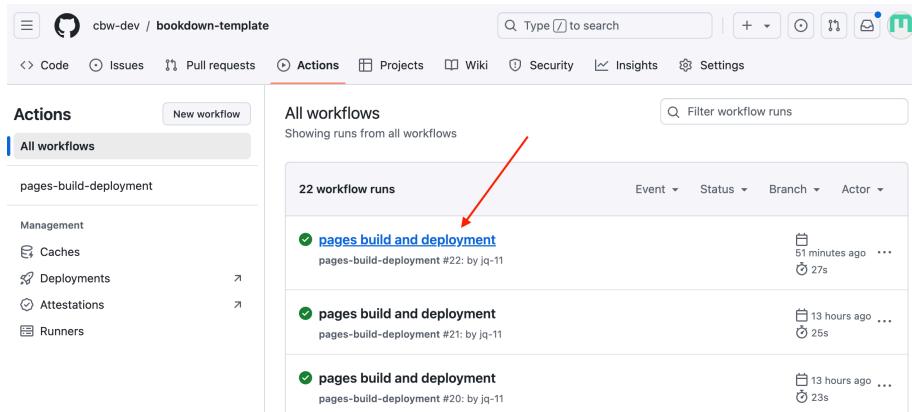


The screenshot shows the GitHub Actions workflow runs page for the same repository. The 'Actions' tab is selected. The sidebar shows 'All workflows' selected. The main area shows 'All workflow runs' with a filter bar at the top. There are 22 workflow runs listed, all marked with a green checkmark and labeled 'pages build and deployment'. A red arrow points to the first run: 'pages build and deployment' (pages-build-deployment #22: by jq-11). The status for these runs varies from 'Success' to 'Completed' with different timestamps.

Figure 3.1: where to click for pages build and deployment information

A successful deploy will have a green checkmark next to it. You can inspect the 3 steps: build, report-build-status, deploy. Once it's done deploying, you can find the website at the link provided under "deploy"!

## 18 CHAPTER 3. CREATING [RC] AND DEPLOYING YOUR NEW WORKSHOP

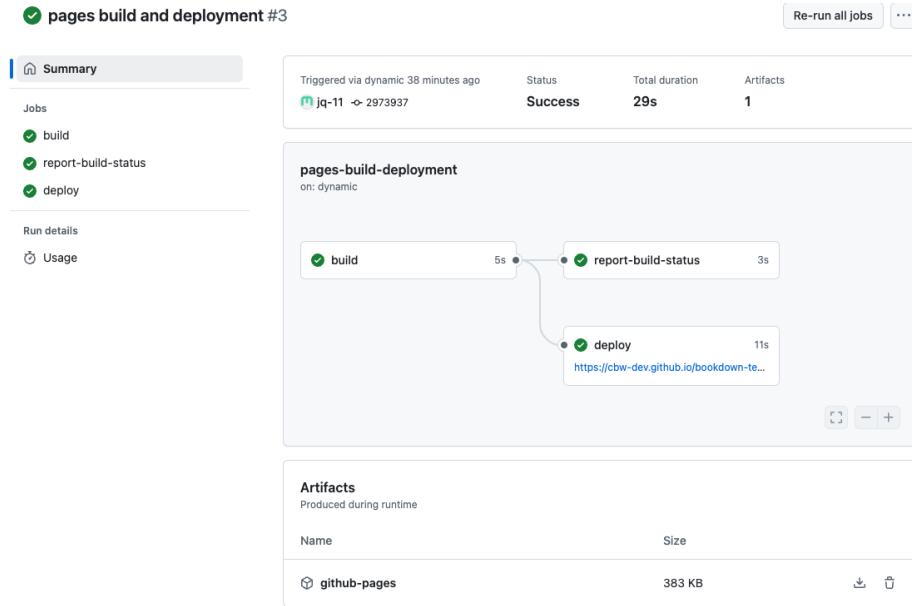

A failed deploy will have a red cross next to it. Clicking through the steps can help you determine what went wrong in the deploy.

Warning: A website can build properly, but may not deploy properly! It is a good idea to check after making big changes.

The screenshot shows a GitHub Actions build summary for a job named "pages build and deployment #1". The job status is "Failure" with a total duration of 37s. The run details show a sequence of steps: "build" (22s), "report-build-status" (3s), and "deploy". A warning message indicates that a deployment was in progress when another began. The annotations section shows the detailed log output for the "build" step.

```

    Logging at level: debug GitHub Pages: github-pages v232 GitHub Pages: jekyll v3.10.0 Theme: jekyll-theme-primer Theme source: /usr/local/bundle/gems/jekyll-theme-primer-0.6.0 Requiring: jekyll-github-metadata Requiring: jekyll-seo-tag Requiring: jekyll-coffeescript Requiring: jekyll-commonmark-ghpages Requiring: jekyll-gist Requiring: jekyll-github-metadata Requiring: jekyll-paginate Requiring: jekyll-relative-links Requiring: jekyll-optimal-front-matter Requiring: jekyll-readme-index Requiring: jekyll-default-layout Requiring: jekyll-titles-from-headings GitHub Metadata: Initializing... Source: /github/workspace/.docs Destination: /github/workspace/.docs/_site Incremental build: disabled. Enable with --incremental Generating... Generating: JekyllOptionalFrontMatter::Generator finished in 1.2012e-05 seconds. Generating: JekyllReadmeIndex::Generator finished in 6.061e-06 seconds. Generating: Jekyll::Paginator::Pagination finished in 2.875e-06 seconds. Generating: JekyllRelativeLinks::Generator finished in 2.2362e-05 seconds. Generating: JekyllDefaultLayout::Generator finished in 1.074e-05 seconds. Generating: JekyllTitlesFromHeadings::Generator finished in 6.602e-06 seconds. Rendering: assets/css/style.scss Pre-Render Hooks: assets/css/style.scss Rendering Markup: assets/css/style.scss github-pages 232 | Error: No such file or directory @ dir_chdir0 - /github/workspace/docs
  
```

## A Very Specific Build and Deployment Warning

The screenshot shows three GitHub notifications. The first is a green checkmark for "pages build and deployment" by "github-pages (bot)" from 1 minute ago. The second is a blue circle for "pages build and deployment" by "github-pages (bot)" from 1 minute ago. The third is a green checkmark for "removing test update" by "01 Build and Deploy Site #34: Commit 6b8f557 pushed by jq-11" from 2 minutes ago.

This is a very specific (and unlikely) warning. It occurs when 1 deploy hasn't finished, but another deploy began. THIS IS NOT A CONCERN. This is a warning message you do not have to worry about!

### 3.3 Setting Up Team Access [RC?] (Nia will fill this in)

## Chapter 4

# Command Line, SSH Connection & Git Clone

If you're familiar with the command line and have already established a SSH connection, continue to git cloning your workshop template locally.

### 4.1 Introduction to the Command Line

This is for those who have no (or extremely little) experience with the command line.

Using the command line, you can use text commands to interact with your computer's operating system. For us, we will be using it to move around our folders and to git clone our workshop into our computer, so we can work on it using RStudio!

Note:

Do not be worried about using terminal, especially git commands in terminal! Once we are all setup, we will never have to touch the terminal and write these commands again!

#### 4.1.1 Terminal, Command Prompt and Windows Power-Shell

We can use the command line using certain tools and applications. Terminal is a Unix-based (meaning Linux and macOS computer already have it) application that allows you to access the command line. Similarly, Command Prompt

(CMD) and Windows PowerShell give access to the command line on Windows computers. However, Terminal, Command Prompt and Windows PowerShell differ in what commands are accepted. The same commands we give to Terminal may not work in Command Prompt and/or Windows PowerShell.

Note: Windows PowerShell tends to be more advanced than Command Prompt, and often can accept more commands that are accepted by Terminal than Command Prompt.

#### 4.1.2 Common Commands (for us)

We won't need to know that many commands, but for easy navigation and understanding, here is what you (generally) need:

**Note:**

Commands are written below as headers, with an explanation provided beneath.

They follow the format: “[Linux Command] OR”[Windows Command]”

**pwd OR echo %cd%** “pwd” stands for “print working directory”. It is a command that works in **Linux** and **Windows PowerShell**. The equivalent in **Command Prompt** is “echo %cd%”. For example, below our output is where in my folders the current .Rmd file that makes up this website is:

```
pwd
```

```
## /Users/jqiu/Documents/CBWgithub/cbw-dev-templates-docs/bookdown-docs
```

**ls OR dir** “ls” is a command that works in **Linux** and **Windows PowerShell**. It's short for “list” and outputs all the files and folders in the directory (folder) you are currently in. (Note: this code only shows 4 files to save space!)

```
ls
```

```
## 01-getting-started.Rmd
## 02-git-clone.Rmd
## 03-terminal-and-git.Rmd
## 04-files-and-build.Rmd
```

A similar command in **Command Prompt** is **dir** (short for “directory”), which also outputs the files and folders in your current directory (along with timestamps)!

**cd** “cd” stands for “change directory”. The command produces no output, but it allows you to go to a different directory than the one you’re currently in. For example,

```
pwd # recall: pwd tells us where we currently are
cd img # img is a folder in bookdown-docs
echo "now switching directories" # outputs the following string
pwd
```

```
## /Users/jqiu/Documents/CBWgithub/cbw-dev-templates-docs/bookdown-docs
## now switching directories
## /Users/jqiu/Documents/CBWgithub/cbw-dev-templates-docs/bookdown-docs/img
```

**Tip:** Typing “cd” and then hitting the `tab` key will give you the available directories you can go to from where you are, or what you have currently typed in. If there is only one option, hitting `tab` will fill in your command with that option. (This works when typing in any file location into your command line, not only using “cd”). On macOS, the terminal will give you a list if there are multiple options. On Windows, both Command Prompt and Windows Powershell will fill in potential options, and you can hit `tab` multiple times until you find your desired file destination.

**File Location Shorthands** When referring to file addresses, there are helpful shorthands! Here’s a summary: `- .` = Current Directory `- ..` = Parent Directory `- ~` = Home Directory

Here’s an example (recall, `cd` produces no output!):

```
pwd
echo -e # creates a line

echo "Current Directory Example"
cd .
pwd
echo -e

echo "Parent Directory Example"
cd ..
pwd
echo -e

echo "Home Directory Example"
```

```
cd ~
pwd
```

```
## /Users/jqiu/Documents/CBWgithub/cbw-dev-templates-docs/bookdown-docs
##
## Current Directory Example
## /Users/jqiu/Documents/CBWgithub/cbw-dev-templates-docs/bookdown-docs
##
## Parent Directory Example
## /Users/jqiu/Documents/CBWgithub/cbw-dev-templates-docs
##
## Home Directory Example
## /Users/jqiu
```

**mkdir** “mkdir [directory address]” stands for “make directory”. Essentially, mkdir will make an empty directory (folder) at a specified location. For example: **mkdir test** would create a folder named “test” in our current directory. The following commands do the same thing. Note: **mkdir ./test** does the same thing.

**rmdir** “rmdir [directory address]” removes an *empty* directory. For example, **rmdir test** would delete the directory we just made!

**rmdir -r OR rmdir /s** “rmdir -r [directory address]” (Terminal & Windows PowerShell) and “rmdir /s [directory address]” removes a directory recursively, meaning it deletes all the contents of the folder as well as the folder in itself. Be careful, you can not restore a directory you removed using “rmdir”!

**Up [] and Down [] Arrows** One of the most useful tips for using the command line is to use your up [ $\uparrow$ ] and down [ $\downarrow$ ] arrow keys. Using the up [ $\uparrow$ ] key gives you the previous commands you typed, and the down [ $\downarrow$ ] arrow returns you to your earlier commands.

## 4.2 Creating the SSH Connection

We need to create an SSH connection. You have already set this up if you have been git cloning, pulling from and pushing to GitHub. If you have, continue to git cloning. If you haven’t, keep reading!

Essentially, we’re doing these steps to update and receive updates from our GitHub repository, with security!

Follow the following 3 main steps. Each of these subheaders links to GitHub's official docs, if you would prefer to follow them instead! (Below is the simplified version of the instructions, if you've already been working with GitHub/SSH connection and want to make a new one, consider using the official docs.) The official docs may be more up-to-date.

*If you do decide to use GitHub's docs, choose the page (the different tabs are clickable at the top of the page) that matches your system (Mac/Windows/Linux).*

Note: You can do these commands anywhere in your files. You do not need to be in your home directory.

#### 4.2.1 Generating a new SSH key

These are the instructions if you have a Linux or macOS computer. Go here for the Windows instructions.

1. Open Terminal.
2. Copy and paste this text into your terminal. **Replace the email given below with your GitHub email address** (the email address you used to sign up for Github). *Keep the quotations in your command.* Press enter to run the command.

```
ssh-keygen -t ed25519 -C "your_email@example.com"
```

You will get this output:

```
> Generating public/private ALGORITHM key pair.  
> Enter a file in which to save the key (/Users/YOU/.ssh/id_ALGORITHM):
```

Press enter. (This uses a default file and default file location.)

Note: Output in your terminal begins with this “>” symbol, as seen above!

If you have already created a SSH key and you are asked to rewrite another key, look at the GitHub Docs for specific steps.

3. Type a secure passphrase (make up a password) when prompted with:

```
> Enter passphrase (empty for no passphrase): [TYPE YOUR PASSPHRASE]
```

**Before you freak out,**

this passphrase is so secretive that won't see it being typed. You won't see a cursor moving and you won't see instead of the characters you're typing. Rest assured, your computer is receiving your text.

If you make a mistake, it's best to hit the "delete" bar many times, and retype.

> Enter same passphrase again: [TYPE THE SAME PASSPHRASE]

You should keep note of this passphrase for your own use. We (should) never have to use it again after finishing these steps.

You will get specific output telling you information about your public key and key fingerprint. This is specific to the SSH connection you just made!

#### 4.2.2 [Linux/Mac] Adding your SSH key to the ssh-agent

1. In terminal, run the following command:

```
eval "$(ssh-agent -s)"
```

You will get this output:

> Agent pid 59566

*(Your number will most likely be different than the one above.)*

2. If you're using macOS Sierra 10.12.2 or later additions, you need to modify your `~/.ssh/config` file.

1. Check if you have a `~/.ssh/config` file: Run the following command:

```
open ~/.ssh/config
```

2. If you get the following output:

> The file /Users/YOU/.ssh/config does not exist.

Create the file using the touch command: run the command given below

```
touch ~/.ssh/config
```

3. Edit your `~/.ssh/config` file using the following instructions. (You can use any text editor you would like, such as vim). Below we use nano as a text editor.

- Run `nano ~/.ssh/config`
- Add the following lines to this file.

```
Host github.com
  AddKeysToAgent yes
  UseKeychain yes
  IdentityFile ~/.ssh/id_ed25519
```

- Exit nano: `ctrl + X`
- Type “Y” and hit enter to save changes, when asked the following

```
Save modified buffer (ANSWERING "No" WILL DESTROY CHANGES) ?
```

3. Return to terminal. Run the following command:

```
ssh-add --apple-use-keychain ~/.ssh/id_ed25519
```

(You may be asked to enter your passphrase again. This is the same passphrase as before.)

#### 4.2.3 [Windows] Adding your SSH key to the ssh-agent

1. Open PowerShell with admin privileges.

#### 4.2.4 Adding a new SSH key to your account

1. Copy the SSH public key: Run the following command to copy the content of the `~/.ssh/id_ed25519.pub` file to your clipboard:

```
pbcopy < ~/.ssh/id_ed25519.pub
```

2. Go to your GitHub account on the GitHub website. Click on your profile picture (icon in the upper right). Then, select **Settings**.
3. Under the “Access” section, click **SSH and GPG keys**.
4. Click **New SSH key** or **Add SSH key**.
5. In the “Title” field, add a descriptive label for this key you are creating (ex. if this is your personal laptop, you can call the key: “Personal Laptop”).
6. Leave the type of key as “authentication” (rather than “signing”). For our purposes, selecting authentication is fine.

7. In the “Key” field, paste (we are pasting what we copied in step 1).
8. Click **Add SSH Key**.
9. If you are prompted, confirm access to your GitHub account.

Finally, we’re all done! We’ve created a SSH connection between your device and GitHub!


Thankfully, we only need to do these steps once! Additionally, most security questions are only asked the first time, so when you work on your workshop in the future, you will not have to redo these steps or confirm authentication.

### 4.3 Getting the Template on Your Local Computer - Git Clone!

1. Navigate to where in your local file system you want to have your workshop in (hint: `cd + tab`).
2. Return to your workshop repository on GitHub.

Find the ssh for your workshop repository:

- First, click the green button entitled `< > Code` and see the drop down options.
- Click the SSH tab, as seen below, and then copy the text below it. The text should be something like `git@github.com:bioinformaticsdotca/WORKSHOP-NAME.git`, as seen below.

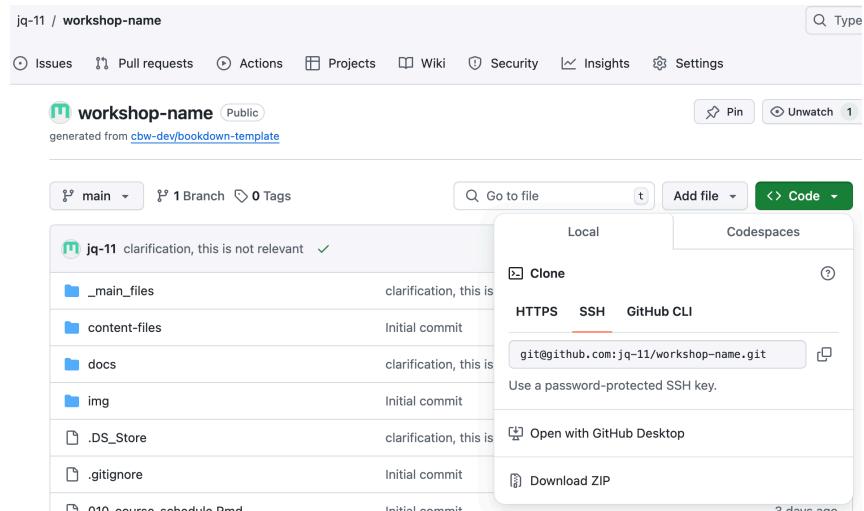

#### *4.3. GETTING THE TEMPLATE ON YOUR LOCAL COMPUTER - GIT CLONE!29*

Then put the following command into your command line, within the folder you want the workshop folder to be in. (For example, if my organization is named: jq-11 and my workshop name is “workshop-name”, I would enter this into my terminal.)

```
git clone git@github.com:jq-11/workshop-name.git
```

3. You should be ready to go! With your given permissions, you should be able to git push (put your local edits on GitHub) and git pull (pull edits on GitHub to your local computer) fine!

NOTE: Consider having only one team member (or perhaps your RC) make git pushes or control pull requests. To avoid merge conflicts, designate 1 team member to control actual changes to your workshop repo. Other team members can fork or create branches, and create a pull request that the designated team member can check and overlook.

But what do any of these files mean? Which ones do I edit? Which ones shouldn't I edit? How do I open this in RStudio? And how exactly is a page made from all these files??? It's time for you to go to the next page :D



# **Chapter 5**

## **So What Do These Files Mean?**

Ok now we have our workshop locally (on our computer), which is made up of all these files and folders?

Before we dive deep into what to do with these folders, let's explore how bookdown actually works and how to understand RStudio.

### **5.1 Bookdown Simple Explanation**

Here is a general summary of how Bookdown creates html websites from .Rmd files.

Essentially, knitr renders and runs all the code, and the outputs are converted into markdown. After knitr, we essentially have a bunch of only markdown files.

Pandoc translates this markdown into html, so that we get a website! It can be helpful to know when and how these packages work, to help debug later on!


Now, let's figure out RStudio. Skip to file setup if you already know how to use RStudio (and it's built in git control window).

### **5.2 Opening Your Bookdown Project in RStudio**

Enter the folder you just git cloned using Finder/File Explorer, it should be titled “[workshop-name]”. Right click on [workshop-name].Rproj and press “Open

in RStudio". There is only one file with this file extension. The .Rproj file is what you will open each time you want to work on this workshop! You must explicitly **open the .Rproj** file to build properly!

A RStudio window should open up and look something like the image below.

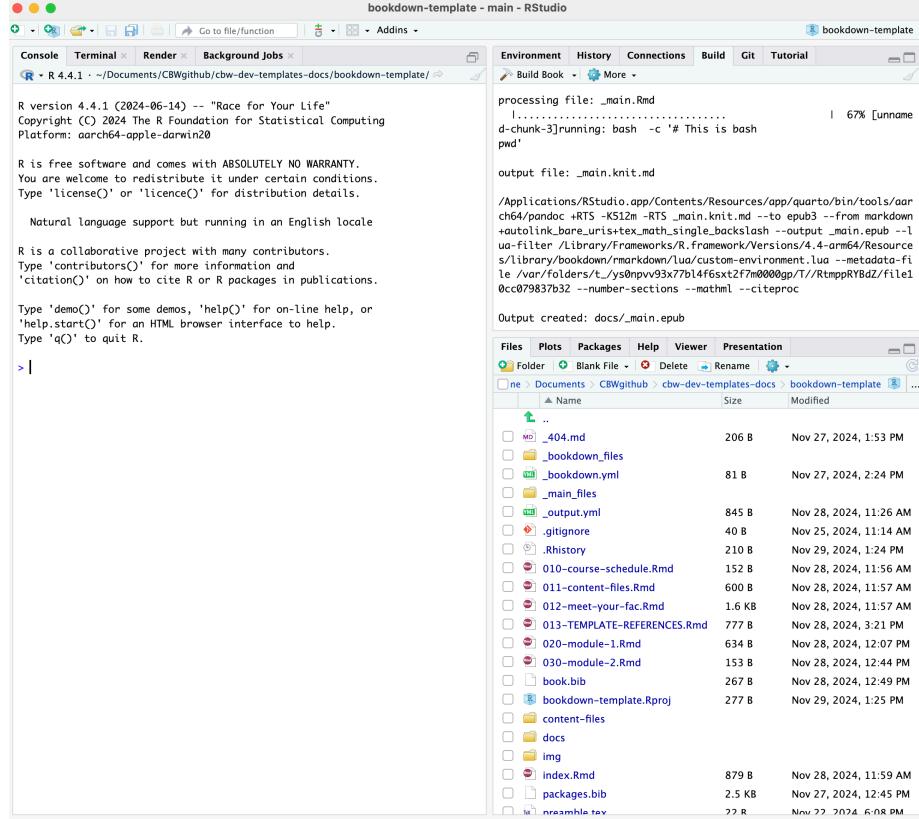

## 5.3 Explaining RStudio

In the bottom right, we have all of our files and subfolders. These files will be explained below. This window also contains helpful views, like “Viewer” and “Plots”. We will touch on these later.

Try opening `index.Rmd`: a new pane will open in the top left that shows the contents of `index.Rmd`. This is where we will be editing our files! Notice, the “Knit” button.

In the bottom left, we have our console and other debug related windows (such as terminal!). Any code we run will appear in the console. We can access the terminal (just like editing in the Terminal app) under the “Terminal” tab.

In your top right, we have a different window with more different views. The most relevant windows to us are the “Build” and the “Git” windows.

No “Git” Window?

Try closing (and maybe even restarting RStudio) and then reopening it. A “Git” tab should appear to the right of the “Build” tab and to the left of the “Tutorial” tab.


## 5.4 Build the Book

Try pressing “Build Book” within the “Build” window. Your build window is going to fill up with text, and soon, a website is going to pop-up as your new window. This is the website you will be editing to create your workshop!

Note: If it’s your first time building, you may have to approve some downloads and installations, like we did in Getting Started!

By building the book, **all** of these files were compiled and converted to .html files, that create a website. Each time we make local changes to our files and we want them to appear in our website, we need to rebuild the book. Note that each time we build our book, the files we edited will be saved first (we don’t have to save before building!).

Note: By default, RStudio will choose to build “All Formats”:

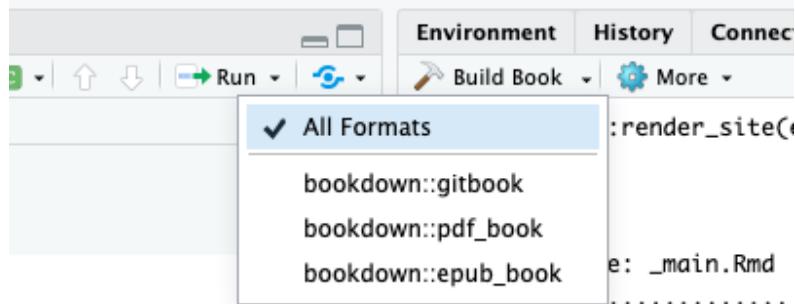

You can choose to only produce a gitbook (the first option). This can be helpful if you are encountering errors claiming that “bookdown::render\_book() failed to render the output format ‘bookdown::pdf\_book’/‘bookdown::epub\_book’”. Additionally, not producing all output formats can decrease your build time significantly! (However, not being able to produce the other outputs may suggest there is an underlying bug. It is ideal to be able to produce all outputs.)

### 5.4.1 Other Ways to Build Your Book

1. Build the book from the R console:

```
bookdown::render_book()
```

2. Press the keyboard buttons: `cmd + shift + B` (macOS) OR `ctrl + shift + B` (windows)

### 5.4.2 Knit Your Book

Building can take a long time. If you are editing just one file, you can press the “Knit” button that is at the top of the window with your file. This will run the code in the page, and show you what that page would look like in the website (as well as saving that file).

Note: Other pages in your website will not update.

A quicker way to knit is using the keyboard controls

`cmd + shift + K` (macOS) OR `ctrl + shift + K` (Windows)

#### 5.4.2.1 Knit VS Build

Building creates the website using **ALL** the .Rmd (and other) files. This is why it takes so long. Knitting creates/updates **only** the .Rmd file you’re currently working in and reruns your code. (Note: You can’t knit a non-.Rmd file!)

Before pushing to GitHub, it is a good idea to build, in case of faulty links or small bugs that occur if you only knit or preview.

### 5.4.3 Preview Your Book

If you want live updates to your changes, you can preview the page as you edit the book when you save individual .Rmd files. You can start the server in a work session by using the RStudio add-in “Preview book”, or from the R console (in the bottom left window):

```
bookdown::serve_book()
```

But which files do we edit? Well alas, it’s time to discuss the file setup.

## 5.5 File Setup Explanation

Recall:

Hence, all the .Rmd files create a page in the produced website! To create more pages, you will be creating more .Rmd files.

Here is a tree diagram of the bookdown template setup. (Note that this mimics how RStudio displays the files, if your RStudio shows these template files in a different order, right click your file window and press “Reload”)

**Note:** only relevant files or files you might be concerned about are explained in blue. If there is no explanation, you can safely assume you do not have to worry about it.

```
bookdown-template
  _404.md # This becomes your 404 page. This is the only file that can become a page that can al
  _bookdown.yml # a config file, you most likely won't have to edit it unless you want additiona
  _bookdown_files
  _main_files
    ... # [in case of confusion: image and pdf output files]
  _output.yml # a config file, RC/workshop team will have to edit a few things (the workshop nam
  .gitignore
  .Rhistory
  010-course-schedule.Rmd # --> "Course Schedule" section
  011-content-files.Rmd # --> "Pre-workshop Materials" and "Computing Setup & Downloads" section
  012-meet-your-fac.Rmd # --> "Meet Your Faculty" section
  020-module-1.Rmd #--> "Module 1", "Lecture, and "Lab" section
  030-module-2.Rmd
  README.md # README file that has some helpful explanations, consider reading this before start
  book.bib # citation file
  bookdown-template.Rproj # always open this file in RStudio, opening this helps bookdown unders
  content-files # store all files from your modules here (ex. data sets, empty code worksheets)
    sample-pdf.pdf
  docs
    ... # html files & other generated content
  img # folder where you should store all your images
    bioinformatics.ca-logo.svg
    faculty # store all images of faculty in this folder
      michelle-brazas.jpg
      nia-hughes.jpeg
    favicon.ico
    sponsors # store all sponsor logos/titles in this folder
      Your-Sponsor-Here.svg
  index.Rmd # landing page --> "Welcome" section
```

```
packages.bib # R generated citation file
preamble.tex
style.css # css styling options are defined here - feel free to add your own styling
```

**\_output.yml & \_bookdown.yml** 2 important files are the `_output.yml` files and the `_bookdown.yml` files. They help tell bookdown what we want and what to do, especially when making our website.

You will only have to edit `_output.yml` a bit. The `_output.yml` file creates the table of contents/sidebar you see on the left of the workshop. It is written in HTML, which is why it looks so different. There are 3 things either the RC or the workshop team will need to do:

1. Change the workshop name: [YOUR WORKSHOP NAME] on line 7.
2. Add your sponsors: Replace “Your-Sponsor-Here.svg” with the file name of your sponsors name/logo. Remember to place these files inside the `./img/sponsors/` folder.
3. Replace your workshop repo edit link. This allows users to suggest edits to your work on GitHub. Follow these instructions (they are also provided in the template).
  1. Go to your `index.Rmd` page on GitHub, Copy and paste the link to it.
  2. Copy and paste the link to it, excluding the “`index.Rmd`” ending.
  3. Add `/%s` to the ending.
  4. Replace the above link.

**Organizing the Table of Contents** The order of the sidebar is completely dependent on the alphabetical order of the files (see your bottom right window pane! The order is generally the same as the order shown in the RStudio file window pane. If not, right click the window and press “Reload”). Our template has numbering first, to help ease our understanding and organization of files. The only file without this is `index.Rmd`, since as the landing page we can not change the file name.

**index.Rmd** The only .Rmd that must have some configuration details is the landing page: `index.Rmd`. This is what fills up the beginning of the `index.Rmd` file, surrounded by the `---`, which tells bookdown the configuration information.

**Follow the instructions in the template’s index.Rmd file - you must fill in the title, author, date and url.** The description, cover-image and github-repo can be changed, but aren’t mandatory.

**.Rmd Files** Let's move on to discussing the breakdown of the .Rmd files. Each new page is defined by a new header, which starts with #, each sub-header has increasingly more # symbols (##, ###, and more all create smaller sub-headers). A "main" header only has 1 # symbol. These headers define new pages, as well as the title in the sidebar referring to that page.

Hence, if we have multiple "main" headers in 1 .Rmd file, 1 .Rmd file will encode multiple pages. Try to have only 1 single # as a header on one page! (You may get warnings otherwise).

However, if a new file only has sub-headers (2 # or more), the sub-header will appear on the page that was defined by the previous .Rmd file (in alphabetical order - see the order of the "File" window pane).

In our template, we want the introduction material to appear on the same page. Hence, the introduction files (other than 020-course-schedule.Rmd, which starts the page) all only have sub-headers.

*Note:* Due to this, you may receive this warning:

Warning message: In split\_chapters(output, gitbook\_page, global\_numbering, split\_by, : You have 6 Rmd input file(s) but only 4 first-level heading(s). Did you forget first-level headings in certain Rmd files?

You can ignore this warning message!

**How to Create a New File** You can create new files anywhere. You should only be making new website pages, so you should also only be making .Rmd files. (Creating new .md files in hopes of making a new page usually ends up with weird bugs, stick to .Rmd files).

1. Under the "Files" tab of the lower right window pane, there are many options to modify your files. You can use these buttons instead of your File Explorer. Click "New Blank File".
2. Click the second dropdown option: R Markdown
3. Give your file a unique name that matches CBW's Bookdown template file naming convention. That is, "0XX-[description].Rmd". Decide what X should be depending on where you want the page to show up on your sidebar. Name your file a short but descriptive name, with hyphens (-) to split up words.
4. Start editing your new file in the upper left window!

**404 Page** That being said, there is one file that can be a markdown (.md) file: the \_404.(R)md file. If website user goes to a webpage that belongs to our website but no longer exists, they will get this 404 page instead. Put links to your landing page for your workshop or the bioinformatics.ca homepage here!

**CBW Organization Folders** We want our workshops to be easy to navigate and understand. Hence, images or files that are required for your lessons should be placed in `./img/` and `./content-files/` respectively. Within these files, try creating sub-folders within these folders to help organize groups of files. For example, if you have a bunch of data sets, try creating a “datasets” folder within `./content-files/`.

Subfolders already exist in `./img`: `./img/faculty/` and `./img/sponsors/`. Fill these with photos of your faculty and images of the names’/logos’ of your sponsors, respectfully!

**Bookdown’s Website Building Folders** Bookdown makes some folders to store `.html` files, among other files that help create the website. Hence, you should not (need to) touch:

- `_bookdown_files`
- `_main_files`
- `docs`

**Debugging Tip:** If you do get an error that seems like it’s coming from one of these files, there was probably an error that resulted from bookdown not being able to process something. Double check that your syntax, formatting, file names and related files are correct.

**Debugging Tip 2:** Each time we build, we produce a “`docs`” folder. If we have already built once, we just add new files to it. HTML files that were produced from `.Rmd` that were deleted are not removed. Hence, if you see errors from files that no longer exist in your root project folder, try deleting the whole `docs` folder, and rebuilding.

## 5.6 Push to GitHub via RStudio

Now, we know what our files mean and how to edit them. How do we get this onto GitHub? We can write git commands into our Terminal/Command Prompt, or alternatively (and more easily), RStudio has a built-in git interface.


Now, we will be able to see a Git window in the top right. Click “Git” to open this window.

The screenshot shows the RStudio interface with the following details:


- Left Panel (Code Editor):** Displays the `index.Rmd` file content, which is a minimal example of using the bookdown package to write a book. It includes sections for book metadata, chapters, and a rendered preview.
- Top Bar:** Shows the project name "bookdown-template - main - RStudio" and various menu items like Environment, History, Connections, Build, Git, Tutorial, and Help.
- Right Panel (File Explorer):** Shows the project structure with files like `bookdown.yml`, `output.yml`, `gitignore`, `Rhistory`, and several Rmd files for chapters 01 through 04, along with their rendered versions.
- Bottom Panel (Console):** Shows R command history and output, including the installation of bookdown version 0.24.1 and the rendering of the book.

Let's say we only edited `index.Rmd`, now we see the newly edited files. Changed files that need to be updated on GitHub will show up in this window, like how `index.Rmd` is seen above. (Do not worry too much about `.DS_Store` and `.gitignore` do.) Let's try to push this change to GitHub.

1. Select all the edited files.

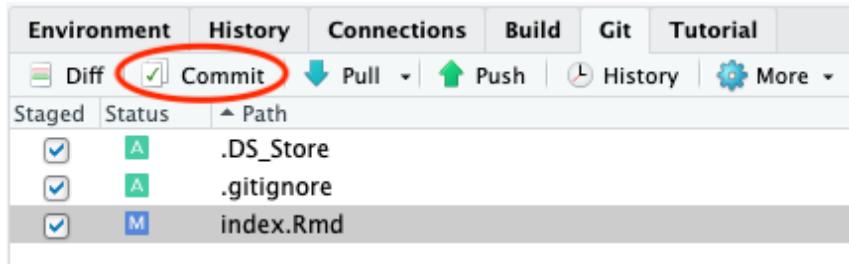

2. Then, click the Commit button, which appears above your selected items. A window pane will appear (shown below).

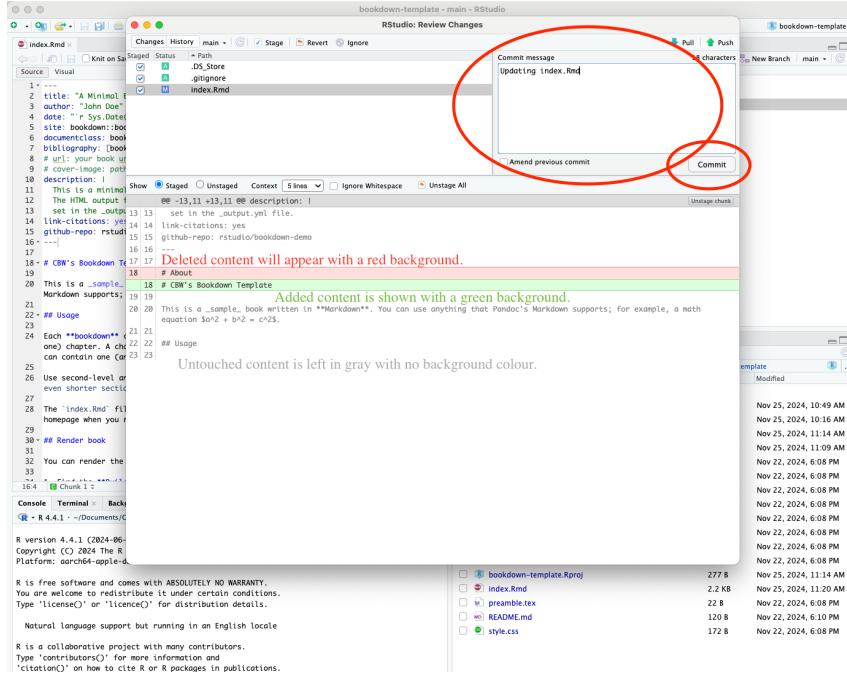

3. Add a commit message in the corresponding box, and then press commit below it.
4. A new window will show up, detailing your updates. Close this window and then press **Push** to push your updates to GitHub.



Now, we're done! We should see the updates on GitHub now. Also note, if we ever want to pull updates from GitHub, there is also a **Pull** button in the Git window within RStudio!

*Git pushing* puts your edits onto GitHub, *git pulling* takes the edits made on GitHub, and brings them to your local computer. For example, if one of your

workshop team members made an edit, you want to have that edit on your computer before you start editing! It's a good idea to do this (git pull - upper right window, "Pull" button) before you start editing, in case somehow your edits conflicts with their edits.

Git pushing will automatically update the website, you can see the updates and progress in the actions window we saw previously. (Check out your website on the web once it's done deploying!)



# Chapter 6

## Formatting Your Content - Markdown

Now we know which files to edit, but how can we edit these files? How do we format our text, links, headers, ...?

### 6.1 Visaul R Markdown

All our files are made up of code and markdown syntax, that becomes formatted into our website. However, if you do not feel comfortable using Markdown (or you just want an easier way to write your pages), see this guide on using Visual R Markdown.

It can be significantly easier to use Visual R Markdown, especially for those who are used to working in Google Docs!

If you want to use Markdown, a basic syntax guide is provided below!

Is this not enough for you?

Bookdown has thorough documentation for specific elements, customizations, and further explanations. For simple elements, everything is provided below. However, there are many more possibilities with Bookdown! Click here to read more!

**IMPORTANT NOTE:** Now that you're straying away from CBW's Bookdown template, there's a chance you may run into errors. See this page for help!

## 6.2 Chapters

As mentioned earlier, headers are defined by a # before the title. Subheaders get increasingly more nested as add more # symbols before it. For example,

```
# Hello
```

would create a chapter title. Since there is only one # symbol, this would also create a new page. Again, try to keep only one chapter title per .Rmd file.

```
## Subheader
```

## 6.3 Subheader

This is what a subheader would look like.

```
### Subheader
```

### 6.3.1 Subheader

This is what a subheader with 3 # symbols would look like. You can add as many # symbols as you would like! There is also no limit to the the number of subheaders you can have.

#### An unnumbered subheader

Chapters and sections are numbered by default. To un-number a heading, add a {.unnumbered} or the {-} at the end of the heading. For example, the above subheader was written like this:

```
### An unnumbered subheader {-}
```

## 6.4 Parts

Notice how index.Rmd in our CBW Bookdown template has # (PART) **Introduction {-}** (followed by # Welcome). This creates the “Introduction” section on the sidebar.

There are already 2 main parts in the template: the introduction and modules sections.

If you want to add more parts, simply paste this: `# (PART) [Part Title] {-}` into a new .Rmd file, at the top of the file, before the main `# header` for that page/file.

**Note:** If you would like to have a un-numbered part: Use this syntax: `# (PART\*) [Part Title] {-}`

**Another Note:** A similar un-numbered part is called an “Appendix” and Bookdown. Like a part, paste `# (APPENDIX) [Appendix Name] {-}` it above the “main” header you would like it to be before. All subsequent headers will be described via letters rather than numbers. (If your following headers are un-numbered, an Appendix looks the same as an un-numbered part).

## 6.5 Text Formatting

Before we go ahead with much more formatting possibilities, let's get the basics of markdown formatting options for basic text. (Tip: There are many resources online that can help give more information!)

### Bold

```
**bolded text**
```

**bolded text**

### Italics

```
*italicized text*
```

*italicized text*

### Subscript

$H_{2}O$

$H_2O$

## Superscript

Na<sup>+</sup>

Na<sup>+</sup>

## Footnotes

<sup>^</sup>[] is the formatting for a footnote. For example

Here is a footnote: ^[This is a footnote.].

Here is a footnote: <sup>1</sup>.

(Scroll to the bottom of this page to see it.)

## Horizontal Line

---

---

## Blockquote

```
> blockquote
>
> --- someone who blockquotes
```

blockquote  
— someone who blockquotes

You can put emojis to help these standout! For example:

**Warning:** Do not push the big red button.

## Unordered List

---

<sup>1</sup>This is a footnote.

```
- unordered
  - list
    - element
- cool!
```

- unordered
  - list
    - \* element
- cool!

Warning: Bookdown currently can not render Markdown to-do lists properly. Alternatively, use this tip instead!

## Ordered List

```
1. First item
  1. a <!-- For nesting inside a list, put 2 tabs before the element -->
    2. b
  2. Second item
  3. Third item
```

1. First
  1. a
    1. c
    2. d
  2. b
2. Second
3. Third

## Code

There are 2 ways to write code:

1. `code` which looks like this: `code`
2. Or long pieces of code

```
```
1 + 1 # a line of code
````
```

which would render into the following on your website

```
1 + 1 # a line of code
```

Find more code options and information in the How to Render Code section.

## Images

The basic notation for a file is:

```
![Alt Text](img/.../...)\\
```

For example:

```
![bioinformatics.ca logo](img/bioinformatics.ca-logo.jpg)\\
```



Note: Markdown does not actually require the backslash “\\”. However, since Bookdown uses Pandoc, we should add a backslash so that the alternative text does not become a caption for the image. This occurs when the image is not directly following or followed by text. Here is where it’s discussed in the Pandoc documentation!

Note: Before adding the “\\”, Bookdown will show you the image that you are referring to (double-click the file address link) and it will remain on screen, within your .Rmd file. *You can use this to double check the file address is correct.* After adding the “\\”, you can double-click to check the file address is pointing to the right image (and it should hover below), but it will not remain on screen.

## Links

Links to a webpage are as follows:

```
[Text you want to hyperlink] (website link)
```

For example,

```
Click [here] (https://bioinformatics.ca/) to see the bioinformatics.ca main page!
```

Click here to see the bioinformatics.ca main page!

## Links to Other Pages/Sections within your Workshop Website

Note these steps work for all headers, not just main (1 #) headers:

1. Label the heading: `# Hello world {#nice-label}`.
  - If you do not want to include a label, an automatic label is made: `# Hello world = # Hello world {#hello-world}`.
  - To label an un-numbered heading, use: `# Hello world {-#nice-label}` or `{# Hello world .unnumbered}`.
2. Next, reference the header in either 2 ways:
  - If you want the number referring to your header, use: `\@ref(label-name)`.  
For example:

---

```
Please see Citations \\\ref{citations}.
```

Please see Citations 6.6.

Note: If you use this reference style for an unnumbered header, “??” will be used as the hyperlinked text.

---

- If you want a customizable text hyperlink, use the following:

```
See the [Citations] (#citations)!
```

See the Citations!

## 6.6 Citations

Bookdown can help us create citations!

First, tell bookdown your sources!

```
# automatically create a bib database for R packages
knitr::write_bib(c(
  .packages(), 'bookdown', 'knitr', 'rmarkdown'
), 'packages.bib')
```

This R code created a file called ‘packages.bib’ (which is in the bookdown template) which is now filled with a bunch of bibliography entries. ‘book.bib’ also has a manually entered bibliography entry. We must tell bookdown the files with bibliography information via the YAML `bibliography` key in index.Rmd. A bibliography entry essentially looks like:

```
@type{key,
  title = {...},
  author = {...},
  organization = {...},
  year = {...},
  url = {...},
  ... # see more possible fields at https://en.wikipedia.org/wiki/BibTeX
}
```

`@type` refers to what type of source it is (ex. an article, book, manual, ...). `@key` refers to the name we refer to it by in in-text citations.

For example, `@R-bookdown` renders to Xie [2024]. Adding square brackets also adds parentheses once it’s rendered: so `[@R-bookdown]` becomes [Xie, 2024].

**Note:** The RStudio Visual Markdown Editor can also make it easier to insert citations!

On any page that you cite, a **References** section will be autogenerated at the bottom of that page (scroll down)!

**Note:** When you cite, Bookdown also generates a citation list that it adds at the end of the last page of your website. However, Bookdown does not create a title, so on your very last page, add a `# Reference` main header. (To avoid having a “2 main headers in the same file” error, you can create a new .Rmd file with only `# Reference`).

## 6.7 Equations

Equations are written in latex. You can refer to them with a label you specify after writing it out!

```
\begin{equation}
f\left(k\right) = \binom{n}{k} p^k \left(1-p\right)^{n-k}
(\#eq:binom) # the label!
\end{equation}
```

$$f(k) = \binom{n}{k} p^k (1-p)^{n-k} \quad (6.1)$$

You may refer to using `\@ref(eq:binom)`, for example: `see Equation \@ref(eq:binom)` becomes “see Equation (6.1)”. The number (6.1) depends on the chapter and the number of equations already in said chapter (the first equation will be numbered [chapter number].1).

## 6.8 Theorems and Proofs

We also have specific syntax for theorems and proofs, for example, this code:

```
::: {.theorem #tri}
For a right triangle, if $c$ denotes the *length* of the hypotenuse
and $a$ and $b$ denote the lengths of the **other** two sides, we have
$$a^2 + b^2 = c^2$$
:::
```

**Theorem 6.1.** *For a right triangle, if  $c$  denotes the length of the hypotenuse and  $a$  and  $b$  denote the lengths of the **other** two sides, we have*

$$a^2 + b^2 = c^2$$

Labeled theorems can be referenced in text using `\@ref(thm:tri)`, for example, check out this smart theorem 6.1.

Learn more about styling and syntax for theorems and proofs here!

## 6.9 Callout blocks

CBW's Bookdown template comes equipped with a "warning", "tip" and "note" callout blocks!

Here are the code you will use to add them to your template and the rendered output.

```
::::: {.redbox data-latex=""}
::: {.center data-latex=""}
**WARNING!**
:::

Write your warning text here.
:::::
```

**WARNING!**

Write your warning text here.

```
::::: {.bluebox data-latex=""}
::: {.center data-latex=""}
**NOTE!**
:::

Write your note here.
:::::
```

**NOTE!**

Write your note here.

```
::::: {.greenbox data-latex=""}
::: {.center data-latex=""}
**TIP!**
:::
```

Write your tip here.

::::

TIP!

Write your tip here.

**Formatting Tip:**

Put <br> on the line after :::: to create a line between your callout and the next piece of content.

This formatting is a div that is specified in Pandoc (recall: a library Bookdown uses to create our .html website pages). Bookdown will help colour your divs so that you hopefully won't forget to include the proper amount of colons. This ends your div properly. If you stick to our callouts, you will need 4 colons at the end (::::).

**Known Error:**

If you do not end your div, all following code will not render (as if your book ends with the unfinished div)!

Creating your own callouts can be difficult, and you should account for making sure both the wesbite and pdf (which uses LaTeX, so you will likely have to edit `preamble.tex`) generate properly.

The R Markdown Cookbook provides more help on how to use custom div blocks to design your own callouts: <https://bookdown.org/yihui/rmarkdown-cookbook/custom-blocks.html>.

## 6.10 TIP: Markdown Not Working/Not Enough? Use HTML!

Recall from this diagram that all files are rendered into .html files for the final official website.

Both Knitr and Pandoc will ignore HTML code, so if a certain part of Markdown's formatting isn't working, or you're not satisfied with Markdown's formatting options, use HTML/CSS formatting instead!

Here are some examples:

1. Markdown has no formatting options for underlining. Hence, underline text in a .Rmd file with the following HTML syntax:

```
<u> underlined text</u>
```

underlined text

2. Bookdown currently renders to-do lists incorrectly. Instead, you can use the following HTML code:

```
<div style="list-style-type: none;">  
  <label><input type="checkbox"> check box</label><br>  
</div>
```

check box

# Chapter 7

## How to Render/Compile Code

### 7.1 [PAGE UNDER CONSTRUCTION]

There are many ways to render and compile code using Bookdown!

Here are most of the “language engines” (programming languages) available to render, run and compile in Bookdown!

```
names(knitr::knit_engines$get())
```

```
##  [1] "awk"        "bash"       "coffee"      "gawk"       "groovy"
##  [6] "haskell"    "lein"       "mysql"      "node"       "octave"
## [11] "perl"        "php"        "pgsql"      "Rscript"    "ruby"
## [16] "sas"         "scala"     "sed"        "sh"        "stata"
## [21] "zsh"         "asis"      "asy"        "block"     "block2"
## [26] "bslib"       "c"          "cat"        "cc"        "comment"
## [31] "css"         "dittaa"    "dot"        "embed"     "eviews"
## [36] "exec"        "fortran"   "fortran95"  "go"        "highlight"
## [41] "js"          "julia"     "python"     "R"         "Rcpp"
## [46] "sass"        "scss"      "sql"        "stan"      "targets"
## [51] "tikz"        "verbatim"  "theorem"    "lemma"     "corollary"
## [56] "proposition" "conjecture" "definition" "example"   "exercise"
## [61] "hypothesis"  "proof"     "remark"    "solution"
```

## 7.2 Rendering Code

Just rendering code refers to Bookdown formatting code so that our users can view it. The code does not run or compile. This is very similar to what is shown in 020-module-1.Rmd of the bookdown template.

## 7.3 Rendering Code with Highlights

## 7.4 Captioned figures and tables

Figures and tables *with captions* can also be cross-referenced from elsewhere in your book using `\@ref(fig:chunk-label)` and `\@ref(tab:chunk-label)`, respectively.

See Figure 7.1.

```
par(mar = c(4, 4, .1, .1))
plot(pressure, type = 'b', pch = 19)
```

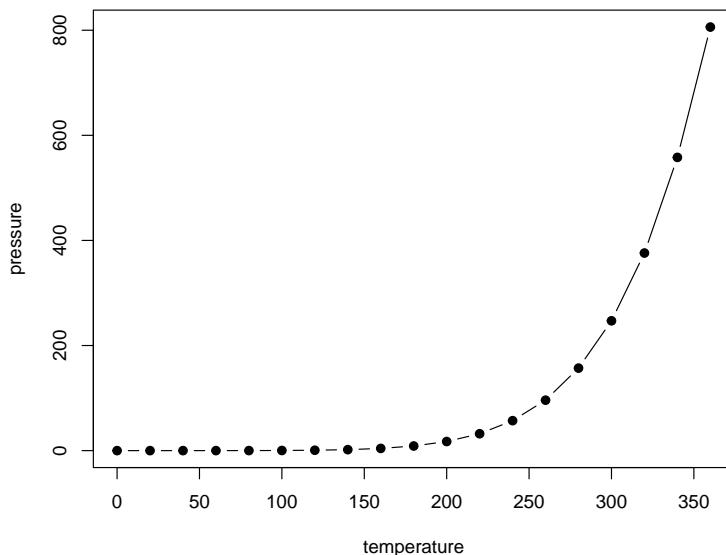


Figure 7.1: Here is a nice figure!

Don't miss Table 7.1.

Table 7.1: Here is a nice table!

| temperature | pressure |
|-------------|----------|
| 0           | 0.0002   |
| 20          | 0.0012   |
| 40          | 0.0060   |
| 60          | 0.0300   |
| 80          | 0.0900   |
| 100         | 0.2700   |
| 120         | 0.7500   |
| 140         | 1.8500   |
| 160         | 4.2000   |
| 180         | 8.8000   |

```
knitr::kable(  
  head(pressure, 10), caption = 'Here is a nice table!',  
  booktabs = TRUE  
)
```



# Chapter 8

# Brain Dump / FAQ

Congrats you got through most of CBW's Bookdown Documentation!

## 8.1 Danger Zones

- renaming your file with this project, doesn't change the .Rprog file!
- GIT TIPS PAGE ???
- BEST PRACTICES PAGE
- MAKE SURE TO EXPLAIN WHAT HAPPENS WHEN MERGE CONFLICTS APPEAR

Ex. Forgot to pull before editing? - Your git window will say (at the top of the window) your branch is ahead of the main branch - You will probably have to deal with a merge conflict - [this is pretty in-depth]

- update favicon.ico image in template with one with higher quality

## 8.2 Potential Errors & Bugs

Trying to build and getting “**Exited with status 1.**”? Bad news: Your book is not building properly. Good news: here are some (*hopefully*) helpful debugging tricks.

- \*\*“Error: LaTeX failed to compile `_main.tex`.\*\* - Essentially, something in your code is not allowing the output to be produced properly. Something in your code is producing incorrect output that is not allowing output to be produced.

TIP: Try to comment out recent changes. Try to decipher what exactly caused the build to fail. This will help you find your bug.

- If you get a bug where your website builds into a website that looks like it is made using very simple html, you may have to change your permissions. If you see “**Permission denied**” in your warning messages, try running this command `chmod -R u+w docs` in terminal, in the folder containing your docs folder [CLARIFY ?]
- “**Could not produce X output**” - by default, bookdown builds all possible formats: gitbook, pdf, epub versions. We only need the gitbook, so if you’re having issues, change your build settings to only creating the gitbook [CLARIFY + INCLUDE IMAGES]
- A very common bug is “**missing X package**”, just install it using this command in your console (the bottom left window in RStudio) `install.packages("missing package name, include these surrounding quotations")`
- Not being able to produce a specific format - If you’re getting one of the following errors:
  - `bookdown::render_book()` failed to render the output format ‘`bookdown::pdf_book`’
  - `bookdown::render_book()` failed to render the output format ‘`bookdown::epub_book`’

There is an easy fix! Press the dropdown options in the “Build Book” button and select “`bookdown::gitbook`”. We only need to produce the gitbook (the html pages!) so it’s ok if we can not produce the other pages. (However, it is ideal if we could produce all format types, since not being able to may lead to more errors.) This was likely due to creating something in one of the other formats that does not work in that format. For example:

`- **"File '...._svg-tex.pdf' is missing."**` is a bug that only occurs when produc

## 8.3 Ease of Use

### 8.3.1 Wrapping Your Code

Sometimes, RStudio defaults so that there is no text wrapping when viewing your files. If you notice that you have to scroll horizontally to see the long lines in your files, turn on “Soft-Wrap Long Lines”.

1. In your upper left corner of your RStudio Window, you will see options “File”, “Edit”, “Code”. (If you are in full-screen on a mac, you will have to bring your cursor to the upper left corner before seeing these options). Click “Code”.
2. Go to the 5th option “Soft-Wrap Long Lines” and select it.

### 8.3.2 Visual R Markdown

If you are having difficulties using Markdown Syntax, RStudio has a work around! See Visaul R Markdown for more information.

## 8.4 FAQs



# **Part I**

# **DEVELOPERS GUIDE**



# Chapter 9

## Build Site

### 9.1 How to edit `_bookdown.yml`

- add a new line, `output_dir: "docs"` to `_bookdown.yml`
- build the site
- add a `.nojekyll` file into the produced docs folder

### 9.2 How to edit `_output.yml` (RC)

- after `before:` change your workshop name link
- after `edit:` put the link to the workshop repo, and end the link with `/%s`
- save

### 9.3 Mandatory “`index.Rmd`” landing page

Each **bookdown** chapter is an .Rmd file, and each .Rmd file can contain one (and only one) chapter. A chapter *must* start with a first-level heading: `# A good chapter`, and can contain one (and only one) first-level heading.

Use second-level and higher headings within chapters like: `## A short section` or `### An even shorter section`.

The `index.Rmd` file is required, and is also your first book chapter. It will be the homepage when you render the book.

## 9.4 Build the book:

- “Build” button in RStudio IDE /OR/ `bookdown::render_book()`
- Preview the book: - updates on saves in viewer window `bookdown::serve_book()`

Before building

### 9.4.1 Render book

You can render the HTML version of this example book without changing anything:

1. Find the **Build** pane in the RStudio IDE, and
2. Click on **Build Book**, then select your output format, or select “All formats” if you’d like to use multiple formats from the same book source files.

Or build the book from the R console:

```
bookdown::render_book()
```

To render this example to PDF as a `bookdown::pdf_book`, you’ll need to install XeLaTeX. You are recommended to install TinyTeX (which includes XeLaTeX): <https://yihui.org/tinytex/>.

### 9.4.2 Preview book

As you work, you may start a local server to live preview this HTML book. This preview will update as you edit the book when you save individual .Rmd files. You can start the server in a work session by using the RStudio add-in “Preview book”, or from the R console:

```
bookdown::serve_book()
```

# Chapter 10

## Git Instructions

### 10.1 How to Make a Git Repo (RC)

1. Go to <https://github.com/cbw-dev> (CHANGE?) and scroll to your repositories.
2. Click the green “New” button to the right of the repositories search bar.
3. Create the new repository. Give it a *name* and *description*. Select *Public* instead of private, as shown below.

Warning

MAKE NAMING CONVENTION

## Create a new repository

A repository contains all project files, including the revision history. Already have a project repository elsewhere? [Import a repository](#).

*Required fields are marked with an asterisk (\*).*

### Repository template

No template ▾

Start your repository with a template repository's contents.

### Owner \*

 cbw-dev ▾

### Repository name \*

/ bookdown-template

 bookdown-template is available.

Great repository names are short and memorable. Need inspiration? How about `supreme-octo-eureka` ?

### Description (optional)

This repo is CBW's bookdown template (in progress).

### Public

Anyone on the internet can see this repository. You choose who can commit.

### Private

You choose who can see and commit to this repository.

### Initialize this repository with:

#### Add a README file

This is where you can write a long description for your project. [Learn more about READMEs](#).

### Add .gitignore

.gitignore template: None ▾

Choose which files not to track from a list of templates. [Learn more about ignoring files](#).

### Choose a license

License: None ▾

A license tells others what they can and can't do with your code. [Learn more about licenses](#).

 You are creating a public repository in the cbw-dev organization.

**Create repository**

- Click the green *Create repository* button at the bottom.

Now, we already have a local project. Now we want it on GitHub, so everyone on your team can make changes to the workshop! Let's make the GitHub connection (i.e let's add our local code to GitHub!)

### 10.1.1 How to Make the Git Connection (Adding your Local Repo to GitHub)

After the previous step, you will be brought to this page. The only things that will differ are the name of the repo.

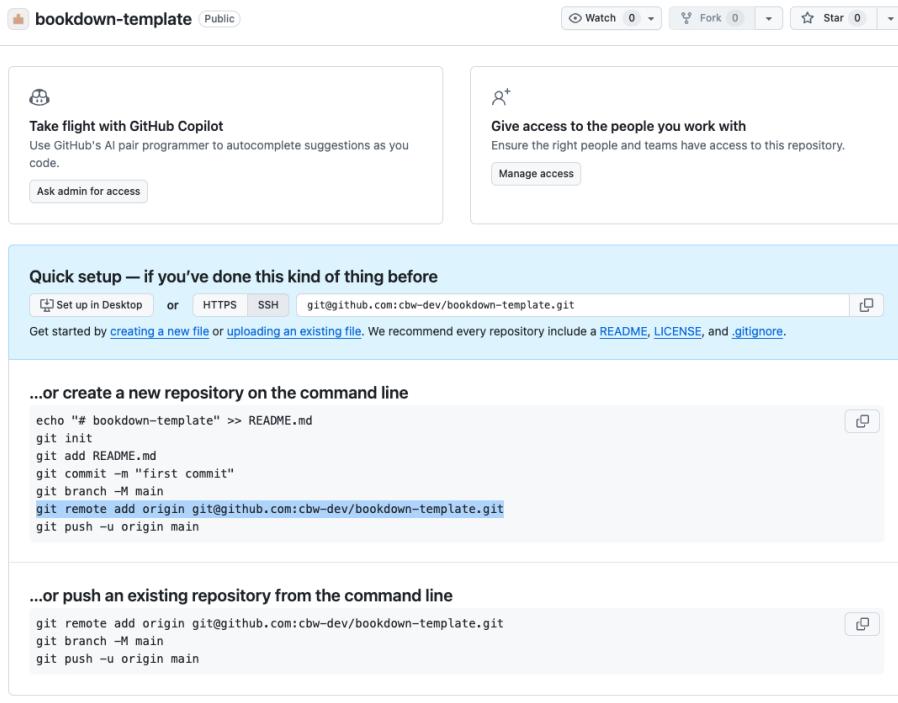


Figure 10.1: landing page after making a git repo

5. Open Terminal (Mac) or Command Prompt/Powershell (Windows).
6. Go to where we created the bookdown project.
7. Once inside the folder with the project. Let's make the git repo. First we initialize: `git init`. (Put this into terminal and press enter.)
8. Let's add all the files: `git add *`
9. Let's commit these files, with a descriptive message to help make it clear to others what we just did. For now, our message can be simple: `git commit -m "first commit"`. (Put this into terminal and press enter.)
10. Next, put this into terminal and press enter: `git branch -M main`.

11. **Important:** This step is why I highlighted that specific text above. Copy that command, and put it into terminal. Generally, it will look something like this: `git remote add origin git@github.com:cbw-dev/NAME-OF-YOUR-REPO.git`
12. Next, put `git push -u origin main` into terminal and press enter.

All the steps are shown below.

```
[jqiuy@ML08034-JQIU ~ % cd Documents/CBWgithub/cbw-dev-templates-docs/bookdown-template
[jqiuy@ML08034-JQIU bookdown-template % git init
[Initialized empty Git repository in /Users/jqiuy/Documents/CBWgithub/cbw-dev-templates-docs/bookdown-template/.git/
[jqiuy@ML08034-JQIU bookdown-template % git add *
[jqiuy@ML08034-JQIU bookdown-template % git commit -m "first commit"
[!main (root-commit) 44aae1d] first commit
[ 15 files changed, 266 insertions(+)
create mode 100644 01-intro.Rmd
create mode 100644 02-cross-refs.Rmd
create mode 100644 03-parts.Rmd
create mode 100644 04-citations.Rmd
create mode 100644 05-blocks.Rmd
create mode 100644 06-share.Rmd
create mode 100644 07-references.Rmd
create mode 100644 README.md
create mode 100644 _bookdown.yml
create mode 100644 _output.yml
create mode 100644 book.bib
create mode 100644 bookdown-template.Rproj
create mode 100644 index.Rmd
create mode 100644 preamble.tex
create mode 100644 style.css
[jqiuy@ML08034-JQIU bookdown-template % git branch -M main
[jqiuy@ML08034-JQIU bookdown-template % git remote add origin git@github.com:cbw-dev/bookdown-template.git
[jqiuy@ML08034-JQIU bookdown-template % git push -u origin main
[Enumerating objects: 17, done.
Counting objects: 100% (17/17), done.
Delta compression using up to 11 threads
Compressing objects: 100% (16/16), done.
Writing objects: 100% (17/17), 5.74 KiB | 2.87 MiB/s, done.
Total 17 (delta 0), reused 0 (delta 0), pack-reused 0
To github.com:cbw-dev/bookdown-template.git
 * [new branch]      main -> main
branch 'main' set up to track 'origin/main'.
[jqiuy@ML08034-JQIU bookdown-template %
```

Figure 10.2: all the git steps typed out into terminal with results

## 10.2 Updating GitHub via RStudio

Now, close your RStudio session, and reopen it.

Now, we will be able to see a Git window in the top right. Click “Git” to open this window.

Let’s say we only edited `index.Rmd`, now we see the newly edited files. (Do not worry too much about `.DS_Store` and `.gitignore` do.) Let’s try to push this change to GitHub.

13. Select all the edited files.
14. Then, click the Commit button, which appears above your selected items. A window pane will appear (shown below).

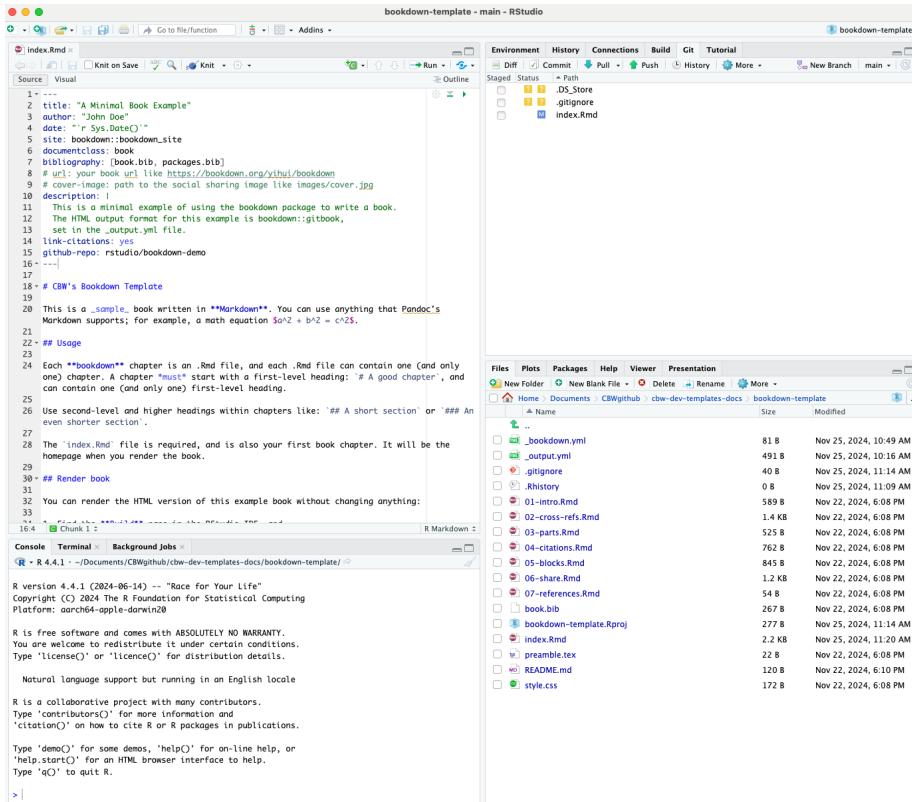


Figure 10.3: RStudio with Git window open

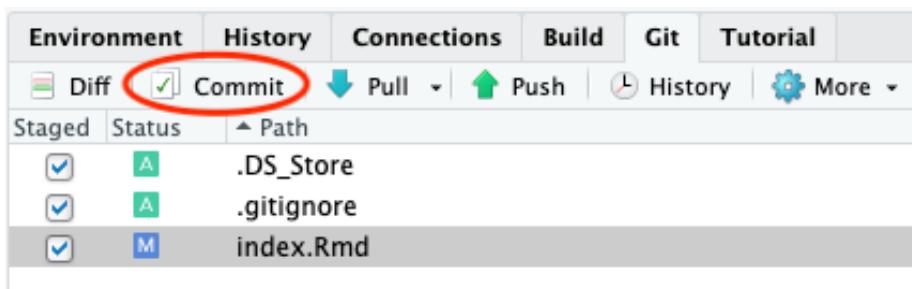


Figure 10.4: selected files in the git window and the commit button highlighted

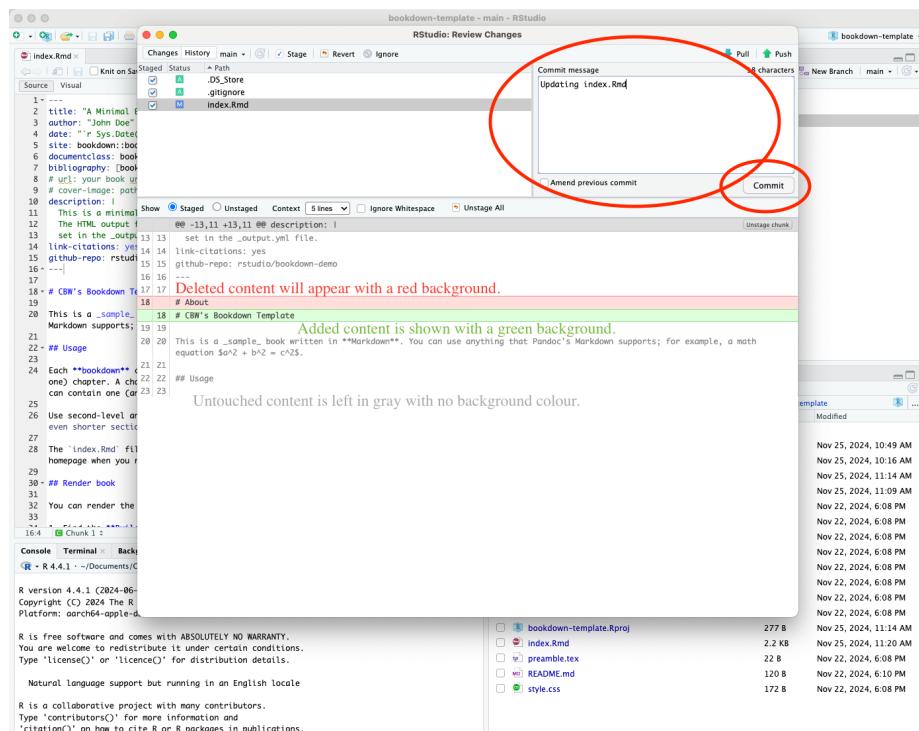


Figure 10.5: git commit window pane

15. Add a commit message in the corresponding box, and then press commit below it.
16. A new window will show up, detailing your updates. Close this window and then press **Push** to push your updates to GitHub.

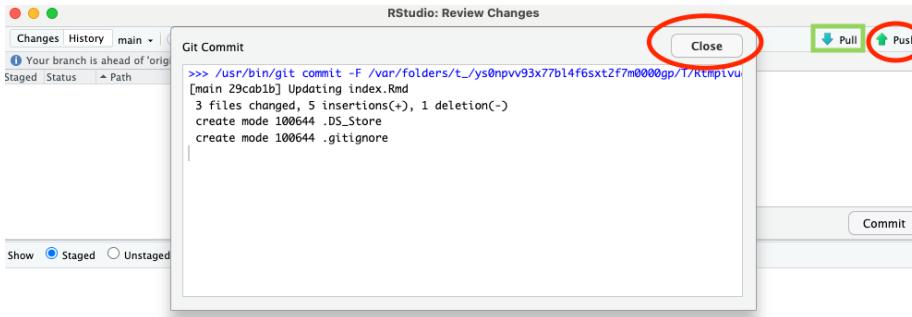


Figure 10.6: post git commit window

Now, we're done! We should see the updates on GitHub now. Also note, if we ever want to pull updates from GitHub, there is also a **Pull** button in the Git window within RStudio!



# Chapter 11

## How to Deploy Your Workshop Website


Let's recap.

We've made a bookdown project that builds into a website. We've reconfigured the output to go to a folder called "docs" (output\_dir: "docs"). We've pushed our content onto github, and also made a ".nojekyll" file, which we placed into docs.


Now in our ./docs folder, we have a bunch of html files that make up our website. We want GitHub to look at these files in the docs folder and host the website for us!

We deploy our website using GitHub pages. GitHub pages uses jekyll, so the .nojekyll file tells it to no longer rely on jekyll. Now, all we need to do is tell GitHub pages to deploy (create/update the website) from our docs folder.

1. Go to your repo on GitHub.

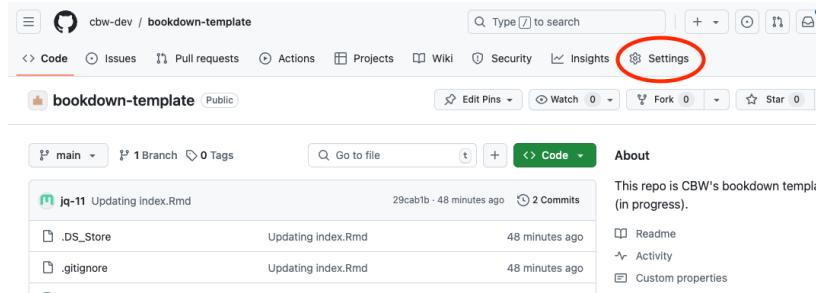


2. In the top navigation bar, select settings.

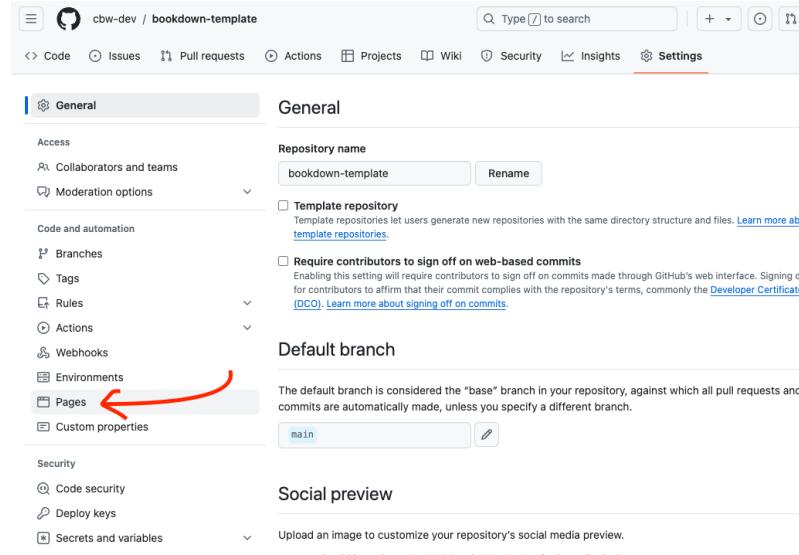

3. Then, go to the pages sidebar.

4. “Deploy from a branch” is already selected, which is what we want. We

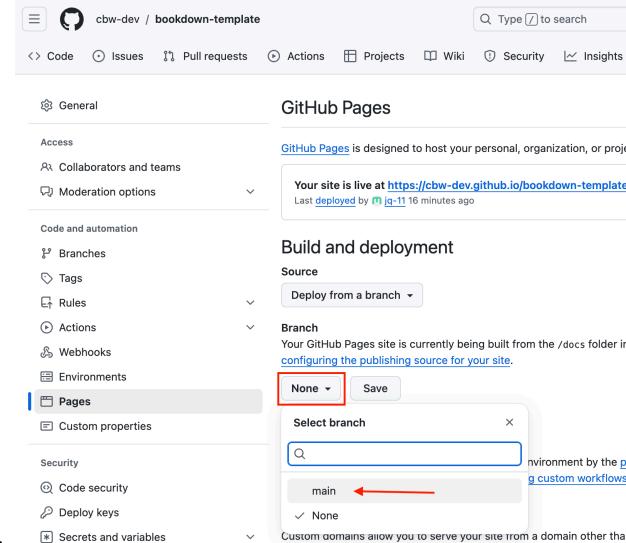

must change the branch from “none” to main.

5. Then, change the folder from `/root` to `/docs`. Then press save.

The screenshot shows the GitHub Pages settings page for a repository. On the left, there's a sidebar with sections like General, Access, Code and automation, and Pages (which is selected). In the main area, under 'Build and deployment', there's a 'Source' dropdown set to 'Deploy from a branch'. Below it, a 'Branch' dropdown is set to 'main'. A 'Select folder' modal is open, showing a search bar and a list with '/root' at the top. An arrow points to the path '/docs' in the list. The 'Custom dom' field is also visible, containing '/docs'. At the bottom of the modal, there's a 'Save' button.

Great! Now we're waiting on the page to build and deploy, which should take less than a minute.

To see updates, go to the **Actions** page (found along the top navigation bar). This will help you understand how the deploy is working, and if it succeeded or failed.

The screenshot shows the GitHub Actions page for the 'bookdown-template' repository. The 'Actions' tab is selected. Under 'All workflows', there's a single entry: 'pages-build-deployment'. The 'Management' sidebar includes 'Caches', 'Deployments' (with an arrow pointing to the 'pages-build-deployment' workflow), 'Attestations', and 'Runners'. The main area displays three workflow runs:

- pages build and deployment** (Status: Page in development) - Last run by jq-11, now, Queued.
- pages build and deployment** (Status: Successful deploy) - Last run by jq-11, 1 minute ago, 26s.
- pages build and deployment** (Status: Unsuccessful deploy) - Last run by jq-11, 4 minutes ago, 37s. The error message says: 'forgot to make the .nojekyll'.

Figure 11.1: Image showing the different possibilities of deploy a github page

You can click **pages build and deployment** for updates. It will give you errors (which may not be very clear) or the link of your deployed page!

pages build and deployment #3

Triggered via dynamic 38 minutes ago    Status Success    Total duration 29s    Artifacts 1

Re-run all jobs ...

**Summary**

Jobs

- build
- report-build-status
- deploy

Run details

Usage

**pages-build-deployment**  
on: dynamic

```
graph LR; build[build] -- "5s" --> reportBuildStatus[report-build-status]; reportBuildStatus -- "3s" --> deploy[deploy];
```

Artifacts

Produced during runtime

| Name         | Size   |
|--------------|--------|
| github-pages | 383 KB |

https://cbw-dev.github.io/bookdown-te...

**✖ pages build and deployment #1**




**Summary**

Triggered via dynamic 41 minutes ago      Status: **Failure**      Total duration: **37s**      Artifacts: -

**Jobs**

- ✖ **build**
- ✓ **report-build-status**
- ⌚ **deploy**

**Run details**

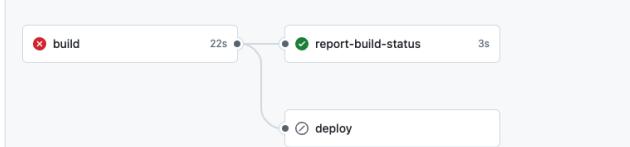

**Usage**

**Annotations**  
1 error

**✖ build**

```
Logging at level: debug GitHub Pages: github-pages v232 GitHub Pages: jekyll v3.10.0 Theme: jekyll-theme-primer Theme source: /usr/local/bundle/gems/jekyll-theme-primer-0.6.0 Requiring: jekyll-github-metadata Requiring: jekyll-seo-tag Requiring: jekyll-coffeescript Requiring: jekyll-commonmark-ghpages Requiring: jekyll-gist Requiring: jekyll-github-metadata Requiring: jekyll-paginate Requiring: jekyll-relative-links Requiring: jekyll-optimal-front-matter Requiring: jekyll-readme-index Requiring: jekyll-default-layout Requiring: jekyll-titles-from-headings GitHub Metadata: Initializing... Source: /github/workspace/.docs Destination: /github/workspace/.docs/_site Incremental build: disabled. Enable with --incremental Generating... Generating: JekyllOptionalFrontMatter::Generator finished in 1.2012e-05 seconds. Generating: JekyllReadmeIndex::Generator finished in 6.061e-06 seconds. Generating: Jekyll::Paginator::Pagination finished in 2.875e-06 seconds. Generating: JekyllRelativeLinks::Generator finished in 2.2362e-05 seconds. Generating: JekyllDefaultLayout::Generator finished in 1.074e-05 seconds. Generating: JekyllTitlesFromHeadings::Generator finished in 6.602e-06 seconds. Rendering: assets/css/style.scss Pre-Render Hooks: assets/css/style.scss Rendering Markup: assets/css/style.scss github-pages 232 | Error: No such file or directory @ dir_chdir0 - /github/workspace/docs
```

Show less

Click around to explore more!



# Chapter 12

## Appendix [Links for Developers]

For the developers of this guide, here are helpful sources.

### 12.1 GitHub Repo

The Bookdown Docs are hosted from the cbw-dev/bookdown-docs public repository.

### 12.2 Diagram Links

Most diagrams shown on these docs **should** be in this Google folder.

#### 12.2.1 How to Edit a Google Drawing

1. Open the drawing.
2. Edit.

Tip: Editing size of the Google Drawing is very easy when you drag the diagonal lines in the bottom right corner.

3. To publish, go to “File > Share > Publish to Web > Embed”. Copy the “Medium” (*optional*) image size HTML code. Paste where you want it to appear in your .Rmd file.

4. Add alt text to the img embed code: Add `alt="Alt Text"` after `src =` ... and before `>`.

Note: Lots of the GitHub clone/deploy/RStudio explaining images are currently locally in the repository, and not on the Google drive.

**References** (the below citation list is auto-generated since we showed examples of citations)

# Bibliography

Yihui Xie. *bookdown: Authoring Books and Technical Documents with R Markdown*, 2024. URL <https://github.com/rstudio/bookdown>. R package version 0.41.