


Public hard-colloid event-clock identifiability audit

Cage-relative Candelier-type segmentation is threshold-stable, but finite field-of-view tracks do not identify a persistence/exchange ratio.

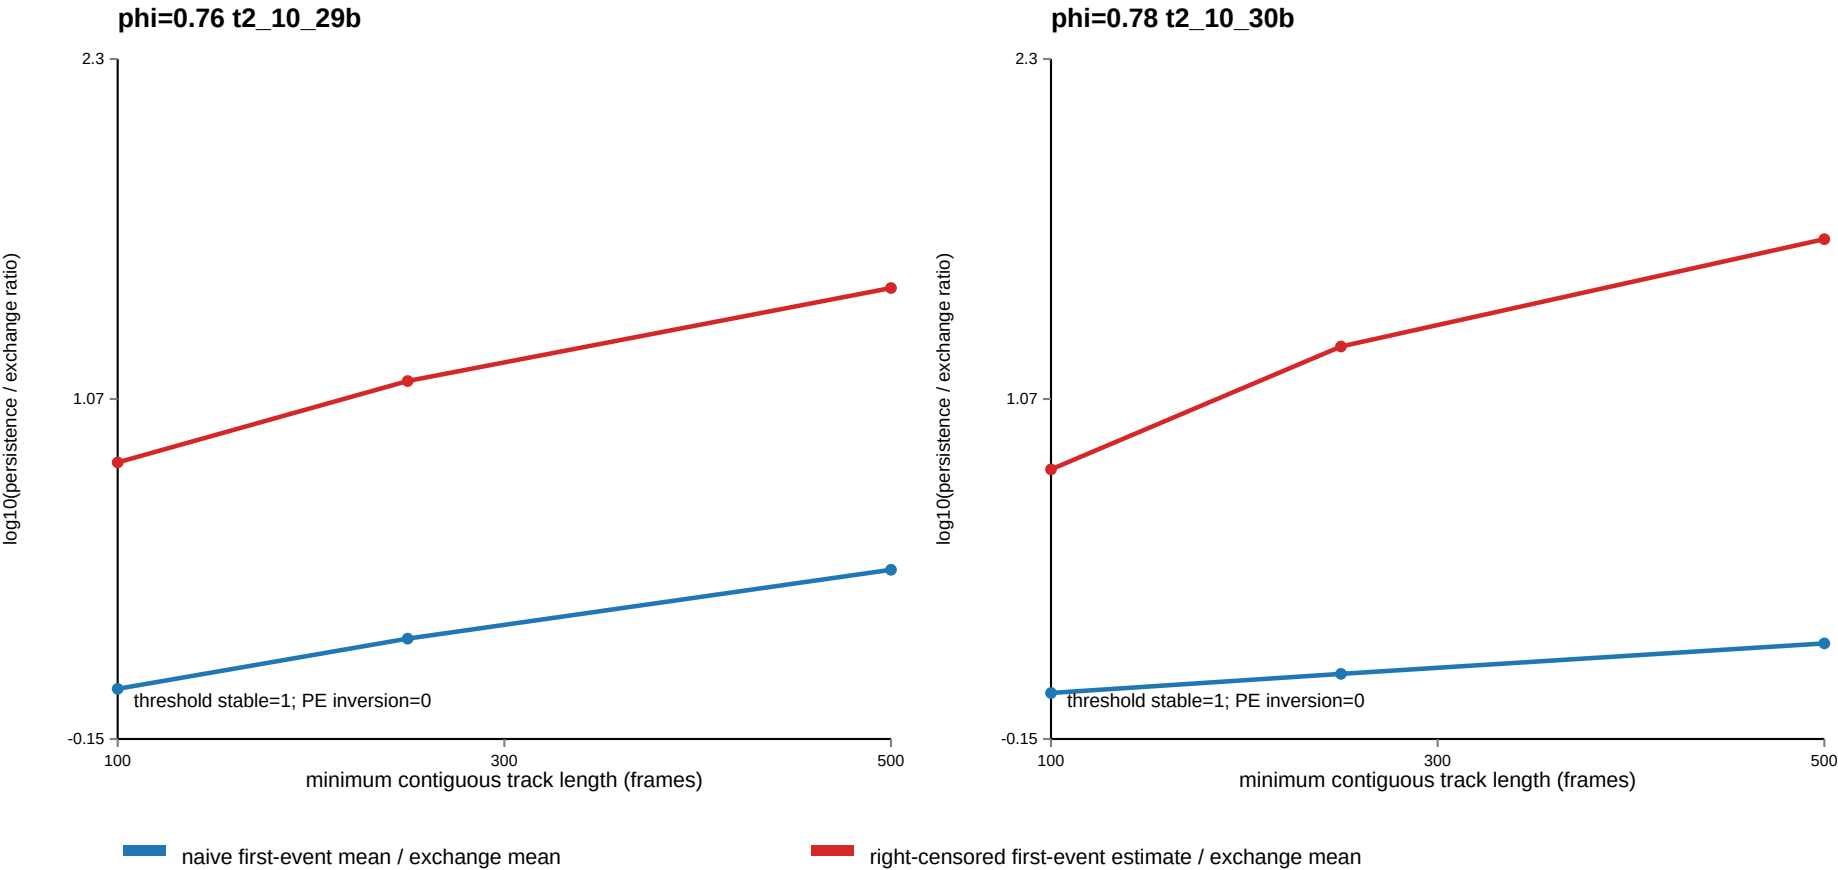

sample	threshold log spread	naive / censored horizon spread	claim boundary
phi=0.76 t2_10_29b	0.070	0.990 / 1.450	observation-window censoring; real PE=0
phi=0.78 t2_10_30b	0.073	0.412 / 1.915	observation-window censoring; real PE=0

Input: public Vivek et al. 2D trajectories. Event segmentation follows the Candelier-type separation score; CSV retains thresholds, coverage, and source fingerprints.