


Public true-time 2D hard-colloid trajectory check

Raw-particle NGP has a peak and late decline; cage-relative recomputation keeps the dynamical signature but blocks mechanism selection.

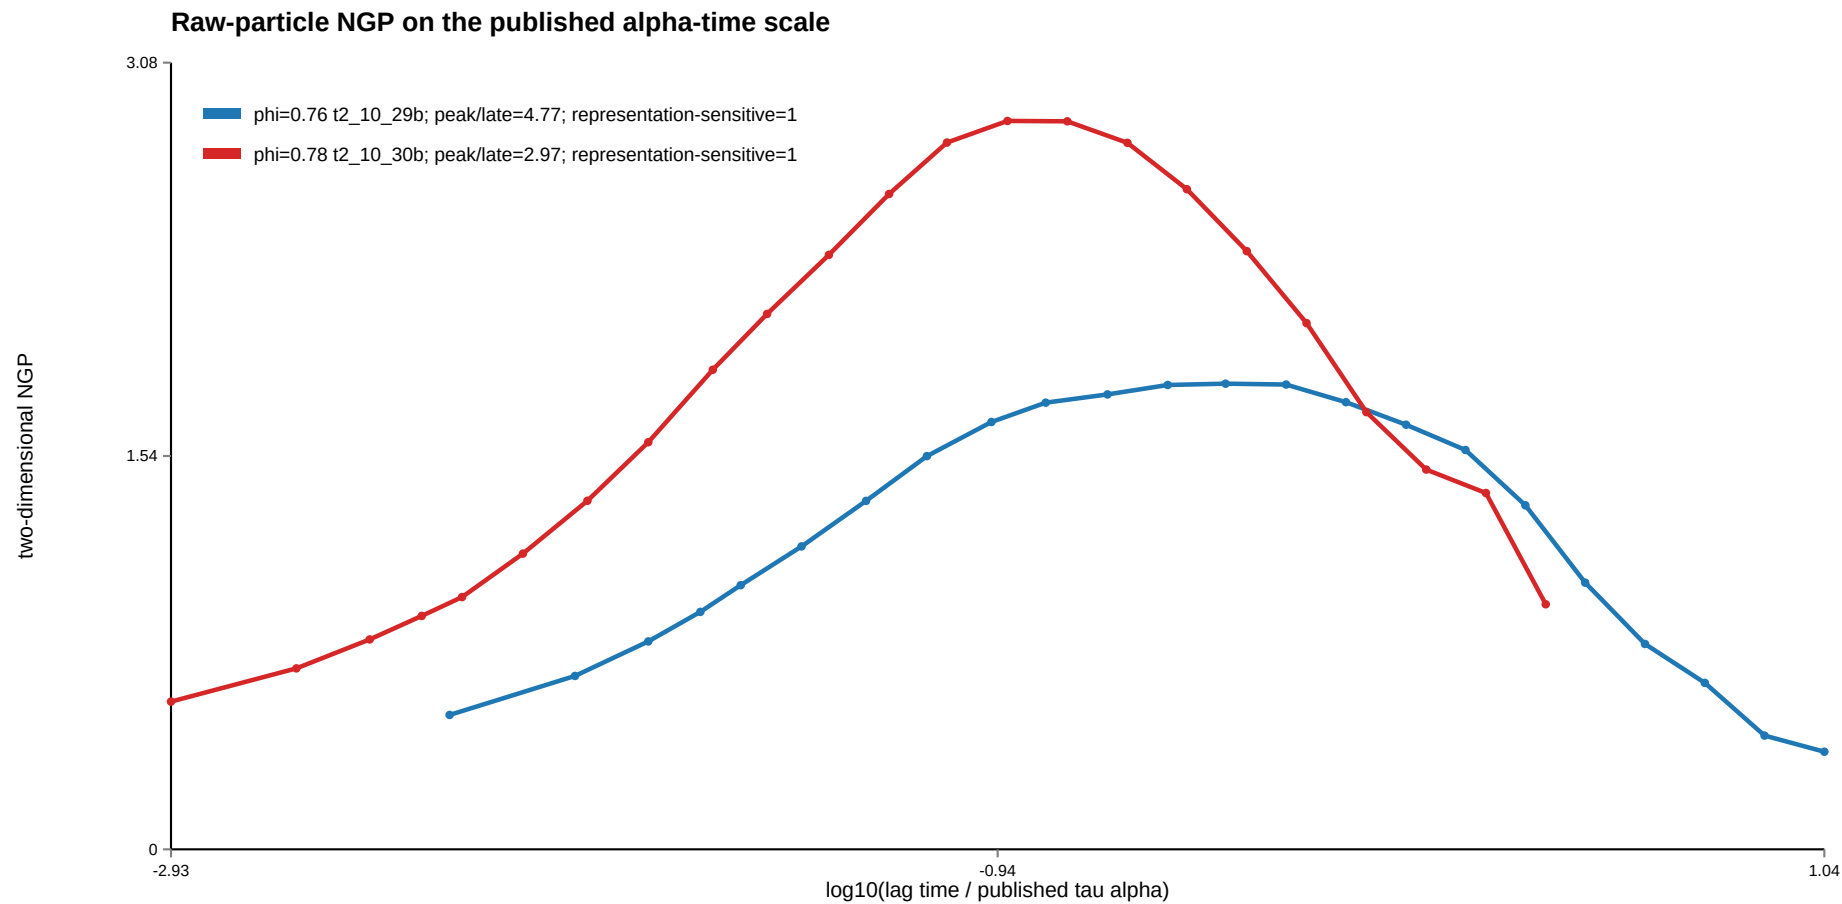

sample	late NGP raw / cage-relative	late pairs	claim boundary
phi=0.76 t2_10_29b	0.382 / 0.822	85078	dynamic signature only; PE=0; finite exchange=0; thermo=0
phi=0.78 t2_10_30b	0.959 / 1.301	121907	dynamic signature only; PE=0; finite exchange=0; thermo=0

Source: Vivek et al. PNAS 114, 1850 (2017). CSV records the public URLs and SHA256 fingerprints; raw archives are deliberately excluded from the arXiv source package.

Primary blocker: two-dimensional representation dependence, then cage-relative event segmentation and a later Gaussian-recovery window.