


Tutorial para publicar en Monsterasp

Profesor: Carlos Arturo Castro Castro

Paso 1 Crear la cuenta en MonsterASP e ingresar al panel

1. Se abre el navegador y se accede al sitio oficial:
<https://www.monsterasp.net>
2. Se crea una cuenta nueva proporcionando nombre, correo electrónico y contraseña.
MonsterASP envía un correo para confirmar la cuenta.
3. Se abre el correo recibido y se utiliza el enlace para activar la cuenta.
4. Una vez activada, se vuelve al sitio y se ingresa desde la opción Login utilizando las credenciales registradas.
5. Al iniciar sesión correctamente, aparece el panel principal identificado como Dashboard o Account Overview.
Ese es el punto de inicio para acceder a todas las funciones del servicio.

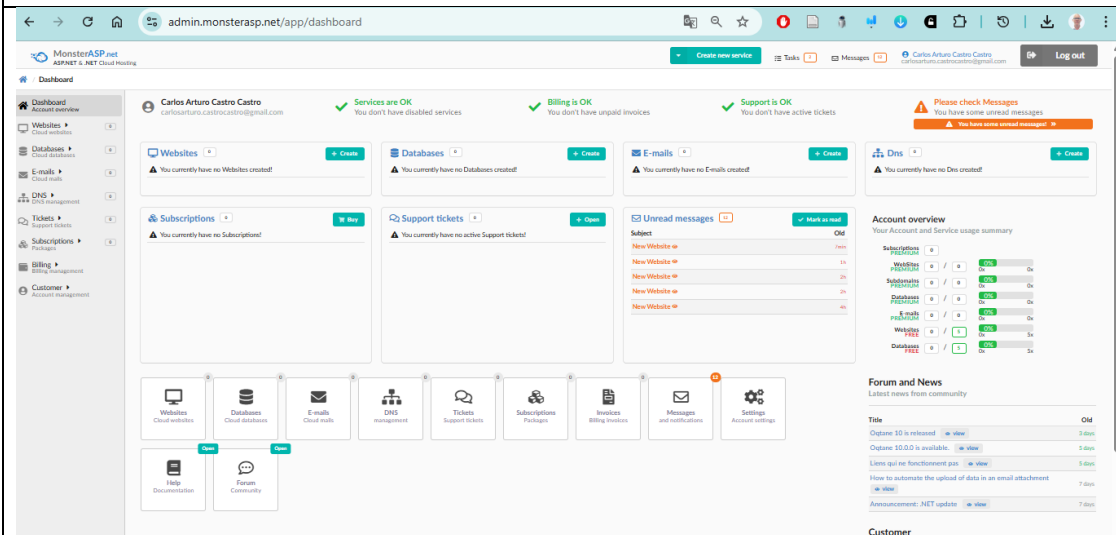

PASO 2 – Crear la base de datos SQL Server en MonsterASP e importar el script de inicialización

1. En el panel principal de MonsterASP, en el menú lateral izquierdo, se selecciona la sección **Databases**.
2. En la parte superior derecha se utiliza el botón **Add Database**.
3. En la pantalla de selección de plan se elige la opción **FREE** mediante el botón **Select FREE database**.
4. En la pantalla de tipo de base de datos, se selecciona **SQL Server 2022** mediante el botón **Select MSSQL database**.
5. En las opciones adicionales se deja la collation predeterminada **SQL_Latin1_General_CP1_CI_AS** y el idioma en **English**.
6. Se continúa con el botón **Continue** y luego se confirma la creación utilizando **Create Database**.

7. Una vez creada la base, se ingresa a su administración mediante el botón **manage**.
8. En el menú lateral izquierdo, dentro de la base de datos, se selecciona la opción **Run T-SQL**.
9. En la ventana de ejecución SQL se pega el contenido completo del archivo **bdfacturas_sqlserver.sql**.
10. Se marca la casilla **Close all connections?** para evitar bloqueos y se ejecuta el script con **Execute T-SQL script**.
11. Una vez finalizado el proceso, se selecciona **Tables list** para confirmar que todas las tablas fueron creadas correctamente.

The image shows two screenshots of the MonsterASP.net web interface. The top screenshot displays the 'Databases' section, which is currently empty. The bottom screenshot shows the 'Create database' wizard, which is divided into four steps: Plan, Database, Subscription, and Location. The 'Plan' step is selected, showing two options: 'PREMIUM' and 'FREE'. The 'PREMIUM' plan is highlighted, and its details are listed below. The 'FREE' plan is also listed, but it is not selected. The 'Subscription' step is also visible, showing 'FREE' as the selected option. The 'Location' step is also visible, showing 'Datacenter' as the selected option. The 'Summary' section on the right shows the selected options: Hosting plan, Database type, Subscription, and Datacenter. The 'Close' button is visible at the bottom of the 'Summary' section.

admin.monterasp.net/app/database

MonsterASP.net
ASP.NET & .NET Cloud Hosting

Create new service | Tools | Messages | Carlos Arturo Castro Castro | CarlosArturo.Castro@monterasp.net | Log out

Databases

Dashboard | Websites | Databases | Add database | E-mails | DNS | Tickets | Subscriptions | Billing | Customer

Databases
Cloud databases

Search
Search... | Search | Records: 15

▲ This list is empty?

admin.monterasp.net/app/database/add/step1

MonsterASP.net
ASP.NET & .NET Cloud Hosting

Create new service | Tools | Messages | Carlos Arturo Castro Castro | CarlosArturo.Castro@monterasp.net | Log out

Databases

Dashboard | Websites | Databases | Add database | E-mails | DNS | Tickets | Subscriptions | Billing | Customer

Create database
Here you can create new database

1 Plan | 2 Database | 3 Subscription | 4 Location

Plan
Hosting plan

Database
Type and settings

Subscription
Package

Location
Datacenter

Summary
Your selected options

Hosting plan
Database type
Subscription
Datacenter

Close

PREMIUM
Cloud database hosting

PREMIUM is designed for your production websites, subdomains, databases, e-mails, APIs, e-shops, blogs, web apps and more. Includes guarantees, support and automatic daily backups. Contains all important hosting features and capabilities.

- ✓ HIGH performance servers AMD+NVMe SSD
- ✓ Starts on 2GB disk space for database
- ✓ SQL Server 2022 Web Edition
- ✓ Compatibility from SQL 2008 to SQL 2022
- ✓ MySQL 8.0
- ✓ Run on compatible MariaDB 10.10
- ✓ Simple Backup and Restore database
- ✓ SQL Management studio and Web Interface
- ✓ MySQL Workbench / HeidiSQL / InnoDB
- ✓ Remote access for database management
- ✓ Unlimited transfers/traffic
- ✓ Automatically daily backups for 14 days
- ✓ EU and USA datacenters

(*) All of these parameters can be extended as necessary via add-ons.

Select PREMIUM database




FREE
Cloud database hosting

FREE is designed for your hobbies, development, testing, POC or preview apps. Not recommended for any production use. No guarantees, support and automatic daily backups. Does not include all hosting features and capabilities.

- ✓ LOW performance servers
- ✓ Max. 1GB disk space for database
- ✓ SQL Server 2022 Express Edition
- ✓ Compatibility from SQL 2008 to SQL 2022
- ✓ MySQL 8.0
- ✓ Run on compatible MariaDB 10.10
- ✓ Simple Backup and Restore database
- ✓ Limited features/capabilities
- ✓ Limited transfers/traffic
- ✓ Limited quantity per customer
- ✓ No guarantees/warranties
- ✓ Only EU datacenters

Select FREE database

wascript_udoPostBack"/>004ContentPlaceholder5btnFree")

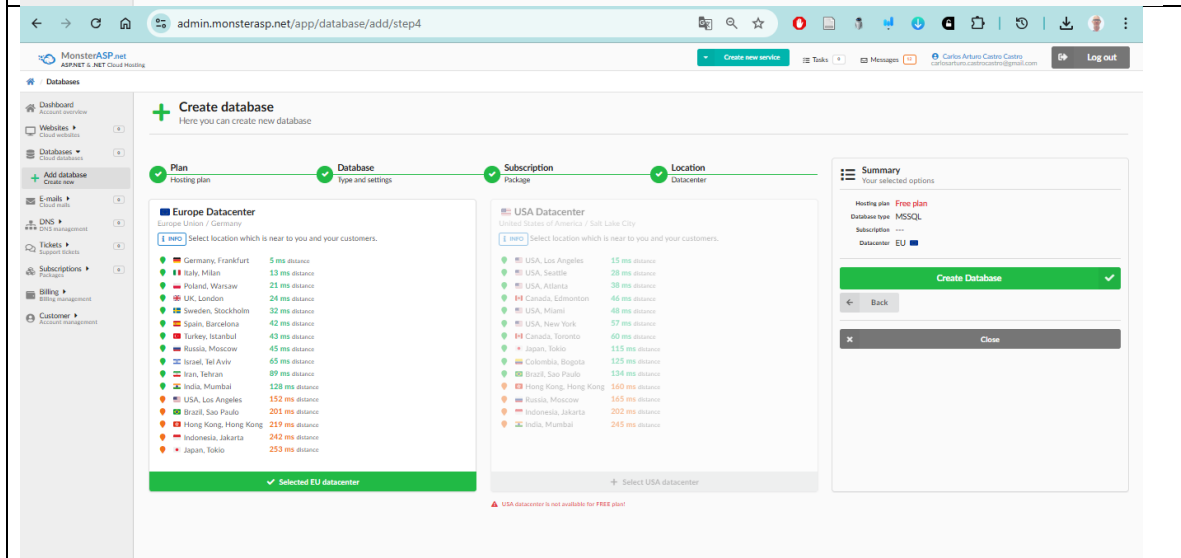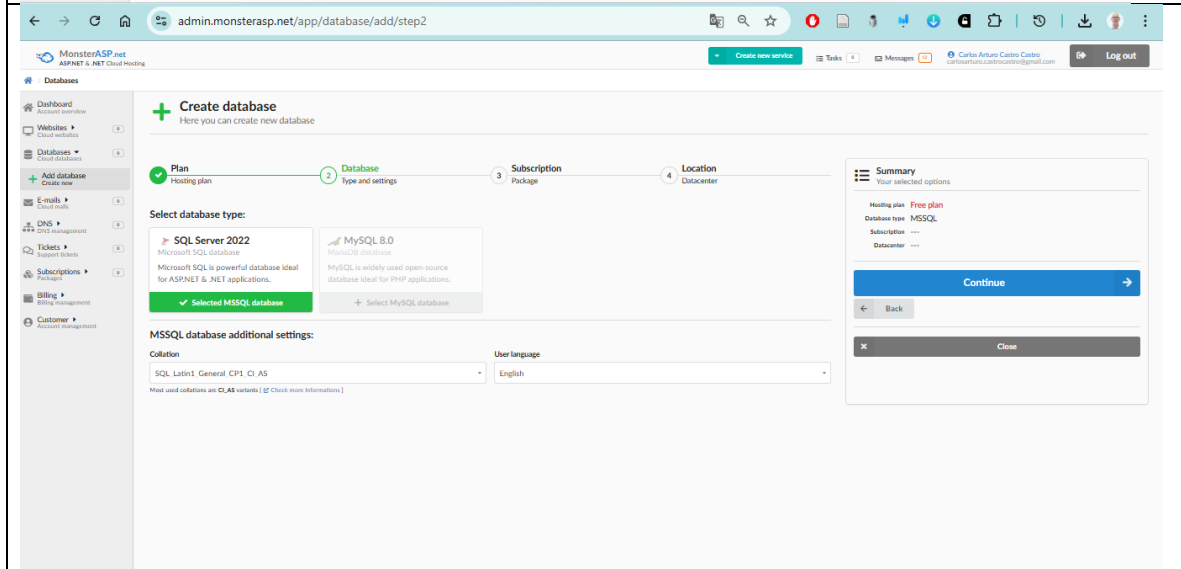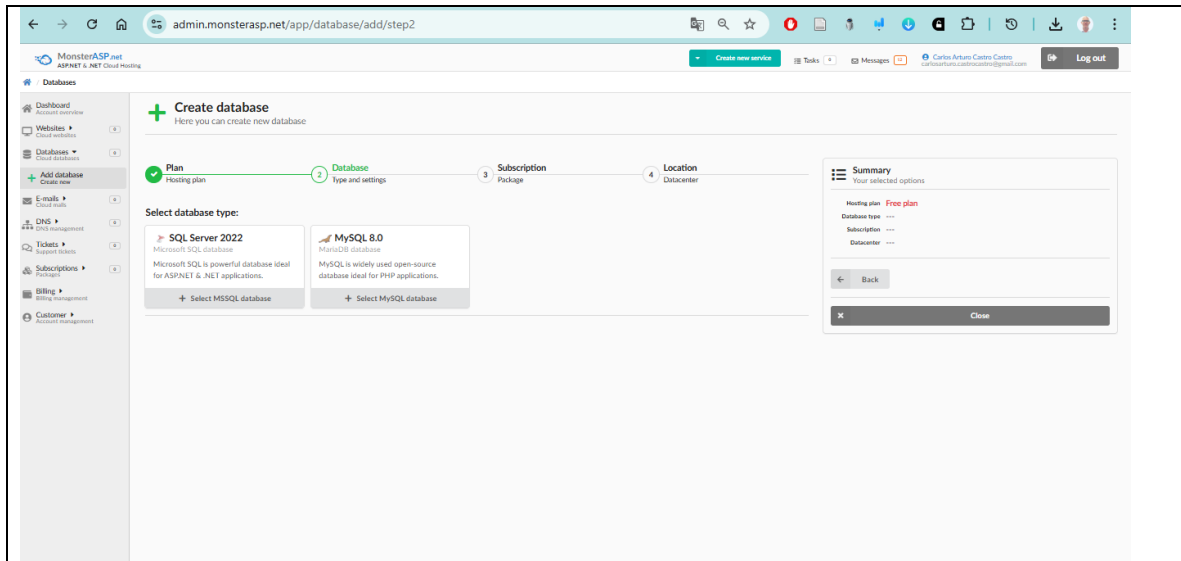

admin.monsterasp.net/app/database

MonsterASP.net
ASP.NET & .NET Cloud Hosting

Done
Database was added

Create new service Tasks Messages Carlos Arturo Castro Castro carlosarturocastro@gmail.com Log out

Databases

Dashboard Account overview
Websites Cloud websites
Databases Cloud databases
Add database Create new
E-mails Cloud mails
DNS DNS management
Tickets Support tickets
Subscriptions Payments
Billing Billing management
Customer Account management

Databases
Cloud databases

Search

Records 15

Status	Type	Name	Subscription	Plan	Region	Server	Disk size
Creating	MSSQL	db33010.databaseasp.net Free plan db33010		Free	EU	Always use this server name.	1024 MB

admin.monsterasp.net/app/database/mssql/info?database=db33010

db33010.databaseasp.net [db33010]
Database overview db33010.databaseasp.net [MSSQL]

Overview
Database settings and details

Free plan

Local access Remote access

Local access [Websites]
MSSQL access details for Websites

Server / Hostname db33010.databaseasp.net
Always use this server name instead of IP address.

Port 1433 [MSSQL]

Login db33010

Password ***** Show Change

WebMSSQL https://webmssql.monsterasp.net [Open]
This link will open web management interface.

Connection string
Server=db33010.databaseasp.net; Database=db33010; User Id=db33010; Password=*****; Encrypt=False; MultipleActiveResultSets=True; Show with password

Info This local connection string is only for use in applications running on hosted Websites. It uses direct connection from your Website to MSSQL database in our datacenter network infrastructure.
For more information you can check: https://www.connectionstrings.com/sql-server/

Overview
Database settings and details

ID db33010

Status Creating

Database db33010
Database not active on server

Name db33010.databaseasp.net Change

Type MSSQL

Free

Subscription db33010.databaseasp.net EU 11
Always use this server name instead of IP address

Server db33010.databaseasp.net

Collation SQL_Latin1_General_CP1_CI_AS Change

Compatibility SQL Server 2002 Change

Quota usage 8 MB 1024 MB

Disk quota
8 MB 1024 MB

BACK to database list Tables Users and Access Process Planned jobs Run T-SQL Execute script Resource usage Backups management Upgrade Transfer / ScaleUp WebMSSQL web interface

Database files
Database files overview

Type	Name	File name	Size used	Size limit
Data	db33010	db33010.mdf	8 MB	1024 MB
Log	db33010_log	db33010_log.ldf	8 MB	5120 MB

admin.monsterasp.net/app/database/mssql/execute?database=db33010

db33010.databaseasp.net [db33010]
Run T-SQL script db33010.databaseasp.net [MSSQL]

Run T-SQL
Enter your T-SQL batch script. It will be executed on database: db33010.databaseasp.net

Close all connections?
This action close all connections to database before execute T-SQL script.

Execute T-SQL script

Result:

admin.monsterasp.net/app/database/mssql/execute?database=db33010

MonsterASP.net
ASP.NET & .NET Cloud Hosting

Create new service Tasks Messages Carlos Arturo Castro Castro carlosarturo.castrocastro@gmail.com Log out

Databases / MSSQL / db33010.databaseasp.net [db33010.databaseasp.net]

db33010.databaseasp.net [db33010]
Run T-SQL script db33010.databaseasp.net [MSSQL]

Run T-SQL
Enter your T-SQL batch script. It will be executed on database: db33010.databaseasp.net

```
-- BASE DE DATOS FACTURACIÓN - SQL SERVER COMPLETO
-- Incluye Tablas, Vistas, Stored Procedures, Datos y RBAC
-- =====
-- TABLAS BASE
-- =====
CREATE TABLE usuarios (
  id INT PRIMARY KEY,
  nombre VARCHAR(50) NOT NULL,
  email VARCHAR(100) NOT NULL,
  telefono VARCHAR(20) NOT NULL
);
```

☒ Close all connections?
This action close all connections to database before execute T-SQL script.

Execute T-SQL script

Result:
DONE: SQL script was executed in database

admin.monsterasp.net/app/database/mssql/table?database=db33010

MonsterASP.net
ASP.NET & .NET Cloud Hosting

Create new service Tasks Messages Carlos Arturo Castro Castro carlosarturo.castrocastro@gmail.com Log out

Databases / MSSQL / db33010.databaseasp.net [db33010.databaseasp.net]

db33010.databaseasp.net [db33010]
Tables list db33010.databaseasp.net [MSSQL]

Delete all content

Search

Records 15




Schema	Table	Rows	Size	Created	Last modified
dbo	cliente	3	0.070312 MB	20.11.2025 19:32	20.11.2025 19:32
dbo	empresa	2	0.070312 MB	20.11.2025 19:32	20.11.2025 19:32
dbo	factura	3	0.070312 MB	20.11.2025 19:32	20.11.2025 19:32
dbo	persona	6	0.070312 MB	20.11.2025 19:32	20.11.2025 19:32
dbo	producto	8	0.070312 MB	20.11.2025 19:32	20.11.2025 19:32
dbo	productosporfactura	6	0.070312 MB	20.11.2025 19:32	20.11.2025 19:32
dbo	rol	5	0.070312 MB	20.11.2025 19:32	20.11.2025 19:32
dbo	rol_usuario	7	0.070312 MB	20.11.2025 19:32	20.11.2025 19:32
dbo	ruta	15	0.070312 MB	20.11.2025 19:32	20.11.2025 19:32
dbo	rutarol	25	0.070312 MB	20.11.2025 19:32	20.11.2025 19:32
dbo	usuario	4	0.070312 MB	20.11.2025 19:32	20.11.2025 19:32
dbo	vendedor	3	0.070312 MB	20.11.2025 19:32	20.11.2025 19:32

WebMSSQL web interface

PASO 3

Crear el sitio en MonsterASP para subir la API.

1. En MonsterASP, en el menú lateral izquierdo, se selecciona **Websites**.
2. Entrar a **Cloud websites**.
3. En la parte superior derecha seleccionar **Add Website**.
4. Elegir la opción **Select FREE website**.
5. Escribir el subdominio que desees usar para la API.
6. Luego continuar hasta crear el sitio.
7. Al final aparecerá el botón **manage** junto al sitio creado.

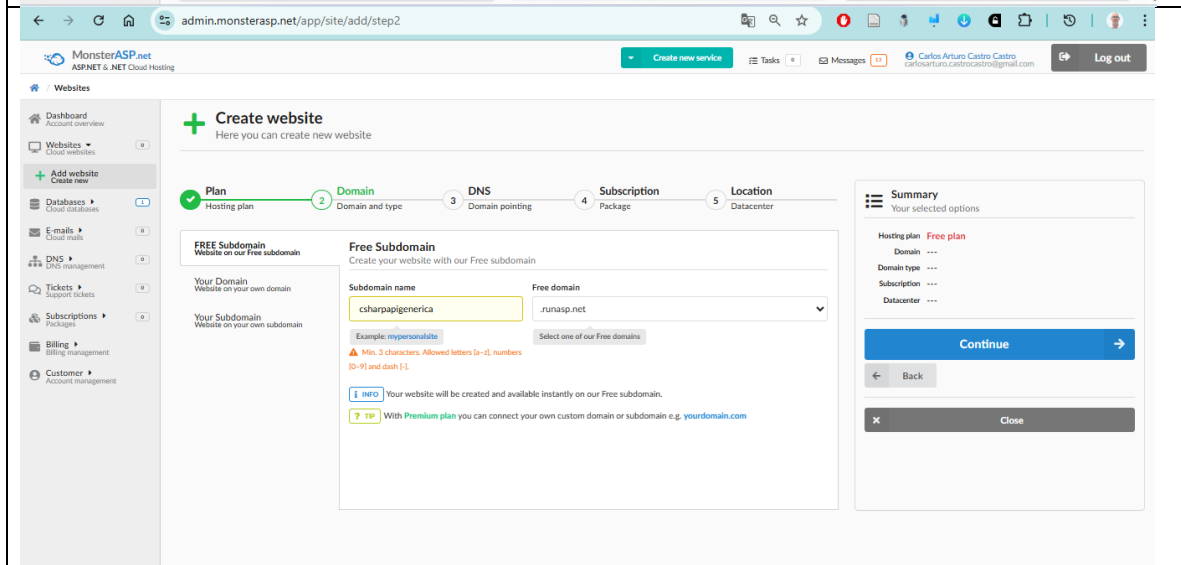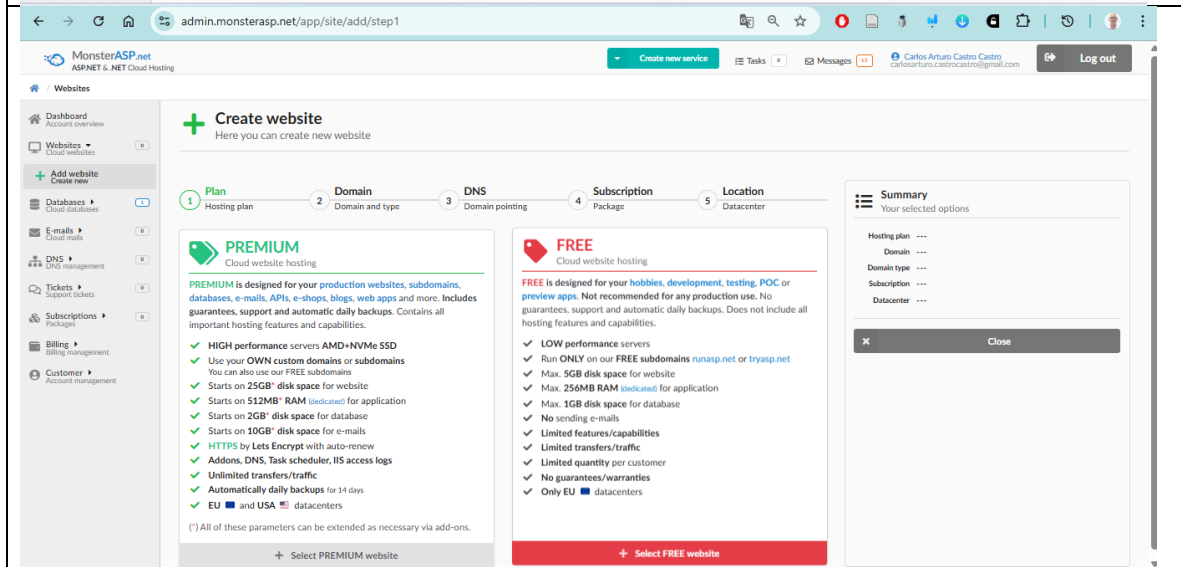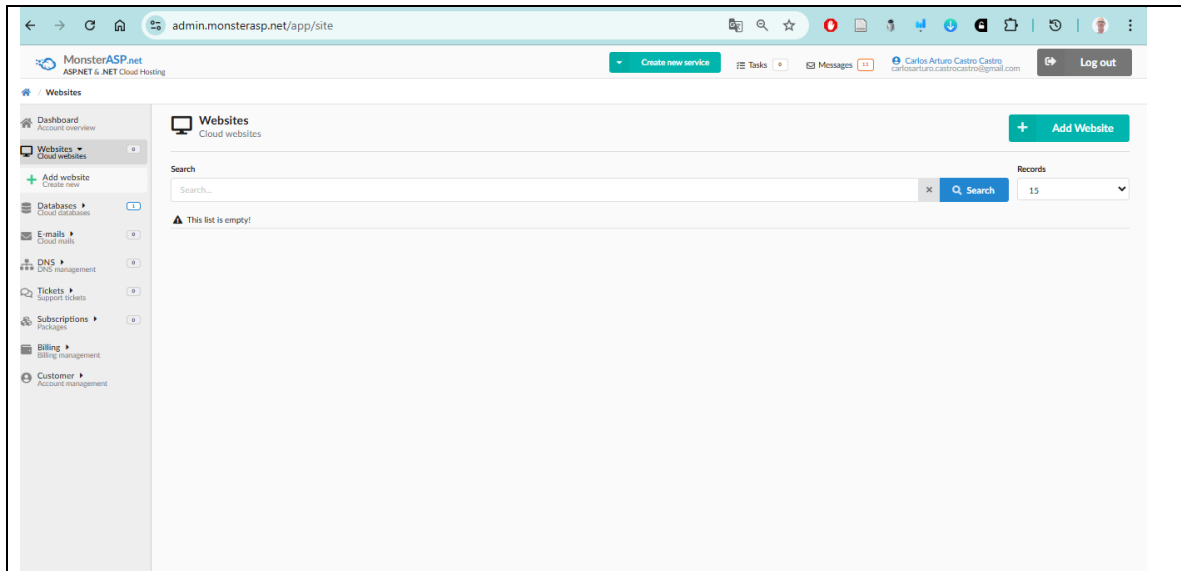

admin.monsterasp.net/app/site/add/step5

MonsterASP.net
ASP.NET & .NET Cloud Hosting

Create new service Tasks Messages Carlos Arturo Castro Castro carlosarturo.castrocastro@gmail.com Log out

Websites

Dashboard Account overview
Websites Cloud websites
Add website Create new
Databases Cloud databases
E-mails Cloud mails
DNS DNS management
Tickets Support tickets
Subscriptions Packages
Billing Billing management
Customer Account management

Create website
Here you can create new website

Plan Domain DNS Subscription Location
Hosting plan Domain and type Domain pointing Package Datacenter

Europe Datacenter
Europe Union / Germany
Select location which is near to you and your customers.

Germany, Frankfurt	5 ms distance
Italy, Milan	13 ms distance
Poland, Warsaw	21 ms distance
UK, London	24 ms distance
Sweden, Stockholm	32 ms distance
Spain, Barcelona	42 ms distance
Turkey, Istanbul	43 ms distance
Russia, Moscow	45 ms distance
Israel, Tel Aviv	65 ms distance
Iran, Tehran	89 ms distance
India, Mumbai	128 ms distance
USA, Los Angeles	152 ms distance
Brazil, Sao Paulo	201 ms distance
Hong Kong, Hong Kong	219 ms distance
Indonesia, Jakarta	242 ms distance
Japan, Tokio	253 ms distance

USA Datacenter
United States of America / Salt Lake City
Select location which is near to you and your customers.

USA, Los Angeles	15 ms distance
USA, Seattle	28 ms distance
USA, Atlanta	38 ms distance
Canada, Edmonton	46 ms distance
USA, Miami	48 ms distance
USA, New York	57 ms distance
Canada, Toronto	60 ms distance
Japan, Tokio	115 ms distance
Columbia, Bogota	125 ms distance
Brazil, Sao Paulo	134 ms distance
Hong Kong, Hong Kong	160 ms distance
Russia, Moscow	165 ms distance
Indonesia, Jakarta	202 ms distance
India, Mumbai	245 ms distance

Summary
Your selected options

Hosting plan Free plan
Domain csharpapigenerica.runasp.net
Domain type Free subdomain
Subscription ---
Datacenter EU

Create Website

Back Close

admin.monsterasp.net/app/site

MonsterASP.net
ASP.NET & .NET Cloud Hosting

Create new service Tasks Messages Carlos Arturo Castro Castro carlosarturo.castrocastro@gmail.com Log out

Websites

Dashboard Account overview
Websites Cloud websites
Add website Create new
Databases Cloud databases
E-mails Cloud mails
DNS DNS management
Tickets Support tickets
Subscriptions Packages
Billing Billing management
Customer Account management

Websites
Cloud websites

Search

Search... Search 15 Records

Status	Name	Domain aliases	Subscription	Plan	Region	Server	Memory	Disk size
Creating	csharpapigenerica.runasp.net	Free plan site44012	Free plan	Free	EU	Always use this server name	256 MB	5120 MB

admin.monsterasp.net/app/site/info?site=site44012

MonsterASP.net
ASP.NET & .NET Cloud Hosting

Create new service Tasks Messages Carlos Arturo Castro Castro carlosarturo.castrocastro@gmail.com Log out

Websites csharpapigenerica.runasp.net [csharpapigenerica.runasp.net]

BACK to website list

csharpapigenerica.runasp.net

Overview
Site settings and details

ID site44012
Status Enabled
Domain csharpapigenerica.runasp.net
Name csharpapigenerica.runasp.net
Plan Free plan
Subscription Free plan
Server site44012.monsterasp.net
IP .NET 10.x/9.x/8.x/7.x/6.x/5.x/4.x Core (64)
Memory limit 256 MB RAM
File count 0
Quota usage 0 MB / 5120 MB

Access to website
FTP and SFTP login details

Server / Hostname	site44012.monsterasp.net
Port	21 (FTP) 22 (SFTP/SCP)
Login	site44012
Password	***** Show password
Website Root	/wwwroot

With these login details you can access website via FTP/SFTP and upload your content directly to website. We recommend using Filezilla client for FTP/SFTP access. Upload all your application files to existing /wwwroot directory.

Quick actions
Start Stop

Quick statistics
Site options
AppPool options
Recycled
Crash
GET

admin.monsterasp.net/app/site/deploy?site=site44012

MonsterASP.net
ASP.NET & .NET Cloud Hosting

Create new service Tasks Messages Carlos Arturo Castro Castro carlosarturocastro@gmail.com Log out

Websites: csharpapigenerica.runasp.net [cf csharpapigenerica.runasp.net]

BACK to website list

csharpapigenerica.runasp.net

Overview Site overview
Files File manager
Domains Domains / Bindings
HTTPS SSL certificates
Deploy FTP / WebDeploy / Git
Scripting ASP.NET / PHP
AppInstaller Application installer
Process Process list
Tasks Planned jobs
Resource Resource usage on server
Logs Error and access logs
Upgrade Transfer / Backup

FTP/SFTP/WebDeploy access: cf csharpapigenerica.runasp.net

Search Search... 15 Records

Status	Login	Path	Password	Permission	Last login
Enabled	site44012	/	***** edit	Read+Write edit	...

FTP/SFTP Access
FTP and SFTP login details
FTP Server site44012@runasp.net [EU] []
Always use this server name instead of IP address.
Port 21 (FTP)
22 (SFTP/SCP)
Login site44012
Password ***** edit Show password
Website Root /wwwroot
WebSFTP https://webftp.monsterasp.net [cf open]
This link will automatically sign you in to web interface.
NOTE With these login details you can access website via FTP/SFTP and upload your content directly to website. We recommend using Filezilla client for FTP/SFTP access. Upload all your application files to existing /wwwroot directory.
HELP How to connect to FTP/SFTP from FileZilla client?

WebDeploy Access
Visual Studio login details
Enabled Disabled [EU] []
Server site44012@runasp.net [EU] []
Always use this server name instead of IP address.
Port 8172
Site site44012
Login site44012
Password ***** edit Show password
Download publish profile
NOTE WebDeploy is best way to deploy your applications directly from Visual Studio. Simply download publish profile and import it into your project in Visual Studio to get started.
HELP How to publish website using WebDeploy from Visual Studio?

Github Deploy
Deploy from remote Github repository
Enabled Disabled [] []
Repository Url
Repository
Branch
Type

admin.monsterasp.net/app/site/deploy?site=site44012

MonsterASP.net
ASP.NET & .NET Cloud Hosting

Create new service Tasks Messages Carlos Arturo Castro Castro carlosarturocastro@gmail.com Log out

Websites: csharpapigenerica.runasp.net [cf csharpapigenerica.runasp.net]

BACK to website list

csharpapigenerica.runasp.net

Overview Site overview
Files File manager
Domains Domains / Bindings
HTTPS SSL certificates
Deploy FTP / WebDeploy / Git
Scripting ASP.NET / PHP
AppInstaller Application installer
Process Process list
Tasks Planned jobs
Resource Resource usage on server
Logs Error and access logs
Upgrade Transfer / Backup

FTP/SFTP/WebDeploy access: cf csharpapigenerica.runasp.net

Search Search... 15 Records

Status	Login	Path	Password	Permission	Last login
Enabled	site44012	/	***** edit	Read+Write edit	...

FTP/SFTP Access
FTP and SFTP login details
FTP Server site44012@runasp.net [EU] []
Always use this server name instead of IP address.
Port 21 (FTP)
22 (SFTP/SCP)
Login site44012
Password ***** edit Show password
Website Root /wwwroot
WebSFTP https://webftp.monsterasp.net [cf open]
This link will automatically sign you in to web interface.
NOTE With these login details you can access website via FTP/SFTP and upload your content directly to website. We recommend using Filezilla client for FTP/SFTP access. Upload all your application files to existing /wwwroot directory.
HELP How to connect to FTP/SFTP from FileZilla client?

WebDeploy Access
Visual Studio login details
Enabled Disabled [EU] []
Server site44012@runasp.net [EU] []
Always use this server name instead of IP address.
Port 8172
Site site44012
Login site44012
Password ***** edit Show password
Download publish profile
NOTE WebDeploy is best way to deploy your applications directly from Visual Studio. Simply download publish profile and import it into your project in Visual Studio to get started.
HELP How to publish website using WebDeploy from Visual Studio?

Github Deploy
Deploy from remote Github repository
Enabled Disabled [] []
Repository Url
Repository
Branch
Type

OneDrive

Nombre: csharpapigenerica.runasp.net-WebDeploy

Tipo: Archivo PUBLISHSETTINGS

```
Archivo  Editar  Buscar  Vista  Codificación  Lenguaje  Configuración  Herramientas  Macro  Ejecutar  Complementos  Pestañas  ?
csharpapigenerica.runasp.net-WebDeploy.publishSettings
1  <?xml version="1.0" encoding="utf-8"?>
2  <publishData>
3    <publishProfile
4      profileName="site44001-WebDeploy"
5      publishMethod="MSDeploy"
6      publishUrl="site44001.siteasp.net"
7      msdeploySite="site44001"
8      userName="site44001"
9      userPWD="3Nz!#x2TM6=f"
10     destinationAppUrl="http://csharpapigenerica.runasp.net/"
11   />
12 </publishData>
13
```


Desinstalar webdeploy (en caso de que no haya sido bien instalado)

En caso de estar bien instalado y el comando `msdeploy -help` no responde

Solo basta con registrar **Agregar Web Deploy al PATH**

Para desinstalar web Deploy

Con **windows R** se escribe `appwiz.cpl`

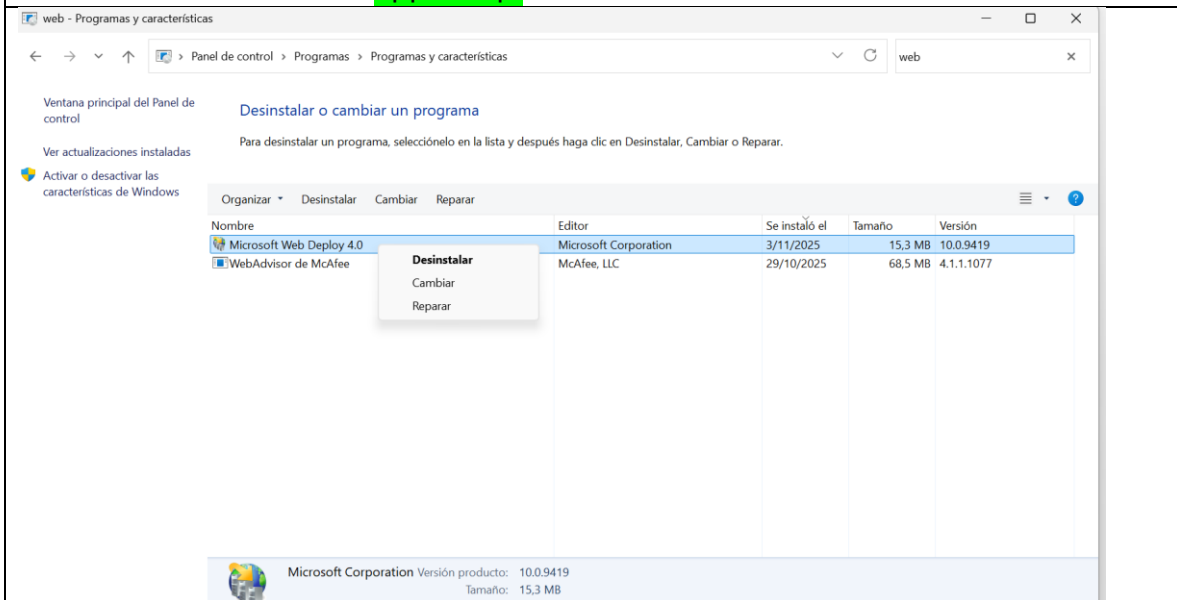

limpiar paths

```
$webDeployPath1 = "C:\Program Files\IIS\Microsoft Web Deploy V3"
```

```
$webDeployPath2 = "C:\Program Files (x86)\IIS\Microsoft Web Deploy V3"
```



```
$currentPath = [Environment]::GetEnvironmentVariable("Path", "Machine")
```

```
$newPath = $currentPath -replace [Regex]::Escape(";$webDeployPath1"), "" `
            -replace [Regex]::Escape(";$webDeployPath2"), ""
```

```
[Environment]::SetEnvironmentVariable("Path", $newPath, "Machine")
```

Write-Host "Ruta Web Deploy eliminada del PATH del sistema."

Instalar web deploy

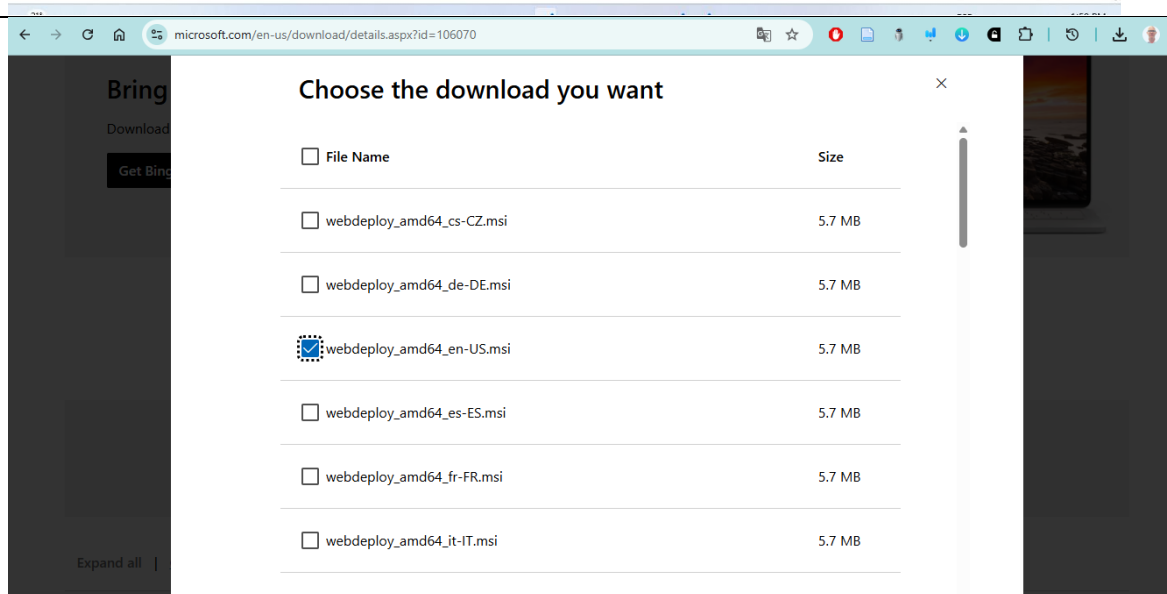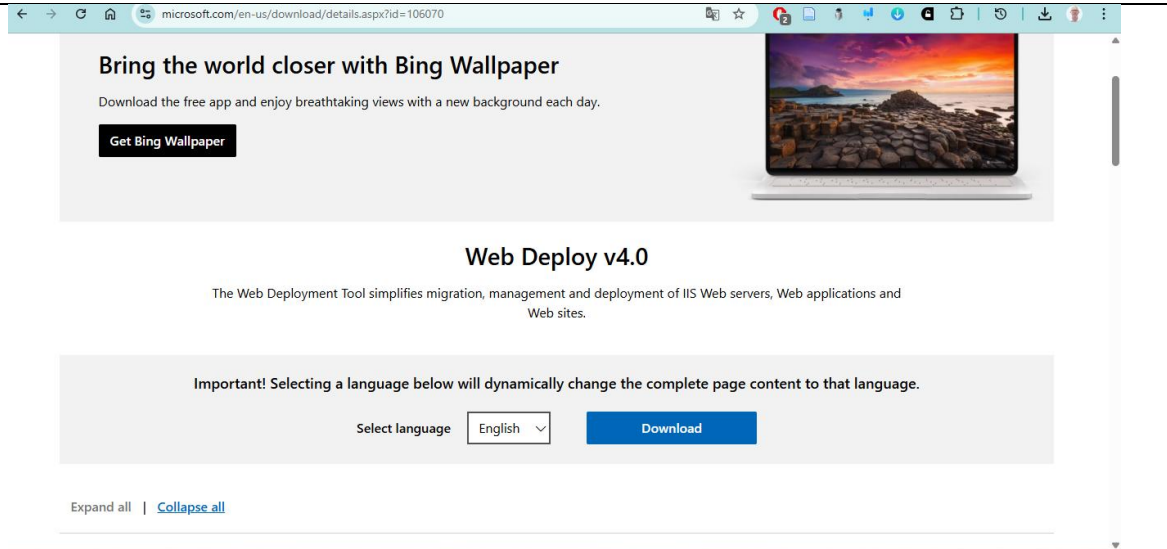

Agregar Web Deploy al PATH (solo si no está)


```
$webDeployPath = "C:\Program Files\IIS\Microsoft Web Deploy V3"
```

```
$currentPath = [Environment]::GetEnvironmentVariable("Path", "Machine")
```

```
if ($currentPath -notlike "*$webDeployPath*") {  
    [Environment]::SetEnvironmentVariable("Path", "$currentPath;$webDeployPath",  
    "Machine")  
}
```

```
$env:Path = [Environment]::GetEnvironmentVariable("Path", "Machine")
```

Debe **cerrar vscode** y **todas las instancias de power Shell** para verificar

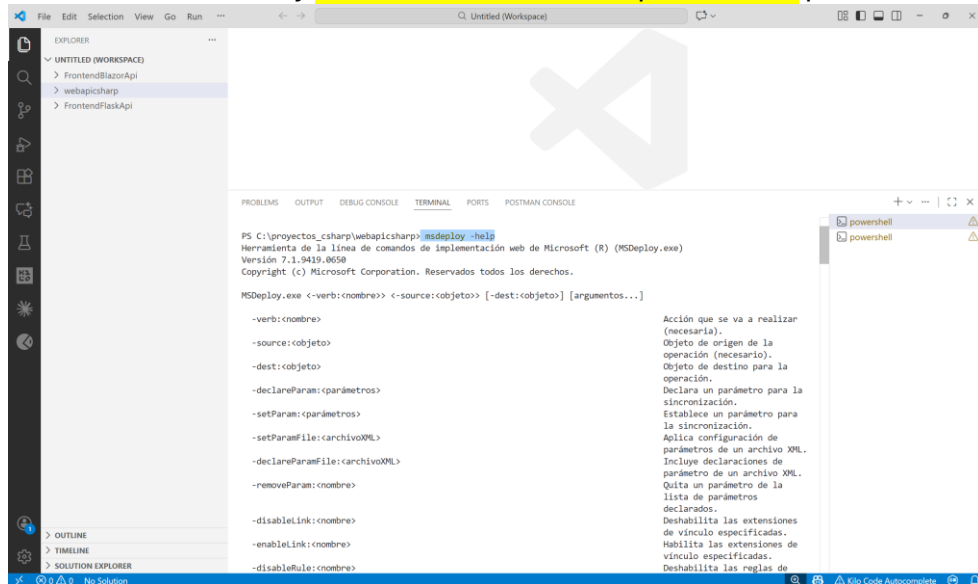

The screenshot shows the Visual Studio Code interface. The Explorer sidebar on the left shows a workspace with files: FrontendBlazorApi, webapicharp, and FrontendFlaskApi. The main editor area displays the output of the command `msdeploy -help` in the terminal. The output shows the version (7.1.9439.0650) and a list of command-line options with their descriptions. A PowerShell terminal window is also open in the background.

```
PS C:\proyectos_csharp\webapicharp> msdeploy -help
Herramienta de la línea de comandos de implementación web de Microsoft (R) (MSDeploy.exe)
Versión 7.1.9439.0650
Copyright (c) Microsoft Corporation. Reservados todos los derechos.

MSDeploy.exe <-verb:<nombre>> <-source:<objeto>> [-dest:<objeto>] [argumentos...]

-verb:<nombre>                Acción que se va a realizar (necesaria).
-source:<objeto>              Objeto de origen de la operación (necesario).
-dest:<objeto>                Objeto de destino para la operación.
-declareParam:<parámetros>   Declara un parámetro para la sincronización.
-setParam:<parámetros>       Establece un parámetro para la sincronización.
-setParamFile:<archivoXML>   Aplica configuración de parámetros de un archivo XML.
-declareParamFile:<archivoXML> Incluye declaraciones de parámetro de un archivo XML.
-removeParam:<nombre>        Quita un parámetro de la lista de parámetros declarados.
-disableLink:<nombre>         Deshabilita las extensiones de vínculo especificadas.
-enableLink:<nombre>          Habilita las extensiones de vínculo especificadas.
-disableRule:<nombre>        Deshabilita las reglas de
```

Verificación 1 — Probar si msdeploy aparece en el PATH

En PowerShell normal (no admin), escribe:

msdeploy -help

Si está instalado y accesible, debe mostrar la ayuda de Web Deploy.

Verificación 2 — Ubicar msdeploy.exe en el sistema

Ejecuta en PowerShell:

Get-Command msdeploy.exe

Si Web Deploy está correctamente instalado, devuelve una ruta como:

C:\Program Files\IIS\Microsoft Web Deploy V3\msdeploy.exe

Verificación 3 — Buscar manualmente msdeploy.exe donde debería estar

Ejecuta:

Test-Path "C:\Program Files\IIS\Microsoft Web Deploy V3\msdeploy.exe"

Si devuelve **True**, Web Deploy está instalado físicamente.

Habilitar Web Deploy Acces y abrir el archivo publihs profile para ver las credenciales

The screenshot shows the admin interface of csharpapigenerica.runasp.net. The left sidebar contains navigation links: Overview, Files, Domains, HTTPS, Deploy, Scripting, AppInstaller, Process, Tasks, Resource, Logs, and Upgrade. The main content area displays the configuration for site44023, which is currently 'Enabled'. It includes sections for FTP/SFTP Access, WebDeploy Access, and Github Deploy. The FTP/SFTP section shows details for site44023.siteasp.net, including ports 21 (FTP) and 22 (SFTP/SCP), login site44023, and website root wwwroot. The WebDeploy section shows details for site44023.siteasp.net, including port 8172, site site44023, login site44023, and password jp_5=d7TkF!6. A 'Download publish profile' button is visible in the WebDeploy section.

```

1  <?xml version="1.0" encoding="utf-8"?>
2  <publishData>
3    <publishProfile
4      profileName="site44023-WebDeploy"
5      publishMethod="MSDeploy"
6      publishUrl="site44023.siteasp.net"
7      msdeploySite="site44023"
8      userName="site44023"
9      userPWD="jp_5=d7TkF!6"
10     destinationAppUrl="http://csharpapigenerica.runasp.net/"
11   />
12 </publishData>
13

```

Crear la carpeta publicado

dotnet publish "RUTA_DEL_PROYECTO.csproj" -c CONFIGURACION -o "RUTA_CARPETA_SALIDA"

Explicación detallada:

dotnet publish

- Comando para compilar y preparar la aplicación para despliegue
- Genera todos los archivos necesarios (DLLs, configuración, dependencias)

"RUTA_DEL_PROYECTO.csproj"

- Ruta completa al archivo del proyecto (.csproj)
- Contiene la configuración del proyecto (dependencias, versión .NET, etc.)

-c CONFIGURACION

- -c = configuration (configuración)
- Opciones:
 - **Debug:** Para desarrollo, incluye símbolos de depuración
 - **Release:** Para producción, código optimizado sin debug
- Siempre usar **Release** para publicar en servidor

-o "RUTA_CARPETA_SALIDA"

- -o = output (salida)
- Carpeta donde se guardarán los archivos publicados
- Si la carpeta no existe, se crea automáticamente
- Si existe, se sobrescribe el contenido


Ejemplo con la API:

```
dotnet publish "C:\proyectos_csharp\webapicsharp\webapicsharp.csproj" -c Release -o "C:\proyectos_csharp\webapicsharp\publicado"
```

¿Qué hace este comando?

1. Lee el proyecto webapicsharp.csproj
2. Compila el código en modo **Release** (optimizado)
3. Copia todas las DLLs de dependencias (NuGet packages)
4. Genera el archivo web.config para IIS
5. Copia archivos de configuración (appsettings.json)
6. Guarda todo en la carpeta publicado

Resultado: Una carpeta publicado lista para subir al servidor con msdeploy.

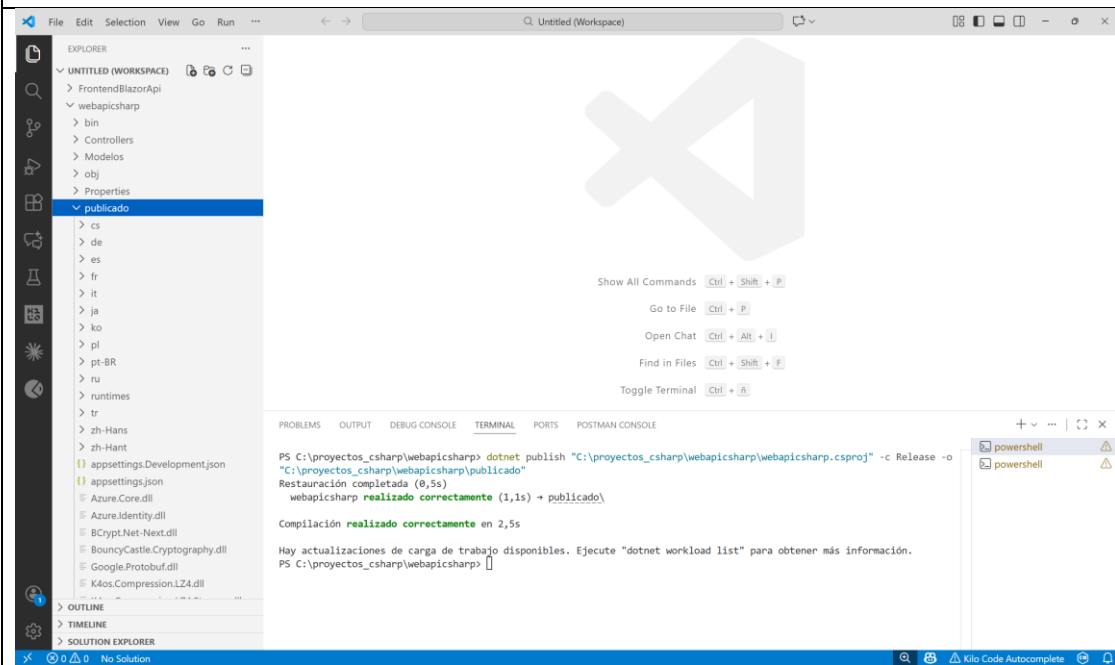

Desplegar la aplicación en el sitio WEB

```
msdeploy -verb:sync -source:contentPath="RUTA_LOCAL_CARPETA_PUBLICADO" -dest:contentPath="NOMBRE_SITIO",computerName="https://NOMBRE_SITIO.siteasp.net:8172/MsDeploy.axd?site=NOMBRE_SITIO",userName="NOMBRE_SITIO",password='CONTRASEÑA',authType="Basic" -allowUntrusted
```

Desglose:

msdeploy

- Herramienta de Microsoft para desplegar aplicaciones web

-verb:sync

- **sync** = sincronizar
- Copia/actualiza archivos del origen al destino
- Sobrescribe archivos existentes, agrega nuevos, elimina obsoletos

-source:contentPath="RUTA_LOCAL_CARPETA_PUBLICADO"

- **source** = origen (tu computadora)
- **contentPath** = ruta de la carpeta que quieres subir
- Ejemplo: "C:\proyectos_csharp\webapicsharp\publicado"

-dest:contentPath="NOMBRE_SITIO"

- **dest** = destino (servidor)
- **contentPath** = nombre del sitio en el servidor
- Ejemplo: "site44023"

,computerName="https://NOMBRE_SITIO.siteasp.net:8172/MsDeploy.axd?site=NOMBRE_SITIO"

- **computerName** = dirección del servidor
- **:8172** = puerto de despliegue
- **MsDeploy.axd** = servicio de Web Deploy
- Ejemplo: "https://site44023.siteasp.net:8172/MsDeploy.axd?site=site44023"

,userName="NOMBRE_SITIO"

- **userName** = usuario para autenticarse
- Generalmente es el mismo nombre del sitio
- Ejemplo: "site44023"

,password='CONTRASEÑA'

- **password** = contraseña del sitio
- Usar comillas simples '.' para evitar problemas con caracteres especiales
- Ejemplo: 'j?8J6tL%-P5w'

,authType="Basic"

- **authType** = tipo de autenticación
- **Basic** = autenticación básica HTTP

-allowUntrusted

- Permite certificados SSL no confiables
- Necesario porque MonsterASP usa certificados autofirmados
- Sin esto, el comando fallaría por error de certificado

Ejemplo de archivo .publishSettings

```
<?xml version="1.0" encoding="utf-8"?>
<publishData>
  <publishProfile
    profileName="site44041-WebDeploy"
    publishMethod="MSDeploy"
    publishUrl="site44041.siteasp.net"
    msdeploySite="site44041"
    userName="site44041"
    userPWD="Rd2!+Mf4Fh6@"
    destinationAppUrl="http://apicarloscastro.runasp.net/"
  />
</publishData>
```

Publicar con

msdeploy -verb:sync -

source:contentPath="C:\proyectos_csharp\webapicsharp\publicado" -

dest:contentPath="site44041",computerName="https://site44041.siteasp.net:8172 /MsDeploy.axd?site=site44041",userName="site44041",password='Rd2!+Mf4Fh6@',authType="Basic" -allowUntrusted


Datos extraídos del XML:

- **msdeploySite:** site44041 → nombre del sitio
- **userName:** site44041 → usuario
- **userPWD:** Rd2!+Mf4Fh6@ → contraseña
- **publishUrl:** site44041.siteasp.net → servidor
- **destinationAppUrl:** http://apicarloscastro.runasp.net/ → URL pública

The image displays two screenshots of the Visual Studio IDE. The top screenshot shows the command prompt running the `msdeploy` command with various parameters, including the destination path, computer name, user name, password, and authentication type. The bottom screenshot shows the output of the command, which lists the files and directories being added to the deployment package, such as `site44041\cs`, `site44041\de`, `site44041\fr`, `site44041\it`, `site44041\ja`, `site44041\ko`, `site44041\pt-BR`, `site44041\ru`, `site44041\runtimes`, `site44041\runtimes\linux`, `site44041\runtimes\linux\lib`, `site44041\runtimes\linux\lib\net6.0`, `site44041\runtimes\linux\lib\net6.0`, `site44041\runtimes\linux\lib\net9.0`, `site44041\runtimes\win`, `site44041\runtimes\win\lib`, `site44041\runtimes\win\lib\net6.0`, `site44041\runtimes\win\lib\net8.0`, `site44041\runtimes\win\lib\net9.0`, `site44041\runtimes\win\arm64`, `site44041\runtimes\win-arm64(native)`, and `site44041\runtimes\win-x64`. The output also includes the total number of changes: 124 (123 agregados, 1 eliminados, 0 actualizados, 0 parámetros cambiados, 33994389 bytes copiado).

Verificar: Abrir: <http://SITIOWEB.runasp.net/swagger>

Y <http://SITIOWEB.runasp.net>

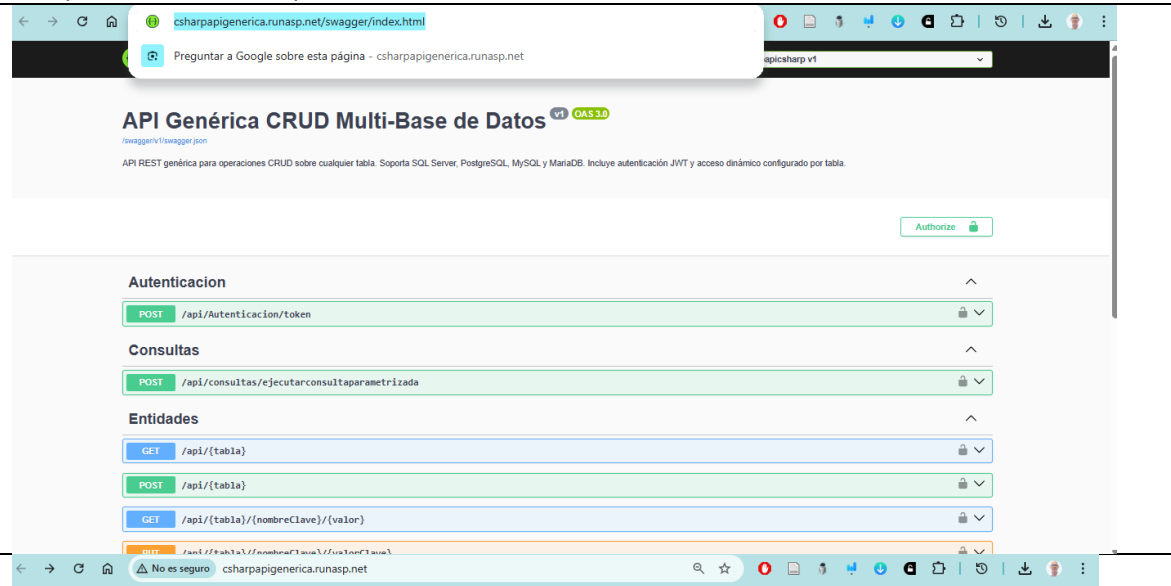

Your website is ready...

Congratulations, your new website is ready to use and you can upload your content.

[HELP: How to deploy your application to website?](#)

— MonsterASP.NET team

Entrar a la base de datos y copiar la cadena de conexión

The screenshot shows the MonsterASP.net interface for a database named 'db33010'. The 'Overview' section displays database settings: ID 'db33010', Status 'Available', Name 'db33010.databaseasp.net', Type 'Microsoft SQL Server', Plan 'FreeDatabase', Subscription 'Free', Server 'db33010.databaseasp.net', Collation 'SQL_Latin1_General_CP1_CI_AS', Compatibility 'SqlServer2022', and Quota usage '8 MB' out of '1024 MB'. The 'Local access [Websites]' section shows login details: Server/Hostname 'db33010.databaseasp.net', Port '1433', Login 'db33010', and Password 'Yt9@8!nBE5#m'. A 'Connection string' is provided: 'Server=db33010.databaseasp.net;Database=db33010;User Id=db33010;Password=Yt9@8!nBE5#m;Encrypt=False;MultipleActiveResultSets=True'.


Actualizar appsettings.json

Abre el archivo en tu carpeta publicada:

C:\proyectos_csharp\webapicsharp\publicado\appsettings.json

Y actualiza la sección de ConnectionStrings con la cadena que te dio MonsterASP:

```
{
  "Jwt": {
    "Key": "MySuperSecretKey1234567890!@#$%^&*()_+",
    "Issuer": "MyApp",
    "Audience": "MyAppUsers",
    "DuracionMinutos": 60
  },
  "TablasProhibidas": [],
  "ConnectionStrings": {
    "SqlServer": "Server=db33010.databaseasp.net;Database=db33010;User Id=db33010;Password=Yt9@8!nBE5#m;Encrypt=False;MultipleActiveResultSets=True;TrustServerCertificate=True;"
  },
  "DatabaseProvider": "SqlServer",
  "Logging": {
    "LogLevel": {
      "Default": "Information",
      "Microsoft.AspNetCore": "Warning"
    }
  },
  "AllowedHosts": "*"
}
```

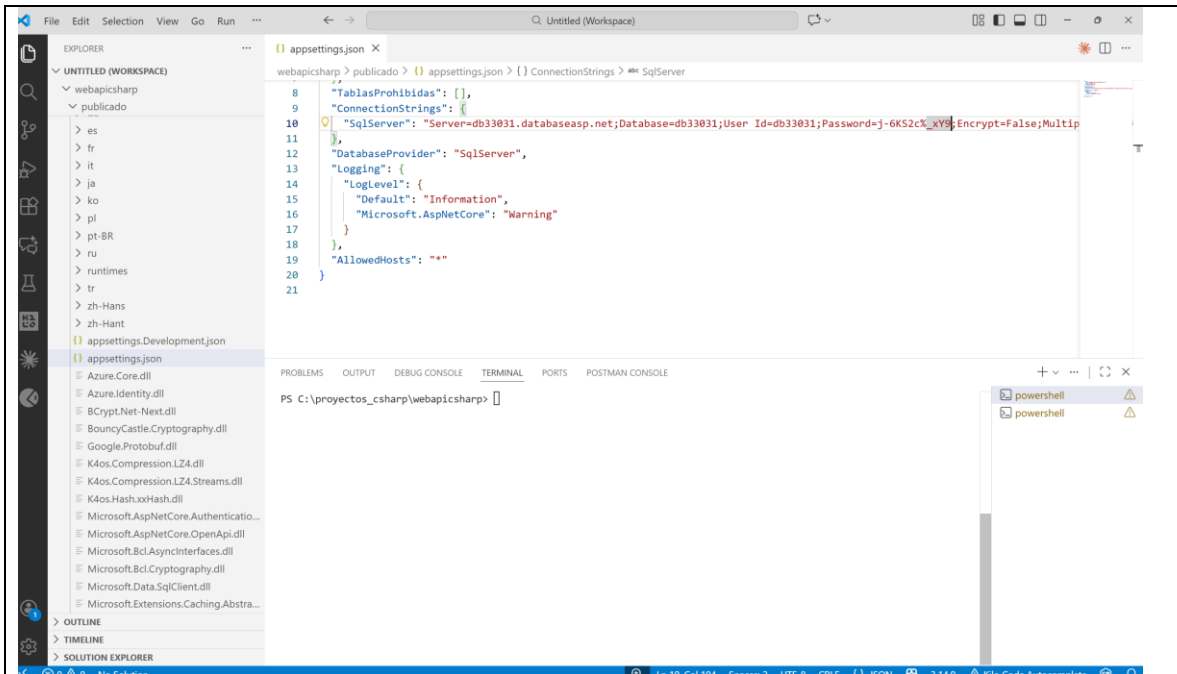


Volver a publicar

msdeploy -verb:sync -

source:contentPath="C:\proyectos_csharp\webapicsharp\publicado" -

dest:contentPath="site44041",computerName="https://site44041.siteasp.net:8172
/MsDeploy.axd?site=site44041",userName="site44041",password='Rd2!+Mf4Fh6@',
authType="Basic" -allowUntrusted

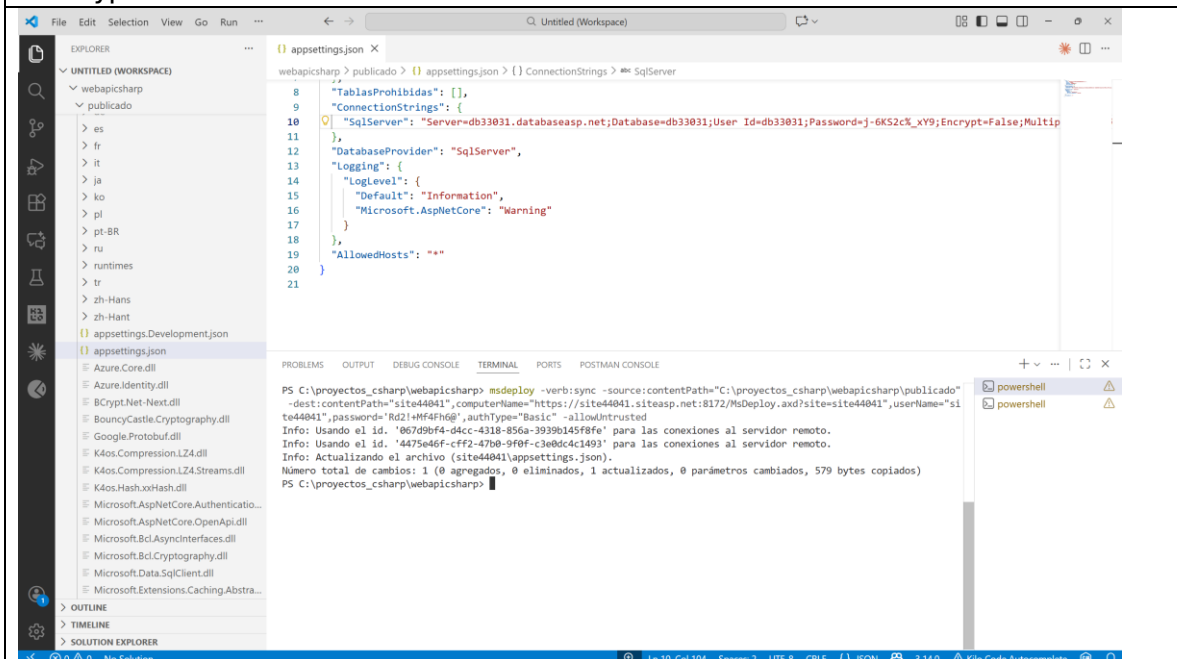

Necesita reiniciar la aplicación para que lea el nuevo appsettings.json.

En MonsterASP:

1. Ve al sitio SITIOWEB.runasp.net/swagger

2. Busca el botón **"Restart"** (generalmente está en "Quick actions" en la parte inferior derecha)
3. Haz clic en **Restart**
4. Espera 10-15 segundos

Luego prueba de nuevo:

<http://SITIOWEB.runasp.net>

The image shows two screenshots. The top screenshot is the MonsterASP.net control panel for the website 'apicarloscastro.runasp.net'. It displays site details, access information, and quick actions. The bottom screenshot is a web browser showing a REST API response for 'csharpapigenerica.runasp.net'.

MonsterASP.net Control Panel:

- Overview:** Site ID: site44041, Status: Enabled, Name: apicarloscastro.runasp.net, Plan: FreePlan, Server: site44041.siteasp.net, .NET: .NET 10.x/9.x/8.x/7.x/6.x/5.x/Core [x64], PHP: -- [NONE], Memory limit: 256 MB RAM, File count: 0, Quota usage: 0 MB / 5120 MB.
- Access to website:** FTP and SFTP login details. Server: site44041.siteasp.net, Port: 21 (FTP), 22 (SFTP/SCP), Login: site44041, Password: [REDACTED], Website Root: /wwwroot, WebFTP: https://webftp.monsterasp.net.
- Quick actions:** Restart, Stop.
- Quick statistics:** Site uptime: 1h, AppPool uptime: 1h, Recycled: 0, Crash: 2.

Web Browser (csharpapigenerica.runasp.net):

```

{
  "mensaje": "Bienvenido a la API Genérica en C#",
  "version": "1.0",
  "descripcion": "API genérica para operaciones CRUD sobre cualquier tabla de base de datos",
  "documentacion": "Para más detalles, visita /swagger",
  "fechaServidor": "2025-11-20T21:18:33.9533178Z",
  "enlaces": {
    "swagger": "/swagger",
    "info": "/api/info",
    "ejemploTabla": "/api/MiTabla"
  },
  "uso": {
    "GET /api/{tabla} - Lista registros de una tabla",
    "GET /api/{tabla}?limite=50 - Lista con límite específico",
    "GET /api/{tabla}?esquema=dbo - Lista con esquema específico"
  }
}
```

```
← → ↻ 🏠 🔒 No es seguro csharpapigenerica.runasp.net/api/usuario 🔍 ☆ 📄 🗑️ 🔄

ar formato al texto ☒

{
  "tabla": "usuario",
  "esquema": "por defecto",
  "limite": null,
  "total": 4,
  "datos": [
    {
      "email": "admin@correo.com",
      "contrasena": "admin123"
    },
    {
      "email": "cliente1@correo.com",
      "contrasena": "cli123"
    },
    {
      "email": "jefe@correo.com",
      "contrasena": "jefe123"
    },
    {
      "email": "vendedor1@correo.com",
      "contrasena": "vend123"
    }
  ]
}
```

Publicar Front End

PASO 1: Buscar dónde está configurada la URL de la API

Ejecuta:

```
Get-Content "C:\proyectos_csharp\FrontendBlazorApi\Program.cs"
```

Abre el archivo:

```
C:\proyectos_csharp\FrontendBlazorApi\Program.cs
```

Comentar y agregar nueva línea

```
// cliente.BaseAddress = new Uri("http://localhost:5031/"); ← Vieja comentada
cliente.BaseAddress = new Uri("http://csharpapigenerica.runasp.net/"); ← Nueva activa
```

PASO 2: Publicar el frontend

Ejecuta:

```
dotnet publish "C:\proyectos_csharp\FrontendBlazorApi\FrontendBlazorApi.csproj"
-c Release -o "C:\proyectos_csharp\FrontendBlazorApi\publicado"
```

PASO 3: Crear sitio para el frontend en MonsterASP

Ve a MonsterASP:

1. **Websites** → **Cloud websites** → **Add Website**
2. Selecciona **FREE**

3. Escribe un subdominio para tu frontend (ejemplo: blazorfrontend)
4. Crea el sitio

admin.monsterasp.net/app/site/add/step2

MonsterASP.net ASP.NET & .NET Cloud Hosting

Create new service Tasks Messages Carlos Arturo Castro Castro carlosarturo.castrocastro@gmail.com Log out

Websites

Dashboard Account overview

Websites Cloud websites

Add website Create new

Databases Cloud databases

E-mails Cloud mails

DNS DNS management

Tickets Support tickets

Subscriptions Packages

Billing Billing management

Customer Account management

Create website Here you can create new website

Plan Hosting plan 2 Domain Domain and type 3 DNS Domain pointing 4 Subscription Package 5 Location Datacenter

FREE Subdomain Website on our Free subdomain

Your Domain Website on your own domain

Your Subdomain Website on your own subdomain

Subdomain name frontendblazor Free domain .runasp.net

Example: mypersonalsite

Min. 3 characters. Allowed letters [a-z], numbers [0-9] and dash [-].

INFO Your website will be created and available instantly on our Free subdomain.

TIP With Premium plan you can connect your own custom domain or subdomain e.g. yourdomain.com

Summary Your selected options

Hosting plan Free plan

Domain ---

Domain type ---

Subscription ---

Datacenter ---

Continue

Back

Close

admin.monsterasp.net/app/site

MonsterASP.net ASP.NET & .NET Cloud Hosting

Create new service Tasks Messages Carlos Arturo Castro Castro carlosarturo.castrocastro@gmail.com Log out

Websites

Cloud websites

Add Website

Search

Search...

Records 15

Status	Name	Domain aliases	Subscription	Plan	Region	Server	Memory	Disk size
Enabled	frontendblazor.runasp.net Free plan site44029	0 [---]	Free	Free	EU	site44029.siteasp.net Always use this server name.	256 MB	0% 5120 MB
Enabled	churpapi.gemericu.runasp.net Free plan site44023	0 [---]	Free	Free	EU	site44023.siteasp.net Always use this server name.	256 MB	0% 5120 MB

PASO 4: Obtener credenciales de despliegue

Haz clic en "manage" del sitio frontendblazor.runasp.net y busca la información de despliegue (similar a como lo hiciste con la API).

Toma captura de:

- Nombre del sitio (probablemente site44027)
- Usuario
- Contraseña
- URL de despliegue

admin.monsterasp.net/app/site/info?site=site44029

MonsterASP.net
ASP.NET & .NET Cloud Hosting

Create new service Tasks Messages Carlos Arturo Castro Castro carlosarturo.castrocastro@gmail.com Log out

/ Websites / frontendblazor.runasp.net [frontendblazor.runasp.net]

frontendlazor.runasp.net
Website details frontendblazor.runasp.net Show Website

Overview
Site settings and details

ID site44029
Status Enabled
Domain frontendblazor.runasp.net
Name frontendblazor.runasp.net
Plan FreePlan
Subscription
Server site44029.siteasp.net
NET .NET 10.x/9.x/8.x/7.x/6.x/5.x/Core [x86]
PHP [NONE]
Memory limit 256 MB RAM
File count 10000x
Quota usage 0 MB
Disk quota 0 MB / 5120 MB

Access to website
FTP and SFTP login details

Server / Hostname site44029.siteasp.net
Port 21 (FTP)
22 (SFTP/SCP)
Login site44029
Password rGX5@ocKM3*X
Website Root /wwwroot
WebFTP https://webftp.monsterasp.net

Your website is ready...

DNS status
Current DNS pointing status

Domain frontendblazor.runasp.net
Type Free subdomain
NS server Our server [NS]
Web server Our server [A]
Status Domain frontendblazor.runasp.net pointing correctly to our web server 178.63.129.215

Quick actions
Restart Stop

PASO 5: Desplegar el frontend con msdeploy

Ejecuta:

Nombre del sitio: site44029

Usuario: site44029

Contraseña: rGX5@ocKM3*X!

```
msdeploy -verb:sync -
source:contentPath="C:\proyectos_csharp\FrontendBlazorApi\publicado" -
dest:contentPath="site44029",computerName="https://site44029.siteasp.net:8172
/MsDeploy.axd?site=site44029",userName="site44029",password='rGX5@ocKM3*X
!',authType="Basic" -allowUntrusted
```

Activar web deploy

admin.monsterasp.net/app/site/site/deploy?site=site44029

MonsterASP.net
ASP.NET & .NET Cloud Hosting

Create new service Tasks Messages Carlos Arturo Castro Castro carlosarturo.castrocastro@gmail.com Log out

/ Websites / frontendblazor.runasp.net [frontendblazor.runasp.net]

frontendlazor.runasp.net
FTP/SFTP/WebDeploy access frontendblazor.runasp.net Add FTP account

Search

Status Login Path Password Permission Last login

Enabled site44029 \

FTP/SFTP Access
FTP and SFTP login details

FTP Server site44029.siteasp.net
Port 21 (FTP)
22 (SFTP/SCP)
Login site44029
Password rGX5@ocKM3*X
Website Root /wwwroot
WebFTP https://webftp.monsterasp.net

WebDeploy Access
Visual Studio login details

Enabled Disabled

Server site44029.siteasp.net
Port 8172
Site site44029
Login site44029
Password J_k91SHd8gY

Download publish profile

WebDeploy is best way to deploy your applications directly from Visual Studio. Simply download publish profile and import it into your project in Visual Studio to get started.

How to publish website using WebDeploy from Visual Studio?

GitHub Deploy
Deploy from remote Github repository

```
chivo  Editar  Buscar  Vista  Codificación  Lenguaje  Configuración  Herramientas  Macro  Ejecutar  Complementos  Pestañas  ?
csharpapigenerica.runasp.net-WebDeploy.publishSettings  frontendblazor.runasp.net-WebDeploy.publishSettings
1  <?xml version="1.0" encoding="utf-8"?>
2  <publishData>
3    <publishProfile
4      profileName="site44029-WebDeploy"
5      publishMethod="MSDeploy"
6      publishUrl="site44029.siteasp.net"
7      msdeploySite="site44029"
8      userName="site44029"
9      userPWD="J_k9!5Hd8g%Y"
10     destinationAppUrl="http://frontendblazor.runasp.net/"
11   />
12 </publishData>
13
```

msdeploy -verb:sync -
source:contentPath="C:\proyectos_csharp\FrontendBlazorApi\publicado" -
dest:contentPath="site44029",computerName="https://site44029.siteasp.net:8172
/MsDeploy.axd?site=site44029",userName="site44029",password='J_k9!5Hd8g%Y',
authType="Basic" -allowUntrusted

Probar con

<http://frontendblazor.runasp.net/>

