

visualizations

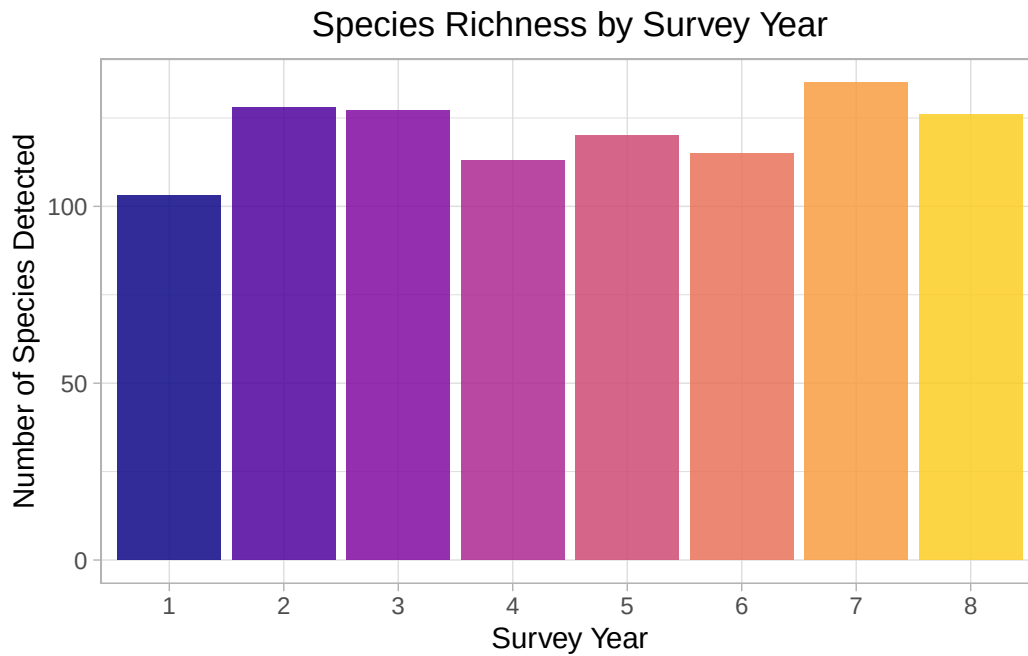


Figure 1: Species richness per survey year at NCOS. The lowest richness occurs at survey year 1 with the rest appearing more similar.

``summarise()`` has grouped output by 'survey_year'. You can override using the ``.groups`` argument.

Warning: Removed 1 row containing missing values or values outside the scale range (``geom_segment()``).

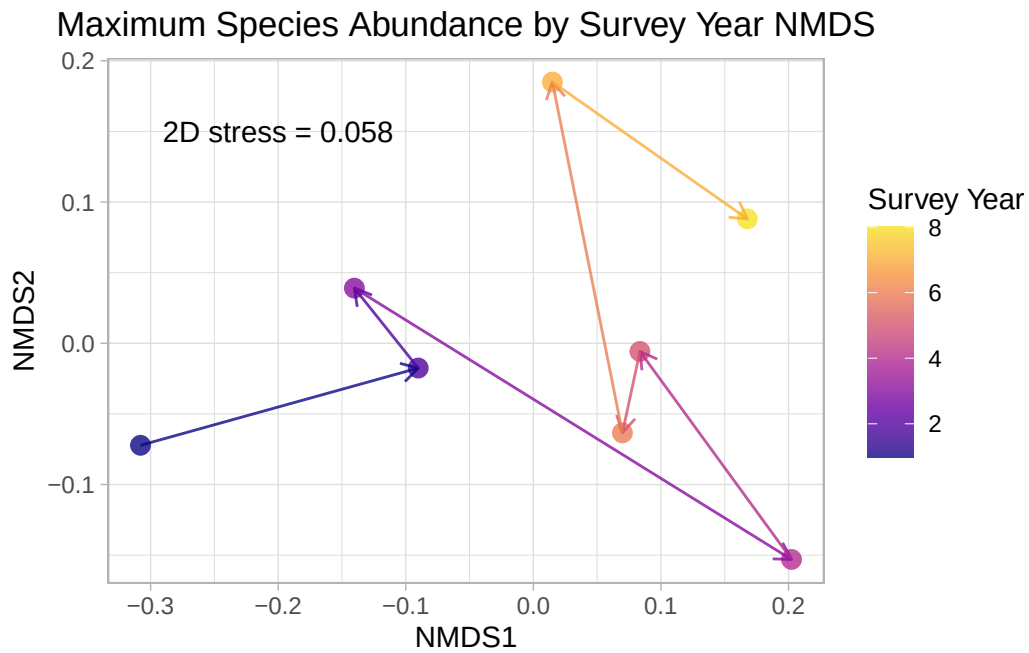


Figure 2: Replication of the ‘Maximum Species Abundance’ NMDS. I reproduced it thinking that with cleaner data it might appear differently, giving insight into species identity similarities or differences, following the bar chart of species richness. The usage of `setdiff()` may be more desirable in this situation. I became unsure of the application of `setdiff()` you (Francis) wrote on the sticky note and would love to revisit it.