

The Comprehensive L^AT_EX Symbol List

Scott Pakin <pakin@uiuc.edu>*

18 September 2003

Abstract

This document lists 2826 symbols and the corresponding L^AT_EX commands that produce them. Some of these symbols are guaranteed to be available in every L^AT_EX 2_ε system; others require fonts and packages that may not accompany a given distribution and that therefore need to be installed. All of the fonts and packages used to prepare this document—as well as this document itself—are freely available from the Comprehensive T_EX Archive Network (<http://www.ctan.org>).

Contents

1	Introduction	6
1.1	Document Usage	6
1.2	Frequently Requested Symbols	6
2	Body-text symbols	7
Table 1:	L ^A T _E X 2 _ε Escapable “Special” Characters	7
Table 2:	L ^A T _E X 2 _ε Commands Defined to Work in Both Math and Text Mode	7
Table 3:	Predefined L ^A T _E X 2 _ε Text-mode Commands	7
Table 4:	Non-ASCII Letters (Excluding Accented Letters)	8
Table 5:	Letters Used to Typeset African Languages	8
Table 6:	Punctuation Marks Not Found in OT1	8
Table 7:	pifont Decorative Punctuation Marks	8
Table 8:	wasysym Phonetic Symbols	8
Table 9:	tipa Phonetic Symbols	9
Table 10:	wsuipa Phonetic Symbols	10
Table 11:	phonetic Phonetic Symbols	11
Table 12:	Text-mode Accents	11
Table 13:	tipa Text-mode Accents	11
Table 14:	wsuipa Text-mode Accents	13
Table 15:	phonetic Text-mode Accents	13
Table 16:	wsuipa Diacritics	13
Table 17:	textcomp Diacritics	14
Table 18:	textcomp Currency Symbols	14
Table 19:	marvosym Currency Symbols	14
Table 20:	wasysym Currency Symbols	14
Table 21:	eurosym Euro Signs	14
Table 22:	textcomp Legal Symbols	15
Table 23:	textcomp Old-style Numerals	15
Table 24:	Miscellaneous textcomp Symbols	15
Table 25:	Miscellaneous wasysym Text-mode Symbols	15
Table 26:	AMS Commands Defined to Work in Both Math and Text Mode	16

*The original version of this document was written by David Carlisle, with several additional tables provided by Alexander Holt. See Section 7.6 on page 73 for more information about who did what.

3	Mathematical symbols	17
Table 27:	Binary Operators	17
Table 28:	\mathcal{AMS} Binary Operators	17
Table 29:	stmaryrd Binary Operators	18
Table 30:	wasysym Binary Operators	18
Table 31:	txfonts/pxfonts Binary Operators	18
Table 32:	mathabx Binary Operators	19
Table 33:	ulsy Geometric Binary Operators	19
Table 34:	mathabx Geometric Binary Operators	19
Table 35:	Variable-sized Math Operators	20
Table 36:	\mathcal{AMS} Variable-sized Math Operators	20
Table 37:	stmaryrd Variable-sized Math Operators	20
Table 38:	wasysym Variable-sized Math Operators	20
Table 39:	mathabx Variable-sized Math Operators	21
Table 40:	txfonts/pxfonts Variable-sized Math Operators	22
Table 41:	esint Variable-sized Math Operators	22
Table 42:	Binary Relations	23
Table 43:	\mathcal{AMS} Binary Relations	23
Table 44:	\mathcal{AMS} Negated Binary Relations	23
Table 45:	stmaryrd Binary Relations	23
Table 46:	wasysym Binary Relations	23
Table 47:	txfonts/pxfonts Binary Relations	24
Table 48:	txfonts/pxfonts Negated Binary Relations	24
Table 49:	mathabx Binary Relations	24
Table 50:	mathabx Negated Binary Relations	25
Table 51:	trsym Binary Relations	25
Table 52:	trfsigns Binary Relations	25
Table 53:	Subset and Superset Relations	25
Table 54:	\mathcal{AMS} Subset and Superset Relations	26
Table 55:	stmaryrd Subset and Superset Relations	26
Table 56:	wasysym Subset and Superset Relations	26
Table 57:	txfonts/pxfonts Subset and Superset Relations	26
Table 58:	mathabx Subset and Superset Relations	26
Table 59:	Inequalities	26
Table 60:	\mathcal{AMS} Inequalities	27
Table 61:	wasysym Inequalities	27
Table 62:	txfonts/pxfonts Inequalities	27
Table 63:	mathabx Inequalities	27
Table 64:	\mathcal{AMS} Triangle Relations	28
Table 65:	stmaryrd Triangle Relations	28
Table 66:	mathabx Triangle Relations	28
Table 67:	Arrows	28
Table 68:	Harpoons	28
Table 69:	textcomp Text-mode Arrows	28
Table 70:	\mathcal{AMS} Arrows	29
Table 71:	\mathcal{AMS} Negated Arrows	29
Table 72:	\mathcal{AMS} Harpoons	29
Table 73:	stmaryrd Arrows	29
Table 74:	txfonts/pxfonts Arrows	29
Table 75:	mathabx Arrows	30
Table 76:	mathabx Negated Arrows	30
Table 77:	mathabx Harpoons	30
Table 78:	chemarrow Arrows	30
Table 79:	ulsy Contradiction Symbols	30

Table 80:	Extension Characters	30
Table 81:	stmaryrd Extension Characters	31
Table 82:	txfonts/pxfonts Extension Characters	31
Table 83:	mathabx Extension Characters	31
Table 84:	Log-like Symbols	31
Table 85:	\mathcal{AMS} Log-like Symbols	31
Table 86:	Greek Letters	32
Table 87:	\mathcal{AMS} Greek Letters	32
Table 88:	txfonts/pxfonts Upright Greek Letters	32
Table 89:	upgreek Upright Greek Letters	33
Table 90:	txfonts/pxfonts Variant Latin Letters	33
Table 91:	\mathcal{AMS} Hebrew Letters	33
Table 92:	Letter-like Symbols	33
Table 93:	\mathcal{AMS} Letter-like Symbols	33
Table 94:	txfonts/pxfonts Letter-like Symbols	34
Table 95:	mathabx Letter-like Symbols	34
Table 96:	trfsigns Letter-like Symbols	34
Table 97:	\mathcal{AMS} Delimiters	34
Table 98:	stmaryrd Delimiters	34
Table 99:	mathabx Delimiters	34
Table 100:	nath Delimiters	34
Table 101:	Variable-sized Delimiters	35
Table 102:	Large, Variable-sized Delimiters	35
Table 103:	Variable-sized stmaryrd Delimiters	35
Table 104:	mathabx Variable-sized Delimiters	35
Table 105:	nath Variable-sized Delimiters (Double)	36
Table 106:	nath Variable-sized Delimiters (Triple)	36
Table 107:	textcomp Text-mode Delimiters	36
Table 108:	Math-mode Accents	37
Table 109:	\mathcal{AMS} Math-mode Accents	37
Table 110:	yhmath Math-mode Accents	37
Table 111:	trfsigns Math-mode Accents	37
Table 112:	Extensible Accents	38
Table 113:	overrightarrow Extensible Accents	38
Table 114:	yhmath Extensible Accents	38
Table 115:	\mathcal{AMS} Extensible Accents	39
Table 116:	chemarr Extensible Accents	39
Table 117:	chemarrow Extensible Accents	39
Table 118:	mathabx Extensible Accents	40
Table 119:	esvect Extensible Accents	40
Table 120:	undertilde Extensible Accents	40
Table 121:	Dots	41
Table 122:	\mathcal{AMS} Dots	41
Table 123:	mathdots Dots	41
Table 124:	yhmath Dots	41
Table 125:	Miscellaneous $\text{\LaTeX 2}_{\epsilon}$ Symbols	42
Table 126:	Miscellaneous \mathcal{AMS} Symbols	42
Table 127:	Miscellaneous wasysym Symbols	42
Table 128:	Miscellaneous txfonts/pxfonts Symbols	42
Table 129:	Miscellaneous mathabx Symbols	42
Table 130:	Miscellaneous textcomp Text-mode Math Symbols	43
Table 131:	mathcomp Math Symbols	43
Table 132:	gensymb Symbols Defined to Work in Both Math and Text Mode	43
Table 133:	mathabx Mayan Digits	43

Table 134:	marvosym Math Symbols	43
Table 135:	Math Alphabets	44
4	Science and technology symbols	45
Table 136:	wasysym Electrical and Physical Symbols	45
Table 137:	ifsym Pulse Diagram Symbols	45
Table 138:	ar Aspect Ratio Symbol	45
Table 139:	textcomp Text-mode Science and Engineering Symbols	45
Table 140:	wasysym Astronomical Symbols	45
Table 141:	marvosym Astronomical Symbols	46
Table 142:	mathabx Astronomical Symbols	46
Table 143:	wasysym Astrological Symbols	46
Table 144:	marvosym Astrological Symbols	46
Table 145:	mathabx Astrological Symbols	46
Table 146:	wasysym APL Symbols	46
Table 147:	wasysym APL Modifiers	47
Table 148:	marvosym Computer Hardware Symbols	47
Table 149:	ascii Control Characters (IBM)	47
Table 150:	marvosym Communication Symbols	47
Table 151:	marvosym Engineering Symbols	47
Table 152:	wasysym Biological Symbols	47
Table 153:	marvosym Biological Symbols	48
Table 154:	marvosym Safety-related Symbols	48
5	Dingbats	49
Table 155:	bbding Arrows	49
Table 156:	pifont Arrows	49
Table 157:	marvosym Scissors	49
Table 158:	bbding Scissors	49
Table 159:	pifont Scissors	49
Table 160:	dingbat Pencils	50
Table 161:	bbding Pencils and Nibs	50
Table 162:	pifont Pencils and Nibs	50
Table 163:	dingbat Hands	50
Table 164:	bbding Hands	50
Table 165:	pifont Hands	50
Table 166:	bbding Crosses and Plusses	50
Table 167:	pifont Crosses and Plusses	51
Table 168:	bbding Xs and Check Marks	51
Table 169:	pifont Xs and Check Marks	51
Table 170:	wasysym Xs and Check Marks	51
Table 171:	pifont Circled Numbers	51
Table 172:	wasysym Stars	51
Table 173:	bbding Stars, Flowers, and Similar Shapes	52
Table 174:	pifont Stars, Flowers, and Similar Shapes	52
Table 175:	wasysym Geometric Shapes	52
Table 176:	ifsym Geometric Shapes	53
Table 177:	bbding Geometric Shapes	53
Table 178:	pifont Geometric Shapes	54
Table 179:	universa Geometric Shapes	54
Table 180:	manfnt Dangerous Bend Symbols	54
Table 181:	skull Symbols	54
Table 182:	Non-Mathematical mathabx Symbols	54
Table 183:	marvosym Information Symbols	54

Table 184: Miscellaneous dingbat Dingbats	54
Table 185: Miscellaneous bbding Dingbats	55
Table 186: Miscellaneous pifont Dingbats	55
6 Other symbols	56
Table 187: textcomp Genealogical Symbols	56
Table 188: wasysym General Symbols	56
Table 189: wasysym Musical Notes	56
Table 190: wasysym Circles	56
Table 191: Miscellaneous manfnt Symbols	56
Table 192: marvosym Navigation Symbols	57
Table 193: marvosym Laundry Symbols	57
Table 194: Other marvosym Symbols	57
Table 195: Miscellaneous universa Symbols	57
Table 196: ifsym Weather Symbols	58
Table 197: ifsym Alpine Symbols	58
Table 198: ifsym Clocks	58
Table 199: Other ifsym Symbols	59
Table 200: skak Chess Informator Symbols	59
7 Additional Information	60
7.1 Symbol Name Clashes	60
7.2 Where can I find the symbol for ... ?	60
7.3 Math-mode spacing	70
7.4 Bold mathematical symbols	71
7.5 ASCII and Latin 1 quick reference	71
7.6 About this document	73
References	75
Index	77

1 Introduction

Welcome to the Comprehensive L^AT_EX Symbol List! This document strives to be your primary source of L^AT_EX symbol information: font samples, L^AT_EX commands, packages, usage details, caveats—everything needed to put thousands of different symbols at your disposal. All of the fonts covered herein meet the following criteria:

1. They are freely available from the Comprehensive T_EX Archive Network (<http://www.ctan.org>).
2. All of their symbols have L^AT_EX 2_ε bindings. That is, a user should be able to access a symbol by name, not just by `\char⟨number⟩`.

These are not particularly limiting criteria; the Comprehensive L^AT_EX Symbol List contains samples of 2826 symbols—quite a large number. Some of these symbols are guaranteed to be available in every L^AT_EX 2_ε system; others require fonts and packages that may not accompany a given distribution and that therefore need to be installed. See <http://www.tex.ac.uk/cgi-bin/texfaq2html?label=instpackages+wherefiles> for help with installing new fonts and packages.

1.1 Document Usage

Each section of this document contains a number of font tables. Each table shows a set of symbols, with the corresponding L^AT_EX command to the right of each symbol. A table’s caption indicates what package needs to be loaded in order to access that table’s symbols. For example, the symbols in Table 23, “textcomp Old-Style Numerals”, are made available by putting “`\usepackage{textcomp}`” in your document’s preamble. “*AMS*” means to use the *AMS* packages, viz. `amssymb` and/or `amsmath`. Notes below a table provide additional information about some or all the symbols in that table.

One note that appears a few times in this document, particularly in Section 2, indicates that certain symbols do not exist in the OT1 font encoding (Donald Knuth’s original, 7-bit font encoding, which is the default font encoding for L^AT_EX) and that you should use `fontenc` to select a different encoding, such as T1 (a common 8-bit font encoding). That means that you should put “`\usepackage[⟨encoding⟩]{fontenc}`” in your document’s preamble, where *⟨encoding⟩* is, e.g., T1 or LY1. To limit the change in font encoding to the current group, use “`\fontencoding{⟨encoding⟩}\selectfont`”.

Section 7 contains some additional information about the symbols in this document. It shows which symbol names are not unique across packages, gives examples of how to create new symbols out of existing symbols, explains how symbols are spaced in math mode, presents a L^AT_EX ASCII and Latin 1 tables, and provides some information about this document itself. The Comprehensive L^AT_EX Symbol List ends with an index of all the symbols in the document and various additional useful terms.

1.2 Frequently Requested Symbols

There are a number of symbols that are requested over and over again on `comp.text.tex`. If you’re looking for such a symbol the following list will help you find it quickly.

␣, as in “Spaces are significant.”	7	⩽ and ⩾	27
í, ì, î, etc. (versus í, ì, î, and î)	11	∴	41
¢	14	°, as in “180°” or “15°C”	43
€	14	ℒ, ℱ, etc.	44
©, ®, and ™	15	ℕ, ℤ, ℝ, etc.	44
‰	15	ƒ	63
ff	22	á, è, etc. (i.e., several accents per character)	65
∴	23	<, >, and (instead of j, l, and —)	71
:= and ::	24	^ and ~ (or ~)	72

2 Body-text symbols

This section lists symbols that are intended for use in running text, such as punctuation marks, accents, ligatures, and currency symbols.

TABLE 1: L^AT_EX 2_ε Escapable “Special” Characters

\$	\\$	%	\%	-	_*	}	\}	&	\&	#	\#	{	\{
----	-----	---	----	---	-----	---	----	---	----	---	----	---	----

* The `underscore` package redefines “_” to produce an underscore in text mode (i.e., it makes it unnecessary to escape the underscore character).

TABLE 2: L^AT_EX 2_ε Commands Defined to Work in Both Math and Text Mode

\$	\\$	-	_	‡	\ddag	{	\{
¶	\P	©	\copyright	...	\dots	}	\}
§	\S	†	\dag	£	\pounds		

Where two symbols are present, the left one is the “faked” symbol that L^AT_EX 2_ε provides by default, and the right one is the “true” symbol that `textcomp` makes available.

TABLE 3: Predefined L^AT_EX 2_ε Text-mode Commands

^	\textasciicircum	<	\textless
~	\textasciitilde	ª	\textordfeminine
*	\textasteriskcentered	º	\textordmasculine
\	\textbackslash	¶	\textparagraph
	\textbar	.	\textperiodcentered
{	\textbraceleft	¿	\textquestiondown
}	\textbraceright	“	\textquotedblleft
•	\textbullet	”	\textquotedblright
©	\textcopyright	‘	\textquoteleft
†	\textdagger	’	\textquoteright
‡	\textdaggerdbl	®	\textregistered
\$	\textdollar	§	\textsection
...	\textellipsis	£	\textsterling
—	\textemdash	™	\texttrademark
-	\textendash	_	\textunderscore
¡	\textexclamdown	␣	\textvisiblespace
>	\textgreater		

Where two symbols are present, the left one is the “faked” symbol that L^AT_EX 2_ε provides by default, and the right one is the “true” symbol that `textcomp` makes available.

TABLE 4: Non-ASCII Letters (Excluding Accented Letters)

Ǻ	\aa	Ð	\DH*	Ł	\L	ø	\o	ß	\ss
Å	\AA	ð	\dh*	ł	\l	Ø	\O	SS	\SS
Æ	\AE	Đ	\DJ*	Ǫ	\NG*	Œ	\OE	Þ	\TH*
æ	\ae	đ	\dj*	ŋ	\ng*	œ	\oe	þ	\th*

* Not available in the OT1 font encoding. Use the `fontenc` package to select an alternate font encoding, such as T1.

TABLE 5: Letters Used to Typeset African Languages

Đ	\B{D}	ċ	\m{c}	f	\m{f}	k	\m{k}	t	\M{t}	Ƶ	\m{Z}
đ	\B{d}	Ḑ	\m{D}	F	\m{F}	Ǫ	\m{N}	Ṭ	\M{T}	Ɛ	\T{E}
H	\B{H}	ḑ	\M{d}	Ƴ	\m{G}	ŋ	\m{n}	ṭ	\m{t}	ɛ	\T{e}
h	\B{h}	Ḑ	\M{D}	Ƴ	\m{g}	ɔ	\m{o}	Ṭ	\m{T}	Ɔ	\T{O}
t	\B{t}	ḑ	\m{d}	Ḑ	\m{I}	Ɔ	\m{O}	u	\m{u}*	ɔ	\T{o}
T	\B{T}	Ɛ	\m{E}	ι	\m{i}	Ɔ	\m{P}	U	\m{U}*		
ḑ	\m{b}	ɛ	\m{e}	Ƴ	\m{J}	ṭ	\m{p}	Y	\m{Y}		
Ḑ	\m{B}	Ɛ	\M{E}	ɲ	\m{j}	Ƶ	\m{s}	Ƴ	\m{y}		
Ɔ	\m{C}	ə	\M{e}	K	\m{K}	Ƶ	\m{S}	Ƶ	\m{z}		

These characters all need the T4 font encoding, which is provided by the `fc` package.

* \m{v} and \m{V} are synonyms for \m{u} and \m{U}.

TABLE 6: Punctuation Marks Not Found in OT1

«	\guillemotleft	<	\guilsinglleft	„	\quotedblbase	"	\textquotedbl
»	\guillemotright	>	\guilsinglright	,	\quotesinglbase		

To get these symbols, use the `fontenc` package to select an alternate font encoding, such as T1.

TABLE 7: pifont Decorative Punctuation Marks

•	\ding{123}	“	\ding{125}	¶	\ding{161}	•	\ding{163}
•	\ding{124}	”	\ding{126}	•	\ding{162}		

TABLE 8: wasysym Phonetic Symbols

Đ	\DH	ð	\dh	ɔ	\openo
Þ	\Thorn	ə	\inve	þ	\thorn

TABLE 9: tipa Phonetic Symbols

ɹ	\textbabygamma	ʔ	\textglotstop	ŋ	\textrightailn
ḃ	\textbarb	˙	\texthalflength	ɿ	\textrightailr
ε	\textbarc	ɸ	\texthardsign	ʂ	\textrightails
ḍ	\textbard	˘	\texthooktop	ʈ	\textrightailt
ɟ	\textbardotlessj	Ḅ	\texthtb	ʐ	\textrightailz
ḡ	\textbarg	f	\texthtbardotlessj	ˌ	\textrightahook
ʔ	\textbarglotstop	ɕ	\texthtc	ʌ	\texttsca
i	\textbari	ɖ	\texthtd	Ɂ	\texttscb
ɪ	\textbarl	ɡ	\texthtg	ɛ	\texttsce
ø	\textbaro	ɦ	\texthth	ɜ	\texttscg
ɸ	\textbarrevglotstop	ɰ	\texththeng	ɧ	\texttsch
u	\textbaru	k	\texthtk	ə	\texttschwa
ɬ	\textbeltl	ɸ	\texthtp	ɪ	\texttsci
β	\textbeta	q	\texthtq	ɹ	\texttscj
⊙	\textbullseye	ɕ	\texthtrtaild	ɹ	\texttscl
˘	\textceltpal	ɕ	\texthtscg	ɹ	\texttscn
χ	\textchi	f	\texthtt	œ	\texttscoelig
ɐ	\textcloseepsilon	h	\texthvlig	Ω	\texttscomega
ω	\textcloseomega	ɰ	\textinvglotstop	ɹ	\texttscr
ɜ	\textcloserevepsilon	Ɂ	\textinvscr	ɑ	\textscripta
ʐ	\textcommatailz	ɪ	\textiota	ɡ	\textscriptg
˘	\textcorner	λ	\textlambda	ʋ	\textscriptv
ḃ	\textcrb	:	\textlengthmark	ʊ	\textscu
ḍ	\textcrd	ɰ	\textlhookt	ɹ	\textscy
ɡ	\textcrg	ɹ	\textlhtlongi	ˌ	\textsecstress
h	\textcrh	ɹ	\textlhtlongy	ɸ	\textsoftsign
ɰ	\textcrinvglotstop	ɹ	\textlongleg	ɕ	\textstretchc
λ	\textcrlambda	˘	\textlptr	ɕ	\texttctclig
ʐ	\textcrtwo	ɹ	\textltailm	ɕ	\texttctclig
ɕ	\textctc	ɹ	\textltailn	θ	\textttheta
ɕ	\textctd	ɹ	\textltilde	ɸ	\textthorn
ɕ	\textctdctzlig	ɸ	\textlyoghlig	ɹ	\texttoneletterstem
ɕ	\textctesh	ɹ	\textOardotlessj	ts	\texttslig
ɹ	\textctj	ɸ	\textOlyoghlig	ɐ	\textturna
ɹ	\textctn	ω	\textomega	æ	\textturncelig
ɸ	\textctt	˘	\textopencorner	ɹ	\textturnh
ɕ	\textcttctclig	ɰ	\textopeno	ɹ	\textturnk
ɰ	\textctyogh	˘	\textpalhook	ɹ	\textturnlongleg
ɰ	\textctz	ɕ	\textphi	ɹ	\textturnm
ɕ	\textdctzlig	ɹ	\textpipe	ɹ	\textturnmrleg
f	\textdoublebaresh	˘	\textprimstress	ɹ	\textturnr
ɸ	\textdoublebarpipe	ʔ	\textraiseglotstop	ɹ	\textturnrrtail
≠	\textdoublebarslash	ɹ	\textraisevibyi	ɹ	\textturnscripta
	\textdoublepipe	ɹ	\texttramshorns	ɹ	\textturnt
	\textdoublevertline	˘	\textrevapostrophe	ɹ	\textturnv
↓	\textdownstep	ɜ	\textreve	ɹ	\textturnw
ɕ	\textdyoghlig	ɜ	\textrevepsilon	ɹ	\textturny
ɕ	\textdzlig	ɹ	\textrevglotstop	ʊ	\textupsilon
ε	\textepsilon	ɕ	\textrevyogh	↑	\textupstep

(continued on next page)

(continued from previous page)

ʃ	\textesh	ʒ	\textrhookrevepsilon		\textvertline
ɾ	\textfishhookr	ʝ	\textrhookschwa	ɿ	\textvibyi
ɡ	\textg	˘	\textrhoticity	ʋ	\textvibyy
γ	\textgamma	>	\textrp̄tr	ɹ	\textwynn
↘	\textglobfall	ɔ̣	\textrtaild	ʒ	\textyogh
↗	\textglobrise	ɔ̤	\textrtaill		

tipa defines shortcut characters for many of the above. It also defines a command \tone for denoting tone letters (itches). See the tipa documentation for more information.

TABLE 10: wsuipa Phonetic Symbols

ɤ	\babygamma	ŋ	\eng	ŋ	\labdentalnas	ə	\schwa
ɸ	\barb	ʝ	\er	ɬ	\latfric	ɪ	\sci
ɸ	\bard	ʃ	\esh	ɹ	\legm	N	\scn
ɪ	\bari	ð	\eth	ɾ	\legr	R	\scr
ɬ	\barl	ɾ	\flapr	ɿ	\lz	ɑ	\scripta
ə	\baro	ʔ	\glotstop	α	\nialpha	ɡ	\scriptg
ɸ	\barp	β	\hookb	β	\nibeta	ʋ	\scriptv
ɬ	\barsci	ɸ	\hookd	χ	\nich	U	\scu
ɸ	\barscu	ɸ	\hookg	ε	\niepsilon	Y	\scy
ɸ	\baru	ɸ	\hookh	γ	\nigamma	ʃ	\slashb
⊙	\clickb	ɸ	\hookheng	ι	\niiota	ø	\slashc
⊙	\clickc	ʒ	\hookrevepsilon	λ	\nilambda	ø	\slashd
ɬ	\clickt	h	\hv	ω	\niomega	ɹ	\slashu
ω	\closedniomega	e	\inva	φ	\niphi	ɔ̣	\taild
ɔ̣	\closedrevepsilon	ɟ	\invf	σ	\nisigma	ɔ̤	\tailinvr
ɸ	\crossb	ɔ̤	\invglotstop	θ	\nitheta	ɔ̥	\taill
ɸ	\crossd	ɹ	\invh	ʋ	\niupsilon	ɹ	\tailn
ɸ	\crossh	ɬ	\invlegr	ɹ	\nj	ɔ̥	\tailr
λ	\crossnilambda	u	\invm	oo	\oo	ɔ̥	\tails
ɔ̥	\curlyc	ɩ	\invr	ɔ̥	\openo	ɔ̥	\tailt
ɔ̥	\curlyesh	ɩ	\invscr	ə	\reve	ɔ̥	\tailz
ɔ̥	\curlyyogh	ɩ	\invscripta	ɔ̥	\reveject	ɔ̥	\tesh
ɔ̥	\curlyz	ɩ	\invv	ɔ̥	\revepsilon	ɔ̥	\thorn
ɩ	\dlbari	ɩ	\invw	ɩ	\revglotstop	ɩ	\tildel
ɔ̥	\dz	ɩ	\invy	D	\scd	ɔ̥	\yogh
ɔ̥	\ejective	ɩ	\ipagamma	G	\scg		

TABLE 11: phonetic Phonetic Symbols

j	\barj	r	\flap	i	\libar	ɒ	\rotvara	ɪ	\vari
λ	\barlambda	ʔ	\glottal	ɔ	\openo	ɹ	\rotw	ω	\varomega
ŋ	\emgma	ʙ	\hausab	h	\planck	ʀ	\roty	ɔ	\varopeno
ŋ	\engma	ʙ	\hausab	Λ	\pwedge	ə	\schwa	ʏ	\vod
ɲ	\enya	ɗ	\hausad	ɔ	\revD	þ	\thorn	ɦ	\voicedh
ε	\epsi	ɗ	\hausad	ɪ	\riota	ʉ	\ubar	ʒ	\yogh
ʃ	\esh	k	\hausak	ʉ	\rotm	ɥ	\udesc		
ð	\eth	K	\hausak	υ	\rotOmega	ɑ	\vara		
fj	\fj	ɗ	\hookd	ɹ	\rotr	g	\varg		

TABLE 12: Text-mode Accents

Ää	\{"A}\{a}	Àà	\{'A}\{'a}	Ǻǻ	\H{A}\H{a}	Ǻǻ	\u{A}\u{a}
Áá	\' {A}\' {a}	Āā	\b{A}\b{a}	Ảả	\k{A}\k{a}†	Ǻǻ	\v{A}\v{a}
Ăă	\. {A}\. {a}	Ȧȧ	\c{A}\c{a}	Ȧȧ	\r{A}\r{a}	Ăă	\~{A}\~{a}
Ȧȧ	\={A}\={a}	Ȧȧ	\d{A}\d{a}	Ȧȧ	\t{A}\t{a}		
Ȧȧ	\^{A}\^{a}	Ȧȧ	\G{A}\G{a}‡	Ȧȧ	\U{A}\U{a}‡		
Ȧȧ	\newtie{A}\newtie{a}*	Ȧȧ	\textcircled{A}\textcircled{a}				

* Requires the `textcomp` package.

† Not available in the OT1 font encoding. Use the `fontenc` package to select an alternate font encoding, such as T1.

‡ Requires the T4 font encoding, provided by the `fc` package.

Also note the existence of `\i` and `\j`, which produce dotless versions of “i” and “j” (viz., “i” and “j”). These are useful when the accent is supposed to replace the dot. For example, “`na\{"i}ve`” produces a correct “naïve”, while “`na\{i}ve`” would yield the rather odd-looking “naïve”. (“`na\{i}ve`” *does* work in encodings other than OT1, however.)

TABLE 13: tipa Text-mode Accents

Ǻǻ	\textacutemacron{A}\textacutemacron{a}
Ǻǻ	\textacutewedge{A}\textacutewedge{a}
Ȧȧ	\textadvancing{A}\textadvancing{a}
Ȧȧ	\textbottomtiebar{A}\textbottomtiebar{a}
Ȧȧ	\textbrevemacron{A}\textbrevemacron{a}
Ȧȧ	\textcircumacute{A}\textcircumacute{a}

(continued on next page)

(continued from previous page)

$\hat{A}\hat{a}$ `\textcirc{A}\textcirc{a}`
 $\acute{A}\acute{a}$ `\textdotacute{A}\textdotacute{a}`
 $\breve{A}\breve{a}$ `\textdotbreve{A}\textdotbreve{a}`
 $\grave{A}\grave{a}$ `\textdotbreve{A}\textdotbreve{a}`
 $\ddot{A}\ddot{a}$ `\textdoublegrave{A}\textdoublegrave{a}`
 $\text{\AA}\text{\AA}$ `\textdoublevbaraccent{A}\textdoublevbaraccent{a}`
 $\tilde{A}\tilde{a}$ `\textgravecircum{A}\textgravecircum{a}`
 $\grave{A}\grave{a}$ `\textgravedot{A}\textgravedot{a}`
 $\grave{A}\grave{a}$ `\textgravemacron{A}\textgravemacron{a}`
 $\grave{A}\grave{a}$ `\textgravemid{A}\textgravemid{a}`
 $\text{\textcirc{A}}\text{\textcirc{a}}$ `\textinvsubbridge{A}\textinvsubbridge{a}`
 $\text{\textcirc{A}}\text{\textcirc{a}}$ `\textlowering{A}\textlowering{a}`
 $\acute{A}\acute{a}$ `\textmidacute{A}\textmidacute{a}`
 $\text{\textcirc{A}}\text{\textcirc{a}}$ `\textovercross{A}\textovercross{a}`
 $\text{\textcirc{A}}\text{\textcirc{a}}$ `\textoverw{A}\textoverw{a}`
 $\text{\textcirc{A}}\text{\textcirc{a}}$ `\textpolhook{A}\textpolhook{a}`
 $\text{\textcirc{A}}\text{\textcirc{a}}$ `\textraising{A}\textraising{a}`
 $\text{\textcirc{A}}\text{\textcirc{a}}$ `\textretracting{A}\textretracting{a}`
 $\text{\textcirc{A}}\text{\textcirc{a}}$ `\textringmacron{A}\textringmacron{a}`
 $\hat{A}\hat{a}$ `\textroundcap{A}\textroundcap{a}`
 $\text{\textcirc{A}}\text{\textcirc{a}}$ `\textseagull{A}\textseagull{a}`
 $\text{\textcirc{A}}\text{\textcirc{a}}$ `\textsubacute{A}\textsubacute{a}`
 $\text{\textcirc{A}}\text{\textcirc{a}}$ `\textsubarch{A}\textsubarch{a}`
 $\text{\textcirc{A}}\text{\textcirc{a}}$ `\textsubbar{A}\textsubbar{a}`
 $\text{\textcirc{A}}\text{\textcirc{a}}$ `\textsubbridge{A}\textsubbridge{a}`
 $\text{\textcirc{A}}\text{\textcirc{a}}$ `\textsubcircum{A}\textsubcircum{a}`
 $\text{\textcirc{A}}\text{\textcirc{a}}$ `\textsubdot{A}\textsubdot{a}`
 $\text{\textcirc{A}}\text{\textcirc{a}}$ `\textsubgrave{A}\textsubgrave{a}`
 $\text{\textcirc{A}}\text{\textcirc{a}}$ `\textsublhalfiring{A}\textsublhalfiring{a}`
 $\text{\textcirc{A}}\text{\textcirc{a}}$ `\textsubplus{A}\textsubplus{a}`
 $\text{\textcirc{A}}\text{\textcirc{a}}$ `\textsubrhalfiring{A}\textsubrhalfiring{a}`
 $\text{\textcirc{A}}\text{\textcirc{a}}$ `\textsubring{A}\textsubring{a}`
 $\text{\textcirc{A}}\text{\textcirc{a}}$ `\textsubsquare{A}\textsubsquare{a}`
 $\text{\textcirc{A}}\text{\textcirc{a}}$ `\textsubtilde{A}\textsubtilde{a}`
 $\text{\textcirc{A}}\text{\textcirc{a}}$ `\textsubumlaut{A}\textsubumlaut{a}`
 $\text{\textcirc{A}}\text{\textcirc{a}}$ `\textsubw{A}\textsubw{a}`
 $\text{\textcirc{A}}\text{\textcirc{a}}$ `\textsubwedge{A}\textsubwedge{a}`
 $\text{\textcirc{A}}\text{\textcirc{a}}$ `\textsuperimposetilde{A}\textsuperimposetilde{a}`
 $\text{\textcirc{A}}\text{\textcirc{a}}$ `\textsyllabic{A}\textsyllabic{a}`

(continued on next page)

(continued from previous page)

$\tilde{\text{A}}\tilde{\text{a}}$	<code>\texttildedot{A}\texttildedot{a}</code>
$\widehat{\text{A}}\widehat{\text{a}}$	<code>\texttoptiebar{A}\texttoptiebar{a}</code>
$\dot{\text{A}}\dot{\text{a}}$	<code>\textvbaraccent{A}\textvbaraccent{a}</code>

`tipa` defines shortcut sequences for many of the above. See the `tipa` documentation for more information.

TABLE 14: `wsuipa` Text-mode Accents

$\underset{\cdot}{\text{A}}\underset{\cdot}{\text{a}}$	<code>\dental{A}\dental{a}</code>
$\underset{\cdot}{\text{A}}\underset{\cdot}{\text{a}}$	<code>\underarch{A}\underarch{a}</code>

TABLE 15: `phonetic` Text-mode Accents

$\underset{\cdot}{\text{A}}\underset{\cdot}{\text{a}}$	<code>\hill{A}\hill{a}</code>	$\underset{\cdot}{\text{A}}\underset{\cdot}{\text{a}}$	<code>\rc{A}\rc{a}</code>	$\underset{\cdot}{\text{A}}\underset{\cdot}{\text{a}}$	<code>\ut{A}\ut{a}</code>
$\underset{\cdot}{\text{A}}\underset{\cdot}{\text{a}}$	<code>\od{A}\od{a}</code>	$\underset{\cdot}{\text{A}}\underset{\cdot}{\text{a}}$	<code>\syl{A}\syl{a}</code>		
$\underset{\cdot}{\text{A}}\underset{\cdot}{\text{a}}$	<code>\ohill{A}\ohill{a}</code>	$\underset{\cdot}{\text{A}}\underset{\cdot}{\text{a}}$	<code>\td{A}\td{a}</code>		

The `phonetic` package provides a few additional macros for linguistic accents. `\acbar` and `\acarc` compose characters with multiple accents; for example, `\acbar{\'}{a}` produces “ \acute{a} ” and `\acarc{\"}{e}` produces “ \ddot{e} ”. `\labvel` joins two characters with an arc: `\labvel{mn}` \rightarrow “ \overline{mn} ”. `\upbar` is intended to go between characters as in “ $x\overline{\{y\}}$ ” \rightarrow “ x^y ”. Lastly, `\uplett` behaves like `\textsuperscript` but uses a smaller font. Contrast “ $p\uplett{h}$ ” \rightarrow “ p^h ” with “ ph ” \rightarrow “ p^h ”.

TABLE 16: `wsuipa` Diacritics

‘	<code>\ain</code>	‘	<code>\leftp</code>	‘	<code>\overring</code>	‘	<code>\stress</code>	‘	<code>\underwedge</code>
‘	<code>\corner</code>	‘	<code>\leftt</code>	‘	<code>\polishhook</code>	‘	<code>\syllabic</code>	‘	<code>\upp</code>
‘	<code>\downp</code>	‘	<code>\length</code>	‘	<code>\rightp</code>	‘	<code>\underdots</code>	‘	<code>\upt</code>
‘	<code>\downt</code>	‘	<code>\midtilde</code>	‘	<code>\rightt</code>	‘	<code>\underring</code>		
‘	<code>\halflength</code>	‘	<code>\open</code>	‘	<code>\secstress</code>	‘	<code>\undertilde</code>		

The `wsuipa` package defines all of the above as ordinary characters, not as accents. However, it does provide `\diatop` and `\diaunder` commands, which are used to compose diacritics with other characters. For example, `\diatop[\overring]a` produces “ $\text{‘}\acute{a}$ ”, and `\diaunder[\underdots]a` produces “ $\text{‘}\ddot{a}$ ”. See the `wsuipa` documentation for more information.

TABLE 17: textcomp Diacritics

"	\textacutedbl	˘	\textasciicaron	—	\textasciimacron
ˆ	\textasciiacute	¨	\textasciidieresis	“	\textgravedbl
˘	\textasciibreve	`	\textasciigrave		

The `textcomp` package defines all of the above as ordinary characters, not as accents.

TABLE 18: textcomp Currency Symbols

฿	\textbaht	\$	\textdollar	₵	\textguarani	₩	\textwon
¢	\textcent	\$	\textdollaroldstyle	£	\textlira	¥	\textyen
¢	\textcentoldstyle	₫	\textdong	₦	\textnaira		
₯	\textcolonmonetary	€	\texteuro	P	\textpeso		
₣	\textcurrency	f	\textflorin	£	\textsterling		

TABLE 19: marvosym Currency Symbols

₴	\Denarius	€	\EUR	€	\EURdig	€	\EURtm	₧	\Pfund
@	\Ecommerce	€	\EURcr	€	\EURhv	\$	\EyesDollar	β	\Shilling

The different euro signs are meant to be compatible with different fonts—Courier (`\EURcr`), Helvetica (`\EURhv`), Times (`\EURtm`), and the `marvosym` digits listed in Table 134 (`\EURdig`).

TABLE 20: wasysym Currency Symbols

¢	\cent	₣	\currency
---	-------	---	-----------

TABLE 21: eurosym Euro Signs

€	\geneuro	€	\geneuronarrow	€	\geneurowide	€	\officiaaleuro
---	----------	---	----------------	---	--------------	---	----------------

`\euro` is automatically mapped to one of the above—by default, `\officiaaleuro`—based on a `eurosymb` package option. See the `eurosymb` documentation for more information. The `\geneuro...` characters are generated from the current body font’s “C” character and therefore may not appear exactly as shown.

TABLE 22: textcomp Legal Symbols

⒫	<code>\textcircledP</code>	©	©	<code>\textcopyright</code>	SM	<code>\textservicemark</code>
Ⓒ	<code>\textcopyleft</code>	®	®	<code>\textregistered</code>	TM	<code>\texttrademark</code>

Where two symbols are present, the left one is the “faked” symbol that L^AT_EX 2_ε provides by default, and the right one is the “true” symbol that textcomp makes available.

See <http://www.tex.ac.uk/cgi-bin/texfaq2html?label=tradesyms> for solutions to common problems that occur when using these symbols (e.g., getting a “⒫” when you expected to get a “®”).

TABLE 23: textcomp Old-style Numerals

0	<code>\textzerooldstyle</code>	4	<code>\textfouroldstyle</code>	8	<code>\texteightoldstyle</code>
1	<code>\textoneoldstyle</code>	5	<code>\textfiveoldstyle</code>	9	<code>\textnineoldstyle</code>
2	<code>\texttwooldstyle</code>	6	<code>\textsixoldstyle</code>		
3	<code>\textthreeoldstyle</code>	7	<code>\textsevenoldstyle</code>		

Rather than use the bulky `\textoneoldstyle`, `\texttwooldstyle`, etc. commands shown above, consider using `\oldstylenums{...}` to typeset an old-style number.

TABLE 24: Miscellaneous textcomp Symbols

*	<code>\textasteriskcentered</code>	ª	ª	<code>\textordfeminine</code>
	<code>\textbardbl</code>	º	º	<code>\textordmasculine</code>
◯	<code>\textbigcircle</code>	¶	¶	<code>\textparagraph</code>
␣	<code>\textblank</code>	.	.	<code>\textperiodcentered</code>
	<code>\textbrokenbar</code>	‰	‰	<code>\textpertenthousand</code>
•	<code>\textbullet</code>	‱	‱	<code>\textperthousand</code>
†	<code>\textdagger</code>	¶	¶	<code>\textpilcrow</code>
‡	<code>\textdaggerdbl</code>	'	'	<code>\textquotesingle</code>
=	<code>\textdblhyphen</code>	,	,	<code>\textquotestraightbase</code>
=	<code>\textdblhyphenchar</code>	„	„	<code>\textquotestraightdblbase</code>
%	<code>\textdiscount</code>	℞	℞	<code>\textrecipe</code>
€	<code>\textestimated</code>	※	※	<code>\textreferencemark</code>
?	<code>\textinterrobang</code>	§	§	<code>\textsection</code>
‡	<code>\textinterrobangdown</code>	—	—	<code>\textthreequartersemdash</code>
♪	<code>\textmusicalnote</code>	~	~	<code>\texttildelow</code>
№	<code>\textnumero</code>	—	—	<code>\texttwelveudash</code>
◦	<code>\textopenbullet</code>			

Where two symbols are present, the left one is the “faked” symbol that L^AT_EX 2_ε provides by default, and the right one is the “true” symbol that textcomp makes available.

TABLE 25: Miscellaneous wasysym Text-mode Symbols

‰	<code>\permil</code>
---	----------------------

TABLE 26: \mathcal{AMS} Commands Defined to Work in Both Math and Text Mode

\checkmark	<code>\checkmark</code>	$\textcircled{\text{R}}$	<code>\circledR</code>	⌘	<code>\maltese</code>
--------------	-------------------------	--------------------------	------------------------	------------	-----------------------

3 Mathematical symbols

Most, but not all, of the symbols in this section are math-mode only. That is, they yield a “Missing \$ inserted” error message if not used within $\$. . \$$, $\backslash[. . \backslash]$, or another math-mode environment. Operators marked as “variable-sized” are taller in displayed formulas, shorter in in-text formulas, and possibly shorter still when used in various levels of superscripts or subscripts.

Alphanumeric symbols (e.g., “ \mathcal{L} ” and “ \mathbb{Z} ”) are usually produced using one of the math alphabets in Table 135 rather than with an explicit symbol command. Look there first if you need a symbol for a transform, number set, or some other alphanumeric.

Although there have been many requests on `comp.text.tex` for a contradiction symbol, the ensuing discussion invariably reveals innumerable ways to represent contradiction in a proof, including “ \blacksquare ” (`\blitza`), “ $\Rightarrow\Leftarrow$ ” (`\Rightarrow\Leftarrow`), “ \perp ” (`\bot`), “ \Leftrightarrow ” (`\nleqtrightharpoonup`), and “ $\text{\textcircled{*}}$ ” (`\textcircled{*}`). Because of the lack of notational consensus, it is probably better to spell out “Contradiction!” than to use a symbol for this purpose. Similarly, discussions on `comp.text.tex` have revealed that there are a variety of ways to indicate the mathematical notion of “is defined as”. Common candidates include “ \triangleq ” (`\triangleq`), “ \equiv ” (`\equiv`), “ \coloneqq ” (`\coloneqq`), and “ $\stackrel{\text{def}}{=}$ ” (`\stackrel{\text{def}}{=}`). See also the example of `\equalsfill` on page 66.

TABLE 27: Binary Operators

\amalg	<code>\amalg</code>	\cup	<code>\cup</code>	\oplus	<code>\oplus</code>	\times	<code>\times</code>
\ast	<code>\ast</code>	\dagger	<code>\dagger</code>	\oslash	<code>\oslash</code>	\triangleleft	<code>\triangleleft</code>
\bigcirc	<code>\bigcirc</code>	\ddagger	<code>\ddagger</code>	\otimes	<code>\otimes</code>	\triangleright	<code>\triangleright</code>
\bigtriangledown	<code>\bigtriangledown</code>	\diamond	<code>\diamond</code>	\pm	<code>\pm</code>	\triangleleft^*	<code>\unlhd^*</code>
\bigtriangleup	<code>\bigtriangleup</code>	\div	<code>\div</code>	\triangleright	<code>\rhd^*</code>	\triangleleft^*	<code>\unrhd^*</code>
\bullet	<code>\bullet</code>	\triangleleft	<code>\lhd^*</code>	\setminus	<code>\setminus</code>	\oplus	<code>\uplus</code>
\cap	<code>\cap</code>	\mp	<code>\mp</code>	\sqcap	<code>\sqcap</code>	\vee	<code>\vee</code>
\cdot	<code>\cdot</code>	\odot	<code>\odot</code>	\sqcup	<code>\sqcup</code>	\wedge	<code>\wedge</code>
\circ	<code>\circ</code>	\ominus	<code>\ominus</code>	\star	<code>\star</code>	\wr	<code>\wr</code>

* Not predefined in $\text{\LaTeX} 2_{\epsilon}$. Use one of the packages `latexsym`, `amssymb`, `txfonts`, `pxfonts`, or `wasysym`.

TABLE 28: \mathcal{AMS} Binary Operators

$\bar{\wedge}$	<code>\barwedge</code>	\odot	<code>\circledcirc</code>	\intercal	<code>\intercal</code>
\boxdot	<code>\boxdot</code>	\ominus	<code>\circleddash</code>	λ	<code>\leftthreetimes</code>
\boxminus	<code>\boxminus</code>	\cup	<code>\Cup</code>	\ltimes	<code>\ltimes</code>
\boxplus	<code>\boxplus</code>	\curlyvee	<code>\curlyvee</code>	\rtimes	<code>\rtimes</code>
\boxtimes	<code>\boxtimes</code>	\curlywedge	<code>\curlywedge</code>	\smallsetminus	<code>\smallsetminus</code>
\Cap	<code>\Cap</code>	\divideontimes	<code>\divideontimes</code>	\veebar	<code>\veebar</code>
\centerdot	<code>\centerdot</code>	\dotplus	<code>\dotplus</code>		
\circledast	<code>\circledast</code>	\doublebarwedge	<code>\doublebarwedge</code>		

TABLE 29: stmaryrd Binary Operators

Φ	<code>\baro</code>	\parallel	<code>\interleave</code>	\otimes	<code>\varoast</code>
\backslash	<code>\bbslash</code>	\triangleleft	<code>\leftslice</code>	\oplus	<code>\varobar</code>
$\&$	<code>\binampersand</code>	\M	<code>\merge</code>	\oslash	<code>\varobslash</code>
\wp	<code>\bindnasrepma</code>	\ominus	<code>\minuso</code>	\odot	<code>\varocircle</code>
\boxplus	<code>\boxast</code>	\pm	<code>\moo</code>	\odot	<code>\varodot</code>
\boxbar	<code>\boxbar</code>	\oplus	<code>\nplus</code>	\oslash	<code>\varogreaterthan</code>
\boxbox	<code>\boxbox</code>	\oplus	<code>\obar</code>	\oslash	<code>\varolessthan</code>
\boxbslash	<code>\boxbslash</code>	\square	<code>\oblong</code>	\ominus	<code>\varominus</code>
\boxcircle	<code>\boxcircle</code>	\oslash	<code>\obslash</code>	\oplus	<code>\varoplus</code>
\boxdot	<code>\boxdot</code>	\oslash	<code>\ogreaterthan</code>	\oslash	<code>\varoslash</code>
\boxempty	<code>\boxempty</code>	\oslash	<code>\olessthan</code>	\otimes	<code>\varotimes</code>
\boxslash	<code>\boxslash</code>	\oslash	<code>\ovee</code>	\oslash	<code>\varovee</code>
\curlyveedownarrow	<code>\curlyveedownarrow</code>	\oslash	<code>\owedge</code>	\oslash	<code>\varowedge</code>
\curlyveeuparrow	<code>\curlyveeuparrow</code>	\triangleright	<code>\rightslice</code>	\times	<code>\vartimes</code>
\curlywedgedownarrow	<code>\curlywedgedownarrow</code>	\parallel	<code>\sslash</code>	γ	<code>\Ydown</code>
\curlywedgearrow	<code>\curlywedgearrow</code>	\parallel	<code>\talloblong</code>	\prec	<code>\Yleft</code>
\fatbslash	<code>\fatbslash</code>	\bigcirc	<code>\varbigcirc</code>	\succ	<code>\Yright</code>
\fatsemi	<code>\fatsemi</code>	γ	<code>\varcurlyvee</code>	\curlywedge	<code>\Yup</code>
\fatslash	<code>\fatslash</code>	\curlywedge	<code>\varcurlywedge</code>		

TABLE 30: wasysym Binary Operators

\triangleleft	<code>\lhd</code>	\bigcirc	<code>\ocircle</code>	\blacktriangleright	<code>\RHD</code>	\supseteq	<code>\unrhd</code>
\blacktriangleleft	<code>\LHD</code>	\triangleright	<code>\rhd</code>	\trianglelefteq	<code>\unlhd</code>		

TABLE 31: txfonts/pxfonts Binary Operators

\oplus	<code>\circledbar</code>	\oslash	<code>\circledwedge</code>	\bigcirc	<code>\medcirc</code>
\oslash	<code>\circledbslash</code>	\wp	<code>\invamp</code>	\boxplus	<code>\sqcapplus</code>
\oslash	<code>\circledvee</code>	\bullet	<code>\medbullet</code>	\boxplus	<code>\sqcupplus</code>

TABLE 32: mathabx Binary Operators

*	\ast	\wedge	\curlywedge	\sqcap	\sqcap
*	\Asterisk	\div	\divdot	\sqcup	\sqcup
$\bar{\wedge}$	\barwedge	\ast	\divideontimes	\sqcap	\sqdoublecap
★	\bigstar	$\dot{-}$	\dotdiv	\sqcup	\sqdoublecup
★	\bigvarstar	$\dot{+}$	\dotplus	\square	\square
◆	\blackdiamond	$\dot{\times}$	\dottimes	\boxplus	\sqplus
\cap	\cap	$\bar{\wedge}$	\doublebarwedge	\cdot	\udot
\dagger	\circplus	\cap	\doublecap	\oplus	\uplus
*	\coasterisk	\cup	\doublecup	*	\varstar
*	\coAsterisk	\ltimes	\ltimes	\vee	\vee
*	\convolution	\oplus	\pluscirc	\veebar	\veebar
\cup	\cup	\rtimes	\rtimes	\veedoublebar	\veedoublebar
\vee	\curlyvee	▪	\sqbullet	\wedge	\wedge

Many of the above glyphs go by multiple names. `\centerdot` is equivalent to `\sqbullet`, and `\ast` is equivalent to `*`. `\asterisk` produces the same glyph as `\ast`, but as an ordinary symbol, not a binary operator. Similarly, `\bigast` produces a large-operator version of the `\Asterisk` binary operator, and `\bigcoast` produces a large-operator version of the `\coAsterisk` binary operator.

TABLE 33: ulsy Geometric Binary Operators

\oplus \odplus

TABLE 34: mathabx Geometric Binary Operators

▼	\blacktriangledown	\boxright	\boxright	\ominus	\ominus
◀	\blacktriangleleft	\boxslash	\boxslash	\oplus	\oplus
▶	\blacktriangleright	\boxtimes	\boxtimes	\otimes	\otimes
▲	\blacktriangleup	\boxtop	\boxtop	\oslash	\oslash
\boxast	\boxasterisk	\boxtriangleup	\boxtriangleup	\otimes	\otimes
\boxbackslash	\boxbackslash	\boxvoid	\boxvoid	\otop	\otop
\boxbot	\boxbot	\boxcirc	\boxcirc	\otriangleup	\otriangleup
\boxcirc	\boxcirc	\boxbackslash	\boxbackslash	\ovoid	\ovoid
\boxcoasterisk	\boxcoasterisk	\boxbot	\boxbot	▼	\smalltriangledown
\boxdiv	\boxdiv	\boxcirc	\boxcirc	◀	\smalltriangleleft
\boxdot	\boxdot	\boxcoasterisk	\boxcoasterisk	▶	\smalltriangleright
\boxleft	\boxleft	\boxdiv	\boxdiv	▲	\smalltriangleup
\boxminus	\boxminus	\boxdot	\boxdot		
\boxplus	\boxplus	\boxleft	\boxleft		

TABLE 35: Variable-sized Math Operators

\bigcap	<code>\bigcap</code>	\bigotimes	<code>\bigotimes</code>	\bigwedge	<code>\bigwedge</code>	\prod	<code>\prod</code>	<code>\prod</code>
\bigcup	<code>\bigcup</code>	\bigsqcup	<code>\bigsqcup</code>	\coprod	<code>\coprod</code>	\sum	<code>\sum</code>	<code>\sum</code>
\bigodot	<code>\bigodot</code>	\biguplus	<code>\biguplus</code>	\int	<code>\int</code>			
\bigoplus	<code>\bigoplus</code>	\bigvee	<code>\bigvee</code>	\oint	<code>\oint</code>			

TABLE 36: \mathcal{AMS} Variable-sized Math Operators

$\int \cdots \int$	<code>\idotsint</code>	\iiint	<code>\iiint</code>	\iiint	<code>\iiint</code>
\iiint	<code>\iiiint</code>	\iint	<code>\iint</code>		

TABLE 37: `stmaryrd` Variable-sized Math Operators

\bigboxplus	<code>\bigboxplus</code>	\biginterleave	<code>\biginterleave</code>	\bigsqcap	<code>\bigsqcap</code>
\bigcurlyvee	<code>\bigcurlyvee</code>	\bigplus	<code>\bigplus</code>	\bigtriangledown	<code>\bigtriangledown</code>
\bigcurlywedge	<code>\bigcurlywedge</code>	\bigparallel	<code>\bigparallel</code>	\bigtriangleup	<code>\bigtriangleup</code>

TABLE 38: `wasysym` Variable-sized Math Operators

\iiint	<code>\iiint</code>	\oiint	<code>\oiint</code>	\varoiint	<code>\varoiint</code>
\iint	<code>\iint</code>	\varint	<code>\varint</code>		

TABLE 39: mathabx Variable-sized Math Operators

\curlyvee	<code>\bigcurlyvee</code>	\boxslash	<code>\bigboxslash</code>	\bigoplus	<code>\bigoright</code>
\sqcap	<code>\bigsqcap</code>	\boxtimes	<code>\bigboxtimes</code>	\bigoslash	<code>\bigoslash</code>
\curlywedge	<code>\bigcurlywedge</code>	\boxplus	<code>\bigboxplus</code>	\bigotimes	<code>\bigotimes</code>
\boxast	<code>\bigboxasterisk</code>	\boxtriangleup	<code>\bigboxtriangleup</code>	\bigtriangleup	<code>\bigtriangleup</code>
\boxbackslash	<code>\bigboxbackslash</code>	\boxvoid	<code>\bigboxvoid</code>	\bigcirc	<code>\bigovoid</code>
\boxbot	<code>\bigboxbot</code>	\complement	<code>\bigcomplement</code>	\bigplus	<code>\bigplus</code>
\boxcirc	<code>\bigboxcirc</code>	\bigcircast	<code>\bigcircasterisk</code>	\bigplus	<code>\bigsqplus</code>
\boxcoasterisk	<code>\bigboxcoasterisk</code>	\bigcircbackslash	<code>\bigcircbackslash</code>	\bigtimes	<code>\bigtimes</code>
\boxdiv	<code>\bigboxdiv</code>	\bigoplus	<code>\bigoplus</code>	\iiint	<code>\iiint</code>
\boxdot	<code>\bigboxdot</code>	\bigodot	<code>\bigodot</code>	\iint	<code>\iint</code>
\boxleft	<code>\bigboxleft</code>	\bigcircast	<code>\bigcirccoasterisk</code>	\int	<code>\int</code>
\boxminus	<code>\bigboxminus</code>	\bigodiv	<code>\bigodiv</code>	\oiint	<code>\oiint</code>
\boxplus	<code>\bigboxplus</code>	\bigoplus	<code>\bigoplus</code>	\oint	<code>\oint</code>
\boxright	<code>\bigboxright</code>	\bigominus	<code>\bigominus</code>		

TABLE 40: txfonts/pxfonts Variable-sized Math Operators

\boxplus	$\boxed{+}$	<code>\bigsqcapplus</code>	\oint	\oint	<code>\ointclockwise</code>
\boxplus	$\boxed{+}$	<code>\bigsqcupplus</code>	\oint	\oint	<code>\ointctrlockwise</code>
\int	\int	<code>\fint</code>	\int	\int	<code>\sqiiint</code>
$\int \cdots \int$	$\int \cdots \int$	<code>\idotsint</code>	\int	\int	<code>\sqiint</code>
\iiint	\iiint	<code>\iiiint</code>	\int	\int	<code>\sqint</code>
\iiint	\iiint	<code>\iiint</code>	\oint	\oint	<code>\varoiintclockwise</code>
\iint	\iint	<code>\iint</code>	\oint	\oint	<code>\varoiintctrlockwise</code>
\oint	\oint	<code>\oiintclockwise</code>	\oint	\oint	<code>\varoiintclockwise</code>
\oint	\oint	<code>\oiintctrlockwise</code>	\oint	\oint	<code>\varoiintctrlockwise</code>
\oint	\oint	<code>\oiint</code>	\oint	\oint	<code>\varointclockwise</code>
\oint	\oint	<code>\ointclockwise</code>	\oint	\oint	<code>\varointctrlockwise</code>
\oint	\oint	<code>\ointctrlockwise</code>	\times	\times	<code>\varprod</code>
\oint	\oint	<code>\oint</code>			

TABLE 41: esint Variable-sized Math Operators

$\int \cdots \int$	$\int \cdots \int$	<code>\dotsint</code>	\oint	\oint	<code>\ointclockwise</code>
\int	\int	<code>\fint</code>	\oint	\oint	<code>\ointctrlockwise</code>
\iiint	\iiint	<code>\iiiint</code>	\int	\int	<code>\sqint</code>
\iiint	\iiint	<code>\iiint</code>	\int	\int	<code>\sqint</code>
\iint	\iint	<code>\iint</code>	\oint	\oint	<code>\varoiint</code>
\int	\int	<code>\landdownint</code>	\oint	\oint	<code>\varointclockwise</code>
\int	\int	<code>\landupint</code>	\oint	\oint	<code>\varointctrlockwise</code>
\oint	\oint	<code>\oint</code>			

TABLE 42: Binary Relations

\approx	<code>\approx</code>	\equiv	<code>\equiv</code>	\perp	<code>\perp</code>	\smile	<code>\smile</code>
\frown	<code>\frown</code>	\smile	<code>\smile</code>	\prec	<code>\prec</code>	\succ	<code>\succ</code>
\bowtie	<code>\bowtie</code>	\Join	<code>\Join</code>	\preceq	<code>\preceq</code>	\succeq	<code>\succeq</code>
\cong	<code>\cong</code>	\mid	<code>\mid</code>	\propto	<code>\propto</code>	\vdash	<code>\vdash</code>
\dashv	<code>\dashv</code>	\models	<code>\models</code>	\sim	<code>\sim</code>		
\doteq	<code>\doteq</code>	\parallel	<code>\parallel</code>	\simeq	<code>\simeq</code>		

* Not predefined in L^AT_EX 2_ε. Use one of the packages latexsym, amsfonts, amssymb, mathabx, txfonts, pxfonts, or wasysym.

TABLE 43: \mathcal{AMS} Binary Relations

\approx	<code>\approxeq</code>	\equiv	<code>\eqcirc</code>	\succapprox	<code>\succapprox</code>
\backepsilon	<code>\backepsilon</code>	\fallingdotseq	<code>\fallingdotseq</code>	\succcurlyeq	<code>\succcurlyeq</code>
\backsimeq	<code>\backsimeq</code>	\multimap	<code>\multimap</code>	\succsim	<code>\succsim</code>
\backsimeq	<code>\backsimeq</code>	\pitchfork	<code>\pitchfork</code>	\therefore	<code>\therefore</code>
\because	<code>\because</code>	\precapprox	<code>\precapprox</code>	\thickapprox	<code>\thickapprox</code>
\between	<code>\between</code>	\preccurlyeq	<code>\preccurlyeq</code>	\thicksim	<code>\thicksim</code>
\bumpeq	<code>\bumpeq</code>	\precsim	<code>\precsim</code>	\varpropto	<code>\varpropto</code>
\bumpeq	<code>\bumpeq</code>	\risingdotseq	<code>\risingdotseq</code>	\Vdash	<code>\Vdash</code>
\circeq	<code>\circeq</code>	\shortmid	<code>\shortmid</code>	\vdash	<code>\vdash</code>
\curlyeqprec	<code>\curlyeqprec</code>	\shortparallel	<code>\shortparallel</code>	\Vdash	<code>\Vdash</code>
\curlyeqsucc	<code>\curlyeqsucc</code>	\smallfrown	<code>\smallfrown</code>		
\doteqdot	<code>\doteqdot</code>	\smallsmile	<code>\smallsmile</code>		

TABLE 44: \mathcal{AMS} Negated Binary Relations

\ncong	<code>\ncong</code>	\nshortparallel	<code>\nshortparallel</code>	\nVDash	<code>\nVDash</code>
\nmid	<code>\nmid</code>	\nsim	<code>\nsim</code>	\precnapprox	<code>\precnapprox</code>
\nparallel	<code>\nparallel</code>	\nsucc	<code>\nsucc</code>	\precnsim	<code>\precnsim</code>
\nprec	<code>\nprec</code>	\nsucceq	<code>\nsucceq</code>	\succnapprox	<code>\succnapprox</code>
\npreceq	<code>\npreceq</code>	\nVDash	<code>\nVDash</code>	\succnsim	<code>\succnsim</code>
\nshortmid	<code>\nshortmid</code>	\nvdash	<code>\nvdash</code>		

TABLE 45: stmaryrd Binary Relations

\in	<code>\inplus</code>	\ni	<code>\niplus</code>
-------	----------------------	-------	----------------------

TABLE 46: wasysym Binary Relations

\neg	<code>\invneg</code>	\leadsto	<code>\leadsto</code>	\propto	<code>\wasympropto</code>
\Join	<code>\Join</code>	\otimes	<code>\logof</code>		

TABLE 47: txfonts/pxfonts Binary Relations

\odot	<code>\circledgtr</code>	\ltimes	<code>\lJoin</code>	\times	<code>\opentimes</code>
\ominus	<code>\circledless</code>	\rtimes	<code>\lrtimes</code>	\perp	<code>\Perp</code>
\approx	<code>\colonapprox</code>	\multimap	<code>\multimap</code>	\preceq	<code>\preceqq</code>
\approx	<code>\Colonapprox</code>	\multimap	<code>\multimapboth</code>	\preceq	<code>\precneqq</code>
\coloneq	<code>\coloneq</code>	\multimap	<code>\multimapbothvert</code>	\Join	<code>\rJoin</code>
\coloneq	<code>\Coloneq</code>	\multimap	<code>\multimapdot</code>	\strictfi	<code>\strictfi</code>
\coloneqq	<code>\Coloneqq</code>	\multimap	<code>\multimapdotboth</code>	\strictif	<code>\strictif</code>
\coloneqq	<code>\coloneqq</code>	\multimap	<code>\multimapdotbothA</code>	\strictiff	<code>\strictiff</code>
\colonsim	<code>\Colonsim</code>	\multimap	<code>\multimapdotbothAvert</code>	\succeq	<code>\succeqq</code>
\colonsim	<code>\colonsim</code>	\multimap	<code>\multimapdotbothB</code>	\succeq	<code>\succneqq</code>
\Eqcolon	<code>\Eqcolon</code>	\multimap	<code>\multimapdotbothBvert</code>	\parallel	<code>\varparallel</code>
\eqcolon	<code>\eqcolon</code>	\multimap	<code>\multimapdotbothvert</code>	\parallel	<code>\varparallelinv</code>
\eqqcolon	<code>\eqqcolon</code>	\multimap	<code>\multimapdotinv</code>	\Vdash	<code>\Vdash</code>
\Eqqqcolon	<code>\Eqqqcolon</code>	\multimap	<code>\multimapinv</code>		
\eqsim	<code>\eqsim</code>	\times	<code>\openJoin</code>		

TABLE 48: txfonts/pxfonts Negated Binary Relations

\napprox	<code>\napprox</code>	\npreccurlyeq	<code>\npreccurlyeq</code>	\nthickapprox	<code>\nthickapprox</code>
\nasymp	<code>\nasymp</code>	\npreceq	<code>\npreceq</code>	\nrightarrow	<code>\ntwoheadleftarrow</code>
\nbacksim	<code>\nbacksim</code>	\nprec	<code>\nprec</code>	\nrightarrow	<code>\ntwoheadrightarrow</code>
\nbacksimeq	<code>\nbacksimeq</code>	\nsimeq	<code>\nsimeq</code>	\nvarparallel	<code>\nvarparallel</code>
\nbump	<code>\nbump</code>	\nsuccapprox	<code>\nsuccapprox</code>	\nvarparallelinv	<code>\nvarparallelinv</code>
\nbump	<code>\nBump</code>	\nsucccurlyeq	<code>\nsucccurlyeq</code>	\nVdash	<code>\nVdash</code>
\nequiv	<code>\nequiv</code>	\nsucceq	<code>\nsucceq</code>		
\nprecapprox	<code>\nprecapprox</code>	\nsuccsim	<code>\nsuccsim</code>		

TABLE 49: mathabx Binary Relations

\between	<code>\between</code>	\divides	<code>\divides</code>	\risingdotseq	<code>\risingdotseq</code>
\botdoteq	<code>\botdoteq</code>	\dotseq	<code>\dotseq</code>	\succapprox	<code>\succapprox</code>
\Bump	<code>\Bump</code>	\eqbumped	<code>\eqbumped</code>	\succcurlyeq	<code>\succcurlyeq</code>
\bump	<code>\bump</code>	\eqcirc	<code>\eqcirc</code>	\succdot	<code>\succdot</code>
\circeq	<code>\circeq</code>	\eqcolon	<code>\eqcolon</code>	\succsim	<code>\succsim</code>
\coloneq	<code>\coloneq</code>	\fallingdotseq	<code>\fallingdotseq</code>	\therefore	<code>\therefore</code>
\corresponds	<code>\corresponds</code>	\ggcurly	<code>\ggcurly</code>	\topdoteq	<code>\topdoteq</code>
\curlyeqprec	<code>\curlyeqprec</code>	\llcurly	<code>\llcurly</code>	\vdash	<code>\vdash</code>
\curlyeqsucc	<code>\curlyeqsucc</code>	\preccurlyeq	<code>\preccurlyeq</code>	\vdash	<code>\vdash</code>
\DashV	<code>\DashV</code>	\preccurlyeq	<code>\preccurlyeq</code>	\Vdash	<code>\Vdash</code>
\Dashv	<code>\Dashv</code>	\prec	<code>\prec</code>	\Vdash	<code>\Vdash</code>
\dashVv	<code>\dashVv</code>	\prec	<code>\prec</code>		

TABLE 50: `mathabx` Negated Binary Relations

\napprox	<code>\napprox</code>	\nperp	<code>\notperp</code>	\nvDash	<code>\nvDash</code>
\ncong	<code>\ncong</code>	\nprec	<code>\nprec</code>	\nVDash	<code>\nVDash</code>
\ncurlyeqprec	<code>\ncurlyeqprec</code>	\nprecapprox	<code>\nprecapprox</code>	\nVdash	<code>\nVdash</code>
\ncurlyeqsucc	<code>\ncurlyeqsucc</code>	\npreccurlyeq	<code>\npreccurlyeq</code>	\nvdash	<code>\nvdash</code>
\nDashv	<code>\nDashv</code>	\npreceq	<code>\npreceq</code>	\nVdash	<code>\nVdash</code>
\ndashV	<code>\ndashV</code>	\nprecsim	<code>\nprecsim</code>	\precnapprox	<code>\precnapprox</code>
\ndashv	<code>\ndashv</code>	\nsim	<code>\nsim</code>	\precneq	<code>\precneq</code>
\nDashV	<code>\nDashV</code>	\nsimeq	<code>\nsimeq</code>	\precnsim	<code>\precnsim</code>
\ndashVv	<code>\ndashVv</code>	\nsucc	<code>\nsucc</code>	\succnapprox	<code>\succnapprox</code>
\neq	<code>\neq</code>	\succapprox	<code>\succapprox</code>	\succneq	<code>\succneq</code>
\notasympt	<code>\notasympt</code>	\succcurlyeq	<code>\succcurlyeq</code>	\succnsim	<code>\succnsim</code>
\notdivides	<code>\notdivides</code>	\nsucceq	<code>\nsucceq</code>		
\notequiv	<code>\notequiv</code>	\succsim	<code>\succsim</code>		

The `\changenotsign` command toggles the behavior of `\not` to produce either a vertical or a diagonal slash through a binary operator. Thus, “`$a \not= b$`” can be made to produce either “ $a \nmid b$ ” or “ $a \neq b$ ”.

TABLE 51: trsym Binary Relations

	<code>\InversTransformHoriz</code>		<code>\TransformHoriz</code>
	<code>\InversTransformVert</code>		<code>\TransformVert</code>

TABLE 52: trfsigns Binary Relations









	<code>\dfourier</code>		<code>\Dfourier</code>
	<code>\fourier</code>		<code>\Fourier</code>
	<code>\laplace</code>		<code>\Laplace</code>
	<code>\ztransf</code>		<code>\Ztransf</code>

TABLE 53: Subset and Superset Relations

\sqsubset	<code>\sqsubset*</code>	\sqsupseteq	<code>\sqsupseteq</code>	\supset	<code>\supset</code>
\sqsubseteq	<code>\sqsubseteq</code>	\subset	<code>\subset</code>	\supseteq	<code>\supseteq</code>
\sqsupset	<code>\sqsupset*</code>	\subseteq	<code>\subseteq</code>		

* Not predefined in L^AT_EX 2_ε. Use one of the packages `latexsym`, `amsfonts`, `amssymb`, `mathabx`, `txfonts`, `pxfonts`, or `wasysym`.

TABLE 54: \mathcal{AMS} Subset and Superset Relations

$\not\subseteq$	<code>\nsubseteq</code>	\subseteq	<code>\subseteq</code>	\supsetneq	<code>\supsetneqq</code>
$\not\supseteq$	<code>\nsupseteq</code>	\subsetneq	<code>\subsetneqq</code>	\varsubsetneq	<code>\varsubsetneqq</code>
$\not\supseteqq$	<code>\nsupseteqq</code>	\subsetneqq	<code>\subsetneqq</code>	\varsubsetneqq	<code>\varsubsetneqq</code>
\sqsubset	<code>\sqsubset</code>	\supset	<code>\Supset</code>	\varsupseteq	<code>\varsupseteq</code>
\sqsupset	<code>\sqsupset</code>	\supseteqq	<code>\supseteqq</code>	\varsupseteqq	<code>\varsupseteqq</code>
\Subset	<code>\Subset</code>	\supsetneq	<code>\supsetneq</code>		

TABLE 55: `stmaryrd` Subset and Superset Relations

\oplus	<code>\subsetplus</code>	\oplus	<code>\supsetplus</code>
\oplus	<code>\subsetpluseq</code>	\oplus	<code>\supsetpluseq</code>

TABLE 56: `wasysym` Subset and Superset Relations

\sqsubset	<code>\sqsubset</code>	\sqsupset	<code>\sqsupset</code>
-------------	------------------------	-------------	------------------------

TABLE 57: `txfonts/pxfonts` Subset and Superset Relations

$\not\sqsubset$	<code>\nsqsubset</code>	$\not\sqsupseteq$	<code>\nsqsupseteq</code>	$\not\supset$	<code>\nSupset</code>
$\not\sqsubseteq$	<code>\nsqsubteq</code>	$\not\subseteq$	<code>\nSubset</code>		
$\not\supset$	<code>\nsqsupset</code>	$\not\supseteqq$	<code>\nsubseteqq</code>		

TABLE 58: `mathabx` Subset and Superset Relations

$\not\sqsubset$	<code>\nsqsubset</code>	$\not\supset$	<code>\nsupset</code>	\supseteq	<code>\supseteq</code>
$\not\sqsubseteq$	<code>\nsqSubset</code>	$\not\supseteq$	<code>\nSupset</code>	\supseteqq	<code>\supseteqq</code>
$\not\sqsupseteq$	<code>\nsqsubteq</code>	$\not\supseteqq$	<code>\nsupseteq</code>	\supsetneq	<code>\supsetneq</code>
$\not\sqsupseteqq$	<code>\nsqsubteqq</code>	$\not\supseteqqq$	<code>\nsupseteqq</code>	\supsetneqq	<code>\supsetneqq</code>
$\not\sqsupset$	<code>\nsqsupset</code>	\sqsubset	<code>\sqsubset</code>	\varsubsetneq	<code>\varsubsetneq</code>
$\not\sqsupseteq$	<code>\nsqSupset</code>	\sqsubseteq	<code>\sqSubset</code>	\varsubsetneqq	<code>\varsubsetneqq</code>
$\not\sqsupseteqq$	<code>\nsqsupseteq</code>	\sqsubseteq	<code>\sqsubteq</code>	\varsubsetneqq	<code>\varsubsetneqq</code>
$\not\sqsupseteqq$	<code>\nsqsupseteqq</code>	\sqsubseteq	<code>\sqsubteqq</code>	\varsubsetneqq	<code>\varsubsetneqq</code>
$\not\subset$	<code>\nsubset</code>	$\not\subsetneq$	<code>\nsubseteq</code>	\varsubsetneq	<code>\varsubsetneq</code>
$\not\Subset$	<code>\nSubset</code>	$\not\subsetneqq$	<code>\nsubseteqq</code>	\varsubsetneqq	<code>\varsubsetneqq</code>
$\not\supseteq$	<code>\nsupseteq</code>	\supseteq	<code>\sqSupset</code>	\supseteq	<code>\varsupseteq</code>
$\not\supseteqq$	<code>\nsupseteqq</code>	\supseteqq	<code>\Supset</code>	\supseteqq	<code>\varsupseteqq</code>

TABLE 59: Inequalities

\geq	<code>\geq</code>	\gg	<code>\gg</code>	\leq	<code>\leq</code>	\ll	<code>\ll</code>	\neq	<code>\neq</code>
--------	-------------------	-------	------------------	--------	-------------------	-------	------------------	--------	-------------------

TABLE 60: \mathcal{AMS} Inequalities

\gg	<code>\eqslantgtr</code>	\gtrless	\lneq
\lessgtr	<code>\eqslantless</code>	\gtrsim	\lneqq
\geq	<code>\geqq</code>	\gvertneqq	\lnsim
\geqslant	<code>\geqslant</code>	\leqq	\lvertneqq
\ggg	<code>\ggg</code>	\leqslant	\ngeq
\gapprox	<code>\gnapprox</code>	\lessapprox	\ngeqq
\gneq	<code>\gneq</code>	\lessdot	\ngeqslant
\gneqq	<code>\gneqq</code>	\lesseqgtr	\ngtr
\gnsim	<code>\gnsim</code>	\lesseqqgtr	\nleq
\gtrapprox	<code>\gtrapprox</code>	\lessgtr	\nleqq
\gtrdot	<code>\gtrdot</code>	\lesssim	\nleqslant
\gtreqless	<code>\gtreqless</code>	\lll	\nless
\gtreqqless	<code>\gtreqqless</code>	\lnapprox	

TABLE 61: wasysym Inequalities

\gtrsim	<code>\apprge</code>	\lesssim	<code>\apprl</code>
-----------	----------------------	------------	---------------------

TABLE 62: txfonts/pxfonts Inequalities

\ngg	<code>\ngg</code>	\ngtrsim	<code>\nlessim</code>
\ngtrapprox	<code>\ngtrapprox</code>	\nlessapprox	<code>\nll</code>
\ngtrless	<code>\ngtrless</code>	\nlessgtr	

TABLE 63: mathabx Inequalities

\gg	<code>\eqslantgtr</code>	\gtreqless	\lessssim	\ngtr
\lessgtr	<code>\eqslantless</code>	\gtreqqless	\lll	\ngtrapprox
\geq	<code>\geq</code>	\gtrless	\lll	\ngtrsim
\geqq	<code>\geqq</code>	\gtrsim	\lnapprox	\nleq
\gg	<code>\gg</code>	\gvertneqq	\lneq	\nleqq
\ggg	<code>\ggg</code>	\leq	\lneqq	\nless
\gapprox	<code>\gnapprox</code>	\leqq	\lnsim	\nlessapprox
\gneq	<code>\gneq</code>	\lessapprox	\lvertneqq	\nlesssim
\gneqq	<code>\gneqq</code>	\lessdot	\neqslantgtr	\nvareq
\gnsim	<code>\gnsim</code>	\lesseqgtr	\neqslantless	\nvarleq
\gtrapprox	<code>\gtrapprox</code>	\lesseqqgtr	\ngeq	\vareq
\gtrdot	<code>\gtrdot</code>	\lessgtr	\ngeqq	\varleq

`mathabx` defines `\leqslant` and `\le` as synonyms for `\leq`, `\geqslant` and `\ge` as synonyms for `\geq`, `\nleqslant` as a synonym for `\nleq`, and `\ngeqslant` as a synonym for `\ngeq`.

TABLE 64: \mathcal{AMS} Triangle Relations

◀	<code>\blacktriangleleft</code>	↯	<code>\ntrianglelefteq</code>	⊆	<code>\trianglelefteq</code>	◁	<code>\vartriangleleft</code>
▶	<code>\blacktriangleright</code>	↯	<code>\ntriangleright</code>	⊇	<code>\trianglerighteq</code>	▷	<code>\vartriangleright</code>
↯	<code>\ntriangleleft</code>	↯	<code>\ntrianglerighteq</code>	⊇	<code>\trianglerighteq</code>		

TABLE 65: `stmaryrd` Triangle Relations

⊆	<code>\trianglelefteqslant</code>	⊇	<code>\trianglerighteqslant</code>
↯	<code>\ntrianglelefteqslant</code>	↯	<code>\ntrianglerighteqslant</code>

TABLE 66: `mathabx` Triangle Relations

↯	<code>\ntriangleleft</code>	↯	<code>\ntrianglerighteq</code>	▷	<code>\triangleright</code>	▷	<code>\vartriangleright</code>
↯	<code>\ntrianglelefteq</code>	⊆	<code>\triangleleft</code>	⊇	<code>\trianglerighteq</code>		
↯	<code>\ntriangleright</code>	⊆	<code>\trianglelefteq</code>	⊆	<code>\vartriangleleft</code>		

TABLE 67: Arrows

↓	<code>\Downarrow</code>	←	<code>\longleftarrow</code>	↖	<code>\nwarrow</code>
↓	<code>\downarrow</code>	⇐	<code>\Longleftarrow</code>	⇒	<code>\rightarrow</code>
↩	<code>\hookleftarrow</code>	↔	<code>\longleftrightarrow</code>	→	<code>\rightarrow</code>
↪	<code>\hookrightarrow</code>	⇔	<code>\Longleftrightarrow</code>	↘	<code>\searrow</code>
↪	<code>\leadsto*</code>	↦	<code>\longmapsto</code>	↙	<code>\swarrow</code>
←	<code>\leftarrow</code>	⇒	<code>\Longrightarrow</code>	↑	<code>\uparrow</code>
⇐	<code>\Leftarrow</code>	→	<code>\longrightarrow</code>	↑	<code>\Uparrow</code>
↔	<code>\Leftrightarrow</code>	↦	<code>\mapsto</code>	↕	<code>\updownarrow</code>
↔	<code>\leftrightharpoonup</code>	↗	<code>\nearrow†</code>	↕	<code>\Updownarrow</code>

* Not predefined in $\text{\LaTeX} 2_{\epsilon}$. Use one of the packages `latexsym`, `amsfonts`, `amssymb`, `txfonts`, `pxfonts`, or `wasysym`.

† See the note beneath Table 112 for information about how to put a diagonal arrow across a mathematical expression (as in “ $\nabla \cdot \vec{B}$ ”).

TABLE 68: Harpoons

↵	<code>\leftharpoondown</code>	↘	<code>\rightharpoondown</code>	⇔	<code>\rightleftharpoons</code>
↶	<code>\leftharpoonup</code>	↗	<code>\rightharpoonup</code>		

TABLE 69: `textcomp` Text-mode Arrows

↓	<code>\textdownarrow</code>	→	<code>\textrightarrow</code>
←	<code>\textleftarrow</code>	↑	<code>\textuparrow</code>

TABLE 70: \mathcal{AMS} Arrows

\circlearrowleft	<code>\circlearrowleft</code>	\leftrightsquigarrow	<code>\leftrightsquigarrow</code>	\rightleftarrows	<code>\rightleftarrows</code>
\circlearrowright	<code>\circlearrowright</code>	\leftrightsquigarrow	<code>\leftrightsquigarrow</code>	\rightrightarrows	<code>\rightrightarrows</code>
\curvearrowleft	<code>\curvearrowleft</code>	\Lleftarrow	<code>\Lleftarrow</code>	\Rsh	<code>\Rsh</code>
\curvearrowright	<code>\curvearrowright</code>	\looparrowleft	<code>\looparrowleft</code>	\twoheadleftarrow	<code>\twoheadleftarrow</code>
\dashleftarrow	<code>\dashleftarrow</code>	\looparrowright	<code>\looparrowright</code>	\twoheadrightarrow	<code>\twoheadrightarrow</code>
\dashrightarrow	<code>\dashrightarrow</code>	\Lsh	<code>\Lsh</code>	\upuparrows	<code>\upuparrows</code>
\downdownarrows	<code>\downdownarrows</code>	\rightarrowtail	<code>\rightarrowtail</code>		
\leftarrowtail	<code>\leftarrowtail</code>				

TABLE 71: \mathcal{AMS} Negated Arrows

\nleftarrow	<code>\nleftarrow</code>	\nrightarrow	<code>\nrightarrow</code>	\nleftrightarrow	<code>\nleftrightarrow</code>
\nleftarrow	<code>\nleftarrow</code>	\nrightarrow	<code>\nrightarrow</code>	\nleftrightarrow	<code>\nleftrightarrow</code>

TABLE 72: \mathcal{AMS} Harpoons

\harpoonleft	<code>\downharpoonleft</code>	\harpoonright	<code>\upharpoonright</code>
\harpoonright	<code>\downharpoonright</code>	\harpoonleft	<code>\upharpoonleft</code>

TABLE 73: stmaryrd Arrows

\leftarrowtriangle	<code>\leftarrowtriangle</code>	\Mapsfrom	<code>\Mapsfrom</code>	\shortleftarrow	<code>\shortleftarrow</code>
\leftrightharpoonup	<code>\leftrightharpoonup</code>	\mapsfrom	<code>\mapsfrom</code>	\shortrightarrow	<code>\shortrightarrow</code>
$\leftrightharpoonuptriangle$	<code>\leftrightharpoonuptriangle</code>	\Mapsto	<code>\Mapsto</code>	\shortuparrow	<code>\shortuparrow</code>
\lightning	<code>\lightning</code>	\nrightarrow	<code>\nrightarrow</code>	\ssearrow	<code>\ssearrow</code>
\Longmapsfrom	<code>\Longmapsfrom</code>	\nnwarrow	<code>\nnwarrow</code>	\sswarrow	<code>\sswarrow</code>
\longmapsfrom	<code>\longmapsfrom</code>	\rightarrowtriangle	<code>\rightarrowtriangle</code>		
\Longmapsto	<code>\Longmapsto</code>	\shortdownarrow	<code>\shortdownarrow</code>		

TABLE 74: txfonts/pxfonts Arrows

\boxdotleft	<code>\boxdotleft</code>	\circleddotright	<code>\circleddotright</code>	\Diamondleft	<code>\Diamondleft</code>
\boxdotleft	<code>\boxdotleft</code>	\circleleft	<code>\circleleft</code>	\Diamondright	<code>\Diamondright</code>
\boxdotright	<code>\boxdotright</code>	\circcleright	<code>\circcleright</code>	\DiamondRight	<code>\DiamondRight</code>
\boxdotRight	<code>\boxdotRight</code>	\dashleftrightharpoonup	<code>\dashleftrightharpoonup</code>	\leftsquigarrow	<code>\leftsquigarrow</code>
\boxleft	<code>\boxleft</code>	\Diamonddotleft	<code>\Diamonddotleft</code>	\Nearrow	<code>\Nearrow</code>
\boxleft	<code>\boxleft</code>	\Diamonddotleft	<code>\Diamonddotleft</code>	\Nwarrow	<code>\Nwarrow</code>
\boxright	<code>\boxright</code>	\Diamonddotright	<code>\Diamonddotright</code>	\Rrightarrow	<code>\Rrightarrow</code>
\boxRight	<code>\boxRight</code>	\DiamonddotRight	<code>\DiamonddotRight</code>	\Searrow	<code>\Searrow</code>
\circleddotleft	<code>\circleddotleft</code>	\DiamondLeft	<code>\DiamondLeft</code>	\Swarrow	<code>\Swarrow</code>

TABLE 75: mathabx Arrows

	<code>\circlearrowleft</code>		<code>\leftarrow</code>		<code>\nwarrow</code>
	<code>\circlearrowright</code>		<code>\leftleftarrows</code>		<code>\restriction</code>
	<code>\curvearrowleft</code>		<code>\leftrightarrow</code>		<code>\rightarrow</code>
	<code>\curvearrowlefttright</code>		<code>\leftrightarrows</code>		<code>\rightleftarrows</code>
	<code>\curvearrowright</code>		<code>\leftrightsquigarrow</code>		<code>\rightrightarrows</code>
	<code>\curvearrowleft</code>		<code>\leftsquigarrow</code>		<code>\rightsquigarrow</code>
	<code>\curvearrowlefttright</code>		<code>\lefttorightarrow</code>		<code>\righttoleftarrow</code>
	<code>\curvearrowright</code>		<code>\looparrowdownleft</code>		<code>\Rsh</code>
	<code>\dlsh</code>		<code>\looparrowdownright</code>		<code>\searrow</code>
	<code>\downdownarrows</code>		<code>\looparrowleft</code>		<code>\swarrow</code>
	<code>\downtoupward</code>		<code>\looparrowright</code>		<code>\updownarrows</code>
	<code>\downuparrows</code>		<code>\Lsh</code>		<code>\uptodownarrow</code>
	<code>\drsh</code>		<code>\nearrow</code>		<code>\upuparrows</code>

TABLE 76: mathabx Negated Arrows

	<code>\nLeftarrow</code>		<code>\nleftrightarrow</code>		<code>\nrightarrow</code>
	<code>\nleftarrow</code>		<code>\nLeftrightarrow</code>		<code>\nRightarrow</code>

TABLE 77: mathabx Harpoons

	<code>\barleftarrow</code>		<code>\leftharpoonup</code>		<code>\rightleftharpoons</code>
	<code>\barrightarrow</code>		<code>\leftleftarpoons</code>		<code>\rightrightarpoons</code>
	<code>\downdownharpoons</code>		<code>\leftrightharpoon</code>		<code>\updownharpoons</code>
	<code>\downharpoonleft</code>		<code>\leftrightharpoons</code>		<code>\upharpoonleft</code>
	<code>\downharpoonright</code>		<code>\rightbarharpoon</code>		<code>\upharpoonright</code>
	<code>\downupharpoons</code>		<code>\rightharpoondown</code>		<code>\upupharpoons</code>
	<code>\leftbarharpoon</code>		<code>\rightharpoonup</code>		
	<code>\leftharpoondown</code>		<code>\rightleftharpoon</code>		

TABLE 78: chemarrow Arrows

	<code>\chemarrow</code>
--	-------------------------

TABLE 79: ulsy Contradiction Symbols

	<code>\blitza</code>		<code>\blitzb</code>		<code>\blitzc</code>		<code>\blitzd</code>		<code>\blitze</code>
--	----------------------	--	----------------------	--	----------------------	--	----------------------	--	----------------------

TABLE 80: Extension Characters

	<code>\relbar</code>		<code>\Relbar</code>
--	----------------------	--	----------------------

TABLE 81: stmaryrd Extension Characters

/	\Arrownot	†	\Mapsfromchar	‡	\Mapstochar
/	\arrownot	†	\mapsfromchar		

TABLE 82: txfonts/pxfonts Extension Characters

‡	\Mappedfromchar	#	\Mmappedfromchar	#	\Mmapstochar
‡	\mappedfromchar	#	\mmappedfromchar	#	\mmapstochar

TABLE 83: mathabx Extension Characters

†	\mapsfromchar	†	\mapstochar
†	\Mapsfromchar	†	\Mapstochar

TABLE 84: Log-like Symbols

\arccos	\cos	\csc	\exp	\ker	\limsup	\min	\sinh
\arcsin	\cosh	\deg	\gcd	\lg	\ln	\Pr	\sup
\arctan	\cot	\det	\hom	\lim	\log	\sec	\tan
\arg	\coth	\dim	\inf	\liminf	\max	\sin	\tanh

Calling the above “symbols” may be a bit misleading.¹ Each log-like symbol merely produces the eponymous textual equivalent, but with proper surrounding spacing. See Section 7.3 for more information about log-like symbols. As `\bmod` and `\pmod` are arguably not symbols we refer the reader to the Short Math Guide for L^AT_EX [Dow00] for samples.

TABLE 85: \mathcal{AMS} Log-like Symbols

\injlim	<code>\injlim</code>	\varinjlim	<code>\varinjlim</code>	\varinjlim	<code>\varlimsup</code>
\projlim	<code>\projlim</code>	\varprojlim	<code>\varprojlim</code>	\varprojlim	<code>\varprojlim</code>

Load the `amsmath` package to get these symbols. See Section 7.3 for some additional comments regarding log-like symbols. As `\mod` and `\pod` are arguably not symbols we refer the reader to the Short Math Guide for L^AT_EX [Dow00] for samples.

¹Michael J. Downes prefers the more general term, “atomic math objects”.

TABLE 86: Greek Letters

α	<code>\alpha</code>	θ	<code>\theta</code>	o	<code>o</code>	τ	<code>\tau</code>
β	<code>\beta</code>	ϑ	<code>\vartheta</code>	π	<code>\pi</code>	υ	<code>\upsilon</code>
γ	<code>\gamma</code>	ι	<code>\iota</code>	ϖ	<code>\varpi</code>	ϕ	<code>\phi</code>
δ	<code>\delta</code>	κ	<code>\kappa</code>	ρ	<code>\rho</code>	φ	<code>\varphi</code>
ϵ	<code>\epsilon</code>	λ	<code>\lambda</code>	ϱ	<code>\varrho</code>	χ	<code>\chi</code>
ε	<code>\varepsilon</code>	μ	<code>\mu</code>	σ	<code>\sigma</code>	ψ	<code>\psi</code>
ζ	<code>\zeta</code>	ν	<code>\nu</code>	ς	<code>\varsigma</code>	ω	<code>\omega</code>
η	<code>\eta</code>	ξ	<code>\xi</code>				
Γ	<code>\Gamma</code>	Λ	<code>\Lambda</code>	Σ	<code>\Sigma</code>	Ψ	<code>\Psi</code>
Δ	<code>\Delta</code>	Ξ	<code>\Xi</code>	Υ	<code>\Upsilon</code>	Ω	<code>\Omega</code>
Θ	<code>\Theta</code>	Π	<code>\Pi</code>	Φ	<code>\Phi</code>		

The remaining Greek majuscules can be produced with ordinary Latin letters. The symbol “M”, for instance, is used for both an uppercase “m” and an uppercase “μ”. See Section 7.4 for examples of how to produce bold Greek letters.

TABLE 87: \mathcal{AMS} Greek Letters

F `\digamma` \varkappa `\varkappa`

TABLE 88: txfonts/pxfonts Upright Greek Letters

α	<code>\alphaup</code>	θ	<code>\thetaup</code>	π	<code>\piup</code>	ϕ	<code>\phiup</code>
β	<code>\betaup</code>	ϑ	<code>\varthetaup</code>	ϖ	<code>\varpiup</code>	φ	<code>\varphiup</code>
γ	<code>\gammaup</code>	ι	<code>\iotaup</code>	ρ	<code>\rhoup</code>	χ	<code>\chiup</code>
δ	<code>\deltaup</code>	κ	<code>\kappaup</code>	ϱ	<code>\varrhoup</code>	ψ	<code>\psiup</code>
ϵ	<code>\epsilonup</code>	λ	<code>\lambdaup</code>	σ	<code>\sigmaup</code>	ω	<code>\omegaup</code>
ε	<code>\varepsilonup</code>	μ	<code>\muup</code>	ς	<code>\varsigmaup</code>		
ζ	<code>\zetaup</code>	ν	<code>\nuup</code>	τ	<code>\tauup</code>		
η	<code>\etaup</code>	ξ	<code>\xiup</code>	υ	<code>\upsilonup</code>		

TABLE 89: upgreek Upright Greek Letters

α	<code>\upalpha</code>	θ	<code>\upthetaeta</code>	π	<code>\uppi</code>	ϕ	<code>\upphi</code>
β	<code>\upbetaeta</code>	ϑ	<code>\upvarthetaeta</code>	ϖ	<code>\upvarpi</code>	φ	<code>\upvarphi</code>
γ	<code>\upgamma</code>	ι	<code>\upiota</code>	ρ	<code>\uprho</code>	χ	<code>\upchi</code>
δ	<code>\updelta</code>	κ	<code>\upkappa</code>	ρ	<code>\upvarrho</code>	ψ	<code>\uppsi</code>
ε	<code>\upepsilon</code>	λ	<code>\uplambda</code>	σ	<code>\upsigma</code>	ω	<code>\upomega</code>
ε	<code>\upvarepsilon</code>	μ	<code>\upmu</code>	σ	<code>\upvarsigma</code>		
ζ	<code>\upzeta</code>	ν	<code>\upnu</code>	τ	<code>\uptau</code>		
η	<code>\upeta</code>	ξ	<code>\upxi</code>	υ	<code>\upupsilon</code>		
Γ	<code>\Upgamma</code>	Λ	<code>\Uplambda</code>	Σ	<code>\Upsilon</code>	Ψ	<code>\Uppsi</code>
Δ	<code>\Updelta</code>	Ξ	<code>\Upxi</code>	Υ	<code>\Upupsilon</code>	Ω	<code>\Upomega</code>
Θ	<code>\Uptheta</code>	Π	<code>\Uppi</code>	Φ	<code>\Upphi</code>		

upgreek utilizes upright Greek characters from either the PostScript Symbol font (depicted above) or Euler Roman. As a result, the glyphs may appear slightly different from the above. Contrast, for example, “ $\Gamma\Delta\Theta\alpha\beta\gamma$ ” (Symbol) with “ $\Gamma\Delta\Theta\alpha\beta\gamma$ ” (Euler).

TABLE 90: txfonts/pxfonts Variant Latin Letters

g	<code>\varg</code>	v	<code>\varv</code>	w	<code>\varw</code>	y	<code>\vary</code>
-----	--------------------	-----	--------------------	-----	--------------------	-----	--------------------

Pass the `varg` option to txfonts/pxfonts to replace g , v , w , and y with g , v , w , and y in every mathematical expression in your document.

TABLE 91: \mathcal{AMS} Hebrew Letters

\beth	<code>\beth</code>	\gimel	<code>\gimel</code>	\daleth	<code>\daleth</code>
---------	--------------------	----------	---------------------	-----------	----------------------

\aleph appears in Table 125 on page 42.

TABLE 92: Letter-like Symbols

\bot	<code>\bot</code>	\forall	<code>\forall</code>	\imath	<code>\imath</code>	\ni	<code>\ni</code>	\top	<code>\top</code>
ℓ	<code>\ell</code>	\hbar	<code>\hbar</code>	\in	<code>\in</code>	∂	<code>\partial</code>	\wp	<code>\wp</code>
\exists	<code>\exists</code>	\Im	<code>\Im</code>	\jmath	<code>\jmath</code>	\Re	<code>\Re</code>		

TABLE 93: \mathcal{AMS} Letter-like Symbols

\Bbbk	<code>\Bbbk</code>	\complement	<code>\complement</code>	\hbar	<code>\hbar</code>
\textcircled{R}	<code>\textcircled{R}</code>	\Finv	<code>\Finv</code>	\hslash	<code>\hslash</code>
\textcircled{S}	<code>\textcircled{S}</code>	\Game	<code>\Game</code>	\nexists	<code>\nexists</code>

TABLE 94: txfonts/pxfonts Letter-like Symbols

\mathfrak{c} `\mathcent` \mathfrak{f} `\mathsterling` \notin `\notin` \notni `\notni`

TABLE 95: mathabx Letter-like Symbols

$\bar{\in}$	<code>\barin</code>	\in	<code>\in</code>	\nottop	<code>\nottop</code>	\varnotin	<code>\varnotin</code>
\complement	<code>\complement</code>	\nexists	<code>\nexists</code>	\owns	<code>\owns</code>	\varnotown	<code>\varnotown</code>
\exists	<code>\exists</code>	\notbot	<code>\notbot</code>	\ownsbar	<code>\ownsbar</code>		
\Finv	<code>\Finv</code>	\notin	<code>\notin</code>	∂	<code>\partial</code>		
\Game	<code>\Game</code>	\notowner	<code>\notowner</code>	\partialslash	<code>\partialslash</code>		

TABLE 96: trfsigns Letter-like Symbols

e `\e` j `\im`

TABLE 97: \mathcal{AMS} Delimiters

\ulcorner `\ulcorner` \urcorner `\urcorner`
 \llcorner `\llcorner` \lrcorner `\lrcorner`

TABLE 98: stmaryrd Delimiters

\Lbag	<code>\Lbag</code>	\Rbag	<code>\Rbag</code>	\lbag	<code>\lbag</code>	\rbag	<code>\rbag</code>
\llceil	<code>\llceil</code>	\rrceil	<code>\rrceil</code>	\llfloor	<code>\llfloor</code>	\rrfloor	<code>\rrfloor</code>
\llparenthesis	<code>\llparenthesis</code>	\rrparenthesis	<code>\rrparenthesis</code>				

TABLE 99: mathabx Delimiters

\lrcorner `\lrcorner` \rcorner `\rcorner`
 \ulcorner `\ulcorner` \urcorner `\urcorner`
 \llcorner `\llcorner` \lrcorner `\lrcorner`

TABLE 100: nath Delimiters

\L `\niv` \lrcorner `\vin`

TABLE 101: Variable-sized Delimiters

\downarrow	\Downarrow	<code>\downarrow</code>	\Downarrow	<code>\Downarrow</code>	$[$	$[$	$[$	$]$	$]$	$]$
\langle	\rangle	<code>\langle</code>	\rangle	<code>\rangle</code>	$ $	$ $	$ ^*$	$\ $	$\ $	<code>\ </code>
\lceil	\rceil	<code>\lceil</code>	\rceil	<code>\rceil</code>	\uparrow	\uparrow	<code>\uparrow</code>	\Uparrow	\Uparrow	<code>\Uparrow</code>
\lfloor	\rfloor	<code>\lfloor</code>	\rfloor	<code>\rfloor</code>	\updownarrow	\updownarrow	<code>\updownarrow</code>	\Updownarrow	\Updownarrow	<code>\Updownarrow</code>
$($	$)$	<code>(</code>	$)$	<code>)</code>	$\{$	$\{$	<code>\{</code>	$\}$	$\}$	<code>\}</code>
$/$	\backslash	<code>/</code>	\backslash	<code>\backslash</code>						

When used with `\left` and `\right`, these symbols expand to the height of the enclosed math expression. Note that `\vert` is a synonym for `|`, and `\Vert` is a synonym for `\|`.

* ε -TeX provides a `\middle` analogue to `\left` and `\right` that can be used to make an internal “|” (often used to indicate “evaluated at”) expand to the height of the surrounding `\left` and `\right` symbols. A similar effect can be achieved in conventional L^AT_EX using the `braket` package.

TABLE 102: Large, Variable-sized Delimiters

\int	\int	<code>\lmoustache</code>	\int	<code>\rmoustache</code>	$($	$($	<code>\lgroup</code>	$)$	$)$	<code>\rgroup</code>
$ $	$ $	<code>\arrowvert</code>	$\ $	<code>\Arrowvert</code>	$ $	$ $	<code>\bracevert</code>			

These symbols *must* be used with `\left` and `\right`. The `mathabx` package, however, redefines `\lgroup` and `\rgroup` so that those symbols can work without `\left` and `\right`.

TABLE 103: Variable-sized `stmaryrd` Delimiters

\llbracket	\llbracket	<code>\llbracket</code>	\rrbracket	<code>\rrbracket</code>
--------------	--------------	-------------------------	--------------	-------------------------

TABLE 104: `mathabx` Variable-sized Delimiters

\llbracket	\llbracket	<code>\lbbbrack</code>	\rrbracket	<code>\rbbbrack</code>
\lrcorner	\lrcorner	<code>\lfilet</code>	\rrcorner	<code>\rfilet</code>
$ $	$ $	<code>\thickvert</code>	$\ $	<code>\vvvert</code>

TABLE 105: `nath` Variable-sized Delimiters (Double)

$\langle\langle$	<code>\lAngle</code>	$\rangle\rangle$	<code>\rAngle</code>
\llbracket	<code>\lBrack</code>	\rrbracket	<code>\rBrack</code>
\lceil	<code>\lCeil</code>	\rceil	<code>\rCeil</code>
\lfloor	<code>\lFloor</code>	\rfloor	<code>\rFloor</code>
$\ $	<code>\lVert*</code>	$\ $	<code>\rVert*</code>

* `nath` redefines all of the above to include implicit `\left` and `\right` commands. Hence, separate `\lVert` and `\rVert` commands are needed to disambiguate whether “|” is a left or right delimiter.

All of the symbols in Table 105 can also be expressed using the `\double` macro. See the `nath` documentation for examples and additional information.

TABLE 106: `nath` Variable-sized Delimiters (Triple)

$\langle\langle\langle$	<code>\triple<</code>	$\rangle\rangle\rangle$	<code>\triple></code>
\lllbracket	<code>\triple[</code>	\rrrbracket	<code>\triple]</code>
\lllvert	<code>\ltriple *</code>	\rrrvert	<code>\rtriple *</code>

* Similar to `\lVert` and `\rVert` in Table 105, `\ltriple` and `\rtriple` must be used instead of `\triple` to disambiguate whether “|” is a left or right delimiter.

Note that `\triple`—and the corresponding `\double`—is actually a macro that takes a delimiter as an argument.

TABLE 107: `textcomp` Text-mode Delimiters

\langle	<code>\textlangle</code>	\rangle	<code>\textrangle</code>
\llbracket	<code>\textlbrackdbl</code>	\rrbracket	<code>\textrbrackdbl</code>
$\{$	<code>\textlquill</code>	$\}$	<code>\textrquill</code>

TABLE 108: Math-mode Accents

\acute{a}	<code>\acute{a}</code>	\check{a}	<code>\check{a}</code>	\grave{a}	<code>\grave{a}</code>	\tilde{a}	<code>\tilde{a}</code>
\bar{a}	<code>\bar{a}</code>	\ddot{a}	<code>\ddot{a}</code>	\hat{a}	<code>\hat{a}</code>	\vec{a}	<code>\vec{a}</code>
\breve{a}	<code>\breve{a}</code>	\dot{a}	<code>\dot{a}</code>	\mathring{a}	<code>\mathring{a}</code>		

Also note the existence of `\imath` and `\jmath`, which produce dotless versions of “*i*” and “*j*”. (See Table 125 on page 42.) These are useful when the accent is supposed to replace the dot. For example, “`\hat{\imath}`” produces a correct “*i*”, while “`\hat{i}`” would yield the rather odd-looking “*i*”.

TABLE 109: \mathcal{AMS} Math-mode Accents

\dddot{a}	<code>\dddot{a}</code>	\ddddot{a}	<code>\ddddot{a}</code>
-------------	------------------------	--------------	-------------------------

These accents are also provided by the `mathabx` package.

TABLE 110: `yhmath` Math-mode Accents

\mathring{a}	<code>\ring{a}</code>
----------------	-----------------------

This symbol is largely obsolete, as standard $\mathrm{L}^{\mathrm{A}}\mathrm{T}_{\mathrm{E}}\mathrm{X} 2_{\epsilon}$ has supported `\mathring` since June, 1998 [ET98].

TABLE 111: `trfsigns` Math-mode Accents

\overleftarrow{a}	<code>\dft{a}</code>	\overrightarrow{a}	<code>\DFT{a}</code>
---------------------	----------------------	----------------------	----------------------

The above are a sort of “reverse accent” in that the argument text serves as a subscript to the transform line.

TABLE 112: Extensible Accents

\widetilde{abc}	<code>\widetilde{abc}</code> *	\widehat{abc}	<code>\widehat{abc}</code> *
\overleftarrow{abc}	<code>\overleftarrow{abc}</code> †	\overrightarrow{abc}	<code>\overrightarrow{abc}</code> †
\overline{abc}	<code>\overline{abc}</code>	\underline{abc}	<code>\underline{abc}</code>
\overbrace{abc}	<code>\overbrace{abc}</code>	\underbrace{abc}	<code>\underbrace{abc}</code>
\sqrt{abc}	<code>\sqrt{abc}</code> ‡		

As demonstrated in a 1997 TUGboat article about typesetting long-division problems [Gib97], an extensible long-division sign (“ \overline{abc} ”) can be faked by putting a “`\big`” in a `tabular` environment with an `\hline` or `\cline` in the preceding row. The article also presents a piece of code that automatically solves and typesets—by putting an `\overline` atop “`\big`” and the desired text—long-division problems. See also the `polynom` package, which automatically solves and typesets polynomial-division problems in a similar manner.

* Made more extensible by the `yhmath` package.

† If you’re looking for an extensible *diagonal* line or arrow to be used for canceling or reducing mathematical subexpressions (e.g., “ $x + \cancel{-x}$ ” or “ $3 + 2 \cancel{-5}$ ”) then consider using the `cancel` package.

‡ With an optional argument, `\sqrt` typesets *nth* roots. For example, “`\sqrt[3]{abc}`” produces “ $\sqrt[3]{abc}$ ” and “`\sqrt[n]{abc}`” produces “ $\sqrt[n]{abc}$ ”.

TABLE 113: `\overrightarrow` Extensible Accents

\overrightarrow{abc}	<code>\overrightarrow{abc}</code>
------------------------	-----------------------------------

TABLE 114: `yhmath` Extensible Accents

\wideparen{abc}	<code>\wideparen{abc}</code>	$\widehat{\triangle}abc$	<code>\widehat{\triangle}abc</code>
$\widehat{\circ}abc$	<code>\widehat{\circ}abc</code>		

TABLE 115: \mathcal{AMS} Extensible Accents

\overleftrightarrow{abc}	<code>\overleftrightharpoon{abc}</code>	\overleftarrow{abc}	<code>\underleftrightharpoon{abc}</code>
\overleftarrow{abc}	<code>\underleftarrow{abc}</code>	\overrightarrow{abc}	<code>\underrightharpoon{abc}</code>

The following are a sort of “reverse accent” in that the argument text serves as a superscript to the arrow. In addition, the optional first argument (not shown) serves as a subscript to the arrow. See the Short Math Guide for L^AT_EX [Dow00] for further examples.

\overleftarrow{abc}	<code>\xleftarrow{abc}</code>	\overrightarrow{abc}	<code>\xrightarrow{abc}</code>
-----------------------	-------------------------------	------------------------	--------------------------------

TABLE 116: `chemarr` Extensible Accents

\overleftrightarrow{abc}	<code>\xrightleftharpoons{abc}</code>
----------------------------	---------------------------------------

`\xrightleftharpoons` is a sort of “reverse accent” in that the argument text serves as a superscript to the arrows. In addition, the optional first argument (not shown) serves as a subscript to the arrows.

TABLE 117: `chemarrow` Extensible Accents

\overleftarrow{abc} def	<code>\autoleftarrow{abc}{def}</code>	\overrightarrow{abc} def	<code>\autorightarrow{abc}{def}</code>
\overleftrightarrow{abc} def	<code>\autoleftrightharpoons{abc}{def}</code>	\overleftrightarrow{abc} def	<code>\autorightleftharpoons{abc}{def}</code>

These symbols are all “reverse accents” in that the two arguments serve, respectively, as a superscript and a subscript to the arrows.

In addition to the symbols shown above, `chemarrow` also provides `\larrowfill`, `\rarrowfill`, `\leftrightharpoonsfill`, and `\rightleftharpoonsfill` macros. Each of these takes a length argument and produces an arrow of the specified length.

TABLE 118: mathabx Extensible Accents

\overbrace{abc}	<code>\overbrace{abc}</code>	\overline{abc}	<code>\widebar{abc}</code>
\overgroup{abc}	<code>\overgroup{abc}</code>	\widetilde{abc}	<code>\widecheck{abc}</code>
\underbrace{abc}	<code>\underbrace{abc}</code>	\wideparen{abc}	<code>\wideparen{abc}</code>
\undergroup{abc}	<code>\undergroup{abc}</code>	\widehat{abc}	<code>\widering{abc}</code>
\overrightarrow{abc}	<code>\widearrow{abc}</code>		

The braces shown for `\overbrace` and `\underbrace` appear in their minimum size. They can expand arbitrarily wide, however.

TABLE 119: esvect Extensible Accents

\overrightarrow{abc}	<code>\vv{abc}</code> with package option a
\overrightarrow{abc}	<code>\vv{abc}</code> with package option b
\overrightarrow{abc}	<code>\vv{abc}</code> with package option c
\overrightarrow{abc}	<code>\vv{abc}</code> with package option d
\overrightarrow{abc}	<code>\vv{abc}</code> with package option e
\overrightarrow{abc}	<code>\vv{abc}</code> with package option f
\overrightarrow{abc}	<code>\vv{abc}</code> with package option g
\overrightarrow{abc}	<code>\vv{abc}</code> with package option h

`esvect` also defines a `\vv*` macro which is used to typeset arrows over vector variables with subscripts. See the `esvect` documentation for more information.

TABLE 120: undertilde Extensible Accents

$\underset{\sim}{abc}$	<code>\utilde{abc}</code>
------------------------	---------------------------

Because `\utilde` is based on `\widetilde` it is also made more extensible by the `yhmath` package.

TABLE 121: Dots

\cdot	<code>\cdotp</code>	$:$	<code>\colon*</code>	\cdot	<code>\ldotp</code>	\vdots	<code>\vdots^{\dagger}</code>
\cdots	<code>\cdots</code>	\ddots	<code>\ddots^{\dagger}</code>	\dots	<code>\ldots</code>		

* While “:” is valid in math mode, `\colon` uses different surrounding spacing. See Section 7.3 and the Short Math Guide for L^AT_EX [Dow00] for more information on math-mode spacing.

^{\dagger} The `mathdots` package redefines `\ddots` and `\vdots` to make them scale properly with font size. (They normally scale horizontally but not vertically.) `\fixedddots` and `\fixedvdots` provide the original, fixed-height functionality of L^AT_EX 2_ε’s `\ddots` and `\vdots` macros.

TABLE 122: \mathcal{AMS} Dots

\cdots	<code>\dotsb</code>	\cdots	<code>\dotsi</code>	\cdots	<code>\dotso</code>
\cdots	<code>\dotsc</code>	\cdots	<code>\dotsm</code>		

The \mathcal{AMS} dot symbols are named according to their intended usage: `\dotsb` between pairs of binary operators/relations, `\dotsc` between pairs of commas, `\dotsi` between pairs of integrals, `\dotsm` between pairs of multiplication signs, and `\dotso` between other symbol pairs.

TABLE 123: `mathdots` Dots

\ddots	<code>\iddots</code>
----------	----------------------

TABLE 124: `yhmath` Dots

\ddots	<code>\adots</code>
----------	---------------------

TABLE 125: Miscellaneous L^AT_EX 2_ε Symbols

\aleph	<code>\aleph</code>	\diamond	<code>\Diamond*</code>	∞	<code>\infty</code>	$'$	<code>\prime</code>
\angle	<code>\angle</code>	\diamond	<code>\diamondsuit</code>	\cup	<code>\mho*</code>	\sharp	<code>\sharp</code>
\backslash	<code>\backslash</code>	\emptyset	<code>\emptyset†</code>	∇	<code>\nabla</code>	\spadesuit	<code>\spadesuit</code>
\square	<code>\Box*,†</code>	\flat	<code>\flat</code>	\natural	<code>\natural</code>	\surd	<code>\surd</code>
\clubsuit	<code>\clubsuit</code>	\heartsuit	<code>\heartsuit</code>	\neg	<code>\neg</code>	\triangle	<code>\triangle</code>

* Not predefined in L^AT_EX 2_ε. Use one of the packages `latexsym`, `amsfonts`, `amssymb`, `txfonts`, `pxfonts`, or `wasysym`.

† To use `\Box`—or any other symbol—as an end-of-proof (Q.E.D.) marker, consider using the `ntheorem` package, which properly juxtaposes a symbol with the end of the proof text.

‡ Many people prefer the look of $\mathcal{A}\mathcal{M}\mathcal{S}$'s `\varnothing` (Table 126) to that of L^AT_EX's `\emptyset`.

TABLE 126: Miscellaneous $\mathcal{A}\mathcal{M}\mathcal{S}$ Symbols

\angle	<code>\angle</code>	\blacktriangledown	<code>\blacktriangledown</code>	\cup	<code>\mho</code>
\backprime	<code>\backprime</code>	\diagdown	<code>\diagdown</code>	\sphericalangle	<code>\sphericalangle</code>
\bigstar	<code>\bigstar</code>	\diagup	<code>\diagup</code>	\square	<code>\square</code>
\blacklozenge	<code>\blacklozenge</code>	\eth	<code>\eth</code>	\triangledown	<code>\triangledown</code>
\blacksquare	<code>\blacksquare</code>	\lozenge	<code>\lozenge</code>	\varnothing	<code>\varnothing</code>
\blacktriangle	<code>\blacktriangle</code>	\measuredangle	<code>\measuredangle</code>	\vartriangle	<code>\vartriangle</code>

TABLE 127: Miscellaneous wasysym Symbols

\square	<code>\Box</code>	\cup	<code>\mho*</code>	\therefore	<code>\wasymtherefore</code>
\diamond	<code>\Diamond</code>	\vartriangleleft	<code>\varangle</code>		

* `wasysym` also defines an `\agem0` symbol, which is the same glyph as `\mho` but is intended for use in text mode.

TABLE 128: Miscellaneous txfonts/pxfonts Symbols

\blacklozenge	<code>\Diamondblack</code>	λ	<code>\lambdaaslash</code>	\heartsuit	<code>\varheartsuit</code>
\diamond	<code>\Diamonddot</code>	\clubsuit	<code>\varclubsuit</code>	\spadesuit	<code>\varspadesuit</code>
λ	<code>\lambdabar</code>	\blacklozenge	<code>\vardiamondsuit</code>		

TABLE 129: Miscellaneous mathabx Symbols

\circ	<code>\degree</code>	fourth	<code>\fourth</code>	\measuredangle	<code>\measuredangle</code>	second	<code>\second</code>
\diagdown	<code>\diagdown</code>	$\#$	<code>\hash</code>	\pitchfork	<code>\pitchfork</code>	\sphericalangle	<code>\sphericalangle</code>
\diagup	<code>\diagup</code>	∞	<code>\infty</code>	\propto	<code>\propto</code>	third	<code>\third</code>
\oslash	<code>\diameter</code>	leftthreetimes	<code>\leftthreetimes</code>	rightthreetimes	<code>\rightthreetimes</code>	\varhash	<code>\varhash</code>

TABLE 130: Miscellaneous textcomp Text-mode Math Symbols

$^{\circ}$	<code>\textdegree*</code>	$\frac{1}{2}$	<code>\textonehalf[†]</code>	$\frac{3}{4}$	<code>\textthreequarters[†]</code>
\div	<code>\textdiv</code>	$\frac{1}{4}$	<code>\textonequarter[†]</code>	$\frac{3}{3}$	<code>\textthreesuperior</code>
$/$	<code>\textfractionsolidus</code>	1	<code>\textonesuperior</code>	\times	<code>\texttimes</code>
\neg	<code>\textlnot</code>	\pm	<code>\textpm</code>	2	<code>\texttwosuperior</code>
$-$	<code>\textminus</code>	$\sqrt{}$	<code>\textsurd</code>		

* If you prefer a larger degree symbol you might consider defining one as “`\ensuremath{\text{\char"00B0}}`” (“ \circ ”).

[†] `nicefrac` (part of the `units` package) can be used to construct vulgar fractions like “ $\frac{1}{2}$ ”, “ $\frac{1}{4}$ ”, “ $\frac{3}{4}$ ”, and even “ $\frac{c}{o}$ ”.

TABLE 131: mathcomp Math Symbols

$^{\circ}\text{C}$	<code>\tccentigrade</code>	Ω	<code>\tcohm</code>	‰	<code>\tcperthousand</code>
μ	<code>\tcmu</code>	‰‰	<code>\tcpertenthousand</code>		

TABLE 132: gensymb Symbols Defined to Work in Both Math and Text Mode

$^{\circ}\text{C}$	<code>\celsius</code>	μ	<code>\micro</code>	‰	<code>\perthousand</code>
$^{\circ}$	<code>\degree</code>	Ω	<code>\ohm</code>		

TABLE 133: mathabx Mayan Digits


	<code>\maya{0}</code>	:	<code>\maya{2}</code>	:	<code>\maya{4}</code>
.	<code>\maya{1}</code>	:	<code>\maya{3}</code>	:	<code>\maya{5}</code>

TABLE 134: marvosym Math Symbols

0	<code>\MVZero</code>	2	<code>\MVTwo</code>	4	<code>\MVFour</code>	6	<code>\MVSix</code>	8	<code>\MVEight</code>
1	<code>\MVOne</code>	3	<code>\MVThree</code>	5	<code>\MVFive</code>	7	<code>\MVSeven</code>	9	<code>\MVNine</code>
\angle	<code>\Anglesign</code>	\cdot	<code>\Squaredot</code>	$\vec{}$	<code>\Vectorarrowhigh</code>				
\cong	<code>\Corresponds</code>	\rightarrow	<code>\Vectorarrow</code>						

4 Science and technology symbols

This section lists symbols that are employed in various branches of science and engineering (and, because we were extremely liberal in our classification, astrology, too).

TABLE 136: wasysym Electrical and Physical Symbols



\sim `\AC` \approx `\VHF` $\sim\sim\sim$ `\photon` \approx `\HF` ∞ `\gluon`

TABLE 137: ifsym Pulse Diagram Symbols

\lrcorner `\FallingEdge` \llcorner `\LongPulseLow` \lrcorner `\PulseLow` \llcorner `\ShortPulseHigh`
 \llcorner `\LongPulseHigh` \lrcorner `\PulseHigh` \lrcorner `\RaisingEdge` \lrcorner `\ShortPulseLow`

In addition, within `\textifsym{...}`, the following codes are valid:

$_$ `l` $_$ `m` $_$ `h` $_$ `d` \langle `<` \rangle `>`
 $_$ `L` $_$ `M` $_$ `H` $_$ `D` \langle `<<` \rangle `>>`

This enables one to write “`\textifsym{mm<DDD>mm}`” to get “” or “`\textifsym{L|H|L|H|L}`” to get “”. See also the `timing` package, which provides a wide variety of pulse-diagram symbols within an environment designed specifically for typesetting pulse diagrams.






Finally, `\textifsym` supports the display of segmented digits, as would appear on an LCD: “`\textifsym{-123.456}`” produces “- ”. “`\textifsym{b}`” outputs a blank with the same width as an “**8**”.

TABLE 138: ar Aspect Ratio Symbol

\mathcal{R} `\AR`

TABLE 139: textcomp Text-mode Science and Engineering Symbols

$^{\circ}\text{C}$ `\textcelsius` $\text{\textcircled{U}}$ `\textmho` μ `\textmu` Ω `\textohm`

TABLE 140: wasysym Astronomical Symbols

Ω `\ascnode` $\♃$ `\jupiter` \bullet `\newmoon` $\♀$ `\venus`
 \odot `\astrosun` $\♁$ `\leftmoon` $\♄$ `\pluto` $\♅$ `\vernal`
 \oslash `\descnode` $\♂$ `\mars` $\♁$ `\rightmoon`
 $\♁$ `\earth` $\♂$ `\mercury` $\♄$ `\saturn`
 \bigcirc `\fullmoon` $\♆$ `\neptune` $\♅$ `\uranus`

TABLE 141: marvosym Astronomical Symbols

	<code>\Mercury</code>		<code>\Mars</code>		<code>\Uranus</code>		<code>\Sun</code>
	<code>\Venus</code>		<code>\Jupiter</code>		<code>\Neptune</code>		<code>\Moon</code>
	<code>\Earth</code>		<code>\Saturn</code>		<code>\Pluto</code>		

TABLE 142: mathabx Astronomical Symbols

	<code>\Mercury</code>		<code>\Earth</code>		<code>\Jupiter</code>		<code>\Uranus</code>		<code>\Pluto</code>
	<code>\Venus</code>		<code>\Mars</code>		<code>\Saturn</code>		<code>\Neptune</code>		
	<code>\fullmoon</code>		<code>\leftmoon</code>		<code>\newmoon</code>		<code>\rightmoon</code>		
	<code>\Sun</code>		<code>\varEarth</code>						

mathabx also defines `\girl` as an alias for `\Venus`, `\boy` as an alias for `\Mars`, and `\Moon` as an alias for `\leftmoon`.

TABLE 143: wasysym Astrological Symbols

	<code>\aries</code>		<code>\cancer</code>		<code>\libra</code>		<code>\capricornus</code>
	<code>\taurus</code>		<code>\leo</code>		<code>\scorpio</code>		<code>\aquarius</code>
	<code>\gemini</code>		<code>\virgo</code>		<code>\sagittarius</code>		<code>\pisces</code>
			<code>\conjunction</code>		<code>\opposition</code>		

TABLE 144: marvosym Astrological Symbols

	<code>\Aries</code>		<code>\Cancer</code>		<code>\Libra</code>		<code>\Capricorn</code>
	<code>\Taurus</code>		<code>\Leo</code>		<code>\Scorpio</code>		<code>\Aquarius</code>
	<code>\Gemini</code>		<code>\Virgo</code>		<code>\Sagittarius</code>		<code>\Pisces</code>

Note that `\Aries... \Pisces` can also be specified with `\Zodiac{1}... \Zodiac{12}`.

TABLE 145: mathabx Astrological Symbols

	<code>\Aries</code>		<code>\Taurus</code>		<code>\Gemini</code>
--	---------------------	--	----------------------	--	----------------------

TABLE 146: wasysym APL Symbols

	<code>\APLbox</code>		<code>\APLinv</code>		<code>\APLstar</code>
	<code>\APLcomment</code>		<code>\APLleftarrowbox</code>		<code>\APLup</code>
	<code>\APLdown</code>		<code>\APLlog</code>		<code>\APLuparrowbox</code>
	<code>\APLdownarrowbox</code>		<code>\APLminus</code>		<code>\notbackslash</code>
	<code>\APLinput</code>		<code>\APLrightarrowbox</code>		<code>\notslash</code>

TABLE 147: wasysym APL Modifiers

◦ \APLcirc{} ~ \APLnot{} | \APLvert{}

TABLE 148: marvosym Computer Hardware Symbols







 \ComputerMouse  \ParallelPort  \SerialInterface
 \Keyboard  \Printer  \SerialPort

TABLE 149: ascii Control Characters (IBM)

☉ \SOH	• \BEL	↵ \CR	!! \DCc	↓ \EM	▼ \US
⊕ \STX	■ \BS	⌘ \SO	⌘ \DCd	→ \SUB	\splitvert
♥ \ETX	○ \HT	✱ \SI	\$ \NAK	← \ESC	△ \DEL
♦ \EOT	◻ \LF	► \DLE	— \SYN	⌞ \FS	
♣ \ENQ	♂ \VT	◀ \DCa	‡ \ETB	↔ \GS	
♠ \ACK	♀ \FF	‡ \DCb	↑ \CAN	▲ \RS	

SOH, STX, ETX, ..., US are the names of ASCII characters 1–31. DEL is the name of ASCII character 127. \splitvert doesn't correspond to a control character but is merely the “|” character shown IBM style.

These characters must be entered with the `ascii` font in effect, for example, “{\ascii\STX}”. See the `ascii` package documentation for more information.

TABLE 150: marvosym Communication Symbols















 \Email  \fax  \Faxmachine  \Lightning  \Pickup
 \Emailct  \FAX  \Letter  \Mobilefone  \Telefon

TABLE 151: marvosym Engineering Symbols

 \Beam	↓ \Force	● \Octosteel	I \RoundedTTsteel
 \Bearing	● \Hexasteel	□ \Rectpipe	□ \Squarepipe
○ \Circpipe	↺ \Lefttorque	■ \Rectsteel	■ \Squaresteel
● \Circsteel	⇓ \Lineload	↻ \Righttorque	T \Tsteel
 \Fixedbearing	 \Loosebearing	T \RoundedLsteel*	I \TTsteel
— \Flatsteel	L \Lsteel	L \RoundedTsteel*	

*\RoundedLsteel and \RoundedTsteel seem to be swapped, at least in the 2000/05/01 version of marvosym.

TABLE 152: wasysym Biological Symbols

♀ \female ♂ \male

TABLE 153: marvosym Biological Symbols

♀	\Female	♀♂	\FemaleMale	♂	\MALE	○	\Neutral
♀	\FEMALE	♀	\Hermaphrodite	♂	\Male		
♀♀	\FemaleFemale	♀♂	\HERMAPHRODITE	♂♂	\MaleMale		

TABLE 154: marvosym Safety-related Symbols

☠	\Biohazard	☹	\CESign	☢	\Explosionsafe	☢	\Radioactivity
☯	\BSEfree	⚠	\Estatically	☞	\Laserbeam	⛔	\Stopsign

5 Dingbats

Dingbats are symbols such as stars, arrows, and geometric shapes. They are commonly used as bullets in itemized lists or, more generally, as a means to draw attention to the text that follows.

The `pifont` dingbat package warrants special mention. Among other capabilities, `pifont` provides a \LaTeX interface to the Zapf Dingbats font (one of the standard 35 PostScript fonts). However, rather than name each of the dingbats individually, `pifont` merely provides a single `\ding` command, which outputs the character that lies at a given position in the font. The consequence is that the `pifont` symbols can't be listed by name in this document's index, so be mindful of that fact when searching for a particular symbol.

TABLE 155: `bbding` Arrows






	<code>\ArrowBoldDownRight</code>		<code>\ArrowBoldRightShort</code>		<code>\ArrowBoldUpRight</code>
	<code>\ArrowBoldRightCircled</code>		<code>\ArrowBoldRightStrobe</code>		

TABLE 156: `pifont` Arrows











































	<code>\ding{212}</code>		<code>\ding{221}</code>		<code>\ding{230}</code>		<code>\ding{239}</code>		<code>\ding{249}</code>
	<code>\ding{213}</code>		<code>\ding{222}</code>		<code>\ding{231}</code>		<code>\ding{241}</code>		<code>\ding{250}</code>
	<code>\ding{214}</code>		<code>\ding{223}</code>		<code>\ding{232}</code>		<code>\ding{242}</code>		<code>\ding{251}</code>
	<code>\ding{215}</code>		<code>\ding{224}</code>		<code>\ding{233}</code>		<code>\ding{243}</code>		<code>\ding{252}</code>
	<code>\ding{216}</code>		<code>\ding{225}</code>		<code>\ding{234}</code>		<code>\ding{244}</code>		<code>\ding{253}</code>
	<code>\ding{217}</code>		<code>\ding{226}</code>		<code>\ding{235}</code>		<code>\ding{245}</code>		<code>\ding{254}</code>
	<code>\ding{218}</code>		<code>\ding{227}</code>		<code>\ding{236}</code>		<code>\ding{246}</code>		
	<code>\ding{219}</code>		<code>\ding{228}</code>		<code>\ding{237}</code>		<code>\ding{247}</code>		
	<code>\ding{220}</code>		<code>\ding{229}</code>		<code>\ding{238}</code>		<code>\ding{248}</code>		

TABLE 157: `marvosym` Scissors







	<code>\Cutleft</code>		<code>\Cutright</code>		<code>\Leftscissors</code>
	<code>\Cutline</code>		<code>\Kutline</code>		<code>\Rightscissors</code>

TABLE 158: `bbding` Scissors









	<code>\ScissorHollowLeft</code>		<code>\ScissorLeftBrokenTop</code>
	<code>\ScissorHollowRight</code>		<code>\ScissorRight</code>
	<code>\ScissorLeft</code>		<code>\ScissorRightBrokenBottom</code>
	<code>\ScissorLeftBrokenBottom</code>		<code>\ScissorRightBrokenTop</code>

TABLE 159: `pifont` Scissors

	<code>\ding{33}</code>		<code>\ding{34}</code>		<code>\ding{35}</code>		<code>\ding{36}</code>
---	------------------------	---	------------------------	---	------------------------	---	------------------------

TABLE 160: dingbat Pencils



	<code>\largepencil</code>		<code>\smallpencil</code>
---	---------------------------	---	---------------------------

TABLE 161: bbding Pencils and Nibs











	<code>\NibLeft</code>		<code>\PencilLeft</code>		<code>\PencilRightDown</code>
	<code>\NibRight</code>		<code>\PencilLeftDown</code>		<code>\PencilRightUp</code>
	<code>\NibSolidLeft</code>		<code>\PencilLeftUp</code>		
	<code>\NibSolidRight</code>		<code>\PencilRight</code>		

TABLE 162: pifont Pencils and Nibs






	<code>\ding{46}</code>		<code>\ding{47}</code>		<code>\ding{48}</code>		<code>\ding{49}</code>		<code>\ding{50}</code>
---	------------------------	---	------------------------	---	------------------------	---	------------------------	---	------------------------

TABLE 163: dingbat Hands








	<code>\leftpointright</code>		<code>\rightpointleft</code>		<code>\rightpointright</code>
	<code>\leftthumbsdown</code>		<code>\rightthumbsdown</code>		
	<code>\leftthumbsup</code>		<code>\rightthumbsup</code>		

TABLE 164: bbding Hands










	<code>\HandCuffLeft</code>		<code>\HandCuffRightUp</code>		<code>\HandPencilLeft</code>
	<code>\HandCuffLeftUp</code>		<code>\HandLeft</code>		<code>\HandRight</code>
	<code>\HandCuffRight</code>		<code>\HandLeftUp</code>		<code>\HandRightUp</code>

TABLE 165: pifont Hands





	<code>\ding{42}</code>		<code>\ding{43}</code>		<code>\ding{44}</code>		<code>\ding{45}</code>
---	------------------------	---	------------------------	---	------------------------	---	------------------------

TABLE 166: bbding Crosses and Plusses











	<code>\Cross</code>		<code>\CrossOpenShadow</code>		<code>\PlusOutline</code>
	<code>\CrossBoldOutline</code>		<code>\CrossOutline</code>		<code>\PlusThinCenterOpen</code>
	<code>\CrossClowerTips</code>		<code>\Plus</code>		
	<code>\CrossMaltese</code>		<code>\PlusCenterOpen</code>		

TABLE 167: pifont Crosses and Plusses

⦶	<code>\ding{57}</code>	⦶	<code>\ding{59}</code>	†	<code>\ding{61}</code>	†	<code>\ding{63}</code>
⦶	<code>\ding{58}</code>	⦶	<code>\ding{60}</code>	†	<code>\ding{62}</code>	⦶	<code>\ding{64}</code>

TABLE 168: bbding Xs and Check Marks

✓	<code>\Checkmark</code>	✕	<code>\XSolid</code>	✕	<code>\XSolidBrush</code>
✓	<code>\CheckmarkBold</code>	✕	<code>\XSolidBold</code>		

TABLE 169: pifont Xs and Check Marks

✓	<code>\ding{51}</code>	✕	<code>\ding{53}</code>	✕	<code>\ding{55}</code>
✓	<code>\ding{52}</code>	✕	<code>\ding{54}</code>	✕	<code>\ding{56}</code>

TABLE 170: wasysym Xs and Check Marks

☑	<code>\CheckedBox</code>	☐	<code>\Square</code>	☒	<code>\XBox</code>
---	--------------------------	---	----------------------	---	--------------------

TABLE 171: pifont Circled Numbers

①	<code>\ding{172}</code>	❶	<code>\ding{182}</code>	①	<code>\ding{192}</code>	❶	<code>\ding{202}</code>
②	<code>\ding{173}</code>	❷	<code>\ding{183}</code>	②	<code>\ding{193}</code>	❷	<code>\ding{203}</code>
③	<code>\ding{174}</code>	❸	<code>\ding{184}</code>	③	<code>\ding{194}</code>	❸	<code>\ding{204}</code>
④	<code>\ding{175}</code>	❹	<code>\ding{185}</code>	④	<code>\ding{195}</code>	❹	<code>\ding{205}</code>
⑤	<code>\ding{176}</code>	❺	<code>\ding{186}</code>	⑤	<code>\ding{196}</code>	❺	<code>\ding{206}</code>
⑥	<code>\ding{177}</code>	❻	<code>\ding{187}</code>	⑥	<code>\ding{197}</code>	❻	<code>\ding{207}</code>
⑦	<code>\ding{178}</code>	❼	<code>\ding{188}</code>	⑦	<code>\ding{198}</code>	❼	<code>\ding{208}</code>
⑧	<code>\ding{179}</code>	❽	<code>\ding{189}</code>	⑧	<code>\ding{199}</code>	❽	<code>\ding{209}</code>
⑨	<code>\ding{180}</code>	❾	<code>\ding{190}</code>	⑨	<code>\ding{200}</code>	❾	<code>\ding{210}</code>
⑩	<code>\ding{181}</code>	❿	<code>\ding{191}</code>	⑩	<code>\ding{201}</code>	❿	<code>\ding{211}</code>

pifont (part of the `psnfss` package) provides a `dingautolist` environment which resembles `enumerate` but uses circled numbers as bullets.² See the `psnfss` documentation for more information.

TABLE 172: wasysym Stars

☆	<code>\davidssstar</code>	✱	<code>\hexstar</code>	✱	<code>\varhexstar</code>
---	---------------------------	---	-----------------------	---	--------------------------

²In fact, `dingautolist` can use any set of consecutive Zapf Dingbats symbols.

TABLE 173: bbding Stars, Flowers, and Similar Shapes

	<code>\Asterisk</code>		<code>\FiveFlowerPetal</code>		<code>\JackStar</code>
	<code>\AsteriskBold</code>		<code>\FiveStar</code>		<code>\JackStarBold</code>
	<code>\AsteriskCenterOpen</code>		<code>\FiveStarCenterOpen</code>		<code>\SixFlowerAlternate</code>
	<code>\AsteriskRoundedEnds</code>		<code>\FiveStarConvex</code>		<code>\SixFlowerAltPetal</code>
	<code>\AsteriskThin</code>		<code>\FiveStarLines</code>		<code>\SixFlowerOpenCenter</code>
	<code>\AsteriskThinCenterOpen</code>		<code>\FiveStarOpen</code>		<code>\SixFlowerPetalDotted</code>
	<code>\DavidStar</code>		<code>\FiveStarOpenCircled</code>		<code>\SixFlowerPetalRemoved</code>
	<code>\DavidStarSolid</code>		<code>\FiveStarOpenDotted</code>		<code>\SixFlowerRemovedOpenPetal</code>
	<code>\EightAsterisk</code>		<code>\FiveStarOutline</code>		<code>\SixStar</code>
	<code>\EightFlowerPetal</code>		<code>\FiveStarOutlineHeavy</code>		<code>\SixteenStarLight</code>
	<code>\EightFlowerPetalRemoved</code>		<code>\FiveStarShadow</code>		<code>\Snowflake</code>
	<code>\EightStar</code>		<code>\FourAsterisk</code>		<code>\SnowflakeChevron</code>
	<code>\EightStarBold</code>		<code>\FourCloverOpen</code>		<code>\SnowflakeChevronBold</code>
	<code>\EightStarConvex</code>		<code>\FourCloverSolid</code>		<code>\Sparkle</code>
	<code>\EightStarTaper</code>		<code>\FourStar</code>		<code>\SparkleBold</code>
	<code>\FiveFlowerOpen</code>		<code>\FourStarOpen</code>		<code>\TwelveStar</code>

TABLE 174: pifont Stars, Flowers, and Similar Shapes

	<code>\ding{65}</code>		<code>\ding{74}</code>		<code>\ding{83}</code>		<code>\ding{92}</code>		<code>\ding{101}</code>
	<code>\ding{66}</code>		<code>\ding{75}</code>		<code>\ding{84}</code>		<code>\ding{93}</code>		<code>\ding{102}</code>
	<code>\ding{67}</code>		<code>\ding{76}</code>		<code>\ding{85}</code>		<code>\ding{94}</code>		<code>\ding{103}</code>
	<code>\ding{68}</code>		<code>\ding{77}</code>		<code>\ding{86}</code>		<code>\ding{95}</code>		<code>\ding{104}</code>
	<code>\ding{69}</code>		<code>\ding{78}</code>		<code>\ding{87}</code>		<code>\ding{96}</code>		<code>\ding{105}</code>
	<code>\ding{70}</code>		<code>\ding{79}</code>		<code>\ding{88}</code>		<code>\ding{97}</code>		<code>\ding{106}</code>
	<code>\ding{71}</code>		<code>\ding{80}</code>		<code>\ding{89}</code>		<code>\ding{98}</code>		<code>\ding{107}</code>
	<code>\ding{72}</code>		<code>\ding{81}</code>		<code>\ding{90}</code>		<code>\ding{99}</code>		
	<code>\ding{73}</code>		<code>\ding{82}</code>		<code>\ding{91}</code>		<code>\ding{100}</code>		

TABLE 175: wasysym Geometric Shapes

	<code>\hexagon</code>		<code>\octagon</code>		<code>\pentagon</code>		<code>\varhexagon</code>
--	-----------------------	--	-----------------------	--	------------------------	--	--------------------------

TABLE 176: ifsym Geometric Shapes

	<code>\BigCircle</code>		<code>\FilledBigTriangleRight</code>		<code>\SmallCircle</code>
	<code>\BigCross</code>		<code>\FilledBigTriangleUp</code>		<code>\SmallCross</code>
	<code>\BigDiamondshape</code>		<code>\FilledCircle</code>		<code>\SmallDiamondshape</code>
	<code>\BigHBar</code>		<code>\FilledDiamondShadowA</code>		<code>\SmallHBar</code>
	<code>\BigLowerDiamond</code>		<code>\FilledDiamondShadowC</code>		<code>\SmallLowerDiamond</code>
	<code>\BigRightDiamond</code>		<code>\FilledDiamondshape</code>		<code>\SmallRightDiamond</code>
	<code>\BigSquare</code>		<code>\FilledSmallCircle</code>		<code>\SmallSquare</code>
	<code>\BigTriangleDown</code>		<code>\FilledSmallDiamondshape</code>		<code>\SmallTriangleDown</code>
	<code>\BigTriangleLeft</code>		<code>\FilledSmallSquare</code>		<code>\SmallTriangleLeft</code>
	<code>\BigTriangleRight</code>		<code>\FilledSmallTriangleDown</code>		<code>\SmallTriangleRight</code>
	<code>\BigTriangleUp</code>		<code>\FilledSmallTriangleLeft</code>		<code>\SmallTriangleUp</code>
	<code>\BigVBar</code>		<code>\FilledSmallTriangleRight</code>		<code>\SmallVBar</code>
	<code>\Circle</code>		<code>\FilledSmallTriangleUp</code>		<code>\SpinDown</code>
	<code>\Cross</code>		<code>\FilledSquare</code>		<code>\SpinUp</code>
	<code>\DiamondShadowA</code>		<code>\FilledSquareShadowA</code>		<code>\Square</code>
	<code>\DiamondShadowB</code>		<code>\FilledSquareShadowC</code>		<code>\SquareShadowA</code>
	<code>\DiamondShadowC</code>		<code>\FilledTriangleDown</code>		<code>\SquareShadowB</code>
	<code>\Diamondshape</code>		<code>\FilledTriangleLeft</code>		<code>\SquareShadowC</code>
	<code>\FilledBigCircle</code>		<code>\FilledTriangleRight</code>		<code>\TriangleDown</code>
	<code>\FilledBigDiamondshape</code>		<code>\FilledTriangleUp</code>		<code>\TriangleLeft</code>
	<code>\FilledBigSquare</code>		<code>\HBar</code>		<code>\TriangleRight</code>
	<code>\FilledBigTriangleDown</code>		<code>\LowerDiamond</code>		<code>\TriangleUp</code>
	<code>\FilledBigTriangleLeft</code>		<code>\RightDiamond</code>		<code>\VBar</code>

The ifsym documentation points out that one can use `\rlap` to combine some of the above into useful, new symbols. For example, `\BigCircle` and `\FilledSmallCircle` combine to give “”. Likewise, `\Square` and `\Cross` combine to give “”. See Section 7.2 for more information about constructing new symbols out of existing symbols.

TABLE 177: bbding Geometric Shapes

	<code>\CircleShadow</code>		<code>\Rectangle</code>		<code>\SquareShadowTopLeft</code>
	<code>\CircleSolid</code>		<code>\RectangleBold</code>		<code>\SquareShadowTopRight</code>
	<code>\DiamondSolid</code>		<code>\RectangleThin</code>		<code>\SquareSolid</code>
	<code>\Ellipse</code>		<code>\Square</code>		<code>\TriangleDown</code>
	<code>\EllipseShadow</code>		<code>\SquareCastShadowBottomRight</code>		<code>\TriangleUp</code>
	<code>\EllipseSolid</code>		<code>\SquareCastShadowTopLeft</code>		
	<code>\HalfCircleLeft</code>		<code>\SquareCastShadowTopRight</code>		
	<code>\HalfCircleRight</code>		<code>\SquareShadowBottomRight</code>		




TABLE 178: pifont Geometric Shapes

●	<code>\ding{108}</code>	□	<code>\ding{111}</code>	□	<code>\ding{114}</code>	◆	<code>\ding{117}</code>	┆	<code>\ding{121}</code>
○	<code>\ding{109}</code>	□	<code>\ding{112}</code>	▲	<code>\ding{115}</code>	►	<code>\ding{119}</code>	■	<code>\ding{122}</code>
■	<code>\ding{110}</code>	□	<code>\ding{113}</code>	▼	<code>\ding{116}</code>		<code>\ding{120}</code>		

TABLE 179: universa Geometric Shapes

●	<code>\baucircle</code>	■	<code>\bausquare</code>	▲	<code>\bautriangle</code>
---	-------------------------	---	-------------------------	---	---------------------------

TABLE 180: manfnt Dangerous Bend Symbols

	<code>\dbend</code>		<code>\lhbend</code>		<code>\reversedvideobend</code>
---	---------------------	---	----------------------	---	---------------------------------

Note that these symbols descend far beneath the baseline. `manfnt` also defines non-descending versions, which it calls, correspondingly, `\textdbend`, `\textlhbend`, and `\textreversedvideobend`.

TABLE 181: skull Symbols


	<code>\skull</code>
---	---------------------

TABLE 182: Non-Mathematical mathabx Symbols

†	<code>\rip</code>
---	-------------------

TABLE 183: marvosym Information Symbols














	<code>\Bicycle</code>		<code>\Football</code>		<code>\Pointinghand</code>
	<code>\Checkedbox</code>		<code>\Gentsroom</code>		<code>\Wheelchair</code>
	<code>\Clocklogo</code>		<code>\Industry</code>		<code>\Writinghand</code>
	<code>\Coffeecup</code>		<code>\Info</code>		
	<code>\Crossedbox</code>		<code>\Ladiesroom</code>		

TABLE 184: Miscellaneous dingbat Dingbats
























	<code>\anchor</code>		<code>\eye</code>		<code>\Sborder</code>
	<code>\carriagereturn</code>		<code>\filledsquarewithdots</code>		<code>\squarewithdots</code>
	<code>\checkmark</code>		<code>\satellitedish</code>		<code>\Zborder</code>

TABLE 185: Miscellaneous bbding Dingbats

	<code>\Envelope</code>		<code>\Peace</code>		<code>\PhoneHandset</code>		<code>\SunshineOpenCircled</code>
	<code>\OrnamentDiamondSolid</code>		<code>\Phone</code>		<code>\Plane</code>		<code>\Tape</code>

TABLE 186: Miscellaneous pifont Dingbats

	<code>\ding{37}</code>		<code>\ding{40}</code>		<code>\ding{164}</code>		<code>\ding{167}</code>		<code>\ding{171}</code>
	<code>\ding{38}</code>		<code>\ding{41}</code>		<code>\ding{165}</code>		<code>\ding{168}</code>		<code>\ding{169}</code>
	<code>\ding{39}</code>		<code>\ding{118}</code>		<code>\ding{166}</code>		<code>\ding{170}</code>		

6 Other symbols

The following are all the symbols that didn't fit neatly or unambiguously into any of the previous sections. (Do weather symbols belong under "Science and technology"? Should dice be considered "mathematics"?) While some of the tables contain clearly related groups of symbols (e.g., musical notes), others represent motley assortments of whatever the font designer felt like drawing.

TABLE 187: textcomp Genealogical Symbols

★	<code>\textborn</code>	∘	<code>\textdivorced</code>	⊗	<code>\textmarried</code>
†	<code>\textdied</code>	☞	<code>\textleaf</code>		

TABLE 188: wasysym General Symbols

☒	<code>\ataribox</code>	⌚	<code>\clock</code>	◀	<code>\LEFTarrow</code>	☺	<code>\smiley</code>
🔔	<code>\bell</code>	∅	<code>\diameter</code>	⚡	<code>\lightning</code>	☼	<code>\sun</code>
☹	<code>\blacksmiley</code>	▼	<code>\DOWNarrow</code>	☎	<code>\phone</code>	▲	<code>\UParrow</code>
🎩	<code>\Bowtie</code>	☹	<code>\frownie</code>	☞	<code>\pointer</code>	⊠	<code>\wasylounge</code>
!	<code>\brokenvert</code>	⊗	<code>\invdiameter</code>	🎵	<code>\recorder</code>		
✓	<code>\checked</code>	✝	<code>\kreuz</code>	▶	<code>\RIGHTarrow</code>		

TABLE 189: wasysym Musical Notes

♪	<code>\eighthnote</code>	♪	<code>\halfnote</code>	♪	<code>\twonotes</code>	♪	<code>\fullnote</code>	♪	<code>\quarternote</code>
---	--------------------------	---	------------------------	---	------------------------	---	------------------------	---	---------------------------

See also `\flat`, `\sharp`, and `\natural` (Table 125 on page 42).

TABLE 190: wasysym Circles

●	<code>\CIRCLE</code>	◐	<code>\LEFTcircle</code>	◑	<code>\RIGHTcircle</code>	↻	<code>\rightturn</code>
○	<code>\Circle</code>	◑	<code>\Leftcircle</code>	◐	<code>\Rightcircle</code>		
◐	<code>\LEFTCIRCLE</code>	◑	<code>\RIGHTCIRCLE</code>	↻	<code>\leftturn</code>		

TABLE 191: Miscellaneous manfnt Symbols

☪	<code>\manboldkidney</code>	☪	<code>\manpenkidney</code>
◎	<code>\manconcentriccircles</code>	☸	<code>\manquadrifolium</code>
⬢	<code>\manconcentricdiamond</code>	↷	<code>\manquartercircle</code>
◊	<code>\mancone</code>	☸	<code>\manrotatedquadrifolium</code>
🎲	<code>\mancube</code>	↷	<code>\manrotatedquartercircle</code>
↗	<code>\manerrarrow</code>	☆	<code>\manstar</code>
◐	<code>\manfilledquartercircle</code>	↙	<code>\mantilt pennib</code>
—	<code>\manhpennib</code>	▼	<code>\mantriangledown</code>
🎲	<code>\manimpossiblecube</code>	▶	<code>\mantriangleright</code>
☪	<code>\mankidney</code>	▲	<code>\mantriangleup</code>
☪	<code>\manlhpenkidney</code>	⌋	<code>\manvpennib</code>

TABLE 192: marvosym Navigation Symbols

▶	\Forward	▼	\MoveDown	◀◀	\RewindToIndex	▲	\ToTop
▶▶	\ForwardToEnd	▲	\MoveUp	◀	\RewindToStart		
▶▶▶	\ForwardToIndex	◀	\Rewind	▼	\ToBottom		

TABLE 193: marvosym Laundry Symbols

	\AtForty		\Handwash		\ShortNinetyFive
	\AtNinetyFive		\IroningI		\ShortSixty
	\AtSixty		\IroningII		\ShortThirty
△	\Bleech		\IroningIII		\SpecialForty
Ⓐ	\CleaningA	⊗	\NoBleech	◻	\Tumbler
Ⓔ	\CleaningF	⊗	\NoChemicalCleaning		\WashCotton
Ⓕ	\CleaningFF		\NoIroning		\WashSynthetics
Ⓖ	\CleaningP	⊗	\NoTumbler		\WashWool
Ⓖ	\CleaningPP		\ShortFifty		
	\Dontwash		\ShortForty		

TABLE 194: Other marvosym Symbols






















†	\Ankh	†	\Cross	♥	\Heart	☺	\Smiley
	\Bat		\FHBologo		\MartinVogel		\Womanface
	\Bouquet		\FHBOLOGO		\Mundus	☯	\Yinyang
☩	\Celtcross	☹	\Frowny	@	\MVAt		
Ⓐ	\CircledA		\FullFHBO	→	\Rightarrow*		








* Standard L^AT_EX 2_ε defines \Rightarrow to display “⇒”, while marvosym redefines it to display “→” (or “:” in math mode). This conflict can be problematic for math symbols defined in terms of \Rightarrow, such as \Longlefttrightarrow, which ends up looking like “⇐:”.

TABLE 195: Miscellaneous universa Symbols

	\bauforms		\bauhead
--	-----------	--	----------

TABLE 196: ifsym Weather Symbols

	<code>\Cloud</code>		<code>\Hail</code>		<code>\Sleet</code>		<code>\WeakRain</code>
	<code>\FilledCloud</code>		<code>\HalfSun</code>		<code>\Snow</code>		<code>\WeakRainCloud</code>
	<code>\FilledRainCloud</code>		<code>\Lightning</code>		<code>\SnowCloud</code>		<code>\FilledSnowCloud</code>
	<code>\FilledSunCloud</code>		<code>\NoSun</code>		<code>\Sun</code>		
	<code>\FilledWeakRainCloud</code>		<code>\Rain</code>		<code>\SunCloud</code>		
	<code>\Fog</code>		<code>\RainCloud</code>		<code>\ThinFog</code>		

In addition, `\Thermo{0}... \Thermo{6}` produce thermometers that are between 0/6 and 6/6 full of mercury:       




Similarly, `\wind{<sun>}{<angle>}{<strength>}` will draw wind symbols with a given amount of sun (0–4), a given angle (in degrees), and a given strength in km/h (0–100). For example, `\wind{0}{0}{0}` produces “”, `\wind{2}{0}{0}` produces “”, and `\wind{4}{0}{100}` produces “”.

TABLE 197: ifsym Alpine Symbols

























	<code>\SummitSign</code>		<code>\Summit</code>		<code>\SurveySign</code>		<code>\HalfFilledHut</code>
	<code>\StoneMan</code>		<code>\Mountain</code>		<code>\Joch</code>		<code>\VarSummit</code>
	<code>\Hut</code>		<code>\IceMountain</code>		<code>\Flag</code>		
	<code>\FilledHut</code>		<code>\VarMountain</code>		<code>\VarFlag</code>		
	<code>\Village</code>		<code>\VarIceMountain</code>		<code>\Tent</code>		

TABLE 198: ifsym Clocks

	<code>\Interval</code>		<code>\StopWatchStart</code>		<code>\VarClock</code>		<code>\Wecker</code>
	<code>\StopWatchEnd</code>		<code>\Taschenuhr</code>		<code>\VarTaschenuhr</code>		


ifsym also exports a `\showclock` macro. `\showclock{<hours>}{<minutes>}` outputs a clock displaying the corresponding time. For instance, “`\showclock{5}{40}`” produces “”. `<hours>` must be an integer from 0 to 11, and `<minutes>` must be an integer multiple of 5 from 0 to 55.

TABLE 199: Other ifsym Symbols

	<code>\FilledSectioningDiamond</code>		<code>\Letter</code>		<code>\Radiation</code>
	<code>\Fire</code>		<code>\PaperLandscape</code>		<code>\SectioningDiamond</code>
	<code>\Irritant</code>		<code>\PaperPortrait</code>		<code>\Telephone</code>
	<code>\StrokeOne</code>		<code>\StrokeThree</code>		<code>\StrokeFive</code>
	<code>\StrokeTwo</code>		<code>\StrokeFour</code>		

In addition, `\Cube{1}...``\Cube{6}` produce dice with the corresponding number of spots:

TABLE 200: skak Chess Informator Symbols

	<code>\bbetter</code>		<code>\doublepawns</code>	N	<code>\novelty</code>	R	<code>\various</code>
	<code>\bdecisive</code>		<code>\ending</code>		<code>\onlymove</code>	\pm	<code>\wbetter</code>
	<code>\betteris</code>	=	<code>\equal</code>		<code>\opposbishops</code>	\pm	<code>\wdecisive</code>
	<code>\bishoppair</code>		<code>\etc</code>		<code>\passedpawn</code>		<code>\weakpt</code>
	<code>\bupperhand</code>	\Leftrightarrow	<code>\file</code>	\ll	<code>\qside</code>		<code>\with</code>
	<code>\centre</code>	\gg	<code>\kside</code>		<code>\samebishops</code>	\rightarrow	<code>\withattack</code>
RR	<code>\comment</code>		<code>\markera</code>	—	<code>\see</code>	\triangle	<code>\withidea</code>
	<code>\compensation</code>		<code>\markerb</code>	$\circ-\circ$	<code>\seppawns</code>	\uparrow	<code>\withininit</code>
	<code>\counterplay</code>	#	<code>\mate</code>	\oplus	<code>\timelimit</code>	\perp	<code>\without</code>
	<code>\devadvantage</code>	$>$	<code>\morepawns</code>	∞	<code>\unclear</code>	\pm	<code>\wupperhand</code>
	<code>\diagonal</code>	\bigcirc	<code>\moreroom</code>	∞	<code>\unitedpawns</code>	\odot	<code>\zugzwang</code>

The above symbols are merely the named informant symbol. `skak` can typeset many more chess-related symbols, including those for all of the pieces (/), but only in the context of moves and boards, not as individual, named L^AT_EX symbols.

7 Additional Information

Unlike the previous sections of this document, Section 7 does not contain new symbol tables. Rather, it provides additional help in using the Comprehensive L^AT_EX Symbol List. First, it draws attention to symbol names used by multiple packages. Next, it provides some guidelines for finding symbols and gives some examples regarding how to construct missing symbols out of existing ones. Then, it comments on the spacing surrounding symbols in math mode. After that, it presents an ASCII and Latin 1 quick-reference guide, showing how to enter all of the standard ASCII/Latin 1 symbols in L^AT_EX. And finally, it lists some statistics about this document itself.

7.1 Symbol Name Clashes

Unfortunately, a number of symbol names are not unique; they appear in more than one package. Depending on how the symbols are defined in each package, L^AT_EX will either output an error message or replace an earlier-defined symbol with a later-defined symbol. Table 201 presents a selection of name clashes that appear in this document.

Using multiple symbols with the same name in the same document—or even merely loading conflicting symbol packages—can be tricky, but, as evidenced by the existence of Table 201, not impossible. The general procedure is to load the first package, rename the conflicting symbols, and then load the second package. Examine the L^AT_EX source for this document (`symbols.tex`)—especially the `\savesymbol` and `\restoresymbol` macros and their subsequent usage—to see one possible way to handle symbol conflicts.

`txfonts` and `pxfonts` redefine a huge number of symbols—essentially, all of the symbols defined by `latexsym`, `textcomp`, the various \mathcal{MS} symbol sets, and L^AT_EX 2_ε itself. Similarly, `mathabx` redefines a vast number of math symbols in an attempt to improve their look. The `txfonts`, `pxfonts`, and `mathabx` conflicts are not listed in Table 201 because they are designed to be compatible with the symbols they replace. Table 202 on page 62 illustrates what “compatible” means in this context.

To use the new `txfonts`/`pxfonts` symbols without altering the document’s main font, merely reset the default font families back to their original values after loading one of those packages:

```
\renewcommand\rmdefault{cmr}
\renewcommand\sfddefault{cmss}
\renewcommand\ttdefault{cmtt}
```

7.2 Where can I find the symbol for ... ?

If you can’t find some symbol you’re looking for in this document, there are a few possible explanations:

- The symbol isn’t intuitively named. As a few examples, the command to draw dice is “`\Cube`”; a plus sign with a circle around it (“exclusive or” to computer engineers) is “`\oplus`”; and lightning bolts in fonts designed by German speakers may have “blitz” in their names. The moral of the story is to be creative with synonyms when searching the index.
- The symbol is defined by some package that I overlooked (or deemed unimportant). If there’s some symbol package that you think should be included in the Comprehensive L^AT_EX Symbol List, please send me e-mail at the address listed on the title page.
- The symbol isn’t defined in any package whatsoever.

Even in the last case, all is not lost. Sometimes, a symbol exists in a font, but there is no L^AT_EX binding for it. For example, the PostScript Symbol font contains a “`┘`” symbol, which may be useful for representing a carriage return, but there is no package for accessing that symbol (as far as I know). To produce an unnamed symbol, you need to switch to the font explicitly with L^AT_EX 2_ε’s low-level font commands [`\font`] and use T_EX’s primitive `\char` command [Knu86a] to request a specific character number in the font.³ In fact, `\char` is not strictly necessary; the character can often be entered symbolically. For example, the symbol for a Tate-Shafarevich group (“III”)

³`pifont` defines a convenient `\Pisymbol` command for accessing symbols in PostScript fonts by number. For example, “`\Pisymbol{psy}{191}`” produces “`┘`”.

TABLE 201: Symbol Name Clashes

Symbol	L ^A T _E X 2 _ε	<i>AMS</i>	stmaryrd	wasysym	mathabx	marvosym	bbding	ifsym	dingbat	wsuipa
<code>\baro</code>			ϕ							θ
<code>\bigtriangledown</code>	∇		\bigtriangledown							
<code>\bigtriangleup</code>	\triangle		\bigtriangleup							
<code>\checkmark</code>		✓							✓	
<code>\Circle</code>				○				○		
<code>\Cross</code>						†	†	×		
<code>\ggg</code>		»»			»					
<code>\Letter</code>						⊠		⊠		
<code>\lightning</code>			⚡	⚡						
<code>\Lightning</code>						⚡		⚡		
<code>\lll</code>		««			«					
<code>\Rightarrow</code>	\Rightarrow				\Rightarrow	\rightarrow				
<code>\Square</code>				□			□	□		
<code>\Sun</code>					☉	☉		☀		
<code>\TriangleDown</code>							▼	▽		
<code>\TriangleUp</code>							▲	△		

TABLE 202: Example of a Benign Name Clash

Symbol	Default (Computer Modern)	txfonts (Times Roman)
R	\mathbb{R}	\mathbb{R}
<code>\textrecipe</code>	$\mathbb{R}_{\mathfrak{c}}$	\mathbb{R}

is actually an uppercase *sha* in the Cyrillic alphabet. (Cyrillic is supported by the OT2 font encoding, for instance). While a *sha* can be defined numerically as “`\fontencoding{OT2}\selectfont\char88`” it may be more intuitive to use the OT2 font encoding’s “SH” ligature: “`\fontencoding{OT2}\selectfont SH`”.

Reflecting and rotating existing symbols

A common request on `comp.text.tex` is for a reversed or rotated version of an existing symbol. As a last resort, these effects can be achieved with the `graphicx` (or `graphics`) package’s `\reflectbox` and `\rotatebox` macros. For example, `\rotatebox[origin=c]{180}{\mathrel}` produces the definite-description operator (“ \mathrel ”). The disadvantage of the `graphicx/graphics` approach is that not every \TeX backend handles graphical transformations.⁴ Far better is to find a suitable font that contains the desired symbol in the correct orientation. For instance, if the `phonetic` package is available, then `\textit{\riota}` will yield a backend-independent “ \mathrel ”. Similarly, `tifa`’s `\textrepsilon` (“ \mathrel ”) or `wsuipa`’s `\revepsilon` (“ \mathrel ”) may be used to express the mathematical notion of “such that” in a cleaner manner than with `\reflectbox` or `\rotatebox`.

Joining and overlapping existing symbols

Symbols that do not exist in any font can sometimes be fabricated out of existing symbols. The \LaTeX 2_ε source file `fontdef.dtx` contains a number of such definitions. For example, `\models` (see Table 42 on page 23) is defined in that file with:

```
\def\models{\mathrel|\joinrel=}
```

where `\mathrel` and `\joinrel` are used to control the horizontal spacing. `\def` is the \TeX primitive upon which \LaTeX ’s `\newcommand` is based. See The \TeX book [Knu86a] for more information on all three of those commands.

With some simple pattern-matching, one can easily define a backward `\models` sign (“ \models ”):

```
\def\ismodeledby{=\joinrel\mathrel|}
```

In general, arrows/harpoons, horizontal lines (“ $=$ ”, “ $-$ ”, “ \relbar ”, and “ \Relbar ”), and the various math-extension characters can be combined creatively with miscellaneous other characters to produce a variety of new symbols. Of course, new symbols can be composed from *any* set of existing characters. For instance, \LaTeX defines `\hbar` (“ \hbar ”) as a “ $-$ ” character (`\mathchar'26`) followed by a backspace of 9 math units (`\mkern-9mu`), followed by the letter “ h ”:

```
\def\hbar{\mathchar'26\mkern-9mu h}
```

We can just as easily define other barred letters:

```
\def\bbar{\mathchar'26\mkern-9mu b}
\def\dbar{\mathchar'26\mkern-12mu d}
```

⁴As an example, `Xdvi` ignores both `\reflectbox` and `\rotatebox`.

(The space after the “mu” is optional but is added for clarity.) `\bbar` and `\dbar` define “ \bar{b} ” and “ \bar{d} ”, respectively. Note that `\dbar` requires a greater backward math kern than `\bbar`; a -9μ kern would have produced the less-attractive “ \bar{d} ” glyph.

There is a TeX primitive called `\mathaccent` which centers one mathematical symbol atop another. For example, one can define `\dotcup` (“ $\dot{\cup}$ ”)—the composition of a `\cup` and a `\cdot`—as follows:

```
\newcommand{\dotcup}{\ensuremath{\mathaccent\cdot\cup}}
```

The catch is that `\mathaccent` requires the accent to be a “math character”. That is, it must be a character in a math font as opposed to a symbol defined in terms of other symbols. See The TeXbook [Knu86a] for more information.

The `slashed` package, although originally designed for producing Feynman slashed-character notation, in fact facilitates the production of *arbitrary* overlapped symbols. The default behavior is to overwrite a given character with “/”. For example, `\slashed{D}` produces “ \not{D} ”. However, the `\declareslashed` command provides the flexibility to specify the mathematical context of the composite character (operator, relation, punctuation, etc., as will be discussed in Section 7.3), the overlapping symbol, horizontal and vertical adjustments in symbol-relative units, and the character to be overlapped. Consider, for example, the symbol for reduced quadrupole moment (“ f ”). This can be declared as follows:

```
\newcommand{\rqm}{\%
\declareslashed{\text{-}}{0.04}{0}{I}\slashed{I}}
```

`\declareslashed{\cdot}{\cdot}{\cdot}{\cdot}{I}` affects the meaning of all subsequent `\slashed{I}` commands in the same scope. The preceding definition of `\rqm` therefore uses an extra set of curly braces to limit that scope to a single `\slashed{I}`. In addition, `\rqm` uses amstext’s `\text` macro (described on the next page) to make `\declareslashed` use a text-mode hyphen (“-”) instead of a math-mode minus sign (“ $-$ ”) and to ensure that the hyphen scales properly in size in subscripts and superscripts. See `slashed`’s documentation (located in `slashed.sty` itself) for a detailed usage description of the `\slashed` and `\declareslashed` commands.

Making new symbols work in superscripts and subscripts

To make composite symbols work properly within subscripts and superscripts, you may need to use TeX’s `\mathchoice` primitive. `\mathchoice` evaluates one of four expressions, based on whether the current math style is display, text, script, or scriptscript. (See The TeXbook [Knu86a] for a more complete description.) For example, the following L^AT_EX code—posted to `comp.text.tex` by Torsten Bronger—composes a sub/superscriptable “ \top ” symbol out of `\top` and `\bot` (“ \top ” and “ \bot ”):

```
\def\topbotatom#1{\hbox{\hbox to 0pt{#1\bot$\hss}$#1\top$}}
\newcommand*\topbot{\mathrel{\mathchoice{\topbotatom\displaystyle}
{\topbotatom\textstyle}
{\topbotatom\scriptstyle}
{\topbotatom\scriptscriptstyle}}}
```

The following is another example that uses `\mathchoice` to construct symbols in different math modes. The code defines a principal value integral symbol, which is an integral sign with a line through it.

```
\def\Xint#1{\mathchoice
{\XXint\displaystyle\textstyle{#1}}%
{\XXint\textstyle\scriptstyle{#1}}%
{\XXint\scriptstyle\scriptscriptstyle{#1}}%
{\XXint\scriptscriptstyle\scriptscriptstyle{#1}}%
\!\int}
\def\XXint#1#2#3{\setbox0=\hbox{#1{#2#3}\int}$}
\vcenter{\hbox{#2#3}}\kern-.5\wd0}}
\def\ddashint{\Xint=}
\def\dashint{\Xint-}
```

(The preceding code was taken verbatim from the UK T_EX Users' Group FAQ at <http://www.tex.ac.uk/faq>.) `\dashint` produces a single-dashed integral sign (“ \int ”), while `\ddashint` produces a double-dashed one (“ $\!\!\!\int$ ”). The `\Xint` macro defined above can also be used to generate a wealth of new integrals: “ \oint ” (`\Xint\circlearrowright`), “ \ointleft ” (`\Xint\circlearrowleft`), “ \intsubset ” (`\Xint\subset`), “ \intinfty ” (`\Xint\infty`), and so forth.

L^AT_EX 2_ε provides a simple wrapper for `\mathchoice` that sometimes helps produce terser symbol definitions. The macro is called `\mathpalette` and it takes two arguments. `\mathpalette` invokes the first argument, passing it one of “`\displaystyle`”, “`\textstyle`”, “`\scriptstyle`”, or “`\scriptscriptstyle`”, followed by the second argument. `\mathpalette` is useful when a symbol macro must know which math style is currently in use (e.g., to set it explicitly within an `\mbox`). Donald Arseneau posted the following `\mathpalette`-based definition of a probabilistic-independence symbol (“ \perp ”) to `comp.text.tex`:

```
\newcommand\independent{\protect\mathpalette{\protect\independentT}\perp}
\def\independentT#1#2{\mathrel{\rlap{$\#1#2$}\mkern2mu{\#1#2}}}
```

The `\independent` macro uses `\mathpalette` to pass the `\independentT` helper macro both the current math style and the `\perp` symbol. `\independentT` typesets `\perp` in the current math style, moves two math units to the right, and finally typesets a second—overlapping—copy of `\perp`, again in the current math style. `\rlap`, which enables text overlap, is described later on this page.

Some people like their square-root signs with a trailing “hook” (i.e., “ $\sqrt{}$ ”) as this helps visually distinguish expressions like “ $\sqrt{3x}$ ” from those like “ $\sqrt{3}x$ ”. Dan Luecking posted a `\mathpalette`-based definition of a hooked square-root symbol to `comp.text.tex`:

```
\def\hksqrt{\mathpalette\DHLhksqrt}
\def\DHLhksqrt#1#2{\setbox0=\hbox{$\#1\sqrt{\#2\,}$}\dimen0=\ht0
\advance\dimen0-0.2\ht0
\setbox2=\hbox{\vrule height\ht0 depth-\dimen0}%
{\box0\lower0.4pt\box2}}
```

Notice how `\DHLhksqrt` uses `\mathpalette` to recover the outer math style (argument #1) from within an `\hbox`. The rest of the code is simply using T_EX primitives to position a hook of height 0.2 times the `\sqrt` height at the right of the `\sqrt`. See The T_EXbook [Knu86a] for more understanding of T_EX “boxes” and “dimens”.

Sometimes, however, `amstext`’s `\text` macro is all that is necessary to make composite symbols appear correctly in subscripts and superscripts, as in the following definitions of `\neswarrow` (“ \nearrow ”) and `\nwsearrow` (“ \nwarrow ”):⁵

```
\newcommand{\neswarrow}{\mathrel{\text{$\nearrow$\llap{$\swarrow$}}}}
\newcommand{\nwsearrow}{\mathrel{\text{$\nwarrow$\llap{$\searrow$}}}}
```

`\text` resembles L^AT_EX’s `\mbox` command but shrinks its argument appropriately when used within a subscript or superscript. `\llap` (“left overlap”) and its counterpart, `\rlap` (“right overlap”), appear frequently when creating composite characters. `\llap` outputs its argument to the left of the current position, overlapping whatever text is already there. Similarly, `\rlap` overlaps whatever text would normally appear to the right of its argument. For example, “`A\llap{B}`” and “`\rlap{A}B`” each produce “**B**”. However, the result of the former is the width of “A”, and the result of the latter is the width of “B”—`\llap{...}` and `\rlap{...}` take up zero space.

In a June 2002 post to `comp.text.tex`, Donald Arseneau presented a general macro for aligning an arbitrary number of symbols on their horizontal centers and vertical baselines:

```
\makeatletter
\def\overlay{\mathpalette\mov@rlay}
\def\mov@rlay#1#2{\leavevmode\vtop{%
\baselineskip\z@skip\lineskiplimit-\maxdimen
\ialign{\hfil$\#1##$\hfil\cr#2\crcr}}}
\makeatother
```

⁵Note that if your goal is to typeset commutative diagrams, then you should probably be using X_y-pic.

`\moverlay` takes a list of symbols separated by `\cr` (T_EX’s equivalent of L^AT_EX’s `\\`). For example, the `\topbot` command defined on page 63 could have been expressed as “`\moverlay{\top\cr\bot}`” and the `\neswarrow` command defined on the previous page could have been expressed as “`\moverlay{\nearrow\cr\swarrow}`”.

The basic concept behind `\moverlay`’s implementation is that `\moverlay` typesets the given symbols in a table that utilizes a zero `\baselineskip`. This causes every row to be typeset at the same vertical position. See The T_EXbook [Knu86a] for explanations of the T_EX primitives used by `\moverlay`.

Modifying L^AT_EX-generated symbols

Oftentimes, symbols composed in the L^AT_EX 2_ε source code can be modified with minimal effort to produce useful variations. For example, `fontdef.dtx` composes the `\ddots` symbol (see Table 121 on page 41) out of three periods, raised 7 pt., 4 pt., and 1 pt., respectively:

```
\def\ddots{\mathinner{\mkern1mu\raise7\p@
\ vbox{\kern7\p@\hbox{.}}\mkern2mu
\raise4\p@\hbox{.}}\mkern2mu\raise\p@\hbox{.}\mkern1mu}}
```

`\p@` is a L^AT_EX 2_ε shortcut for “pt” or “1.0pt”. The remaining commands are defined in The T_EXbook [Knu86a]. To draw a version of `\ddots` with the dots going along the opposite diagonal, we merely have to reorder the `\raise7\p@`, `\raise4\p@`, and `\raise\p@`:

```
\makeatletter
\def\revddots{\mathinner{\mkern1mu\raise\p@
\ vbox{\kern7\p@\hbox{.}}\mkern2mu
\raise4\p@\hbox{.}}\mkern2mu\raise7\p@\hbox{.}\mkern1mu}}
\makeatother
```

The `\makeatletter` and `\makeatother` commands are needed to coerce L^AT_EX into accepting “@” as part of a macro name. `\revddots` is essentially identical to the `mathdots` package’s `\iddots` command or the `yhmath` package’s `\adots` command.

Producing complex accents

Accents are a special case of combining existing symbols to make new symbols. While various tables in this document show how to add an accent to an existing symbol, some applications, such as transliterations from non-Latin alphabets, require *multiple* accents per character. For instance, the creator of pdfT_EX writes his name as “Hàn Thê Thành”. The `wsuipa` package defines `\diatop` and `\diaunder` macros for putting one or more diacritics or accents above or below a given character. For example, `\diaunder[\diatop[\textsubdot{r}]` produces “ $\dot{\ddot{r}}$ ”. See the `wsuipa` documentation for more information.

The `accents` package facilitates the fabrication of accents in math mode. Its `\accentset` command enables *any* character to be used as an accent. For instance, `\accentset{\star}{f}` produces “ $\overset{\star}{f}$ ” and `\accentset{e}{X}` produces “ $\overset{e}{X}$ ”. `\underaccent` does the same thing, but places the accent beneath the character. This enables constructs like `\underaccent{\tilde}{V}`, which produces “ $\underset{\sim}{V}$ ”. `accents` provides other accent-related features as well; see the documentation for more information.

A more complex example of composing accents is the following definition of extensible `\overbracket`, `\underbracket`, `\overparenthesis`, and `\underparenthesis` symbols, taken from a `comp.text.tex` post by Donald Arseneau:

```
\makeatletter
\def\overbracket#1{\mathop{\vbox{\ialign{##\crr\noalign{\kern3\p@
\downbracketfill\crr\noalign{\kern3\p@\nointerlineskip}
$\hfil\displaystyle{#1}\hfil$\crr}}}\limits}
\def\underbracket#1{\mathop{\vtop{\ialign{##\crr
$\hfil\displaystyle{#1}\hfil$\crr\noalign{\kern3\p@\nointerlineskip}
```

```

\upbracketfill\crcr\noalign{\kern3\p@}}}\limits}
\def\overparenthesis#1{\mathop{\vbox{\ialign{##\crcr\noalign{\kern3\p@}
\downparenthfill\crcr\noalign{\kern3\p@\nointerlineskip}
$\hfil\displaystyle{#1}\hfil$\crcr}}}\limits}
\def\underparenthesis#1{\mathop{\vtop{\ialign{##\crcr
$\hfil\displaystyle{#1}\hfil$\crcr\noalign{\kern3\p@\nointerlineskip}
\upparenthfill\crcr\noalign{\kern3\p@}}}\limits}
\def\downparenthfill{${\m@th\bracedl\leaders\vrule\hfill\bracerd$}
\def\upparenthfill{${\m@th\bracelu\leaders\vrule\hfill\braceru$}
\def\upbracketfill{${\m@th\makesm@sh{\llap{\vrule\@height3\p@\@width.7\p@}}%
\leaders\vrule\@height.7\p@\hfill
\makesm@sh{\rlap{\vrule\@height3\p@\@width.7\p@}}$}
\def\downbracketfill{${\m@th
\makesm@sh{\llap{\vrule\@height.7\p@\@depth2.3\p@\@width.7\p@}}%
\leaders\vrule\@height.7\p@\hfill
\makesm@sh{\rlap{\vrule\@height.7\p@\@depth2.3\p@\@width.7\p@}}$}
\makeatother

```

Table 203 showcases these accents. The `TEXbook` [Knu86a] or another book on T_EX primitives is indispensable for understanding how the preceding code works. The basic idea is that `\downparenthfill`, `\upparenthfill`, `\downbracketfill`, and `\upbracketfill` do all of the work; they output a left symbol (e.g., `\bracedl` [“ \lceil ”] for `\downparenthfill`), a horizontal rule that stretches as wide as possible, and a right symbol (e.g., `\bracerd` [“ \rceil ”] for `\downparenthfill`). `\overbracket`, `\underbracket`, `\overparenthesis`, and `\underparenthesis` merely create a table whose width is determined by the given text, thereby constraining the width of the horizontal rules.

TABLE 203: Manually Composed Extensible Accents

\overbrace{abc}	<code>\overbracket{abc}</code>	\overparen{abc}	<code>\overparenthesis{abc}</code>
\underbrace{abc}	<code>\underbracket{abc}</code>	\underparen{abc}	<code>\underparenthesis{abc}</code>

A similar, but simpler example, stems from another `comp.text.tex` post by Donald Arseneau. The following code defines an equals sign that extends as far to the right as possible (just like L^AT_EX’s `\hrulefill` command):

```

\makeatletter
\def\equalsfill{${\m@th\mathord=\mkern-7mu
\cleaders\hbox{${\!\!\mathord=\!}$}\hfill
\mkern-7mu\mathord=$}
\makeatother

```

T_EX’s `\cleaders` and `\hfill` primitives are the key to understanding `\equalsfill`’s extensibility. Essentially, `\equalsfill` repeats a box containing “=” plus some negative space until it fills the maximum available horizontal space. `\equalsfill` is intended to be used with L^AT_EX’s `\stackrel` command, which stacks one mathematical expression (slightly reduced in size) atop another. Hence, “`\stackrel{a}{\rightarrow}`” produces “ \xrightarrow{a} ” and “`\stackrel{\text{definition}}{X \stackrel{\text{definition}}{=} Y}`” produces “ $X \stackrel{\text{definition}}{=} Y$ ”.

If all that needs to extend are horizontal and vertical lines—as opposed to repeated symbols such as the “=” in the previous example—L^AT_EX’s `array` or `tabular` environments may suffice. Consider the following code (also presented in a `comp.text.tex` post by Donald Arseneau) for typesetting annuities:

```

\DeclareRobustCommand{\annu}[1]{_{\%
\def\arraystretch{0}%
\setlength\arraycolsep{1pt}%          adjust these
\setlength\arrayrulewidth{.2pt}%    two settings

```

```

\begin{array}[b]{@{}c|}\hline
\\[\arraycolsep]%
\scriptstyle #1%
\end{array}%
}}

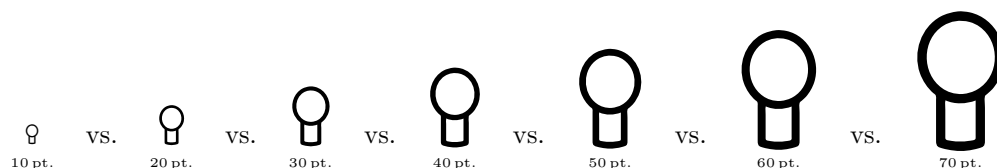
```

One can then use, e.g., “ $\$A\backslash\text{annu}\{x:n\}\$$ ” to produce “ $A_{\overline{x:n}}$ ”.

Creating new symbols from scratch

Sometimes it is simply not possible to define a new symbol in terms of existing symbols. Fortunately, most, if not all, \TeX distributions are shipped with a tool called METAFONT which is designed specifically for creating fonts to be used with \TeX . The METAFONTbook [Knu86b] is the authoritative text on METAFONT. If you plan to design your own symbols with METAFONT, The METAFONTbook is essential reading. Nevertheless, the following is an extremely brief tutorial on how to create a new \LaTeX symbol using METAFONT. Its primary purpose is to cover the \LaTeX -specific operations not mentioned in The METAFONTbook and to demonstrate that symbol-font creation is not necessarily a difficult task.

Suppose we need a symbol to represent a light bulb (“ \mathcal{Q} ”).⁶ The first step is to draw this in METAFONT. It is common to separate the font into two files: a size-dependent file, which specifies the design size and various font-specific parameters that are a function of the design size; and a size-independent file, which draws characters in the given size. Figure 1 shows the METAFONT code for `lightbulb10.mf`. `lightbulb10.mf` specifies various parameters that produce a 10 pt. light bulb then loads `lightbulb.mf`. Ideally, one should produce `lightbulb<size>.mf` files for a variety of $\langle size \rangle$ s. This is called “optical scaling”. It enables, for example, the lines that make up the light bulb to retain the same thickness at different font sizes, which looks much nicer than the alternative—and default—“mechanical scaling”. When a `lightbulb<size>.mf` file does not exist for a given size $\langle size \rangle$, the computer mechanically produces a wider, taller, thicker symbol:



<code>font_identifier := "LightBulb10";</code>	% Name the font.
<code>font_size 10pt#;</code>	% Specify the design size.
<code>em# := 10pt#;</code>	% “M” width is 10 points.
<code>cap# := 7pt#;</code>	% Capital letter height is 7 points above the baseline.
<code>sb# := 1/4pt#;</code>	% Leave this much space on the side of each character.
<code>o# := 1/16pt#;</code>	% Amount that curves overshoot borders.
<code>input lightbulb</code>	% Load the file that draws the actual glyph.

Figure 1: Sample METAFONT size-specific file (`lightbulb10.mf`)

`lightbulb.mf`, shown in Figure 2, draws a light bulb using the parameters defined in `lightbulb10.mf`. Note that the the filenames “`lightbulb10.mf`” and “`lightbulb.mf`” do not follow the Berry font-naming scheme [Ber01]; the Berry font-naming scheme is largely irrelevant for symbol fonts, which generally lack bold, italic, small-caps, slanted, and other such variants.

The code in Figures 1 and 2 is heavily commented and should demonstrate some of the basic concepts behind METAFONT usage: declaring variables, defining points, drawing lines and curves, and preparing to debug or fine-tune the output. Again, The METAFONTbook [Knu86b] is the definitive reference on METAFONT programming.

⁶I’m not a very good artist; you’ll have to pretend that “ \mathcal{Q} ” looks like a light bulb.

```

mode_setup; % Target a given printer.
define_pixels(em, cap, sb); % Convert to device-specific units.
define_corrected_pixels(o); % Same, but add a device-specific fudge factor.

%% Define a light bulb at the character position for "A"
%% with width 1/2em#, height cap#, and depth 1pt#.
beginchar("A", 1/2em#, cap#, 1pt#); "A light bulb";
    pickup pencircle scaled 1/2pt; % Use a pen with a small, circular tip.

    %% Define the points we need.
    top z1 = (w/2, h + o); % z1 is at the top of a circle.
    rt z2 = (w + sb + o - x4, y4); % z2 is at the same height as z4 but the opposite side.
    bot z3 = (z1 - (0, w - sb - o)); % z3 is at the bottom of the circle.
    lft z4 = (sb - o, 1/2[y1, y3]); % z4 is on the left of the circle.
    path bulb; % Define a path for the bulb itself.
    bulb = z1 .. z2 .. z3 .. z4 .. cycle; % The bulb is a closed path.

    z5 = point 2 - 1/3 of bulb; % z5 lies on the bulb, a little to the right of z3.
    z6 = (x5, 0); % z6 is at the bottom, directly under z5.
    z7 = (x8, 0); % z7 is at the bottom, directly under z8.
    z8 = point 2 + 1/3 of bulb; % z8 lies on the bulb, a little to the left of z3.
    bot z67 = (1/2[x6, x7], pen_bot - o - 1/8pt); % z67 lies halfway between z6 and z7 but a jot lower.

    %% Draw the bulb and the base.
    draw bulb; % Draw the bulb proper.
    draw z5 -- z6 .. z67 .. z7 -- z8; % Draw the base of the bulb.

    %% Display key positions and points to help us debug.
    makegrid(0, sb, w/2, w - sb)(0, -1pt, y2, h); % Label "interesting" x and y coordinates.
    penlabels(1, 2, 3, 4, 5, 6, 67, 7, 8); % Label control points for debugging.
endchar;
end

```

Figure 2: Sample METAFONT size-independent file (`lightbulb.mf`)

METAFONT can produce “proofs” of fonts—large, labeled versions that showcase the logical structure of each character. In fact, proof mode is METAFONT’s default mode. To produce a proof of `lightbulb10.mf`, issue the following commands at the operating-system prompt:

```

prompt> mf lightbulb10.mf          ⇐ Produces lightbulb10.2602gf
prompt> gftodvi lightbulb10.2602gf ⇐ Produces lightbulb10.dvi

```

You can then view `lightbulb10.dvi` with any DVI viewer. The result is shown in Figure 3. Observe how the grid defined with `makegrid` at the bottom of Figure 2 draws vertical lines at positions 0, `sb`, `w/2`, and `w - sb` and horizontal lines at positions 0, `-1pt`, `y2`, and `h`. Similarly, observe how the `penlabels` command labels all of the important coordinates: z_1, z_2, \dots, z_8 and z_{67} , which `lightbulb.mf` defines to lie between z_6 and z_7 .

Most, if not all, TeX distributions include a Plain TeX file called `testfont.tex` which is useful for testing new fonts in a variety of ways. One useful routine produces a table of all of the characters in the font:

```

prompt> tex testfont
This is TeX, Version 3.14159 (Web2C 7.3.1)
(/usr/share/texmf/tex/plain/base/testfont.tex
Name of the font to test = lightbulb10
Now type a test command (\help for help):)
*\table

```

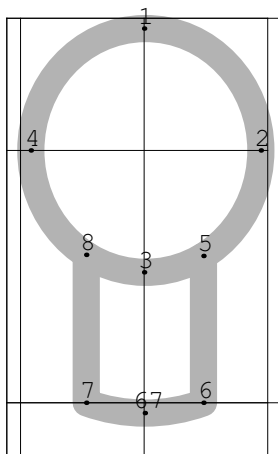


Figure 3: Proof diagram of `lightbulb10.mf`

```
*\bye
[1]
Output written on testfont.dvi (1 page, 1516 bytes).
Transcript written on testfont.log.
```

The resulting table, stored in `testfont.dvi` and illustrated in Figure 4, shows every character in the font. To understand how to read the table, note that the character code for “A”—the only character defined by `lightbulb10.mf`—is 41 in hexadecimal (base 16) and 101 in octal (base 8).

Test of lightbulb10 on March 11, 2003 at 1127									
	'0	'1	'2	'3	'4	'5	'6	'7	
'10x		8							"4x
'11x									
	"8	"9	"A	"B	"C	"D	"E	"F	

Figure 4: Font table produced by `testfont.tex`

The LightBulb10 font is now usable by \TeX . $\text{\LaTeX}_{2\epsilon}$, however, needs more information before documents can use the font. First, we create a font-description file that tells $\text{\LaTeX}_{2\epsilon}$ how to map fonts in a given font family and encoding to a particular font in a particular font size. For symbol fonts, this mapping is fairly simple. Symbol fonts almost always use the “U” (“Unknown”) font encoding and frequently occur in only one variant: normal weight and non-italicized. The filename for a font-description file is important; it must be of the form “ $\langle encoding \rangle \langle family \rangle .fd$ ”, where $\langle encoding \rangle$ is the lowercase version of the encoding name (typically “u” for symbol fonts) and $\langle family \rangle$ is the name of the font family. For LightBulb10, let’s call this “bulb”. Figure 5 lists the contents of `ubulb.fd`. The document “ $\text{\LaTeX}_{2\epsilon}$ Font Selection” [LAT00] describes `\DeclareFontFamily` and `\DeclareFontShape` in detail, but the gist of `ubulb.fd` is first to declare a U-encoded version of the `bulb` font family and then to specify that a $\text{\LaTeX}_{2\epsilon}$ request for a U-encoded version of `bulb` with a (m)edium font series (as opposed to, e.g., bold) and a (n)ormal font shape (as opposed to, e.g., italic) should translate into a \TeX request for `lightbulb10.tfm` mechanically scaled to the current font size.

The final step is to write a $\text{\LaTeX}_{2\epsilon}$ style file that defines a name for each symbol in the font. Because we have only one symbol our style file, `lightbulb.sty` (Figure 6), is rather trivial. Note that instead of typesetting “A” we could have had `\lightbulb typeset “\char65”`, `\lightbulb typeset “\char"41”`, or `\lightbulb typeset “\char'101”` (respectively, decimal, hexadecimal,

```
\DeclareFontFamily{U}{bulb}{}
\DeclareFontShape{U}{bulb}{m}{n}{<-> lightbulb10}{}

```

Figure 5: L^AT_EX 2_ε font-description file (ubulb.fd)

and octal character offsets into the font). For a simple, one-character symbol font such as LightBulb10 it would be reasonable to merge ubulb.fd into lightbulb.sty instead of maintaining two separate files. In either case, a document need only include “\usepackage{lightbulb}” to make the \lightbulb symbol available.

```
\newcommand{\lightbulb}{\usefont{U}{bulb}{m}{n}A}}

```

Figure 6: L^AT_EX 2_ε style file (lightbulb.sty)

METAFONT normally produces bitmapped fonts. However, it is also possible, with the help of some external tools, to produce PostScript Type 1 fonts. These have the advantages of rendering better in Adobe[®] Acrobat[®] (at least in versions prior to 6.0) and of being more memory-efficient when handled by a PostScript interpreter. See <http://www.tex.ac.uk/cgi-bin/texfaq2html?label=textrace> for pointers to tools that can produce Type 1 fonts from METAFONT.

7.3 Math-mode spacing

Terms such as “binary operators”, “relations”, and “punctuation” in Section 3 primarily regard the surrounding spacing. (See the Short Math Guide for L^AT_EX [Dow00] for a nice exposition on the subject.) To use a symbol for a different purpose, you can use the T_EX commands \mathord, \mathop, \mathbin, \mathrel, \mathopen, \mathclose, and \mathpunct. For example, if you want to use \downarrow as a variable (an “ordinary” symbol) instead of a delimiter, you can write “\$3 x + \mathord{\downarrow}\$” to get the properly spaced “3x+↓” rather than the awkward-looking “3x+ ↓”. Similarly, to create a dotted-union symbol (“ $\dot{\cup}$ ”) that spaces like the ordinary set-union symbol (\cup) it must be defined with \mathbin, just as \cup is. Contrast “\$A \dot{\cup} B\$” (“ $A \dot{\cup} B$ ”) with “\$A \mathbin{\dot{\cup}} B\$” (“ $A \dot{\cup} B$ ”). See The T_EXbook [Knu86a] for the definitive description of math-mode spacing.

The purpose of the “log-like symbols” in Tables 84 and 85 is to provide the correct amount of spacing around and within multiletter function names. Table 204 contrasts the output of the log-like symbols with various, naïve alternatives. In addition to spacing, the log-like symbols also handle subscripts properly. For example, “\max_{p \in P}” produces “max_{p∈P}” in text, but “max” as part of a displayed formula.

TABLE 204: Spacing Around/Within Log-like Symbols

L ^A T _E X expression	Output
\$r \sin \theta\$	$r \sin \theta$ (best)
\$r \sin \theta\$	$r \sin \theta$
\$r \mbox{sin} \theta\$	$r \sin \theta$

The amsmath package makes it straightforward to define new log-like symbols:

```
\DeclareMathOperator{\atan}{atan}
\DeclareMathOperator*{\lcm}{lcm}

```

The difference between \DeclareMathOperator and \DeclareMathOperator* involves the handling of subscripts. With \DeclareMathOperator*, subscripts are written beneath log-like symbols in display style and to the right in text style. This is useful for limit operators (e.g., \lim) and functions that tend to map over a set (e.g., \min). In contrast, \DeclareMathOperator tells T_EX that subscripts should always be displayed to the right of the operator, as is common for functions that take a single parameter (e.g., \log and \cos). Table 205 contrasts

symbols declared with `\DeclareMathOperator` and `\DeclareMathOperator*` in both text style (\dots) and display style ($\big[\dots\big]$).⁷

TABLE 205: Defining new log-like symbols

Declaration function	$\$\newlogsym_{p \in P}\$$	$\big[\ \newlogsym_{p \in P}\ \big]$
<code>\DeclareMathOperator</code>	$\text{newlogsym}_{p \in P}$	$\text{newlogsym}_{p \in P}$
<code>\DeclareMathOperator*</code>	$\text{newlogsym}_{p \in P}$	$\text{newlogsym}_{p \in P}$

It is common to use a thin space (`\,`) between the words of a multiword operators, as in “`\DeclareMathOperator*{\argmax}{arg,max}`”. `\liminf`, `\limsup`, and all of the log-like symbols shown in Table 85 utilize this spacing convention.

7.4 Bold mathematical symbols

L^AT_EX does not normally use bold symbols when typesetting mathematics. However, bold symbols are occasionally needed, for example when naming vectors. Any of the approaches described at <http://www.tex.ac.uk/cgi-bin/texfaq2html?label=boldgreek> can be used to produce bold mathematical symbols. Table 206 contrasts the output produced by these various techniques. As the table illustrates, these techniques exhibit variation in their formatting of Latin letters (upright vs. italic), formatting of Greek letters (bold vs. normal), formatting of operators and relations (bold vs. normal), and spacing.

TABLE 206: Producing bold mathematical symbols

Package	Code	Output	
<i>none</i>	<code>\alpha + b = \Gamma \div D</code>	$\alpha + b = \Gamma \div D$	(no bold)
<i>none</i>	<code>\mathbf{\alpha + b = \Gamma \div D}</code>	$\alpha + \mathbf{b} = \mathbf{\Gamma} \div \mathbf{D}$	
<i>none</i>	<code>\boldmath\alpha + b = \Gamma \div D</code>	$\boldsymbol{\alpha} + \boldsymbol{b} = \boldsymbol{\Gamma} \div \boldsymbol{D}$	
<i>amsbsy</i>	<code>\pmb{\alpha + b = \Gamma \div D}</code>	$\boldsymbol{\alpha} + \boldsymbol{b} = \boldsymbol{\Gamma} \div \boldsymbol{D}$	(faked bold)
<i>amsbsy</i>	<code>\boldsymbol{\alpha + b = \Gamma \div D}</code>	$\boldsymbol{\alpha} + \boldsymbol{b} = \boldsymbol{\Gamma} \div \boldsymbol{D}$	
<i>bm</i>	<code>\bm{\alpha + b = \Gamma \div D}</code>	$\boldsymbol{\alpha} + \boldsymbol{b} = \boldsymbol{\Gamma} \div \boldsymbol{D}$	
<i>fixmath</i>	<code>\mathbf{\alpha + b = \Gamma \div D}</code>	$\boldsymbol{\alpha} + \boldsymbol{b} = \boldsymbol{\Gamma} \div \boldsymbol{D}$	

7.5 ASCII and Latin 1 quick reference

Table 207 on the next page amalgamates data from various other tables in this document into a convenient reference for L^AT_EX 2_ε typesetting of ASCII characters, i.e., the characters available on a typical U.S. computer keyboard. The first two columns list the character’s ASCII code in decimal and hexadecimal. The third column shows what the character looks like. The fourth column lists the L^AT_EX 2_ε command to typeset the character as a text character. And the fourth column lists the L^AT_EX 2_ε command to typeset the character within a `\texttt{...}` command (or, more generally, when `\ttfamily` is in effect).

The following are some additional notes about the contents of Table 207:

- “” is not available in the OT1 font encoding.
- The characters “<”, “>”, and “|” do work as expected in math mode, although they produce, respectively, “ \lvert ”, “ \rvert ”, and “ \mid ” in text mode.⁸ Hence, `<$`, `>$`, and `$|` serve as a terser alternative to `\textless`,

⁷Note that `\displaystyle` can be used to force display style within \dots and `\textstyle` can be used to force text style within $\big[\dots\big]$.

⁸Donald Knuth didn’t think such symbols were important outside of mathematics, so he omitted them from the OT1 font encoding.

TABLE 207: L^AT_EX 2_ε ASCII Table

Dec	Hex	Char	Body text	\texttt	Dec	Hex	Char	Body text	\texttt
33	21	!	!	!	62	3E	>	\textgreater	>
34	22	"	\textquotedbl	"	63	3F	?	?	?
35	23	#	\#	\#	64	40	@	@	@
36	24	\$	\\$	\\$	65	41	A	A	A
37	25	%	\%	\%	66	42	B	B	B
38	26	&	\&	\&	67	43	C	C	C
39	27	,	,	,	⋮	⋮	⋮	⋮	⋮
40	28	(((90	5A	Z	Z	Z
41	29)))	91	5B	[[[
42	2A	*	*	*	92	5C	\	\textbackslash	\char‘\
43	2B	+	+	+	93	5D]]]
44	2C	,	,	,	94	5E	^	\^{}	\^{}
45	2D	-	-	-	95	5F	_	_	\char‘_
46	2E	.	.	.	96	60	‘	‘	‘
47	2F	/	/	/	97	61	a	a	a
48	30	0	0	0	98	62	b	b	b
49	31	1	1	1	99	63	c	c	c
50	32	2	2	2	⋮	⋮	⋮	⋮	⋮
⋮	⋮	⋮	⋮	⋮	122	7A	z	z	z
57	39	9	9	9	123	7B	{	\{	\char‘{
58	3A	:	:	:	124	7C		\textbar	
59	3B	;	;	;	125	7D	}	\}	\char‘}
60	3C	<	\textless	<	126	7E	~	\~{}	\~{}
61	3D	=	=	=					

\textgreater, and \textbar. Note that for typesetting metavariables many people prefer \texttriangle and \texttriangle to \textless and \textgreater, i.e., “(filename)” instead of “<filename>”.

- Although “/” does not require any special treatment, L^AT_EX additionally defines a \slash command which outputs the same glyph but permits a line break afterwards. That is, “increase/decrease” is always typeset as a single entity while “increase\slash{}decrease” may be typeset with “increase/” on one line and “decrease” on the next.
- The various \char commands within \texttt are necessary only in the OT1 font encoding. In other encodings (e.g., T1), commands such as \{, \}, _, and \textbackslash all work properly.
- \textasciicircum can be used instead of \^{}, and \textasciitilde can be used instead of \~{}. Note that \textasciitilde and \~{} produce raised, diacritic tildes. “Text” (i.e., vertically centered) tildes can be generated with either the math-mode \sim command (shown in Table 42 on page 23), which produces a somewhat wide “~”, or the textcomp package’s \texttildelow (shown in Table 24 on page 15), which produces a vertically centered “~” in most fonts but a baseline-oriented “~” in Computer Modern, txfonts, pxfonts, and various other fonts originating from the T_EX world. If your goal is to typeset tildes in URLs or Unix filenames, your best bet is to use the url package, which has a number of nice features such as proper line-breaking of such names.
- The IBM version of ASCII characters 1 to 31 can be typeset using the ascii package. See Table 149 on page 47.
- To replace “” and “'” with the more computer-like (and more visibly distinct) “`” and “'” within a verbatim environment, use the upquote package. Outside of verbatim, you can use \char18 and \char13

to get the modified quote characters. (The former is actually a grave accent.)

Similar to Table 207, Table 208 on the next page is an amalgamation of data from other tables in this document. While Table 207 shows how to typeset the 7-bit ASCII character set, Table 208 shows the Latin 1 (Western European) character set, also known as ISO-8859-1.

The following are some additional notes about the contents of Table 208:

- A “(tc)” after a symbol name means that the `textcomp` package must be loaded to access that symbol. A “(T1)” means that the symbol requires the T1 font encoding. The `fontenc` package can change the font encoding document-wide.
- Many of the `\text...` accents can also be produced using the accent commands shown in Table 12 on page 11 plus an empty argument. For instance, `\={}` is essentially the same as `\textasciimacron`.
- The commands in the “ $\text{\LaTeX 2}_{\epsilon}$ ” columns work both in body text and within a `\texttt{...}` command (or, more generally, when `\ttfamily` is in effect).
- Microsoft[®] Windows[®] normally uses a superset of Latin 1 called “CP1252” (Code Page 1252). CP1252 adds codes in the range 128–159 (hexadecimal 80–9F), including characters such as dashes, daggers, and quotation marks. If there’s sufficient interest, a future version of the Comprehensive \LaTeX Symbol List may include a CP1252 table.

While too large to incorporate into this document, a listing of ISO 8879:1986 SGML/XML character entities and their \LaTeX equivalents is available from <http://www.bitjungle.com/~isoent/>. Some of the characters presented there make use of `isoent`, a $\text{\LaTeX 2}_{\epsilon}$ package (available from the same URL) that fakes some of the missing ISO glyphs using the \LaTeX `picture` environment.⁹

7.6 About this document

History David Carlisle wrote the first version of this document in October, 1994. It originally contained all of the native \LaTeX symbols (Tables 27, 35, 42, 67, 84, 86, 101, 102, 108, 112, 125, and a few tables that have since been reorganized) and was designed to be nearly identical to the tables in Chapter 3 of Leslie Lamport’s book [Lam86]. Even the table captions and the order of the symbols within each table matched! The \mathcal{AMS} symbols (Tables 28, 43, 44, 70, 71, 87, 91, 97, and 126) and an initial Math Alphabets table (Table 135) were added thereafter. Later, Alexander Holt provided the `stmaryrd` tables (Tables 29, 37, 45, 73, 81, and 98).

In January, 2001, Scott Pakin took responsibility for maintaining the symbol list and has since implemented a complete overhaul of the document. The result, now called, “The Comprehensive \LaTeX Symbol List”, includes the following new features:

- the addition of a handful of new math alphabets, dozens of new font tables, and thousands of new symbols
- the categorization of the symbol tables into body-text symbols, mathematical symbols, science and technology symbols, dingbats, and other symbols, to provide a more user-friendly document structure
- an index, table of contents, and a frequently-requested symbol list, to help users quickly locate symbols
- symbol tables rewritten to list the symbols in alphabetical order
- appendices to provide additional information relevant to using symbols in \LaTeX
- tables showing how to typeset all of the characters in the ASCII and Latin 1 font encodings

Furthermore, the internal structure of the document has been completely altered from David’s original version. Most of the changes are geared towards making the document easier to extend, modify, and reformat.

⁹`isoent` is not featured in this document, because it is not available from CTAN and because the faked symbols are not “true” characters; they exist in only one size, regardless of the body text’s font size.

TABLE 208: L^AT_EX 2_ε Latin 1 Table

Dec	Hex	Char	L ^A T _E X 2 _ε	Dec	Hex	Char	L ^A T _E X 2 _ε
161	A1	¡	!‘	209	D1	Ñ	\~{N}
162	A2	¢	\textcent (tc)	210	D2	Ò	\~{O}
163	A3	£	\pounds	211	D3	Ó	\~{O}
164	A4	¤	\textcurrency (tc)	212	D4	Ô	\~{O}
165	A5	¥	\textyen (tc)	213	D5	Õ	\~{O}
166	A6	¦	\textbrokenbar (tc)	214	D6	Ö	\~{O}
167	A7	§	\S	215	D7	×	\texttimes (tc)
168	A8	¨	\textasciidieresis (tc)	216	D8	Ø	\O
169	A9	©	\textcopyright	217	D9	Ù	\~{U}
170	AA	ª	\textordfeminine	218	DA	Ú	\~{U}
171	AB	«	\guillemotleft (T1)	219	DB	Û	\~{U}
172	AC	¬	\textlnot (tc)	220	DC	Ü	\~{U}
174	AE	®	\textregistered	221	DD	Ý	\~{Y}
175	AF	—	\textasciimacron (tc)	222	DE	Þ	\TH (T1)
176	B0	°	\textdegree (tc)	223	DF	ß	\ss
177	B1	±	\textpm (tc)	224	E0	à	\~{a}
178	B2	²	\texttwosuperior (tc)	225	E1	á	\~{a}
179	B3	³	\textthreesuperior (tc)	226	E2	â	\~{a}
180	B4	´	\textasciiacute (tc)	227	E3	ã	\~{a}
181	B5	µ	\textmu (tc)	228	E4	ä	\~{a}
182	B6	¶	\P	229	E5	å	\aa
183	B7	·	\textperiodcentered	230	E6	æ	\ae
184	B8	{	\c{}	231	E7	ç	\c{c}
185	B9	¹	\textonesuperior (tc)	232	E8	è	\~{e}
186	BA	º	\textordmasculine	233	E9	é	\~{e}
187	BB	»	\guillemotright	234	EA	ê	\~{e}
188	BC	¼	\textonequarter (tc)	235	EB	ë	\~{e}
189	BD	½	\textonehalf (tc)	236	EC	ì	\~{i}
190	BE	¾	\textthreequarters (tc)	237	ED	í	\~{i}
191	BF	¿	?‘	238	EE	î	\~{i}
192	C0	À	\~{A}	239	EF	ï	\~{i}
193	C1	Á	\~{A}	240	F0	ð	\dh (T1)
194	C2	Â	\~{A}	241	F1	ñ	\~{n}
195	C3	Ã	\~{A}	242	F2	ò	\~{o}
196	C4	Ä	\~{A}	243	F3	ó	\~{o}
197	C5	Å	\AA	244	F4	ô	\~{o}
198	C6	Æ	\AE	245	F5	õ	\~{o}
199	C7	Ç	\c{C}	246	F6	ö	\~{o}
200	C8	È	\~{E}	247	F7	÷	\textdiv (tc)
201	C9	É	\~{E}	248	F8	ø	\o
202	CA	Ê	\~{E}	249	F9	ù	\~{u}
203	CB	Ë	\~{E}	250	FA	ú	\~{u}
204	CC	Ì	\~{I}	251	FB	û	\~{u}
205	CD	Í	\~{I}	252	FC	ü	\~{u}
206	CE	Î	\~{I}	253	FD	ý	\~{y}
207	CF	Ï	\~{I}	254	FE	þ	\th (T1)
208	D0	Ð	\DH (T1)	255	FF	ÿ	\~{y}

Build characteristics Table 209 lists some of this document’s build characteristics. Most important is the list of packages that L^AT_EX couldn’t find, but that `symbols.tex` otherwise would have been able to take advantage of. Complete, prebuilt versions of this document are available from CTAN (<http://www.ctan.org/> or one of its many mirror sites) in the directory `tex-archive/info/symbols/comprehensive`. Table 210 shows the package date (specified in the `.sty` file with `\ProvidesPackage`) for each package that was used to build this document and that specifies a package date. Packages are not listed in any particular order in either Table 209 or 210.

TABLE 209: Document Characteristics

Characteristic	Value
Source file:	<code>symbols.tex</code>
Build date:	September 18, 2003
Symbols documented:	2826
Packages included:	textcomp latexsym amssymb stmaryrd euscript wasysym pi-font manfnt bbding undertilde ifsym tipa wsuipa phonetic ulsy ar txfonts mathabx fclfont skak ascii dingbat skull eu-rosym esvect yfonts yhmach esint mathdots trsym universa upgreek overrightarrow chemarr chemarrow nath trfsigns accents nicefrac bm mathrsfs zapfchan bbold mbboard ds-font bbm
Packages omitted:	<i>none</i>

References

- [Ber01] Karl Berry. Fontname: Filenames for T_EX fonts, June 2001. Available from <http://www.ctan.org/tex-archive/info/fontname>.
- [Dow00] Michael Downes. Short math guide for L^AT_EX, July 19, 2000. Version 1.07. Available from <http://www.ams.org/tex/short-math-guide.html>.
- [Gib97] Jeremy Gibbons. Hey—it works! *TUGboat*, 18(2):75–78, June 1997. Available from <http://www.tug.org/TUGboat/Articles/tb18-2/tb55works.pdf>.
- [Knu86a] Donald E. Knuth. *The T_EXbook*, volume A of *Computers and Typesetting*. Addison-Wesley, Reading, MA, USA, 1986.
- [Knu86b] Donald E. Knuth. *The METAFONTbook*, volume C of *Computers and Typesetting*. Addison-Wesley, Reading, MA, USA, 1986.
- [Lam86] Leslie Lamport. *L^AT_EX: A document preparation system*. Addison-Wesley, Reading, MA, USA, 1986.
- [L^AT98] L^AT_EX3 Project Team. A new math accent. *L^AT_EX News*. Issue 9, June 1998. Available from <http://www.ctan.org/tex-archive/macros/latex/doc/ltnews09.pdf> (also included in many T_EX distributions).
- [L^AT00] L^AT_EX3 Project Team. L^AT_EX 2_ε font selection, January 30, 2000. Available from <http://www.ctan.org/tex-archive/macros/latex/doc/fntguide.ps> (also included in many T_EX distributions).

TABLE 210: Package versions used in the preparation of this document

Name	Date
textcomp	2000/08/30
latexsym	1998/08/17
amssymb	1996/11/03
stmaryrd	1994/03/03
euscript	1995/01/06
wasysym	1999/05/13
pifont	2000/01/12
manfnt	1999/07/01
bbding	1999/04/15
undertilde	2000/08/08
ifsym	2000/04/18
tipa	2001/12/31
wsuipa	1994/07/16
txfonts	2000/12/15
skak	2003/01/25
dingbat	2001/04/27
skull	2002/01/23
eurosym	1998/08/06
yfonts	2003/01/08
mathdots	2001/02/28
trsym	2000/06/25
universa	98/08/01
upgreek	2003/02/12
chemarr	2001/06/22
accents	2000/08/06
nicefrac	1998/08/04
bm	1999/07/05

Index

If you're having trouble locating a symbol, try looking under "T" for "`\text{...}`". Many text-mode commands begin with that prefix. Also, accents are shown over/under a black box, e.g., "■" for "`\'`".

Some symbol entries appear to be listed repeatedly. This happens when multiple packages define identical (or nearly identical) glyphs with the same symbol name.¹⁰

Symbols			
<code>\"</code> (■)	11	<code>\ae</code> (æ)	8
<code>\#</code> (#)	7, 72	<code>\agem0</code> (U)	42
<code>\\$</code> (\$)	7, 72	<code>\ain</code> (')	13
<code>\%</code> (%)	7, 72	<code>\aleph</code> (ℵ)	33, 42
<code>\&</code> (&)	7, 72	<code>\alpha</code> (α)	32
<code>\'</code> (■)	11	alphabets	
<code>\(</code> ((35	African	8
<code>\)</code> ())	35	Cyrillic	62
<code>*</code> (*)	19	Greek	32, 33, 44
<code>\,</code>	71	Hebrew	33, 44
<code>\.</code> (■)	11	math	44
<code>\(/</code> (/)	35	phonetic	8–11
<code>\[</code> ([)	35	<code>\alphaup</code> (α)	32
<code>\]</code> (])	35	alpine symbols	58
<code>\^</code> (■)	11	<code>\amalg</code> (II)	17
<code>\^{}{}</code> (^)	72	ampersand	<i>see</i> <code>\&</code>
<code>\ </code> ()	35	\mathcal{MS}	6, 16, 17, 20, 23, 26–29, 31–34, 37, 39, 41, 42, 44, 60, 73
<code>\=</code> (■)	11	<code>amsbsy</code> (package)	71
<code>\={}</code> (˘)	73	<code>amsfonts</code> (package)	17, 23, 25, 28, 42, 44
<code> </code> ()	35	<code>amsmath</code> (package)	6, 31, 70
<code>_</code> (ˉ)	7, 72	<code>amssymb</code> (package)	6, 17, 23, 25, 28, 42, 44, 75–77
<code>\{</code> ({)	7, 35, 72	<code>amstext</code> (package)	63, 64
<code>\}</code> (})	7, 35, 72	<code>\anchor</code> (⤵)	54
<code>\'</code> (■)	11	and	<i>see</i> <code>\wedge</code>
<code>\~</code> (■)	11	<code>\angle</code> (∠)	42
<code>\~{}{}</code> (˘)	72	<code>\angle</code> (∠)	42
		angles	42, 43
A		<code>\Anglesign</code> (✠)	43
<code>a</code> (esvect package option)	40	Ångström unit	
<code>\AA</code> (Å)	8	math mode	<i>see</i> <code>\mathring</code>
<code>\aa</code> (å)	8	text mode	<i>see</i> <code>\AA</code>
abzüglich	<i>see</i> <code>\textdiscount</code>	angular minutes	<i>see</i> <code>\prime</code>
<code>\AC</code> (˘)	45	angular seconds	<i>see</i> <code>\second</code>
<code>\acarc</code>	13	<code>\Ankh</code> (†)	57
<code>\acbar</code>	13	<code>\annu</code> (■)	67
accents	11–14, 37, 38, 40, 47, 65–66	annuities	66
any character as	65	APL	
extensible	38–40, 65–66	modifiers	47
multiple per character	65	symbols	46
<code>accents</code> (package)	65, 75, 76	<code>\APLbox</code> (□)	46
<code>\accentset</code>	65	<code>\APLcirc</code> (■)	47
<code>\ACK</code> (♠)	47	<code>\APLcomment</code> (ⓐ)	46
<code>\acute</code> (■)	37	<code>\APLdown</code> (∇)	46
Adobe Acrobat	70	<code>\APLdownarrowbox</code> (⌋)	46
<code>\adots</code> (⋯)	41, 65	<code>\APLinput</code> (□)	46
advancing	<i>see</i> <code>\textadvancing</code>		
<code>\AE</code> (Æ)	8		
		<code>\APLinv</code> (⊞)	46
		<code>\APLleftarrowbox</code> (⌈)	46
		<code>\APLlog</code> (⊗)	46
		<code>\APLminus</code> (−)	46
		<code>\APLnot</code> (■)	47
		<code>\APLrightarrowbox</code> (⌋)	46
		<code>\APLstar</code> (★)	46
		<code>\APLup</code> (Δ)	46
		<code>\APLuparrowbox</code> (⌈)	46
		<code>\APLvert</code> (■)	47
		<code>\apprge</code> (≥)	27
		<code>\apprle</code> (≤)	27
		<code>\approx</code> (≈)	23
		<code>\approxeq</code> (≈)	23
		<code>\Aquarius</code> (♒)	46
		<code>\aquarius</code> (♒)	46
		<code>\AR</code> (ℛ)	45
		<code>ar</code> (package)	45, 75
		<code>\arccos</code> (arccos)	31
		arcminutes	<i>see</i> <code>\prime</code>
		arcseconds	<i>see</i> <code>\second</code>
		<code>\arcsin</code> (arcsin)	31
		<code>\arctan</code> (arctan)	31
		<code>\arg</code> (arg)	31
		<code>\Aries</code> (♈)	46
		<code>\Aries</code> (♈)	46
		<code>\aries</code> (♈)	46
		<code>\ArrowBoldDownRight</code> (↘)	49
		<code>\ArrowBoldRightCircled</code> (↻)	49
		<code>\ArrowBoldRightShort</code> (↗)	49
		<code>\ArrowBoldRightStrobe</code> (⚡)	49
		<code>\ArrowBoldUpRight</code> (↗)	49
		<code>\Arrownot</code> (⌋)	31
		<code>\arrownot</code> (⌋)	31
		arrows	28–30, 49, 60
		diagonal, for reducing subex- pressions	38
		double-headed, diagonal	64
		extensible	38–40
		negated	29, 30
		<code>\Arrowvert</code> (⌋)	35
		<code>\arrowvert</code> (⌋)	35
		Arseneau, Donald	64–66
		ASCII	6, 8, 47, 71–73
		table	72
		<code>ascii</code> (package)	47, 72, 75
		<code>\ascnode</code> (Ⓢ)	45
		aspect ratio	45

¹⁰This occurs frequently between `amssymb` and `mathabx`, for example.

<code>\ast (*)</code>	19	<code>\barp (p̄)</code>	10	<code>\bigboxleft (⊠)</code>	21
<code>\ast (*)</code>	17	barred letters	62	<code>\bigboxminus (⊠)</code>	21
<code>\Asterisk (*)</code>	19	<code>\barrightharpoon (⇒)</code>	30	<code>\bigboxplus (⊠)</code>	21
<code>\Asterisk (*)</code>	52	<code>\barsci (i̇)</code>	10	<code>\bigboxright (⊠)</code>	21
<code>\asterisk (*)</code>	19	<code>\barscu (u̇)</code>	10	<code>\bigboxslash (⊠)</code>	21
<code>\AsteriskBold (*)</code>	52	<code>\baru (u̇)</code>	10	<code>\bigboxtimes (⊠)</code>	21
<code>\AsteriskCenterOpen (*)</code>	52	<code>\barwedge (π)</code>	19	<code>\bigboxtop (⊠)</code>	21
<code>\AsteriskRoundedEnds (*)</code>	52	<code>\barwedge (λ)</code>	17	<code>\bigboxtriangleup (⊠)</code>	21
asterisks	19, 52	<code>\Bat (↔)</code>	57	<code>\bigboxvoid (□)</code>	21
<code>\AsteriskThin (*)</code>	52	<code>\baucircle (●)</code>	54	<code>\bigcap (⋂)</code>	20
<code>\AsteriskThinCenterOpen (*)</code>	52	<code>\bauforms (⊙)</code>	57	<code>\bigcirc (○)</code>	17
astrological symbols	46	<code>\bauhead (⊙)</code>	57	<code>\BigCircle (○)</code>	53
astronomical symbols	45, 46	<code>\bausquare (■)</code>	54	<code>\bigcoast (*)</code>	19
<code>\astrosun (☉)</code>	45	<code>\bautriangle (▲)</code>	54	<code>\bigcomplementtop (⊖)</code>	21
<code>\asymp (≈)</code>	23	<code>\bbalpha (α)</code>	44	<code>\BigCross (X)</code>	53
<code>\atan (atan)</code>	70	<code>\bbbar (b̄)</code>	63	<code>\bigcup (⋃)</code>	20
<code>\ataribox (⊠)</code>	56	<code>\bbbeta (β)</code>	44	<code>\bigcurlyvee (⋈)</code>	21
<code>\AtForty (40)</code>	57	<code>\Bbbk (k)</code>	33	<code>\bigcurlyvee (Y)</code>	20
<code>\AtNinetyFive (45)</code>	57	bbding (package)	49–53, 55, 61, 75, 76	<code>\bigcurlywedge (⋈)</code>	21
atomic math objects	31, 71	<code>\bbddollar (\$)</code>	44	<code>\bigcurlywedge (人)</code>	20
<code>\AtSixty (60)</code>	57	<code>\bbetier (⊖)</code>	59	<code>\BigDiamondshape (◇)</code>	53
<code>\autoleftarrow (←)</code>	39	<code>\bbeuro (€)</code>	44	<code>\BigHBar (⎯)</code>	53
<code>\autoleftrightarrows (↔)</code>	39	<code>\bbfinalnun ()</code>	44	<code>\biginterleave ()</code>	20
<code>\autorightarrow (→)</code>	39	<code>\bbgamma (γ)</code>	44	<code>\BigLowerDiamond (◊)</code>	53
<code>\autorightleftharpoons (↔)</code>	39	bbgreekl (mathbbol package option)	44	<code>\bignplus (⊕)</code>	20
		bbm (package)	44, 75	<code>\bigogasterisk (⊗)</code>	21
		<code>\bbnabla (∇)</code>	44	<code>\bigobackslash (⊗)</code>	21
		bbold (package)	44, 75	<code>\bigobot (⊕)</code>	21
		<code>\bbpe (⊠)</code>	44	<code>\bigocirc (⊙)</code>	21
		<code>\bbqof (⊠)</code>	44	<code>\bigocoasterisk (⊗)</code>	21
		<code>\bbslash (\\)</code>	18	<code>\bigodiv (⊙)</code>	21
		<code>\bbyod (y)</code>	44	<code>\bigodot (⊙)</code>	20
		<code>\bdecisive (−+)</code>	59	<code>\bigoleft (⊕)</code>	21
		<code>\Beam (⎯)</code>	47	<code>\bigominus (⊖)</code>	21
		<code>\Bearing (Δ)</code>	47	<code>\bigoplus (⊕)</code>	20
		<code>\because (∵)</code>	23	<code>\bigoright (⊕)</code>	21
		<code>\BEL (•)</code>	47	<code>\bigoslash (⊗)</code>	21
		<code>\bell (♣)</code>	56	<code>\bigotimes (⊗)</code>	20
		Berry, Karl	75	<code>\bigotop (⊕)</code>	21
		<code>\beta (β)</code>	32	<code>\bigotriangleup (⊕)</code>	21
		<code>\betaup (β)</code>	32	<code>\bigovoid (○)</code>	21
		<code>\beth (beth)</code>	33	<code>\bigparallel ()</code>	20
		<code>\betteris (△)</code>	59	<code>\bigplus (+)</code>	21
		<code>\between (⋈)</code>	24	<code>\BigRightDiamond (◊)</code>	53
		<code>\between (⋈)</code>	23	<code>\bigsqcap (⊓)</code>	21
		<code>\Bicycle (♣)</code>	54	<code>\bigsqcap (⊓)</code>	20
		<code>\bigast (*)</code>	19	<code>\bigsqcapplus (⊓)</code>	22
		<code>\bigbox (⊠)</code>	20	<code>\bigsqcup (⊔)</code>	20
		<code>\bigboxasterisk (⊠)</code>	21	<code>\bigsqcupplus (⊔)</code>	22
		<code>\bigboxbackslash (⊠)</code>	21	<code>\BigSquare (□)</code>	53
		<code>\bigboxbot (⊠)</code>	21	<code>\bigsqplus (⊓)</code>	21
		<code>\bigboxcirc (⊠)</code>	21	<code>\bigstar (★)</code>	19
		<code>\bigboxcoasterisk (⊠)</code>	21	<code>\bigstar (★)</code>	42
		<code>\bigboxdiv (⊠)</code>	21	<code>\bigtimes (×)</code>	21
		<code>\bigboxdot (⊠)</code>	21	<code>\BigTriangleDown (▽)</code>	53
				<code>\bigtriangledown (▽)</code>	20
				<code>\bigtriangledown (▽ vs. ∇)</code>	61

<code>\bigtriangledown</code> (∇)	17	<code>\boxast</code> (\boxtimes)	18	<code>\CAN</code> (\dagger)	47
<code>\BigTriangleLeft</code> (\triangleleft)	53	<code>\boxasterisk</code> ($\box*$)	19	<code>\cancel</code> (package)	38
<code>\BigTriangleRight</code> (\triangleright)	53	<code>\boxbackslash</code> ($\box\backslash$)	19	<code>\Cancer</code> (\mathfrak{C})	46
<code>\BigTriangleUp</code> (\triangle)	53	<code>\boxbar</code> (\boxbar)	18	<code>\cancer</code> (\mathfrak{C})	46
<code>\bigtriangleup</code> (\triangle)	20	<code>\boxbot</code> (\boxbot)	19	<code>\Cap</code> (\mathfrak{M})	17
<code>\bigtriangleup</code> (\triangle vs. Δ)	61	<code>\boxbox</code> (\boxbox)	18	<code>\cap</code> (\cap)	19
<code>\bigtriangleup</code> (\triangle)	17	<code>\boxbslash</code> ($\box\backslash$)	18	<code>\cap</code> (\cap)	17
<code>\biguplus</code> (\boxplus)	20	<code>\boxcirc</code> (\boxcirc)	19	<code>\Capricorn</code> (\mathfrak{C})	46
<code>\bigvarstar</code> (\star)	19	<code>\boxcircle</code> (\boxcircle)	18	<code>\capricornus</code> (\mathfrak{C})	46
<code>\BigVBar</code> (\bigvee)	53	<code>\boxcoasterisk</code> ($\box\circ$)	19	card suits	42, 55
<code>\bigvee</code> (\bigvee)	20	<code>\boxdiv</code> (\boxdiv)	19	cardinality	<i>see</i> <code>\aleph</code>
<code>\bigwedge</code> (\bigwedge)	20	<code>\boxdot</code> (\boxdot)	19	care of ($\text{\textcircled{c}}$)	43
<code>\binampersand</code> ($\&$)	18	<code>\boxdot</code> (\boxdot)	17, 18	caret	<i>see</i> <code>\^</code>
binary operators	17–19	<code>\boxdotLeft</code> ($\boxdot\leftarrow$)	29	Carlisle, David	1, 73
binary relations	23–27	<code>\boxdotLeft</code> ($\boxdot\leftarrow$)	29	carriage return	47, 54, 60, <i>see also</i> <code>\hookrightarrow</code>
negated	23–25	<code>\boxdotRight</code> ($\boxdot\rightarrow$)	29	<code>\carriagereturn</code> ($\r\n$)	54
<code>\bindasrepma</code> (\mathfrak{R})	18	<code>\boxdotright</code> ($\boxdot\rightarrow$)	29	castle	<i>see</i> chess symbols
<code>\Biohazard</code> (\mathfrak{B})	48	<code>\boxempty</code> (\boxempty)	18	catamorphism	<i>see</i> <code>\llparenthesis</code> <i>and</i> <code>\rrparenthesis</code>
biological symbols	48	<code>\boxLeft</code> (\boxLeft)	29	<code>\cdot</code> (\cdot)	17, 63
bishop	<i>see</i> chess symbols	<code>\boxleft</code> (\boxleft)	19	<code>\cdotp</code> (\cdot)	41
<code>\bishoppair</code> (\boxplus)	59	<code>\boxleft</code> (\boxleft)	29	<code>\cdots</code> (\cdots)	41
blackboard bold	<i>see</i> alphabets, math	<code>\boxminus</code> (\boxminus)	19	Cedi	<i>see</i> <code>\textcolonmonetary</code>
<code>\blackdiamond</code> (\blacklozenge)	19	<code>\boxminus</code> (\boxminus)	17	cedilla	<i>see</i> accents
<code>\blacklozenge</code> (\blacklozenge)	42	<code>\boxplus</code> (\boxplus)	17	<code>\celsius</code> ($^{\circ}\text{C}$)	43
<code>\blacksmiley</code> (\mathfrak{S})	56	<code>\boxRight</code> (\boxRight)	29	<code>\Celtcross</code> (\mathfrak{C})	57
<code>\blacksquare</code> (\blacksquare)	42	<code>\boxright</code> (\boxright)	19	<code>\cent</code> (\textcent)	14
<code>\blacktriangle</code> (\blacktriangle)	42	<code>\boxright</code> (\boxright)	29	<code>\centerdot</code> (\cdot)	19
<code>\blacktriangledown</code> (\blacktriangledown)	19	<code>\boxslash</code> ($\box\backslash$)	19	<code>\centerdot</code> (\cdot)	17
<code>\blacktriangledown</code> (\blacktriangledown)	42	<code>\boxslash</code> ($\box\backslash$)	18	<code>\centre</code> (\boxplus)	59
<code>\blacktriangleleft</code> (\blacktriangleleft)	19	<code>\boxtimes</code> (\boxtimes)	19	cents	<i>see</i> <code>\textcent</code>
<code>\blacktriangleleft</code> (\blacktriangleleft)	28	<code>\boxtimes</code> (\boxtimes)	17	<code>\CEsign</code> ($\mathfrak{C}\mathfrak{E}$)	48
<code>\blacktriangleright</code> (\blacktriangleright)	19	<code>\boxtop</code> (\boxtop)	19	<code>\changenotsign</code>	25
<code>\blacktriangleright</code> (\blacktriangleright)	28	<code>\boxtriangleup</code> (\boxtriangleup)	19	<code>\char</code>	6, 60
<code>\blacktriangleup</code> (\blacktriangleup)	19	<code>\boxvoid</code> (\boxvoid)	19	<code>\check</code> (\mathfrak{C})	37
blank	<i>see</i> <code>\textblank</code>	<code>\boy</code> (\mathfrak{O})	46	check marks	51, 54
<code>\Bleech</code> (\mathfrak{B})	57	<code>\braceld</code> (\mathfrak{B})	66	<code>\checked</code> (\checkmark)	56
<code>\blitza</code> (\mathfrak{B})	17, 30	<code>\bracerd</code> (\mathfrak{B})	66	<code>\CheckBox</code> (\boxplus)	51
<code>\blitzb</code> (\mathfrak{B})	30	<code>\bracevert</code> (\mathfrak{B})	35	<code>\Checkedbox</code> (\boxplus)	54
<code>\blitzc</code> (\mathfrak{B})	30	brackets	<i>see</i> delimiters	<code>\Checkmark</code> (\checkmark)	51
<code>\blitzd</code> (\mathfrak{B})	30	braket (package)	35	<code>\checkmark</code> (\checkmark)	16
<code>\blitze</code> (\mathfrak{B})	30	<code>\breve</code> (\mathfrak{B})	37	<code>\checkmark</code> (\checkmark)	54
<code>\bm</code> (package)	71, 75, 76	<code>\brokenvert</code> (\mathfrak{B})	56	<code>\CheckmarkBold</code> (\checkmark)	51
<code>\bm</code>	71	Bronger, Torsten	63	chemarr (package)	39, 75, 76
<code>\bmod</code>	31	<code>\BS</code> (\mathfrak{B})	47	chemarrow (package)	30, 39, 75
body-text symbols	7–16	<code>\BSEfree</code> (\mathfrak{B})	48	<code>\chemarrow</code> (\rightarrow)	30
bold symbols	71	<code>\bullet</code> (\bullet)	17	chess symbols	59
<code>\boldmath</code>	71	bullseye	<i>see</i> <code>\textbullseye</code>	<code>\chi</code> (χ)	32
<code>\boldsymbol</code>	71	<code>\Bumpedeq</code> (\mathfrak{B})	24	<code>\chiup</code> (χ)	32
born	<i>see</i> <code>\textborn</code>	<code>\bumpedeq</code> (\mathfrak{B})	24	<code>\circ</code> (\circ)	17, 43
<code>\bot</code> (\perp)	17, 33, 63	<code>\Bumpeq</code> (\mathfrak{B})	23	<code>\circeq</code> (\mathfrak{B})	24
<code>\botdoteq</code> (\mathfrak{B})	24	<code>\bumpeq</code> (\mathfrak{B})	23	<code>\circeq</code> (\mathfrak{B})	23
<code>\Bouquet</code> (\mathfrak{B})	57	<code>\bupperhand</code> (\mathfrak{B})	59	<code>\CIRCLE</code> (\bullet)	56
<code>\Bowtie</code> (\mathfrak{B})	56			<code>\Circle</code> (\circ)	53
<code>\bowtie</code> (\mathfrak{B})	23			<code>\Circle</code> (\circ vs. \circ)	61
<code>\Box</code> (\square)	42			<code>\Circle</code> (\circ)	56
<code>\Box</code> (\square)	42				

<code>\circlearrowleft</code> (\curvearrowleft)	30	<code>\colon</code> ($:$)	41	crucifixes	50, 51, 57
<code>\circlearrowright</code> (\curvearrowright)	29	<code>\Colonapprox</code> (\approx)	24	<code>\csc</code> (csc)	31
<code>\circlearrowright</code> (\curvearrowright)	30	<code>\colonapprox</code> (\approx)	24	CTAN	<i>see</i> Comprehensive T _E X
<code>\circlearrowright</code> (\curvearrowright)	29	<code>\Coloneq</code> (\coloneqq)	24	Archive Network	
circled numbers	51	<code>\coloneq</code> (\coloneqq)	24	<code>\Cube</code>	59, 60
<code>\CircledA</code> (\textcircled{A})	57	<code>\coloneq</code> (\coloneqq)	24	cube root	<i>see</i> <code>\sqrt</code>
<code>\circledast</code> ($\textcircled{*}$)	17	<code>\Coloneqq</code> (\coloneqq)	24	<code>\Cup</code> ($\textcircled{\cup}$)	17
<code>\circledbar</code> ($\textcircled{\bar{}}$)	18	<code>\coloneqq</code> (\coloneqq)	17, 24	<code>\cup</code> (\cup)	19
<code>\circledbslash</code> ($\textcircled{/}$)	18	<code>\Colonsim</code> (\sim)	24	<code>\cup</code> (\cup)	17, 63, 70
<code>\circledcirc</code> ($\textcircled{\circ}$)	17	<code>\colonsim</code> (\sim)	24	<code>\curlyc</code> (\mathfrak{C})	10
<code>\circleddash</code> ($\textcircled{-}$)	17	<code>\comment</code> (RR)	59	<code>\curlyeqprec</code> (\lessapprox)	24
<code>\circleddot</code>	<i>see</i> <code>\odot</code>	communication symbols	47	<code>\curlyeqprec</code> (\lessapprox)	23
<code>\circleddotleft</code> ($\leftarrow\textcircled{\cdot}$)	29	<code>comp.text.tex</code> (newsgroup)	6, 17, 62–66	<code>\curlyeqsucc</code> (\gtrapprox)	24
<code>\circleddotright</code> ($\rightarrow\textcircled{\cdot}$)	29	<code>\compensation</code> ($\textcircled{\text{C}}$)	59	<code>\curlyeqsucc</code> (\gtrapprox)	23
<code>\circledgtr</code> ($\textcircled{>}$)	24	<code>\complement</code> (\mathbb{C})	34	<code>\curlyesh</code> (\mathfrak{f})	10
<code>\circledless</code> ($\textcircled{<}$)	24	<code>\complement</code> (\mathbb{C})	33	<code>\curlyvee</code> (\vee)	19
<code>\circledminus</code>	<i>see</i> <code>\ominus</code>	complex numbers (\mathbb{C})	<i>see</i>	<code>\curlyvee</code> (\vee)	17
<code>\circleddotleft</code>	<i>see</i>	alphabets, math		<code>\curlyveedownarrow</code> (∇)	18
<code>\circleddotleft</code>	<i>see</i>	Comprehensive T _E X Archive Net-		<code>\curlyveeuparrow</code> (\Uparrow)	18
<code>\circleddotright</code>	<i>see</i>	work	1, 6, 44, 73, 75	<code>\curlywedge</code> (\wedge)	19
<code>\circleddotright</code>	<i>see</i>			<code>\curlywedge</code> (\wedge)	17
<code>\circleddotright</code>	<i>see</i>			<code>\curlywedgedownarrow</code> (\nwarrow)	18
<code>\circledplus</code>	<i>see</i> <code>\oplus</code>			<code>\curlywedgedownarrow</code> (\nwarrow)	18
<code>\circledR</code> (\textcircled{R})	16, 33	computer hardware symbols	47	<code>\curlywedgedownarrow</code> (\nwarrow)	18
<code>\circledS</code> (\textcircled{S})	33	<code>\ComputerMouse</code> ($\textcircled{\text{M}}$)	47	<code>\curlywedgeuparrow</code> (\Uparrow)	18
<code>\circledslash</code>	<i>see</i> <code>\oslash</code>	<code>\cong</code> (\cong)	23	<code>\curlyyogh</code> (\mathfrak{z})	10
<code>\circledtimes</code>	<i>see</i> <code>\otimes</code>	<code>\conjunction</code> (σ)	46	<code>\curlyz</code> (\mathfrak{z})	10
<code>\circledvee</code> ($\textcircled{\vee}$)	18	contradiction symbols	17, 30	<code>\currency</code> ($\text{\$}$)	14
<code>\circledwedge</code> ($\textcircled{\wedge}$)	18	control characters	47	currency symbols	14, 44
<code>\circleleft</code> ($\leftarrow\textcircled{\cdot}$)	29	<code>\convolution</code> (\ast)	19	<code>\curvearrowleft</code> (\curvearrowleft)	30
<code>\circleleft</code> ($\leftarrow\textcircled{\cdot}$)	29	<code>\coprod</code> (\coprod)	20	<code>\curvearrowleft</code> (\curvearrowleft)	30
<code>\circleleft</code> ($\leftarrow\textcircled{\cdot}$)	29	<code>\copyright</code> (\copyright)	7	<code>\curvearrowleft</code> (\curvearrowleft)	29
<code>\circleleft</code> ($\leftarrow\textcircled{\cdot}$)	29	<code>\corner</code> (\ulcorner)	13	<code>\curvearrowleft</code> (\curvearrowleft)	30
circles	53, 54, 56	<code>\Corresponds</code> (\cong)	43	<code>\curvearrowleft</code> (\curvearrowleft)	30
<code>\CircleShadow</code> ($\textcircled{\cdot}$)	53	<code>\corresponds</code> (\cong)	24	<code>\curvearrowright</code> (\curvearrowright)	30
<code>\CircleSolid</code> ($\textcircled{\bullet}$)	53	<code>\cos</code> (cos)	31, 70	<code>\curvearrowright</code> (\curvearrowright)	29
<code>\Circpipe</code> ($\textcircled{ }$)	47	<code>\cosh</code> (cosh)	31	<code>\curvearrowright</code> (\curvearrowright)	29
<code>\circplus</code> ($\textcircled{+}$)	19	<code>\cot</code> (cot)	31	<code>\Cutleft</code> ($\text{\textcircled{<}}$)	49
<code>\Circsteel</code> ($\textcircled{\bullet}$)	47	<code>\coth</code> (coth)	31	<code>\Cutline</code> ($\text{\textcircled{---}}$)	49
circumflex	<i>see</i> accents	<code>\counterplay</code> (\leftrightarrow)	59	cutoff subtraction	<i>see</i> <code>\dotdiv</code>
<code>\CleaningA</code> (\textcircled{A})	57	Courier (PostScript font)	14	<code>\Cutright</code> ($\text{\textcircled{>}}$)	49
<code>\CleaningF</code> (\textcircled{F})	57	CP1252	73		
<code>\CleaningFF</code> (\textcircled{F})	57	<code>\CR</code> ($\text{\textcircled{R}}$)	47		
<code>\CleaningP</code> (\textcircled{P})	57	<code>\Cross</code> (\times)	53		
<code>\CleaningPP</code> (\textcircled{P})	57	<code>\Cross</code> (\dagger vs. \dagger vs. \times)	61		
<code>\clickb</code> (\textcircled{b})	10	<code>\Cross</code> (\dagger)	57		
<code>\clickc</code> (\textcircled{c})	10	<code>\Cross</code> (\dagger)	50		
<code>\clickt</code> (\textcircled{t})	10	<code>\crossb</code> ($\text{\textcircled{b}}$)	10		
<code>\clock</code> ($\textcircled{\text{C}}$)	56	<code>\CrossBoldOutline</code> ($\text{\textcircled{\dagger}}$)	50		
clock symbols	58	<code>\CrossClowerTips</code> ($\text{\textcircled{\dagger}}$)	50		
<code>\Clocklogo</code> ($\textcircled{\text{C}}$)	54	<code>\crossd</code> ($\text{\textcircled{d}}$)	10		
<code>\closedniomega</code> (ω)	10	<code>\Crossedbox</code> ($\text{\textcircled{\times}}$)	54		
<code>\closedrepsilon</code> (ϵ)	10	crosses	50, 51, 57		
<code>\Cloud</code> ($\text{\textcircled{\text{C}}}$)	58	<code>\crossh</code> ($\text{\textcircled{h}}$)	10		
clovers	52	<code>\CrossMaltese</code> ($\text{\textcircled{\text{H}}}$)	50		
clubs (suit)	42, 55	<code>\crossnilambda</code> (λ)	10		
<code>\clubsuit</code> (\clubsuit)	42	<code>\CrossOpenShadow</code> ($\text{\textcircled{\dagger}}$)	50		
<code>\coAsterisk</code> ($\text{\textcircled{*}}$)	19	<code>\CrossOutline</code> ($\text{\textcircled{\dagger}}$)	50		
<code>\coasterisk</code> ($\text{\textcircled{*}}$)	19				
<code>\Coffeecup</code> ($\text{\textcircled{\text{C}}}$)	54				
<code>\colon</code>	41				

D

d (esvect package option)	40
<code>\d</code> (\blacksquare)	11
<code>\dag</code> (\dagger)	7
<code>\dagger</code> (\dagger)	17
<code>\daleth</code> (\aleph)	33
dangerous bend symbols	54
<code>\dasharrow</code>	<i>see</i> <code>\dashrightarrow</code>
<code>\dashint</code> (\int)	64
<code>\dashleftarrow</code> (\dashleftarrow)	29
<code>\dashleftarrow</code> (\dashleftarrow)	29
<code>\dashrightarrow</code> (\dashrightarrow)	29
<code>\DashV</code> (\Vdash)	24
<code>\Dashv</code> (\Vdash)	24
<code>\dashv</code> (\dashv)	23
<code>\dashv</code> (\dashv)	24
<code>\davidstar</code> ($\text{\textcircled{\star}}$)	51
<code>\DavidStar</code> ($\text{\textcircled{\star}}$)	52

<code>\DavidStarSolid</code> (★)	52	<code>\Diamond</code> (◇)	42	does not divide	<i>see</i> <code>\nmid</code>
<code>\dbar</code> (\overline{d})	63	<code>\Diamond</code> (◇)	42	does not exist	<i>see</i> <code>\nexists</code>
<code>\dbend</code> ($\overline{\curvearrowright}$)	54	<code>\diamond</code> (◇)	17	dollar	<i>see</i> <code>\textdollar</code>
<code>\DCa</code> ($\overleftarrow{\text{A}}$)	47	<code>\Diamondblack</code> (◆)	42	dollar sign	<i>see</i> <code>\\$</code>
<code>\DCb</code> ($\overrightarrow{\text{b}}$)	47	<code>\Diamonddot</code> (◇)	42	<code>\Dontwash</code> ($\overline{\text{W}}$)	57
<code>\DCc</code> (≡)	47	<code>\DiamonddotLeft</code> (⇐◇)	29	<code>\dot</code> (●)	37
<code>\DCd</code> (≡)	47	<code>\DiamonddotLeft</code> (⇐◇)	29	dot symbols	41
<code>\ddag</code> (§)	7	<code>\DiamonddotRight</code> (⇒◇)	29	<code>\dotcup</code> (∪)	63
<code>\ddagger</code> (§)	17	<code>\Diamonddotright</code> (⇒◇)	29	<code>\dotdiv</code> (÷)	19
<code>\ddashint</code> (∫)	64	<code>\DiamondLeft</code> (⇐◇)	29	<code>\Doteq</code>	<i>see</i> <code>\doteqdot</code>
<code>\ddddot</code> (⋮)	37	<code>\DiamondLeft</code> (⇐◇)	29	<code>\doteq</code> (≐)	23
<code>\dddot</code> (⋮)	37	<code>\DiamondRight</code> (⇒◇)	29	<code>\doteqdot</code> (≐)	23
<code>\ddot</code> (¨)	37	<code>\Diamondright</code> (⇒◇)	29	dotless <i>i</i> (<i>i</i>)	
<code>\ddots</code> (⋮)	41, 65	diamonds	53, 54	math mode	37, 42
<code>\DeclareFontFamily</code>	69	diamonds (suit)	42, 55	text mode	11
<code>\DeclareFontShape</code>	69	<code>\DiamondShadowA</code> (◇)	53	dotless <i>j</i> (<i>j</i>)	
<code>\DeclareMathOperator</code>	70, 71	<code>\DiamondShadowB</code> (◇)	53	math mode	37, 42
<code>\DeclareMathOperator*</code>	70, 71	<code>\DiamondShadowC</code> (◇)	53	text mode	11
<code>\declareslashed</code>	63	<code>\Diamondshape</code> (◇)	53	<code>\dotplus</code> (+)	19
definite-description operator (<i>ι</i>)	62	<code>\DiamondSolid</code> (◆)	53	<code>\dotplus</code> (+)	17
definition symbols	17, 66	<code>\diamondsuit</code> (◇)	42	<code>\dots</code> (...)	7
<code>\deg</code> (deg)	31	<code>\diatop</code>	13, 65	dots (ellipses)	7, 41, 42, 65
<code>\degree</code> (°)	42	<code>\diaunder</code>	13, 65	<code>\dotsb</code> (⋯)	41
<code>\degree</code> (°)	43	dice	59, 60	<code>\dotsc</code> (...)	41
degrees	<i>see</i> <code>\textdegree</code>	dictionary symbols	<i>see</i> phonetic symbols	<code>\dotseq</code> (≐)	24
<code>\DEL</code> (Δ)	47	died	<i>see</i> <code>\textdied</code>	<code>\dotsi</code> (⋯)	41
<code>\Deleatur</code>	<i>see</i> <code>\Denarius</code>	differential, inexact	<i>see</i> <code>\dbar</code>	<code>\dotsint</code> (∫⋯)	22
delimiters	34–36	<code>\digamma</code> (Ƴ)	32	<code>\dotsm</code> (⋯)	41
text-mode	36	digits	43	<code>\dotso</code> (...)	41
variable-sized	35, 36	circled	51	dotted union (∪)	70
<code>\Delta</code> (Δ)	32	LCD	45	<code>\dottimes</code> (×)	19
<code>\delta</code> (δ)	32	Mayan	43	<code>\double</code>	36
<code>\deltaup</code> (δ)	32	old-style	15	<code>\doublebarwedge</code> (⌘)	19
<code>\Denarius</code> (₰)	14	segmented	45	<code>\doublebarwedge</code> (⌘)	17
<code>\dental</code> (■)	13	<code>\dim</code> (dim)	31	<code>\doublecap</code>	<i>see</i> <code>\Cap</code>
derivative, partial	<i>see</i> <code>\partial</code>	<code>\ding</code>	8, 49–52, 54, 55	<code>\doublecap</code> (⋈)	19
<code>\descnode</code> (U)	45	dingautolist	51	<code>\doublecup</code>	<i>see</i> <code>\Cup</code>
<code>\det</code> (det)	31	dingbat (package)	50, 54, 61, 75, 76	<code>\doublecup</code> (∪)	19
<code>\devadvantage</code> (C)	59	dingbat symbols	49–55	<code>\doublepawns</code> (♞)	59
<code>\Dfourier</code> (∞)	25	discount	<i>see</i> <code>\textdiscount</code>	<code>\DOWNarrow</code> (▼)	56
<code>\dfourier</code> (∞)	25	<code>\displaystyle</code>	63–65, 71	<code>\Downarrow</code> (⇓)	28, 35
<code>\DFT</code> (■)	37	ditto marks	<i>see</i> <code>\textquotedbl</code>	<code>\downarrow</code> (↓)	70
<code>\dft</code> (■)	37	<code>\div</code> (÷)	17	<code>\downarrow</code> (↓)	28, 35
<code>\DH</code> (Ð)	8	<code>\divdot</code> (÷)	19	<code>\downbracketfill</code>	66
<code>\DH</code> (Ð)	8	<code>\divideontimes</code> (⋈)	19	<code>\downdownarrows</code> (⇓)	30
<code>\dh</code> (ð)	8	<code>\divideontimes</code> (⋈)	17	<code>\downdownarrows</code> (⇓)	29
<code>\dh</code> (ð)	8	<code>\divides</code> ()	24	<code>\downharpoonpoons</code> (⇓)	30
diacritics	<i>see</i> accents	division	17, 38	Downes, Michael J.	31, 75
diæresis	<i>see</i> accents	division times	<i>see</i> <code>\divideontimes</code>	<code>\downharpoonleft</code> (⇓)	30
<code>\diagdown</code> (↘)	42	divorced	<i>see</i> <code>\textdivorced</code>	<code>\downharpoonleft</code> (⇓)	29
<code>\diagdown</code> (↘)	42	<code>\DJ</code> (Ð)	8	<code>\downharpoonright</code> (⇓)	30
<code>\diagonal</code> (↗)	59	<code>\dj</code> (đ)	8	<code>\downharpoonright</code> (⇓)	29
<code>\diagup</code> (↗)	42	<code>\dlbari</code> (†)	10	<code>\downp</code> (˘)	13
<code>\diagup</code> (↗)	42	<code>\DLE</code> (►)	47	<code>\downparentfill</code>	66
<code>\diameter</code> (∅)	42	<code>\dlsh</code> (◄)	30	<code>\downt</code> (τ)	13
<code>\diameter</code> (∅)	56			<code>\downtouparrow</code> (U)	30
				<code>\downuparrows</code> (⇕)	30
				<code>\downupharpoons</code> (⇕)	30

`\drsh` (\hookrightarrow) 30
`dsfont` (package) 44, 75
`\dz` (\mathfrak{d}_3) 10

E

`e` (esvect package option) 40
`\e` (e) 34
 ε -TEX 35
`\Earth` (\oplus) 46
`\Earth` (δ) 46
`\earth` (δ) 45
`\Ecommerce` (\textcircled{e}) 14
`\EightAsterisk` ($\textcircled{8}$) 52
`\EightFlowerPetal` ($\textcircled{\text{fl}}_{\text{petal}}$) 52
`\EightFlowerPetalRemoved` ($\textcircled{\text{fl}}_{\text{petal}}^{\text{r}}$) 52
`\eighthnote` (♩) 56
`\EightStar` ($\textcircled{8}$) 52
`\EightStarBold` ($\textcircled{8}$) 52
`\EightStarConvex` ($\textcircled{8}$) 52
`\EightStarTaper` ($\textcircled{8}$) 52
`\ejective` (p) 10
electrical symbols 45
electromotive force (\mathcal{E}) *see*
 alphabets, math
`\ell` (ℓ) 33
`\Ellipse` (\bigcirc) 53
ellipses (dots) 7, 41, 42, 65
ellipses (ovals) 53
`\EllipseShadow` (\bigcirc) 53
`\EllipseSolid` (\bullet) 53
`\EM` (\downarrow) 47
`\Email` (✉) 47
`\Emailct` (✉) 47
`\emgma` (\mathfrak{m}) 11
`\emptyset` (\emptyset) 42
end of proof 42
`\ending` (\perp) 59
`\eng` (η) 10
engineering symbols 45, 47
`\engma` (\mathfrak{m}) 11
`\ENQ` (\clubsuit) 47
entails *see* `\models`
enter *see* carriage return
`\Envelope` (\boxtimes) 55
`\enya` (\mathfrak{n}) 11
`\EOT` (\blacklozenge) 47
`\epsi` (ε) 11
`\epsilon` (ϵ) 32
`\epsilonup` (ϵ) 32
`\eqbumped` (\asymp) 24
`\eqcirc` (\approx) 24
`\eqcirc` (\approx) 23
`\Eqcolon` (\asymp) 24
`\eqcolon` (\approx) 24
`\eqcolon` (\approx) 24

`\Eqqcolon` (\asymp) 24
`\eqqcolon` (\approx) 24
`\eqsim` (\approx) 24
`\eqslantgtr` (\gtrsim) 27
`\eqslantgtr` (\gtrsim) 27
`\eqslantless` (\lesssim) 27
`\eqslantless` (\lesssim) 27
`\equal` ($=$) 59
`\equalsfill` 17, 66
equilibrium *see*
 `\rightleftharpoons`
`\equiv` (\equiv) 17, 23
`\er` (er) 10
`\ESC` (\leftarrow) 47
escapable characters 7
`\esh` (f) 10
`\esh` (f) 11
`\esint` (package) 22, 75
`\Estatically` (E) 48
estimated .. *see* `\textestimated`
esvect (package) 40, 75
`\eta` (η) 32
`\etaup` (η) 32
`\ETB` (t) 47
`\etc` (ll) 59
`\eth` (ö) 42
`\eth` (ö) 10
`\eth` (ö) 11
`\ETX` (v) 47
eufrak (package) 44
Euler Roman 33
`\EUR` (€) 14
`\EURcr` (€) 14
`\EURdig` (€) 14
`\EURhv` (€) 14
`\euro` 14
euro signs 14
 blackboard bold 44
eurosym (package) 14, 75, 76
`\EURtm` (€) 14
euscript (package) 44, 75, 76
evaluated at (ll) 35
exclusive or 60
`\exists` (\exists) 34
`\exists` (\exists) 33
`\exp` (\exp) 31
`\Explosionsafe` (E) 48
extensible accents . 38–40, 65–66
extensible arrows 38–40
extensible tildes 38, 40
extension characters 30, 31
`\eye` (eye) 54
`\EyesDollar` ($\text{\$}$) 14

F

`f` (esvect package option) 40
`\fallingdotseq` (\fallingdotseq) 24
`\fallingdotseq` (\fallingdotseq) 23

`\FallingEdge` (L) 45
`\fatbslash` (\backslash) 18
`\fatsemi` (;) 18
`\fatslash` (ll) 18
`\FAX` (FAX) 47
`\fax` (fax) 47
`\Faxmachine` (fax) 47
fc (package) 8, 11
fclfont (package) 75
feet *see* `\prime` and
 `\textquotesingle`
`\FEMALE` (♀) 48
`\Female` (♀) 48
`\female` (♀) 47
`\FemaleFemale` (♀) 48
`\FemaleMale` (♀) 48
Feynman slashed character notation 63
`\FF` (f) 47
`\FHBLOGO` (f) 57
`\FHBLogo` (f) 57
`\file` (f) 59
`\FilledBigCircle` (\bullet) 53
`\FilledBigDiamondshape` (\blacklozenge) 53
`\FilledBigSquare` (\blacksquare) 53
`\FilledBigTriangleDown` (\blacktriangledown) 53
`\FilledBigTriangleLeft` (\blacktriangleleft) 53
`\FilledBigTriangleRight` (\blacktriangleright) 53
`\FilledBigTriangleUp` (\blacktriangleup) 53
`\FilledCircle` (\bullet) 53
`\FilledCloud` (cloud) 58
`\FilledDiamondShadowA` (\blacklozenge) 53
`\FilledDiamondShadowC` (\blacklozenge) 53
`\FilledDiamondshape` (\blacklozenge) 53
`\FilledHut` (hut) 58
`\FilledRainCloud` (rain) 58
`\FilledSectioningDiamond` (diamond) 59
`\FilledSmallCircle` (\bullet) 53
`\FilledSmallDiamondshape` (\blacklozenge) 53
`\FilledSmallSquare` (\blacksquare) 53
`\FilledSmallTriangleDown` (\blacktriangledown) 53
`\FilledSmallTriangleLeft` (\blacktriangleleft) 53
`\FilledSmallTriangleRight` (\blacktriangleright) 53
`\FilledSmallTriangleUp` (\blacktriangleup) 53
`\FilledSnowCloud` (snow) 58
`\FilledSquare` (\blacksquare) 53
`\FilledSquareShadowA` (\blacksquare) 53
`\FilledSquareShadowC` (\blacksquare) 53

`\filledsquarewithdots` (◼◼) . 54
`\FilledSunCloud` (☀) 58
`\FilledTriangleDown` (▼) . . . 53
`\FilledTriangleLeft` (◄) . . . 53
`\FilledTriangleRight` (►) . . . 53
`\FilledTriangleUp` (▲) 53
`\FilledWeakRainCloud` (☁) . . 58
`\fint` (f) 22
`\fint` (f) 22
`\Finv` (∓) 34
`\Finv` (∓) 33
`\Fire` (🔥) 59
fish hook *see* `\strictif`
`\FiveFlowerOpen` (🌸) 52
`\FiveFlowerPetal` (🌼) 52
`\FiveStar` (★) 52
`\FiveStarCenterOpen` (☆) . . . 52
`\FiveStarConvex` (★) 52
`\FiveStarLines` (☆) 52
`\FiveStarOpen` (☆) 52
`\FiveStarOpenCircled` (⬤) . . 52
`\FiveStarOpenDotted` (★) . . . 52
`\FiveStarOutline` (★) 52
`\FiveStarOutlineHeavy` (★) . 52
`\FiveStarShadow` (☆) 52
`\Fixedbearing` (↻) 47

`\fixedddots` (⋯) 41
`\fixedvdots` (⋮) 41
fixmath (package) 71
`\fj` (fj) 11
`\Flag` (🚩) 58
`\flap` (r) 11
`\flapr` (r) 10
`\flat` (b) 42, 56
`\Flatsteel` (—) 47
florin *see* `\textflorin`
flowers 52
`\Fog` (🌫) 58
font encodings 6
 7-bit 6
 8-bit 6
 ASCII 73
 document 73
 Latin 1 73
 limiting scope of 6
 LY1 6
 OT1 6, 8, 11, 71, 72
 OT2 62
 T1 6, 8, 11, 72, 73
 T4 8, 11
fontdef.dtx (file) 62, 65
fontenc (package) 6, 8, 11, 73
fontencoding 6

fonts, PostScript
 Courier 14
 Helvetica 14
 Symbol 33, 60
 Times 14
 Type 1 70
 Zapf Chancery 44
 Zapf Dingbats 49, 51
`\Football` (⚽) 54
`\forall` (∀) 33
`\Force` (↓) 47
`\Forward` (►) 57
`\ForwardToEnd` (▶) 57
`\ForwardToIndex` (▶▶) 57
`\FourAsterisk` (✱) 52
`\FourClowerOpen` (⚙) 52
`\FourClowerSolid` (⚙) 52
`\Fourier` (—○) 25
`\fourier` (○—) 25
Fourier transform (ℱ) *see*
 alphabets, math
`\FourStar` (✦) 52
`\FourStarOpen` (✧) 52
`\fourth` (Ⅳ) 42
fractions 43
fraktur *see* alphabets, math
`\frown` (⋪) 23
`\frownie` (☹) 56
`\Frowny` (☹) 57
`\FS` (L) 47
`\FullFHBO` (🏠) 57
`\fullmoon` (🌕) 46
`\fullmoon` (🌕) 45
`\fullnote` (♩) 56

G
`\G` (♠) 11
g (esvect package option) 40
`\Game` (♠) 34
`\Game` (♠) 33
`\Gamma` (Γ) 32
`\gamma` (γ) 32
`\gammaup` (γ) 32
`\gcd` (gcd) 31
`\ge` (≥) *see* `\geq`
`\Gemini` (♊) 46
`\Gemini` (♊) 46
`\gemini` (♊) 46
genealogical symbols 56
`\geneuro` (€) 14
`\geneuronarrow` (€) 14
`\geneurowide` (€) 14
gensymb (package) 43
`\Gentsroom` (♂) 54
geometric shapes 52–54
`\geq` (≥) 27
`\geq` (≥) 26, 27

`\geqq` (≥) 27
`\geqq` (≥) 27
`\geqslant` (≥) 27
`\gets` *see* `\leftarrow`
`\gg` (≫) 27
`\gg` (≫) 26
`\ggcurly` (≫) 24
`\ggg` (≫) 27
`\ggg` (≫ vs. ≫) 61
`\ggg` (≫) 27
`\gggtr` *see* `\ggg`
Gibbons, Jeremy 75
`\gimel` (ג) 33
`\girl` (👧) 46
`\glotstop` (ʔ) 10
`\glottal` (ʔ) 11
`\gluon` (🌀) 45
`\gnapprox` (≈) 27
`\gnapprox` (≈) 27
`\gneq` (≥) 27
`\gneq` (≥) 27
`\gneqq` (≈) 27
`\gneqq` (≈) 27
`\gnsim` (≈) 27
`\gnsim` (≈) 27
graphics (package) 62
graphicx (package) 62
`\grave` (̀) 37
greater-than signs *see* inequalities
Greek 32, 33
 blackboard bold 44
 bold 32, 71
 upright 32, 33
`\GS` (↔) 47
`\gtrapprox` (≈) 27
`\gtrapprox` (≈) 27
`\gtrdot` (⋗) 27
`\gtrdot` (⋗) 27
`\gtreqless` (≈) 27
`\gtreqless` (≈) 27
`\gtreqqlless` (≈) 27
`\gtreqqlless` (≈) 27
`\gtrless` (≥) 27
`\gtrless` (≥) 27
`\gtrsim` (≥) 27
`\gtrsim` (≥) 27
`\guillemotleft` («) 8, 74
`\guillemotright` (») 8, 74
`\guilsinglleft` (‹) 8
`\guilsinglright` (›) 8
`\gvertneqq` (≈) 27
`\gvertneqq` (≈) 27

H
`\H` (♠) 11
h (esvect package option) 40
háček *see* accents
`\Hail` (🌨) 58

\backslash HalfCircleLeft (\curvearrowleft) 53
 \backslash HalfCircleRight (\curvearrowright) 53
 \backslash HalfFilledHut ($\hat{\cup}$) 58
 \backslash halflength (\cdot) 13
 \backslash halfnote (\flat) 56
 \backslash HalfSun (\odot) 58
Hamiltonian (\mathcal{H}) . *see* alphabets, math
 \backslash HandCuffLeft (☞) 50
 \backslash HandCuffLeftUp (☞) 50
 \backslash HandCuffRight (☞) 50
 \backslash HandCuffRightUp (☞) 50
 \backslash HandLeft (☞) 50
 \backslash HandLeftUp (☞) 50
 \backslash HandPencilLeft (☞) 50
 \backslash HandRight (☞) 50
 \backslash HandRightUp (☞) 50
hands 50
 \backslash Handwash (☞) 57
harpoons 28–30
 \backslash hash ($\#$) 42
hash mark *see* \backslash #
 \backslash hat ($\hat{\cdot}$) 37
 \backslash hausab (B) 11
 \backslash hausab (b) 11
 \backslash hausad (D) 11
 \backslash hausad (d) 11
 \backslash hausak (K) 11
 \backslash hausak (k) 11
 \backslash HBar ($\overline{}$) 53
 \backslash hbar (\hbar) 33, 62
 \backslash Heart (\heartsuit) 57
hearts (suit) 42, 55
 \backslash heartsuit (\heartsuit) 42
Hebrew 33, 44
Helvetica (PostScript font) ... 14
 \backslash HERMAPHRODITE (♂) 48
 \backslash Hermaphrodite (♀) 48
 \backslash hexagon (\square) 52
 \backslash Hexasteel (⬢) 47
 \backslash hexstar (\star) 51
 \backslash HF (\approx) 45
Hilbert space (\mathcal{H}) . *see* alphabets, math
 \backslash hill (▣) 13
 \backslash hksqrt ($\sqrt{\text{▣}}$) 64
Holt, Alexander 1, 73
 \backslash hom (hom) 31
 \backslash hookb (b) 10
 \backslash hookd (d) 10
 \backslash hookd (d) 11
 \backslash hookg (g) 10
 \backslash hookh (h) 10
 \backslash hookheng (fj) 10
 \backslash hookleftarrow (\hookleftarrow) 28
 \backslash hookreversepsilon (g) 10

\backslash hookrightarrow (\hookrightarrow) 28
Horn, Berthold 44
 \backslash hslash (\hbar) 33
 \backslash HT (\circ) 47
Hungarian umlaut . . *see* accents
 \backslash Hut ($\hat{\cup}$) 58
 \backslash hv (h) 10

I

\backslash i (i) 11
 \backslash ibar (i) 11
IBM 47, 72
 \backslash IceMountain (⬆) 58
 \backslash iddots (\cdots) 41, 65
 \backslash idotsint ($\int\cdots\int$) 20, 22
 \backslash iff . *see* \backslash Longleftarrow
ifsym (package) 45, 53, 58, 59, 61, 75, 76
 \backslash iiint (\iiint) 20, 22
 \backslash iiint (\iiint) 22
 \backslash iiint (\iiint) 21
 \backslash iiint (\iiint) 20, 22
 \backslash iiint (\iiint) 22
 \backslash iint (\iint) 21
 \backslash iint (\iint) 20, 22
 \backslash iint (\iint) 22
 \backslash Im (\Im) 33
 \backslash im (j) 34
 \backslash imath (i) 33, 37
 \backslash impliedby . *see* \backslash Longleftarrow
 \backslash implies . *see* \backslash Longrightarrow
and \backslash vdash
 \backslash in (\in) 34
 \backslash in (\in) 33
inches *see* \backslash second *and* \backslash textquotedbl
independence
 probabilistic 64
 statistical 64
 stochastic *see* \backslash bot
 \backslash independent (\perp) 64
 \backslash Industry (⚙) 54
inequalities 7, 26, 27
inexact differential . . . *see* \backslash dbar
 \backslash inf (inf) 31
 \backslash Info (I) 54
information symbols 54
informer symbols 59
 \backslash infty (∞) 42
 \backslash infty (∞) 42
 \backslash injlil (injlil) 31
 \backslash inplus (€) 23
 \backslash int (\int) 21
 \backslash int (\int) 20
integers (\mathbb{Z}) . *see* alphabets, math
integrals 20–22, 63–64
 \backslash intercal (†) 17

\backslash interleave (|||) 18
intersection *see* \backslash cap
 \backslash Interval (⌚) 58
 \backslash inva (v) 10
 \backslash invamp (X) 18
 \backslash invdiameter (⊗) 56
 \backslash inve (a) 8
 \backslash InversTransformHoriz (↔) 25
 \backslash InversTransformVert (↕) . . 25
 \backslash invf (j) 10
 \backslash invglotstop (b) 10
 \backslash invh (q) 10
 \backslash invlegr (l) 10
 \backslash invm (u) 10
 \backslash invneg (r) 23
 \backslash invr (i) 10
 \backslash invscr (B) 10
 \backslash invscripta (p) 10
 \backslash invv (A) 10
 \backslash invw (M) 10
 \backslash invy (X) 10
 \backslash iota (ι) 32
 \backslash iotaup (i) 32
 \backslash ipagamma (y) 10
 \backslash IroningI (⌘) 57
 \backslash IroningII (⌘) 57
 \backslash IroningIII (⌘) 57
 \backslash Irritant (X) 59
 \backslash ismodeledby (=|) 62
ISO character entities 73
isoent (package) 73

J

\backslash j (j) 11
 \backslash JackStar (♣) 52
 \backslash JackStarBold (♣) 52
Jewish star 51, 52
 \backslash jmath (j) 33, 37
 \backslash Joch (J) 58
 \backslash Join (⋈) 23
 \backslash joinrel 62
 \backslash Jupiter (♃) 46
 \backslash Jupiter (♃) 46
 \backslash jupiter (♃) 45

K

\backslash k (k) 11
 \backslash kappa (κ) 32
 \backslash kappaup (κ) 32
 \backslash ker (ker) 31
 \backslash Keyboard (⌨) 47
king *see* chess symbols
knight *see* chess symbols
Knuth, Donald E. 6, 71, 75
 symbols by 54, 56
 \backslash kreuz (✝) 56
 \backslash kside (⋈) 59
 \backslash Kutline (--) 49

L					
<code>\L</code> (\mathbb{L})	8	<code>\leftarrow</code> (\leftarrow)	28	<code>\lesseqgtr</code> (\lesseqgtr)	27
<code>\l</code> (\mathbb{l})	8	<code>\leftarrowtail</code> (\leftarrowtail)	29	<code>\lesseqqgtr</code> (\lesseqqgtr)	27
<code>\labdentalnas</code> (\mathfrak{m})	10	<code>\leftarrowtriangle</code> (\leftarrowtriangle)	29	<code>\lesseqqgtr</code> (\lesseqqgtr)	27
<code>\labvel</code>	13	<code>\leftbarharpoon</code> (\leftharpoonup)	30	<code>\lessgtr</code> (\lessgtr)	27
<code>\Ladiesroom</code> (\mathfrak{f})	54	<code>\LEFTCIRCLE</code> (\mathbb{C})	56	<code>\lessgtr</code> (\lessgtr)	27
Lagrangian (\mathcal{L})	<i>see</i> alphabets, math	<code>\LEFTcircle</code> (\mathbb{O})	56	<code>\lesssim</code> (\lesssim)	27
<code>\Lambda</code> (Λ)	32	<code>\Leftcircle</code> (\mathbb{Q})	56	<code>\lesssim</code> (\lesssim)	27
<code>\lambda</code> (λ)	32	<code>\leftharpoondown</code> (\leftharpoondown)	30	<code>\Letter</code> (\boxtimes)	59
<code>\lambdabar</code> ($\bar{\lambda}$)	42	<code>\leftharpoondown</code> (\leftharpoondown)	28	<code>\Letter</code> (\boxtimes vs. \boxtimes)	61
<code>\lambdaslash</code> (λ)	42	<code>\leftharpoonup</code> (\leftharpoonup)	30	<code>\Letter</code> (\boxtimes)	47
<code>\lambdaup</code> (λ)	32	<code>\leftharpoonup</code> (\leftharpoonup)	28	letter-like symbols	33, 34
Lamport, Leslie	73, 75	<code>\leftleftarrows</code> (\leftleftarrows)	30	letters	<i>see</i> alphabets
<code>\land</code>	<i>see</i> <code>\wedge</code>	<code>\leftleftarrows</code> (\leftleftarrows)	29	barred	62
<code>\landdownint</code> (\int)	22	<code>\leftrightarpoons</code> (\leftrightarpoons)	30	non-ASCII	8
<code>\landupint</code> (\int)	22	<code>\leftmoon</code> (\mathbb{C})	46	slashed	63
<code>\Langle</code> (\langle)	44	<code>\leftmoon</code> (\mathbb{C})	45	variant Latin	33
<code>\lAngle</code> (\langle)	36	<code>\lefttp</code> (\mathbb{C})	13	<code>\LF</code> (\mathbb{C})	47
<code>\langle</code> (\langle)	35	<code>\leftpointright</code> (\mathbb{C})	50	<code>\lfilet</code> (\mathbb{C})	35
<code>\Laplace</code> ($\bullet\!\!\!\circ$)	25	<code>\Leftrightarrow</code> (\Leftrightarrow)	28	<code>\lFloor</code> (\mathbb{C})	36
<code>\laplace</code> ($\circ\!\!\!\bullet$)	25	<code>\leftrightharpoonup</code> (\leftrightharpoonup)	30	<code>\lfloor</code> (\mathbb{C})	35
Laplace transform (\mathcal{L})	<i>see</i> alphabets, math	<code>\leftrightharpoonup</code> (\leftrightharpoonup)	28	<code>\lg</code> (\lg)	31
<code>\largepencil</code> (\mathbb{C})	50	<code>\leftrightharroweq</code> (\leftrightharroweq)	29	<code>\lggroup</code> (\mathbb{C})	35
<code>\larrowfill</code>	39	<code>\leftrightharrows</code> (\leftrightharrows)	30	<code>\LHD</code> (\mathbb{C})	18
<code>\Laserbeam</code> (\mathbb{C})	48	<code>\leftrightharrows</code> (\leftrightharrows)	29	<code>\lhd</code> (\mathbb{C})	17, 18
<code>\LaTeX</code> 1, 6, 31, 35, 39, 41, 42, 49, 59, 60, 62–67, 70–73, 75		<code>\leftrightharpoons</code> (\leftrightharpoons)	30	<code>\lhd</code> (\mathbb{C})	54
<code>\LaTeX</code> 2 ϵ	1, 6, 7, 15, 17, 23, 25, 28, 37, 41, 42, 44, 57, 60–62, 64, 65, 69–75	<code>\leftrightharpoons</code> (\leftrightharpoons)	29	<code>\Libra</code> (\mathbb{C})	46
<code>\latexsym</code> (package)	17, 23, 25, 28, 42, 60, 75, 76	<code>\leftrightsquigarrow</code> (\leftrightsquigarrow)	30	<code>\libra</code> (\mathbb{C})	46
<code>\latfric</code> (\mathfrak{f})	10	<code>\leftrightsquigarrow</code> (\leftrightsquigarrow)	29	<code>\lightbulb</code> (\mathfrak{g})	69
Latin 1	6, 73	<code>\Leftscissors</code> (\mathbb{C})	49	<code>\lightbulb.mf</code> (file)	67, 68
table	74	<code>\leftslice</code> (\mathbb{C})	18	<code>\lightbulb.sty</code> (file)	69, 70
laundry symbols	57	<code>\leftsquigarrow</code> (\leftsquigarrow)	30	<code>\lightbulb10.2602gf</code> (file)	68
<code>\Lbag</code> (\mathbb{C})	34	<code>\leftsquigarrow</code> (\leftsquigarrow)	29	<code>\lightbulb10.dvi</code> (file)	68
<code>\lbag</code> (\mathbb{C})	34	<code>\lefttt</code> (\mathbb{C})	13	<code>\lightbulb10.mf</code> (file)	67–69
<code>\lbbbbrack</code> (\mathbb{C})	35	<code>\leftthreetimes</code> (\mathbb{C})	42	<code>\lightbulb10.tfm</code> (file)	69
<code>\Lbrack</code> (\mathbb{C})	44	<code>\leftthreetimes</code> (\mathbb{C})	17	<code>\Lightning</code> (\mathfrak{f} vs. \mathfrak{f})	61
<code>\lBrack</code> (\mathbb{C})	36	<code>\leftthumbsdown</code> (\mathbb{C})	50	<code>\Lightning</code> (\mathfrak{f})	47
LCD digits	45	<code>\leftthumbsup</code> (\mathbb{C})	50	<code>\Lightning</code> (\mathfrak{f})	58
<code>\lCeil</code> (\mathbb{C})	36	<code>\lefttorightarrow</code> (\mathbb{C})	30	<code>\lightning</code> (\mathfrak{f} vs. \mathfrak{f})	61
<code>\lceil</code> (\mathbb{C})	35	<code>\Lefttorque</code> (\mathbb{C})	47	<code>\lightning</code> (\mathfrak{f})	29
<code>\lcm</code> (\mathbb{C})	70	<code>\leftturn</code> (\mathbb{C})	56	<code>\lightning</code> (\mathfrak{f})	56
<code>\lcorners</code> (\mathbb{C})	34	<code>\legm</code> (\mathfrak{u})	10	<code>\lim</code> (\lim)	31, 70
<code>\ldotp</code> (\mathbb{C})	41	<code>\legr</code> (\mathfrak{r})	10	<code>\liminf</code> (\liminf)	31, 71
<code>\ldots</code> (\mathbb{C})	41	<code>\length</code> (\mathfrak{i})	13	limits	31
<code>\le</code>	<i>see</i> <code>\leq</code>	<code>\Leo</code> (\mathfrak{L})	46	<code>\limsup</code> (\limsup)	31, 71
<code>\leadsto</code> (\leadsto)	23, 28	<code>\leo</code> (\mathfrak{L})	46	linear implication	<i>see</i> <code>\multimap</code>
leaf	<i>see</i> <code>\textleaf</code>	<code>\leq</code> (\leq)	27	<code>\Lineload</code> (\mathbb{C})	47
<code>\left</code>	35, 36	<code>\leq</code> (\leq)	26, 27	linguistic symbols	8–11
<code>\LEFTarrow</code> (\mathbb{C})	56	<code>\leqq</code> (\leqq)	27	<code>\lJoin</code> (\mathbb{C})	24
<code>\Leftarrow</code> (\Leftarrow)	17, 28	<code>\leqq</code> (\leqq)	27	<code>\ll</code> (\ll)	27
<code>\leftarrow</code> (\leftarrow)	30	<code>\leqq</code> (\leqq)	27	<code>\ll</code> (\ll)	26
		<code>\leqslant</code> (\leqslant)	27	<code>\llap</code>	64
		less-than signs	<i>see</i> inequalities	<code>\llbracket</code> (\mathbb{C})	35
		<code>\lessapprox</code> (\lessapprox)	27	<code>\llceil</code> (\mathbb{C})	34
		<code>\lessapprox</code> (\lessapprox)	27	<code>\llcorner</code> (\mathbb{C})	34
		<code>\lessdot</code> (\lessdot)	27	<code>\llcorner</code> (\mathbb{C})	34
		<code>\lessdot</code> (\lessdot)	27	<code>\llcurly</code> (\llcurly)	24
		<code>\lesseqgtr</code> (\lesseqgtr)	27		

\Lleftarrow (\Leftarrow) 29
 \llfloor (\ll) 34
 \lll (\lll) 27
 \lll (\lll vs. \lll) 61
 \lll (\lll) 27
 \llless *see* \lll
 \llparenthesis (\ll) 34
 \lmoustache (\int) 35
 \ln (\ln) 31
 \lnapprox (\approx) 27
 \lnapprox (\approx) 27
 \lneq (\lessdot) 27
 \lneq (\lessdot) 27
 \lneqq (\lessgtr) 27
 \lneqq (\lessgtr) 27
 \lnot *see* \neg
 \lnsim (\sim) 27
 \lnsim (\sim) 27
local ring (\mathcal{O}) *see* alphabets, math
 \log (\log) 31, 70
log-like symbols 31, 71
logical operators
 and *see* \wedge
 not *see* \neg and \sim
 or *see* \vee
 \logof (\otimes) 23
lollipop *see* \multimap
long division 38
 \Longleftarrow (\Leftarrow) 28
 \longleftarrow (\Leftarrow) 28
 \Longletrightarrow 57
 \Longleftrightharpoonup (\Leftrightarrow) 28
 \longleftrightharpoonup (\Leftrightarrow) 28
 \Longmapsfrom (\Leftarrow) 29
 \longmapsfrom (\Leftarrow) 29
 \Longmapsto (\Rightarrow) 29
 \longmapsto (\Rightarrow) 28
 \LongPulseHigh (\sqcup) 45
 \LongPulseLow (\sqcap) 45
 \Longrightarrow (\Rightarrow) 28
 \longrightarrow (\Rightarrow) 28
 \looparrowleft (\hookleftarrow) 30
 \looparrowright (\hookrightarrow) 30
 \looparrowleft (\hookleftarrow) 29
 \looparrowright (\hookrightarrow) 30
 \looparrowright (\hookrightarrow) 29
 \Loosebearing (\triangle) 47
 \lor *see* \vee
 \LowerDiamond (\blacklozenge) 53
lowering *see* $\textit{lowering}$
 \lozenge (\lozenge) 42
 \Lparen (\Lparen) 44
 \lrcorner (\lrcorner) 34
 \lrcorner (\lrcorner) 34
 \lrJoin *see* \Join
 \lrtimes (\rtimes) 24
 \Lsh (\lsh) 30

\Lsh (\lsh) 29
 \Lsteel (\L) 47
 \ltimes (\ltimes) 19
 \ltimes (\ltimes) 17
 \ltriple 36
Luecking, Dan 64
 \lVert (\lVert) 36
 \lvertneqq (\nlessgtr) 27
 \lvertneqq (\nlessgtr) 27
 \lz (\mathfrak{k}) 10

M

\mathcal{M} 8
 \mathcal{m} 8
macron *see* accents
majuscules 32
 \makeatletter 65
 \makeatother 65
 MALE (MALE) 48
 Male (Male) 48
 male (male) 47
 MaleMale (MaleMale) 48
 maltese (maltese) 16
 manboldkidney (manboldkidney) 56
 $\text{manconcentriccircles}$ ($\text{manconcentriccircles}$) 56
 $\text{manconcentricdiamond}$ ($\text{manconcentricdiamond}$) 56
 mancone (mancone) 56
 mancube (mancube) 56
 manerrarrow (manerrarrow) 56
 $\text{manfilledquartercircle}$ ($\text{manfilledquartercircle}$) 56
 manfnt (package) .. 54, 56, 75, 76
 manhpennib (manhpennib) 56
 manimpossiblecube (manimpossiblecube) 56
 mankidney (mankidney) 56
 manlhpenkidney (manlhpenkidney) 56
 manpenkidney (manpenkidney) 56
 manquadrifolium (manquadrifolium) 56
 manquartercircle (manquartercircle) 56
 $\text{manrotatedquadrifolium}$ ($\text{manrotatedquadrifolium}$) 56
 $\text{manrotatedquartercircle}$ ($\text{manrotatedquartercircle}$) 56
 manstar (manstar) 56
 mantilt pennib (mantilt pennib) 56
 mantriangledown (mantriangledown) 56
 mantriangleright (mantriangleright) 56
 mantriangleup (mantriangleup) 56
 manvpennib (manvpennib) 56
 Mappedfromchar (Mappedfromchar) 31
 Mappedfromchar (Mappedfromchar) 31
 Mapsfrom (Mapsfrom) 29
 Mapsfrom (Mapsfrom) 29
 Mapsfromchar (Mapsfromchar) 31
 Mapsfromchar (Mapsfromchar) 31
 Mapsfromchar (Mapsfromchar) 31
 Mapsfromchar (Mapsfromchar) 31
 Mapsto (Mapsto) 29
 mapsto (mapsto) 28
 Mapstochar (Mapstochar) 31
 Mapstochar (Mapstochar) 31

mapstochar (mapstochar) 31
 markera (markera) 59
 markerb (markerb) 59
married *see* $\textit{textmarried}$
 Mars (Mars) 46
 Mars (Mars) 46
 mars (mars) 45
 MartinVogel (MartinVogel) 57
 marvosym (package) 14, 43, 46–49,
 54, 57, 61
 matbbol (package) 44
 mate (mate) 59
math alphabets 44
 mathabx (package) 19, 21, 23–28,
 30, 31, 34, 35, 37, 40, 42, 43,
 46, 54, 60, 61, 75, 77
 mathaccent 63
 mathbb 44
 mathbbm 44
 mathbbmss 44
 mathbbmtt 44
 mathbbol (package) 44
 mathbf 71
 mathbin 70
 mathbold 71
 mathcal (euscript package option)
 44
 mathcal 44
 mathcent (mathcent) 34
 mathchoice 63, 64
 mathclose 70
 mathcomp (package) 43
 mathdots (package) 41, 65, 75, 76
 mathds 44
mathematical symbols ... 17–44
 mathfrak 44
 mathit 44
 mathnormal 44
 mathop 70
 mathopen 70
 mathord 70
 mathpalette 64
 mathpunct 70
 mathpzc 44
 mathrel 62, 70
 mathring (mathring) 37
 mathrm 44
 mathrsfs (package) 44, 75
 mathscr (euscript package option)
 44
 mathscr 44
 mathsterling (mathsterling) 34
 max (max) 31
 maya 43
 mbboard (package) 44, 75
 mbox 64
 measuredangle (measuredangle) 42
 measuredangle (measuredangle) 42

mechanical scaling 67, 69
 $\backslash medbullet$ (●) 18
 $\backslash medcirc$ (○) 18
 $\backslash Mercury$ (♿) 46
 $\backslash Mercury$ (♿) 46
 $\backslash mercury$ (♿) 45
 $\backslash merge$ (⋈) 18
METAFONT 44, 67, 68, 70
METAFONTbook symbols 56
 $\backslash mho$ (Ω) 42
micro *see* $\backslash textmu$
 $\backslash micro$ (μ) 43
Microsoft Windows 73
 $\backslash mid$ (|) 23
 $\backslash middle$ 35
 $\backslash midtilde$ (∼) 13
 $\backslash min$ (min) 31, 70
minus *see* $\backslash textminus$
 $\backslash minuso$ (⊖) 18
minutes, angular *see* $\backslash prime$
miscellaneous symbols 42, 54–59
“Missing \$ inserted” 17
 $\backslash Mmappedfromchar$ (Ⓜ) 31
 $\backslash mmappedfromchar$ (Ⓜ) 31
 $\backslash Mmapstochar$ (Ⓜ) 31
 $\backslash mmapstochar$ (Ⓜ) 31
 $\backslash Mobilefone$ (☎) 47
 $\backslash mod$ 31
 $\backslash models$ (|=) 23, 62
moduli space *see* alphabets, math
monetary symbols 14, 44
 $\backslash moo$ (±) 18
 $\backslash Moon$ (♄) 46
 $\backslash Moon$ (♄) 46
 $\backslash morepawns$ (>) 59
 $\backslash moreroom$ (○) 59
 $\backslash Mountain$ (▲) 58
mouse *see* $\backslash ComputerMouse$
 $\backslash MoveDown$ (▼) 57
 $\backslash moverlay$ 65
 $\backslash MoveUp$ (▲) 57
 $\backslash mp$ (⊢) 17
 $\backslash mu$ (μ) 32
 $\backslash multimap$ (→) 23, 24
 $\backslash multimapboth$ (↔) 24
 $\backslash multimapbothvert$ (⋈) 24
 $\backslash multimapdot$ (→) 24
 $\backslash multimapdotboth$ (↔) 24
 $\backslash multimapdotbothA$ (↔) 24
 $\backslash multimapdotbothAvert$ (⋈) 24
 $\backslash multimapdotbothB$ (↔) 24
 $\backslash multimapdotbothBvert$ (⋈) 24
 $\backslash multimapdotbothvert$ (⋈) 24
 $\backslash multimapdotinv$ (→) 24
 $\backslash multimapinv$ (→) 24
multiple accents per character 65
 $\backslash Mundus$ (♁) 57
musical notes 15, 42, 56

$\backslash muup$ (μ) 32
 $\backslash MVAt$ (@) 57
 $\backslash MVEight$ (8) 43
 $\backslash MVFive$ (5) 43
 $\backslash MVFour$ (4) 43
 $\backslash MVNine$ (9) 43
 $\backslash MVOne$ (1) 43
 $\backslash MVSeven$ (7) 43
 $\backslash MVSix$ (6) 43
 $\backslash MVThree$ (3) 43
 $\backslash MVTwo$ (2) 43
 $\backslash MVZero$ (0) 43

N

$\backslash nabla$ (∇) 42
 $\backslash NAK$ (§) 47
 $\backslash napprox$ (≈) 25
 $\backslash napproxeq$ (≈) 24
 $\backslash nasymp$ (≈) 24
nath (package) 34, 36, 75
 $\backslash natural$ (h) 42, 56
natural numbers (ℕ) *see*
 alphabets, math
navigation symbols 57
 $\backslash nbacksim$ (↯) 24
 $\backslash nbacksimeq$ (≈) 24
 $\backslash nBumpeq$ (≉) 24
 $\backslash nbumpeq$ (≉) 24
 $\backslash ncong$ (≇) 25
 $\backslash ncong$ (≇) 23
 $\backslash ncurlyeqprec$ (≲) 25
 $\backslash ncurlyeqsucc$ (≳) 25
 $\backslash nDashV$ (⧻) 25
 $\backslash nDashv$ (⧻) 25
 $\backslash ndashV$ (⧻) 25
 $\backslash ndashv$ (⧻) 25
 $\backslash ndashVv$ (⧻) 25
 $\backslash ne$ *see* $\backslash neq$
 $\backslash Narrow$ (↗) 29
 $\backslash narrow$ (↗) 30
 $\backslash narrow$ (↗) 28, 64, 65
 $\backslash neg$ (¬) 42
negation *see* $\backslash neg$ and $\backslash sim$
 $\backslash Neptune$ (♆) 46
 $\backslash Neptune$ (♆) 46
 $\backslash neptune$ (♆) 45
 $\backslash neq$ (≠) 25
 $\backslash neq$ (≠) 26
 $\backslash neqslantgtr$ (≷) 27
 $\backslash neqslantless$ (≶) 27
 $\backslash nequiv$ (≡) 24
 $\backslash neswarrow$ (↘) 64, 65
 $\backslash Neutral$ (○) 48
 $\backslash newmoon$ (☾) 46
 $\backslash newmoon$ (☾) 45
 $\backslash newtie$ (■) 11
 $\backslash nexists$ (‡) 34
 $\backslash nexists$ (‡) 33
 $\backslash NG$ (I) 8

$\backslash ng$ (η) 8
 $\backslash ngeq$ (≧) 27
 $\backslash ngeq$ (≧) 27
 $\backslash ngeqq$ (≧) 27
 $\backslash ngeqq$ (≧) 27
 $\backslash ngeqslant$ (≧) 27
 $\backslash ngg$ (≧) 27
 $\backslash ngtr$ (≧) 27
 $\backslash ngtr$ (≧) 27
 $\backslash ngtrapprox$ (≧) 27
 $\backslash ngtrapprox$ (≧) 27
 $\backslash ngtrless$ (≧) 27
 $\backslash ngtrsim$ (≧) 27
 $\backslash ngtrsim$ (≧) 27
 $\backslash ni$ (∋) 33
 $\backslash nialpha$ (α) 10
 $\backslash nibar$ *see* $\backslash ownsbar$
 $\backslash nibeta$ (β) 10
 $\backslash NibLeft$ (↵) 50
 $\backslash NibRight$ (↵) 50
nibs 50
 $\backslash NibSolidLeft$ (↵) 50
 $\backslash NibSolidRight$ (↵) 50
nicefrac (package) 43, 75, 76
 $\backslash nich$ (χ) 10
 $\backslash niepsilon$ (ε) 10
 $\backslash nigamma$ (γ) 10
 $\backslash niota$ (ι) 10
 $\backslash nilambda$ (λ) 10
 $\backslash niomega$ (ω) 10
 $\backslash nipi$ (φ) 10
 $\backslash niplus$ (⊕) 23
 $\backslash nisigma$ (σ) 10
 $\backslash nitheta$ (θ) 10
 $\backslash niupsilon$ (υ) 10
 $\backslash niv$ (L) 34
 $\backslash nj$ (j) 10
 $\backslash nLeftarrow$ (⇐) 30
 $\backslash nLeftarrow$ (⇐) 29
 $\backslash nleftarrow$ (⇐) 30
 $\backslash nleftarrow$ (⇐) 29
 $\backslash nLeftrightarrow$ (⇔) 30
 $\backslash nLeftrightarrow$ (⇔) 29
 $\backslash nleftrightarrow$ (↔) 30
 $\backslash nleftrightarrow$ (↔) 17, 29
 $\backslash nleq$ (≦) 27
 $\backslash nleq$ (≦) 27
 $\backslash nleqq$ (≦) 27
 $\backslash nleqq$ (≦) 27
 $\backslash nleqslant$ (≦) 27
 $\backslash nless$ (≦) 27
 $\backslash nless$ (≦) 27
 $\backslash nlessapprox$ (≦) 27
 $\backslash nlessapprox$ (≦) 27
 $\backslash nlessgtr$ (≷) 27
 $\backslash nlesssim$ (≷) 27
 $\backslash nlesssim$ (≷) 27

<code>\nll</code> (\ll)	27
<code>\nmid</code> (\nmid)	23
<code>\nnearrow</code> (\nearrow)	29
<code>\nnwarrow</code> (\nwarrow)	29
<code>\NoBleech</code> (\triangle)	57
<code>\NoChemicalCleaning</code> (\odot)	57
<code>\NoIroning</code> (\triangle)	57
<code>\NoSun</code> (\bullet)	58
<code>not</code>	<i>see</i> <code>\neg</code>
<code>\not</code>	25
<code>not equal</code> (\neq vs. \neq)	25
<code>\notasymp</code> (\asymp)	25
<code>\notbackslash</code> (\nbackslash)	46
<code>\notbot</code> (\bot)	34
<code>\notdivides</code> (\nmid)	25
<code>\notequiv</code> ($\not\equiv$)	25
<code>\notin</code> (\notin)	34
<code>\notin</code> (\notin)	34
<code>\notin</code> (\notin)	34
<code>\notowner</code> (\notin)	34
<code>\notowns</code>	<i>see</i> <code>\notowner</code> and <code>\notni</code>
<code>\notni</code>	
<code>\notperp</code> (\nperp)	25
<code>\notslash</code> (\nmid)	46
<code>\nottop</code> (\nmid)	34
<code>\NoTumbler</code> (\boxtimes)	57
<code>\novelty</code> (\mathbb{N})	59
<code>\nparallel</code> (\nparallel)	23
<code>\nplus</code> (\nplus)	18
<code>\nprec</code> (\nprec)	25
<code>\nprec</code> (\nprec)	23
<code>\nprecapprox</code> (\nprecapprox)	25
<code>\nprecapprox</code> (\nprecapprox)	24
<code>\npreccurlyeq</code> (\npreccurlyeq)	25
<code>\npreccurlyeq</code> (\npreccurlyeq)	24
<code>\npreceq</code> (\npreceq)	25
<code>\npreceq</code> (\npreceq)	23
<code>\npreceqq</code> (\npreceqq)	24
<code>\nprecsim</code> (\nprecsim)	25
<code>\nprecsim</code> (\nprecsim)	24
<code>\nrightarrow</code> (\nrightarrow)	30
<code>\nrightarrow</code> (\nrightarrow)	29
<code>\nrightarrow</code> (\nrightarrow)	30
<code>\nrightarrow</code> (\nrightarrow)	29
<code>\nshortmid</code> (\nmid)	23
<code>\nshortparallel</code> (\nparallel)	23
<code>\nsim</code> (\nsim)	25
<code>\nsim</code> (\nsim)	23
<code>\nsimeq</code> (\nsimeq)	25
<code>\nsimeq</code> (\nsimeq)	24
<code>\nsqSubset</code> (\nsqSubset)	26
<code>\nsqsubset</code> (\nsqsubset)	26
<code>\nsqsubset</code> (\nsqsubset)	26
<code>\nsqsubseq</code> (\nsqsubseq)	26
<code>\nsqsubseq</code> (\nsqsubseq)	26
<code>\nsqsubseq</code> (\nsqsubseq)	26
<code>\nsqsubseq</code> (\nsqsubseq)	26
<code>\nsqsupset</code> (\nsqsupset)	26
<code>\nsqsupset</code> (\nsqsupset)	26

<code>\nsqsupset</code> (\nsqsupset)	26
<code>\nsqsupseteq</code> (\nsqsupseteq)	26
<code>\nsqsupseteq</code> (\nsqsupseteq)	26
<code>\nsqsupseteq</code> (\nsqsupseteq)	26
<code>\nSubset</code> (\nSubset)	26
<code>\nSubset</code> (\nSubset)	26
<code>\nsubset</code> (\nsubset)	26
<code>\nsubseteq</code> (\nsubseteq)	26
<code>\nsubseteq</code> (\nsubseteq)	26
<code>\nsubseteq</code> (\nsubseteq)	26
<code>\nsubseteq</code> (\nsubseteq)	26
<code>\nsucc</code> (\nsucc)	25
<code>\nsucc</code> (\nsucc)	23
<code>\nsuccapprox</code> (\nsuccapprox)	25
<code>\nsuccapprox</code> (\nsuccapprox)	24
<code>\nsucccurlyeq</code> (\nsucccurlyeq)	25
<code>\nsucccurlyeq</code> (\nsucccurlyeq)	24
<code>\nsucceq</code> (\nsucceq)	25
<code>\nsucceq</code> (\nsucceq)	23
<code>\nsucceqq</code> (\nsucceqq)	24
<code>\nsuccsim</code> (\nsuccsim)	25
<code>\nsuccsim</code> (\nsuccsim)	24
<code>\nSupset</code> (\nSupset)	26
<code>\nSupset</code> (\nSupset)	26
<code>\nsupset</code> (\nsupset)	26
<code>\nsupseteq</code> (\nsupseteq)	26
<code>\nsupseteq</code> (\nsupseteq)	26
<code>\nsupseteq</code> (\nsupseteq)	26
<code>\nsupseteq</code> (\nsupseteq)	26
<code>ntheorem</code> (package)	42
<code>\nthickapprox</code> (\nthickapprox)	24
<code>\ntriangleleft</code> (\ntriangleleft)	28
<code>\ntriangleleft</code> (\ntriangleleft)	28
<code>\ntrianglelefteq</code> (\ntrianglelefteq)	28
<code>\ntrianglelefteq</code> (\ntrianglelefteq)	28
<code>\ntrianglelefteq</code> (\ntrianglelefteq)	28
<code>\ntrianglelefteq</code> (\ntrianglelefteq)	28
<code>\ntriangleright</code> (\ntriangleright)	28
<code>\ntriangleright</code> (\ntriangleright)	28
<code>\ntrianglerighteq</code> (\ntrianglerighteq)	28
<code>\ntrianglerighteq</code> (\ntrianglerighteq)	28
<code>\ntrianglerighteq</code> (\ntrianglerighteq)	28
<code>\ntrianglerighteq</code> (\ntrianglerighteq)	28
<code>\ntwoheadleftarrow</code> (\ntwoheadleftarrow)	24
<code>\ntwoheadrightarrow</code> (\ntwoheadrightarrow)	24
<code>\nu</code> (ν)	32
<code>null set</code>	42
<code>number</code>	<i>see</i> <code>\textnumero</code>
<code>number sets</code>	<i>see</i> alphabets, math
<code>numbers</code>	<i>see</i> digits
<code>\nuup</code> (ν)	32
<code>\nvargeq</code> (\nvargeq)	27
<code>\nvarleq</code> (\nvarleq)	27
<code>\nvarparallel</code> (\nparallel)	24
<code>\nvarparallelinv</code> (\nparallel)	24
<code>\nVDash</code> (\nVDash)	25
<code>\nVDash</code> (\nVDash)	23
<code>\nVdash</code> (\nVdash)	25
<code>\nVdash</code> (\nVdash)	24
<code>\nVDash</code> (\nVDash)	25
<code>\nVDash</code> (\nVDash)	23

<code>\nvdash</code> (\nvdash)	25
<code>\nvdash</code> (\nvdash)	23
<code>\nVdash</code> (\nVdash)	25
<code>\Nwarrow</code> (\Nwarrow)	29
<code>\nwarrow</code> (\nwarrow)	30
<code>\nwarrow</code> (\nwarrow)	28, 64
<code>\nwsearrow</code> (\nwsearrow)	64

O

<code>\O</code> (\mathbb{O})	8
<code>\o</code> (\mathbb{o})	8
<code>o</code> (o)	32
<code>\oasterisk</code> (\otimes)	19
<code>\obackslash</code> (\oslash)	19
<code>\obar</code> (\oslash)	18
<code>\oblong</code> (\square)	18
<code>\obot</code> (\oplus)	19
<code>\obslash</code> (\oslash)	18
<code>\ocirc</code> (\odot)	19
<code>\ocircle</code> (\odot)	18
<code>\ocoasterisk</code> (\otimes)	19
<code>\octagon</code> (\square)	52
<code>\Octosteel</code> (\bullet)	47
<code>\od</code> (\blacksquare)	13
<code>\odiv</code> (\oplus)	19
<code>\odot</code> (\odot)	19
<code>\odot</code> (\odot)	17
<code>\odplus</code> (\oplus)	19
<code>\OE</code> (\mathbb{E})	8
<code>\oe</code> (\mathbb{e})	8
<code>\officialeuro</code> (\mathbb{E})	14
<code>ogonek</code>	<i>see</i> accents
<code>\ogreaterthan</code> (\oslash)	18
<code>\ohill</code> (\blacksquare)	13
<code>ohm</code>	<i>see</i> <code>\textohm</code>
<code>\ohm</code> (Ω)	43
<code>\oiint</code> (\oiint)	22
<code>\oiintclockwise</code> (\oiint)	22
<code>\oiintctrclockwise</code> (\oiint)	22
<code>\oint</code> (\oint)	21
<code>\oint</code> (\oint)	20, 22
<code>\oint</code> (\oint)	22
<code>\ointclockwise</code> (\oint)	22
<code>\ointctrclockwise</code> (\oint)	22
<code>\oint</code> (\oint)	21
<code>\oint</code> (\oint)	20
<code>\ointclockwise</code> (\oint)	22
<code>\ointclockwise</code> (\oint)	22
<code>\ointctrclockwise</code> (\oint)	22
<code>\ointctrclockwise</code> (\oint)	22
<code>old-style digits</code>	15
<code>\oldstylenums</code>	15
<code>\oleft</code> (\oplus)	19
<code>\olessthan</code> (\oslash)	18
<code>\Omega</code> (Ω)	32
<code>\omega</code> (ω)	32
<code>\omegaup</code> (ω)	32

\ominus 19
 \ominus 17
 \onlymove (\square) 59
 \oo (∞) 10
 \open (\circ) 13
 \openJoin (\times) 24
 \openo (\circ) 10
 \openo (\circ) 11
 \openo (\circ) 8
 \opentimes (\times) 24
operators
 binary 17–19
 logical *see* logical operators
 set *see* set operators
 \oplus (\oplus) 19
 \oplus (\oplus) 17, 60
 \opposbishops (\blacksquare) 59
 \opposition (\circ°) 46
optical scaling 67
options *see* package options
or *see* \vee
 \oright (\oplus) 19
 \OrnamentDiamondSolid (\blacklozenge) 55
orthogonal to *see* \bot
 \oslash (\oslash) 19
 \oslash (\oslash) 17
 \otimes (\otimes) 19
 \otimes (\otimes) 17
 \otop (\oplus) 19
 \otriangleup (\triangleup) 19
ovals 53
 \ovee (\oslash) 18
 \overbrace ($\overbrace{\blacksquare}$) 40
 \overbrace ($\overbrace{\blacksquare}$) 38
 \overbracket 65, 66
 \overbracket (\blacksquare) 66
 \overgroup ($\overgroup{\blacksquare}$) 40
 \overleftarrow ($\overleftarrow{\blacksquare}$) 38
 \overleftrightharpoon ($\overleftrightharpoon{\blacksquare}$) 39
 \overline 38
 \overline ($\overline{\blacksquare}$) 38
 \overparenthesis 65, 66
 \overparenthesis ($\overparenthesis{\blacksquare}$) 66
 \Ovrrightarrow ($\Ovrrightarrow{\blacksquare}$) 38
 \overrightarrow (package) 38, 75
 \overrightarrow ($\overrightarrow{\blacksquare}$) 38
 \overring ($^{\circ}$) 13
 \ovoid (\circ) 19
 \owedge (\oslash) 18
 \owns *see* \ni
 \owns (\ni) 34
 \ownsbar (\ni) 34

P

\P (\P) 7, 74
 $\p@$ 65

package options

a (esvect) 40
 $bbgreekl$ (mathbbol) 44
 b (esvect) 40
 c (esvect) 40
 d (esvect) 40
 e (esvect) 40
 f (esvect) 40
 g (esvect) 40
 h (esvect) 40
 $mathcal$ (euscript) 44
 $mathscr$ (euscript) 44
 $sans$ (dsfont) 44
 $varg$ (txfonts/pxfonts) 33

packages

accents 65, 75, 76
amsbsy 71
amsmath 17, 23, 25, 28, 42, 44
amssymb 6, 17, 23, 25, 28, 42, 44, 75–77
amstext 63, 64
ar 45, 75
ascii 47, 72, 75
bbding 49–53, 55, 61, 75, 76
bbm 44, 75
bbold 44, 75
bm 71, 75, 76
braket 35
calrsfs 44
cancel 38
chemarrow 30, 39, 75
chemarr 39, 75, 76
dingbat .. 50, 54, 61, 75, 76
dsfont 44, 75
esint 22, 75
esvect 40, 75
eufrak 44
eurosymb 14, 75, 76
euscript 44, 75, 76
fclfont 75
fc 8, 11
fixmath 71
fontenc 6, 8, 11, 73
gensymb 43
graphics 62
graphicx 62
ifsym 45, 53, 58, 59, 61, 75, 76
isoent 73
latexsym .. 17, 23, 25, 28, 42, 60, 75, 76
manfnt 54, 56, 75, 76
marvosym .. 14, 43, 46–49, 54, 57, 61
matbbol 44
mathabx .. 19, 21, 23–28, 30, 31, 34, 35, 37, 40, 42, 43, 46, 54, 60, 61, 75, 77
mathbbol 44

mathcomp 43
mathdots 41, 65, 75, 76
mathrsfs 44, 75
mbboard 44, 75
nath 34, 36, 75
nicefrac 43, 75, 76
ntheorem 42
overrightarrow 38, 75
phonetic 11, 13, 62, 75
pifont .. 8, 49–52, 54, 55, 60, 75, 76
polynom 38
psnfss 51
pxfonts 17, 18, 22–29, 31–34, 42, 44, 60, 72
skak 59, 75, 76
skull 54, 75, 76
slashed 63
stmaryrd .. 18, 20, 23, 26, 28, 29, 31, 34, 35, 61, 73, 75, 76
textcomp 6, 7, 11, 14, 15, 28, 36, 43, 45, 56, 60, 72, 73, 75, 76
timing 45
tipa ... 9–11, 13, 62, 75, 76
trfsigns 25, 34, 37, 75
trsym 25, 75, 76
txfonts 17, 18, 22–29, 31–34, 42, 44, 60, 62, 72, 75, 76
ulsy 19, 30, 75
underscore 7
undertilde 40, 75, 76
units 43
universa 54, 57, 75, 76
upgreek 33, 75, 76
upquote 72
url 72
wasysym 8, 14, 15, 17, 18, 20, 23, 25–28, 42, 45–47, 51, 52, 56, 61, 75, 76
wsuipa 10, 13, 61, 62, 65, 75, 76
yfonts 44, 75, 76
yhmath 37, 38, 40, 41, 65, 75
zapfchan 75
Pakin, Scott 1, 73
 \PaperLandscape (\PaperLandscape) 59
 \PaperPortrait (\PaperPortrait) 59
 \par *see* \invamp
paragraph mark *see* \P
parallel .. *see also* \varparparallel
 \parallel (\parallel) 23
 \ParallelPort (\ParallelPort) 47
 ∂ (∂) 34
 ∂ (∂) 33
 ∂ (∂) 34
parts per thousand *see* \textperthousand

`\passedpawn` (\circ) 59
 pawn *see* chess symbols
`\Peace` (\P) 55
`\PencilLeft` (\PencilLeft) 50
`\PencilLeftDown` (\PencilLeftDown) 50
`\PencilLeftUp` (\PencilLeftUp) 50
`\PencilRight` (\PencilRight) 50
`\PencilRightDown` (\PencilRightDown) 50
`\PencilRightUp` (\PencilRightUp) 50
 pencils 50
`\pentagon` (\pentagon) 52
 percent sign *see* `\%`
`\permil` (\permil) 15
`\Perp` (\perp) 24
`\perp` (\perp) 23, 64
`\perthousand` (\perthousand) 43
`\Pfund` (\Pfund) 14
 pharmaceutical prescription *see*
 `\texttrecipe`
`\Phi` (Φ) 32
`\phi` (ϕ) 32
`\phiup` (ϕ) 32
`\Phone` (\Phone) 55
`\phone` (\phone) 56
`\PhoneHandset` (\PhoneHandset) 55
 phonetic (package) . 11, 13, 62, 75
 phonetic symbols 8–11
`\photon` (\photon) 45
 physical symbols 45
`\Pi` (Π) 32
`\pi` (π) 32
`\Pickup` (\Pickup) 47
`\pifont` (package) . 8, 49–52, 54, 55,
 60, 75, 76
 pilcrow *see* `\P`
 pipe *see* `\textpipe`
`\Pisces` (\Pisces) 46
`\pisces` (\pisces) 46
`\Pisymbol` 60
`\pitchfork` (\pitchfork) 42
`\pitchfork` (\pitchfork) 23
`\piup` (π) 32
`\planck` (\planck) 11
`\Plane` (\Plane) 55
 planets 45, 46
 playing cards *see* card suits
`\Plus` (\Plus) 50
 plus-or-minus sign *see* `\pm`
`\PlusCenterOpen` (\PlusCenterOpen) 50
`\pluscirc` (\pluscirc) 19
`\PlusOutline` (\PlusOutline) 50
 plusses 50, 51
`\PlusThinCenterOpen` ($\text{\PlusThinCenterOpen}$) 50
`\Pluto` (\Pluto) 46
`\Pluto` (\Pluto) 46
`\pluto` (\pluto) 45

`\pm` (\pm) 17
`\pmb` 71
`\pmod` 31
`\pod` 31
`\pointer` (\pointer) 56
`\Pointinghand` (\Pointinghand) 54
`\polishhook` (\polishhook) 13
 polygons 52
 polynom (package) 38
 polynomial division 38
 PostScript fonts 14, 33, 44, 49, 51,
 60, 70
`\pounds` (\pounds) 7, 74
 power set (\mathcal{P}) *see* alphabets,
 math
`\Pr` (\Pr) 31
`\prec` (\prec) 23
`\precapprox` (\precapprox) 24
`\precapprox` (\precapprox) 23
`\preccurlyeq` (\preccurlyeq) 24
`\preccurlyeq` (\preccurlyeq) 23
`\precdot` (\precdot) 24
`\preceq` (\preceq) 23
`\preceqq` (\preceqq) 24
`\precnapprox` (\precnapprox) 25
`\precnapprox` (\precnapprox) 23
`\precneq` (\precneq) 25
`\precneqq` (\precneqq) 24
`\precnsim` (\precnsim) 25
`\precnsim` (\precnsim) 23
`\precsim` (\precsim) 24
`\precsim` (\precsim) 23
 prescription *see* `\texttrecipe`
`\prime` (\prime) 42
`\Printer` (\Printer) 47
 probabilistic independence 64
`\prod` (\prod) 20
`\projlim` (projlim) 31
 pronunciation symbols *see*
 phonetic symbols
 proof, end of 42
`\propto` (\propto) 42
`\propto` (\propto) 23
`\ProvidesPackage` 75
`\Psi` (Ψ) 32
`\psi` (ψ) 32
`\psiup` (ψ) 32
 psnfss (package) 51
 pulse diagram symbols 45
`\PulseHigh` (\PulseHigh) 45
`\PulseLow` (\PulseLow) 45
 punctuation 8
`\pwedge` (\pwedge) 11
 pxfonts (package) . 17, 18, 22–29,
 31–34, 42, 44, 60, 72

Q

Q.E.D. 42

`\qside` (\qside) 59
`\quaternnote` (\quaternnote) 56
 quaternions (\mathbb{H}) . *see* alphabets,
 math
 queen *see* chess symbols
`\quotedblbase` (\quotedblbase) 8
`\quotesinglbase` (\quotesinglbase) 8

R

`\r` (\r) 11
`\Radiation` (\Radiation) 59
 radicals ... *see* `\sqrt` and `\surd`
`\Radioactivity` (\Radioactivity) 48
`\Rain` (\Rain) 58
`\RainCloud` (\RainCloud) 58
 raising *see* `\textraising`
`\RaisingEdge` (\RaisingEdge) 45
`\Rangle` (\Rangle) 44
`\rAngle` (\rAngle) 36
`\rangle` (\rangle) 35
`\rarrowfill` 39
 rational numbers (\mathbb{Q}) *see*
 alphabets, math
 rationalized Planck constant . *see*
 `\hbar`
`\Rbag` (\Rbag) 34
`\rbag` (\rbag) 34
`\rbbrack` (\rbbrack) 35
`\Rbrack` (\Rbrack) 44
`\rBrack` (\rBrack) 36
`\rc` (\rc) 13
`\rCeil` (\rCeil) 36
`\rceil` (\rceil) 35
`\rcorners` (\rcorners) 34
`\Re` (\Re) 33
 real numbers (\mathbb{R}) . *see* alphabets,
 math
 recipe *see* `\texttrecipe`
`\recorder` (\recorder) 56
`\Rectangle` (\Rectangle) 53
`\RectangleBold` (\RectangleBold) 53
 rectangles 53, 54
`\RectangleThin` (\RectangleThin) 53
`\Rectpipe` (\Rectpipe) 47
`\Rectsteel` (\Rectsteel) 47
 reduced quadrupole moment *see*
 `\rqm`
`\reflectbox` 62
 registered trademark *see*
 `\textregistered`
 relational symbols 23
 binary 23–27
 negated binary 23–25
 triangle 28
`\Relbar` (\Relbar) 30, 62
`\relbar` (\relbar) 30, 62
`\restoresymbol` 60

`\restriction` *see*
`\upharpoonright`
`\restriction` (\upharpoonright) 30
retracting . *see* `\textretracting`
return *see* carriage return
`\revD` (\mathbb{D}) 11
`\revdots` (\cdots) 65
`\reve` (\wp) 10
`\reveject` (\wp) 10
`\revepsilon` (ϵ) 10, 62
reverse solidus *see*
`\textbackslash`
reversed symbols 62
`\reversedvideobend` (\curvearrowright) .. 54
`\revglotstop` (\mathfrak{f}) 10
`\Rewind` (\blacktriangleleft) 57
`\RewindToIndex` ($\blacktriangleleft\blacktriangleleft$) 57
`\RewindToStart` (\blacktriangleleft) 57
`\rfilet` (\downarrow) 35
`\rFloor` (\lfloor) 36
`\rfloor` (\rfloor) 35
`\rgroup` (\rangle) 35
`\RHD` (\blacktriangleright) 18
`\rhd` (\triangleright) 17, 18
`\rho` (ρ) 32
`\rhoup` (ρ) 32
`\right` 35, 36
`\RIGHTarrow` (\blacktriangleright) 56
`\Rightarrow` 57
`\Rightarrow` (\Rightarrow vs. \rightarrow vs. \Rightarrow) 61
`\Rightarrow` (\Rightarrow) 17, 28
`\Rightarrow` (\rightarrow) 57
`\rightarrow` (\rightarrow) 30
`\rightarrow` (\rightarrow) 28
`\rightarrowtail` (\rightarrowtail) 29
`\rightarrowtriangle` (\rightarrowtriangle) .. 29
`\rightbarharpoon` (\Rightarrow) 30
`\RIGHTCIRCLE` (\blackcirc) 56
`\RIGHTcircle` (\circ) 56
`\Rightcircle` (\circ) 56
`\RightDiamond` (\blacklozenge) 53
`\rightbarpoondown` (\rightarrow) 30
`\rightbarpoondown` (\rightarrow) 28
`\rightbarpoonup` (\rightarrow) 30
`\rightbarpoonup` (\rightarrow) 28
`\rightleftarrows` (\Leftrightarrow) 30
`\rightleftarrows` (\Leftrightarrow) 29
`\rightleftharpoonup` (\leftrightharpoonup) 30
`\rightleftharpoons` (\rightleftharpoons) 30
`\rightleftharpoons` (\rightleftharpoons) 29
`\rightleftharpoons` (\rightleftharpoons) 28
`\rightleftharpoonsfill` 39
`\rightmoon` (\mathbb{D}) 46
`\rightmoon` (\mathbb{D}) 45
`\rightp` (\circ) 13
`\rightpointleft` (\rightarrowtail) 50
`\rightpointright` (\rightarrowtail) 50

`\rightrightarrows` (\rightrightarrows) 30
`\rightrightarrows` (\rightrightarrows) 29
`\righttharpoons` (\righttharpoons) ... 30
`\Rightscissors` (\times) 49
`\rightslice` (\triangleright) 18
`\rightsquigarrow` (\rightsquigarrow) 30
`\rightsquigarrow` (\rightsquigarrow) 29
`\rightt` (\vdash) 13
`\rightthreetimes` (\times) 42
`\rightthreetimes` (\times) 17
`\rightthumbsdown` (\Downarrow) 50
`\rightthumbsup` (\Uparrow) 50
`\righttoleftarrow` (\rightarrowtail) 30
`\Righttorque` (\curvearrowright) 47
`\rightturn` (\curvearrowright) 56
`\ring` (\blacksquare) 37
ring equal to *see* `\circeq`
ring in equal to *see* `\eqcirc`
`\riota` (ι) 11
`\rip` (\mathfrak{z}) 54
`\risingdotseq` ($\dot{=}$) 24
`\risingdotseq` ($\dot{=}$) 23
`\rJoin` (\bowtie) 24
`\rlap` 53, 64
`\rmoustache` (\int) 35
rook *see* chess symbols
roots *see* `\sqrt`
`\rotatebox` 62
rotated symbols 62
`\rota` (ω) 11
`\rota` (ω) 11
`\rotr` (\mathfrak{z}) 11
`\rotr` (\mathfrak{z}) 11
`\rotw` (\mathfrak{z}) 11
`\roty` (\mathfrak{z}) 11
`\RoundedLsteel` (\mathbb{T}) 47
`\RoundedTsteel` (\mathbb{L}) 47
`\RoundedTTsteel` (\mathbb{I}) 47
`\Rparen` (\mathbb{J}) 44
`\rqm` (\mathfrak{f}) 63
`\rrbracket` (\mathbb{J}) 35
`\rrceil` (\mathbb{J}) 34
`\rrfloor` (\mathbb{J}) 34
`\Rrightarrow` (\Rightarrow) 29
`\rrparenthesis` (\mathbb{J}) 34
`\RS` (\blacktriangle) 47
`\Rsh` (\mathfrak{r}) 30
`\Rsh` (\mathfrak{r}) 29
`\rtimes` (\rtimes) 19
`\rtimes` (\rtimes) 17
`\rtriple` 36
`\rVert` (\mathbb{J}) 36

S

`\S` (\S) 7, 74
safety-related symbols 48
`\Sagittarius` (\mathfrak{z}) 46
`\sagittarius` (\mathfrak{z}) 46

`\samebishops` (\blacksquare) 59
sans (dsfont package option) .. 44
`\satellitedish` (\mathfrak{z}) 54
`\Saturn` (\mathfrak{z}) 46
`\Saturn` (\mathfrak{z}) 46
`\satur` (\mathfrak{h}) 45
`\savesymbol` 60
`\Sborder` (\mathbb{S}) 54
scaling
 mechanical 67, 69
 optical 67
`\scd` (\mathbb{D}) 10
`\scg` (\mathbb{G}) 10
`\schwa` (\mathfrak{a}) 10
`\schwa` (\mathfrak{a}) 11
`\sci` (\mathbb{I}) 10
scientific symbols 45–48
`\ScissorHollowLeft` (\mathfrak{z}) ... 49
`\ScissorHollowRight` (\mathfrak{z}) .. 49
`\ScissorLeft` (\mathfrak{z}) 49
`\ScissorLeftBrokenBottom` (\mathfrak{z})
 49
`\ScissorLeftBrokenTop` (\mathfrak{z}) . 49
`\ScissorRight` (\mathfrak{z}) 49
`\ScissorRightBrokenBottom` (\mathfrak{z})
 49
`\ScissorRightBrokenTop` (\mathfrak{z}) 49
scissors 49
`\scn` (\mathbb{N}) 10
`\Scorpio` (\mathfrak{z}) 46
`\scorpio` (\mathfrak{z}) 46
`\scr` (\mathbb{R}) 10
script letters *see* alphabets, math
`\scripta` (\mathfrak{a}) 10
`\scriptg` (\mathfrak{g}) 10
`\scriptscriptstyle` 63, 64
`\scriptstyle` 63, 64
`\scriptv` (\mathfrak{v}) 10
`\scu` (\mathfrak{u}) 10
`\scy` (\mathfrak{y}) 10
seagull *see* `\textseagull`
`\Searrow` (\mathfrak{z}) 29
`\searrow` (\searrow) 30
`\searrow` (\searrow) 28, 64
`\sec` (sec) 31
`\second` (\mathfrak{z}) 42
seconds, angular ... *see* `\second`
`\secstress` (\mathfrak{z}) 13
section mark *see* `\S`
`\SectioningDiamond` (\mathfrak{z}) ... 59
`\see` (\mathfrak{z}) 59
segmented digits 45
`\selectfont` 6
semantic valuation *see*
 `\llbracket`/`\rrbracket` and
 `\llbbrack`/`\rbbbrack`

semidirect products . . .	17, 19, 42	<code>\SmallCircle</code> (\bigcirc)	53	<code>\sqcupplus</code> (\sqcupplus)	18
<code>\seppawns</code> ($\circ\circ$)	59	<code>\SmallCross</code> (\times)	53	<code>\sqdoublecap</code> (\sqdoublecap)	19
<code>\SerialInterface</code> (⌘)	47	<code>\SmallDiamondshape</code> (\diamond)	53	<code>\sqdoublecup</code> (\sqdoublecup)	19
<code>\SerialPort</code> (\equiv)	47	<code>\smallfrown</code> (\frown)	23	<code>\sqiiint</code> (\iiint)	22
set operators		<code>\SmallHBar</code> ($\bar{}$)	53	<code>\sqiint</code> (\iint)	22
intersection	see <code>\cap</code>	<code>\SmallLowerDiamond</code> (\blacklozenge)	53	<code>\sqint</code> (\int)	22
union	see <code>\cup</code>	<code>\smallpencil</code> (\pencil)	50	<code>\sqint</code> (\int)	22
<code>\setminus</code> (\backslash)	17	<code>\SmallRightDiamond</code> (\blacklozenge)	53	<code>\sqint</code> (\int)	22
SGML	73	<code>\smallsetminus</code> (\setminus)	17	<code>\sqrt</code> ($\sqrt{}$)	38, 64
sha	see Tate-Shafarevich group	<code>\smallsmile</code> (\smile)	23	<code>\sqSubset</code> (\sqsubseteq)	26
<code>\sharp</code> (\sharp)	42, 56	<code>\SmallSquare</code> (\square)	53	<code>\sqsubset</code> (\subset)	26
<code>\Shilling</code> (β)	14	<code>\SmallTriangleDown</code> (∇)	53	<code>\sqsubseteq</code> (\sqsubseteq)	26
<code>\shortdownarrow</code> (\downdownarrows)	29	<code>\smalltriangledown</code> (\triangledown)	19	<code>\sqsubseteq</code> (\sqsubseteq)	25
<code>\ShortFifty</code> (VF)	57	<code>\SmallTriangleLeft</code> (\triangleleft)	53	<code>\sqsubseteqq</code> (\sqsubseteq)	26
<code>\ShortForty</code> (VF)	57	<code>\smalltriangleleft</code> (\triangleleft)	19	<code>\sqsubsetneq</code> (\sqsubsetneq)	26
<code>\shortleftarrow</code> (\leftarrow)	29	<code>\SmallTriangleRight</code> (\triangleright)	53	<code>\sqsubsetneqq</code> (\sqsubsetneqq)	26
<code>\shortmid</code> (I)	23	<code>\smalltriangleright</code> (\triangleright)	19	<code>\sqSupset</code> (\supseteq)	26
<code>\ShortNinetyFive</code> (VF)	57	<code>\SmallTriangleUp</code> (\triangleup)	53	<code>\sqsupset</code> (\supset)	26
<code>\shortparallel</code> (\parallel)	23	<code>\smalltriangleup</code> (\triangleup)	19	<code>\sqsupseteq</code> (\supseteq)	25, 26
<code>\ShortPulseHigh</code> (L)	45	<code>\SmallVBar</code> (V)	53	<code>\sqsupseteqq</code> (\supseteq)	25
<code>\ShortPulseLow</code> (T)	45	<code>\smile</code> (\smile)	23	<code>\sqsupseteqq</code> (\supseteq)	26
<code>\shortrightarrow</code> (\rightarrow)	29	<code>\Smiley</code> (☺)	57	<code>\sqsupsetneq</code> (\sqsupsetneq)	26
<code>\ShortSixty</code> (VF)	57	<code>\smiley</code> (☺)	56	<code>\sqsupsetneqq</code> (\sqsupsetneqq)	26
<code>\ShortThirty</code> (VF)	57	smiley faces	47, 56, 57	<code>\Square</code> (\square)	53
<code>\shortuparrow</code> (\uparrow)	29	<code>\Snow</code> (❄)	58	<code>\Square</code> (\square vs. \square vs. \square)	61
<code>\showclock</code>	58	<code>\SnowCloud</code> (☁)	58	<code>\Square</code> (\square)	51
<code>\SI</code> (⚙)	47	<code>\Snowflake</code> (❄)	52	<code>\Square</code> (\square)	53
<code>\Sigma</code> (Σ)	32	<code>\SnowflakeChevron</code> (❄)	52	<code>\square</code> (\square)	19
<code>\sigma</code> (σ)	32	<code>\SnowflakeChevronBold</code> (❄)	52	<code>\square</code> (\square)	42
<code>\sigmaup</code> (σ)	32	snowflakes	52	square root	see <code>\sqrt</code>
<code>\sim</code> (\sim)	23, 72	<code>\SO</code> (♂)	47	hooked	see <code>\hksqrt</code>
<code>\simeq</code> (\simeq)	23	<code>\SOH</code> (Ⓢ)	47	<code>\SquareCastShadowBottomRight</code>	
<code>\sin</code> (\sin)	31	space		(\square)	53
<code>\sinh</code> (\sinh)	31	thin	71	<code>\SquareCastShadowTopLeft</code> (\square)	
<code>\SixFlowerAlternate</code> (✱)	52	space, visible	7	53
<code>\SixFlowerAltPetal</code> (✱)	52	spades (suit)	42, 55	<code>\SquareCastShadowTopRight</code> (\square)	
<code>\SixFlowerOpenCenter</code> (✱)	52	<code>\spadesuit</code> (\spadesuit)	42	53
<code>\SixFlowerPetalDotted</code> (✱)	52	<code>\Sparkle</code> (✱)	52	<code>\Squaredot</code> (\cdot)	43
<code>\SixFlowerPetalRemoved</code> (✱)	52	<code>\SparkleBold</code> (✱)	52	<code>\Squarepipe</code> (\square)	47
<code>\SixFlowerRemovedOpenPetal</code>		sparkles	52	squares	53, 54
(✱)	52	“special” characters	7	<code>\SquareShadowA</code> (\square)	53
<code>\SixStar</code> (✱)	52	<code>\SpecialForty</code> (VF)	57	<code>\SquareShadowB</code> (\square)	53
<code>\SixteenStarLight</code> (✱)	52	<code>\sphericalangle</code> (\sphericalangle)	42	<code>\SquareShadowBottomRight</code> (\square)	
skak (package)	59, 75, 76	<code>\sphericalangle</code> (\triangleleft)	42	53
skull (package)	54, 75, 76	<code>\SpinDown</code> (\downarrow)	53	<code>\SquareShadowC</code> (\square)	53
<code>\skull</code> (☠)	54	<code>\SpinUp</code> (\uparrow)	53	<code>\SquareShadowTopLeft</code> (\square)	53
<code>\slash</code> ($/$)	72	<code>\splitvert</code>	47	<code>\SquareShadowTopRight</code> (\square)	53
<code>\slashb</code> (b)	10	<code>\splitvert</code> (!)	47	<code>\SquareSolid</code> (\blacksquare)	53
<code>\slashc</code> (c)	10	<code>\sqbullet</code> (\blacksquare)	19	<code>\Squaresteel</code> (\blacksquare)	47
<code>\slashd</code> (d)	10	<code>\sqcap</code> (\sqcap)	19	<code>\squarewithdots</code> (⦶)	54
slashed (package)	63	<code>\sqcap</code> (\sqcap)	17	<code>\sqplus</code> (\sqplus)	19
slashed	63	<code>\sqcup</code> (\sqcup)	18	<code>\SS</code> (SS)	8
slashed letters	63	<code>\sqcupplus</code> (\sqcupplus)	18	<code>\ss</code> (ß)	8
<code>slashed.sty</code> (file)	63	<code>\sqcup</code> (\sqcup)	19		
<code>\slashu</code> (u)	10	<code>\sqcup</code> (\sqcup)	17		
<code>\Sleet</code> (☃)	58				

\backslash ssearrow (\backslash) 29
 \backslash slash ($//$) 18
 \backslash sswarrow (\swarrow) 29
 \backslash stackrel 17, 66
 \backslash star (\star) 17, 65
 Star of David 51, 52
 stars 42, 51, 52
 statistical independence 64
 sterling *see* \backslash pounds
 stmaryrd (package) 18, 20, 23, 26,
 28, 29, 31, 34, 35, 61, 73, 75,
 76
 stochastic independence *see* \backslash bot
 \backslash StoneMan (\blacktriangle) 58
 \backslash Stopsign (\blacksquare) 48
 \backslash StopWatchEnd (⌚) 58
 \backslash StopWatchStart (⌚) 58
 \backslash stress (') 13
 \backslash strictfi (ε) 24
 \backslash strictif (\neg) 24
 \backslash strictiff ($\varepsilon\neg$) 24
 \backslash StrokeFive (||||) 59
 \backslash StrokeFour (||||) 59
 \backslash StrokeOne ($|$) 59
 \backslash StrokeThree (|||) 59
 \backslash StrokeTwo (||) 59
 \backslash STX (⊙) 47
 \backslash SUB (\rightarrow) 47
 subscripts
 new symbols used in 63
 \backslash Subset (\subseteq) 26
 \backslash Subset (\subseteq) 26
 \backslash subset (\subset) 26
 \backslash subset (\subset) 25
 \backslash subseteq (\subseteq) 26
 \backslash subseteq (\subseteq) 25
 \backslash subseteqq (\subseteq) 26
 \backslash subseteqq (\subseteq) 26
 \backslash subsetneq (\subsetneq) 26
 \backslash subsetneq (\subsetneq) 26
 \backslash subsetneqq (\subsetneqq) 26
 \backslash subsetneqq (\subsetneqq) 26
 \backslash subsetplus (\subseteq) 26
 \backslash subsetpluseq (\subseteq) 26
 subsets 25, 26
 \backslash succ (\succ) 23
 \backslash succapprox (\gtrsim) 24
 \backslash succapprox (\gtrsim) 23
 \backslash succcurlyeq (\gtrsim) 24
 \backslash succcurlyeq (\gtrsim) 23
 \backslash succdot (\succ) 24
 \backslash succeq (\succeq) 23
 \backslash succeqq (\succeq) 24
 \backslash succnapprox (\gtrsim) 25
 \backslash succnapprox (\gtrsim) 23
 \backslash succneq (\gtrsim) 25
 \backslash succneqq (\gtrsim) 24

\backslash succnsim (\gtrsim) 25
 \backslash succnsim (\gtrsim) 23
 \backslash succsim (\gtrsim) 24
 \backslash succsim (\gtrsim) 23
 such that (3) 62
 \backslash sum (Σ) 20
 \backslash Summit (\blacktriangle) 58
 \backslash SummitSign (\blackdagger) 58
 \backslash Sun (\odot) 46
 \backslash Sun (\odot vs. ☼ vs. \odot) 61
 \backslash Sun (\odot) 46
 \backslash Sun (☼) 58
 \backslash sun (☼) 56
 \backslash SunCloud (☼) 58
 \backslash SunshineOpenCircled (☼) 55
 \backslash sup (sup) 31
 superscripts
 new symbols used in 63
 supersets 25, 26
 \backslash Supset (\supset) 26
 \backslash Supset (\supset) 26
 \backslash supset (\supset) 26
 \backslash supset (\supset) 25
 \backslash supseteq (\supseteq) 26
 \backslash supseteq (\supseteq) 25
 \backslash supseteqq (\supseteq) 26
 \backslash supseteqq (\supseteq) 26
 \backslash supsetneq (\supsetneq) 26
 \backslash supsetneq (\supsetneq) 26
 \backslash supsetneqq (\supsetneqq) 26
 \backslash supsetneqq (\supsetneqq) 26
 \backslash supsetplus (\supset) 26
 \backslash supsetpluseq (\supset) 26
 \backslash surd ($\sqrt{}$) 42
 \backslash SurveySign (\blacktriangle) 58
 \backslash Swarrow (\swarrow) 29
 \backslash swarrow (\swarrow) 30
 \backslash swarrow (\swarrow) 28, 64, 65
 swung dash *see* \backslash sim
 \backslash syl (\blacksquare) 13
 \backslash syllabic (,) 13
 Symbol (PostScript font) . 33, 60
 symbols
 alpine 58
 APL 46
 astrological 46
 astronomical 45, 46
 biological 48
 body-text 7–16
 bold 71
 chess 59
 clock 58
 communication 47
 computer hardware 47
 contradiction 17, 30
 currency 14, 44
 dangerous bend 54

 definition 17, 66
 dictionary ... *see* symbols,
 phonetic
 dingbat 49–55
 dot 41
 electrical 45
 engineering 45, 47
 genealogical 56
 general 56
 information 54
 informer 59
 Knuth's 54, 56
 laundry 57
 letter-like 33, 34
 linguistic 8–11
 log-like 31, 71
 mathematical 17–44
 METAFONTbook 56
 miscellaneous ... 42, 54–59
 monetary 14, 44
 navigation 57
 phonetic 8–11
 physical 45
 pulse diagram 45
 relational 23
 reversed 62
 rotated 62
 safety-related 48
 scientific 45–48
 subset and superset . 25, 26
 technological 45–48
 T_EXbook 54, 56
 upside-down 62
 variable-sized 20–22
 weather 58
 zodiacal 46
 symbols.tex (file) 60, 75
 \backslash SYN (☞) 47

T

\backslash T 8
 \backslash t (\blacksquare) 11
 tacks 23, 33
 \backslash taild (d) 10
 \backslash tailinvr (r) 10
 \backslash taill (l) 10
 \backslash tailn (n) 10
 \backslash tailr (r) 10
 \backslash tails (s) 10
 \backslash tailt (t) 10
 \backslash tailz (z) 10
 \backslash talloblong (||) 18
 tally markers 59
 \backslash tan (tan) 31
 \backslash tanh (tanh) 31
 \backslash Tape (⏮) 55
 \backslash Taschenuhr (⌚) 58
 Tate-Shafarevich group (III) . 60

<code>\tau</code> (τ)	32	<code>\textbraceleft</code> ($\{$)	7	<code>\textdotacute</code> ($\text{◌}\acute{\cdot}$)	12
<code>\Taurus</code> (♉)	46	<code>\textbraceright</code> ($\}$)	7	<code>\textdotbreve</code> ($\text{◌}\breve{\cdot}$)	12
<code>\Taurus</code> (♉)	46	<code>\textbreve</code> ($\text{◌}\breve$)	11	<code>\textdoublebaresh</code> (⸏)	9
<code>\taurus</code> (♉)	46	<code>\textbrokenbar</code> (⸔)	15, 74	<code>\textdoublebarpipe</code> (⸮)	9
<code>\tauup</code> (τ)	32	<code>\textbullet</code> (\bullet)	7, 15	<code>\textdoublebarslash</code> (⸮)	9
<code>\tccentigrade</code> ($^{\circ}\text{C}$)	43	<code>\textbullseye</code> (⦿)	9	<code>\textdoublegrave</code> ($\text{◌}\text{¨}$)	12
<code>\tcmu</code> (μ)	43	<code>\textcelsius</code> ($^{\circ}\text{C}$)	45	<code>\textdoublepipe</code> (⋮)	9
<code>\tcohm</code> (Ω)	43	<code>\textceltpal</code> (◌)	9	<code>\textdoublevbaraccent</code> (⸮)	12
<code>\tcpertenthousand</code> (‰)	43	<code>\textcent</code> (¢)	14, 74	<code>\textdoublevertline</code> (⋮)	9
<code>\tcporthousand</code> (‰)	43	<code>\textcentoldstyle</code> (¢)	14	<code>\textdownarrow</code> (\downarrow)	28
<code>\td</code> (■)	13	<code>\textchi</code> (χ)	9	<code>\textdownstep</code> (◌)	9
technological symbols	45–48	<code>\textcircled</code> (◯)	11	<code>\textdyoghlig</code> (⸏)	9
<code>\Telefon</code> (☎)	47	<code>\textcircledP</code> (Ⓟ)	15	<code>\textdzlig</code> (⸏)	9
<code>\Telephone</code> (☎)	59	<code>\textcircumacute</code> ($\text{◌}\acute{\circ}$)	11	<code>\texteightoldstyle</code> (8)	15
<code>\Tent</code> (X)	58	<code>\textcircumdot</code> ($\text{◌}\dot{\circ}$)	12	<code>\textellipsis</code> (⋯)	7
<code>\tesh</code> (ŧ)	10	<code>\textcloseepsilon</code> (◌)	9	<code>\textemdash</code> (—)	7
<code>testfont.dvi</code> (file)	69	<code>\textcloseomega</code> (◌)	9	<code>\textendash</code> (—)	7
<code>testfont.tex</code> (file)	68, 69	<code>\textcloserevepsilon</code> (◌)	9	<code>\textepsilon</code> (ϵ)	9
<code>TeX</code>	60, 62–70, 72, 75	<code>\textcolonmonetary</code> (₯)	14	<code>\textesh</code> (ŧ)	10
<code>TeXbook</code> , The	62–66, 70	<code>\textcommatailz</code> (₧)	9	<code>\textestimated</code> (€)	15
symbols from	54, 56	<code>\textcomp</code> (package)	6, 7, 11, 14, 15, 28, 36, 43, 45, 56, 60, 72, 73, 75, 76	<code>\texteuro</code> (€)	14
<code>\text</code>	17, 63, 64	<code>\textcopyleft</code> (◌)	15	<code>\texttexclamdown</code> (¡)	7
<code>\textacutedbl</code> (¨)	14	<code>\textcopyright</code> (©)	7, 15, 74	<code>\textfishhookr</code> (r)	10
<code>\textacutemacron</code> ($\text{◌}\acute{\text{◌}}$)	11	<code>\textcorner</code> (◌)	9	<code>\textfiveoldstyle</code> (5)	15
<code>\textacutewedge</code> (◌)	11	<code>\textcrb</code> (b)	9	<code>\textflorin</code> (₣)	14
<code>\textadvancing</code> (◌)	11	<code>\textcrd</code> (d)	9	<code>\textfouroldstyle</code> (4)	15
<code>\textasciicircum</code> (ˆ)	14, 74	<code>\textcrg</code> (g)	9	<code>\textfractionsolidus</code> (⁄)	43
<code>\textasciibreve</code> (˘)	14	<code>\textcrh</code> (h)	9	<code>\textfrak</code>	44
<code>\textasciicaron</code> (ˇ)	14	<code>\textcrinvglotstop</code> (₿)	9	<code>\textg</code> (g)	10
<code>\textasciicircum</code> (ˆ)	7, 72	<code>\textcrlambda</code> (λ)	9	<code>\textgamma</code> (γ)	10
<code>\textasciidieresis</code> (¨)	14, 74	<code>\textcrtwo</code> (₂)	9	<code>\textglobfall</code> (⌵)	10
<code>\textasciigrave</code> (˘)	14	<code>\textctc</code> (¢)	9	<code>\textglobrise</code> (⁄)	10
<code>\textasciimacron</code>	73	<code>\textctd</code> (d)	9	<code>\textglotstop</code> (₿)	9
<code>\textasciitilde</code> (˜)	7, 72	<code>\textctdtzlig</code> (⸏)	9	<code>\textgoth</code>	44
<code>\textasteriskcentered</code> (*)	7, 15	<code>\textctesh</code> (ŧ)	9	<code>\textgravecircum</code> ($\text{◌}\grave{\circ}$)	12
<code>\textbabygamma</code> (γ)	9	<code>\textctj</code> (j)	9	<code>\textgravedbl</code> ($\text{◌}\text{¨}$)	14
<code>\textbackslash</code> (\backslash)	7, 72	<code>\textctn</code> (n)	9	<code>\textgravedot</code> ($\text{◌}\dot{\text{◌}}$)	12
<code>\textbaht</code> (฿)	14	<code>\textctt</code> (t)	9	<code>\textgravemacron</code> ($\text{◌}\grave{\text{◌}}$)	12
<code>\textbar</code> (⏚)	7, 72	<code>\textcttctclig</code> (⸏)	9	<code>\textgravemid</code> (◌)	12
<code>\textbarb</code> (b)	9	<code>\textctyogh</code> (ğ)	9	<code>\textgreater</code> (>)	7, 72
<code>\textbarc</code> (c)	9	<code>\textctz</code> (z)	9	<code>\textguarani</code> (₲)	14
<code>\textbard</code> (d)	9	<code>\textcurrency</code> (₹)	14, 74	<code>\texthalflength</code> (◌)	9
<code>\textbardbl</code> (⏚)	15	<code>\textdagger</code> (†)	7, 15	<code>\texthardsign</code> (Ⓢ)	9
<code>\textbardotlessj</code> (j)	9	<code>\textdaggerdbl</code> (‡)	7, 15	<code>\texthooktop</code> (◌)	9
<code>\textbarg</code> (g)	9	<code>\textdbend</code> (⤵)	54	<code>\texthtb</code> (b)	9
<code>\textbarglotstop</code> (₿)	9	<code>\textdblhyphen</code> (=)	15	<code>\texthtbardotlessj</code> (j)	9
<code>\textbari</code> (i)	9	<code>\textdblhyphenchar</code> (=)	15	<code>\texthtc</code> (c)	9
<code>\textbarl</code> (l)	9	<code>\textdctzlig</code> (⸏)	9	<code>\texthtd</code> (d)	9
<code>\textbaro</code> (o)	9	<code>\textdegree</code> ($^{\circ}$)	43, 74	<code>\texthtg</code> (g)	9
<code>\textbarrevglotstop</code> (₿)	9	<code>\textdied</code> (†)	56	<code>\texthth</code> (h)	9
<code>\textbaru</code> (u)	9	<code>\textdiscount</code> (ℳ)	15	<code>\texththeng</code> (h)	9
<code>\textbeltl</code> (l)	9	<code>\textdiv</code> (÷)	43	<code>\texthtk</code> (k)	9
<code>\textbeta</code> (β)	9	<code>\textdivorced</code> (⚭)	56	<code>\texthtp</code> (p)	9
<code>\textbigcircle</code> (◯)	15	<code>\textdollar</code> ($\text{\$}$)	7, 14	<code>\texthtq</code> (q)	9
<code>\textblank</code> (b)	15	<code>\textdollaroldstyle</code> ($\text{\$}$)	14	<code>\texthtrtaild</code> (d)	9
<code>\textborn</code> (*)	56	<code>\textdong</code> (₫)	14	<code>\texhtscg</code> (g)	9
<code>\textbottomtiebar</code> (⏟)	11			<code>\texthtt</code> (t)	9
				<code>\texthvlig</code> (h)	9
				<code>\textifsym</code>	45

<code>\textinterrobang</code> (?)	15	<code>\textphi</code> (ϕ)	9	<code>\textscn</code> (N)	9
<code>\textinterrobangdown</code> (\textdownarrow)	15	<code>\textpilcrow</code> (\P)	15	<code>\textscelig</code> (Æ)	9
<code>\textinvglotstop</code> (ḡ)	9	<code>\textpipe</code> ($ $)	9	<code>\textscomega</code> (Ω)	9
<code>\textinvscr</code> (Ṛ)	9	<code>\textpm</code> (\pm)	43, 74	<code>\textscr</code> (R)	9
<code>\textinvsubbridge</code> (Ṛ)	12	<code>\textpolhook</code> (Ṗ)	12	<code>\textscripta</code> (a)	9
<code>\textiota</code> (ἰ)	9	<code>\textprimstress</code> (ˈ)	9	<code>\textscriptg</code> (g)	9
<code>\textlambda</code> (λ)	9	<code>\textquestiondown</code> (ἱ)	7	<code>\textscriptv</code> (v)	9
<code>\textlangle</code> (\langle)	36, 72	<code>\textquotedbl</code> (")	8, 71	<code>\textscu</code> (u)	9
<code>\textlbrackdbl</code> (\llbracket)	36	<code>\textquotedblleft</code> (“)	7	<code>\textscy</code> (y)	9
<code>\textleaf</code> (☞)	56	<code>\textquotedblright</code> (”)	7	<code>\textseagull</code> (Ṡ)	12
<code>\textleftarrow</code> (\leftarrow)	28	<code>\textquoteleft</code> (')	7	<code>\textsecstress</code> (.)	9
<code>\textlengthmark</code> (:)	9	<code>\textquoteright</code> (')	7	<code>\textsection</code> (\S)	7, 15
<code>\textless</code> ($<$)	7, 71, 72	<code>\textquotesingle</code> (')	15	<code>\textservicemark</code> (SM)	15
<code>\textlhdbend</code> (Ḣ)	54	<code>\textquotestraightbase</code> (,)	15	<code>\textsevenoldstyle</code> (7)	15
<code>\textlhookt</code> (ḥ)	9	<code>\textquotestraightdblbase</code> (,,)	15	<code>\textsixoldstyle</code> (6)	15
<code>\textlhtlongi</code> (ḭ)	9	<code>\textraiseglotstop</code> (ˆ)	9	<code>\textsoftsign</code> (ṡ)	9
<code>\textlhtlongy</code> (ḙ)	9	<code>\textraisevibyi</code> (ḽ)	9	<code>\textsterling</code> (£)	7, 14
<code>\textlira</code> (₤)	14	<code>\textraising</code> (Ṛ)	12	<code>\textstretchc</code> (C)	9
<code>\textlnot</code> (\neg)	43, 74	<code>\textramshorns</code> (r)	9	<code>\textstyle</code>	63, 64, 71
<code>\textlonglegr</code> (ḡ)	9	<code>\texttriangle</code> (\triangle)	36, 72	<code>\textsubacute</code> (Ḃ)	12
<code>\textlowering</code> (Ḃ)	12	<code>\texttrbrackdbl</code> (\llbracket)	36	<code>\textsubarch</code> (Ḃ)	12
<code>\textlptr</code> (ˆ)	9	<code>\textrecipe</code> (R)	15, 62	<code>\textsubbar</code> (Ḃ)	12
<code>\textlquill</code> (Ḣ)	36	<code>\textreference</code> (R)	15, 17	<code>\textsubbridge</code> (Ḃ)	12
<code>\textltailm</code> (Ḣ)	9	<code>\textregistered</code> (®)	7, 15, 74	<code>\textsubcircum</code> (Ḃ)	12
<code>\textltailn</code> (Ḣ)	9	<code>\textretracting</code> (Ḃ)	12	<code>\textsubdot</code> (Ḃ)	12
<code>\textlttilde</code> (Ḣ)	9	<code>\textrevapostrophe</code> (')	9	<code>\textsubgrave</code> (Ḃ)	12
<code>\textlyoghlig</code> (Ḣ)	9	<code>\textreve</code> (Ḣ)	9	<code>\textsublhalfring</code> (Ḃ)	12
<code>\textmarried</code> (Ḣ)	56	<code>\textrevepsilon</code> (Ḣ)	9, 62	<code>\textsubplus</code> (Ḃ)	12
<code>\textmho</code> (Ḣ)	45	<code>\textreversedvideobend</code> (Ḣ)	54	<code>\textsubrhalfring</code> (Ḃ)	12
<code>\textmidacute</code> (Ḣ)	12	<code>\textrevglotstop</code> (Ḣ)	9	<code>\textsubring</code> (Ḣ)	12
<code>\textminus</code> ($-$)	43	<code>\textrevyogh</code> (Ḣ)	9	<code>\textsubsquare</code> (Ḣ)	12
<code>\textmu</code> (μ)	45, 74	<code>\texttrhookrepsilon</code> (Ḣ)	10	<code>\textsubtilde</code> (Ḣ)	12
<code>\textmusicalnote</code> (Ḣ)	15	<code>\texttrhookschwa</code> (Ḣ)	10	<code>\textsubumlaut</code> (Ḣ)	12
<code>\textnaira</code> (₦)	14	<code>\texttrhoticity</code> (Ḣ)	10	<code>\textsubw</code> (Ḣ)	12
<code>\textnineoldstyle</code> (9)	15	<code>\texttrightarrow</code> (\rightarrow)	28	<code>\textsubwedge</code> (Ḣ)	12
<code>\textnumero</code> (N°)	15	<code>\texttringmacron</code> (Ḣ)	12	<code>\textsuperimposetilde</code> (Ḣ)	12
<code>\textObardotlessj</code> (Ḣ)	9	<code>\textroundcap</code> (Ḣ)	12	<code>\textsuperscript</code>	13
<code>\textohm</code> (Ω)	45	<code>\texttrptr</code> (Ḣ)	10	<code>\textsurd</code> ($\sqrt{}$)	43
<code>\textOlyoghlig</code> (Ḣ)	9	<code>\texttrquill</code> (Ḣ)	36	<code>\textswab</code>	44
<code>\textomega</code> (ω)	9	<code>\texttrtaild</code> (Ḣ)	10	<code>\textsyllabic</code> (Ḣ)	12
<code>\textonehalf</code> ($\frac{1}{2}$)	43, 74	<code>\texttrtailn</code> (Ḣ)	9	<code>\texttctclig</code> (Ḣ)	9
<code>\textoneoldstyle</code>	15	<code>\texttrtailr</code> (Ḣ)	9	<code>\texttshlig</code> (Ḣ)	9
<code>\textoneoldstyle</code> (1)	15	<code>\texttrtails</code> (Ḣ)	9	<code>\textttheta</code> (θ)	9
<code>\textonequarter</code> ($\frac{1}{4}$)	43, 74	<code>\texttrtailt</code> (Ḣ)	9	<code>\texttthorn</code> (Ḣ)	9
<code>\textonesuperior</code> (¹)	43, 74	<code>\texttrtailz</code> (Ḣ)	9	<code>\textthreethird</code> ($\frac{1}{3}$)	15
<code>\textopenbullet</code> (⬢)	15	<code>\texttrthook</code> (Ḣ)	9	<code>\textthreethirds</code> ($\frac{2}{3}$)	43, 74
<code>\textopencorner</code> (Ḣ)	9	<code>\texttsca</code> (A)	9	<code>\textthreethirdsemdash</code> (—)	15
<code>\textopeno</code> (Ḣ)	9	<code>\texttscb</code> (B)	9	<code>\textthreesuperior</code> (³)	43, 74
<code>\textordfeminine</code> (ª)	7, 15, 74	<code>\texttsce</code> (E)	9	<code>\texttildedot</code> (Ḣ)	13
<code>\textordmasculine</code> (ᵃ)	7, 15, 74	<code>\texttsce</code> (E)	9	<code>\texttildelow</code> (Ḣ)	15, 72
<code>\textovercross</code> (Ḣ)	12	<code>\textscg</code> (G)	9	<code>\texttimes</code> (\times)	43
<code>\textoverw</code> (Ḣ)	12	<code>\textsch</code> (H)	9	<code>\texttoneletterstem</code> (Ḣ)	9
<code>\textpalhook</code> (Ḣ)	9	<code>\textschwa</code> (ə)	9	<code>\texttrademark</code> (™)	7, 15
<code>\textparagraph</code> (¶)	7, 15	<code>\textsci</code> (I)	9	<code>\texttlig</code> (ts)	9
<code>\textperiodcentered</code> (.)	7, 15, 74	<code>\textscj</code> (J)	9	<code>\textturna</code> (Ḣ)	9
<code>\textpertenthousand</code> (‰)	15	<code>\textscL</code> (L)	9	<code>\textturncelig</code> (Ḣ)	9
<code>\textperthousand</code> (‰)	15				
<code>\textpeso</code> (₱)	14				

<code>\textturnh</code> (\mathfrak{h})	9	Times (PostScript font)	14	<code>\u</code> (\mathfrak{u})	11
<code>\textturnk</code> (\mathfrak{k})	9	timing (package)	45	<code>\ubar</code> (\mathfrak{u})	11
<code>\textturnlongleg</code> (\mathfrak{l})	9	tipa (package)	9–11, 13, 62, 75, 76	<code>\ubulb.fd</code> (file)	69, 70
<code>\textturnm</code> (\mathfrak{m})	9	<code>\to</code>	<i>see</i> <code>\rightarrow</code>	<code>\udesc</code> (\mathfrak{u})	11
<code>\textturnmrleg</code> (\mathfrak{m})	9	<code>\ToBottom</code> (\mathfrak{T})	57	<code>\udot</code> (\mathfrak{u})	19
<code>\textturnr</code> (\mathfrak{r})	9	<code>\tone</code>	10	<code>\ulcorner</code> (\mathfrak{r})	34
<code>\textturnrrtail</code> (\mathfrak{r})	9	<code>\top</code> (\mathfrak{T})	33, 63	<code>\ulcorner</code> (\mathfrak{r})	34
<code>\textturnscripta</code> (\mathfrak{s})	9	<code>\topbot</code> (\mathfrak{T})	63, 65	ulsy (package)	19, 30, 75
<code>\textturnt</code> (\mathfrak{t})	9	<code>\topdoteq</code> (\mathfrak{T})	24	umlaut	<i>see</i> accents
<code>\textturnv</code> (\mathfrak{v})	9	<code>\ToTop</code> (\mathfrak{T})	57	<code>\unclear</code> (∞)	59
<code>\textturnw</code> (\mathfrak{w})	9	trademark	<i>see</i> <code>\texttrademark</code>	<code>\underaccent</code>	65
<code>\textturny</code> (\mathfrak{y})	9	<code>\TransformHoriz</code> ($\circ\bullet$)	25	<code>\underarch</code> (\mathfrak{u})	13
<code>\texttwelvewardash</code> (---)	15	transforms	25, 37, <i>see also</i>	<code>\underbrace</code> (\mathfrak{u})	40
<code>\texttwooldstyle</code>	15	alphabets, math		<code>\underbrace</code> (\mathfrak{u})	38
<code>\texttwooldstyle</code> (2)	15	<code>\TransformVert</code> (\mathfrak{v})	25	<code>\underbracket</code>	65, 66
<code>\texttwosuperior</code> (2)	43, 74	transversality	<i>see</i> <code>\pitchfork</code>	<code>\underbracket</code> (\mathfrak{u})	66
<code>\textunderscore</code> (---)	7	trfsigns (package)	25, 34, 37, 75	<code>\underdotted</code> (\mathfrak{u})	13
<code>\textuparrow</code> (\uparrow)	28	<code>\triangle</code> (Δ)	42	<code>\undergroup</code> (\mathfrak{u})	40
<code>\textupsilon</code> (\mathfrak{u})	9	triangle relations	28	<code>\underleftarrow</code> (\mathfrak{u})	39
<code>\textupstep</code> (\mathfrak{u})	9	<code>\TriangleDown</code> (∇)	53	<code>\underleftarrow</code> (\mathfrak{u})	39
<code>\textvbaraccent</code> (\mathfrak{u})	13	<code>\TriangleDown</code> (∇ vs. ∇)	61	<code>\underleftrightharrow</code> (\mathfrak{u})	39
<code>\textvline</code> (\mathfrak{u})	10	<code>\TriangleDown</code> (∇)	53	<code>\underline</code> (\mathfrak{u})	38
<code>\textvbyi</code> (\mathfrak{u})	10	<code>\triangledown</code> (∇)	42	<code>\underparenthesis</code>	65, 66
<code>\textvbyy</code> (\mathfrak{u})	10	<code>\TriangleLeft</code> (\triangleleft)	53	<code>\underparenthesis</code> (\mathfrak{u})	66
<code>\textvisiblespace</code> (---)	7	<code>\triangleleftleft</code> (\triangleleft)	28	<code>\underrightarrow</code> (\mathfrak{u})	39
<code>\textwon</code> (\mathfrak{W})	14	<code>\triangleleftleft</code> (\triangleleft)	17	<code>\underring</code> (\mathfrak{u})	13
<code>\textwynn</code> (\mathfrak{p})	10	<code>\trianglelefteq</code> (\trianglelefteq)	28	underscore	<i>see</i> <code>_</code>
<code>\textyen</code> (\mathfrak{Y})	14, 74	<code>\trianglelefteq</code> (\trianglelefteq)	28	underscore (package)	7
<code>\textyogh</code> (\mathfrak{y})	10	<code>\trianglelefteq</code> (\trianglelefteq)	28	undertilde (package)	40, 75, 76
<code>\textzerooldstyle</code> (o)	15	<code>\trianglelefteq</code> (\trianglelefteq)	28	<code>\undertilde</code> (\mathfrak{u})	13
<code>\TH</code> (\mathfrak{P})	8	<code>\trianglelefteq</code> (\trianglelefteq)	17, 28	<code>\underwedge</code> (\mathfrak{u})	13
<code>\th</code> (\mathfrak{p})	8	<code>\TriangleRight</code> (\triangleright)	53	union	<i>see</i> <code>\cup</code>
Thành, Hàn Thê	65	<code>\trianglerightright</code> (\triangleright)	28	<code>\unitedpawns</code> (∞)	59
<code>\therefore</code> (\mathfrak{u})	24	<code>\trianglerightright</code> (\triangleright)	17	units (package)	43
<code>\therefore</code> (\mathfrak{u})	23	<code>\trianglerightrighteq</code> (\trianglerighteq)	28	unity (\mathfrak{u})	<i>see</i> alphabets, math
<code>\Thermo</code>	58	<code>\trianglerightrighteq</code> (\trianglerighteq)	28	universa (package)	54, 57, 75, 76
<code>\Theta</code> (Θ)	32	<code>\trianglerightrighteqslant</code> (\trianglerighteq)	28	<code>\unlhd</code> (\triangleleft)	17, 18
<code>\theta</code> (θ)	32	triangles	42, 53, 54	<code>\unrhd</code> (\triangleright)	17, 18
<code>\thetaup</code> (θ)	32	<code>\TriangleUp</code> (\triangle)	53	<code>\upalpha</code> (α)	33
<code>\thickapprox</code> (\approx)	23	<code>\TriangleUp</code> (\triangle vs. \triangle)	61	<code>\UParrow</code> (\mathfrak{u})	56
<code>\thicksim</code> (\sim)	23	<code>\TriangleUp</code> (\triangle)	53	<code>\Uparrow</code> (\mathfrak{u})	28, 35
<code>\thickvert</code> (\mathfrak{u})	35	<code>\triple</code>	36	<code>\uparrow</code> (\mathfrak{u})	28, 35
thin space	71	trsym (package)	25, 75, 76	<code>\upbar</code>	13
<code>\ThinFog</code> (\mathfrak{u})	58	<code>\Tsteel</code> (\mathfrak{T})	47	<code>\upbeta</code> (β)	33
<code>\third</code> (\mathfrak{u})	42	<code>\TTsteel</code> (\mathfrak{T})	47	<code>\upbracketfill</code>	66
<code>\Thorn</code> (\mathfrak{P})	8	TUGboat	38	<code>\upchi</code> (χ)	33
<code>\thorn</code> (\mathfrak{p})	10	<code>\Tumbler</code> (\mathfrak{u})	57	<code>\Updelta</code> (Δ)	33
<code>\thorn</code> (\mathfrak{p})	11	<code>\TwelveStar</code> (\mathfrak{u})	52	<code>\updelta</code> (δ)	33
<code>\thorn</code> (\mathfrak{p})	8	<code>\twoheadleftarrow</code> (\mathfrak{u})	29	<code>\Updownarrow</code> (\mathfrak{u})	28, 35
tilde	7, 9–11, 13, 15, 37, 38, 40, 65, 72	<code>\twoheadrightarrow</code> (\mathfrak{u})	29	<code>\updownarrow</code> (\mathfrak{u})	28, 35
extensible	38, 40	<code>\twonotes</code> (\mathfrak{u})	56	<code>\updownarrows</code> (\mathfrak{u})	30
vertically centered	72	txfonts (package)	17, 18, 22–29, 31–34, 42, 44, 60, 62, 72, 75, 76	<code>\updownharpoons</code> (\mathfrak{u})	30
<code>\tilde</code> (\mathfrak{u})	37, 65	Type 1 (PostScript font)	70	<code>\upepsilon</code> (ϵ)	33
<code>\tildel</code> (\mathfrak{t})	10			<code>\upeta</code> (η)	33
time of day	58			<code>\Upgamma</code> (Γ)	33
<code>\timelimit</code> (\mathfrak{u})	59			<code>\upgamma</code> (γ)	33
<code>\times</code> (\times)	17			upgreek (package)	33, 75, 76

\backslash upharpoonleft (\lceil)	30	\backslash ut (\blacksquare)	13	\backslash varolessthan (\ominus)	18
\backslash upharpoonleft (\lceil)	29	\backslash utilde ($\text{\~{u}}$)	40	\backslash varomega (ω)	11
\backslash upharpoonright (\rceil)	30			\backslash varominus (\ominus)	18
\backslash upharpoonright (\rceil)	29	V		\backslash varopeno (\oslash)	11
\backslash upiota (ι)	33	\backslash v (\blacksquare)	11	\backslash varoplus (\oplus)	18
\backslash upkappa (κ)	33	\backslash vara (α)	11	\backslash varoslash (\oslash)	18
\backslash Uplambda (Λ)	33	\backslash varangle (\angle)	42	\backslash varotimes (\otimes)	18
\backslash uplambda (λ)	33	\backslash varbigcirc (\bigcirc)	18	\backslash varovee (\oslash)	18
\backslash uplett	13	\backslash VarClock ($\text{\textcircled{C}}$)	58	\backslash varowedge (\oslash)	18
\backslash uplus (\uplus)	19	\backslash varclubsuit (\clubsuit)	42	\backslash varparallel ($//$)	24
\backslash uplus (\uplus)	17	\backslash varcurlyvee (\vee)	18	\backslash varparallelinv ($\backslash\parallel$)	24
\backslash upmu (μ)	33	\backslash varcurlywedge (\wedge)	18	\backslash varphi (φ)	32
\backslash upnu (ν)	33	\backslash vardiamondsuit (\diamond)	42	\backslash varphiup (φ)	32
\backslash Upomega (Ω)	33	\backslash varEarth (δ)	46	\backslash varpi (ϖ)	32
\backslash upomega (ω)	33	\backslash varepsilon (ε)	32	\backslash varpiup (ϖ)	32
\backslash upp (\wedge)	13	\backslash varepsilonup (ε)	32	\backslash varprod (\times)	22
\backslash upparentfill	66	\backslash VarFlag ($\text{\textcircled{V}}$)	58	\backslash varprojlim (\varprojlim)	31
\backslash Upphi (Φ)	33	$\text{varg (txfonts/pxfonts package option)}$	33	\backslash varpropto (\propto)	23
\backslash upphi (ϕ)	33	\backslash varg (g)	33	\backslash varrho (ϱ)	32
\backslash Uppi (Π)	33	\backslash varg (g)	11	\backslash varrhoup (ϱ)	32
\backslash uppi (π)	33	\backslash varg (g)	11	\backslash varsigma (ς)	32
\backslash Upsi (Ψ)	33	\backslash varg (g)	11	\backslash varsigmaup (ς)	32
\backslash uppsi (ψ)	33	\backslash varg (g)	11	\backslash varspadesuit (\spadesuit)	42
\backslash upquote (package)	72	\backslash varg (g)	11	\backslash varsqsubsetneq (\sqsubsetneq)	26
\backslash uprho (ρ)	33	\backslash varg (g)	11	\backslash varsqsubsetneqq (\sqsubsetneqq)	26
upright Greek letters	32, 33	\backslash varg (g)	11	\backslash varsqsupsetneq (\sqsupsetneq)	26
upside-down symbols	62	\backslash varg (g)	11	\backslash varsqsupsetneqq (\sqsupsetneqq)	26
\backslash Upsilon (Σ)	33	\backslash varg (g)	11	\backslash varstar ($*$)	19
\backslash upsigma (σ)	33	\backslash varg (g)	11	\backslash varsubsetneq (\subsetneq)	26
\backslash Upsilon (Υ)	32	\backslash varg (g)	11	\backslash varsubsetneq (\subsetneq)	26
\backslash upsilon (υ)	32	\backslash varg (g)	11	\backslash varsubsetneqq (\subsetneqq)	26
\backslash upsilonup (υ)	32	\backslash varg (g)	11	\backslash varsubsetneqq (\subsetneqq)	26
\backslash upt (\perp)	13	\backslash varg (g)	11	\backslash varsubsetneqq (\subsetneqq)	26
\backslash uptau (τ)	33	\backslash varg (g)	11	\backslash VarSummit (Δ)	58
\backslash Uptheta (Θ)	33	\backslash varg (g)	11	\backslash varsupsetneq (\supsetneq)	26
\backslash uptheta (θ)	33	\backslash varg (g)	11	\backslash varsupsetneq (\supsetneq)	26
\backslash uptodownarrow (\Downarrow)	30	\backslash varg (g)	11	\backslash varsupsetneqq (\supsetneqq)	26
\backslash upuparrows (\Uparrow)	30	\backslash varg (g)	11	\backslash varsupsetneqq (\supsetneqq)	26
\backslash upuparrows (\Uparrow)	29	\backslash varg (g)	11	\backslash varsupsetneqq (\supsetneqq)	26
\backslash upupharpoons (\Updownarrow)	30	\backslash varg (g)	11	\backslash VarTaschenuhr ($\text{\textcircled{V}}$)	58
\backslash Upupsilon (Υ)	33	\backslash varg (g)	11	\backslash vartheta (ϑ)	32
\backslash upupsilon (υ)	33	\backslash varg (g)	11	\backslash varthetaup (ϑ)	32
\backslash upvarepsilon (ε)	33	\backslash varg (g)	11	\backslash vartimes (\times)	18
\backslash upvarphi (φ)	33	\backslash varg (g)	11	\backslash vartriangle (Δ)	42
\backslash upvarpi (ϖ)	33	\backslash varg (g)	11	\backslash vartriangleleft (\triangleleft)	28
\backslash upvarrho (ϱ)	33	\backslash varg (g)	11	\backslash vartriangleleft (\triangleleft)	28
\backslash upvarrho (ϱ)	33	\backslash varg (g)	11	\backslash vartriangleright (\triangleright)	28
\backslash upvarsigma (ς)	33	\backslash varg (g)	11	\backslash vartriangleright (\triangleright)	28
\backslash upvartheta (ϑ)	33	\backslash varg (g)	11	\backslash varv (v)	33
\backslash Upxi (Ξ)	33	\backslash varg (g)	11	\backslash varw (w)	33
\backslash upxi (ξ)	33	\backslash varg (g)	11	\backslash vary (y)	33
\backslash upzeta (ζ)	33	\backslash varg (g)	11	\backslash VBar (\textbar)	53
\backslash Uranus (δ)	46	\backslash varg (g)	11	\backslash VDash (\textbar)	24
\backslash Uranus (δ)	46	\backslash varg (g)	11	\backslash Vdash (\textbar)	24
\backslash uranus (δ)	45	\backslash varg (g)	11	\backslash Vdash (\textbar)	23
\backslash urcorner (\textasciitilde)	34	\backslash varg (g)	11	\backslash vDash (\textbar)	24
\backslash urcorner (\textasciitilde)	34	\backslash varg (g)	11	\backslash vDash (\textbar)	23
\backslash url (package)	72	\backslash varg (g)	11	\backslash vdash (\textbar)	23
\backslash US (\blacktriangledown)	47	\backslash varg (g)	11	\backslash vdots (\vdots)	41
\backslash usepackage	6	\backslash varg (g)	11		

<code>\vec</code> ($\vec{}$)	37
<code>\Vectorarrow</code> ($\overrightarrow{}$)	43
<code>\Vectorarrowhigh</code> ($\overrightarrow{}$)	43
<code>\vee</code> (\vee)	19
<code>\vee</code> (\vee)	17
<code>\veebar</code> (\veebar)	19
<code>\veebar</code> (\veebar)	17
<code>\veedoublebar</code> (\veedoublebar)	19
<code>\Venus</code> ($\text{\textcircled{V}}$)	46
<code>\Venus</code> ($\text{\textcircled{V}}$)	46
<code>\venus</code> ($\text{\textcircled{v}}$)	45
<code>\vernal</code> ($\text{\textcircled{V}}$)	45
<code>\Vert</code> ($\ $)	35
<code>\vert</code> ($ $)	35
<code>\VHF</code> (\approx)	45
<code>\Village</code> ($\text{\textcircled{V}}$)	58
<code>\vin</code> ($\text{\textcircled{V}}$)	34
<code>\Virgo</code> ($\text{\textcircled{V}}$)	46
<code>\virgo</code> ($\text{\textcircled{v}}$)	46
<code>\vod</code> ($\text{\textcircled{V}}$)	11
<code>\voicedh</code> ($\text{\textcircled{V}}$)	11
<code>\VT</code> ($\text{\textcircled{V}}$)	47
<code>\vv</code> ($\text{\textcircled{V}}$)	40
<code>\VvDash</code> ($\text{\textcircled{V}}$)	24
<code>\Vvdash</code> ($\text{\textcircled{V}}$)	24
<code>\Vvdash</code> ($\text{\textcircled{V}}$)	23
<code>\vvvert</code> ($\text{\textcircled{V}}$)	35

W

<code>\WashCotton</code> ($\text{\textcircled{W}}$)	57
<code>\WashSynthetics</code> ($\text{\textcircled{W}}$)	57
<code>\WashWool</code> ($\text{\textcircled{W}}$)	57
<code>\wasylounge</code> ($\text{\textcircled{W}}$)	56
<code>\wasypropto</code> (\propto)	23
<code>wasysym</code> (package)	8, 14, 15, 17, 18, 20, 23, 25–28, 42, 45–47, 51, 52, 56, 61, 75, 76
<code>\wasytherefore</code> (\therefore)	42
<code>\wbetter</code> (\pm)	59
<code>\wdecisive</code> ($+-$)	59

<code>\weakpt</code> (\times)	59
<code>\WeakRain</code> ($\text{\textcircled{W}}$)	58
<code>\WeakRainCloud</code> ($\text{\textcircled{W}}$)	58
weather symbols	58
<code>\Wecker</code> ($\text{\textcircled{W}}$)	58
<code>\wedge</code> (\wedge)	19
<code>\wedge</code> (\wedge)	17
Weierstrass \wp function	<i>see</i> <code>\wp</code>
<code>\Wheelchair</code> ($\text{\textcircled{W}}$)	54
<code>\widearrow</code> ($\text{\textcircled{W}}$)	40
<code>\widebar</code> ($\text{\textcircled{W}}$)	40
<code>\widecheck</code> ($\text{\textcircled{W}}$)	40
<code>\widehat</code> ($\text{\textcircled{W}}$)	38
<code>\wideparen</code> ($\text{\textcircled{W}}$)	40
<code>\wideparen</code> ($\text{\textcircled{W}}$)	38

<code>\widering</code> ($\text{\textcircled{W}}$)	40
<code>\widering</code> ($\text{\textcircled{W}}$)	38
<code>\widetilde</code> ($\text{\textcircled{W}}$)	38, 40
<code>\widetriangle</code> ($\text{\textcircled{W}}$)	38
<code>\wind</code>	58
Windows	73
<code>\with</code> ($\text{\textcircled{W}}$)	59
<code>\withattack</code> ($\text{\textcircled{W}}$)	59
<code>\withidea</code> ($\text{\textcircled{W}}$)	59
<code>\within</code> ($\text{\textcircled{W}}$)	59
<code>\without</code> ($\text{\textcircled{W}}$)	59
<code>\Womanface</code> ($\text{\textcircled{W}}$)	57
won	<i>see</i> <code>\textwon</code>
<code>\wp</code> (\wp)	33
<code>\wr</code> (\wr)	17
wreath product	<i>see</i> <code>\wr</code>
<code>\Writinghand</code> ($\text{\textcircled{W}}$)	54
<code>wsuipa</code> (package)	10, 13, 61, 62, 65, 75, 76
<code>\wupperhand</code> (\pm)	59

X

<code>\XBox</code> (\boxtimes)	51
Xdvi	62

<code>\Xi</code> (Ξ)	32
<code>\xi</code> (ξ)	32
<code>\xiup</code> (ξ)	32
<code>\xleftarrow</code> ($\xleftarrow{}$)	39
XML	73
<code>\xrightarrow</code> ($\xrightarrow{}$)	39
<code>\xrightleftharpoons</code> ($\xrightleftharpoons{}$)	39
Xs	51, 54
<code>\XSolid</code> (\times)	51
<code>\XSolidBold</code> (\times)	51
<code>\XSolidBrush</code> (\times)	51
Xy-pic	64

Y

<code>\Ydown</code> ($\text{\textcircled{Y}}$)	18
yen	<i>see</i> <code>\textyen</code>
yfonts (package)	44, 75, 76
yhmath (package)	37, 38, 40, 41, 65, 75
<code>\Yinyang</code> ($\text{\textcircled{Y}}$)	57
<code>\Yleft</code> ($\text{\textcircled{Y}}$)	18
<code>\yogh</code> ($\text{\textcircled{Y}}$)	10
<code>\yogh</code> ($\text{\textcircled{Y}}$)	11
<code>\Yright</code> ($\text{\textcircled{Y}}$)	18
<code>\Yup</code> ($\text{\textcircled{Y}}$)	18

Z

Zapf Chancery (PostScript font)	44
Zapf Dingbats (PostScript font)	49, 51
zapfchan (package)	75
<code>\Zborder</code> ($\text{\textcircled{Z}}$)	54
<code>\zeta</code> (ζ)	32
<code>\zetaaup</code> (ζ)	32
<code>\Zodiac</code>	46
zodiacal symbols	46
<code>\Ztransf</code> ($\text{\textcircled{Z}}$)	25
<code>\ztransf</code> ($\text{\textcircled{Z}}$)	25
<code>\zugzwang</code> ($\text{\textcircled{Z}}$)	59