

Critical Review: Exploring Interactions with Physically Dynamic Bar Charts

Introduction

Studies investigating how data can be effectively presented to, explored and interpreted by users forms the core part of Information Visualisation (‘InfoVis’) to support users in the decision-making process [Card and Mackinlay, 1997]. This review summarises and critically analyses Taher et al. [2015] whose paper explores the use of physically dynamic bar charts as devices for exploring user interactions with visualisations of data, to determine future work in this domain of Information Visualisation.

Summary of Contributions

Taher et al. extend existing work on physical visualisations (*physicalizations*) [Jansen et al., 2015] to investigate how users interact with *physically dynamic* bar charts as a way of exploring and manipulating shape-changing visualisations of datasets. Existing work into physicalizations involve problematic *static* models that do not respond to user interactions [Jansen et al., 2013] and are therefore “*disconnected*” from the data source when created. With the advent of shape-changing technology [Rasmussen et al., 2012], there is scope for the manufacture of physically dynamic displays to help decision makers reason about and manipulate data sets in a non-virtual and non-static way. This motivation leads Taher et al. to explore the ways users interact with data displayed in this mode to understand whether *physical* interactions (such as touching specific bars) or *gestures* (such as swiping a touch-screen) or a *combination* of the two is more intuitive to users when solving common problems. Whilst the authors concede that physical dynamic visualisations are not new [Leithinger and Ishii, 2010, Follmer et al., 2013], they claim there is little analysis into effective *interactions* with data of *dynamic* physical modality, unlike the abundance of work investigating their static counterparts [Stusak and Aslan, 2014].

The point system to support the author’s research is *EMERGE* - a 10×10 physical bar chart which uses a set of dynamic self-actuating rods with an RGB display projected onto it (Figure 1). An immediate and obvious limitation of using a Bar Chart point system is that any conclusions drawn about its effectiveness in physically-dynamic form cannot be generalised to other types of InfoVis systems, such as Dynamic Histograms, Parallel Coordinates and Theme Rivers without further research.

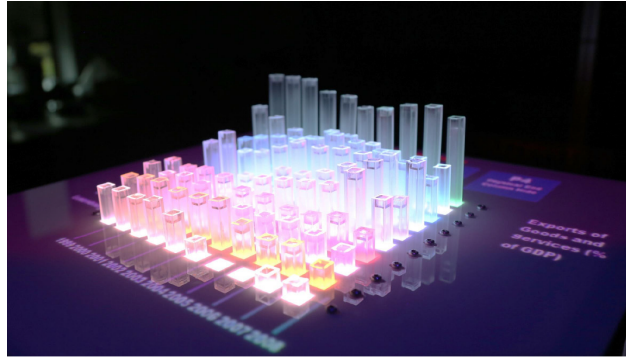


Figure 1: EMERGE: Exploring Interactions with Physically Dynamic Bar Charts using actuating physical rods and RGB LEDs to display international export data.

EMERGE allows users to interact with the dataset it represents using a set of 4 interaction-sets derived from subcategories of the taxonomy of interactive dynamics for visual analysis described by Heer and Shneiderman [2012] - *annotation*, *filtering*, *organisation* and *navigation* (Table 1). Heer and Shneiderman lay out 3 high-level categories in their model - *Data and View Specification*, *View Manipulation*, and *Process and Provenance*. (Figure 2). In this sense, whilst the selection of InfoVis model is careful and grounded in background theory, the choice of subcategories by Taher et al. for interacting with EMERGE is somewhat arbitrary and limited in scope with little justification, which immediately invites further research into different forms of interactions with physicalisations from the taxonomy.

Table 1: Task-sets and interaction techniques explored during the user study with EMERGE: *annotation*, *filtering*, *organisation* and *navigation* with the category of Heer and Shneiderman [2012] in **bold**.

| Task | Overview | Interaction Techniques |
|--|--|---|
| Annotation (Process & provenance) | Selecting and marking individual data points. | Point, pull, press. |
| Filtering (Data view & specification) | Hiding and refining data for enhanced perception and comparison. | Swipe away, manual press, assisted press, press shortcut, and press to compare. |
| Organization (View manipulation) | Data arrangement by moving rows and columns. | Drag and drop with immediate transition and hide-all with transition, press with instant transition and hide-all with transition. |
| Navigation (View manipulation) | Controlling the view of large data sets. | Scroll, directional arrows, directional press, and paging. |

| | |
|------------------------------------|---|
| Data and View Specification | Visualize data by choosing visual encodings. |
| | Filter out data to focus on relevant items. |
| | Sort items to expose patterns. |
| | Derive values or models from source data. |
| View Manipulation | Select items to highlight, filter, or manipulate them. |
| | Navigate to examine high-level patterns and low-level detail. |
| | Coordinate views for linked, multidimensional exploration. |
| | Organize multiple windows and workspaces. |
| Process and Provenance | Record analysis histories for revisitation, review, and sharing. |
| | Annotate patterns to document findings. |
| | Share views and annotations to enable collaboration. |
| | Guide users through analysis tasks or stories. |

Figure 2: Taxonomy of interactive dynamics described by Heer and Shneiderman [2012].

Main contributions of Taher et al. [2015] are threefold. First, a set of 14 potential interactions (both physical and gesture based) for manipulating and exploring data presented in dynamic physical bar charts such as EMERGE. Second, the findings of their user study ($N = 17$) evaluates which of the interactions are effective and intuitive in completing a set of analysis tasks, and which interactions match users’ initial preconceptions for how to achieve these tasks. Finally, a set of design considerations to advise future research on the challenges of presenting data in physically dynamic form. Overall, we learn that a *combination* of gestures and physical interactions are effective. Smaller interactions such as annotation of specific data points can be afforded by physical interaction whereas larger interactions such as organization can be afforded touch-screen gestures.

Justifications for Conclusions

Taher et al. set about their investigations by creating a list of proposed or *baseline* interactions by which users could interact with EMERGE. The authors by their own admission avoided early experimentation to generate different types of interaction before the main study as existing research forewarned against this due to the immaturity of the area [Hornbæk, 2013]. Whilst this was sensible to consider, the mechanics of the baseline interactions to be used in the user study are strongly-coupled with the hardware capabilities of EMERGE and no explanation is given by the authors into where the inspiration for each proposed interaction came from, which causes some early concern over generalisability of results to other implementations of physically dynamic bar charts.

The paper’s user study ($N = 17$, 6 female)

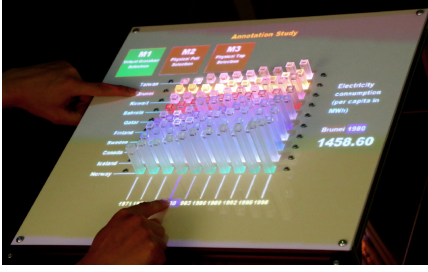


Figure 3: Annotation (Point technique).

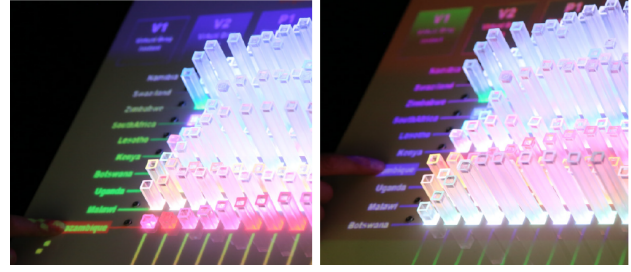


Figure 4: Organisation (Drag and Drop technique).

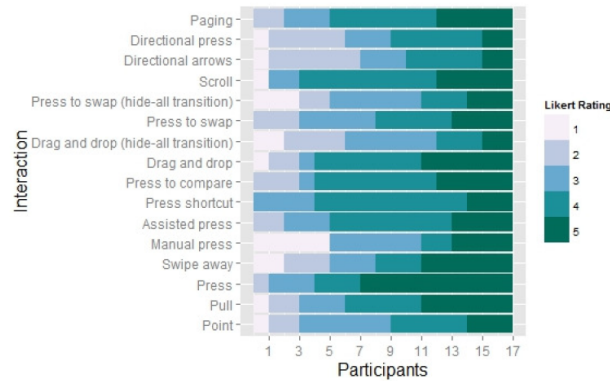


Figure 5: Likert scale ratings for helpfulness of interaction techniques. Range = 1: Strongly Disagree, 5: Strongly Agree.

The authors concede that the EMERGE's implementation presents a large limitation in their findings. Firstly, the chart itself is of a 3D modality with no vertical axis. The only meaningful vertical information is ascertained by visual comparison of bar heights rather than reading of direct data. Secondly, the representation of larger datasets would require a far more data points than the 10×10 grid currently allows for - it is likely that for higher resolution of data points, navigation interactions such as pagination would suffice whereas pressing data points to navigate between single rows would be cumbersome. Thirdly, the technical challenges discussed previously (actuation speed and noise, rod spacing, size of setup) may have also mediated or impacted the results in ways that were not accounted for. Almost all participants reacted hesitantly due to these speed and noise of actuation. Further analysis (e.g. use of parallel mediated regression testing) should investigate this.

Limitations and Suggested Further Work

Taher et al. [2015] present a respectable investigation of potential techniques to interact with data presented in a physically dynamic form and their conclusion on the usefulness of both physical and gesture-based interactions with these systems seems valid, but a set of limitations with their work leads to some questions being open to future research.

Crucially, the number of participants involved should be increased and to ensure conclusions are generalisable with external validity, the sample should be representative of the general population (approx. 50% gender split). Also, aside from the Likert scale data, the paper lacks a lot of parametric data which might provide further insight into efficacy of interactions - further controlled studies could attempt to measure performance metrics such as task completion times and accuracy for each interaction type.

Seeing as the investigation focuses on a narrow subset of the interaction taxonomy of Heer and Shneiderman [2012] on a Bar Chart, the obvious extensions to the authors' work would be to explore different interaction types such as Record, Co-ordinate and Share using EMERGE, and extend experiments across different point systems such as Dynamic Histograms, Parallel Coordinates and Theme Rivers. As *both* physical and gesture based interactions are effective for small and large grained tasks respectively, it would also be wise to see how *combining* both interactions into one activity affects findings.

The InfoVis design space is very large [Card and Mackinlay, 1997], so it would be novel to explore how users perceive dynamic physicalisations which represent complex datasets which *change* in real time - e.g. social network data [Federico et al., 2011]. As well as responding to human interaction via shape-changing interfaces, these datasets could also change of their own accord which opens up more questions into how users would respond to this type of visualisation. Another novel suggestion would be to apply these visualisations to a specific context or domain, to compare efficacy of interactions across modalities (i.e. *static physical* versus *dynamic physical* versus *virtual*). An example might be in an educational setting where kinaesthetic techniques are encouraged [Pourhosein Gilakjani, 2011]. Furthermore, investigations could also be extended to observe the effects of using dynamic physicalisations whilst a user is immersed in a VR environment, to combat a lack of 'presence' in these settings and afford data manipulation in virtual settings with physical assistance [Tennent et al., 2017]. Finally, existing work analysing use of static physicalisations for the blind [Perkins, 2002] can be extended to understand how dynamic physicalisations can offer further support in data manipulation by the visually impaired.

Conclusion

Taher et al. [2015] set the foundations for future investigations into use of shape-changing displays for accomplishment of common InfoVis tasks. Their research is limited in several ways by the implementation of the EMERGE system, but raises important design considerations for future work investigating dynamic physicalisations in other domains. Findings have potentially wider consequences in the topic of Information Visualisation - with recommendations on how to design systems supporting the fundamental interactions such as those described by Heer and Shneiderman

[2012], these visualisations can serve as effective data analysis tools in a variety of domains.

References

- S. K. Card and J. Mackinlay. The structure of the information visualization design space. In *Proceedings of the 1997 IEEE Symposium on Information Visualization (InfoVis '97)*, INFOVIS '97, pages 92–, Washington, DC, USA, 1997. IEEE Computer Society. ISBN 0-8186-8189-6. URL <http://dl.acm.org/citation.cfm?id=857188.857632>.
- Paolo Federico, Wolfgang Aigner, Silvia Miksch, Florian Windhager, and Lukas Zenk. A visual analytics approach to dynamic social networks. 09 2011. doi: 10.1145/2024288.2024344.
- Sean Follmer, Daniel Leithinger, Alex Olwal, Akimitsu Hogge, and Hiroshi Ishii. inform: Dynamic physical affordances and constraints through shape and object actuation. In *Proceedings of the 26th Annual ACM Symposium on User Interface Software and Technology*, UIST '13, pages 417–426, New York, NY, USA, 2013. ACM. ISBN 978-1-4503-2268-3. doi: 10.1145/2501988.2502032. URL <http://doi.acm.org/10.1145/2501988.2502032>.
- Jeffrey Heer and Ben Shneiderman. Interactive dynamics for visual analysis. *Commun. ACM*, 55(4):45–54, April 2012. ISSN 0001-0782. doi: 10.1145/2133806.2133821. URL <http://doi.acm.org/10.1145/2133806.2133821>.
- Kasper Hornbæk. Some whys and hows of experiments in human–computer interaction. *Found. Trends Hum.-Comput. Interact.*, 5(4):299–373, June 2013. ISSN 1551-3955. doi: 10.1561/11000000043. URL <http://dx.doi.org/10.1561/11000000043>.
- Yvonne Jansen, Pierre Dragicevic, and Jean-Daniel Fekete. Evaluating the efficiency of physical visualizations. In *Proceedings of the SIGCHI Conference on Human Factors in Computing Systems*, CHI '13, pages 2593–2602, New York, NY, USA, 2013. ACM. ISBN 978-1-4503-1899-0. doi: 10.1145/2470654.2481359. URL <http://doi.acm.org/10.1145/2470654.2481359>.
- Yvonne Jansen, Pierre Dragicevic, Petra Isenberg, Jason Alexander, Abhijit Karnik, Johan Kildal, Sriram Subramanian, and Kasper Hornbæk. Opportunities and challenges for data physicalization. In *Proceedings of the 33rd Annual ACM Conference on Human Factors in Computing Systems*, CHI '15, pages 3227–3236, New York, NY, USA, 2015. ACM. ISBN 978-1-4503-3145-6. doi: 10.1145/2702123.2702180. URL <http://doi.acm.org/10.1145/2702123.2702180>.
- Daniel Leithinger and Hiroshi Ishii. Relief: A scalable actuated shape display. In *Proceedings of the Fourth International Conference on Tangible, Embedded, and Embodied Interaction*, TEI '10, pages 221–222, New York, NY, USA, 2010. ACM. ISBN 978-1-60558-841-4. doi: 10.1145/1709886.1709928. URL <http://doi.acm.org/10.1145/1709886.1709928>.
- Chris Perkins. Cartography: progress in tactile mapping. *Progress in Human Geography*, 26(4):521–530, 2002. doi: 10.1191/0309132502ph383pr. URL <https://doi.org/10.1191/0309132502ph383pr>.
- Abbas Pourhosein Gilakjani. Visual, auditory, kinaesthetic learning styles and their impacts on english language teaching. *Journal of Studies in Education*, 2:104, 12 2011. doi: 10.5296/jse.v2i1.1007.

- Majken K. Rasmussen, Esben W. Pedersen, Marianne G. Petersen, and Kasper Hornbæk. Shape-changing interfaces: A review of the design space and open research questions. In *Proceedings of the SIGCHI Conference on Human Factors in Computing Systems*, CHI '12, pages 735–744, New York, NY, USA, 2012. ACM. ISBN 978-1-4503-1015-4. doi: 10.1145/2207676.2207781. URL <http://doi.acm.org/10.1145/2207676.2207781>.
- Simon Stusak and Ayfer Aslan. Beyond physical bar charts: An exploration of designing physical visualizations. In *CHI '14 Extended Abstracts on Human Factors in Computing Systems*, CHI EA '14, pages 1381–1386, New York, NY, USA, 2014. ACM. ISBN 978-1-4503-2474-8. doi: 10.1145/2559206.2581311. URL <http://doi.acm.org/10.1145/2559206.2581311>.
- Faisal Taher, John Hardy, Abhijit Karnik, Christian Weichel, Yvonne Jansen, Kasper Hornbæk, and Jason Alexander. Exploring interactions with physically dynamic bar charts. In *Proceedings of the 33rd Annual ACM Conference on Human Factors in Computing Systems*, CHI '15, pages 3237–3246, New York, NY, USA, 2015. ACM. ISBN 978-1-4503-3145-6. doi: 10.1145/2702123.2702604. URL <http://doi.acm.org/10.1145/2702123.2702604>.
- Paul Tennent, Joe Marshall, Brendan Walker, Patrick Brundell, and Steve Benford. The challenges of visual-kinaesthetic experience. In *Proceedings of the 2017 Conference on Designing Interactive Systems*, DIS '17, pages 1265–1276, New York, NY, USA, 2017. ACM. ISBN 978-1-4503-4922-2. doi: 10.1145/3064663.3064763. URL <http://doi.acm.org/10.1145/3064663.3064763>.