

Visual Analysis of Travel Route Recommendation

Dawei Chen
Data61 & The Australian National
University
P.O. Box 1212
Dublin, Ohio 43017-6221
trovato@corporation.com

G.K.M. Tobin
Institute for Clarity in Documentation
P.O. Box 1212
Dublin, Ohio 43017-6221
webmaster@marysville-ohio.com

Lars Thørväld
The Thørväld Group
1 Thørväld Circle
Hekla, Iceland
larst@affiliation.org

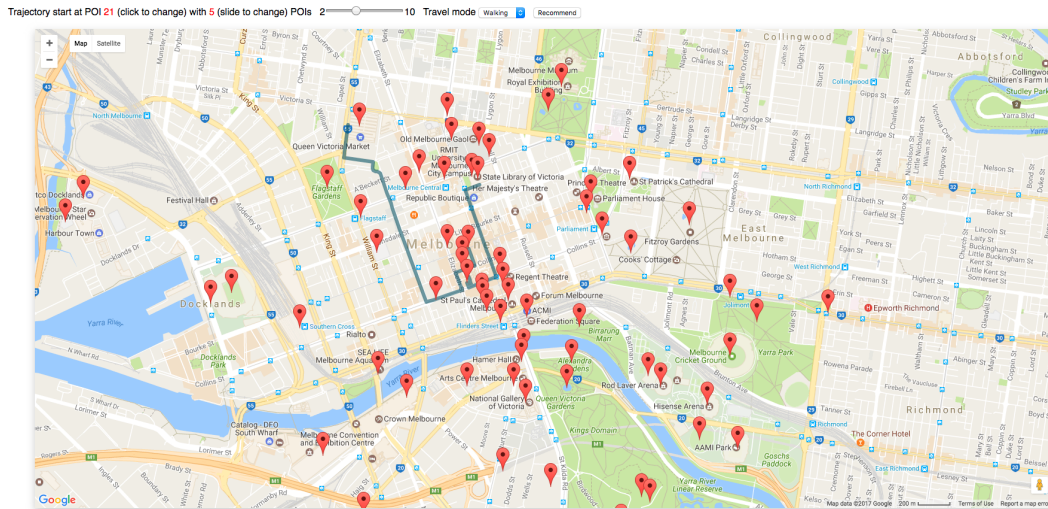


Figure 1: Travel route recommendation visualisation system. Given a starting POI and a number of POI to be visited, the system suggests a set of routes from a history of previous tourists.

ABSTRACT

We propose a novel travel route visualisation tool.

CCS CONCEPTS

• **Information systems** → **Learning to rank**; • **Human-centered computing** → **Visualization**;

KEYWORDS

Visualisation, Recommendation

ACM Reference format:

Dawei Chen, G.K.M. Tobin, and Lars Thørväld. 2017. Visual Analysis of Travel Route Recommendation. In *Proceedings of ACM Multimedia, Mountain View, CA USA, October 2017 (ACMMM2017)*, 2 pages.
https://doi.org/10.475/123_4

Permission to make digital or hard copies of part or all of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for third-party components of this work must be honored. For all other uses, contact the owner/author(s).

ACMMM2017, October 2017, Mountain View, CA USA

© 2017 Copyright held by the owner/author(s).

ACM ISBN 123-4567-24-567/08...\$15.00

https://doi.org/10.475/123_4

1 INTRODUCTION

Sequence ranking has emerged as an important tool for solving diverse problems such as travel route and music playlist recommendations. Unlike the classical ranking algorithm where each item considers independently, the sequence ranking algorithm requires modelling a structure between items and suggests a set of items as a whole. For example, let us consider recommending a trajectory of points of interest (POI) in a city to a visitor. If the classical ranking algorithm learns a user's preference for each individual location while ignores the distances between them, the algorithm may create a long trajectory, which should be shorter in optimal routing. Several sequence ranking algorithms are proposed to solve the problem and achieve relative success to compare with the classical algorithms. An important challenge remaining is to construct a visualisation of the recommendation system so that a user can analyse the suggested sequences and plan a better trip based on the interaction with the system.

In this paper, we tackle the problem of sequence visualisation, especially, in the context of a travel route recommendation. We first define and formulate the sequence ranking algorithm as a structured recommendation problem, and then we develop a novel visualisation engine that efficiently displays multiple suggested routes and helps users understand the rational behind the recommendations. Specifically, we formulate a travel route as a sequence of points-of-interest (POIs)...

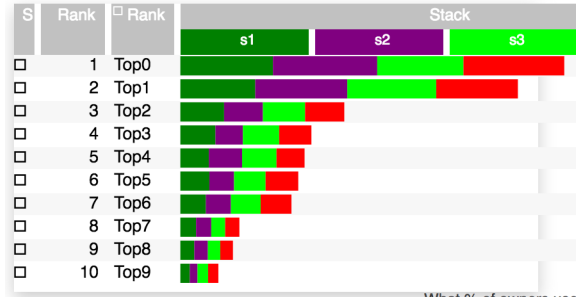


Figure 2: Visualisation of feature scores for each trajectory. From top to bottom, we represent top 10 recommended routes with their scores where each score is further decomposed into multiple features.

2 STRUCTURED PREDICTION

Travel route recommendation problems involve a set of POIs in a city. Given a trajectory query $x = (s, l)$, comprising a start POI s and trip length l , i.e. the number of POIs to be visited during the trip including s , the goal is to suggest one or more sequences of POIs that maximise some notion of utility.

We first cast the travel recommendation as a structured prediction problem, which allows us to leverage the well-studied literature of structured SVMs (SSVM) [3, 6]. There are two obstacles to prevent us applying the SSVM directly to the sequence recommendation problem; first, there would be multiple possible routes among a set of POIs, second, a naive application of SSVM would generate repeating sequence in the prediction time. To eliminate possible loop in a prediction time, we adopt serial list Viterbi [4, 5] algorithm. We finally trained our model on the trajectory data extracted from Flickr photos [1].

From a visualisation perspective, an important advantage of the SSVM is the explicit representation of feature score in its final decision process. Especially, in our case, we can disassemble the final score of a route into feature scores of each POI and each transition between two adjacency POIs. We hand-crafted POI features such as the category, popularity, average spending time of previous tourists, etc, and also crafted transition features such as the distance between two POIs, .

3 VISUALISATION

Our goal is to design an interactive system where a user The Figure 1 Break total score into individual feature score, represent using stacked bar graph.

Comparison between two POIs in a single trajectory. Further comparison of POIs within a single trajectory, we use radar chart to show the score of each feature.

We further provide a tool to analyse an internal variation between multiple POIs in a single route. Figure 3 shows the feature scores of two POIs in a single route via a radar plot.

Stacked bar plot [2]

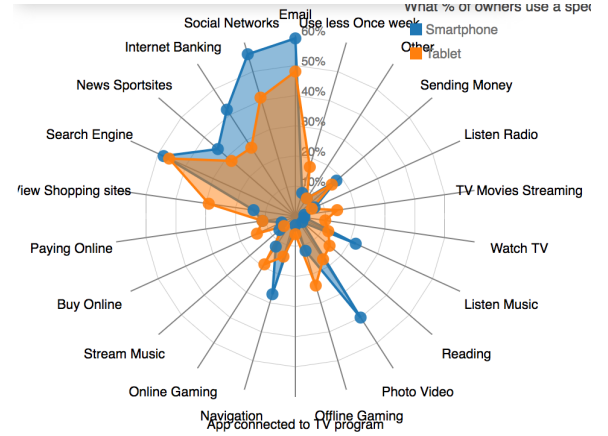


Figure 3: Visualisation of feature score for each POI within a single route.

4 CONCLUSION

REFERENCES

- [1] Dawei Chen, Cheng Soon Ong, and Lexing Xie. 2016. Learning Points and Routes to Recommend Trajectories. In *Proceedings of the 25th ACM International on Conference on Information and Knowledge Management*. ACM, 2227–2232.
- [2] Samuel Gratzl, Alexander Lex, Nils Gehlenborg, Hanspeter Pfister, and Marc Streit. 2013. Lineup: Visual analysis of multi-attribute rankings. *IEEE transactions on visualization and computer graphics* 19, 12 (2013), 2277–2286.
- [3] Thorsten Joachims, Thomas Hofmann, Yisong Yue, and Chun-Nam Yu. 2009. Predicting structured objects with support vector machines. *Commun. ACM* 52, 11 (2009), 97–104.
- [4] Christiane Nill and C-EW Sundberg. 1995. List and soft symbol output Viterbi algorithms: Extensions and comparisons. *IEEE Transactions on Communications* 43, 234 (1995), 277–287.
- [5] Nambirajan Seshadri and C-EW Sundberg. 1994. List Viterbi decoding algorithms with applications. *IEEE transactions on communications* 42, 234 (1994), 313–323.
- [6] Ioannis Tsochantaridis, Thorsten Joachims, Thomas Hofmann, and Yasemin Altun. 2005. Large margin methods for structured and interdependent output variables. *Journal of machine learning research* 6, Sep (2005), 1453–1484.