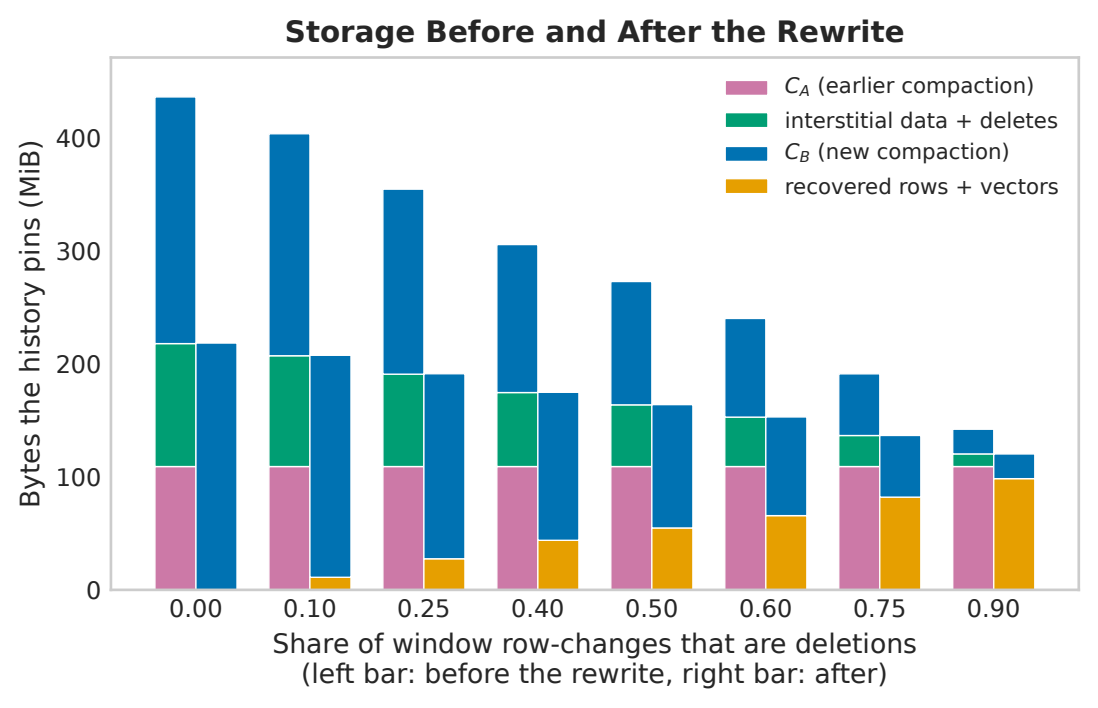
Storage Before and After the Rewrite
C_A (earlier compaction)
interstitial data + deletes
C_B (new compaction)
recovered rows + vectors
Bytes the history pins (MiB)
0
100
200
300
400
0.00
0.10
0.25
0.40
0.50
0.60
0.75
0.90
Share of window row-changes that are deletions
(left bar: before the rewrite, right bar: after)