



Charity Dupont

Agentic UX DESIGNER

Enter ▶

TODAY'S AGENDA

Agenda

01

About Charity

Background · psychology as the foundation of systems thinking

02

Case Study : Luna

Architecting the presence of an AI meeting companion

03

Wrap Up

Questions



Charity Dupont

Agentic UX Designer

Bridging behavioral science and technical execution to design agentic AI ecosystems that translate complex human intent into sophisticated, reliable partnerships.

Education: B.A. in Psychology

Origin: Chicago native, raised in New Jersey.

Focus: Systems Thinking and AI Products.

Philosophy: Dedicated to understanding how technology reshapes everyday user behavior.

CASE STUDY 01

Luna

Designing Behavior for Agentic AI

An interaction model for making AI behavior understandable, predictable, and trustworthy.

ROLE


UX Designer & Researcher

LENGTH

3-day sprint

TYPE

End-to-end Product

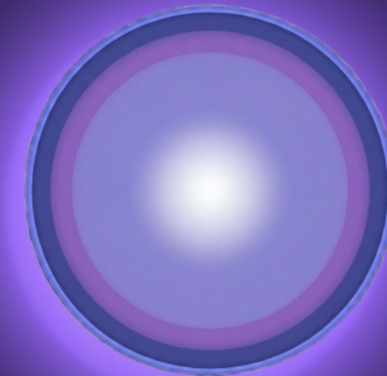

The Agentic Gap

Today's meeting assistants, such as Zoom AI Companion and Microsoft 365 Copilot can already join meetings, transcribe conversations, answer questions, and take action.

What they don't communicate is behavior.

Users cannot tell when the AI is:
Listening. Reasoning. Preparing to respond.

Without visible cues for presence, state, and intent, intelligent systems remain difficult to understand and difficult to trust.



Zoom AI Companion

Capable, but invisible



Microsoft 365 Copilot

Capable, but invisible



Luna

Present, and legible

01 · THE SPARK

From Capability to Presence

The Blind Spot


Existing AI assistants have intelligence.
They lack interaction behavior.
Users experience uncertainty.

My Design Intervention

I designed a behavioral framework that translates invisible AI state into understandable human signals.

Motion
 Color
 Timing
 Animation

I wasn't designing another interface.
 I was designing the presence of an AI teammate.

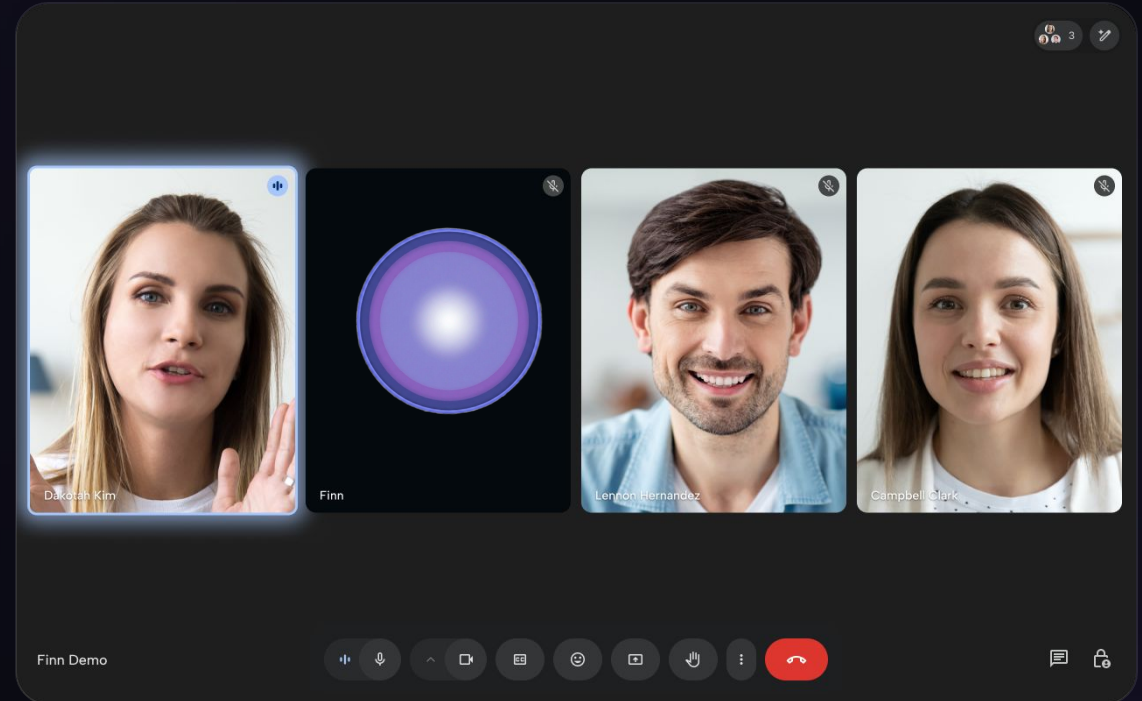

Designing Non-Verbal Communication

Humans constantly signal intent before speaking.

Eye contact.
Breathing.
Pauses.
Movement.
AI should do the same.

I designed behavioral cues that reduce uncertainty.

Signaled intent lowers cognitive load Luna restores the missing nonverbal cues through motion, color, and animation.




Architectural Principles

Each question becomes a principle

- 01 Where should Luna live? → Persistent Presence
- 02 When should Luna appear? → Progressive Disclosure
- 03 How should Luna communicate? → Legible State
- 04 How should Luna respond? → Predictable Agency


From Prototype to Product

Prototype (Standalone Hub)

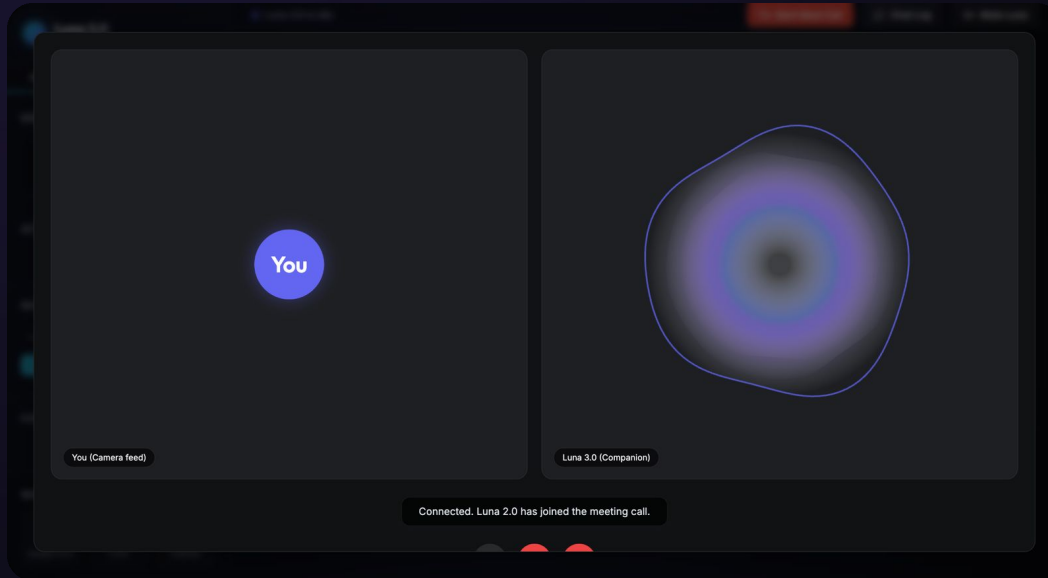

Luna initially lived inside its own dedicated video call interface

Integrated Experience

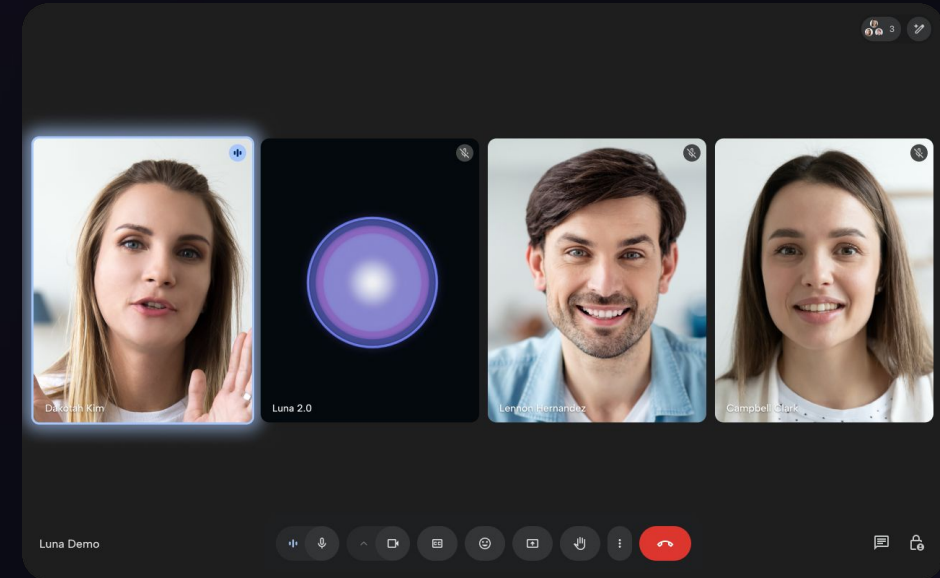


The interaction model was moved directly into Google Meet, allowing Luna to become part of the conversation instead of another application..

Design Insight: The interaction model was never meant to compete with the meeting . It was meant to become part of it.


That insight shifted Luna from a standalone concept into an integrated meeting companion.

Building the Technical Bridge

Luna runs locally while Google Meet runs inside Chrome. Understanding how those environments communicate was essential to designing a real meeting experience.

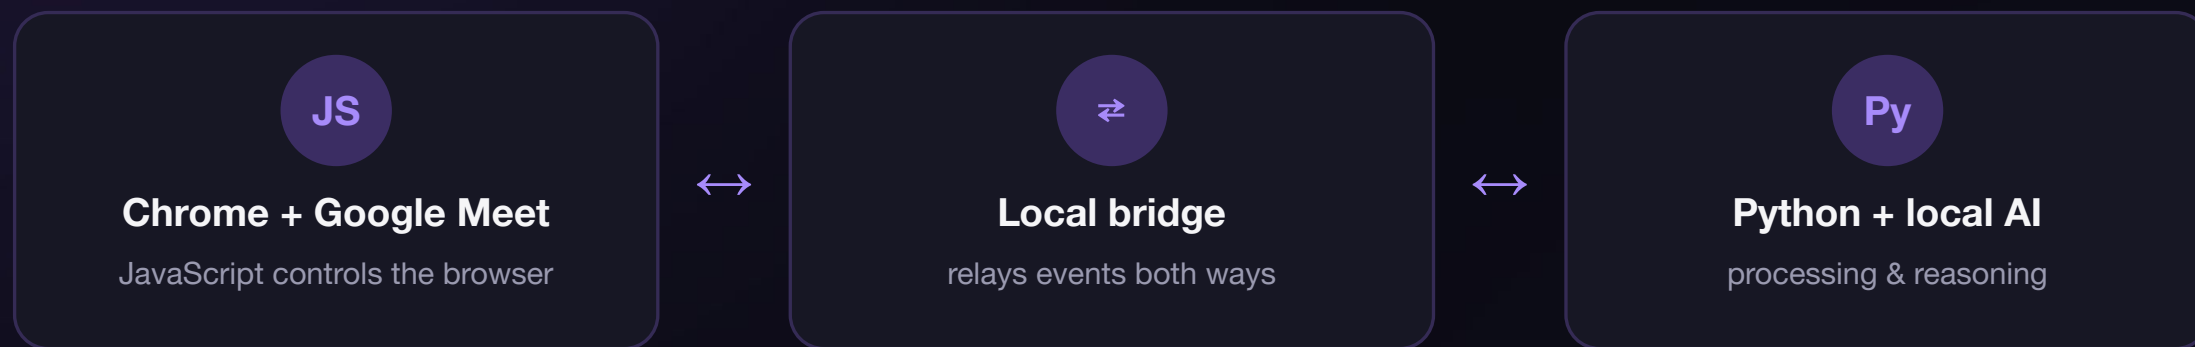

Technical concepts I needed to understand

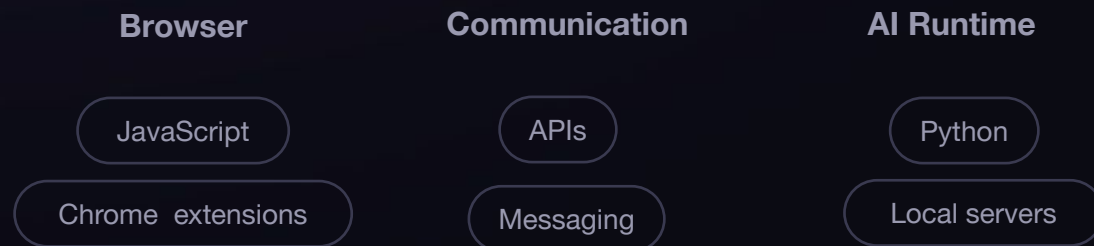

HOW I LEARNED

To make informed product decisions , I taught myself the fundamentals through documentation , engineering conversations, experimentation , and rapid prototyping/

I learned enough engineering to lead the product,not to become an engineer.

Directing the System

06 · DIRECTING THE AGENT

```

1. Active Call Detection ( JS content.js ):
    • The browser extension running in your Chrome browser monitors your tabs.
    • The moment you join a brand new Google Meet call (on your own personal non-bot tab), the script extracts the Meet code and securely posts a notification to your local Hub server.

2. Auto-Join Server Route ( JS server.js ):
    • The local Hub server receives this notification and validates the URL format using the secure regex to prevent command injection.
    • Loop Prevention: It checks if Luna is already active in that specific call. If she is already there, it does nothing. If it's a new call or if she was disconnected, it cleans up old processes and triggers the guest bot to join your new meeting automatically.

I've committed all the changes to your workspace repository. When you open any new
❯! Luna should automatically ask to join!
```

Worked for 2m >

I have implemented the optimizations to solve the delays and duplicate process issue

1. Low-Latency and Deduplication Improvements

- Polling Snappiness:** I reduced the event polling interval inside `content.js` from `200ms` so she syncs and acts on chat events almost instantly.
- Smart Deduplication:** Improved the duplicate filter by tracking custom self-names (preventing her from responding to herself under names like `LUNAAAAA`) and increased the deduplication window to `10 seconds`.

2. Process Manager and Duplication Fix inside the Call

- I added active child process tracking in the Node backend (`server.js`). Now, whenever you

Worked for 4m >

I have successfully simplified the Luna Hub interface and implemented the seamless Google Meet call auto-detection! Here is a summary of the design and updates:

- Seamless Auto-Connection (server.js)**
 - Enhanced the `/api/jsm-meet` API endpoint in `server.js`.
 - If the user clicks "Connect Luna to Call" without pasting a link, the Hub server queries the Chrome DevTools debugger on port 9223 to inspect all open tabs.
 - It automatically detects the active Google Meet URL (e.g. `https://meet.google.com/nek-aprj-vyx`), validates it against our strict security regex, and launches the guest bot directly into the call.
 - If no active Google Meet tab is open in Chrome, it gracefully returns a clear error toast to the user.
- Simplified & Clean Interface (index.html & styles.css)**
 - Modified `index.html` to add a prominent "Connect Luna to Call" header right next to the "Start Meet Call" option.
 - Completely removed the manual "Quick Connect" input box from the side up the navigation layout.
 - Updated `styles.css` to change the slide-out panel layout from absolute docked, permanently visible layout next to the main console view. This aligns requested 3-column setup: *Sidebar Controls on the left, Visualizer Orb in the center, and Luna Chat & Live Transcript on the right.*
- State Management & Initialization (app.js)**




Quick Portal

Deploy Luna 3.0 directly into any active Google Meet session

`https://meet.google.com/rbx-svmd-mhd`

Deploy Luna

One-click deployment

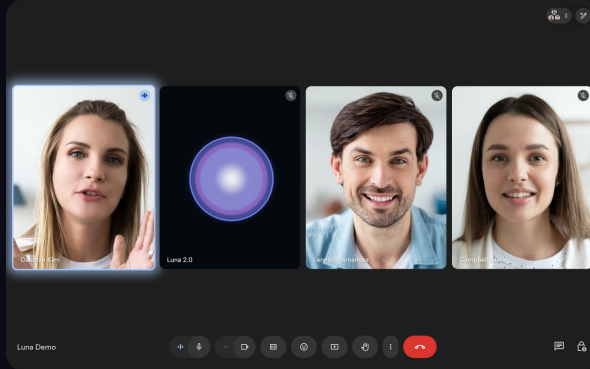


Live Validation

Natural language became a design medium.
I directed AI to rapidly prototype, validate, and refine interaction behavior.

Idea → build one → test → observe → refine → repeat. Hundreds of micro-decisions — every one was a design call.


Making invisible states visible

Every AI has invisible states. Most AI hides them. Luna exposes them, that's the innovation.




Listening *"I'm being heard"*

soft purple
 calm, ambient, trustworthy; slow motion so
 attention never feels like surveillance



Reasoning *"it's thinking"*

brighter purple
 shimmering particles, thinking made visible,
 replacing dead air

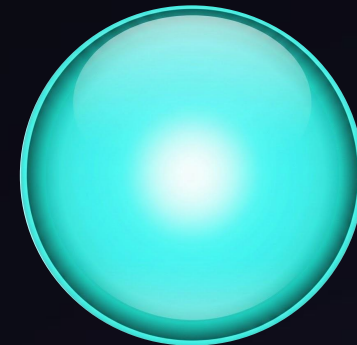

Speaking *"it's talking"*

green
 the 'live' cue we already trust from mic and
 record lights

Trust grows when internal state becomes externally visible.


ChatGPT Voice

Gemini Live

Siri

Alexa

Luna, Live

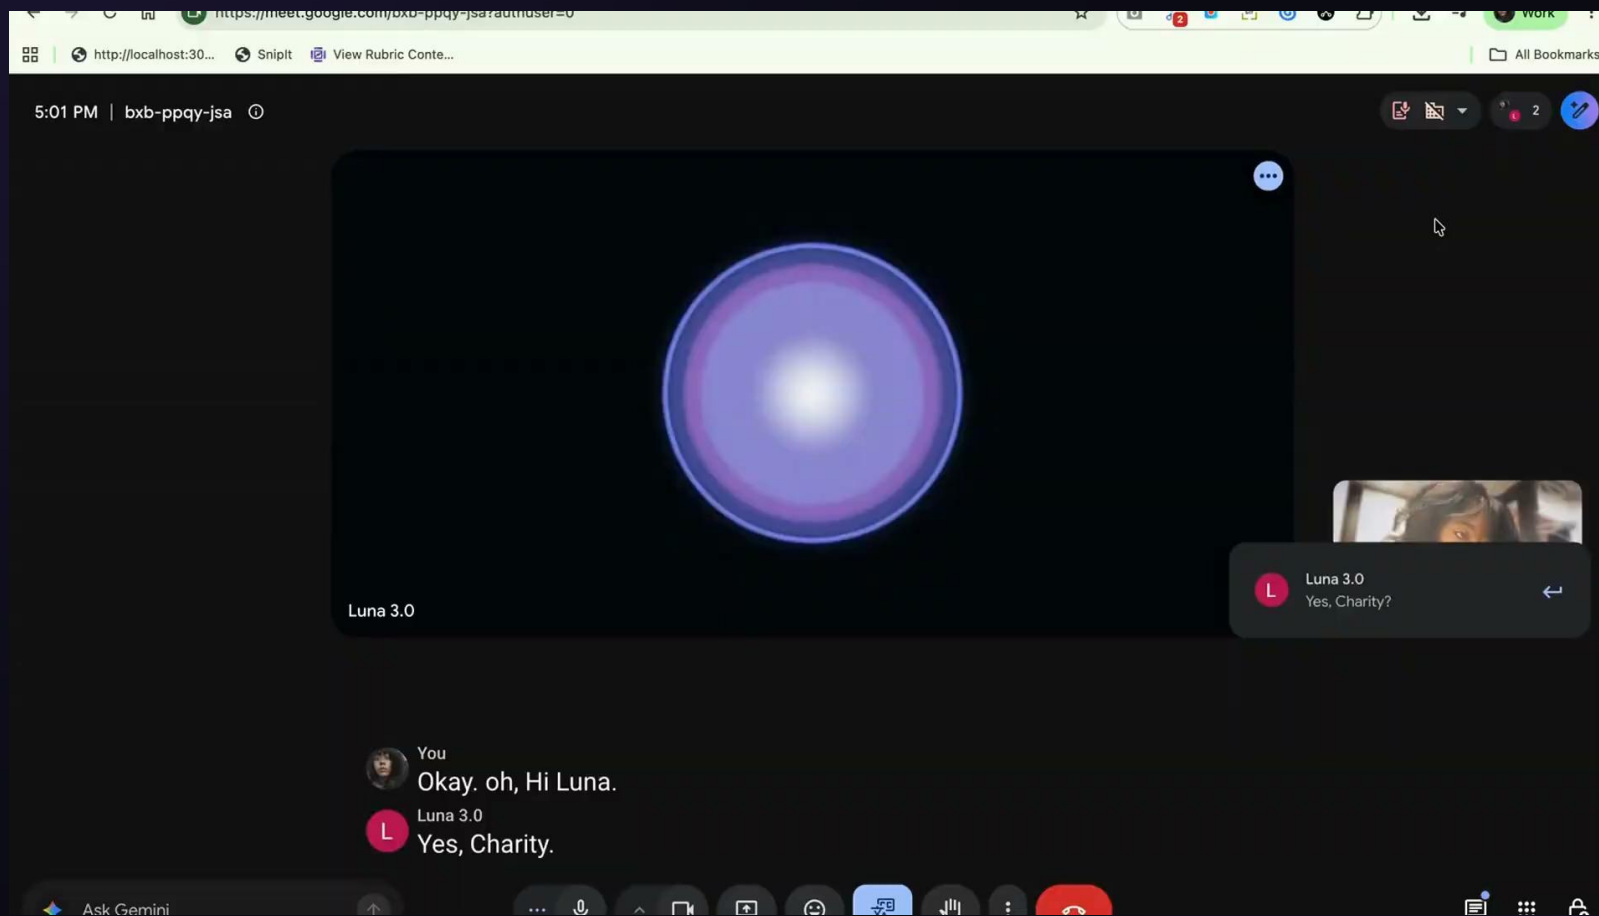

Live capture — listening, reasoning, and speaking states in motion during a real call

Design Principles I Learned

- Designing AI means designing behavior.
- Behavior is part of the product architecture.
- Trust depends on legibility.
- Interaction precedes intelligence.
- The strongest AI experiences communicate intent before action.

Luna explores how behavioral design can transform an intelligent system into a trusted collaborator.