UPDATE function cost under a concurrent reader

Loaded mean − idle mean within each boot; filled = four-boot mean, hollow = boots

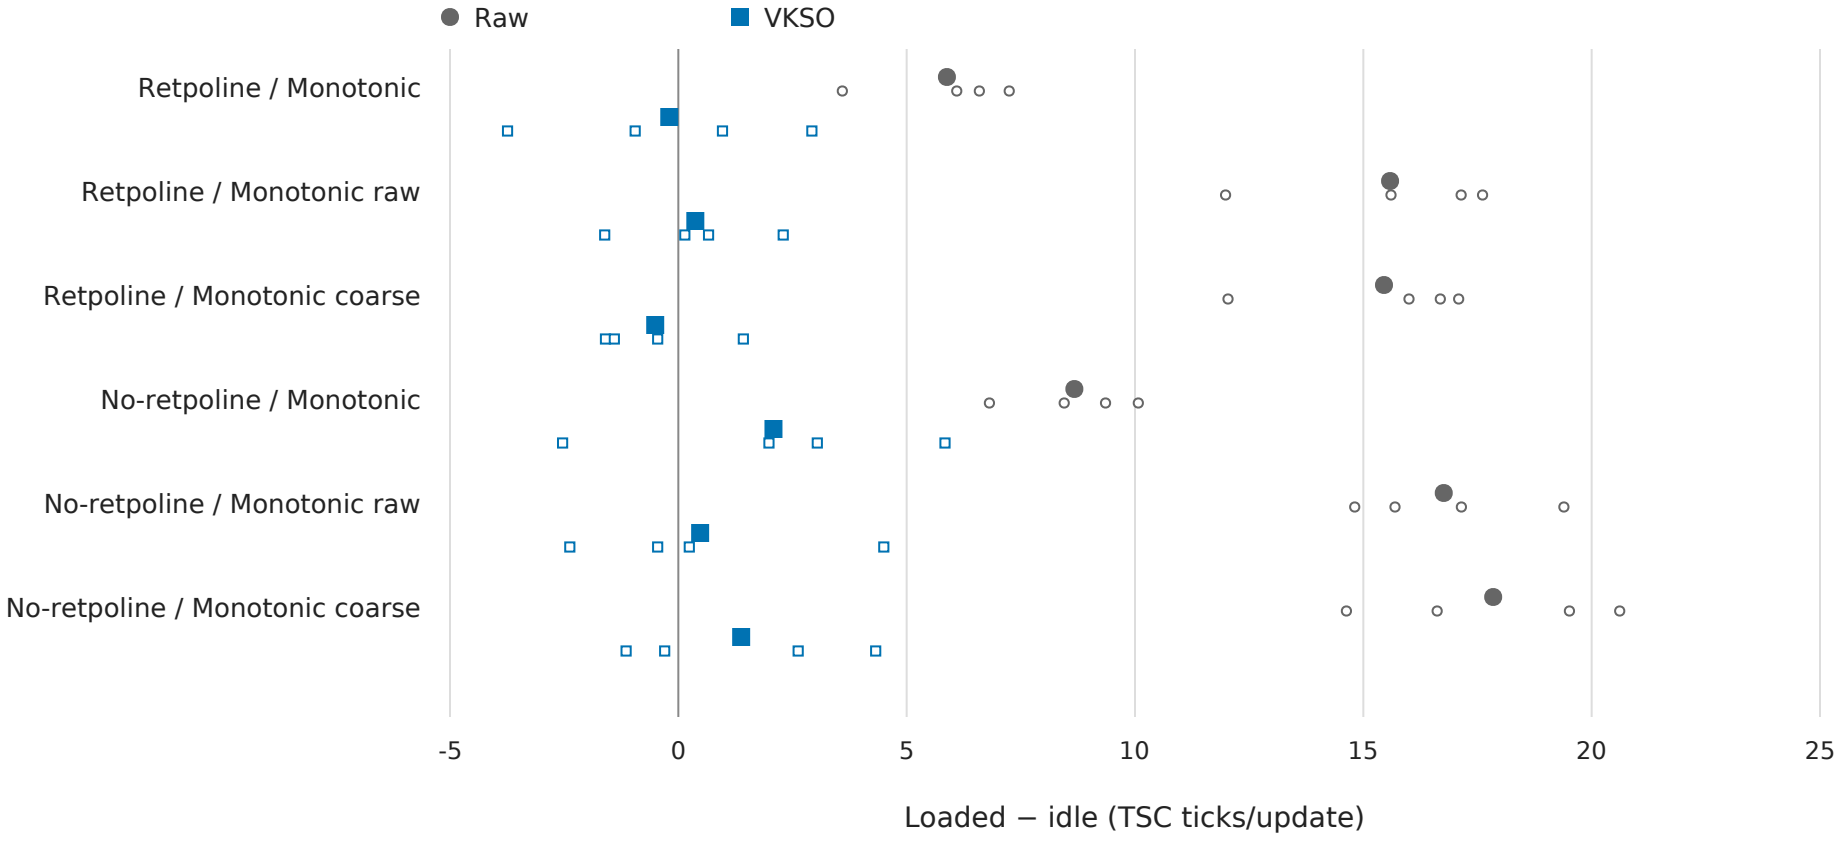

One public API reader on CPU 2; fixed-duration writer windows