

DryDocs web console — SME review wireframe

wf-console-01 · 2026-07-14 · rung 3 (line wireframe — structure only, no theme) · reflects main@f7970e5: O2 shipped (mock sign-in, My Apps), ADR 0005 PROPOSED (thin API), O1 graph view planned · supersedes drydocs-wireframe-print.pdf (2026-07-06)

How to mark this up: every element carries a circled key (e.g. **L4**). Write your note anywhere on the page and prefix it with the key it concerns ("L4: move this above the fold"). Cross out what should go; draw what's missing and give it a new key (L9+, S4+, ...). Scanned/photographed markup goes through the transcribe-doc-markup flow and comes back as keyed feedback YAML — so keys, not arrows, are what survives digitization.

V1 · Landing / overview (implemented — with design-review fixes applied)

L1 DryDocs logo

L2 Overview · Graph Explorer · Lineage · Pipelines · Teams · About

L3 [persona chip + My Apps] / [Sign In]

L4 Hero — name, one-line purpose ("production-support knowledge graph for D&A batch"), buttons: Explore the Graph · Watch Demo

L5 Hero graphic (graph orbit) — decorative only

L6 Feature strip: Knowledge Graph · Pipeline & Job Lineage · Environment Mapping · Team & Access


L7 Explore by Tower — card per tower (name, product count, team count) → V3 drill-down

L8 Coverage stat chips (jobs mapped, apps attributed — from graph counts, not hardcoded)

L3 fixes design-review finding: the signed-in entry point (My Apps) surfaces in the nav — no longer two clicks deep inside one tower. **L8** is NEW (proposed): honest coverage numbers over decorative stats.

Sketch sheet · relates to V1 — Landing (1 of 2)

New elements: continue keys at **L9+** — circle each key on the sketch, reference it in notes date _____ initials _____

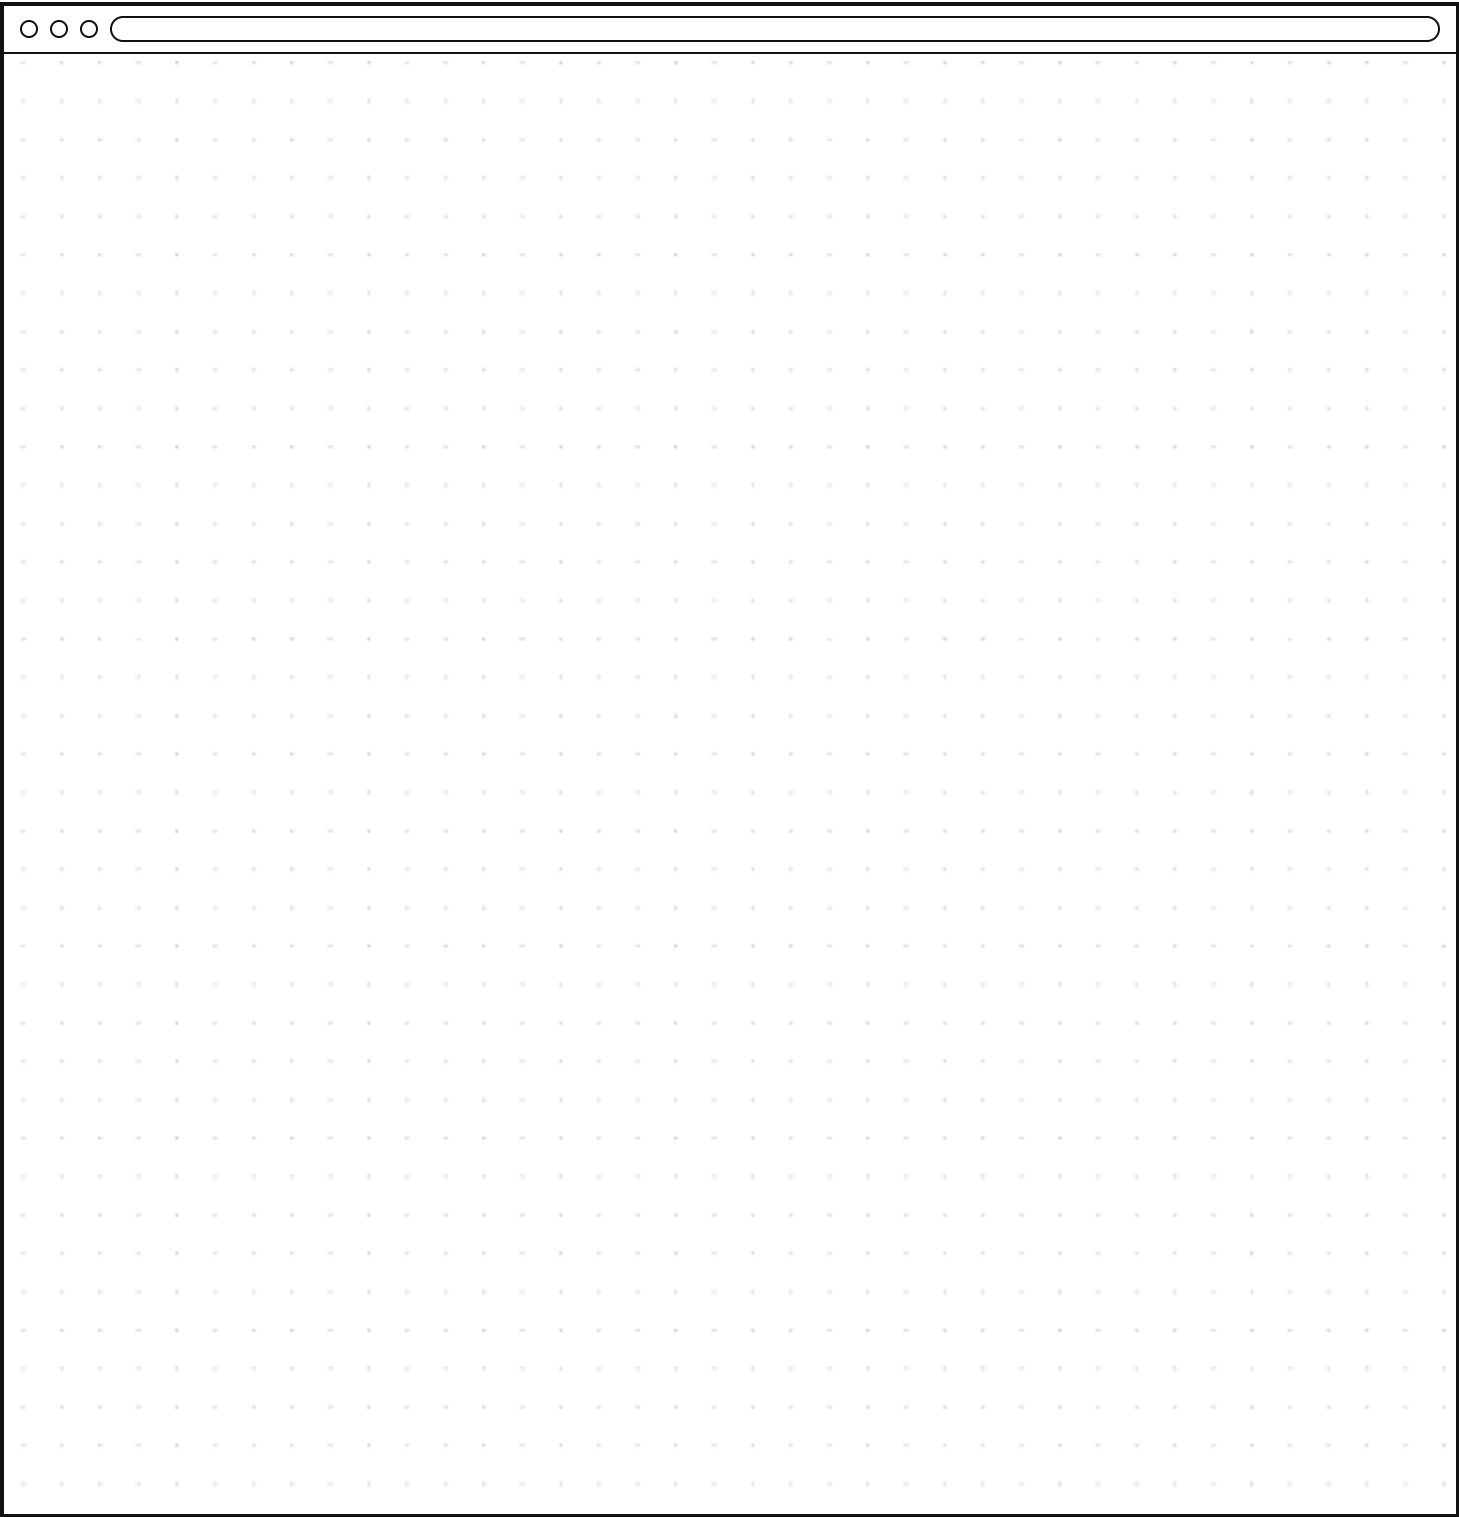

Sketch sheet · relates to V1 — Landing (2 of 2)

New elements: continue keys at **L9+** date _____ initials _____

V2 · Sign-in (implemented as MOCK — replaced at the thin API, ADR 0005)

S1 Persona picker — synthetic personas, role chip ("user: app access derived from ServiceNow" / "admin: all towers")	S2 Session note — localStorage only, no server; role re-derived on every read (untrusted store)
S3 ADR 0005 rider (display to SME, not end users): real authn/authz terminates at the thin API (SSO/OIDC); this whole view is scaffolding until then	

Sketch sheet · relates to V2 — Sign-in (1 of 2)

New elements: continue keys at **S4+** date _____ initials _____

Sketch sheet · relates to V2 — Sign-in (2 of 2)

New elements: continue keys at **S4+** date _____ initials _____

V3 · Tower drill-down (implemented; layout REVISED per design review — graph first)

D1 ← Back to Overview · breadcrumb: Tower > Product	
D2 Graph result (primary, left/top): tower → products → apps → jobs neighborhood; click node → V5 inspector	D3 Products & teams list — product_id-keyed cards; team chips (aligned/flex/dedicated from SUPPORTS edge)
D4 Cypher console — collapsed by default; admin + dev-flag only (was: code-before-payoff for non-engineer SMEs; also K2 gate: raw-Cypher gated)	D5 Unmatched / coverage panel: jobs with no SEAL attribution (the K2 zero-unmatched surfacing — coverage counts, never hidden)

D2 / D4 invert the shipped order (design-review finding). D5 is NEW (proposed): the support view of the K2 coverage invariant.


Sketch sheet · relates to V3 — Tower drill-down (1 of 2)

New elements: continue keys at **D6+** date _____ initials _____

Sketch sheet · relates to V3 — Tower drill-down (2 of 2)

New elements: continue keys at **D6+** date _____ initials _____

V4 · My Apps (implemented — O2)

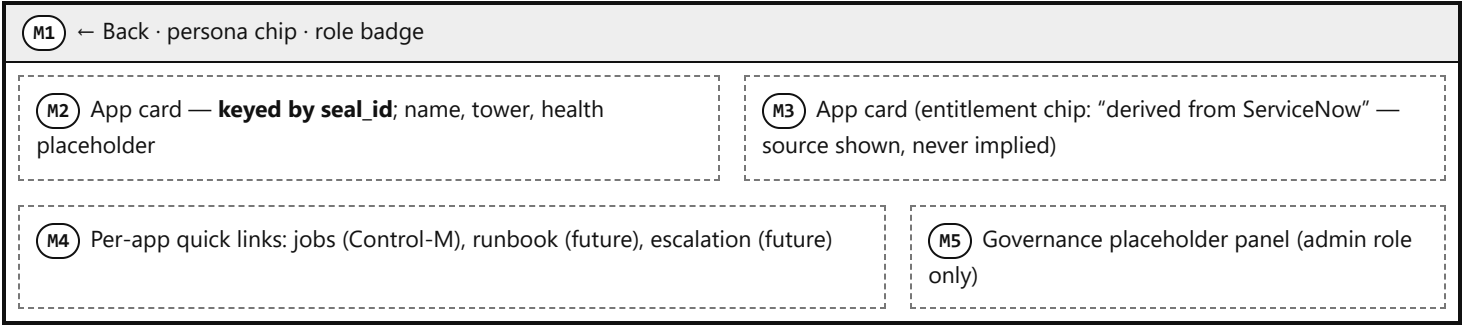

Sketch sheet · relates to V4 — My Apps (1 of 2)

New elements: continue keys at **M6+** date _____ initials _____

Sketch sheet · relates to V4 — My Apps (2 of 2)

New elements: continue keys at **M6+** date _____ initials _____

V5 · Graph explorer / C4 view (O1 — PLANNED, not built; the review target)

G1 Level: [Landscape] [Tower] [Product] [App] [Job] — C4-style zoom ladder G2 DB scope: [drydocs] [drydocs_all] — trust boundary made visible (ADR 0002)	
G3 NVL canvas — nodes colored by label family (Control-M / SEAL / PAT / registry); edge labels on hover; uncertain (drydocs_context) nodes rendered distinct	G4 Node inspector — label, identity key (from the tables below), properties w/ provenance badges (source/derived/manual), “manually_created” flag surfaced, gate/loader lineage
G5 Path/impact strip: upstream/downstream along WAS_INFORMED_BY; critical-path ETA hook (P2 timing props)	G6 Data access: GraphAccess seam — api adapter default, bolt dev-mode (ADR 0005)

Sketch sheet · relates to V5 — Graph explorer (1 of 2)

New elements: continue keys at **G7+** date _____ initials _____

Sketch sheet · relates to V5 — Graph explorer (2 of 2)

New elements: continue keys at **G7+** date _____ initials _____

Neo4j label key — what the console renders, per source domain

Identity keys are the schema's enforced constraints (KEY = composite node key, UNIQ = unique property). Status: active loaded/loadable today · gate-signed policy signed off, loader pending · planned registered, not yet gated · gate-bound change proposed, awaiting SME.

T1 Control-M

Label	Identity key	PROV / W3C type	Status & notes
:ControlMJob	(folder_id, job_id) KEY — source-side now also ctm_id = folder_id.job_id (e.g. 161015.7)	prov:Activity	active ctm_id per the P2 gate edit 2026-07-14
:ControlMFolder	folder_id UNIQ	prov:Collection	active renamed from JobFolder (ADR 0003)
:ControlMApplication	name UNIQ	prov:Collection	active BMC grouping field — NOT the SEAL :Application
:ControlMServer	name UNIQ	local platform (not Agent)	active
:Condition	(folder_id, name) KEY	prov:Entity	active
:JobRun	run_id UNIQ	prov:Activity	active loader provenance — distinct from ControlMJobRun
:ControlMHostGroup	(data_center, name) — per gate spec	prov:Collection	gate-signed 2026-07-09; loader = Epic P3
:ExecutionHost	nodeid — per gate spec	prov:SoftwareAgent	gate-signed job→host is polymorphic: group match wins (2-hop), else direct (1-hop)
:ControlMJobRun / :Script / :ETLProcess / :AppUser	—	Activity / Entity / Activity / SoftwareAgent	planned phase 2

T2 SEAL

Label	Identity key	PROV / W3C type	Status & notes
:Application	seal_id UNIQ	prov:SoftwareAgent (today)	active two gate-bound changes ride K4: label → :BusinessApplication, class → prov:Entity / dprod:DataProduct — the K2 attribution edge RE-SHAPES then
:Employee	employee_id UNIQ	prov:Agent	active
:Port	(parent_seal_id, kind) KEY	dprod:Port	active
:Membership / :Role	membership_id / role_id UNIQ	org:Membership / org:Role	active SEAL use deprecates at K4 (org: stays for PAT); replaced by the pattern below
:Attribution + :TOMRole	— (TOMRole = skos concept per role)	prov:Attribution / skos:Concept	gate-bound K3-decided role families: TOM contacts on the app (App Owner, Primary/Backup Info Owner, CTO, Tech Risk & Controls, Design Authority, Operate Mgr L1/L2); Product Cabinet is K5, on PAT scope
:Document	doc_id UNIQ	prov:Entity	gate-bound SEAL source-doc provenance (hadPrimarySource)

T3 PAT / catalog

Label	Identity key	PROV / W3C type	Status & notes
:BusinessSegment	code UNIQ	org:FormalOrganization	active
:CatalogLOB	lob_id UNIQ	org:OrganizationalUnit	active

:ProductLine	product_line_id UNIQ	dd:ProductLine	active
:Product	product_id UNIQ	dd:Product	active the console “tower > product” ladder reads this chain
:AreaProduct	area_product_id UNIQ	dd:AreaProduct	active Product → AreaProduct → DevTeam
:DevTeam	team_id UNIQ	org:OrganizationalUnit	active SUPPORTS {team_type: aligned flex dedicated} edges to Product/AreaProduct
:JiraBoard	board_id UNIQ	dd:JiraBoard	active

T4 How the three domains JOIN (what the console navigates on)

Edge	Join keys	Status
(:ControlMJob)-[:WAS_ASSOCIATED_WITH {role: seal_app_ref}]->(:Application)	(folder_id, job_id) → seal_id, derived from STG_APP_FACT tiers SEAL>FID>APP_NAME>ALIAS, tier-5 manual CSV pins	gate-signed K2 2026-07-14; loader = K2 build; shape re-opens at K4
SEAL ↔ PAT: app sits under Product hierarchy	seal_id → product_id (PAT alignment)	active
(:ControlMJob)-[:RUNS_ON]-> group or host	NODE_ID → (data_center, name) group else nodeid; group match wins	gate-signed hosts-topology; loader = P3
Standing warning (ADR 0003): :ControlMApplication (BMC grouping, name-keyed) is never a join path to :Application (SEAL, seal_id-keyed) — the console must not visually conflate them.		

SME notes (also usable for anything without a key)

Sketch sheet · free — any view or a new one (1 of 2)

Name the view; new views take keys **N1+** view _____ date _____ initials _____

Name the view; new views take keys **N1+** view _____ date _____ initials _____

Name the view; new views take keys **N1+** view _____ date _____ initials _____

Name the view; new views take keys **N1+** view _____ date _____ initials _____

This image shows a full page of graph paper. At the top left, there are three small circles followed by a horizontal line with rounded ends. The rest of the page is covered by a uniform grid of small dots, forming a coordinate plane. The grid consists of 20 columns and 20 rows of dots.

Sketch sheet · free — any view or a new one (2 of 2)

Name the view; new views take keys **N1+** view _____ date _____ initials _____

Provenance: labels/types from knowledge/ontology/NODE_QUICK_REFERENCE.md (2026-07-09) + gate-log through 2026-07-14; identity keys from drydocs_core/schema constraints; gate-signed keys from their gate specs. Mechanism only — no real names/ids. classification: Internal-Public.