React has `useState`.
A React Native Developer has two states:

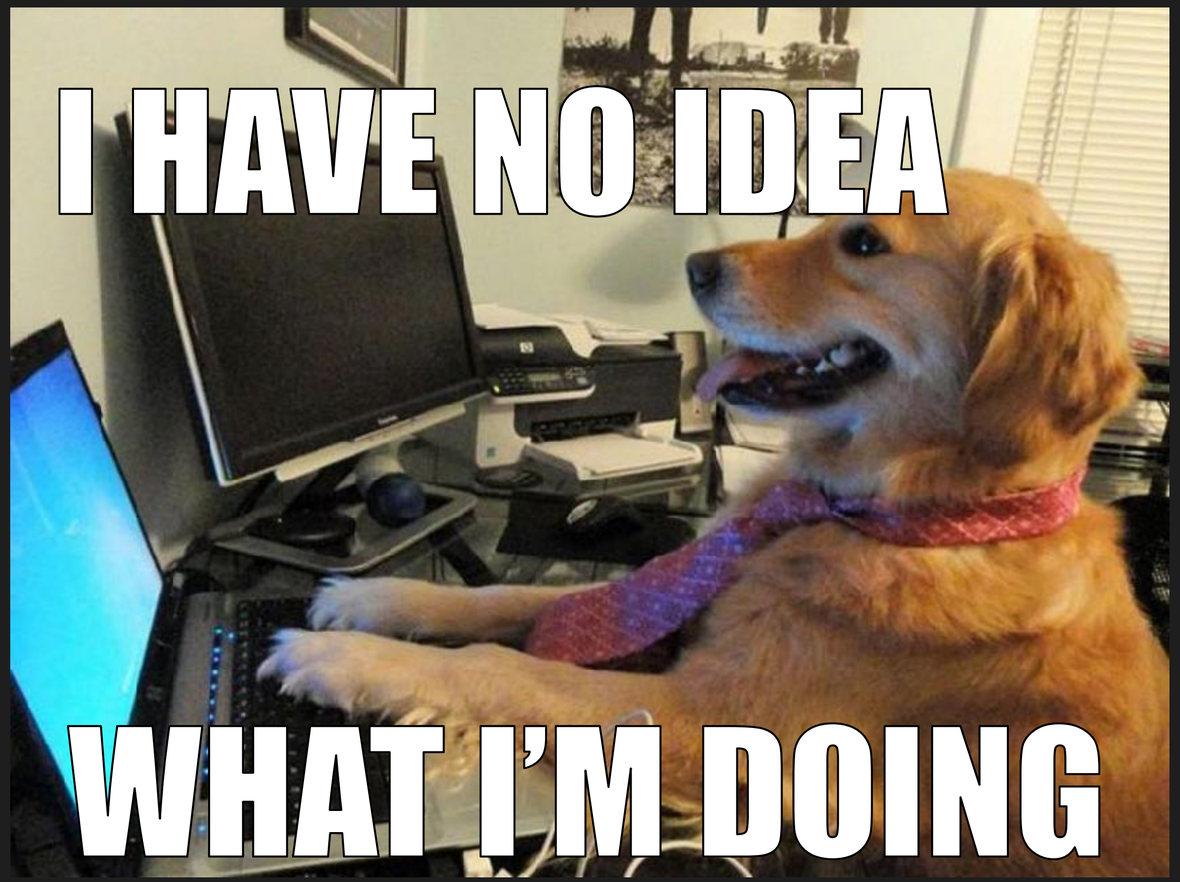

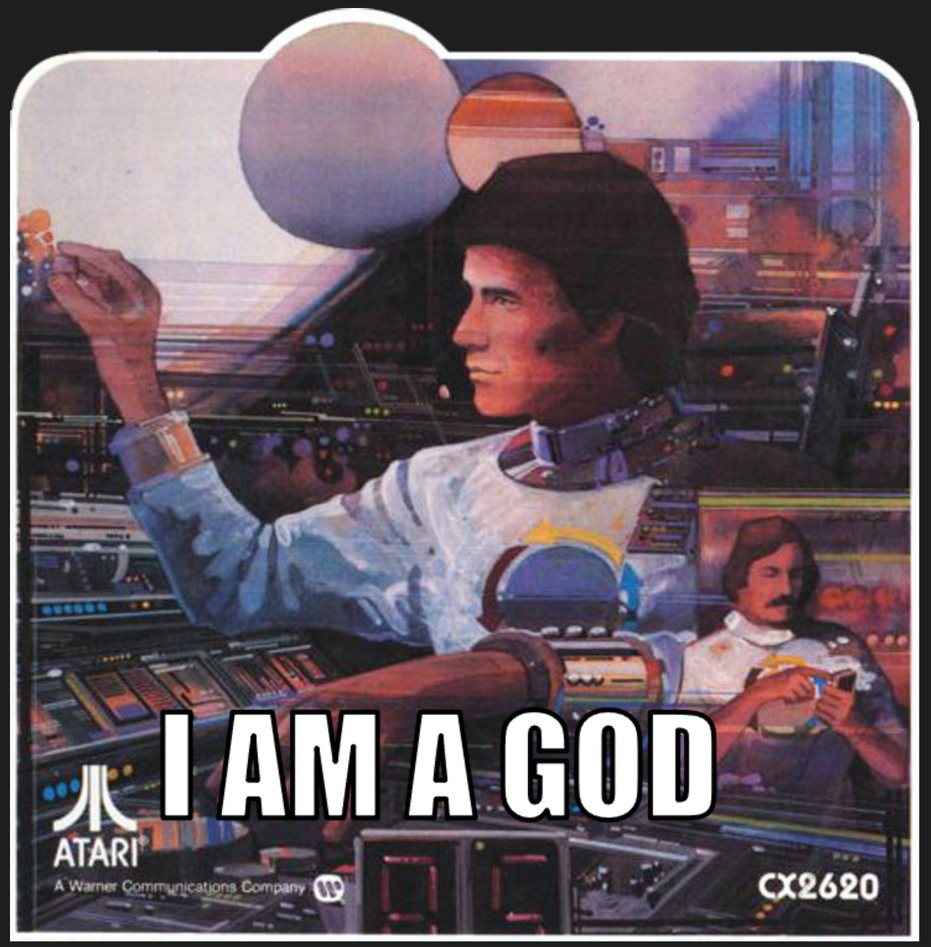


Firebase

1. Introduction to Firebase
2. Client Server
3. CRUD & REST
4. Realtime Database REST API
5. Setup Firebase
6. Post App Part 5: Firebase and CRUD

When someone asks you how to get data from a database in a js code

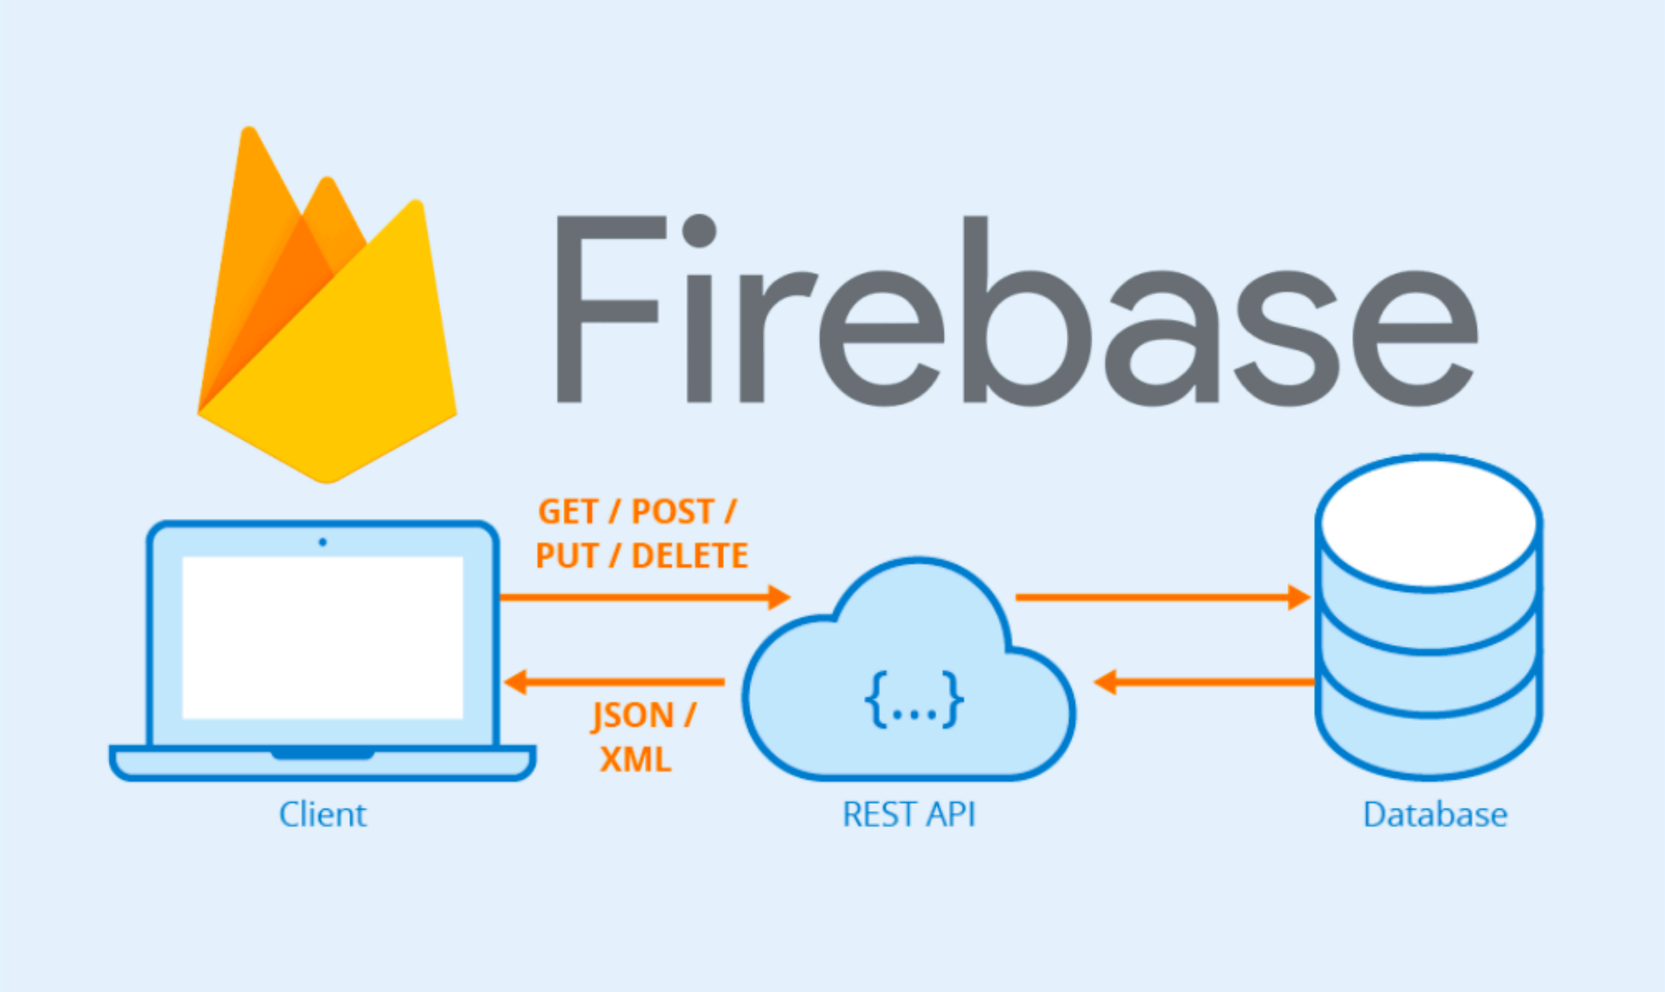

javascript.plainenglish.io/firebase-cloud-functions-tutorial-creating-a-rest-api-8cbc51479f80

What is Firebase?

Platform, a suite of tools & Backend-as-a-Service
for Web & App Development

100 SECONDS OF

https://www.youtube.com/watch?v=vAoB4VbhRzM

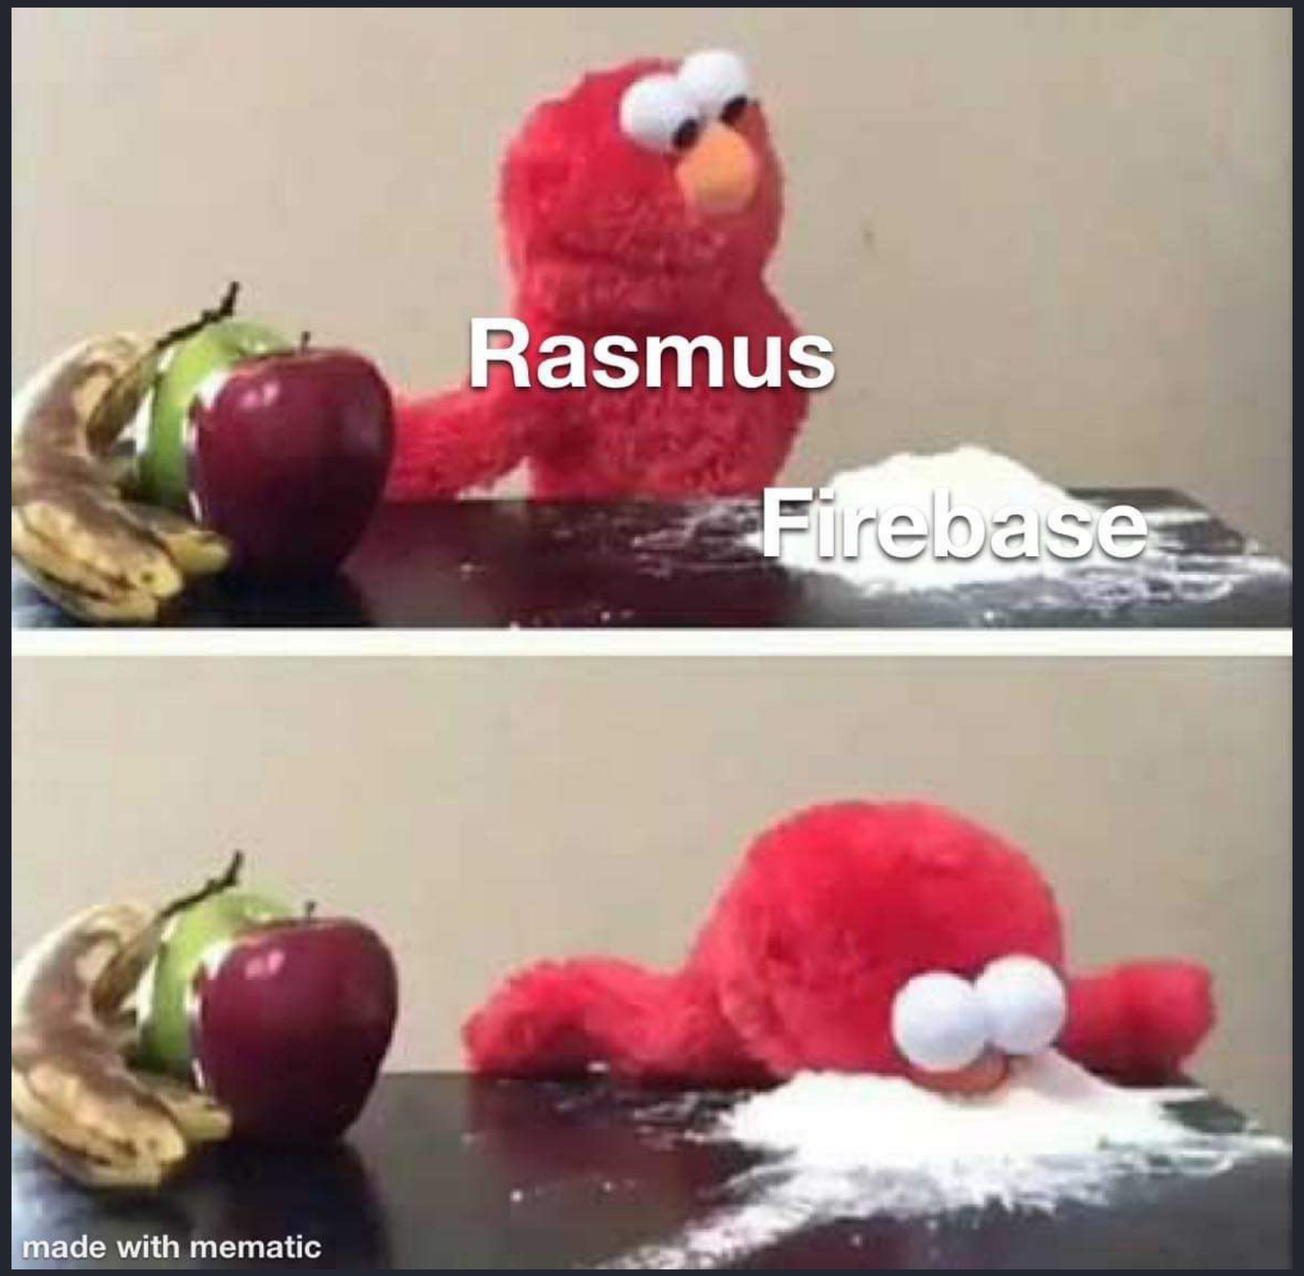
Rasmus
Firebase
made with mematic

Introducing Firebase

https://www.youtube.com/watch?v=iosNuIdQoy8

Build better apps

Cloud Firestore
Store and sync app data at global scale

ML Kit BETA
Machine learning for mobile developers

Cloud Functions
Run mobile backend code without managing servers

Authentication
Authenticate users simply and securely

Hosting
Deliver web app assets with speed and security

Cloud Storage
Store and serve files at Google scale

Realtime Database
Store and sync app data in milliseconds

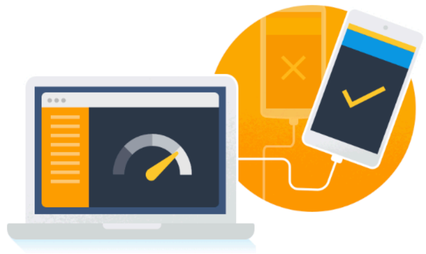

Improve app quality

Crashlytics
Prioritize and fix issues with powerful, realtime crash reporting

Performance Monitoring
Gain insight into your app's performance

Test Lab
Test your app on devices hosted by Google

App Distribution BETA
Distribute pre-release versions of your app to your trusted testers

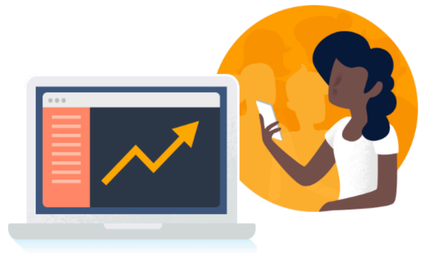

Grow your business

In-App Messaging BETA
Engage active app users with contextual messages

Google Analytics
Get free and unlimited app analytics

Predictions
Smart user segmentation based on predicted behavior

A/B Testing BETA
Optimize your app experience through experimentation

Cloud Messaging
Send targeted messages and notifications

Remote Config
Modify your app without deploying a new version

Dynamic Links
Drive growth by using deep links with attribution

MANY DEVICES
ONE PLATFORM

Do we need Backend Developers?

Client Server

The Basic Architecture of the Web

Client-Server Model

Communication between web **clients** and web **servers**.

CLIENT

SERVER

Client-Server Model

Communication between web **clients** and web **servers**.

Client-Server Model

Communication between web **clients** and web **servers**.

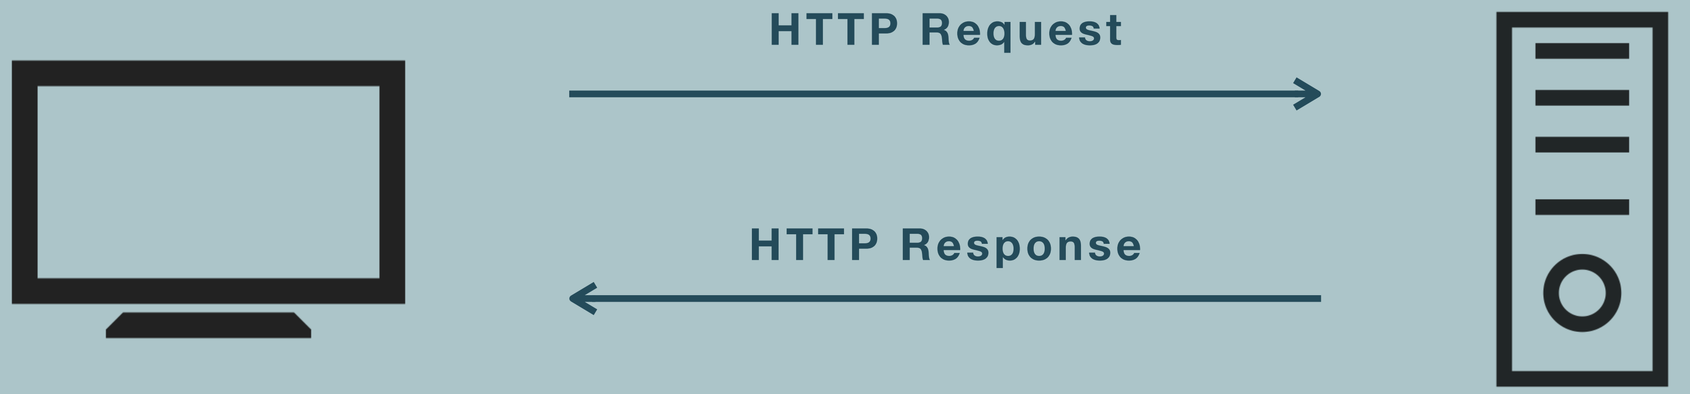

Client Server Architecture

APP

REST API

DATA SOURCE

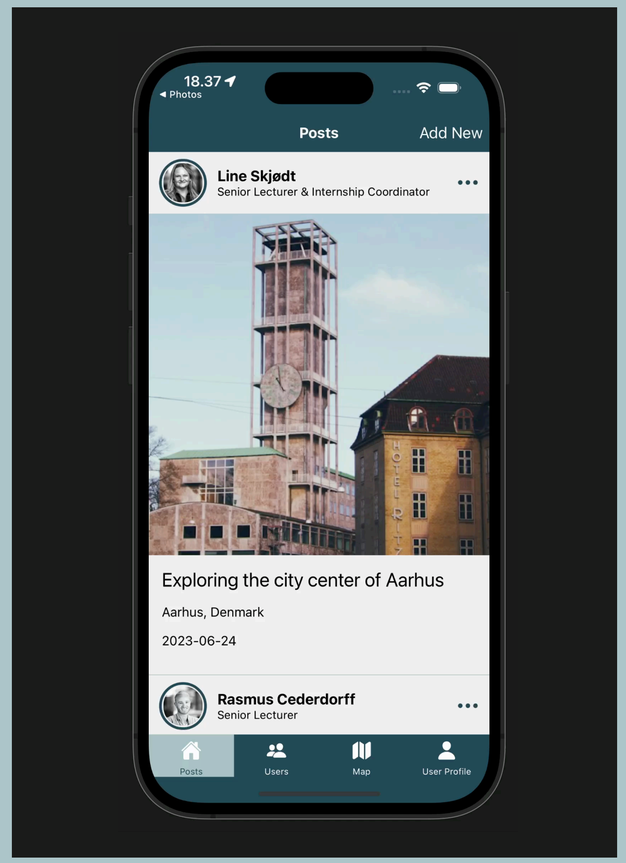

FETCH(GET, POST, PUT, DELETE)

REQUEST

JSON DATA

RESPONSE

JSON

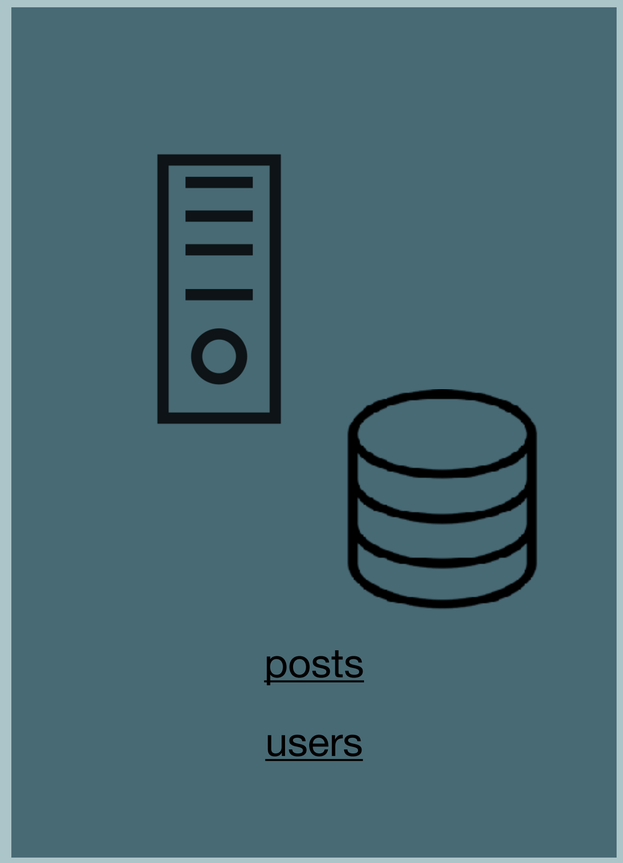

CLIENT

SERVER

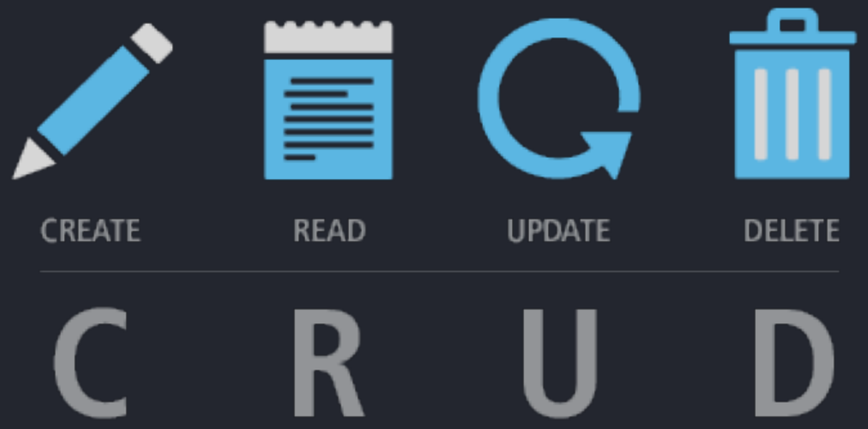

What's CRUD?

- CREATE objects like a post, user, movie, product, etc.
- READ objects like an array (or object) of objects (posts, users, movies, products, etc)
- UPDATE an object, often given by a unique id.
- DELETE an object, often given by a unique id.

codecademy.com/article/what-is-crud

GET

POST

PUT

DELETE

What’s REST?

- REpresentational State Transfer
- A standard for systems (client & server) to communicate over HTTP to retrieve or modify (data) resources.
- Stateless, meaning the two systems don’t need to know anything about the state.
- The client makes the requests using the 4 basic HTTP verbs to define the operation.

codecademy.com/article/what-is-rest

REST API Design & CRUD

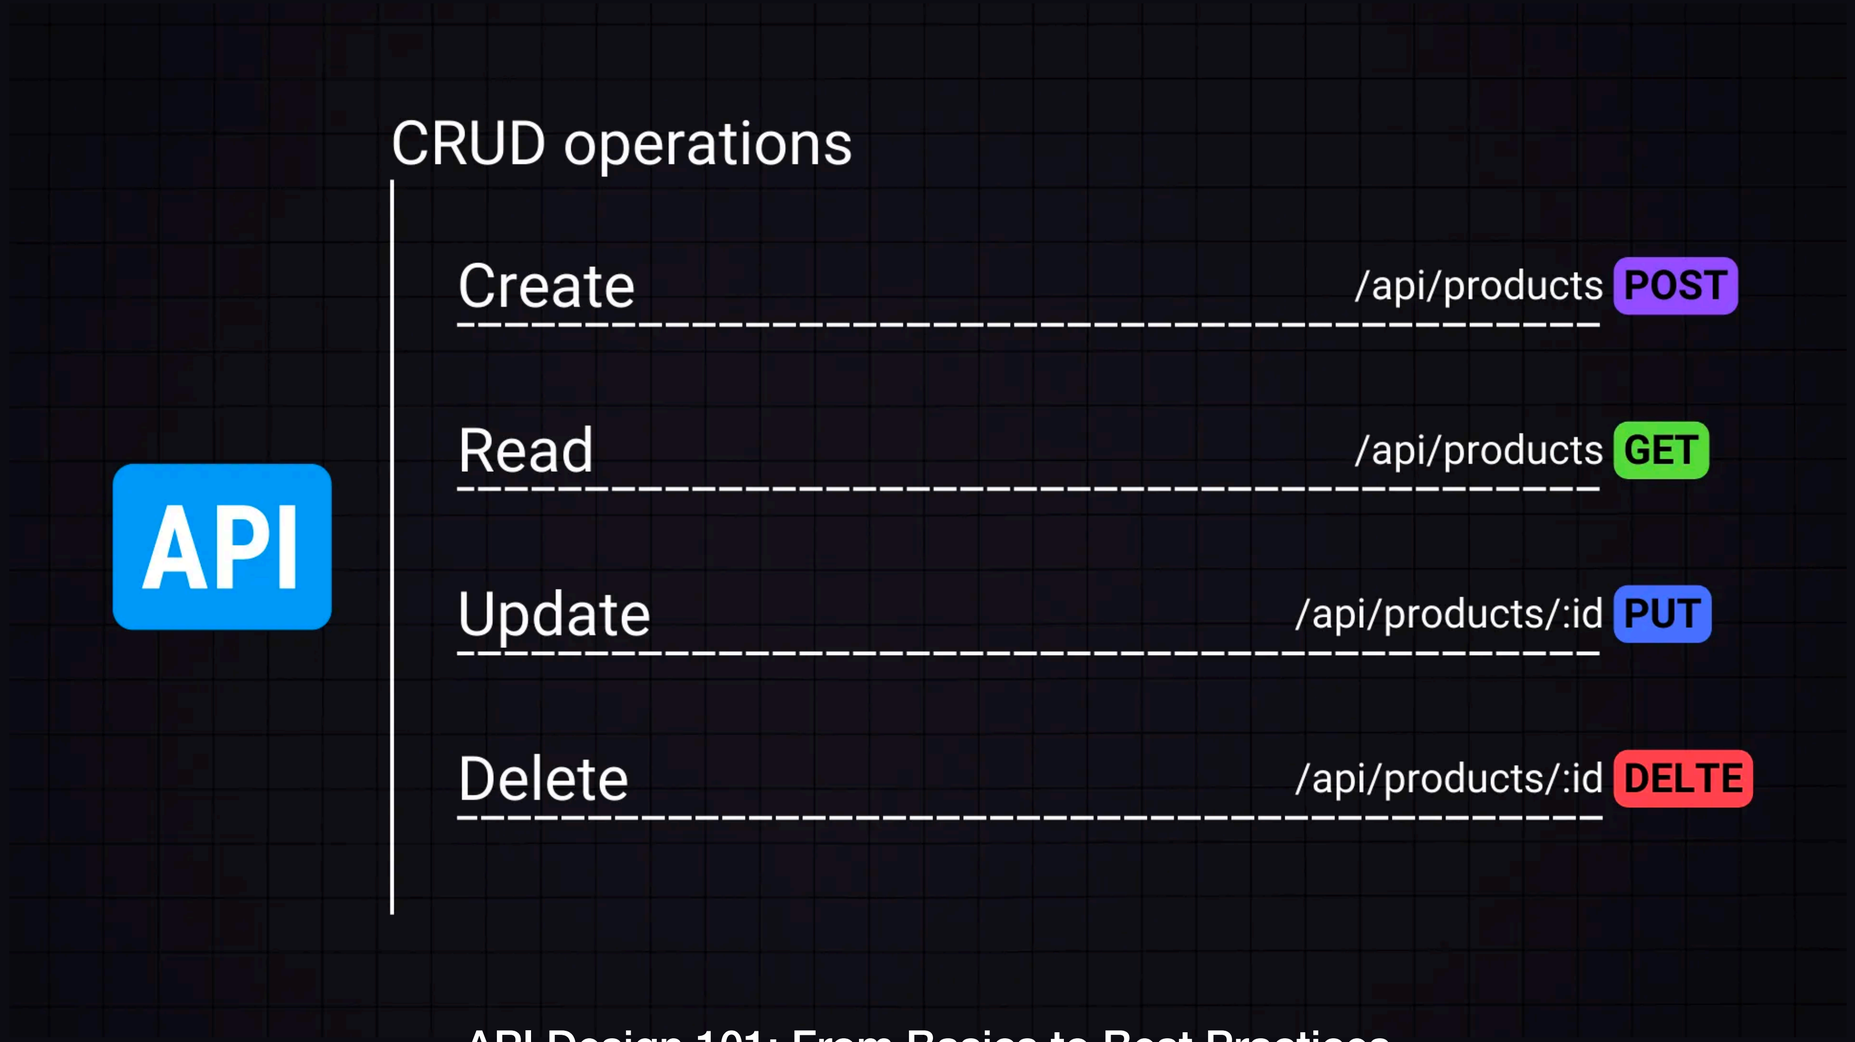

API Design 101: From Basics to Best Practices


100 SECONDS OF node
GET
REST
APIs
I'M A TEAPOT
418

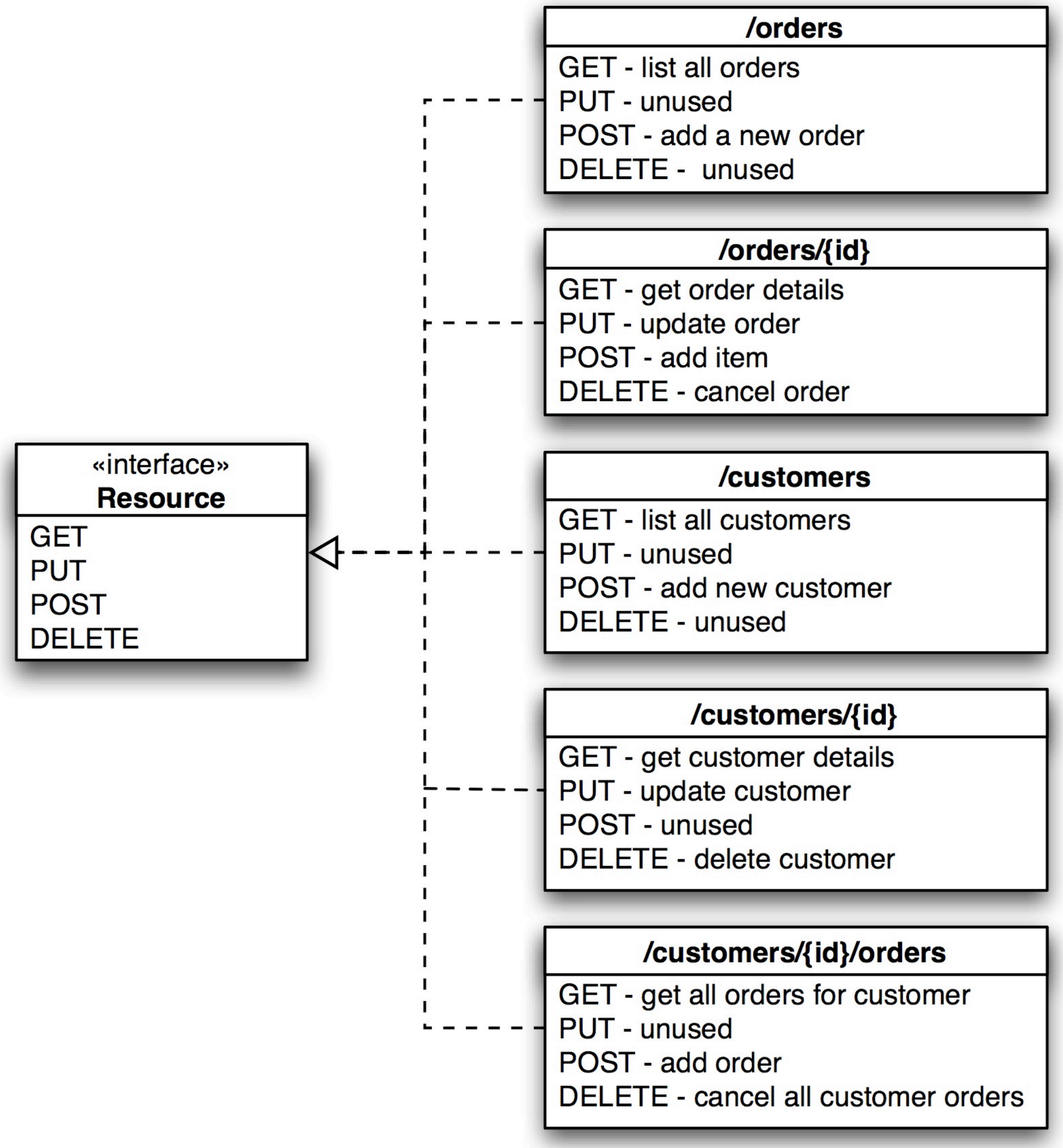

Principles of REST

- REST defines a set of rules and guidelines on how you can interact with an API:
  - With REST, each piece of data in the database is treated as a resource. It has a unique id and URL. The URL structure represents the hierarchy of the data, allowing you to access specific data nodes.
  - You can use standard HTTP methods like GET, PUT, POST, PATCH, and DELETE to read, write, update, or delete that data.
  - REST promotes stateless communication, meaning that each request contains everything the server needs to process it.
  - The data exchanged with the API is typically in JSON format.

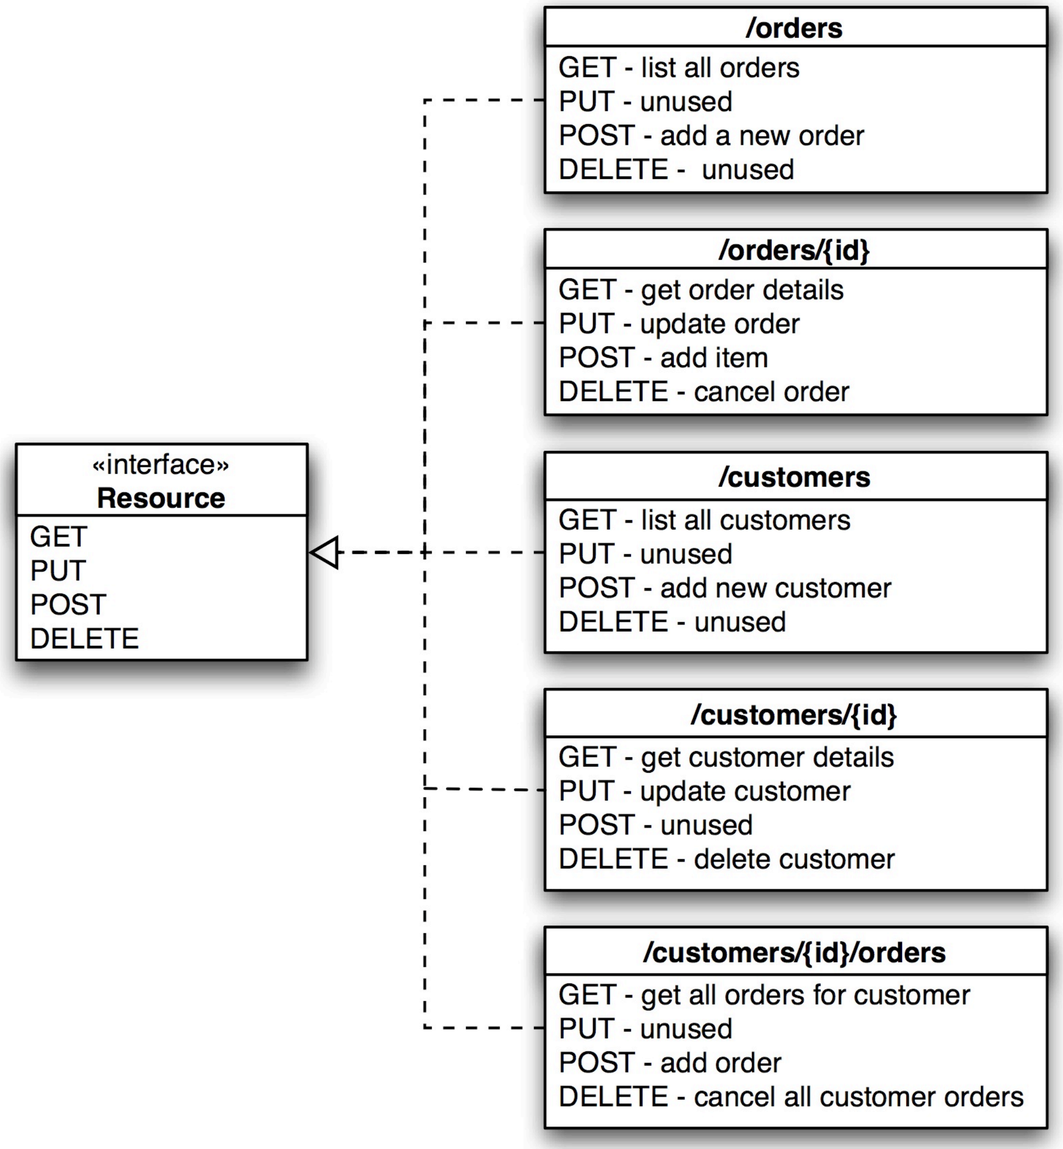

Principles of REST

1. **Resource identification**: Each piece of data in the Firebase Realtime Database is treated as a resource and is identified by a unique URL (Uniform Resource Locator). The URL structure represents the hierarchy of the data, allowing you to access specific data nodes.
2. **HTTP methods**: RESTful APIs utilize standard HTTP methods to perform operations on resources. The Firebase Realtime Database REST API supports the following methods:
    1. GET: Retrieves data from the specified endpoint.
    2. PUT: Replaces or updates data at the specified endpoint.
    3. POST: Appends data to a specified endpoint, generating a unique key.
    4. PATCH: Updates specific fields in the data at the specified endpoint.
    5. DELETE: Removes data at the specified endpoint.
3. **Stateless communication**: Each request sent to the Firebase Realtime Database REST API contains all the necessary information for the server to process it. The API does not maintain any session or state information between requests. This statelessness allows for scalability and simplicity.
4. **Data format**: The data exchanged with the Firebase Realtime Database REST API is typically in JSON format. JSON provides a lightweight and flexible way to represent structured data.

RESTful API

- Base URL: http://some-url.com/products

- http://some-url.com/products/product1

- Data type —> JSON

Ressource	GET	POST	PUT	DELETE
Collection: http://some-url.com/products	Returns a list with all products	Creates new product, added to the collections	Replaces a collection with a another	Deletes all products
Element: http://some-url.com/products/product1	Returns a specific product	÷	Replaces product with new (updated) data	Deletes product

HTTP REQUEST METHODS (verbs)

GET - POST - PUT - DELETE

HTTP (Hypertext Transfer Protocol) is the standard way to communicate between clients and servers (request-response protocol).

"HTTP defines a set of **request methods** to indicate the desired action to be performed for a given resource."

https://www.w3schools.com/tags/ref_httpmethods.asp
https://developer.mozilla.org/en-US/docs/Web/HTTP/Methods

CRUD vs REST & HTTP Verbs

CREATE —> `POST`: create a new resource (object)

READ —> `GET`: retrieve a specific resource or a collection

UPDATE —> `PUT/PATCH`: update a specific resource (by id)

DELETE —> `DELETE`: remove a specific resource by id

codecademy.com/article/what-is-rest

HTTP Request & Response

FRONTEND

REST API

BACKEND

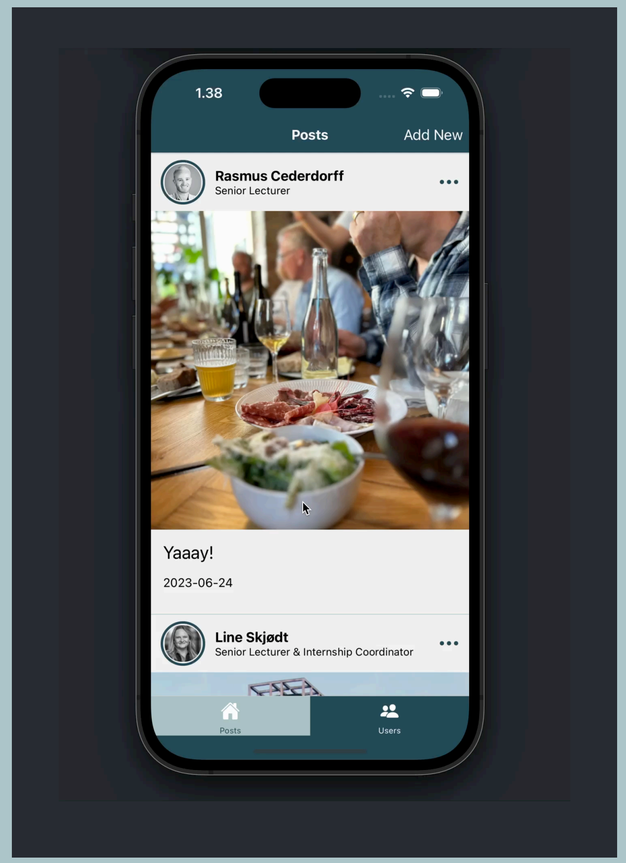

FETCH(GET, POST, PUT, DELETE)

REQUEST

JSON DATA {...}

RESPONSE

CLIENT

SERVER

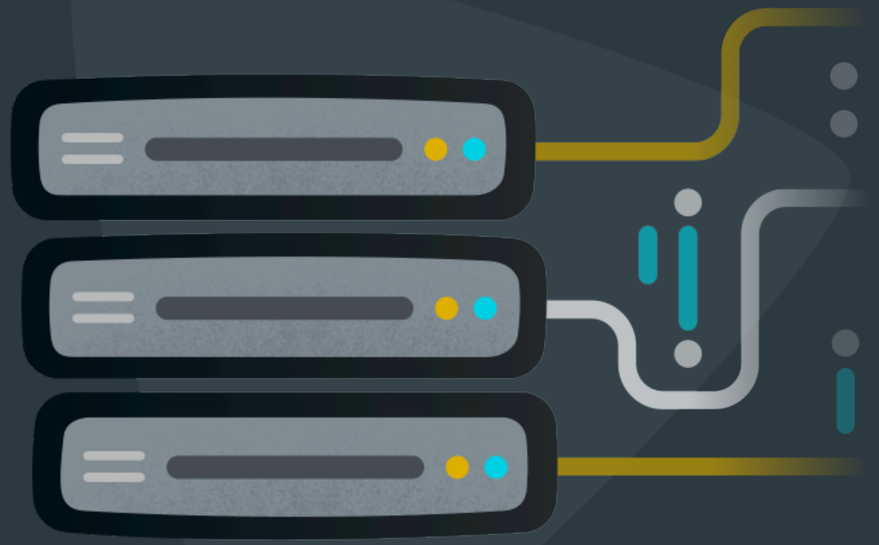

Realtime Database & REST API

Store and sync data in real time

REST API or SDK

https://firebase.google.com/products/realtime-database

Realtime Database REST API

https://firebase.google.com/docs/database/rest/start

```
export default function PostsPage() {
    const [posts, setPosts] = useState([]);
    const [showLoader, dismissLoader] = useIonLoading();

    async function getPosts() {
        const response = await fetch("https://race-rest-default-rtdb.firebaseio.com/posts.json");
        const data = await response.json();
        // map object into an array with objects
        const postsArray = Object.keys(data).map(key => ({ id: key, ...data[key] }));
        return postsArray;
    }

    async function getUsers() {
        const response = await fetch("https://race-rest-default-rtdb.firebaseio.com/users.json");
        const data = await response.json();
        // mapp object into an array with objects
        const users = Object.keys(data).map(key => ({ id: key, ...data[key] }));
        return users;
    }
```

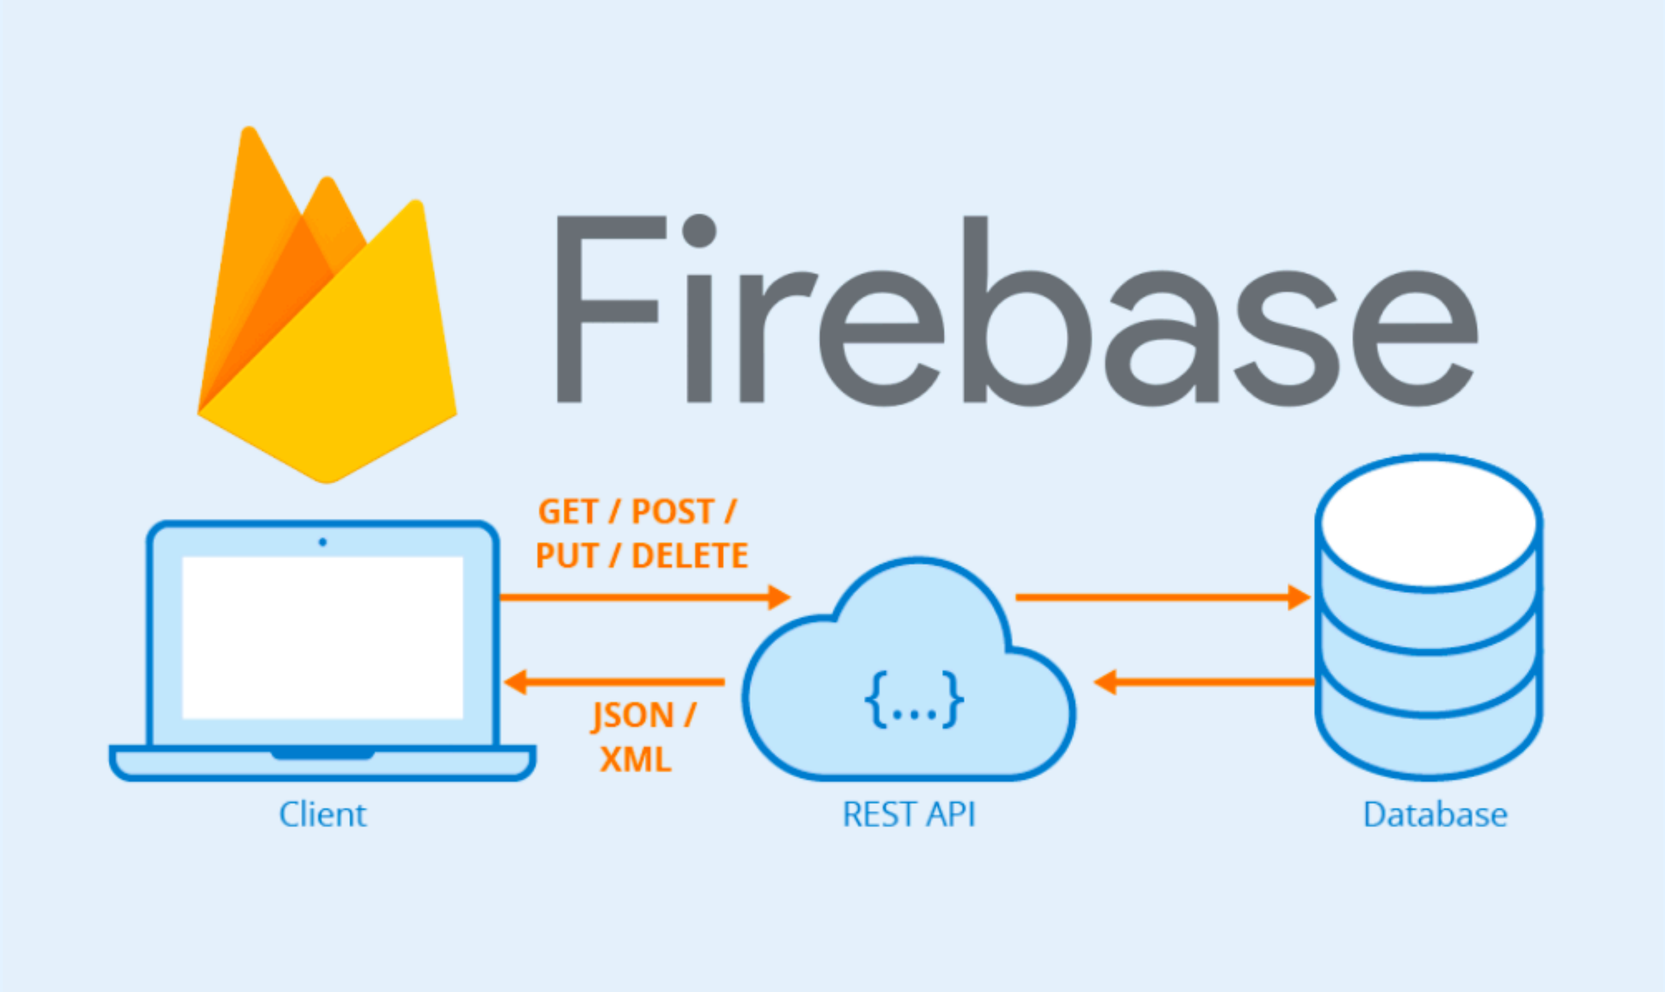

javascript.plainenglish.io/firebase-cloud-functions-tutorial-creating-a-rest-api-8cbc51479f80

“

The Firebase Realtime Database is a cloud-hosted database. Data is stored as JSON and synchronized in realtime to every connected client.

We can use any Firebase Realtime Database URL as a REST endpoint. All we need to do is append .json to the end of the URL and send a request from our favorite HTTPS client.

”

https://firebase.google.com/docs/database/rest/start

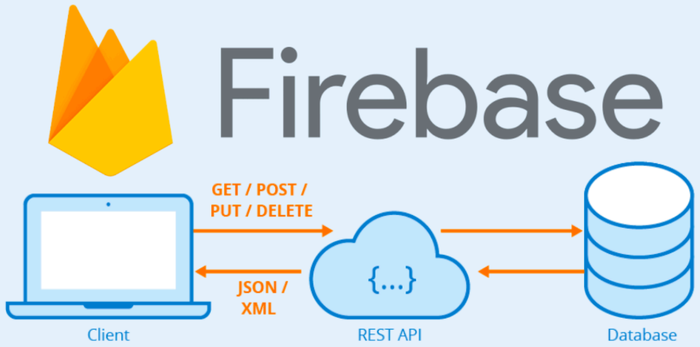

By following these REST principles, the Firebase Realtime Database REST API provides a simple and consistent way to work with the database. It allows developers to perform common operations using familiar HTTP methods, making it easier to integrate and interact with the database from different programming languages or platforms.

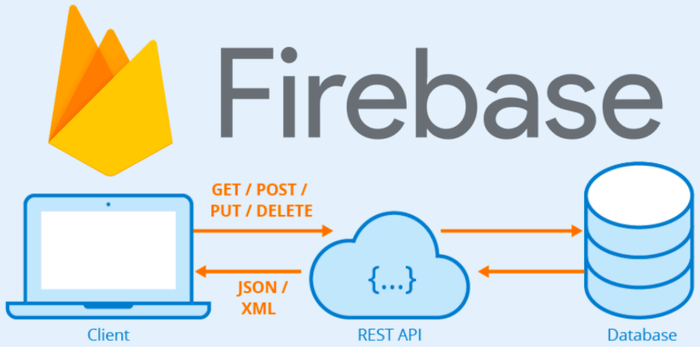

In the context of Firebase Realtime Database REST API, you can perform CRUD operations using HTTP methods like POST, GET, PUT, PATCH, and DELETE to create, read, update, and delete data in the Firebase Realtime Database. This allows you to interact with the database and manipulate data effectively based on your application's needs.

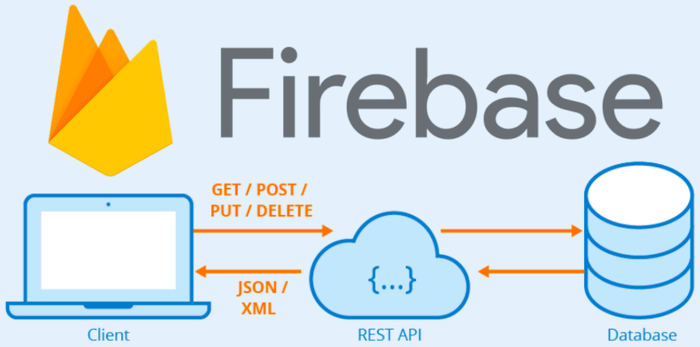

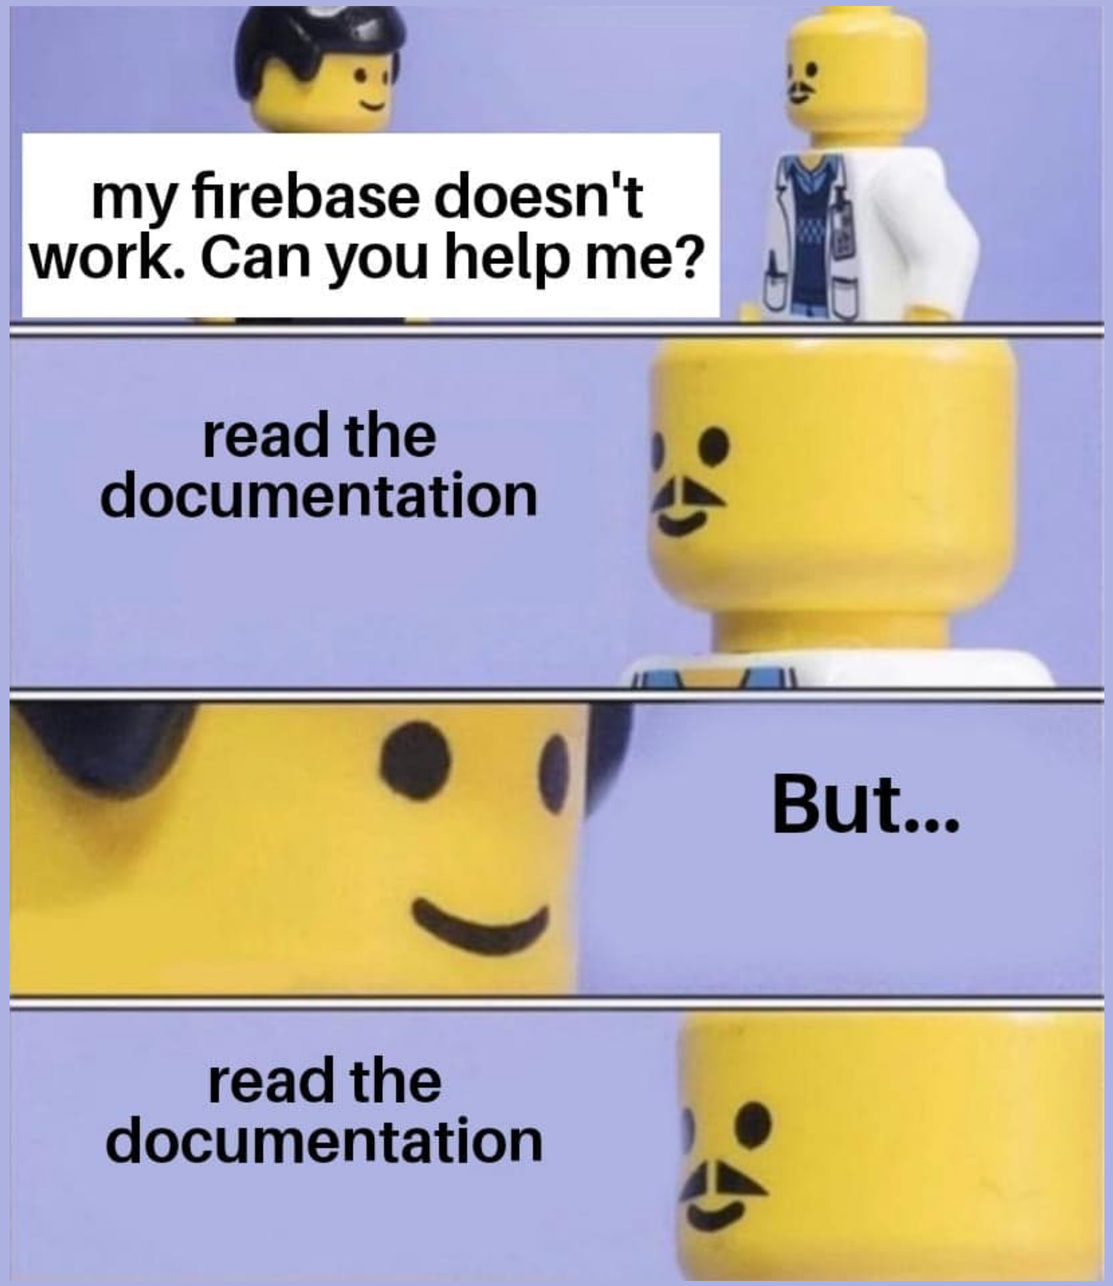
my firebase doesn't work. Can you help me?
read the documentation
But...
read the documentation

How data is structured


```
{
    "posts": {
        "00": {
            "title": "I simply love loops.js 💫",
            "image": "https://images.unsplash.com/photo-1465
        },
        "01": {
            "title": "Slow Mornings in Bed ☕",
            "image": "https://images.unsplash.com/photo-1642
        },
        "02": {
            "title": "Every Day is Flower Day 🌷",
            "image": "https://images.unsplash.com/photo-1642
        }
    }
}
```

- One big object with objects.
- All objects have a unique key
- “posts”, “00”, “01” and “02” are all keys.
- “posts” is the key of the collection of post objects (list of posts).
- “00”, “01” and “02” are keys of a post object.
- “title” and “image” are keys inside of every post object. “title” and “image” contains values.
- Remember a property contains a key and a value.


```
{
    "posts": {
        "00": {
            "title": "I simply love loops.js 💫",
            "image": "https://images.unsplash.com/photo-1465
        },
        "01": {
            "title": "Slow Mornings in Bed ☕",
            "image": "https://images.unsplash.com/photo-1642
        },
        "02": {
            "title": "Every Day is Flower Day 🌷",
            "image": "https://images.unsplash.com/photo-1642
        }
    }
}
```

- Just think of an array of objects (posts array with post objects).
- We are just using an object to hold all the objects instead of an array.
- It’s kind of a dictionary. The posts object contains unique prop names (keys) which easily can be “looked up”.
- Then every post object (with title and image props) can be returned:
  - `[“posts”][“02”]`
  - `[“posts”][“00”]`
  - `[“posts”][“01”]`
  - `[“posts”][“01”][“title”]`

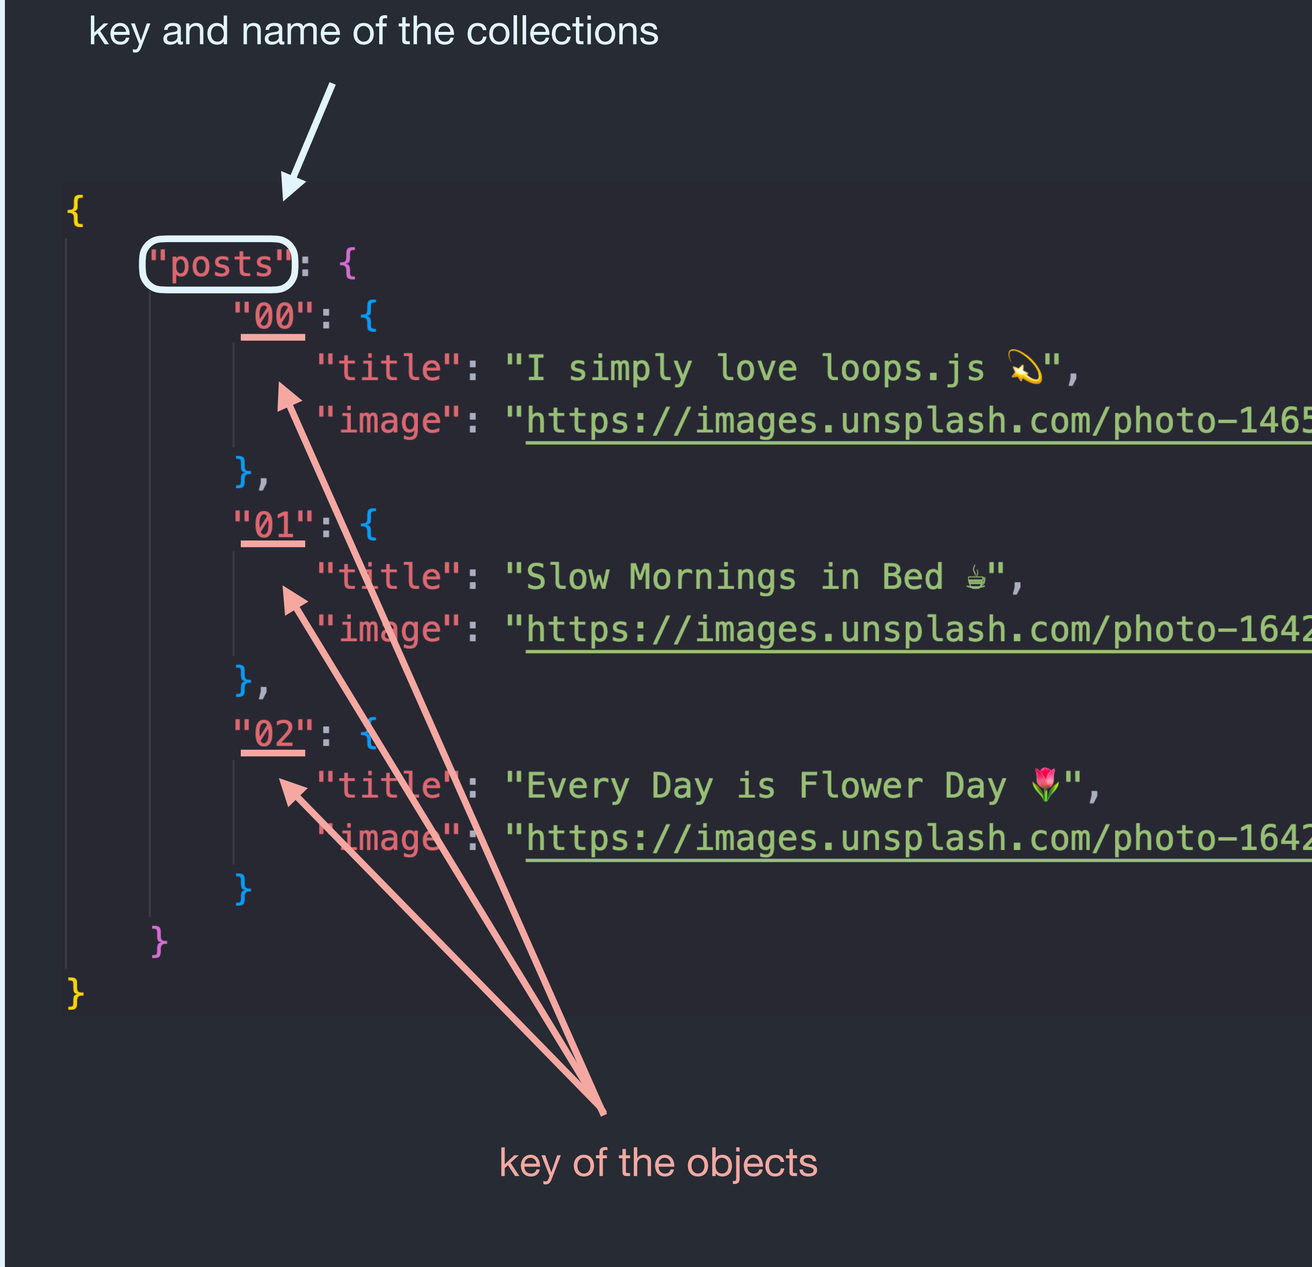

GitHub

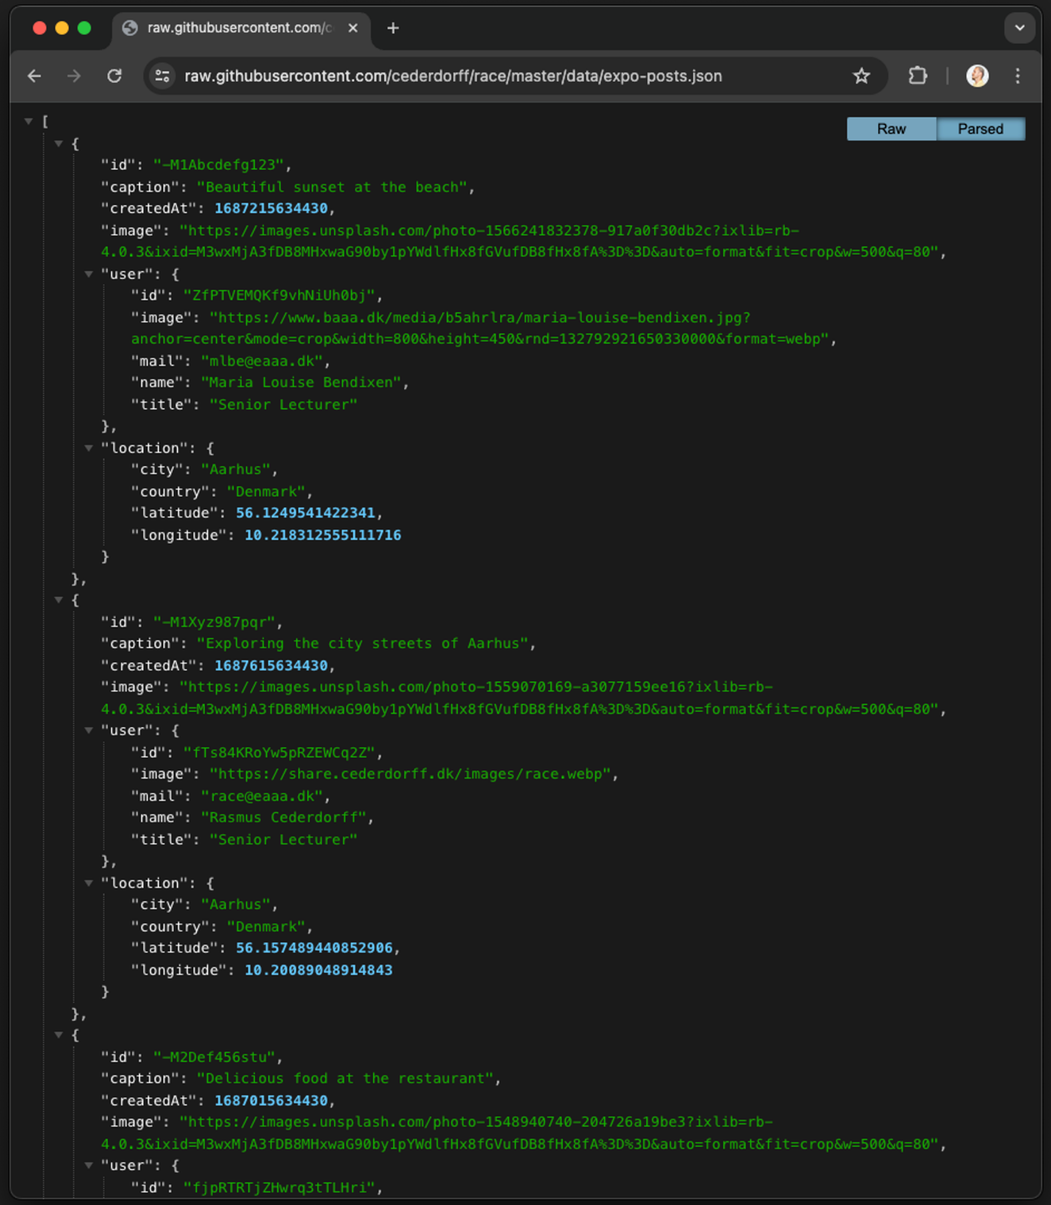

Firebase

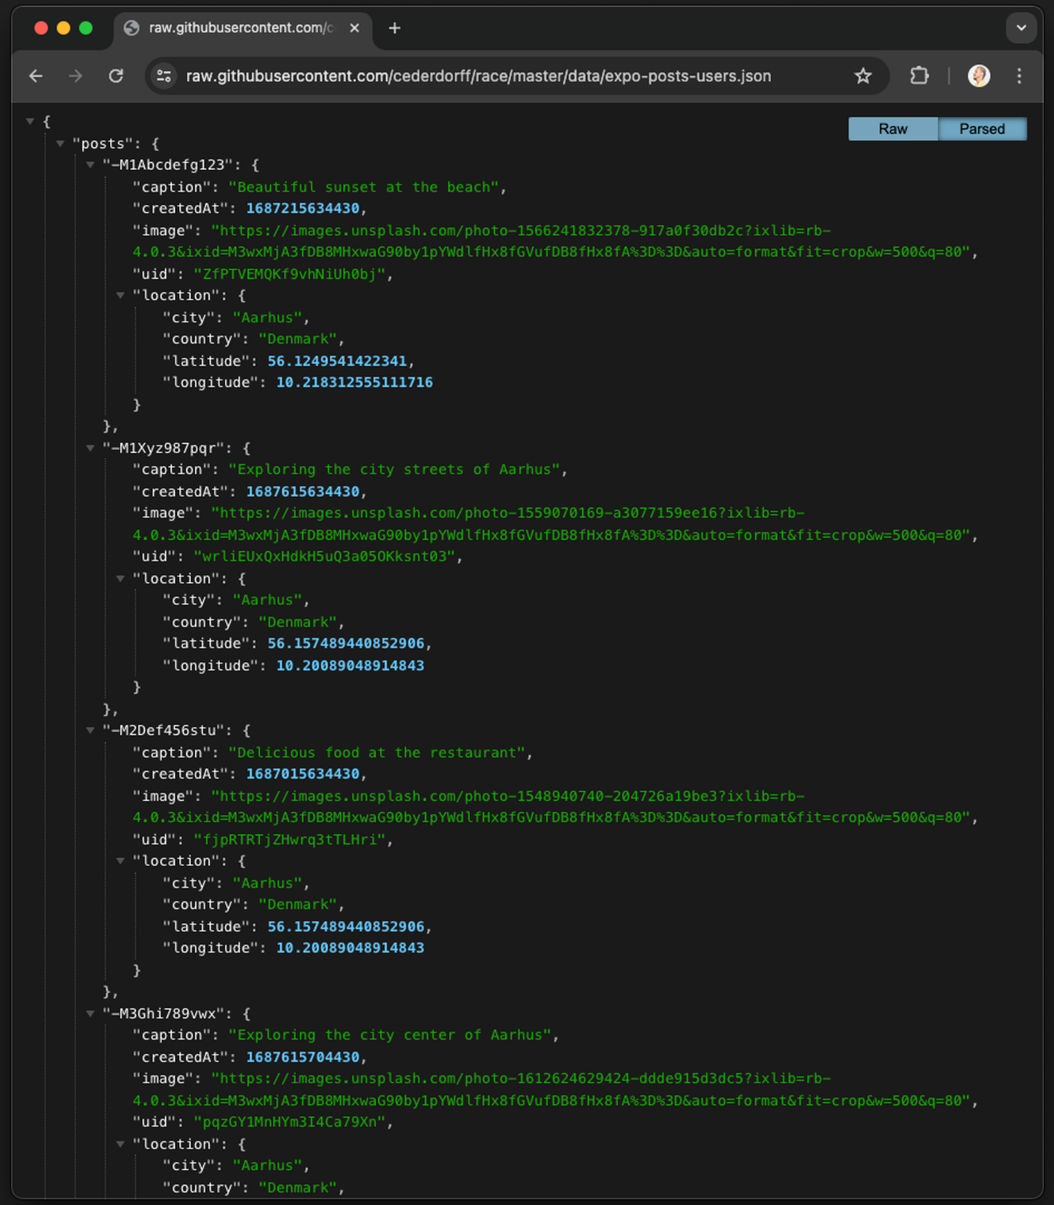


Code
Every
Day