

Let's Turn on MongoDB




Beklager, nogle af
jer har set den
før.

Men spot on på
dagens emner ✨

Databases, NoSQL & MongoDB

Web Development

RACE

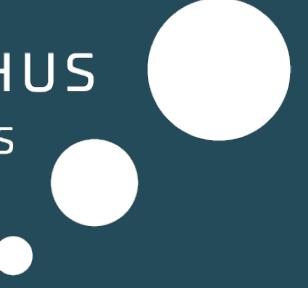


Agenda

Databases, NoSQL & MongoDB

1. NoSQL og MongoDB
2. MongoDB Atlas
3. Mongo Query Language
4. REST API med
MongoDB & React
Frontend

RACE

Web Dev Architecture

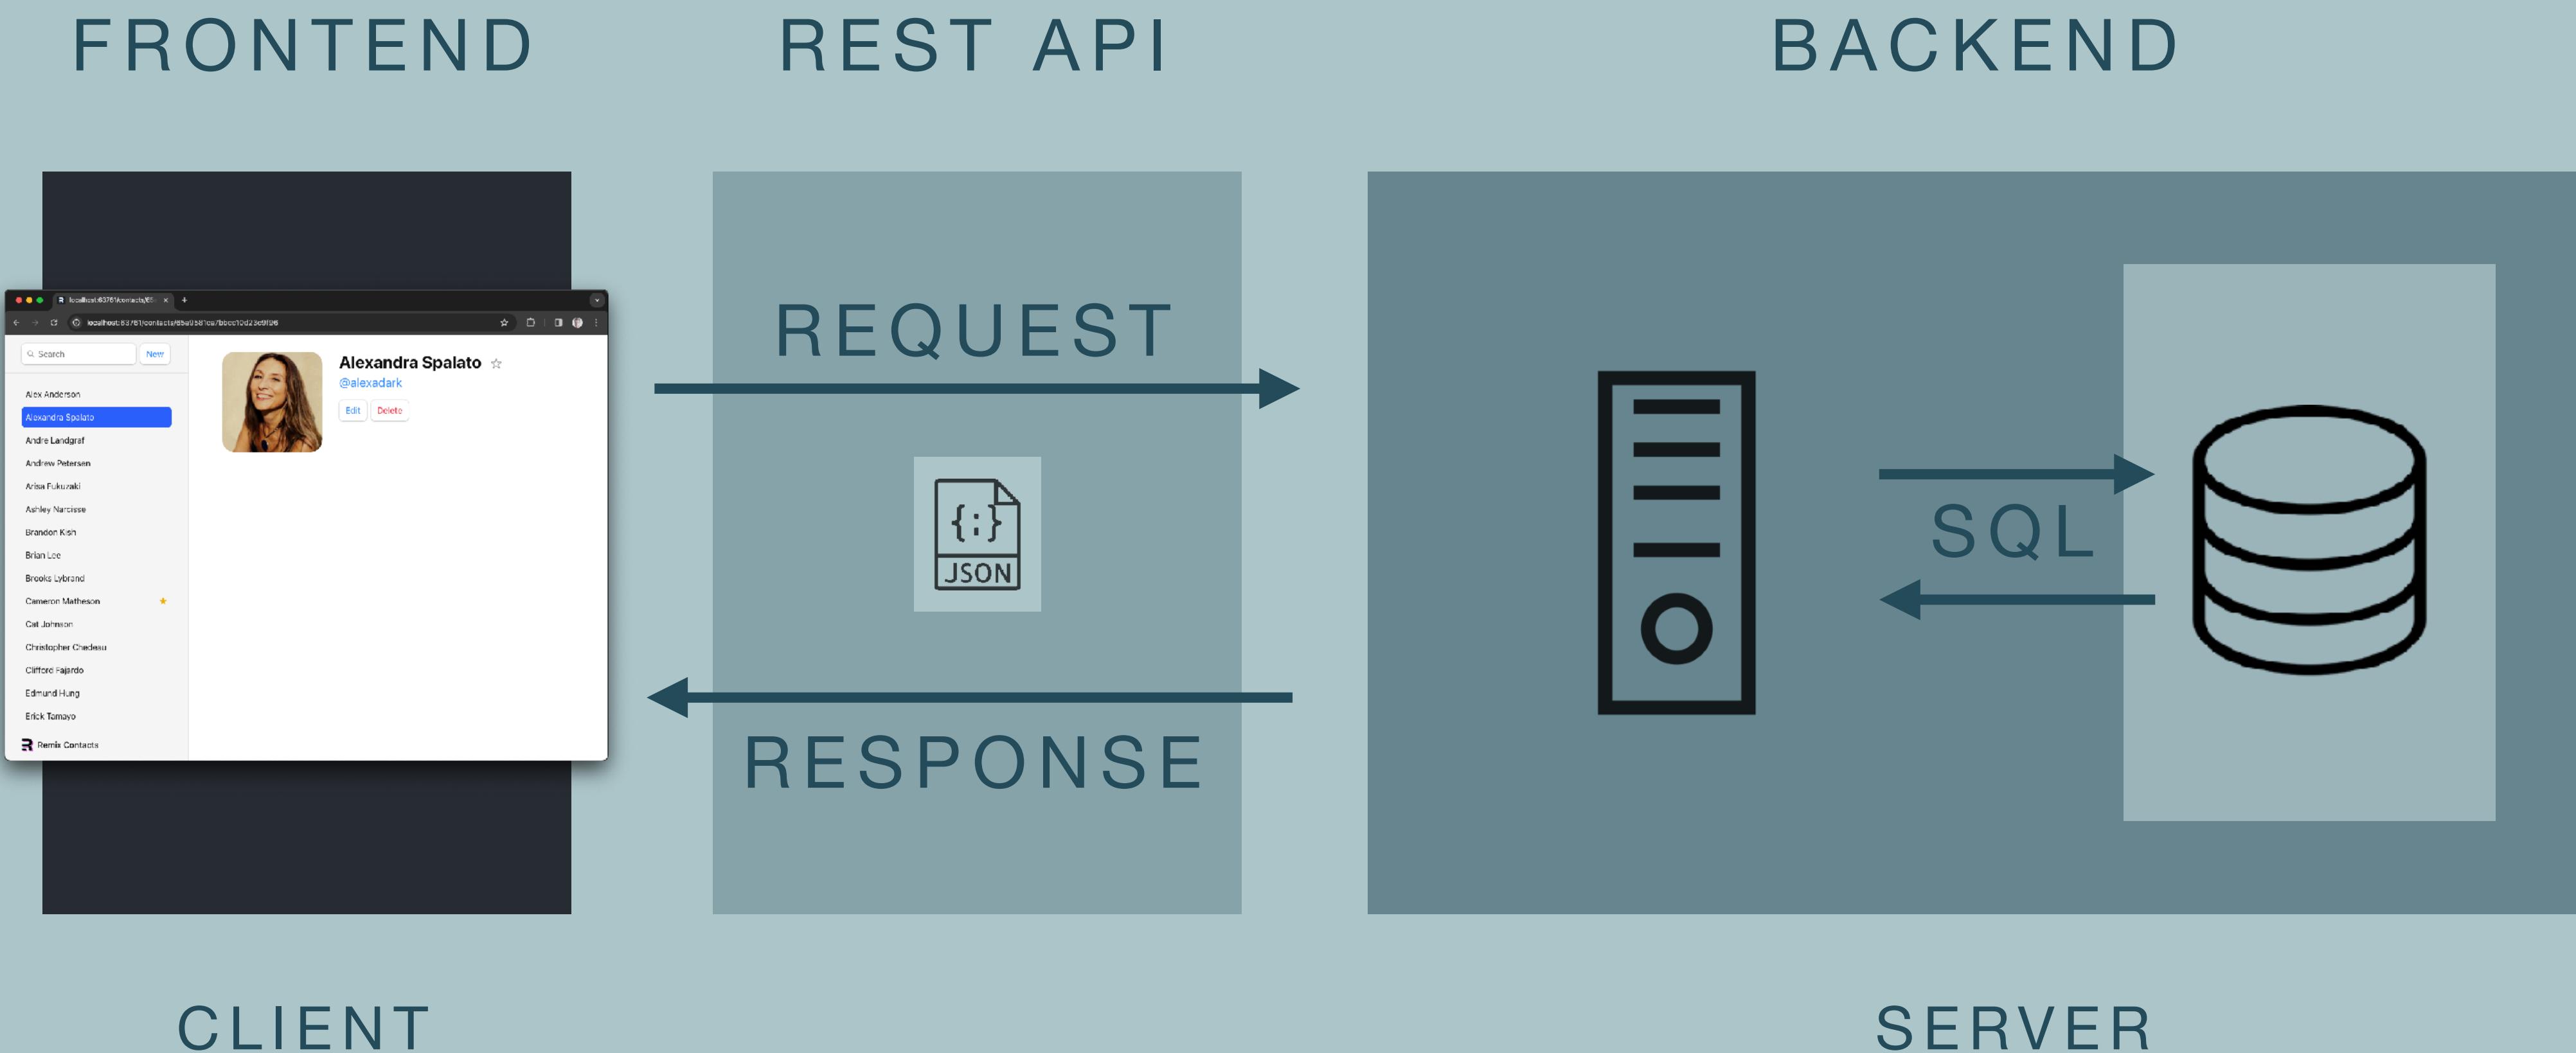


BROWSER/ THUNDERCLIENT



```
localhost:3000/contacts
Raw Parsed


[{"_id": 1, "createdAt": "2024-01-23T07:11:44.000Z", "avatar": "https://sessionize.com/image/df38-400e0002-JwbChVUj6V7DwZMc9vJEHc.jpg", "first": "Alex", "last": "Anderson", "twitter": "@alex1993", "favorite": 0}, {"_id": 2, "createdAt": "2024-01-23T07:11:44.000Z", "avatar": "https://sessionize.com/image/c8c3-400e0002-PR5UsgApAVEADZRixV4H8e.jpeg", "first": "Alexandra", "last": "Spalato", "twitter": "@alexadark", "favorite": 0}, {"_id": 3, "createdAt": "2024-01-23T07:11:44.000Z", "avatar": "https://sessionize.com/image/eec1-400e0002-HkwWKLfqecmFxLwqR9KMRw.jpg", "first": "Andre", "last": "Landgraf", "twitter": "@AndreLandgraf94", "favorite": 0}, {"_id": 4, "createdAt": "2024-01-23T07:11:44.000Z", "avatar": "https://sessionize.com/image/2694-400e0002-MYTsnszbLKTzyqJV17w2q.png", "first": "Andrea", "last": "Landgraf", "twitter": "@AndreaLandgraf94", "favorite": 0}], sessionize.com/.../eec1-40...
```

REST API

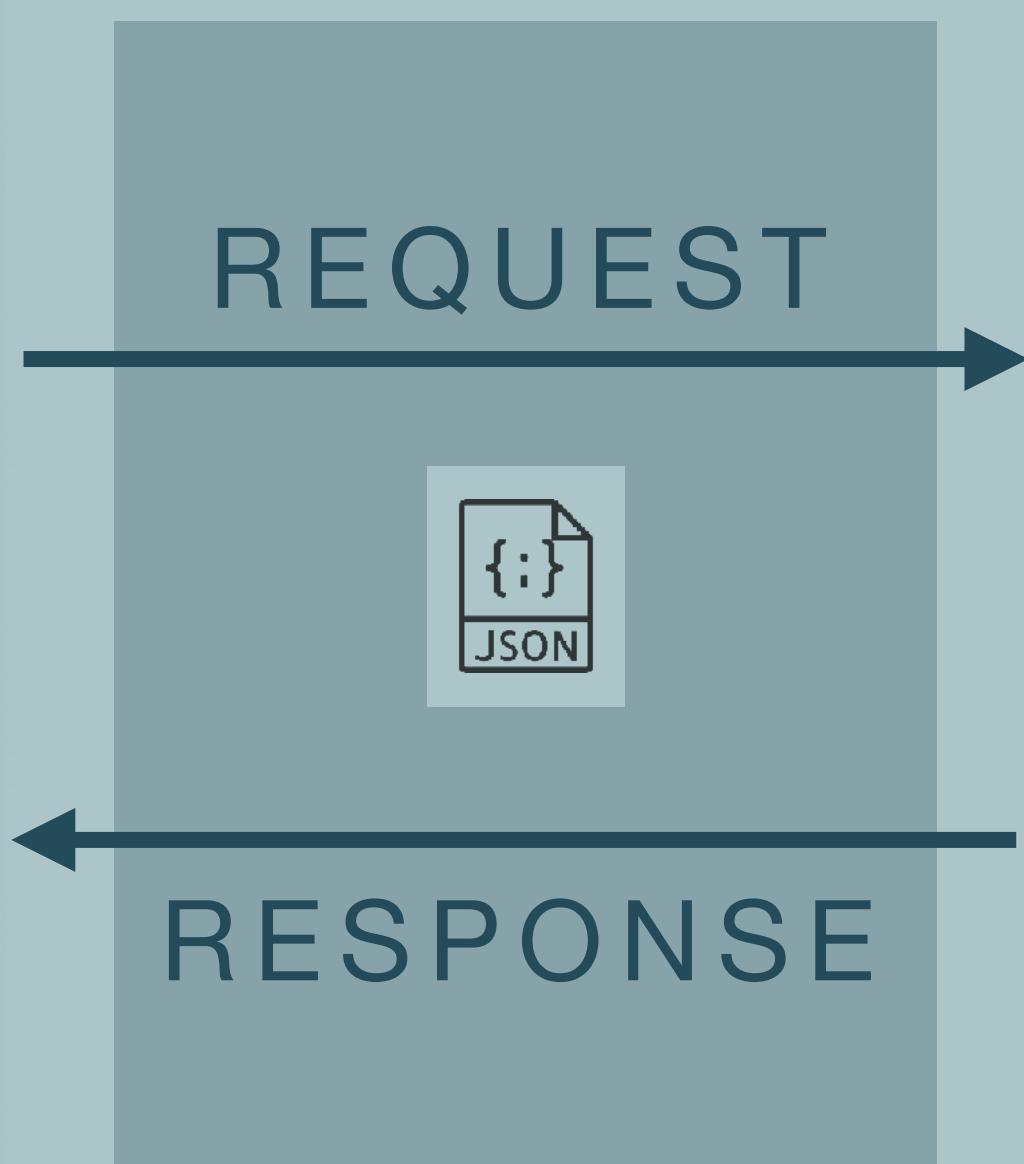

BACKEND

NODE/EXPRESS

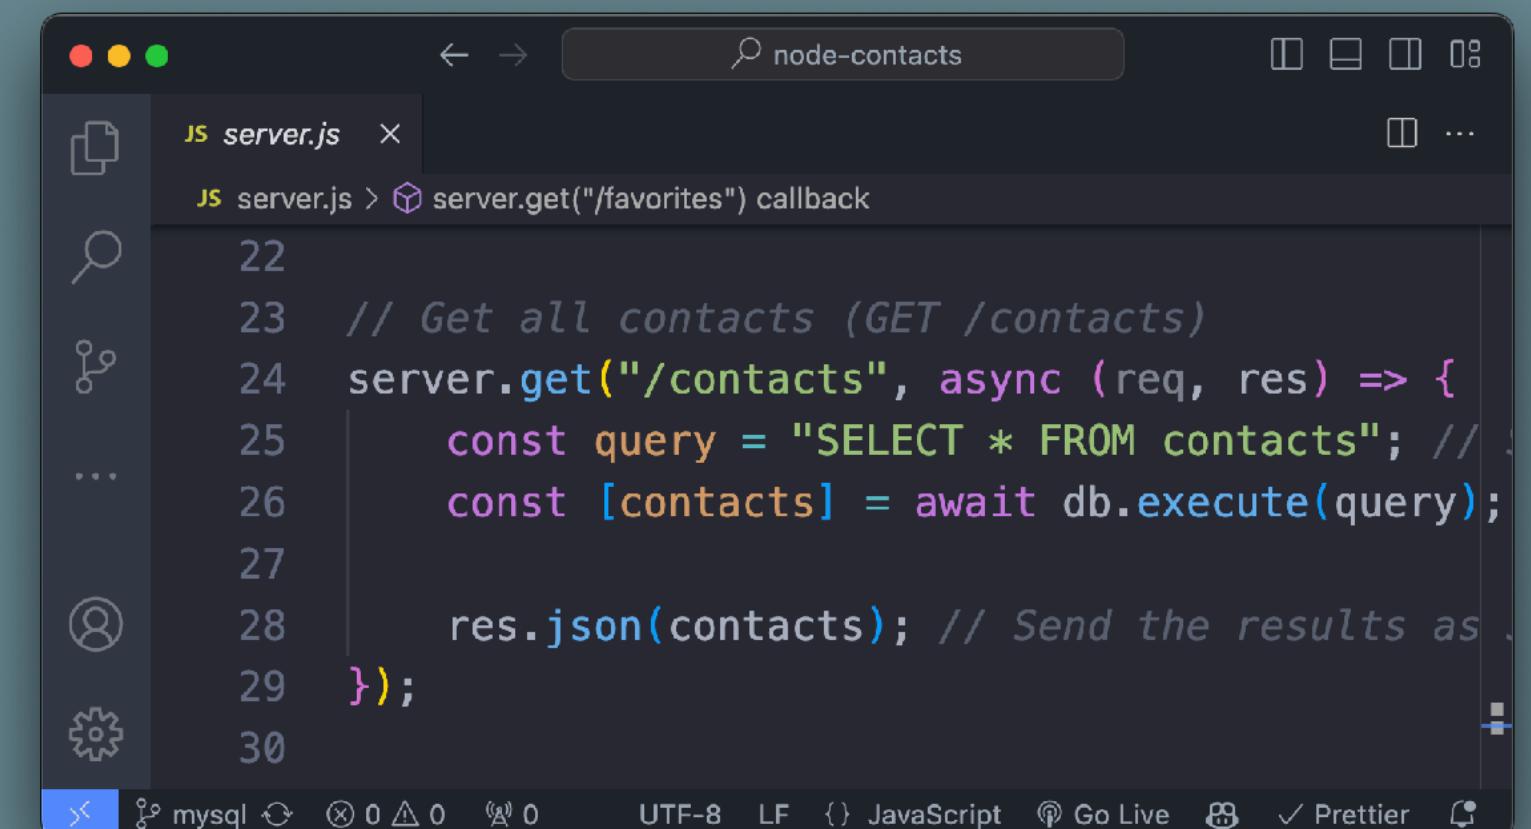

```
server.get("/favorites", async (req, res) => {
  const query = "SELECT * FROM contacts";
  const [contacts] = await db.execute(query);

  res.json(contacts);
});
```

MySQL

#	int	createdAt	timestamp	avatar	varchar(255)	first	last	twitter	varchar(50)
1	2024-01-23 08:11:44					Alex	Anderson	@alex1993	
2	2024-01-23 06:11:44					Alexandra	Spalato	@alexadark	
3	2024-01-23 06:11:44					Andre	Landgraf	@AndreLandgraf	
4	2024-01-23 06:11:44					Andrew	Petersen	@NULL	
5	2024-01-23 08:11:44					Arisa	Fukuzaki	@arisadev	
6	2024-01-23 06:11:44					Ashley	Narcisse	@darkfadr	
7	2024-01-23 06:11:44					Brandon	Kish	@NULL	
8	2024-01-23 06:11:44					Brian	Lee	@Brian_dlee	
9	2024-01-23 08:11:44					Brooks	Lybrand	@CrocksLybra	
10	2024-01-23 06:11:44					Cameron	Matheson	@matheson	
11	2024-01-23 06:11:44					Car	Johnson	@NULL	
12	2024-01-23 06:11:44					Christopher	Chedieu	@Vjeux	
13	2024-01-23 08:11:44					Clifford	Fajardo	@cliffordfajard	
14	2024-01-23 08:11:44					Edmund	Hung	@edmundhung	
15	2024-01-23 06:11:44					Erick	Tamayo	@ericklamayo	
16	2024-01-23 06:11:44					Giovanni	Benassi	@giovannibenassi	
17	2024-01-23 08:11:44					Glenn	Reyes	@GlennReyes	
18	2024-01-23 06:11:44					Igor	Minar	@igorMinar	
19	2024-01-23 06:11:44					Jon	Jensen	@Jensenz	
20	2024-01-23 06:11:44					Kent	Dodes	@kentcdodds	
21	2024-01-23 08:11:44					Michael	Jackson	@NULL	


CLIENT

SERVER

BROWSER/ THUNDERCLIENT

REST API


BACKEND

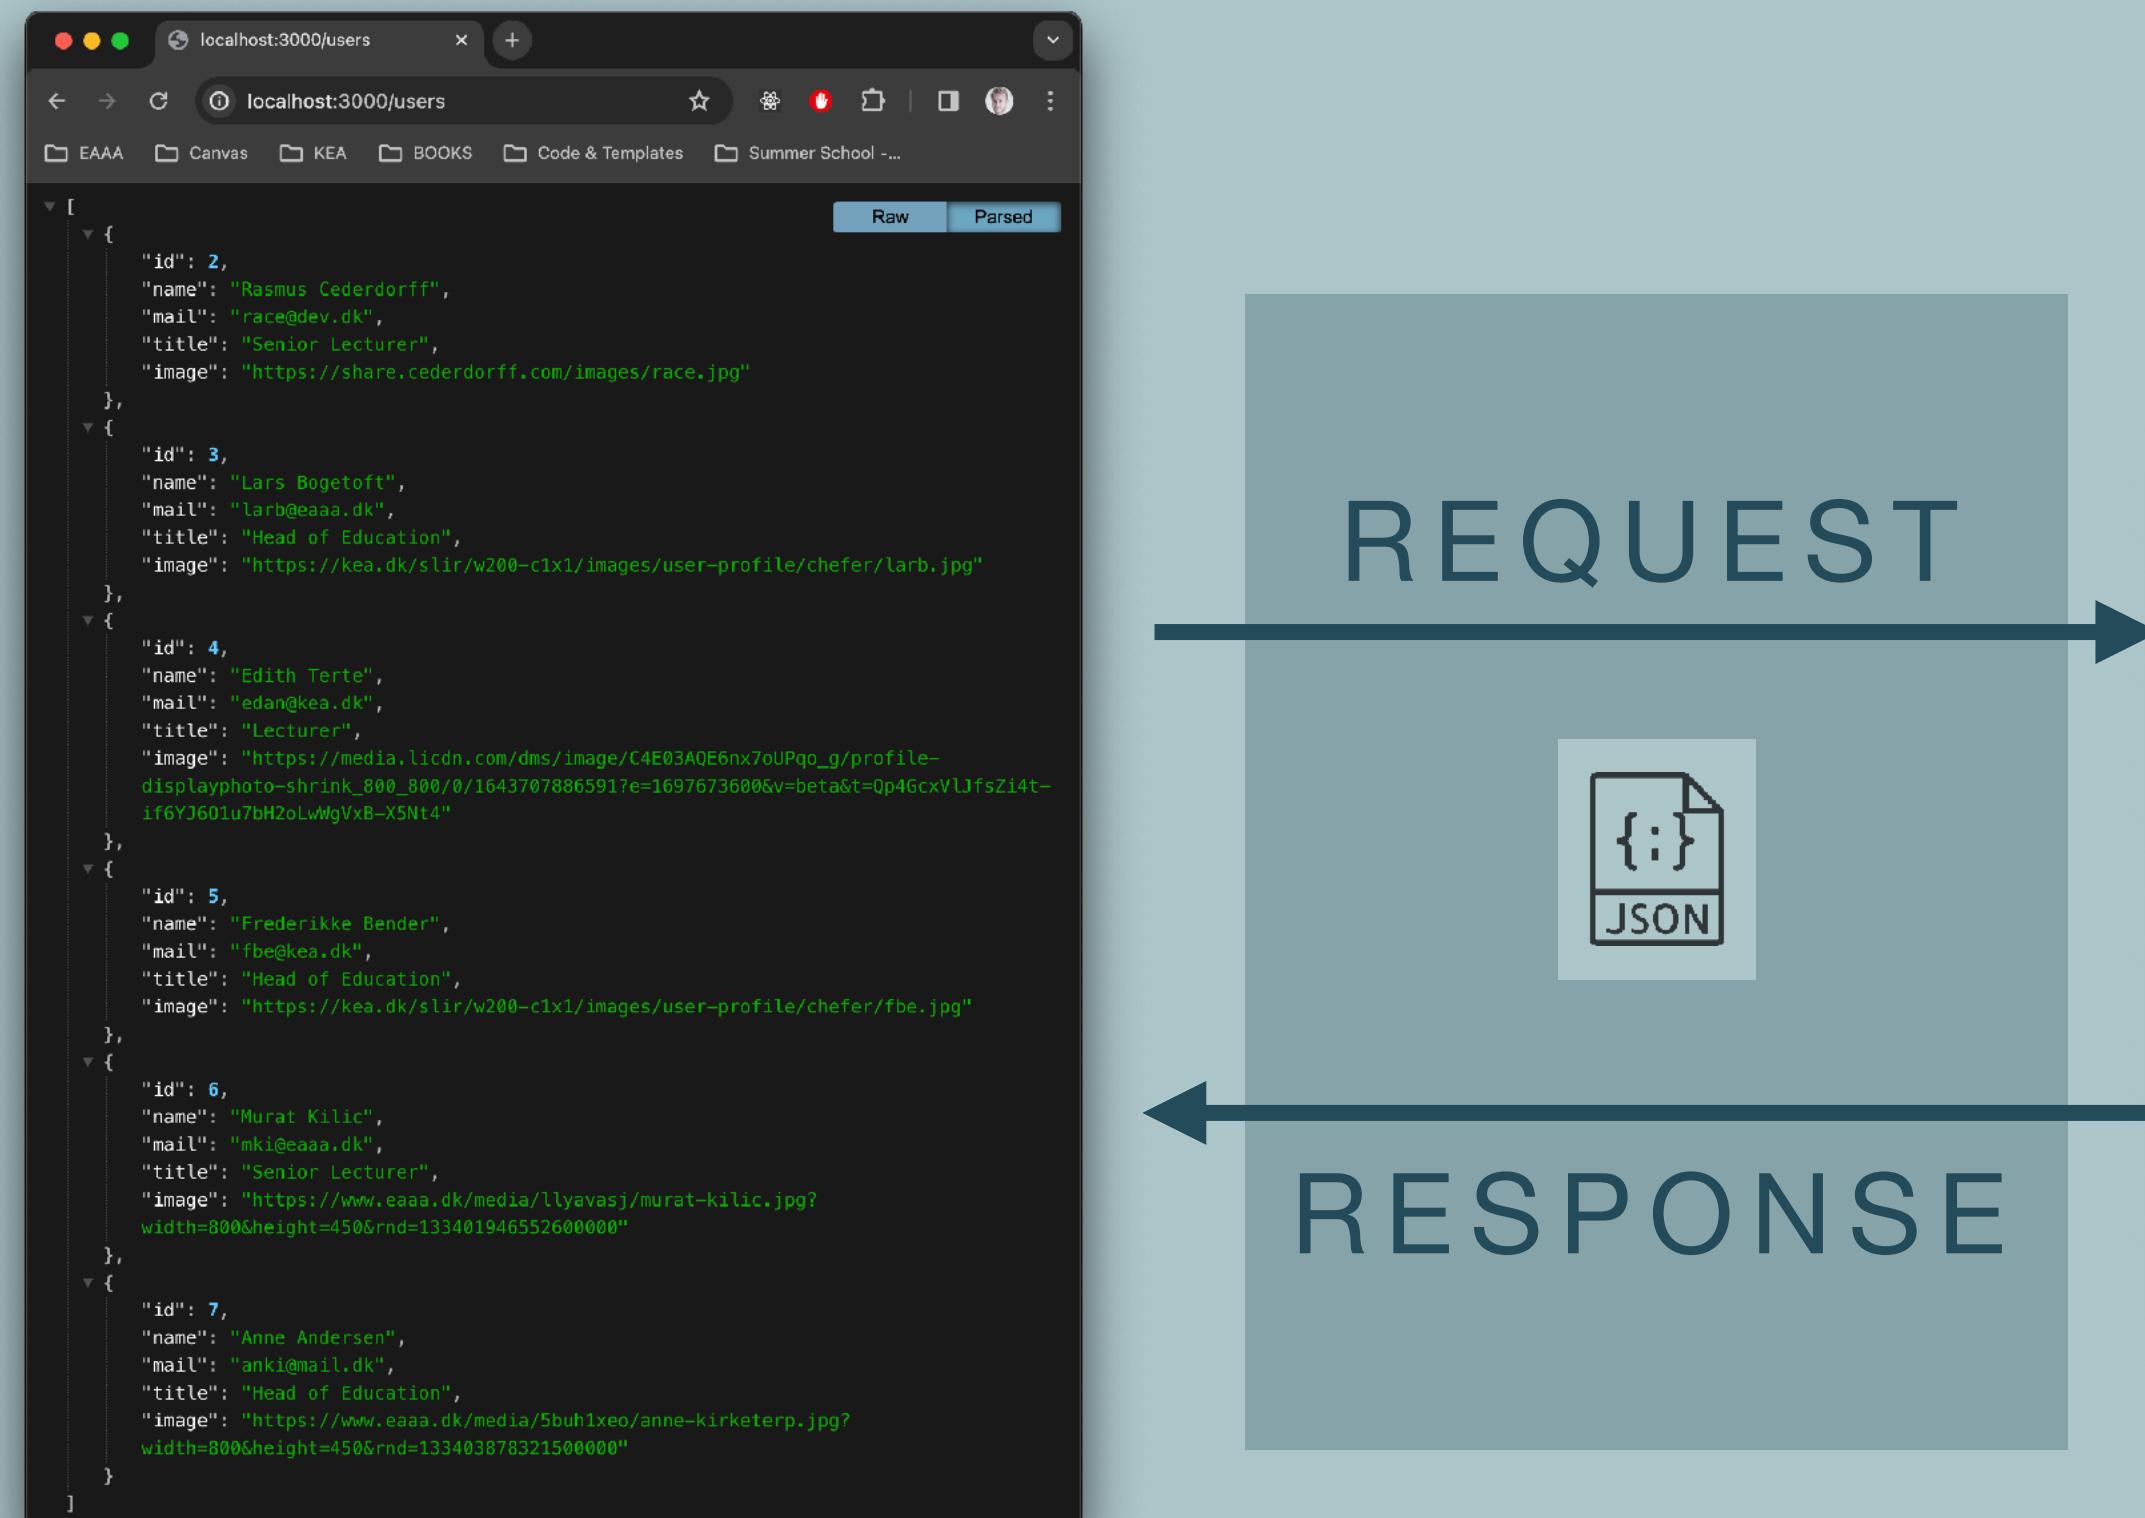

CLIENT

S E R V E R

NODE/EXPRESS

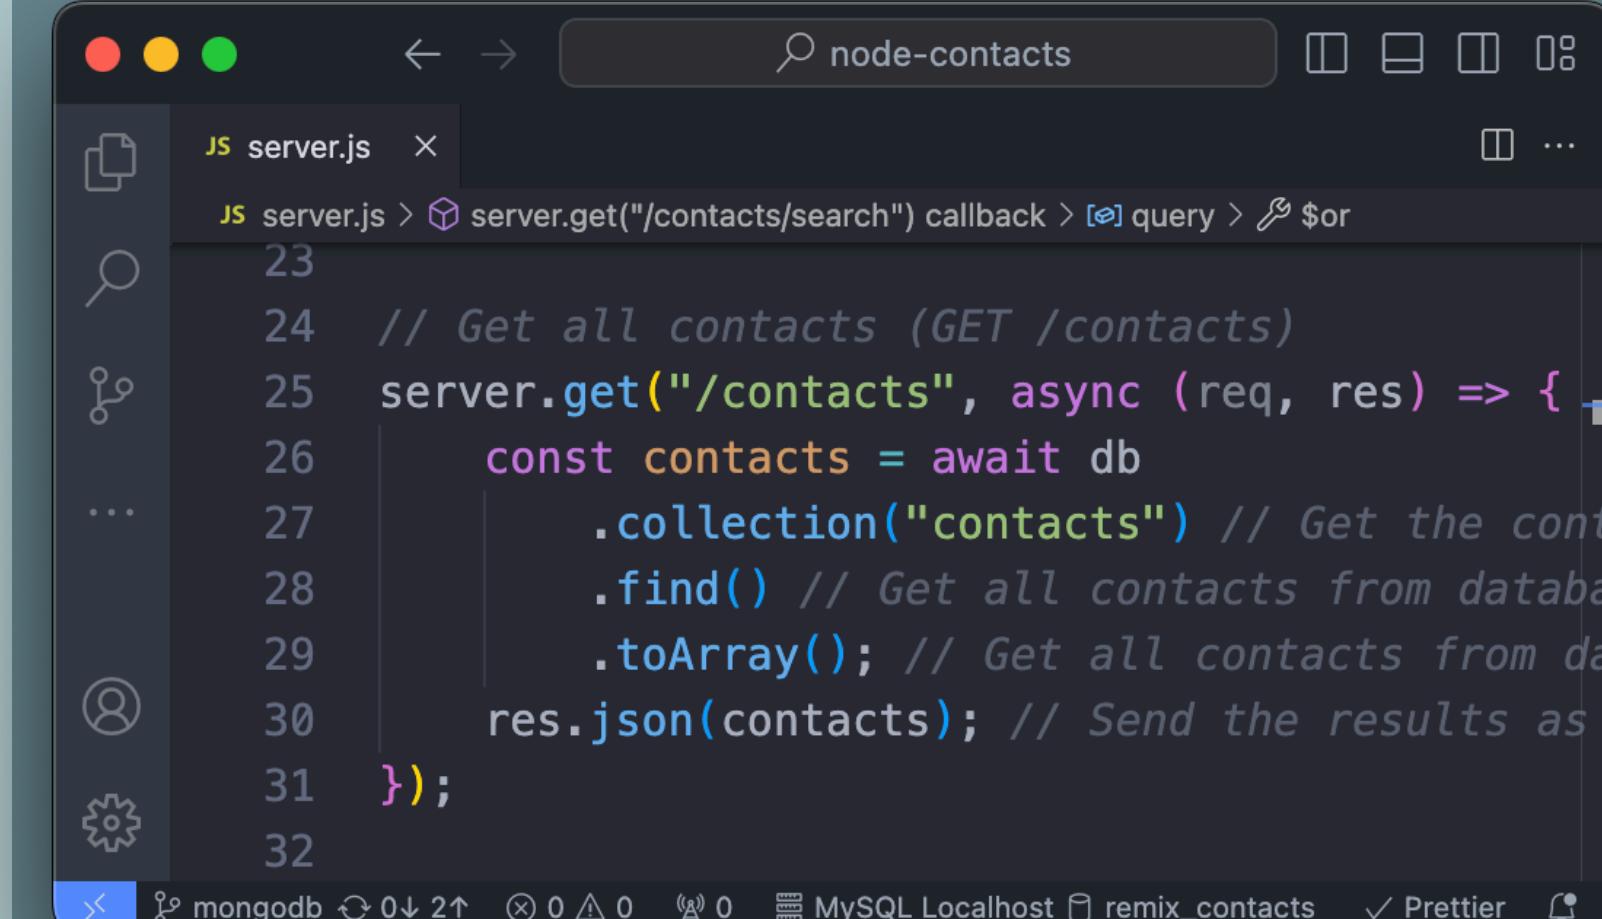

A screenshot of a Mac OS X desktop environment. At the top, there's a dark grey menu bar with standard OS X icons for file, edit, view, etc. Below the menu bar is a dark grey dock containing various application icons. The main window is a terminal application showing a command-line interface with some output. Overlaid on the terminal is a code editor window for a file named 'server.js'. The code editor has a dark theme with syntax highlighting for JavaScript. The file content is as follows:

```
JS server.js x
JS server.js > ↻ server.get("/contacts/search") callback > ↻ query > ↻ $or
23
24 // Get all contacts (GET /contacts)
25 server.get("/contacts", async (req, res) => {
26     const contacts = await db
27         .collection("contacts") // Get the contacts collection
28         .find() // Get all contacts from database
29         .toArray(); // Get all contacts from database
30     res.json(contacts); // Send the results as JSON
31 });
32
```

MongoDB ATLAS

```
[  
 {  
   Edit Document  
   "_id": "65a9581ca7bbcc10d23c9f86",  
   "avatar": "https://sessionize.com/image/1940-400e400o2-Enh9dnYmr",  
   "first": "Glennnn",  
   "last": "Reyes",  
   "twitter": "@glnnrys",  
   "notes": "",  
   "favorite": true  
 },  
 {  
   Edit Document  
   "_id": "65a9581ca7bbcc10d23c9f88",  
   "avatar": "https://sessionize.com/image/d14d-400e400o2-pyB229HyF",  
   "first": "Oscar",  
   "last": "Newman",  
   "twitter": "@__oscarnewman"  
 },  
 {  
   Edit Document  
   "_id": "65a9581ca7bbcc10d23c9f90",  
   "avatar": "https://sessionize.com/image/2694-400e400o2-MYYTsnszb",  
   "first": "Andrew",  
   "last": "Petersen"  
 },  
 {  
   Edit Document  
   "_id": "65a9581ca7bbcc10d23c9f9f",  
   "avatar": "https://sessionize.com/image/c73a-400e400o2-4MTaTq6ft",  
   "first": "Monica",  
   "last": "Powell",  
   "twitter": "@indigitalcolor"  
 },  
 {  
   Edit Document  
   "_id": "65a9581ca7bbcc10d23c9f87",  
   "avatar": "https://sessionize.com/image/9273-400e400o2-3tyrUE3Hj",  
   "first": "Ryan",  
   "last": "Florence"  
 },
```

Types

There are various types of databases, including relational databases (such as MySQL, PostgreSQL, and Oracle), NoSQL databases (like MongoDB and Cassandra), and other specialized databases tailored to specific use cases.



ORACLE





Most Popular Databases




<https://survey.stackoverflow.co/2023/#section-most-popular-technologies-databases>

NoSQL and MongoDB



100 *SECONDS OF*

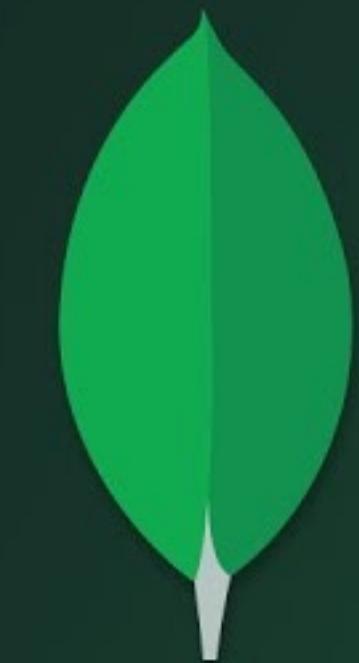

mongoDB

https://www.youtube.com/watch?v=-bt_y4Loofg




Why Non-Relational Databases?



Where it Began: Relational


Key features of relational databases

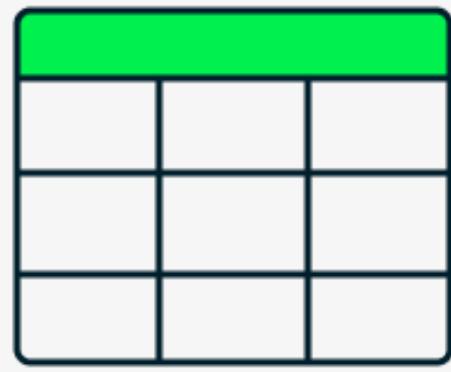

Related data is stored in rows and columns in one table.



SQL (Structured Query Language)

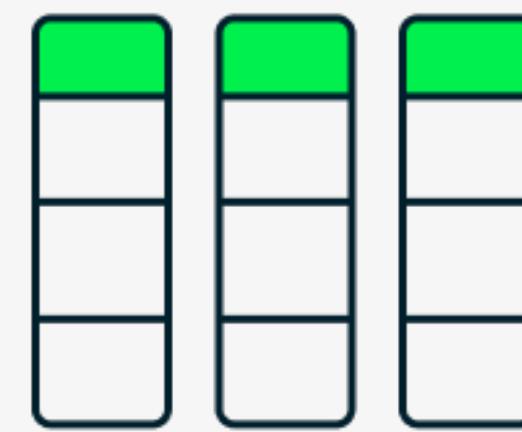

A table uses columns to define the information being stored and rows for the actual data.




Filling in the Gap





Relational Model: Challenges

- Issues with scalability and flexibility
- Not all data is structured
- Object-oriented, tables and columns?

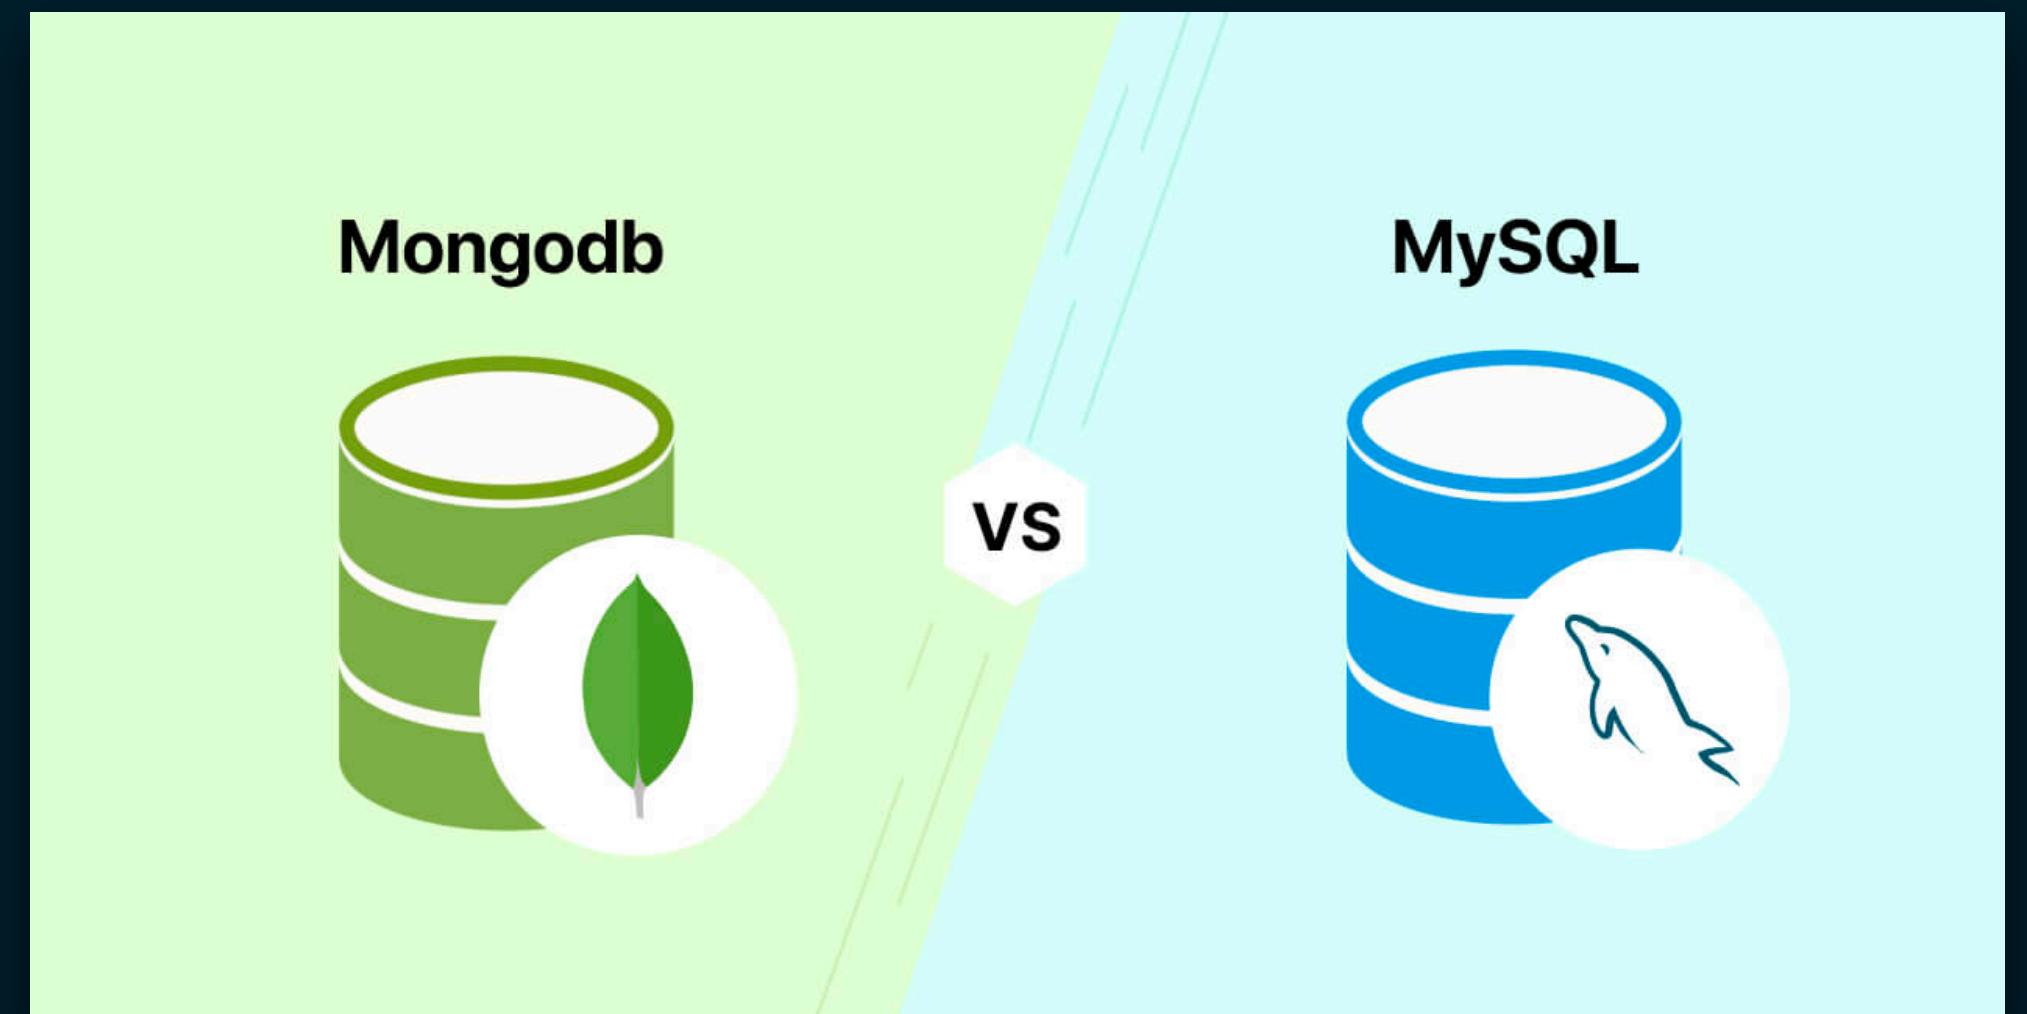



```
const user = {  
  id: 6,  
  name: "Murat Kilic",  
  mail: "mki@eaaa.dk",  
  title: "Senior Lecturer",  
  image: "https://www.eaaa.dk/media/llyavasj/murat-kilic.jpg"  
};
```

id	name	mail	title	image
1	Peter Lind	petl@kea.dk	Senior Lecturer	https://share.cederdorff.com/i
2	Rasmus Cederdorff	race@dev.dk	Senior Lecturer	https://share.cederdorff.com/i
3	Lars Bogetoft	larb@eaaa.dk	Head of Education	https://kea.dk/slir/w200-c1x1/
4	Edith Terte	edan@kea.dk	Lecturer	https://media.licdn.com/dms/
5	Frederikke Bender	fbe@kea.dk	Head of Education	https://kea.dk/slir/w200-c1x1/
6	Murat Kilic	mki@eaaa.dk	Senior Lecturer	https://www.eaaa.dk/media/llyavasj/murat-kilic.jpg
7	Anne Kirketerp	anki@eaaa.dk	Head of Education	https://www.eaaa.dk/media/5buhs



From object to database table? WTF!1!



Why NoSQL?




https://www.youtube.com/watch?v=0X43QfCfyk0&t=35s&ab_channel=MongoDB

- **Flexibility:** NoSQL databases do not require a predefined schema, which means that the data structure can be easily changed as the application evolves. This makes them well-suited for applications that handle unstructured or semi-structured data.
- **Scalability:** NoSQL databases are typically horizontally scalable, which means that they can be easily added to more servers to handle increasing data and workloads. This makes them ideal for applications that need to support large amounts of data or that experience sudden spikes in traffic.
- **Performance:** NoSQL databases can often outperform SQL databases for certain types of workloads, such as read-heavy applications or applications that require low latency. This is because they are designed to store and retrieve data efficiently, without the overhead of maintaining a rigid schema.
- **Ease of use:** NoSQL databases can be easier to use than SQL databases, especially for developers who are not familiar with traditional relational databases. They often have simpler APIs and data models, which can make it easier to develop and maintain applications.



But Why MongoDB?

- **Data Flexibility:** MongoDB handles unstructured data well, while MySQL is structured.
- **Schema:** MongoDB is schema-less, allowing for dynamic data, while MySQL requires a predefined schema.
- **Scalability:** MongoDB is horizontally scalable, beneficial for large datasets and high traffic. MySQL may face challenges with horizontal scalability.
- **Use Cases:** MongoDB suits document-oriented and complex data structures. MySQL is often preferred for traditional relational data.
- **Development Speed:** MongoDB's flexibility can accelerate development for evolving applications.
- **Specific Application Needs:** Choose based on project requirements, considering data complexity and scalability.

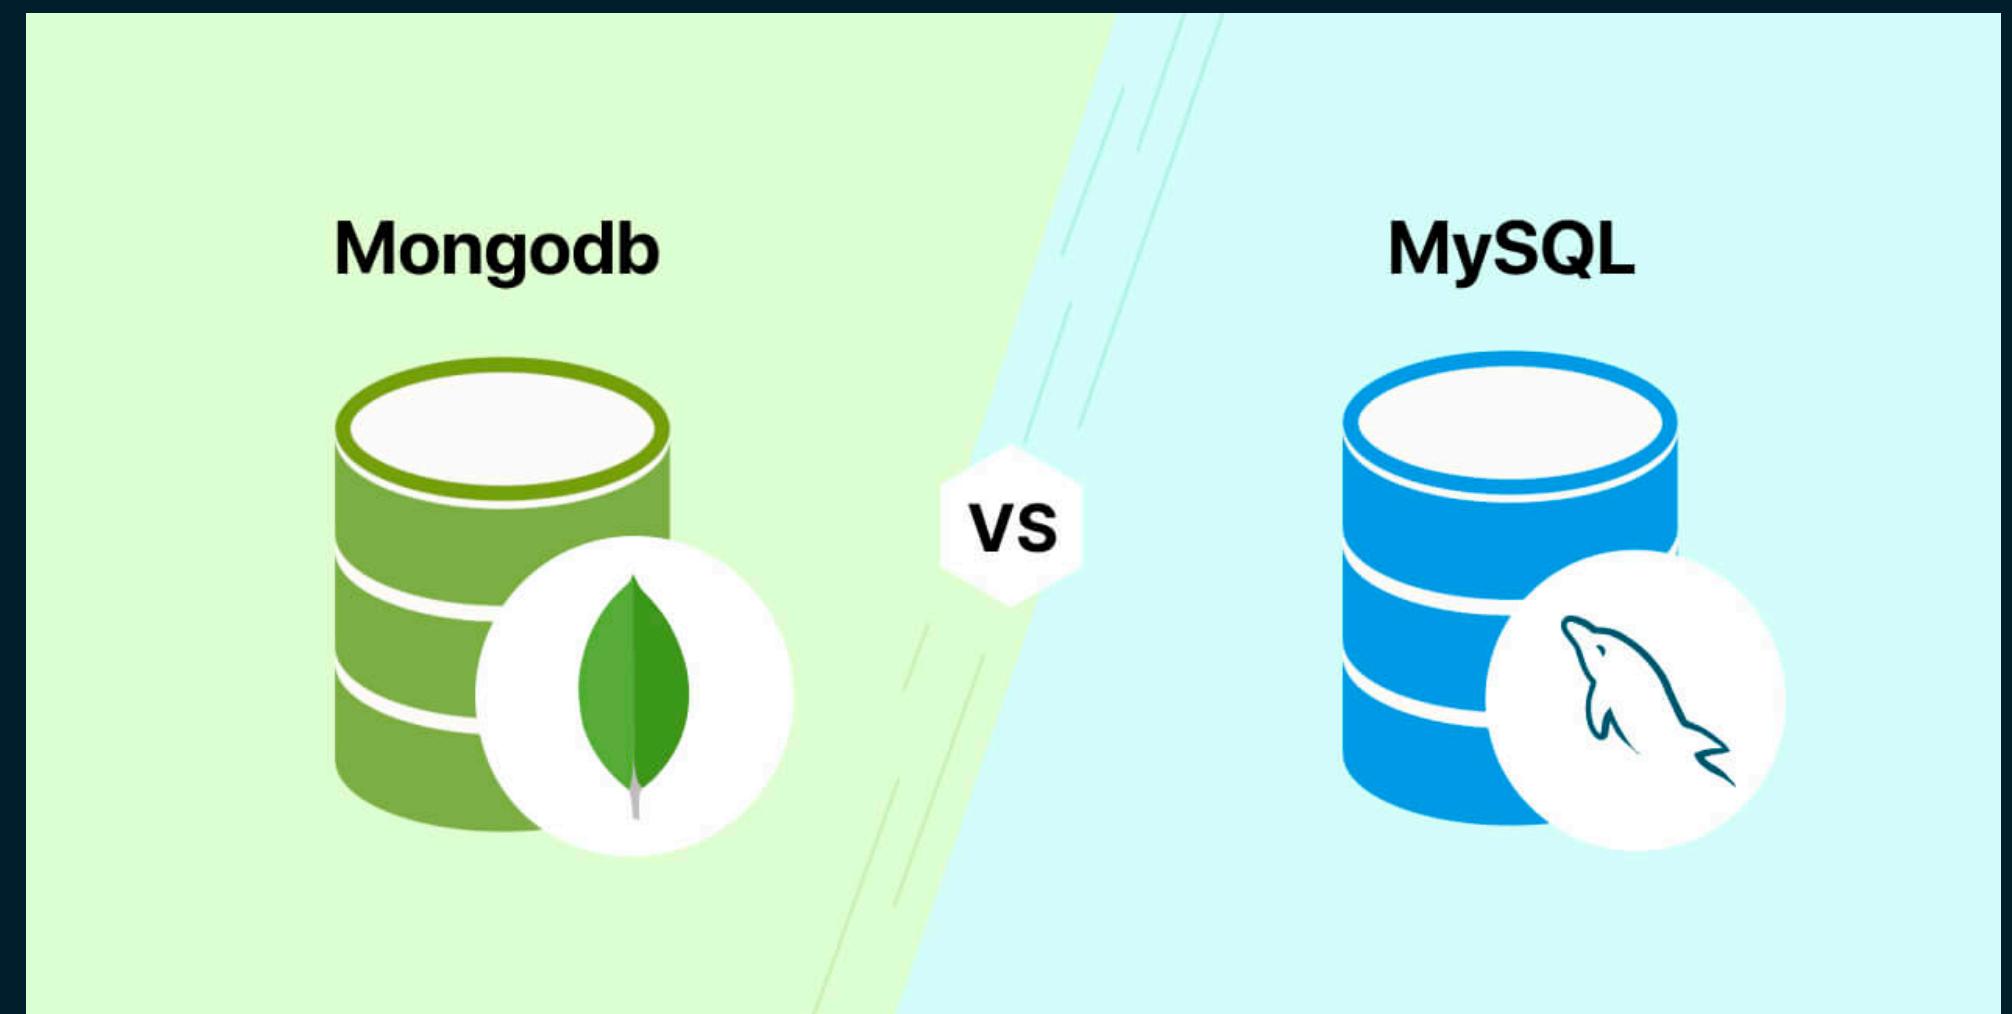




To fix the problem, various technology and software companies introduced new databases referred to as **NoSQL** or **non-relational**.



- Polymorphic data structures
- Flexible schemas
- Easy to scale large workloads

What is a non-relational database?

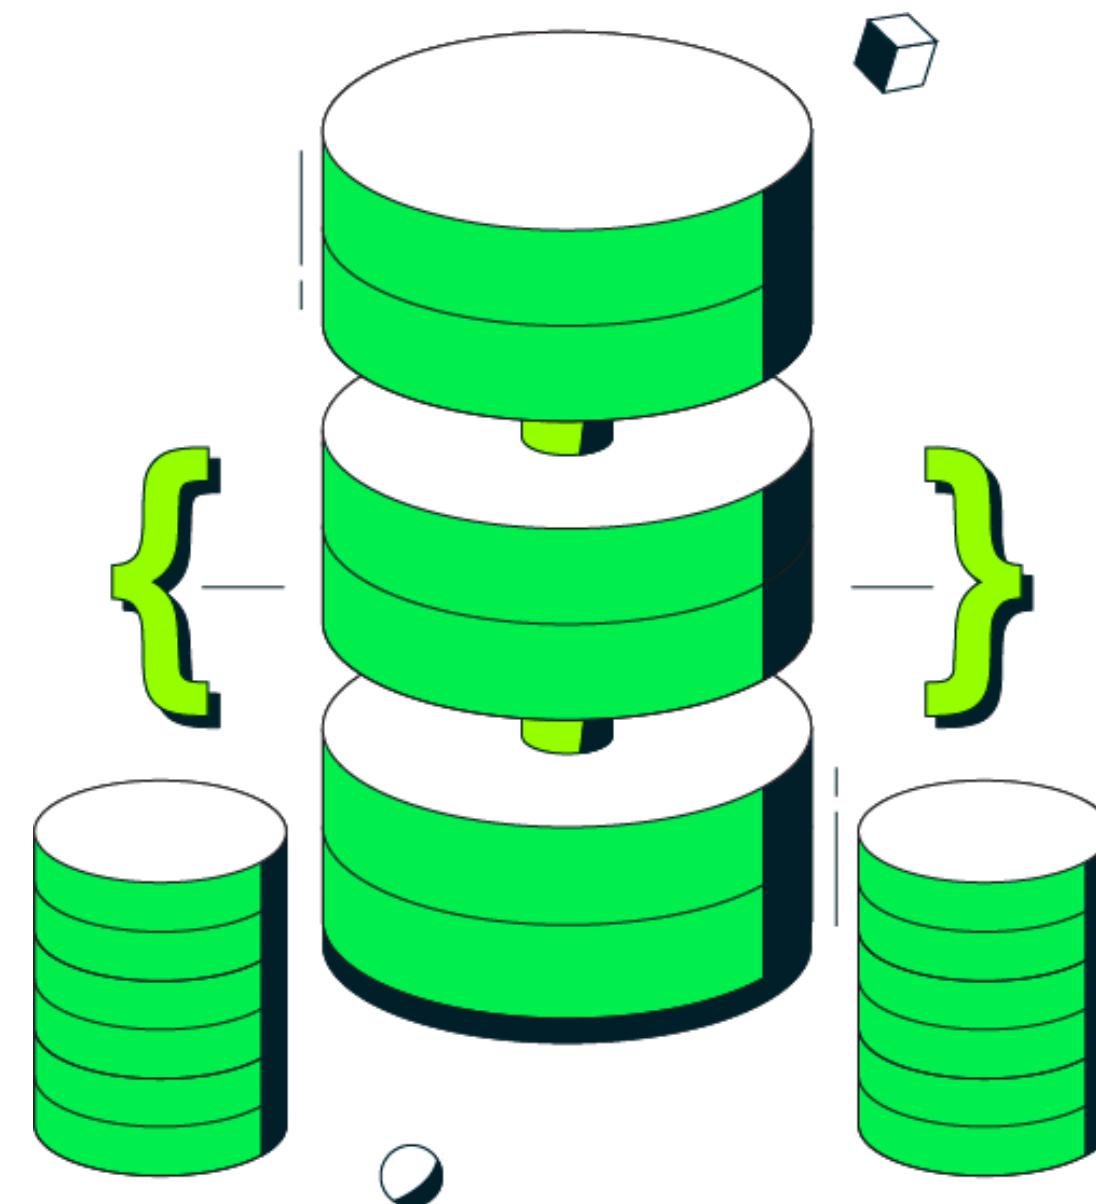


Non-Relational Database Types






Non-Relational Database Types

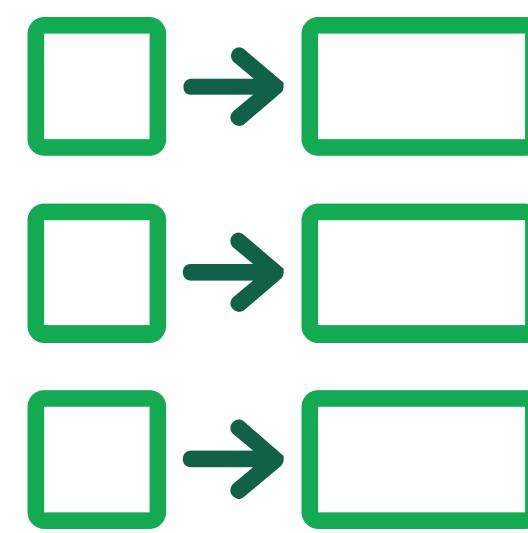


Key/Value



Graph

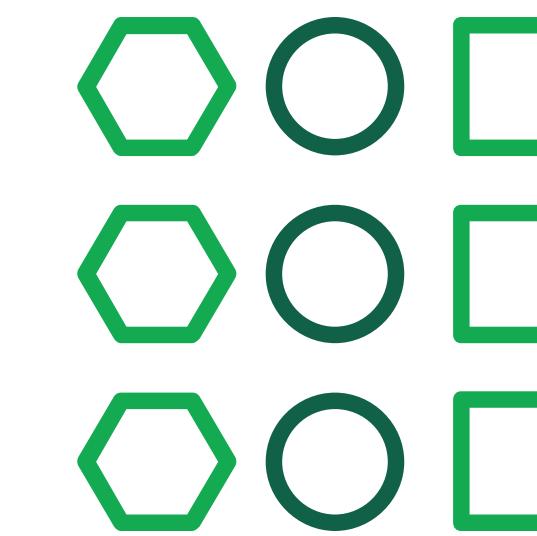

Column

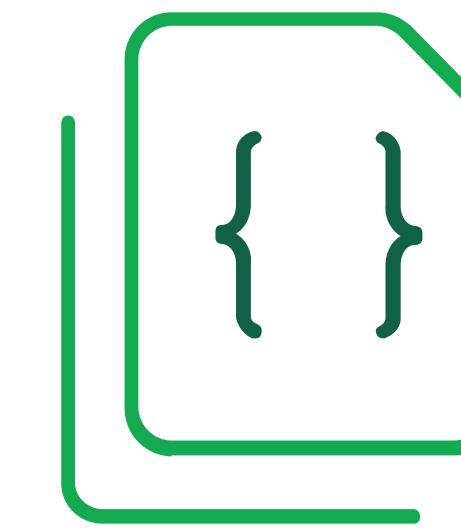


Document



Structure

- A unique key is paired with a collection of values, where the values can be anything from a string to a large binary object

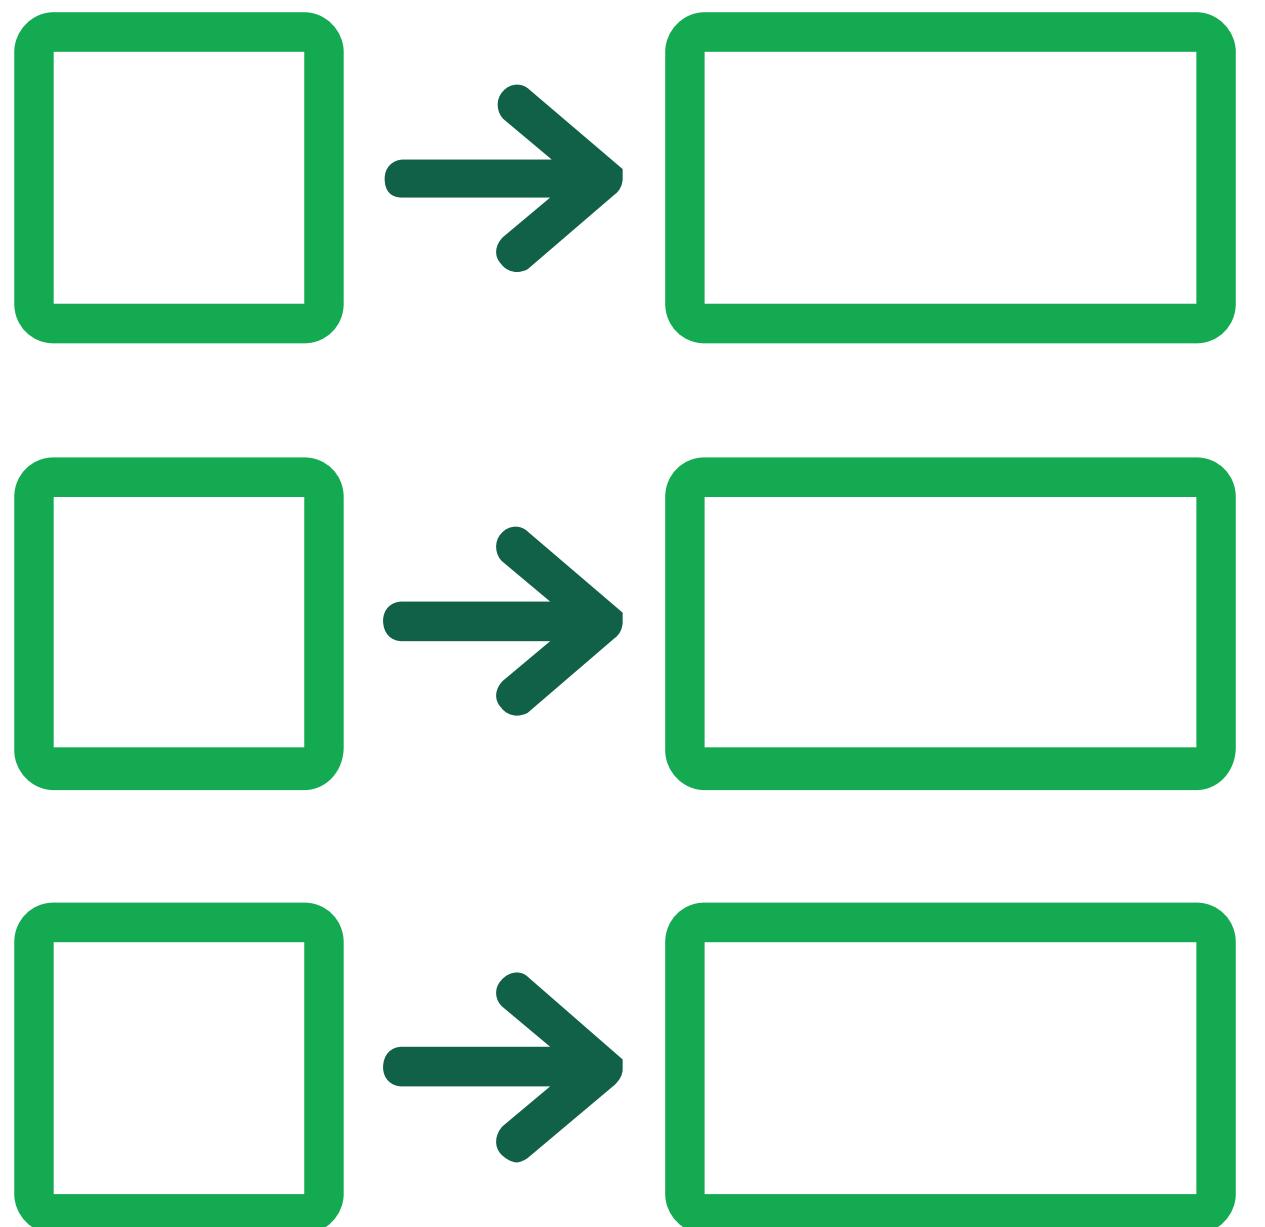

Strength

- Simple data model

Key/Value Database

Key/Value: Example

Key	Value
Name	Sherlock Holmes
Age	40
Address	221B Baker Street



Structure

- Captures connected data
- Each element is stored as a node
- Connections between nodes are called links or relationships


Strength

- Traverses the connections between data rapidly



Graph Database

Graph: Example

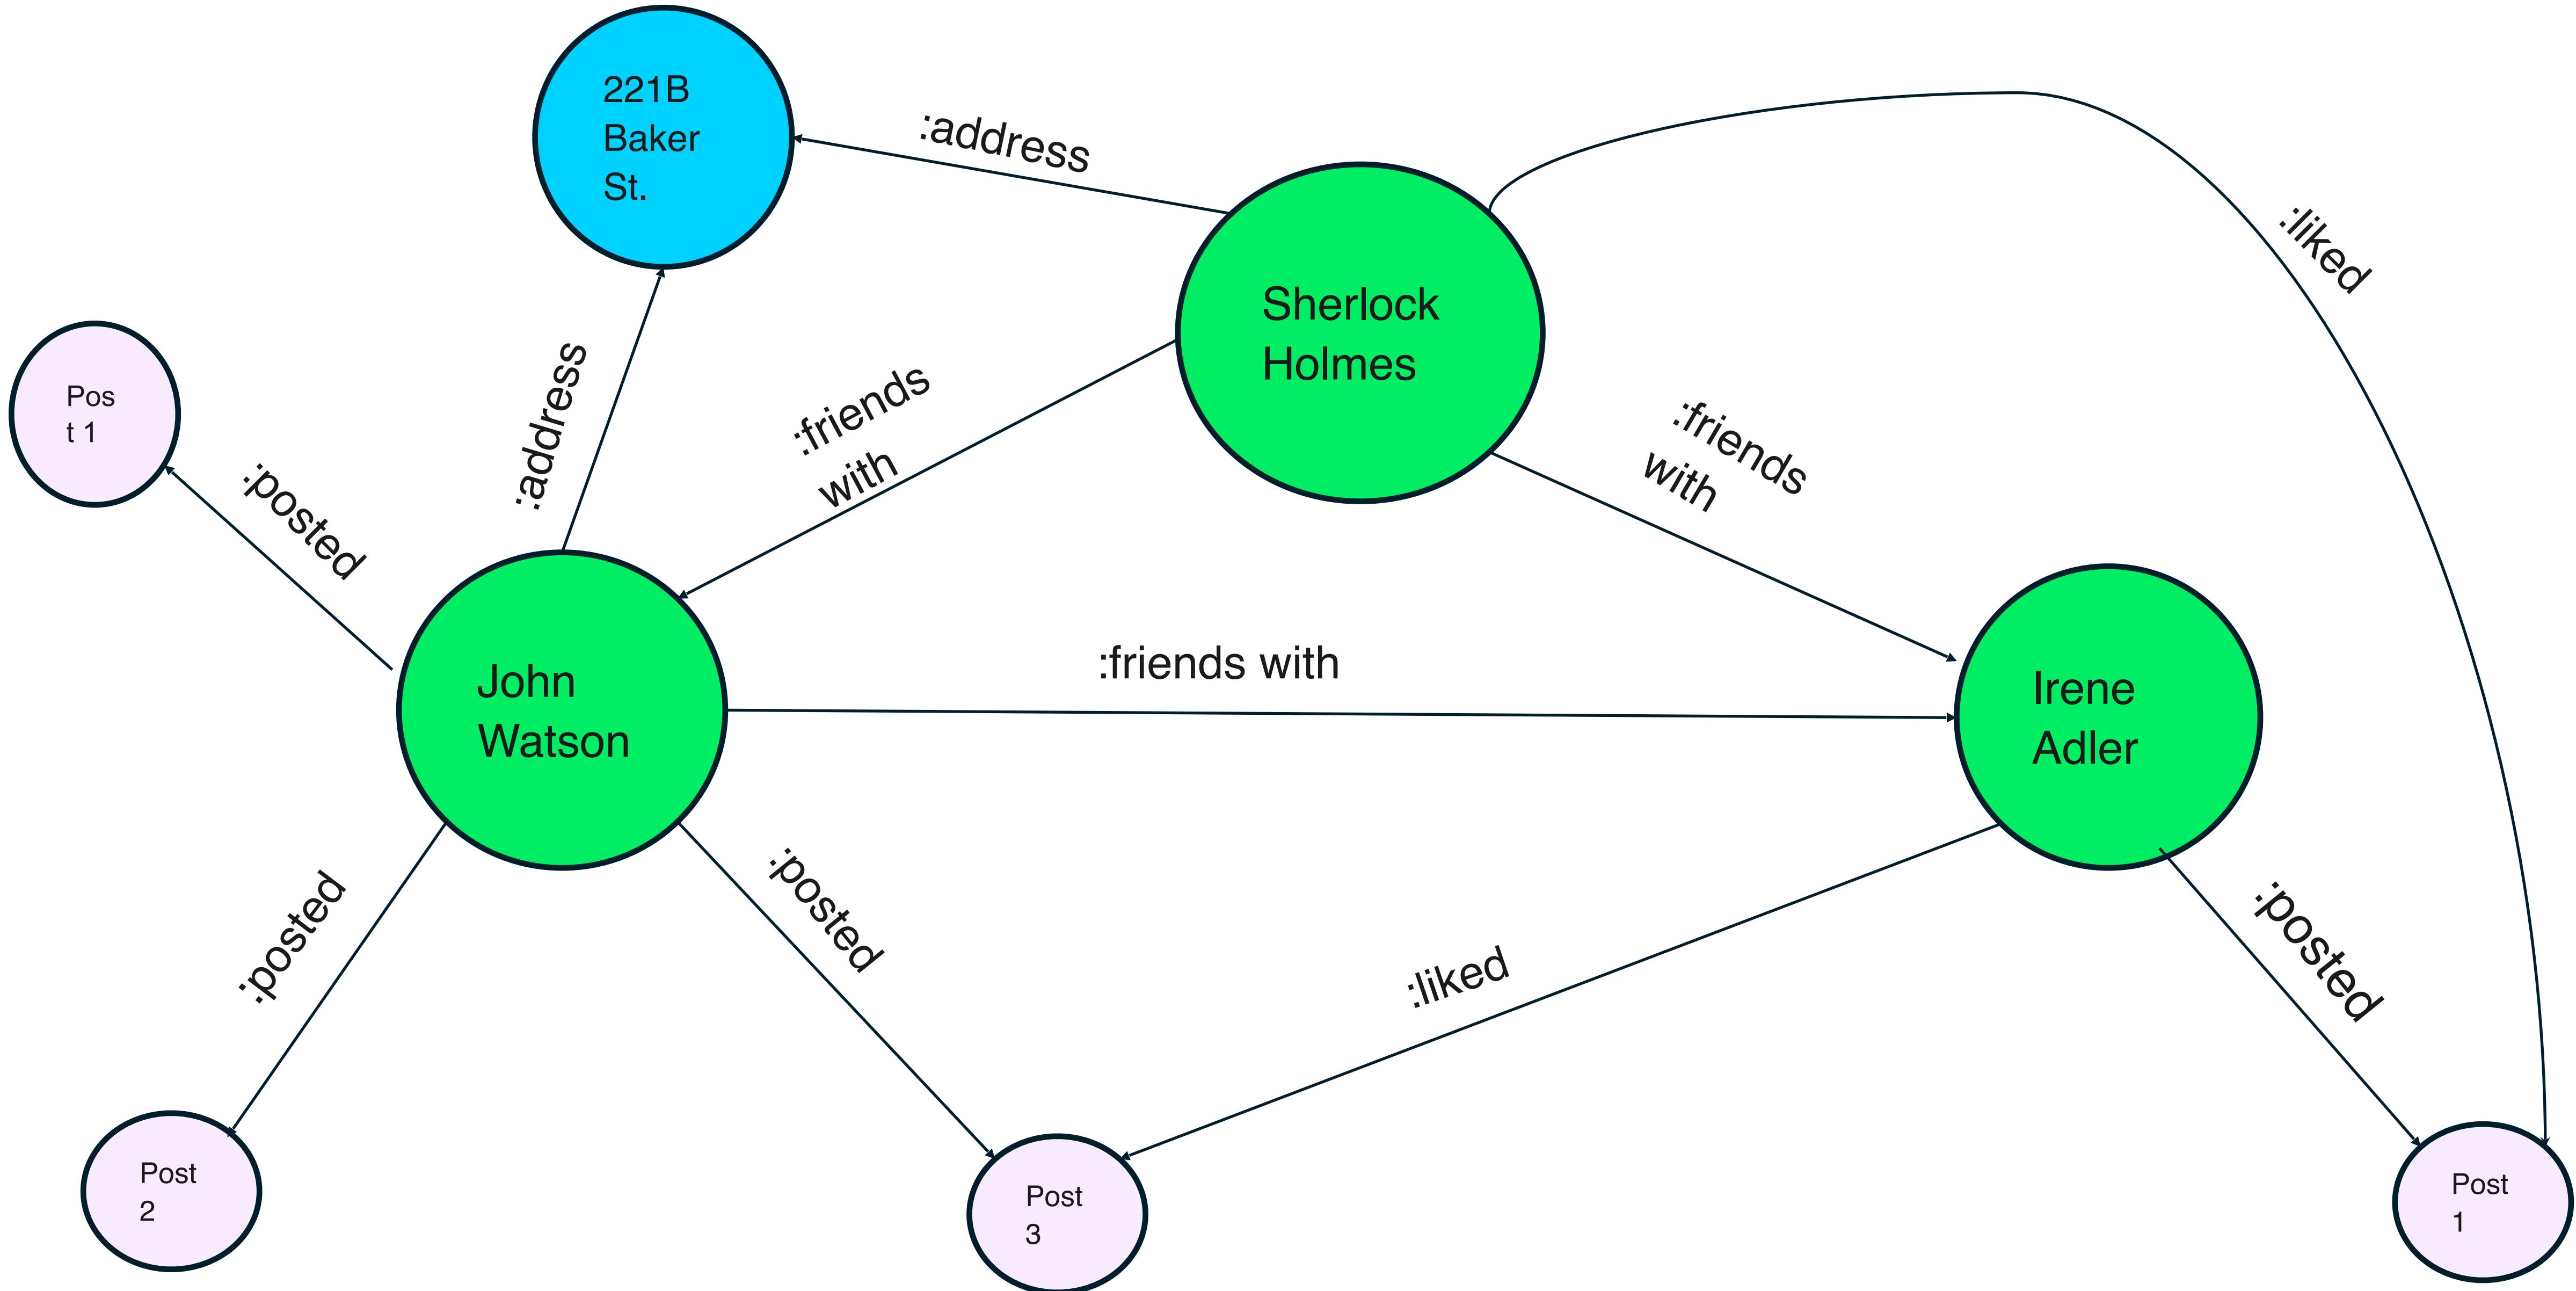




Structure

- Data is stored using key rows that can be associated with one or more dynamic columns

Strengths

- Highly performant queries
- Designed for analytics

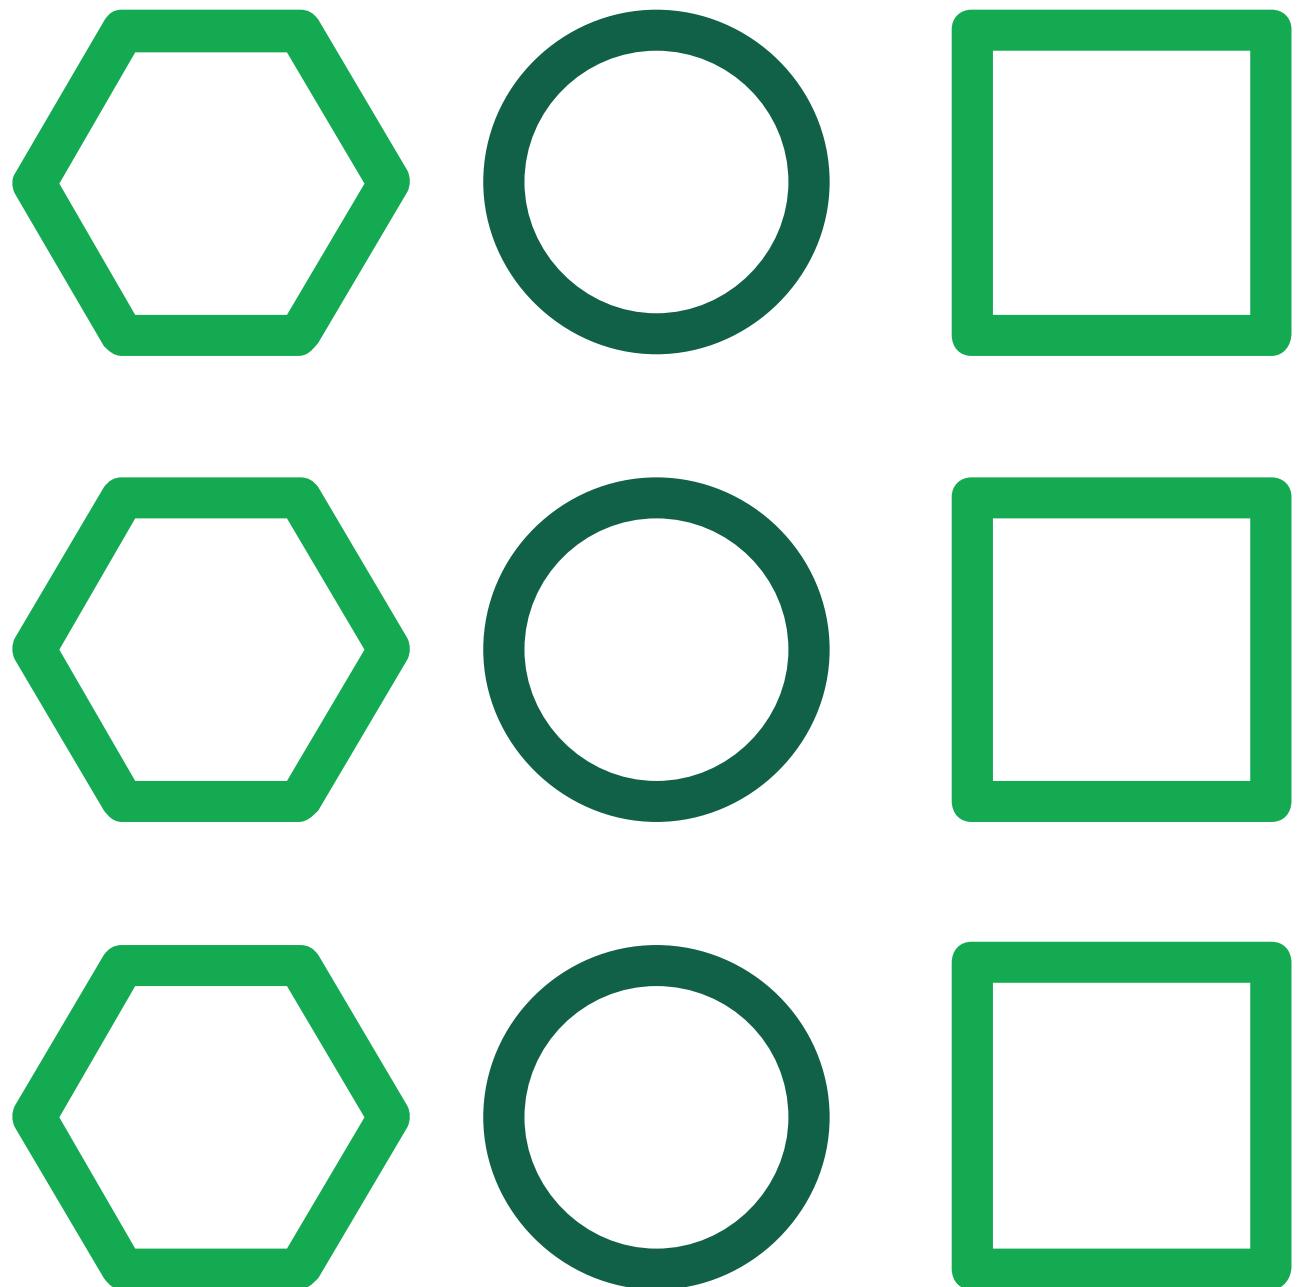

**Column Oriented
or Wide Column**



Column Oriented Example

Name	ID
Sherlock	001
John	002
Irene	003

Age	ID
40	001
45	002
43	003

Height	ID
6'2	001
5'9	002
5'7	003




Structure

- Polymorphic data models
- Each document contains markup that identifies fields and values

Strengths

- Obvious relationships using embedded arrays and documents
- No complex mapping

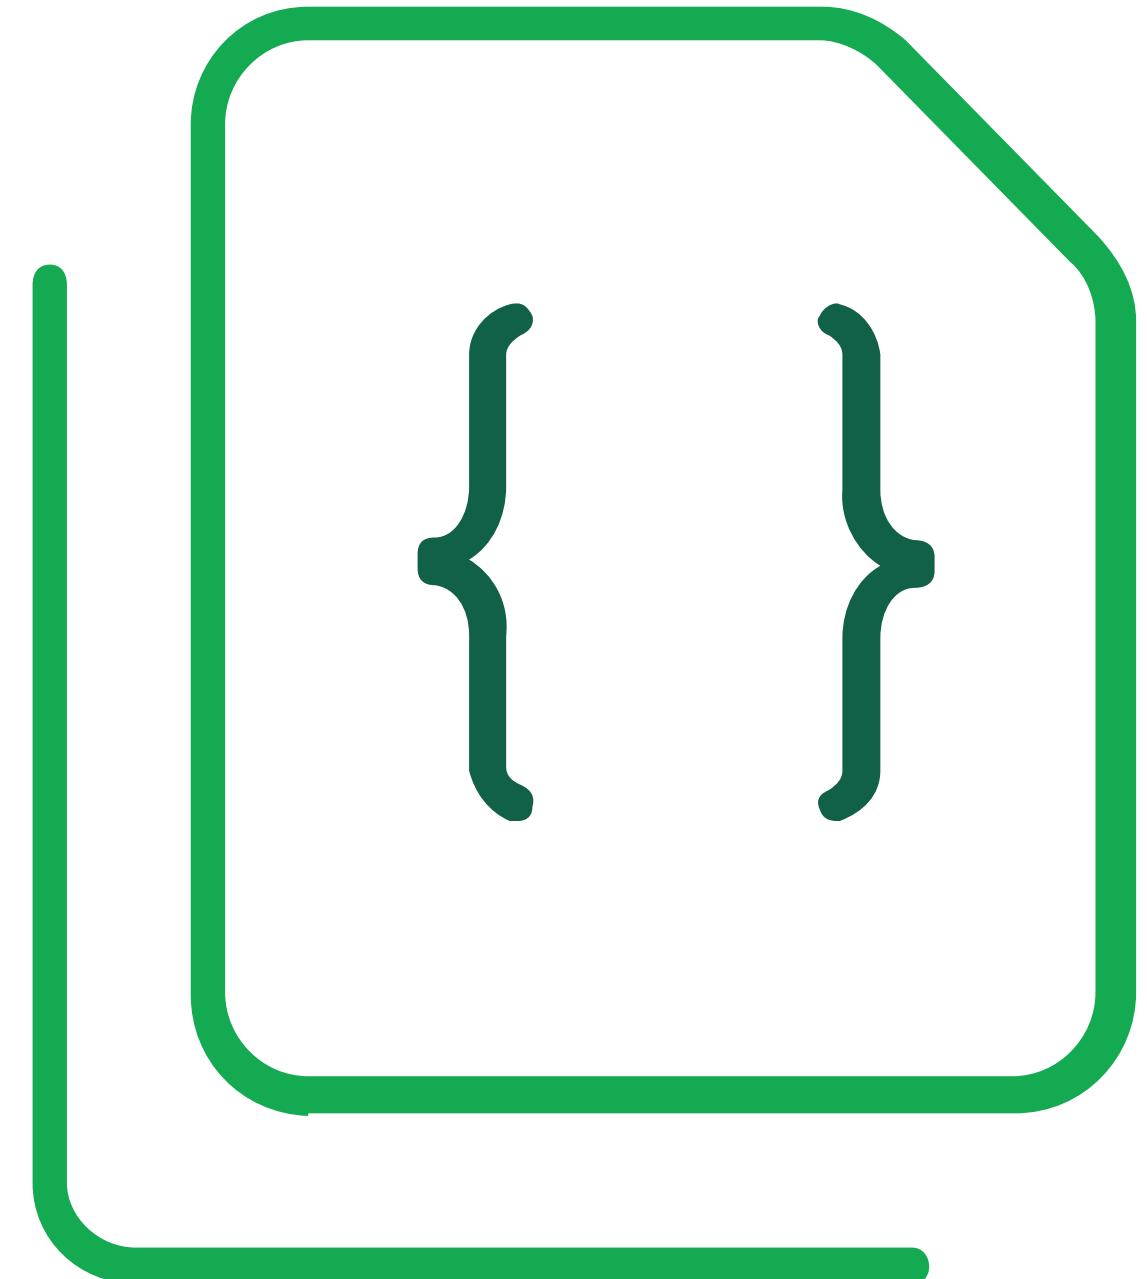

**Document
Database**


Document Model Example



```
{  
    "_id":  
        ObjectId("5ef2d4b45b7f11b6d7a"),  
    "user_id": "Sherlock  
Holmes",  
    "age": 40,  
    "address":  
        {  
            "Country": "England"  
            "City": "London",  
            "Street": "221B Baker St."  
        },  
    "Hobbies": [ violin, crime-  
solving ]  
},  
  
,  
{  
    "_id":  
        ObjectId("6ef8d4b32c9f12b6d4a"),  
    "user_id": "John Watson",  
    "age": 45,  
    "address":  
        {  
            "Country": "England"  
            "City": "London",  
            "Street": "221B Baker St."  
        },  
    "Medical license": "Active"  
}
```



The Document Model

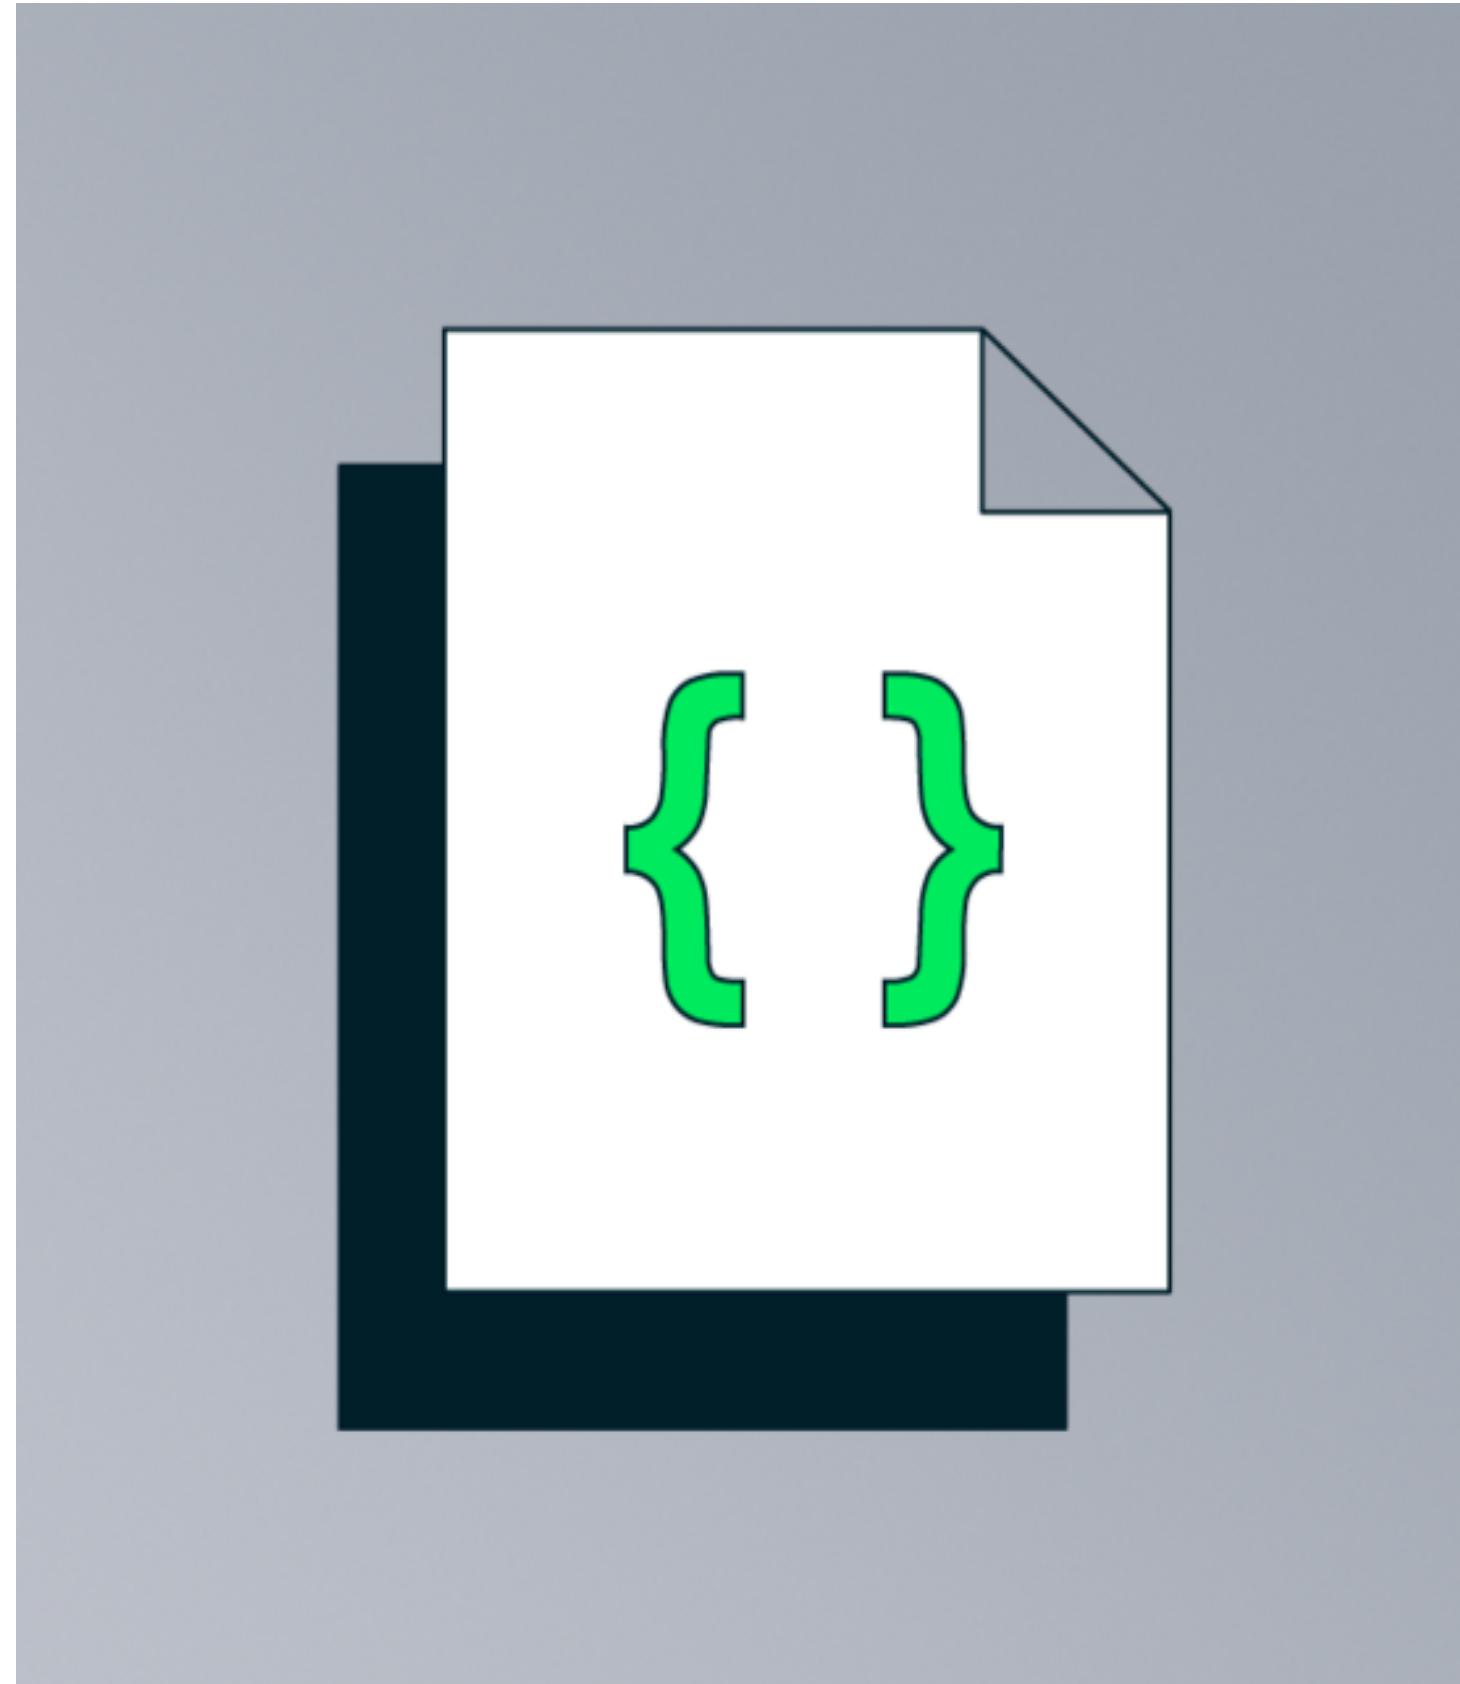

For general purpose use, the document model prevails as the preferred model by developers and database administrators.



The screenshot shows a code editor window with a dark theme. The title bar says "node-contacts". The left sidebar has various icons for file operations. The main area displays a JSON file with 34 lines of code. The JSON data represents a list of contacts, each with an "_id", "avatar", "first", "last", "twitter", and "notes" field. Some fields contain URLs. The code editor includes line numbers and a status bar at the bottom.

```
1 [  
2 {  
3   Edit Document  
4     "_id": "65a9581ca7bbcc10d23c9f86",  
5     "avatar": "https://sessionize.com/image/1940-400o400o2-Enh9dnYmrLYI",  
6     "first": "Glennnn",  
7     "last": "Reyes",  
8     "twitter": "@glnnrys",  
9     "notes": "",  
10    "favorite": true  
11 },  
12 {  
13   Edit Document  
14     "_id": "65a9581ca7bbcc10d23c9f88",  
15     "avatar": "https://sessionize.com/image/d14d-400o400o2-pyB229HyFPCr",  
16     "first": "Oscar",  
17     "last": "Newman",  
18     "twitter": "@oscarnewman"  
19 },  
20 {  
21   Edit Document  
22     "_id": "65a9581ca7bbcc10d23c9f90",  
23     "avatar": "https://sessionize.com/image/2694-400o400o2-MYYTsnszbLK",  
24     "first": "Andrew",  
25     "last": "Petersen"  
26 },  
27 {  
28   Edit Document  
29     "_id": "65a9581ca7bbcc10d23c9f9f",  
30     "avatar": "https://sessionize.com/image/c73a-400o400o2-4MTaTq6ftC1",  
31     "first": "Monica",  
32     "last": "Powell",  
33     "twitter": "@indigitalcolor"  
34 },  
35 {  
36   Edit Document  
37     "_id": "65a9581ca7bbcc10d23c9f87",  
38     "avatar": "https://sessionize.com/image/9273-400o400o2-3tyrUE3HjsCh",  
39     "first": "Ryan",  
40 }
```

It's just JSON


- Or in fact, BSON.
- BSON stands for Binary JSON.
- It is a binary-encoded serialization format.
- Designed for efficiency in space and processing compared to plain text JSON.
- Associated with MongoDB as the primary data storage format.
- Includes additional data types like binary data and a richer set of numeric types.
- Suitable for representing complex data structures in a binary form.

Collections and Documents






Document

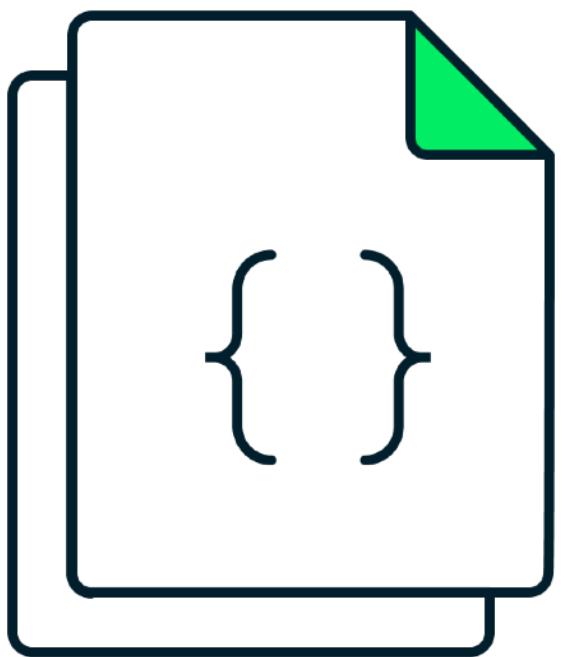


Collection

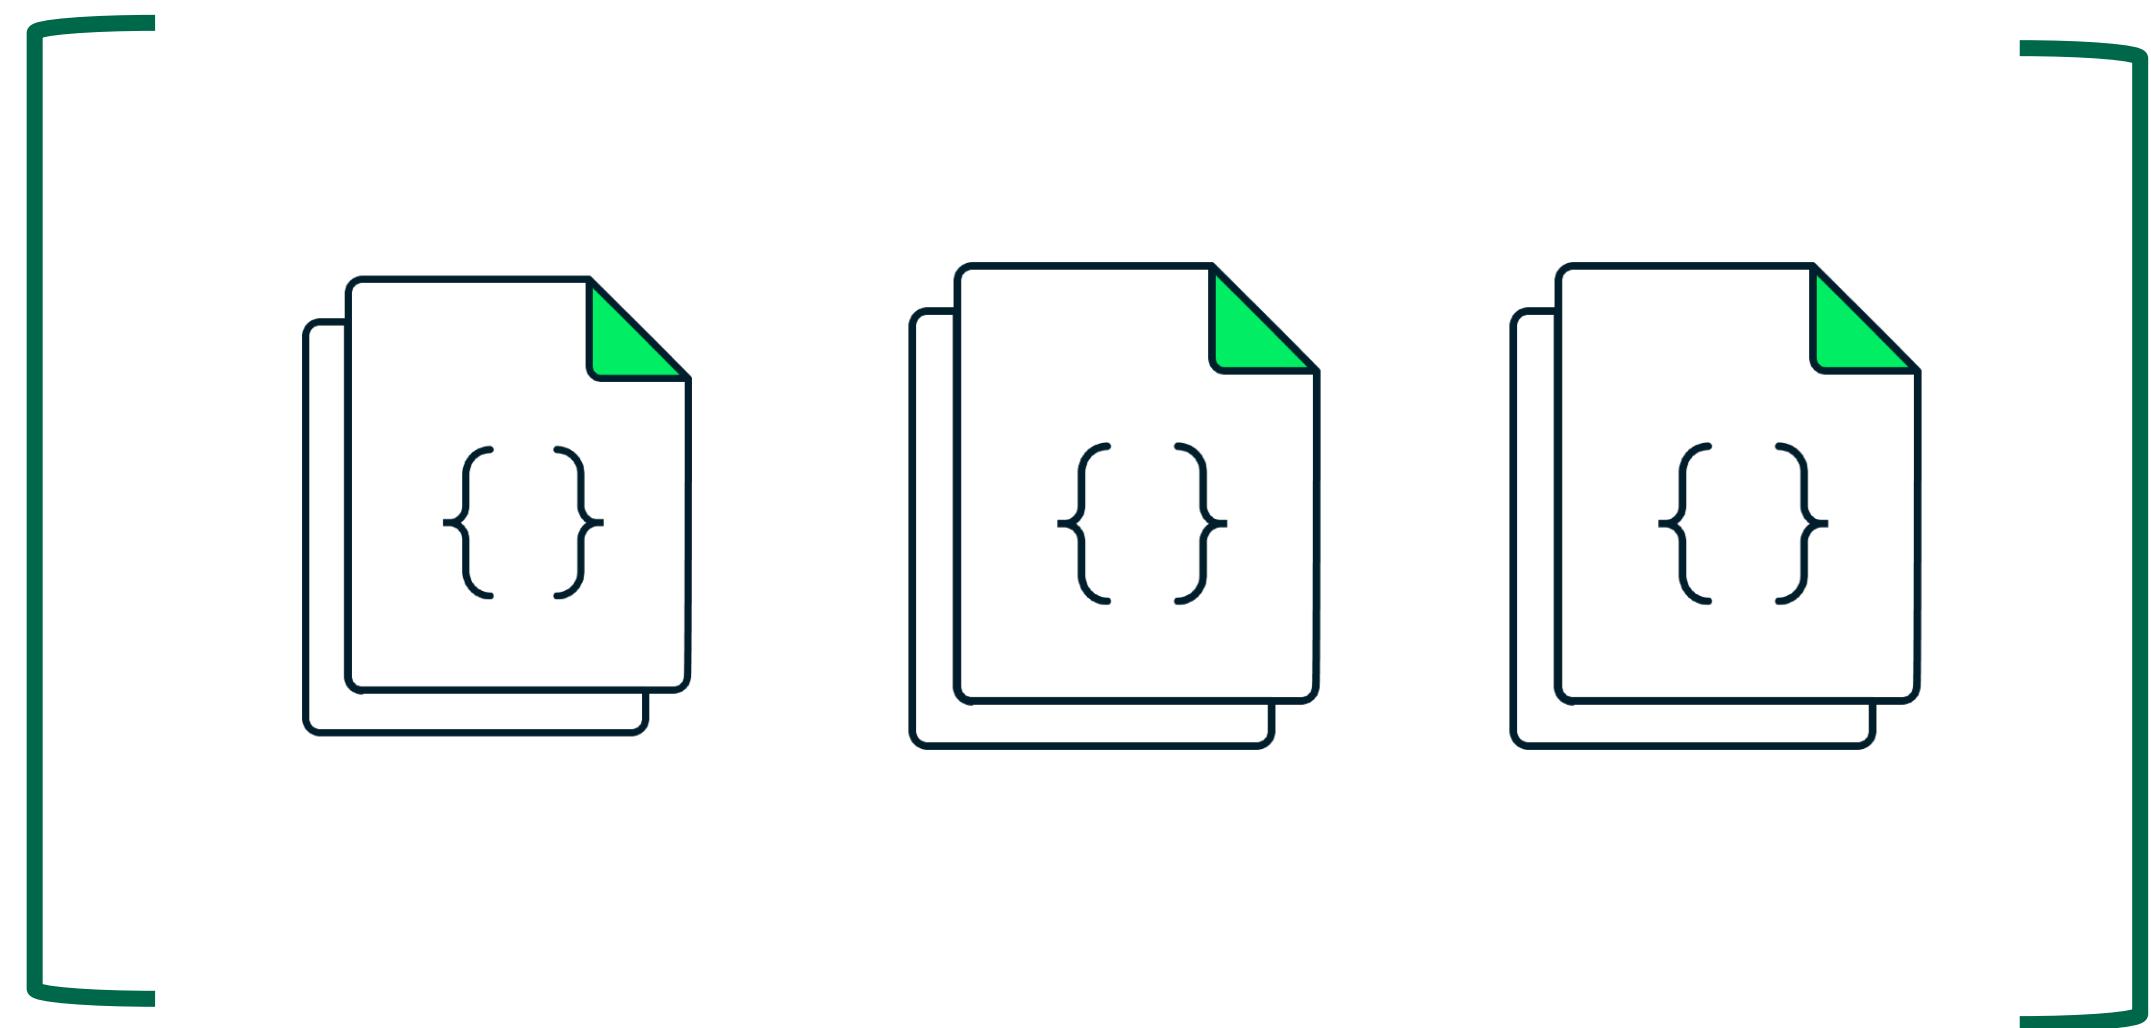


A way to organize and store data as a set of field-value pairs in MongoDB.

An organized store of documents in MongoDB, usually with common fields between documents


Collection

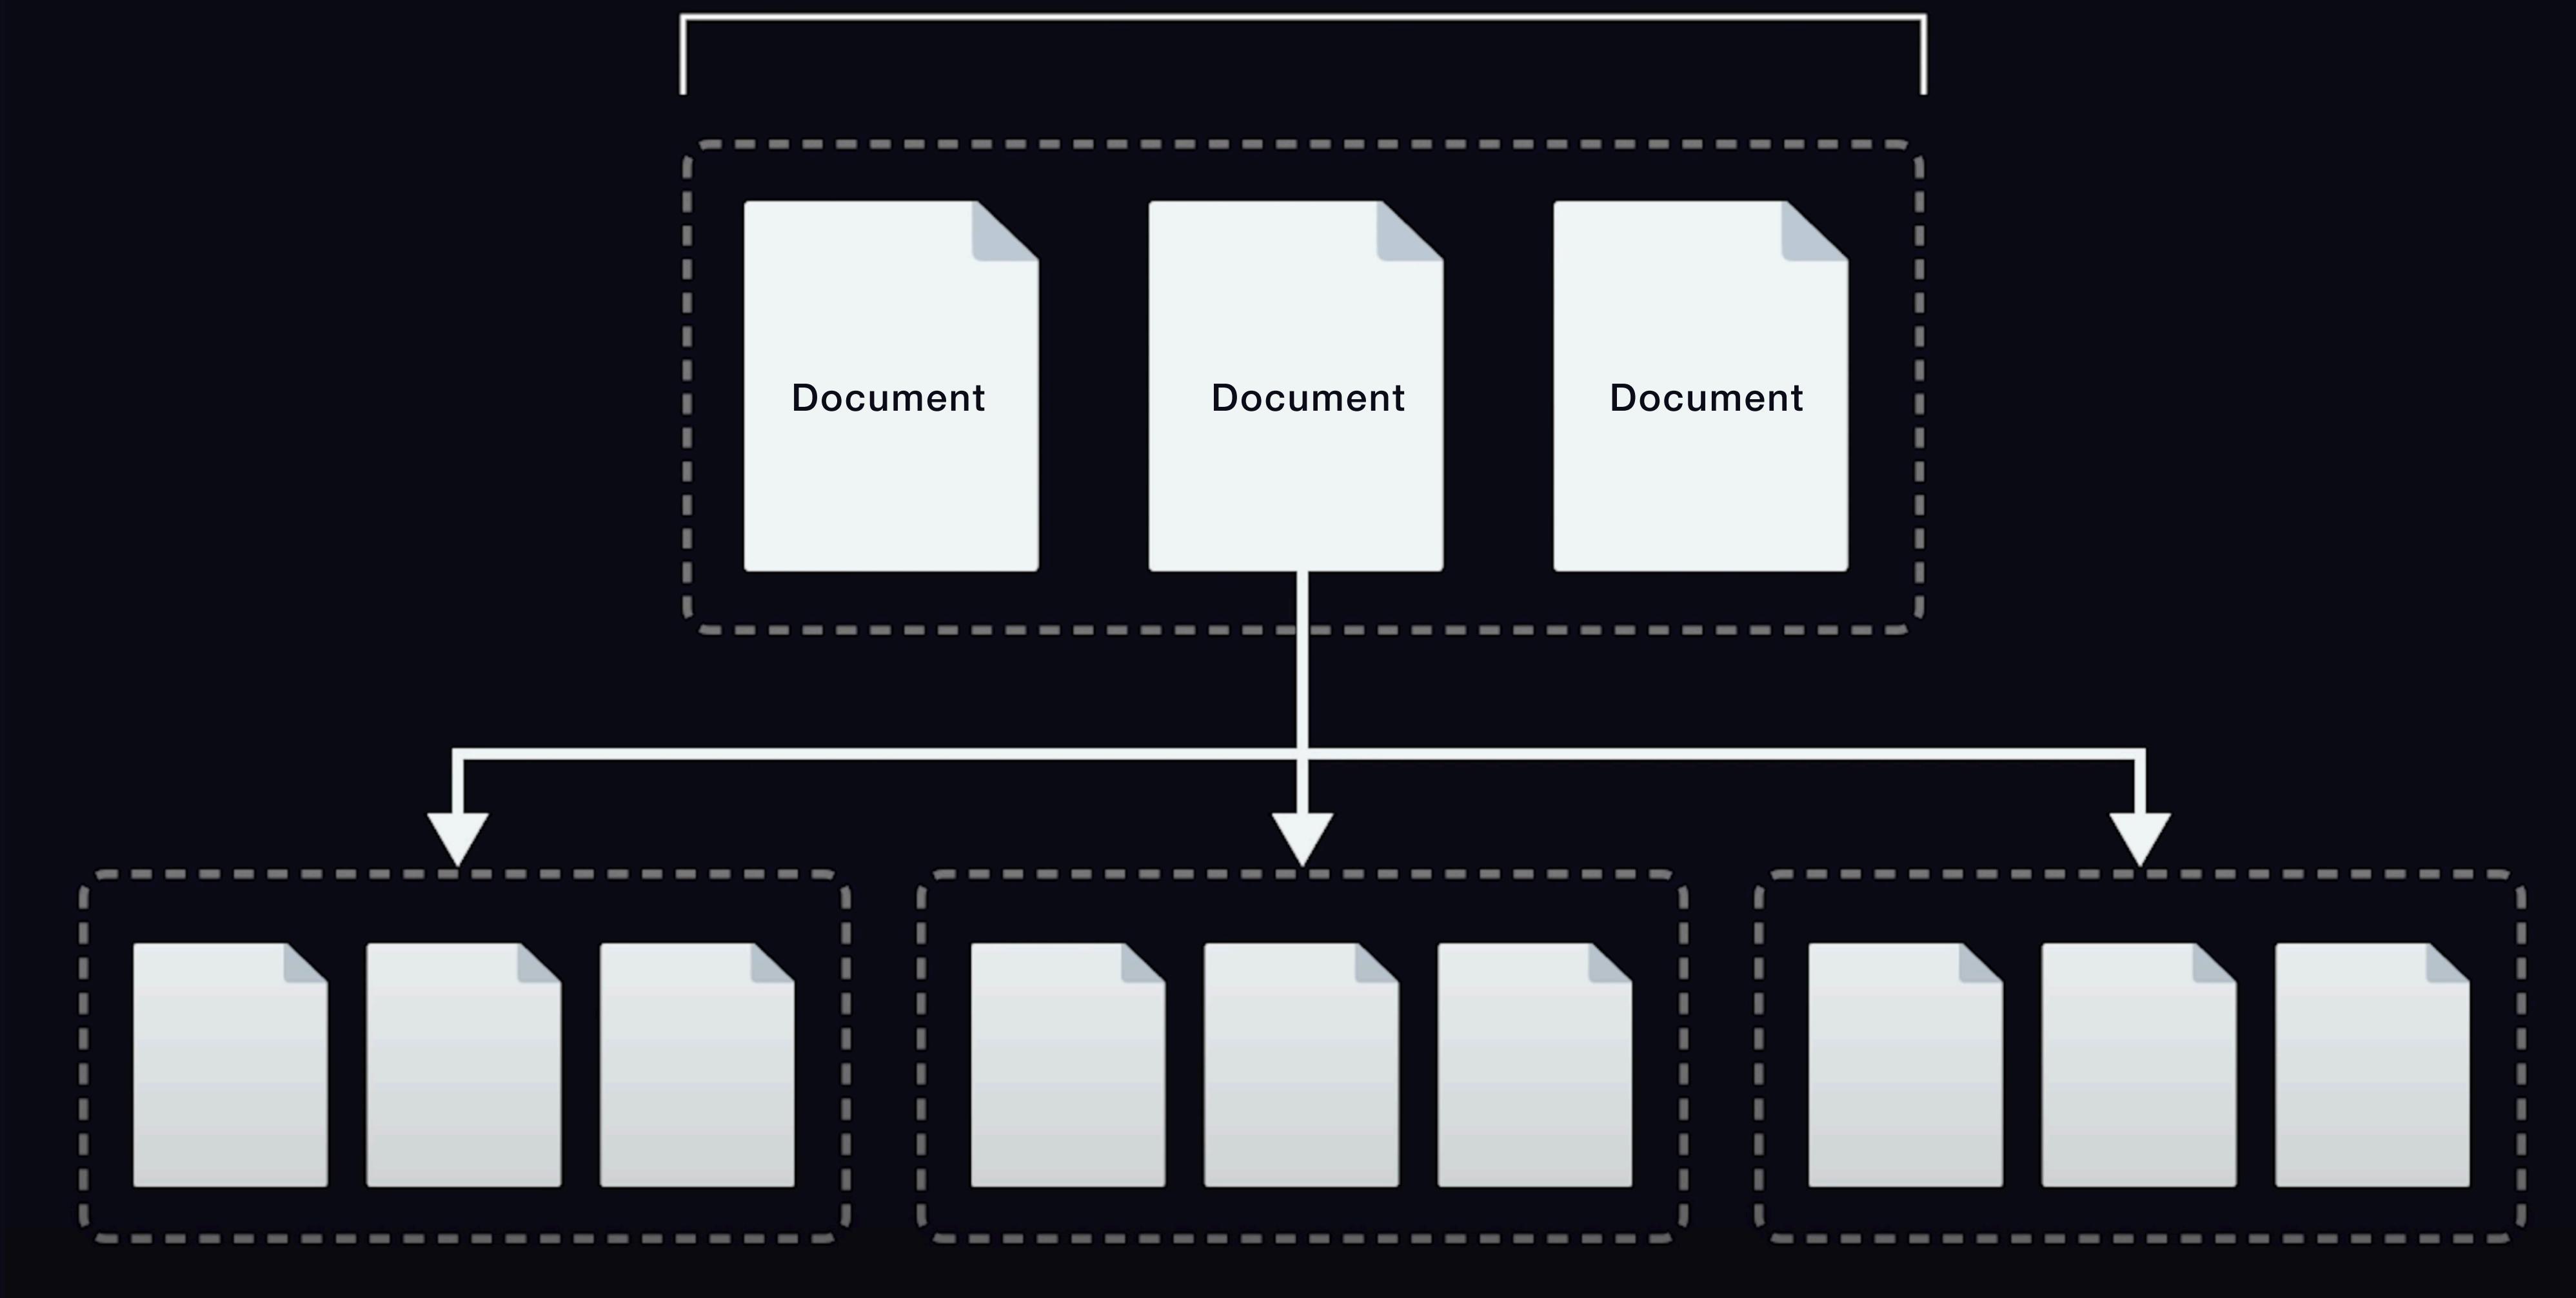

Collections and Documents

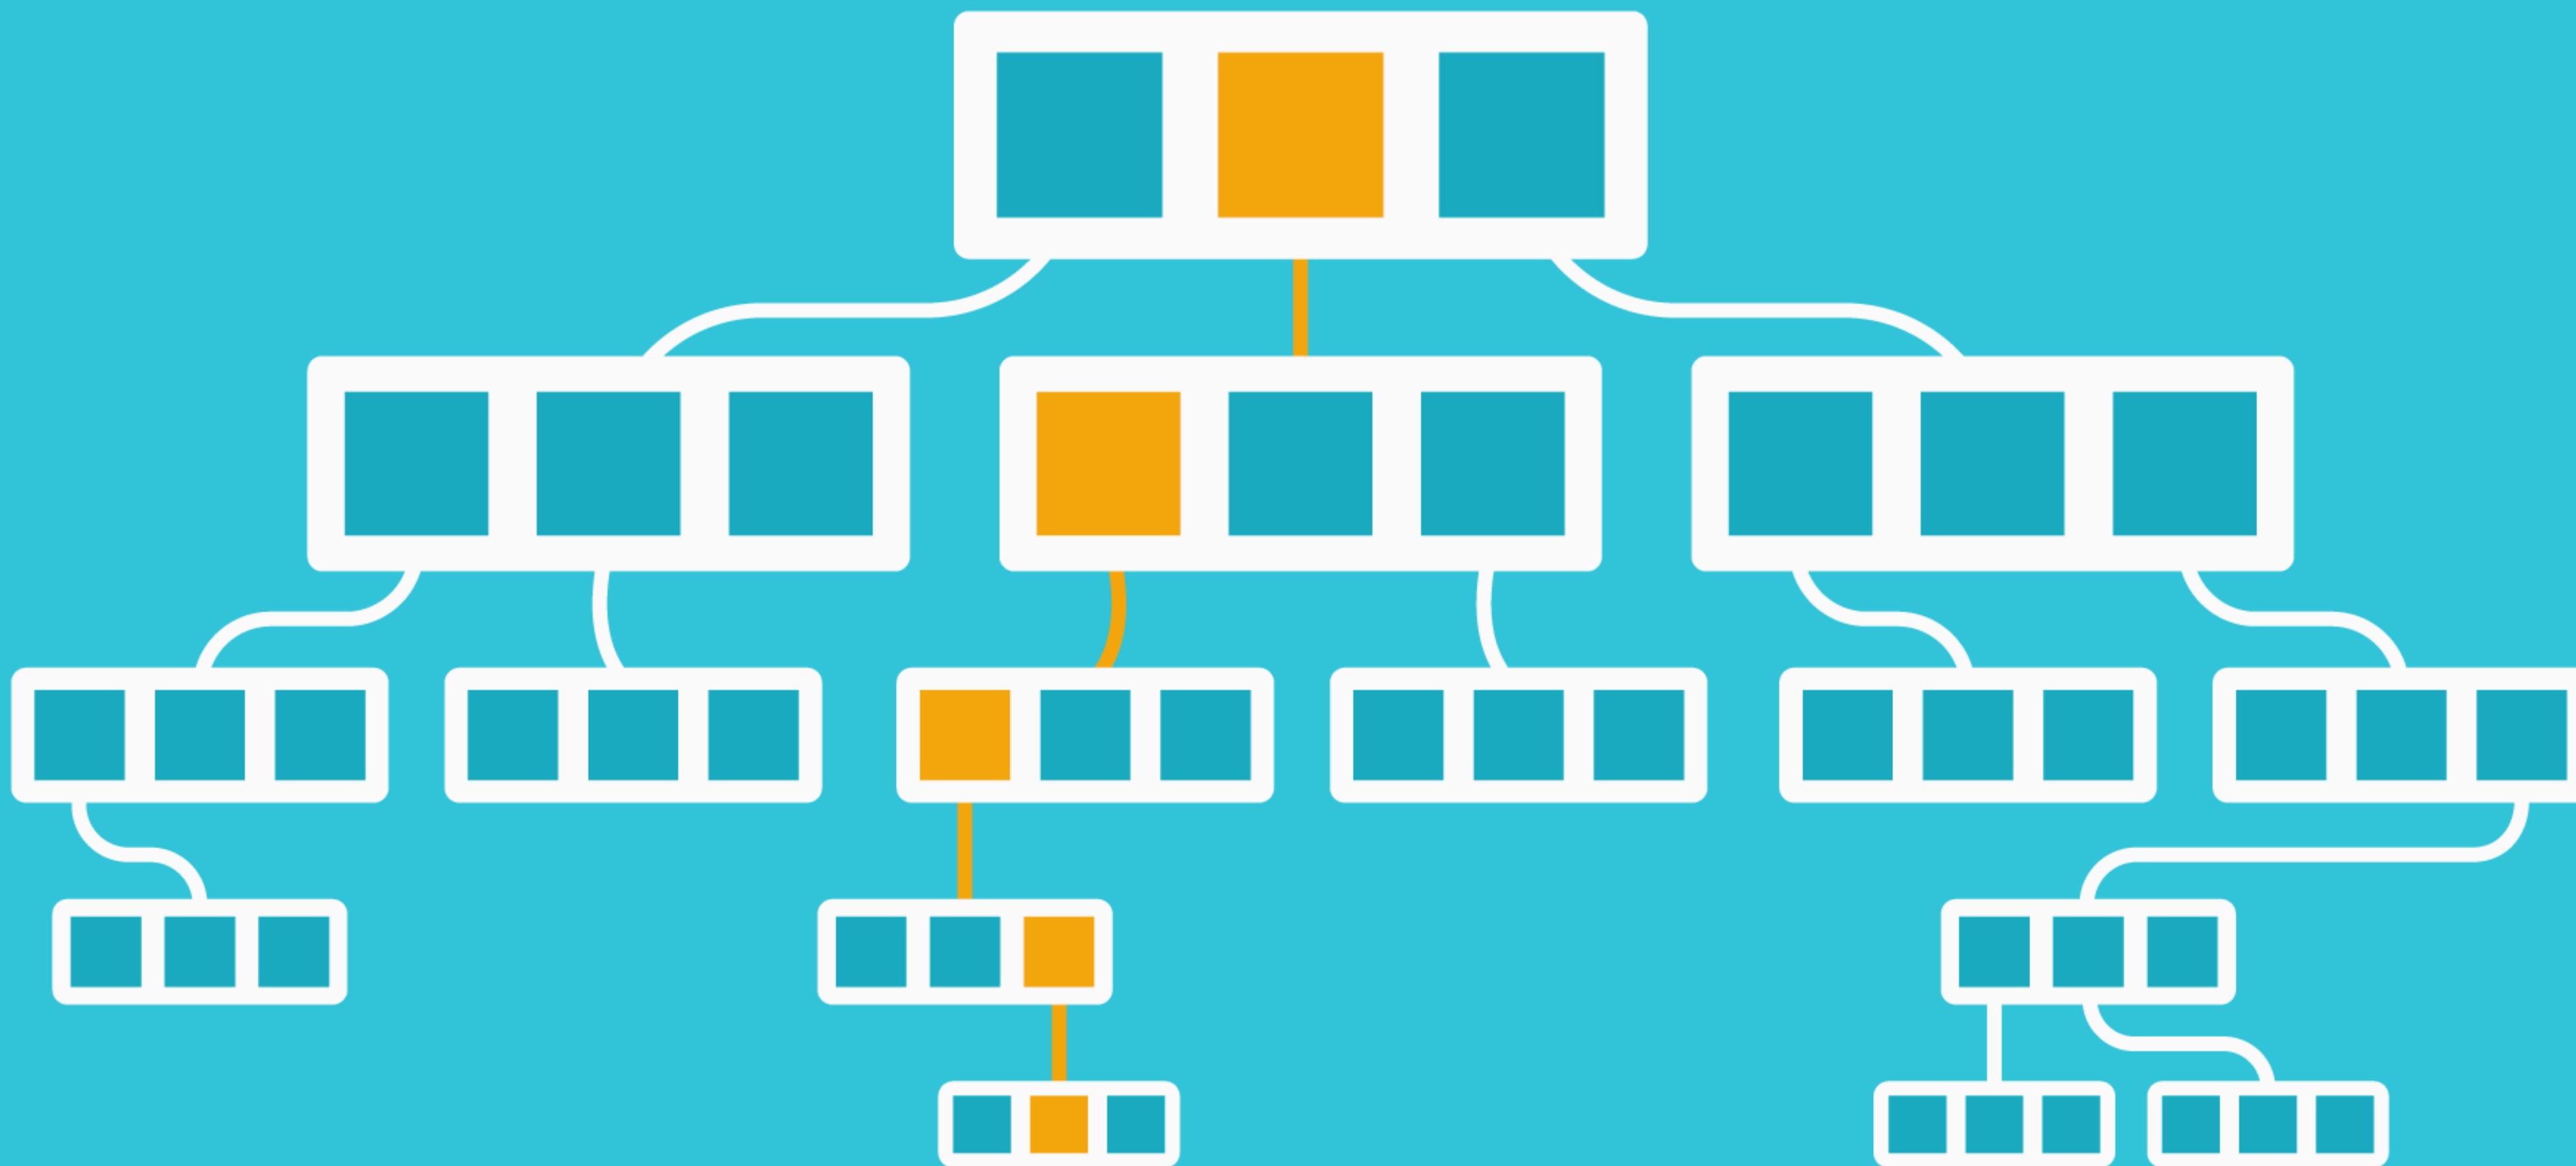

Collections and Documents

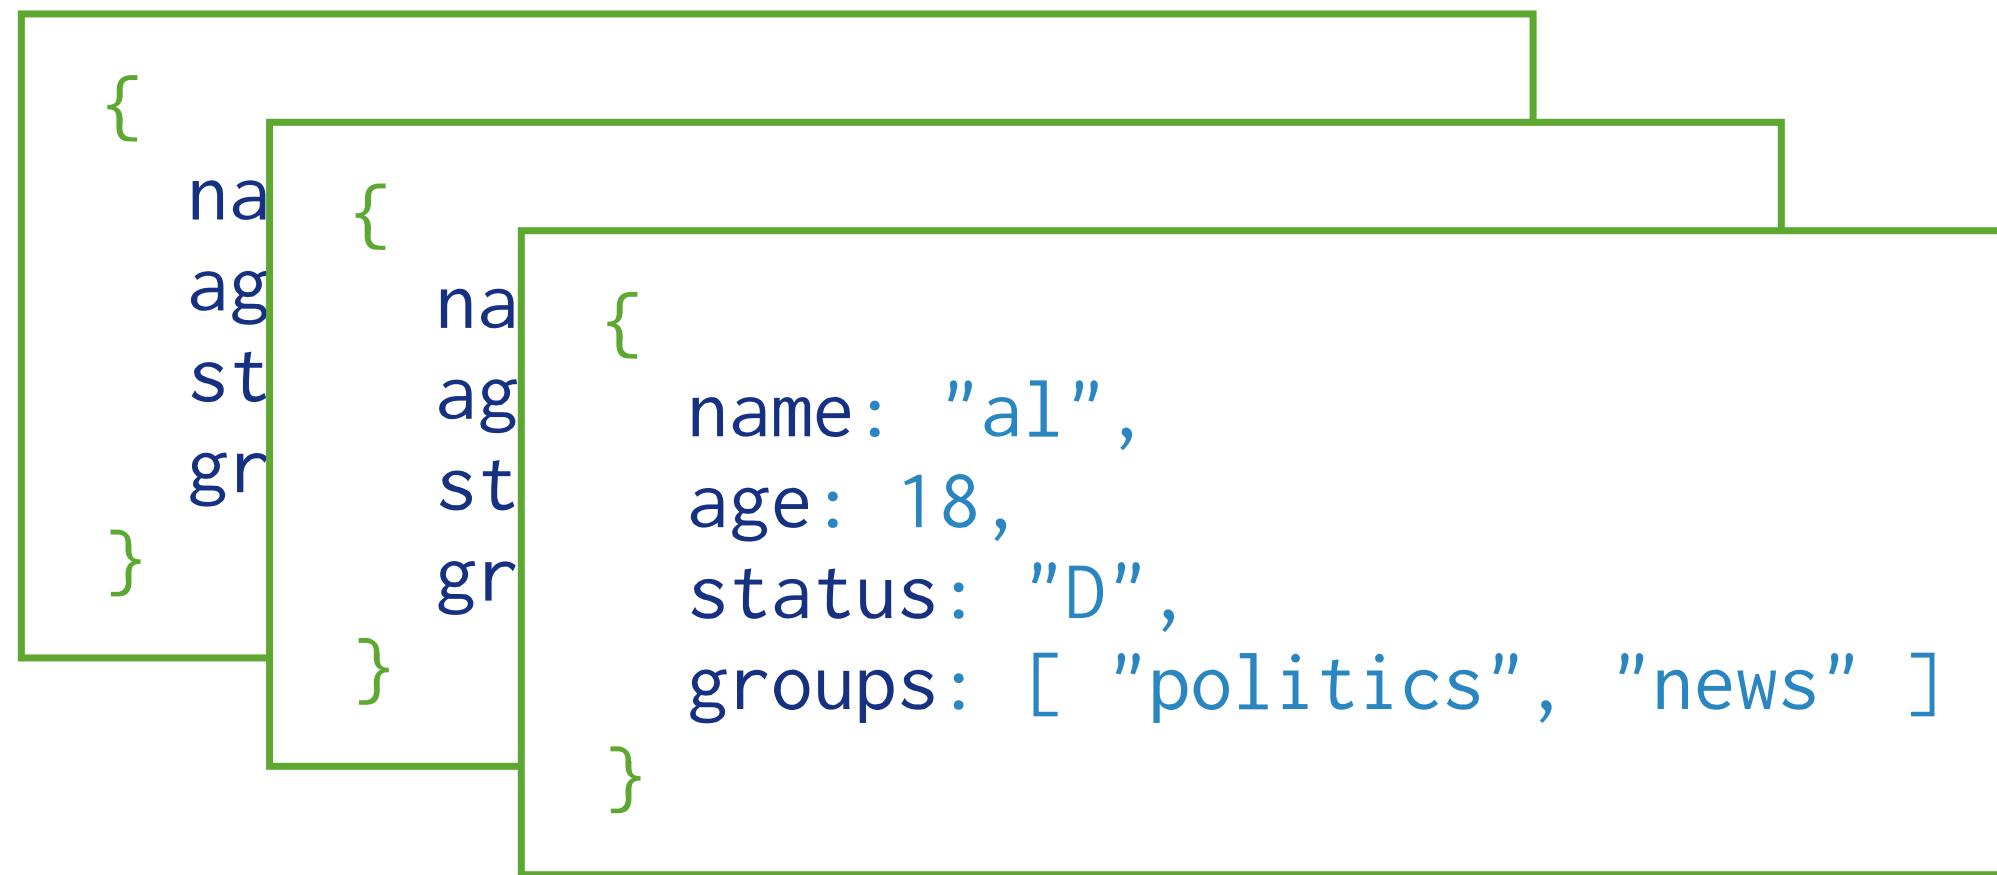


Collection

```
{  
  name: "sue",  
  age: 26,  
  status: "A",  
  groups: [ "news", "sports" ]  
}
```

← field: value
← field: value
← field: value
← field: value

Document

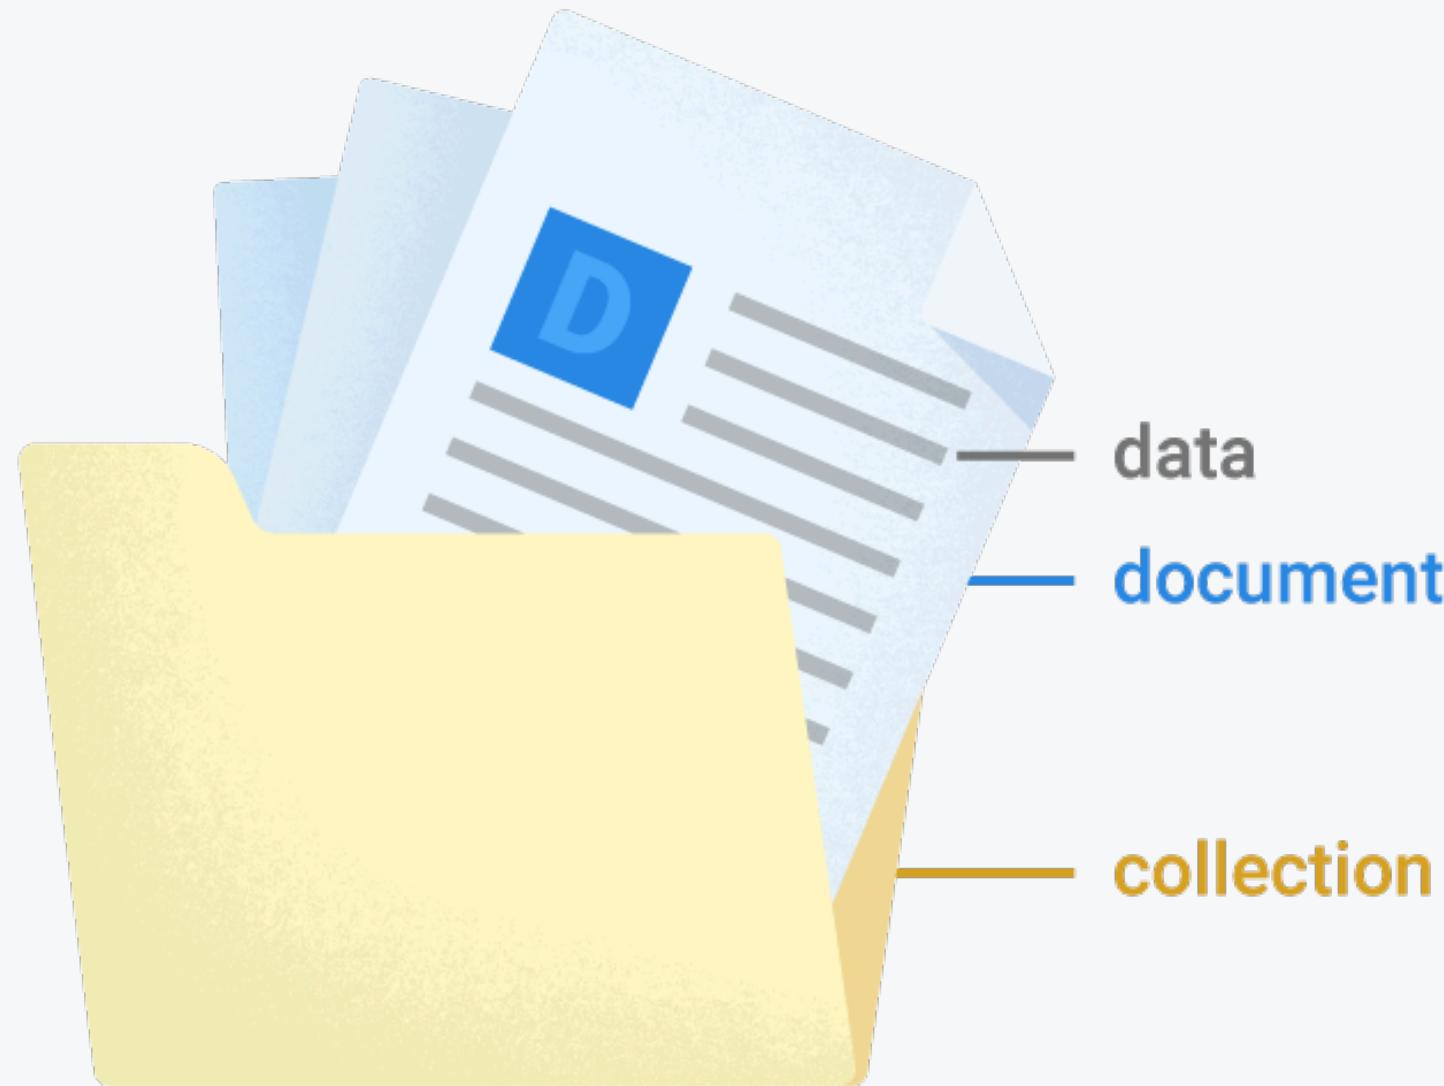

Home > users > seme0qoWIzQh...

mdu-e18front	users	seme0qoWIzQhZDfI1m0L
+ Start collection	+ Add document	+ Start collection
users >	IS35ivFQ0BBYr0bwZX7k cNzvoH8XSRib6XXiUYuX seme0qoWIzQhZDfI1m0L >	+ Add field mail: "bki@eaaa.dk" name: "Birgitte"

Collection & document vs array & object



Properties
Object

data

document

collection

Array

```
const users = [  
  {  
    id: 1,  
    name: "Rasmus Cederdorff",  
    title: "Senior Lecturer",  
    mail: "race@eaaa.dk",  
    image: "https://share.cederdorff.com/images/race.jpg"  
  },  
  {  
    id: 2,  
    name: "Anne Kirketerp",  
    title: "Head of Department",  
    mail: "anki@eaaa.dk",  
    image: "https://www.eaaa.dk/media/5buh1xeo/anne-kirke"  
  },  
  {  
    id: 3,  
    name: "Murat Kilic",  
    title: "Senior Lecturer",  
    mail: "mki@eaaa.dk",  
    image: "https://www.eaaa.dk/media/llyavasj/murat-kili"  
  }  
];
```

```
1  {
2      "first_name": "Paul",
3      "surname": "Miller",
4      "cell": "447557505611",
5      "city": "London",
6      "location": [45.123, 47.232],
7      "profession": ["banking", "finance", "trader"],
8      "cars": [
9          {
10             "model": "Bentley",
11             "year": 1973
12         },
13         {
14             "model": "Rolls Royce",
15             "year": 1965
16         }
17     ]
18 }
```

The Document Model and MongoDB






What is MongoDB in 5 Minutes




https://www.youtube.com/watch?v=EE8ZTQxa0AM&ab_channel=MongoDB




Key Features

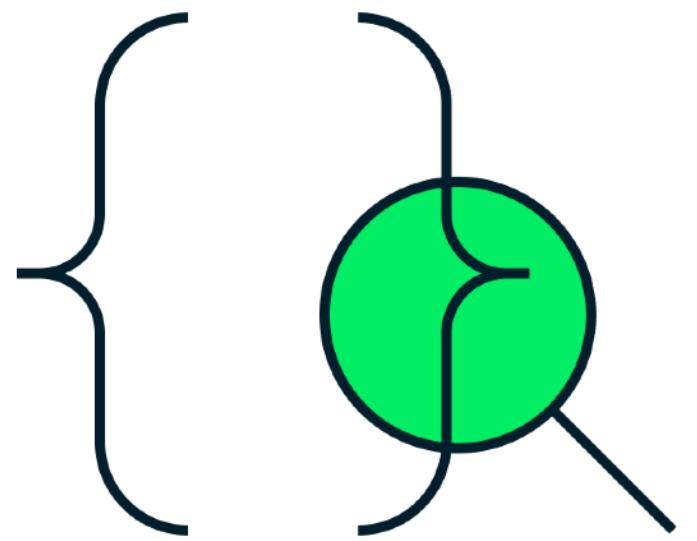


API query or query language

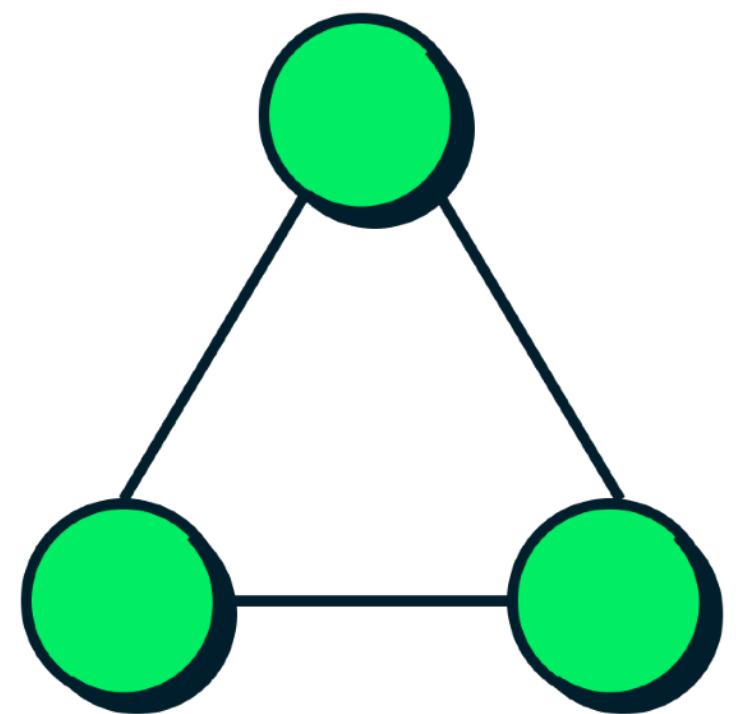

Distributed and resilient

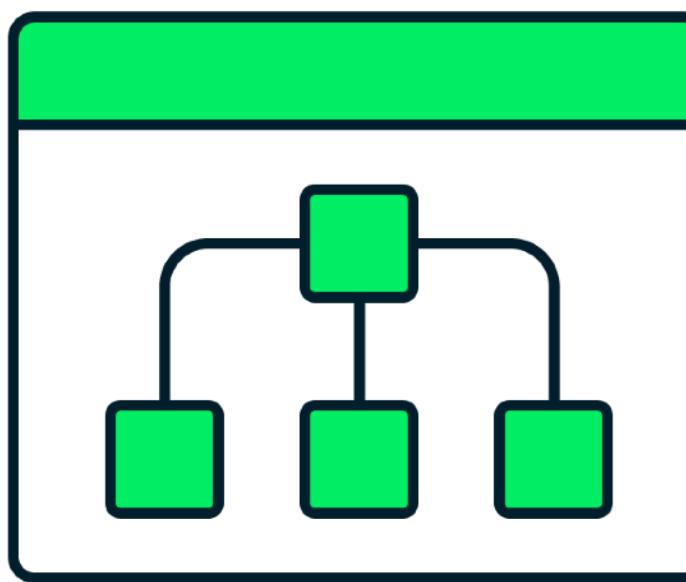

Flexible schema

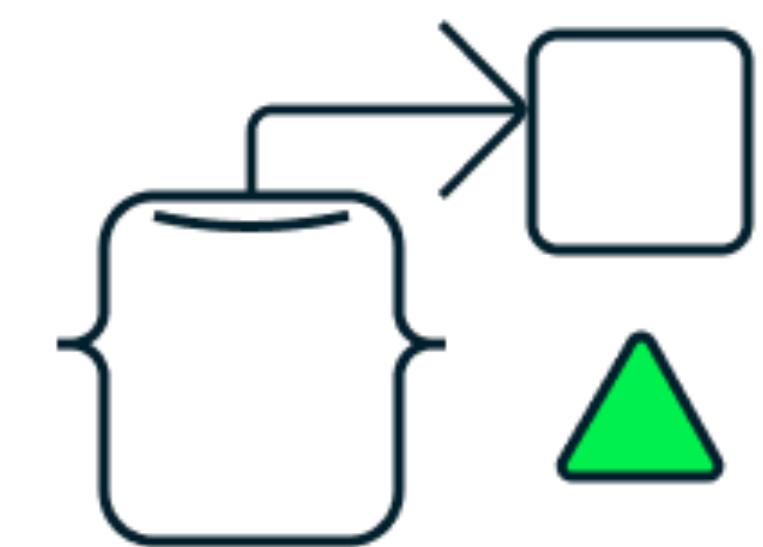

Object mapping



```
{  
  "_id": ObjectId(  
    "5f4f7fef2d4b45b7f11b6d7a") ,  
  "user_id": "Sean",  
  "age": 29,  
  "Status": "A"  
}
```

The Document Model: Structure and Syntax

- To the left is an example of a document representing a user details including `user_id`, `age`, and a status `category`.



```
{  
  "_id": ObjectId(  
    "5f4f7fef2d4b45b7f11b6d7a") ,  
  "user_id": "Sean",  
  "age": 29,  
  "Status": "A"  
}
```

The Document Model: Structure and Syntax

- A document in MongoDB uses the JavaScript Object Notation (JSON) format.
- This format uses curly brackets to mark the start and the end of the document.



```
{  
  "_id": ObjectId(  
    "5f4f7fef2d4b45b7f11b6d7a" ),  
  "user_id": "Sean",  
  "age": 29,  
  "Status": "A"  
}
```

The Document Model: Structure and Syntax

- MongoDB refers to keys as fields.
- The field-values within a pair in a document are separated by colons (:).



```
{  
  "_id": ObjectId(  
    "5f4f7fef2d4b45b7f11b6d7a" ),  
  "user_id": "Sean",  
  "age": 29,  
  "Status": "A"  
}
```

The Document Model: Structure and Syntax

- Each field must be enclosed within quotation marks. String values are often quoted as good practice.



```
{  
  "_id": ObjectId(  
    "5f4f7fef2d4b45b7f11b6d7a" ),  
  "user_id": "Sean",  
  "age": 29,  
  "Status": "A"  
}
```

The Document Model: Structure and Syntax


- Each field-value pair is separated within the document by commas.




Collections in the Document Model



Document

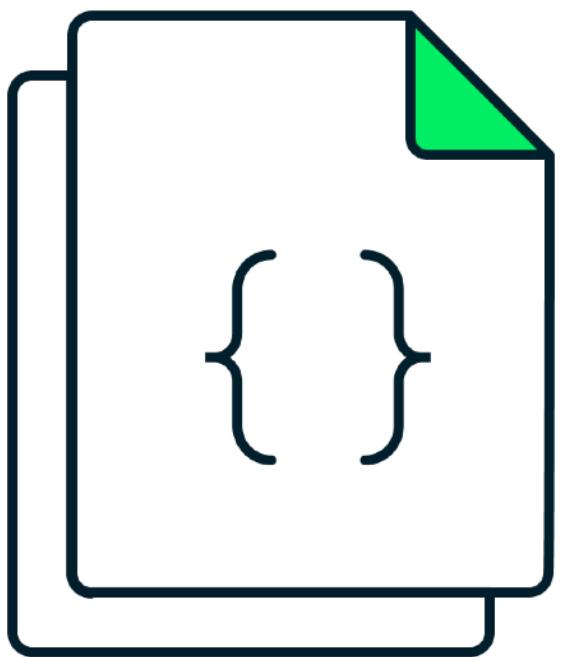

Collection

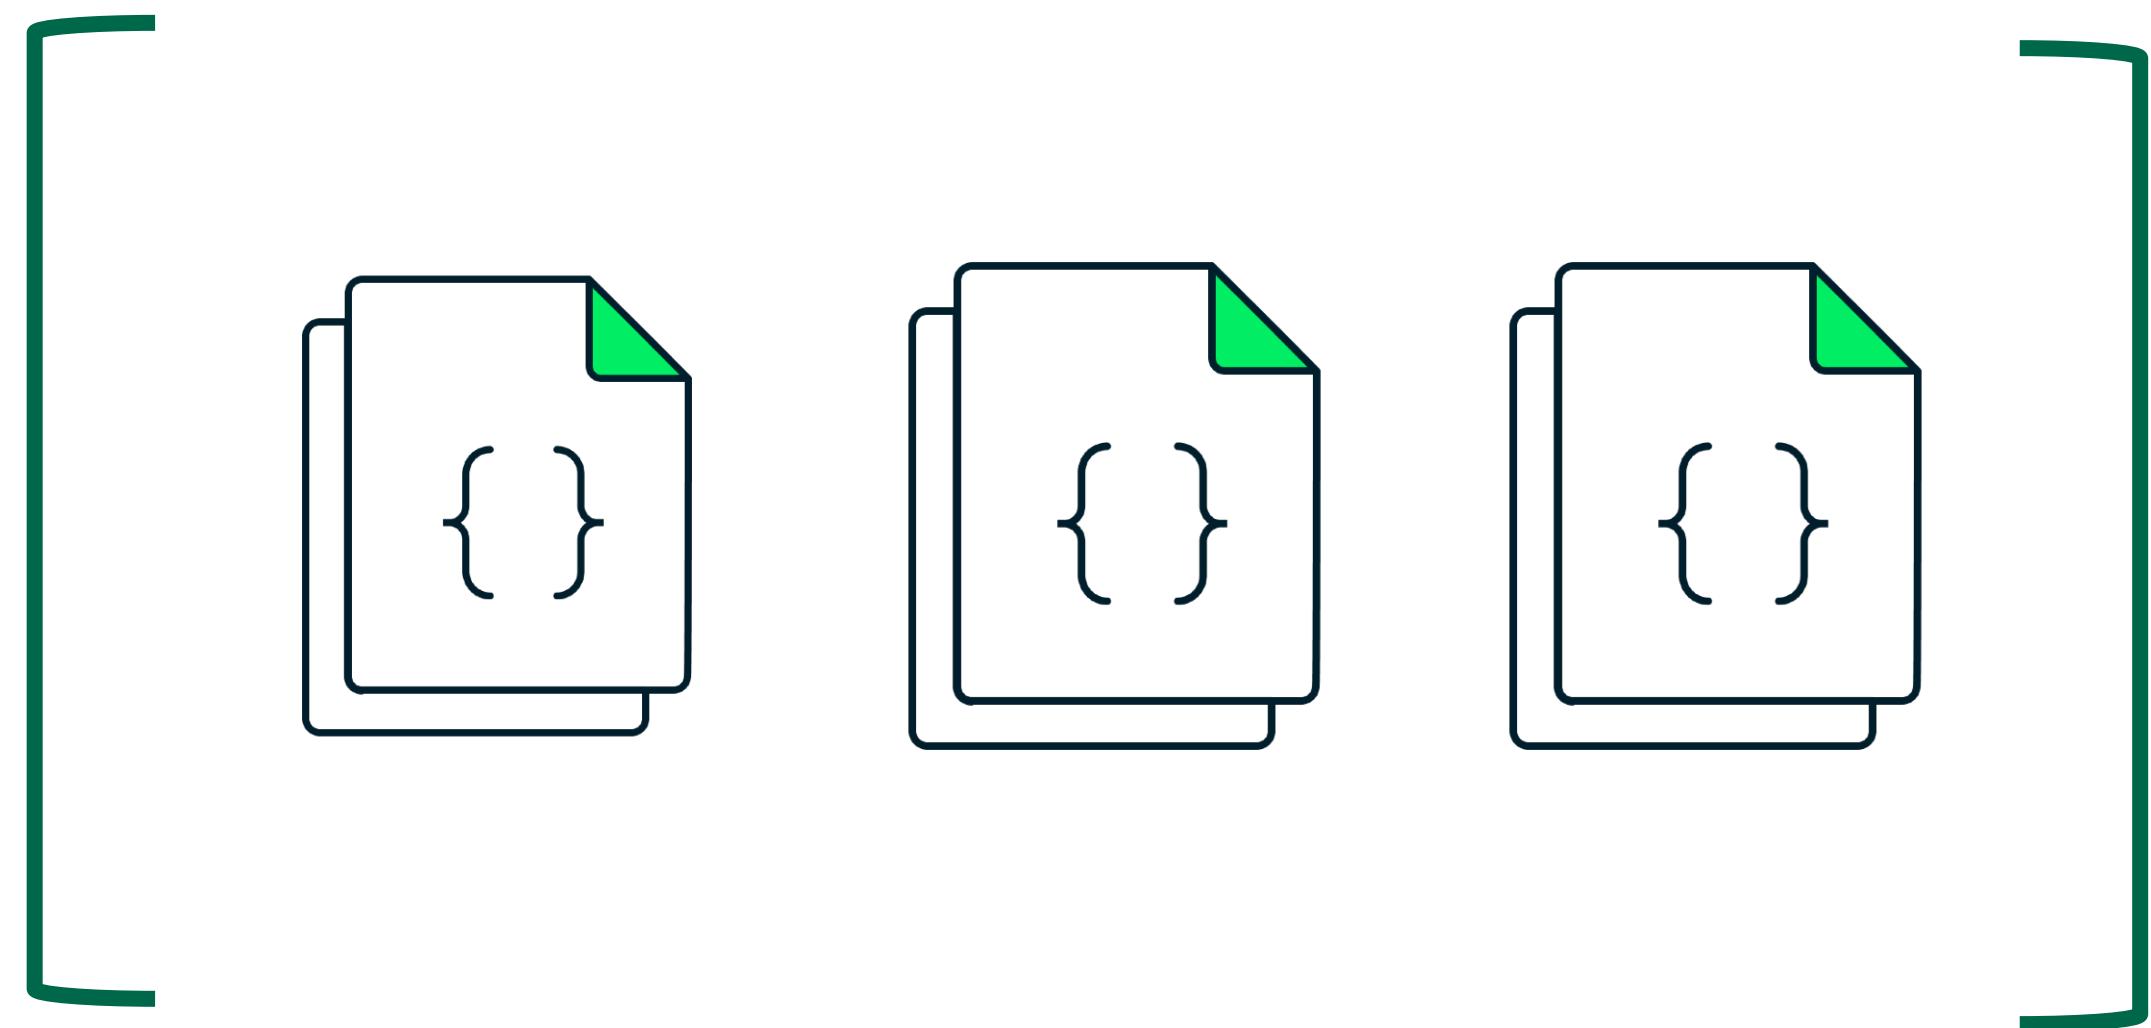

A way to organize and store data as a set of field-value pairs in MongoDB.

An organized store of documents in MongoDB, usually with common fields between documents



Example

Two documents in the same collection
but with different fields...

```
{  
  "_id": ObjectId(  
    "5f4f7fef2d4b45b7f11b6d7a") ,  
  "user_id": "Sean",  
  "age": 29,  
  "Status": "A"  
}
```

```
{  
  "_id": ObjectId(  
    "5f4f7fef2d4b45b7f11b6d7a") ,  
  "user_id": "Daniel",  
  "age": 25,  

```




Collections and Schema Validation

The document model used by MongoDB can enforce a schema if required, the recommended approach is to do so using JSON Schema.

JSON Schema:

- Allows a prescribed document structure to be configured on a per collection basis.
- Can tune schema validation according to use case.
- Can be used by any query to inspect document structure and content.

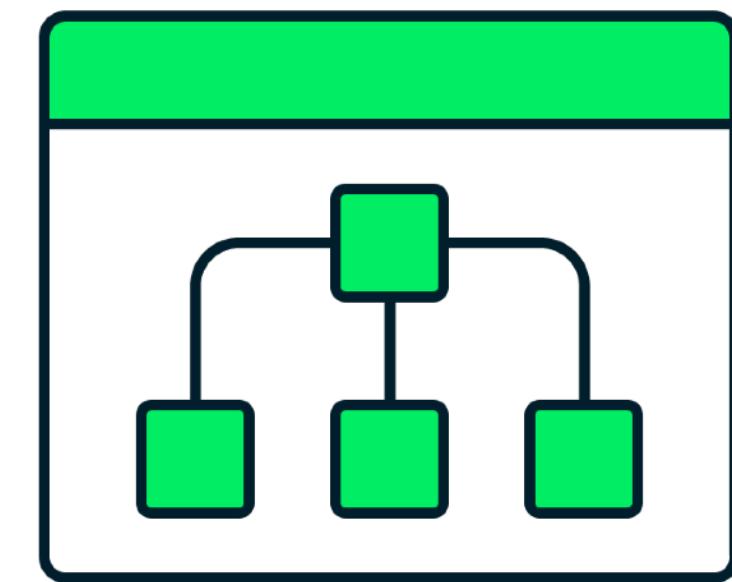

Schema Validation

This example creates a users collection with validation rules:

- The document must be an object.
- It must have the required fields: `image`, `mail`, `name`, and `title`.
- The `_id` must be a unique `objectId`.
- The `image` must be a string.
- The `mail` must be a string and follow the pattern of a valid email address.
- The `name` and `title` must be strings.

You can customize the validation rules based on your specific requirements. Adjust the properties, types, and patterns as needed.

```
db.createCollection("users", {  
    validator: {  
        $jsonSchema: {  
            bsonType: "object",  
            required: ["image", "mail", "name", "title"],  
            properties: {  
                _id: {  
                    bsonType: "objectId",  
                    description: "must be a unique ObjectId"  
                },  
                image: {  
                    bsonType: "string",  
                    description: "must be a string and is required"  
                },  
                mail: {  
                    bsonType: "string",  
                    pattern: "^[a-zA-Z0-9._%+-]+@[a-zA-Z0-9.-]+\\". [a-zA-Z]{2,}$$",  
                    description: "must be a valid email address and is required"  
                },  
                name: {  
                    bsonType: "string",  
                    description: "must be a string and is required"  
                },  
                title: {  
                    bsonType: "string",  
                    description: "must be a string and is required"  
                }  
            }  
        }  
    }  
});
```



MQL


MongoDB Query Language



Simple syntax

Designed to query
documents

Only queries a single
collection

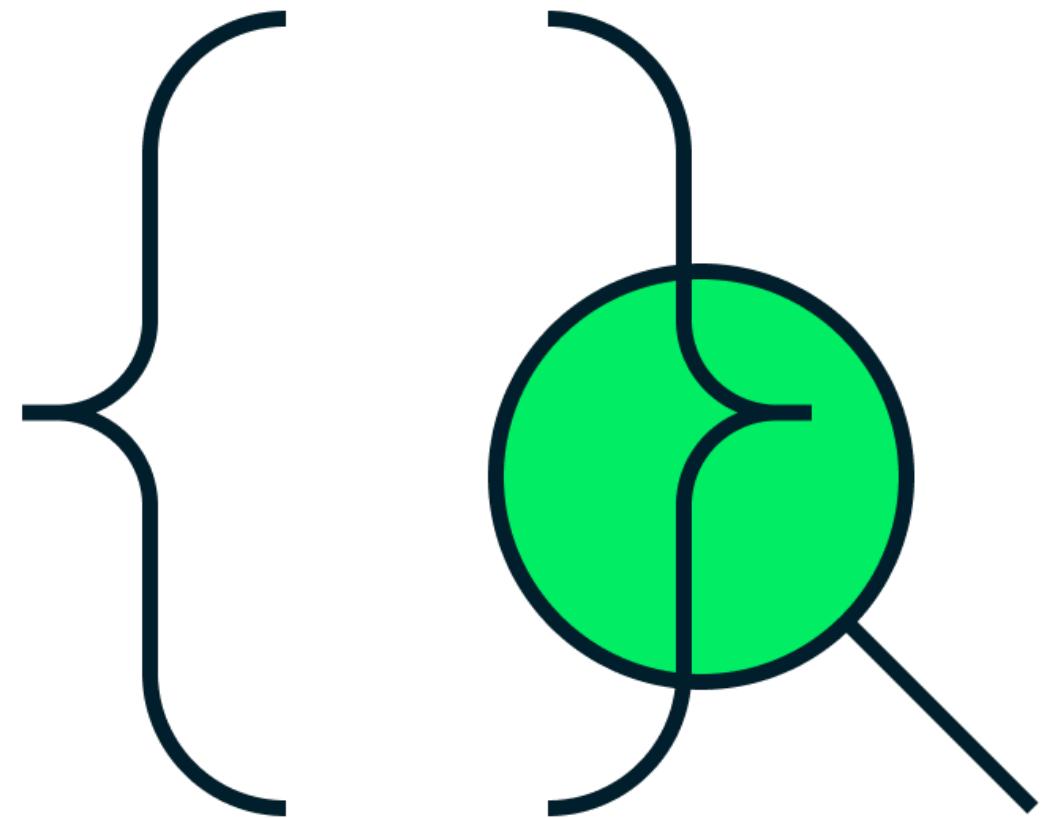

MongoDB Query Language



MongoDB Query Language

MQL is designed for single collection queries and it is typically used for creating, reading, updating, or deletion (CRUD) operations.

MQL query operators:

- Comparison
- Logical
- Element
- Array
- Evaluation
- Bitwise
- Comment
- Geospatial
- Projection, Update and Update
Modifiers



MQL Find()





MQL Find()

db.<collection>.find()

Query filter document

db.collection.find({ <field1>: <value1>, ... })

Specifying query operators

db.<collection>.find({ <field1>: { <operator1>: <value1> }, ... })



MQL Find()

db.<collection>.find()

Query filter document

db.collection.find({ <field1>: <value1>, ... })

Specifying query operators

db.<collection>.find({ <field1>: { <operator1>: <value1> }, ... })



MQL Find()

db.<collection>.find()

Query filter document

db.collection.find({ <field1>: <value1>, ... })


Specifying query operators

db.<collection>.find({ <field1>: { <operator1>: <value1> }, ... })



MQL Find(): Important Note

The collection is implicit in MQL based on
the query's criteria.

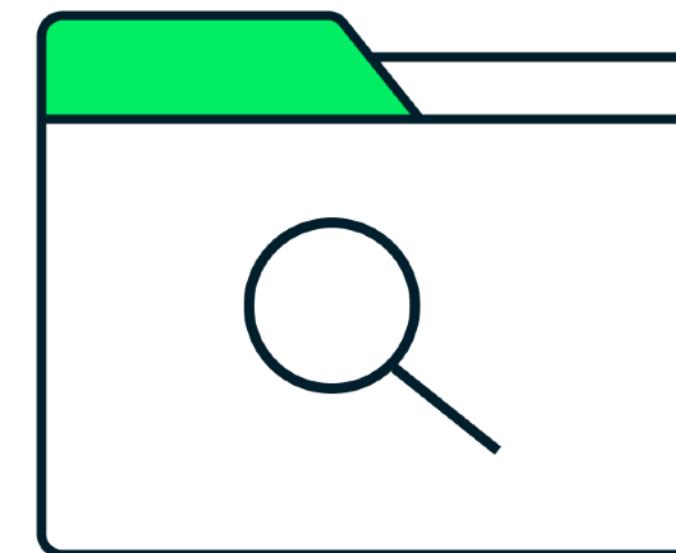

Querying with Mongoose






Simple syntax

Designed to query
documents

Only queries a single
collection

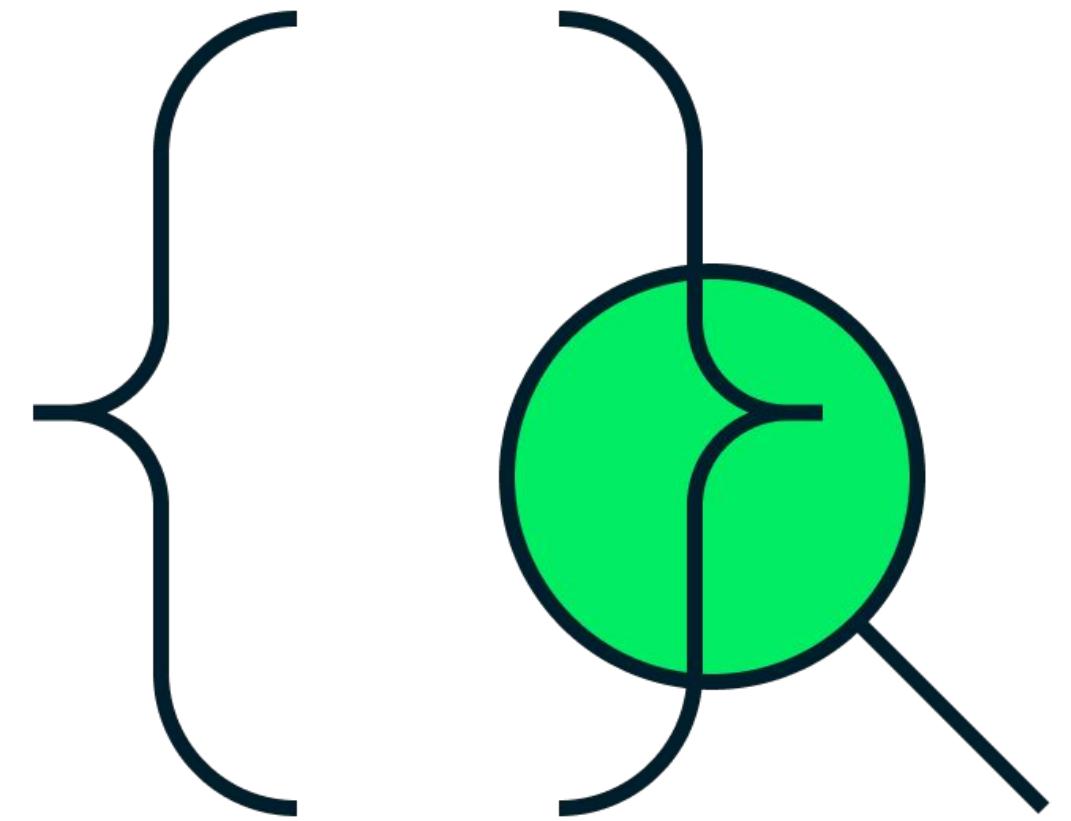

MongoDB Query
Language



`$lt`: Exists and less than

`$lte`: Exists and less than or equal to

`$gt`: Exists and greater than

`$gte`: Exists and greater than or equal to

`$ne`: Does not exist or does but not equal to

`$eq`: Exists and equal to

`$in`: Exists and in a set

`$nin`: Does not exist or not in a set

MQL Query Operators: Comparison



```
db.people.find(  
  {  
    "age": { $lt: 30 }  
  }  
)
```

With the age field
value being \$lt (less
than) 30

Query Users

1. Find all users:

javascript

 Copy code

```
const allUsers = await User.find();
console.log(allUsers);
```

2. Find a specific user by ID:

javascript

 Copy code

```
const specificUser = await User.findById("user_id_here");
console.log(specificUser);
```

3. Find users with a specific title:

javascript

 Copy code

```
const usersWithTitle = await User.find({ title: "Senior Lecturer" });
console.log(usersWithTitle);
```

Query Posts

1. Find all posts:

javascript

 Copy code

```
const allPosts = await Post.find();
console.log(allPosts);
```

2. Find posts with a specific tag:

javascript

 Copy code

```
const postsWithTag = await Post.find({ tags: "tag_name_here" });
console.log(postsWithTag);
```

3. Find posts with multiple tags:

javascript

 Copy code

```
const postsWithTags = await Post.find({ tags: { $in: ["tag1", "tag2"] } });
console.log(postsWithTags);
```

4. Find posts by a specific user:

javascript

 Copy code

```
const userPosts = await Post.find({ user: "user_id_here" });
console.log(userPosts);
```

5. Find posts with a minimum number of likes:

javascript

 Copy code

```
const popularPosts = await Post.find({ likes: { $gte: 100 } });
console.log(popularPosts);
```

Greater Than and Less Than Queries

1. Find posts with more than 100 likes:

javascript

 Copy code

```
const postsWithMoreThan100Likes = await Post.find({ likes: { $gt: 100 } });
console.log(postsWithMoreThan100Likes);
```

2. Find posts with less than 50 likes:

javascript

 Copy code

```
const postsWithLessThan50Likes = await Post.find({ likes: { $lt: 50 } });
console.log(postsWithLessThan50Likes);
```

3. Find posts with likes between 50 and 100 (inclusive):

javascript

 Copy code

```
const postsWithLikesBetween50And100 = await Post.find({ likes: { $gte: 50, $lte: 100 } });
console.log(postsWithLikesBetween50And100);
```

One tag

```
export async function loader() {
  const posts = await mongoose.models.Post.find({ tags: "Aarhus" })
    .sort({ createdAt: -1 })
    .populate("user")
    .exec();

  return json({ posts });
}
```

Multiple tags

```
export async function loader() {
  const posts = await mongoose.models.Post.find({ tags: { $in: ["tag1", "tag2"] } });

  return json({ posts });
}
```

Multiple tags with populate

```
export async function loader() {
  const posts = await mongoose.models.Post.find({ tags: { $in: ["Aarhus", "city"] } })
    .sort({ createdAt: -1 })
    .populate("user")
    .exec();

  return json({ posts });
}
```

Post by specific user


```
export async function loader() {
  const posts = await mongoose.models.Post.find({ user: "65cde4cb0d09cb615a23db17" });

  return json({ posts });
}
```

Search - caption: “beautiful”

```
export async function loader() {
  const posts = await mongoose.models.Post.find({
    caption: { $regex: /beautiful/i }
  })
    .sort({ createdAt: -1 })
    .populate("user")
    .exec();


  return json({ posts });
}
```

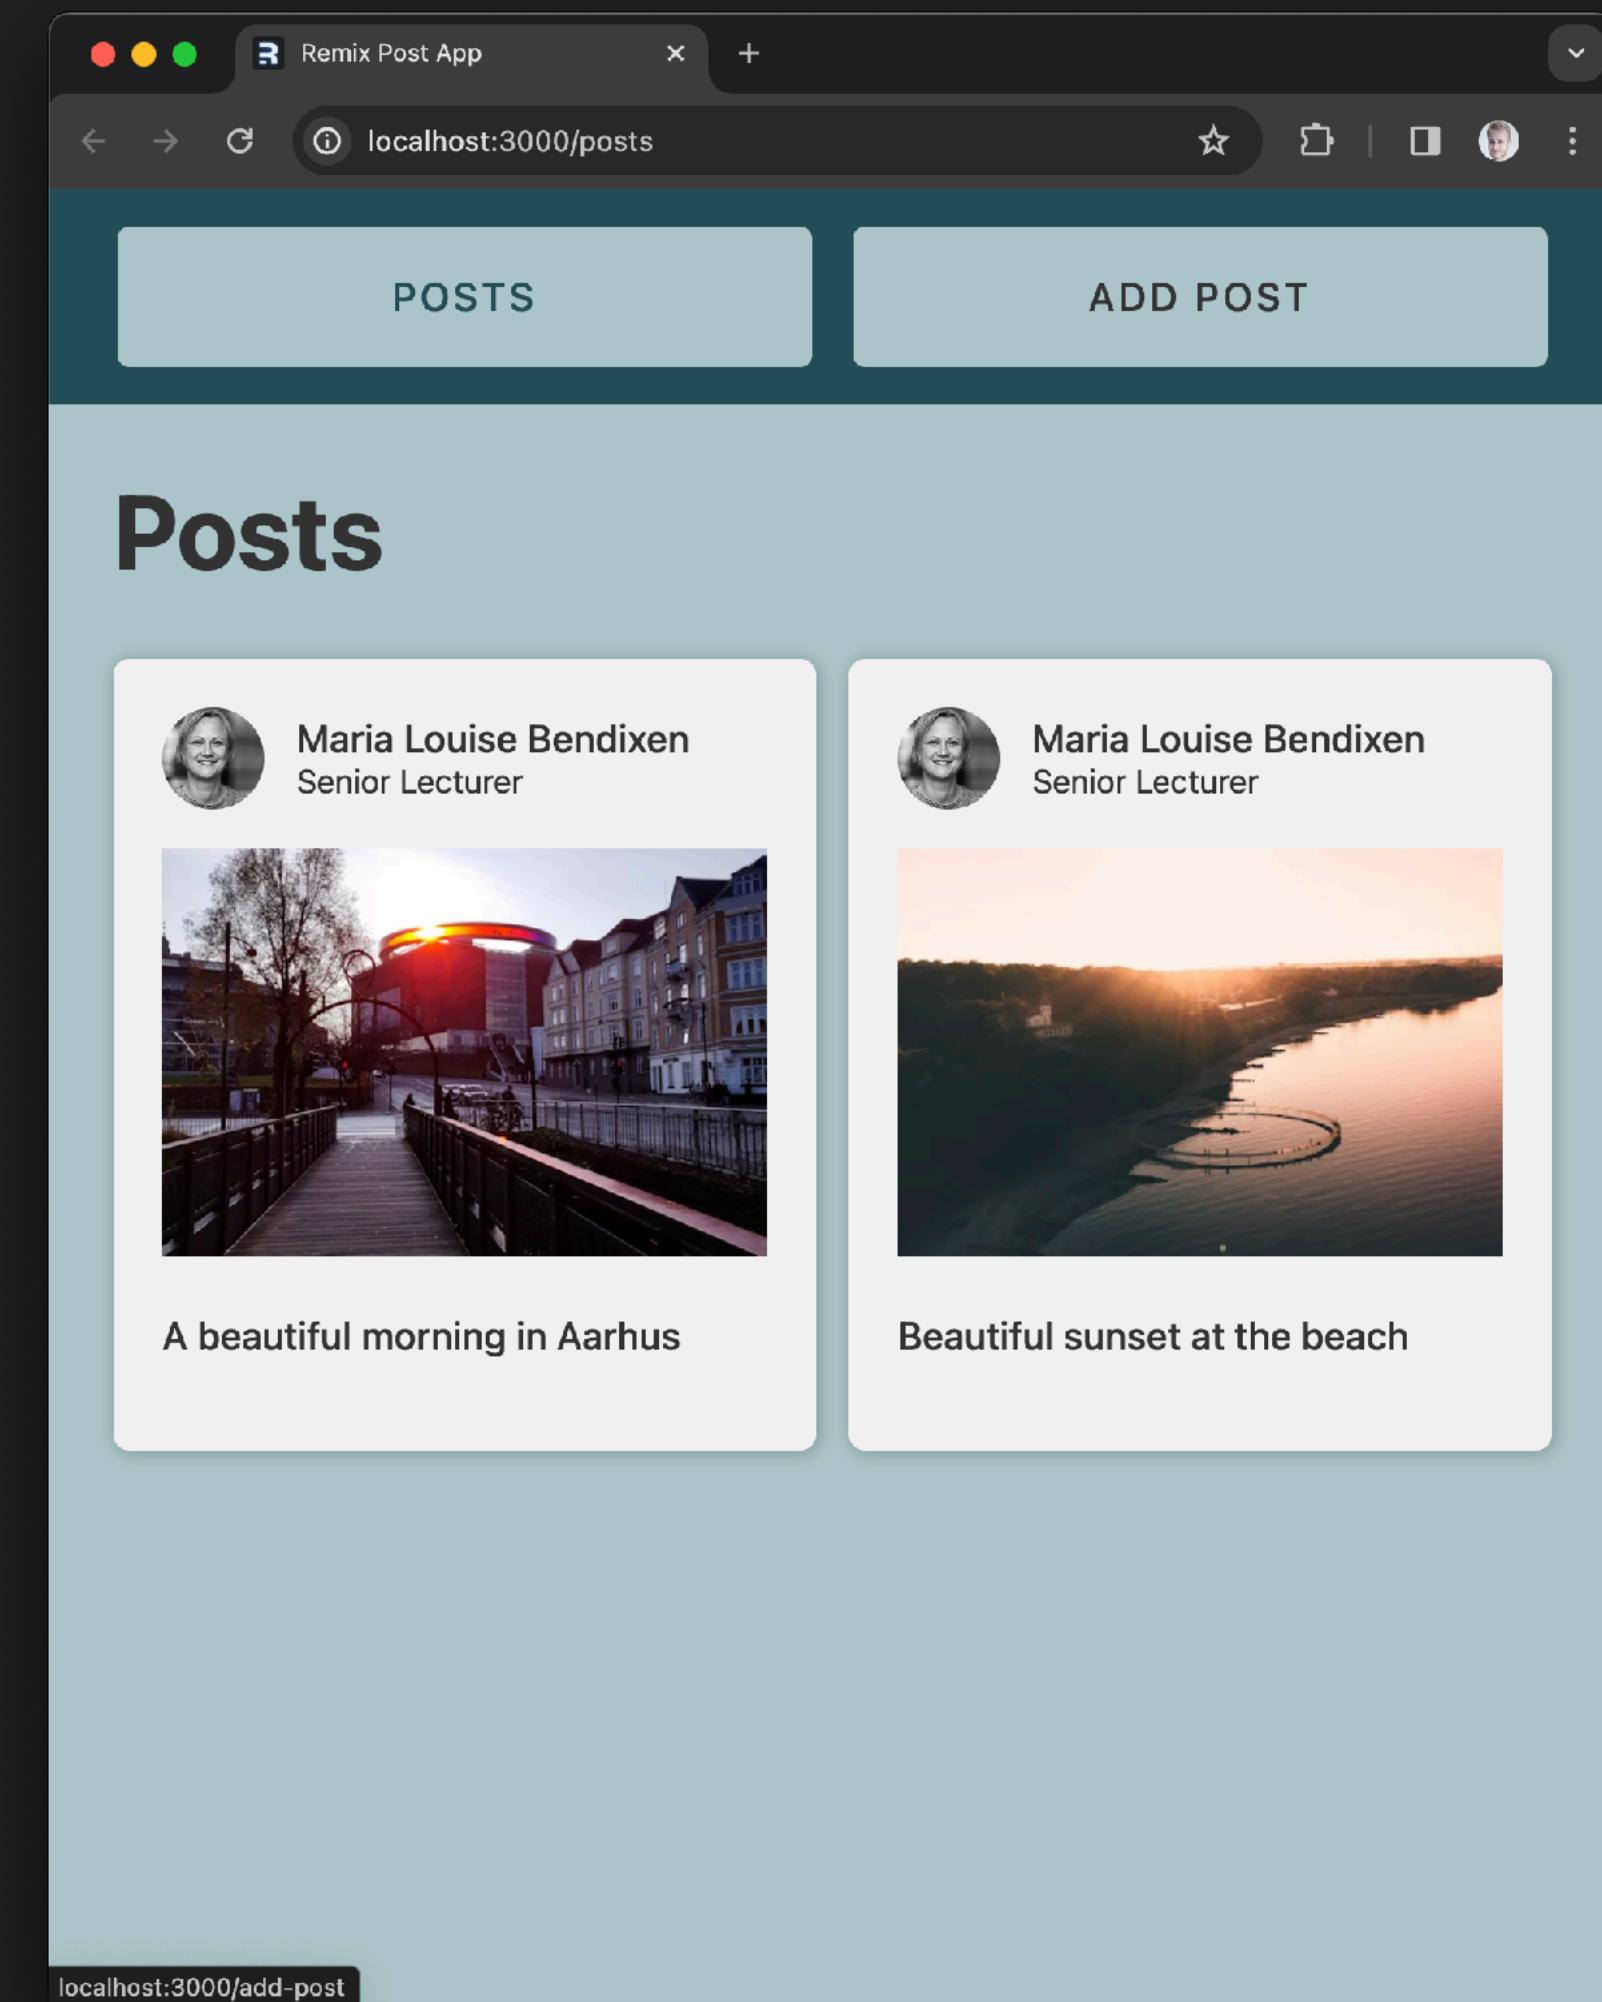

Search - caption: “aarh”

```
export async function loader() {
  const posts = await mongoose.models.Post.find({
    caption: { $regex: /aarh/i }
  })
    .sort({ createdAt: -1 })
    .populate("user")
    .exec();

  return json({ posts });
}
```

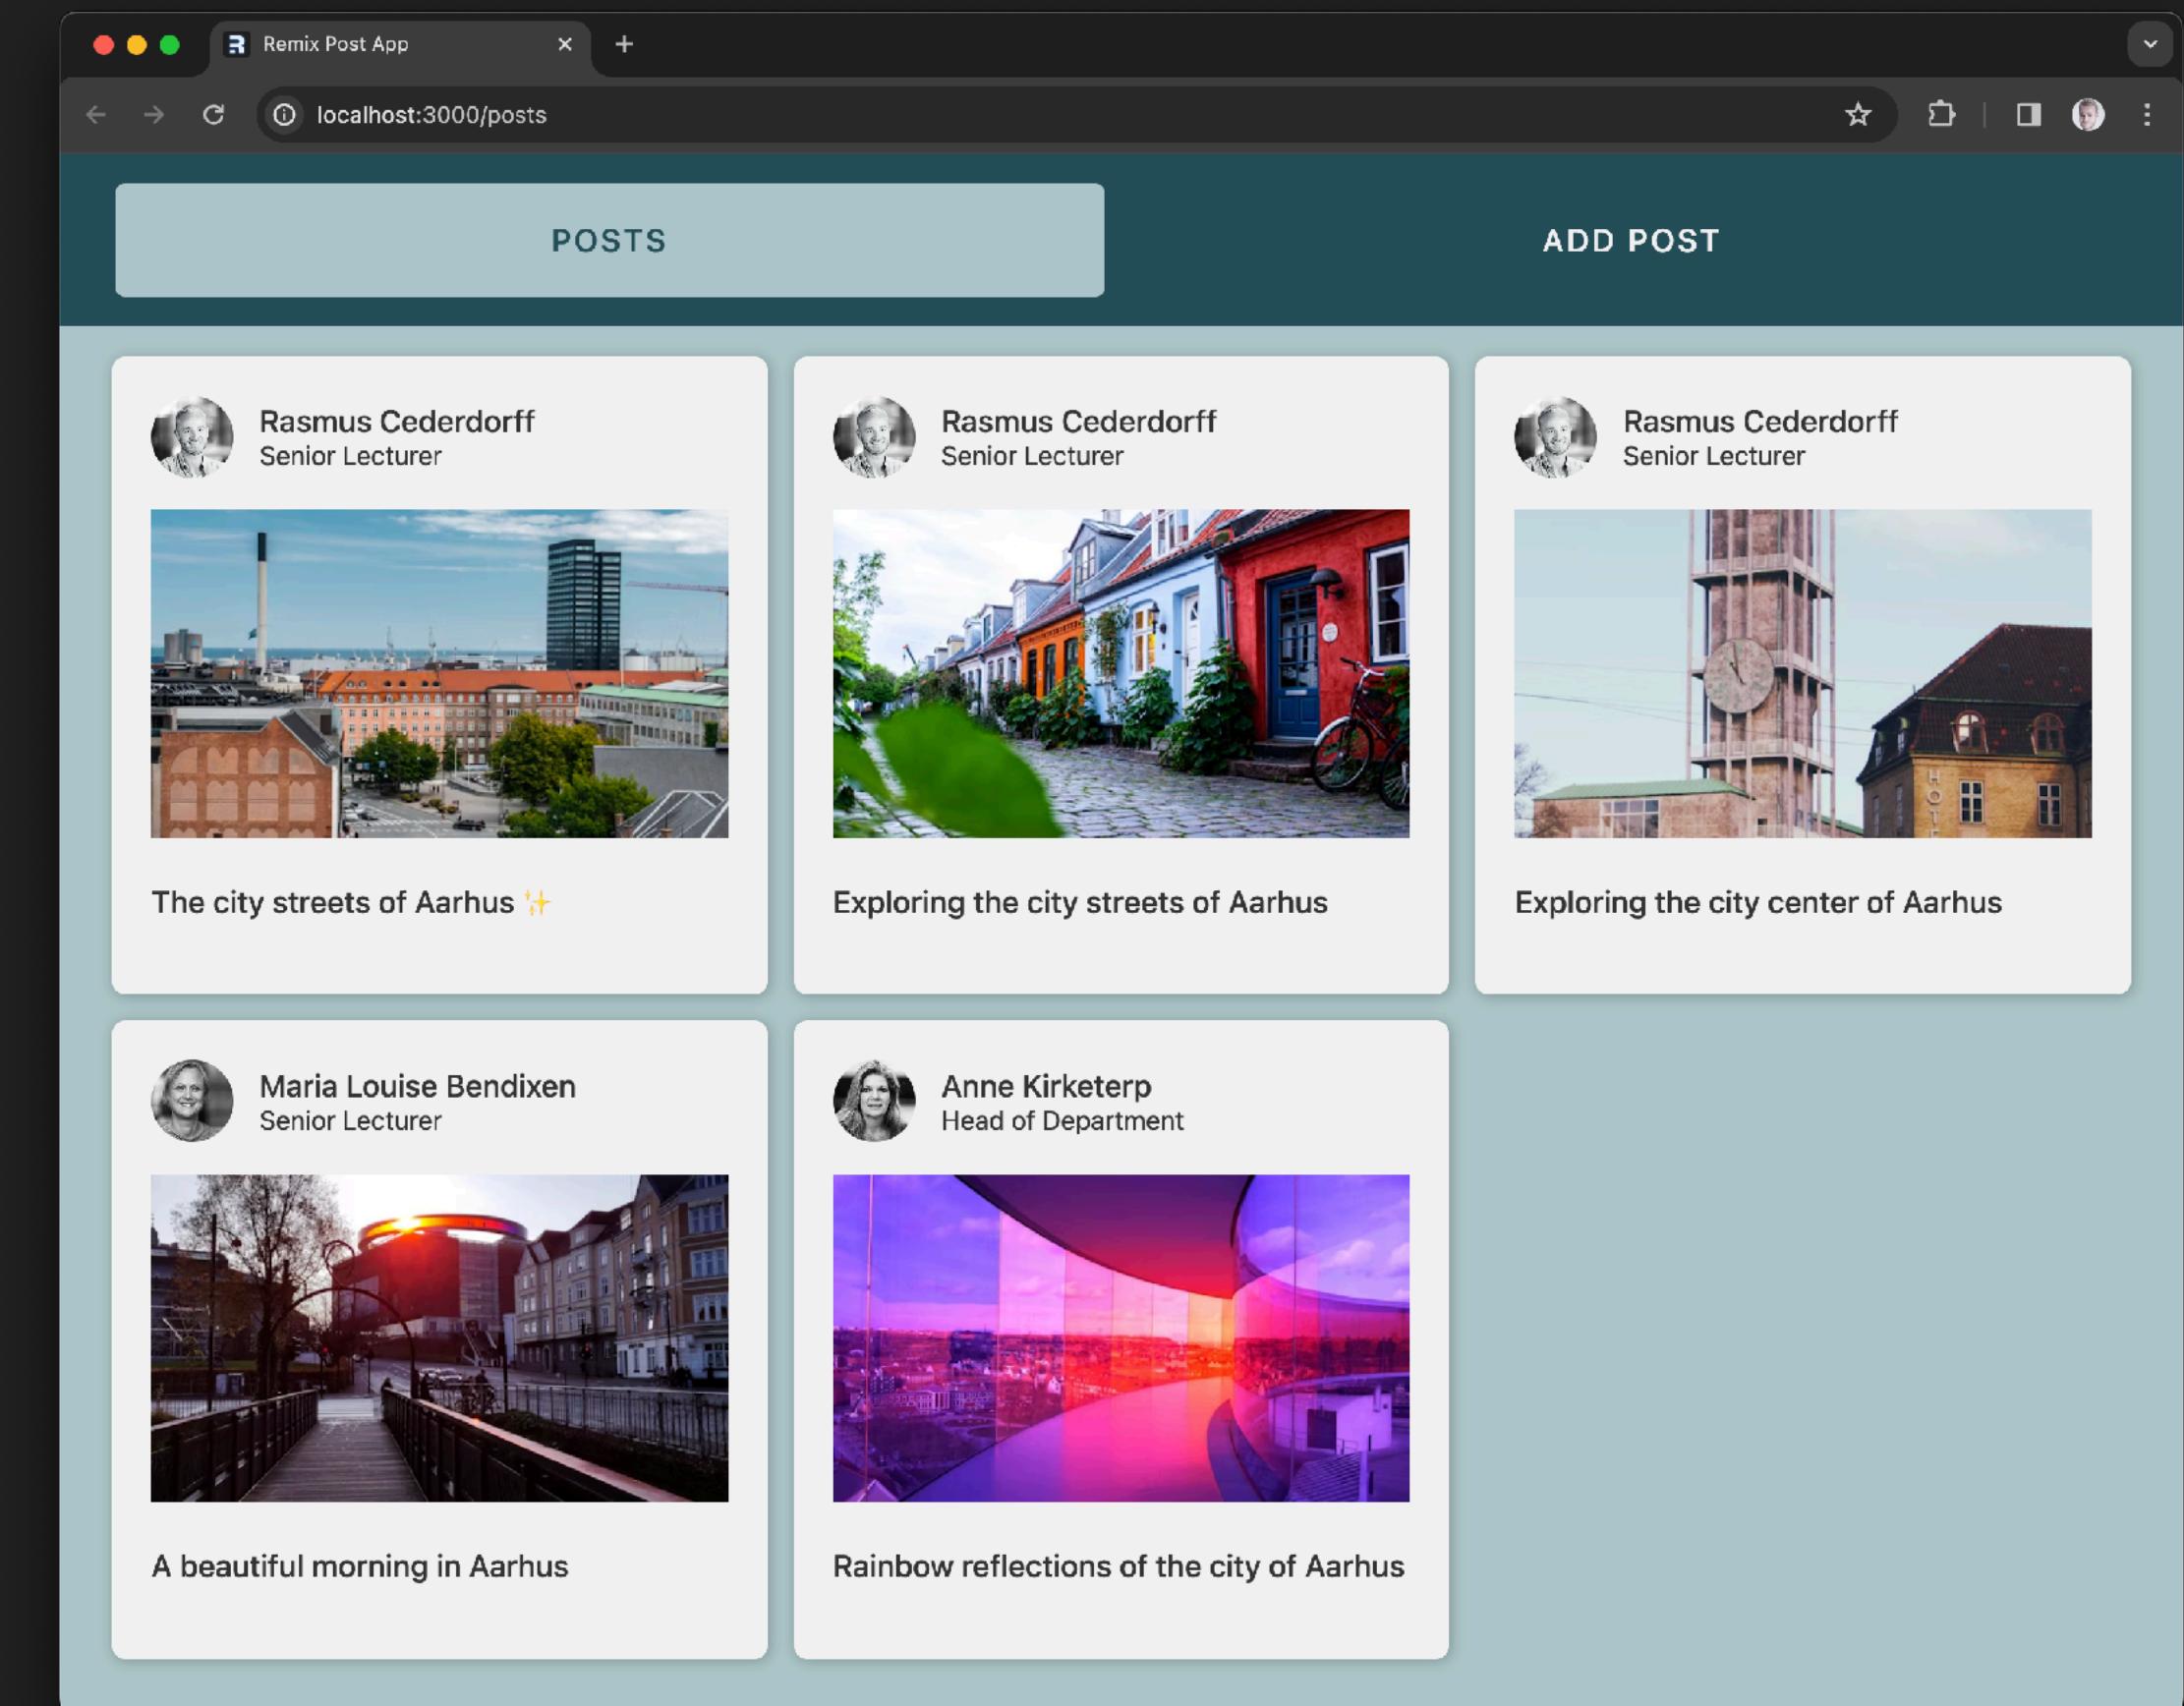

SQL vs MQL



The following table presents the various SQL terminology and concepts and the corresponding MongoDB terminology and concepts.

SQL Terms/Concepts	MongoDB Terms/Concepts
database	database
table	collection
row	document or BSON document
column	field
index	index
table joins	<code>\$lookup</code> , embedded documents
primary key	primary key
Specify any unique column or column combination as primary key.	In MongoDB, the primary key is automatically set to the <code>_id</code> field.

<https://www.mongodb.com/docs/manual/reference/sql-comparison/>

SQL Schema Statements

```
CREATE TABLE people (
    id MEDIUMINT NOT NULL
        AUTO_INCREMENT,
    user_id Varchar(30),
    age Number,
    status char(1),
    PRIMARY KEY (id)
)
```

MongoDB Schema Statements

Implicitly created on first `insertOne()` or `insertMany()` operation. The primary key `_id` is automatically added if `_id` field is not specified.

```
db.people.insertOne( {
    user_id: "abc123",
    age: 55,
    status: "A"
} )
```

SQL INSERT Statements

```
INSERT INTO people(user_id,  
                  age,  
                  status)  
VALUES ("bcd001",  
       45,  
      "A")
```

MongoDB insertOne() Statements

```
db.people.insertOne(  
  { user_id: "bcd001", age: 45, status: "A" })
```

SQL SELECT Statements

```
SELECT *  
FROM people
```

```
SELECT id,  
       user_id,  
       status  
FROM people
```

```
SELECT user_id, status  
FROM people
```

```
SELECT *  
FROM people  
WHERE status = "A"
```

MongoDB find() Statements

```
db.people.find()
```

```
db.people.find(  
    { },  
    { user_id: 1, status: 1 }  
)
```

```
db.people.find(  
    { },  
    { user_id: 1, status: 1, _id: 0 }  
)
```

```
db.people.find(  
    { status: "A" }  
)
```

SQL Update Statements

```
UPDATE people  
SET status = "C"  
WHERE age > 25
```

```
UPDATE people  
SET age = age + 3  
WHERE status = "A"
```

MongoDB updateMany() Statements

```
db.people.updateMany(  
  { age: { $gt: 25 } },  
  { $set: { status: "C" } }  
)
```

```
db.people.updateMany(  
  { status: "A" } ,  
  { $inc: { age: 3 } }  
)
```

MySQL

TABLE
1995
SCHEMA
RIGID



MongoDB

DOCUMENT
2007
JSON
FLEXIBLE

Differences between SQL and NoSQL

	SQL Databases	NoSQL Databases
Data Storage Model	Tables with fixed rows and columns	Document: JSON documents, Key-value: key-value pairs, Wide-column: tables with rows and dynamic columns, Graph: nodes and edges
Development History	Developed in the 1970s with a focus on reducing data duplication	Developed in the late 2000s with a focus on scaling and allowing for rapid application change driven by agile and DevOps practices.
Examples	Oracle, MySQL, Microsoft SQL Server, and PostgreSQL	Document: MongoDB and CouchDB, Key-value: Redis and DynamoDB, Wide-column: Cassandra and HBase, Graph: Neo4j and Amazon Neptune
Primary Purpose	General purpose	Document: general purpose, Key-value: large amounts of data with simple lookup queries, Wide-column: large amounts of data with predictable query patterns, Graph: analyzing and traversing relationships between connected data
Schemas	Rigid	Flexible
Scaling	Vertical (scale-up with a larger server)	Horizontal (scale-out across commodity servers)
Multi-Record ACID Transactions	Supported	Most do not support multi-record ACID transactions. However, some – like MongoDB – do.
Joins	Typically required	Typically not required
Data to Object Mapping	Requires ORM (object-relational mapping)	Many do not require ORMs. MongoDB documents map directly to data structures in most popular programming languages.

<https://www.mongodb.com/nosql-explained/nosql-vs-sql>

Features: SQL vs NoSQL

Feature	SQL Databases	NoSQL Databases
Data Structure	Structured	Flexible (Document, Key-Value, Graph, Wide-Column)
Data Types	Structured	Structured, Semi-structured, Unstructured
Scalability	Vertical (increasing resources on a single server)	Horizontal (adding more servers to a cluster)
ACID Compliance	Yes	No (may support eventual consistency)
Query Language	Structured Query Language (SQL)	Less structured query languages or no specific query language
Applications	E-commerce, Financial Systems, Enterprise Applications	Web Applications, Social Media Platforms, Mobile Apps
Strengths	Data organization, Complex queries, ACID compliance	Flexibility, Scalability, Handling unstructured data
Weaknesses	Rigid schema, Slow performance for large data	Less mature technology, Less standardized query syntax

[Export to Sheets](#)

<https://g.co/bard/share/9a4c7d0aa722>

Features: MySQL vs MongoDB

Feature	MySQL	MongoDB
Data Structure	Relational (tables, rows, columns)	Document (JSON-like documents)
Schema	Rigid, requires predefined schema	No schema, flexible data structure
Data Types	Structured	Structured, Semi-structured, Unstructured (JSON, XML, binary data)
Scalability	Vertical (increasing resources on a single server)	Horizontal (adding more servers to a cluster)
ACID Compliance	Yes	Eventual consistency
Query Language	Structured Query Language (SQL)	MongoDB Query Language (MongoDBQL)
Applications	E-commerce, Financial Systems, Enterprise Applications	Web Applications, Social Media Platforms, Mobile Apps, Real-time applications
Strengths	Data organization, Complex queries, ACID compliance, Mature technology	Flexibility, Scalability, Handling unstructured data, Real-time data handling
Weaknesses	Rigid schema, Slow performance for large data	Less mature technology, Less standardized query syntax, May not support complex queries

Export to Sheets

<https://g.co/bard/share/1233c9c2da05>

Best For: MySQL vs MongoDB

Feature	MySQL	MongoDB
Best for	Applications with structured data, complex queries, and strict data integrity	Applications with unstructured or evolving data, high scalability, and real-time data handling

 Export to Sheets

<https://g.co/bard/share/1233c9c2da05>

MongoDB CRUD Operations



MongoDB CRUD Operations - x +

mongodb.com/docs/manual/crud/

MongoDB Products Resources Solutions Company Pricing

MongoDB Documentation Docs Home → Develop Applications → MongoDB Manual

← Back To Develop Applications

MongoDB Manual

7.0 (current)

- ▶ Introduction
- ▶ Installation
- MongoDB Shell (mongosh)
- ▼ MongoDB CRUD Operations
 - ▶ Insert Documents
 - ▶ Query Documents
 - ▶ Update Documents
 - ▶ Delete Documents
 - Bulk Write Operations
 - Retryable Writes
 - Retryable Reads
 - SQL to MongoDB Mapping Chart

[https://www.mongodb.com/pricing](#)

MongoDB CRUD Operations

CRUD operations *create, read, update, and delete* documents.

You can connect with driver methods and perform CRUD operations for deployments hosted in the following environments:

 You can perform CRUD operations in the UI for deployments hosted in MongoDB Atlas.

Create Operations

Create or insert operations add new [documents](#) to a [collection](#). If the collection does not currently exist, insert operations will create the collection.

MongoDB provides the following methods to insert documents into a collection:

- `db.collection.insertOne()` New in version 3.2
- `db.collection.insertMany()` New in version 3.2

Share Feedback


when you ask Rasmus for help and he says "Read documentation"



<https://www.mongodb.com/docs/manual/crud/>

The Docs and Articles

- MongoDB, Inc. 2023. Introduction to MongoDB: <https://www.mongodb.com/docs/manual/introduction/>
- MongoDB, Inc. 2023. Databases and Collections: <https://www.mongodb.com/docs/manual/core/databases-and-collections/>
- MongoDB, Inc. 2023. MongoDB CRUD Operations: <https://www.mongodb.com/docs/manual/crud/>
- MongoDB, Inc. 2023. Data Modeling Introduction: <https://www.mongodb.com/docs/manual/core/data-modeling-introduction/>
- MongoDB, Inc. 2023. Indexes: <https://www.mongodb.com/docs/manual/indexes/>
- Beugnet, M. 2023. MongoDB Cheat Sheet: <https://www.mongodb.com/developer/products/mongodb/cheat-sheet/>
- Karlsson, j. 2023. MongoDB Schema Design Best Practices: <https://www.mongodb.com/developer/products/mongodb/mongodb-schema-design-best-practices/>

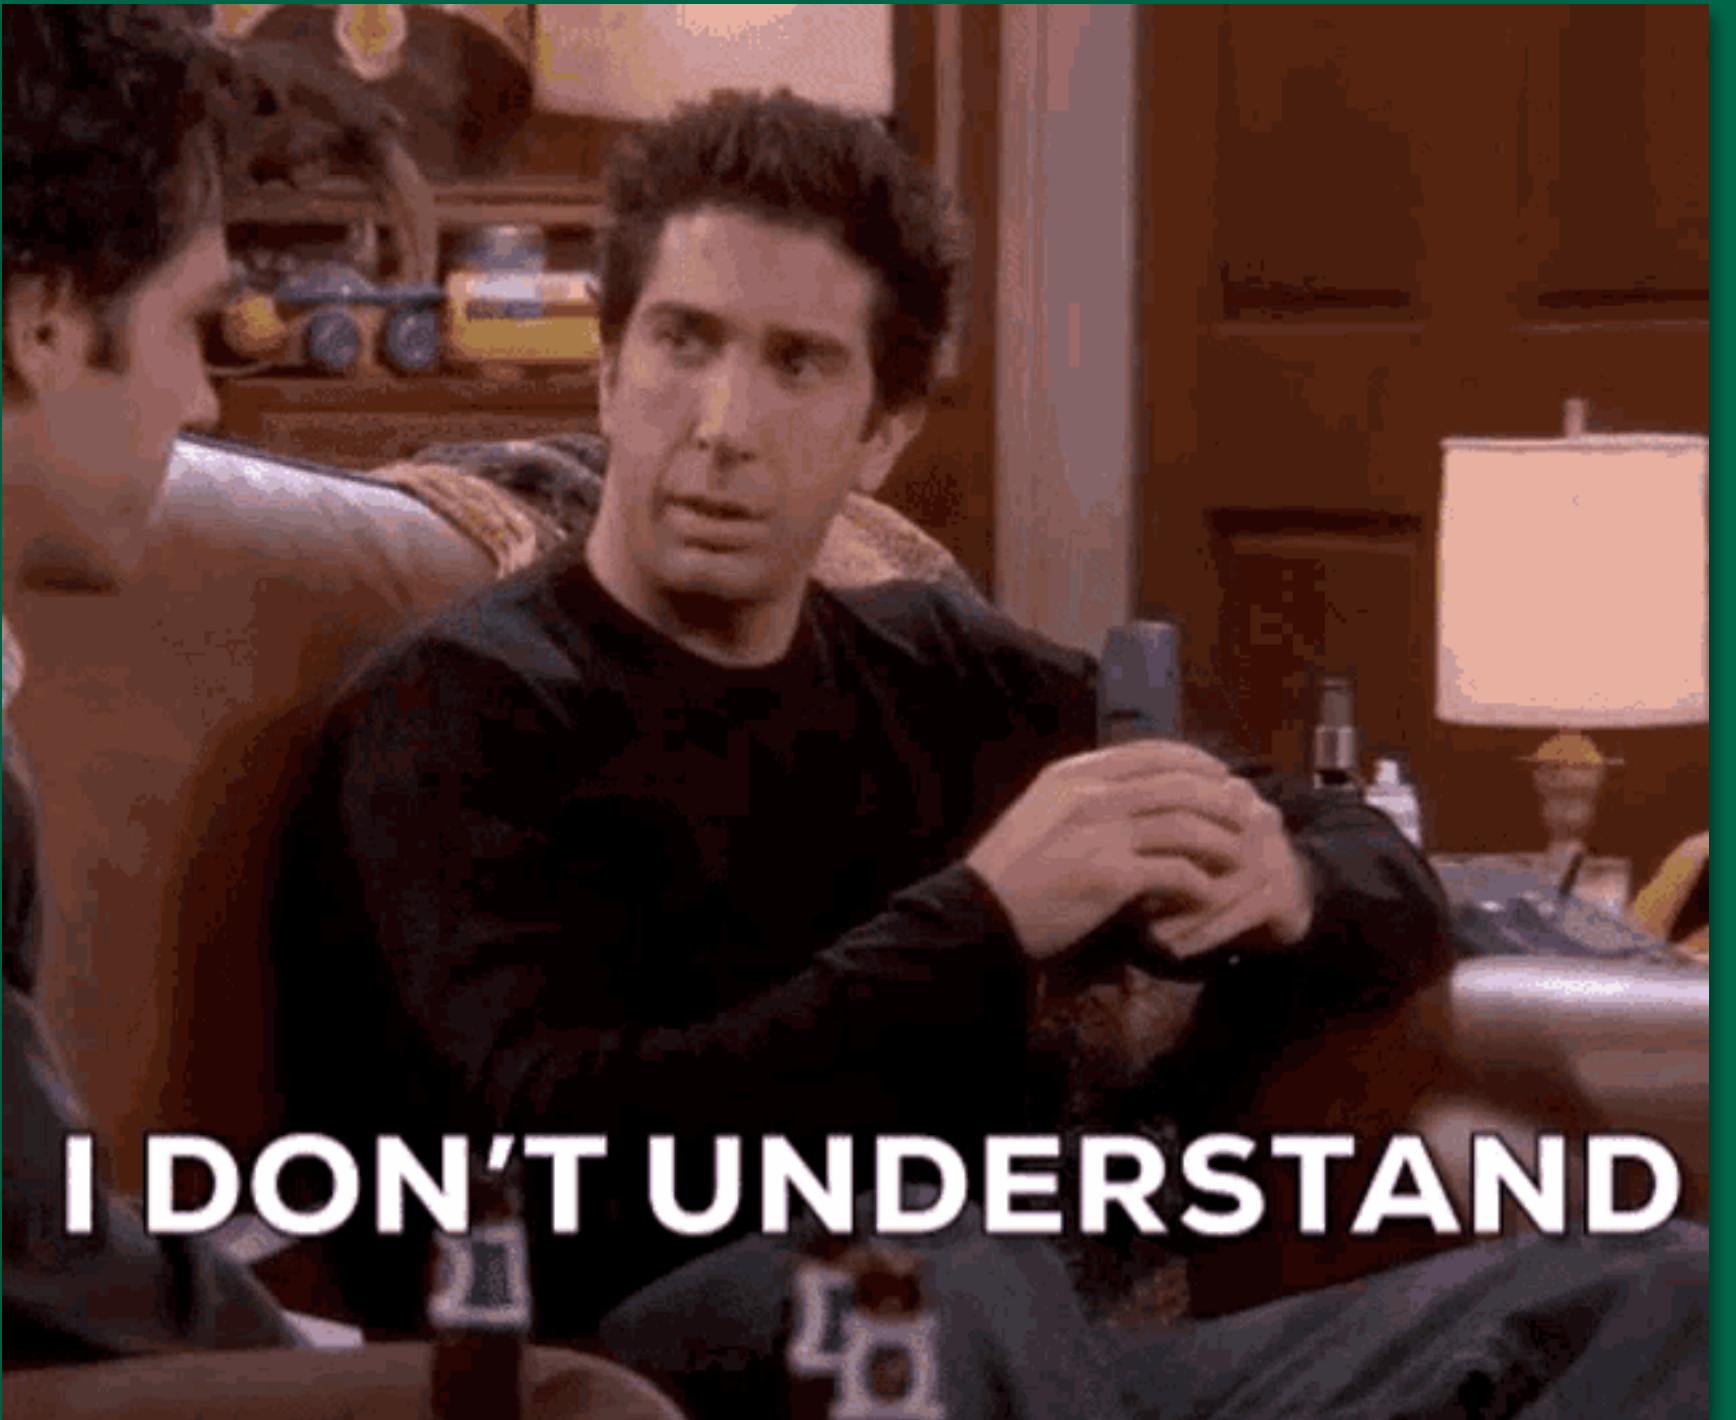

Create

```
db.users.insertOne(← collection
{
  name: "sue", ← field: value
  age: 26, ← field: value
  status: "pending" ← field: value } document
})
```

```
db.createCollection("posts")

db.posts.insertOne(
{
  caption: "Beautiful sunset at the beach",
  createdAt: new Date("2023-04-05T15:27:14Z"),
  image: "https://images.unsplash.com/photo-1566241832378-917a0f30db2c?ixlib=rb-4.0.3",
  uid: ObjectId("ZfPTVEMQKf9v")
}

db.posts.insertMany([
  {
    caption: "Beautiful sunset at the beach",
    createdAt: new Date("2023-04-05T15:27:14Z"),
    image: "https://images.unsplash.com/photo-1566241832378-917a0f30db2c?ixlib=rb-4.0.3",
    uid: ObjectId("ZfPTVEMQKf9v")
  },
  {
    caption: "Exploring the city streets of Aarhus",
    createdAt: new Date("2023-04-06T10:45:30Z"),
    image: "https://images.unsplash.com/photo-1559070169-a3077159ee16?ixlib=rb-4.0.3",
    uid: ObjectId("fTs84KRoYw5p")
  },
  {
    caption: "Delicious food at the restaurant",
    createdAt: new Date("2023-04-04T20:57:24Z"),
    image: "https://images.unsplash.com/photo-1548940740-204726a19be3?ixlib=rb-4.0.3",
    uid: ObjectId("fjpRTTjZHwr")
  },
  //...
])
```

Read

```
db.users.find(  
  { age: { $gt: 18 } },  
  { name: 1, address: 1 }  
).limit(5)
```

← collection
← query criteria
← projection
← cursor modifier

```
// find all  
db.posts.find()  
  // find all - to array  
  db.posts.find().toArray()  
  
// posts with specific user  
db.posts.find({uid: ObjectId("ZfPTVEMQKf9v")})  
// all users with title: "Senior Lecturer"  
db.users.find({title:"Senior Lecturer"})  
  
// find and then sort  
// 1 for ascending or -1 for descending  
db.users.find().sort({name:1})  
db.posts.find().sort({createdAt:1})  
  
db.posts.find().count() // count docs
```

Update

```
db.users.updateMany(  
  { age: { $lt: 18 } },  
  { $set: { status: "reject" } } )
```

← collection
← update filter
← update action

```
db.users.updateOne(  
  // Specify the user you want to update  
  { _id: ObjectId("ZfPTVEMQKf9v") },  
  {  
    $set: {  
      // Update the name field with the new value  
      name: "New Name",  
      // Update the title field with the new value  
      title: "New Title"  
      // Add more fields to update as needed  
    }  
  }  
);  
  
db.users.updateMany(  
  // Specify the criteria for the documents you want to update  
  { title: "Senior Lecturer" },  
  {  
    $set: {  
      // Update the title field with the new value  
      title: "Updated Title",  
      // Add more fields to update as needed  
    }  
  }  
);
```

Update

- If you want to completely replace a document

```
db.users.replaceOne(  
    // Specify the user you want to replace  
    { _id: ObjectId("ZfPTVEMQKf9v") },  
    {  
        _id: ObjectId("ZfPTVEMQKf9v"),  
        image: "https://new-image-url.com",  
        mail: "new-email@example.com",  
        // Add more fields as needed  
    }  
);
```

Delete

```
db.users.deleteMany(  
  { status: "reject" }  
)
```



collection
delete filter

```
db.users.deleteOne(  
  // Specify the user you want to delete  
  { _id: ObjectId("ZfPTVEMQKf9v") }  
);  
  
db.users.deleteMany(  
  // Specify the criteria for the  
  // documents you want to delete  
  { title: "Senior Lecturer" }  
);
```

MySQL: Schema Design






Features: MySQL vs MongoDB

Feature	MySQL	MongoDB
Data Structure	Relational (tables, rows, columns)	Document (JSON-like documents)
Schema	Rigid, requires predefined schema	No schema, flexible data structure
Data Types	Structured	Structured, Semi-structured, Unstructured (JSON, XML, binary data)
Scalability	Vertical (increasing resources on a single server)	Horizontal (adding more servers to a cluster)
ACID Compliance	Yes	Eventual consistency
Query Language	Structured Query Language (SQL)	MongoDB Query Language (MongoDBQL)
Applications	E-commerce, Financial Systems, Enterprise Applications	Web Applications, Social Media Platforms, Mobile Apps, Real-time applications
Strengths	Data organization, Complex queries, ACID compliance, Mature technology	Flexibility, Scalability, Handling unstructured data, Real-time data handling
Weaknesses	Rigid schema, Slow performance for large data	Less mature technology, Less standardized query syntax, May not support complex queries

 Export to Sheets

<https://g.co/bard/share/1233c9c2da05>

Posts & Users

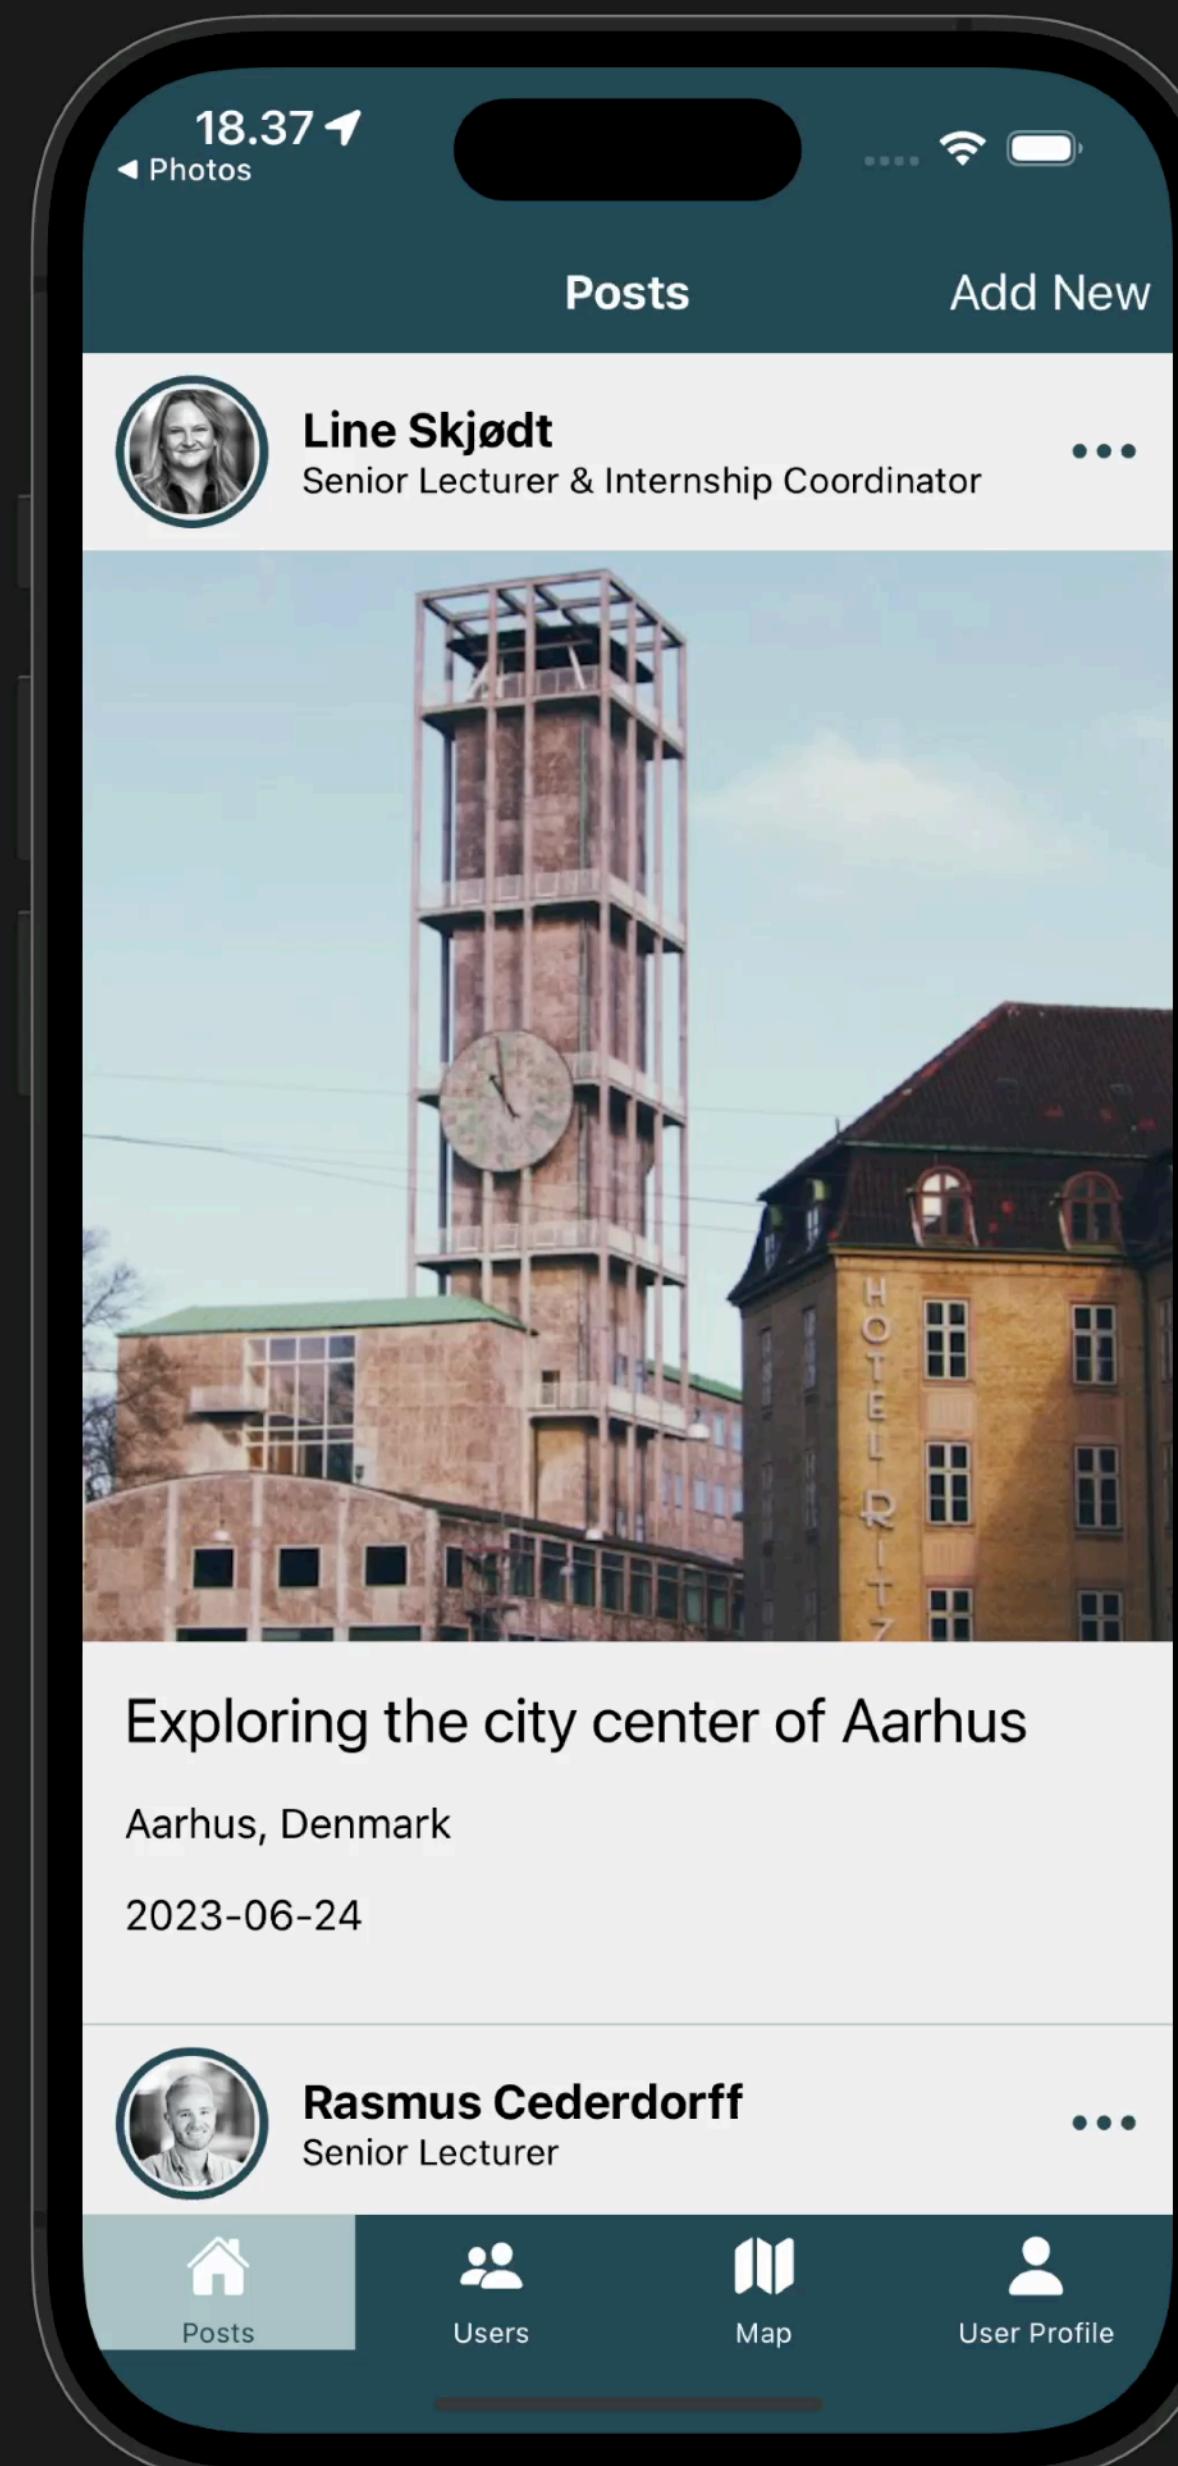


React Firebase REST Post App https://race-rest.web.app POSTS CREATE
Morten Algy Bonderup Senior Lecturer
Qui est esse
Est rerum tempore vitae sequi sint nihil reprehenderit dolor beatae ea dolores neque fugiat blanditiis voluptate porro vel nihil molestiae ut reiciendis qui aperiam non debitis possimus qui neque nisi nulla
Dan Okkels Brendstrup Lecturer
Consequuntur deleniti eos quia temporibus ab aliquid at
Voluptatem cumque tenetur consequatur expedita ipsum nemo quia explicabo aut eum minima consequatur tempore cumque quae est et et in consequuntur voluptatem voluptates aut
Kim Elkjær Marcher-Jepsen Senior Lecturer
At nam consequatur ea labore ea harum
Cupiditate quo est a modi nesciunt soluta ipsa voluptas error itaque dicta in autem qui minus magnam et distinctio eum accusamus ratione error aut
Birgitte Kirk Iversen Senior Lecturer
Jes Arbov Lecturer
Maria Louise Bendixen Senior Lecturer

posts

users

Data from tables

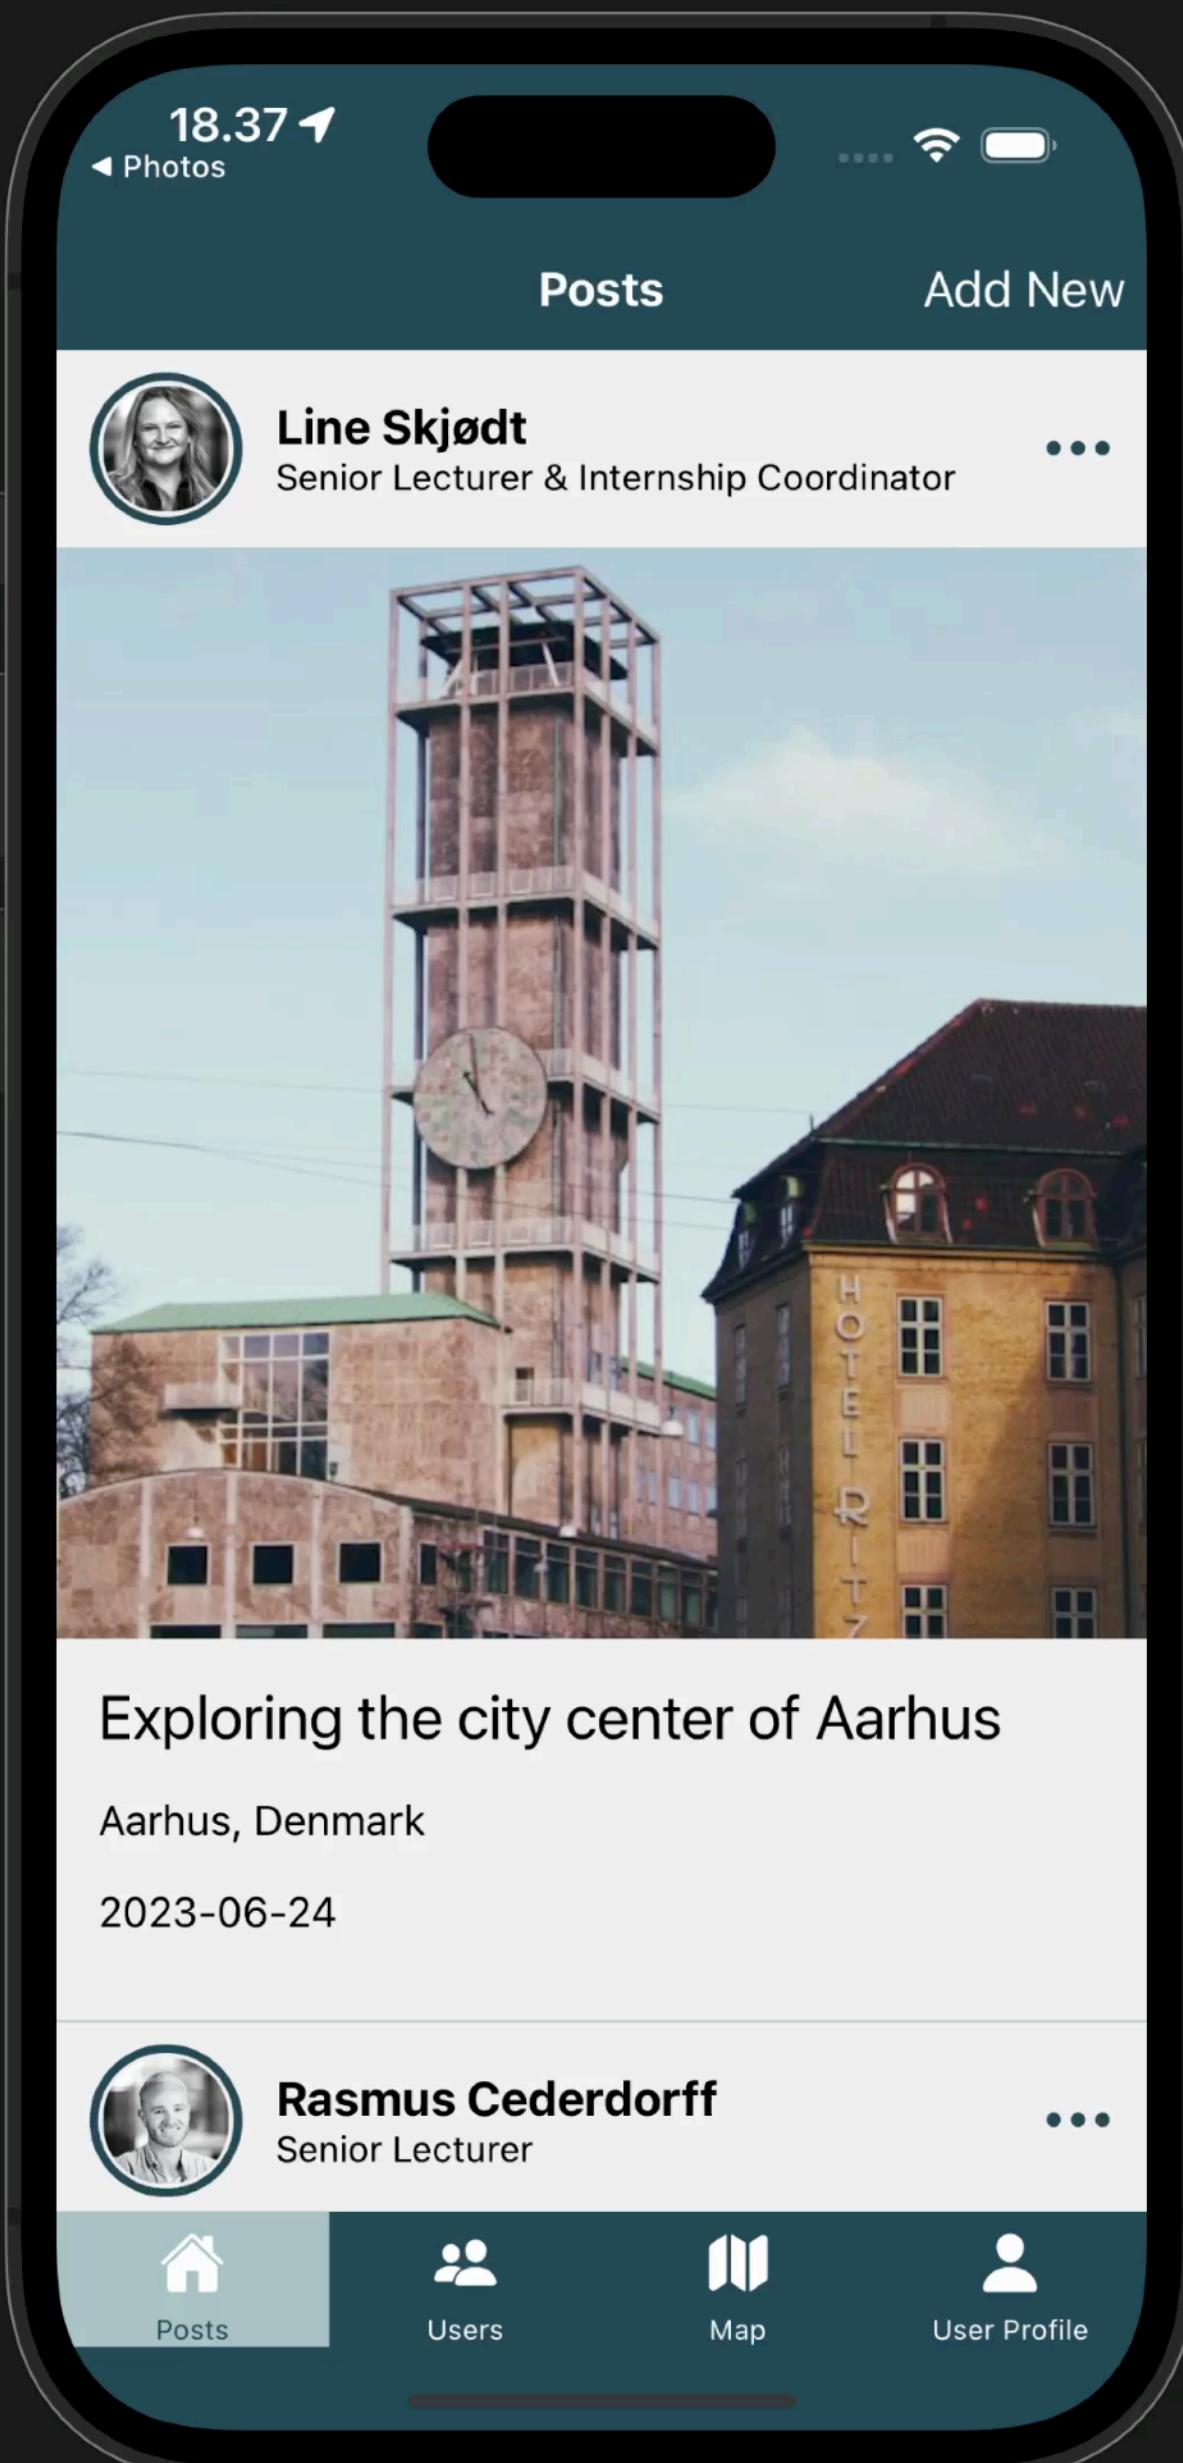


Posts

#	id	caption	image	createdAt
1	1	Beautiful sunset at the beach	https://images.unsplash.com/photo-1566241832378-917a0f30db2c?ixlib=rb-4.0.3&ixid=	2023-09-13 16:51:07
2	2	Exploring the city streets of Aarhus	https://images.unsplash.com/photo-1559070169-a3077159ee16?ixlib=rb-4.0.3&ixid=	2023-09-13 16:51:07
3	3	Delicious food at the restaurant	https://images.unsplash.com/photo-1548940740-204726a19be3?ixlib=rb-4.0.3&ixid=	2023-09-13 16:51:07
4	4	Exploring the city center of Aarhus	https://images.unsplash.com/photo-1612624629424-ddde915d3dc5?ixlib=rb-4.0.3&ixid=	2023-09-13 16:51:07
5	5	A cozy morning with coffee	https://images.unsplash.com/photo-1545319261-f3760f9dd64d?ixlib=rb-4.0.3&ixid=	2023-09-13 16:51:07
6	6	Serenity of the forest	https://images.unsplash.com/photo-1661505216710-32316e7b5bb3?ixlib=rb-4.0.3&ixid=	2023-09-13 16:51:07
7	7	A beautiful morning in Aarhus	https://images.unsplash.com/photo-1573997953524-efed43db70a0?ixlib=rb-4.0.3&ixid=	2023-09-13 16:51:07
8	8	Rainbow reflections of the city of Aarhus	https://images.unsplash.com/photo-1558443336-dbb3de50b8b2?ixlib=rb-4.0.3&ixid=	2023-09-13 16:51:07

Users

#	id	name	mail	title	image
1	1	Maria Louise Bendixen	mlbe@eaaa.dk	Senior Lecturer	https://www.baaa.dk/media/b5ahrllra/maria-loui...
2	2	Rasmus Cederdorff	race@eaaa.dk	Senior Lecturer	https://share.cederdorff.com/images/race.jpg
3	3	Anne Kirketerp	anki@eaaa.dk	Head of Department	https://www.baaa.dk/media/5buh1xeo/anne-kirke...
4	4	Line Skjødt	lskj@eaaa.dk	Senior Lecturer & Internship Coord...	https://www.eaaa.dk/media/14qpfeq4/line-skjod...
5	5	Dan Okkels Brendstrup	dob@eaaa.dk	Lecturer	https://www.eaaa.dk/media/bdojel41/dan-okkels...

How are they related?

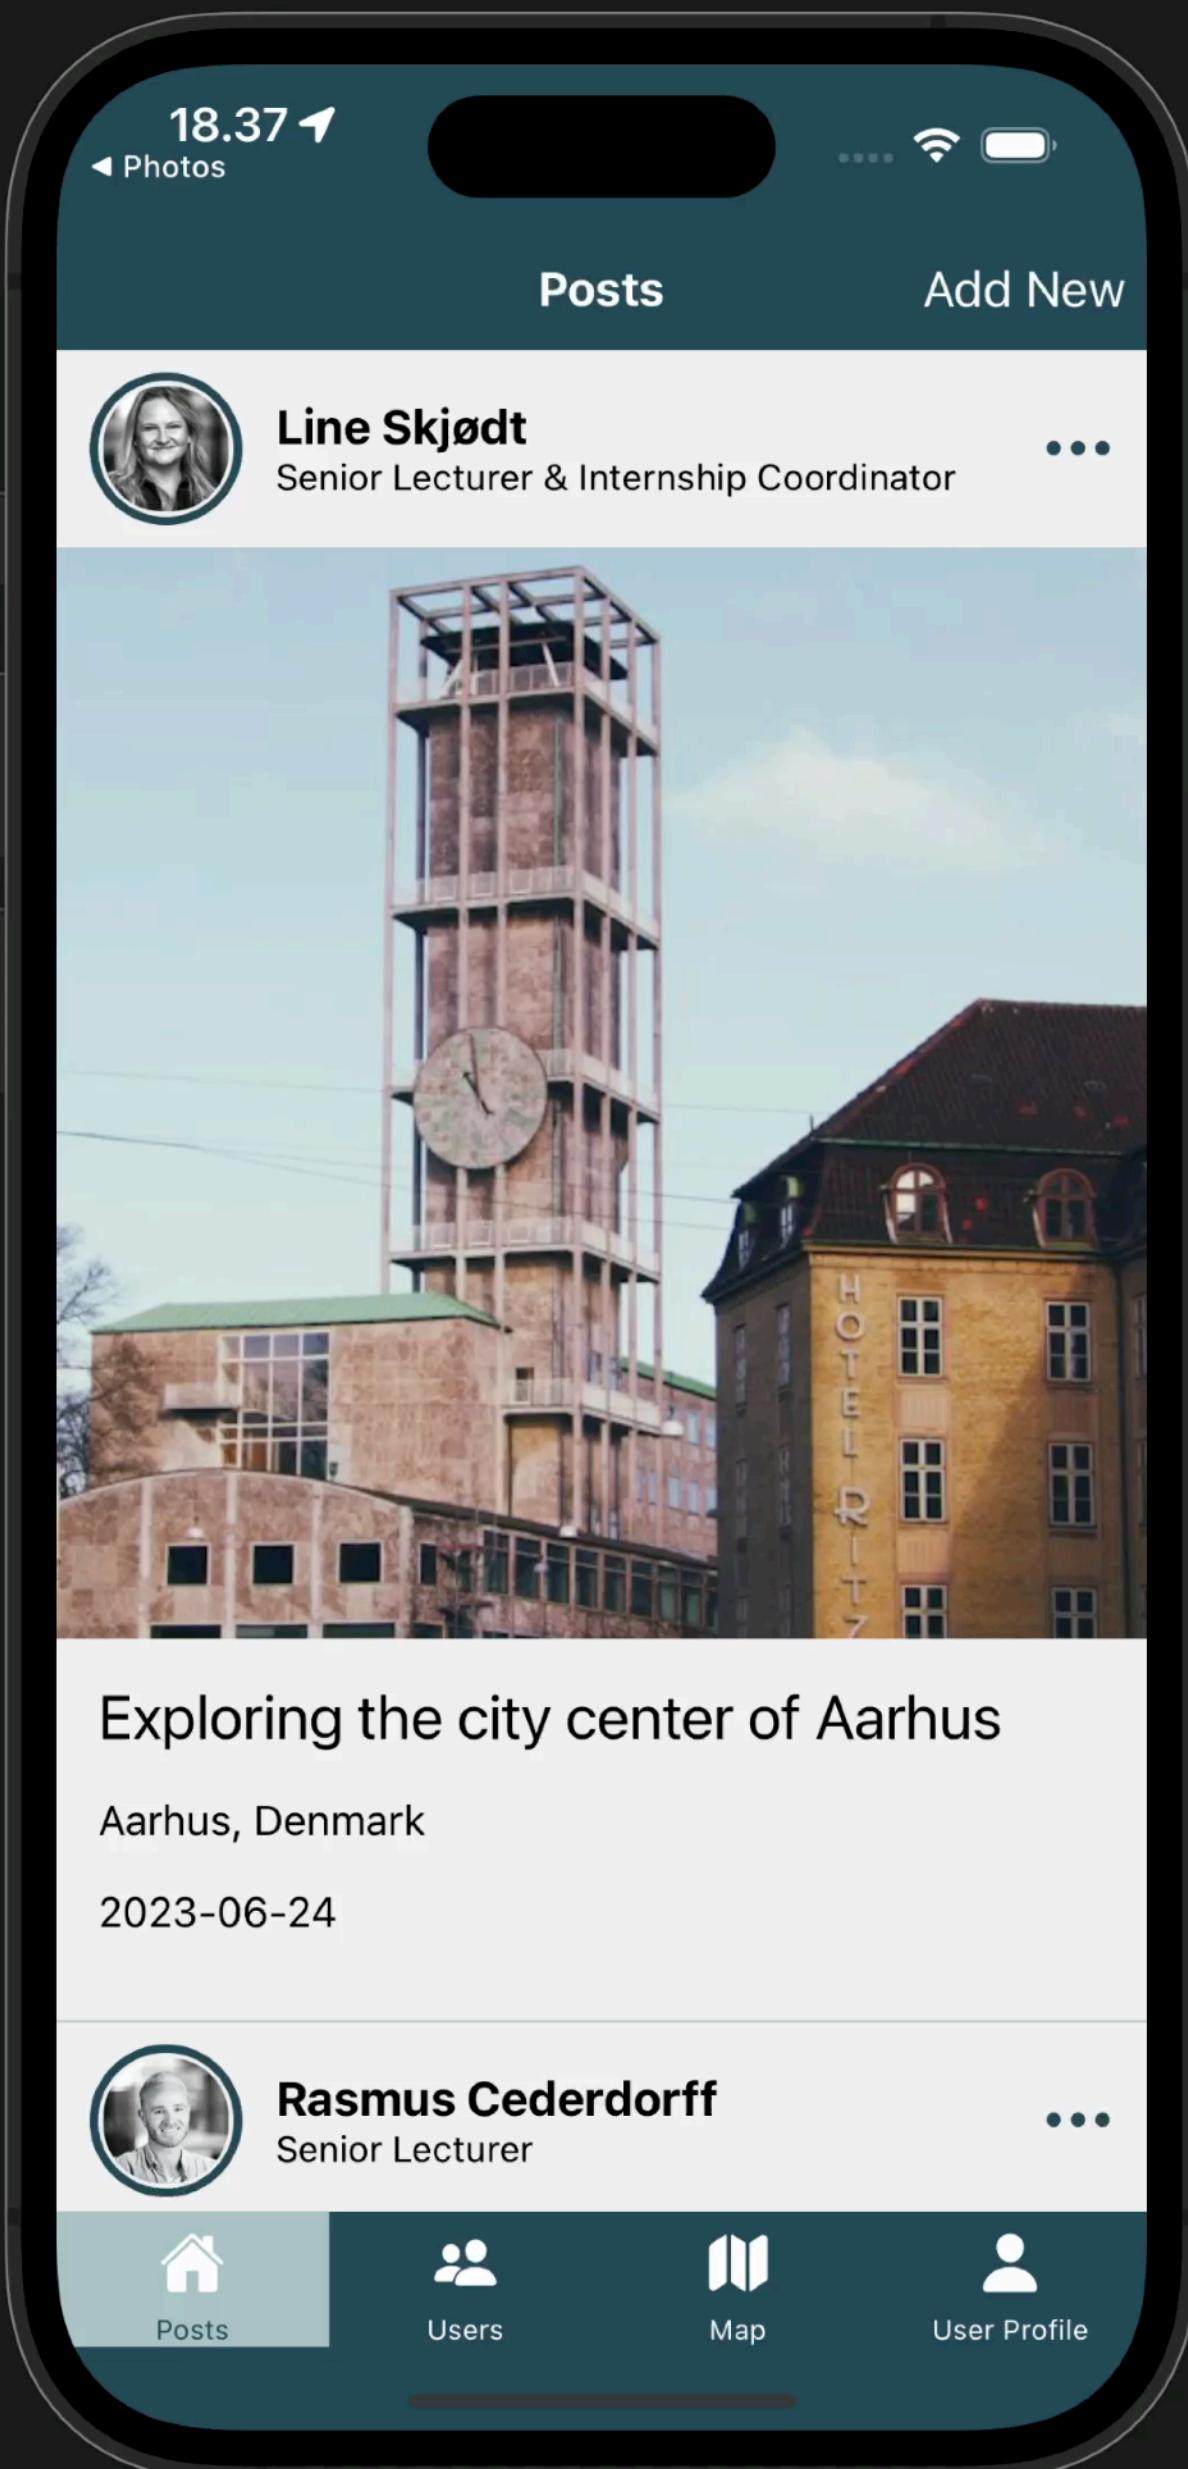


Posts

#	id	caption	image	createdAt
1	1	Beautiful sunset at the beach	https://images.unsplash.com/photo-1566241832378-917a0f30db2c?ixlib=rb-4.0.3&ixid=	2023-09-13 16:51:07
2	2	Exploring the city streets of Aarhus	https://images.unsplash.com/photo-1559070169-a3077159ee16?ixlib=rb-4.0.3&ixid=	2023-09-13 16:51:07
3	3	Delicious food at the restaurant	https://images.unsplash.com/photo-1548940740-204726a19be3?ixlib=rb-4.0.3&ixid=	2023-09-13 16:51:07
4	4	Exploring the city center of Aarhus	https://images.unsplash.com/photo-1612624629424-ddde915d3dc5?ixlib=rb-4.0.3&ixid=	2023-09-13 16:51:07
5	5	A cozy morning with coffee	https://images.unsplash.com/photo-1545319261-f3760f9dd64d?ixlib=rb-4.0.3&ixid=	2023-09-13 16:51:07
6	6	Serenity of the forest	https://images.unsplash.com/photo-1661505216710-32316e7b5bb3?ixlib=rb-4.0.3&ixid=	2023-09-13 16:51:07
7	7	A beautiful morning in Aarhus	https://images.unsplash.com/photo-1573997953524-efed43db70a0?ixlib=rb-4.0.3&ixid=	2023-09-13 16:51:07
8	8	Rainbow reflections of the city of Aarhus	https://images.unsplash.com/photo-1558443336-dbb3de50b8b2?ixlib=rb-4.0.3&ixid=	2023-09-13 16:51:07

Users

#	id	name	mail	title	image
1	1	Maria Louise Bendixen	mlbe@eaaa.dk	Senior Lecturer	https://www.baaa.dk/media/b5ahrlra/maria-loui...
2	2	Rasmus Cederdorff	race@eaaa.dk	Senior Lecturer	https://share.cederdorff.com/images/race.jpg
3	3	Anne Kirketerp	anki@eaaa.dk	Head of Department	https://www.baaa.dk/media/5buh1xeo/anne-kirke...
4	4	Line Skjødt	lskj@eaaa.dk	Senior Lecturer & Internship Coord...	https://www.eaaa.dk/media/14qpfeq4/line-skjod...
5	5	Dan Okkels Brendstrup	dob@eaaa.dk	Lecturer	https://www.eaaa.dk/media/bdojel41/dan-okkels...

How are they related?

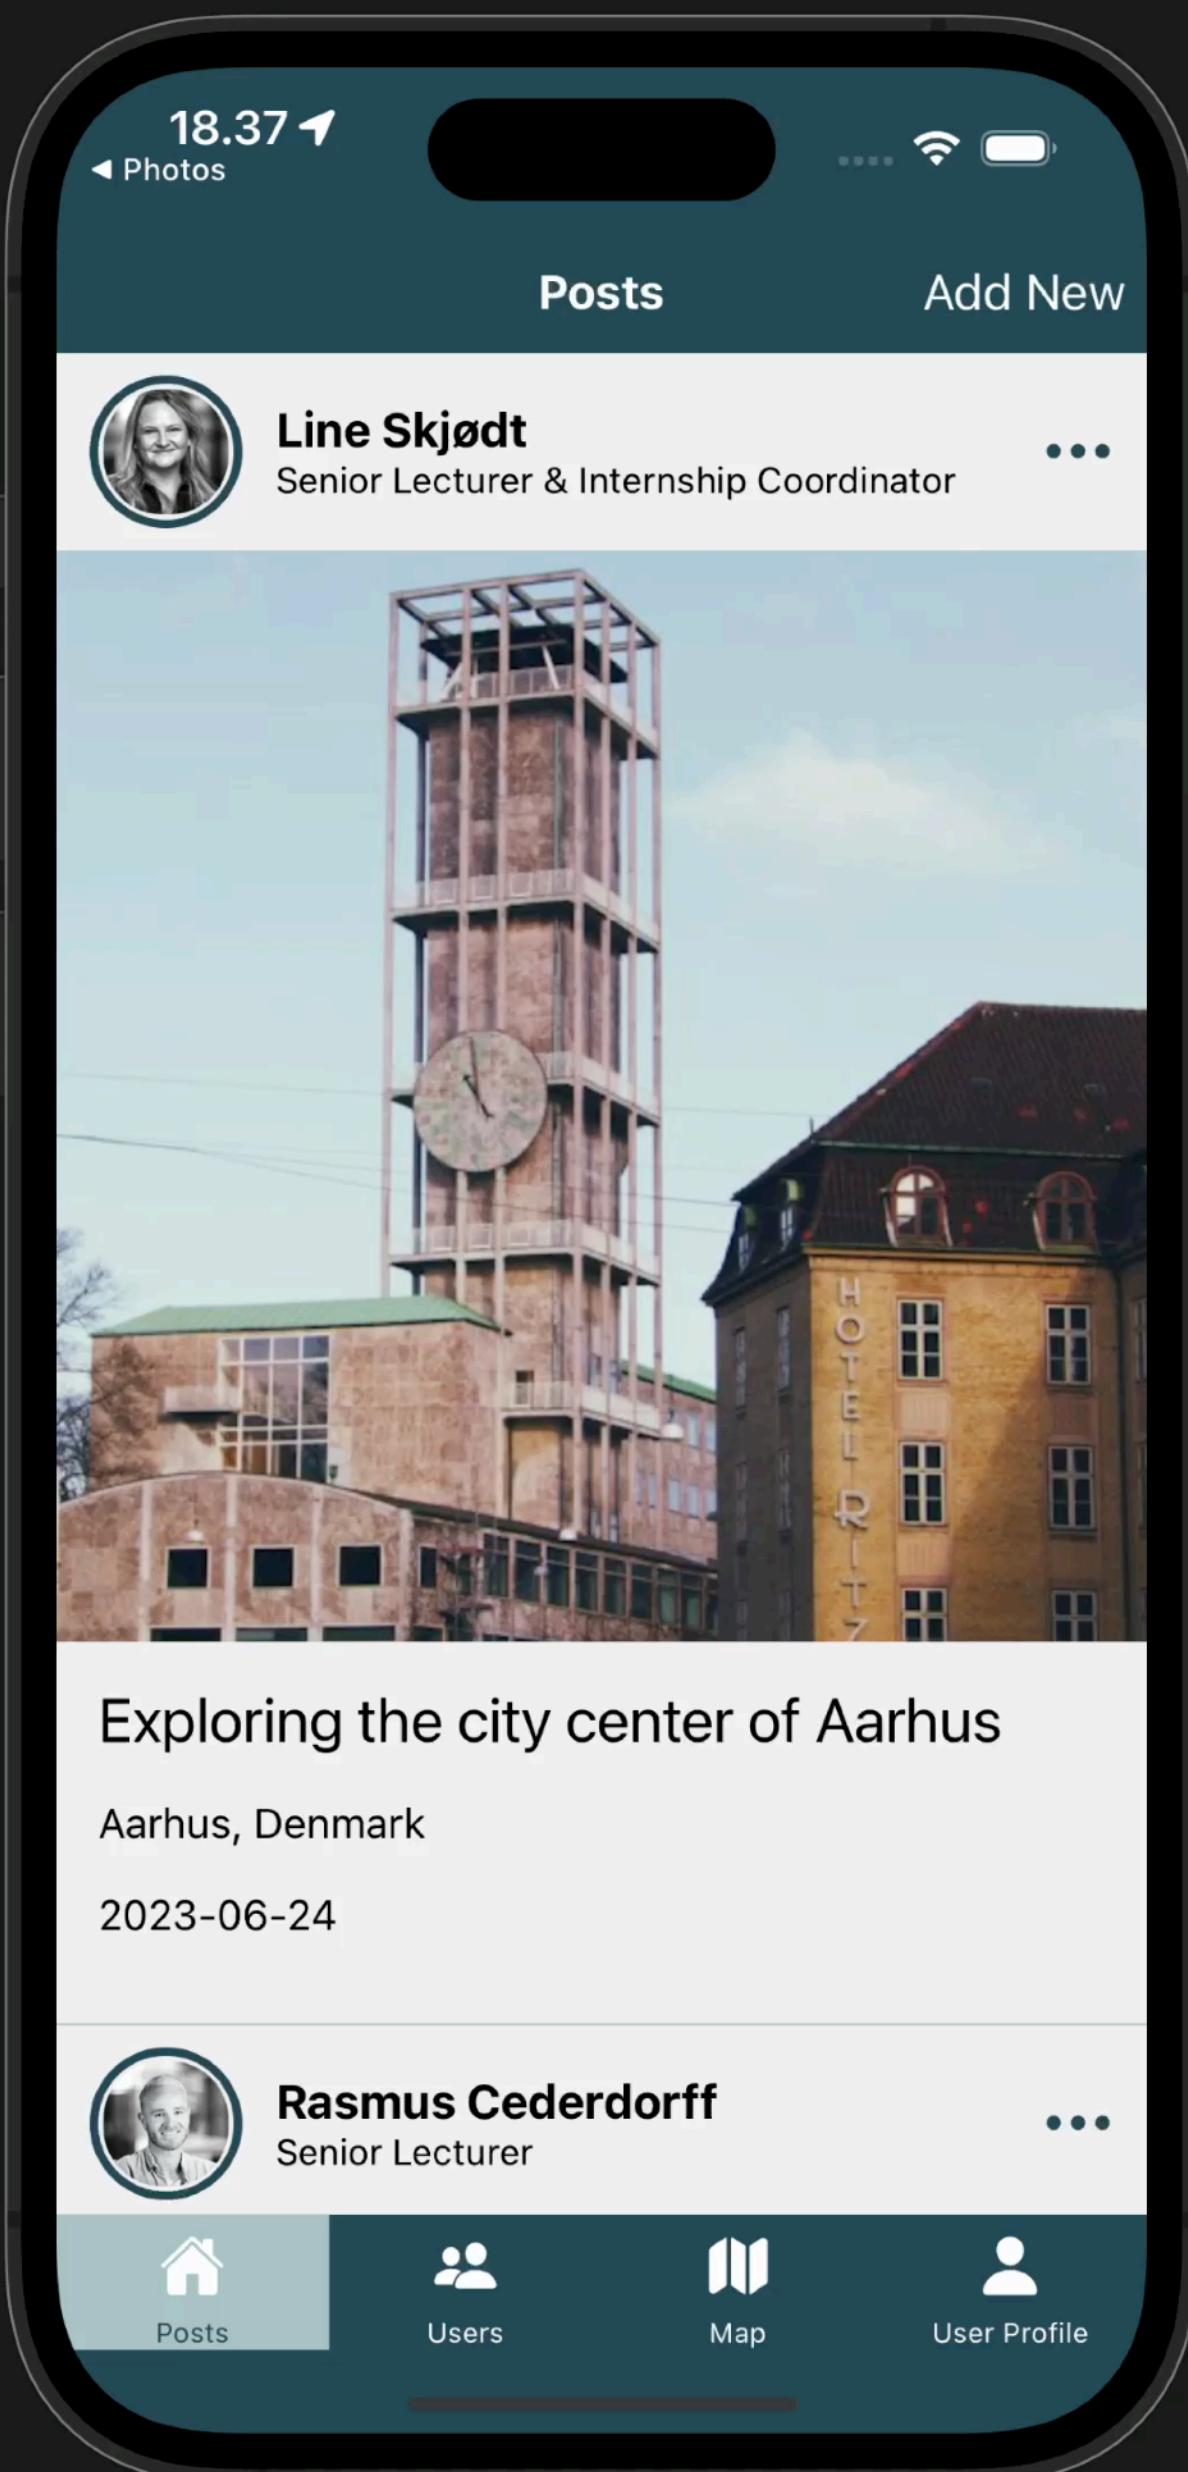

Posts

	<input type="checkbox"/> id	<input type="checkbox"/> caption	<input type="checkbox"/> image	<input type="checkbox"/> createdAt	<input type="checkbox"/> createdBy
1	1	Beautiful sunset at the beach	https://images.unsplash.com/photo-1566241832378-917a0f30db2c?ixlib=rb-4.0.3	2023-09-13 17:08:22	2
2	2	Exploring the city streets of Aarhus	https://images.unsplash.com/photo-1559070169-a3077159ee16?ixlib=rb-4.0.3	2023-09-13 17:08:22	4
3	3	Delicious food at the restaurant	https://images.unsplash.com/photo-1548940740-204726a19be3?ixlib=rb-4.0.3	2023-09-13 17:08:22	1
4	4	Exploring the city center of Aarhus	https://images.unsplash.com/photo-1612624629424-ddde915d3dc5?ixlib=rb-4.0.3	2023-09-13 17:08:22	2
5	5	A cozy morning with coffee	https://images.unsplash.com/photo-1545319261-f3760f9dd64d?ixlib=rb-4.0.3	2023-09-13 17:08:22	2
6	6	Serenity of the forest	https://images.unsplash.com/photo-1661505216710-32316e7b5bb3?ixlib=rb-4.0.3	2023-09-13 17:08:22	5
7	7	A beautiful morning in Aarhus	https://images.unsplash.com/photo-1573997953524-efed43db70a0?ixlib=rb-4.0.3	2023-09-13 17:08:22	5
8	8	Rainbow reflections of the city of Aarhus	https://images.unsplash.com/photo-1558443336-dbb3de50b8b2?ixlib=rb-4.0.3	2023-09-13 17:08:22	3

Users

	<input type="checkbox"/> id	<input type="checkbox"/> name	<input type="checkbox"/> mail	<input type="checkbox"/> title	<input type="checkbox"/> image
1	1	Maria Louise Bendixen	mlbe@eaaa.dk	Senior Lecturer	https://www.baaa.dk/media/b5ahrlra/maria-loui...
2	2	Rasmus Cederdorff	race@eaaa.dk	Senior Lecturer	https://share.cederdorff.com/images/race.jpg
3	3	Anne Kirketerp	anki@eaaa.dk	Head of Department	https://www.baaa.dk/media/5buh1xeo/anne-kirke...
4	4	Line Skjødt	lskj@eaaa.dk	Senior Lecturer & Internship Coord...	https://www.eaaa.dk/media/14qpfeq4/line-skjod...
5	5	Dan Okkels Brendstrup	dob@eaaa.dk	Lecturer	https://www.eaaa.dk/media/bdojel41/dan-okkels...

Entity Relationships

Posts

	id	caption	image	createdAt	createdBy
1	1	Beautiful sunset at the beach	https://images.unsplash.com/photo-1566241832378-917a0f30db2c?ixlib=	2023-09-13 17:08:22	2
2	2	Exploring the city streets of Aarhus	https://images.unsplash.com/photo-1559070169-a3077159ee16?ixlib=	2023-09-13 17:08:22	4
3	3	Delicious food at the restaurant	https://images.unsplash.com/photo-1548940740-204726a19be3?ixlib=	2023-09-13 17:08:22	1
4	4	Exploring the city center of Aarhus	https://images.unsplash.com/photo-1612624629424-ddde915d3dc5?ixlib=	2023-09-13 17:08:22	2
5	5	A cozy morning with coffee	https://images.unsplash.com/photo-1545319261-f3760f9dd64d?ixlib=	2023-09-13 17:08:22	2
6	6	Serenity of the forest	https://images.unsplash.com/photo-1661505216710-32316e7b5bb3?ixlib=	2023-09-13 17:08:22	5
7	7	A beautiful morning in Aarhus	https://images.unsplash.com/photo-1573997953524-efed43db70a0?ixlib=	2023-09-13 17:08:22	5
8	8	Rainbow reflections of the city of Aarhus	https://images.unsplash.com/photo-1558443336-dbb3de50b8b2?ixlib=	2023-09-13 17:08:22	3

Foreign key


- The foreign links posts createdBy column to users table's primary key.
- It establishes a relationship between posts and users

Users

	id	name	mail	title	image
1	1	Maria Louise Bendixen	mlbe@eaaa.dk	Senior Lecturer	https://www.baaa.dk/media/b5ahrlra/maria-loui...
2	2	Rasmus Cederdorff	race@eaaa.dk	Senior Lecturer	https://share.cederdorff.com/images/race.jpg
3	3	Anne Kirketerp	anki@eaaa.dk	Head of Department	https://www.baaa.dk/media/5buh1xeo/anne-kirke...
4	4	Line Skjødt	lskj@eaaa.dk	Senior Lecturer & Internship Coord...	https://www.eaaa.dk/media/14qpfeq4/line-skjod...
5	5	Dan Okkels Brendstrup	dob@eaaa.dk	Lecturer	https://www.eaaa.dk/media/bdojel41/dan-okkels...

Entity Relationships

One to many

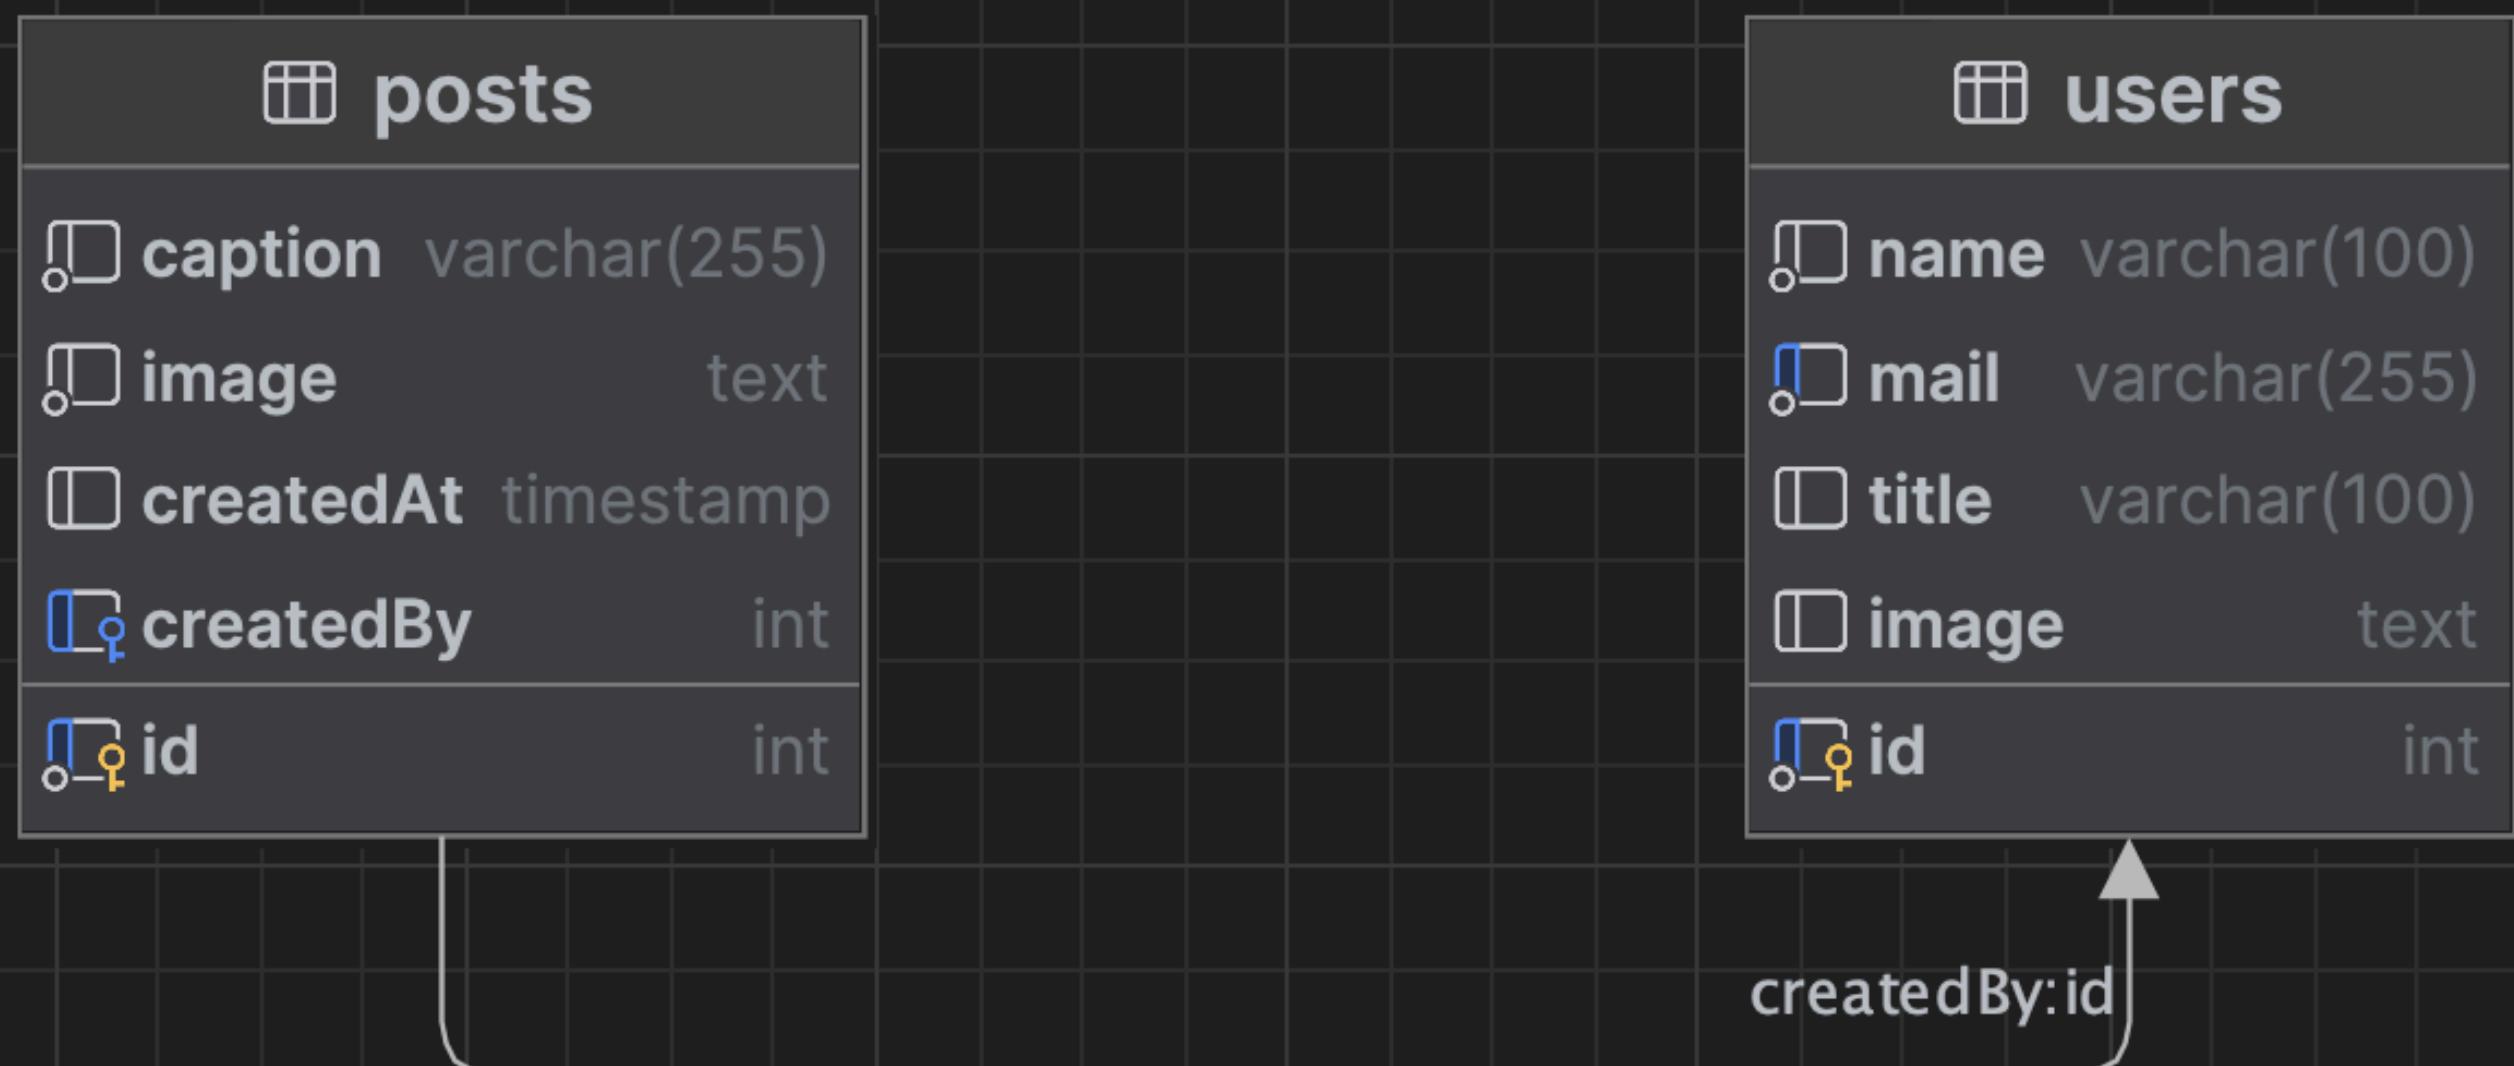

One to many

Posts

	id	caption	image	createdAt	createdBy
1	1	Beautiful sunset at the beach	https://images.unsplash.com/photo-1566241832378-917a0f30db2c?ixlib=rb-4.0.3	2023-09-13 17:08:22	2
2	2	Exploring the city streets of Aarhus	https://images.unsplash.com/photo-1559070169-a3077159ee16?ixlib=rb-4.0.3	2023-09-13 17:08:22	4
3	3	Delicious food at the restaurant	https://images.unsplash.com/photo-1548940740-204726a19be3?ixlib=rb-4.0.3	2023-09-13 17:08:22	1
4	4	Exploring the city center of Aarhus	https://images.unsplash.com/photo-1612624629424-ddde915d3dc5?ixlib=rb-4.0.3	2023-09-13 17:08:22	2
5	5	A cozy morning with coffee	https://images.unsplash.com/photo-1545319261-f3760f9dd64d?ixlib=rb-4.0.3	2023-09-13 17:08:22	2
6	6	Serenity of the forest	https://images.unsplash.com/photo-1661505216710-32316e7b5bb3?ixlib=rb-4.0.3	2023-09-13 17:08:22	5
7	7	A beautiful morning in Aarhus	https://images.unsplash.com/photo-1573997953524-efed43db70a0?ixlib=rb-4.0.3	2023-09-13 17:08:22	5
8	8	Rainbow reflections of the city of Aarhus	https://images.unsplash.com/photo-1558443336-db3de50b8b2?ixlib=rb-4.0.3	2023-09-13 17:08:22	3

Users

	id	name	mail	title	image
1	1	Maria Louise Bendixen	mlbe@aaaa.dk	Senior Lecturer	https://www.baaa.dk/media/b5ahr1ra/maria-loui...
2	2	Rasmus Cederdorff	race@aaaa.dk	Senior Lecturer	https://share.cederdorff.com/images/race.jpg
3	3	Anne Kirketerp	anki@aaaa.dk	Head of Department	https://www.baaa.dk/media/5buh1xeo/anne-kirke...
4	4	Line Skjødt	lskj@aaaa.dk	Senior Lecturer & Internship Coord.	https://www.eaaa.dk/media/14qpfeq4/line-skjod...
5	5	Dan Okkels Brendstrup	dob@aaaa.dk	Lecturer	https://www.eaaa.dk/media/bdoje141/dan-okkels...

```
CREATE TABLE users (
```


```
    id INT AUTO_INCREMENT PRIMARY KEY,  
    name VARCHAR(100) NOT NULL,  
    mail VARCHAR(255) UNIQUE NOT NULL,  
    title VARCHAR(100),  
    image TEXT  
);
```

```
CREATE TABLE posts(
```

```
    id INT AUTO_INCREMENT PRIMARY KEY,  
    caption VARCHAR(255) NOT NULL,  
    image TEXT NOT NULL,  
    createdAt TIMESTAMP DEFAULT CURRENT_TIMESTAMP,  
    createdBy INT,  
    FOREIGN KEY (createdBy) REFERENCES users(id)  
);
```

Entity Relationships

Many to many

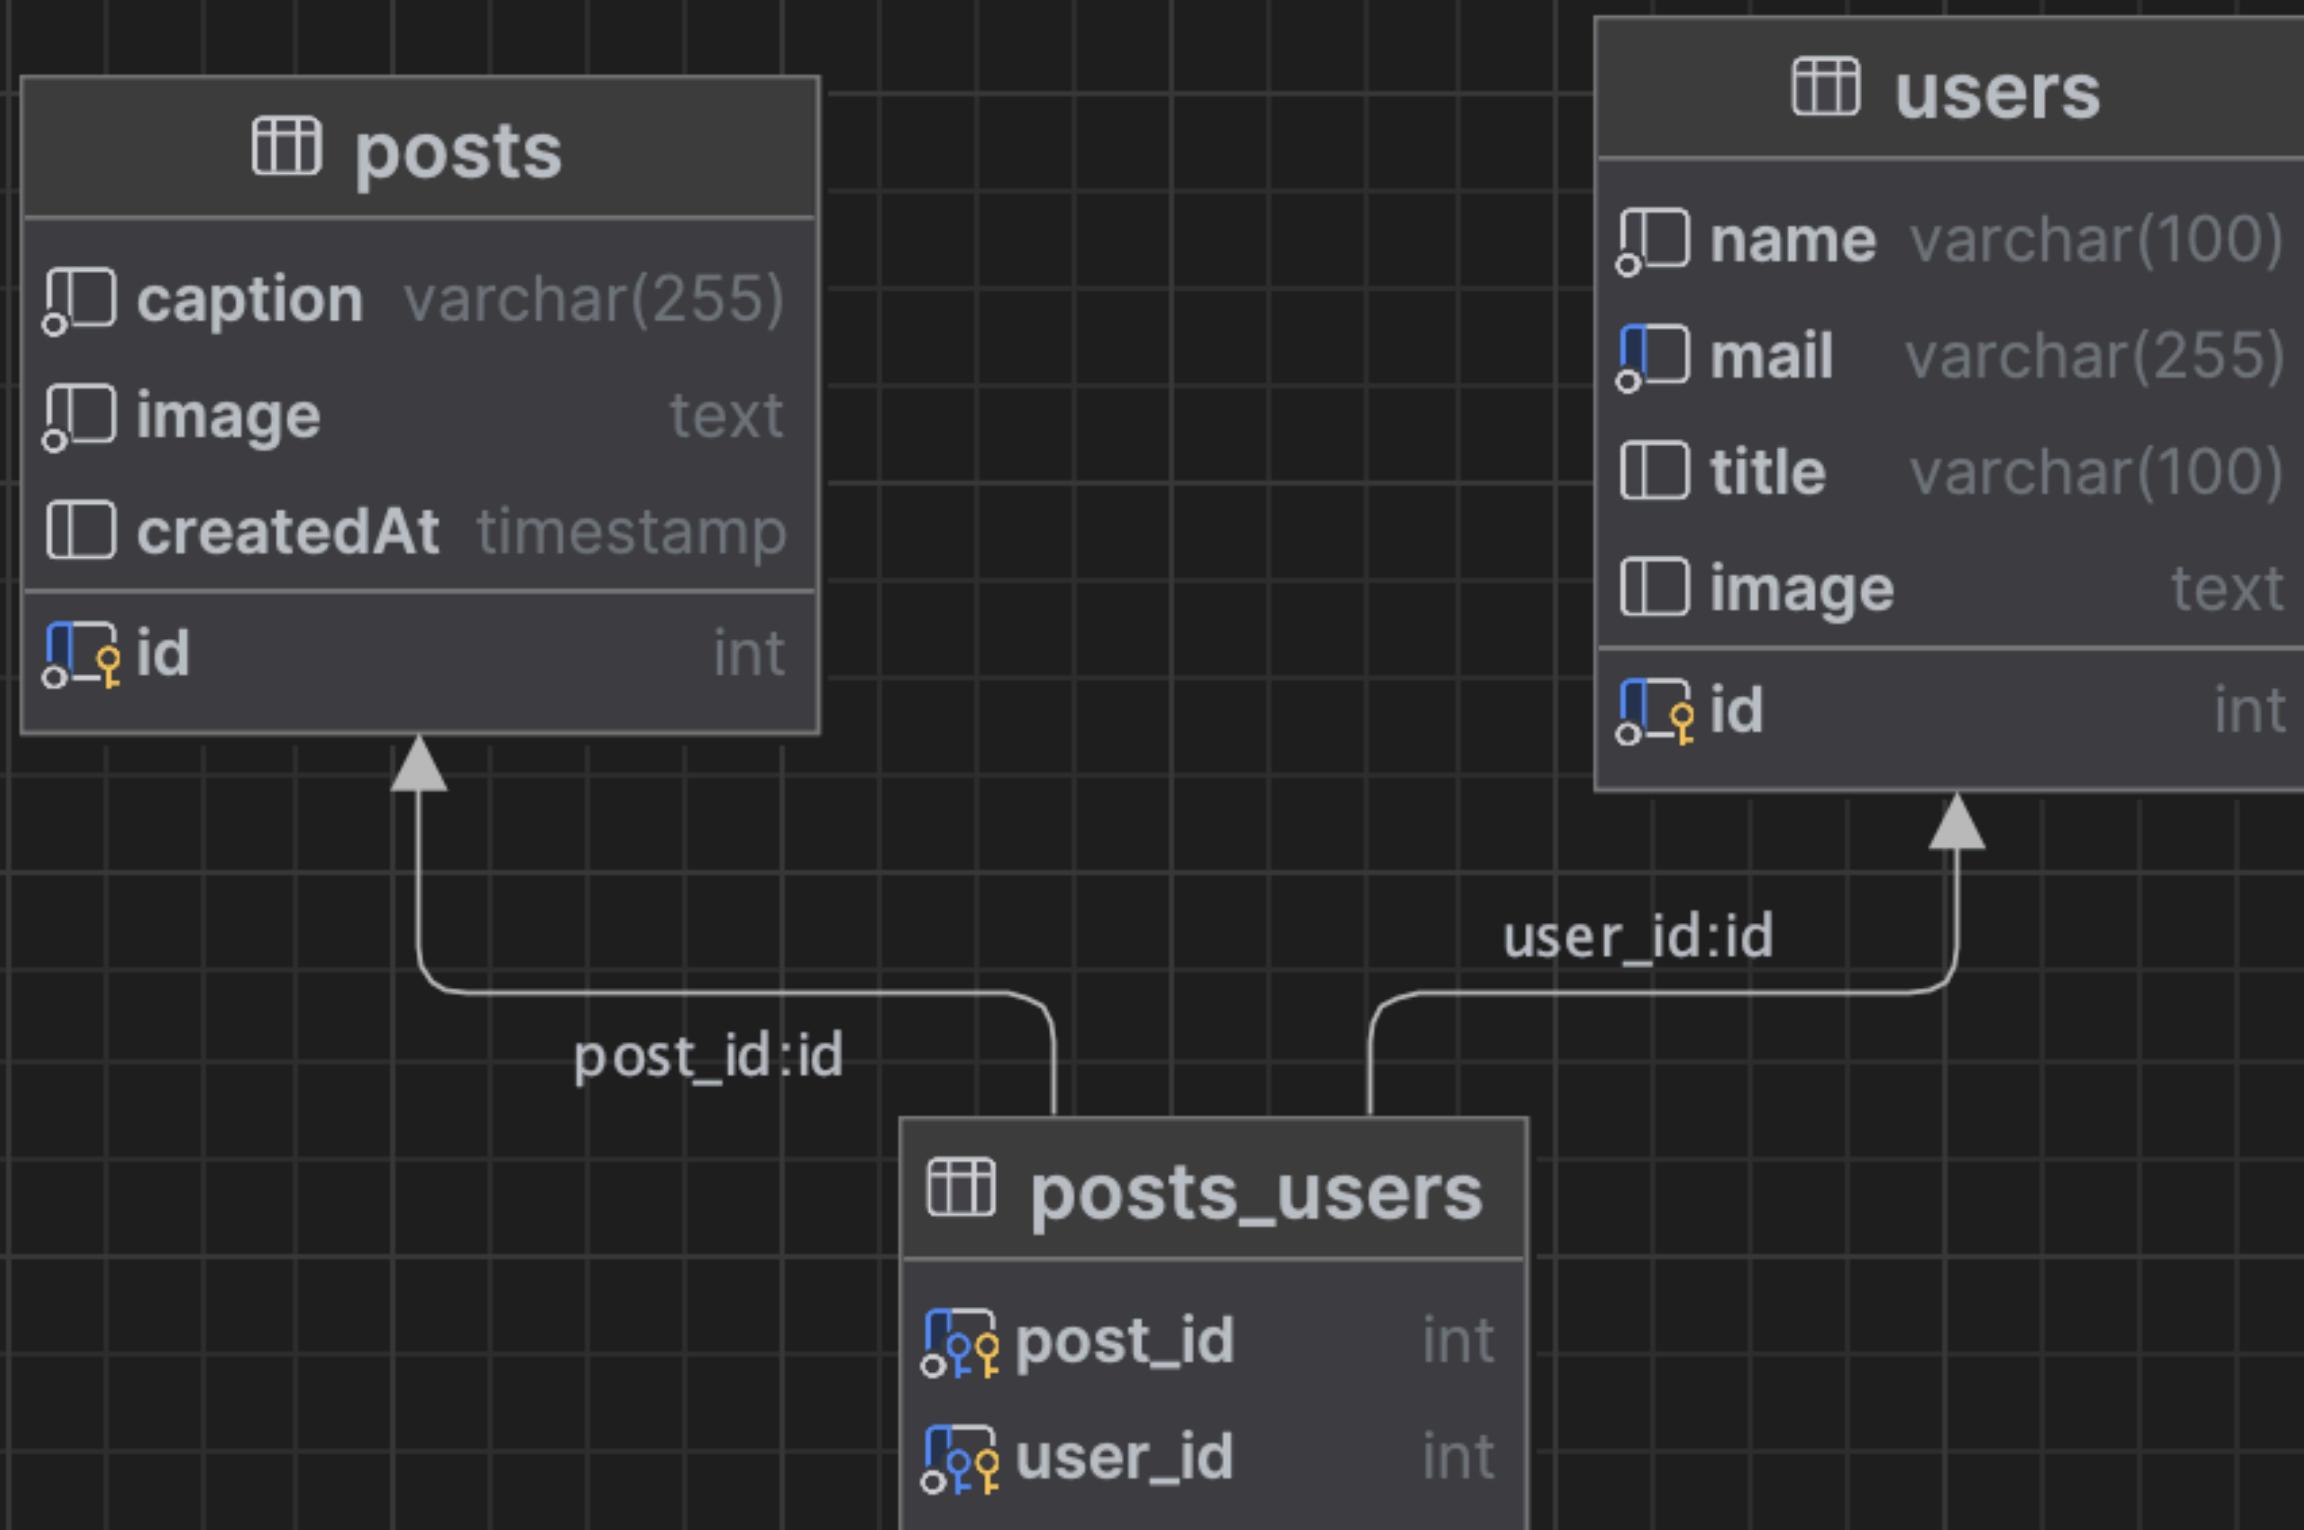

Junction Table

posts_users

	post_id	user_id
1	2	1
2	1	2
3	2	2
4	1	4
5	2	5
6	4	5

posts

	id	caption	image	createdAt
1	1	Beautiful sunset at the beach	https://images.unsplash.com/photo-1566241832378-917a0f30db2c?ixlib=rb-4.0.3&ixid...	2023-09-13 16:51:07
2	2	Exploring the city streets of Aarhus	https://images.unsplash.com/photo-1559070169-a3077159ee16?ixlib=rb-4.0.3&ixid...	2023-09-13 16:51:07
3	3	Delicious food at the restaurant	https://images.unsplash.com/photo-1548940740-204726a19be3?ixlib=rb-4.0.3&ixid...	2023-09-13 16:51:07
4	4	Exploring the city center of Aarhus	https://images.unsplash.com/photo-1612624629424-ddde915d3dc5?ixlib=rb-4.0.3&ixid...	2023-09-13 16:51:07
5	5	A cozy morning with coffee	https://images.unsplash.com/photo-1545319261-f3760f9dd64d?ixlib=rb-4.0.3&ixid...	2023-09-13 16:51:07
6	6	Serenity of the forest	https://images.unsplash.com/photo-1661505216710-32316e7b5bb3?ixlib=rb-4.0.3&ixid...	2023-09-13 16:51:07
7	7	A beautiful morning in Aarhus	https://images.unsplash.com/photo-1573997953524-efed43db70a0?ixlib=rb-4.0.3&ixid...	2023-09-13 16:51:07
8	8	Rainbow reflections of the city of Aarhus	https://images.unsplash.com/photo-1558443336-dbb3de50b8b2?ixlib=rb-4.0.3&ixid...	2023-09-13 16:51:07

users

	id	name	mail	title	image
1	1	Maria Louise Bendixen	mlbe@eaaa.dk	Senior Lecturer	https://www.baaa.dk/media/b5ahrlra/maria-loui...
2	2	Rasmus Cederdorff	race@eaaa.dk	Senior Lecturer	https://share.cederdorff.com/images/race.jpg
3	3	Anne Kirketerp	anki@eaaa.dk	Head of Department	https://www.baaa.dk/media/5buh1xeo/anne-kirke...
4	4	Line Skjødt	lskj@eaaa.dk	Senior Lecturer & Internship Coord...	https://www.eaaa.dk/media/14qpfeq4/line-skjod...
5	5	Dan Okkels Brendstrup	dob@eaaa.dk	Lecturer	https://www.eaaa.dk/media/bdojel41/dan-okkels...

Junction Table

posts_users

	post_id	user_id
1	2	1
2	1	2
3	2	2
4	1	4
5	2	5
6	4	5

posts

	id	caption	image	createdAt
1	1	Beautiful sunset at the beach	https://images.unsplash.com/photo-15442183278117e0530b2c21xlib=rb-4.0.3&ix...	2023-09-13 16:51:07
2	2	Fishing boat in the harbor	https://images.unsplash.com/photo-15442183671117e0530b2c21xlib=rb-4.0.3&ix...	2023-09-13 16:51:07
3	3	Delicious food at the restaurant	https://images.unsplash.com/photo-1548940740-204726a19be3?ixlib=rb-4.0.3&ixid...	2023-09-13 16:51:07
4	4	Exploring the city center of Aarhus	https://images.unsplash.com/photo-1612624629424-ddde915d3dc5?ixlib=rb-4.0.3&ixid...	2023-09-13 16:51:07
5	5	A cozy morning with coffee	https://images.unsplash.com/photo-1543122411-f7760f9dd4?ixlib=rb-4.0.3&ixid...	2023-09-13 16:51:07
6	6	Serenity on the lake	https://images.unsplash.com/photo-1561521523167b7bb7?ixlib=rb-4.0.3&ixid...	2023-09-13 16:51:07
7	7	A beautiful morning in Aarhus	https://images.unsplash.com/photo-1573997953524-efed43db70a0?ixlib=rb-4.0.3&ixid...	2023-09-13 16:51:07
8	8	Rainbow reflections of the city of Aarhus	https://images.unsplash.com/photo-1558443336-dbb3de50b8b2?ixlib=rb-4.0.3&ixid...	2023-09-13 16:51:07

A junction table contains the primary key columns of two related tables, facilitating many-to-many relationships between them.

	id	name	mail	title	image
1	1	Maria Louise Bendixen	mlbe@aaaa.dk	Senior Lecturer	https://www.baaa.dk/media/b5ahrlra/maria-loui...
2	2	Rasmus Cederdorff	race@aaaa.dk	Senior Lecturer	https://share.cederdorff.com/images/race.jpg
3	3	Anne Kirketerp	anki@aaaa.dk	Head of Department	https://www.baaa.dk/media/5buh1xeo/anne-kirke...
4	4	Line Skjødt	lskj@aaaa.dk	Senior Lecturer & Internship Coord.	https://www.eaaa.dk/media/14qpfeq4/line-skjod...
5	5	Dan Okkels Brendstrup	dob@aaaa.dk	Lecturer	https://www.eaaa.dk/media/bdojel41/dan-okkels...

Many to many

posts

posts_users

	post_id	user_id
1	2	1
2	1	2
3	2	2
4	1	4
5	2	5
6	4	5

users

	id	name	mail
1	1	Maria Louise Bendixen	mlbe@eaaa
2	2	Rasmus Cederdorff	race@eaaa
3	3	Anne Kirketerp	anki@eaaa
4	4	Line Skjødt	lskj@eaaa
5	5	Dan Okkels Brendstrup	dob@eaaa


```
CREATE TABLE users (
    id INT AUTO_INCREMENT PRIMARY KEY,
    name VARCHAR(100) NOT NULL,
    mail VARCHAR(255) UNIQUE NOT NULL,
    title VARCHAR(100),
    image TEXT
);
```

```
CREATE TABLE posts(
    id INT AUTO_INCREMENT PRIMARY KEY,
    caption VARCHAR(255) NOT NULL,
    image TEXT NOT NULL,
    createdAt TIMESTAMP DEFAULT CURRENT_TIMESTAMP
);
```

```
-- Create a Junction Table to link posts and users
CREATE TABLE posts_users (
    post_id INT,
    user_id INT,
    PRIMARY KEY (post_id, user_id),
    FOREIGN KEY (post_id) REFERENCES posts(id),
    FOREIGN KEY (user_id) REFERENCES users(id)
);
```

Data Modeling and Schema Design



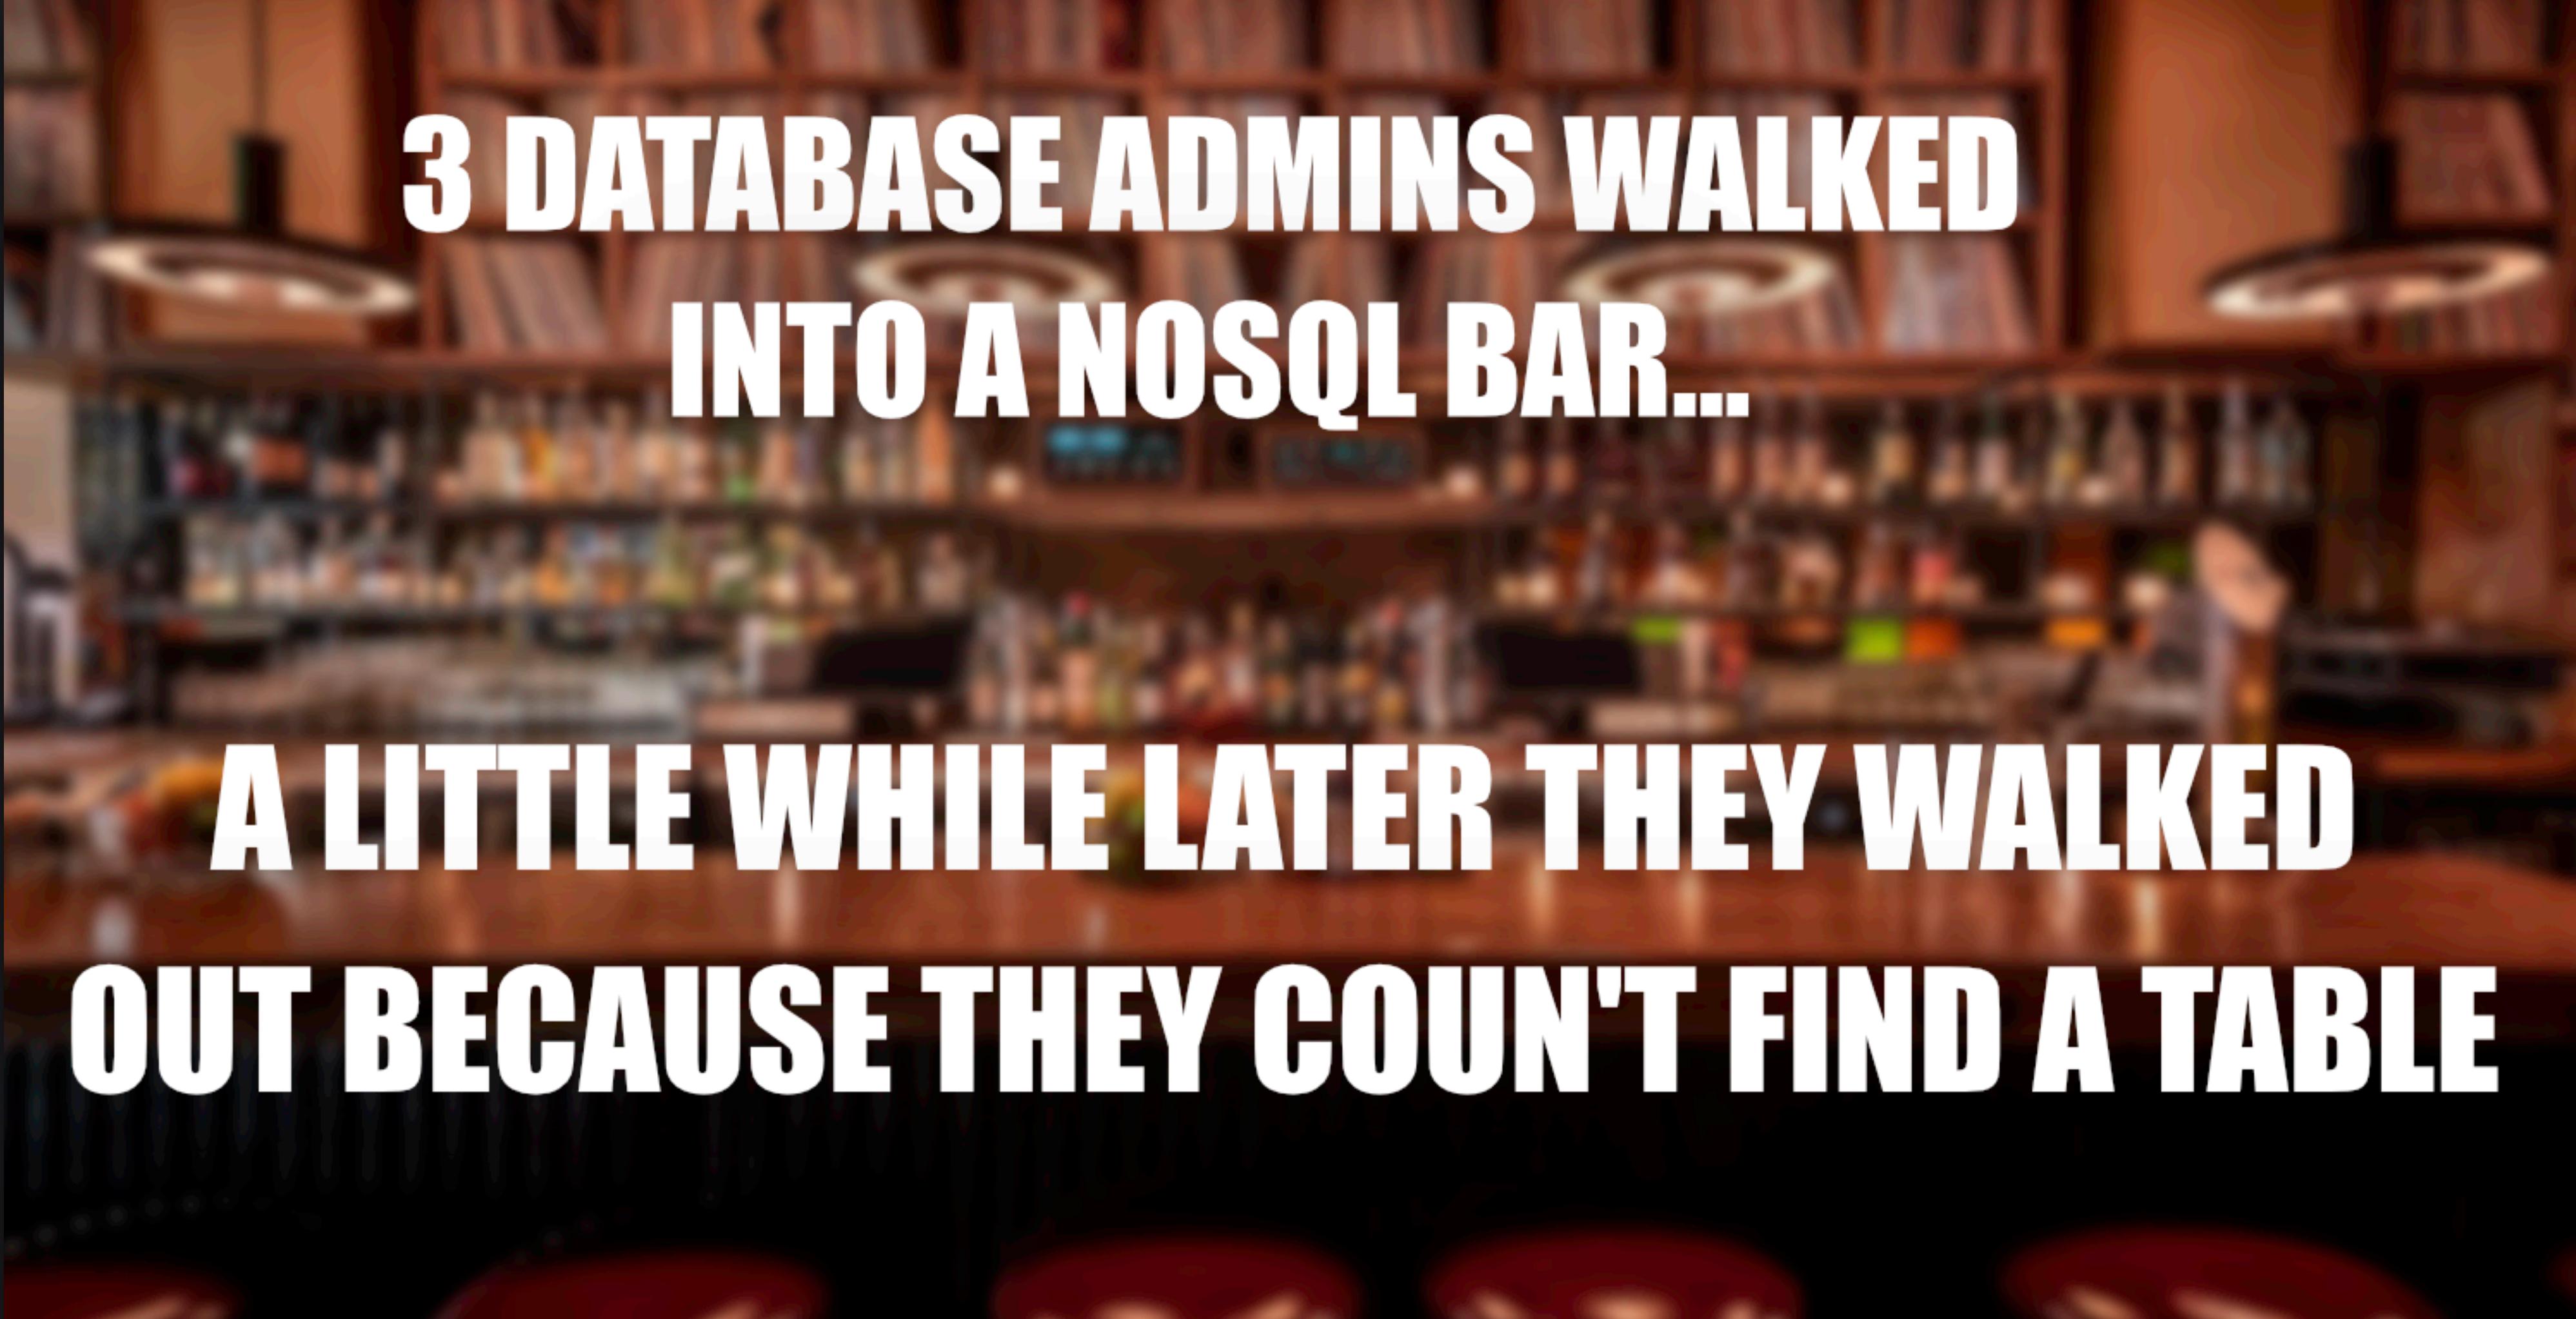

**3 DATABASE ADMINS WALKED
INTO A NOSQL BAR...**

**A LITTLE WHILE LATER THEY WALKED
OUT BECAUSE THEY COULDN'T FIND A TABLE**



Corporate needs you to find the differences
between this picture and this picture.

They're the same picture.

MongoDB Schema Design Best Practices

mongodb.com/developer/products/mongodb/mongodb-schema-design-best-practices/

MongoDB Products Resources Solutions Company Pricing Support Sign In Try Free

MongoDB Developer Topics Documentation Articles Tutorials Events Code Examples Podcasts MongoDB TV

MONGODB DEVELOPER CENTER > DEVELOPER TOPICS > PRODUCTS > MONGODB > TUTORIALS

MongoDB Schema Design Best Practices

 Joe Karlsson
11 min read • Published Jan 10, 2022 • Updated May 31, 2022

[MongoDB](#) [Schema](#)



Table of Contents

- Schema Design Approaches – Relational vs. MongoDB
- Embedding vs. Referencing
- Type of Relationships
- Additional Resources:

Rate this tutorial ☆ ☆ ☆ ☆ ☆

<https://www.mongodb.com/developer/products/mongodb/mongodb-schema-design-best-practices/>



MongoDB Schema Design

- No formal process
- No algorithms
- No rules






Schema Design

The design comes from the needs of the application first.

Therefore, the schema should evolve as the application changes.



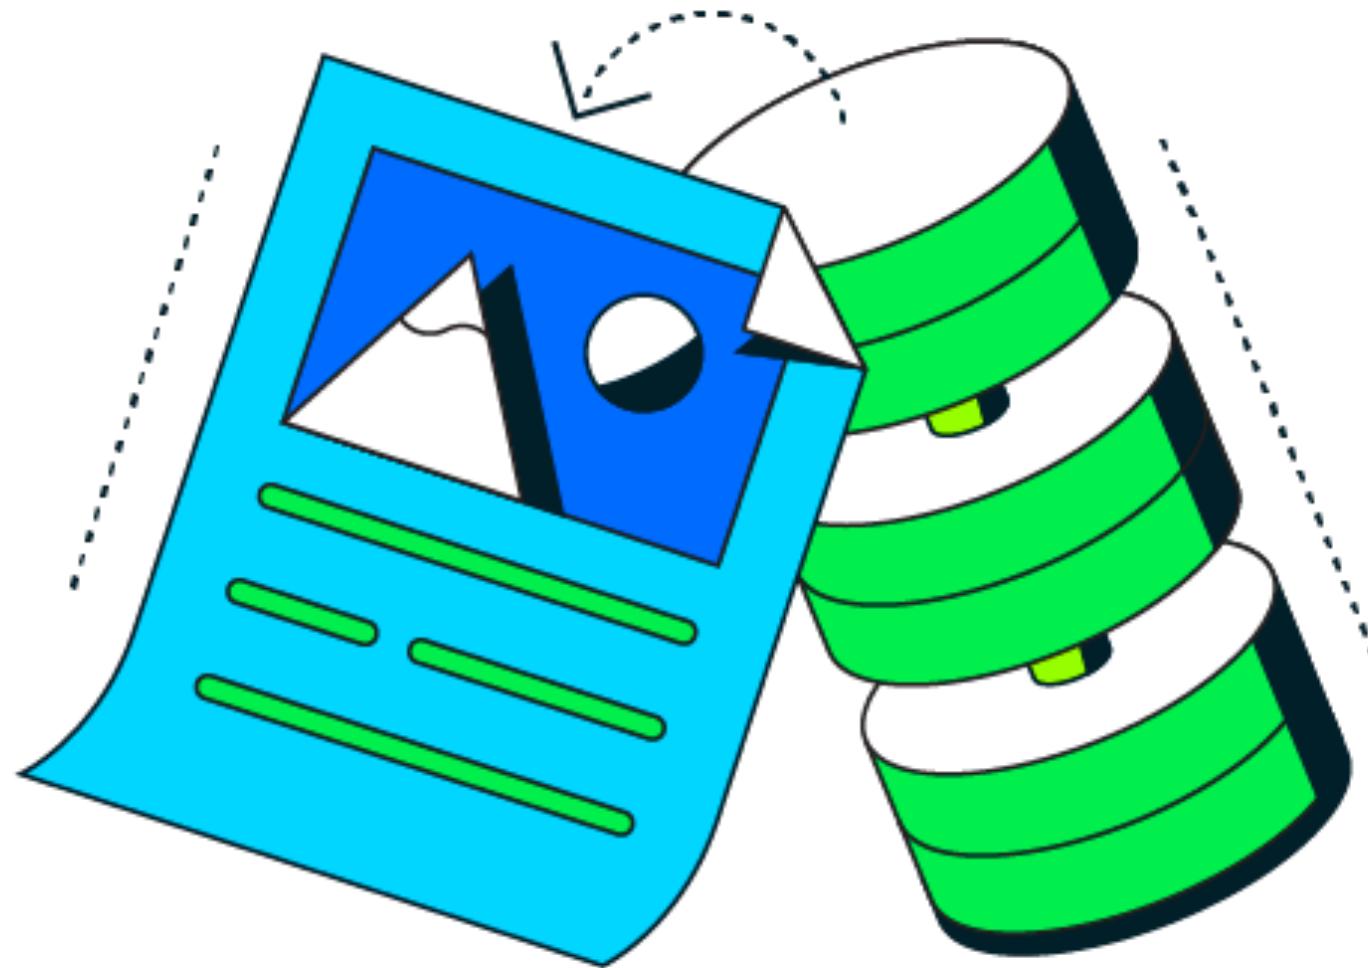


Data Modeling and the Document Model

The core of data modeling in the document model is to understand what data is needed by your queries. Once that information is known, can you begin designing the schema.



Data Modeling with MongoDB

- Several design possibilities
- Design for the usage pattern
- Evolving the schema is easy
- No migrations or downtime required for a new version of the schema

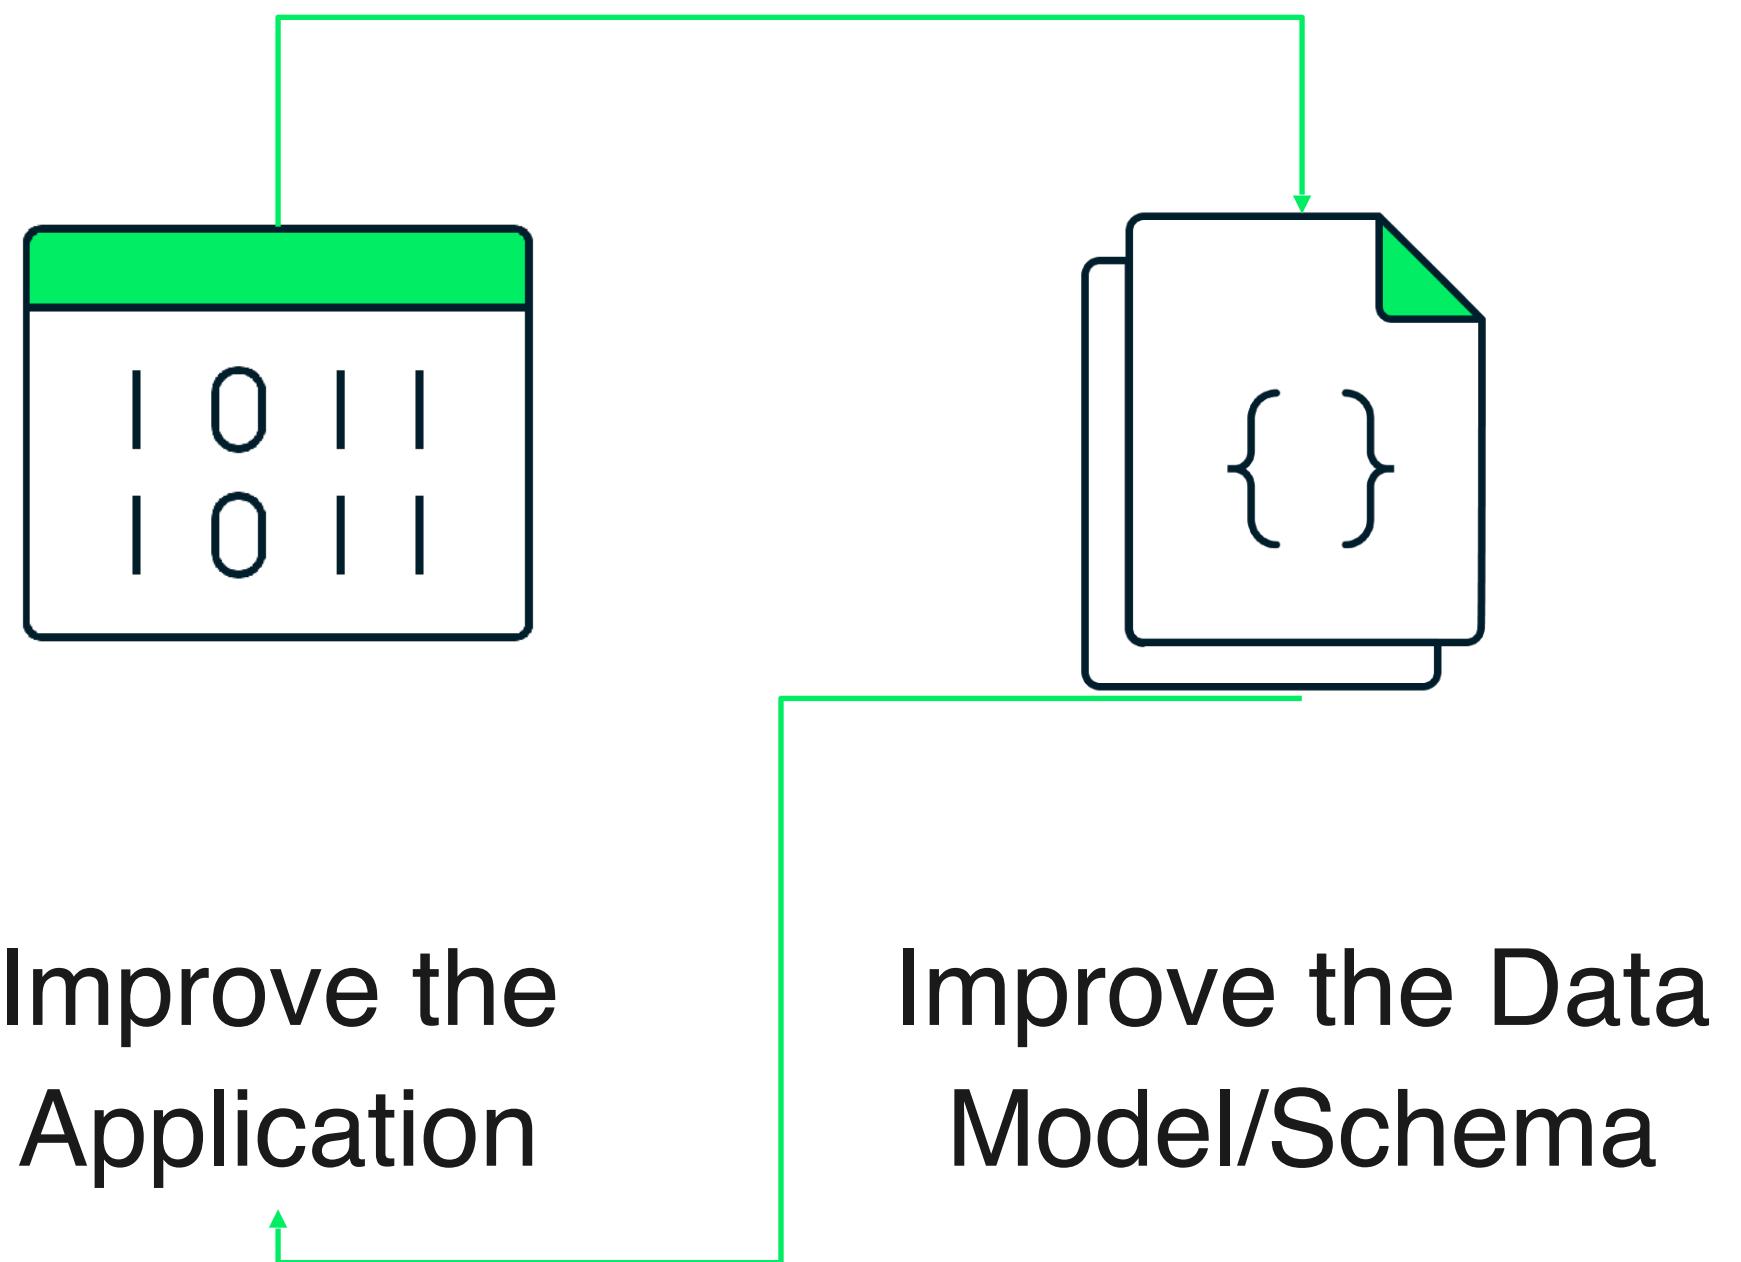



Schema Design: Considerations

- Your queries and the specific data your application requires.
- How your application reads the data (read patterns).
- How your application writes the data (write patterns).
- What are the relationships between your data (linked or embedded).






Schema Design - Link or Embed?

Embedded vs Linked relationship in the Post-Comment example

Embedded




Linked

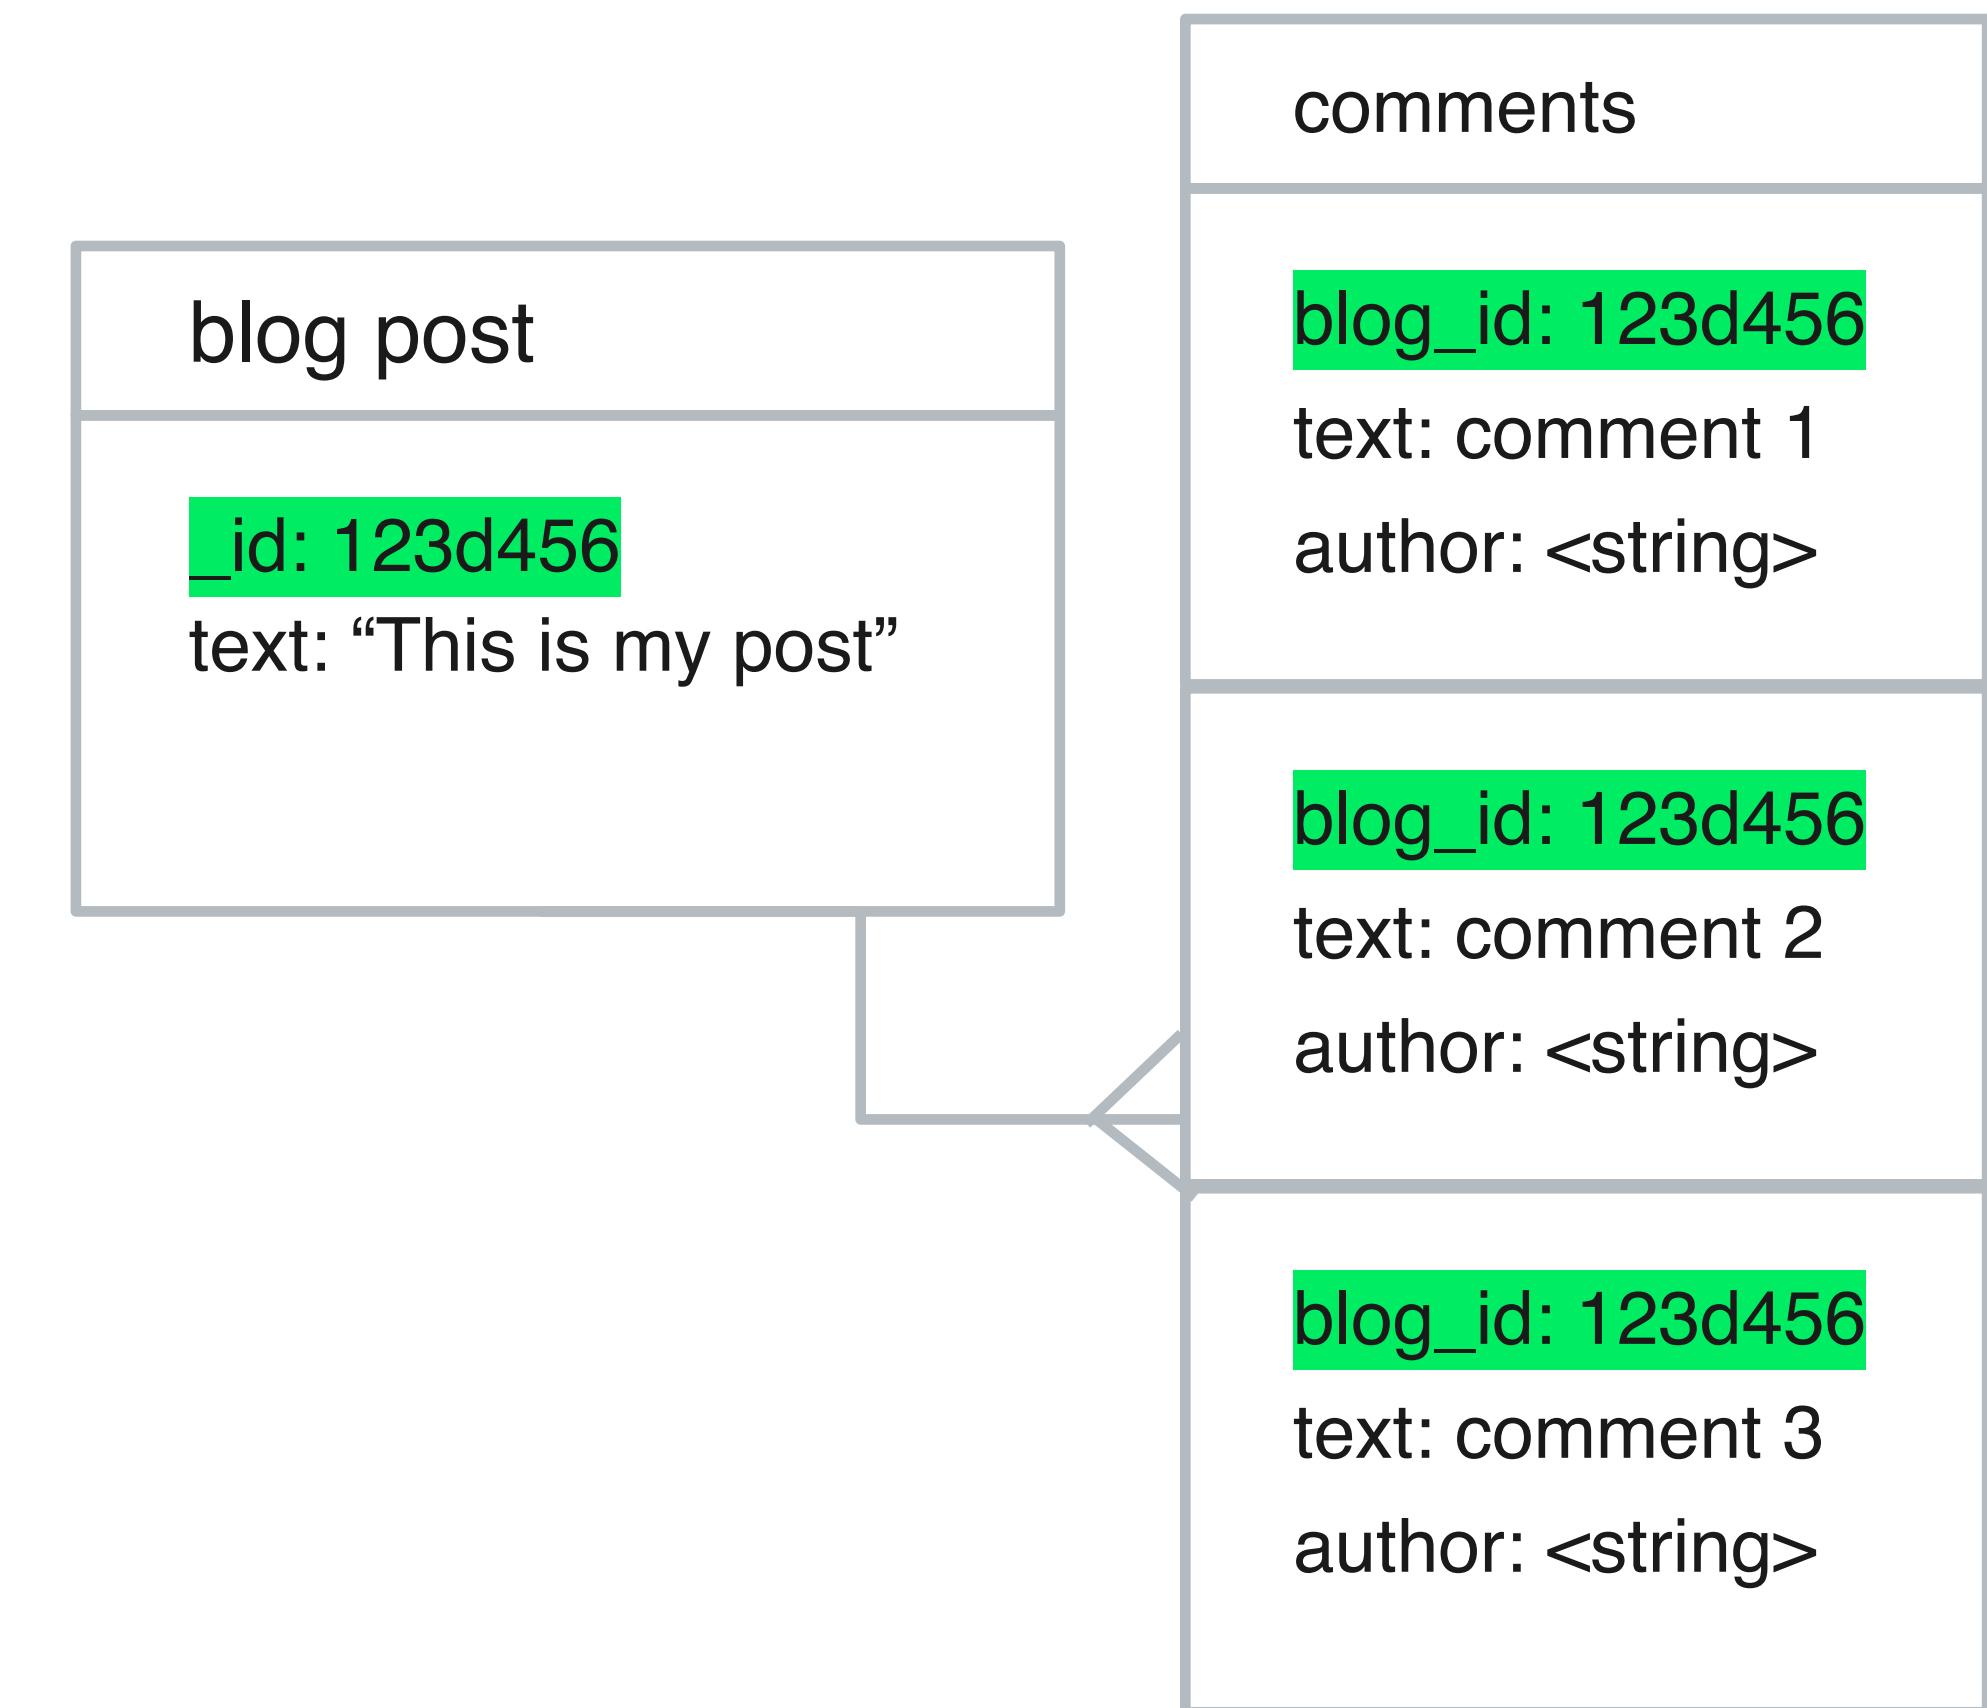



Schema Design - Link or Embed?


- Do I want most of the data's information embedded?
- Do I need to search within the embedded data?
- How frequently will the embedded data change?
- Is the embedded data shared or private?

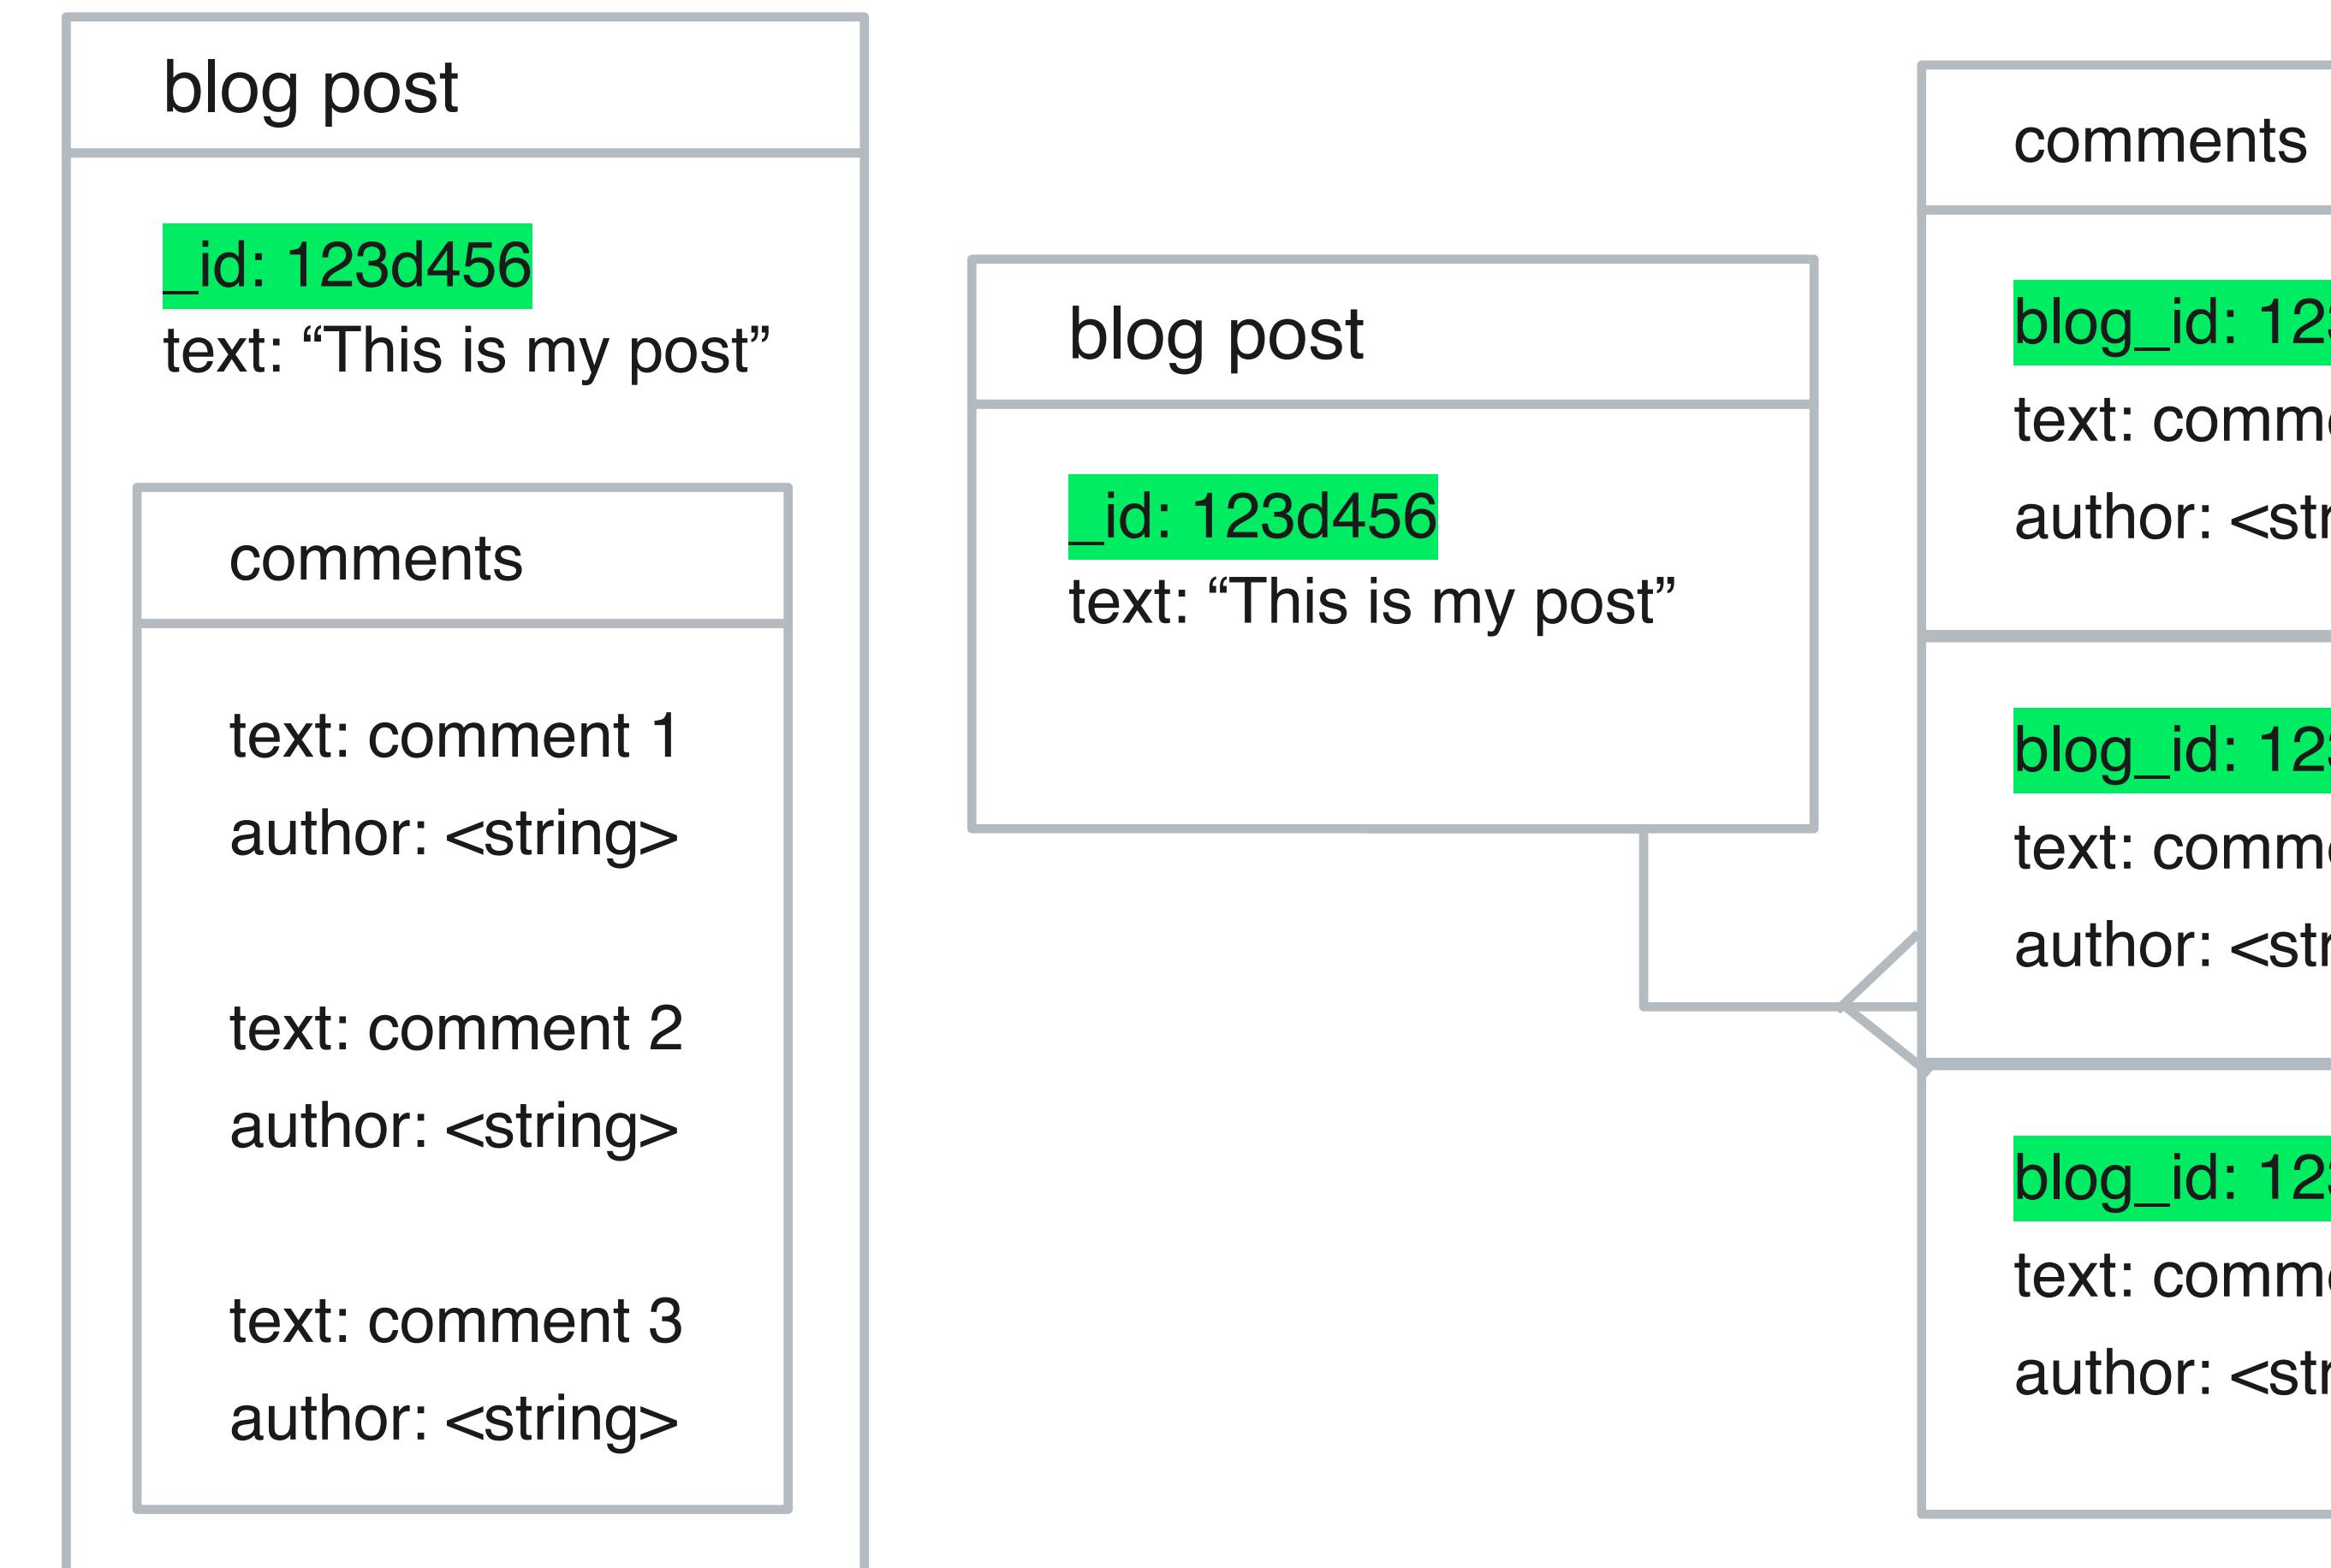



Example: Movies and Reviews

Embedded

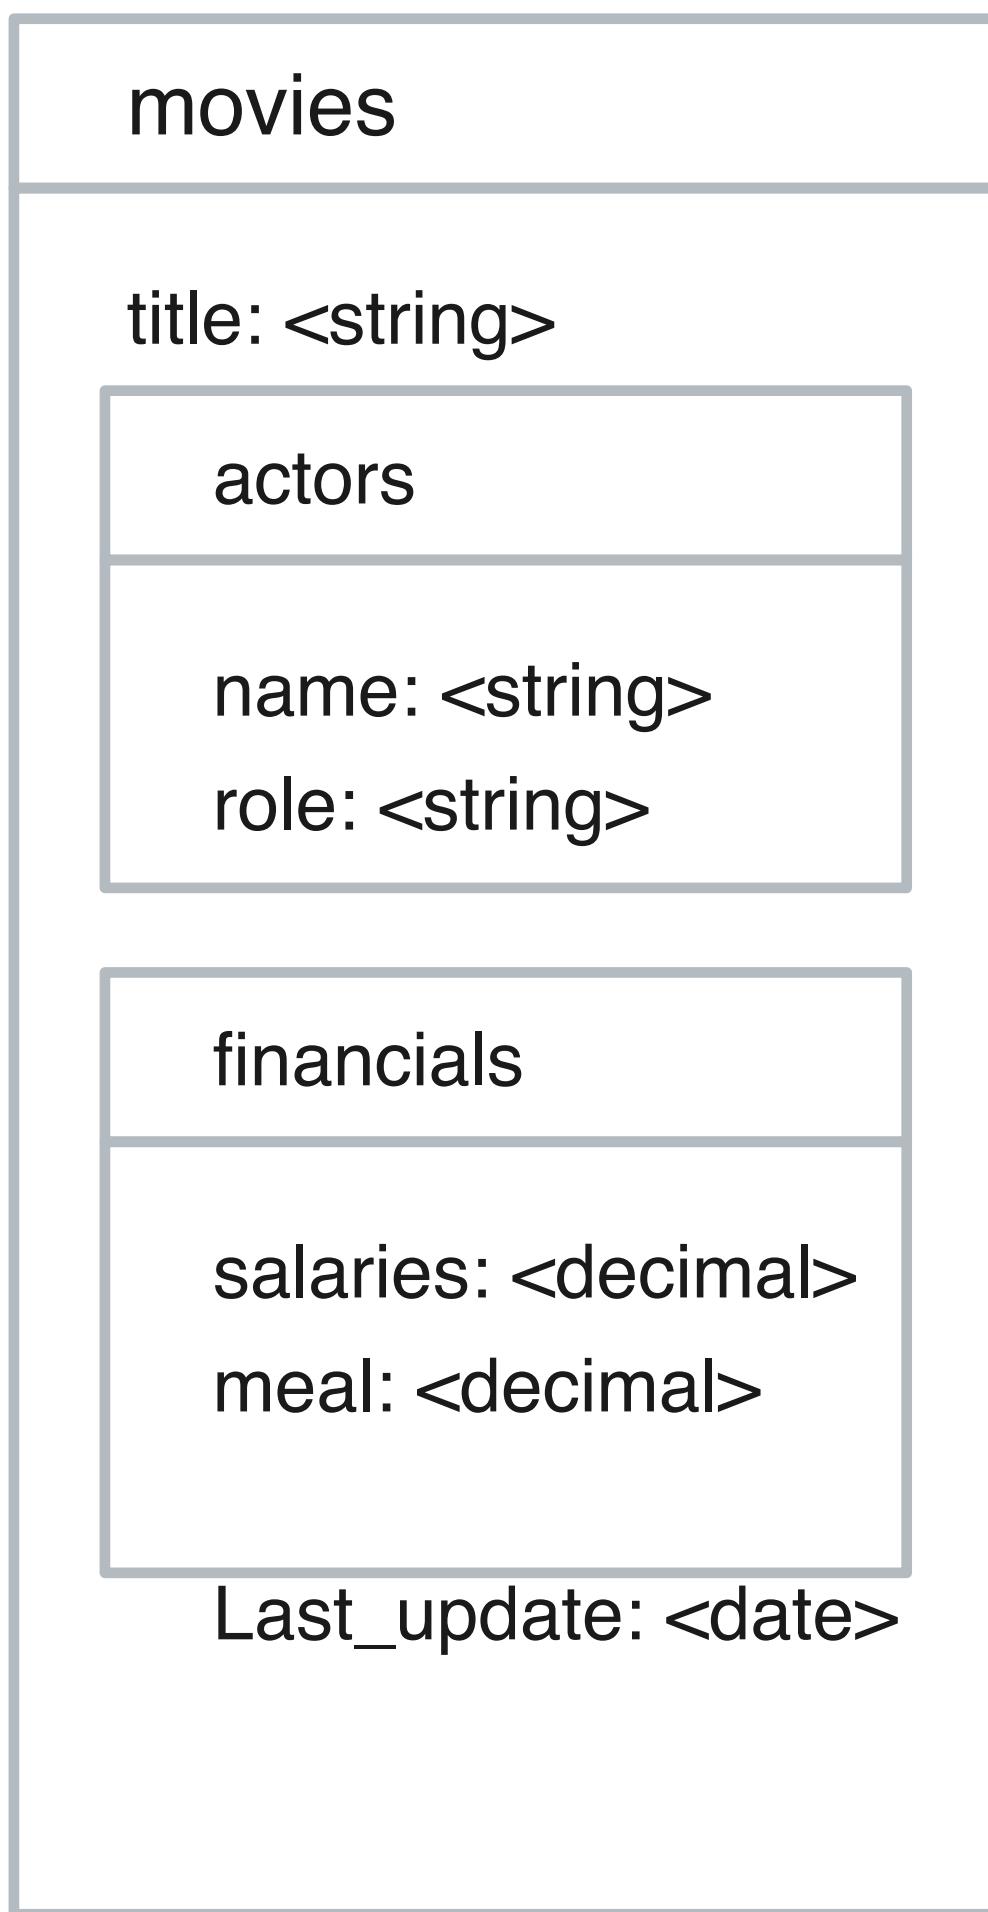

Linked



Relationships





One to one (1-1)

One to many (1-N)

Many to many (N-N)


Relationships and Data Modeling



Relationships

One-to-One (1-1)

A one-to-one relationship is represented and stored in a single document, this would typically be data like a person's name and the customer id.

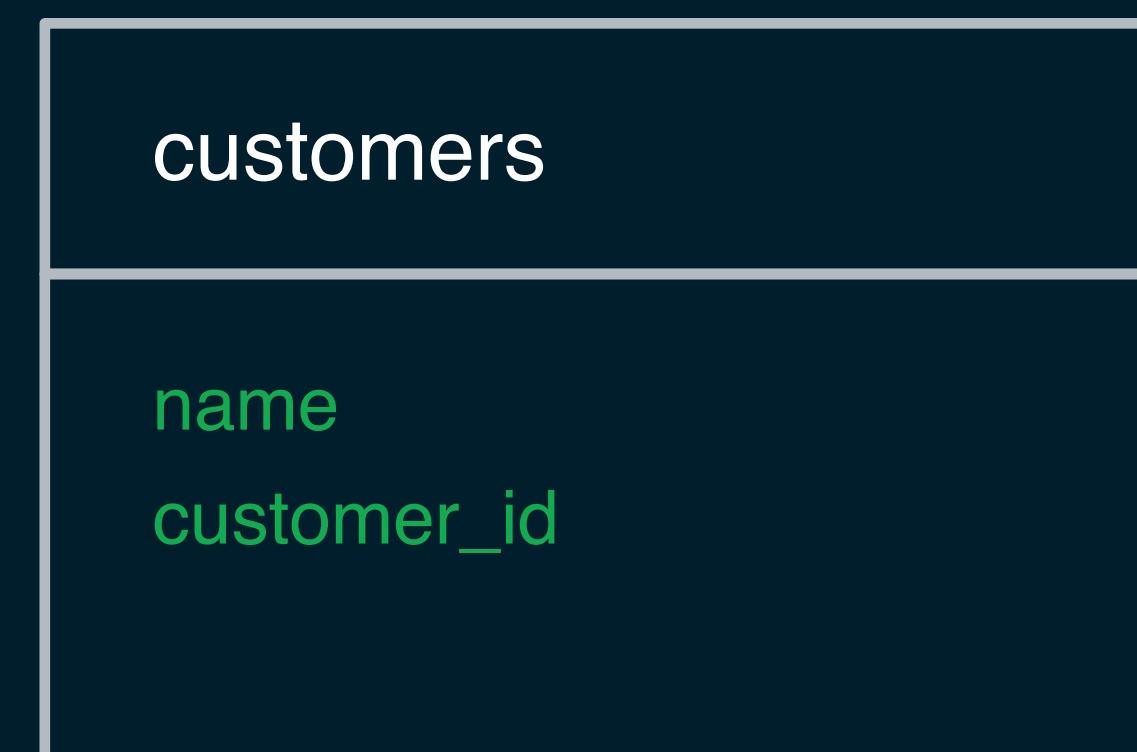



One to One (1 - 1)

Scenario:

You have to map patron and address relationships. In this example, you'll need to view one data entity in context of the other.

A screenshot of a web browser window displaying the MongoDB Schema Design Best Practices page. The URL in the address bar is mongodb.com/developer/products/mongodb/mongodb-schema-design-best-practices/. The page title is "MongoDB Schema Design Best Practices". The main content area features a section titled "One-to-One" with a text description and a code block. To the right, there is a "Table of Contents" sidebar.

One-to-One

Let's take a look at our User document. This example has some great one-to-one data in it. For example, in our system, one user can only have one name. So, this would be an example of a one-to-one relationship. We can model all one-to-one data as key-value pairs in our database.

```
1  {
2    "_id": "ObjectId('AAA')",
3    "name": "Joe Karlsson",
4    "company": "MongoDB",
5    "twitter": "@JoeKarlsson1",
6    "twitch": "joe_karlsson",
7    "tiktok": "joekarlsson",
8    "website": "joekarlsson.com"
9 }
```

Table of Contents

- Schema Design
- Approaches – Relational vs. MongoDB
- Embedding vs. Referencing
- Type of Relationships


Additional Resources:



Relationships

One-to-Many (1-N)

A one-to-many relationship can be considered when an object of a given type is associated with N objects of a second type.

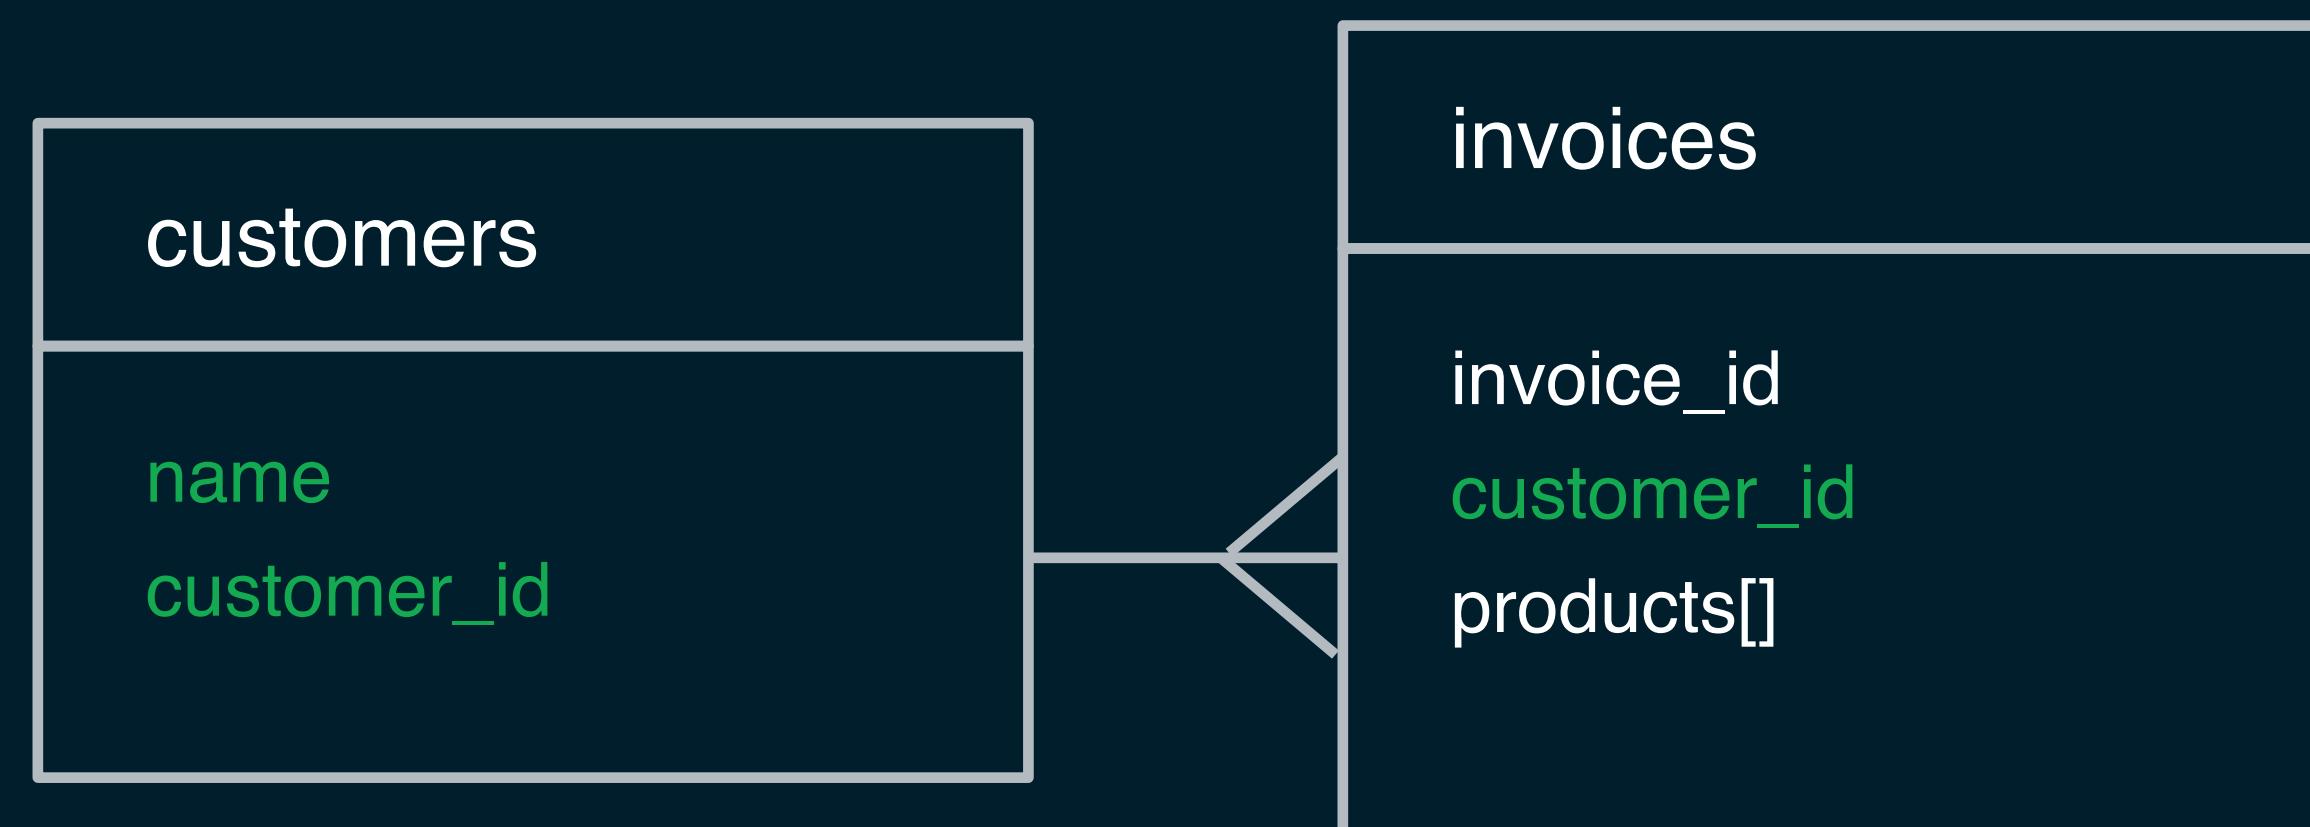



One to Many (1 - N)

Scenario (Link):

You have to map publisher and book relationships. Suppose you had the same publisher data for the same book. Embedding the [publisher] document inside the [book] document would lead to repetition of publisher information.

MongoDB Schema Design Best Practices

mongodb.com/developer/products/mongodb/mongodb-schema-design-best-practices/

MongoDB Developer Topics Documentation Articles Tutorials Events Code Examples Podcasts MongoDB TV

Products:

```
1  {
2      "name": "left-handed smoke shifter",
3      "manufacturer": "Acme Corp",
4      "catalog_number": "1234",
5      "parts": ["ObjectId('AAAA')", "ObjectId('BBBB')", "ObjectId('CCCC')"]
6 }
```

Parts:

```
1  {
2      "_id" : "ObjectId('AAAA')",
3      "partno" : "123-aff-456",
4      "name" : "#4 grommet",
5      "qty": "94",
6      "cost": "0.94",
7      "price": " 3.99"
8 }
```

Table of Contents

- Schema Design
- Approaches – Relational vs. MongoDB
- Embedding vs. Referencing
- Type of Relationships

Additional Resources:

MongoDB Schema Design Best Practices

mongodb.com/developer/products/mongodb/mongodb-schema-design-best-practices/

MongoDB Developer Topics Documentation Articles Tutorials Events Code Examples Podcasts MongoDB TV

Hosts:

```
1 {
  "_id": ObjectId("AAAB"),
  "name": "goofy.example.com",
  "ipaddr": "127.66.66.66"
}
```

Log Message:

```
1 {
  "time": ISODate("2014-03-28T09:42:41.382Z"),
  "message": "cpu is on fire!",
  "host": ObjectId("AAAB")
}
```

Table of Contents

- Schema Design
- Approaches – Relational vs. MongoDB
- Embedding vs. Referencing
- Type of Relationships

Additional Resources:



One to Many (1 - N)

Scenario (Embed):

You have to map a patron with multiple address relationships. In this one-to-many relationship between [patron] and [address] data, the [patron] has multiple [address] entities.

MongoDB Schema Design Best Practices

mongodb.com/developer/products/mongodb/mongodb-schema-design-best-practices/

MongoDB Developer Topics Documentation Articles Tutorials Events Code Examples Podcasts MongoDB TV

One-to-Few

Okay, now let's say that we are dealing a small sequence of data that's associated with our users. For example, we might need to store several addresses associated with a given user. It's unlikely that a user for our application would have more than a couple of different addresses. For relationships like this, we would define this as a *one-to-few relationship*.

```
1 {  
2   "_id": "ObjectId('AAA')",  
3   "name": "Joe Karlsson",  
4   "company": "MongoDB",  
5   "twitter": "@JoeKarlsson1",  
6   "twitch": "joe_karlsson",  
7   "tiktok": "joekarlsson",  
8   "website": "joekarlsson.com",  
9   "addresses": [  
10     { "street": "123 Sesame St", "city": "Anytown", "cc": "USA" },  
11     { "street": "123 Avenue Q", "city": "New York", "cc": "USA" }  
12   ]  
13 }
```

Table of Contents

- Schema Design
- Approaches – Relational vs. MongoDB
- Embedding vs. Referencing
- Type of Relationships


Additional Resources:



Relationships

Many-to-Many (N-N)

A Many-to-Many relationship between two entities where they both might have many relationships between each other.

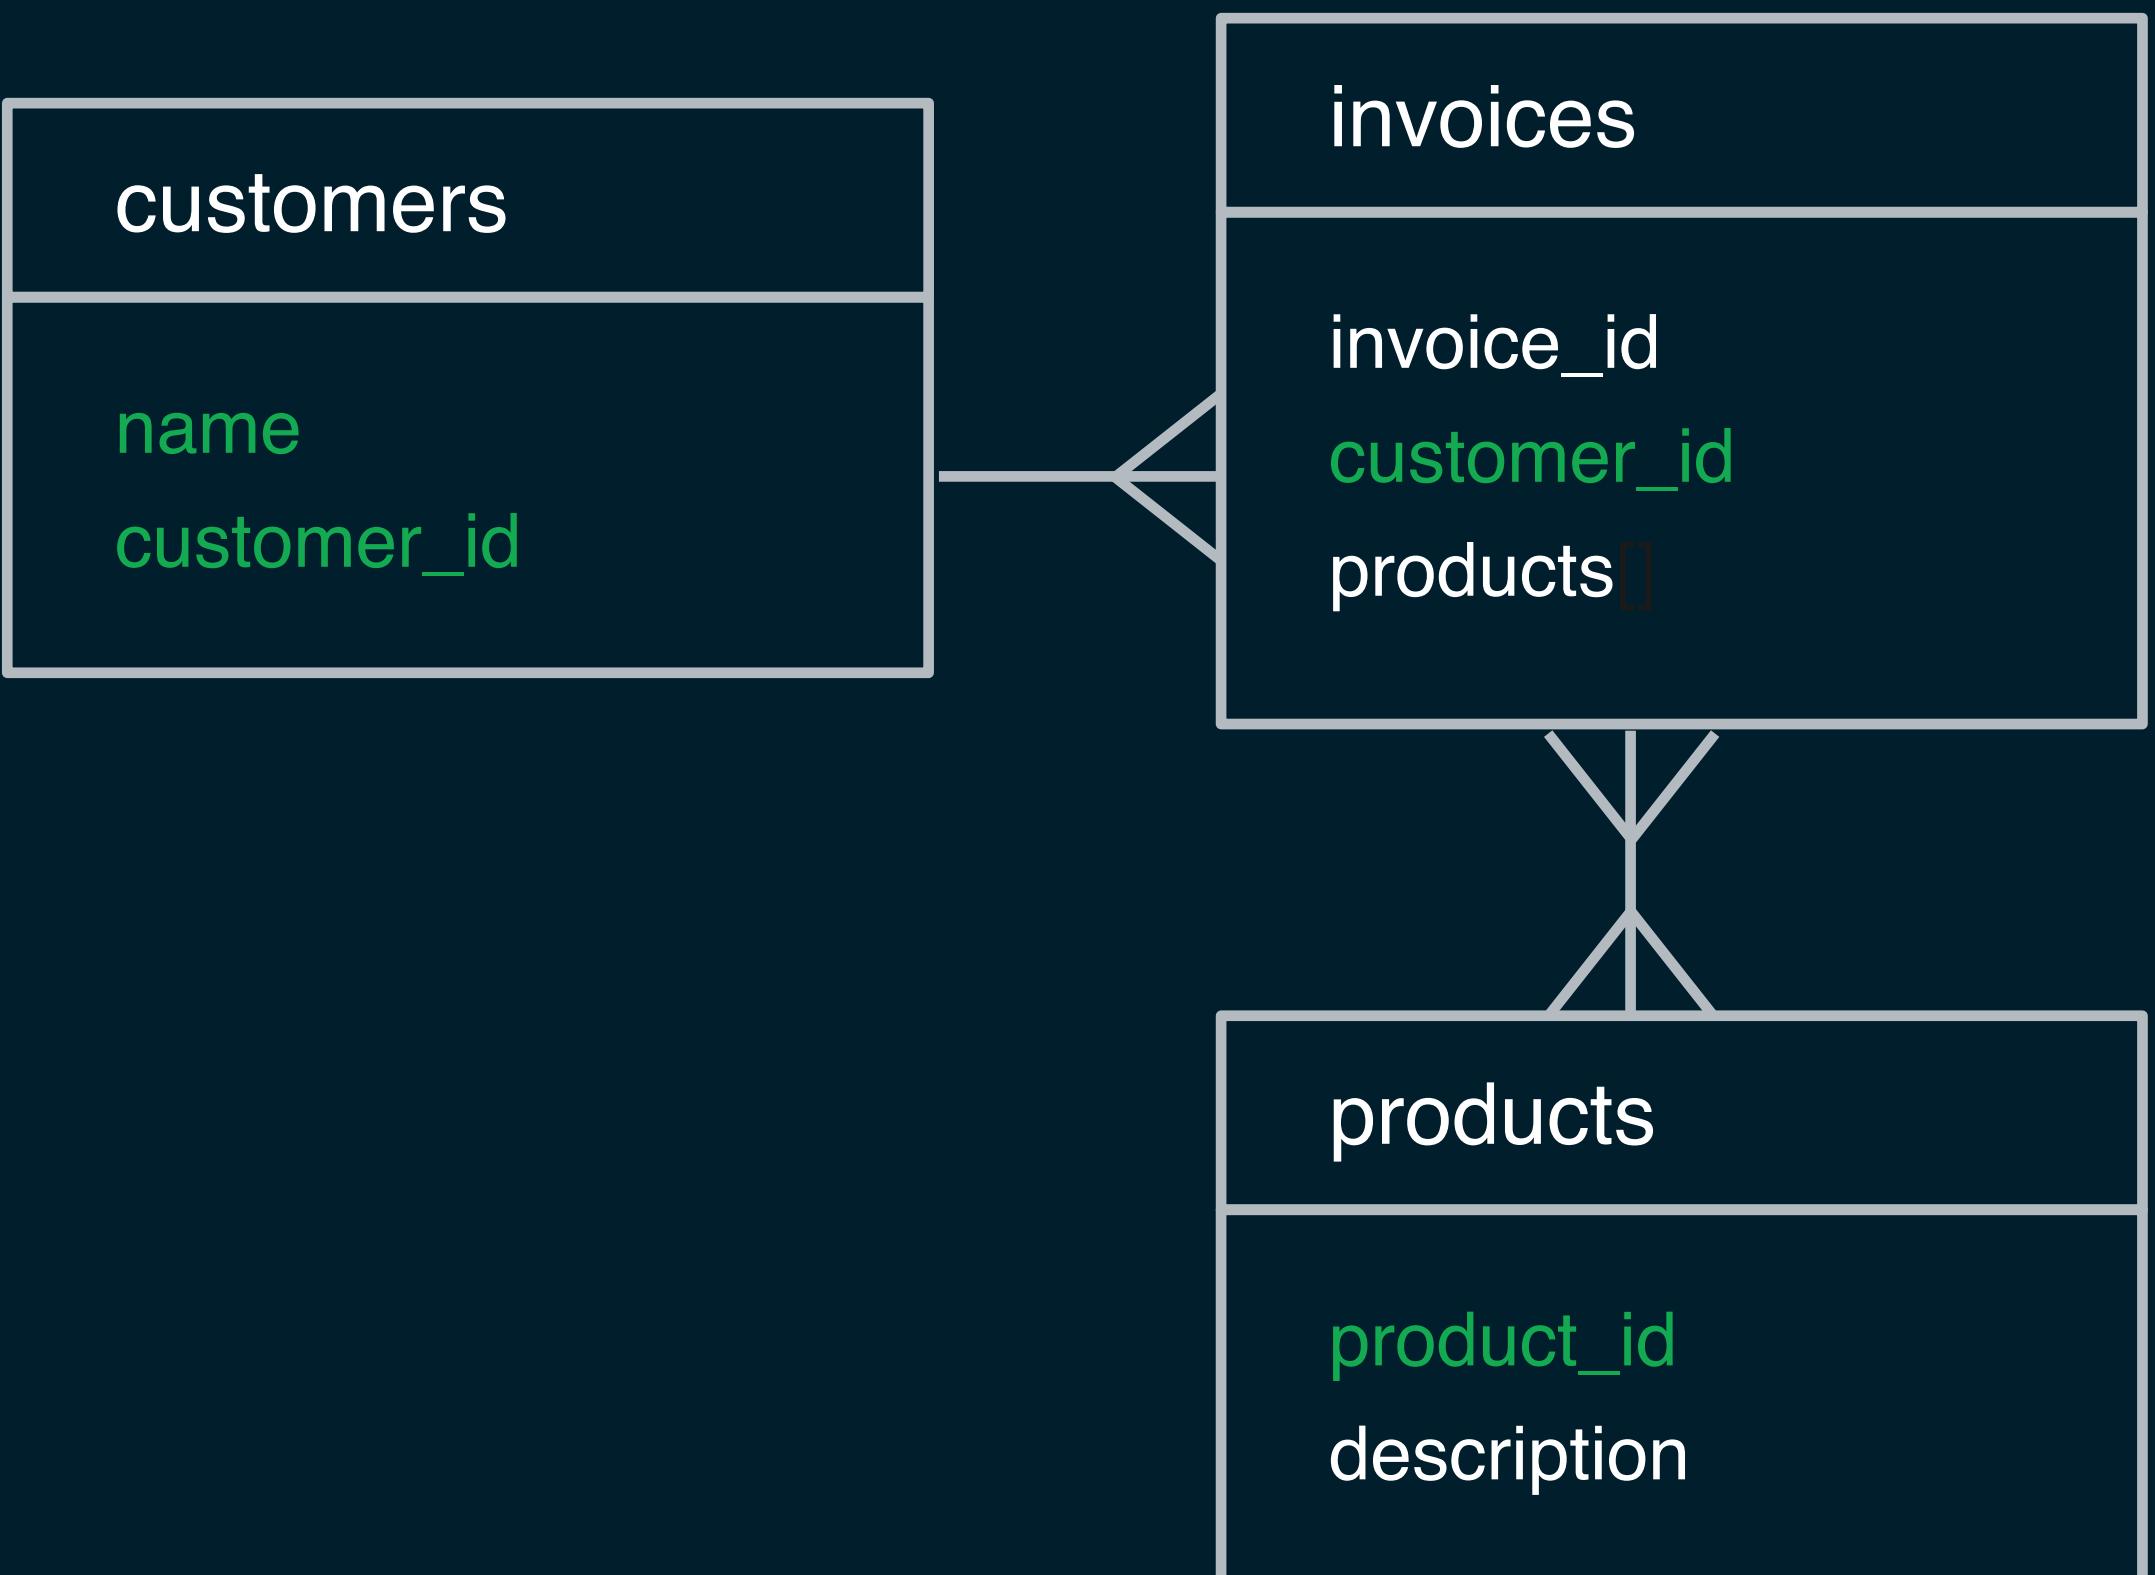



Many to Many (N-N)

Scenario:

Consider a scenario where a book was written by multiple authors and similarly, one of the authors has written multiple books. How would we go about mapping these relationships?

MongoDB Schema Design Best Practices

mongodb.com/developer/products/mongodb/mongodb-schema-design-best-practices/

MongoDB Developer Topics Documentation Articles Tutorials Events Code Examples Podcasts MongoDB TV

Users:

```
1 {
2   "_id": ObjectId("AAF1"),
3   "name": "Kate Monster",
4   "tasks": [ObjectId("ADF9"), ObjectId("AE02"), ObjectId("AE73")]
5 }
```

Tasks:

```
1 {
2   "_id": ObjectId("ADF9"),
3   "description": "Write blog post about MongoDB schema design",
4   "due_date": ISODate("2014-04-01"),
5   "owners": [ObjectId("AAF1"), ObjectId("BB3G")]
6 }
```

Table of Contents

- Schema Design
- Approaches – Relational vs. MongoDB
- Embedding vs. Referencing
- Type of Relationships

Additional Resources:



- One-to-One - Prefer key value pairs within the document
- One-to-Few - Prefer embedding
- One-to-Many - Prefer embedding
- One-to-Squillions - Prefer Referencing
- Many-to-Many - Prefer Referencing

Embed or Link



Embed

- For integrity with read operations
- For integrity with write operations
- On one-to-one and one-to-many
- For data that is deleted together by default

Link

- When the "many" side is a huge number
- For integrity on write operations on many-to-many
- When a piece is frequently used, but not the other and memory is an issue



- Rule 1: Favor embedding unless there is a compelling reason not to.
- Rule 2: Needing to access an object on its own is a compelling reason not to embed it.
- Rule 3: Avoid joins and lookups if possible, but don't be afraid if they can provide a better schema design.
- Rule 4: Arrays should not grow without bound. If there are more than a couple of hundred documents on the many side, don't embed them; if there are more than a few thousand documents on the many side, don't use an array of ObjectId references. High-cardinality arrays are a compelling reason not to embed.
- Rule 5: As always, with MongoDB, how you model your data depends entirely on your particular application's data access patterns. You want to structure your data to match the ways that your application queries and updates it.

General Rules for MongoDB Schema Design

Indexes and search






What is an Index in MongoDB?

Indexes hold a small portion of the collection's data in a form that's easy to traverse. They are used to:

- Speed up queries and updates
- Avoid disk I/O as queries eliminating the need for slow collection scans
- Reduce overall computation

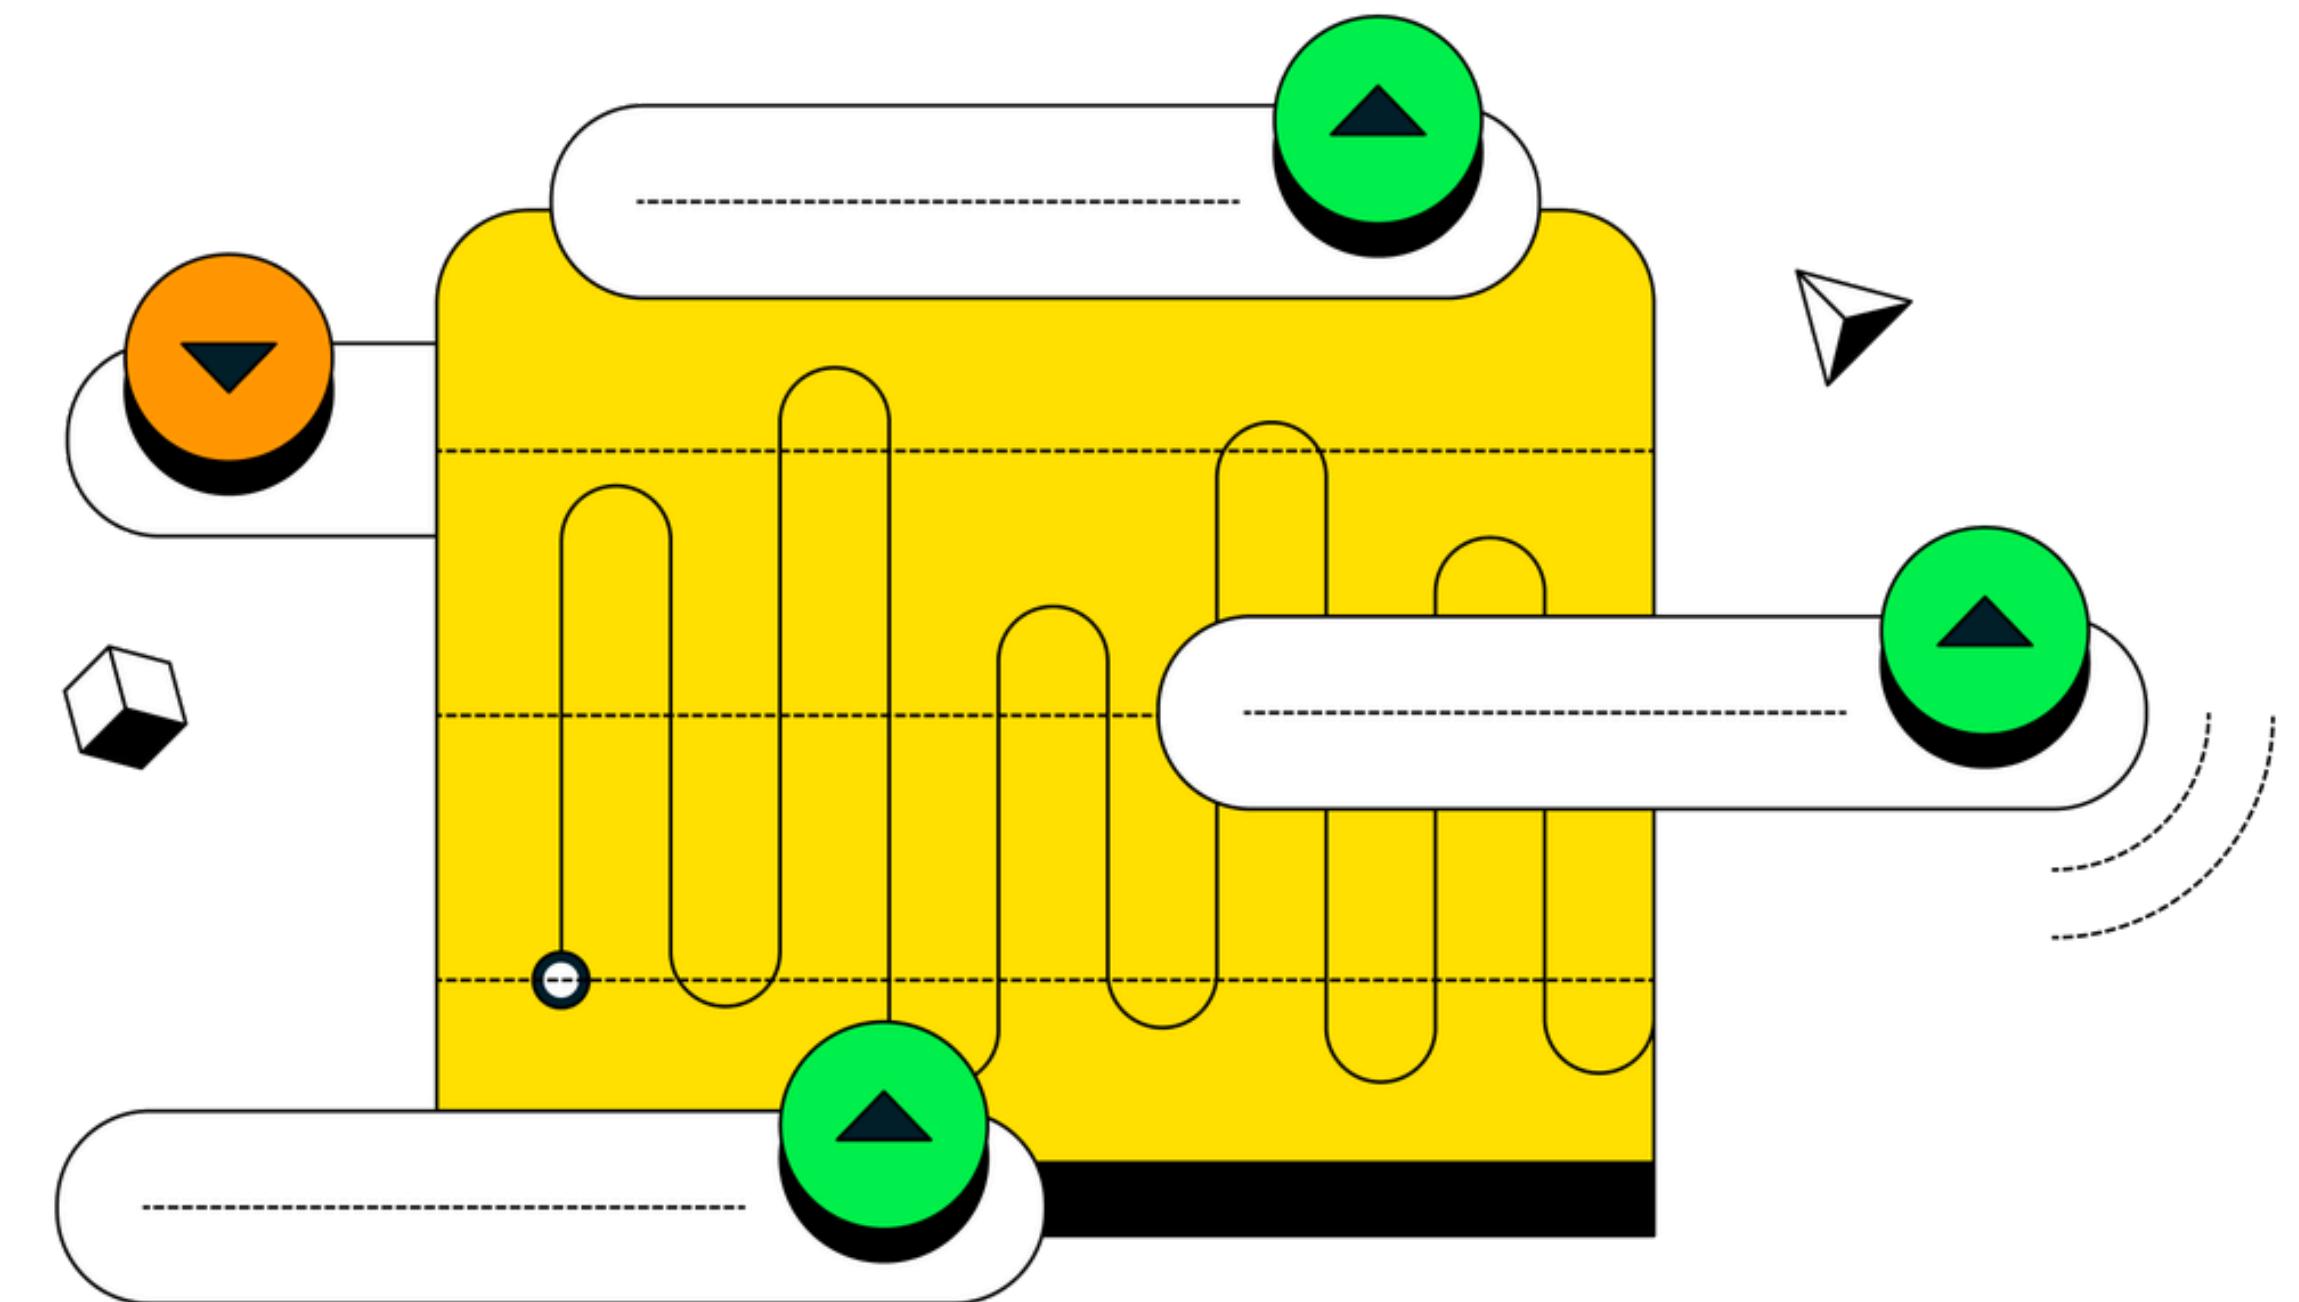

Search Index

Index for Amounts						
amount: 2600	amount: 1800	amount: 1300	amount: 1200	amount: 1000	amount: 700	amount: 600

Raw Data						
{ date: "Jan 1", amount: 1000 }	{ date: "Feb 29", amount: 600 }	{ date: "Dec 24", amount: 700 }	{ date: "Mar 7", amount: 2600 }	{ date: "Jan 15", amount: 1200 }	{ date: "Apr 2", amount: 1300 }	{ date: "Mar 12", amount: 1800 }

Index for Dates						
date: "Dec 24"	date: "Jan 1"	date: "Jan 15"	date: "Feb 29"	date: "Mar 7"	date: "Mar 12"	date: "Apr 2"

Query for quarterly sales						

Index for Amounts						
amount: 2600	amount: 1800	amount: 1300	amount: 1200	amount: 1000	amount: 700	amount: 600

Raw Data						
{ date: "Jan 1", amount: 1000 }	{ date: "Feb 29", amount: 600 }	{ date: "Dec 24", amount: 700 }	{ date: "Mar 7", amount: 2600 }	{ date: "Jan 15", amount: 1200 }	{ date: "Apr 2", amount: 1300 }	{ date: "Mar 12", amount: 1800 }

Index for Dates						
date: "Dec 24"	date: "Jan 1"	date: "Jan 15"	date: "Feb 29"	date: "Mar 7"	date: "Mar 12"	date: "Apr 2"

Query for top 3 sales						

<https://www.mongodb.com/basics/search-index>

Index: example

- This code creates an index on the uid field in the posts collection.
- An index is a data structure that improves the performance of queries that filter or sort based on the indexed field. In this case, the index will improve the performance of queries that filter posts based on the user ID.
- The query `db.posts.find({uid: ObjectId("ZfPTVEMQKf9v")})` will be much faster if there is an index on the uid field, as MongoDB can directly identify the documents associated with the specified user ID. This is in contrast to a scenario where there is no index on the uid field, where MongoDB would have to scan the entire collection to locate the matching documents.

```
db.posts.insertMany([
  {
    caption: "A beautiful morning in Aarhus",
    createdAt: new Date("2023-04-06T09:10:54Z"),
    image: "https://images.unsplash.com/photo-1573997953524-ef",
    uid: ObjectId("HlvRHz58C05g")
  },
  {
    caption: "Rainbow reflections of the city of Aarhus",
    createdAt: new Date("2023-04-02T20:25:34Z"),
    image: "https://images.unsplash.com/photo-1558443336-dbb3c",
    uid: ObjectId("fjpRTjZHwr")
  }
])
// create index
db.posts.createIndex({ uid: 1 });
// posts with specific user
db.posts.find({uid: ObjectId("ZfPTVEMQKf9v")})
```




When to Use Indexes

Developers should use an index when querying data in a collection, especially for frequently run queries.

When determining if an index should be used, consider:

- Four indexes is a good rule of thumb for the ideal number for a given collection.
- Sixty-four indexes are the maximum per collection, however, above 20 and performances renders the system almost unusable for workloads.

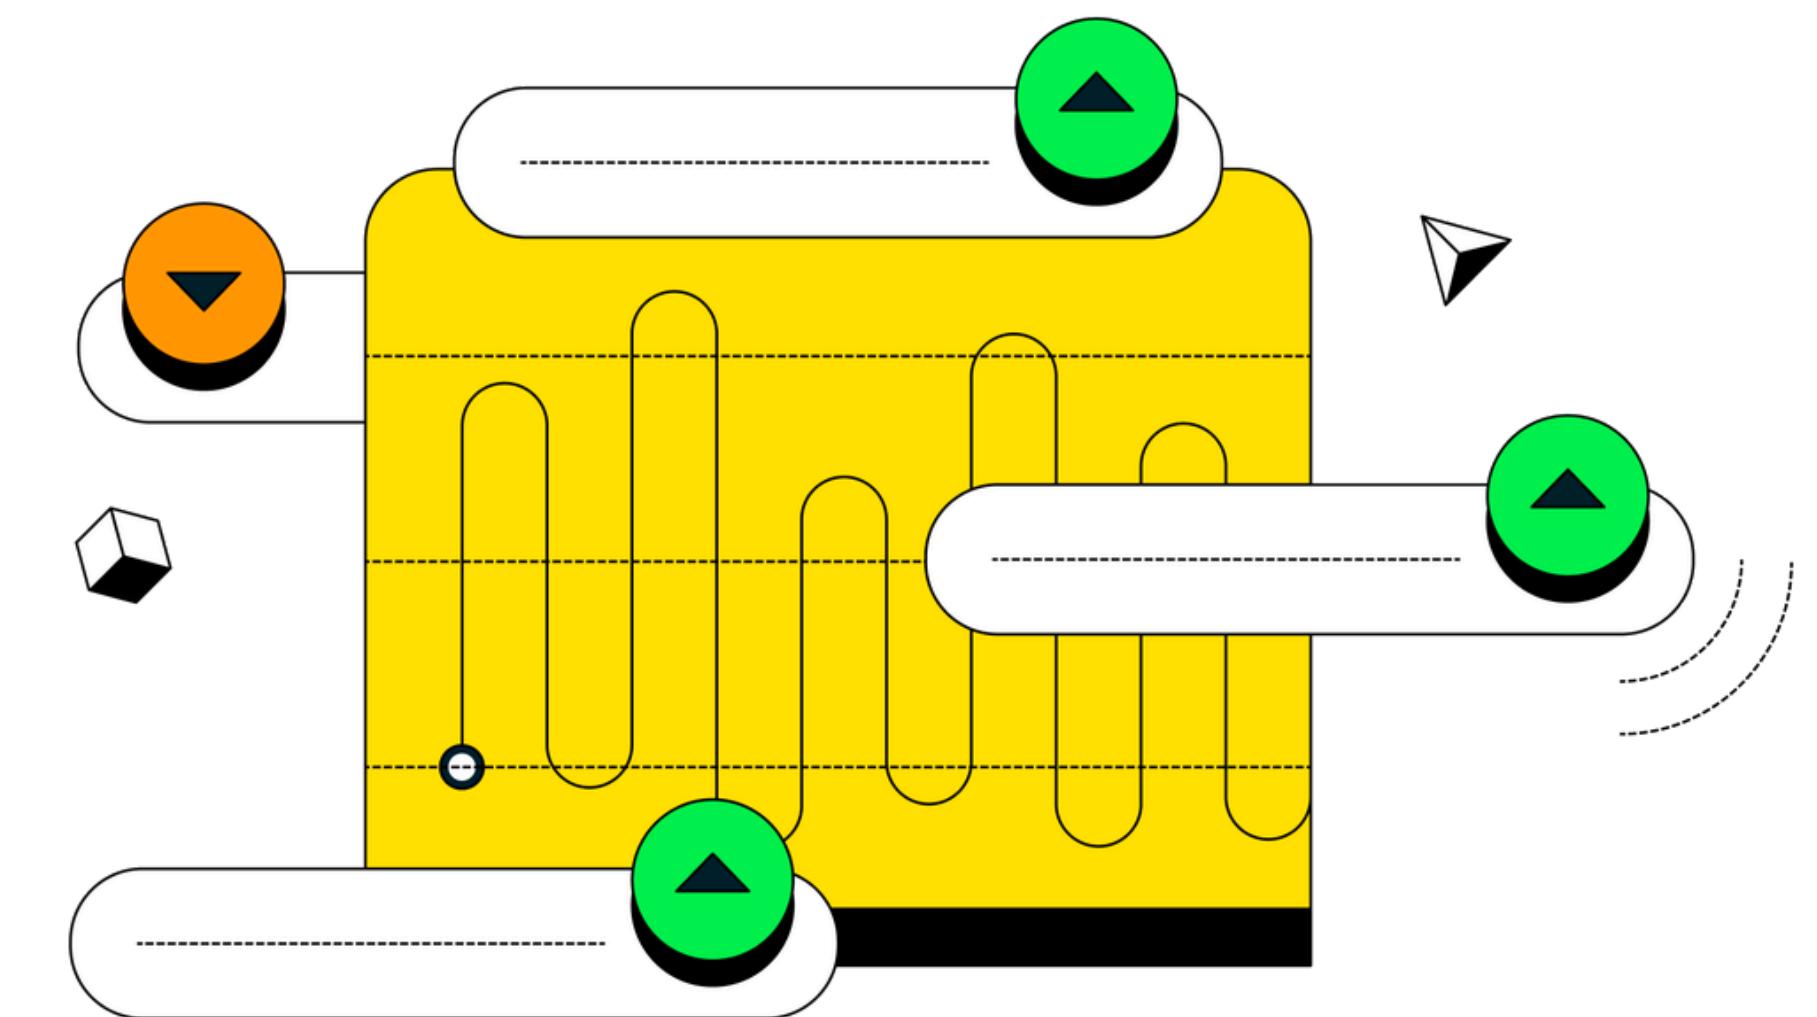



Considerations When Using Indexes

Indexes require RAM.

Avoid unnecessary indexes at all cost, otherwise the write performance will suffer. Each index adds 10% overhead.

When does an index entry get modified?

- Data is inserted (applies to all indexes).
- Data is deleted (applies to all indexes).
- Data is updated in such a way that its indexed field changes.



Types of Indexes Available

Most common indexes:

- Single Field
- Compound Index

Other types of specialized indexes including:

- Multikey Index
- Geospatial Index
- Text Index
- Hashed Index
- Time-To-Live (TTL) Index
- Hidden Index
- Partial Index
- Wildcard Index