



Most popular JavaScript frameworks

2012 - 2019

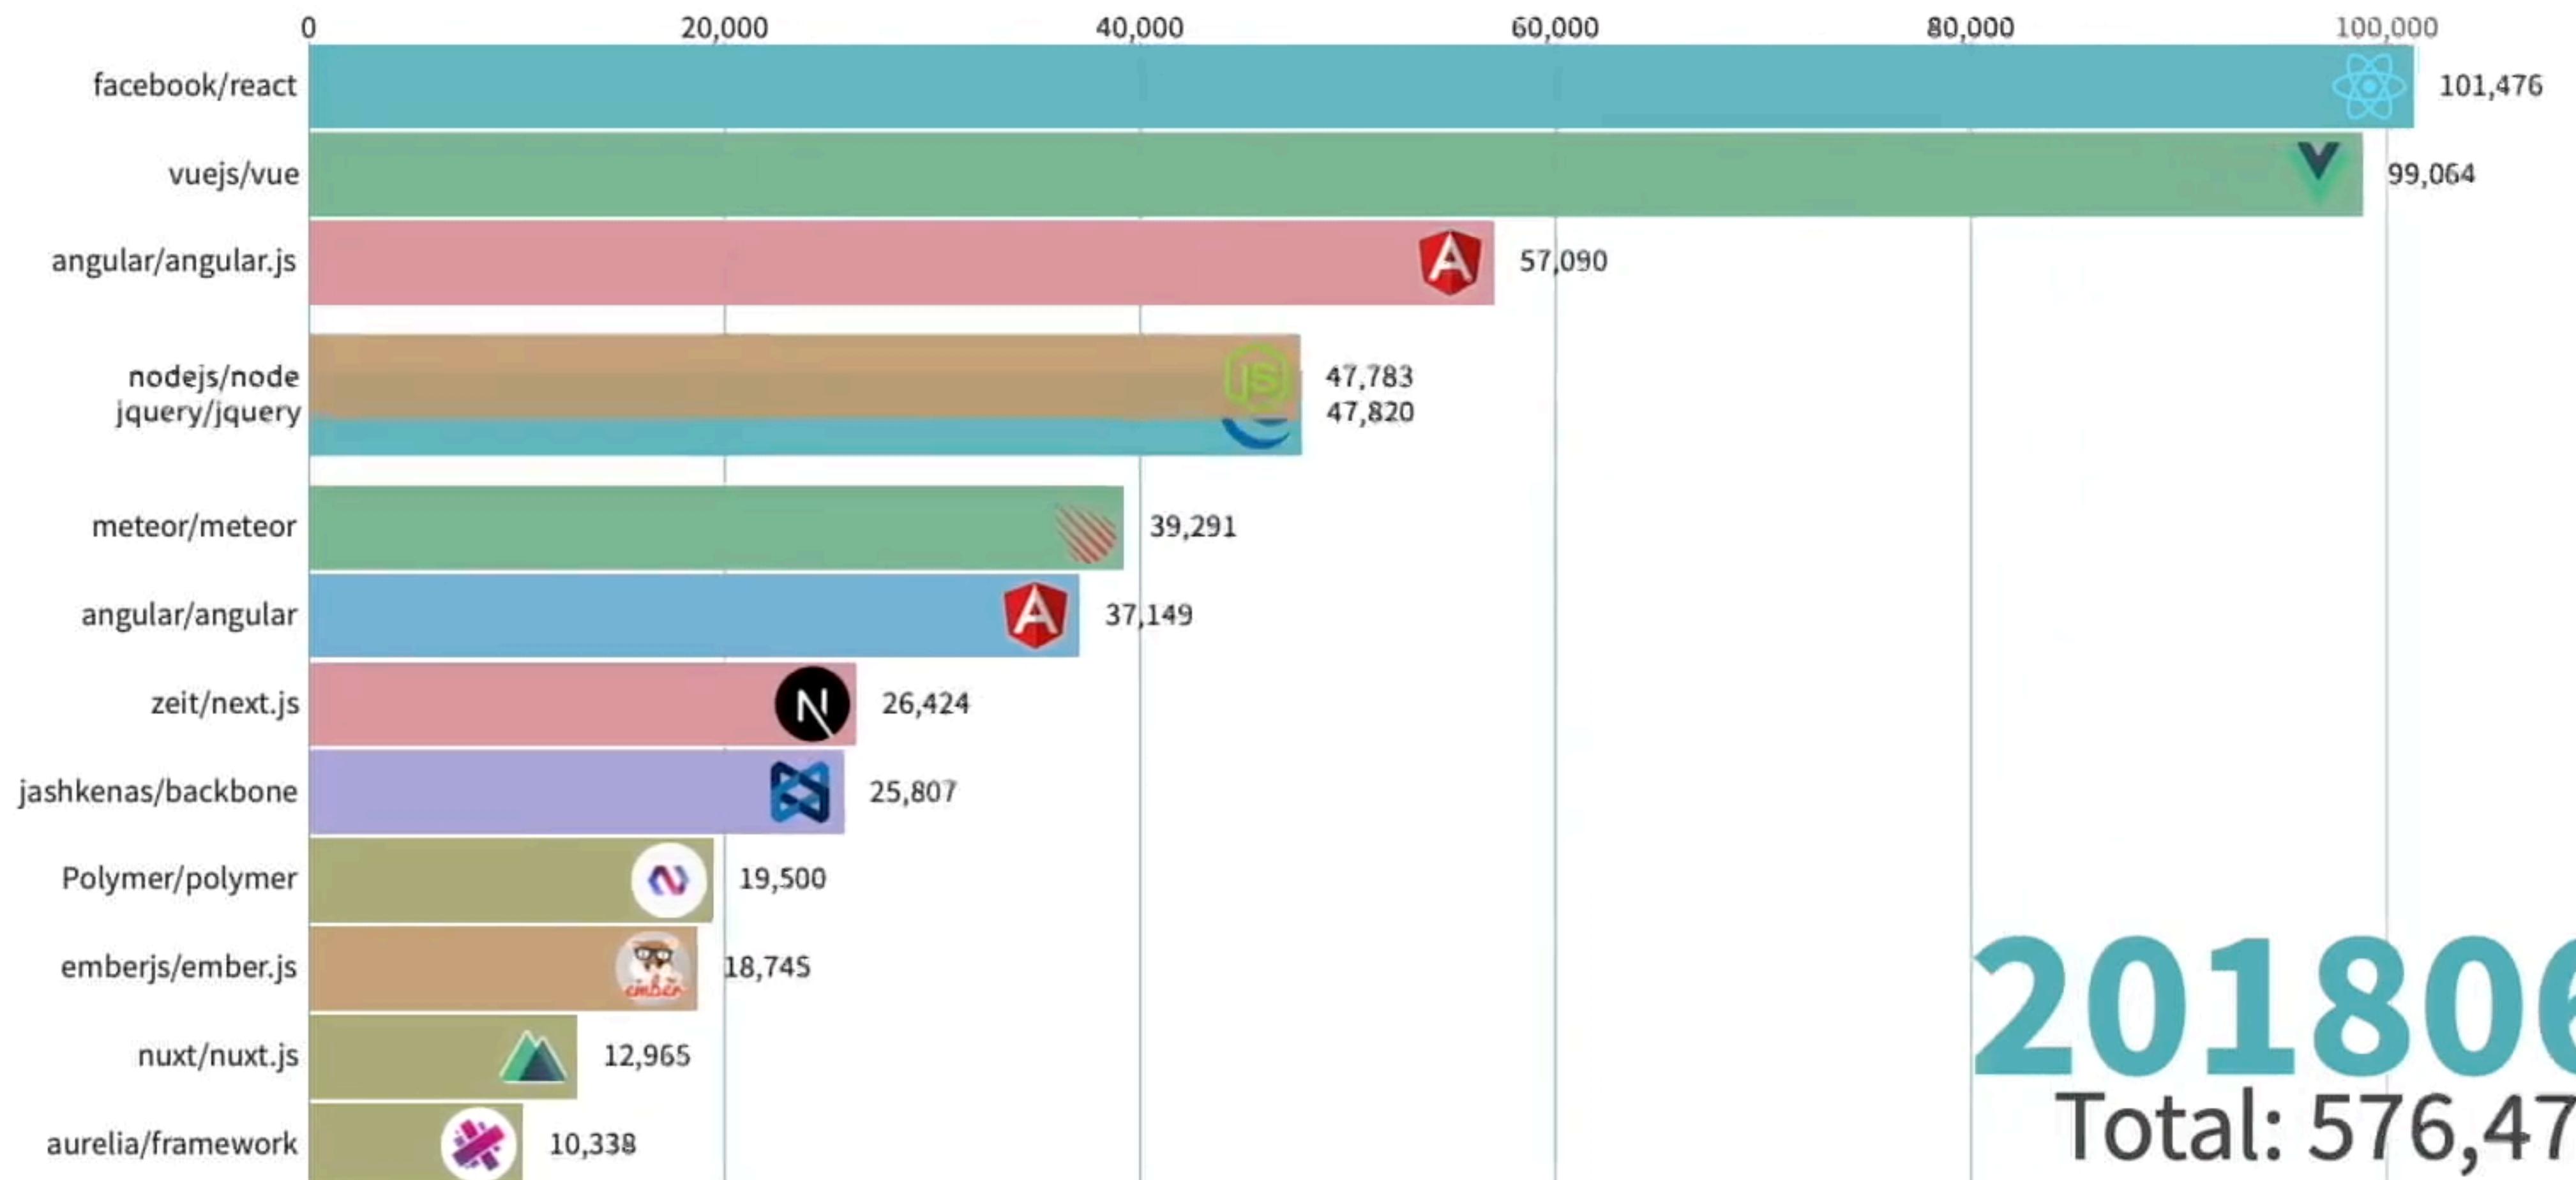

Source: GitHub Archive

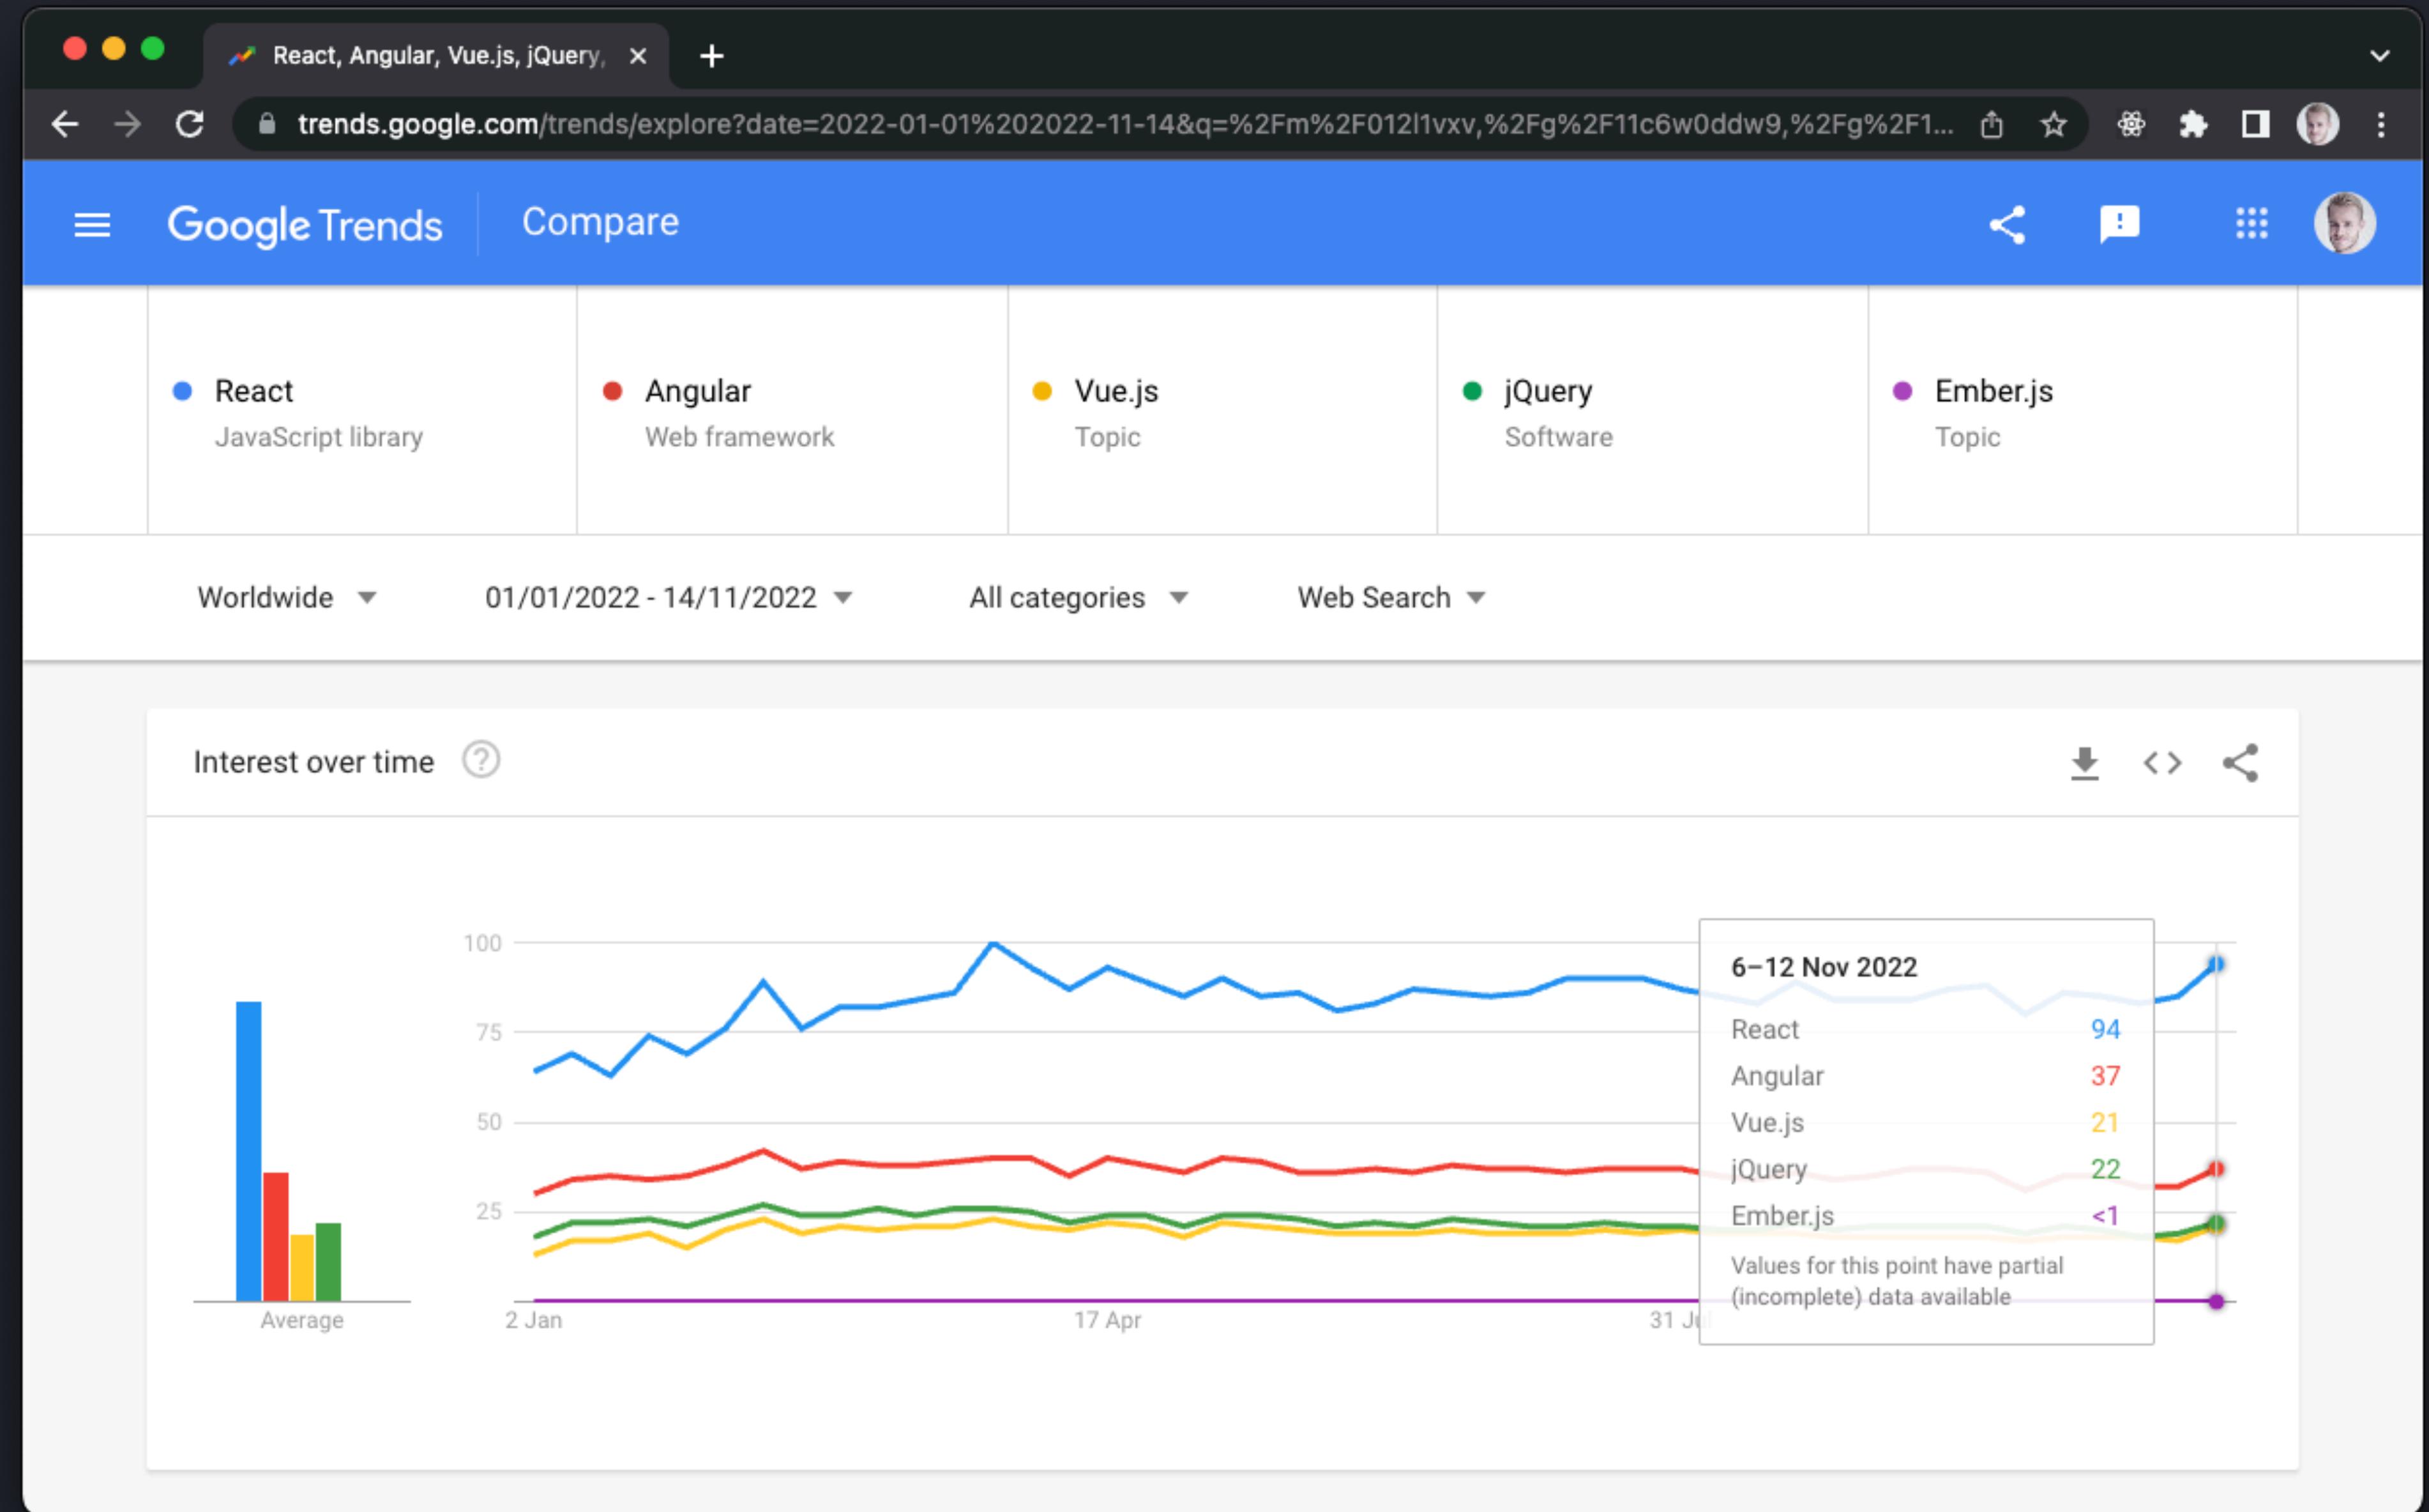

Google Trends

JS



<https://www.youtube.com/watch?v=cuHDQhDhvPE&t=81s>

“

The cool thing about JavaScript is
that you can create stuff that will put
a smile on your face, as a developer.

You can create stuff and it will
visually look like something, and it'll
do stuff, and it makes you feel good,
it makes you fall in love with
programming.

”

Lex Fridman
Computer Scientist

<https://www.youtube.com/watch?v=GLhyjVZp0cw&t=252s>

Introduction to React


Frontend Programming

Edit `src/App.js` and save to reload
Learn React



Purpose

- Introduce you to React
- Gain an understanding of React Core Concepts.
- Hands-on with React and React CRUD SPA.

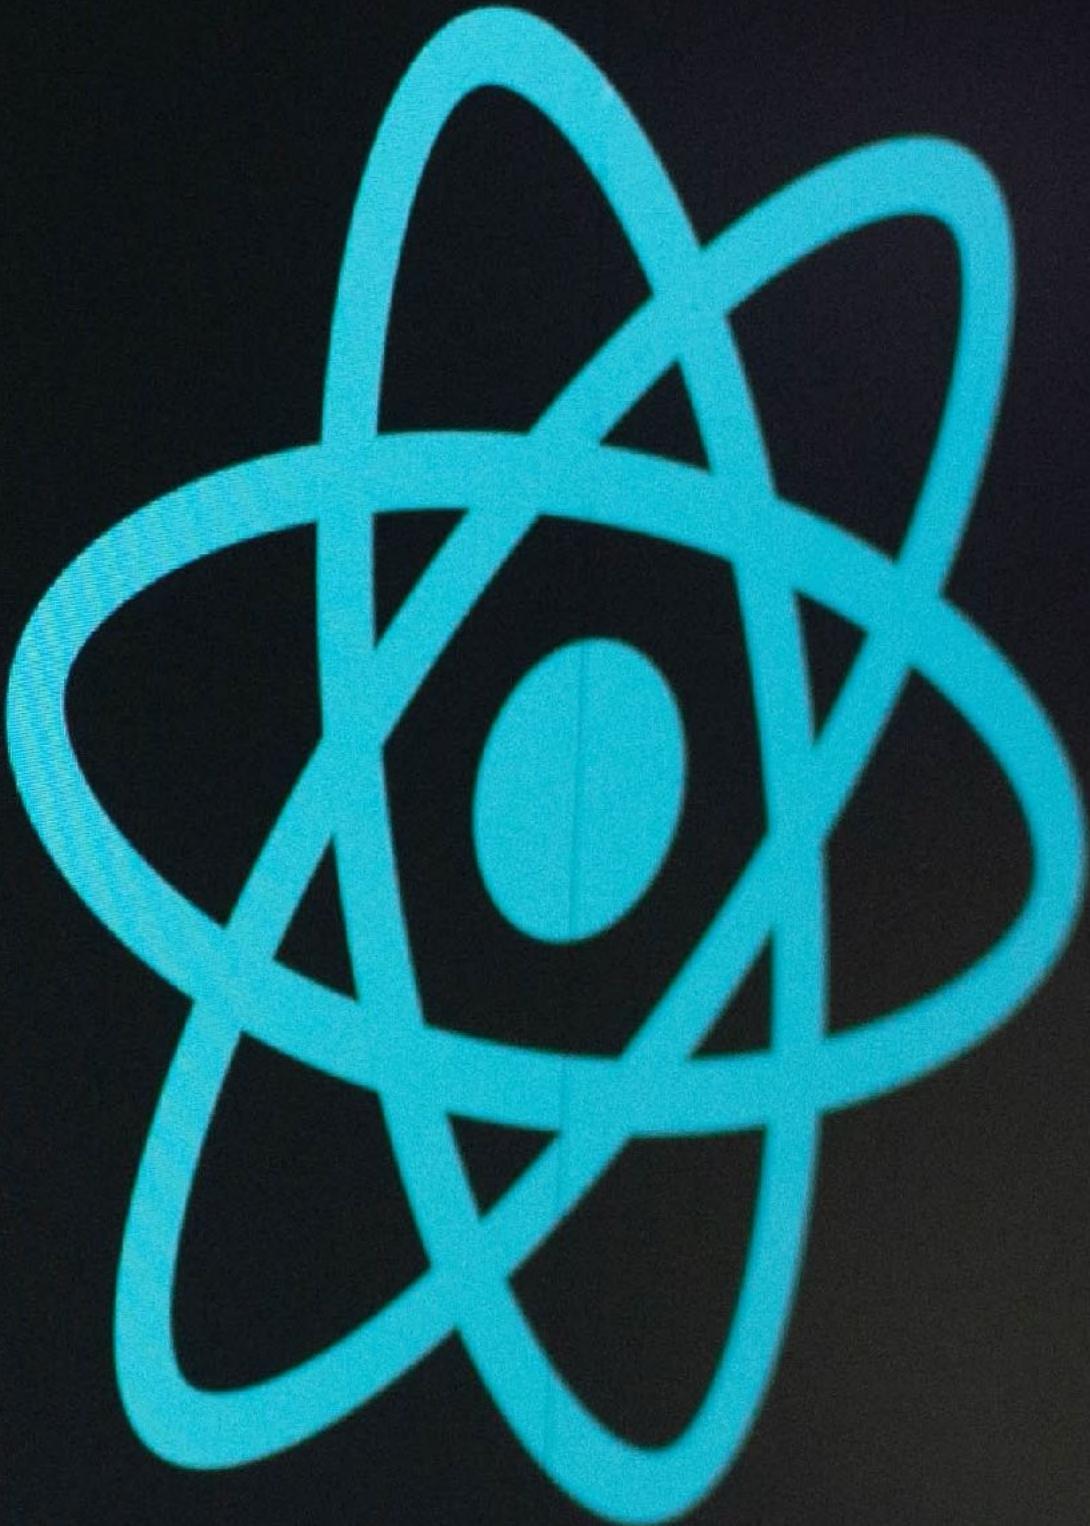

Edit src/App.js and save to reload
Learn React

React CRUD

React Firebase REST Post App https://race-rest.web.app

POSTS CREATE

 Morten Algy Bonderup
Senior Lecturer



Qui est esse

Est rerum tempore vitae sequi sint nihil reprehenderit dolor beatae ea dolores neque fugiat blanditiis voluptate porro vel nihil molestiae ut reiciendis qui aperiam non debitis possimus qui neque nisi nulla

 Dan Okkels Brendstrup
Lecturer



Consequuntur deleniti eos quia temporibus ab aliquid at

Voluptatem cumque tenetur consequatur expedita ipsum nemo quia explicabo aut eum minima consequatur tempore cumque quae est et et in consequuntur voluptatem voluptates aut

 Kim Elkjær Marcher-Jepsen
Senior Lecturer



At nam consequatur ea labore ea harum

Cupiditate quo est a modi nesciunt soluta ipsa voluptas error itaque dicta in autem qui minus magnam et distinctio eum accusamus ratione error aut

 Birgitte Kirk Iversen
Senior Lecturer



Jes Arbov
Lecturer



 Maria Louise Bendixen
Senior Lecturer




<https://race-rest.web.app/>

Good to know...

HTML & CSS Basics, CSS Layouts, Grids & Flexbox, Selectors
Variables, Objects, Arrays, Loops, Functions, DOM-
Manipulation, Template String, ES6+ Features, fetch, API,
JSON, CRUD, Forms & Events


- What is React?
- The Core Concepts of React
 - Components
 - JSX
 - Props
 - React Hooks: useState & useEffect
- create-react-app
- Web App
- Single Page Apps
- React Router
- React CRUD

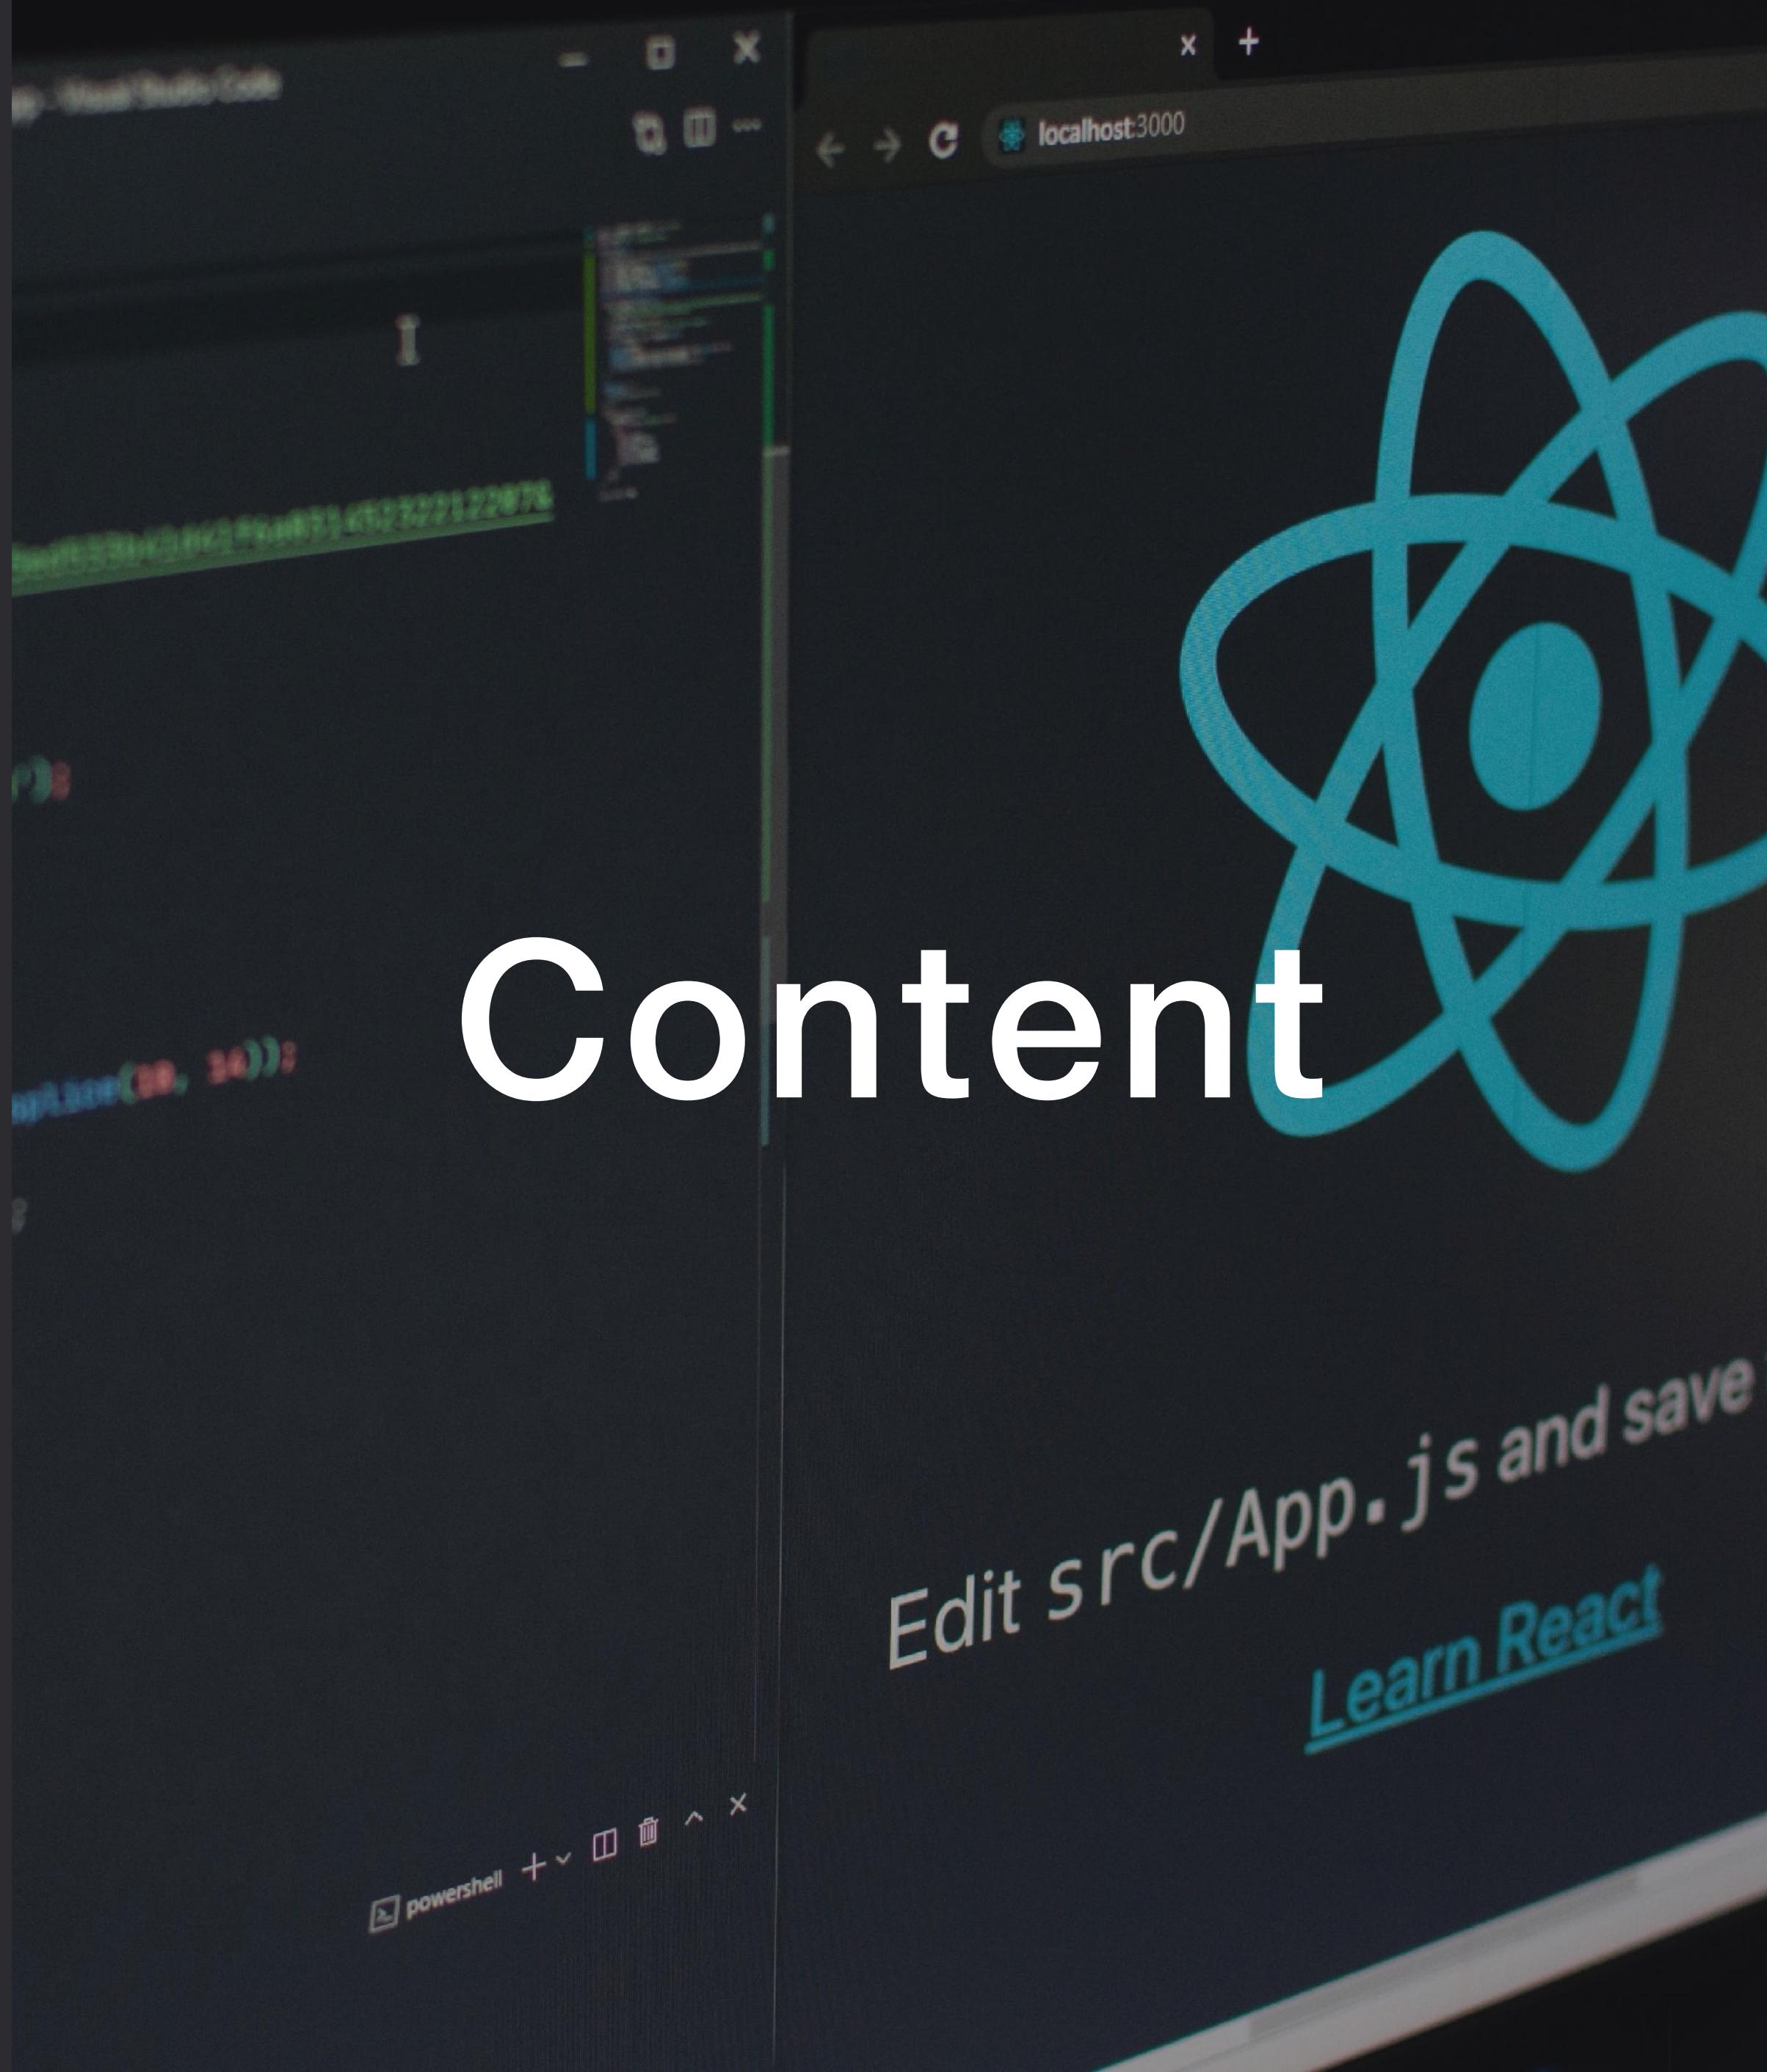


Exercises

- [Create React App](#)
- [Your First React App](#)
- [Component Page Layout](#)
- [Add Props: Your First React App](#)
- [Add Props: Page Layout](#)
- [Tryout useState](#)
- [React Fetch Posts #1](#)
- [React Fetch Posts #2](#)
- [Download & install Node.js & npm](#)
- Generate create-react-app
- [Canvas Users Case w/ React](#)
- [Create React SPA](#)
- [React CRUD App w/ Firebase REST](#)
- [More React Practice](#)

Fetch, HTTP Request & Response

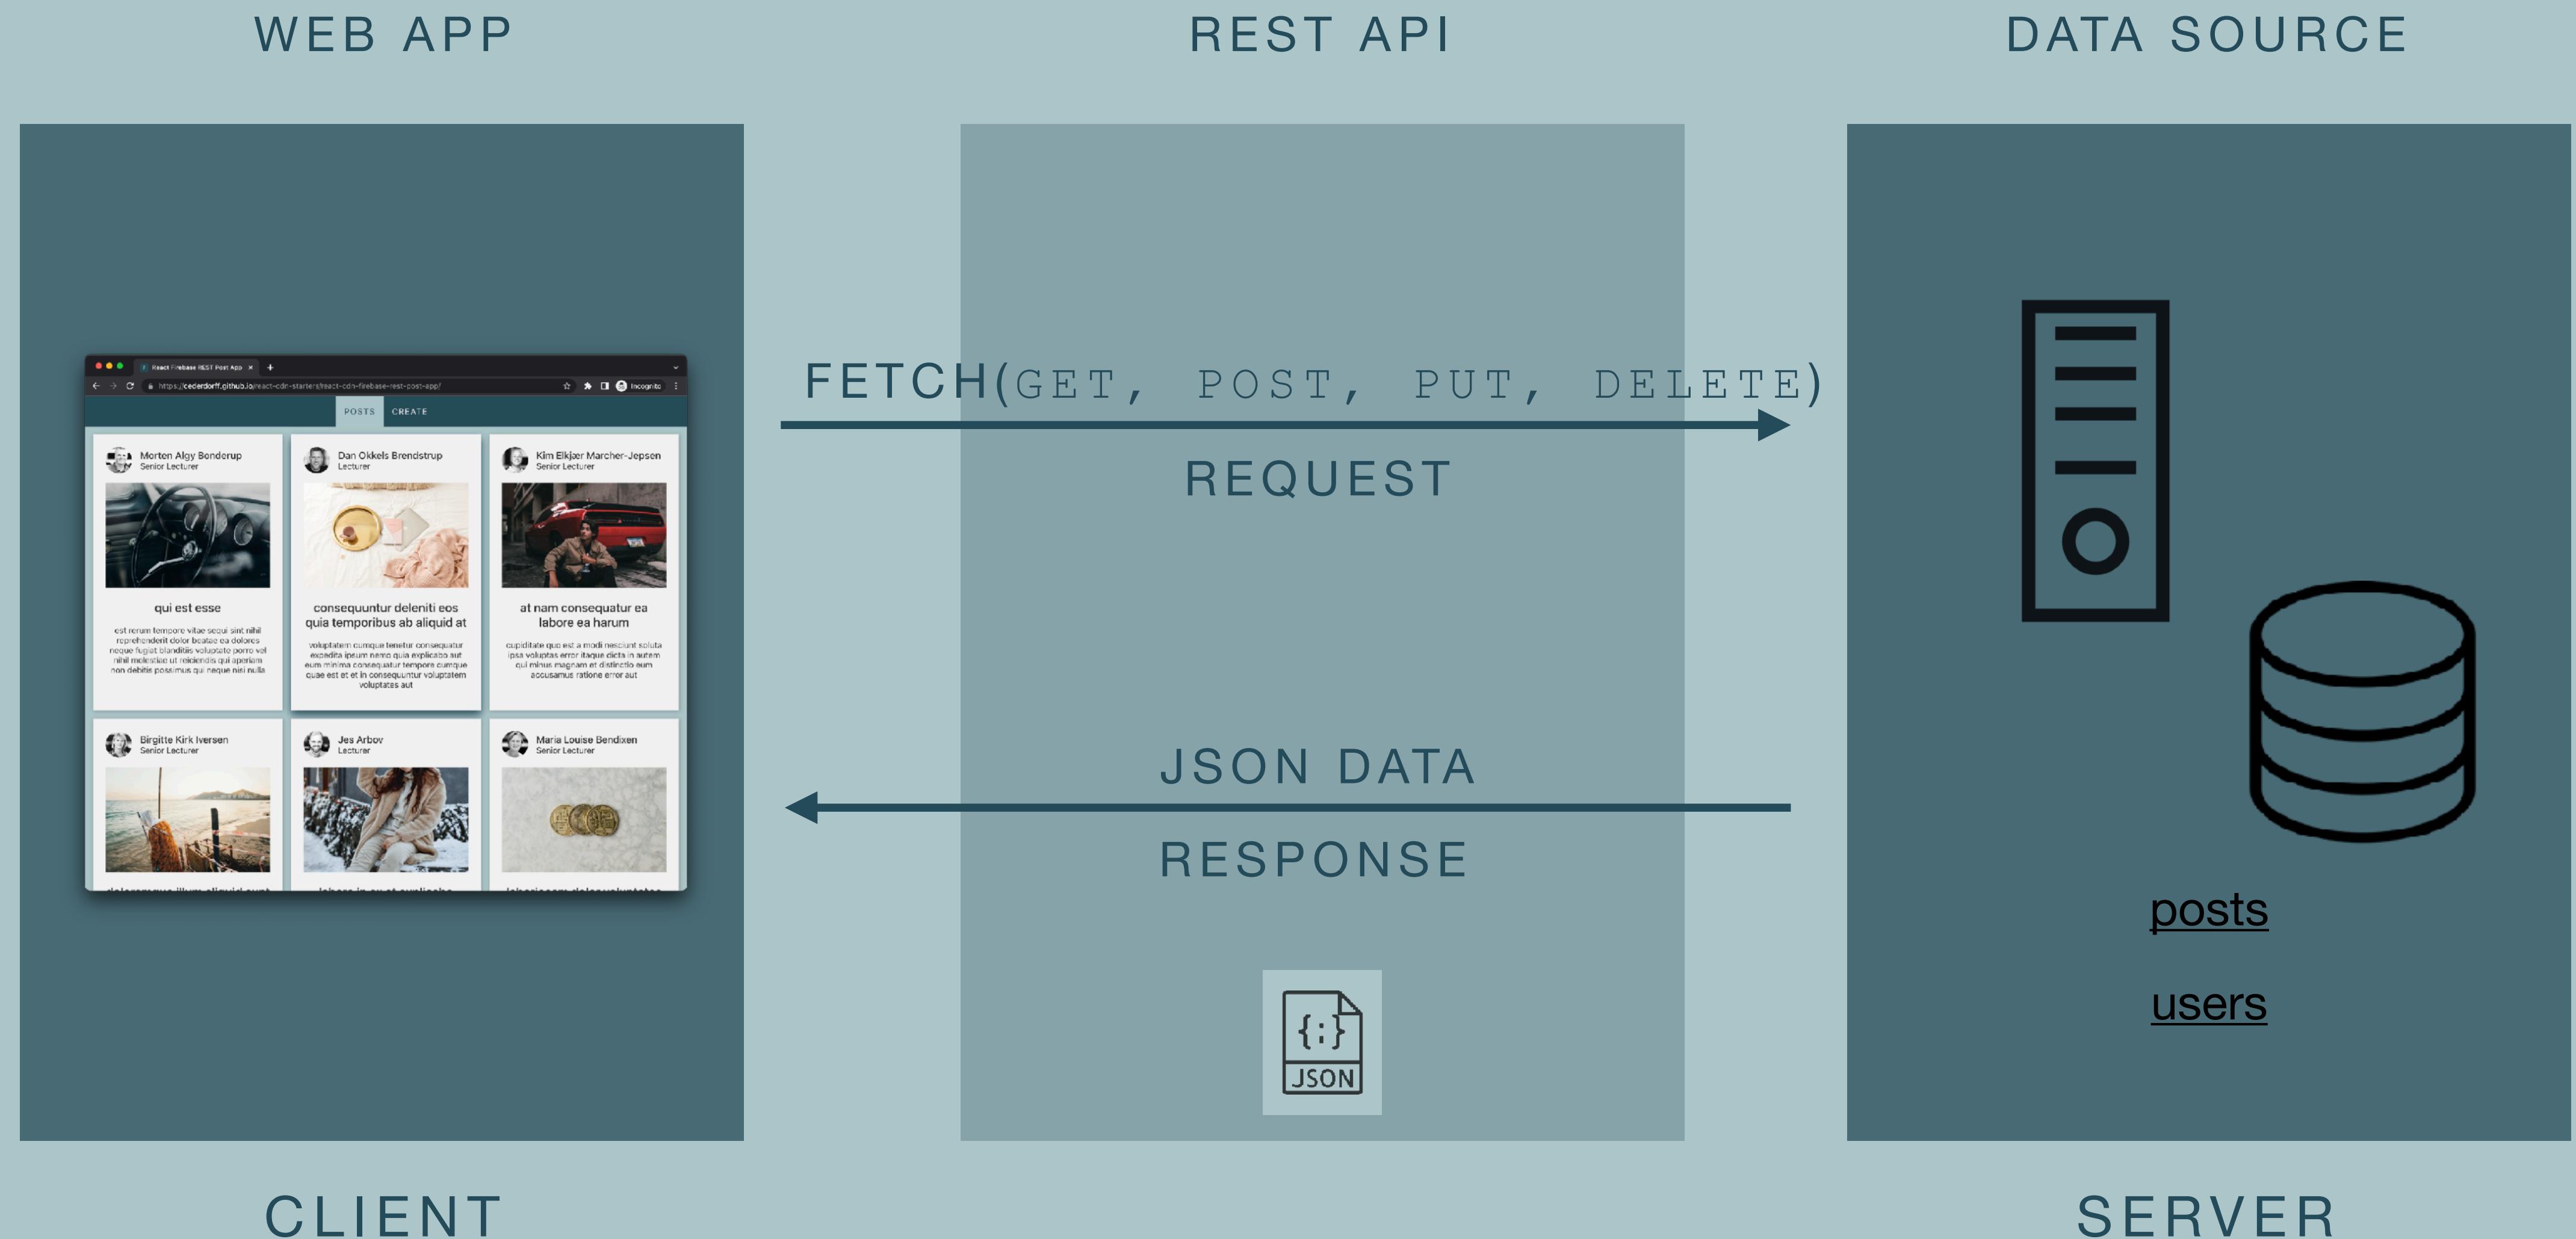


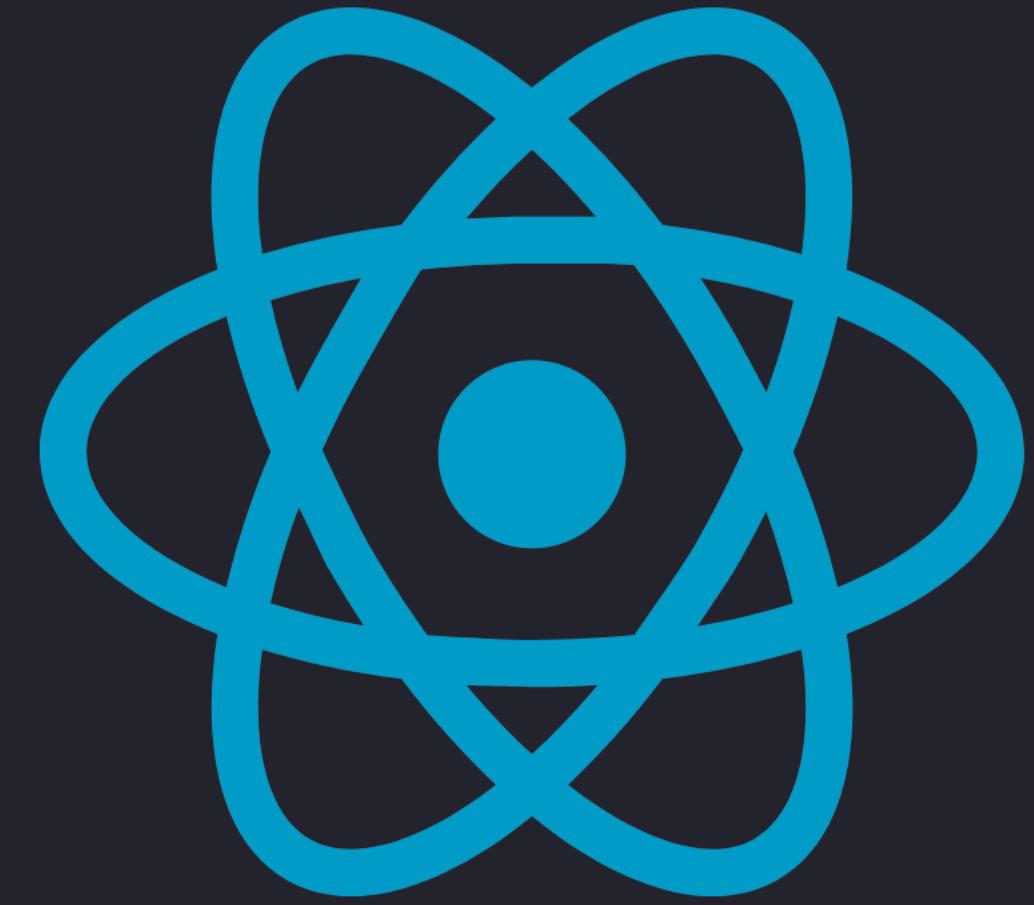


React

A JavaScript library for building User Interfaces


100 *SECONDS OF*

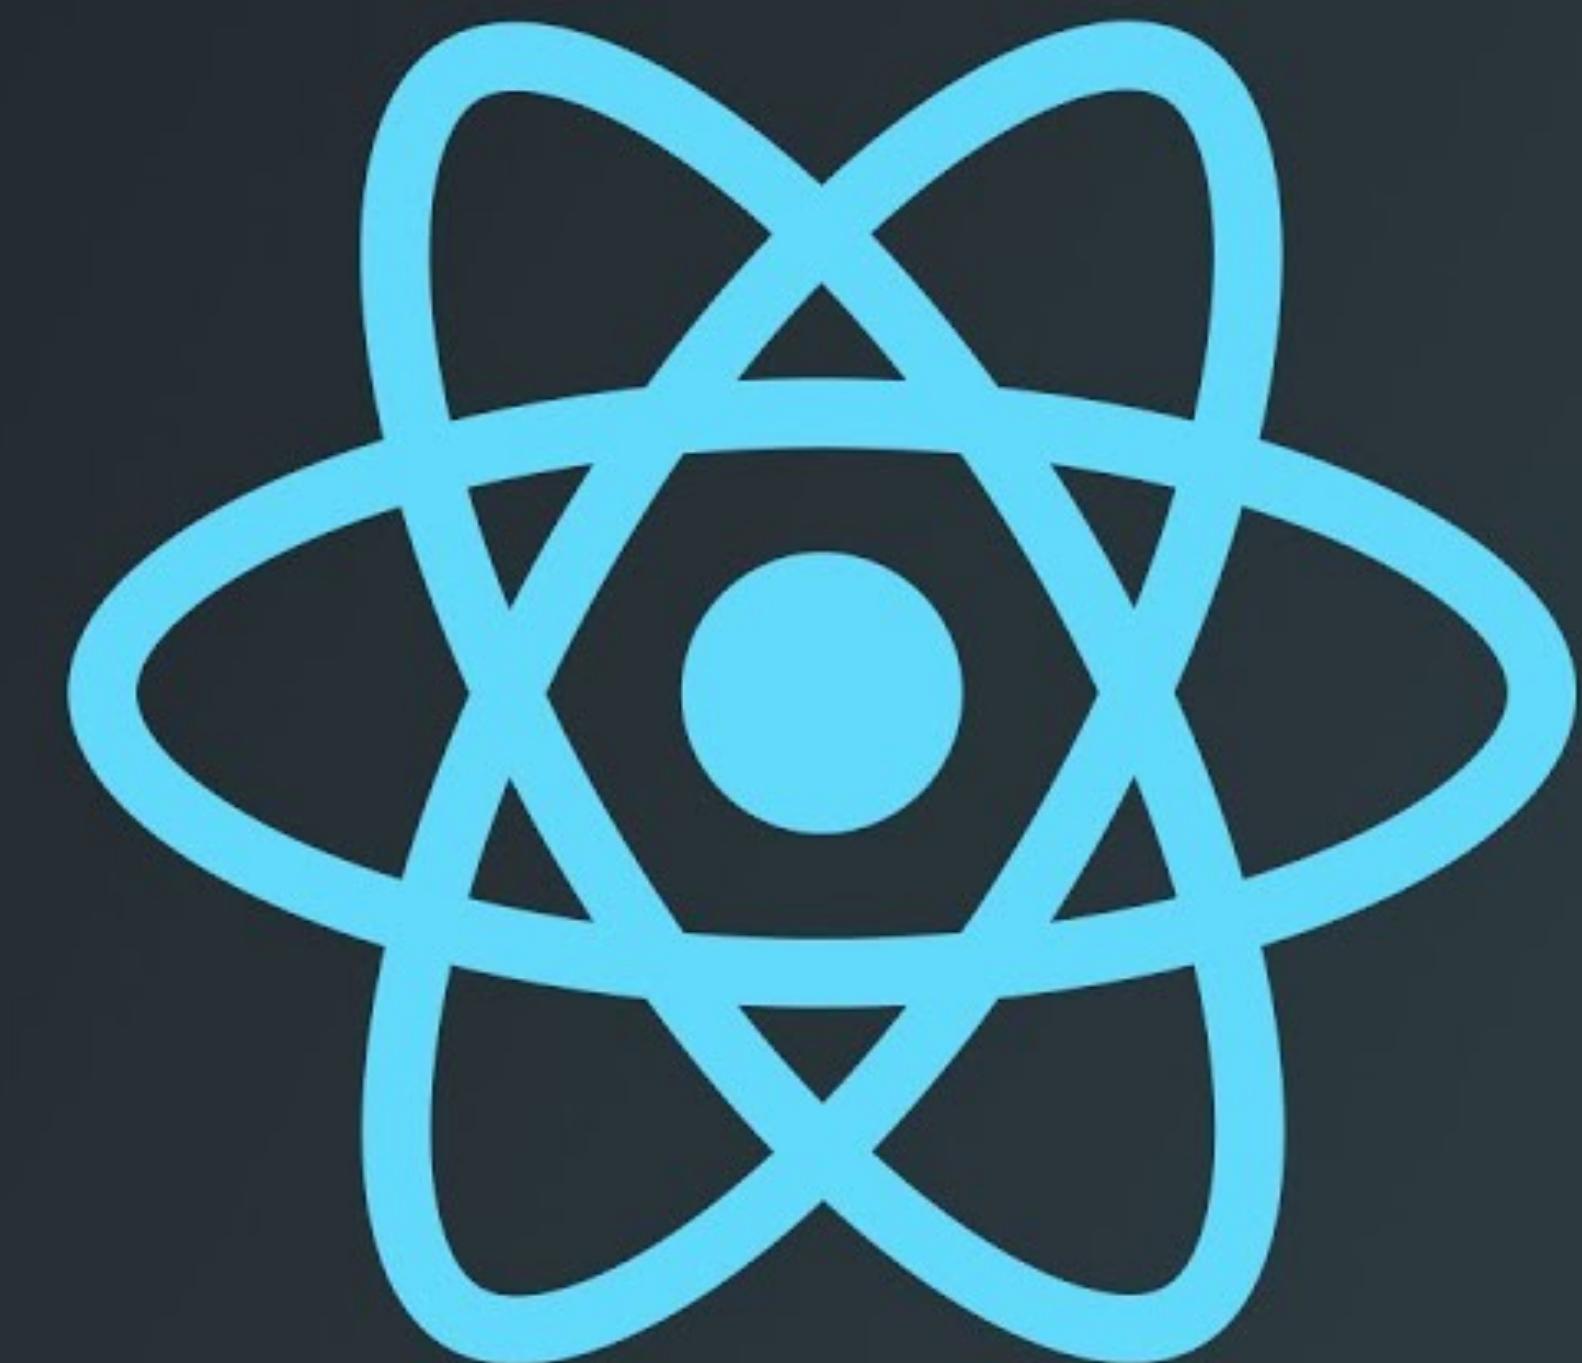

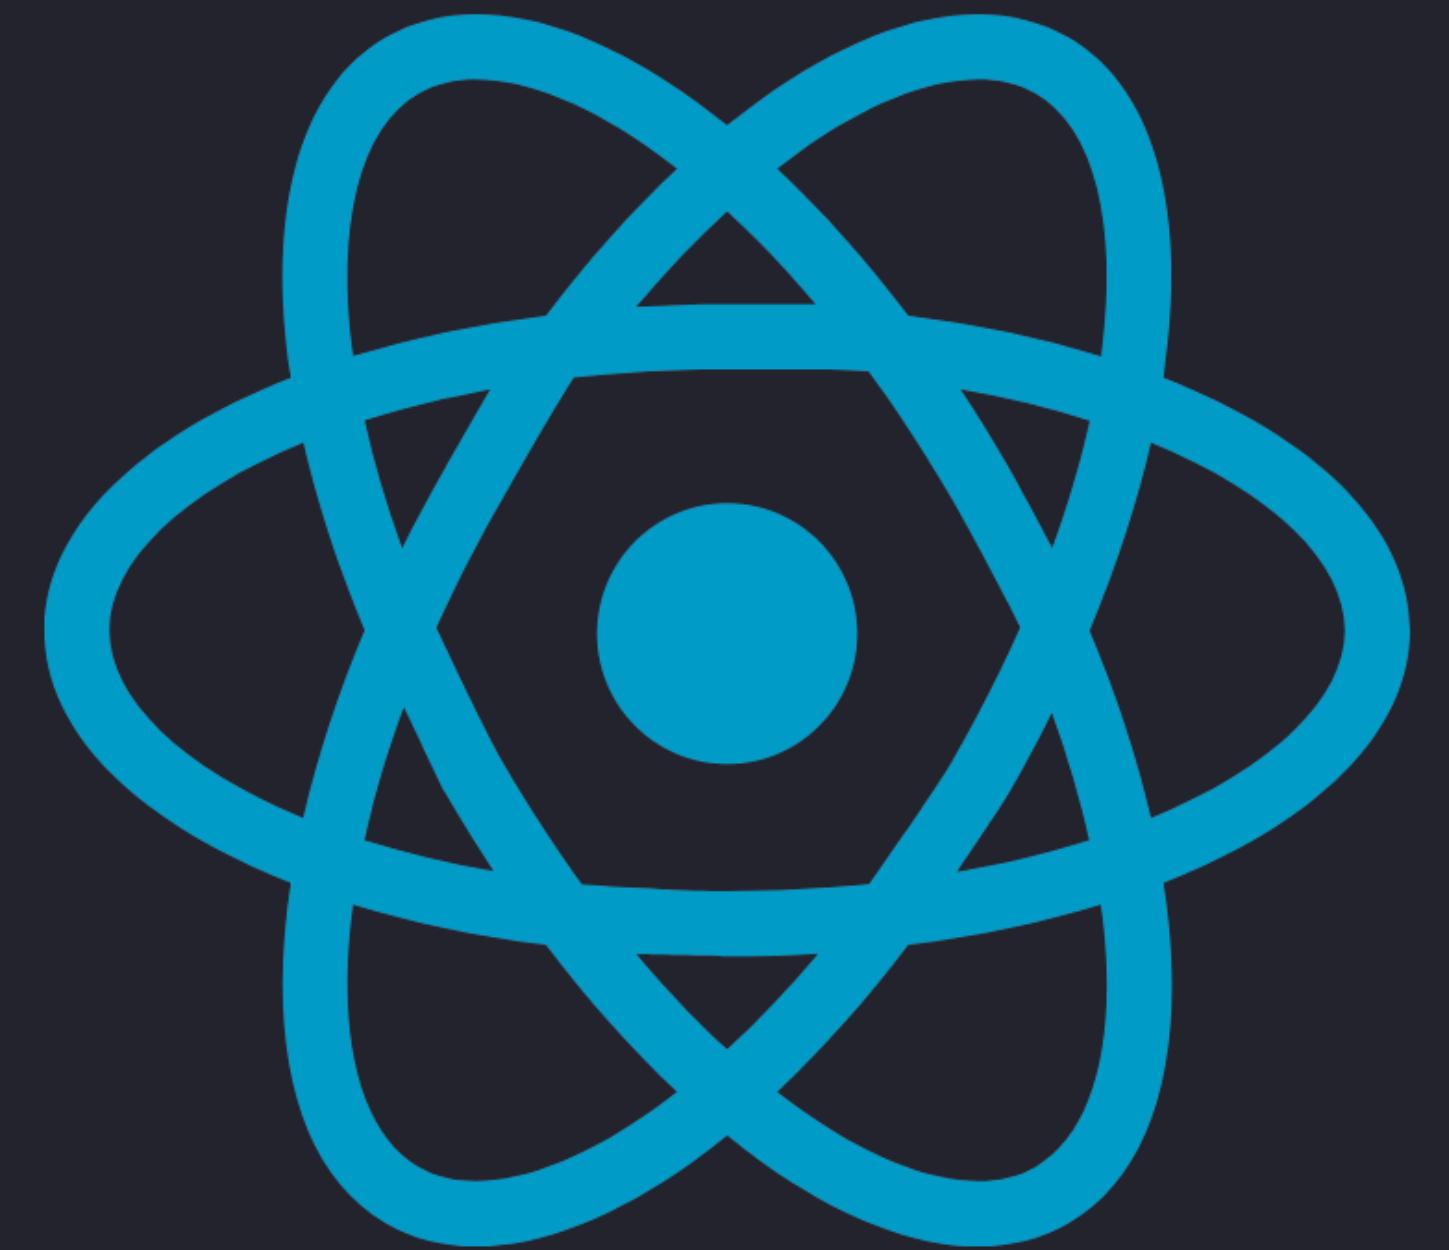

What is React?

- A JavaScript library for building User Interfaces.
- It's a tool for creating reusable UI Components.
- State-based UI, Routing, Single Page Apps, Mobile, Server-side rendered apps, etc.

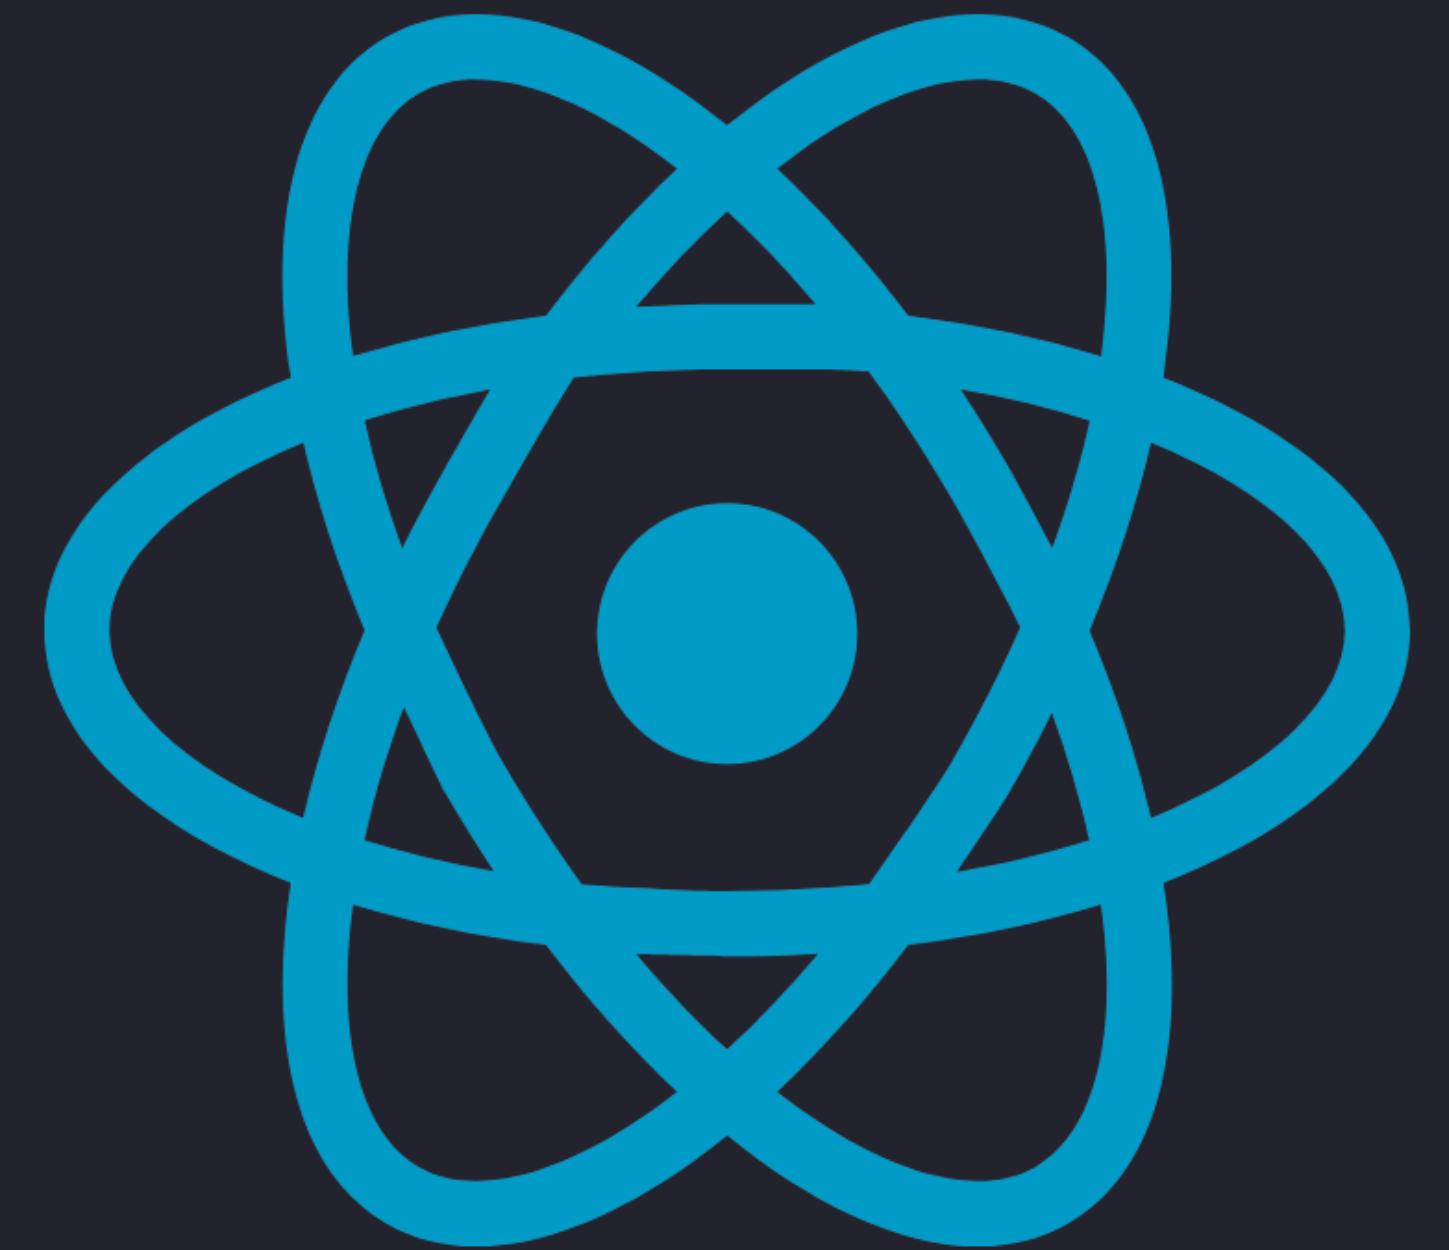


Declarative Library

- Declarative: Describes what should be done, focusing on the desired outcome, with the system handling the implementation details (what to do).
- Imperative (the opposite): Specifies how to do something, providing step-by-step instructions, requiring manual management of implementation details (how to do it).
- React is declarative because it lets you describe what the UI should look like based on the data, instead of giving step-by-step instructions for rendering.

Components, Props & States


The Core Concepts of React

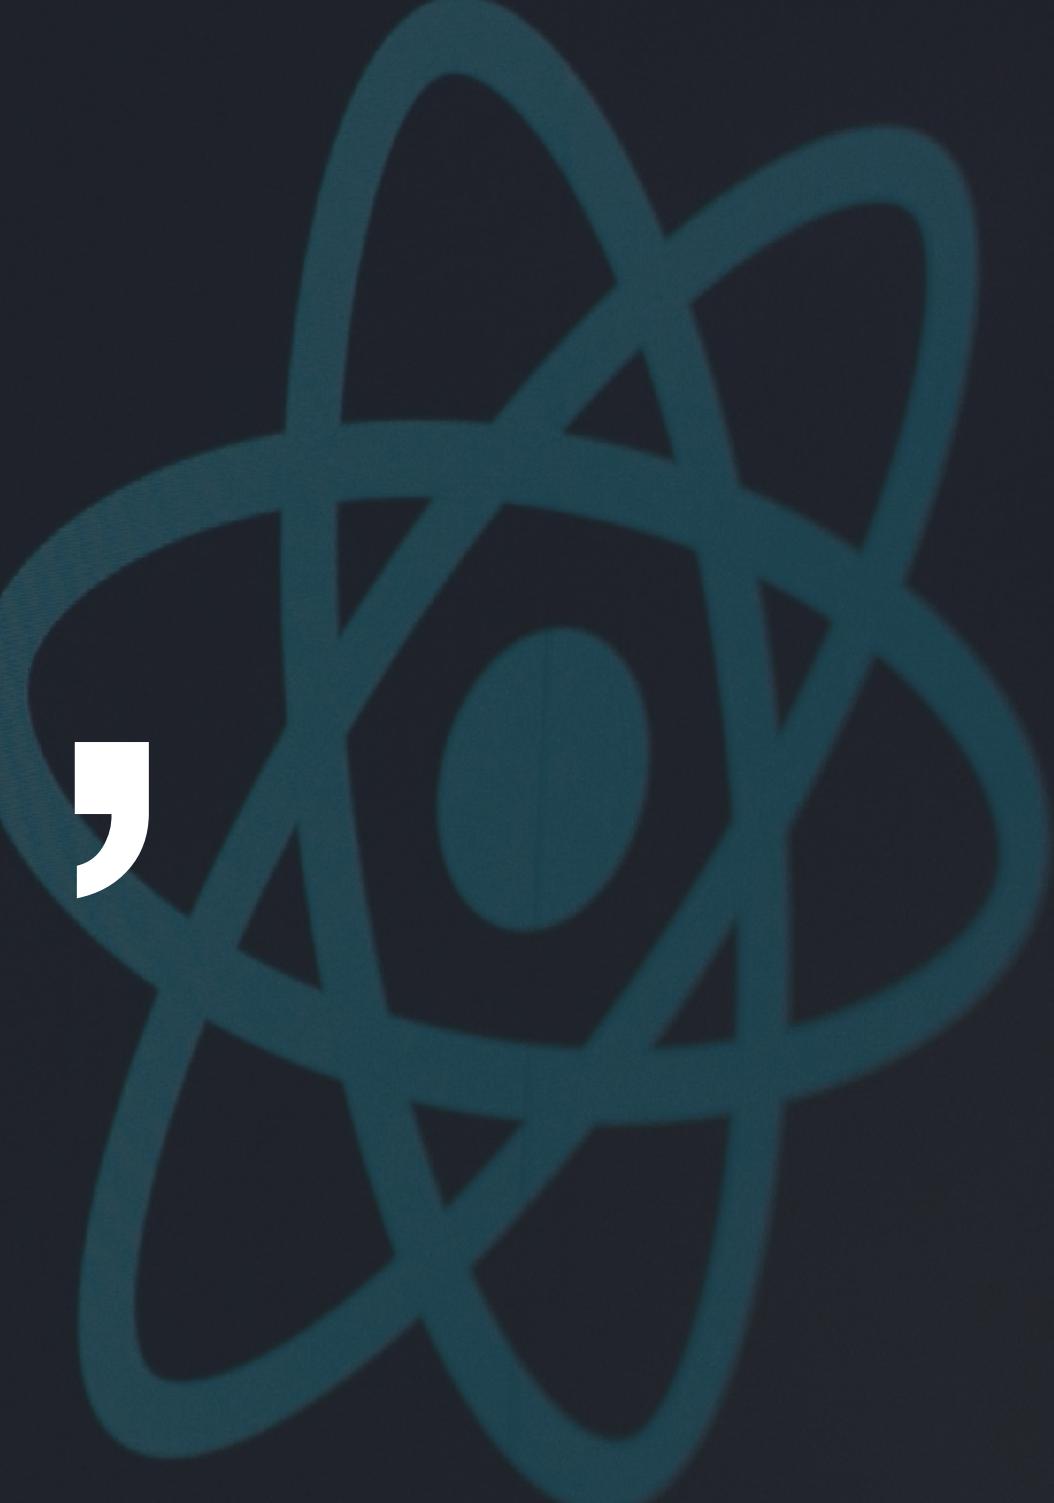

Thinking in React

In React, UI is a **function** of **props & states**. The UI is built with (function) **Components**.


Edit src/App.js and save to reload
Learn React

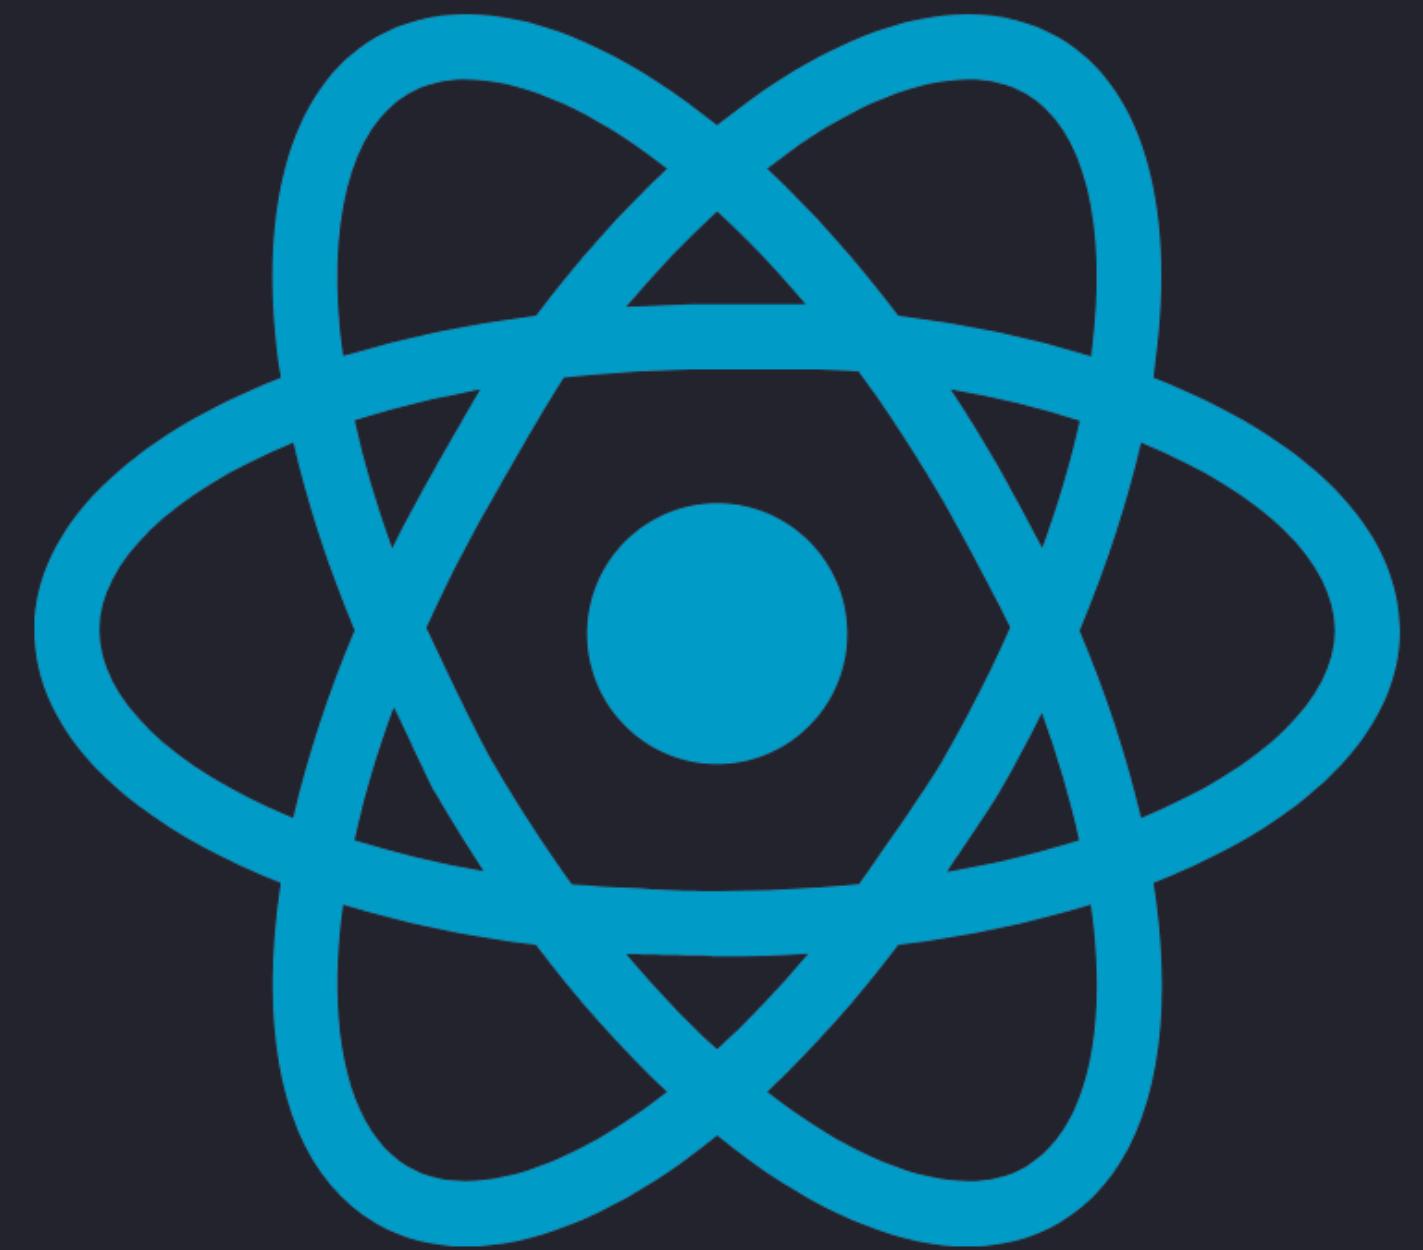


But how?

- React creates a Virtual DOM instead of manipulating directly with the browser's DOM.
- React makes the changes in Virtual DOM and compares it to the browser DOM.
- Then React detects what's needs to be changed in the browser DOM and changes **only** what needs to be changed!


React Virtual DOM

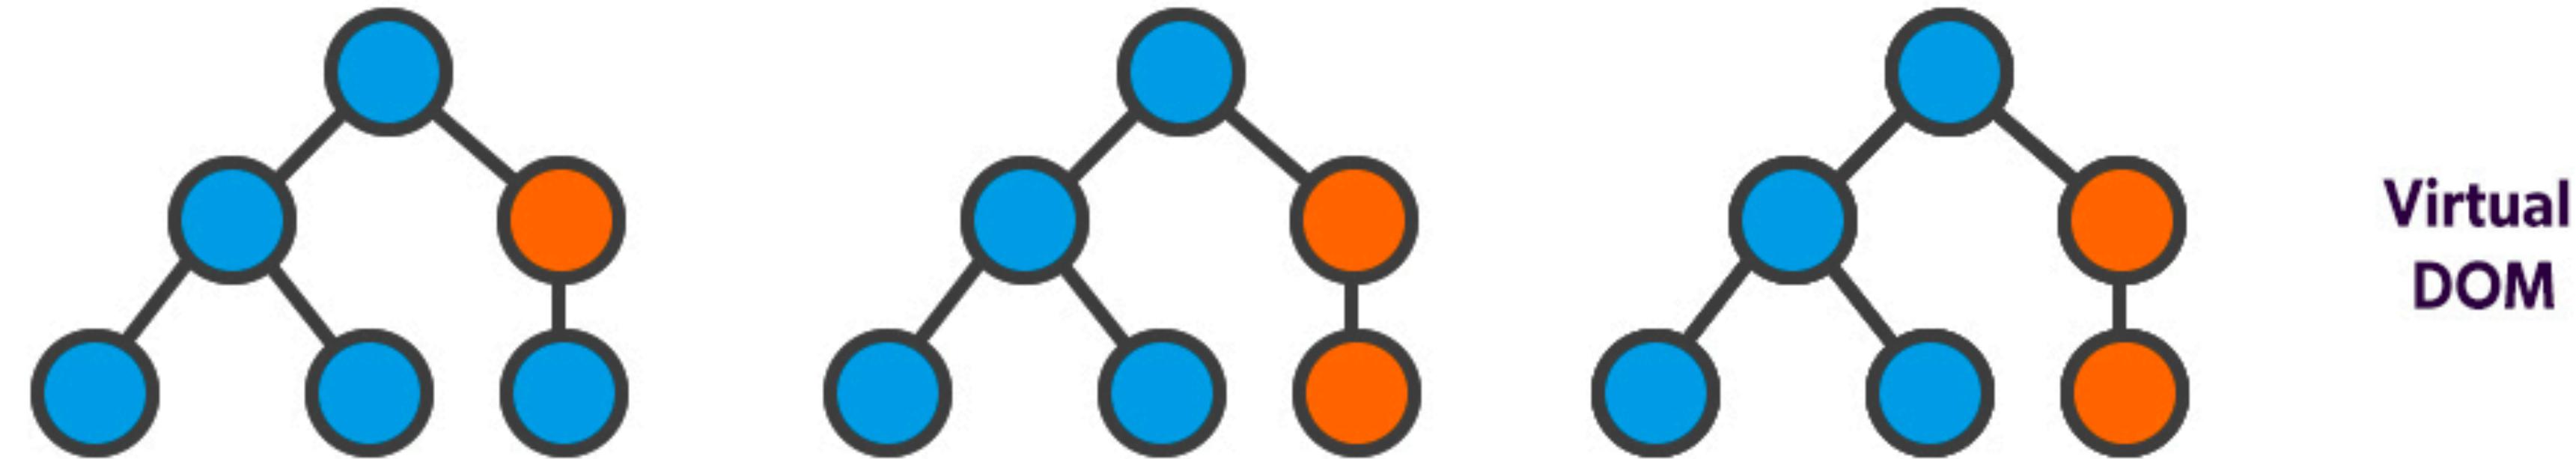

Statechange → Compute Diff → Re-render

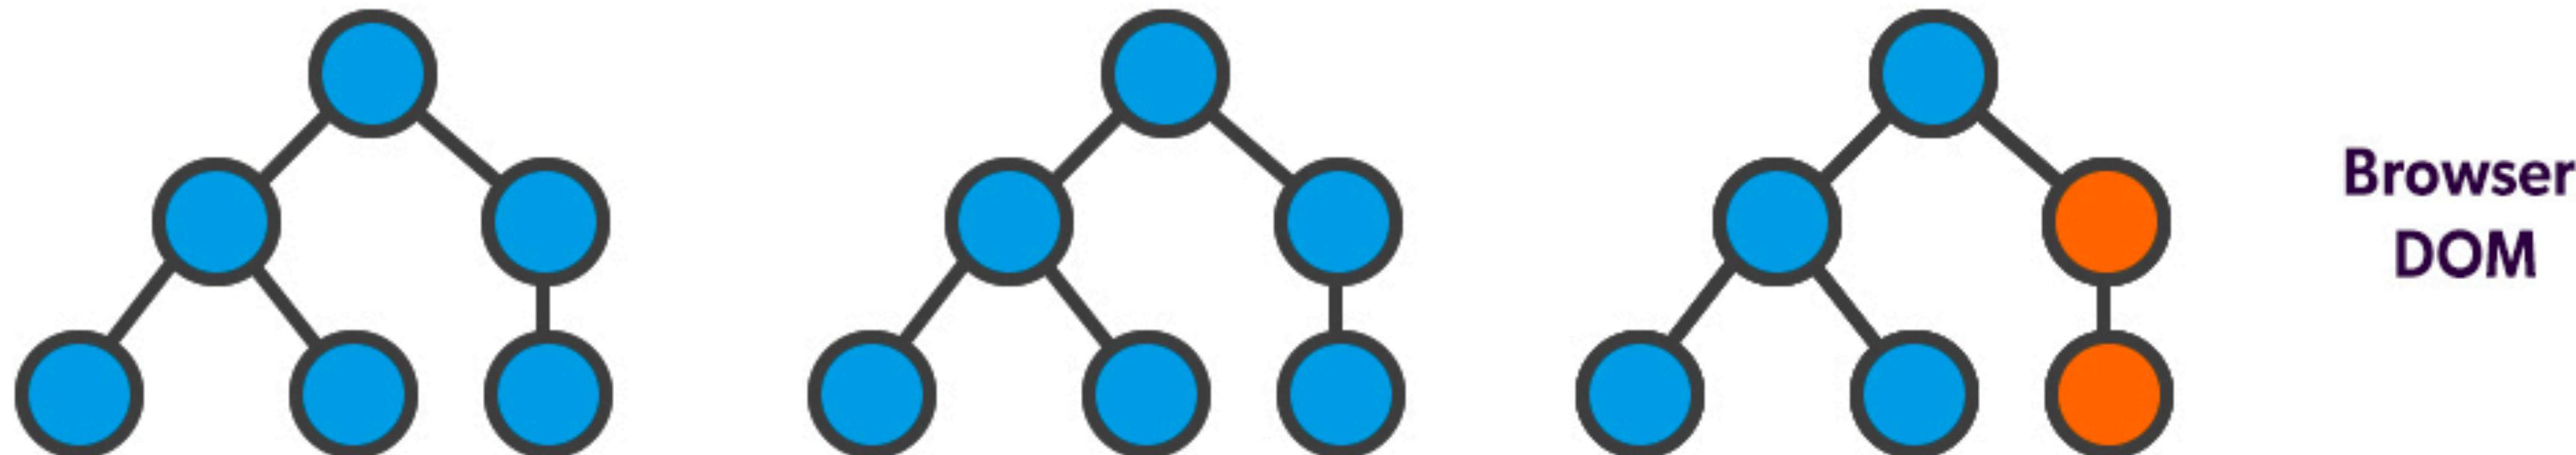


React Virtual DOM

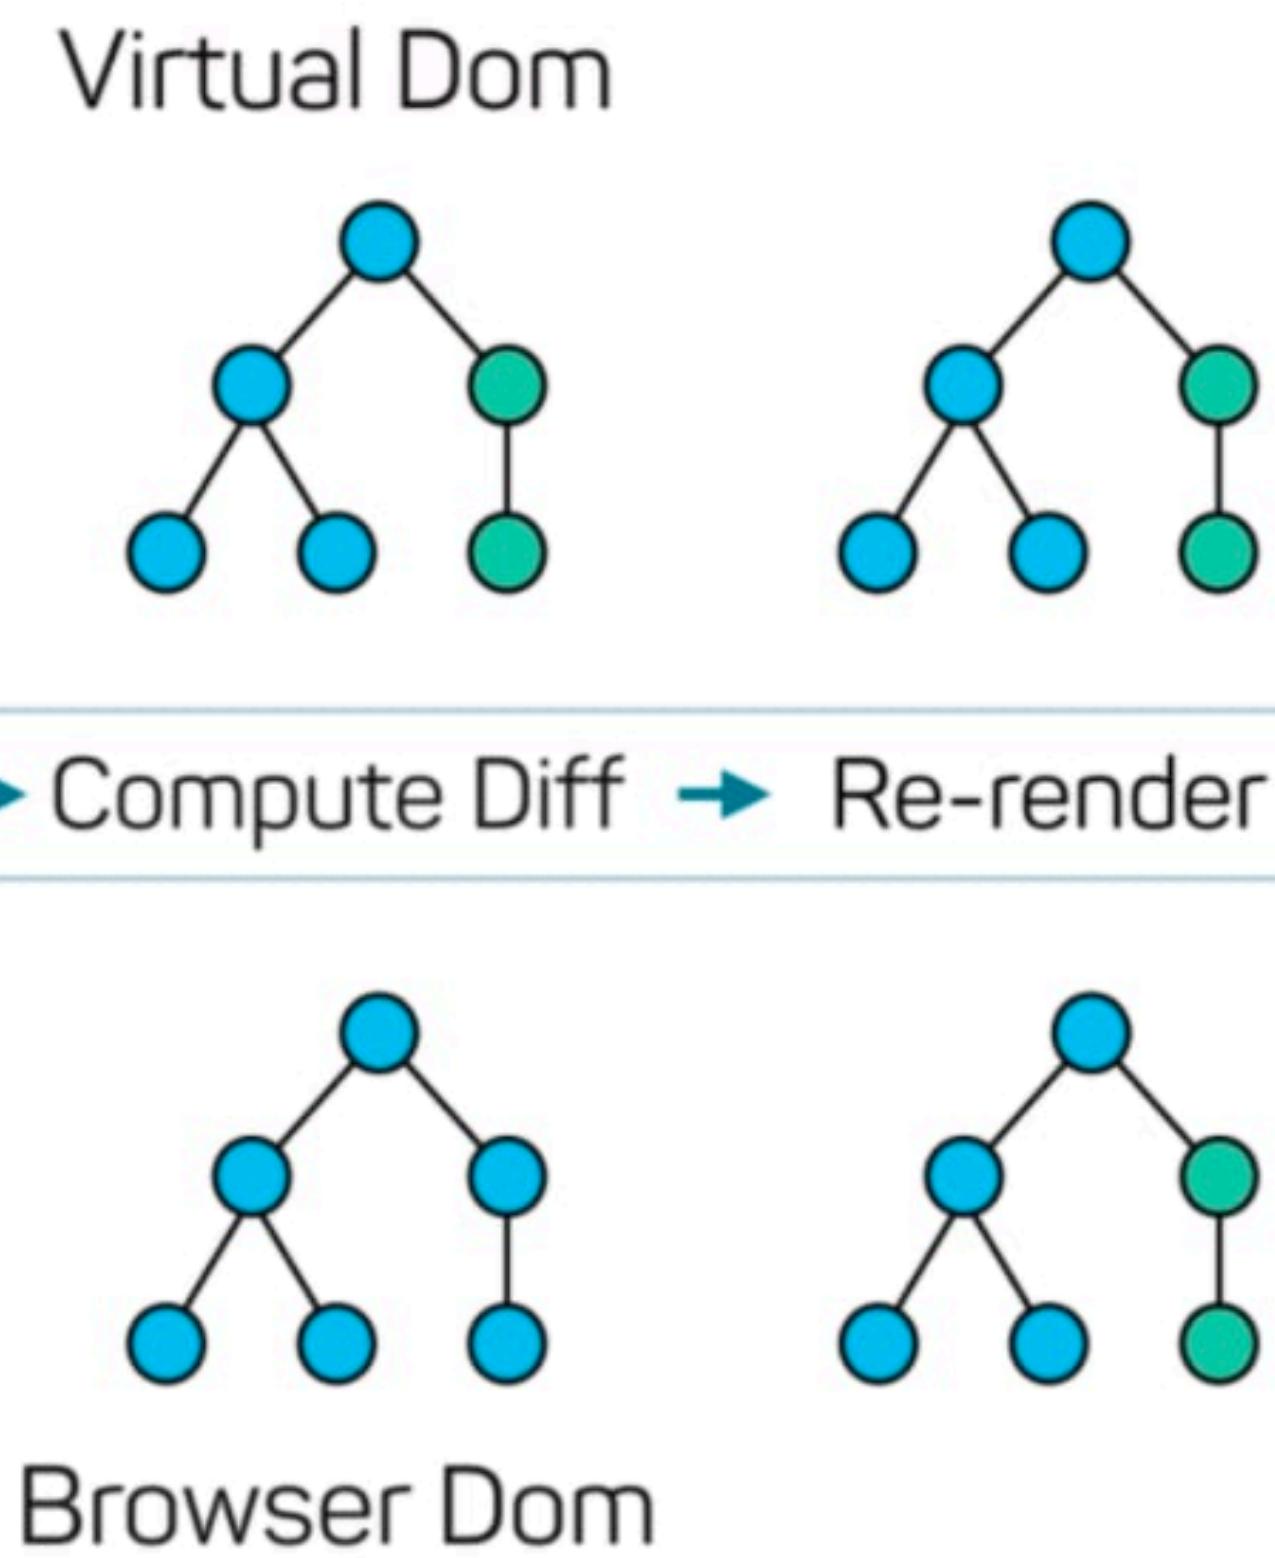

“The virtual DOM (VDOM) is a programming concept where an ideal, or “virtual”, representation of a UI is kept in memory and synced with the “real” DOM by a library such as ReactDOM.”

“You tell React what state you want the UI to be in, and it makes sure the DOM matches that state. This abstracts out the attribute manipulation, event handling, and manual DOM updating [...].”


The React UI Cycle

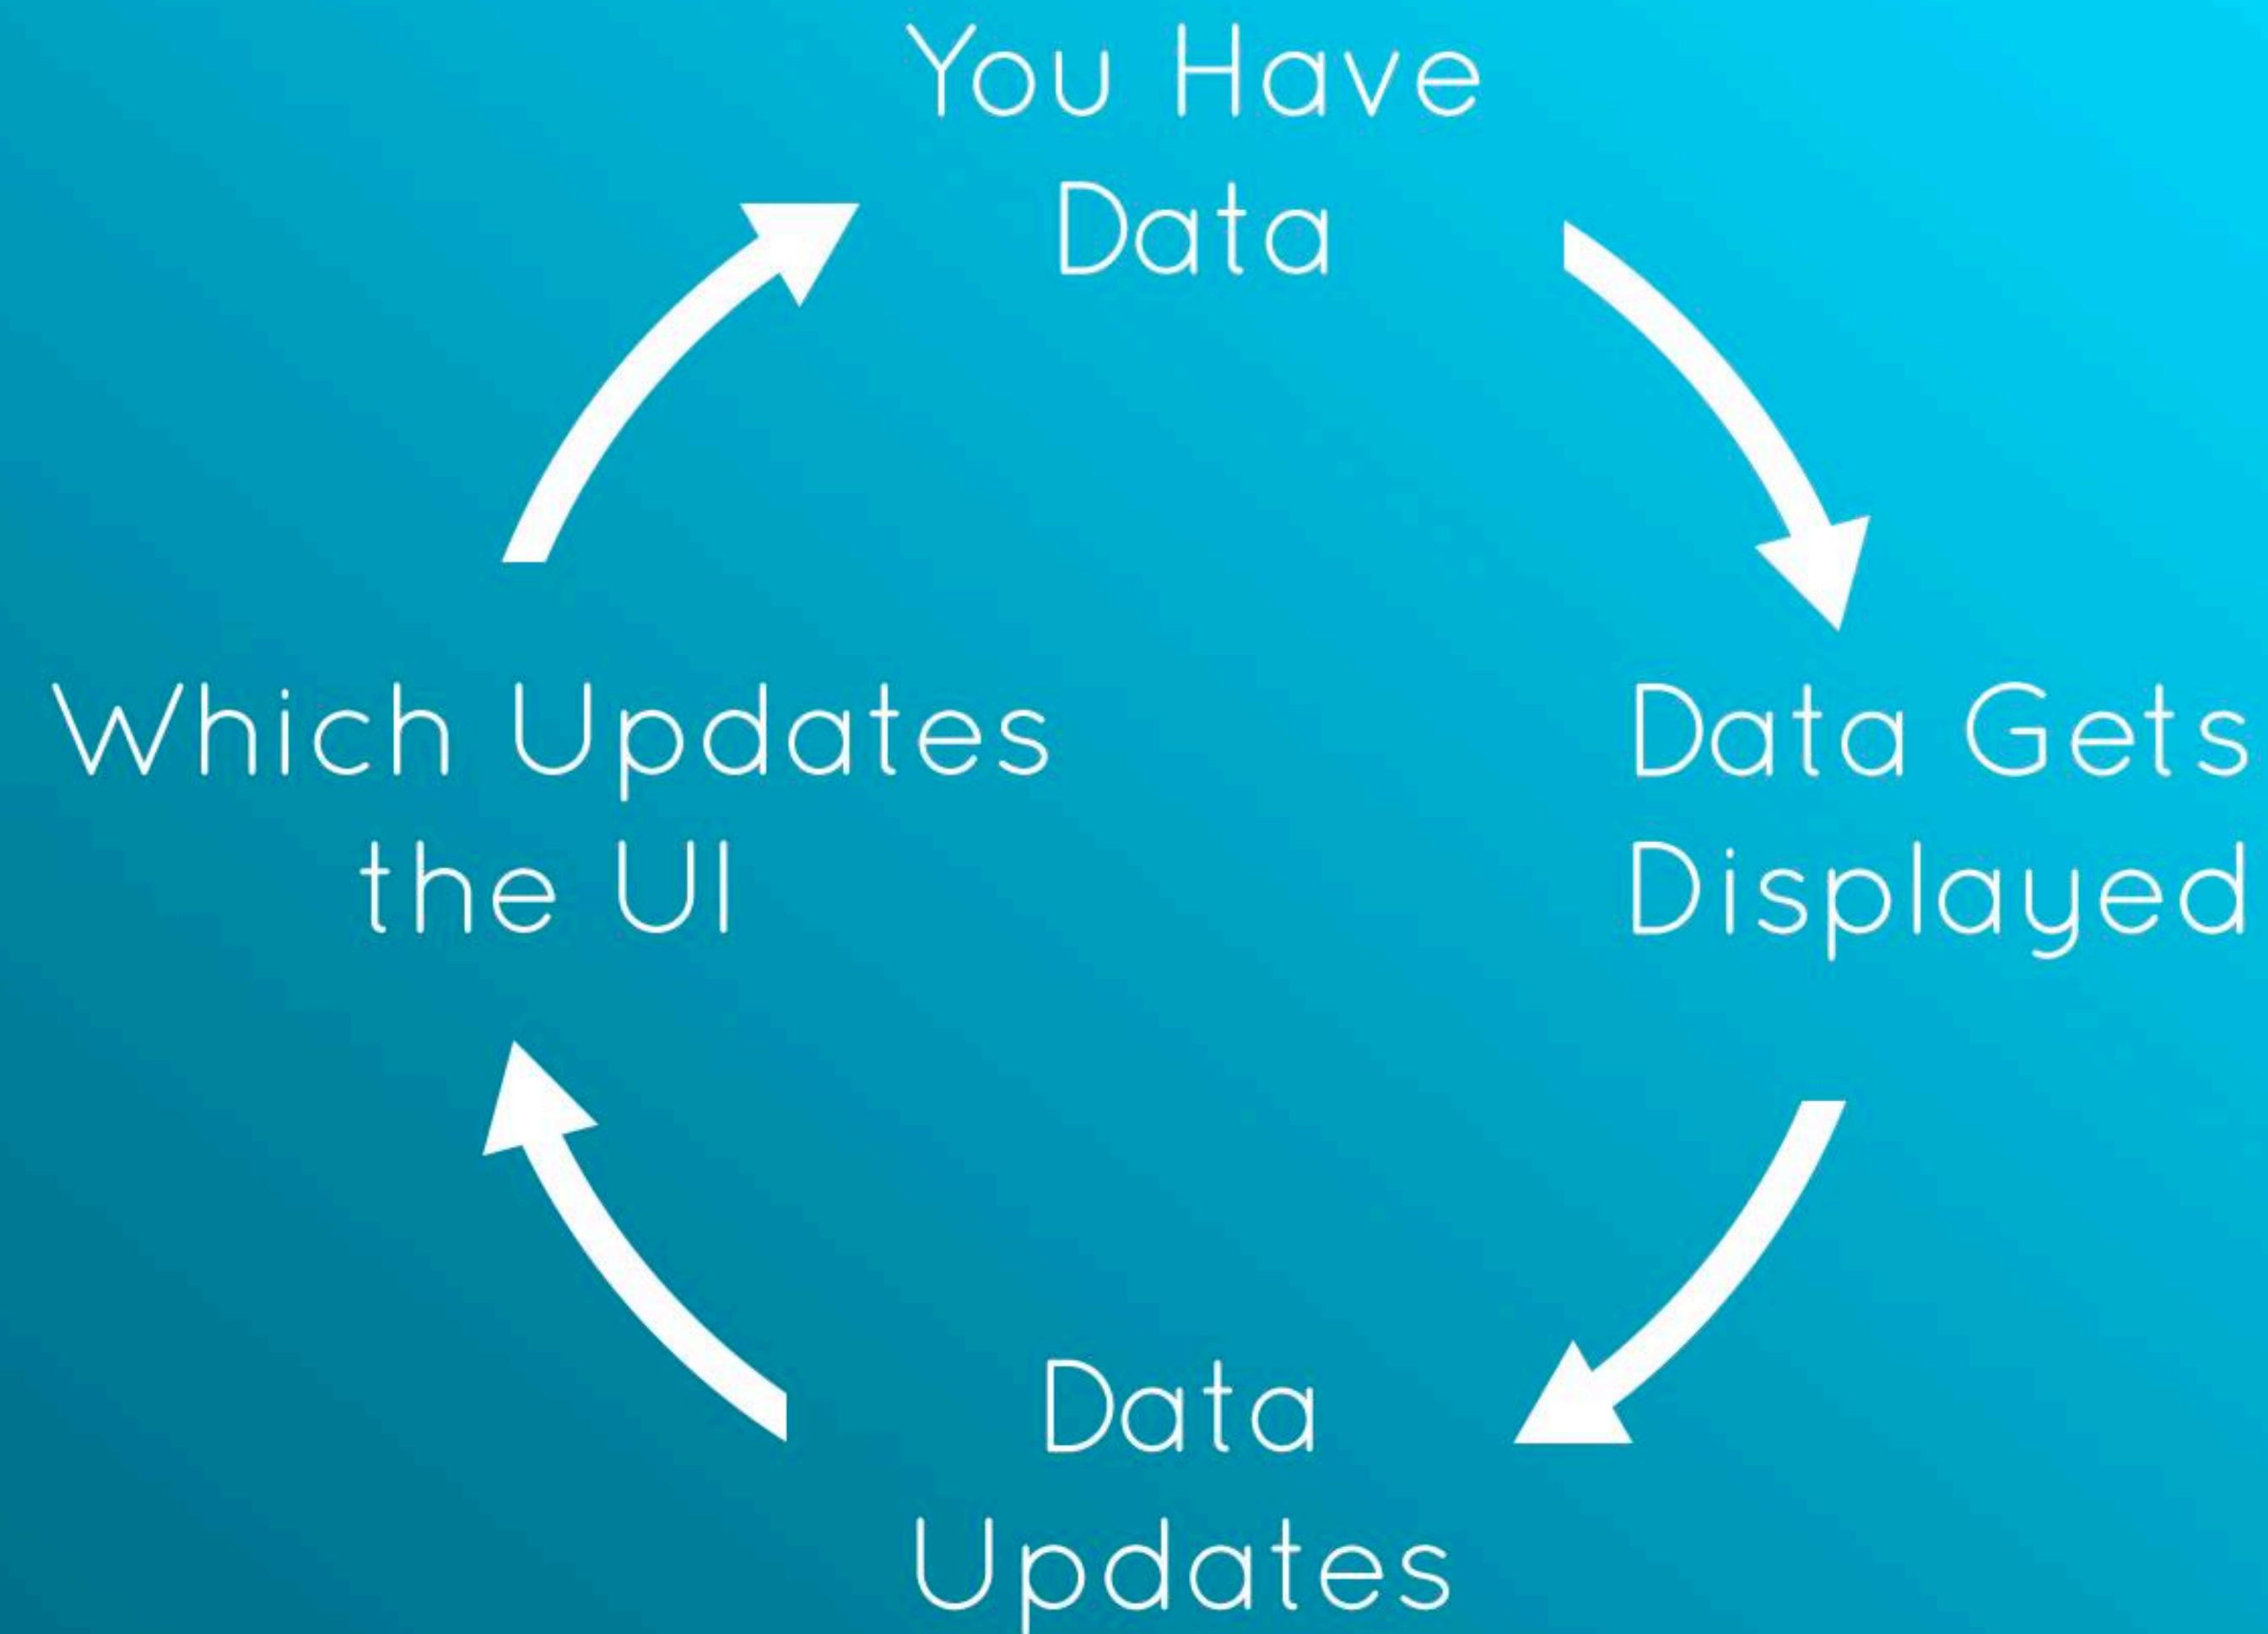

This happens AUTOMATICALLY
once you define components

HTML vs the DOM

DOM

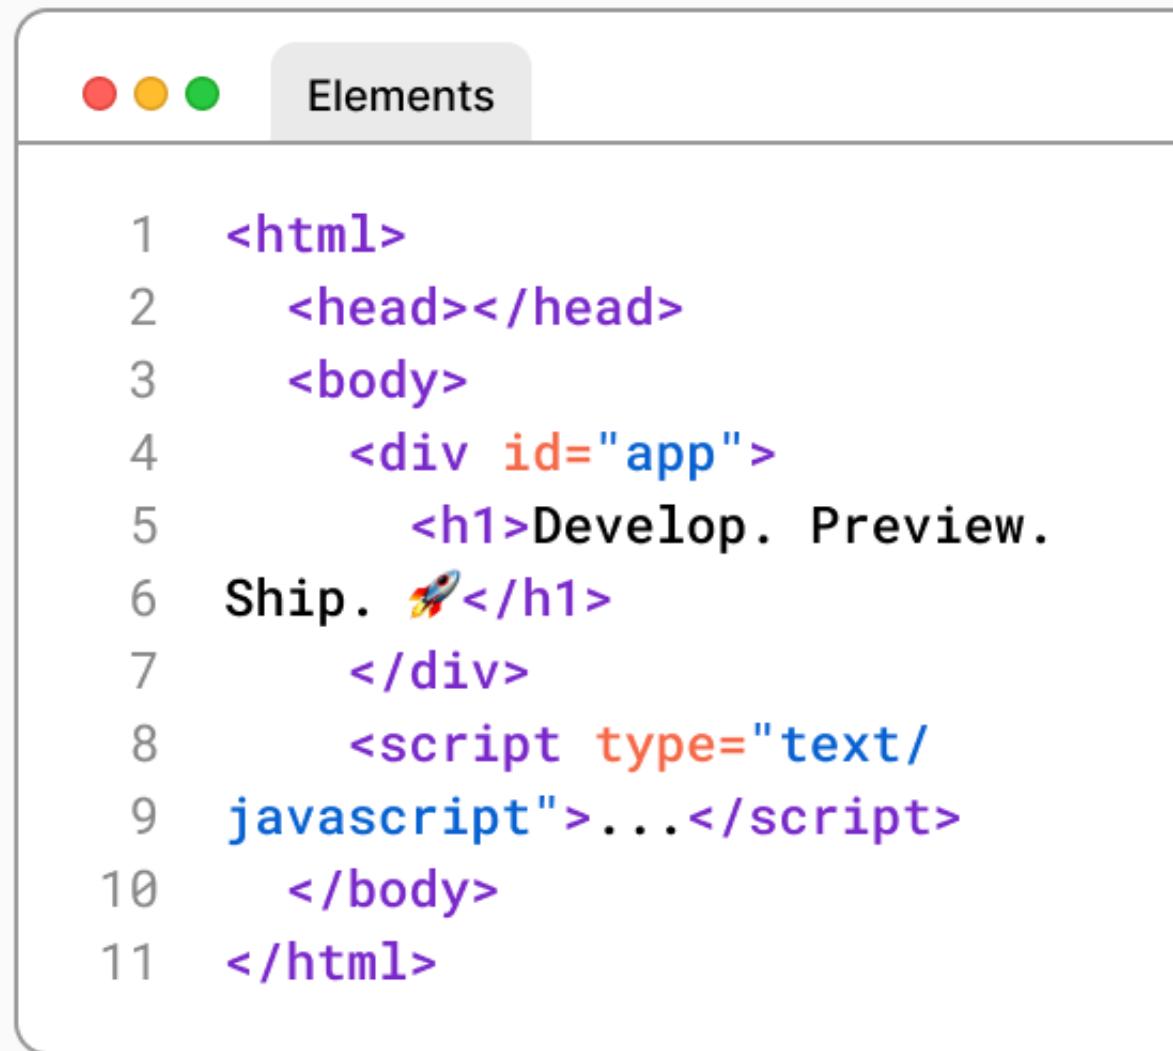


The DOM tree visualization shows the following structure:

- <html>
- <head></head>
- <body>
- <div id="app">
- <h1>Develop. Preview.
Ship. 🚀</h1>
- </div>
- <script type="text/javascript">...</script>
- </body>
- </html>

Line numbers 1 through 11 are shown on the left.

SOURCE CODE (HTML)

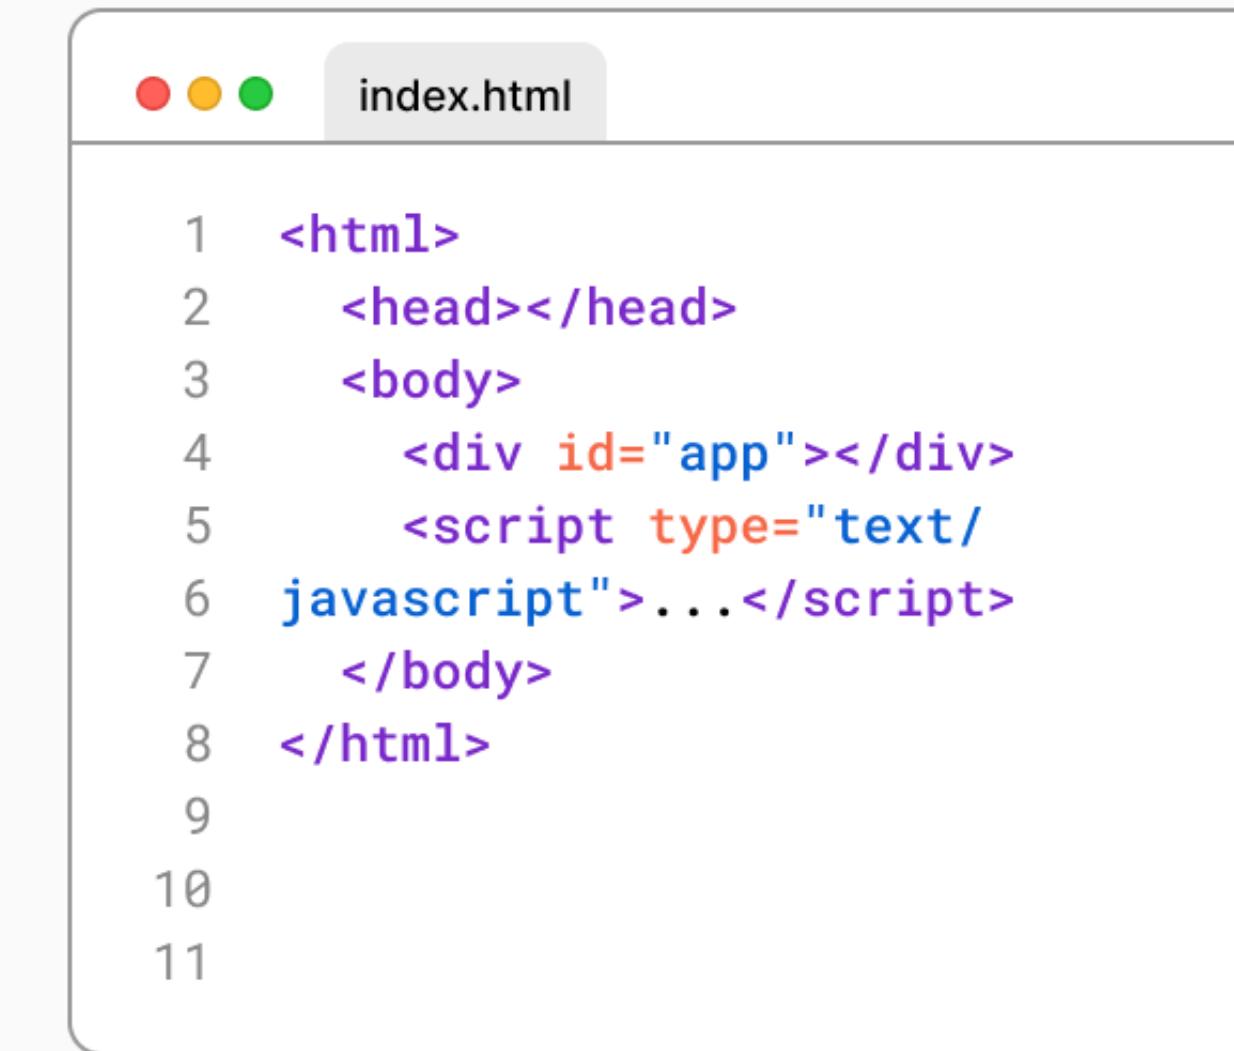


The source code editor shows the following HTML file:

```
index.html
```

```
1 <html>
2   <head></head>
3   <body>
4     <div id="app"></div>
5     <script type="text/
6 javascript">...</script>
7   </body>
8 </html>
```

Line numbers 1 through 11 are shown on the left.

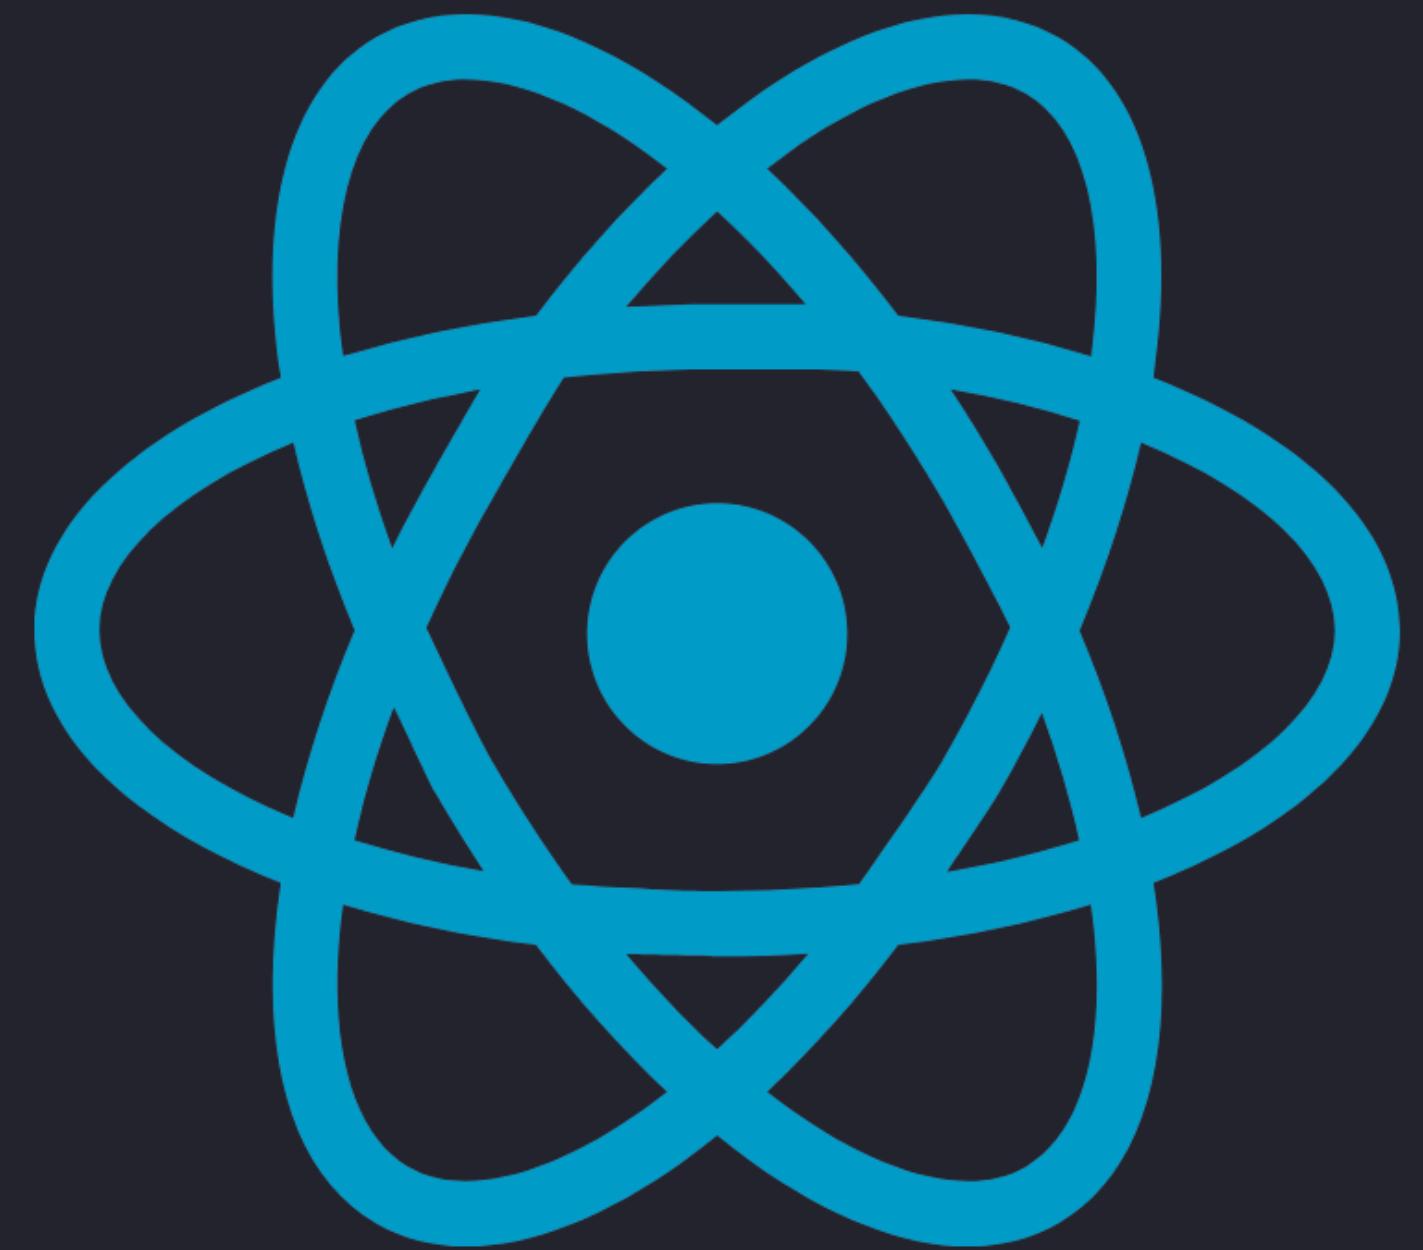

But why?


- It's so hard to work with the DOM
- DOM manipulation is slow.
- You must make sure the DOM is constantly updated and synchronised with the state of your data.
- React *reacts* to **changes** and updates the DOM automatically and performant without re-rendering all elements - only the changed elements.

Resources

React Resources

React Self-study

Guides & Tutorials

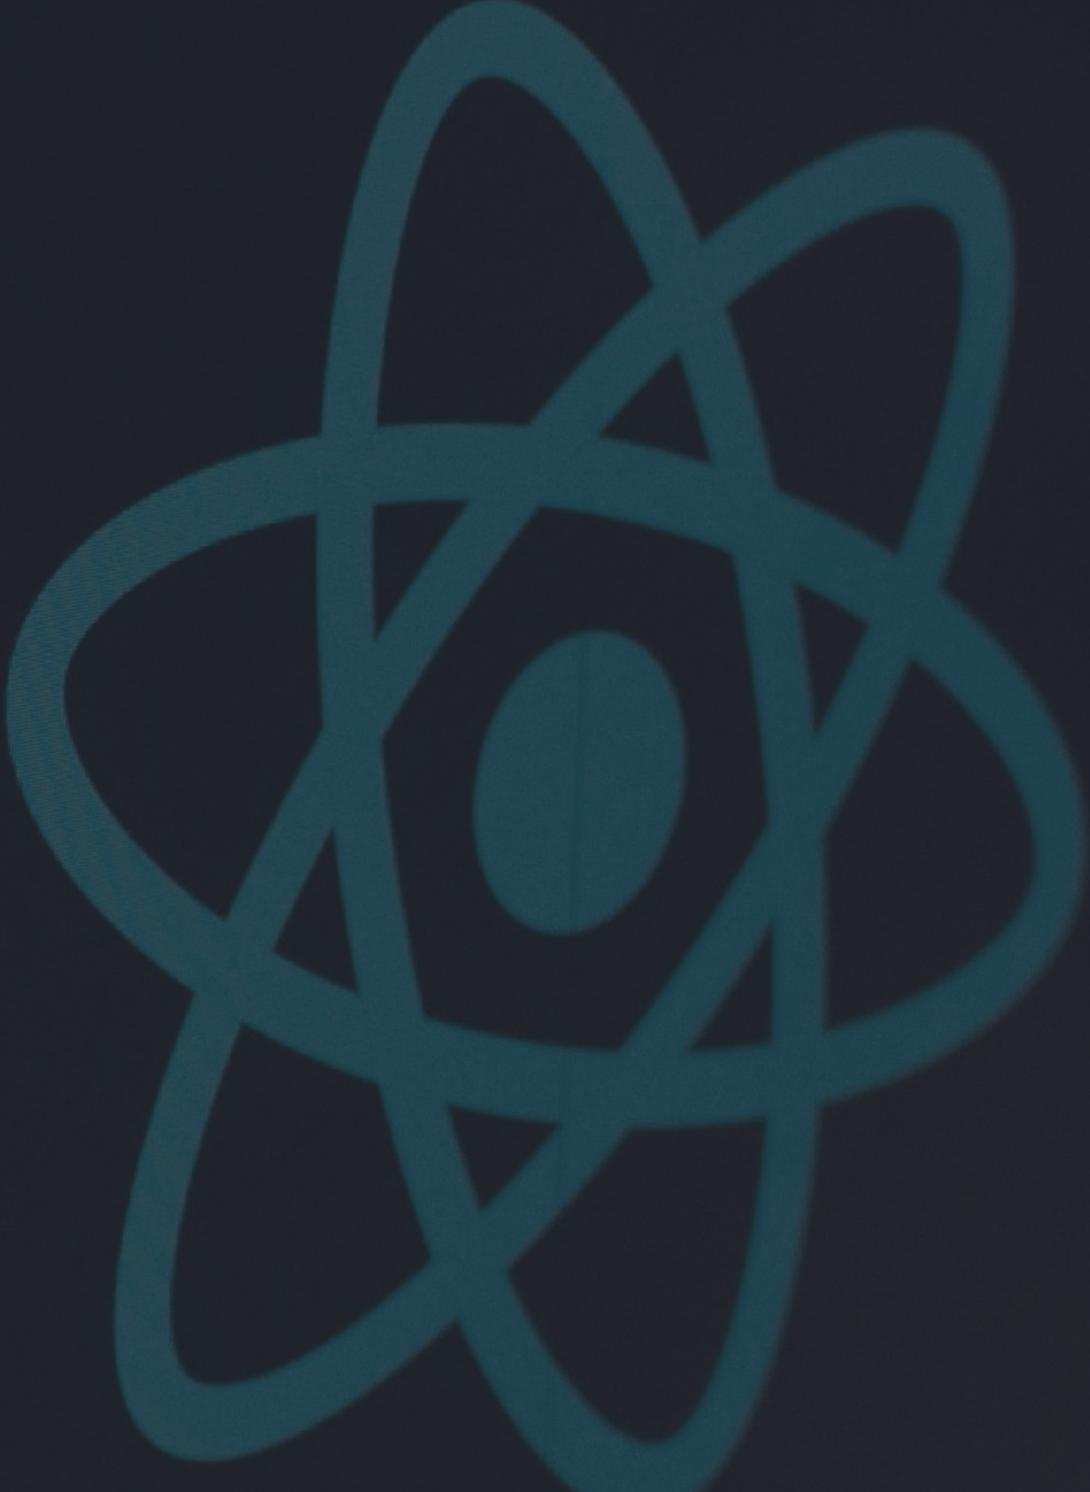

Edit src/App.js and save to reload
Learn React


React Docs

The screenshot shows the React Docs homepage in a dark-themed browser window. The title bar reads "Quick Start – React". The address bar shows the URL "react.dev/learn". The top navigation bar includes links for "Support Ukraine" and "Help Provide Humanitarian Aid to Ukraine". Below the navigation, there are tabs for "Learn" (which is active), "Reference", "Community", and "Blog". On the left, a sidebar titled "GET STARTED" features a "Quick Start" button, which is highlighted in teal. Other buttons include "Tutorial: Tic-Tac-Toe", "Thinking in React", and "Installation". A "LEARN REACT" section follows, with buttons for "Describing the UI", "Adding Interactivity", "Managing State", and "Escape Hatches". The main content area is titled "Quick Start" and contains the text: "Welcome to the React documentation! This page will give you an introduction to the 80% of React concepts that you will use on a daily basis." A callout box titled "You will learn" lists the following bullet points:

- How to create and nest components
- How to add markup and styles
- How to display data
- How to render conditions and lists
- How to respond to events and update the screen
- How to share data between components


Creating and nesting components

React apps are made out of *components*. A component is a piece of the UI (user interface) that has its own logic and appearance. A component can be as small as a button, or as large as an entire page.

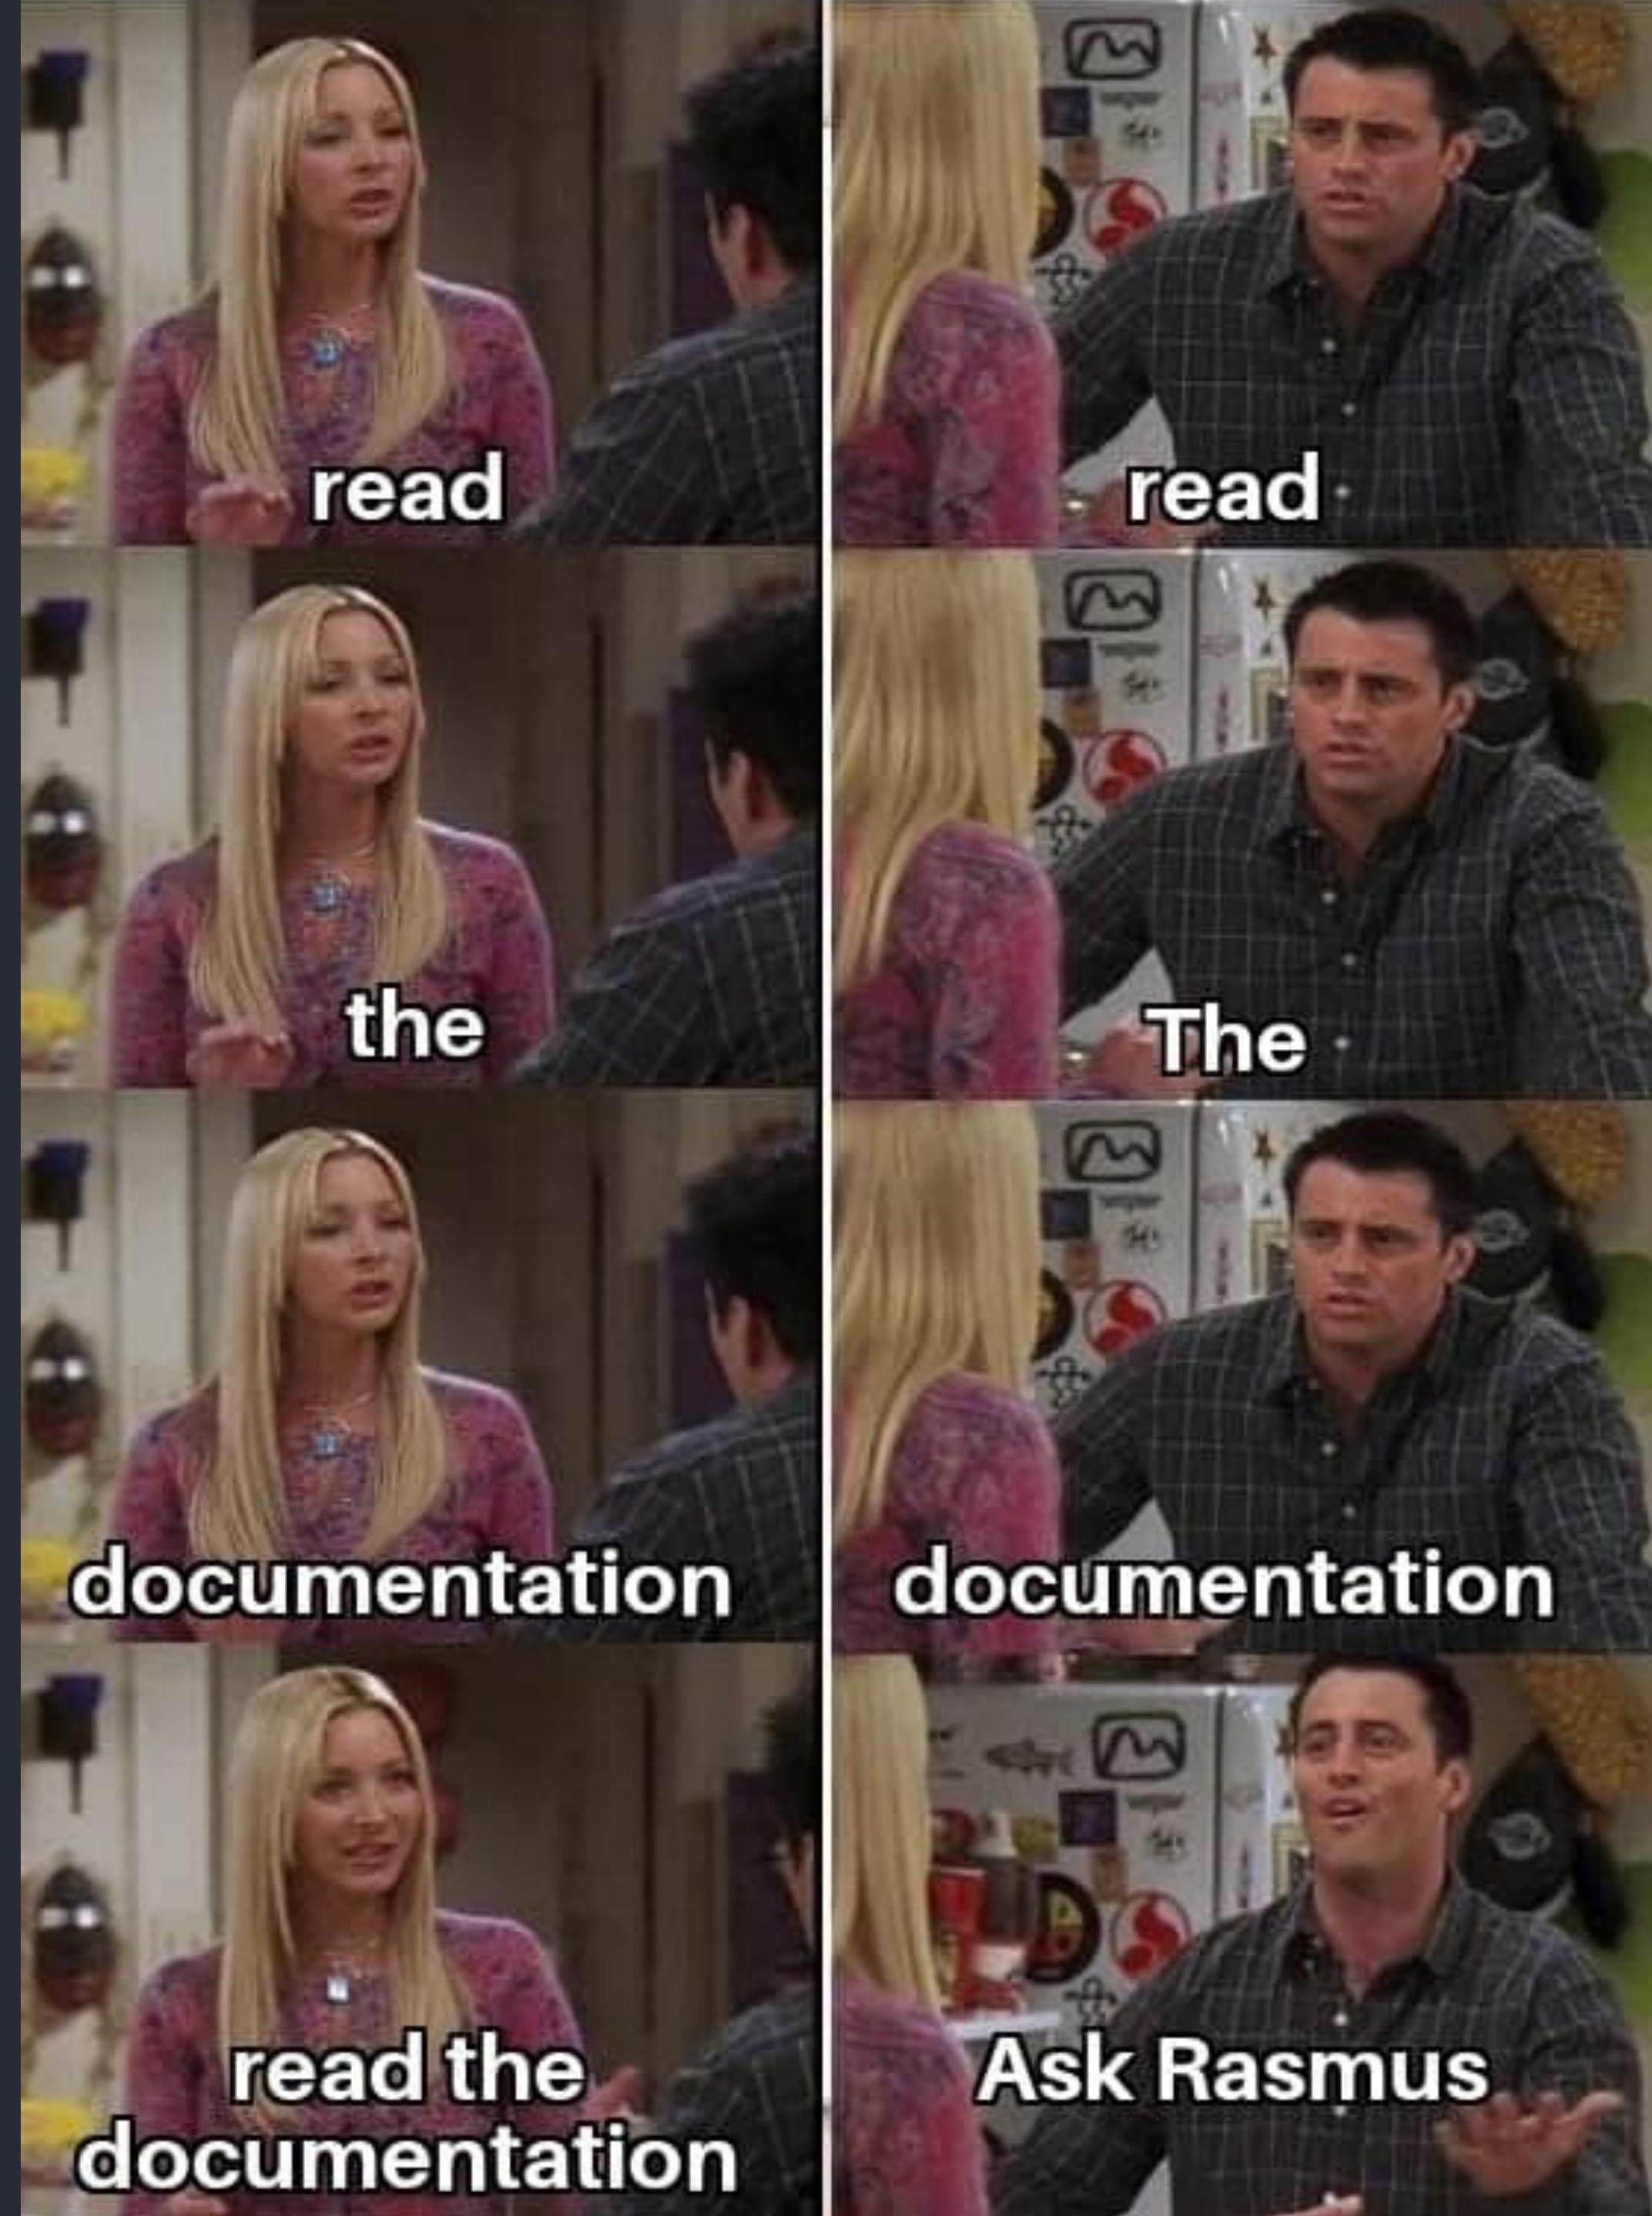

How to Think in React

Review slides & note questions

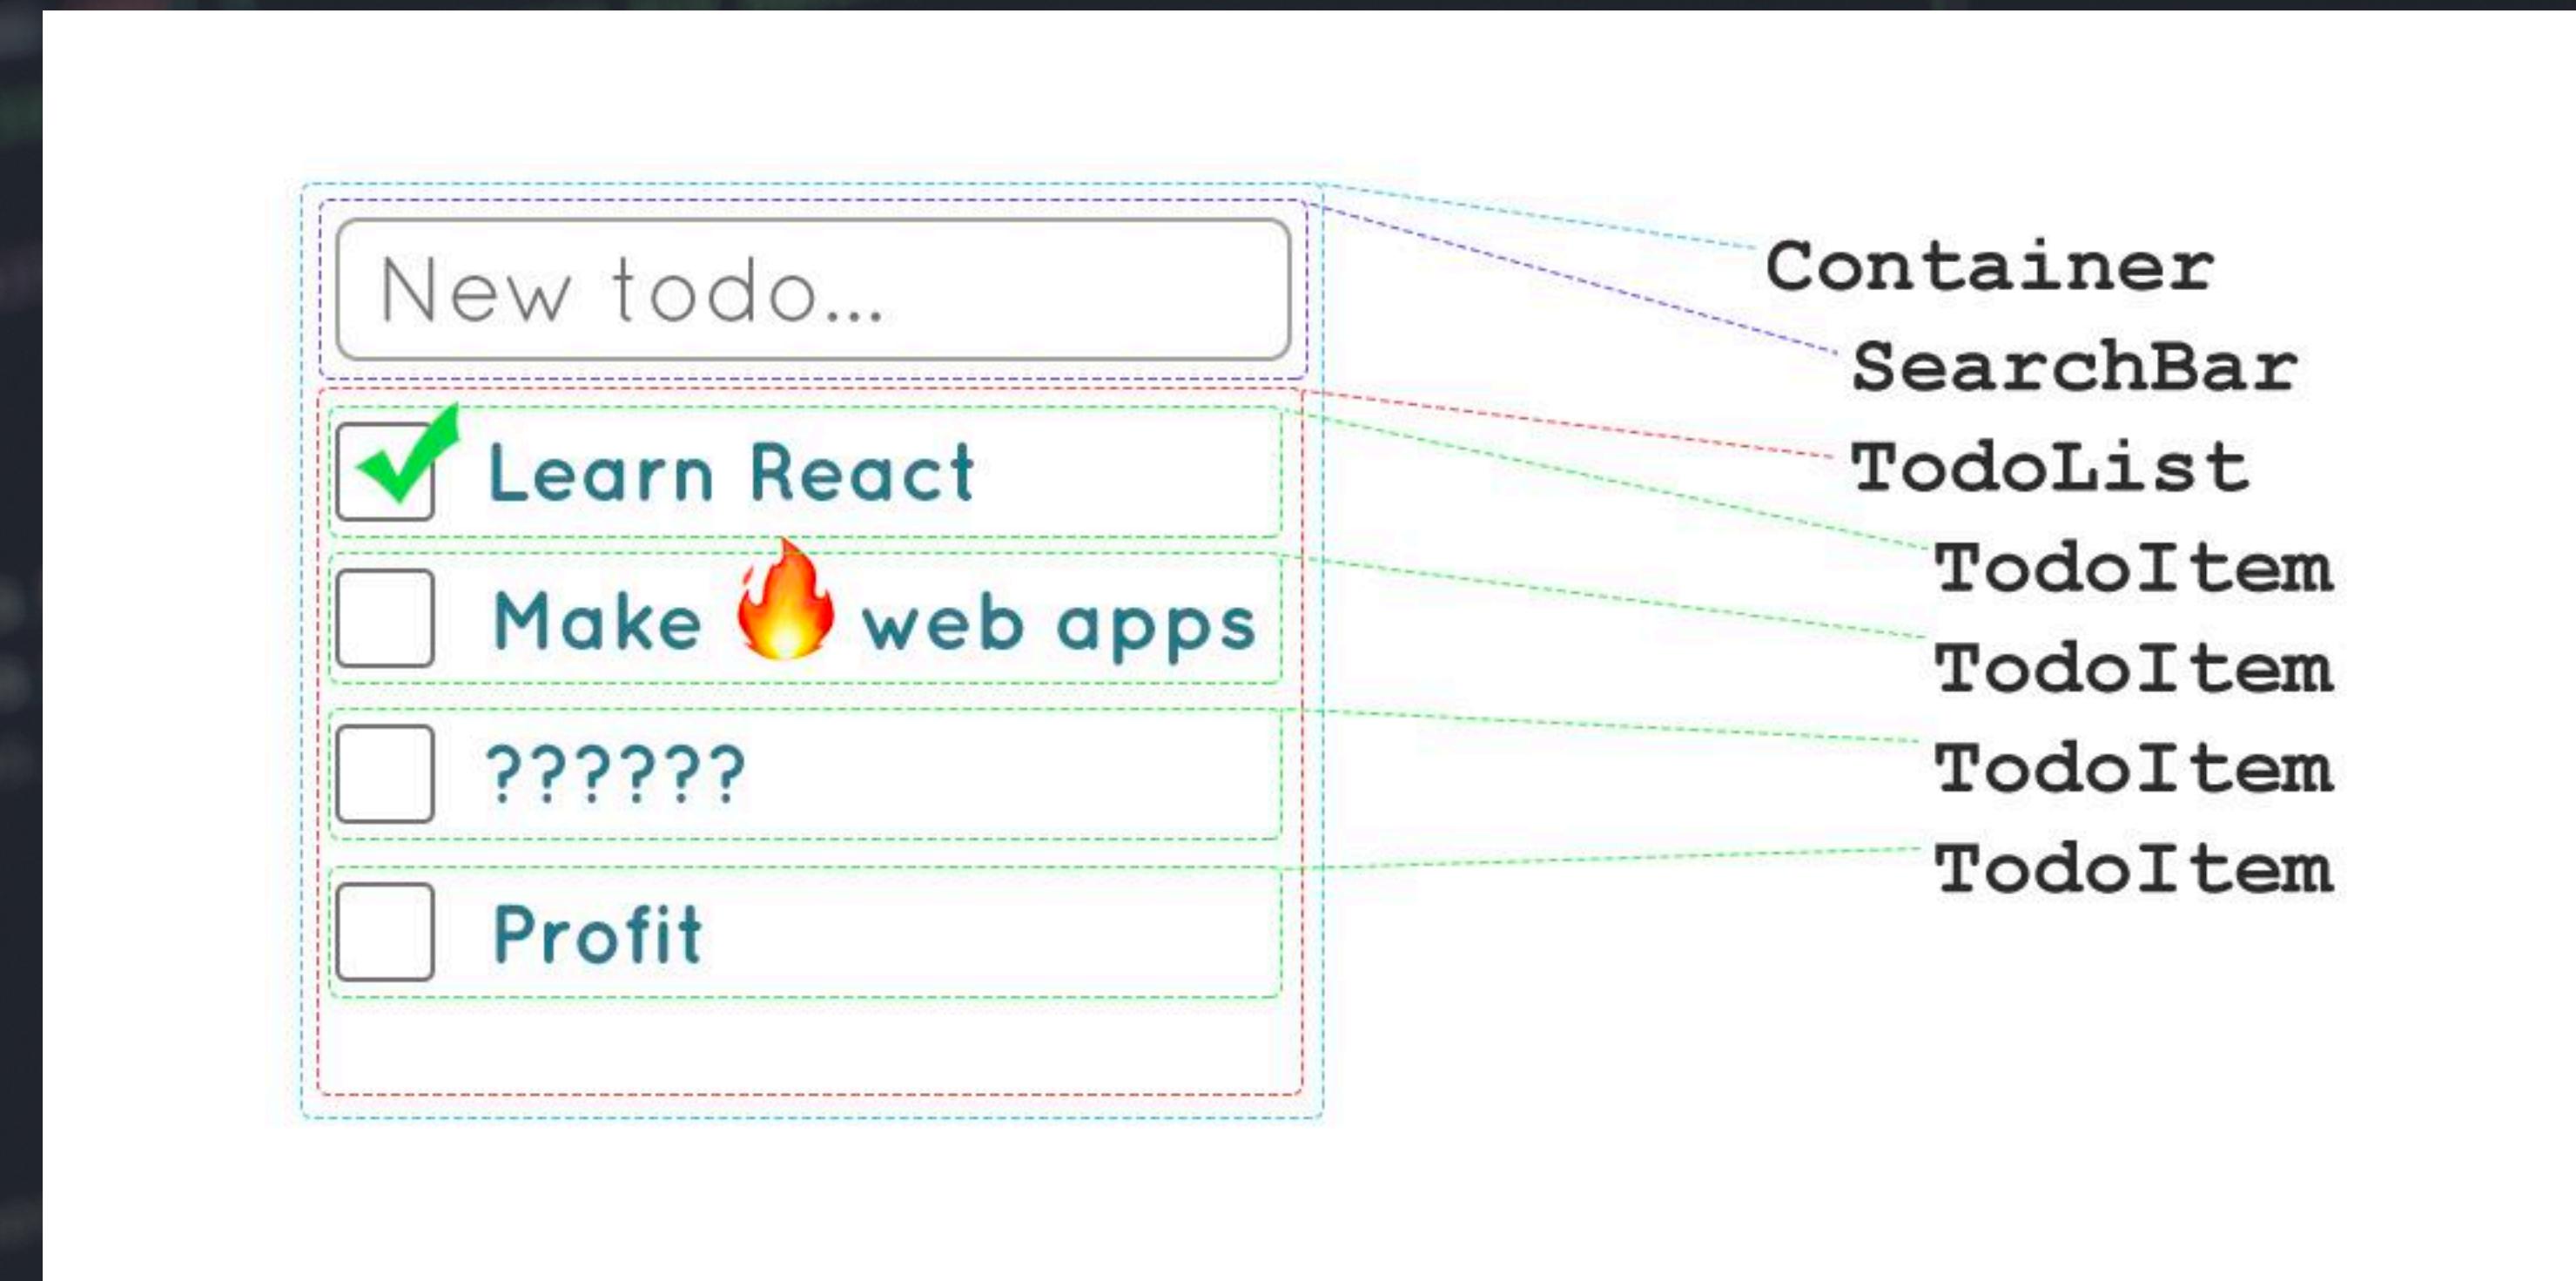


Function Component

- A Component is simply a function that returns HTML (JSX).
- Components are independent blocks of code.
- Components MUST return a single element. We can wrap in a parent element or use <></>.

```
function MyComponent() {  
  const name = "RACE";  
  
  return (  
    <section>  
      <h1>Hello, {name}</h1>  
    </section>  
  );  
}
```

create-react-app

Starter template for your react app

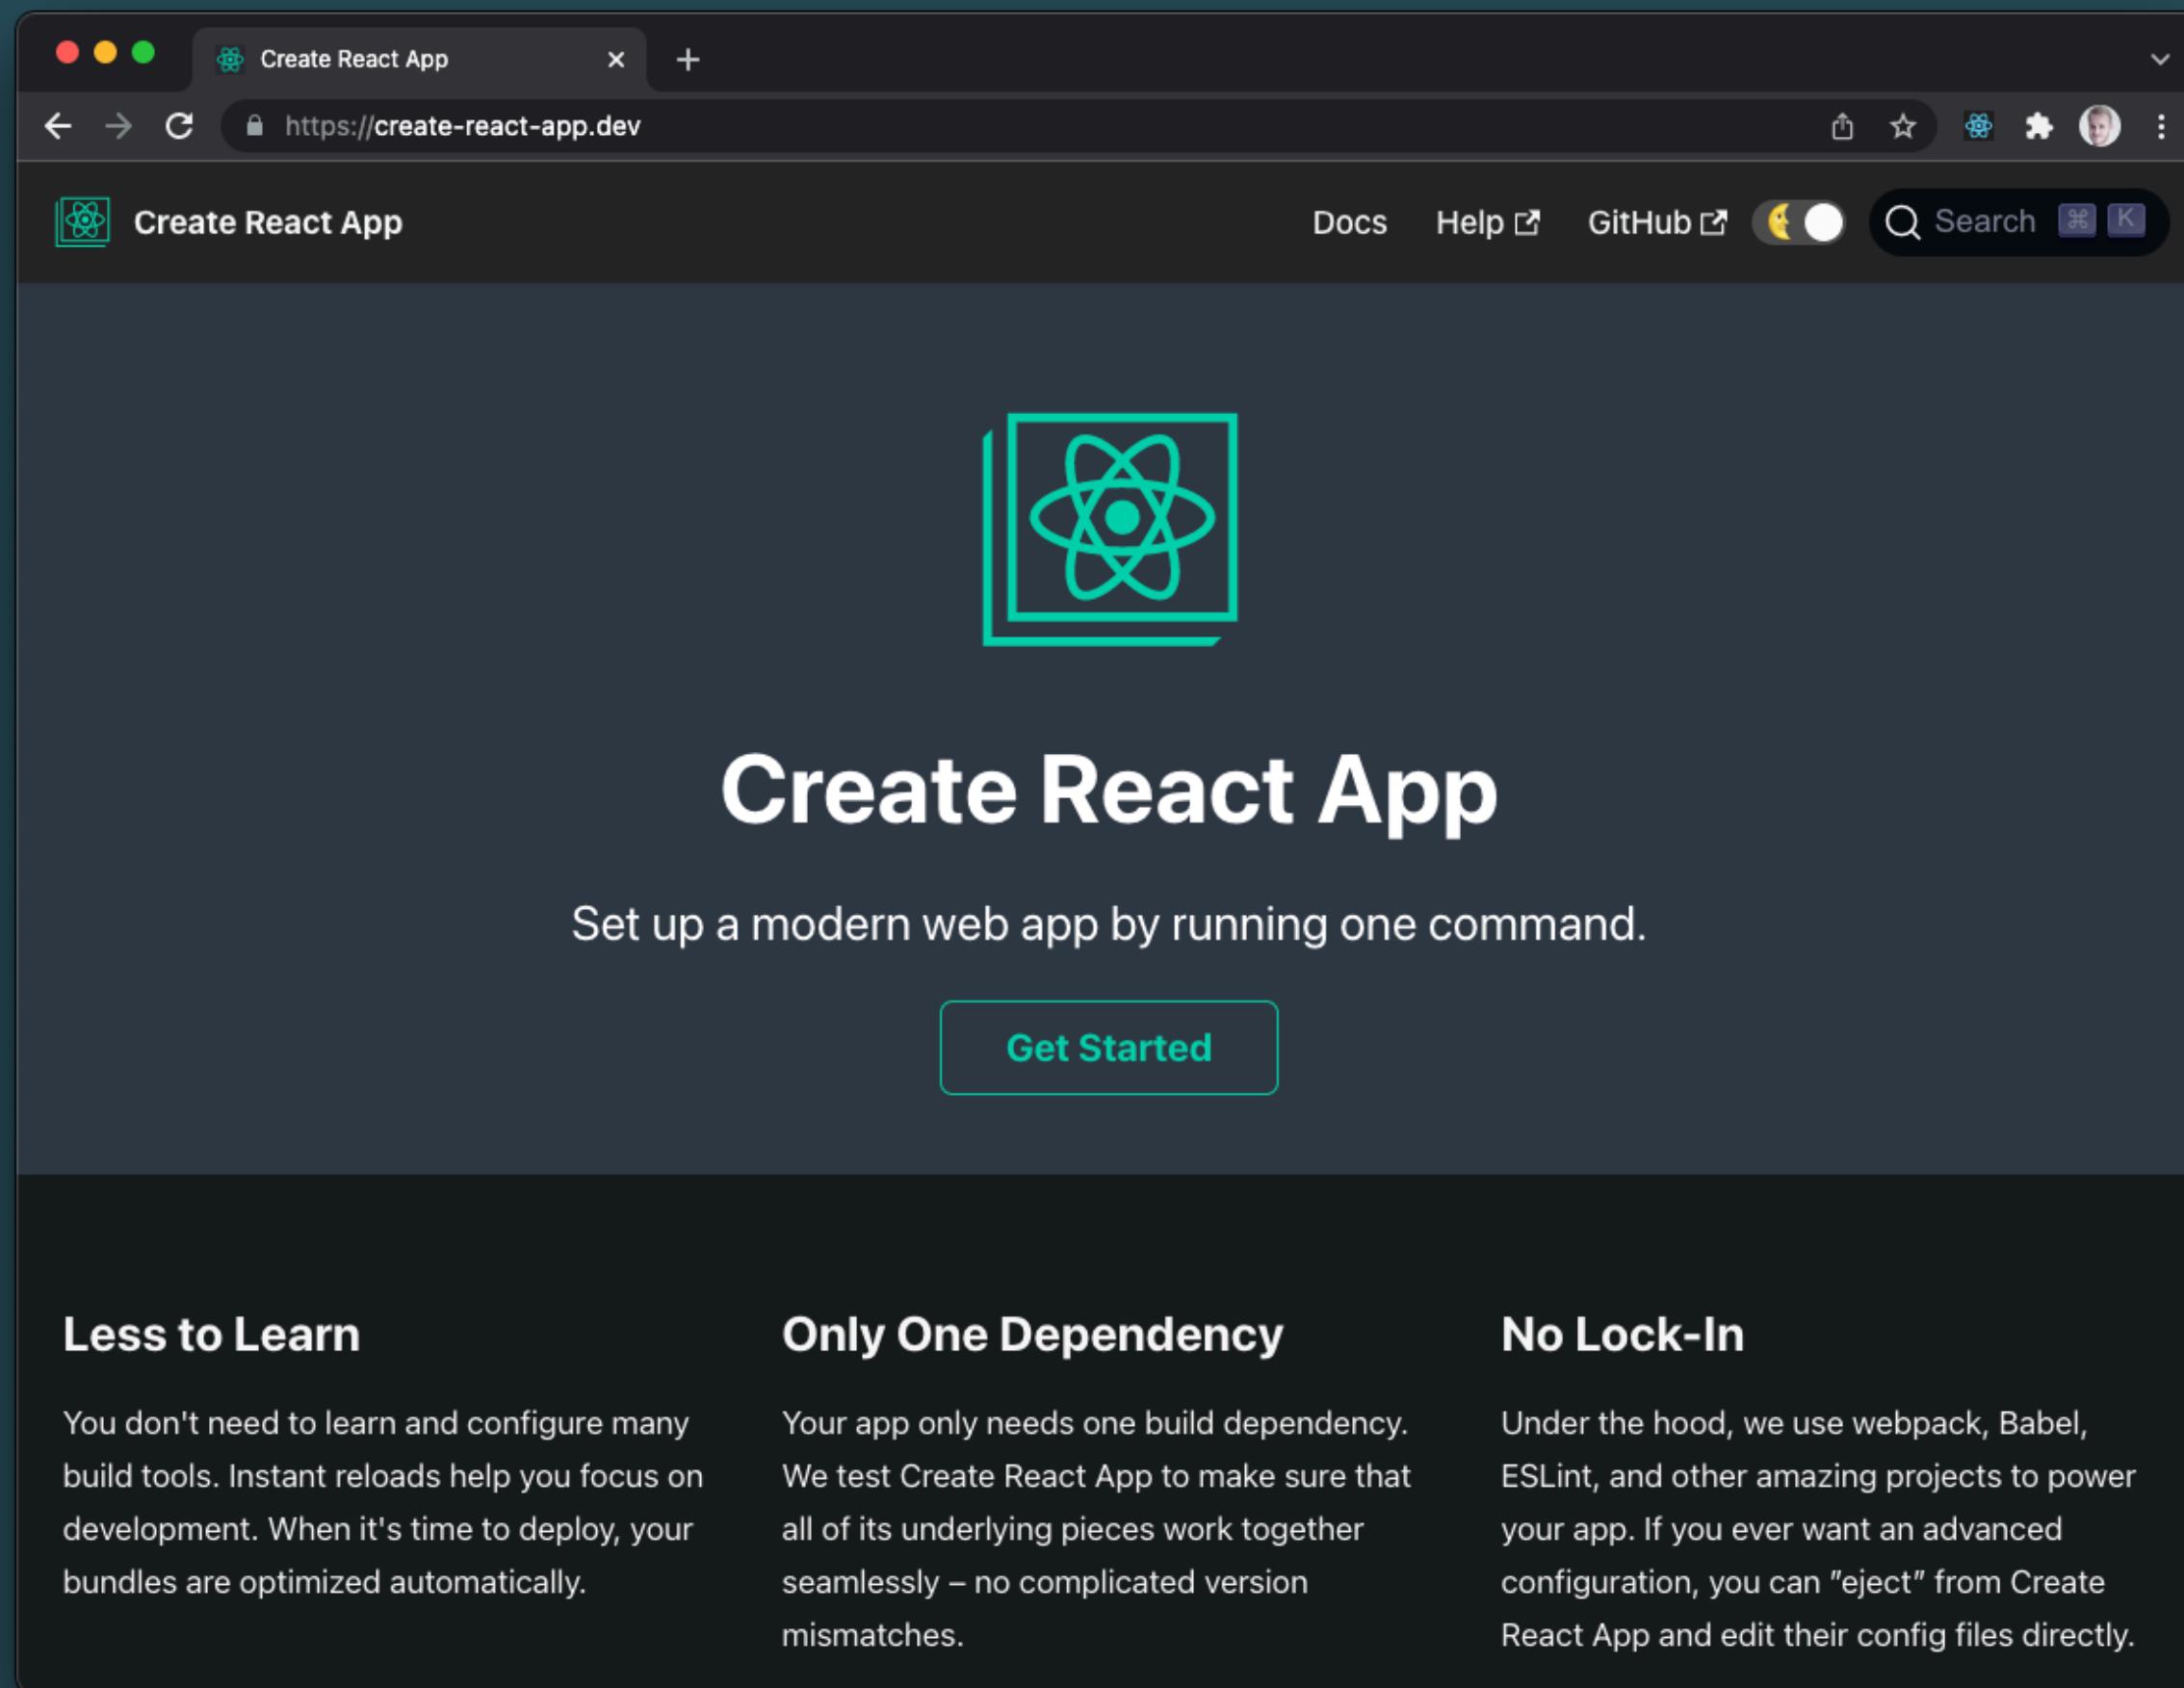

Generate create-react-app

1. Create a new react project and explore App.js and the App component.
2. Create a new component called Person. Inside of the Person component, define a const name with a value. Return the name variable in an h2 wrapped in an article tag.
3. Render Person component inside of your App component.
4. Render several Person components inside of your App component.



JSX

JavaScript XML

- Allow us to write HTML in JavaScript.
- Makes it easier to write and add HTML in React.
- We can create our own tags.
- We MUST close all tags.

// With JSX

```
const myelement = <h1>I Love JSX!</h1>;
```

// Without JSX

```
const myelement = React.createElement("h1", {}, "I do not use JSX!");
```

JSX

JavaScript XML

- Allow us to write HTML in JavaScript.
- Makes it easier to write and add HTML in React.
- We can create our own tags.
- We MUST close all tags.

```
export default function HomePage() {  
  const [posts, setPosts] = useState([]);  
  
  useEffect(() => { ...  
}, []);  
  
  return (  
    <section className="page">  
      <section className="grid-container">  
        {posts.map(post => (  
          <article>  
            <img src={post.image} alt={post.title} />  
            <h2>{post.title}</h2>  
          </article>  
        ))}  
      </section>  
    </section>  
  );  
}
```

The screenshot shows a web browser window with the title "The React Handbook". The URL in the address bar is "thevalleyofcode.com/react/#8-the-difference-between-jsx-and-html". The page content is titled "8. The difference between JSX and HTML".

JSX kind of looks like HTML, but it's not.

In this section, I want to introduce to you some of the most important things you need to keep in mind when using JSX.

One of the differences might be quite obvious if you looked at the `App` component JSX: there's a strange attribute called `className`.

In HTML we use the `class` attribute. It's probably the most widely used attribute, for various reasons. One of those reasons is CSS. The `class` attribute allows us to style HTML elements easily, and CSS frameworks like Tailwind put this attribute at the center of the CSS user interface design process.

But there's a problem. We are writing this UI code in a JavaScript file, and `class` in the JavaScript programming language is a reserved word. This means we can't use this reserved word as we

```
<main className="page">
  <section className="grid-container">
    ...
  </section>
</main>
```

Function Component

```
Regular function →  
function MyComponent() {  
  const name = "React"  
  return ( ← Return JSX  
    <div>  
      <h1>Hello, {name}</h1>  
    </div>  
  )  
}  
Starts with a capital letter  
Anything inside  
curly braces  
will execute as  
JavaScript  
Use any HTML tag  
to build component
```

Function Component

```
function Greeting() {  
  return (  
    <div>  
      | <h1>Hello, React!</h1>  
      | "Greeting"  
    </div>  
  );  
}
```


Define the component

```
function App() {  
  return (  
    <div>  
      | <Greeting />  
      | <div>  
      |   | <Greeting />  
      |   | </div>  
      | </div>  
  );  
}
```

Use Greeting component
in another component


Components without
a closing tag
REQUIRE a closing
slash

Components, Components, Components

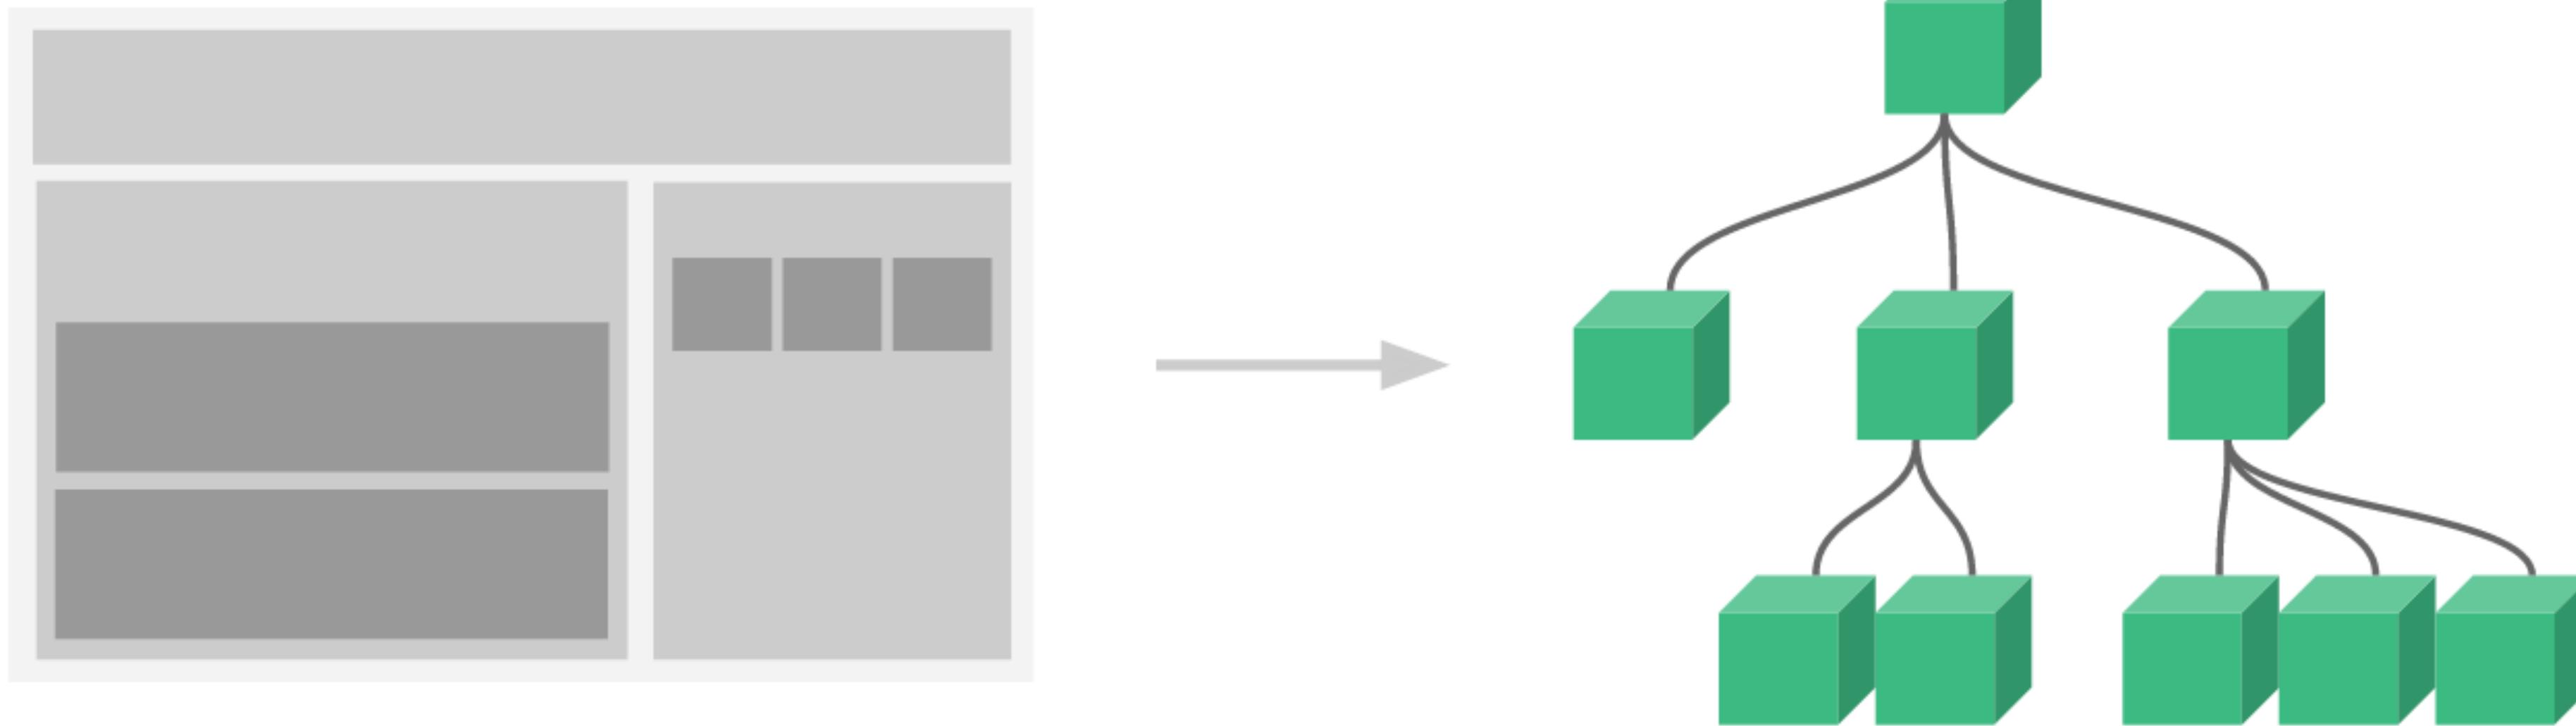


Build Reusable Components

UI can be broken down to small block or modules called components

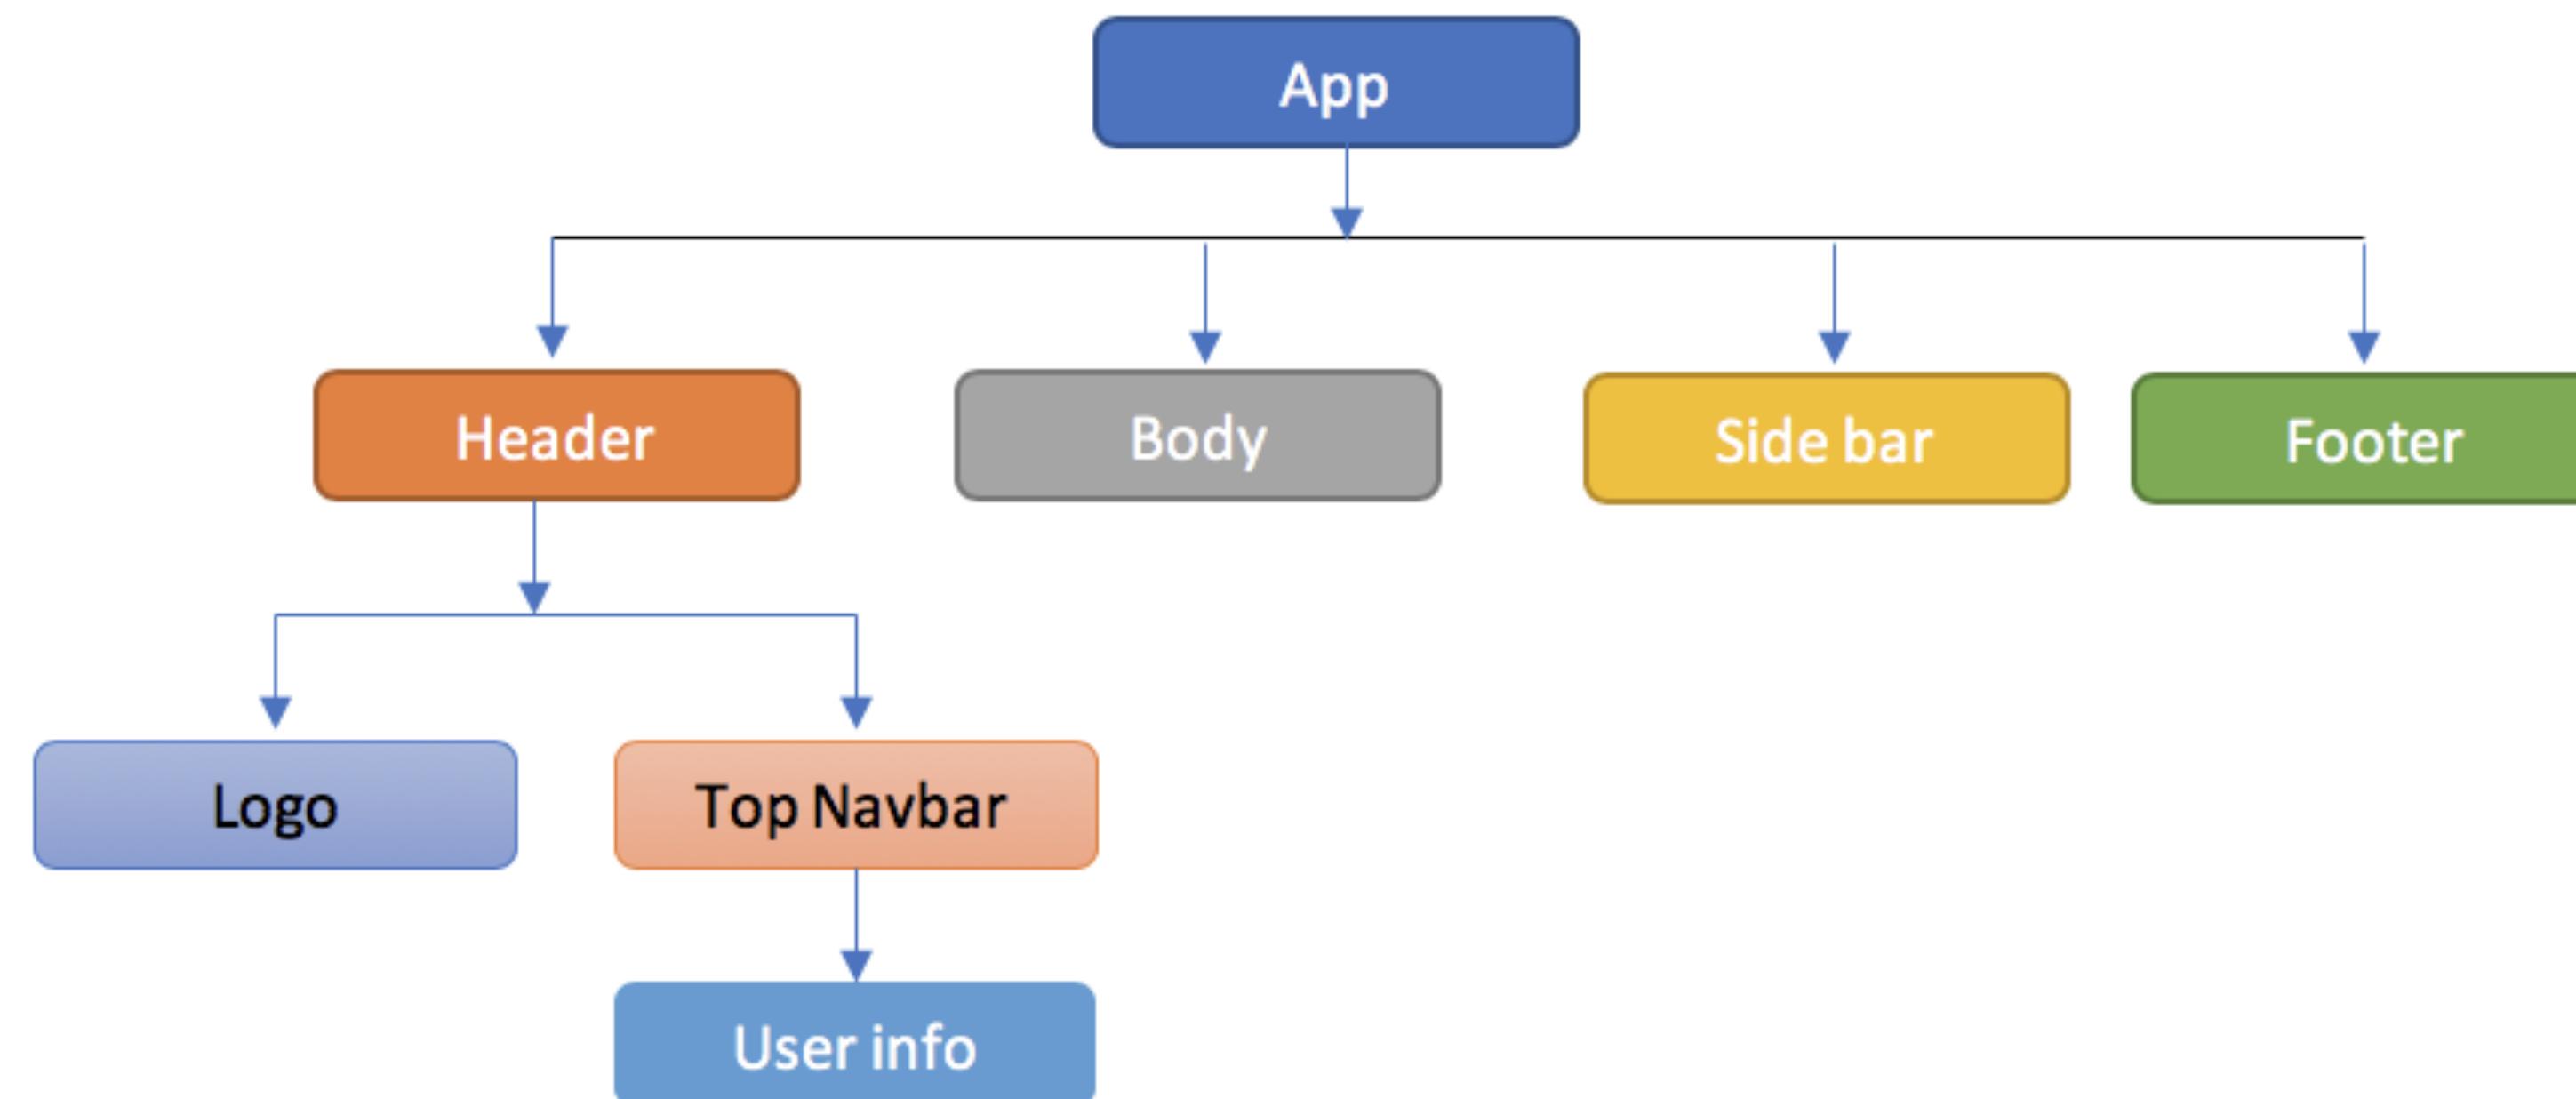


Build Reusable Components


UI can be broken down to small block or modules called components

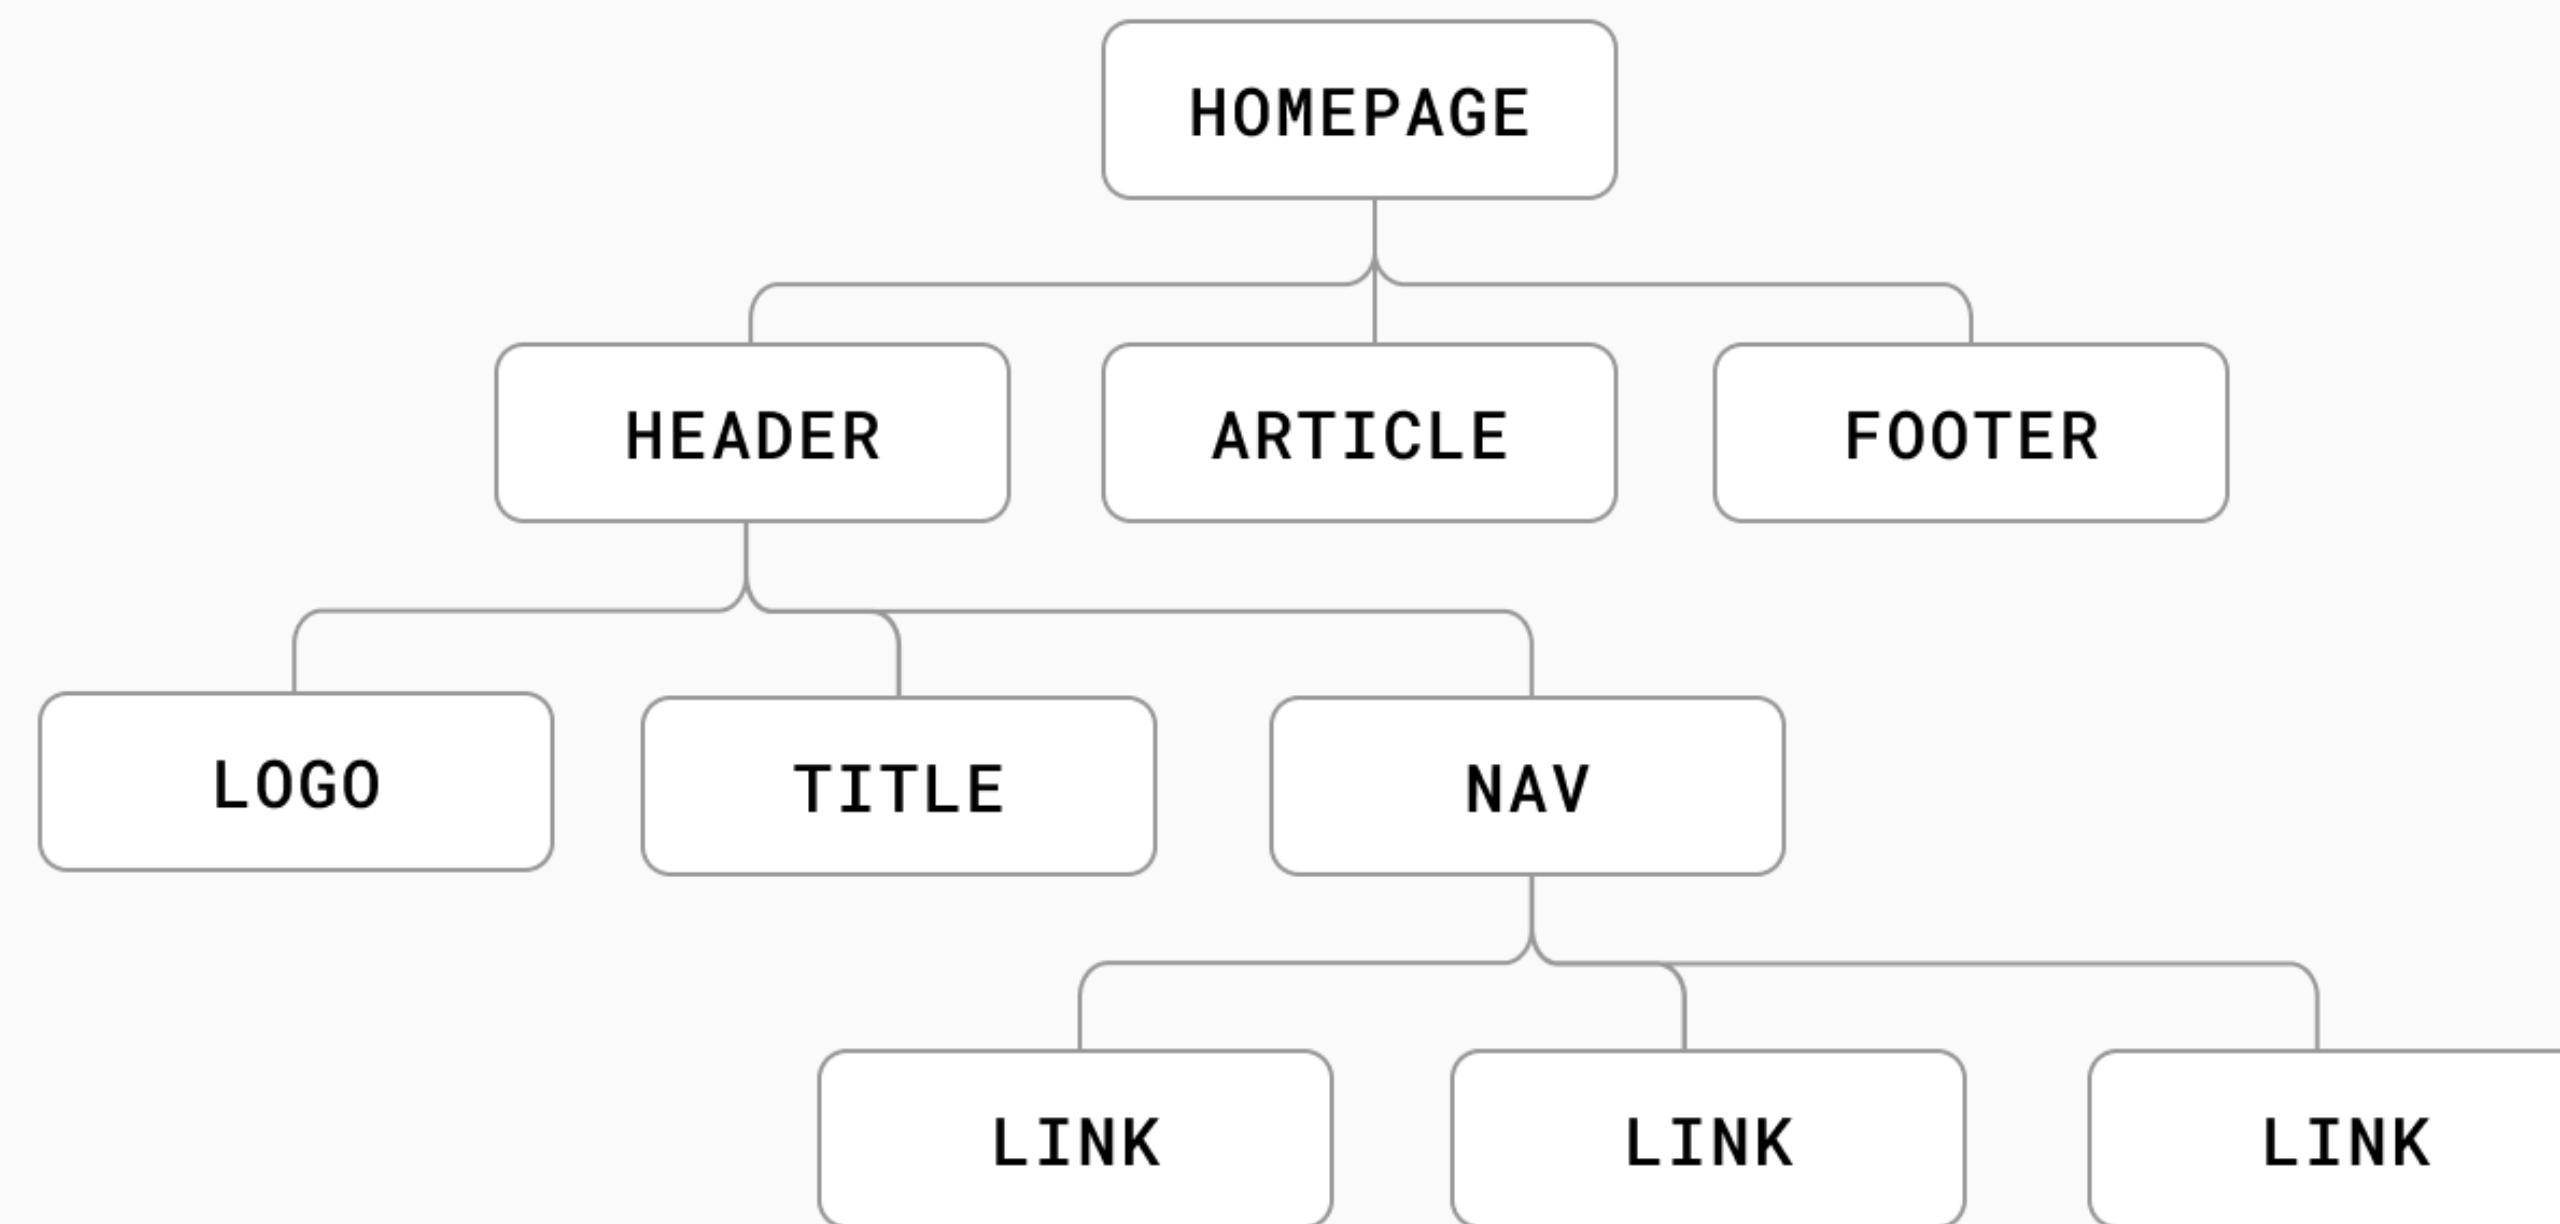

Like “LEGO Bricks”

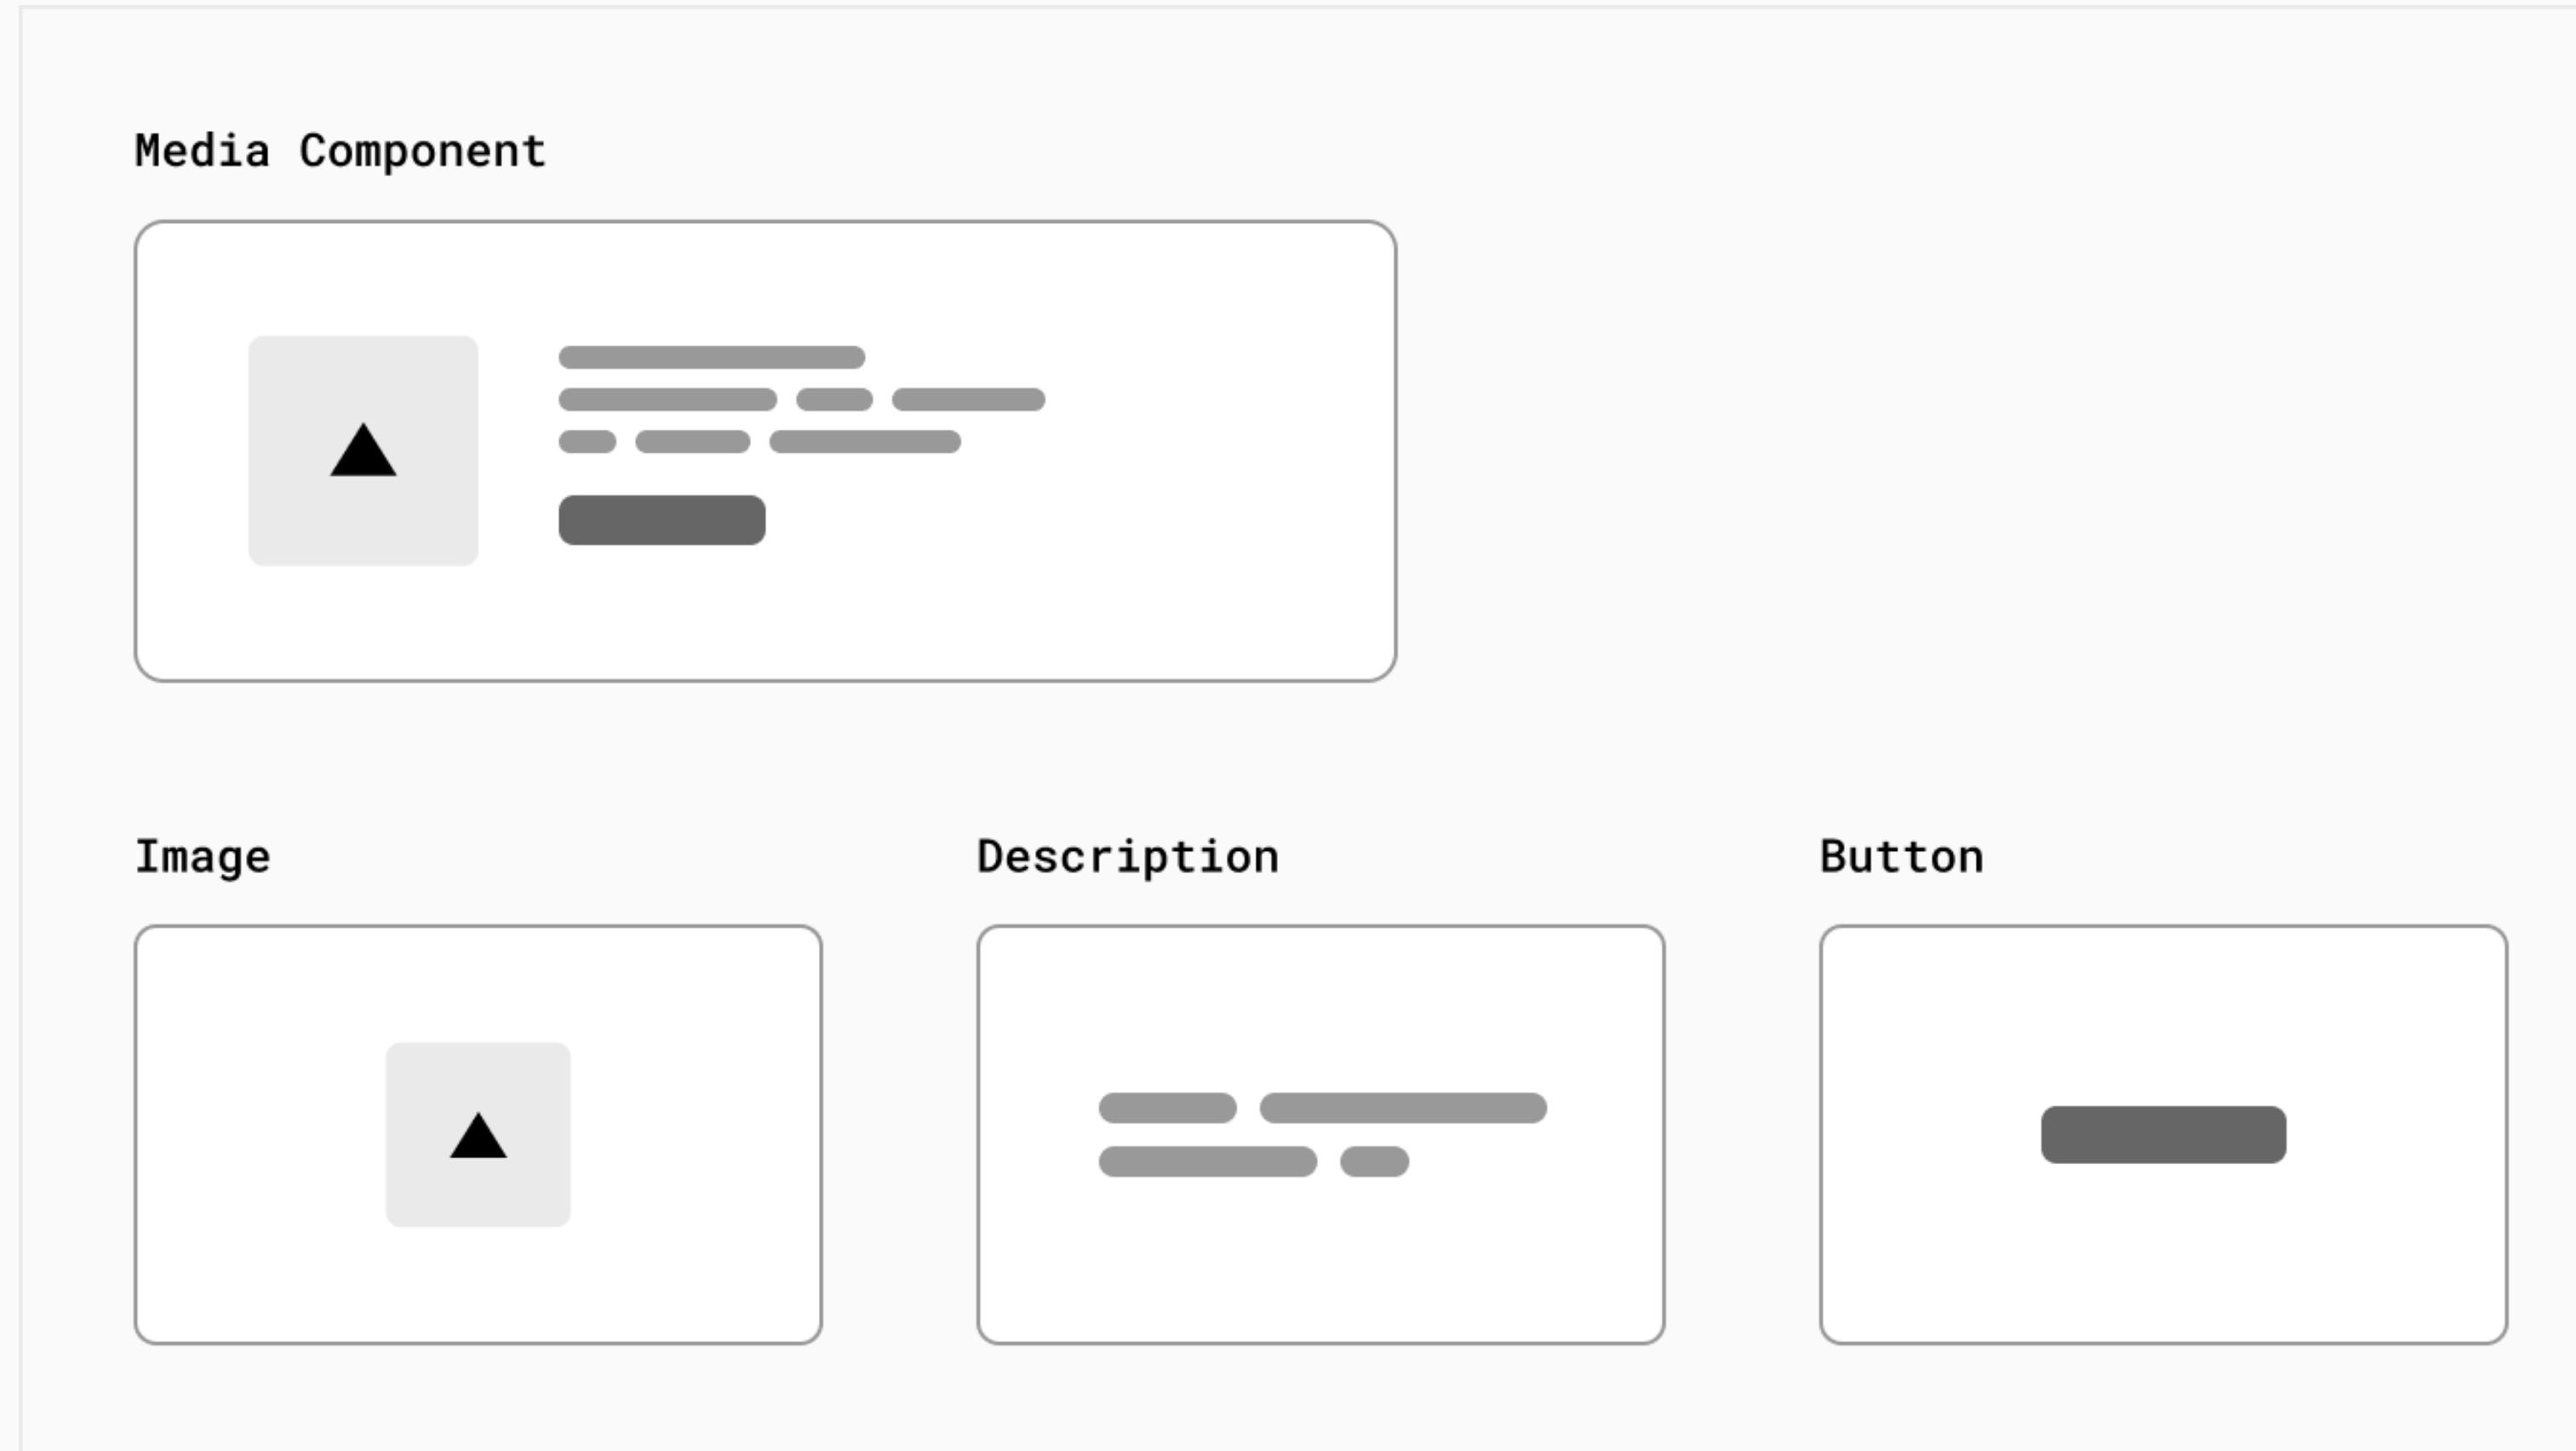

<https://nextjs.org/learn-foundations/from-javascript-to-react/building-ui-with-components>

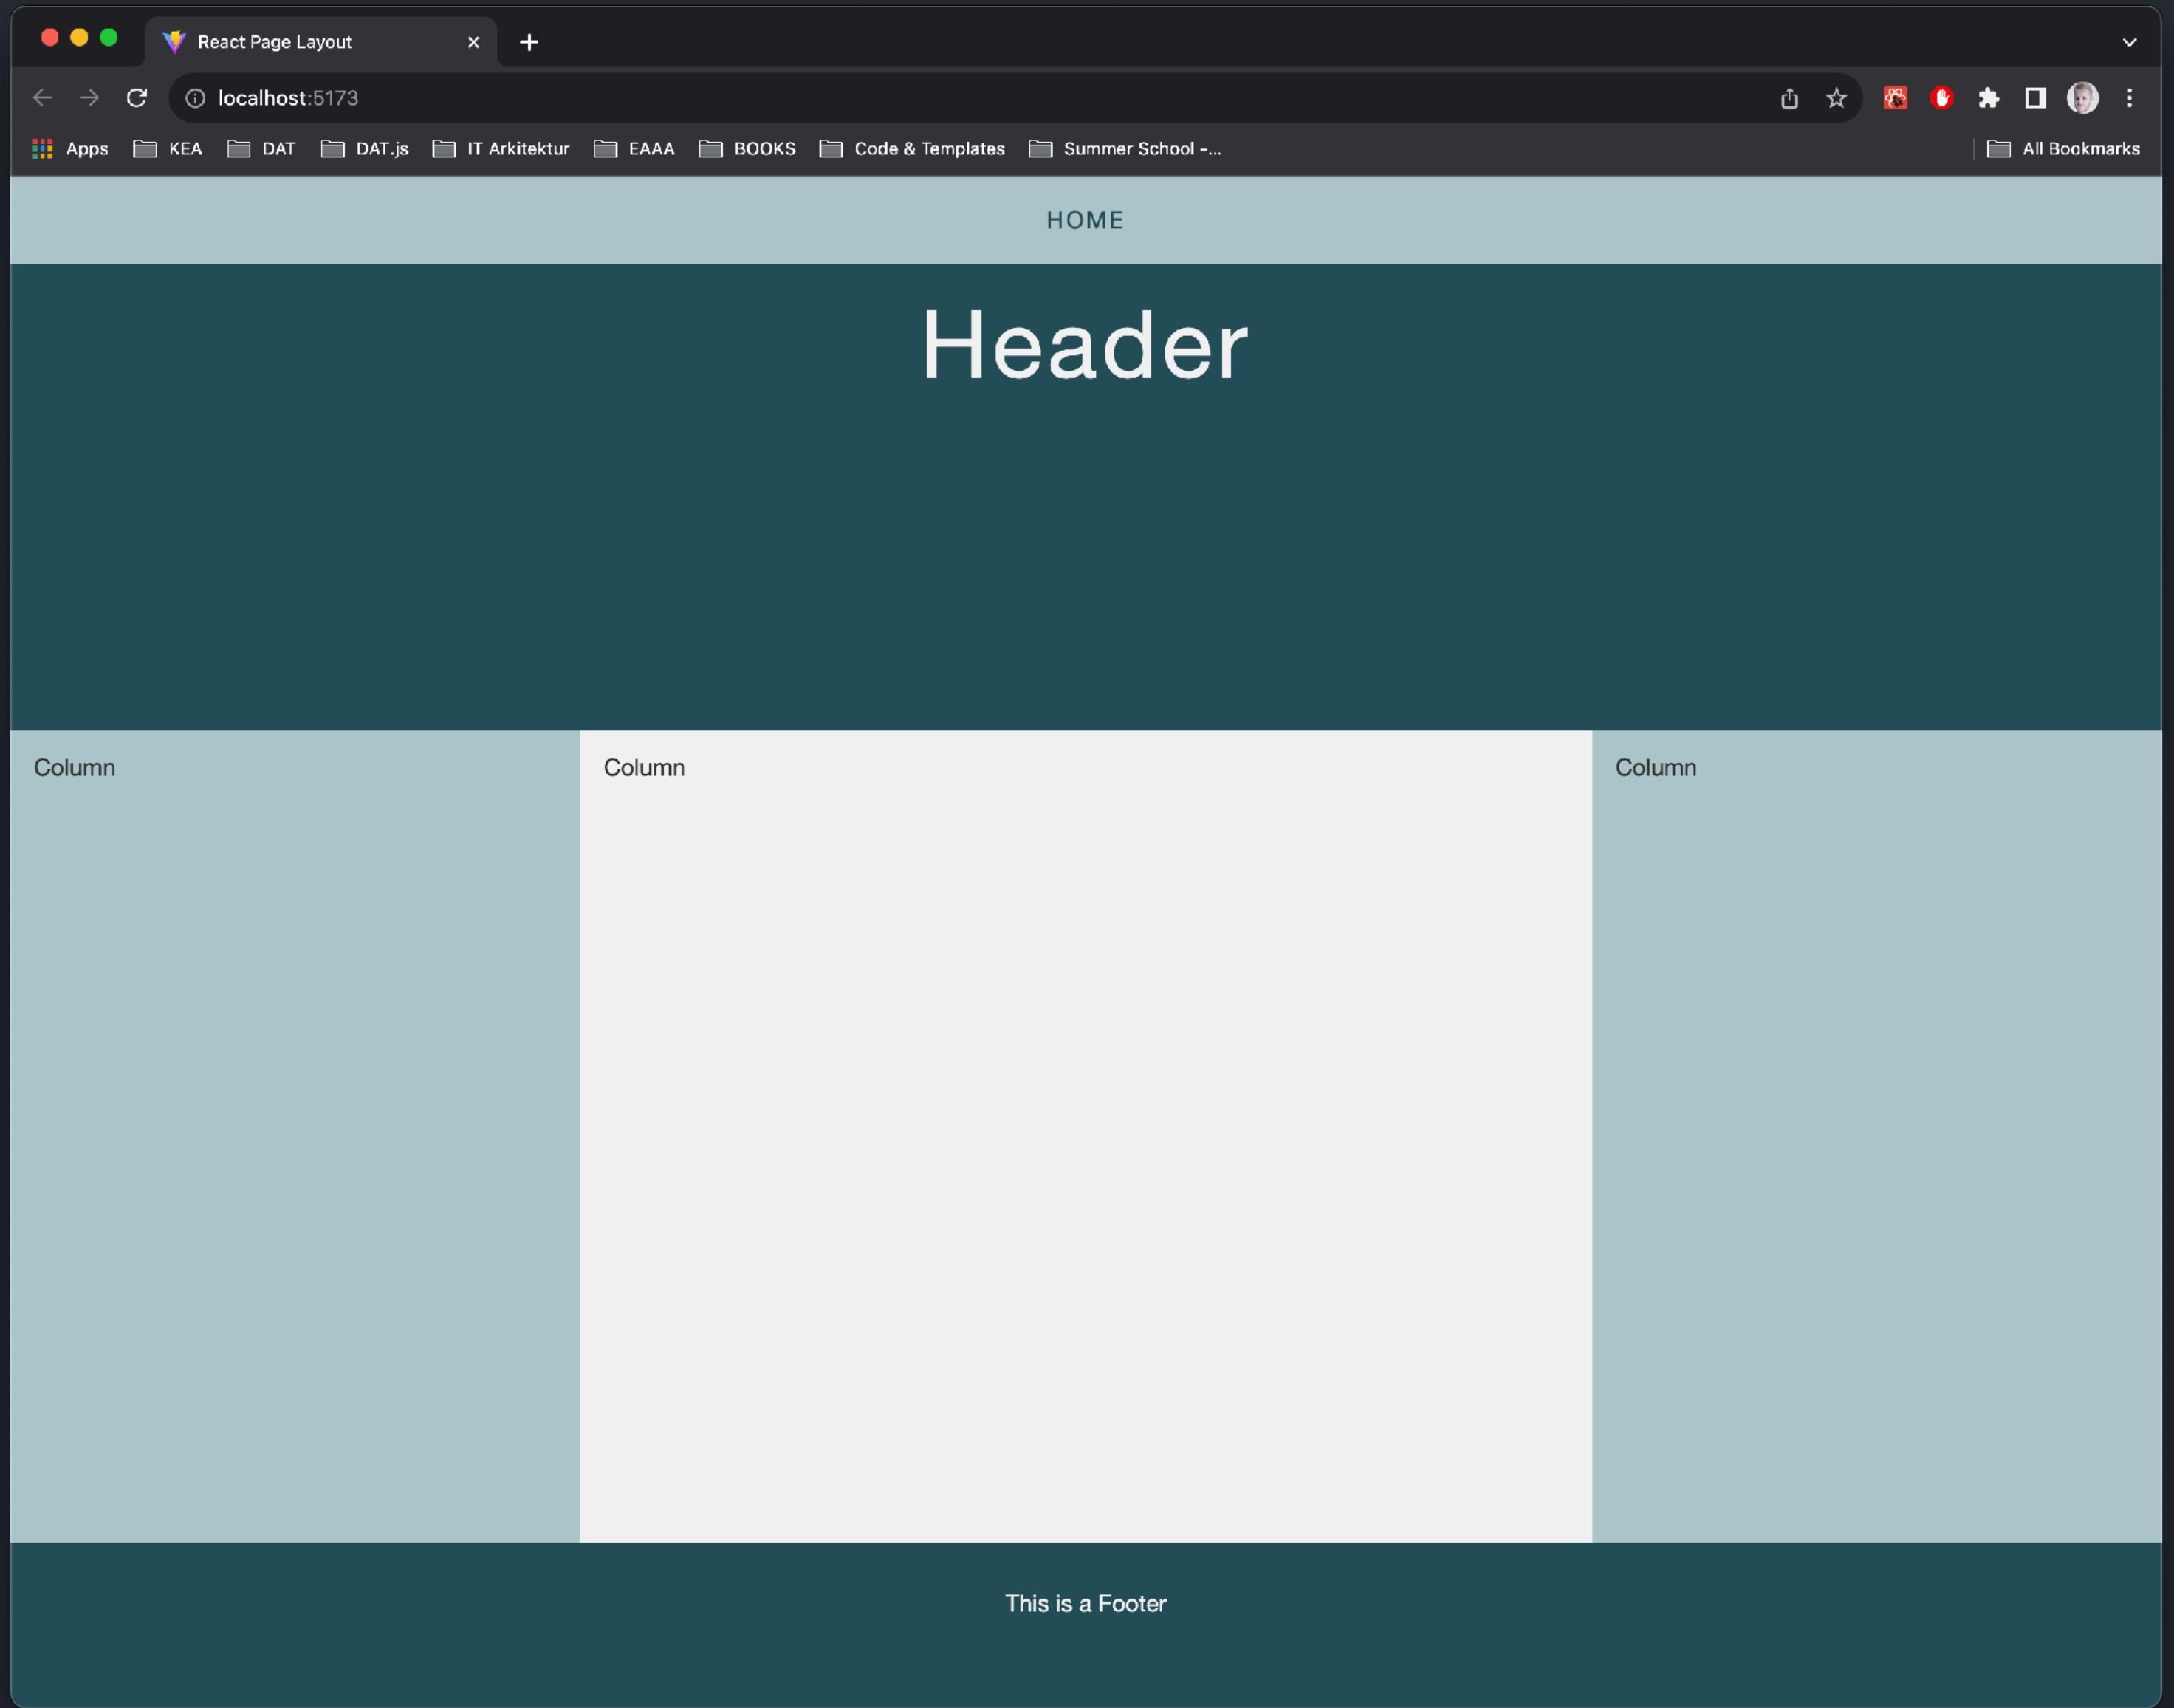

```
function Navigation() {
  return (
    <nav>
      <a href="#">Home</a>
    </nav>
  );
}

function Header() {
  return (
    <header>
      <h1>React Page Template</h1>
    </header>
  );
}

function PageContent() {
  return (
    <section>
      <h2>Here goes some page content</h2>
    </section>
  );
}

function Footer() {
  return (
    <footer>
      <p>This is my Footer</p>
    </footer>
  );
}
```

It's all Components!

The screenshot shows a dark-themed code editor with five tabs open, each containing JSX code for a different component:

- App.jsx**:

```
src > App.jsx <...>
1 import Footer from "./components/Footer";
2 import Header from "./components/Header";
3 import MainContent from "./components/MainContent";
4 import Navigation from "./components/Navigation";
5
6 function App() {
7   return (
8     <main className="page-layout">
9       <Navigation />
10      <Header />
11      <MainContent />
12      <Footer />
13    </main>
14  );
15}
16
17 export default App;
18
```
- Navigation.jsx**:

```
src > components > Navigation.jsx <...>
1 export default function Navigation() {
2   return (
3     <nav>
4       <a href="#">Home</a>
5     </nav>
6   );
7 }
8
```
- Header.jsx**:

```
src > components > Header.jsx <...>
1 export default function Header() {
2   return (
3     <header>
4       <h1>Header</h1>
5     </header>
6   );
7 }
8
```
- MainContent.jsx**:

```
src > components > MainContent.jsx <...>
1 export default function MainContent() {
2   return (
3     <>
4       <section className="left">Column</section>
5       <section className="middle">Column</section>
6       <section className="right">Column</section>
7     </>
8   );
9 }
```
- Footer.jsx**:

```
src > components > Footer.jsx <...>
1 export default function Footer() {
2   return (
3     <footer>
4       <p>This is a Footer</p>
5     </footer>
6   );
7 }
8
```

The status bar at the bottom indicates the code is 18 lines long, 4 spaces wide, and uses LF line endings. It also shows tabs for JavaScript JSX, Go Live, and Prettier.

React Components

https://www.w3schools.com/react/react_components.asp

Tutorials ▾ References ▾ Exercises ▾ Videos

Pro NEW Get Certified Website Login

HTML CSS JAVASCRIPT SQL PYTHON PHP BOOTSTRAP HOW TO W3.CSS JAVA JQUERY C C++ C# R React

React Tutorial

- React Home
- React Intro
- React Get Started
- React ES6
- React Render HTML
- React JSX
- React Components**
- React Class
- React Props
- React Events
- React Conditionals
- React Lists
- React Forms
- React Router
- React Memo
- React CSS Styling
- React Sass Styling

React Hooks

- What is a Hook?
- useState
- useEffect
- useContext
- useRef
- useReducer
- useCallback
- useMemo
- Custom Hooks

React Exercises

React Components

◀ Previous Next ▶

Components are like functions that return HTML elements.

React Components

Components are independent and reusable bits of code. They serve the same purpose as JavaScript functions, but work in isolation and return HTML.

Components come in two types, Class components and Function components, in this tutorial we will concentrate on Function components.

In older React code bases, you may find Class components primarily used. It is now suggested to use Function components along with Hooks, which were added in React 16.8. There is an optional section on Class components for your reference.

Create Your First Component

When creating a React component, the component's name *MUST* start with an upper case letter.

Class Component

We just launched
W3Schools videos

Explore now

COLOR PICKER

f i n d

Get certified
by completing
a React.js
course today!

Components?

A screenshot of a web browser displaying a React application. The page has a dark header with tabs for 'POSTS', 'CREATE', and 'PROFILE'. Below the header is a grid of six cards, each representing a post. Each card contains a user profile picture, the user's name, their title, a preview image, and a short snippet of text.

Post	User Name	Title	Image Preview	Text Snippet
1	Maria Louise Bendixen	Senior Lecturer		dolor sint quo a velit explicabo quia namen
2	Jes Arbov	Lecturer		dolorem eum magni eos aperiam quia
3	Birgitte Kirk Iversen	Senior Lecturer		magnam facilis autem dolore placeat quibusdam ea quo vitae magni quis enim qui quis quo nemo aut saepe quidem repellat excepturi ut quia sunt ut sequi eos ea sed quas
4	Kim Elkjær Marcher-Jepsen	Senior Lecturer		
5	Dan Okkels Brendstrup	Lecturer		
6	Morten Algy Bonderup	Senior Lecturer		

react-cdn-firebase-post-app-auth



A screenshot of a web browser displaying a Single Page Application (SPA). The page has a dark header with tabs for 'ALL USERS', 'Order by:', 'Choose here', 'Filter by:', 'All', and a search bar. Below the header is a grid of user profiles, each with a photo, name, email, and enrollment status. At the bottom of the grid are buttons for 'UPDATE' and 'DELETE'.

User	Email	Enrollment	Actions
Diana Riis Myjak Andersen	eaadimy@students.eaaa.dk	StudentEnrollment	UPDATE DELETE
German Arias Rodriguez	eaagar@students.eaaa.dk	StudentEnrollment	UPDATE DELETE
Haya Barakat	eaahbar@students.eaaa.dk	StudentEnrollment	UPDATE DELETE

Template: spa-canvas-users-template

Solution: spa-canvas-users


And?

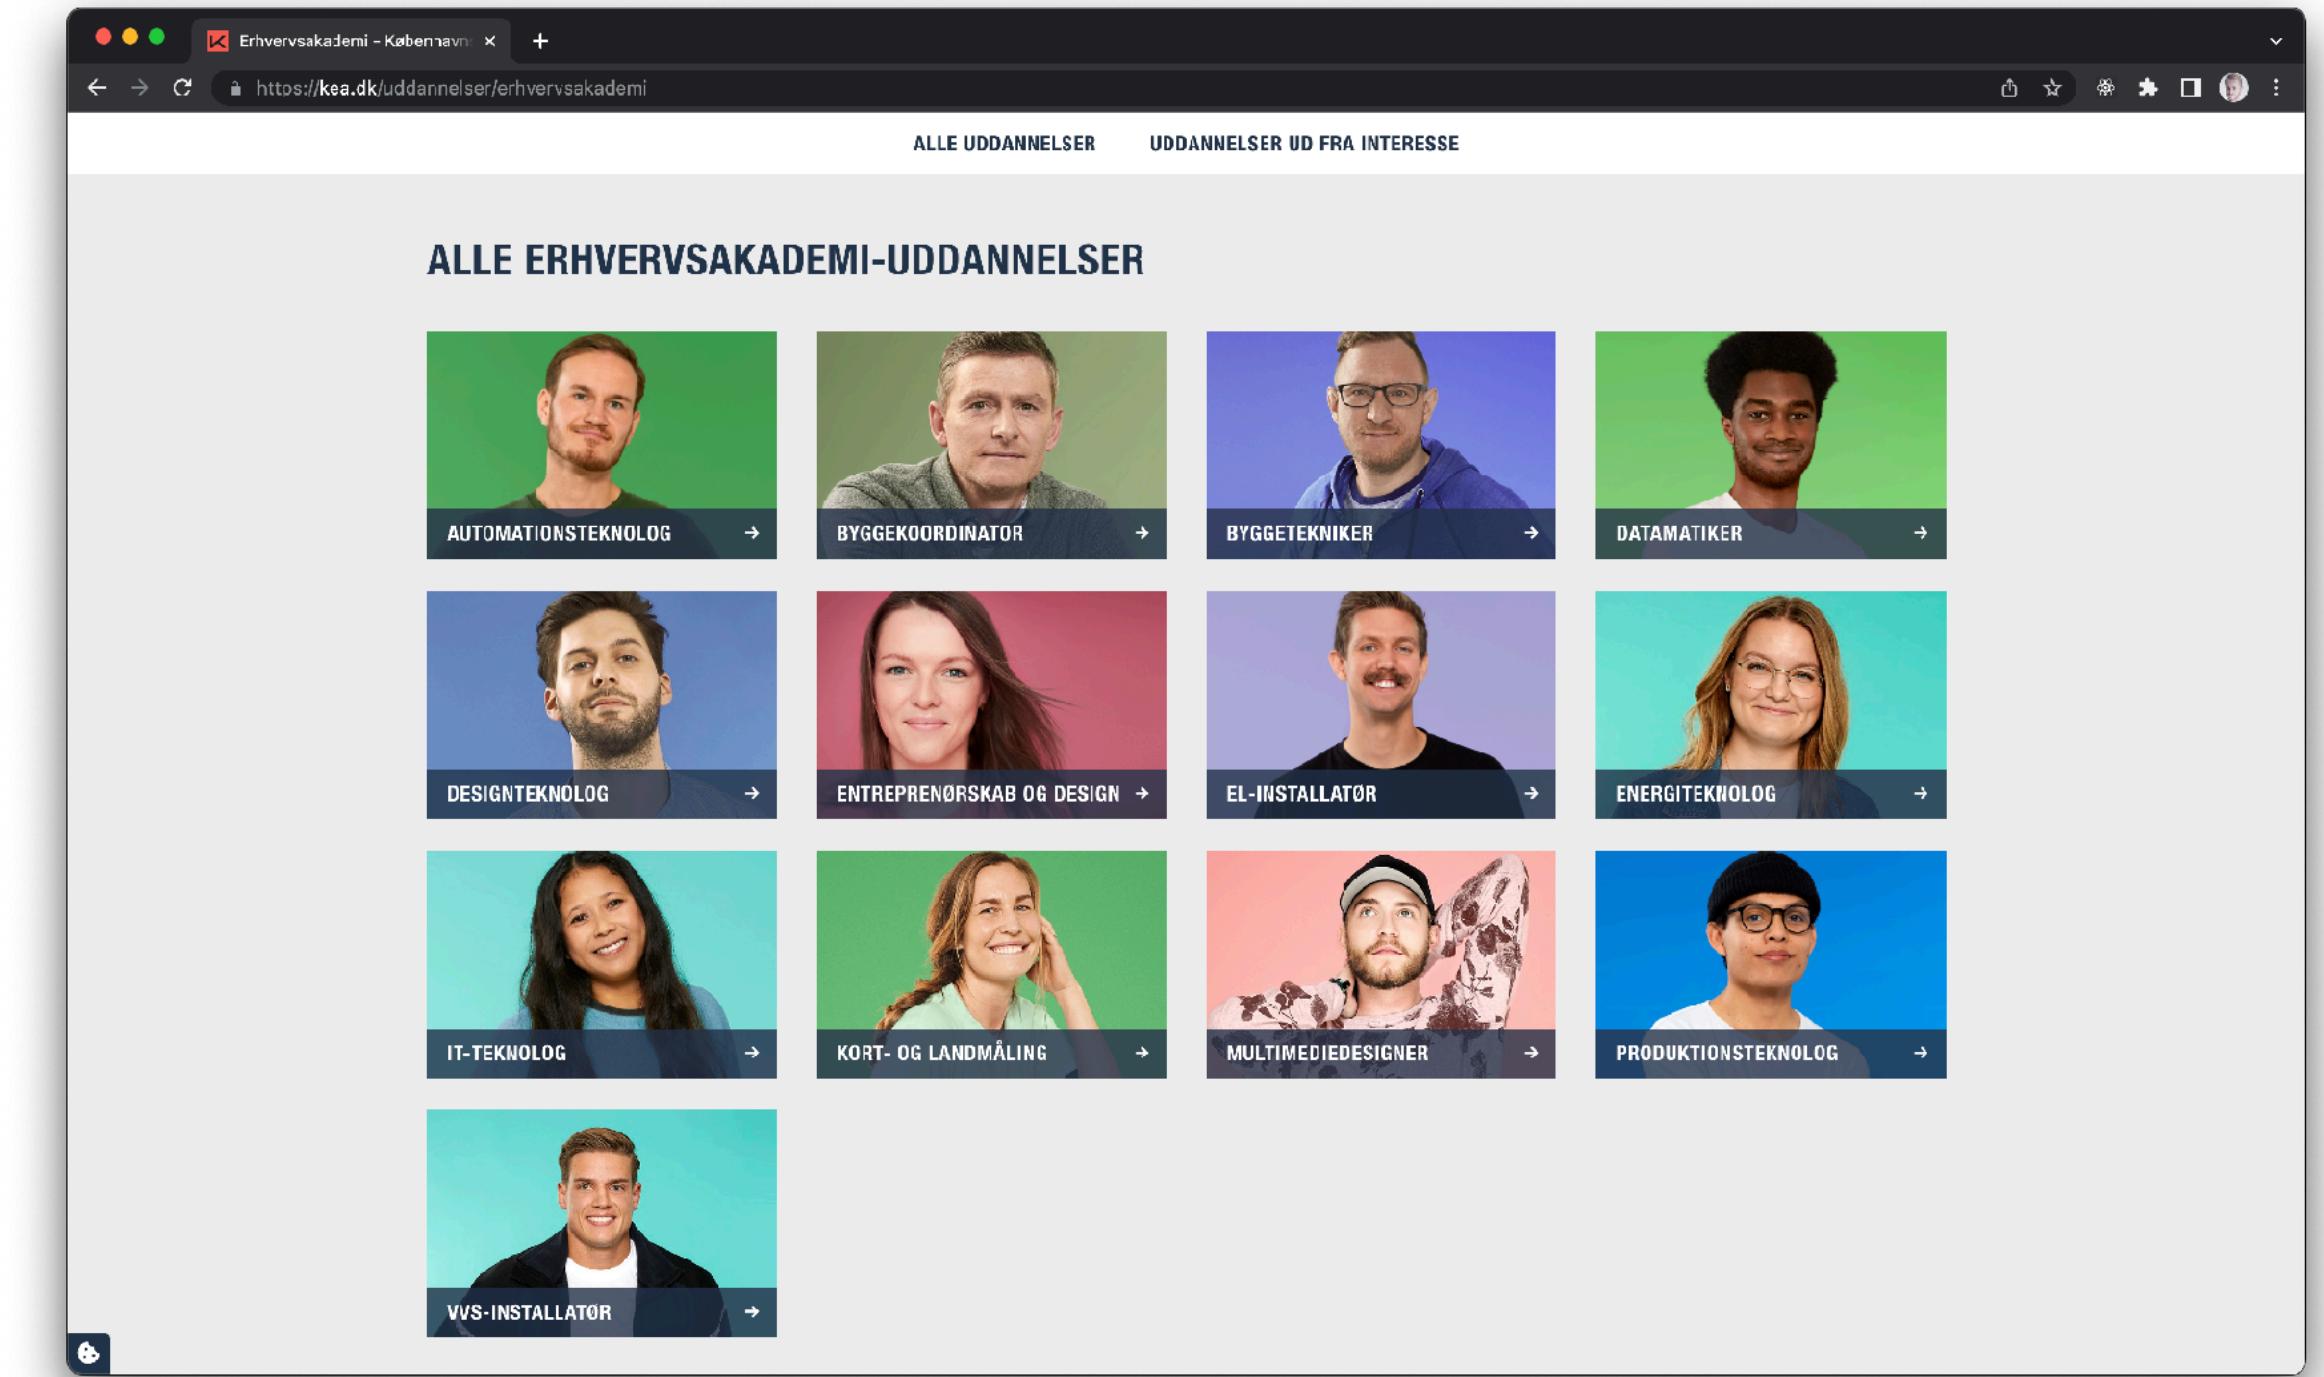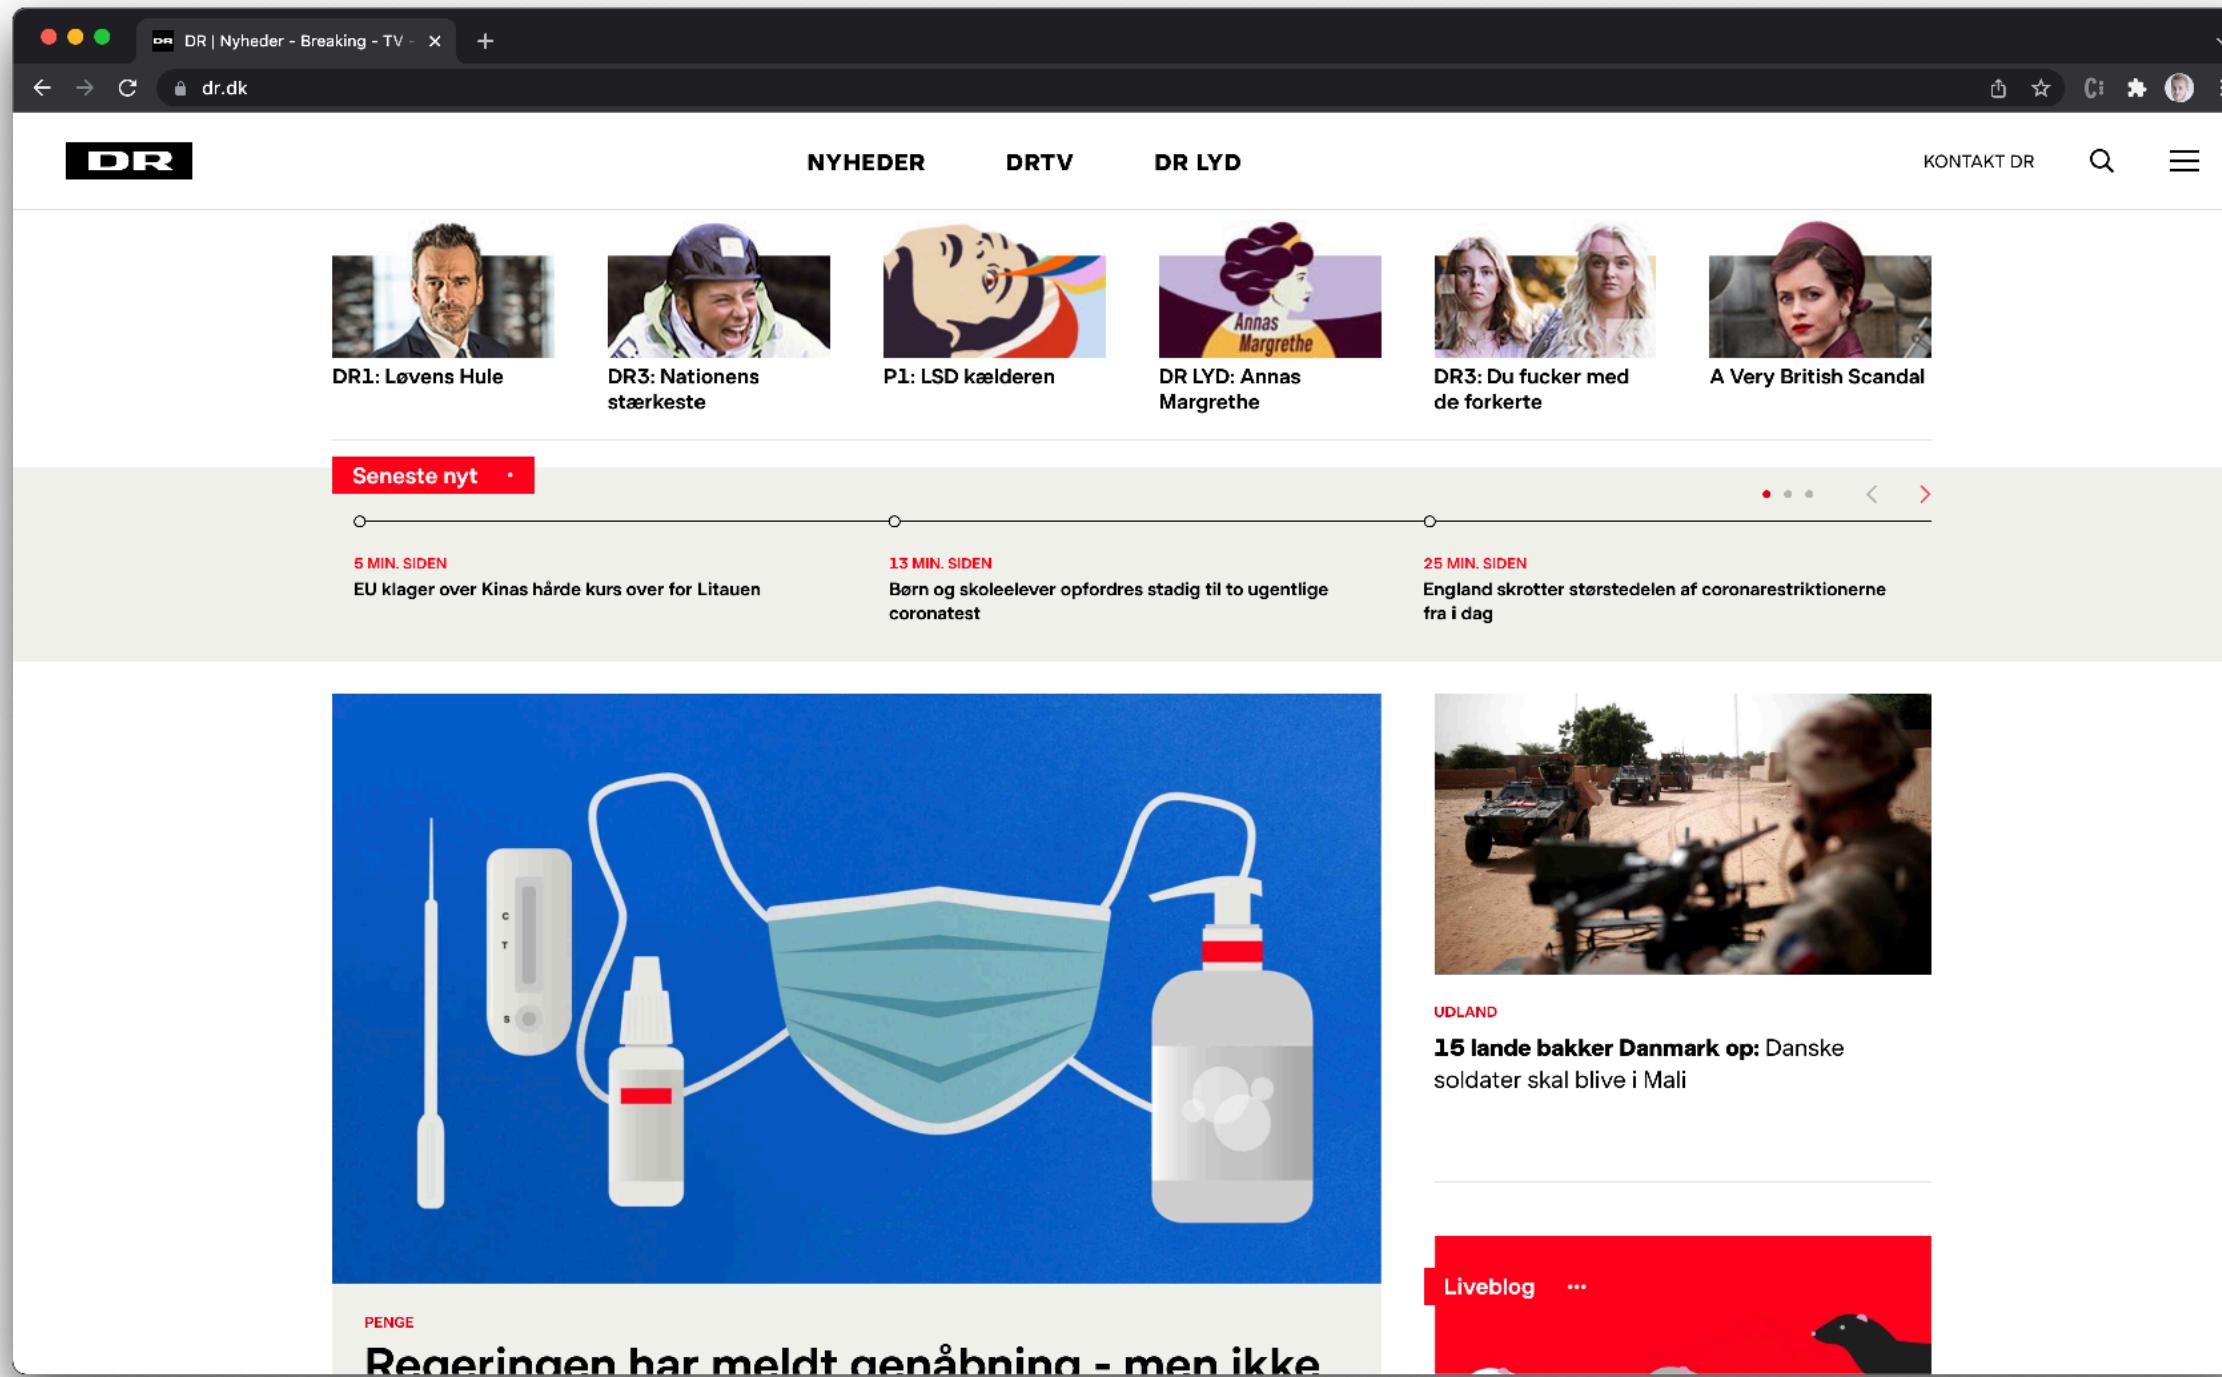

... but we thought it was all objects and array?

Component Page Layout

1. Create a new react project
2. Implement a page layout and create the following components: Navigation, Header, MainContent & Footer
3. Add some placeholder content in every component like headlines and/or text.
MainContent should consist of 3 columns (use the CSS classes left, middle & right).
4. Make sure to render all components in the App component.
5. Style your page layout using a grid and/or flexbox. Get inspired by [react-cdn-page \(code\)](#)

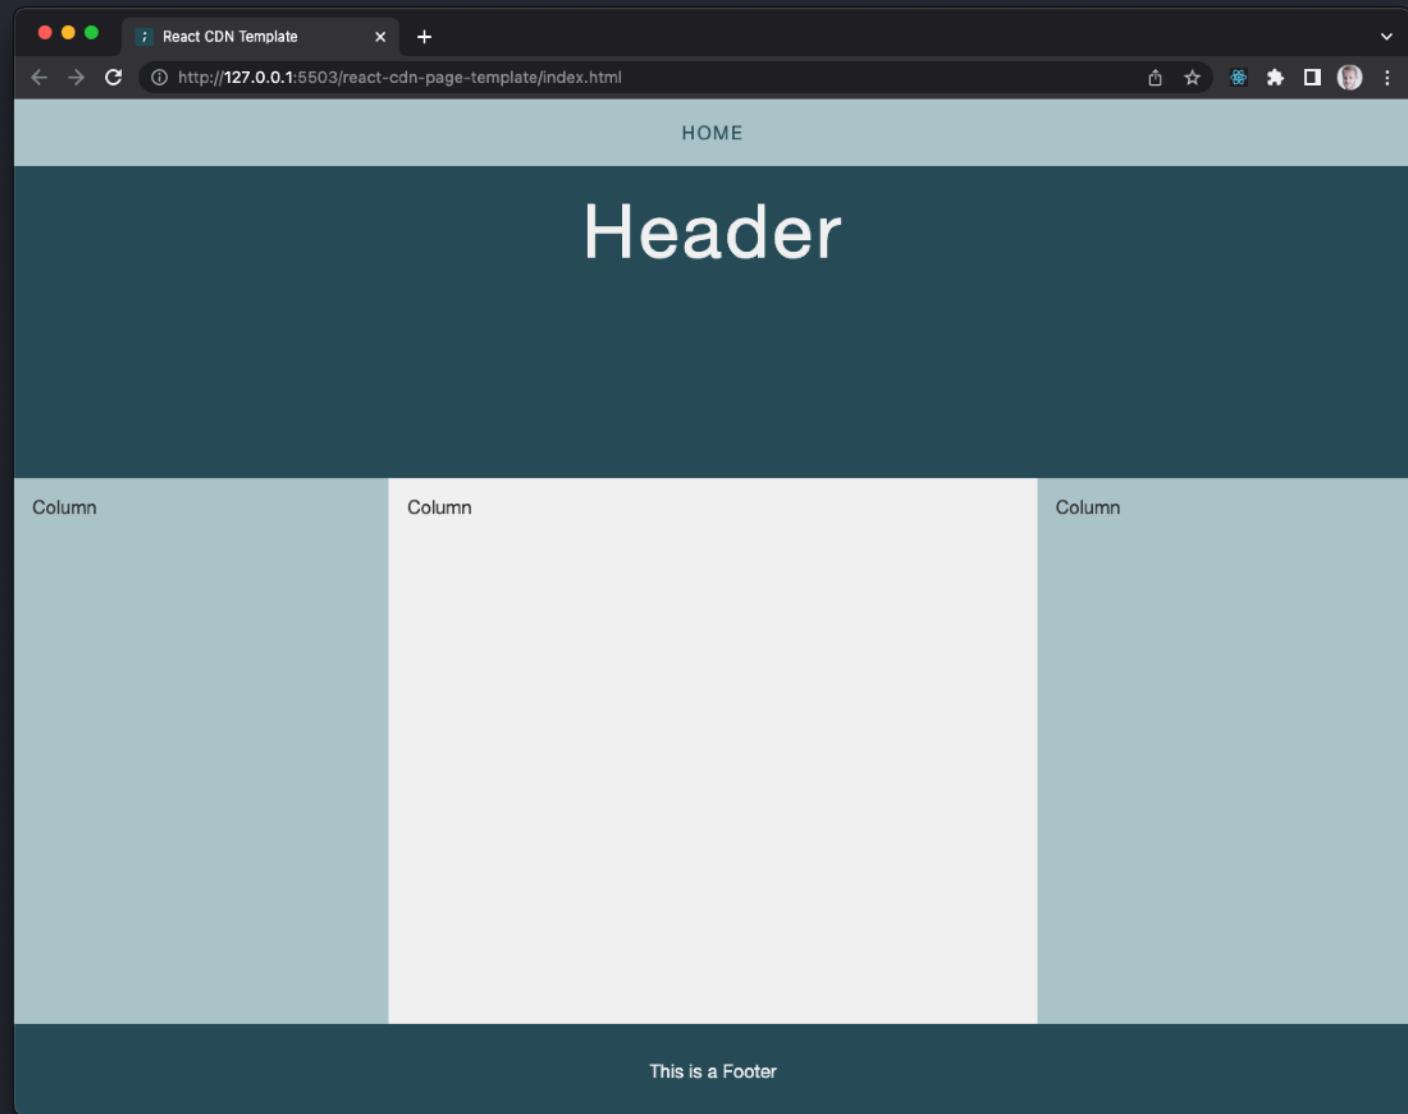


```
export default function App() {
  return (
    <main className="page-layout">
      <Navigation />
      <Header />
      <MainContent />
      <Footer />
    </main>
  );
}
```

Props

... arguments passed into a React Component. Props are passed to components via HTML attributes.

```
function Greeting({ name }) {  
  return <h1>Hello, {name}</h1>;  
}  
  
function App() {  
  return <Greeting name="world" />;  
}
```

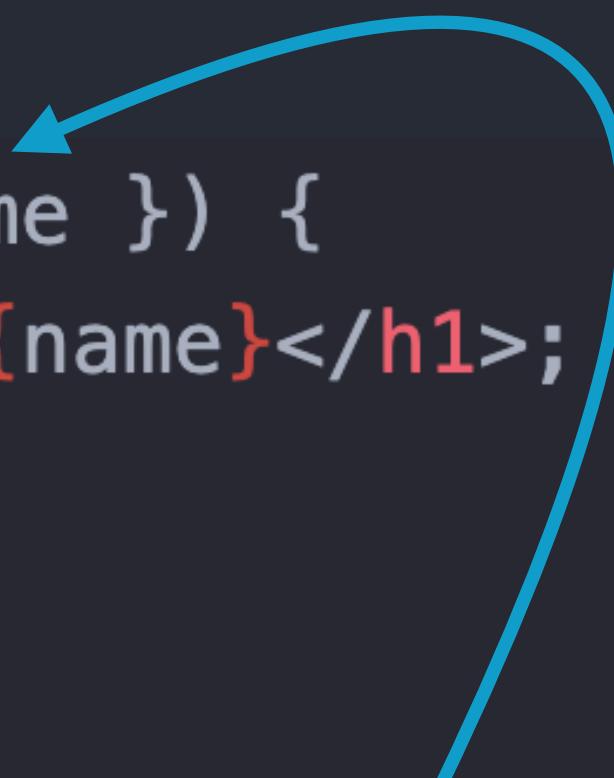

Function Component with Props

```
function Greeting(props) {  
  return (  
    <div>  
      | <h1>Hello, {props.name}!</h1>  
    </div>  
  );  
}
```

props is first argument to function components

Access props inside of curly braces to show value

```
function App() {  
  return (  
    <div>  
      | <Greeting name="React" />  
      <div>  
        | <Greeting name="Chris" />  
      </div>  
    </div>  
  );  
}
```


Set a prop on a child component by passing an attribute

Different instances of component can have different prop values

Add Props: Your First React App

1. Use your implementation of Your First React App.
2. Delete the `const name` variable Person component.
3. Add a prop to your Person component called `name`. The `name` prop is an argument pass to the function (component)t.
4. Make sure the `name` prop is rendered in the JSX of your Person component.
5. Locate your Person components in your App component and add a `name` attribute. Pass in a name to every Person component.
6. Test your solution and try to change the `name` attribute value.
7. Consider why props are useful in addition to creating dynamic web apps and reusable code.
8. Implement other props like mail, phone, etc., and make sure the props are rendered inside of your Person component.


```
function Greeting({ name }) {  
  return <h1>Hello, {name}</h1>;  
}  
  
function App() {  
  return <Greeting name="world" />;  
}
```

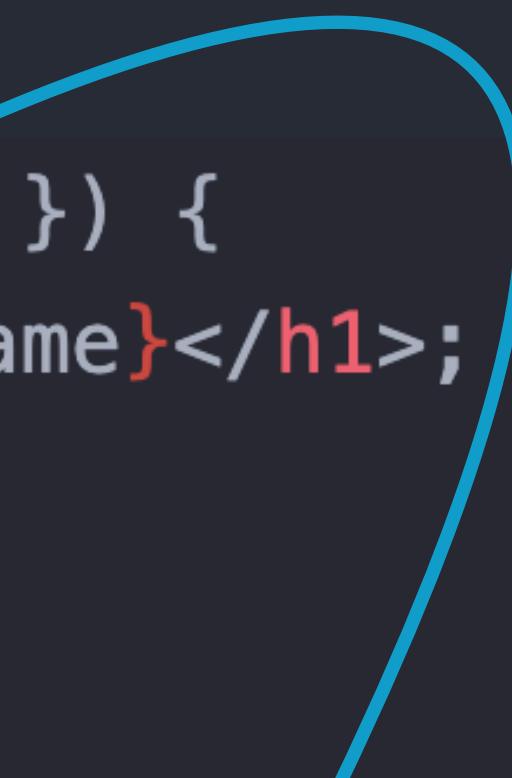

Add Props: Page Layout

1. Use your implemented Page Layout.
2. Add a prop to your Header component called title. Make sure the component (function) takes in an argument. The title prop must be rendered in the JSX inside the h1.
3. Locate the Header component in App and add the attribute title and pass in a title (“My Title”, “Your Name” etc.).
4. Test your solution and try to change the title attribute value.
5. Implement and try out props for some of the other components in your Page Layout.


```
function Greeting({ name }) {  
  return <h1>Hello, {name}</h1>;  
}  
  
function App() {  
  return <Greeting name="world" />;  
}
```

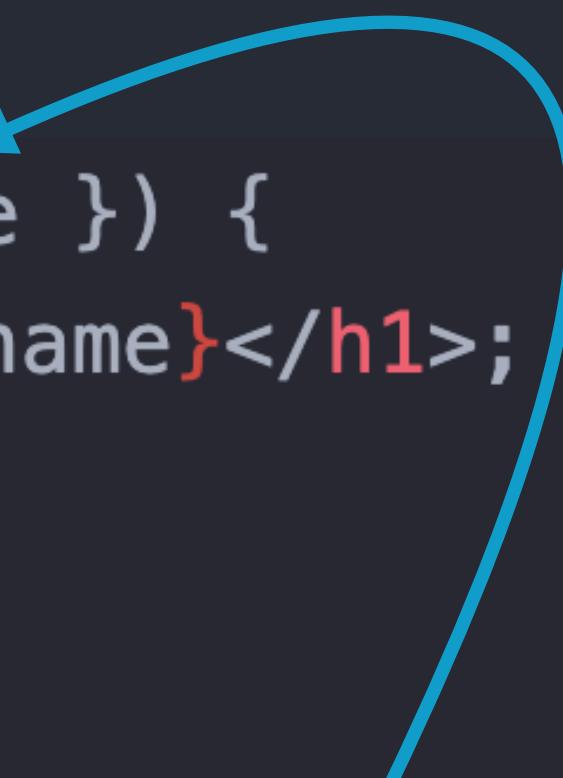


React Hooks

useState & useEffect

Edit src/App.js and save to reload
Learn React

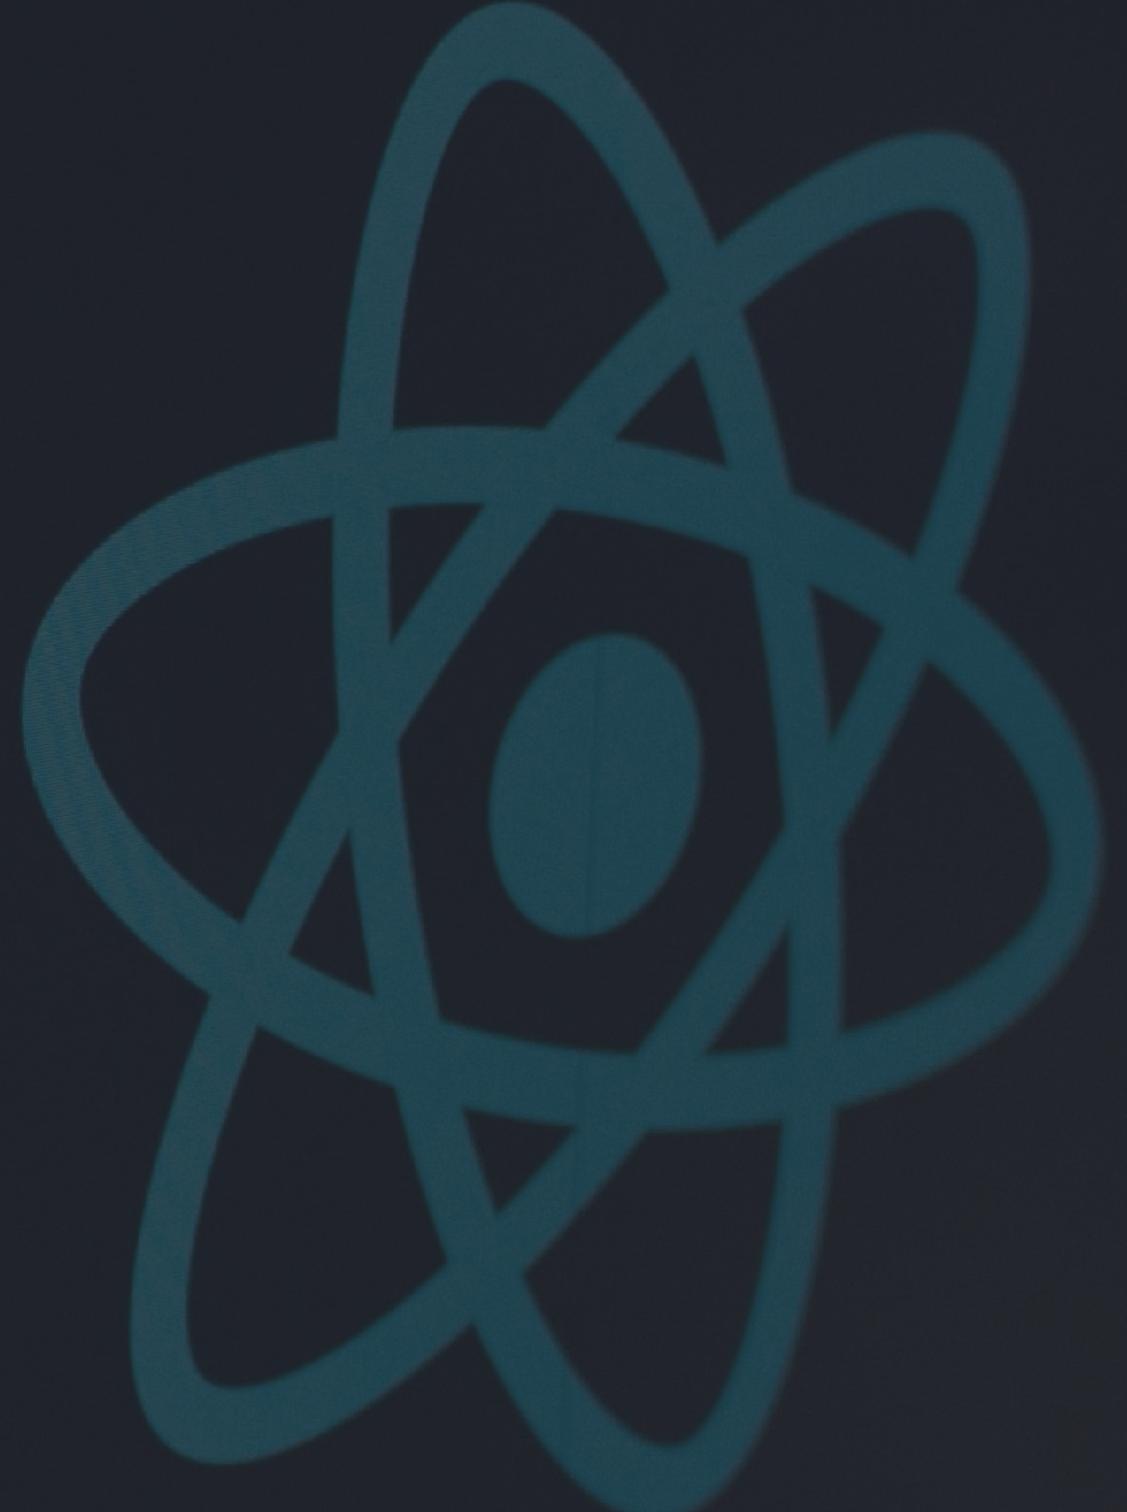

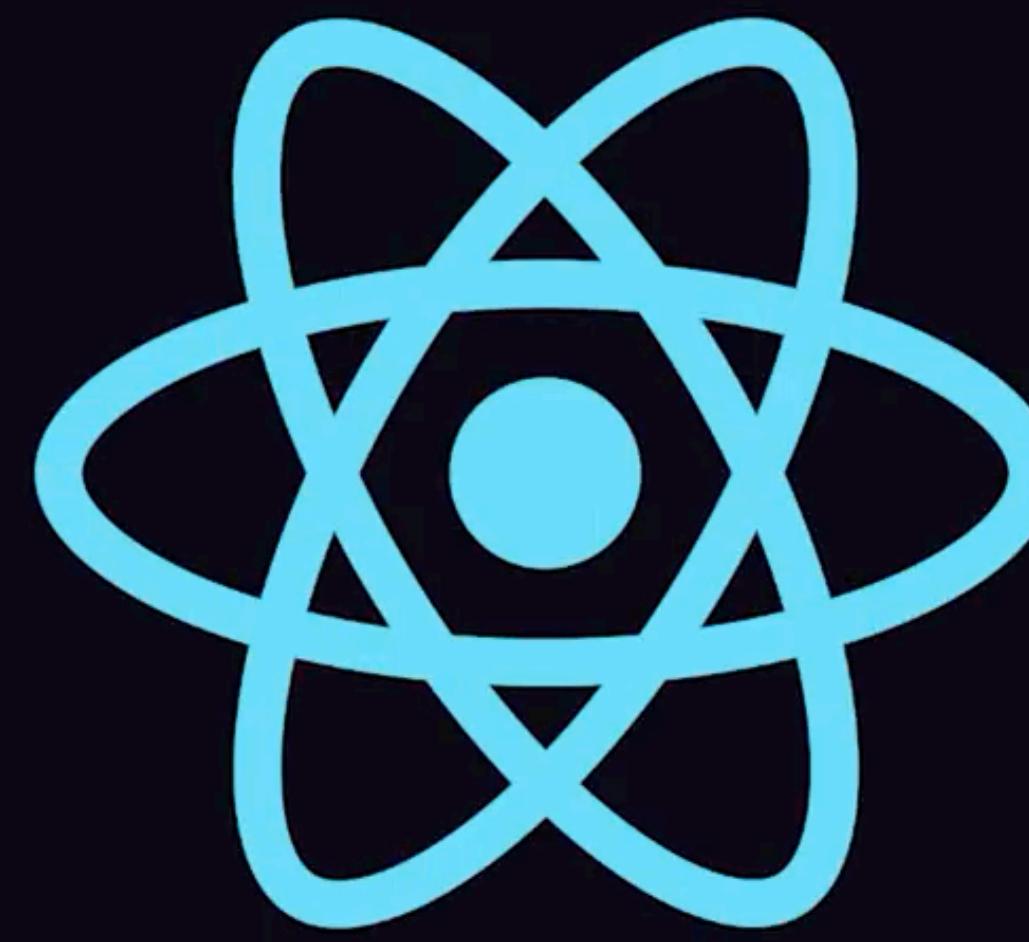

<https://www.youtube.com/watch?v=TNhalSOUy6Q>

React Hooks

The screenshot shows a web browser window with the title "React Hooks" at the top. The URL in the address bar is https://www.w3schools.com/react/react_hooks.asp. The page content is as follows:

- React Tutorial**
 - React Home
 - React Intro
 - React Get Started
 - React ES6
 - React Render HTML
 - React JSX
 - React Components
 - React Class
 - React Props
 - React Events
 - React Conditionals
 - React Lists
 - React Forms
 - React Router
 - React Memo
 - React CSS Styling
 - React Sass Styling
- React Hooks**
 - What is a Hook?** (highlighted in green)
 - useState
 - useEffect
 - useContext
 - useRef
 - useReducer

The main content area contains the following text:

React Hooks

Previous **Next**

Hooks were added to React in version 16.8.

Hooks allow function components to have access to state and other React features. Because of this, class components are generally no longer needed.

Although Hooks generally replace class components, there are no plans to remove classes from React.

What is a Hook?

Hooks allow us to "hook" into React features such as state and lifecycle methods.

Example:

Here is an example of a Hook. Don't worry if it doesn't make sense. We will go into more detail in the next section.

On the right side of the page, there are several sidebar elements:

- We just launched W3Schools videos
- Explore now (with a thumbnail image of a video player)
- COLOR PICKER (with a hexagonal color picker icon)
- Social sharing icons: Facebook, Instagram, LinkedIn, and YouTube
- Get certified by completing a course today!

[w3schools.com/react/react_hooks.asp](https://www.w3schools.com/react/react_hooks.asp)

useState()

<https://www.youtube.com/watch?v=TNhalSOUy6Q>

useState

... a hook that allows us to track states in a function component.

The purpose is to handle reactive data. When data in a state change, React reacts and re-renders the UI.

useState(...)

... a hook that allows us to track states in a function component.

The purpose is to handle reactive data. When data in a state change, React reacts and re-renders the UI.

```
import React, { useState } from "react";  
  
function Greeting(props) {  
  const [count, setCount] = useState(0)  
  const updateCount = () => {  
    setCount(count + 1)  
  }  
  
  return (  
    <div>  
      <h1>Hello, {props.name}!</h1>  
      <p>You've clicked {count} times</p>  
      <button onClick={updateCount}>  
        Click me  
      </button>  
    </div>  
  );  
}
```

Import useState from React

Call useState and pass in a default value

useState returns the current value and an update function

Display state in curly braces

Destructuring

The screenshot shows a web browser window with a dark theme, displaying a Notion page titled "From Vanilla JavaScript to React". The page content is organized into sections:

- 1.7. Destructuring**
 - What:** Extract what we need from an existing array or object.
 - Why:** Makes it easy to extract only what we need from an existing array or object.
- Objects**

```
const teacher = {
  name: "Morten",
  email: "moab@eaaa.dk"
};

//choose name and email
const { name, email } = teacher;
//name: "Morten"
//email: "moab@eaaa.dk"
```
- Arrays**

```
const teachers = ["Rasmus", "Morten", "Dan"];

//choose two names
const [mrFrontend, mrWebComponents] = teachers;
//mrFrontend: "Rasmus"
//mrWebComponents: "Morten"

//choose 1 & 3 in the array
const [mrFrontend, , mrReact] = teachers;
```

Destructuring

When States & Props
change, your component
is automatically updated!

React *reacts* to the
changes.

```
import React, { useState } from "react";

function Greeting(props) {
  const [count, setCount] = useState(0)

  const updateCount = () => {
    setCount(count + 1)
  }

  return (
    <div>
      <h1>Hello, {props.name}!</h1>
      <p>You've clicked {count} times</p>
      <button onClick={updateCount}>
        Click me
      </button>
    </div>
  );
}


```

Call the update function
with a new value to set the state.
NEVER set the value directly

count will update
AUTOMATICALLY!

Use curly braces
to set attribute
to JS value

Set onClick attribute of
a button to a custom function

Tryout useState

1. Use a previous React project or create a new.
2. Create a component called Counter.
3. The Counter component should have a similar structure as the component to the right, with a count state, updateCount function, displaying the count state and a button calling updateCount on click.
4. Render the Counter component in your App component or another component.
5. Test and think of the pros of using React and states compared to Vanilla JS.
6. Try to render the Counter component in another component.

```
import React, { useState } from "react";  
  
function Greeting(props) {  
  const [count, setCount] = useState(0)  
  const updateCount = () => {  
    setCount(count + 1)  
  }  
  
  return (  
    <div>  
      <h1>Hello, {props.name}!</h1>  
      <p>You've clicked {count} times</p>  
      <button onClick={updateCount}>  
        Click me  
      </button>  
    </div>  
  );  
}
```

Import useState from React

Call useState and pass in a default value

useState returns the current value and an update function

Display state in curly braces

List, loop and map

```
const DATA = [
  { id: 4, title: 'A New Hope' },
  { id: 5, title: 'The Empire Strikes Back' },
  { id: 6, title: 'Return of the Jedi' }
]
```

```
const App = () => <MyList items={DATA} />
```

```
function MyList(props) {
  return (
    <div>
      {
        props.items.map(item => {
          return <p key={item.id}>{item.title}</p>
        })
      }
    </div>
  )
}
```

Annotations for the code:

- Wrap entire JS in curly braces
- Map over data that was passed in as props
- Pass unique key attribute to each element
- Use curly braces like normal to display data
- Return JSX from each iteration

List, loop and map

```
const contacts = [
  {
    id: 1,
    name: "Birgitte Hansen",
    mail: "b@hansen.com"
  },
  {
    id: 2,
    name: "Jens Petersen",
    mail: "jens@petersen.com"
  },
  {
    id: 3,
    name: "Hanne Hansen",
    mail: "hanne@hansen.com"
  }
];

export default function ContactList() {
  return (
    <section className="contact-list">
      {contacts.map(contact => (
        <article className="card" key={contact.id}>
          <h2>{contact.name}</h2>
          <a href={`mailto:${contact.mail}`}>{contact.mail}</a>
        </article>
      )));
    </section>
  );
}
```

Data list

Map over the list
and return jsx

useEffect()

<https://www.youtube.com/watch?v=TNhalSOUy6Q>

useEffect(...)

... a hook that allows us to do side effects in a component, like fetching data, directly updating the DOM, and timers.

```
import React, { useState, useEffect } from "react";
```

```
function GetData(props) {
  const [data, setData] = useState({});

  useEffect(() => {
    fetch("https://swapi.co/api/people/" + props.id)
      .then(response => response.json())
      .then(result => setData(result));
  }, [props.id]);

  return (
    <div>
      <p>Name: {data && data.name}</p>
    </div>
  );
}
```

Import useEffect from React

Call useEffect with a function as the first argument

The second argument is an array of dependencies. Don't forget this!

Do async actions like data fetching inside the callback

useEffect(...)

useEffect accepts two arguments.

We should always include the second parameter which accepts an array of dependencies.

useEffect runs on every render and when the dependencies change.

```
useEffect(() => {  
  |   //Runs on every render  
});
```

```
useEffect(() => {  
  |   //Runs only on the first render  
}, []);
```

```
useEffect(() => {  
  |   //Runs on the first render  
  |   //And any time any dependency value changes  
}, [prop, state]);
```

Fetch

... get & post data from and to a data source
... can perform network requests to a server

```
1 let promise = fetch(url, [options])
```

- `url` – the URL to access.
- `options` – optional parameters: method, headers etc.

Without `options`, this is a simple GET request, downloading the contents of the `url`.

Fetch & useEffect in React


In useEffect, perform the sideeffect (fetch) to get data from a data source.
And save the response data in a state using useState.

```
function PostsPage() {
  const [posts, setPosts] = useState([]);

  useEffect(() => {
    async function getPosts() {
      const url = "https://raw.githubusercontent.com/cederdorff/web-frontend/main/data/posts.json";
      const response = await fetch(url);
      const data = await response.json();
      setPosts(data);
    }
    getPosts();
  }, []);


  return (
    <section className="page">
      {posts.map(post => (
        <div>
          <h2>{post.title}</h2>
          <p>{post.content}</p>
        </div>
      ))}
    </section>
  );
}
```

1. Use a new create project. The goal is to fetch and display a grid of posts using `useState` and `useEffect` (See screen dump to the right).
2. Create a component called `Posts` returning a section with an `h1` (with a title) and another section as your grid container. Render the `Post` component in the `App` and test it in the browser.
3. In `Posts` component, implement a state called `posts`. The state must be initialised with an empty array in `useState`.
4. Use `useEffect` to fetch post data from the URL to the right. Save the fetched posts in the state. Use `console.log(...)` to test your fetch call.
5. In the grid container, map through the `posts` state and create an `article` for every post (similar to the JS Fetch Posts exercise). Display the properties `image`, `title` and `body` in matching HTML tags inside of the `article` tag. Also add a `key` attribute on the `article` tag using the `post.id` value.

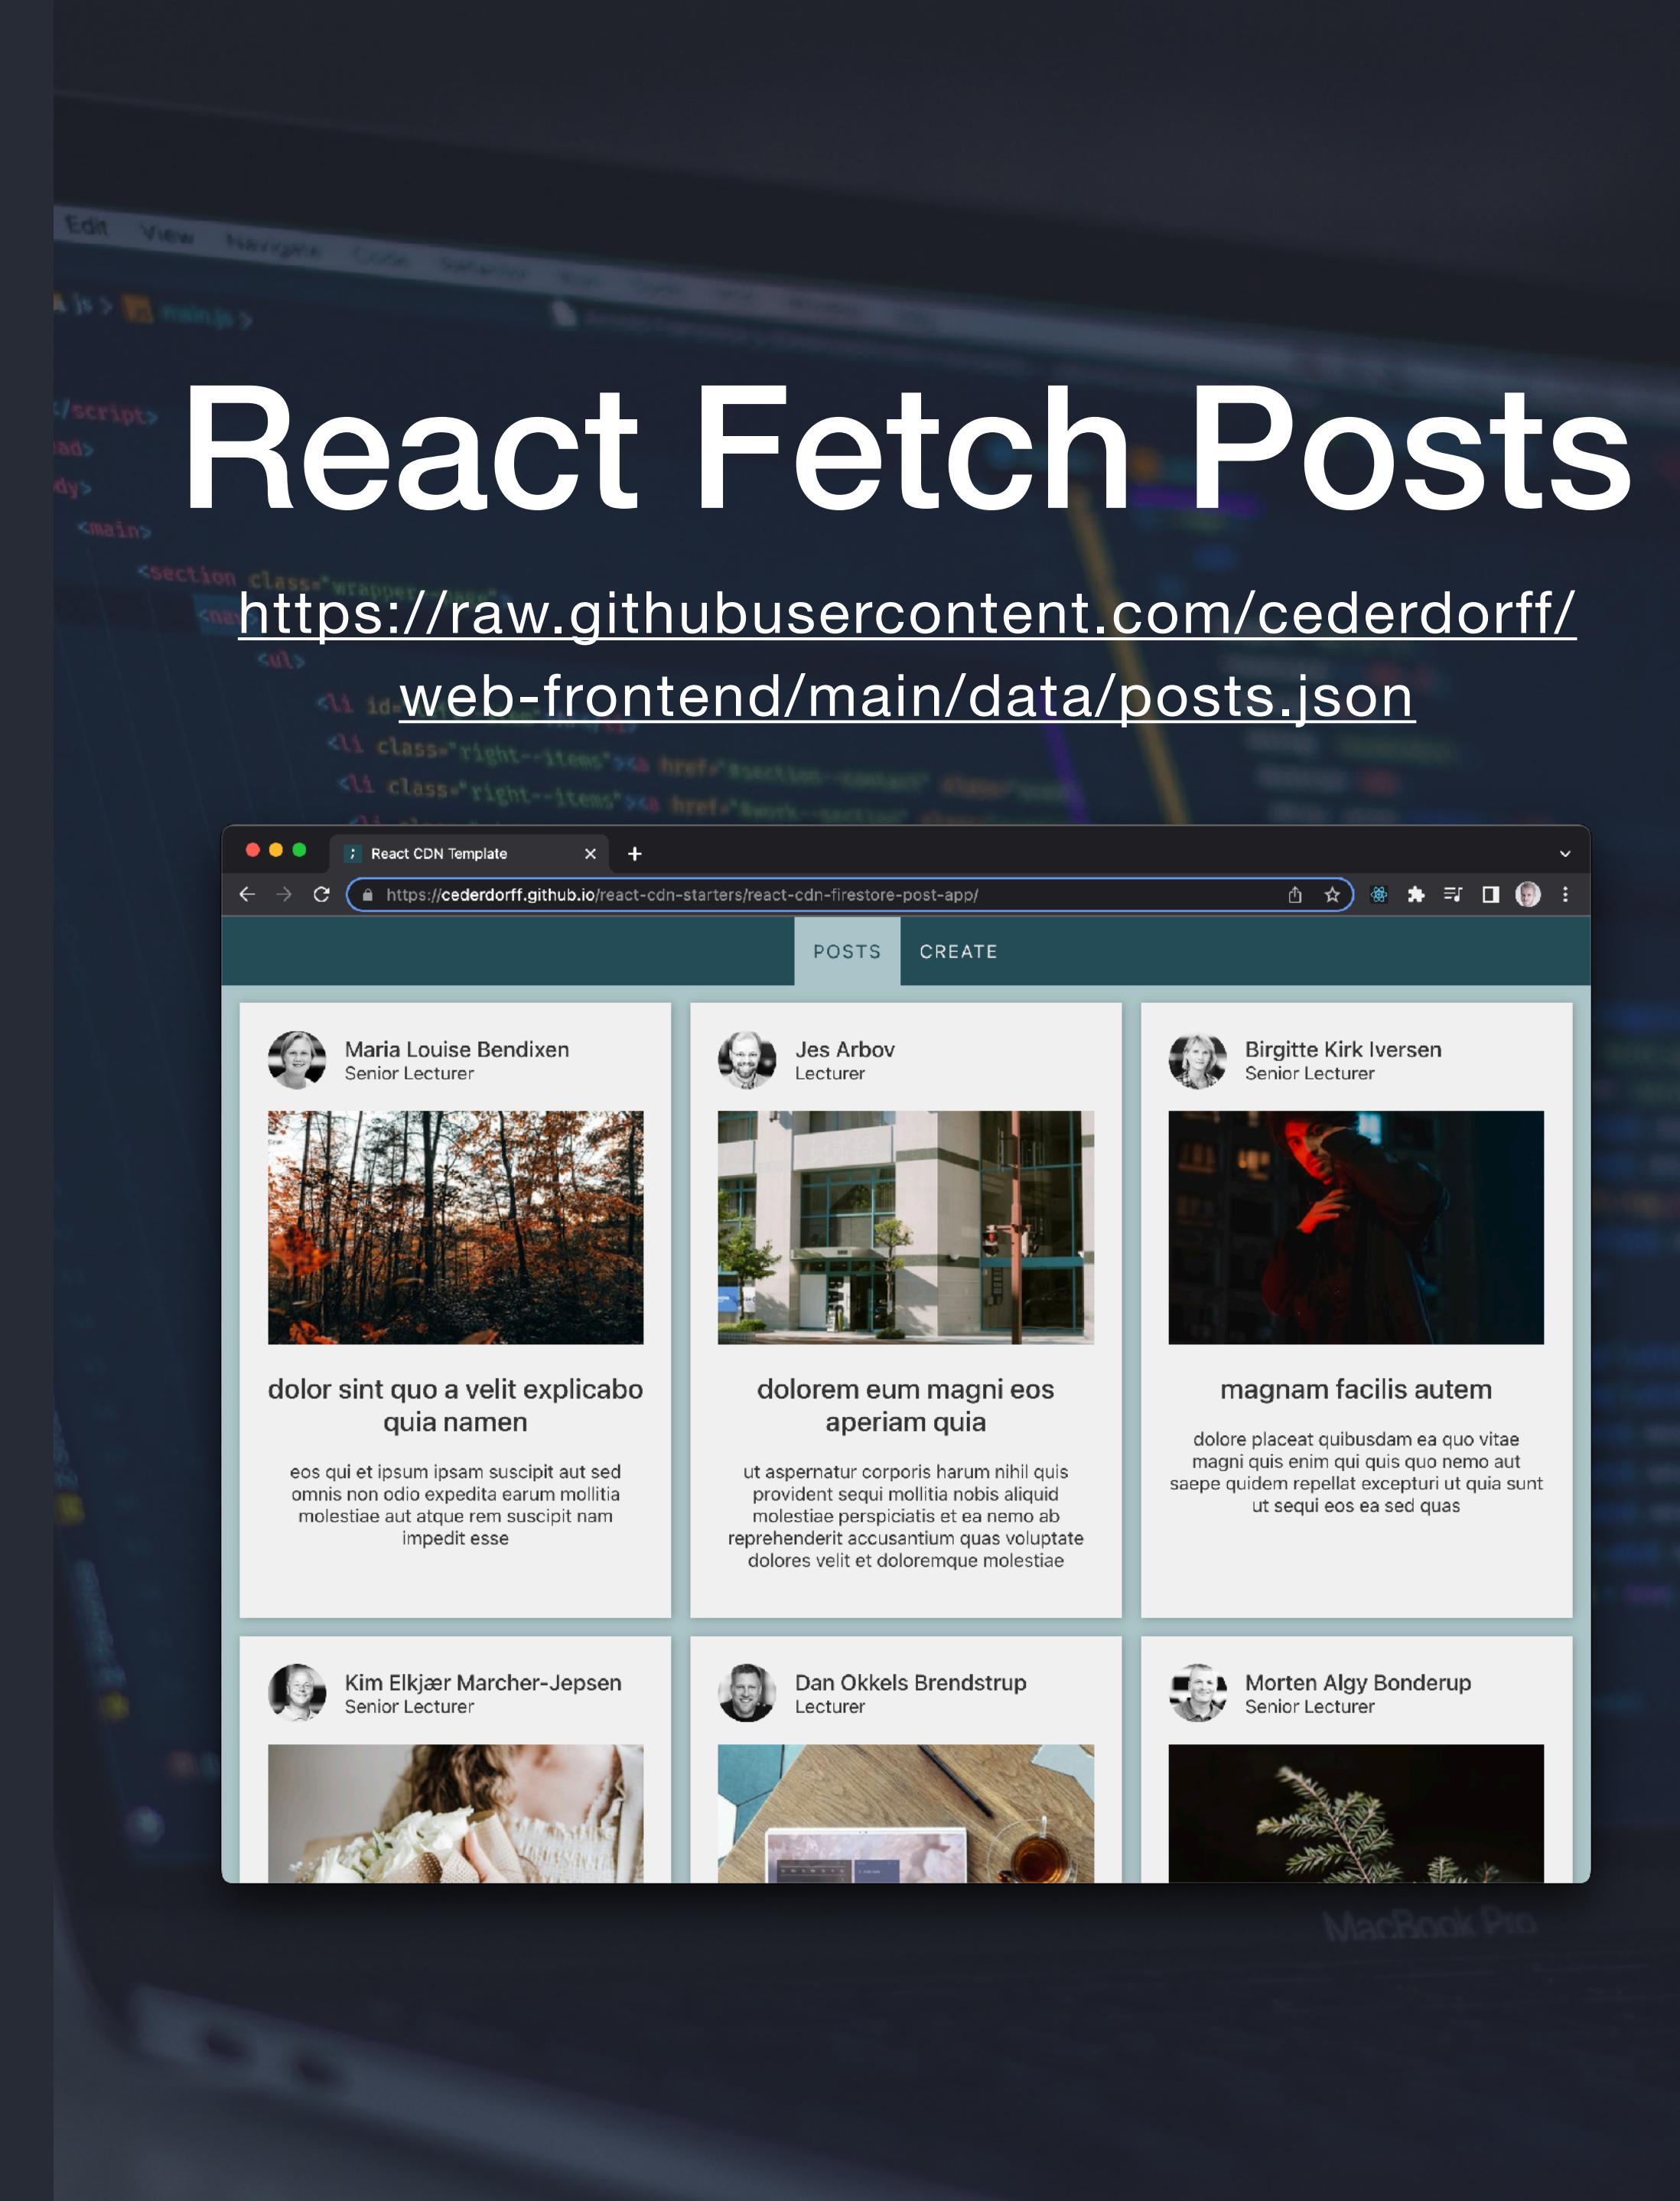


Build Reusable Components

UI can be broken down to small block or modules called components. We strive for independent (and small) components.

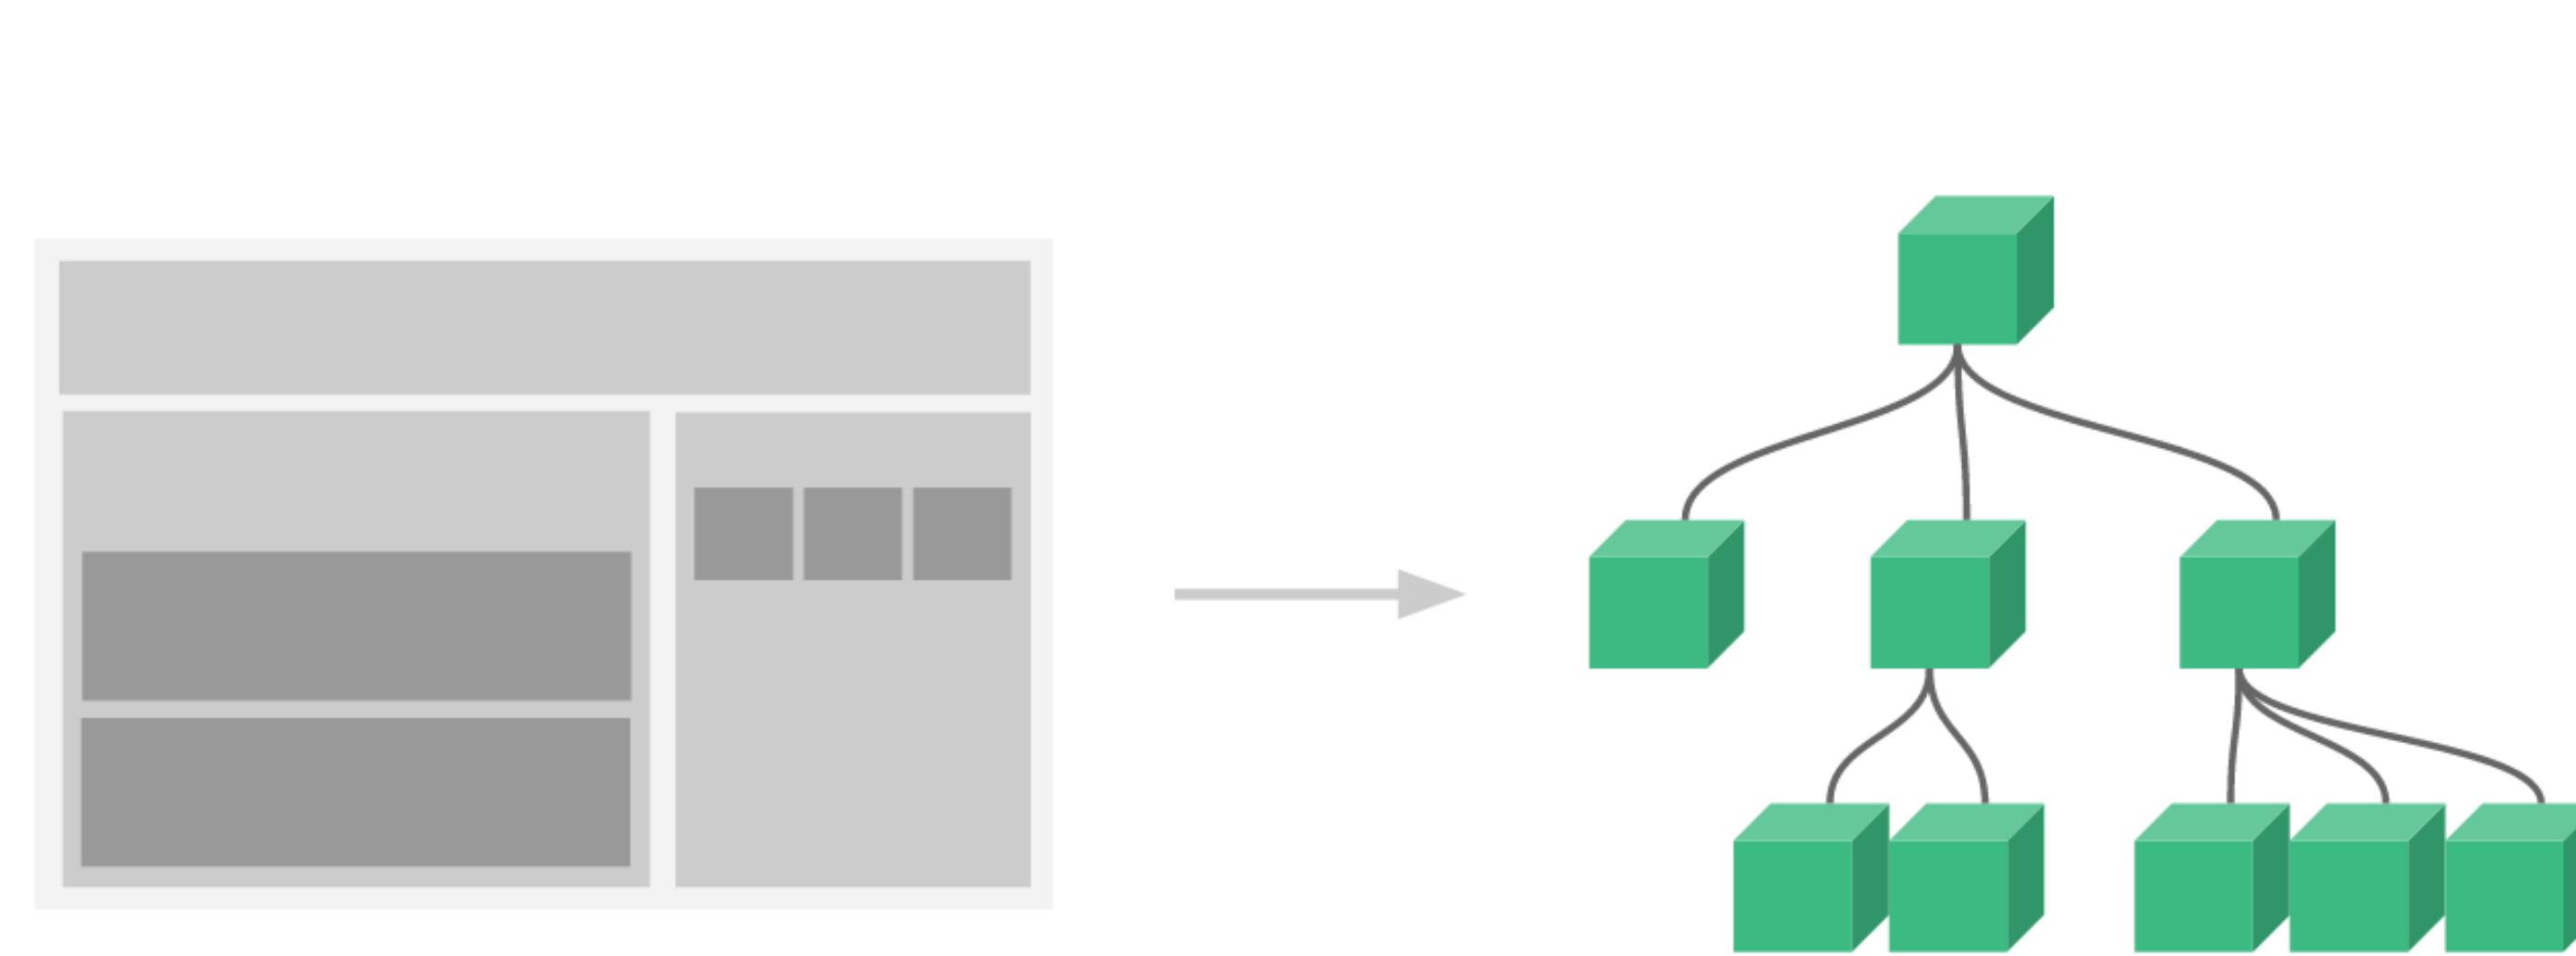

6. Split your Posts component into more components. Start by creating a new component called PostCard.
7. Extract the post article logic from the Posts component to the PostCard component (only the article not the .map part).
8. Make sure PostCard takes in a prop called post. Use the prop to render the post in PostCard.
9. Inside of your .map in your Posts component render a PostCard and pass in post as a prop. A PostCard component will be rendered for every post. Remember to add a key attribute on the PostCard. (and remove it from the article).

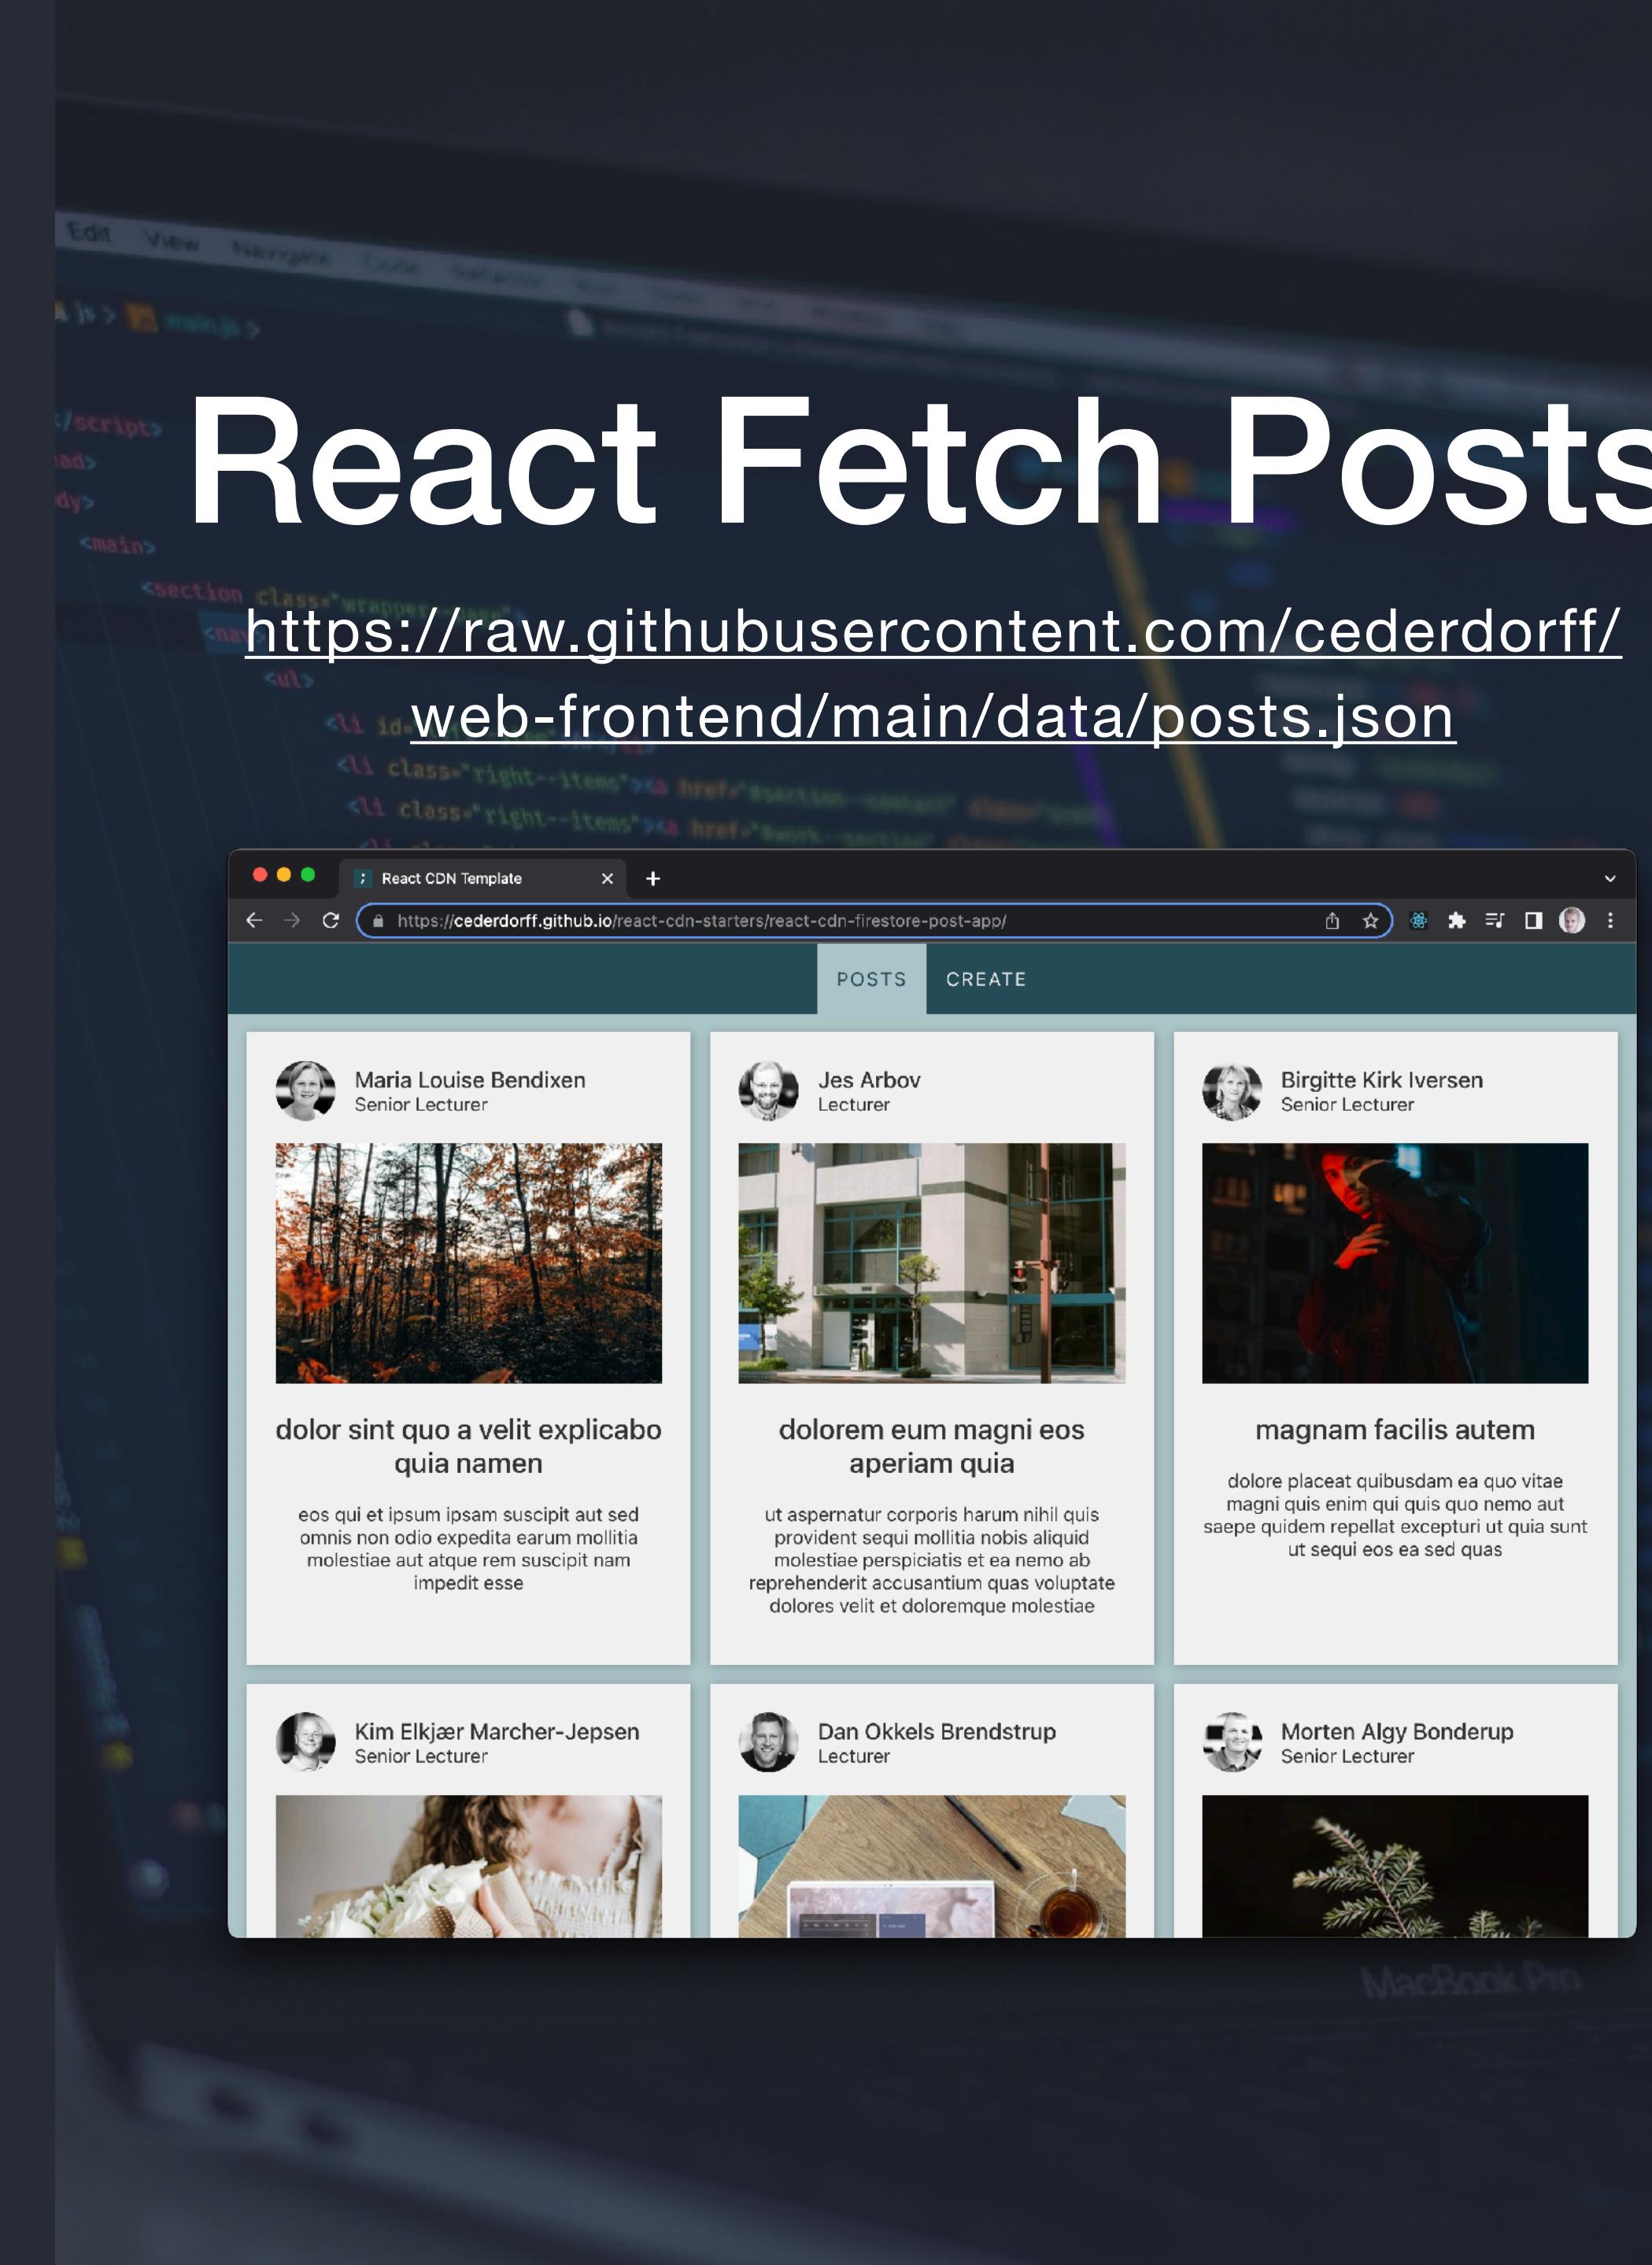

Style your component

Regular Stylesheet

```
import "./styles.css";

function NormalCSS() {
  return <p className="big-text">
    BIG!
  </p>;
}
```

Use `className` instead
of `class`, because
`class` is a restricted
word in javascript

Inline Styles

```
function InlineStyle() {
  return (
    <p
      style={{

        fontSize: 20,
        color: "#0000ff"
      }}
    >
      Blue Text
    </p>
  );
}
```

Double curly braces
because you're defining
a JS object inside of JSX

Camel case
attributes

Values like colors
must be in strings

Shorter and simpler way to do if/else

The screenshot shows a web browser window with the title "Conditional branching: if, ?" and the URL <https://javascript.info/ifelse#conditional-operator>. The page content is about the conditional operator (ternary operator). It includes a sidebar with navigation links for chapters like "JavaScript Fundamentals" and "Lesson navigation". The main content area has a heading "Conditional operator '?'". It explains that sometimes we need to assign a variable depending on a condition, and provides an example code snippet:

```
1 let accessAllowed;
2 let age = prompt('How old are you?', '');
3
4 if (age > 18) {
5   accessAllowed = true;
6 } else {
7   accessAllowed = false;
8 }
9
10 alert(accessAllowed);
```

It then states that the so-called "conditional" or "question mark" operator lets us do that in a shorter and simpler way. It describes the syntax: `let result = condition ? value1 : value2;`. It explains that the `condition` is evaluated: if it's truthy then `value1` is returned, otherwise – `value2`. An example is shown:

```
1 let accessAllowed = (age > 18) ? true : false;
```

At the bottom of the page, there is an advertisement for "Kendo UI Kits for Figma: Material, Bootstrap, Default" with a "GET UI KITS" button.

<https://javascript.info/ifelse#conditional-operator>
Ternary Operator

? . is a safe way to access nested object properties

The screenshot shows a dark-themed web browser window displaying the [JavaScript.info](https://javascript.info/optional-chaining) website. The page title is "Optional chaining '?.'". The URL in the address bar is <https://javascript.info/optional-chaining>. The page content is about optional chaining, a recent addition to the JavaScript language. It discusses the "non-existing property" problem and provides code examples. A sidebar on the left contains navigation links for chapters like "Objects: the basics" and "Lesson navigation". A sidebar at the bottom is sponsored by LogicMonitor.

Chapter
Objects: the basics

Lesson navigation

The "non-existing property" problem

Optional chaining

Short-circuiting

Other variants: `?()`, `?[]`

Summary

Comments

Share

[Edit on GitHub](#)

LogicMonitor

Intelligent insights you can actually use. Smarter troubleshooting, more possibilities for your applications.

Optional chaining '?.'

30th March 2022

Optional chaining '?.'

A recent addition

This is a recent addition to the language. Old browsers may need polyfills.

The optional chaining `?.` is a safe way to access nested object properties, even if an intermediate property doesn't exist.

The "non-existing property" problem

If you've just started to read the tutorial and learn JavaScript, maybe the problem hasn't touched you yet, but it's quite common.

As an example, let's say we have `user` objects that hold the information about our users.

Most of our users have addresses in `user.address` property, with the street `user.address.street`, but some did not provide them.

In such case, when we attempt to get `user.address.street`, and the user happens to be without an address, we get an error:

```
1 let user = {}; // a user without "address" property
2
3 alert(user.address.street); // Error!
```

<https://javascript.info/optional-chaining>

?? returns the first argument if it's not null/undefined

The screenshot shows a dark-themed web browser window displaying the [Nullish coalescing operator ??](https://javascript.info/nullish-coalescing-operator) article from the [JavaScript.info](https://javascript.info) website.

The page title is "Nullish coalescing operator '??'" and the subtitle indicates it is a "Recent addition". A note states: "This is a recent addition to the language. Old browsers may need polyfills."

The main content explains that the nullish coalescing operator is written as two question marks `??`. It treats `null` and `undefined` similarly. The result of `a ?? b` is:

- if `a` is defined, then `a`,
- if `a` isn't defined, then `b`.

In other words, `??` returns the first argument if it's not `null/undefined`. Otherwise, the second one.

The nullish coalescing operator isn't anything completely new. It's just a nice syntax to get the first "defined" value of the two.

We can rewrite `result = a ?? b` using the operators that we already know, like this:


```
1 result = (a !== null && a !== undefined) ? a : b;
```

The left sidebar contains a navigation menu with links to "Chapter", "JavaScript Fundamentals", "Lesson navigation", "Comparison with ||", "Precedence", "Summary", "Comments", "Share" (with Twitter and Facebook icons), and "Edit on GitHub". There is also an advertisement for "Ad by Carbon" featuring "PagerDuty" and an "eBook" titled "Best practices for full-service ownership".

<https://javascript.info/nullish-coalescing-operator>

create-react-app

Starter template for your react app

Soon to be  deprecated!

Create React App

Set up a modern web app by running one command.

Get Started

Less to Learn

You don't need to learn and configure many build tools. Instant reloads help you focus on development. When it's time to deploy, your bundles are optimized automatically.

Only One Dependency

Your app only needs one build dependency. We test Create React App to make sure that all of its underlying pieces work together seamlessly – no complicated version mismatches.

No Lock-In

Under the hood, we use webpack, Babel, ESLint, and other amazing projects to power your app. If you ever want an advanced configuration, you can "eject" from Create React App and edit their config files directly.

Generate create-react-app

Vite

Next Generation Frontend Tooling

Get ready for a development environment that
can finally catch up with you.




A modern build tool for web projects

<https://vitejs.dev/>

React + Vite

Action	Past	Present and future
Create REACT development environment	<i>npx create-react-app .</i>	<ol style="list-style-type: none">1. In the terminal: <i>npm create vite@latest</i>2. Type in a project name (= folder name)3. Select "React" from the menu (keyboard arrow down and press Enter)4. Select "JavaScript" from the menu (keyboard arrow down and press Enter)5. In VS Code: Open project folder6. In the terminal: <i>npm install</i>
Live preview in browser	<i>npm start</i>	<i>npm run dev</i>
Build version to upload to your web hotel	<i>npm run build</i>	<i>npm run build</i> <ol style="list-style-type: none">1. In "dist" folder: Update <title> in index.html and change the favicon.2. Upload the content of the "dist" folder to your web hotel.
Preview the distribution version in browser before you upload to web hotel		<i>npm run preview</i>

Comments or questions? Feel free to write to moab@eaaa.dk

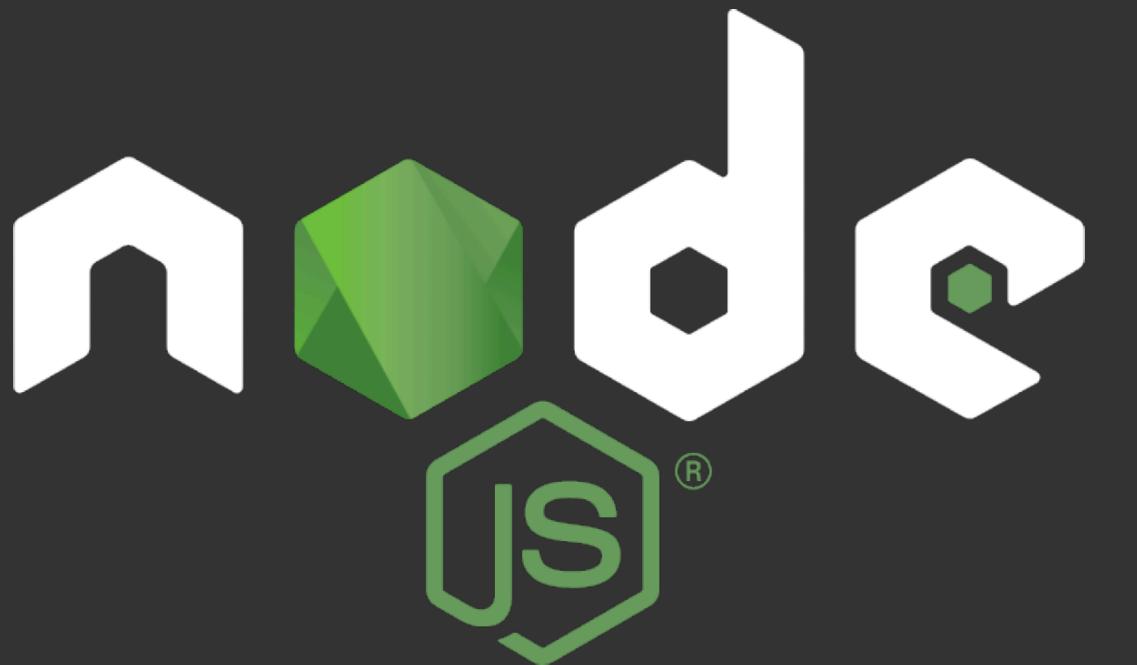

Getting started


Download & install Node.js & NPM: nodejs.org/en/

Follow VS Code, Node.js & npm to make sure you have installed
Node and NPM

Builds tools,
Package Managers,
Compilers, Transpilers,
Module Bundlers &
Command-line Interface (CLI)



It is simply just tools!

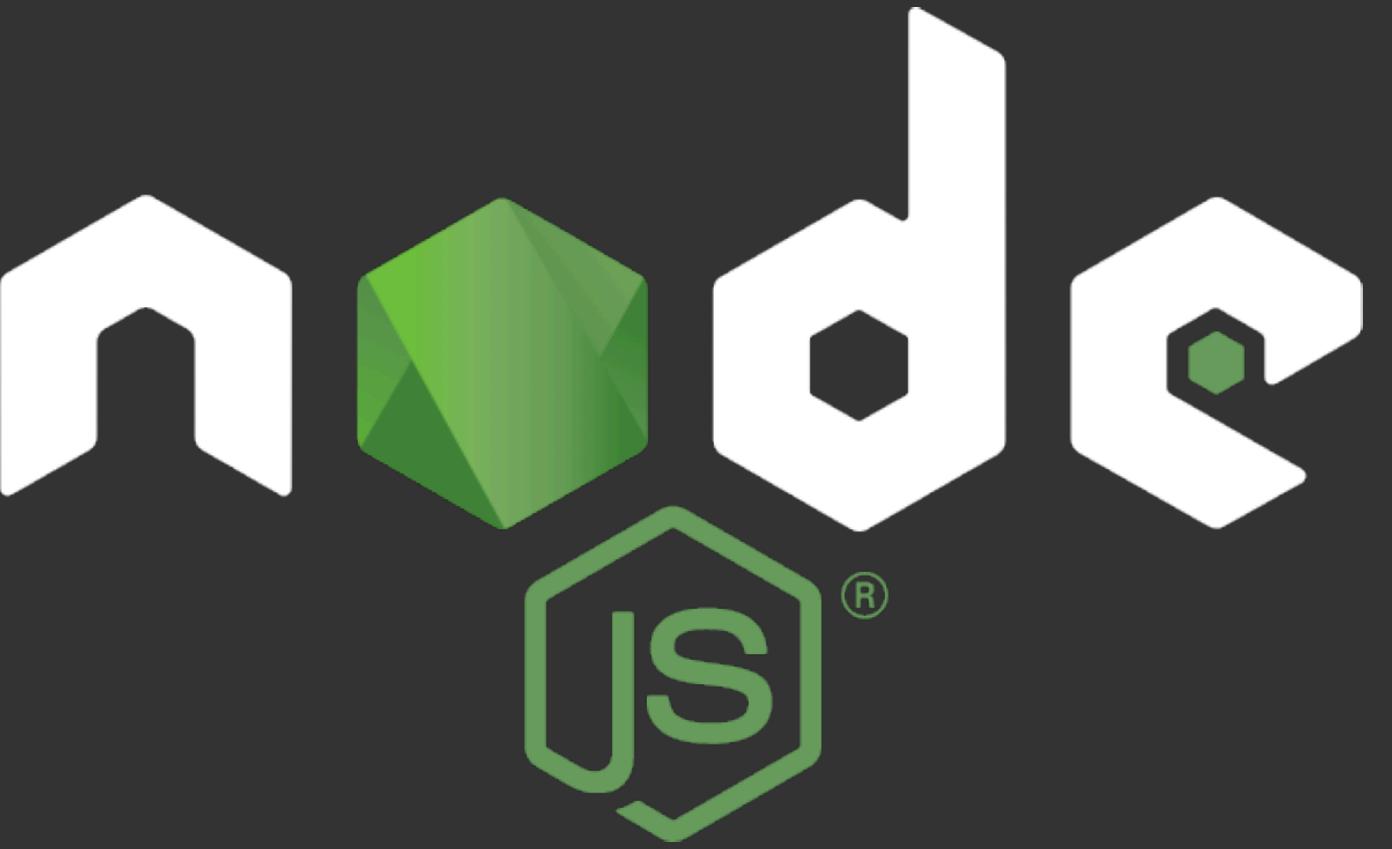

JavaScript runtime environment
Executes JavaScript outside of the browser


Npm is a package manager for node.js
packages - or modules



Node.js packages contains all the files you need for
a module.

Modules are JavaScript libraries you can include in
your project.

node_modules

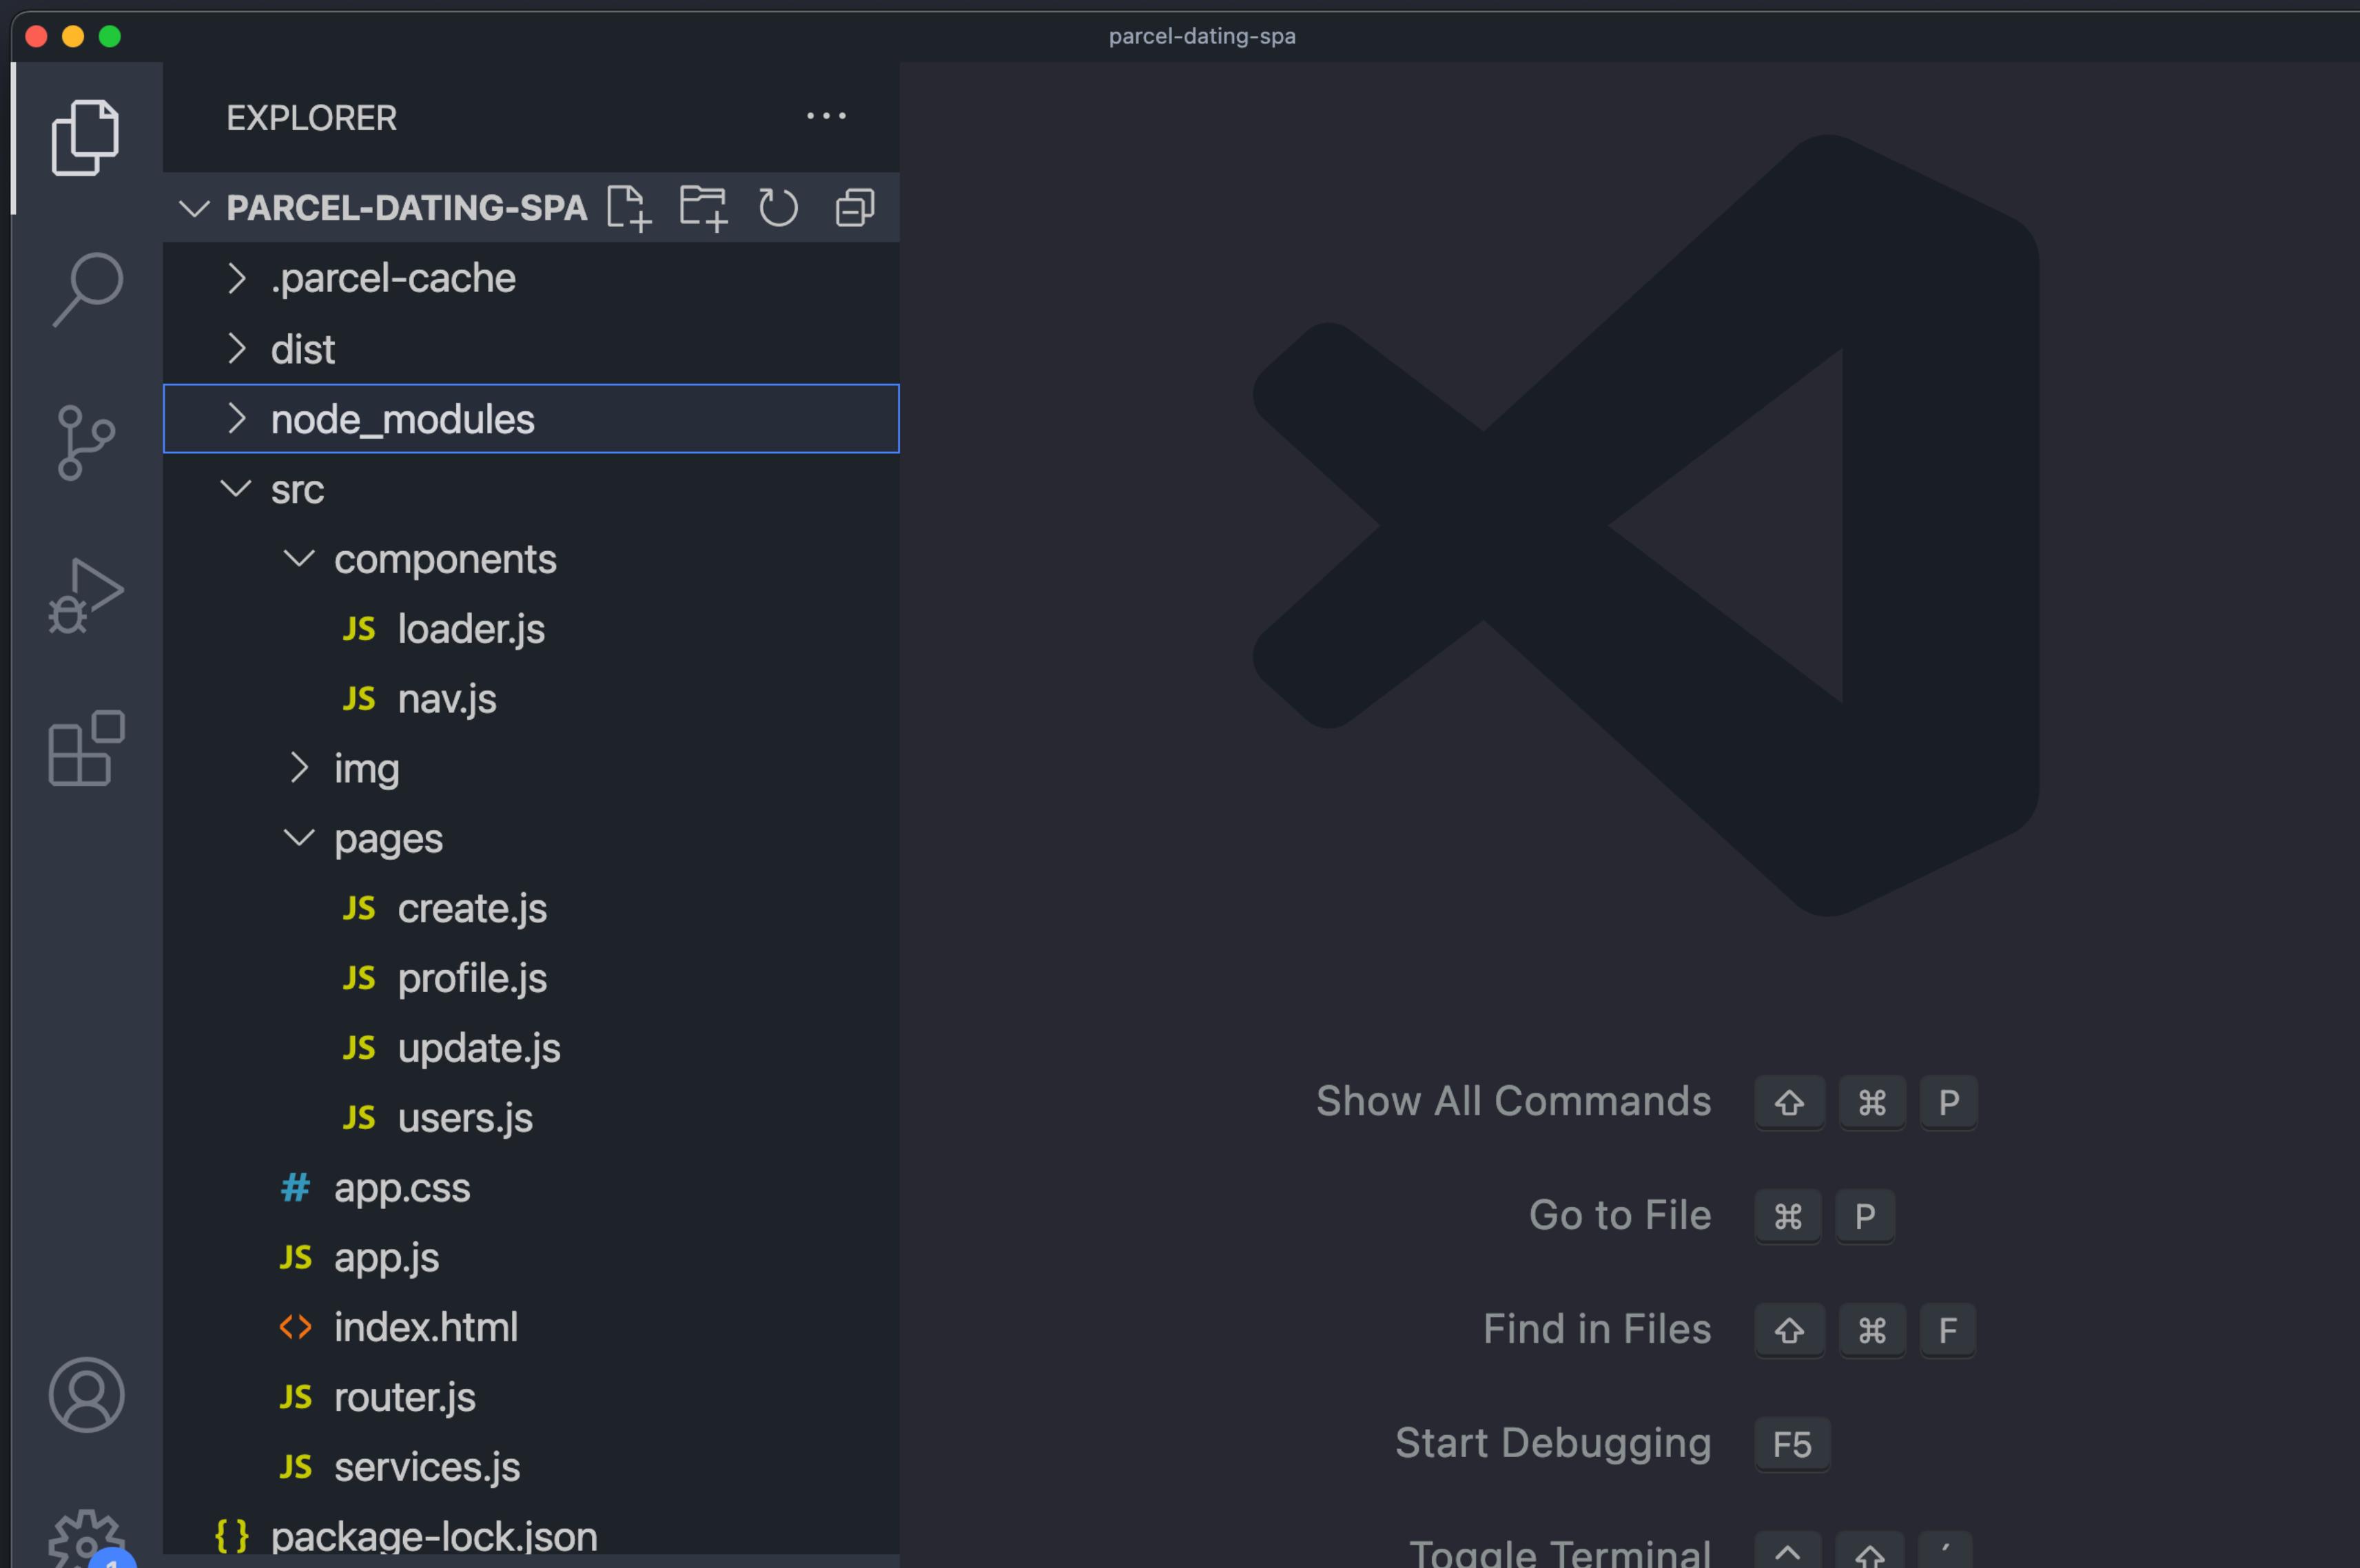

npm consists of

1. Website to discover packages

2. Command line interface (cli)


3. A registry - database with JS software /
node modules

<https://docs.npmjs.com/about-npm/>


Command Line Interface

... a program that allows users to type text commands to execute functions.

npm uses CLI to install software & packages.

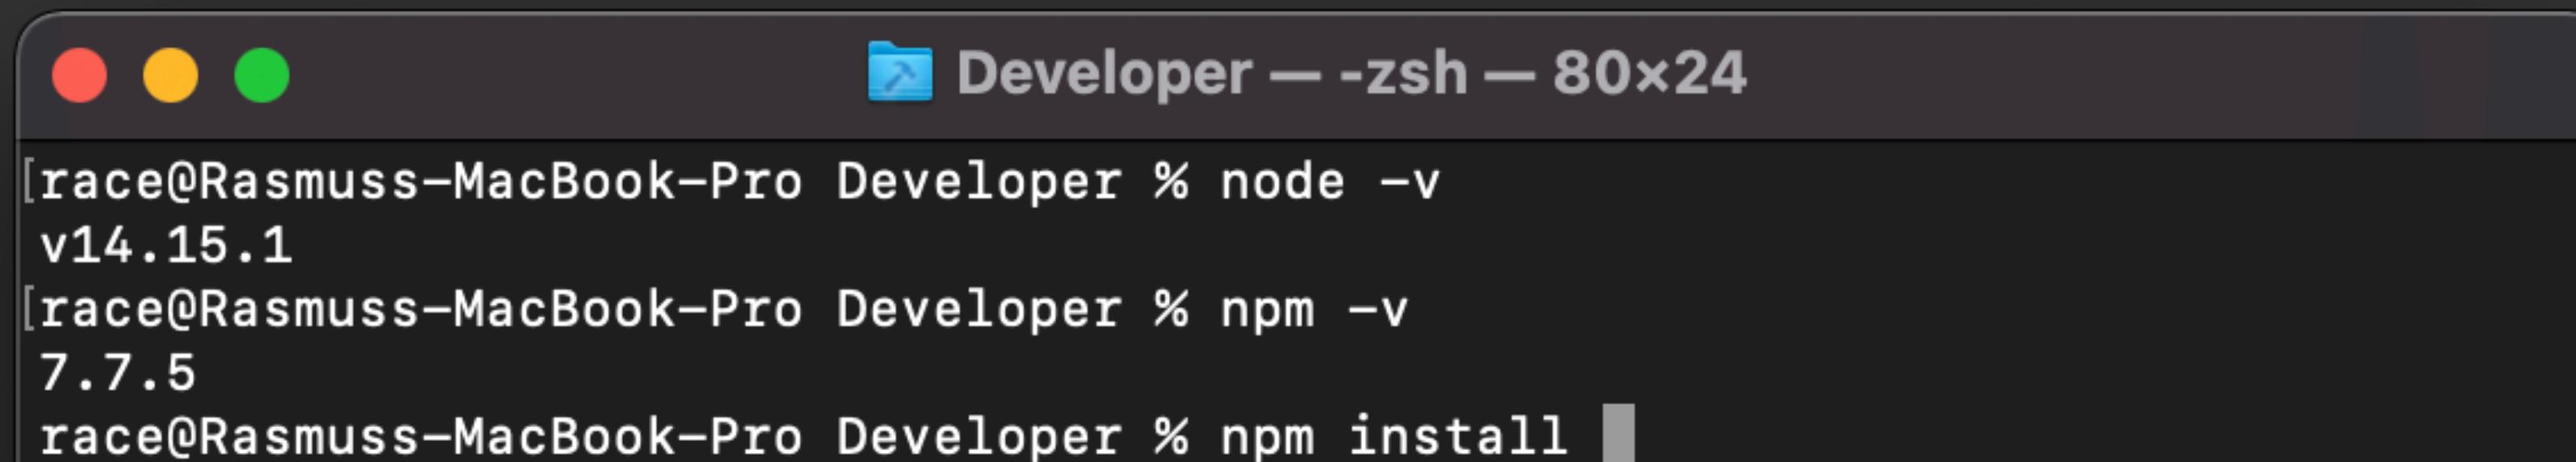

```
[race@Rasmuss-MacBook-Pro Developer % node -v
v14.15.1
[race@Rasmuss-MacBook-Pro Developer % npm -v
7.7.5
race@Rasmuss-MacBook-Pro Developer % npm install ]
```

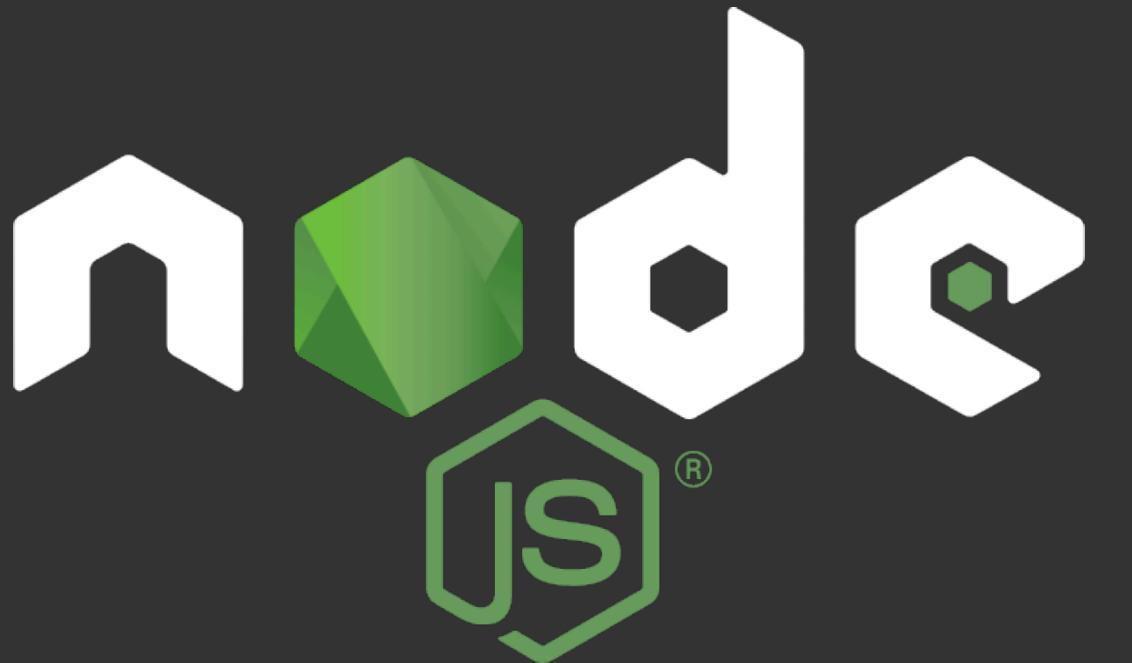

1. Download & install Node.js & npm: nodejs.org/en/
2. Check your version of npm & Node.js

```
race@macbookpro-9720 ~ % node -v
v16.13.1
race@macbookpro-9720 ~ % npm -v
8.6.0
race@macbookpro-9720 ~ %
```

EXPLORER

REACT-PROJECTS

- > react-carousel
- > react-firebase-hooks
- > react-firebase-favorite-
- > react-firebase-post-ap|
- > react-firebase-read-create
- > react-spa-template ●
- > react-user-crud ●

New Terminal ⌘T

Split Terminal ⌘⇧T

Run Task...

Run Build Task... ⌘B

Run Active File

Run Selected Text

Show Running Tasks...

Restart Running Task...

Terminate Task...

Configure Tasks...


Configure Default Build Task...

react-projects

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL

```
race@macbookpro-9720 react-projects % node -v
v16.13.1
race@macbookpro-9720 react-projects % npm -v
8.6.0
race@macbookpro-9720 react-projects % █
```

zsh + × □ └ ^ ×

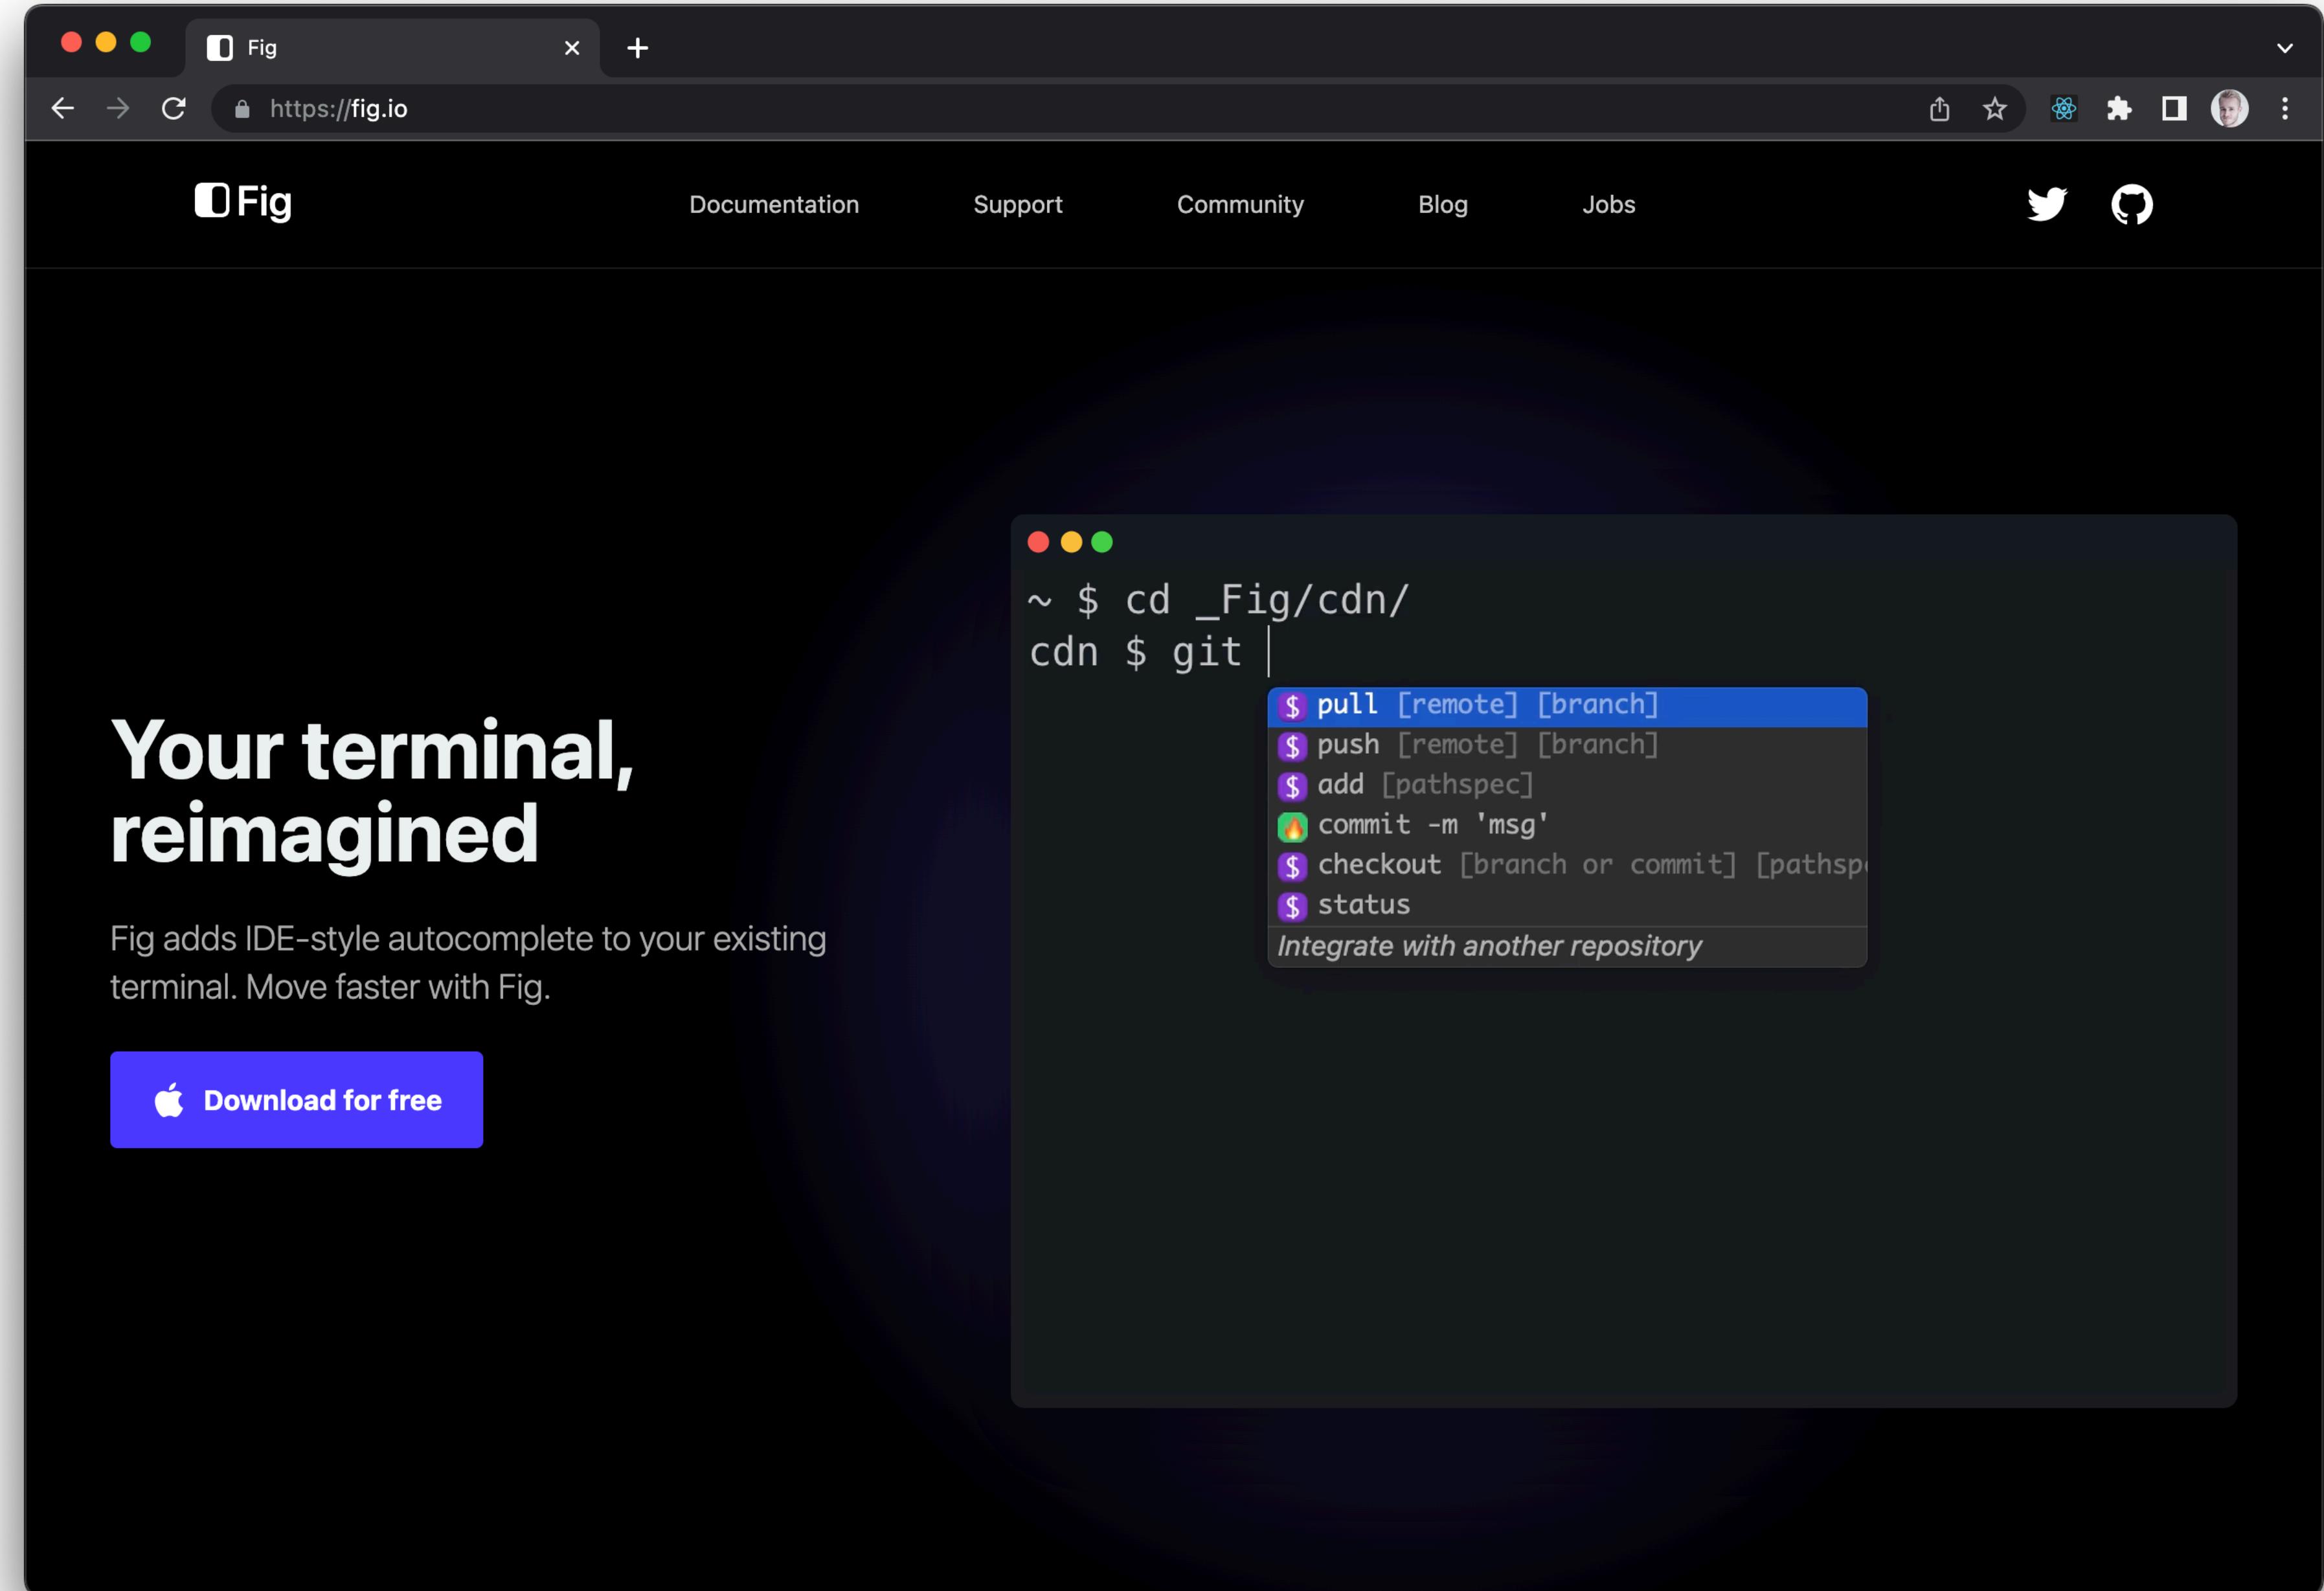


<https://fig.io/>

Canvas Users Case w/ React

React App <http://localhost:3000> Incognito (2)

Canvas Users

Show Teachers Search Sort by

 Anders Husted eaaahu@students.eaaa.dk Role: Student	 Anders Lassen Skrydstrup eaaanls@students.eaaa.dk Role: Student	 Aron Ingi Svansson eaaarsv@students.eaaa.dk Role: Student
 Benjamin Tranberg Nikolajsen eaabtn@students.eaaa.dk Role: Student	 Camilla Østrup Nørgaard camilla.nrgaard@yahoo.dk Role: Student	 Casper Hedegaard Hansen eaacahh@students.eaaa.dk Role: Student
		

<https://race.notion.site/Canvas-Users-Case-w-React-191f2533ac8248f4874c077796497d86>

Web App

.. is any program executed in the browser

Web App

.. is any program that performs a specific function
by using a web browser as its client

Web App

Do you know any web apps?

HTML




JS



CSS



Web App

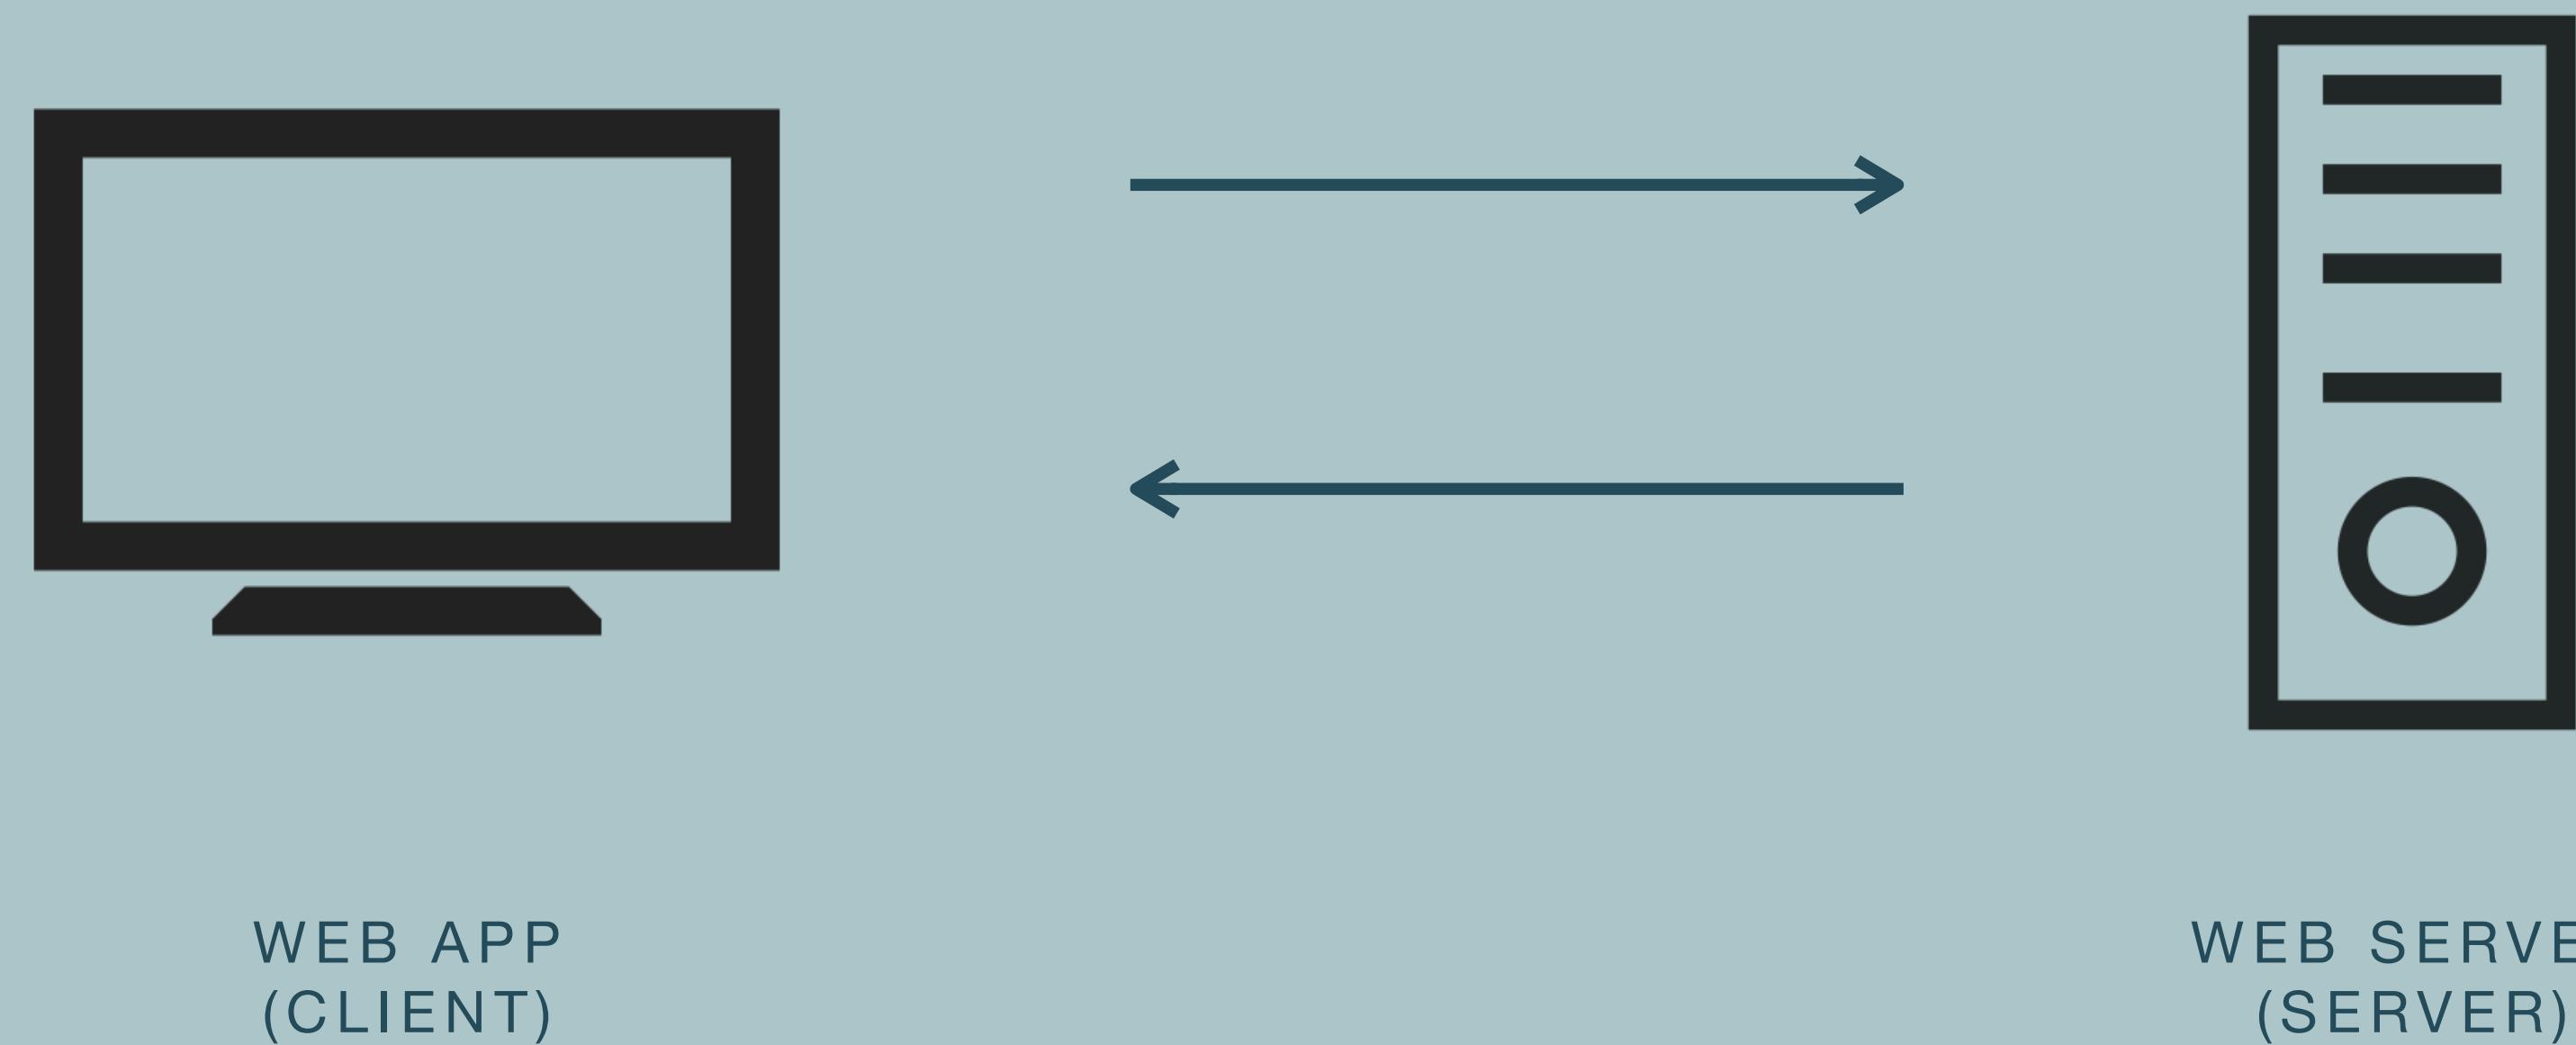

Website

The user wants to get something!

Web App

The user wants to do something!

Web App

Web as Action

Web App

Accessible anywhere, at any time!

React SPA Starter

localhost:5173

HOME

Posts

Maria Louise Bendixen
Senior Lecturer

Beautiful sunset at the beach

Invalid Date

Rasmus Cederdorff
Senior Lecturer

Newest

06/10/2023

Line Skjødt
Senior Lecturer & Internship Coordinator

Exploring the city center of Aarhus

24/06/2023

Rasmus Cederdorff
Senior Lecturer

Exploring the city streets of Aarhus

24/06/2023

Dan Okkels Brendstrup
Lecturer

A beautiful morning in Aarhus

24/06/2023

Maria Louise Bendixen
Senior Lecturer

Serenity of the forest

19/06/2023

React SPA Starter

localhost:5173


Apps KEA DAT DAT.js IT Arkitektur EAAA BOOKS Code & Templates Summer School -...

HOME CREATE

Posts

Sort by Newest Search by caption

Maria Louise Bendixen Senior Lecturer

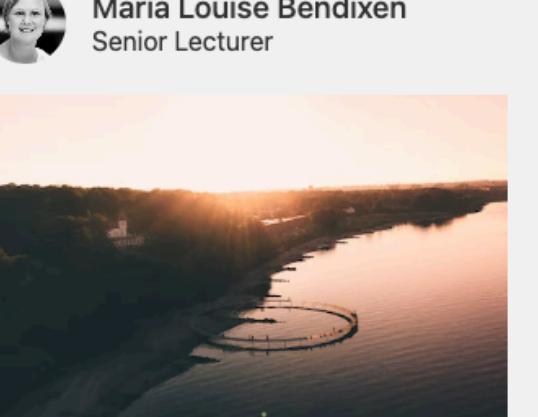

Beautiful sunset at the beach

Invalid Date


Rasmus Cederdorff Senior Lecturer



Newest

06/10/2023

Line Skjødt Senior Lecturer & Internship Coordinator

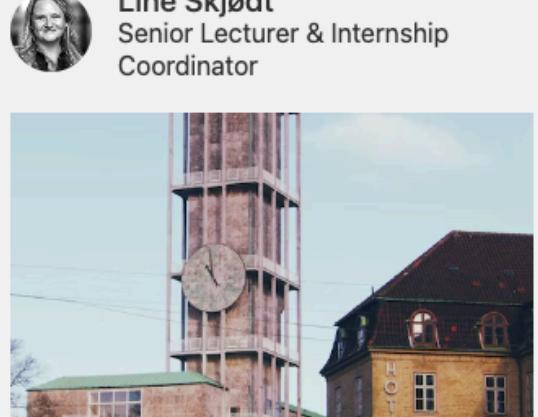

Exploring the city center of Aarhus

24/06/2023

Rasmus Cederdorff Senior Lecturer



Exploring the city streets of Aarhus

24/06/2023

Dan Okkels Brendstrup Lecturer



A beautiful morning in Aarhus

24/06/2023

Maria Louise Bendixen Senior Lecturer



Serenity of the forest

19/06/2023

React SPA Starter

localhost:5173/create

Apps KEA DAT DAT.js IT Arkitektur EAAA BOOKS Code & Templates Summer School -...


HOME CREATE

Create New Post

Body

Type a caption


Image



SAVE

Web App

- Any program or app executed in the browser.
- Any program that performs a specific function by using a web browser as its client
- The user wants to complete a task - to do something.
- Accessible anywhere, at any time.
- Not just about mobile devices.

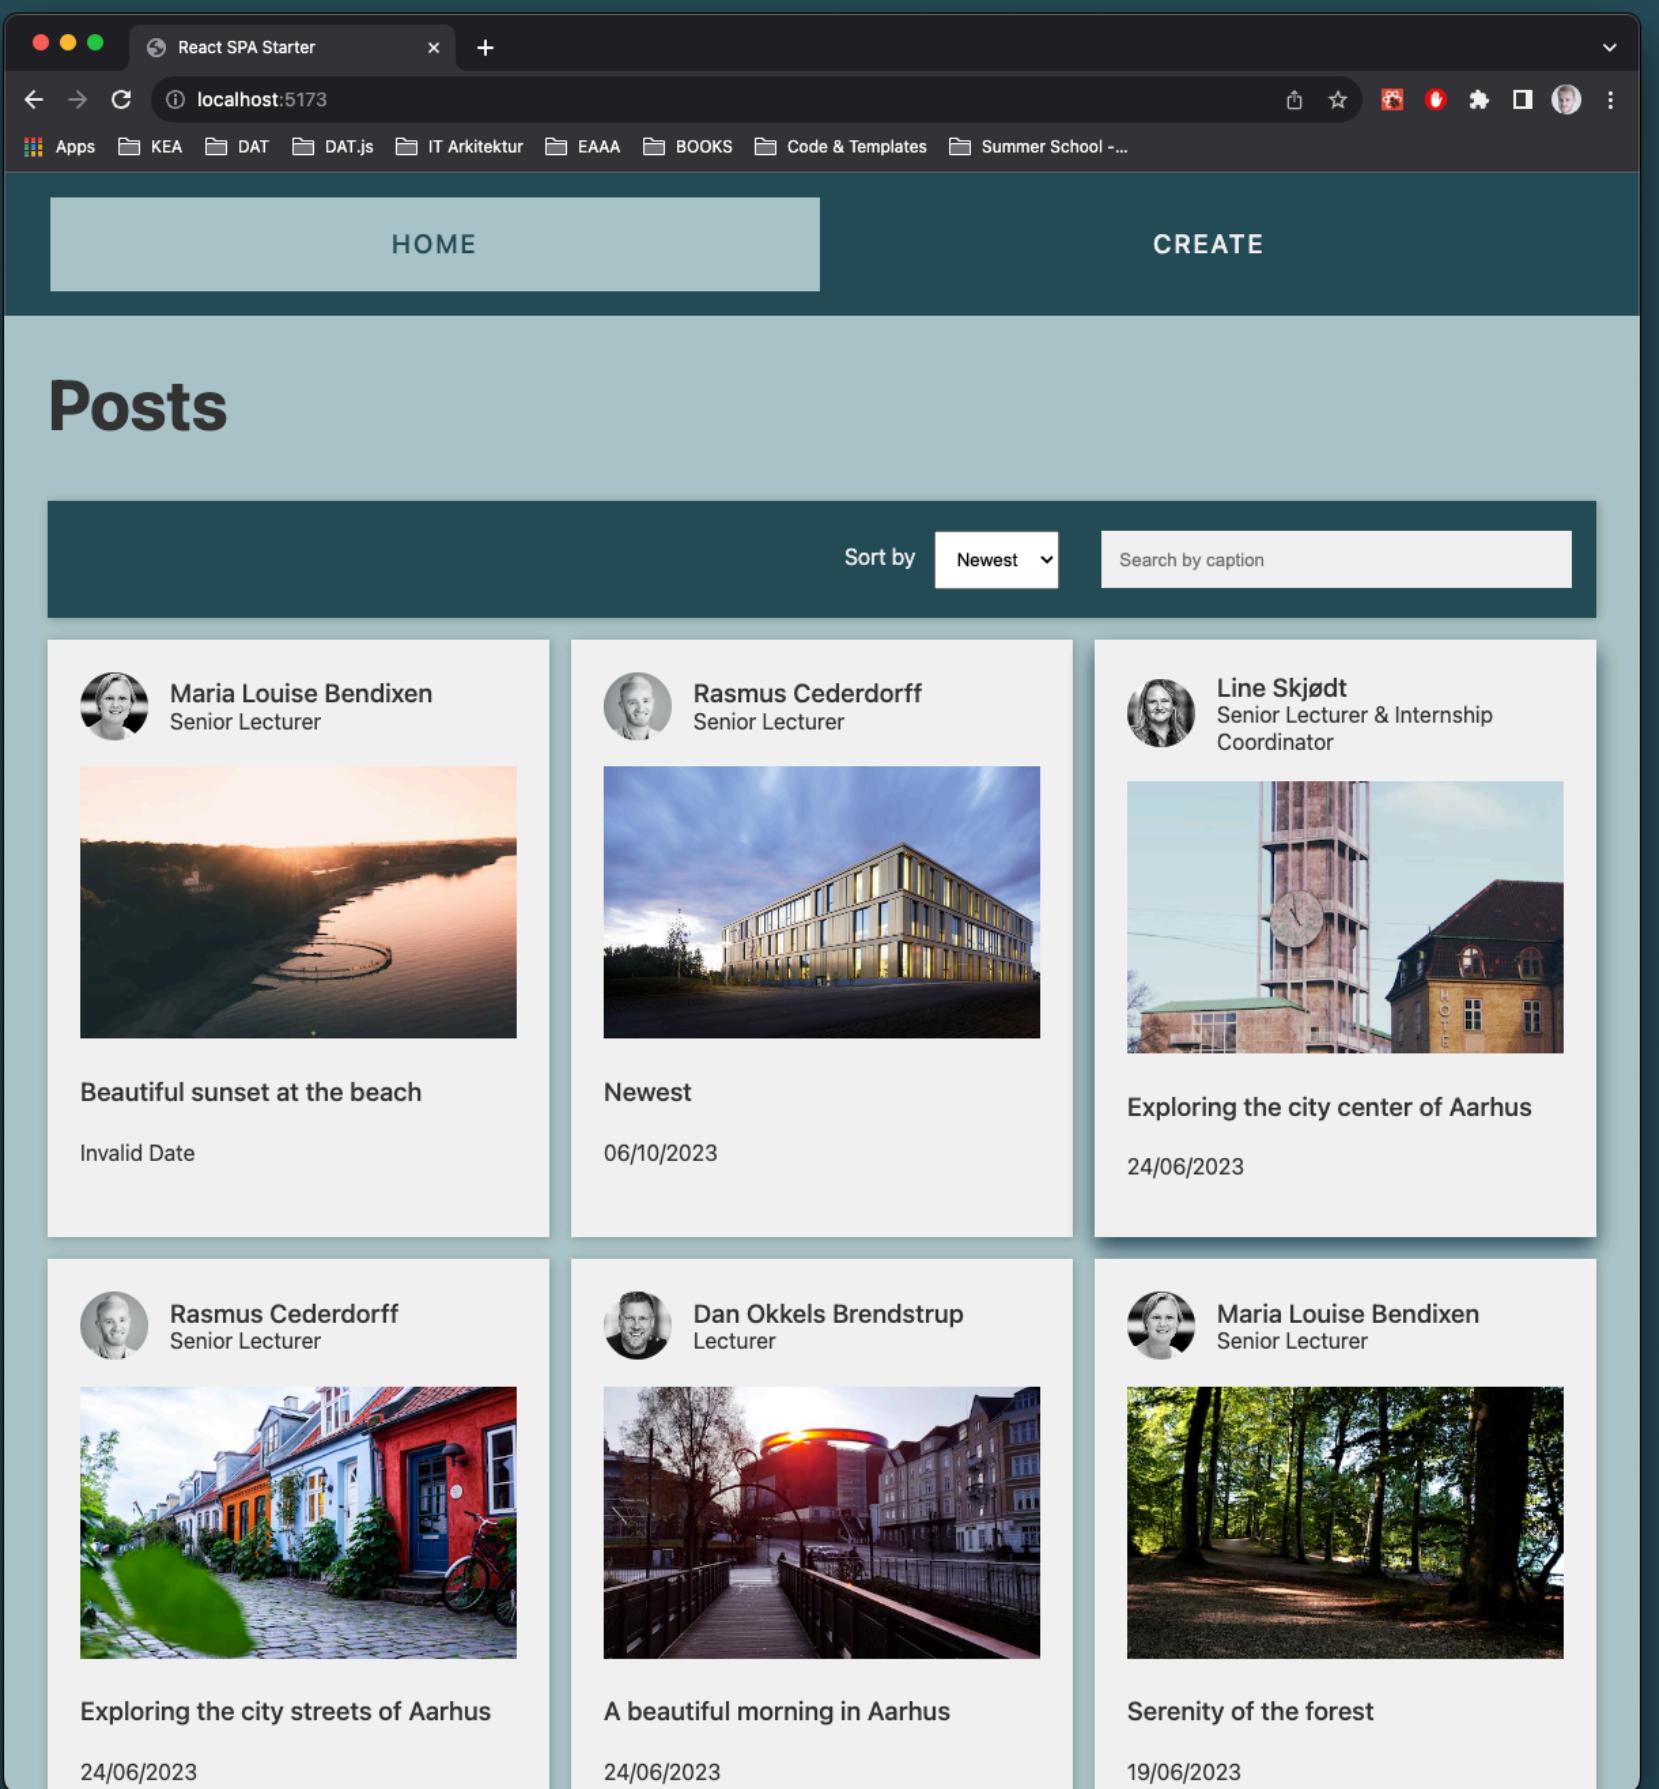

Web App

- Actions and functions
- Stored on a web server
- Using the browser as it's client:
Launched and executed by the browser
- Accessible anywhere, anytime - on any
device through the browser
- JavaScript, HTML & CSS
- Single Page Application
- Fetches data from data sources.



Types of (Web) Apps

WEB BASED

BROWSER BASED

API BASED

SOFTWARE AS A SERVICE

NATIVE WEB APP/ HYBRID APPS

PROGRESSIVE WEB APP

Single Page Apps

“A single-page application is an application that loads a single HTML page and all the necessary assets (such as JavaScript and CSS) required for the application to run. Any interactions with the page or subsequent pages do not require a round trip to the server which means the page is not reloaded.”

<https://reactjs.org/docs/glossary.html#single-page-application>

“ SPA (Single-page application)



[...] is a web app implementation that loads only a single web document, and then updates the body content of that single document via JavaScript APIs such as XMLHttpRequest and Fetch when different content is to be shown.

This therefore allows users to use websites without loading whole new pages from the server, which can result in performance gains and a more dynamic experience, with some tradeoff disadvantages such as SEO, more effort required to maintain state, implement navigation, and do meaningful performance monitoring.

”

<https://developer.mozilla.org/en-US/docs/Glossary/SPA>


MULTI PAGE APPLICATION

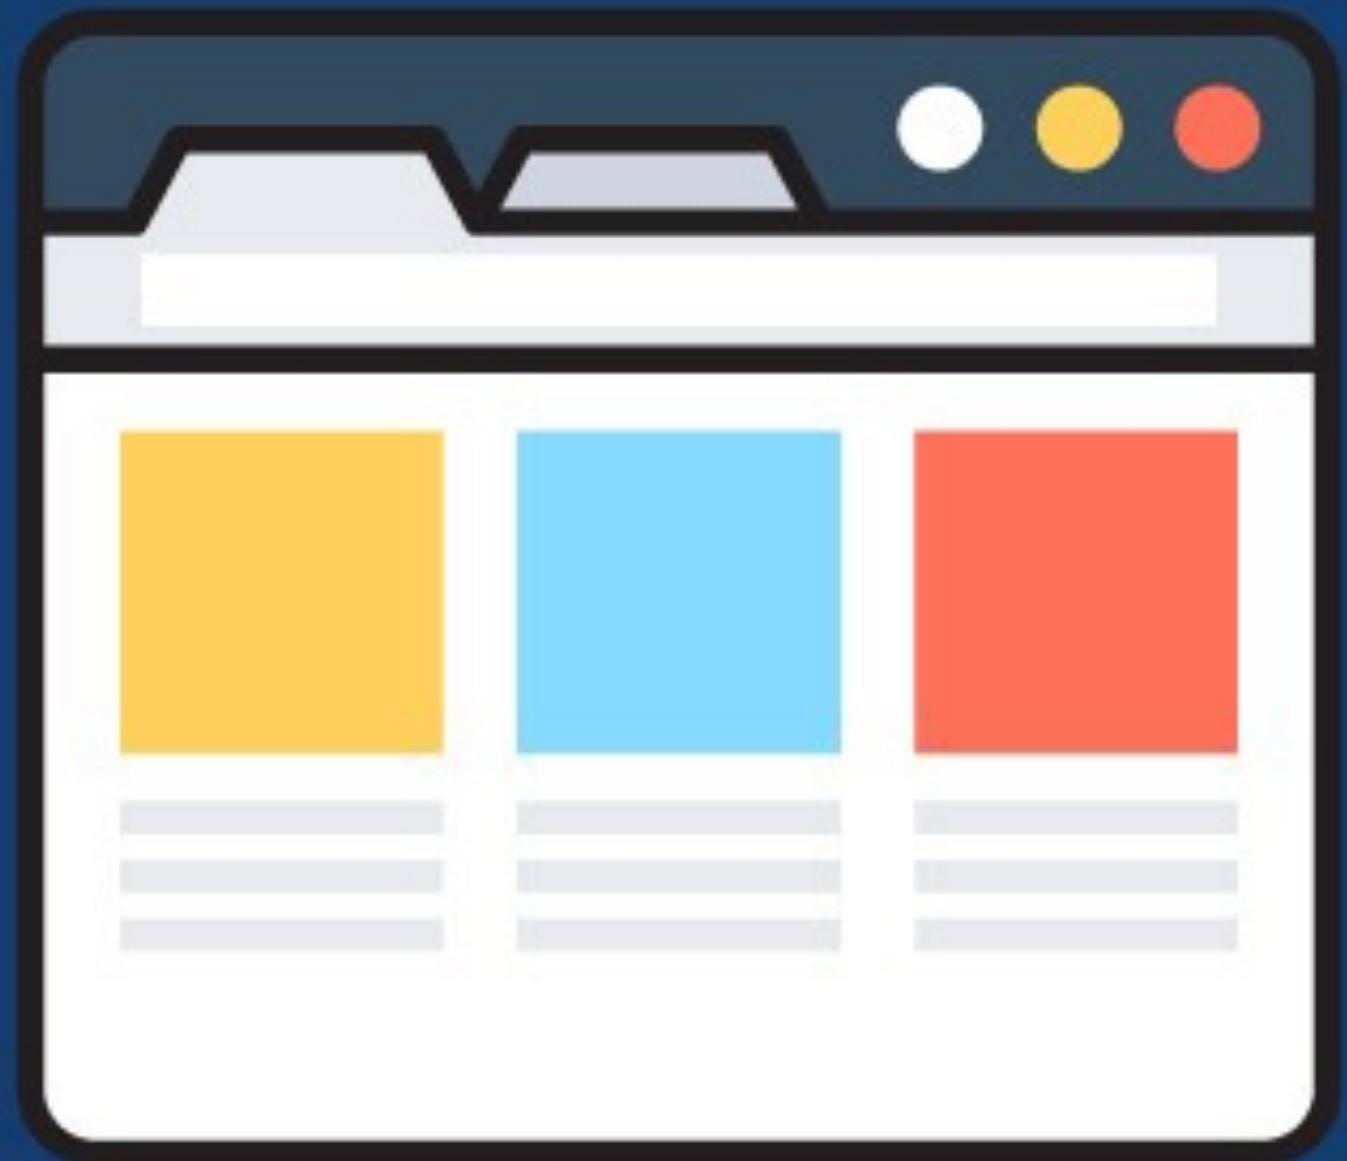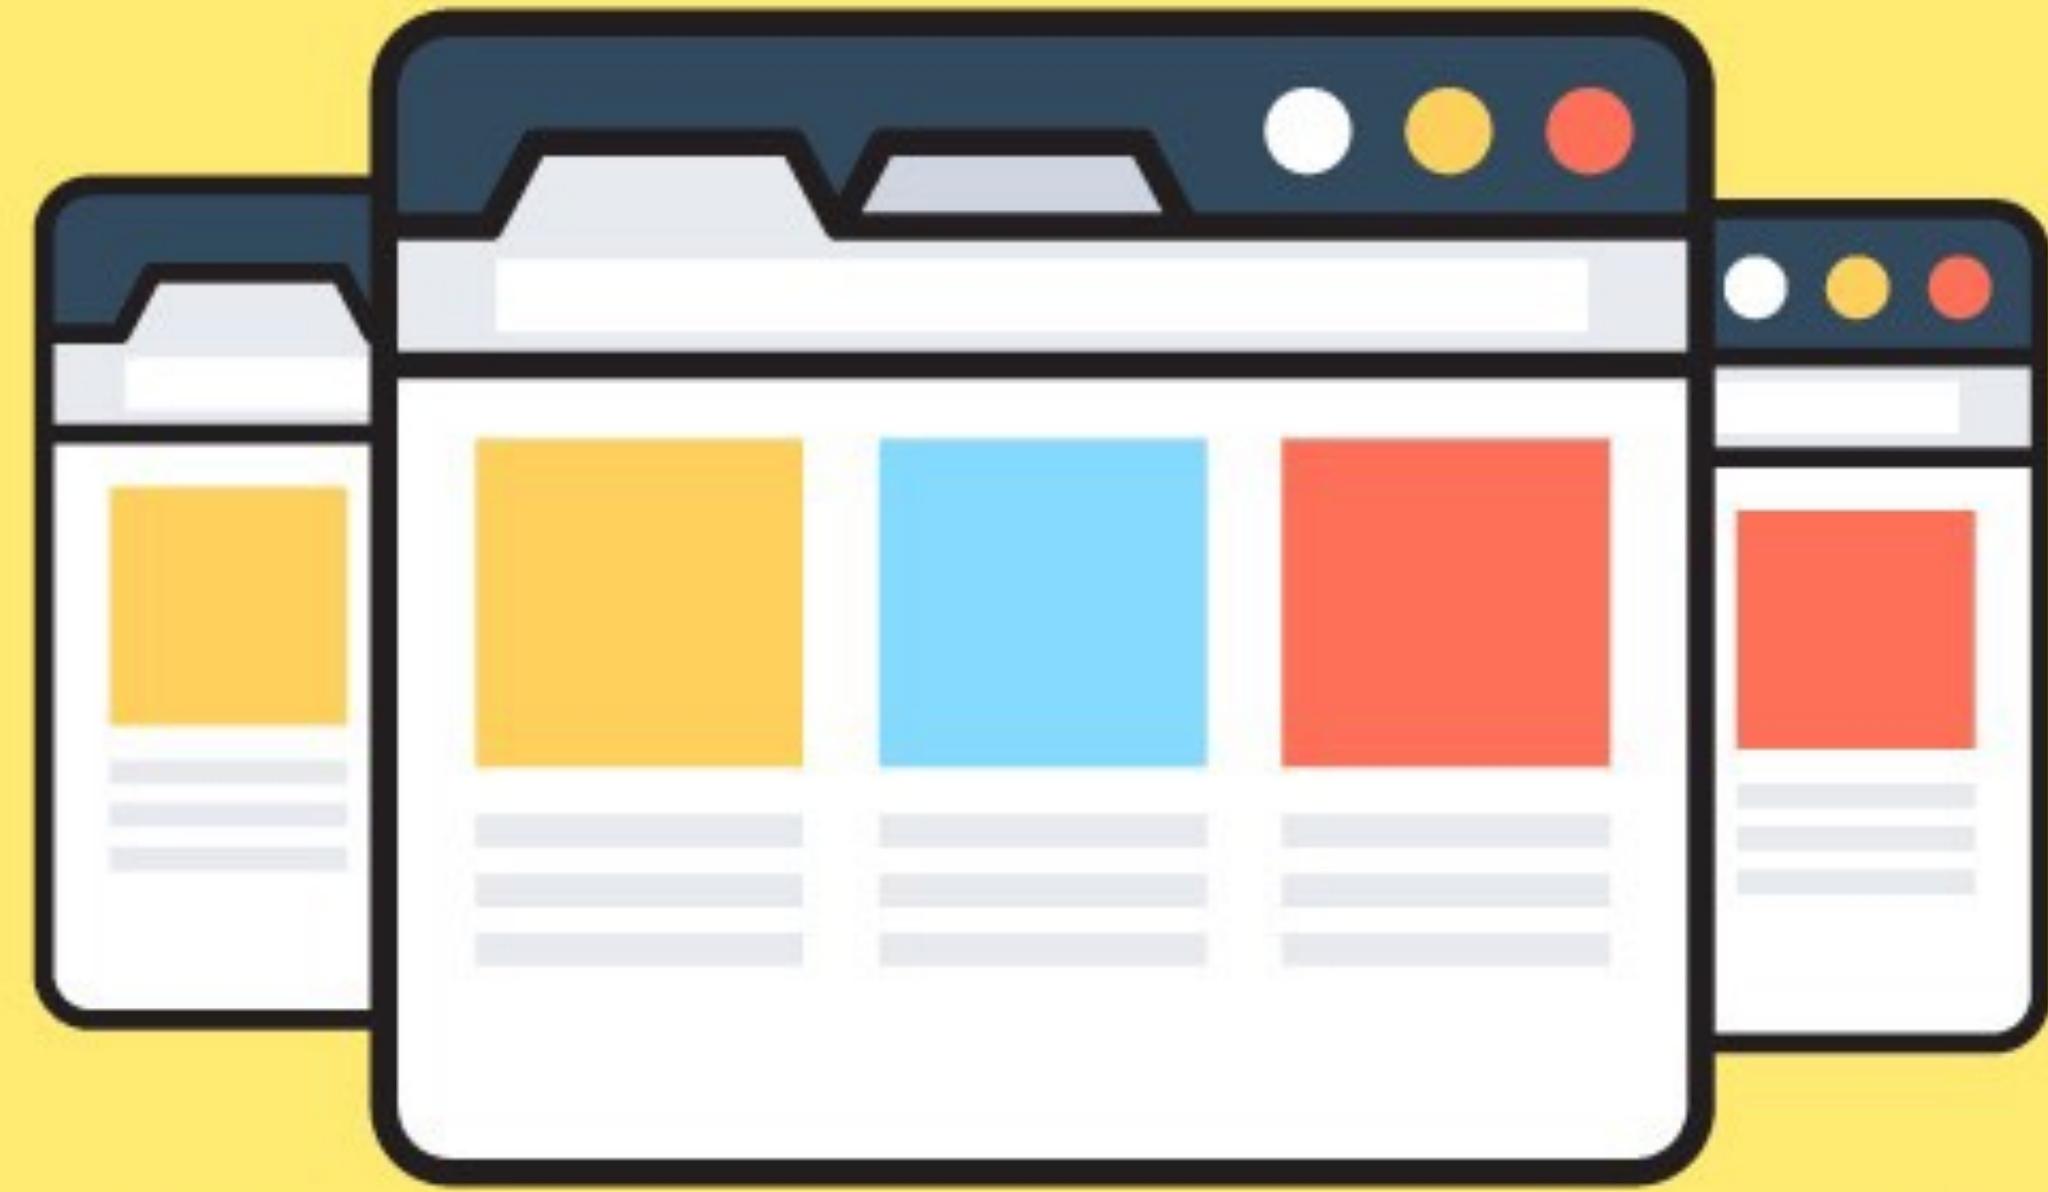

SINGLE PAGE APPLICATION


VS

SPA

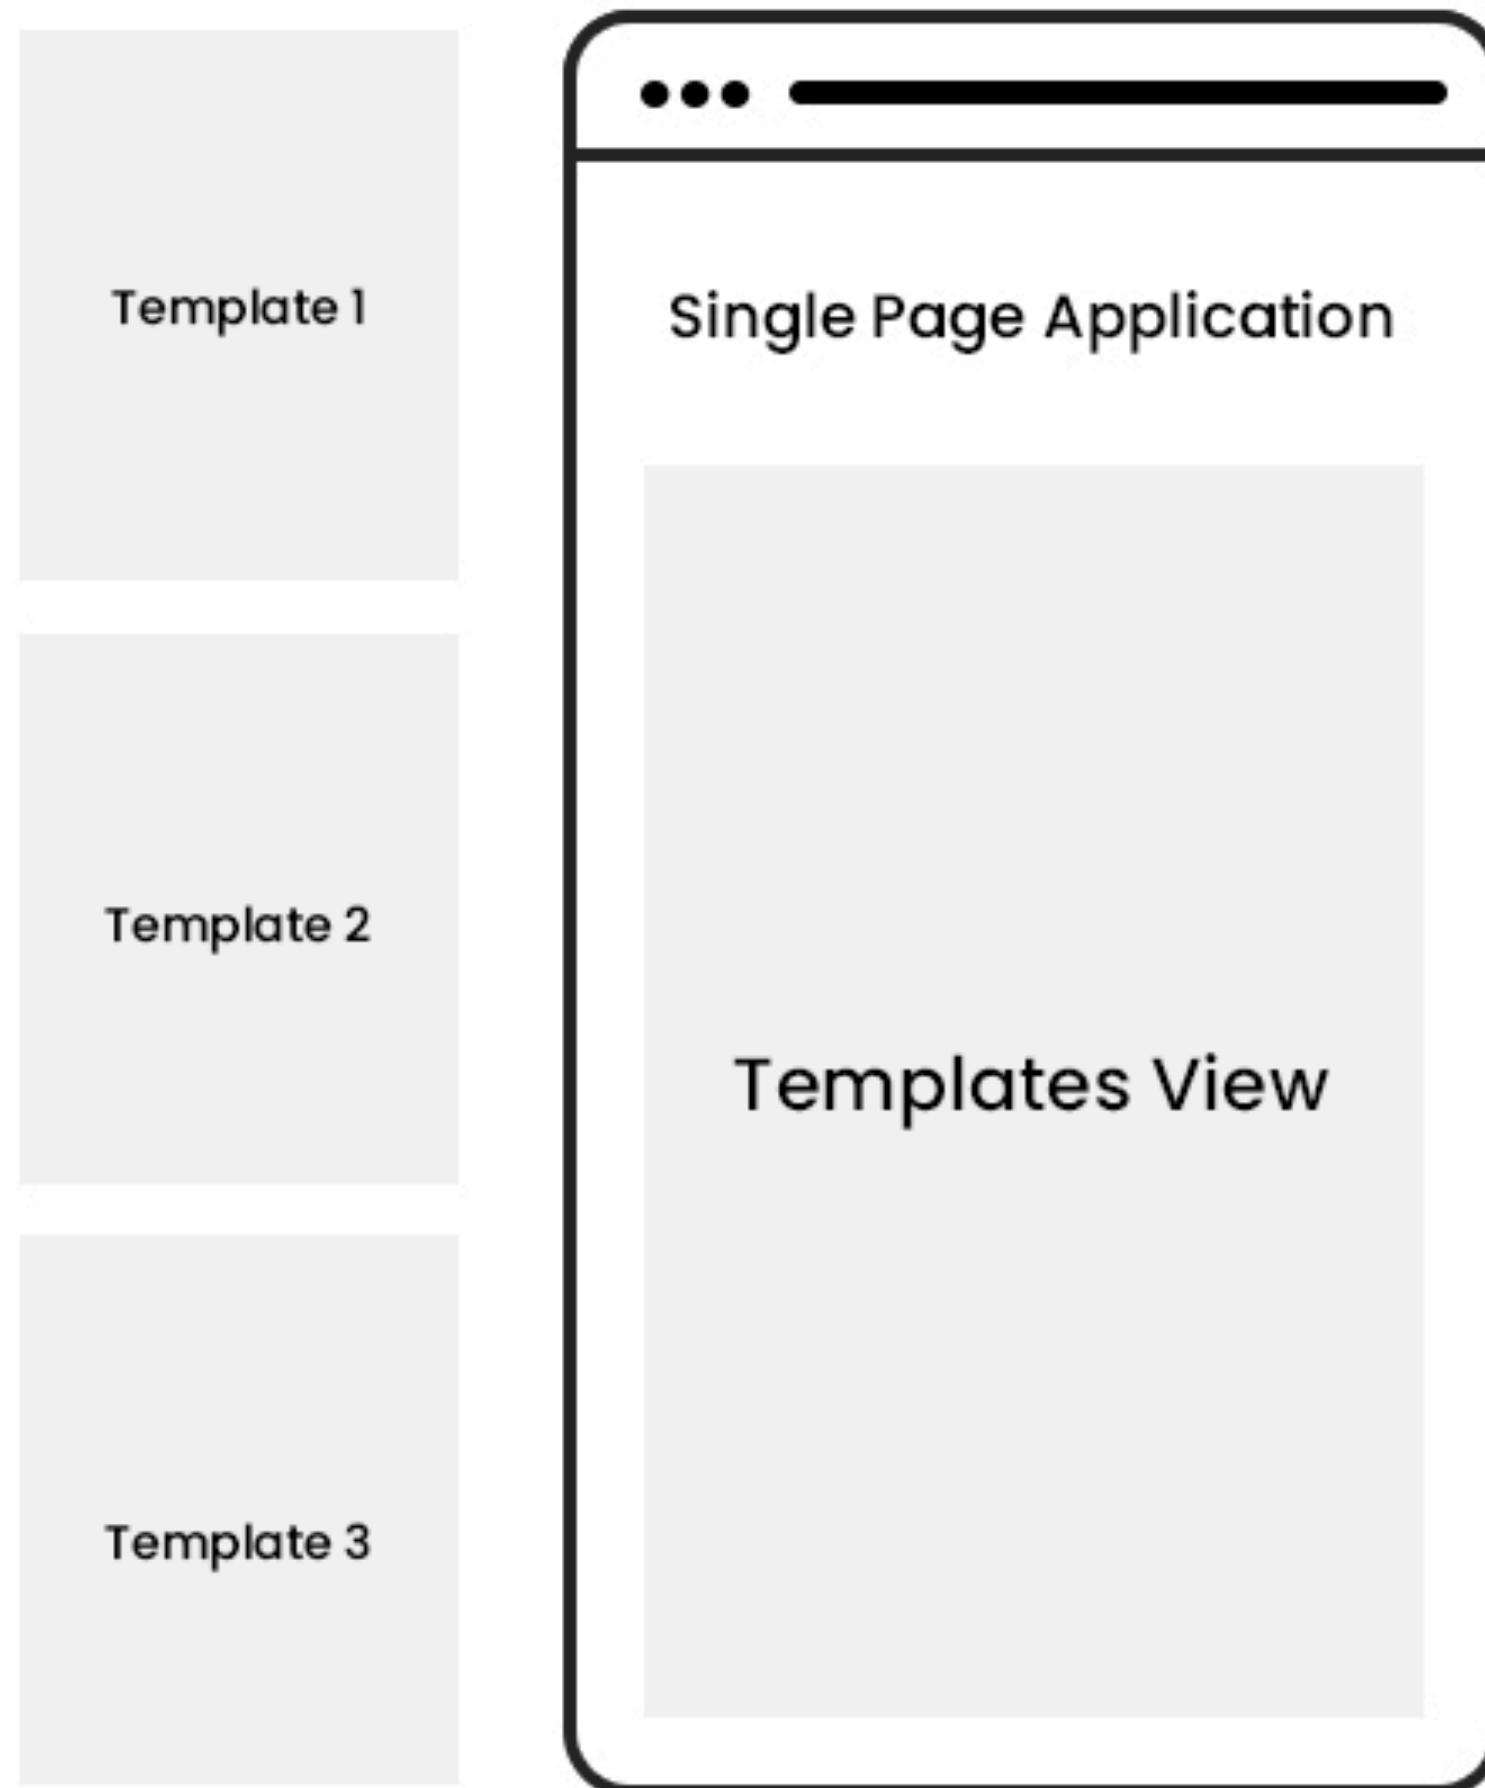

No page refresh on request


MPA

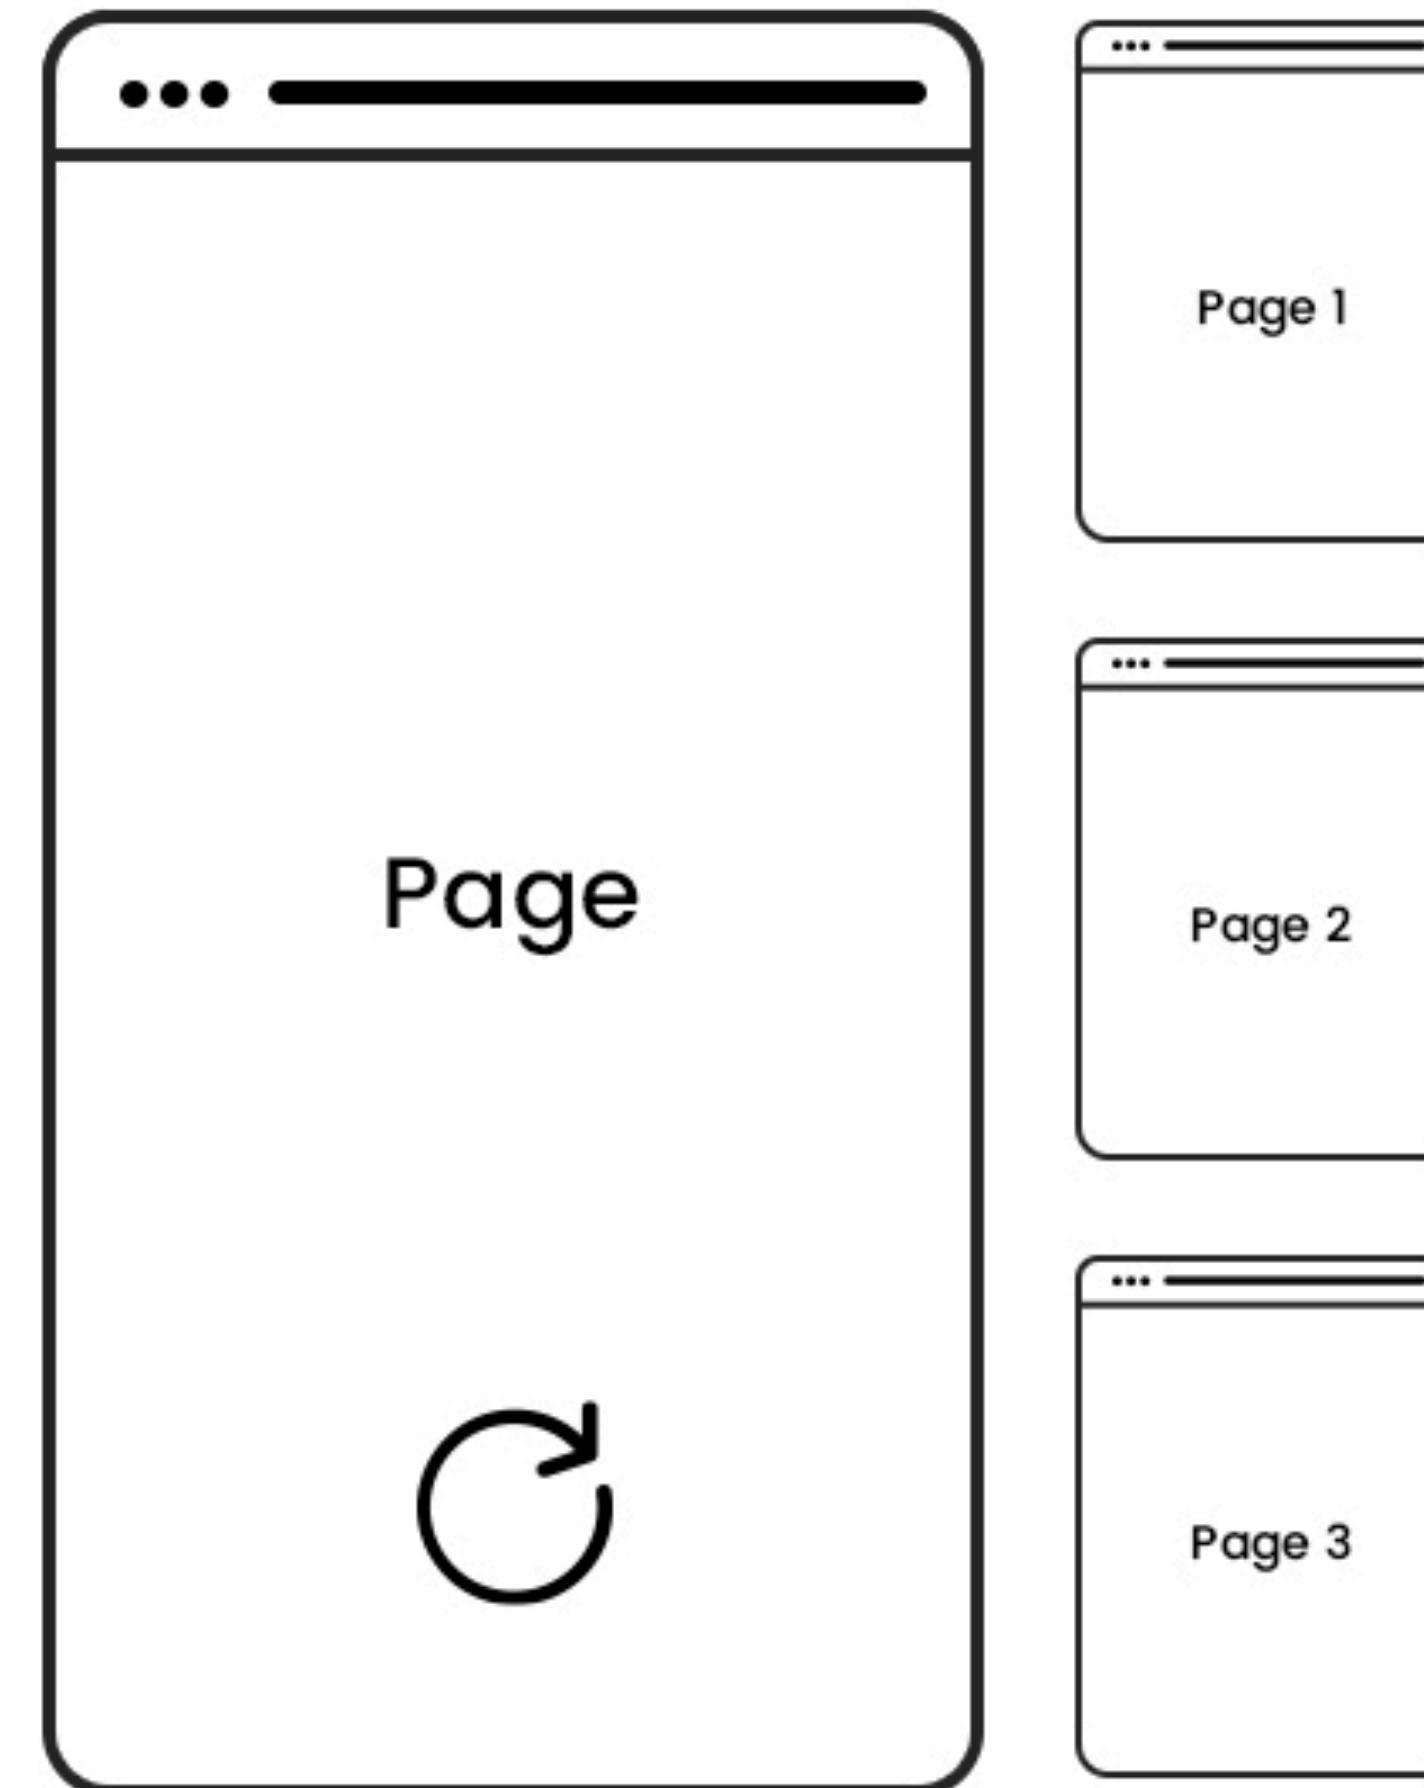


Whole page refresh on request

MPA VS SPA


Traditional Page Lifecycle

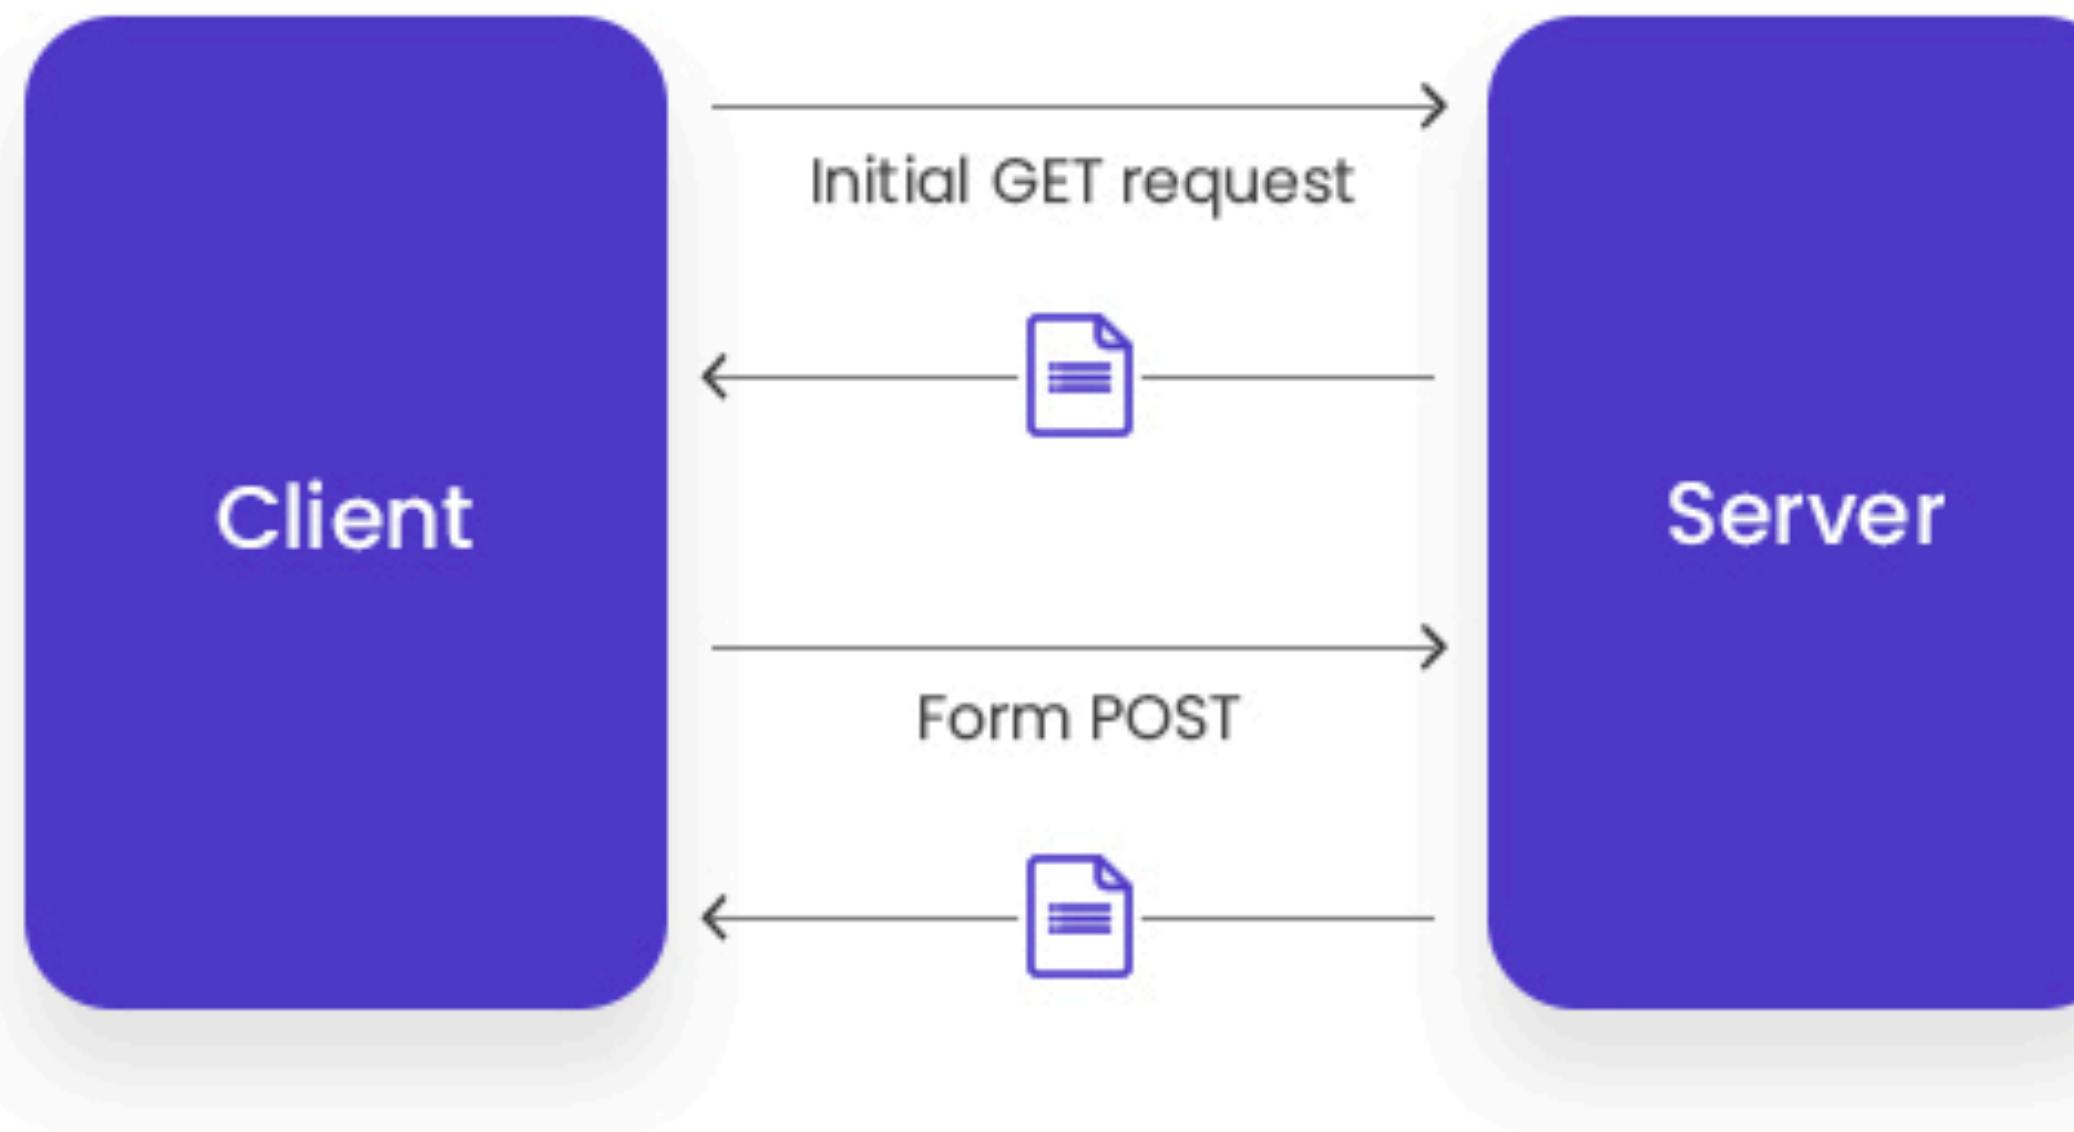

SPA Lifecycle

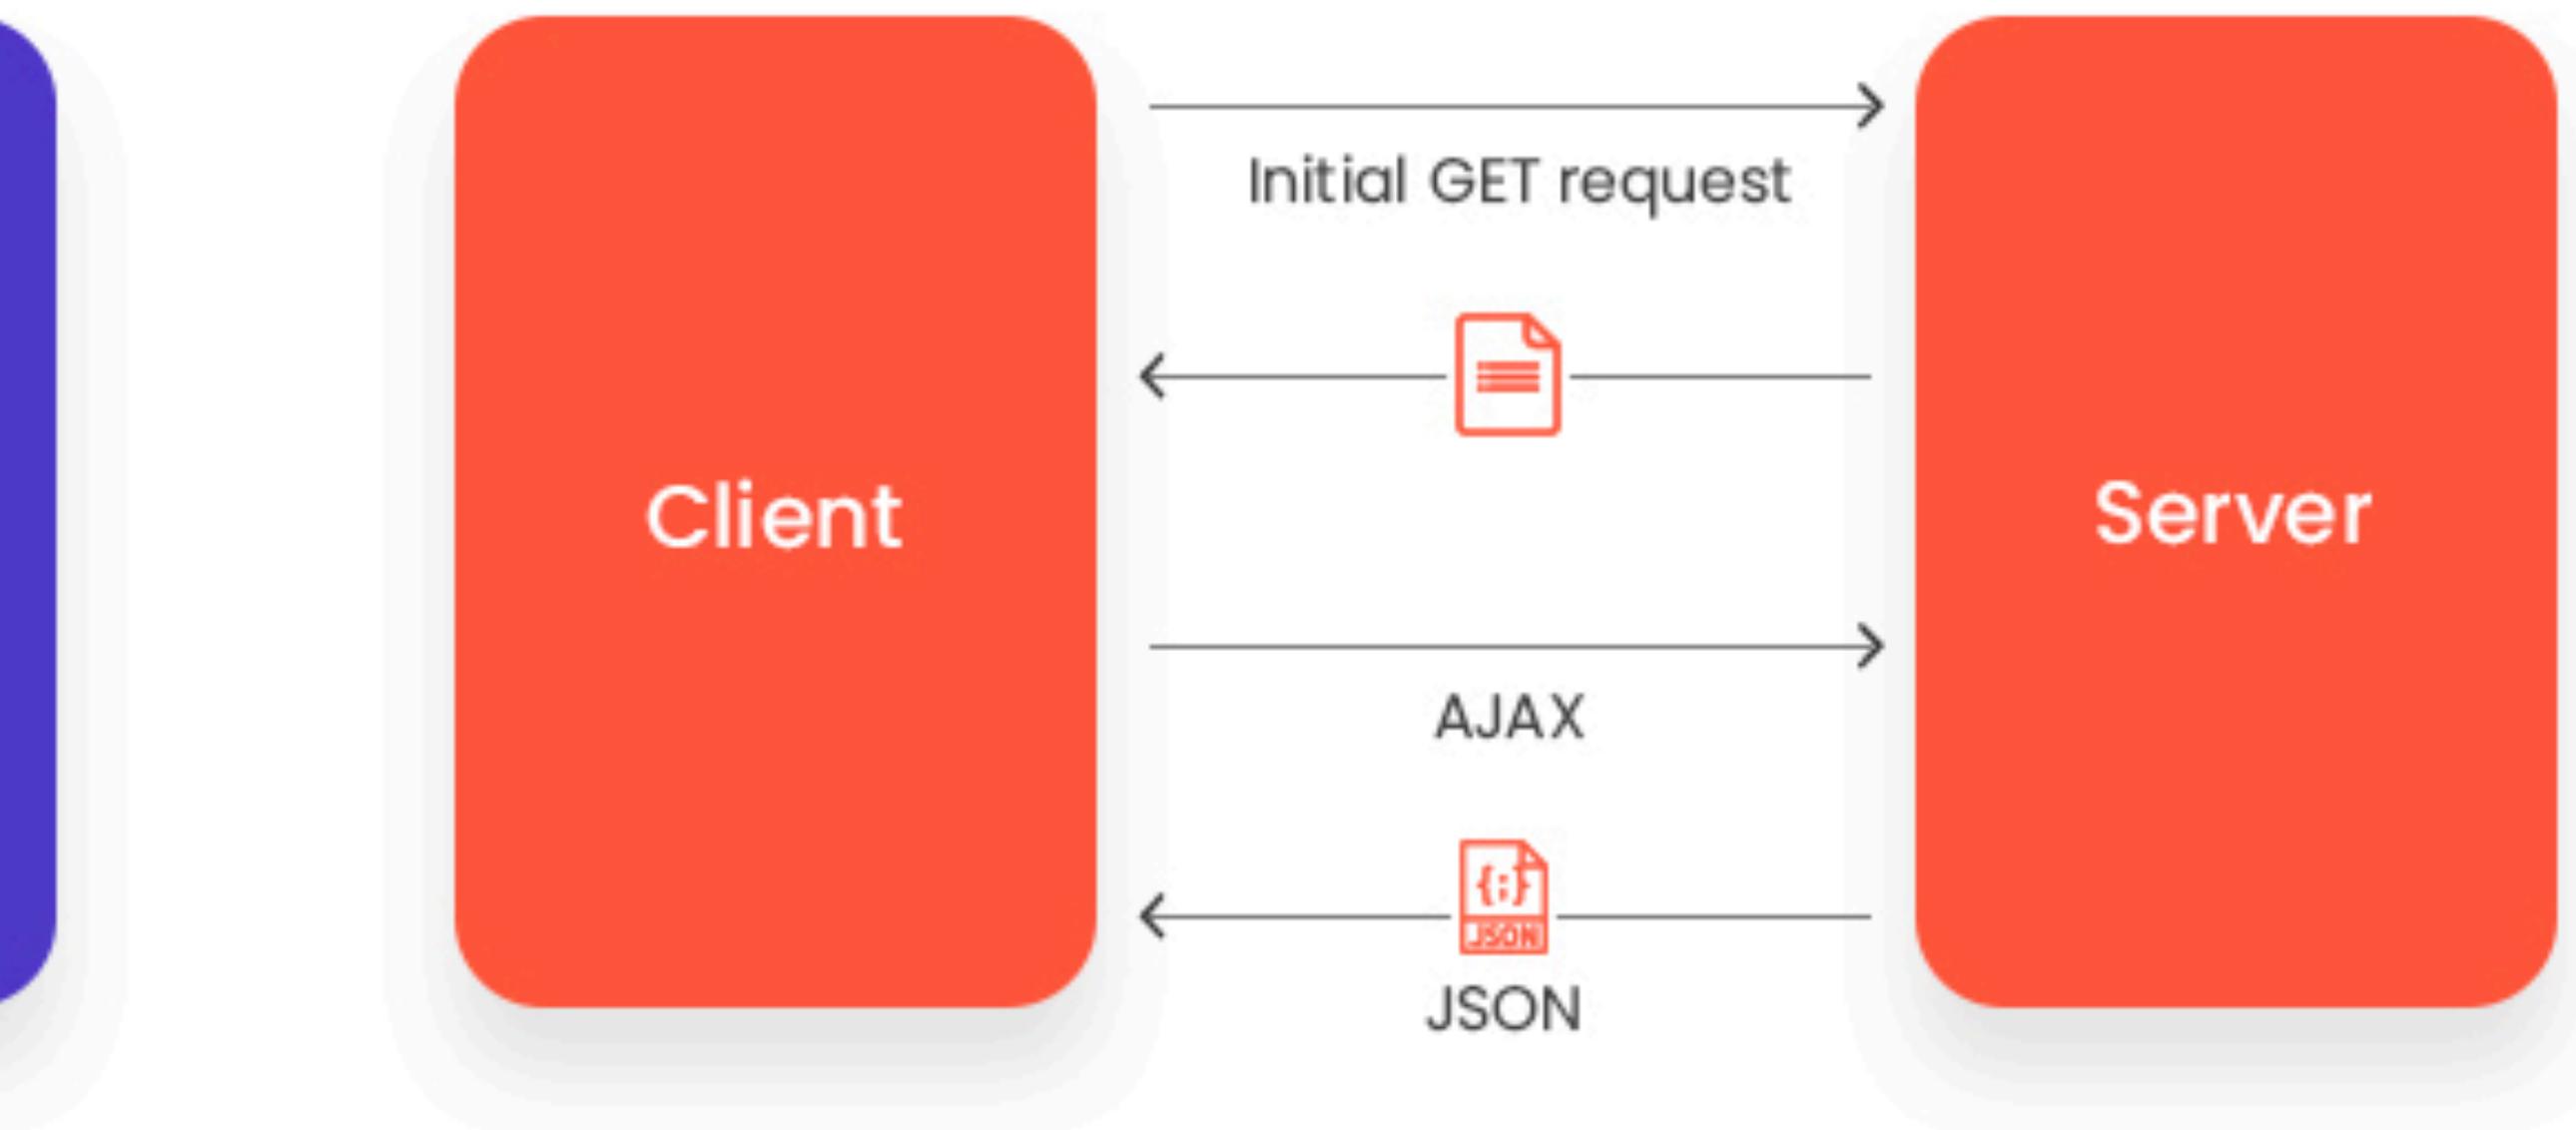

SPA - CLIENT SERVER

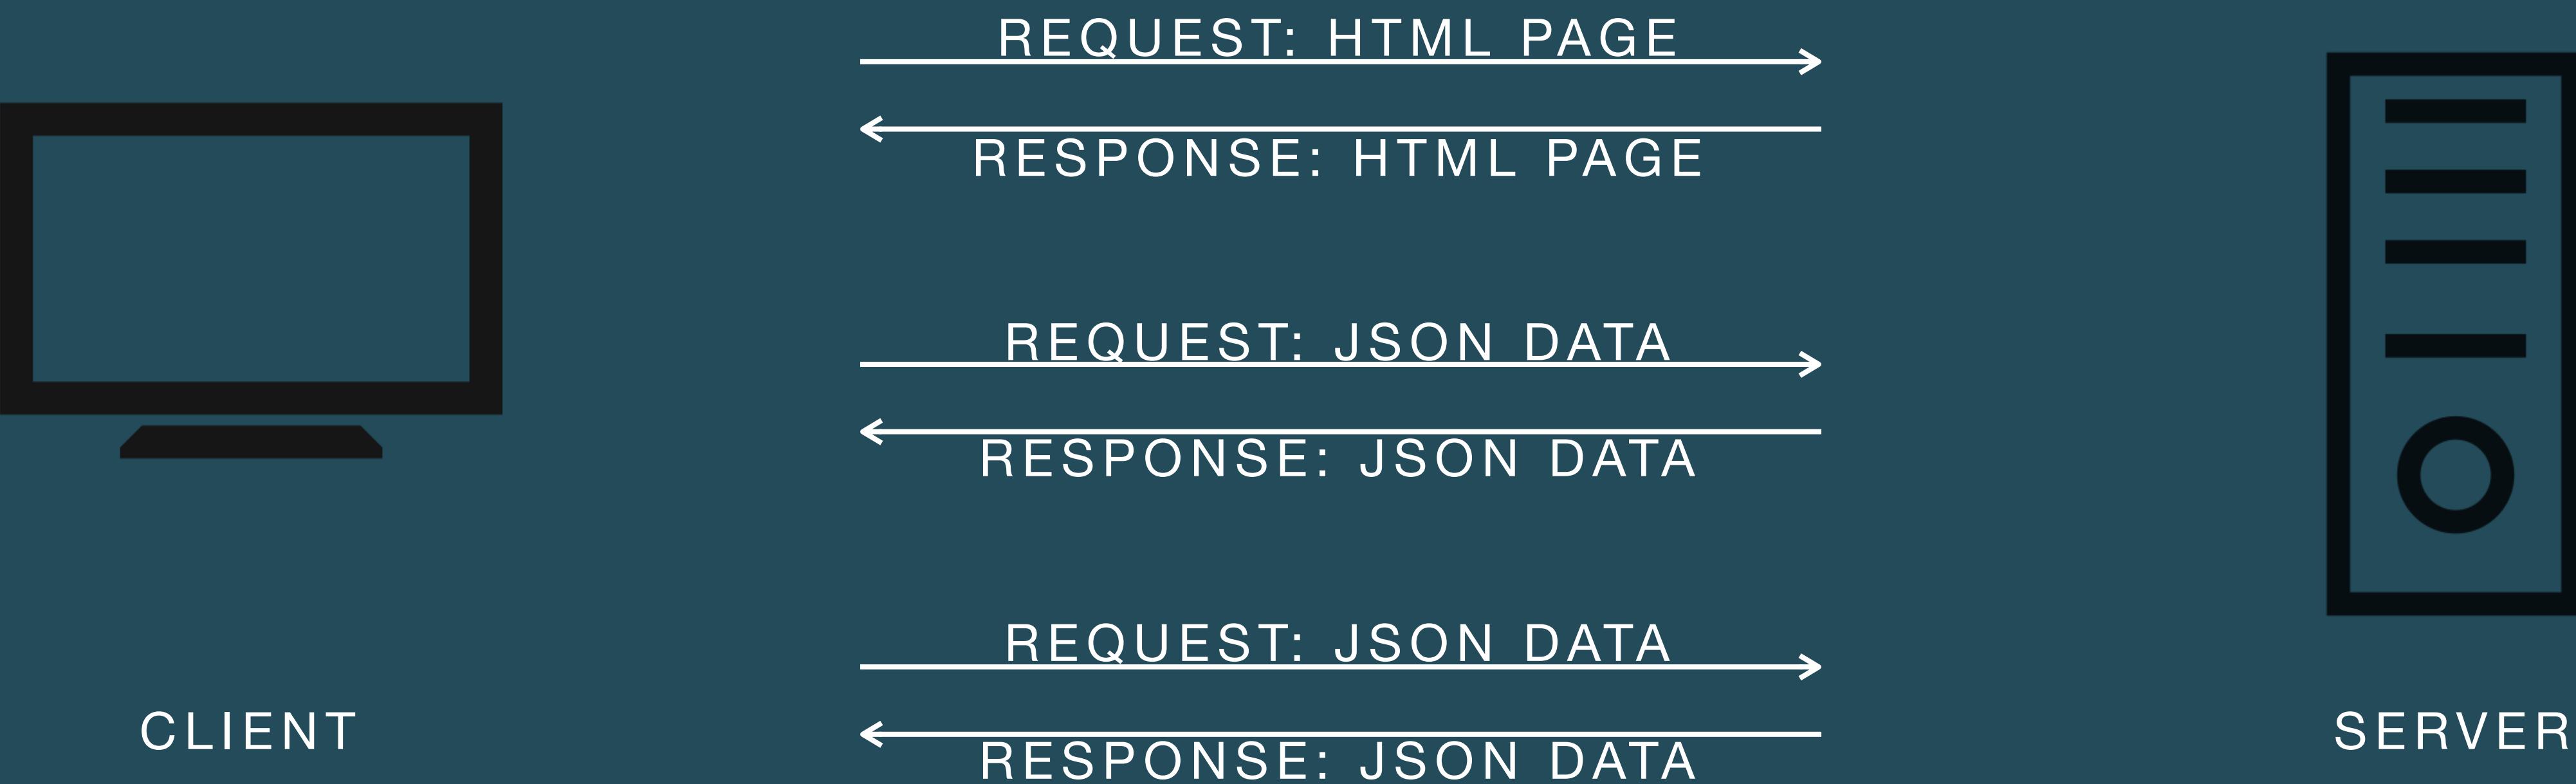

The Architecture

Initial request

Traditional

Single Page
Application

The Architecture

Request a new page




Traditional

Single Page
Application

<https://www.bloomreach.com/en/blog/2018/what-is-a-single-page-application>




MPA

- Every request for new information gives you a new version of the whole page.
- We have to load it all over again every time we want to change data and get new data.
- The browser has to render the page again.




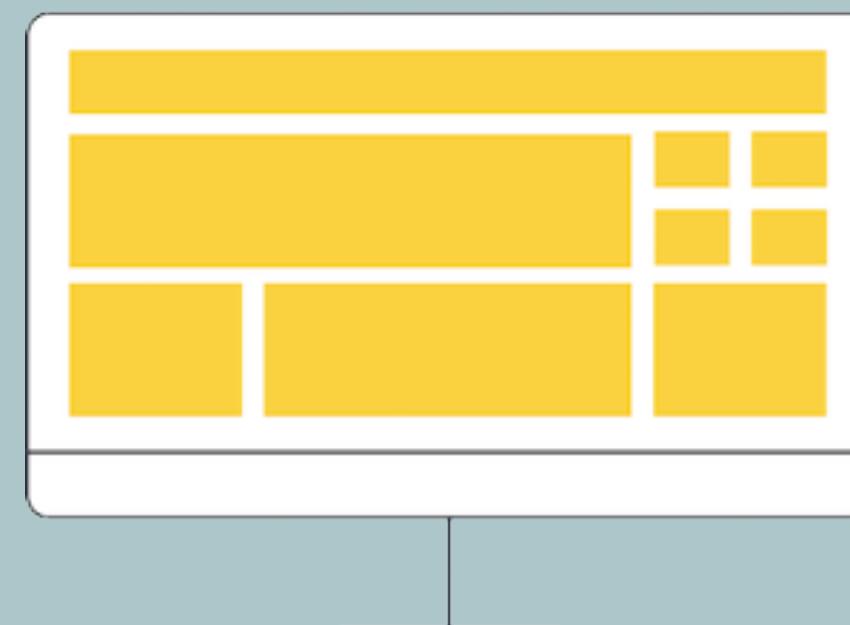
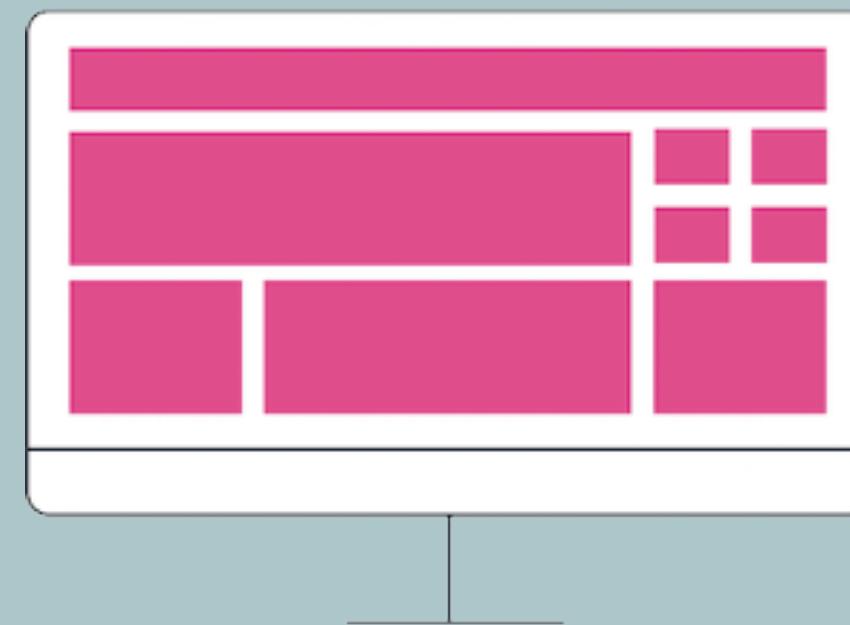
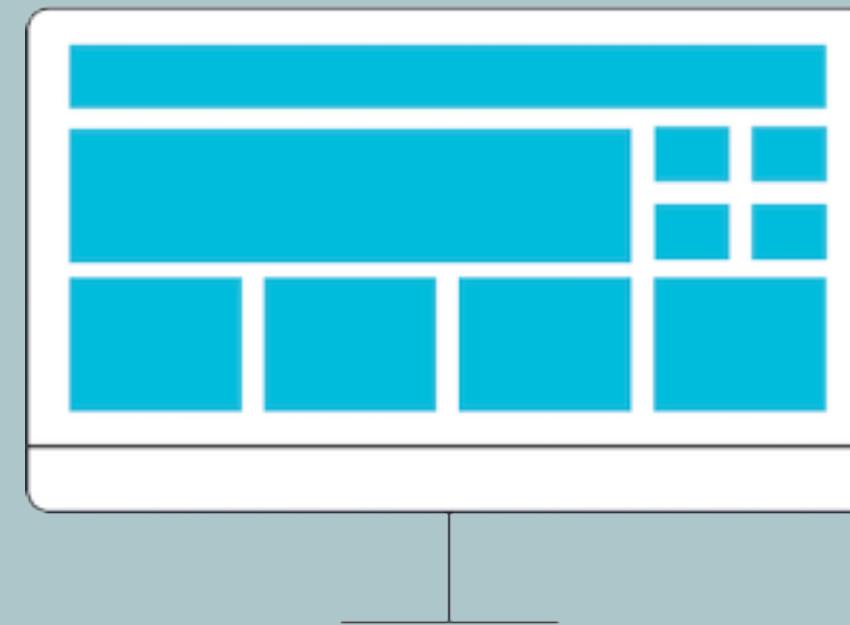


SPA

- We only request and load the data we want.
- No page reload/ refresh.
- Client-side & JavaScript.
- Less server work is required.
- Advanced UI & Animations on page change.
- Better performance.

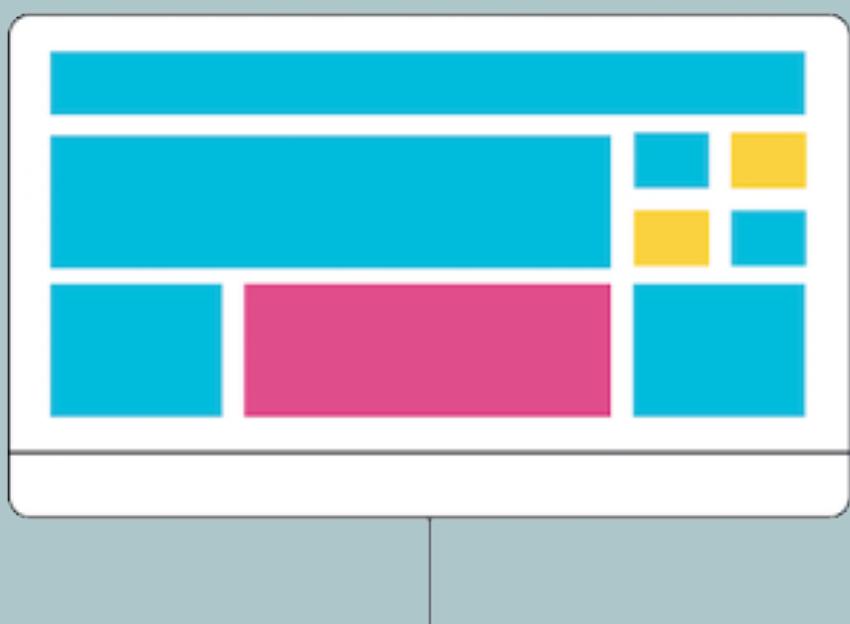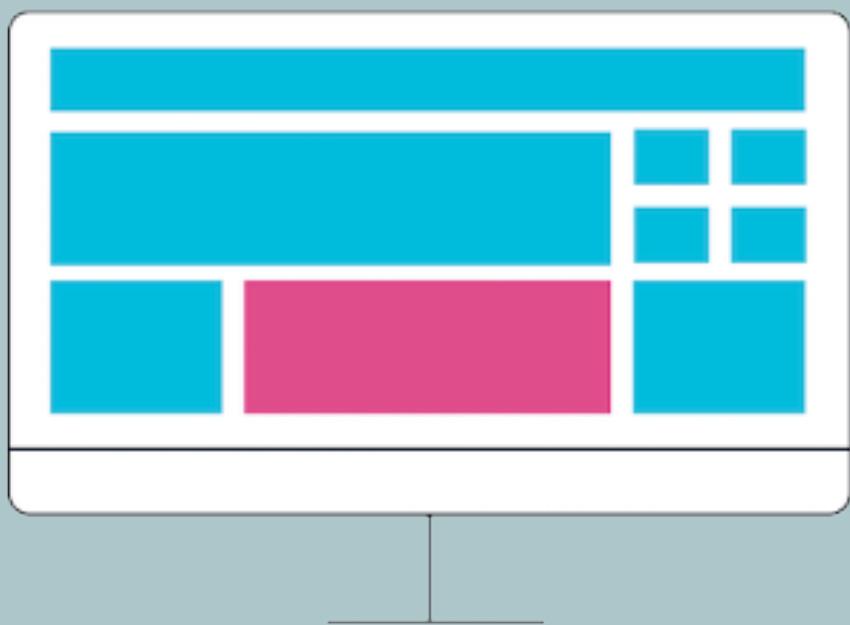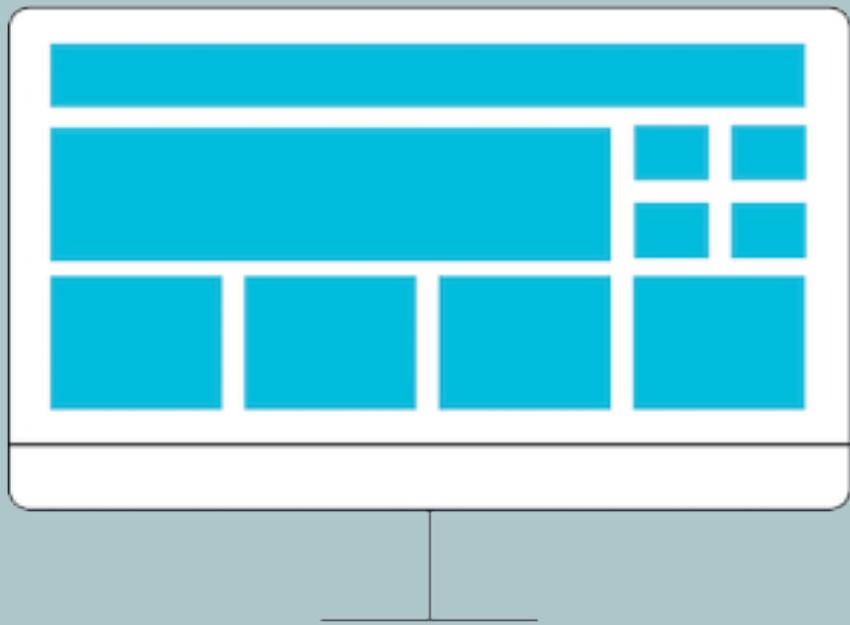

MPA VS SPA

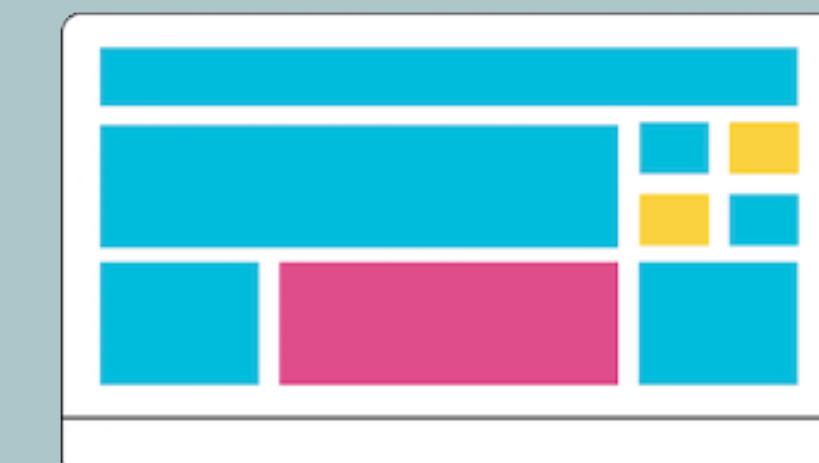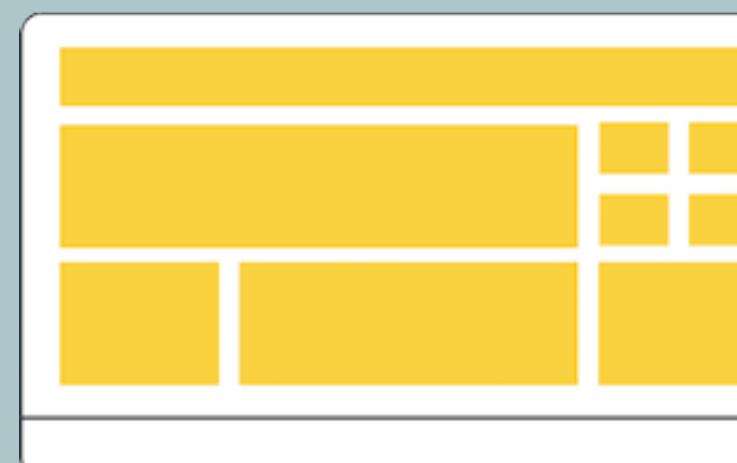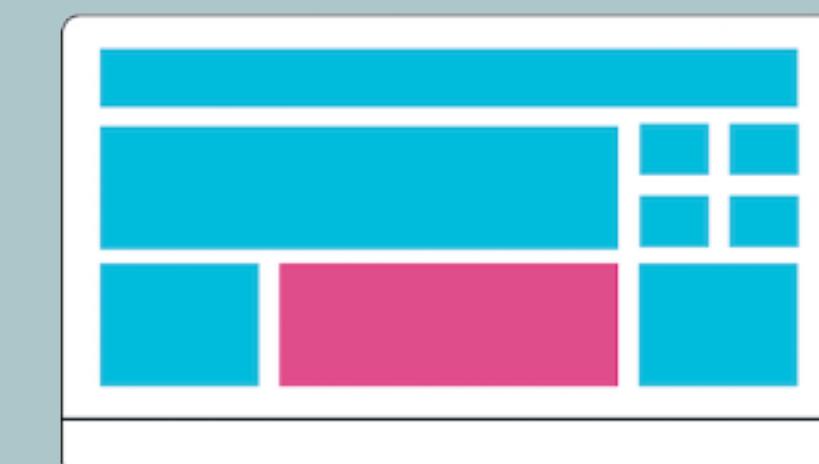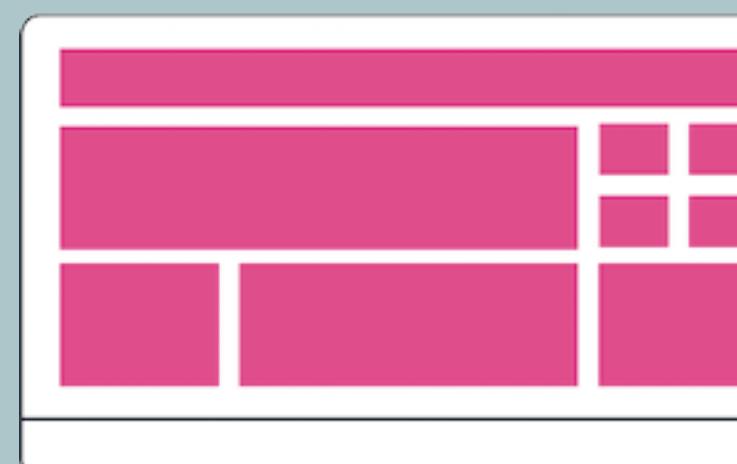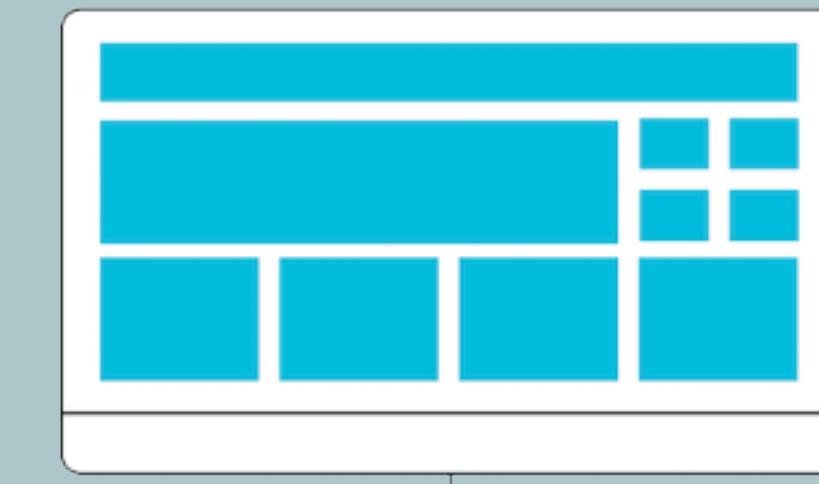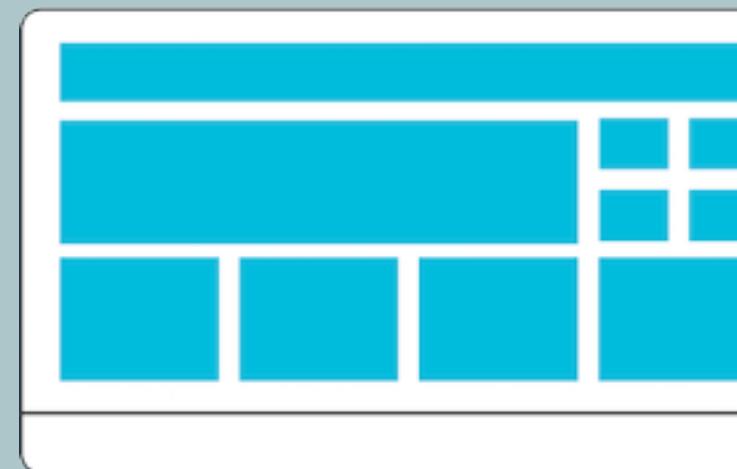

SPA's



Instagram

- Home
- Search
- Explore
- Messages (4)
- Notifications
- Create
- Profile
- More

forgoodcode

ABI Bouhmaida @forgoodcode

1. Communication:

- Listen without interrupting
- Speak with a positive tone
- Pay attention to your body language.

Liked by chrisostomusgalangg and others

forgoodcode 9 soft skills to fast-track your career....

View all 30 comments

2 DAYS AGO

Rasmus Cederdorff (cederdorff)

Switch

Suggestions for you

dj_luckystars New to Instagram

violeta.barbuta


cederdorff Edit Profile

182 posts 5,390 followers 673 following

Rasmus Cederdorff Senior Lecturer @keacph Web App Developer Alicia & Ida Denmark cederdorff.com

AMSTERD... LONDON 22 Karla & Pi... @villacph IDA 5 YEA... @AAJKJR

POSTS SAVED TAGGED

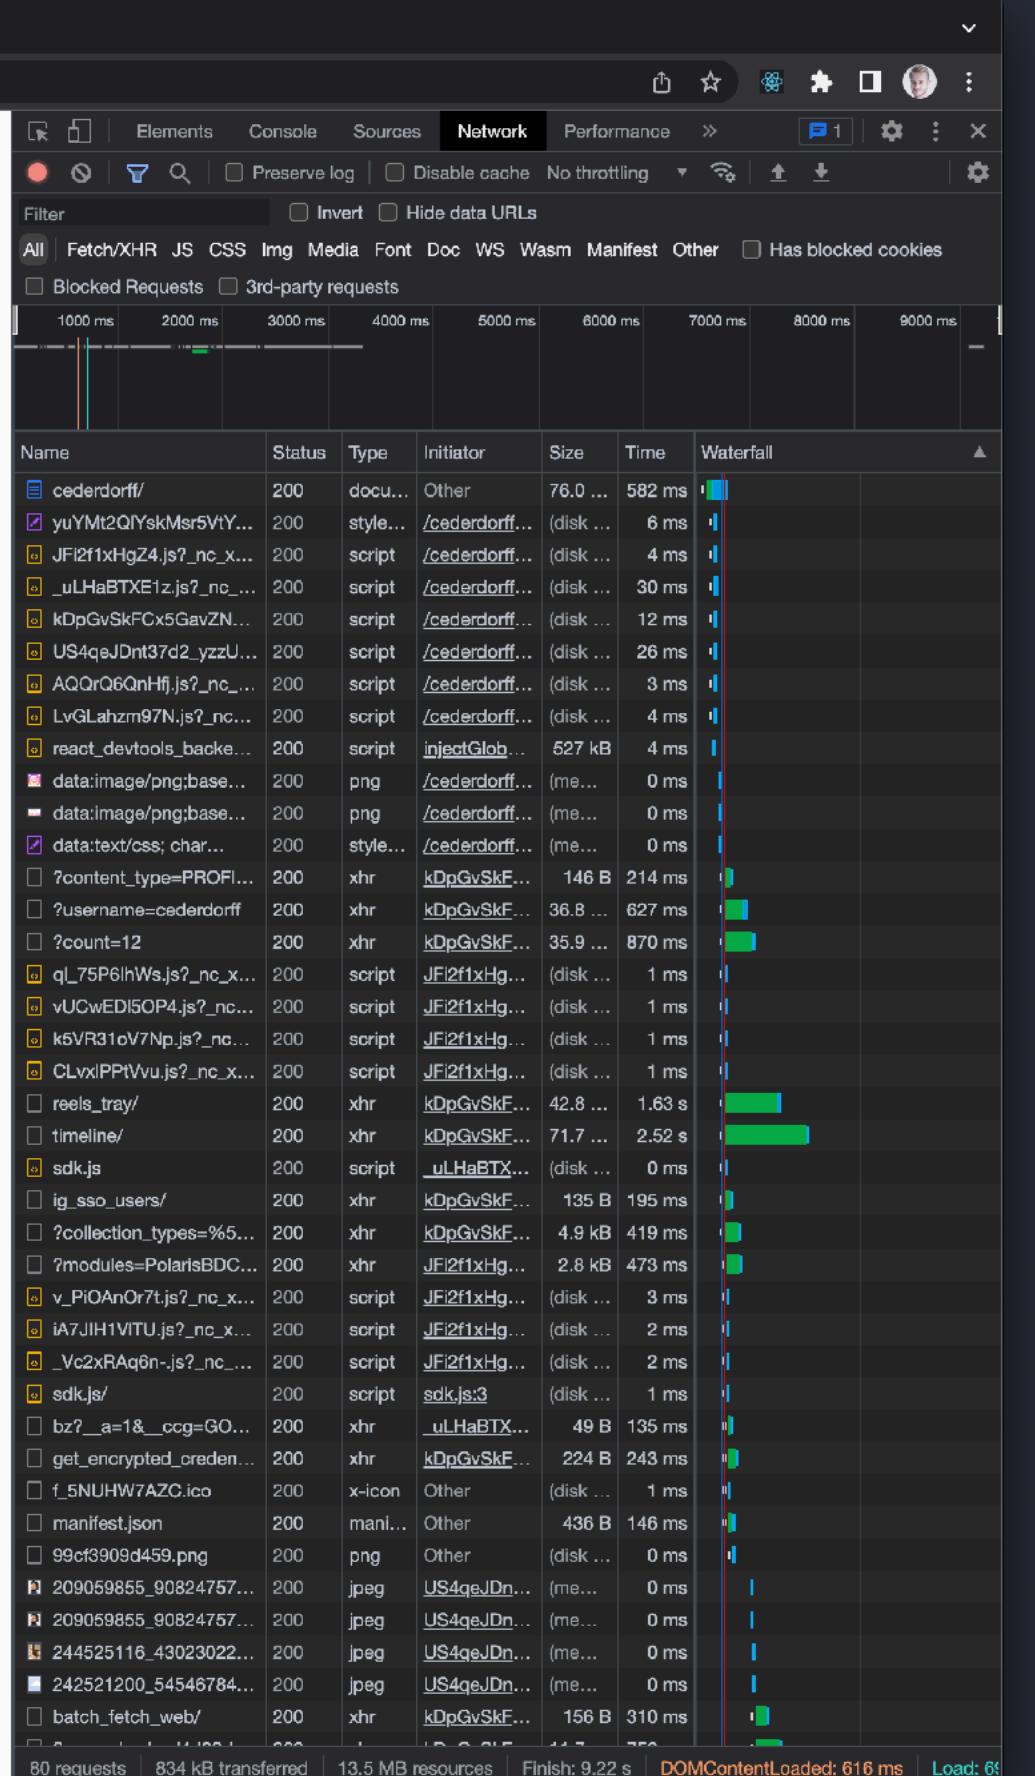

A close-up photograph of a person's hands interacting with a black Wi-Fi router. One hand is holding a blue Ethernet cable and is in the process of plugging it into one of the four gold-colored ports on the front panel of the router. The router has three external black antennas. The background is blurred.

What's a Router?

What's a Router?

“It is the piece of software in charge to organize the states of the application, switching between different views.”

It's a key component in Single Page Applications.

SPA & Router

In a SPA the router is in charge of displaying the right view by watching changes on the URL.


The router makes it look like the web app has multiple pages and HTML files. But it's just changing the view of what is displayed inside the single `index.html` file. The page transition and change of content are done dynamically by JavaScript.

https://medium.com/@fro_g/routing-in-javascript-d552ff4d2921



/ create
route


Router
(router.js)

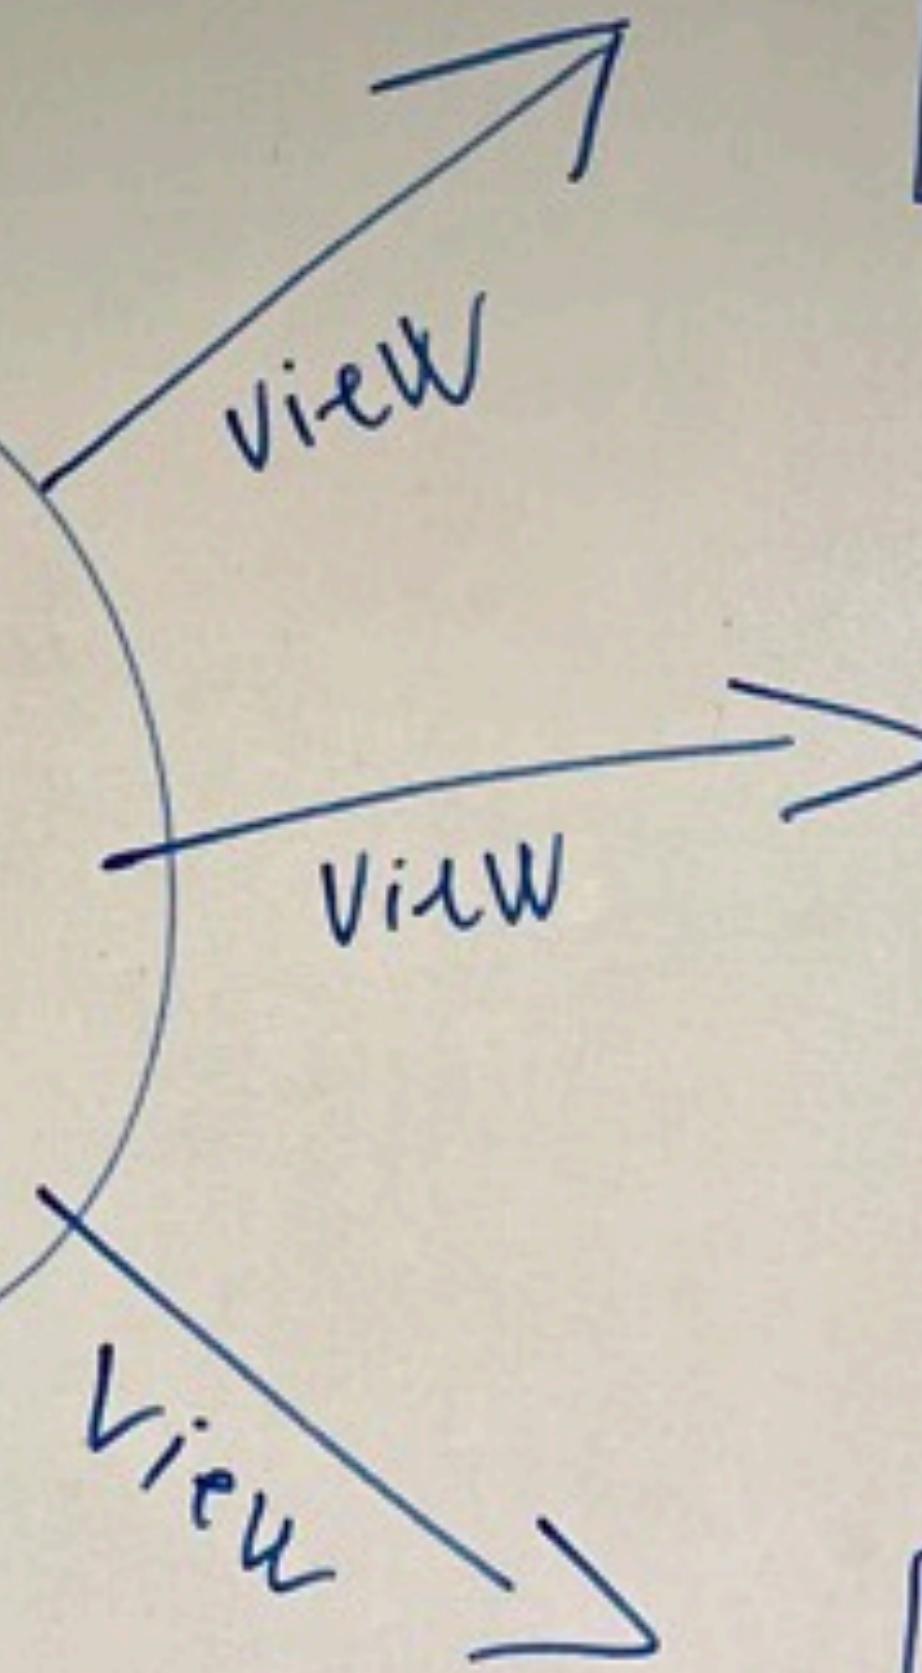

users page

create page

update page

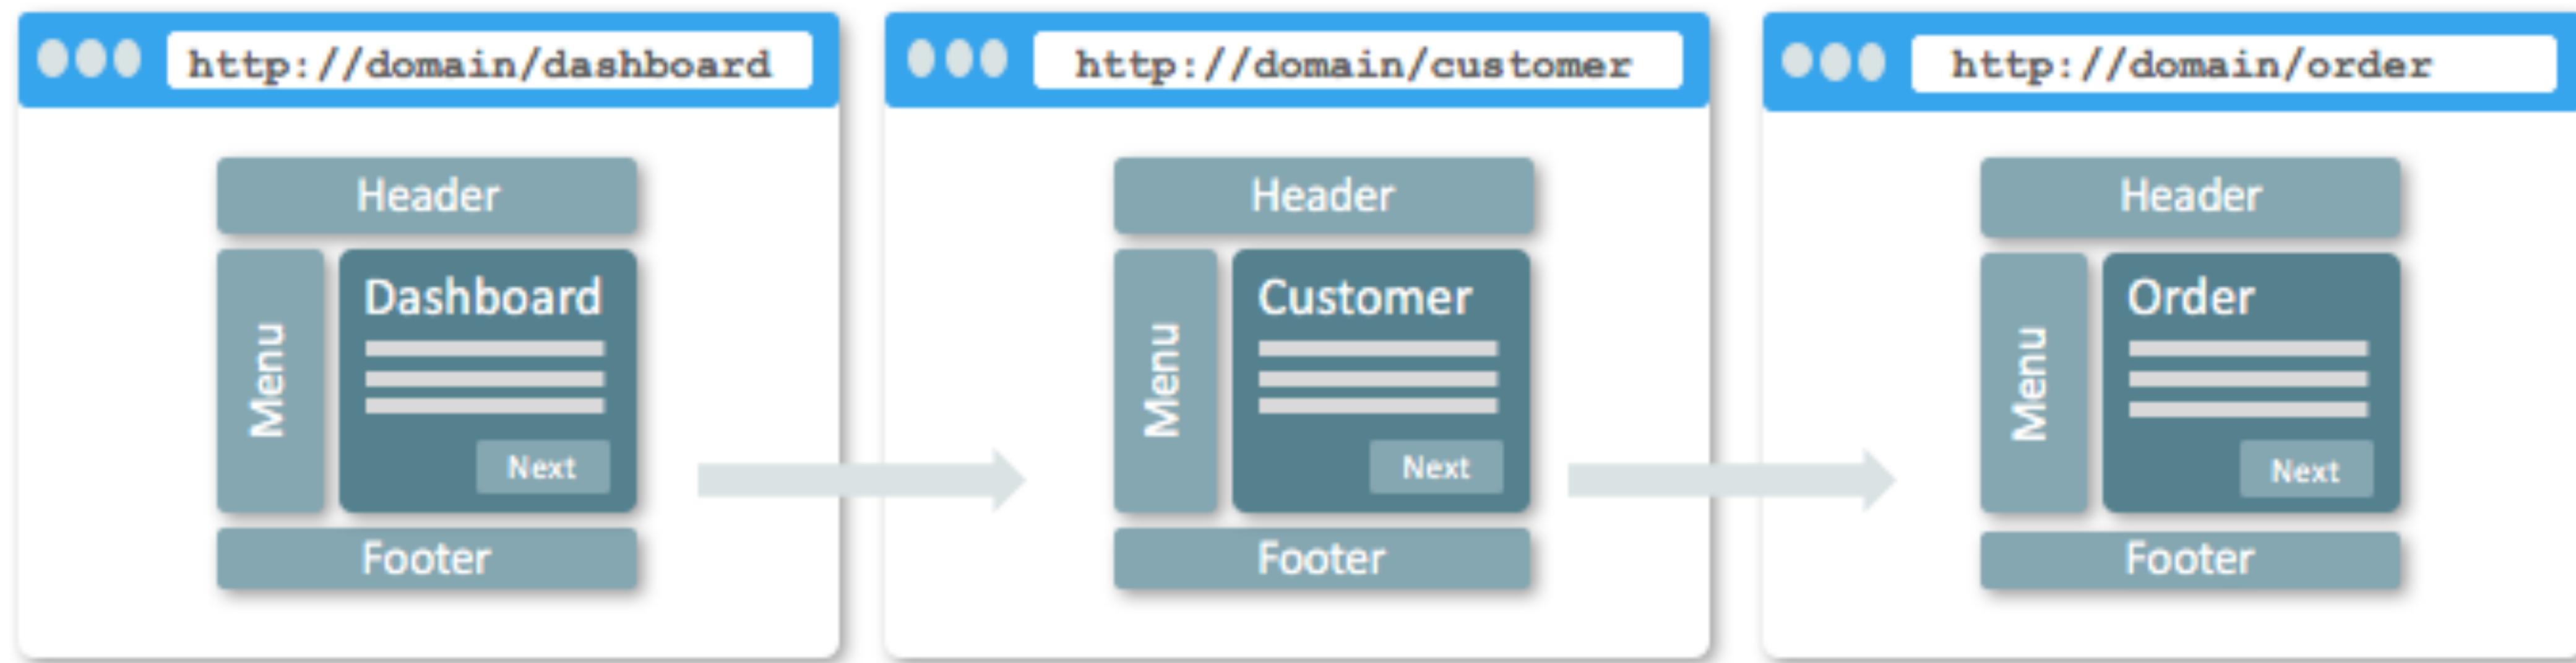

<https://dzone.com/articles/single-page-applications-in-oracle-jet>


React Router

... a client & server-side routing library for React





```
<Routes>
  <Route path="/" element={<HomePage />} />
  <Route path="/about" element={<AboutPage />} />
  <Route path="/contact" element={<ContactPage />} />
  <Route path="*" element={<Navigate to="/" />} />
</Routes>
```

Page Components

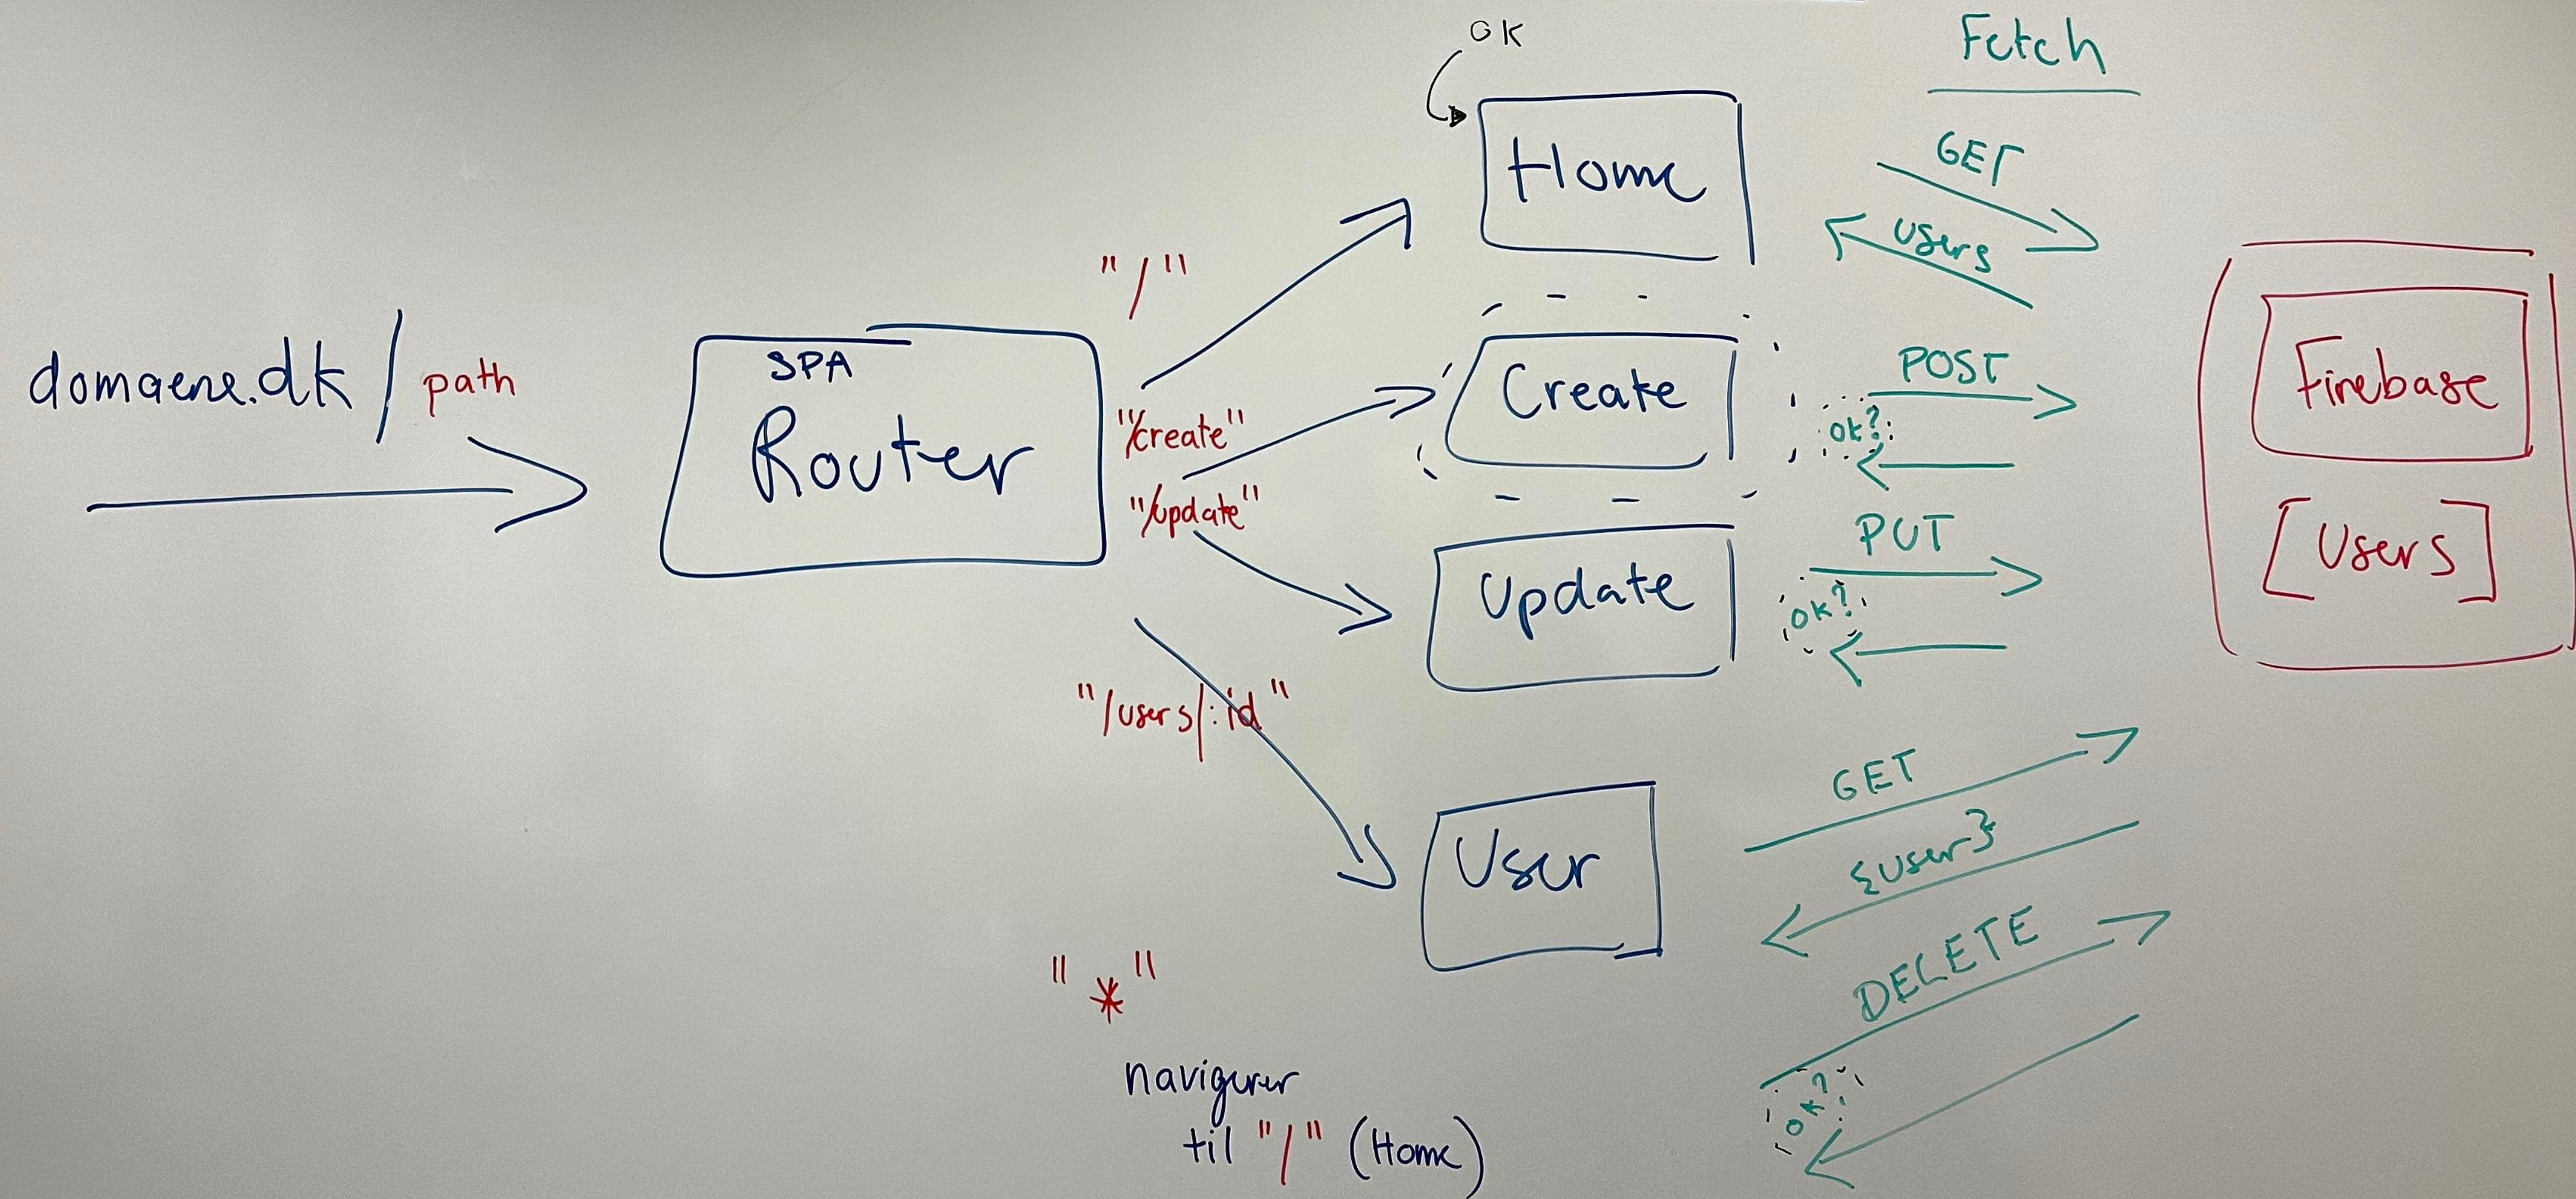


React User CRUD (SPA)

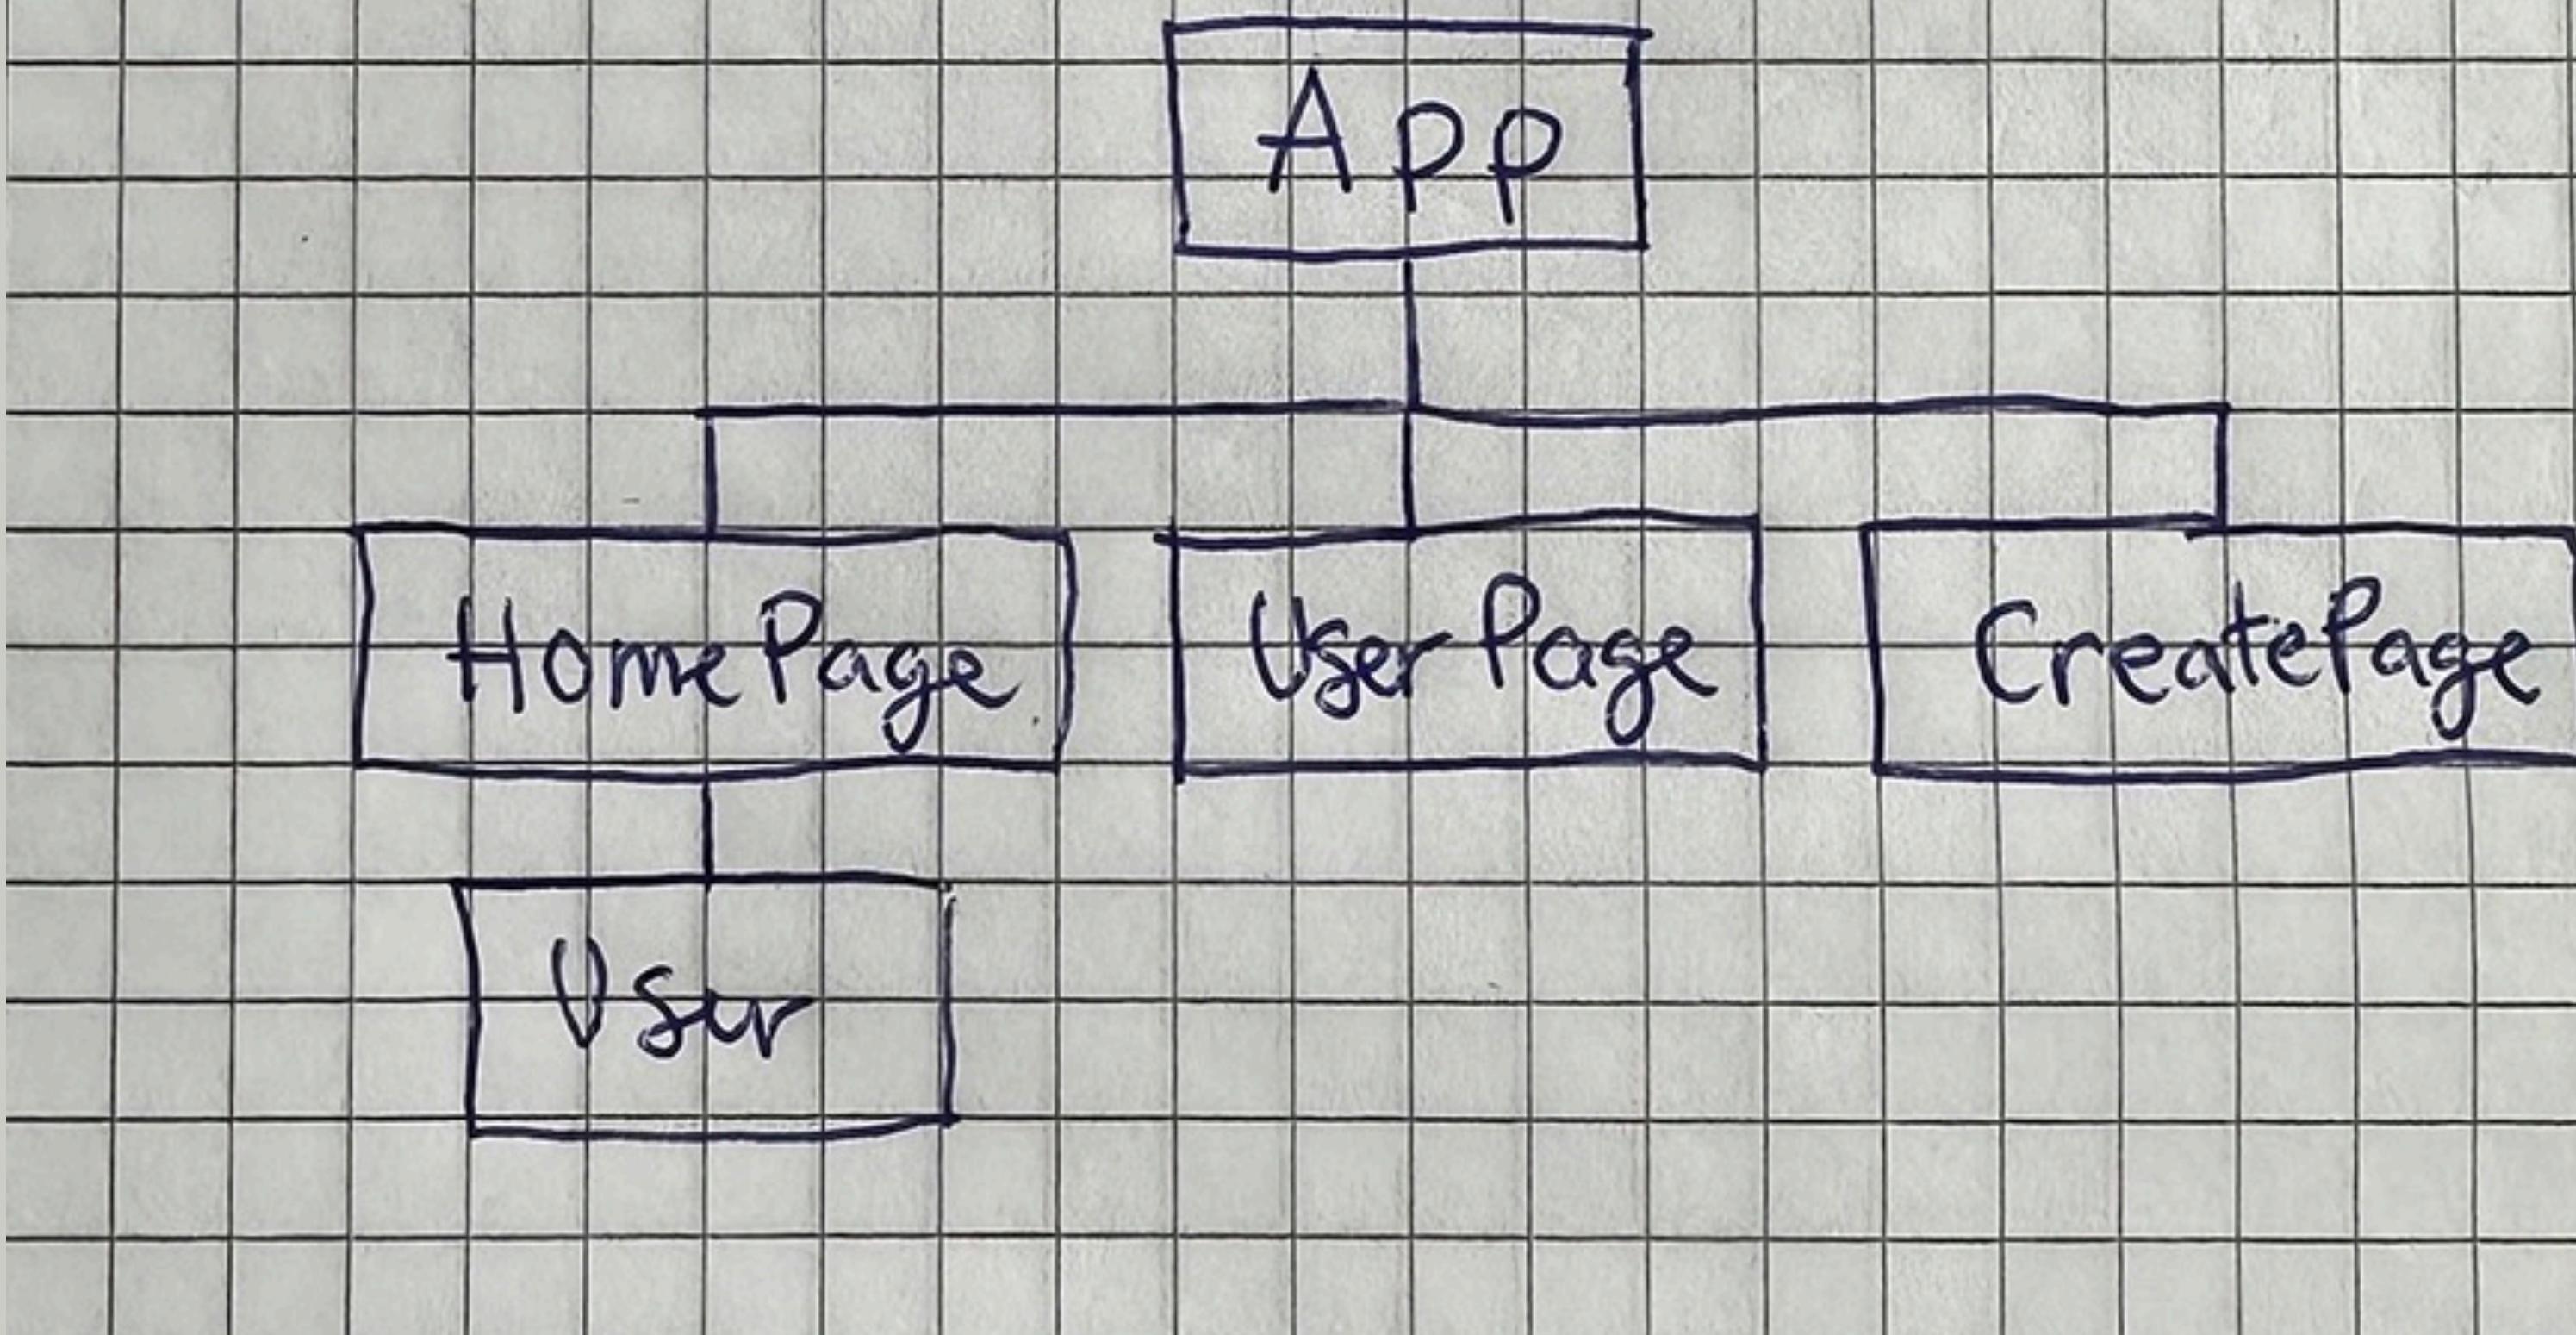

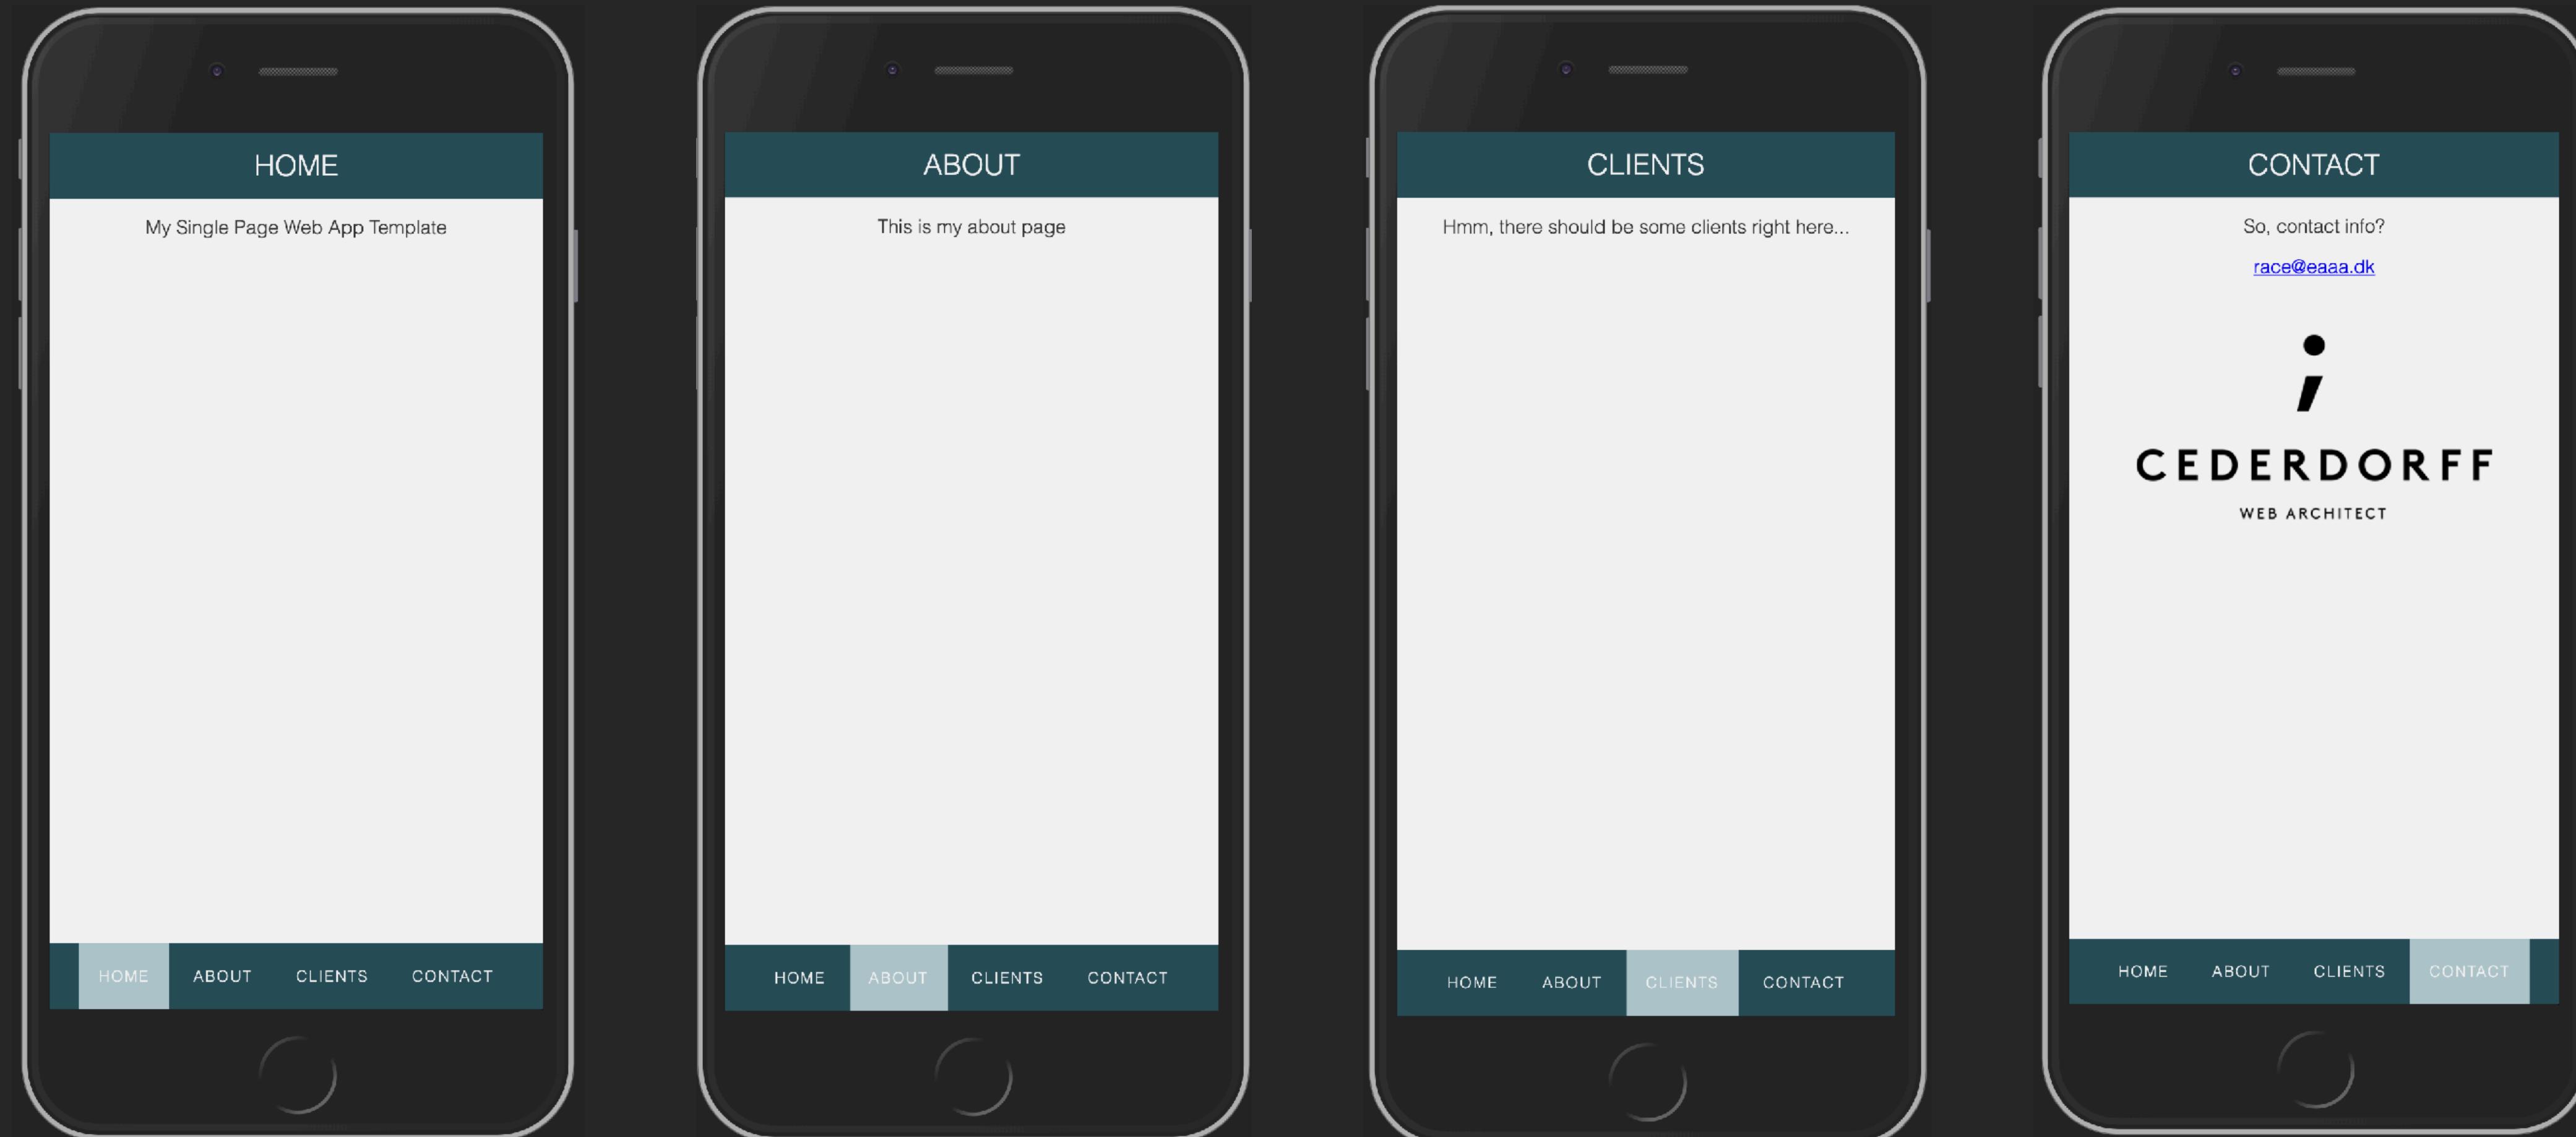


But RACE, how do you know all that stuff?

- [React Resources](#)
- [React Self-study](#)
- [Guides & Tutorials](#)
- [From Vanilla JavaScript to React Developer](#)

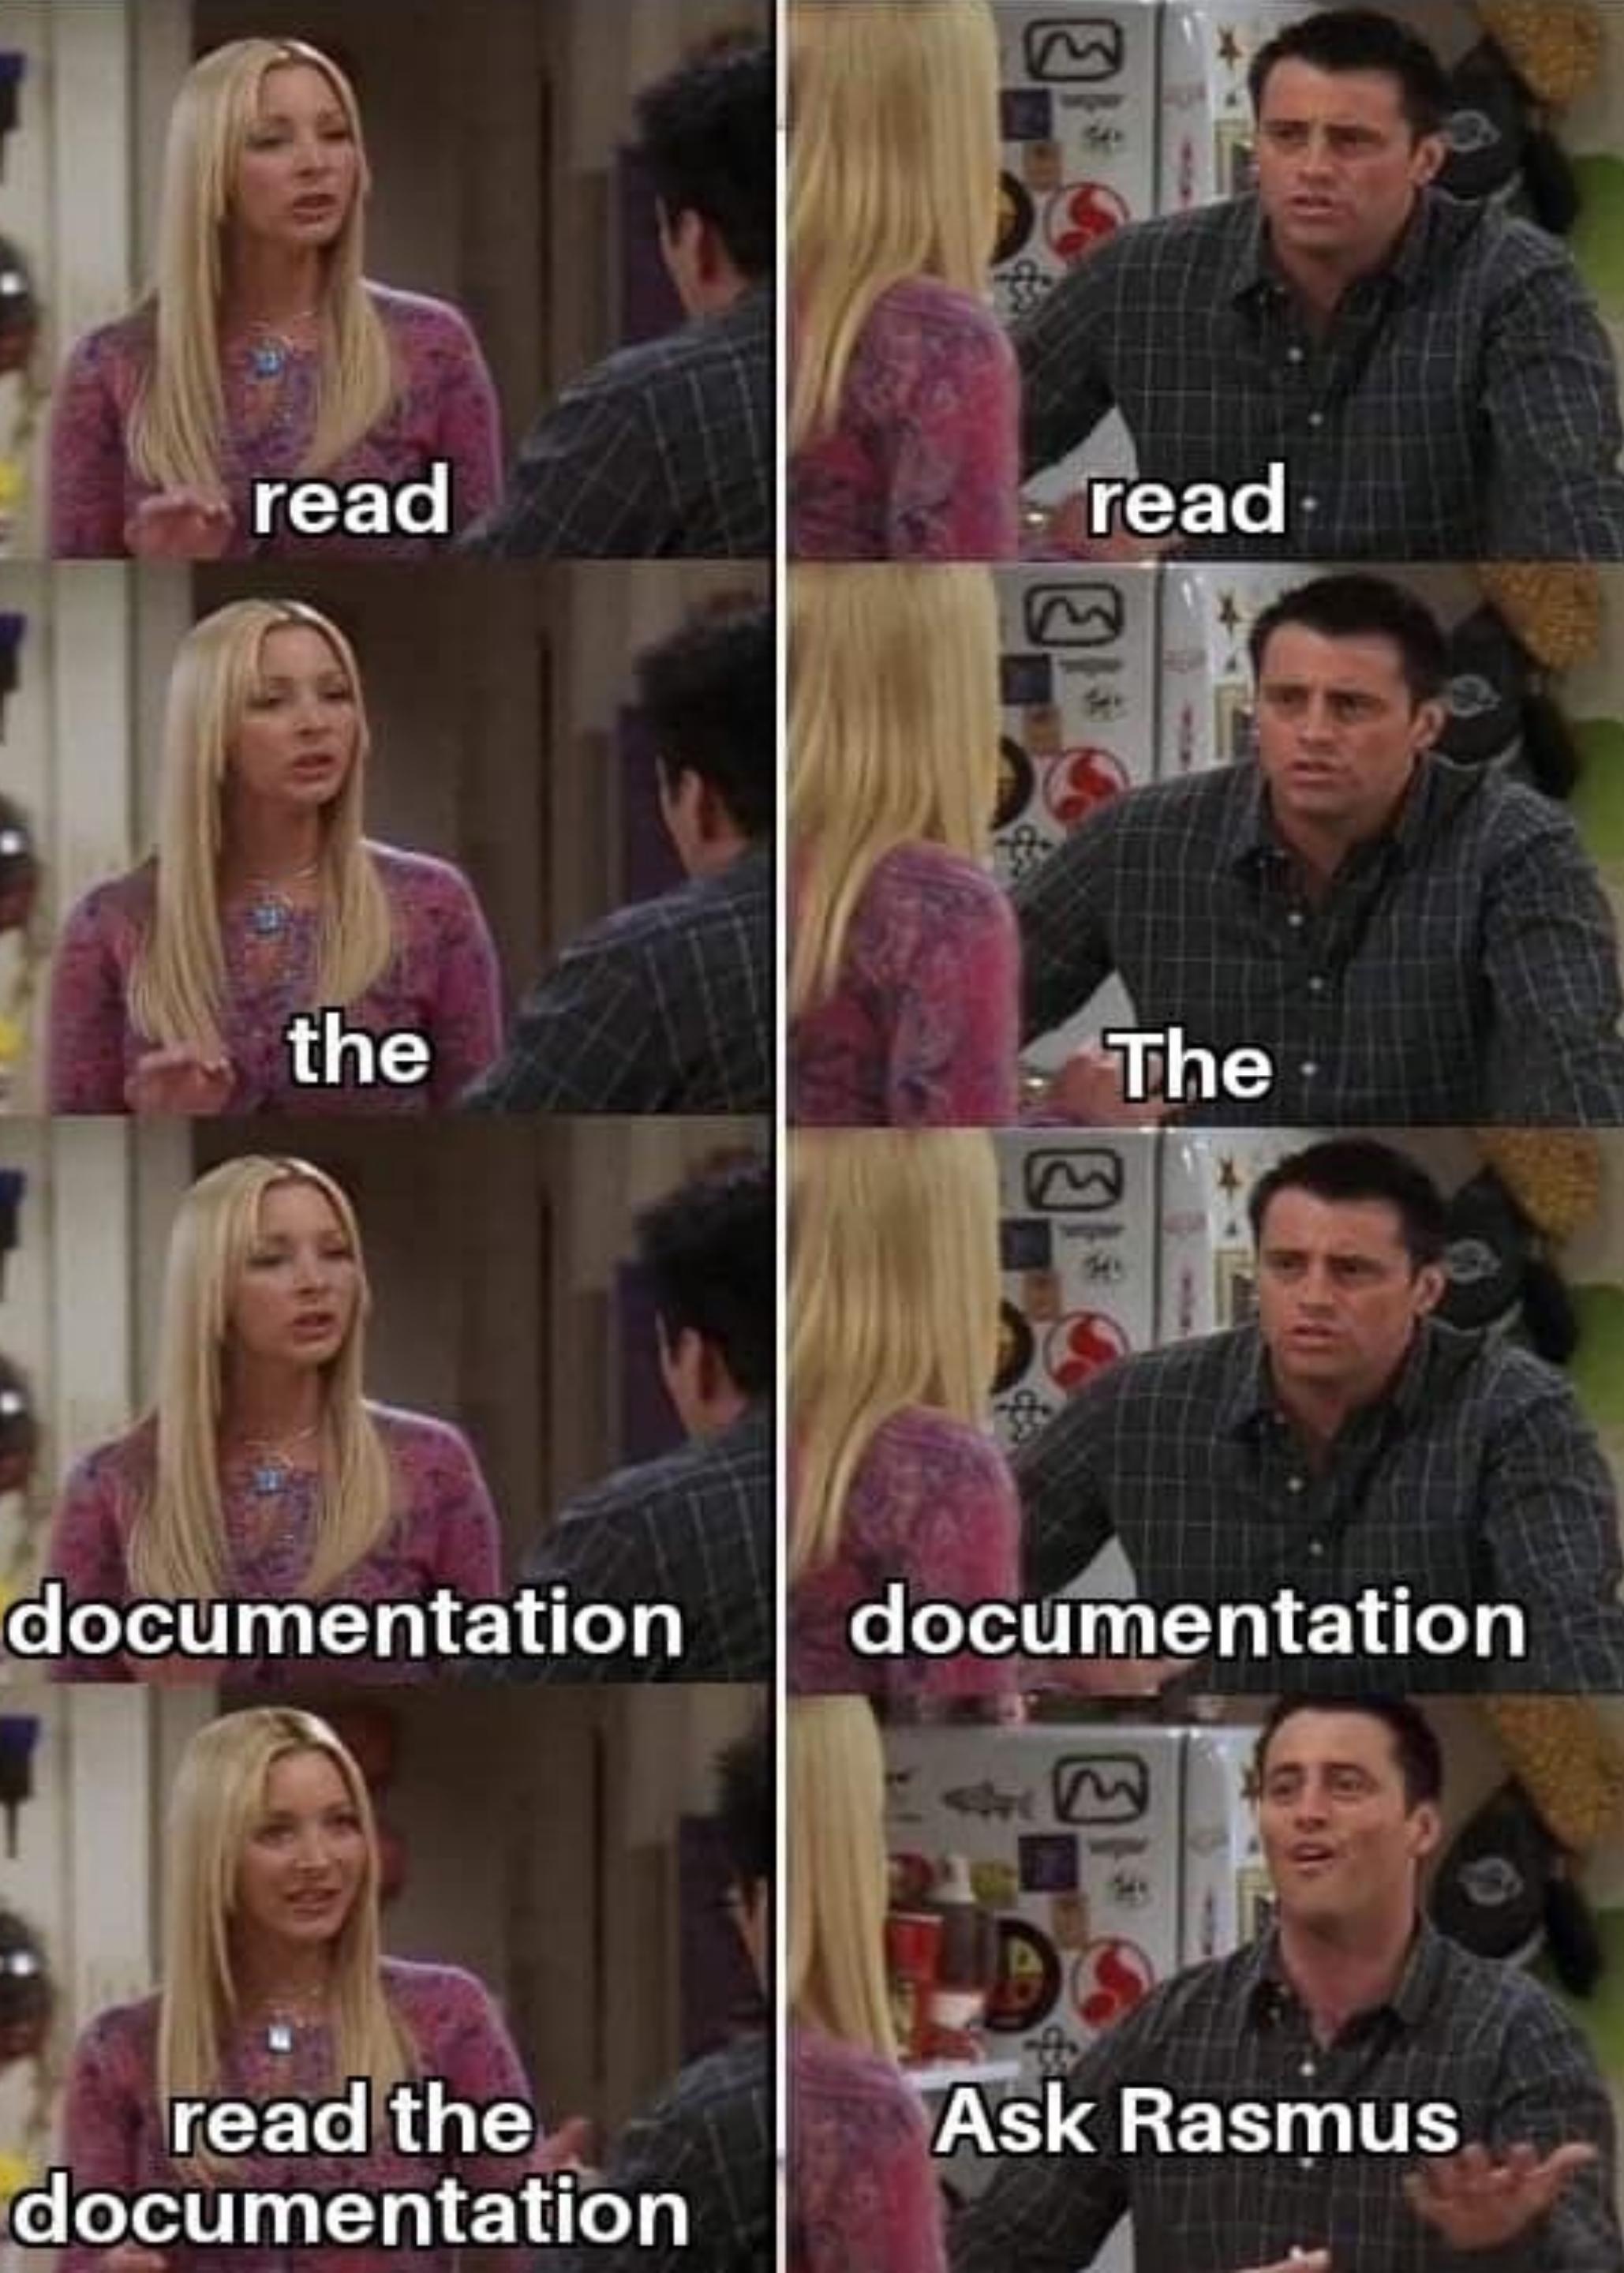

Create React SPA

With React Router

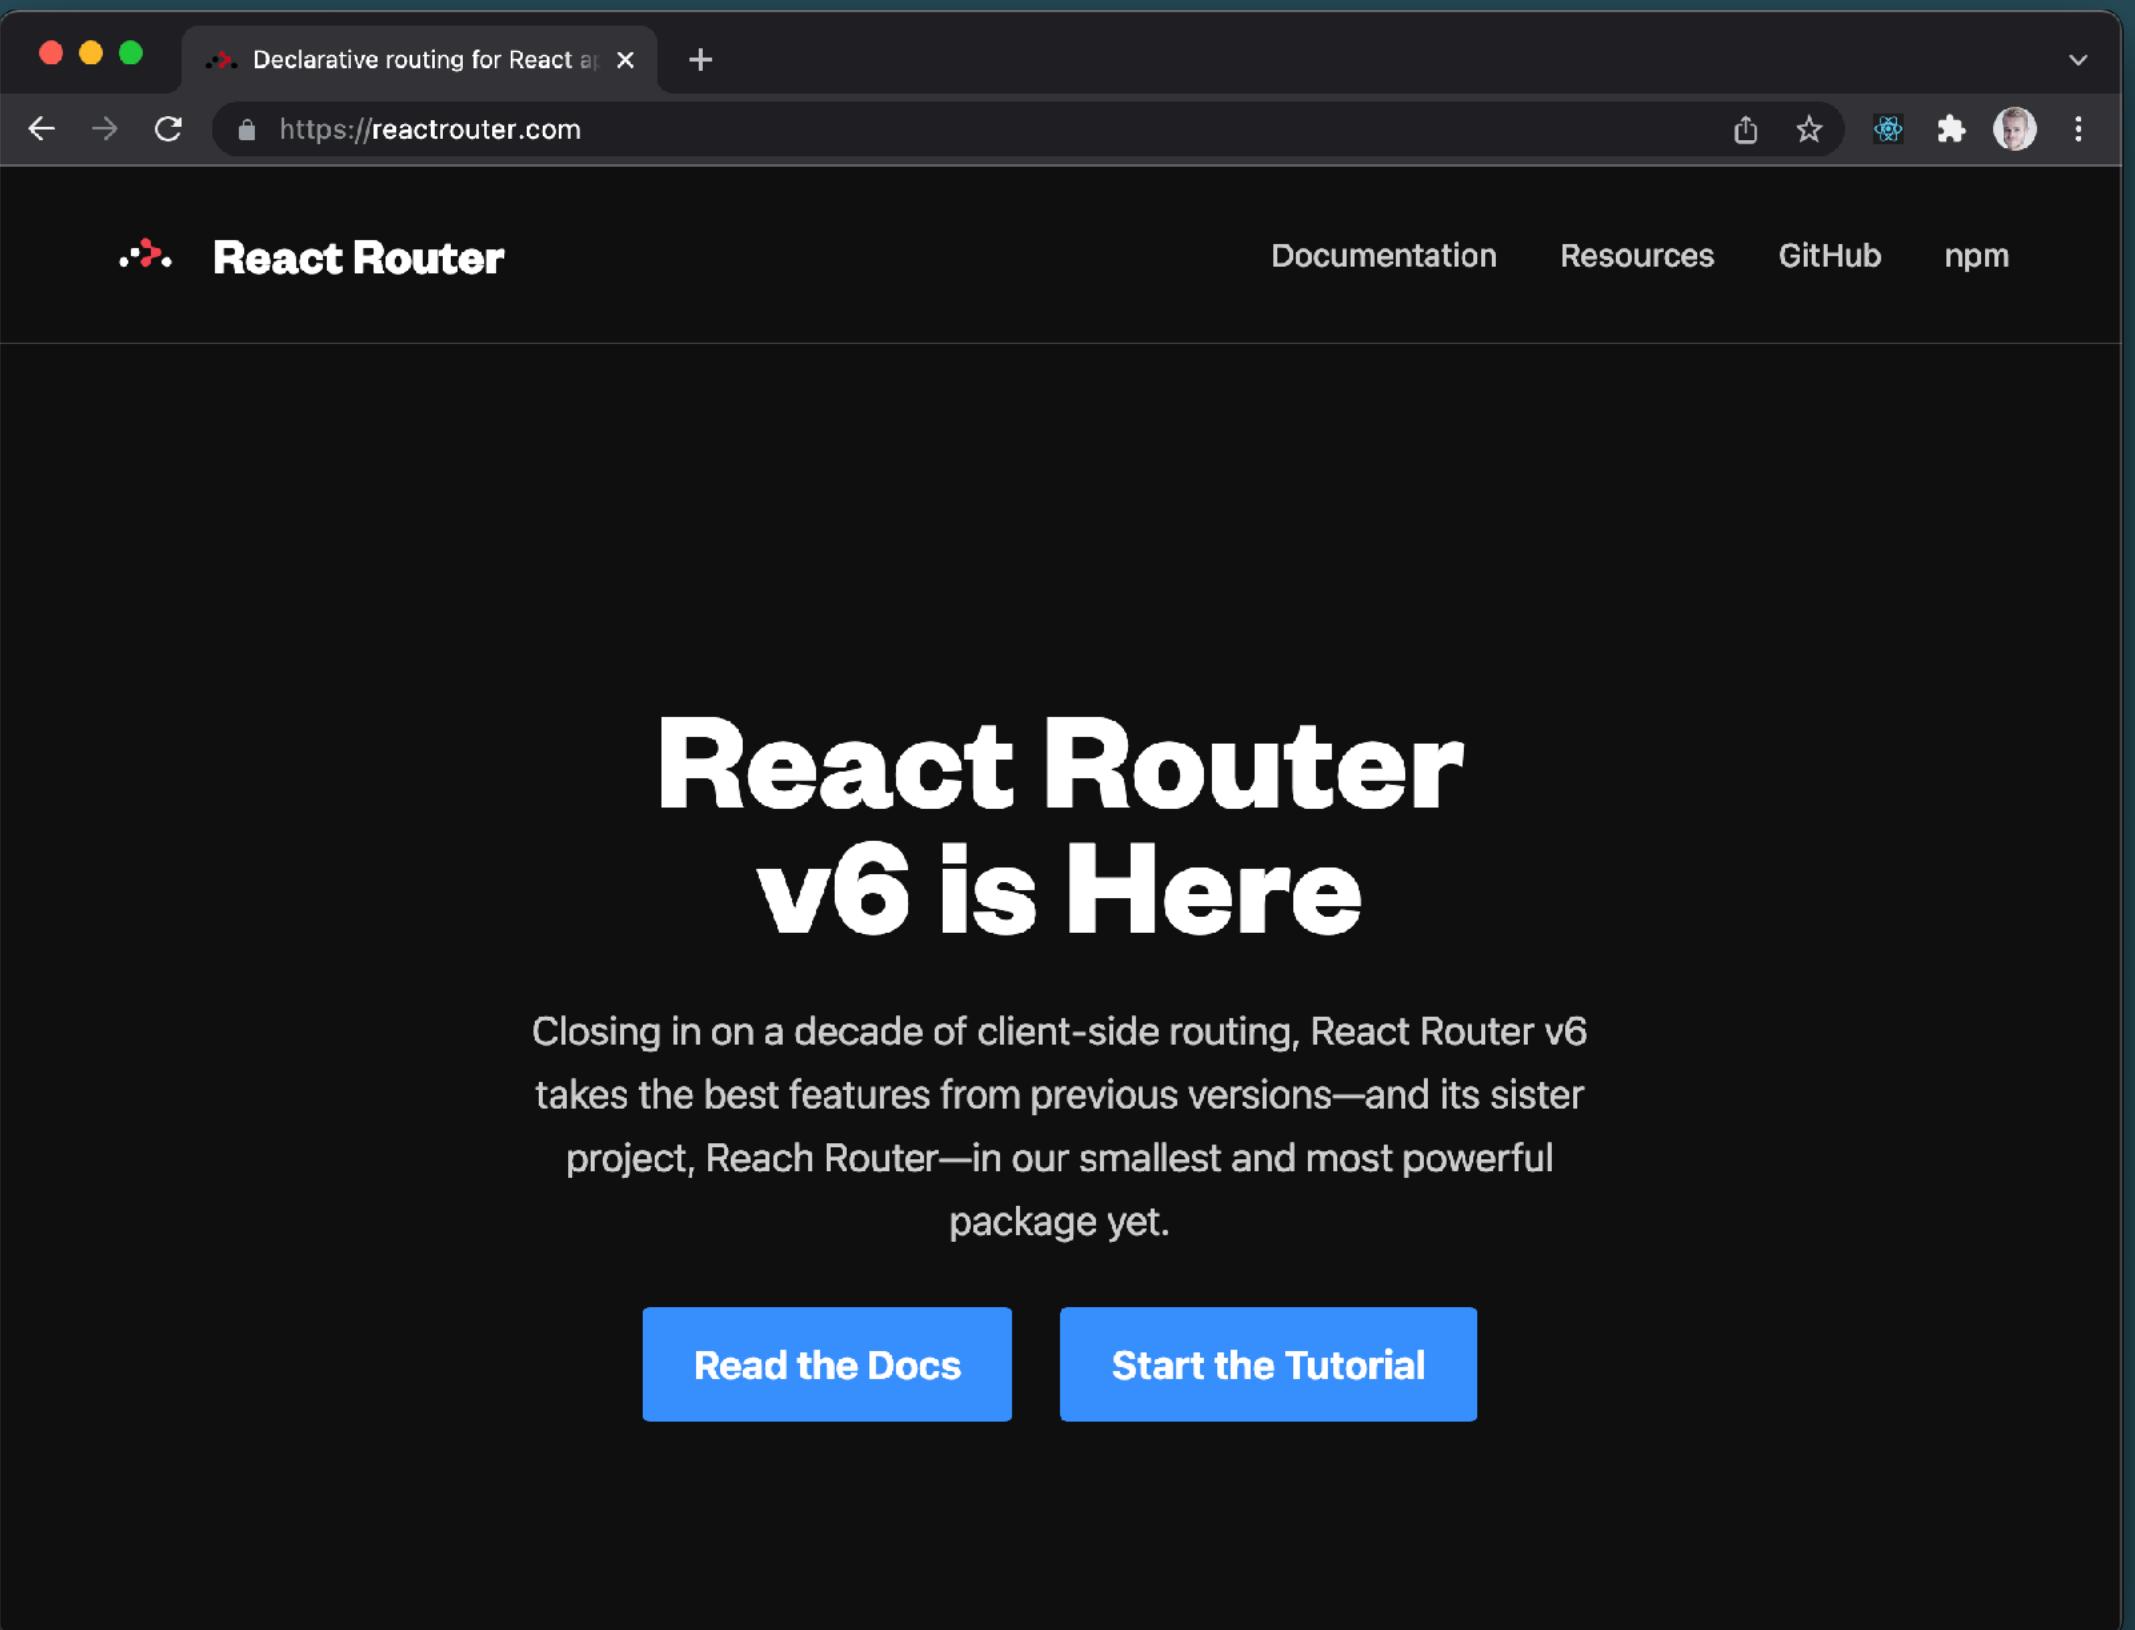

Create React SPA

React CRUD

React Firebase REST Post App https://race-rest.web.app

POSTS CREATE

 Morten Algy Bonderup
Senior Lecturer



Qui est esse

Est rerum tempore vitae sequi sint nihil reprehenderit dolor beatae ea dolores neque fugiat blanditiis voluptate porro vel nihil molestiae ut reiciendis qui aperiam non debitis possimus qui neque nisi nulla

 Dan Okkels Brendstrup
Lecturer



Consequuntur deleniti eos quia temporibus ab aliquid at

Voluptatem cumque tenetur consequatur expedita ipsum nemo quia explicabo aut eum minima consequatur tempore cumque quae est et et in consequuntur voluptatem voluptates aut

 Kim Elkjær Marcher-Jepsen
Senior Lecturer



At nam consequatur ea labore ea harum

Cupiditate quo est a modi nesciunt soluta ipsa voluptas error itaque dicta in autem qui minus magnam et distinctio eum accusamus ratione error aut

 Birgitte Kirk Iversen
Senior Lecturer



Jes Arbov
Lecturer




 Maria Louise Bendixen
Senior Lecturer




<https://race-rest.web.app/>

Web Development

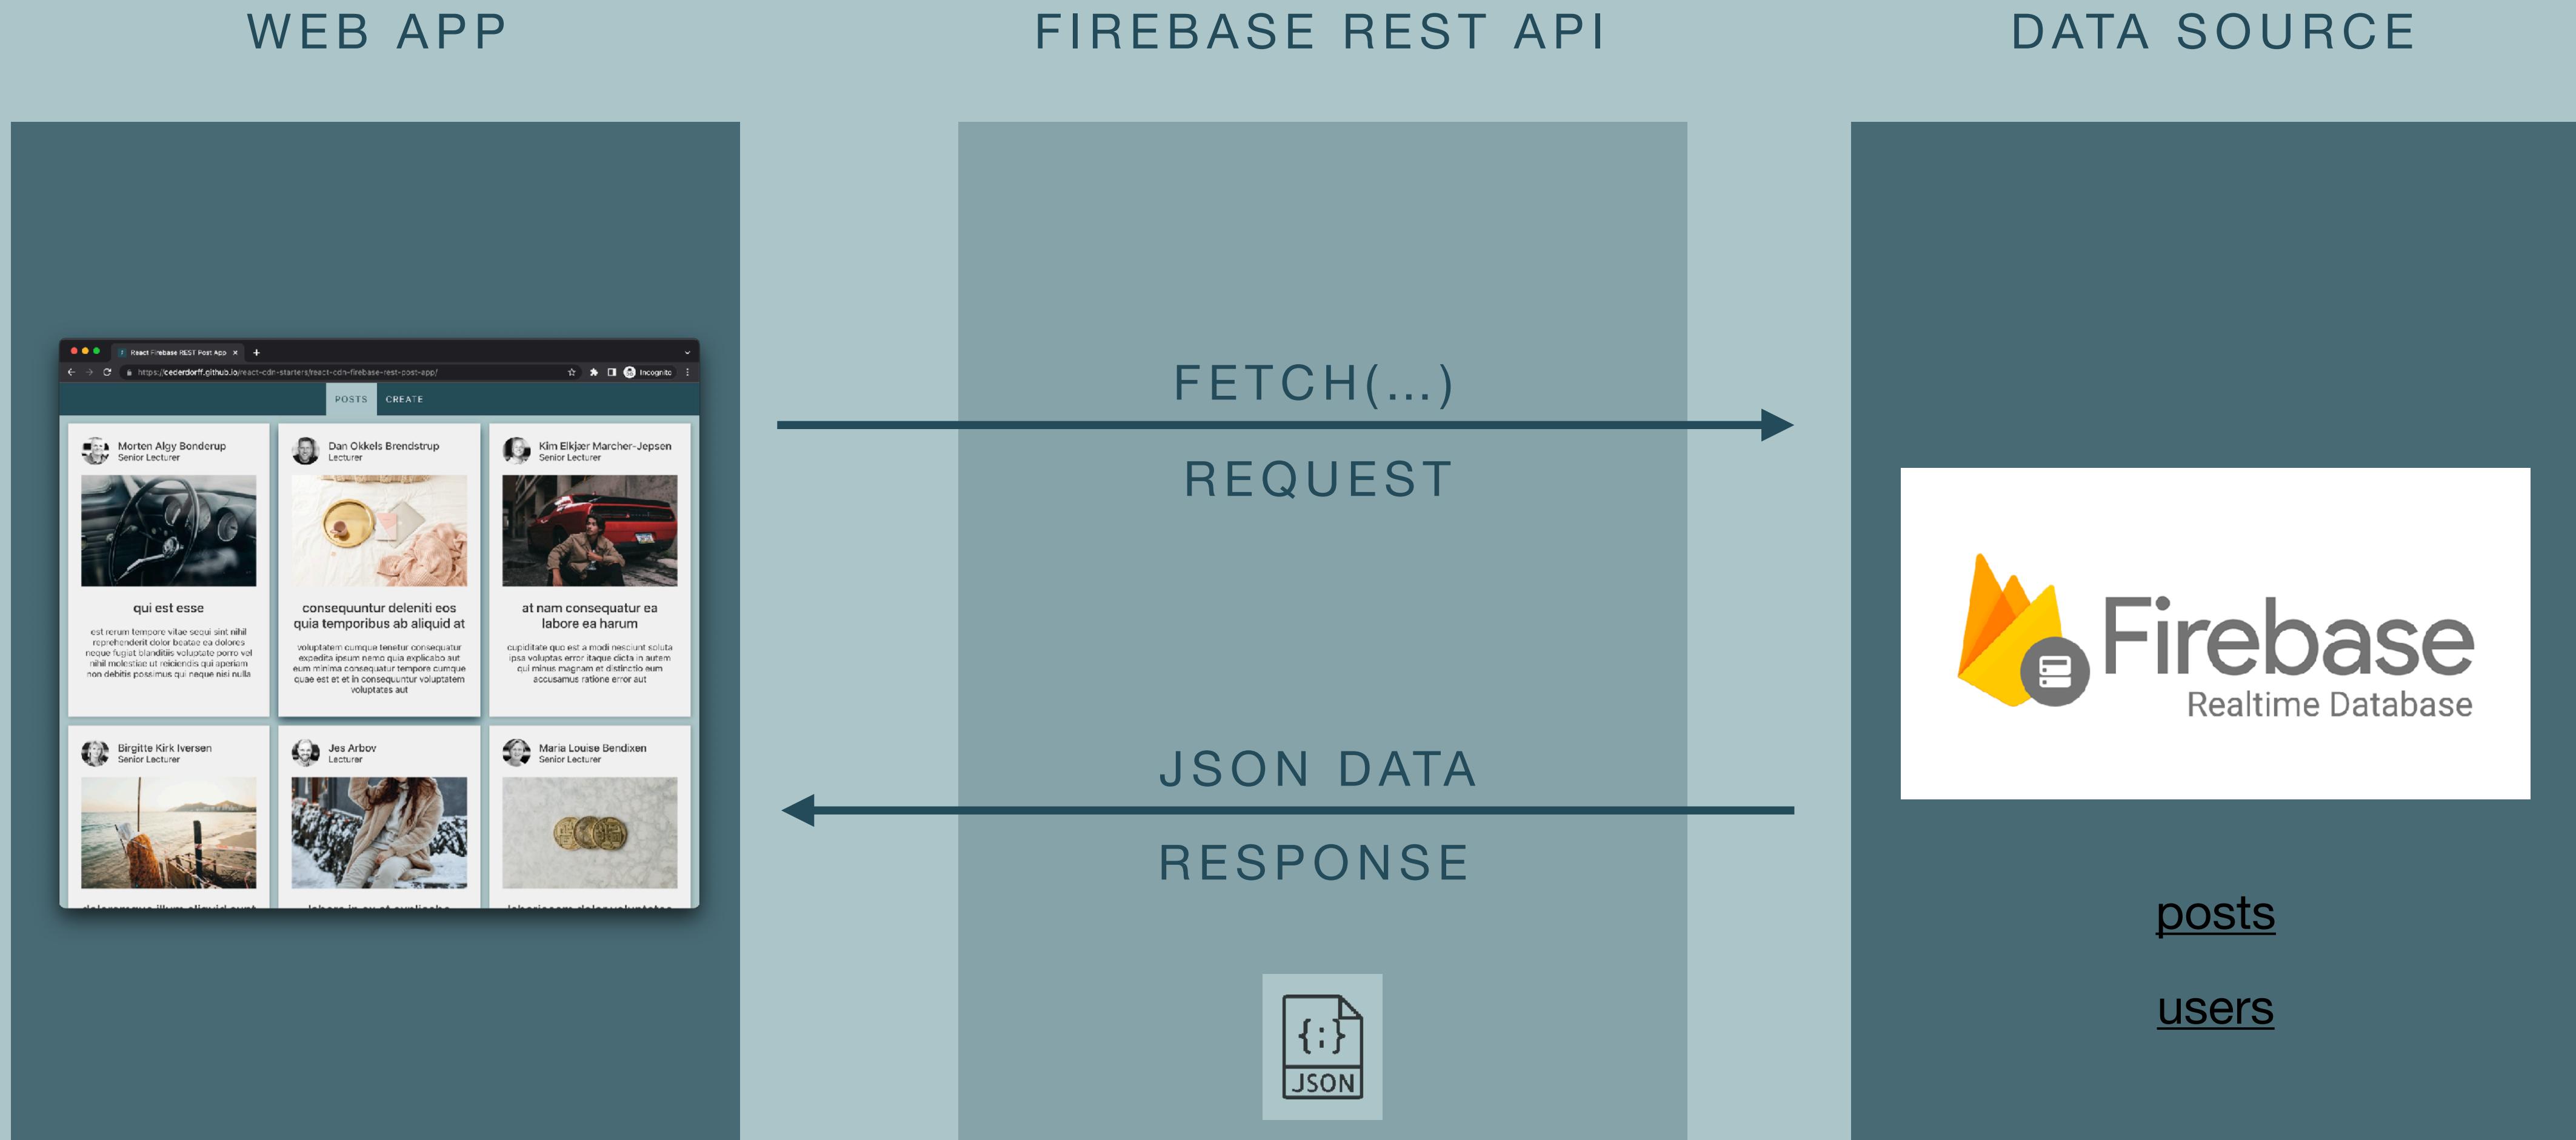


Two data sources

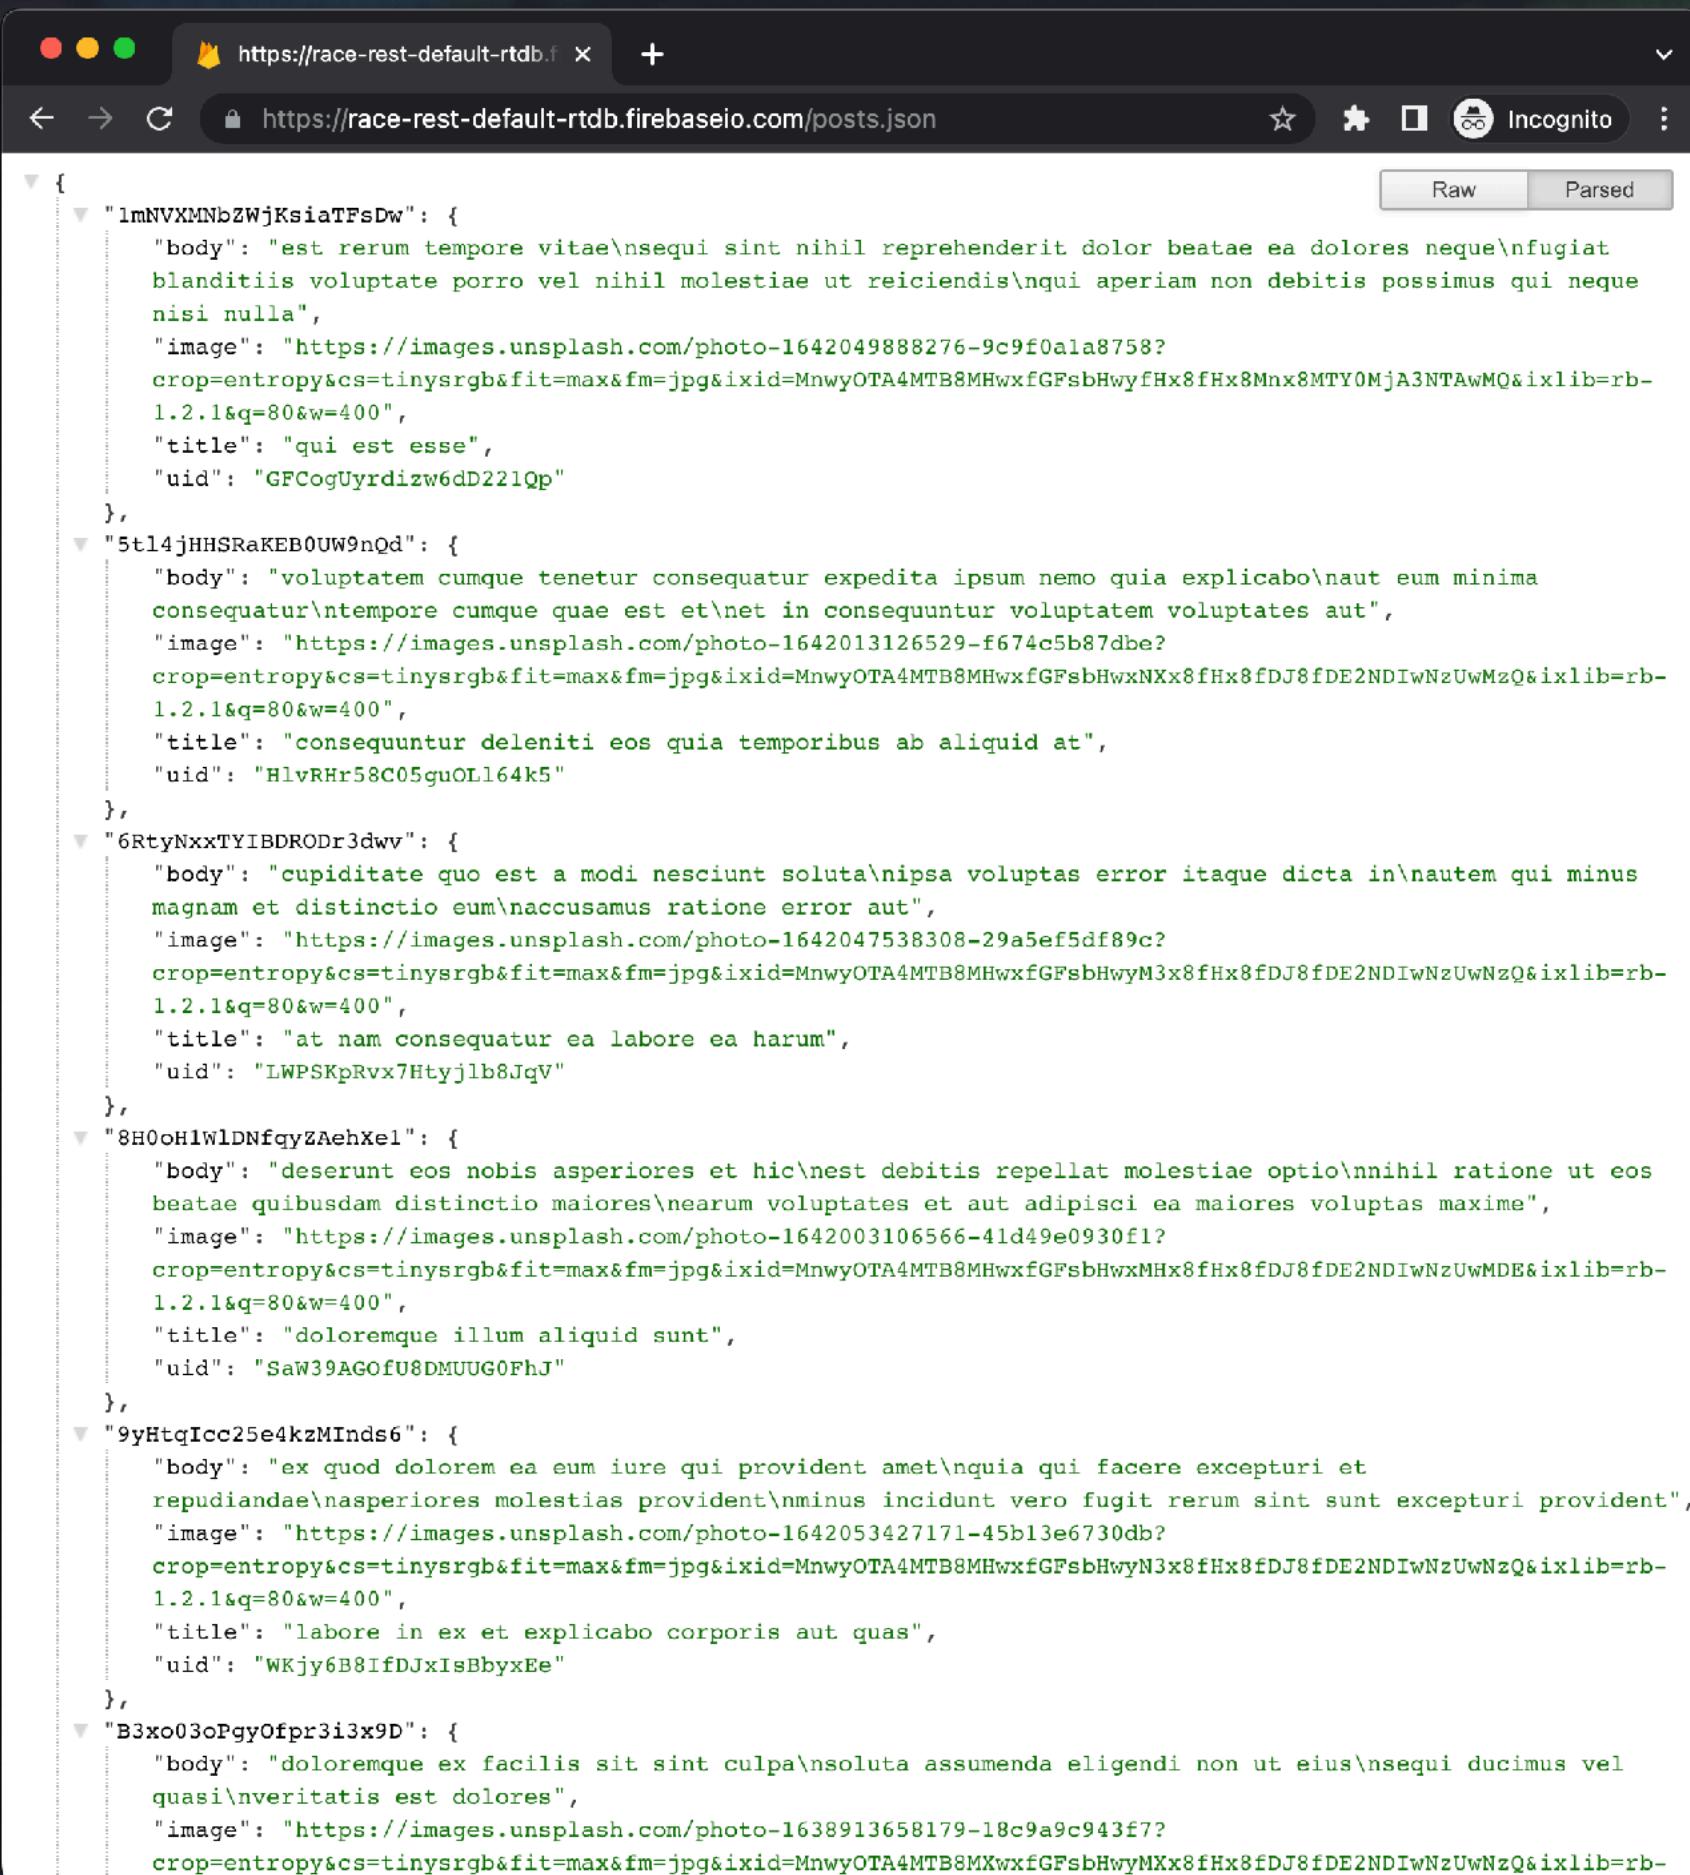

```
https://race-rest-default.firebaseio.com/posts.json
```

```
{ "1mNVXMMNbZWjKsiaTFsDw": { "body": "est rerum tempore vitae\\nsequi sint nihil reprehenderit dolor beatae ea dolores neque\\nfugiat blanditiis voluptate porro vel nihil molestiae ut reiciendis\\nqui aperiam non debitis possimus qui neque nisi nulla", "image": "https://images.unsplash.com/photo-1642049888276-9c9f0ala8758?crop=entropy&cs=tinysrgb&fit=max&fm=jpg&ixid=MnwyOTA4MTB8MHwxfgFsbHwyfHx8fHx8Mnx8MTY0MjA3NTAwMQ&ixlib=rb-1.2.1&q=80&w=400", "title": "qui est esse", "uid": "GFCogUyrdizw6dD221Qp" }, "5t14jHHSRAKEB0UW9npd": { "body": "voluptatem cumque tenetur consequatur expedita ipsum nemo quia explicabo\\naut eum minima consequatur\\ntempore cumque quae est et\\net in consequuntur voluptatem voluptates aut", "image": "https://images.unsplash.com/photo-1642013126529-f674c5b87dbe?crop=entropy&cs=tinysrgb&fit=max&fm=jpg&ixid=MnwyOTA4MTB8MHwxfgFsbHwxNx8fHx8fDJ8fDE2NDIwNzUwMzQ&ixlib=rb-1.2.1&q=80&w=400", "title": "consequuntur deleniti eos quia temporibus ab aliquid at", "uid": "HlvRHR58C05guOL164k5" }, "6RtyNxxTYIBDRDr3dwv": { "body": "cupiditate quo est a modi nesciunt soluta\\nipsa voluptas error itaque dicta in\\nautem qui minus magnam et distinctio eum\\naccusamus ratione error aut", "image": "https://images.unsplash.com/photo-1642047538308-29a5ef5df89c?crop=entropy&cs=tinysrgb&fit=max&fm=jpg&ixid=MnwyOTA4MTB8MHwxfgFsbHwyM3x8fHx8fDJ8fDE2NDIwNzUwNzQ&ixlib=rb-1.2.1&q=80&w=400", "title": "at nam consequatur ea labore ea harum", "uid": "LWPSKpRvx7Htyjl8JqV" }, "8H0oH1wLDNfgyZAhXei": { "body": "deserunt eos nobis asperiores et hic\\nest debitis repellat molestiae optio\\nnihil ratione ut eos beatae quibusdam distinctio maiores\\nearum voluptates et aut adipisci ea maiores voluptas maxime", "image": "https://images.unsplash.com/photo-1642003106566-41d49e0930f1?crop=entropy&cs=tinysrgb&fit=max&fm=jpg&ixid=MnwyOTA4MTB8MHwxfgFsbHwxMHx8fHx8fDJ8fDE2NDIwNzUwMDE&ixlib=rb-1.2.1&q=80&w=400", "title": "doloremque illum aliquid sunt", "uid": "SaW39AGOfU8DMUUG0PhJ" }, "9yHtqIcc25e4kzMInds6": { "body": "ex quod dolorum ea eum iure qui provident amet\\nquia qui facere excepturi et repudiandae\\nasperiores molestias provident\\nminus incidente vero fugit rerum sint sunt excepturi provident", "image": "https://images.unsplash.com/photo-1642053427171-45b1e6730db?crop=entropy&cs=tinysrgb&fit=max&fm=jpg&ixid=MnwyOTA4MTB8MHwxfgFsbHwyN3x8fHx8fDJ8fDE2NDIwNzUwNzQ&ixlib=rb-1.2.1&q=80&w=400", "title": "labore in ex et explicabo corporis aut quas", "uid": "WKjy6B8IfDJxIsBbyxEe" }, "B3x003oPgyOfpr3i3x9D": { "body": "doloremque ex facilis sit sint culpa\\nsoluta assumenda eligendi non ut eius\\nsequi ducimus vel quasi\\nveritatis est dolores", "image": "https://images.unsplash.com/photo-1638913658179-18c9a9c943f7?crop=entropy&cs=tinysrgb&fit=max&fm=jpg&ixid=MnwyOTA4MTB8MXxfGFsbHwyMxx8fHx8fDJ8fDE2NDIwNzUwNzQ&ixlib=rb-1.2.1&q=80&w=400" } }
```


race-rest-default.firebaseio.com/posts.json

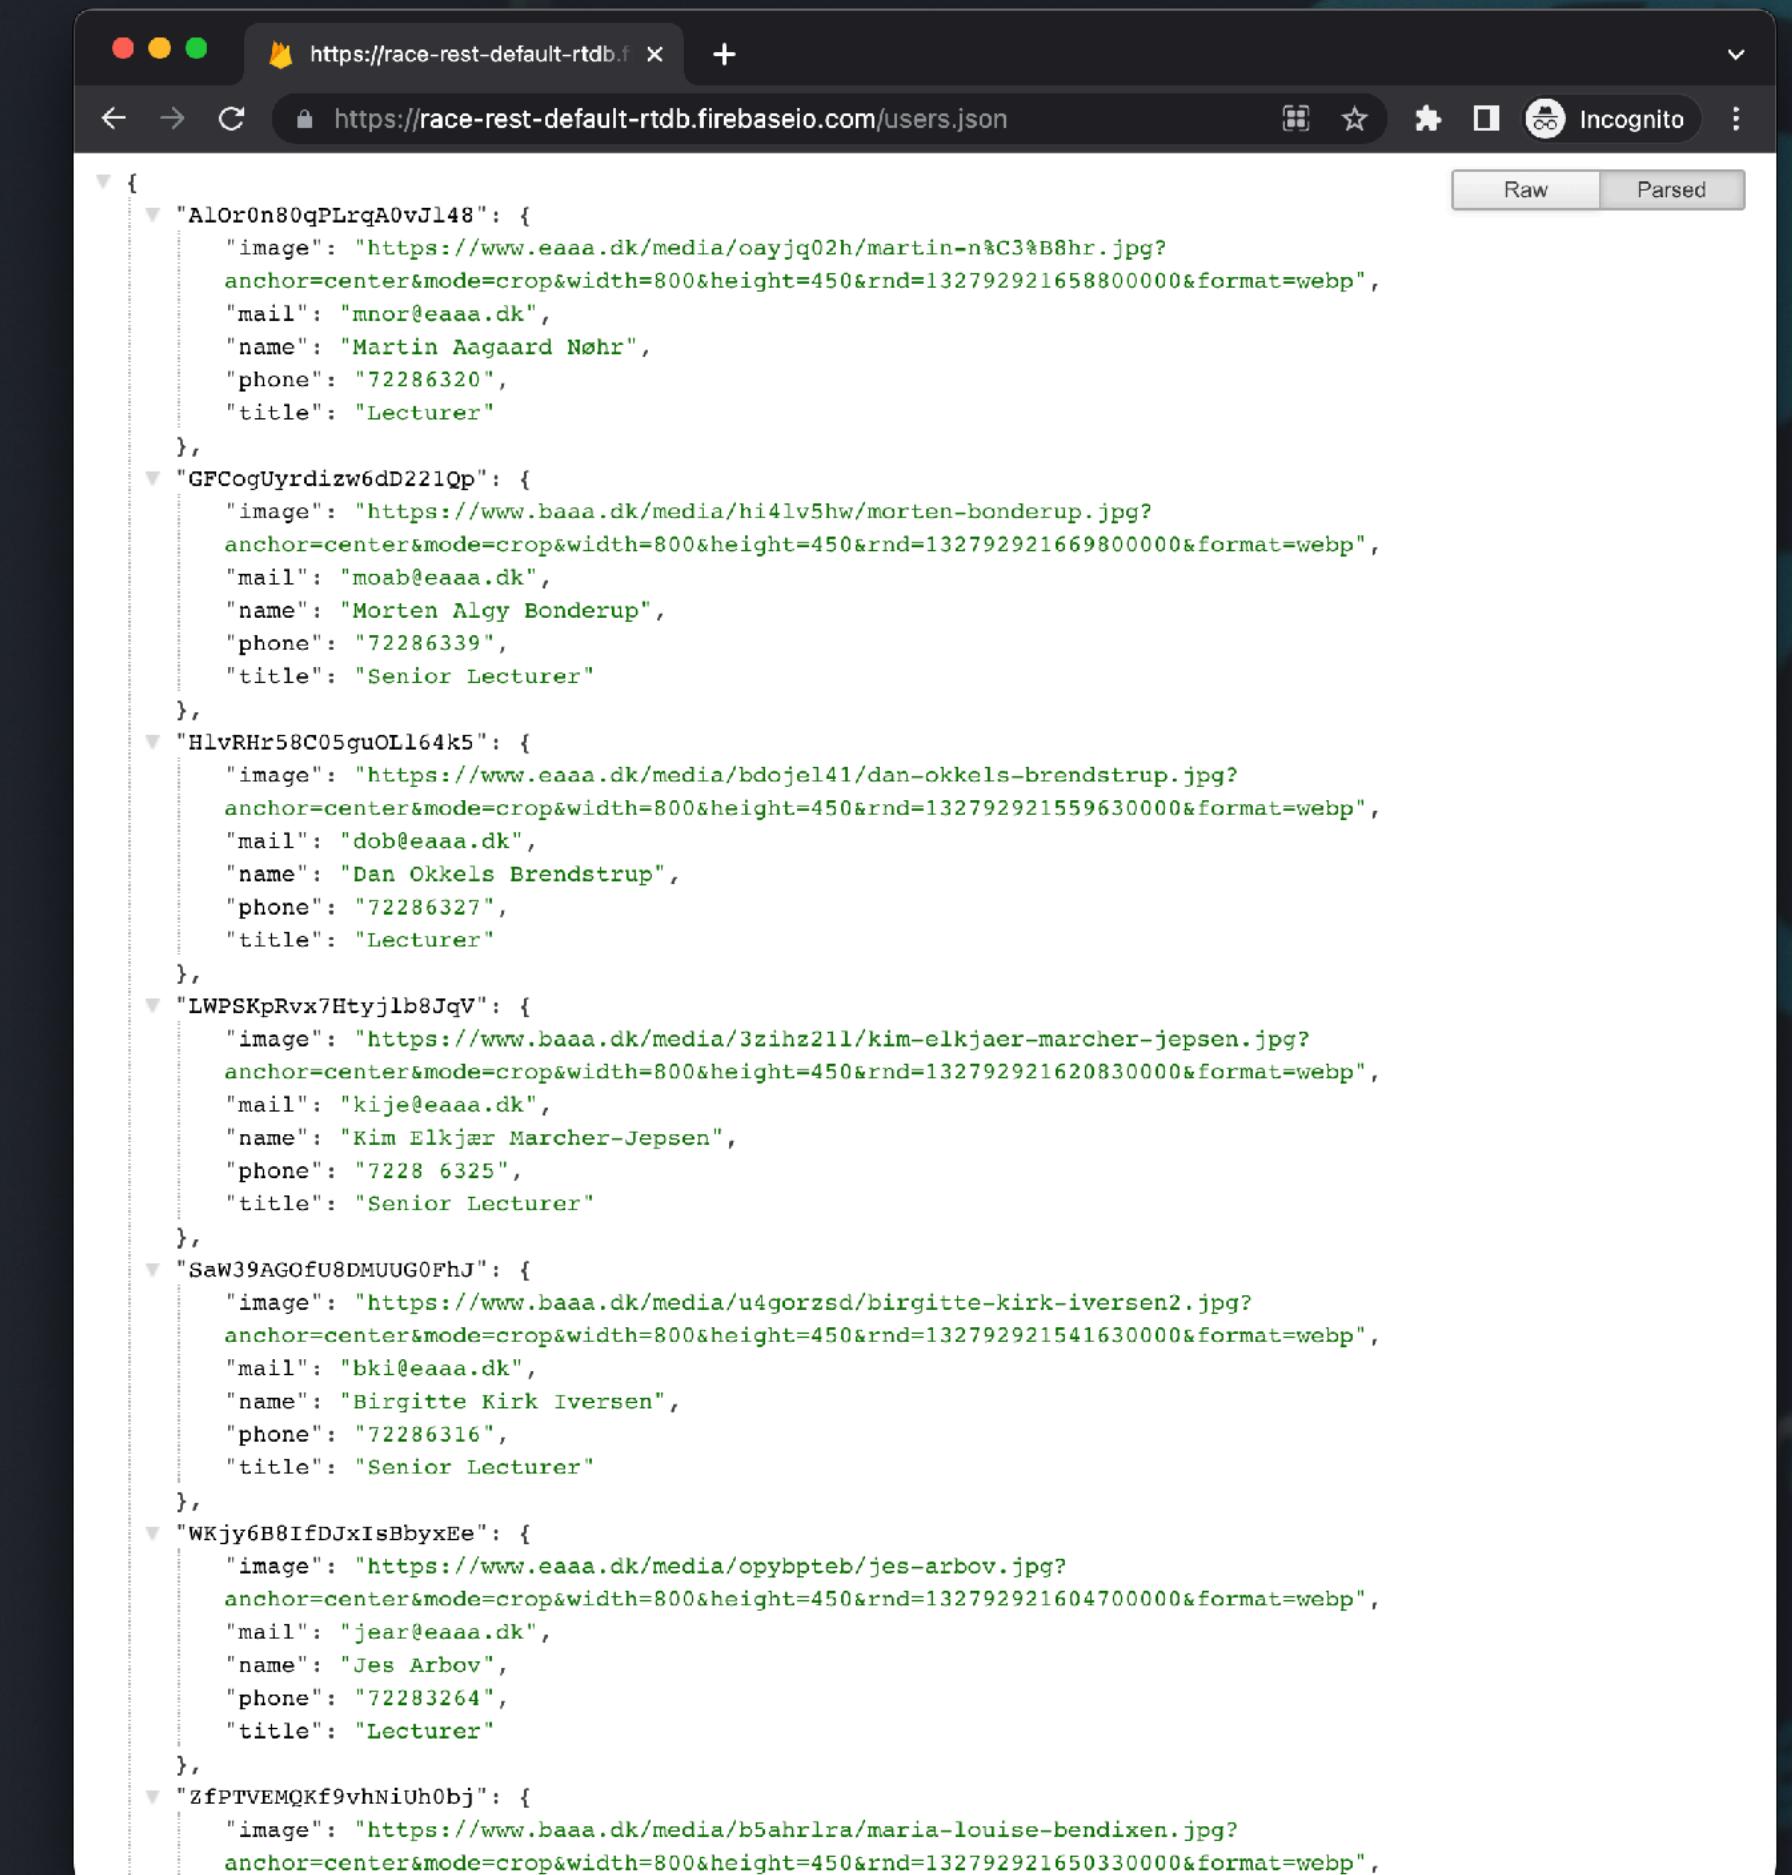

```
https://race-rest-default.firebaseio.com/users.json
```

```
{ "AlOr0n80qPLrqA0vJ148": { "image": "https://www.eaaa.dk/media/oayjq02h/martin-n%C3%B8hr.jpg?", "anchor": "center", "mode": "crop", "width": 800, "height": 450, "rnd": 132792921658800000, "format": "webp" }, "mnor@eaaa.dk": { "name": "Martin Aagaard Nøhr", "phone": "72286320", "title": "Lecturer" }, "GFCogUyrdizw6dD221Qp": { "image": "https://www.baaa.dk/media/hi4lv5hw/morten-bonderup.jpg?", "anchor": "center", "mode": "crop", "width": 800, "height": 450, "rnd": 132792921669800000, "format": "webp" }, "moab@eaaa.dk": { "name": "Morten Algy Bonderup", "phone": "72286339", "title": "Senior Lecturer" }, "HlvRHR58C05guOL164k5": { "image": "https://www.eaaa.dk/media/bdoje141/dan-okkels-brendstrup.jpg?", "anchor": "center", "mode": "crop", "width": 800, "height": 450, "rnd": 132792921559630000, "format": "webp" }, "dob@eaaa.dk": { "name": "Dan Okkels Brendstrup", "phone": "72286327", "title": "Lecturer" }, "LWPSKpRvx7Htyjl8JqV": { "image": "https://www.baaa.dk/media/3zihz211/kim-elkjær-marcher-jepsen.jpg?", "anchor": "center", "mode": "crop", "width": 800, "height": 450, "rnd": 132792921620830000, "format": "webp" }, "kije@eaaa.dk": { "name": "Kim Elkjær Marcher-Jepsen", "phone": "7228 6325", "title": "Senior Lecturer" }, "SaW39AGOfU8DMUUG0PhJ": { "image": "https://www.baaa.dk/media/u4gorzsdbirgitte-kirk-iversen2.jpg?", "anchor": "center", "mode": "crop", "width": 800, "height": 450, "rnd": 132792921541630000, "format": "webp" }, "bki@eaaa.dk": { "name": "Birgitte Kirk Iversen", "phone": "72286316", "title": "Senior Lecturer" }, "WKjy6B8IfDJxIsBbyxEe": { "image": "https://www.eaaa.dk/media/opybpptebsjes-arbov.jpg?", "anchor": "center", "mode": "crop", "width": 800, "height": 450, "rnd": 132792921604700000, "format": "webp" }, "jear@eaaa.dk": { "name": "Jes Arbov", "phone": "72283264", "title": "Lecturer" }, "zfPTVEMQKf9vhNiUh0bj": { "image": "https://www.baaa.dk/media/b5ahrlra/maria-louise-bendixen.jpg?", "anchor": "center", "mode": "crop", "width": 800, "height": 450, "rnd": 132792921650330000, "format": "webp" } }
```

race-rest-default.firebaseio.com/users.json

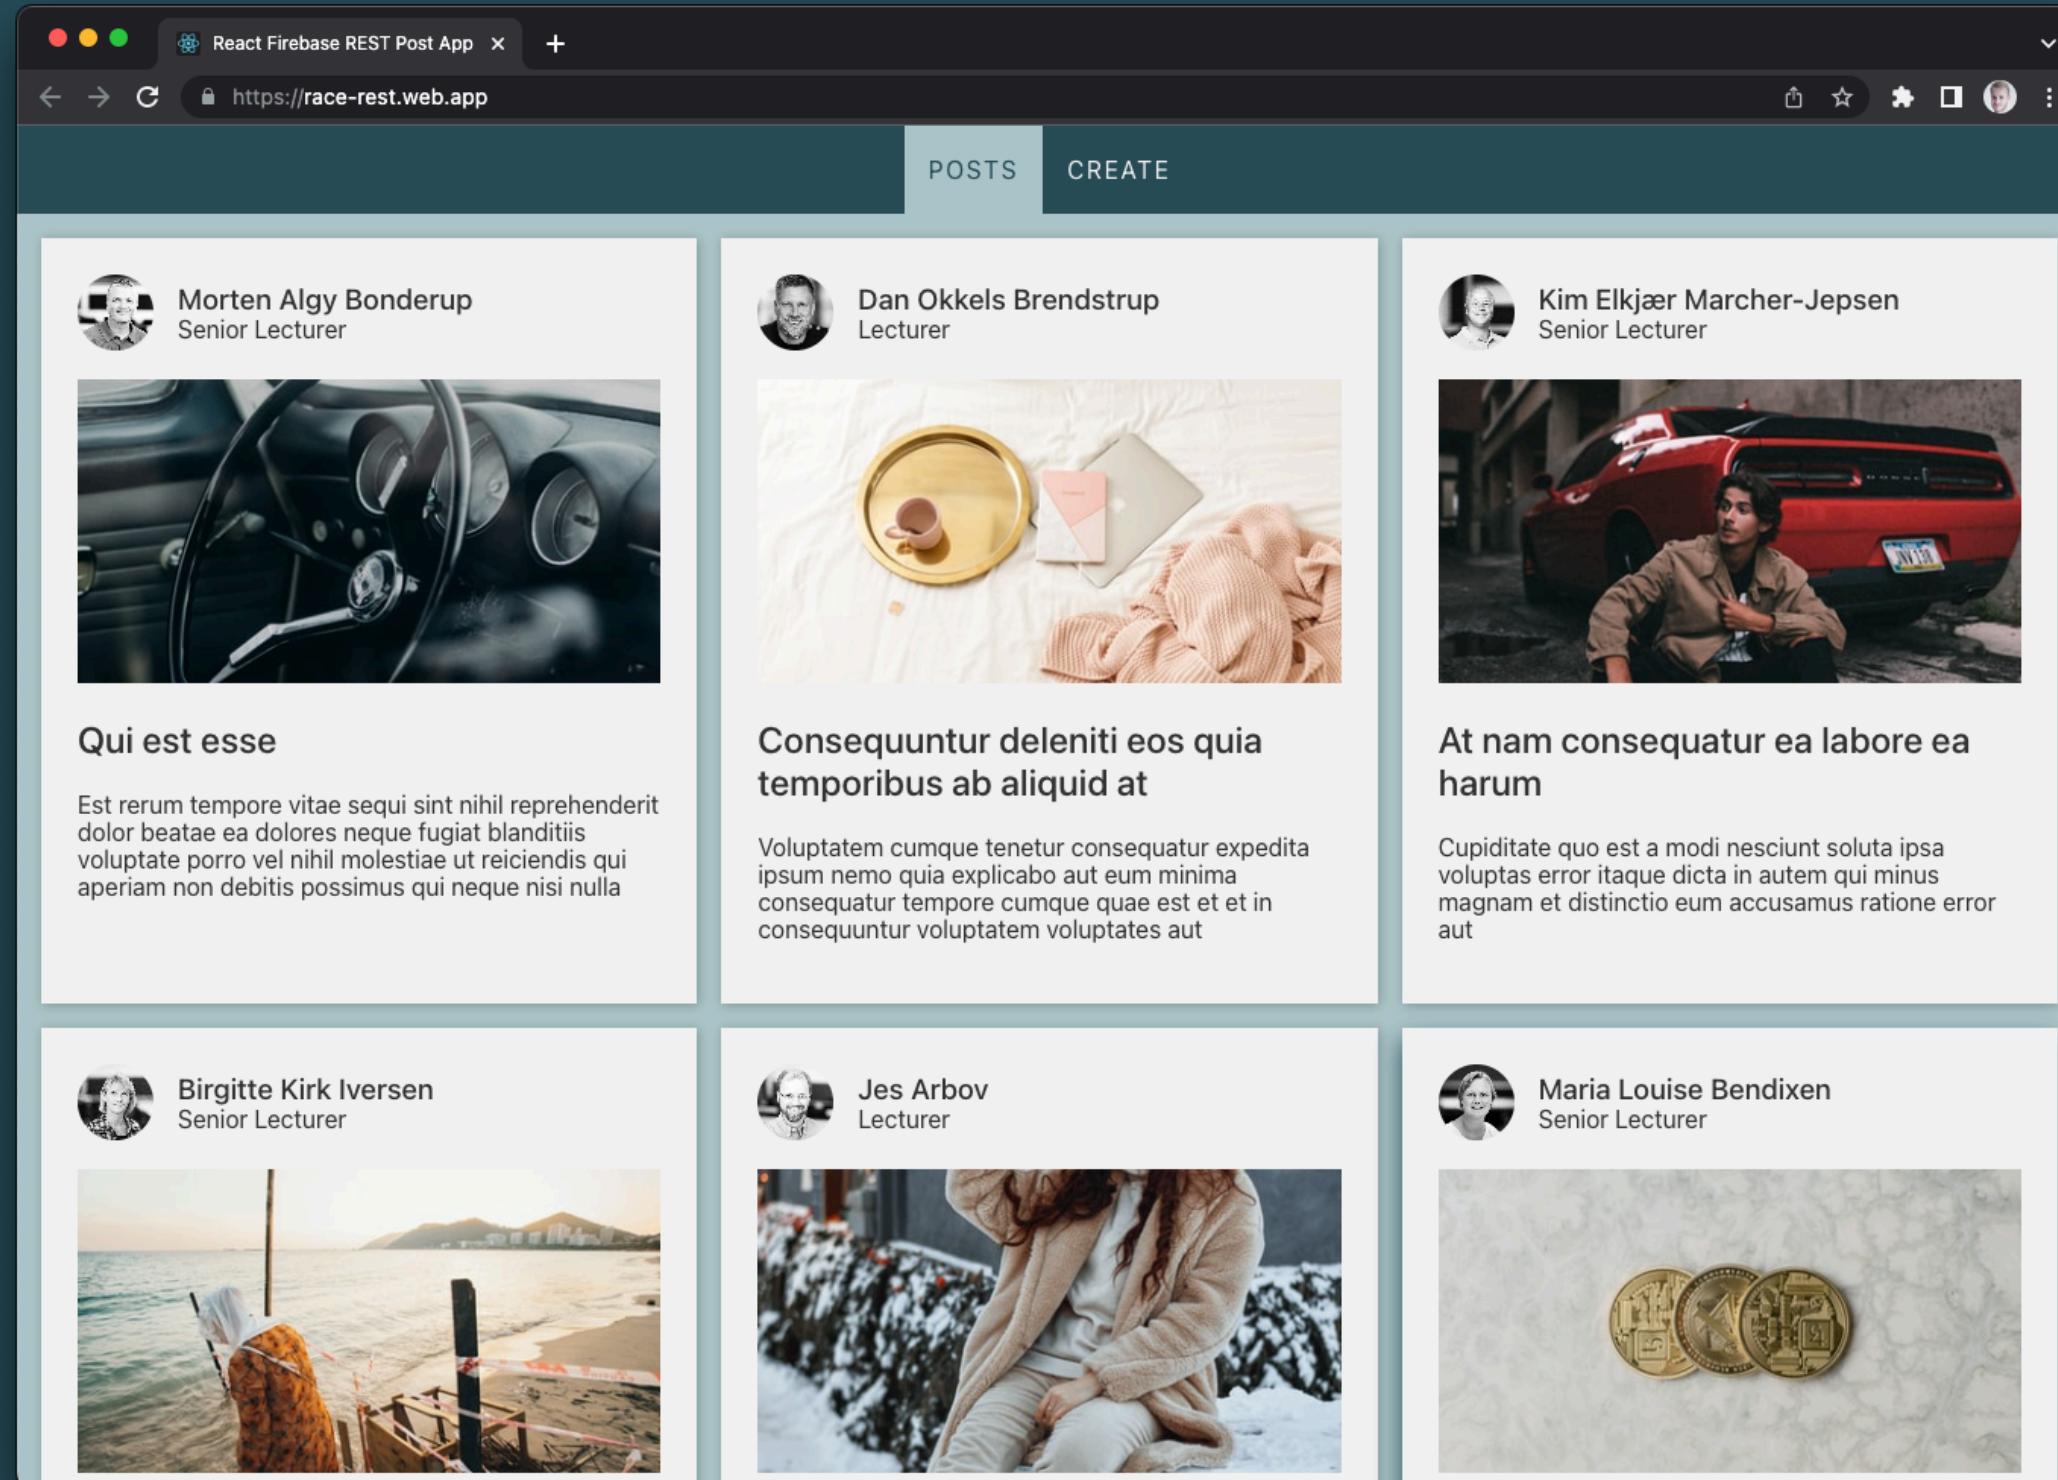

React CRUD App w/ Firebase REST

<https://race.notion.site/React-CRUD-App-w-Firebase-eea97554f9b94f6688fcacc5d2d51f62>

Read

GET is the default request method for fetch.

```
import { useState, useEffect } from "react";
import PostCard from "../components/PostCard";

export default function HomePage() {
  const [posts, setPosts] = useState([]);

  useEffect(() => {
    async function getPosts() {
      const url = "https://race-rest-default.firebaseio.com/posts.json";
      const response = await fetch(url);
      const data = await response.json();
      const postsArray = Object.keys(data).map(key => ({ id: key, ...data[key] }));
      setPosts(postsArray);
    }
    getPosts();
  }, []);

  return (
    <section className="page">
      <section className="grid-container">
        {posts.map(post => (
          <PostCard post={post} key={post.id} />
        ))}
      </section>
    </section>
  );
}
```

PostCard

Use the prop post to implement the structure of the PostCard component. Skip handleClick for now.

```
import { useNavigate } from "react-router-dom";

export default function PostCard({ post }) {
  const navigate = useNavigate();

  /**
   * handleClick is called when user clicks on the Article (PostCard)
   */
  function handleClick() {
    navigate(`posts/${post.id}`);
  }

  return (
    <article onClick={handleClick}>
      <img src={post.image} alt={post.title} />
      <h2>{post.title}</h2>
      <p>{post.body}</p>
    </article>
  );
}
```

PostCard

Add user details on every PostCard. Add it in PostCard or create a separate component to handle the logic. I created a separate UserAvatar component.

```
import { useNavigate } from "react-router-dom";
import UserAvatar from "./UserAvatar";

export default function PostCard({ post }) {
  const navigate = useNavigate();

  /**
   * handleClick is called when user clicks on the Article (PostCard)
   */
  function handleClick() {
    navigate(`posts/${post.id}`);
  }

  return (
    <article onClick={handleClick}>
      <UserAvatar uid={post.uid} />
      <img src={post.image} alt={post.title} />
      <h2>{post.title}</h2>
      <p>{post.body}</p>
    </article>
  );
}
```

UserAvatar

Based on the prop uid, user detail is fetched from Firebase and saved in a state. Note that the user state is initialised with a default object with placeholders.

```
import { useState, useEffect } from "react";
import placeholder from "../assets/img/user-placeholder.jpg";

export default function UserAvatar({ uid }) {
  const [user, setUser] = useState({
    image: placeholder,
    name: "User's Name",
    title: "User's Title"
  });
  const url = `https://race-rest-default-firebaseio.com/users/${uid}.json`;

  useEffect(() => {
    async function getUser() {
      const response = await fetch(url);
      const data = await response.json();
      console.log(data);
      setUser(data);
    }
    getUser();
  }, [url]);
}

return (
  <div className="avatar">
    <img src={user.image} alt={user.id} />
    <span>
      <h3>{user.name}</h3>
      <p>{user.title}</p>
    </span>
  </div>
);

}
```

Create

Implement a form with a field for title, body (description) and image. Also add an image preview. Add states for every field including and error message state.

```
export default function CreatePage() {
  const [title, setTitle] = useState("");
  const [body, setBody] = useState("");
  const [image, setImage] = useState("");
  const [errorMessage, setErrorMessage] = useState("");

  return (
    <form onSubmit={handleSubmit}>
      <label>
        Title
        <input type="text" value={title} placeholder="Type a title" onChange={e => setTitle(e.target.value)} />
      </label>
      <label>
        Body
        <input type="text" value={body} placeholder="Type a body text" onChange={e => setBody(e.target.value)} />
      </label>
      <label>
        Image
        <input type="file" className="file-input" accept="image/*" onChange={handleImageChange} />
        <img className="image-preview" src={image} alt="Choose" onError={event => (event.target.src = imgPlaceholder)} />
      </label>
      <p className="text-error">{errorMessage}</p>
      <button type="submit">Save</button>
    </form>
  );
}
```

Create

Implement handleImageChange

```
/**  
 * handleImageChange is called every time the user chooses an image in the fire system.  
 * The event is fired by the input file field in the form  
 */  
function handleImageChange(event) {  
    const file = event.target.files[0];  
    if (file.size < 500000) {  
        // image file size must be below 0,5MB  
        const reader = new FileReader();  
        reader.onload = event => {  
            setImage(event.target.result);  
        };  
        reader.readAsDataURL(file);  
        setErrorMessage(""); // reset errorMessage state  
    } else {  
        // if not below 0.5MB display an error message using the errorMessage state  
        setErrorMessage("The image file is too big!");  
    }  
}
```

Create

onSubmit call handleSubmit. The function creates a new post object based on the states. Also add a hardcoded uid = "fTs84KR0Yw5pRZEWCq2Z"
Use fetch and post to post the new post object to the data source.

```
async function handleSubmit() {
  const newPost = {
    title: title,
    body: body,
    image: image,
    uid: "fTs84KR0Yw5pRZEWCq2Z" // default user id added
};

const url = "https://race-rest-default-rtdb.firebaseio.com/posts.json";
const response = await fetch(url, {
  method: "POST",
  body: JSON.stringify(newPost)
});
const data = await response.json();
console.log(data);
navigate("/");
}
```

Update

Using PUT to an
existing post object
by given id.

You have two options:

- Implement an update form similar to the create form.
- Or implement a PostForm component you can reuse for CreatePage and UpdatePage.

Update

PostForm

Component #1

```
import { useEffect, useState } from "react";
import imgPlaceholder from "../assets/img/img-placeholder.jpg";

export default function PostForm({ savePost, post }) {
  const [title, setTitle] = useState("");
  const [body, setBody] = useState("");
  const [image, setImage] = useState("");
  const [errorMessage, setErrorMessage] = useState("");

  useEffect(() => {
    if (post) {
      // if post, set the states with values from the post object.
      // The post object is a prop, passed from UpdatePage
      setTitle(post.title);
      setBody(post.body);
      setImage(post.image);
    }
  }, [post]); // useEffect is called every time post changes.

  /**
   * handleImageChange is called every time the user chooses an image in the fire system.
   * The event is fired by the input file field in the form
   */
  function handleImageChange(event) {
    const file = event.target.files[0];
    if (file.size < 500000) {
      // image file size must be below 0,5MB
      const reader = new FileReader();
      reader.onload = event => {
        setImage(event.target.result);
      };
      reader.readAsDataURL(file);
      setErrorMessage(""); // reset errorMessage state
    } else {
      // if not below 0.5MB display an error message using the errorMessage state
      setErrorMessage("The image file is too big!");
    }
  }
}
```

Update

PostForm

Component #2

```
function handleSubmit(event) {
  event.preventDefault();
  const formData = {
    // create a new object to hold the value from states / input fields
    title: title,
    image: image,
    body: body
  };

  const validForm = formData.title && formData.body && formData.image; // will return false if one of the properties doesn't have a value
  if (validForm) {
    // if all fields/ properties are filled, then call savePost
    savePost(formData);
  } else {
    // if not, set errorMessage state.
    setErrorMessage("Please, fill in all fields.");
  }
}

return (
  <form onSubmit={handleSubmit}>
    <label>
      Title
      <input type="text" value={title} placeholder="Type a title" onChange={e => setTitle(e.target.value)} />
    </label>
    <label>
      Body
      <input type="text" value={body} placeholder="Type a body text" onChange={e => setBody(e.target.value)} />
    </label>
    <label>
      Image
      <input type="file" className="file-input" accept="image/*" onChange={handleImageChange} />
        <img className="image-preview" src={image} alt="Choose" onError={event => (event.target.src = imgPlaceholder)} />
    </label>
    <p className="text-error">{errorMessage}</p>
    <button type="submit">Save</button>
  </form>
);
}
```

Update

CreatePage Component

```
import { useNavigate } from "react-router-dom";
import PostForm from "../components/PostForm";

export default function CreatePage({ showLoader }) {
  const navigate = useNavigate();

  async function createPost(newPost) {
    newPost.uid = "fTs84KR0Yw5pRZEWCq2Z"; // default user id added

    const url = "https://race-rest-default-firebase.firebaseio.com/posts.json";
    const response = await fetch(url, {
      method: "POST",
      body: JSON.stringify(newPost)
    });
    const data = await response.json();
    console.log(data);
    navigate("/");
  }

  return (
    <section className="page">
      <h1>Create New Post</h1>
      <PostForm savePost={createPost} />
    </section>
  );
}
```

Update

UpdatePage Component

```
import { useEffect, useState } from "react";
import { useNavigate, useParams } from "react-router-dom";
import PostForm from "../components/PostForm";

export default function UpdatePage() {
  const [post, setPost] = useState({});
  const params = useParams();
  const navigate = useNavigate();
  const url = `https://race-rest-default-firebase.com/posts/${params.postId}.json`;

  useEffect(() => {
    async function getPost() {
      const response = await fetch(url);
      const data = await response.json();
      setPost(data);
    }

    getPost();
  }, [url]);

  async function savePost(postToUpdate) {
    const response = await fetch(url, {
      method: "PUT",
      body: JSON.stringify(postToUpdate)
    });
    const data = await response.json();
    console.log(data);
    navigate("/");
  }

  return (
    <section className="page">
      <h1>Update Post</h1>
      <PostForm post={post} savePost={savePost} />
    </section>
  );
}
```

Delete

Using DELETE to an object
by a given id.
Add deletePost logic in
UpdatePage component.

```
import { useEffect, useState } from "react";
import { useNavigate, useParams } from "react-router-dom";
import PostForm from "../components/PostForm";

export default function UpdatePage() {
  const [post, setPost] = useState({});
  const params = useParams();
  const navigate = useNavigate();
  const url = `https://race-rest-default-firebase.firebaseio.com/posts/${params.postId}.json`;


  useEffect(() => {
    // ...
  }, [url]);

  async function savePost(postToUpdate) {
    // ...
  }

  async function deletePost() {
    const confirmDelete = window.confirm(`Do you want to delete post, ${post.title}?`);
    if (confirmDelete) {
      const response = await fetch(url, {
        method: "DELETE"
      });
      const data = await response.json();
      console.log(data);
      navigate("/");
    }
  }

  return (
    <section className="page">
      <h1>Update Post</h1>
      <PostForm post={post} savePost={savePost} />
      <button className="btn-delete" onClick={deletePost}>
        Delete Post
      </button>
    </section>
  );
}
```


Solution Proposal

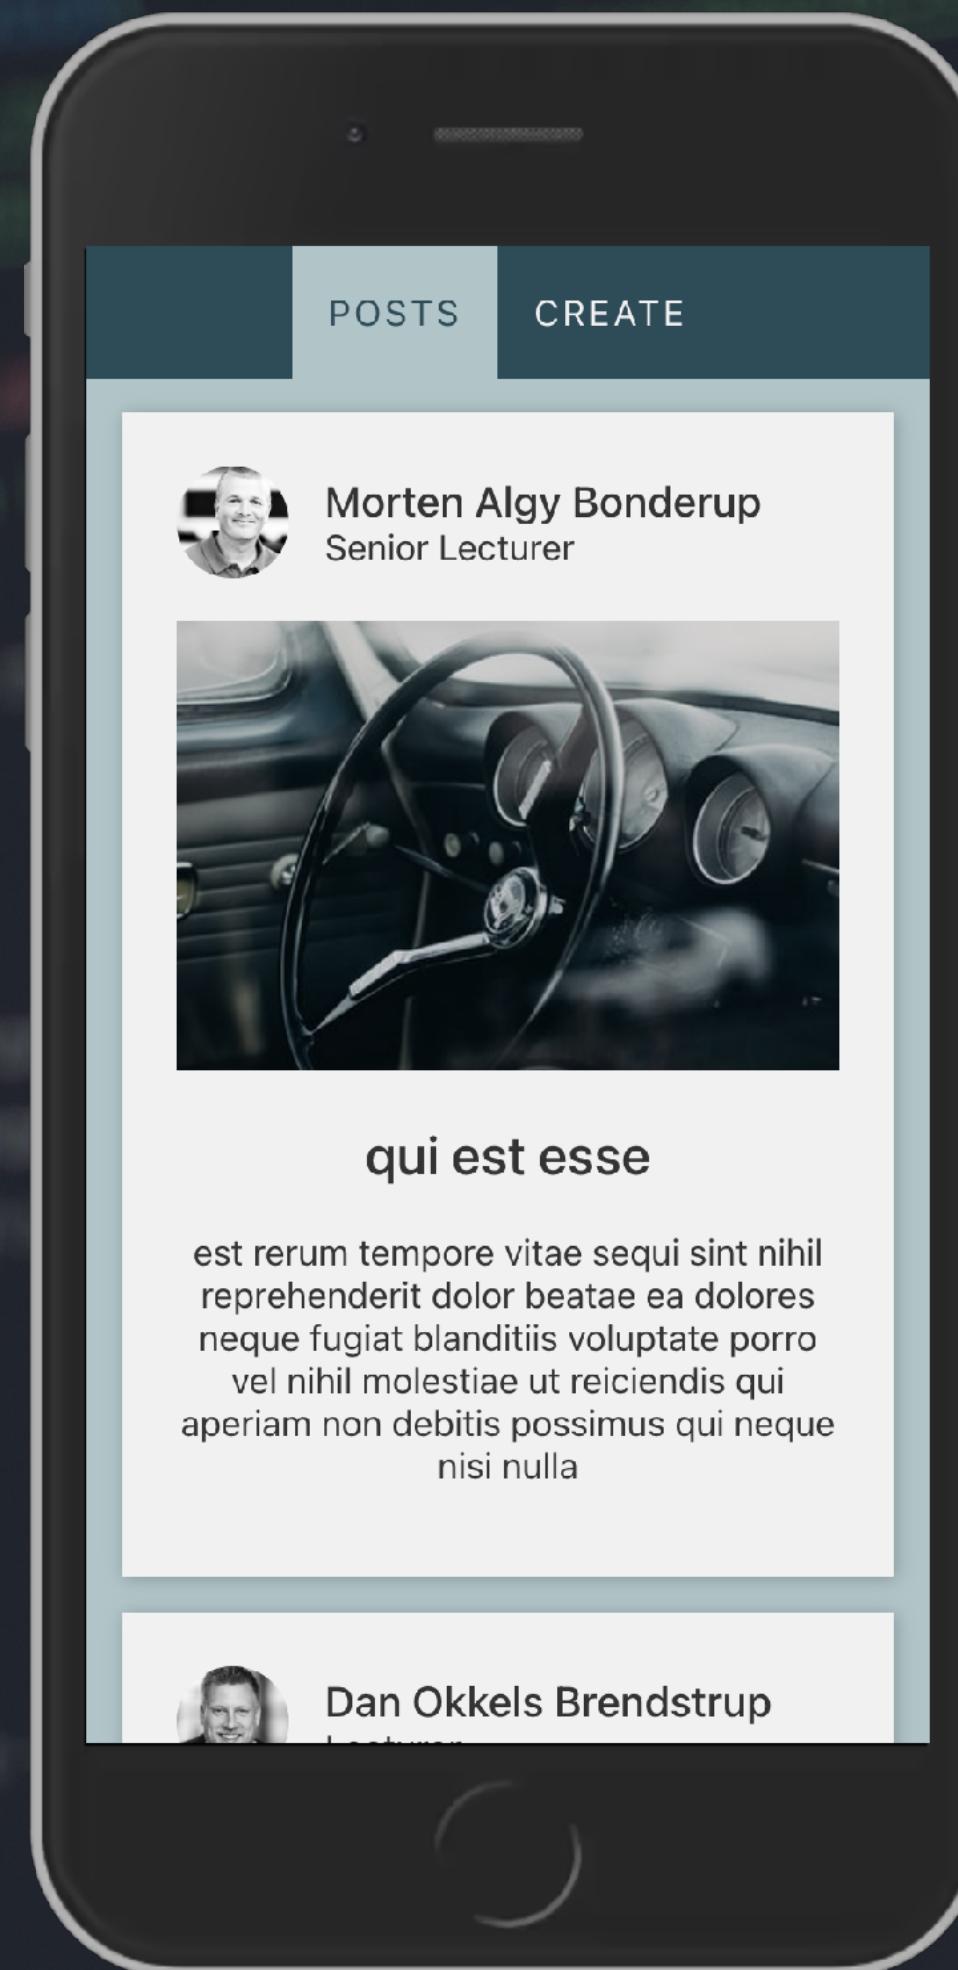

- <https://github.com/cederdorff/react-vite-crud-app>
(main **branch**, `post-form-component` **branch**
and `search-and-filter` **branch**)
- [https://github.com/cederdorff/react-vite-crud-app-
cloud-storage](https://github.com/cederdorff/react-vite-crud-app-cloud-storage)
- Running solution
- Data Sources:
 - posts
 - users

But RACE, how do you know all that stuff?


- [React Resources](#)
- [React Self-study](#)
- [Guides & Tutorials](#)
- [From Vanilla JavaScript to React Developer](#)

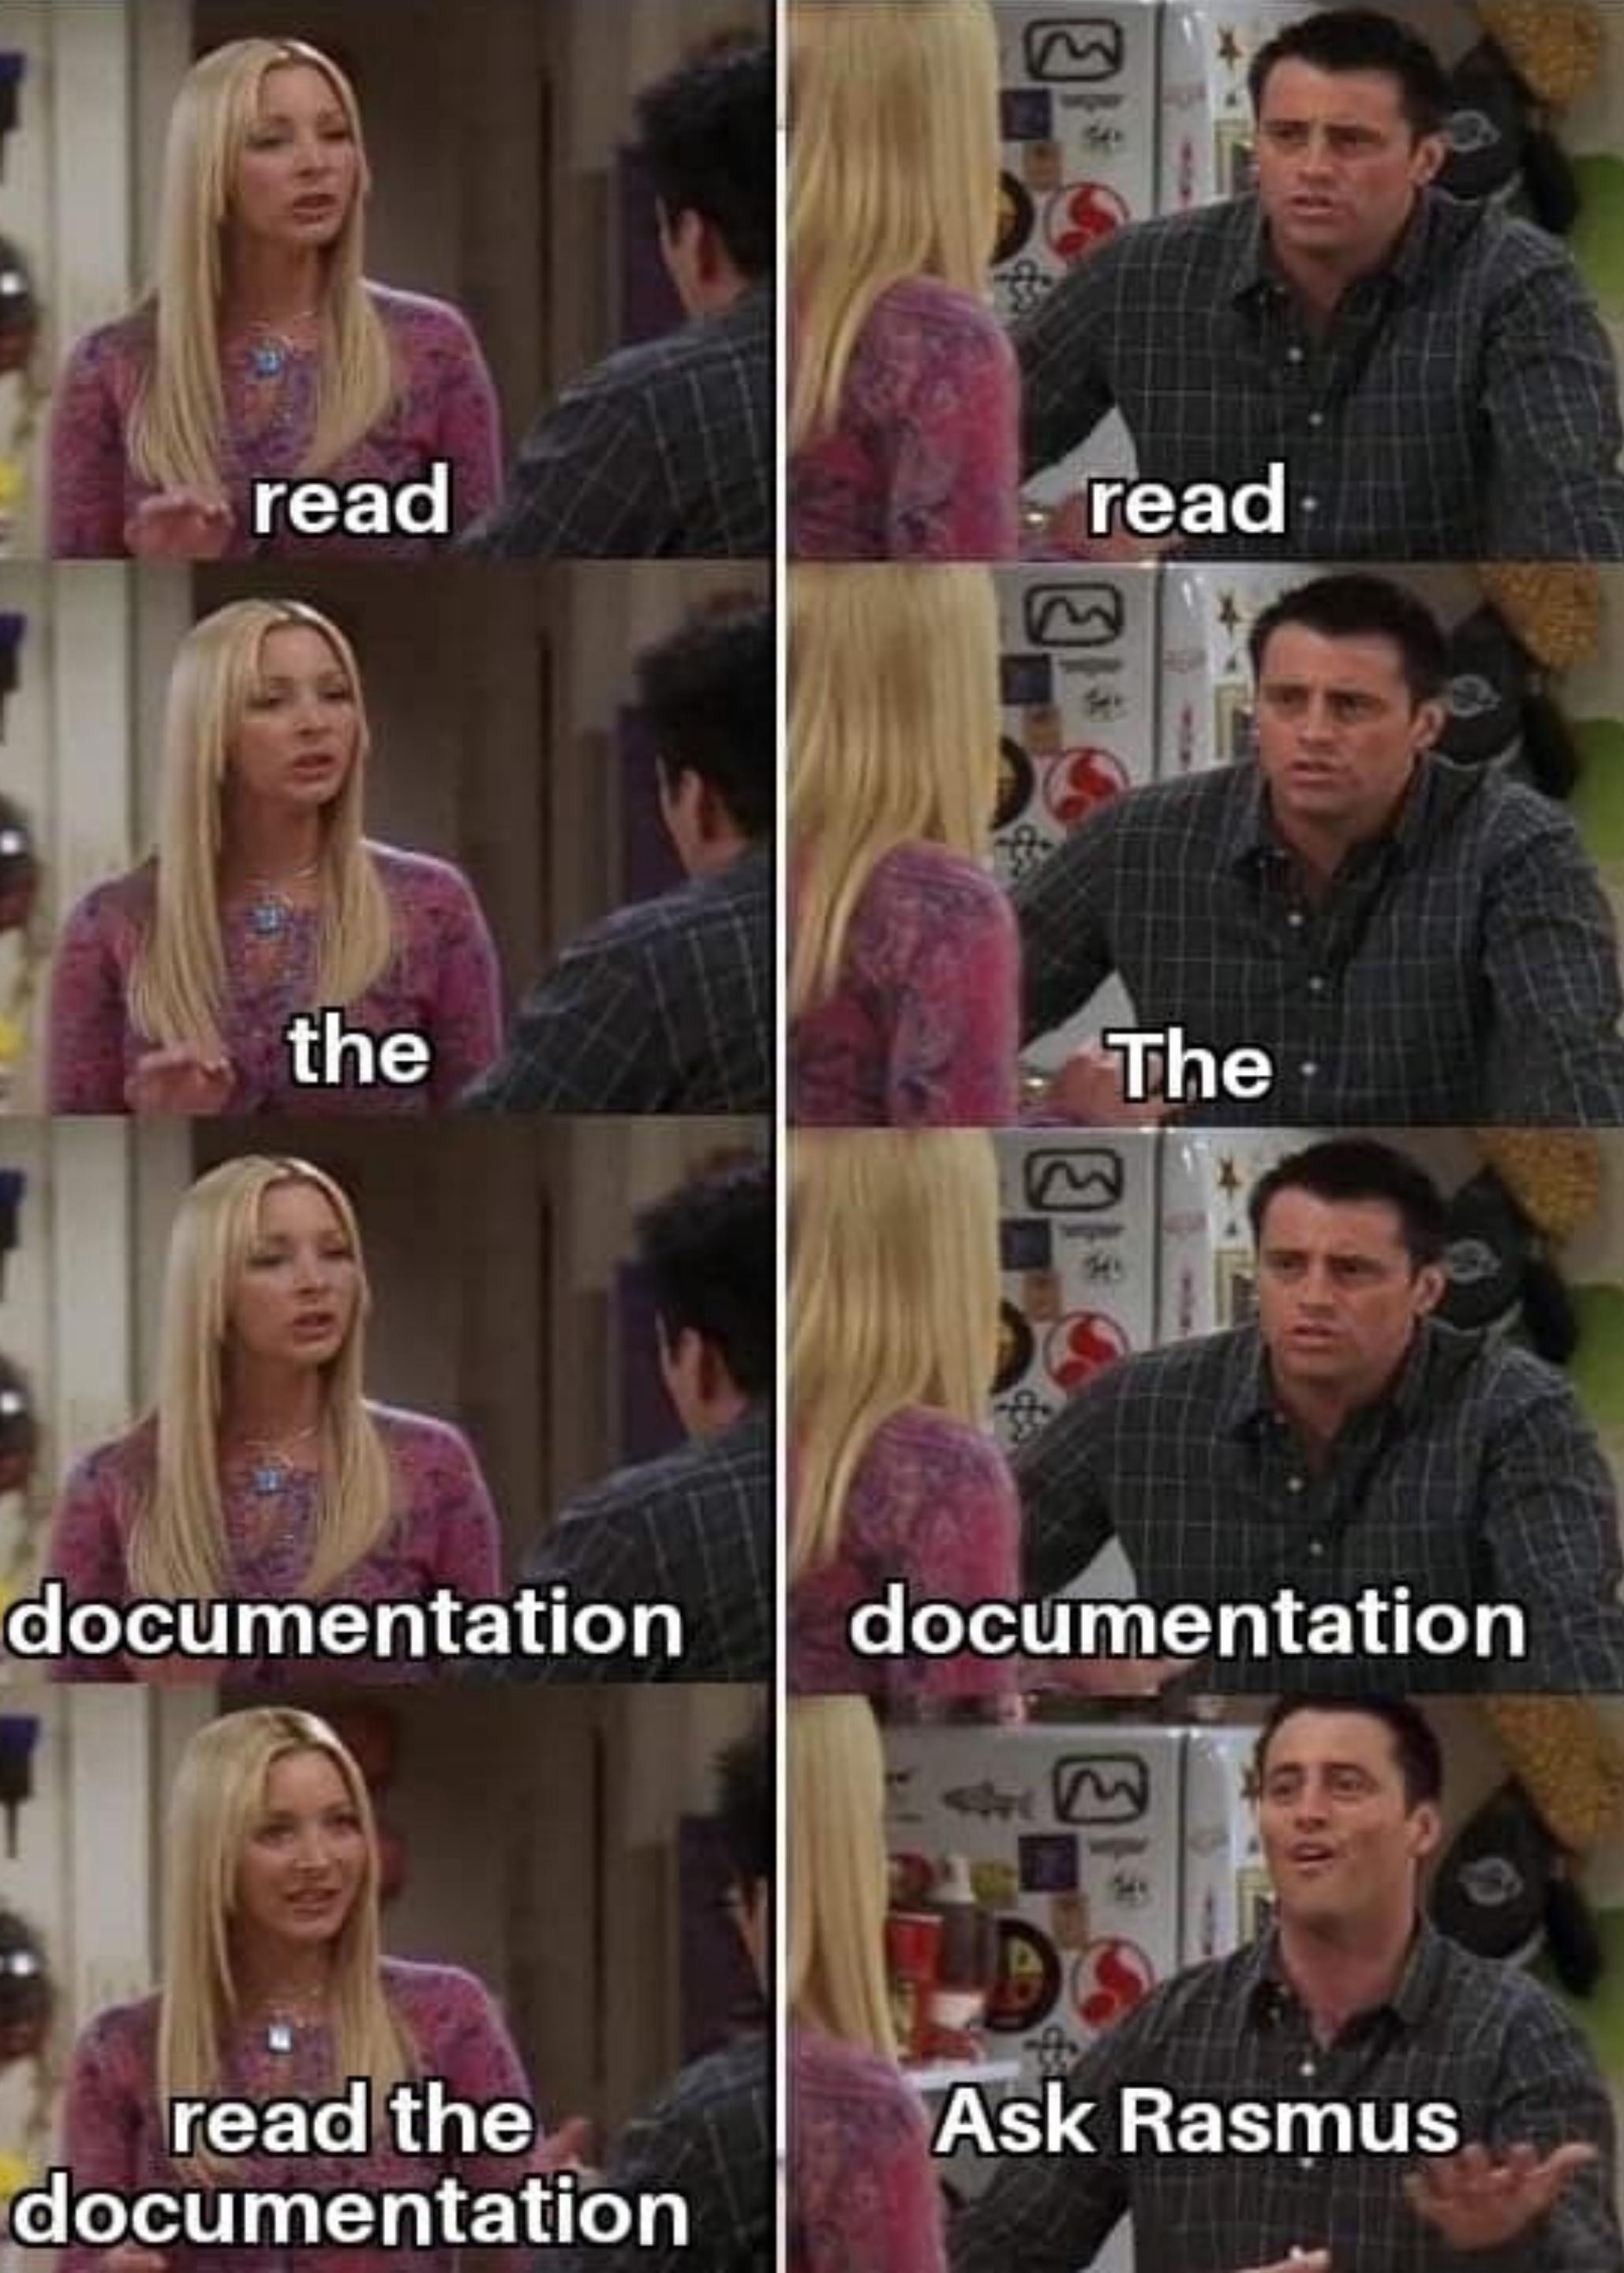

React Practice

Practice your React knowledge with `create-react-app` and [react-router](#):

1. Build a Portfolio site template with pages (components) like Home, Projects, About and Contact.
2. Do a remake of Canvas Users SPA with React.
Inspiration on GitHub: `react-starters` and `react-cdn-starters`
3. Checkout [React Self-study](#) and [Guides & Tutorials](#)

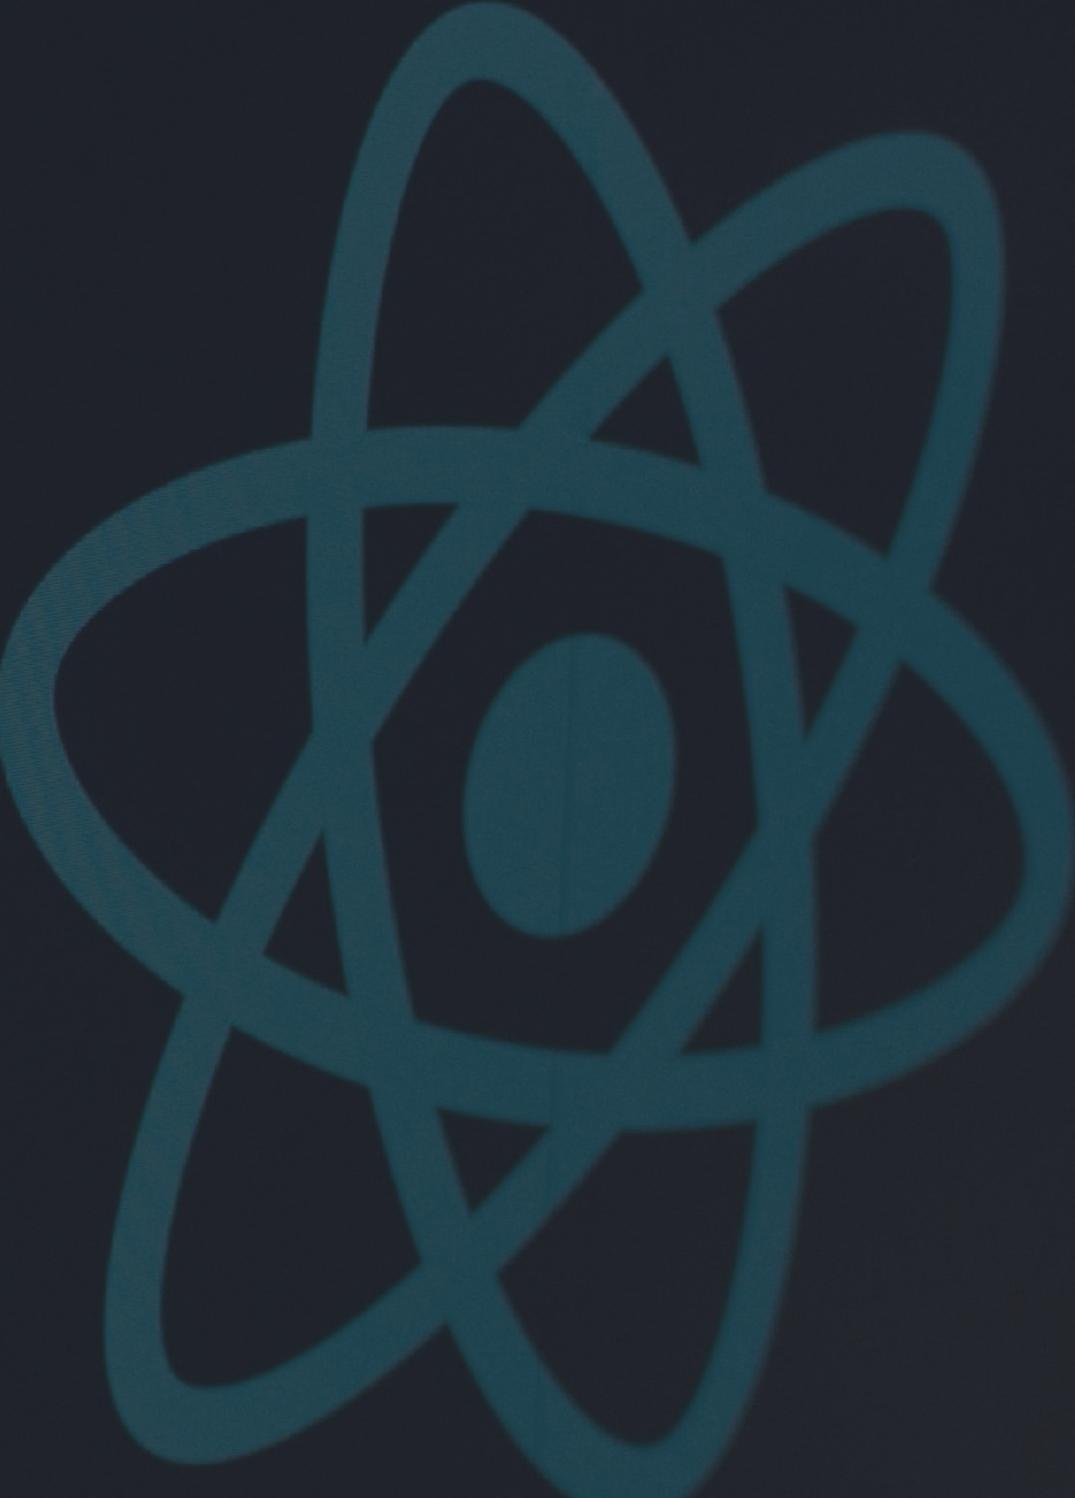

Edit `src/App.js` and save to reload
Learn React

Code Every Day

Edit [src/App.js](#) and save to reload
[Learn React](#)

