





NETWORKING

SERVICES

POD

**SERVICE**



**POD**





```
1     apiVersion: v1
2     kind: Service
3     metadata:
4         name: kuard-service
5     spec:
6         selector:
7             app: kuard
8         ports:
9             - port: 80
10             targetPort: 8080
```

```
1  apiVersion: apps/v1
2  kind: Deployment
3  metadata:
4    name: kuard-deployment
5    labels:
6      app: kuard
7  spec:
8    replicas: 3
9    selector:
10     matchLabels:
11       app: kuard
12   template:
13     metadata:
14       labels:
15         app: kuard
16     spec:
17       containers:
18         - image: gcr.io/kuar-demo/kuard-amd64:blue
19           name: kuard
20           ports:
21             - containerPort: 8080
22               name: http
```














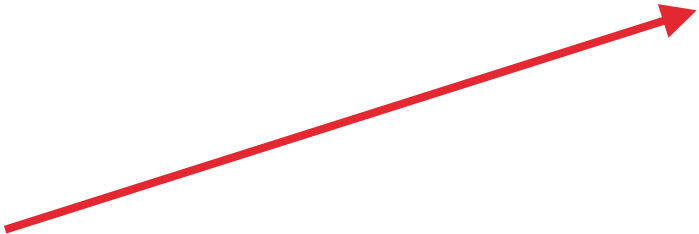

# SERVICES

```
1  apiVersion: v1
2  kind: Service
3  metadata:
4    name: kuard-service
5  spec:
6    selector:
7      app: kuard
8  ports:
9    - port: 80
10     targetPort: 8080
```

```
1  apiVersion: apps/v1
2  kind: Deployment
3  metadata:
4    name: kuard-deployment
5    labels:
6      app: kuard
7  spec:
8    replicas: 3
9    selector:
10     matchLabels:
11       app: kuard
12   template:
13     metadata:
14       labels:
15         app: kuard
16   spec:
17     containers:
18       - image: gcr.io/kuar-demo/kuard-amd64:blue
19         name: kuard
20     ports:
21       - containerPort: 8080
22         name: http
```



# HOW TO SERVE CUSTOMER TRAFFIC

