


Q1. Créez la base de données lycee

```
symfony : commande introduite
sio@mint-vm:~$ docker exec -it symfony-docker-php-1 bash
root@f2f1a8d51510:/app# symfony console doctrine:database:create
Could not create database "lycee" for connection named default
An exception occurred while executing a query: SQLSTATE[42P04]: Duplicate database: 7 ERROR: database "lycee" already exists
root@f2f1a8d51510:/app#
```

Q2. Créez l'entité Etudiant

• 3.3. Rechercher une donnée

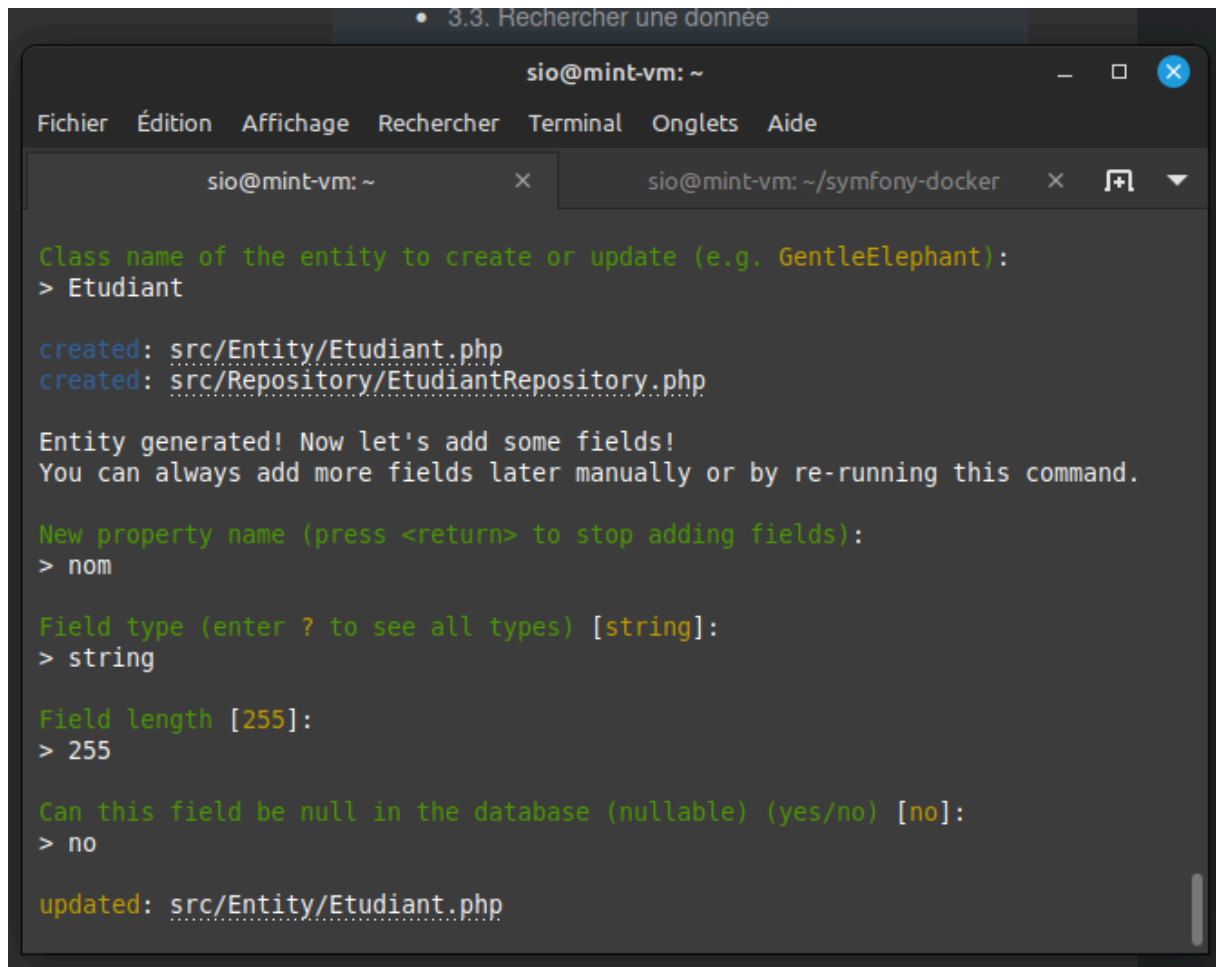

```
sio@mint-vm: ~
Fichier  Édition  Affichage  Rechercher  Terminal  Onglets  Aide

sio@mint-vm: ~  x  sio@mint-vm: ~/symfony-docker  x  [+/-]  ▼

Class name of the entity to create or update (e.g. GentleElephant):
> Etudiant

created: src/Entity/Etudiant.php
created: src/Repository/EtudiantRepository.php

Entity generated! Now let's add some fields!
You can always add more fields later manually or by re-running this command.

New property name (press <return> to stop adding fields):
> nom

Field type (enter ? to see all types) [string]:
> string

Field length [255]:
> 255

Can this field be null in the database (nullable) (yes/no) [no]:
> no

updated: src/Entity/Etudiant.php
```

```

Add another property? Enter the property name (or press <return> to stop adding fields):
> prenom

Field type (enter ? to see all types) [string]:
> string

Field length [255]:
> 255

Can this field be null in the database (nullable) (yes/no) [no]:
> no

updated: src/Entity/Etudiant.php

```

```

Add another property? Enter the property name (or press <return> to stop adding fields):
> naissance

Field type (enter ? to see all types) [string]:
> ?

Main Types
* string or ascii_string
* text
* boolean
* integer or smallint or bigint
* float

Relationships/Associations
* relation a wizard 🧙 will help you build the relation
* ManyToOne
* OneToMany
* ManyToMany
* OneToOne

Array/Object Types
* array or simple_array
* json
* object
* binary
* blob

Date/Time Types
* datetime or datetime_immutable
* datetimetz or datetimetz_immutable
* date or date_immutable
* time or time_immutable
* dateinterval

Other Types
* enum
* decimal
* guid

Field type (enter ? to see all types) [string]:
> date

Can this field be null in the database (nullable) (yes/no) [no]:
> yes

updated: src/Entity/Etudiant.php

```

```

Add another property? Enter the property name (or press <return> to stop adding fields):
> niveau

Field type (enter ? to see all types) [string]:
> integer

Can this field be null in the database (nullable) (yes/no) [no]:
> no

updated: src/Entity/Etudiant.php

Add another property? Enter the property name (or press <return> to stop adding fields):
> <return>

```

La table a bien été créée

Colonne	Type	Commentaire
id	integer	
nom	character varying(255)	
prenom	character varying(255)	
naissance	date <i>NULL</i>	
niveau	integer	

Q3. Créez maintenant une nouvelle entité Test avec des colonnes quelconques.

```
root@f2f1a8d51510:/app# symfony console make:entity

Class name of the entity to create or update (e.g. TinyChef):
> Test

created: src/Entity/Test.php
created: src/Repository/TestRepository.php

Entity generated! Now let's add some fields!
You can always add more fields later manually or by re-running this command.

New property name (press <return> to stop adding fields):
> niveau

Field type (enter ? to see all types) [string]:
> integer

Can this field be null in the database (nullable) (yes/no) [no]:
> no

updated: src/Entity/Test.php

Add another property? Enter the property name (or press <return> to stop adding fields):
> test_1

Field type (enter ? to see all types) [string]:
> string

Field length [255]:
> 255

Can this field be null in the database (nullable) (yes/no) [no]:
> no


updated: src/Entity/Test.php

Add another property? Enter the property name (or press <return> to stop adding fields):
>

Success!
```

Colonne	Type	Commentaire
id	integer	
niveau	integer	
test_1	character varying(255)	

Q4 Supprimez maintenant la table et refaite make :migration que deviens la table test

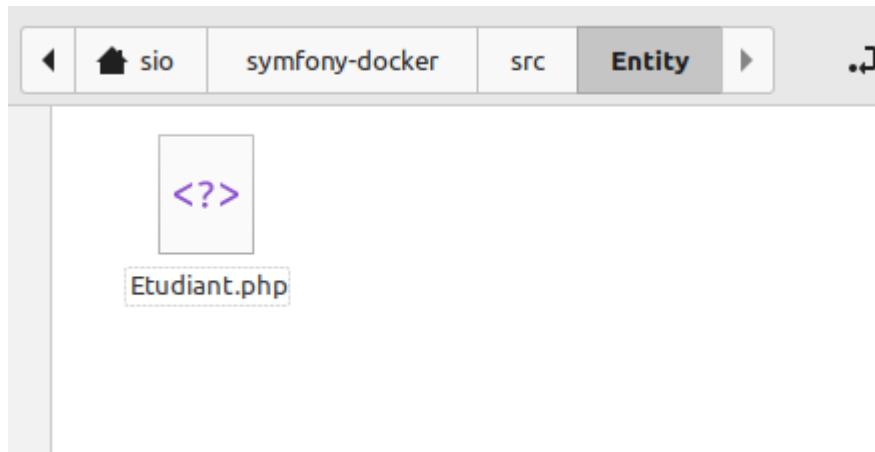


☐	Table	Moteur	Interclassement	Longueur des données?	Longueur de l'index?	Espace inutilisé	Incrément automatique	Lignes?	Commentaire?
☐	doctrine_migration_versions	table		8,192	16,384	?	?	-1	
☐	etudiant	table		0	16,384	?	?	-1	
	2 au total		en_US.utf8	8,192	32,768	0			

La table test a bien été supprimer

Q5. Modifiez etudiant et ajouter mail long de 100 caractere , non null

Colonne	Type	Commentaire
id	integer	
nom	character varying(255)	
prenom	character varying(255)	
naissance	date <i>NULL</i>	
niveau	integer	
mail	character varying(100) <i>NULL</i>	

Q6.

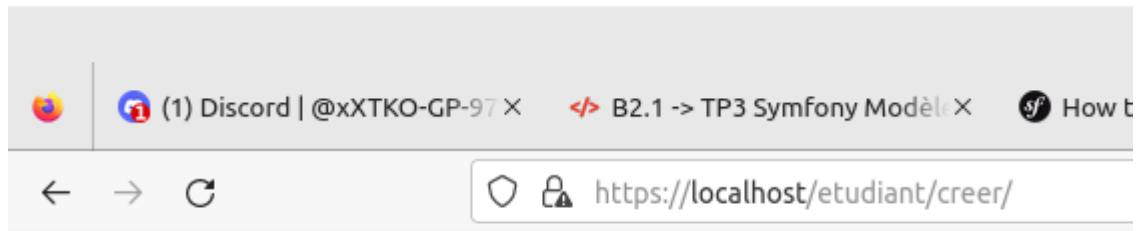

Nouvel étudiant sauvegardé, ID 1

```
sio@mint-vm:~/symfony-docker$ docker exec symfony-docker-php-1 bash
sio@mint-vm:~/symfony-docker$ docker exec -it symfony-docker-php-1 bash
root@f2f1a8d51510:/app# symfony console dbal:run-sql 'SELECT * FROM etudiant'
```

id	nom	prenom	naissance	niveau	mail
1	JOHN	Lee	2004-09-13	1	

```
root@f2f1a8d51510:/app#
```

```

{% extends 'base.html.twig' %}

{% block title %}Recherche par nom{% endblock %}

{% block body %}
    <h1>Résultats de la recherche pour l'etudiant </h1>

    {% if etudiants is empty %}
        <p> Il vous manque le nom de l'etudiant </p>
    {% else %}
        <table>
            <thead>
                <tr>
                    <th>ID</th>
                    <th>nom</th>
                    <th>prenom</th>
                    <th>naissance</th>
                    <th>niveau</th>
                </tr>
            </thead>
            <tbody>
                {% for etudiant in etudiants %}
                    <tr>
                        <td>{{ etudiant.id }}</td>
                        <td>{{ etudiant.nom }}</td>
                        <td>{{ etudiant.prenom }}</td>
                        <td>{{ etudiant.naissance|date('d/m/Y') }}</td>
                        <td>{{ etudiant.niveau }}</td>
                    </tr>
                {% endfor %}
            </tbody>
        </table>
    {% endif %}
{% endblock %}

```

Q7.

```

root@f2f1a8d51510:/app# symfony console make:form

The name of the form class (e.g. GentlePuppyType):
> Etudiant

The name of Entity or fully qualified model class name that the new form will be bound to (empty for none):
> Etudiant

created: src/Form/EtudiantType.php

```

Q8

```

<?php

namespace App\Form;

use App\Entity\Etudiant;
use Symfony\Component\Form\AbstractType;
use Symfony\Component\Form\FormBuilderInterface;
use Symfony\Component\OptionsResolver\OptionsResolver;
use Symfony\Component\Form\Extension\Core\Type\SubmitType;

class EtudiantType extends AbstractType
{
    public function buildForm(FormBuilderInterface $builder, array $options): void
    {
        $builder
            ->add('nom')
            ->add('prenom')
            ->add('naissance', null, [
                'widget' => 'single_text',
            ])
            ->add('niveau')
            ->add('envoyer', SubmitType::class);
    }

    public function configureOptions(OptionsResolver $resolver): void
    {
        $resolver->setDefaults([
            'data_class' => Etudiant::class,
        ]);
    }
}

```

Q9

```

}
#[Route('/etudiant/saisirEtudiant')]
public function select(Request $req) {
    // Création du formulaire
    $form = $this->createForm(EtudiantType::class);
    $form->handleRequest($req);

    // Vérifie si le formulaire a été soumis et est valide
    if ($form->isSubmitted() && $form->isValid()) {
        // Récupère les données soumises
        $dataFormulaire = $form->getData();

        // Récupère la valeur d'un champ spécifique du formulaire
        $retour['variable'] = $dataFormulaire['variable_dans_formulaire'];

        // Redirige vers une autre route avec les données passées
        return $this->redirectToRoute('/etudiant/saisirEtudiant', $retour);
    }

    // Si le formulaire n'a pas été soumis ou est invalide, affiche le formulaire
    return $this->render('etudiant/rechercher_nom.html.twig', [
        'form' => $form->createView(),
    ]);
}

```

Q10

```

$etudiant = new Etudiant();
$form = $this->createForm(SaisieEtudiantType::class, $etudiant);

```