Does unequal K information change the calibrated recovery comparison?

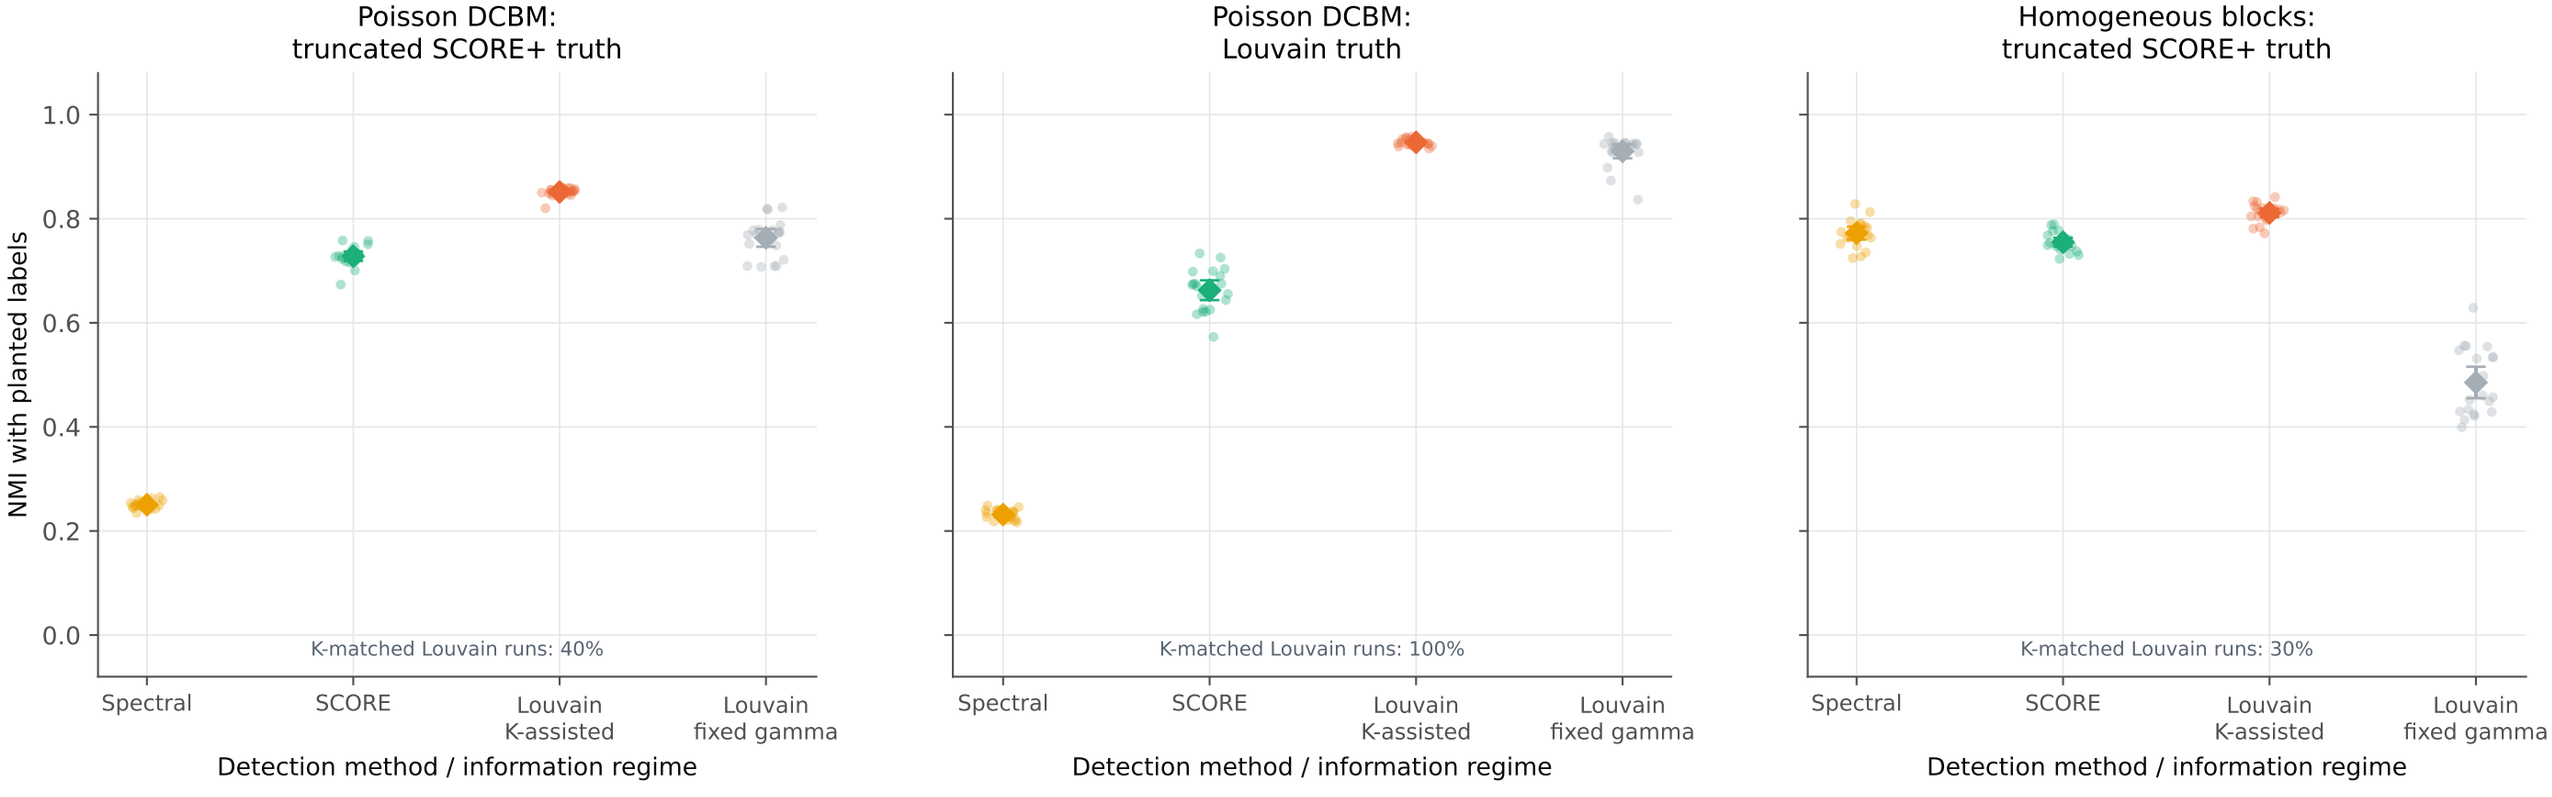

20 reproduced legacy graphs per setting; all methods evaluated on identical retained users in each graph.
Louvain K assistance selects resolution using graph cluster counts only, never membership truth. Actual K matches are recorded.
Points: individual graphs; diamonds/bars: mean and pointwise Monte Carlo 95% interval. These are generator-conditional recovery results.