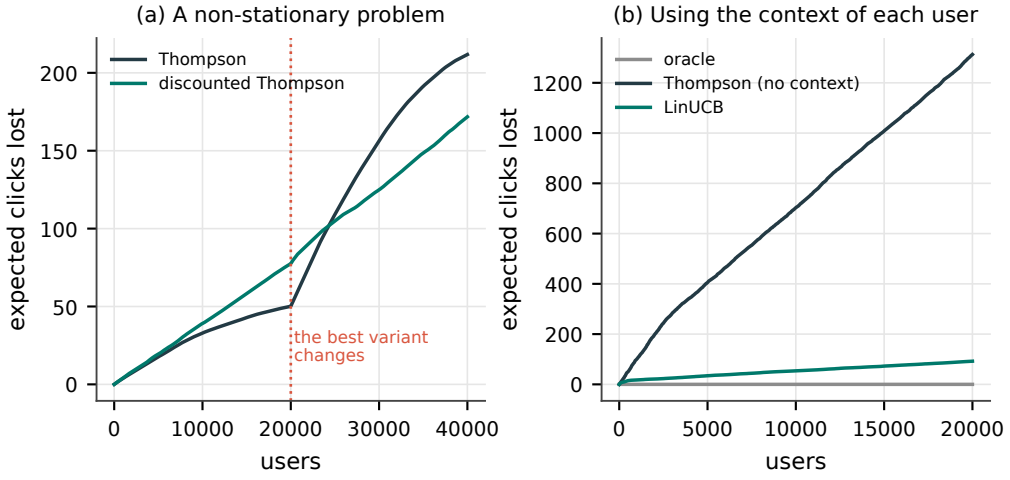
(a) A non-stationary problem
Thompson
discounted Thompson
the best variant changes
expected clicks lost
users
0
50
100
150
200
0
10000
20000
30000
40000
(b) Using the context of each user
oracle
Thompson (no context)
LinUCB
expected clicks lost
users
0
200
400
600
800
1000
1200
0
5000
10000
15000
20000