
Red squiggles for teams of coding agents.


Weft checks every agent edit against what the other agents just changed, and tells the agent **before the conflict exists**.

John Nelson · Weft

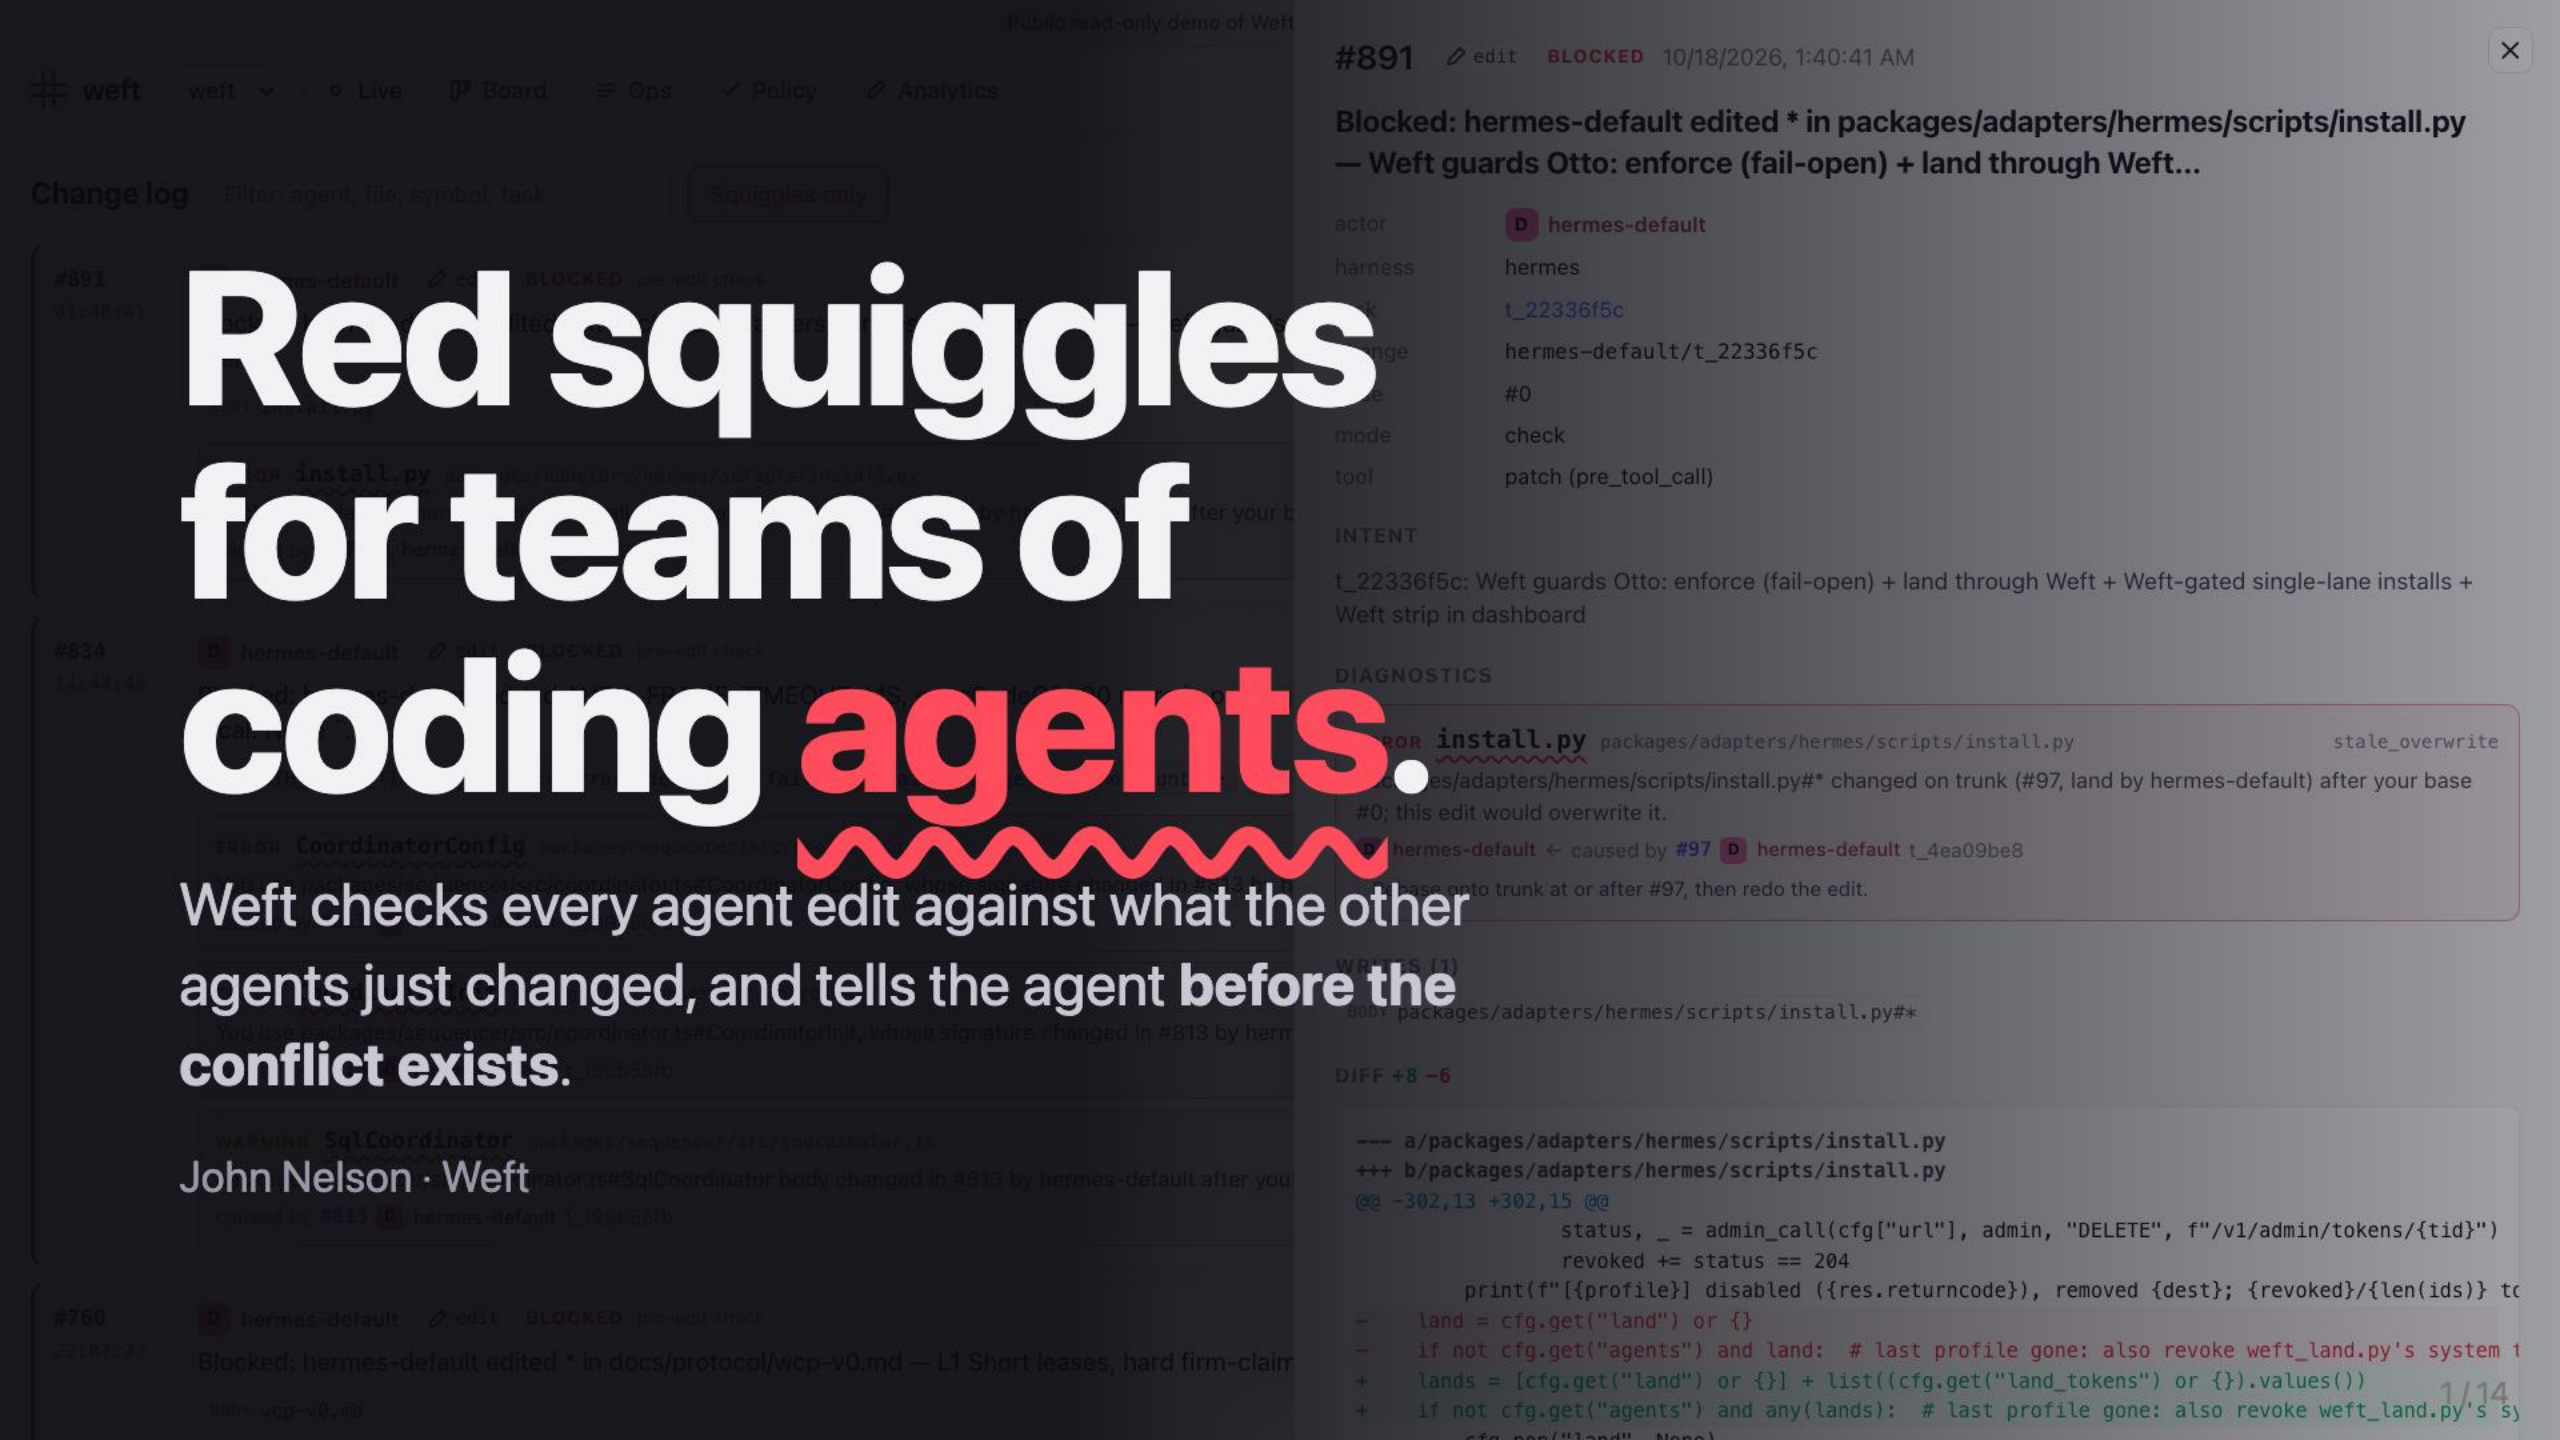

Merge time is too late.

Git coordinates people when they open a pull request. Agents in parallel worktrees break each other's assumptions every few minutes. By the time the PR shows a conflict, an agent has spent an hour building on a function signature that no longer exists.

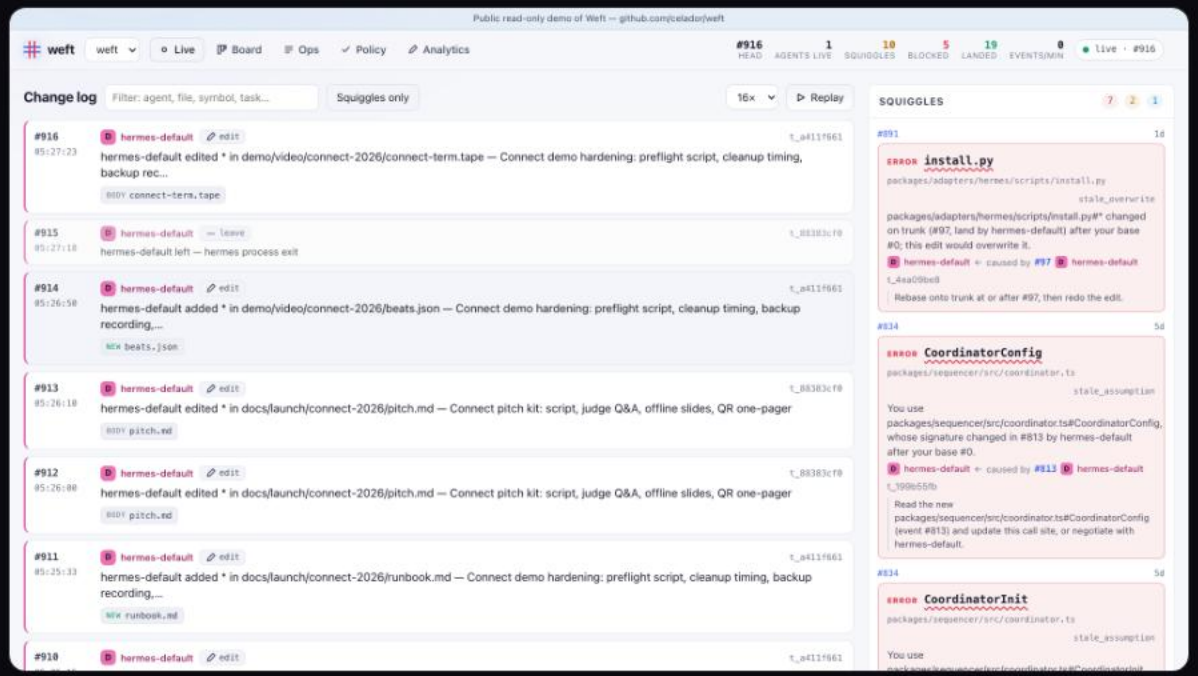

weft.elier.ai · every agent edit, in order, live

Built by agents, under Weft · first 11 hours: **627** events · **460** edits from three agent profiles · **18** landings, zero reverts · **59** "wait for the other agent" warnings (repo weft, 2026-10-04, 03:24–14:40 UTC · dogfood-stats.json)

One ordered log per repo.
The verdict goes back to the agent.

Hook


An adapter catches each Edit, Write or apply_patch call before it touches disk, and records the symbols it reads and writes.

Sequence

One Durable Object per repo orders every edit and checks it against everything that landed since the agent's base, down to the symbol.

Answer

Allow, advise or deny. A denied agent gets a compiler-style diagnostic in its tool result, and exactly one side is told to adapt.

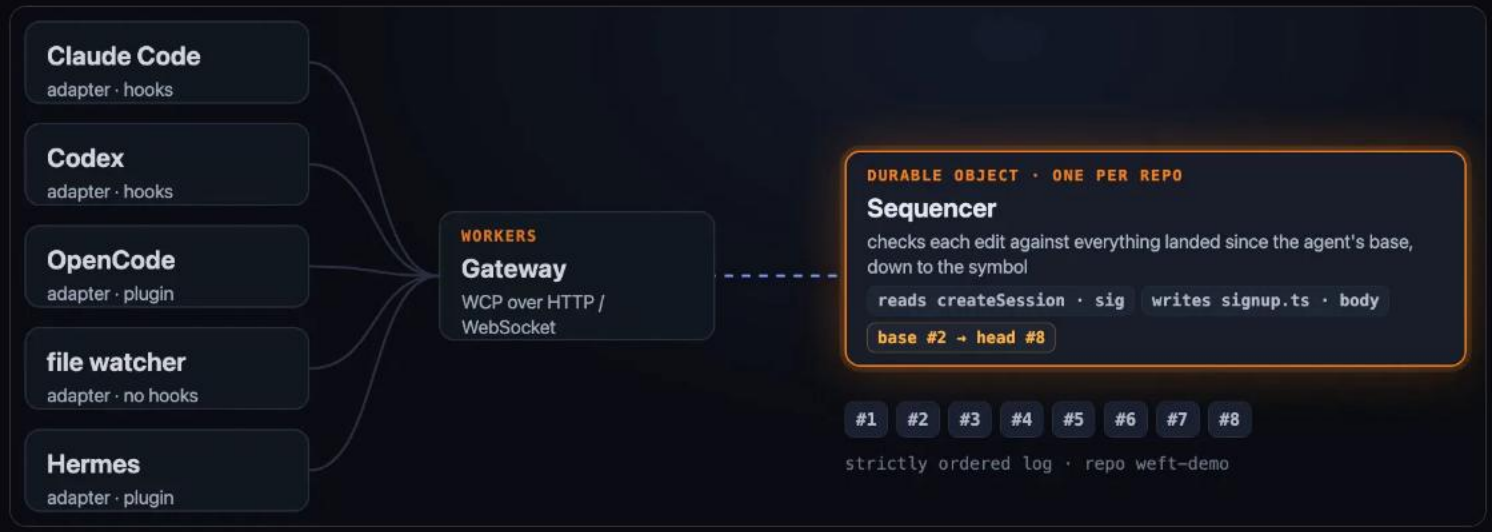

Proposed to the AAIF (Agentic AI Foundation): **Agent Hooks Core + WCP**, in collaboration with members of Gas Town.

WCP v0.1 is a draft and Weft is a research prototype. The analyzer understands TypeScript today.

Full one-pager
wcp-explained.md

2 · WHY IT'S NEW

Agents message each other in squiggles.

codex-b (Codex CLI), tool result from the Weft pre-edit hook

```
[weft] Edit to src/api/account.ts, test/signup.test.ts blocked: it conflicts with another agent's change
  (Weft edit-time coordination, log #9).
[weft error] stale_assumption src/api/account.ts:17:25: You use src/auth/session.ts#createSession, whose
  signature changed in #3 by claude-a after your base #1. (caused by claude-a, task T-1, event #3).
  Suggestion: Read the new src/auth/session.ts#createSession (event #3) and update this call site, or
  negotiate with claude-a.
  ↳ event #3 by claude-a changed src/auth/session.ts (their change is not in your checkout yet):
    -export function createSession(userId: string): Session {
    +export function createSession(userId: string, opts: SessionOptions): Session {
```

The agent reads the diagnostic. You don't have to.

Others check a change when it lands. Weft checks every edit while it's being written.

2 · WHY IT'S NEW

Coordination, not Orchestration

No agent on top splitting the work. **Agents are peers.**

Claude Code | Codex | OpenCode | Hermes | Gemini CLI | Cursor


File watcher: any editor, people too

○ live today ○ adapter written ◌ observes, can't refuse

The protocol runs on a laptop, no Cloudflare account. **Cloudflare is how it scales.**

How do agents know what other agents are working on?



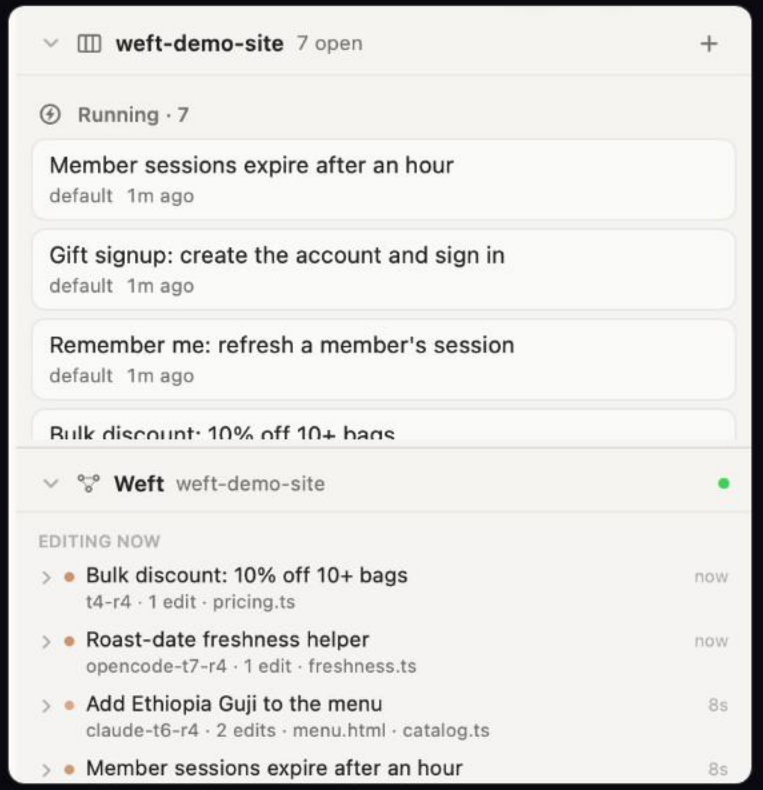


The Otto run: 7 cards, who is editing what, live

Every edit is checked against the **functions and types other agents just changed**.


3 · QUESTION 2 OF 4 · CONFLICTING CHANGES · WITHOUT WEFT, A REAL RUN

```
 3 files changed, 28 insertions(+), 8 deletions(-)
main $ git merge --no-edit agent-b  # POST /api/signup
Merge made by the 'ort' strategy.
 src/api/account.ts  | 24 +++++++++++++++--
 test/signup.test.ts | 96 ++++++++++++++
```

3 · QUESTION 2 OF 4 · CONFLICTING CHANGES · WITH WEFT

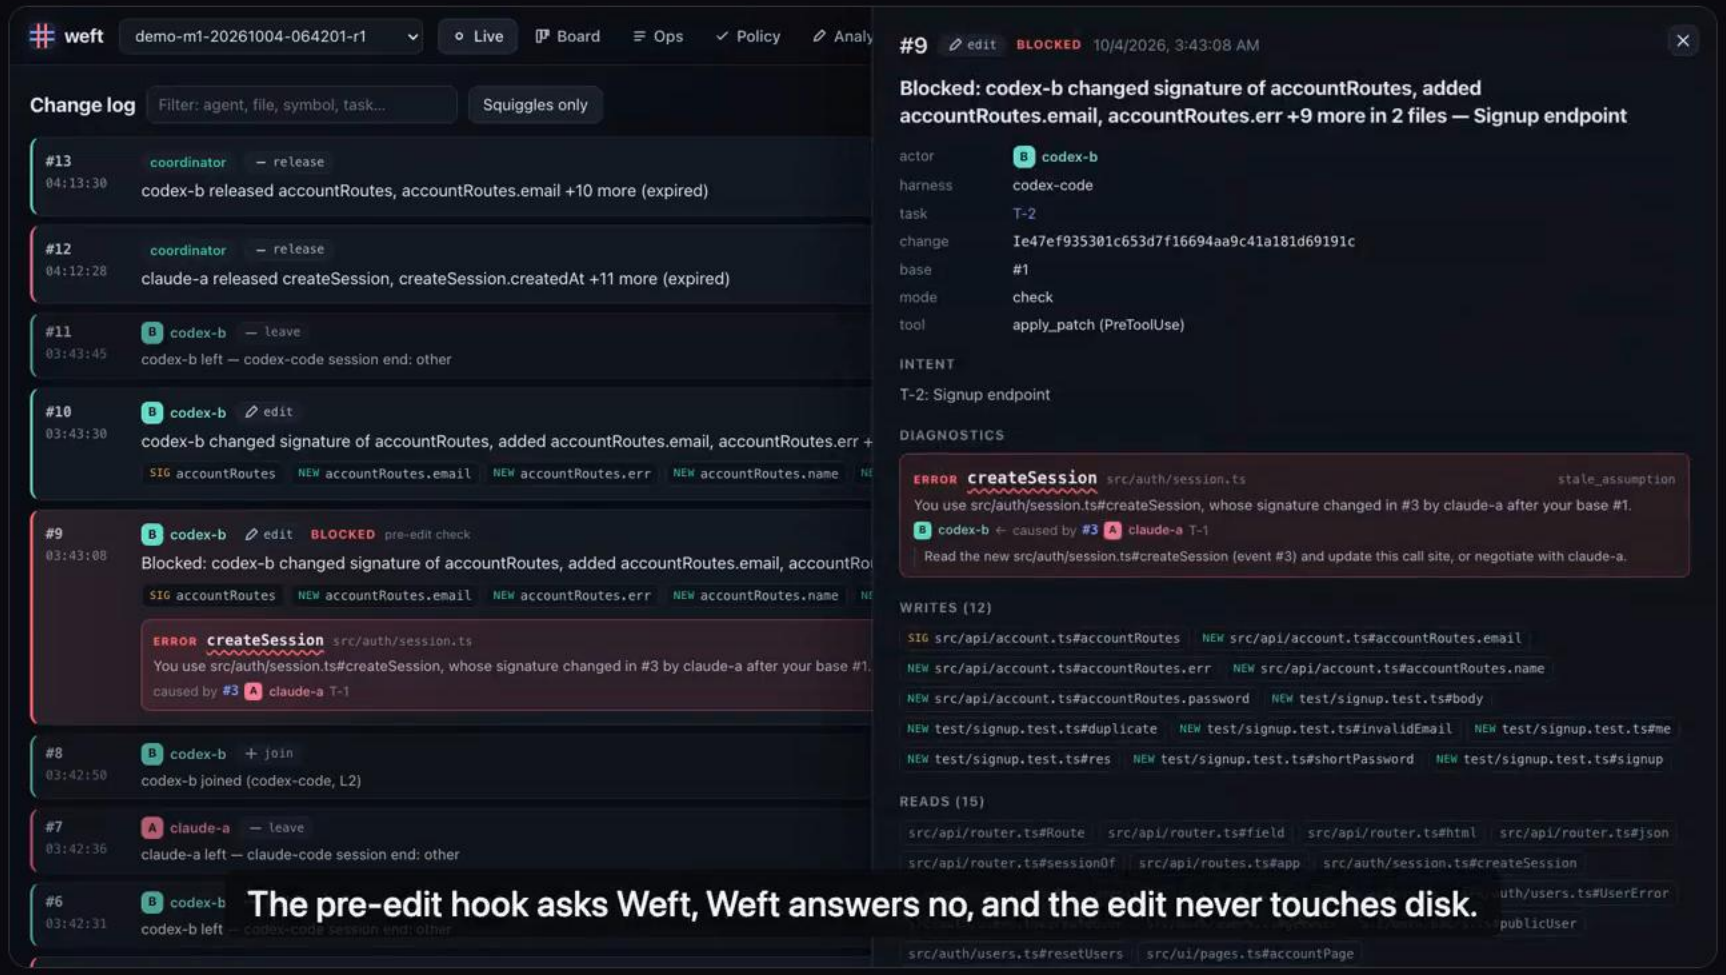

Claude Code changes `createSession` → Codex's edit is refused → it adapts → accepted

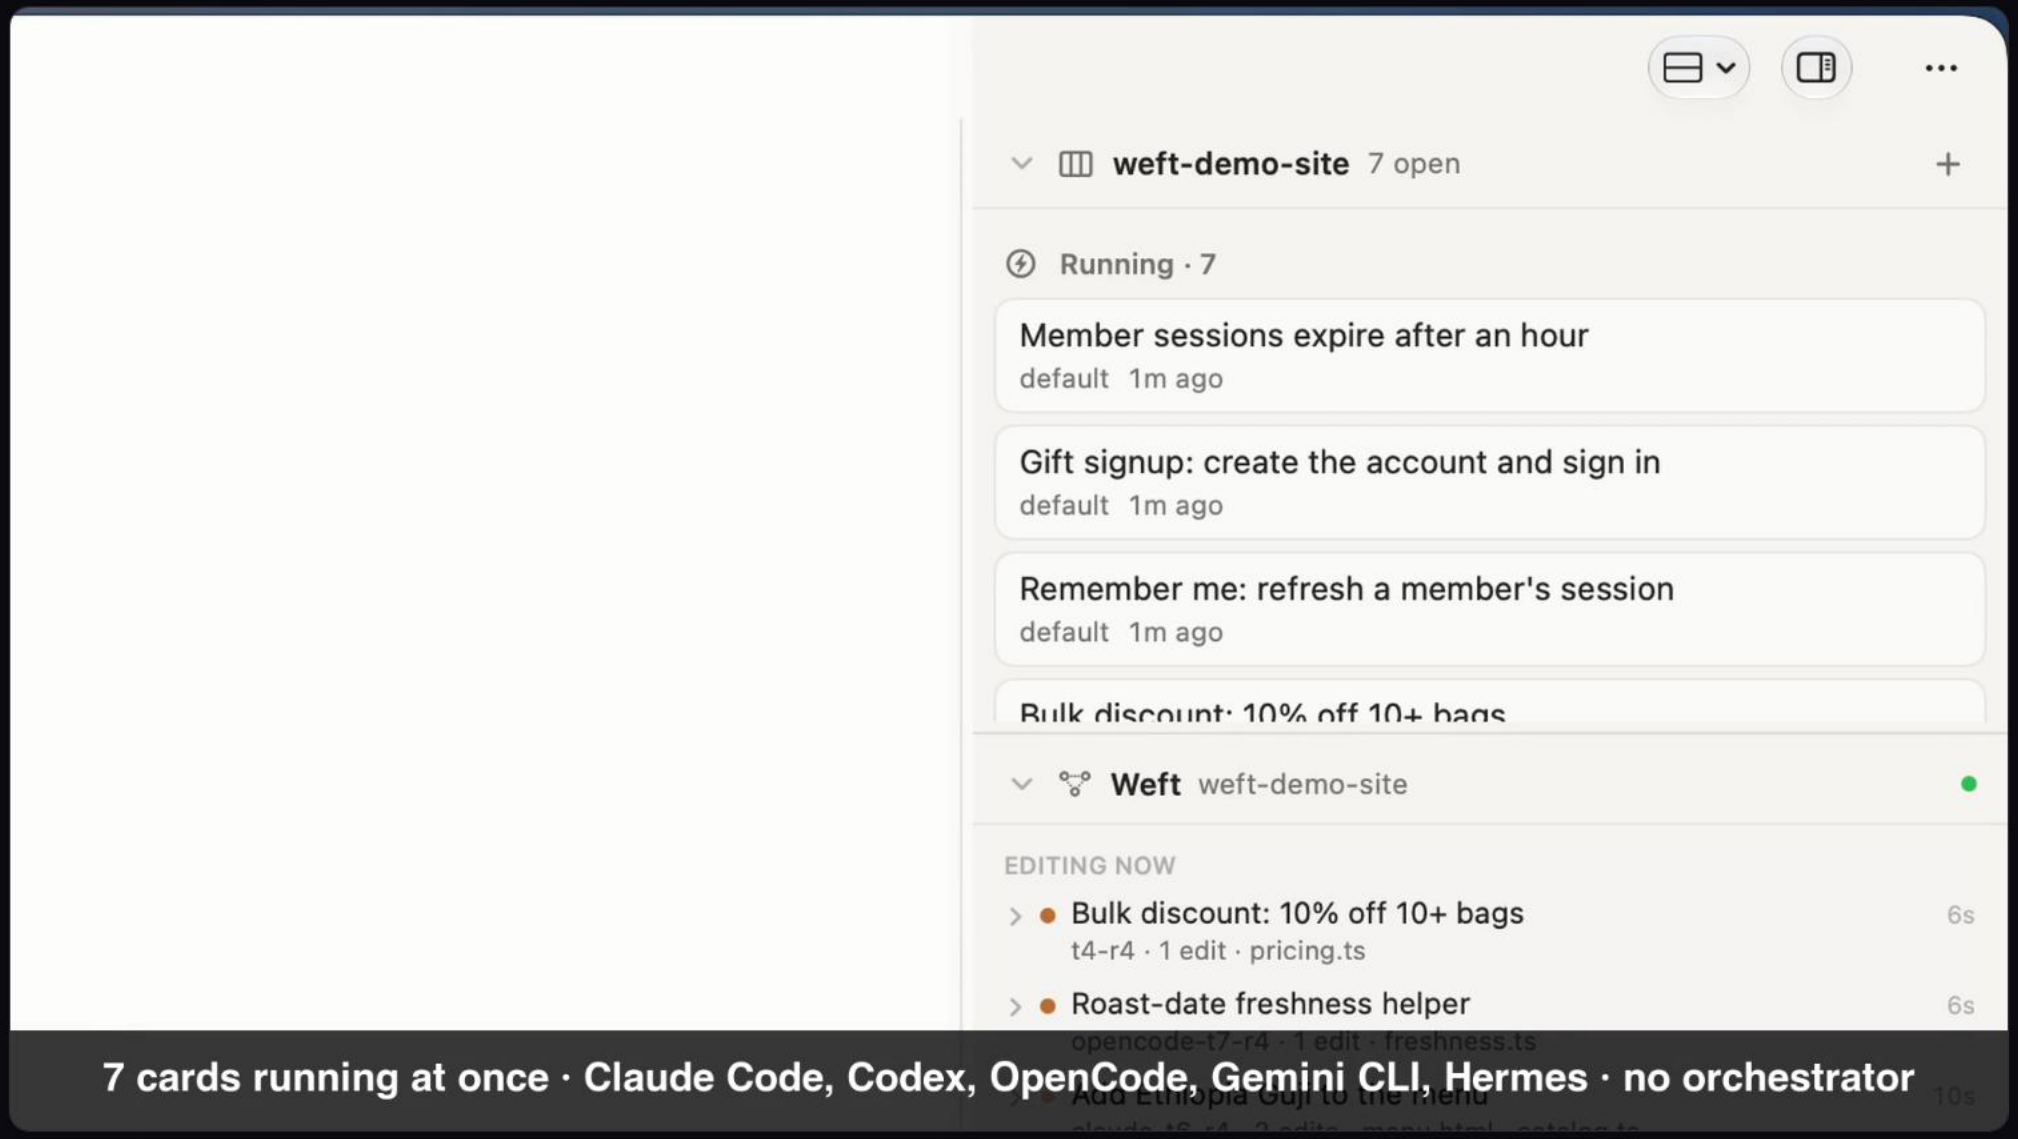

7 cards running at once · Claude Code, Codex, OpenCode, Gemini CLI, Hermes · no orchestrator

7 cards at once · candidates on 5 harnesses · **no agent in charge** · 6 squiggles, all rerouted · all 7 landed

What happens when they make conflicting changes?


1 Refused before it's written
a stale_assumption squiggle quotes the other agent's change

2 Reroute or negotiate
propose an overload · accept · counter

3 Priority decides who adapts
same rule every time: no deadlocks

4 Structural merge
Mergiraf, not line-by-line

5 Land
compare-and-swap on trunk: main moves only if nothing moved

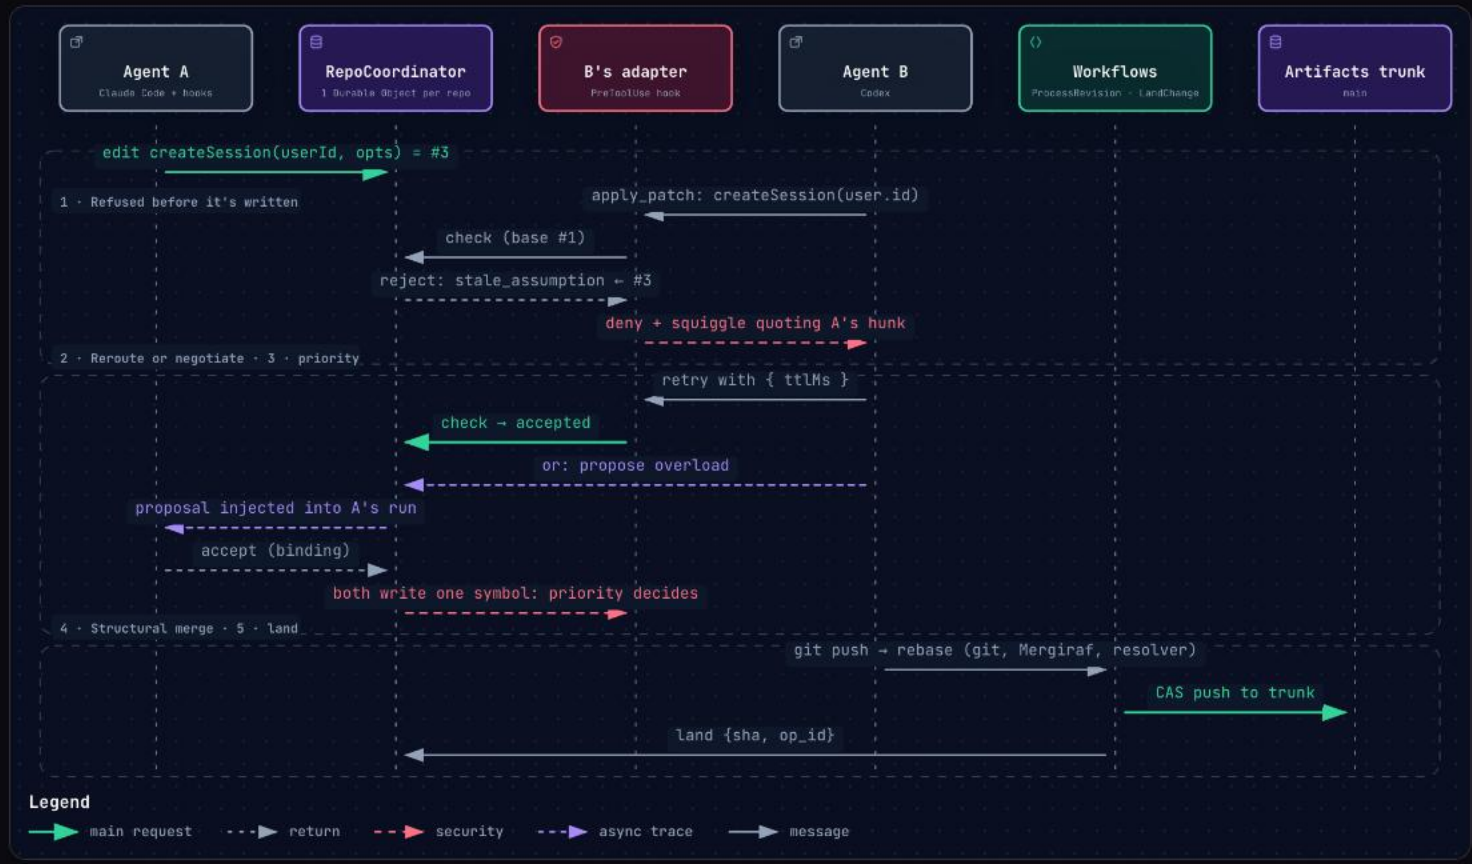

Traced from the code · deny → reroute as in the M1 run (Claude Code vs Codex) · interactive ↗

3 · QUESTION 3 OF 4

How do you review everything they produce?

Humans get a feed, not a merge queue.


An evidence pipeline for every candidate:

Tests	Preview	Screenshots + pixel diff	Risk tier	Review agent acceptance criteria, fails closed

Low risk lands on its own. **Higher risk waits for a human.**

Production errors spike after a landing → Weft reverts it.

In the Otto run: a planted bug was reverted **32 s** after it landed.

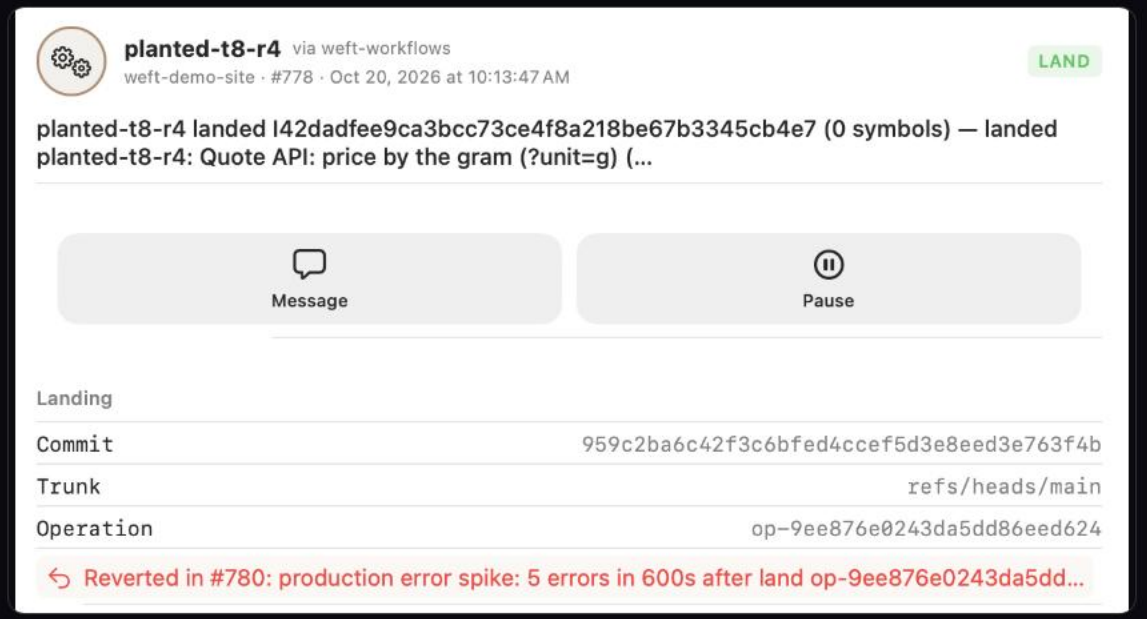

3 · QUESTION 4 OF 4

How do you keep track of why?

```
Change-Id: I2e59ce5c1eaa4d57a28a2a5c8f9458bdcd8fd4f3
Task-Id:   agent-issue-4-continue
Agent-Id:  wt-4-agent-issue-4-continue
```

Every commit carries its change, task and agent.

Every squiggle cites the event that caused it (#834 ← #813).

The log replays byte for byte · each run's model transcript is stored.

A revert names the operation it undoes, and why.

WHY ARTIFACTS + CLOUDFLARE

Weft doesn't need Artifacts to work. **Artifacts is how it scales.**

Durable Objects	One authoritative, ordered log and submit queue per repo.
Artifacts	The trunk, plus an isolated fork for every candidate change.
Queues and Workflows	Durable, retryable processing, selection, landing and auto-revert.
Containers	Git, builds and tests in a sandbox, with credentials kept outside.
D1 and R2	An index of tasks and changes, and the evidence behind each one.

Red squiggles for teams of coding agents.

Coordination, not Orchestration

Two agents, one repo, five minutes.

No Cloudflare account needed.

weft-site.elier.ai

John Nelson · johnaaronnelson.com · github.com/celador