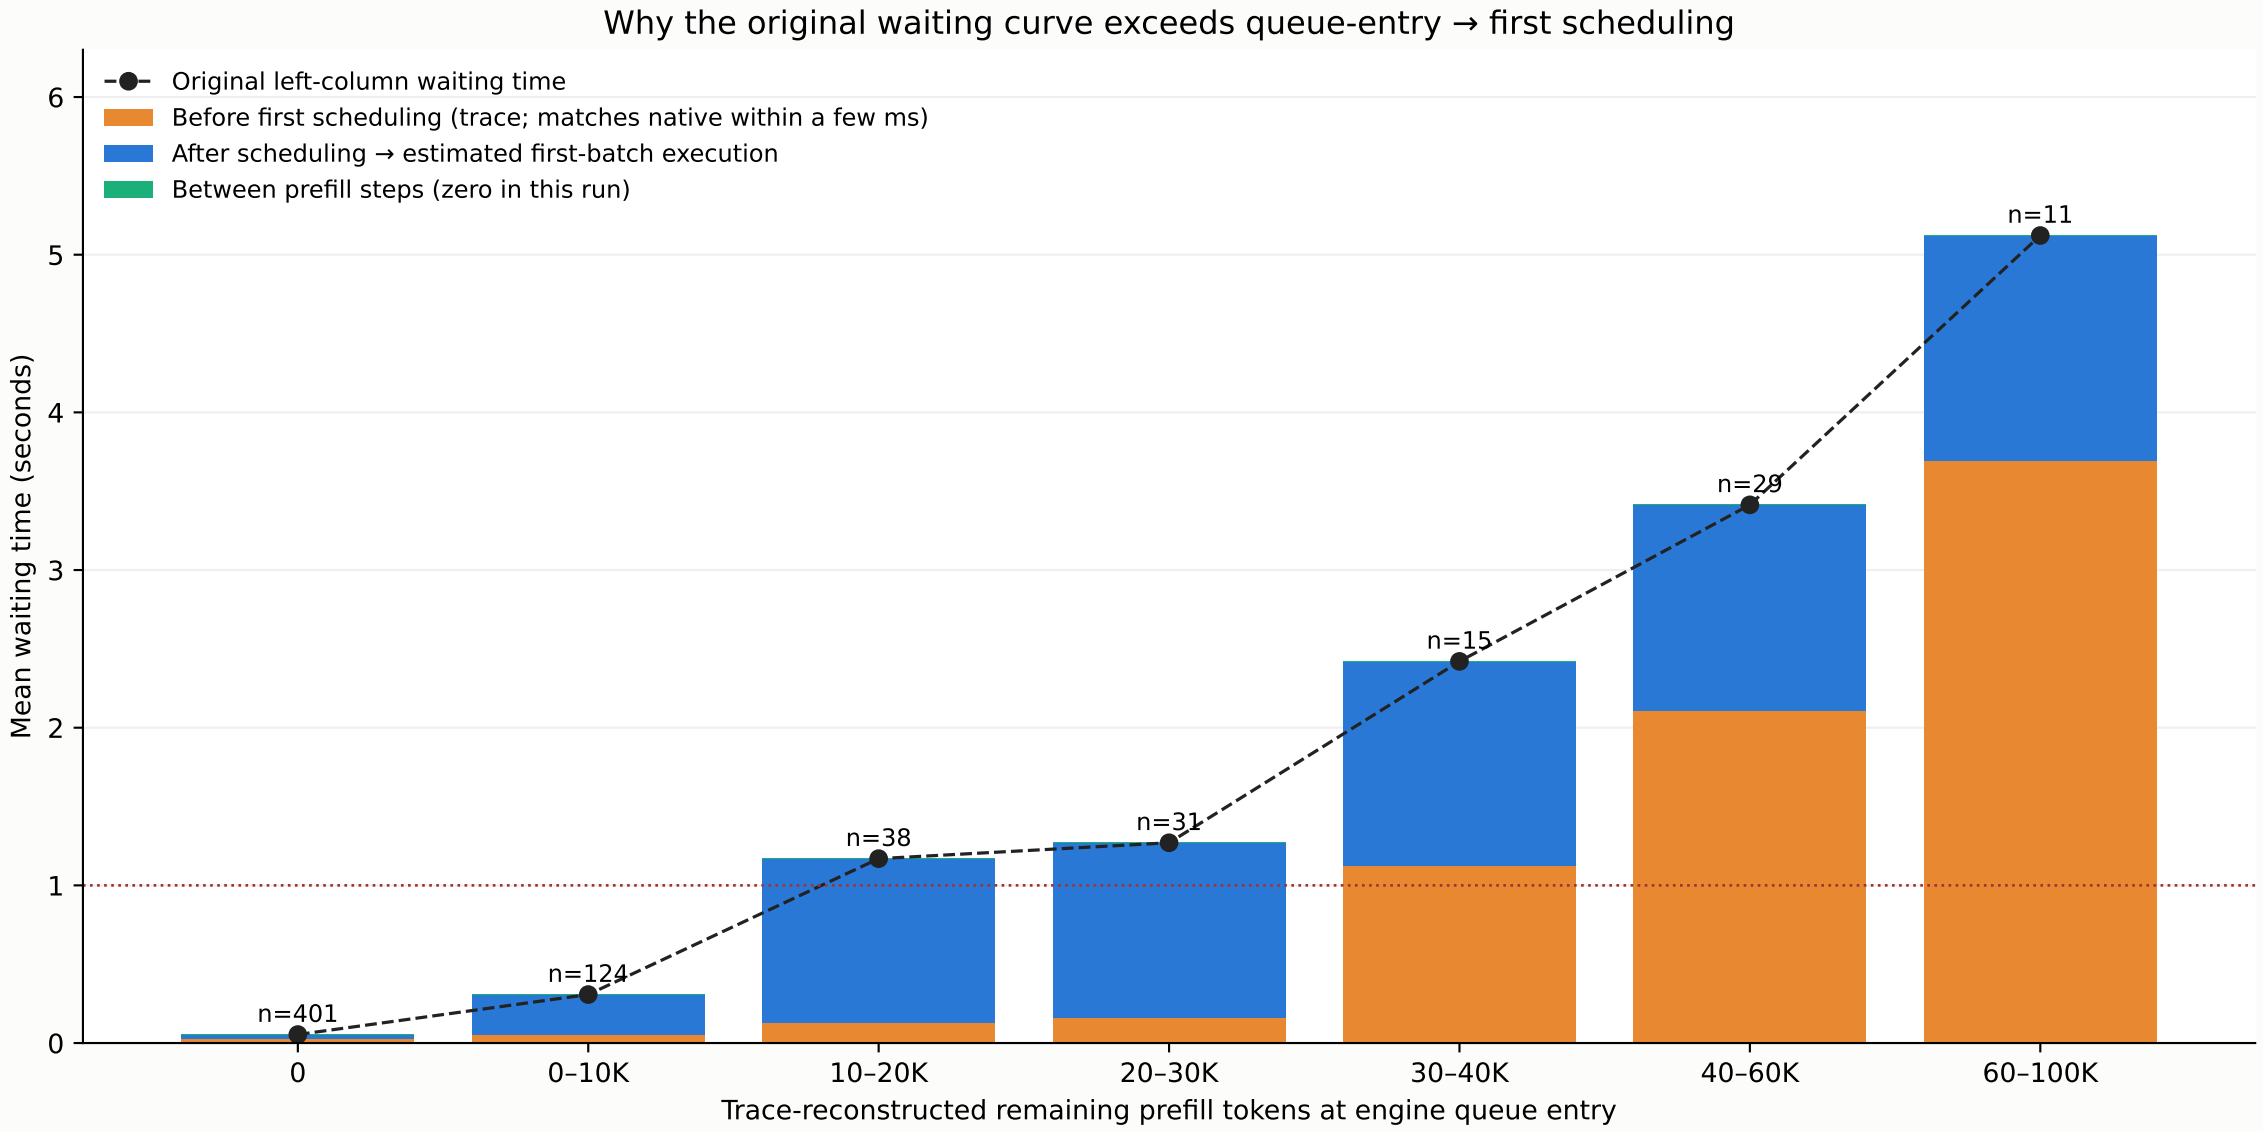

Execution start is reconstructed as max(batch scheduling, previous batch completion), matching the original plots.
These are scheduler/output timestamps, not CUDA kernel start events. Sub-millisecond bookkeeping residuals are retained in the CSV.